TEST REPORT

CERTIFICATE OF CONFORMITY

Standard:	**47 CFR FCC Part 15, Subpart E (Section 15.407)**
Report No.:	PRBWIN-WTW-P22110682-1
Product:	Qualcomm WiFi 7/BT Combo module
Brand:	Qualcomm
Model No.:	QCNCM865
Received Date:	2022/11/24
Test Date:	2023/1/11 ~ 2023/4/27
Issued Date:	2023/5/11
Applicant:	Qualcomm Technologies, Inc.
Address:	5775 Morehouse Drive, San Diego, CA 92121-1714
Issued By:	Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory
Lab Address:	E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
Test Location:	E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan
FCC Registration / Designation Number:	723255 / TW2022

Approved by: _____ , **Date:** **2023/5/11**

May Chen / Manager

This test report consists of 835 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.

Prepared by : Claire Kuan / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/ and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record **4**

1 Certificate **5**

2 Summary of Test Results **6**

2.1 Measurement Uncertainty 6
2.2 Supplementary Information 6

3 General Information **7**

3.1 General Description of EUT 7
3.2 Antenna Description of EUT 9
3.3 Channel List 10
3.4 Test Mode Applicability and Tested Channel Detail 12
3.5 Duty Cycle of Test Signal 21
3.6 Test Program Used and Operation Descriptions 25
3.7 Connection Diagram of EUT and Peripheral Devices 25
3.8 Configuration of Peripheral Devices and Cable Connections 27

4 Test Instruments **28**

4.1 26 dB Bandwidth 28
4.2 RF Output Power 28
4.3 Power Spectral Density 28
4.4 6 dB Bandwidth 28
4.5 Occupied Bandwidth 28
4.6 Frequency Stability 29
4.7 AC Power Conducted Emissions 29
4.8 Unwanted Emissions below 1 GHz 30
4.9 Unwanted Emissions above 1 GHz 31

5 Limits of Test Items **32**

5.1 26 dB Bandwidth 32
5.2 RF Output Power 32
5.3 Power Spectral Density 32
5.4 6 dB Bandwidth 32
5.5 Occupied Bandwidth 32
5.6 Frequency Stability 33
5.7 AC Power Conducted Emissions 33
5.8 Unwanted Emissions below 1 GHz 33
5.9 Unwanted Emissions above 1 GHz 34

6 Test Arrangements **35**

6.1 26 dB Bandwidth 35
6.1.1 Test Setup 35
6.1.2 Test Procedure 35
6.2 RF Output Power 36
6.2.1 Test Setup 36
6.2.2 Test Procedure 36
6.3 Power Spectral Density 37
6.3.1 Test Setup 37
6.3.2 Test Procedure 37
6.4 6 dB Bandwidth 37
6.4.1 Test Setup 37
6.4.2 Test Procedure 37
6.5 Occupied Bandwidth 38
6.5.1 Test Setup 38
6.5.2 Test Procedure 38
6.6 Frequency Stability 38
6.6.1 Test Setup 38
6.6.2 Test Procedure 38
6.7 AC Power Conducted Emissions 39

Qualcomm Confidential May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

6.7.1 Test Setup 39
6.7.2 Test Procedure 39
6.8 Unwanted Emissions below 1 GHz 40
6.8.1 Test Setup 40
6.8.2 Test Procedure 41
6.9 Unwanted Emissions above 1 GHz 42
6.9.1 Test Setup 42
6.9.2 Test Procedure 43

7 Test Results of Test Item 44

7.1 26 dB Bandwidth 44
7.2 RF Output Power 54
7.3 Power Spectral Density 116
7.4 6 dB Bandwidth 138
7.5 Occupied Bandwidth 142
7.6 Frequency Stability 155
7.7 AC Power Conducted Emissions 156
7.8 Unwanted Emissions below 1 GHz 158
7.9 Unwanted Emissions above 1 GHz 162

8 Pictures of Test Arrangements 821

9 Appendix A – Information of the Testing Laboratories 822

10 Appendix B – Radiated Emission Measurement 823

10.1.1 Limits of Radiated Emission and Bandedge Measurement 823
10.1.2 Test Instruments 824
10.1.3 Test Procedure 824
10.1.4 Deviation from Test Standard 824
10.1.5 Test Setup 825
10.1.6 EUT Operating Condition 825
10.1.7 Test Results 826

Qualcomm Confidential May contain Trade Secrets 2024-06-25 00:58:22 GMT vera.yu@gigabyte.com

Release Control Record

Issue No.	Description	Date Issued
PRBWIN-WTW-P22110682-1	Original release.	2023/5/11

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

1 Certificate

Product:	Qualcomm WiFi 7/BT Combo module
Brand:	Qualcomm
Test Model:	QCNCM865
Sample Status:	Engineering sample
Applicant:	Qualcomm Technologies, Inc.
Test Date:	2023/1/11 ~ 2023/4/27
Standard:	47 CFR FCC Part 15, Subpart E (Section 15.407)
Measurement procedure:	ANSI C63.10-2013 KDB 789033 D02 General UNII Test Procedure New Rules v02r01 KDB 662911 D01 Multiple Transmitter Output v02r01 (Following test report has been performed to fulfill Chile power limit. Therefore test results are applicable for Chile market only.)

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Qualcomm Confidential May Contain Trade Secrets 2024-06-25 00:58:39 GMT vera.yu@gigabyte.com

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407) (Following test report has been performed to fulfill Chile power limit. Therefore test results are applicable for Chile market only.)			
Clause	Test Item	Result	Remark
15.407(a)(2)	26 dB Bandwidth	-	For U-NII-2A U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	RF Output Power	Pass	Meet the requirement of limit.
15.407(a)(1) 15.407(a)(2) 15.407(a)(3)	Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6 dB Bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
---	Occupied Bandwidth	-	Reference only.
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.407(b)(9)	AC Power Conducted Emissions	Pass	Minimum passing margin is -9.75 dB at 0.56795 MHz
15.407(b)(9)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -4.4 dB at 295.42 MHz
15.407(b) (1/10) 15.407(b) (2/10) 15.407(b) (3/10) 15.407(b) (4(i)/10)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -2.0 dB at 5351.90, 5355.57 MHz
15.203	Antenna Requirement	Pass	Antenna connector is MHF 4L not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

QUALCOMM Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT verasu@gigabyte.com

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.1 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.1 dB
	18 GHz ~ 40 GHz	5.3 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Qualcomm WiFi 7/BT Combo module
Brand	Qualcomm
Test Model	QCNCM865
Status of EUT	Engineering sample
Power Supply Rating	3.3Vdc from host equipment
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 1024QAM for OFDM in 11ac mode 4096QAM for OFDMA in 11ax mode 4096QAM for OFDMA in 11be mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: up to 54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 2401.9 Mbps 802.11be: up to 2882.4 Mbps
Operating Frequency	5.18 GHz ~ 5.25 GHz 5.25 GHz ~ 5.32 GHz 5.5 GHz ~ 5.72 GHz 5.745 GHz ~ 5.825 GHz
Number of Channel	802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20): 25 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40): 12 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80): 6 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160): 2
Resource Unit (RU)	Single RU: 26-tone, 52-tone, 106-tone, 242-tone, 484-tone, 996-tone Multi-RU(Small RU): 52-tone + 26-tone, 106-tone + 26-tone Multi-RU (Large RU): 484-tone + 242-tone, 996-tone + 484-tone, 2 * 996-tone
Channel Puncturing (Large RU)	80 MHz punctured by 20 MHz ; 160 MHz punctured by 20 MHz 160 MHz punctured by 40 MHz
Max. EIRP	5.18 GHz ~ 5.25 GHz : 937.562 mW (29.92 dBm) 5.25 GHz ~ 5.32 GHz : 950.605 mW (29.78 dBm) 5.5 GHz ~ 5.72 GHz : 963.829 mW (29.84 dBm) 5.745 GHz ~ 5.825 GHz : 893.305 mW (29.51 dBm)
EUT Category	Client device

Note:

1. There are Bluetooth and WLAN (2.4 GHz & 5 GHz & 5.9 GHz & 6 GHz) technology used for the EUT.
2. Simultaneously transmission condition.

DBS			
Condition	Technology		
1	WLAN(2.4GHz)_Ant 0+1	WLAN(5GHz) _Ant 0+1	
2	WLAN(2.4GHz) _Ant 0+1	WLAN(6GHz) _Ant 0+1	
HBS+BT			
Condition	Technology		
3	Bluetooth_Ant 0+1	WLAN(5GHz) _Ant 0+1	
4	Bluetooth_Ant 0+1	WLAN(6GHz) _Ant 0+1	
5	WLAN(5GHz_U-NII-1, U-NII-2A) _Ant 0+1	WLAN(5GHz_U-NII-2C, U-NII-3, U-NII-4) _Ant 0+1	Bluetooth
6	WLAN(5GHz_U-NII-1, U-NII-2A) _Ant 0+1	WLAN(6GHz) _Ant 0+1	Bluetooth
Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.			

QUALCOMM Confidential and Proprietary – Qualcomm Technologies, Inc. May contain Trade Secrets

3. QCNCM865 has HW variant SKUs below to support different Microsoft Windows platform system and feature:

SKU	Support platform system and feature
NCM865	**X86 platform, support DBS and HBS**
NCM865A	Qualcomm platform, support DBS and HBS
NCM835	X86 platform, support DBS
NCM835A	Qualcomm platform, support DBS
Note: From the above SKUs, the worst was found in **SKU (NCM865)**. Therefore only the test data of the modes were recorded in this report.	

4. The EUT support OFDMA and Partial RU mode, therefore partial RU combination were investigated and the worst case scenario was identified. (The worst case data were presented in section 3.4)
5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna Set	RF Chain No.	Brand	Model	Antenna Net Gain (dBi)	Frequency Range	Cable Loss (dB)	Antenna Type	Connector Type	Cable Length
1	Chain0/1	Hong-Bo	260-25094	3.53 3.06 3.07 4.81 4.2	2.4~2.4835GHz 5.15~5.25GHz 5.25~5.35GHz 5.47~5.725GHz 5.725~5.850GHz	0.74 1.16 1.18 1.26 1.28	PIFA	MHF 4L	300mm
2	Chain0/1	Hong-Bo	260-25083	5.09 5.14 5.09 5.16 5.12	5.850~5.895 GHz 5.925~6.425 GHz 6.425~6.525 GHz 6.525~6.875 GHz 6.875~7.125 GHz	1.29 1.35 1.38 1.45 1.50	PIFA	MHF 4L	300mm
3	Chain0/1	Hong-Bo	260-25084	3.22 3.35 3.42 4.77 4.72 4.71 4.75 4.29 4.81 4.74	2.4~2.4835 GHz 5.150~5.250 GHz 5.250~5.350 GHz 5.470~5.725 GHz 5.725~5.850 GHz 5.850~5.895 GHz 5.925~6.425 GHz 6.425~6.525 GHz 6.525~6.875 GHz 6.875~7.125 GHz	0.49 0.76 0.77 0.80 0.84 0.84 0.86 0.91 0.96 0.98	Monopole	MHF 4L	200mm

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

5 GHz Band		
Modulation Mode	**TX & RX Configuration**	
802.11a	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
802.11ac (VHT20)	2TX	2RX
802.11ac (VHT40)	2TX	2RX
802.11ac (VHT80)	2TX	2RX
802.11ac (VHT160)	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
802.11ax (HE80)	2TX	2RX
802.11ax (HE160)	2TX	2RX
802.11be (EHT20)	2TX	2RX
802.11be (EHT40)	2TX	2RX
802.11be (EHT80)	2TX	2RX
802.11be (EHT160)	2TX	2RX
802.11ax (RU26/52/106/242/484/996/2x996)	2TX	2RX
802.11be (RU26/52/106/242/484/996/2x996 MRU52+26/106+26/ 484+242/996+484/996+484+242)	2TX	2RX

Note:

1. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), 802.11ac mode for 20MHz (40MHz, 80MHz, 160MHz), 802.11ax mode for 20MHz (40MHz, 80MHz, 160MHz) and 802.11be mode for 20MHz (40MHz, 80MHz, 160MHz) therefore the manufacturer will control the power for 802.11n/ac/ax mode is same as the 802.11be mode or more lower than it and investigated worst case to representative mode in test report.

Qualcomm Confidential May Contain Trade Secrets 2024-06-25 00:15:32 NT verayu@gigabyte.com

3.3 Channel List

FOR 5180 ~ 5320 MHz

8 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	52	5260 MHz
40	5200 MHz	56	5280 MHz
44	5220 MHz	60	5300 MHz
48	5240 MHz	64	5320 MHz

4 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	54	5270 MHz
46	5230 MHz	62	5310 MHz

2 channels are provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz

1 straddle channel is provided for 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
50	5250 MHz

FOR 5500 ~ 5720 MHz

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	138	5690 MHz
122	5610 MHz		

1 channels are provided for 802.11ac (VHT160), 802.11ax (HE160), 802.11be (EHT160):

Channel	Frequency
114	5570 MHz

Qualcomm Confidential - May Contain Trade Secrets
2022-06-23 10:58:32 GMT
ericyu@gigabyte.com

FOR 5745 ~ 5825 MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20), 802.11be (EHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40), 802.11be (EHT40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80), 802.11be (EHT80):

Channel	Frequency
155	5775 MHz

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below:

Test Item	EUT Configure Mode	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter	RU/MRU Index
26 dB Bandwidth	A	802.11a	CDD	52, 60, 64 100, 116, 140, 144	BPSK	6Mb/s	NA
		802.11be (EHT20)	CDD	52, 60, 64 100, 116, 140, 144	BPSK	MCS0	NA
		802.11be (EHT40)	CDD	54, 62, 102, 110, 134, 142	BPSK	MCS0	NA
		802.11be (EHT80)	CDD	58 106, 122, 138	BPSK	MCS0	NA
		802.11be (EHT160)	CDD	50 114	BPSK	MCS0	NA
		802.11be (EHT20) 26-tone RU	CDD	52, 60, 64 100, 116, 140, 144	BPSK	MCS0	0, 0, 8 0, 0, 8, 8
		802.11be (EHT20) 52-tone RU	CDD	52, 60, 64 100, 116, 140, 144	BPSK	MCS0	37, 37, 40 37, 37, 40, 40
		802.11be (EHT20) 106-tone RU	CDD	52, 60, 64 100, 116, 140, 144	BPSK	MCS0	53, 53, 54 53, 53, 54, 54
		802.11be (EHT80) 484+242-tone MRU	CDD	138	BPSK	MCS0	UL_RU484+242_Punc 20_91_MCS0
		802.11be (EHT160) 996+484-tone MRU	CDD	50	BPSK	MCS0	UL_RU996+484_Punc 40_MCS0
		802.11be (EHT80) Punctured by 20 MHz	CDD	138	BPSK	MCS0	EHT80_SU_Punct20_ Mid2
		802.11be (EHT160) Punctured by 20 MHz	CDD	50	BPSK	MCS0	EHT160_SU_Punct20_ Mid3
		802.11be (EHT160) Punctured by 40 MHz	CDD	50	BPSK	MCS0	EHT160_SU_Punct40_ Mid2

Qualcomm Confidential – May Contain Trade Secrets
2024-06-25 05:32 GMT
verayw@qualcomm.com

RF Output Power	A	802.11a	CDD	36, 40, 48	BPSK	6Mb/s	NA
				52, 60, 64			
				100, 116, 140, 144			
				149, 157, 165			
		802.11be (EHT20)	CDD	36, 40, 48	BPSK	MCS0	NA
				52, 60, 64			
				100, 116, 140, 144			
				149, 157, 165			
		802.11be (EHT40)	CDD	38, 46	BPSK	MCS0	NA
				54, 62			
				102, 110, 134, 142			
				151, 159			
		802.11be (EHT80)	CDD	42	BPSK	MCS0	NA
				58			
				106, 122, 138			
				155			
		802.11be (EHT160)	CDD	50	BPSK	MCS0	NA
				114			
		802.11be (EHT20) 26-tone RU	CDD	36, 40, 48	BPSK	MCS0	0, 0, 8
				52, 60, 64			0, 0, 8
				100, 116, 140, 144			0, 0, 8, 8
				149, 157, 165			0, 0, 8
		802.11be (EHT20) 52-tone RU	CDD	36, 40, 48	BPSK	MCS0	37, 37, 40
				52, 60, 64			37, 37, 40
				100, 116, 140, 144			37, 37, 40, 40
				149, 157, 165			37, 37, 40
		802.11be (EHT20) 106-tone RU	CDD	36, 40, 48	BPSK	MCS0	53, 53, 54
				52, 60, 64			53, 53, 54
				100, 116, 140, 144			53, 53, 54, 54
				149, 157, 165			53, 53, 54
		802.11be (EHT20) 242-tone RU	CDD	40	BPSK	MCS0	NA
				64			
				116			
				165			
		802.11be (EHT40) 484-tone RU	CDD	46	BPSK	MCS0	NA
				62			
				110			
				159			
		802.11be (EHT80) 996-tone RU	CDD	42	BPSK	MCS0	NA
				58			
				138			
				155			
		802.11be (EHT160) 2x996-tone RU	CDD	50	BPSK	MCS0	NA
				114			

Qualcomm Confidential – May Contain Trade Secrets 2024-06-25 05:40:37 GMT vera.yu@bureauveritas.com

RF Output Power	A	802.11be (EHT20) 52+26-tone MRU	CDD	40	BPSK	MCS0	UL_RU52+26_Low_70_MCS0
				64			UL_RU52+26_High_72_MCS0
				116			UL_RU52+26_Low_70_MCS0
				165			UL_RU52+26_High_72_MCS0
		802.11be (EHT20) 106+26-tone MRU	CDD	40	BPSK	MCS0	UL_RU106+26_Low_82_MCS0
				64			UL_RU106+26_High_83_MCS0
				116			UL_RU106+26_Low_82_MCS0
				165			UL_RU106+26_High_83_MCS0
		802.11be (EHT80) 484+242-tone MRU	CDD	42	BPSK	MCS0	UL_RU484+242_Punc20_91_MCS0
				58			
				138			
				155			
		802.11be (EHT160) 996+484-tone MRU	CDD	50	BPSK	MCS0	UL_RU996+484_Punc40_MCS0 UL_RU996+484_Low_MCS0
				114			
		802.11be (EHT80) Punctured by 20 MHz	CDD	42	BPSK	MCS0	EHT80_SU_Punct20_Mid2
				58			
				138			
				155			
		802.11be (EHT160) Punctured by 20 MHz	CDD	50	BPSK	MCS0	EHT160_SU_Punct20_Mid3
				114			EHT160_SU_Punct20_High
		802.11be (EHT160) Punctured by 40 MHz	CDD	50	BPSK	MCS0	EHT160_SU_Punct40_Mid2
				114			EHT160_SU_Punct40_High
	C	802.11be (EHT20) 26-tone RU	CDD	36, 40, 48	BPSK	MCS0	0, 0, 8
				52, 60, 64			0, 0, 8
				100, 116, 140, 144			0, 0, 8, 8
		802.11be (EHT20) 52-tone RU	CDD	36, 40, 48	BPSK	MCS0	37, 37, 40
				52, 60, 64			37, 37, 40
				100, 116, 140, 144			37, 37, 40, 40
		802.11be (EHT20) 52+26-tone MRU	CDD	40	BPSK	MCS0	UL_RU52+26_Low_70_MCS0
				64			UL_RU52+26_High_72_MCS0
				116			UL_RU52+26_Low_70_MCS0

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:16:32 GMT vera.yu@gigabyte.com

Power Spectral Density	A	802.11a	CDD	36, 40, 48	BPSK	6Mb/s	NA
				52, 60, 64			
				100, 116, 140, 144			
				149, 157, 165			
		802.11be (EHT20)	CDD	36, 40, 48	BPSK	MCS0	NA
				52, 60, 64			
				100, 116, 140, 144			
				149, 157, 165			
		802.11be (EHT40)	CDD	38, 46	BPSK	MCS0	NA
				54, 62			
				102, 110, 134, 142			
				151, 159			
		802.11be (EHT80)	CDD	42	BPSK	MCS0	NA
				58			
				106, 122, 138			
				155			
		802.11be (EHT160)	CDD	50	BPSK	MCS0	NA
				114			
		802.11be (EHT20) 26-tone RU	CDD	36, 40, 48	BPSK	MCS0	0, 0, 8
				52, 60, 64			0, 0, 8
				100, 116, 140, 144			0, 0, 8, 8
				149, 157, 165			0, 0, 8
		802.11be (EHT20) 52-tone RU	CDD	36, 40, 48	BPSK	MCS0	37, 37, 40
				52, 60, 64			37, 37, 40
				100, 116, 140, 144			37, 37, 40, 40
				149, 157, 165			37, 37, 40
		802.11be (EHT20) 106-tone RU	CDD	36, 40, 48	BPSK	MCS0	53, 53, 54
				52, 60, 64			53, 53, 54
				100, 116, 140, 144			53, 53, 54, 54
				149, 157, 165			53, 53, 54
		802.11be (EHT20) 242-tone RU	CDD	40	BPSK	MCS0	NA
				64			
				116			
				165			
		802.11be (EHT40) 484-tone RU	CDD	46	BPSK	MCS0	NA
				62			
				110			
				159			
		802.11be (EHT80) 996-tone RU	CDD	42	BPSK	MCS0	NA
				58			
				138			
				155			
		802.11be (EHT160) 2x996-tone RU	CDD	50	BPSK	MCS0	NA
				114			

Qualcomm Confidential – Contains Qualcomm Trade Secrets
2024-06-27 Nov 6, 2024 ver a.yu@qualcomm.com

Power Spectral Density	A	802.11be (EHT20) 52+26-tone MRU	CDD	40	BPSK	MCS0	UL_RU52+26_Low_70_MCS0
				64			UL_RU52+26_High_72_MCS0
				116			UL_RU52+26_Low_70_MCS0
				165			UL_RU52+26_High_72_MCS0
		802.11be (EHT20) 106+26-tone MRU	CDD	40	BPSK	MCS0	UL_RU106+26_Low_82_MCS0
				64			UL_RU106+26_High_83_MCS0
				116			UL_RU106+26_Low_82_MCS0
				165			UL_RU106+26_High_83_MCS0
		802.11be (EHT80) 484+242-tone MRU	CDD	42	BPSK	MCS0	UL_RU484+242_Punc20_91_MCS0
				58			
				138			
				155			
		802.11be (EHT160) 996+484-tone MRU	CDD	50	BPSK	MCS0	UL_RU996+484_Punc40_MCS0 UL_RU996+484_Low_MCS0
				114			
		802.11be (EHT80) Punctured by 20 MHz	CDD	42	BPSK	MCS0	EHT80_SU_Punct20_Mid2
				58			
				138			
				155			
		802.11be (EHT160) Punctured by 20 MHz	CDD	50	BPSK	MCS0	EHT160_SU_Punct20_Mid3
				114			EHT160_SU_Punct20_High
		802.11be (EHT160) Punctured by 40 MHz	CDD	50	BPSK	MCS0	EHT160_SU_Punct40_Mid2
				114			EHT160_SU_Punct40_High

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:16:32 GMT vera.yu@gigabyte.com

6 dB Bandwidth	A	802.11a	CDD	144 149, 157, 165	BPSK	6Mb/s	NA
		802.11be (EHT20)	CDD	144 149, 157, 165	BPSK	MCS0	NA
		802.11be (EHT40)	CDD	142 151, 159	BPSK	MCS0	NA
		802.11be (EHT80)	CDD	138 155	BPSK	MCS0	NA
		802.11be (EHT20) 26-tone RU	CDD	149, 157, 165	BPSK	MCS0	0, 0, 8
		802.11be (EHT20) 52-tone RU	CDD	149, 157, 165	BPSK	MCS0	37, 37, 40
		802.11be (EHT20) 106-tone RU	CDD	149, 157, 165	BPSK	MCS0	53, 53, 54
		802.11be (EHT80) 484+242-tone MRU	CDD	138, 155	BPSK	MCS0	UL_RU484+242_Punc 20_91_MCS0
		802.11be (EHT80) Punctured by 20 MHz	CDD	138, 155	BPSK	MCS0	EHT80_SU_Punct20_ Mid2
Occupied Bandwidth	A	802.11a	CDD	36, 40, 48 52, 60, 64 100, 116, 140, 144 149, 157, 165	BPSK	6Mb/s	NA
		802.11be (EHT20)	CDD	36, 40, 48 52, 60, 64 100, 116, 140, 144 149, 157, 165	BPSK	MCS0	NA
		802.11be (EHT40)	CDD	38, 46, 54, 62, 102, 110, 134, 142, 151, 159	BPSK	MCS0	NA
		802.11be (EHT80)	CDD	42, 58, 106, 122, 138, 155	BPSK	MCS0	NA
		802.11be (EHT160)	CDD	50, 114	BPSK	MCS0	NA
		802.11be (EHT20) 26-tone RU	CDD	36, 40, 48, 52, 60, 64, 100, 116, 140, 144, 149, 157, 165	BPSK	MCS0	0, 0, 8 0, 0, 8 0, 0, 8, 8 0, 0, 8

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:56:32 GMT Vera.Yu@alibyte.com

Occupied Bandwidth	A	802.11be (EHT20) 52-tone RU	CDD	36, 40, 48,	BPSK	MCS0	37, 37, 40
				52, 60, 64,			37, 37, 40
				100, 116, 140, 144,			37, 37, 40, 40
				149, 157, 165			37, 37, 40
		802.11be (EHT20) 106-tone RU	CDD	36, 40, 48,	BPSK	MCS0	53, 53, 54
				52, 60, 64,			53, 53, 54
				100, 116, 140, 144,			53, 53, 54, 54
				149, 157, 165			53, 53, 54
		802.11be (EHT80) 484+242-tone MRU	CDD	138	BPSK	MCS0	UL_RU484+242_Punc 20_91_MCS0
				155			
		802.11be (EHT160) 996+484-tone MRU	CDD	50	BPSK	MCS0	UL_RU996+484_Punc 40_MCS0
		802.11be (EHT80) Punctured by 20 MHz	CDD	42	BPSK	MCS0	EHT80_SU_Punct20_ Mid2
				58			
				138			
				155			
		802.11be (EHT160) Punctured by 20 MHz	CDD	50	BPSK	MCS0	EHT160_SU_Punct20_ Mid3
		802.11be (EHT160) Punctured by 40 MHz	CDD	50	BPSK	MCS0	EHT160_SU_Punct40_ Mid2
Frequency Stability	A	802.11a	-	36	BPSK	6Mb/s	NA
AC Power Conducted Emissions	B	802.11be (EHT20)	CDD	116	BPSK	MCS0	NA
Unwanted Emissions below 1 GHz	A, B	802.11be (EHT20)	CDD	116	BPSK	MCS0	NA
Unwanted Emissions above 1 GHz	A, B	802.11a	CDD	36, 40, 48	BPSK	6Mb/s	NA
				52, 60, 64			
				100, 116, 140, 144			
				149, 157, 165			
		802.11be (EHT20)	CDD	36, 40, 48	BPSK	MCS0	NA
				52, 60, 64			
				100, 116, 140, 144			
				149, 157, 165			
		802.11be (EHT40)	CDD	38, 46	BPSK	MCS0	NA
				54, 62			
				102, 110, 134, 142			
				151, 159			

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

Unwanted Emissions above 1 GHz	A, B	802.11be (EHT80)	CDD	42	BPSK	MCS0	NA
				58			
				106, 122, 138			
				155			
		802.11be (EHT160)	CDD	50,	BPSK	MCS0	NA
				114			
		802.11be (EHT20) 26-tone RU	CDD	36, 40, 48	BPSK	MCS0	0, 0, 8
				52, 60, 64			0, 0, 8
				100, 116, 140, 144			0, 0, 8, 8
				149, 157, 165			0, 0, 8
		802.11be (EHT20) 52-tone RU	CDD	36, 40, 48	BPSK	MCS0	37, 37, 40
				52, 60, 64			37, 37, 40
				100, 116, 140, 144			37, 37, 40, 40
				149, 157, 165			37, 37, 40
		802.11be (EHT20) 106-tone RU	CDD	36, 40, 48,	BPSK	MCS0	53, 53, 54
				52, 60, 64,			53, 53, 54
				100, 116, 140, 144,			53, 53, 54, 54
				149, 157, 165			53, 53, 54
		802.11be (EHT20) 242-tone RU	CDD	40	BPSK	MCS0	NA
				64			
				116			
				165			
		802.11be (EHT40) 484-tone RU	CDD	46	BPSK	MCS0	NA
				62			
				110			
				159			
		802.11be (EHT80) 996-tone RU	CDD	42	BPSK	MCS0	NA
				58			
				138			
				155			
		802.11be (EHT160) 2x996-tone RU	CDD	50	BPSK	MCS0	NA
				114			
		802.11be (EHT20) 52+26-tone MRU	CDD	40	BPSK	MCS0	UL_RU52+26_Low_70_MCS0
				64			UL_RU52+26_High_72_MCS0
				116			UL_RU52+26_Low_70_MCS0
				165			UL_RU52+26_High_72_MCS0
		802.11be (EHT20) 106+26-tone MRU	CDD	40	BPSK	MCS0	UL_RU106+26_Low_82_MCS0
				64			UL_RU106+26_High_83_MCS0
				116			UL_RU106+26_Low_82_MCS0
				165			UL_RU106+26_High_83_MCS0


Qualcomm Confidential - May contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

Unwanted Emissions above 1 GHz	A, B	802.11be (EHT80) 484+242-tone MRU	CDD	42	BPSK	MCS0	UL_RU484+242_Punc 20_91_MCS0
				58			
				138			
				155			
		802.11be (EHT160) 996+484-tone MRU	CDD	50	BPSK	MCS0	UL_RU996+484_Punc 40_MCS0 UL_RU996+484_Low_ MCS0
				114			
		802.11be (EHT80) Punctured by 20 MHz	CDD	42	BPSK	MCS0	EHT80_SU_Punct20_ Mid2
				58			
				138			
				155			
		802.11be (EHT160) Punctured by 20 MHz	CDD	50	BPSK	MCS0	EHT160_SU_Punct20_ Mid3
				114			EHT160_SU_Punct20_ High
		802.11be (EHT160) Punctured by 40 MHz	CDD	50	BPSK	MCS0	EHT160_SU_Punct40_ Mid2
				114			EHT160_SU_Punct40_ High
EUT Configure Mode:	A	EUT only (w/o antenna)_Nss 1					
	B	EUT with 50 ohm terminator_Nss 1					
	C	EUT only (w/o antenna)_Nss 2					


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

3.5 Duty Cycle of Test Signal


802.11a: Duty cycle = 2.088 ms / 2.125 ms x 100% = 98.3%
802.11be (EHT20): Duty cycle = 5.339 ms / 5.365 ms x 100% = 99.5%
802.11be (EHT40): Duty cycle = 5.373 ms / 5.419 ms x 100% = 99.2%
802.11be (EHT80): Duty cycle = 5.256 ms / 5.301 ms x 100% = 99.2%
802.11be (EHT160): Duty cycle = 4.405 ms / 4.458 ms x 100% = 98.8%
802.11be (EHT20) 26-tone RU: Duty cycle = 5.077 ms / 5.13 ms x 100% = 99.0%
802.11be (EHT20) 52-tone RU: Duty cycle = 5.077 ms / 5.13 ms x 100% = 99.0%
802.11be (EHT20) 106-tone RU: Duty cycle = 5.077 ms / 5.13 ms x 100% = 99.0%
802.11be (EHT20) 242-tone RU: Duty cycle = 5.077 ms / 5.13 ms x 100% = 99.0%
802.11be (EHT40) 484-tone RU: Duty cycle = 3.319 ms / 3.357 ms x 100% = 98.9%
802.11be (EHT80) 996-tone RU: Duty cycle = 1.622 ms / 1.654 ms x 100% = 98.1%
802.11be (EHT160) 2x996-tone RU: Duty cycle = 2.148 ms / 2.185 ms x 100% = 98.3%
802.11be (EHT20) 52+26-tone MRU: Duty cycle = 5.077 ms / 5.13 ms x 100% = 99.0%
802.11be (EHT20) 106+26-tone MRU: Duty cycle = 5.077 ms / 5.13 ms x 100% = 99.0%
802.11be (EHT80) 484+242-tone MRU: Duty cycle = 1.622 ms / 1.654 ms x 100% = 98.1%
802.11be (EHT160) 996+484-tone MRU: Duty cycle = 2.148 ms / 2.185 ms x 100% = 98.3%
802.11be (EHT80) Punctured by 20 MHz: Duty cycle = 5.256 ms / 5.301 ms x 100% = 99.2%
802.11be (EHT160) Punctured by 20 MHz: Duty cycle = 4.405 ms / 4.458 ms x 100% = 98.8%
802.11be (EHT160) Punctured by 40 MHz: Duty cycle = 4.405 ms / 4.458 ms x 100% = 98.8%

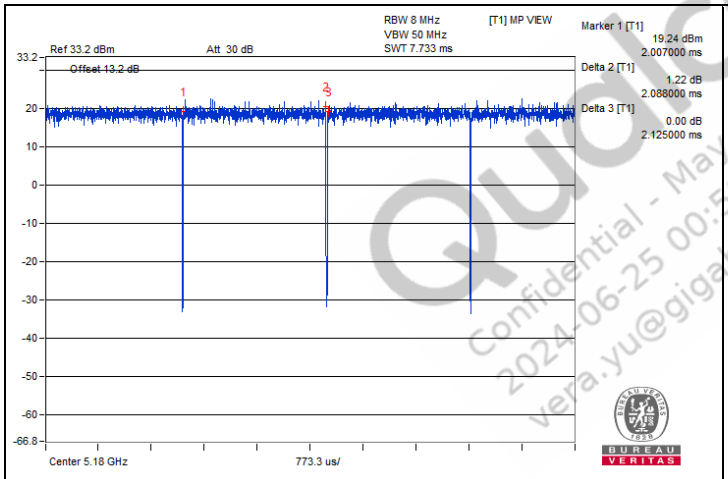


802.11a

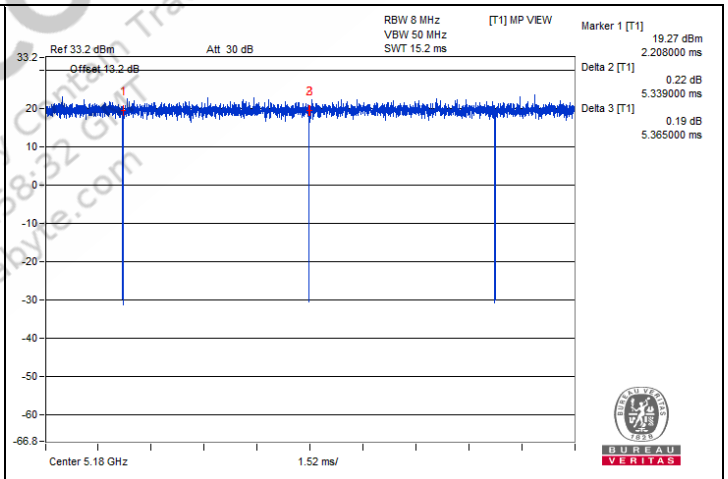

802.11be (EHT20)

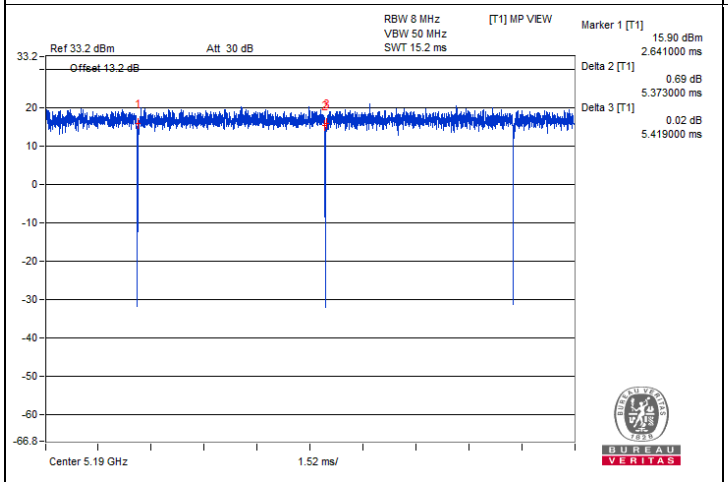


802.11be (EHT40)

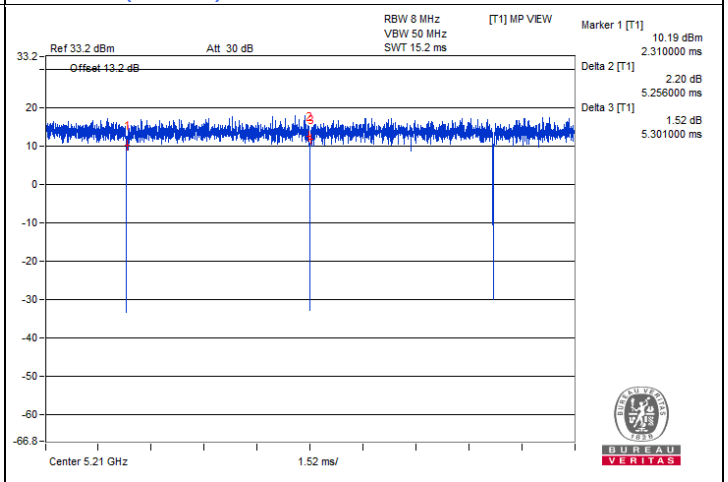


802.11be (EHT80)


QUALCOMM Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigalynk.com

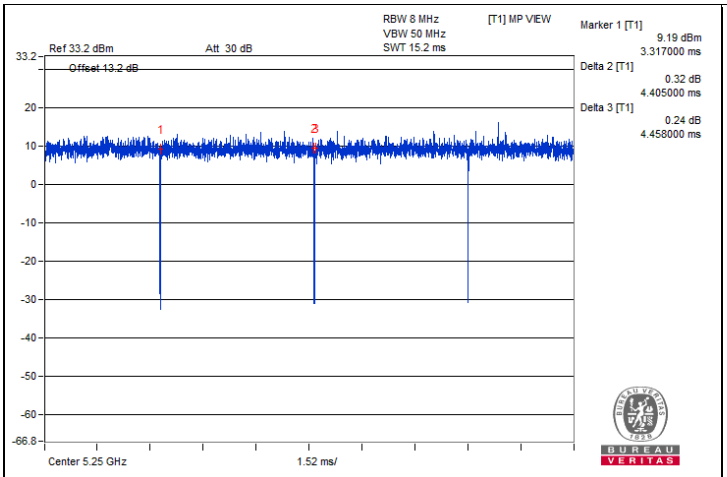


802.11be (EHT160)

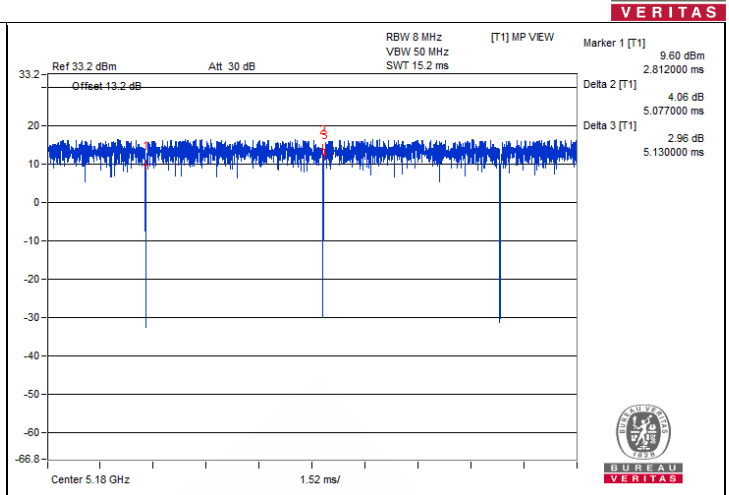


802.11be (EHT20) 26-tone RU

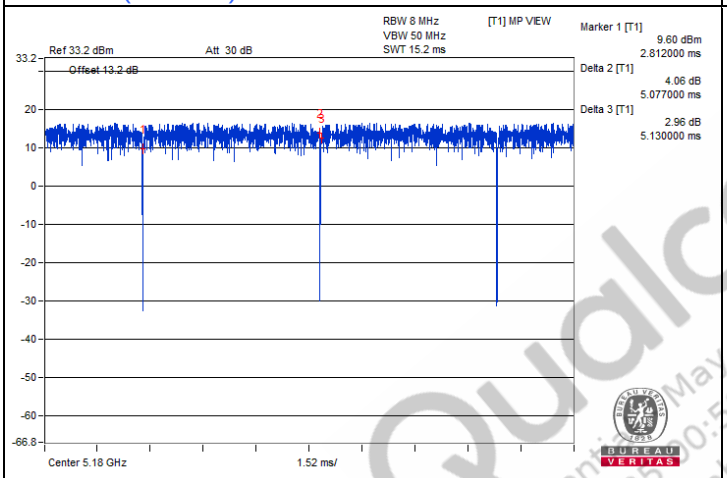


802.11be (EHT20) 52-tone RU

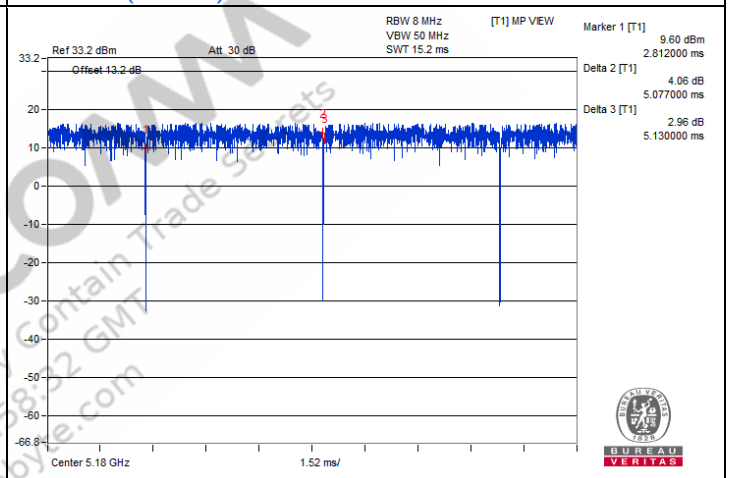

802.11be (EHT20) 106-tone RU

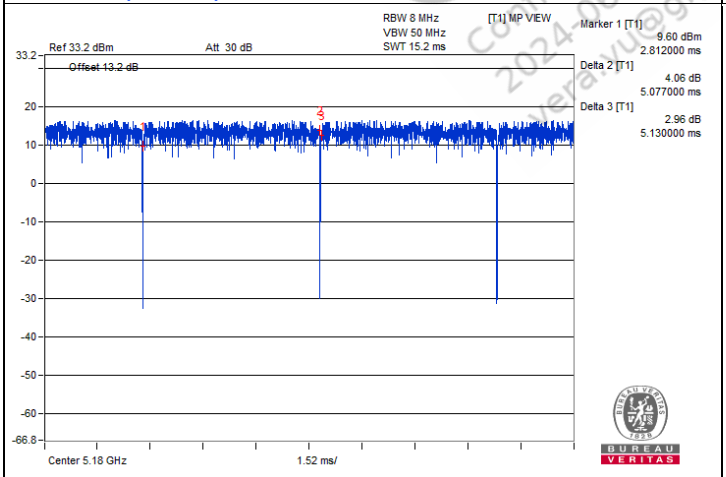


802.11be (EHT20) 242-tone RU

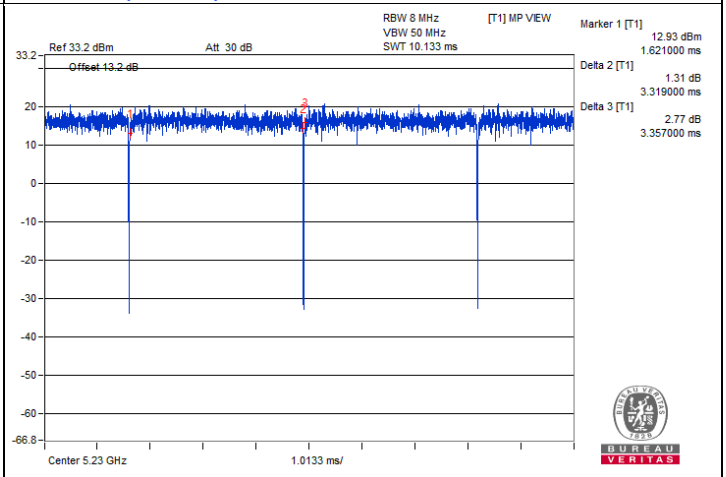


802.11be (EHT40) 484-tone RU


Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.xu@gigabyte.com

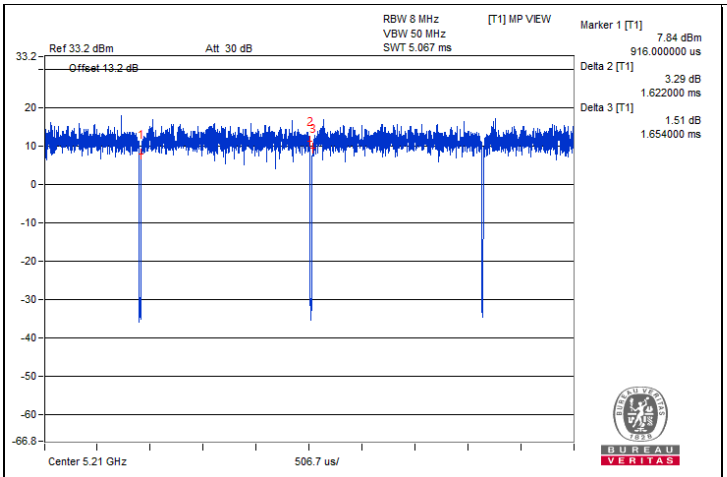


802.11be (EHT80) 996-tone RU

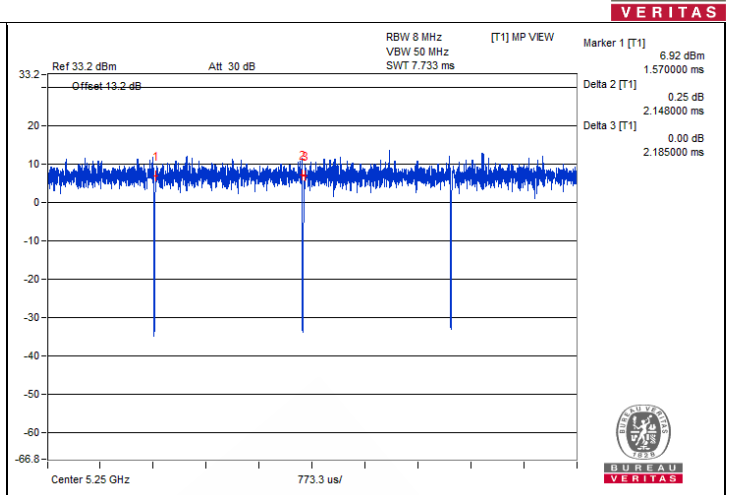


802.11be (EHT160) 2x996-tone RU

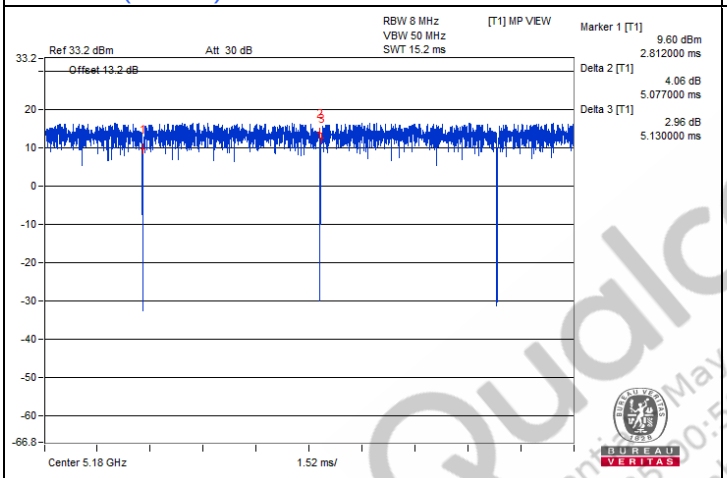


802.11be (EHT20) 52+26-tone MRU

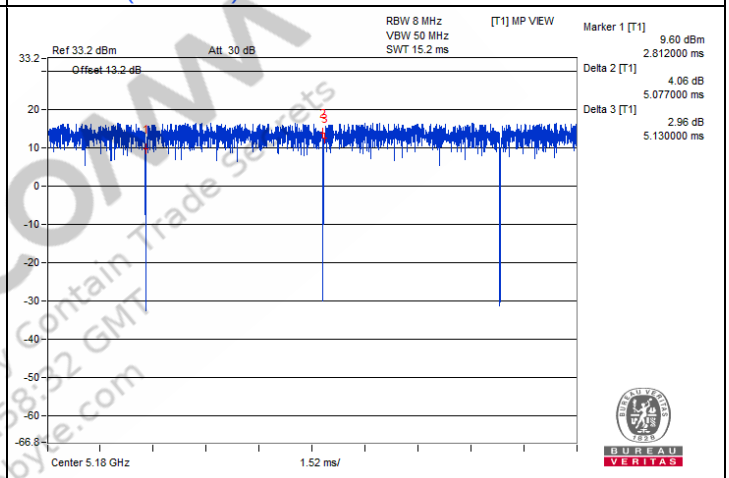

802.11be (EHT20) 106+26-tone MRU

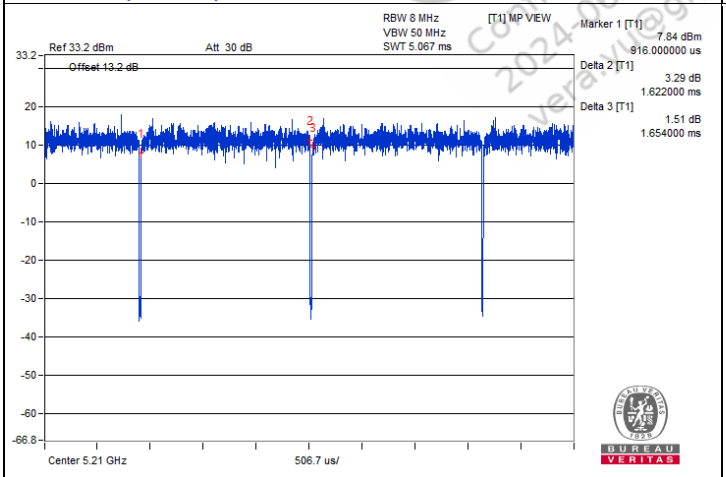


802.11be (EHT80) 484+242-tone MRU

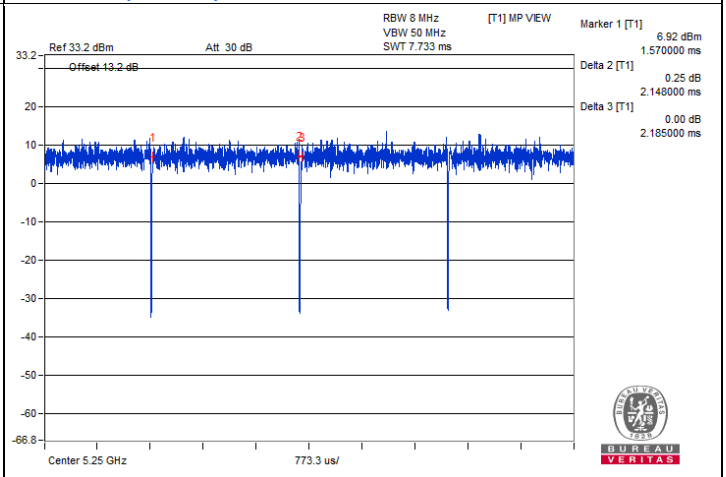


802.11be (EHT160) 996+484-tone MRU


Qualcomm
Confidential and May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.liu@gigabyte.com

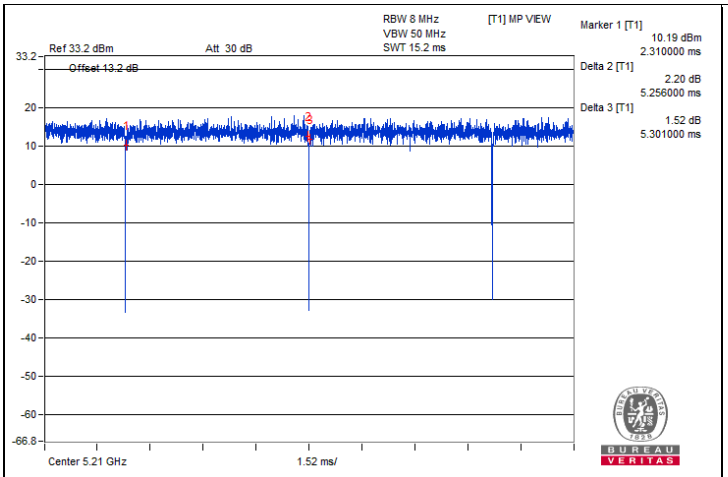

802.11be (EHT80) Punctured by 20 MHz

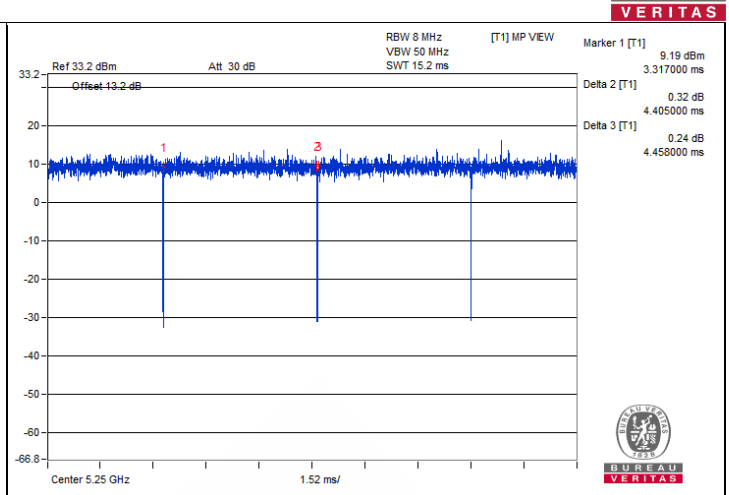

802.11be (EHT160) Punctured by 20 MHz

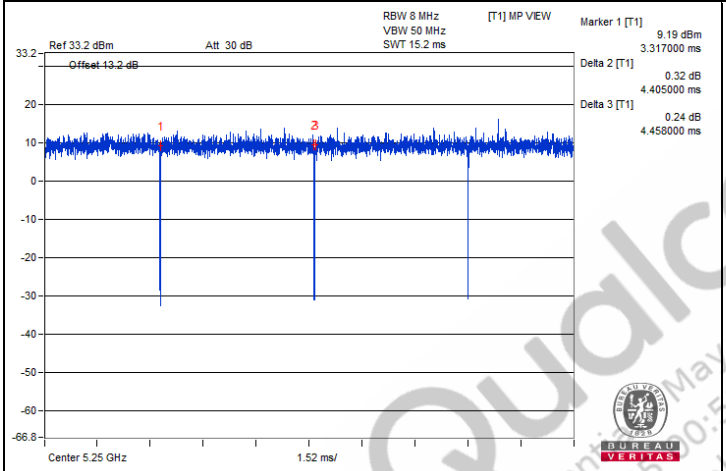

802.11be (EHT160) Punctured by 40 MHz


Qualcomm Confidential and May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yu@gigabyte.com

3.6 Test Program Used and Operation Descriptions


Controlling software (QRCT 4.0.00159.1) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

For AC Power Conducted Emission test

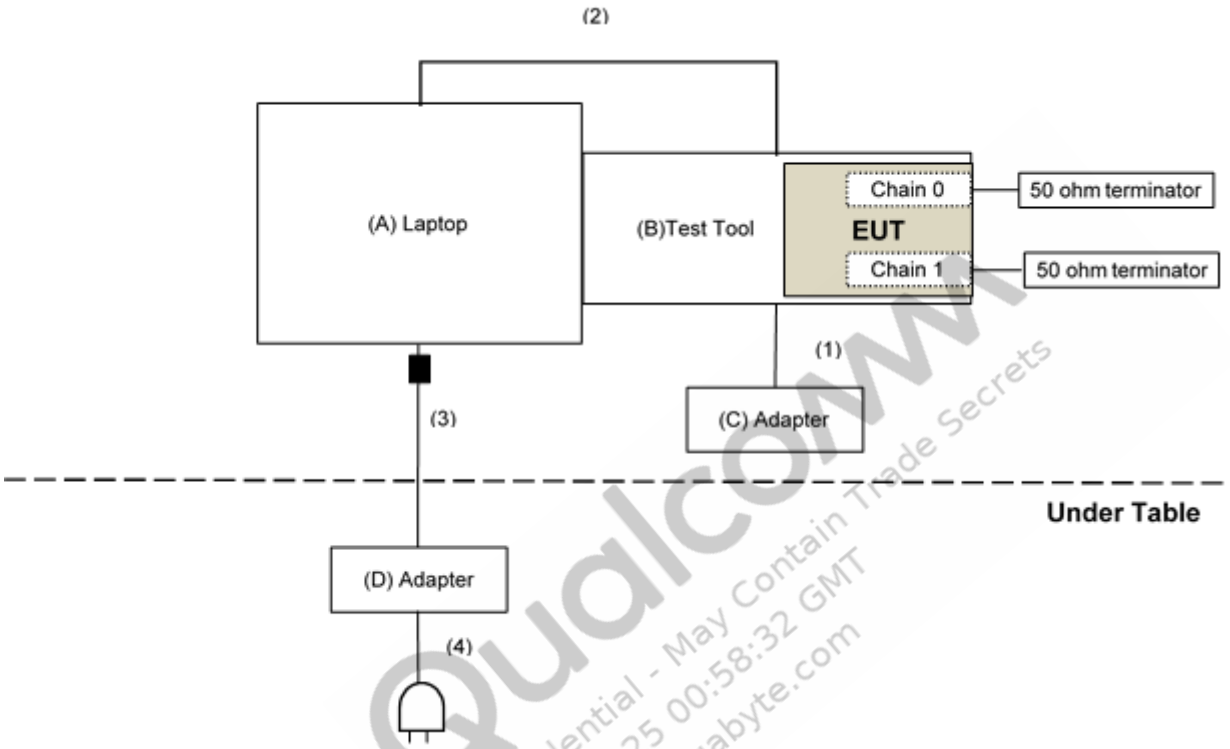


For Unwanted Emission test

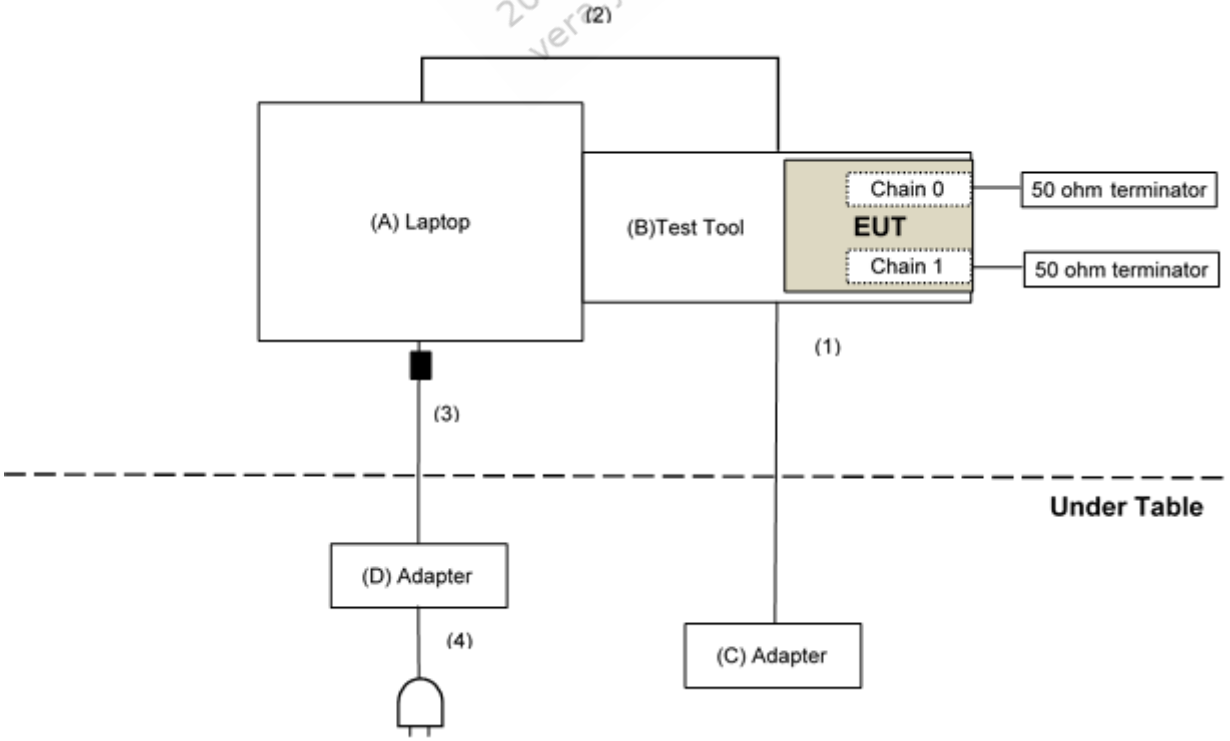


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

For Unwanted Emission Above 1GHz with Antenna Set 1 test

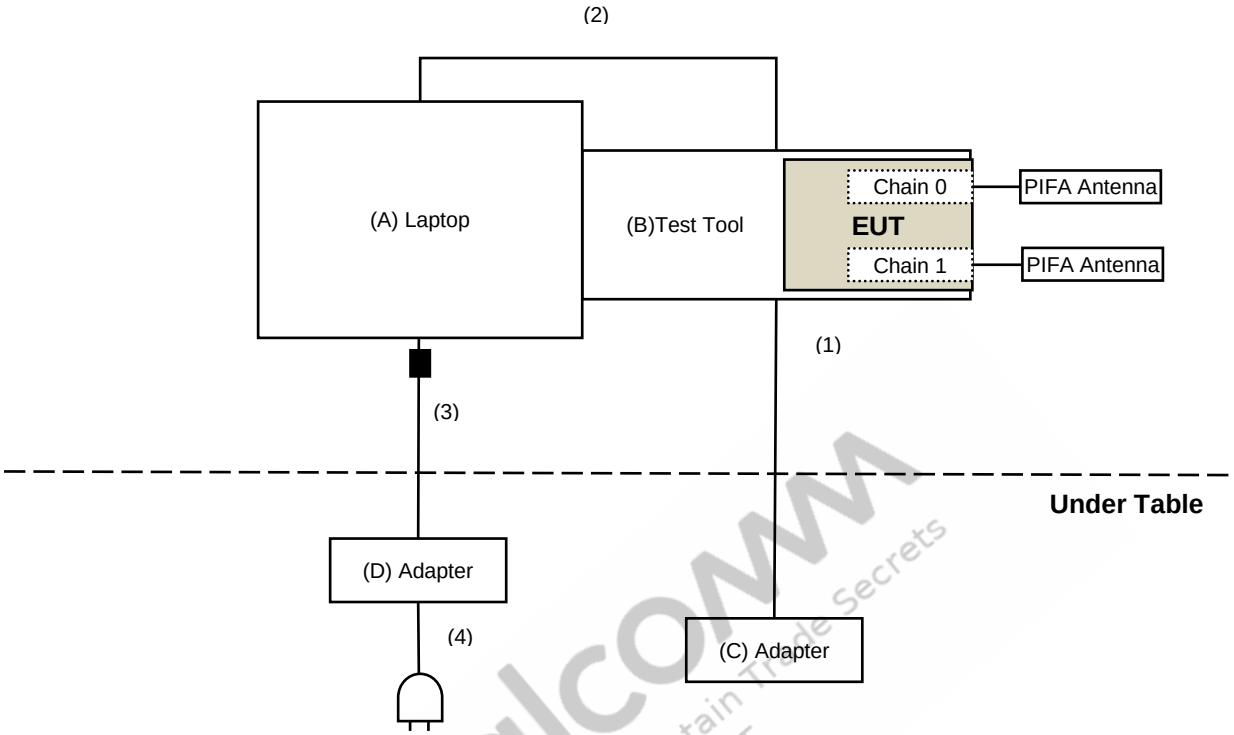

For Unwanted Emission Above 1GHz with Antenna Set 3 test

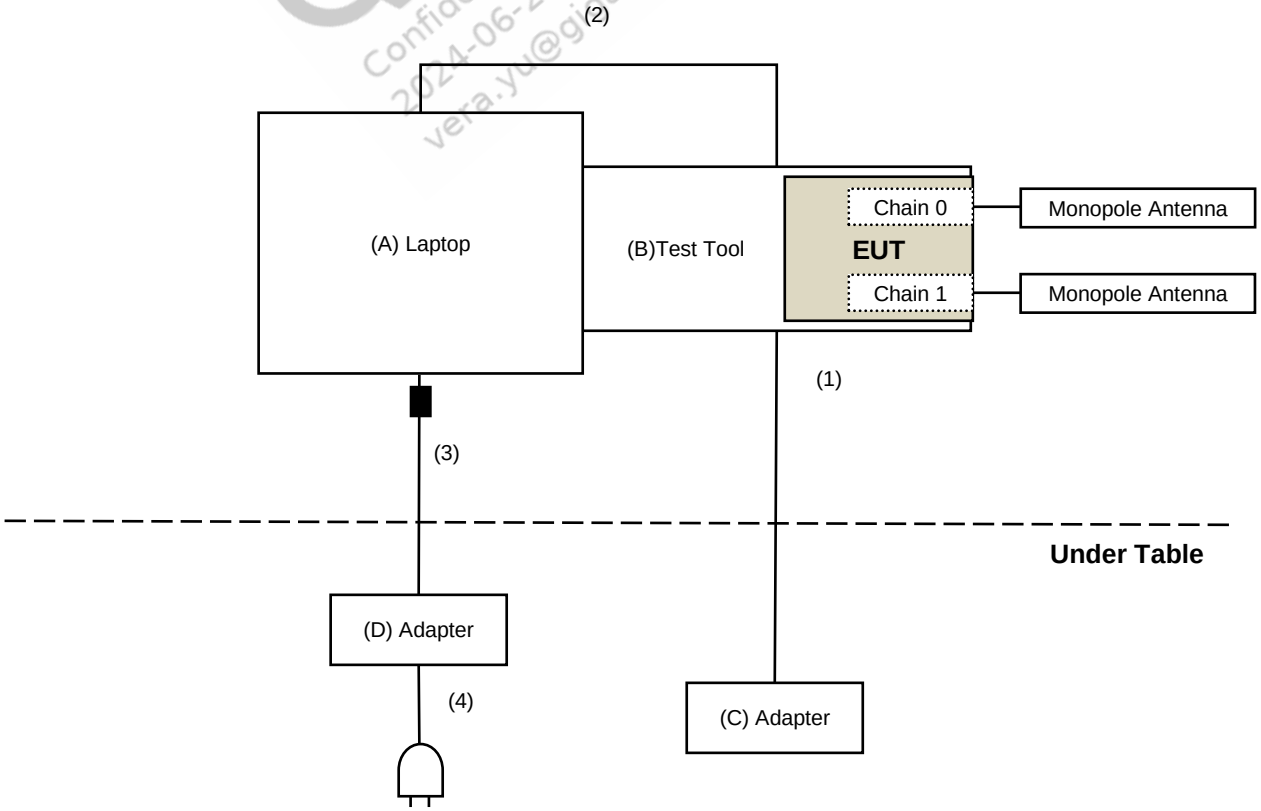

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:56:32 GMT
vera.yu@gigabyte.com

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Dell	E5420	6FGHKV1	N/A	Provided by Lab
B	Test Tool	Qualcomm	N/A	N/A	N/A	Supplied by applicant
C	Adapter	PHIHONG	PSAA12A-120L6	N/A	N/A	Supplied by applicant
D	Adapter	Dell	LLA65NS2-01	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC Cable	1	1.2	NO	0	Supplied by applicant
2	USB Cable	1	0.6	Yes	0	Provided by Lab
3	DC Cable	1	1.8	NO	1	Provided by Lab
4	AC Cable	1	1.5	NO	0	Provided by Lab

QualcoMM Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 26 dB Bandwidth

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2022/4/5	2023/4/4
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Spectrum Analyzer Keysight	N9020B	MY60112409	2022/3/11	2023/3/10

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/1/11

4.2 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Spectrum Analyzer Keysight	N9020B	MY60112409	2023/2/18	2024/2/17
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2023/3/27	2024/3/26
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/4/27

4.3 Power Spectral Density

Refer to section 4.1 to get information of the instruments.

4.4 6 dB Bandwidth

Refer to section 4.1 to get information of the instruments.

4.5 Occupied Bandwidth

Refer to section 4.1 to get information of the instruments.

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:36 GMT
vera.yu@gigahaus.com

4.6 Frequency Stability

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2022/4/5	2023/4/4
DC POWER SUPPLY Topward	6603D	795558	N/A	N/A
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A
Spectrum Analyzer Keysight	N9020B	MY60112409	2022/3/11	2023/3/10
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	2022/1/14	2023/1/13
True RMS Clamp Meter Fluke	325	31130711WS	2022/6/9	2023/6/8

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/1/11

4.7 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance	N/A	EMC-01	2022/9/27	2023/9/26
Fixed attenuator STI	STI02-2200-10	005	2022/8/24	2023/8/23
LISN R&S	ESH3-Z5	848773/004	2022/10/18	2023/10/17
RF Coaxial Cable JYEBO	5D-FB	COCCAB-001	2022/8/24	2023/8/23
Software BVADT	BVADT_Cond_V7.3.7.4	N/A	N/A	N/A
TEST RECEIVER R&S	ESCS 30	847124/029	2022/10/14	2023/10/13

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2023/2/20

QualcoMM Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

4.8 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bilog Antenna Schwarzbeck	VULB 9168	9168-0842	2022/10/24	2023/10/23
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-02	2022/12/28	2023/12/27
LOOP ANTENNA Electro-Metrics	EM-6879	264	2022/3/18	2023/3/17
Pre_Amplifier Agilent	8447D	2944A10636	2022/3/19	2023/3/18
Pre_Amplifier EMCI	EMC330N	980538	2022/4/25	2023/4/24
RF Coaxial Cable COMMATE/PEWC	8D	966-5-1	2022/4/25	2023/4/24
		966-5-2	2022/4/25	2023/4/24
		966-5-3	2022/4/25	2023/4/24
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-001	2022/12/19	2023/12/18
		LOOPCAB-002	2022/12/19	2023/12/18
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A
Spectrum Analyzer Keysight	N9020B	MY60112410	2022/3/13	2023/3/12
Test Receiver R&S	ESR3	102528	2023/2/10	2024/2/9

Notes:

1. The test was performed in 966 Chamber No. 5.
2. Tested Date: 2023/2/15

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

4.9 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-1819	2022/11/13	2023/11/12
	BBHA 9170	9170-739	2022/11/13	2023/11/12
Pre_Amplifier EMCI	EMC12630SE	980509	2022/4/25	2023/4/24
	EMC184045SE	980387	2022/12/28	2023/12/27
RF Cable-Frequency range: 1-40GHz EMCI	EMC102-KM-KM-1200	160924	2022/12/28	2023/12/27
RF Coaxial Cable EMCI	EMC-KM-KM-4000	200214	2022/3/8	2023/3/7
	EMC104-SM-SM-1500	180503	2022/4/25	2023/4/24
	EMC104-SM-SM-2000	180501	2022/4/25	2023/4/24
	EMC104-SM-SM-6000	180506	2022/4/25	2023/4/24
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A
Spectrum Analyzer Keysight	N9020B	MY60112410	2022/3/13	2023/3/12
Test Receiver R&S	ESR3	102528	2023/2/10	2024/2/9

Notes:

1. The test was performed in 966 Chamber No. 5.
2. Tested Date: 2023/2/17 ~ 2023/2/21

Qualcomm Confidential May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

5 Limits of Test Items

5.1 26 dB Bandwidth

The results are for reference only.

5.2 RF Output Power

Limits of Chile's power

Frequency Band	Limit
5150 ~ 5250 MHz (indoor only)	The maximum EIRP shall not exceed 1W (30dBm)
5250 ~ 5350 MHz (indoor, outdoor)	The maximum EIRP shall not exceed 1W (30dBm)
5470 ~ 5725 MHz (indoor, outdoor)	The maximum EIRP shall not exceed 1W (30dBm)
5725 ~ 5850 MHz (indoor, outdoor)	The maximum EIRP shall not exceed 1W (30dBm)

5.3 Power Spectral Density

Operation Band	EUT Category	Limit
U-NII-1	Outdoor Access Point	17 dBm/MHz
	Fixed point-to-point Access Point	
	Indoor Access Point	
	Mobile and Portable client device	11 dBm/MHz

Operation Band	Limit
U-NII-2A	11 dBm/MHz
U-NII-2C	11 dBm/MHz
U-NII-3	30 dBm/500 kHz

5.4 6 dB Bandwidth

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

5.5 Occupied Bandwidth

The results are for reference only.

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

5.6 Frequency Stability

The frequency of the carrier signal shall be maintained within band of operation.

5.7 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.8 Unwanted Emissions below 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:19:32 GMT vera.yu@gigabyte.com

5.9 Unwanted Emissions above 1 GHz

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To	Limit	
789033 D02 General UNII Test Procedure New Rules v02r01	Field Strength at 3 m	
	PK: 74 (dBµV/m)	AV: 54 (dBµV/m)

For transmitters operating in the 5.15-5.25 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(1)	PK: -27 (dBm/MHz)	PK: 68.2 (dBµV/m)

For transmitters operating in the 5.25-5.35 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(2)	PK: -27 (dBm/MHz)	PK: 68.2 (dBµV/m)

For transmitters operating in the 5.47-5.725 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(3)	PK: -27 (dBm/MHz)	PK: 68.2 (dBµV/m)

For transmitters operating in the 5.725-5.850 GHz band:

Applicable To	EIRP Limit	Equivalent Field Strength at 3 m
15.407(b)(4)(i)	PK: -27 (dBm/MHz) *1 PK: 10 (dBm/MHz) *2 PK: 15.6 (dBm/MHz) *3 PK: 27 (dBm/MHz) *4	PK: 68.2 (dBµV/m) *1 PK: 105.2 (dBµV/m) *2 PK: 110.8 (dBµV/m) *3 PK: 122.2 (dBµV/m) *4
*1 beyond 75 MHz or more above of the band edge. *2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. *3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. *4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.		

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:


$$E = \frac{1000000\sqrt{30P}}{3}$$ µV/m, where P is the eirp (Watts).

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:19:32 GMT

6 Test Arrangements

6.1 26 dB Bandwidth

6.1.1 Test Setup




6.1.2 Test Procedure

a. Set RBW = approximately 1% of the emission bandwidth.
b. Set the VBW > RBW.
c. Detector = Peak.
d. Trace mode = max hold.
e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

6.2 RF Output Power

6.2.1 Test Setup



6.2.2 Test Procedure


a. Set the RBW ≥ 1% to 5% of the emission bandwidth
b. Set the VBW ≥ 3 x RBW
c. Set the span ≥ [1.5 × Emission bandwidth]
d. Detector = peak.
e. Sweep time = auto couple.
f. Trace mode = max hold.
g. Allow trace to fully stabilize.
h. Record the max value

EIRP = Conducted power + Antenna Gain

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

6.3 Power Spectral Density

6.3.1 Test Setup



6.3.2 Test Procedure

For specified measurement bandwidth 1 MHz:
Method SA-1


a. Set span to encompass the entire emission bandwidth (EBW) of the signal.
b. Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
c. Sweep points ≥ [2 × span / RBW]. (This gives bin-to-bin spacing ≤ RBW / 2, so that narrowband signals are not lost between frequency bins.)
d. Sweep time = auto, trigger set to “free run”.
e. Trace average at least 100 traces in power averaging mode.
f. Record the max value

For specified measurement bandwidth 500 kHz:
Method SA-1

a. Set span to encompass the entire emission bandwidth (EBW) of the signal.
b. Set RBW = 300 kHz, Set VBW ≥ 1 MHz, Detector = RMS
c. Scale the observed power level to an equivalent value in 500 kHz by adjusting (increasing) the measured power by a bandwidth correction factor (BWCF) where BWCF = 10log(500 kHz/300 kHz)
d. Sweep points ≥ [2 × span / RBW]. (This gives bin-to-bin spacing ≤ RBW / 2, so that narrowband signals are not lost between frequency bins.)
e. Sweep time = auto, trigger set to “free run”.
f. Trace average at least 100 traces in power averaging mode.
g. Record the max value

6.4 6 dB Bandwidth

6.4.1 Test Setup




6.4.2 Test Procedure

a. Set resolution bandwidth (RBW) = 100 kHz.
b. Set the video bandwidth (VBW) ≥ 3 x RBW, Detector = Peak.
c. Trace mode = max hold.
d. Sweep = auto couple.
e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Qualcomm Confidential and Contain Trade Secrets
2024-06-25 07:58:52 GMT
vera.ju@gig.tv.com

6.5 Occupied Bandwidth

6.5.1 Test Setup




6.5.2 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to Sampling. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

6.6 Frequency Stability

6.6.1 Test Setup

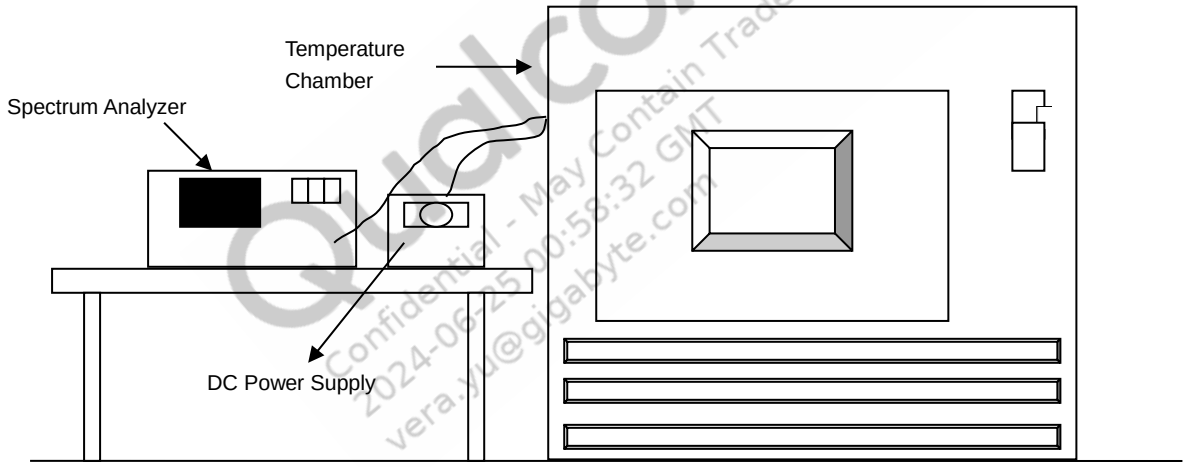


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

6.6.2 Test Procedure

a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
b. Turn the EUT on and couple its output to a spectrum analyzer.
c. Turn the EUT off and set the chamber to the highest temperature specified.
d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
e. Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

6.7 AC Power Conducted Emissions

6.7.1 Test Setup

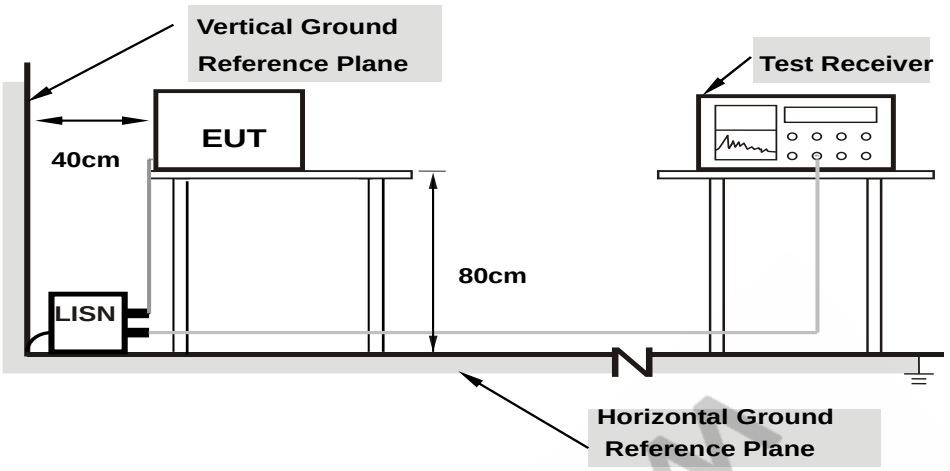

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

a. The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.

b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.


Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.

Qualcomm Confidential and Contain Trade Secrets
2024-06-25 00:32:32 GMT
vrevu@qualcomm.com

6.8 Unwanted Emissions below 1 GHz


6.8.1 Test Setup

For Conducted Configuration:




For Radiated Configuration:

For Radiated emission below 30 MHz

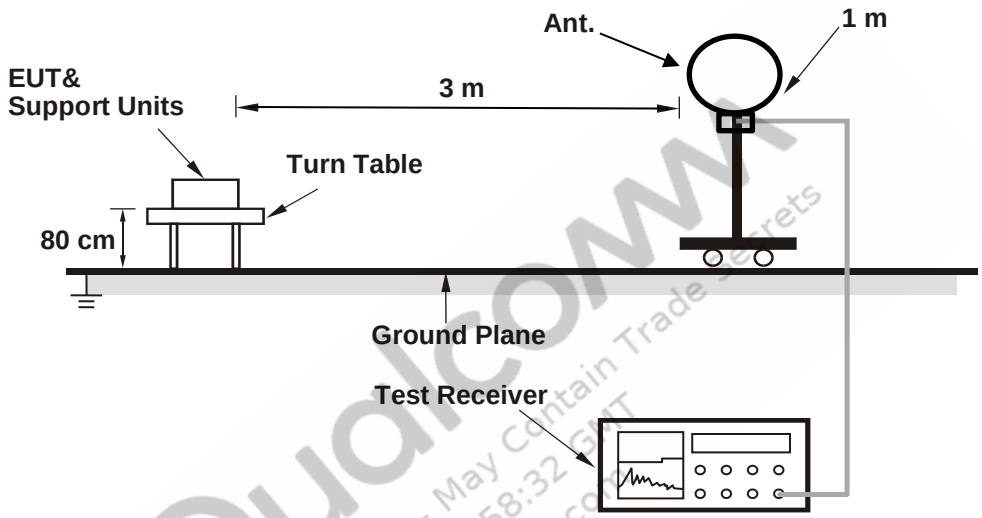

For Radiated emission above 30 MHz

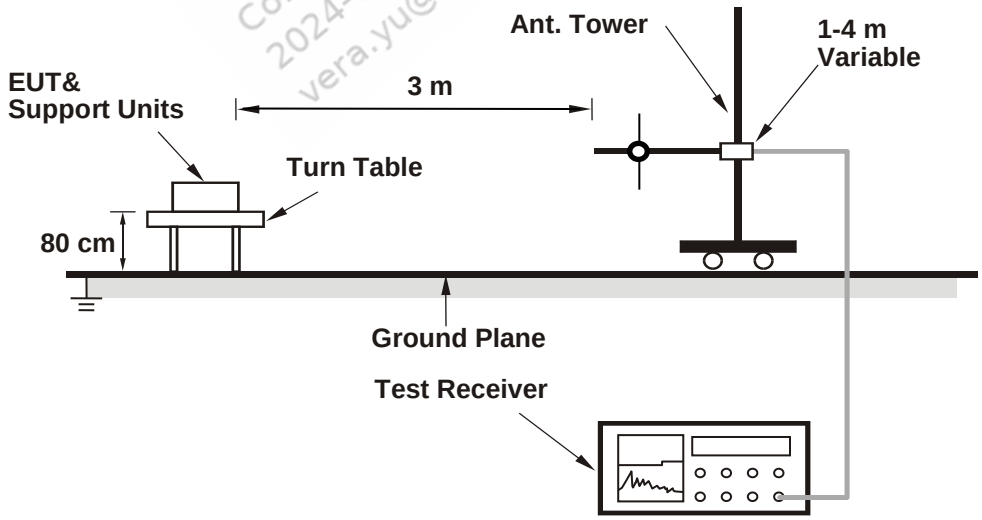

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

6.8.2 Test Procedure

Following FCC KDB 789033 D02 General UNII Test Procedures:

Radiated versus Conducted Measurements.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

a. Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.

b. Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.

c. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.

d. EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)

e. For all of Radiation emission test

For Radiated emission below 30 MHz

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.


Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.


6.9 Unwanted Emissions above 1 GHz

6.9.1 Test Setup

For Conducted Configuration:



For Radiated Configuration:

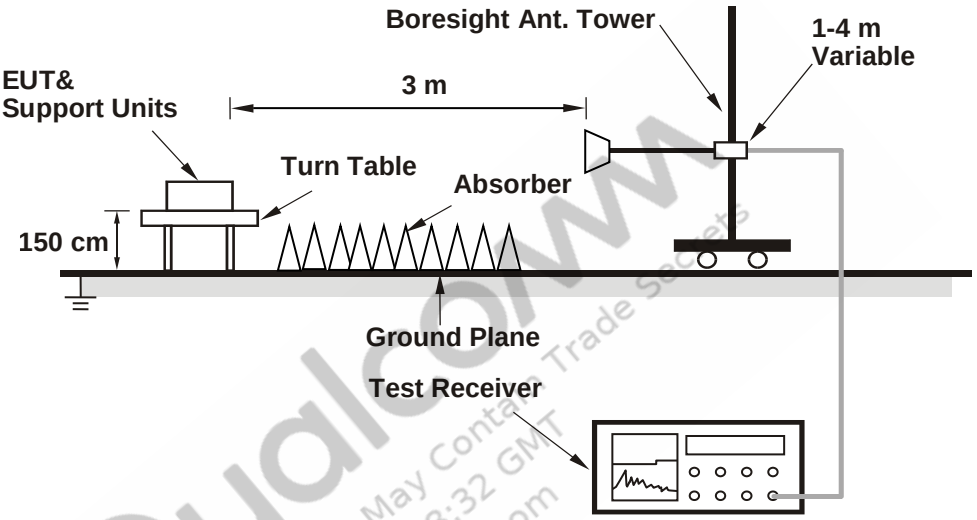

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

6.9.2 Test Procedure

Following FCC KDB 789033 D02 General UNII Test Procedures:

Radiated versus Conducted Measurements.

The unwanted emission limits in both the restricted and non-restricted bands are based on antenna-port conducted measurements in conjunction with cabinet emissions tests are permitted to demonstrate compliance.

The following steps was performed:

a. Cabinet emissions measurements. Radiated measurement was performed to ensure that cabinet emissions are below the emission limits. For the cabinet-emission measurements the antenna was replaced by a termination matching the nominal impedance of the antenna.

b. Conducted tests was performed using equipment that matches the nominal impedance of the antenna assembly used with the EUT.

c. EIRP calculation. A value representative of an upper bound on out-of-band antenna gain (in dBi) shall be added to the measured antenna-port conducted emission power to compute EIRP within the specified measurement bandwidth. (For emissions in the restricted bands, additional calculations are required to convert EIRP to field strength at the specified distance.) The upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands or 2 dBi, whichever is greater.

d. EIRP adjustments for multiple outputs. (Follow the procedures specified in FCC KDB Publication 662911)

e. For all of Radiation emission test

For Radiated emission above 1 GHz

a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

1. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
2. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is ≥ 1/T (Duty cycle < 98%) or 10 Hz (Duty cycle ≥ 98%) for Average detection (AV) at frequency above 1 GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 26 dB Bandwidth

Mode A

Input Power:	3.3 Vdc	Environmental Conditions:	24°C, 65% RH	Tested By:	Eric Peng

802.11a

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	22.32	22.46
60	5300	22.30	22.06
64	5320	22.25	22.03
100	5500	22.20	22.39
116	5580	22.17	21.90
140	5700	22.30	21.94
144 (U-NII-2C)	5720	15.88	16.12
144 (U-NII-3)	5720	6.11	6.16

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
52	5260	22.32	24.48	>	24
60	5300	22.06	24.43	>	24
64	5320	22.03	24.43	>	24
100	5500	22.20	24.46	>	24
116	5580	21.90	24.4	>	24
140	5700	21.94	24.41	>	24
144 (U-NII-2C)	5720	15.88	23	<	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

Qualcomm Confidential - May Contain Trade Secrets 2022-06-25 00:52:22 GMT vernyu@gigabyte.com

802.11be (EHT20)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	22.33	22.14
60	5300	22.66	22.12
64	5320	22.41	21.95
100	5500	22.30	21.82
116	5580	22.54	21.94
140	5700	22.49	22.41
144 (U-NII-2C)	5720	16.46	15.61
144 (U-NII-3)	5720	5.88	5.37

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
52	5260	22.14	24.45	>	24
60	5300	22.12	24.44	>	24
64	5320	21.95	24.41	>	24
100	5500	21.82	24.38	>	24
116	5580	21.94	24.41	>	24
140	5700	22.41	24.5	>	24
144 (U-NII-2C)	5720	15.61	22.93	<	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

Qualcomm Confidential - May contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT40)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
54	5270	43.71	45.05
62	5310	45.03	44.18
102	5510	44.06	44.36
110	5550	44.20	44.20
134	5670	43.59	44.15
142 (U-NII-2C)	5710	36.95	37.26
142 (U-NII-3)	5710	6.91	6.64

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
54	5270	43.71	27.4	>	24
62	5310	44.18	27.45	>	24
102	5510	44.06	27.44	>	24
110	5550	44.20	27.45	>	24
134	5670	43.59	27.39	>	24
142 (U-NII-2C)	5710	36.95	26.67	>	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11be (EHT80)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
58	5290	84.24	83.79
106	5530	84.90	83.83
122	5610	84.61	83.59
138 (U-NII-2C)	5690	76.65	76.21
138 (U-NII-3)	5690	7.07	6.39

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
58	5290	83.79	30.23	>	24
106	5530	83.83	30.23	>	24
122	5610	83.59	30.22	>	24
138 (U-NII-2C)	5690	76.21	29.82	>	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

Qualcomm Confidential - May contain Trade Secrets 2024-06-25 01:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT160)

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-1)	5250	86.04	87.03
50 (U-NII-2A)	5250	86.31	87.47
114	5570	174.44	173.33

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
50 (U-NII-2A)	5250	86.31	30.36 > 24
114	5570	173.33	33.38 > 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11be (EHT20) 26-tone RU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	20.33	20.12
60	5300	20.17	20.13
64	5320	20.53	20.28
100	5500	20.21	20.12
116	5580	20.28	20.18
140	5700	20.56	20.30
144 (U-NII-2C)	5720	14.42	14.03
144 (U-NII-3)	5720	6.09	6.01

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
52	5260	20.12	24.03 > 24
60	5300	20.13	24.03 > 24
64	5320	20.28	24.07 > 24
100	5500	20.12	24.03 > 24
116	5580	20.18	24.04 > 24
140	5700	20.30	24.07 > 24
144 (U-NII-2C)	5720	14.03	22.47 < 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

QualcOMM Confidential - May Contain Trade Secrets 2024-06-25 08:38:32 GMT vera.yu@gigabyte.com

802.11be (EHT20) 52-tone RU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	20.18	20.42
60	5300	20.35	20.69
64	5320	20.75	20.20
100	5500	20.31	20.69
116	5580	20.32	20.63
140	5700	20.88	20.37
144 (U-NII-2C)	5720	14.76	14.34
144 (U-NII-3)	5720	6.20	5.96

Determined Output Power Limit					
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)		
52	5260	20.18	24.04	>	24
60	5300	20.35	24.08	>	24
64	5320	20.20	24.05	>	24
100	5500	20.31	24.07	>	24
116	5580	20.32	24.07	>	24
140	5700	20.37	24.08	>	24
144 (U-NII-2C)	5720	14.34	22.56	<	24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

Qualcomm Confidential - May contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT20) 106-tone RU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
52	5260	20.20	20.73
60	5300	20.19	20.70
64	5320	20.92	20.61
100	5500	20.18	20.59
116	5580	20.13	20.40
140	5700	20.85	20.23
144 (U-NII-2C)	5720	14.93	14.29
144 (U-NII-3)	5720	6.10	5.89

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
52	5260	20.20	24.05 > 24
60	5300	20.19	24.05 > 24
64	5320	20.61	24.14 > 24
100	5500	20.18	24.04 > 24
116	5580	20.13	24.03 > 24
140	5700	20.23	24.05 > 24
144 (U-NII-2C)	5720	14.29	22.55 < 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11be (EHT80) 484+242-tone MRU

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
138 (U-NII-2C)	5690	76.18	29.81 > 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11be (EHT160) 996+484-tone MRU

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-1)	5250	87.46	87.43

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

Qualcomm Confidential - May contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT80) Punctured by 20 MHz

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
138 (U-NII-2C)	5690	77.93	76.70
138 (U-NII-3)	5690	7.08	6.39

Determined Output Power Limit			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Power Limit (dBm)
138 (U-NII-2C)	5690	76.70	29.84 > 24

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

802.11be (EHT160) Punctured by 20 MHz

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-1)	5250	87.41	86.10

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.


802.11be (EHT160) Punctured by 40 MHz

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-1)	5250	85.85	87.43


Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth.

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:18:32 GMT vera.yue@gigabyte.com


Spectrum Plot of Minimum Value

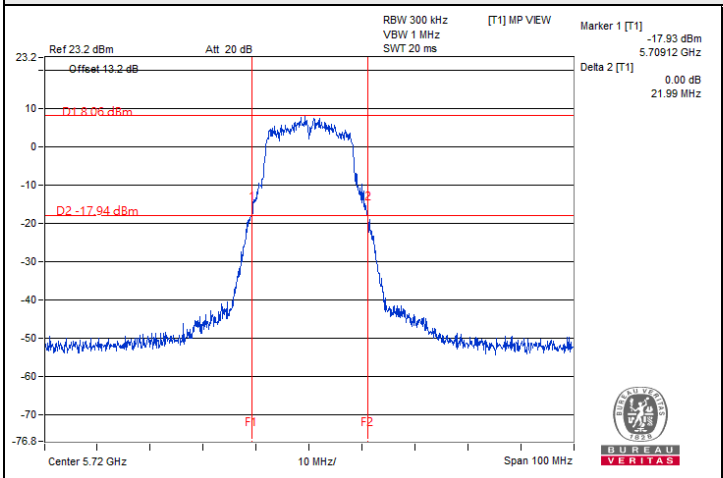


802.11a / Chain 0 : CH 144 (U-NII-3)

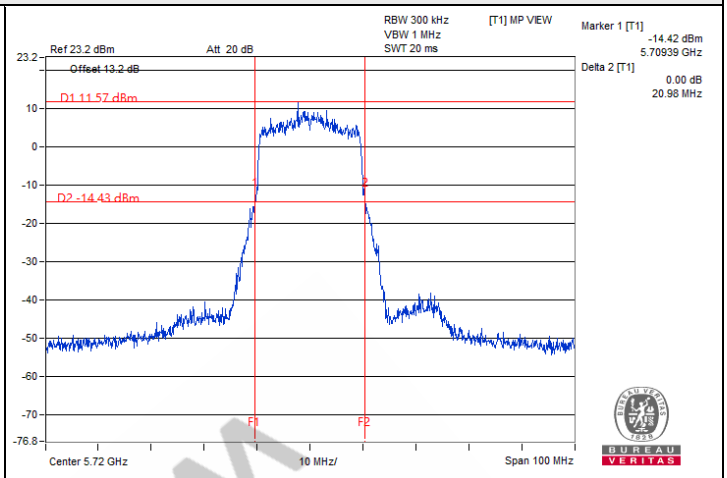


802.11be (EHT20) / Chain 1 : CH 144 (U-NII-3)

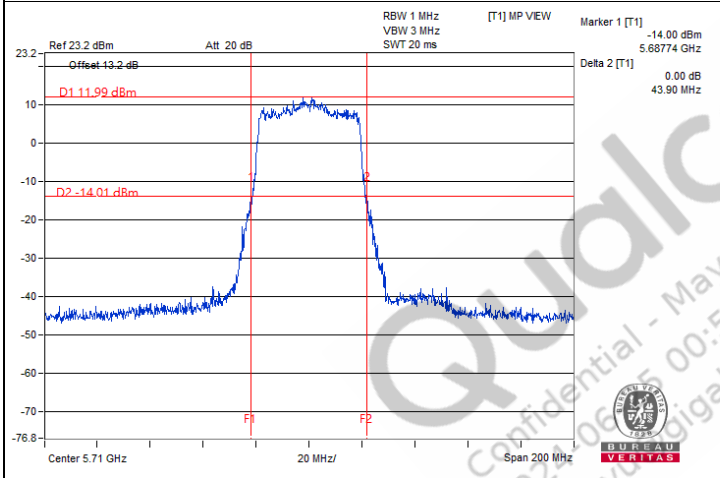


802.11be (EHT40) / Chain 1 : CH 142 (U-NII-3)

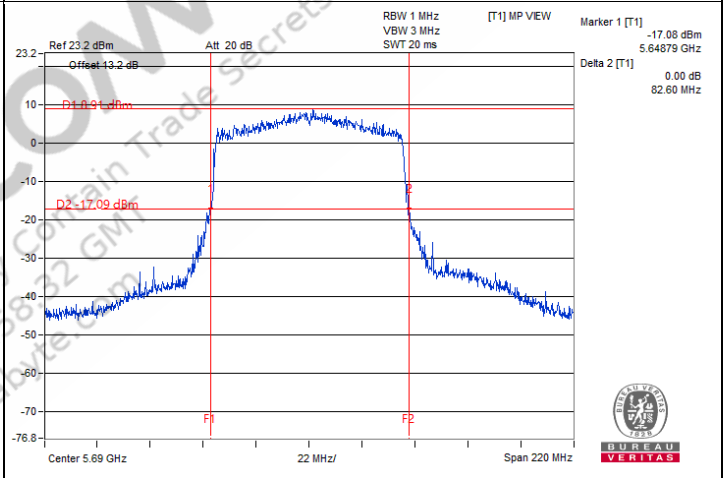

802.11be (EHT80) / Chain 1 : CH 138 (U-NII-3)

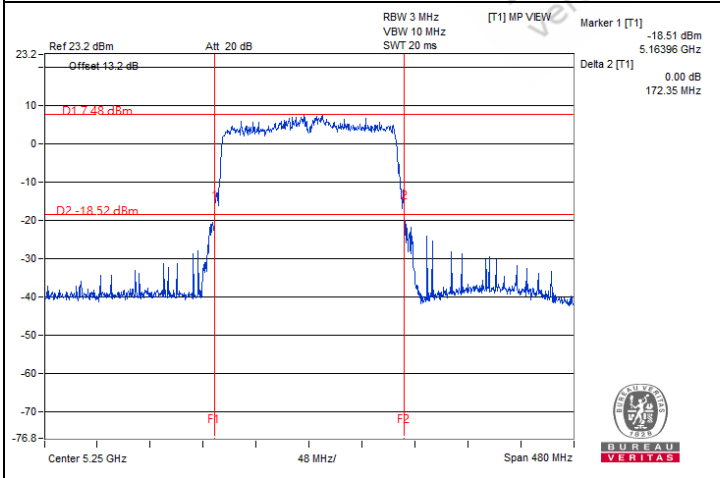


802.11be (EHT160) / Chain 0 : CH 50 (U-NII-1)

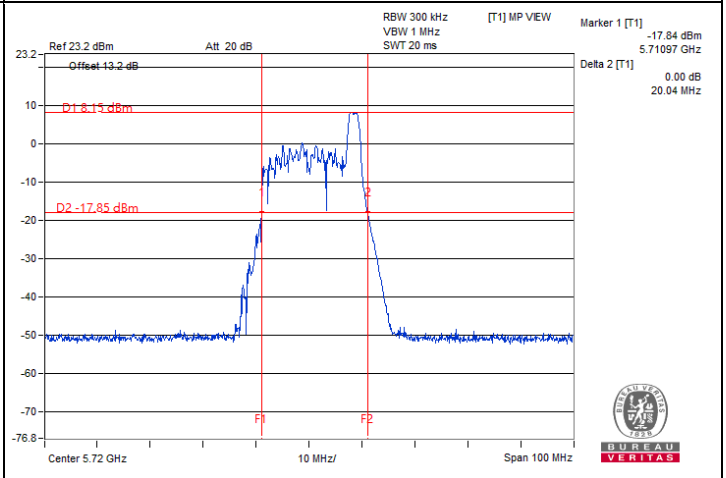


802.11be (EHT20) 26-tone RU / Chain 1 : CH 144@8 (U-NII-3)

Qualcomm
Confidential - May Contain Trade Secrets
2022-06-15 00:58:32 GMT
vera.yu@bureauveritas.com


Spectrum Plot of Minimum Value

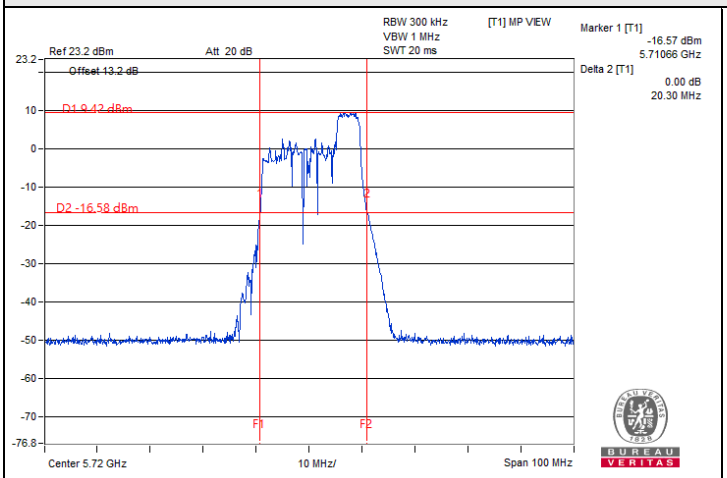


802.11be (EHT20) 52-tone RU / Chain 1 : CH 144@40 (U-NII-3)

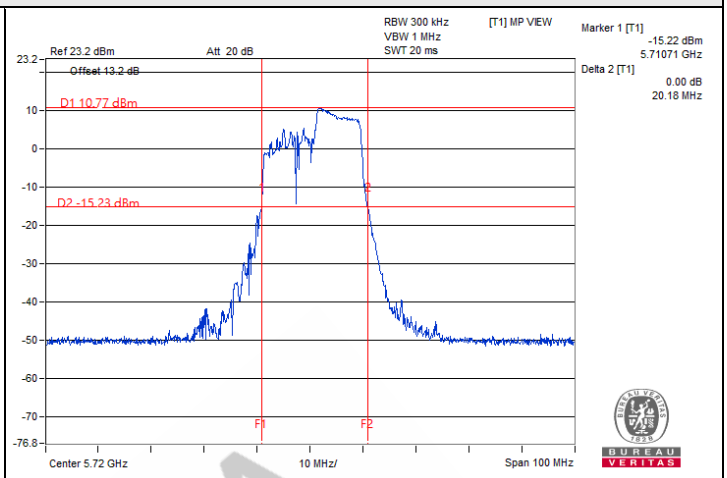


802.11be (EHT20) 106-tone RU / Chain 1 : CH 144@54 (U-NII-3)

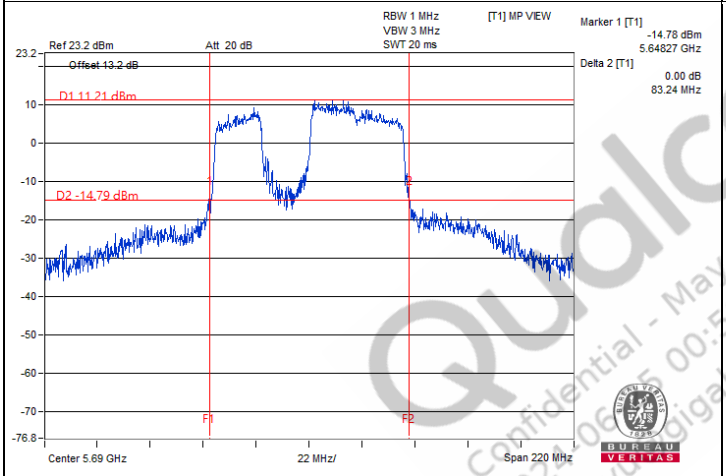


802.11be (EHT80) 484+242-tone MRU / Chain 1 : CH 138@2 (U-NII-3)

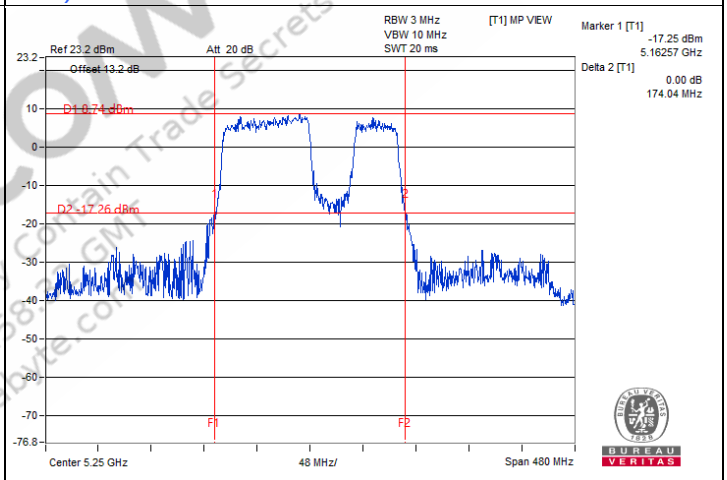

802.11be (EHT160) 996+484-tone MRU / Chain 1 : CH 50@2 (U-NII-1)

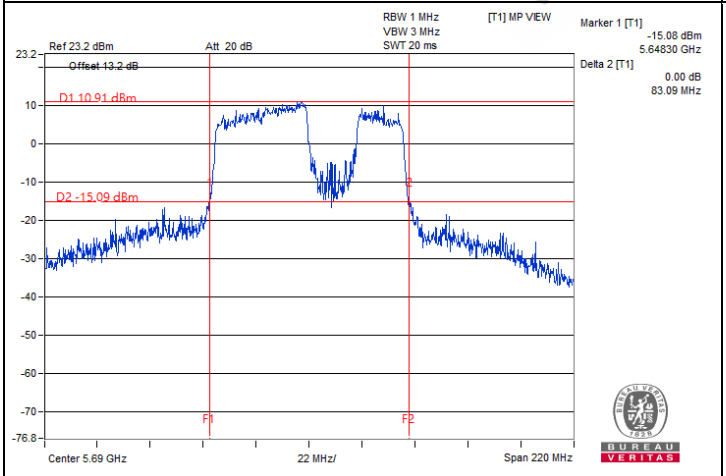


802.11be (EHT80) Punctured by 20 MHz / Chain 1 : CH 138@2 (U-NII-3)

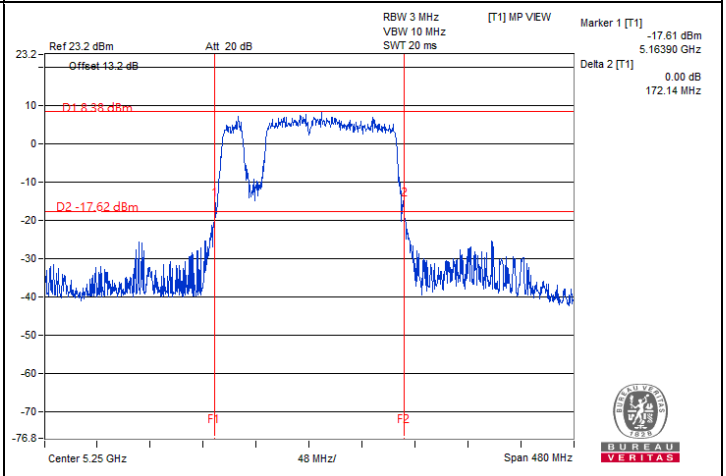

802.11be (EHT160) Punctured by 20 MHz / Chain 1 : CH 50@4 (U-NII-1)

Qualcomm
Confidential - May Contain Trade Secrets
2022-06-15 00:58:32 GMT
version gigabyte.com

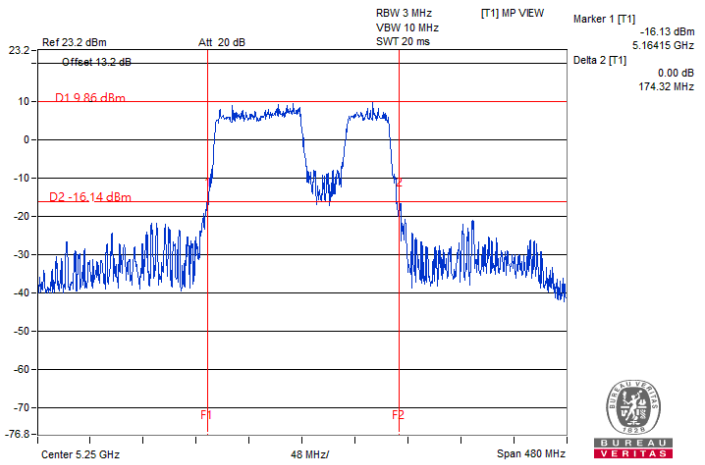Spectrum Plot of Minimum Value	
 802.11be (EHT160) Punctured by 40 MHz / Chain 0 : CH 50@10 (U-NII-1)	

Notes:

1. For U-NII-2C straddle channel = 5725 MHz - Marker 1
2. For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

7.2 RF Output Power

Mode A

Composite Antenna Gain Type	Frequency Range	Chain0 (dBi)	Chain1 (dBi)	Directional Gain (dBi)	Certification Power
Correlated	5150 ~ 5250 MHz:	3.35	3.35	3.35	S.A. Peak Power
	5250 ~ 5350 MHz:	3.42	3.35	3.42	
	5470 ~ 5725 MHz:	4.81	3.35	4.81	
	5725 ~ 5850 MHz:	4.72	3.35	4.72	

Mode	Channel	Frequency (MHz)	Conducted (dBm)			EIRP			Pass / Fail
			Chain0	Chain1	Total Power				
			Peak	Peak	Peak	Value (dBm)	Value (mW)	Limit (mW)	
802.11a	36	5180	23.32	23.39	26.37	29.72	937.562	1000	Pass
	40	5200	23.45	23.67	26.57	29.92	981.748	1000	Pass
	48	5240	23.17	23.60	26.40	29.75	944.061	1000	Pass
	52	5260	22.54	23.28	25.94	29.36	862.979	1000	Pass
	60	5300	22.53	23.19	25.88	29.3	851.138	1000	Pass
	64	5320	22.75	23.43	26.11	29.53	897.429	1000	Pass
	100	5500	21.05	21.38	24.23	29.04	801.678	1000	Pass
	116	5580	21.41	21.81	24.62	29.43	877.001	1000	Pass
	140	5700	21.12	21.69	24.42	29.23	837.529	1000	Pass
	144	5720	21.09	21.67	24.40	29.21	833.681	1000	Pass
	149	5745	21.41	22.04	24.75	29.47	885.116	1000	Pass
	157	5785	21.41	22.07	24.76	29.48	887.156	1000	Pass
	165	5825	21.36	22.16	24.79	29.51	893.305	1000	Pass
802.11be (EHT20)	36	5180	23.05	23.45	26.26	29.61	914.113	1000	Pass
	40	5200	23.21	23.79	26.52	29.87	970.51	1000	Pass
	48	5240	23.03	23.64	26.36	29.71	935.406	1000	Pass
	52	5260	22.48	23.57	26.07	29.49	889.201	1000	Pass
	60	5300	22.61	23.12	25.88	29.3	851.138	1000	Pass
	64	5320	22.72	23.59	26.19	29.61	914.113	1000	Pass
	100	5500	21.48	21.96	24.74	29.55	901.571	1000	Pass
	116	5580	21.69	22.32	25.03	29.84	963.829	1000	Pass
	140	5700	21.42	22.27	24.88	29.69	931.108	1000	Pass
	144	5720	21.37	22.42	24.94	29.75	944.061	1000	Pass
	149	5745	21.27	22.22	24.78	29.5	891.251	1000	Pass
	157	5785	21.21	22.23	24.76	29.48	887.156	1000	Pass
	165	5825	21.20	22.03	24.65	29.37	864.968	1000	Pass

Qualcomm Confidential - May Contain Trade Secrets
2024-07-25 00:58:53 GMT
vera.yu@gigabyte.com

Composite Antenna Gain Type	Frequency Range	Chain0 (dBi)	Chain1 (dBi)	Directional Gain (dBi)	Certification Power
Correlated	5150 ~ 5250 MHz:	3.35	3.35	3.35	S.A. Peak Power
	5250 ~ 5350 MHz:	3.42	3.35	3.42	
	5470 ~ 5725 MHz:	4.81	3.35	4.81	
	5725 ~ 5850 MHz:	4.72	3.35	4.72	

Mode	Channel	Frequency (MHz)	Conducted (dBm)			EIRP			Pass / Fail
			Chain0	Chain1	Total Power				
			Peak	Peak	Peak	Value (dBm)	Value (mW)	Limit (mW)	
802.11be (EHT40)	38	5190	22.74	23.13	25.95	29.3	851.138	1000	Pass
	46	5230	23.09	23.73	26.43	29.78	950.605	1000	Pass
	54	5270	23.15	23.76	26.48	29.9	977.237	1000	Pass
	62	5310	23.07	23.61	26.36	29.78	950.605	1000	Pass
	102	5510	21.29	21.66	24.49	29.3	851.138	1000	Pass
	110	5550	21.45	21.90	24.69	29.5	891.251	1000	Pass
	134	5670	21.71	22.19	24.97	29.78	950.605	1000	Pass
	142	5710	21.43	22.03	24.75	29.56	903.649	1000	Pass
	151	5755	21.20	21.99	24.62	29.34	859.014	1000	Pass
	159	5795	21.10	21.78	24.46	29.18	827.942	1000	Pass
802.11be (EHT80)	42	5210	20.98	21.77	24.40	27.75	595.662	1000	Pass
	58	5290	21.69	22.10	24.91	28.33	680.769	1000	Pass
	106	5530	20.84	21.42	24.15	28.96	787.046	1000	Pass
	122	5610	21.21	21.78	24.51	29.32	855.067	1000	Pass
	138	5690	21.44	22.03	24.76	29.57	905.733	1000	Pass
	155	5775	21.17	21.88	24.55	29.27	845.279	1000	Pass
802.11be (EHT160)	50	5250	20.25	20.71	23.50	26.92	492.04	1000	Pass
	114	5570	18.64	18.82	21.74	26.55	451.856	1000	Pass

Qualcomm Confidential_ May Contain Trade Secrets 2024-06-25 00:58:32 GMT Version:1 @gigabyte.com

Composite Antenna Gain Type	Frequency Range	Chain0 (dBi)	Chain1 (dBi)	Directional Gain (dBi)	Certification Power
Correlated	5150 ~ 5250 MHz:	3.35	3.35	3.35	S.A. Peak Power
	5250 ~ 5350 MHz:	3.42	3.35	3.42	
	5470 ~ 5725 MHz:	4.81	3.35	4.81	
	5725 ~ 5850 MHz:	4.72	3.35	4.72	

Mode	Channel	Frequency (MHz)	Conducted (dBm)			EIRP			Pass / Fail
			Chain0	Chain1	Total Power				
			Peak	Peak	Peak	Value (dBm)	Value (mW)	Limit (mW)	
802.11be (EHT20) 26-tone RU	36	5180	17.62	18.15	20.90	24.25	266.073	1000	Pass
	40	5200	17.78	18.43	21.13	24.48	280.543	1000	Pass
	48	5240	17.85	18.29	21.09	24.44	277.971	1000	Pass
	52	5260	17.76	18.42	21.11	24.53	283.792	1000	Pass
	60	5300	17.78	18.03	20.92	24.34	271.644	1000	Pass
	64	5320	18.04	18.35	21.21	24.63	290.402	1000	Pass
	100	5500	15.45	15.97	18.73	23.54	225.944	1000	Pass
	116	5580	15.65	16.64	19.18	23.99	250.611	1000	Pass
	140	5700	15.04	16.29	18.72	23.53	225.424	1000	Pass
	144	5720	15.43	16.51	19.01	23.82	240.991	1000	Pass
	149	5745	20.80	22.04	24.47	29.19	829.851	1000	Pass
	157	5785	20.79	22.15	24.53	29.25	841.395	1000	Pass
	165	5825	20.53	22.07	24.38	29.1	812.831	1000	Pass
802.11be (EHT20) 52-tone RU	36	5180	19.85	20.53	23.21	26.56	452.898	1000	Pass
	40	5200	20.15	20.85	23.52	26.87	486.407	1000	Pass
	48	5240	21.33	21.77	24.57	27.92	619.441	1000	Pass
	52	5260	20.00	21.01	23.54	26.96	496.592	1000	Pass
	60	5300	20.08	20.92	23.53	26.95	495.45	1000	Pass
	64	5320	21.58	22.26	24.94	28.36	685.488	1000	Pass
	100	5500	18.60	18.94	21.78	26.59	456.037	1000	Pass
	116	5580	18.81	19.46	22.16	26.97	497.737	1000	Pass
	140	5700	19.21	20.12	22.70	27.51	563.638	1000	Pass
	144	5720	19.42	20.05	22.76	27.57	571.479	1000	Pass
	149	5745	20.86	21.87	24.40	29.12	816.582	1000	Pass
	157	5785	20.78	21.75	24.30	29.02	797.995	1000	Pass
	165	5825	19.38	20.33	22.89	27.61	576.766	1000	Pass

Qualcomm Confidential - Mark Qontain Trade Secrets 2024-06-25 00:58:32 GMT yeyu@qualcomm.com

Mode	Channel	Frequency (MHz)	Conducted (dBm)			EIRP			Pass / Fail
			Chain0	Chain1	Total Power				
			Peak	Peak	Peak	Value (dBm)	Value (mW)	Limit (mW)	
802.11be (EHT20) 106-tone RU	36	5180	22.99	23.15	26.08	29.43	877.001	1000	Pass
	40	5200	23.37	23.17	26.28	29.63	918.333	1000	Pass
	48	5240	23.27	23.52	26.41	29.76	946.237	1000	Pass
	52	5260	22.55	22.66	25.62	29.04	801.678	1000	Pass
	60	5300	22.55	22.68	25.63	29.05	803.526	1000	Pass
	64	5320	22.61	23.30	25.98	29.4	870.964	1000	Pass
	100	5500	21.38	21.35	24.38	29.19	829.851	1000	Pass
	116	5580	21.60	22.25	24.95	29.76	946.237	1000	Pass
	140	5700	21.41	21.61	24.52	29.33	857.038	1000	Pass
	144	5720	21.37	21.62	24.51	29.32	855.067	1000	Pass
	149	5745	21.30	21.89	24.62	29.34	859.014	1000	Pass
	157	5785	21.20	21.95	24.60	29.32	855.067	1000	Pass
	165	5825	20.90	21.83	24.40	29.12	816.582	1000	Pass
802.11be (EHT20) 242-tone RU	40	5200	23.23	23.37	26.31	29.66	924.698	1000	Pass
	64	5320	22.93	23.73	26.36	29.78	950.605	1000	Pass
	116	5580	21.19	21.30	24.26	29.07	807.235	1000	Pass
	165	5825	21.36	22.27	24.85	29.57	905.733	1000	Pass
802.11be (EHT20) 484-tone RU	46	5230	19.19	19.67	22.45	25.8	380.189	1000	Pass
	62	5310	19.76	20.06	22.92	26.34	430.527	1000	Pass
	110	5550	21.83	22.06	24.96	29.77	948.418	1000	Pass
	159	5795	21.45	22.16	24.83	29.55	901.571	1000	Pass
802.11be (EHT20) 996-tone RU	42	5210	19.14	19.67	22.42	25.77	377.572	1000	Pass
	58	5290	18.74	19.15	21.96	25.38	345.144	1000	Pass
	138	5690	21.40	21.89	24.66	29.47	885.116	1000	Pass
	155	5775	21.47	22.07	24.79	29.51	893.305	1000	Pass
802.11be (EHT20) 2x996-tone RU	50	5250	20.07	20.62	23.36	26.78	476.431	1000	Pass
	114	5570	20.34	20.72	23.54	28.35	683.912	1000	Pass







Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 20:58:32 GMT vera.yu@gigabyte.com

Composite Antenna Gain Type	Frequency Range	Chain0 (dBi)	Chain1 (dBi)	Directional Gain (dBi)	Certification Power
Correlated	5150 ~ 5250 MHz:	3.35	3.35	3.35	S.A. Peak Power
	5250 ~ 5350 MHz:	3.42	3.35	3.42	
	5470 ~ 5725 MHz:	4.81	3.35	4.81	
	5725 ~ 5850 MHz:	4.72	3.35	4.72	

Mode	Channel	Frequency (MHz)	Conducted (dBm)			EIRP			Pass / Fail
			Chain0	Chain1	Total Power				
			Peak	Peak	Peak	Value (dBm)	Value (mW)	Limit (mW)	
802.11be (EHT20) 52+26-tone MRU	40	5200	20.97	21.79	24.41	27.76	597.035	1000	Pass
	64	5320	22.11	22.00	25.07	28.49	706.318	1000	Pass
	116	5580	20.59	20.53	23.57	28.38	688.652	1000	Pass
	165	5825	22.25	21.94	25.11	29.83	961.612	1000	Pass
802.11be (EHT20) 106+26-tone MRU	40	5200	22.86	23.33	26.11	29.46	883.08	1000	Pass
	64	5320	22.96	23.57	26.29	29.71	935.406	1000	Pass
	116	5580	21.64	22.10	24.89	29.7	933.254	1000	Pass
	165	5825	21.56	22.26	24.93	29.65	922.571	1000	Pass
802.11be (EHT80) 484+242-tone MRU	42	5210	20.76	21.34	24.07	27.42	552.077	1000	Pass
	58	5290	21.28	21.74	24.53	27.95	623.735	1000	Pass
	138	5690	21.70	22.30	25.02	29.83	961.612	1000	Pass
	155	5775	21.65	22.38	25.04	29.76	946.237	1000	Pass
802.11be (EHT160) 996+484-tone MRU	50	5250	21.11	21.81	24.48	27.9	616.595	1000	Pass
	114	5570	20.65	21.17	23.93	28.74	748.17	1000	Pass
802.11be (EHT80) Punctured by 20 MHz	42	5210	20.79	21.28	24.05	27.4	549.541	1000	Pass
	58	5290	21.52	22.06	24.81	28.23	665.273	1000	Pass
	138	5690	21.49	22.36	24.96	29.77	948.418	1000	Pass
	155	5775	21.19	21.96	24.60	29.32	855.067	1000	Pass
802.11be (EHT160) Punctured by 20 MHz	50	5250	20.42	21.06	23.76	27.18	522.396	1000	Pass
	114	5570	21.43	22.01	24.74	29.55	901.571	1000	Pass
802.11be (EHT160) Punctured by 40 MHz	50	5250	20.39	20.88	23.65	27.07	509.331	1000	Pass
	114	5570	19.06	19.32	22.20	27.01	502.343	1000	Pass







Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:58 GMT
jeraly.j@gigalogic.com

802.11a

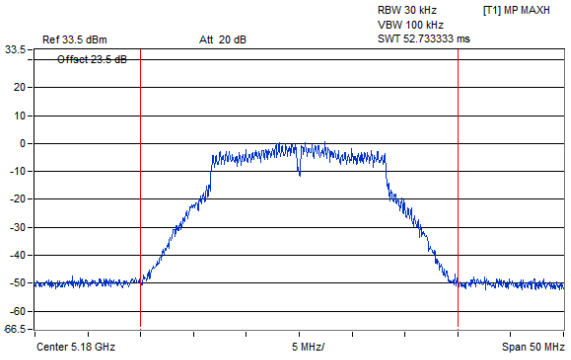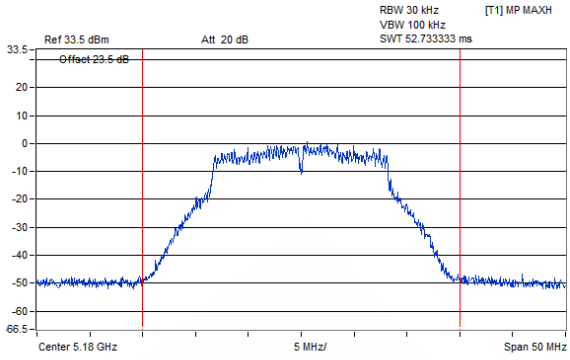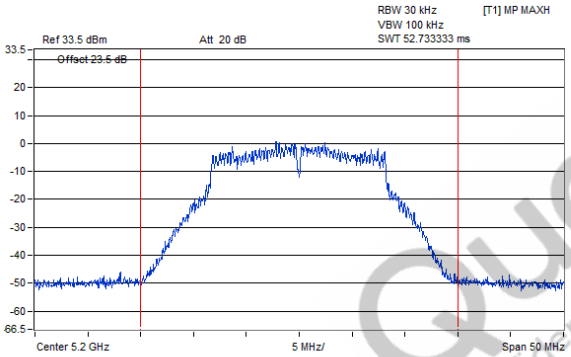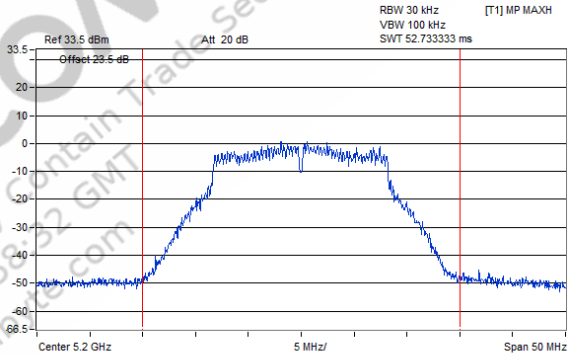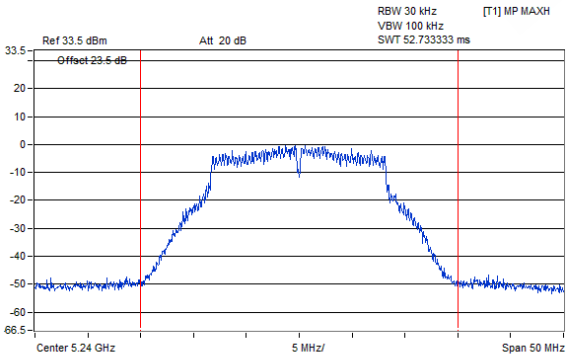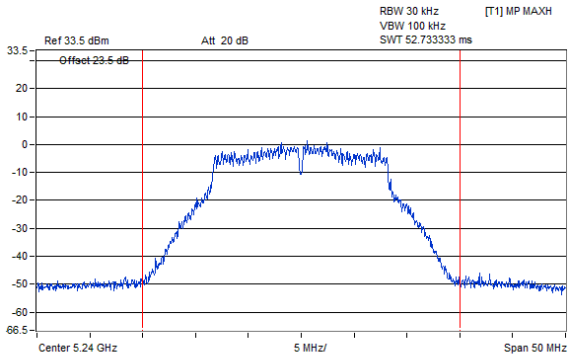Power Plot	
Chain 0	**Chain 1**
CH 36	
 TX Channel Bandwidth 30 MHz Power 23.32 dBm	 TX Channel Bandwidth 30 MHz Power 23.39 dBm
CH 40	
 TX Channel Bandwidth 30 MHz Power 23.45 dBm	 TX Channel Bandwidth 30 MHz Power 23.67 dBm
CH 48	
 TX Channel Bandwidth 30 MHz Power 23.17 dBm	 TX Channel Bandwidth 30 MHz Power 23.6 dBm







Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.v@gigasatte.com

Power Plot

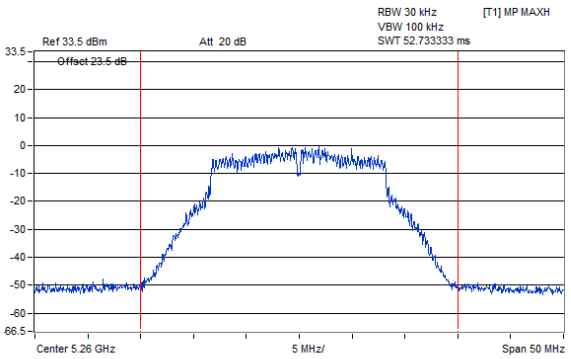
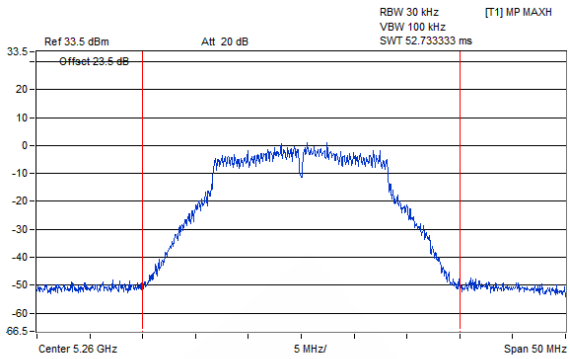
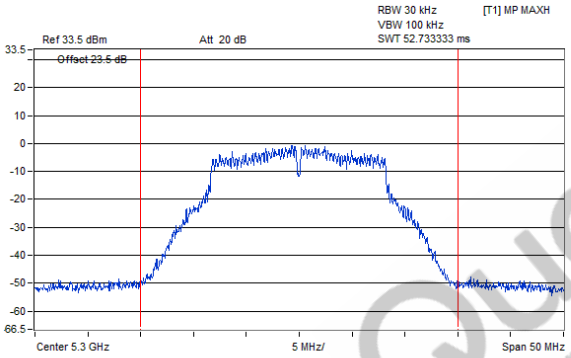
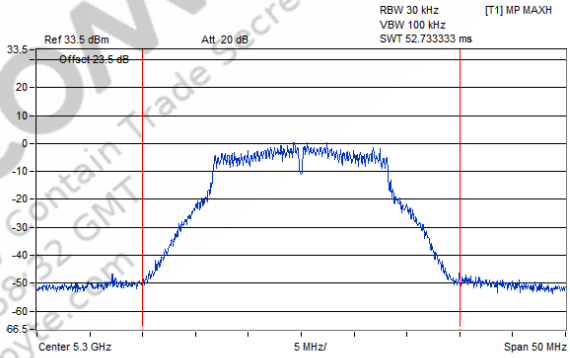
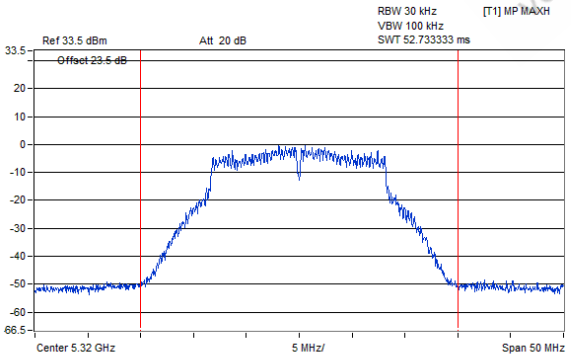
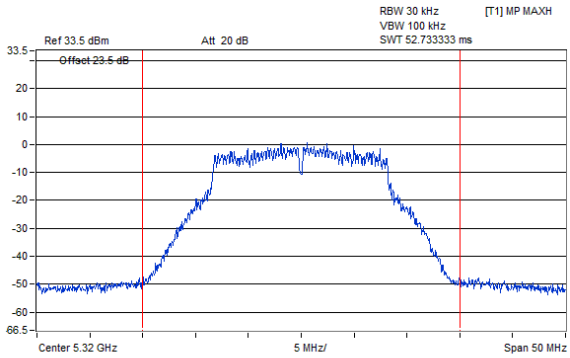
Chain 0	Chain 1
CH 52	
	
TX Channel Bandwidth 30 MHz Power 22.54 dBm	TX Channel Bandwidth 30 MHz Power 23.28 dBm
CH 60	
	
TX Channel Bandwidth 30 MHz Power 22.53 dBm	TX Channel Bandwidth 30 MHz Power 23.19 dBm
CH 64	
	
TX Channel Bandwidth 30 MHz Power 22.75 dBm	TX Channel Bandwidth 30 MHz Power 23.43 dBm

QualComm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT



Power Plot

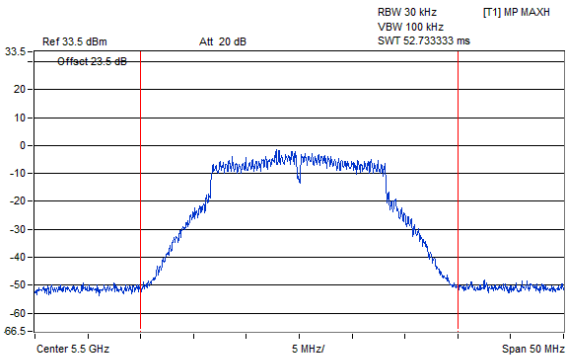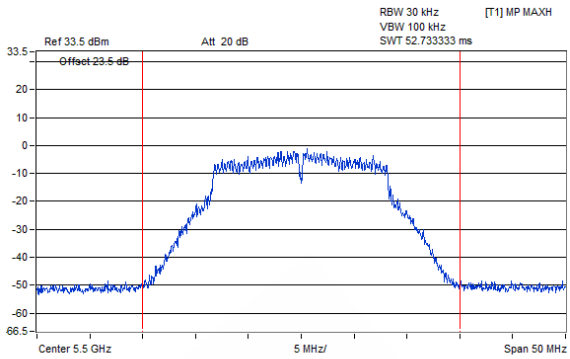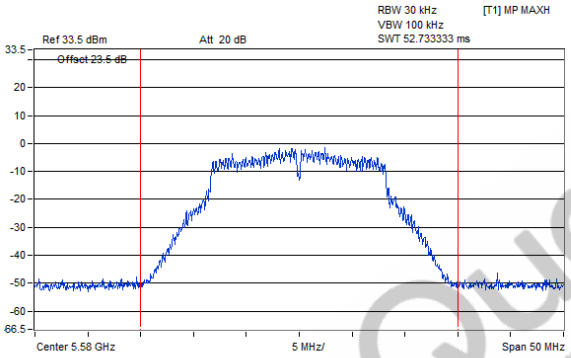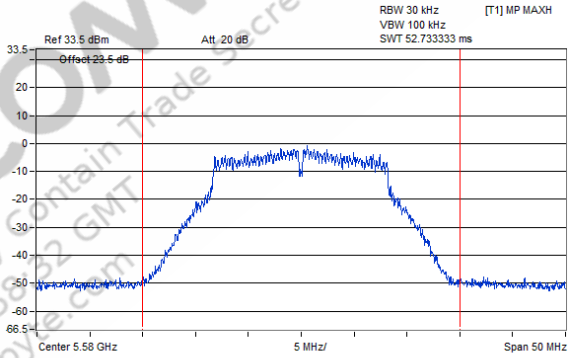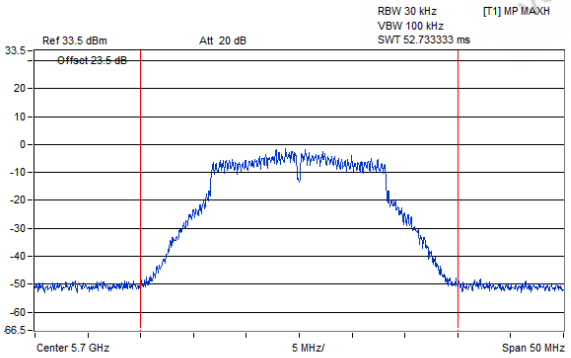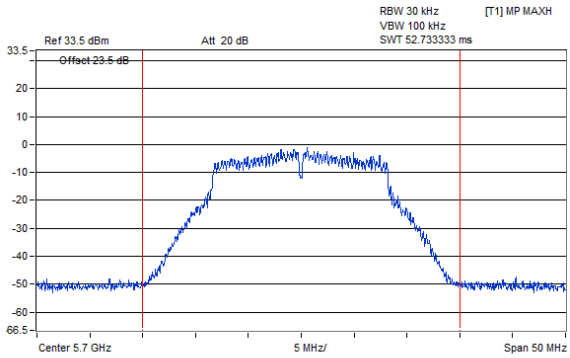Chain 0	Chain 1
CH 100	
	
TX Channel Bandwidth 30 MHz Power 21.05 dBm	TX Channel Bandwidth 30 MHz Power 21.38 dBm
CH 116	
	
TX Channel Bandwidth 30 MHz Power 21.41 dBm	TX Channel Bandwidth 30 MHz Power 21.81 dBm
CH 140	
	
TX Channel Bandwidth 30 MHz Power 21.12 dBm	TX Channel Bandwidth 30 MHz Power 21.69 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT

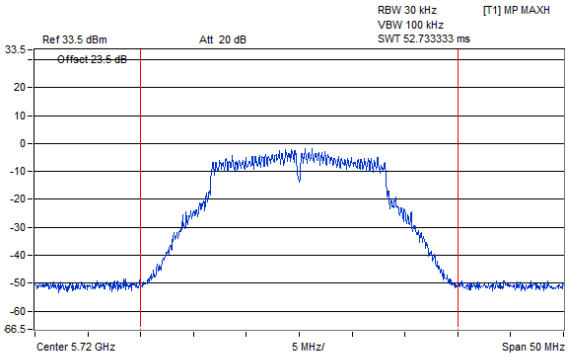
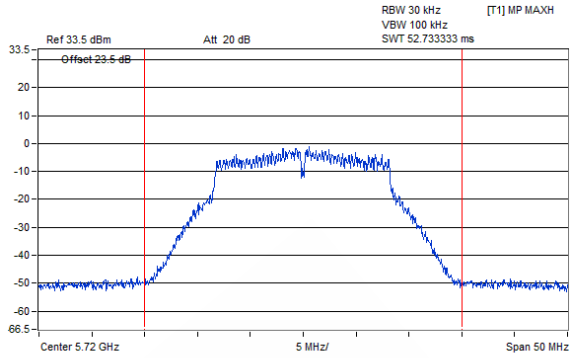
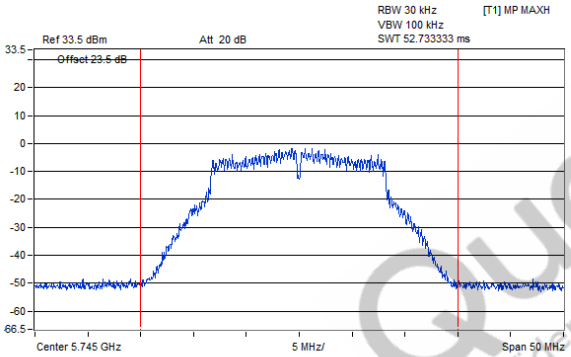
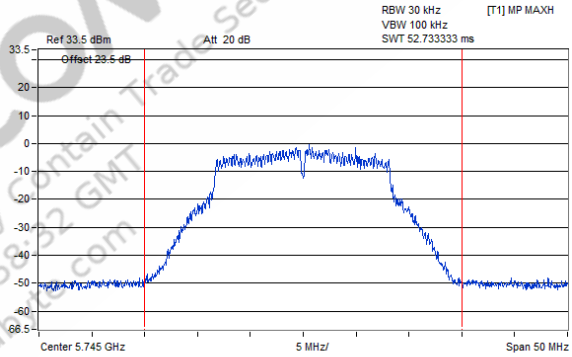
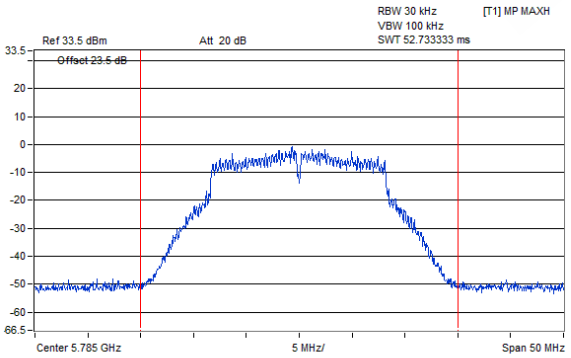
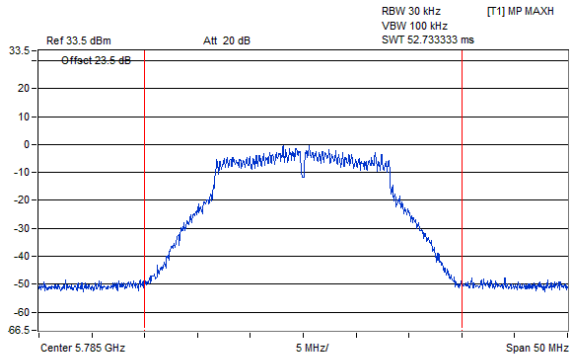
Power Plot	
Chain 0	**Chain 1**
CH 144	
 TX Channel Bandwidth 30 MHz Power 21.09 dBm	 TX Channel Bandwidth 30 MHz Power 21.67 dBm
CH 149	
 TX Channel Bandwidth 30 MHz Power 21.41 dBm	 TX Channel Bandwidth 30 MHz Power 22.04 dBm
CH 157	
 TX Channel Bandwidth 30 MHz Power 21.41 dBm	 TX Channel Bandwidth 30 MHz Power 22.07 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.v@gigasatte.com

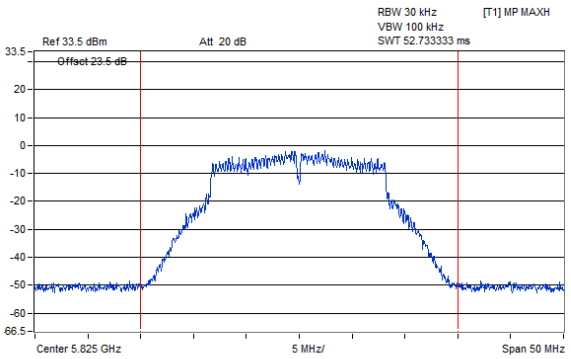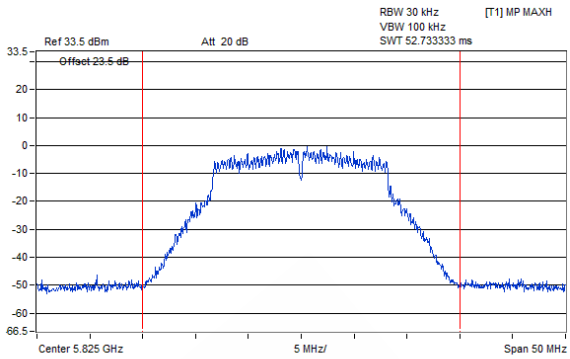Power Plot	
Chain 0	**Chain 1**
CH 165	
 TX Channel Bandwidth 30 MHz Power 21.36 dBm	 TX Channel Bandwidth 30 MHz Power 22.16 dBm







Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT20)

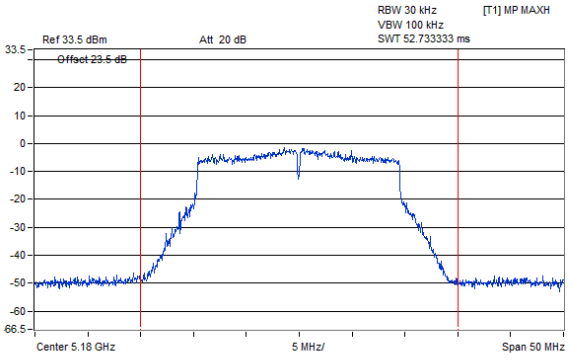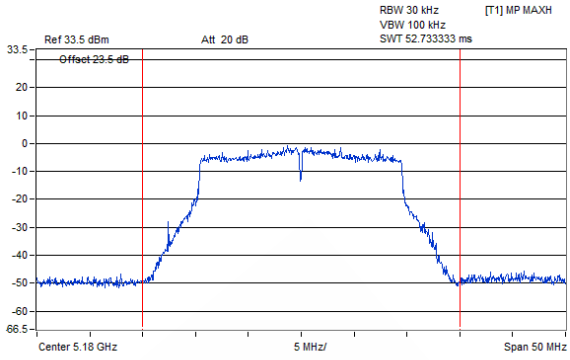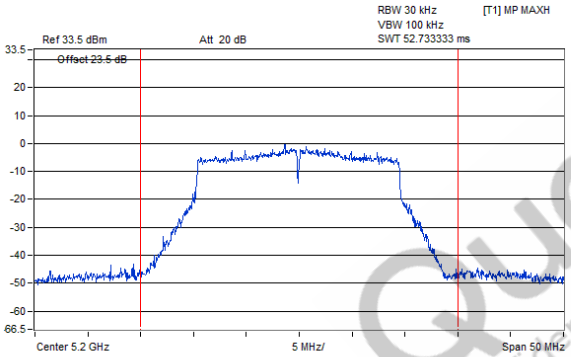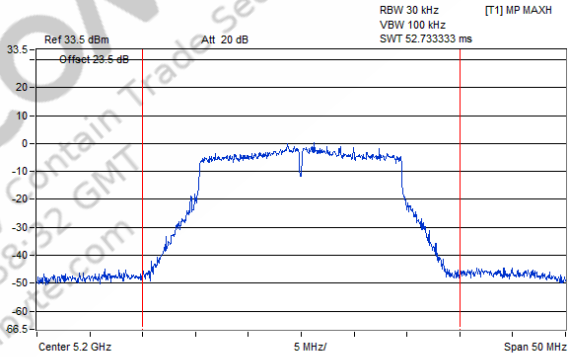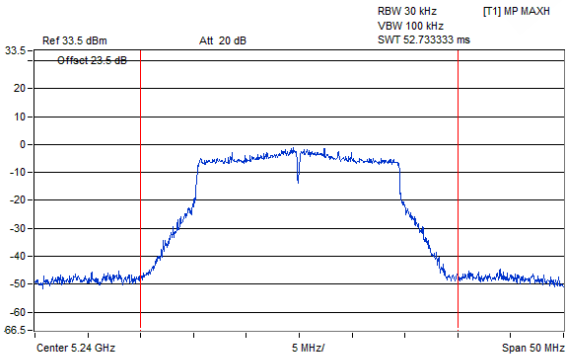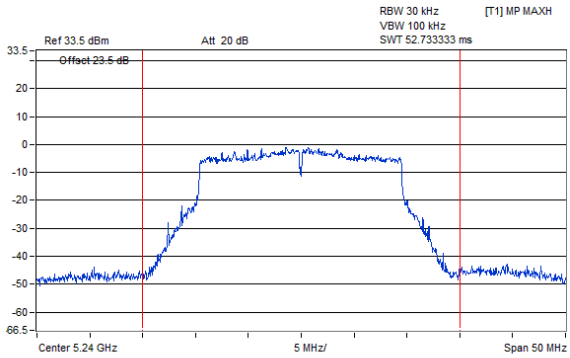Power Plot	
Chain 0	**Chain 1**
CH 36	
 TX Channel Bandwidth 30 MHz Power 23.05 dBm	 TX Channel Bandwidth 30 MHz Power 23.45 dBm
CH 40	
 TX Channel Bandwidth 30 MHz Power 23.21 dBm	 TX Channel Bandwidth 30 MHz Power 23.79 dBm
CH 48	
 TX Channel Bandwidth 30 MHz Power 23.03 dBm	 TX Channel Bandwidth 30 MHz Power 23.64 dBm







Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yuggiagate.com

Power Plot

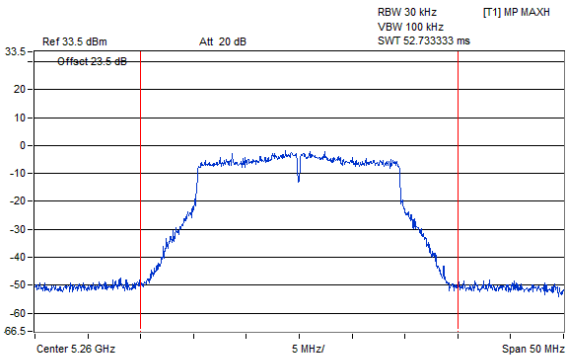
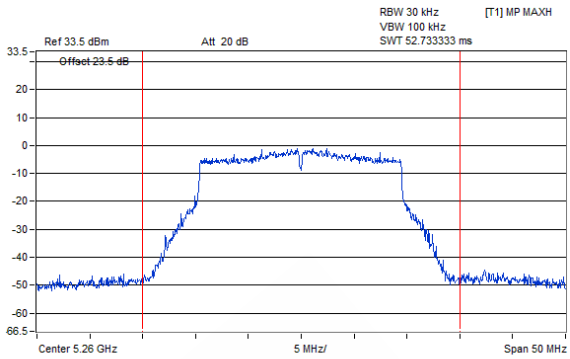
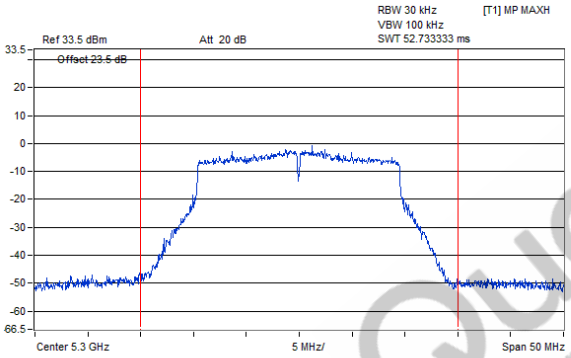
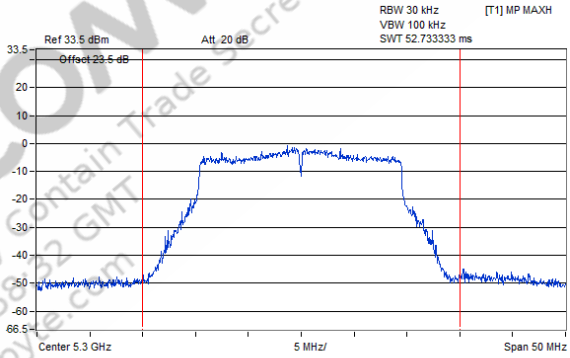
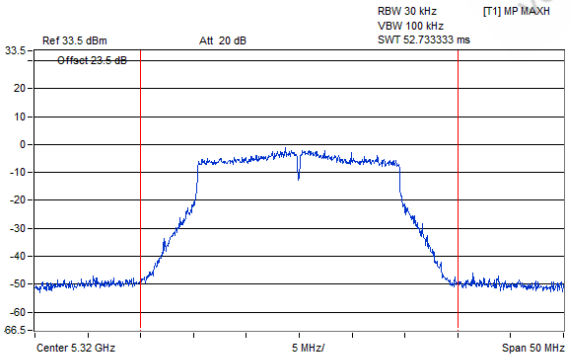
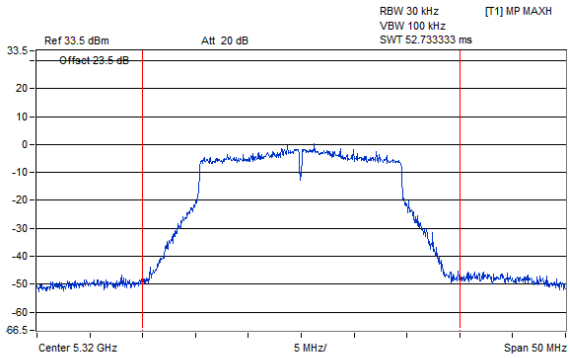
Chain 0	Chain 1
CH 52	
	
TX Channel Bandwidth 30 MHz Power 22.48 dBm	TX Channel Bandwidth 30 MHz Power 23.57 dBm
CH 60	
	
TX Channel Bandwidth 30 MHz Power 22.61 dBm	TX Channel Bandwidth 30 MHz Power 23.12 dBm
CH 64	
	
TX Channel Bandwidth 30 MHz Power 22.72 dBm	TX Channel Bandwidth 30 MHz Power 23.59 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT



Power Plot

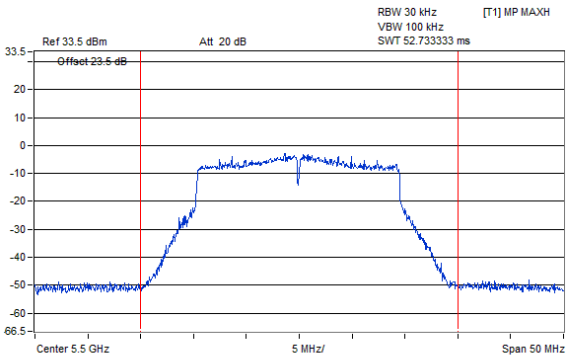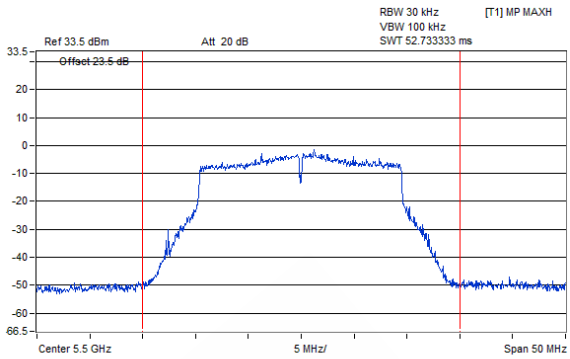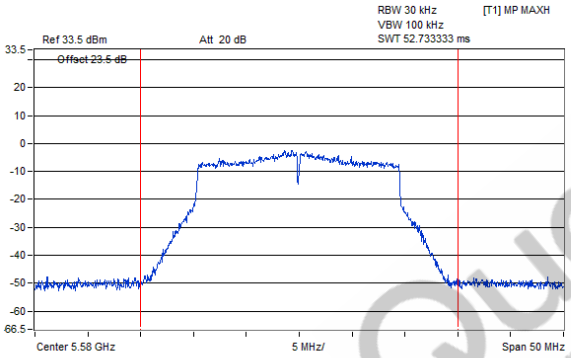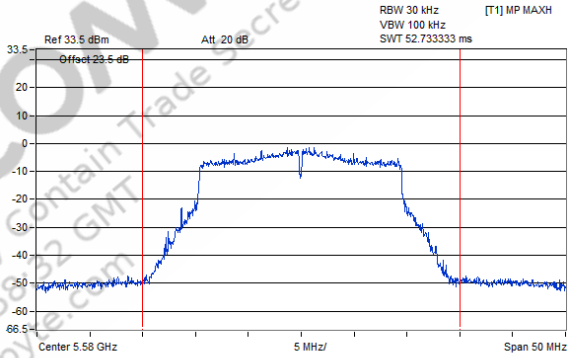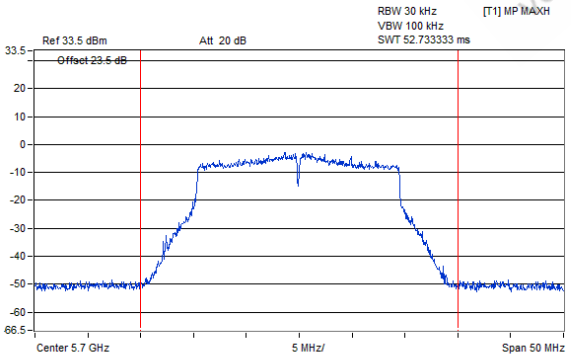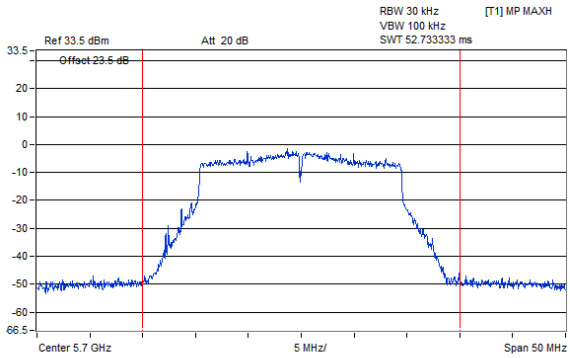Chain 0	Chain 1
CH 100	
	
TX Channel Bandwidth 30 MHz Power 21.48 dBm	TX Channel Bandwidth 30 MHz Power 21.96 dBm
CH 116	
	
TX Channel Bandwidth 30 MHz Power 21.69 dBm	TX Channel Bandwidth 30 MHz Power 22.32 dBm
CH 140	
	
TX Channel Bandwidth 30 MHz Power 21.42 dBm	TX Channel Bandwidth 30 MHz Power 22.27 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT

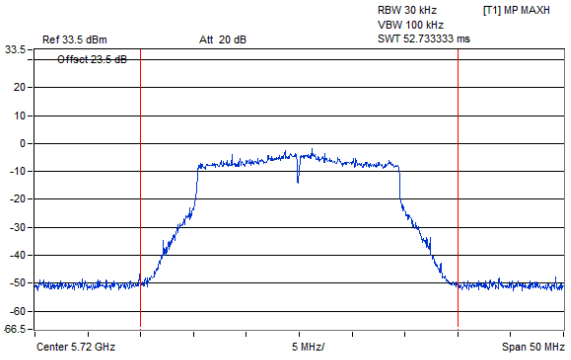
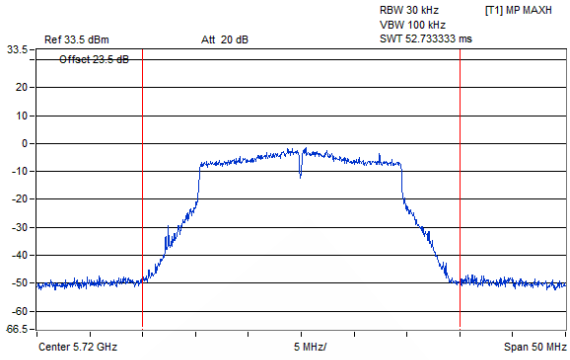
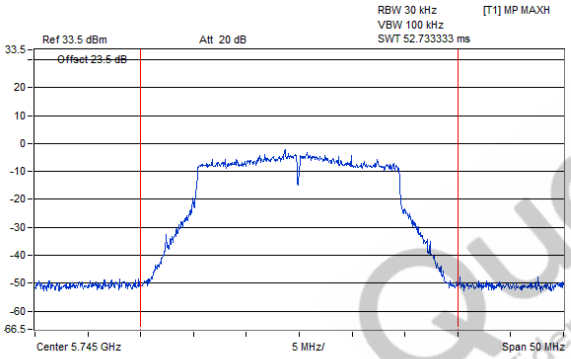
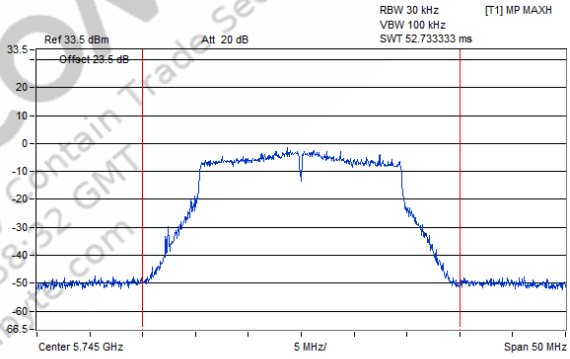
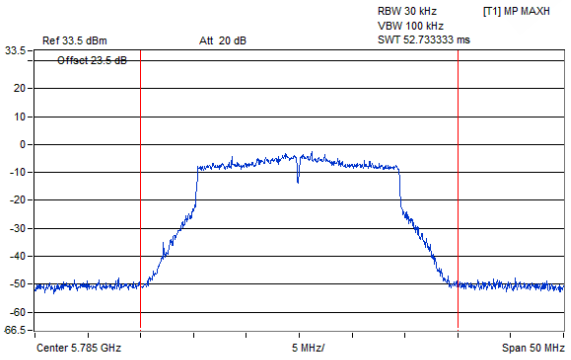
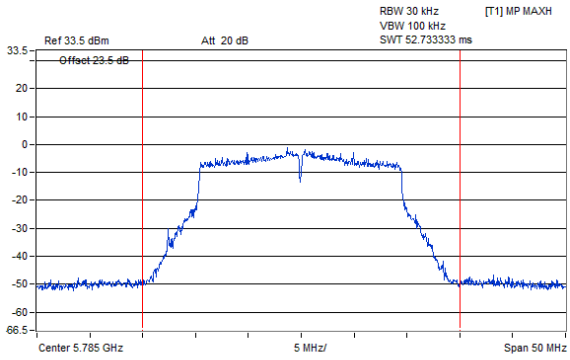
Power Plot	
Chain 0	**Chain 1**
CH 144	
 TX Channel Bandwidth 30 MHz Power 21.37 dBm	 TX Channel Bandwidth 30 MHz Power 22.42 dBm
CH 149	
 TX Channel Bandwidth 30 MHz Power 21.27 dBm	 TX Channel Bandwidth 30 MHz Power 22.22 dBm
CH 157	
 TX Channel Bandwidth 30 MHz Power 21.21 dBm	 TX Channel Bandwidth 30 MHz Power 22.23 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.v@gigastate.com

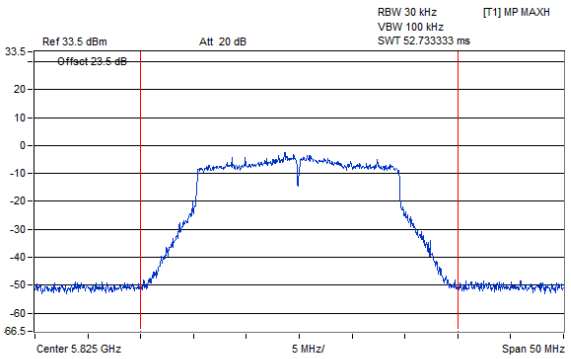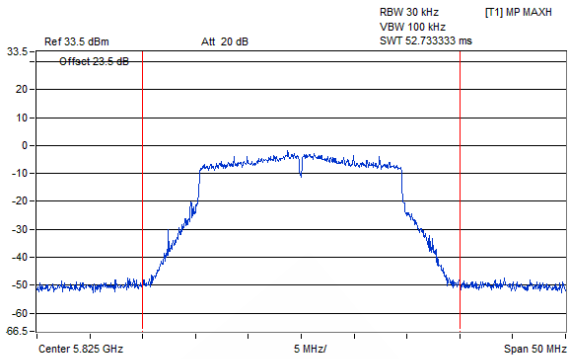Power Plot	
Chain 0	**Chain 1**
CH 165	
 TX Channel Bandwidth 30 MHz Power 21.2 dBm	 TX Channel Bandwidth 30 MHz Power 22.03 dBm







Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT40)

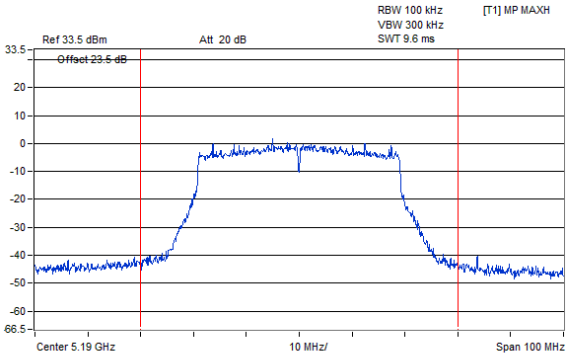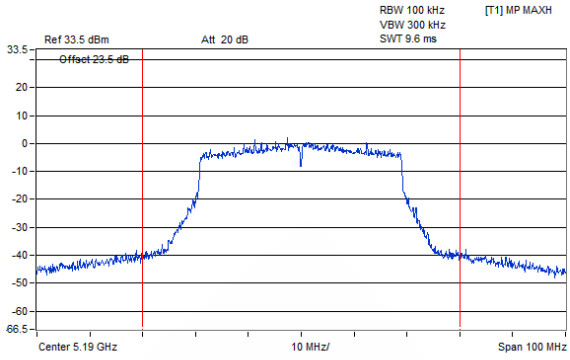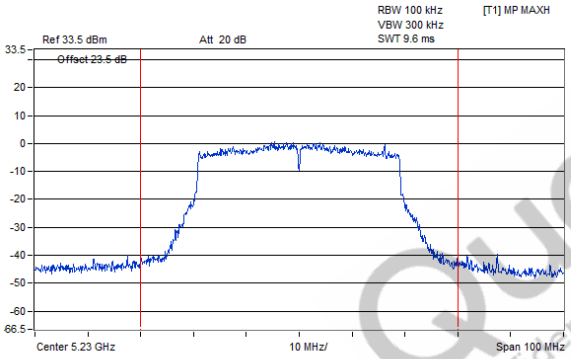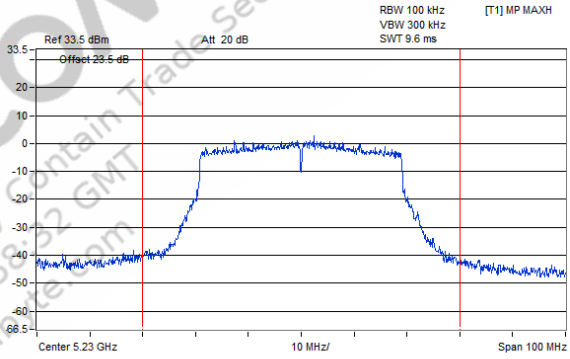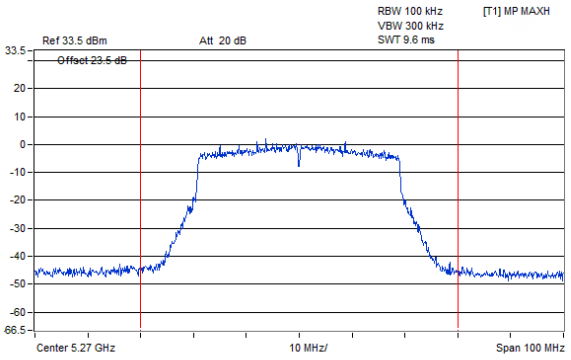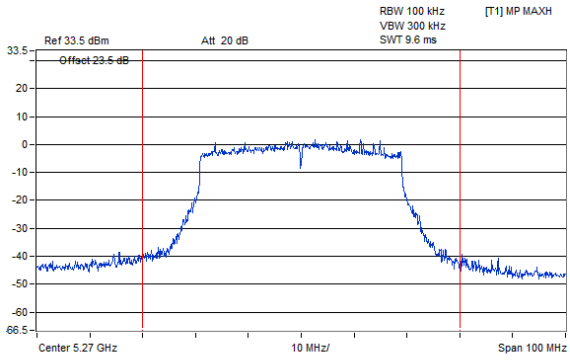Power Plot	
Chain 0	**Chain 1**
CH 38	
 TX Channel Bandwidth 60 MHz Power 22.74 dBm	 TX Channel Bandwidth 60 MHz Power 23.13 dBm
CH 46	
 TX Channel Bandwidth 60 MHz Power 23.09 dBm	 TX Channel Bandwidth 60 MHz Power 23.73 dBm
CH 54	
 TX Channel Bandwidth 60 MHz Power 23.15 dBm	 TX Channel Bandwidth 60 MHz Power 23.76 dBm







Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.vinciguerra@bureauveritas.com

Power Plot

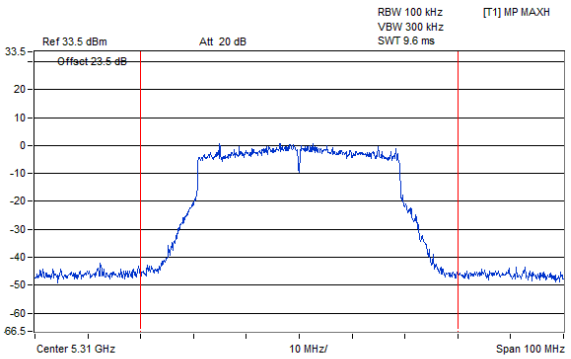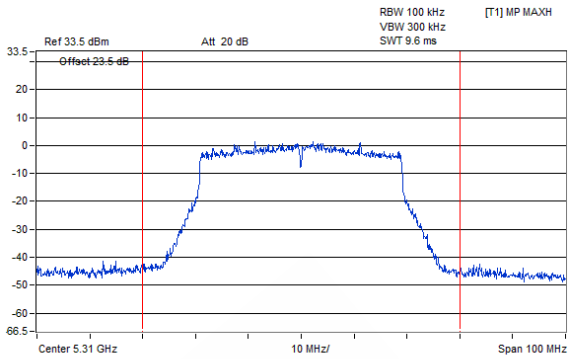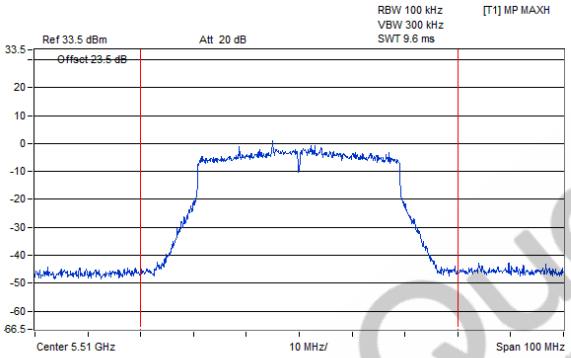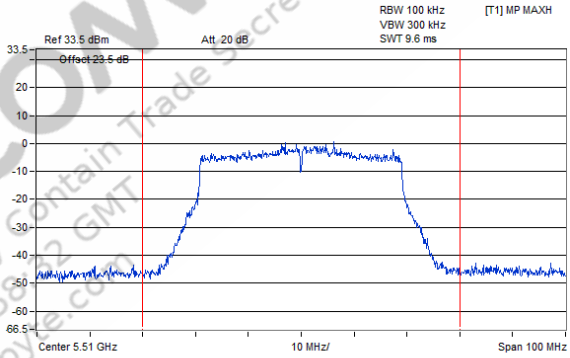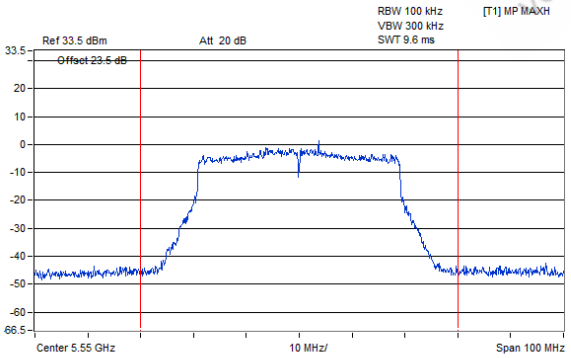
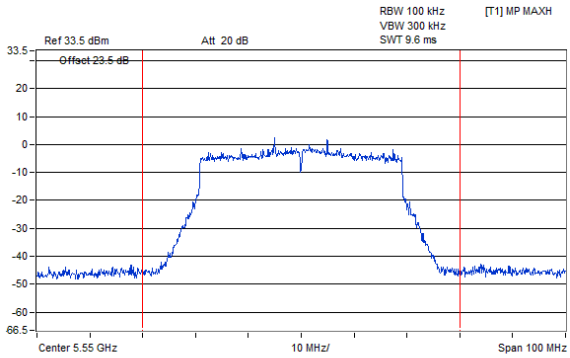
Chain 0	Chain 1
CH 62	
	
TX Channel Bandwidth 60 MHz Power 23.07 dBm	TX Channel Bandwidth 60 MHz Power 23.61 dBm
CH 102	
	
TX Channel Bandwidth 60 MHz Power 21.29 dBm	TX Channel Bandwidth 60 MHz Power 21.66 dBm
CH 110	
	
TX Channel Bandwidth 60 MHz Power 21.45 dBm	TX Channel Bandwidth 60 MHz Power 21.9 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT

Power Plot

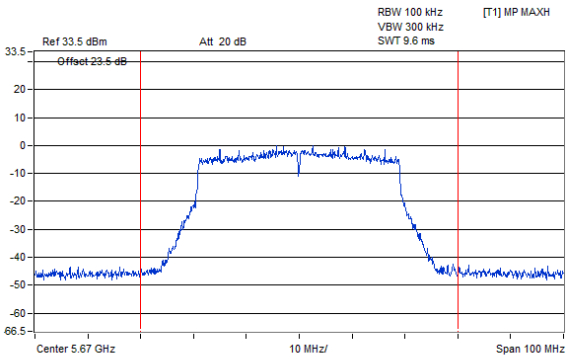
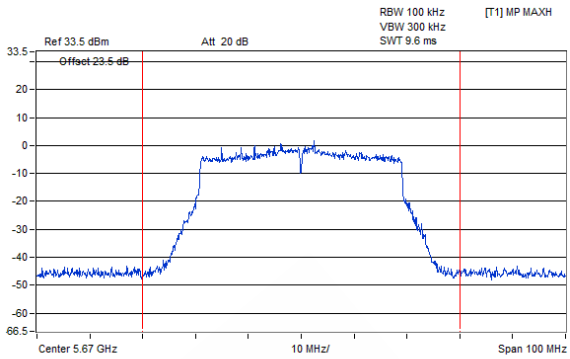
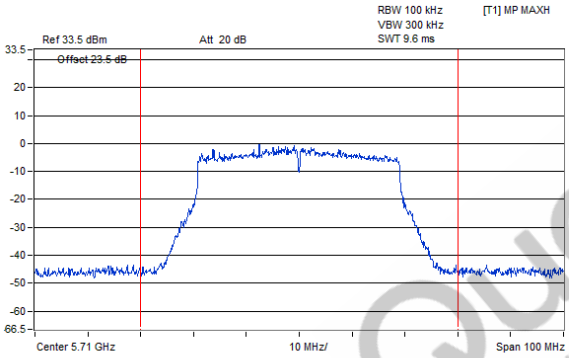
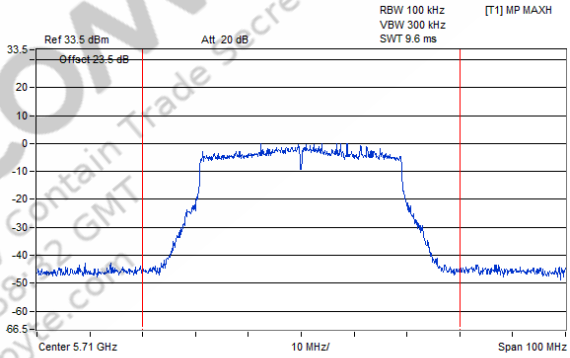
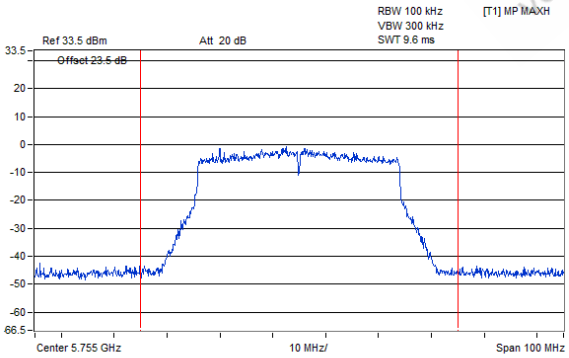
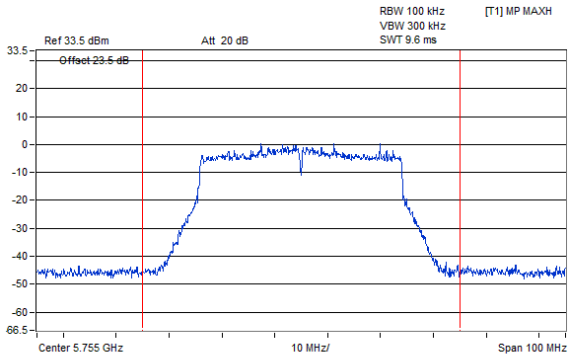
Chain 0	Chain 1
CH 134	
	
TX Channel Bandwidth 60 MHz Power 21.71 dBm	TX Channel Bandwidth 60 MHz Power 22.19 dBm
CH 142	
	
TX Channel Bandwidth 60 MHz Power 21.43 dBm	TX Channel Bandwidth 60 MHz Power 22.03 dBm
CH 151	
	
TX Channel Bandwidth 60 MHz Power 21.2 dBm	TX Channel Bandwidth 60 MHz Power 21.99 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT

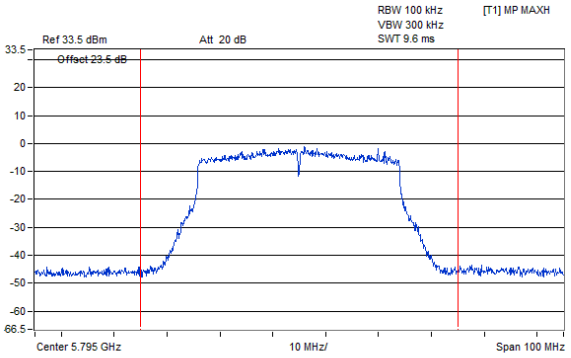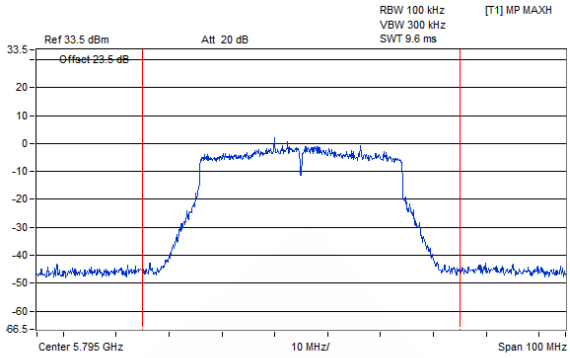Power Plot	
Chain 0	**Chain 1**
CH 159	
 TX Channel Bandwidth 60 MHz Power 21.1 dBm	 TX Channel Bandwidth 60 MHz Power 21.78 dBm







Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT80)

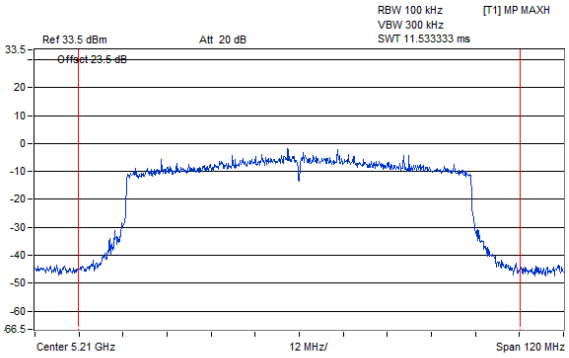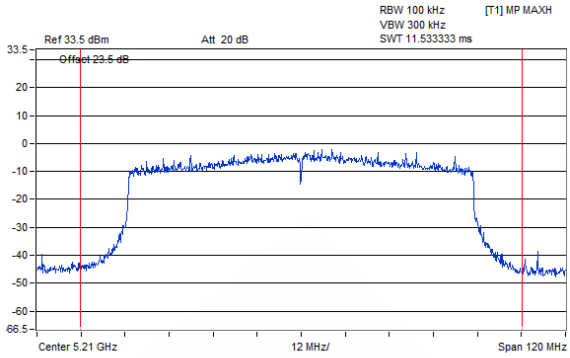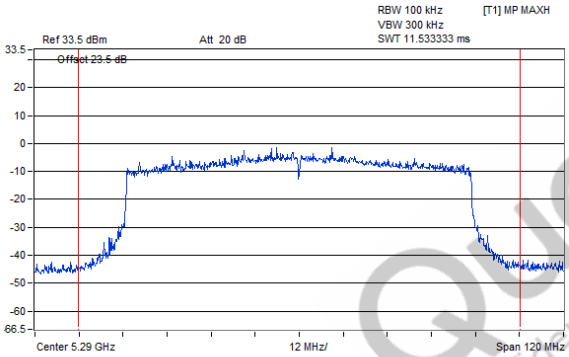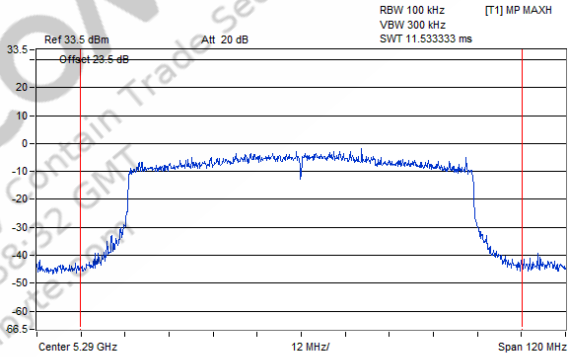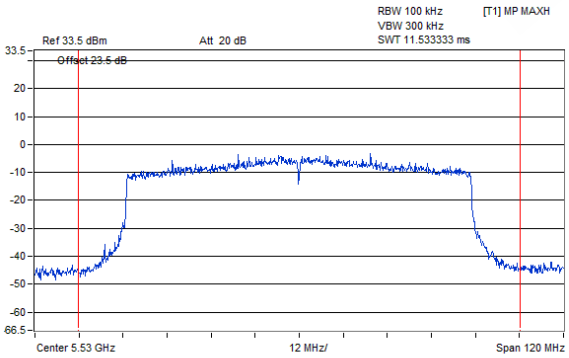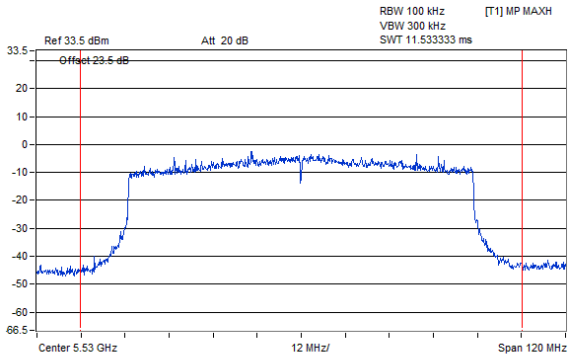Power Plot	
Chain 0	**Chain 1**
CH 42	
 TX Channel Bandwidth 100 MHz Power 20.98 dBm	 TX Channel Bandwidth 100 MHz Power 21.77 dBm
CH 58	
 TX Channel Bandwidth 100 MHz Power 21.69 dBm	 TX Channel Bandwidth 100 MHz Power 22.1 dBm
CH 106	
 TX Channel Bandwidth 100 MHz Power 20.84 dBm	 TX Channel Bandwidth 100 MHz Power 21.42 dBm





Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.viggiani@bureauveritas.com

Power Plot

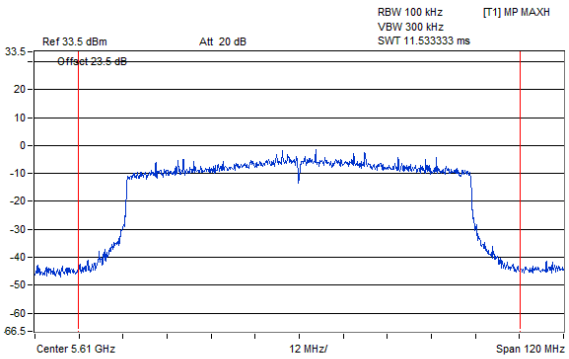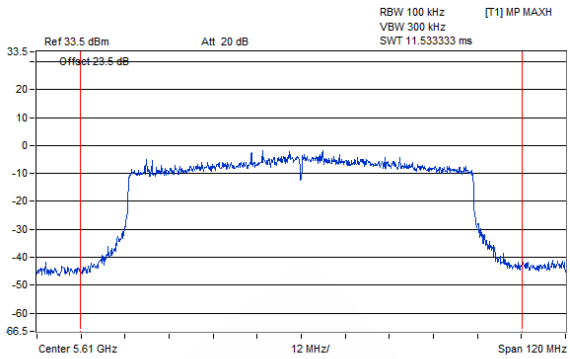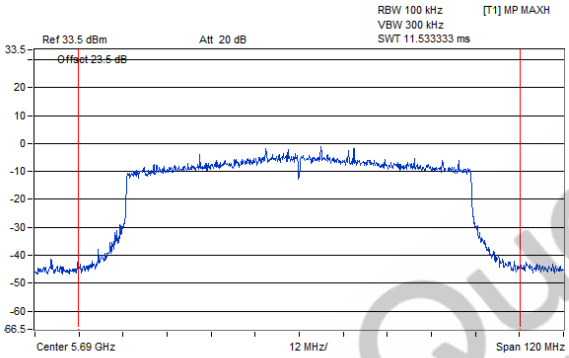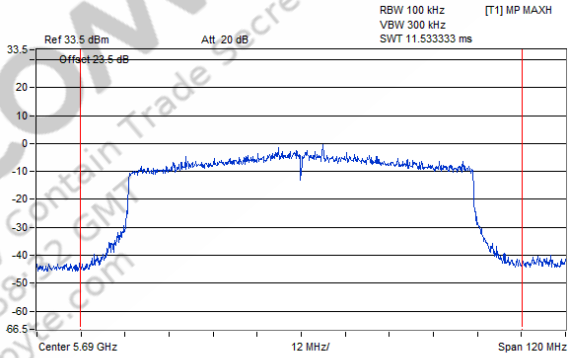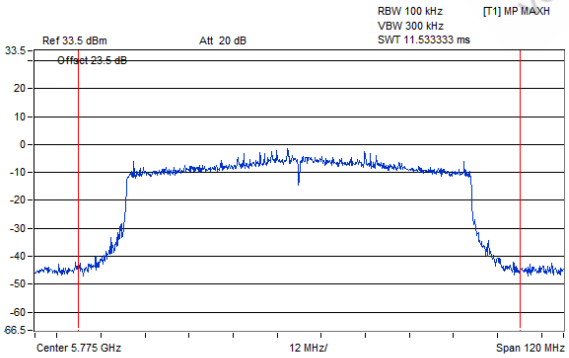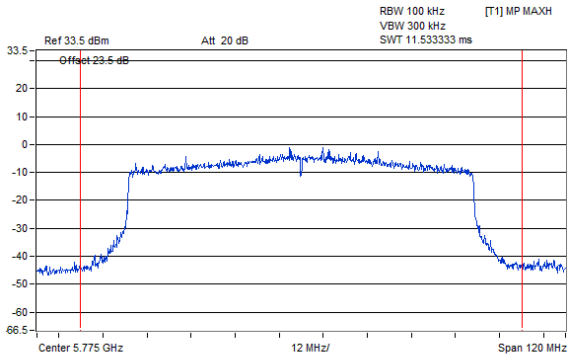Chain 0	Chain 1
CH 122	
	
TX Channel Bandwidth 100 MHz Power 21.21 dBm	TX Channel Bandwidth 100 MHz Power 21.78 dBm
CH 138	
	
TX Channel Bandwidth 100 MHz Power 21.44 dBm	TX Channel Bandwidth 100 MHz Power 22.03 dBm
CH 155	
	
TX Channel Bandwidth 100 MHz Power 21.17 dBm	TX Channel Bandwidth 100 MHz Power 21.88 dBm







QualComm Confidential - May Contain Trade Secrets 2024-06-25 00:58:12 GMT Vera Li gigabyte.com

802.11be (EHT160)

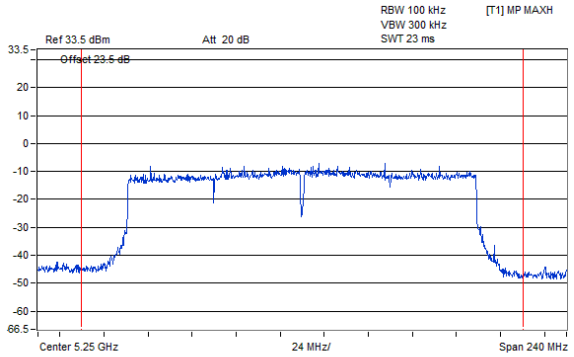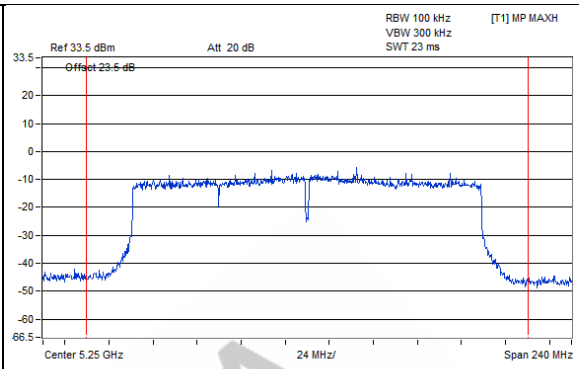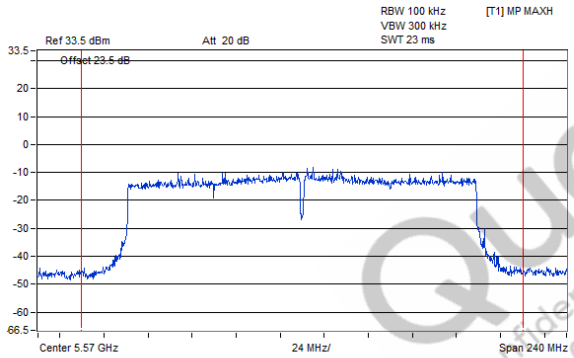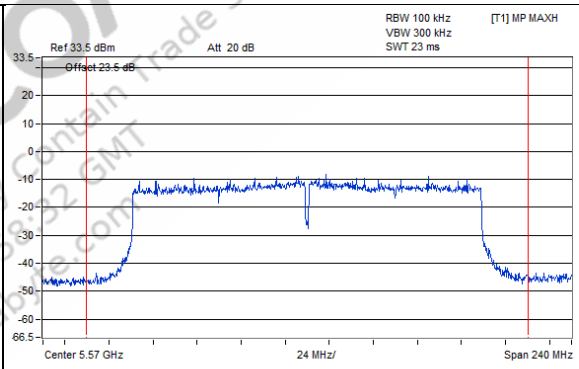Power Plot	
Chain 0	**Chain 1**
CH 50	
 TX Channel Bandwidth 200 MHz Power 20.25 dBm	 TX Channel Bandwidth 200 MHz Power 20.71 dBm
CH 114	
 TX Channel Bandwidth 200 MHz Power 18.64 dBm	 TX Channel Bandwidth 200 MHz Power 18.82 dBm







Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.vu@gigabyte.com

802.11be (EHT20) 26-tone RU

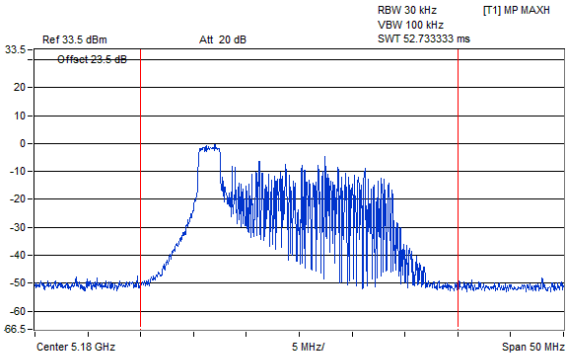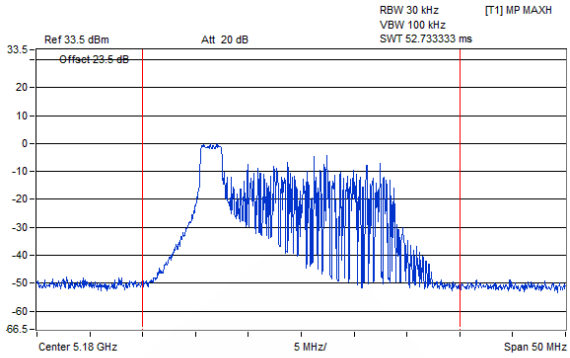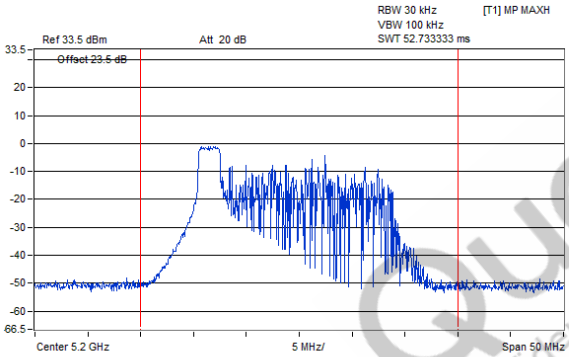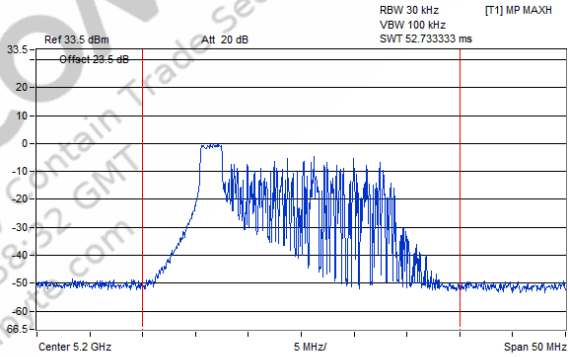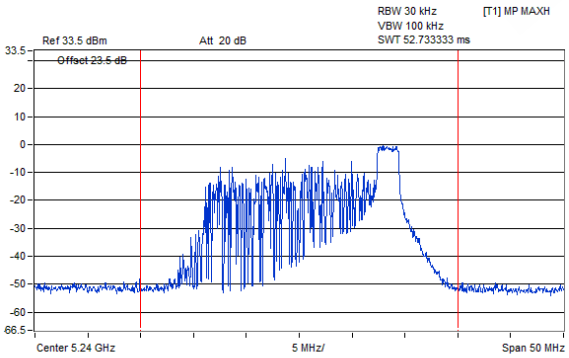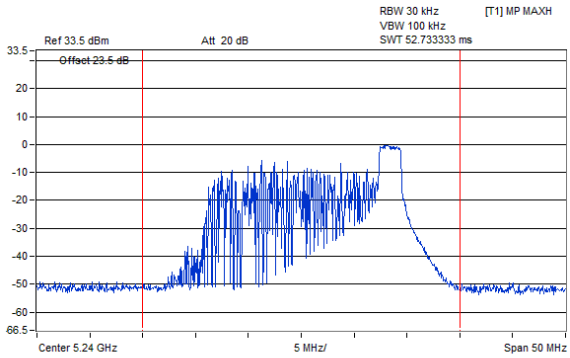Power Plot	
Chain 0	**Chain 1**
CH 36	
 TX Channel Bandwidth 30 MHz Power 17.62 dBm	 TX Channel Bandwidth 30 MHz Power 18.15 dBm
CH 40	
 TX Channel Bandwidth 30 MHz Power 17.78 dBm	 TX Channel Bandwidth 30 MHz Power 18.43 dBm
CH 48	
 TX Channel Bandwidth 30 MHz Power 17.85 dBm	 TX Channel Bandwidth 30 MHz Power 18.29 dBm







Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.vinciguerra@tc.com

Power Plot

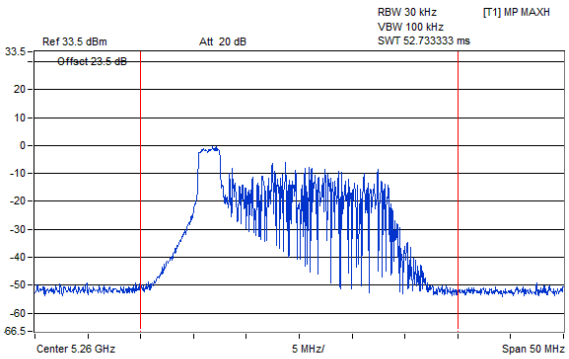
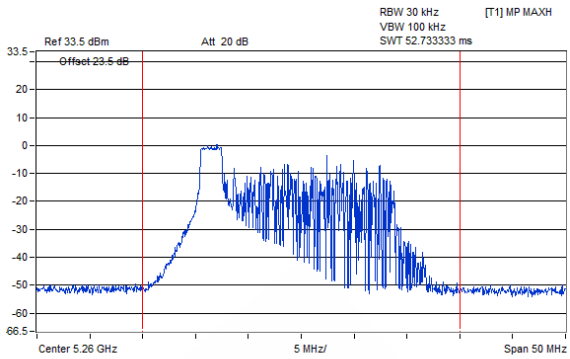
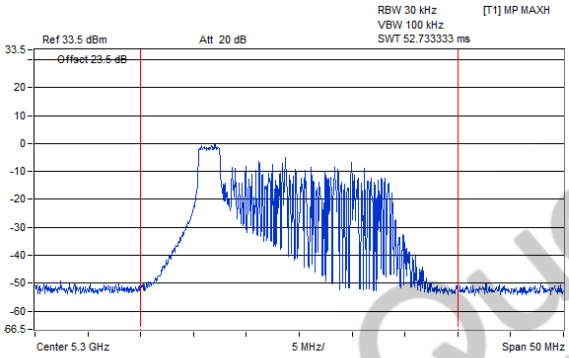
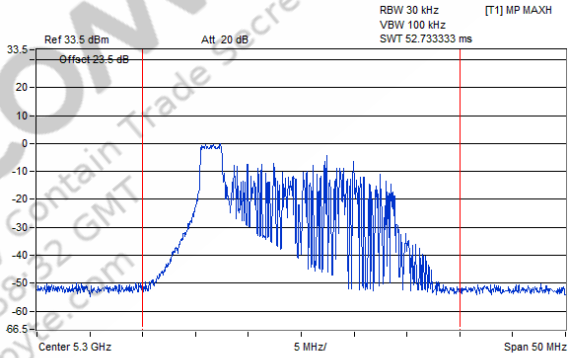
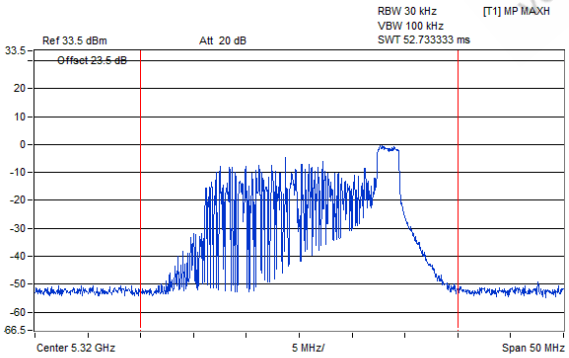
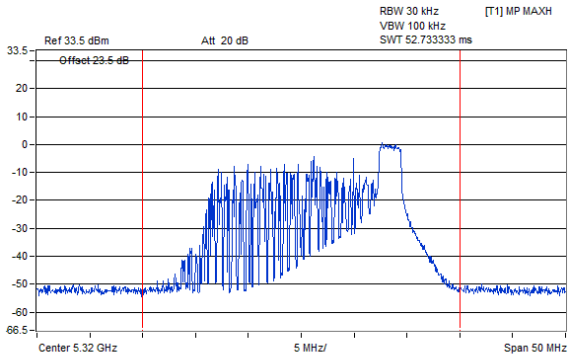
Chain 0	Chain 1
CH 52	
	
TX Channel Bandwidth 30 MHz Power 17.76 dBm	TX Channel Bandwidth 30 MHz Power 18.42 dBm
CH 60	
	
TX Channel Bandwidth 30 MHz Power 17.78 dBm	TX Channel Bandwidth 30 MHz Power 18.03 dBm
CH 64	
	
TX Channel Bandwidth 30 MHz Power 18.04 dBm	TX Channel Bandwidth 30 MHz Power 18.35 dBm

QualComm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT



Power Plot

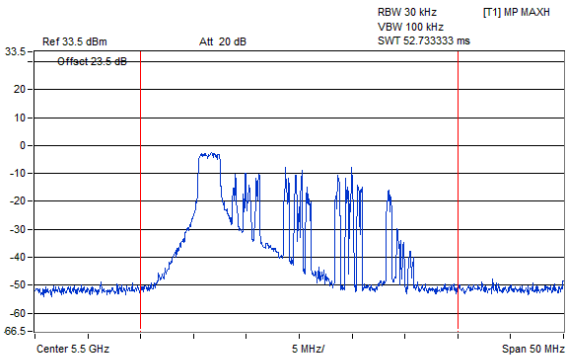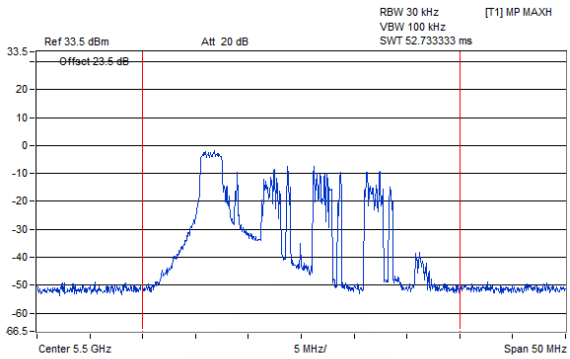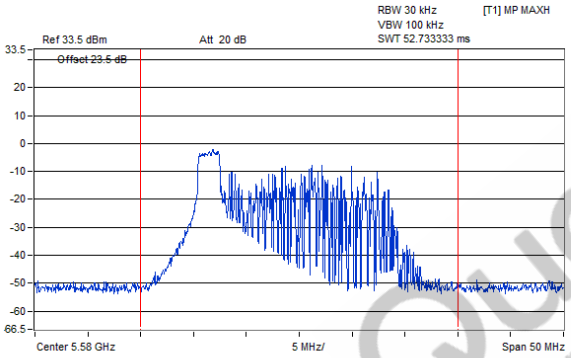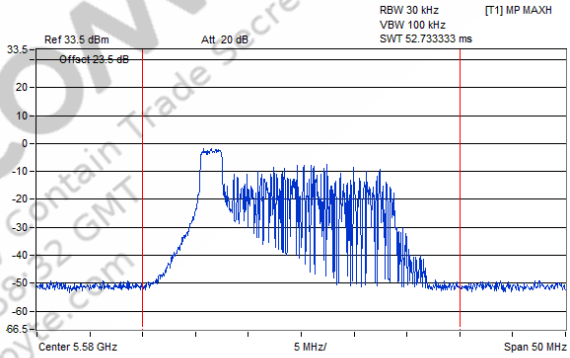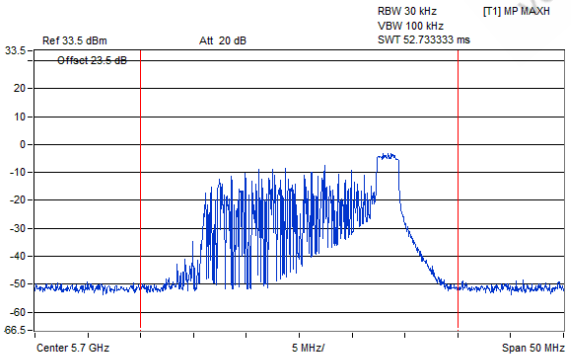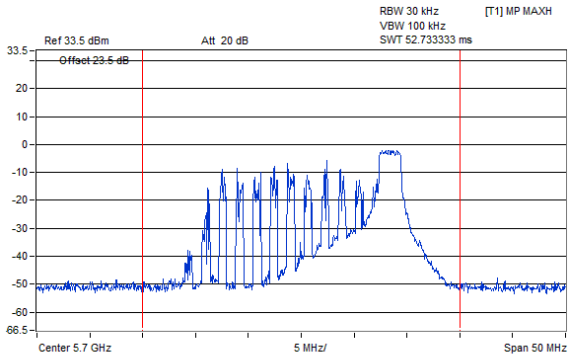Chain 0	Chain 1
CH 100	
	
TX Channel Bandwidth 30 MHz Power 15.45 dBm	TX Channel Bandwidth 30 MHz Power 15.97 dBm
CH 116	
	
TX Channel Bandwidth 30 MHz Power 15.65 dBm	TX Channel Bandwidth 30 MHz Power 16.64 dBm
CH 140	
	
TX Channel Bandwidth 30 MHz Power 15.04 dBm	TX Channel Bandwidth 30 MHz Power 16.29 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT

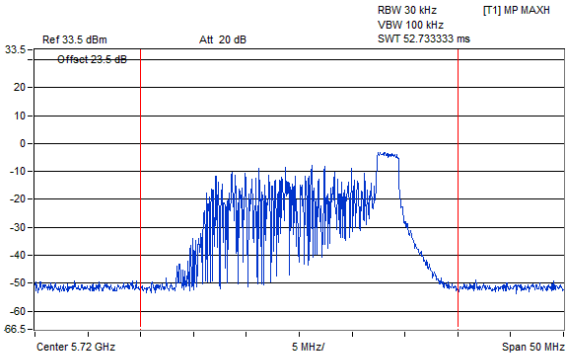
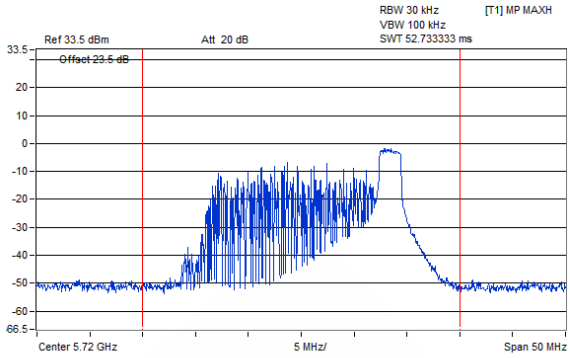
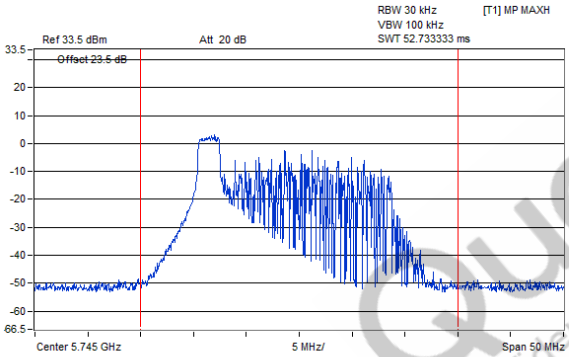
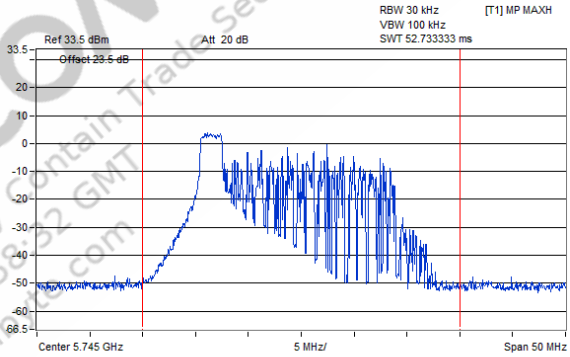
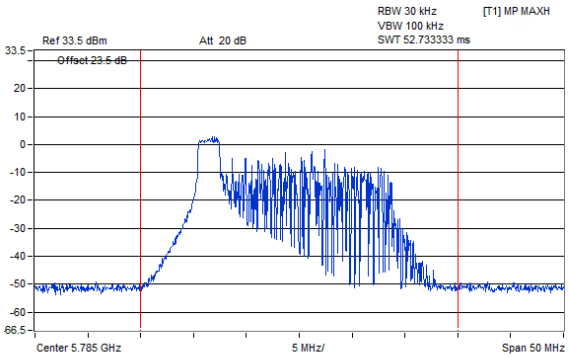
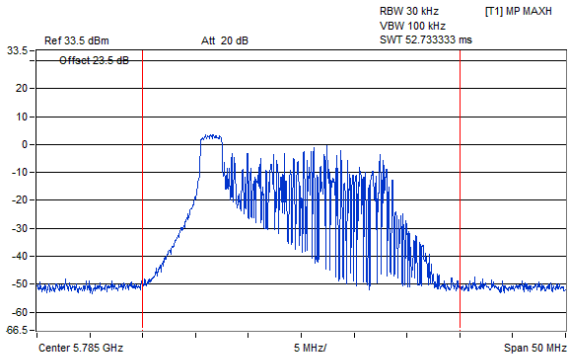
Power Plot	
Chain 0	**Chain 1**
CH 144	
 TX Channel Bandwidth 30 MHz Power 15.43 dBm	 TX Channel Bandwidth 30 MHz Power 16.51 dBm
CH 149	
 TX Channel Bandwidth 30 MHz Power 20.8 dBm	 TX Channel Bandwidth 30 MHz Power 22.04 dBm
CH 157	
 TX Channel Bandwidth 30 MHz Power 20.79 dBm	 TX Channel Bandwidth 30 MHz Power 22.15 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.v@gigasat.com

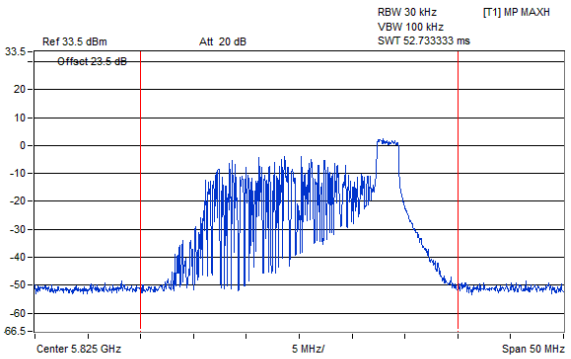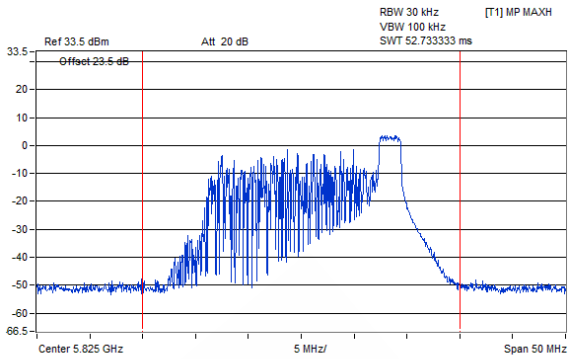Power Plot	
Chain 0	**Chain 1**
CH 165	
 TX Channel Bandwidth 30 MHz Power 20.53 dBm	 TX Channel Bandwidth 30 MHz Power 22.07 dBm







Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT20) 52-tone RU

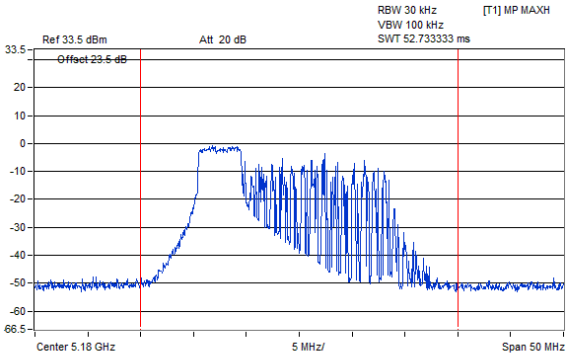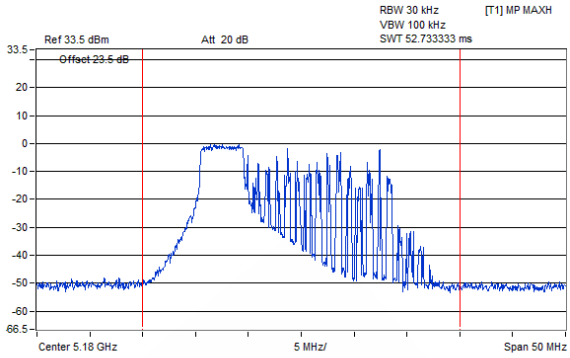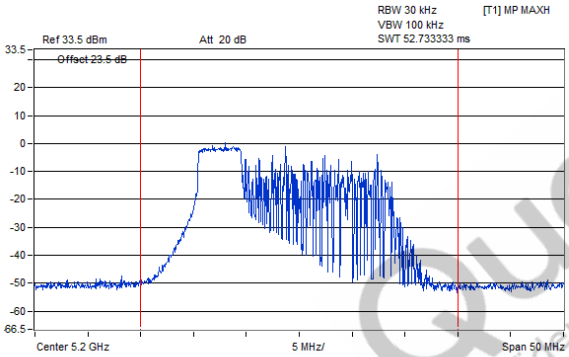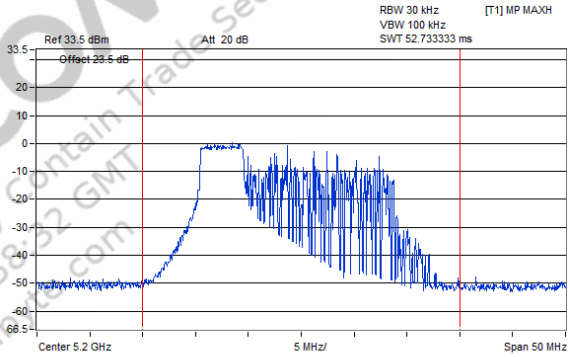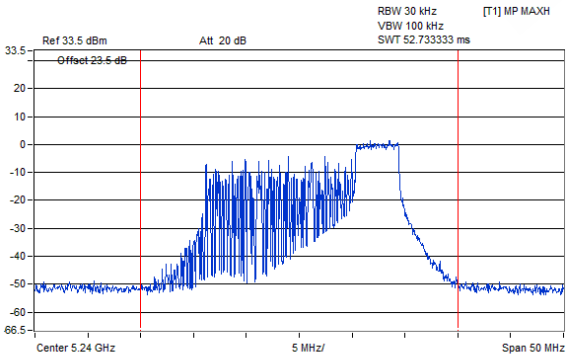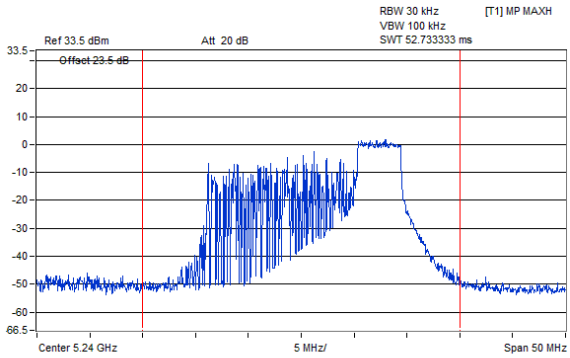Power Plot	
Chain 0	**Chain 1**
CH 36	
 TX Channel Bandwidth 30 MHz Power 19.85 dBm	 TX Channel Bandwidth 30 MHz Power 20.53 dBm
CH 40	
 TX Channel Bandwidth 30 MHz Power 20.15 dBm	 TX Channel Bandwidth 30 MHz Power 20.85 dBm
CH 48	
 TX Channel Bandwidth 30 MHz Power 21.33 dBm	 TX Channel Bandwidth 30 MHz Power 21.77 dBm







Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.vinciguerra@bureauveritas.com

Power Plot

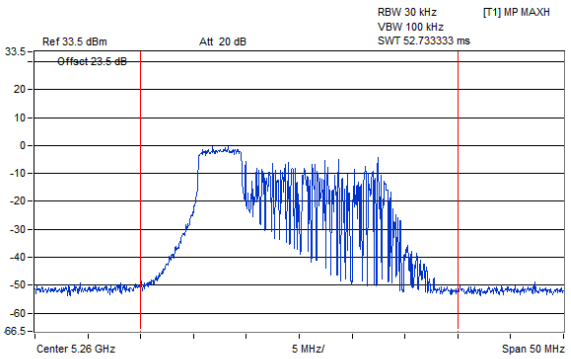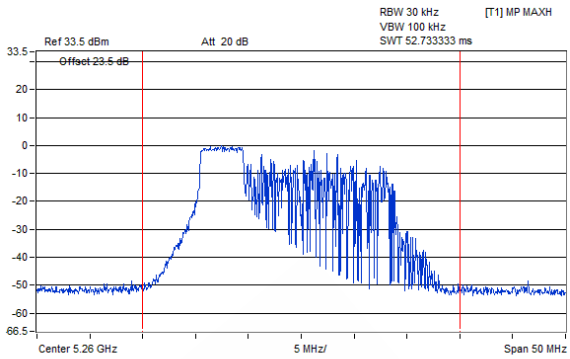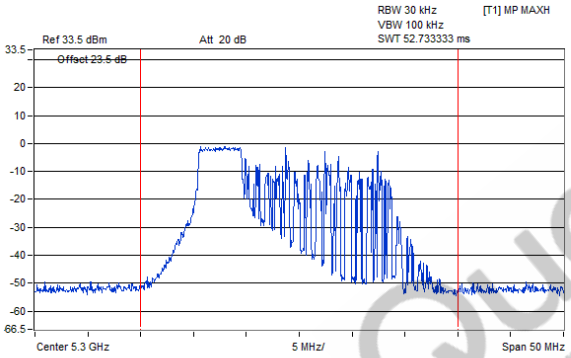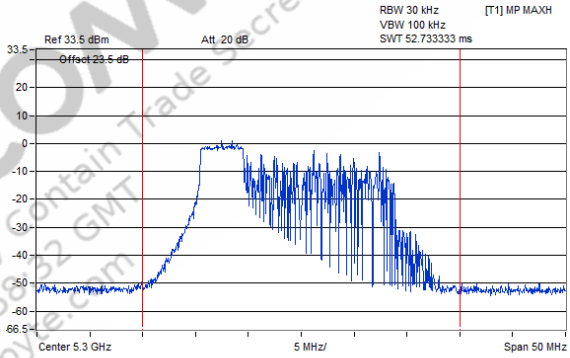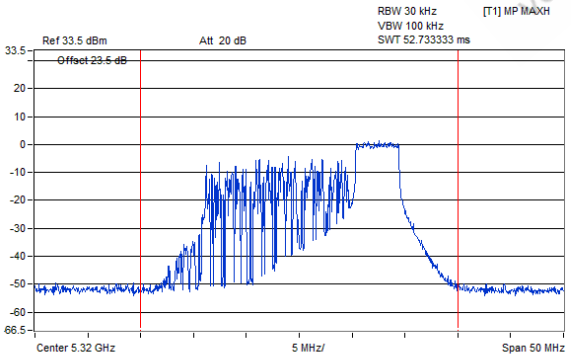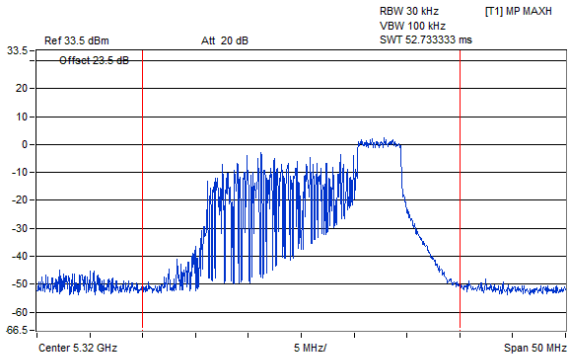Chain 0	Chain 1
CH 52	
	
TX Channel Bandwidth 30 MHz Power 20 dBm	TX Channel Bandwidth 30 MHz Power 21.01 dBm
CH 60	
	
TX Channel Bandwidth 30 MHz Power 20.08 dBm	TX Channel Bandwidth 30 MHz Power 20.92 dBm
CH 64	
	
TX Channel Bandwidth 30 MHz Power 21.58 dBm	TX Channel Bandwidth 30 MHz Power 22.26 dBm







QualComm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT

Power Plot

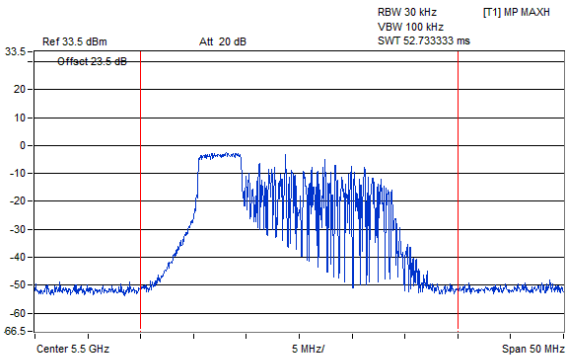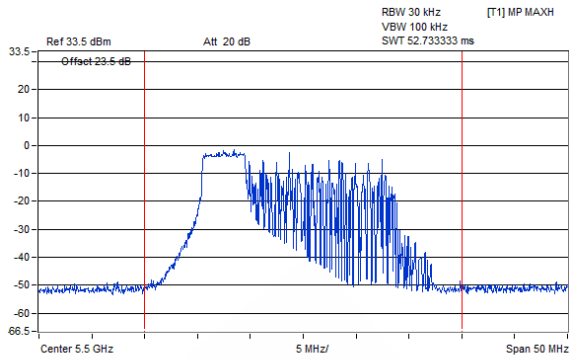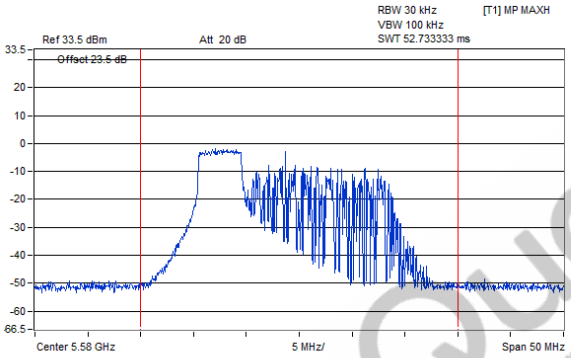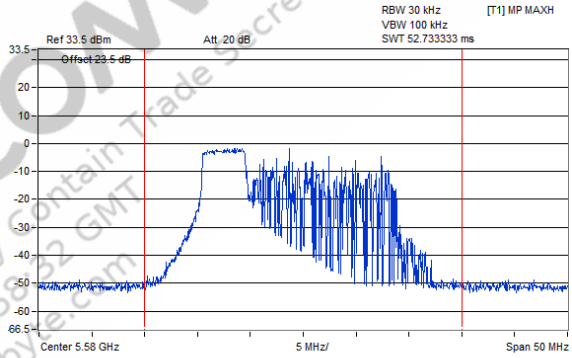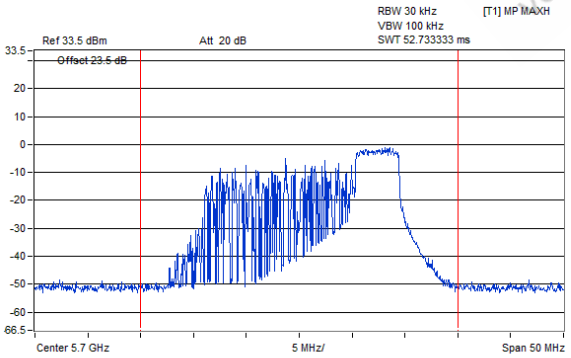
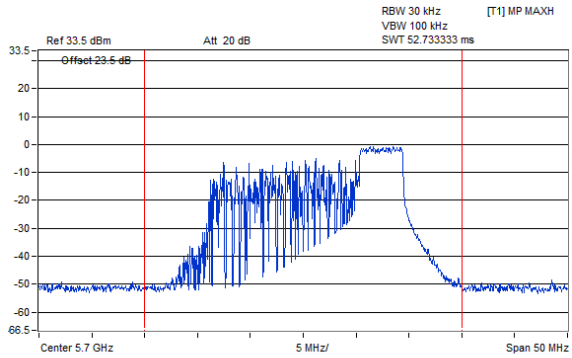
Chain 0	Chain 1
CH 100	
	
TX Channel Bandwidth 30 MHz Power 18.6 dBm	TX Channel Bandwidth 30 MHz Power 18.94 dBm
CH 116	
	
TX Channel Bandwidth 30 MHz Power 18.81 dBm	TX Channel Bandwidth 30 MHz Power 19.46 dBm
CH 140	
	
TX Channel Bandwidth 30 MHz Power 19.21 dBm	TX Channel Bandwidth 30 MHz Power 20.12 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT Vera Li Gigabyte.com

Power Plot

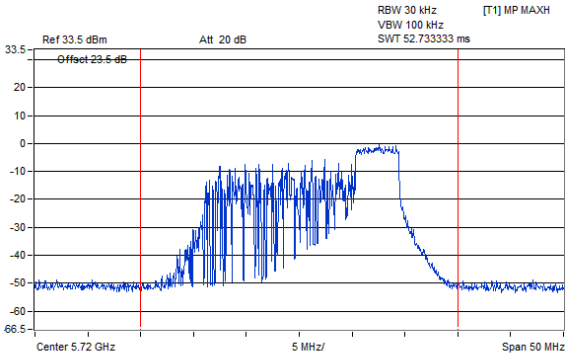
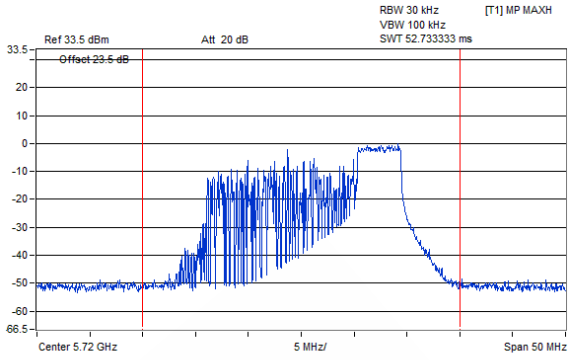
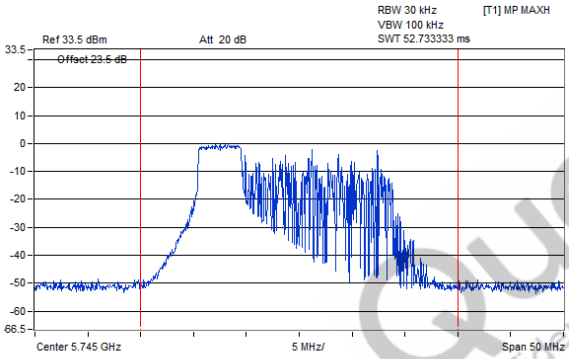
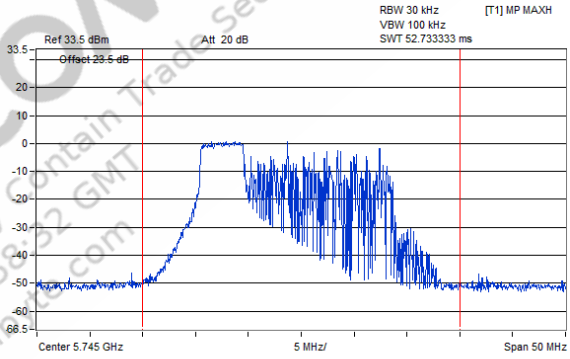
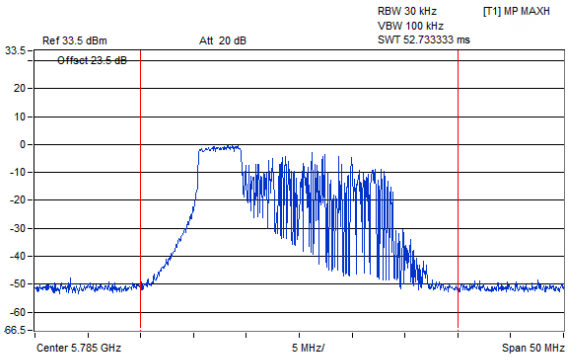
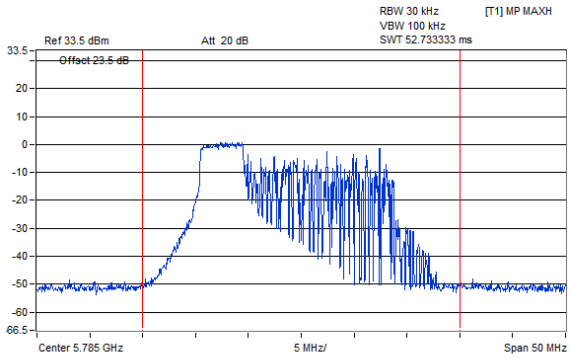
Chain 0	Chain 1
CH 144	
 TX Channel Bandwidth 30 MHz Power 19.42 dBm	 TX Channel Bandwidth 30 MHz Power 20.05 dBm
CH 149	
 TX Channel Bandwidth 30 MHz Power 20.86 dBm	 TX Channel Bandwidth 30 MHz Power 21.87 dBm
CH 157	
 TX Channel Bandwidth 30 MHz Power 20.78 dBm	 TX Channel Bandwidth 30 MHz Power 21.75 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.vinggianto@...

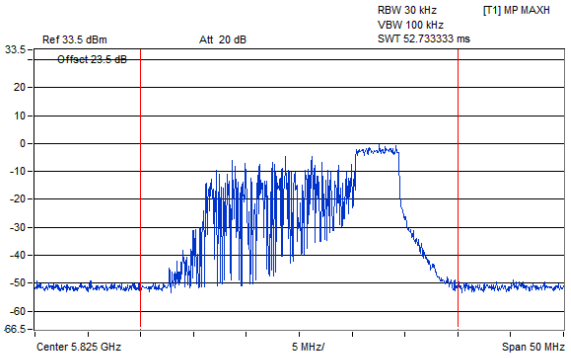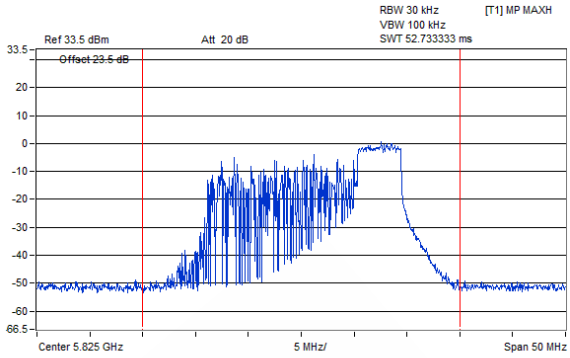Power Plot	
Chain 0	**Chain 1**
CH 165	
 TX Channel Bandwidth 30 MHz Power 19.38 dBm	 TX Channel Bandwidth 30 MHz Power 20.33 dBm







Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT20) 106-tone RU

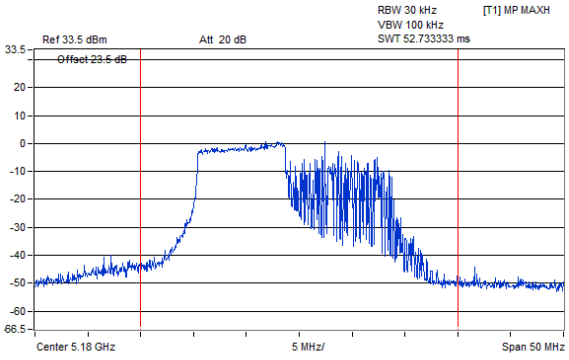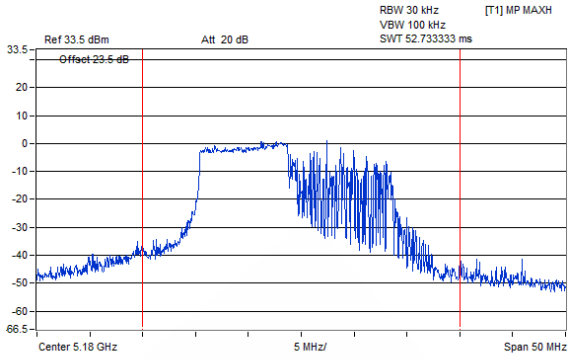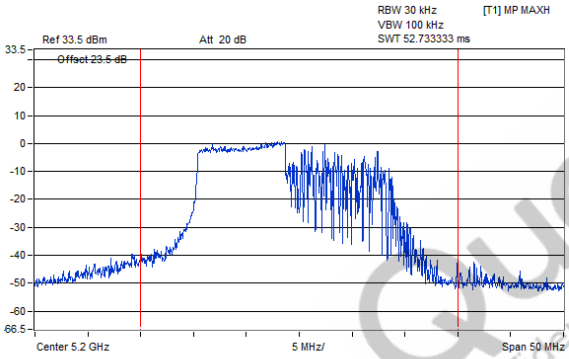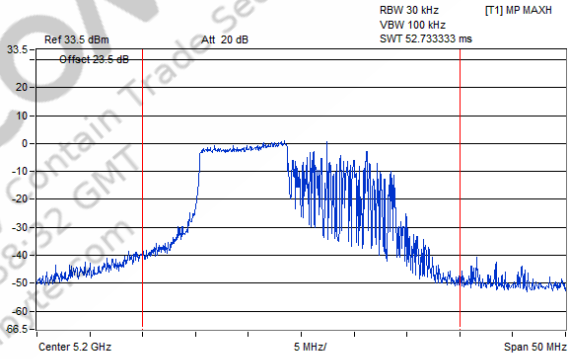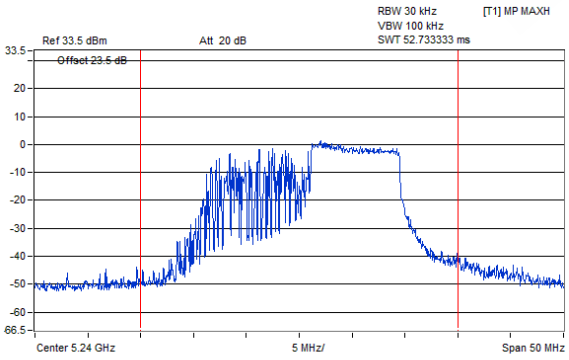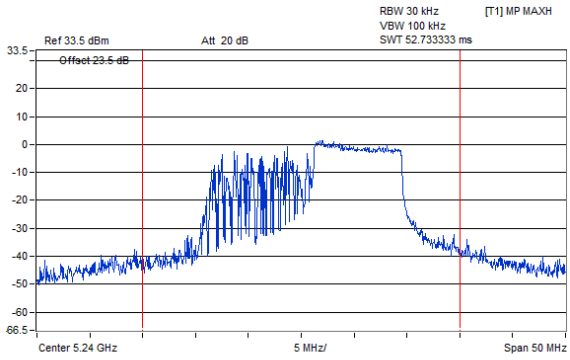Power Plot	
Chain 0	**Chain 1**
CH 36	
 TX Channel Bandwidth 30 MHz Power 22.99 dBm	 TX Channel Bandwidth 30 MHz Power 23.15 dBm
CH 40	
 TX Channel Bandwidth 30 MHz Power 23.37 dBm	 TX Channel Bandwidth 30 MHz Power 23.17 dBm
CH 48	
 TX Channel Bandwidth 30 MHz Power 23.27 dBm	 TX Channel Bandwidth 30 MHz Power 23.52 dBm







Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.vinggianto@...

Power Plot

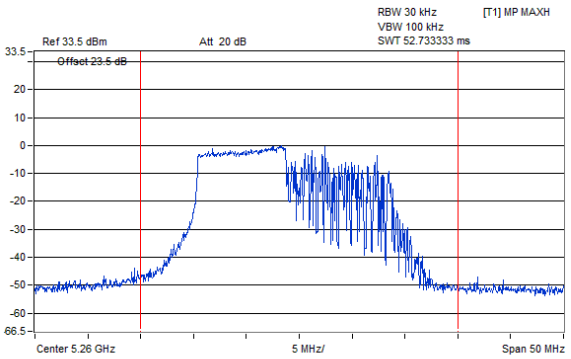
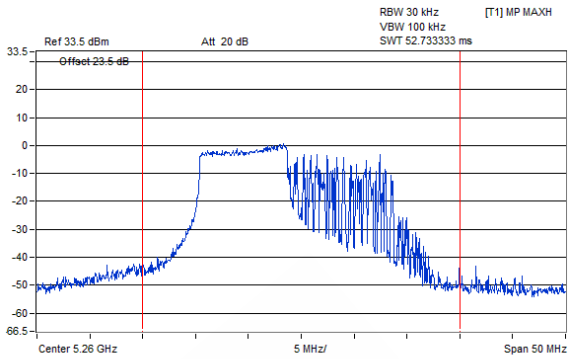
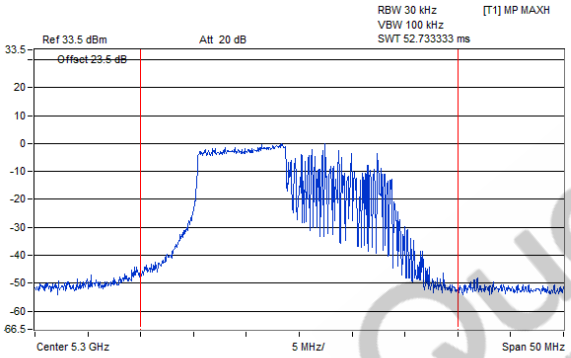
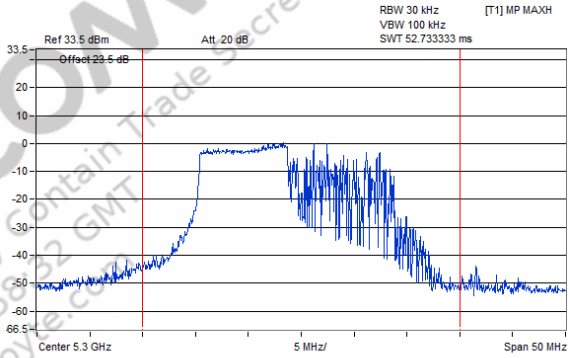
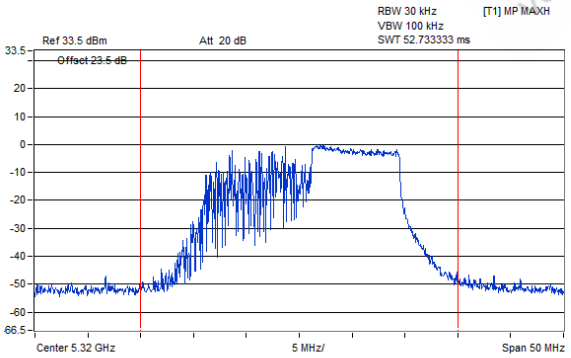
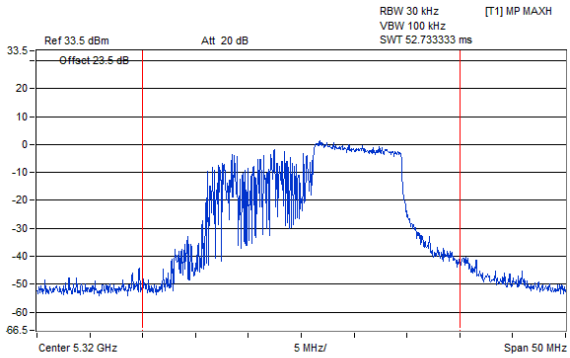
Chain 0	Chain 1
CH 52	
	
TX Channel Bandwidth 30 MHz Power 22.55 dBm	TX Channel Bandwidth 30 MHz Power 22.66 dBm
CH 60	
	
TX Channel Bandwidth 30 MHz Power 22.55 dBm	TX Channel Bandwidth 30 MHz Power 22.68 dBm
CH 64	
	
TX Channel Bandwidth 30 MHz Power 22.61 dBm	TX Channel Bandwidth 30 MHz Power 23.3 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT



Power Plot

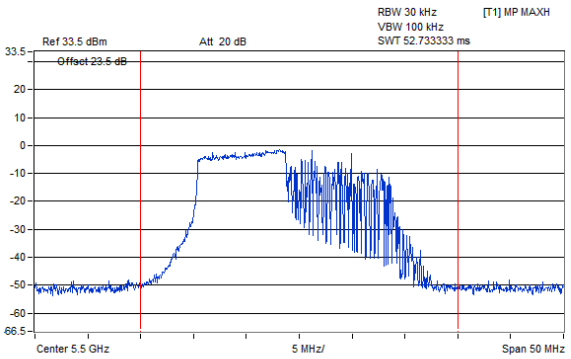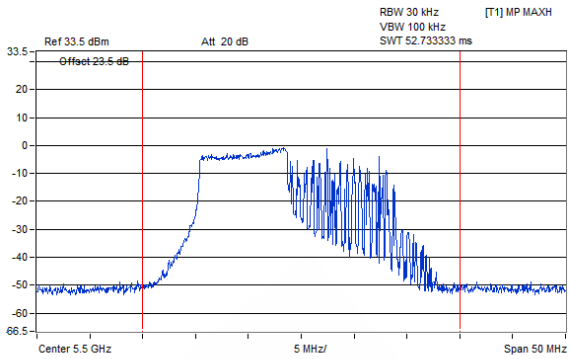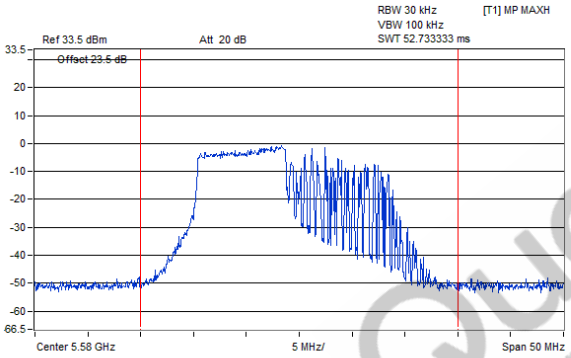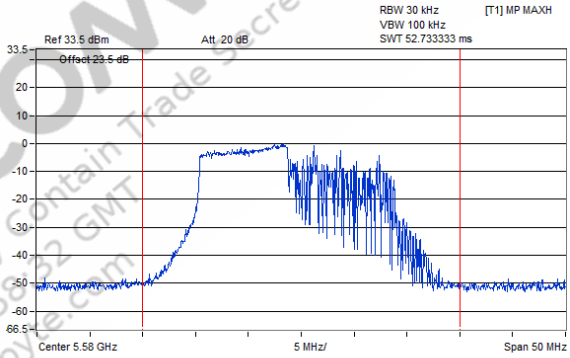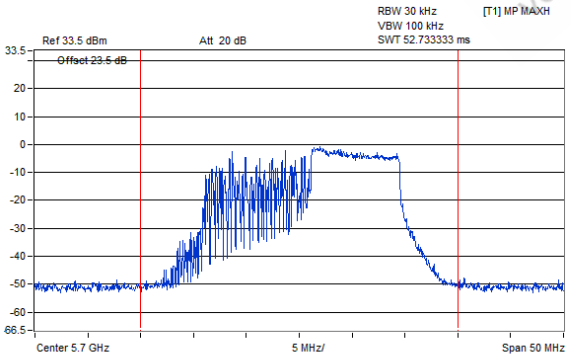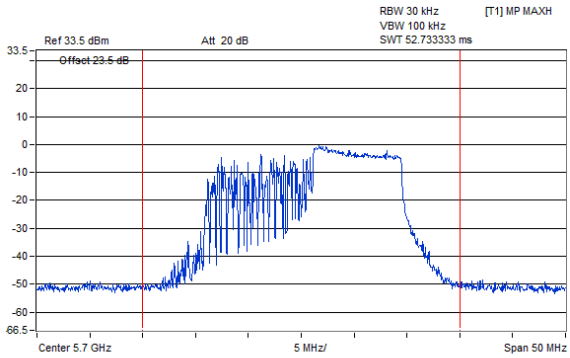Chain 0	Chain 1
CH 100	
	
TX Channel Bandwidth 30 MHz Power 21.38 dBm	TX Channel Bandwidth 30 MHz Power 21.35 dBm
CH 116	
	
TX Channel Bandwidth 30 MHz Power 21.6 dBm	TX Channel Bandwidth 30 MHz Power 22.25 dBm
CH 140	
	
TX Channel Bandwidth 30 MHz Power 21.41 dBm	TX Channel Bandwidth 30 MHz Power 21.61 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT

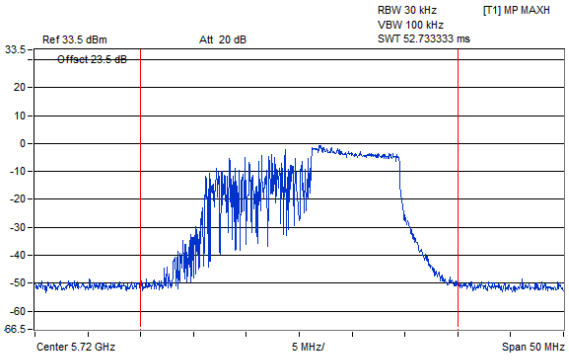
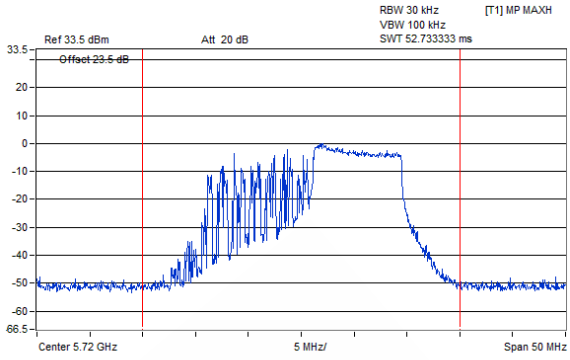
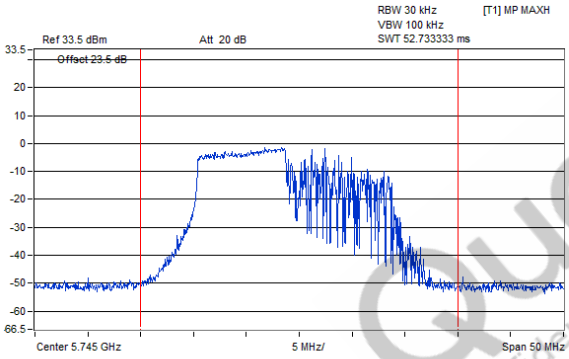
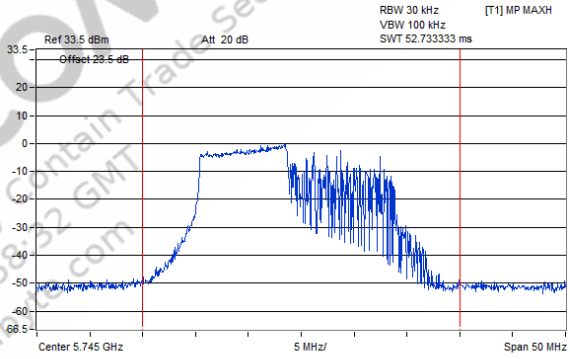
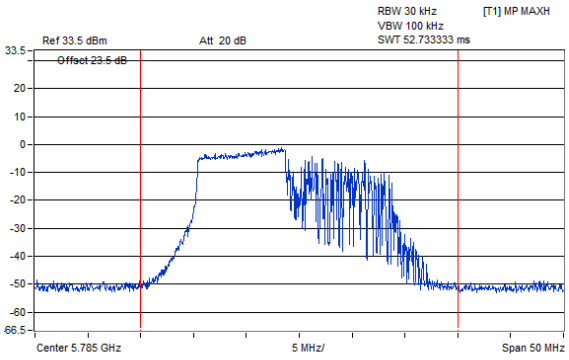
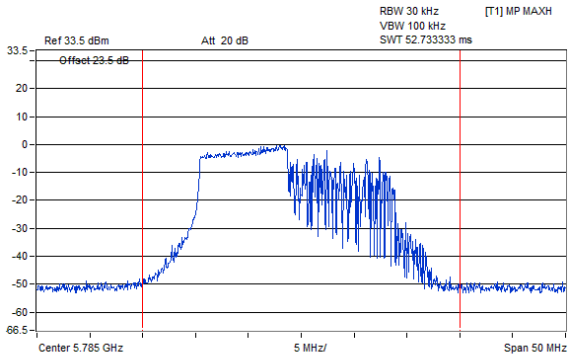
Power Plot	
Chain 0	**Chain 1**
CH 144	
 TX Channel Bandwidth 30 MHz Power 21.37 dBm	 TX Channel Bandwidth 30 MHz Power 21.62 dBm
CH 149	
 TX Channel Bandwidth 30 MHz Power 21.3 dBm	 TX Channel Bandwidth 30 MHz Power 21.89 dBm
CH 157	
 TX Channel Bandwidth 30 MHz Power 21.2 dBm	 TX Channel Bandwidth 30 MHz Power 21.95 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.viggiani@tte.com

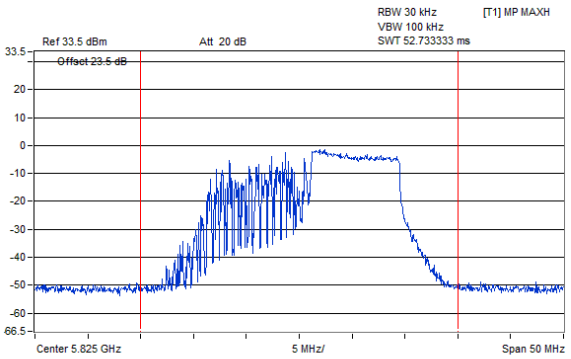
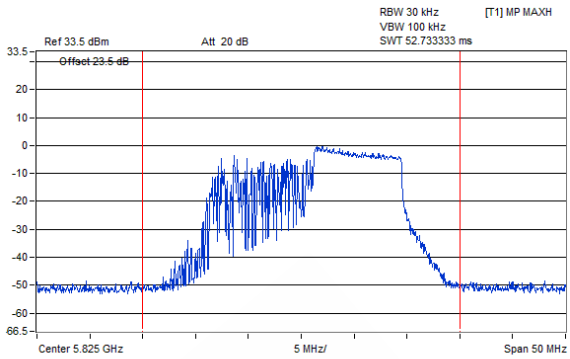
Power Plot	
Chain 0	**Chain 1**
CH 165	
 TX Channel Bandwidth 30 MHz Power 20.9 dBm	 TX Channel Bandwidth 30 MHz Power 21.83 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT20) 242-tone RU

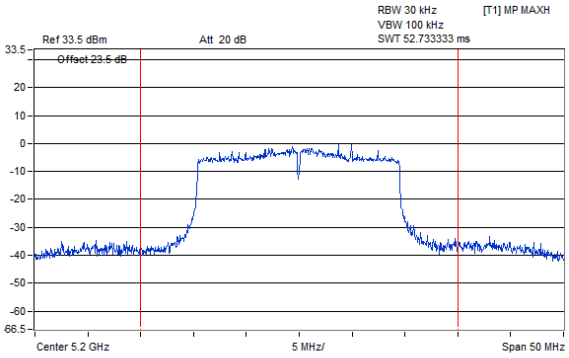
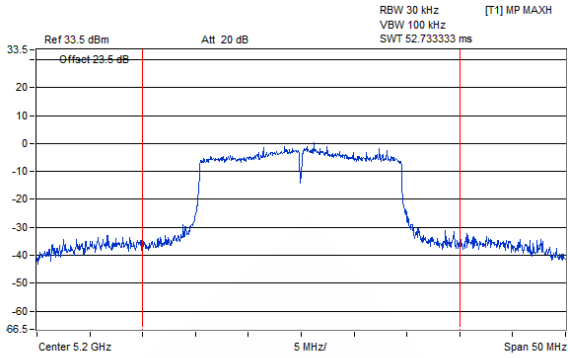
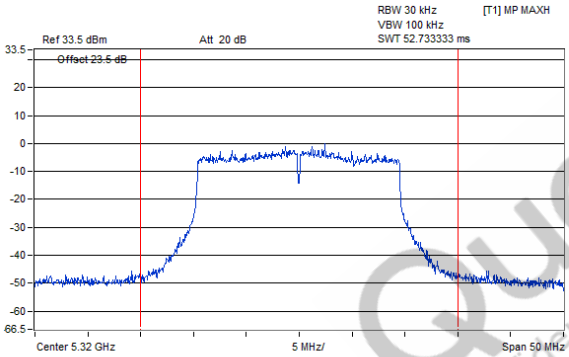
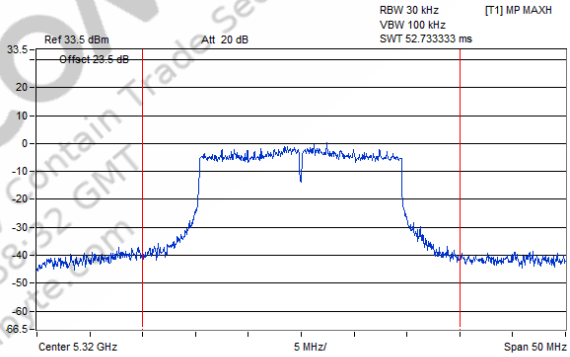
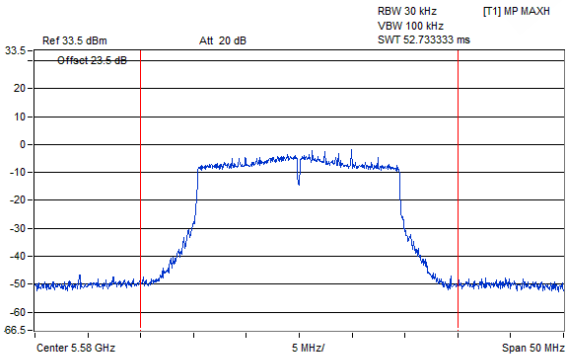
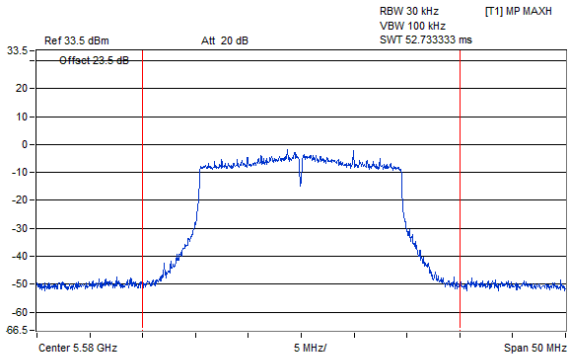
Power Plot	
Chain 0	**Chain 1**
CH 40	
 TX Channel Bandwidth 30 MHz Power 23.23 dBm	 TX Channel Bandwidth 30 MHz Power 23.37 dBm
CH 64	
 TX Channel Bandwidth 30 MHz Power 22.93 dBm	 TX Channel Bandwidth 30 MHz Power 23.73 dBm
CH 116	
 TX Channel Bandwidth 30 MHz Power 21.19 dBm	 TX Channel Bandwidth 30 MHz Power 21.3 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.viggiani@...

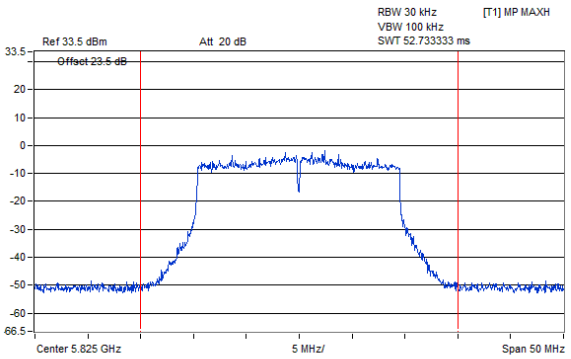
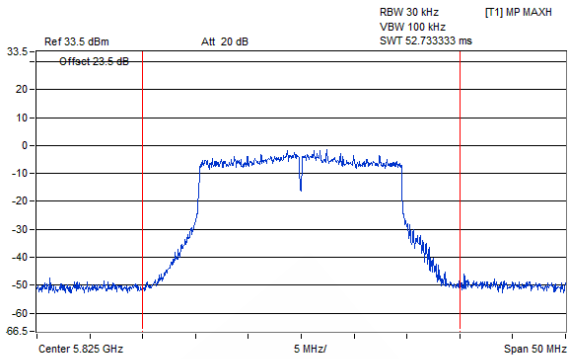
Power Plot	
Chain 0	**Chain 1**
CH 165	
 TX Channel Bandwidth 30 MHz Power 21.36 dBm	 TX Channel Bandwidth 30 MHz Power 22.27 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT40) 484-tone RU

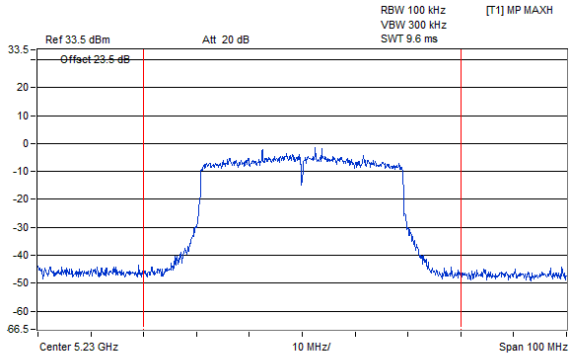
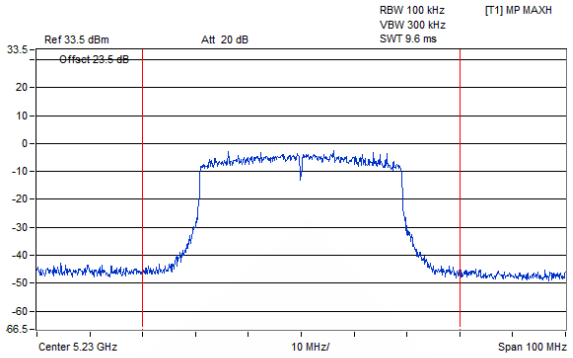
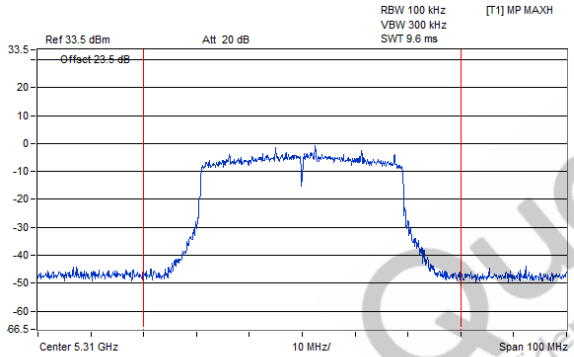
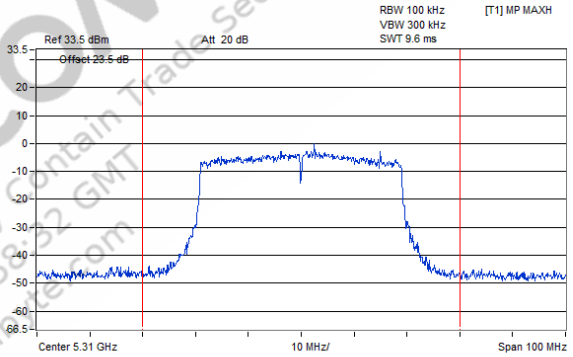
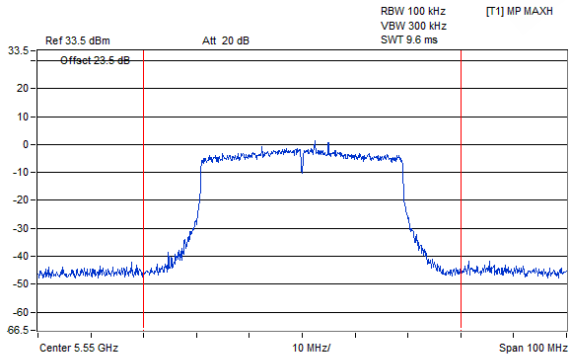
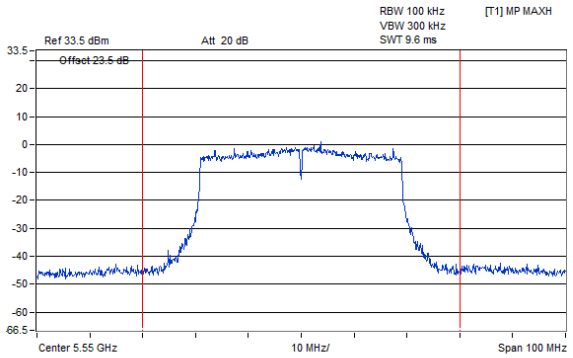
Power Plot	
Chain 0	**Chain 1**
CH 46	
 TX Channel Bandwidth 60 MHz Power 19.19 dBm	 TX Channel Bandwidth 60 MHz Power 19.67 dBm
CH 62	
 TX Channel Bandwidth 60 MHz Power 19.76 dBm	 TX Channel Bandwidth 60 MHz Power 20.06 dBm
CH 110	
 TX Channel Bandwidth 60 MHz Power 21.83 dBm	 TX Channel Bandwidth 60 MHz Power 22.06 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.viggiani@te.com

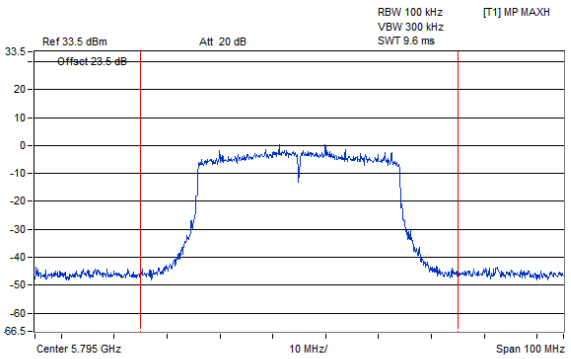
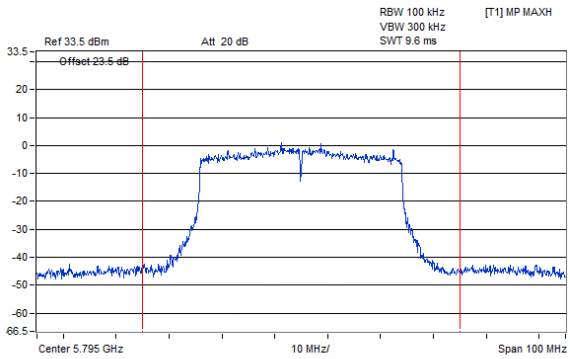
Power Plot	
Chain 0	**Chain 1**
CH 159	
 TX Channel Bandwidth 60 MHz Power 21.45 dBm	 TX Channel Bandwidth 60 MHz Power 22.16 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com





802.11be (EHT80) 996-tone RU

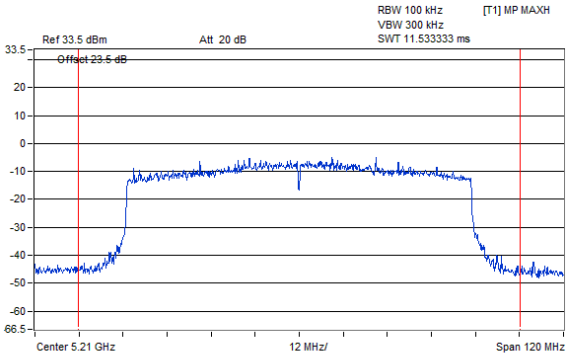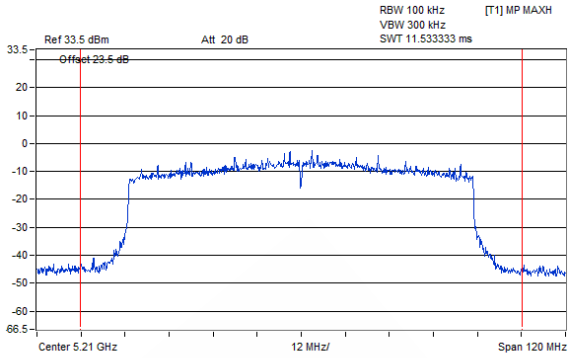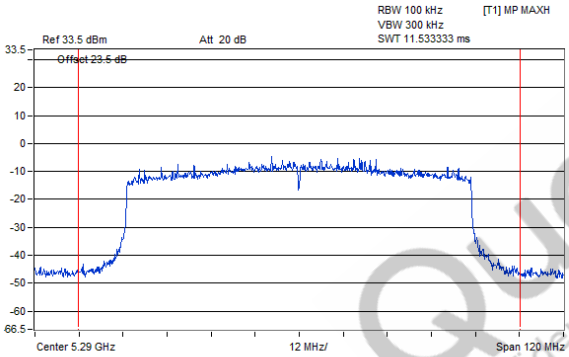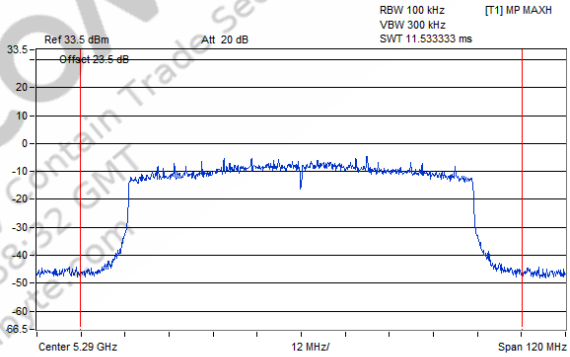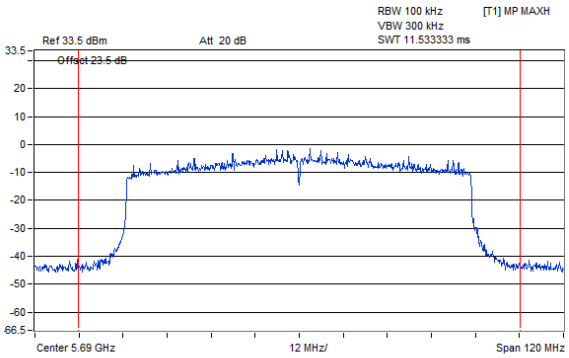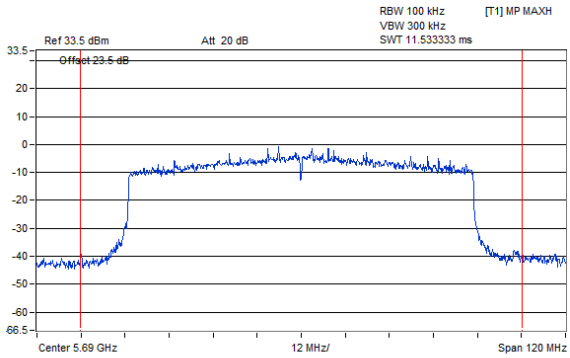Power Plot	
Chain 0	**Chain 1**
CH 42	
 TX Channel Bandwidth 100 MHz Power 19.14 dBm	 TX Channel Bandwidth 100 MHz Power 19.67 dBm
CH 58	
 TX Channel Bandwidth 100 MHz Power 18.74 dBm	 TX Channel Bandwidth 100 MHz Power 19.15 dBm
CH 137	
 TX Channel Bandwidth 100 MHz Power 21.4 dBm	 TX Channel Bandwidth 100 MHz Power 21.89 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.viggiani@tuv.com





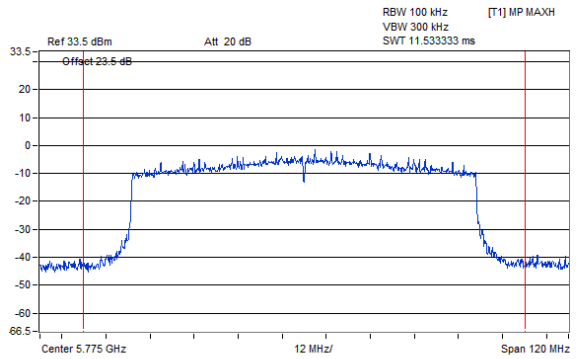
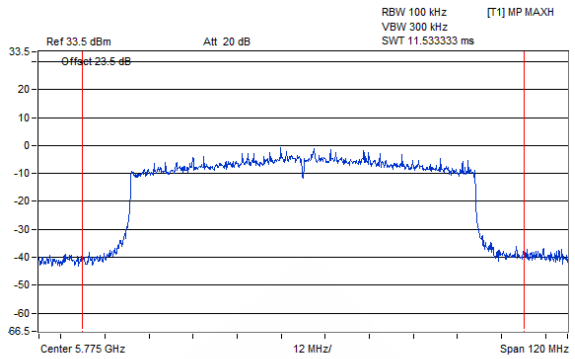
Power Plot	
Chain 0	**Chain 1**
CH 155	
 TX Channel Bandwidth 100 MHz Power 21.47 dBm	 TX Channel Bandwidth 100 MHz Power 22.07 dBm

802.11be (EHT160) 2x996-tone RU

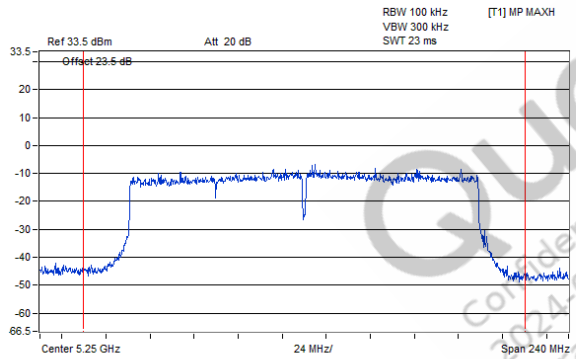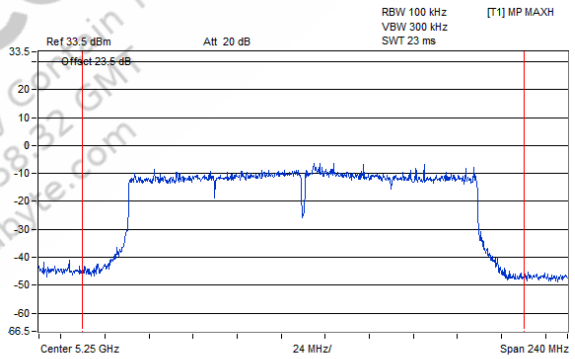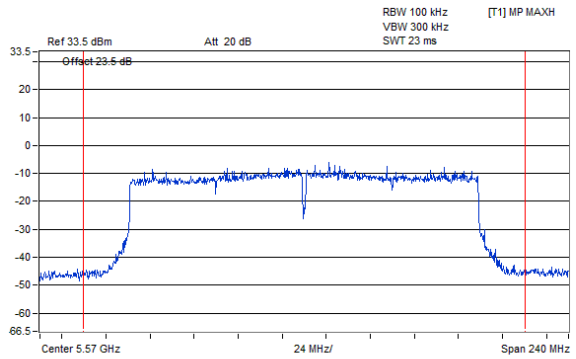
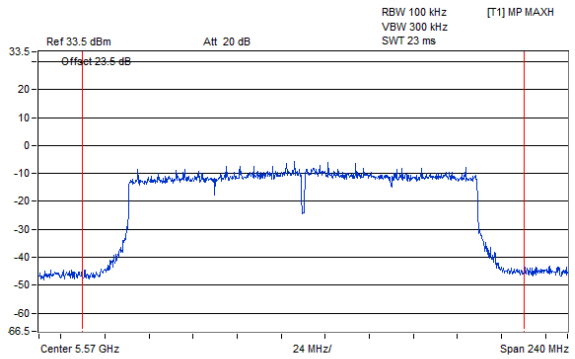
Power Plot	
Chain 0	**Chain 1**
CH 50	
 TX Channel Bandwidth 200 MHz Power 20.07 dBm	 TX Channel Bandwidth 200 MHz Power 20.62 dBm
CH 114	
 TX Channel Bandwidth 200 MHz Power 20.34 dBm	 TX Channel Bandwidth 200 MHz Power 20.72 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigavie.com

802.11be (EHT20) 52+26-tone MRU

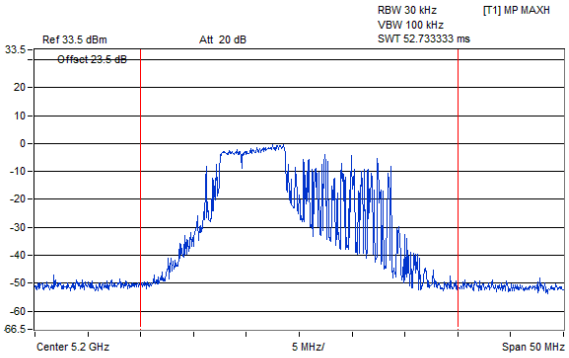
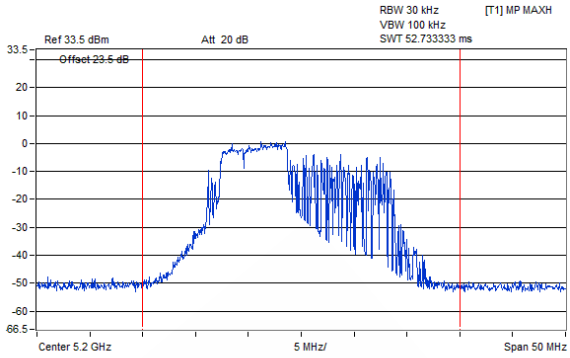
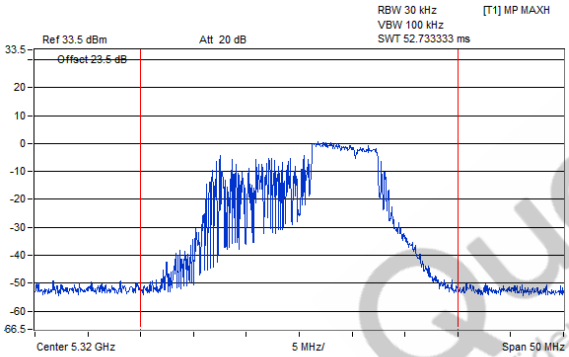
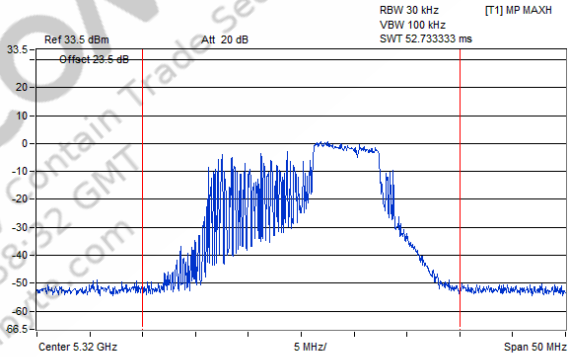
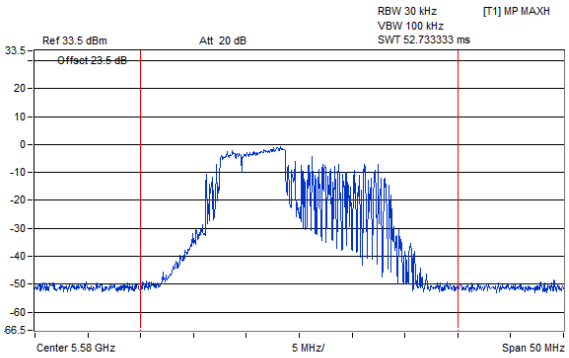
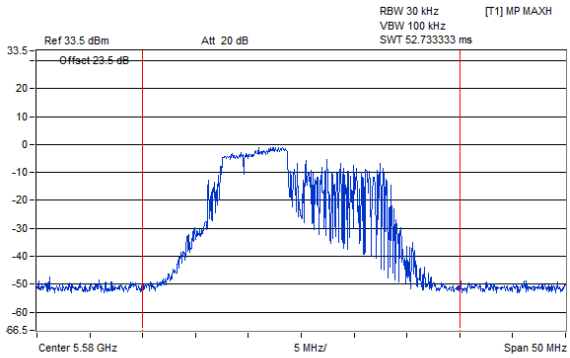
Power Plot	
Chain 0	**Chain 1**
CH 40	
 TX Channel Bandwidth 30 MHz Power 20.97 dBm	 TX Channel Bandwidth 30 MHz Power 21.79 dBm
CH 64	
 TX Channel Bandwidth 30 MHz Power 22.11 dBm	 TX Channel Bandwidth 30 MHz Power 22 dBm
CH 116	
 TX Channel Bandwidth 30 MHz Power 20.59 dBm	 TX Channel Bandwidth 30 MHz Power 20.53 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.wang@qti.qualcomm.com

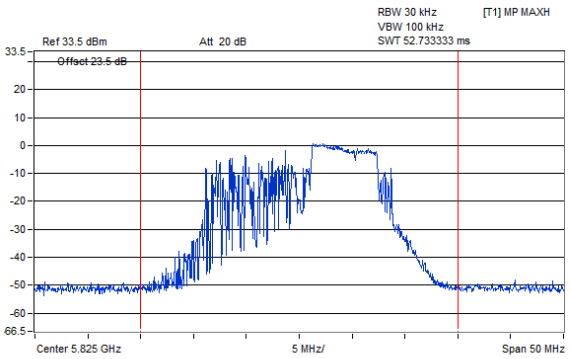
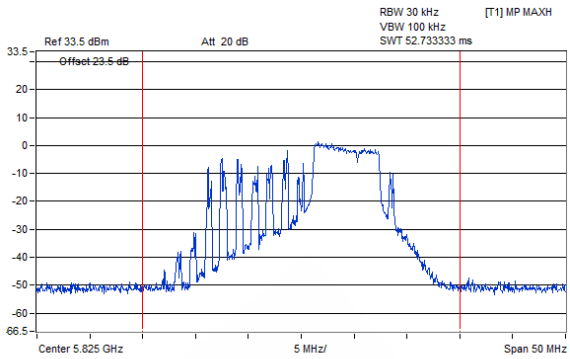
Power Plot	
Chain 0	**Chain 1**
CH 165	
 TX Channel Bandwidth 30 MHz Power 22.25 dBm	 TX Channel Bandwidth 30 MHz Power 21.94 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT20) 106+26-tone MRU

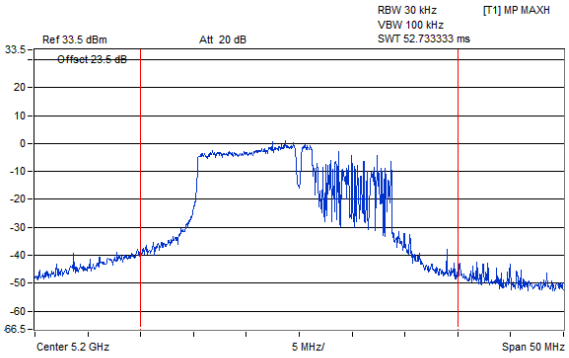
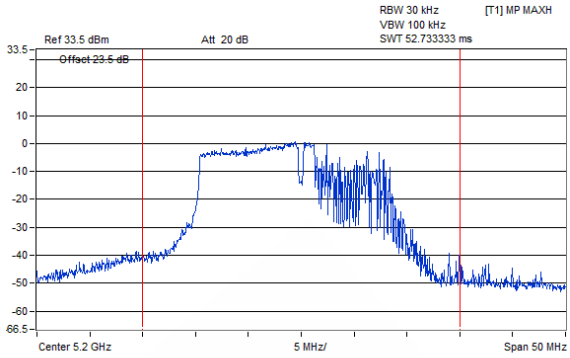
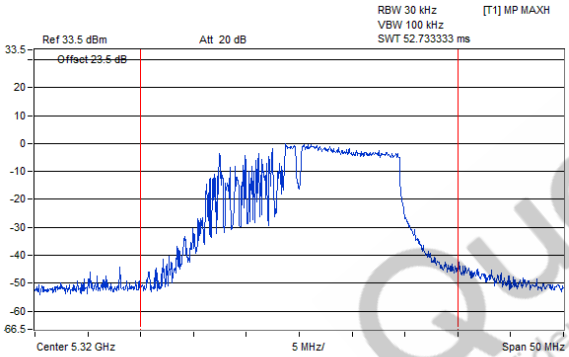
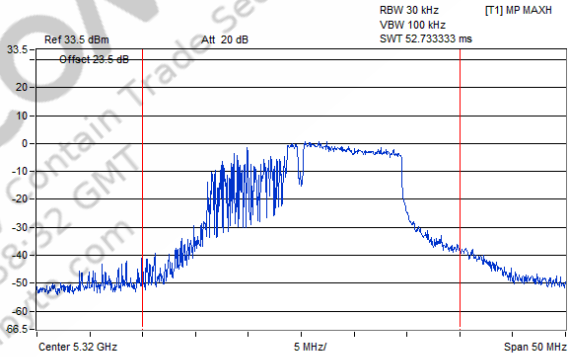
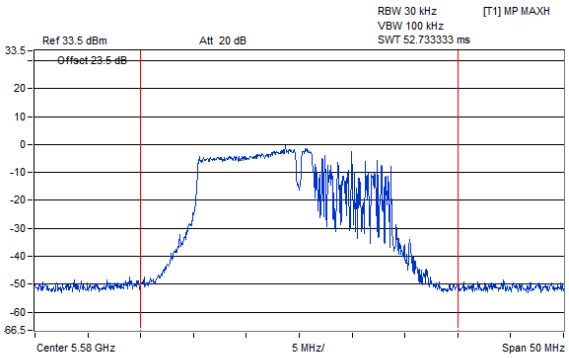
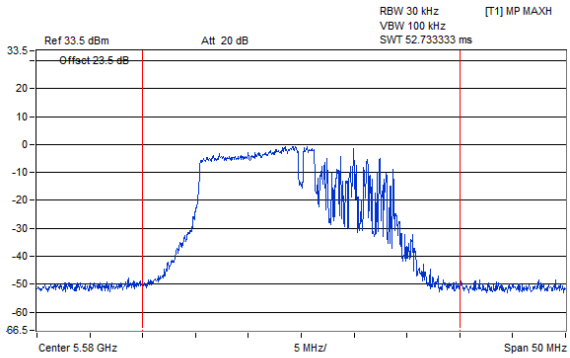
Power Plot	
Chain 0	**Chain 1**
CH 40	
 TX Channel Bandwidth 30 MHz Power 22.86 dBm	 TX Channel Bandwidth 30 MHz Power 23.33 dBm
CH 64	
 TX Channel Bandwidth 30 MHz Power 22.96 dBm	 TX Channel Bandwidth 30 MHz Power 23.57 dBm
CH 116	
 TX Channel Bandwidth 30 MHz Power 21.64 dBm	 TX Channel Bandwidth 30 MHz Power 22.1 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.viggiano@...com

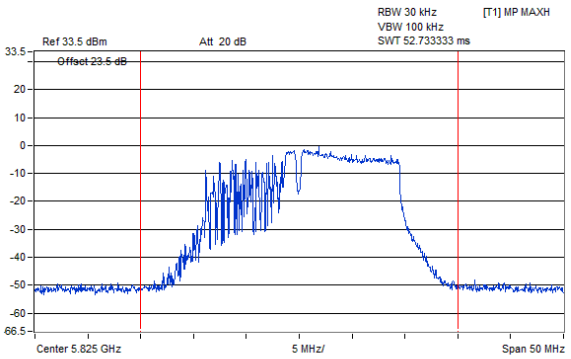
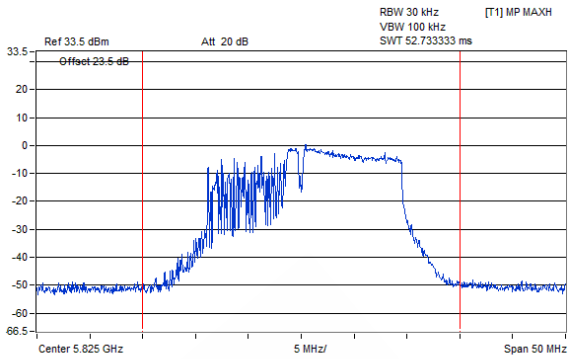
Power Plot	
Chain 0	**Chain 1**
CH 165	
 TX Channel Bandwidth 30 MHz Power 21.56 dBm	 TX Channel Bandwidth 30 MHz Power 22.26 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com





802.11be (EHT80) 484+242-tone MRU

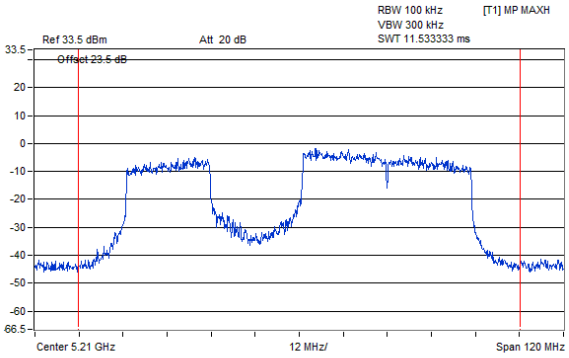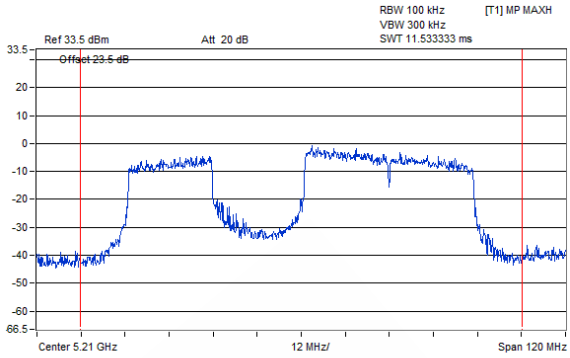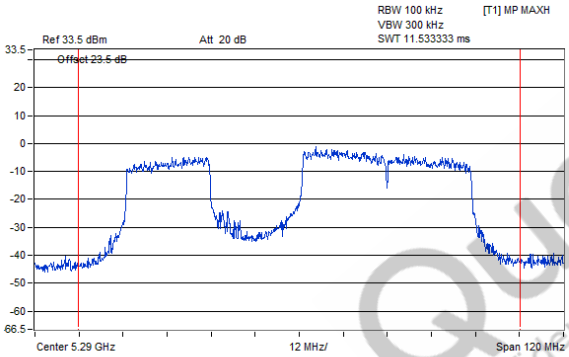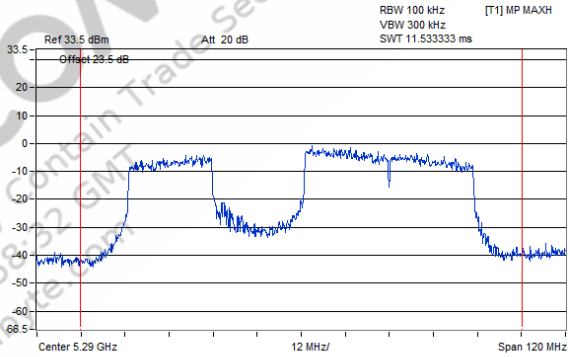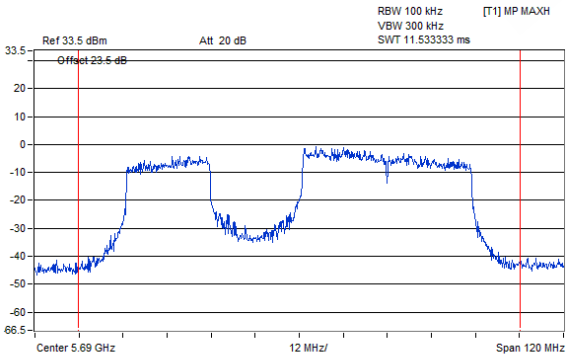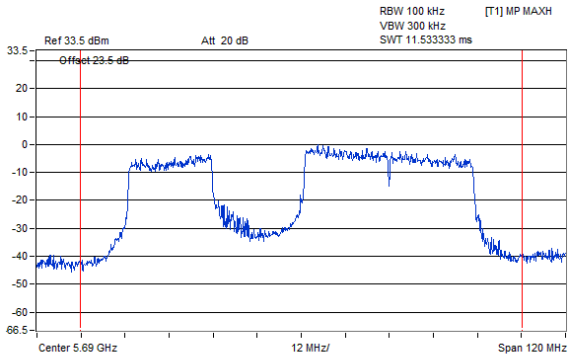Power Plot	
Chain 0	**Chain 1**
CH 42	
 TX Channel Bandwidth 100 MHz Power 20.76 dBm	 TX Channel Bandwidth 100 MHz Power 21.34 dBm
CH 58	
 TX Channel Bandwidth 100 MHz Power 21.28 dBm	 TX Channel Bandwidth 100 MHz Power 21.74 dBm
CH 138	
 TX Channel Bandwidth 100 MHz Power 21.7 dBm	 TX Channel Bandwidth 100 MHz Power 22.3 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.viggiano@bv.com





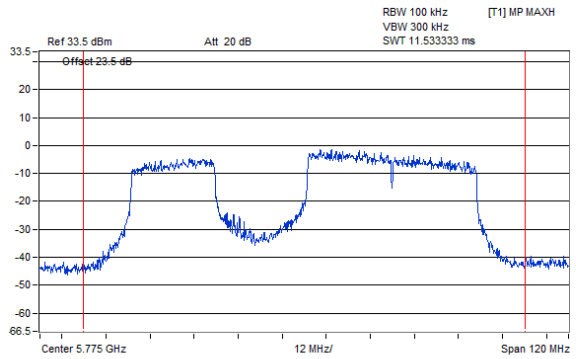
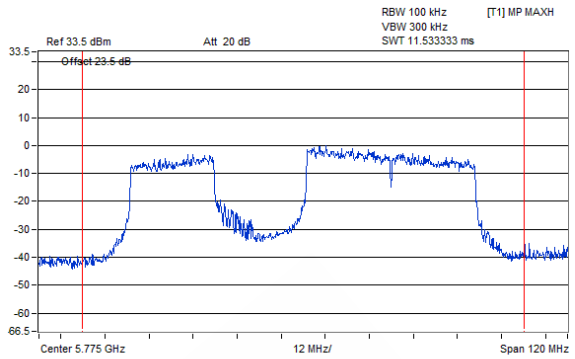
Power Plot	
Chain 0	**Chain 1**
CH 155	
 TX Channel Bandwidth 100 MHz Power 21.65 dBm	 TX Channel Bandwidth 100 MHz Power 22.38 dBm

802.11be (EHT160) 996+484-tone MRU

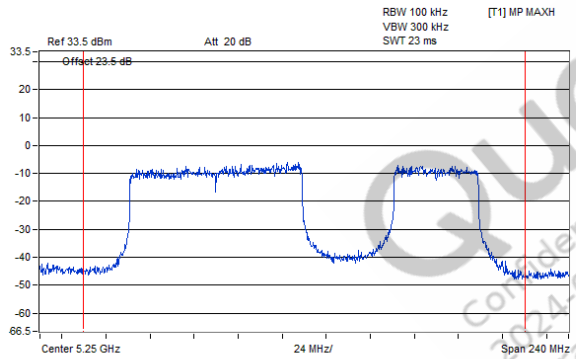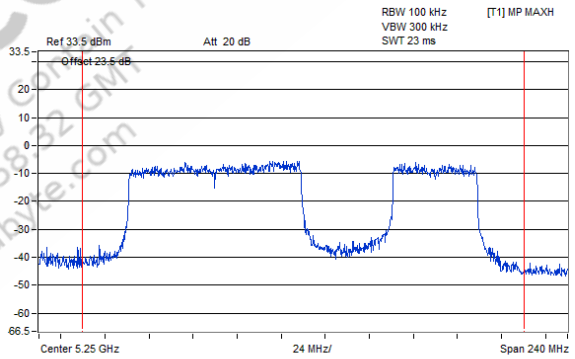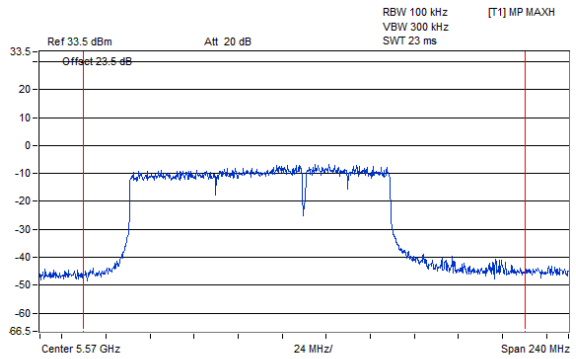
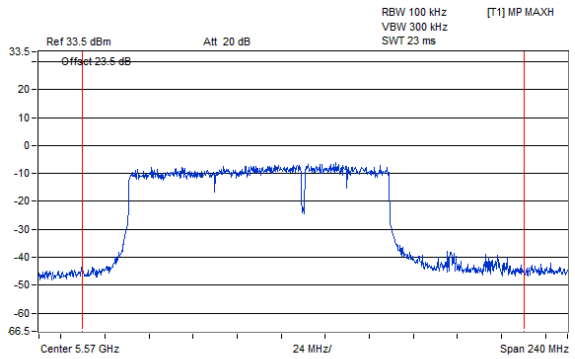
Power Plot	
Chain 0	**Chain 1**
CH 50	
 TX Channel Bandwidth 200 MHz Power 21.11 dBm	 TX Channel Bandwidth 200 MHz Power 21.81 dBm
CH 114	
 TX Channel Bandwidth 200 MHz Power 20.65 dBm	 TX Channel Bandwidth 200 MHz Power 21.17 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com





802.11be (EHT80) Punctured by 20 MHz

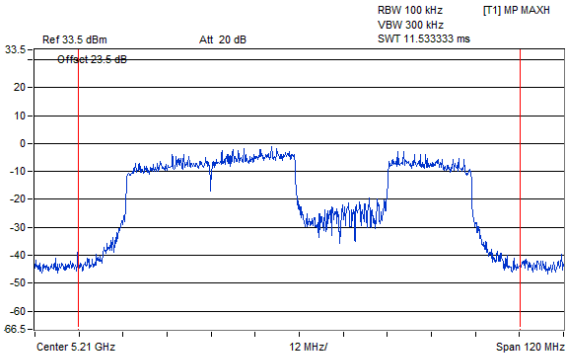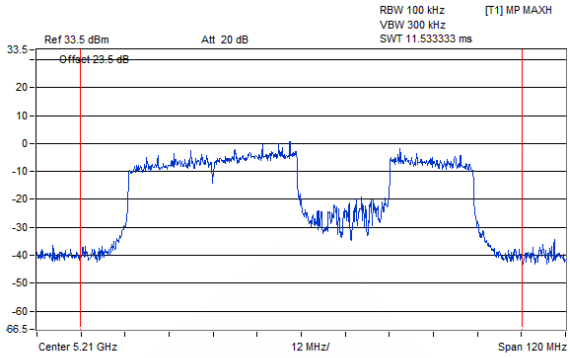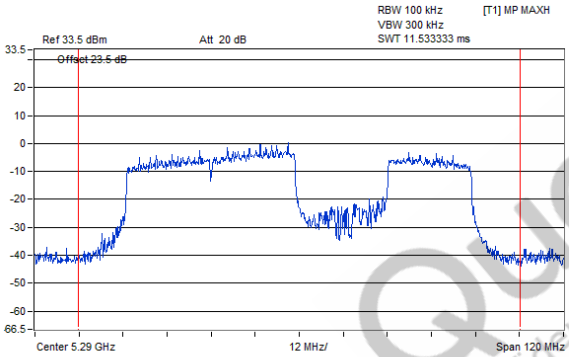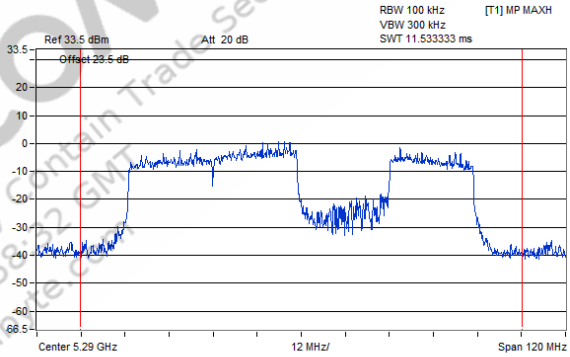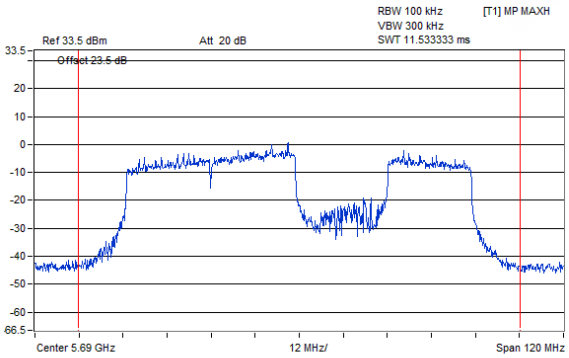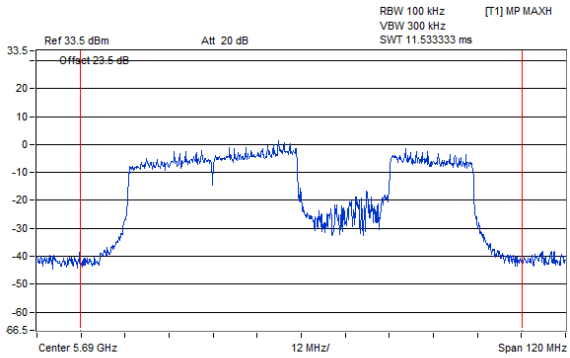Power Plot	
Chain 0	**Chain 1**
CH 42	
 TX Channel Bandwidth 100 MHz Power 20.79 dBm	 TX Channel Bandwidth 100 MHz Power 21.28 dBm
CH 58	
 TX Channel Bandwidth 100 MHz Power 21.52 dBm	 TX Channel Bandwidth 100 MHz Power 22.06 dBm
CH 138	
 TX Channel Bandwidth 100 MHz Power 21.49 dBm	 TX Channel Bandwidth 100 MHz Power 22.36 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.vinggianite.com



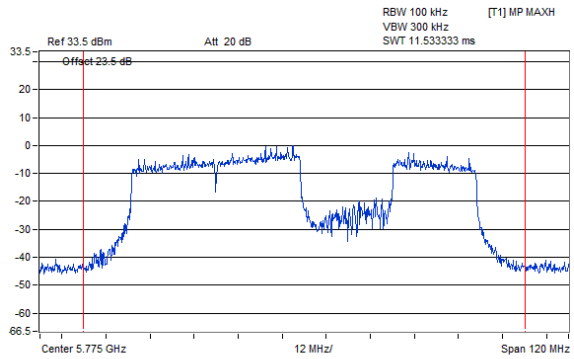
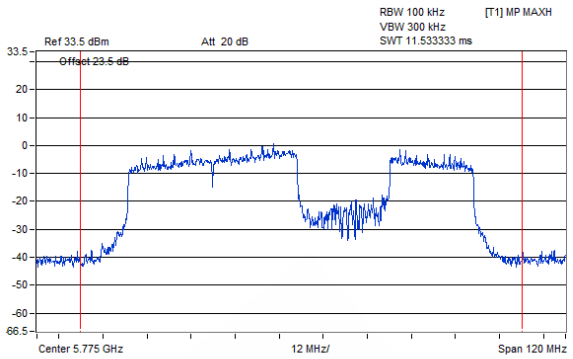
Power Plot	
Chain 0	**Chain 1**
CH 155	
 TX Channel Bandwidth 100 MHz Power 21.19 dBm	 TX Channel Bandwidth 100 MHz Power 21.96 dBm

802.11be (EHT160) Punctured by 20 MHz

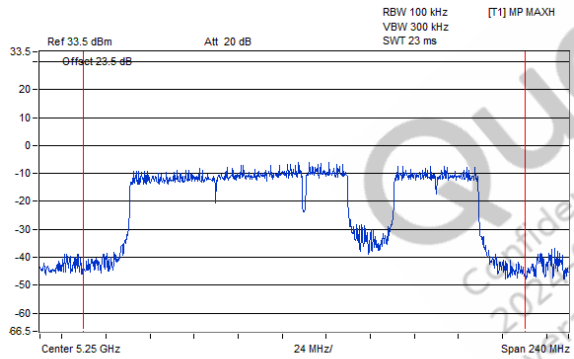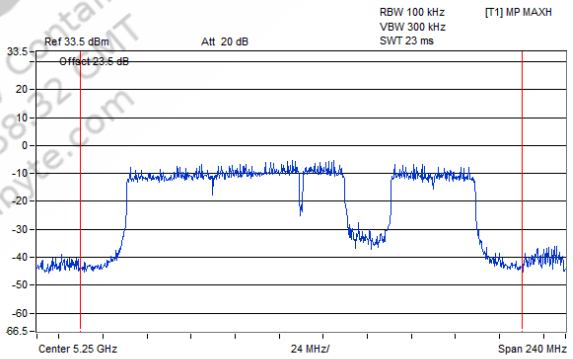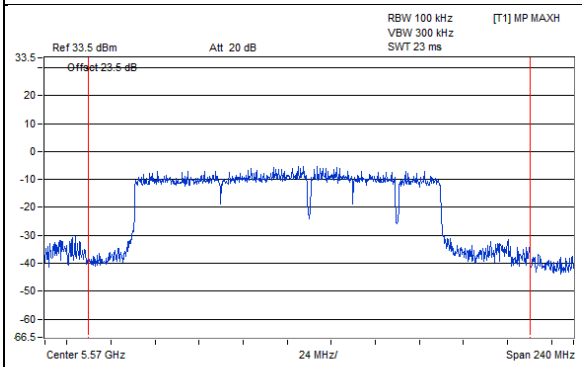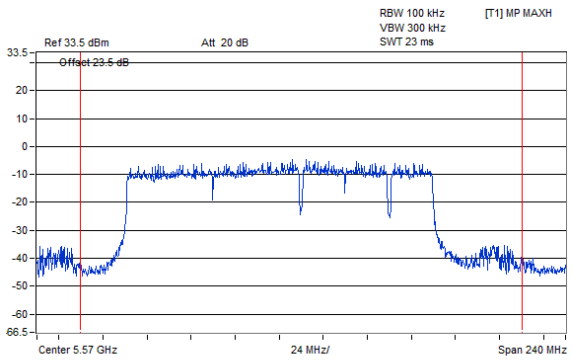Power Plot	
Chain 0	**Chain 1**
CH 50	
 TX Channel Bandwidth 200 MHz Power 20.42 dBm	 TX Channel Bandwidth 200 MHz Power 21.06 dBm
CH 114	
 TX Channel Bandwidth 200 MHz Power 21.43 dBm	 TX Channel Bandwidth 200 MHz Power 22.01 dBm

Qualcomm Confidential - May Contain Trade Secrets 2022-06-25 00:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT160) Punctured by 40 MHz

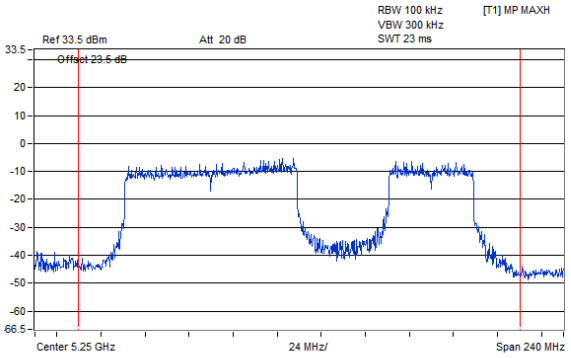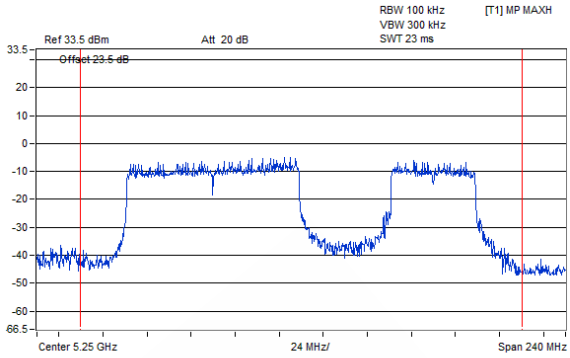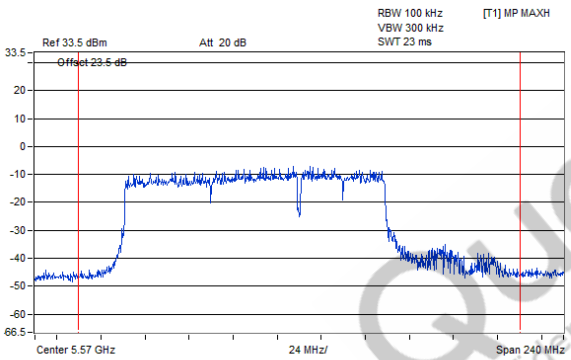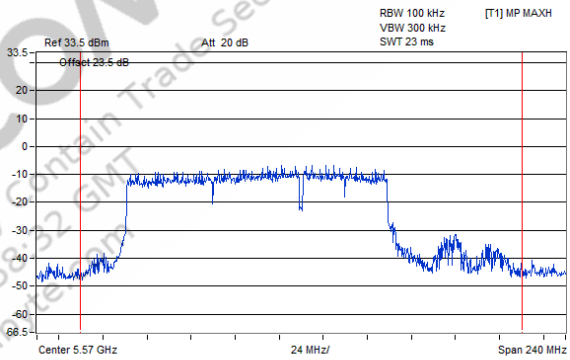Power Plot	
Chain 0	**Chain 1**
CH 50	
 TX Channel Bandwidth 200 MHz Power 20.39 dBm	 TX Channel Bandwidth 200 MHz Power 20.88 dBm
CH 114	
 TX Channel Bandwidth 200 MHz Power 19.06 dBm	 TX Channel Bandwidth 200 MHz Power 19.32 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.viggiani@bureauveritas.com







Mode C

Composite Antenna Gain Type	Frequency Range	Chain0 (dBi)	Chain1 (dBi)	Directional Gain (dBi)	Certification Power
Uncorrelated	5150 ~ 5250 MHz:	3.35	3.35	3.35	S.A. Peak Power
	5250 ~ 5350 MHz:	3.42	3.35	3.39	
	5470 ~ 5725 MHz:	4.81	3.35	4.14	

Mode	Channel	Frequency (MHz)	Conducted (dBm)			EIRP			Pass / Fail
			Chain0	Chain1	Total Power				
			Peak	Peak	Peak	Value (dBm)	Value (mW)	Limit (mW)	
802.11be (EHT20) 26-tone RU	36	5180	17.29	18.07	20.71	24.06	254.683	1000	Pass
	40	5200	17.65	18.05	20.86	24.21	263.633	1000	Pass
	48	5240	17.86	17.82	20.85	24.2	263.027	1000	Pass
	52	5260	17.57	18.00	20.80	24.19	262.422	1000	Pass
	60	5300	17.63	18.22	20.95	24.34	271.644	1000	Pass
	64	5320	18.10	18.46	21.29	24.68	293.765	1000	Pass
	100	5500	17.44	17.57	20.52	24.66	292.415	1000	Pass
	116	5580	17.93	18.28	21.12	25.26	335.738	1000	Pass
	140	5700	17.44	15.74	19.68	23.82	240.991	1000	Pass
	144	5720	17.50	18.14	20.84	24.98	314.775	1000	Pass
802.11be (EHT20) 52-tone RU	36	5180	20.97	21.30	24.15	27.5	562.341	1000	Pass
	40	5200	20.80	21.42	24.13	27.48	559.758	1000	Pass
	48	5240	21.49	21.98	24.75	28.1	645.654	1000	Pass
	52	5260	20.94	21.70	24.35	27.74	594.292	1000	Pass
	60	5300	20.96	21.38	24.19	27.58	572.796	1000	Pass
	64	5320	21.40	22.30	24.88	28.27	671.429	1000	Pass
	100	5500	20.91	20.74	23.84	27.98	628.058	1000	Pass
	116	5580	21.29	21.59	24.45	28.59	722.77	1000	Pass
	140	5700	21.92	22.09	25.02	29.16	824.138	1000	Pass
	144	5720	22.00	22.35	25.19	29.33	857.038	1000	Pass
802.11be (EHT20) 52+26-tone MRU	40	5200	21.58	22.21	24.92	28.27	671.429	1000	Pass
	64	5320	21.89	22.64	25.29	28.68	737.904	1000	Pass
	116	5580	22.14	22.65	25.41	29.55	901.571	1000	Pass







Qualcomm Confidential - May Contain Trade Secrets
2021-06-25 00:21:32 GMT yuea.yu@gigastate.com

802.11be (EHT20) 26-tone RU

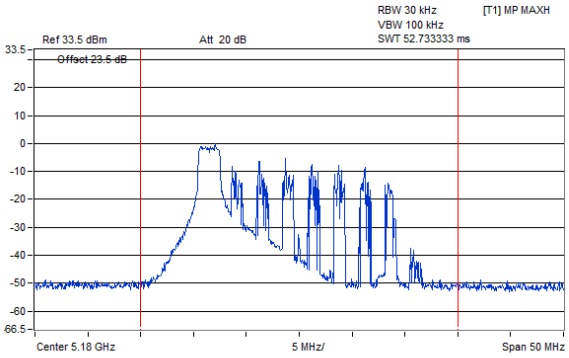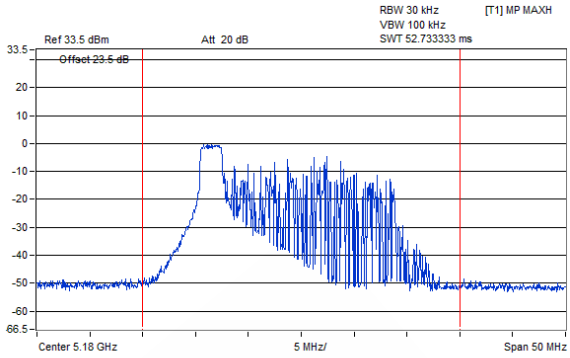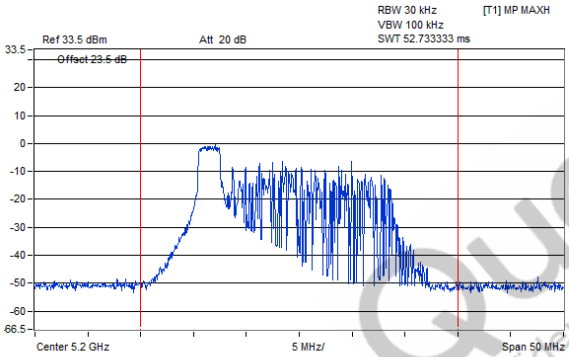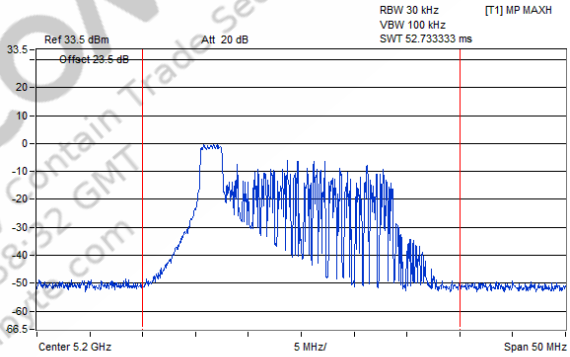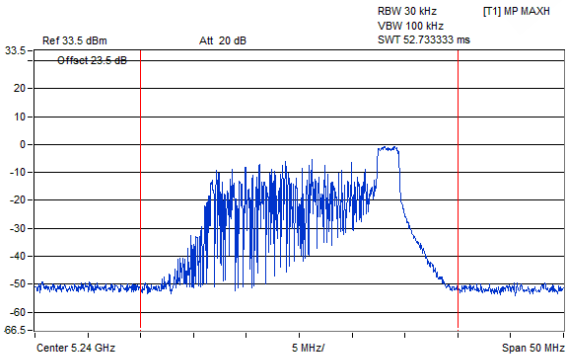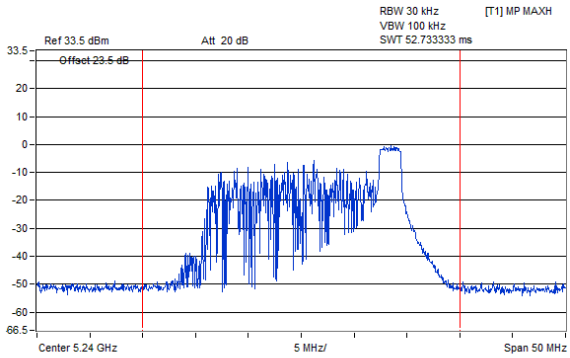Power Plot	
Chain 0	**Chain 1**
CH 36	
 TX Channel Bandwidth 30 MHz Power 17.29 dBm	 TX Channel Bandwidth 30 MHz Power 18.07 dBm
CH 40	
 TX Channel Bandwidth 30 MHz Power 17.65 dBm	 TX Channel Bandwidth 30 MHz Power 18.05 dBm
CH 48	
 TX Channel Bandwidth 30 MHz Power 17.86 dBm	 TX Channel Bandwidth 30 MHz Power 17.82 dBm







Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.viggiani@bureauveritas.com

Power Plot

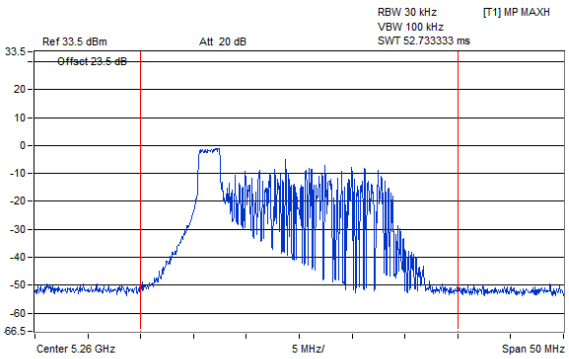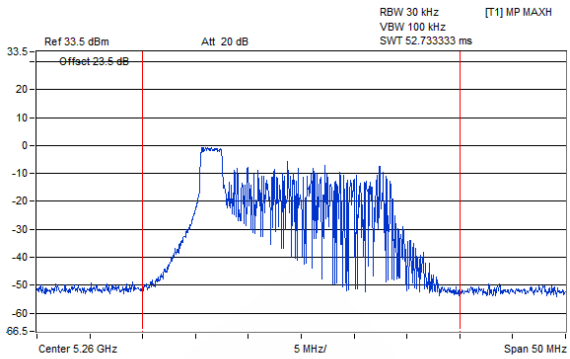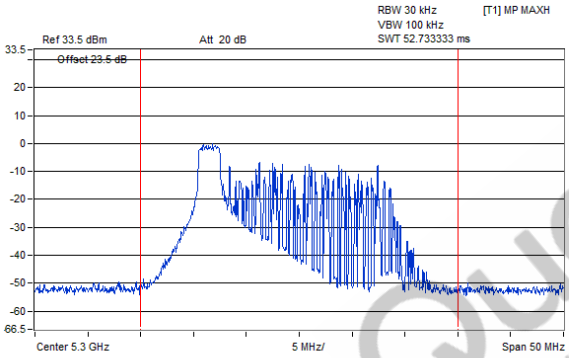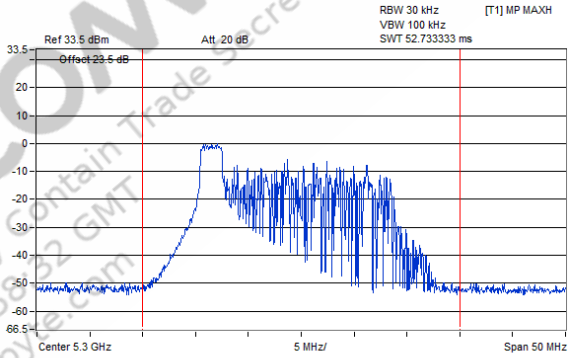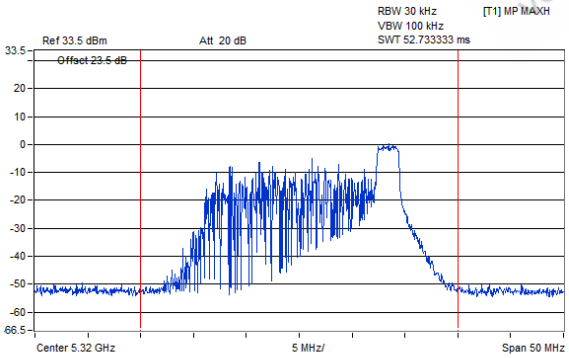
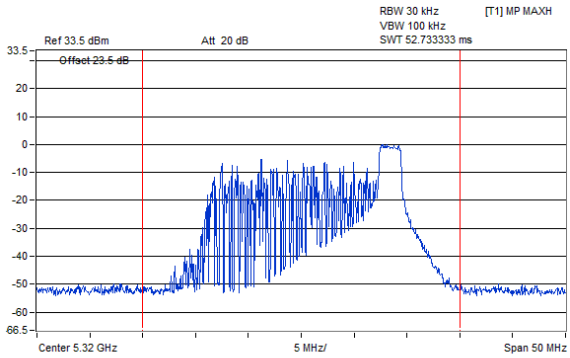
Chain 0	Chain 1
CH 52	
	
TX Channel Bandwidth 30 MHz Power 17.57 dBm	TX Channel Bandwidth 30 MHz Power 18 dBm
CH 60	
	
TX Channel Bandwidth 30 MHz Power 17.63 dBm	TX Channel Bandwidth 30 MHz Power 18.22 dBm
CH 64	
	
TX Channel Bandwidth 30 MHz Power 18.1 dBm	TX Channel Bandwidth 30 MHz Power 18.46 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:56:32 GMT

Power Plot

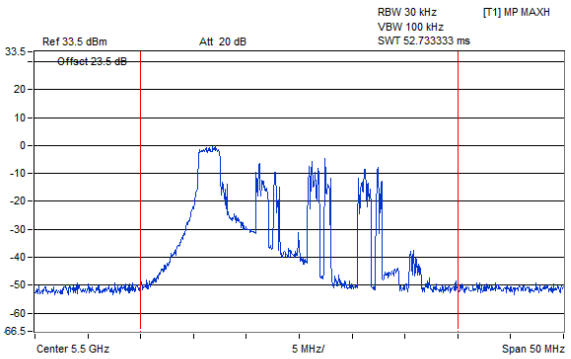
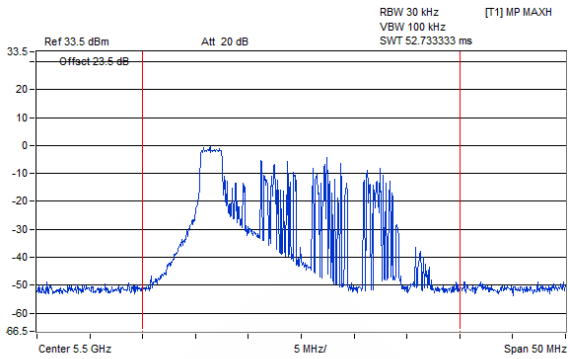
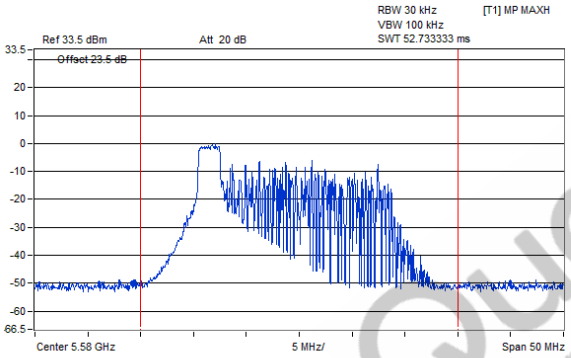
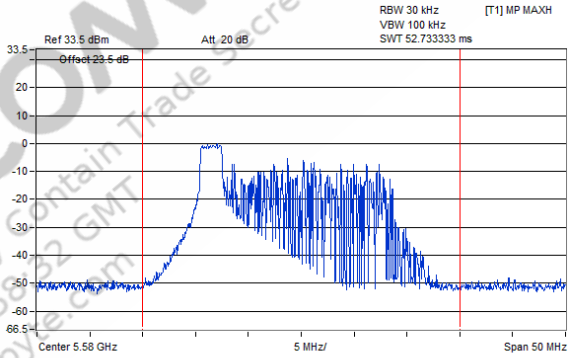
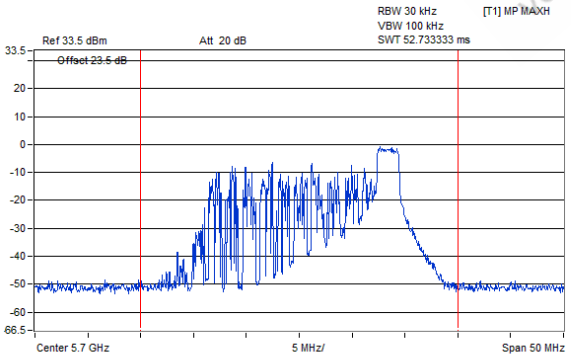
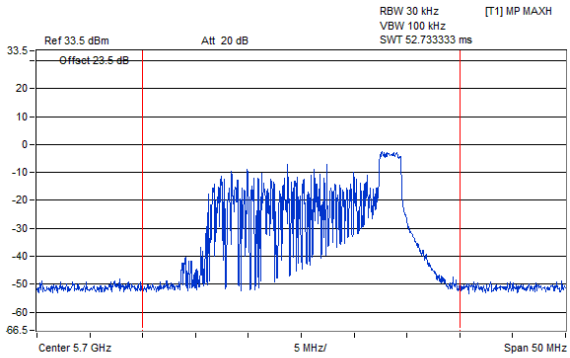
Chain 0	Chain 1
CH 100	
	
TX Channel Bandwidth 30 MHz Power 17.44 dBm	TX Channel Bandwidth 30 MHz Power 17.57 dBm
CH 116	
	
TX Channel Bandwidth 30 MHz Power 17.93 dBm	TX Channel Bandwidth 30 MHz Power 18.28 dBm
CH 140	
	
TX Channel Bandwidth 30 MHz Power 17.44 dBm	TX Channel Bandwidth 30 MHz Power 15.74 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT

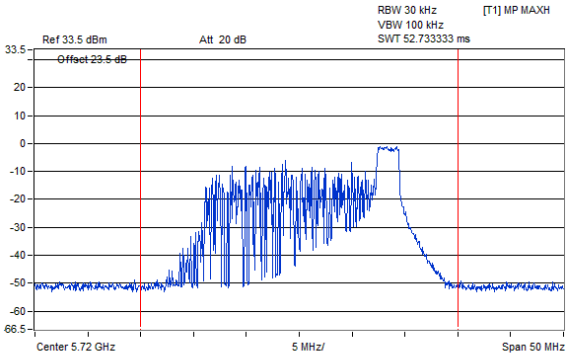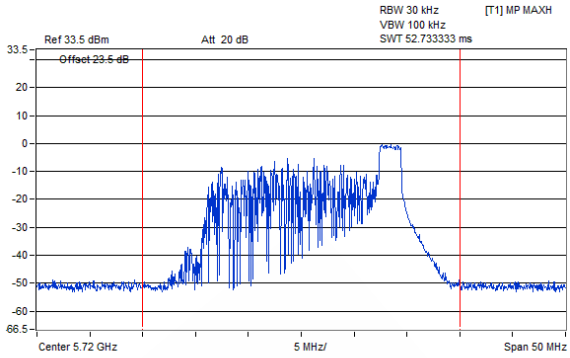Power Plot	
Chain 0	**Chain 1**
CH 144	
 TX Channel Bandwidth 30 MHz Power 17.5 dBm	 TX Channel Bandwidth 30 MHz Power 18.14 dBm







Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT20) 52-tone RU

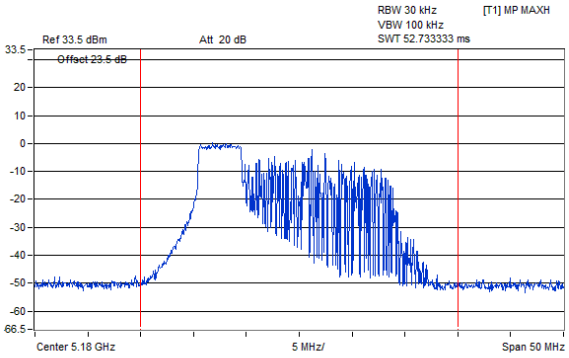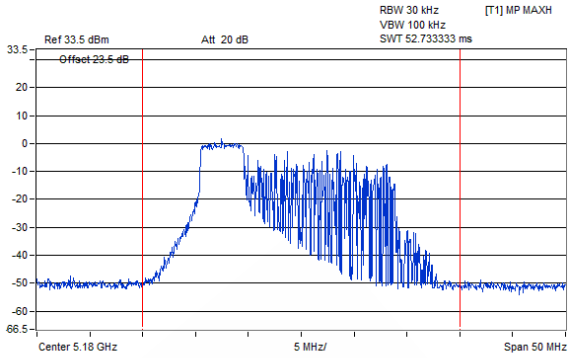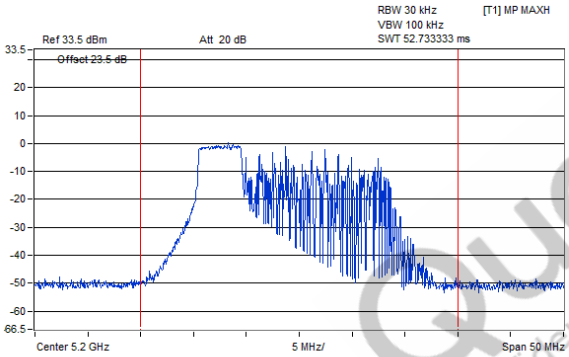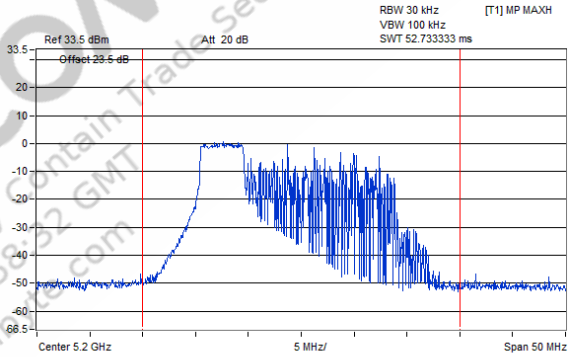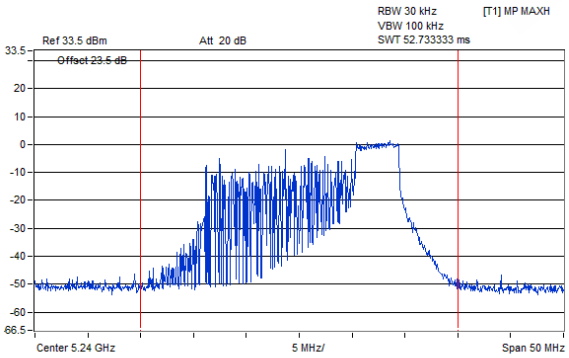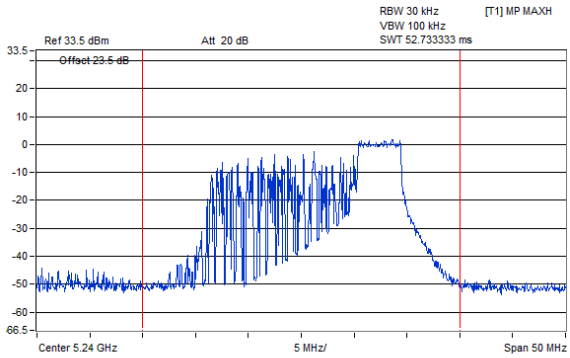Power Plot	
Chain 0	**Chain 1**
CH 36	
 TX Channel Bandwidth 30 MHz Power 20.97 dBm	 TX Channel Bandwidth 30 MHz Power 21.3 dBm
CH 40	
 TX Channel Bandwidth 30 MHz Power 20.8 dBm	 TX Channel Bandwidth 30 MHz Power 21.42 dBm
CH 48	
 TX Channel Bandwidth 30 MHz Power 21.49 dBm	 TX Channel Bandwidth 30 MHz Power 21.98 dBm







Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.vinciguerra@bureauveritas.com

Power Plot

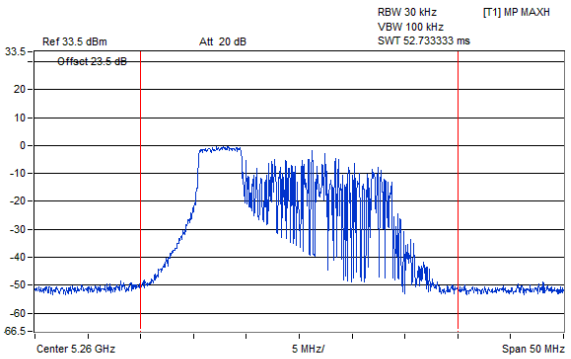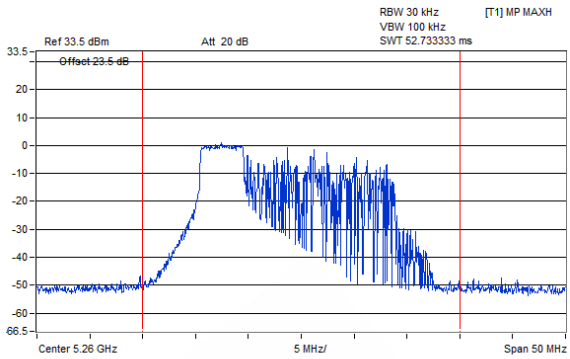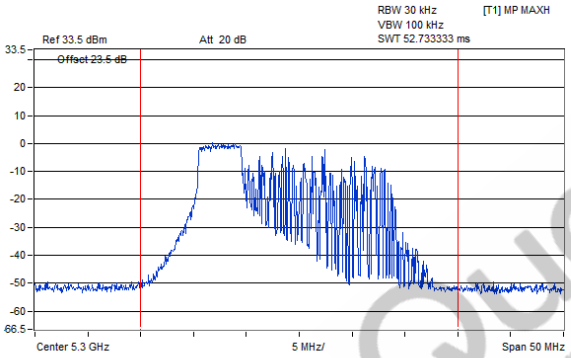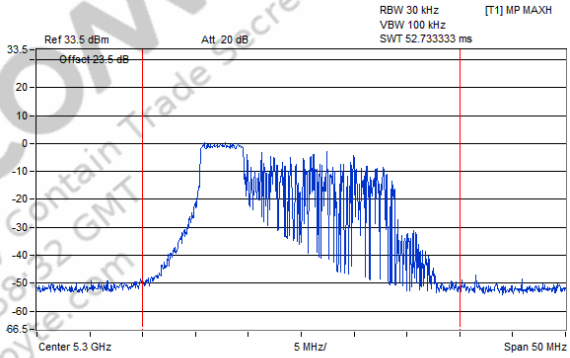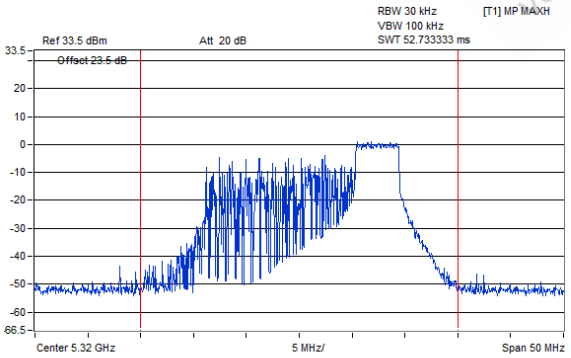
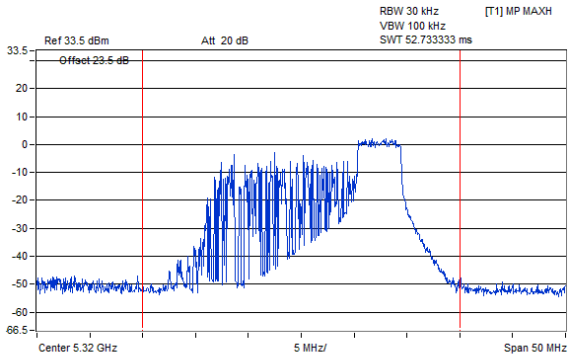
Chain 0	Chain 1
CH 52	
	
TX Channel Bandwidth 30 MHz Power 20.94 dBm	TX Channel Bandwidth 30 MHz Power 21.7 dBm
CH 60	
	
TX Channel Bandwidth 30 MHz Power 20.96 dBm	TX Channel Bandwidth 30 MHz Power 21.38 dBm
CH 64	
	
TX Channel Bandwidth 30 MHz Power 21.4 dBm	TX Channel Bandwidth 30 MHz Power 22.3 dBm

QualComm Confidential - May Contain Trade Secrets 2024-06-25 00:56:32 GMT

Power Plot

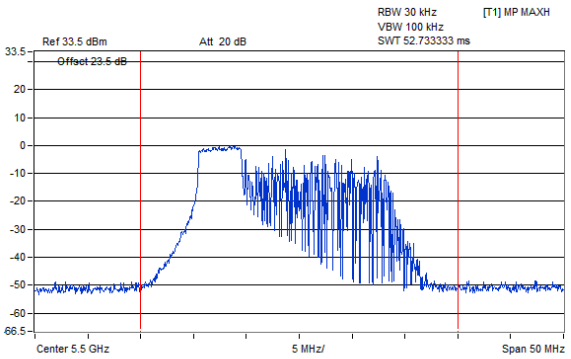
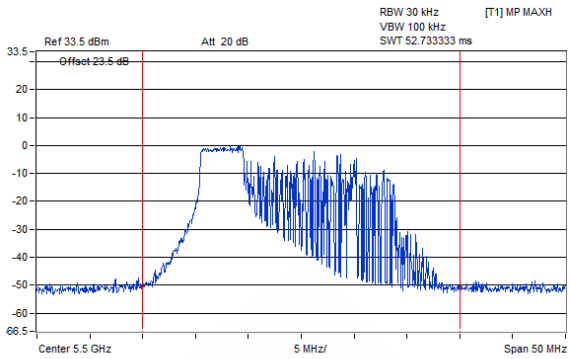
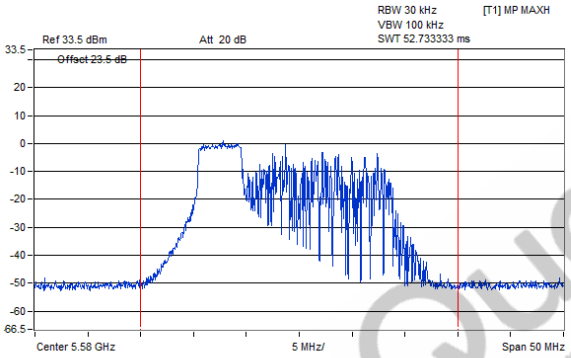
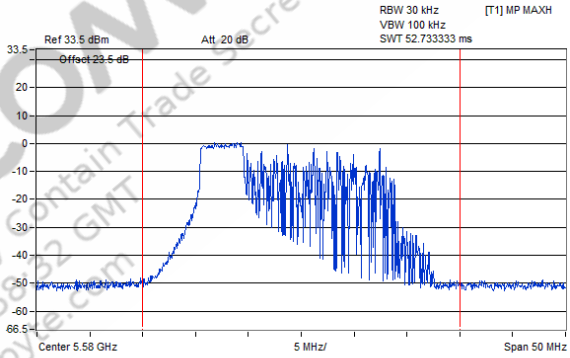
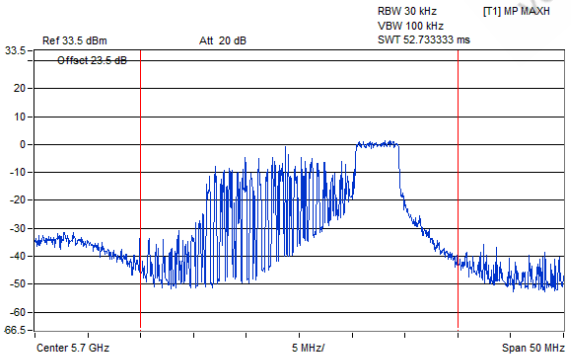
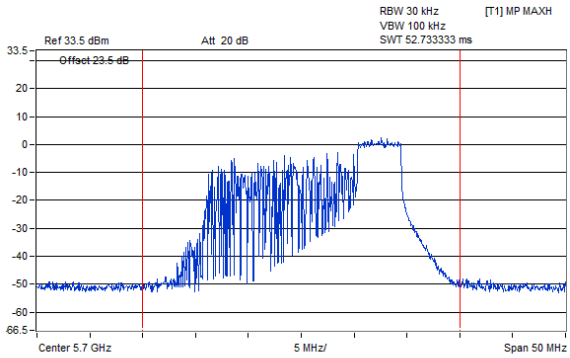
Chain 0	Chain 1
CH 100	
 TX Channel Bandwidth 30 MHz Power 20.91 dBm	 TX Channel Bandwidth 30 MHz Power 20.74 dBm
CH 116	
 TX Channel Bandwidth 30 MHz Power 21.29 dBm	 TX Channel Bandwidth 30 MHz Power 21.59 dBm
CH 140	
 TX Channel Bandwidth 30 MHz Power 21.92 dBm	 TX Channel Bandwidth 30 MHz Power 22.09 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT

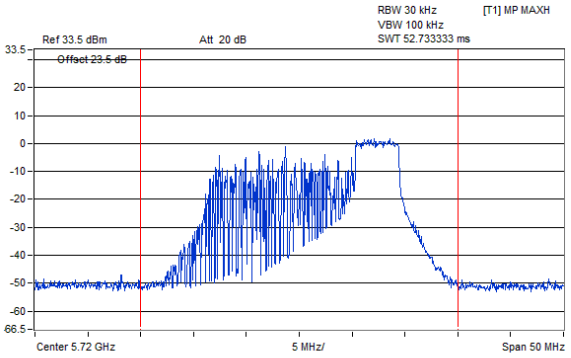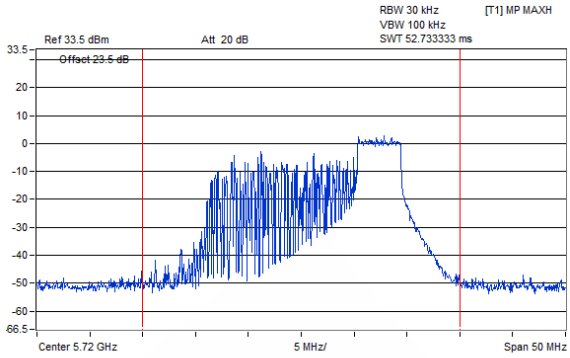Power Plot	
Chain 0	**Chain 1**
CH 144	
 TX Channel Bandwidth 30 MHz Power 22 dBm	 TX Channel Bandwidth 30 MHz Power 22.35 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT20) 52+26-tone MRU

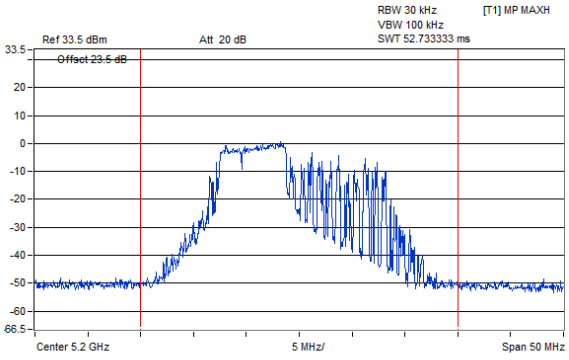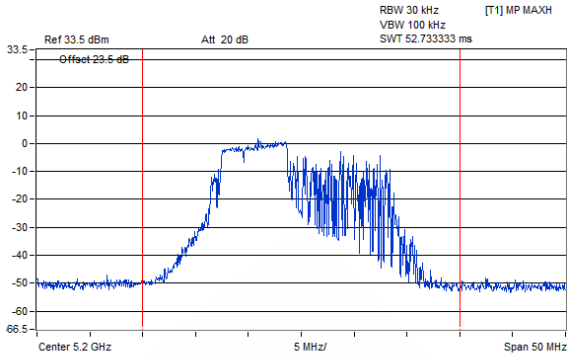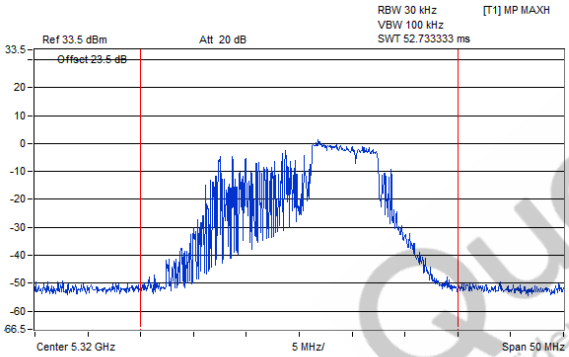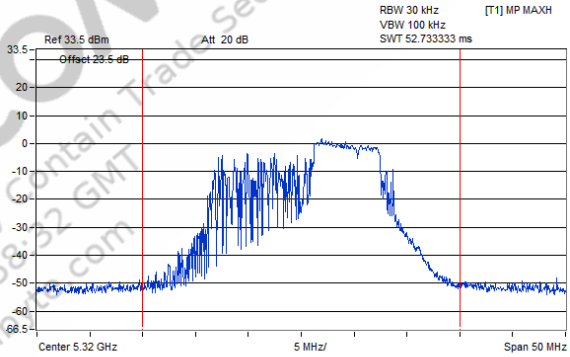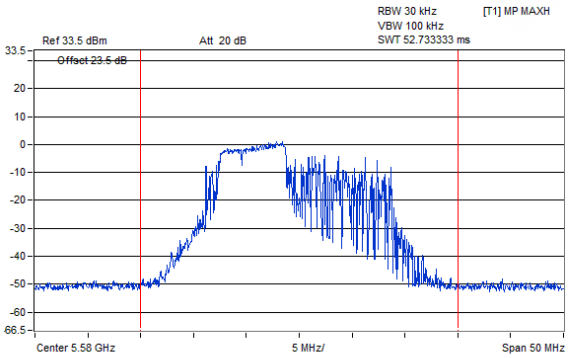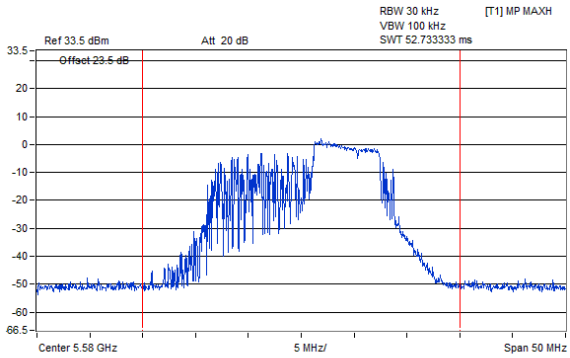Power Plot	
Chain 0	**Chain 1**
CH 40	
 TX Channel Bandwidth 30 MHz Power 21.58 dBm	 TX Channel Bandwidth 30 MHz Power 22.21 dBm
CH 64	
 TX Channel Bandwidth 30 MHz Power 21.89 dBm	 TX Channel Bandwidth 30 MHz Power 22.64 dBm
CH 116	
 TX Channel Bandwidth 30 MHz Power 22.14 dBm	 TX Channel Bandwidth 30 MHz Power 22.65 dBm

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.vinciguerra@bureauveritas.com

7.3 Power Spectral Density

Mode A

Input Power:	3.3 Vdc	Environmental Conditions:	24°C, 65% RH	Tested By:	Eric Peng

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
36	5180	4.34	4.99	7.69	10.64	Pass
40	5200	4.44	4.96	7.72	10.64	Pass
48	5240	4.34	4.80	7.59	10.64	Pass
52	5260	4.17	4.89	7.56	10.57	Pass
60	5300	4.14	4.94	7.57	10.57	Pass
64	5320	4.18	5.19	7.72	10.57	Pass
100	5500	4.19	4.87	7.55	9.18	Pass
116	5580	4.59	5.32	7.98	9.18	Pass
140	5700	4.34	4.93	7.66	9.18	Pass
144 (U-NII-2C)	5720	4.51	5.06	7.80	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

Qualcomm Confidential - May Contain Trade Secrets 2022-06-22 00:58:32 GMT ver: 1 @gigahaus.com

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
36	5180	3.78	4.29	7.05	10.64	Pass
40	5200	4.66	5.08	7.89	10.64	Pass
48	5240	4.44	4.85	7.66	10.64	Pass
52	5260	4.39	5.08	7.76	10.57	Pass
60	5300	4.36	5.11	7.76	10.57	Pass
64	5320	4.37	5.24	7.84	10.57	Pass
100	5500	4.46	5.09	7.80	9.18	Pass
116	5580	4.71	5.58	8.18	9.18	Pass
140	5700	4.40	5.20	7.83	9.18	Pass
144 (U-NII-2C)	5720	4.56	5.25	7.93	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

Qualcomm Confidential May Contain Trade Secrets 2024-06-25 00:58:32 UTC vera.yu@gigabyte.com

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
38	5190	-0.15	0.33	3.11	10.64	Pass
46	5230	0.83	1.18	4.02	10.64	Pass
54	5270	0.59	1.34	3.99	10.57	Pass
62	5310	0.65	1.31	4.00	10.57	Pass
102	5510	0.74	1.30	4.04	9.18	Pass
110	5550	0.86	1.82	4.38	9.18	Pass
134	5670	0.63	1.40	4.04	9.18	Pass
142 (U-NII-2C)	5710	0.73	1.37	4.07	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
42	5210	-3.27	-2.62	0.08	10.64	Pass
58	5290	-4.39	-3.65	-0.99	10.57	Pass
106	5530	-3.79	-2.77	-0.24	9.18	Pass
122	5610	-3.08	-2.45	0.26	9.18	Pass
138 (U-NII-2C)	5690	-2.85	-2.07	0.57	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.ju@gigabyte.com

802.11be (EHT160)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
50 (U-NII-1)	5250	-7.14	-6.61	-3.86	10.64	Pass
50 (U-NII-2A)	5250	-7.15	-6.30	-3.69	10.57	Pass
114	5570	-7.35	-6.55	-3.92	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
36	5180	4.76	5.39	8.10	10.64	Pass
40	5200	4.84	5.45	8.17	10.64	Pass
48	5240	4.89	5.18	8.05	10.64	Pass
52	5260	4.67	5.14	7.92	10.57	Pass
60	5300	4.74	5.14	7.95	10.57	Pass
64	5320	4.82	5.43	8.15	10.57	Pass
100	5500	3.54	3.49	6.53	9.18	Pass
116	5580	3.84	4.00	6.93	9.18	Pass
140	5700	3.08	3.50	6.31	9.18	Pass
144 (U-NII-2C)	5720	-20.18	-24.88	-18.91	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:38:32 GMT vera.wu@gigabyte.com

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
36	5180	5.09	5.75	8.44	10.64	Pass
40	5200	5.26	5.80	8.55	10.64	Pass
48	5240	5.28	5.78	8.55	10.64	Pass
52	5260	5.01	5.41	8.22	10.57	Pass
60	5300	5.11	5.44	8.29	10.57	Pass
64	5320	4.87	5.60	8.26	10.57	Pass
100	5500	3.75	3.88	6.83	9.18	Pass
116	5580	4.29	4.34	7.33	9.18	Pass
140	5700	3.66	4.11	6.90	9.18	Pass
144 (U-NII-2C)	5720	-7.21	-6.56	-3.86	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

Qualcomm Confidential May Contain Trade Secrets 2024-06-25 00:58:32 UTC vera.yu@gigabyte.com

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
36	5180	6.66	7.27	9.99	10.64	Pass
40	5200	7.32	7.67	10.51	10.64	Pass
48	5240	7.02	7.43	10.24	10.64	Pass
52	5260	7.01	7.43	10.24	10.57	Pass
60	5300	6.93	7.53	10.25	10.57	Pass
64	5320	6.48	7.33	9.94	10.57	Pass
100	5500	5.23	5.68	8.47	9.18	Pass
116	5580	5.44	6.27	8.89	9.18	Pass
140	5700	4.72	5.76	8.28	9.18	Pass
144 (U-NII-2C)	5720	5.08	5.93	8.54	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

802.11be (EHT20) 242-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
40	5200	4.30	4.72	7.53	10.64	Pass
64	5320	3.99	4.26	7.14	10.57	Pass
116	5580	4.29	4.68	7.50	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

Qualcomm Confidential May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT40) 484-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
46	5230	0.45	0.53	3.50	10.64	Pass
62	5310	0.45	0.67	3.57	10.57	Pass
110	5550	0.73	1.17	3.97	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

802.11be (EHT80) 996-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
42	5210	-5.07	-4.51	-1.77	10.64	Pass
58	5290	-5.86	-5.09	-2.45	10.57	Pass
138 (U-NII-2C)	5690	-2.51	-2.86	0.33	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 08:53:33 GMT
laura.yu@gigabyte.com

802.11be (EHT160) 2x996-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
50 (U-NII-1)	5250	-9.91	-9.43	-6.65	10.64	Pass
50 (U-NII-2A)	5250	-9.86	-9.14	-6.47	10.57	Pass
114	5570	-9.58	-8.85	-6.19	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

802.11be (EHT20) 52+26-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
40	5200	4.88	5.31	8.11	10.64	Pass
64	5320	5.38	6.30	8.87	10.57	Pass
116	5580	4.15	4.31	7.24	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:38:32 GMT
sara.yue@gigabyte.com

802.11be (EHT20) 106+26-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
40	5200	6.50	7.00	9.77	10.64	Pass
64	5320	6.65	7.66	10.19	10.57	Pass
116	5580	4.53	5.31	7.95	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

802.11be (EHT80) 484+242-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
42	5210	-3.45	-2.84	-0.12	10.64	Pass
58	5290	-4.57	-3.90	-1.21	10.57	Pass
138 (U-NII-2C)	5690	-0.15	0.91	3.42	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:38:32 GMT laura.yue@gigabyte.com

802.11be (EHT160) 996+484-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
50 (U-NII-1)	5250	-7.52	-7.14	-4.32	10.64	Pass
50 (U-NII-2A)	5250	-8.89	-8.31	-5.58	10.57	Pass
114	5570	-8.36	-7.36	-4.82	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

802.11be (EHT80) Punctured by 20 MHz

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
42	5210	-3.04	-2.62	0.19	10.64	Pass
58	5290	-3.80	-3.30	-0.53	10.57	Pass
138 (U-NII-2C)	5690	-0.58	0.13	2.80	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 08:53:33 GMT laura.yu@qti.qualcomm.com

802.11be (EHT160) Punctured by 20 MHz

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
50 (U-NII-1)	5250	-7.54	-7.02	-4.26	10.64	Pass
50 (U-NII-2A)	5250	-7.55	-6.74	-4.12	10.57	Pass
114	5570	-7.31	-6.65	-3.96	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

802.11be (EHT160) Punctured by 40 MHz

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)		Total PSD (dBm/MHz)	Max. PSD Limit (dBm/MHz)	Test Result
		Chain 0	Chain 1			
50 (U-NII-1)	5250	-8.22	-7.73	-4.96	10.64	Pass
50 (U-NII-2A)	5250	-9.51	-8.87	-6.17	10.57	Pass
114	5570	-9.94	-9.00	-6.43	9.18	Pass

Notes:

1. Method E) 2) a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-1, the directional gain is 6.36 dBi > 6dBi, so the power density limit shall be reduced to 11-(6.36-6) = 10.64 dBm/MHz.
4. For U-NII-2A, the directional gain is 6.43 dBi > 6 dBi, so the power density limit shall be reduced to 11-(6.43-6) = 10.57 dBm/MHz.
5. For U-NII-2C, the directional gain is 7.82 dBi > 6 dBi, so the power density limit shall be reduced to 11-(7.82-6) = 9.18 dBm/MHz.

Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 06:55:32 GMT
laura.yu@dongbyte.com

802.11a

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
144 (U-NII-3)	5720	-3.79	-2.92	-0.32	1.90	28.27	Pass
149	5745	-0.45	0.00	2.79	5.01	28.27	Pass
157	5785	-0.75	-0.18	2.55	4.77	28.27	Pass
165	5825	-0.45	0.30	2.95	5.17	28.27	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 7.73 dBi > 6 dBi, so the power density limit shall be reduced to 30-(7.73-6) = 28.27 dBm/500kHz.

802.11be (EHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
144 (U-NII-3)	5720	-3.98	-3.20	-0.56	1.66	28.27	Pass
149	5745	-0.57	0.21	2.85	5.07	28.27	Pass
157	5785	-0.69	-0.06	2.65	4.87	28.27	Pass
165	5825	-0.44	0.34	2.98	5.20	28.27	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 7.73 dBi > 6 dBi, so the power density limit shall be reduced to 30-(7.73-6) = 28.27 dBm/500kHz.

802.11be (EHT40)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
142 (U-NII-3)	5710	-7.53	-7.28	-4.39	-2.17	28.27	Pass
151	5755	-4.63	-4.06	-1.33	0.89	28.27	Pass
159	5795	-4.47	-3.79	-1.11	1.11	28.27	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 7.73 dBi > 6 dBi, so the power density limit shall be reduced to 30-(7.73-6) = 28.27 dBm/500kHz.

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 01:13:32 GMT
vera.lu@gigabyte.com

802.11be (EHT80)

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
138 (U-NII-3)	5690	-12.25	-11.89	-9.06	-6.84	28.27	Pass
155	5775	-8.23	-7.43	-4.8	-2.58	28.27	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 7.73 dBi > 6 dBi, so the power density limit shall be reduced to 30-(7.73-6) = 28.27 dBm/500kHz.

802.11be (EHT20) 26-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
144 (U-NII-3)	5720	-1.92	-1.49	1.31	3.53	28.27	Pass
149	5745	5.98	6.02	9.01	11.23	28.27	Pass
157	5785	5.63	5.89	8.77	10.99	28.27	Pass
165	5825	5.42	6.02	8.74	10.96	28.27	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 7.73 dBi > 6 dBi, so the power density limit shall be reduced to 30-(7.73-6) = 28.27 dBm/500kHz.

802.11be (EHT20) 52-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
144 (U-NII-3)	5720	-1.37	-1.08	1.79	4.01	28.27	Pass
149	5745	3.19	3.46	6.34	8.56	28.27	Pass
157	5785	2.94	3.26	6.11	8.33	28.27	Pass
165	5825	2.77	2.95	5.87	8.09	28.27	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 7.73 dBi > 6 dBi, so the power density limit shall be reduced to 30-(7.73-6) = 28.27 dBm/500kHz.

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:13:32 GMT ver: yl=@gigabyte.com

802.11be (EHT20) 106-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
144 (U-NII-3)	5720	-2.20	-1.54	1.15	3.37	28.27	Pass
149	5745	2.11	2.79	5.47	7.69	28.27	Pass
157	5785	2.02	2.67	5.37	7.59	28.27	Pass
165	5825	1.90	2.80	5.38	7.60	28.27	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 7.73 dBi > 6 dBi, so the power density limit shall be reduced to 30-(7.73-6) = 28.27 dBm/500kHz.

802.11be (EHT20) 242-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
165	5825	-0.93	-0.17	2.48	4.70	28.27	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 7.73 dBi > 6 dBi, so the power density limit shall be reduced to 30-(7.73-6) = 28.27 dBm/500kHz.

802.11be (EHT40) 484-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
159	5795	-4.80	-4.58	-1.68	0.54	28.27	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 7.73 dBi > 6 dBi, so the power density limit shall be reduced to 30-(7.73-6) = 28.27 dBm/500kHz.

Qualcomm Confidential - May Contain Trade Secrets
2021-06-25 04:58:32 GMT
vera.yu@globalbyte.com

802.11be (EHT80) 996-tone RU

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
138 (U-NII-3)	5690	-11.99	-12.58	-9.26	-7.04	28.27	Pass
155	5775	-8.35	-8.21	-5.27	-3.05	28.27	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 7.73 dBi > 6 dBi, so the power density limit shall be reduced to 30-(7.73-6) = 28.27 dBm/500kHz.

802.11be (EHT20) 52+26-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
165	5825	3.34	4.17	6.79	9.01	28.27	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 7.73 dBi > 6 dBi, so the power density limit shall be reduced to 30-(7.73-6) = 28.27 dBm/500kHz.

802.11be (EHT20) 106+26-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
165	5825	1.86	2.63	5.27	7.49	28.27	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 7.73 dBi > 6 dBi, so the power density limit shall be reduced to 30-(7.73-6) = 28.27 dBm/500kHz.

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 10:38:32 GMT vera.yu@gigabyte.com

802.11be (EHT80) 484+242-tone MRU

Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
138 (U-NII-3)	5690	-9.20	-8.91	-6.04	-3.82	28.27	Pass
155	5775	-5.39	-4.55	-1.94	0.28	28.27	Pass

Notes:

1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 7.73 dBi > 6 dBi, so the power density limit shall be reduced to 30-(7.73-6) = 28.27 dBm/500kHz.

802.11be (EHT80) Punctured by 20 MHz


Chan.	Chan. Freq. (MHz)	PSD (dBm/300kHz)		Total PSD (dBm/300kHz)	Total PSD (dBm/500kHz)	PSD Limit (dBm/500kHz)	Test Result
		Chain 0	Chain 1				
138 (U-NII-3)	5690	-10.08	-9.69	-6.87	-4.65	28.27	Pass
155	5775	-5.94	-5.29	-2.59	-0.37	28.27	Pass

Notes:


1. Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = gain of antenna element + 10 log (2 of TX antenna elements)
3. For U-NII-3, the directional gain is 7.73 dBi > 6 dBi, so the power density limit shall be reduced to 30-(7.73-6) = 28.27 dBm/500kHz.

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@globalte.com


Spectrum Plot of Maximum Value

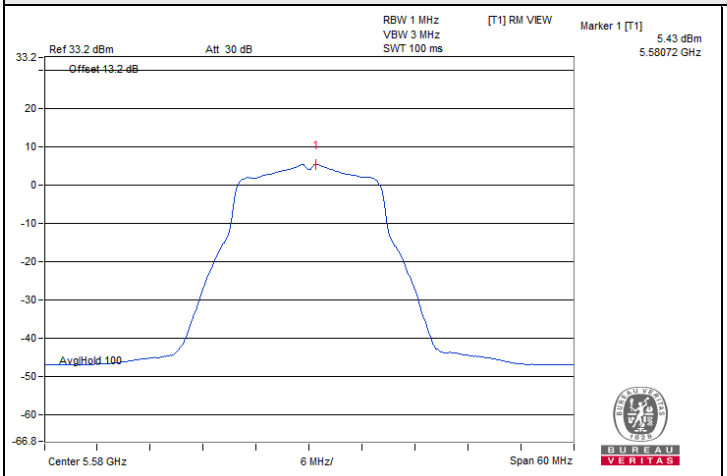


802.11a / Chain 1 : CH 116

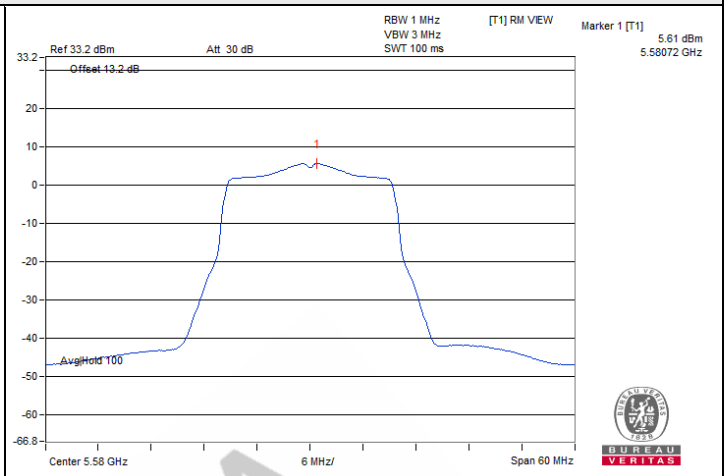


802.11be (EHT20) / Chain 1 : CH 116

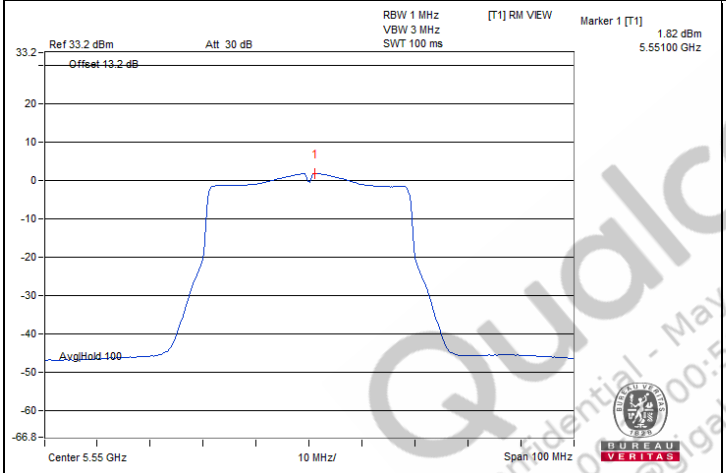


802.11be (EHT40) / Chain 1 : CH 110

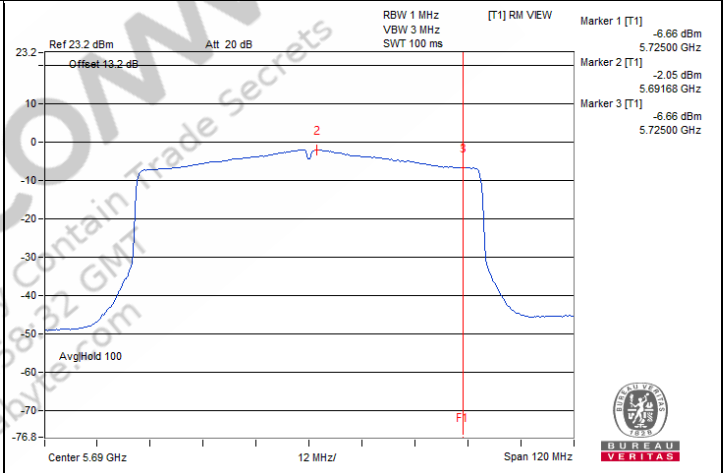

802.11be (EHT80) / Chain 1 : CH 138 (U-NII-2C)

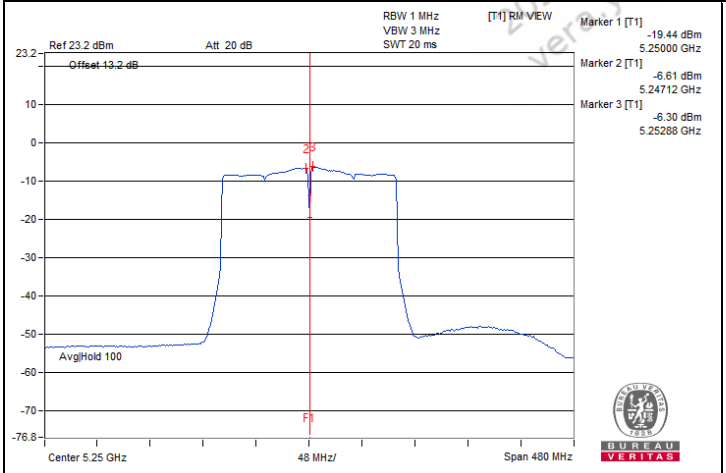


802.11be (EHT160) / Chain 1 : CH 50 (U-NII-2A)

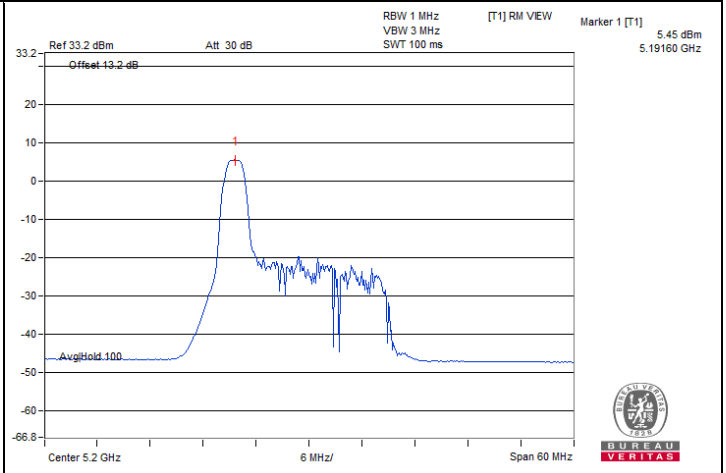


802.11be (EHT20) 26-tone RU / Chain 1 : CH 40@0

Qualcomm
Confidential - May Contain Trade Secrets
2024-0[illegible]00:58:32 GMT
verayu@gigalytetcom


Spectrum Plot of Maximum Value

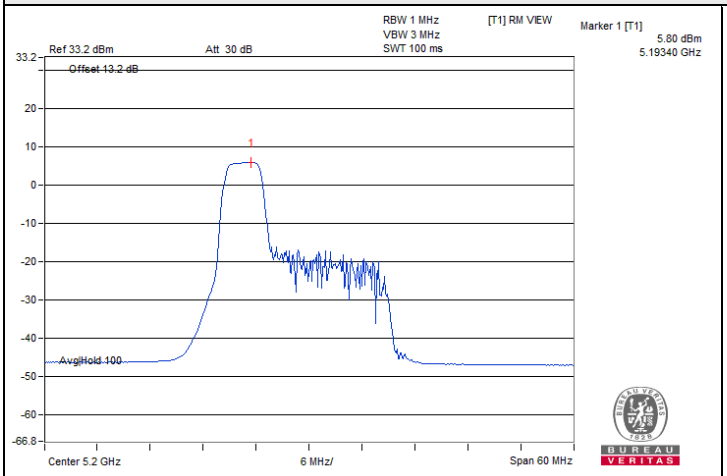


802.11be (EHT20) 52-tone RU / Chain 1 : CH 40@37

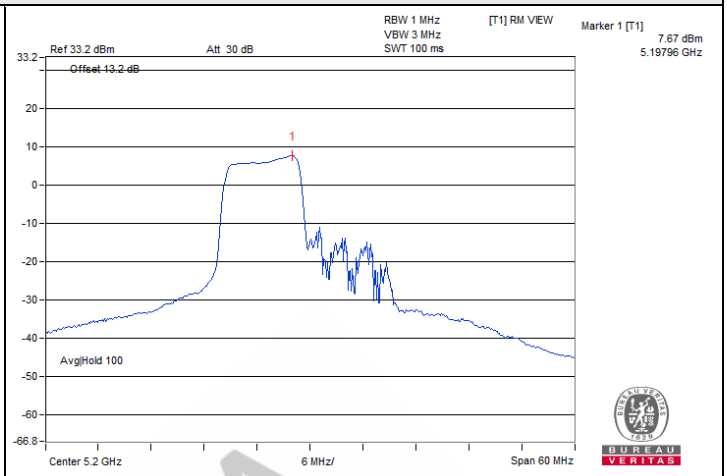


802.11be (EHT20) 106-tone RU / Chain 1 : CH 40@53

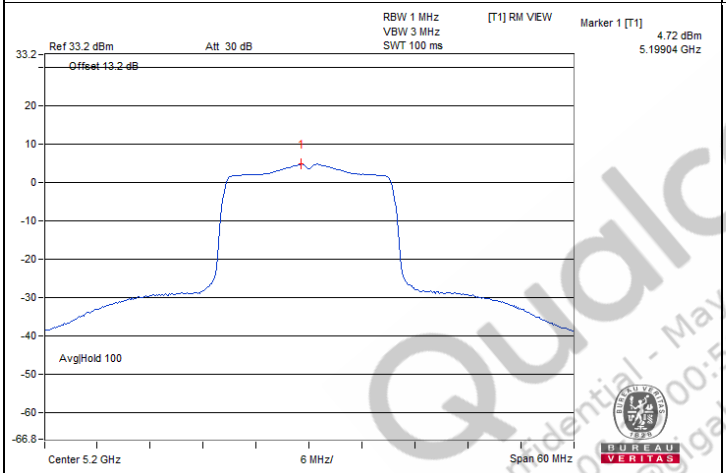


802.11be (EHT20) 242-tone RU / Chain 1 : CH 40

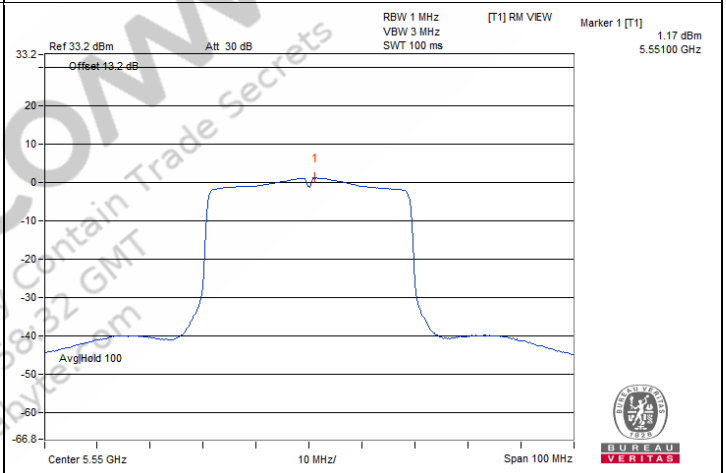

802.11be (EHT40) 484-tone RU / Chain 1 : CH 110

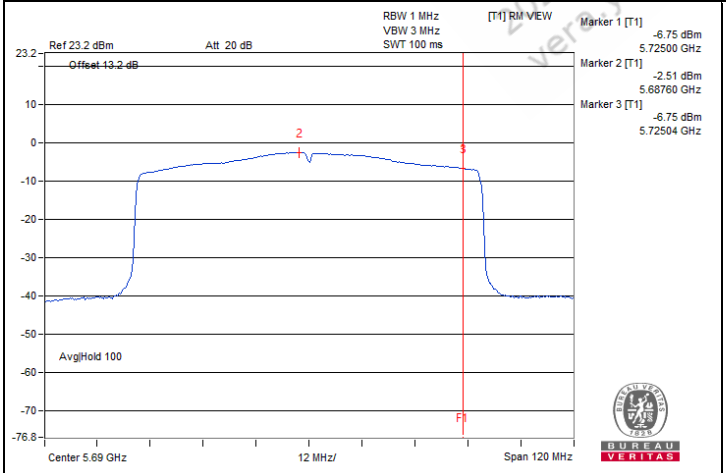


802.11be (EHT80) 996-tone RU / Chain 0 : CH 138 (U-NII-2C)

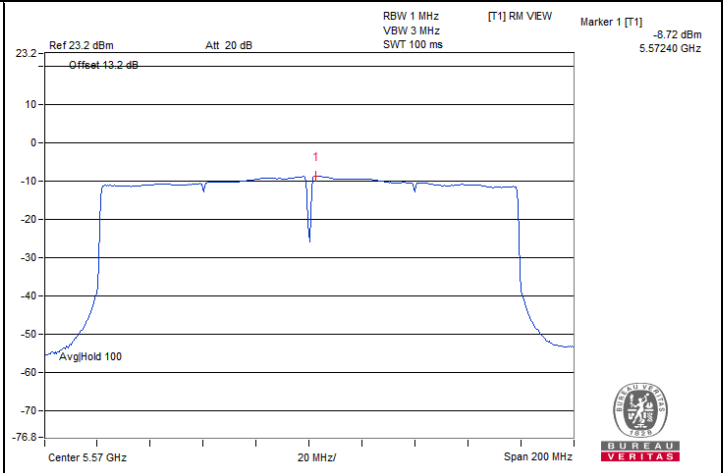


802.11be (EHT160) 2x996-tone RU / Chain 1 : CH 114

Qualcomm
Confidential - May Contain Trade Secrets
2021-05-00:58:32 GMT
verayu@gigalytes.com


Spectrum Plot of Maximum Value

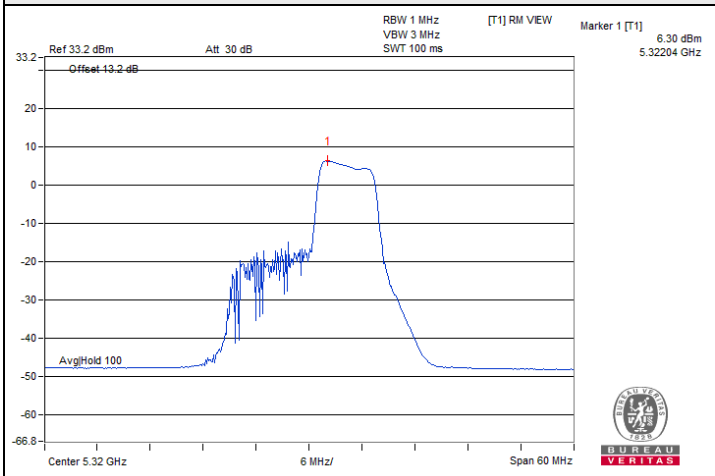


802.11be (EHT20) 52+26-tone MRU / Chain 1 : CH 64

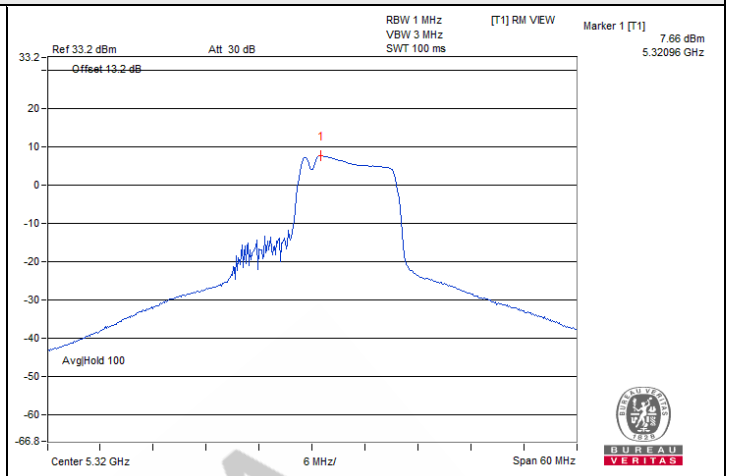


802.11be (EHT20) 106+26-tone MRU / Chain 1 : CH 64

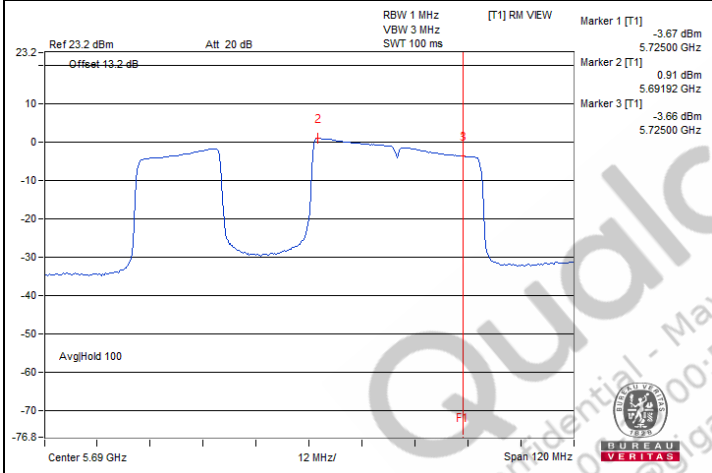


802.11be (EHT80) 484+242-tone MRU / Chain 1 : CH 138@2 (U-NII-2C)

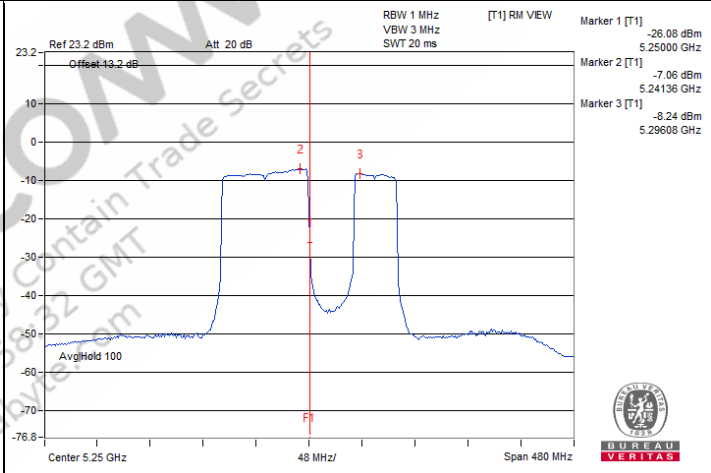

802.11be (EHT160) 996+484-tone MRU / Chain 1 : CH 50@2 (U-NII-1)

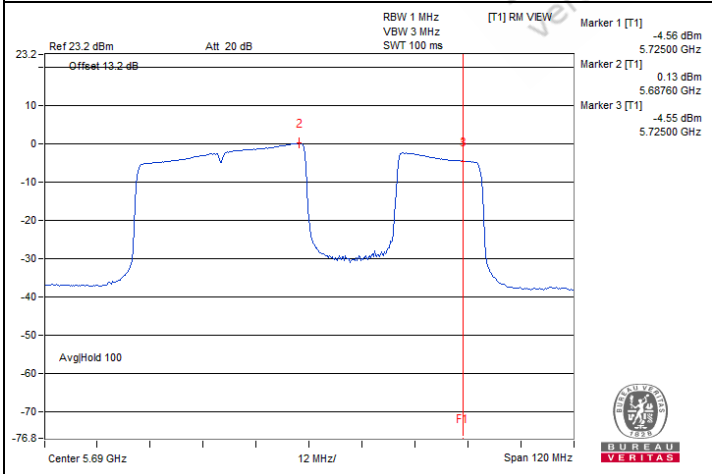


802.11be (EHT80) Punctured by 20 MHz / Chain 1 : CH 138@2 (U-NII-2C)

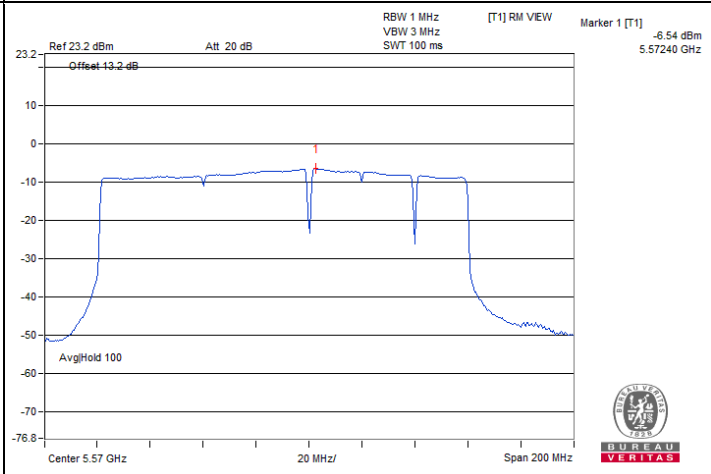


802.11be (EHT160) Punctured by 20 MHz / Chain 1 : CH 114@5

Qualcomm
Confidential - May Contain Trade Secrets
2024-0[illegible]00:58:32 GMT
vera.y[illegible]@gigabyte.com


Spectrum Plot of Maximum Value

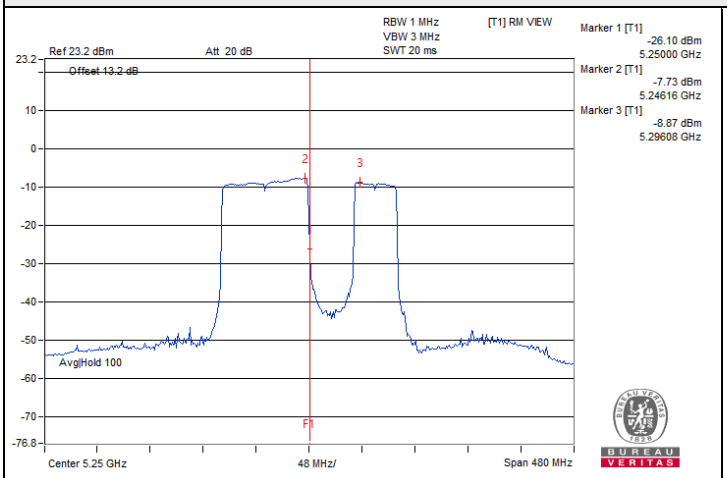


802.11be (EHT160) Punctured by 40 MHz / Chain 1 : CH 50@10 (U-NII-1)

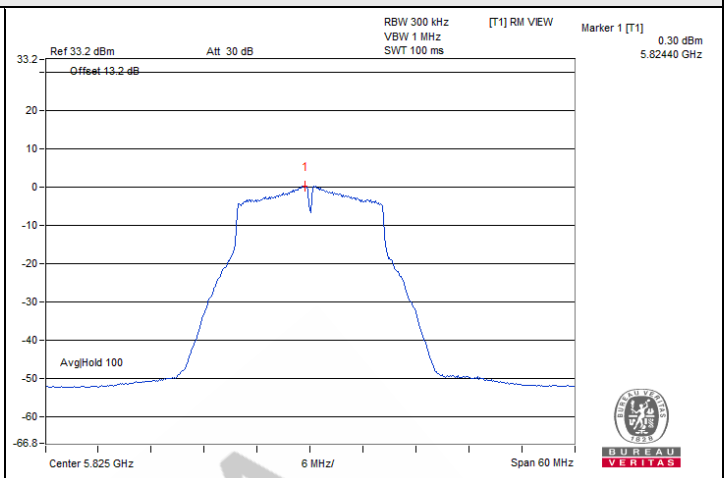


802.11a / Chain 1 : CH 165

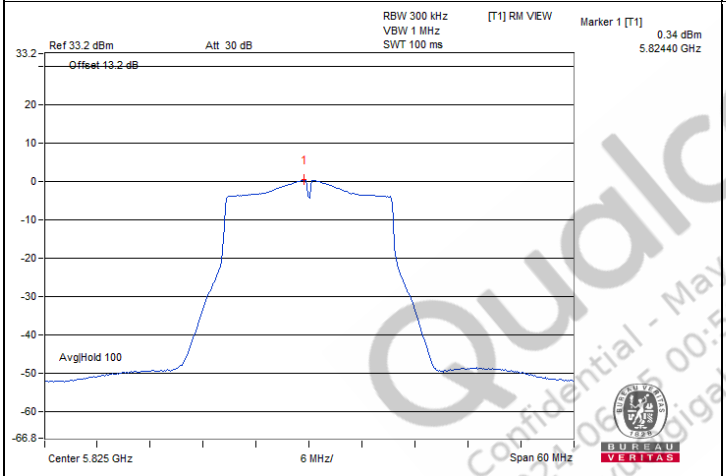


802.11be (EHT20) / Chain 1 : CH 165

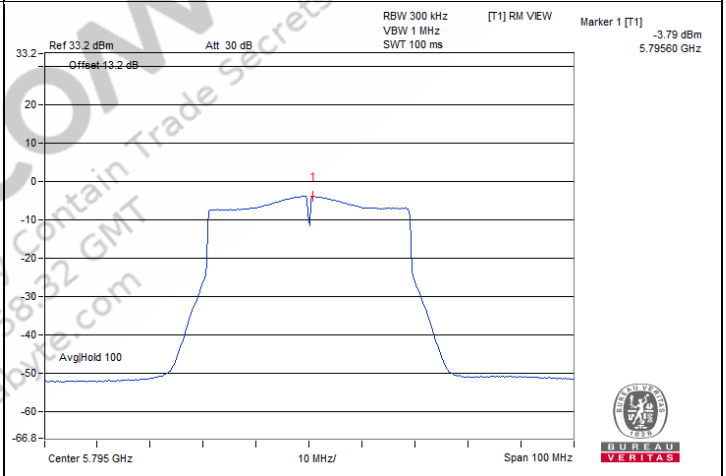

802.11be (EHT40) / Chain 1 : CH 159

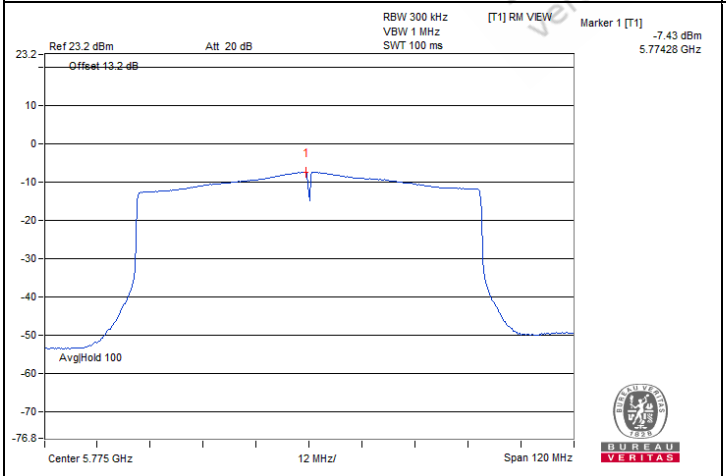


802.11be (EHT80) / Chain 1 : CH 155

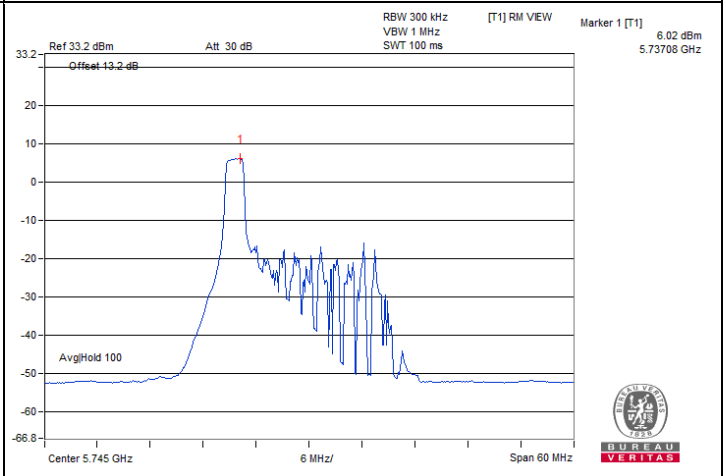


802.11be (EHT20) 26-tone RU / Chain 1 : CH 149@0

Qualcomm Confidential - May Contain Trade Secrets 2021-06-15 00:58:32 GMT vera.yu@bigaute.com


Spectrum Plot of Maximum Value

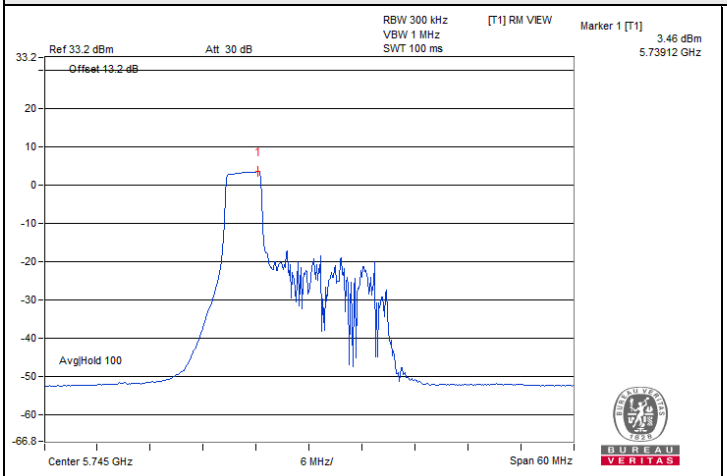


802.11be (EHT20) 52-tone RU / Chain 1 : CH 149@37

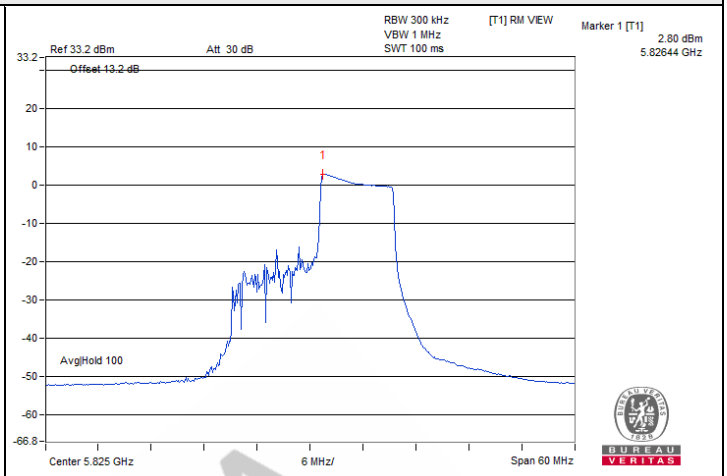


802.11be (EHT20) 106-tone RU / Chain 1 : CH 165@54

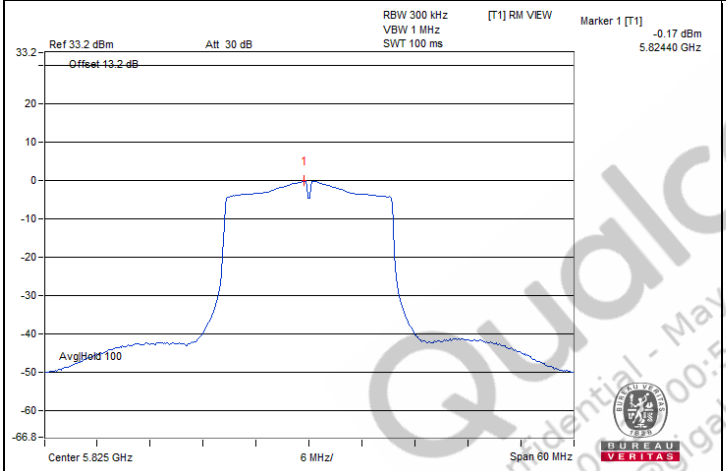


802.11be (EHT20) 242-tone RU / Chain 1 : CH 165

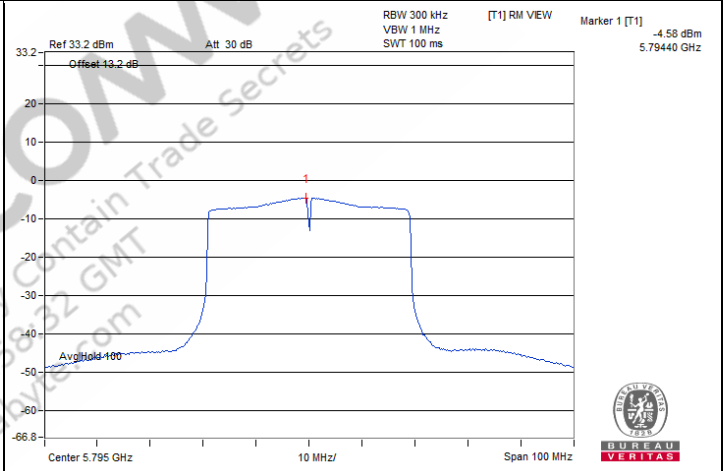

802.11be (EHT40) 484-tone RU / Chain 1 : CH 159

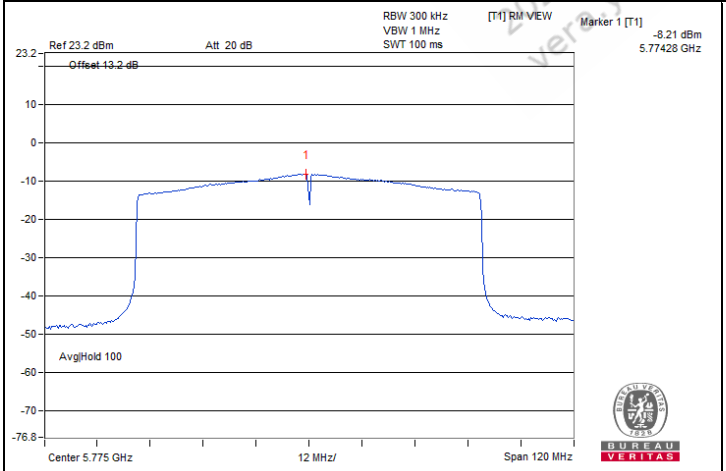


802.11be (EHT80) 996-tone RU / Chain 1 : CH 155

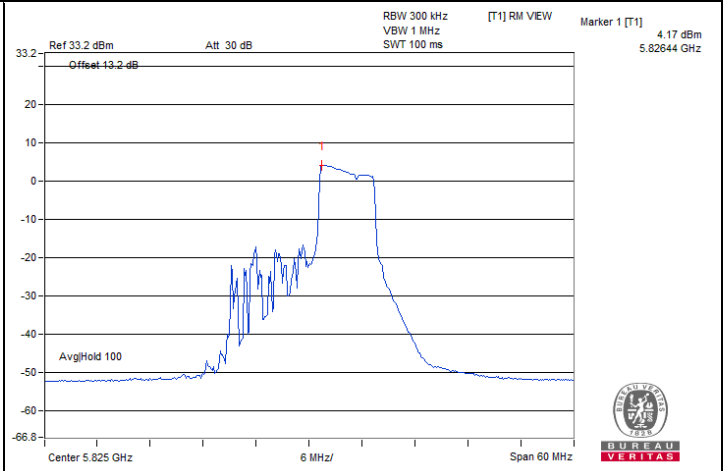


802.11be (EHT20) 52+26-tone MRU / Chain 1 : CH 165

Qualcomm Confidential - May Contain Trade Secrets 2021-05-00:58:32 GMT verayu@qualcomm.com


Spectrum Plot of Maximum Value

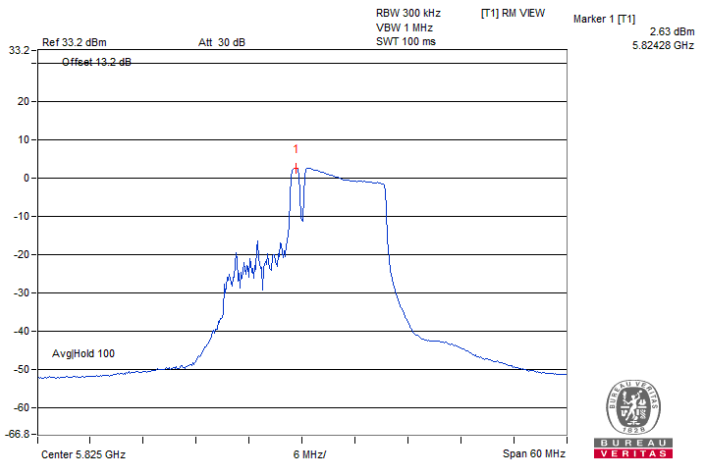

802.11be (EHT20) 106+26-tone MRU / Chain 1 : CH 165

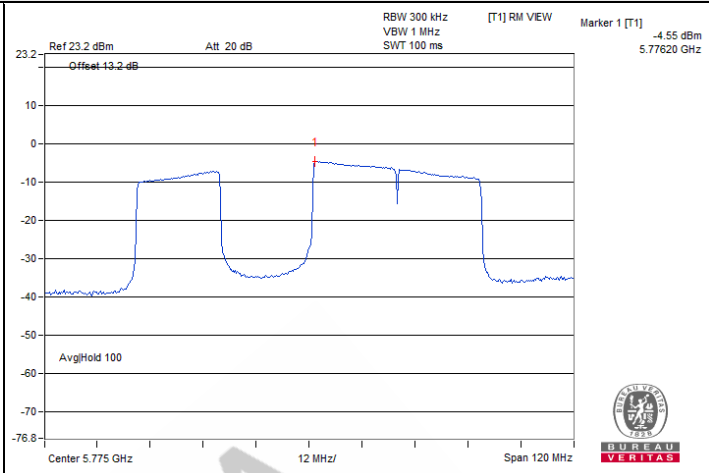

802.11be (EHT80) 484+242-tone MRU / Chain 1 : CH 155@3

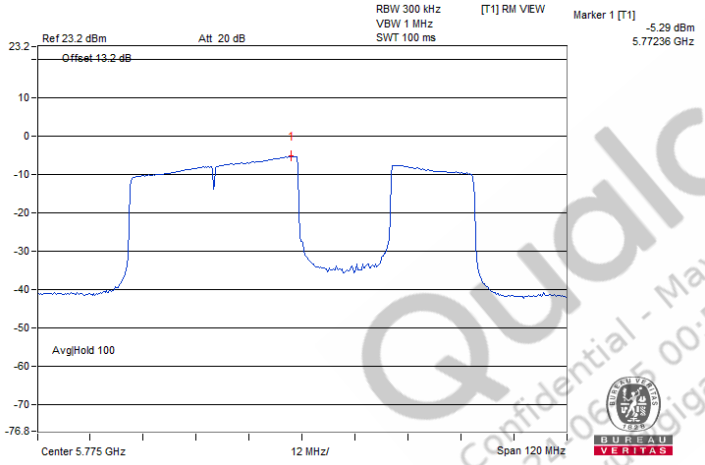

802.11be (EHT80) Punctured by 20 MHz / Chain 1 : CH 155@3

QualcOMM Confidential - May Contain Trade Secrets 2022-06-15 00:58:32 GMT ver:1 yvu@gigabyte.com

7.4 6 dB Bandwidth

Mode A

Input Power:	3.3 Vdc	Environmental Conditions:	24°C, 65% RH	Tested By:	Eric Peng

802.11a

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
144 (U-NII-3)	5720	1.21	3.10	0.5	Pass
149	5745	15.06	15.03	0.5	Pass
157	5785	15.02	15.08	0.5	Pass
165	5825	15.87	14.48	0.5	Pass

802.11be (EHT20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
144 (U-NII-3)	5720	4.22	4.16	0.5	Pass
149	5745	18.67	18.64	0.5	Pass
157	5785	18.73	18.75	0.5	Pass
165	5825	15.59	18.71	0.5	Pass

802.11be (EHT40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
142 (U-NII-3)	5710	1.20	1.25	0.5	Pass
151	5755	35.87	33.78	0.5	Pass
159	5795	37.91	37.77	0.5	Pass

802.11be (EHT80)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
138 (U-NII-3)	5690	3.60	2.53	0.5	Pass
155	5775	70.63	71.30	0.5	Pass

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:39:32 GMT

802.11be (EHT20) 26-tone RU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
144 (U-NII-3)	5720	4.44	4.47	0.5	Pass
149	5745	12.04	10.82	0.5	Pass
157	5785	12.05	14.52	0.5	Pass
165	5825	12.06	10.85	0.5	Pass

802.11be (EHT20) 52-tone RU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
144 (U-NII-3)	5720	4.44	4.44	0.5	Pass
149	5745	17.07	17.07	0.5	Pass
157	5785	17.05	17.02	0.5	Pass
165	5825	17.04	17.04	0.5	Pass

802.11be (EHT20) 106-tone RU

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
144 (U-NII-3)	5720	4.47	4.49	0.5	Pass
149	5745	17.09	17.09	0.5	Pass
157	5785	17.12	17.07	0.5	Pass
165	5825	17.09	17.09	0.5	Pass

802.11be (EHT80) 484+242-tone MRU


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
138 (U-NII-3)	5690	1.42	3.70	0.5	Pass
155	5775	75.25	77.72	0.5	Pass

802.11be (EHT80) Punctured by 20 MHz


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
138 (U-NII-3)	5690	3.31	3.63	0.5	Pass
155	5775	69.62	74.74	0.5	Pass

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:39 GMT
vera.vu@gigabyte.com


Spectrum Plot of Minimum Value

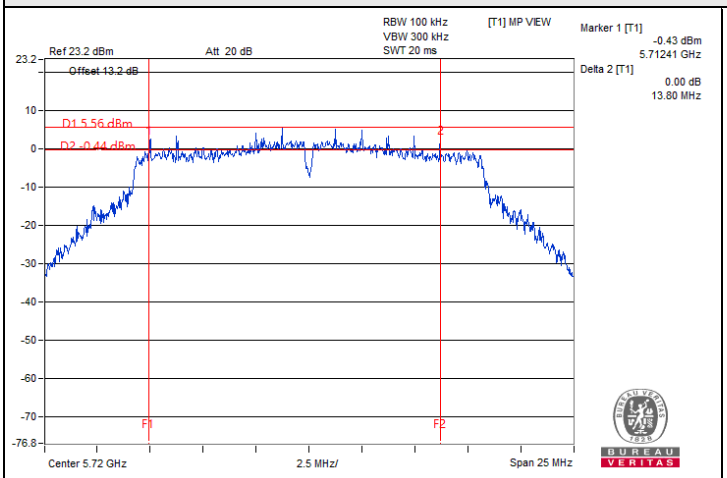


802.11a / Chain 0 : CH 144 (U-NII-3)

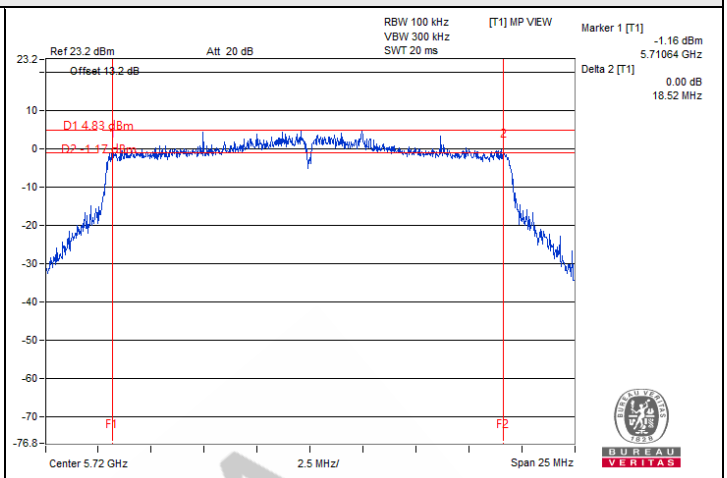


802.11be (EHT20) / Chain 1 : CH 144 (U-NII-3)

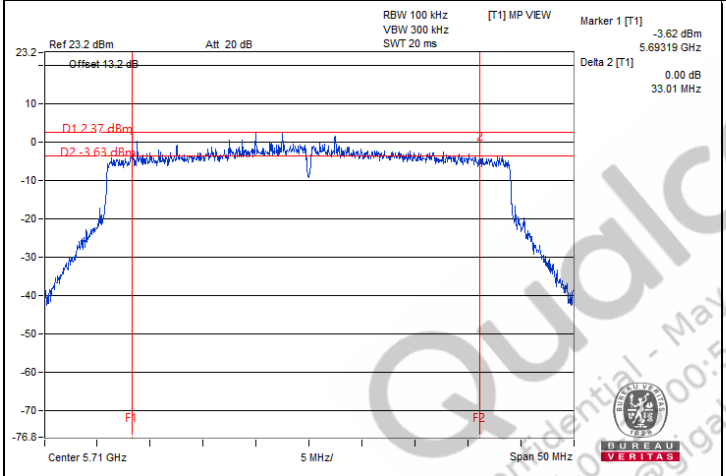


802.11be (EHT40) / Chain 0 : CH 142 (U-NII-3)

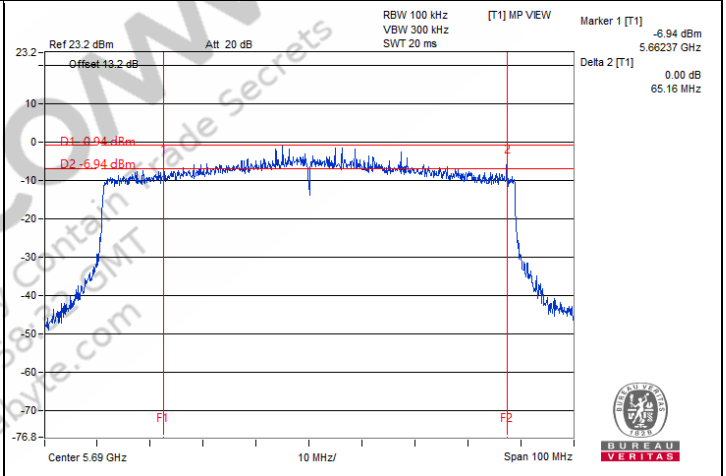

802.11be (EHT80) / Chain 1 : CH 138 (U-NII-3)

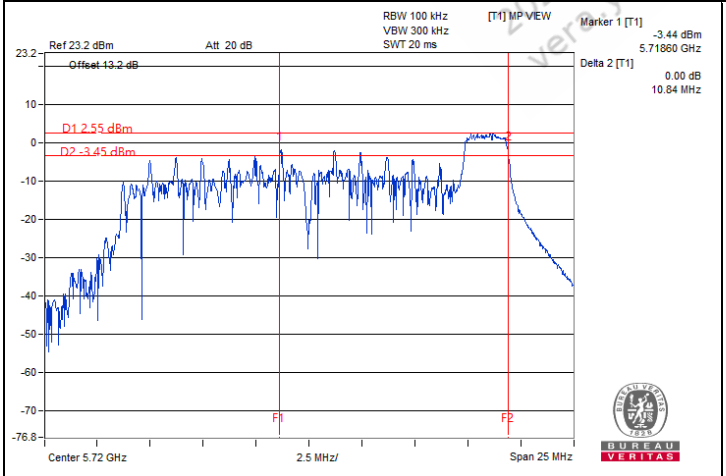


802.11be (EHT20) 26-tone RU / Chain 0 : CH 144@8 (U-NII-3)

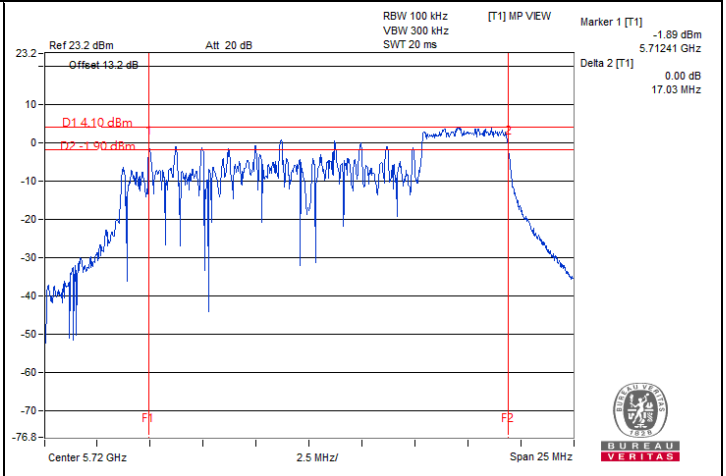


802.11be (EHT20) 52-tone RU / Chain 0 : CH 144@40 (U-NII-3)

Qualcomm
Confidential - May Contain Trade Secrets


Spectrum Plot of Minimum Value

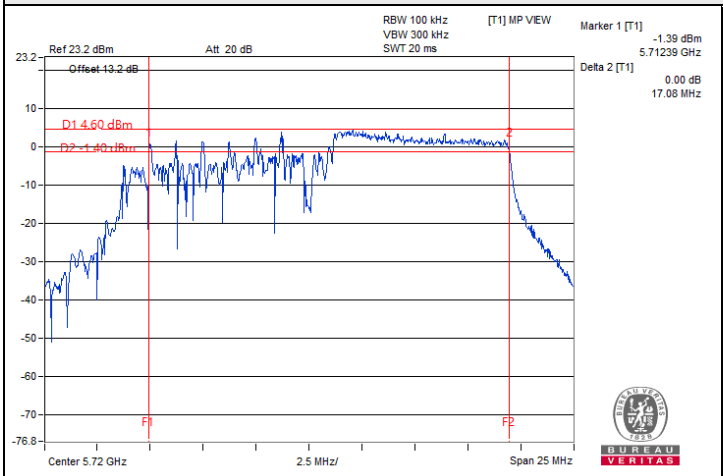

802.11be (EHT20) 106-tone RU / Chain 0 : CH 144@54 (U-NII-3)

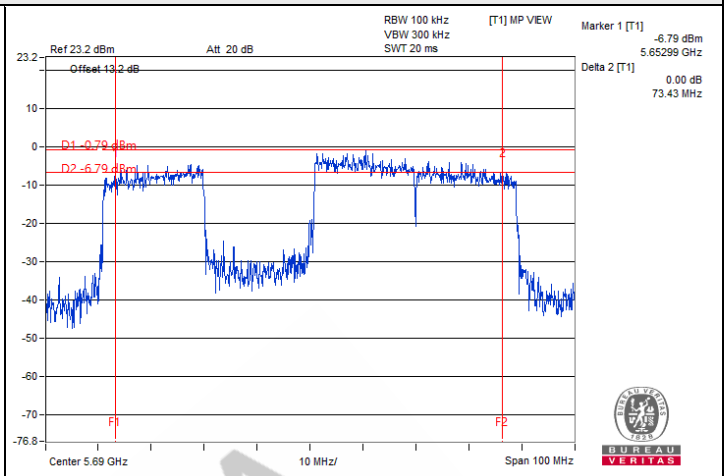

802.11be (EHT80) 484+242-tone MRU / Chain 0 : CH 138@2 (U-NII-3)

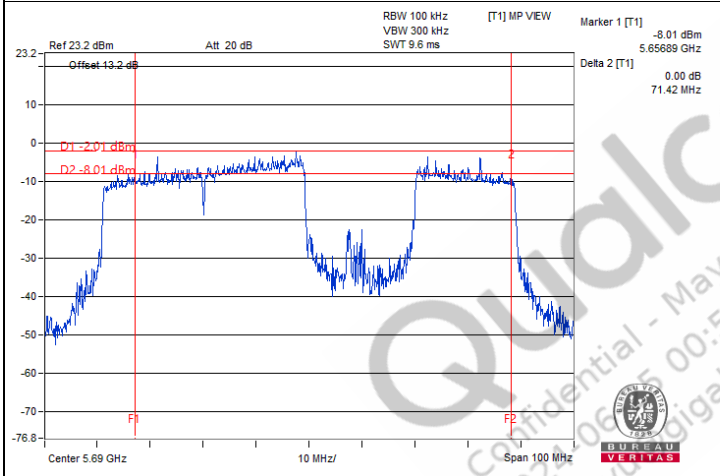

802.11be (EHT80) Punctured by 20 MHz / Chain 0 : CH 138@2 (U-NII-3)

Notes:

1. For U-NII-3 straddle channel = Marker 1 + Delta 2 - 5725 MHz

Qualcomm Confidential - May Contain Trade Secrets 2022-06-15 00:58:32 GMT verdyun@gigabyte.com

7.5 Occupied Bandwidth

Mode A

Input Power:	3.3 Vdc	Environmental Conditions:	24°C, 65% RH	Tested By:	Eric Peng

802.11a

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	16.86	16.80
40	5200	16.80	16.80
48	5240	16.80	16.68
52	5260	16.80	16.86
60	5300	16.80	16.74
64	5320	16.80	16.74
100	5500	16.74	16.74
116	5580	16.74	16.80
140	5700	16.80	16.80
144 (U-NII-2C)	5720	13.40	13.40
144 (U-NII-3)	5720	3.34	3.34
149	5745	16.74	16.74
157	5785	16.68	16.80
165	5825	16.80	16.80

802.11be (EHT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	18.96	18.96
40	5200	18.96	18.96
48	5240	19.02	18.96
52	5260	19.02	18.90
60	5300	19.02	18.96
64	5320	18.90	18.90
100	5500	19.02	18.96
116	5580	18.96	18.90
140	5700	19.02	18.90
144 (U-NII-2C)	5720	14.54	14.54
144 (U-NII-3)	5720	4.36	4.42
149	5745	19.02	19.02
157	5785	18.96	18.90
165	5825	18.90	18.96

QualcOMM Confidential - May Contain Trade Secrets 2024-06-25 06:53:32 GMT vera.yu@dongguan.com

802.11be (EHT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
38	5190	37.92	37.92
46	5230	37.92	37.92
54	5270	37.92	37.92
62	5310	37.68	37.92
102	5510	38.04	38.04
110	5550	37.92	38.04
134	5670	38.04	38.04
142 (U-NII-2C)	5710	34.08	34.08
142 (U-NII-3)	5710	3.96	4.08
151	5755	37.92	37.92
159	5795	38.04	38.04

802.11be (EHT80)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	76.56	76.56
58	5290	76.80	76.56
106	5530	77.04	76.56
122	5610	76.80	76.80
138 (U-NII-2C)	5690	73.40	73.40
138 (U-NII-3)	5690	3.40	3.40
155	5775	77.04	76.80

802.11be (EHT160)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-1)	5250	78.72	78.24
50 (U-NII-2A)	5250	78.24	78.72
114	5570	156.96	156.48

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 01:58:39 GMT vera.yu@gigabyte.com

802.11be (EHT20) 26-tone RU

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	18.30	17.70
40	5200	17.88	18.24
48	5240	18.36	18.36
52	5260	18.36	18.24
60	5300	18.24	18.24
64	5320	18.48	18.36
100	5500	18.30	18.00
116	5580	17.94	16.74
140	5700	18.12	18.12
144 (U-NII-2C)	5720	13.16	13.52
144 (U-NII-3)	5720	4.96	4.90
149	5745	18.18	18.36
157	5785	18.12	18.00
165	5825	18.00	18.18

802.11be (EHT20) 52-tone RU

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	18.12	17.70
40	5200	17.94	17.88
48	5240	18.06	18.12
52	5260	18.12	18.24
60	5300	18.12	18.00
64	5320	18.12	17.94
100	5500	17.58	17.64
116	5580	17.94	18.18
140	5700	18.24	18.00
144 (U-NII-2C)	5720	12.98	13.40
144 (U-NII-3)	5720	4.66	4.66
149	5745	18.06	17.10
157	5785	17.34	18.06
165	5825	18.24	18.00

QualcOMM Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigaimate.com

802.11be (EHT20) 106-tone RU

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
36	5180	17.88	17.88
40	5200	17.94	17.58
48	5240	17.82	17.70
52	5260	18.00	18.24
60	5300	18.00	17.94
64	5320	17.94	17.76
100	5500	17.94	17.82
116	5580	18.06	17.88
140	5700	17.34	17.76
144 (U-NII-2C)	5720	13.16	13.46
144 (U-NII-3)	5720	4.54	4.54
149	5745	17.70	17.34
157	5785	17.34	17.88
165	5825	17.82	17.04

802.11be (EHT80) 484+242-tone MRU

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
138 (U-NII-2C)	5690	73.40	73.64
138 (U-NII-3)	5690	3.64	3.64
155	5775	77.52	77.76

802.11be (EHT160) 996+484-tone MRU

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-1)	5250	78.72	78.72
50 (U-NII-2A)	5250	78.72	78.72

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

802.11be (EHT80) Punctured by 20 MHz

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
42	5210	77.28	77.52
58	5290	77.28	77.28
138 (U-NII-2C)	5690	73.64	73.64
138 (U-NII-3)	5690	3.64	3.88
155	5775	77.52	77.28


802.11be (EHT160) Punctured by 20 MHz

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-1)	5250	78.72	78.72
50 (U-NII-2A)	5250	78.72	78.72


802.11be (EHT160) Punctured by 40 MHz

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	
		Chain 0	Chain 1
50 (U-NII-1)	5250	78.72	79.20
50 (U-NII-2A)	5250	79.20	79.20

Spectrum Plot of Maximum Value

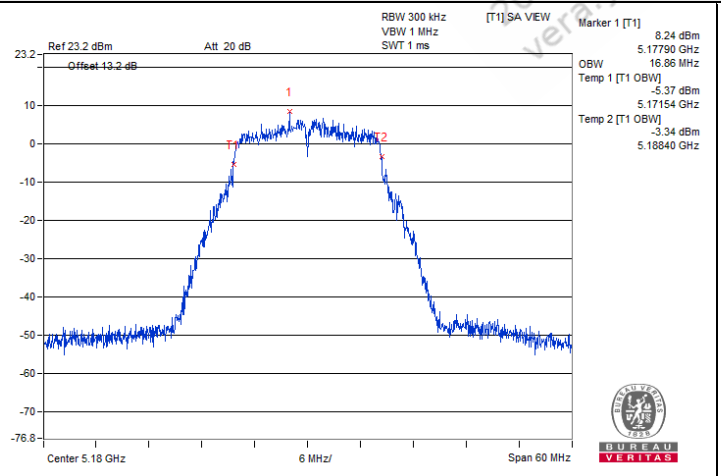


802.11a / Chain 0 : CH 36

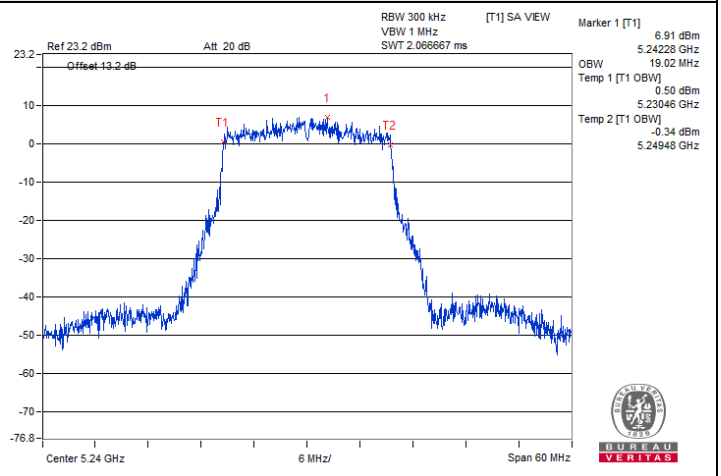


802.11be (EHT20) / Chain 0 : CH 48

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT verify @gigabyte.com


Spectrum Plot of Maximum Value

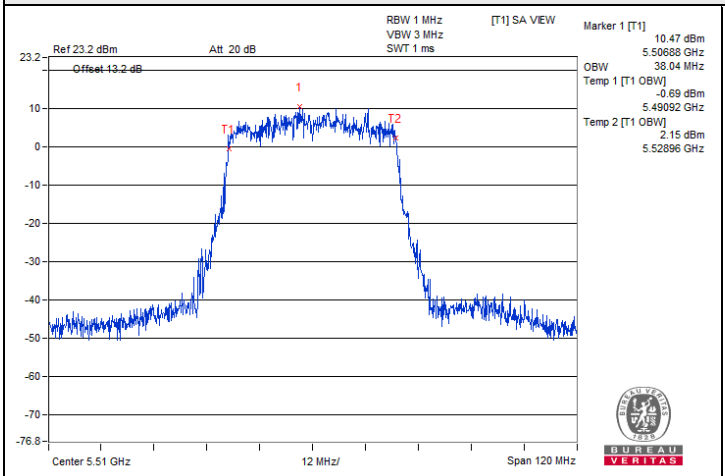


802.11be (EHT40) / Chain 0 : CH 102

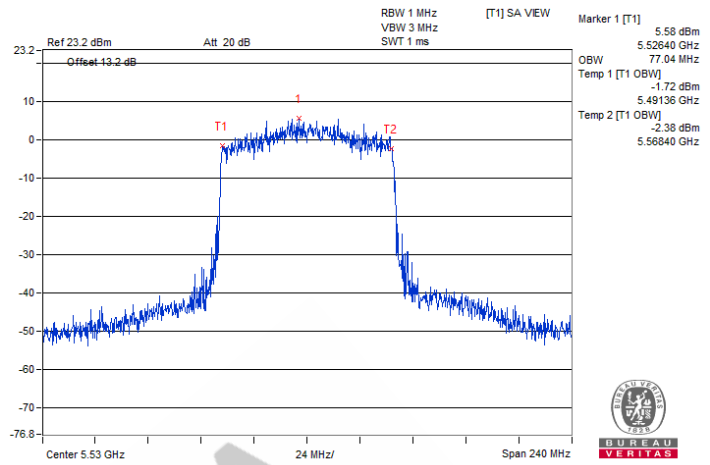


802.11be (EHT80) / Chain 0 : CH 106

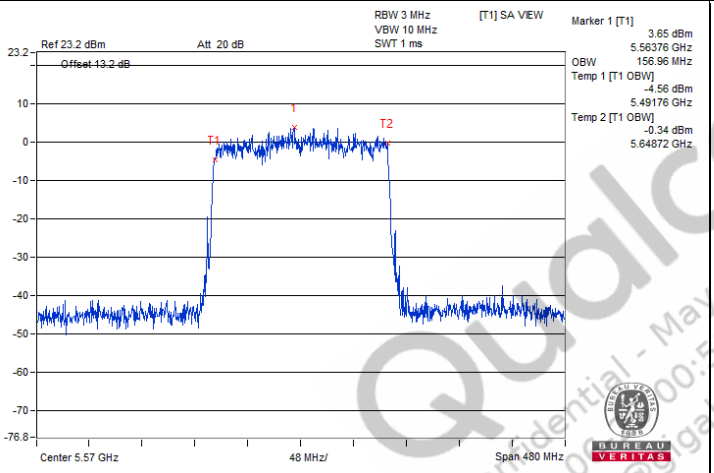


802.11be (EHT160) / Chain 0 : CH 114

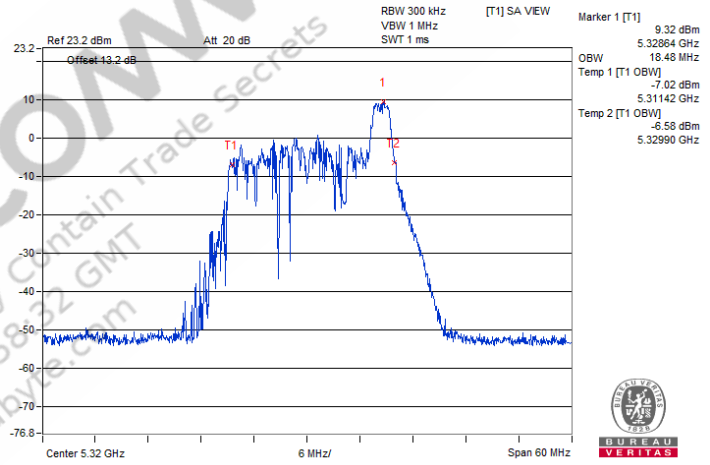

802.11be (EHT20) 26-tone RU / Chain 0 : CH 64@8

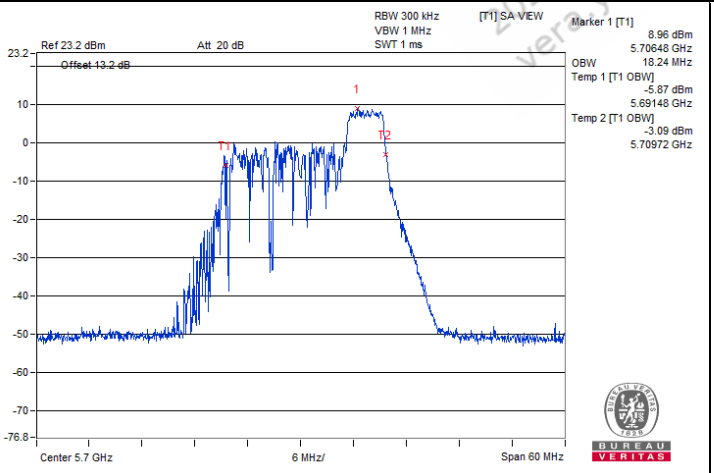


802.11be (EHT20) 52-tone RU / Chain 0 : CH 140@40

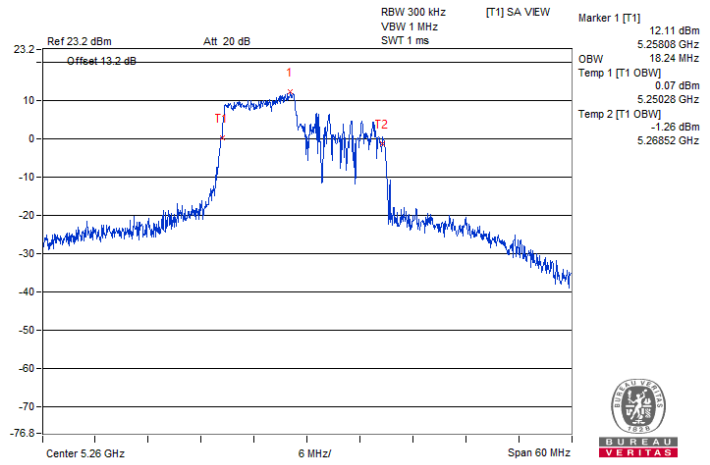


802.11be (EHT20) 106-tone RU / Chain 1 : CH 52@53

Qualcomm
Confidential - May Contain Trade Secrets
2021-09-30 00:58:32 GMT
vernyu@qualcomm.com


Spectrum Plot of Maximum Value

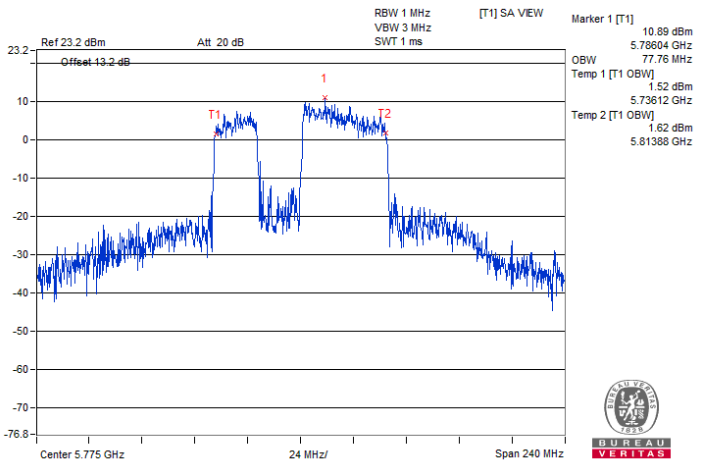


802.11be (EHT80) 484+242-tone MRU / Chain 1 : CH 155@3

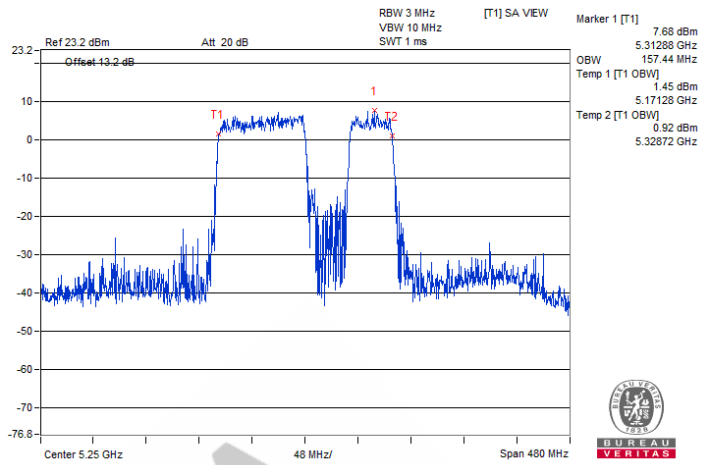


802.11be (EHT160) 996+484-tone MRU / Chain 0 : CH 50@2 (U-NII-1)

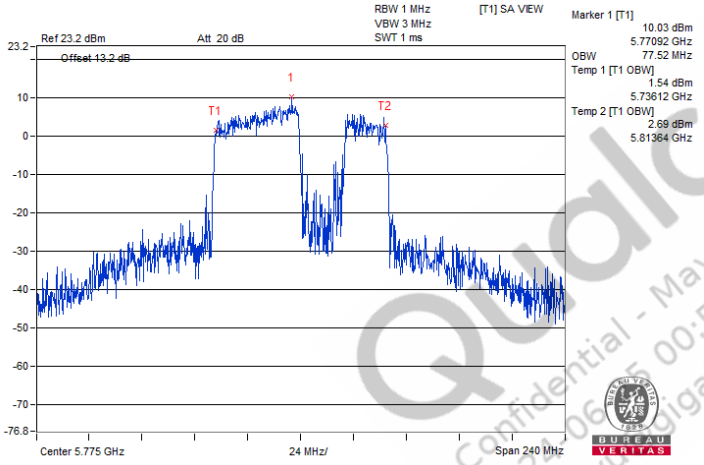

802.11be (EHT80) Punctured by 20 MHz / Chain 0 : CH 155@3

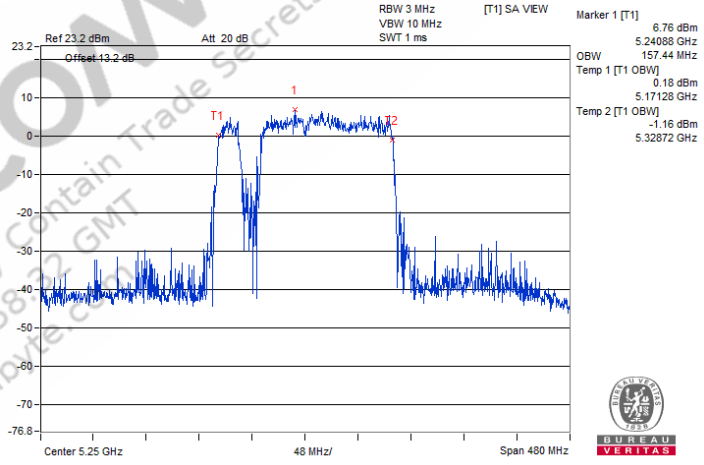

802.11be (EHT160) Punctured by 20 MHz / Chain 0 : CH 50@4 (U-NII-1)

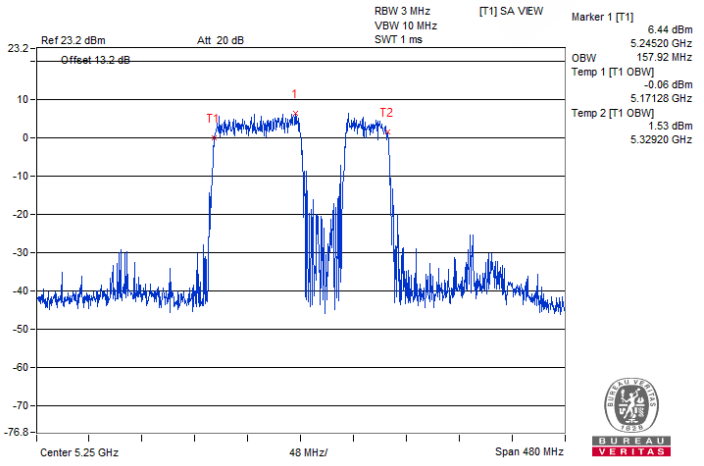

802.11be (EHT160) Punctured by 40 MHz / Chain 0 : CH 50@10 (U-NII-2A)


Notes:

1. For U-NII-1 straddle channel = 5250 MHz - Marker 1
2. For U-NII-2A straddle channel = Marker 1 + Delta 2 - 5250 MHz


Qualcomm Confidential - May Contain Trade Secrets 2022-06-15 00:58:32 GMT version v0.gigabyte.com

Spectrum Plot for nearby DFS band


(DFS is required, if 99% OCP straddle into U-NII-2A)

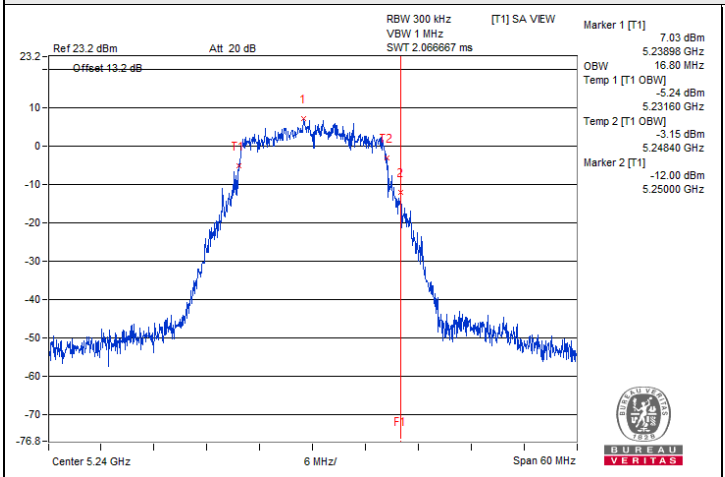


802.11a / Chain 0 : CH 48

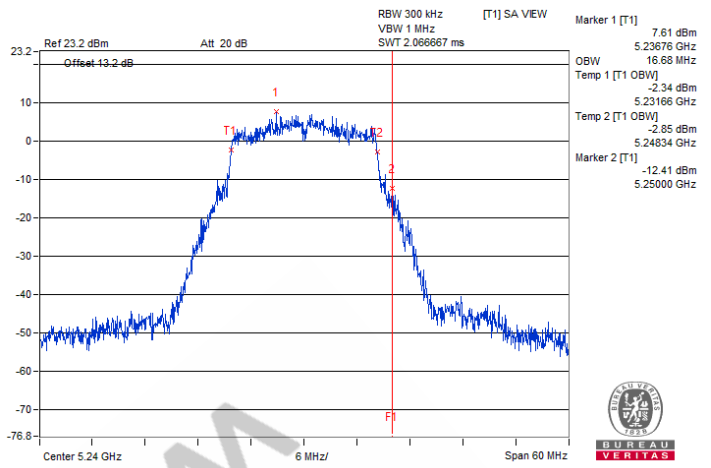


802.11a / Chain 1 : CH 48

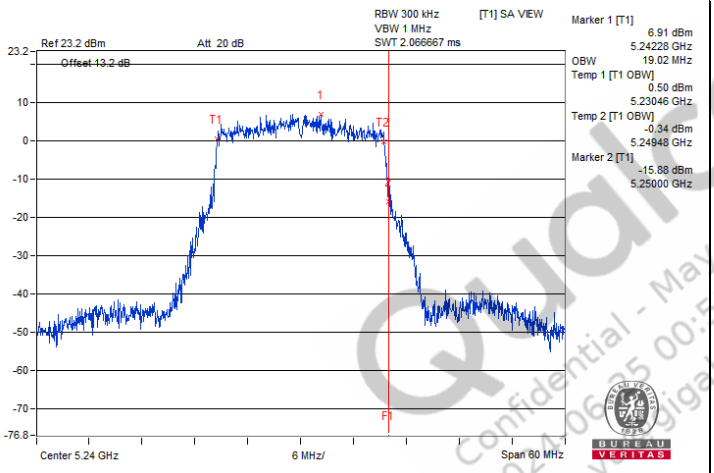


802.11be (EHT20) / Chain 0 : CH 48

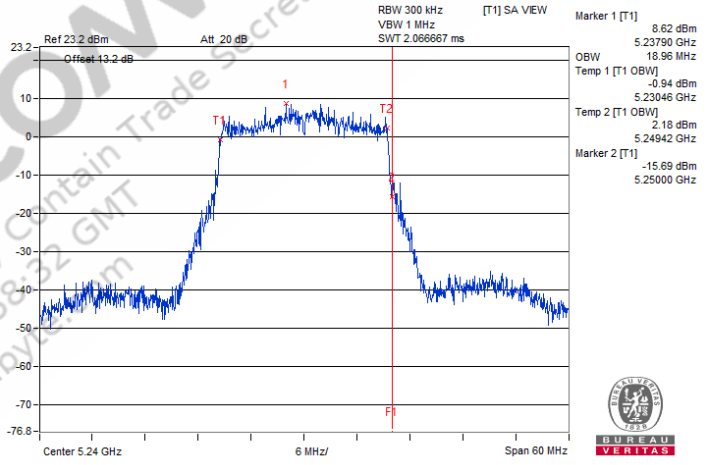

802.11be (EHT20) / Chain 1 : CH 48

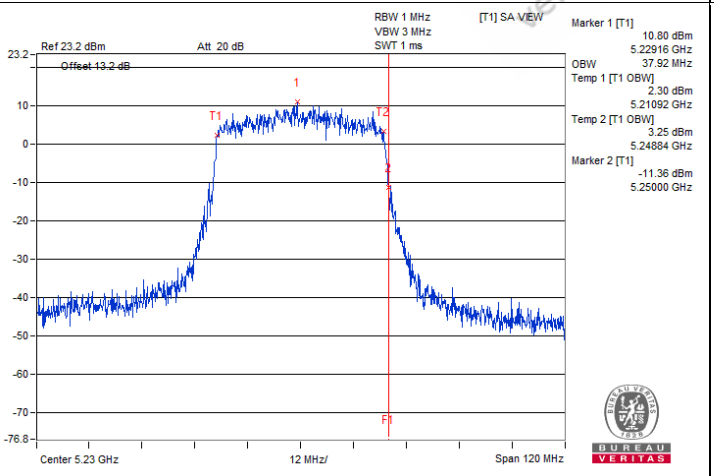

802.11be (EHT40) / Chain 0 : CH 46

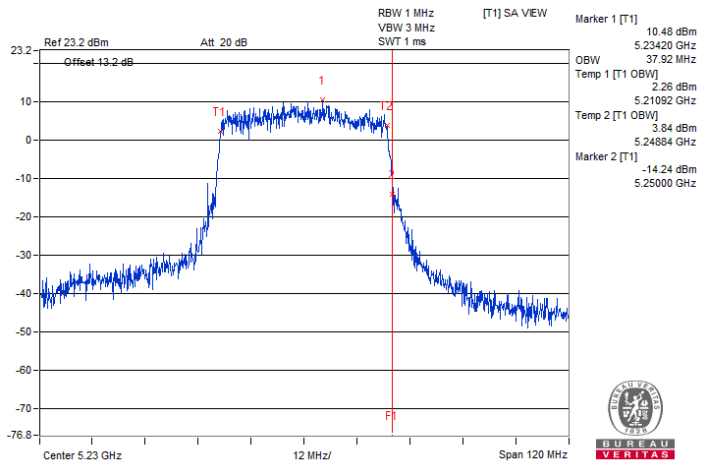


802.11be (EHT40) / Chain 1 : CH 46


Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
sera.yu@gigalyte.com

Spectrum Plot for nearby DFS band


(DFS is required, if 99% OCP straddle into U-NII-2A)

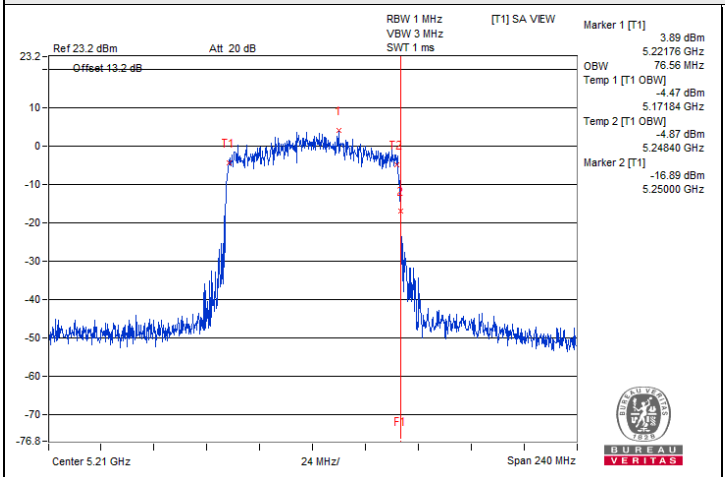


802.11be (EHT80) / Chain 0 : CH 42

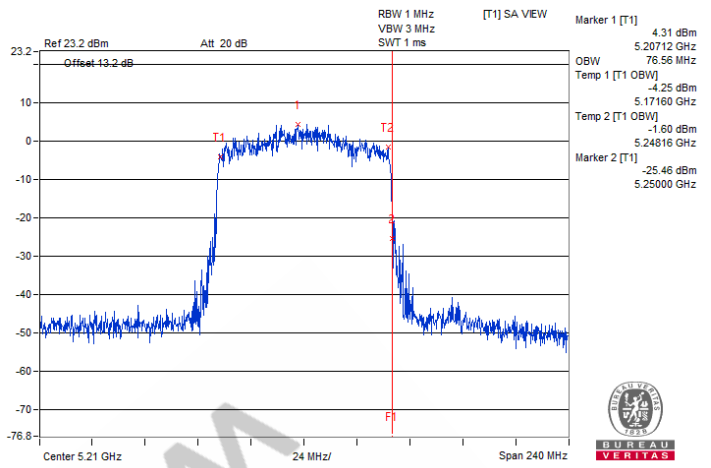


802.11be (EHT80) / Chain 1 : CH 42

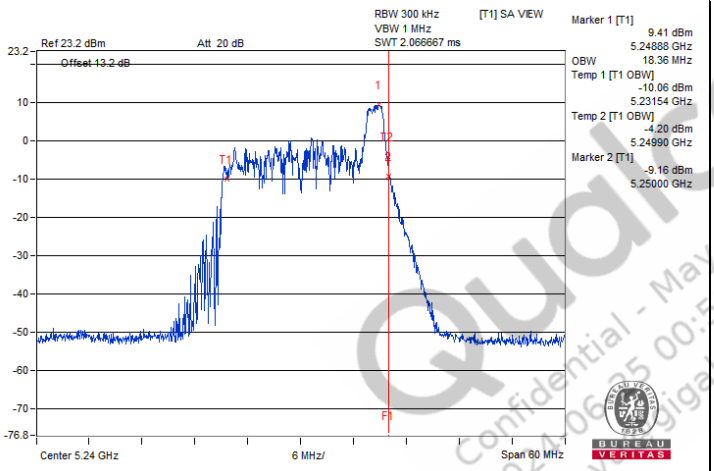


802.11be (EHT20) 26-tone RU / Chain 0 : CH 48@8

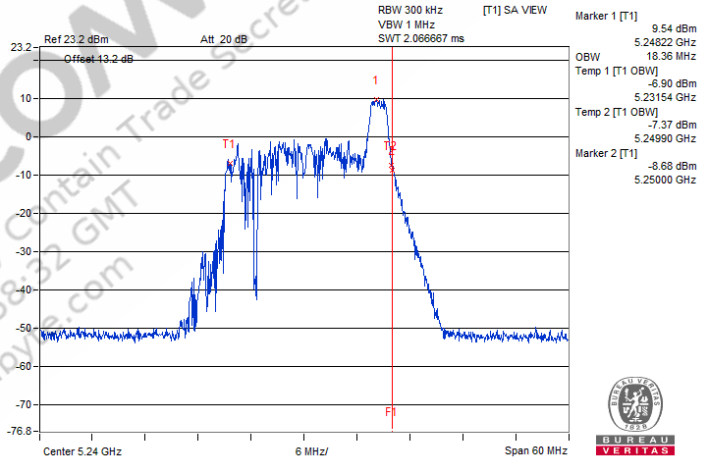

802.11be (EHT20) 26-tone RU / Chain 1 : CH 48@8

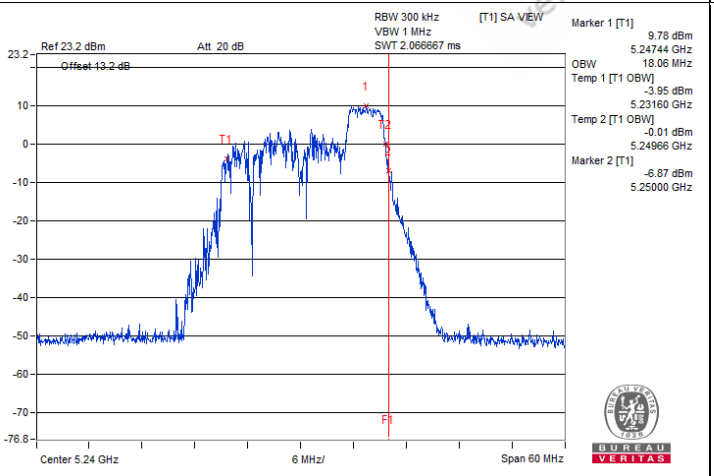

802.11be (EHT20) 52-tone RU / Chain 0 : CH 48@40

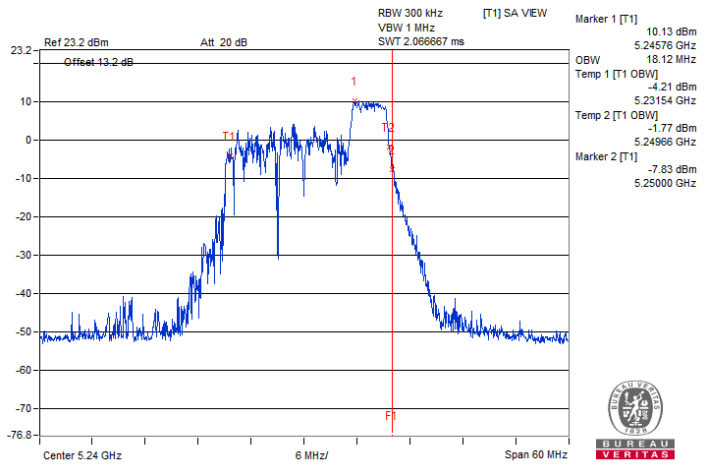


802.11be (EHT20) 52-tone RU / Chain 1 : CH 48@40


QuickCOMM
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
sen.wang@gigalive.com

Spectrum Plot for nearby DFS band


(DFS is required, if 99% OCP straddle into U-NII-2A)

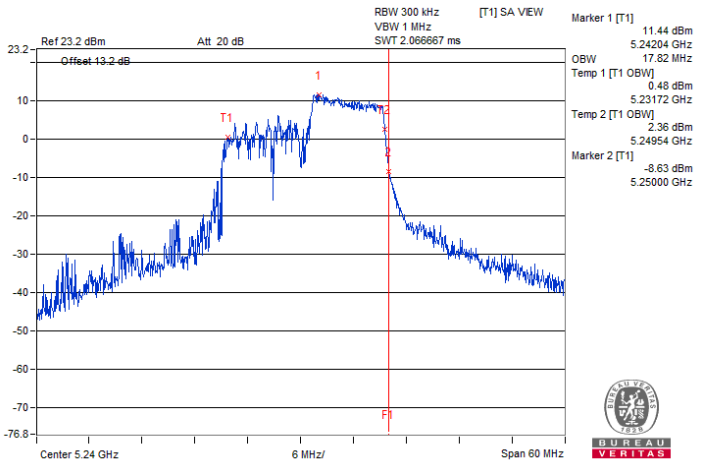


802.11be (EHT20) 106-tone RU / Chain 0 : CH 48@54

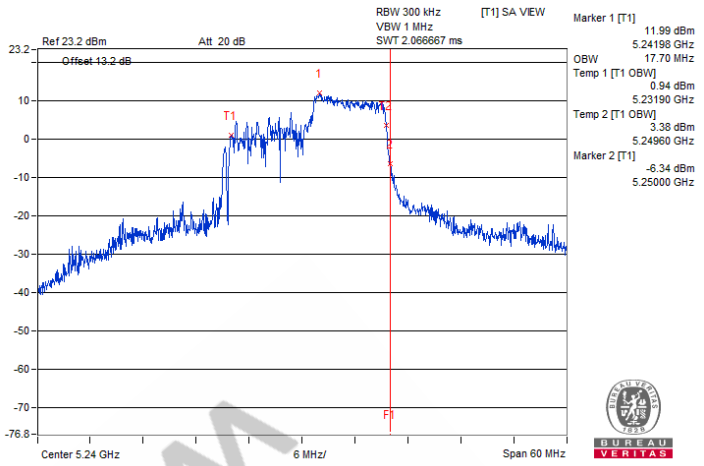

802.11be (EHT20) 106-tone RU / Chain 1 : CH 48@54

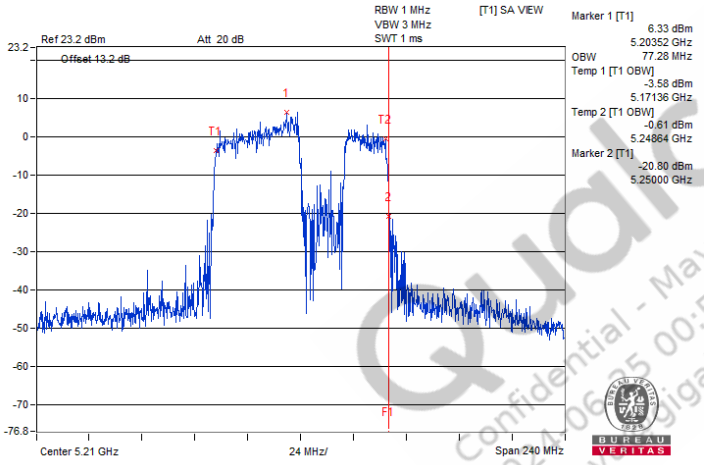

802.11be (EHT80) Punctured by 20 MHz / Chain 0 : CH 42@3

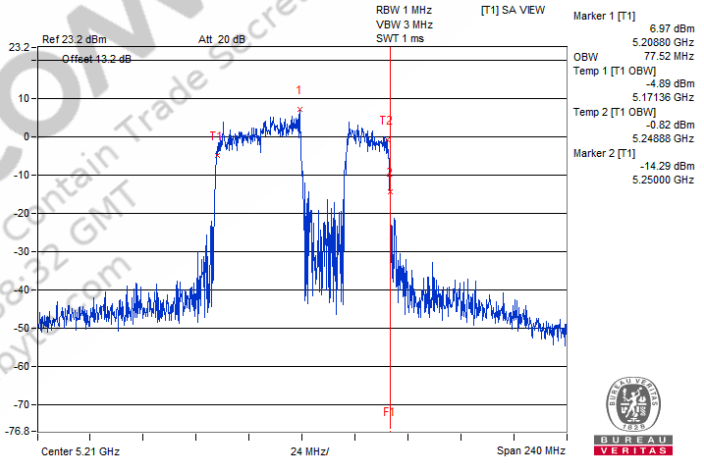


802.11be (EHT80) Punctured by 20 MHz / Chain 1 : CH 42@3


QUALCOMM Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT verify.qualcomm.com

Spectrum Plot for nearby DFS band


(DFS is required, if 99% OCP straddle into U-NII-2C)

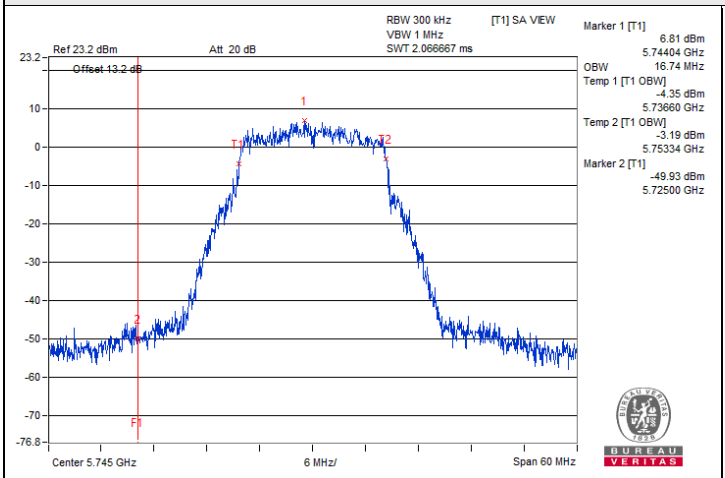


802.11a / Chain 0 : CH 149

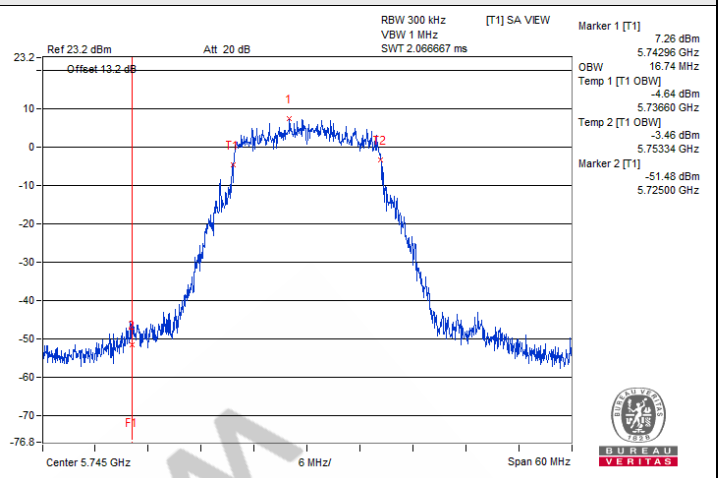


802.11a / Chain 1 : CH 149

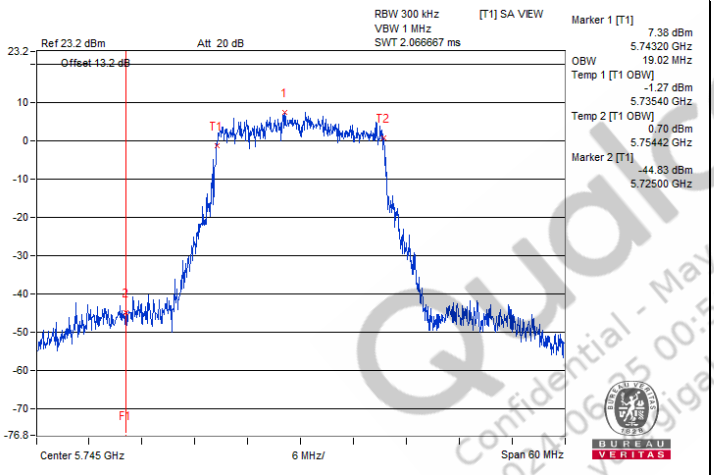


802.11be (EHT20) / Chain 0 : CH 149

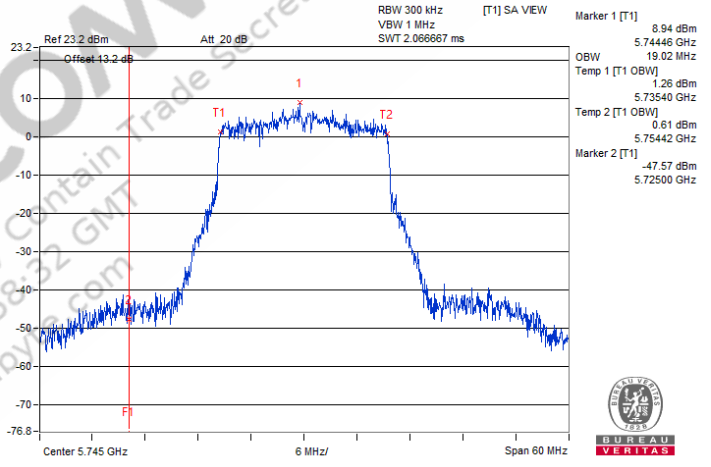

802.11be (EHT20) / Chain 1 : CH 149

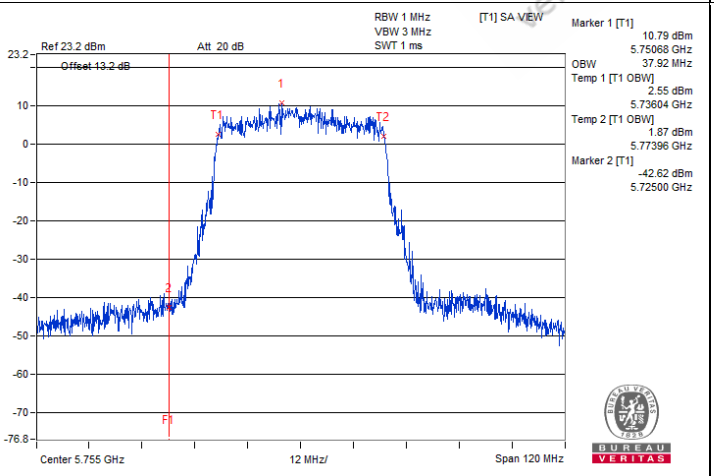

802.11be (EHT40) / Chain 0 : CH 151

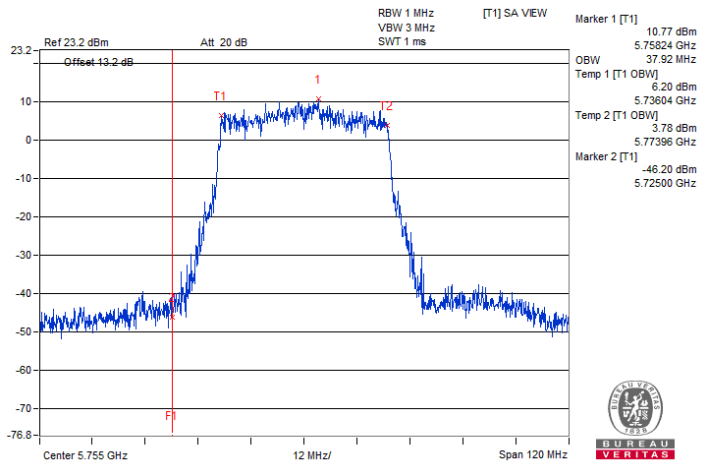


802.11be (EHT40) / Chain 1 : CH 151


QuickCOMM
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
sera.yu@gigalynx.com

Spectrum Plot for nearby DFS band


(DFS is required, if 99% OCP straddle into U-NII-2C)

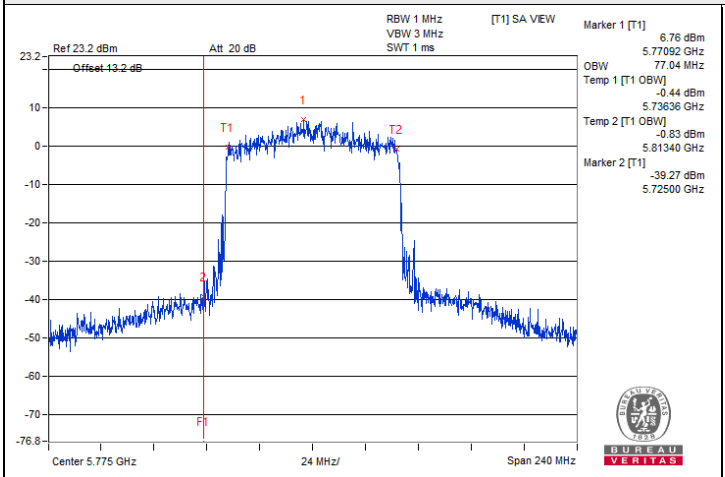


802.11be (EHT80) / Chain 0 : CH 155

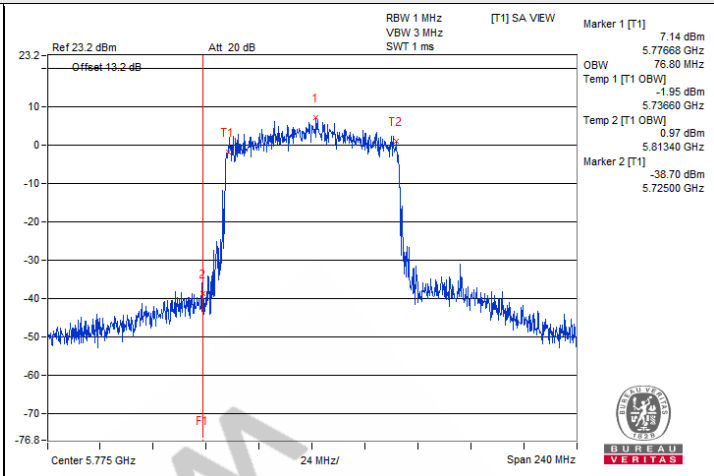


802.11be (EHT80) / Chain 1 : CH 155

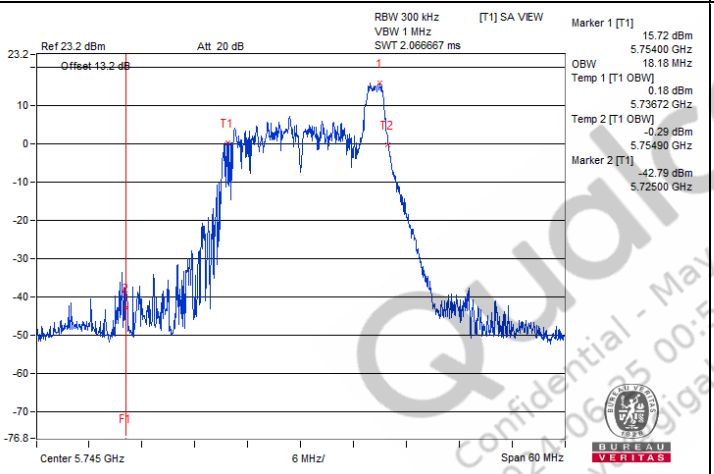


802.11be (EHT20) 26-tone RU / Chain 0 : CH 149@0

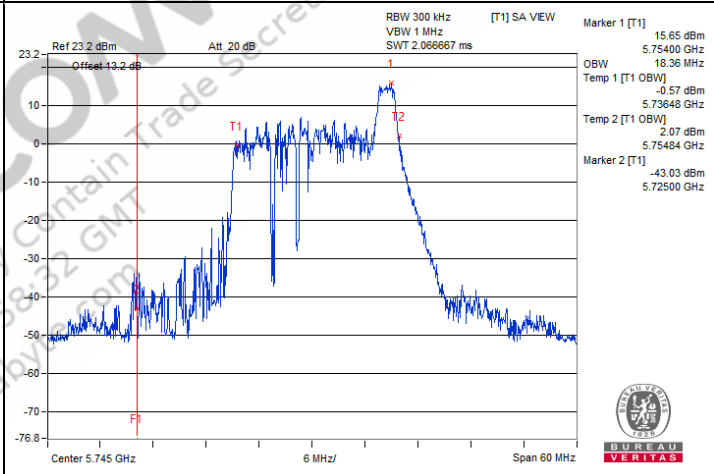

802.11be (EHT20) 26-tone RU / Chain 1 : CH 149@0

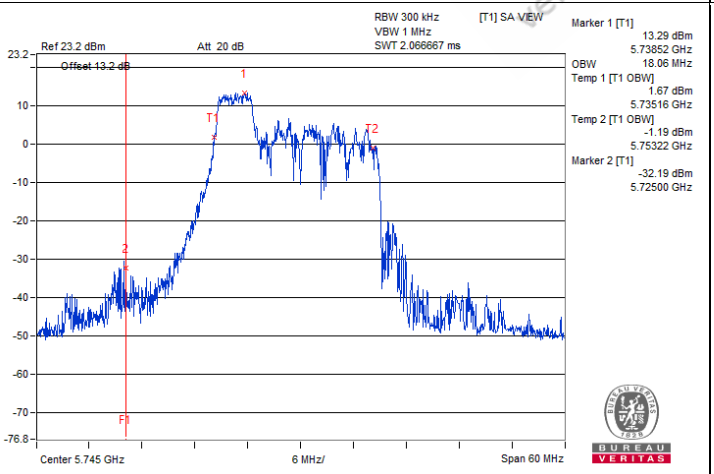

802.11be (EHT20) 52-tone RU / Chain 0 : CH 149@37

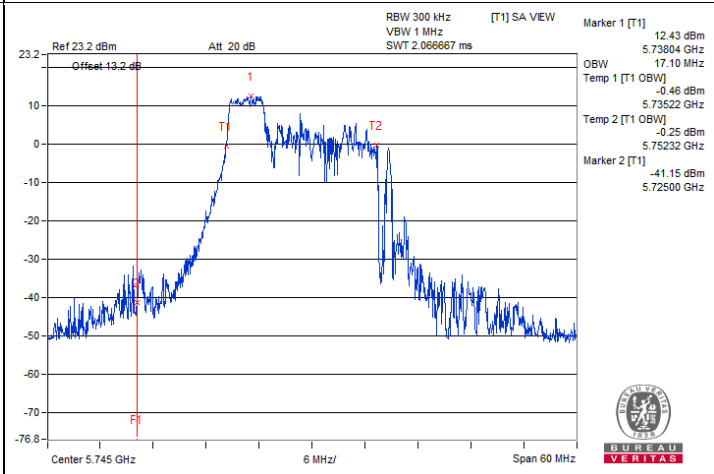


802.11be (EHT20) 52-tone RU / Chain 1 : CH 149@37


QuickCom
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
gigalynx.com

Spectrum Plot for nearby DFS band


(DFS is required, if 99% OCP straddle into U-NII-2C)

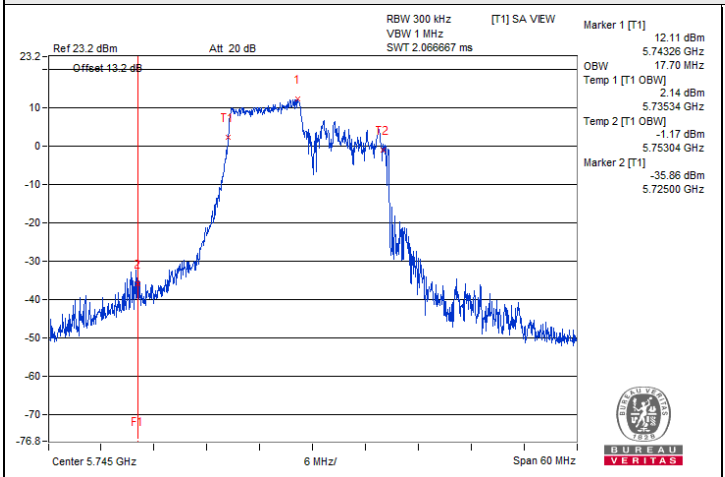


802.11be (EHT20) 106-tone RU / Chain 0 : CH 149@53

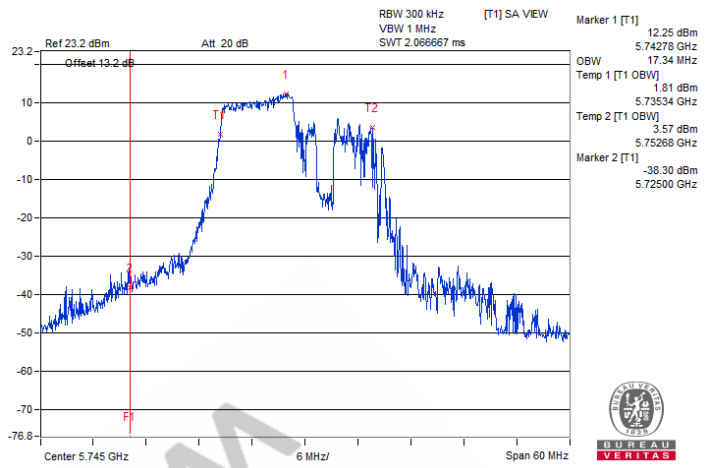


802.11be (EHT20) 106-tone RU / Chain 1 : CH 149@53

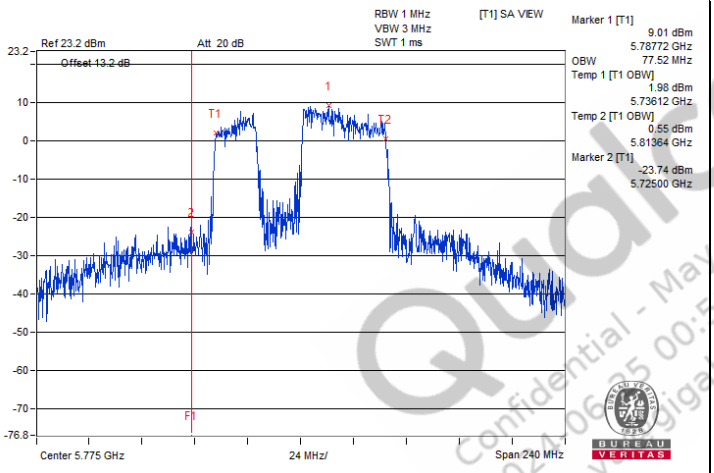


802.11be (EHT80) 484+242-tone MRU / Chain 0 : CH 155@3

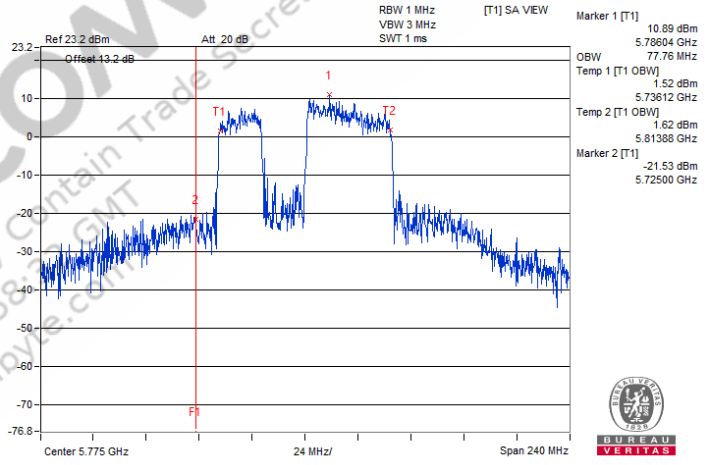

802.11be (EHT80) 484+242-tone MRU / Chain 1 : CH 155@3

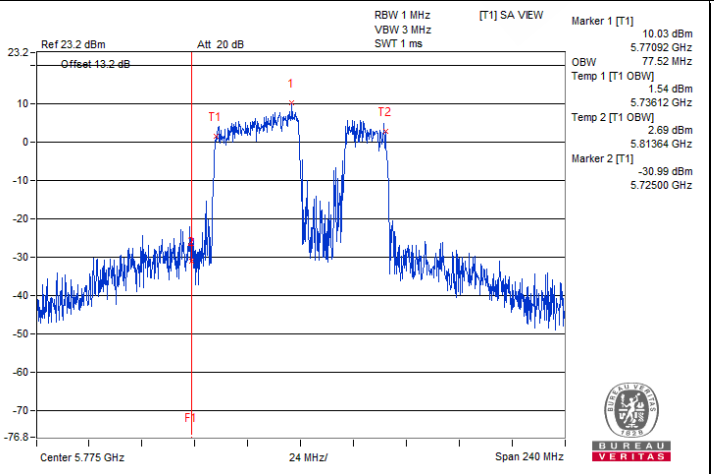

802.11be (EHT80) Punctured by 20 MHz / Chain 0 : CH 155@3

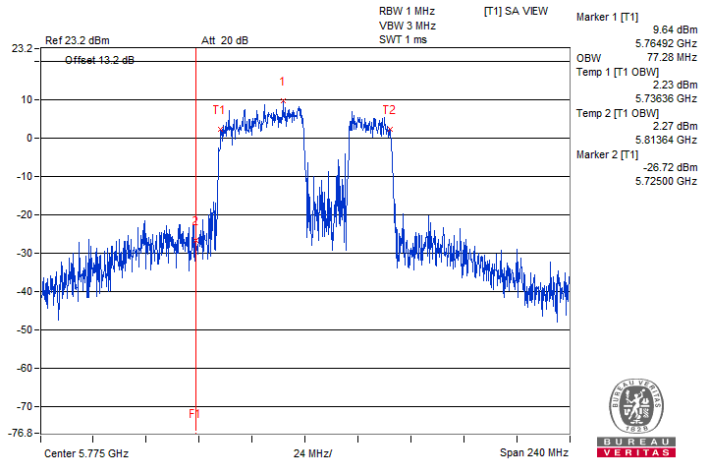

802.11be (EHT80) Punctured by 20 MHz / Chain 1 : CH 155@3

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:25 GMT verify.gigabyte.com

7.6 Frequency Stability

Mode A

Input Power:	3.3 Vdc	Environmental Conditions:	24°C, 65% RH	Tested By:	Eric Peng

802.11a

Frequency Stability Versus Temperature									
Operating Frequency: 5180 MHz									
Temp. (℃)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
70	3.3	5180	Pass	5179.9989	Pass	5180.0009	Pass	5180	Pass
60	3.3	5179.9864	Pass	5179.9875	Pass	5179.9857	Pass	5179.9857	Pass
50	3.3	5179.9821	Pass	5179.9797	Pass	5179.9819	Pass	5179.978	Pass
40	3.3	5179.9934	Pass	5179.99	Pass	5179.9886	Pass	5179.989	Pass
30	3.3	5180.0051	Pass	5180.0048	Pass	5180.0042	Pass	5180.0061	Pass
20	3.3	5180.0028	Pass	5179.9998	Pass	5180.0023	Pass	5180.0029	Pass
10	3.3	5180.0177	Pass	5180.018	Pass	5180.0194	Pass	5180.0216	Pass
0	3.3	5180.0181	Pass	5180.0191	Pass	5180.0185	Pass	5180.0215	Pass
-10	3.3	5179.9751	Pass	5179.9771	Pass	5179.9739	Pass	5179.9733	Pass

Frequency Stability Versus Voltage									
Operating Frequency: 5180 MHz									
Temp. (℃)	Power Supply (Vdc)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result	Measured Frequency (MHz)	Test Result
20	3.795	5180.0094	Pass	5180.0103	Pass	5180.0104	Pass	5180.0102	Pass
	3.3	5180.0028	Pass	5179.9998	Pass	5180.0023	Pass	5180.0029	Pass
	2.805	5180.0063	Pass	5180.0056	Pass	5180.0063	Pass	5180.0093	Pass

QuicComm Confidential - May Contain Trade Secrets 2024-05-25 06:55:53 GMT verasure@bureauveritas.com

7.7 AC Power Conducted Emissions


Mode B

RF Mode	802.11be (EHT20)	Channel	CH 116：5580 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Carter Lin		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15393	9.96	31.85	24.46	41.81	34.42	65.79	55.79	-23.98	-21.37
2	**0.56795**	**9.98**	**32.92**	**26.27**	**42.90**	**36.25**	**56.00**	**46.00**	**-13.10**	**-9.75**
3	0.89602	9.99	19.95	16.30	29.94	26.29	56.00	46.00	-26.06	-19.71
4	1.62898	10.03	22.47	18.14	32.50	28.17	56.00	46.00	-23.50	-17.83
5	14.52734	10.77	27.41	20.81	38.18	31.58	60.00	50.00	-21.82	-18.42
6	26.62102	11.21	33.18	28.34	44.39	39.55	60.00	50.00	-15.61	-10.45

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

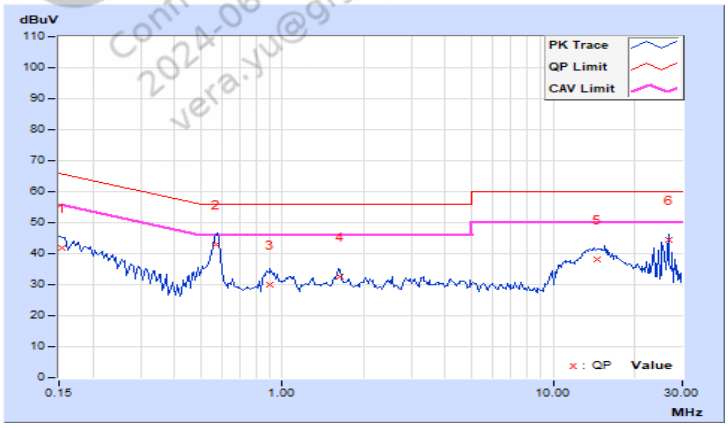


Confidential - May contain Trade Secrets
2024-06-25 00:58:32 IT
vera.yu@gigavrte.com

RF Mode	802.11be (EHT20)	Channel	CH 116：5580 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 75% RH
Tested By	Carter Lin		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15395	9.93	32.88	19.57	42.81	29.50	65.78	55.78	-22.97	-26.28
2	0.23208	9.94	24.93	10.12	34.87	20.06	62.37	52.37	-27.50	-32.31
3	0.57961	9.95	27.14	18.38	37.09	28.33	56.00	46.00	-18.91	-17.67
4	0.88044	9.96	14.67	2.99	24.63	12.95	56.00	46.00	-31.37	-33.05
5	14.17963	10.57	20.38	13.27	30.95	23.84	60.00	50.00	-29.05	-26.16
6	25.85935	10.86	24.44	18.14	35.30	29.00	60.00	50.00	-24.70	-21.00

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

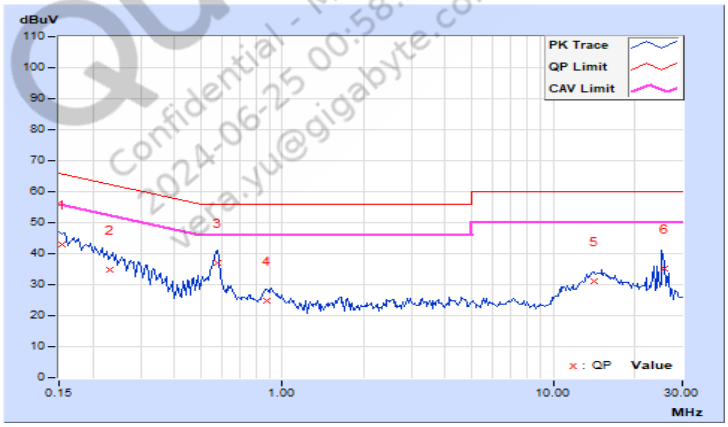

QUALCOMM Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

7.8 Unwanted Emissions below 1 GHz

Radiated versus Conducted Measurement
For Radiated measurement: The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation) For Conducted measurement: The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

Conducted Emission Convert Formula
a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8 d = measurement distance in 3 meters. b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB) c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands. For the band edge the gain for the specific band may have been used. Notes: 1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection: For f = 30 – 1000 MHz, add 4.7 dB. 2. The conducted emission test was considered some factor to compute test result.

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 10:58:35 GMT vera.yu@gigatrue.com

Mode A

802.11be (EHT20) - Channel 116


Conducted spurious emission table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	66.86	27.22	40	-12.78	-79	-79.45	8.17	-68.04
2	120.69	27.66	43.5	-15.84	-79.91	-77.88	8.17	-67.60
3	246.18	27.44	46	-18.56	-79.8	-78.32	8.17	-67.82
4	442.73	27.93	46	-18.07	-80.3	-77.24	8.17	-67.33
5	757.62	28.39	46	-17.61	-80.43	-76.52	8.17	-66.87
6	907.36	28.89	46	-17.11	-78.73	-76.63	8.17	-66.37


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

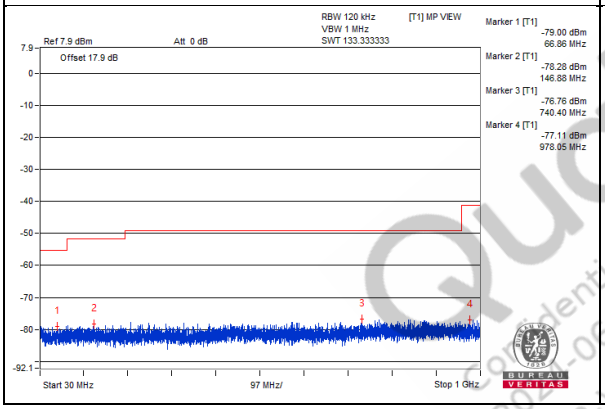

Chain 1

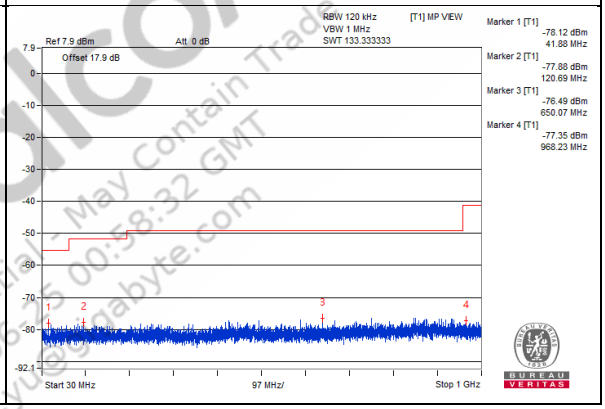

Qualcomm Confidential - May Contain Trade Secrets 2021-06-25 00:58:32 GMT verayue@gabyte.com


Mode B

RF Mode	802.11be (EHT20)	Channel	CH 116：5580 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	35.58	33.6 QP	40.0	-6.4	3.00 H	285	47.2	-13.6
2	108.57	37.2 QP	43.5	-6.3	2.00 H	316	53.2	-16.0
3	217.10	35.3 QP	46.0	-10.7	1.00 H	154	51.2	-15.9
4	**295.42**	**41.6 QP**	**46.0**	**-4.4**	**1.00 H**	**173**	**54.0**	**-12.4**
5	450.94	26.9 QP	46.0	-19.1	2.00 H	308	35.1	-8.2
6	497.77	38.0 QP	46.0	-8.0	1.50 H	185	45.6	-7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

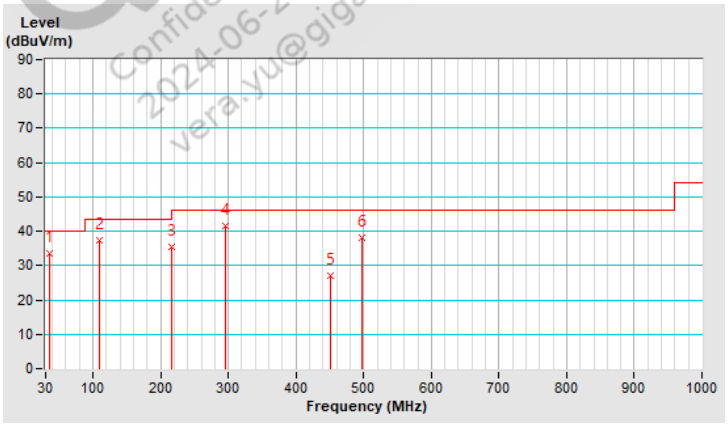


Qmicom
Confidential Mail Contain Trade Secrets
2024-06-25 20:32:39 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	**Channel**	CH 116：5580 MHz
Frequency Range	30 MHz ~ 1 GHz	**Detector Function & Bandwidth**	(QP) RB = 120kHz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	29°C, 78% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	34.71	33.7 QP	40.0	-6.3	3.00 V	270	47.3	-13.6
2	104.23	38.3 QP	43.5	-5.2	2.00 V	318	55.0	-16.7
3	198.52	36.5 QP	43.5	-7.0	1.50 V	165	52.6	-16.1
4	296.21	39.4 QP	46.0	-6.6	1.00 V	193	51.8	-12.4
5	414.56	30.4 QP	46.0	-15.6	2.00 V	201	39.9	-9.5
6	497.94	39.5 QP	46.0	-6.5	1.50 V	316	47.1	-7.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

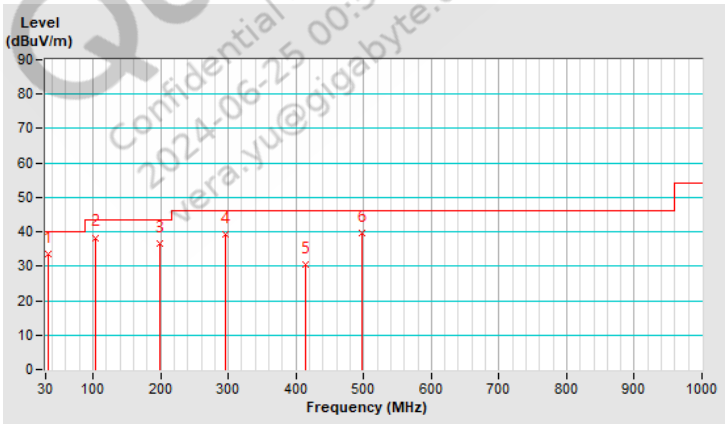

Qualcomm Confidential - Proprietary Trade Secrets 2024-06-25 00:58:27 vera.yu@gigabyte.com

7.9 Unwanted Emissions above 1 GHz

Radiated versus Conducted Measurement
For Radiated measurement: The level of unwanted emissions was measured when radiated by the cabinet or structure of the equipment with the antenna connector(s) terminated by a specified load (cabinet radiation) For Conducted measurement: The level of unwanted emissions was measured as their power in a specified load (conducted spurious emissions).

Conducted Emission Convert Formula
a. Emission Level (dBuV/m) = EIRP Level (dBm) – 20log(d) + 104.8 d = measurement distance in 3 meters. b. EIRP Level (dBm) = Raw Value(dBm) + Correction Factor(dB) c. Correction Factor is directional gain, and the composite gain will be used when signal support the correlated signal For the out of band spurious the gain for the specific band may have been used rather than the highest gain across all bands. For the band edge the gain for the specific band may have been used. Notes: 1. In restricted bands below 1000 MHz, add upper bound on ground plane reflection: For f = 30 – 1000 MHz, add 4.7 dB. 2. The conducted emission test was considered some factor to compute test result.

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 10:58:35 GMT vera.yu@gigatrue.com

Mode A

Above 1GHz Data

802.11a - Channel 36

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3470.31	58.75 PK	68.2	-9.45	-47.22	-48.21	8.17	-36.51
2	#6920.31	58.34 PK	68.2	-9.86	-47.55	-48.72	8.17	-36.92
3	#10351.56	58.73 PK	68.2	-9.47	-49.14	-46.63	8.17	-36.53
4	15526.87	49.39 PK	74	-24.61	-58.81	-55.8	8.17	-45.87
5	15542.68	39.06 AV	54	-14.94	-67.45	-67.31	8.17	-56.20


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

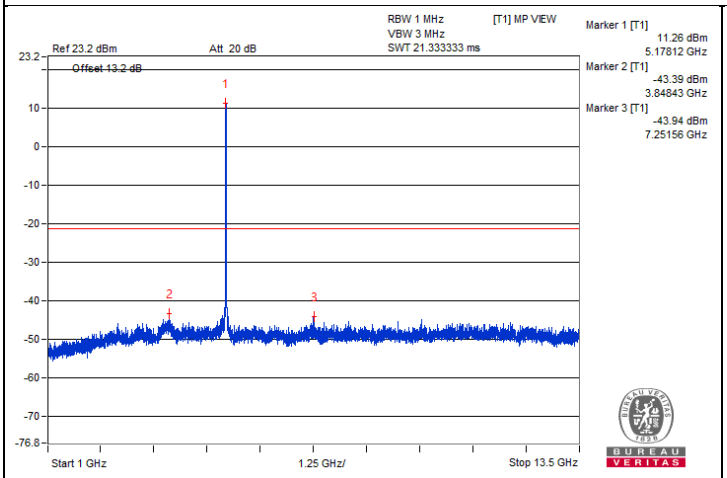


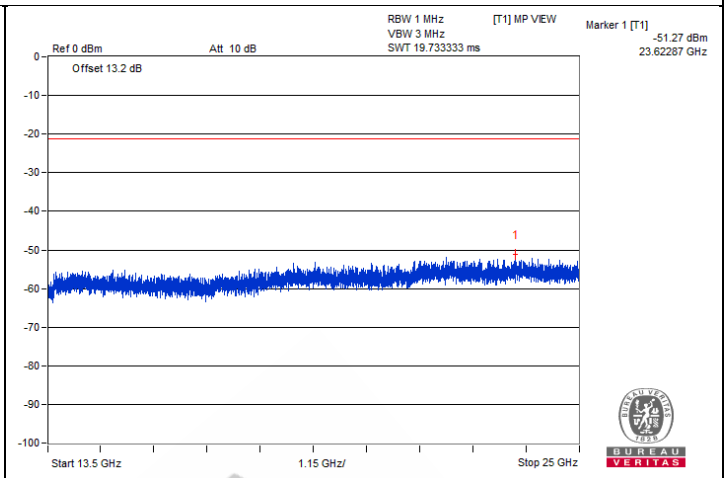

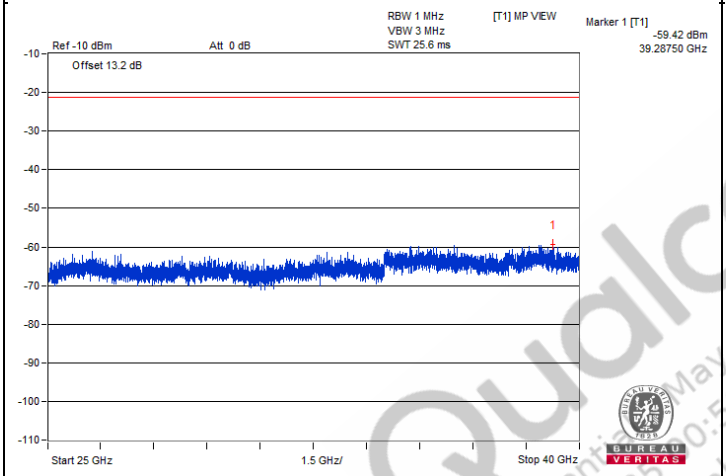

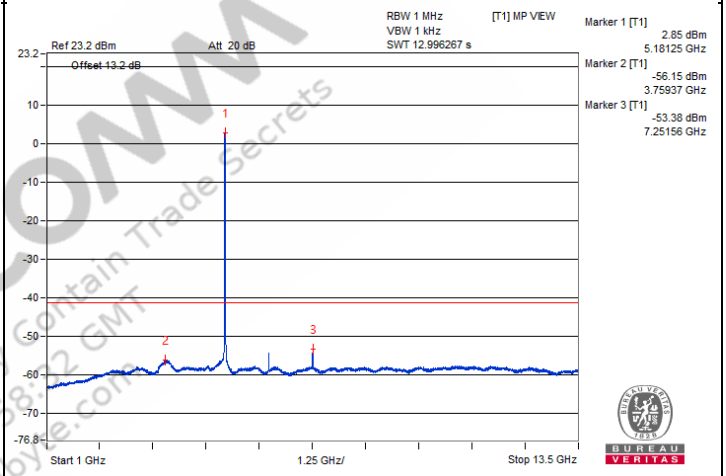


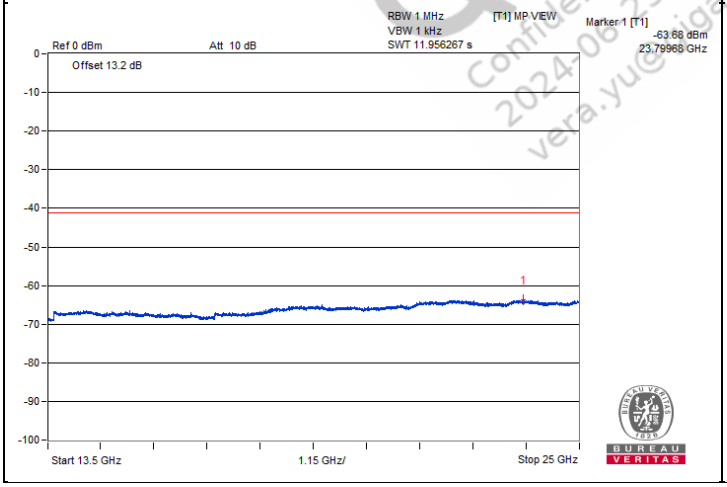


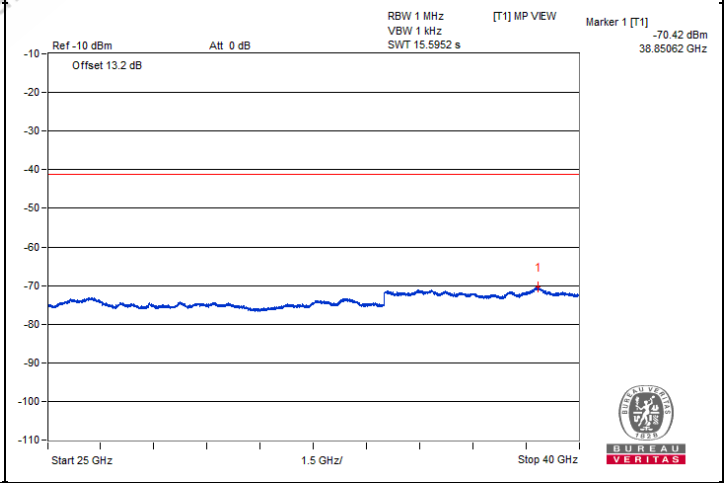



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

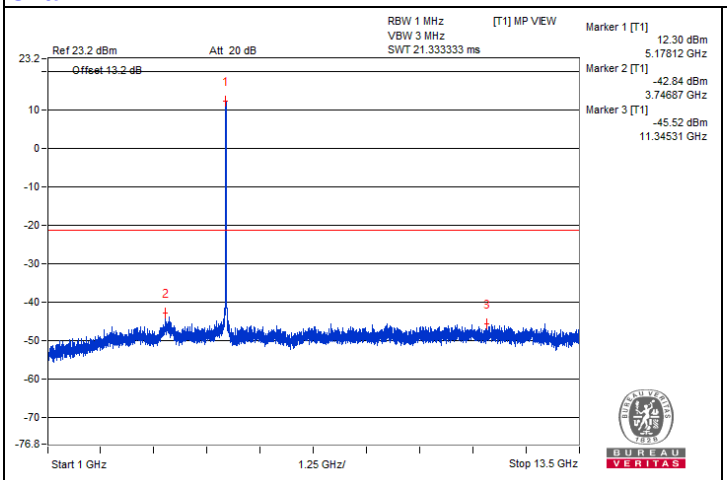


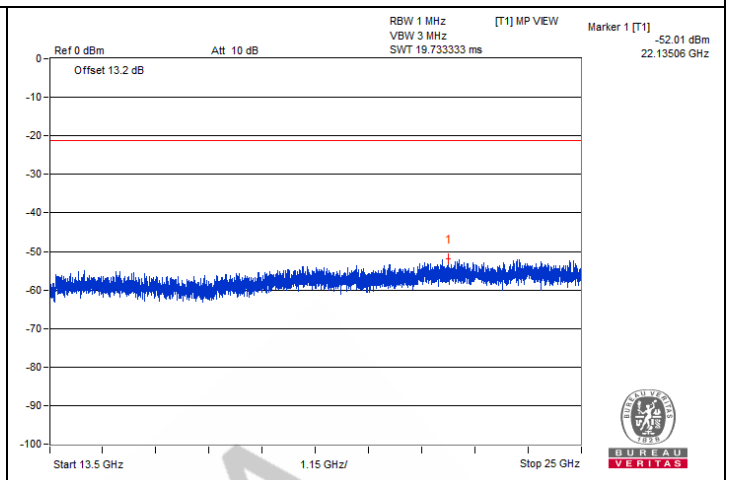

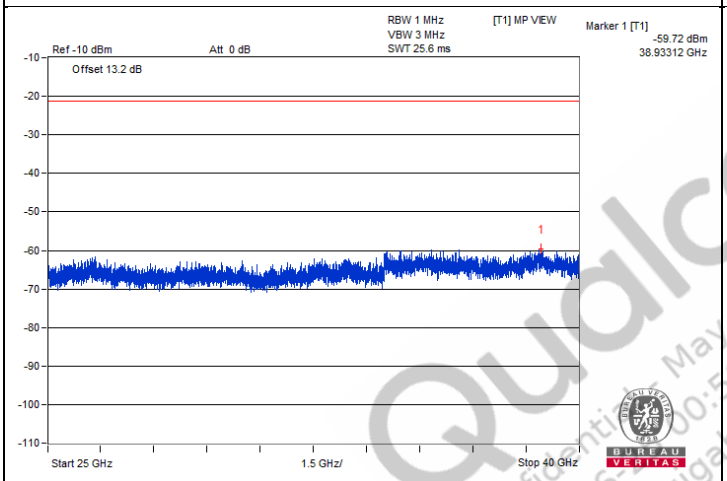

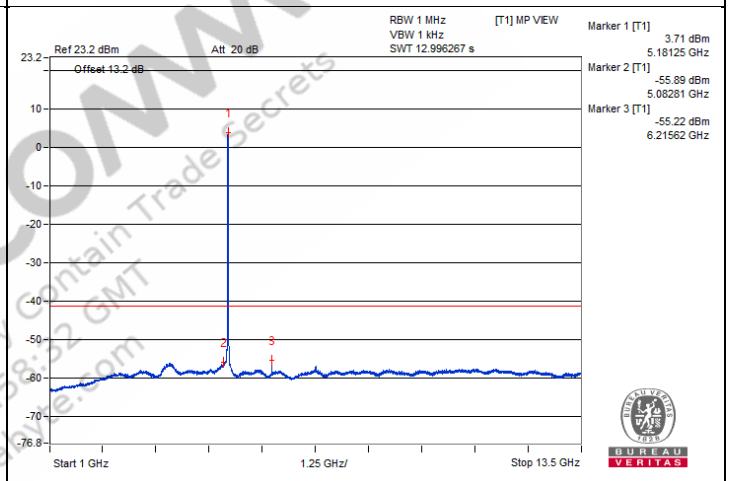

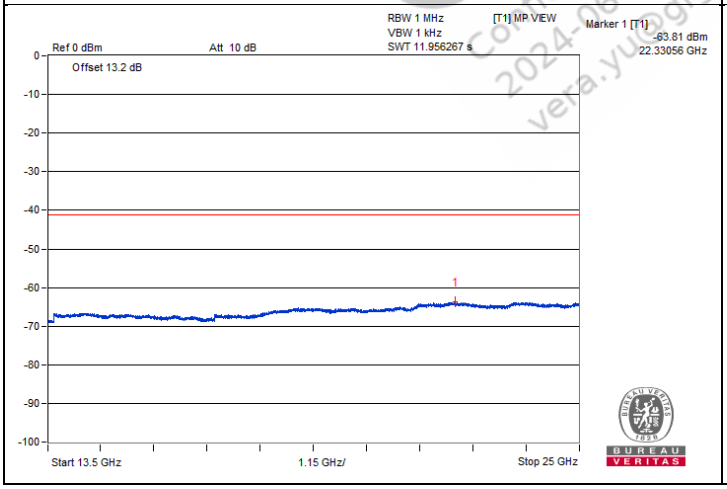

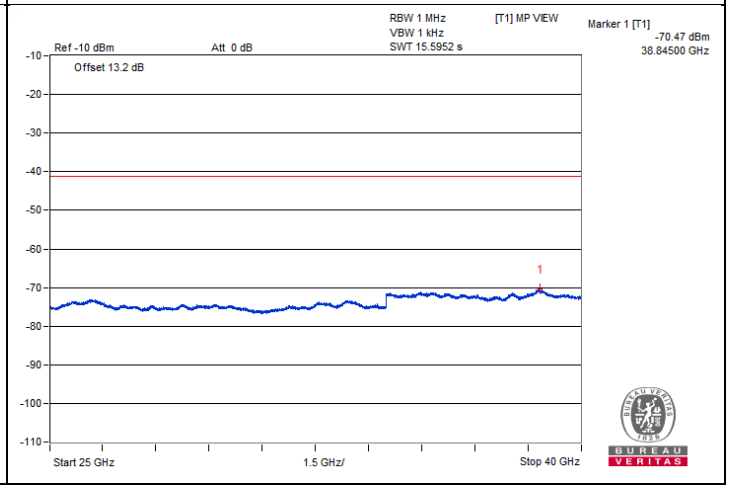

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.8	62 PK	74	-12	-44.75	-41.21	6.36	-33.26
2	5149.97	49.61 AV	54	-4.39	-55.61	-54.51	6.36	-45.65

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

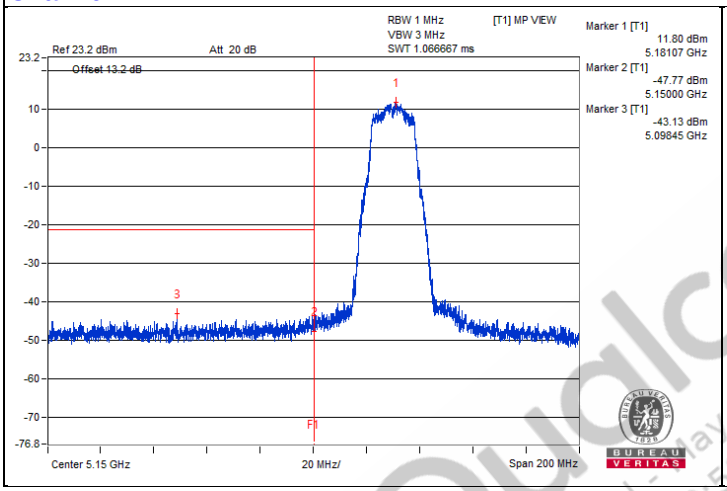

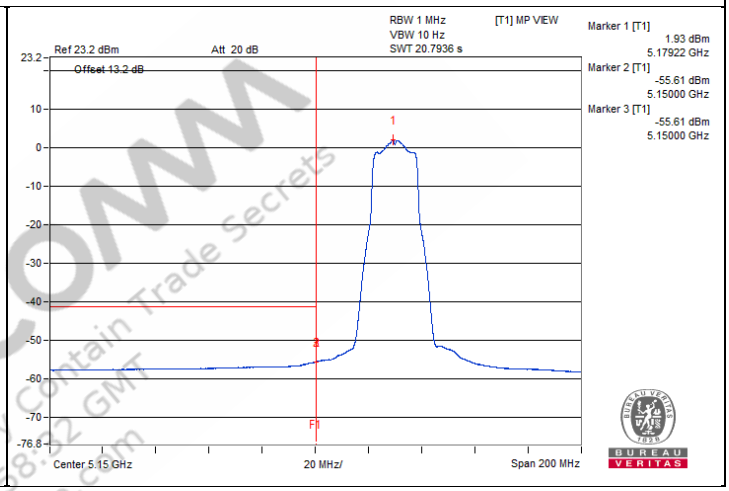

Chain 1

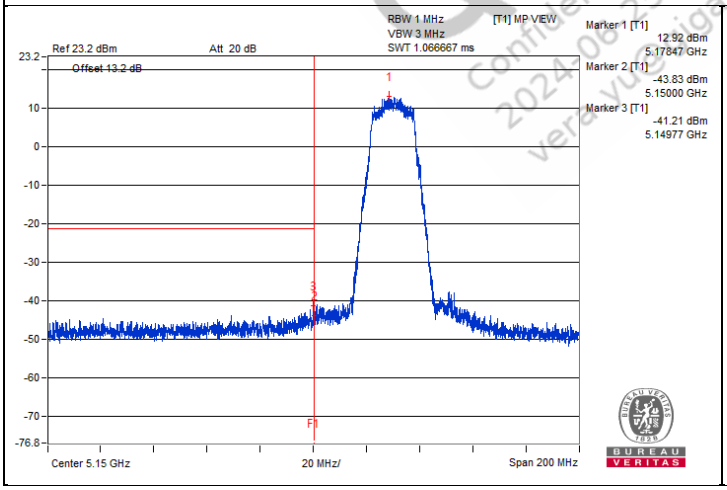

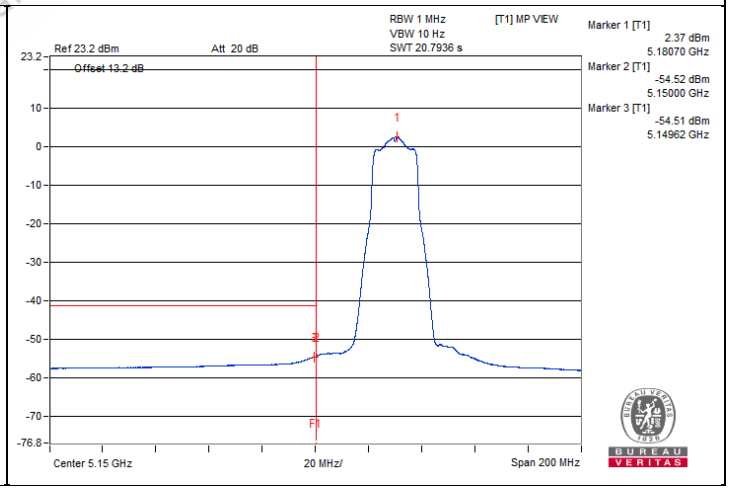

QualcOMM Confidential - May Contain Trade Secrets 2024-06-25 00:58:52 GMT verayue@gigabyte.com

802.11a - Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3453.12	57.91 PK	68.2	-10.29	-48.07	-49.05	8.17	-37.35
2	#6943.75	58.3 PK	68.2	-9.9	-47.57	-48.8	8.17	-36.96
3	#10412.5	58.93 PK	68.2	-9.27	-47.73	-47.31	8.17	-36.33
4	15590.12	48.9 PK	74	-25.1	-56.14	-59.61	8.17	-46.36
5	15603.06	39.25 AV	54	-14.75	-67.14	-67.25	8.17	-56.01


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

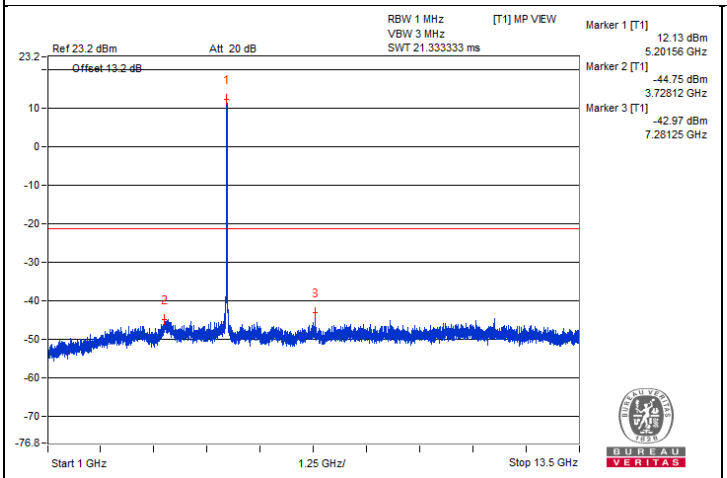


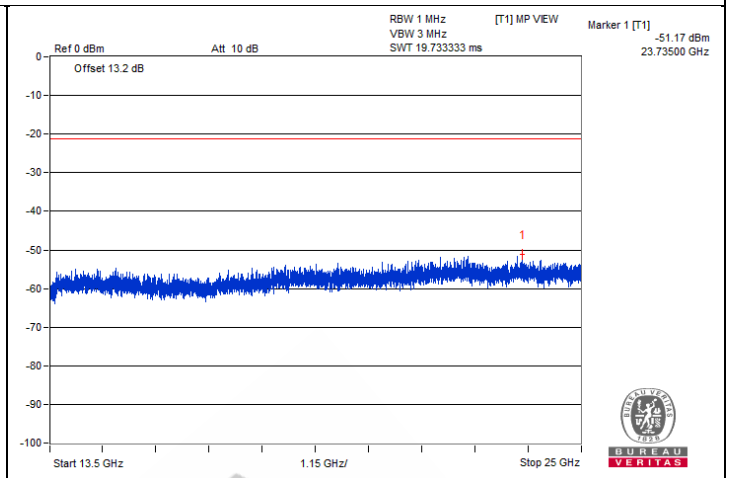

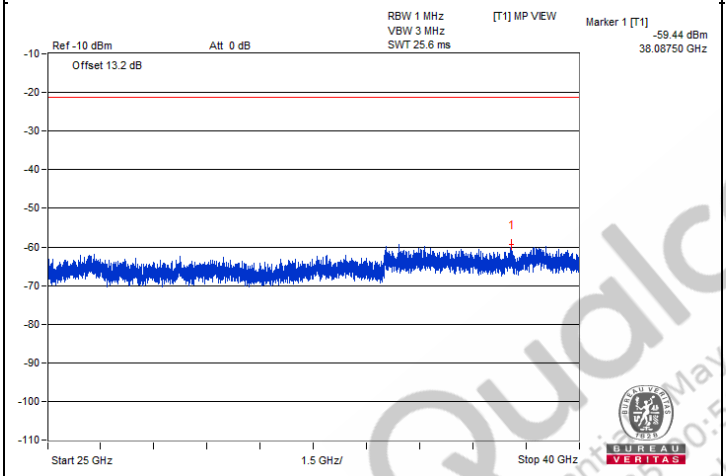

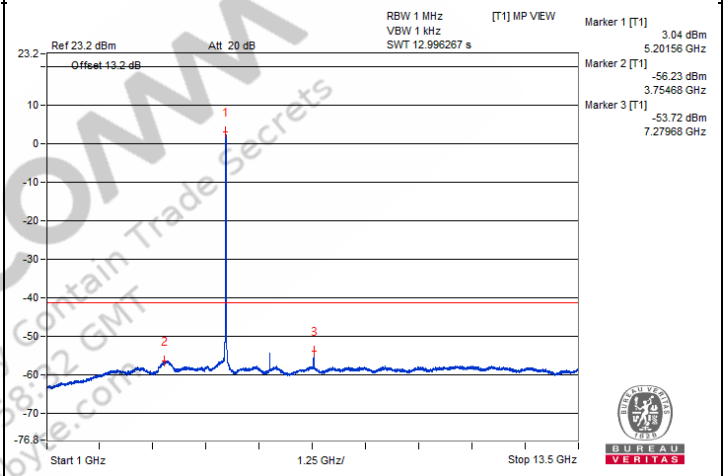


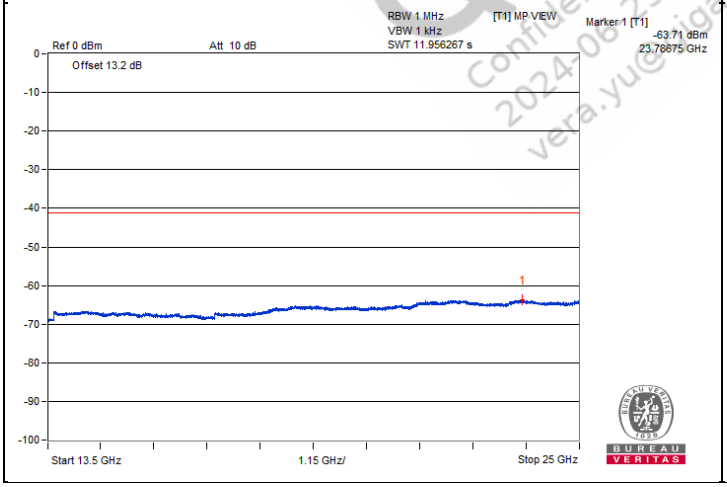


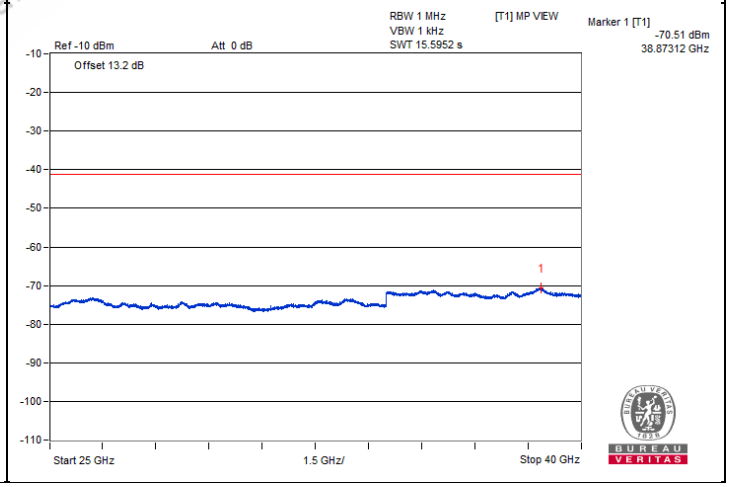



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

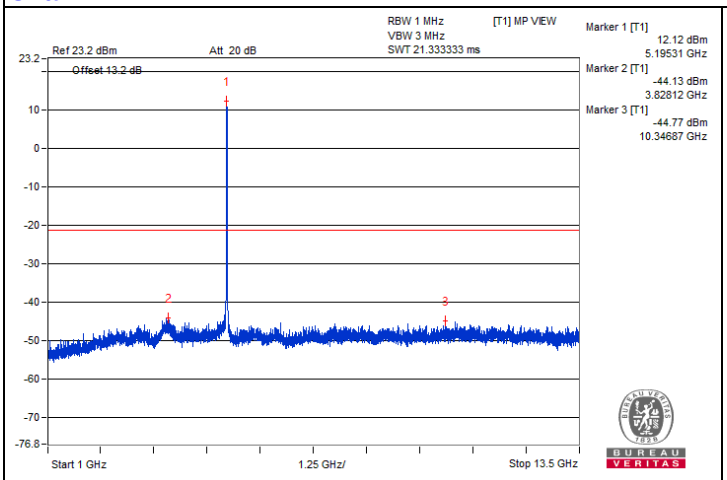


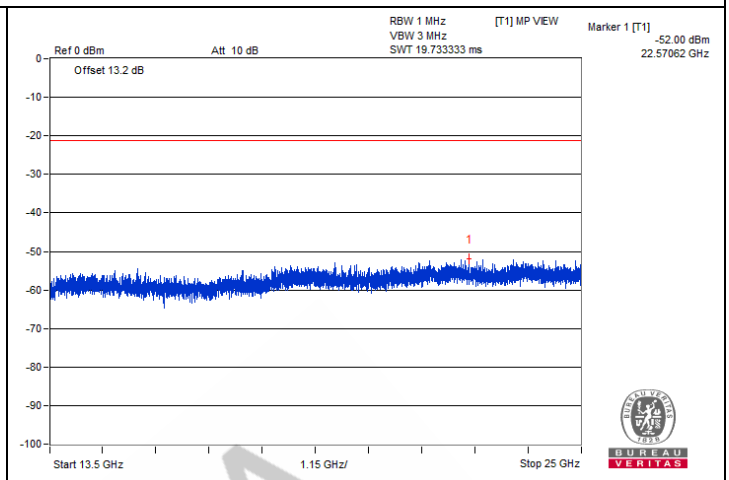

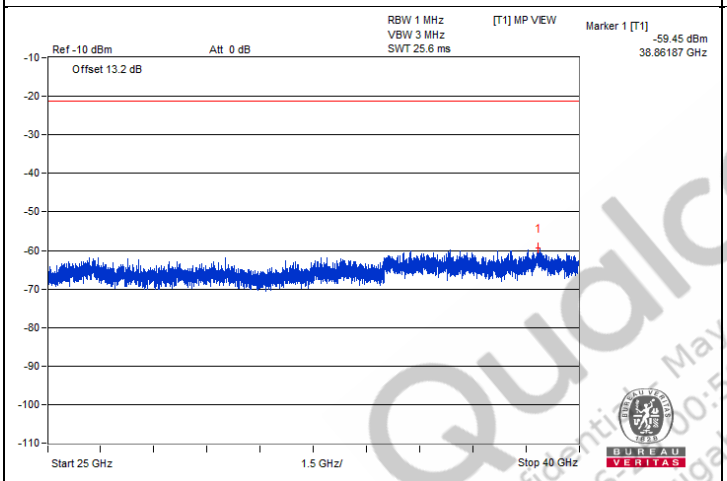

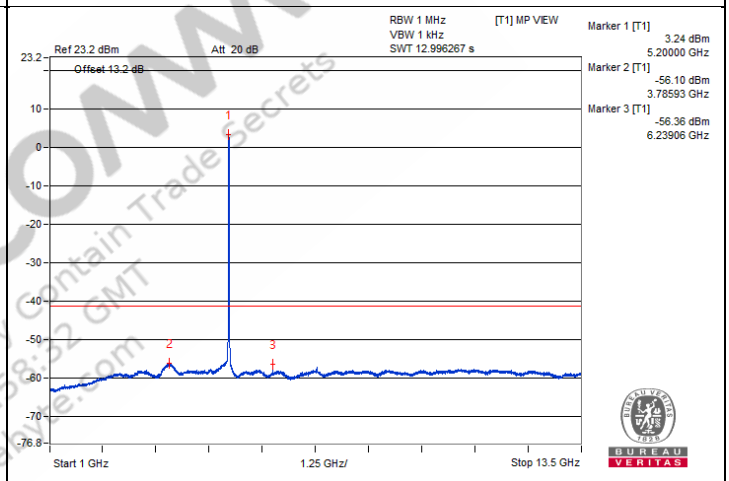

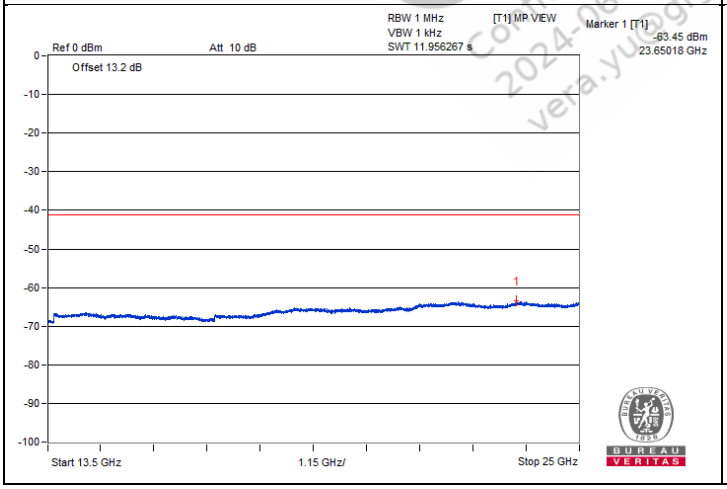

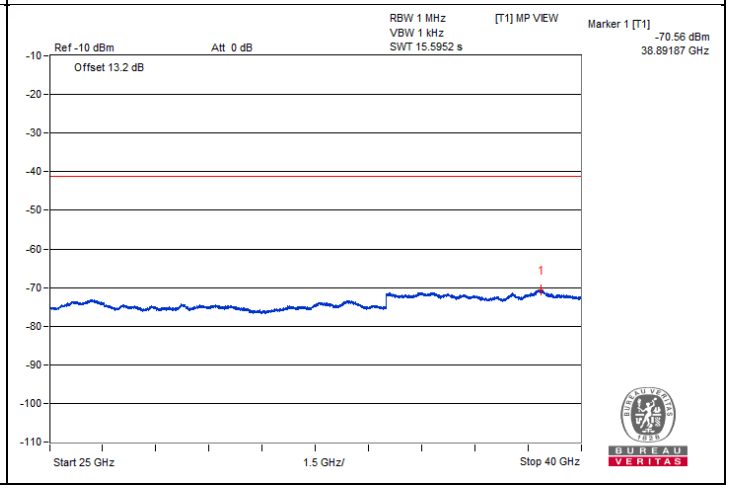

QualcOMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qgatvre.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5105.12	59.26 PK	74	-14.74	-46.66	-44.38	6.36	-36.00
2	5149.67	47.85 AV	54	-6.15	-56.98	-56.58	6.36	-47.41

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

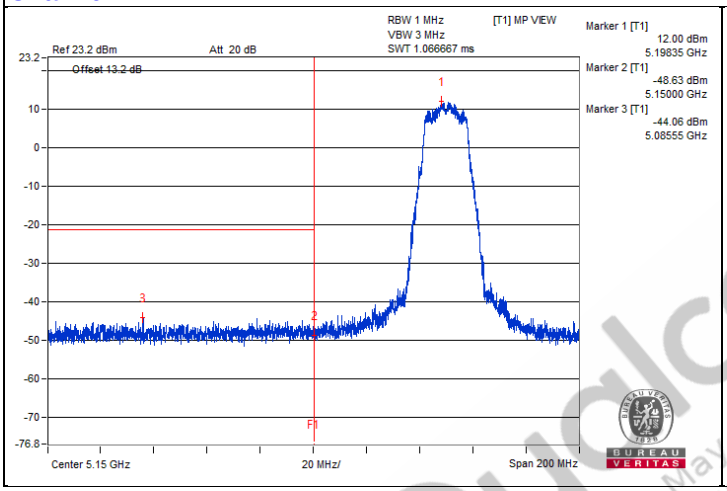

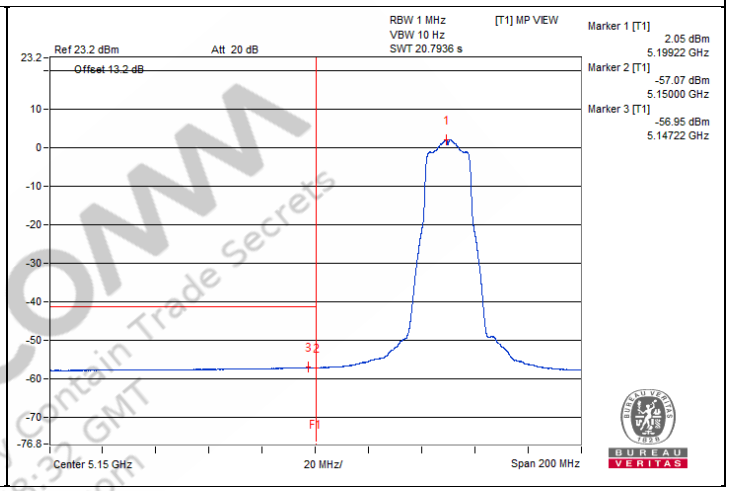

Chain 1

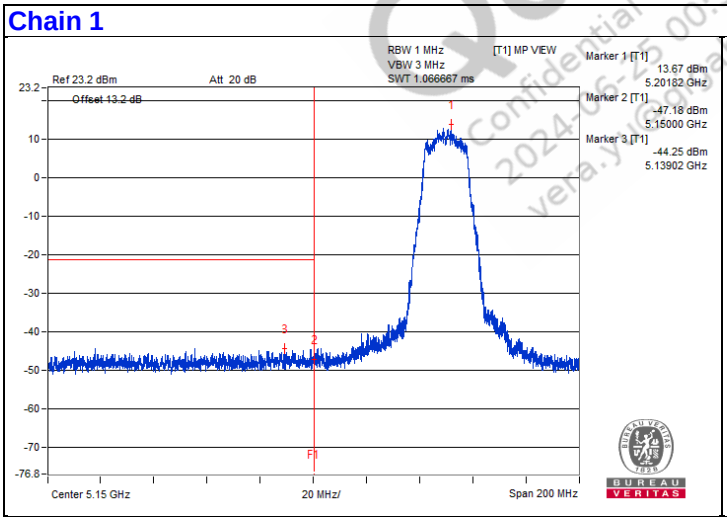

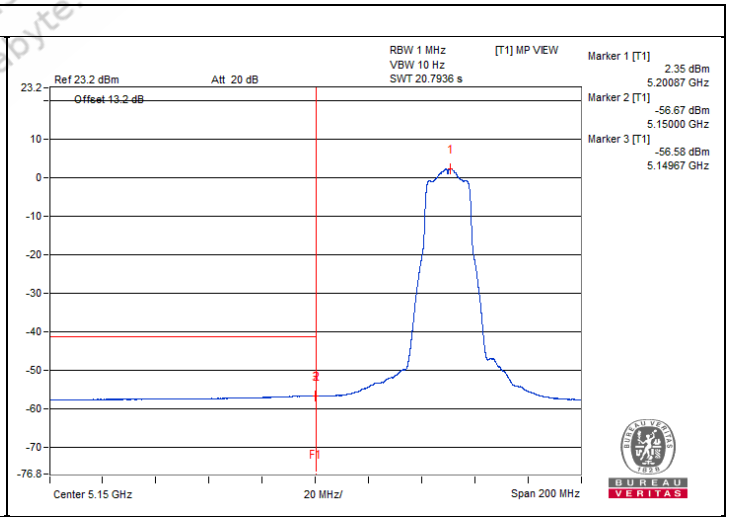

Qualcomm Confidential - May contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.y@compliancepyte.com

802.11a - Channel 48

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3479.68	57.65 PK	68.2	-10.55	-49.17	-48.45	8.17	-37.61
2	#6989.06	59 PK	68.2	-9.2	-48.88	-46.36	8.17	-36.26
3	#10468.75	59.5 PK	68.2	-8.7	-46.9	-46.99	8.17	-35.76
4	15703.68	48.48 PK	74	-25.52	-58.46	-57.51	8.17	-46.78
5	15736.75	39.08 AV	54	-14.92	-67.29	-67.44	8.17	-56.18


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

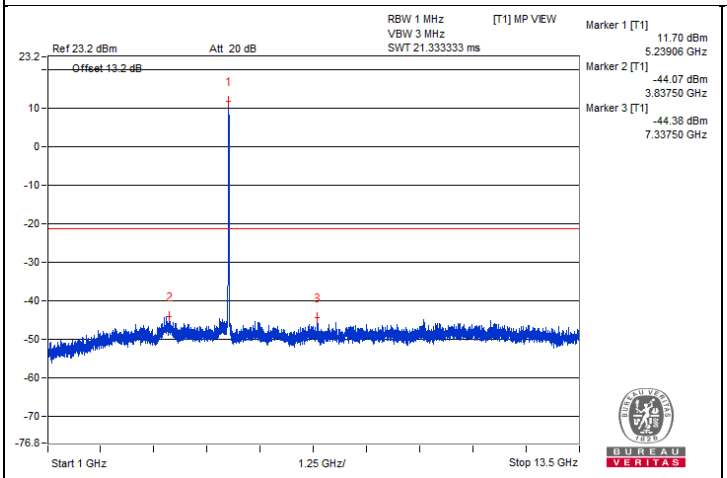


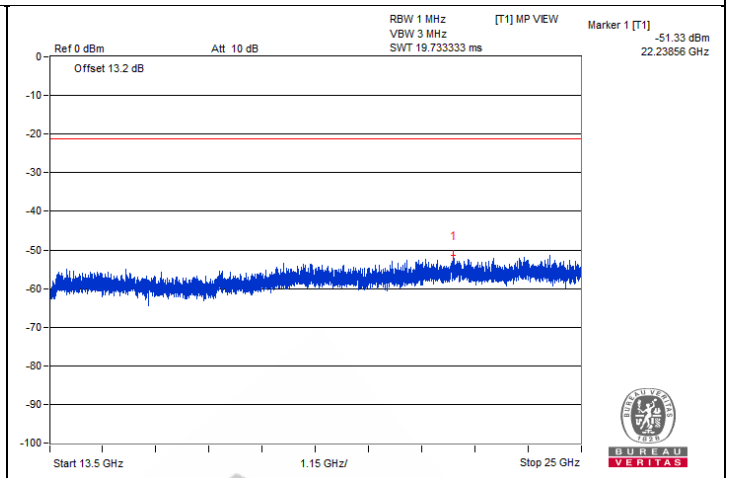

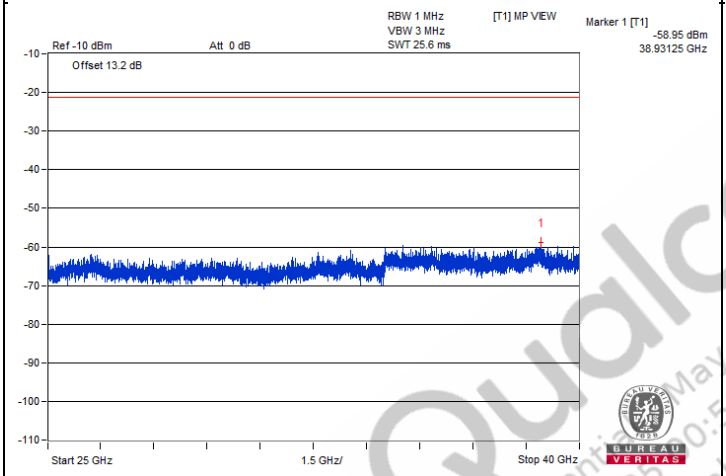

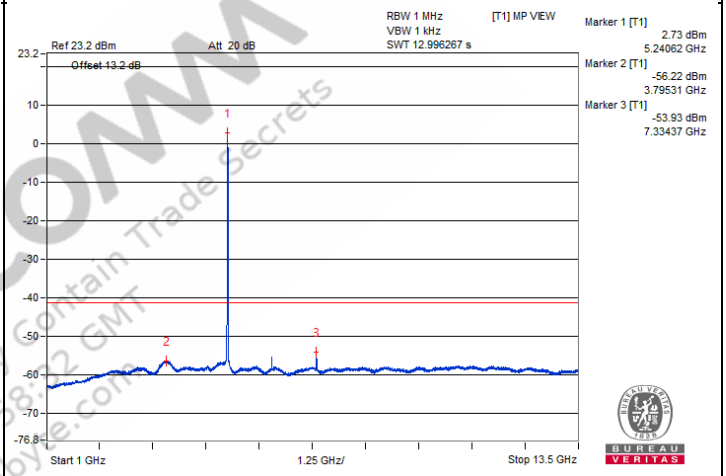


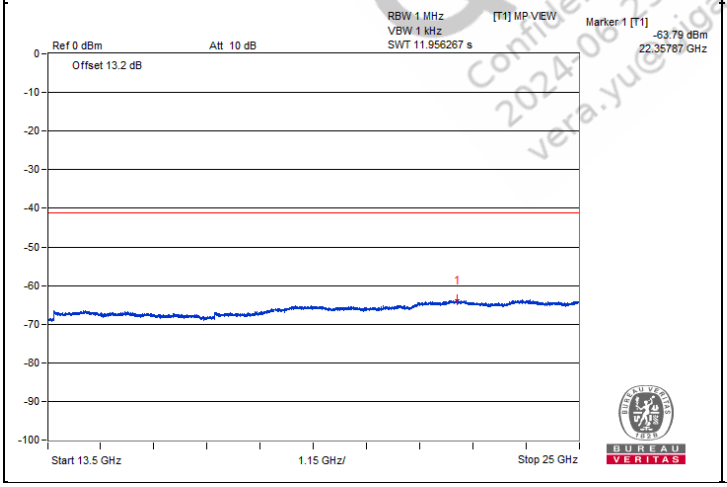


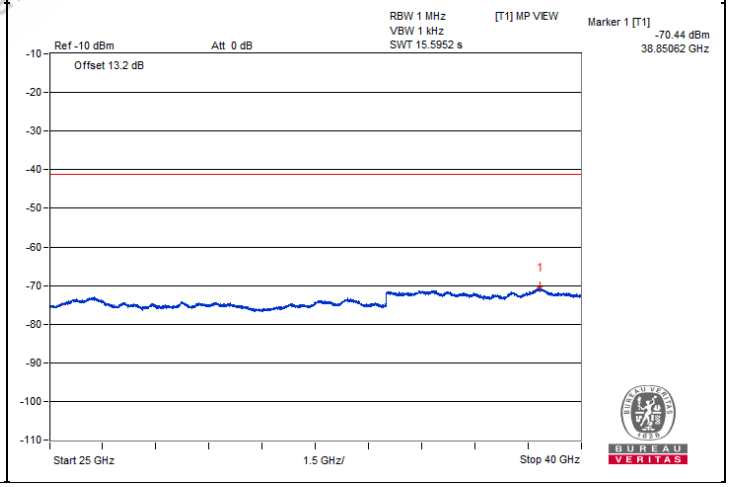



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:02 GMT
vera.yue@gigabyte.com


Chain 1

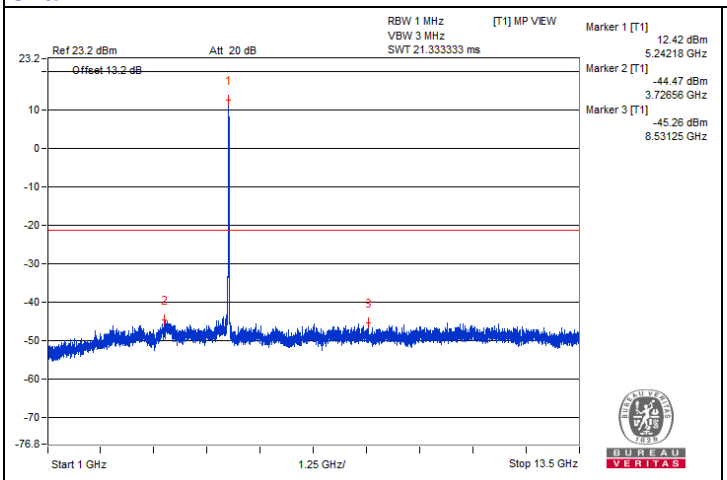


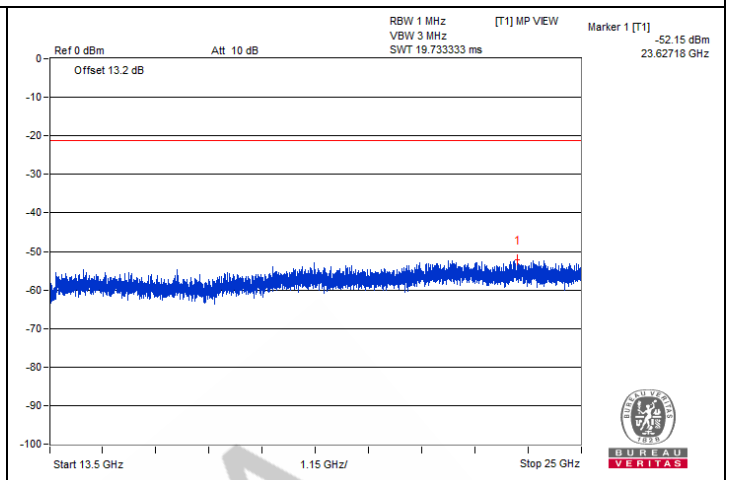

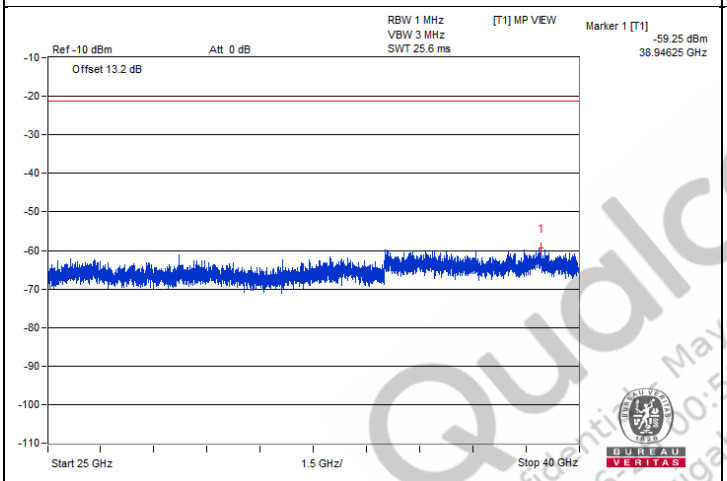

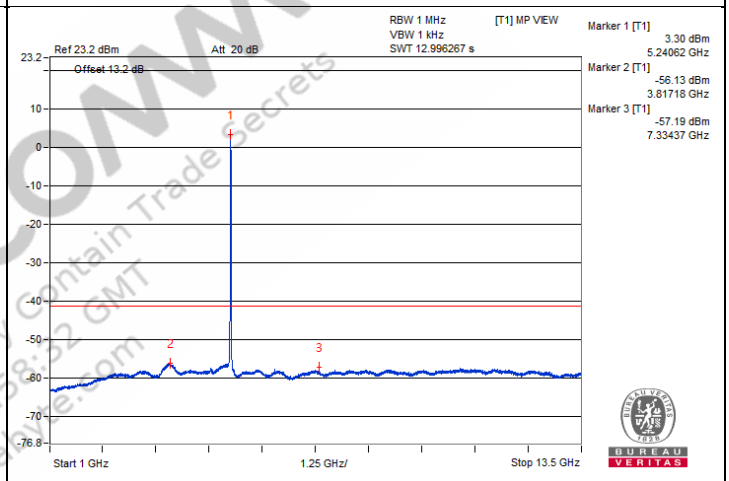

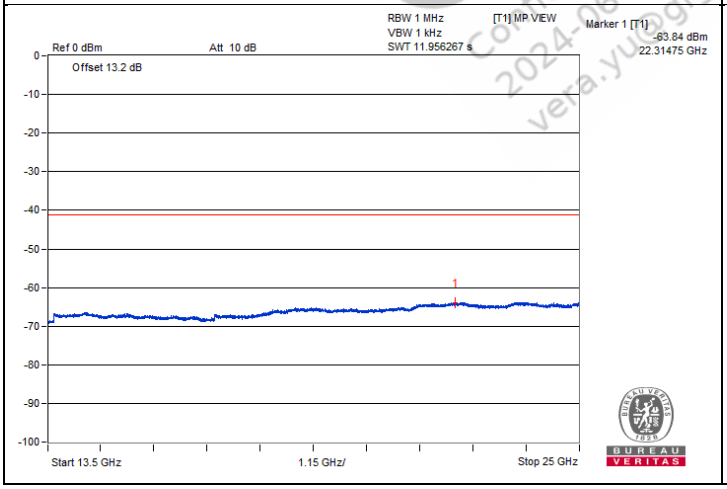

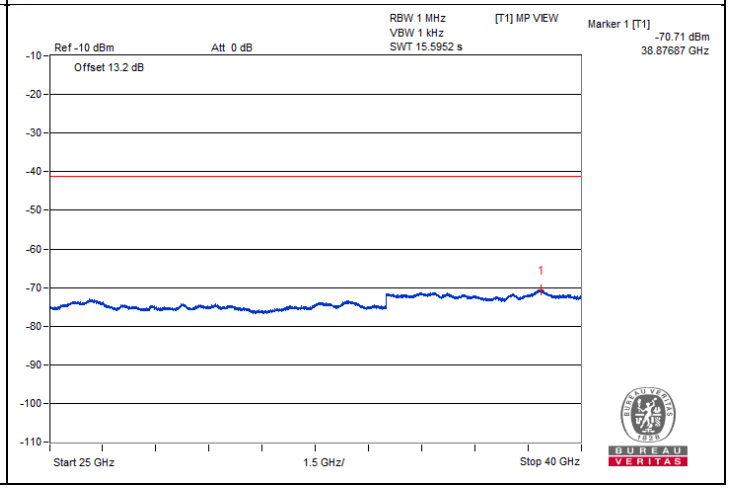

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5065.2	58.88 PK	74	-15.12	-44.31	-47.91	6.36	-36.38
2	5085.97	46.93 AV	54	-7.07	-57.74	-57.67	6.36	-48.33

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

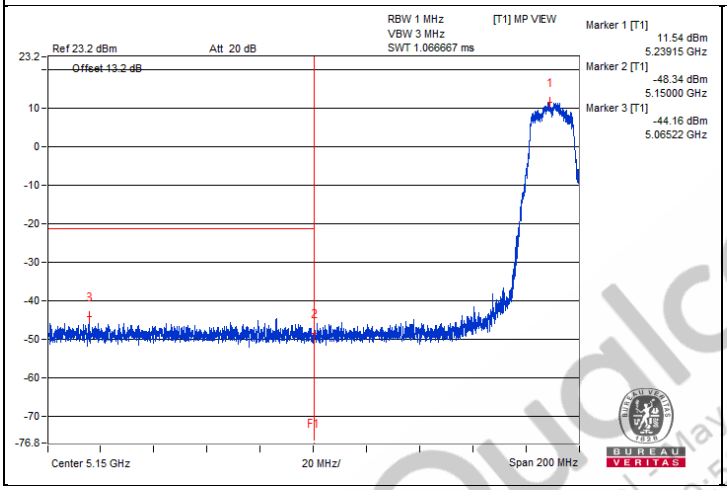

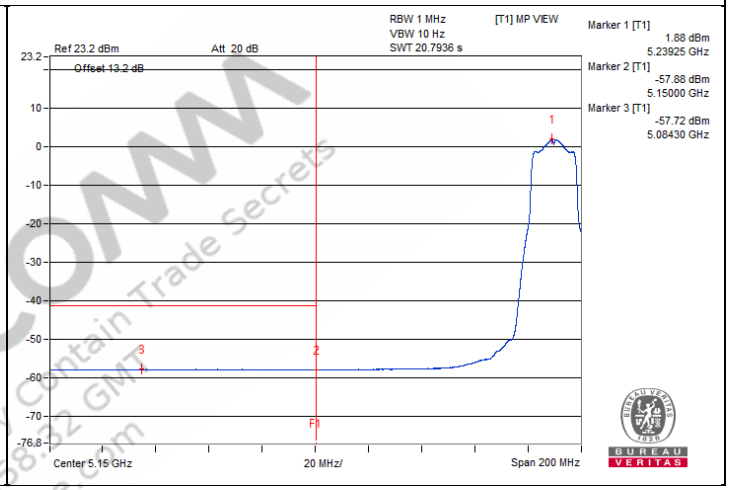

Chain 1

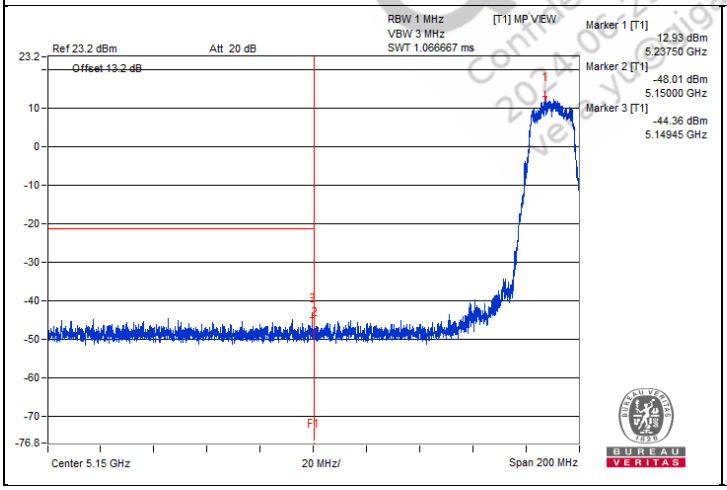

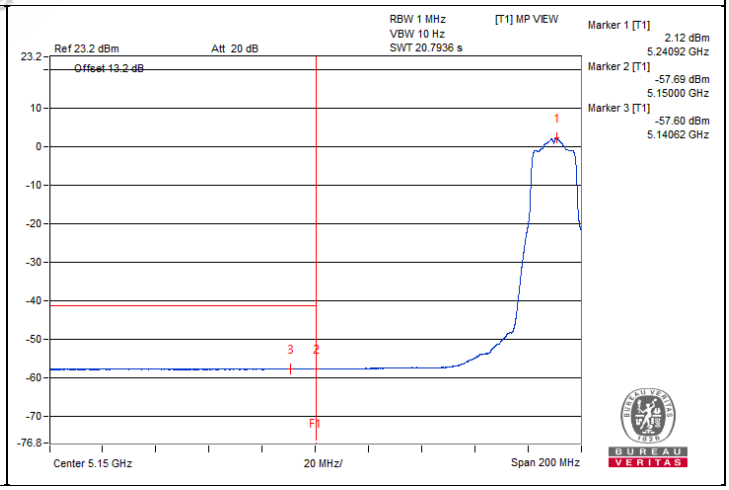

Qualcomm Confidential and Contain Trade Secrets
2024-06-25 00:58:32 GMT+
Vera Yu@gigabyte.com

802.11a - Channel 52

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3506.25	57.62 PK	74	-16.38	-47.7	-50.32	8.17	-37.64
2	3503.12	47.26 AV	54	-6.74	-59.05	-59.32	8.17	-48.00
3	#7018.75	58.41 PK	68.2	-9.79	-47.83	-48.23	8.17	-36.85
4	#10500	59.34 PK	68.2	-8.86	-46.01	-48.56	8.17	-35.92
5	15769.81	48.43 PK	74	-25.57	-58.24	-57.8	8.17	-46.83
6	15782.75	38.88 AV	54	-15.12	-67.31	-67.83	8.17	-56.38


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

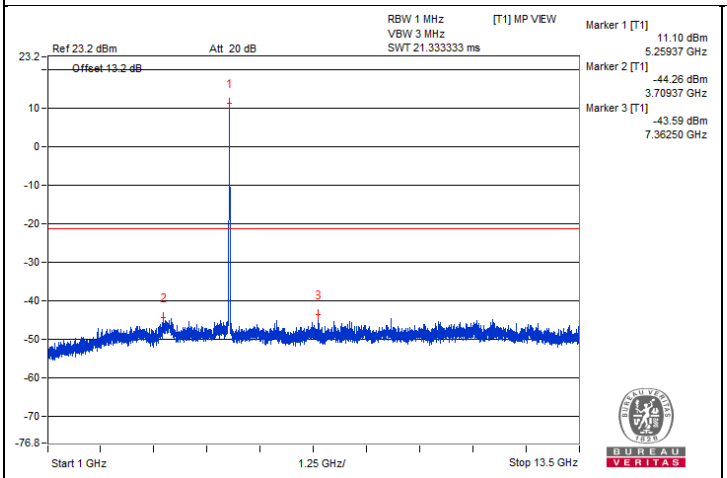


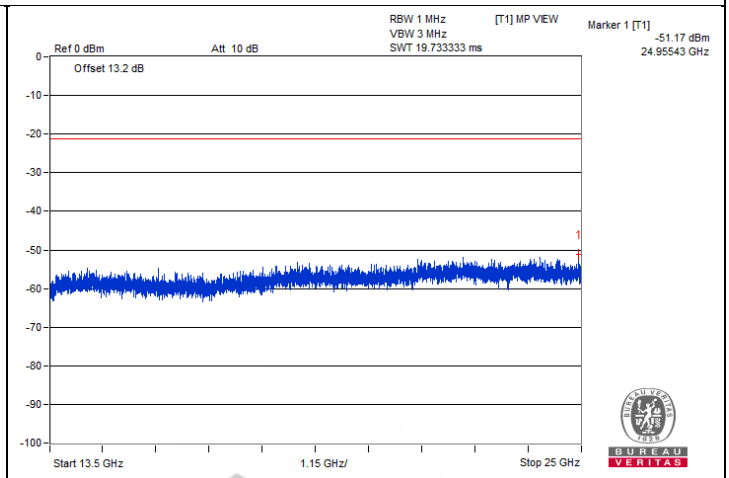

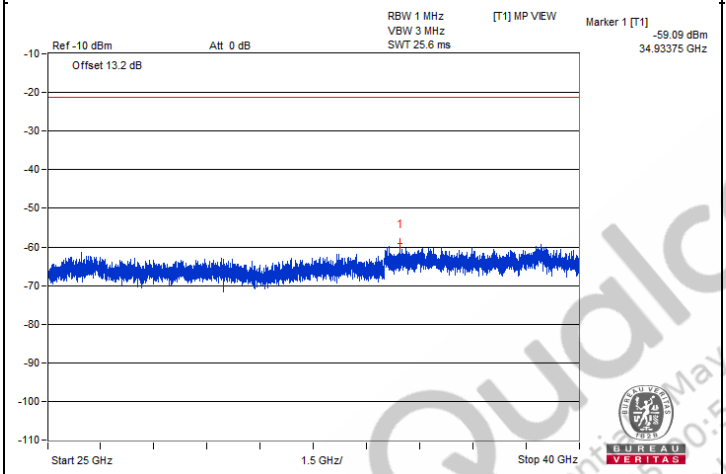

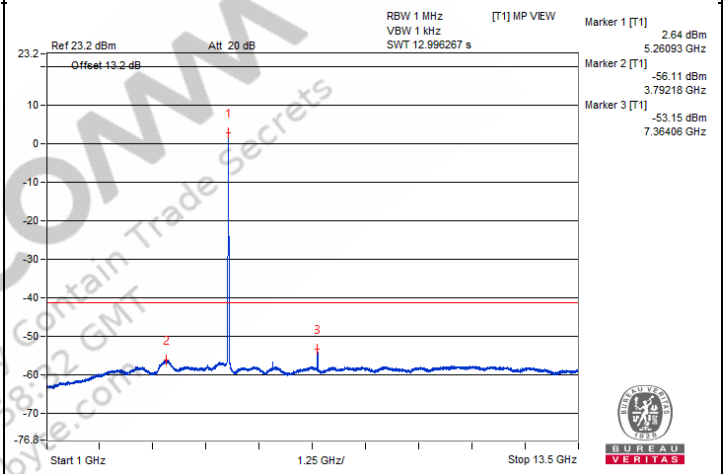


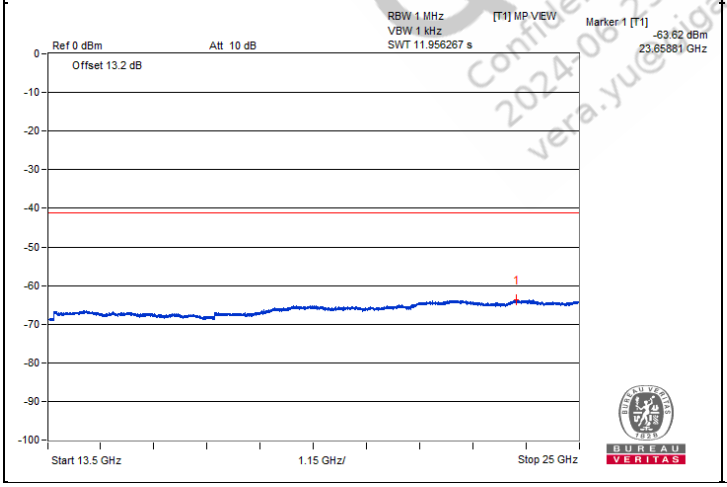


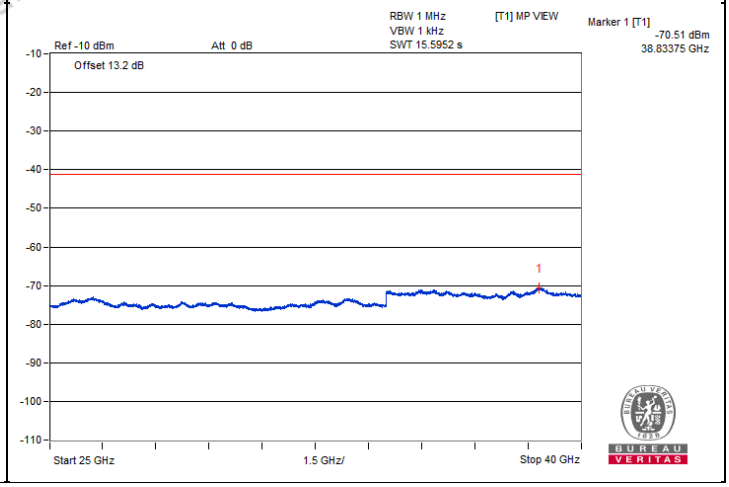



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

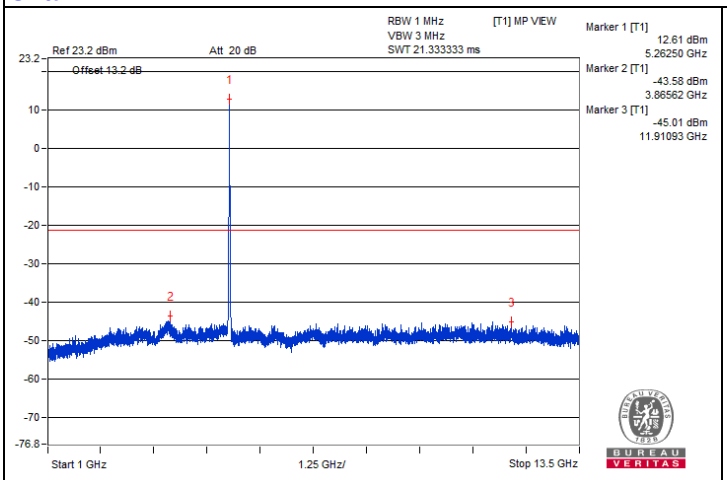


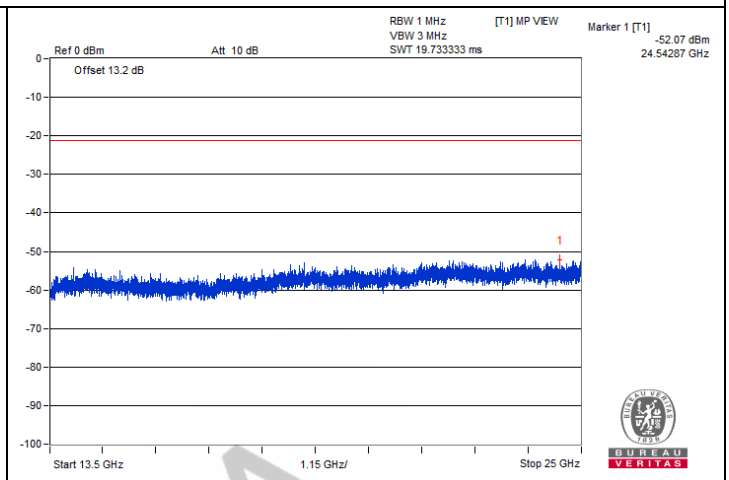

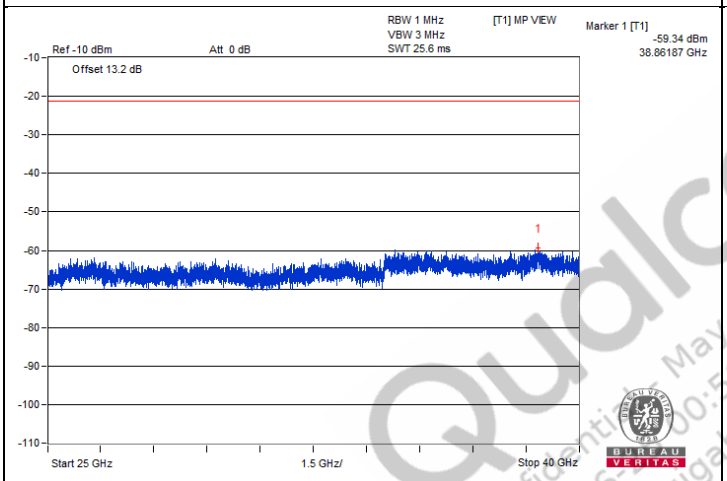

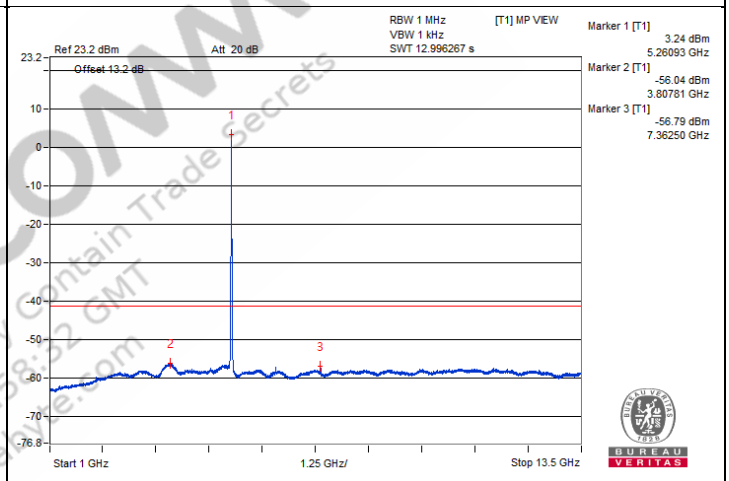

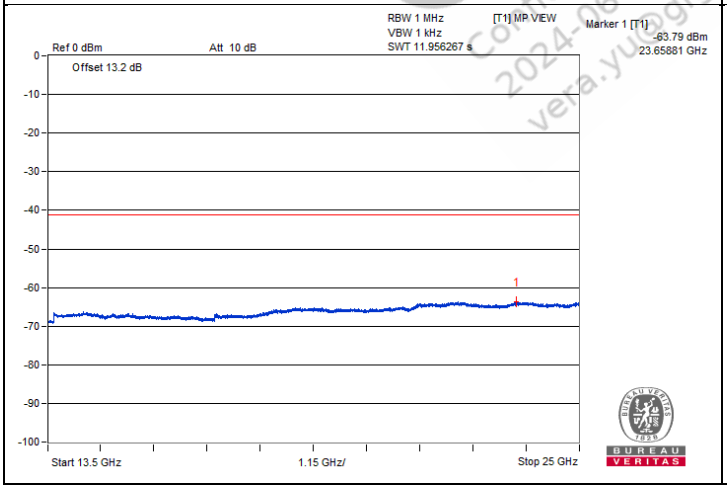

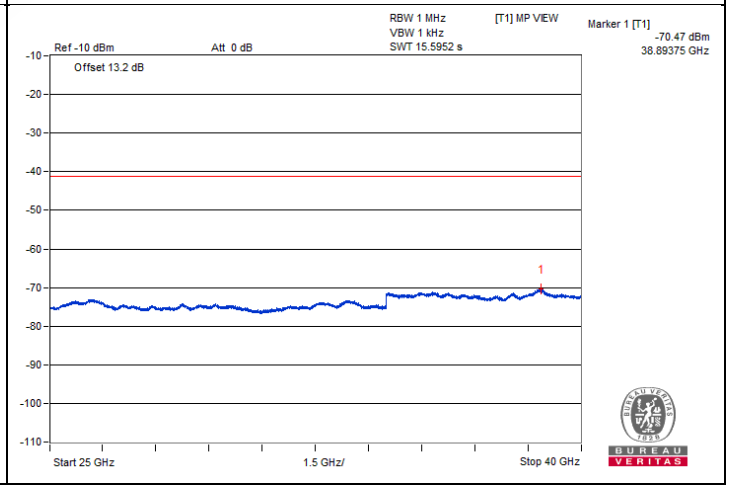

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5374.85	56.66 PK	74	-17.34	-46.52	-50.41	6.43	-38.60
2	5350.82	45.43 AV	54	-8.57	-59.19	-59.35	6.43	-49.83

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

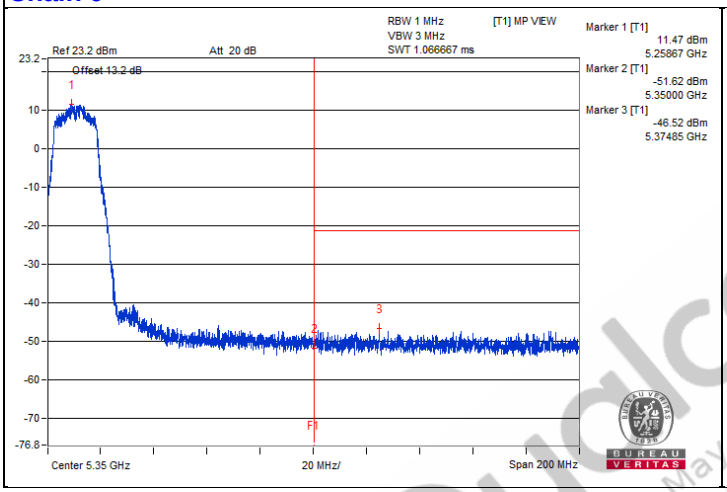

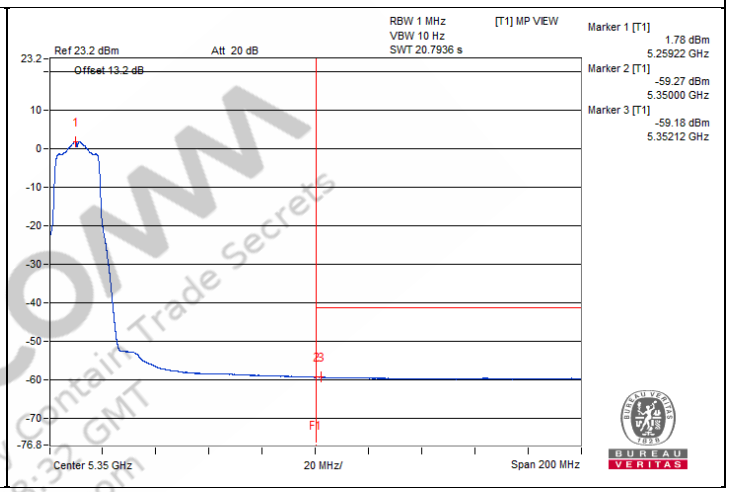

Chain 1

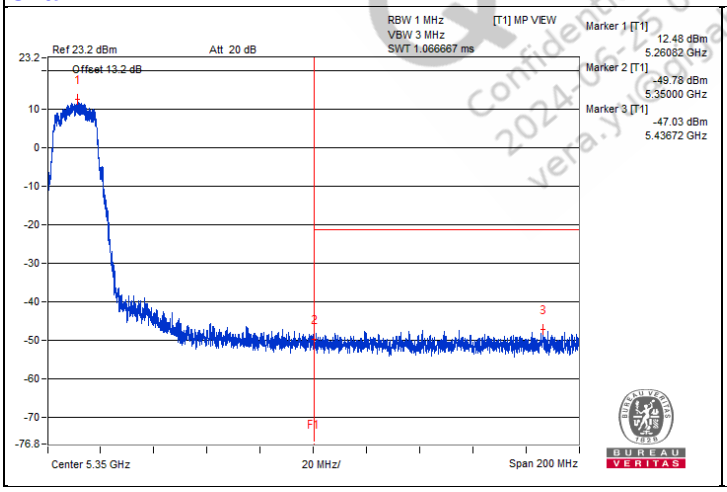

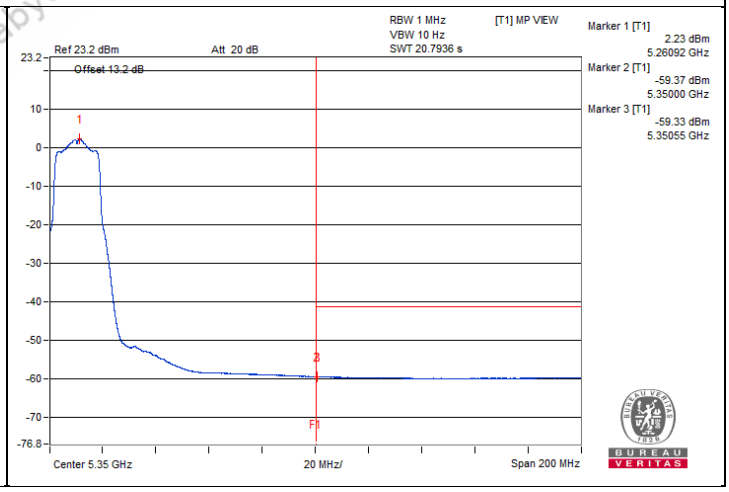

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@cnbyte.com

802.11a - Channel 60

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3539.06	57.92 PK	74	-16.08	-47.63	-49.64	8.17	-37.34
2	3518.75	47.24 AV	54	-6.76	-59.53	-58.89	8.17	-48.02
3	#7054.68	59.26 PK	68.2	-8.94	-47.12	-47.25	8.17	-36.00
4	#10584.37	59.84 PK	68.2	-8.36	-46.37	-46.85	8.17	-35.42
5	15892	48.75 PK	74	-25.25	-57.17	-58.29	8.17	-46.51
6	15883.37	38.76 AV	54	-15.24	-67.65	-67.71	8.17	-56.50


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

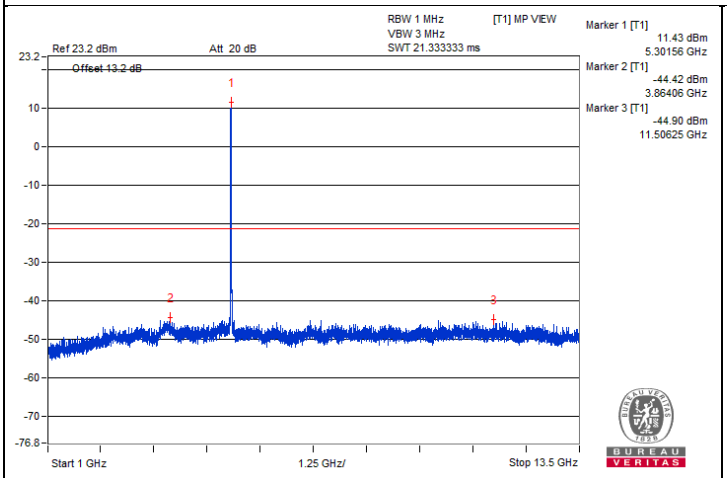


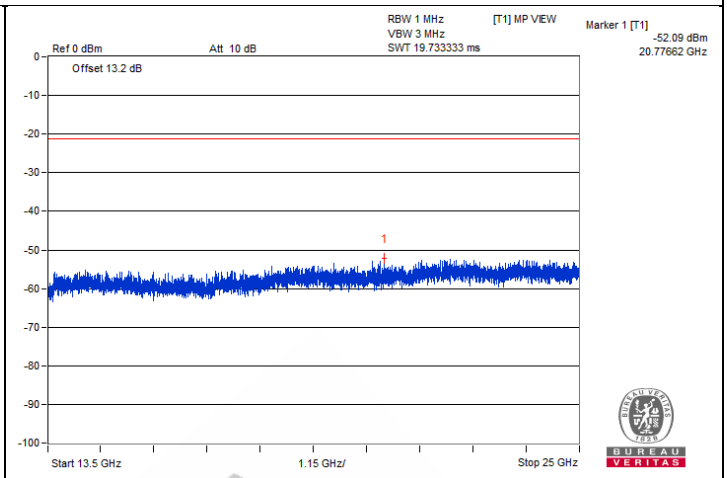

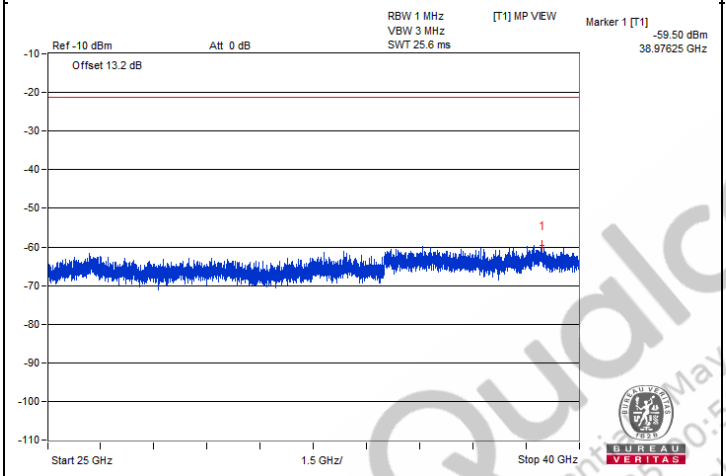

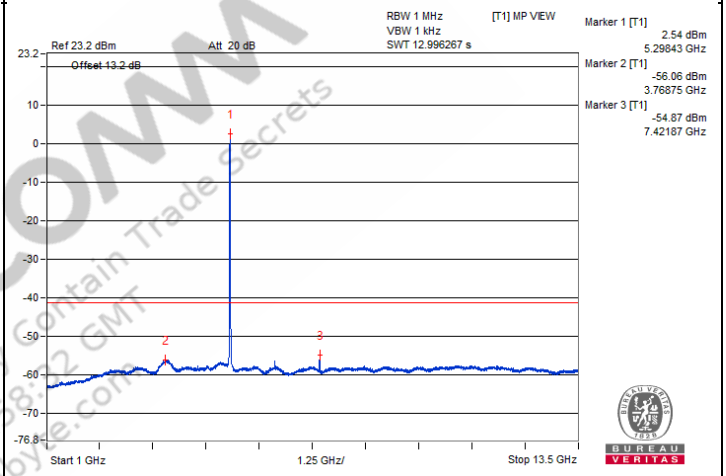


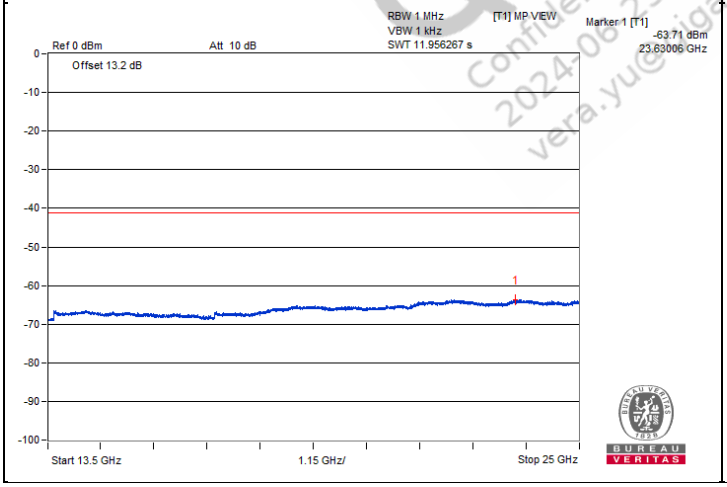


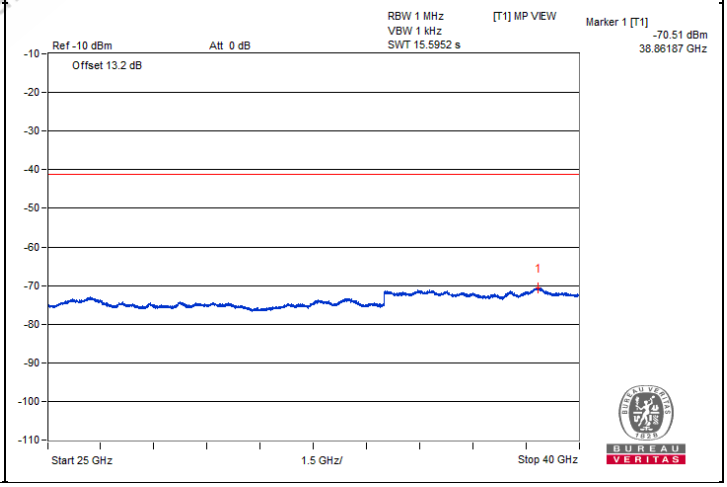



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yu@gigabyte.com


Chain 1

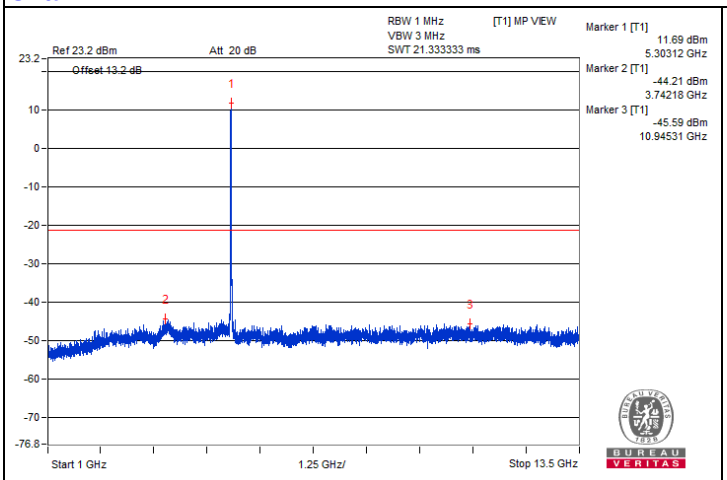


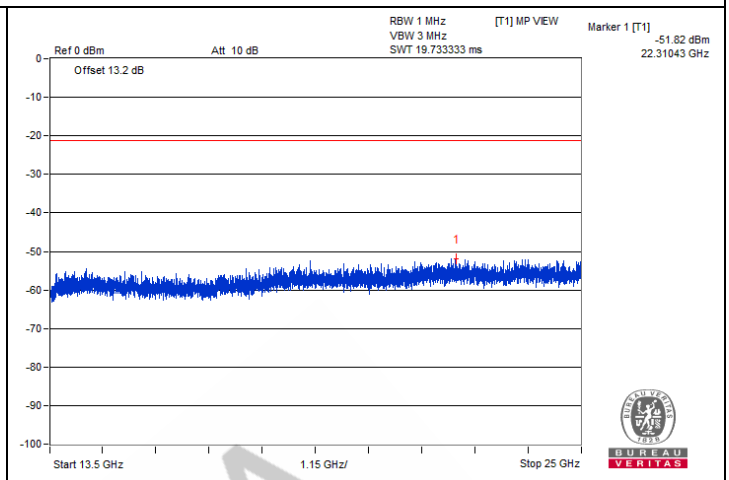

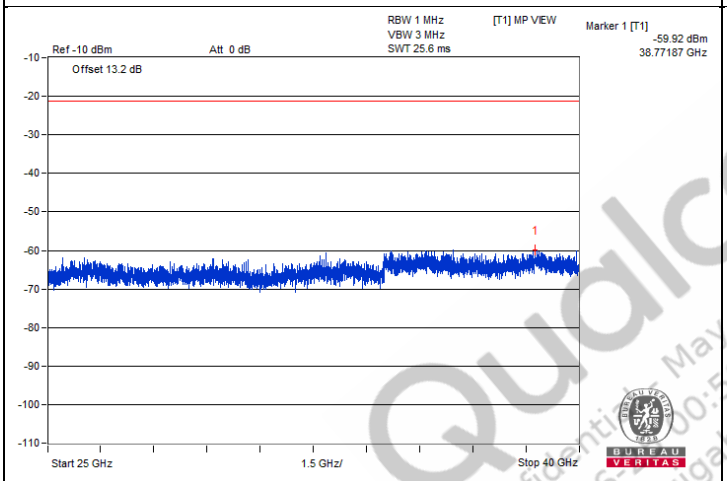

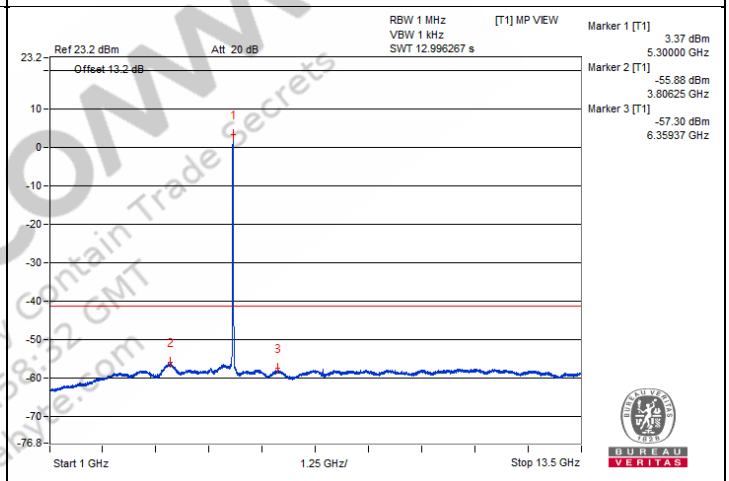

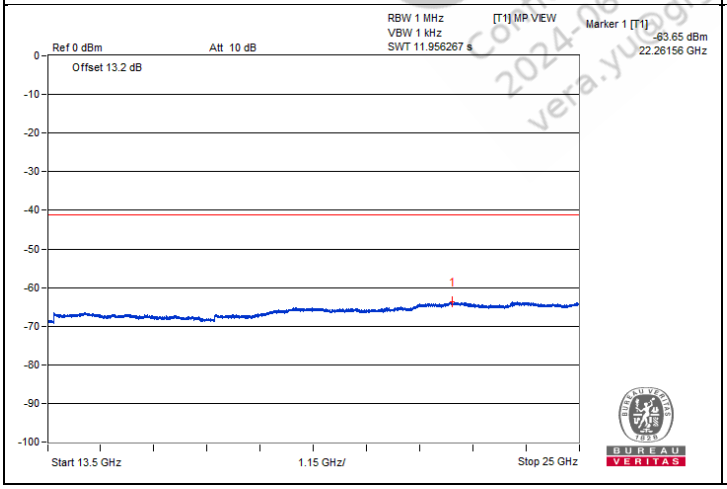

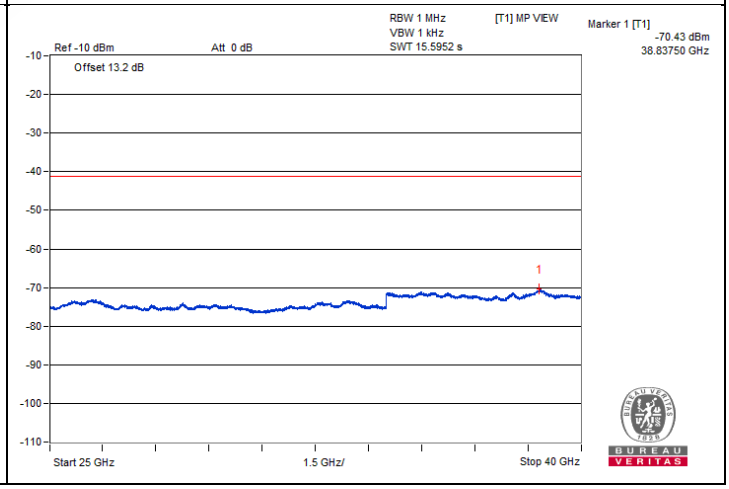

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5369.35	58.11 PK	74	-15.89	-46.98	-46.24	6.43	-37.15
2	5350	46.95 AV	54	-7.05	-57.79	-57.71	6.43	-48.31

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

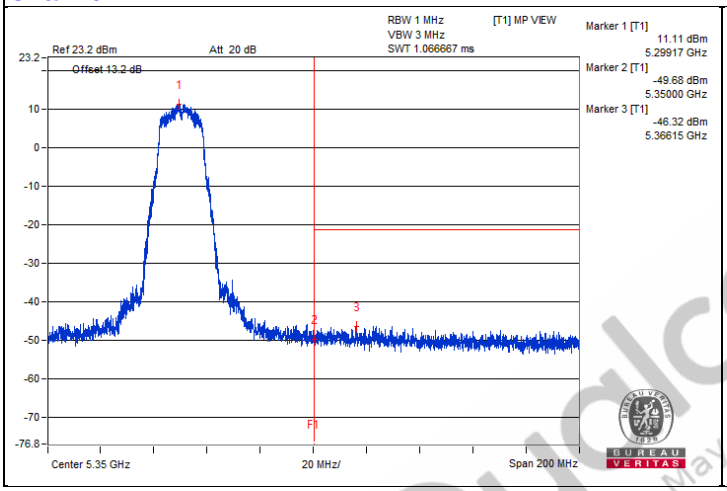

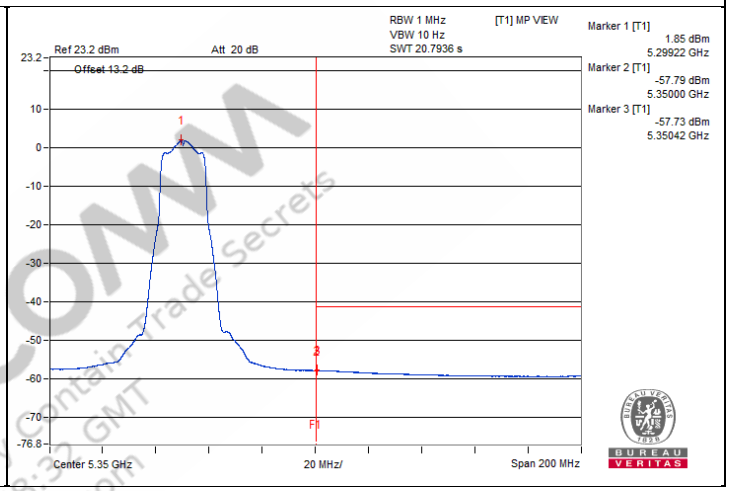

Chain 1

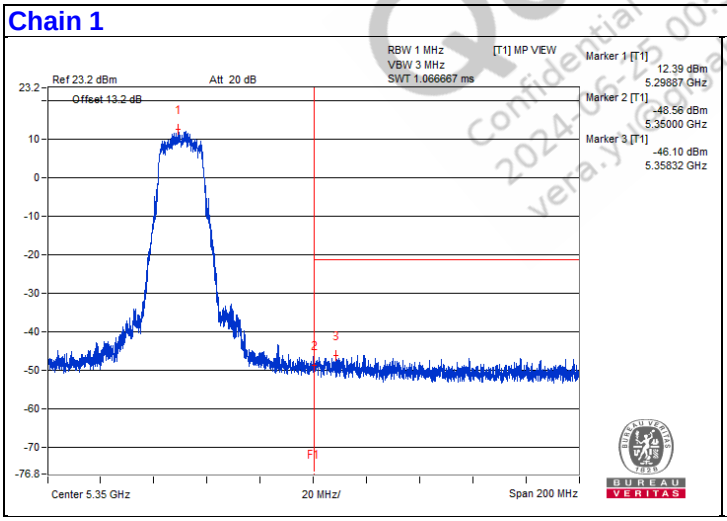

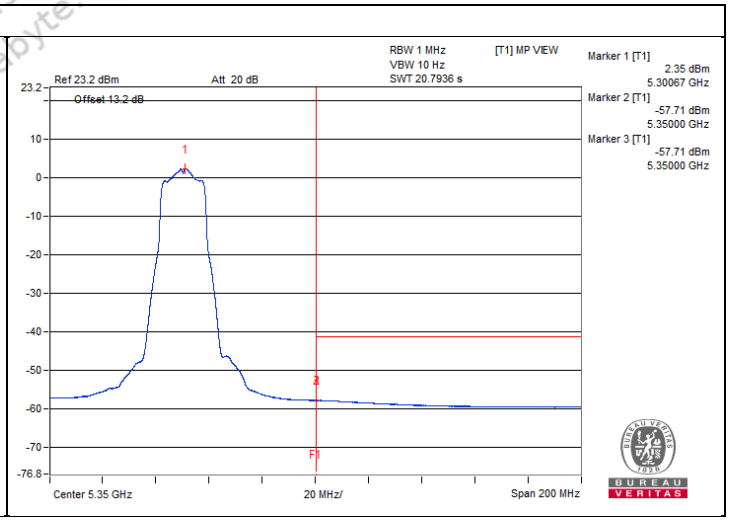

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@cyberbyte.com

802.11a - Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3550	57.81 PK	74	-16.19	-48.61	-48.66	8.17	-37.45
2	3564.06	47.31 AV	54	-6.69	-58.99	-59.28	8.17	-47.95
3	#7087.5	59.02 PK	68.2	-9.18	-46.86	-48.06	8.17	-36.24
4	10657.81	59.62 PK	74	-14.38	-46.54	-47.12	8.17	-35.64
5	10621.87	48.71 AV	54	-5.29	-57.64	-57.82	8.17	-46.55
6	15963.87	49.18 PK	74	-24.82	-58.8	-56.12	8.17	-46.08
7	15965.31	38.75 AV	54	-15.25	-67.62	-67.77	8.17	-56.51


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

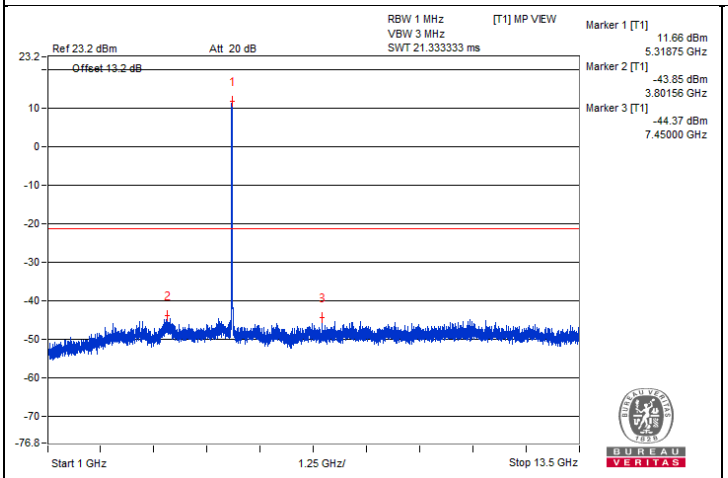


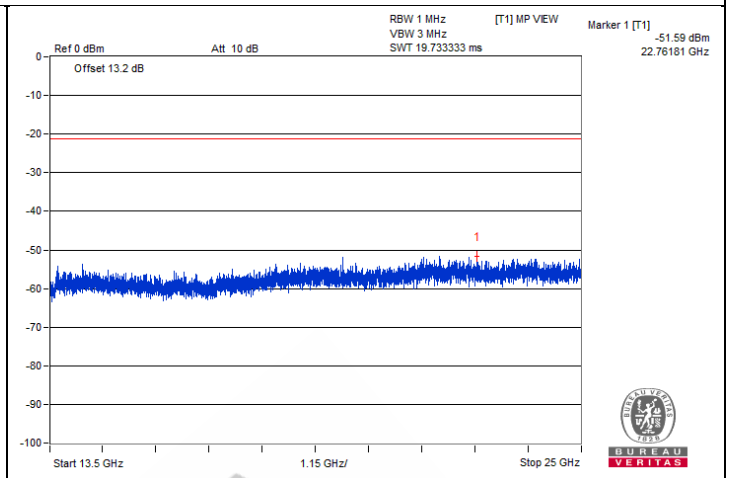

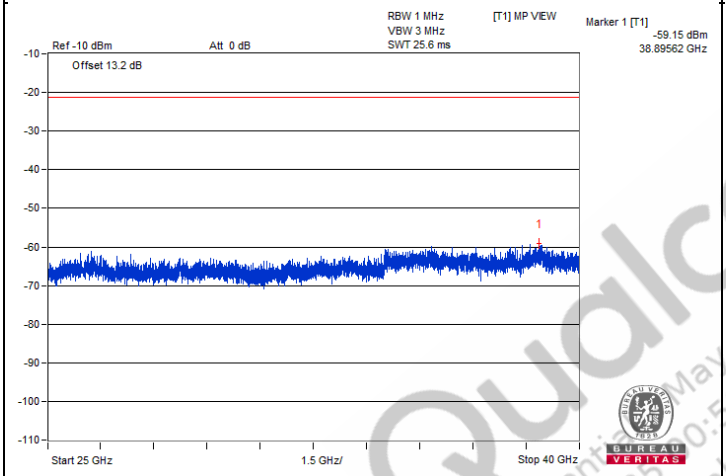

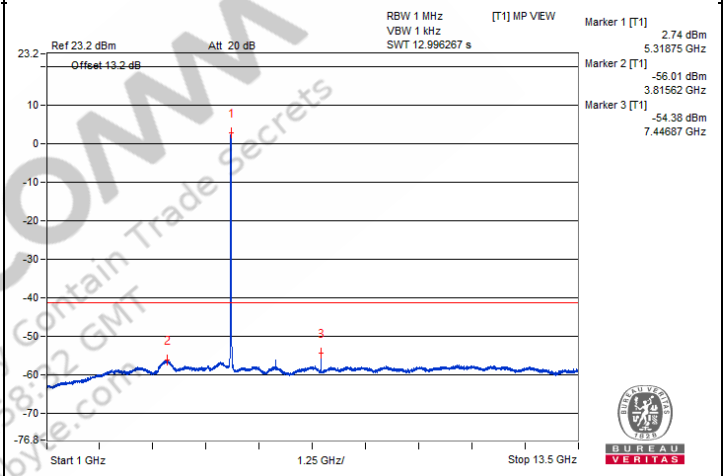


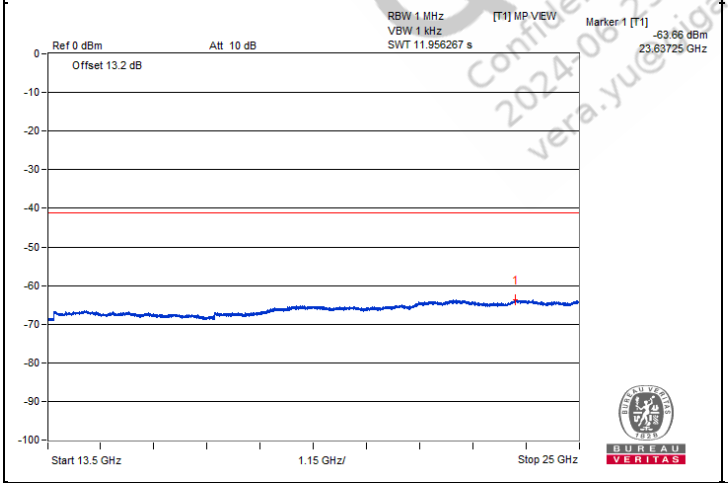


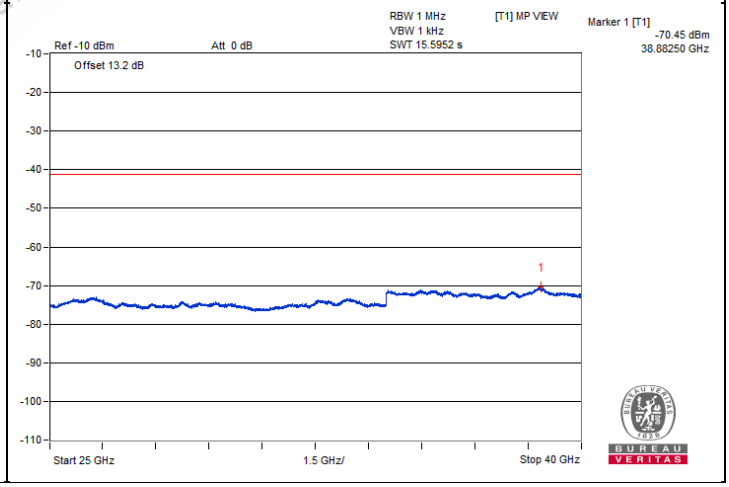



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yu@gigabyte.com


Chain 1

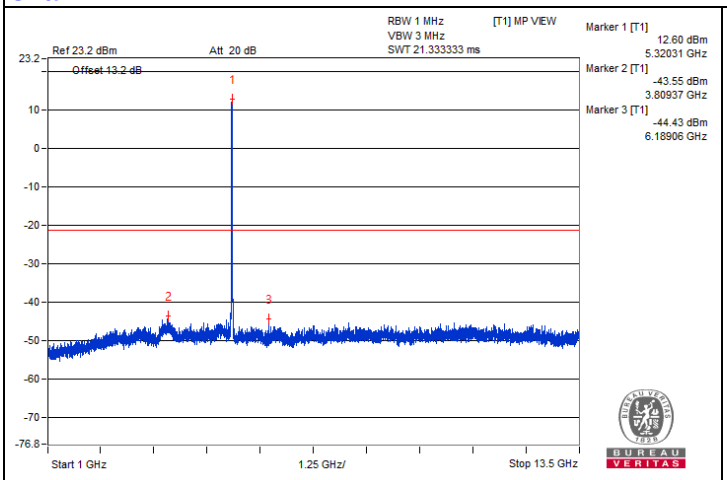


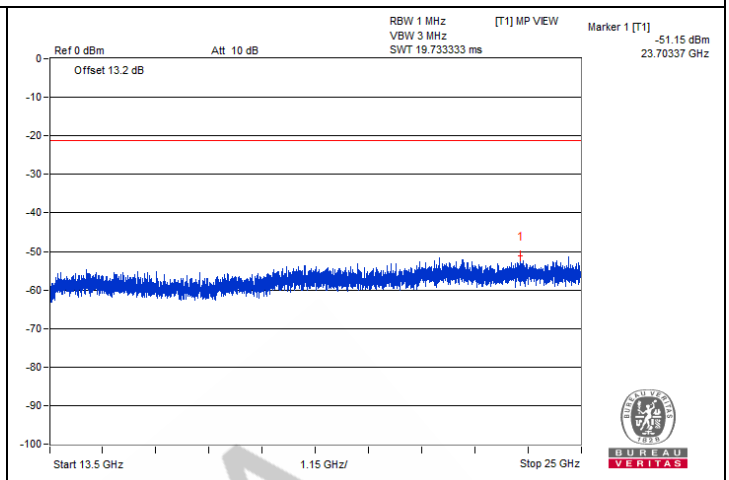

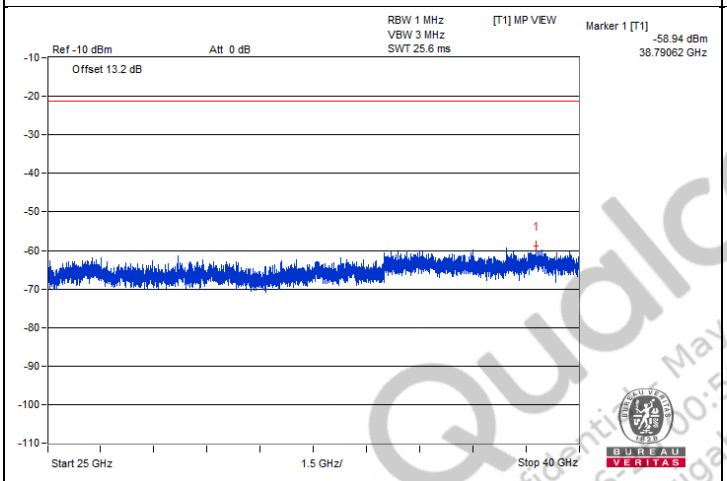

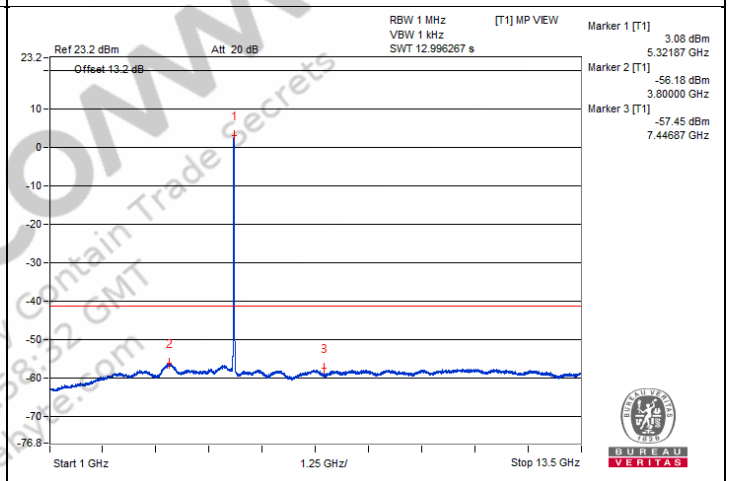

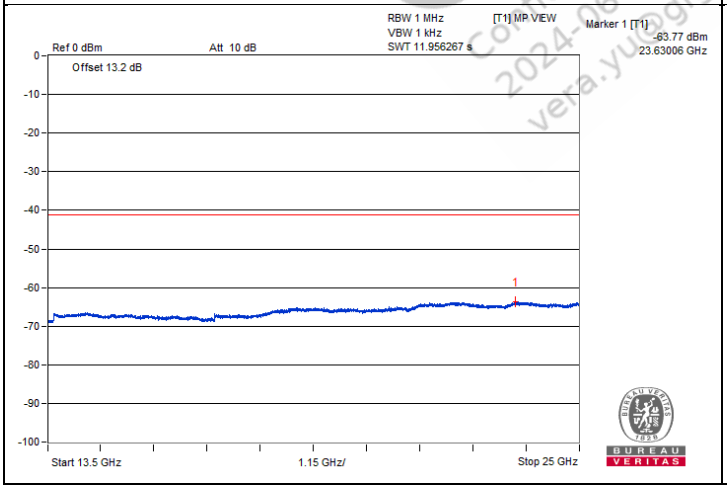

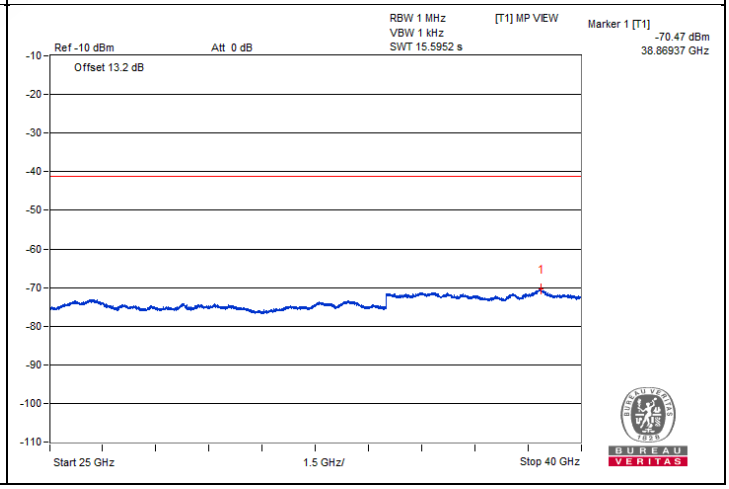

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.87	59.94 PK	74	-14.06	-45.12	-44.42	6.43	-35.32
2	5350.1	48.18 AV	54	-5.82	-57.24	-55.9	6.43	-47.08

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

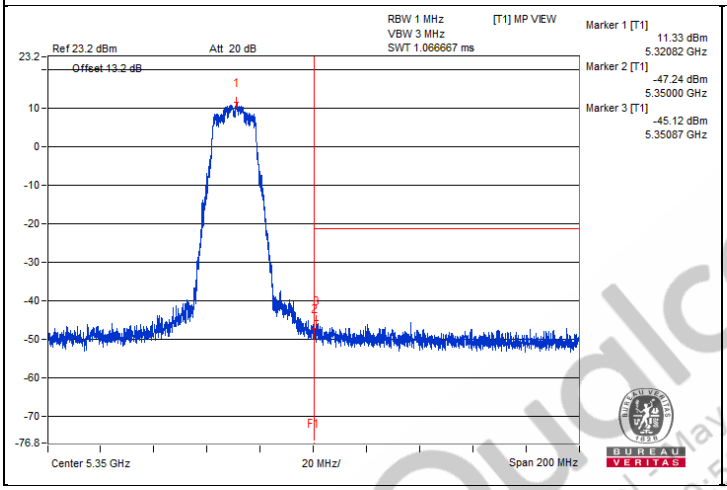

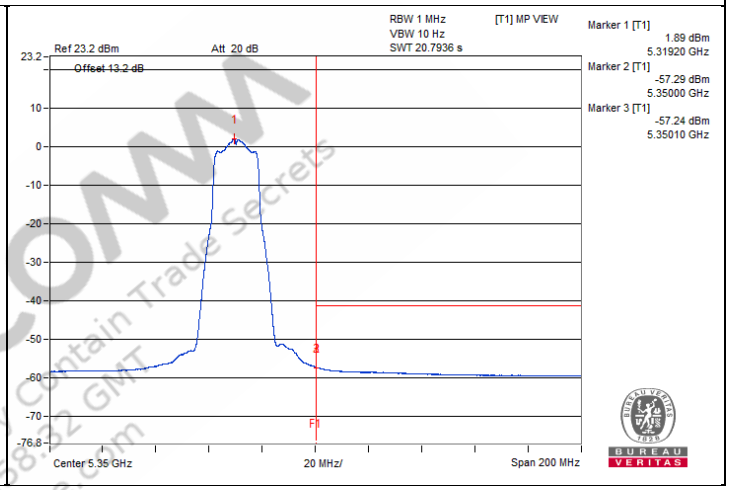

Chain 1

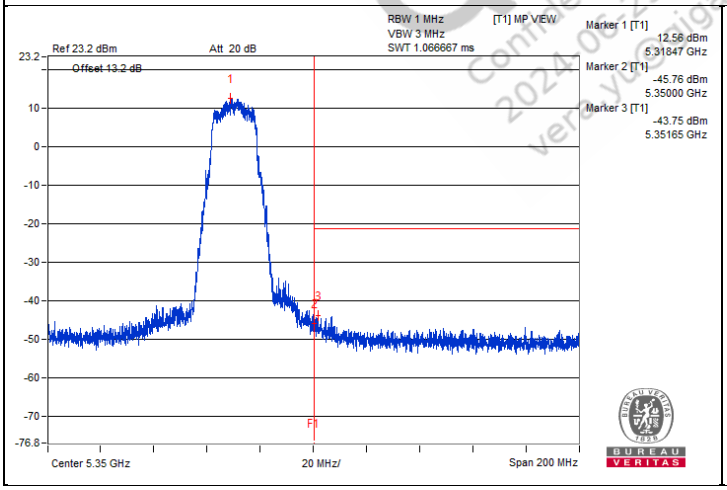

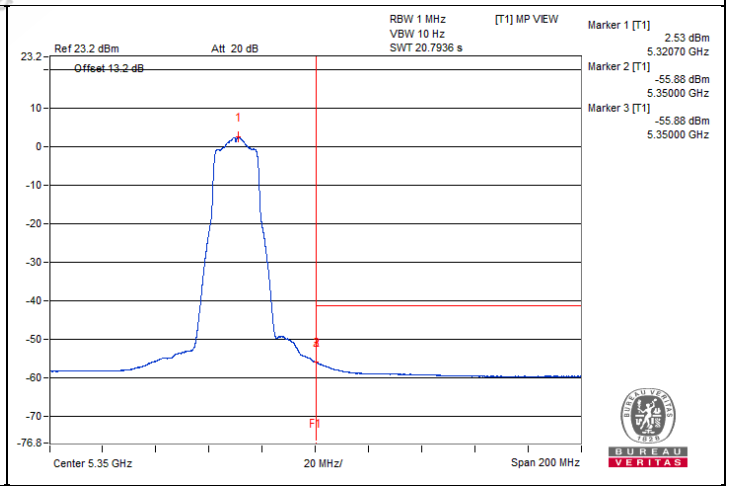

QualcOMM Confidential & Contain Trade Secrets
2024-06-25 00:58:32 GMT
Vera Yu@gigabyte.com

802.11a - Channel 100

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3678.12	60.64 PK	74	-13.36	-44.54	-47.59	8.17	-34.62
2	3684.37	49.2 AV	54	-4.8	-57.16	-57.33	8.17	-46.06
3	7348.43	59.39 PK	74	-14.61	-48.5	-45.96	8.17	-35.87
4	7332.81	48.12 AV	54	-5.88	-58.25	-58.4	8.17	-47.14
5	10989.06	59.96 PK	74	-14.04	-48.17	-45.27	8.17	-35.30
6	11014.06	48.67 AV	54	-5.33	-57.81	-57.73	8.17	-46.59
7	#16492.87	47.37 PK	68.2	-20.83	-58.61	-59.58	8.17	-47.89


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

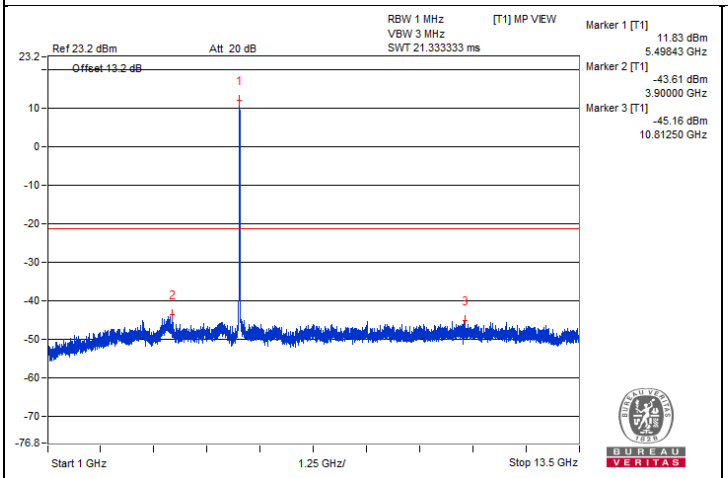


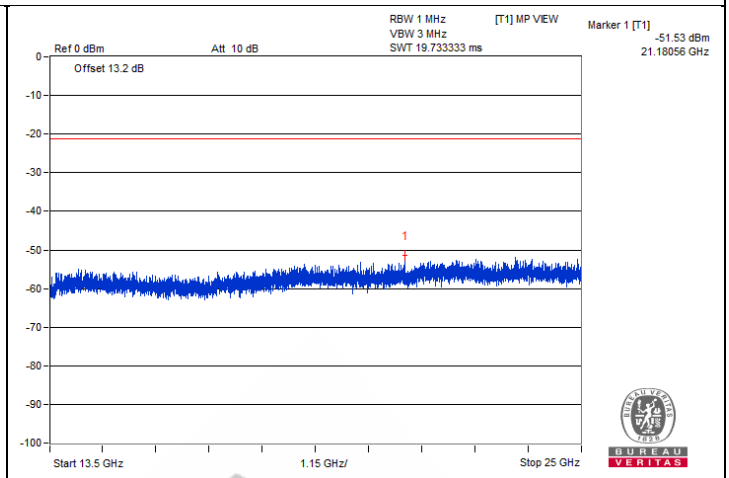

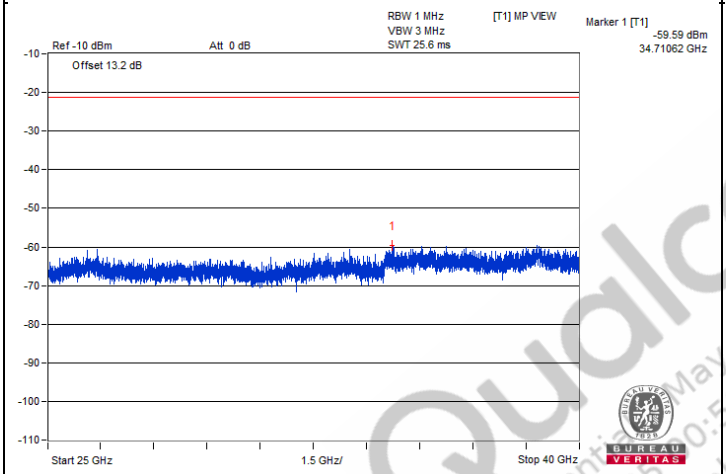

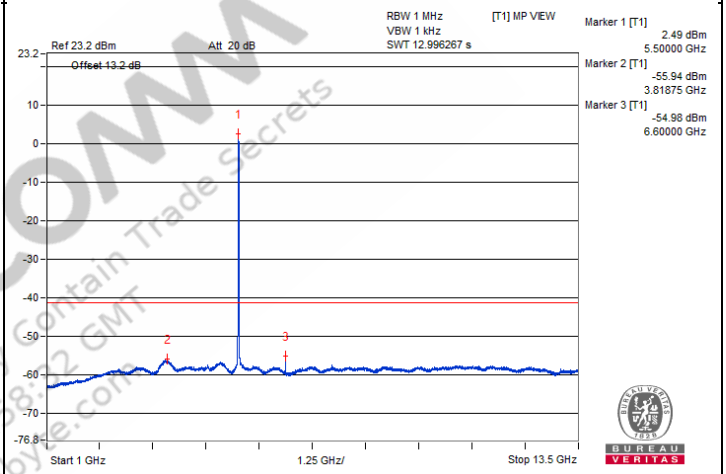


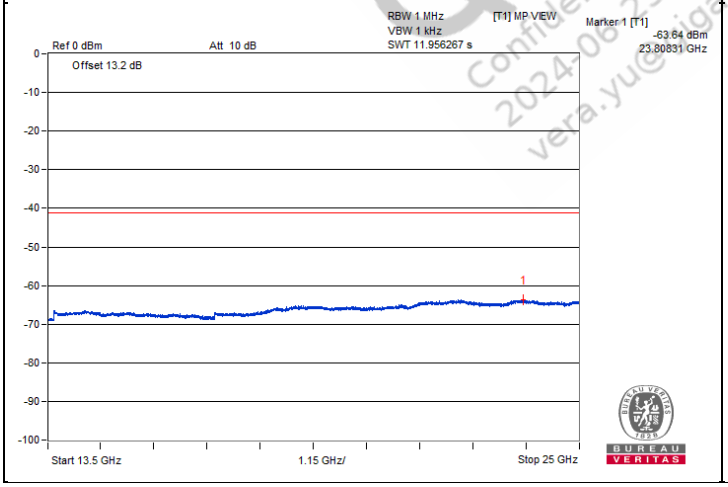


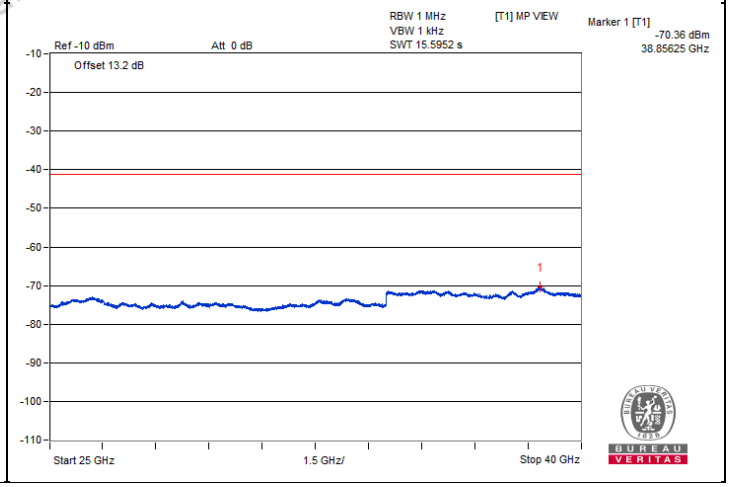



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

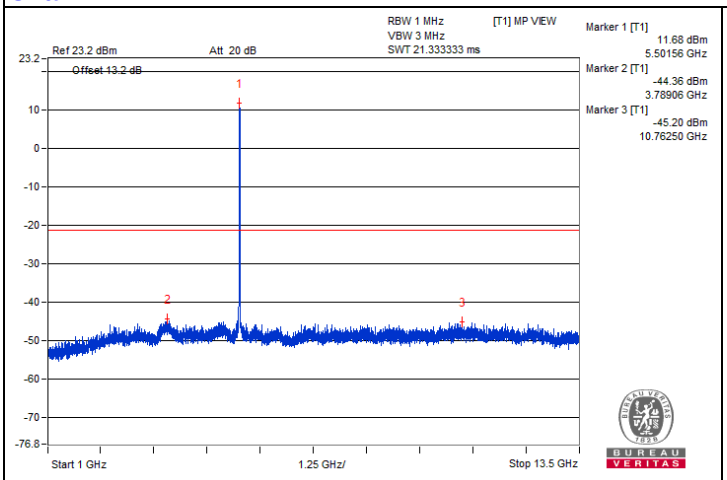


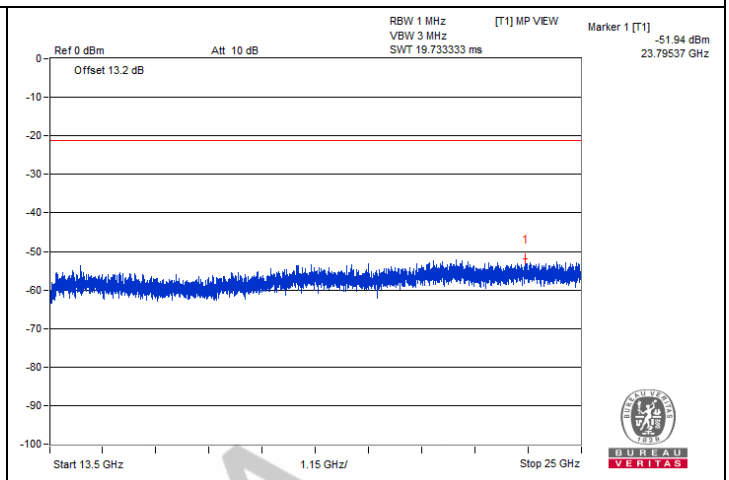

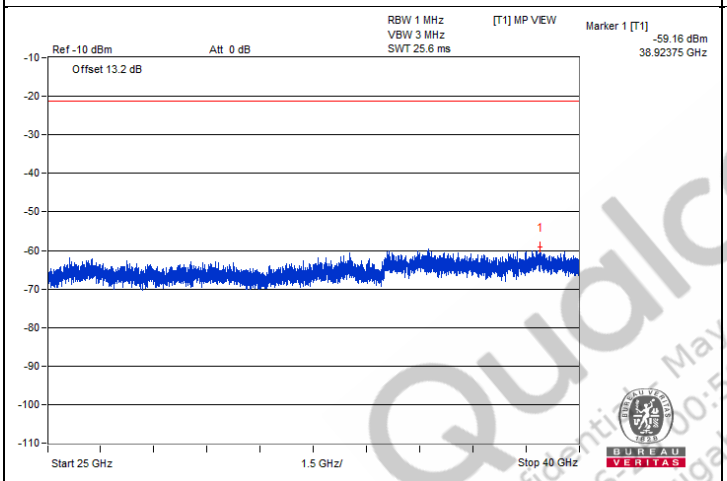

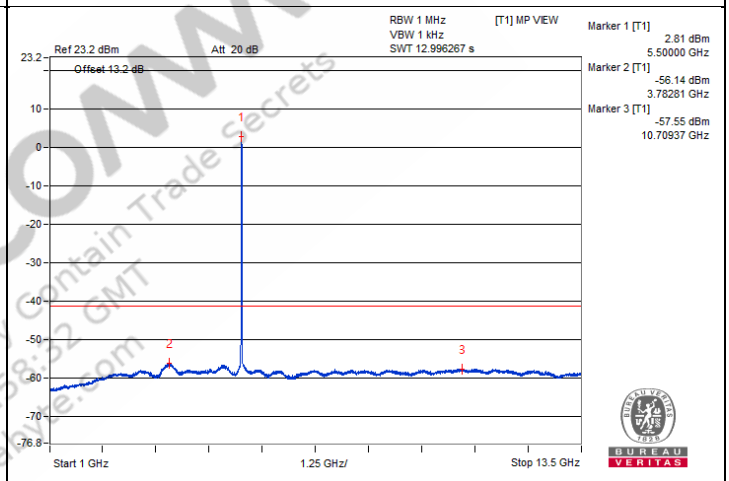

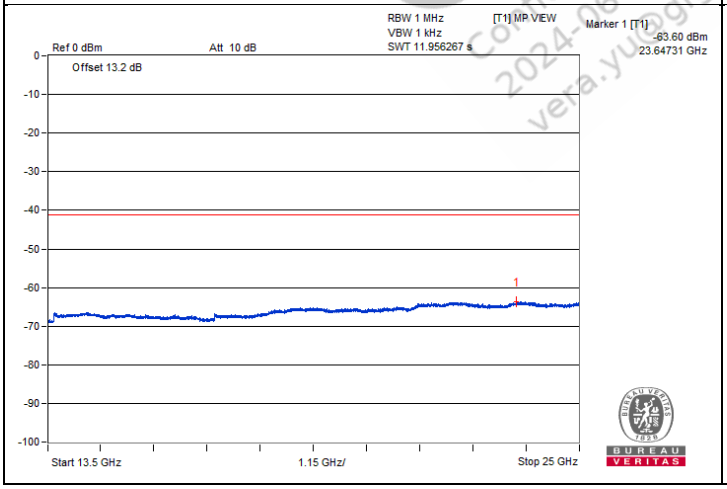

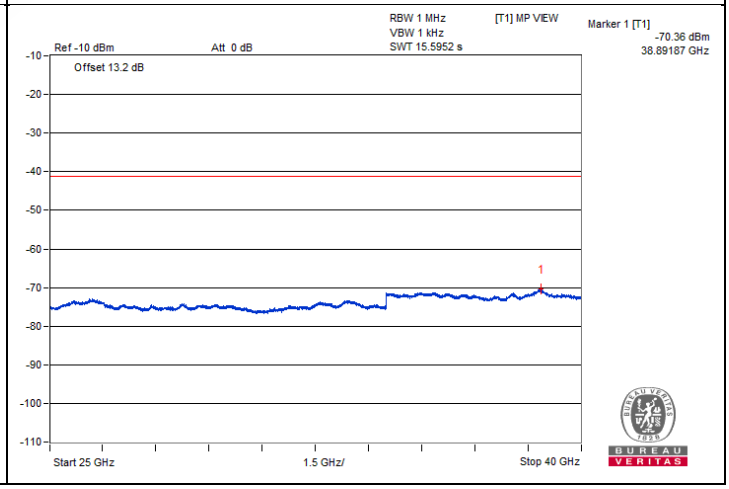

QualcoMM
Confidential - May Contain Trade secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5458.62	59.73 PK	74	-14.27	-45.07	-48.2	7.82	-35.53
2	5459.84	48.65 AV	54	-5.35	-57.59	-57.3	7.82	-46.61
3	#5466.75	59.82 PK	68.2	-8.38	-47.05	-45.61	7.82	-35.44

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

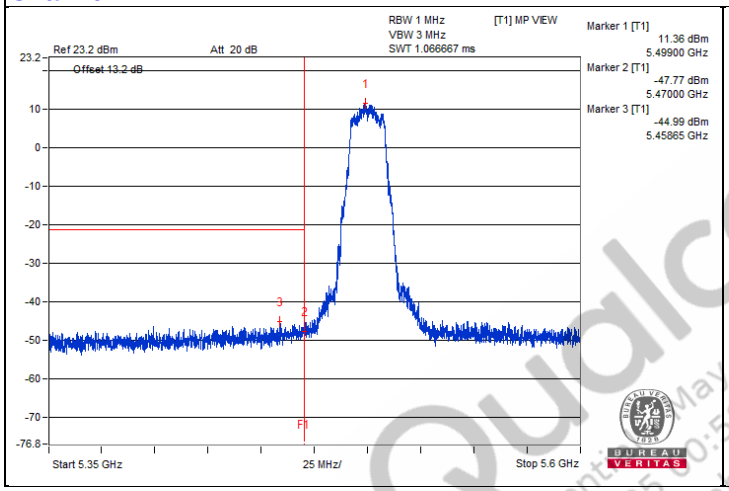

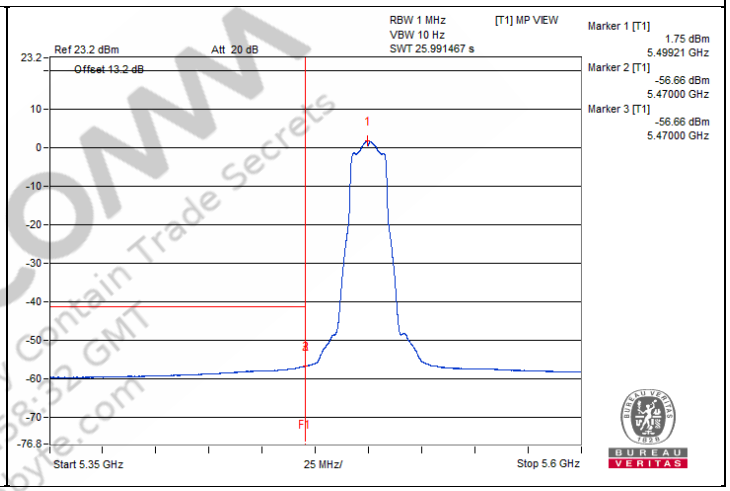

Chain 1

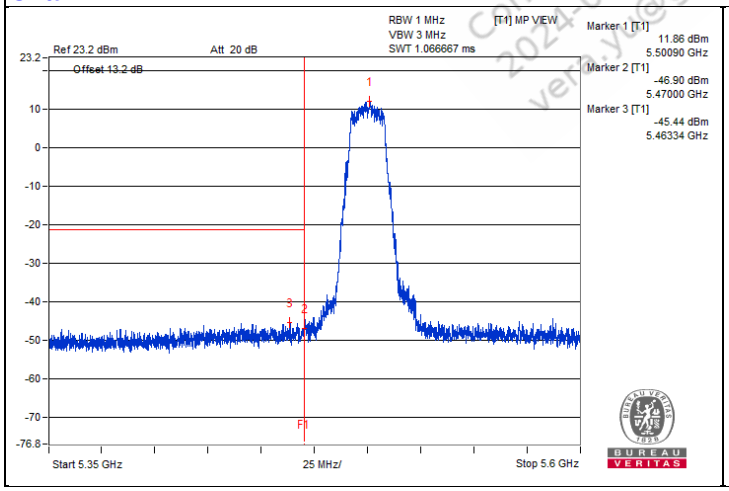

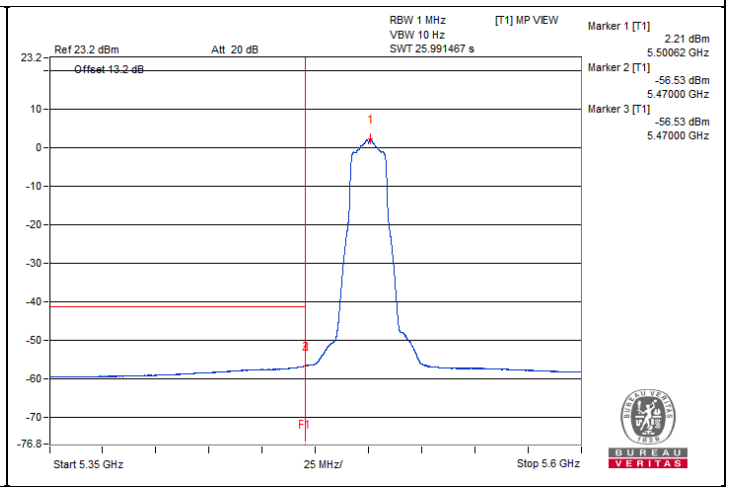

Qualcomm Confidential and Proprietary – May Contain Trade Secrets
2021-06-25 10:58:32 GMT
ver: yw@gigabyte.com

802.11a - Channel 116

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3739.06	60.84 PK	74	-13.16	-47.78	-44.16	8.17	-34.42
2	3739.06	49.84 AV	54	-4.16	-56.57	-56.63	8.17	-45.42
3	7440.62	58.32 PK	74	-15.68	-48.43	-47.83	8.17	-36.94
4	7432.81	47.35 AV	54	-6.65	-59.06	-59.12	8.17	-47.91
5	11154.68	59.48 PK	74	-14.52	-47.14	-46.78	8.17	-35.78
6	11145.31	48.47 AV	54	-5.53	-57.86	-58.08	8.17	-46.79
7	#16720	48.31 PK	68.2	-19.89	-59.42	-57.14	8.17	-46.95


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

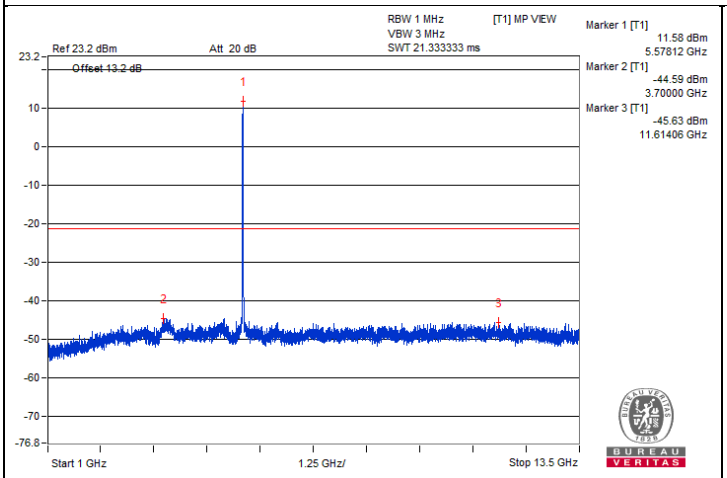


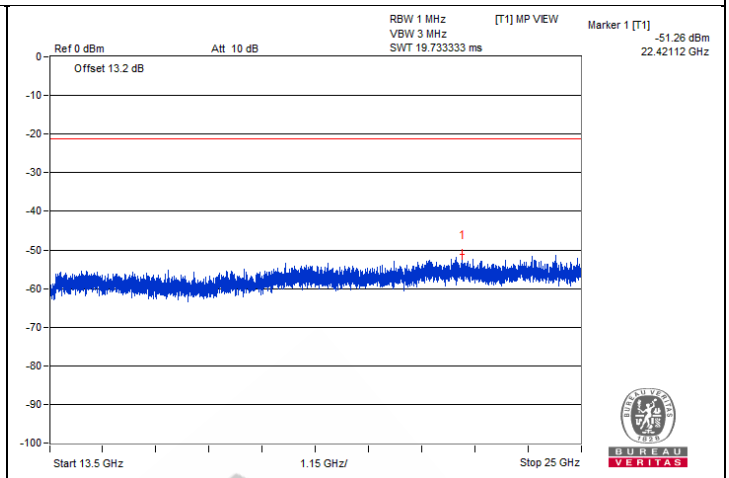

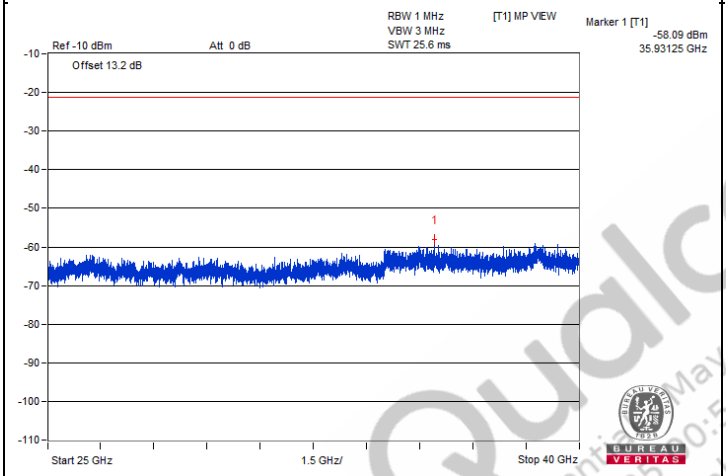

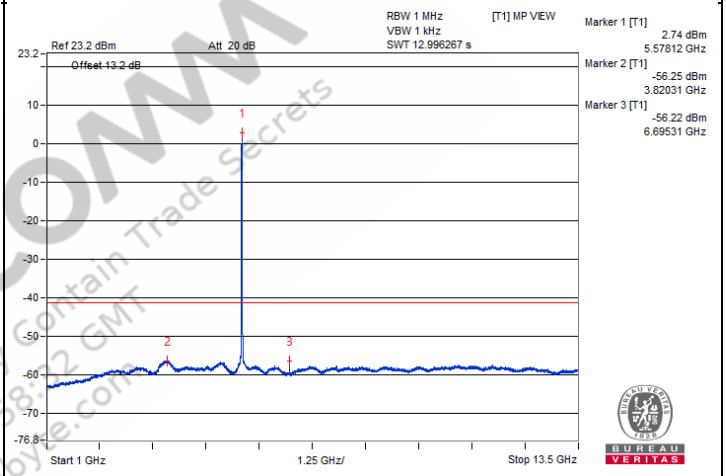


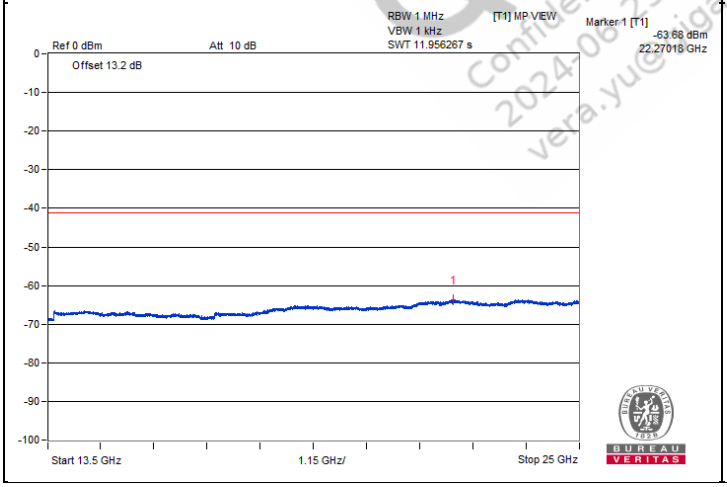


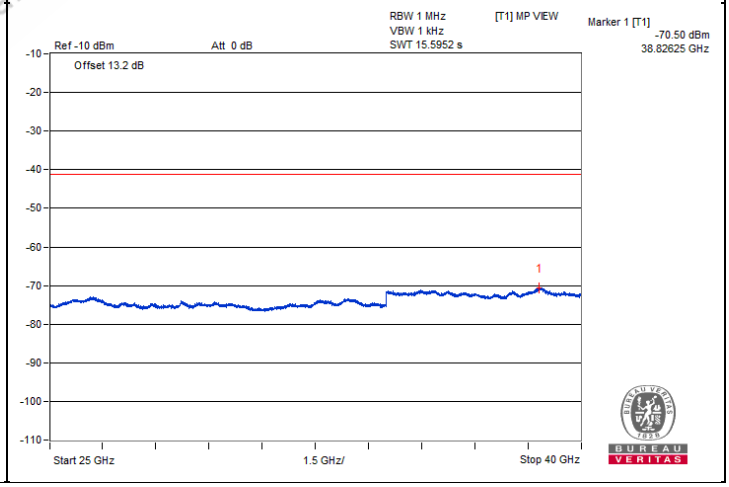



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

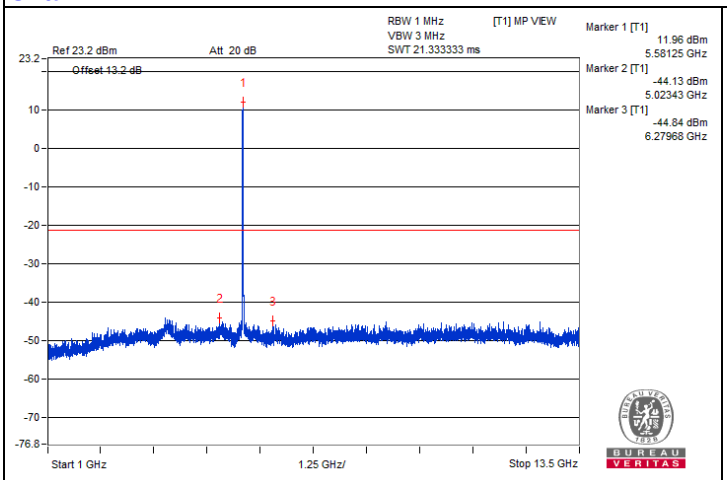


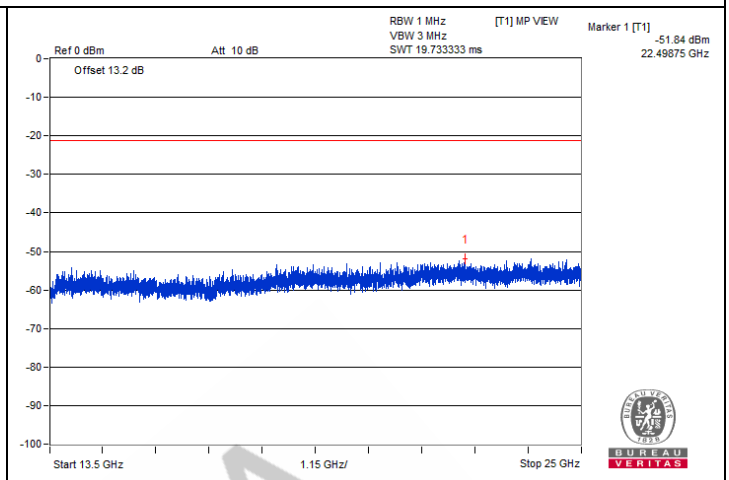

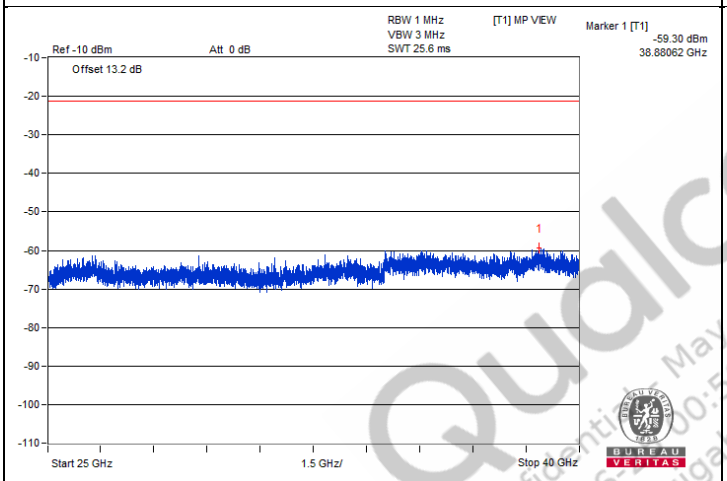

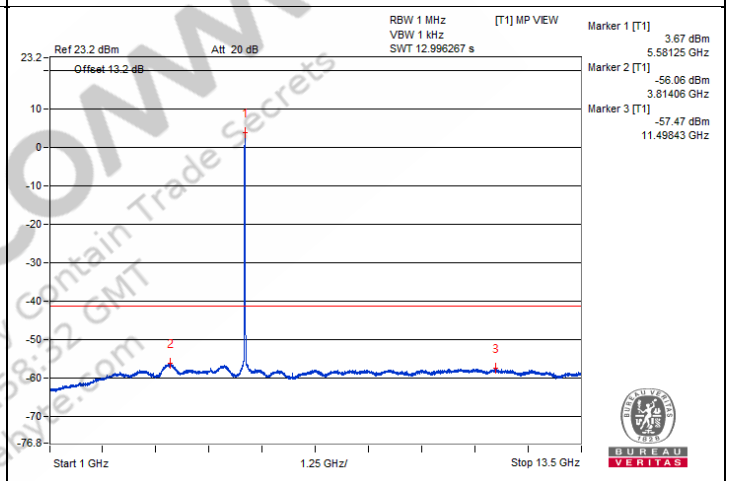

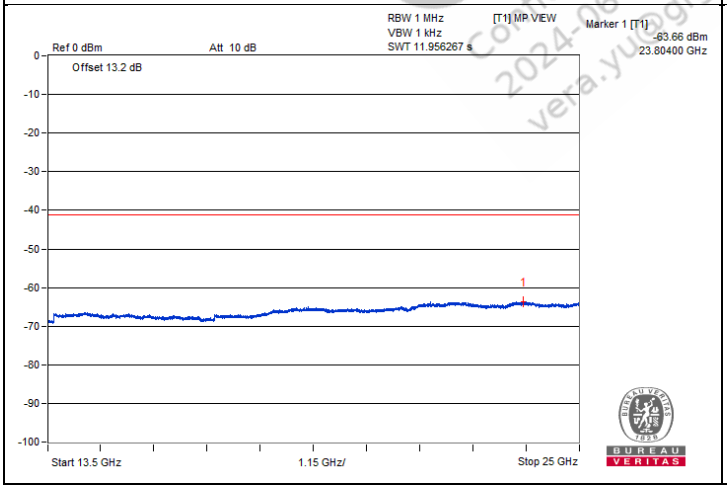

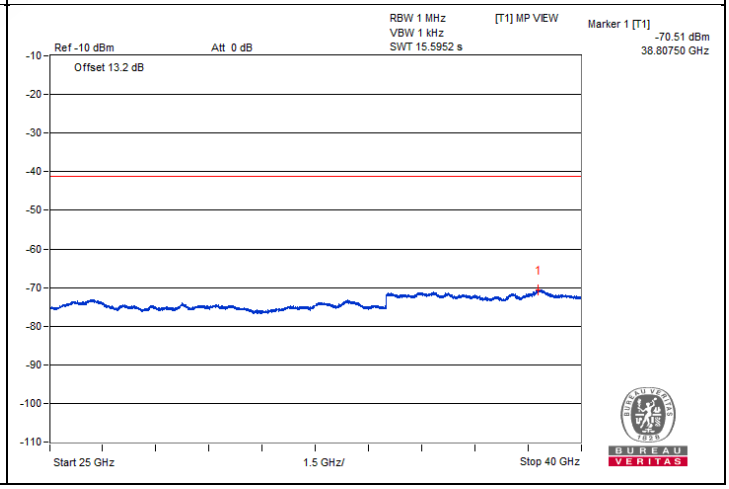

QualcoMM
Confidential - May Contain Trade secrets
2024-06-20 00:58:32 GMT
vera.yu@qgraive.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5441.25	58.28 PK	74	-15.72	-48.88	-46.96	7.82	-36.98
2	5459.62	47.19 AV	54	-6.81	-58.91	-58.89	7.82	-48.07
3	#5465.87	58.66 PK	68.2	-9.54	-45.91	-49.8	7.82	-36.60


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

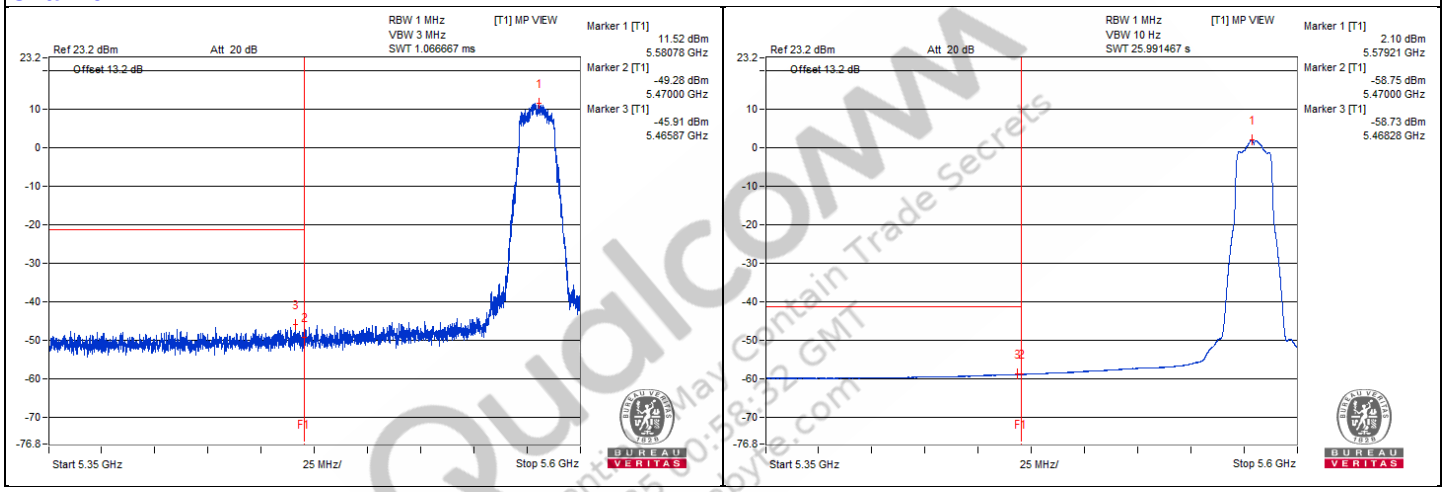

Chain 1

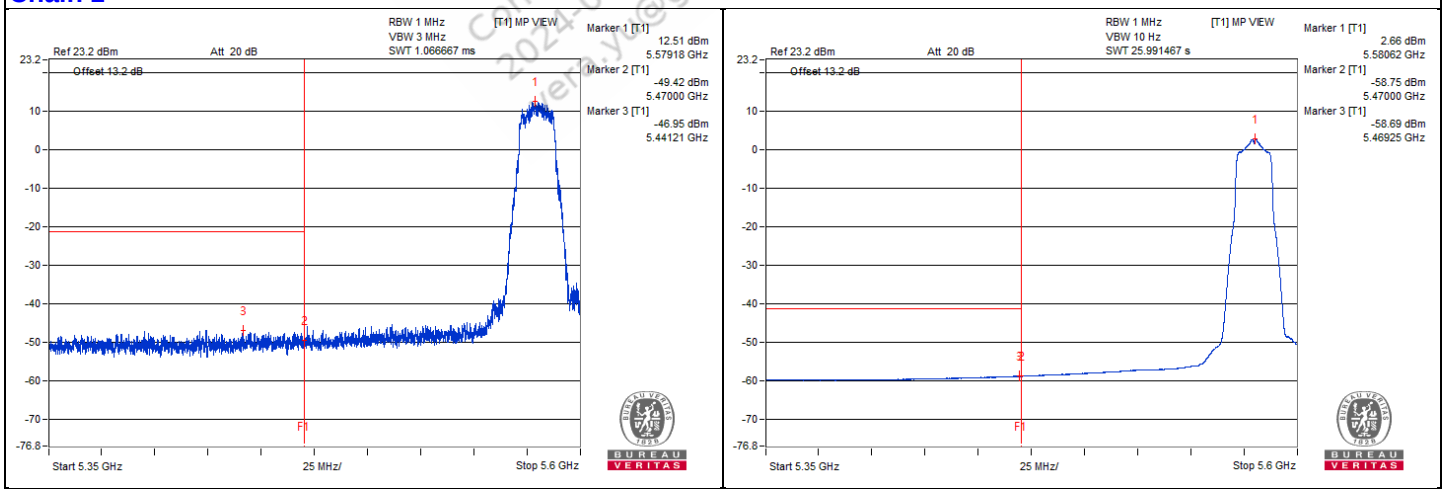

Qualcomm
Confidential and May Contain Trade Secrets
2021-06-25 10:58:32 GMT
eric.yu@gigabyte.com

802.11a - Channel 140

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3803.12	61.19 PK	74	-12.81	-45.33	-45.17	8.17	-34.07
2	3784.37	50.17 AV	54	-3.83	-56.6	-55.97	8.17	-45.09
3	7593.75	58.32 PK	74	-15.68	-48.12	-48.13	8.17	-36.94
4	7585.93	47.93 AV	54	-6.07	-58.51	-58.52	8.17	-47.33
5	11385.93	58.73 PK	74	-15.27	-47.05	-48.49	8.17	-36.53
6	11396.87	48.47 AV	54	-5.53	-57.91	-58.03	8.17	-46.79
7	#17099.5	49.84 PK	68.2	-18.36	-56.56	-56.65	8.17	-45.42


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

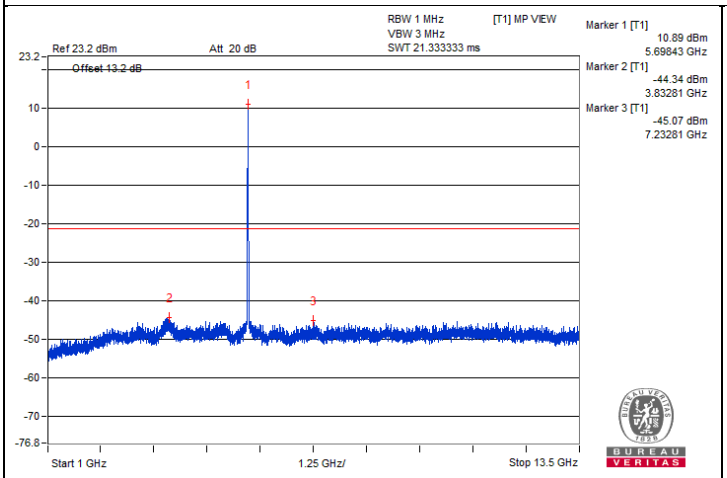


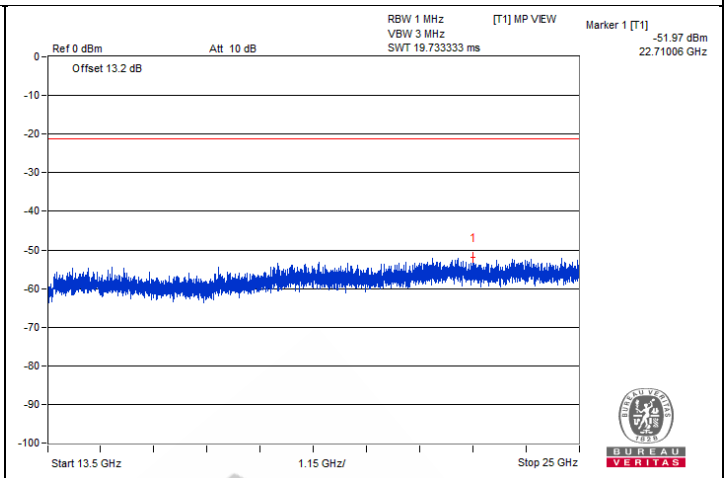

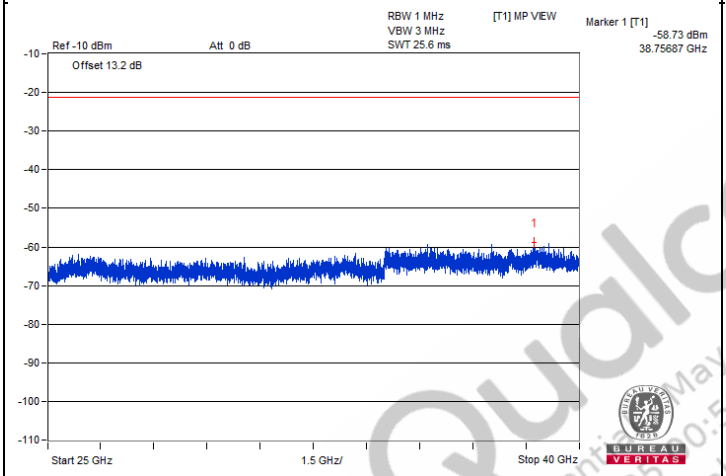

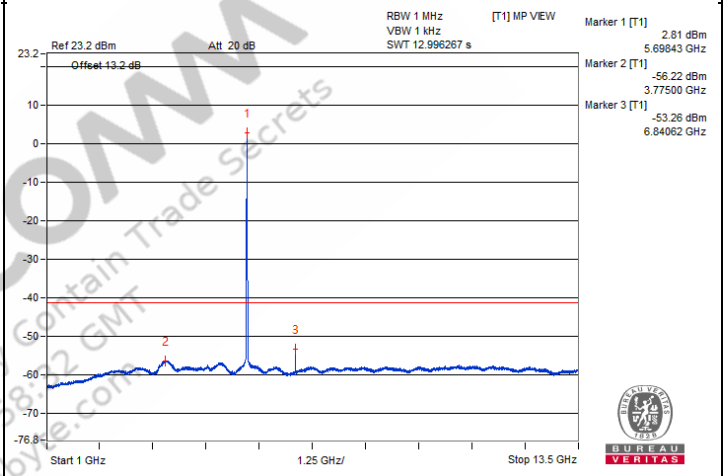


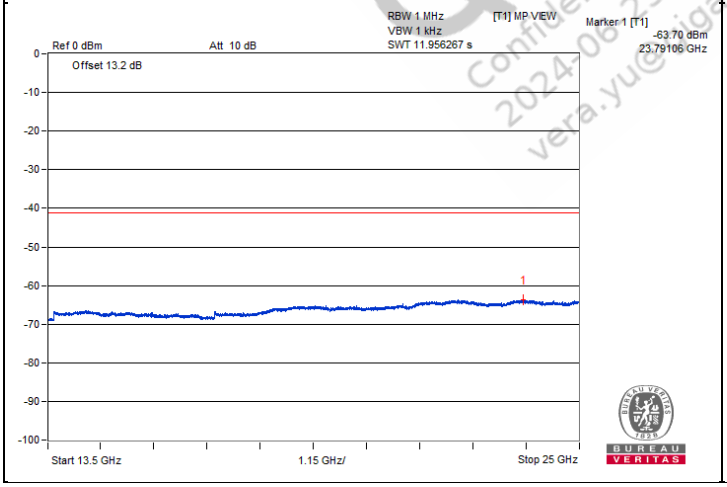


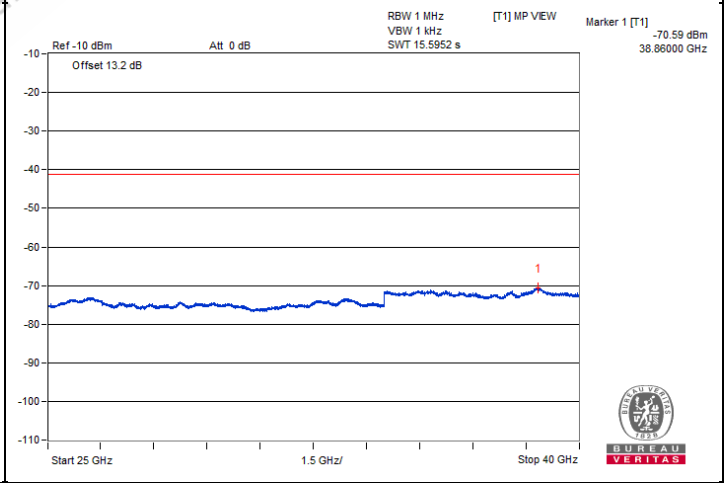



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

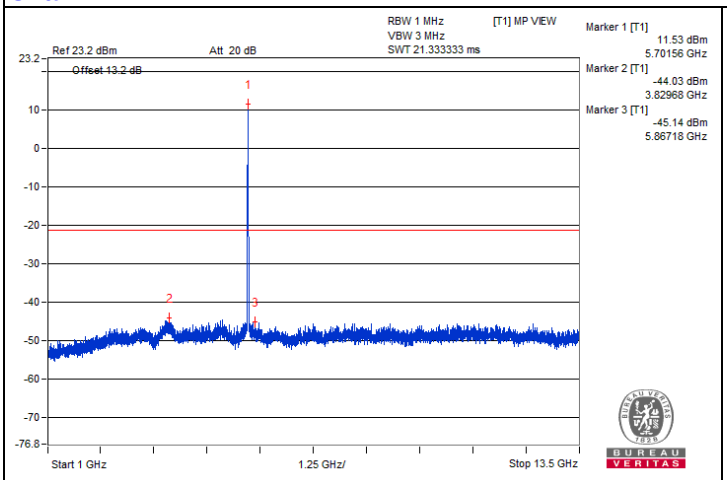


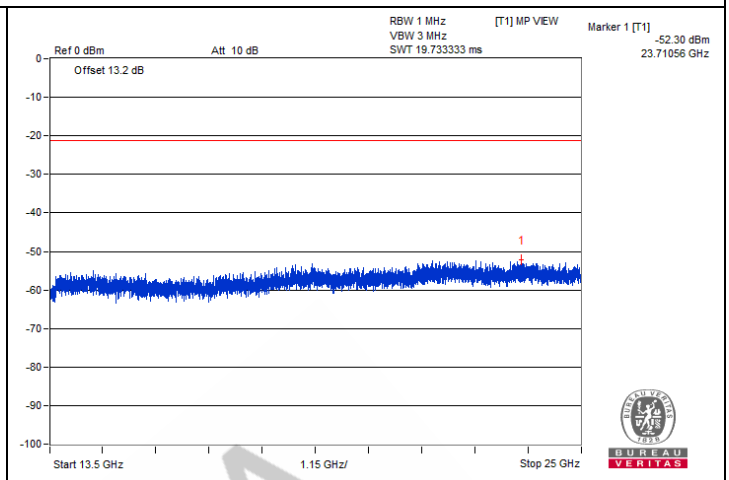

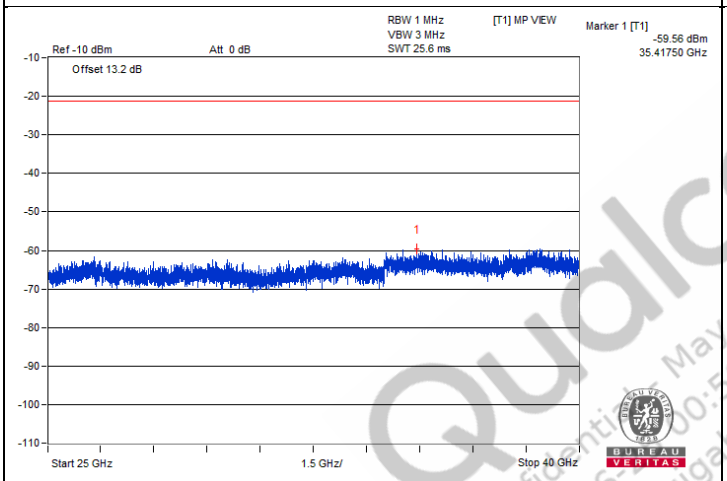

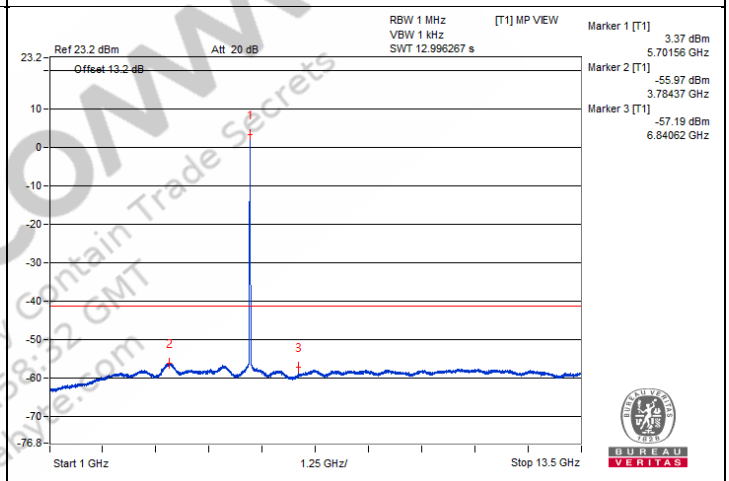

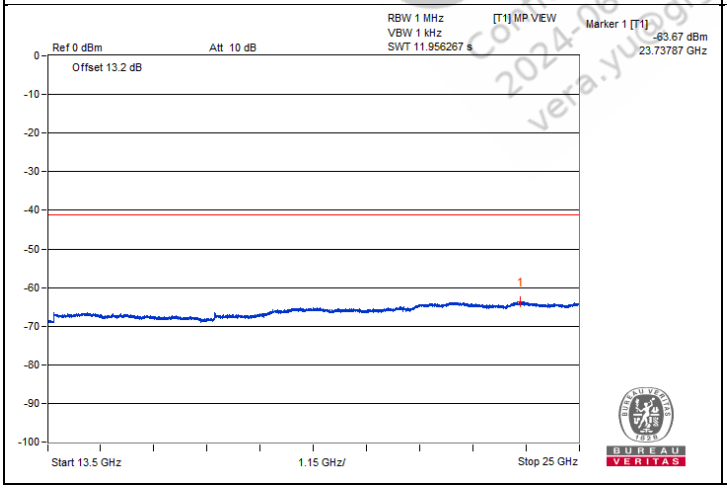

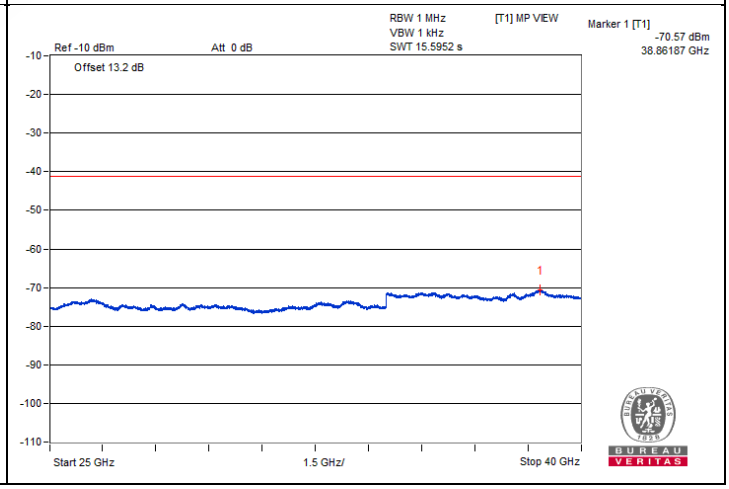

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5725	62.7 PK	68.2	-5.5	-43.18	-43.61	7.82	-32.56

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

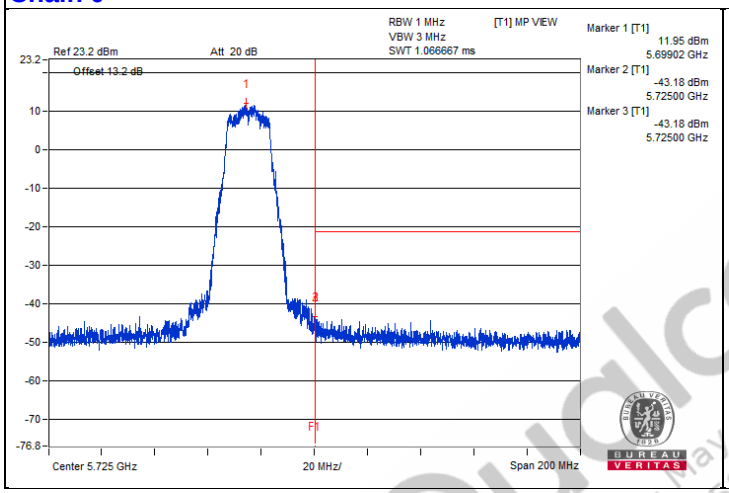

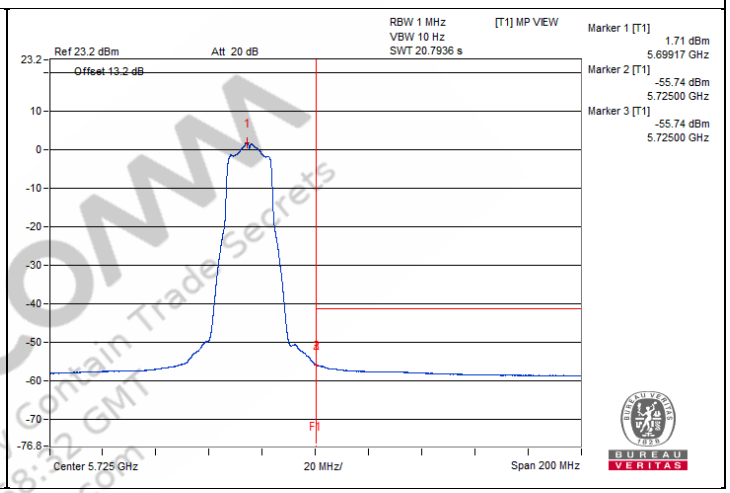

Chain 1

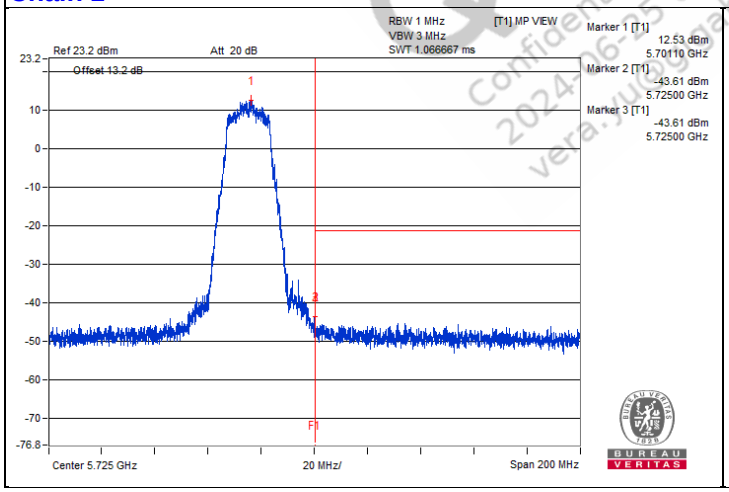

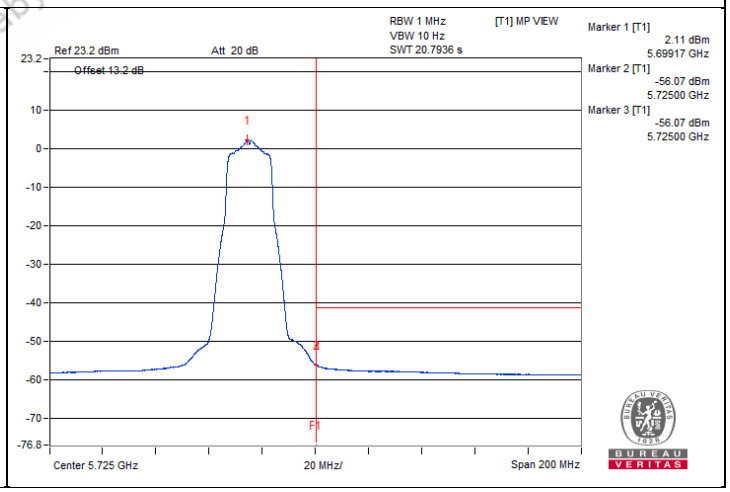

QualComm Confidential - May Contain Trade Secrets 2024-06-25 00:58:12 GMT vera.jurgensbyte.com

802.11a - Channel 144

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3812.5	61.58 PK	74	-12.42	-44.05	-45.86	8.17	-33.68
2	3810.93	50.07 AV	54	-3.93	-56.42	-56.32	8.17	-45.19
3	7607.81	58.92 PK	74	-15.08	-48.11	-47	8.17	-36.34
4	7643.75	48 AV	54	-6	-58.53	-58.36	8.17	-47.26
5	11457.81	59.7 PK	74	-14.3	-47.15	-46.36	8.17	-35.56
6	11454.68	48.61 AV	54	-5.39	-57.98	-57.68	8.17	-46.65
7	#17164.18	49.81 PK	68.2	-18.39	-57.92	-55.63	8.17	-45.45


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

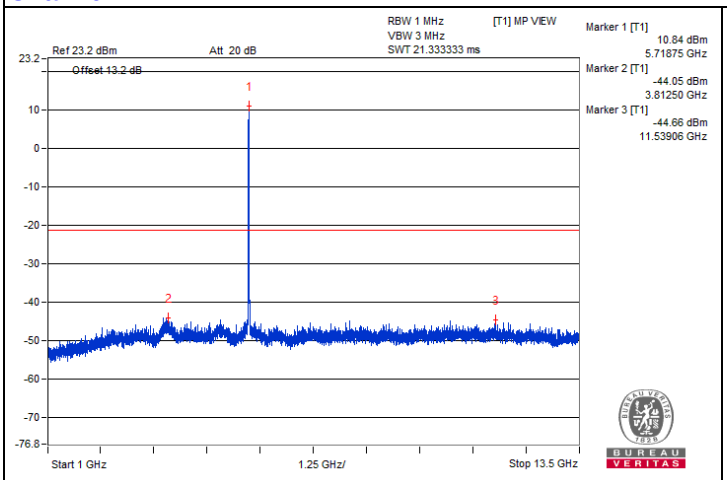


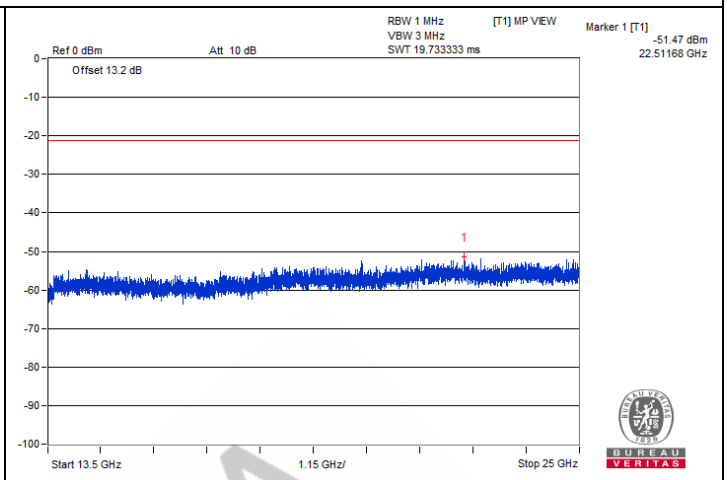

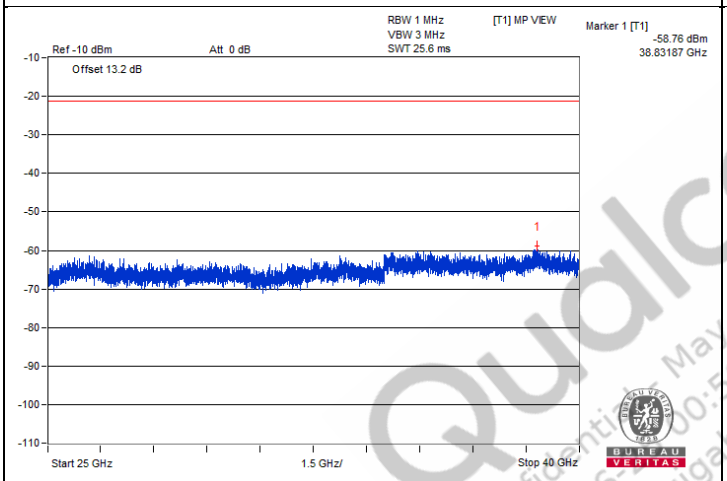

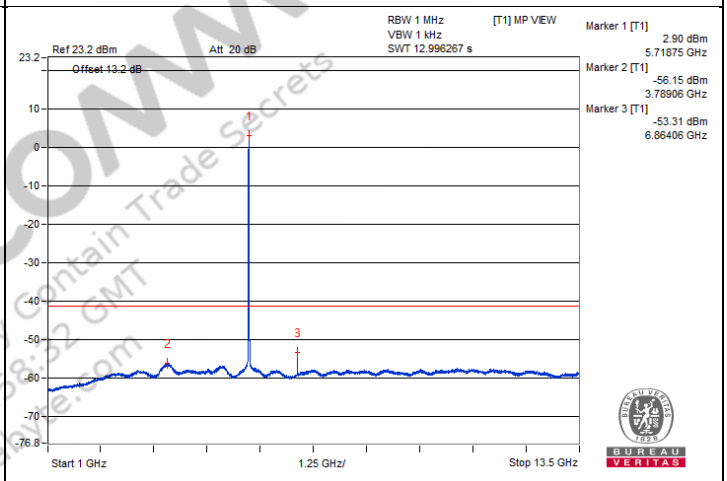


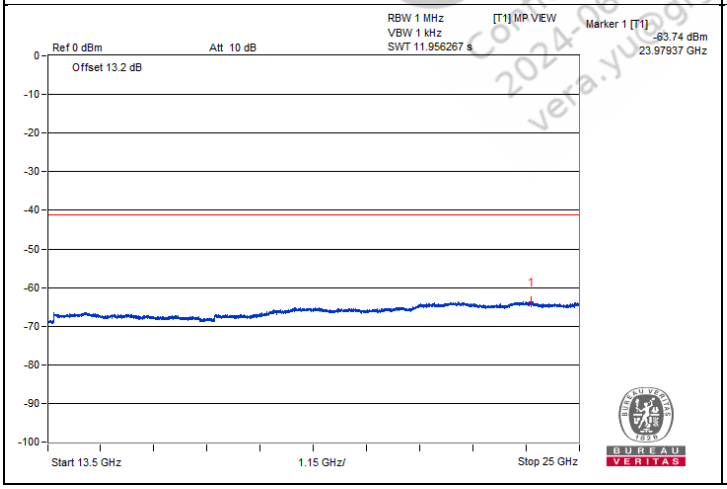


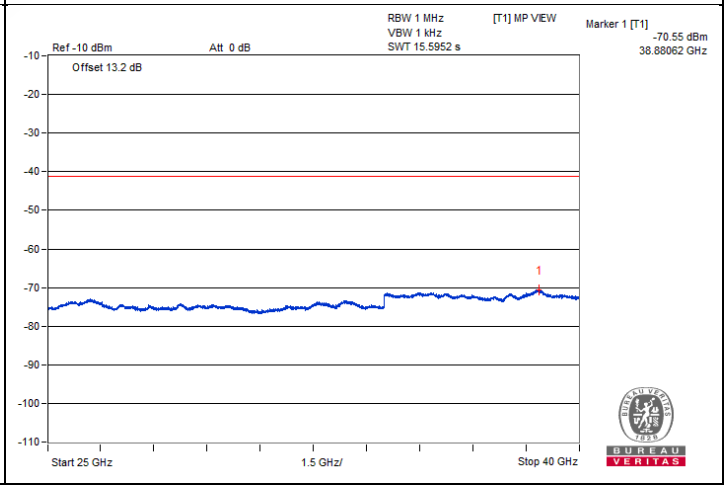



QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Chain 1

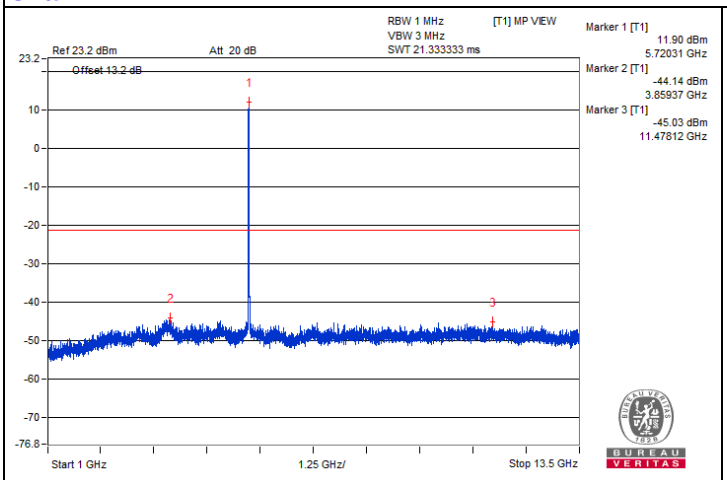


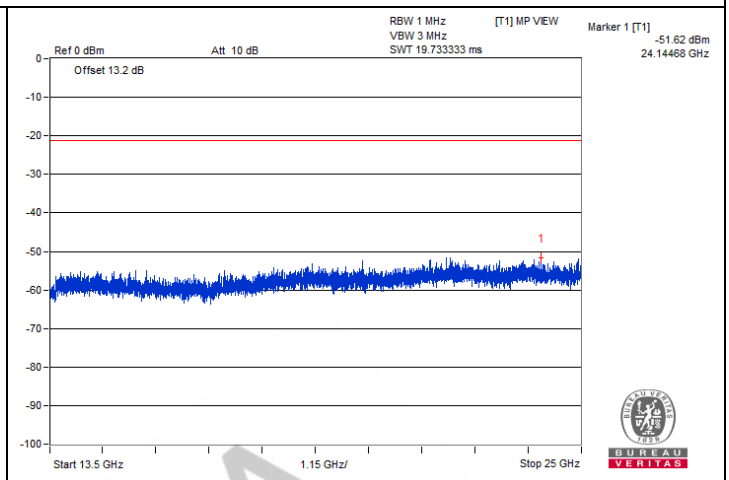

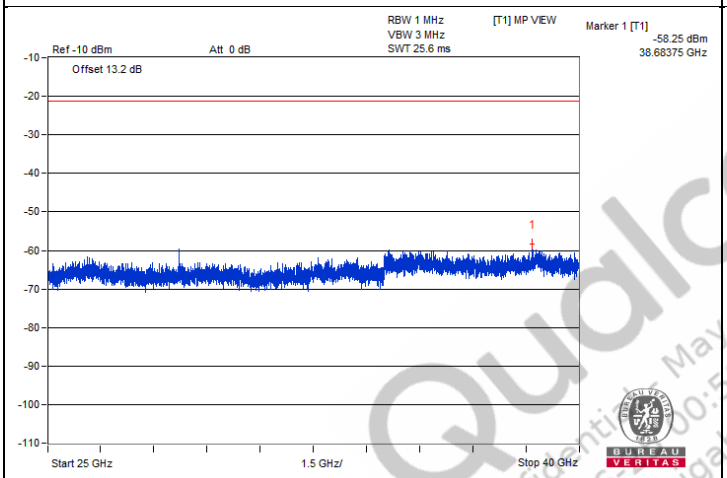

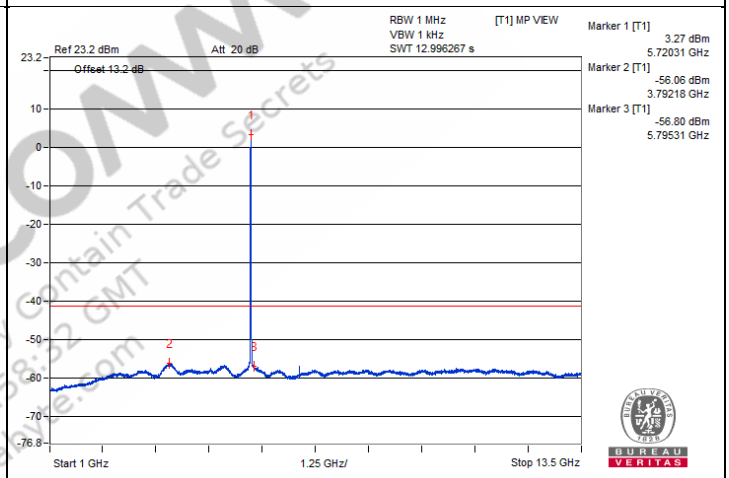

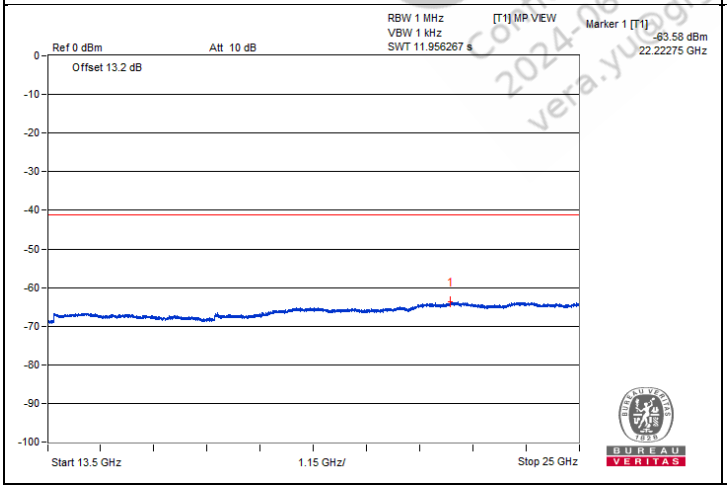

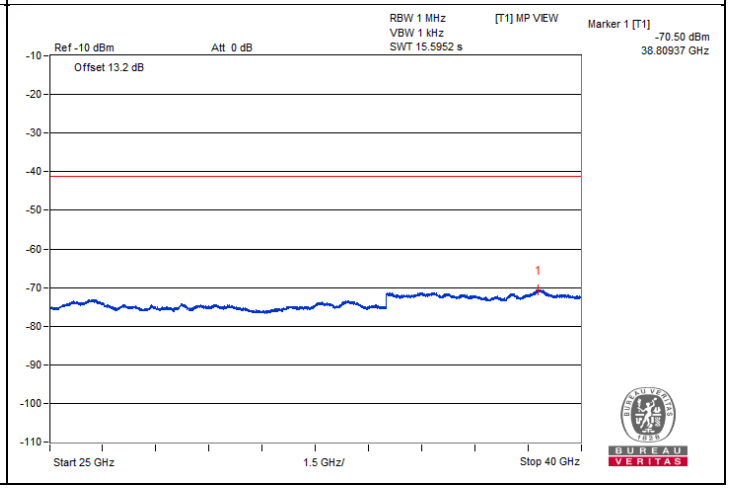

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5859.47	59.21 PK	68.2	-8.99	-48.16	-45.9	7.82	-36.05


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

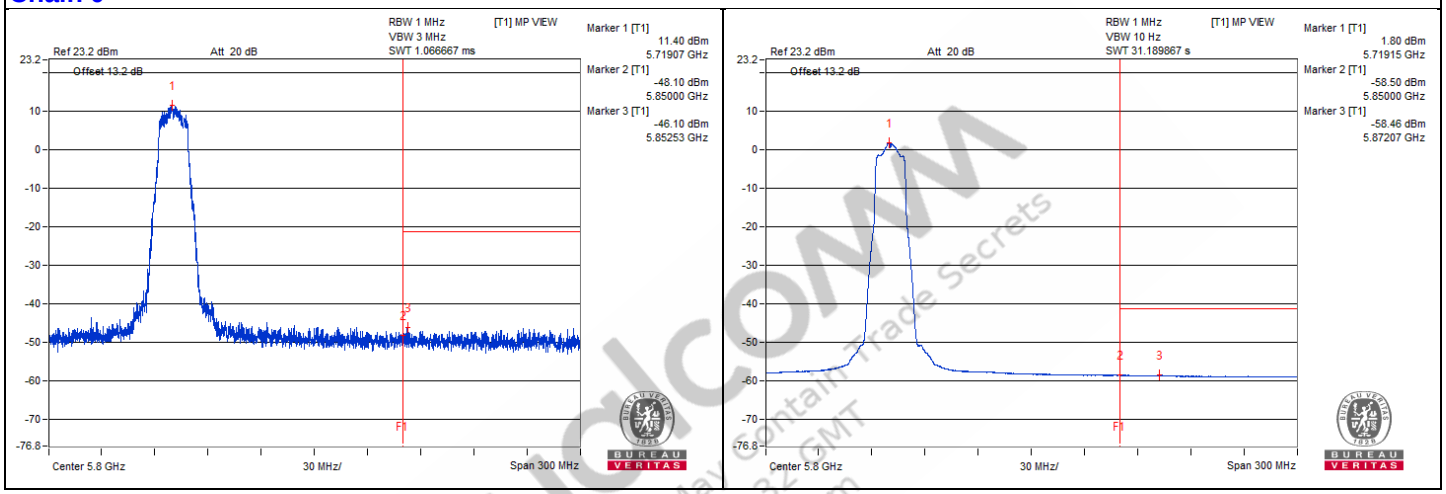

Chain 1

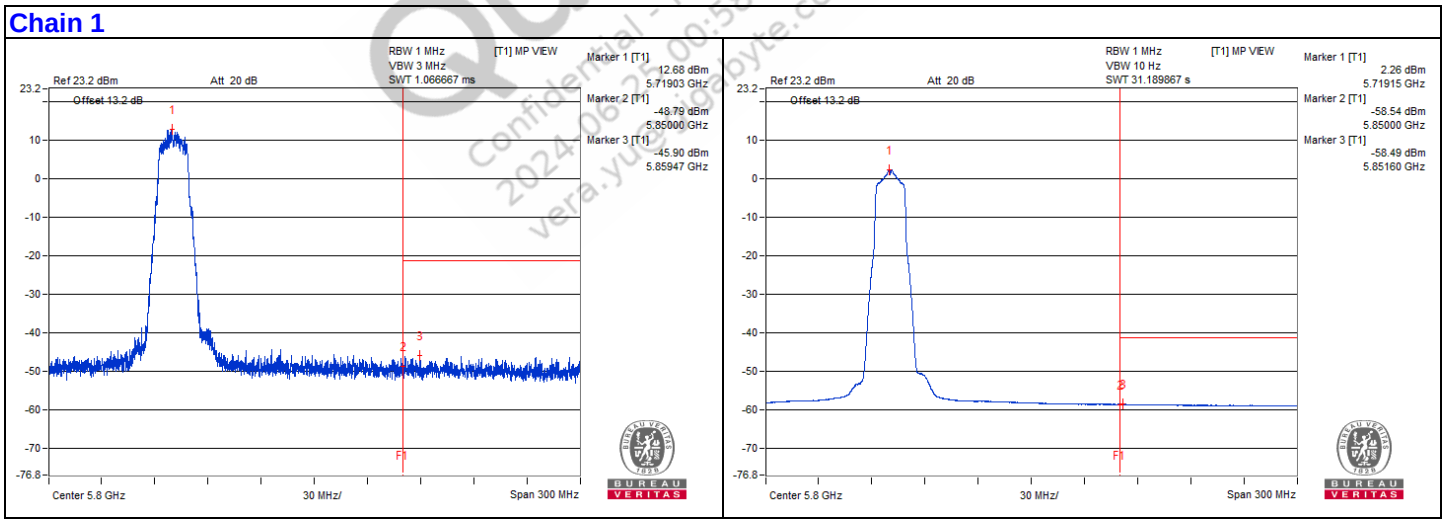

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

802.11a – Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3835.93	61.49 PK	74	-12.51	-44.76	-45.15	8.17	-33.77
2	3814.06	50.13 AV	54	-3.87	-56.44	-56.19	8.17	-45.13
3	7660.93	59.21 PK	74	-14.79	-48.51	-46.24	8.17	-36.05
4	7671.87	48.11 AV	54	-5.89	-58.27	-58.4	8.17	-47.15
5	11484.37	59.21 PK	74	-14.79	-47.38	-47.08	8.17	-36.05
6	11485.93	48.69 AV	54	-5.31	-57.9	-57.61	8.17	-46.57
7	#17237.5	50.45 PK	68.2	-17.75	-57.15	-55.08	8.17	-44.81


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

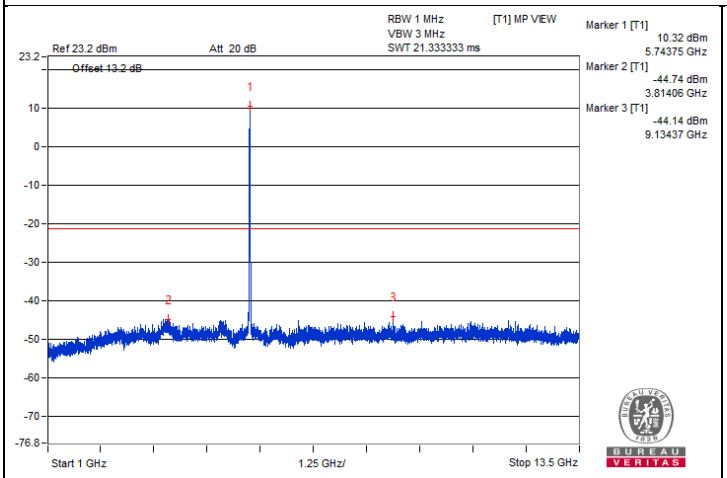


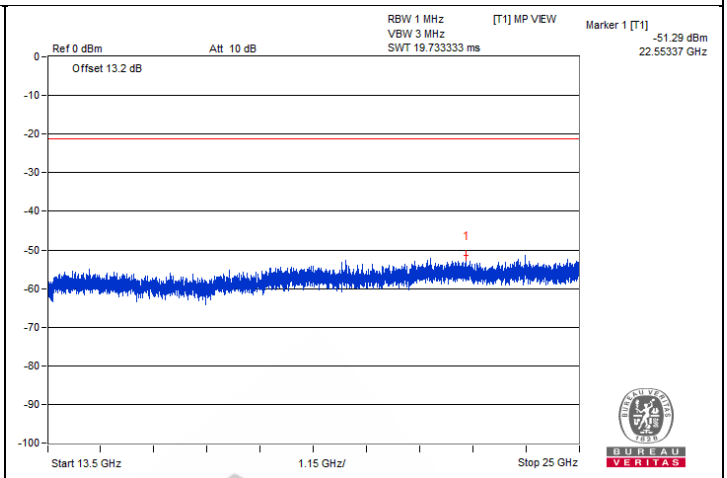

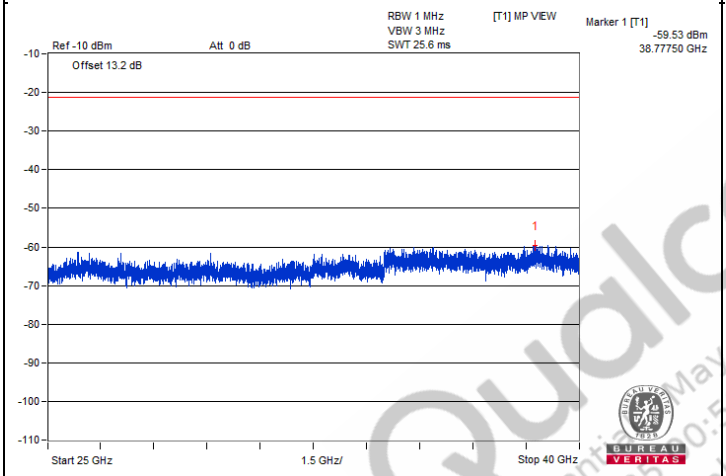

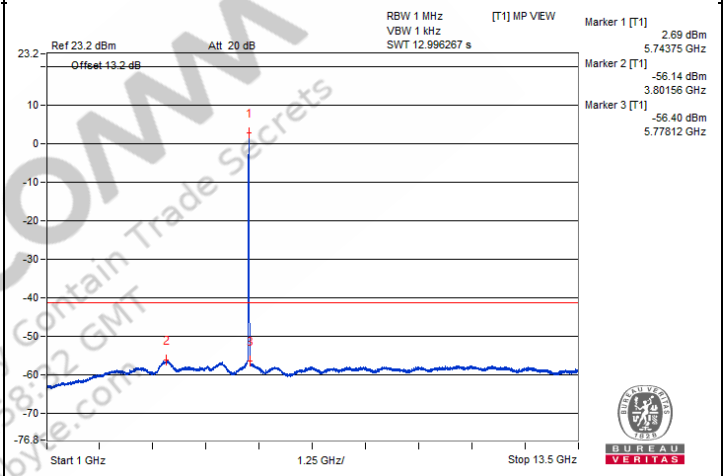


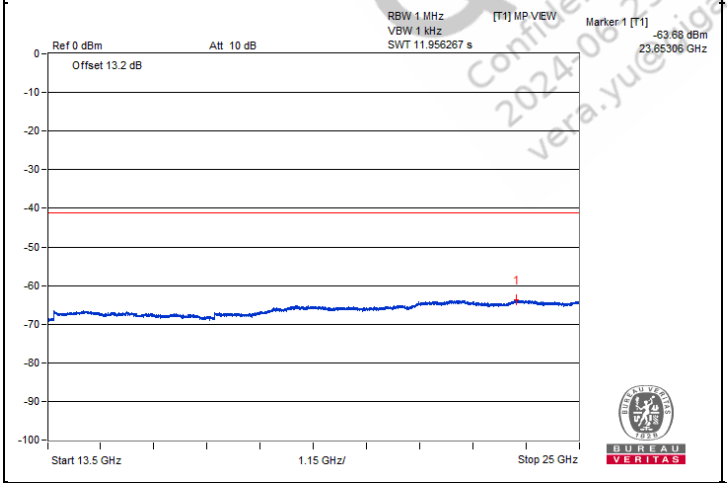


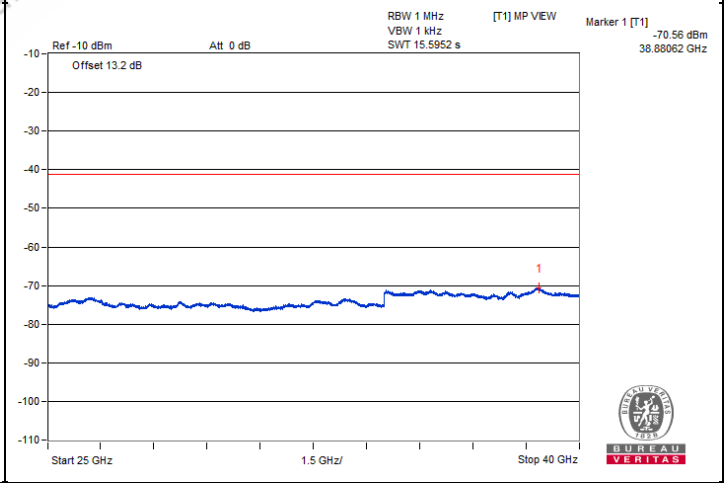



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

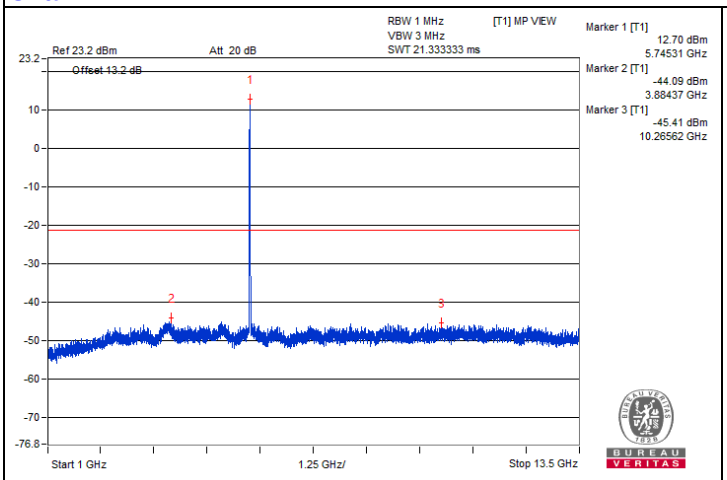


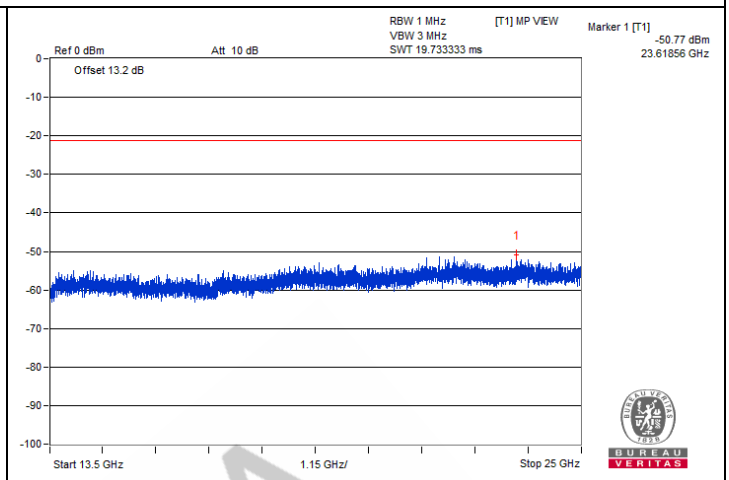

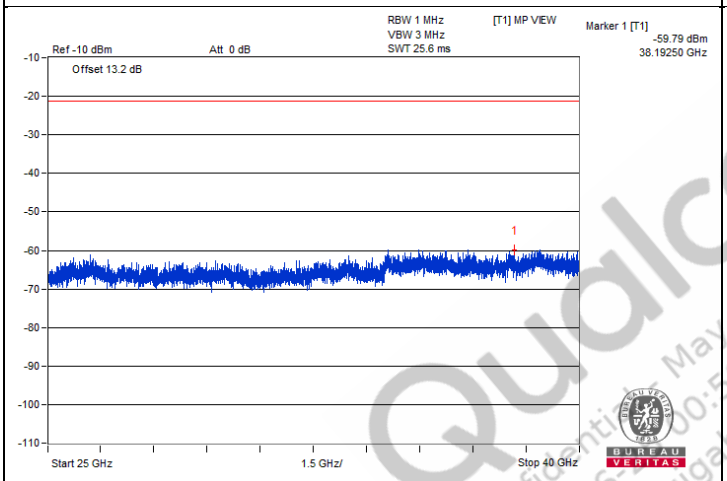

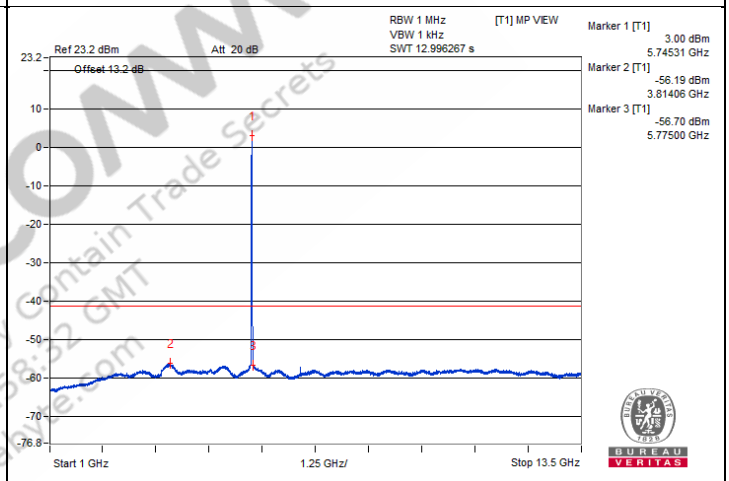

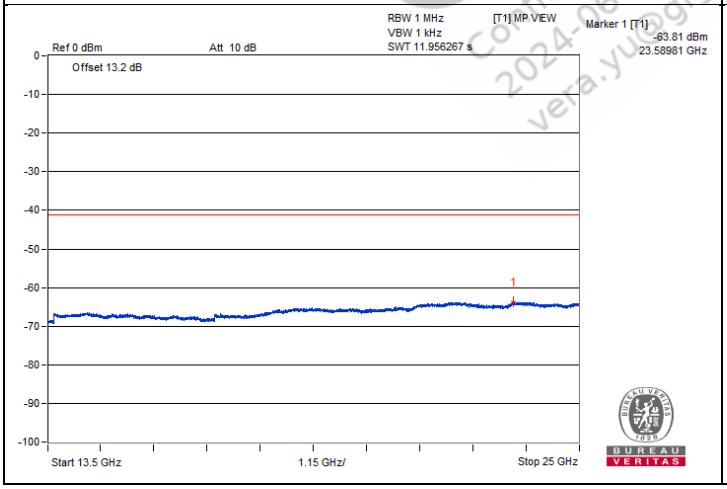


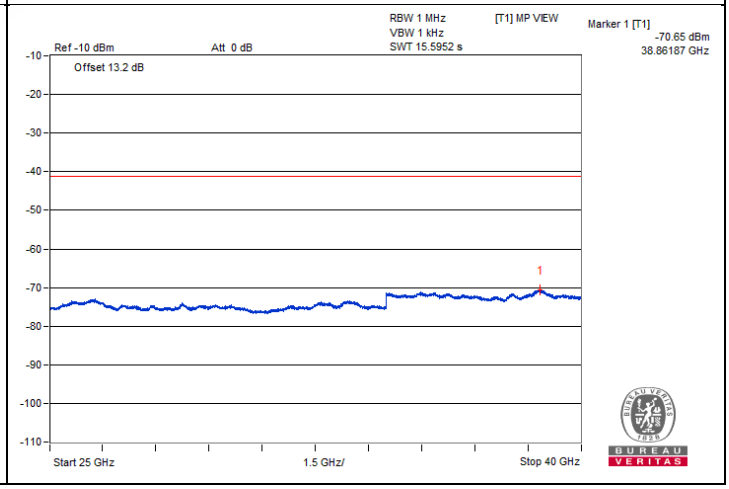

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

Chain 0

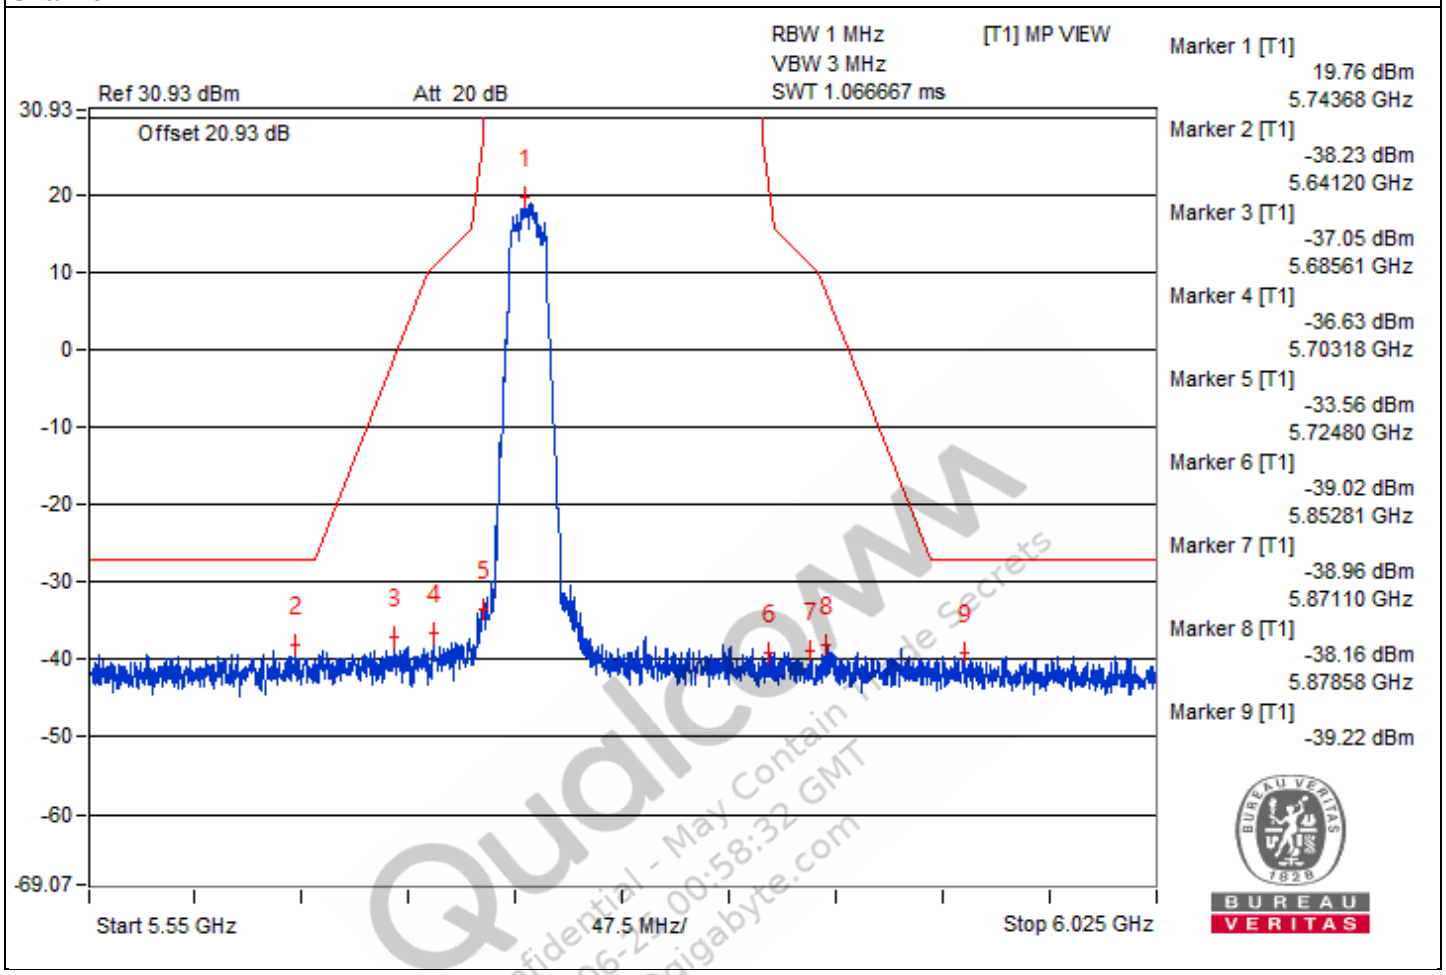

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

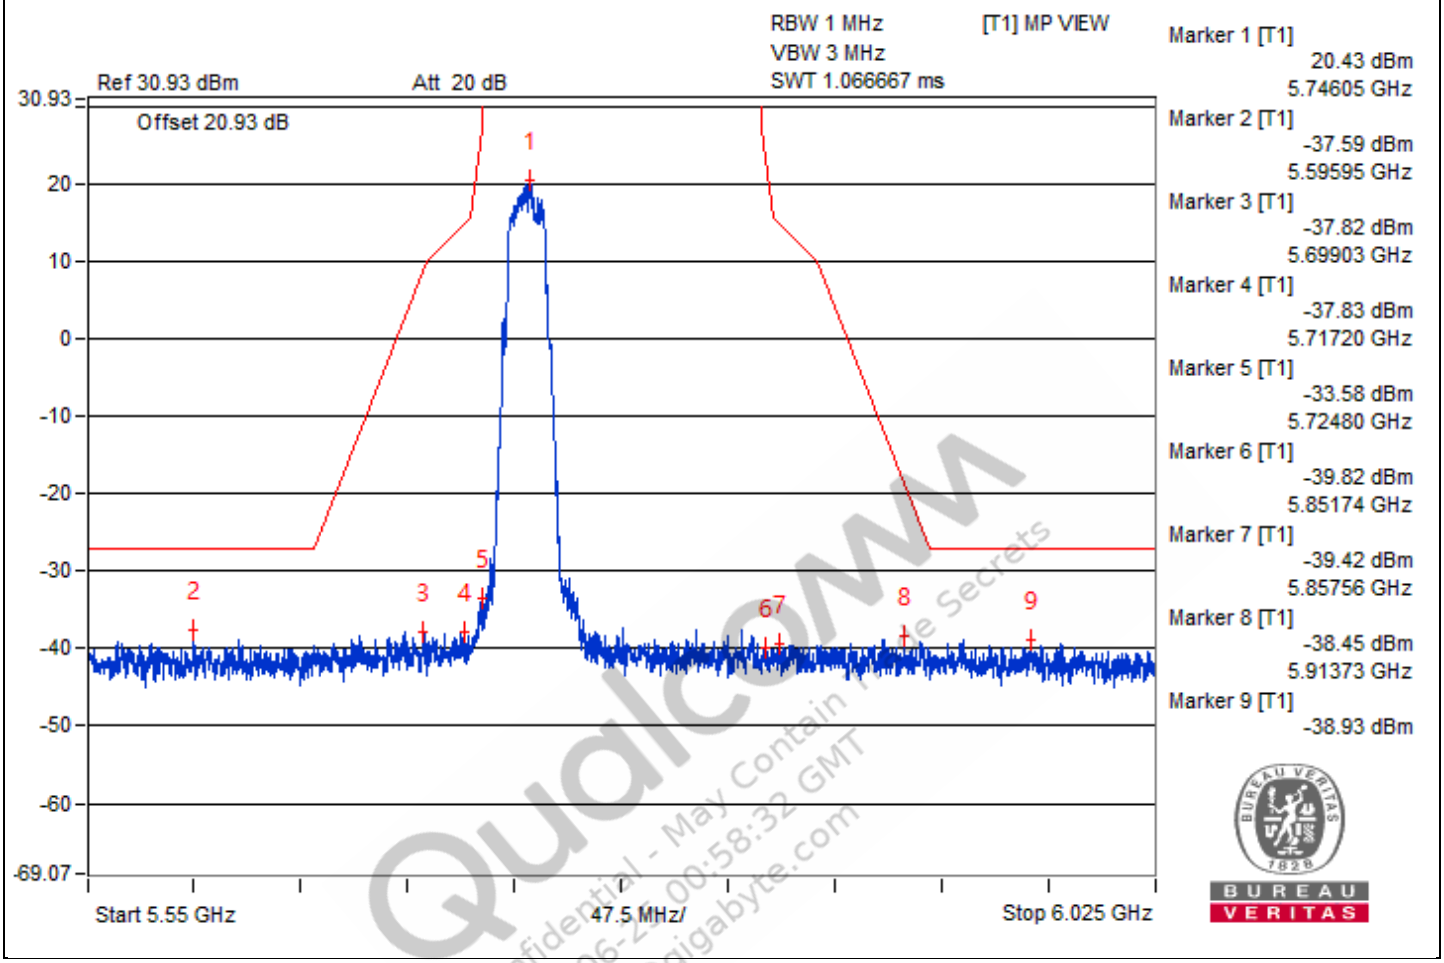

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11a – Channel 157

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3860.93	60.67 PK	74	-13.33	-47.17	-44.72	8.17	-34.59
2	3837.5	49.93 AV	54	-4.07	-56.23	-56.82	8.17	-45.33
3	7723.43	58.65 PK	74	-15.35	-47.4	-48.23	8.17	-36.61
4	7723.43	48.11 AV	54	-5.89	-58.15	-58.51	8.17	-47.15
5	11573.43	59.19 PK	74	-14.81	-47.59	-46.93	8.17	-36.07
6	11570.31	48.42 AV	54	-5.58	-58.19	-57.86	8.17	-46.84
7	#17355.37	49.61 PK	68.2	-18.59	-56.49	-57.2	8.17	-45.65


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

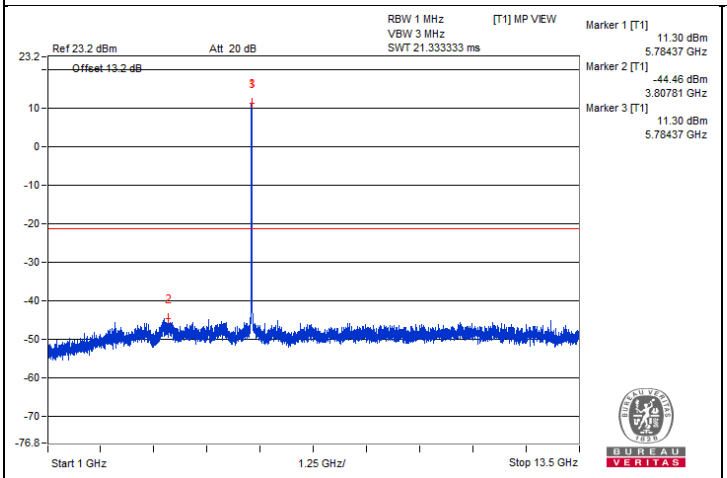


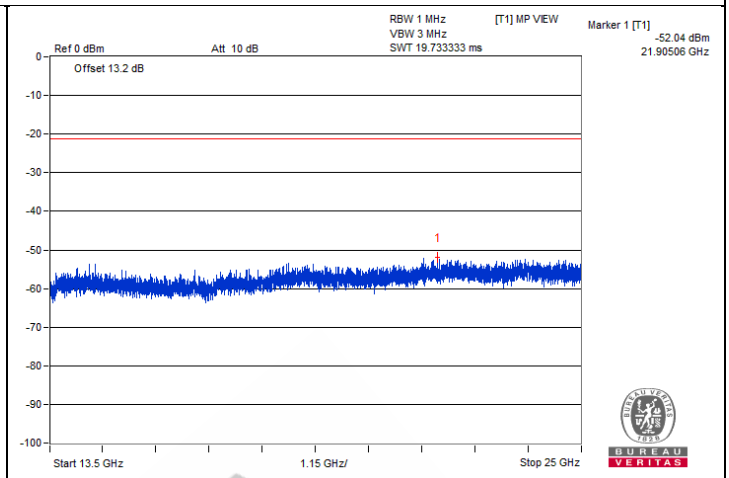

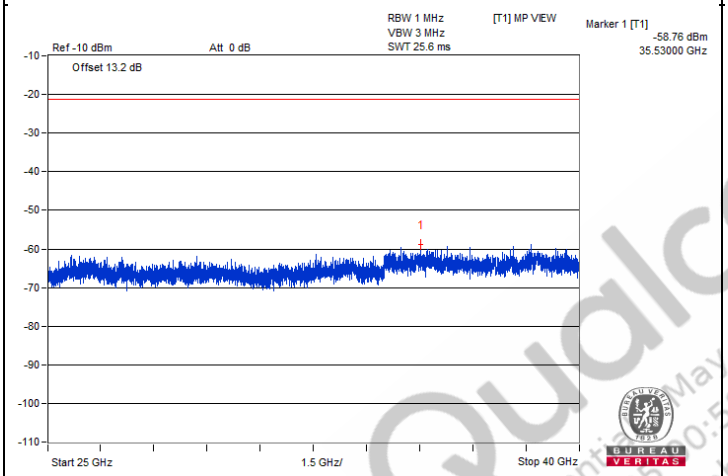

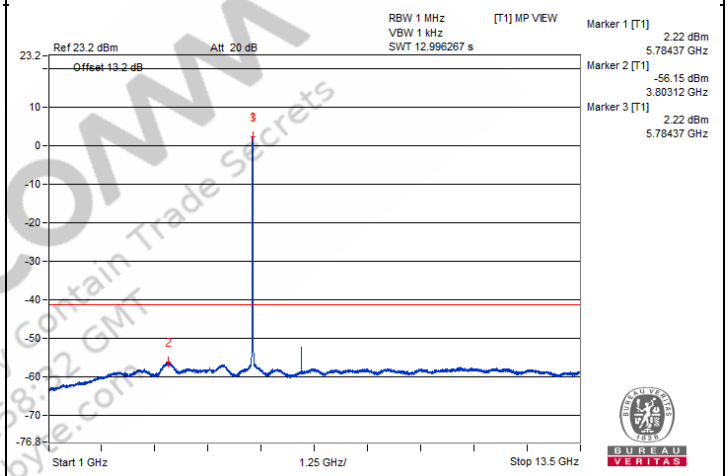


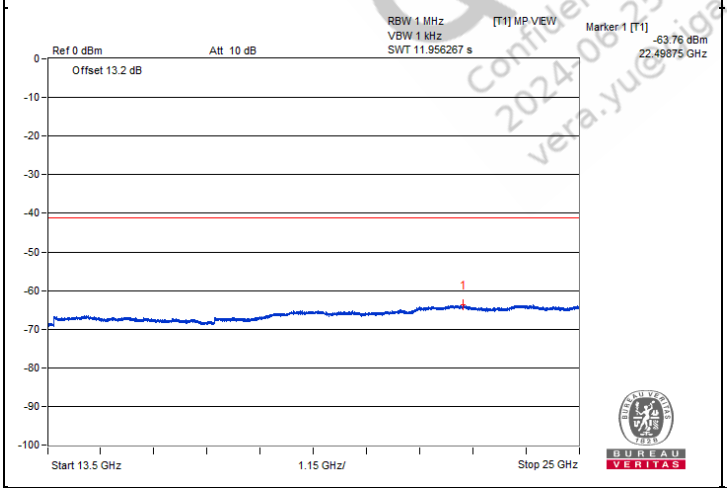


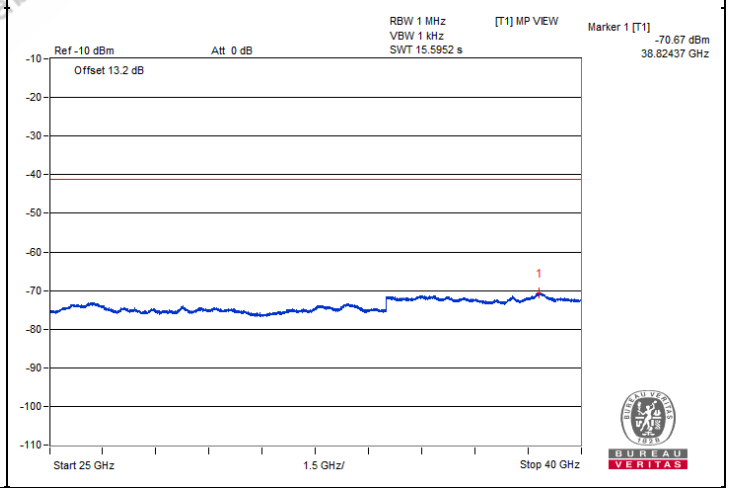



QualcOMM
Confidential – May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

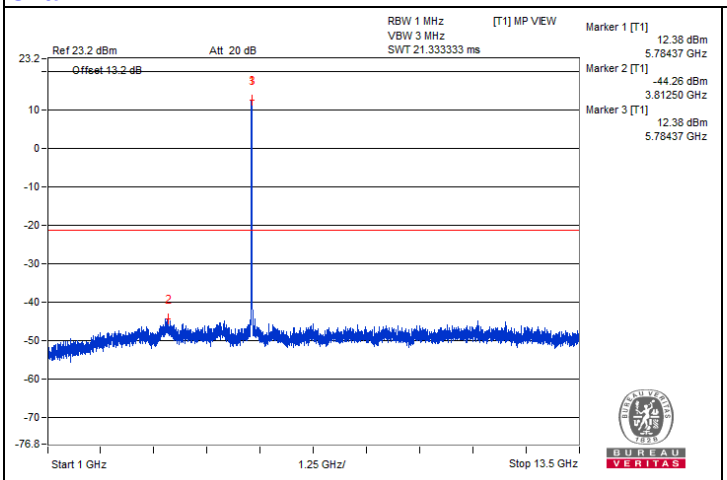


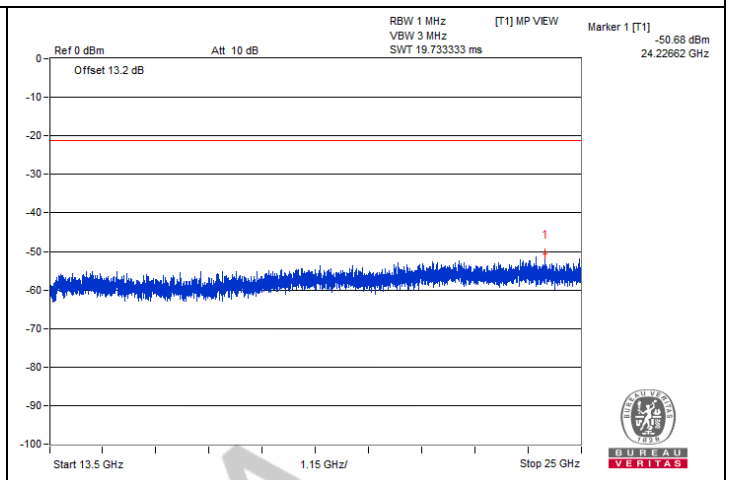

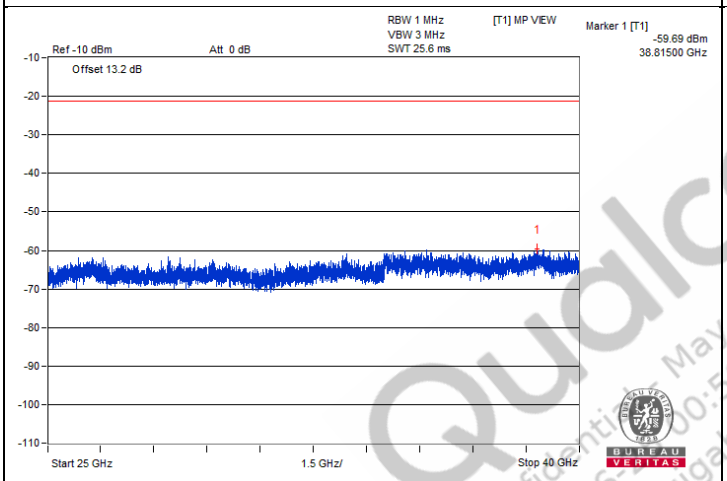

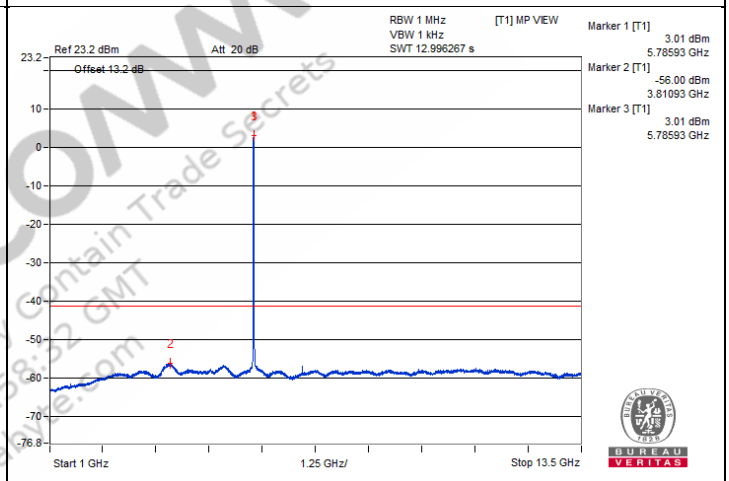

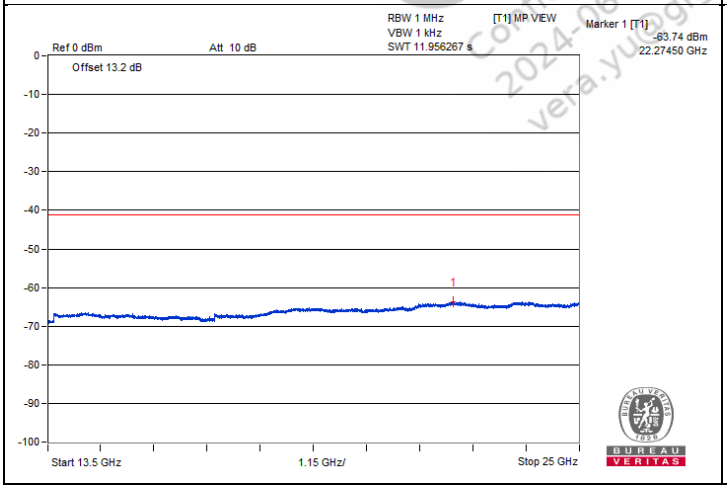


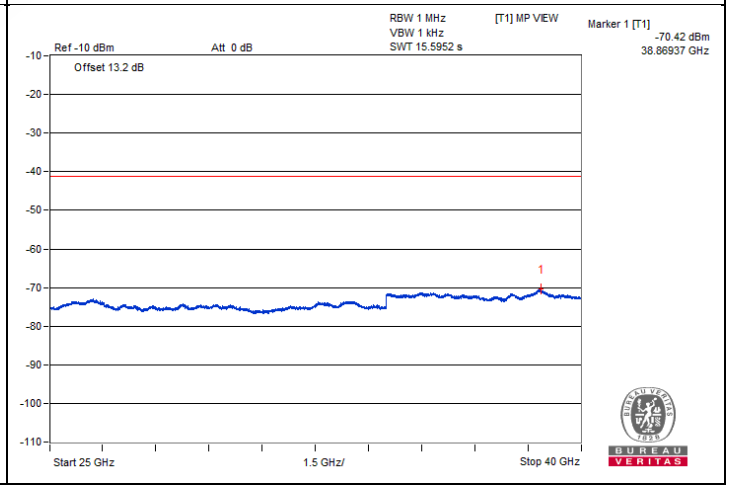

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

Chain 0

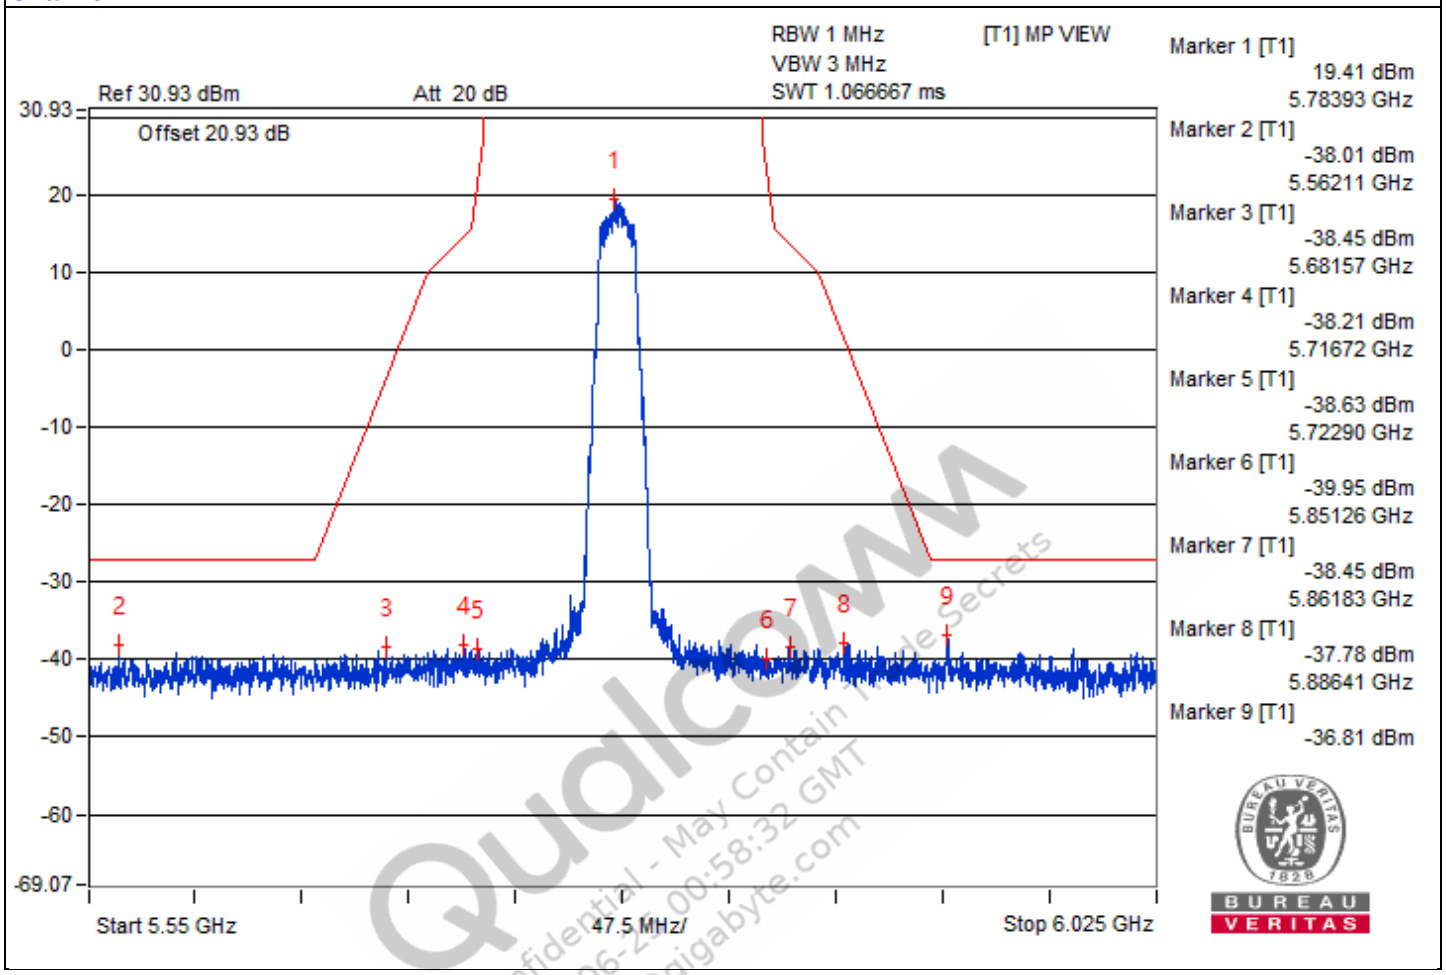

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

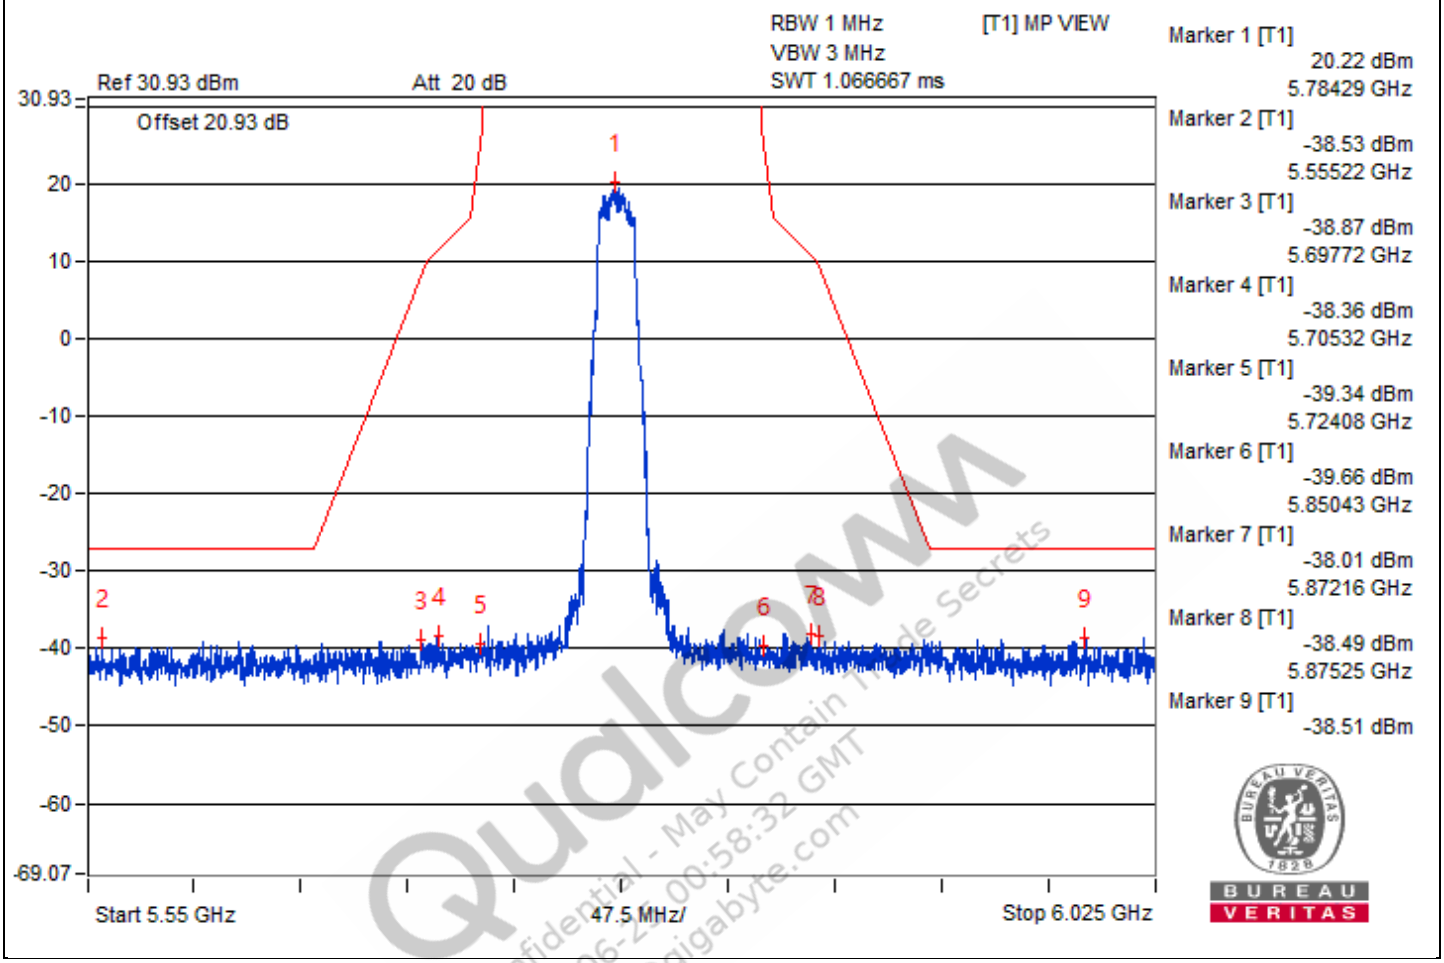

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11a – Channel 165

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3879.68	61.35 PK	74	-12.65	-46.22	-44.2	8.17	-33.91
2	3876.56	49.75 AV	54	-4.25	-56.79	-56.6	8.17	-45.51
3	7750	58.77 PK	74	-15.23	-48.29	-47.13	8.17	-36.49
4	11645.31	60.16 PK	74	-13.84	-46.35	-46.21	8.17	-35.10
5	11660.93	48.36 AV	54	-5.64	-58.04	-58.12	8.17	-46.90
6	#17487.62	49.37 PK	68.2	-18.83	-56	-58.49	8.17	-45.89


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

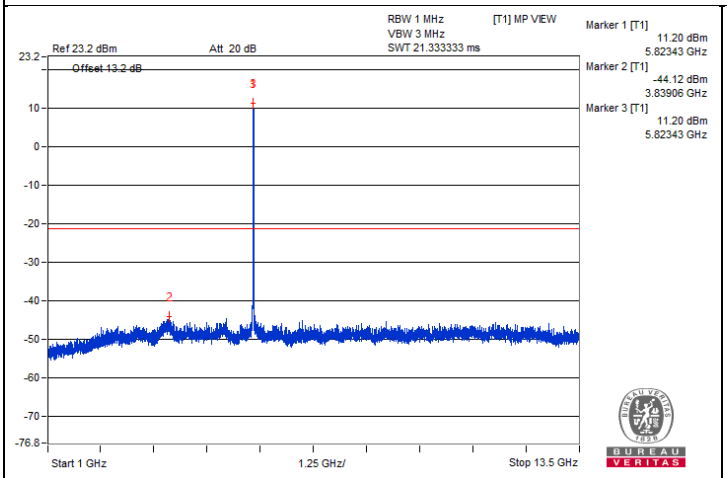


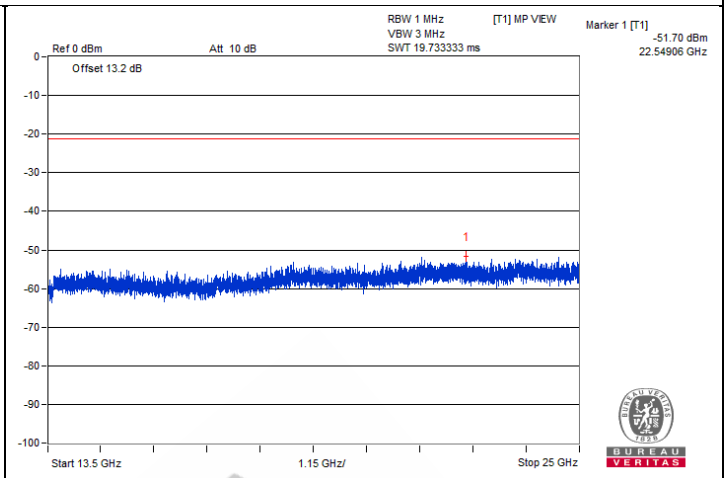

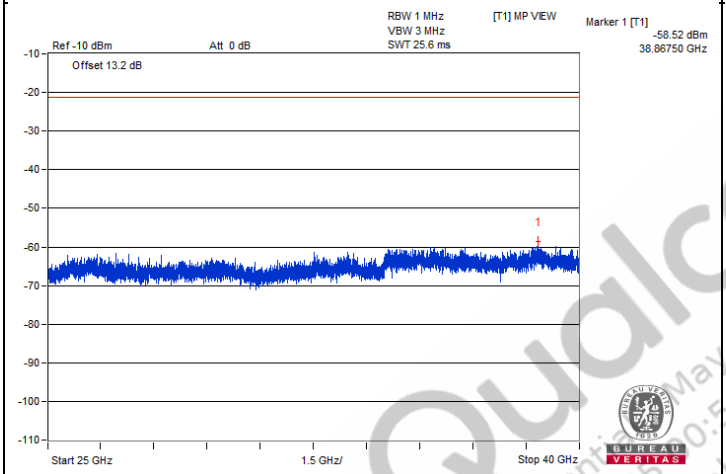

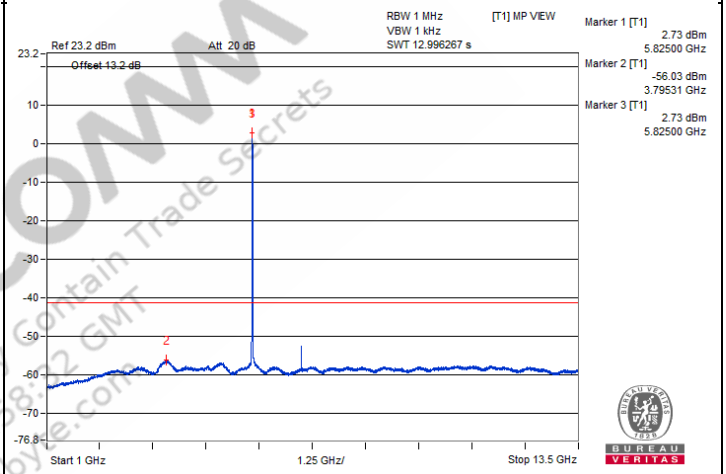


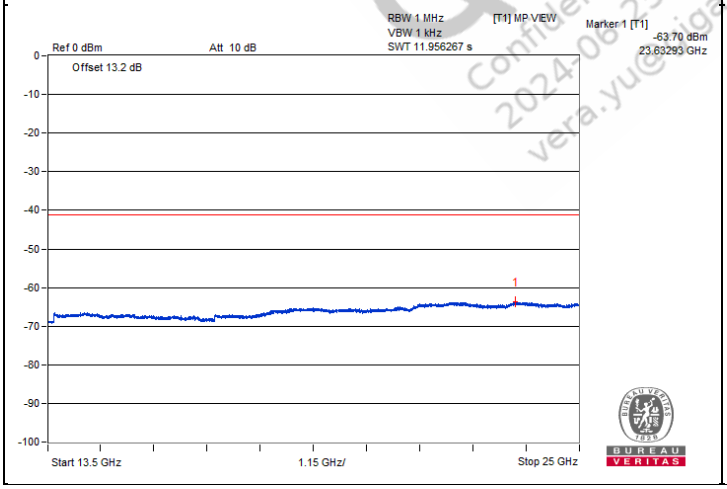


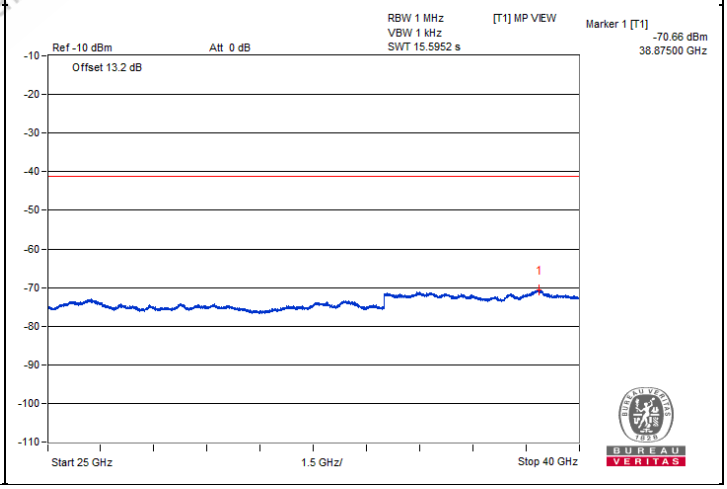



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

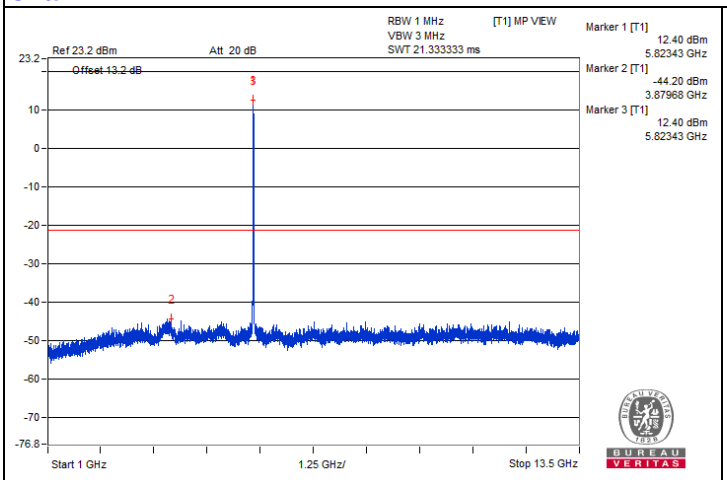


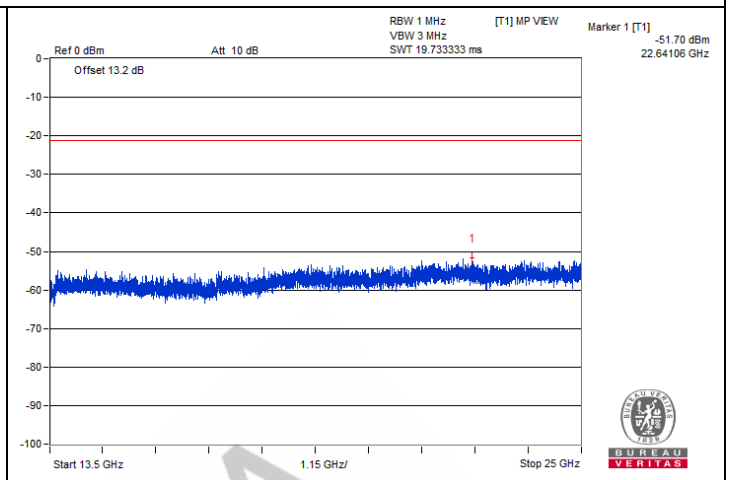

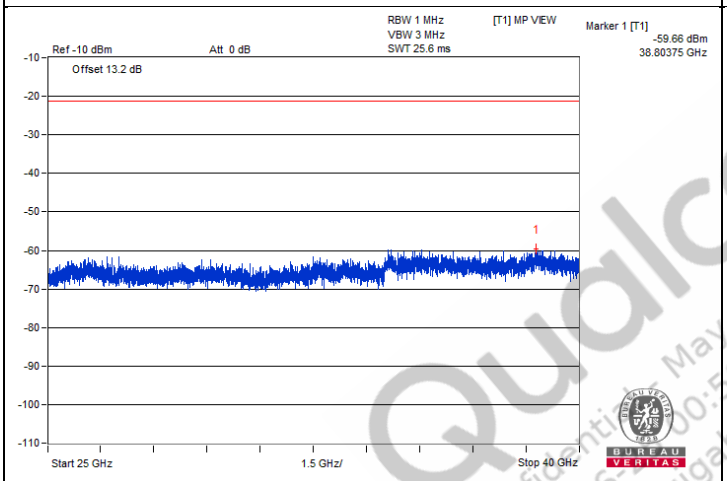

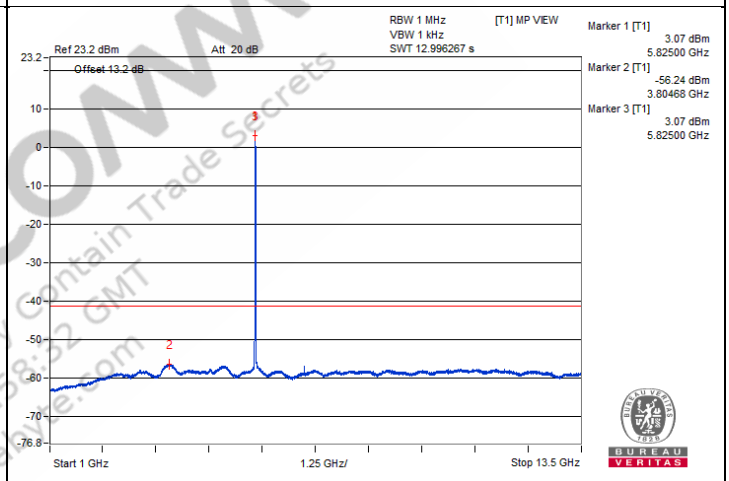

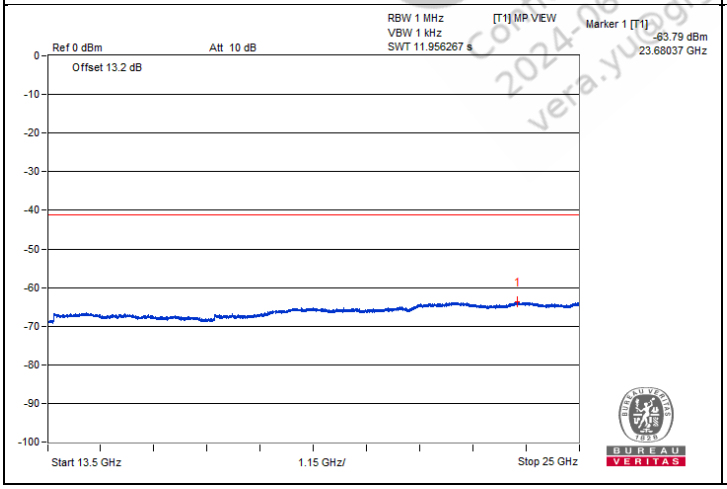


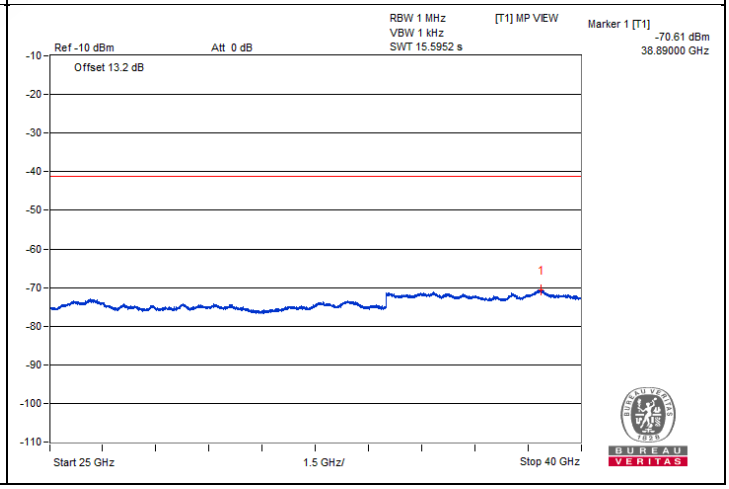

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gqatvre.com


Bandedge table

Chain 0

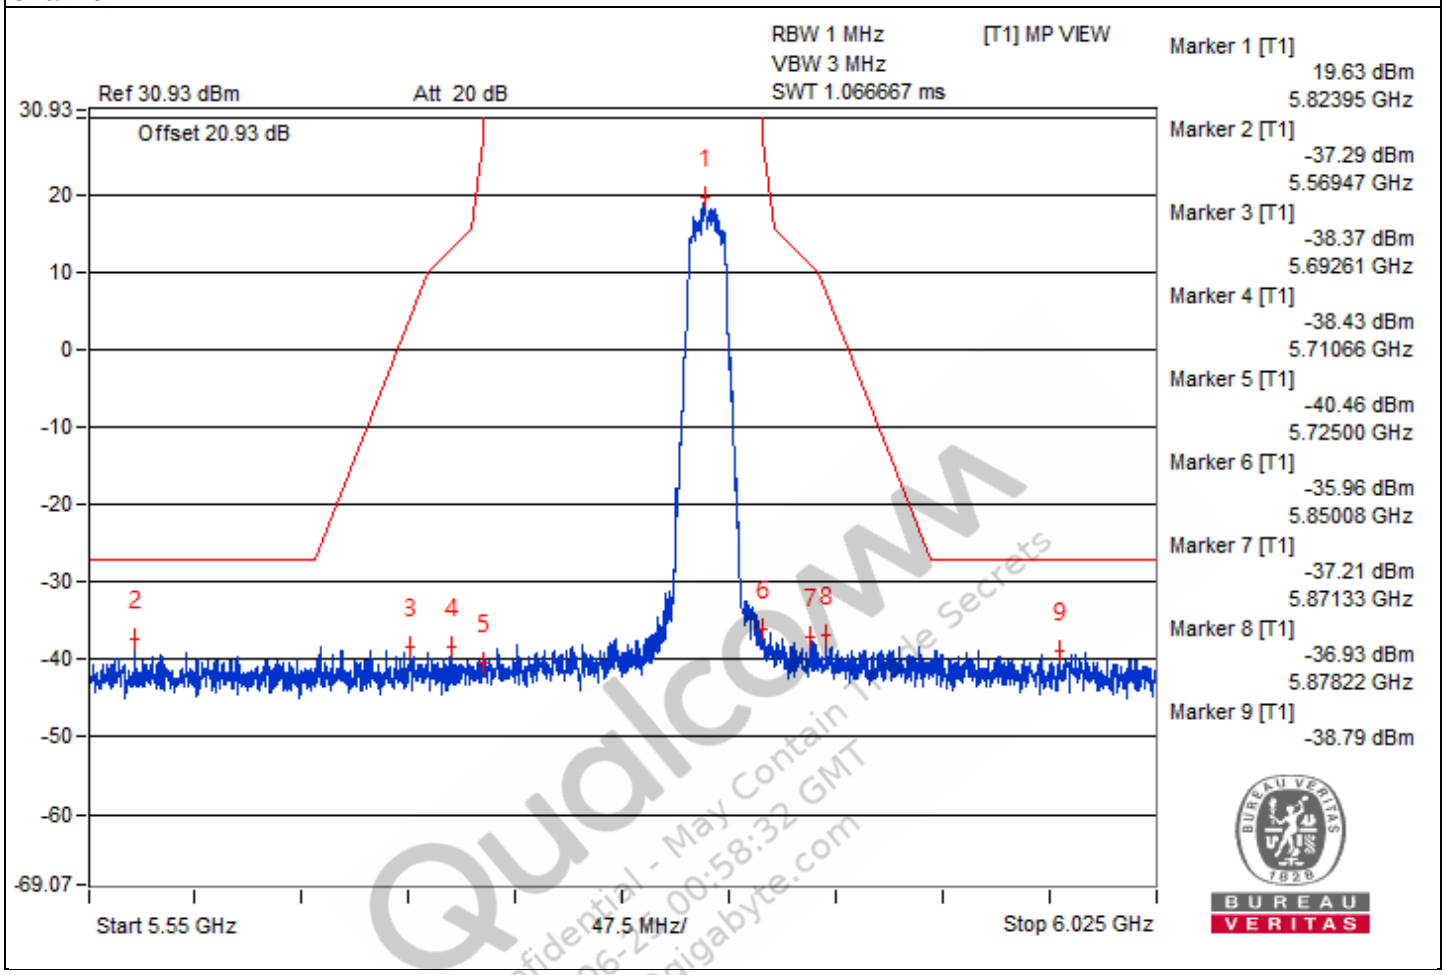

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

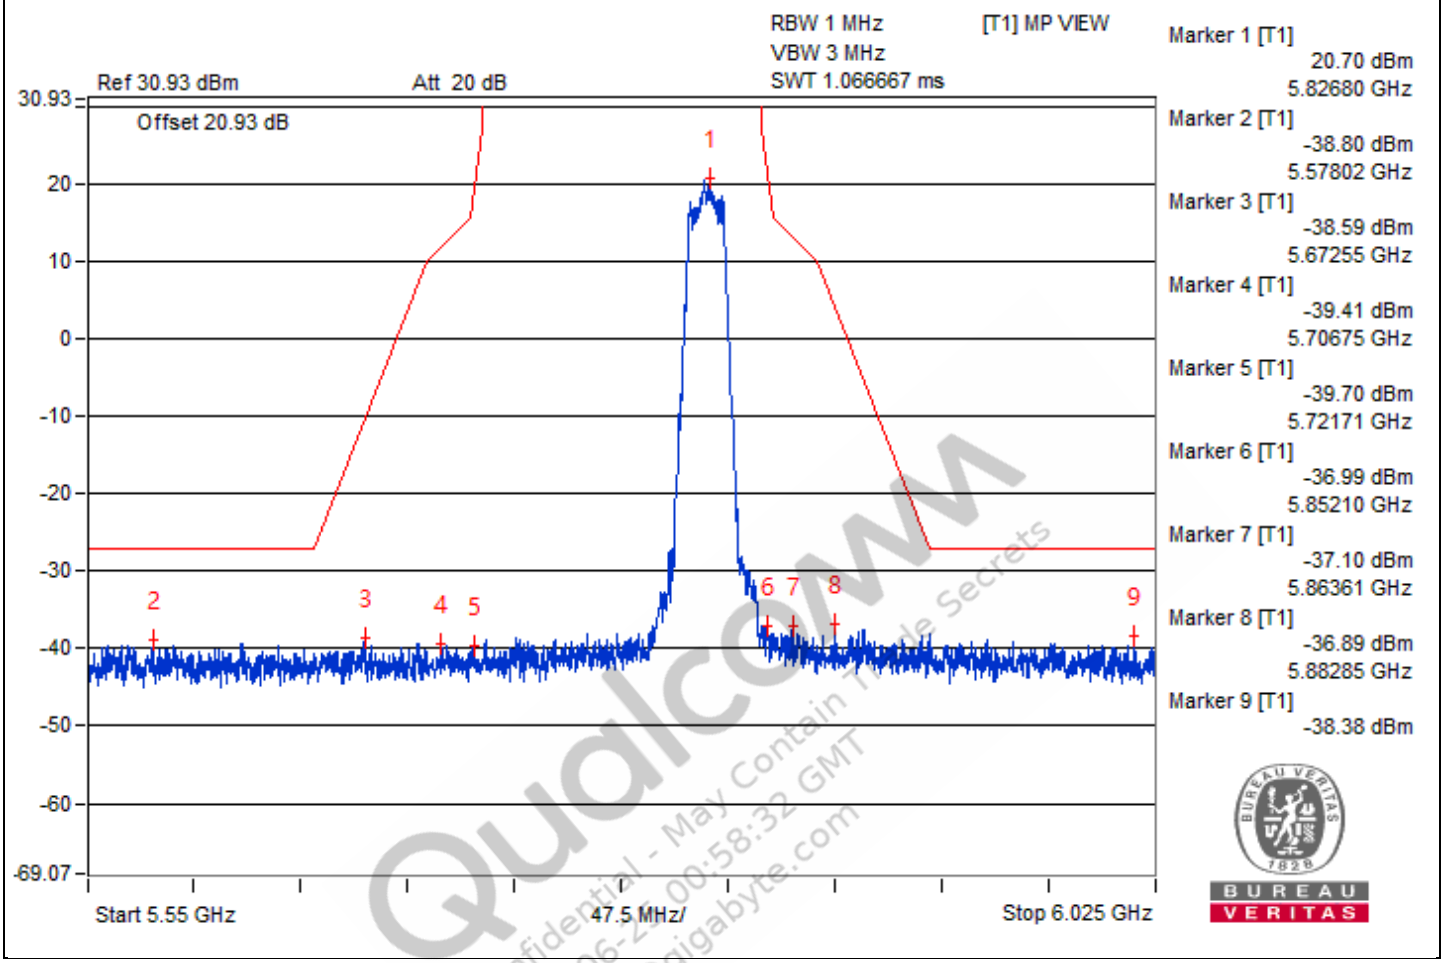

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT20) - Channel 36

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3471.87	57.73 PK	68.2	-10.47	-49.27	-48.21	8.17	-37.53
2	#6890.62	58.67 PK	68.2	-9.53	-49.24	-46.68	8.17	-36.59
3	#10348.43	60.41 PK	68.2	-7.79	-45.96	-46.1	8.17	-34.85
4	15555.62	48.87 PK	74	-25.13	-55.82	-60.54	8.17	-46.39
5	15547	39.17 AV	54	-14.83	-67.14	-67.41	8.17	-56.09


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

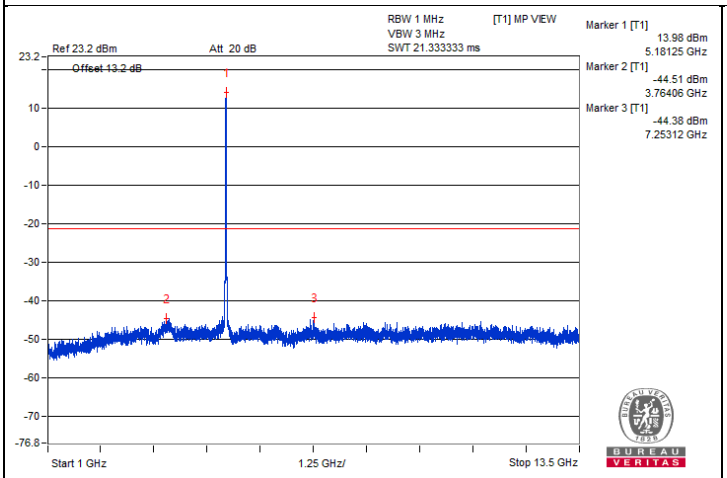


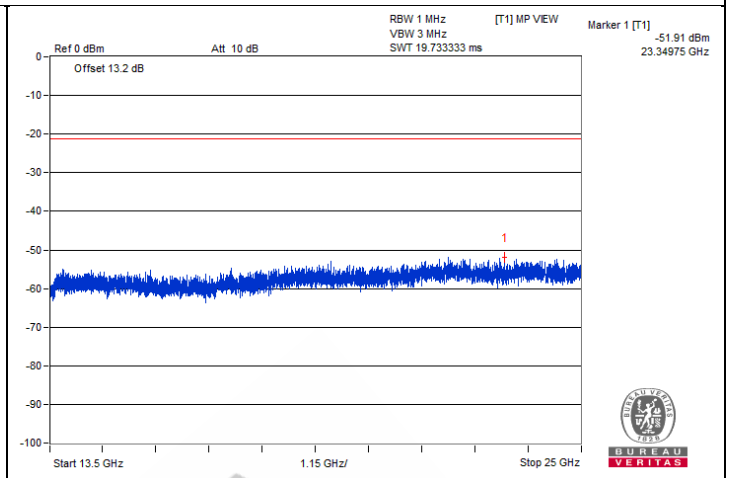

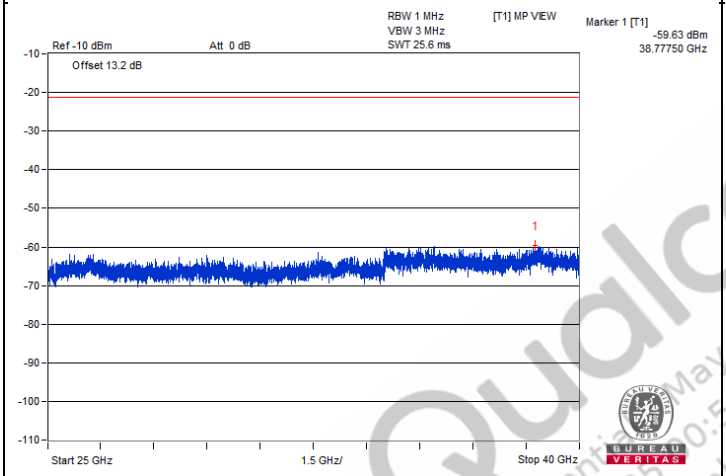

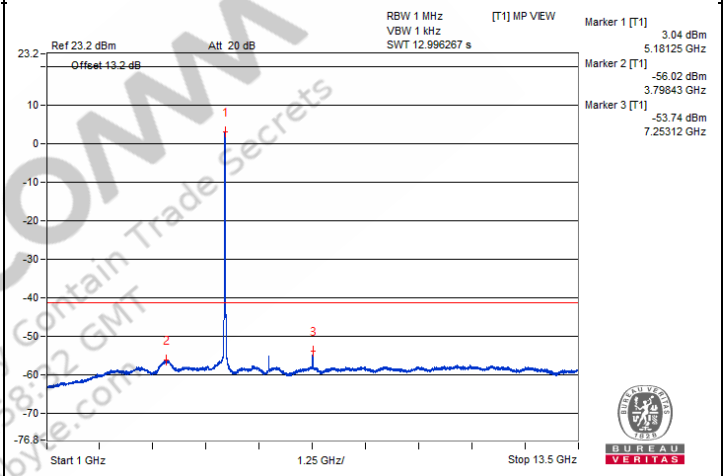


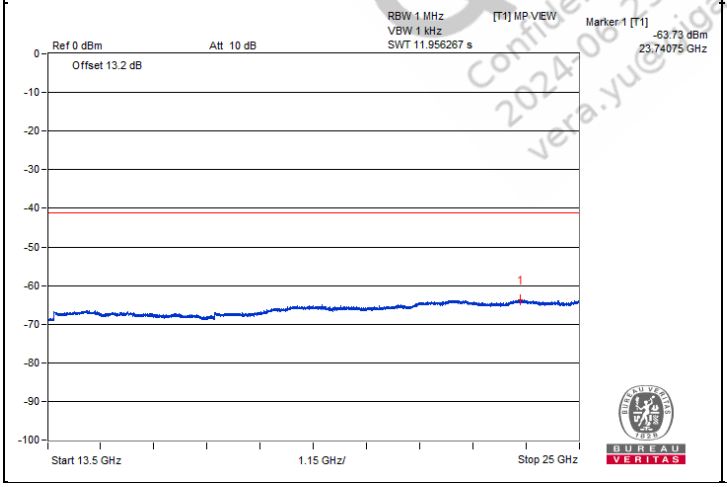


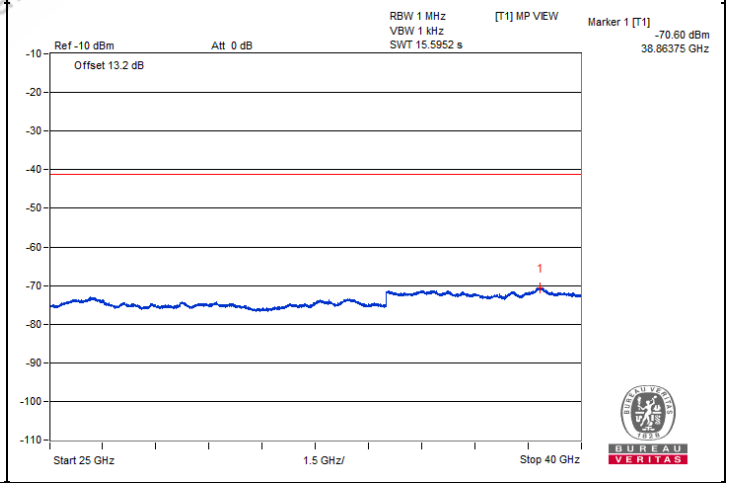



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

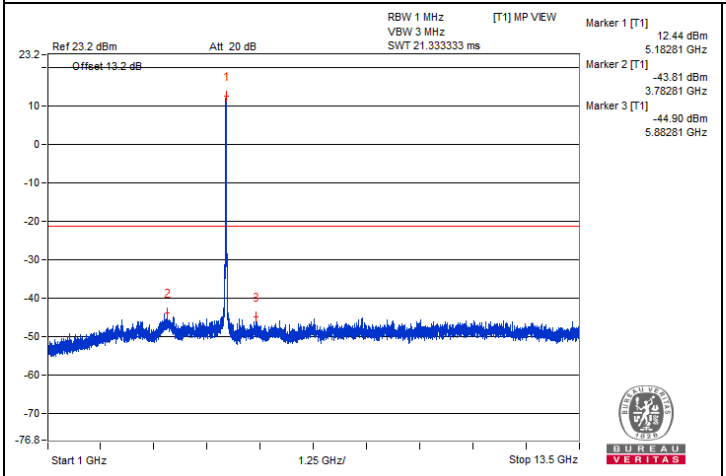


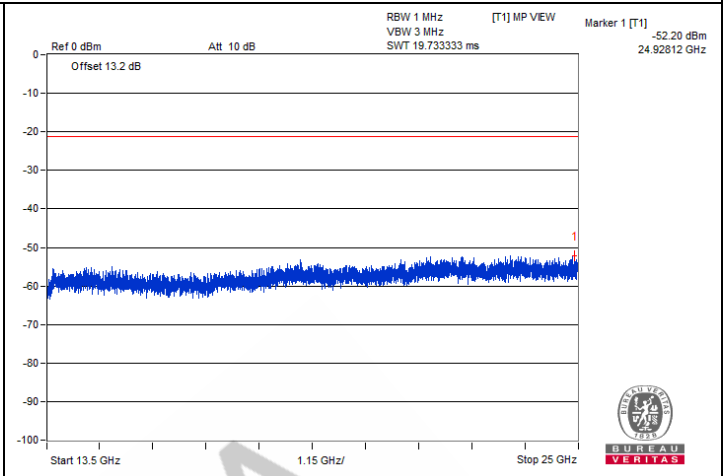

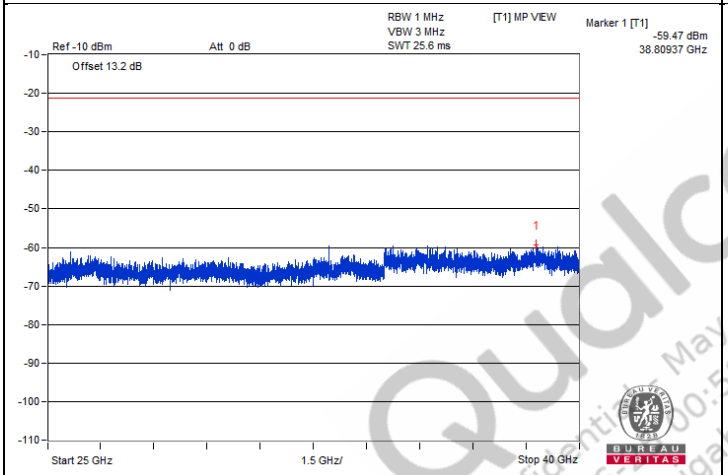

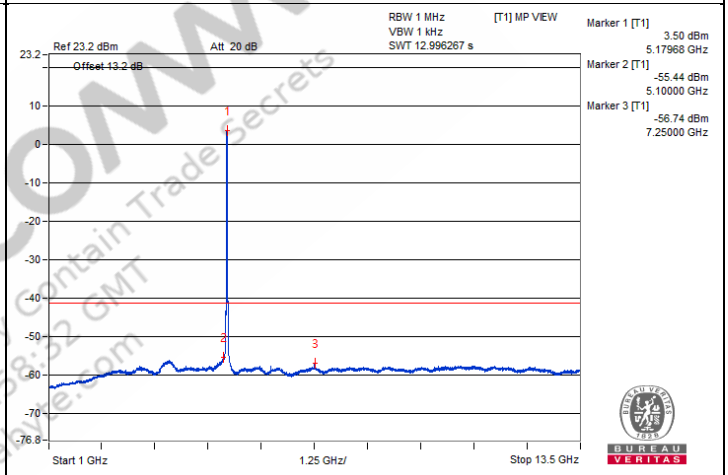

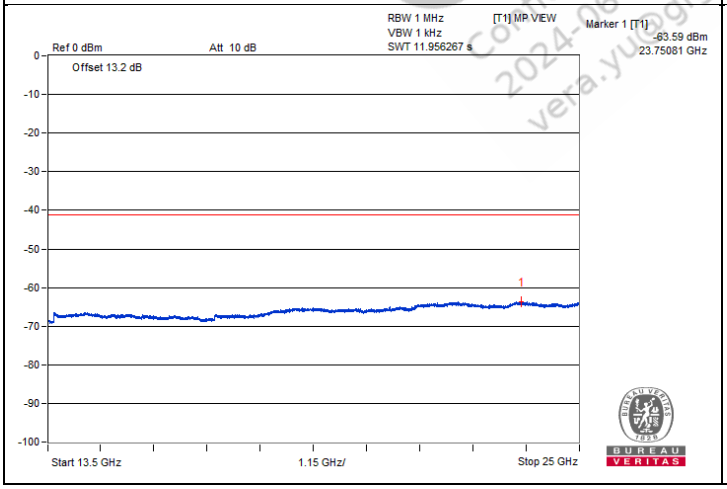

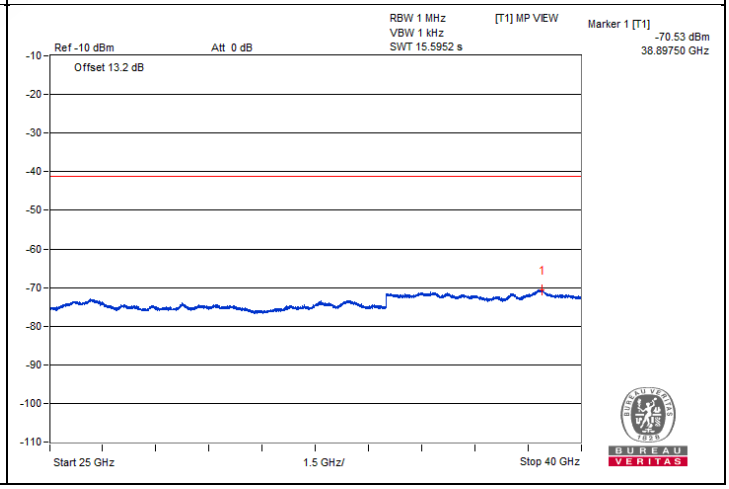

QualComm
Confidential Material Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@bgatve.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5148.8	64.23 PK	74	-9.77	-43.14	-38.74	6.36	-31.03
2	5150	52.07 AV	54	-1.93	-53.89	-51.55	6.36	-43.19

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

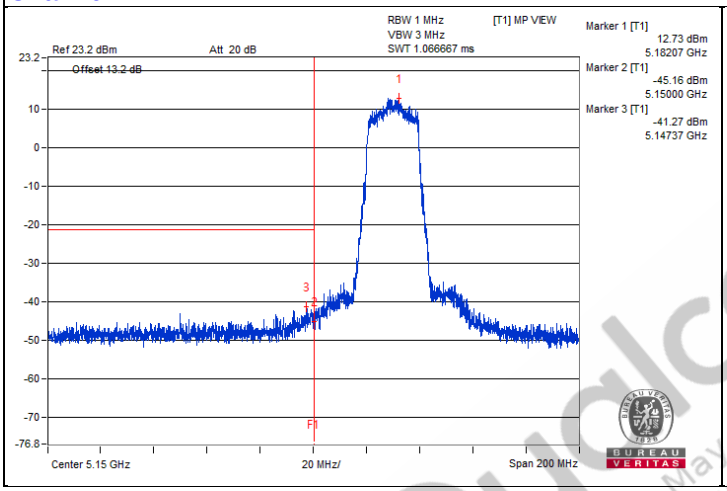

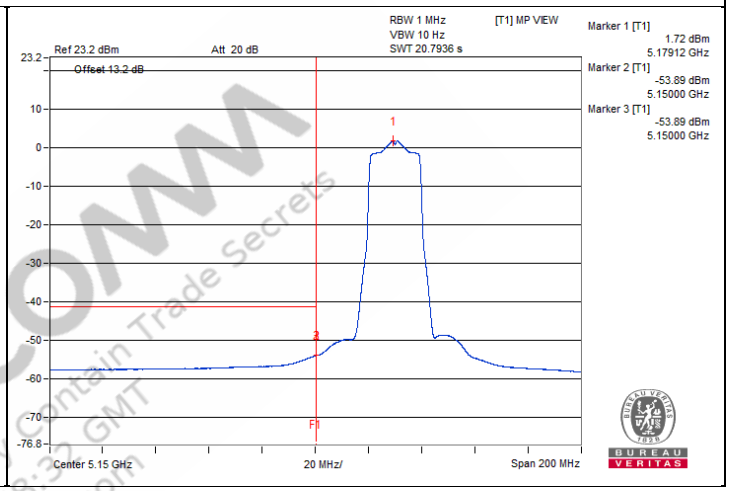

Chain 1

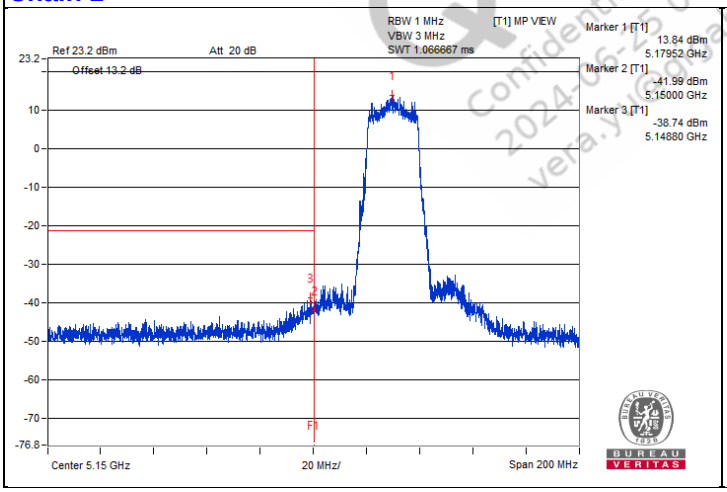

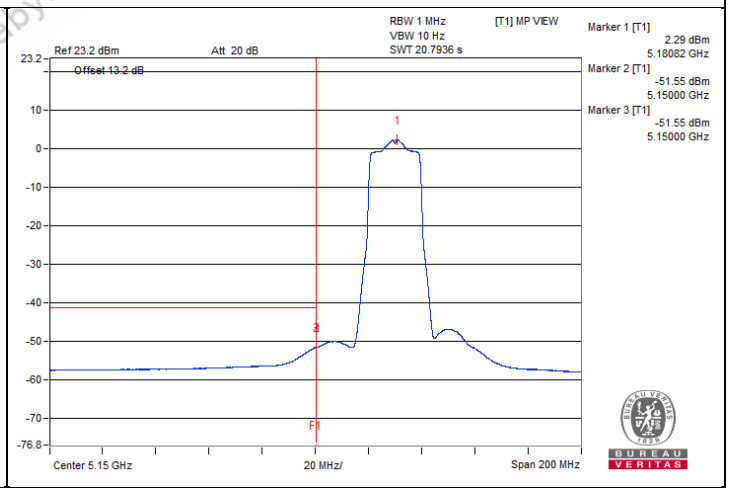

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@cyberbyte.com

802.11be (EHT20) - Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3479.68	57.69 PK	68.2	-10.51	-49.17	-48.36	8.17	-37.57
2	#6920.31	58.88 PK	68.2	-9.32	-46.56	-48.86	8.17	-36.38
3	#10407.81	59.14 PK	68.2	-9.06	-47.96	-46.73	8.17	-36.12
4	15607.37	47.95 PK	74	-26.05	-57.81	-59.3	8.17	-47.31
5	15611.68	39.3 AV	54	-14.7	-67.12	-67.16	8.17	-55.96


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

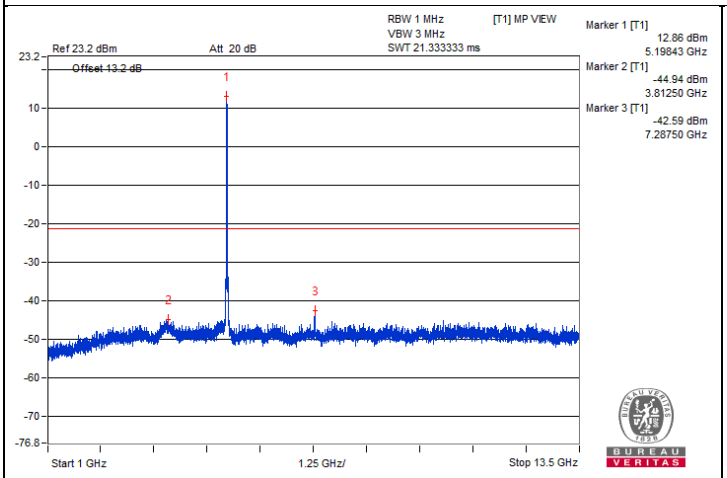


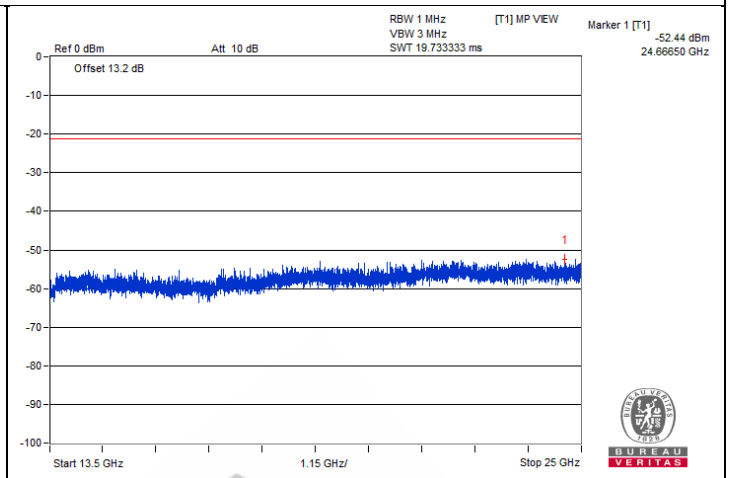

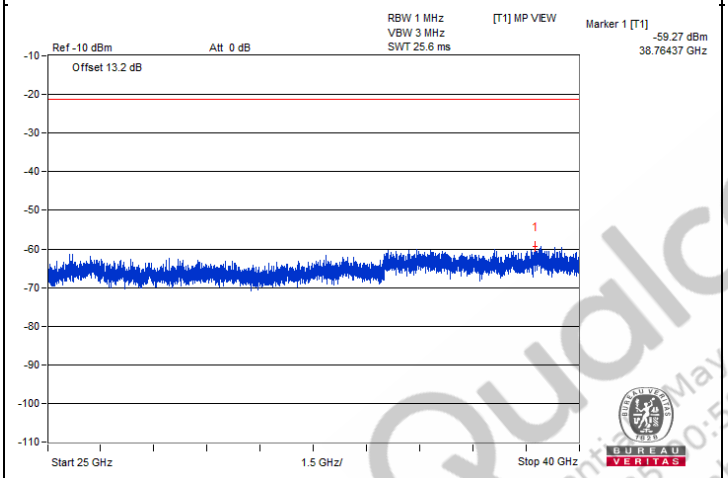

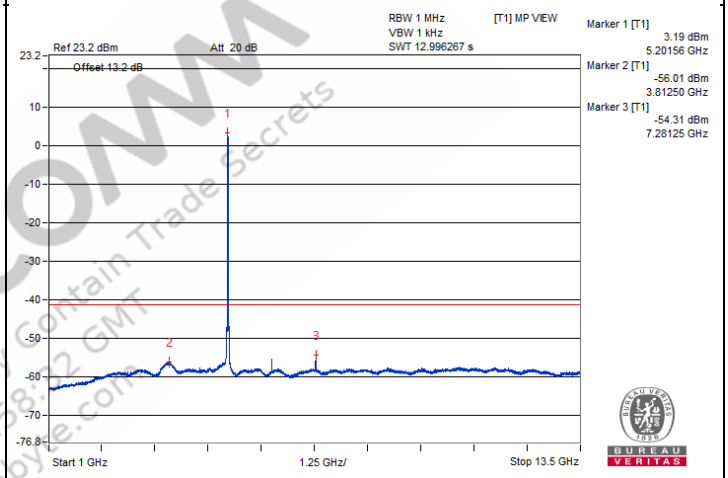


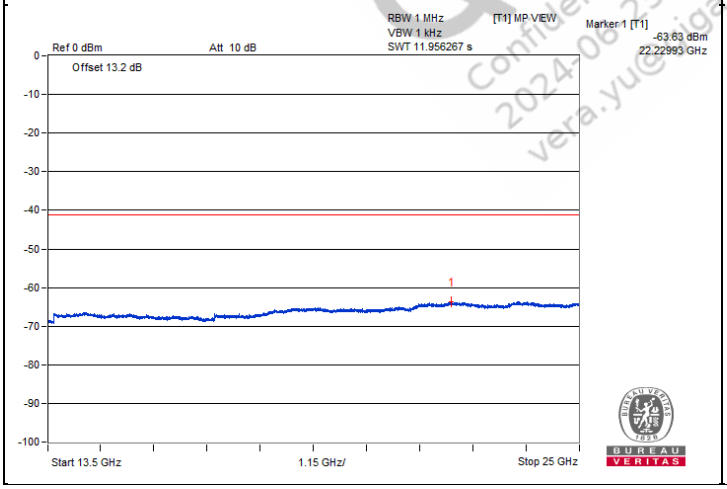


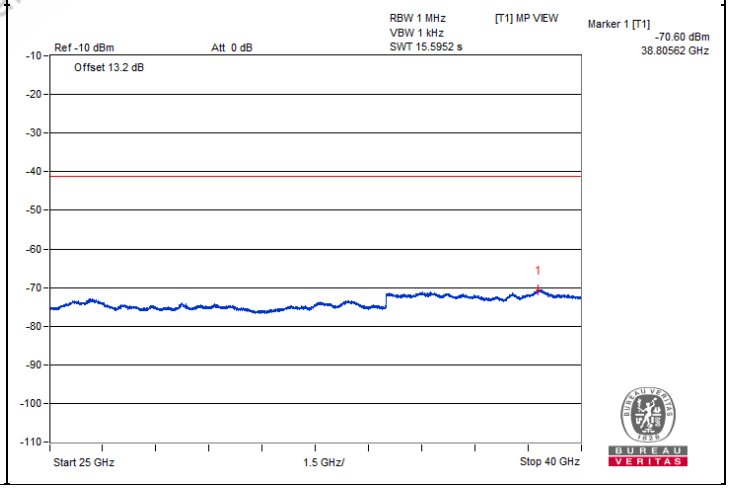



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

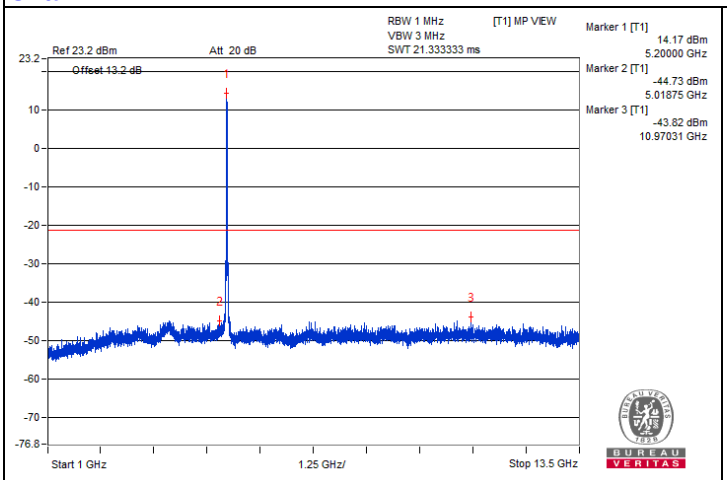


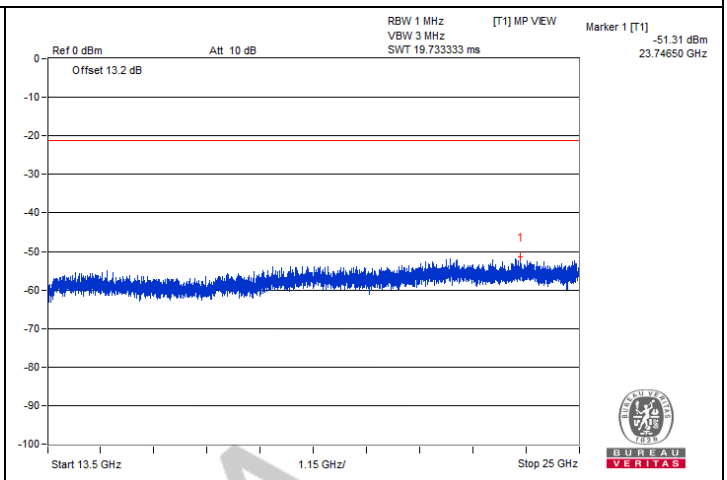

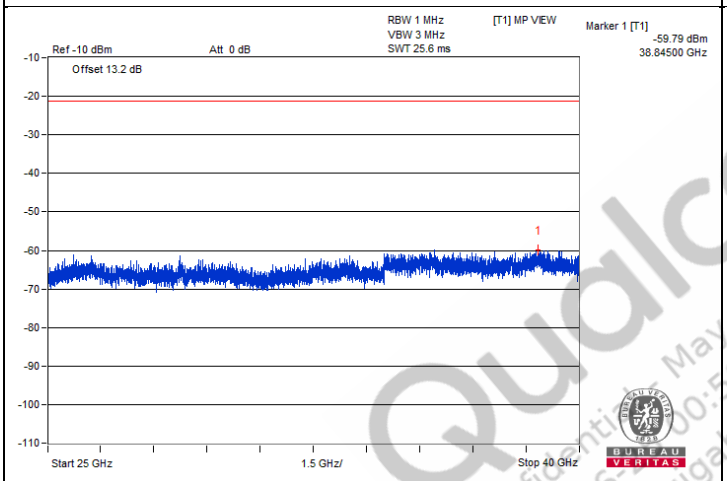

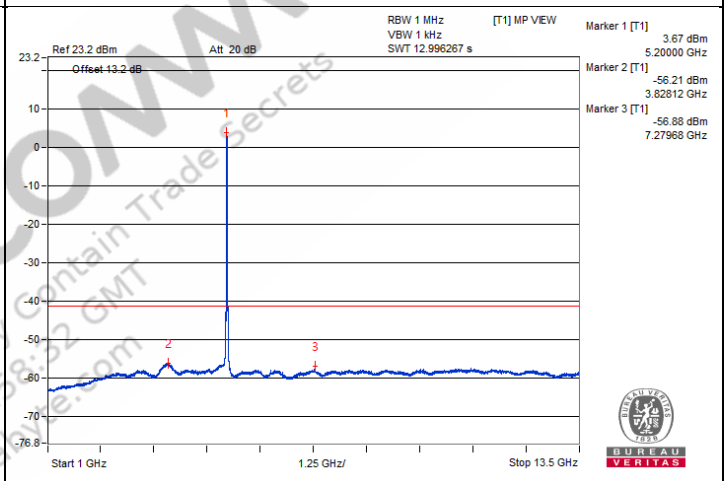

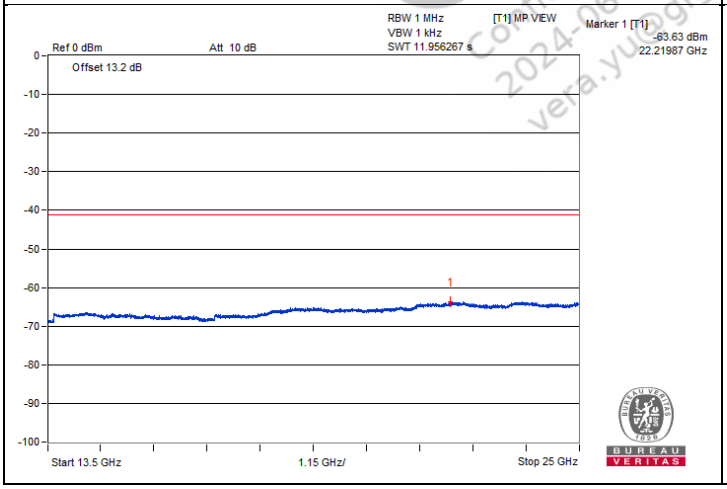

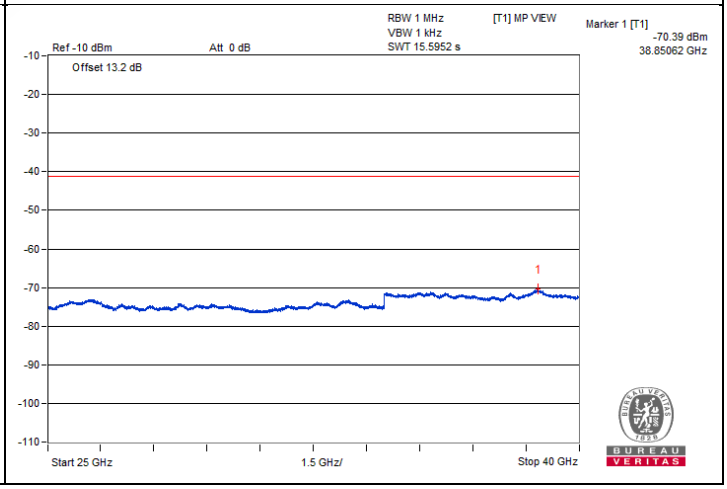

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5148.32	59.34 PK	74	-14.66	-47.03	-44.05	6.36	-35.92
2	5149.87	48.2 AV	54	-5.8	-56.7	-56.17	6.36	-47.06

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

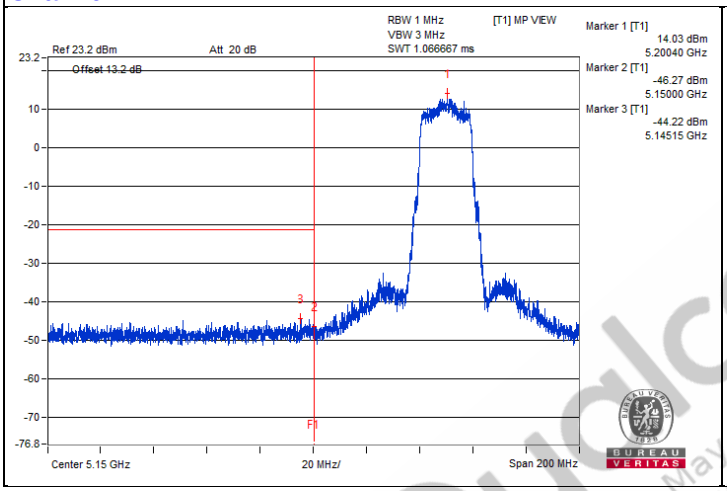

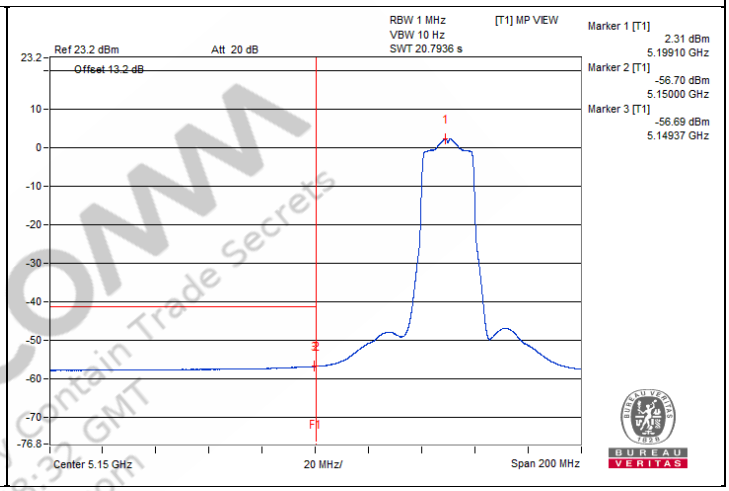

Chain 1

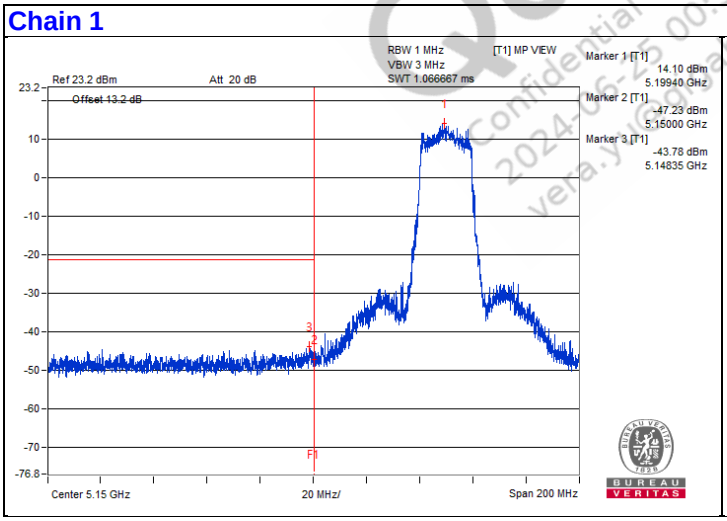

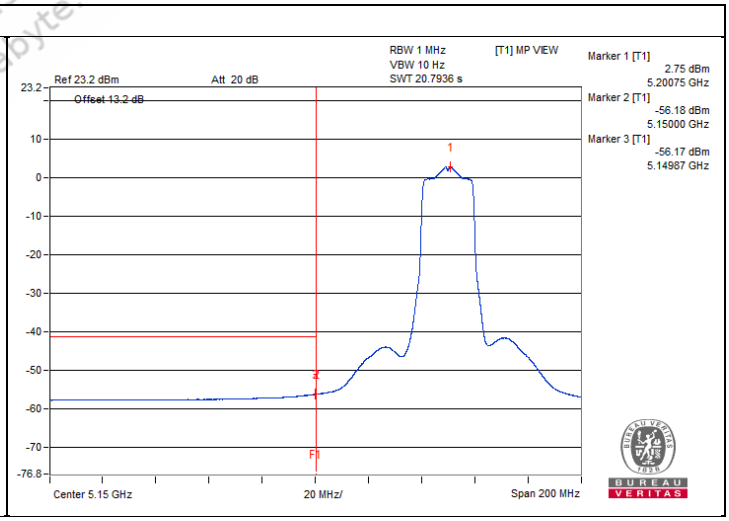

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.y.yu@cyberbyte.com

802.11be (EHT20) - Channel 48

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3501.56	57.51 PK	74	-16.49	-48.44	-49.49	8.17	-37.75
2	3500	47.07 AV	54	-6.93	-59.21	-59.53	8.17	-48.19
3	#7003.12	58.02 PK	68.2	-10.18	-47.45	-49.67	8.17	-37.24
4	#10490.62	58.96 PK	68.2	-9.24	-48.48	-46.66	8.17	-36.30
5	15710.87	49.85 PK	74	-24.15	-57.39	-55.92	8.17	-45.41
6	15715.18	39.08 AV	54	-14.92	-67.39	-67.33	8.17	-56.18


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

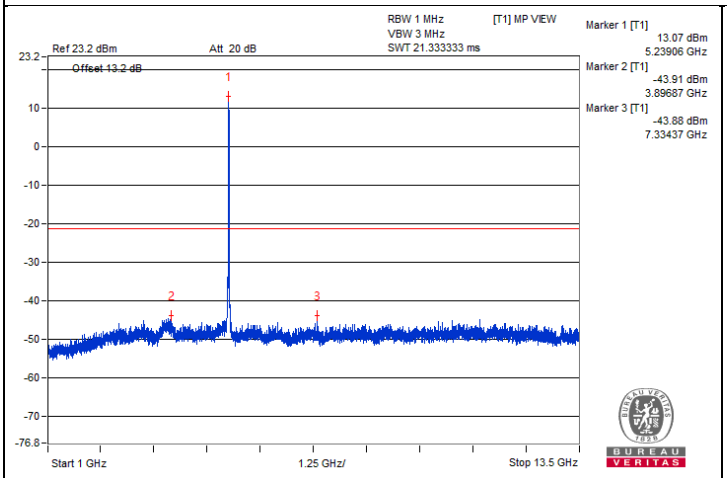


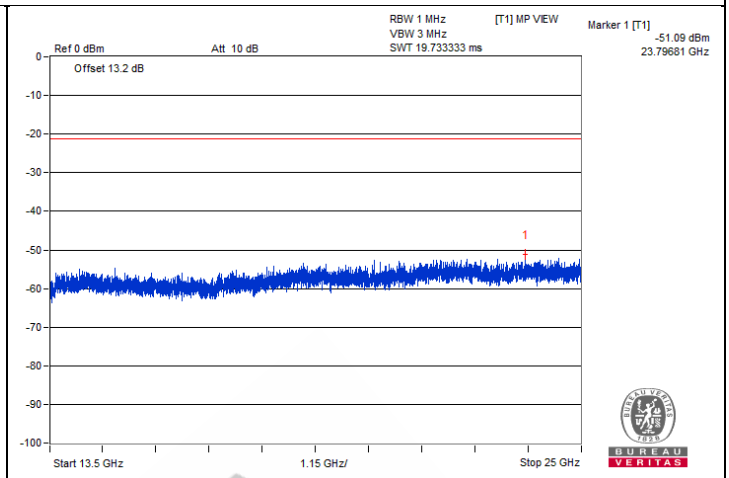

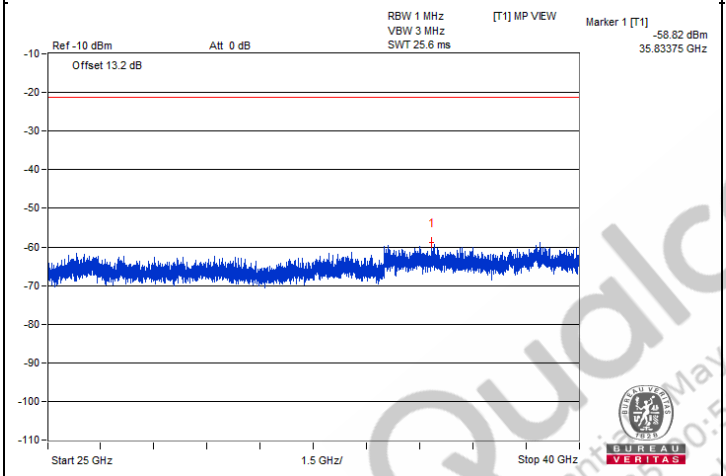

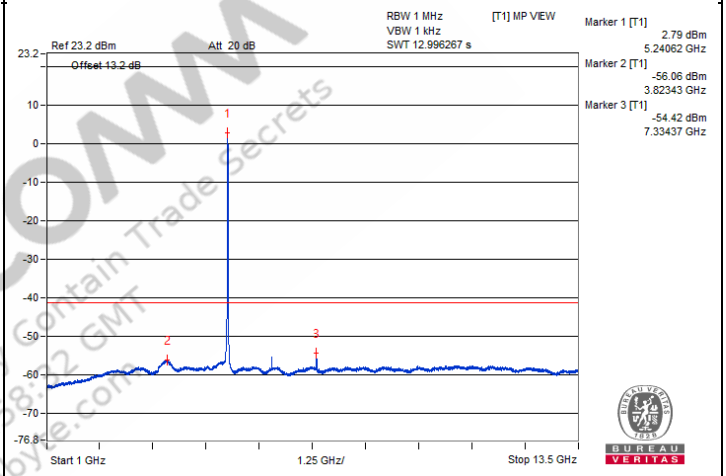


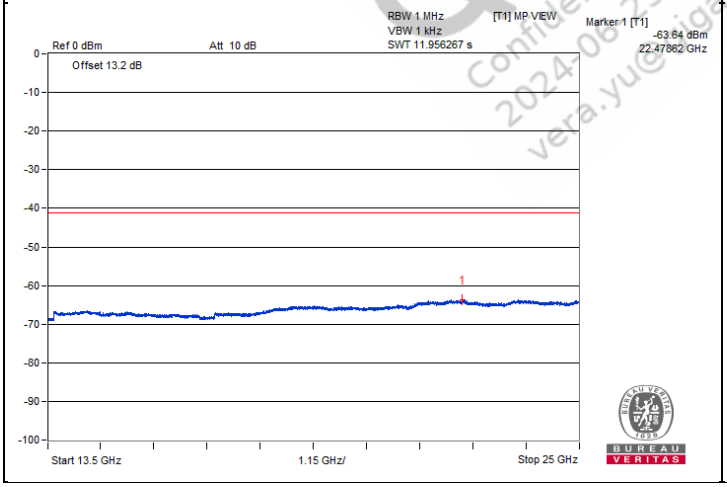


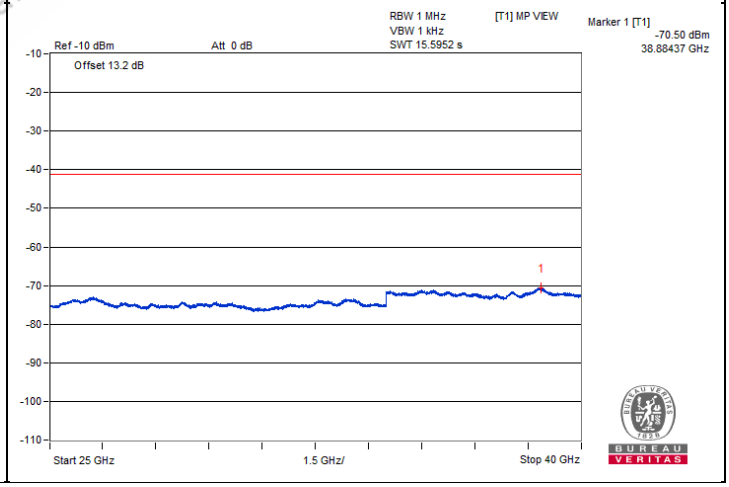



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

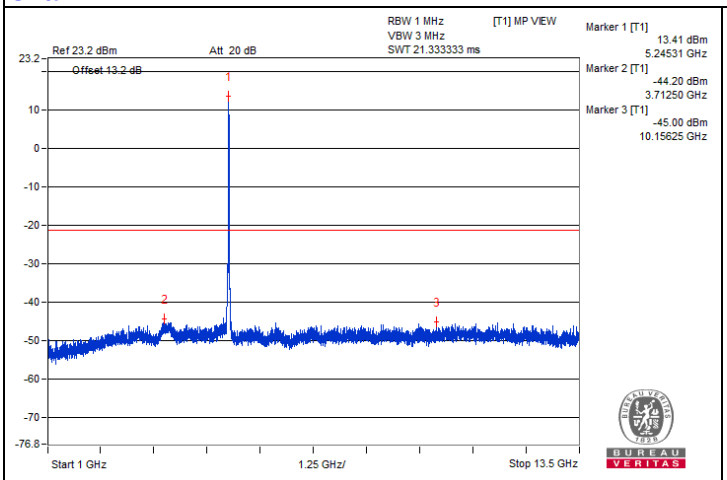


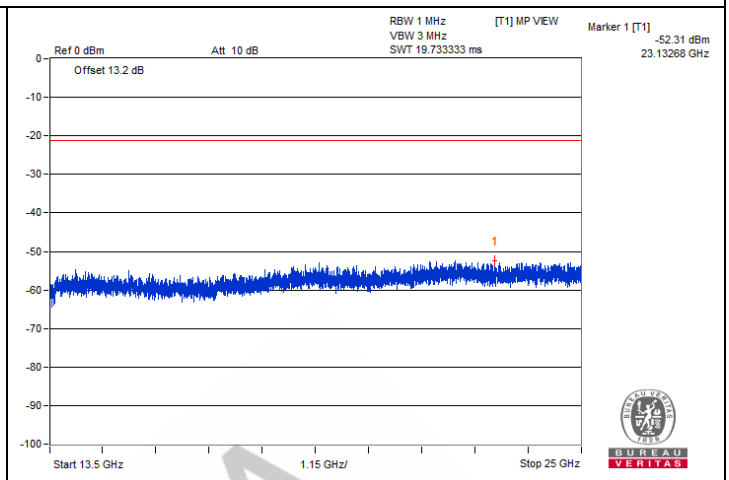

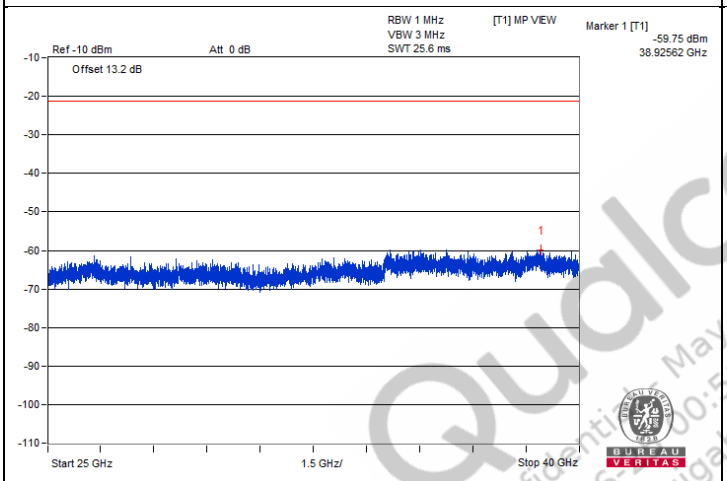

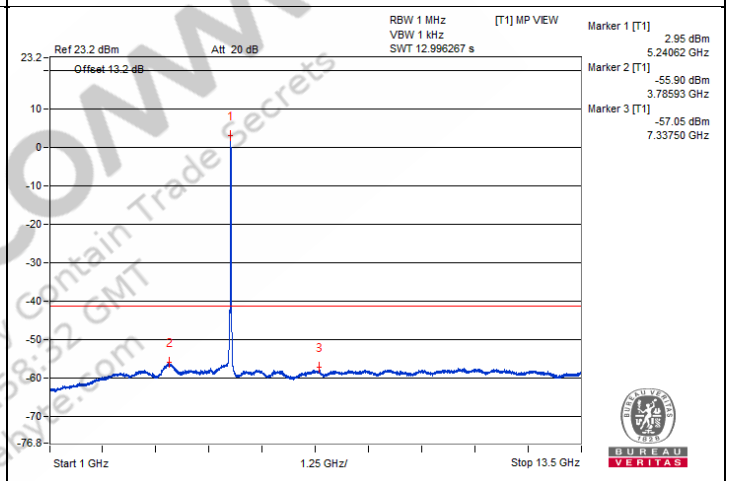

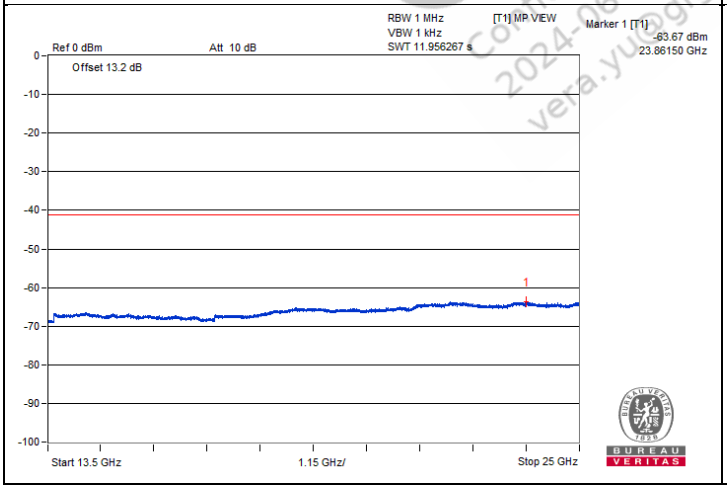

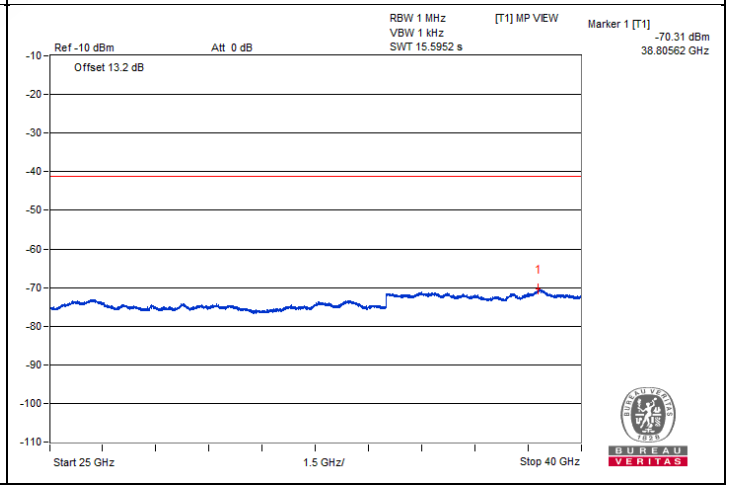

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qgatwire.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5099.42	58.75 PK	74	-15.25	-44.62	-47.67	6.36	-36.51
2	5143.07	47.07 AV	54	-6.93	-57.63	-57.5	6.36	-48.19

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

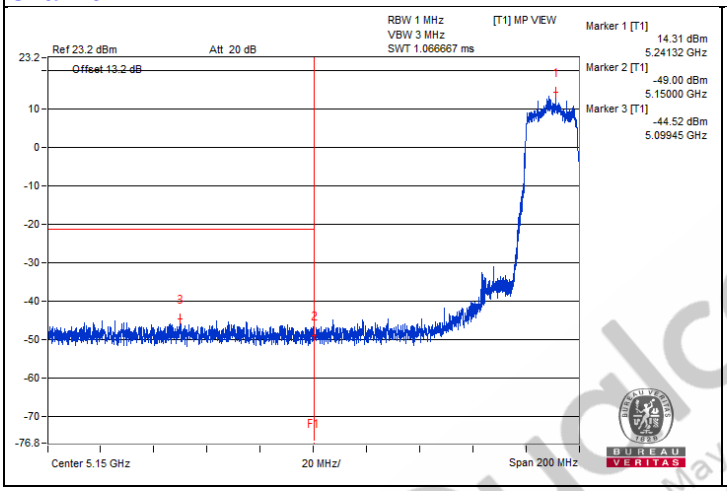

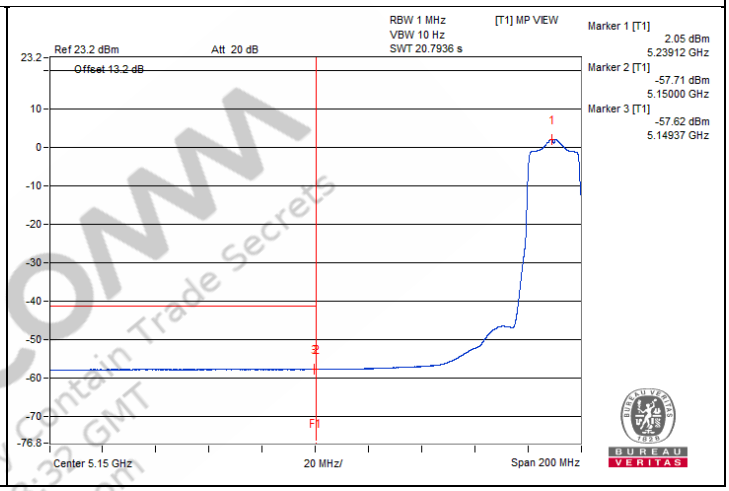

Chain 1

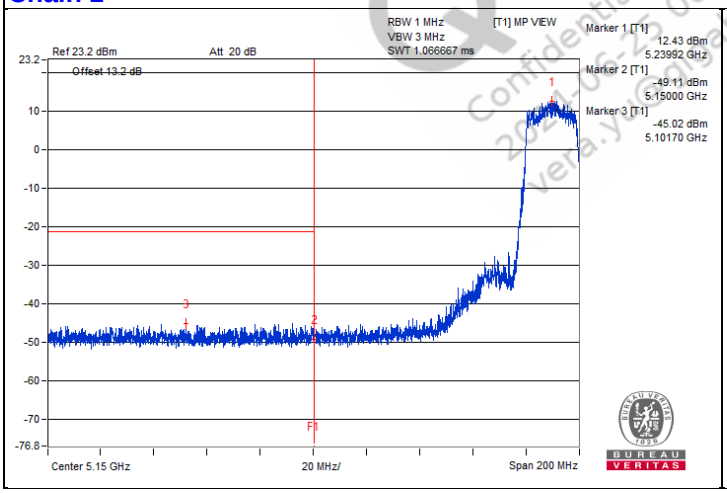

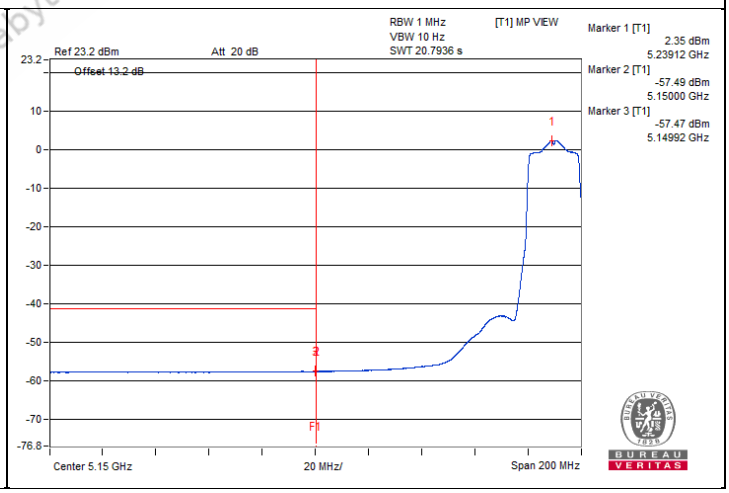

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@cnbyte.com

802.11be (EHT20) - Channel 52

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3512.5	58.54 PK	74	-15.46	-47.9	-47.91	8.17	-36.72
2	3512.5	47.12 AV	54	-6.88	-59.39	-59.25	8.17	-48.14
3	#7001.56	59.36 PK	68.2	-8.84	-47.62	-46.6	8.17	-35.90
4	#10501.56	59 PK	68.2	-9.2	-46.84	-48.14	8.17	-36.26
5	15787.06	47.98 PK	74	-26.02	-57.95	-59.05	8.17	-47.28
6	15779.87	38.94 AV	54	-15.06	-67.29	-67.73	8.17	-56.32


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

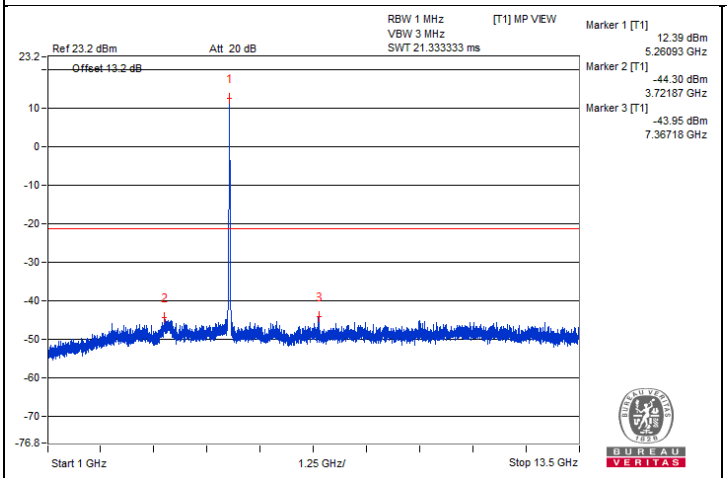


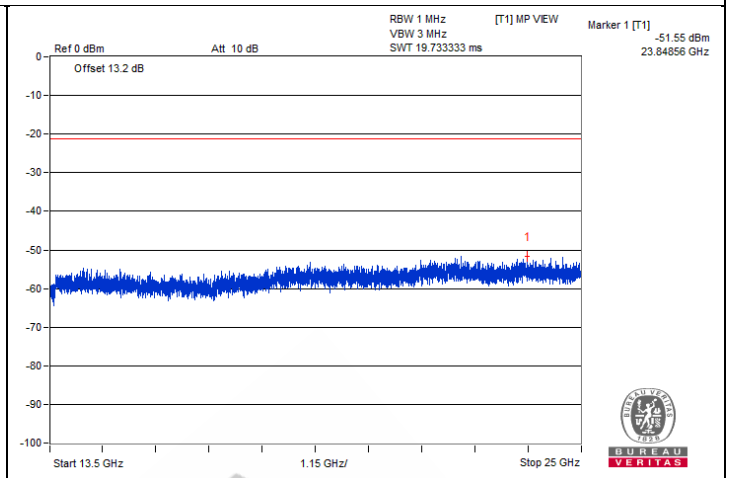

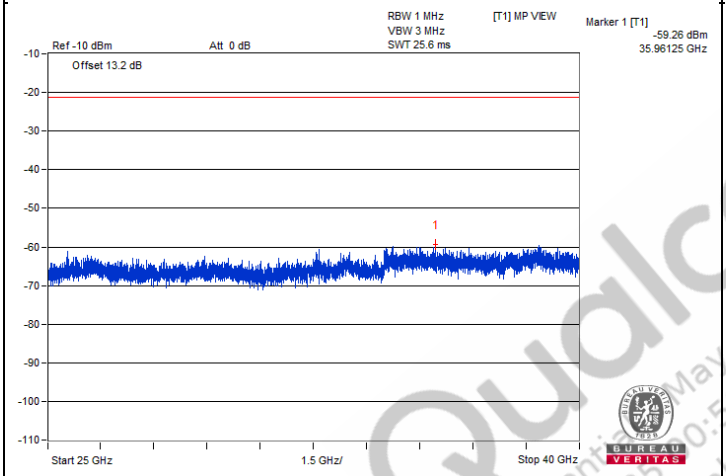

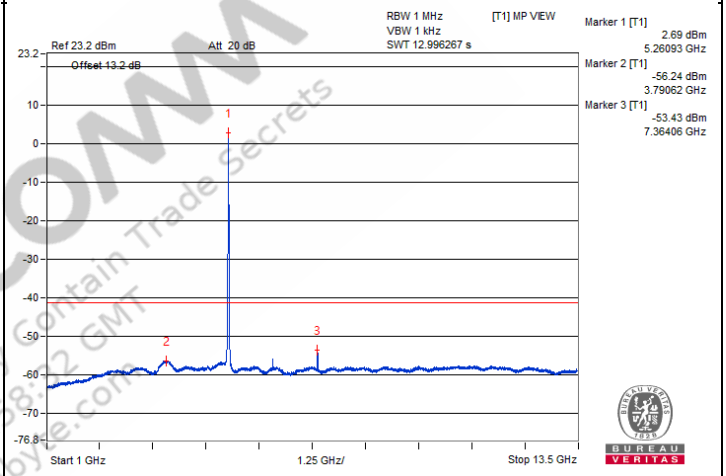


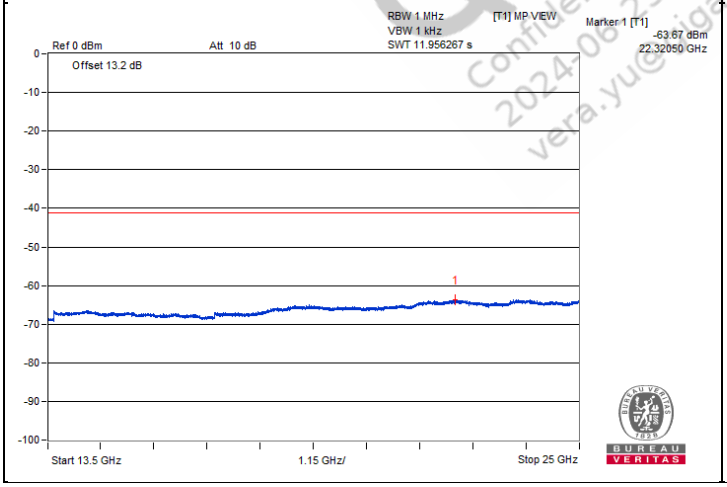


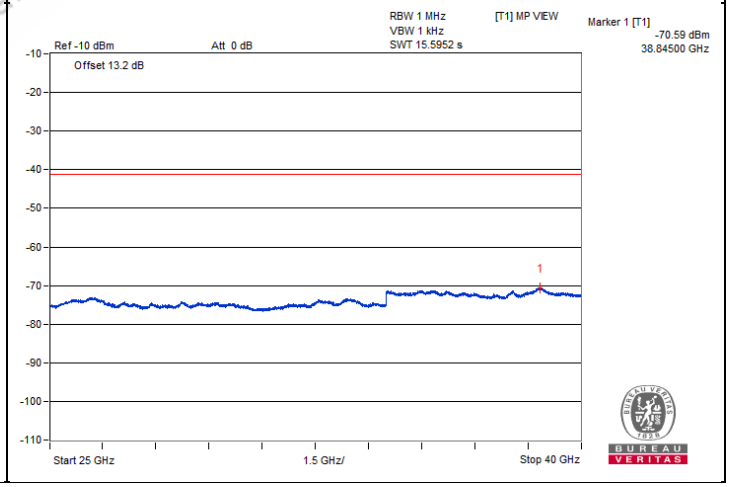



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

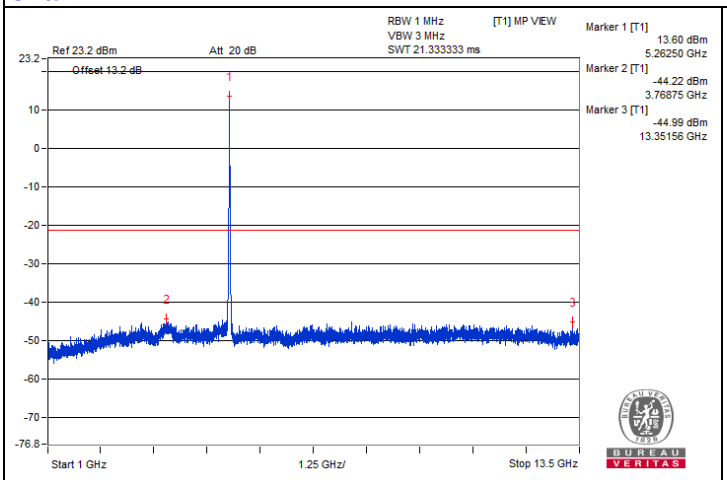


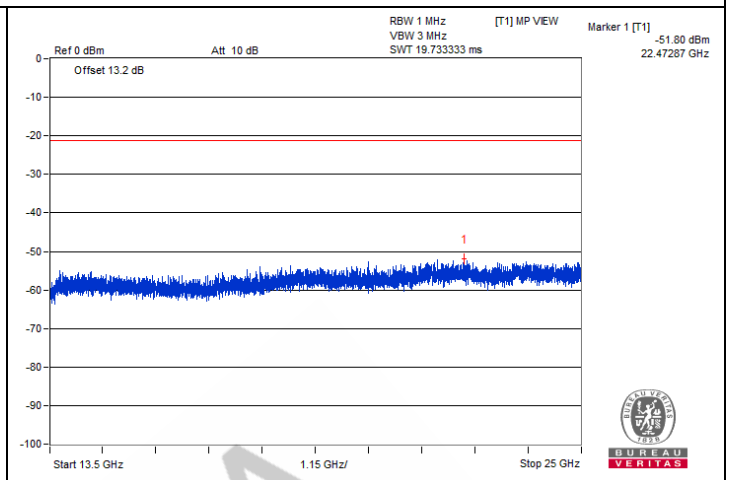

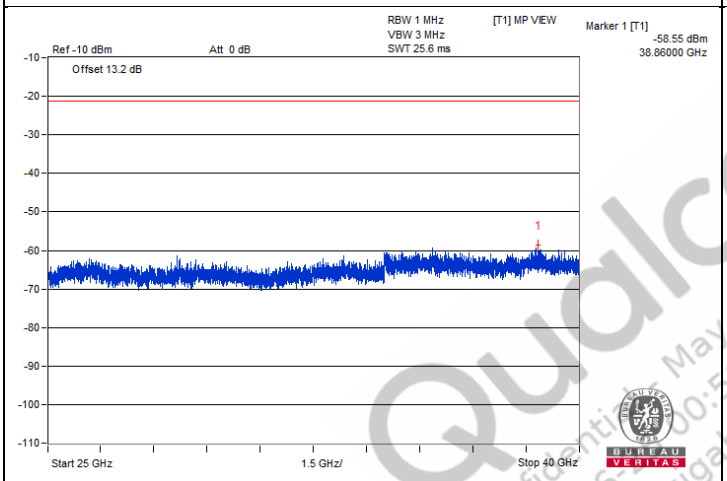

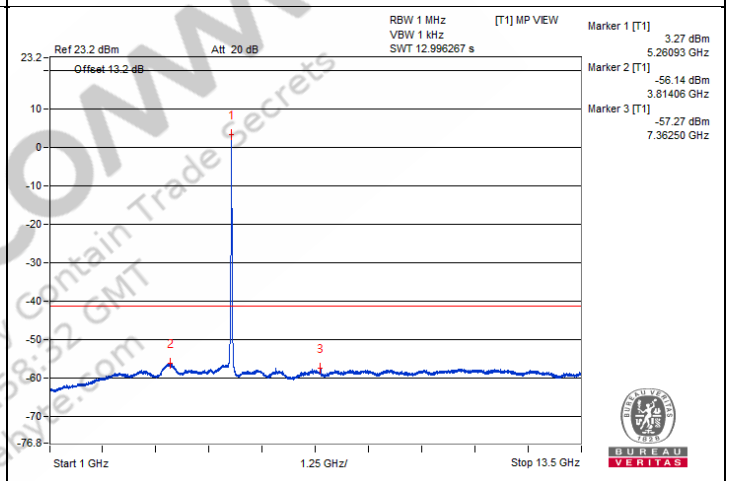

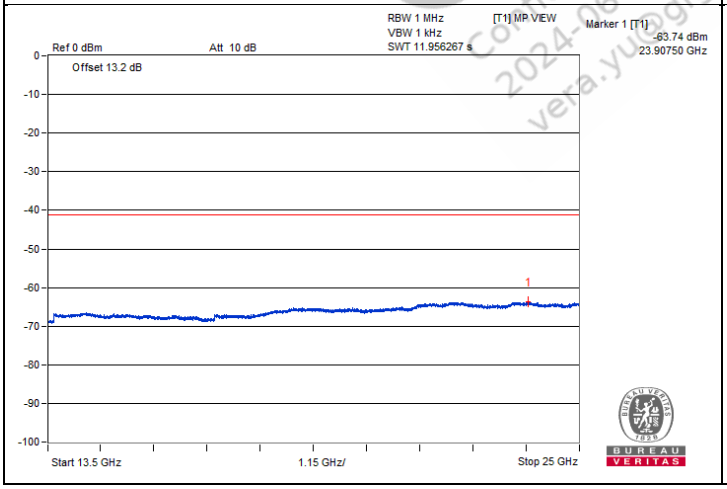

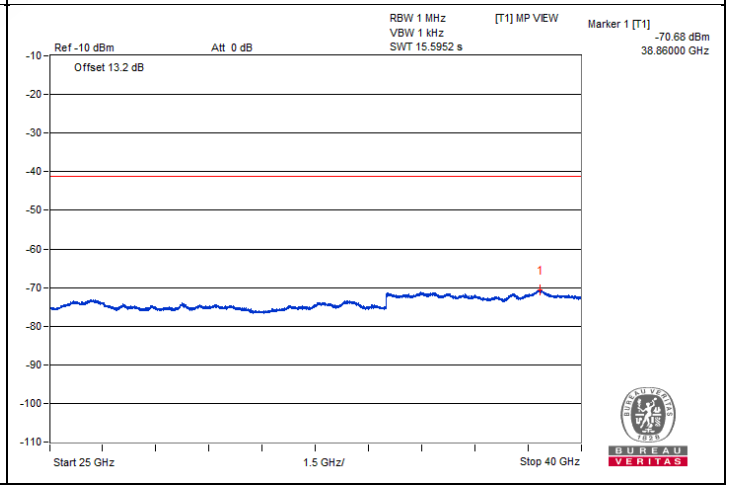

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalive.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5362.32	56.89 PK	74	-17.11	-48.43	-47.26	6.43	-38.37
2	5350.4	45.78 AV	54	-8.22	-58.9	-58.94	6.43	-49.48

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

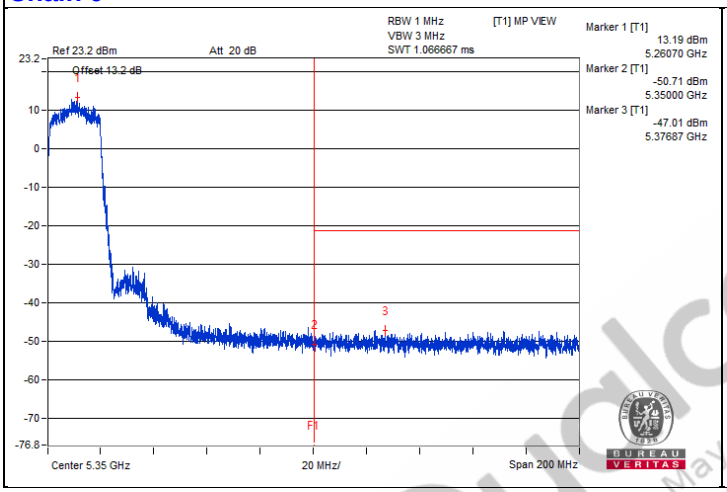

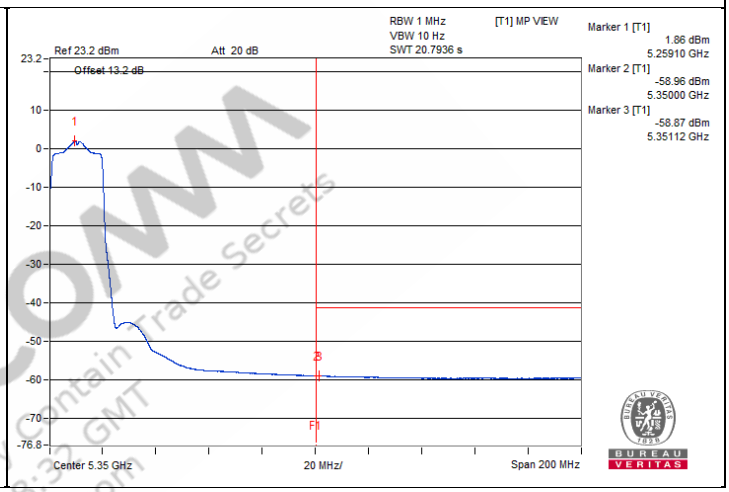

Chain 1

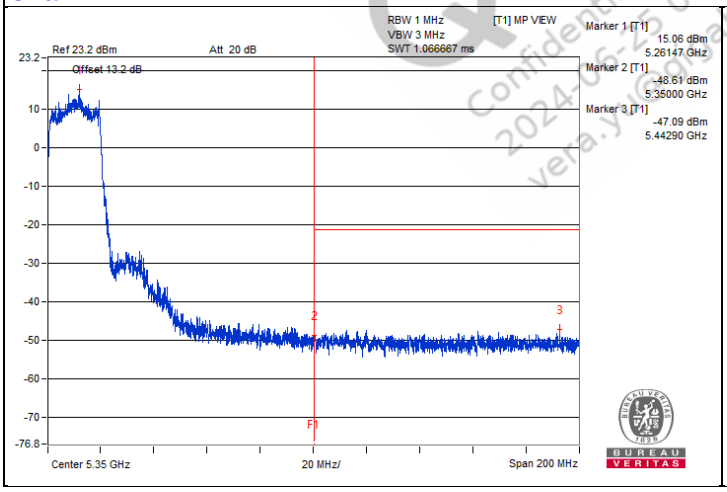

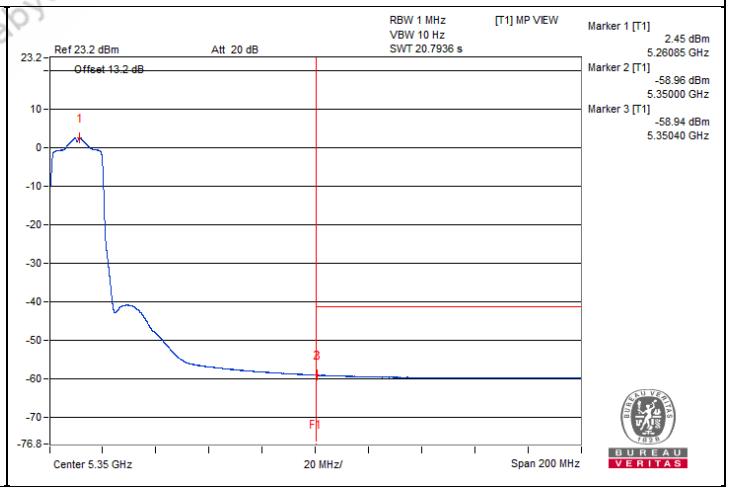

Qualcomm Confidential - May contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@cnbyte.com

802.11be (EHT20) - Channel 60

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3515.62	57.88 PK	74	-16.12	-49.89	-47.55	8.17	-37.38
2	3540.62	47.45 AV	54	-6.55	-58.93	-59.06	8.17	-47.81
3	#7068.75	58 PK	68.2	-10.2	-47.97	-48.97	8.17	-37.26
4	#10596.87	60.25 PK	68.2	-7.95	-47.29	-45.32	8.17	-35.01
5	10614.06	48.71 AV	54	-5.29	-57.75	-57.72	8.17	-46.55
6	15912.12	48.36 PK	74	-25.64	-57.7	-58.49	8.17	-46.90
7	15886.25	38.75 AV	54	-15.25	-67.68	-67.71	8.17	-56.51


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

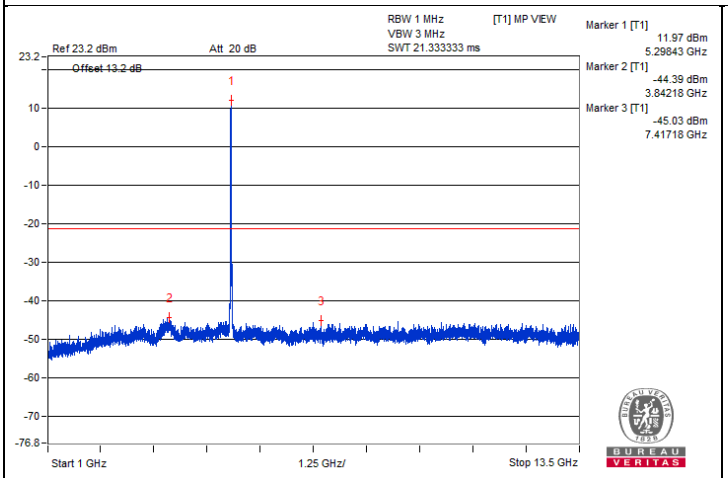


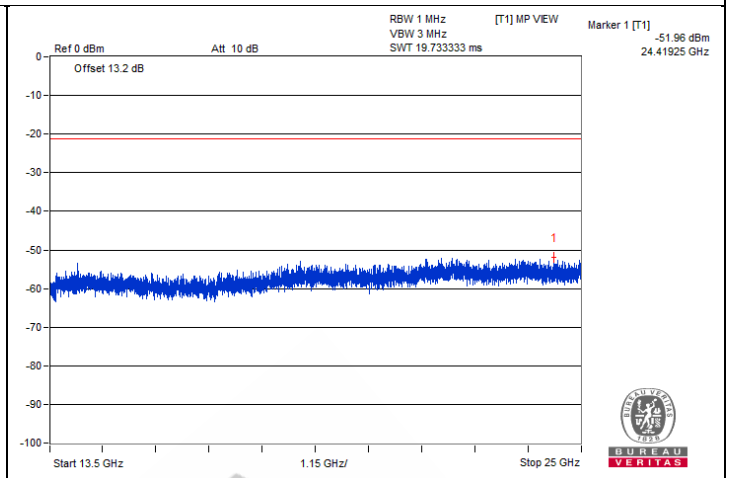

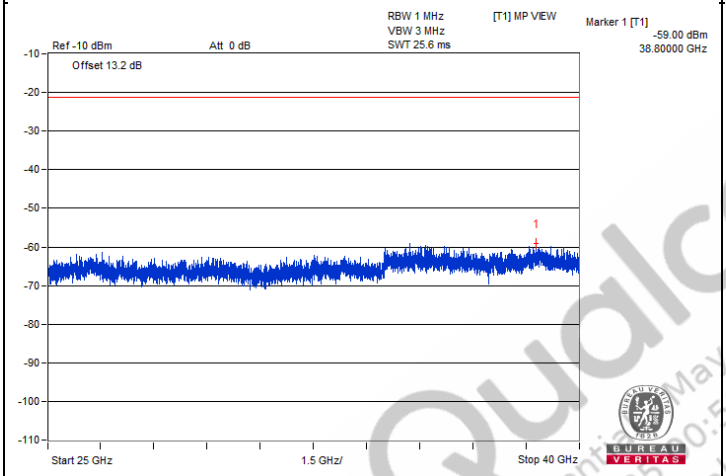

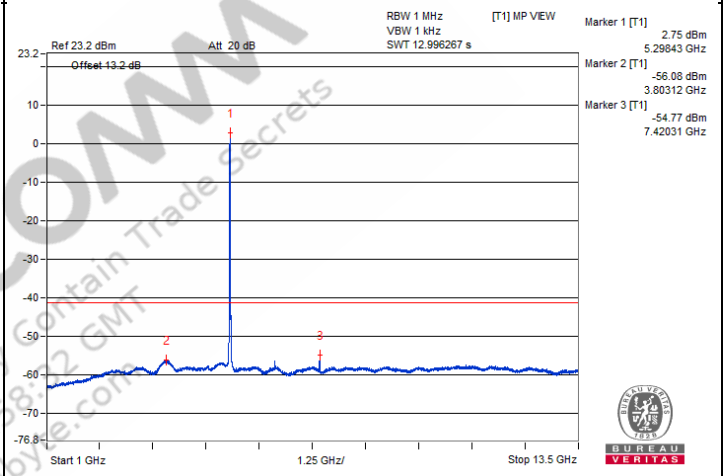


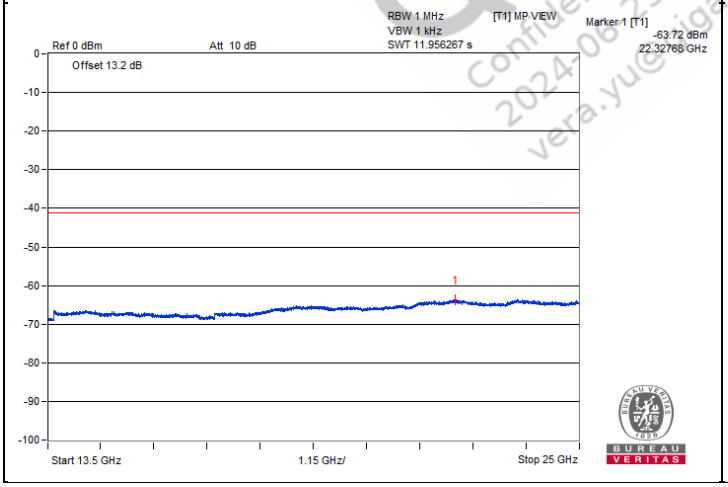


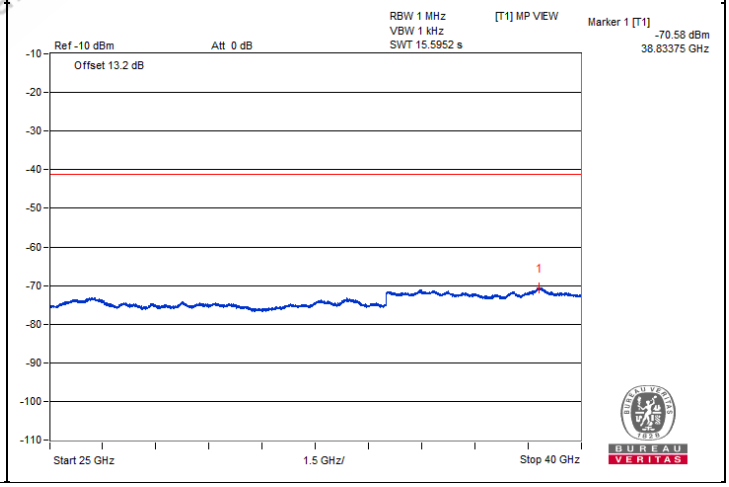



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

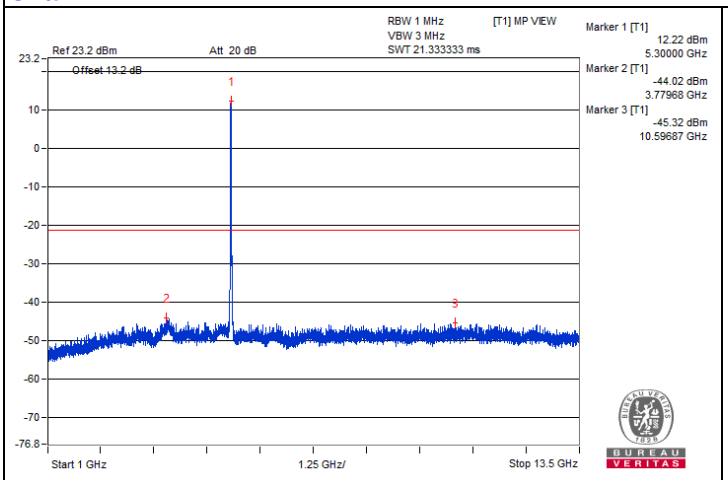


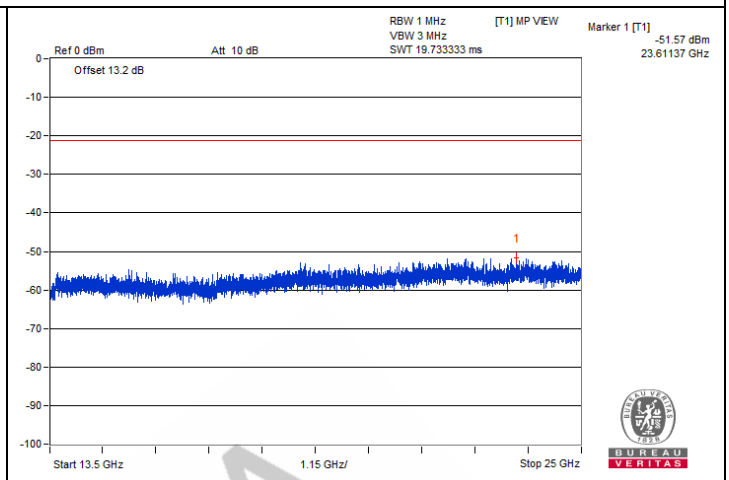

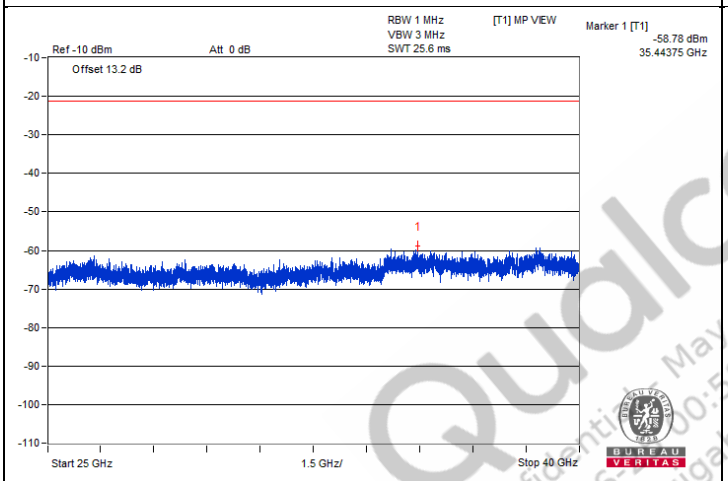

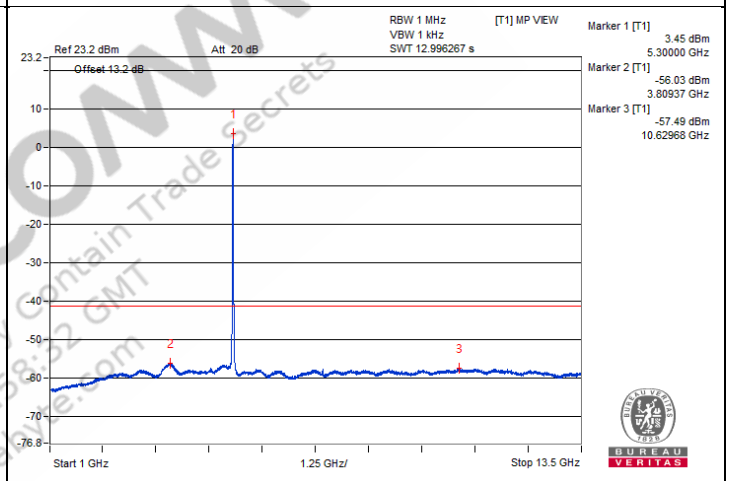

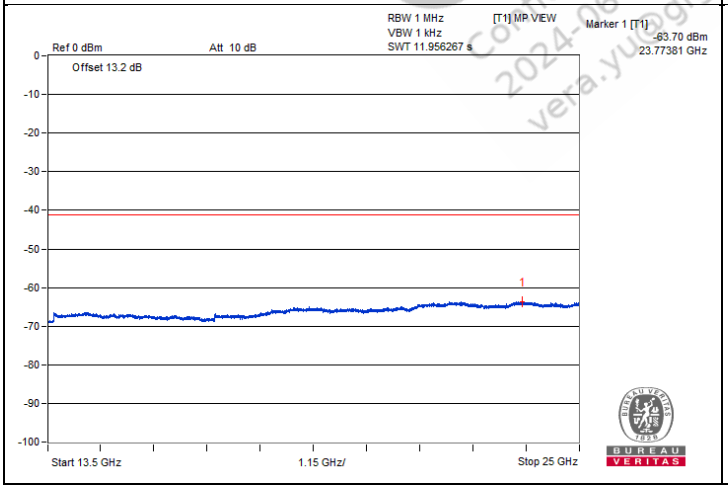

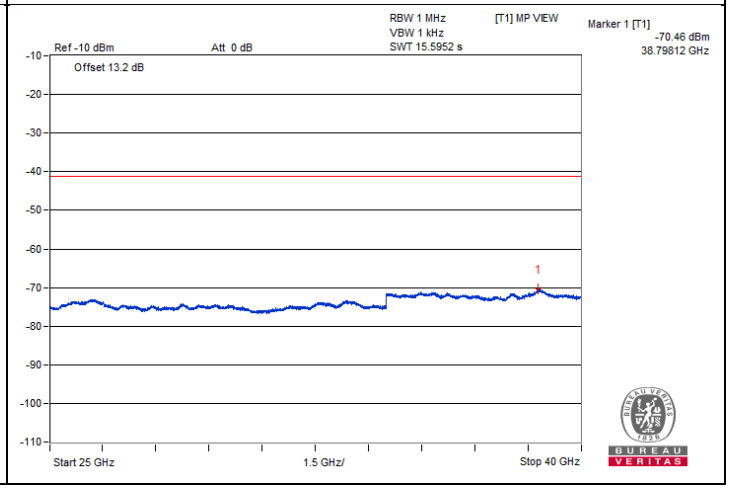

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.85	57.96 PK	74	-16.04	-45.54	-48.4	6.43	-37.30
2	5350.22	47.15 AV	54	-6.85	-57.72	-57.38	6.43	-48.11

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

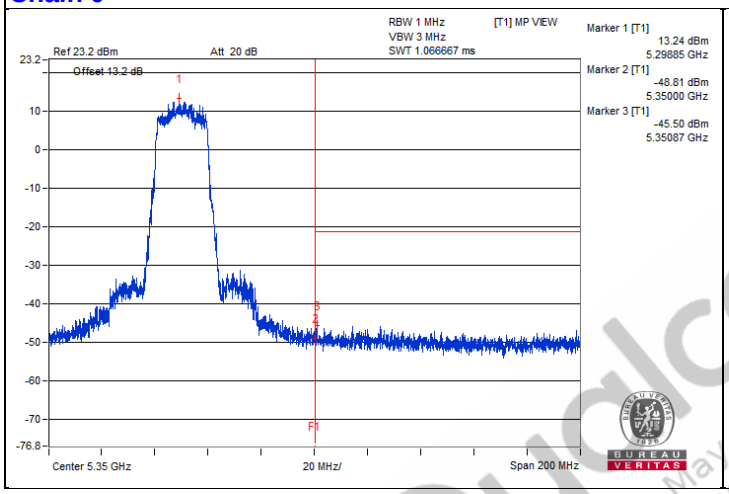

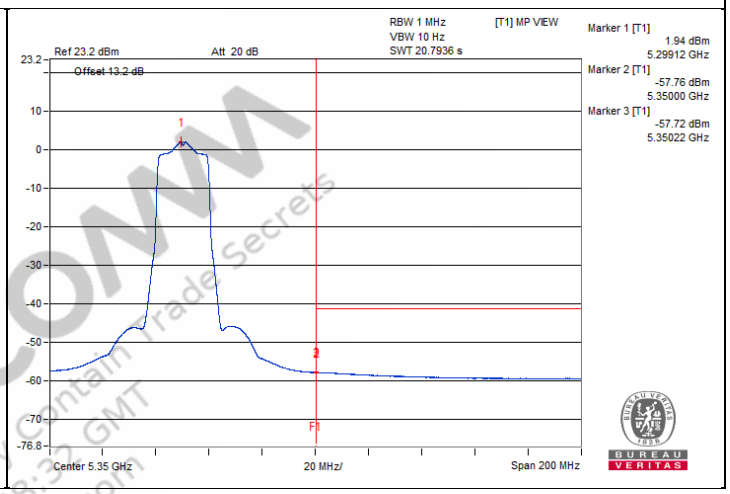

Chain 1

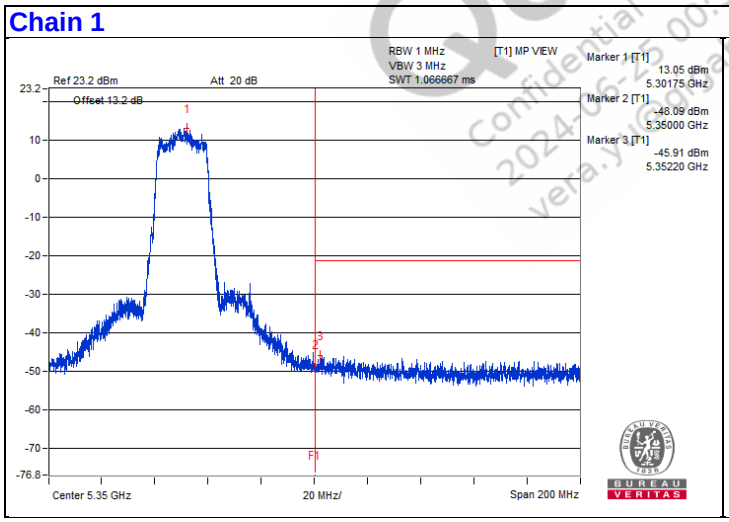

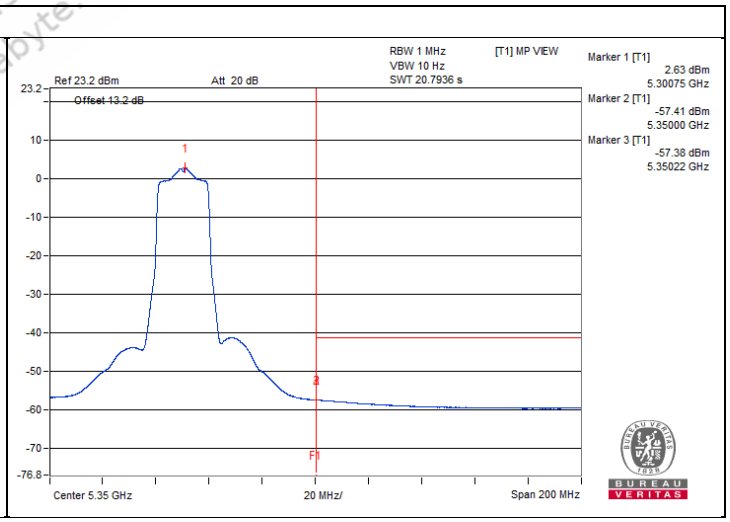

QuadCOMM Confidential - May contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@cybyte.com

802.11be (EHT20) - Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3553.12	58.28 PK	74	-15.72	-50.36	-46.7	8.17	-36.98
2	3540.62	47.42 AV	54	-6.58	-58.59	-59.5	8.17	-47.84
3	#7079.68	59.2 PK	68.2	-9	-49.4	-45.81	8.17	-36.06
4	10625	59.82 PK	74	-14.18	-48.62	-45.25	8.17	-35.44
5	10637.5	48.68 AV	54	-5.32	-57.71	-57.82	8.17	-46.58
6	15968.18	48.73 PK	74	-25.27	-56.83	-58.82	8.17	-46.53
7	15955.25	38.76 AV	54	-15.24	-67.97	-67.4	8.17	-56.50


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

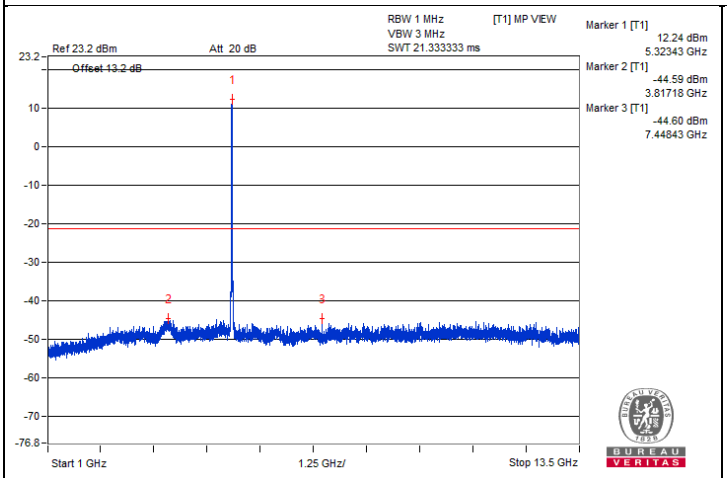


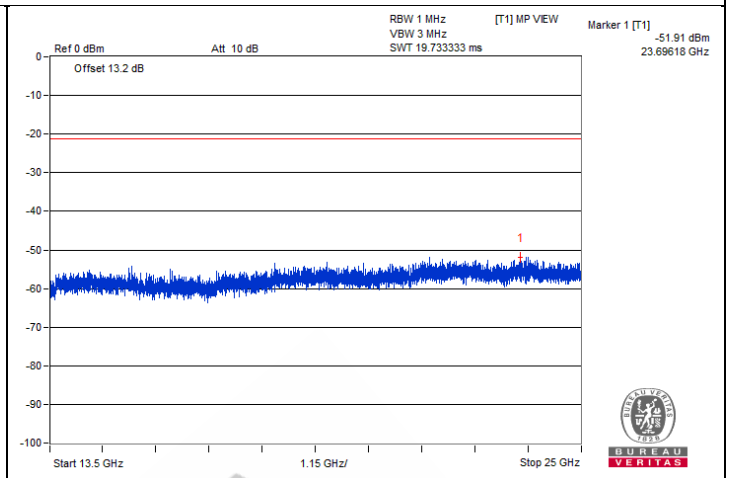

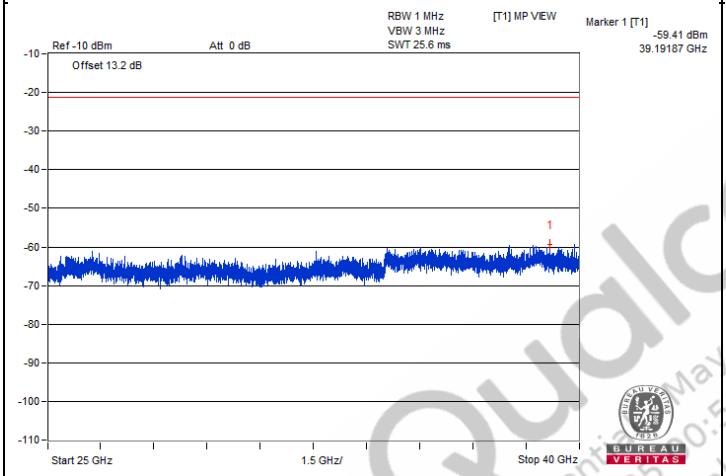

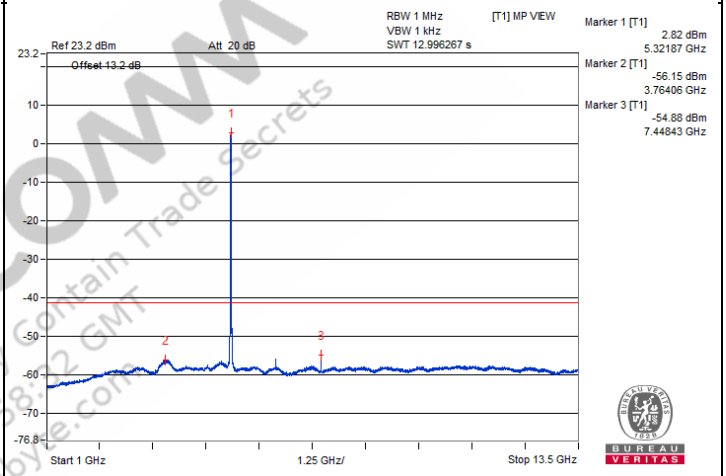


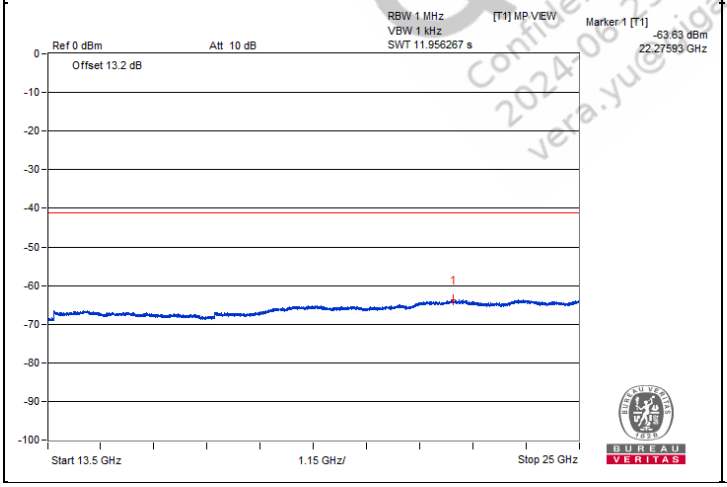


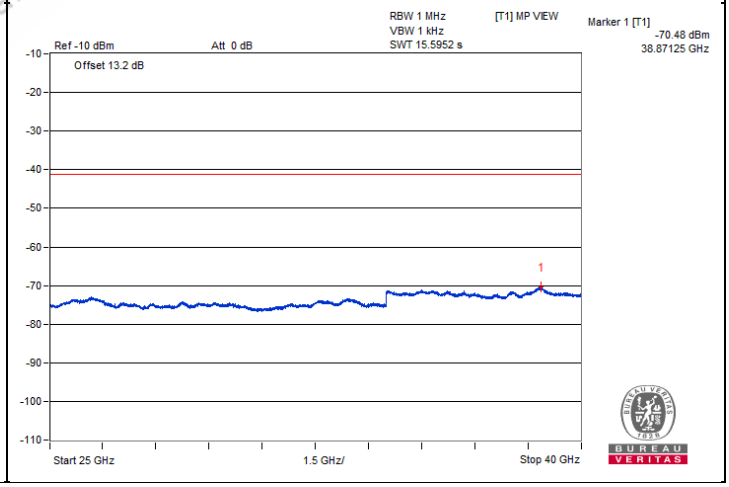



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

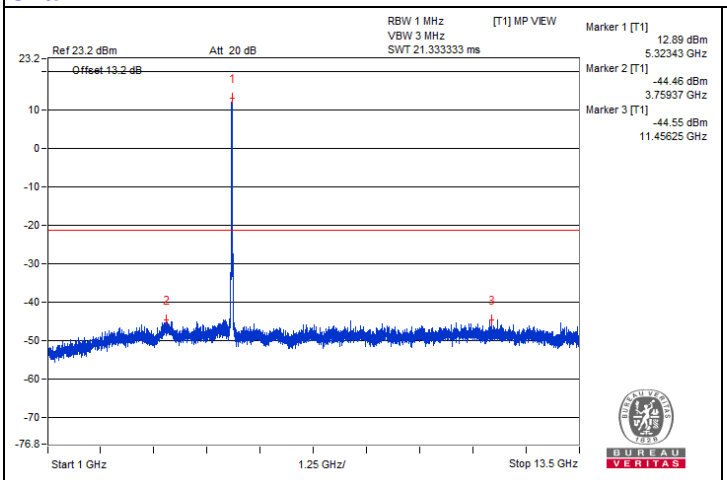


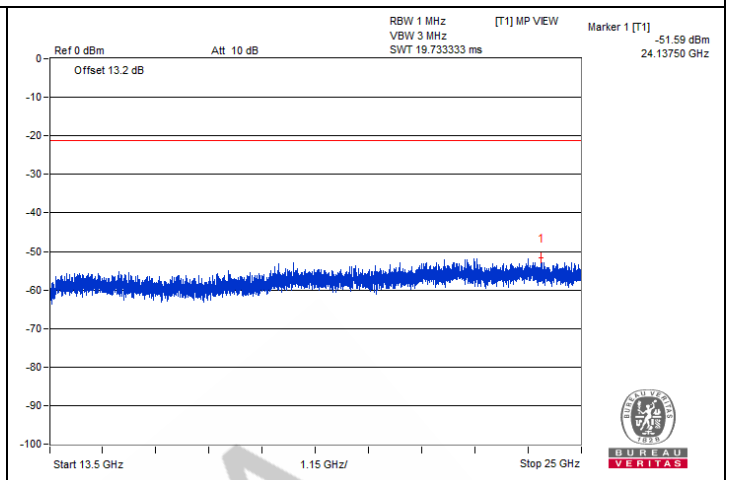

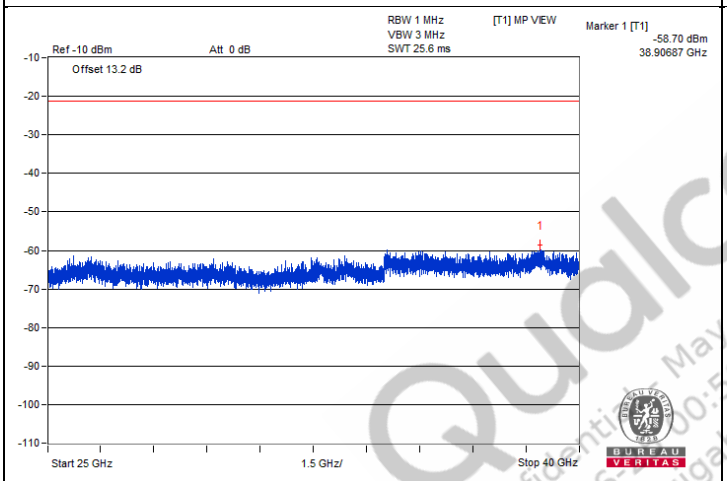

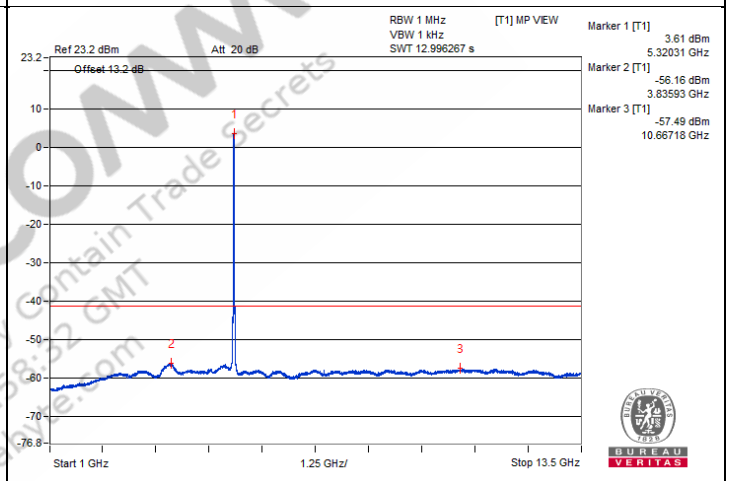

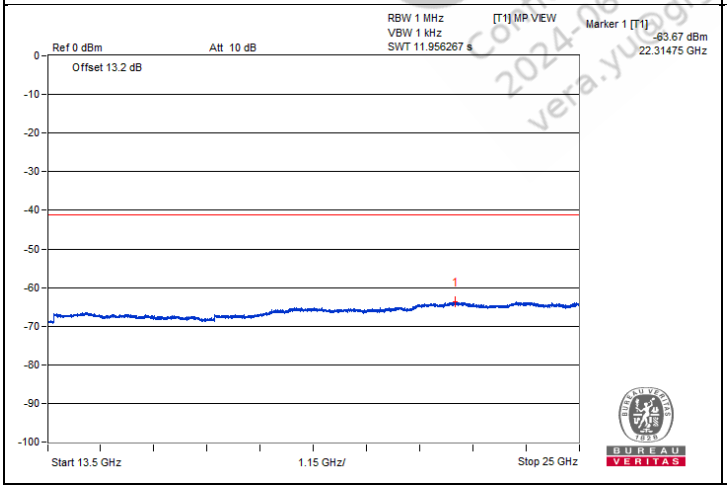

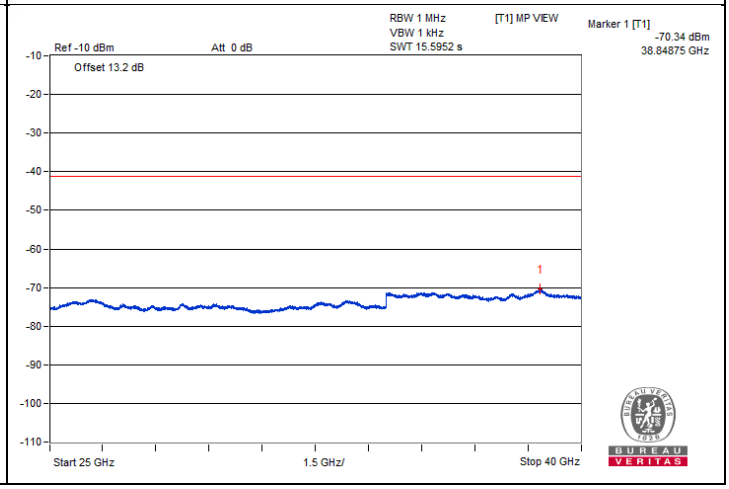

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5352.77	64.88 PK	74	-9.12	-46.3	-37.33	6.43	-30.38
2	5350	52.02 AV	54	-1.98	-55.5	-50.99	6.43	-43.24

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

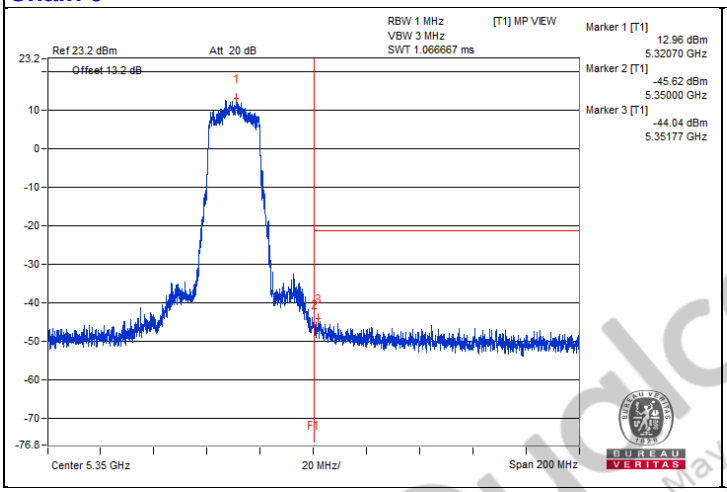

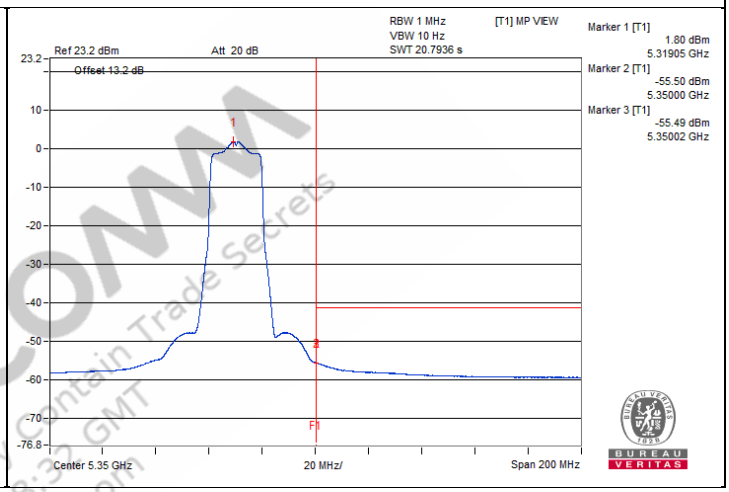

Chain 1

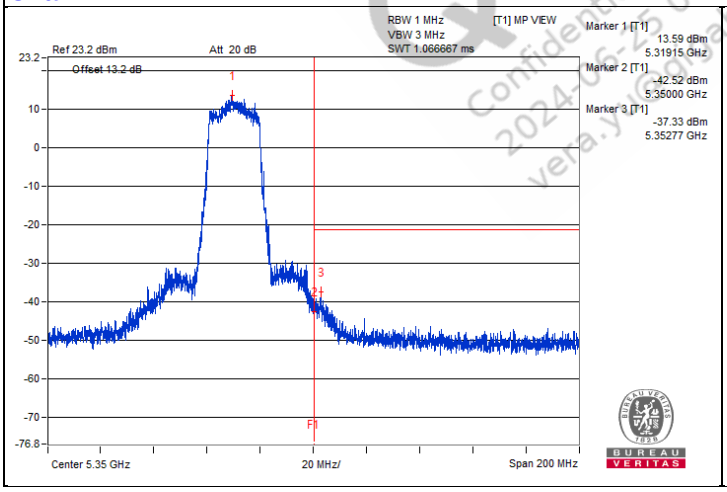

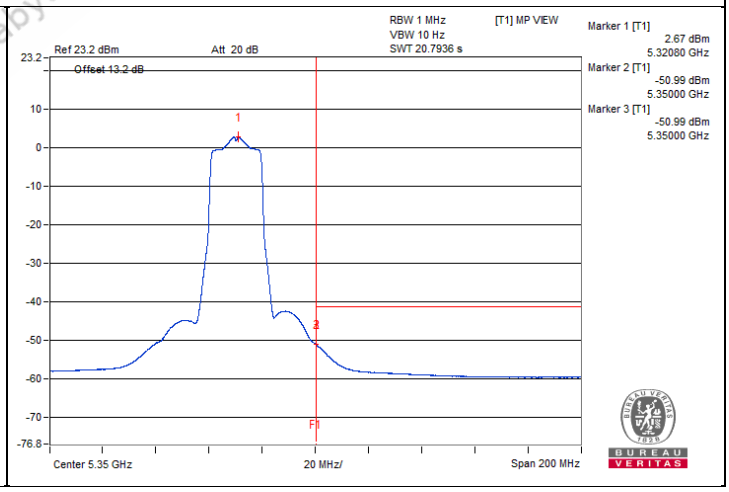

Qualcomm
Confidential - Maintain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@cybyte.com

802.11be (EHT20) - Channel 100

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3682.81	61 PK	74	-13	-46.57	-44.54	8.17	-34.26
2	3685.93	49.3 AV	54	-4.7	-57.02	-57.26	8.17	-45.96
3	7323.43	59.1 PK	74	-14.9	-48	-46.77	8.17	-36.16
4	7315.62	48.12 AV	54	-5.88	-58.1	-58.55	8.17	-47.14
5	11007.81	59.36 PK	74	-14.64	-46.6	-47.62	8.17	-35.90
6	10995.31	48.61 AV	54	-5.39	-57.83	-57.83	8.17	-46.65
7	#16504.37	48.37 PK	68.2	-19.83	-57.73	-58.44	8.17	-46.89


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

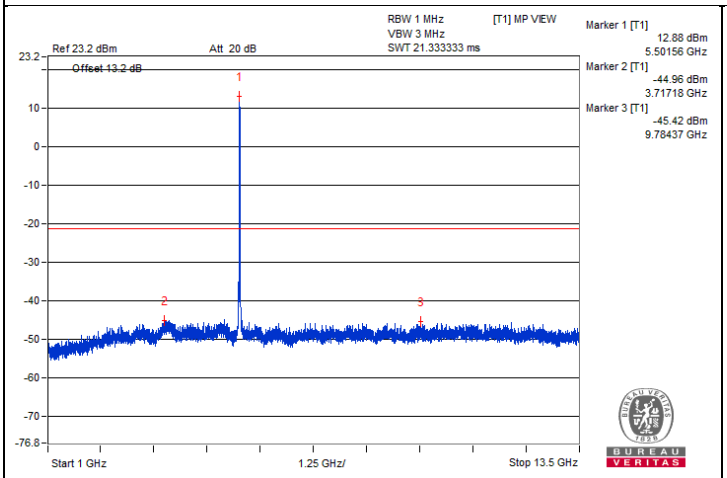


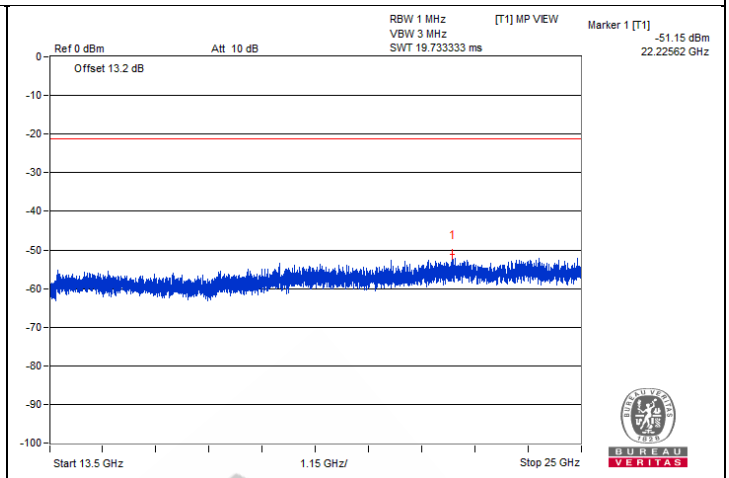

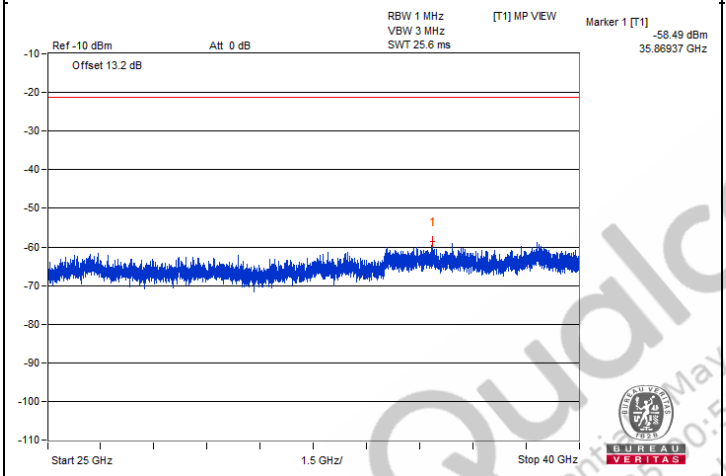

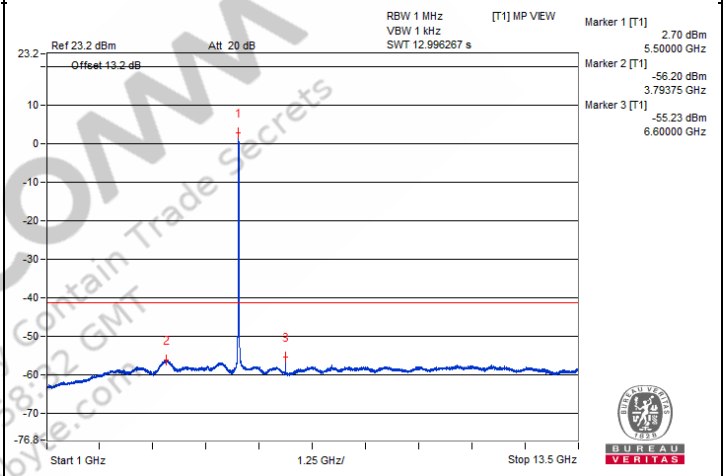


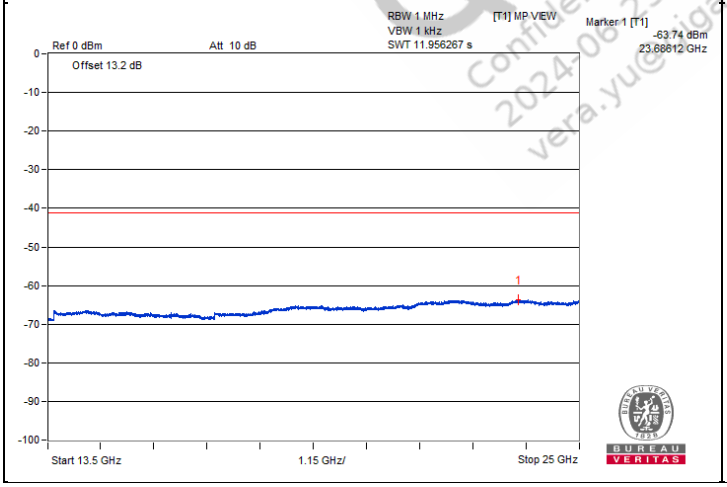


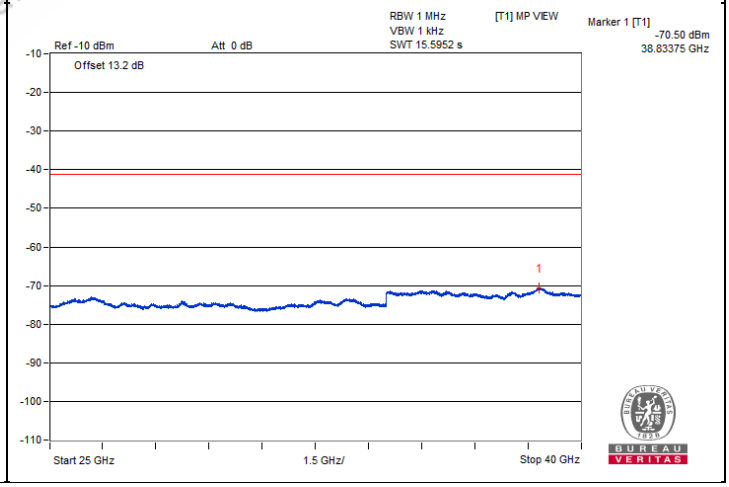



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

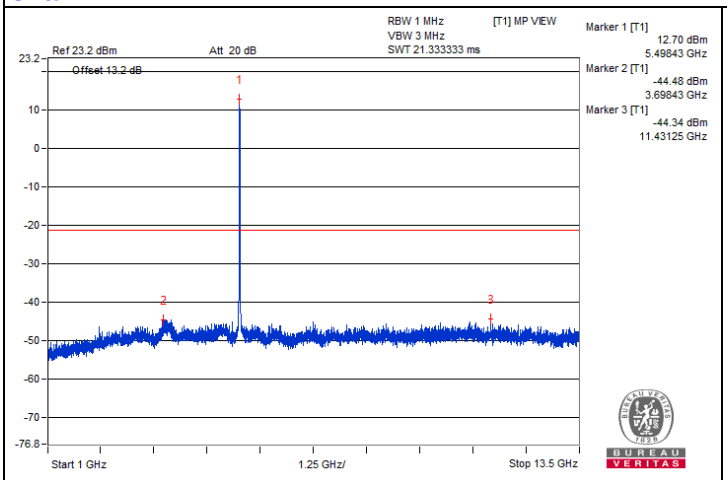


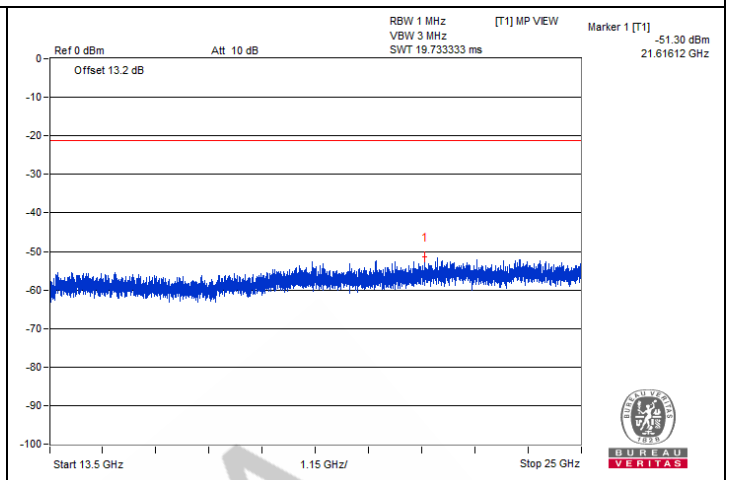

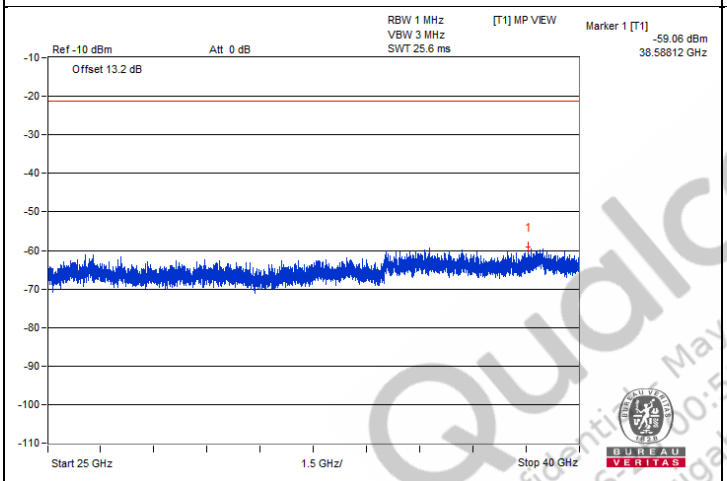

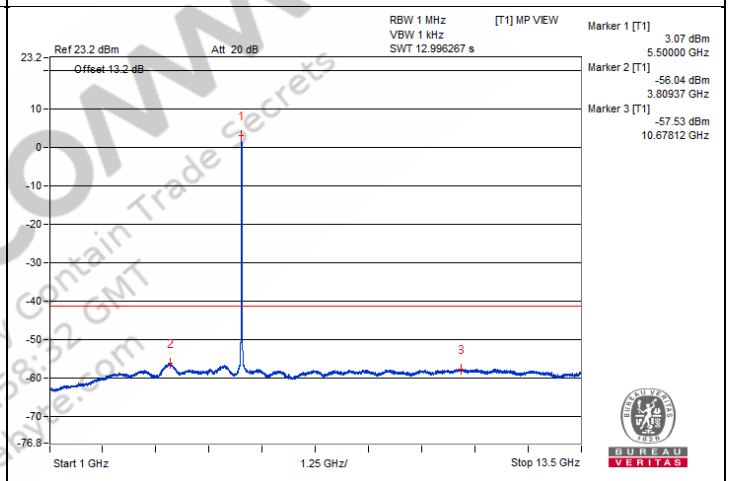

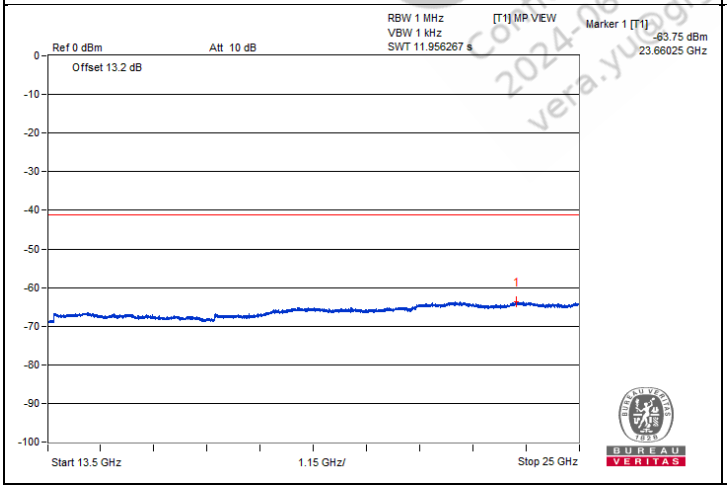

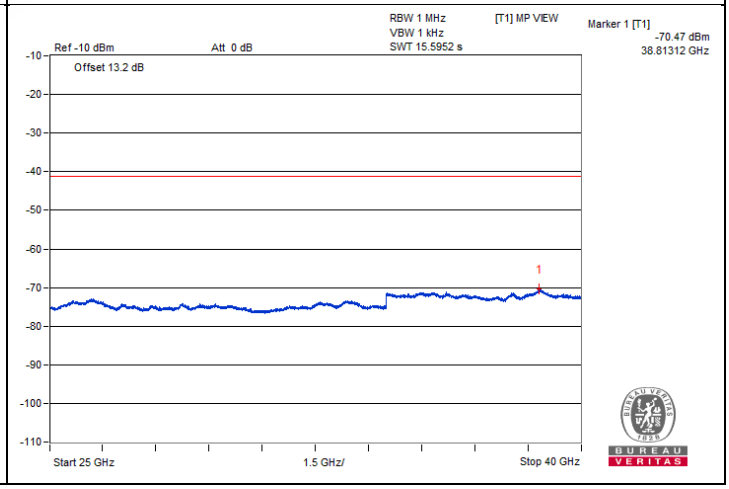

QualcoMM
Confidential - May Contain Trade secrets
2024-06-20 00:58:32 GMT
vera.yu@qgatvre.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5454.81	59.86 PK	74	-14.14	-46.91	-45.65	7.82	-35.40
2	5459.84	49.15 AV	54	-4.85	-57.1	-56.78	7.82	-46.11
3	#5469.37	62.56 PK	68.2	-5.64	-47.11	-41.6	7.82	-32.70


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

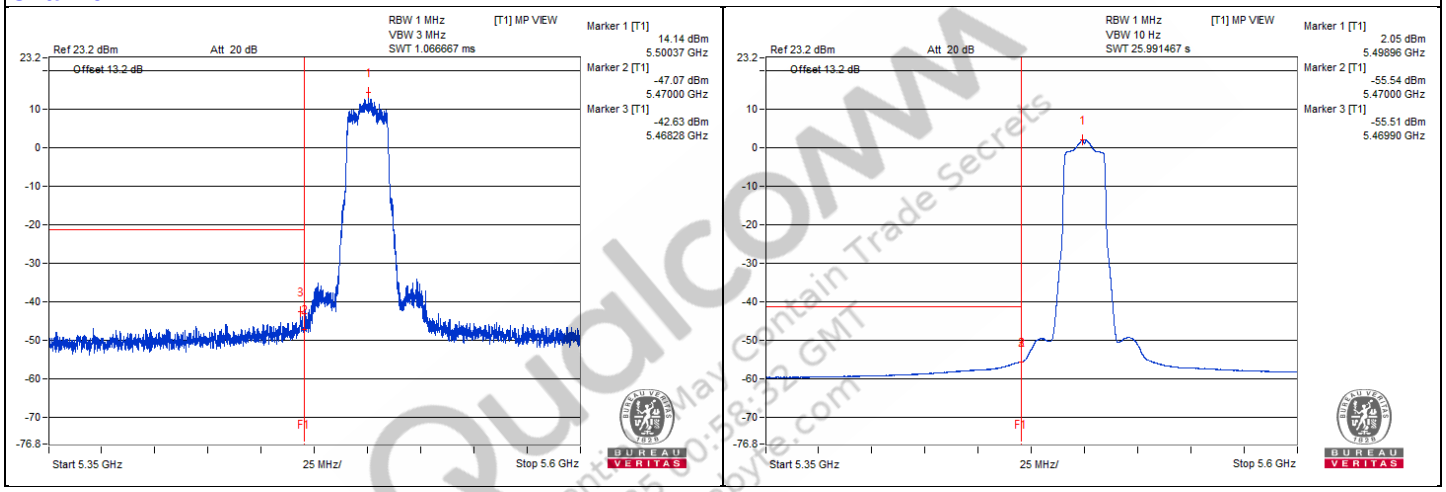

Chain 1

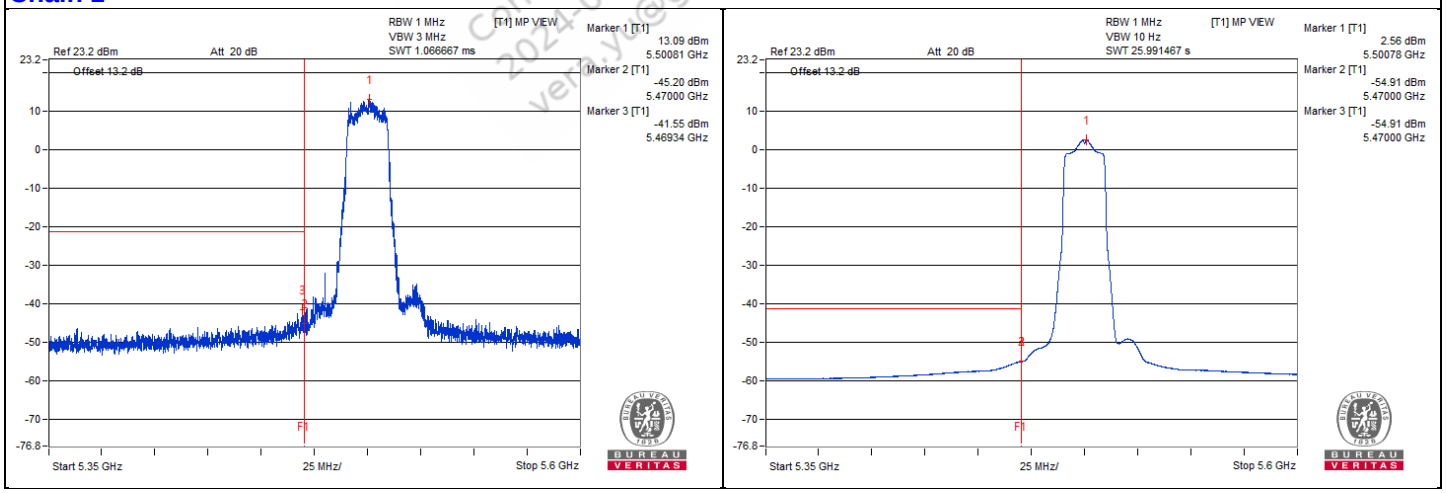

Qualcomm Confidential and Proprietary – May Contain Trade Secrets
2021-06-25 10:58:32 GMT
ver: yu@gigabyte.com

802.11be (EHT20) - Channel 116

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3703.12	61 PK	74	-13	-44.73	-46.29	8.17	-34.26
2	3735.93	49.76 AV	54	-4.24	-56.68	-56.69	8.17	-45.50
3	7451.56	58.27 PK	74	-15.73	-49.45	-47.18	8.17	-36.99
4	7425	47.5 AV	54	-6.5	-59.03	-58.86	8.17	-47.76
5	11160.93	58.95 PK	74	-15.05	-47.97	-47.06	8.17	-36.31
6	11142.18	48.43 AV	54	-5.57	-58.05	-57.97	8.17	-46.83
7	#16735.81	48.41 PK	68.2	-19.79	-57.32	-58.88	8.17	-46.85


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

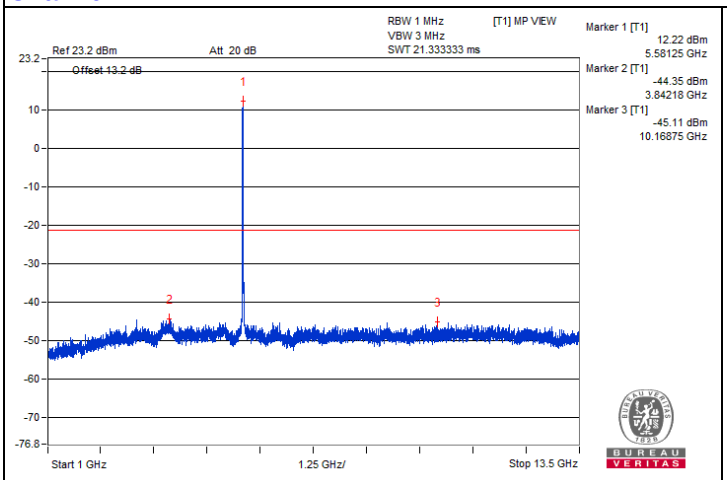


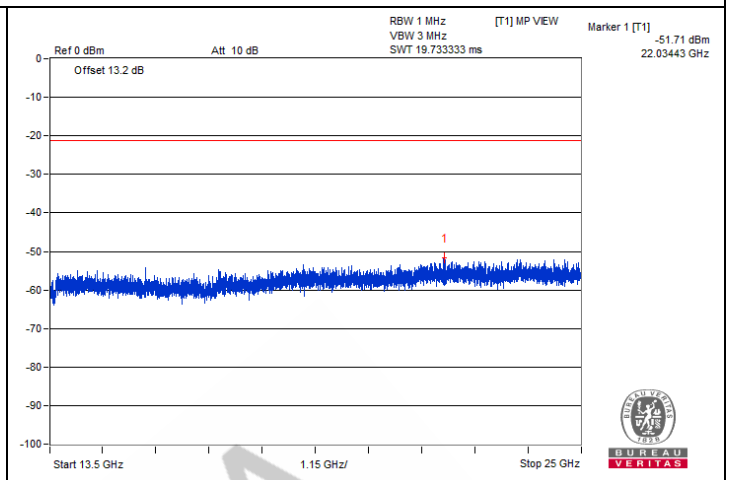

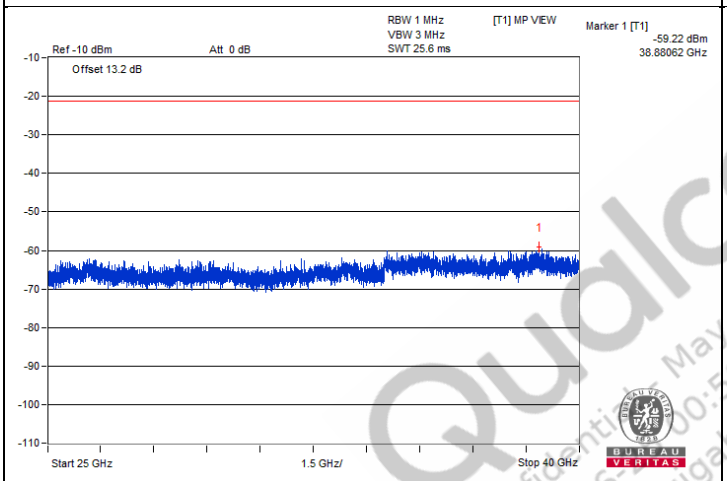

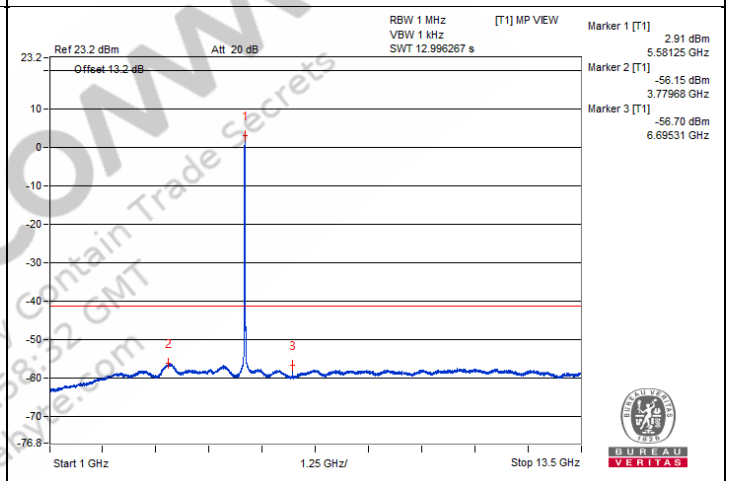


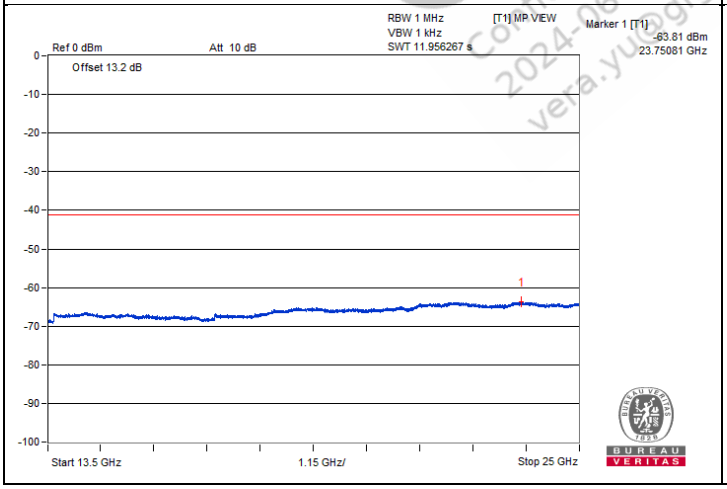


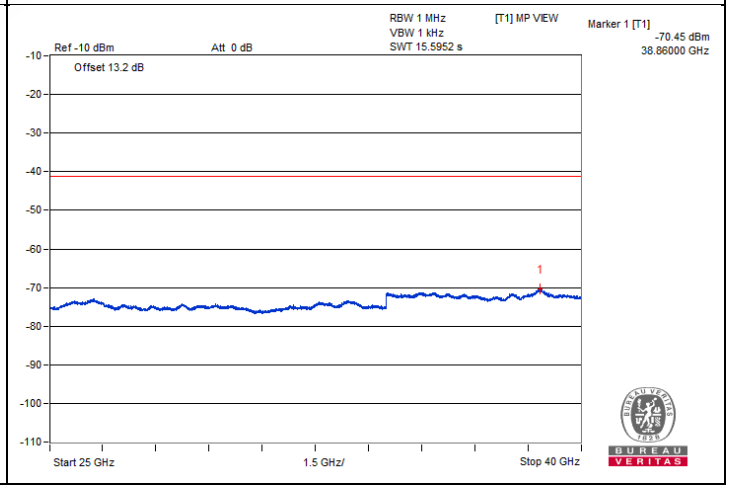



QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Chain 1

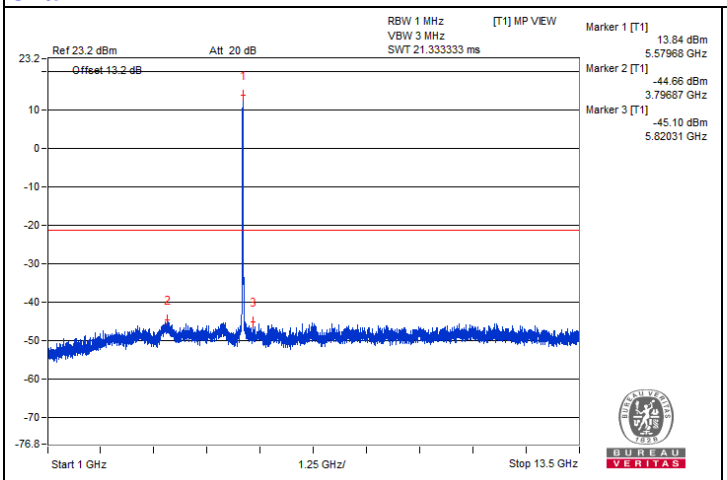


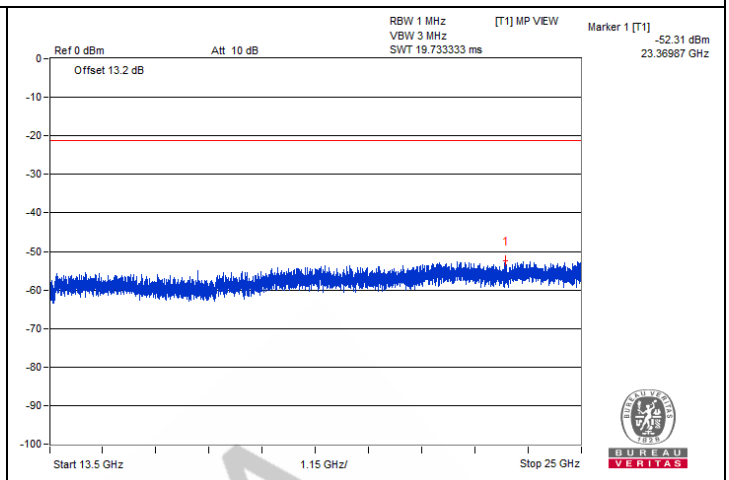

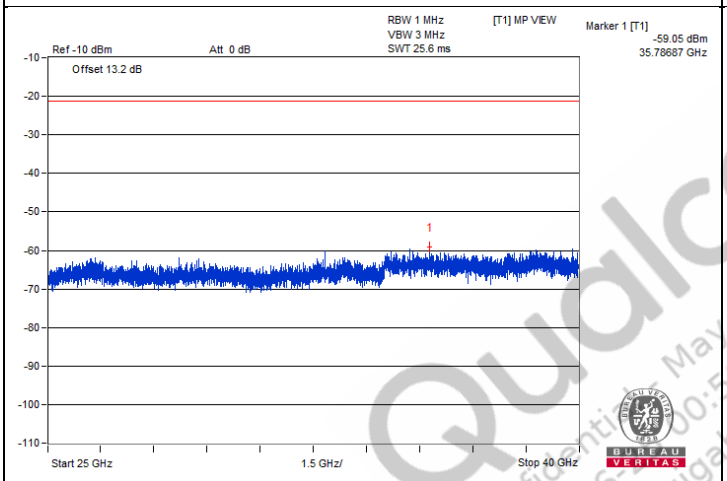

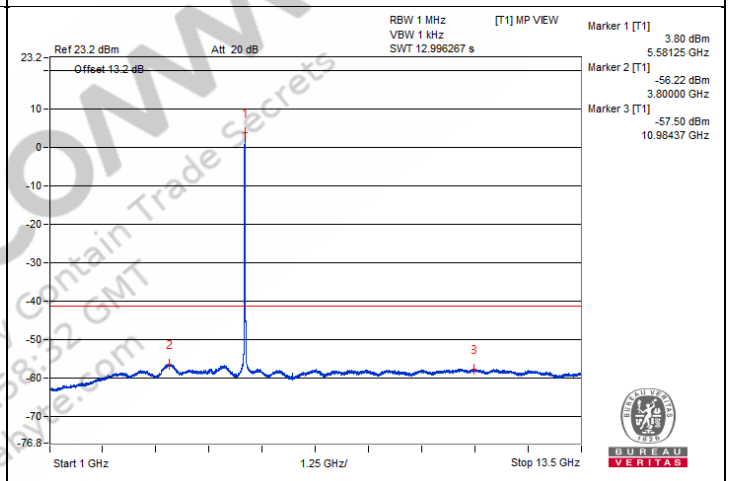

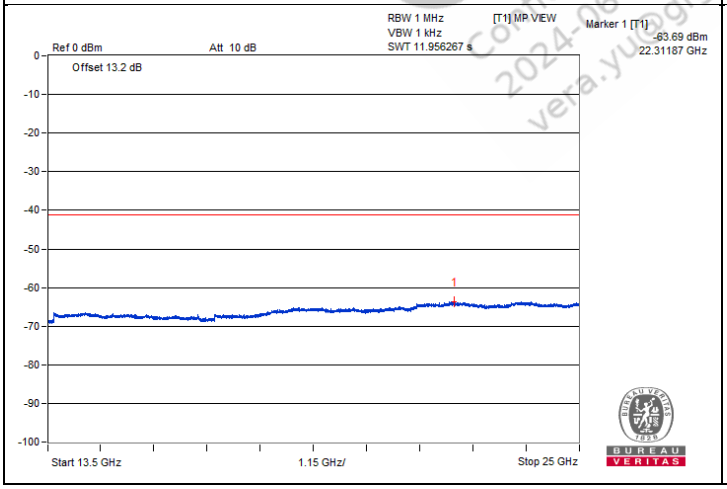

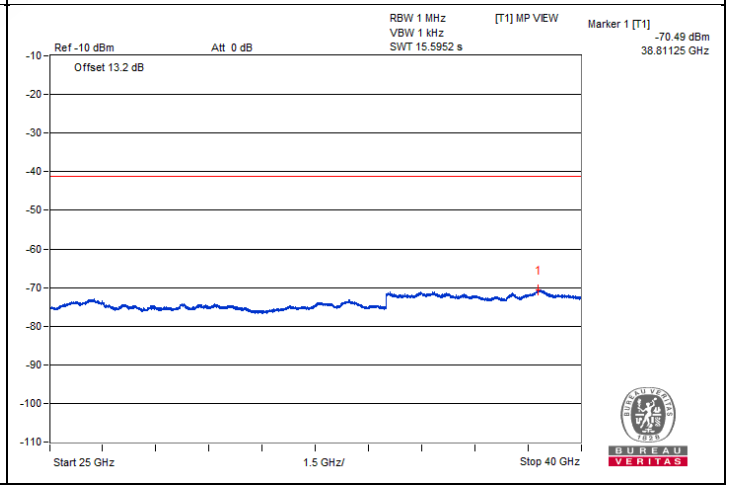

QualcoMM
Confidential - May Contain Trade secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5453.53	58.62 PK	74	-15.38	-46.39	-48.92	7.82	-36.64
2	5459.43	47.15 AV	54	-6.85	-58.92	-58.97	7.82	-48.11
3	#5461.75	58.21 PK	68.2	-9.99	-47.49	-48.32	7.82	-37.05

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

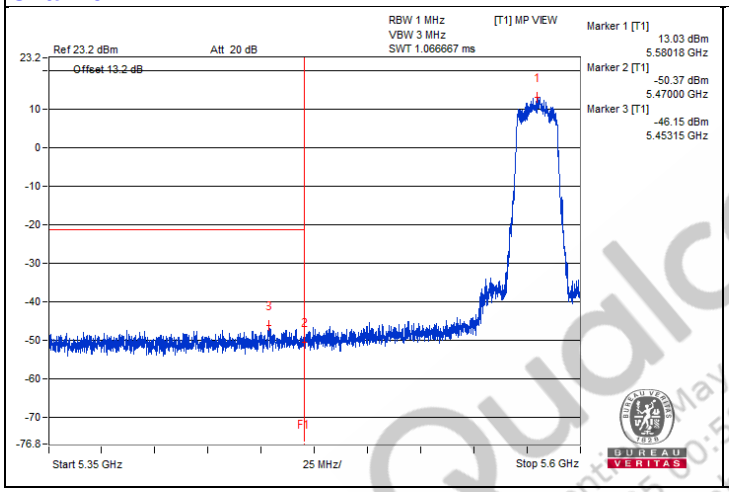

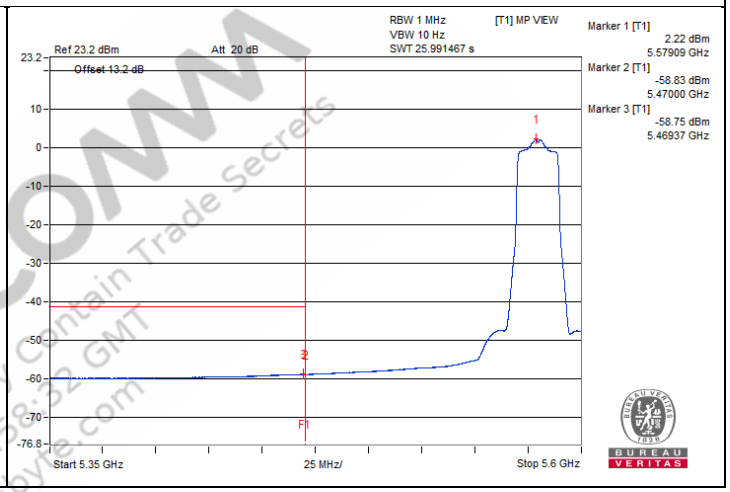

Chain 1

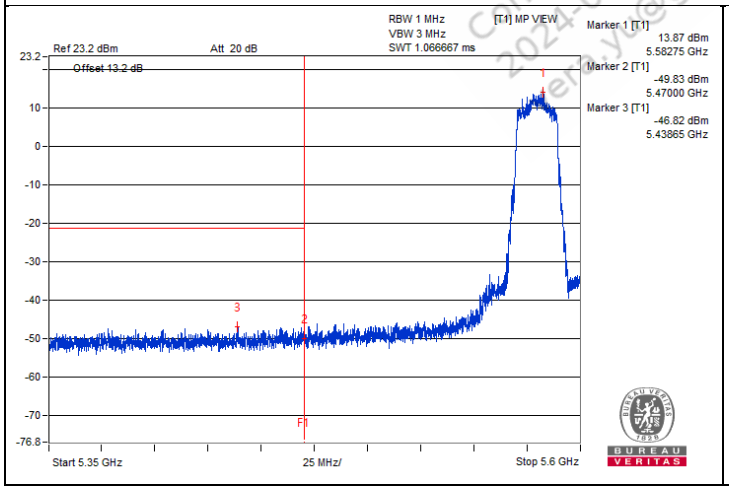

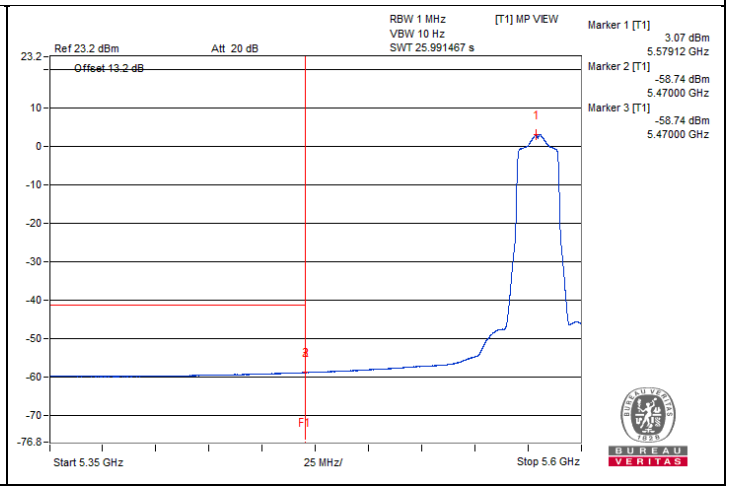

Qualcomm
Confidential - May Contain Trade Secrets
2021-06-25 00:58:32 GMT
chen.yu@gigabyte.com

802.11be (EHT20) - Channel 140

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3817.18	60.6 PK	74	-13.4	-45.69	-45.99	8.17	-34.66
2	3785.93	50.14 AV	54	-3.86	-56.05	-56.56	8.17	-45.12
3	7585.93	58.16 PK	74	-15.84	-47.97	-48.62	8.17	-37.10
4	7617.18	48.01 AV	54	-5.99	-58.14	-58.75	8.17	-47.25
5	11404.68	58.92 PK	74	-15.08	-47	-48.11	8.17	-36.34
6	11400	48.46 AV	54	-5.54	-58.06	-57.91	8.17	-46.80
7	#17111	49.6 PK	68.2	-18.6	-56.06	-57.78	8.17	-45.66


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

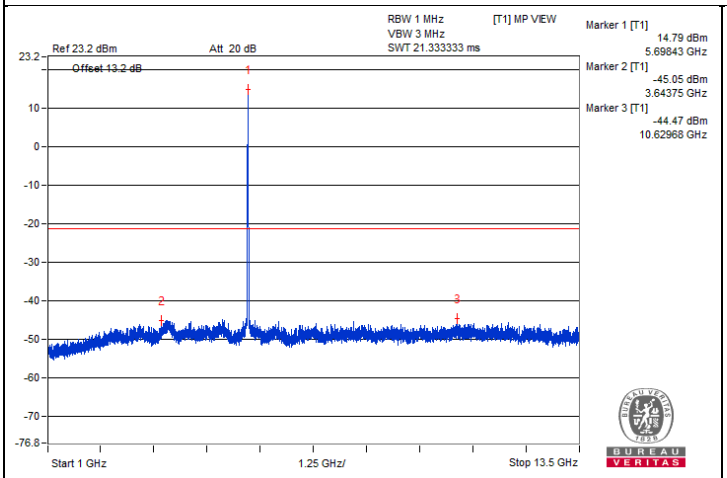


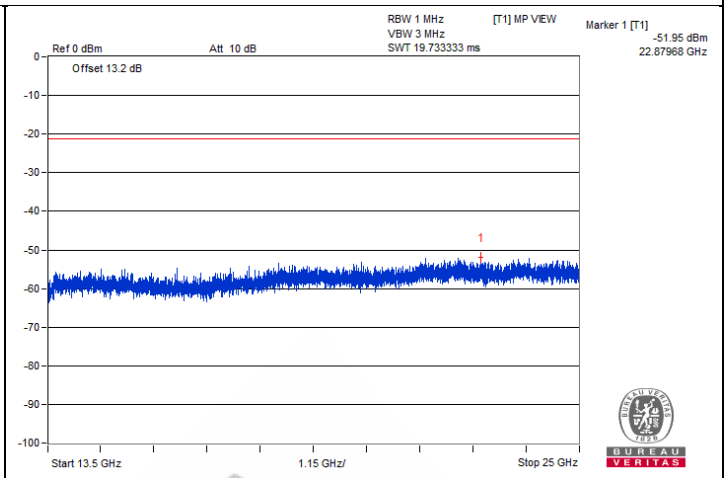

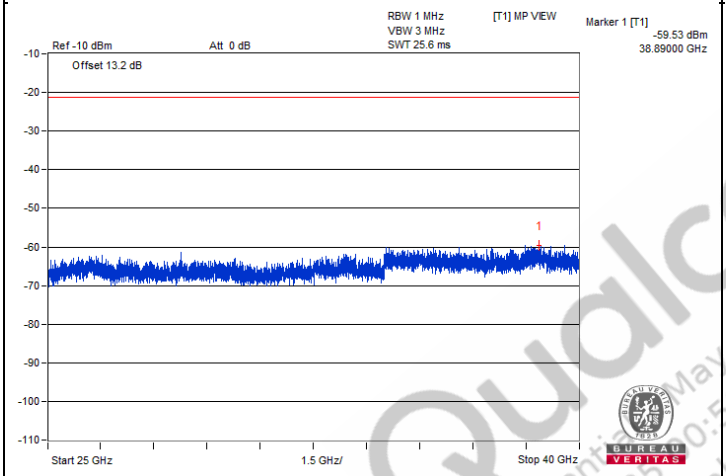

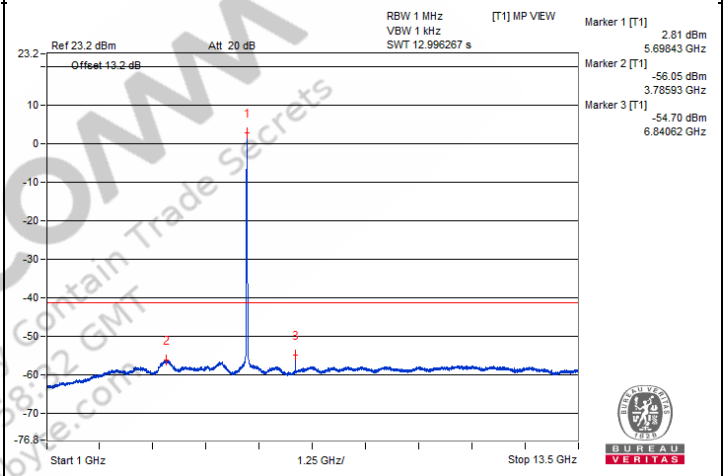


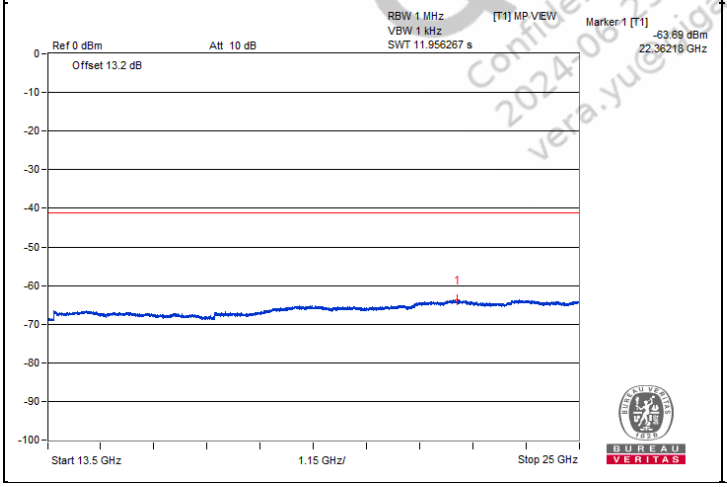


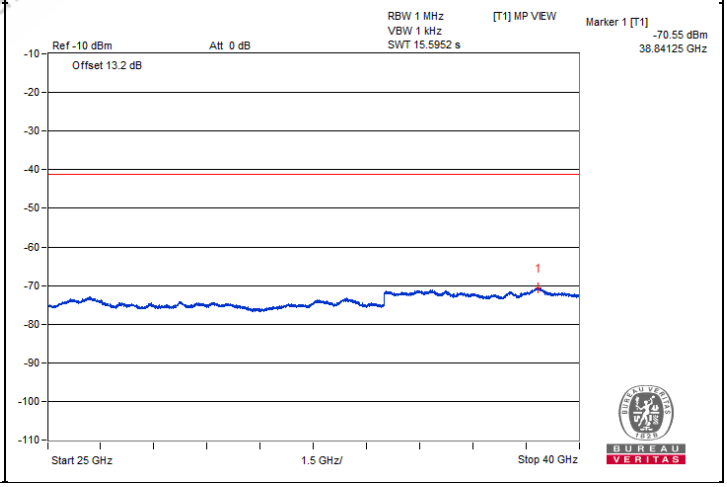



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

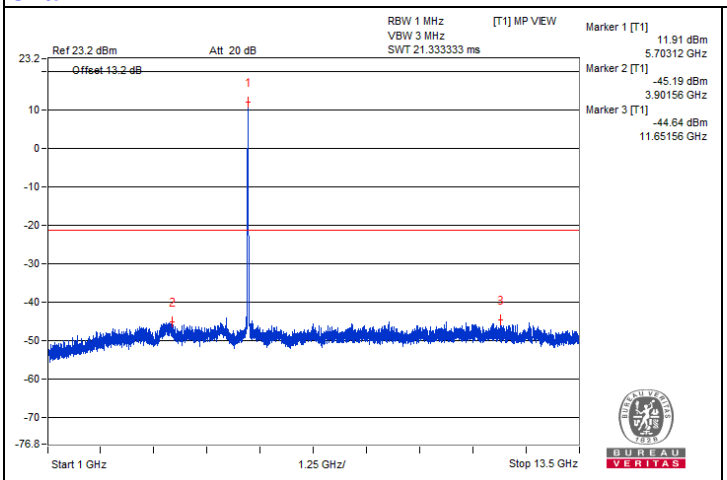


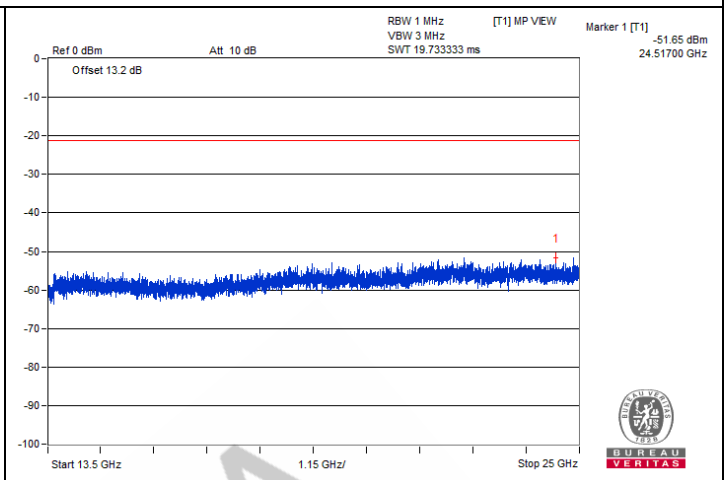

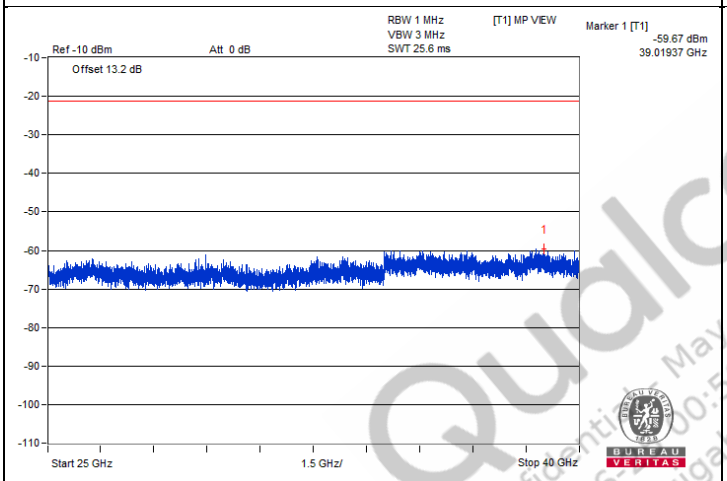

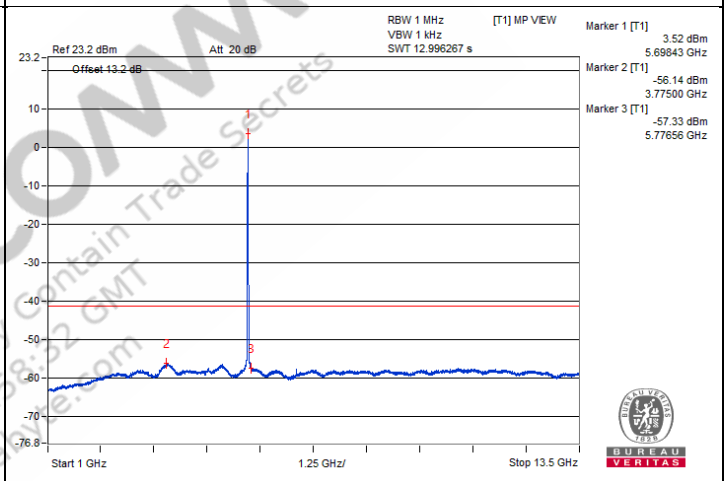

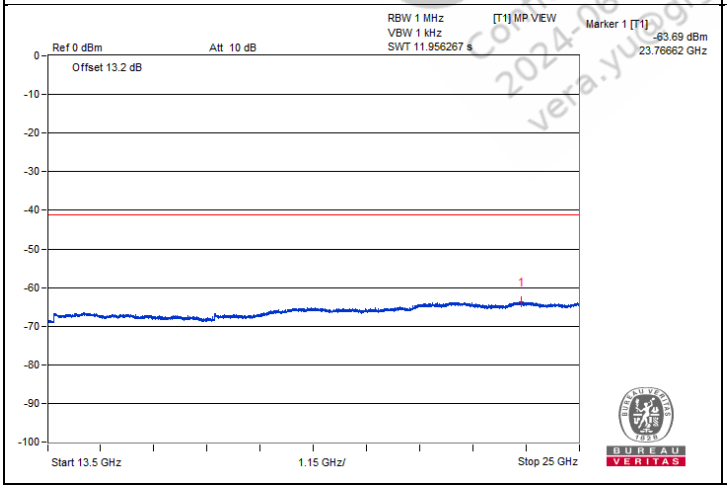

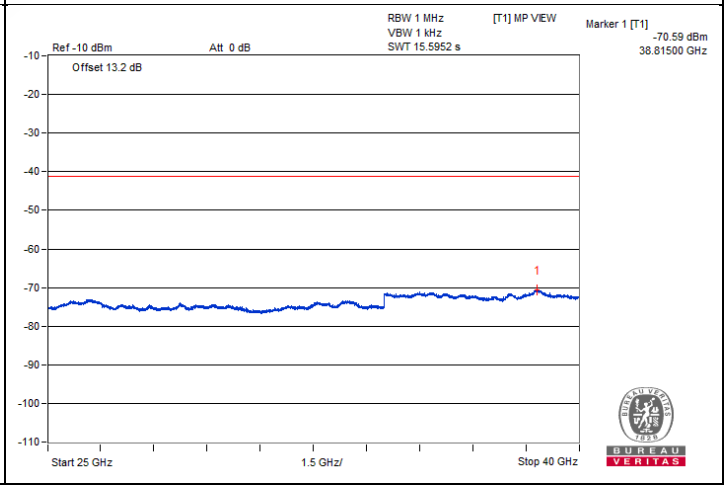

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5725.35	66.46 PK	68.2	-1.74	-39.8	-39.46	7.82	-28.80


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

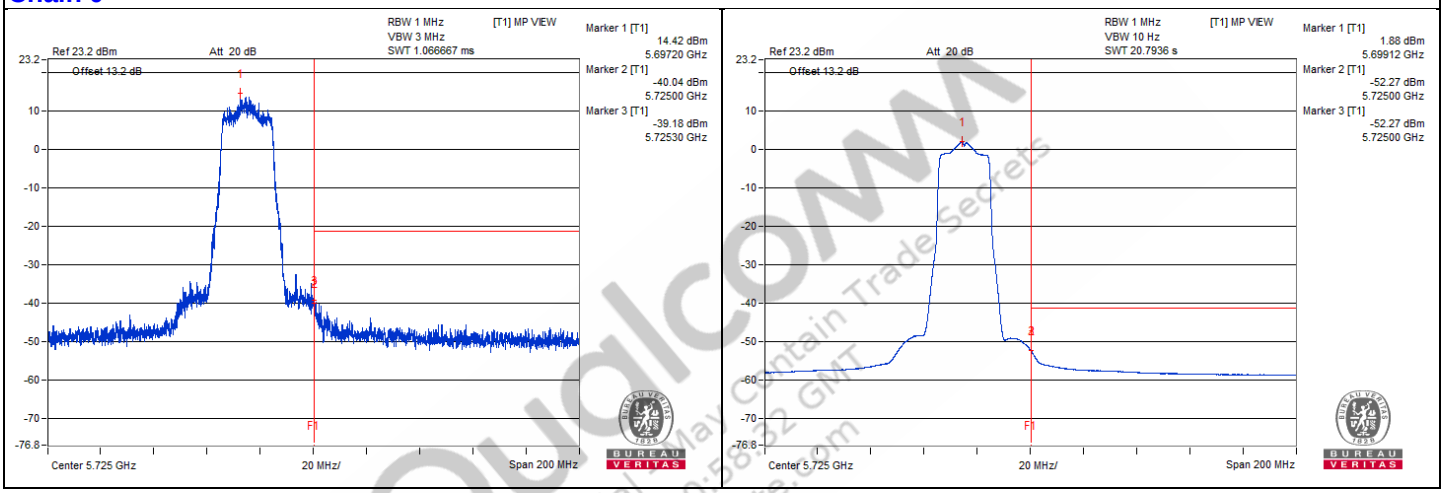

Chain 1

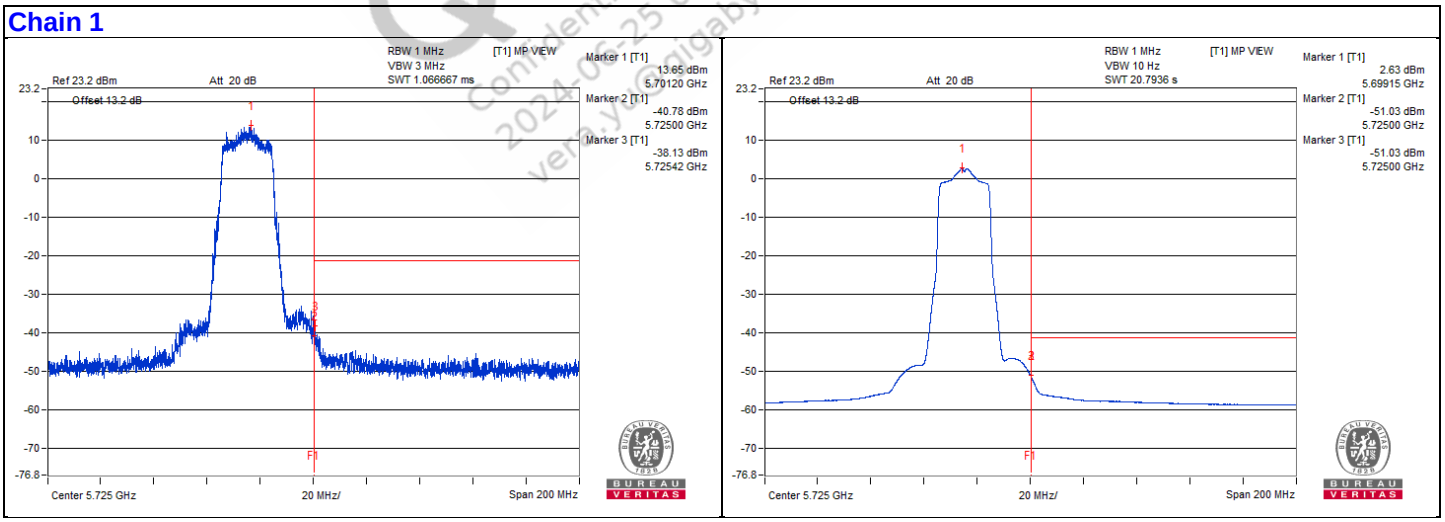

Qualcomm Confidential and Proprietary – Contain Trade Secrets
2024-06-25 00:55:32 GMT
vera.yao@gigabyte.com

802.11be (EHT20) - Channel 144

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3817.18	60.53 PK	74	-13.47	-45.57	-46.28	8.17	-34.73
2	3807.81	50.29 AV	54	-3.71	-56.42	-55.9	8.17	-44.97
3	7617.18	58.92 PK	74	-15.08	-48.28	-46.88	8.17	-36.34
4	7626.56	48.2 AV	54	-5.8	-58.17	-58.31	8.17	-47.06
5	11443.75	59.34 PK	74	-14.66	-47.6	-46.65	8.17	-35.92
6	11420.31	48.52 AV	54	-5.48	-57.73	-58.12	8.17	-46.74
7	#17145.5	49.79 PK	68.2	-18.41	-56.79	-56.51	8.17	-45.47


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

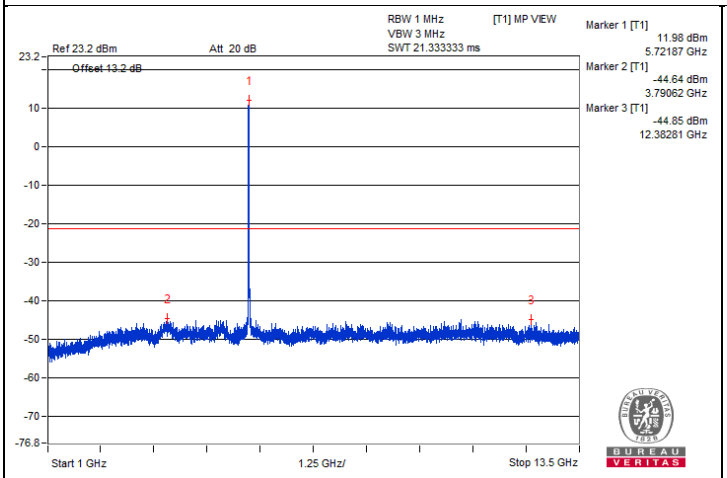


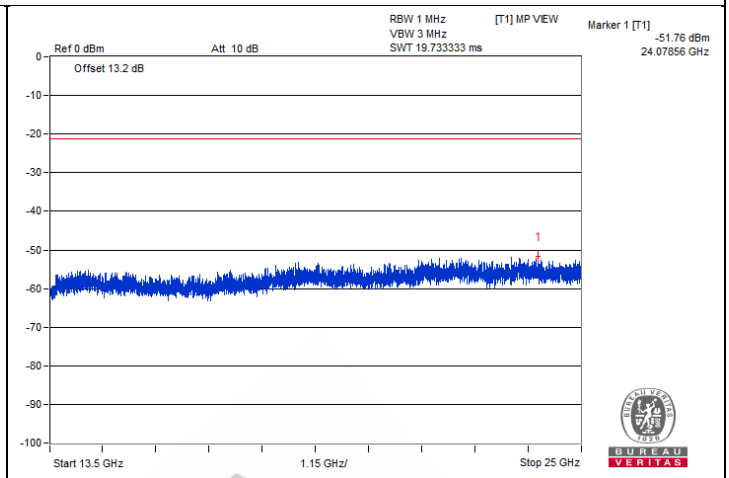

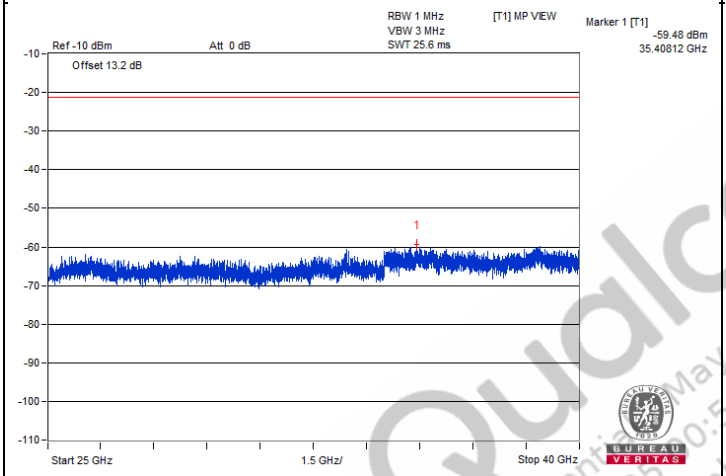

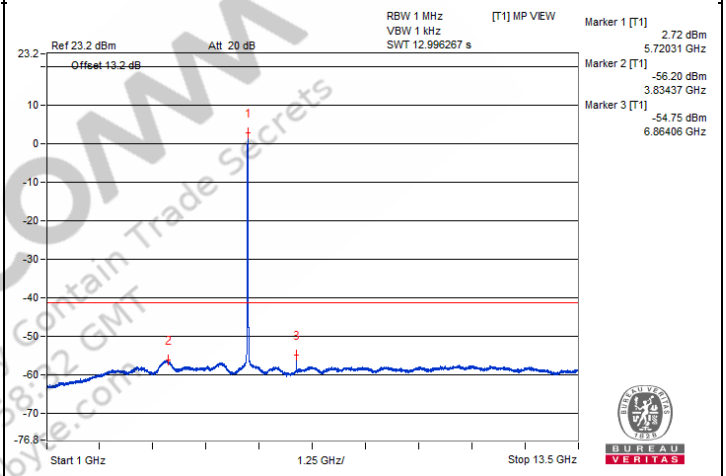


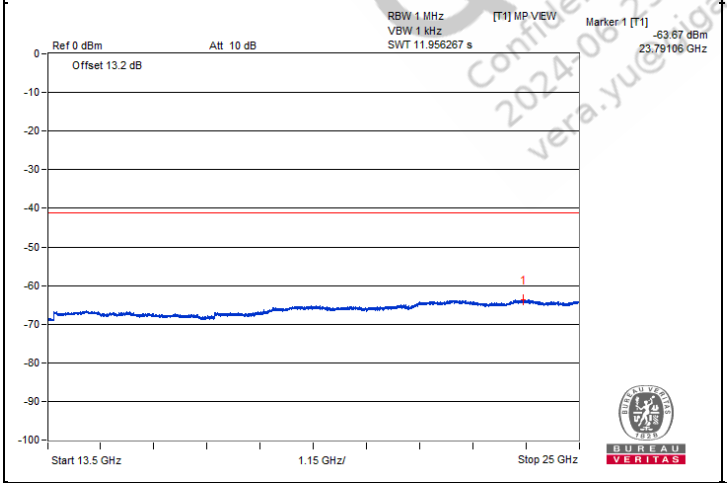


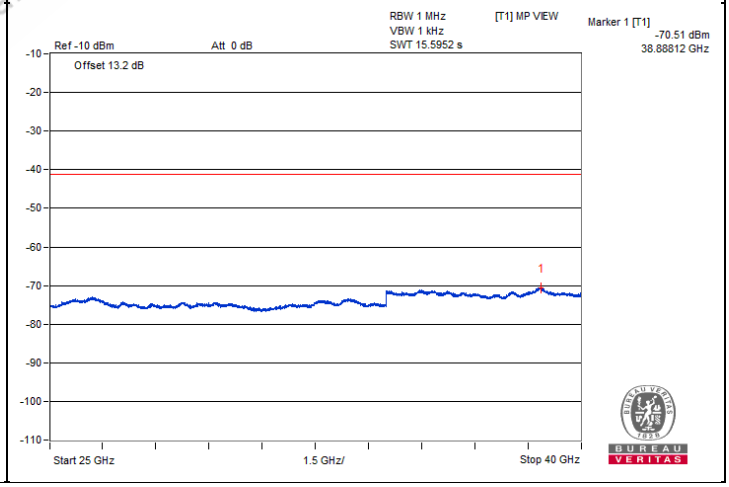



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

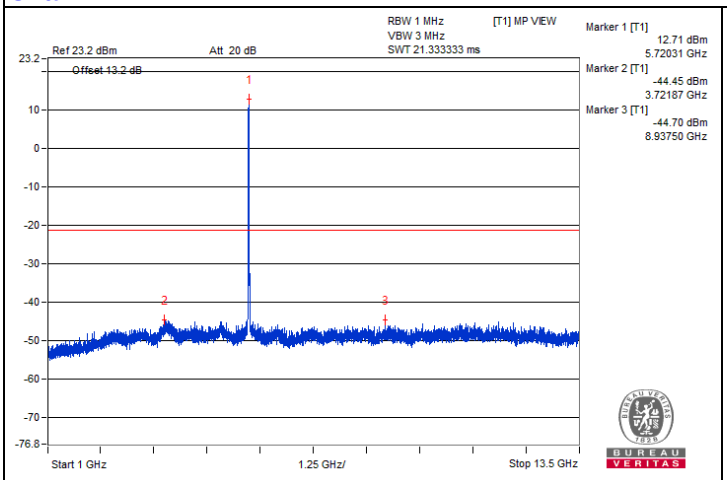


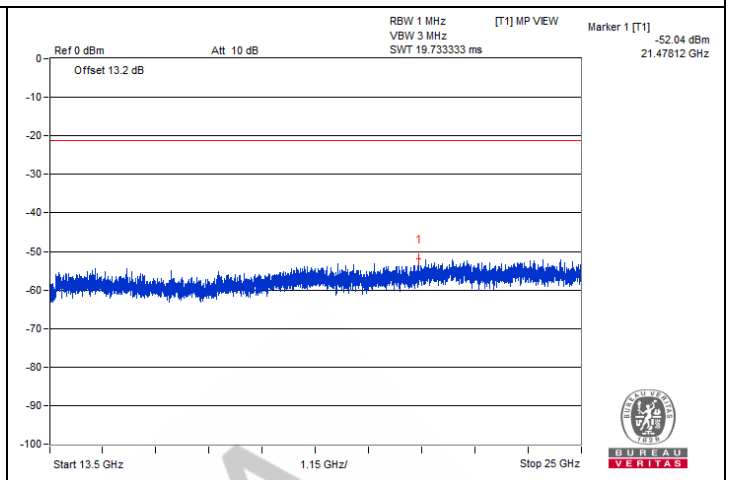

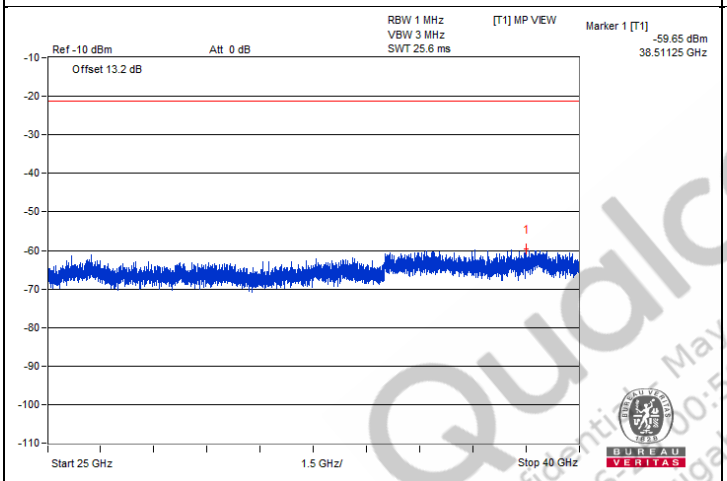

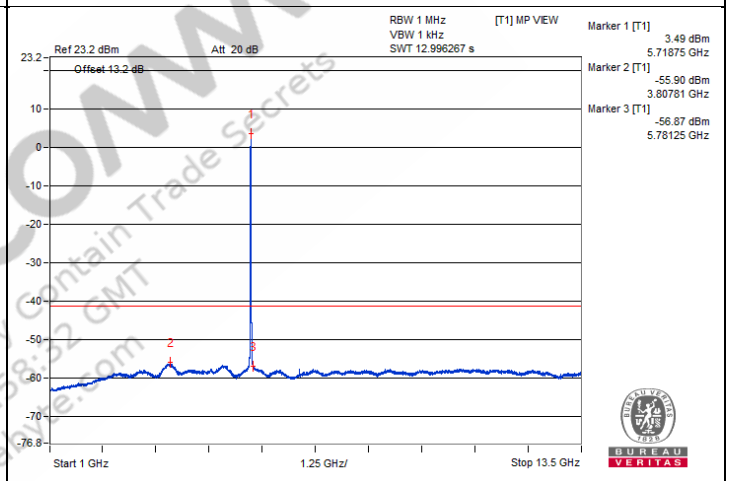

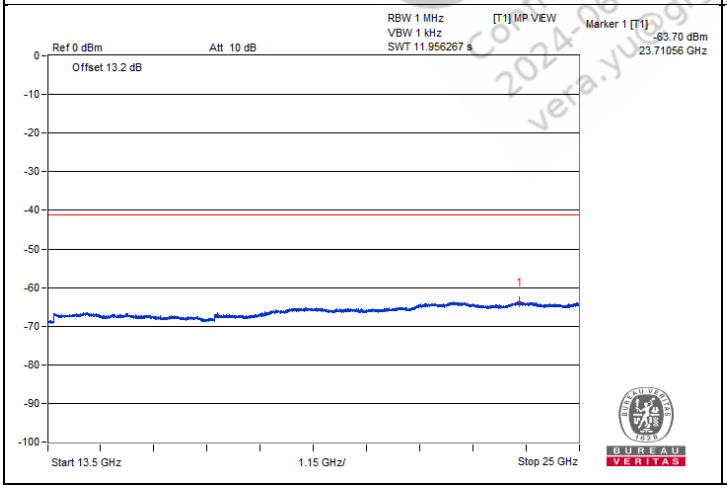

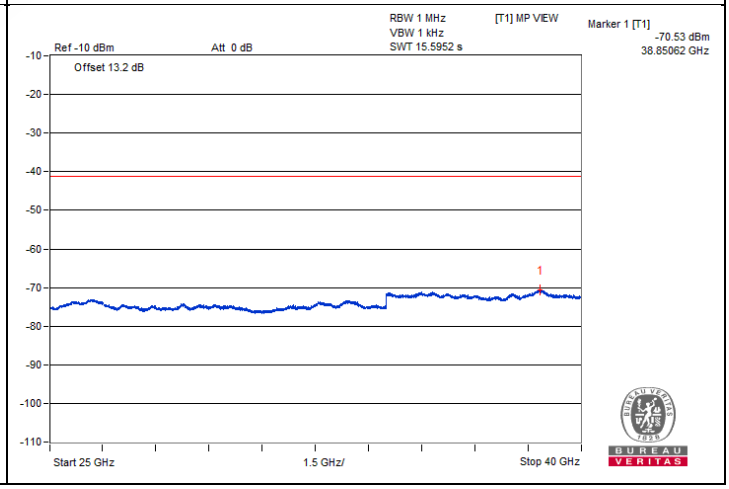

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5880.28	59.27 PK	68.2	-8.93	-47.69	-46.09	7.82	-35.99


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

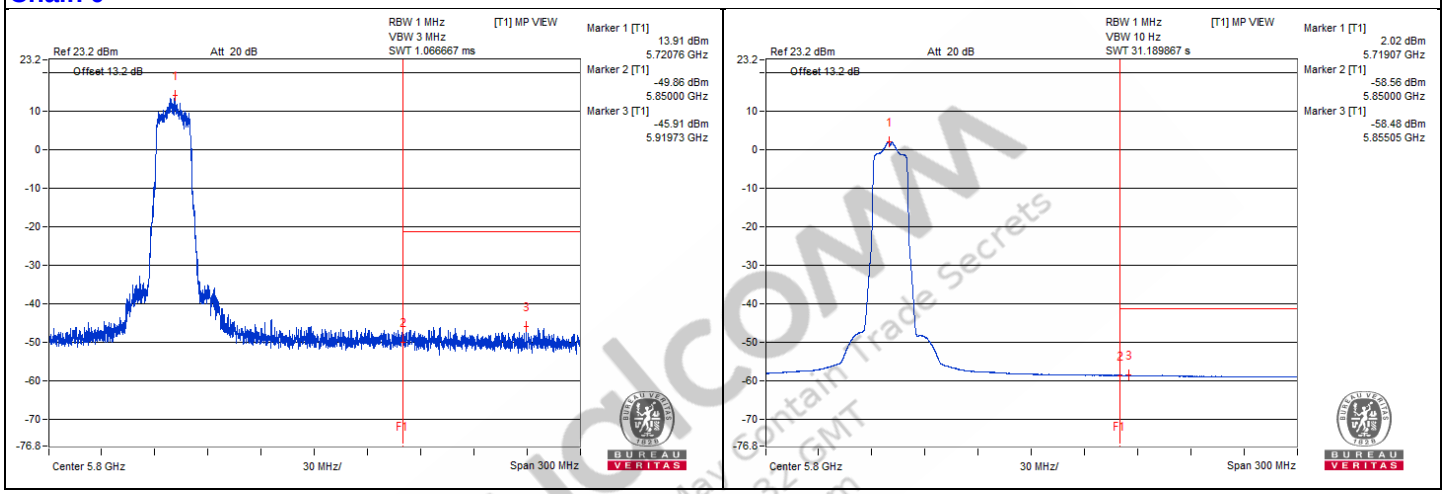

Chain 1

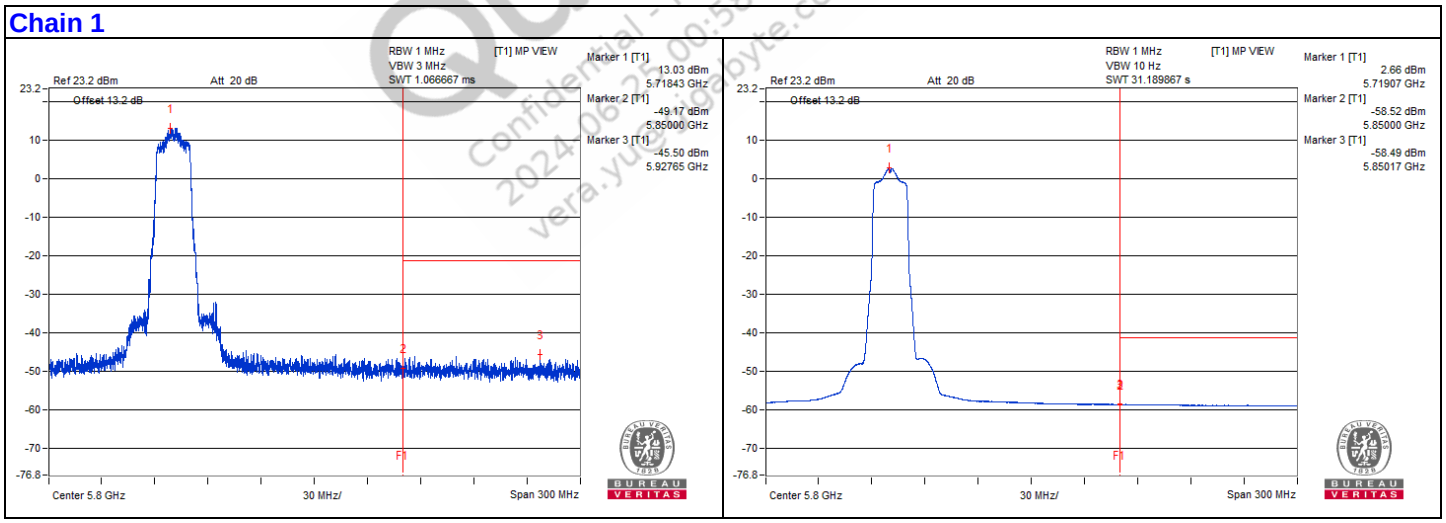

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

802.11be (EHT20) – Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3814.06	60.62 PK	74	-13.38	-45.67	-45.98	8.17	-34.64
2	3818.75	50.1 AV	54	-3.9	-56.2	-56.48	8.17	-45.16
3	7678.12	59.87 PK	74	-14.13	-45.33	-48.32	8.17	-35.39
4	7640.62	48.1 AV	54	-5.9	-58.27	-58.41	8.17	-47.16
5	11506.25	59.59 PK	74	-14.41	-46.98	-46.73	8.17	-35.67
6	11493.75	48.74 AV	54	-5.26	-57.69	-57.71	8.17	-46.52
7	#17234.62	49.52 PK	68.2	-18.68	-57.78	-56.21	8.17	-45.74


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

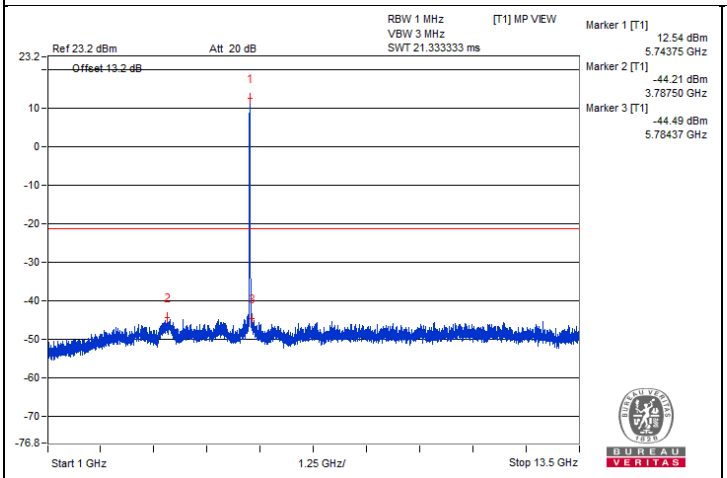


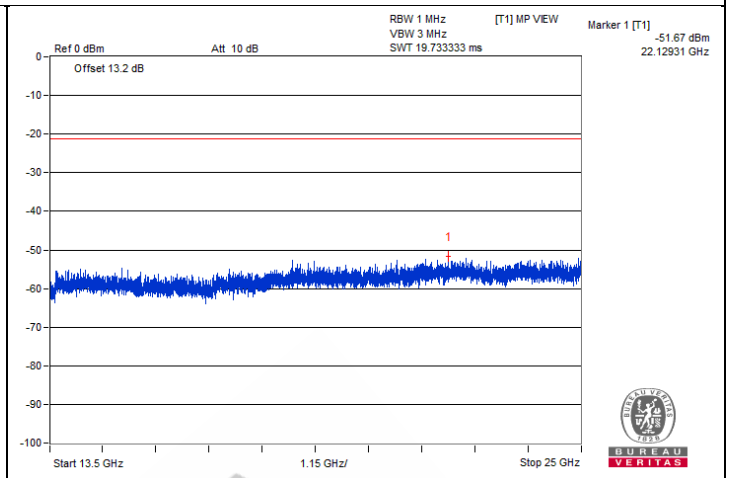

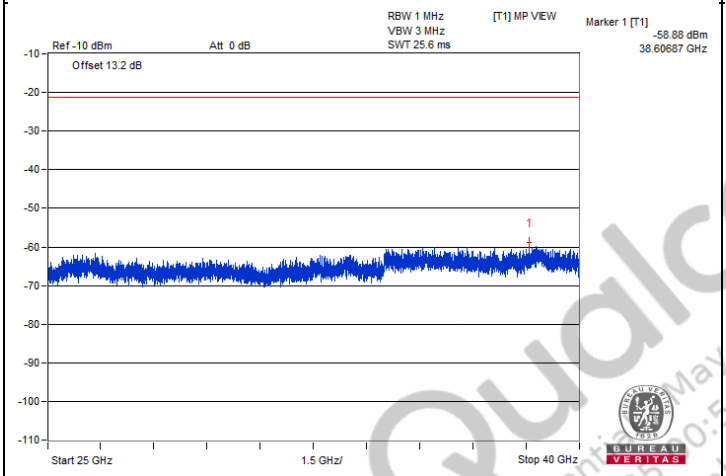

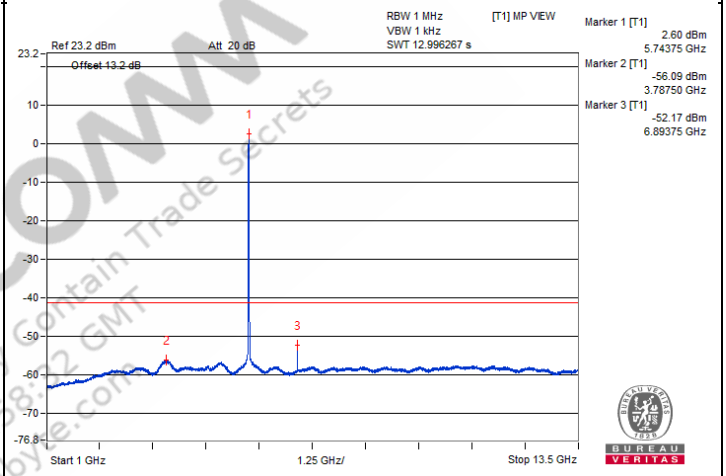


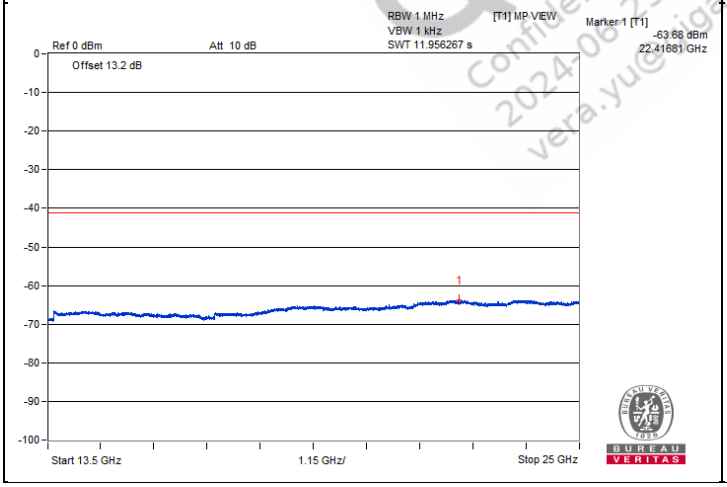


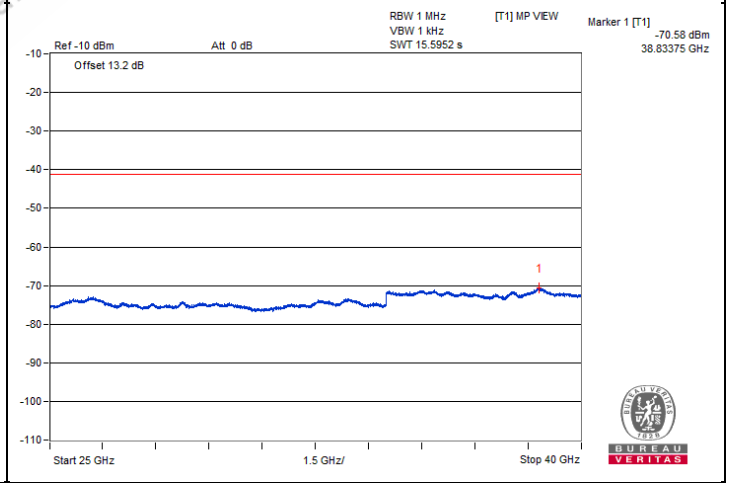



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gabyte.com


Chain 1

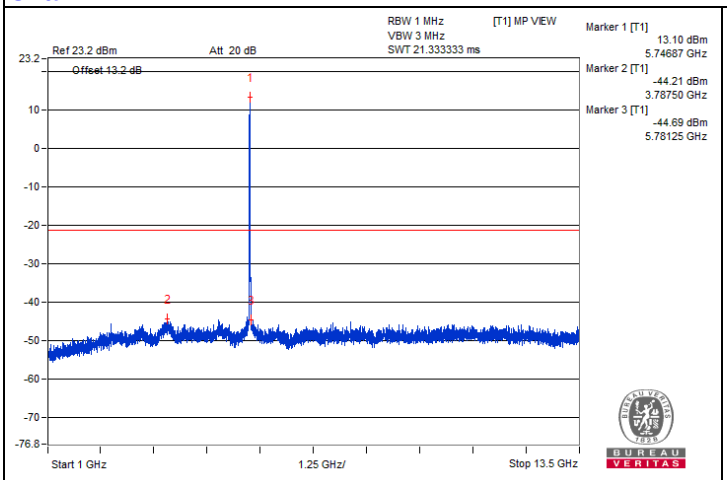


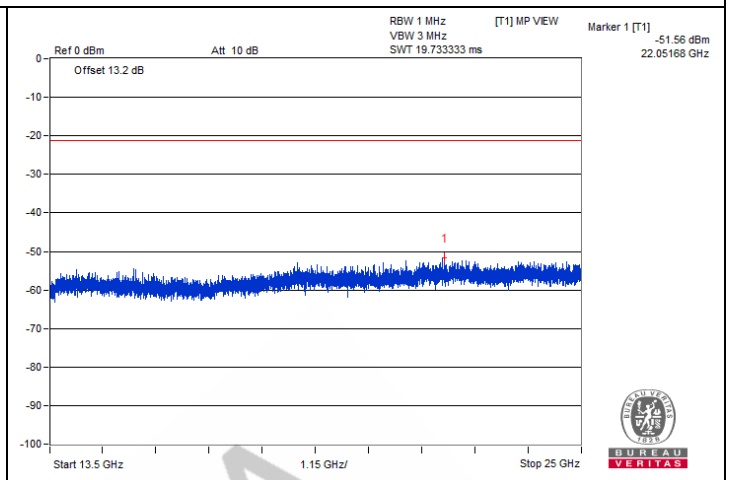

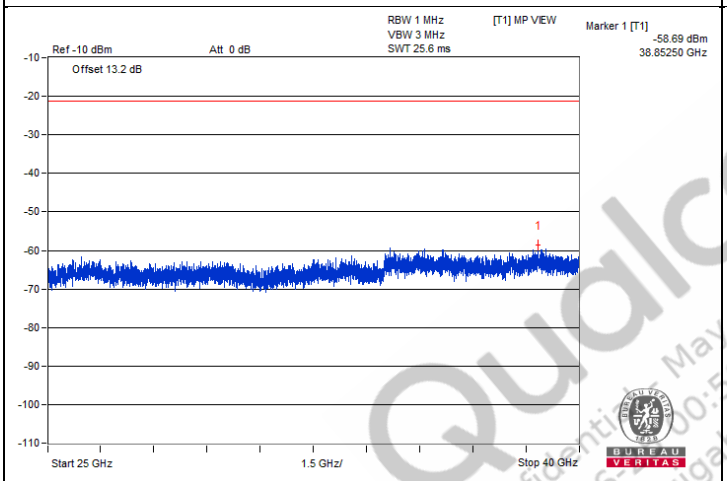

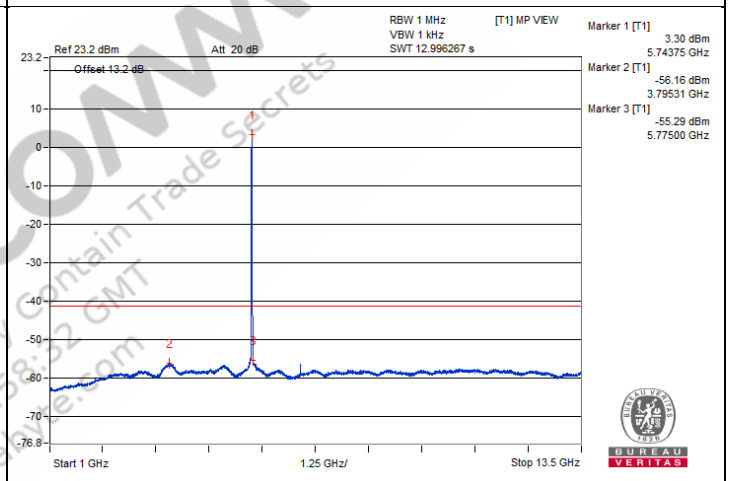

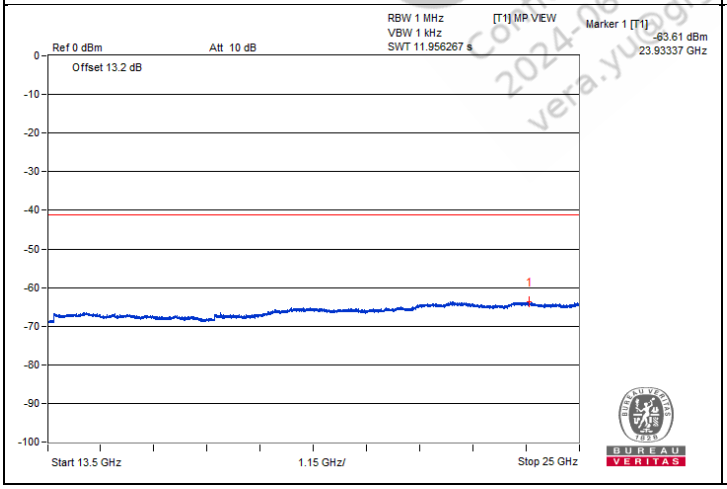


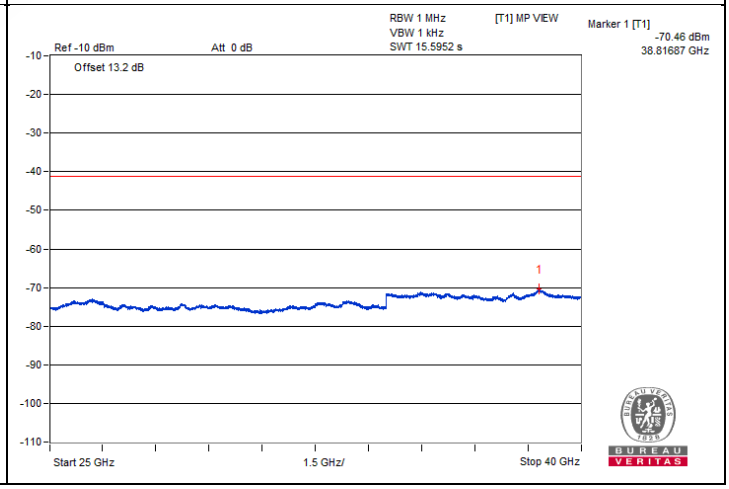

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

Chain 0

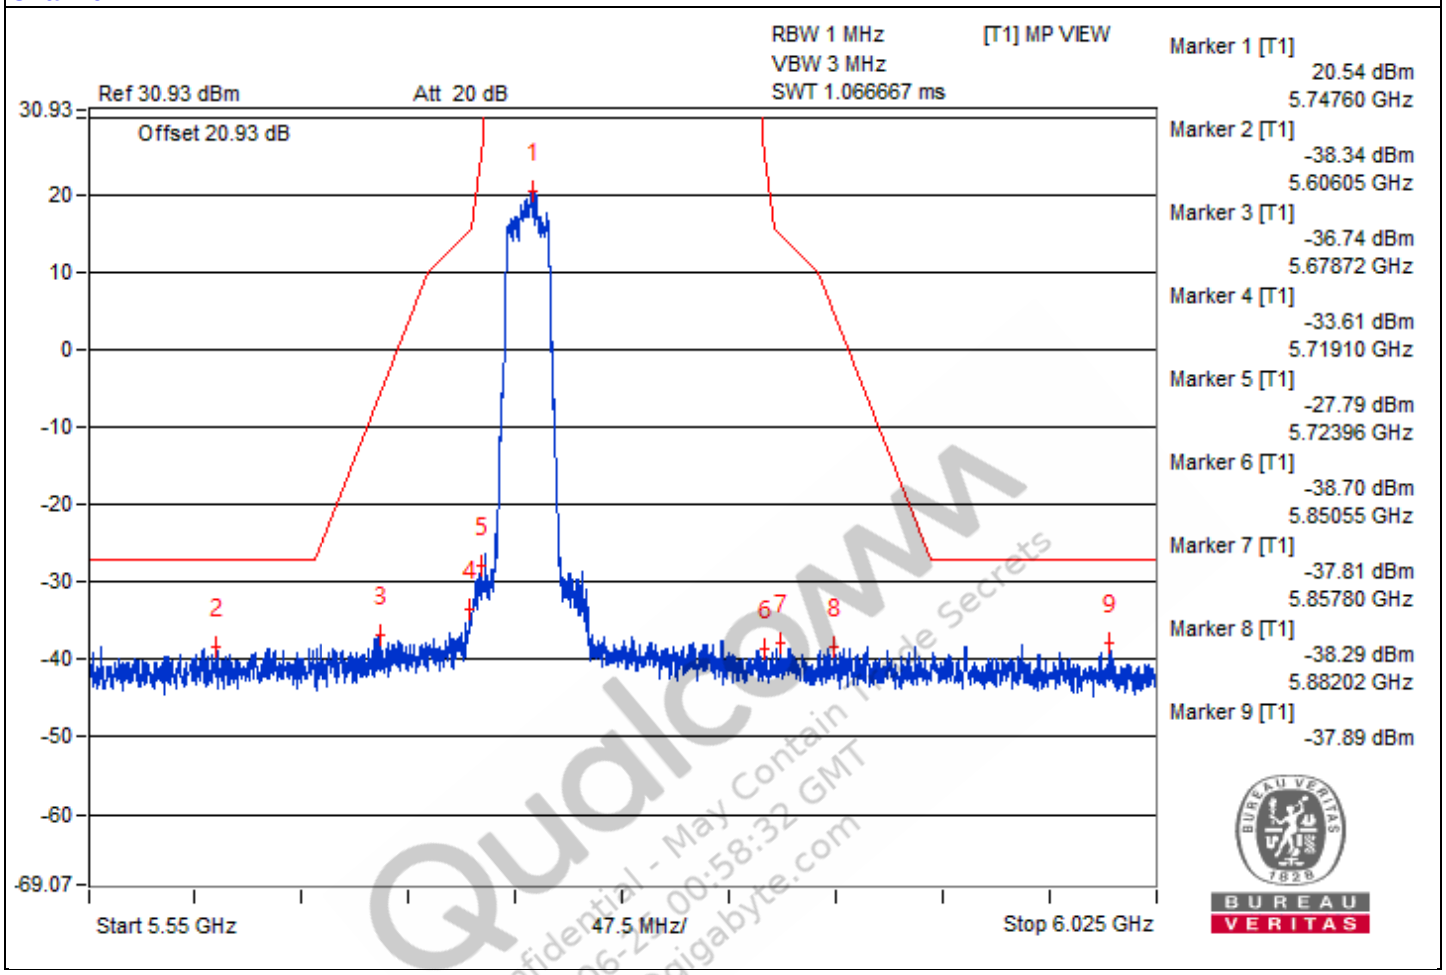

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

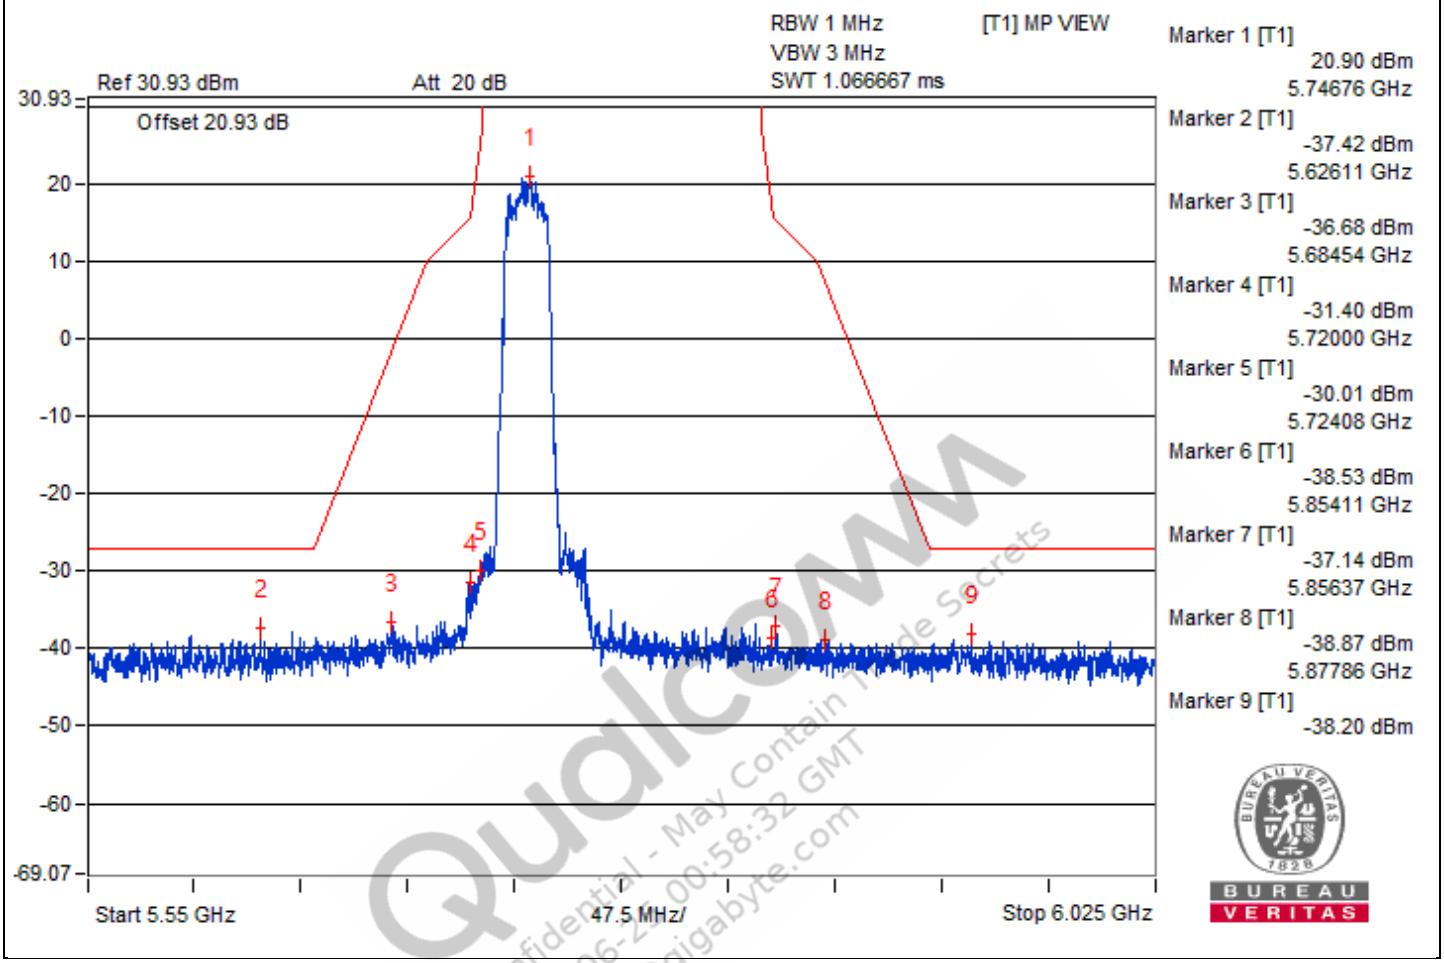

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT20) – Channel 157

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3868.75	60.1 PK	74	-13.9	-46.25	-46.43	8.17	-35.16
2	3837.5	49.97 AV	54	-4.03	-56.29	-56.65	8.17	-45.29
3	7710.93	58.83 PK	74	-15.17	-49.49	-46.31	8.17	-36.43
4	7693.75	48.23 AV	54	-5.77	-58.26	-58.17	8.17	-47.03
5	11567.18	59.93 PK	74	-14.07	-45.88	-47.24	8.17	-35.33
6	11575	48.45 AV	54	-5.55	-57.64	-58.38	8.17	-46.81
7	#17371.18	49.01 PK	68.2	-19.19	-57.5	-57.36	8.17	-46.25


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

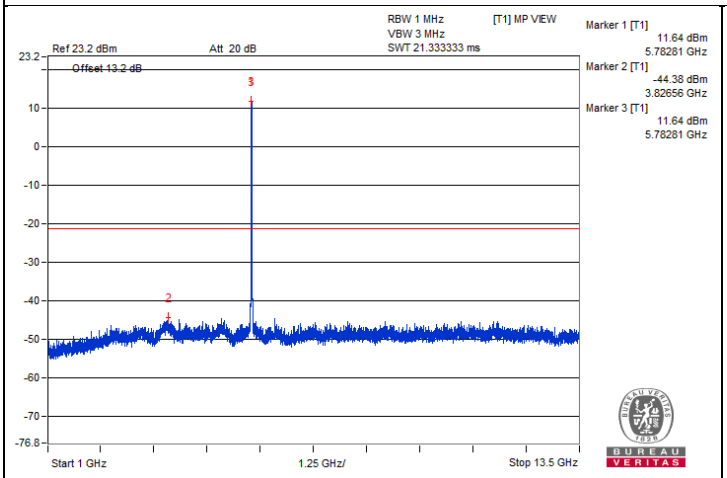


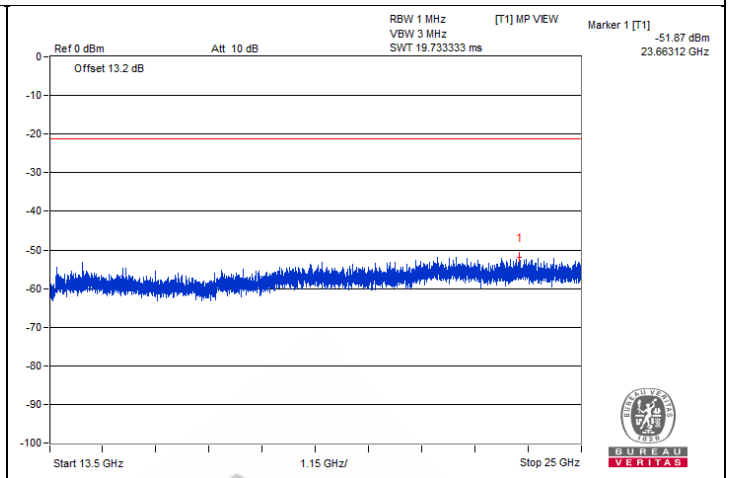

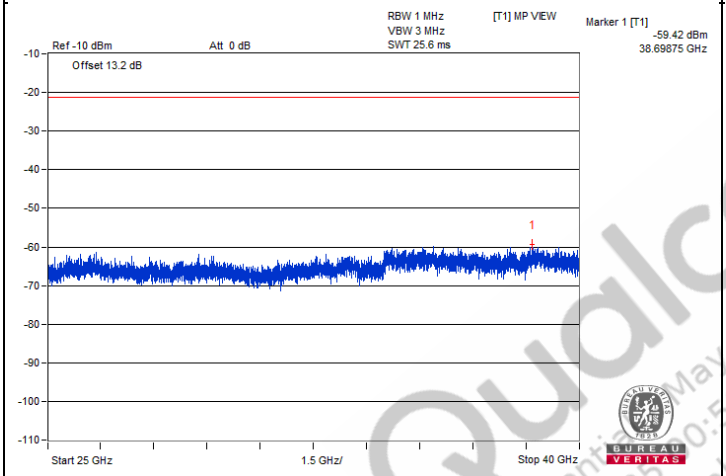

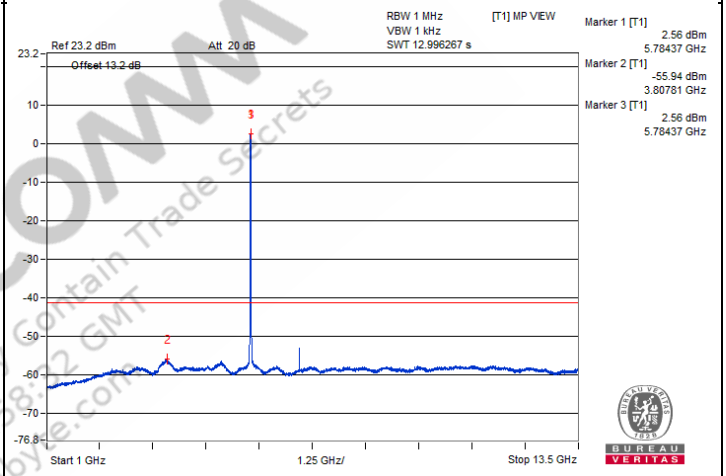


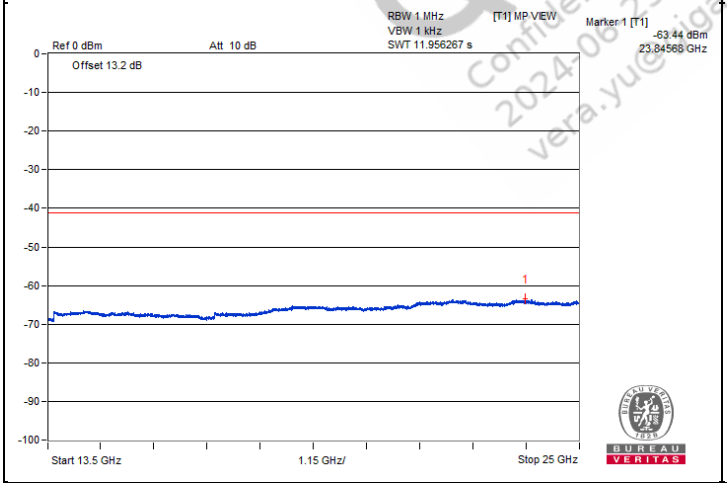


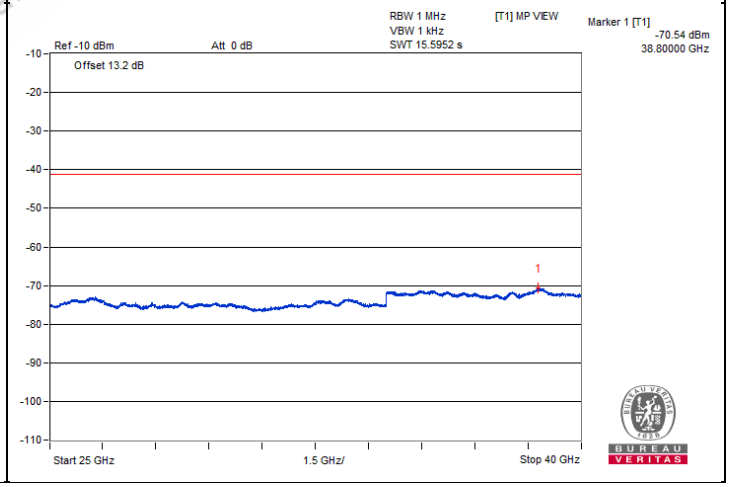



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

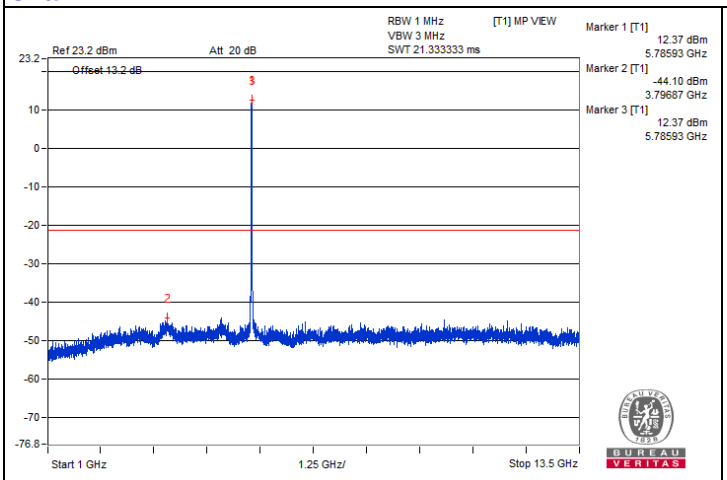


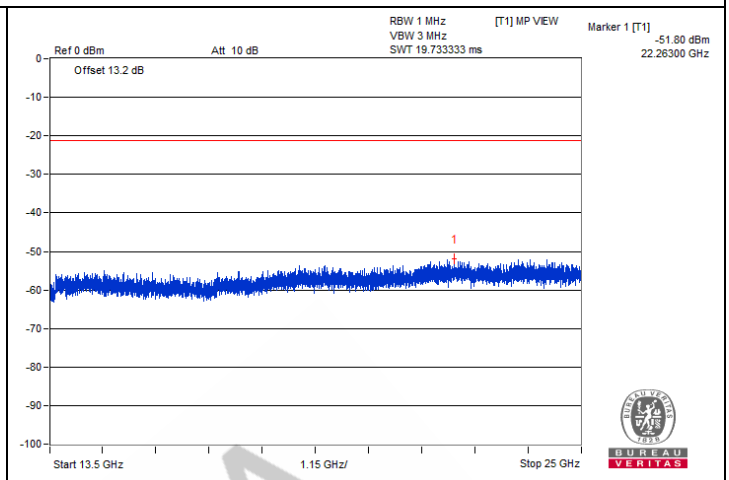

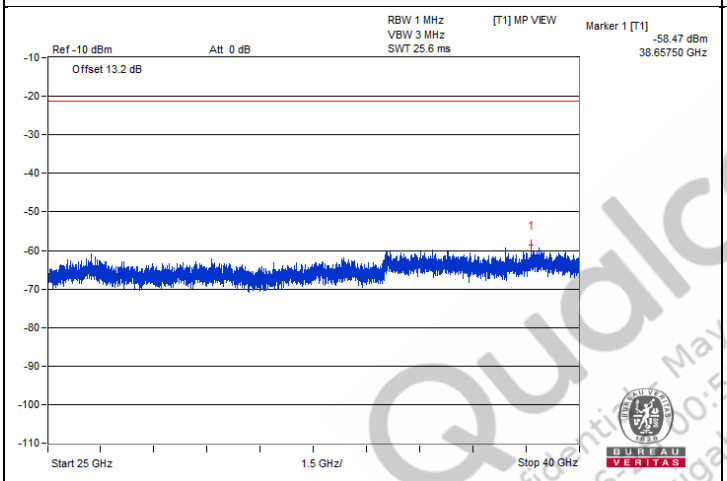

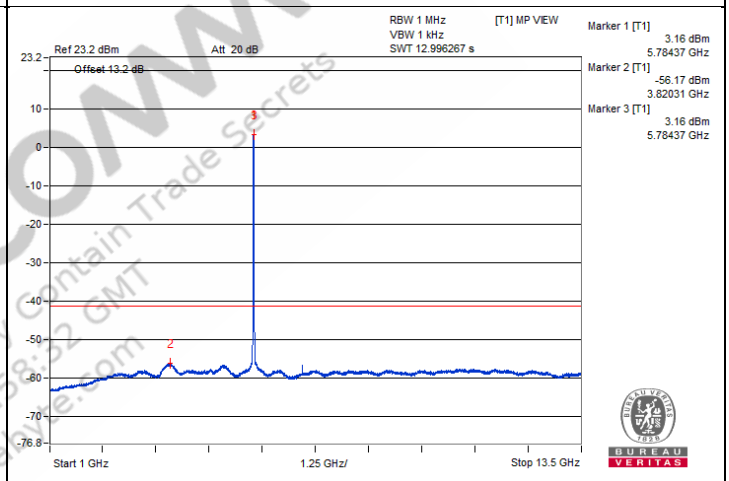

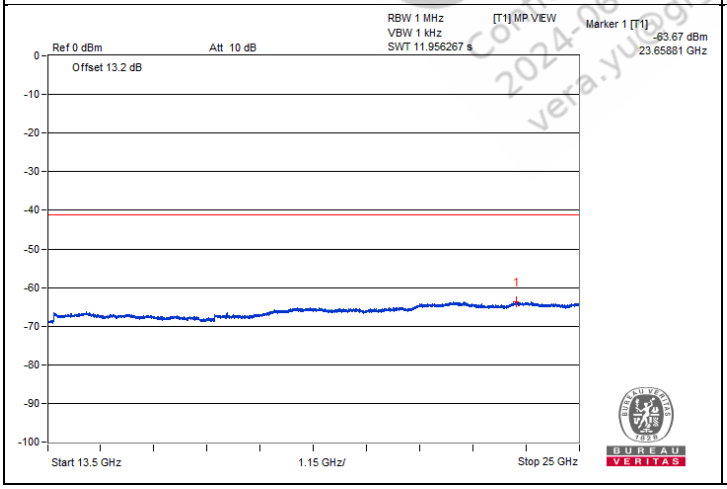


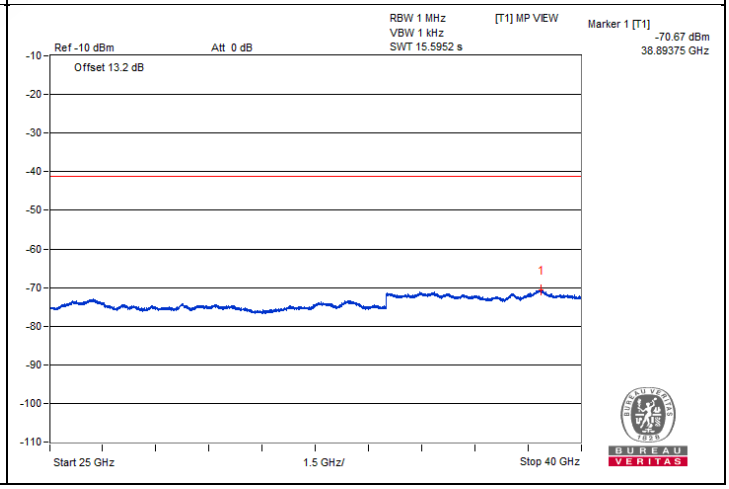

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@bgatvre.com


Bandedge table

Chain 0

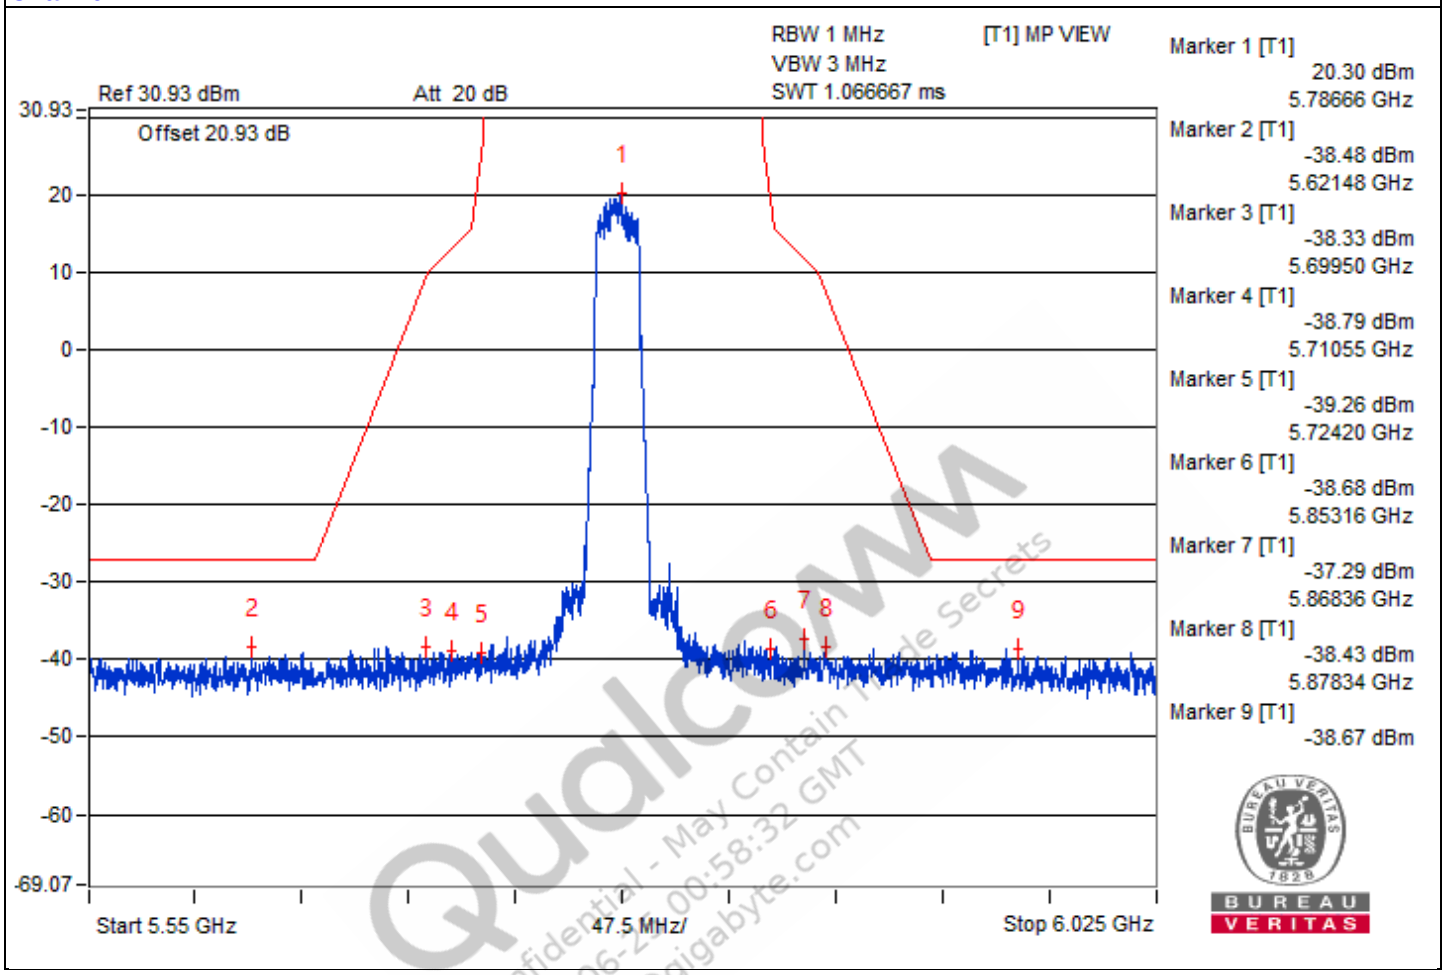

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

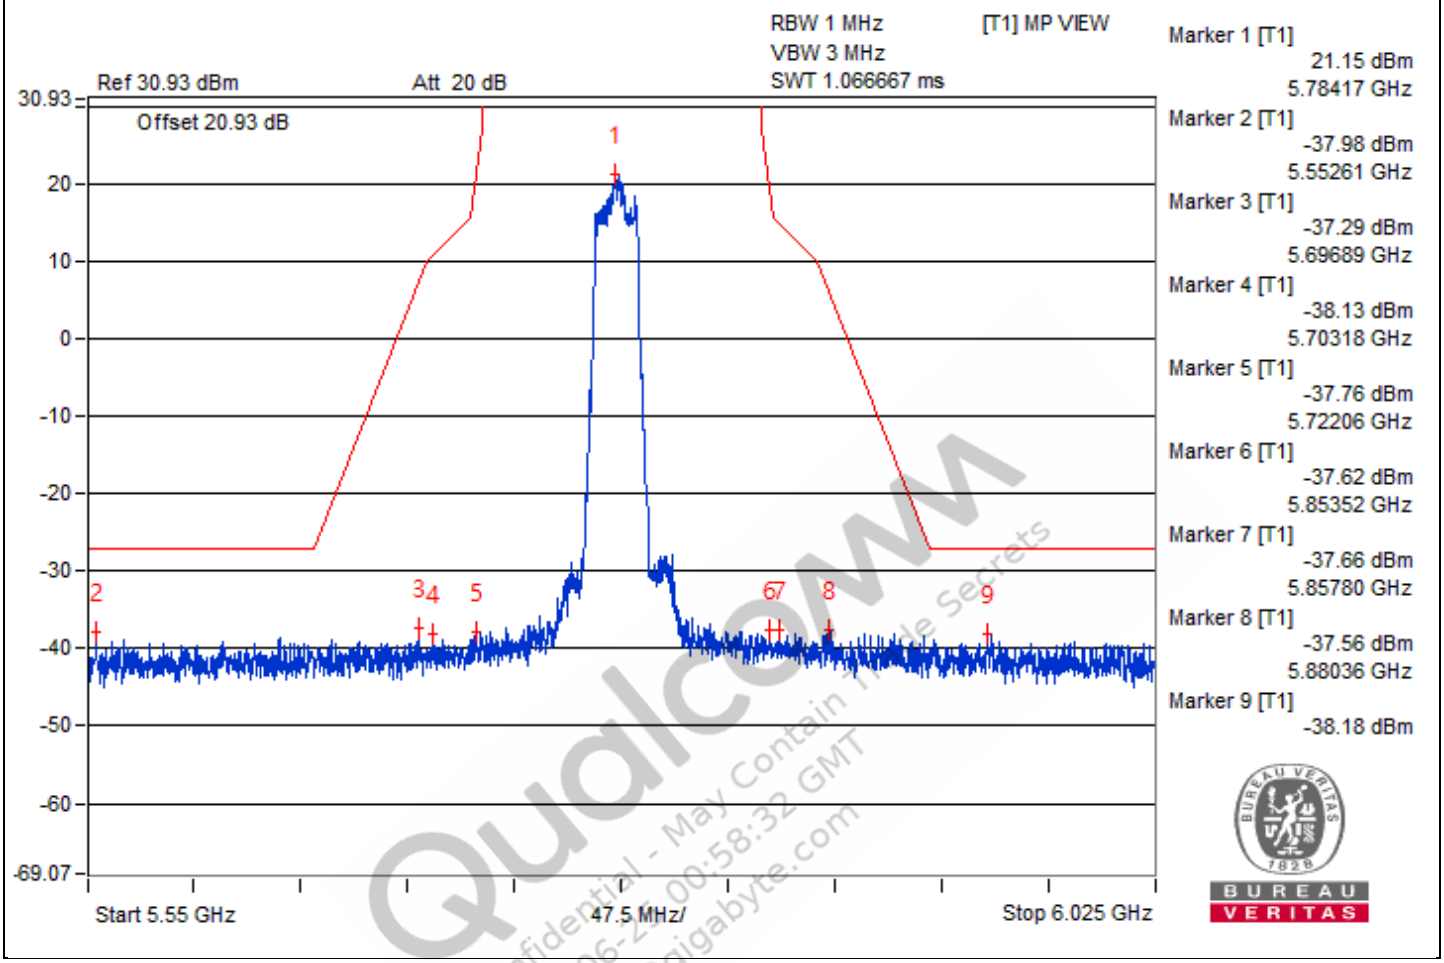

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT20) – Channel 165

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3864.06	60.52 PK	74	-13.48	-45.8	-46.04	8.17	-34.74
2	3864.06	49.65 AV	54	-4.35	-56.81	-56.78	8.17	-45.61
3	#7767.18	59.83 PK	68.2	-8.37	-46.9	-46.34	8.17	-35.43
4	7750	48.14 AV	54	-5.86	-58.37	-58.23	8.17	-47.12
5	11657.81	59.35 PK	74	-14.65	-49.43	-45.58	8.17	-35.91
6	11645.31	48.32 AV	54	-5.68	-58.21	-58.04	8.17	-46.94
7	#17474.68	49.55 PK	68.2	-18.65	-56.41	-57.42	8.17	-45.71


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

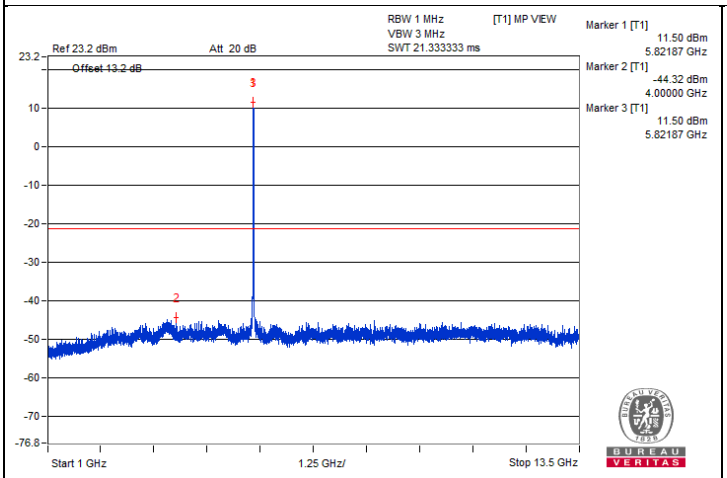


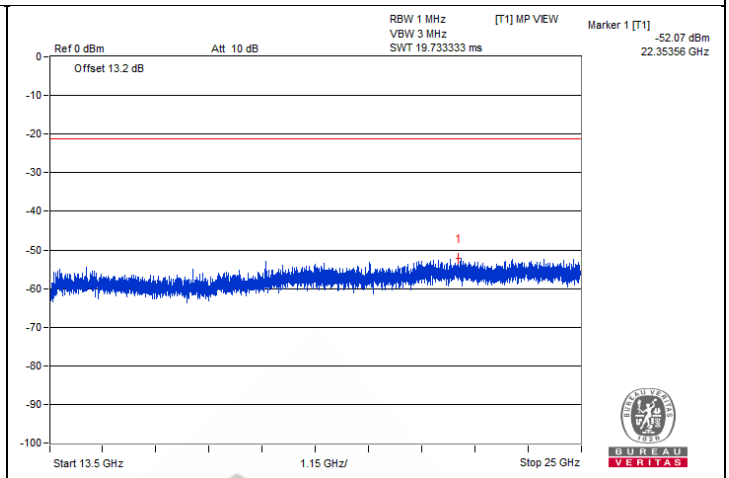

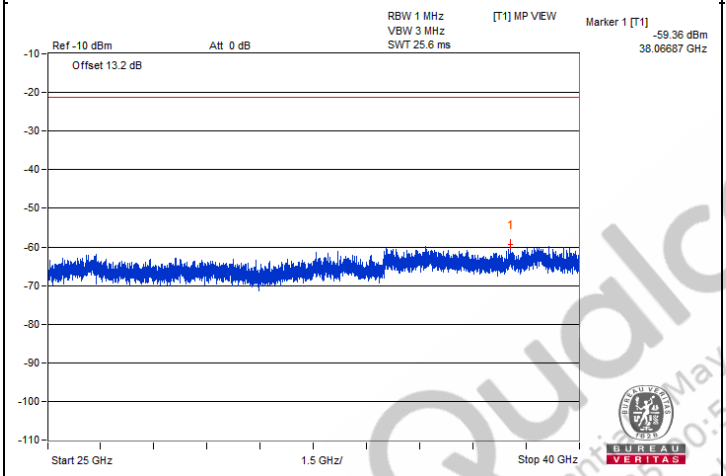

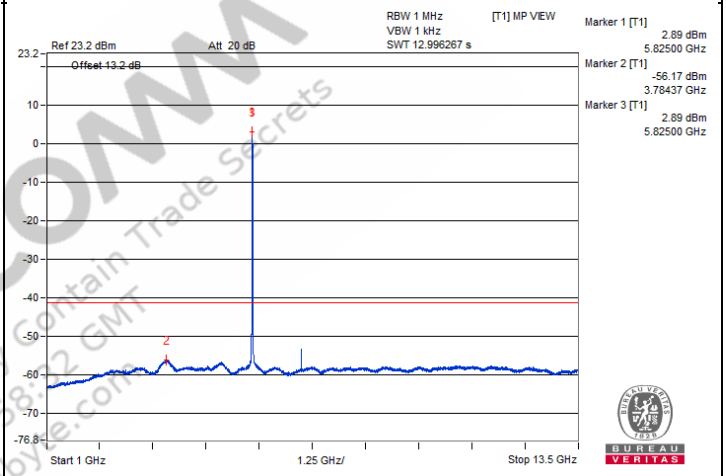


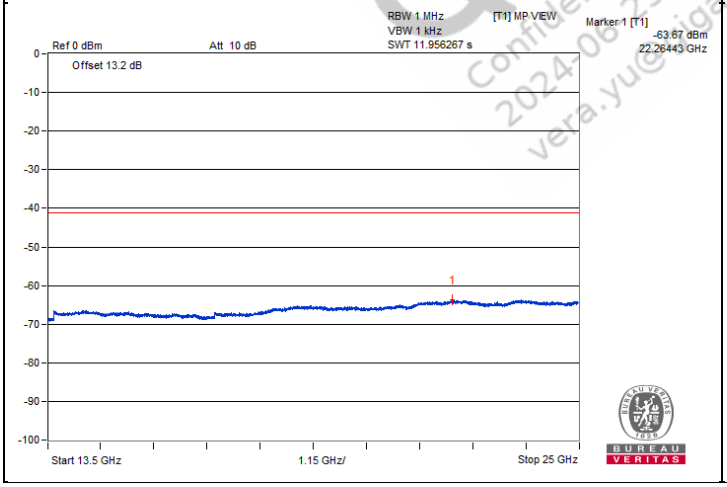


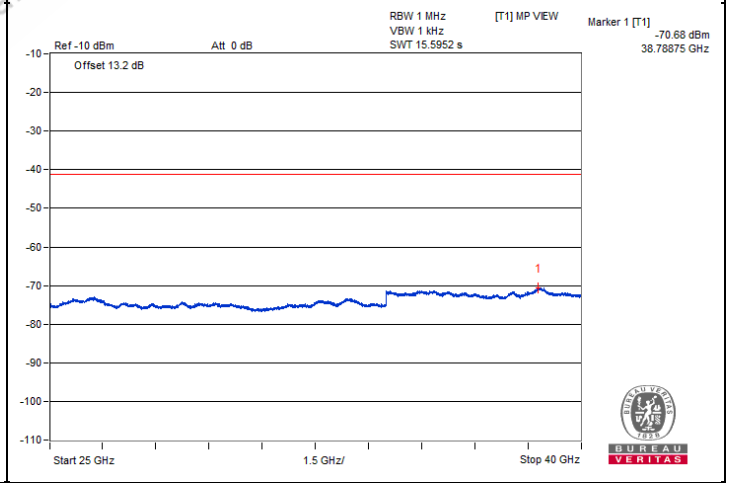



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

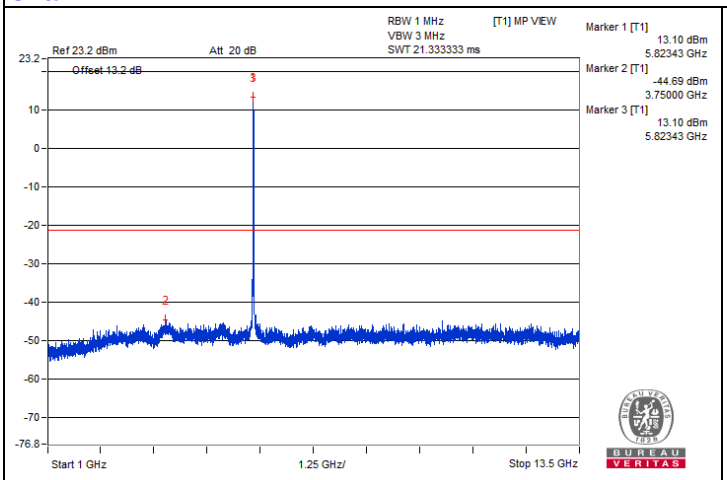


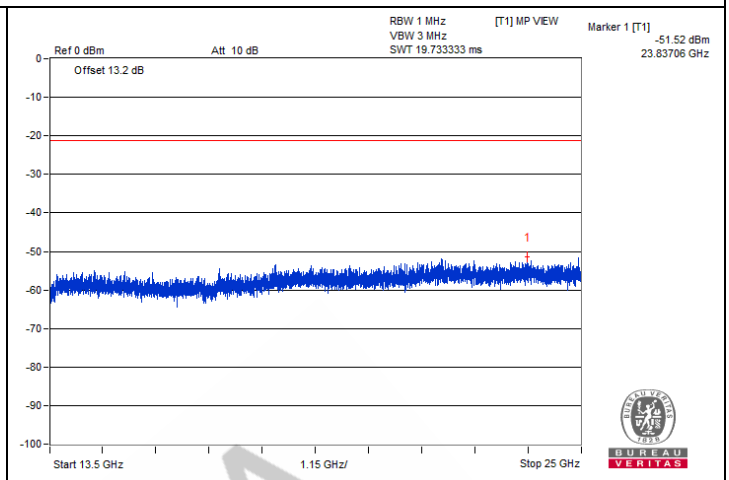

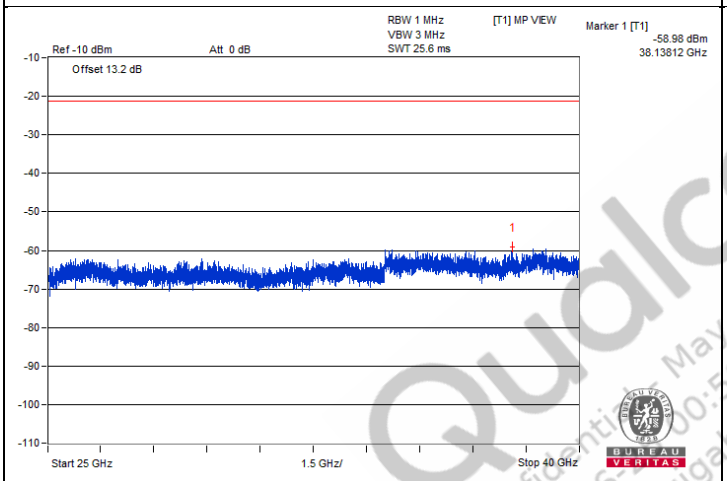

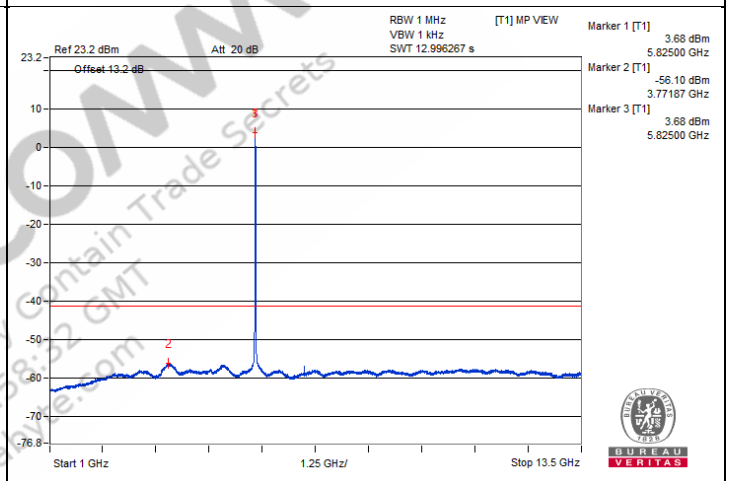

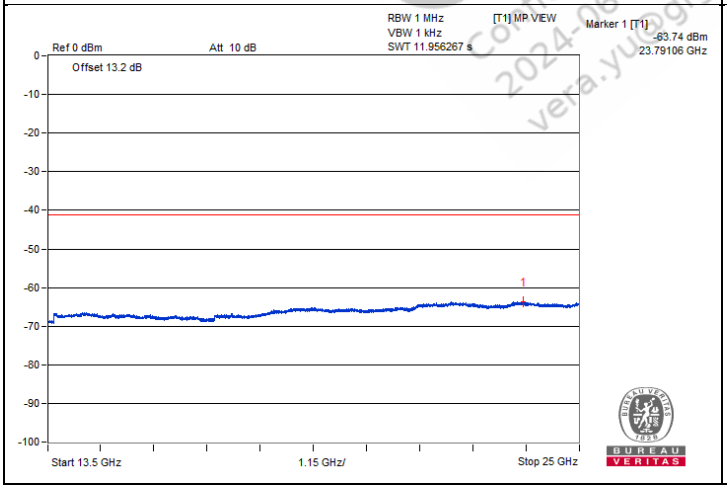


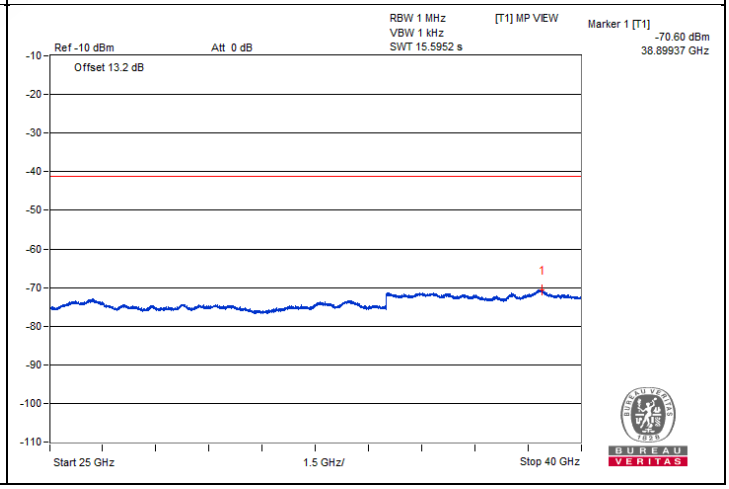

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@bgatvre.com


Bandedge table

Chain 0

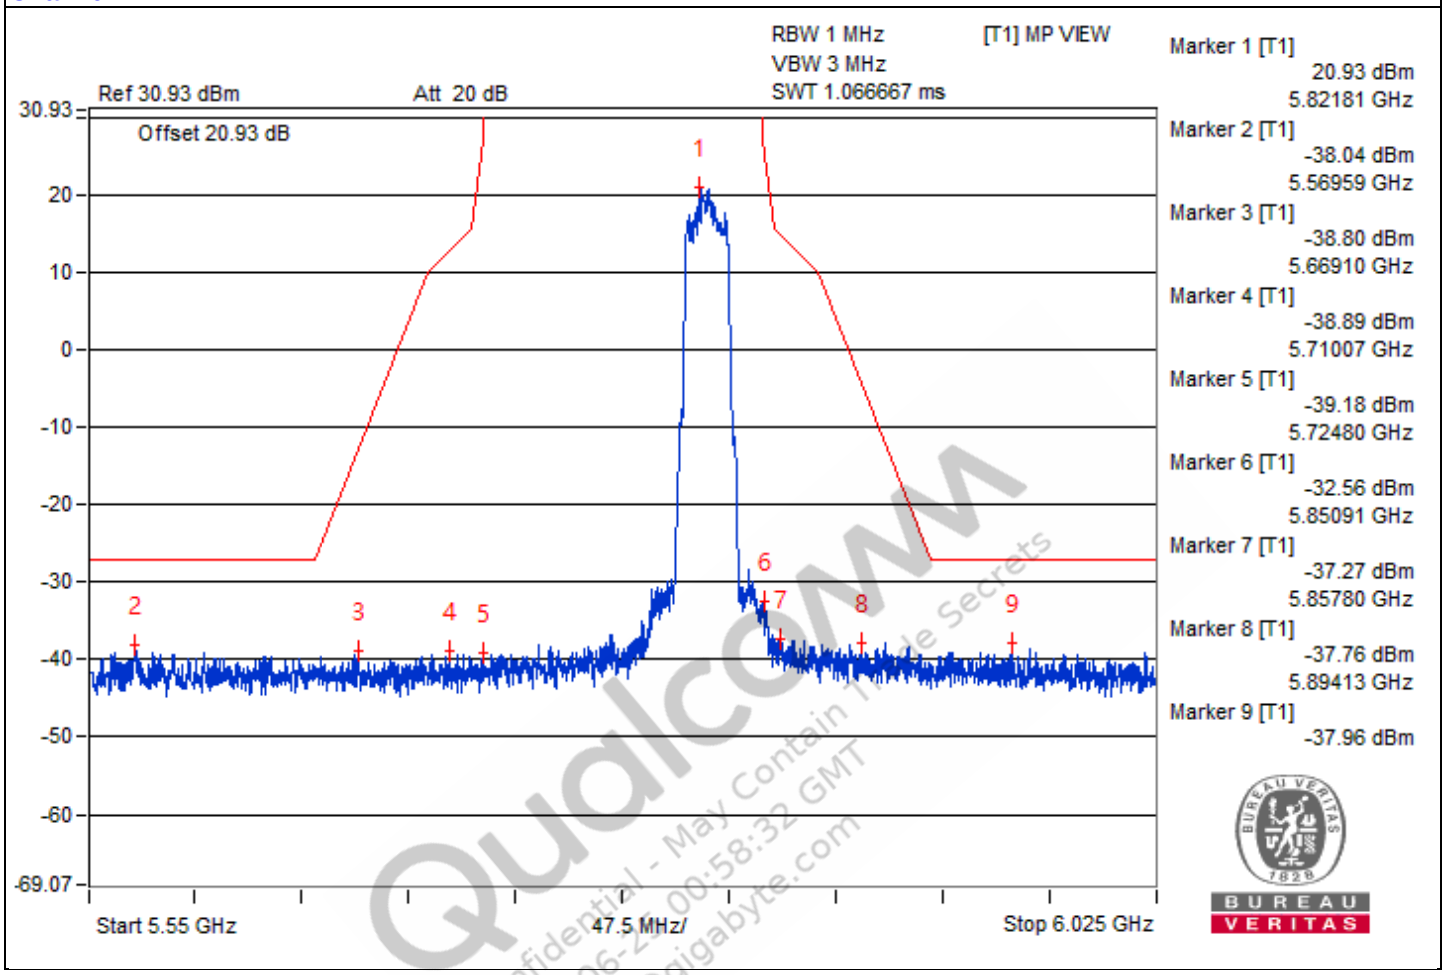

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

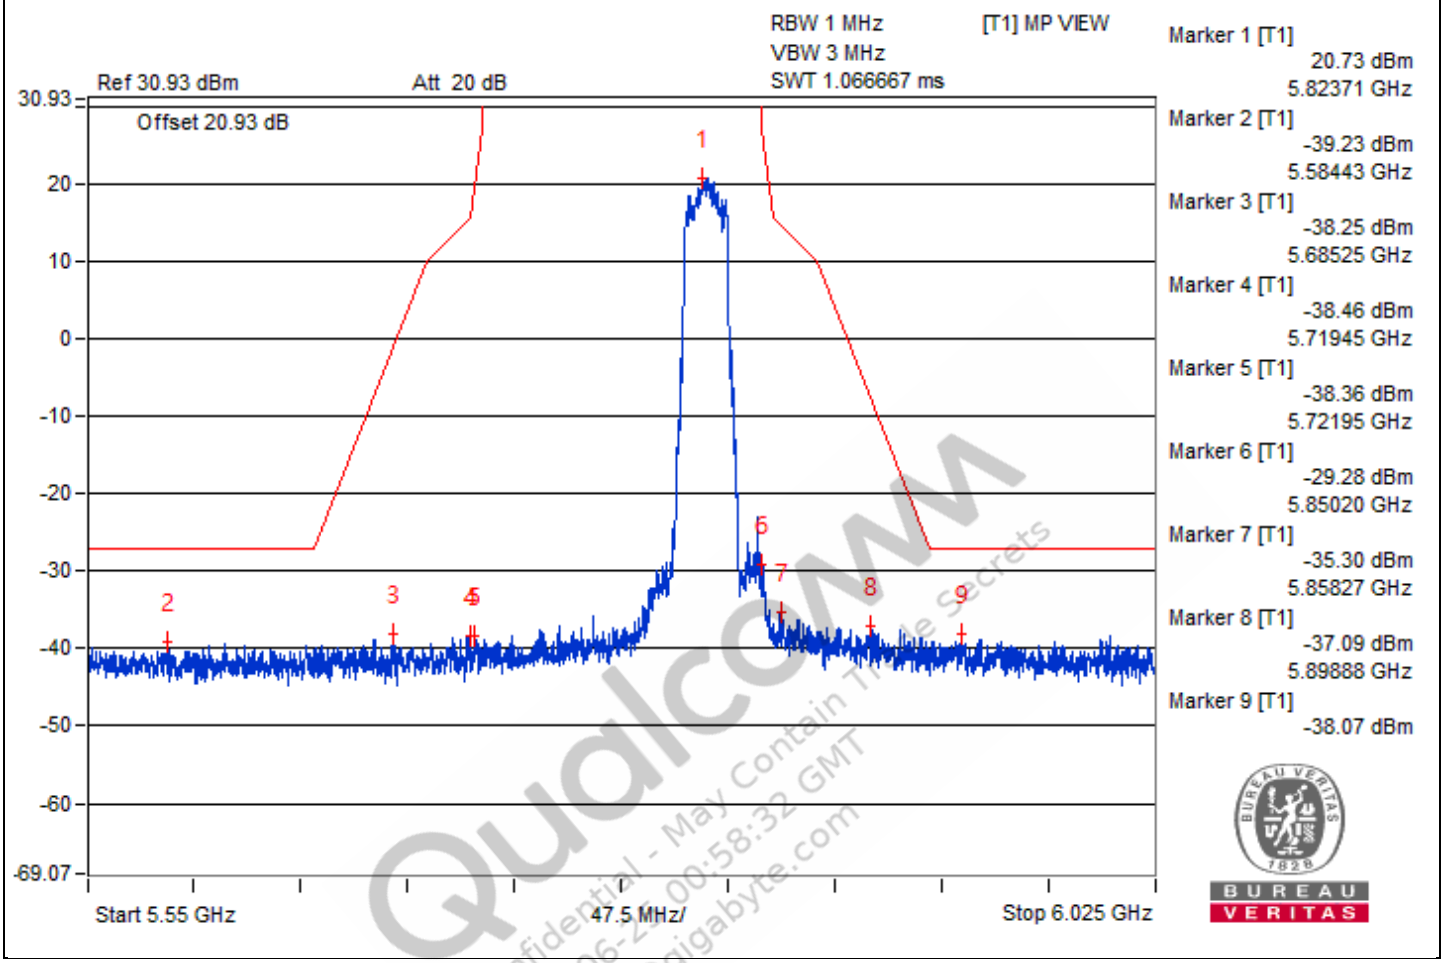

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT40) - Channel 38

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3450	57.69 PK	68.2	-10.51	-50.93	-47.3	8.17	-37.57
2	#6937.5	58.42 PK	68.2	-9.78	-48.83	-47.34	8.17	-36.84
3	#10360.93	59.51 PK	68.2	-8.69	-47.27	-46.62	8.17	-35.75
4	15581.5	48.82 PK	74	-25.18	-58.01	-57.27	8.17	-46.44
5	15588.68	39.01 AV	54	-14.99	-67.49	-67.37	8.17	-56.25


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

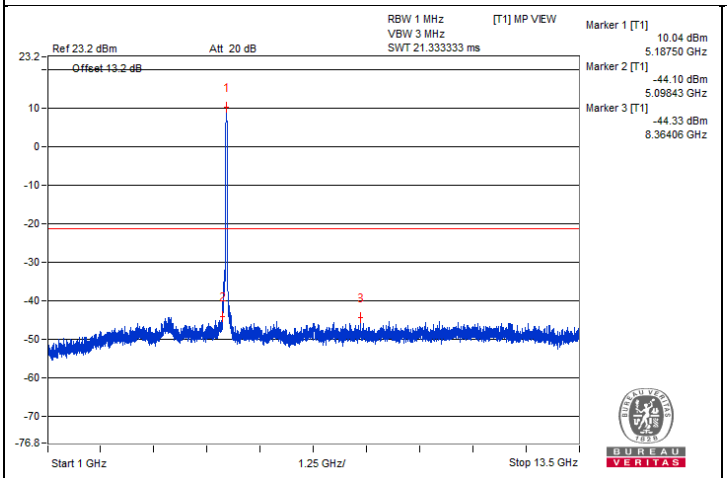


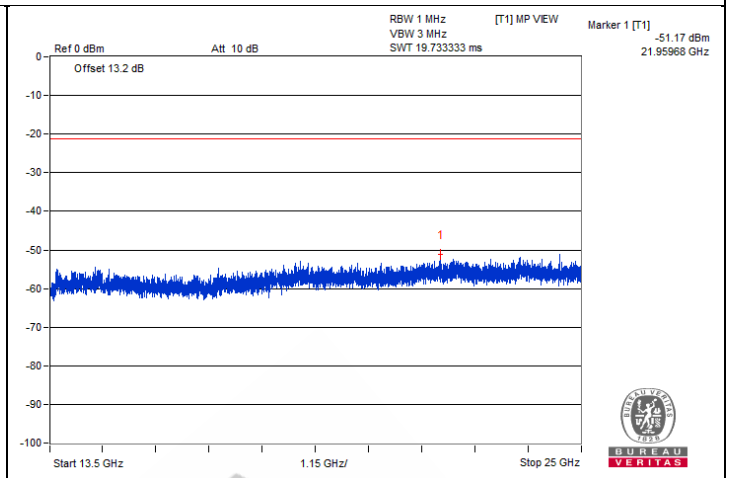

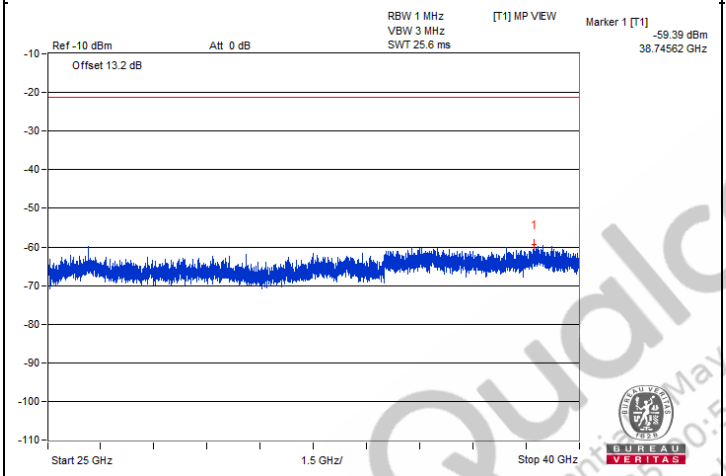

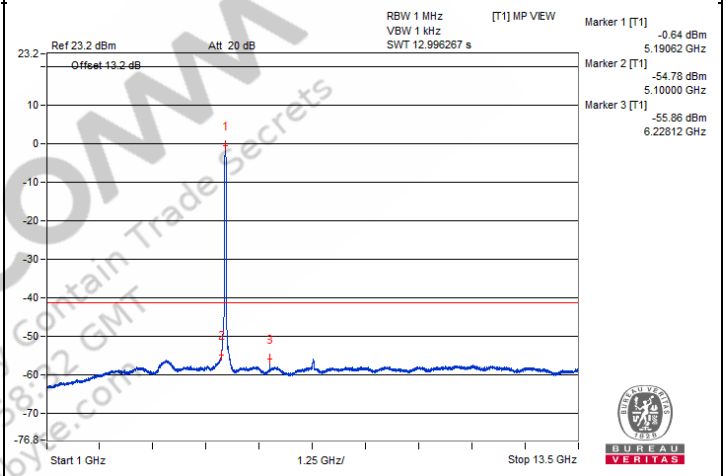


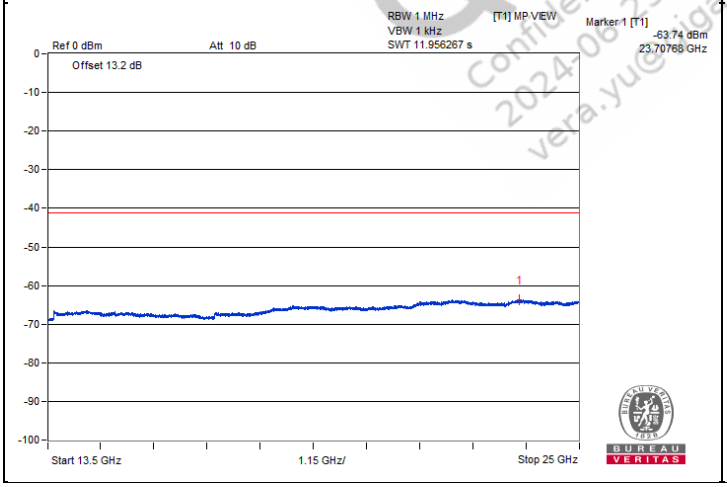


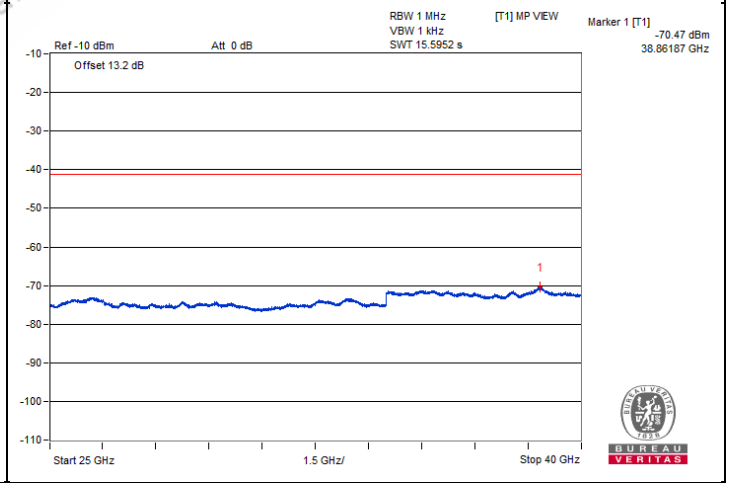



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:02 GMT
vera.yue@gigabyte.com


Chain 1

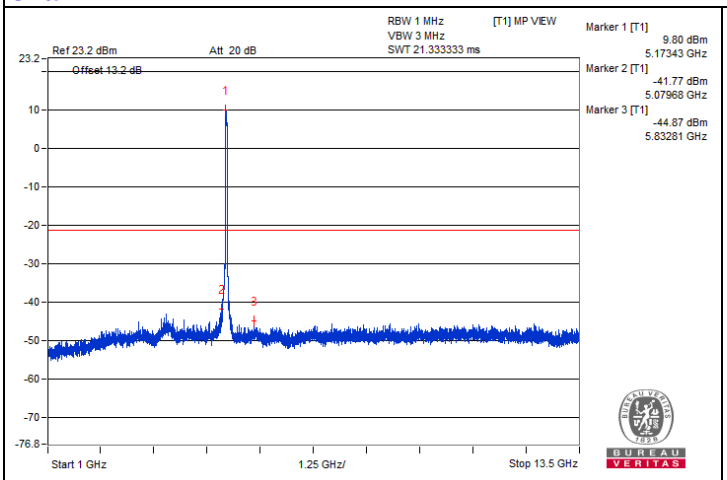


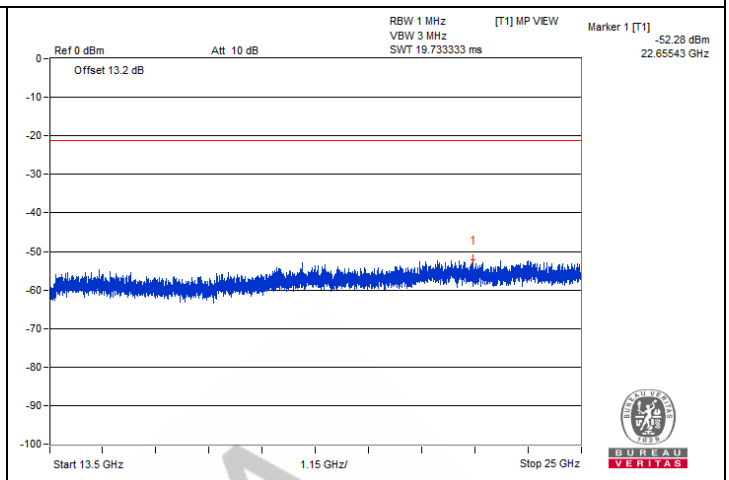

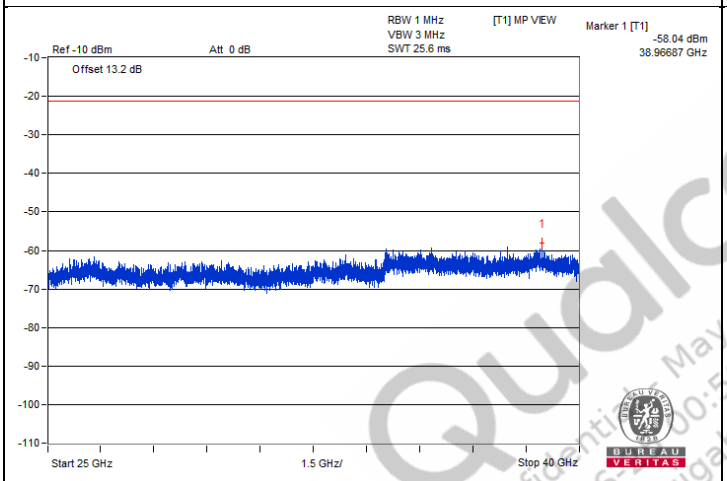

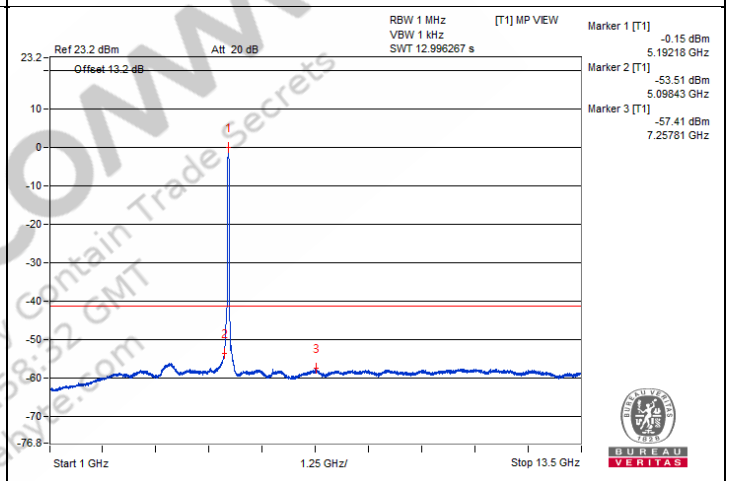

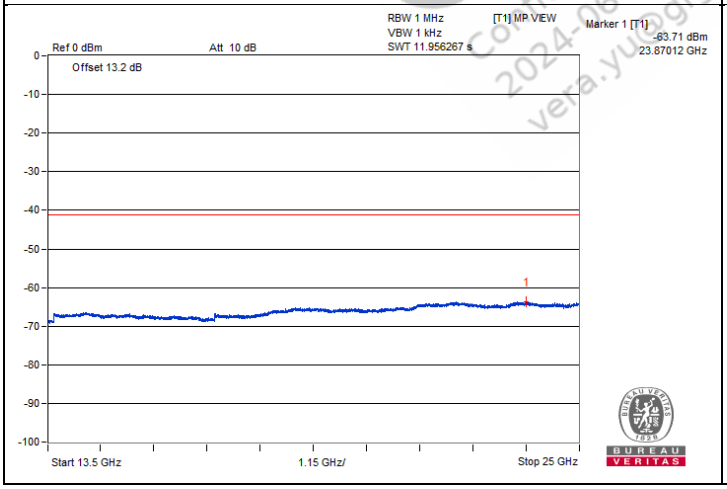

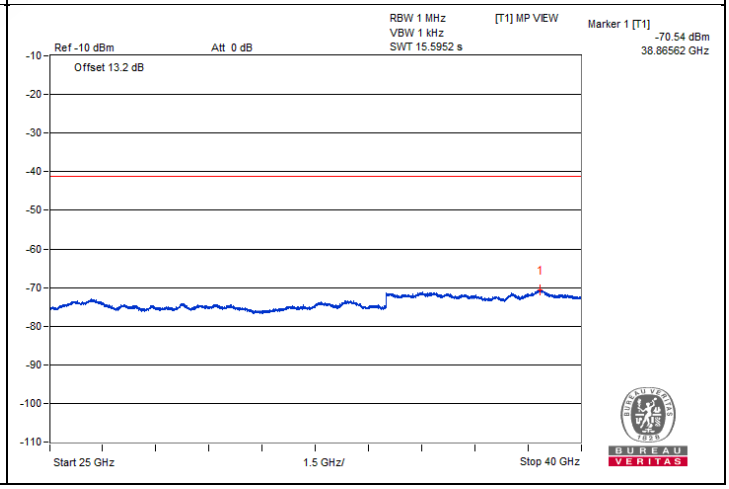

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5142.32	65.6 PK	74	-8.4	-38.22	-40.03	6.36	-29.66
2	5149.87	53.68 AV	54	-0.32	-51.37	-50.56	6.36	-41.58

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

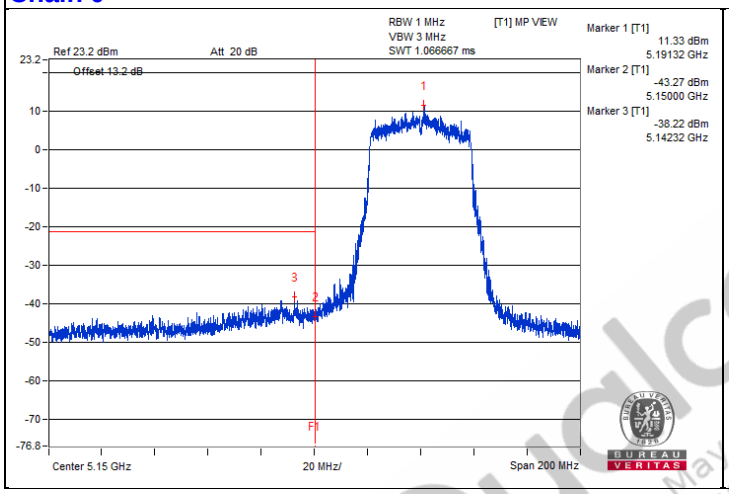

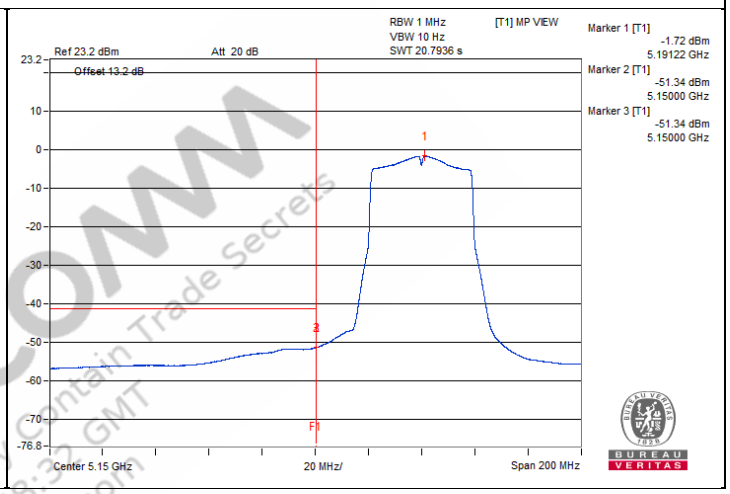

Chain 1

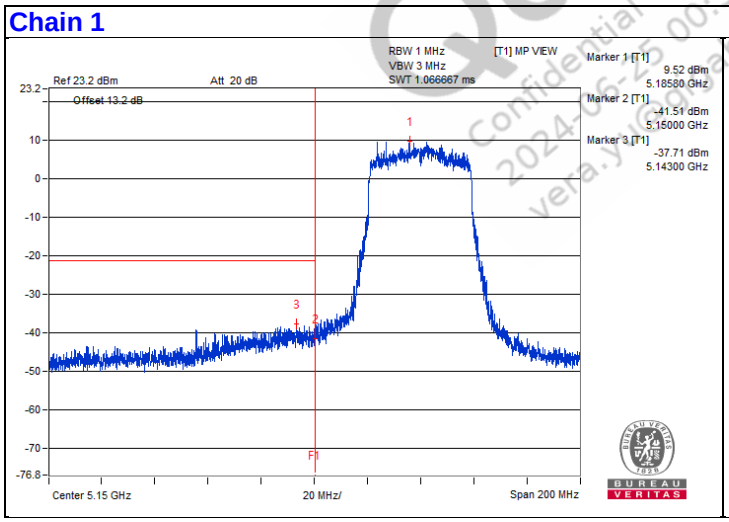

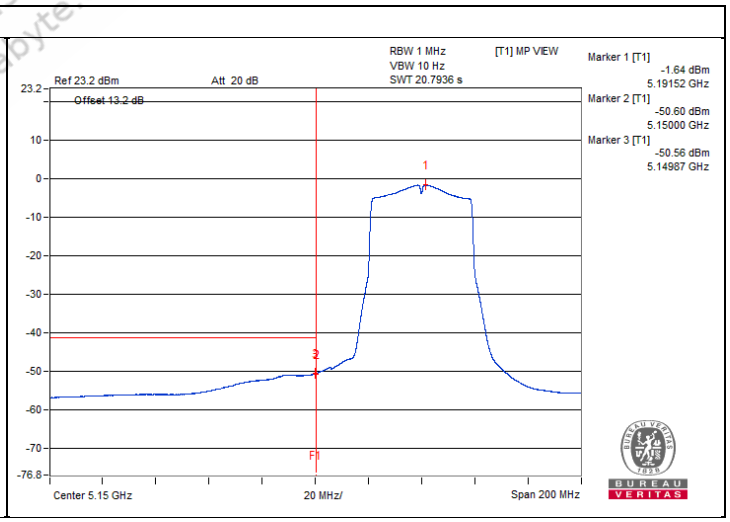

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.y@compliancepyte.com

802.11be (EHT40) - Channel 46

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3496.87	57.85 PK	68.2	-10.35	-48.74	-48.45	8.17	-37.41
2	3503.12	47.04 AV	54	-6.96	-59.39	-59.42	8.17	-48.22
3	#6957.81	59.44 PK	68.2	-8.76	-49.01	-45.63	8.17	-35.82
4	#10445.31	59.25 PK	68.2	-8.95	-46.19	-48.49	8.17	-36.01
5	15682.12	48.44 PK	74	-25.56	-57.22	-58.94	8.17	-46.82
6	15705.12	39.01 AV	54	-14.99	-67.41	-67.45	8.17	-56.25


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

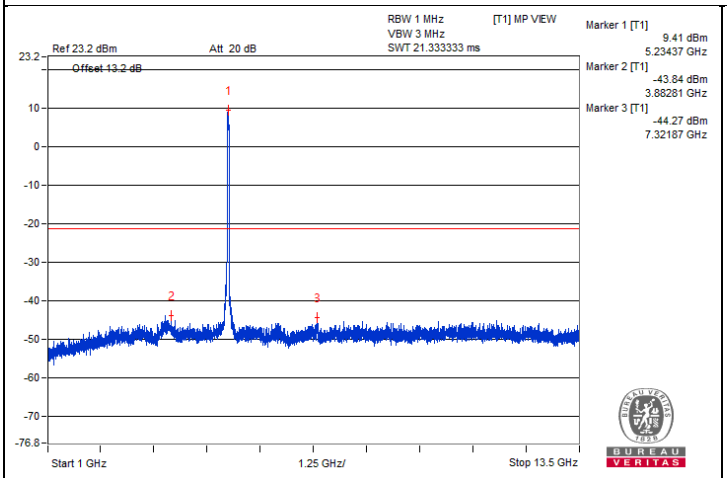


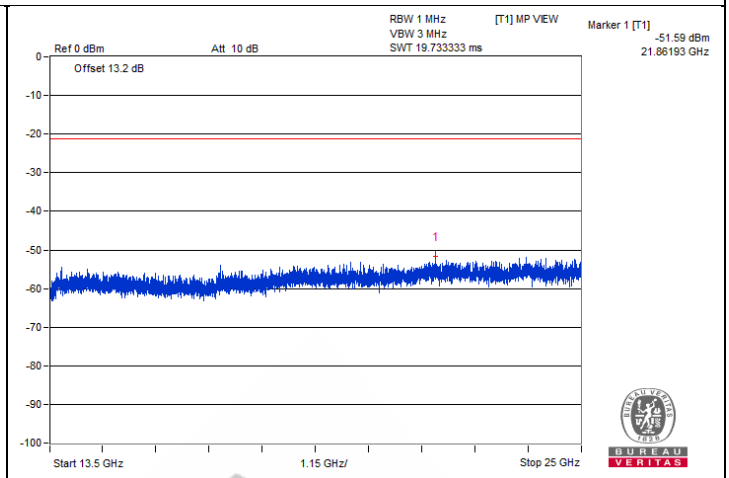

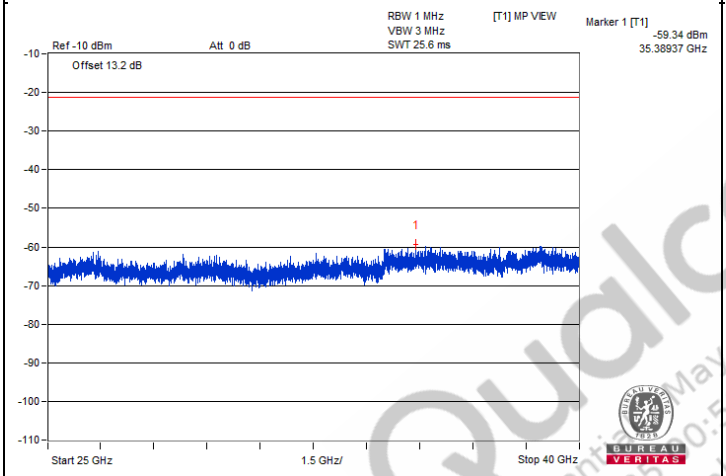

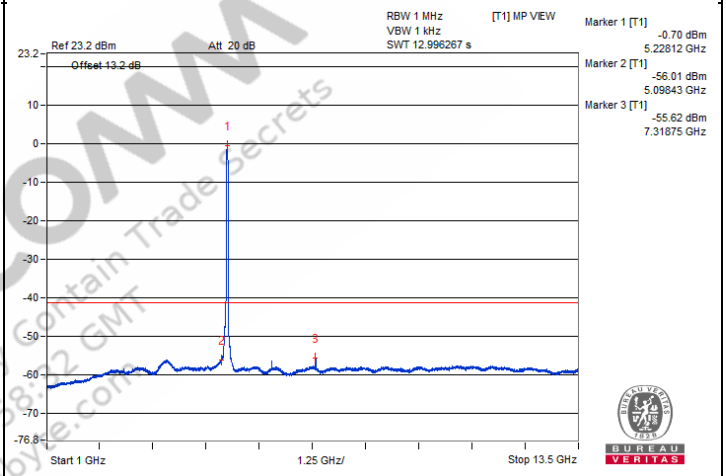


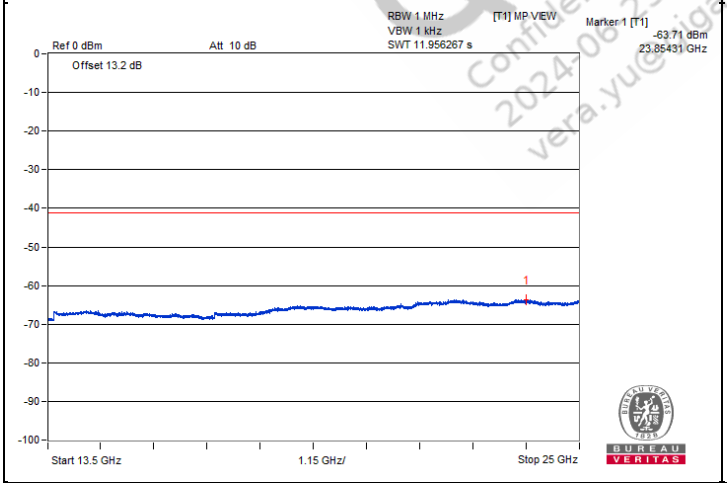


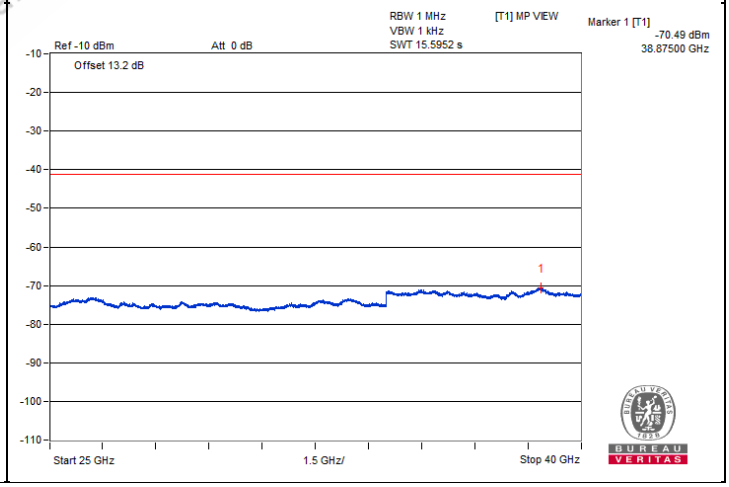



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

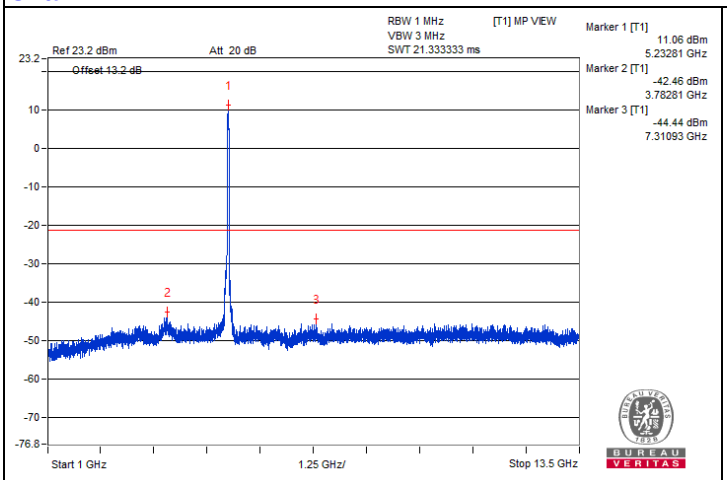


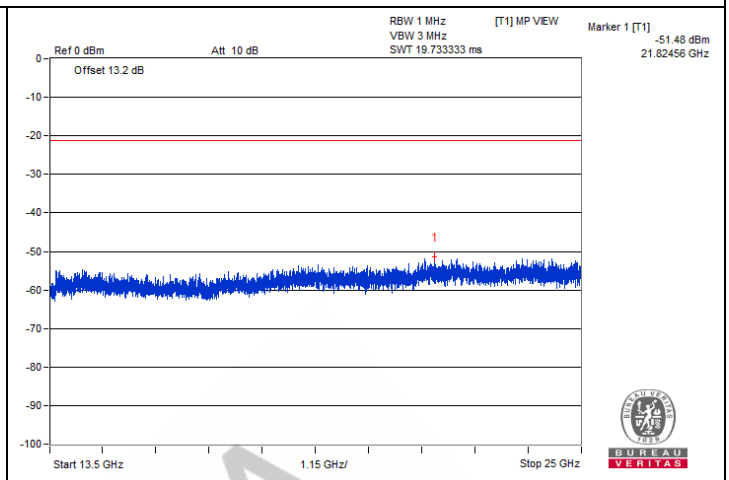

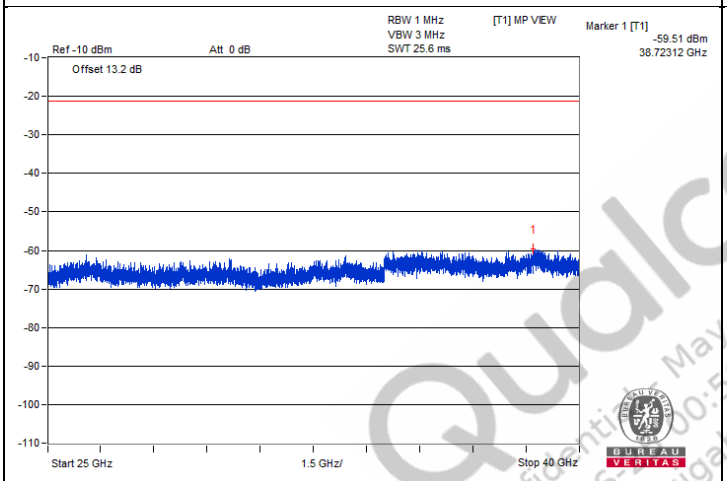

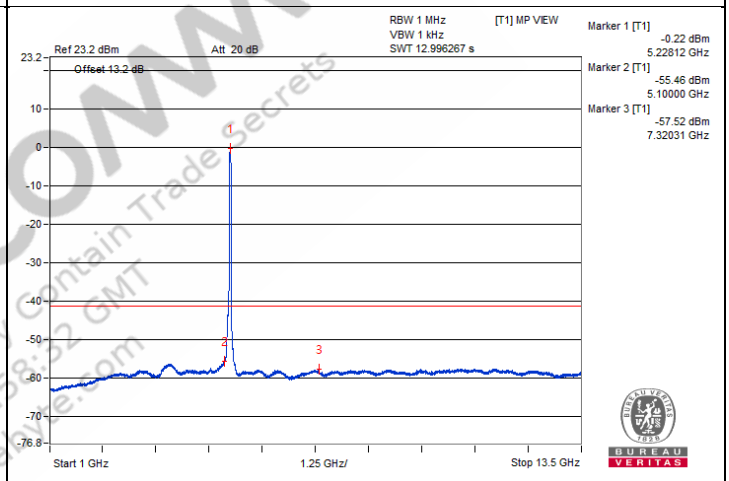

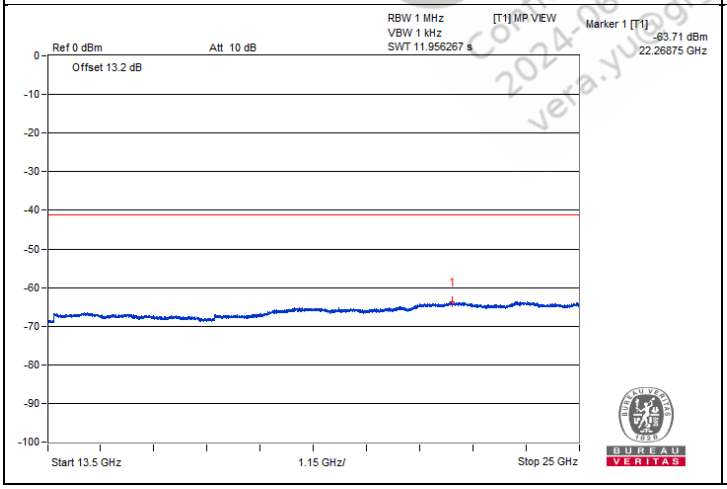

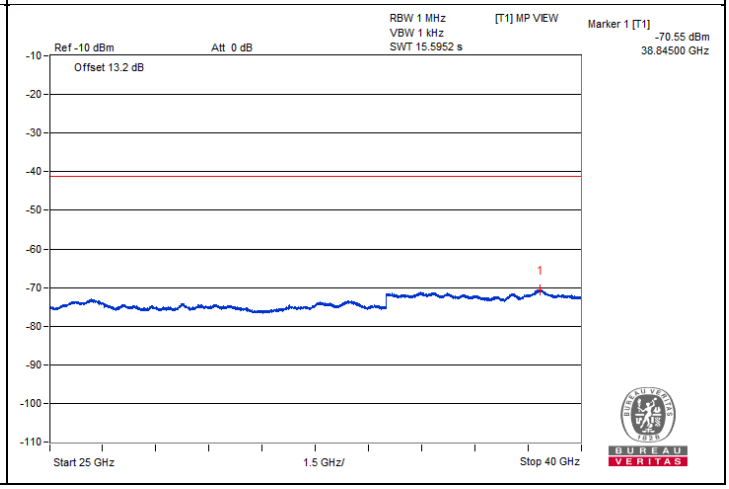

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5147.57	64.7 PK	74	-9.3	-45.57	-37.56	6.36	-30.56
2	5149.97	51.09 AV	54	-2.91	-54.93	-52.49	6.36	-44.17

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

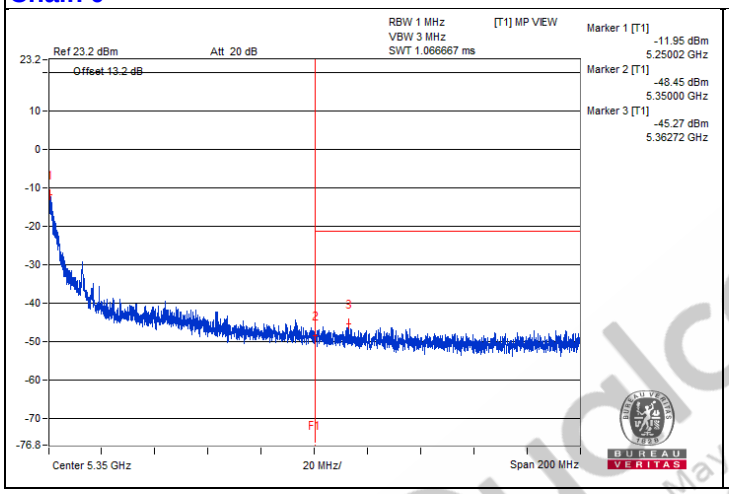

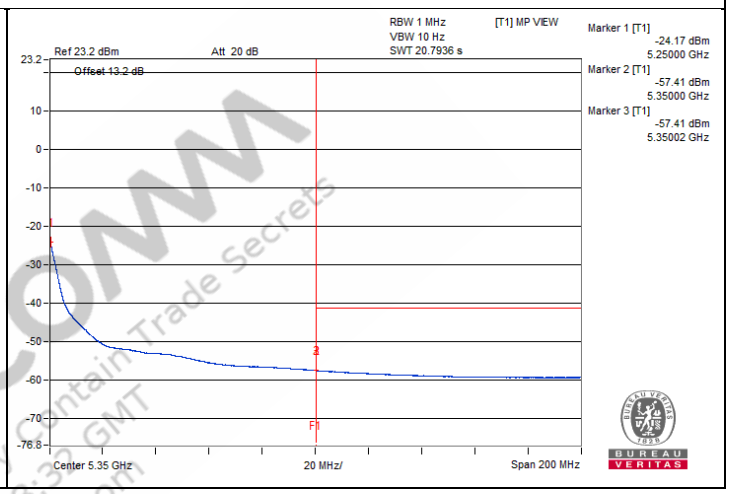

Chain 1

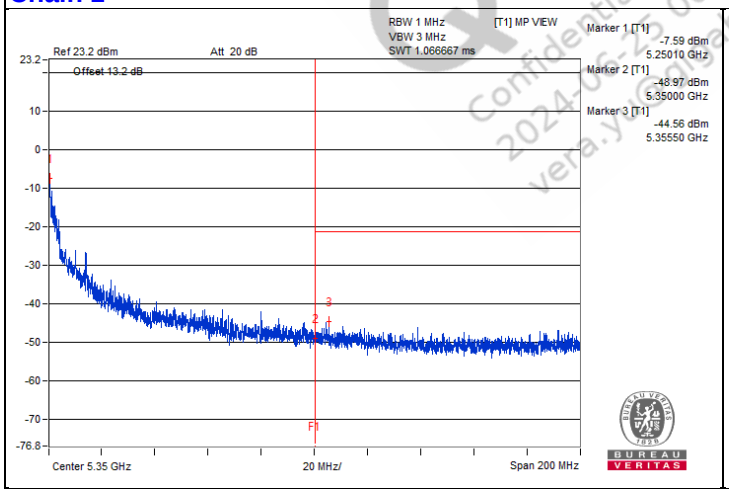

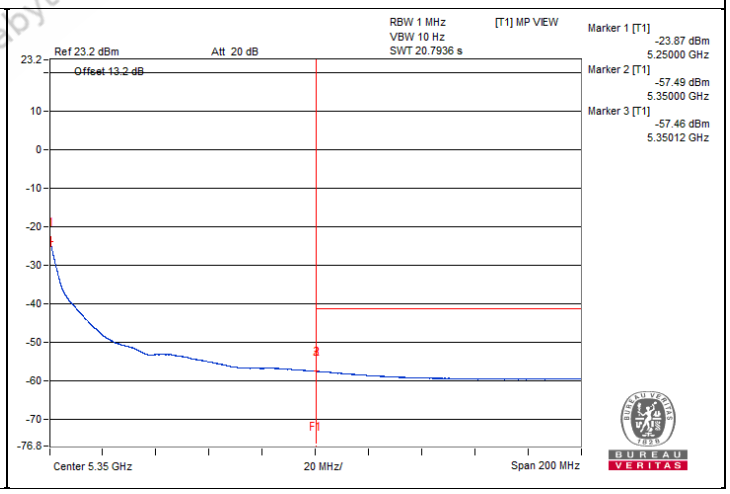

Qualcomm Confidential - May contain Trade Secrets 2024-06-25 00:58:33 GMT vera.yu@cybyte.com

802.11be (EHT40) - Channel 54

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3515.62	57.53 PK	74	-16.47	-48.85	-48.98	8.17	-37.73
2	3521.87	47.11 AV	54	-6.89	-59.16	-59.5	8.17	-48.15
3	#7021.87	58.61 PK	68.2	-9.59	-47.79	-47.87	8.17	-36.65
4	#10543.75	59.58 PK	68.2	-8.62	-47.18	-46.57	8.17	-35.68
5	15820.12	48.51 PK	74	-25.49	-57.56	-58.34	8.17	-46.75
6	15805.75	38.79 AV	54	-15.21	-67.6	-67.7	8.17	-56.47


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

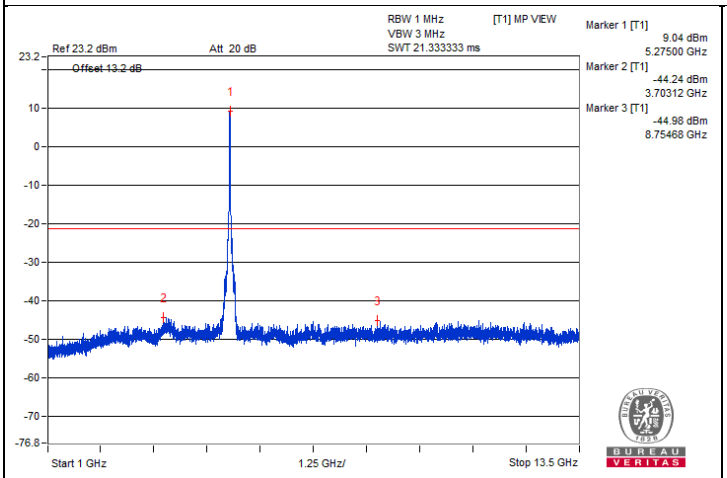


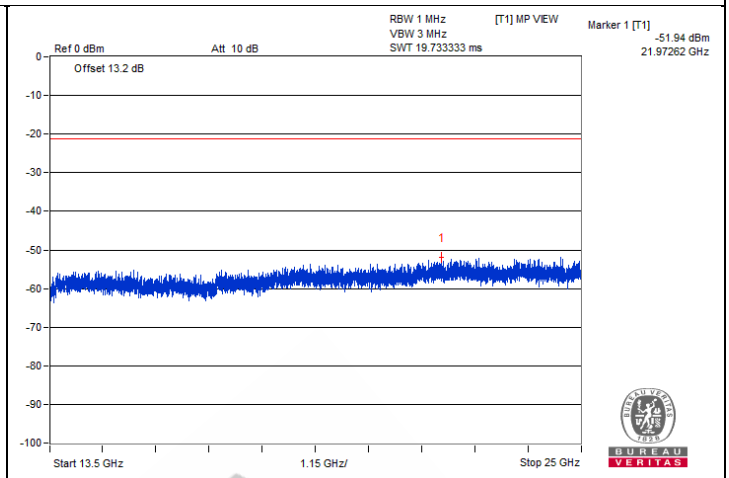

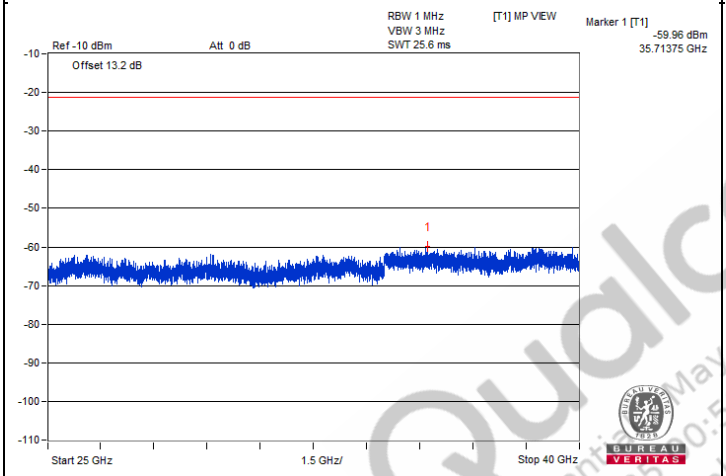

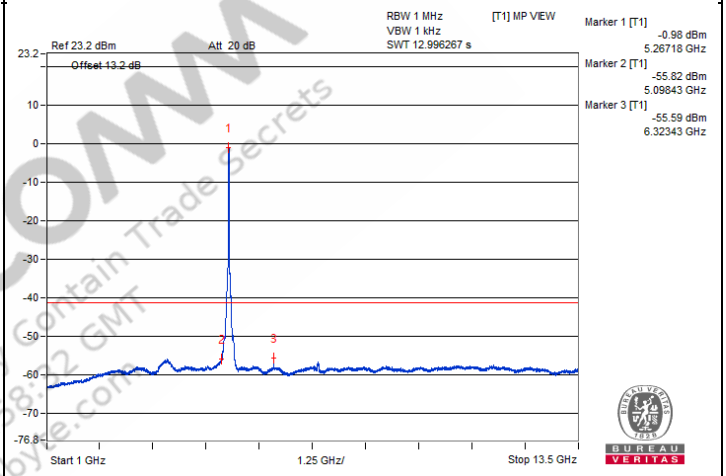


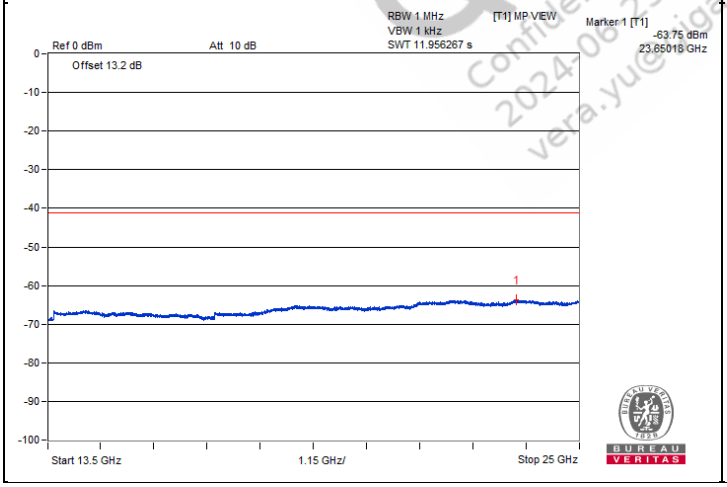


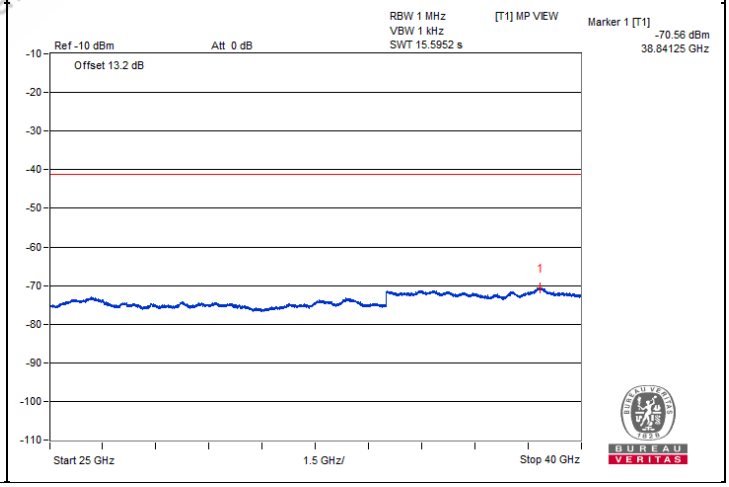



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

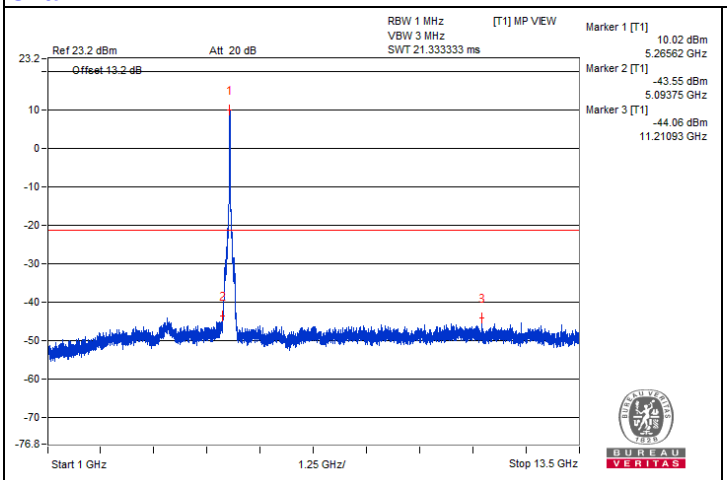


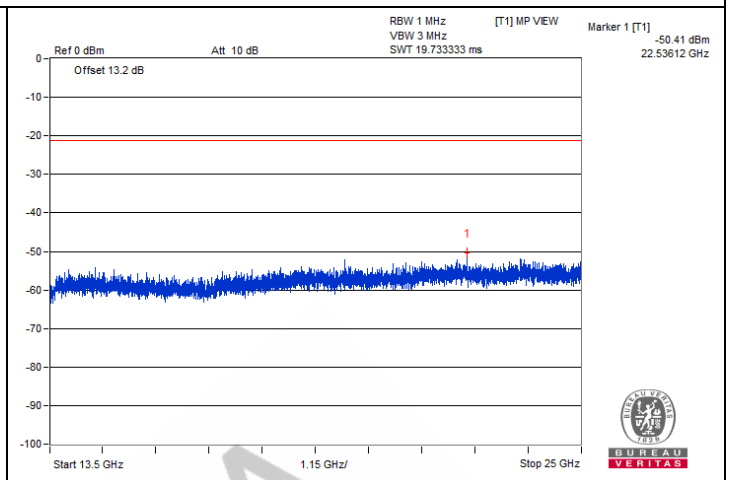

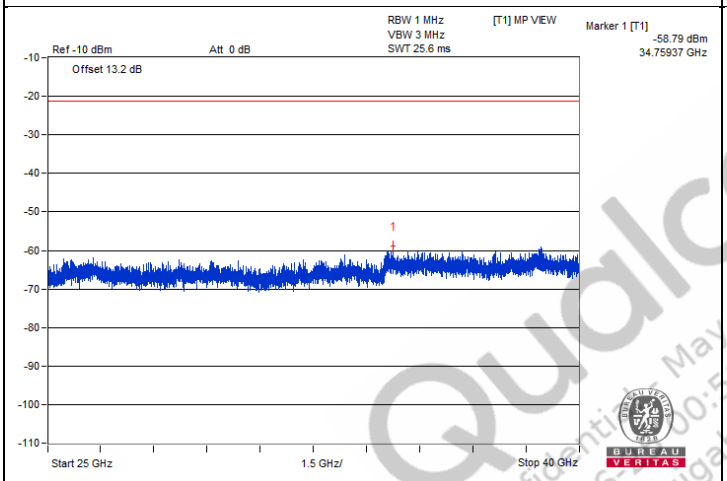

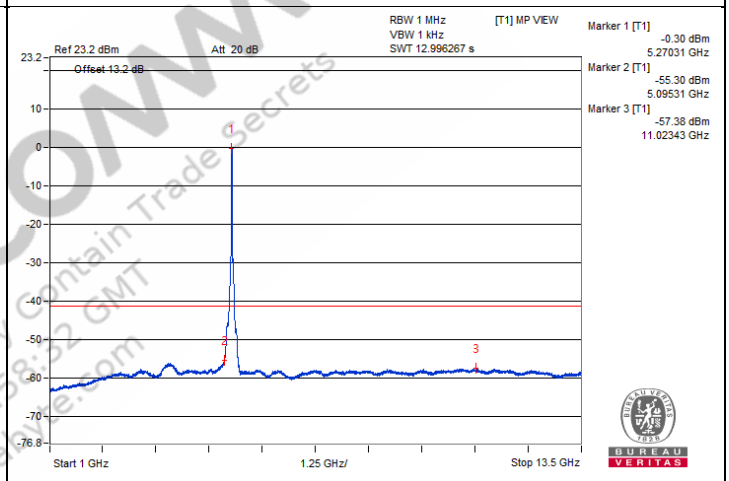

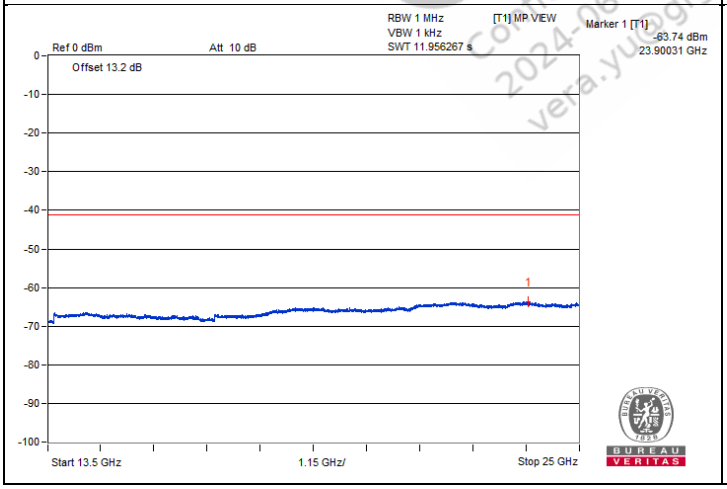

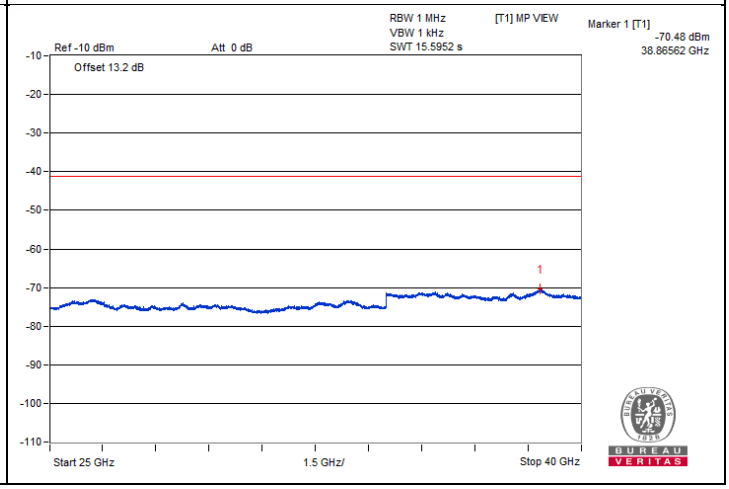

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.95	60.99 PK	74	-13.01	-47.52	-41.71	6.43	-34.27
2	5350.37	48.9 AV	54	-5.1	-56.91	-54.91	6.43	-46.36

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

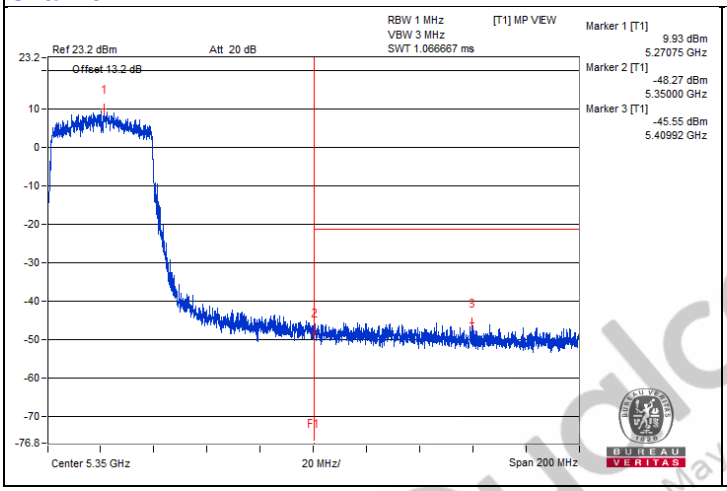

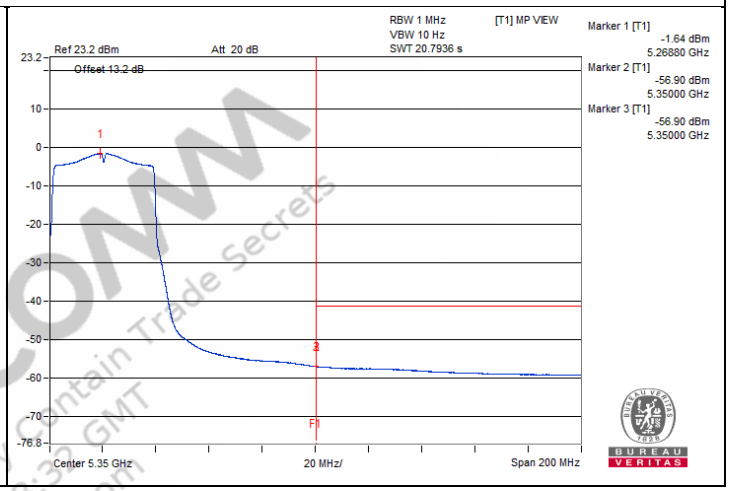

Chain 1

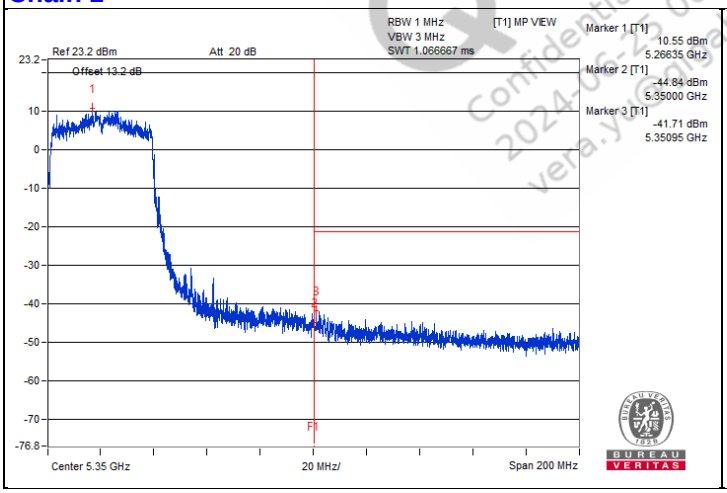

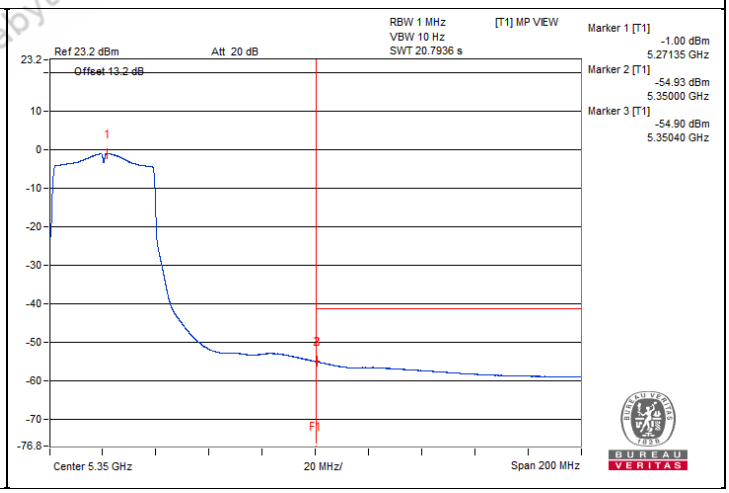

QuoIconn Confidential - May Contain Trade Secrets 2024-06-25 00:58:33 GMT vera.yu@chipbyte.com

802.11be (EHT40) - Channel 62

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3557.81	58.29 PK	74	-15.71	-47.67	-48.68	8.17	-36.97
2	3556.25	47.37 AV	54	-6.63	-59.28	-58.87	8.17	-47.89
3	#7087.5	58.95 PK	68.2	-9.25	-46.69	-48.48	8.17	-36.31
4	10632.81	59.4 PK	74	-14.6	-46.49	-47.66	8.17	-35.86
5	10617.18	48.74 AV	54	-5.26	-57.59	-57.81	8.17	-46.52
6	15926.5	48.27 PK	74	-25.73	-57.37	-59.15	8.17	-46.99
7	15940.87	38.84 AV	54	-15.16	-67.42	-67.78	8.17	-56.42


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

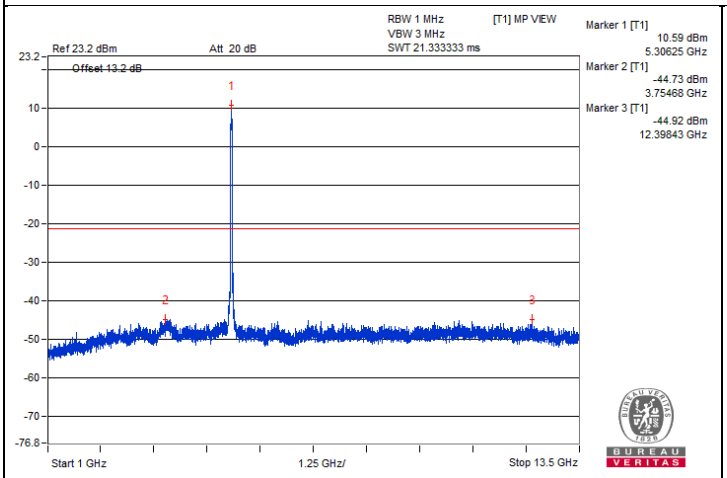


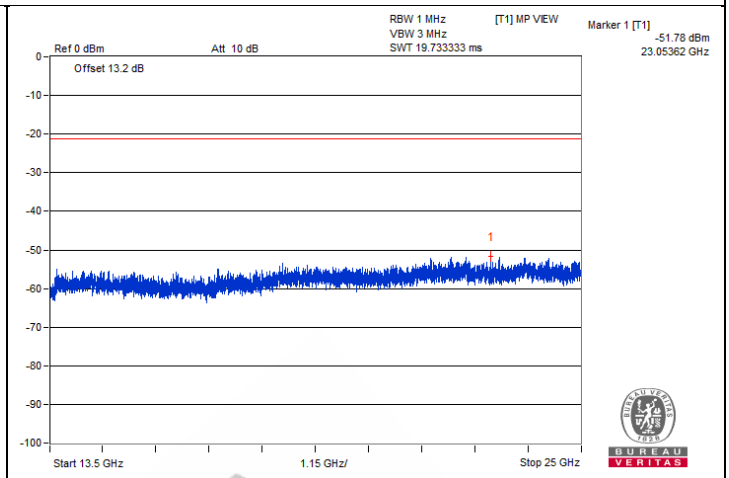

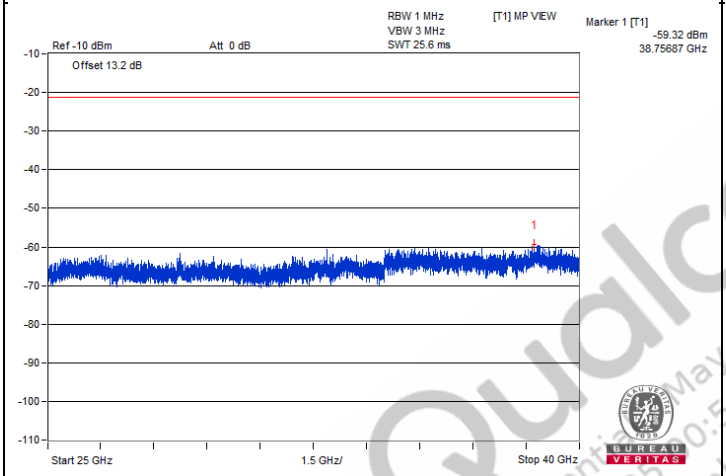

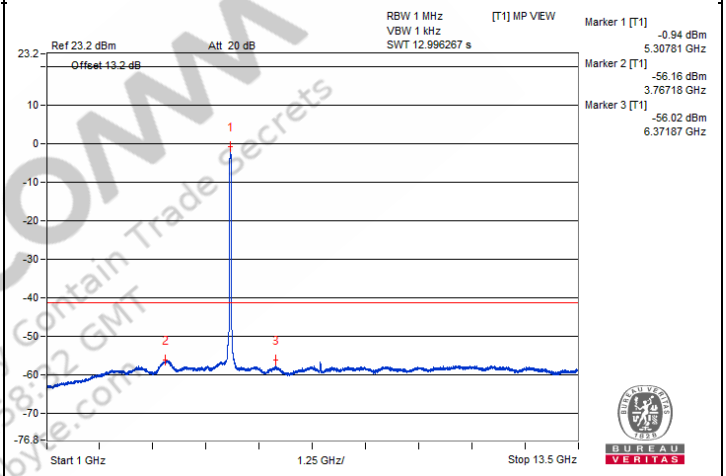


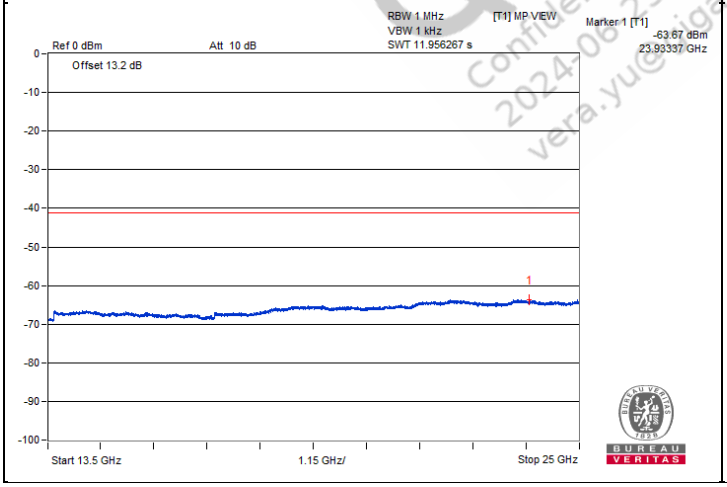


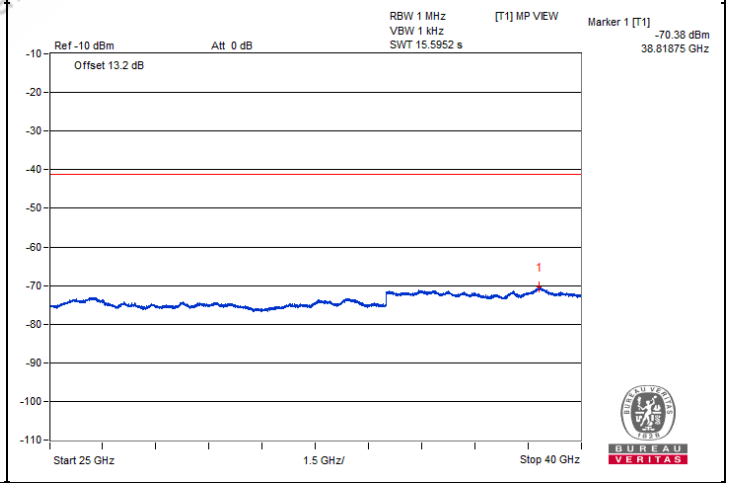



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

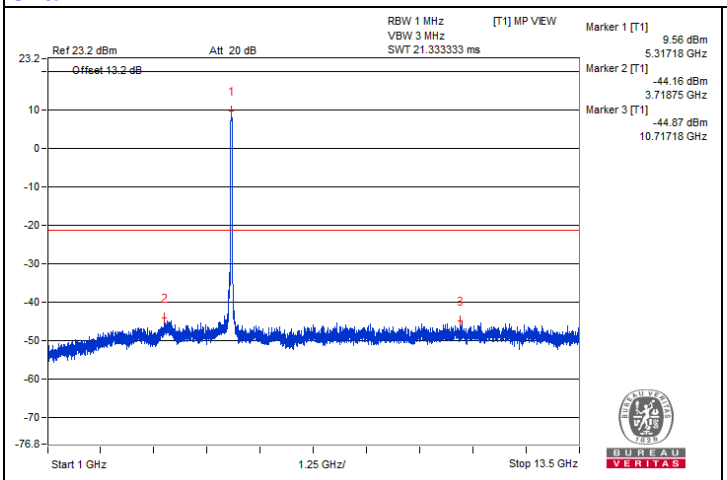


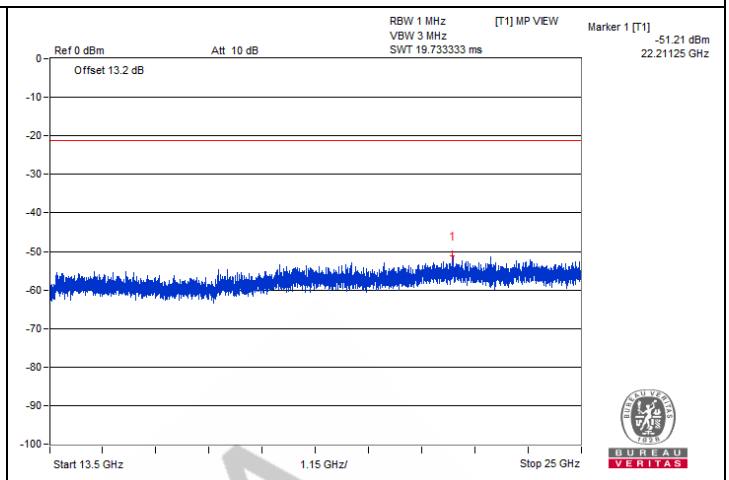

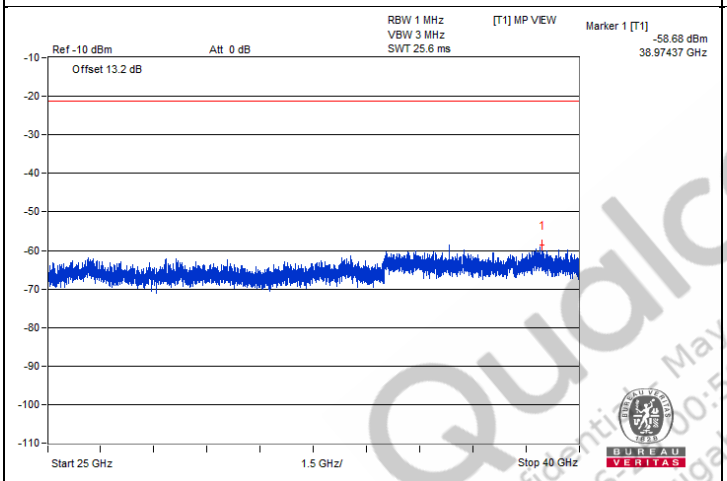

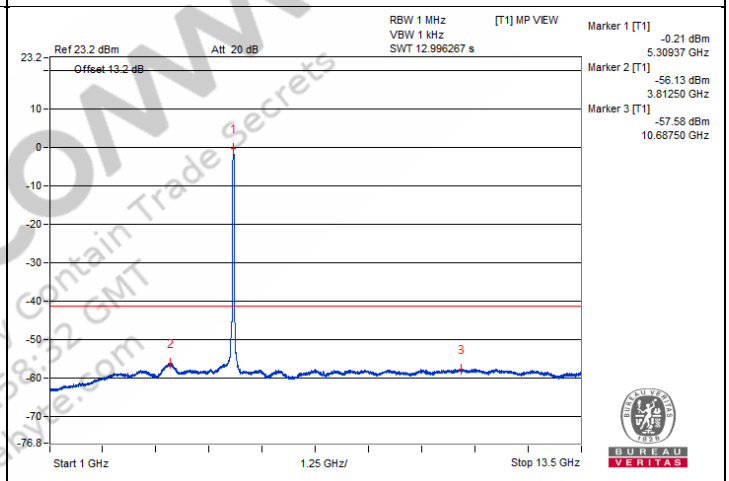

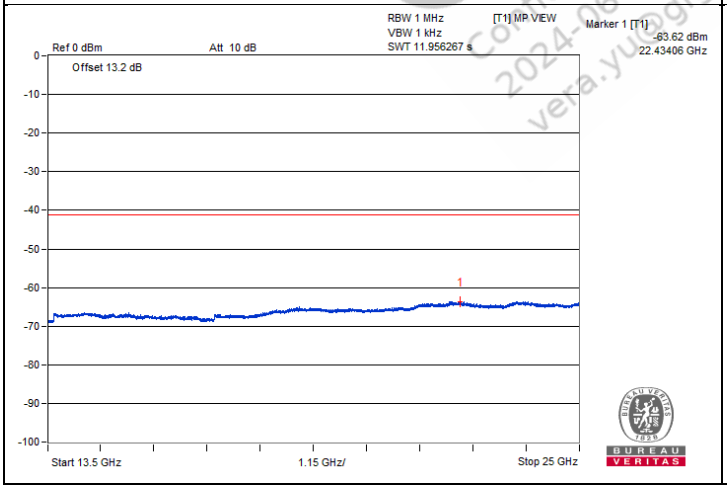

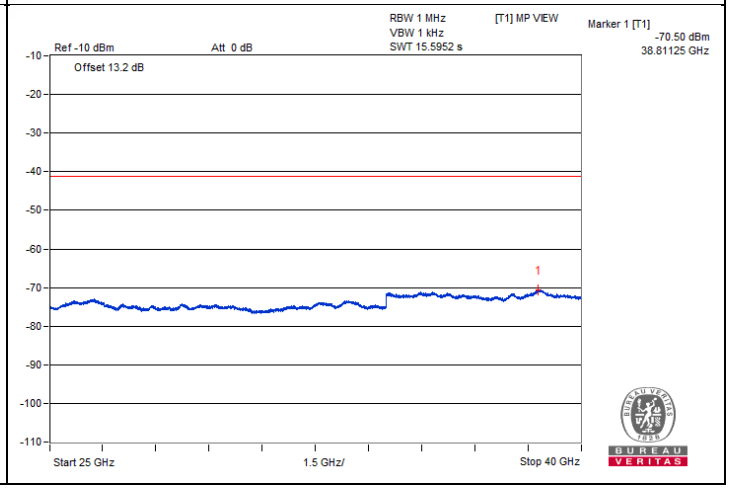

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qgalvie.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.07	66.23 PK	74	-7.77	-44.23	-36.08	6.43	-29.03
2	5350	52.18 AV	54	-1.82	-53.25	-51.9	6.43	-43.08

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

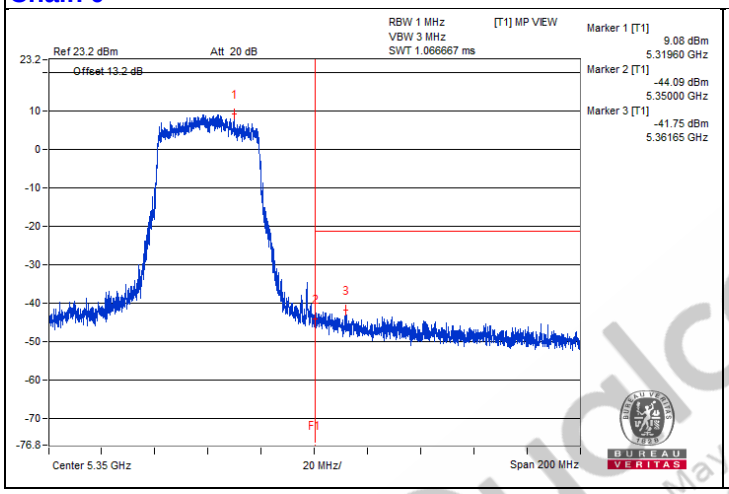

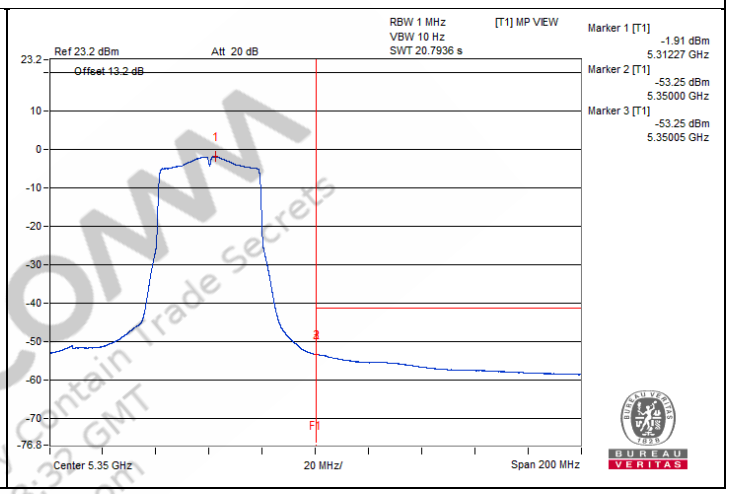

Chain 1

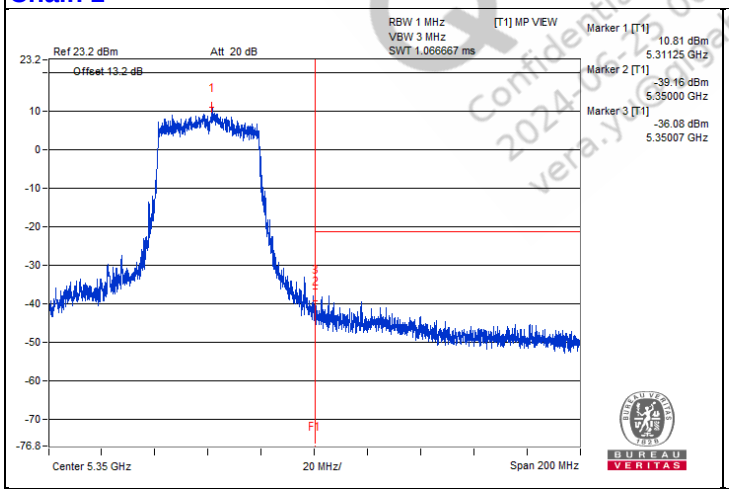

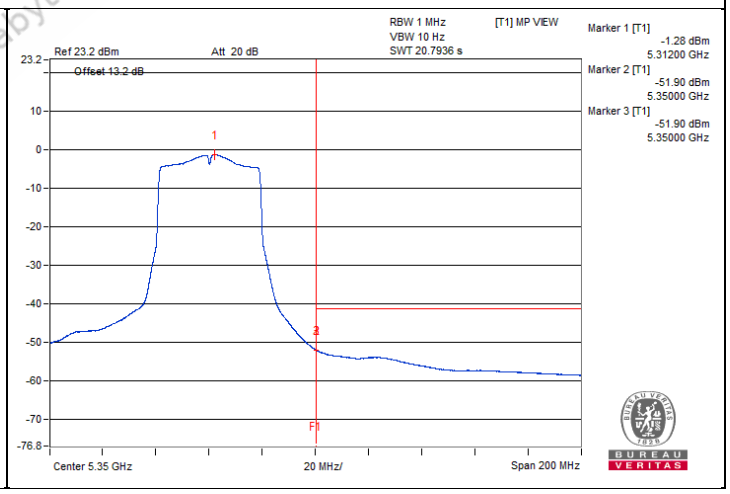

QualcommConfidential - May contain Trade Secrets
2024-06-25 00:58:33 GMT
vera.yu@cybyte.com

802.11be (EHT40) - Channel 102

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3692.18	60.09 PK	74	-13.91	-45.57	-47.29	8.17	-35.17
2	3682.81	49.34 AV	54	-4.66	-56.72	-57.52	8.17	-45.92
3	7337.5	58.67 PK	74	-15.33	-47.08	-48.58	8.17	-36.59
4	7328.12	48.1 AV	54	-5.9	-58.35	-58.34	8.17	-47.16
5	11026.56	59.26 PK	74	-14.74	-46.56	-47.91	8.17	-36.00
6	11015.62	48.66 AV	54	-5.34	-57.93	-57.64	8.17	-46.60
7	#16533.12	49.95 PK	68.2	-18.25	-56.53	-56.45	8.17	-45.31


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

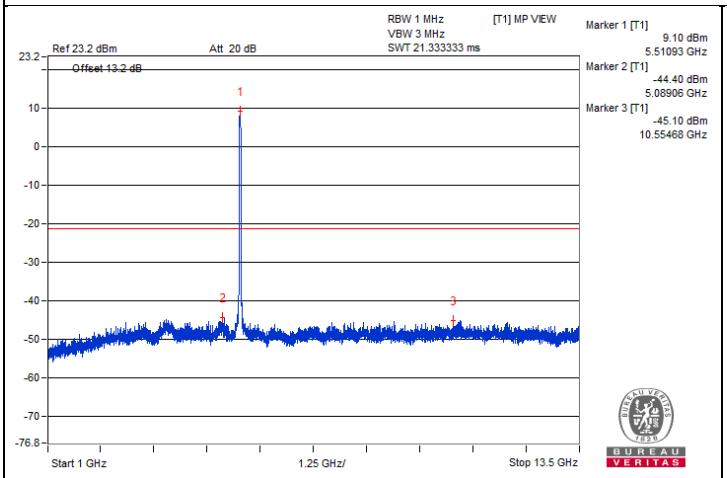


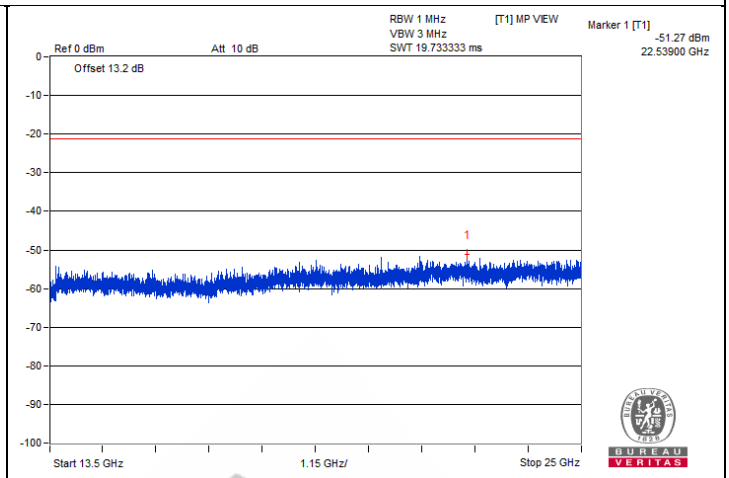

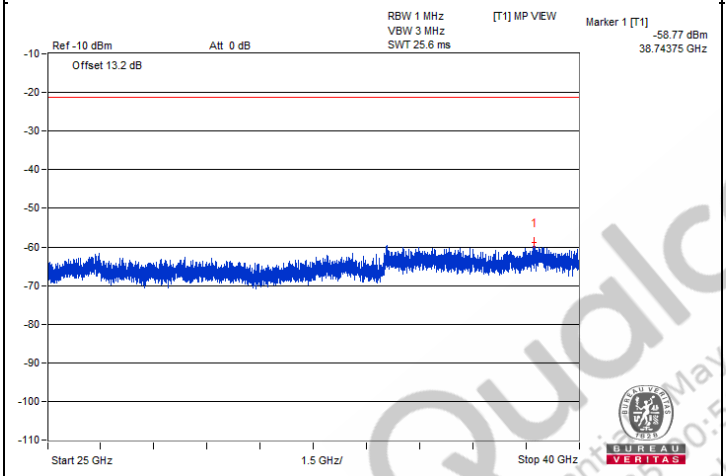

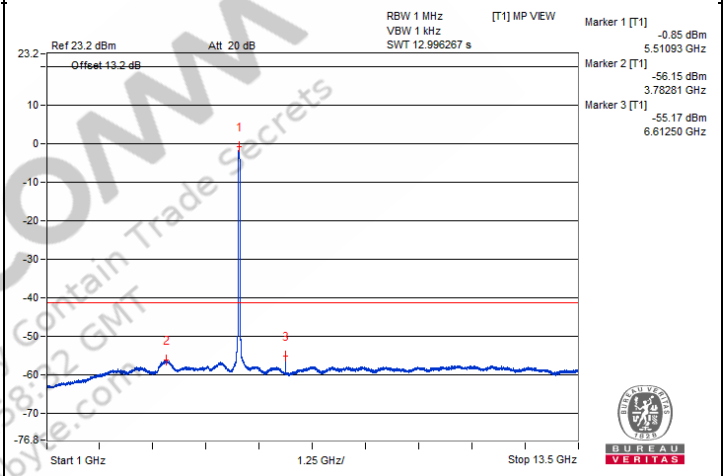


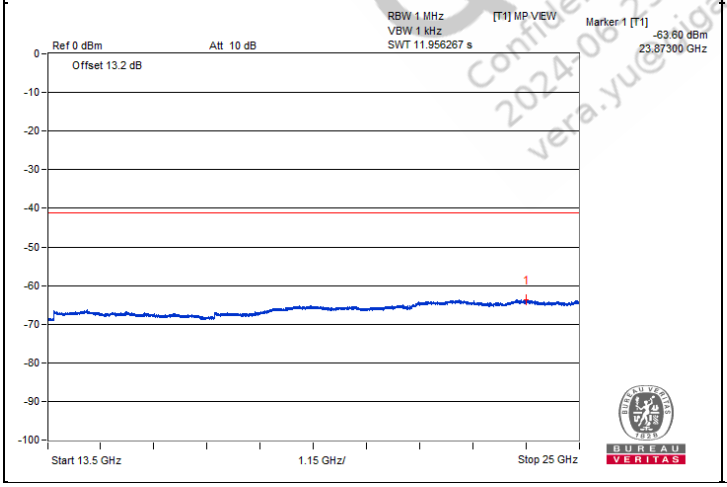


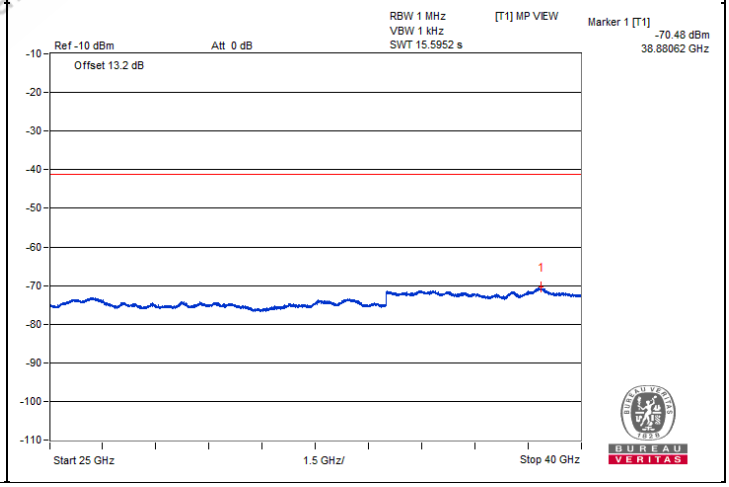



QualcOMM Confidential and May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

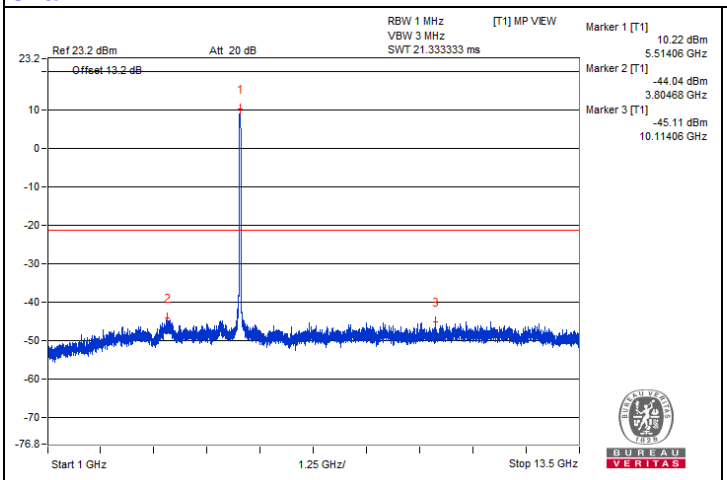


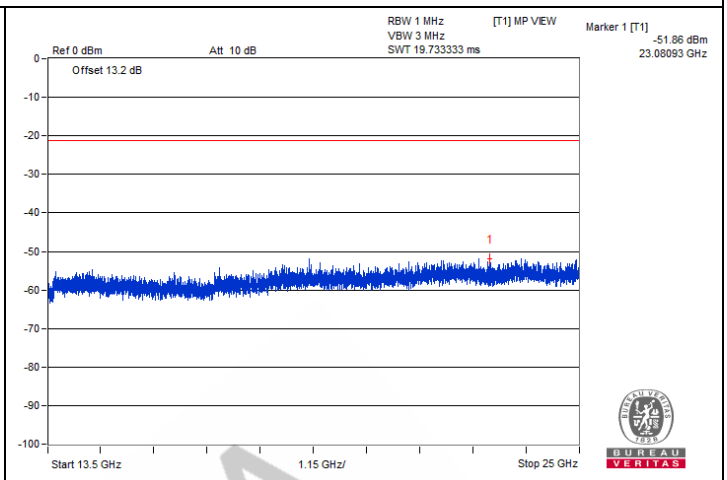

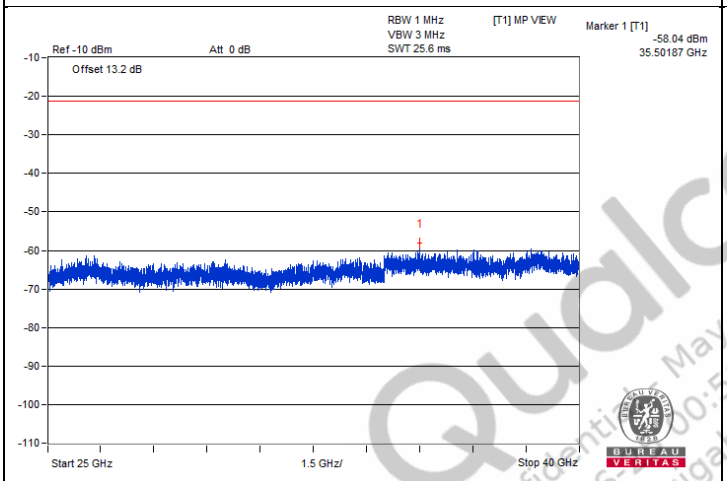

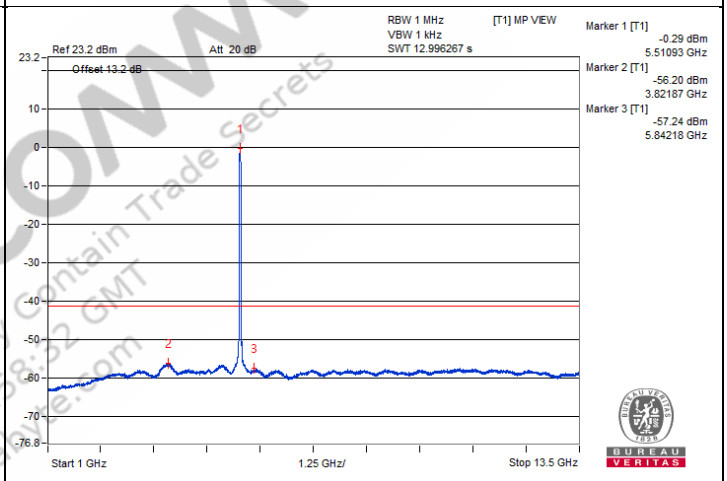

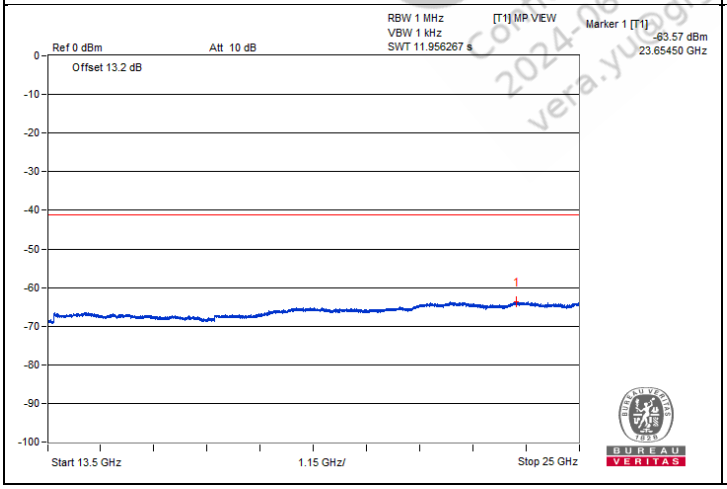

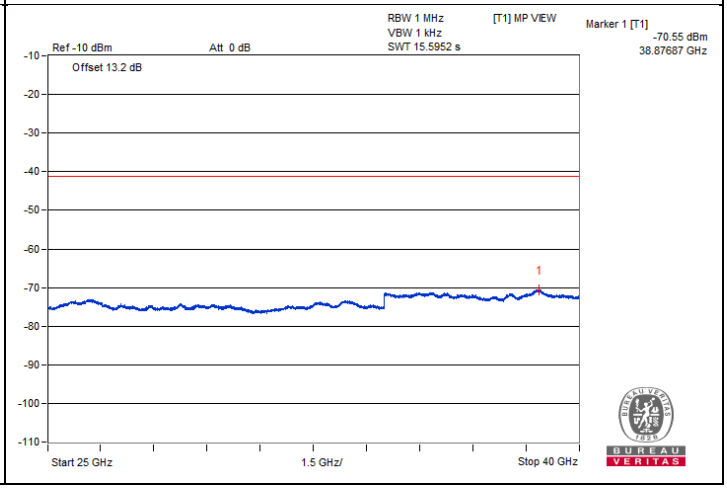

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5454.46	64.06 PK	74	-9.94	-42.71	-41.45	7.82	-31.20
2	5459.34	52.23 AV	54	-1.77	-54.39	-53.38	7.82	-43.03
3	#5464.59	64.1 PK	68.2	-4.1	-42.34	-41.66	7.82	-31.16

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

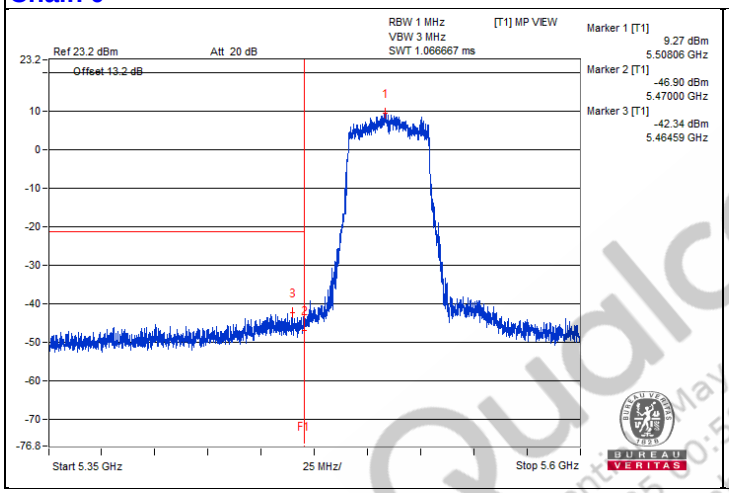

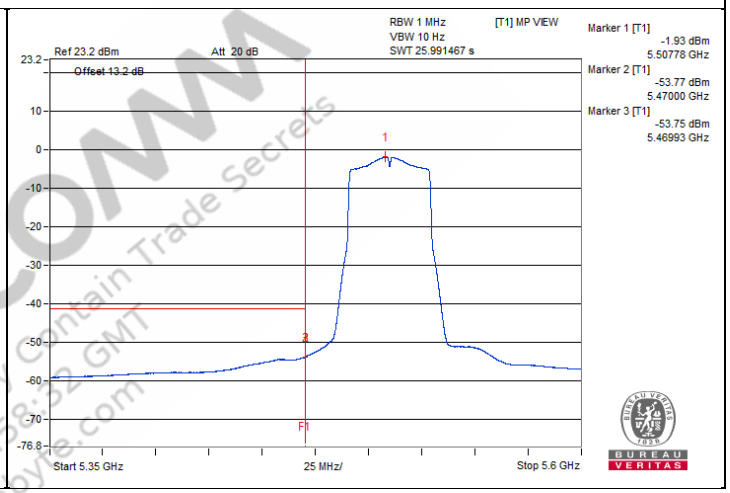

Chain 1

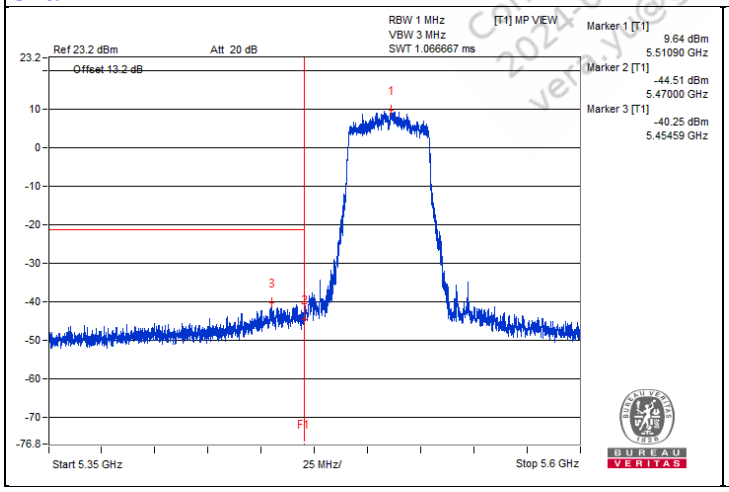

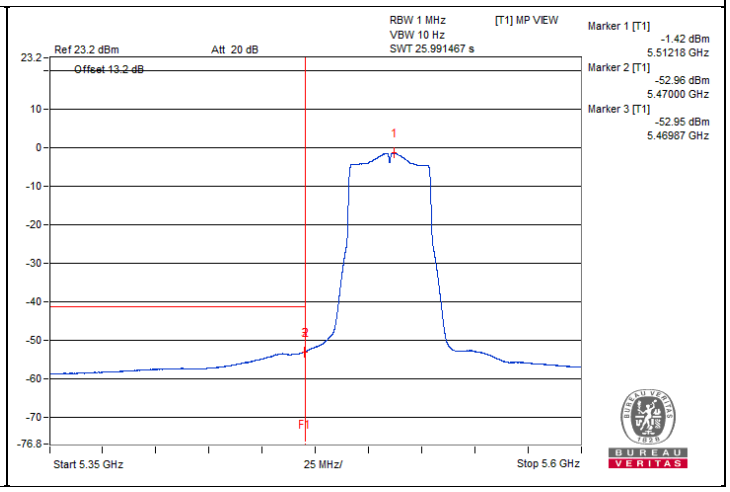

Qualcomm Confidential and May Contain Trade Secrets
2021-06-25 10:58:32 GMT
vern.yu@gigabyte.com

802.11be (EHT40) - Channel 110

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3706.25	60.22 PK	74	-13.78	-45.7	-46.82	8.17	-35.04
2	3718.75	49.58 AV	54	-4.42	-56.93	-56.8	8.17	-45.68
3	7417.18	58.91 PK	74	-15.09	-49.02	-46.42	8.17	-36.35
4	7404.68	47.6 AV	54	-6.4	-58.64	-59.05	8.17	-47.66
5	11114.06	59.13 PK	74	-14.87	-48.65	-46.29	8.17	-36.13
6	11107.81	48.68 AV	54	-5.32	-57.7	-57.83	8.17	-46.58
7	#16630.87	48.25 PK	68.2	-19.95	-56.97	-59.88	8.17	-47.01


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

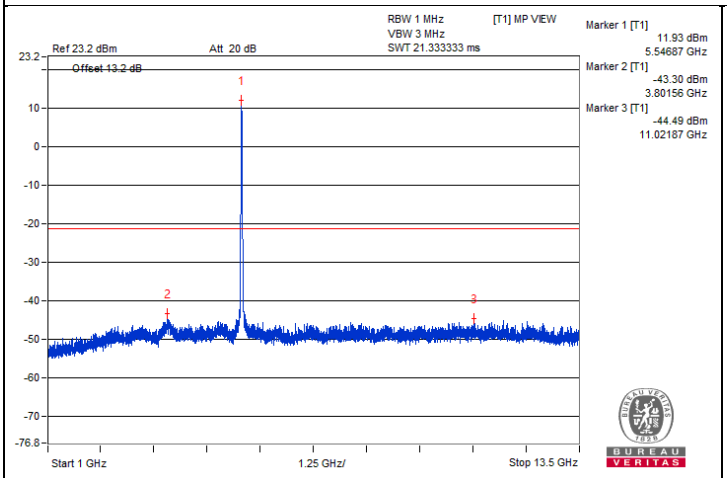


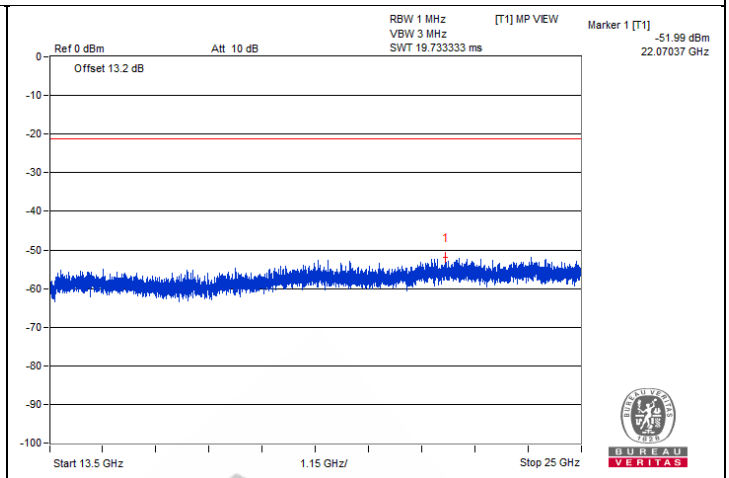

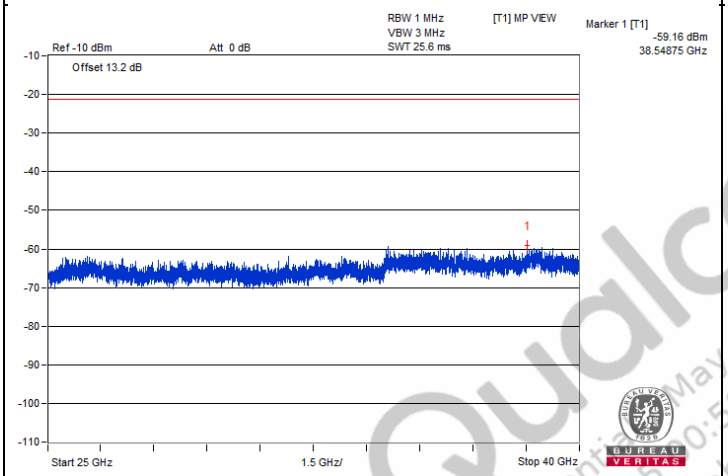

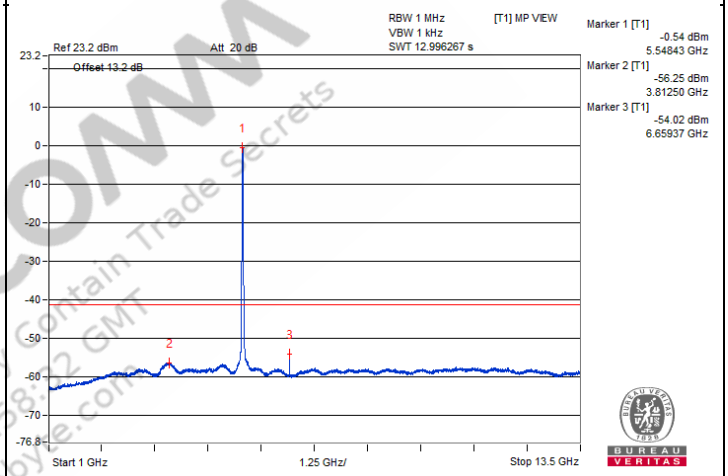


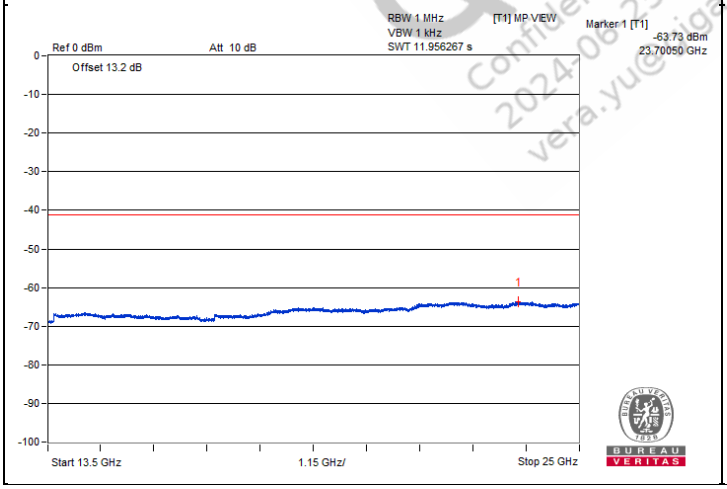


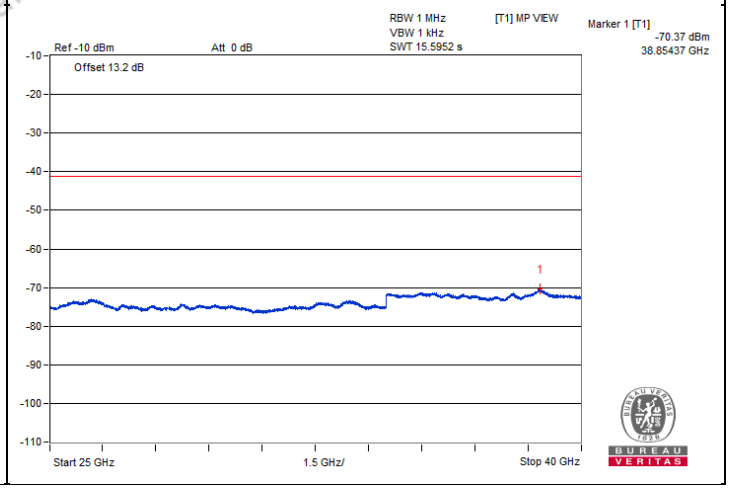



Qualcomm
Confidential – May Contain Trade Secrets
2024-06-25 10:58:02 GMT
vera.yue@gigabyte.com


Chain 1

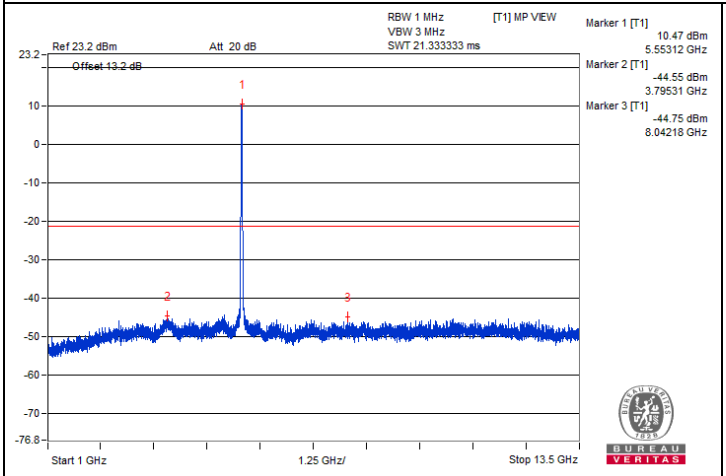


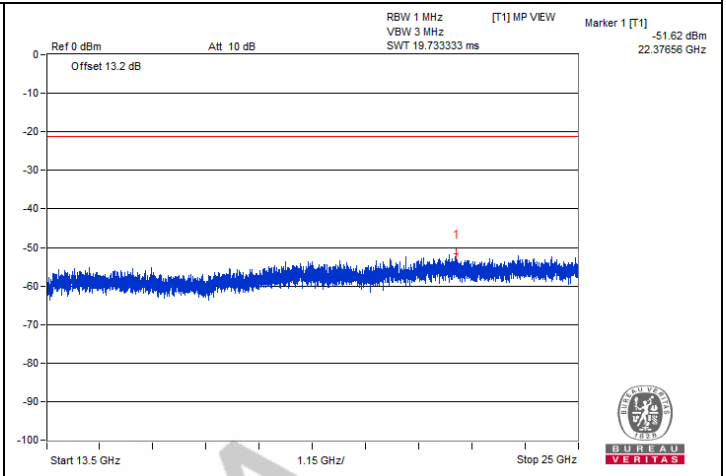

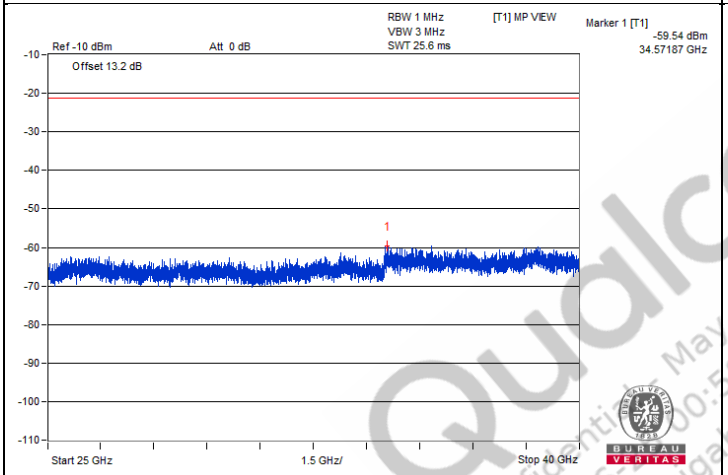

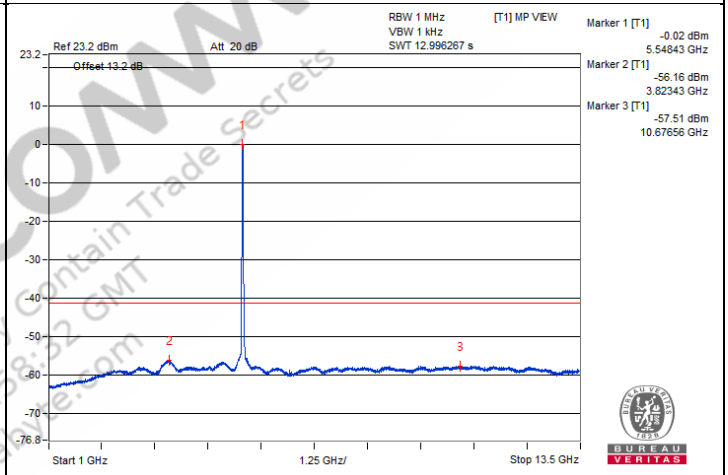

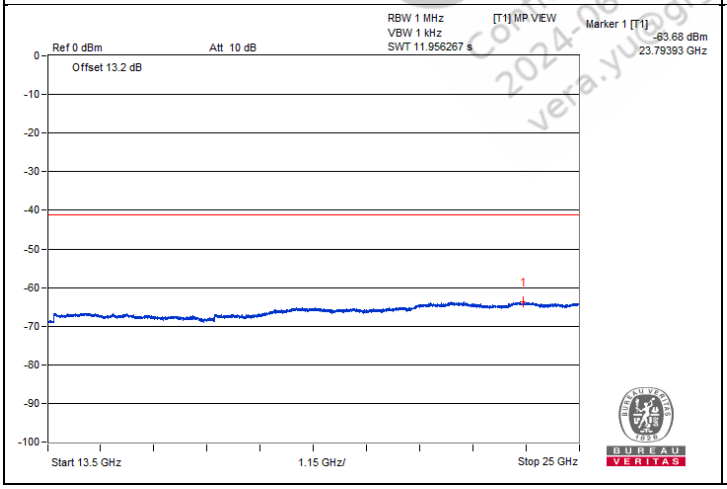

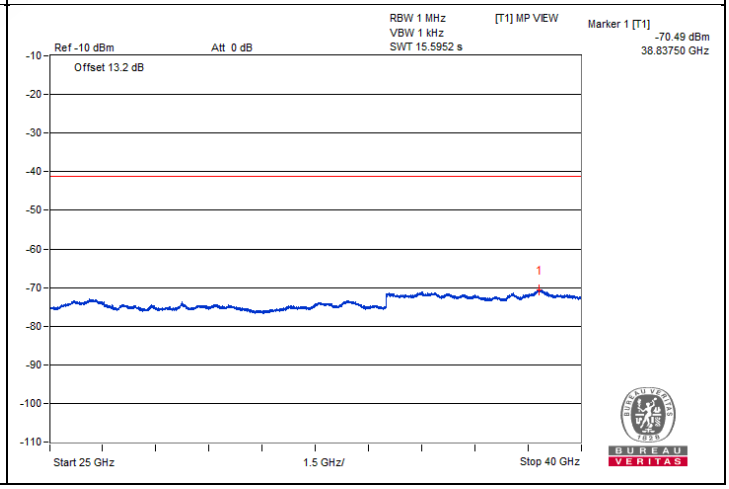

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5447.28	60.47 PK	74	-13.53	-45.15	-46.15	7.82	-34.79
2	5459.65	49.45 AV	54	-4.55	-56.88	-56.42	7.82	-45.81
3	#5463.25	61.07 PK	68.2	-7.13	-47.25	-43.55	7.82	-34.19


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

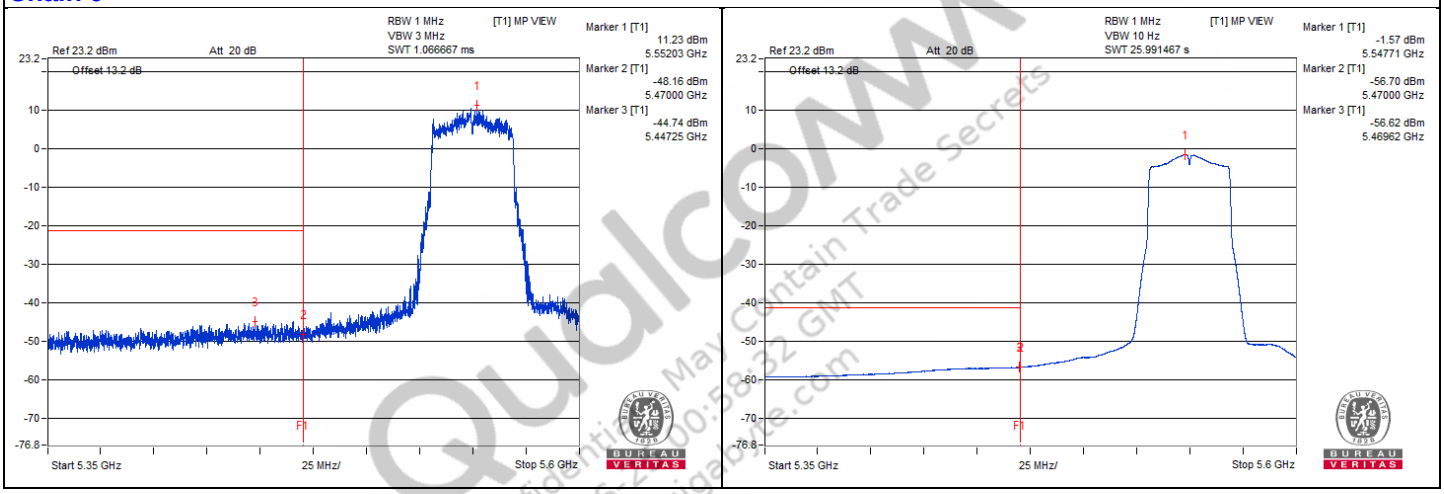

Chain 1

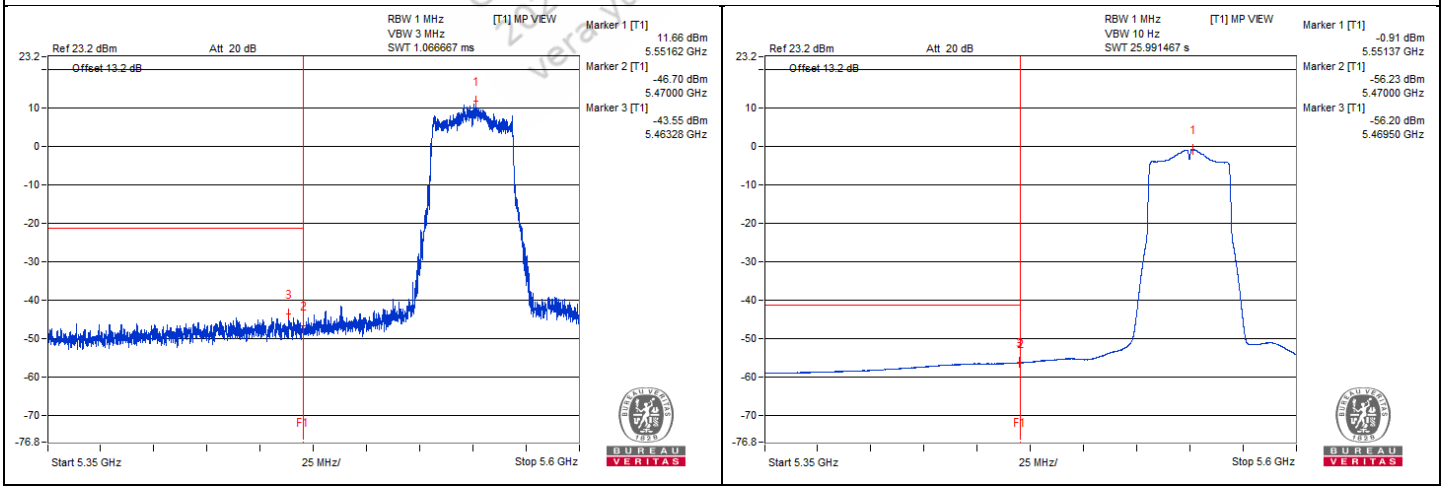

QualcOMM Confidential Information May Contain Trade Secrets 2024-06-21 00:58:32 GMT verayu@gigabyte.com

802.11be (EHT40) - Channel 134

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3782.81	60.92 PK	74	-13.08	-45.16	-45.92	8.17	-34.34
2	3787.5	50.2 AV	54	-3.8	-56.38	-56.11	8.17	-45.06
3	7548.43	58.31 PK	74	-15.69	-47.31	-49.14	8.17	-36.95
4	7578.12	47.83 AV	54	-6.17	-58.44	-58.79	8.17	-47.43
5	11326.56	58.55 PK	74	-15.45	-49.25	-46.85	8.17	-36.71
6	11339.06	48.2 AV	54	-5.8	-58.11	-58.37	8.17	-47.06
7	#16991.68	48.66 PK	68.2	-19.54	-57.89	-57.67	8.17	-46.60


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

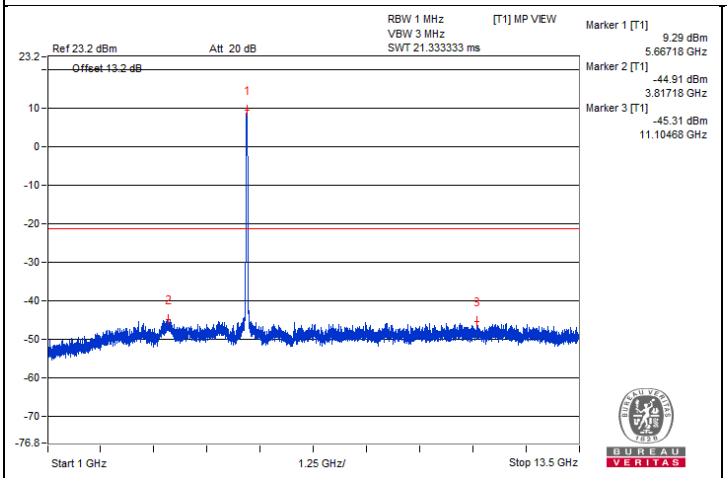


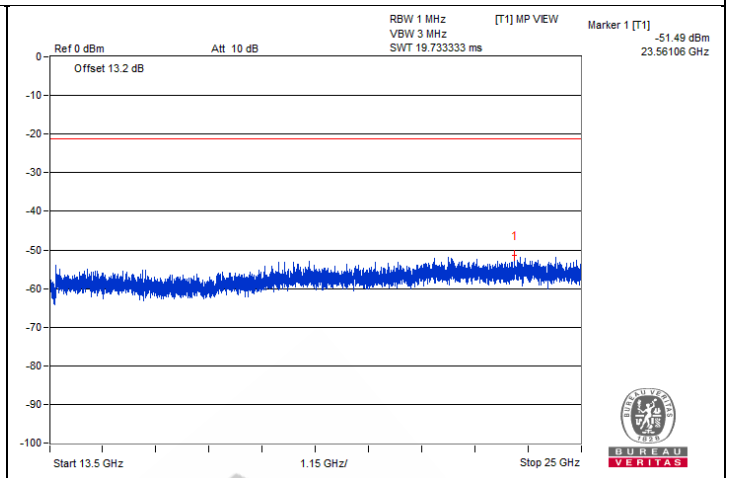

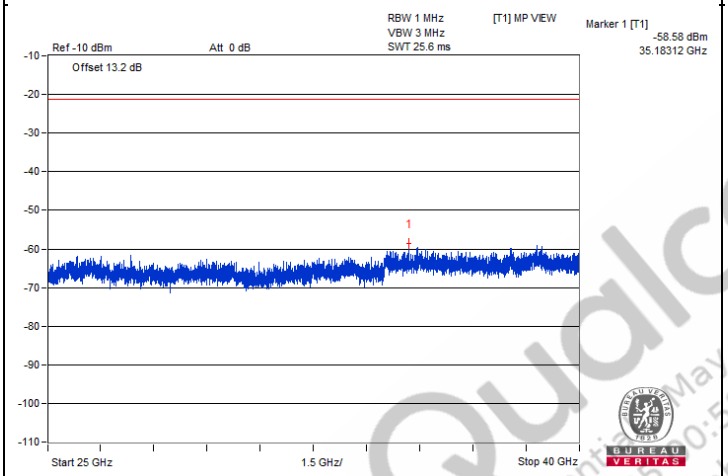

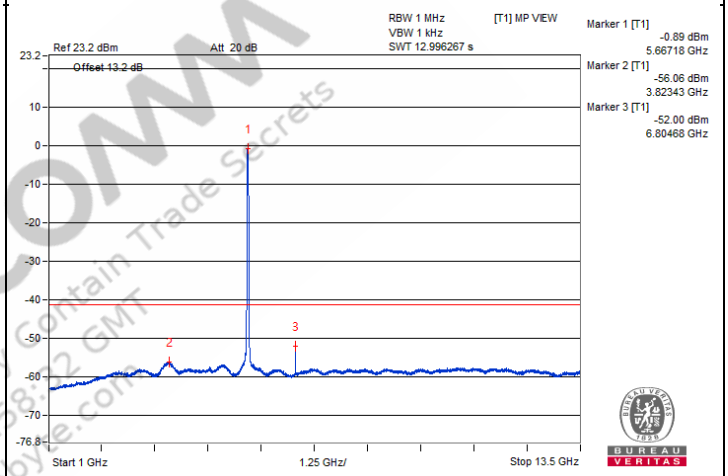


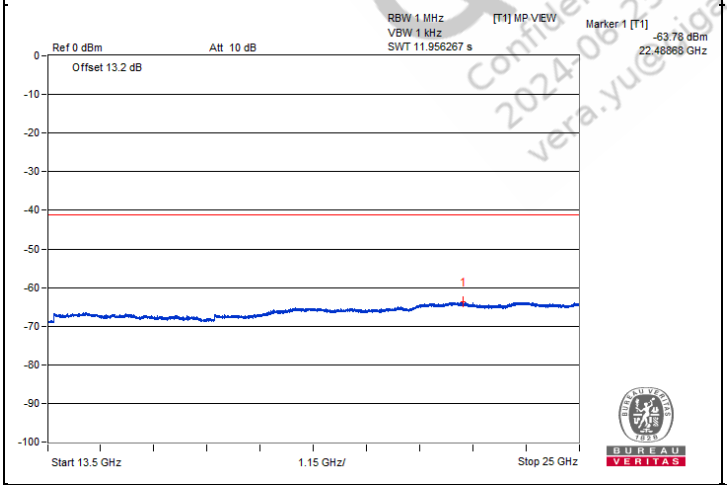


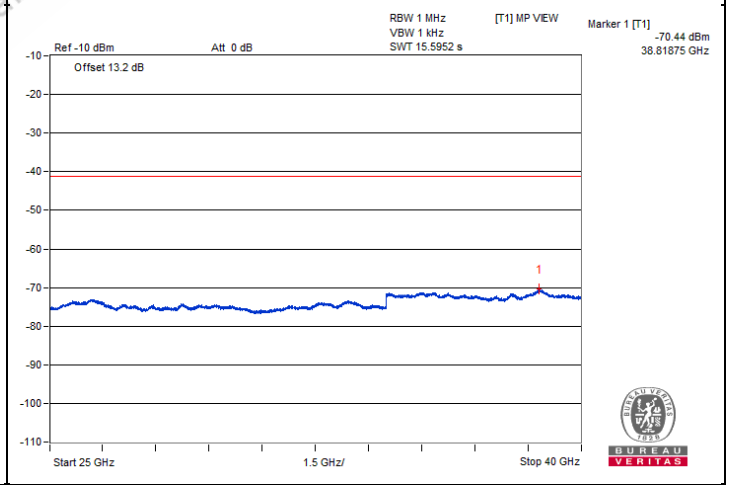



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

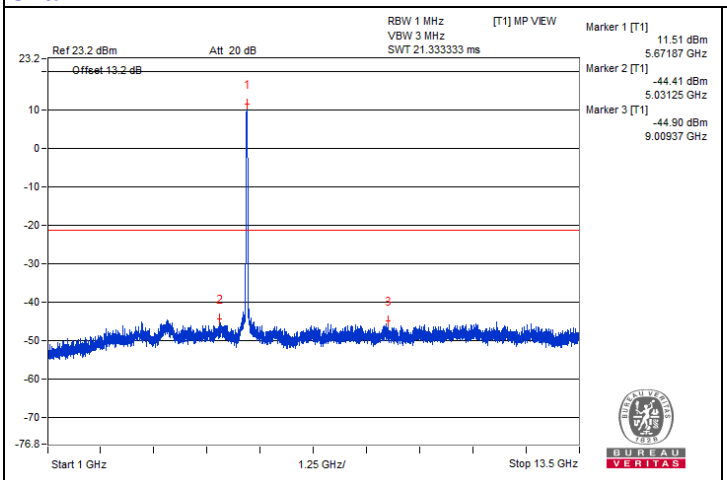


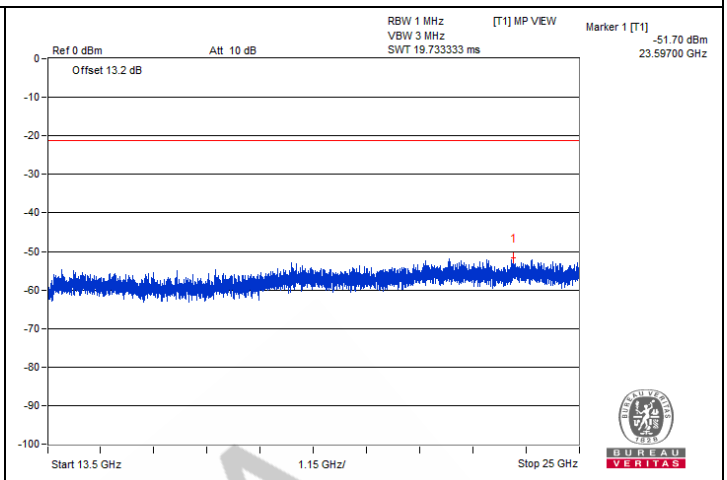

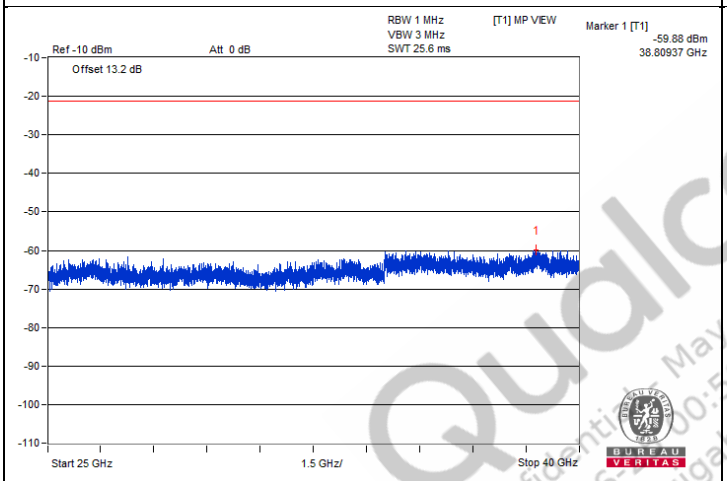

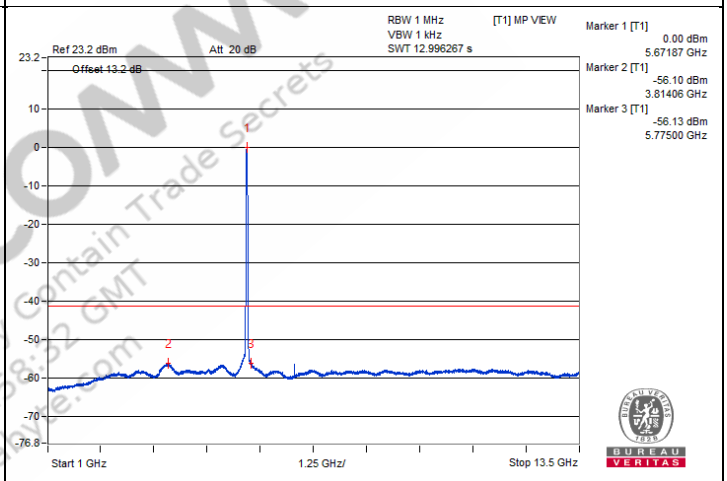

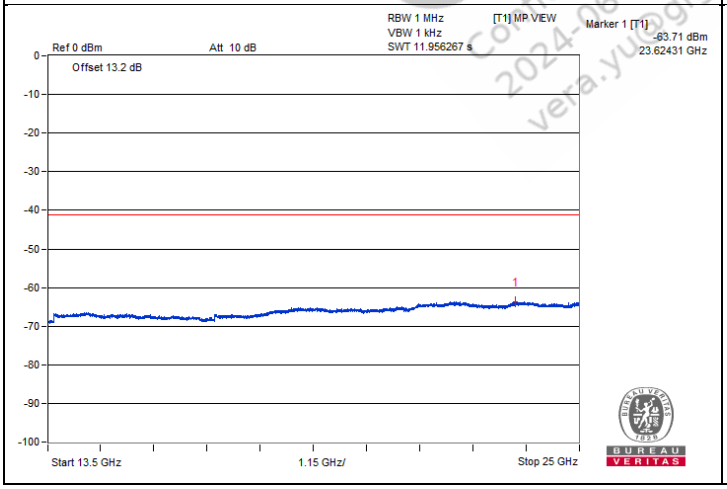

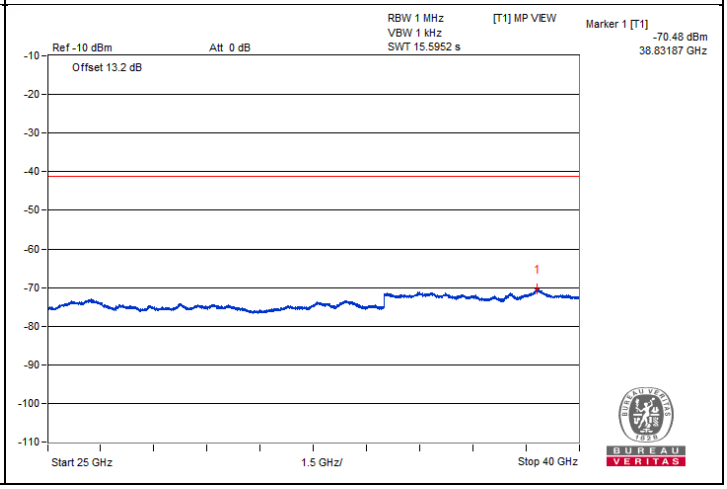

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5742.1	61.05 PK	68.2	-7.15	-47.8	-43.36	7.82	-34.21


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

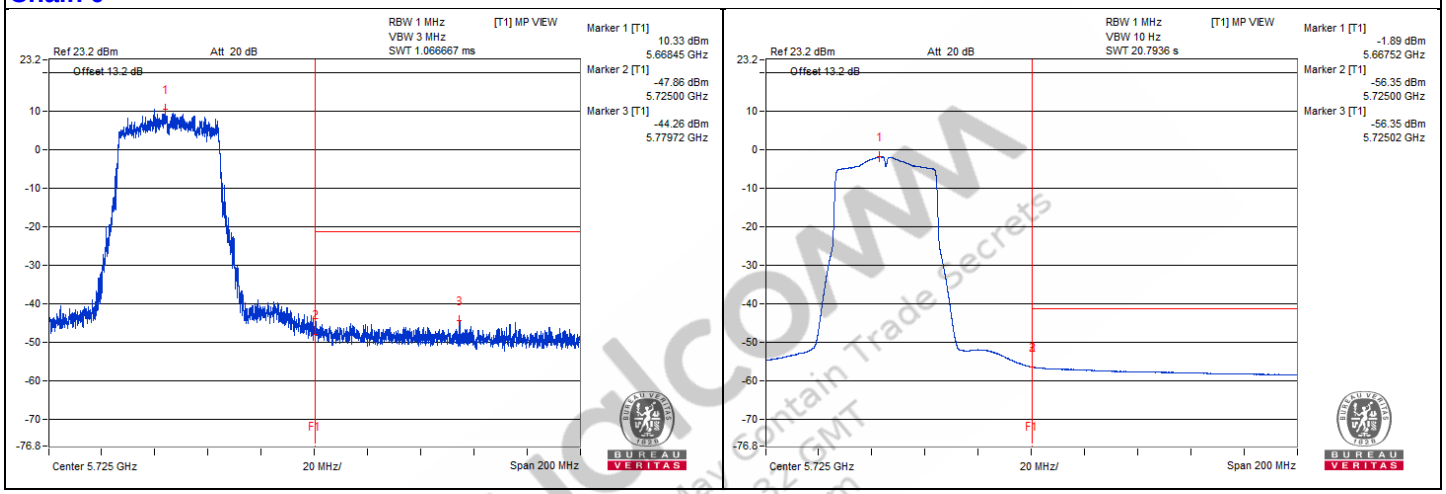

Chain 1

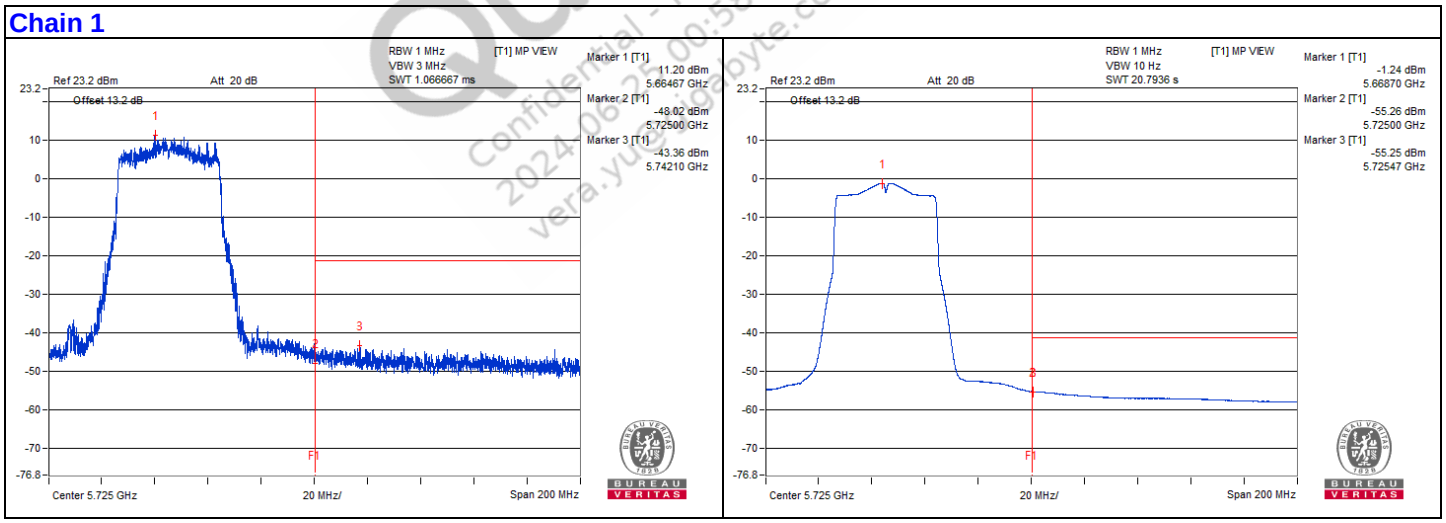

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

802.11be (EHT40) - Channel 142

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3789.06	60.74 PK	74	-13.26	-46.51	-45.01	8.17	-34.52
2	3818.75	50.3 AV	54	-3.7	-56.2	-56.08	8.17	-44.96
3	7606.25	58.63 PK	74	-15.37	-47.65	-47.98	8.17	-36.63
4	7617.18	47.98 AV	54	-6.02	-58.64	-58.28	8.17	-47.28
5	11434.37	59.45 PK	74	-14.55	-46.47	-47.59	8.17	-35.81
6	11421.87	48.5 AV	54	-5.5	-58	-57.89	8.17	-46.76
7	#17111	50.1 PK	68.2	-18.1	-56.03	-56.67	8.17	-45.16


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

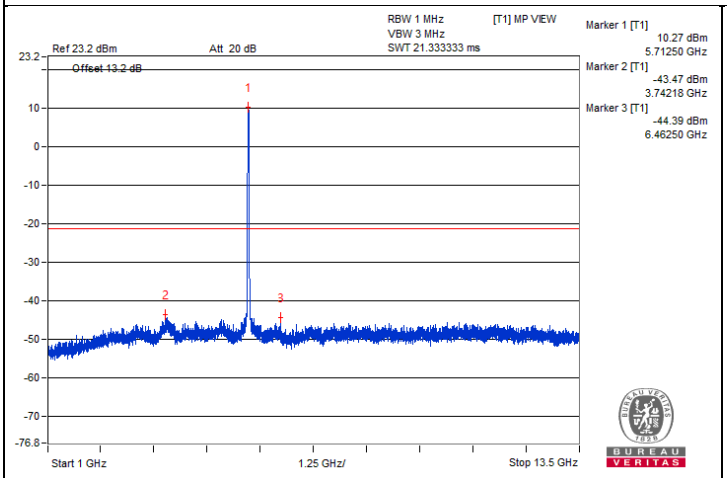


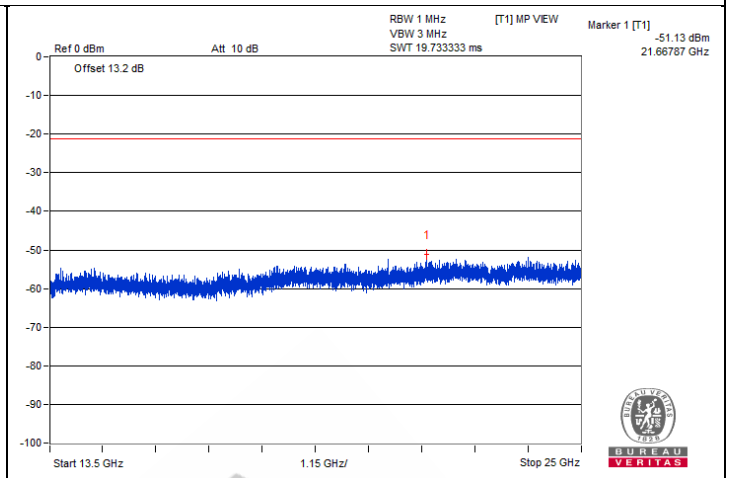

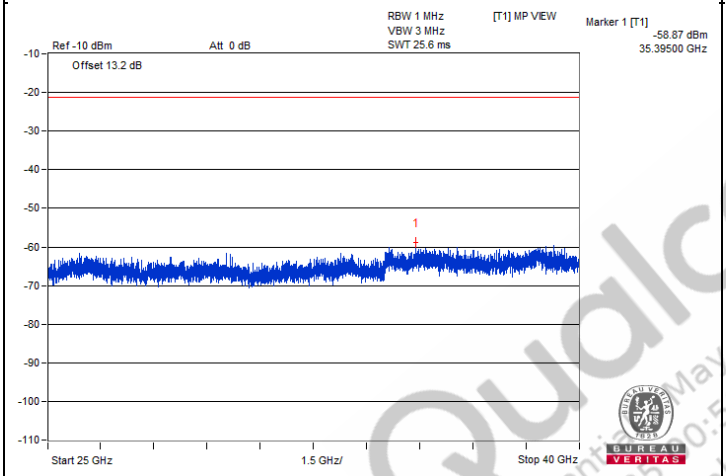

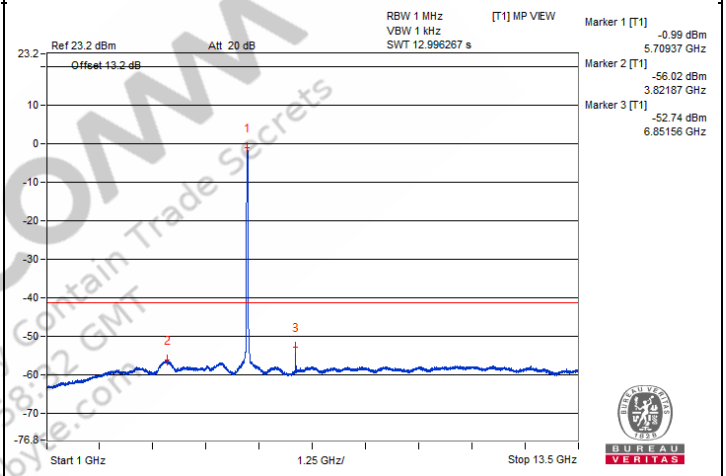


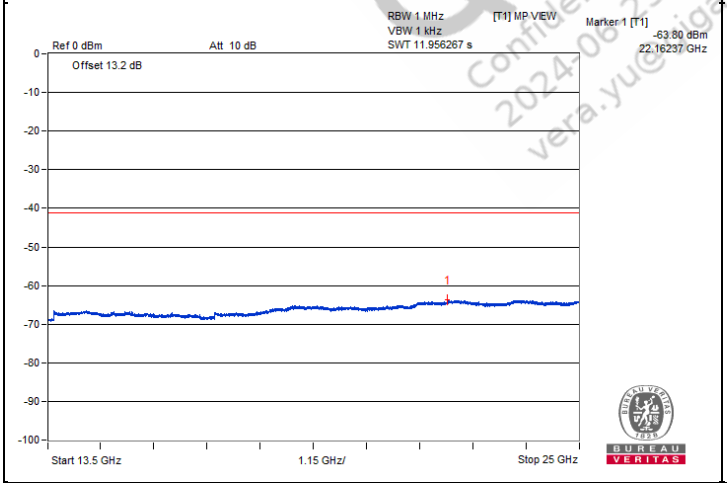


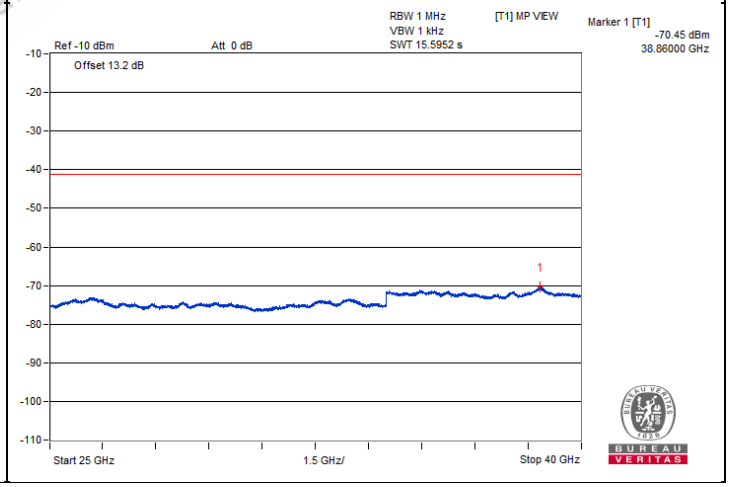



QualcOMM
Confidential – May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gabyte.com


Chain 1

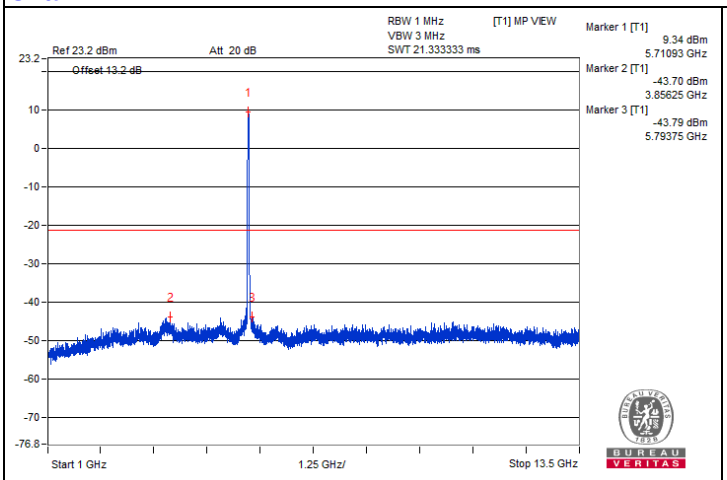


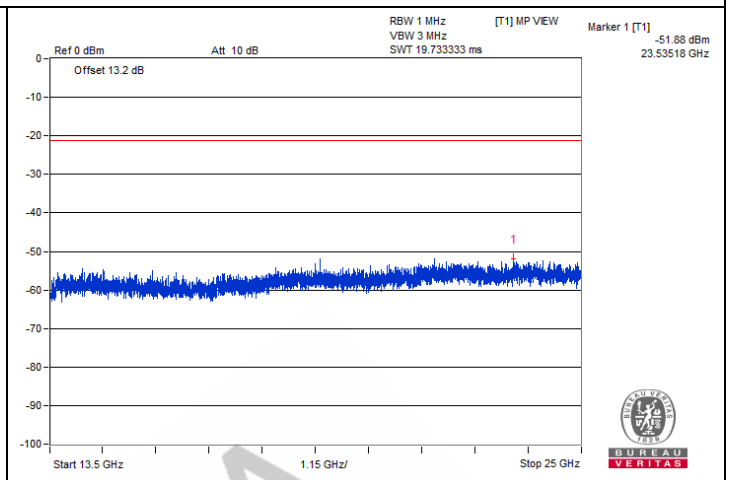

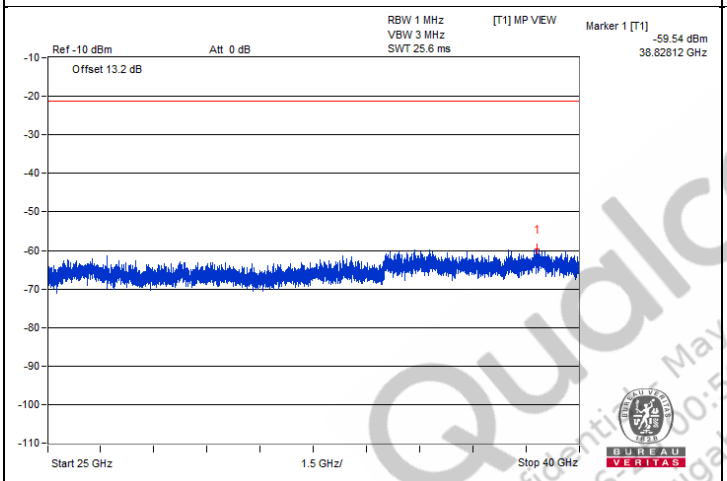

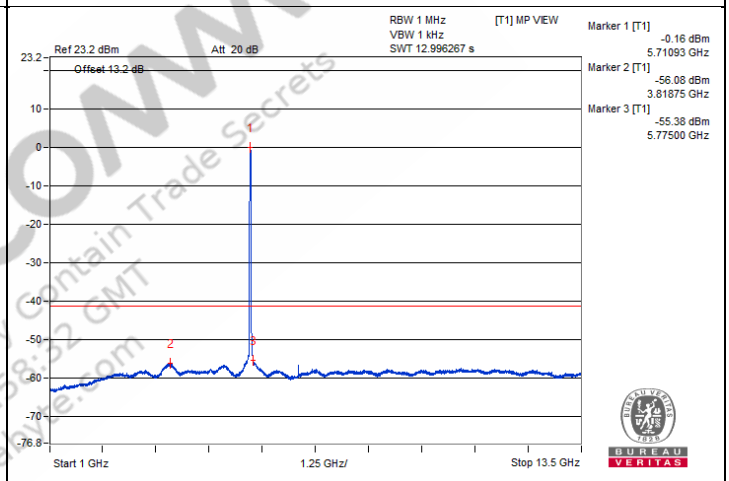

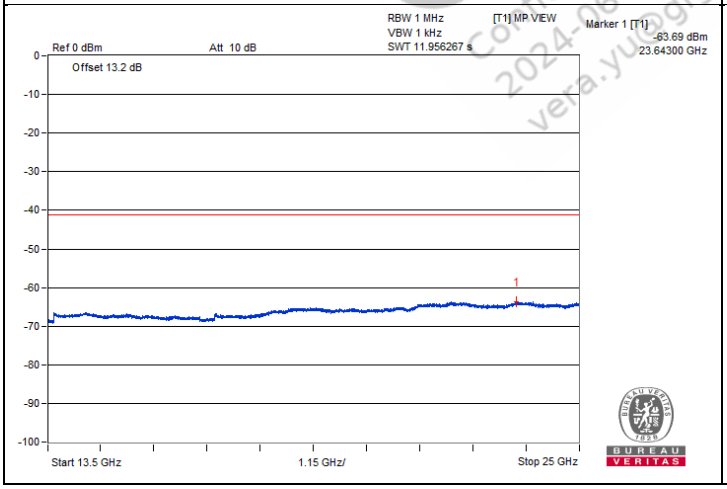

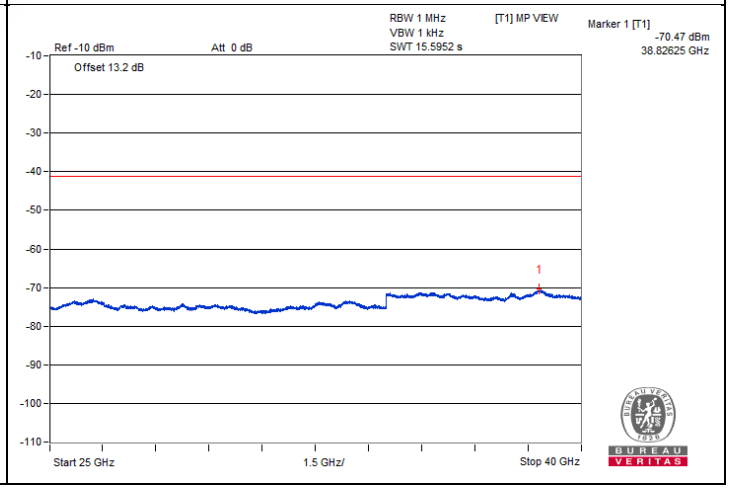

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 10:58:32 GMT
vera.yu@bgatvre.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5867.23	59.78 PK	68.2	-8.42	-47.55	-45.35	7.82	-35.48


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

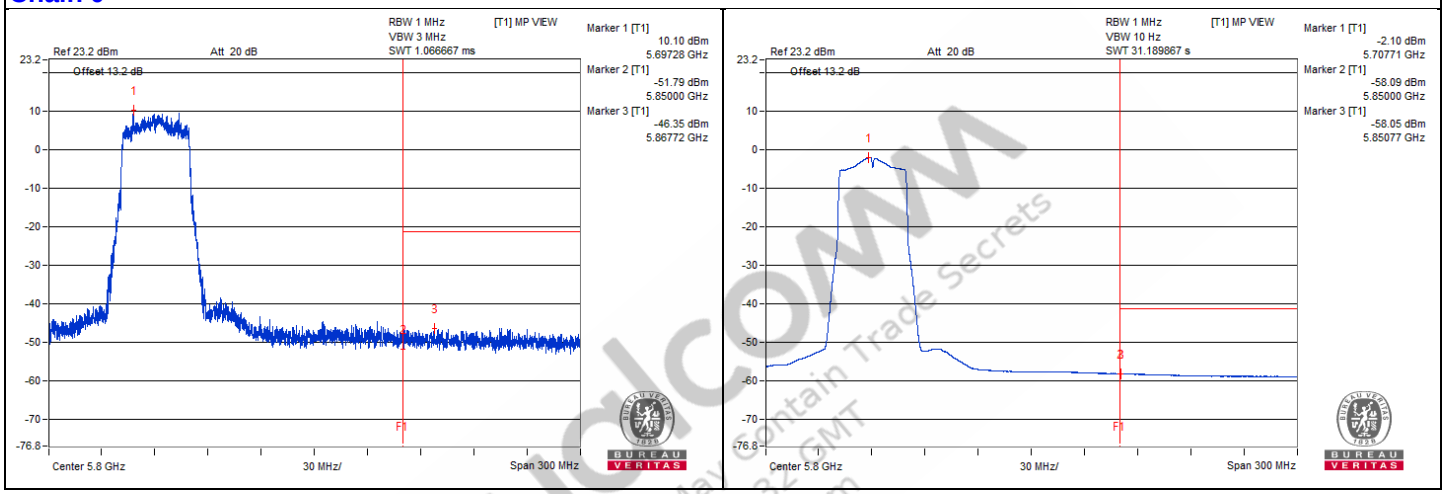

Chain 1

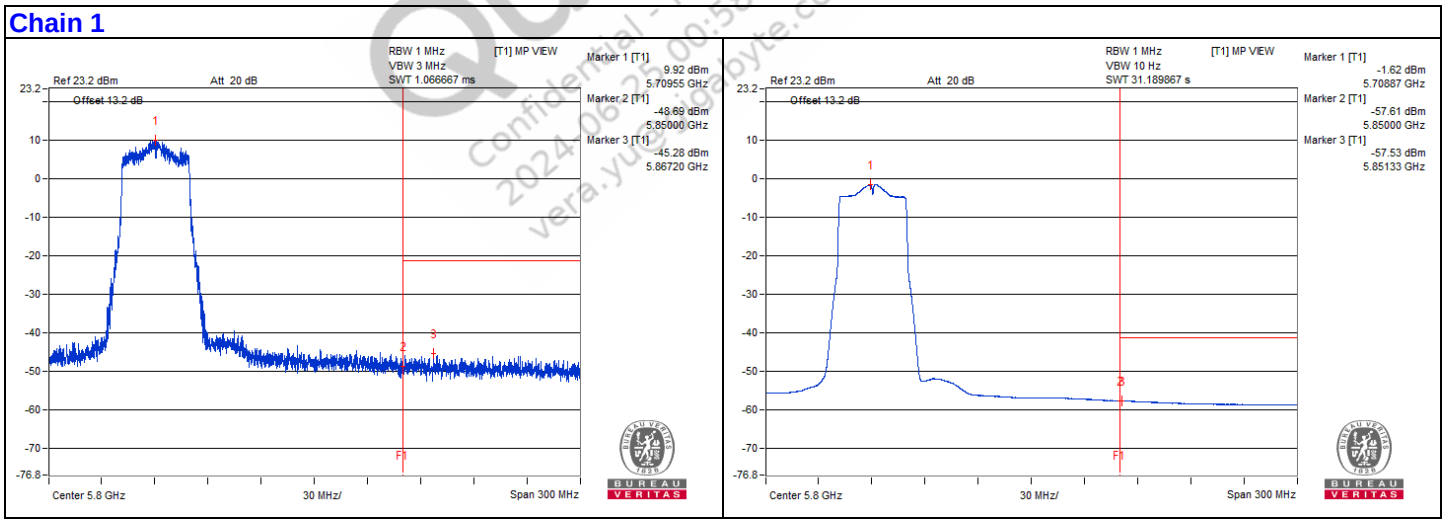

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

802.11be (EHT40) – Channel 151

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3842.18	61.81 PK	74	-12.19	-44.16	-45.16	8.17	-33.45
2	3840.62	50.04 AV	54	-3.96	-56.45	-56.36	8.17	-45.22
3	7670.31	59.33 PK	74	-14.67	-47.09	-47.13	8.17	-35.93
4	7657.81	48.11 AV	54	-5.89	-58.49	-58.18	8.17	-47.15
5	11504.68	59.49 PK	74	-14.51	-47.11	-46.79	8.17	-35.77
6	11493.75	48.61 AV	54	-5.39	-57.77	-57.9	8.17	-46.65
7	#17277.75	48.89 PK	68.2	-19.31	-56.86	-58.37	8.17	-46.37


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

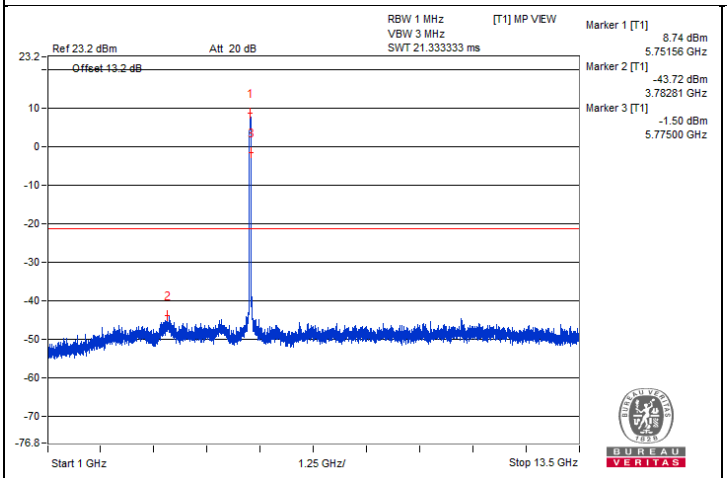


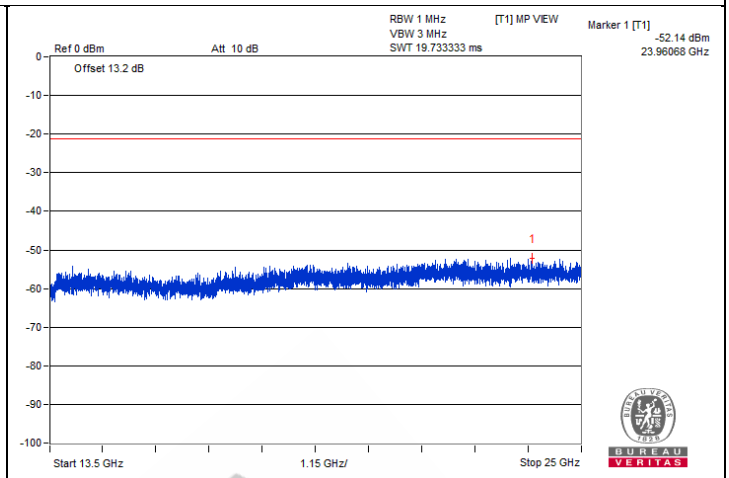

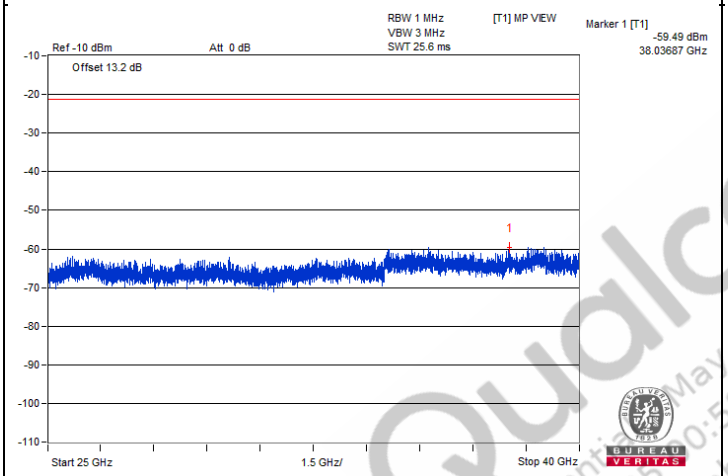

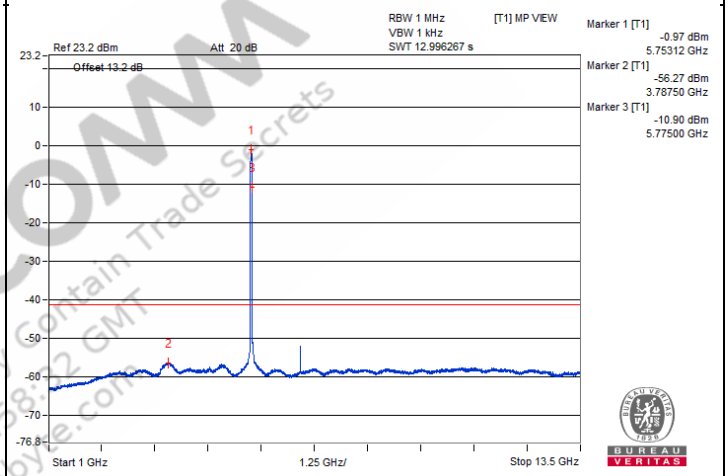


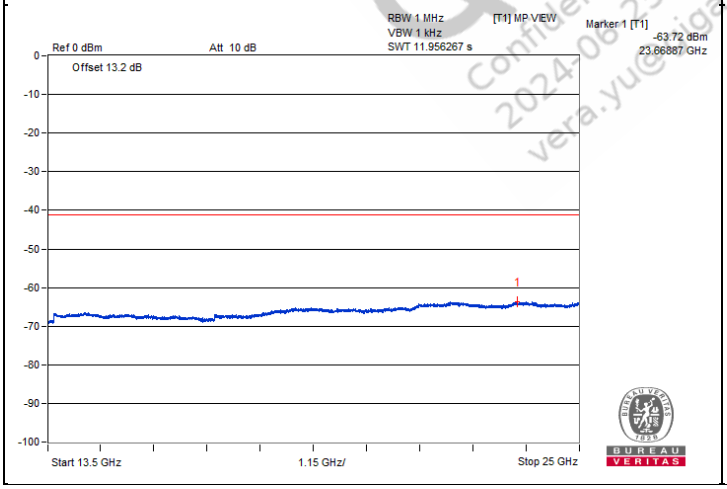


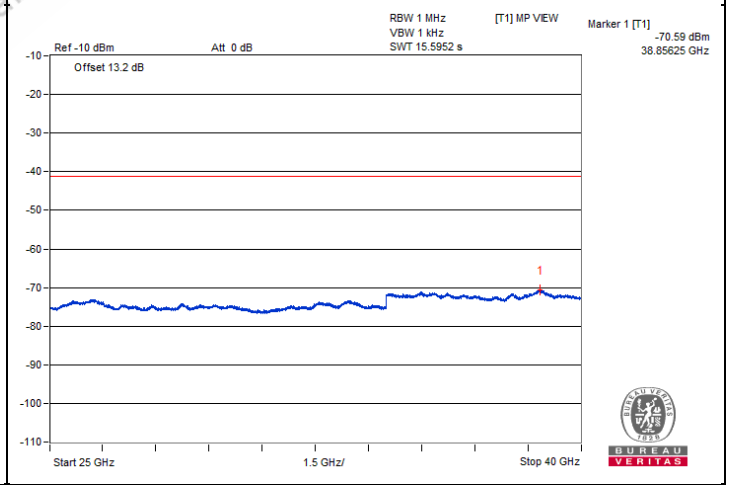



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:02 GMT
vera.yue@gigabyte.com


Chain 1

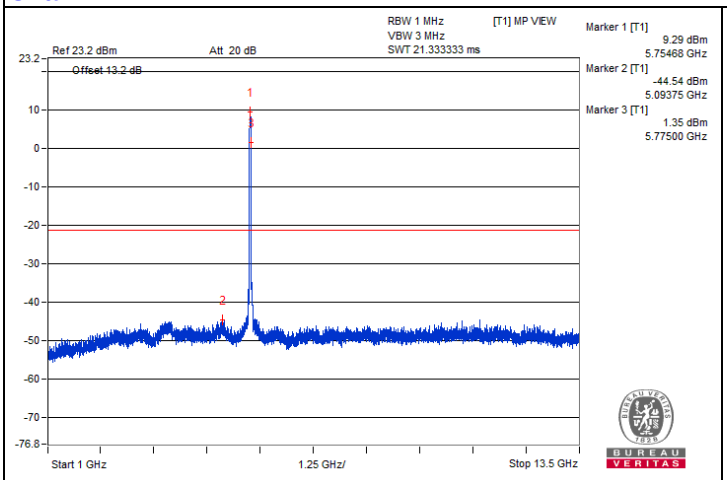


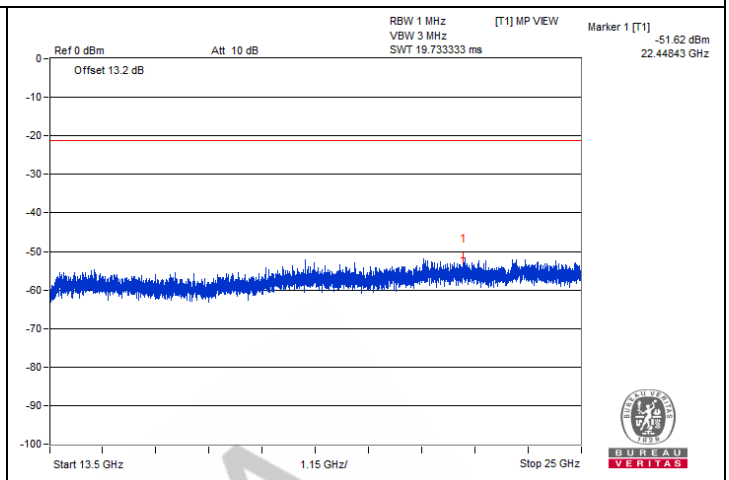

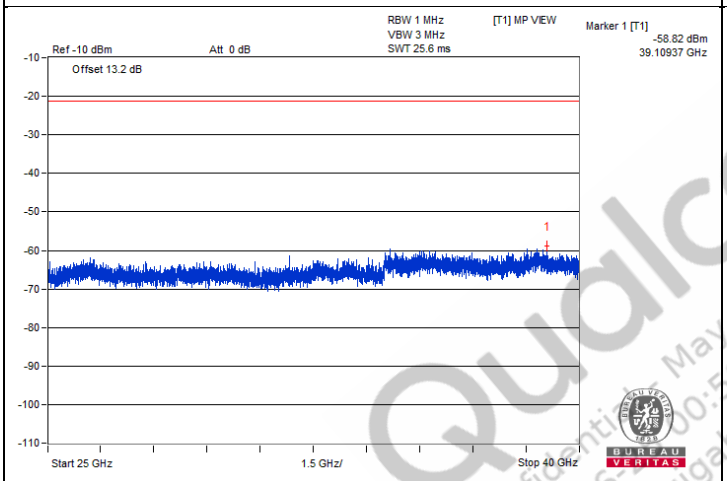

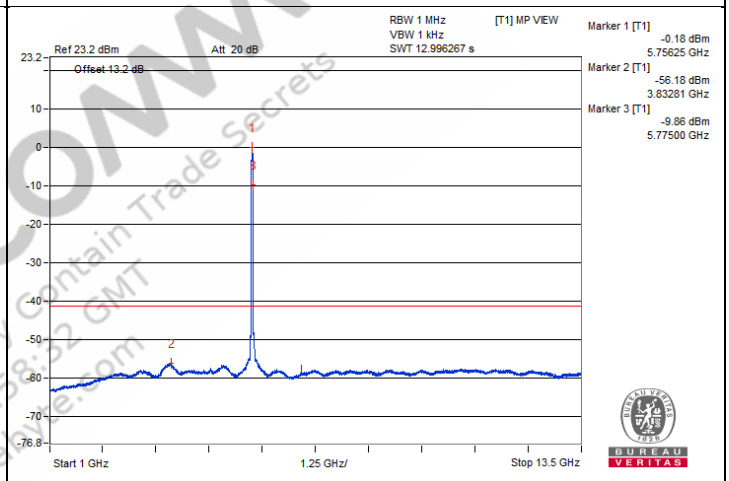

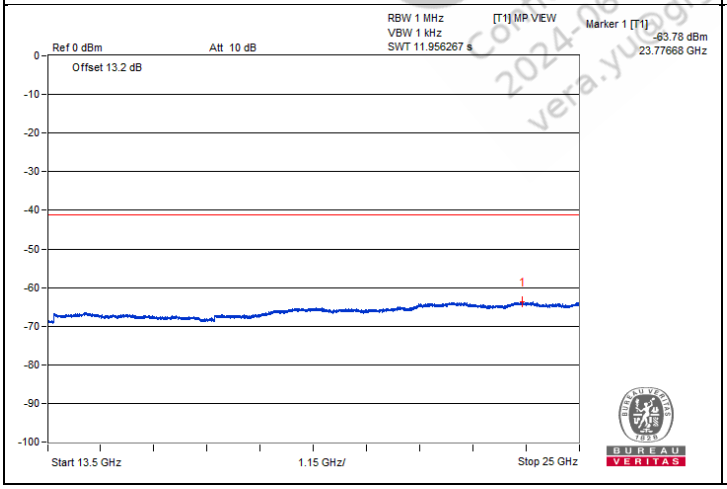


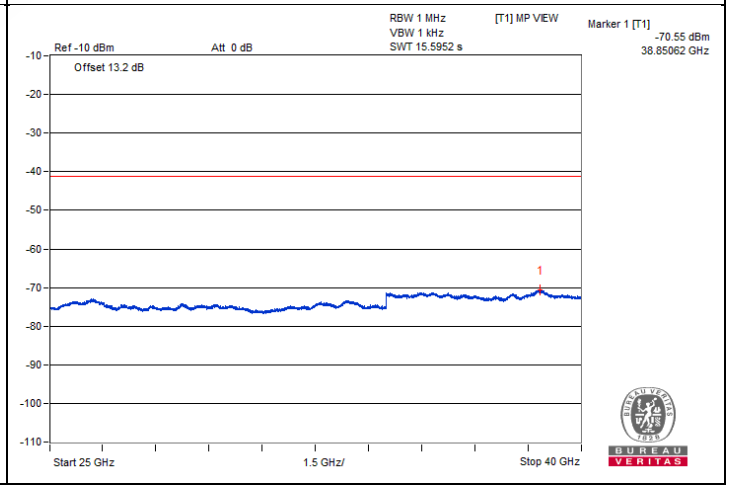

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

Chain 0

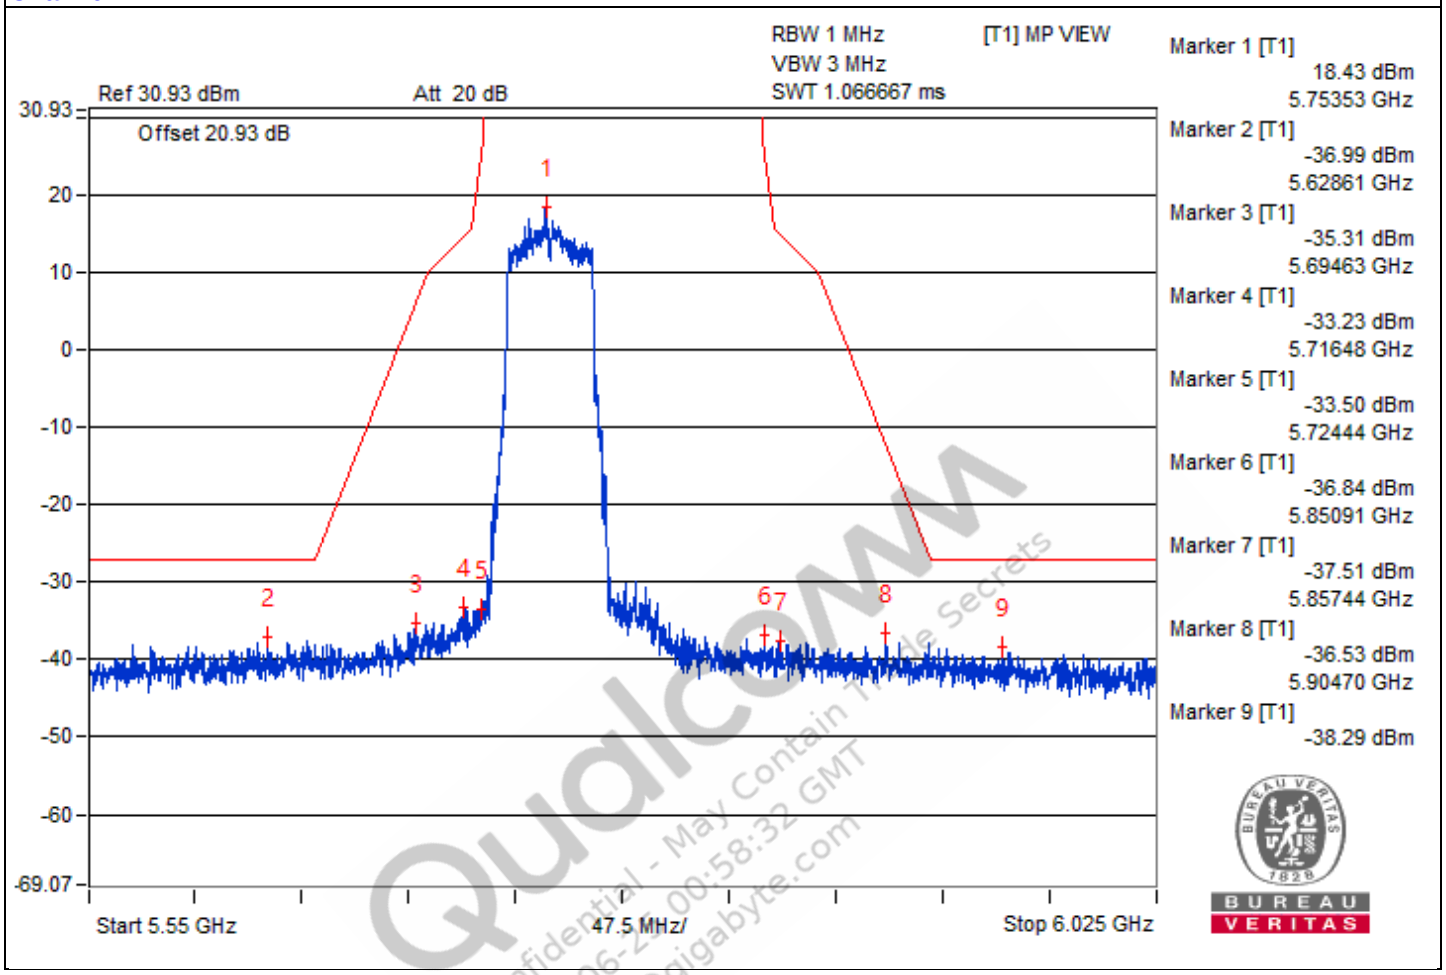

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

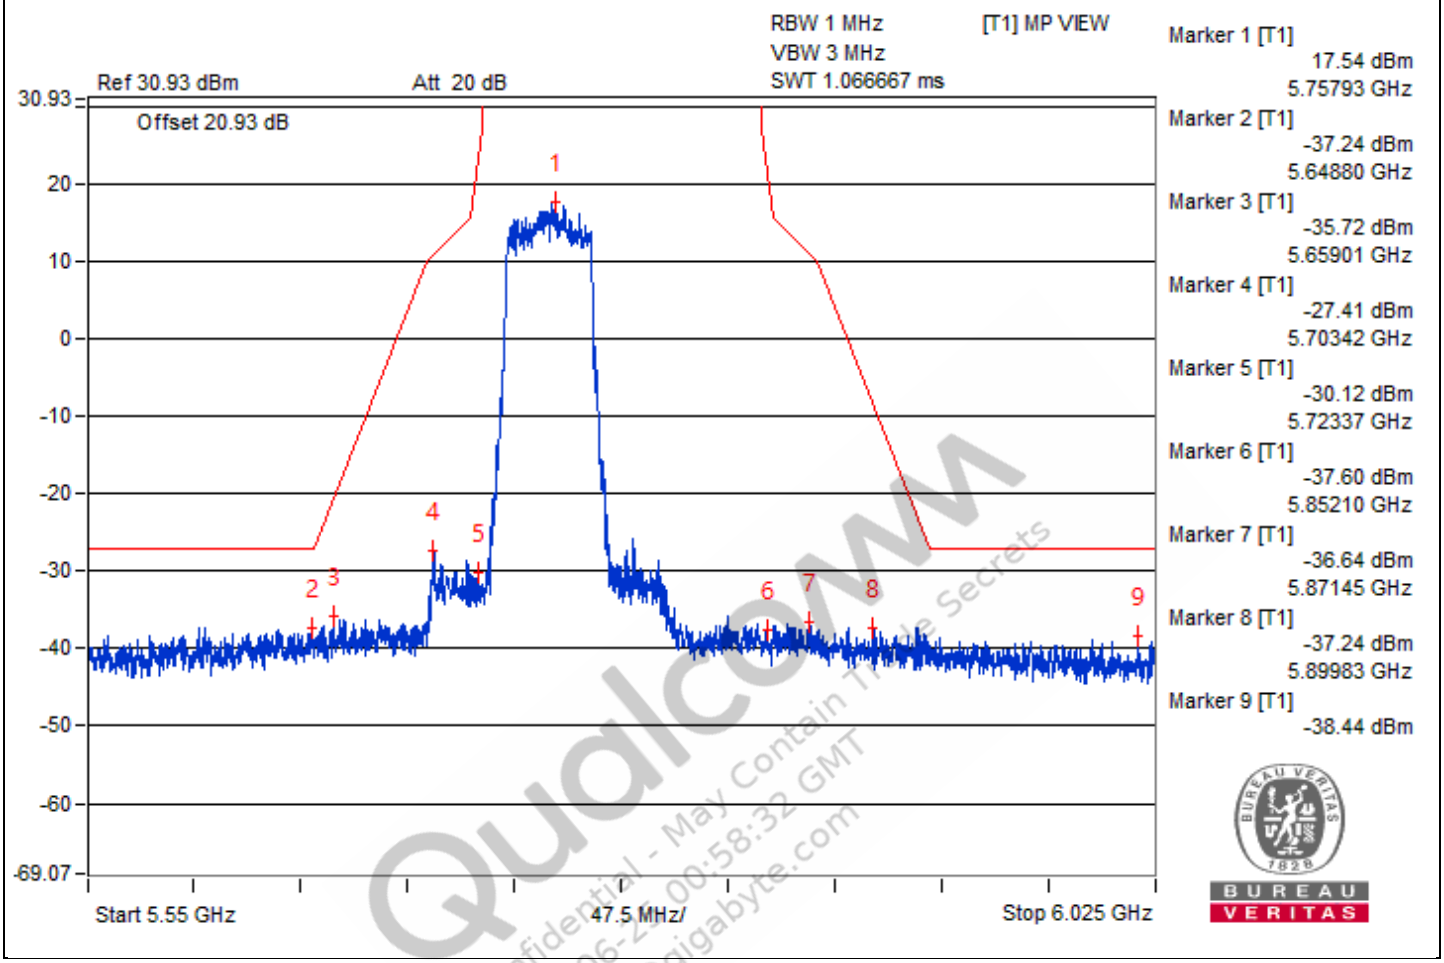

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT40) – Channel 159

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3870.31	60.08 PK	74	-13.92	-46.08	-46.67	8.17	-35.18
2	3854.68	49.95 AV	54	-4.05	-56.41	-56.57	8.17	-45.31
3	7739.06	58.92 PK	74	-15.08	-49.92	-45.98	8.17	-36.34
4	7745.31	48.27 AV	54	-5.73	-58.06	-58.28	8.17	-46.99
5	11604.68	59.32 PK	74	-14.68	-48.03	-46.37	8.17	-35.94
6	11582.81	48.35 AV	54	-5.65	-58.11	-58.08	8.17	-46.91
7	#17395.62	49.07 PK	68.2	-19.13	-59.42	-55.99	8.17	-46.19


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

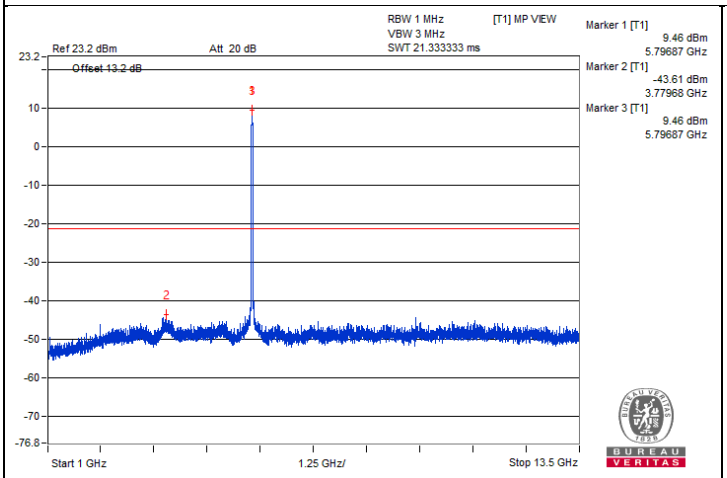


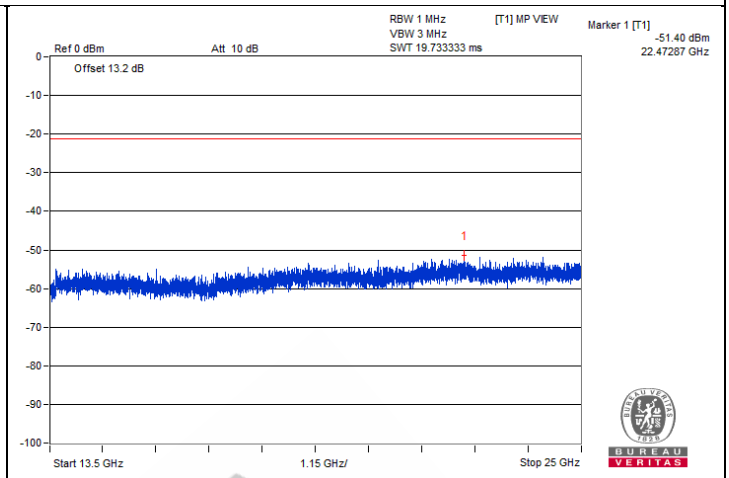

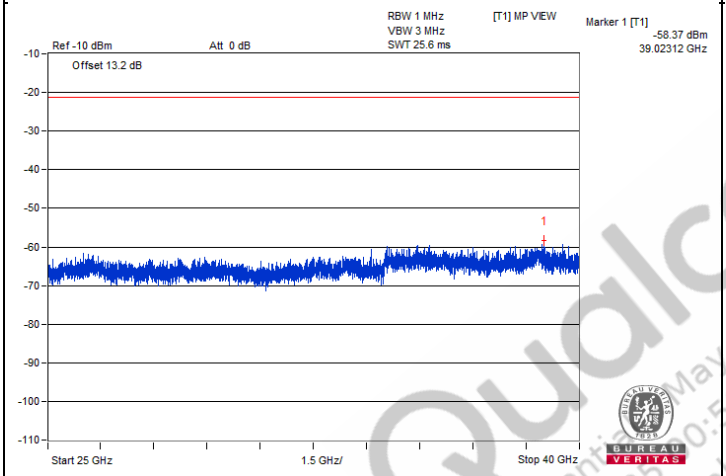

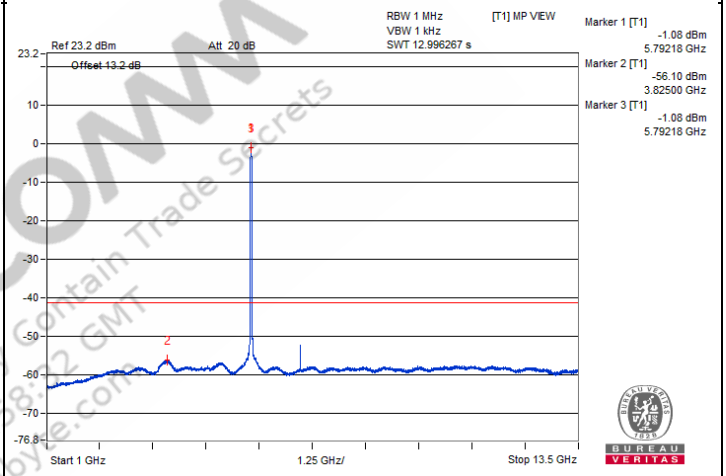


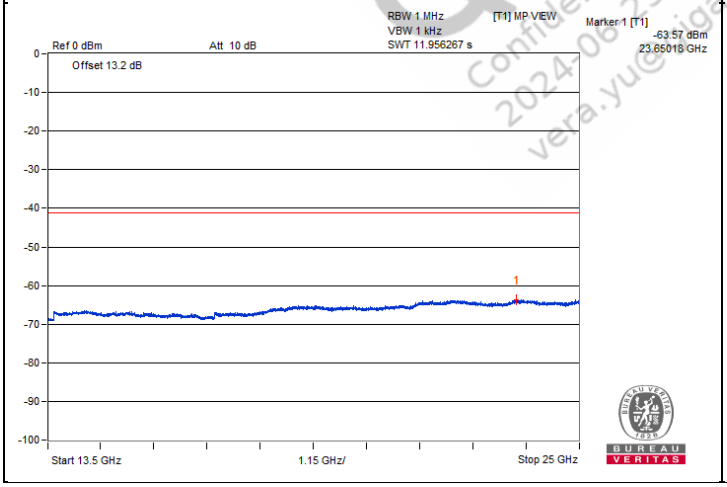


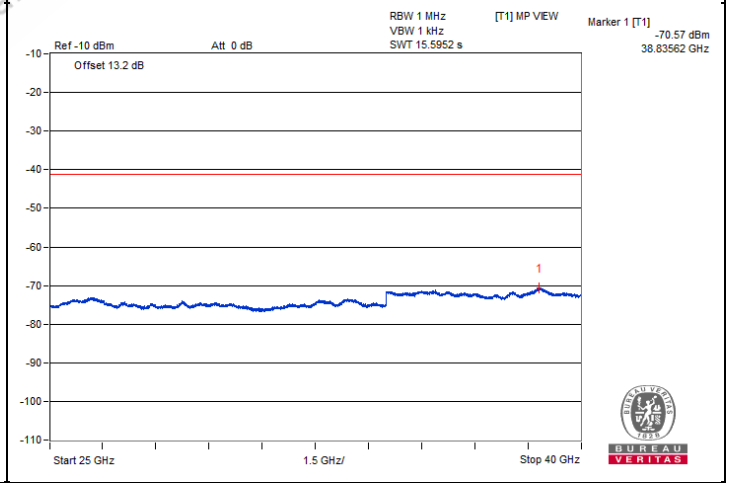



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

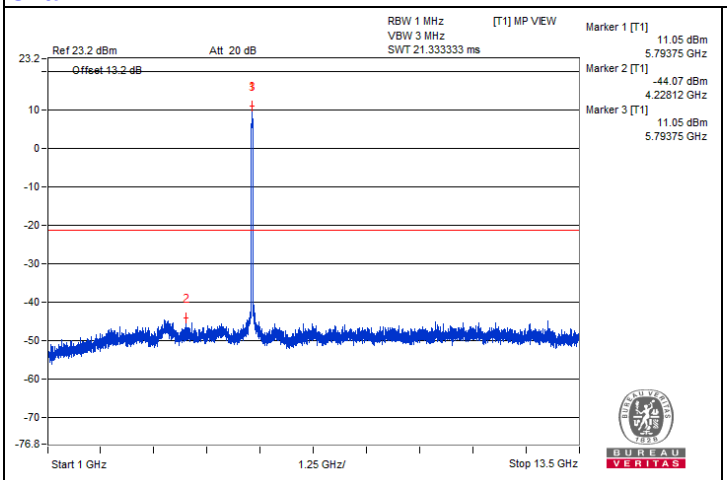


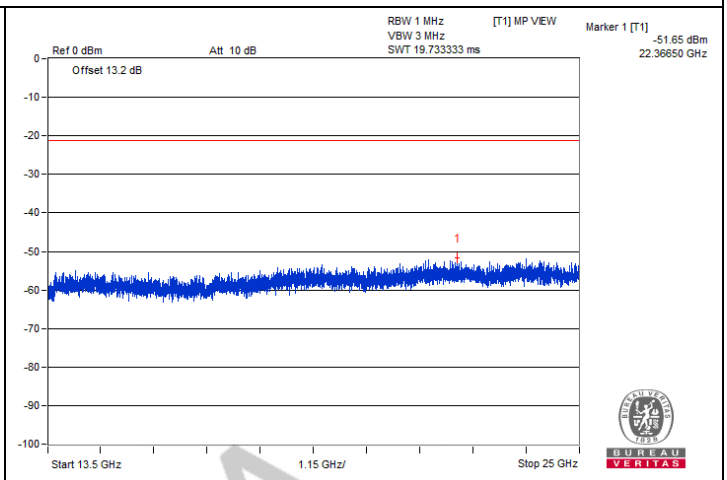

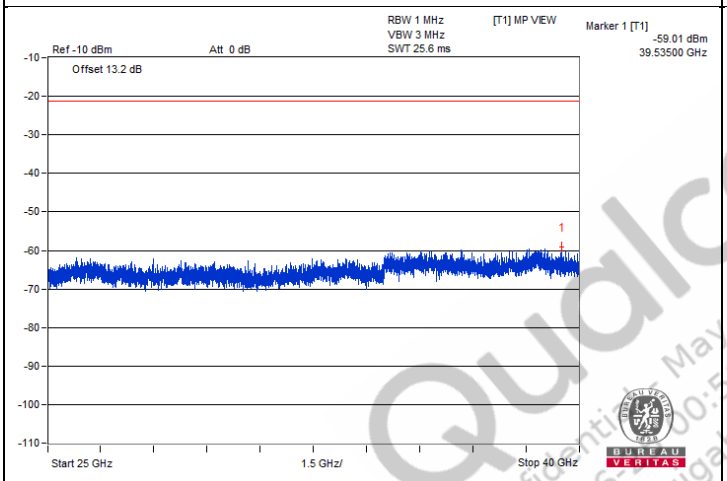

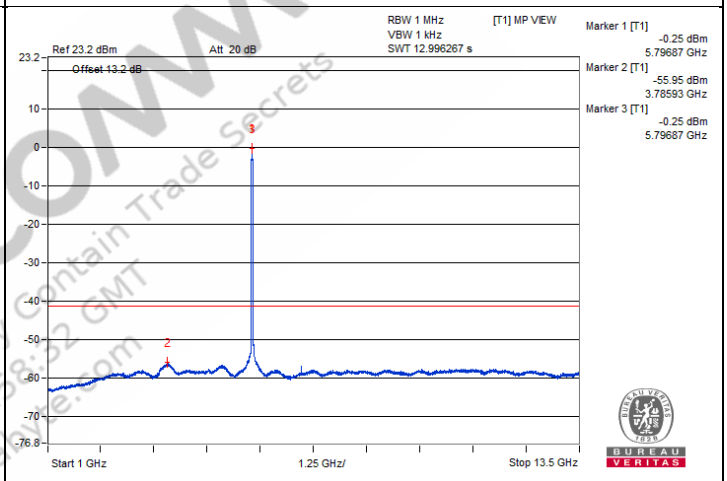

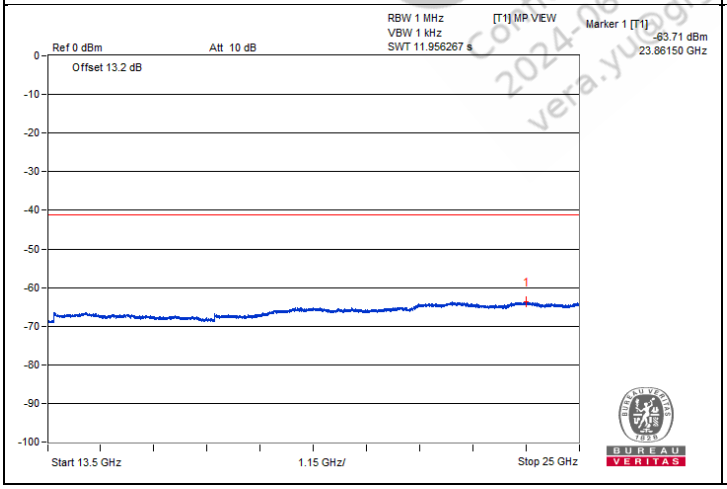


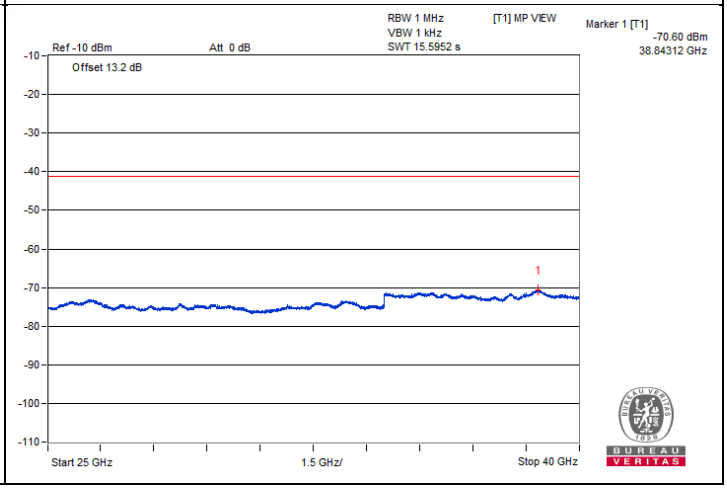

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

Chain 0

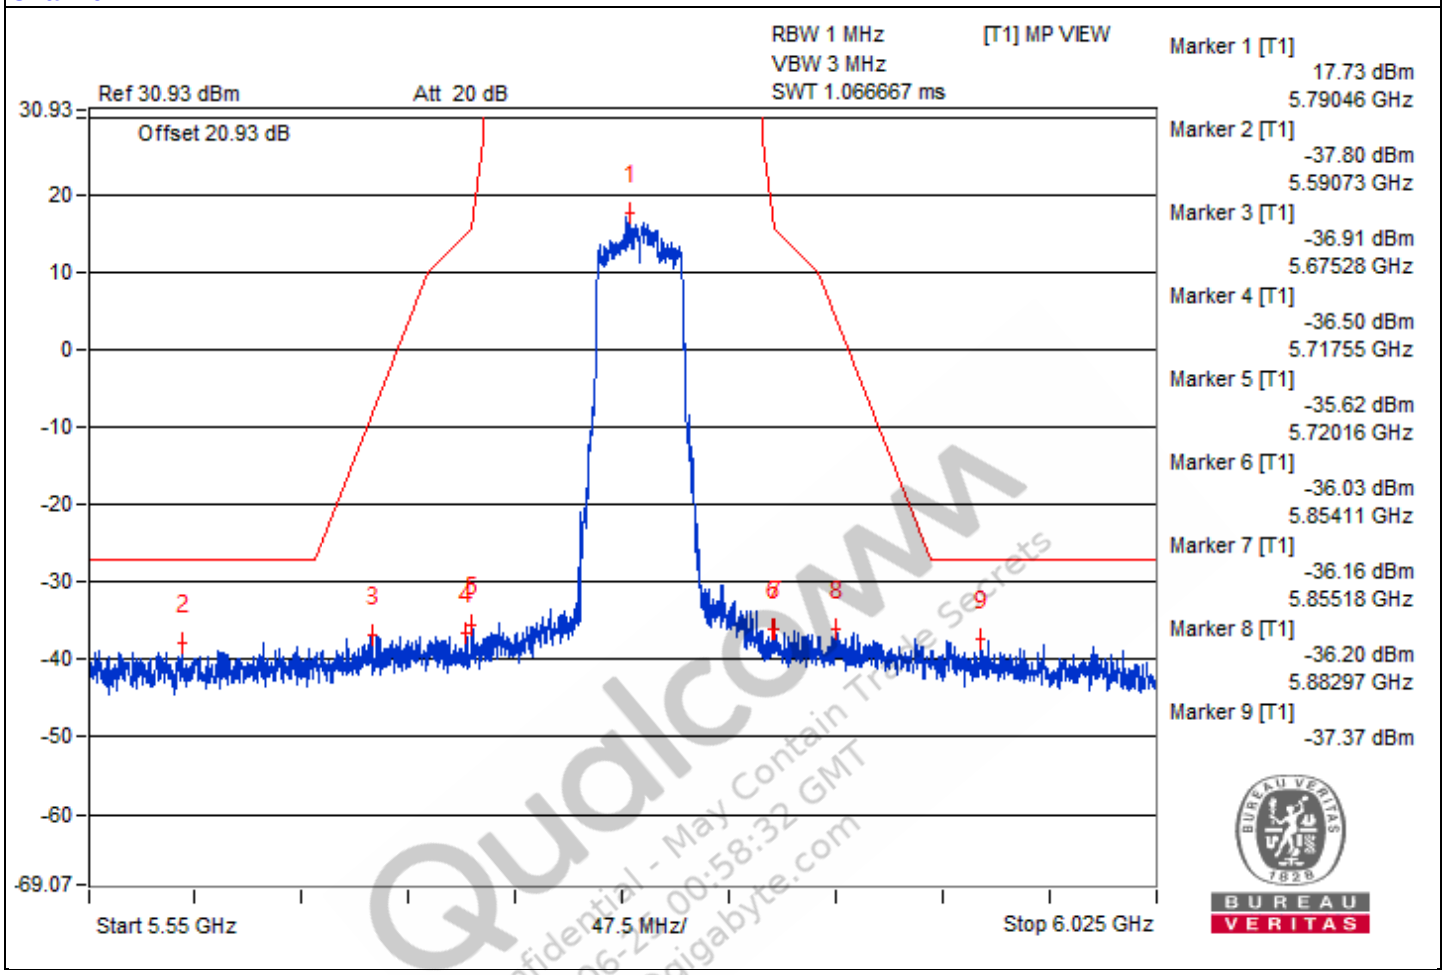

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

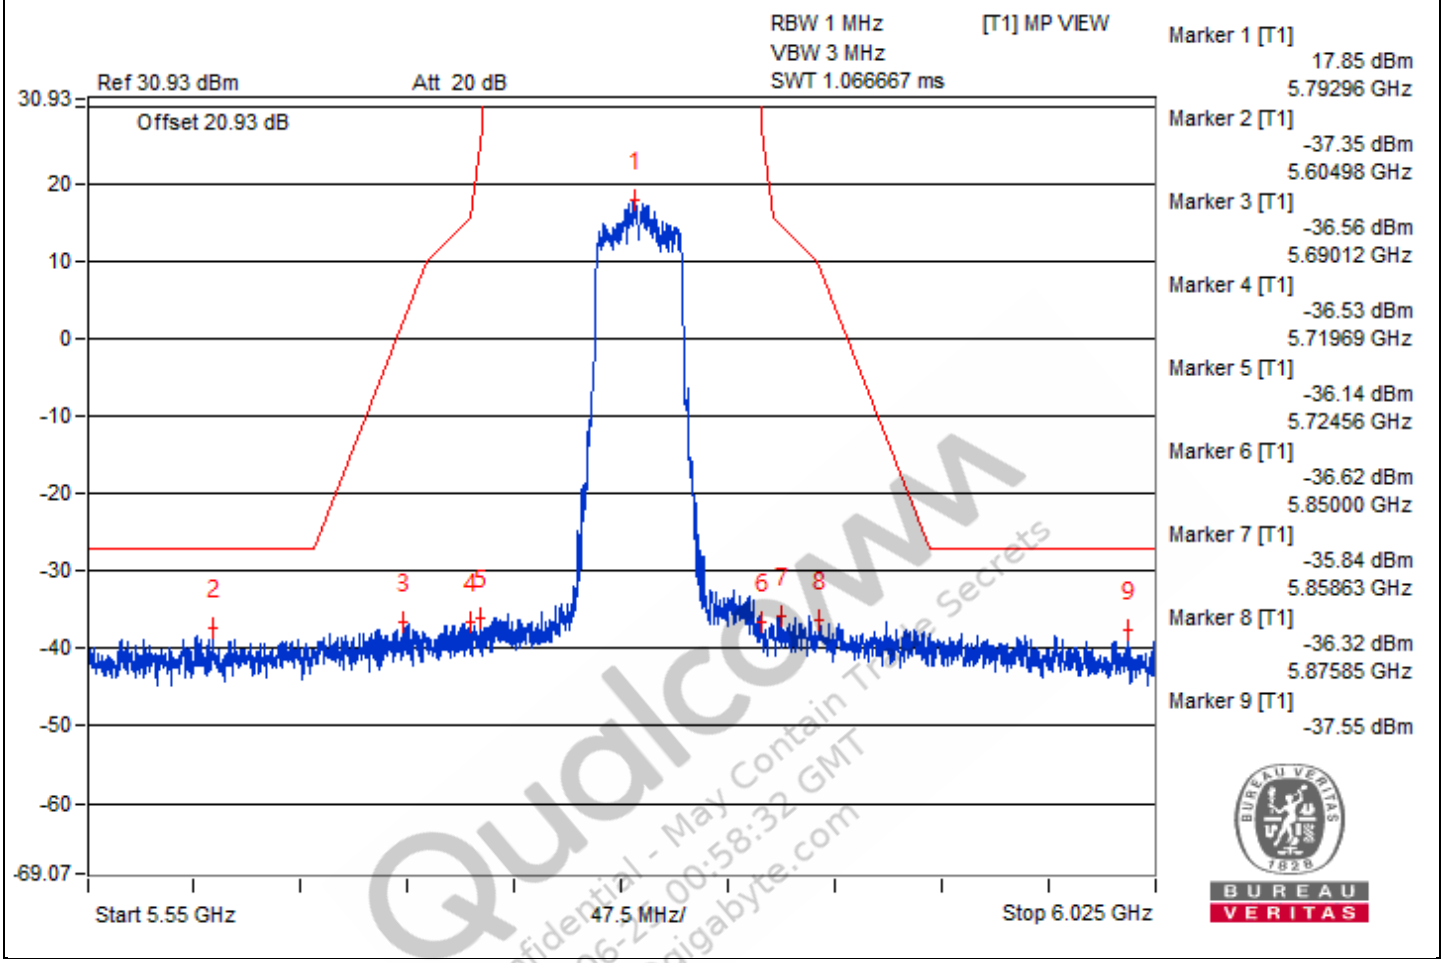

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT80) - Channel 42

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3479.68	58.32 PK	68.2	-9.88	-48.11	-48.14	8.17	-36.94
2	#6956.25	58.29 PK	68.2	-9.91	-50.13	-46.8	8.17	-36.97
3	#10414.06	59.72 PK	68.2	-8.48	-46.68	-46.76	8.17	-35.54
4	15639	48.76 PK	74	-25.24	-58	-57.38	8.17	-46.50
5	15647.62	39.09 AV	54	-14.91	-67.36	-67.34	8.17	-56.17


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

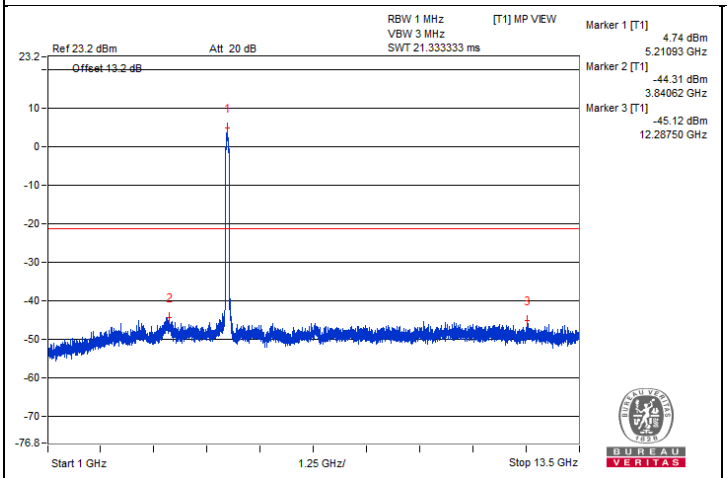


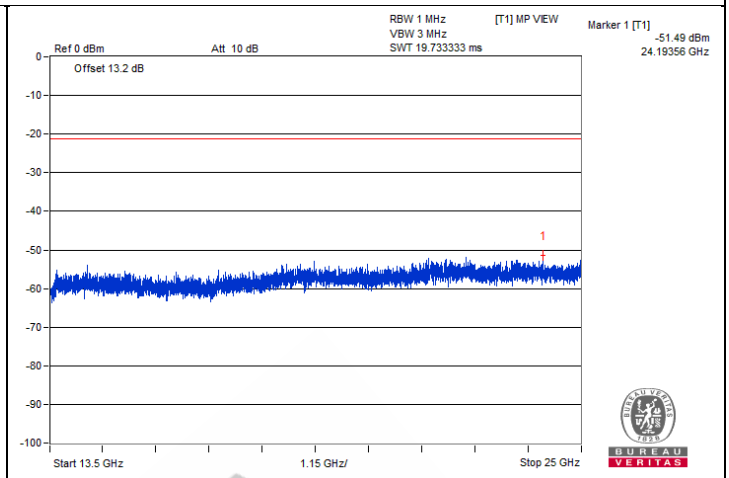

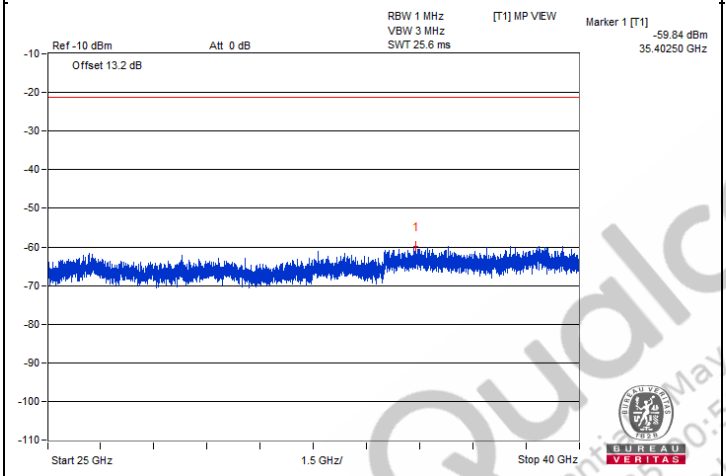

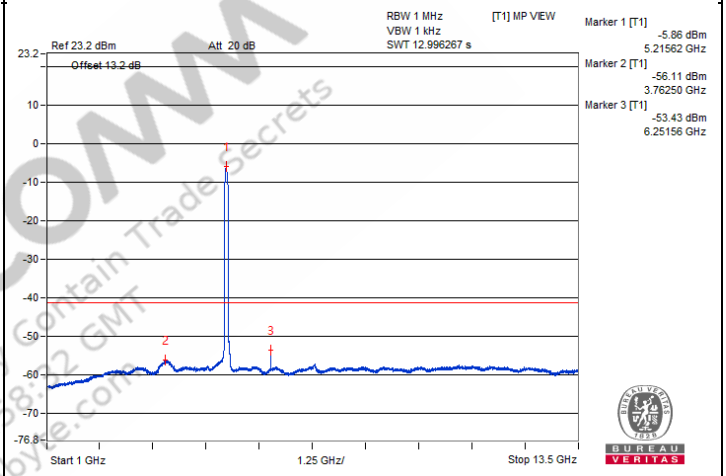


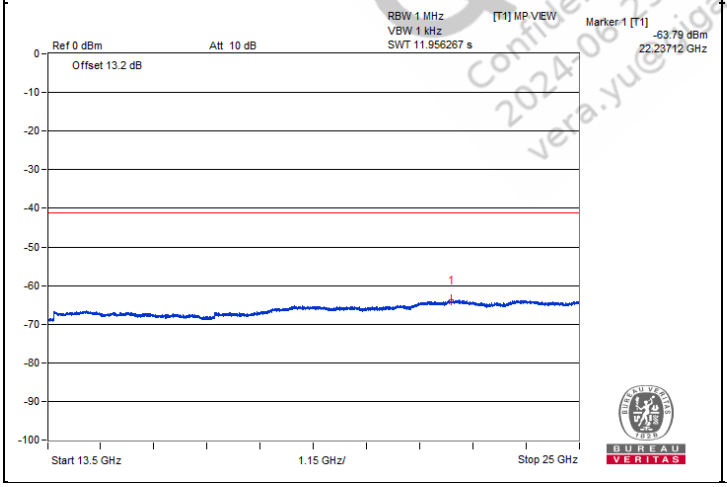


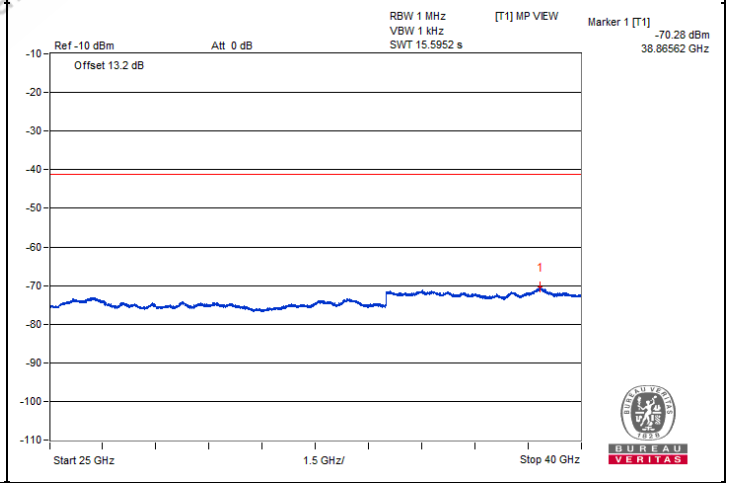



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

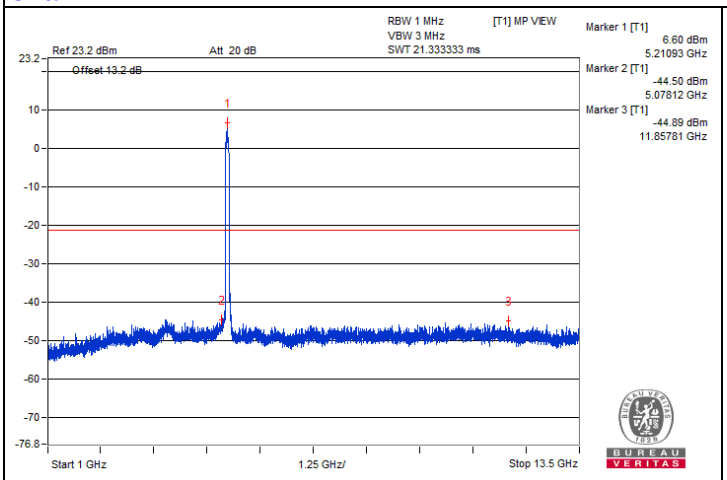


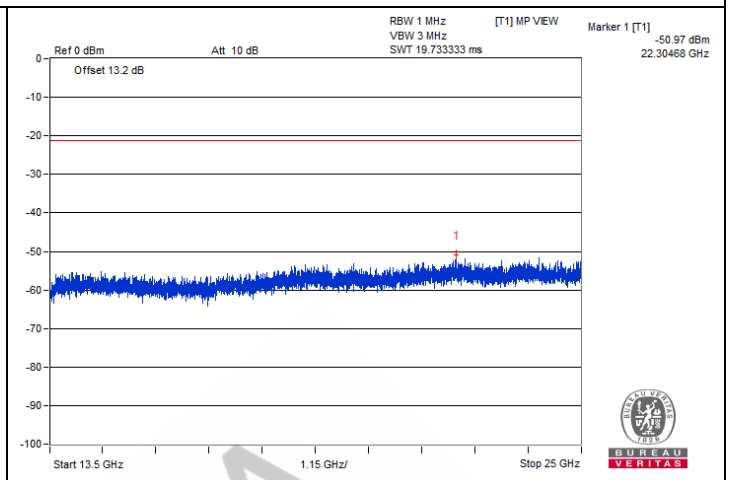

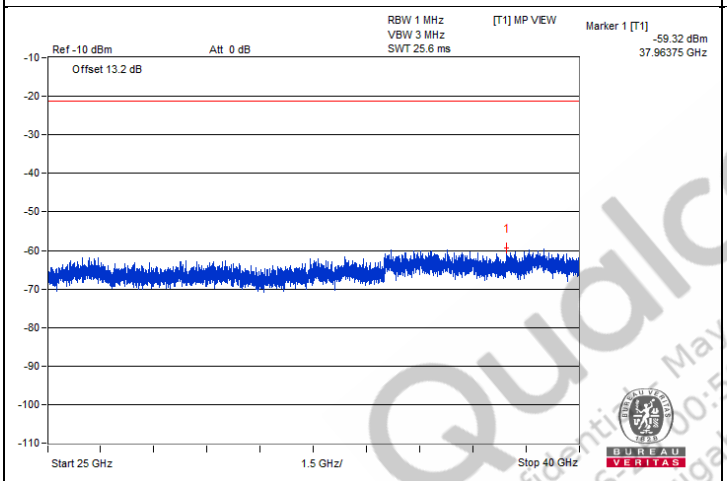

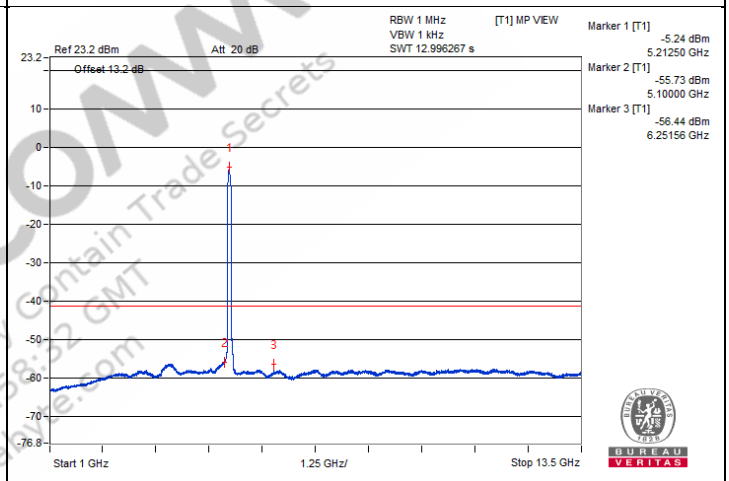

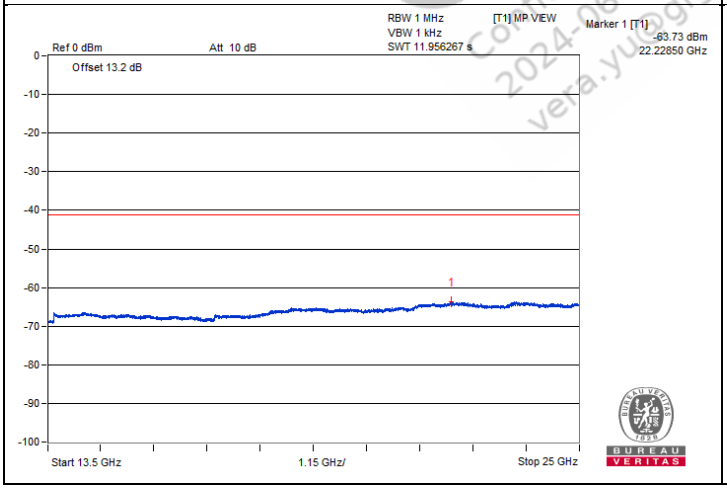

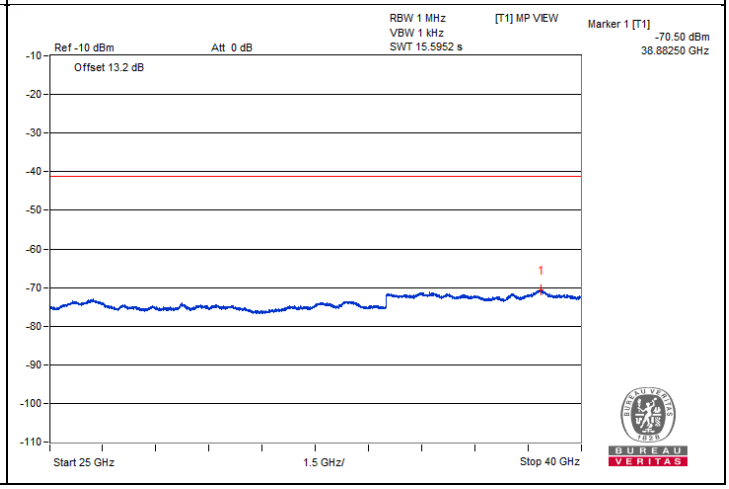

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5145.1	67.54 PK	74	-6.46	-45.19	-34.43	6.36	-27.72
2	5149.95	51.91 AV	54	-2.09	-53.97	-51.75	6.36	-43.35

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

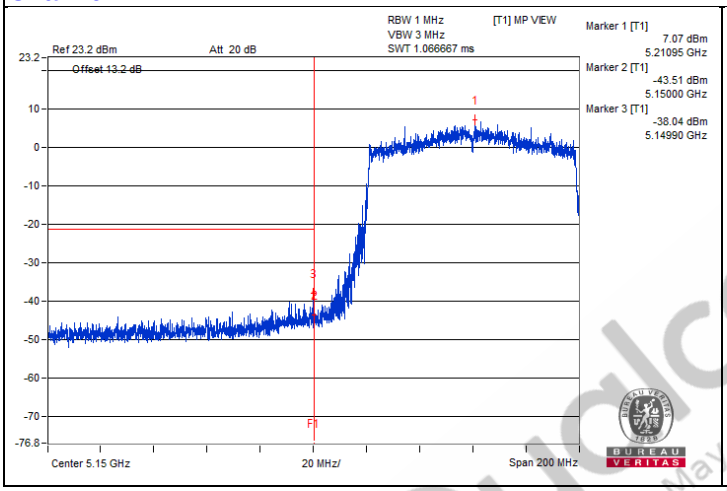

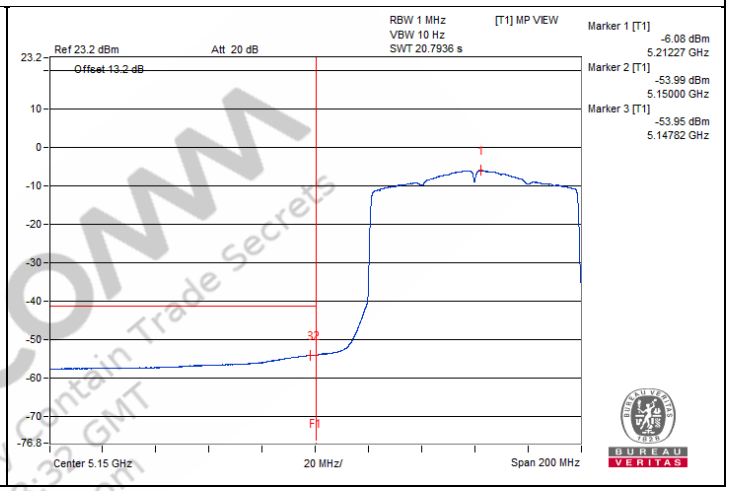

Chain 1

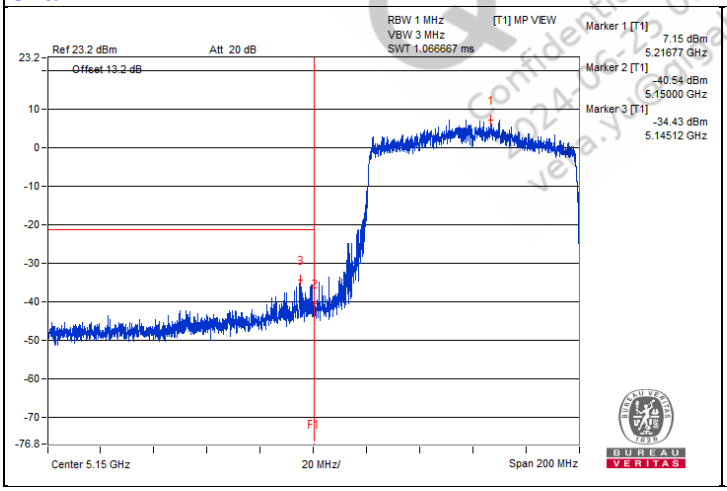

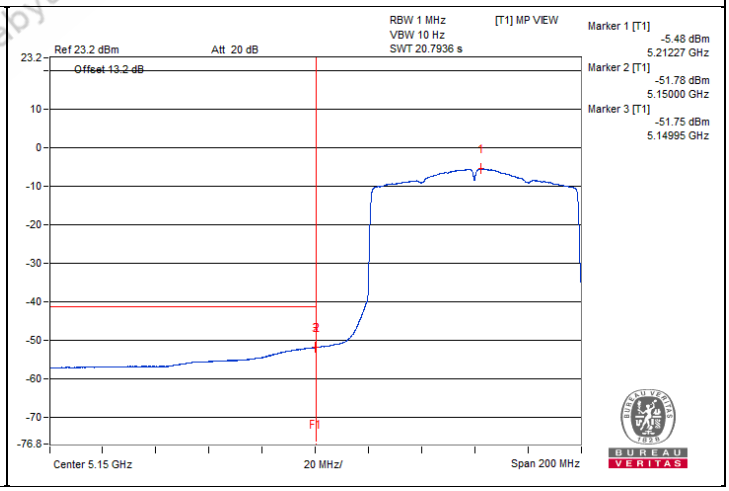

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yang@cybyte.com

802.11be (EHT80) - Channel 58

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3526.56	58.97 PK	74	-15.03	-48.45	-46.67	8.17	-36.29
2	3534.37	47.24 AV	54	-6.76	-59.29	-59.11	8.17	-48.02
3	#7065.62	58.46 PK	68.2	-9.74	-47.33	-48.75	8.17	-36.80
4	#10592.18	59.07 PK	68.2	-9.13	-48.86	-46.27	8.17	-36.19
5	15854.62	48.1 PK	74	-25.9	-60.55	-56.88	8.17	-47.16
6	15889.12	38.8 AV	54	-15.2	-67.69	-67.6	8.17	-56.46


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

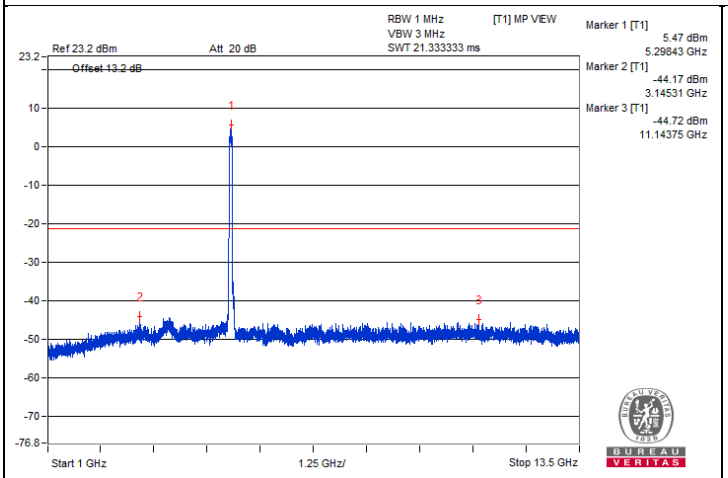


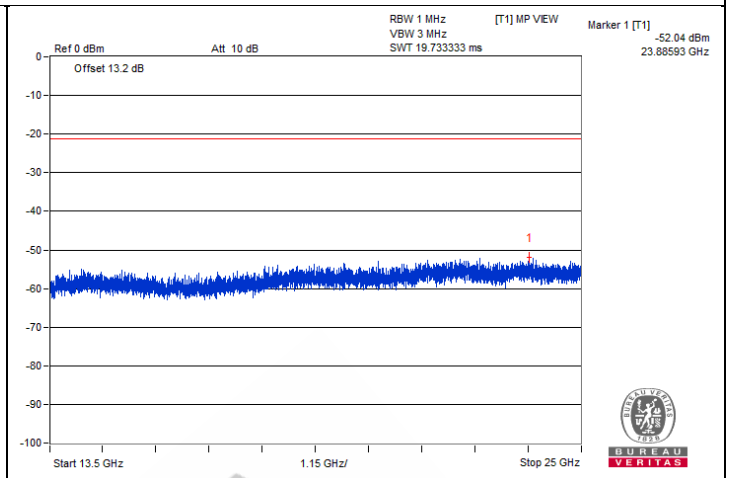

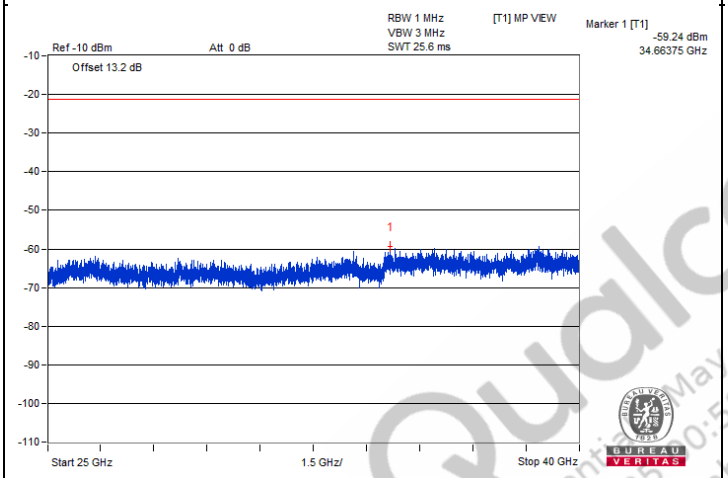

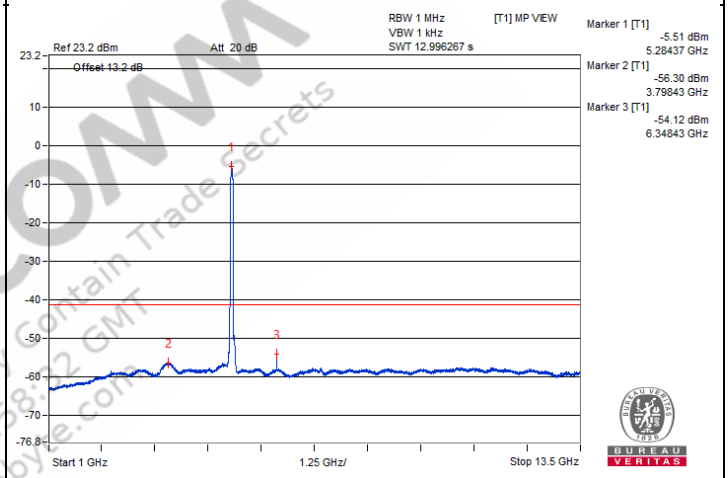


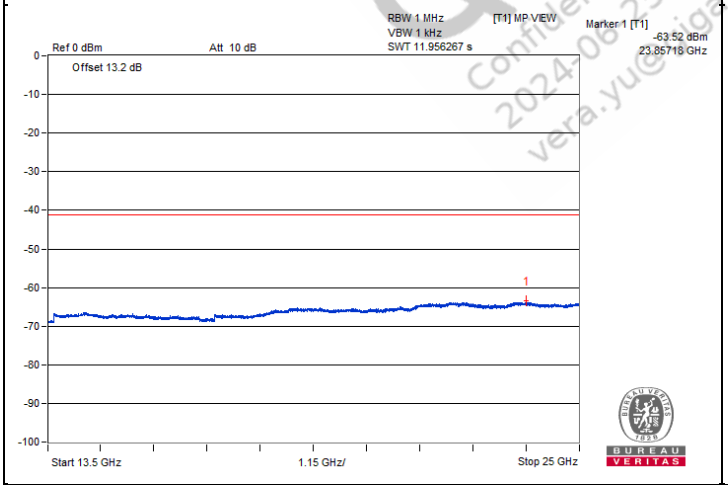


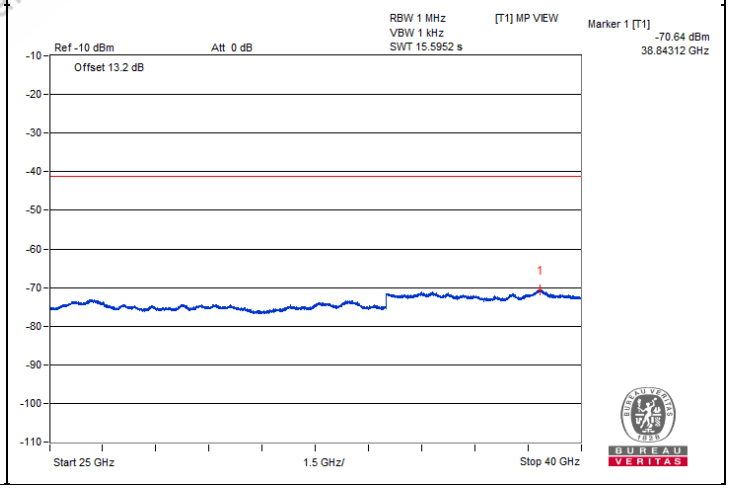



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yu@gigabyte.com


Chain 1

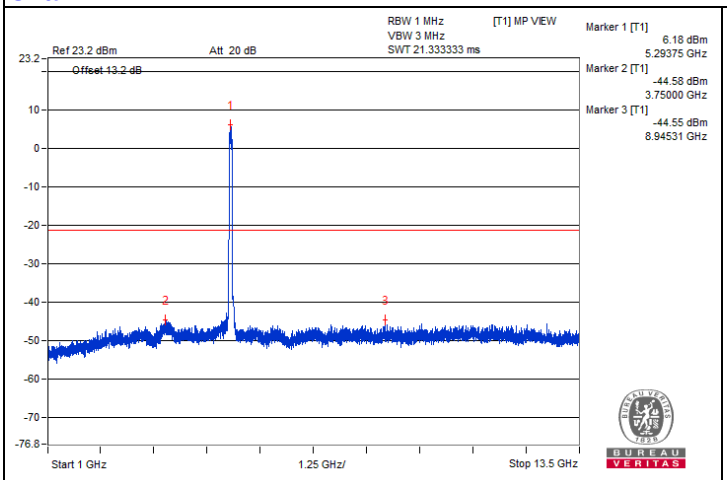


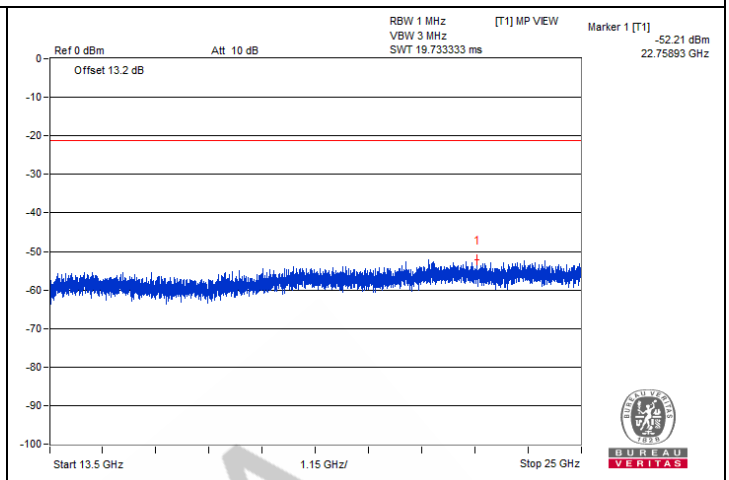

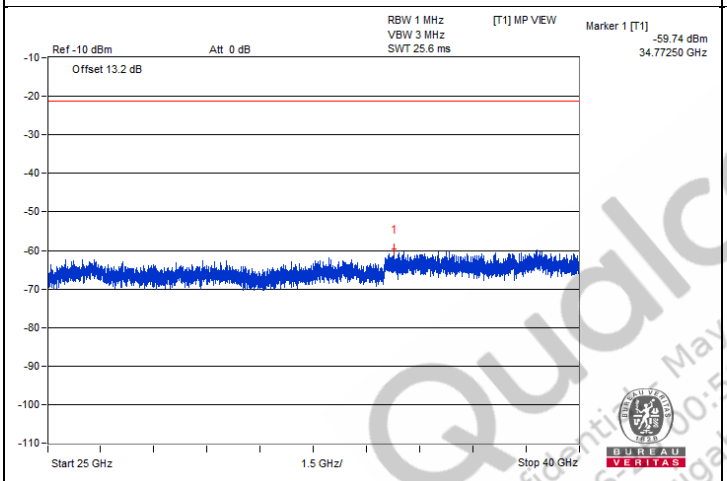

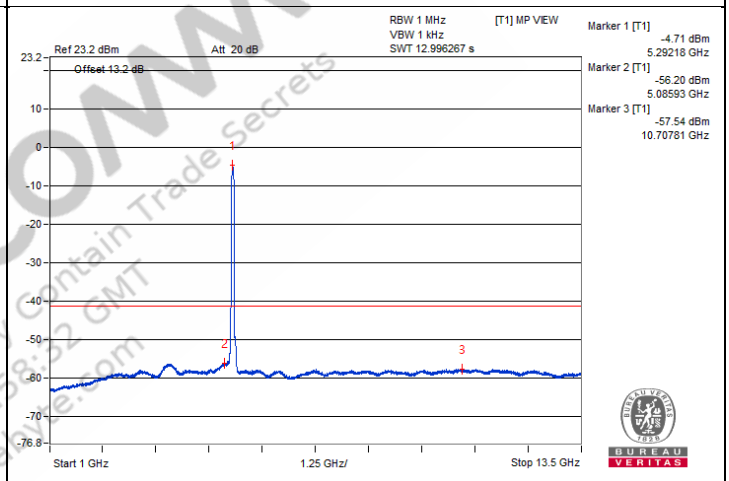

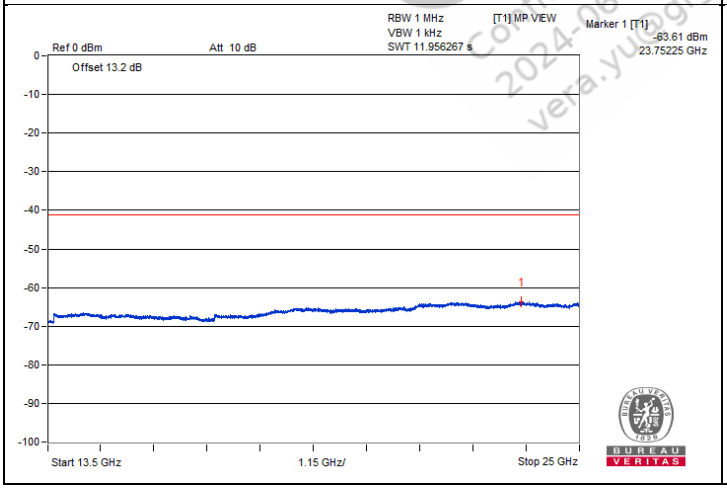

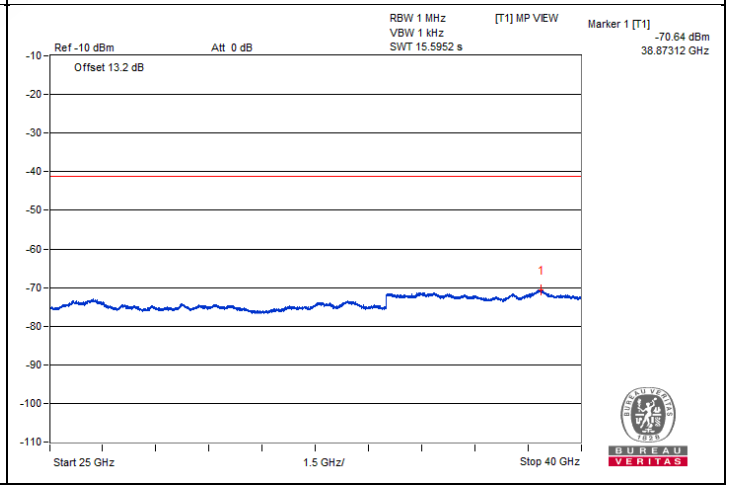

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@bgatvre.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.75	63.91 PK	74	-10.09	-40.37	-41.26	6.43	-31.35
2	5351.97	52.5 AV	54	-1.5	-52.4	-52.01	6.43	-42.76

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

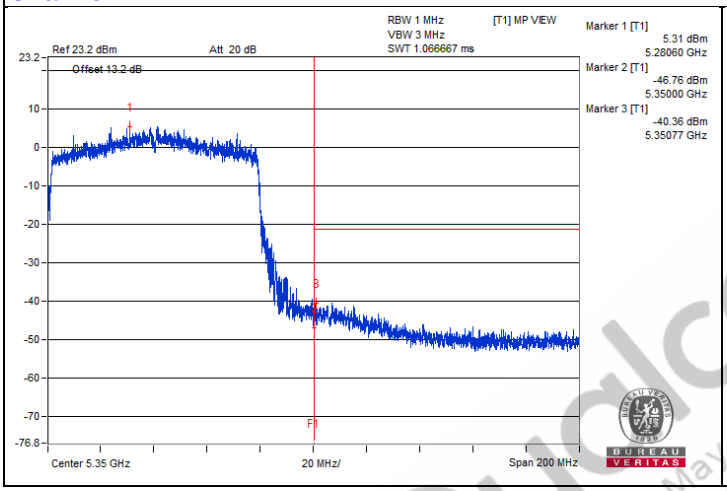

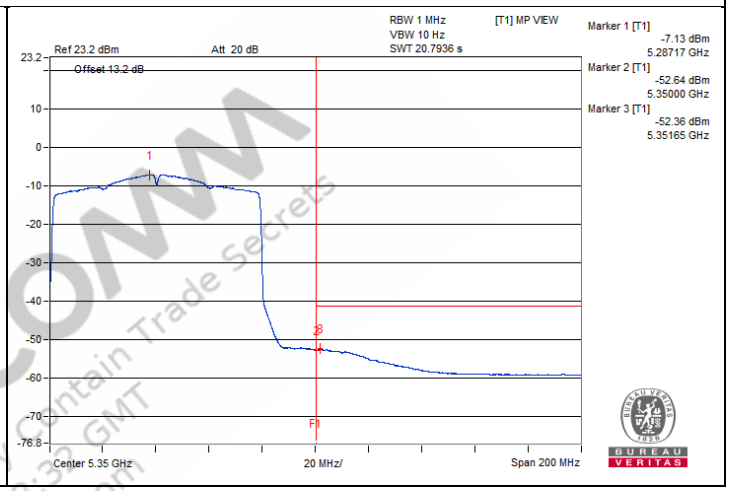

Chain 1

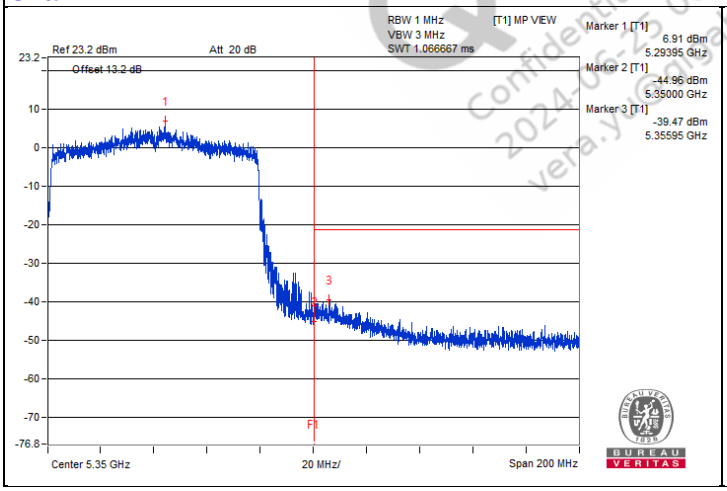

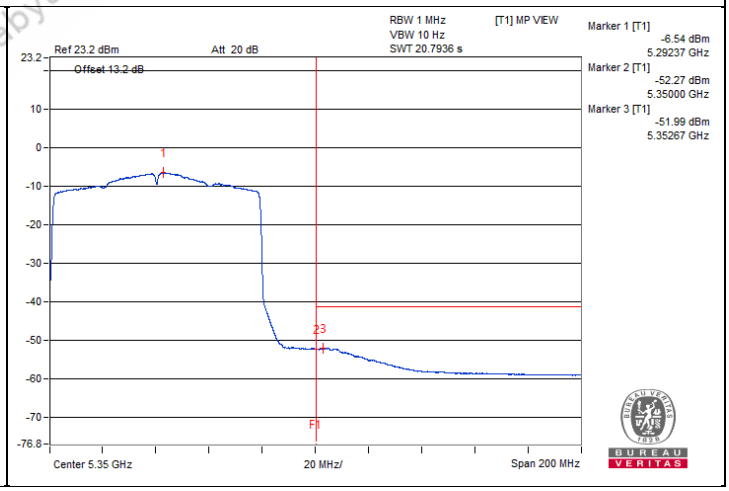

QualcOMM Confidential - May contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yang@byte.com

802.11be (EHT80) - Channel 106

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3682.81	61.06 PK	74	-12.94	-44.31	-46.8	8.17	-34.20
2	3706.25	49.49 AV	54	-4.51	-57	-56.91	8.17	-45.77
3	7362.5	58.88 PK	74	-15.12	-48.38	-46.87	8.17	-36.38
4	7354.68	47.81 AV	54	-6.19	-58.59	-58.67	8.17	-47.45
5	11078.12	59.26 PK	74	-14.74	-47	-47.37	8.17	-36.00
6	11043.75	48.65 AV	54	-5.35	-58.06	-57.53	8.17	-46.61
7	#16587.75	48.34 PK	68.2	-19.86	-58.89	-57.43	8.17	-46.92


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

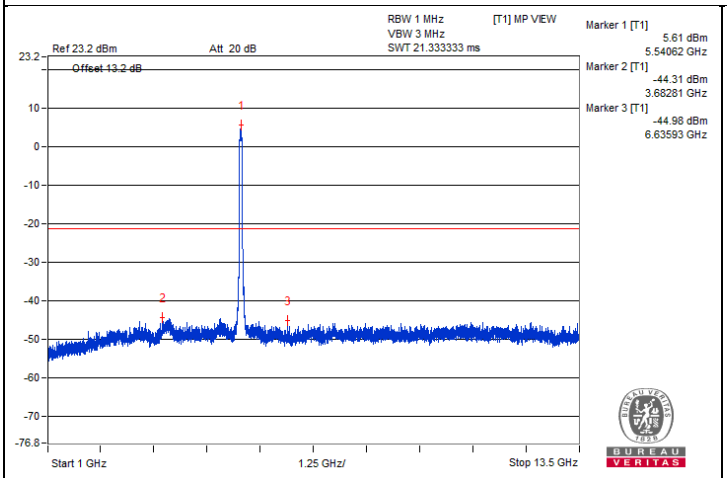


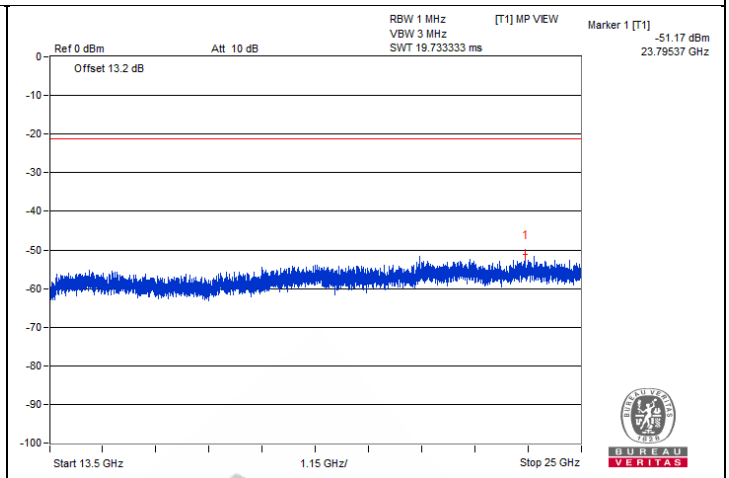

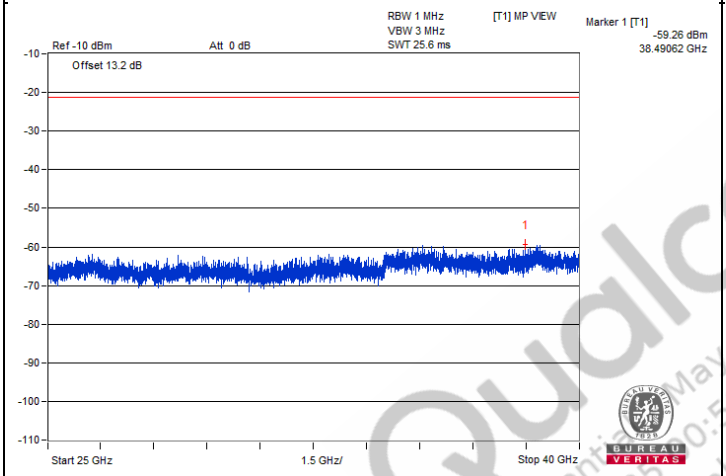

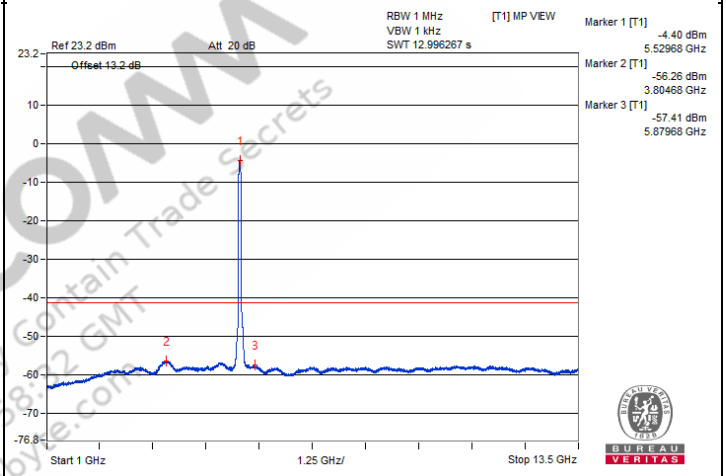


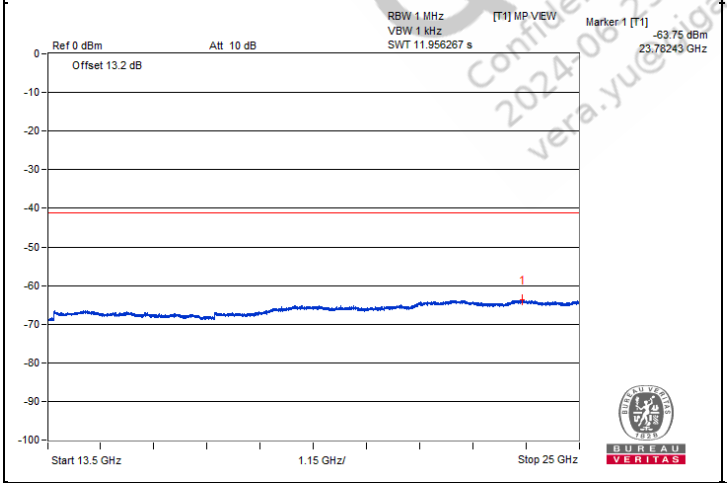


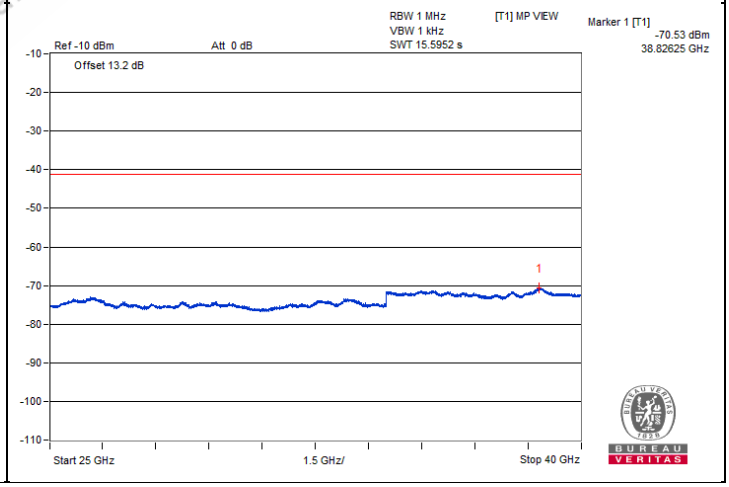



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gabyte.com


Chain 1

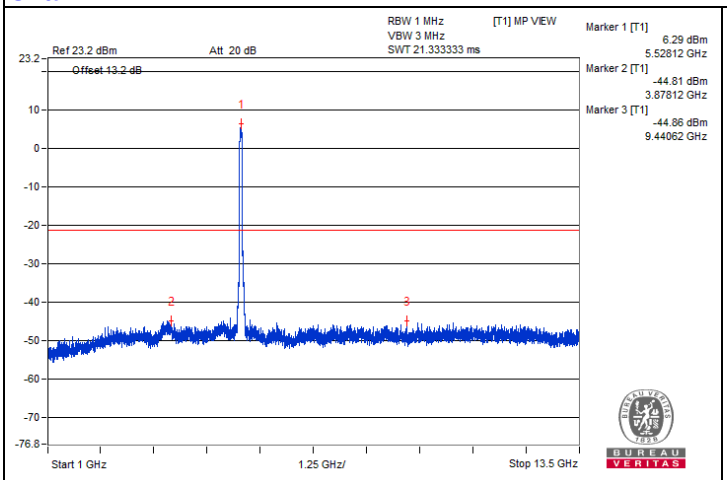


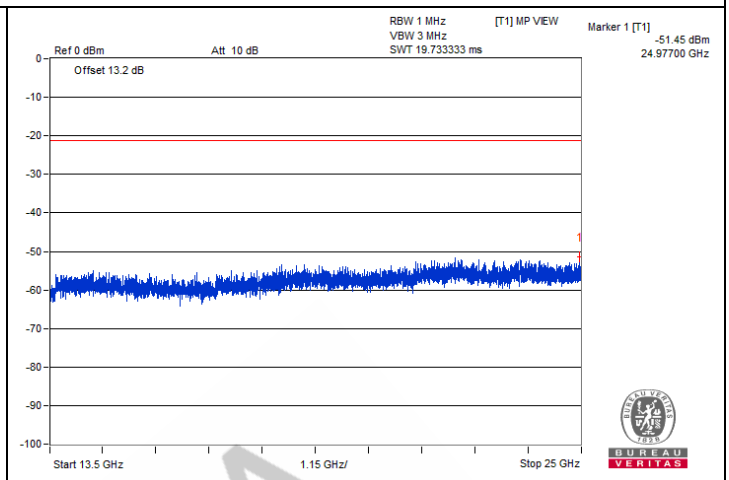

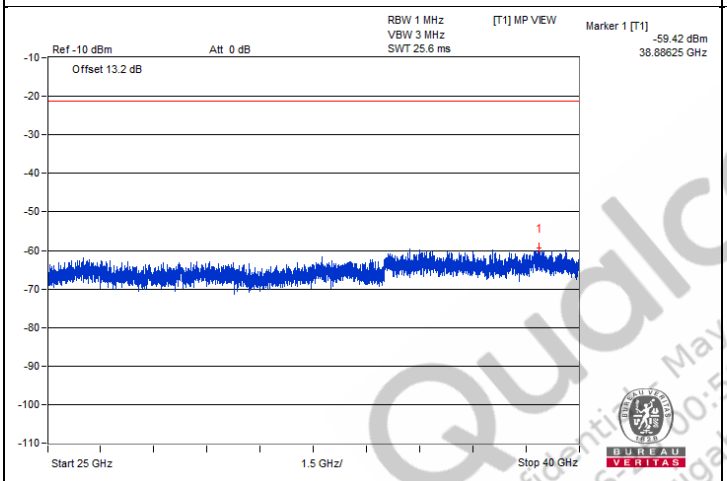

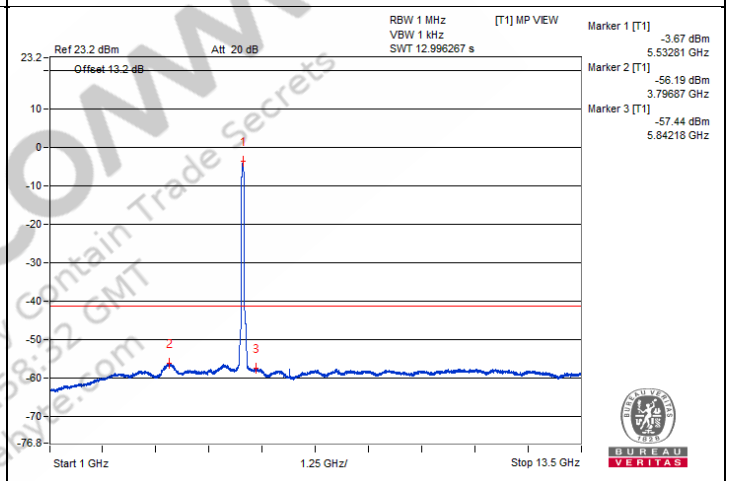

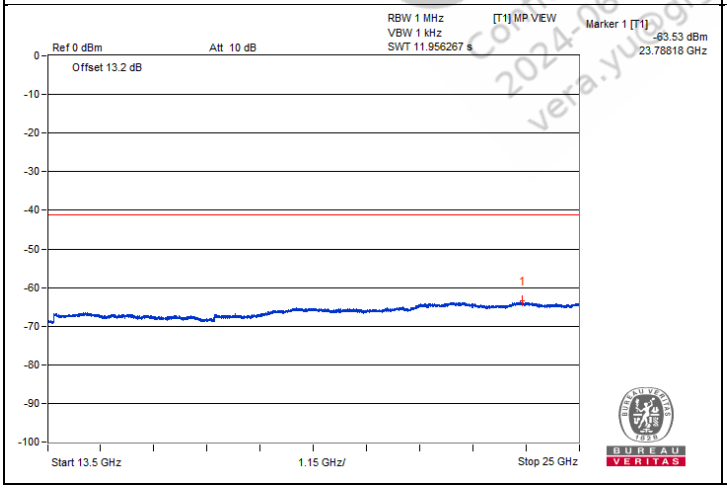

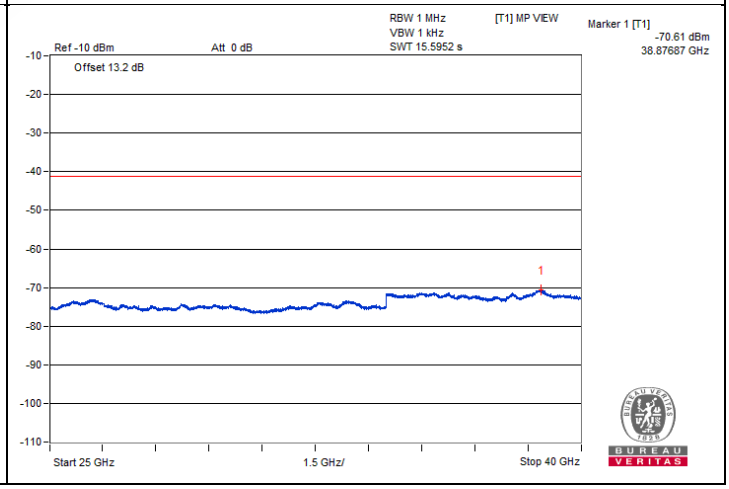

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5458.37	62.54 PK	74	-11.46	-44.96	-42.48	7.82	-32.72
2	5460	51.79 AV	54	-2.21	-53.94	-54.7	7.82	-43.47
3	#5469.12	64.01 PK	68.2	-4.19	-44.03	-40.74	7.82	-31.25


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

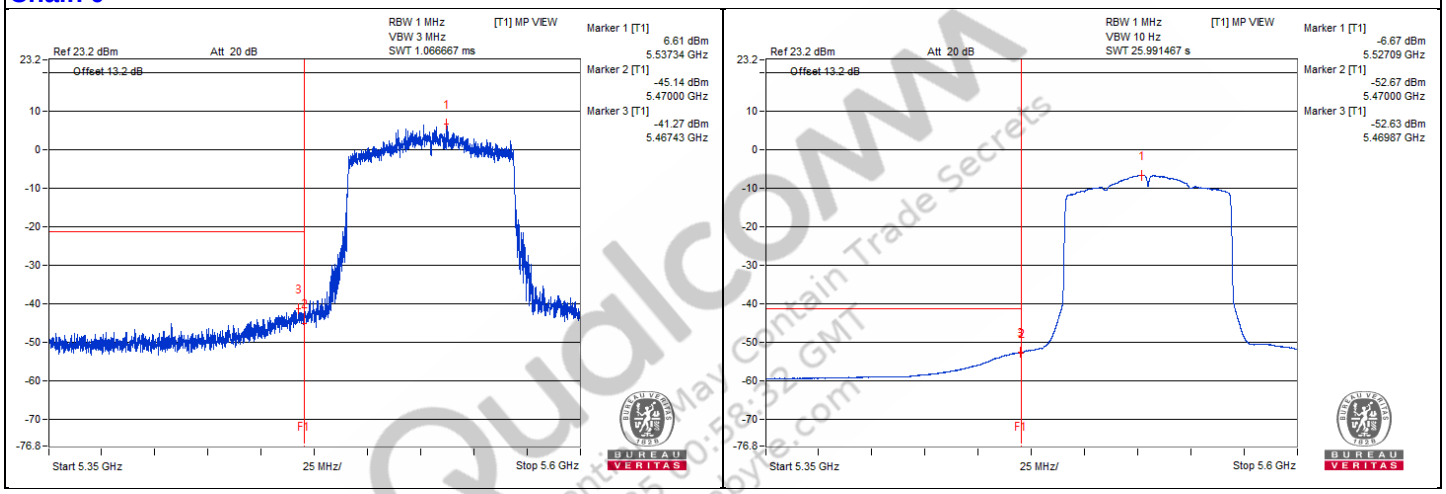

Chain 1

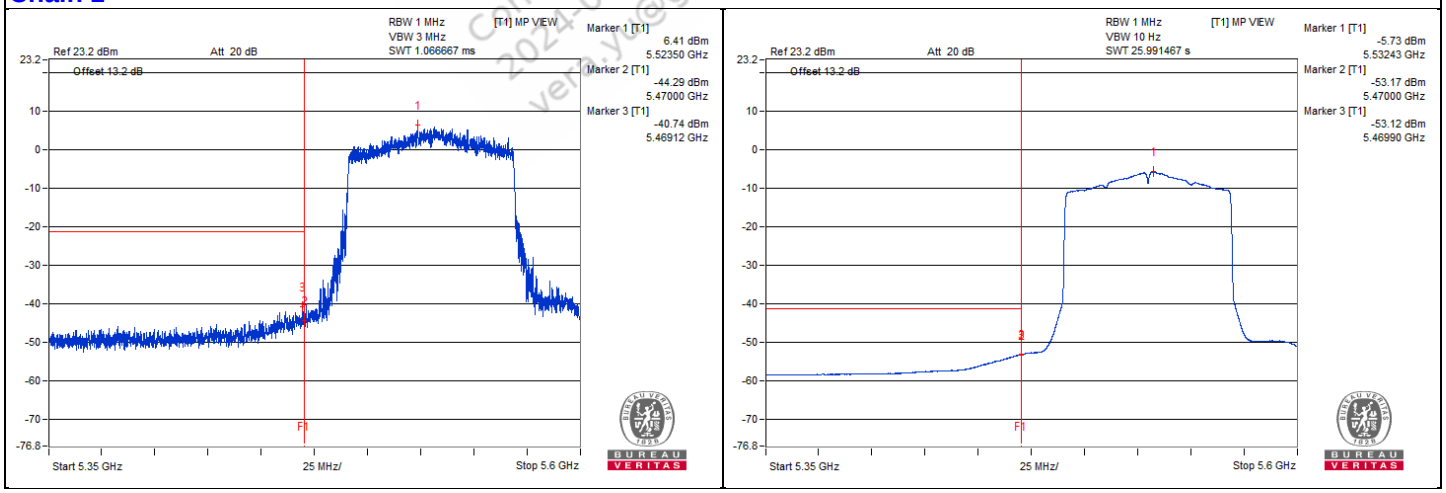

Qualcomm Confidential and Proprietary – May Contain Trade Secrets
2021-06-25 10:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT80) - Channel 122

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3737.5	61.31 PK	74	-12.69	-44.62	-45.7	8.17	-33.95
2	3756.25	50.03 AV	54	-3.97	-56.48	-56.35	8.17	-45.23
3	7481.25	58.43 PK	74	-15.57	-48.14	-47.88	8.17	-36.83
4	7496.87	47.38 AV	54	-6.62	-59.31	-58.82	8.17	-47.88
5	11203.12	60.07 PK	74	-13.93	-47.05	-45.78	8.17	-35.19
6	11210.93	48.15 AV	54	-5.85	-58.25	-58.33	8.17	-47.11
7	#16836.43	47.51 PK	68.2	-20.69	-59.3	-58.59	8.17	-47.75


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

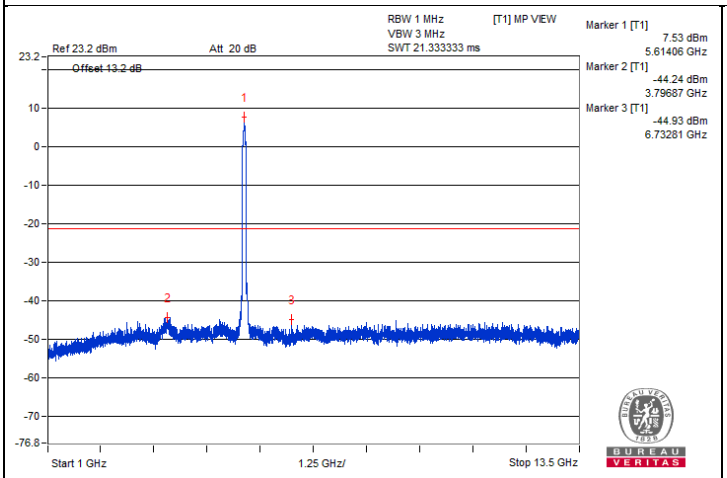


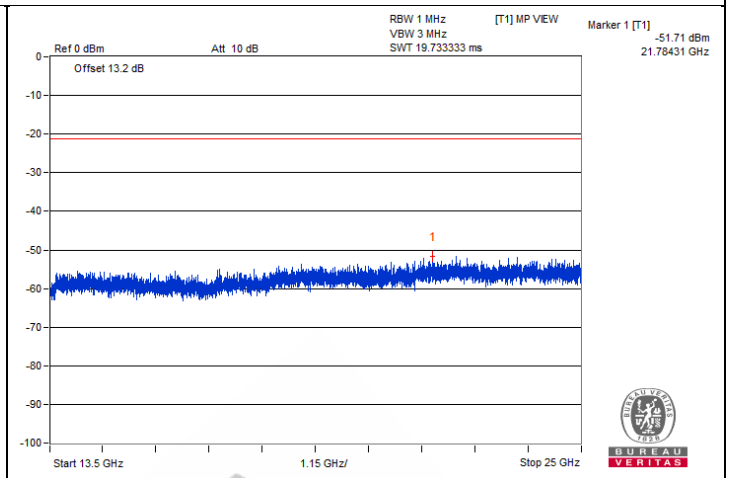

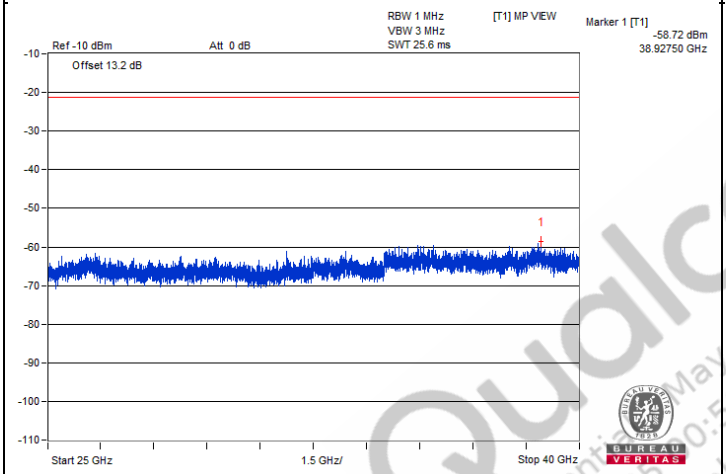

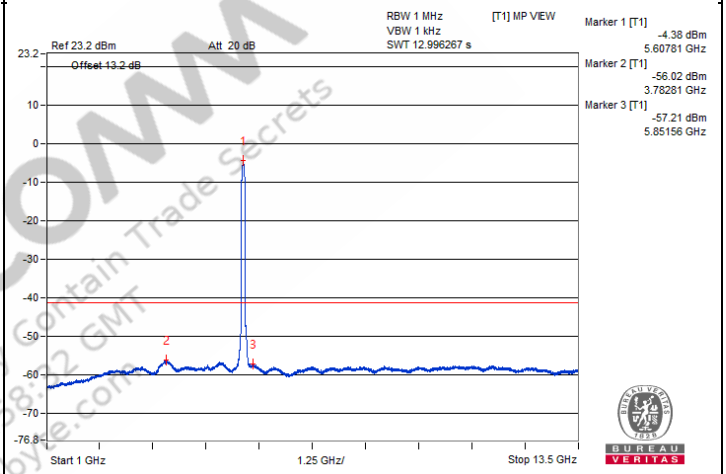


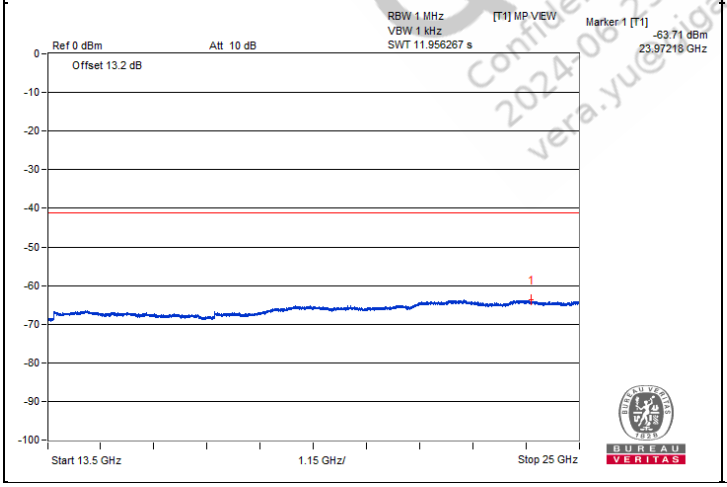


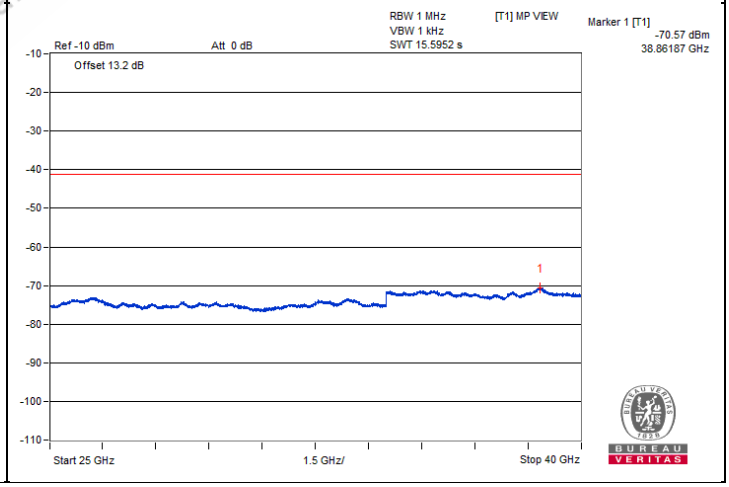



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

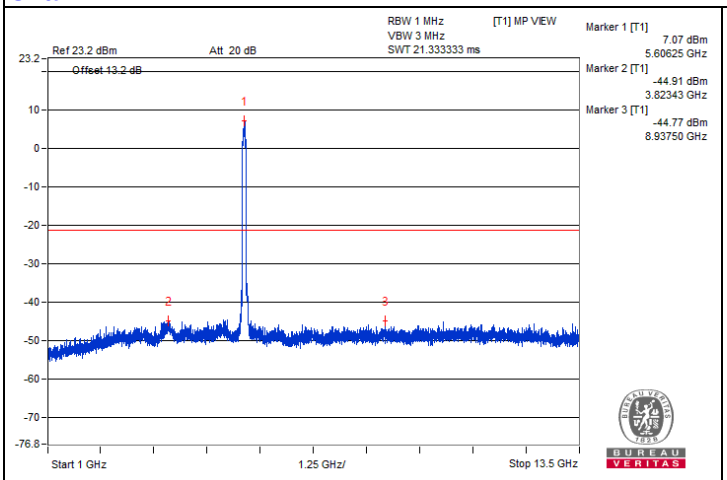


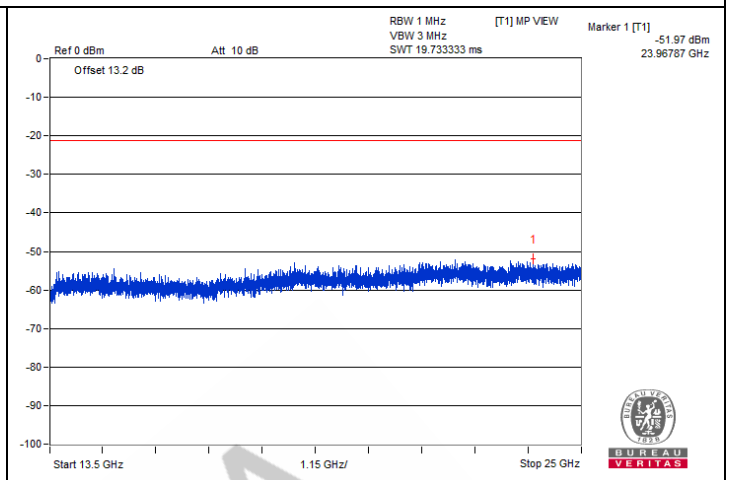

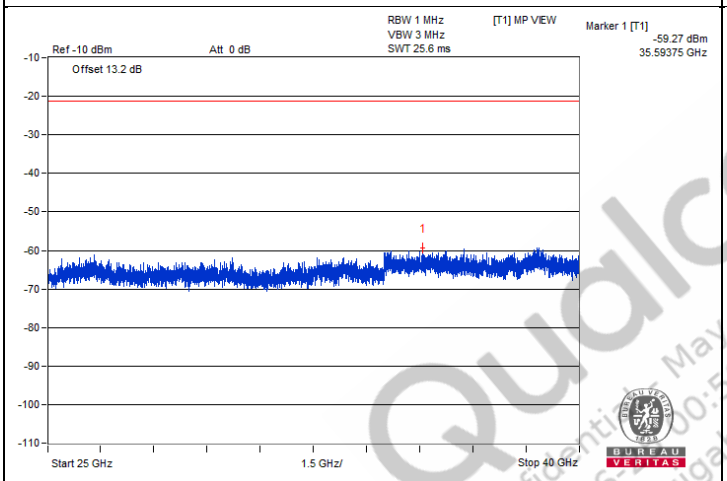

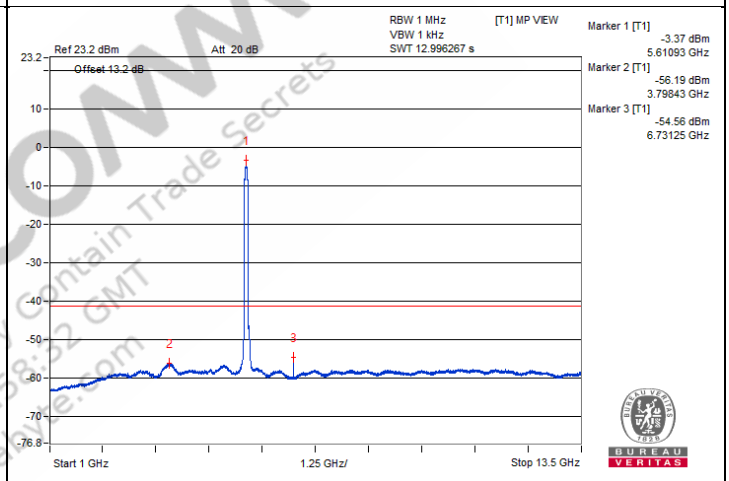

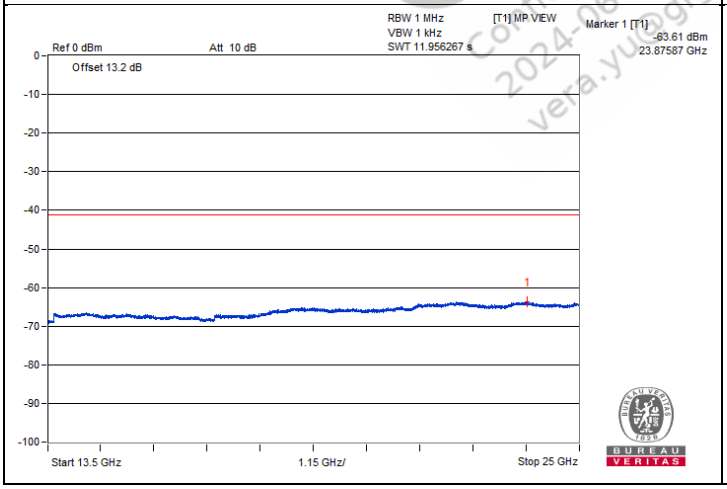

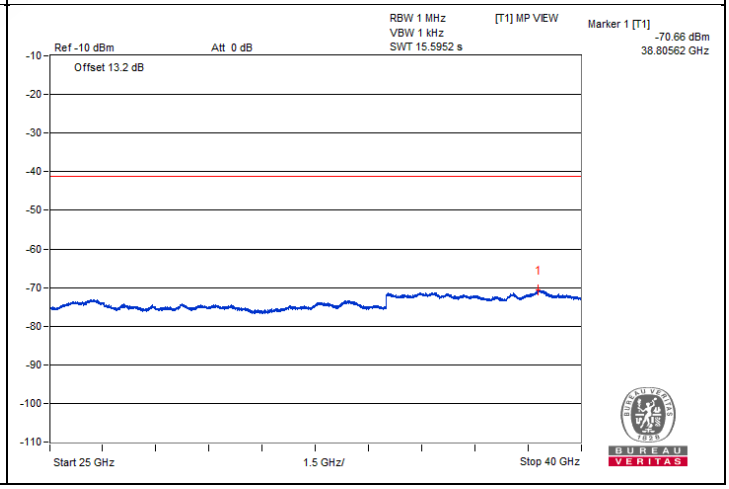

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5730.12	59.52 PK	68.2	-8.68	-47.05	-46.13	7.82	-35.74


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

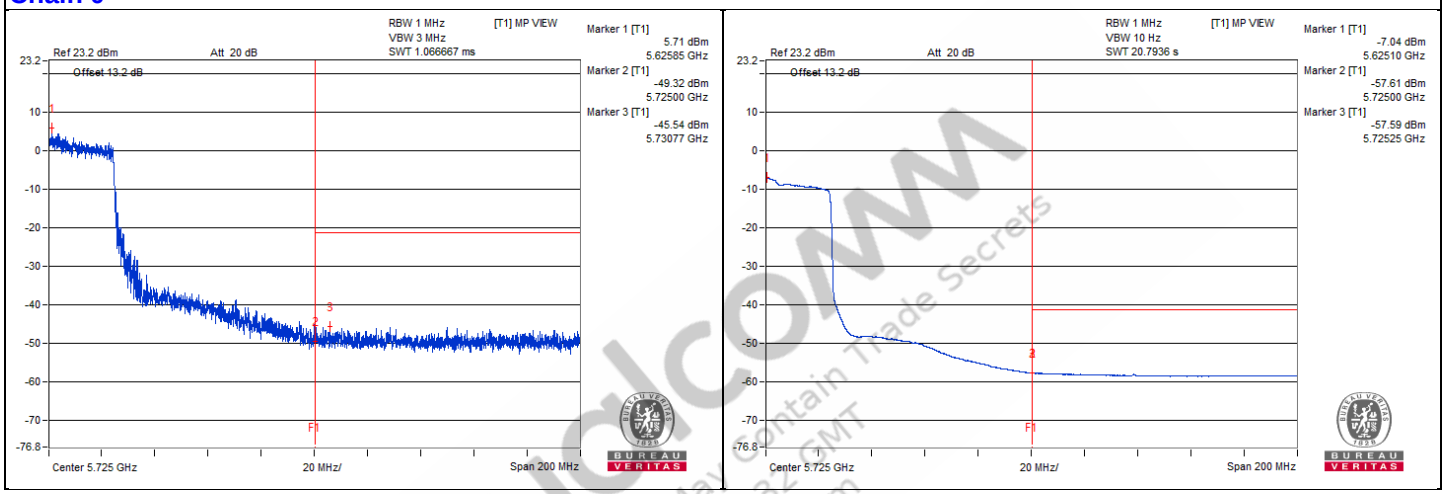

Chain 1

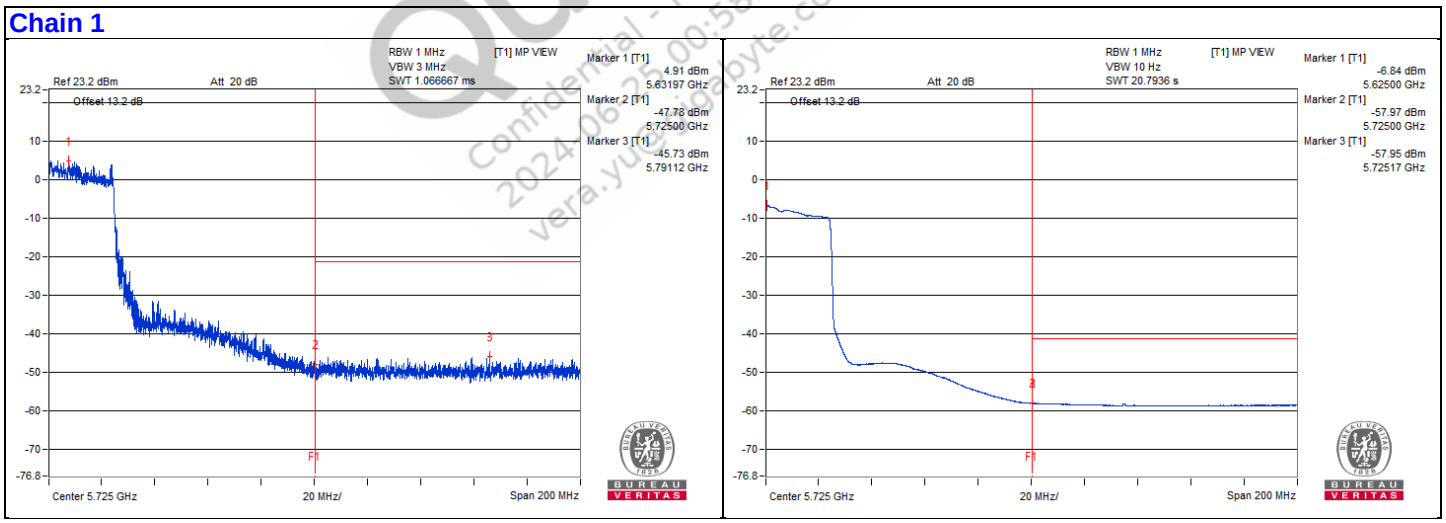

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

802.11be (EHT80) - Channel 138

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3726.56	61.45 PK	74	-12.55	-44.3	-45.81	8.17	-33.81
2	3732.81	49.97 AV	54	-4.03	-56.48	-56.47	8.17	-45.29
3	7482.81	58.08 PK	74	-15.92	-50.15	-47.09	8.17	-37.18
4	7471.87	47.52 AV	54	-6.48	-59.1	-58.75	8.17	-47.74
5	11220.31	59.19 PK	74	-14.81	-47.6	-46.92	8.17	-36.07
6	11221.87	48.13 AV	54	-5.87	-58.4	-58.22	8.17	-47.13
7	#16835	47.97 PK	68.2	-20.23	-59.21	-57.83	8.17	-47.29


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

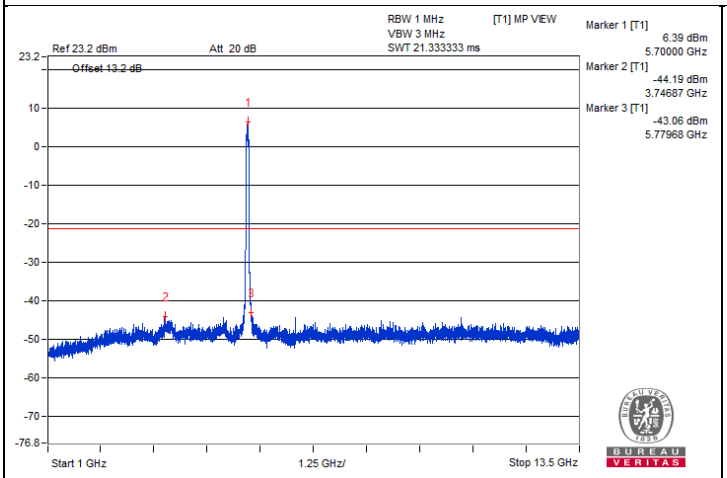


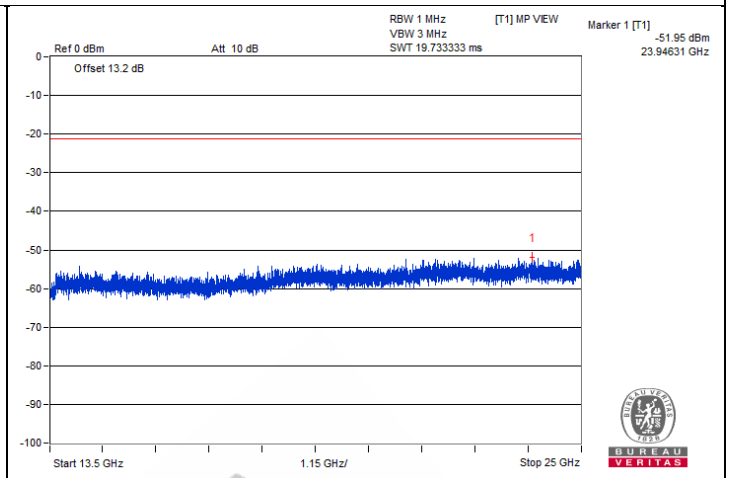

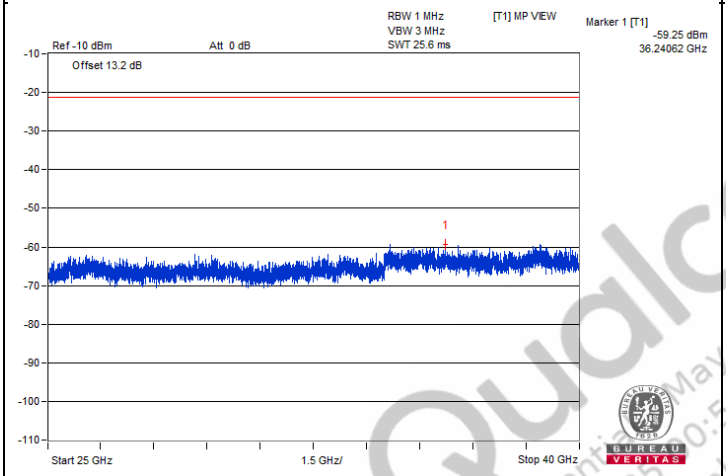

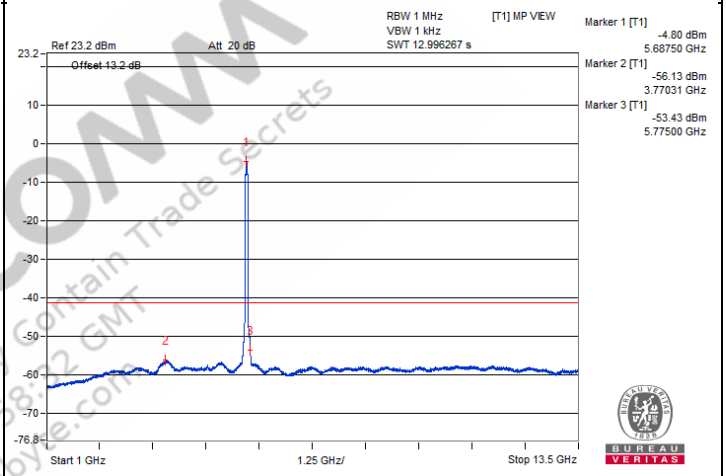


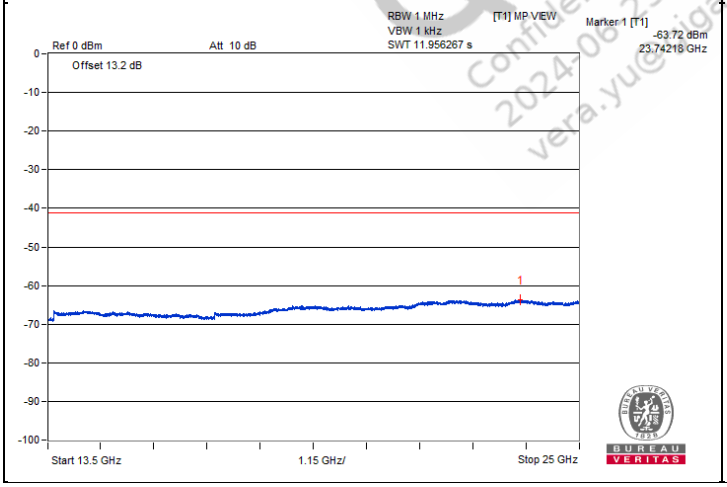


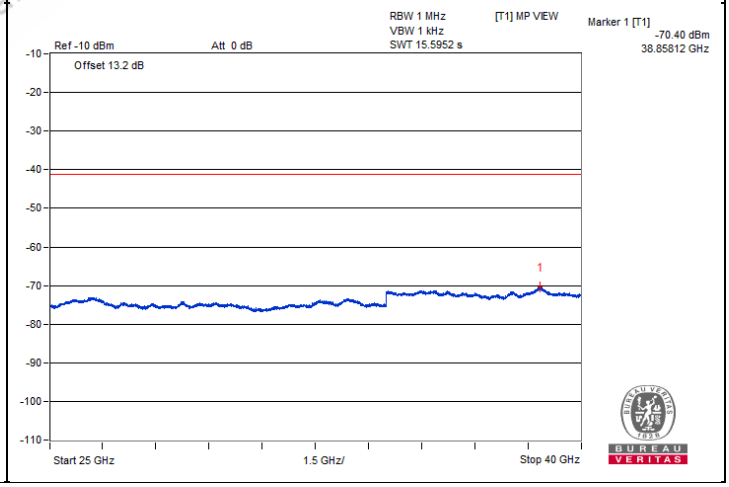



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

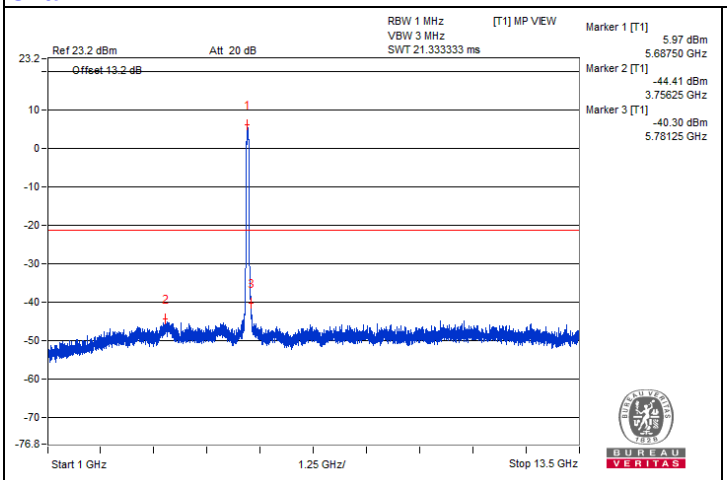


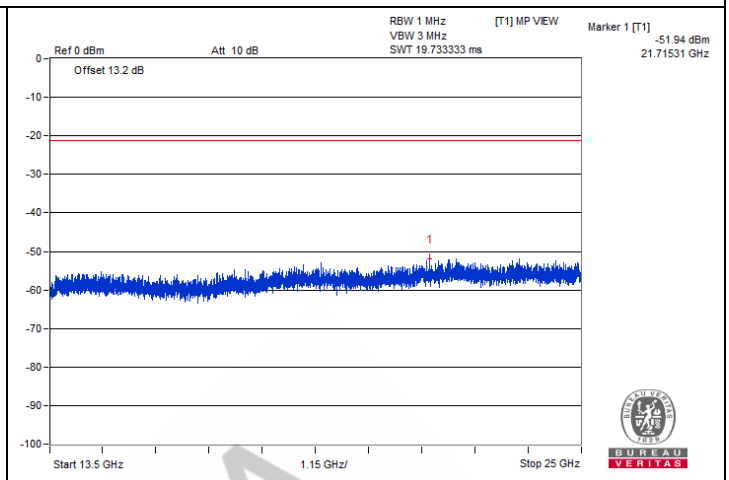

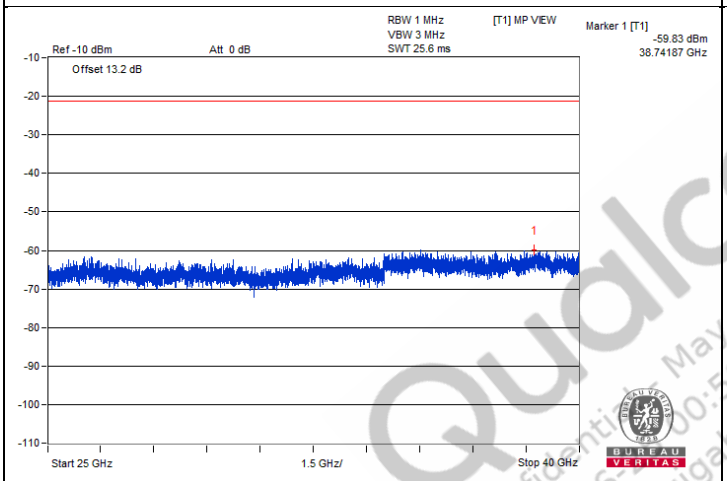

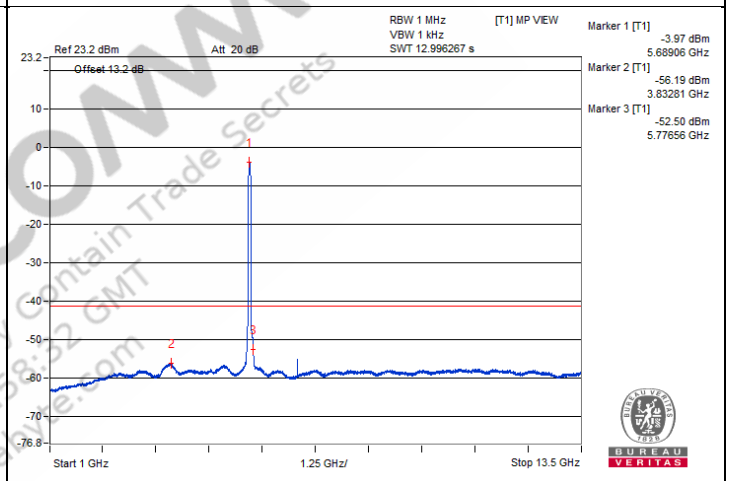

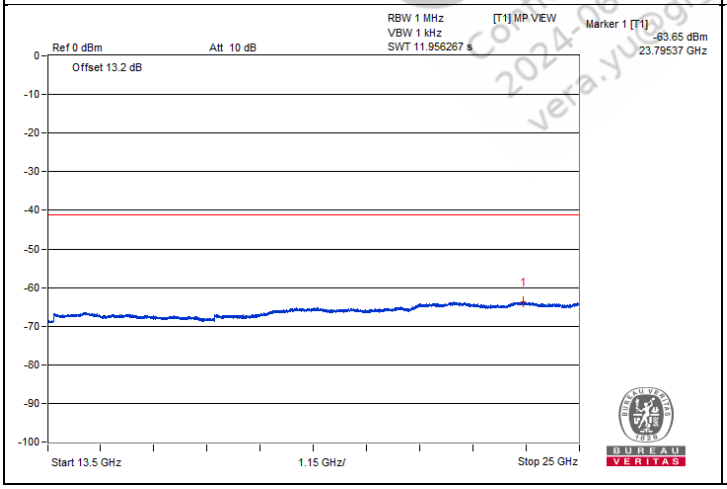

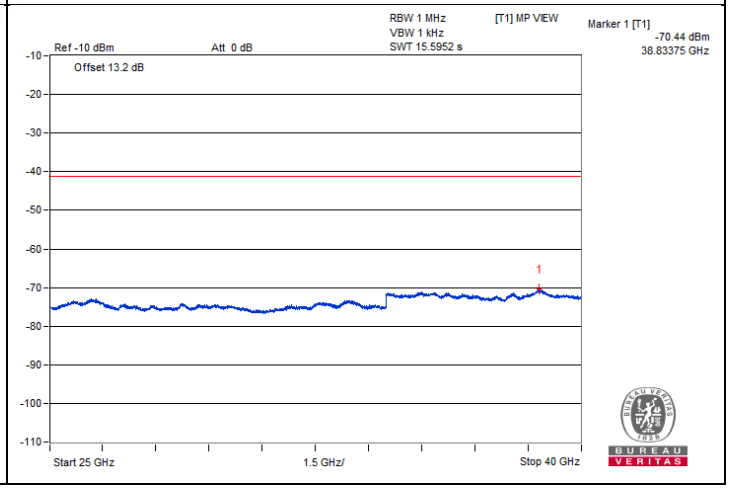

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5860.67	59.54 PK	68.2	-8.66	-45.63	-47.73	7.82	-35.72

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

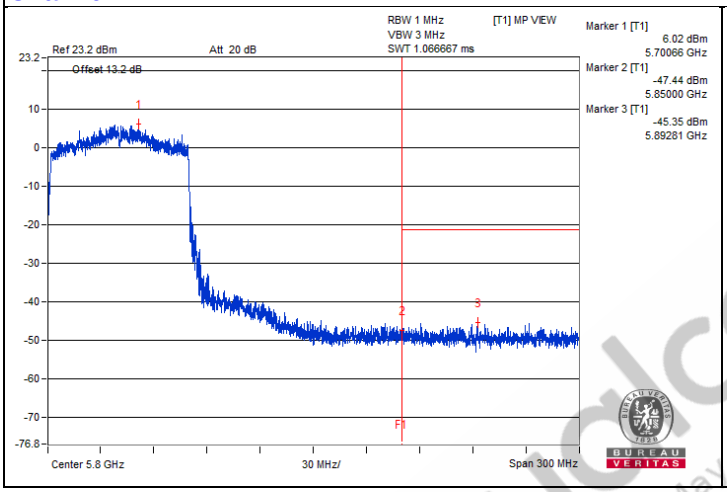

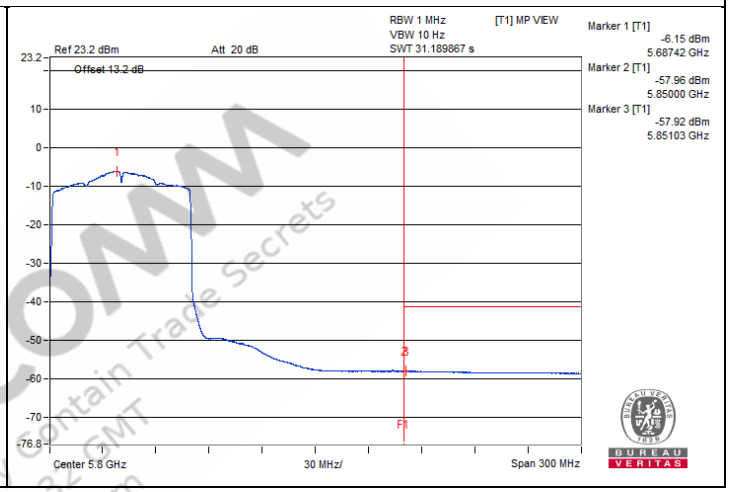

Chain 1

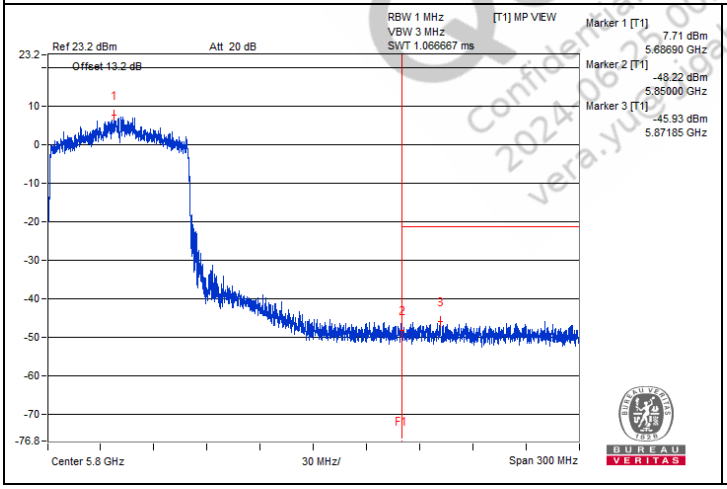

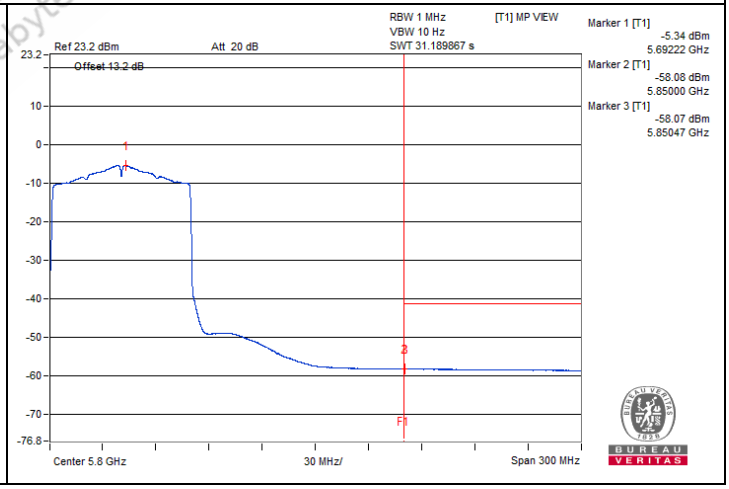

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

802.11be (EHT80) – Channel 155

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3868.75	60.8 PK	74	-13.2	-47.02	-44.59	8.17	-34.46
2	3859.37	49.99 AV	54	-4.01	-56.49	-56.41	8.17	-45.27
3	7709.37	58.66 PK	74	-15.34	-48.46	-47.2	8.17	-36.60
4	7700	48.28 AV	54	-5.72	-58.22	-58.11	8.17	-46.98
5	11562.5	59.43 PK	74	-14.57	-45.84	-48.62	8.17	-35.83
6	11550	48.48 AV	54	-5.52	-57.99	-57.94	8.17	-46.78
7	#17310.81	49.4 PK	68.2	-18.8	-57.41	-56.7	8.17	-45.86


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

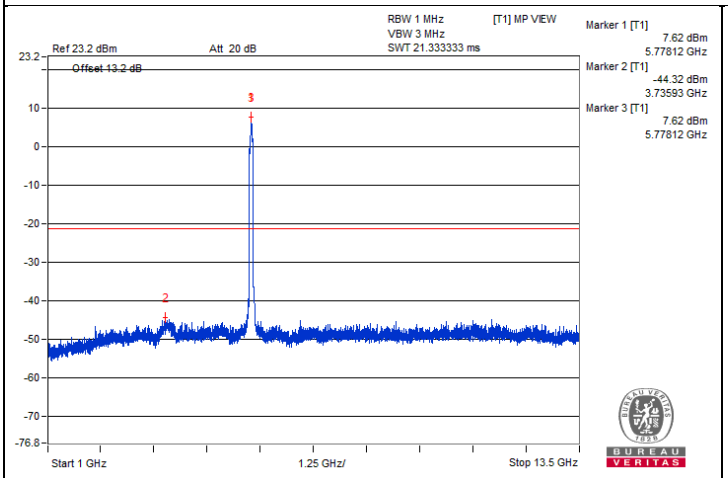


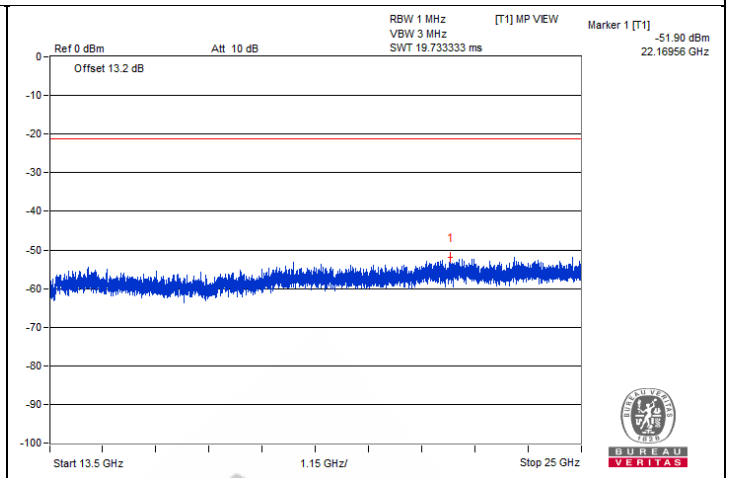

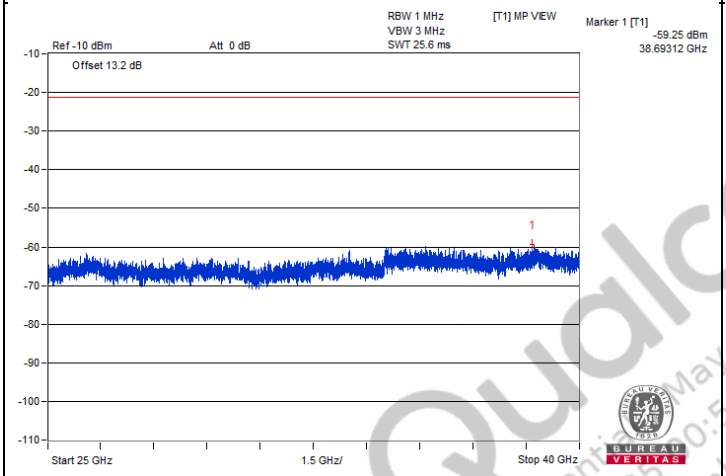

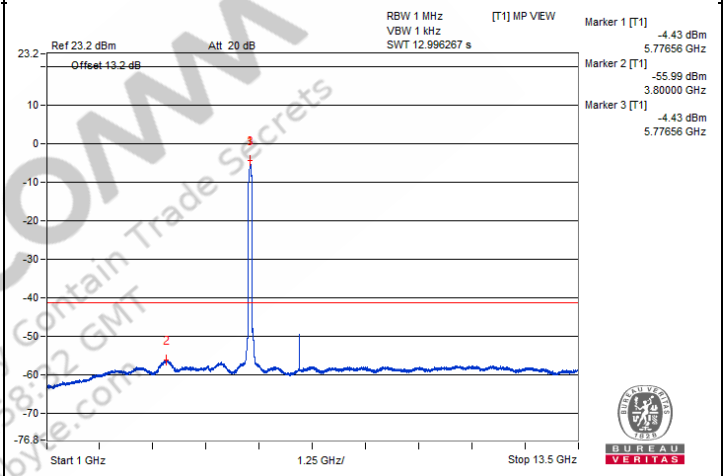


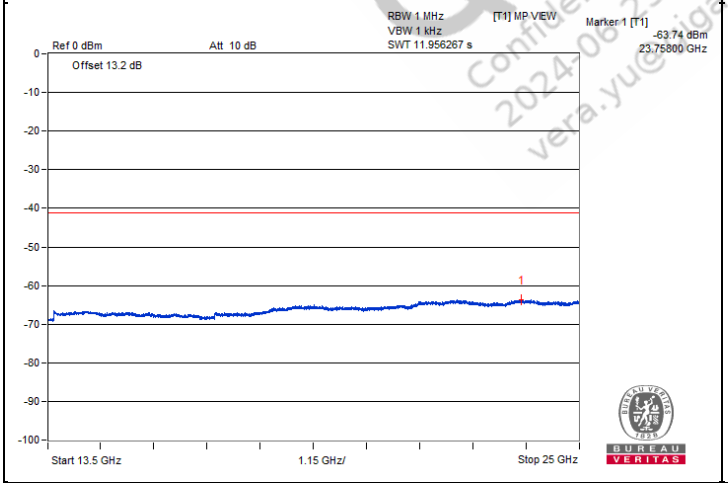


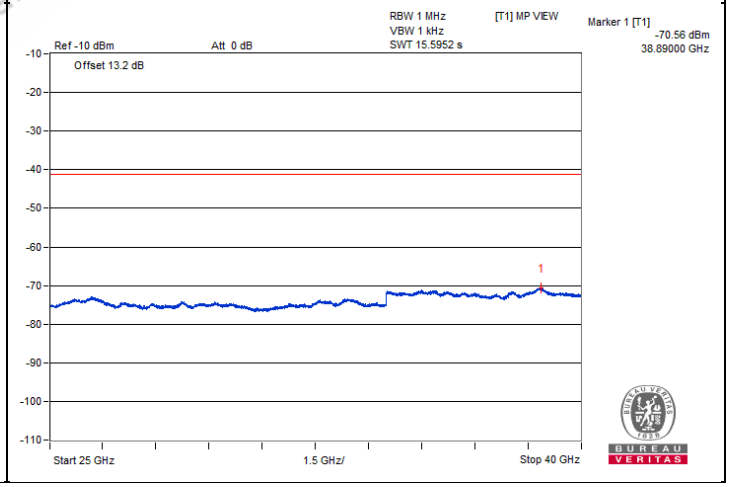



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@qualcomm.com


Chain 1

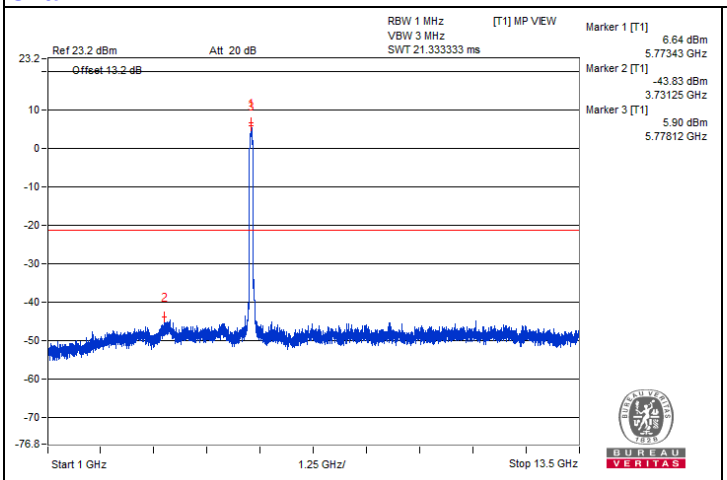


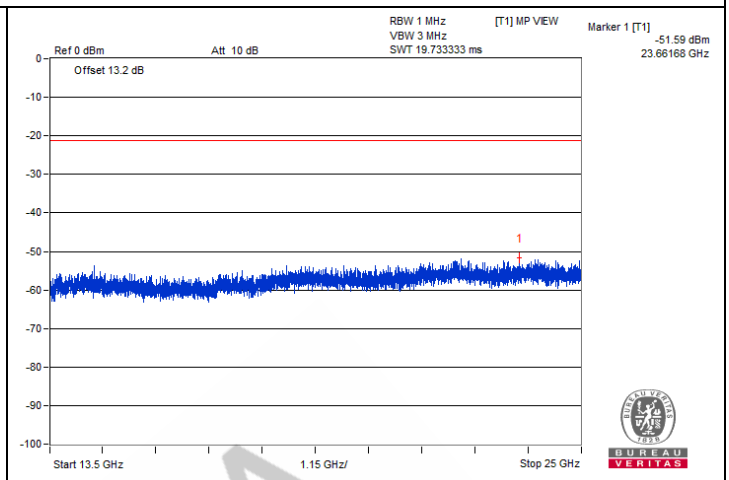

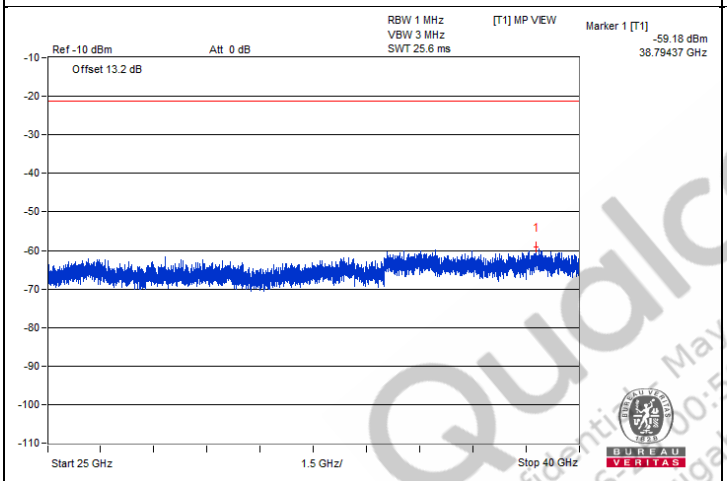

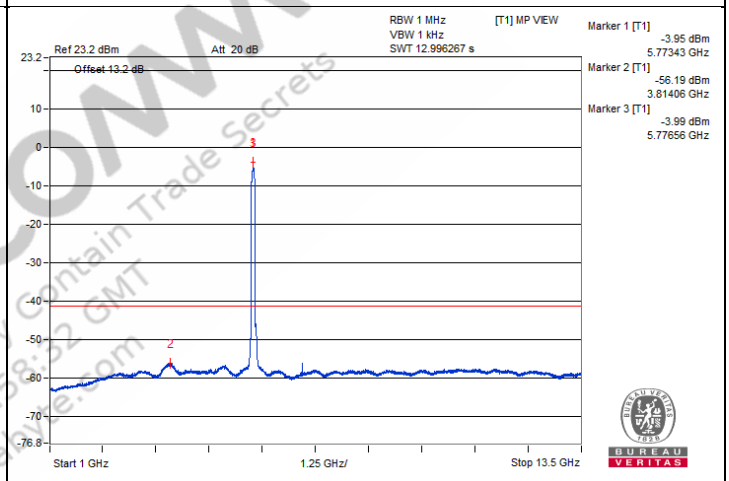

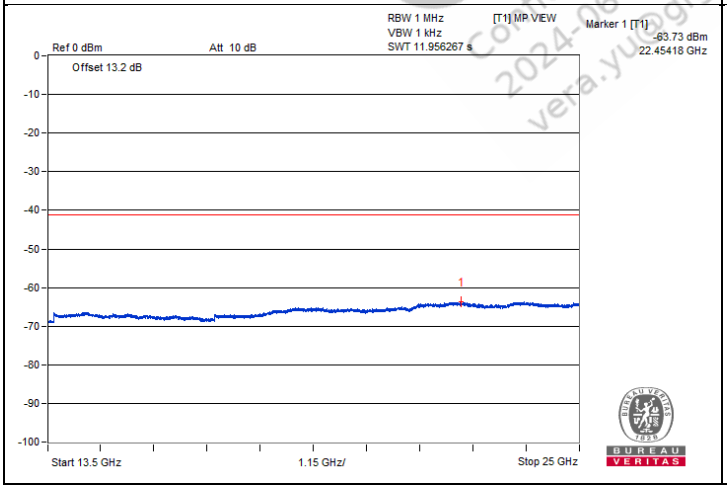


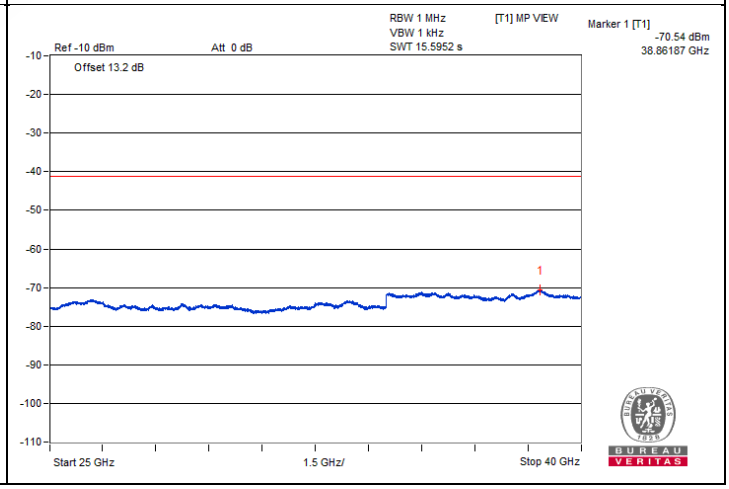

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

Chain 0

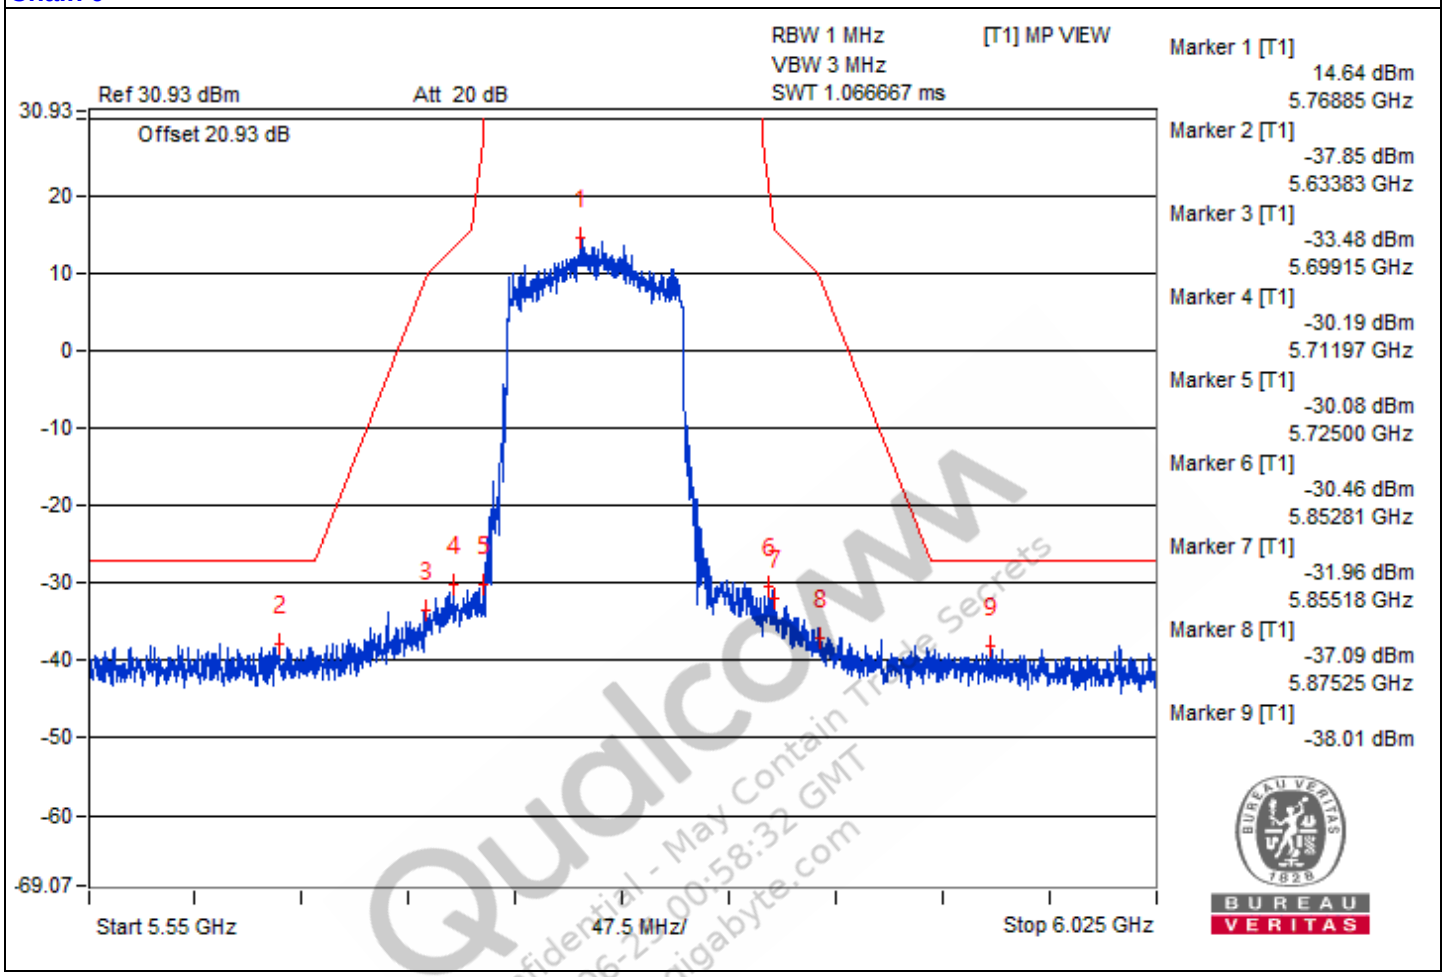

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

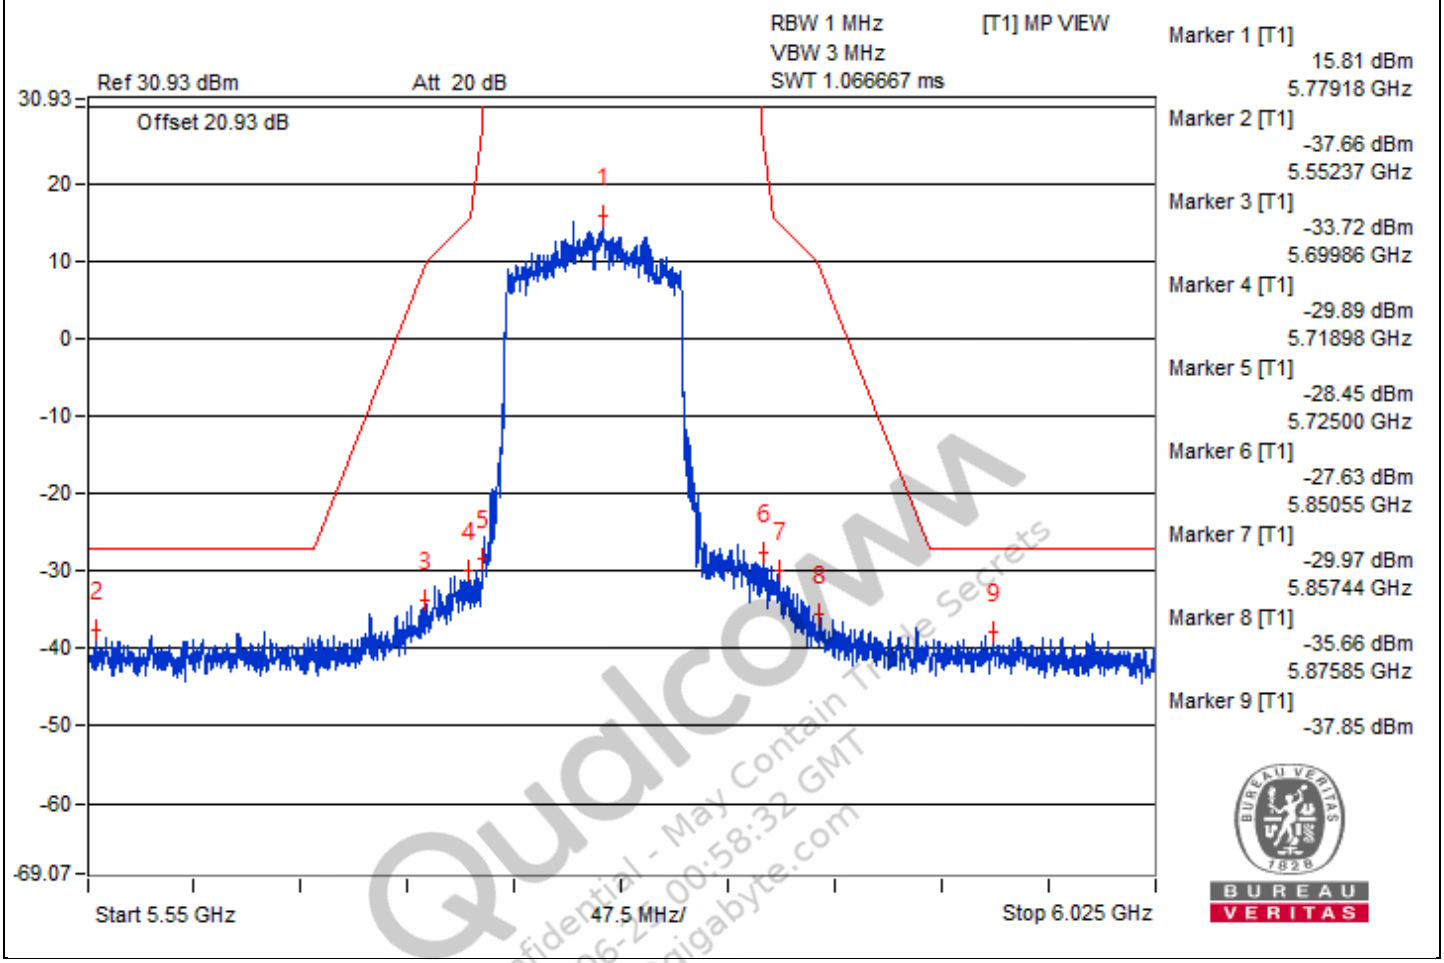

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT160) - Channel 50

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3509.37	58.15 PK	74	-15.85	-47.26	-49.64	8.17	-37.11
2	3512.5	47.08 AV	54	-6.92	-59.38	-59.34	8.17	-48.18
3	#7009.37	57.99 PK	68.2	-10.21	-48.02	-48.93	8.17	-37.27
4	#10510.93	59.3 PK	68.2	-8.9	-47.66	-46.68	8.17	-35.96
5	15754	47.91 PK	74	-26.09	-57.97	-59.17	8.17	-47.35
6	15765.5	38.86 AV	54	-15.14	-67.46	-67.71	8.17	-56.40


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

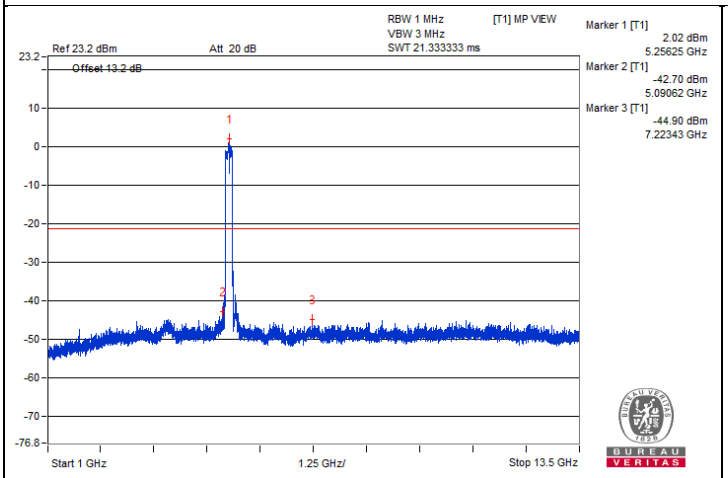


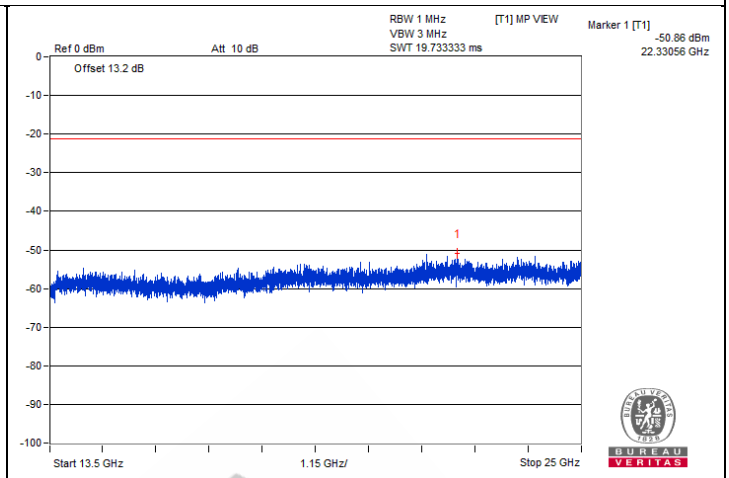

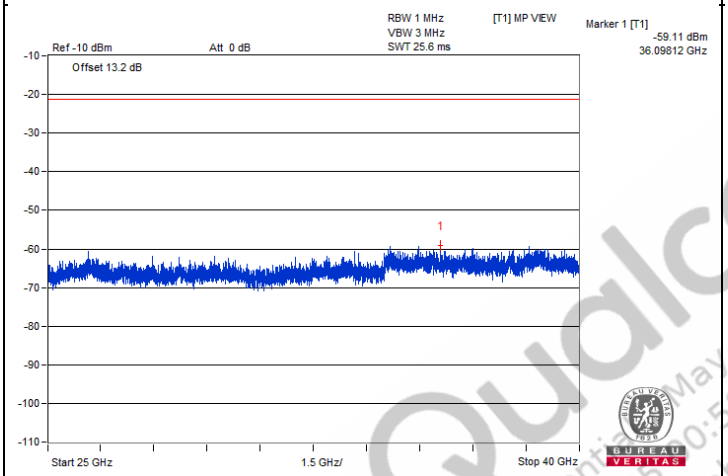

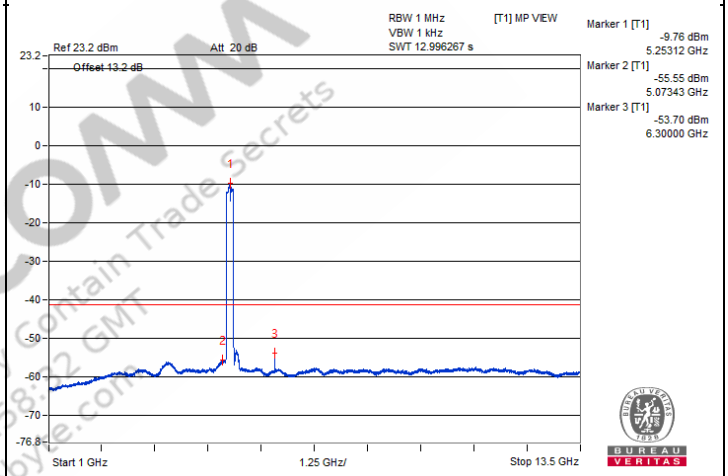


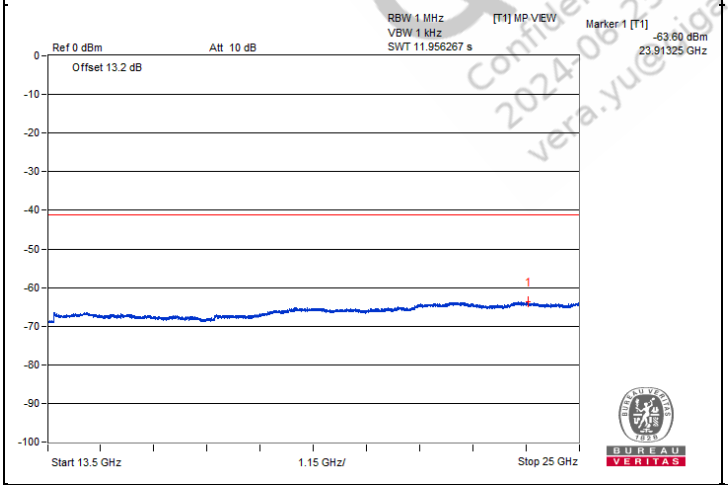


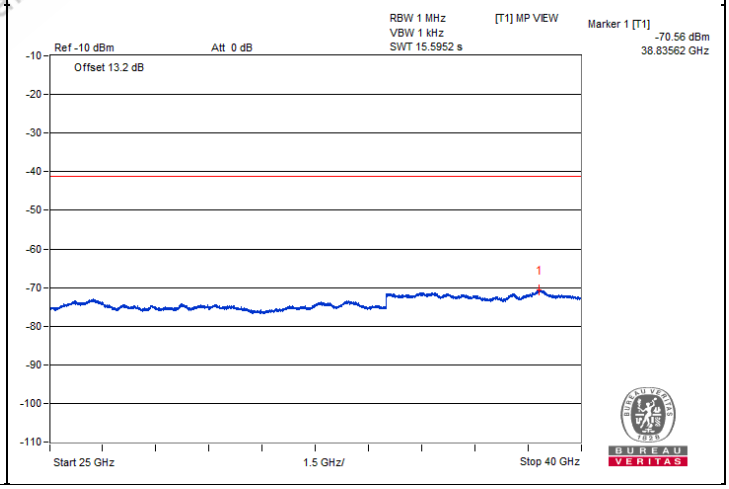



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yu@gigabyte.com


Chain 1

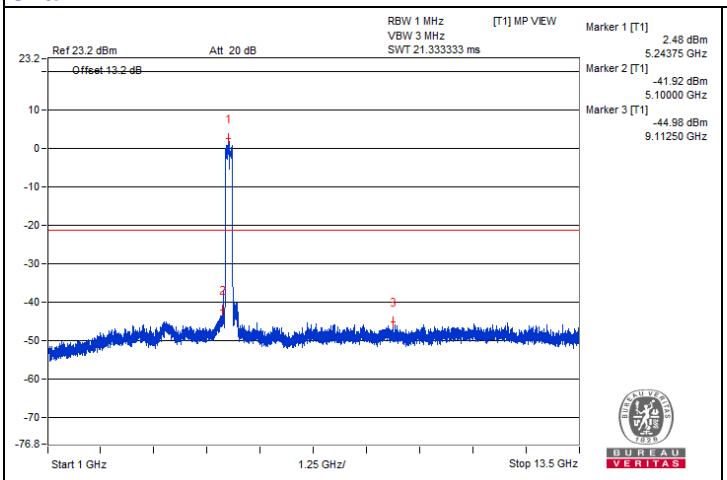


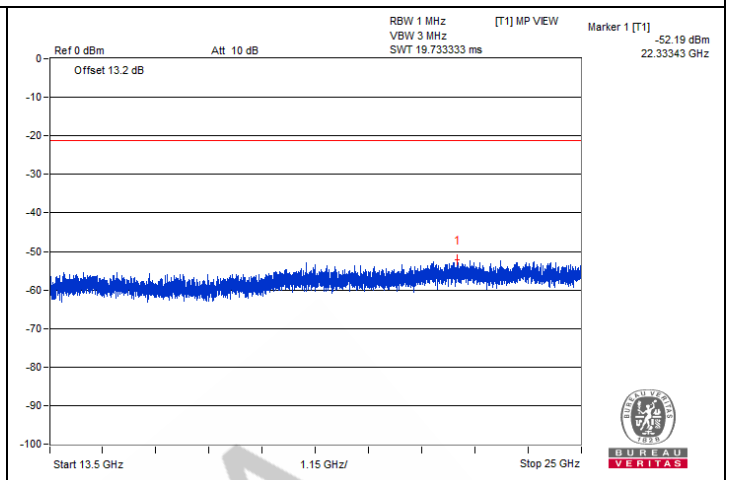

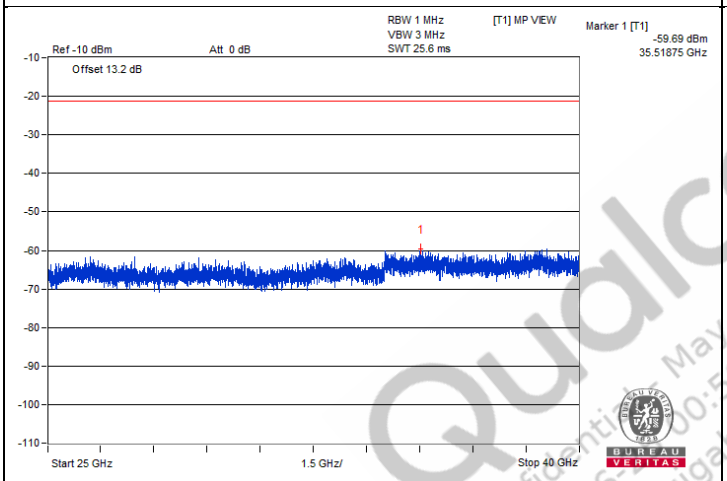

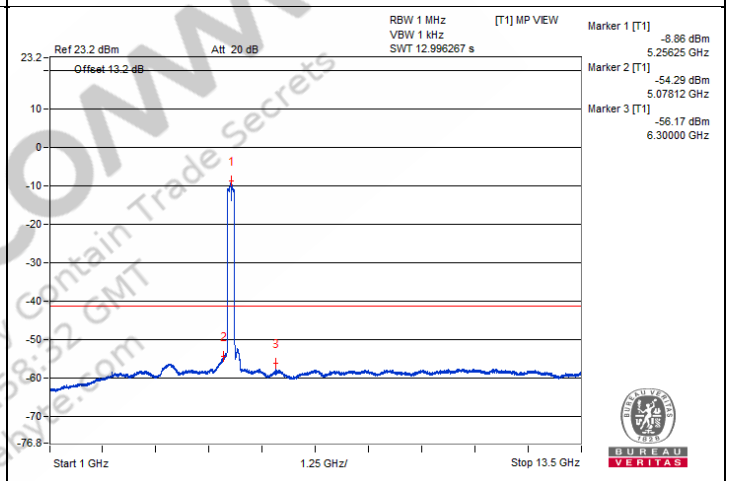

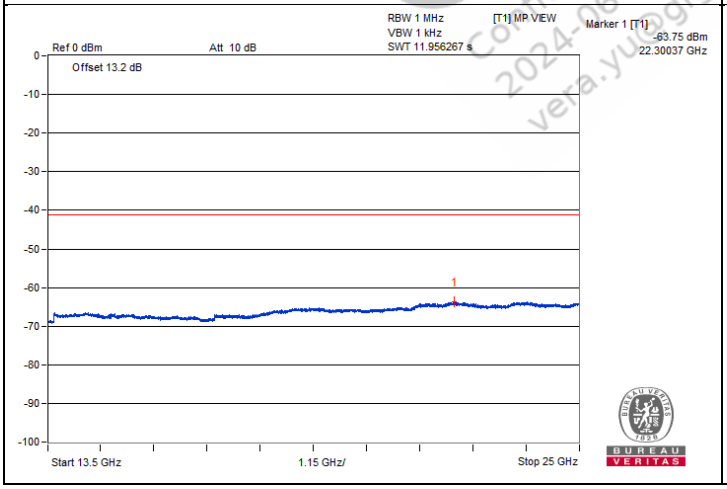

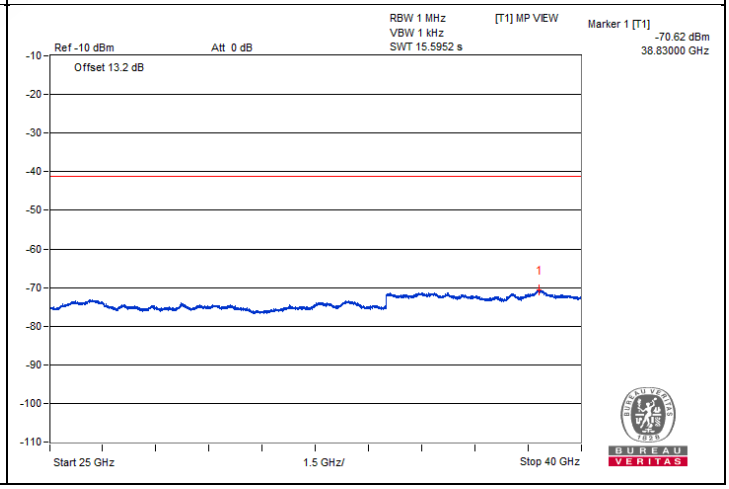

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5133.4	66.01 PK	74	-7.99	-47.51	-35.97	6.43	-29.25
2	5147.97	51.84 AV	54	-2.16	-55.46	-51.25	6.43	-43.42

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

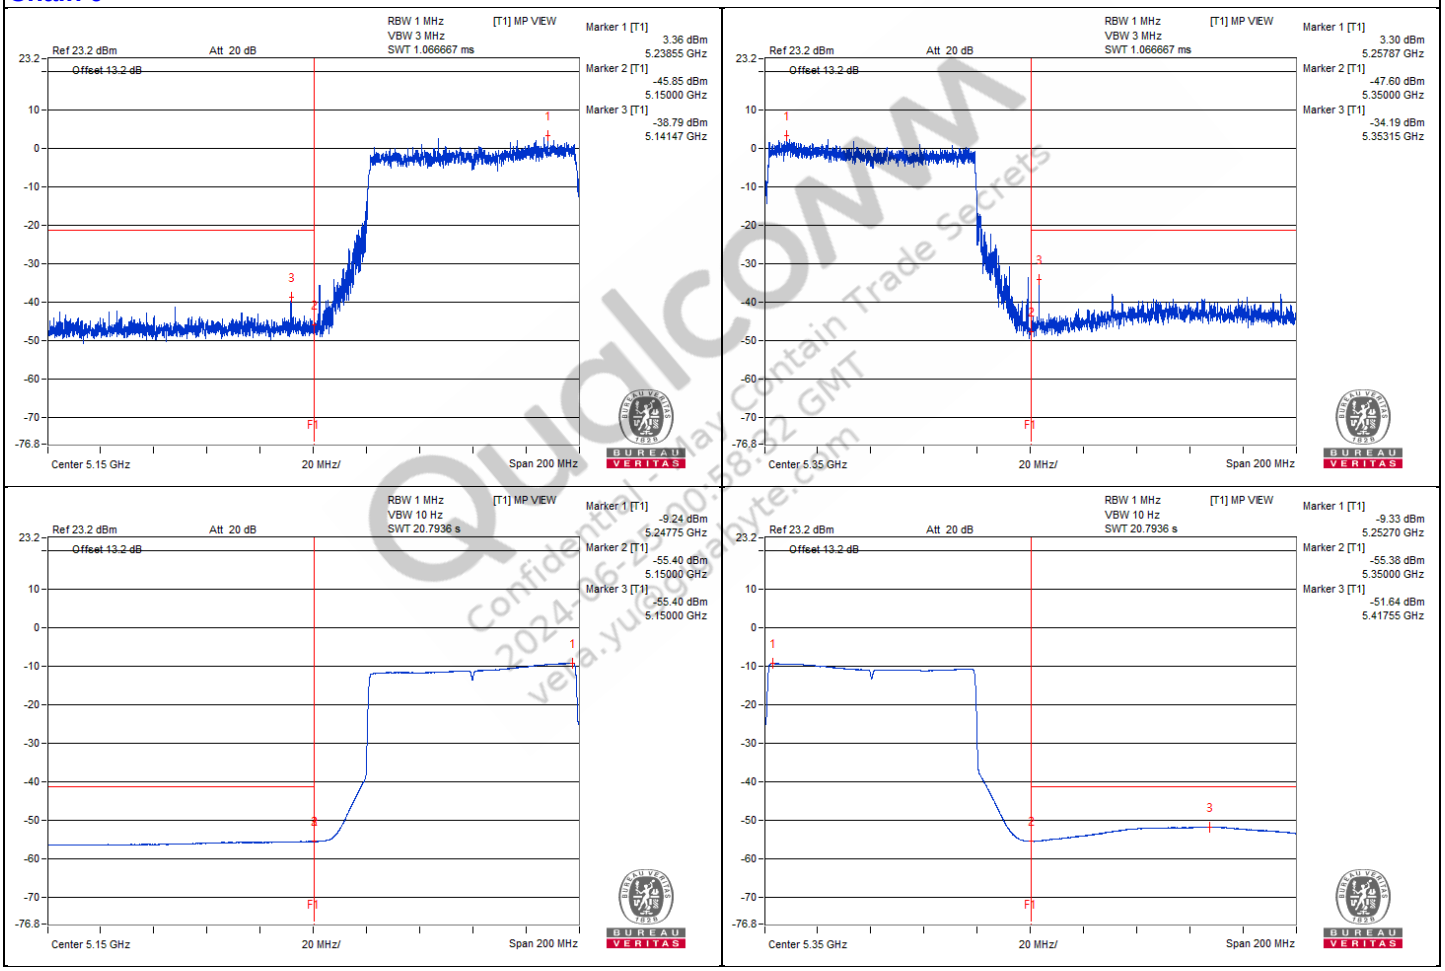



Qualcomm Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yuan@ahyte.com

Chain 1

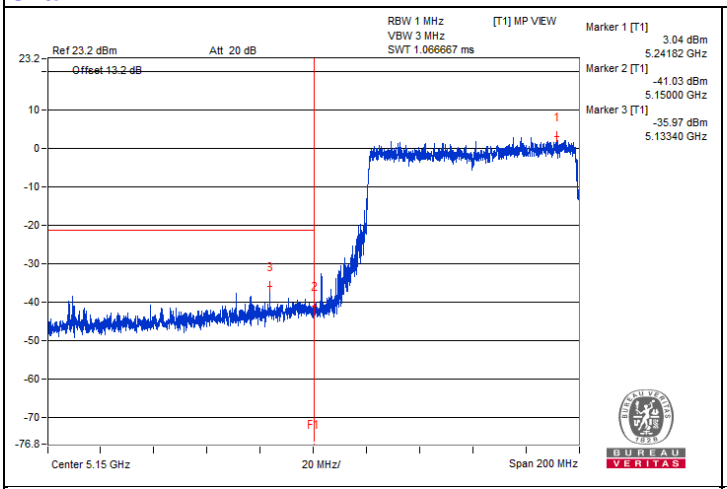

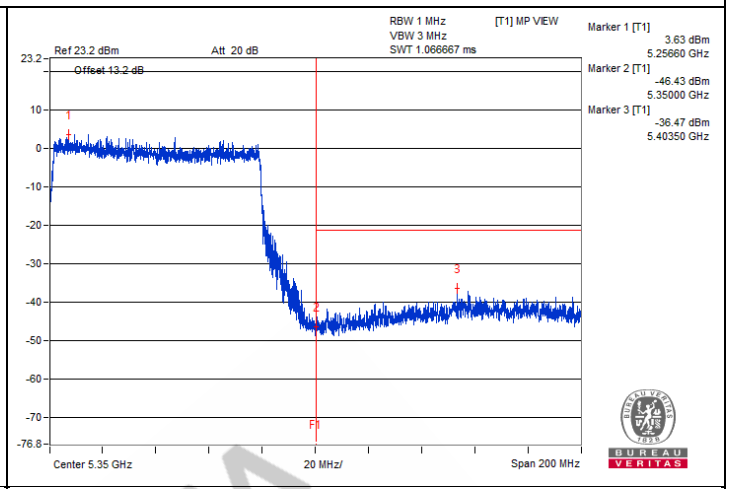

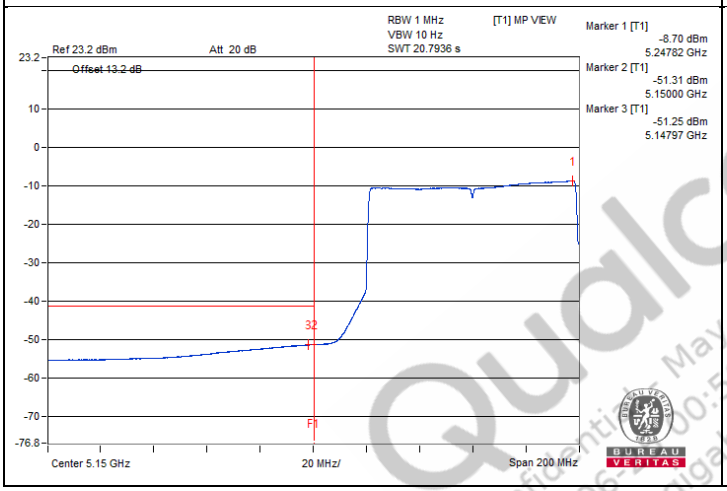

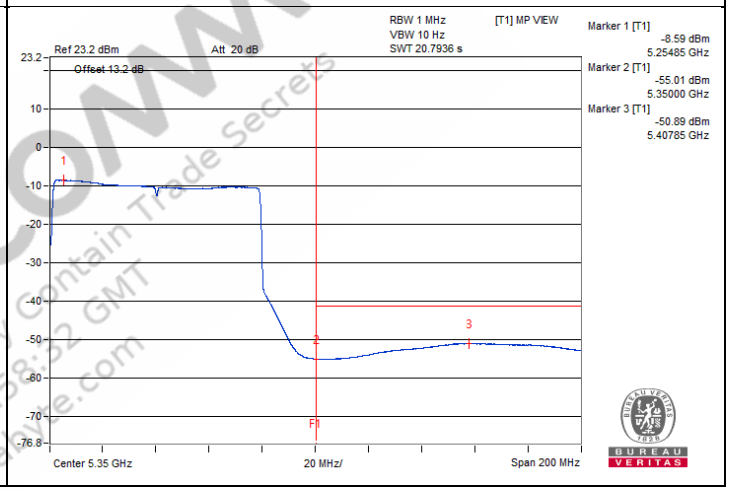

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalithe.com

802.11be (EHT160) – Channel 114

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3707.81	60.47 PK	74	-13.53	-47.11	-45.07	8.17	-34.79
2	3717.18	49.78 AV	54	-4.22	-56.68	-56.65	8.17	-45.48
3	7415.62	58.28 PK	74	-15.72	-48.28	-48.05	8.17	-36.98
4	7428.12	47.47 AV	54	-6.53	-58.85	-59.1	8.17	-47.79
5	11135.93	59.18 PK	74	-14.82	-47.51	-47.02	8.17	-36.08
6	11135.93	48.41 AV	54	-5.59	-58.14	-57.92	8.17	-46.85
7	#16720	47.84 PK	68.2	-20.36	-59.76	-57.69	8.17	-47.42


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

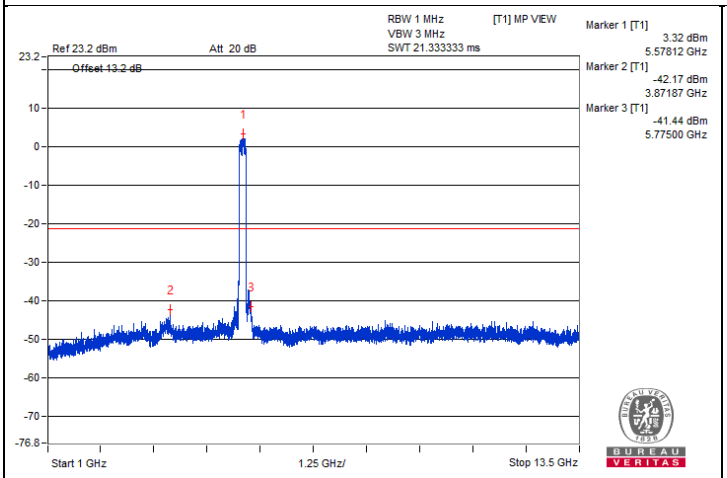


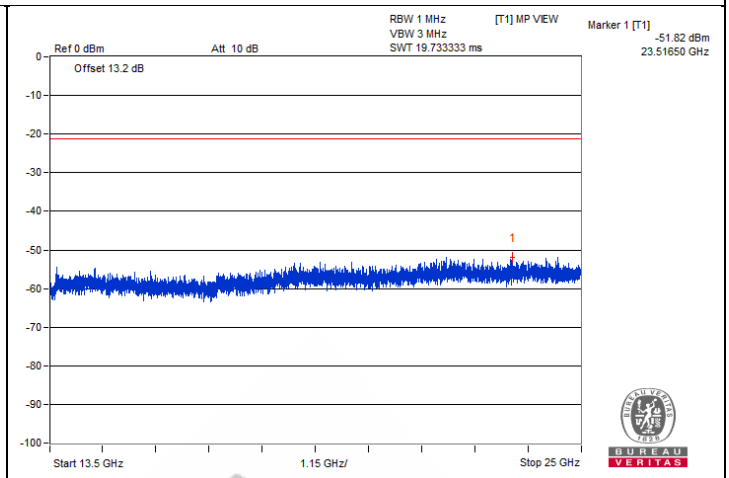

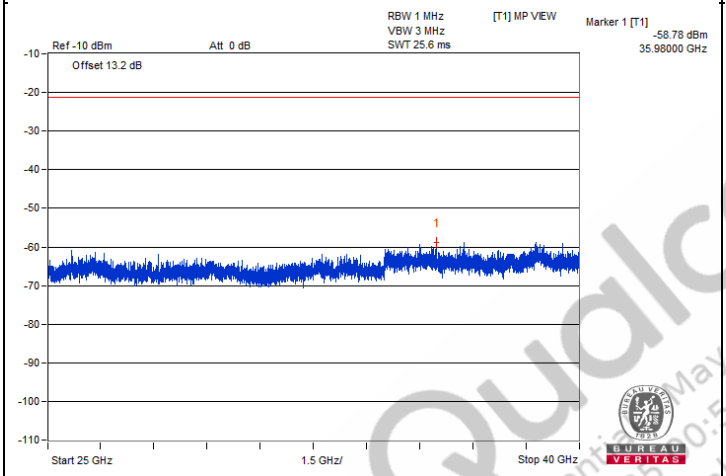

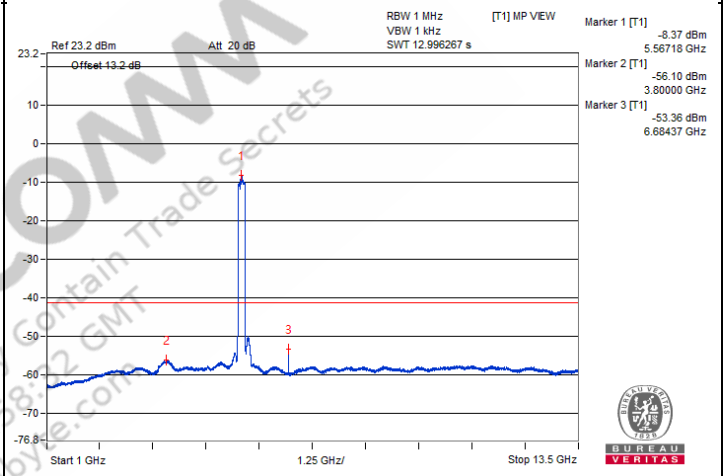


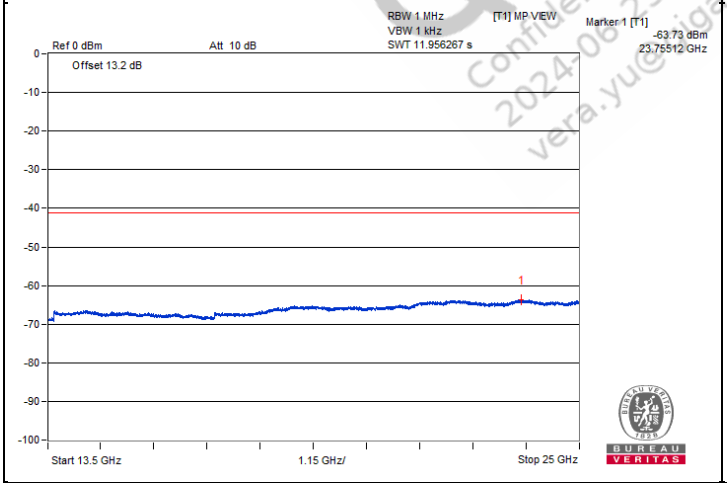


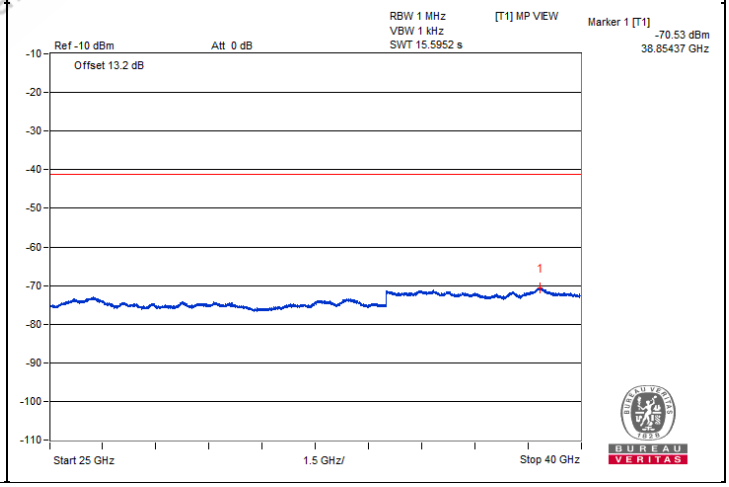



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

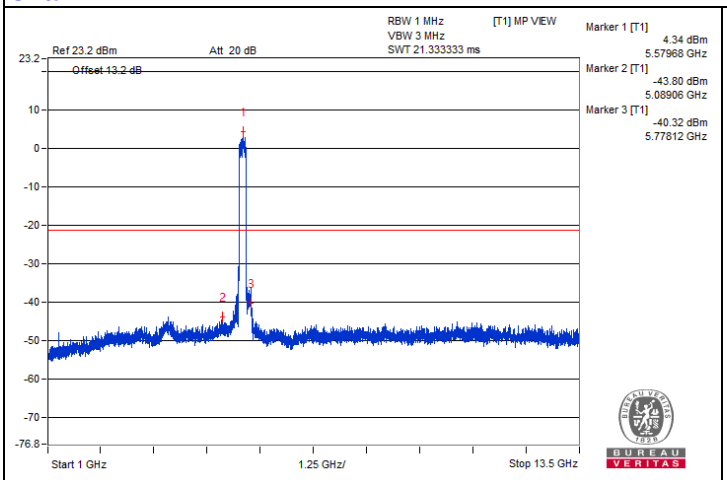


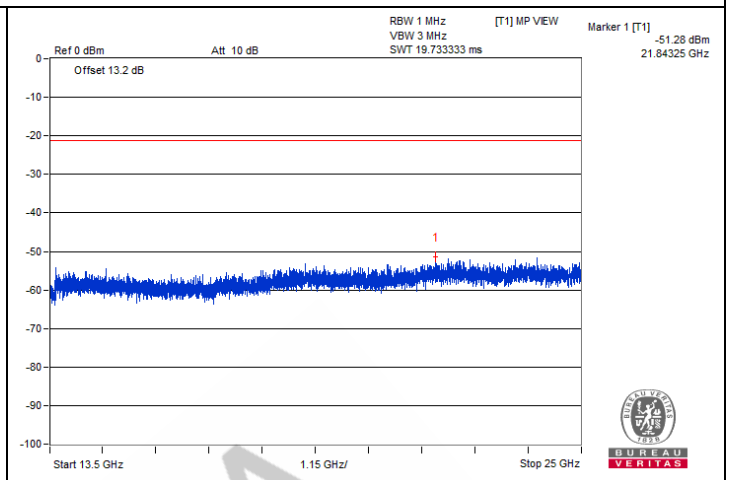

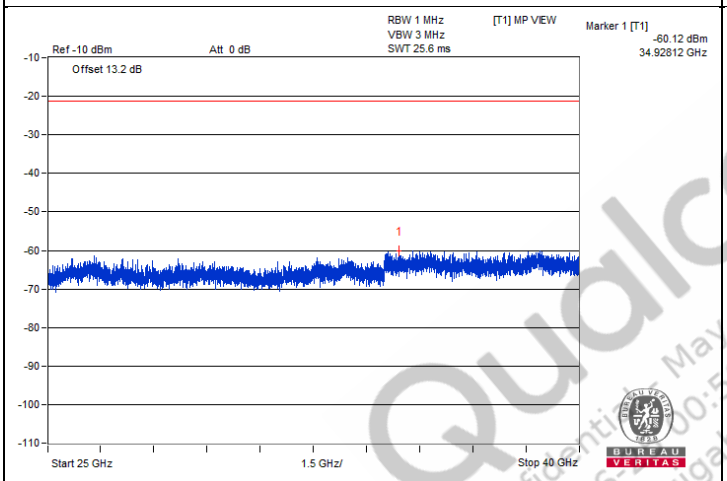

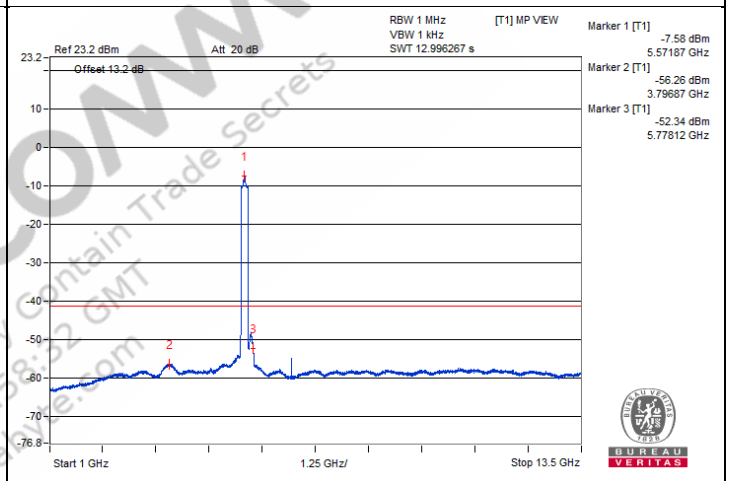

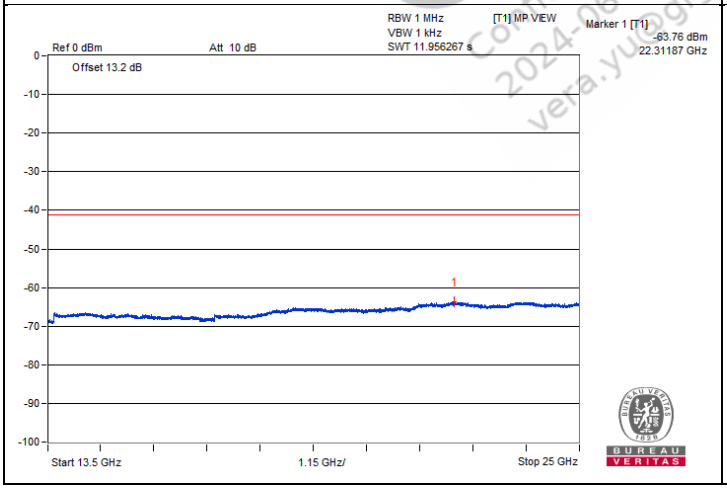

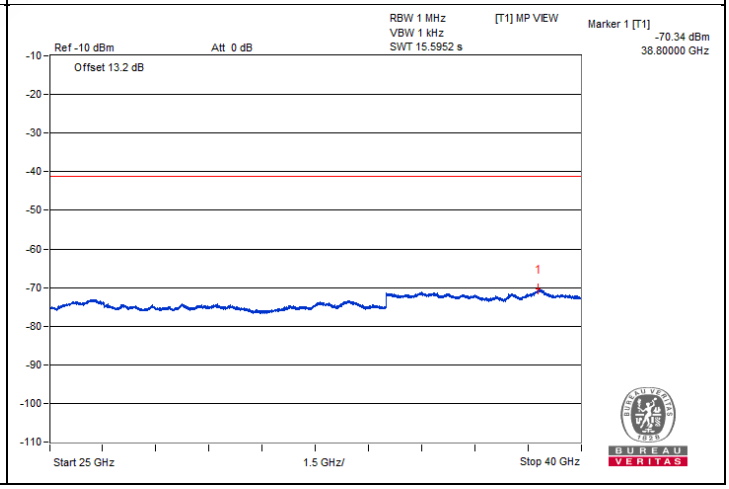

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gqatvre.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5467	66.09 PK	68.2	-2.11	-37.34	-48.1	7.82	-29.17

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

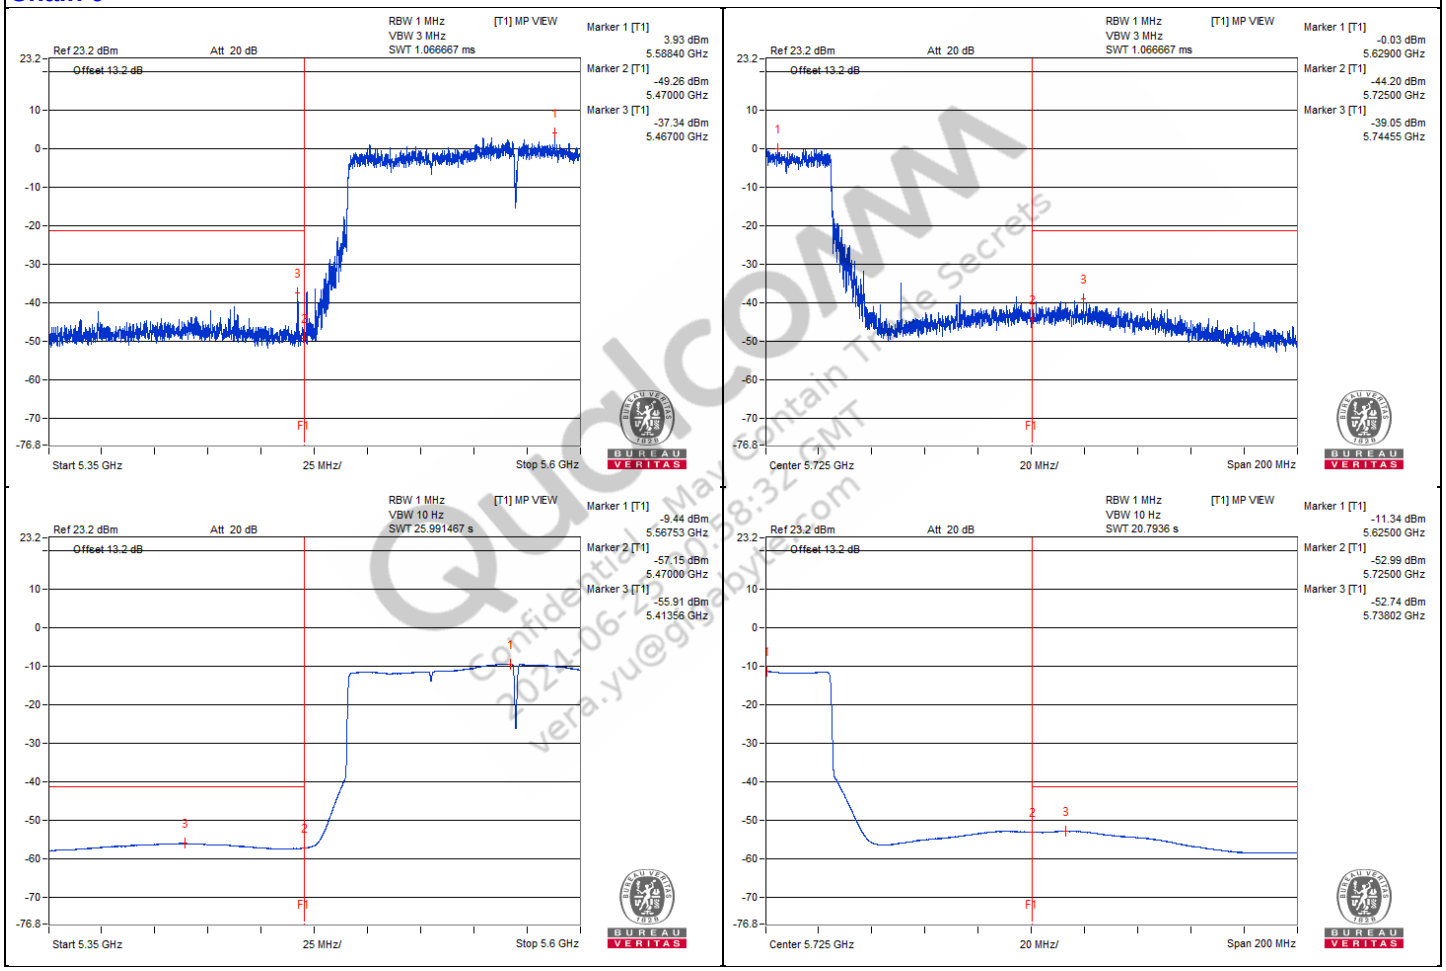



Qualcomm
Confidential | May Contain Trade Secrets
2024-06-20 20:18:32 GMT
vera.yu@gigabyte.com

Chain 1

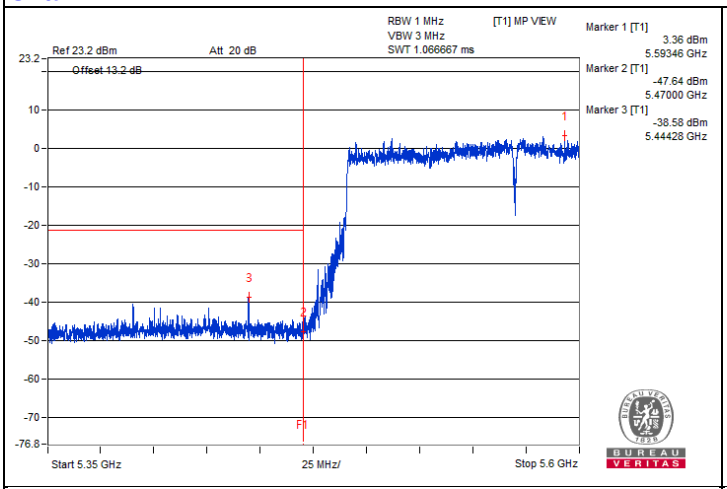

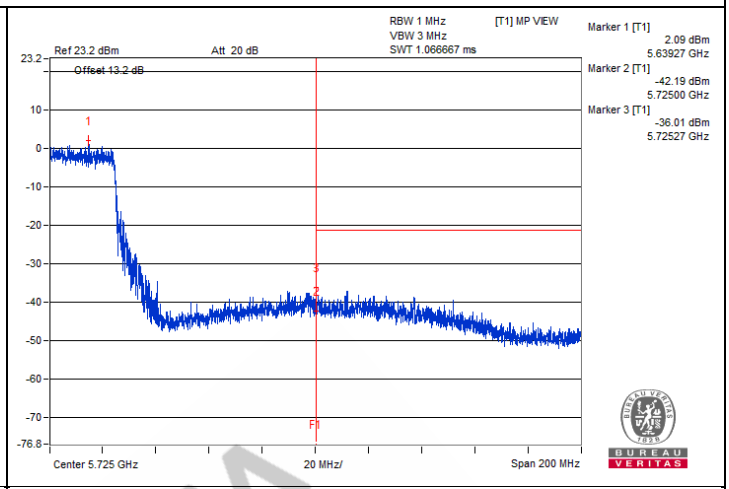

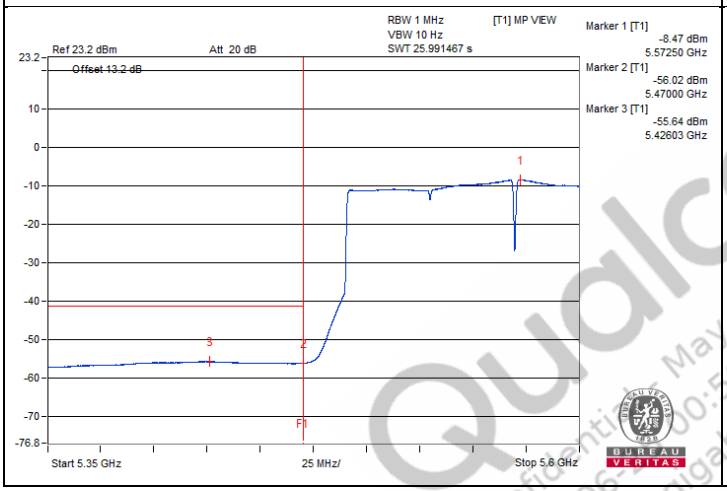

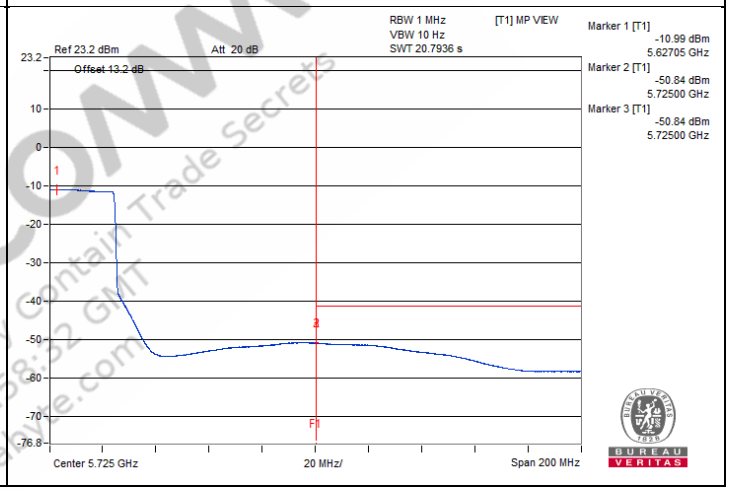

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-[illegible] 00:58:32 GMT
vera.yu@gigalive.com

802.11be (EHT20) 26-tone RU - Channel 36

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3446.87	58.11 PK	68.2	-10.09	-48.21	-48.45	8.17	-37.15
2	#6907.81	58.19 PK	68.2	-10.01	-48.32	-48.18	8.17	-37.07
3	#10357.81	58.83 PK	68.2	-9.37	-47.45	-47.77	8.17	-36.43
4	15557.06	47.9 PK	74	-26.1	-58.26	-58.83	8.17	-47.36
5	15549.87	38.84 AV	54	-15.16	-67.39	-67.82	8.17	-56.42


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

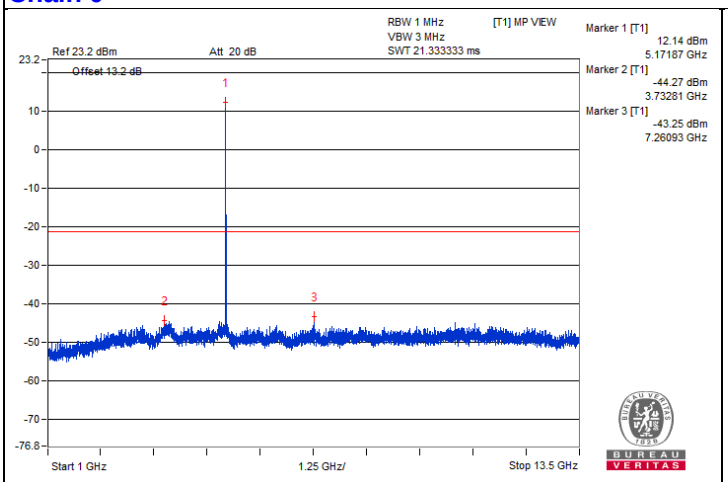


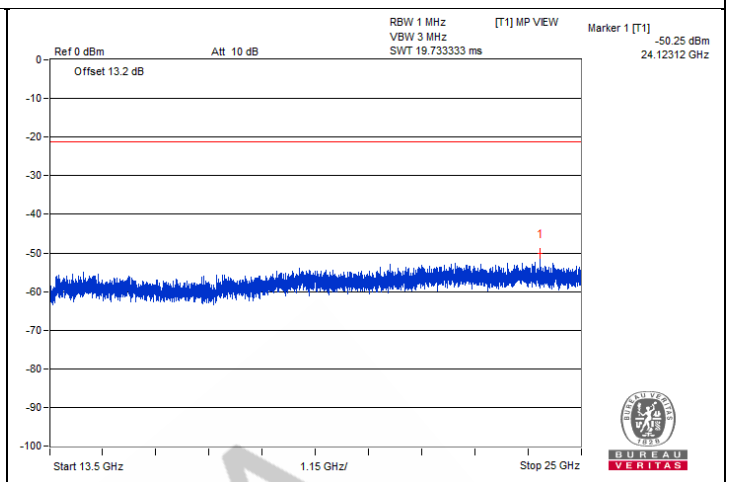

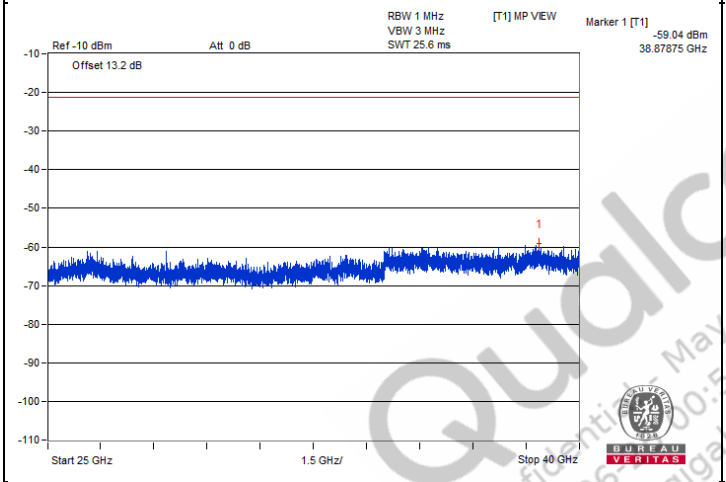

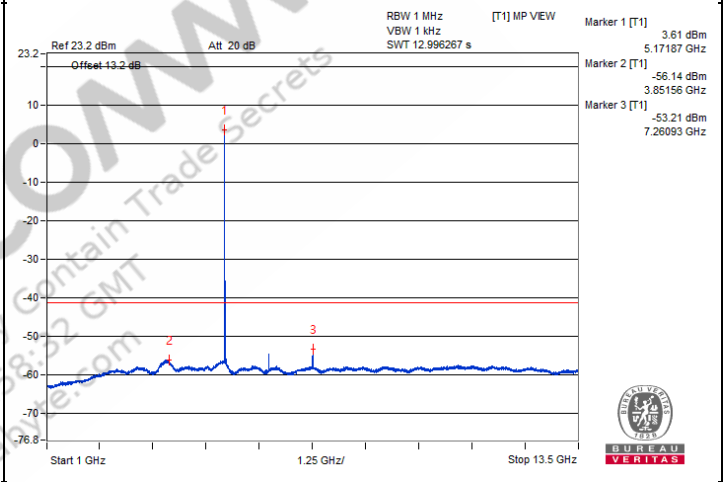


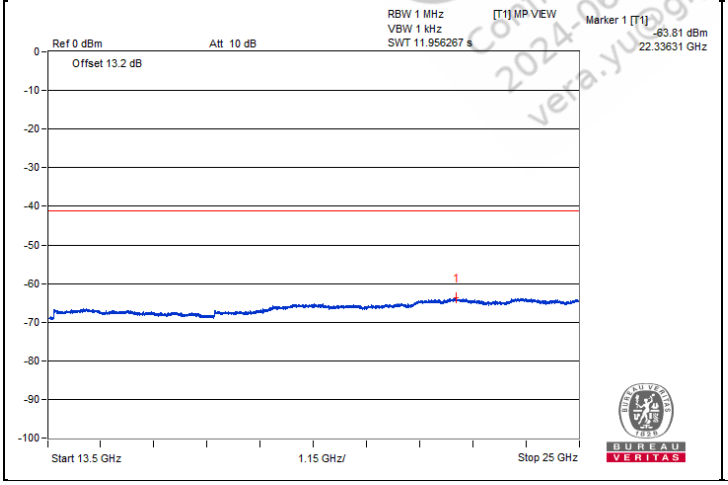


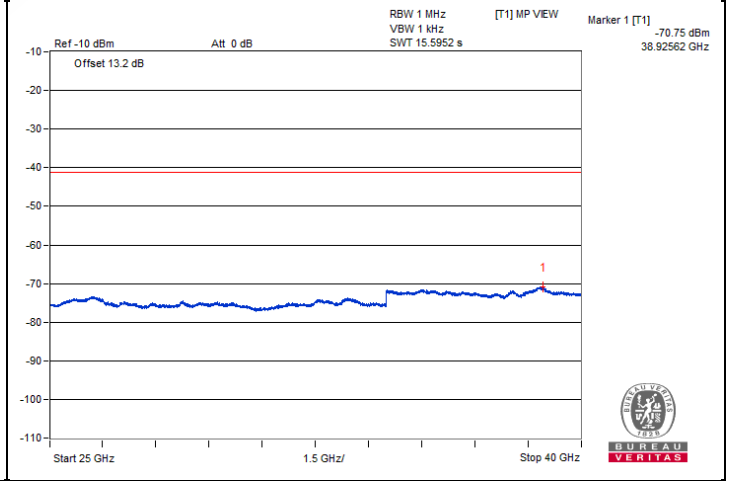



QualcoMM
Confidential - May Contain Trade Secrets
2024-06-[illegible] 00:58:32 GMT
vera.yu@gigahertz.com


Chain 1

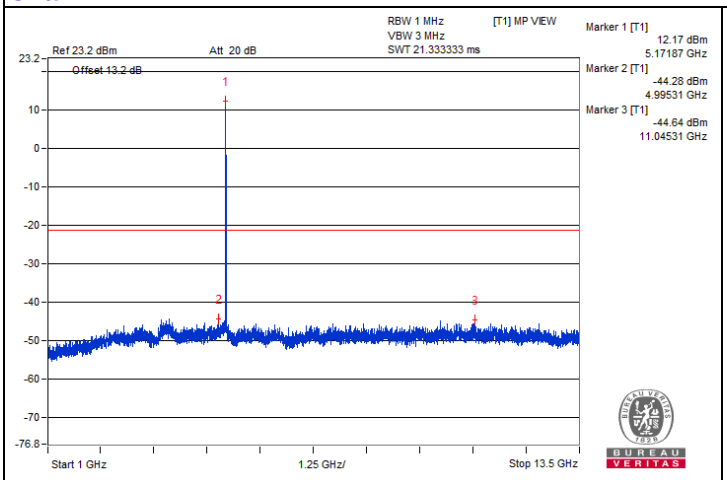


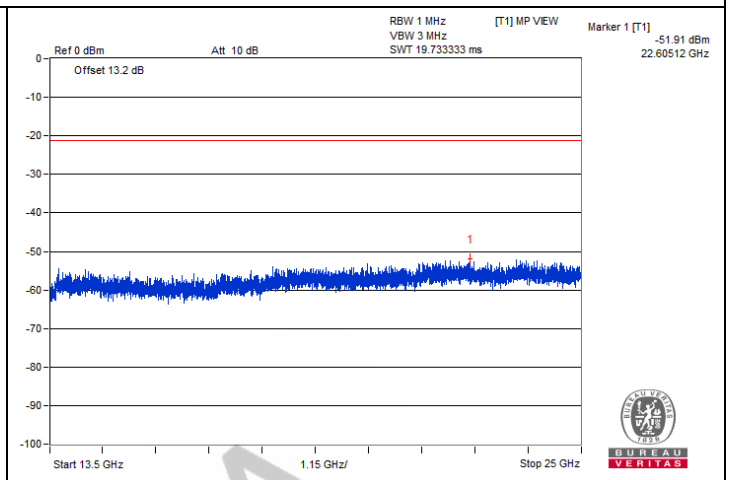

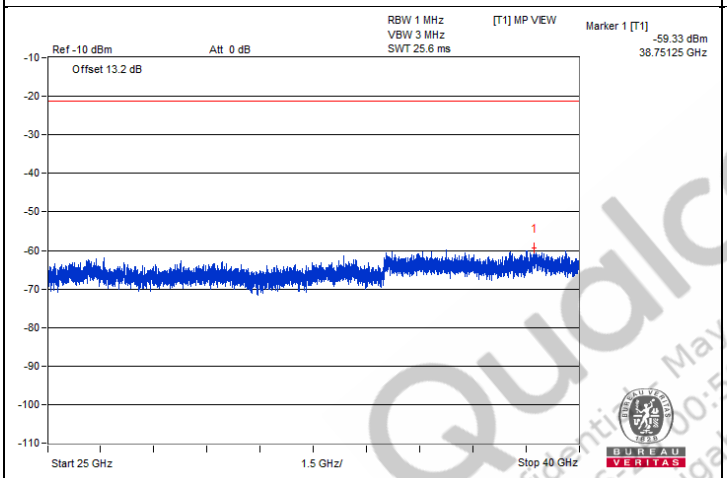

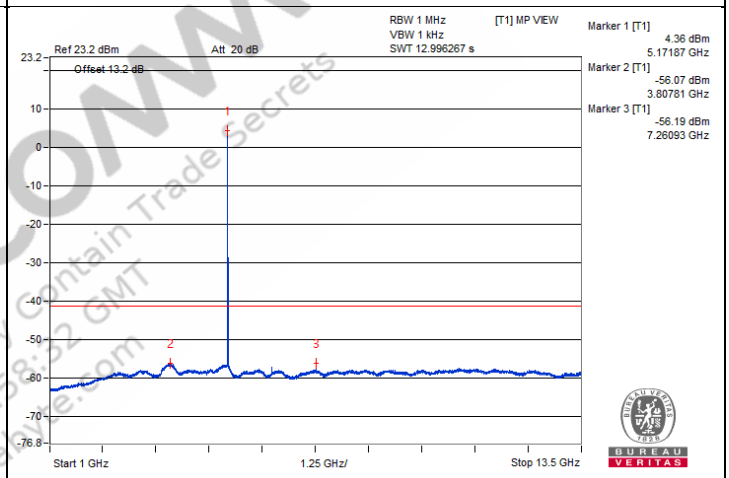

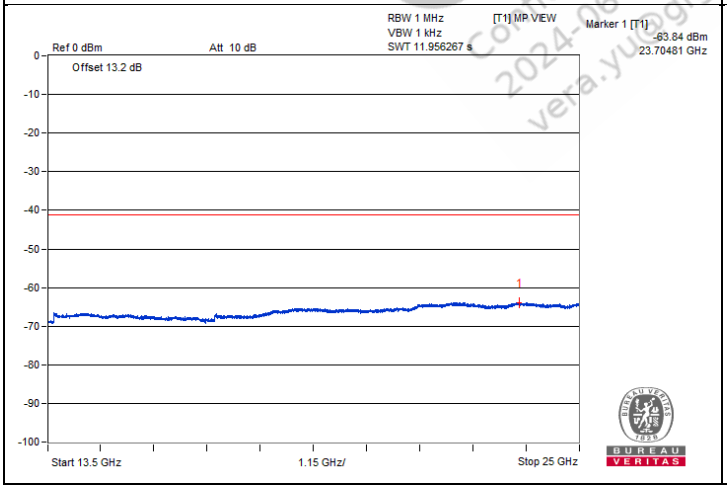

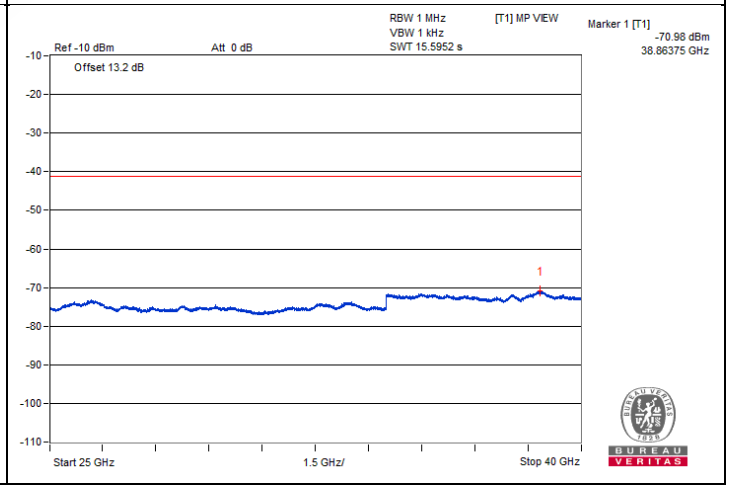

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5132.52	59.44 PK	74	-14.56	-43.92	-46.98	6.36	-35.82
2	5137.9	47.17 AV	54	-6.83	-57.34	-57.58	6.36	-48.09

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

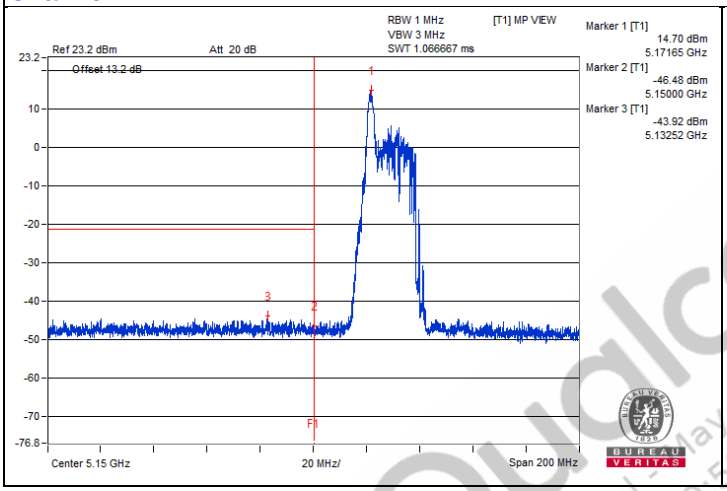

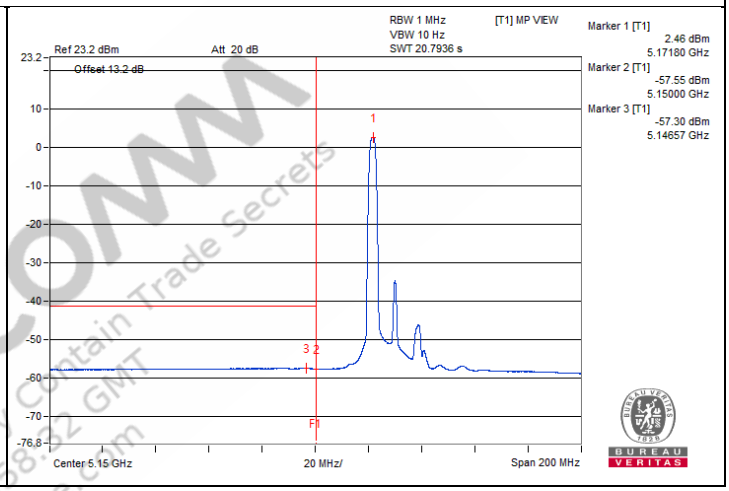

Chain 1

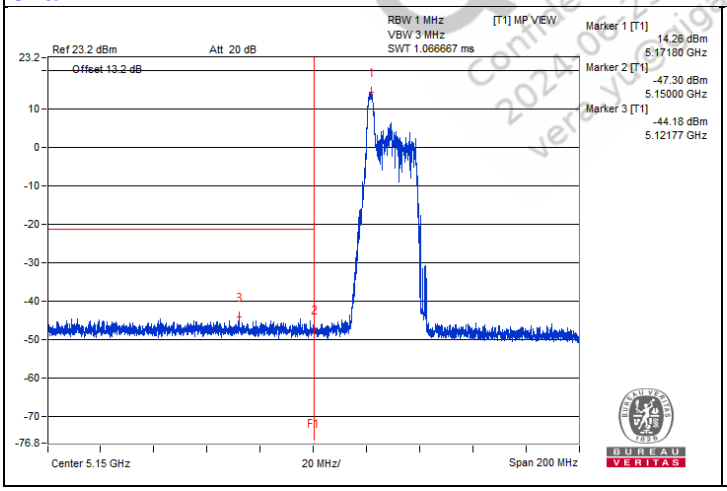

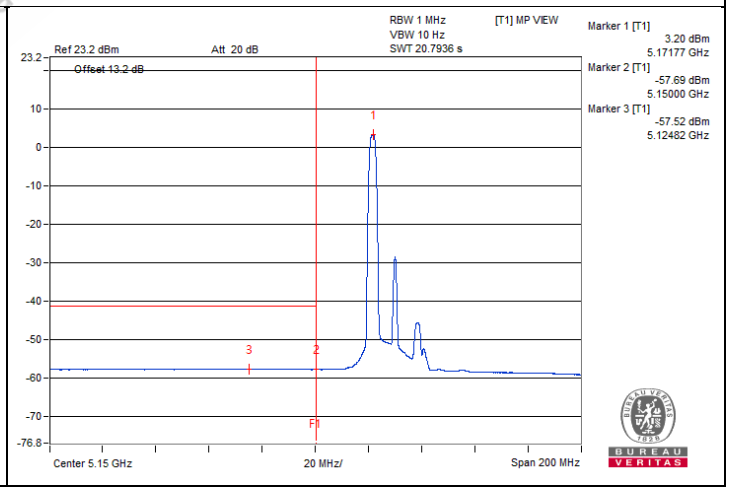

Qualcomm Confidential – May Contain Trade Secrets
2024-06-25 00:58:32 GMT
verax-vc-gigabyte.com

802.11be (EHT20) 26-tone RU - Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3467.18	57.34 PK	68.2	-10.86	-49.06	-49.15	8.17	-37.92
2	#6948.43	62.02 PK	68.2	-6.18	-43.96	-44.94	8.17	-33.24
3	#10392.18	60.28 PK	68.2	-7.92	-46.31	-46.01	8.17	-34.98
4	15601.62	54.58 PK	74	-19.42	-51.94	-51.79	8.17	-40.68
5	15601.62	43.19 AV	54	-10.81	-63.37	-63.14	8.17	-52.07


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

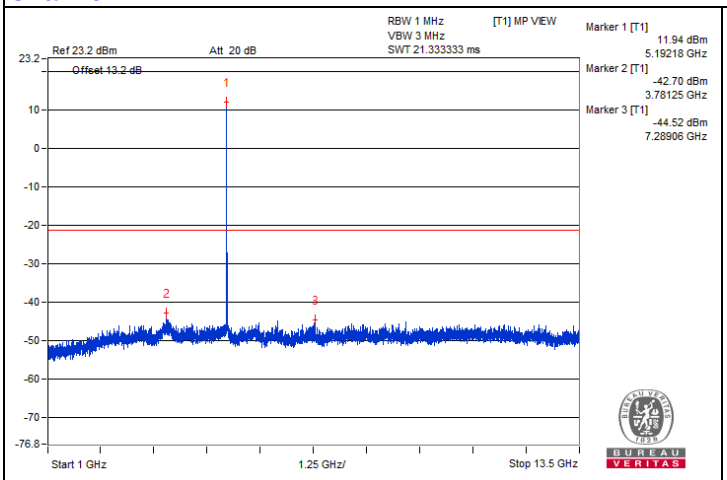


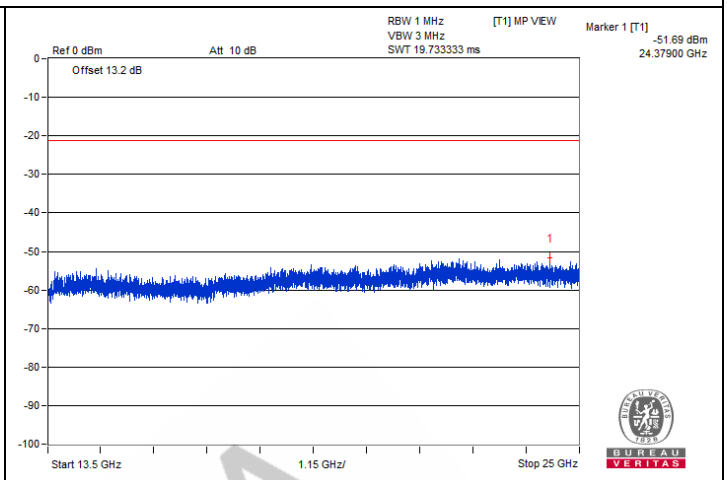

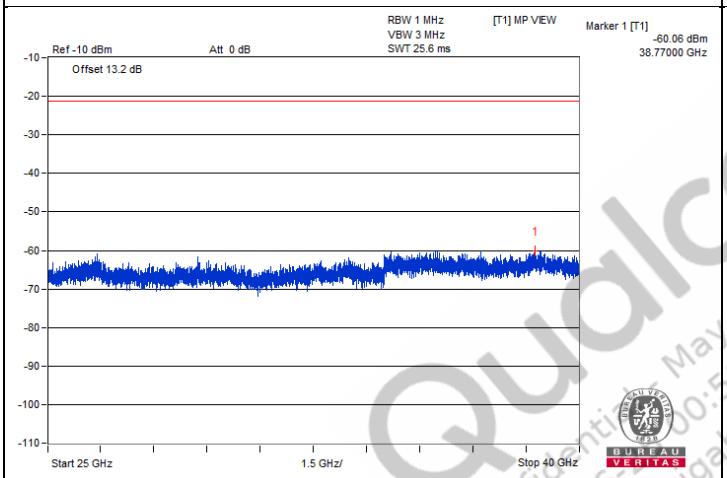

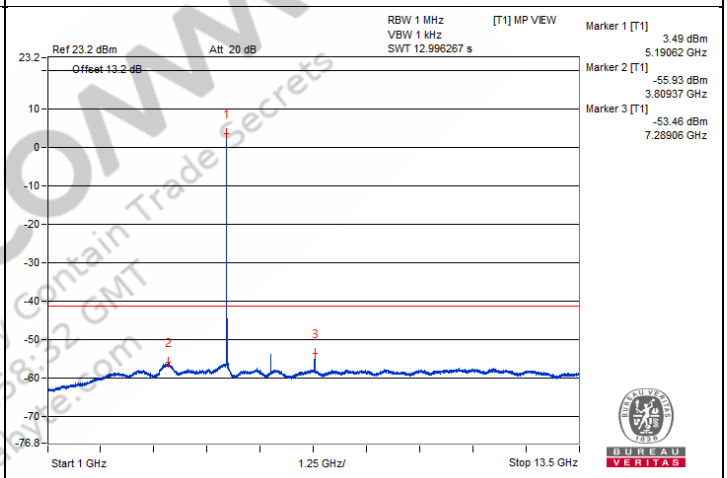


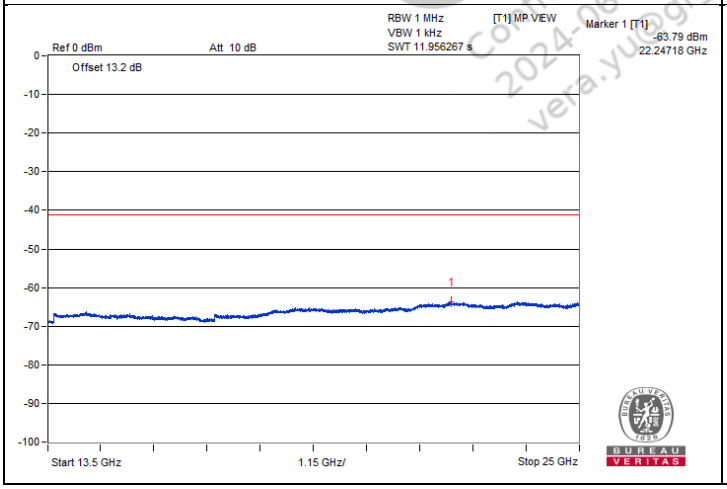


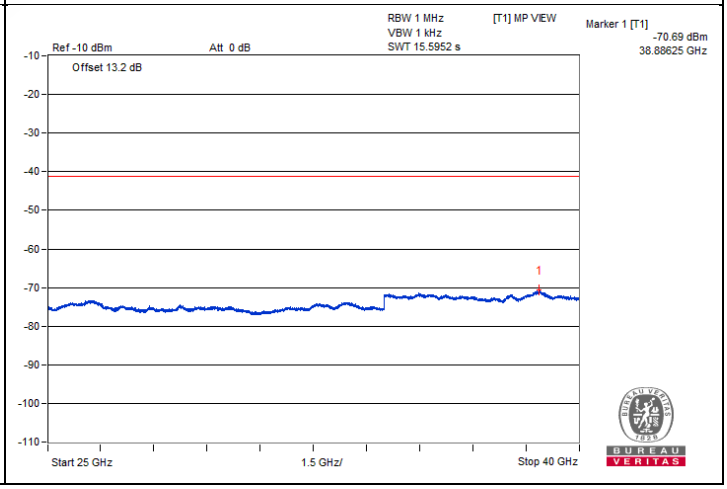



QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Chain 1

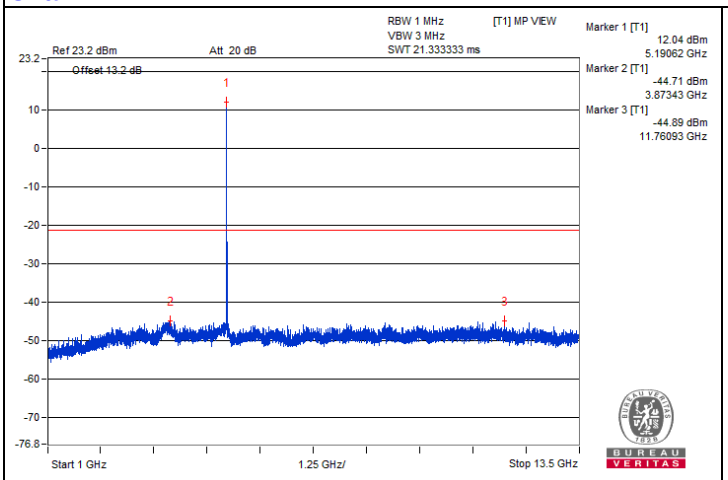


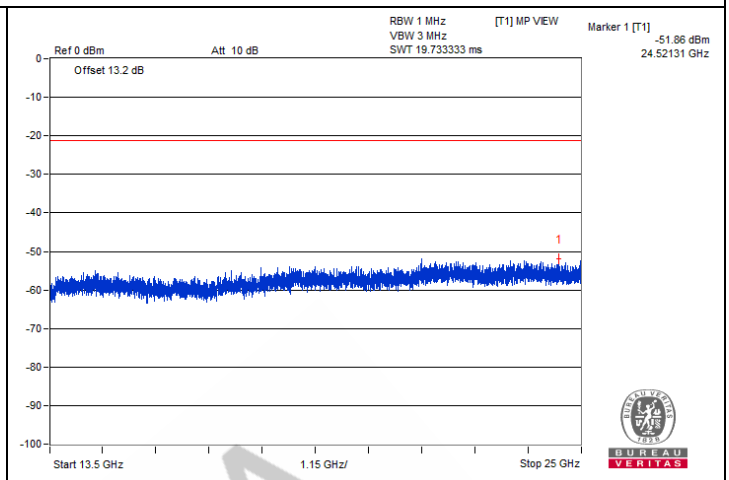

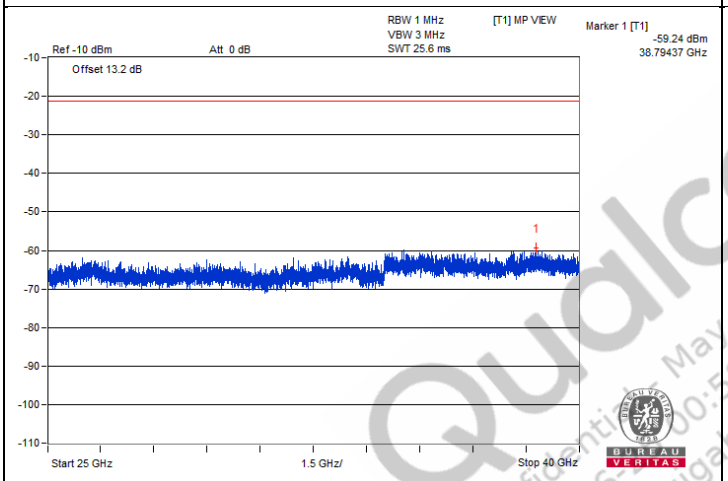

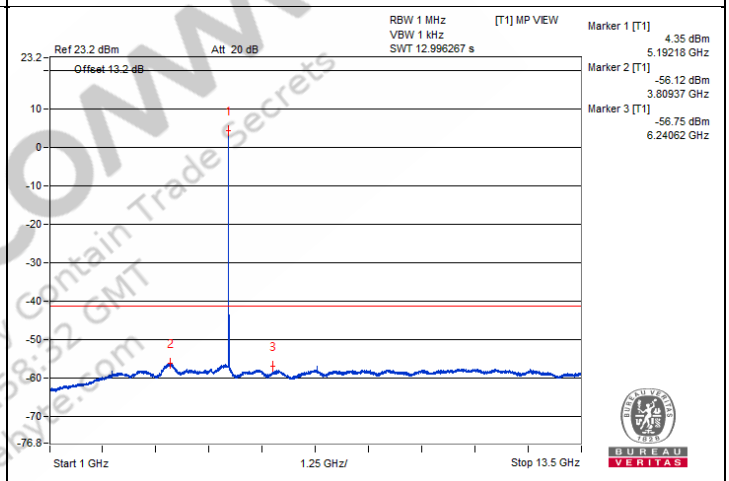

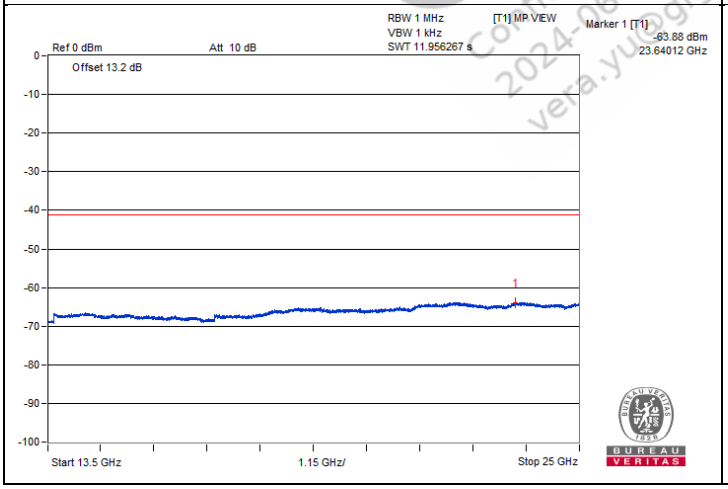

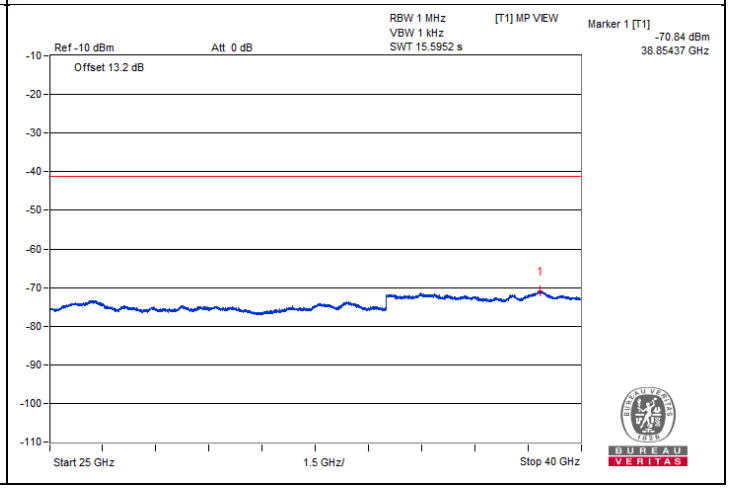

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5085.52	59.96 PK	74	-14.04	-43.84	-45.71	6.36	-35.30
2	5147.1	47.02 AV	54	-6.98	-57.56	-57.66	6.36	-48.24

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

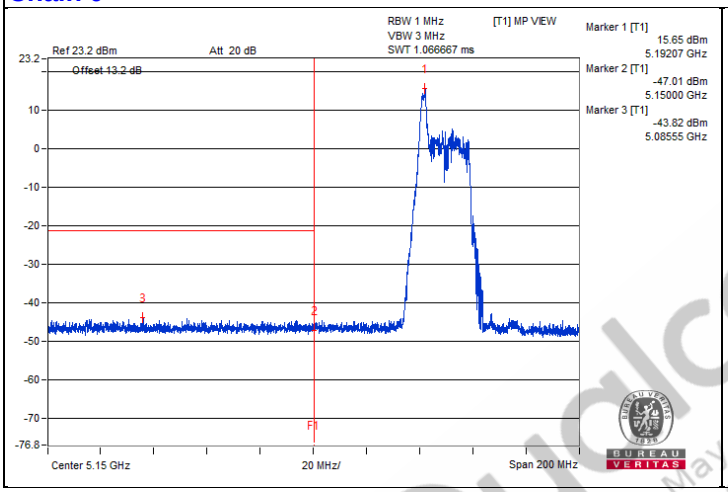

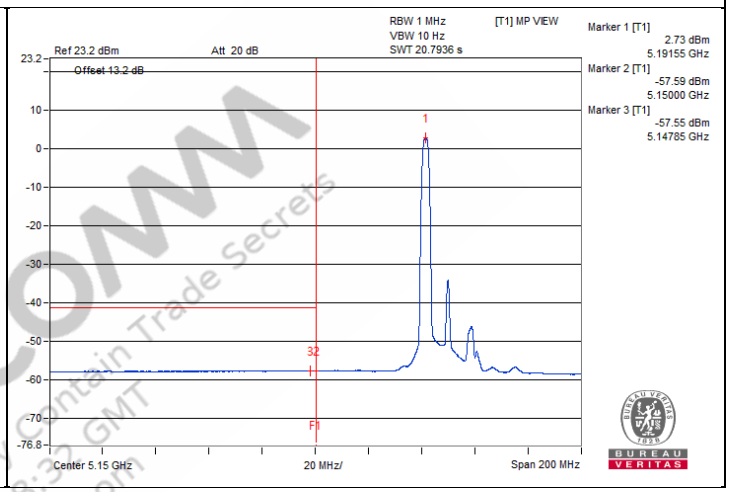

Chain 1

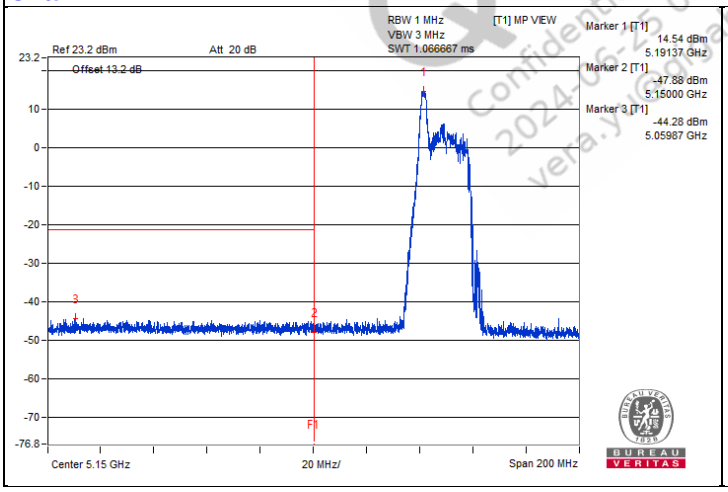

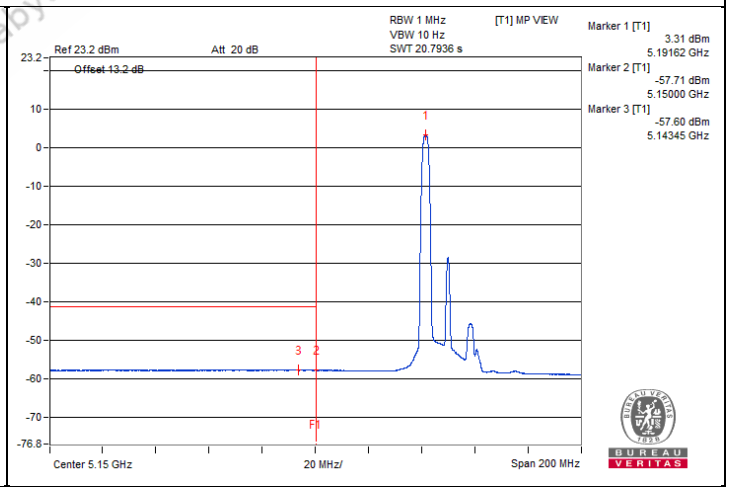

Qualcomm Confidential - May contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@conexyte.com

802.11be (EHT20) 26-tone RU - Channel 48

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3510.93	56.9 PK	74	-17.1	-49.35	-49.73	8.17	-38.36
2	3506.25	46.09 AV	54	-7.91	-60.26	-60.44	8.17	-49.17
3	#6990.62	63.39 PK	68.2	-4.81	-42	-44.43	8.17	-31.87
4	#10489.06	60.95 PK	68.2	-7.25	-45.05	-45.99	8.17	-34.31
5	15719.5	54.08 PK	74	-19.92	-52.27	-52.45	8.17	-41.18
6	15720.93	43.45 AV	54	-10.55	-63.2	-62.79	8.17	-51.81


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

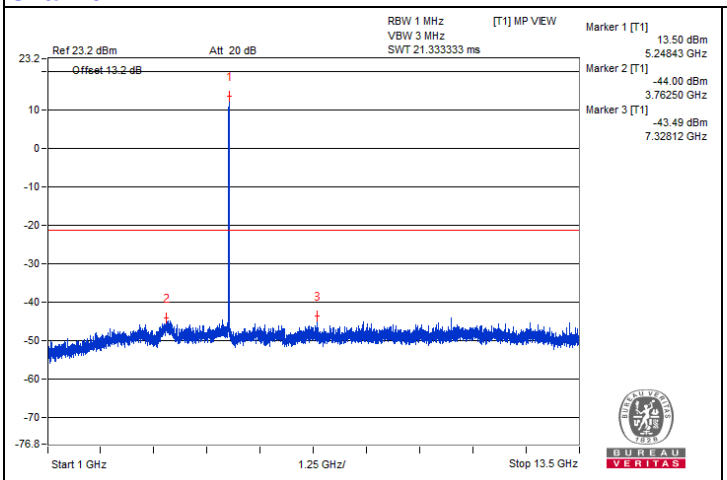


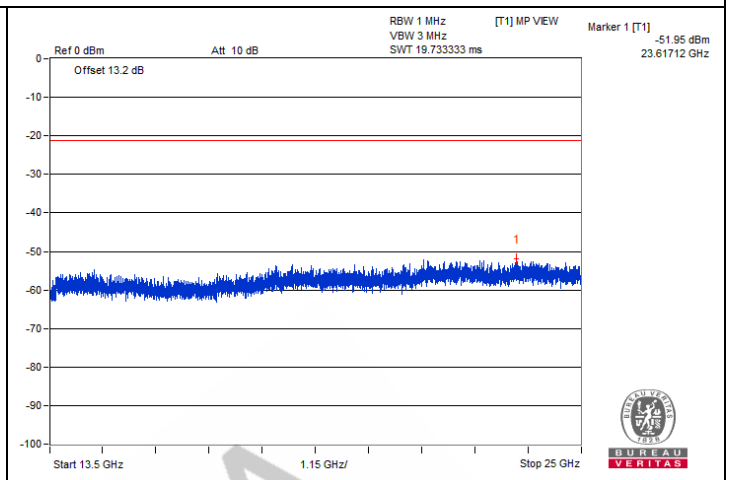

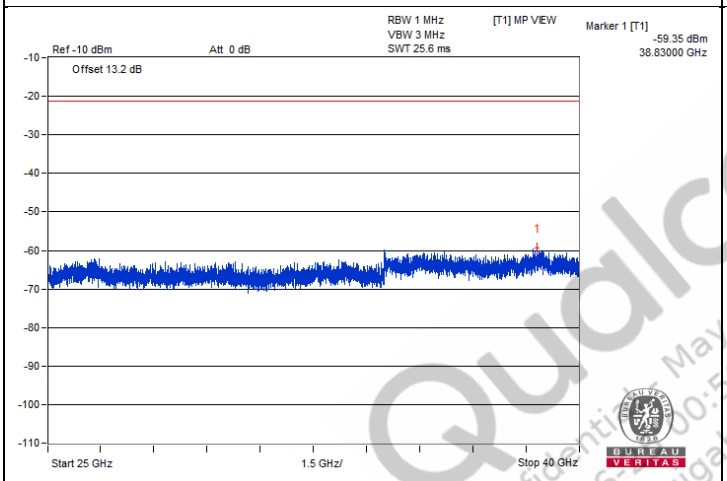

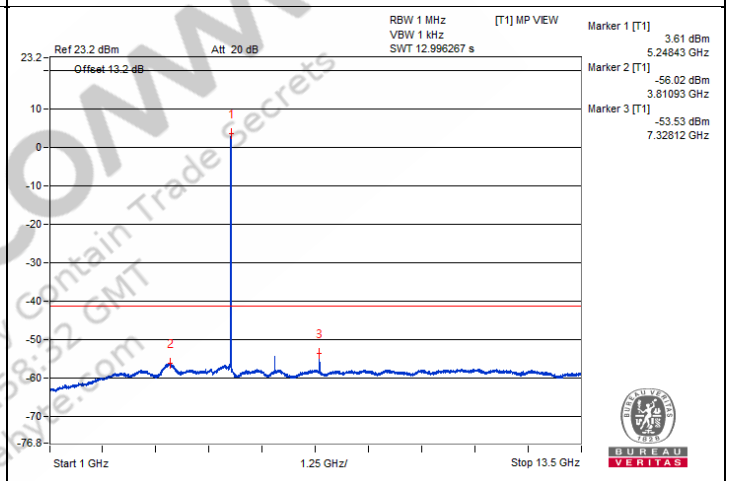


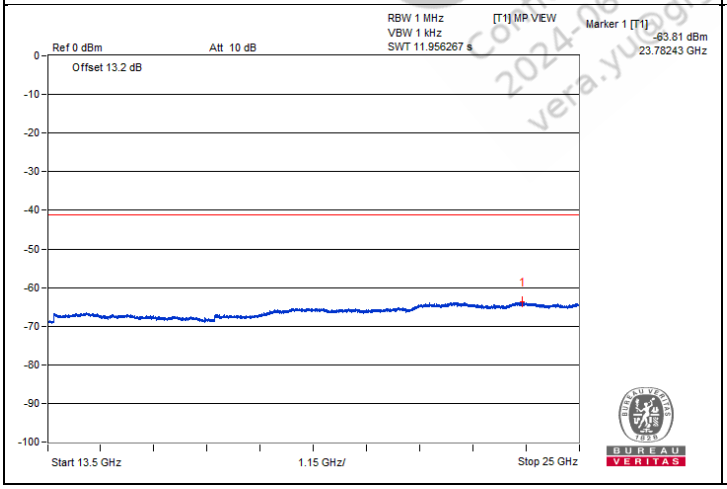


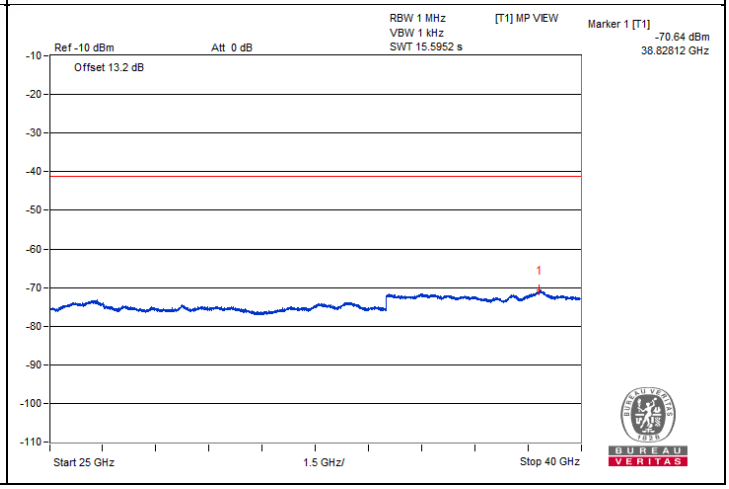



QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Chain 1

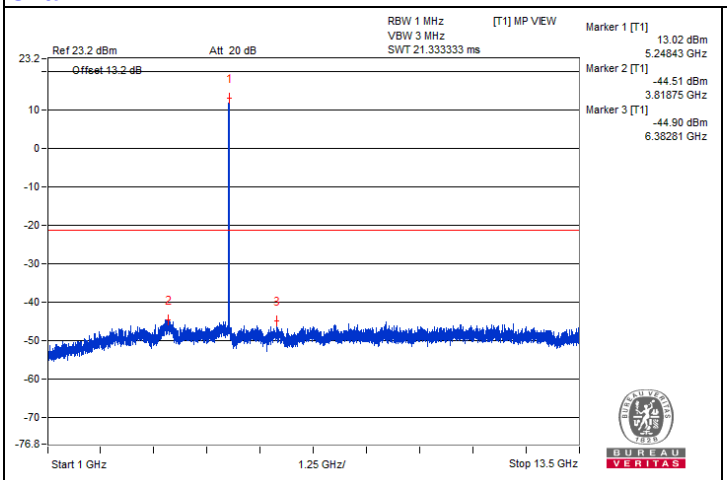


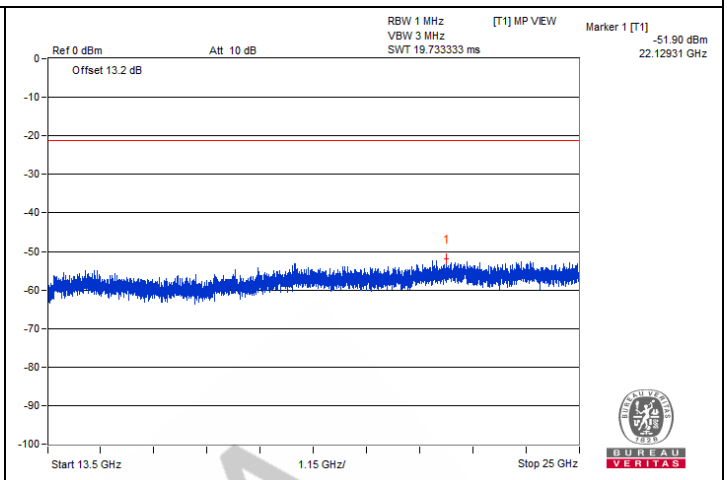

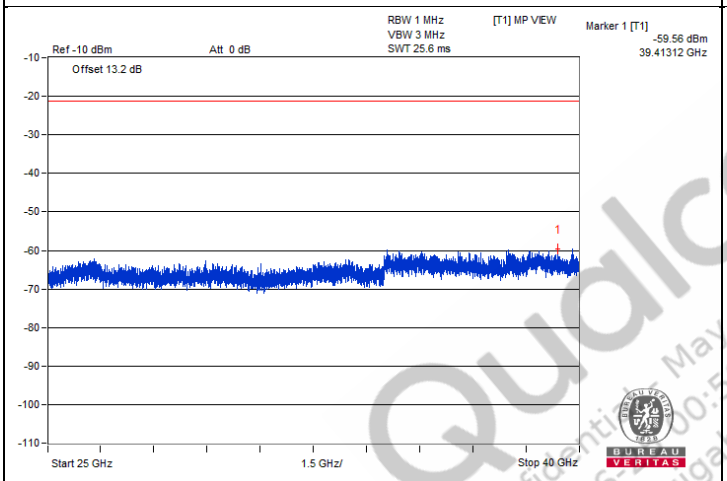

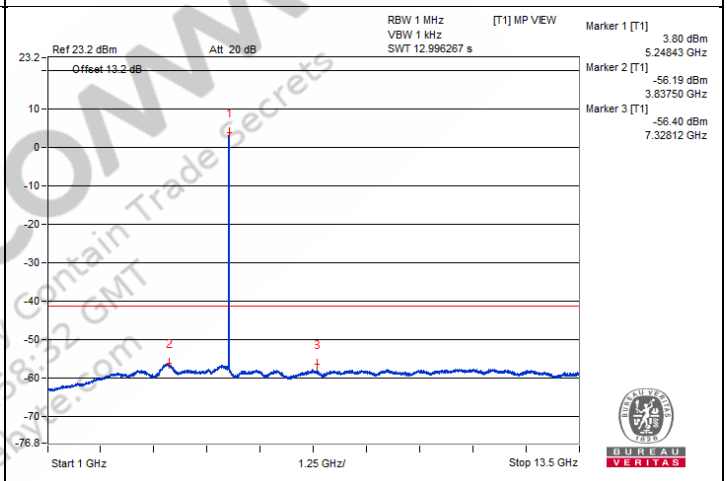

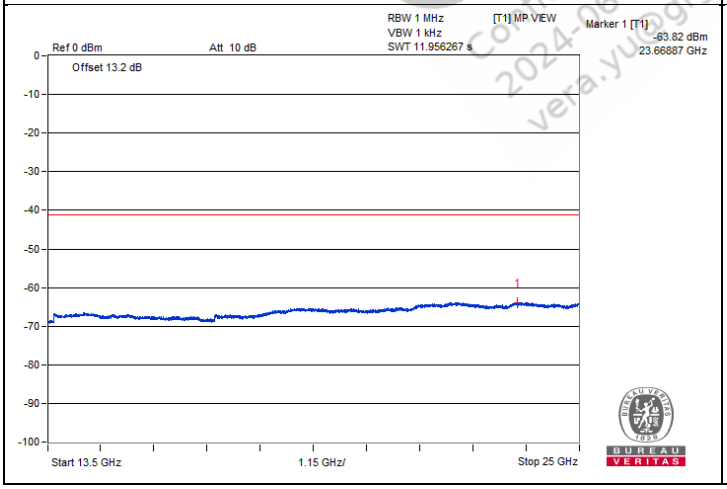

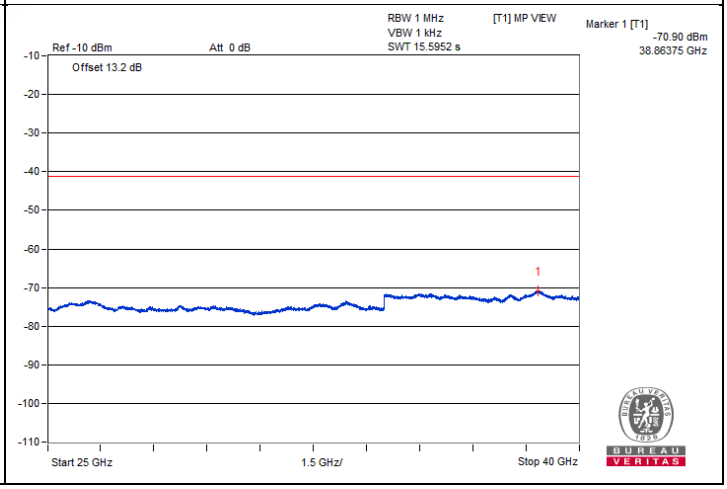

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5064.27	59.61 PK	74	-14.39	-45.17	-44.88	6.36	-35.65
2	5064.2	46.88 AV	54	-7.12	-57.79	-57.72	6.36	-48.38

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

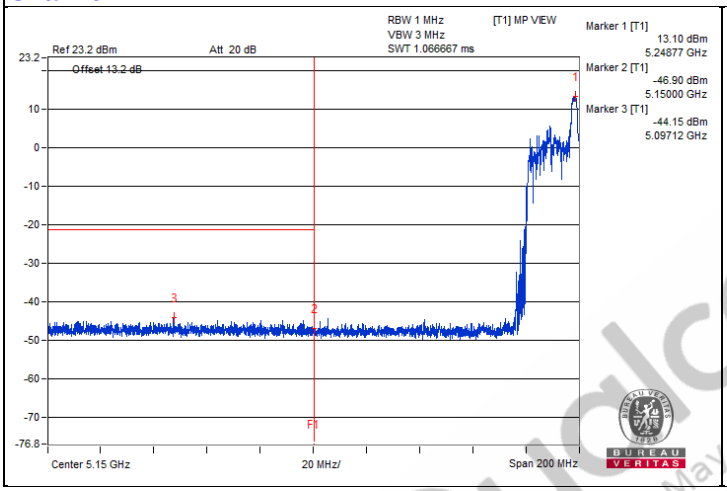

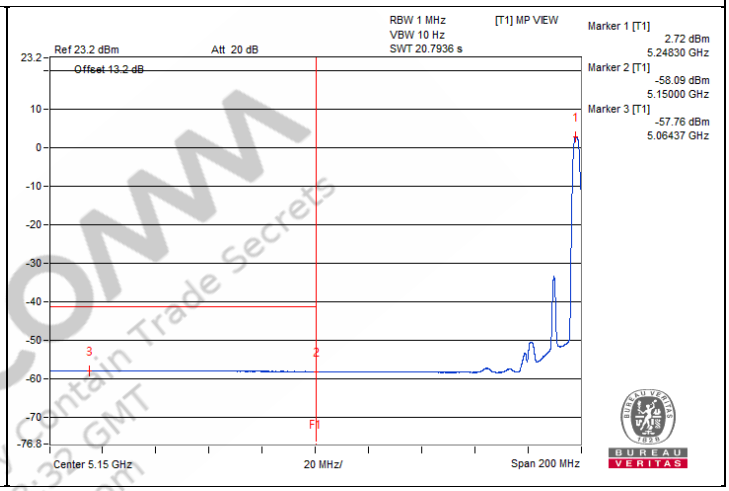

Chain 1

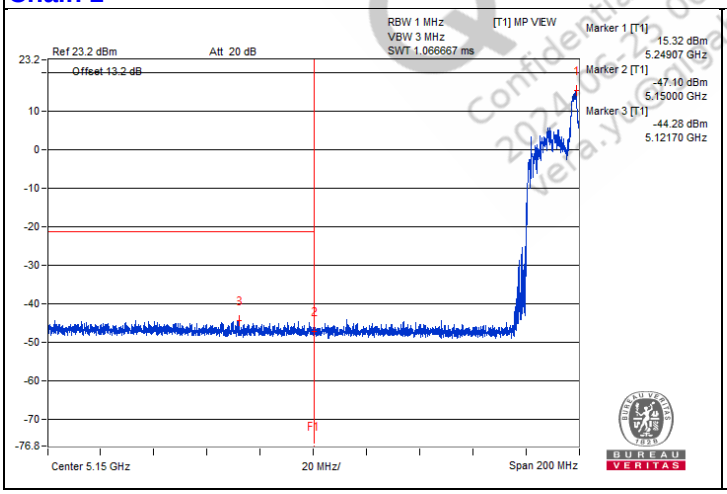

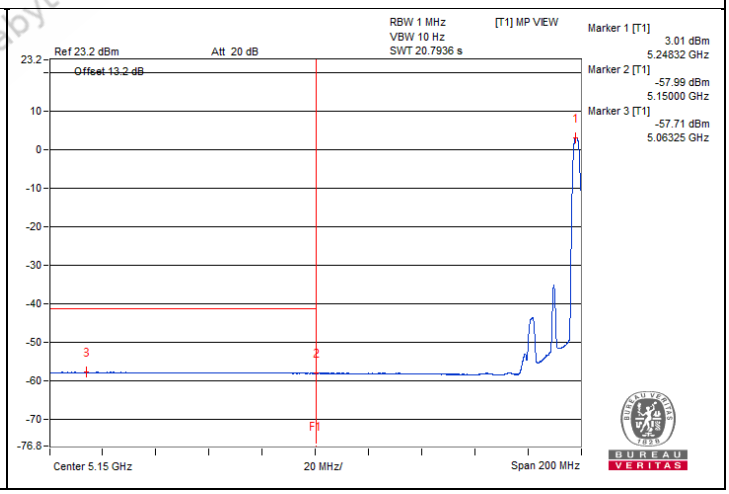

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:39 GMT
vera.yuan@cybyte.com

802.11be (EHT20) 26-tone RU - Channel 52

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3506.25	57.34 PK	74	-16.66	-48.59	-49.68	8.17	-37.92
2	3504.68	46.02 AV	54	-7.98	-60.38	-60.46	8.17	-49.24
3	#6998.43	62.34 PK	68.2	-5.86	-44.78	-43.52	8.17	-32.92
4	#10528.12	60.99 PK	68.2	-7.21	-45.68	-45.24	8.17	-34.27
5	15771.25	54.61 PK	74	-19.39	-53.42	-50.67	8.17	-40.65
6	15772.68	43.82 AV	54	-10.18	-62.9	-62.36	8.17	-51.44


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

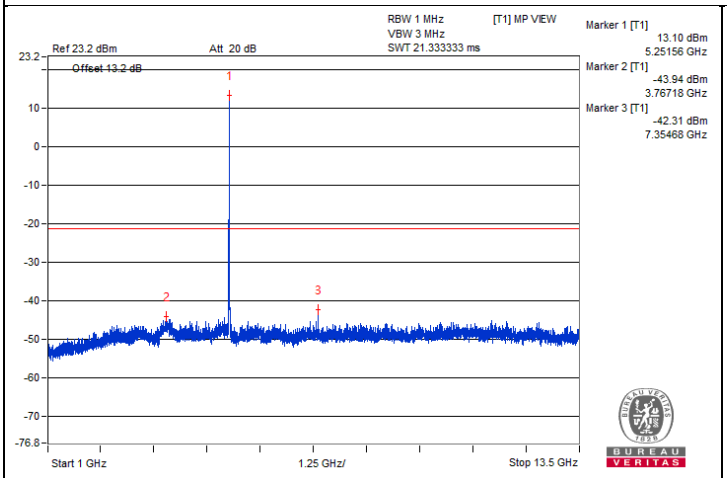


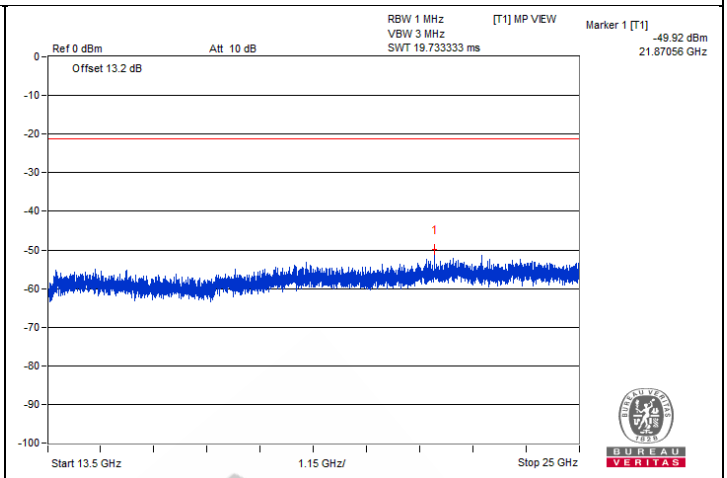

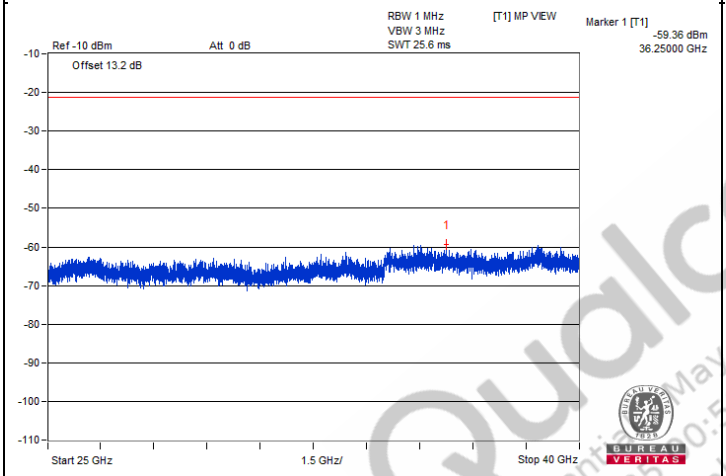

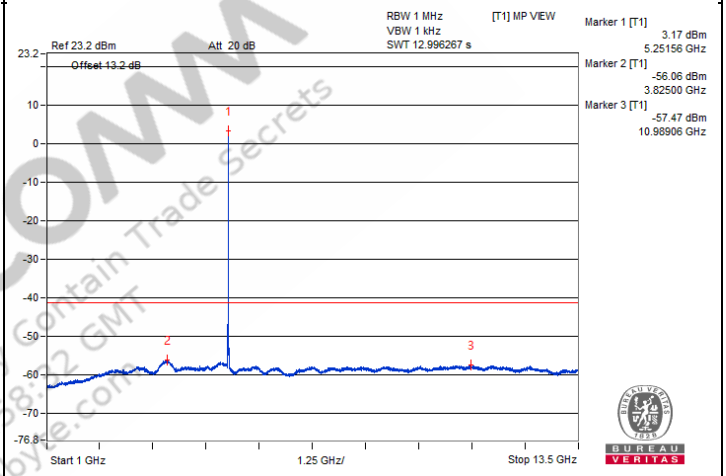


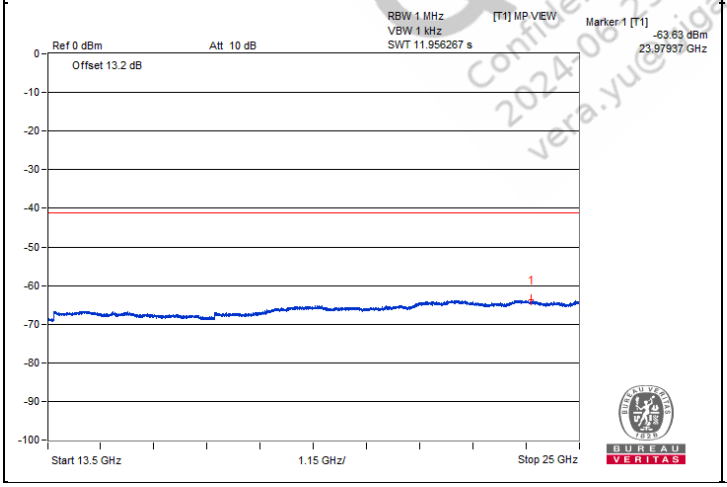


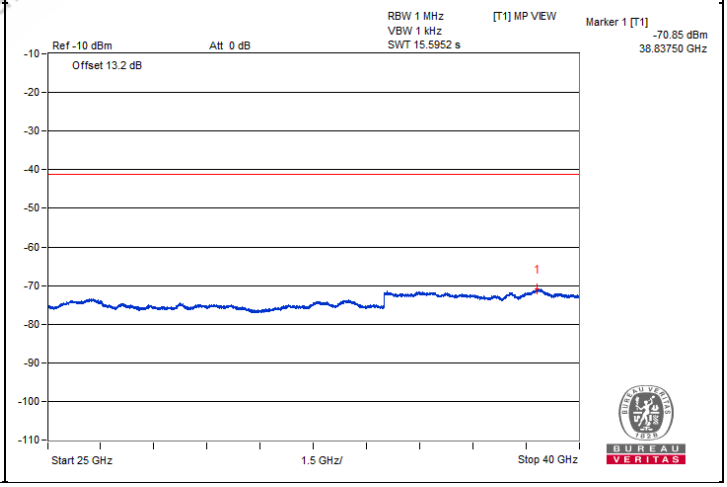



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

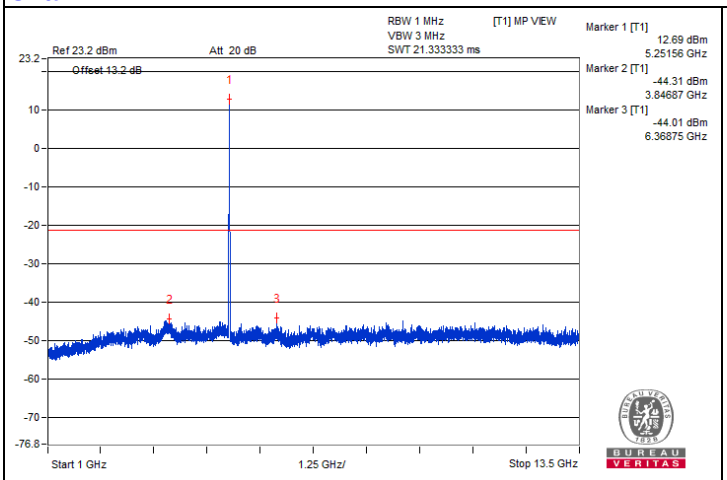


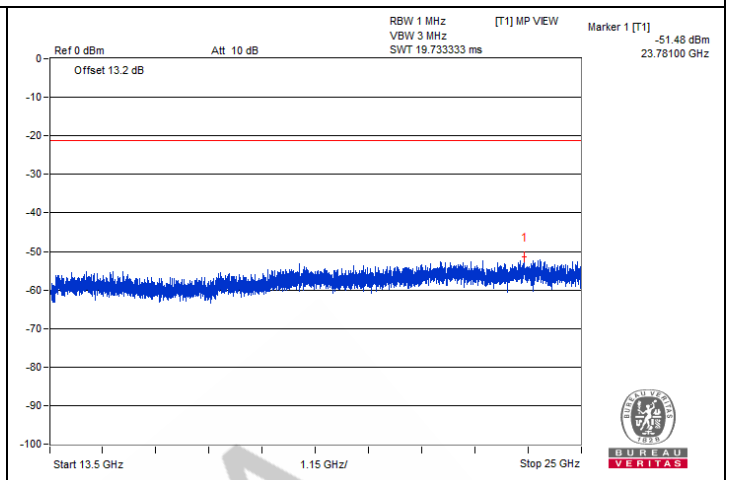

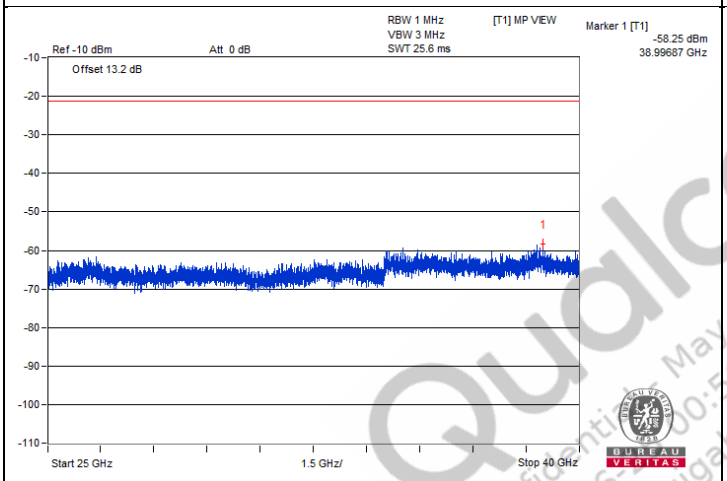

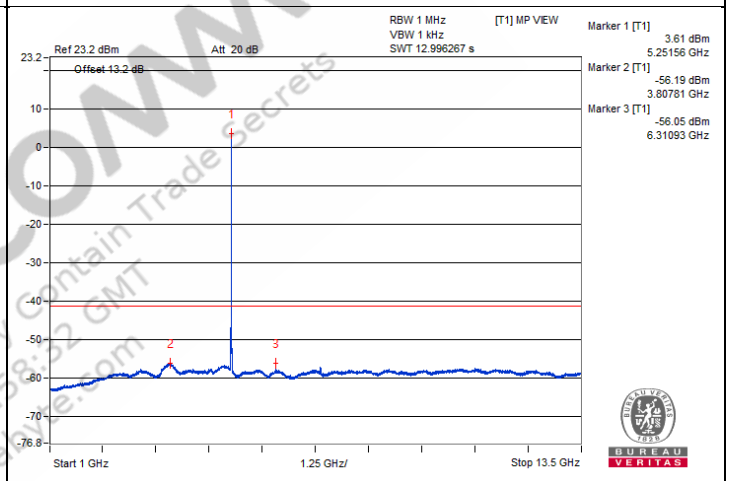

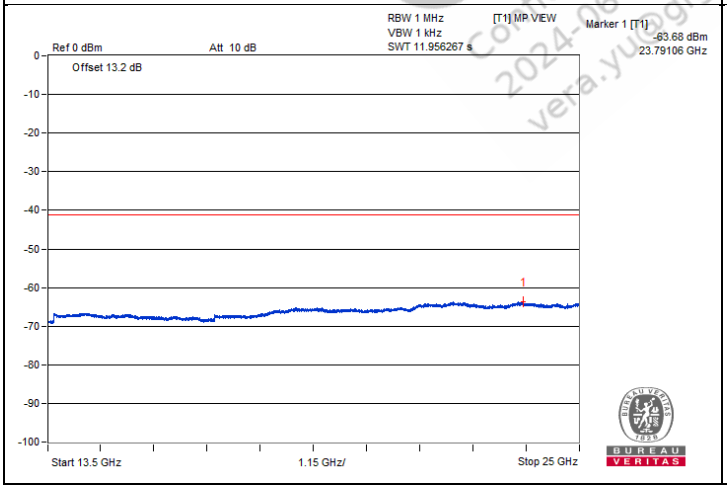

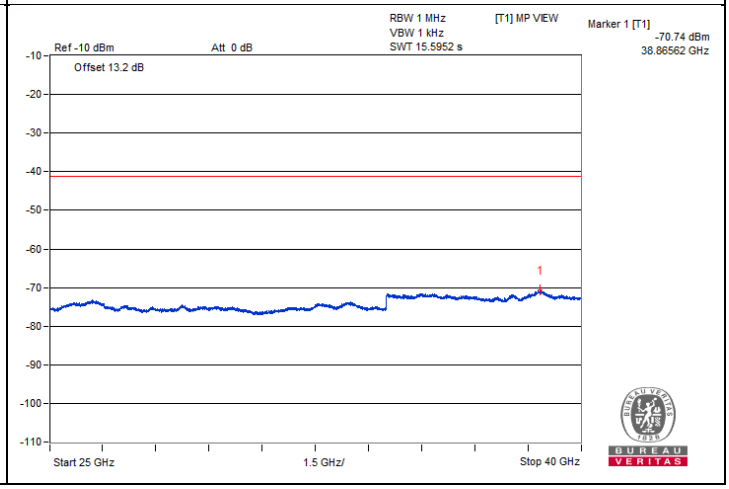

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalive.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5448.72	57.77 PK	74	-16.23	-47.06	-46.81	6.43	-37.49
2	5350.25	45.21 AV	54	-8.79	-59.44	-59.55	6.43	-50.05

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

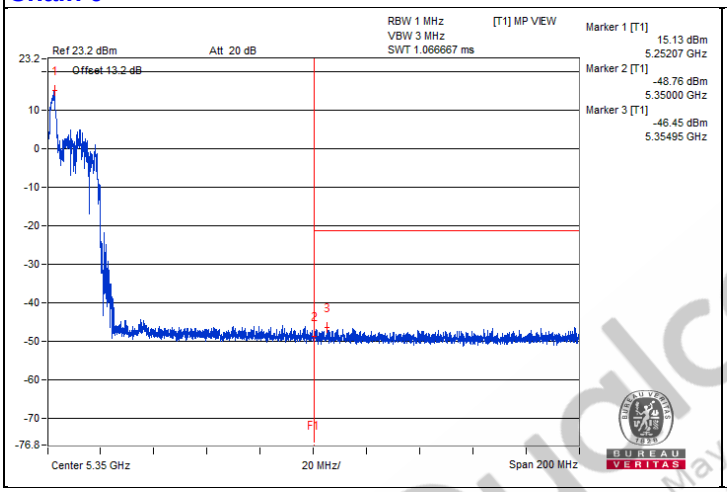

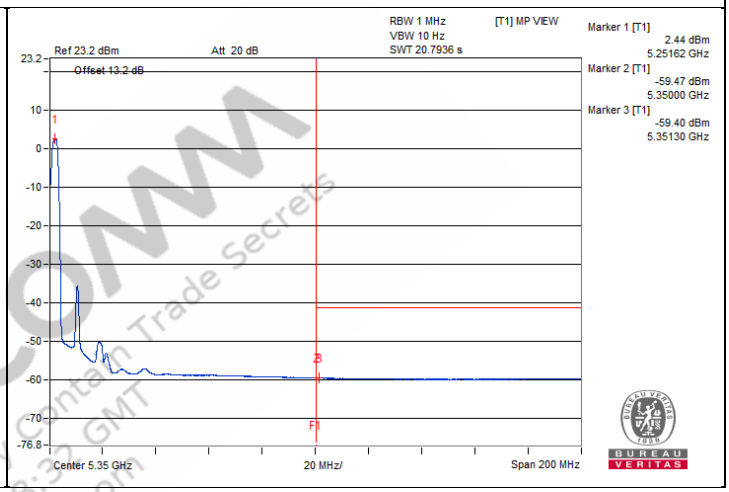

Chain 1

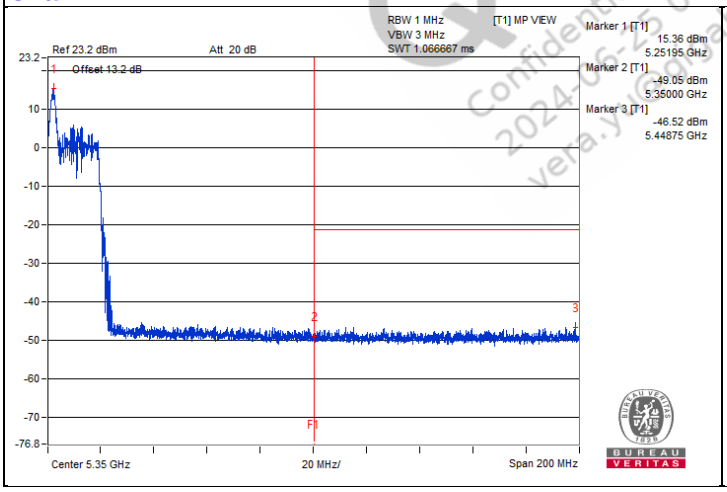

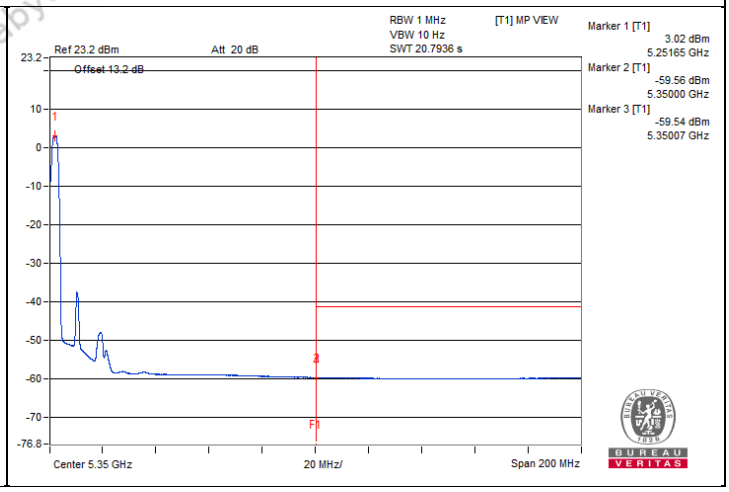

Qualcomm Confidential - May contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@cinsbyte.com

802.11be (EHT20) 26-tone RU - Channel 60

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3515.62	57.82 PK	74	-16.18	-47.79	-49.65	8.17	-37.44
2	3545.31	46.14 AV	54	-7.86	-60.36	-60.24	8.17	-49.12
3	#7056.25	59.54 PK	68.2	-8.66	-48.37	-45.81	8.17	-35.72
4	10609.37	60.85 PK	74	-13.15	-44.92	-46.38	8.17	-34.41
5	10603.12	49.55 AV	54	-4.45	-56.92	-56.86	8.17	-45.71
6	15903.5	54.86 PK	74	-19.14	-52.06	-51.15	8.17	-40.40
7	15894.87	42.96 AV	54	-11.04	-63.58	-63.38	8.17	-52.30


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

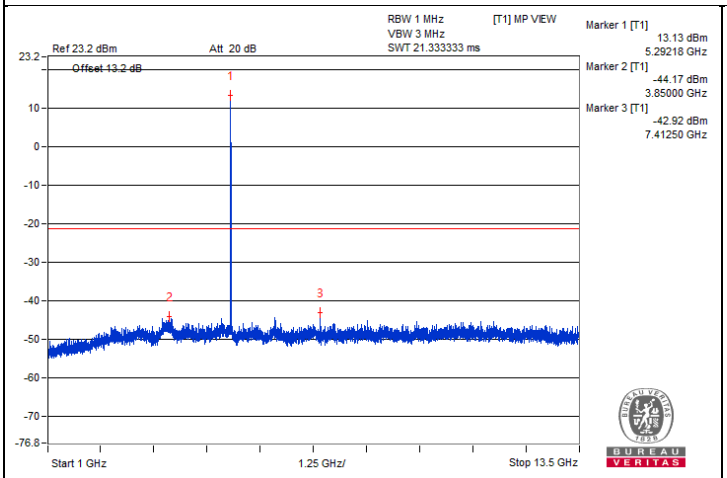


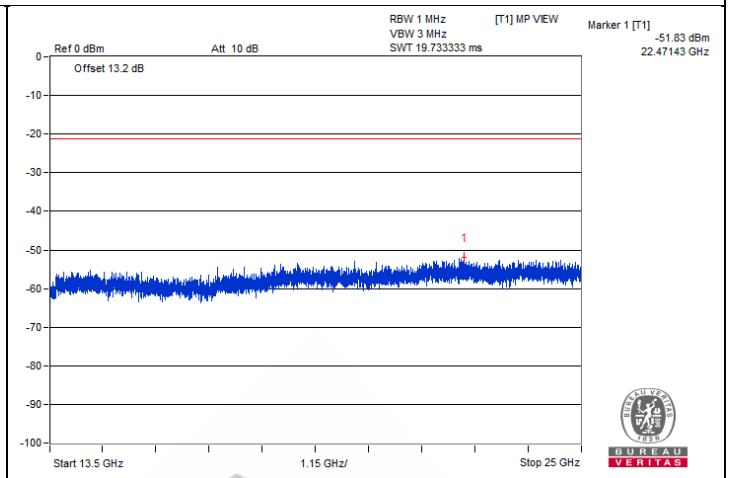

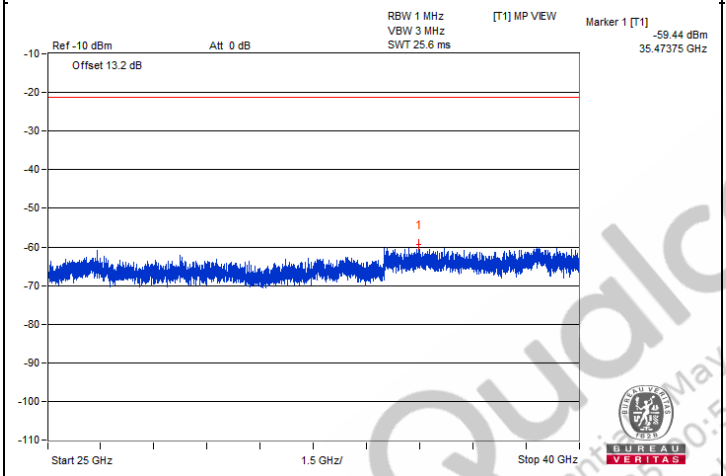

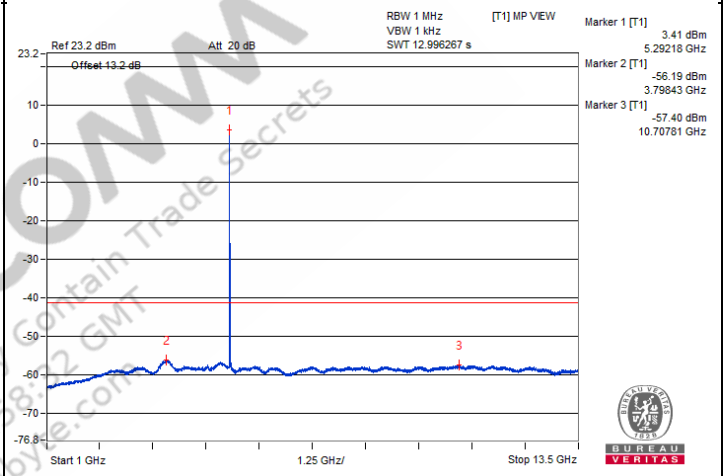


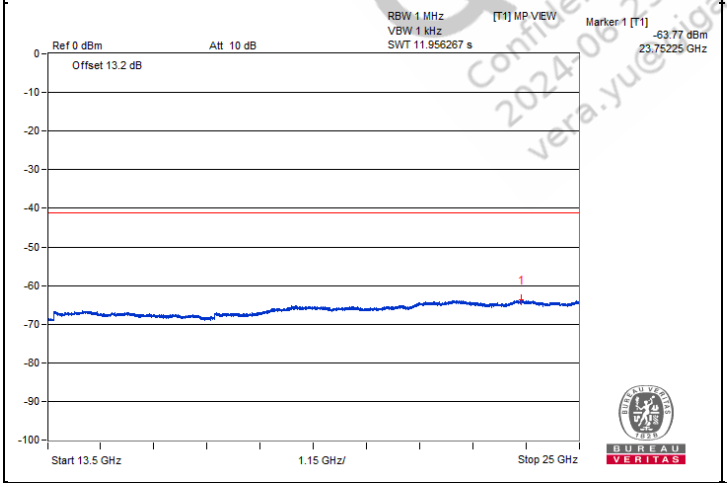


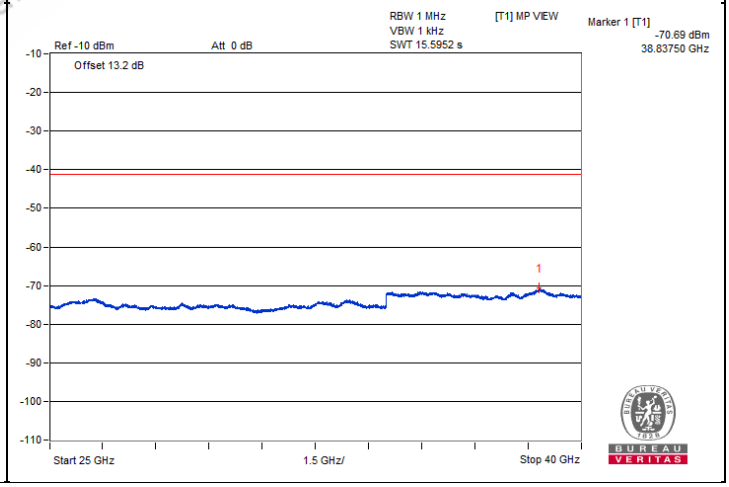



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gabyte.com


Chain 1

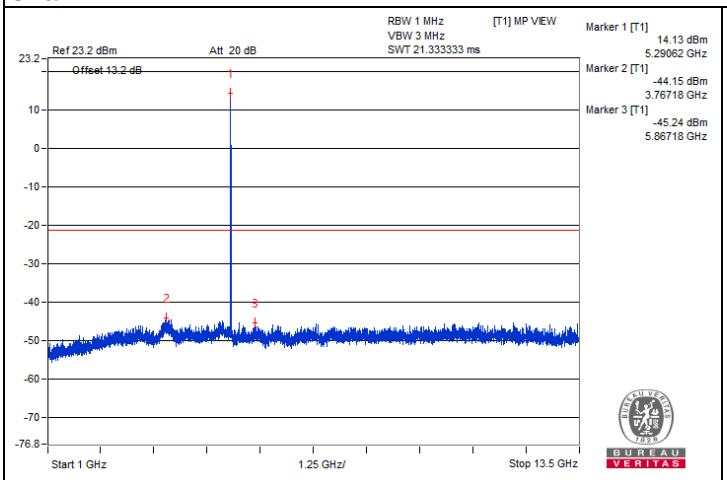


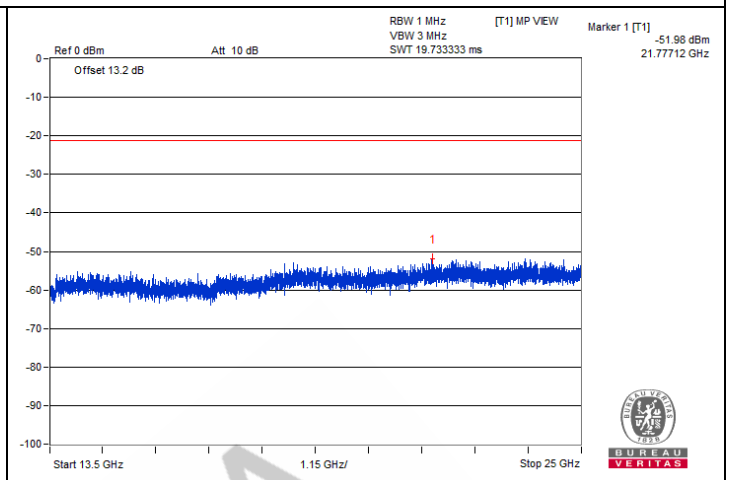

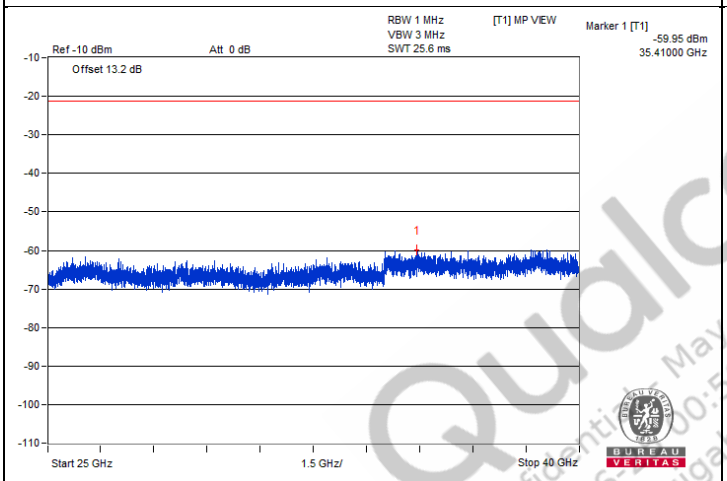

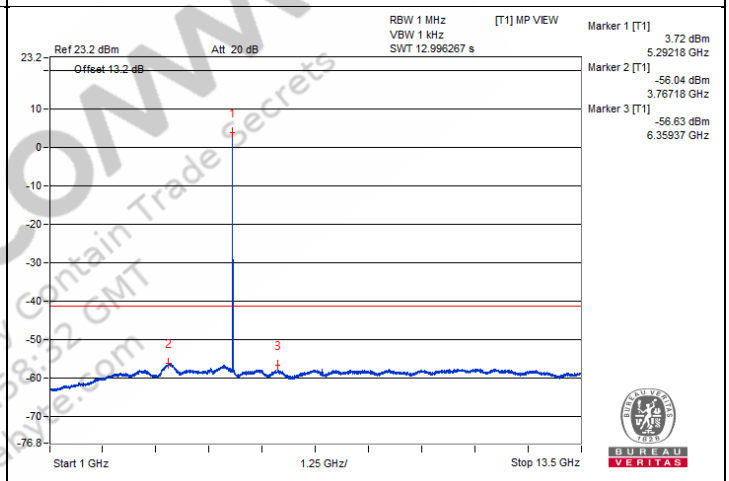

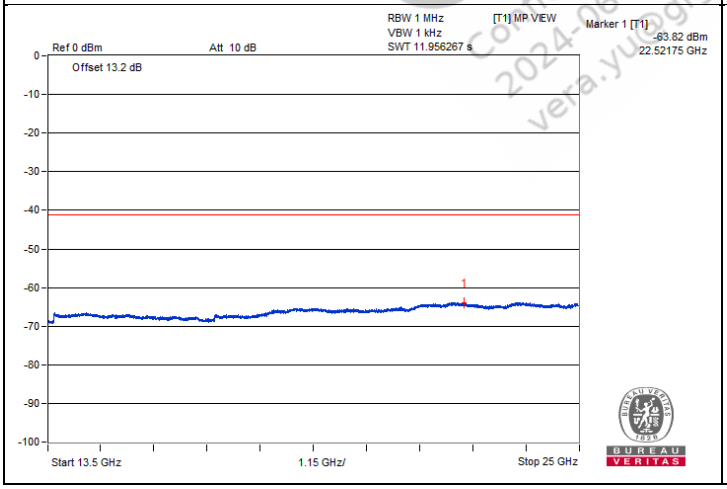

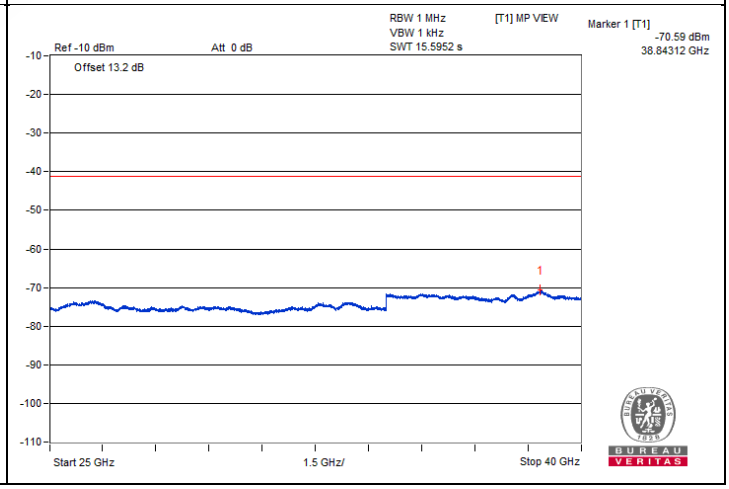

QualcOMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qgatvre.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5353.45	57.77 PK	74	-16.23	-45.34	-49.46	6.43	-37.49
2	5351.57	45.75 AV	54	-8.25	-58.83	-59.07	6.43	-49.51

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

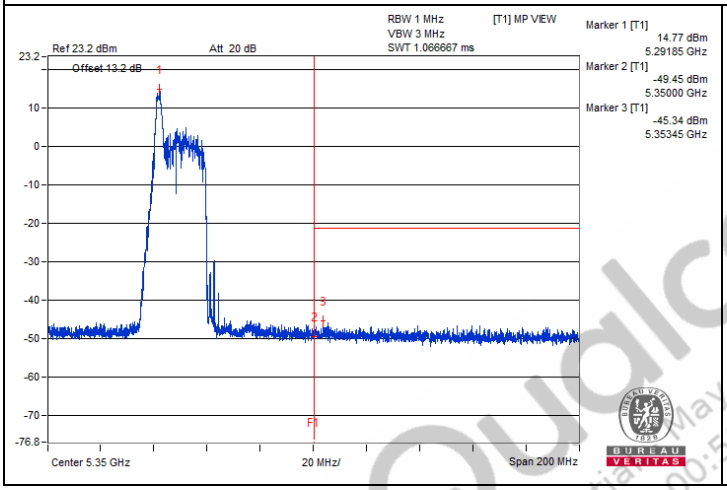

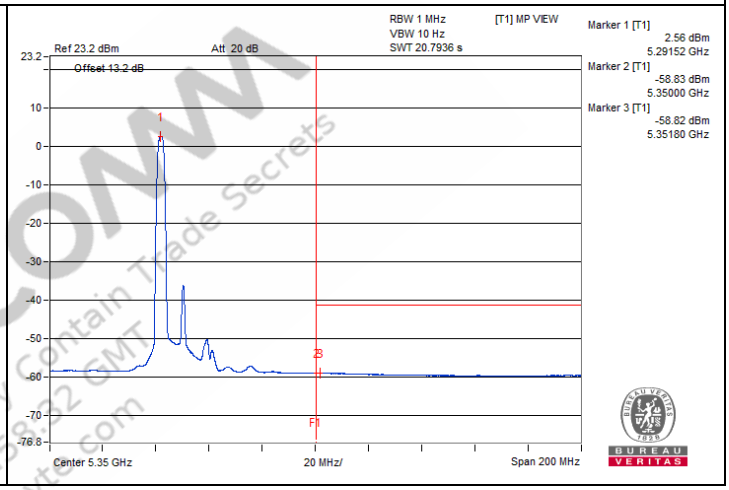

Chain 1

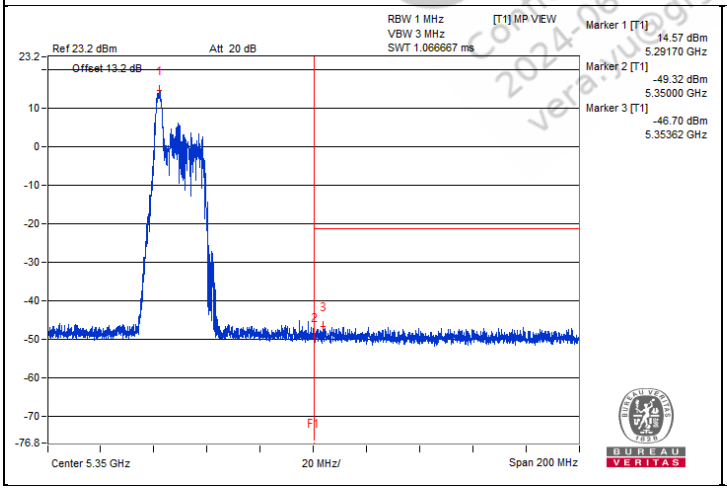

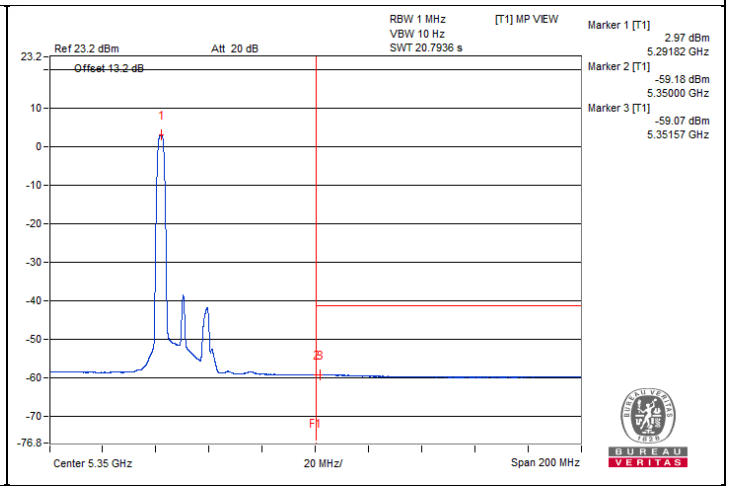

QualcOMM Confidential Plan Contain Trade Secrets 2024-06-25 00:52:32 GMT Verantriggabyte.com

802.11be (EHT20) 26-tone RU - Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3531.25	57.33 PK	74	-16.67	-48.7	-49.57	8.17	-37.93
2	3565.62	46.27 AV	54	-7.73	-60.08	-60.27	8.17	-48.99
3	#7101.56	60.03 PK	68.2	-8.17	-48.43	-45.03	8.17	-35.23
4	10640.62	60.36 PK	74	-13.64	-45.78	-46.4	8.17	-34.90
5	10620.31	49.57 AV	54	-4.43	-56.96	-56.78	8.17	-45.69
6	15949.5	52.63 PK	74	-21.37	-52.96	-54.87	8.17	-42.63
7	15962.43	41.9 AV	54	-12.1	-64.6	-64.48	8.17	-53.36


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

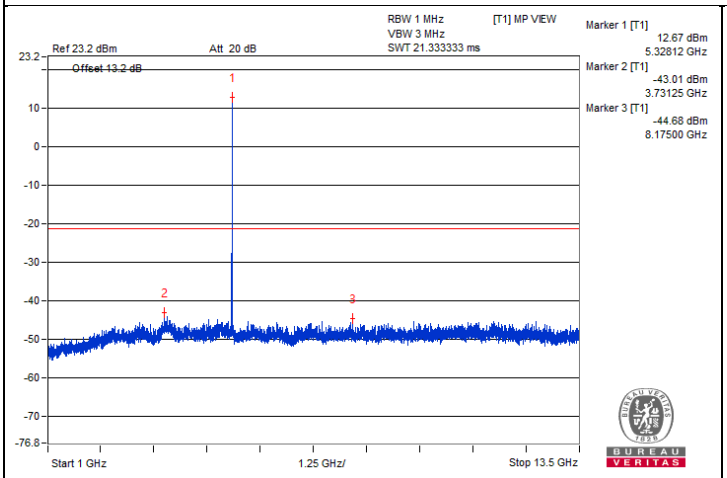


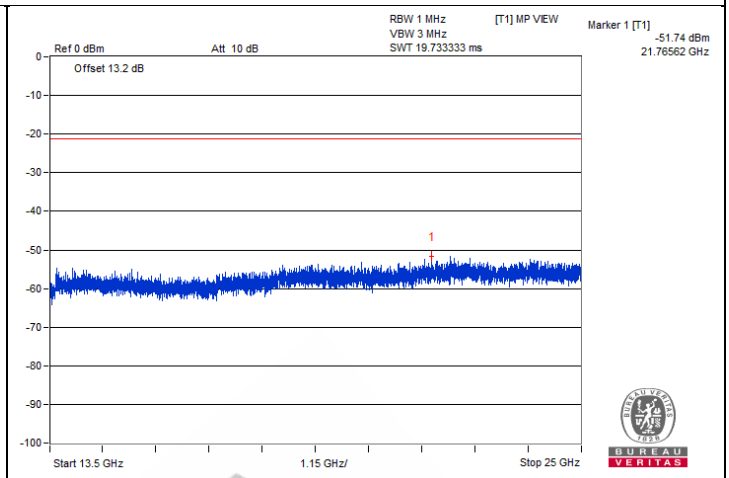

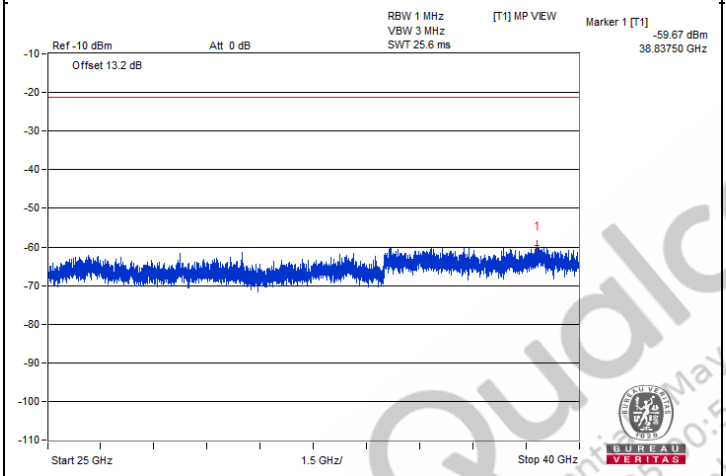

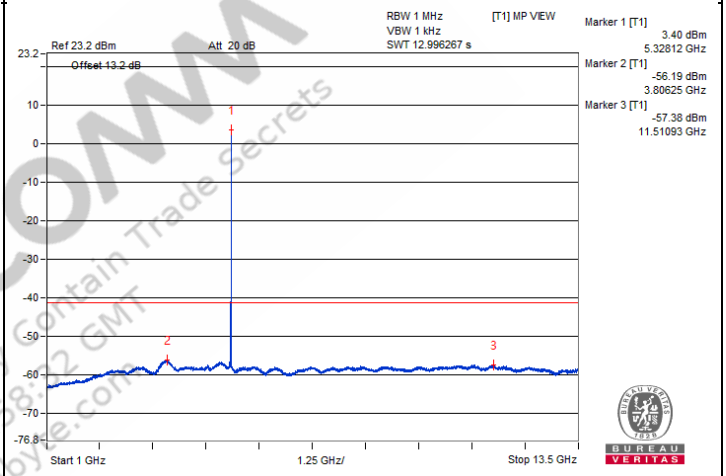


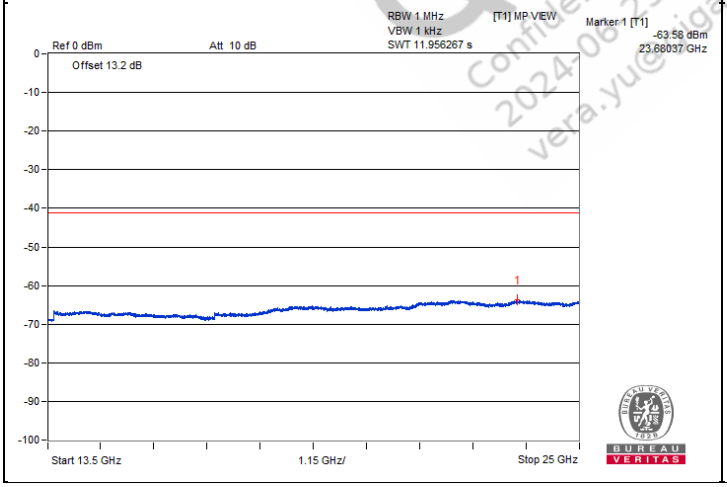


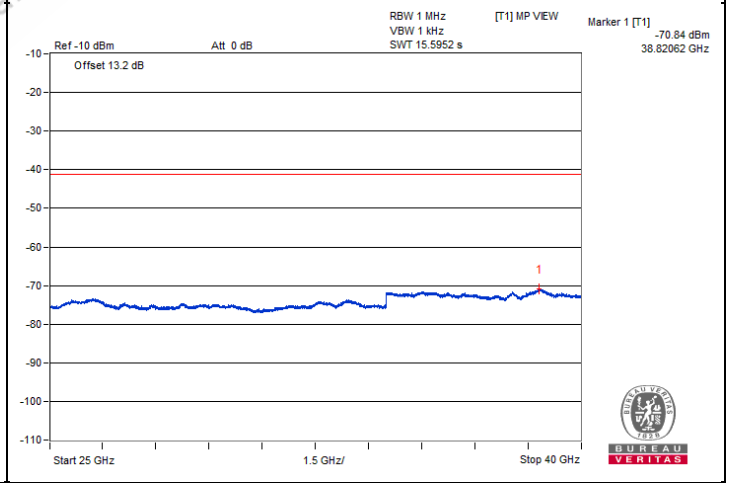



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

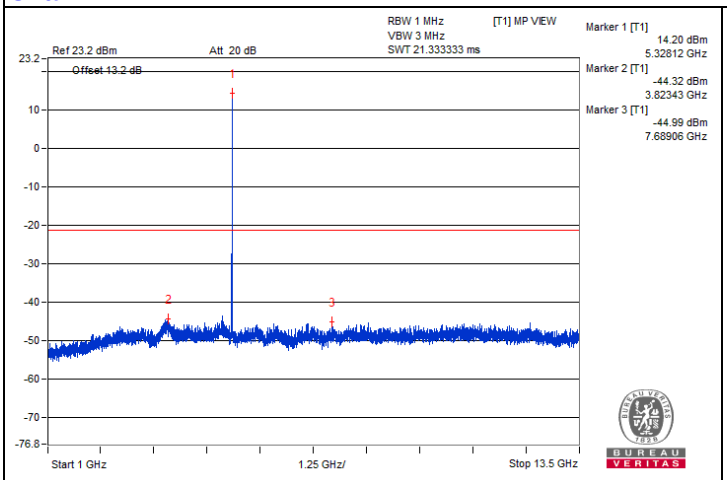


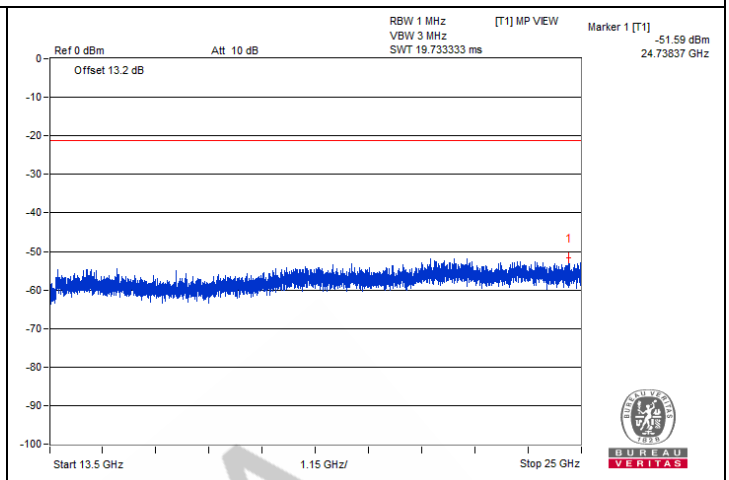

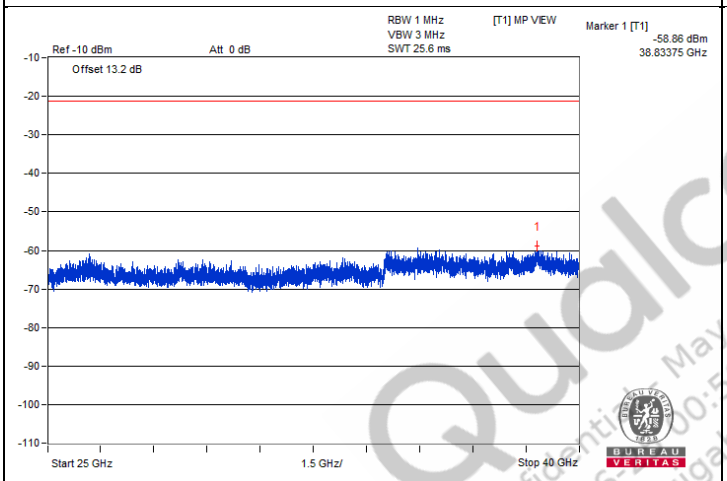

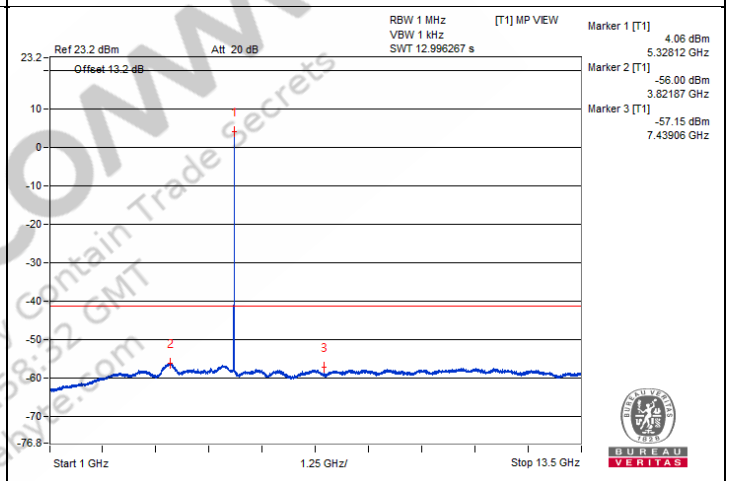

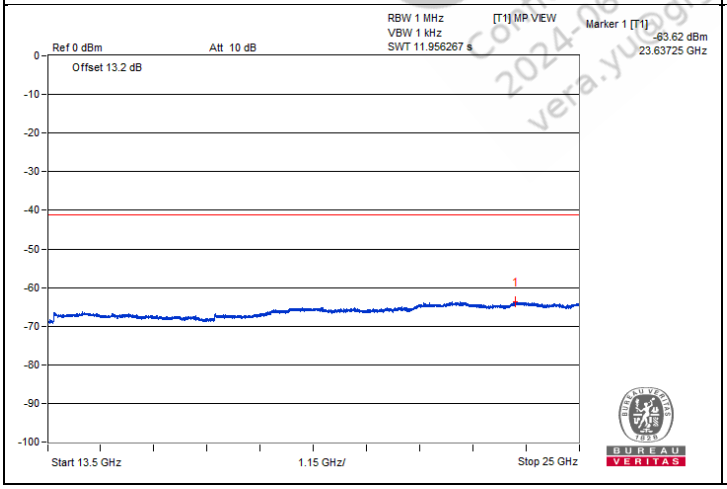

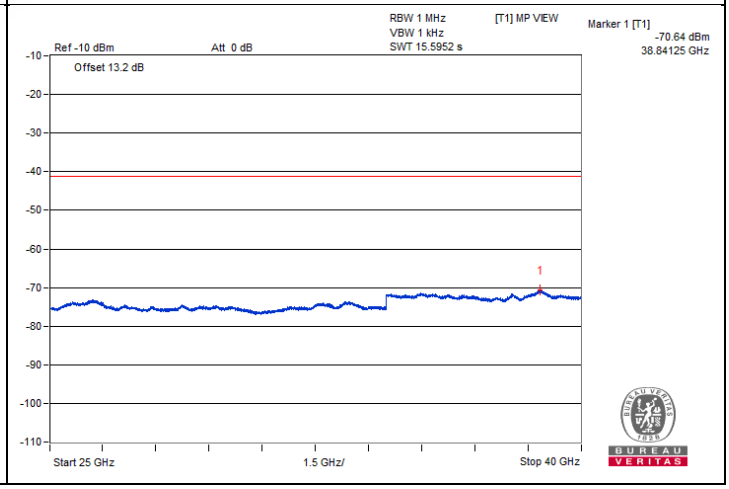

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qgatwire.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5401.5	58.57 PK	74	-15.43	-46.42	-45.85	6.43	-36.69
2	5353.67	46.01 AV	54	-7.99	-58.4	-59.01	6.43	-49.25

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

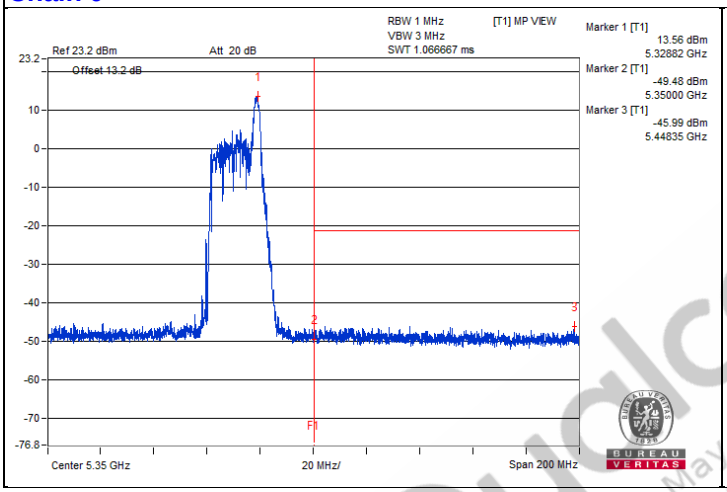

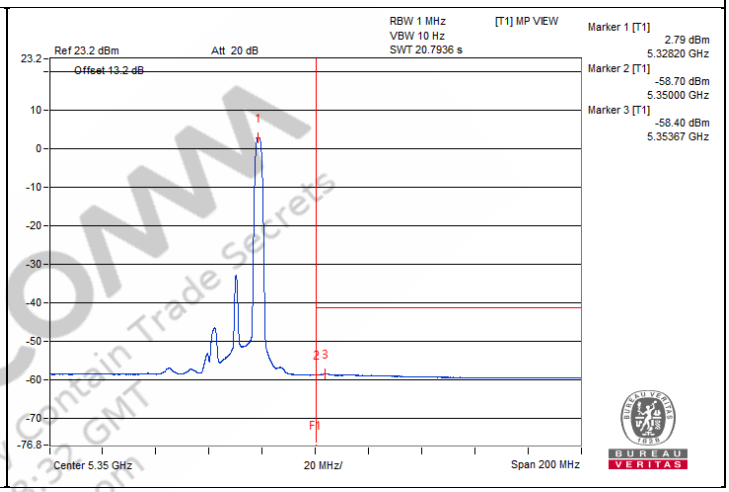

Chain 1

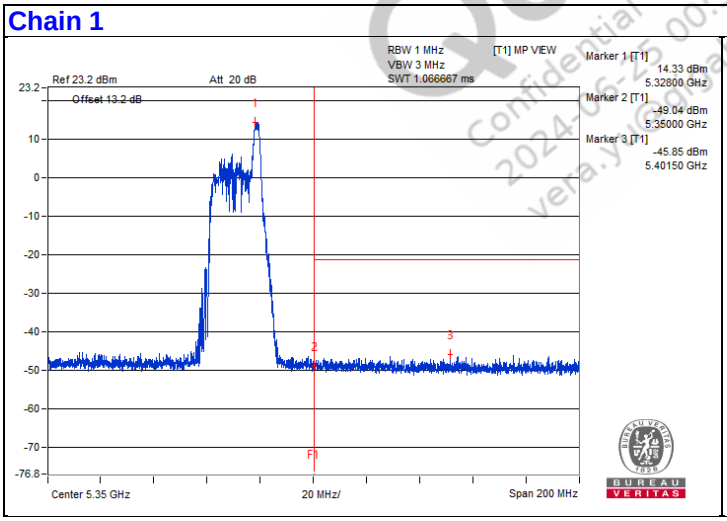

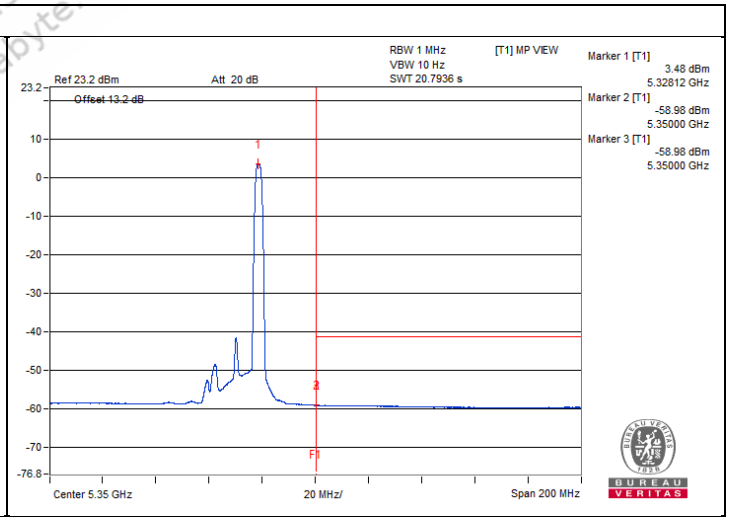

Qualcomm Confidential - May contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@cinterion.com

802.11be (EHT20) 26-tone RU - Channel 100

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3664.06	57.27 PK	74	-16.73	-49.79	-48.63	8.17	-37.99
2	3646.87	46.19 AV	54	-7.81	-60.21	-60.29	8.17	-49.07
3	7329.68	59.52 PK	74	-14.48	-45.85	-48.35	8.17	-35.74
4	7326.56	48.27 AV	54	-5.73	-57.89	-58.48	8.17	-46.99
5	11010.93	60.4 PK	74	-13.6	-45.08	-47.28	8.17	-34.86
6	11000	49.06 AV	54	-4.94	-57.1	-57.68	8.17	-46.20
7	#16513	54.64 PK	68.2	-13.56	-54.85	-50.03	8.17	-40.62


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

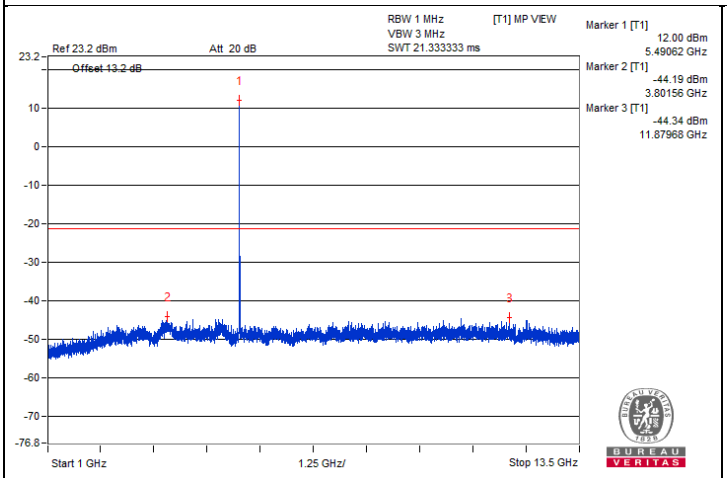


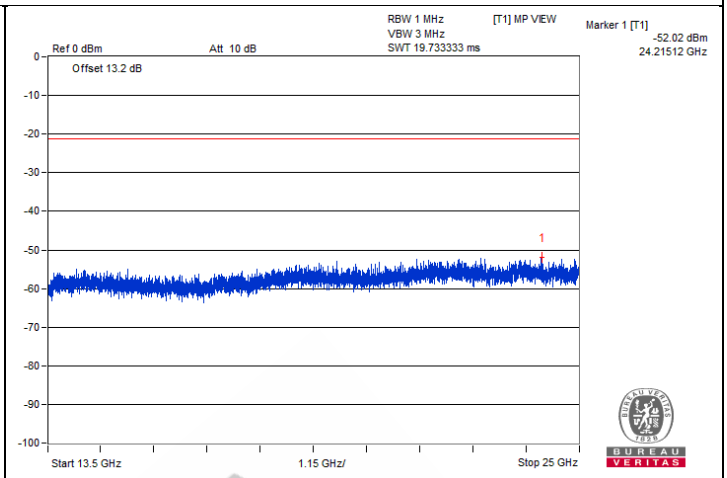

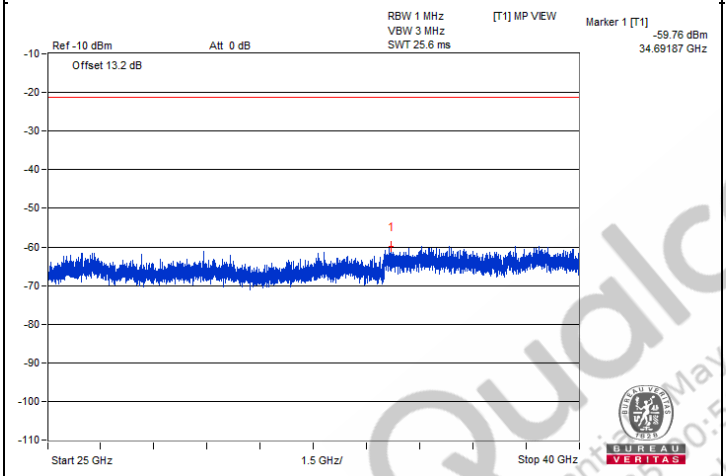

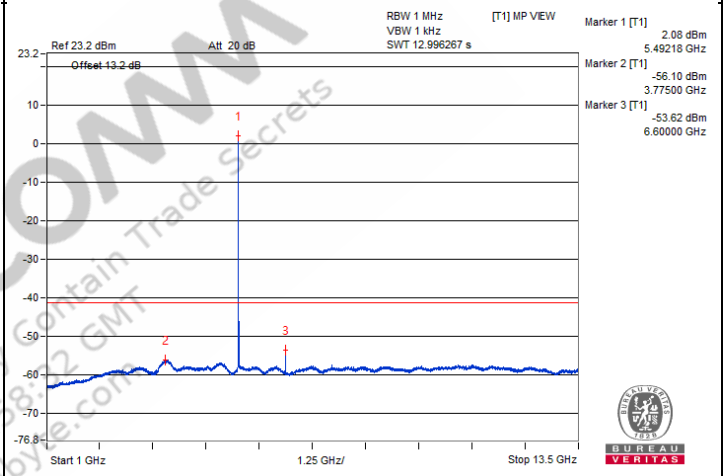


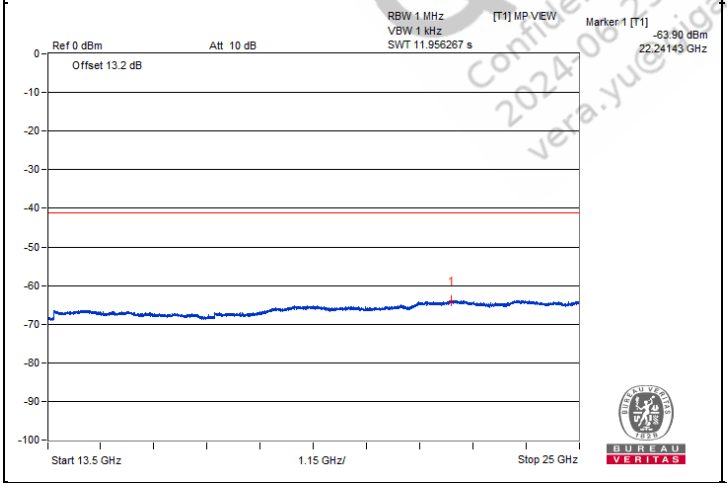


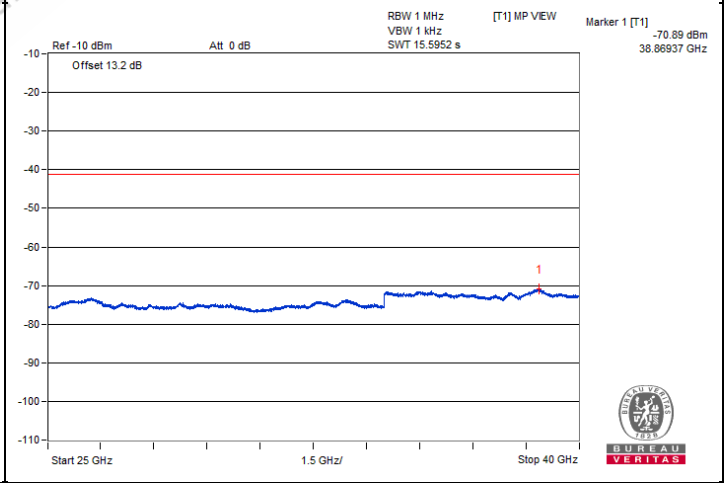



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

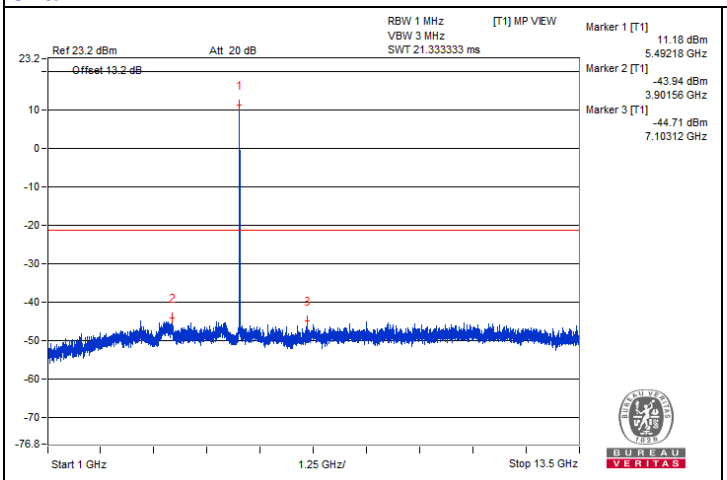


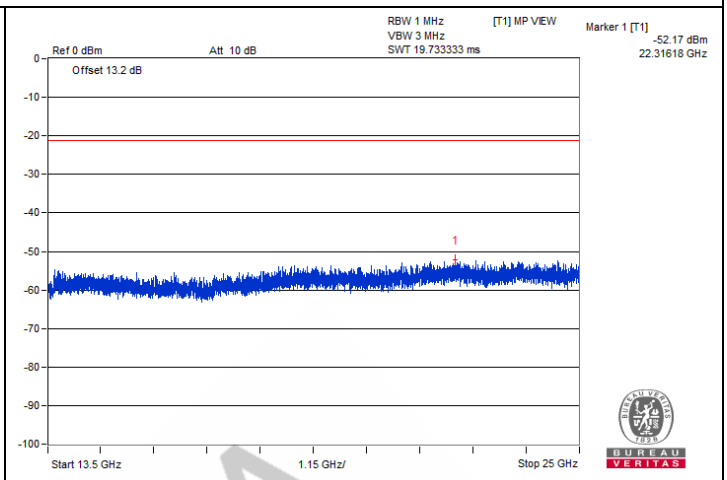

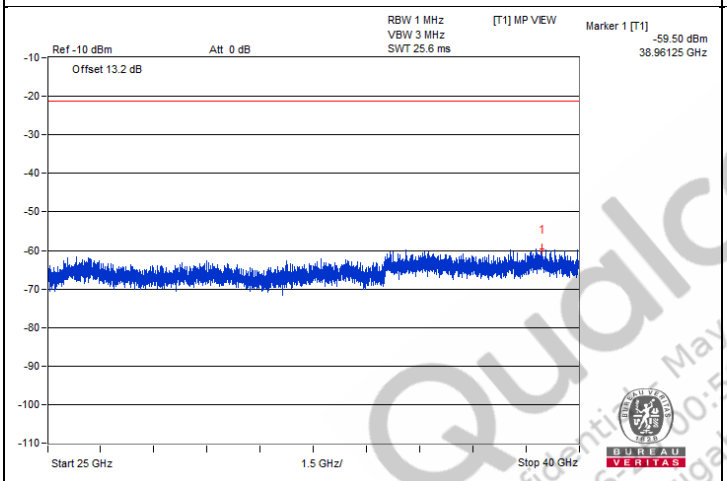

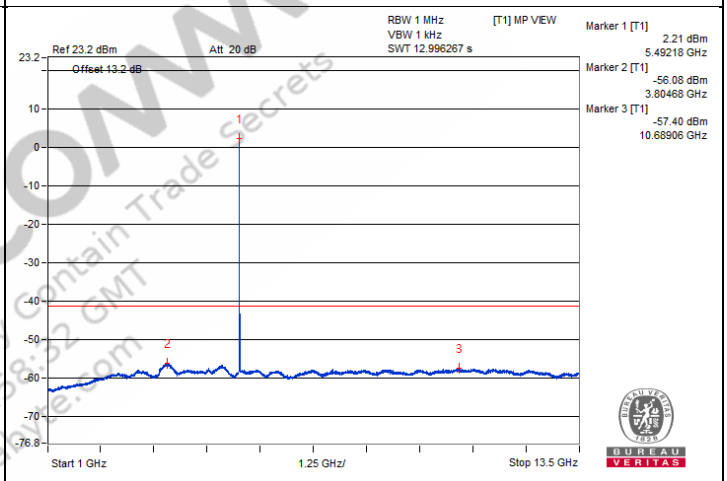

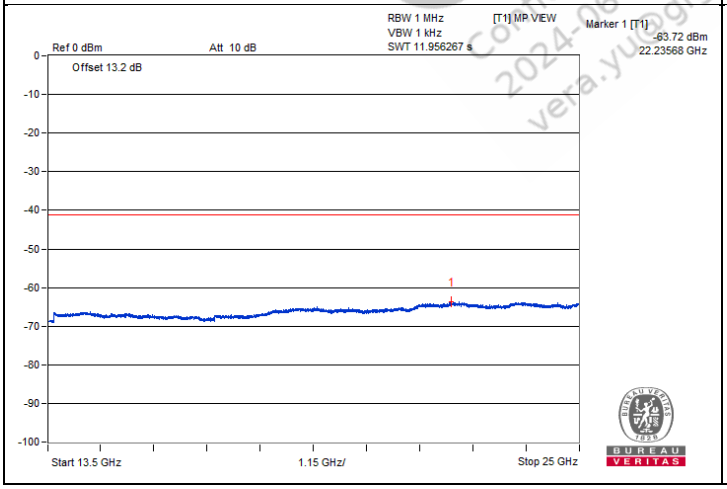

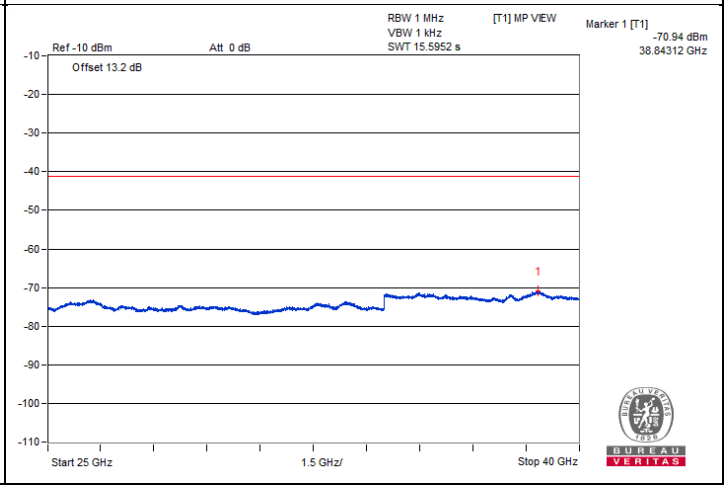

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5458	59.2 PK	74	-14.8	-46.82	-46.97	7.82	-36.06
2	5457.87	47.11 AV	54	-6.89	-59.04	-58.93	7.82	-48.15
3	#5464.87	59.72 PK	68.2	-8.48	-46.68	-46.08	7.82	-35.54

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

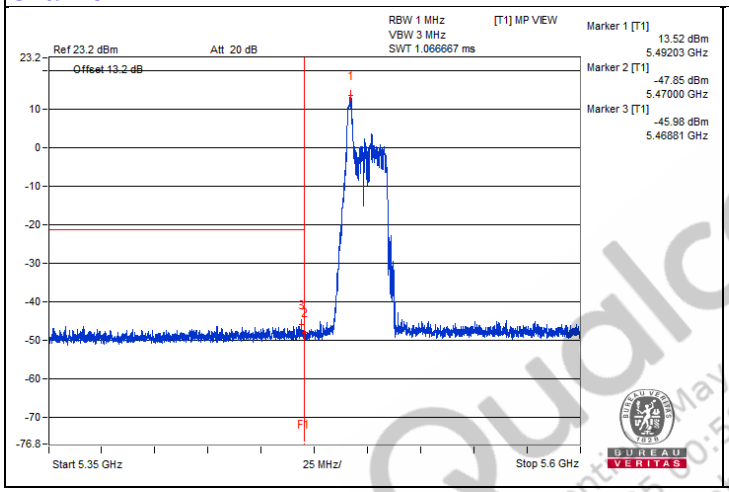

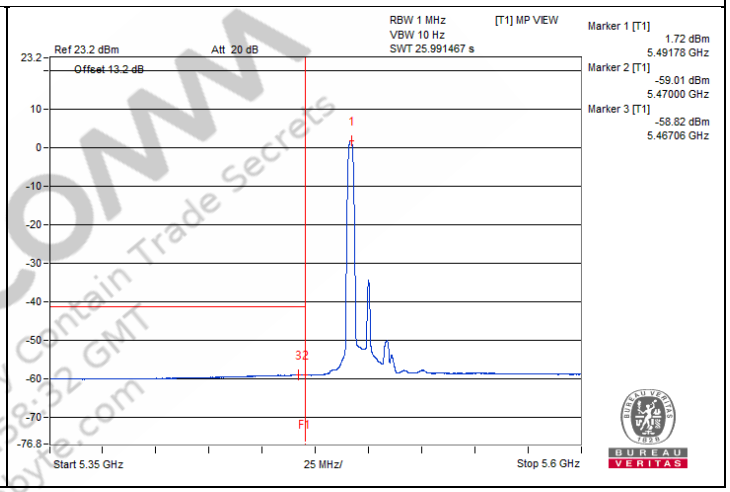

Chain 1

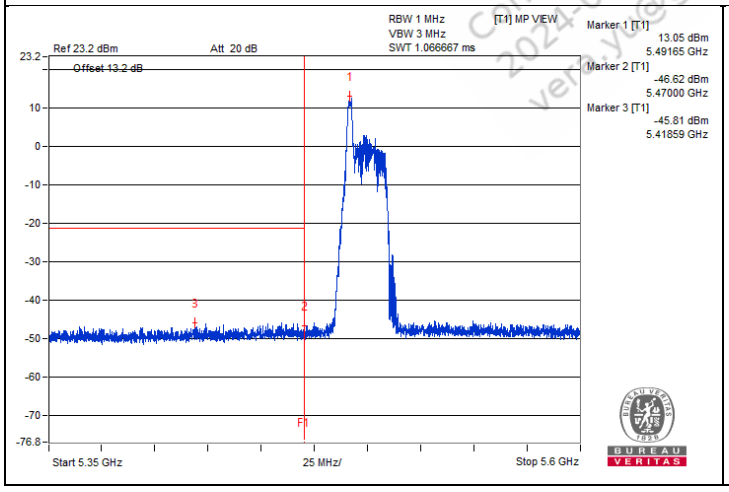

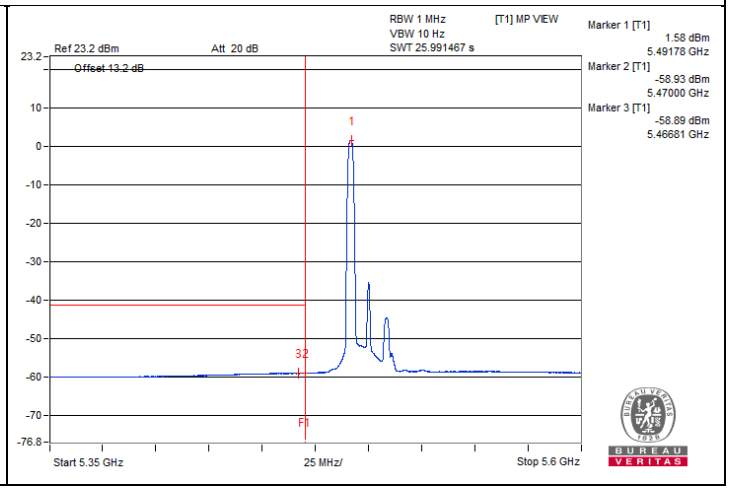

Qualcomm Confidential and May Contain Trade Secrets
2021-06-25 00:58:32 GMT
ven.yu@gigabyte.com

802.11be (EHT20) 26-tone RU - Channel 116

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3731.25	57.61 PK	74	-16.39	-48.35	-49.38	8.17	-37.65
2	3739.06	46.46 AV	54	-7.54	-59.82	-60.14	8.17	-48.80
3	7432.81	59.5 PK	74	-14.5	-47.43	-46.5	8.17	-35.76
4	7439.06	47.92 AV	54	-6.08	-58.41	-58.64	8.17	-47.34
5	11164.06	61.73 PK	74	-12.27	-45.08	-44.37	8.17	-33.53
6	11154.68	49.69 AV	54	-4.31	-56.67	-56.84	8.17	-45.57
7	#16735.81	53.91 PK	68.2	-14.29	-52.15	-52.95	8.17	-41.35


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

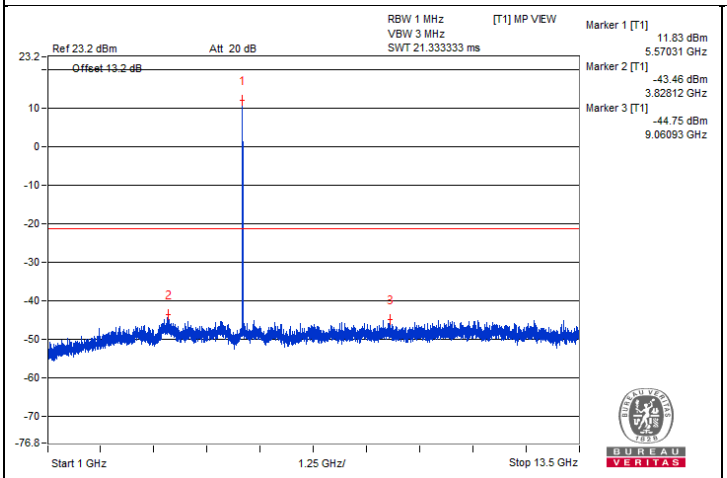


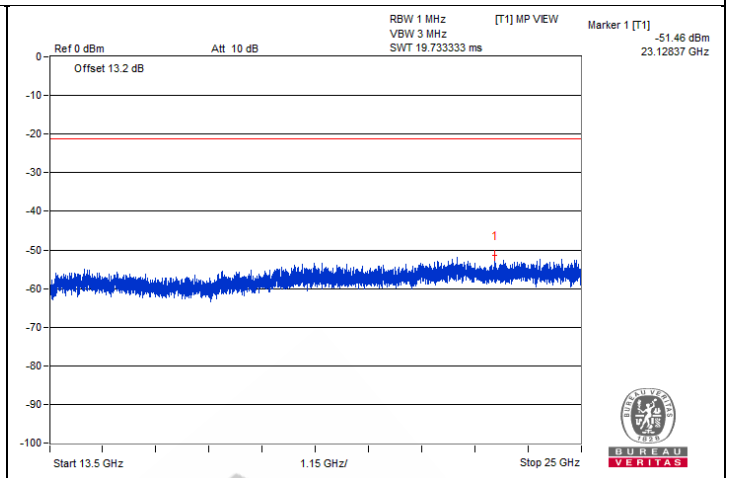

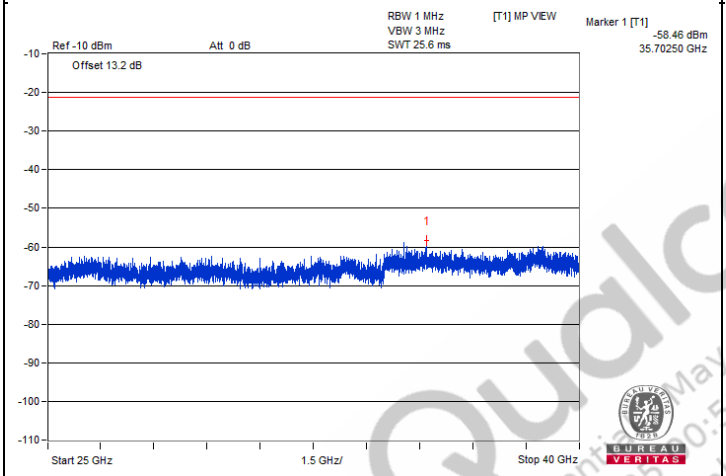

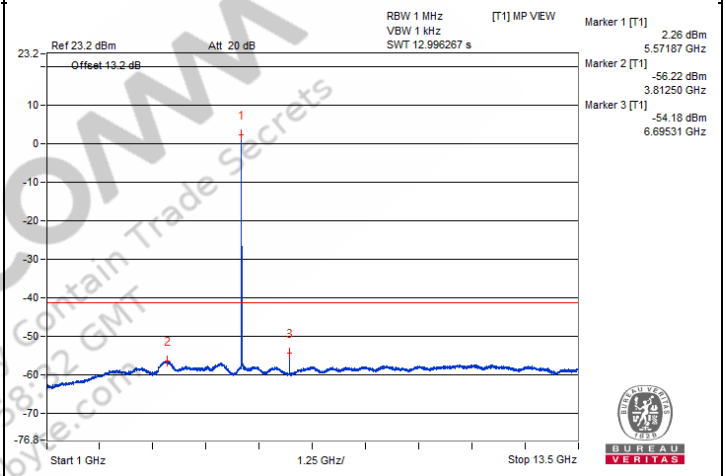


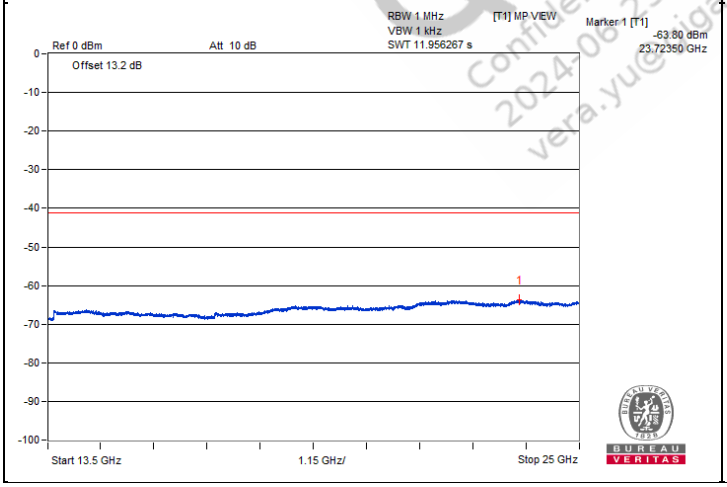


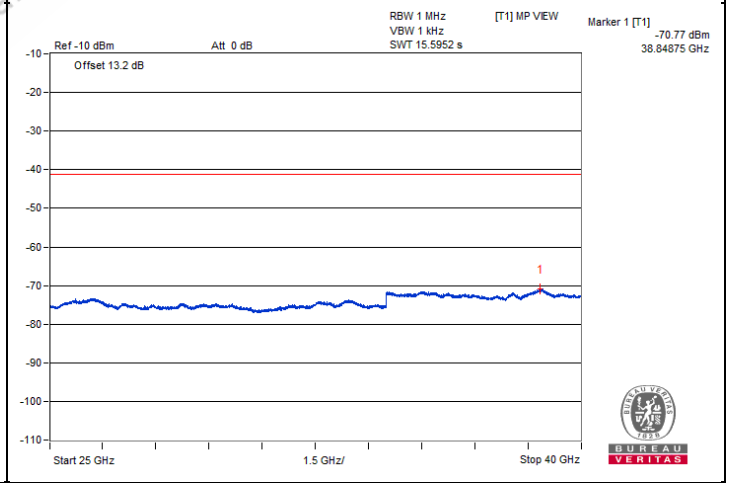



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

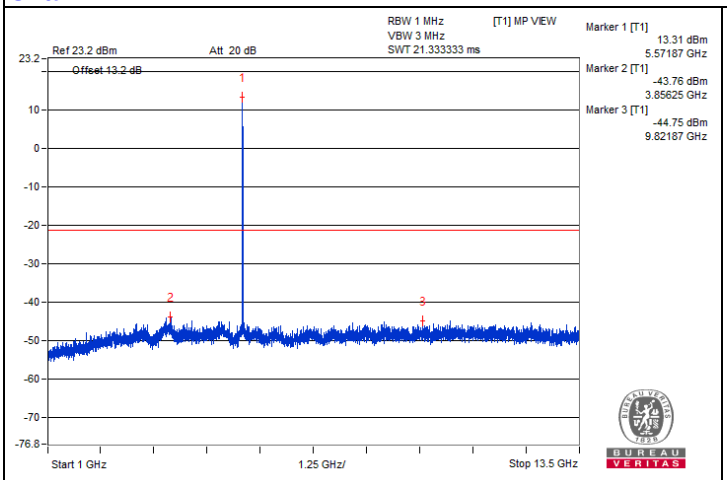


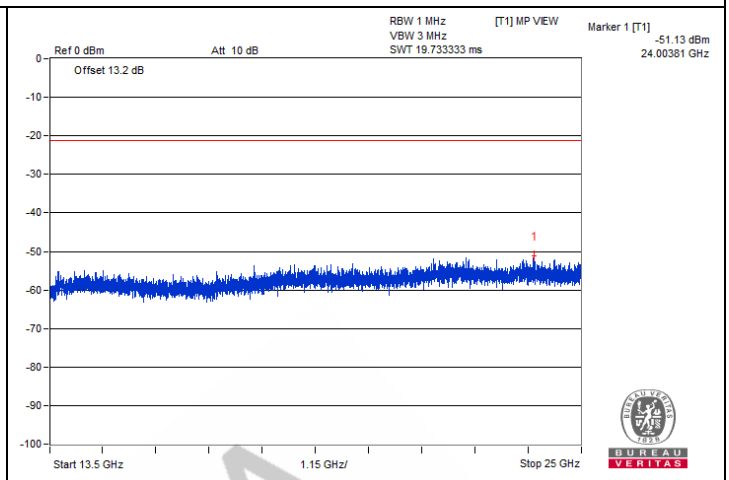

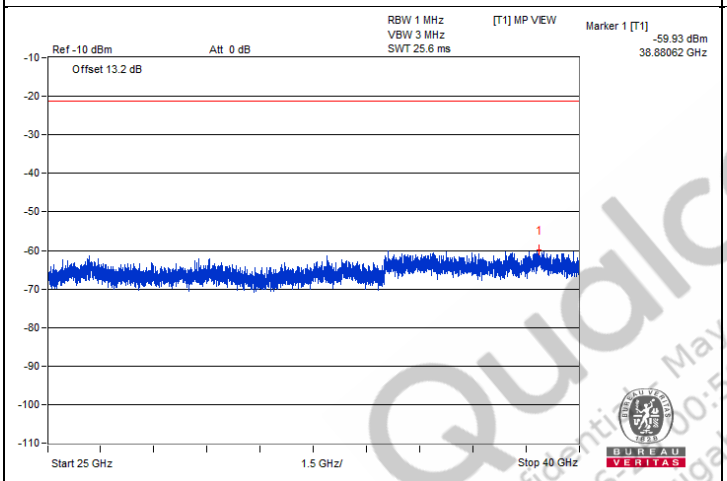

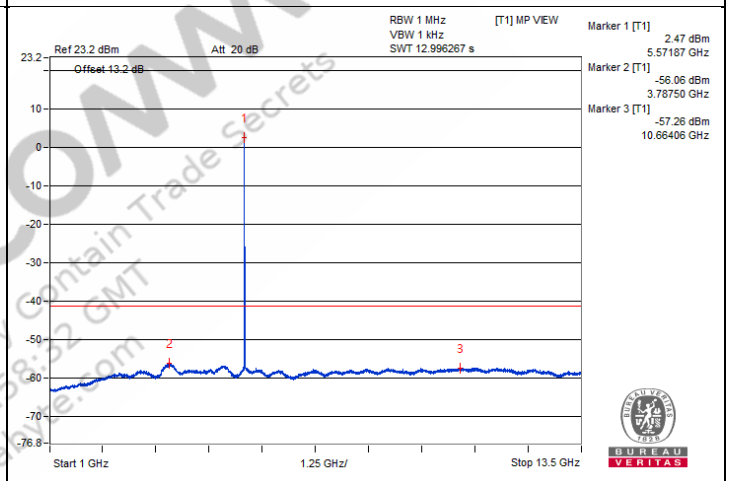

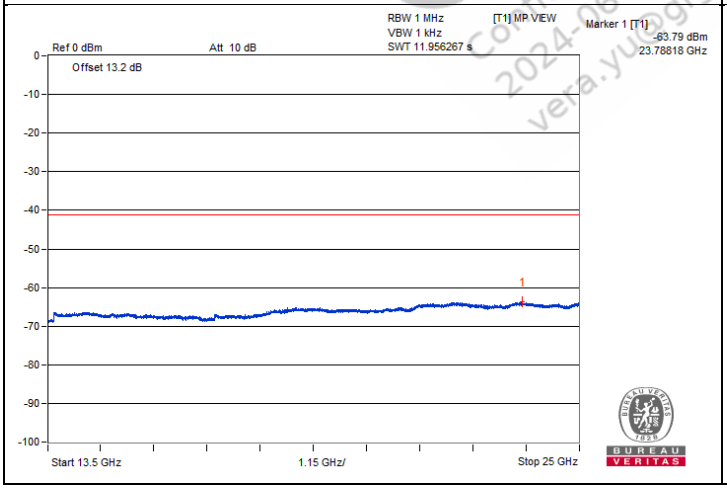

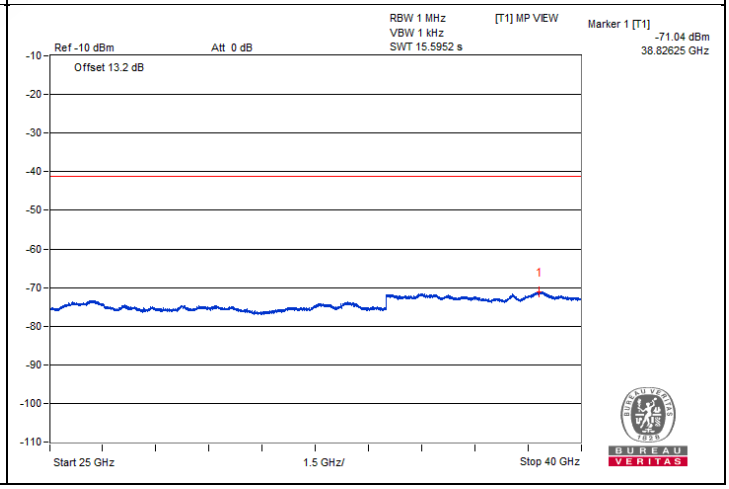

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5448.4	58.73 PK	74	-15.27	-47.28	-47.45	7.82	-36.53
2	5459.93	46.68 AV	54	-7.32	-59.52	-59.31	7.82	-48.58
3	#5462.37	59.09 PK	68.2	-9.11	-46	-48.31	7.82	-36.17

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

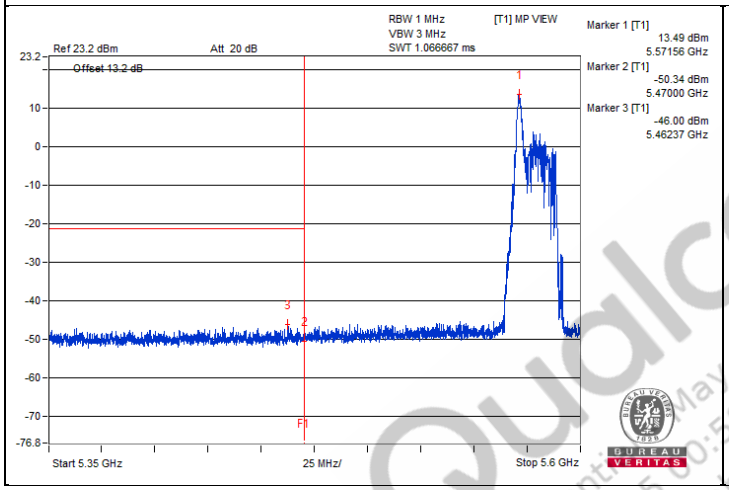

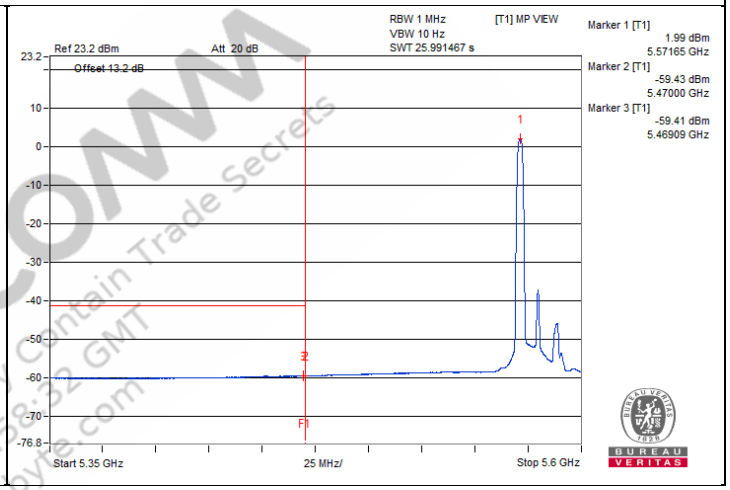

Chain 1

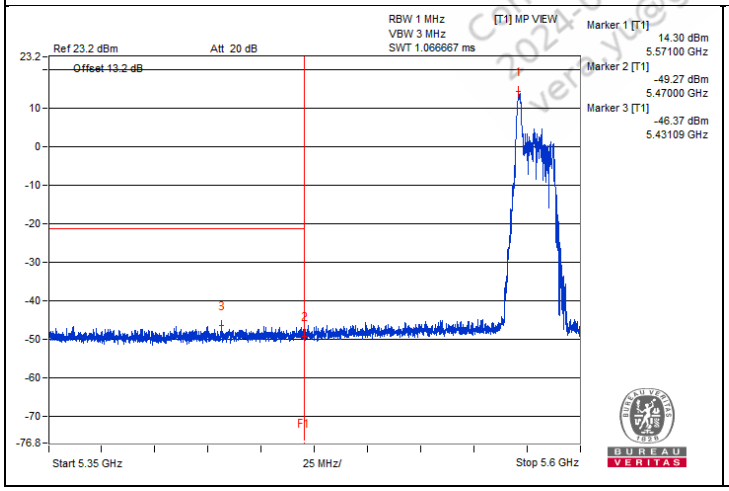

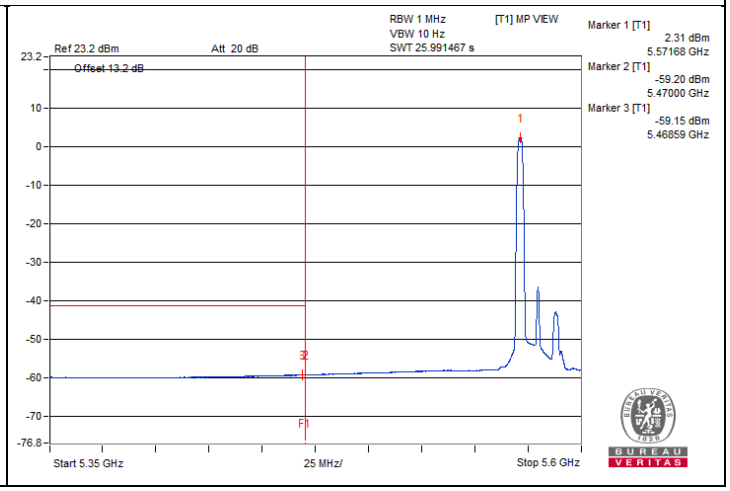

Qualcomm Confidential and May Contain Trade Secrets
2024-06-25 00:58:32 GMT
Vern Yu@gigabyte.com

802.11be (EHT20) 26-tone RU - Channel 140

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3790.62	58.17 PK	74	-15.83	-47.94	-48.62	8.17	-37.09
2	3804.68	46.64 AV	54	-7.36	-59.42	-60.22	8.17	-48.62
3	7614.06	59.39 PK	74	-14.61	-47.66	-46.51	8.17	-35.87
4	7614.06	48.23 AV	54	-5.77	-57.9	-58.55	8.17	-47.03
5	11409.37	60.99 PK	74	-13.01	-46.01	-44.95	8.17	-34.27
6	11385.93	49.6 AV	54	-4.4	-56.64	-57.04	8.17	-45.66
7	#17085.12	53.11 PK	68.2	-15.09	-53.16	-53.5	8.17	-42.15


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

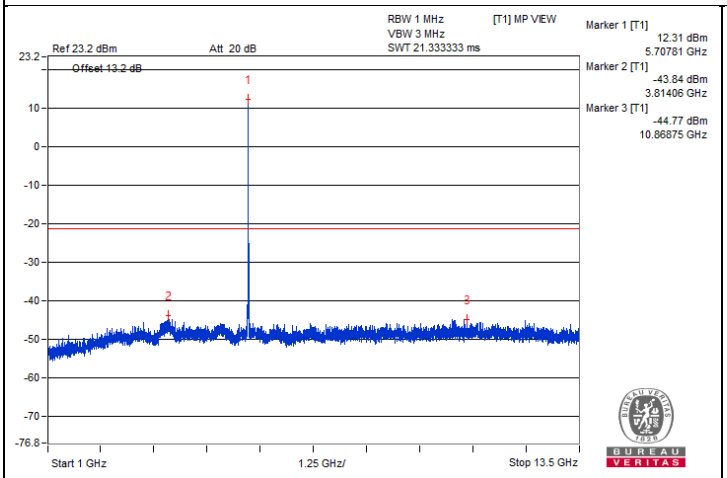


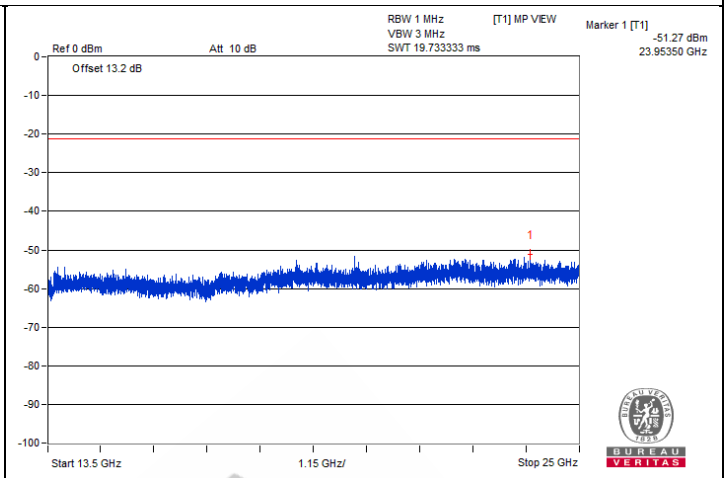

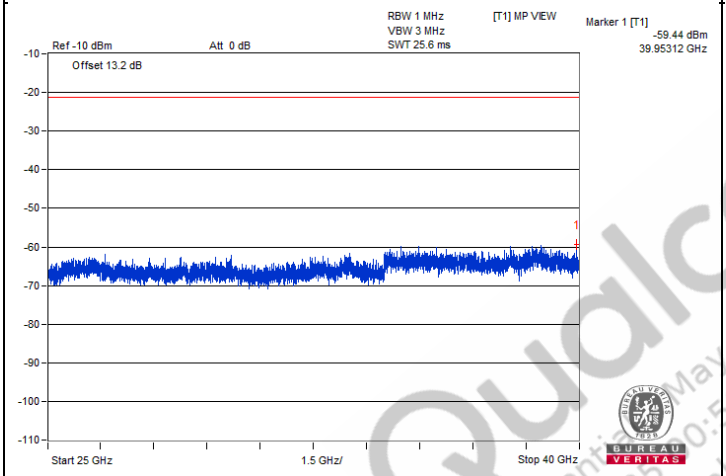

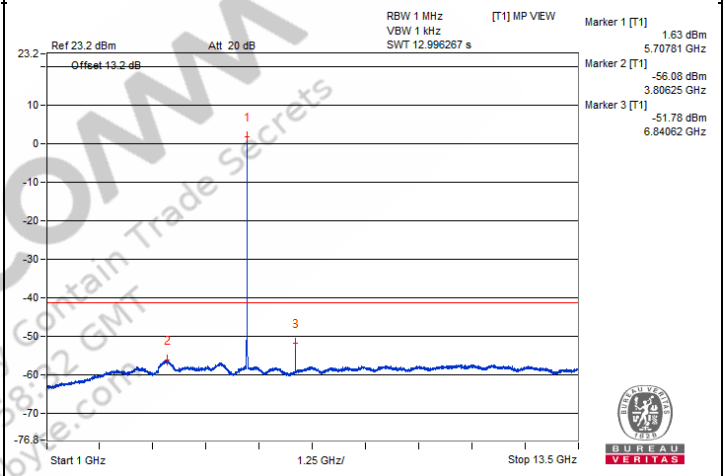


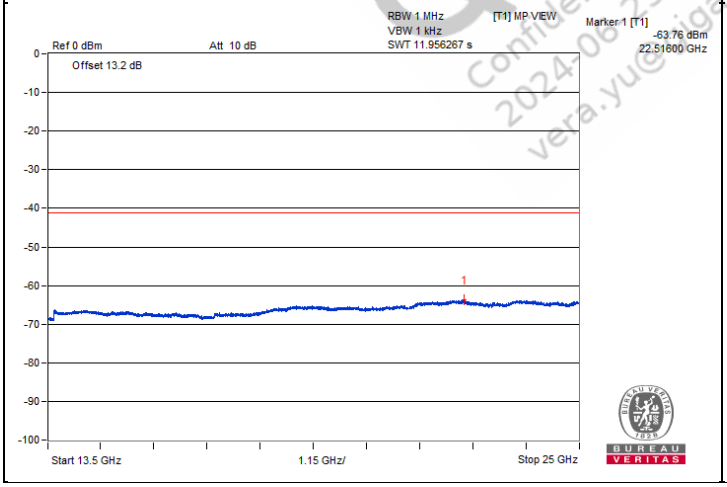


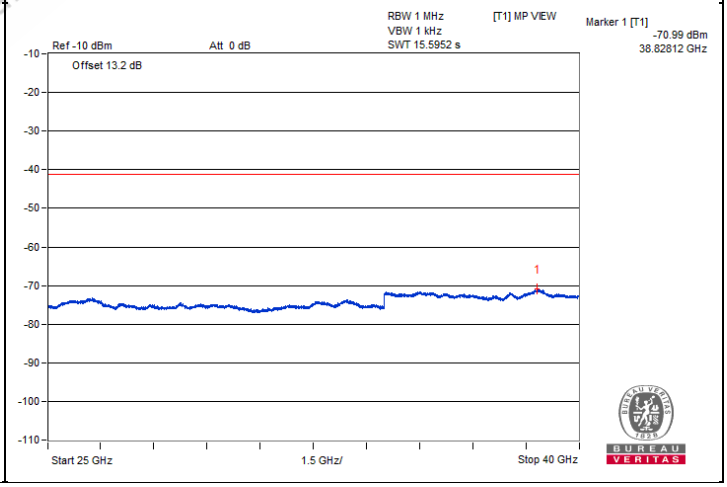



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

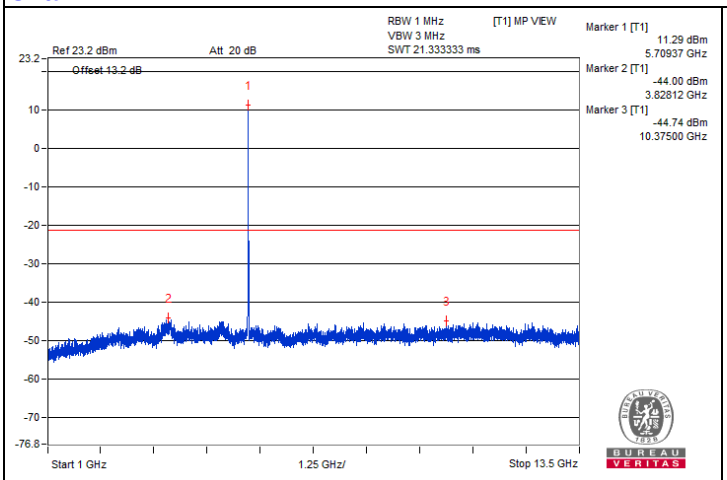


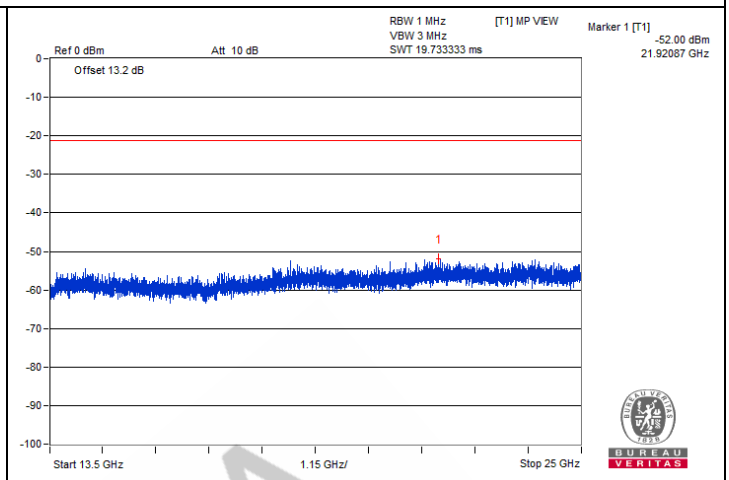

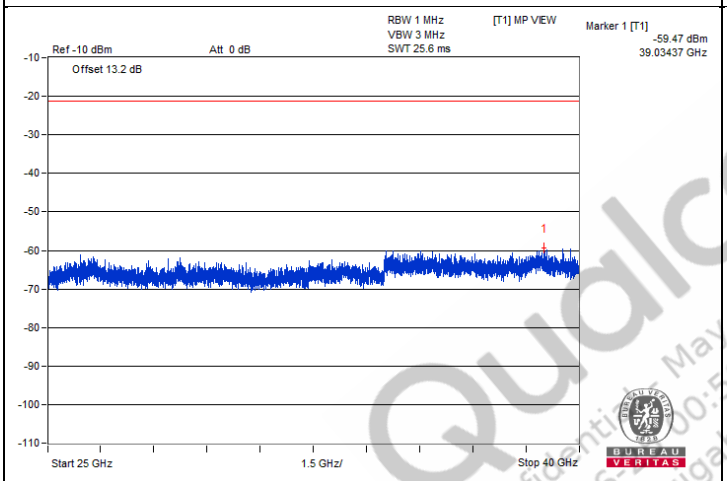

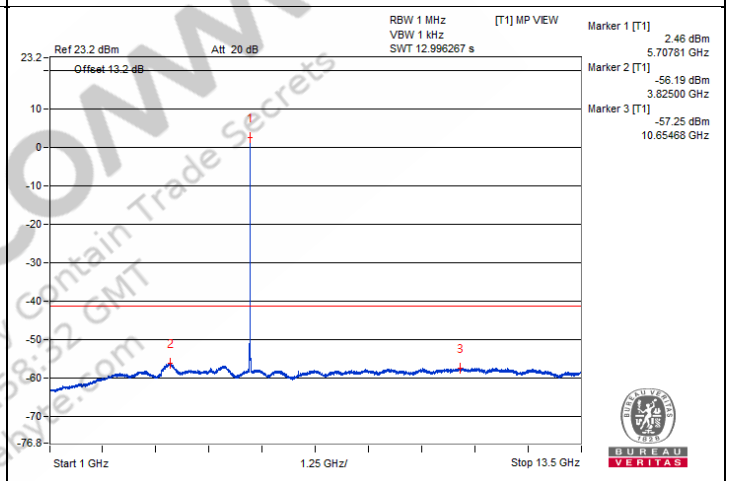

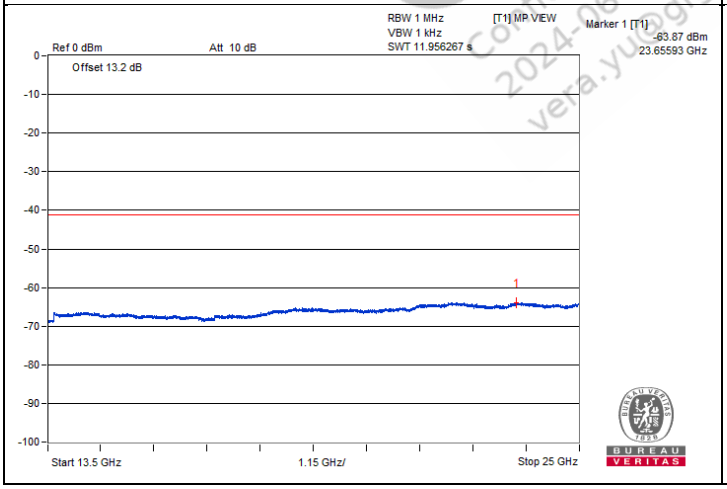

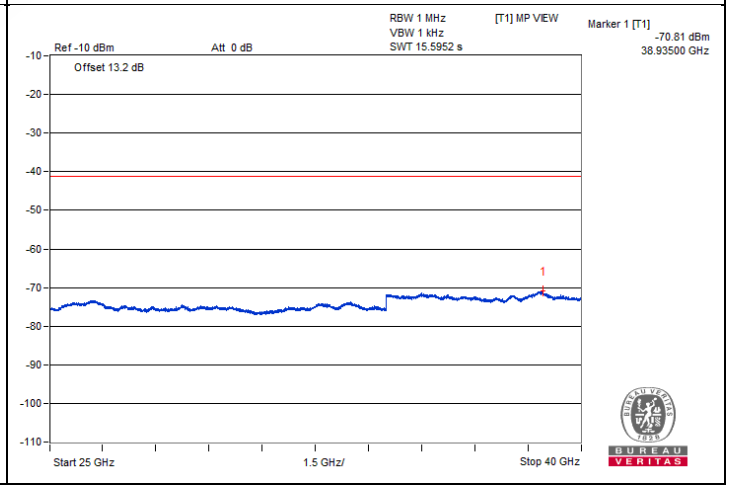

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5753.85	60.24 PK	68.2	-7.96	-46.07	-45.65	7.82	-35.02

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

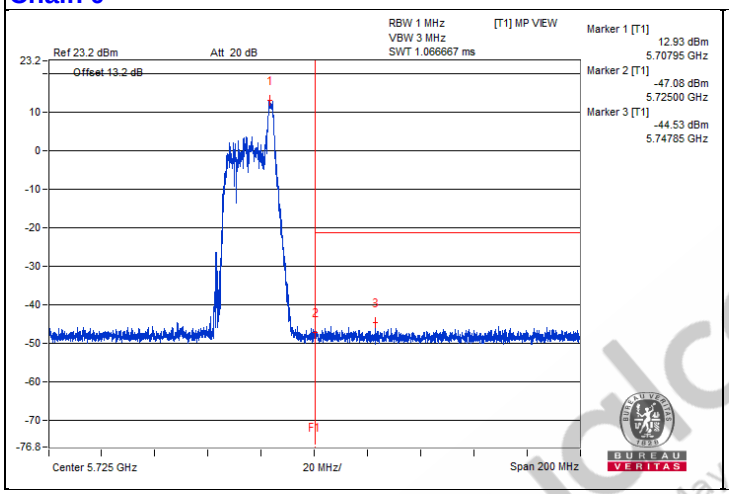

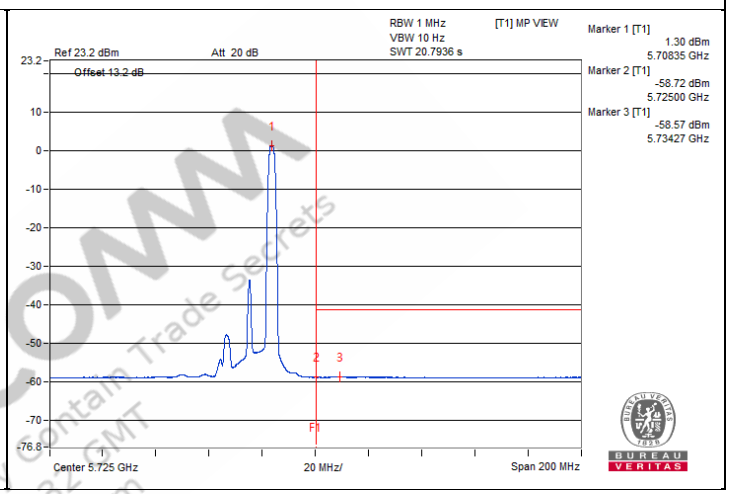

Chain 1

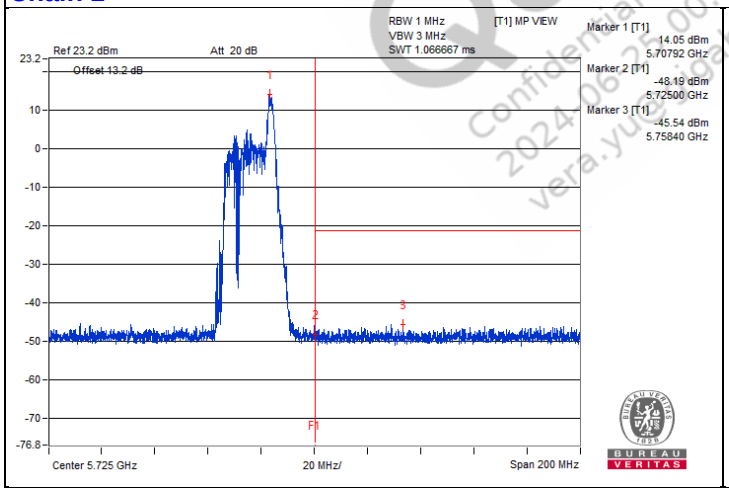

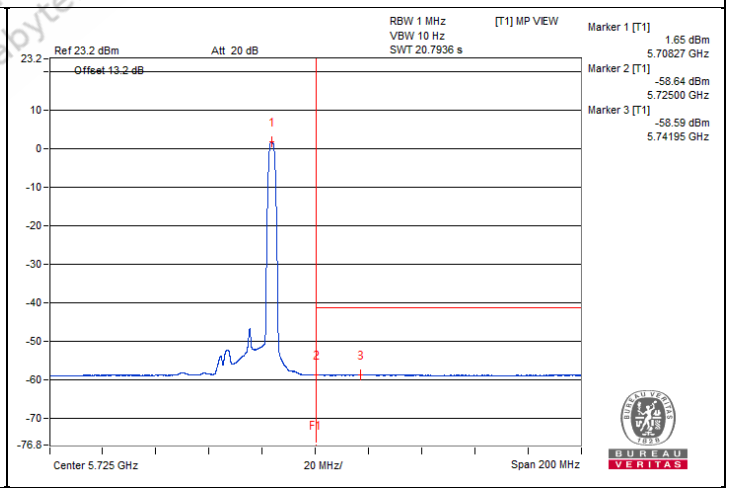

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@bridgeyte.com

802.11be (EHT20) 26-tone RU - Channel 144

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3801.56	57.74 PK	74	-16.26	-47.83	-49.79	8.17	-37.52
2	3825	46.47 AV	54	-7.53	-59.91	-60.03	8.17	-48.79
3	7643.75	59.1 PK	74	-14.9	-47.03	-47.67	8.17	-36.16
4	7637.5	48.1 AV	54	-5.9	-58.36	-58.32	8.17	-47.16
5	11434.37	60.23 PK	74	-13.77	-46.37	-46.05	8.17	-35.03
6	11420.31	49.15 AV	54	-4.85	-57.12	-57.46	8.17	-46.11
7	#17171.37	53.93 PK	68.2	-14.27	-52.97	-52.1	8.17	-41.33


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

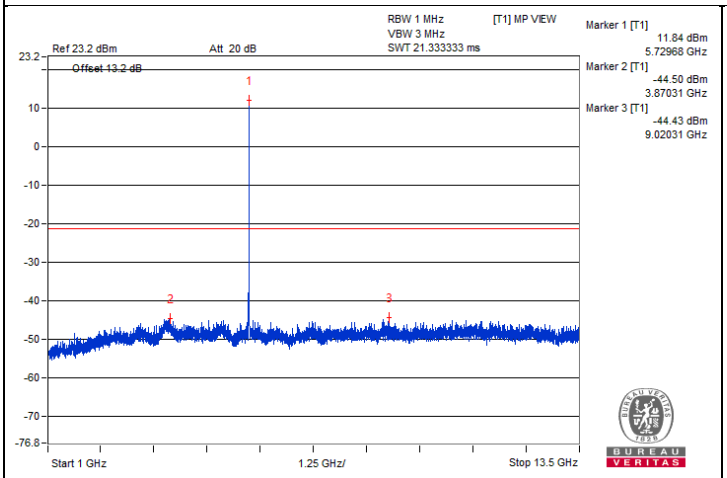


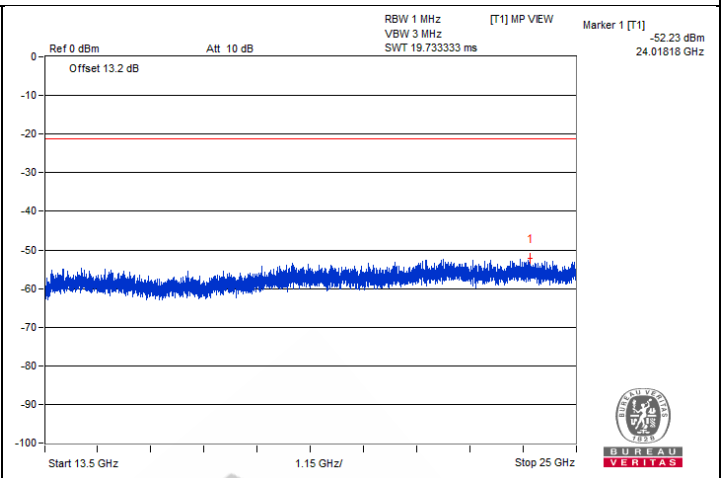

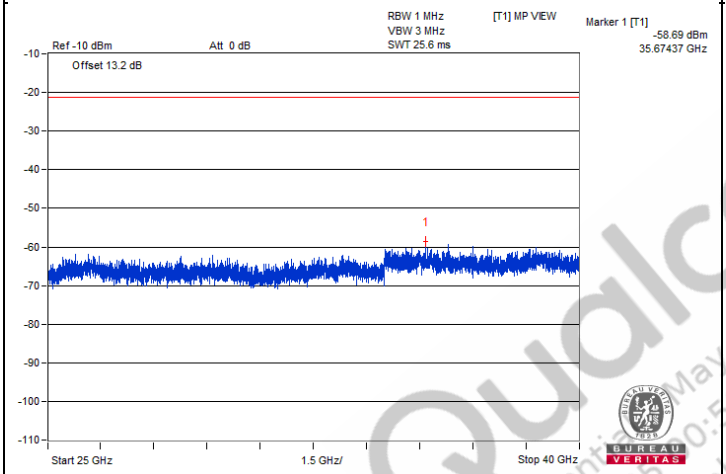

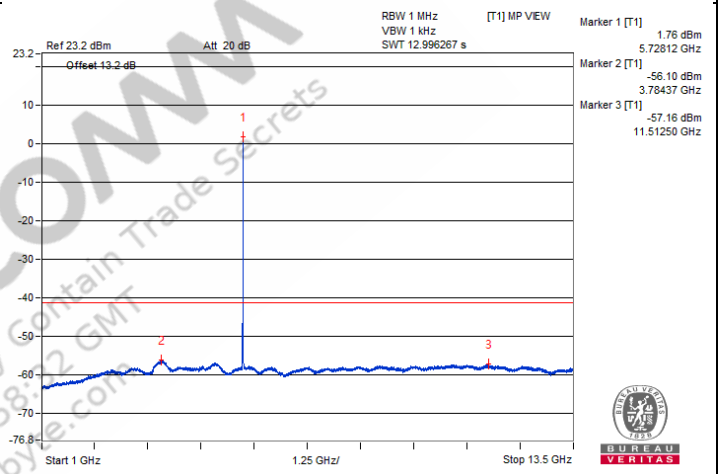


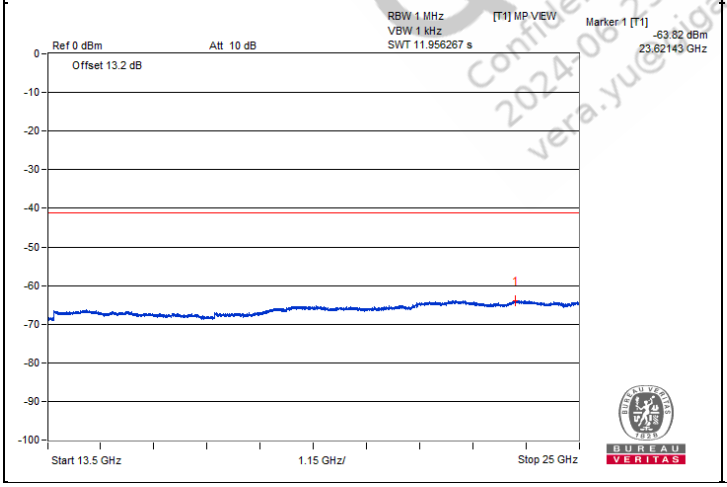


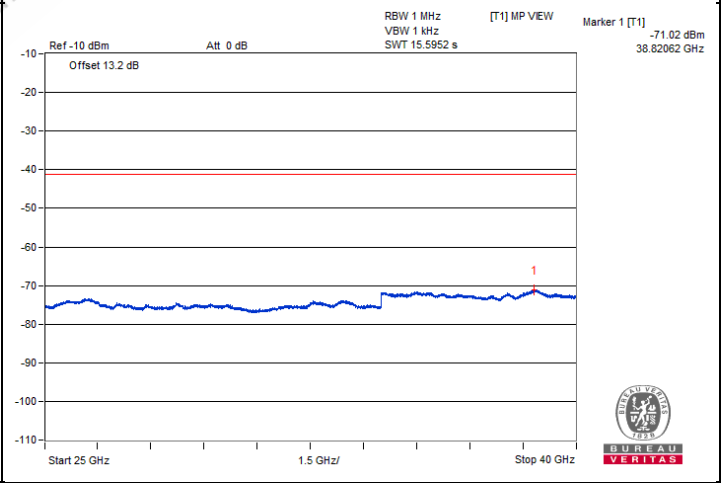



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

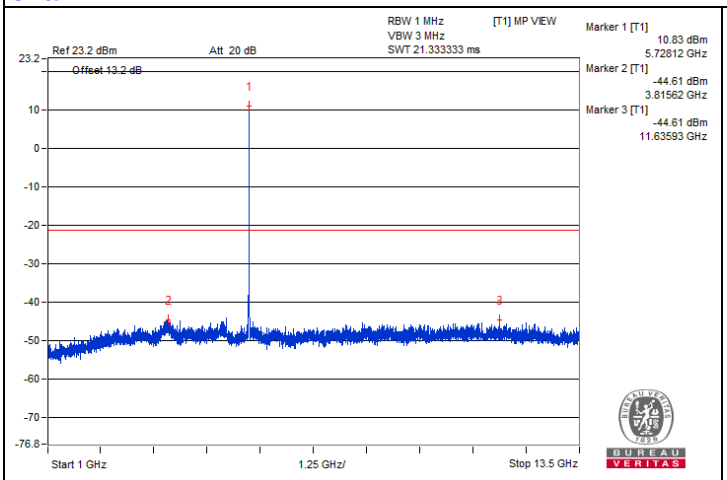


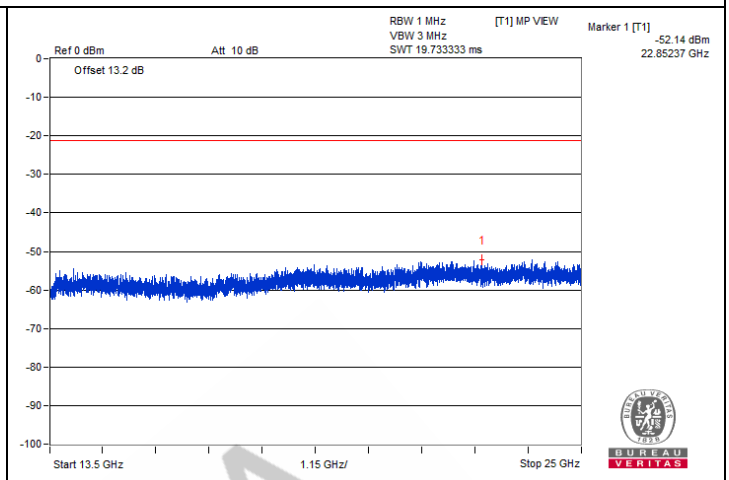

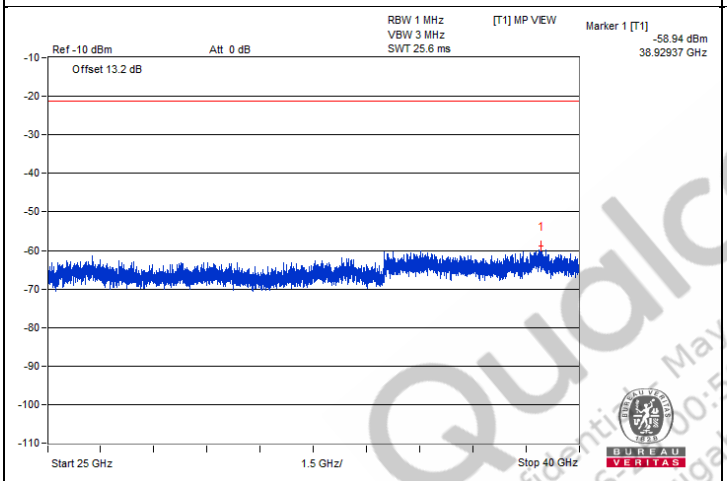

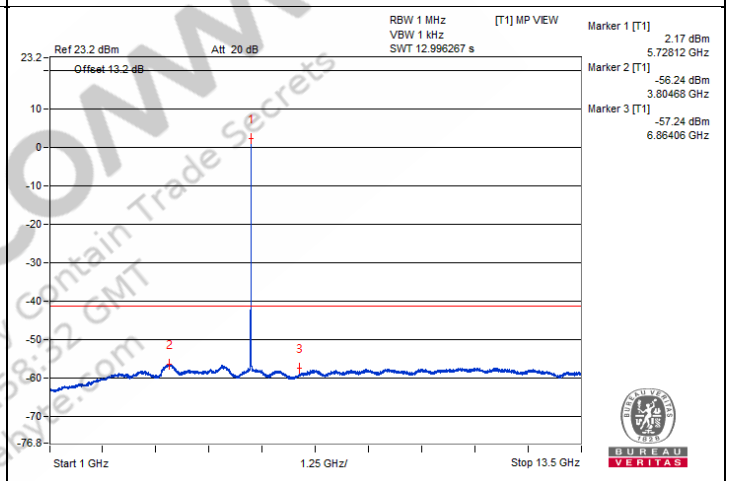

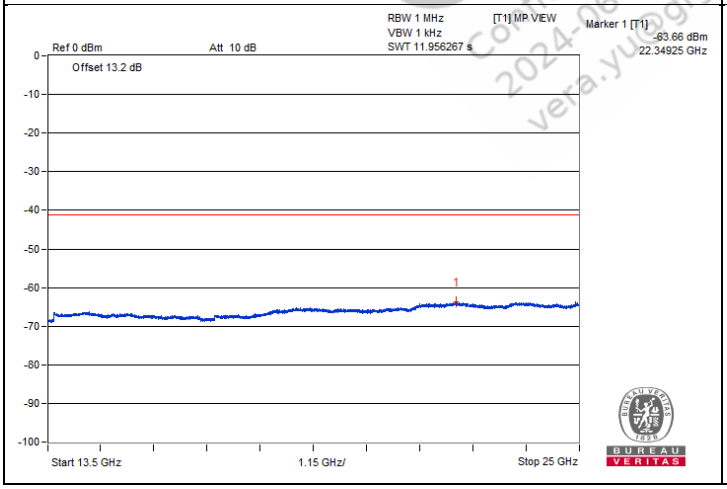

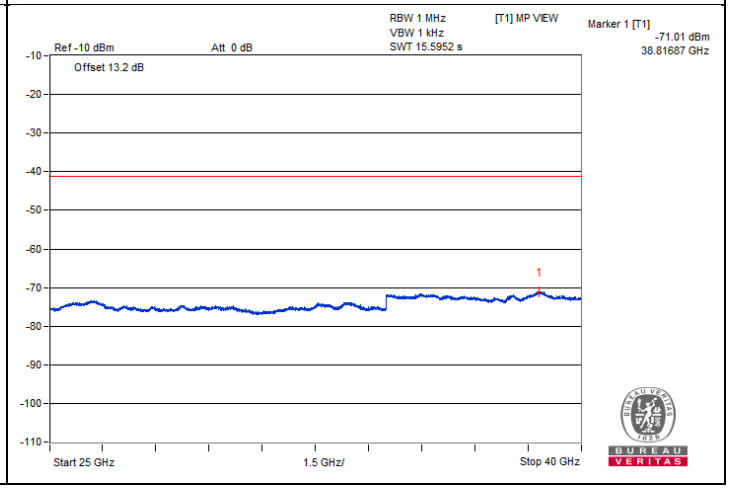

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5918.27	59.69 PK	68.2	-8.51	-46.86	-45.98	7.82	-35.57


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

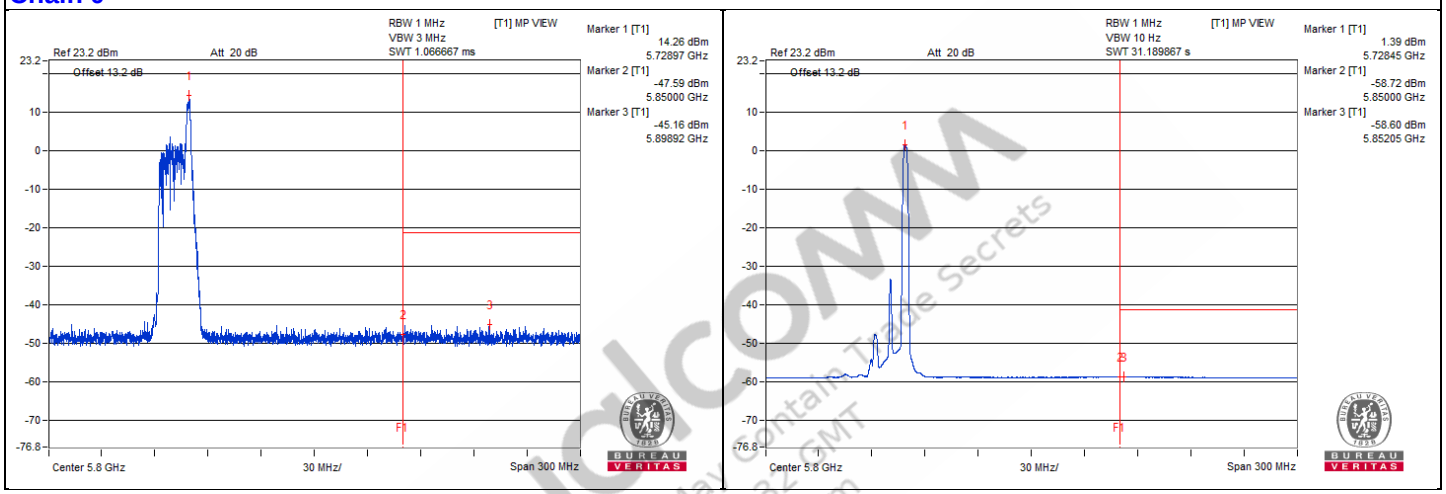

Chain 1

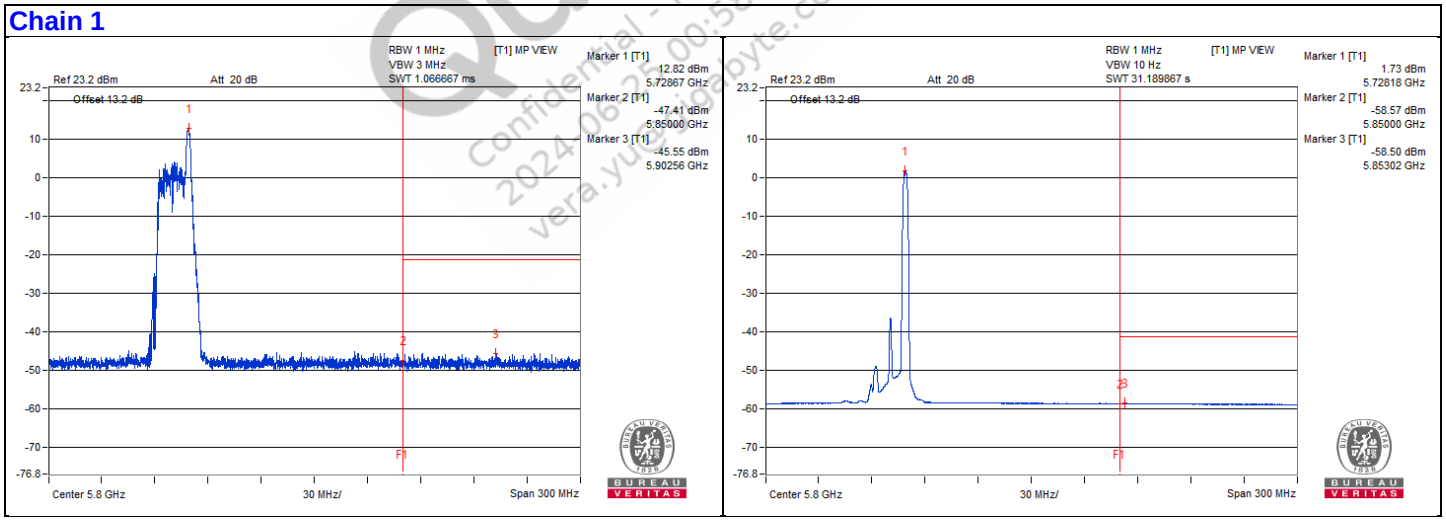

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yuan@globalbyte.com

802.11be (EHT20) 26-tone RU - Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3850	58 PK	74	-16	-48.11	-48.8	8.17	-37.26
2	3846.87	46.42 AV	54	-7.58	-59.94	-60.1	8.17	-48.84
3	7656.25	60.09 PK	74	-13.91	-45.32	-47.71	8.17	-35.17
4	7646.87	47.96 AV	54	-6.04	-58.3	-58.66	8.17	-47.30
5	11492.18	60.05 PK	74	-13.95	-46	-46.81	8.17	-35.21
6	11495.31	48.85 AV	54	-5.15	-57.48	-57.71	8.17	-46.41
7	#17241.81	53.41 PK	68.2	-14.79	-53.83	-52.35	8.17	-41.85


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

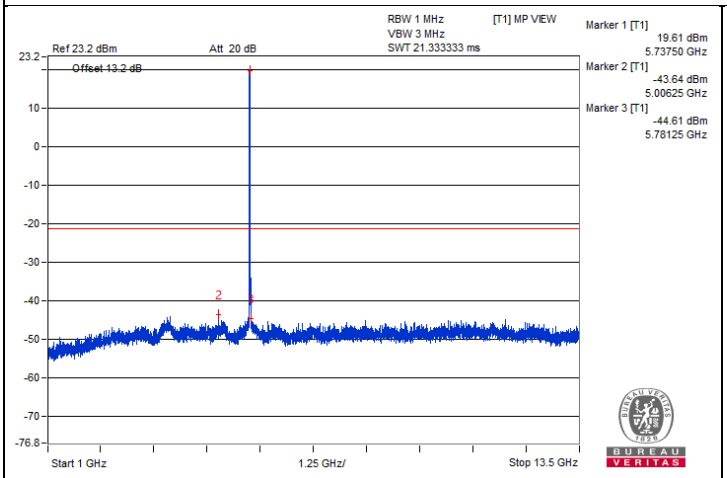


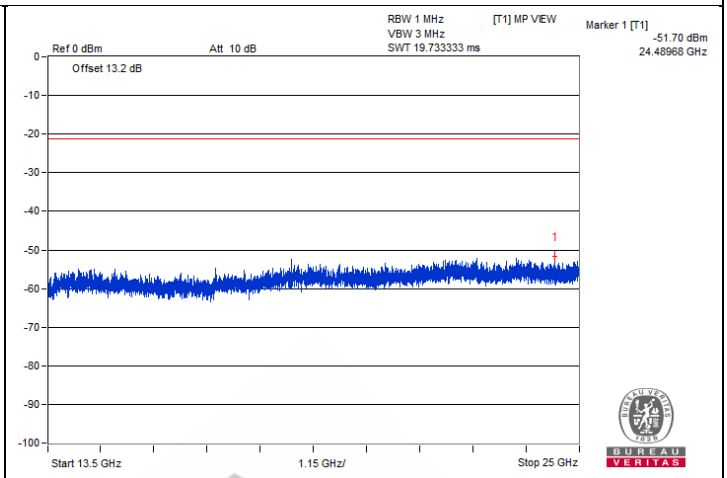

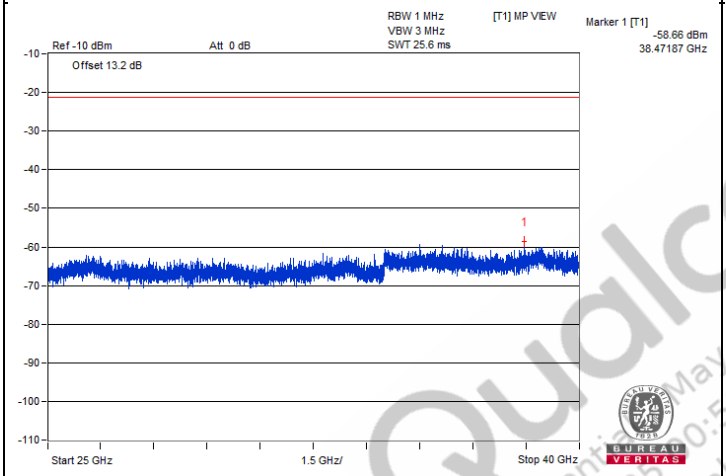

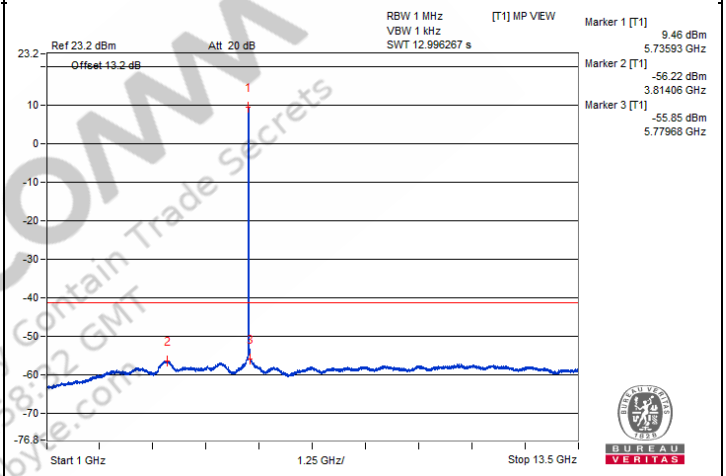


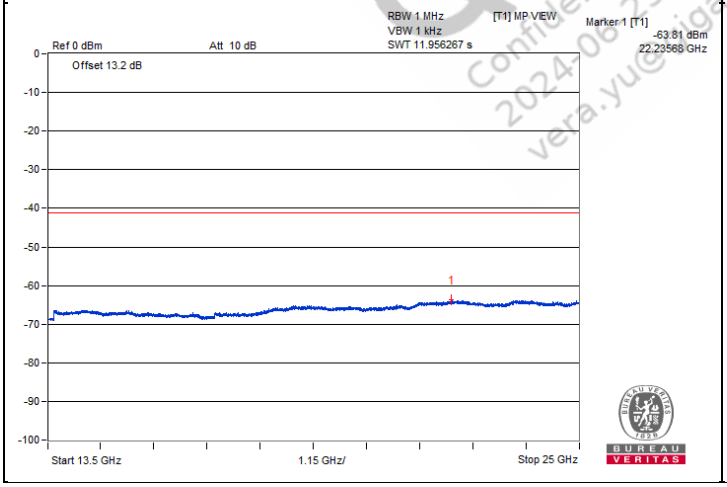


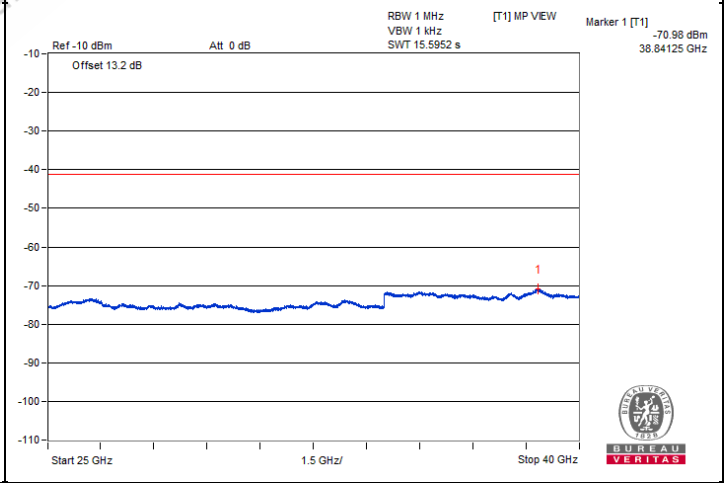



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

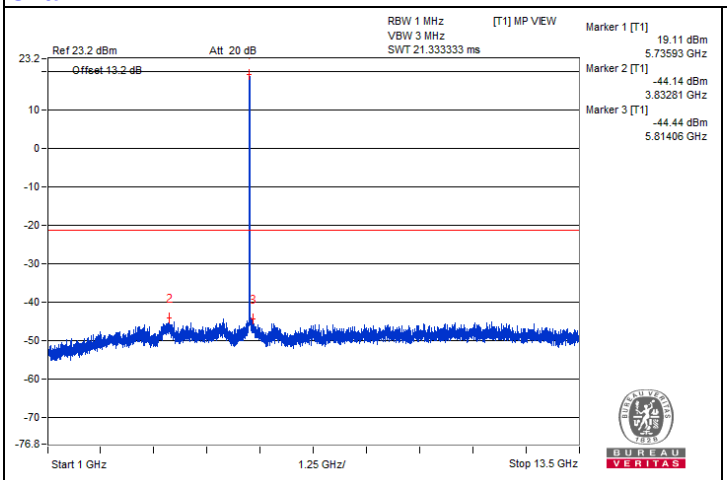


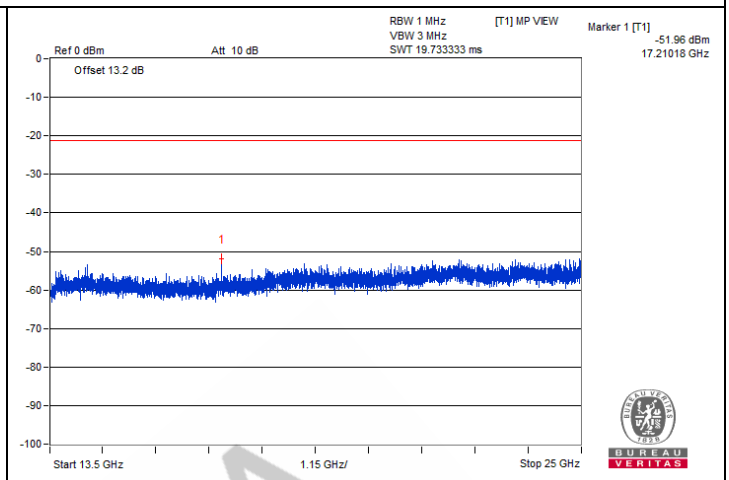

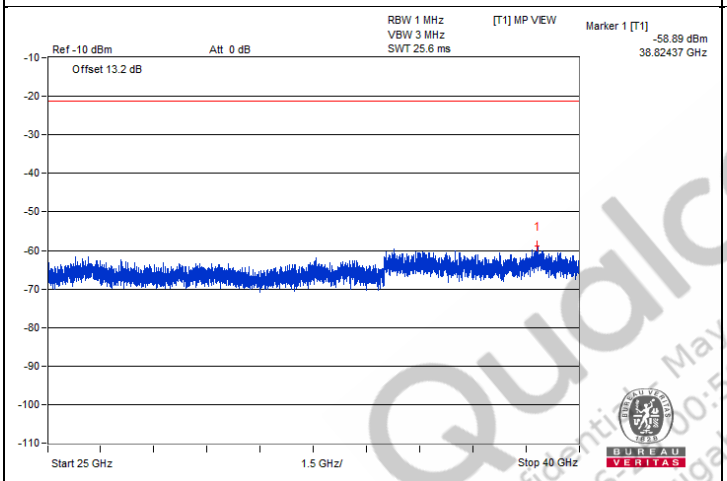

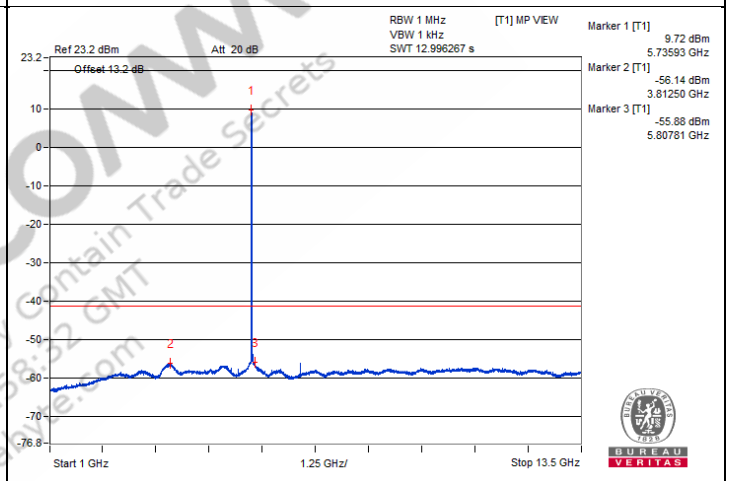

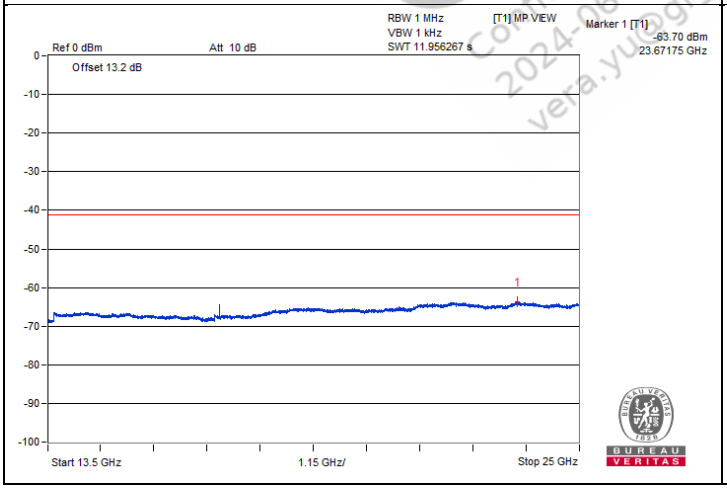


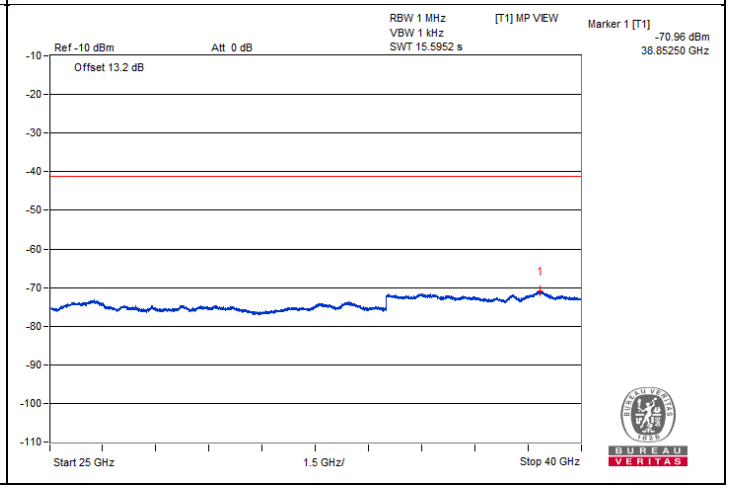

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

Chain 0

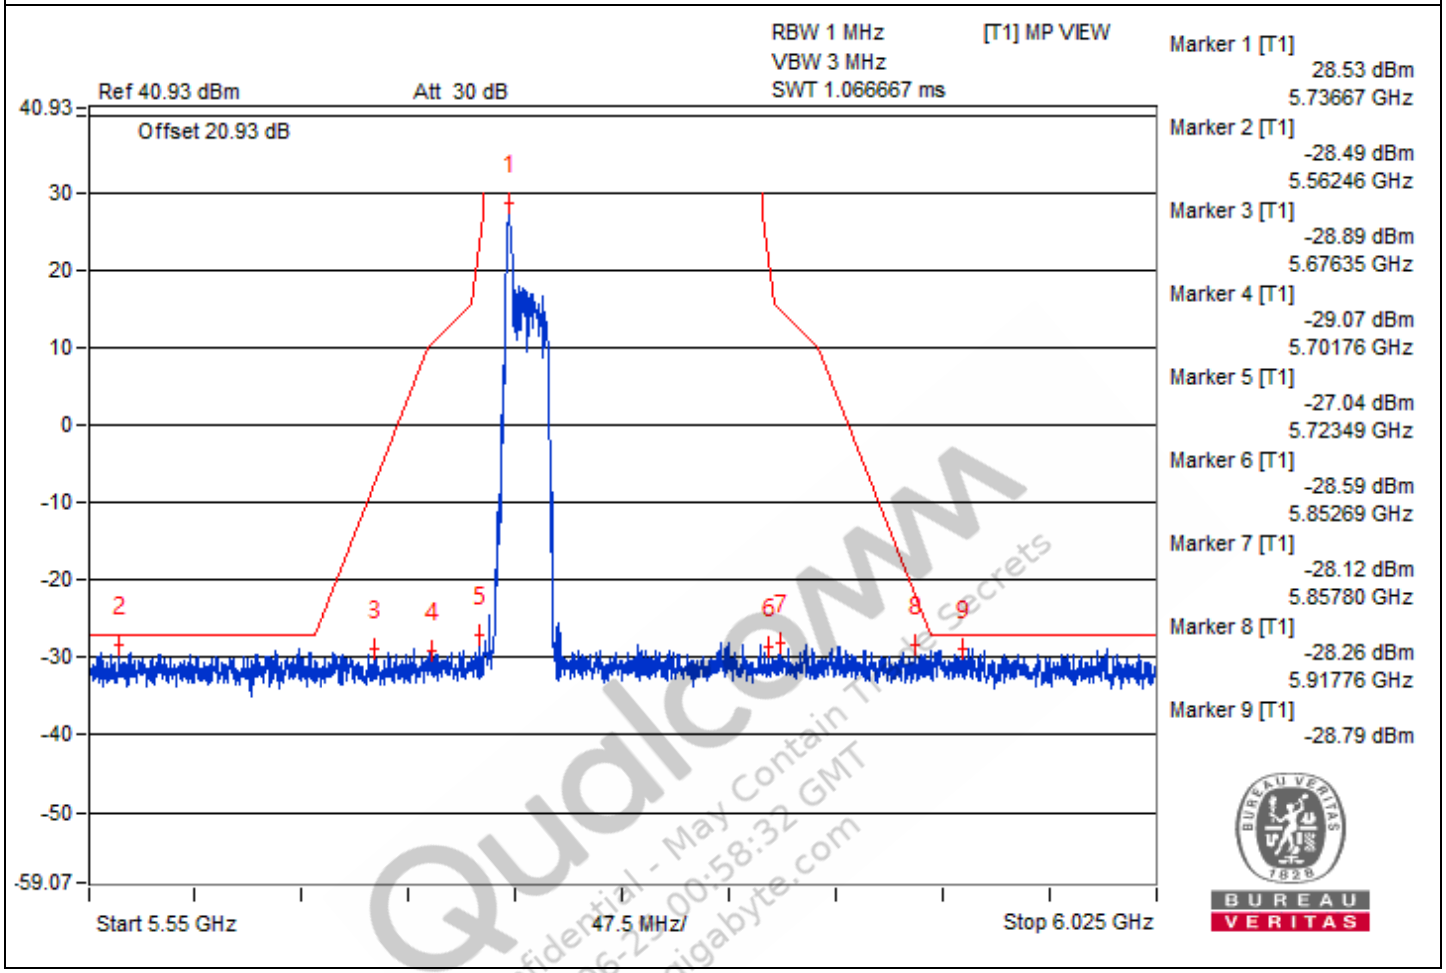

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

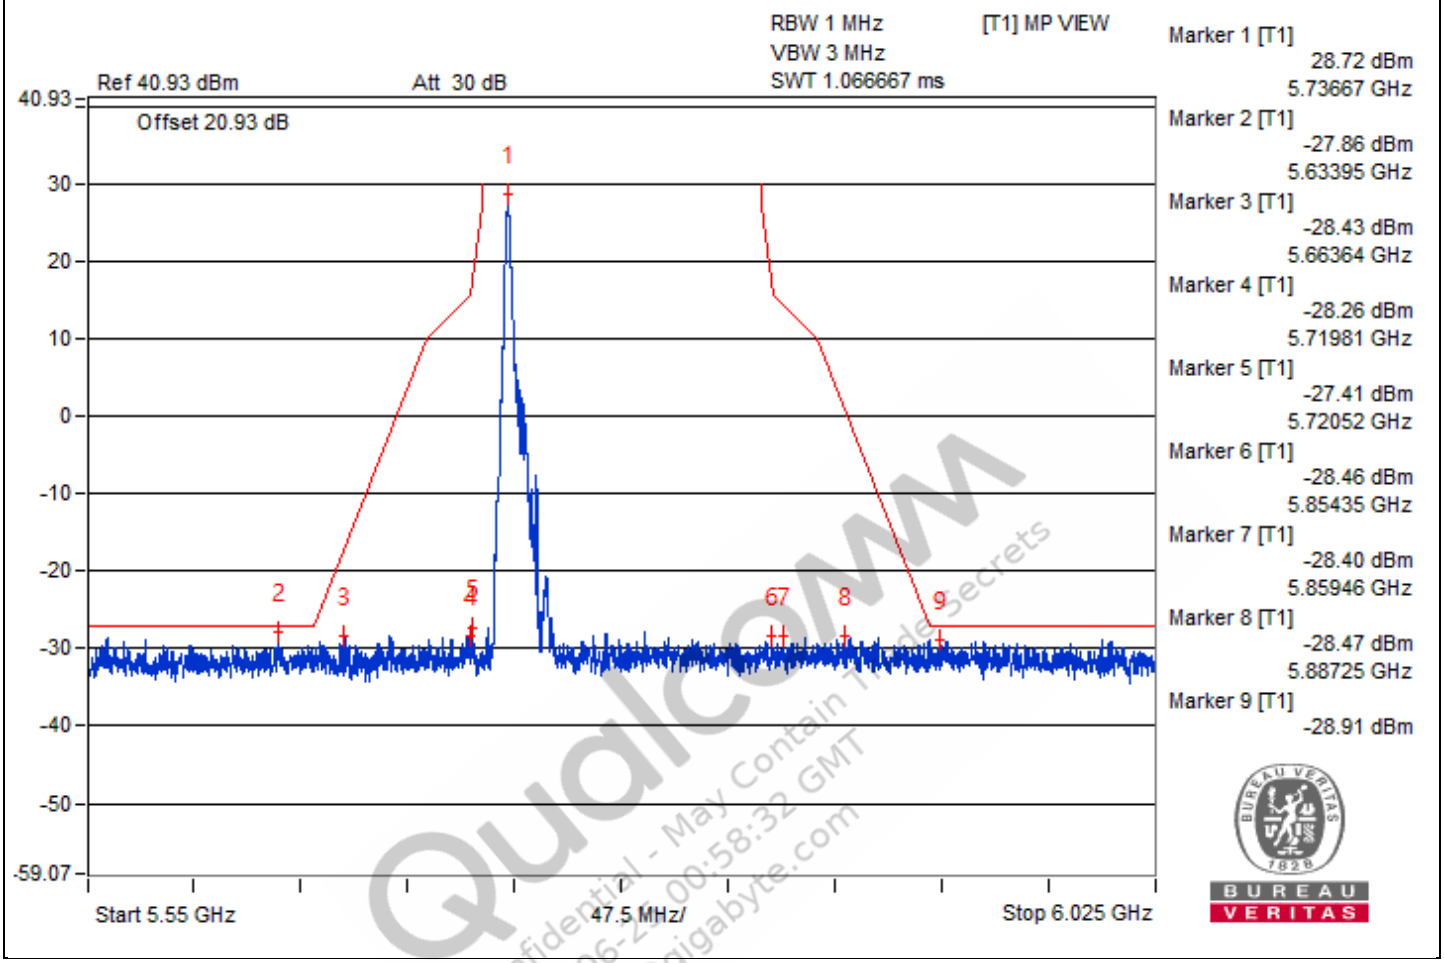

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT20) 26-tone RU - Channel 157

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3865.62	58.17 PK	74	-15.83	-48.63	-47.93	8.17	-37.09
2	3859.37	46.57 AV	54	-7.43	-59.9	-59.84	8.17	-48.69
3	7696.87	58.66 PK	74	-15.34	-48	-47.57	8.17	-36.60
4	7718.75	47.51 AV	54	-6.49	-58.79	-59.08	8.17	-47.75
5	11573.43	61.34 PK	74	-12.66	-44.27	-46.12	8.17	-33.92
6	11582.81	49.41 AV	54	-4.59	-56.7	-57.39	8.17	-45.85
7	#17366.87	53.22 PK	68.2	-14.98	-52.35	-54.3	8.17	-42.04


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

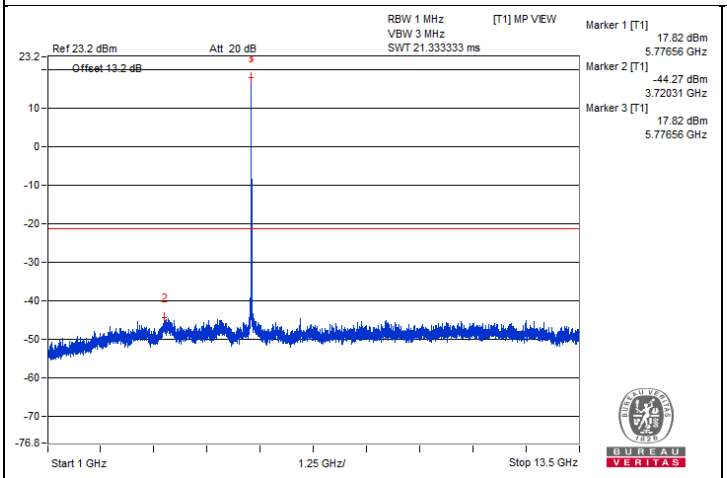


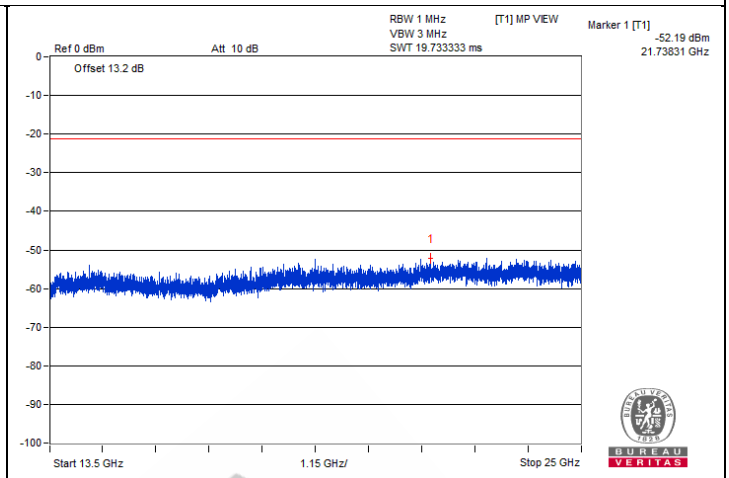

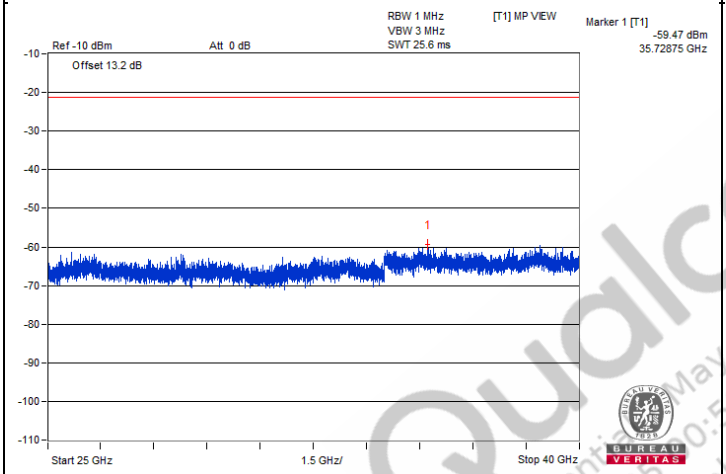

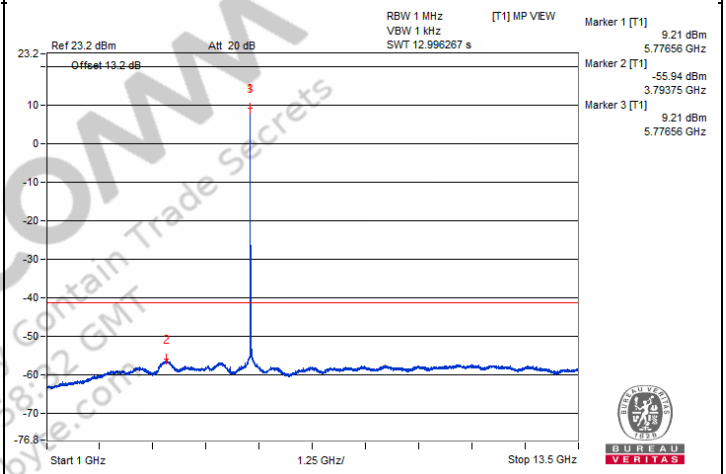


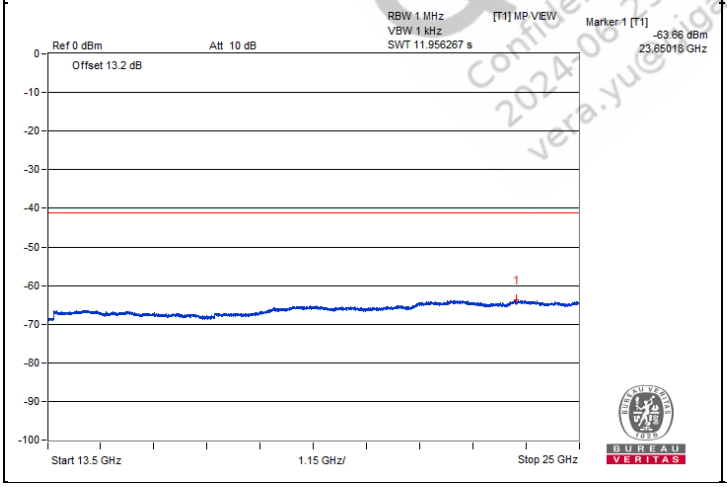


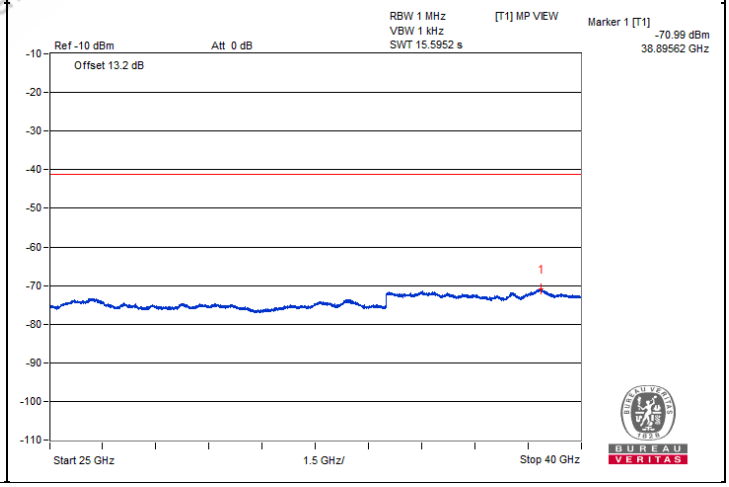



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

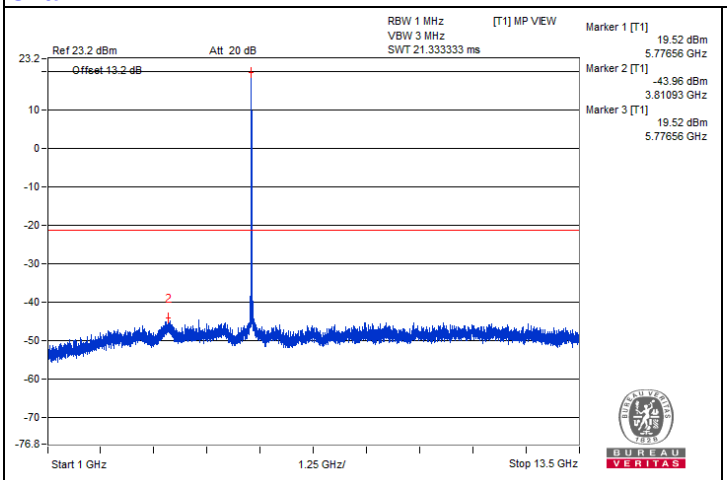


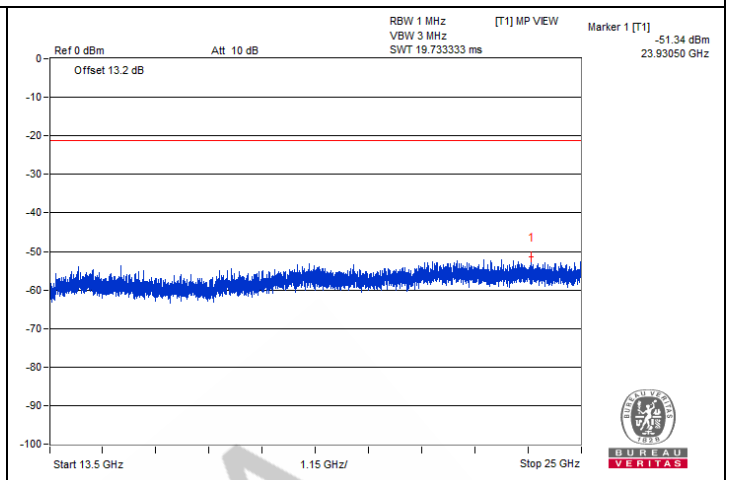

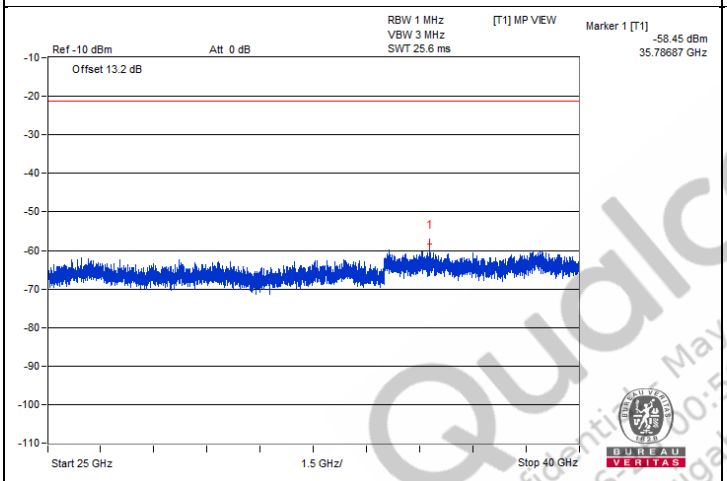

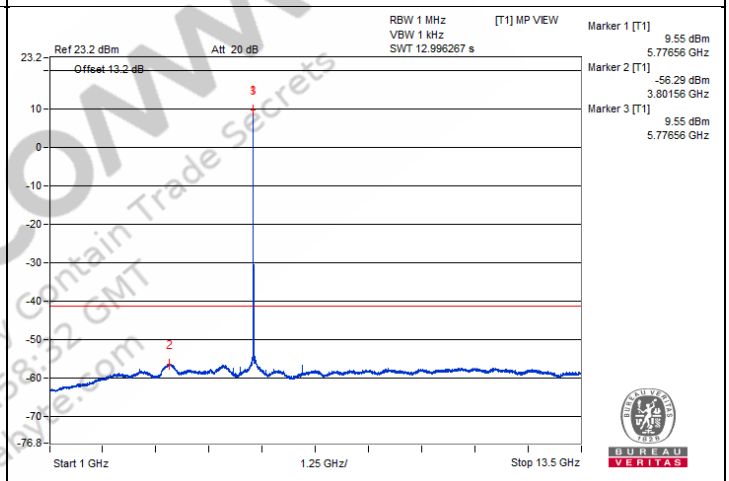

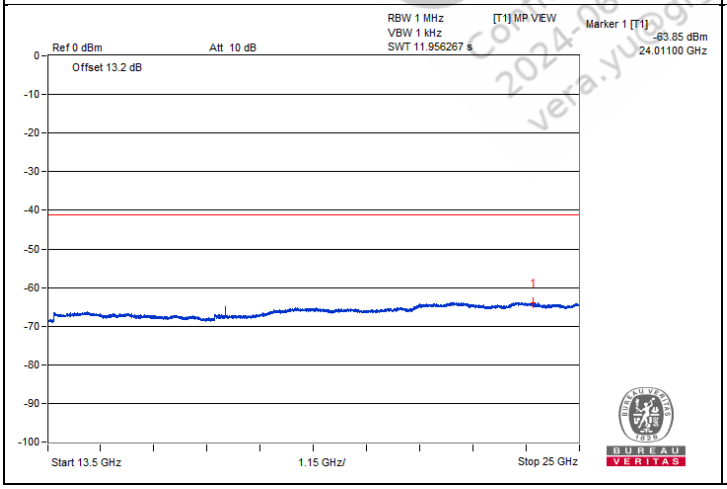


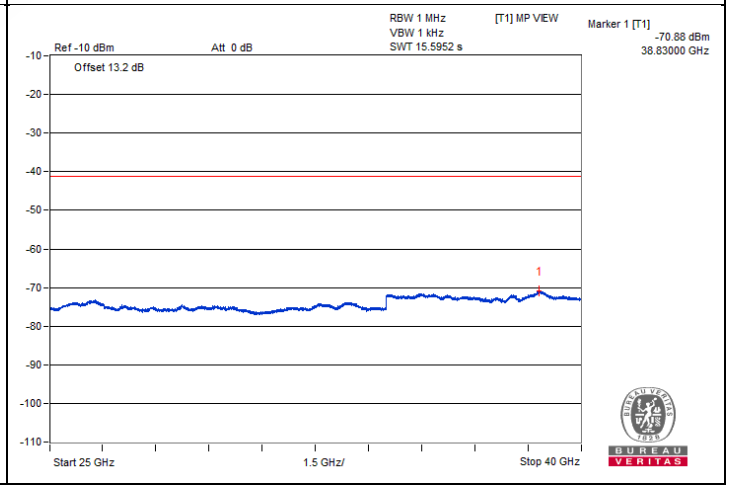

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

Chain 0

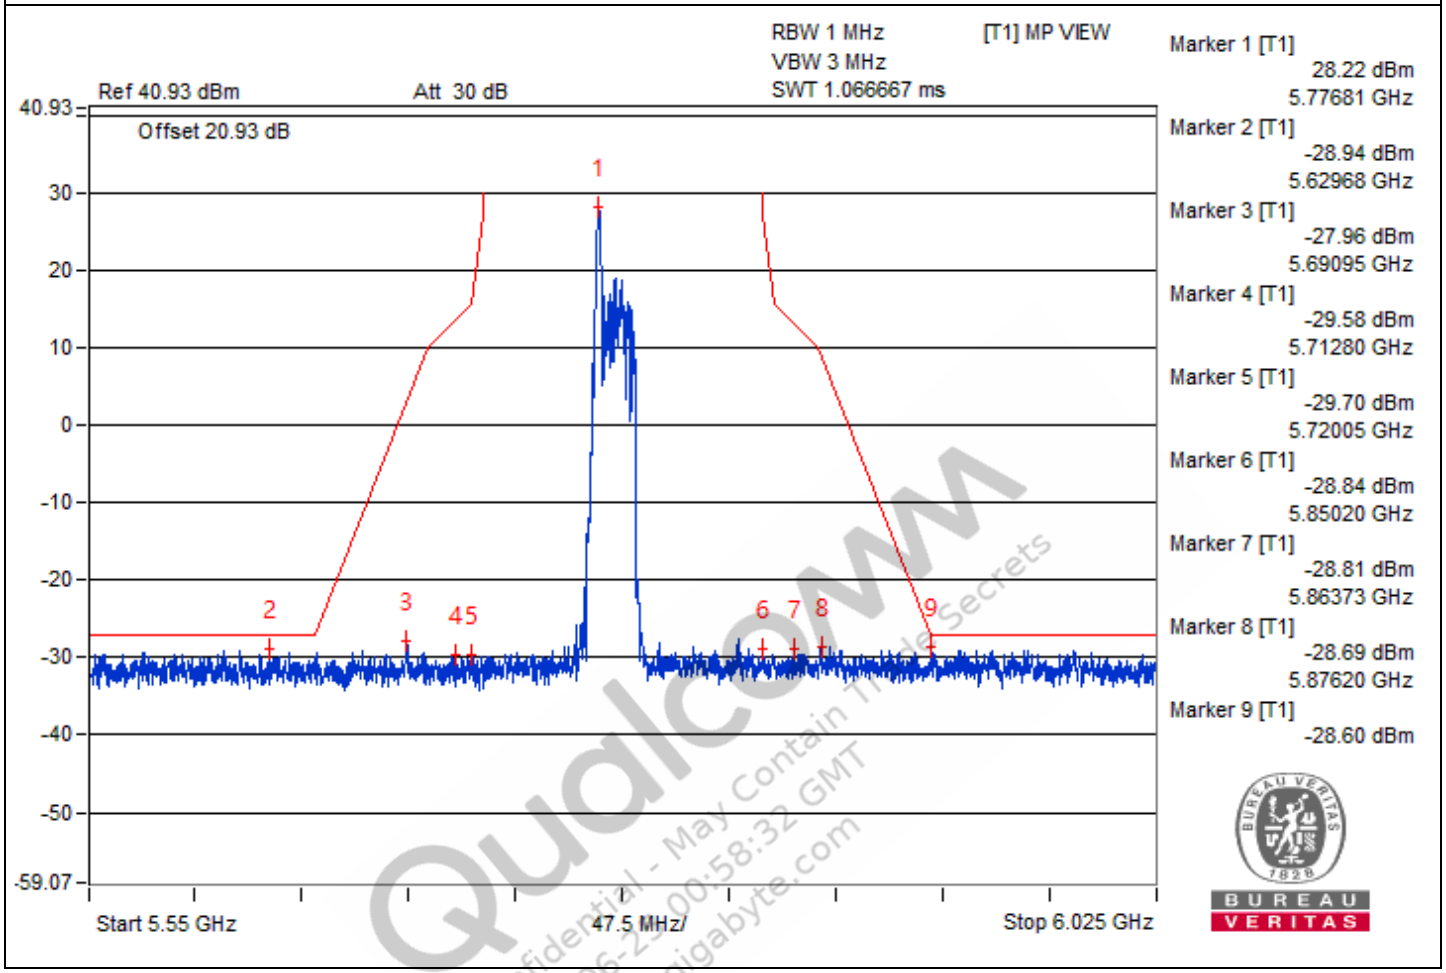

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

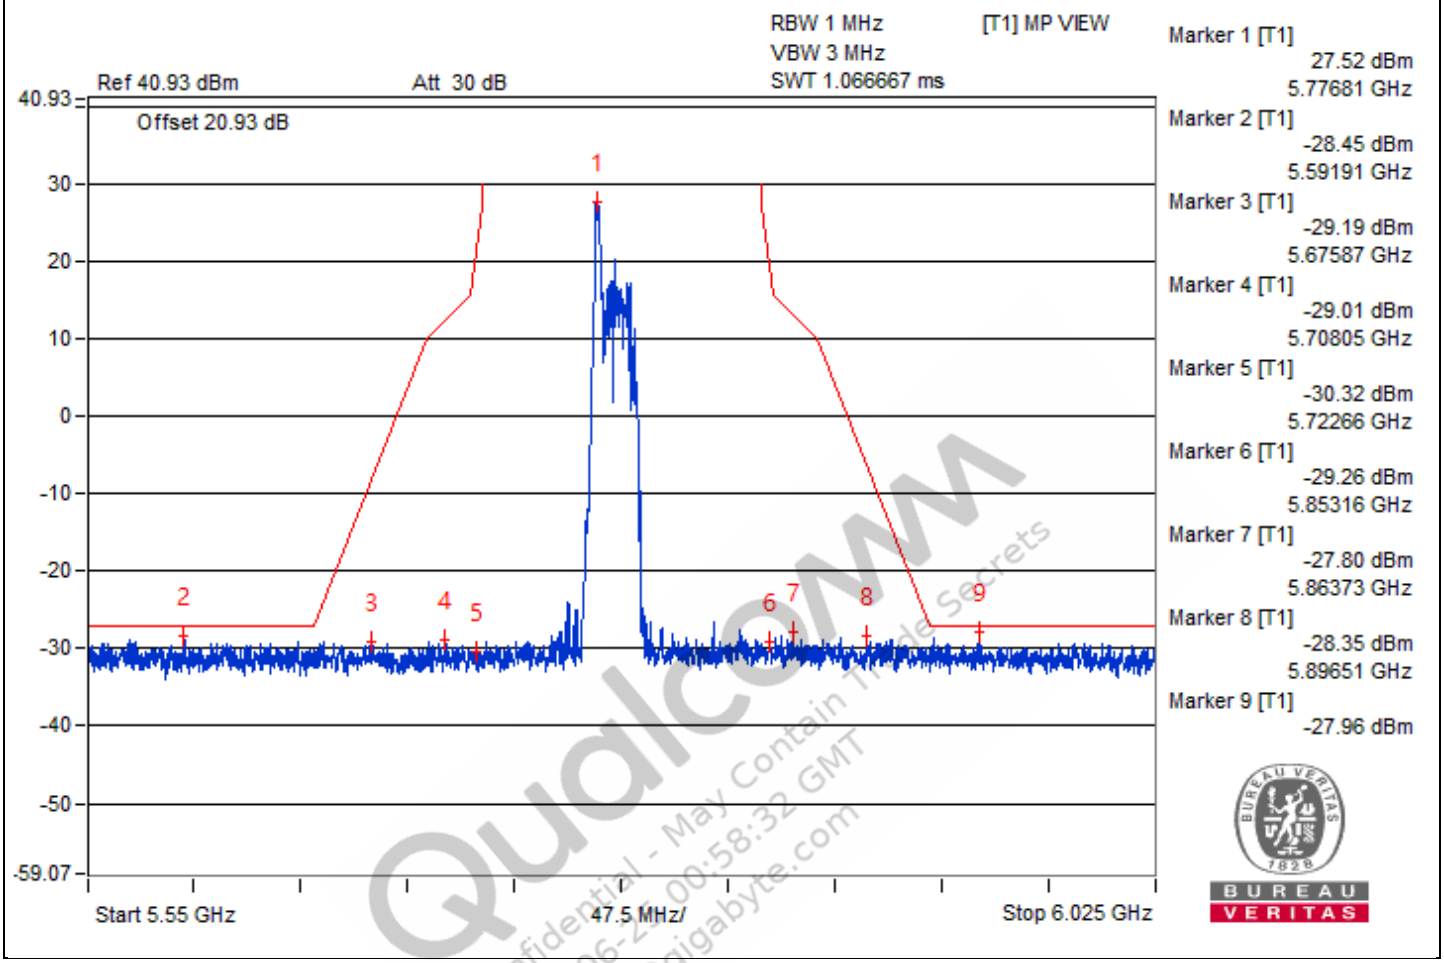

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT20) 26-tone RU - Channel 165

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3878.12	57.04 PK	74	-16.96	-50.81	-48.33	8.17	-38.22
2	3893.75	46.67 AV	54	-7.33	-59.8	-59.74	8.17	-48.59
3	#7759.37	59.26 PK	68.2	-8.94	-47.25	-47.11	8.17	-36.00
4	11648.43	60.92 PK	74	-13.08	-45.35	-45.7	8.17	-34.34
5	11651.56	50.05 AV	54	-3.95	-56.5	-56.28	8.17	-45.21
6	#17477.56	54.06 PK	68.2	-14.14	-53.71	-51.37	8.17	-41.20


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

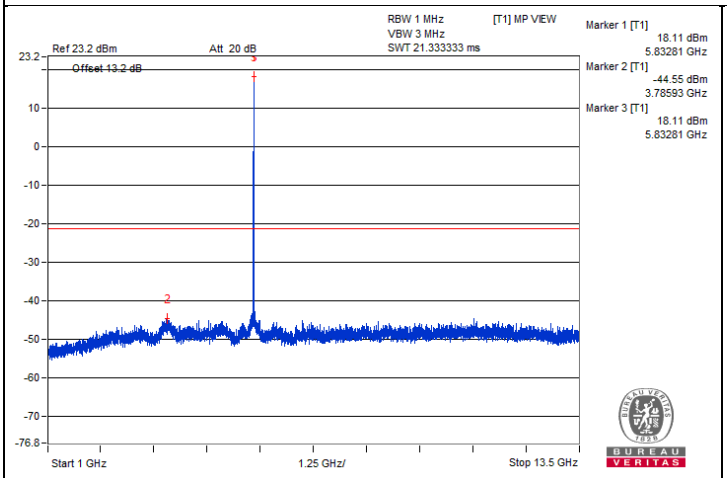


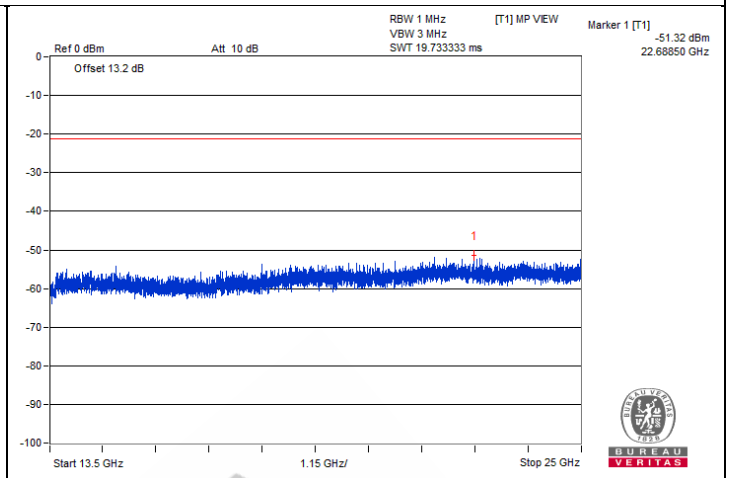

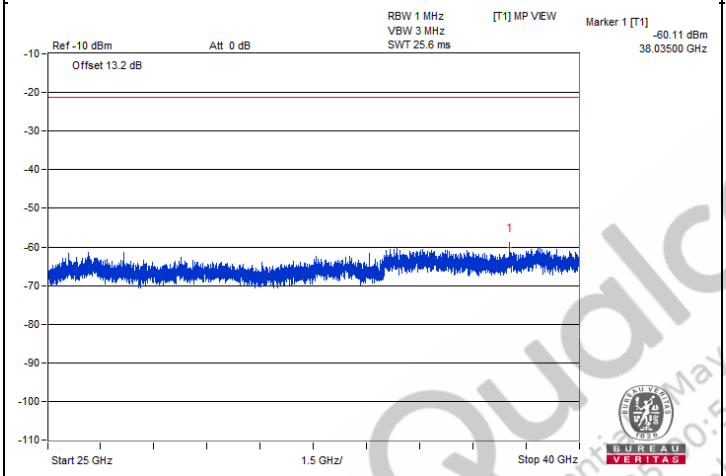

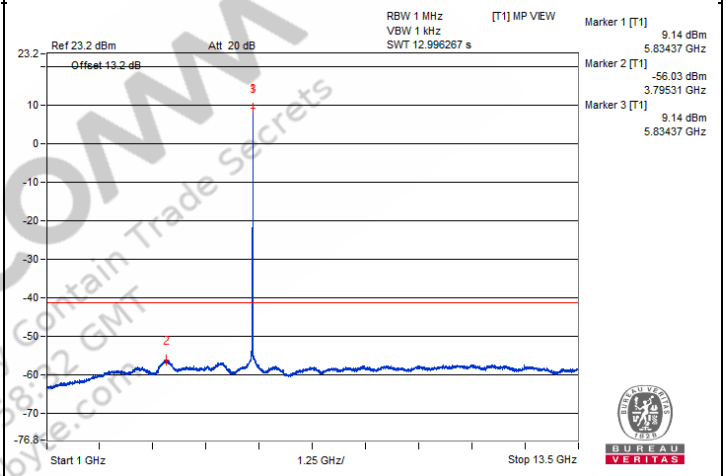


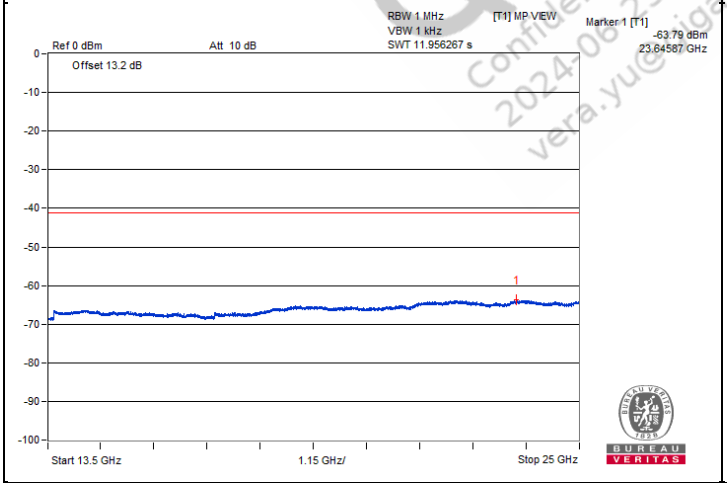


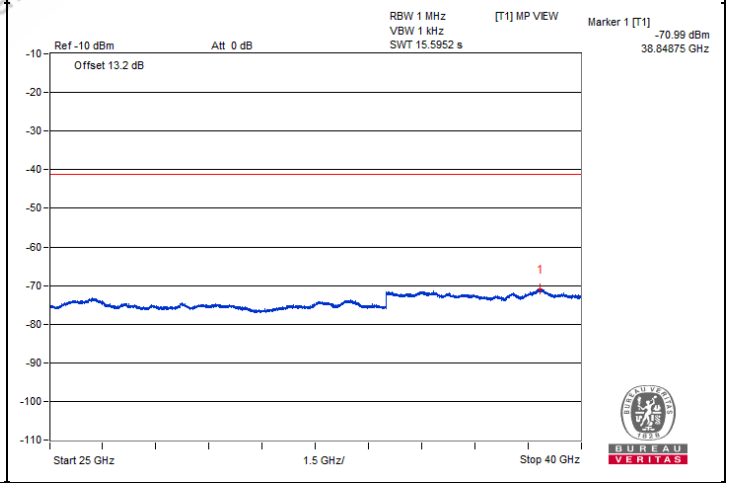



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

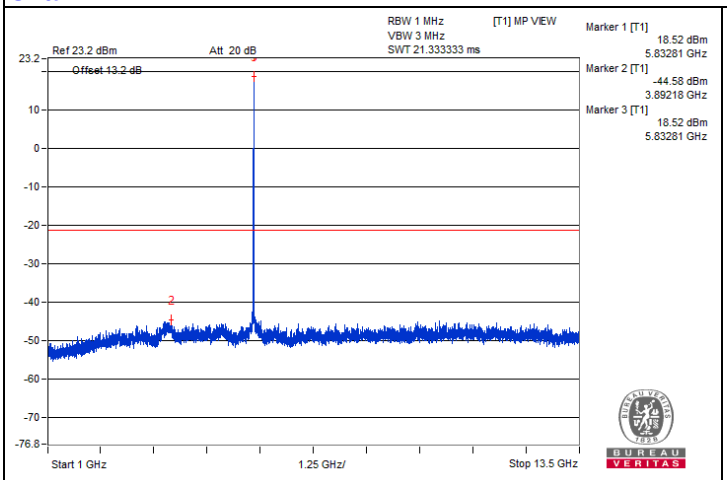


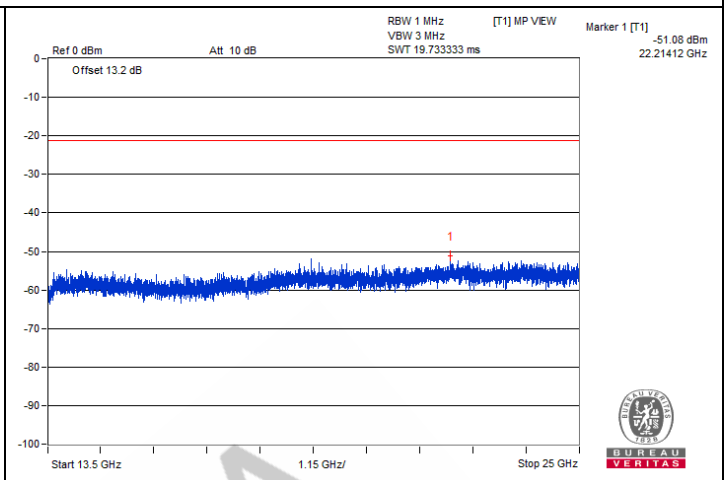

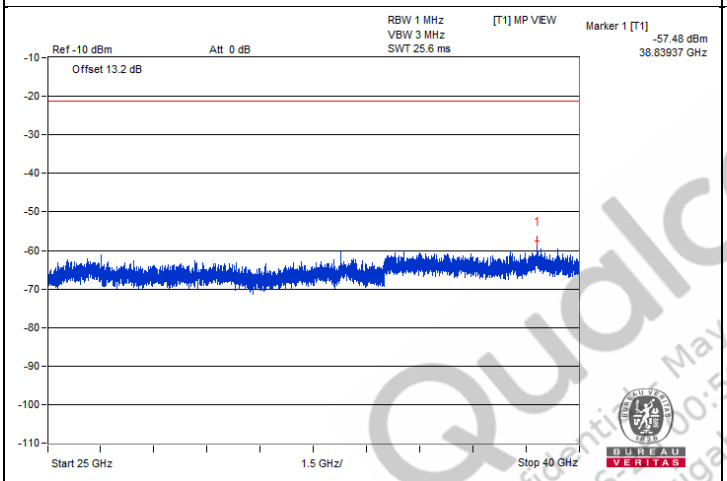

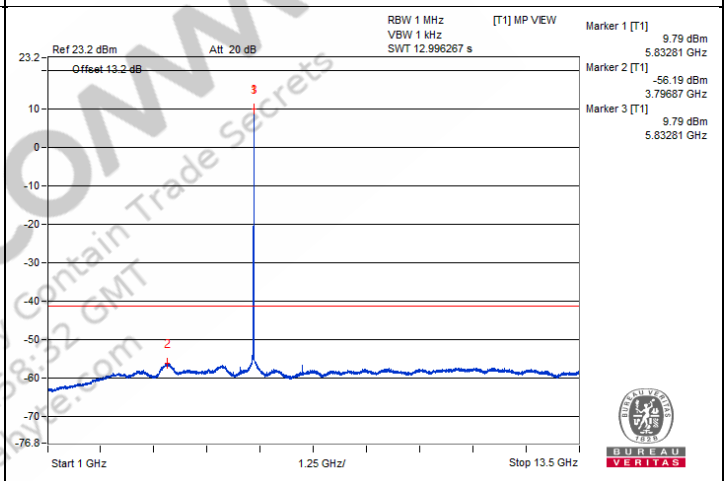

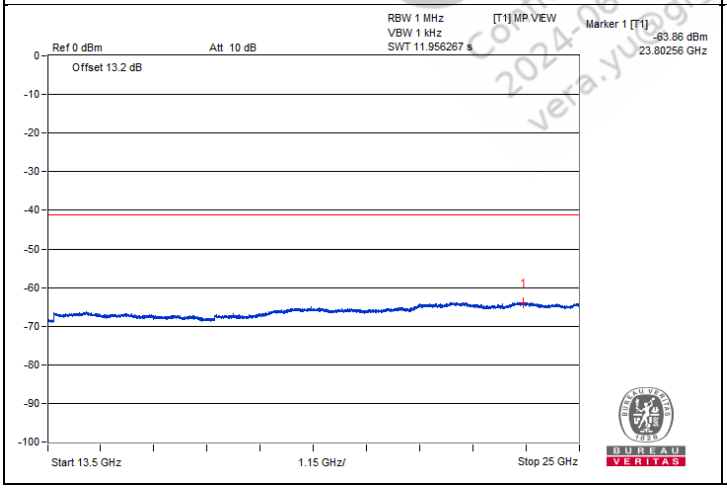


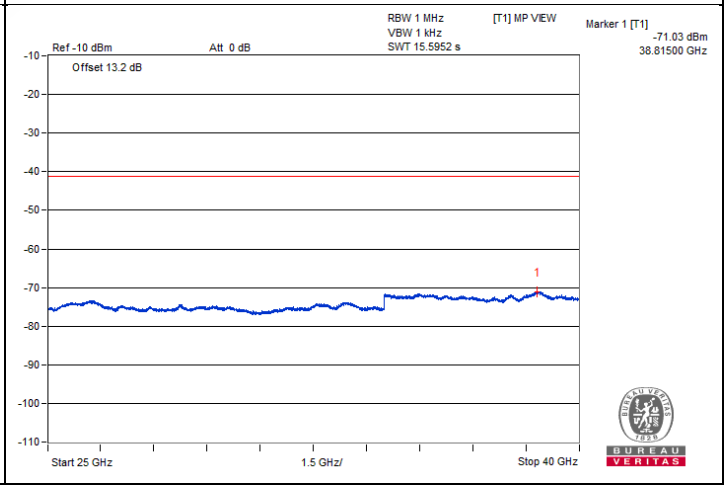

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

Chain 0

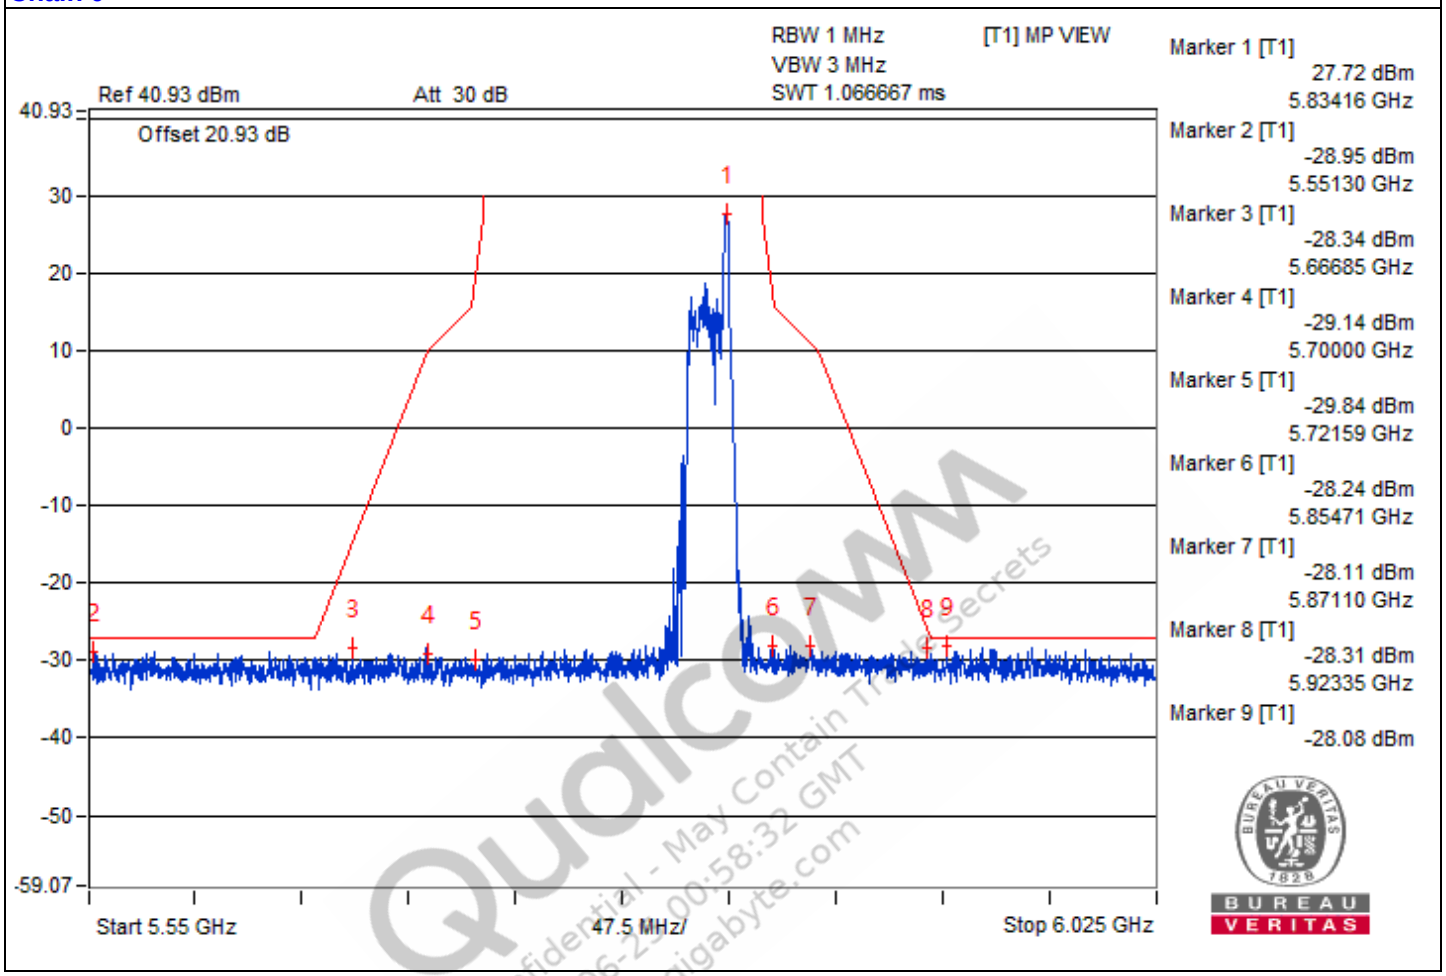

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

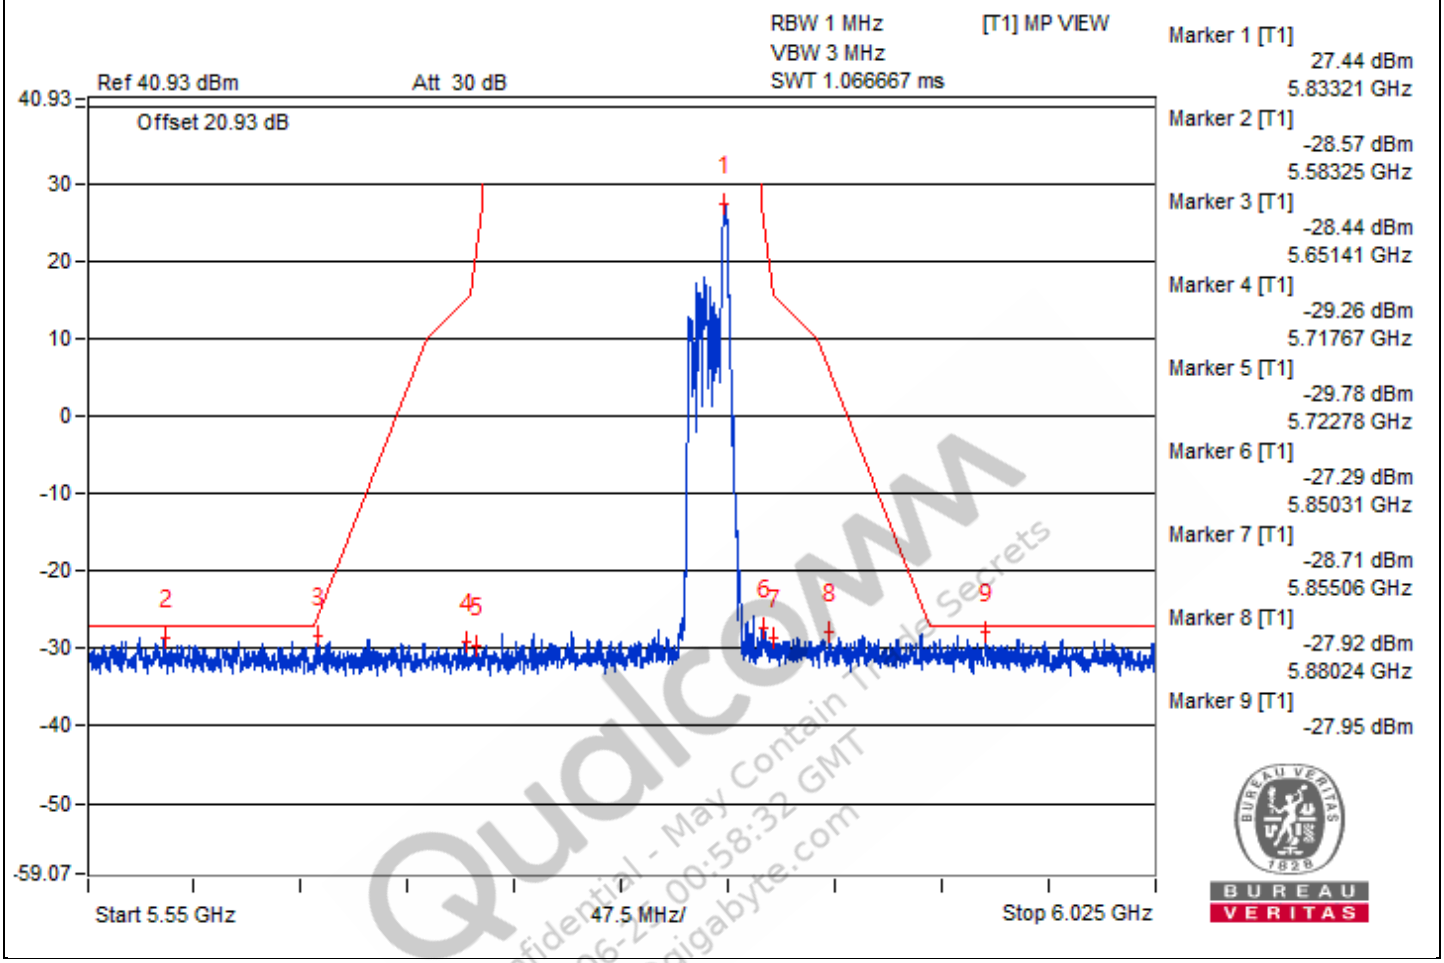

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT20) 52-tone RU - Channel 36

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3446.87	58.56 PK	68.2	-9.64	-47.14	-48.78	8.17	-36.70
2	#6892.18	57.71 PK	68.2	-10.49	-48.33	-49.18	8.17	-37.55
3	#10354.68	59.31 PK	68.2	-8.89	-46.1	-48.48	8.17	-35.95
4	15554.18	48.93 PK	74	-25.07	-57.07	-58	8.17	-46.33
5	15551.31	39.04 AV	54	-14.96	-67.38	-67.43	8.17	-56.22


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

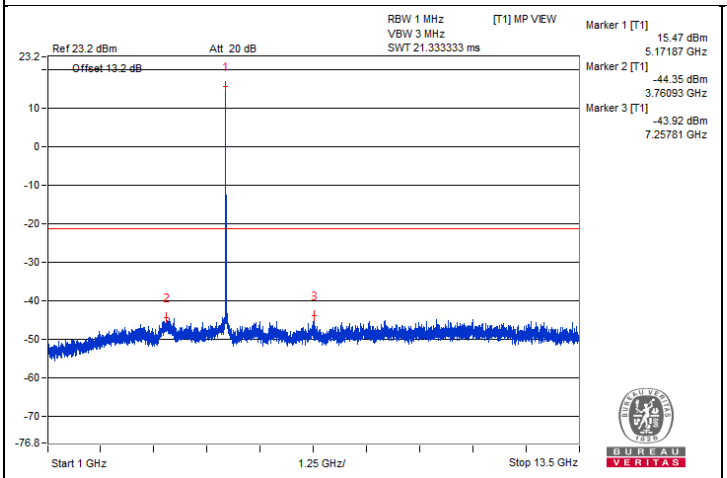


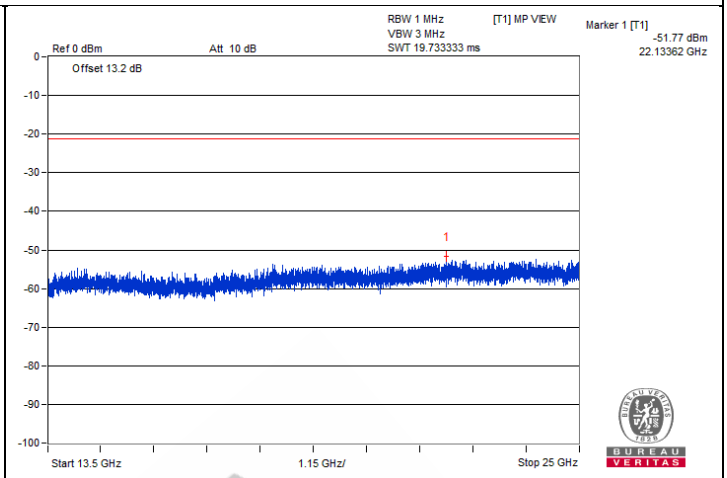

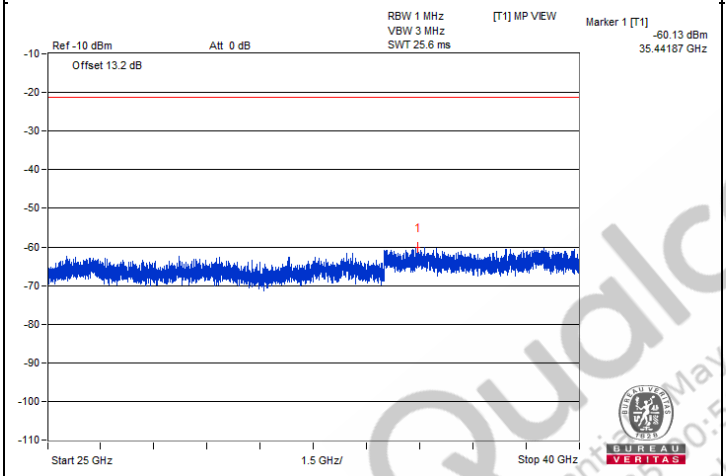

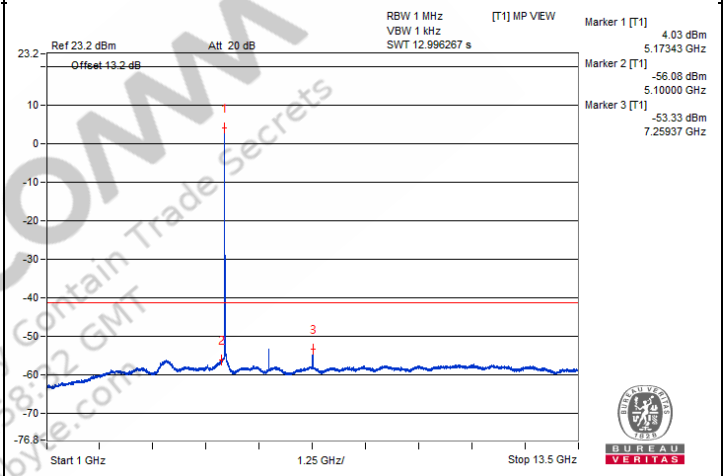


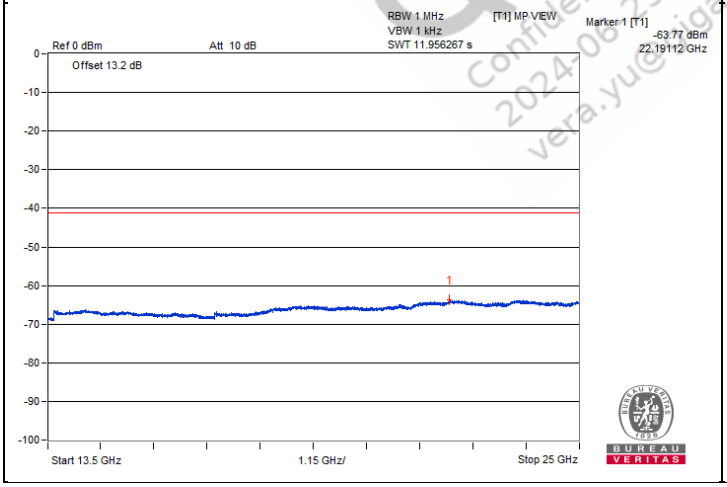


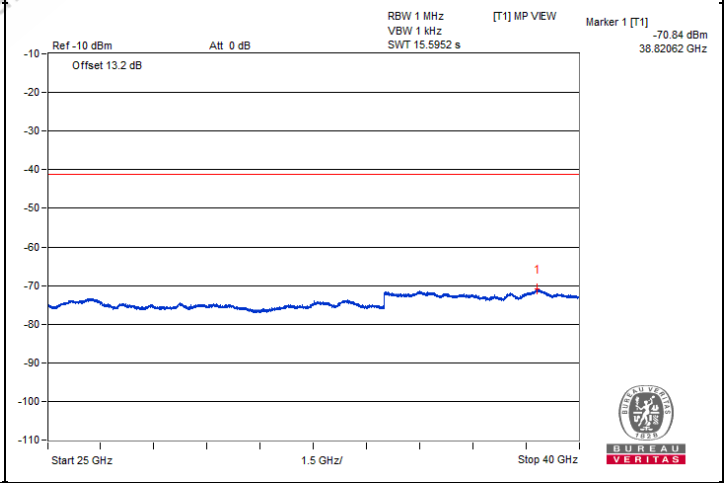



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

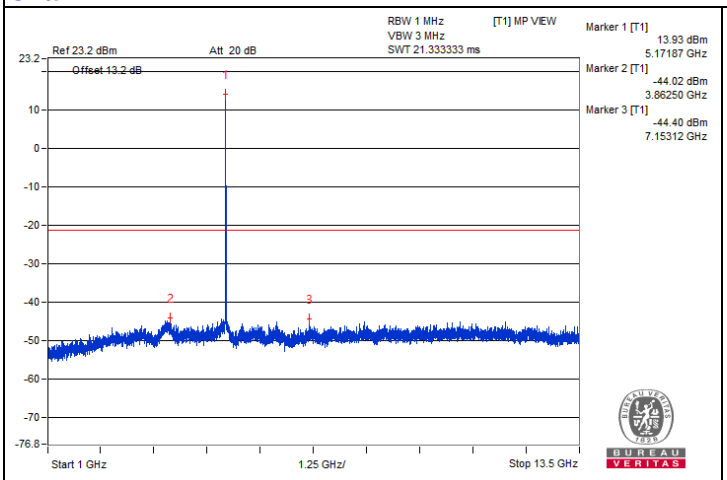


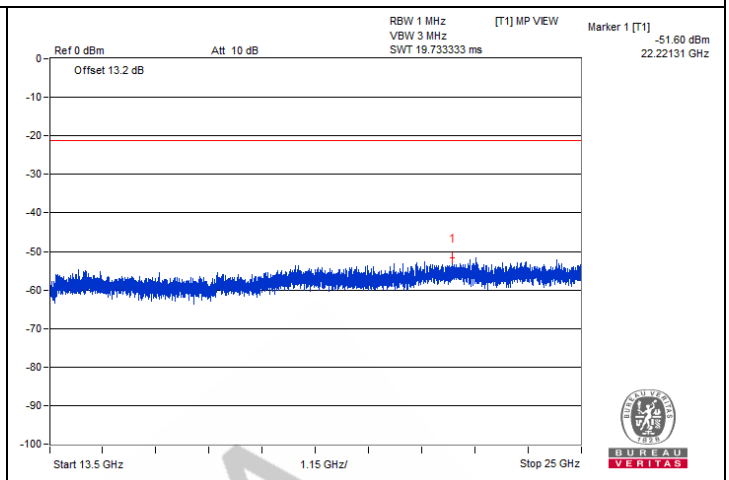

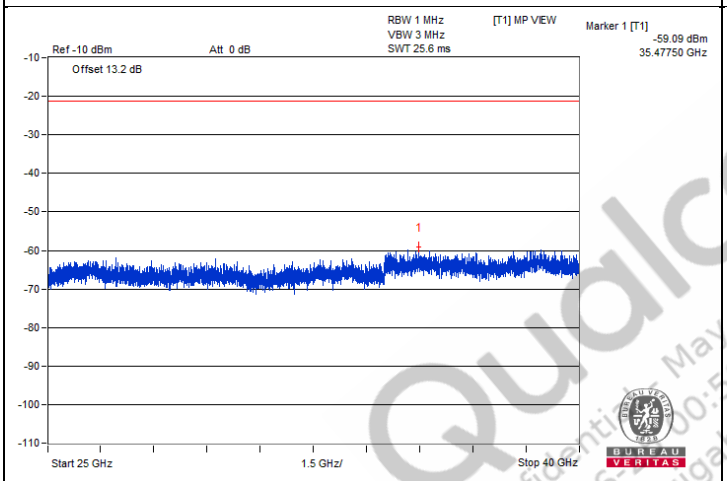

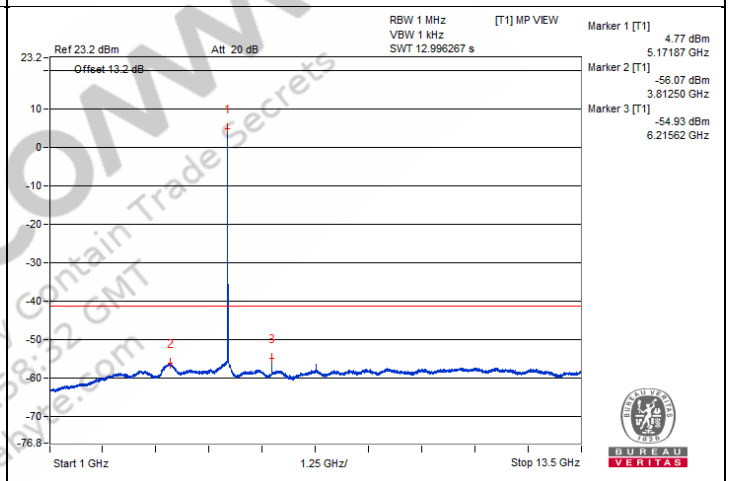

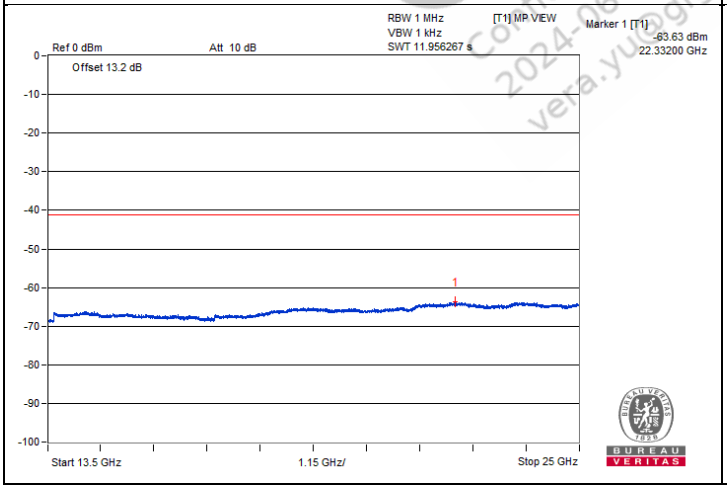

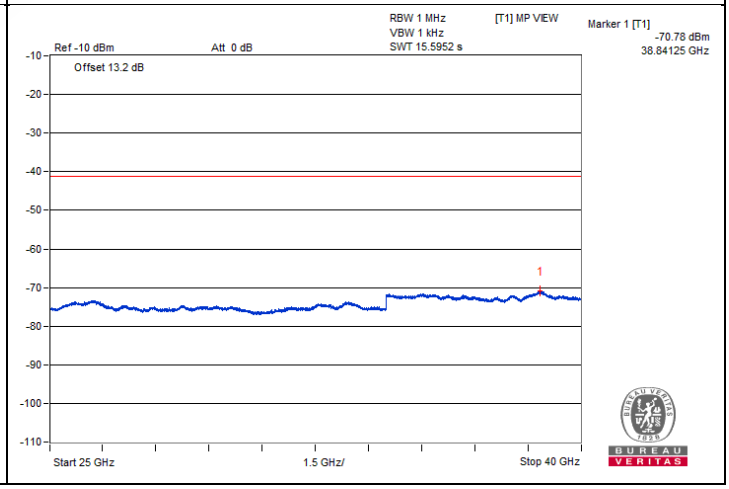

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@bgatvre.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5122.9	70.23 PK	74	-3.77	-34.68	-34.13	6.36	-25.03
2	5147.12	48.06 AV	54	-5.94	-56.49	-56.66	6.36	-47.20

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

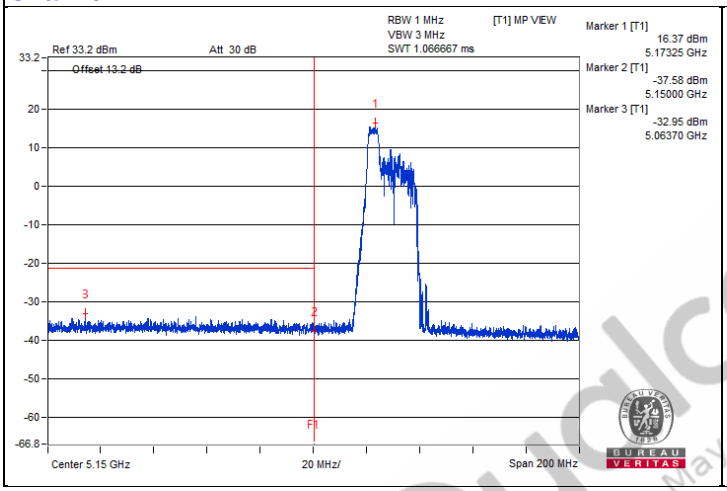

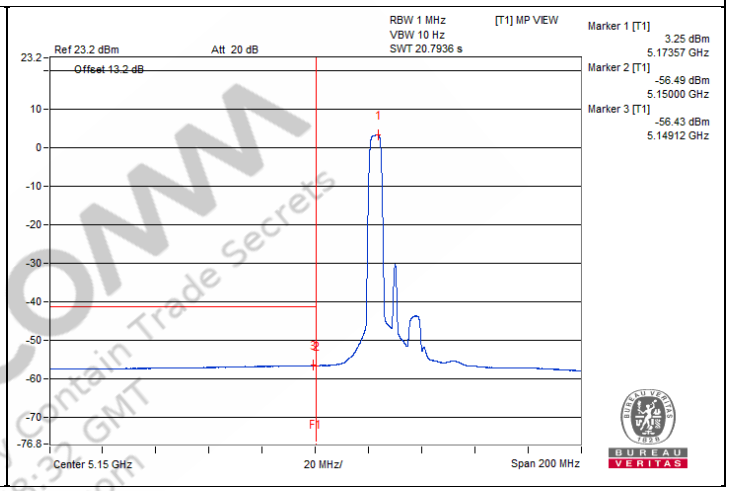

Chain 1

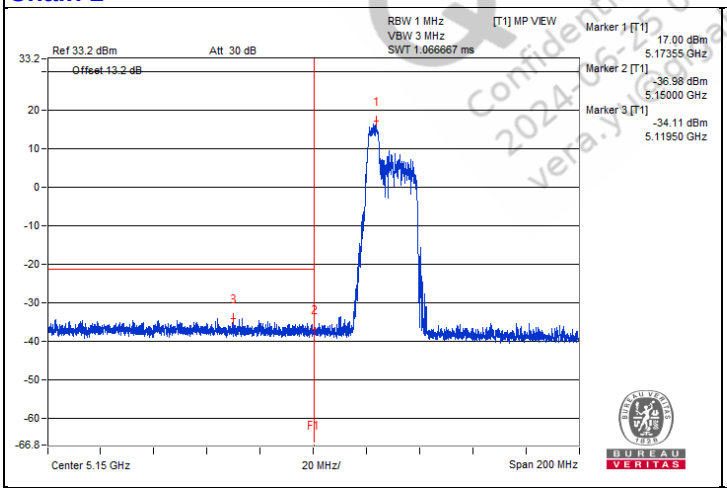

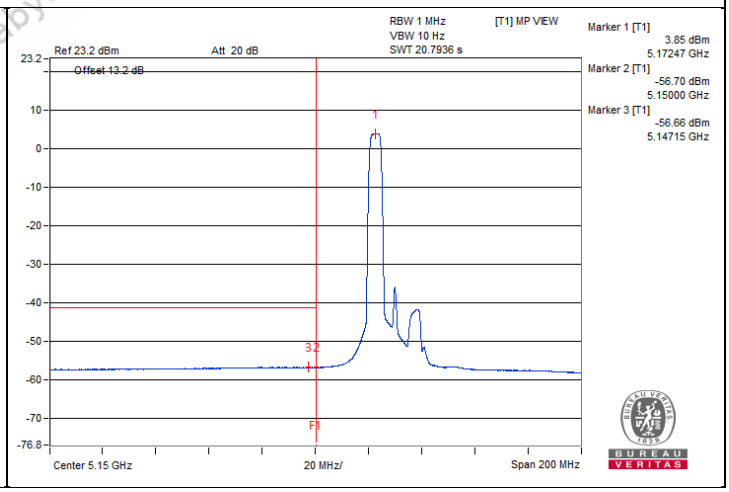

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@compliance.com

802.11be (EHT20) 52-tone RU - Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3471.87	58.39 PK	68.2	-9.81	-49.28	-47.09	8.17	-36.87
2	#6925	58.26 PK	68.2	-9.94	-47.88	-48.51	8.17	-37.00
3	#10387.5	59.32 PK	68.2	-8.88	-48.04	-46.37	8.17	-35.94
4	15590.12	49.72 PK	74	-24.28	-56.08	-57.46	8.17	-45.54
5	15603.06	39.04 AV	54	-14.96	-67.43	-67.38	8.17	-56.22


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

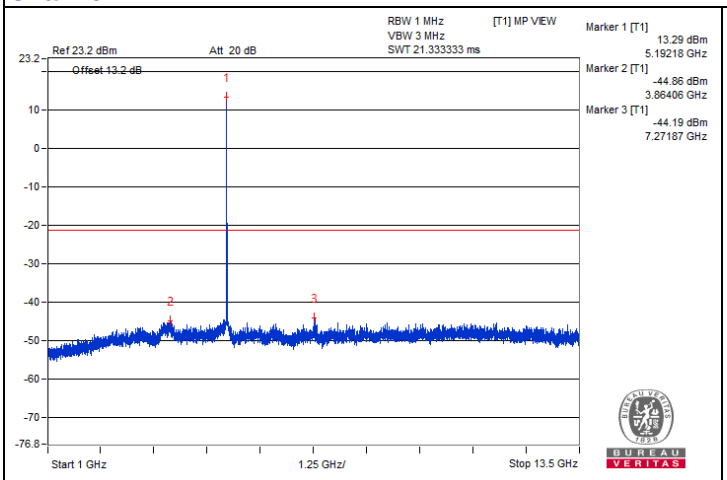


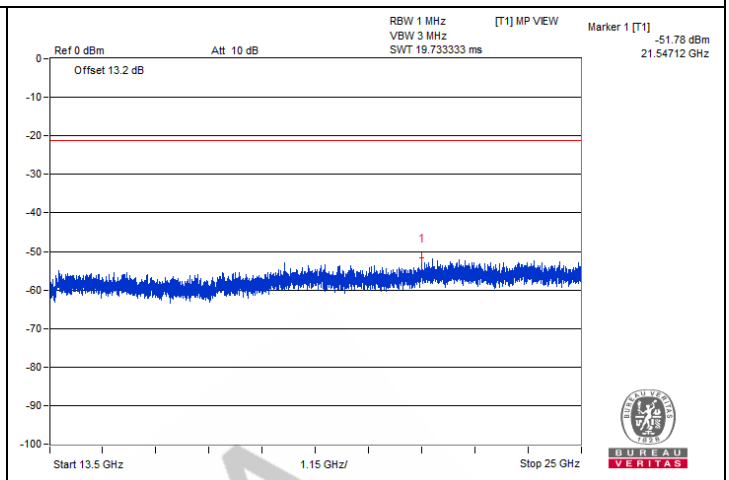

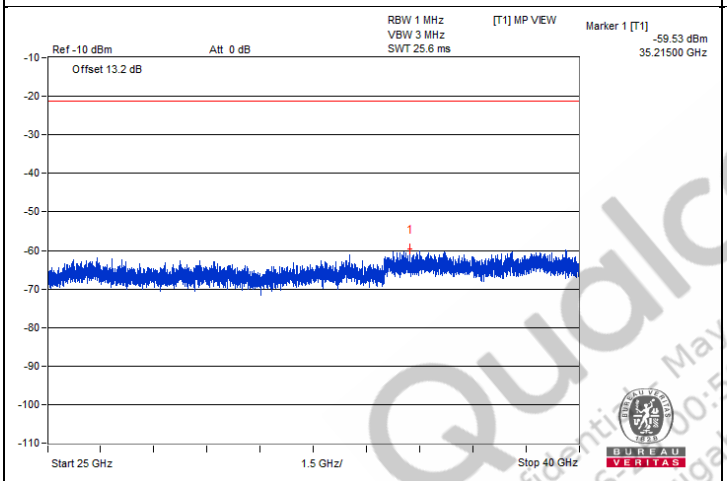

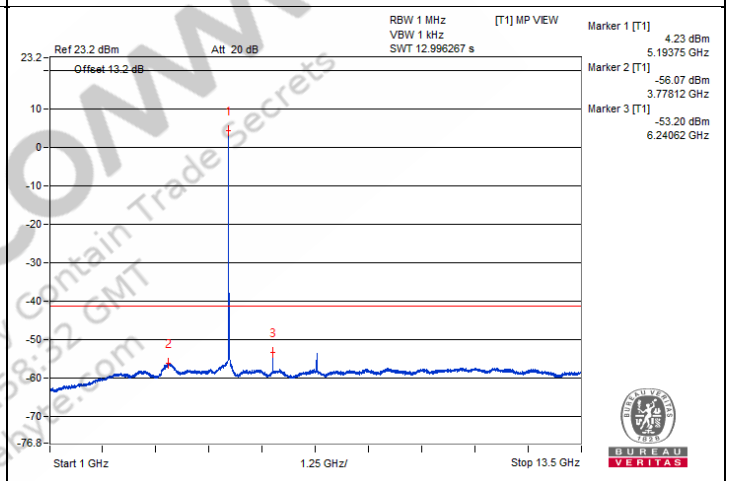


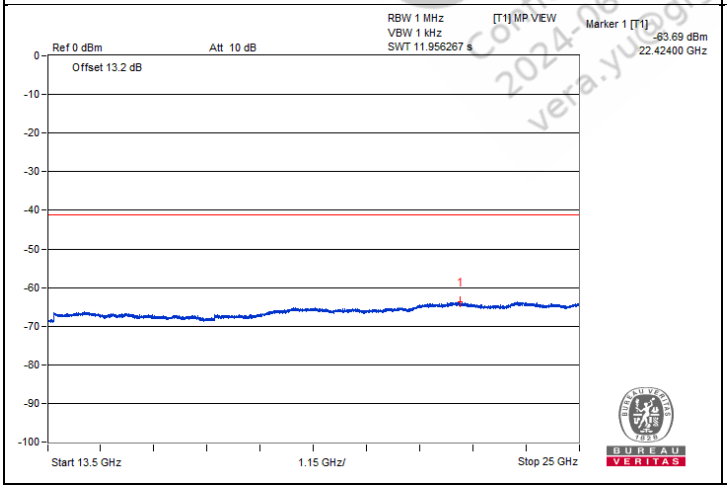


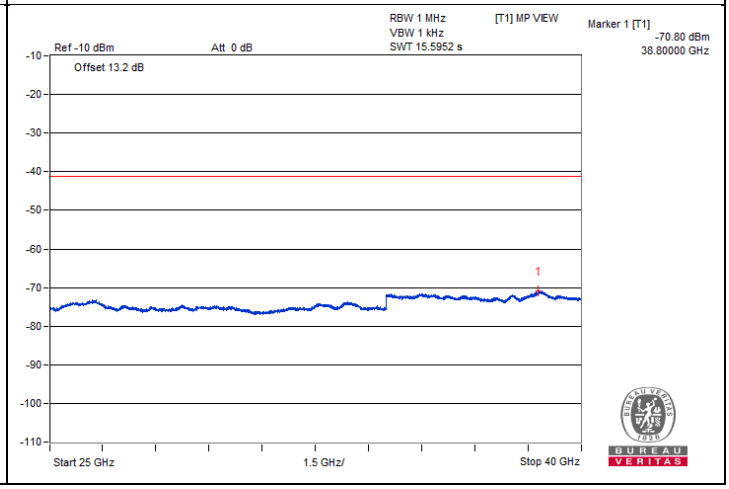



QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Chain 1

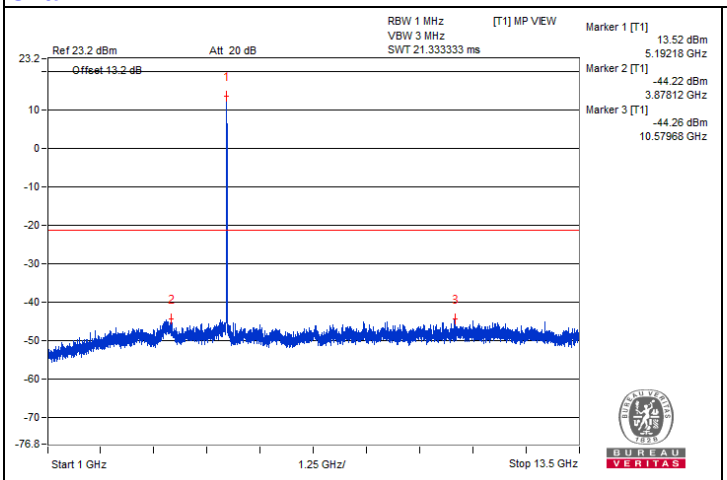


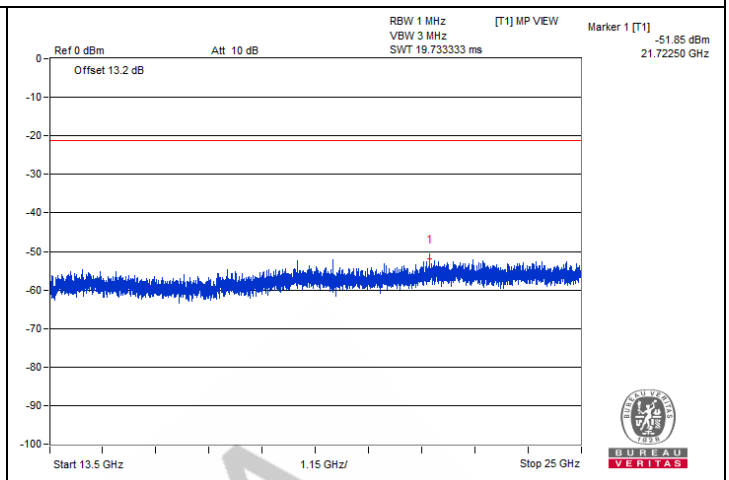

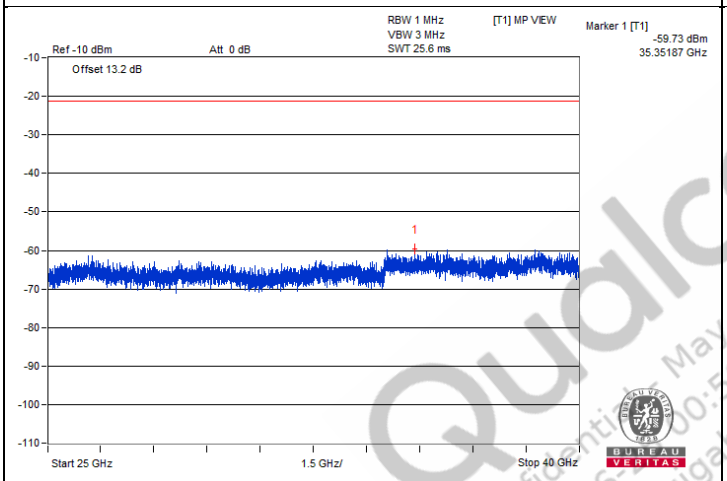

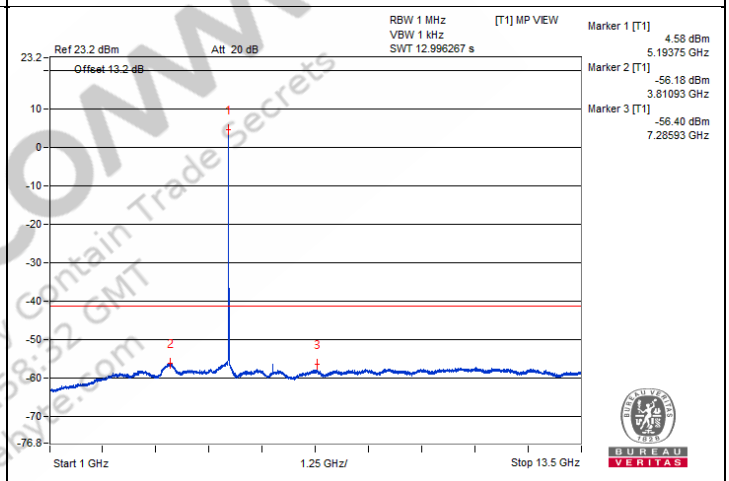

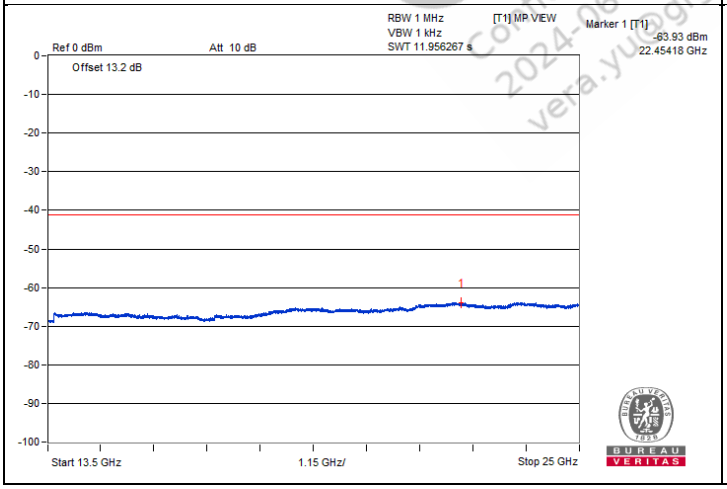

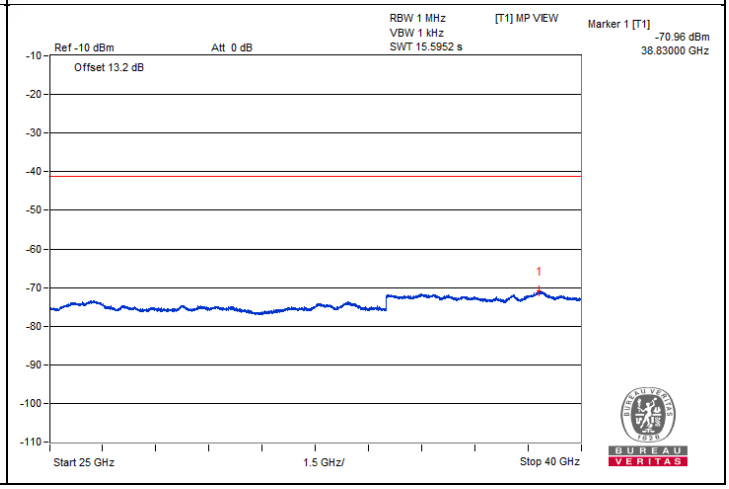

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5067.62	69.63 PK	74	-4.37	-35.76	-34.35	6.36	-25.63
2	5148.45	47.89 AV	54	-6.11	-56.72	-56.77	6.36	-47.37

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

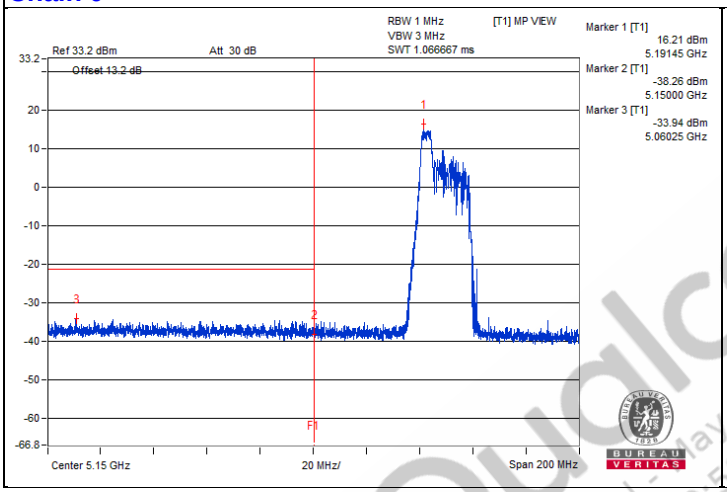

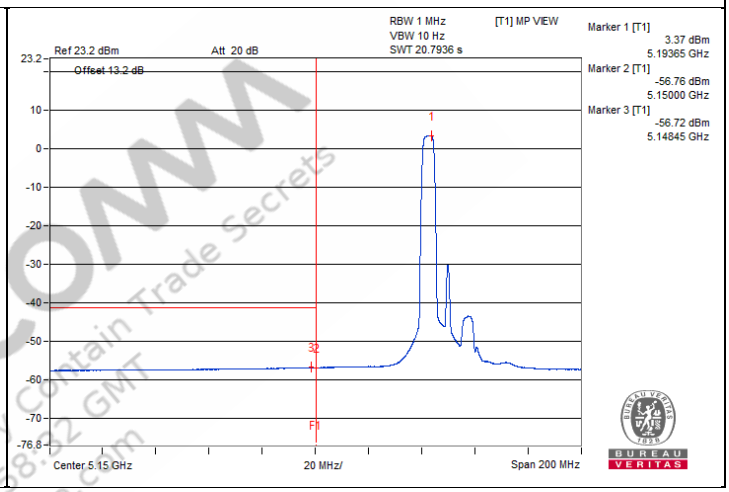

Chain 1

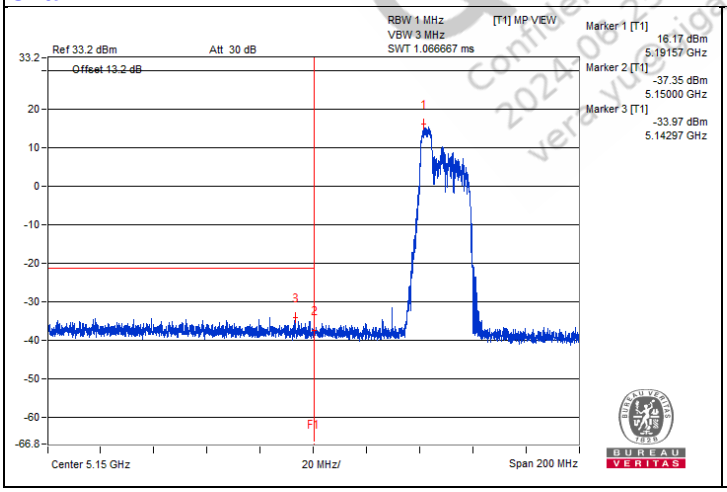

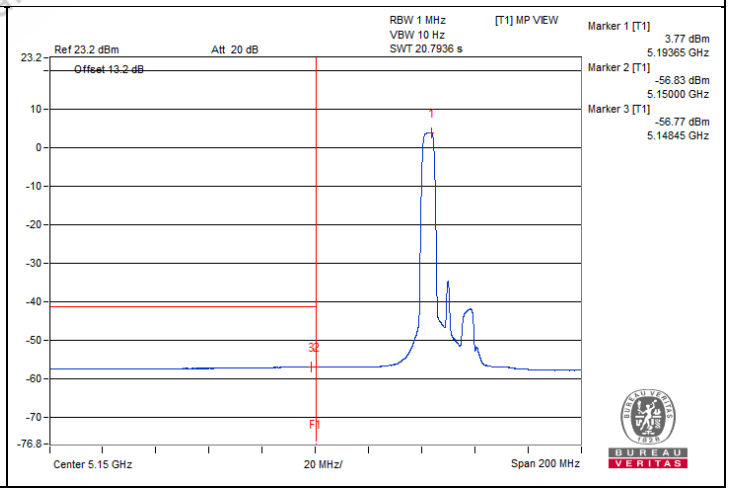

Qualcomm Confidential - May Contain Trade Secrets 2024-08-25 00:58:52 GMT vera.vue@gigabyte.com

802.11be (EHT20) 52-tone RU - Channel 48

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3473.43	57.49 PK	68.2	-10.71	-50.64	-47.74	8.17	-37.77
2	#7006.25	58.89 PK	68.2	-9.31	-49.11	-46.4	8.17	-36.37
3	#10487.5	59.18 PK	68.2	-9.02	-46.78	-47.79	8.17	-36.08
4	15736.75	49.03 PK	74	-24.97	-56.56	-58.48	8.17	-46.23
5	15706.56	39.09 AV	54	-14.91	-67.37	-67.34	8.17	-56.17


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

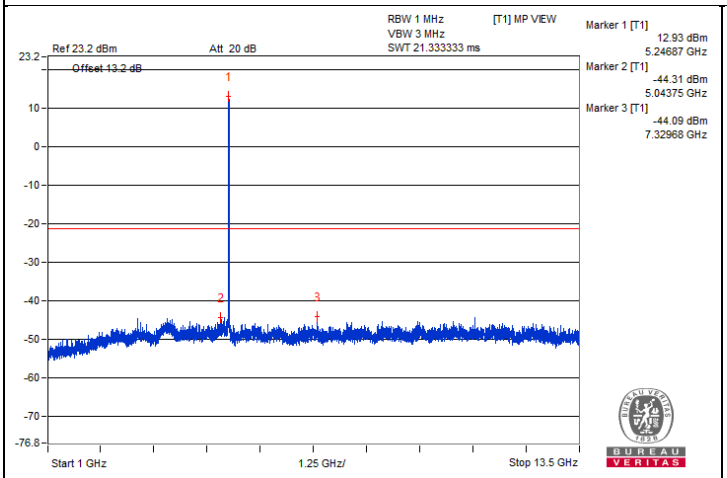


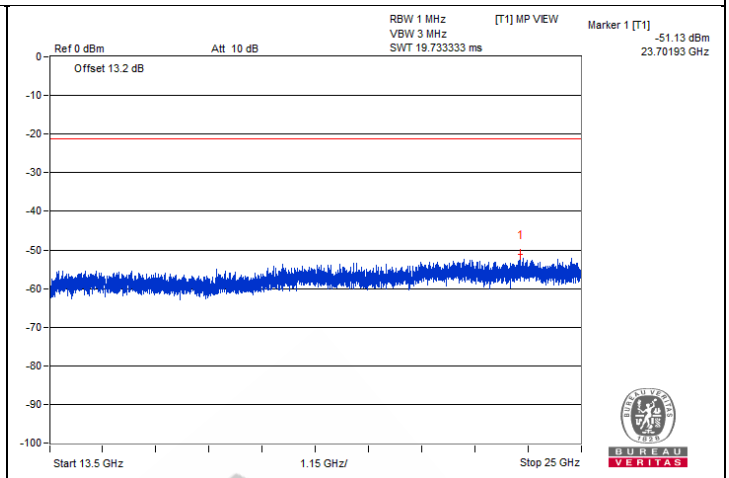

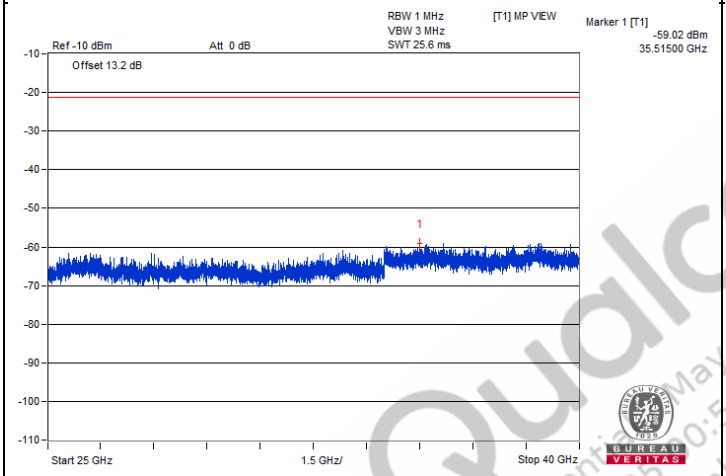

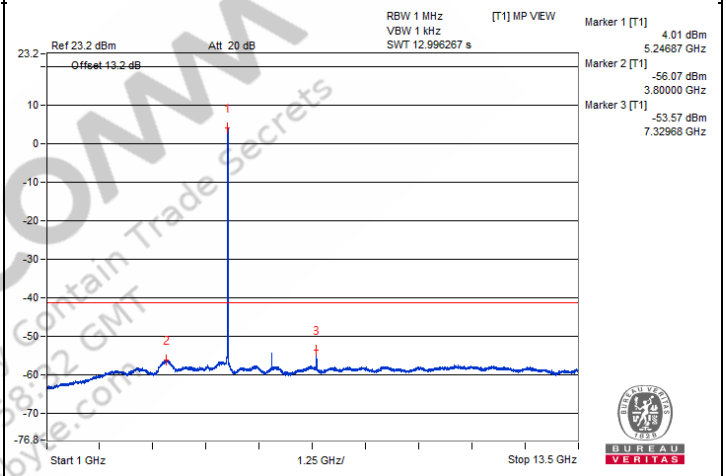


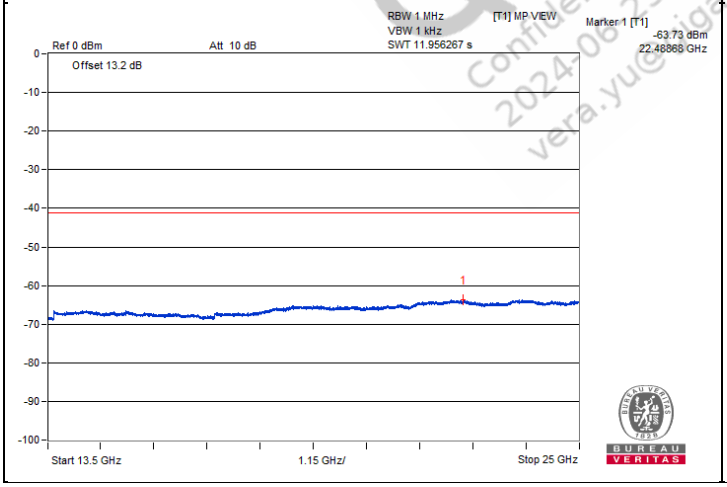


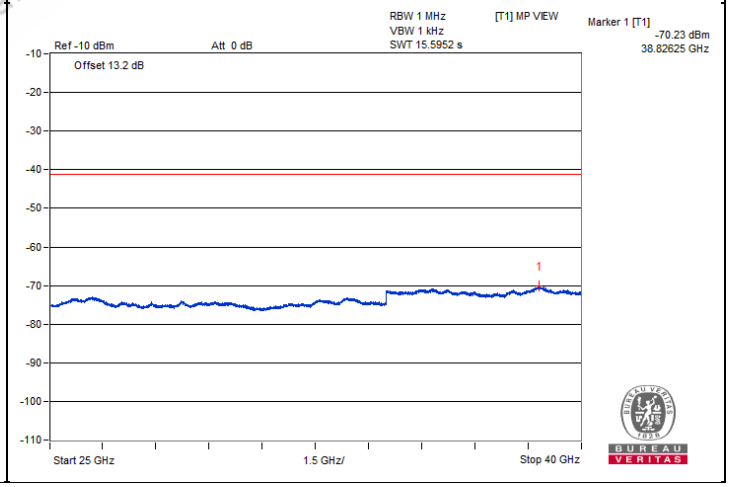



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:02 GMT
vera.yue@gigabyte.com


Chain 1

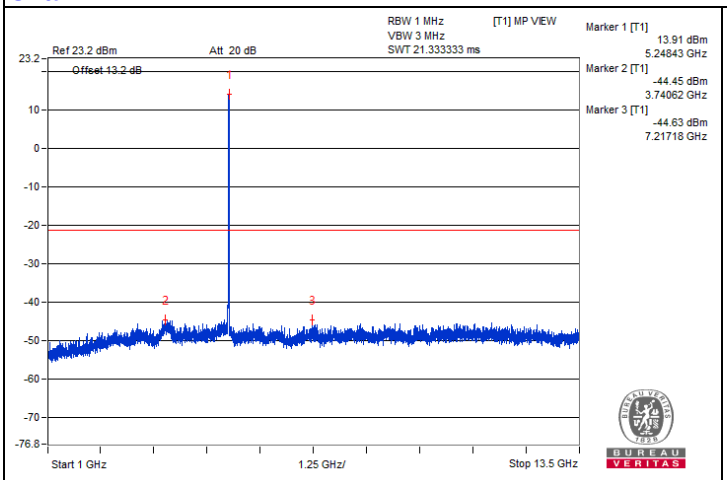


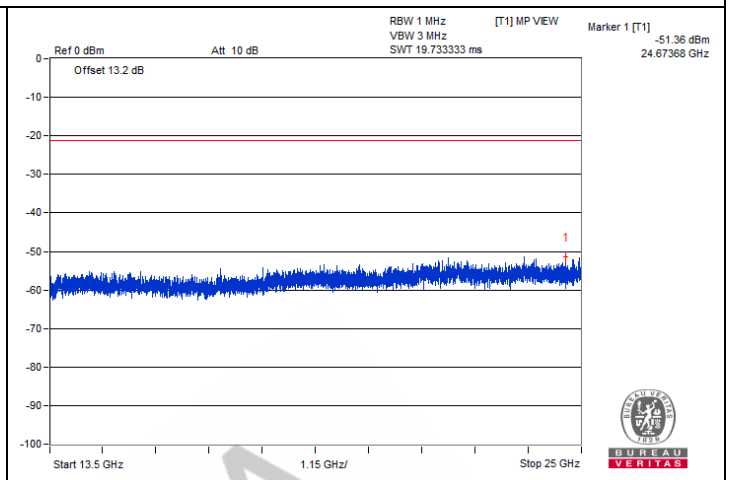

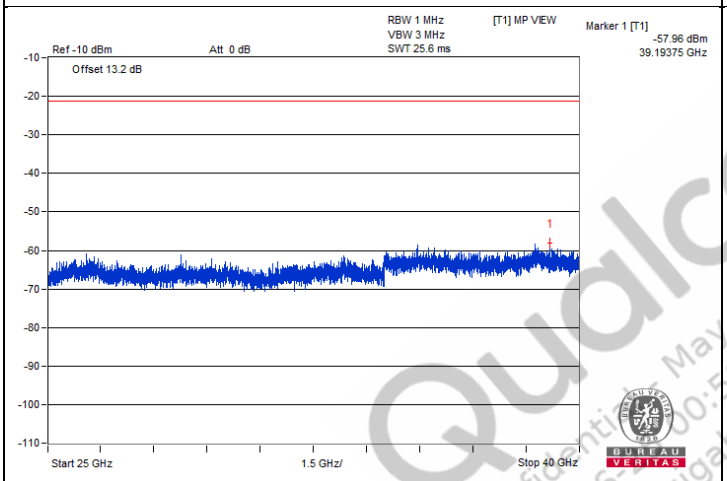

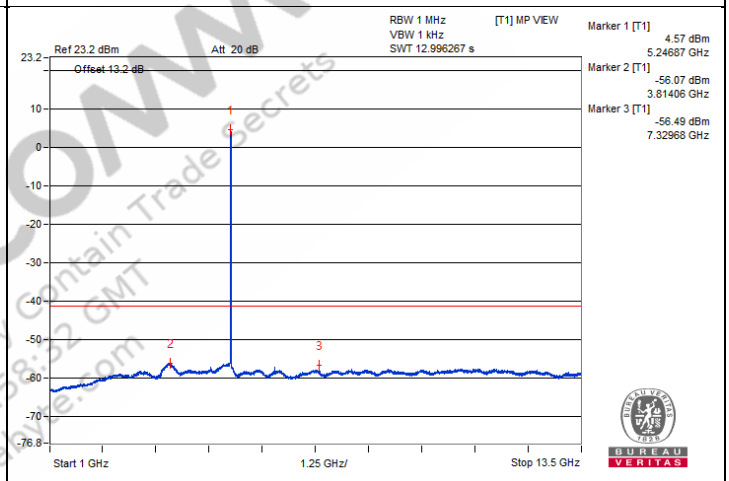

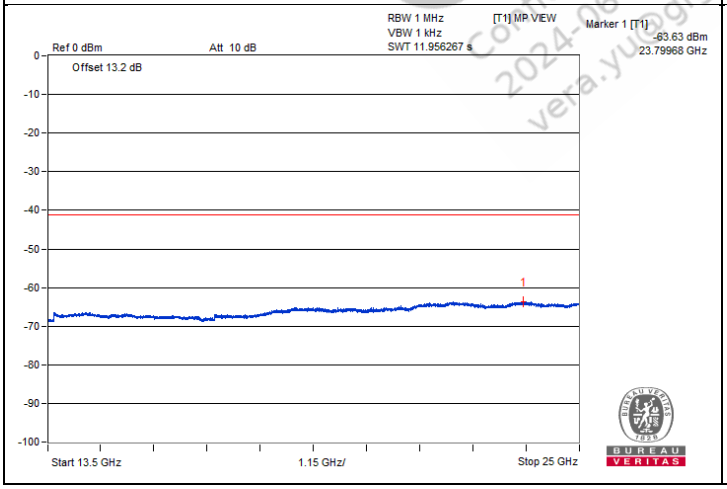

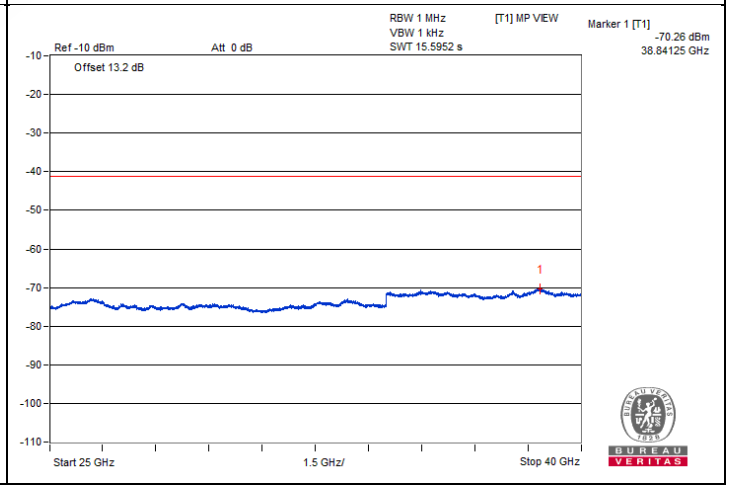

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5057.25	69.33 PK	74	-4.67	-36.49	-34.36	6.36	-25.93
2	5058.37	47.1 AV	54	-6.9	-57.65	-57.42	6.36	-48.16

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

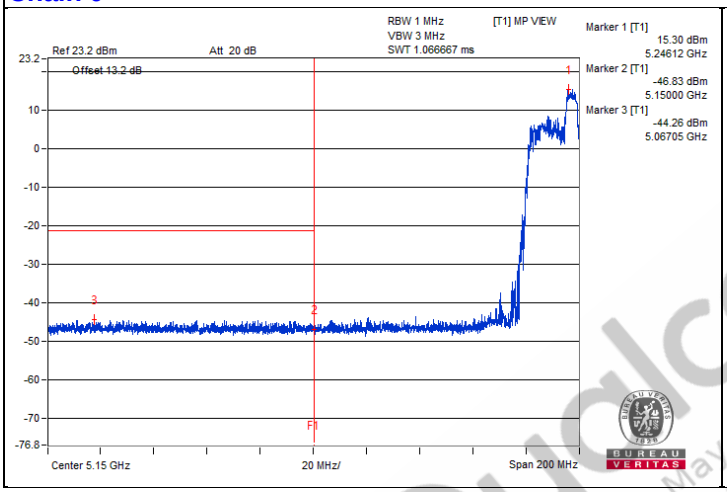

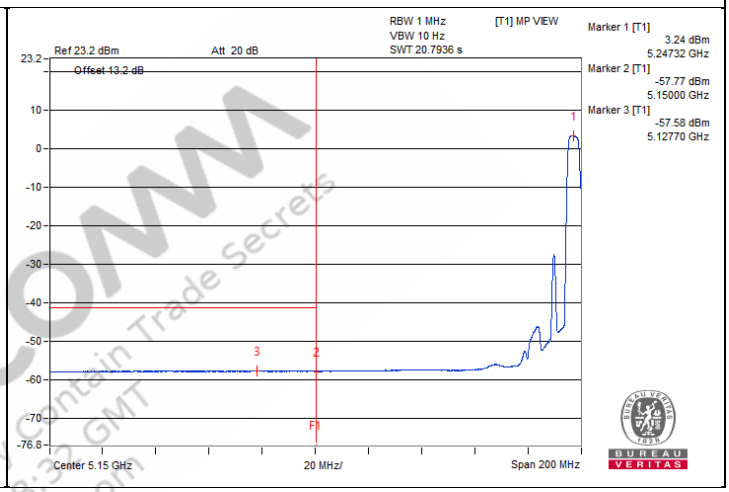

Chain 1

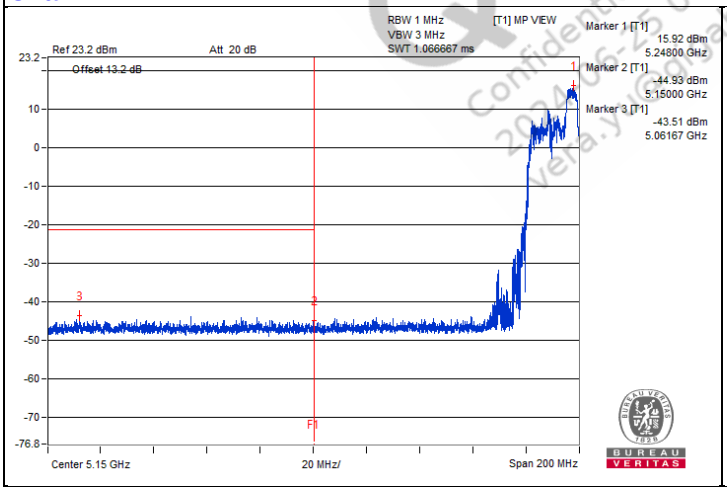

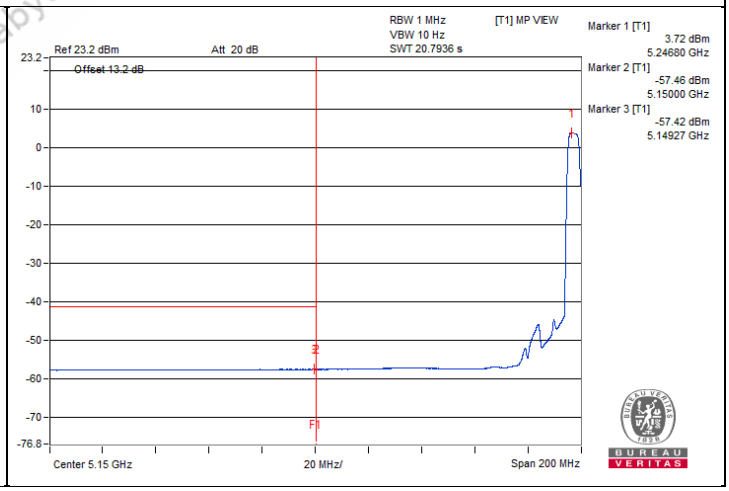

Qualcomm Confidential - May contain Trade Secrets 2024-06-25 00:58:32 GMT Vera.yu@cnbeyte.com

802.11be (EHT20) 52-tone RU - Channel 52

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3498.43	57.35 PK	68.2	-10.85	-48.53	-49.73	8.17	-37.91
2	#7032.81	58.45 PK	68.2	-9.75	-48.77	-47.33	8.17	-36.81
3	#10506.25	59.09 PK	68.2	-9.11	-47.23	-47.47	8.17	-36.17
4	15797.12	48.44 PK	74	-25.56	-56.81	-59.64	8.17	-46.82
5	15785.62	38.85 AV	54	-15.15	-67.38	-67.82	8.17	-56.41


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

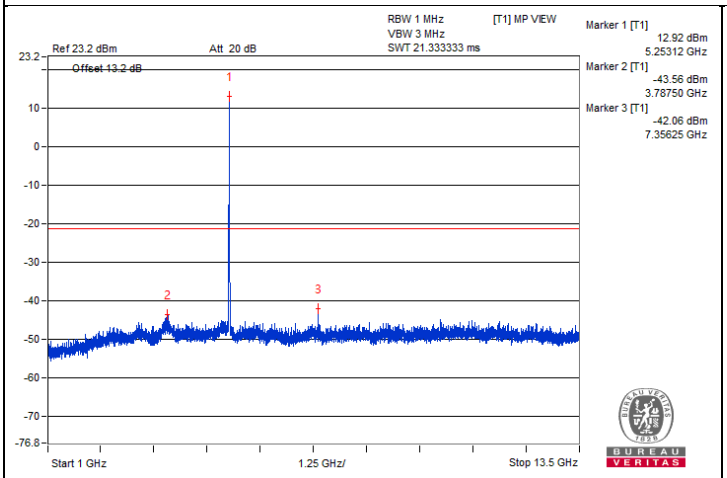


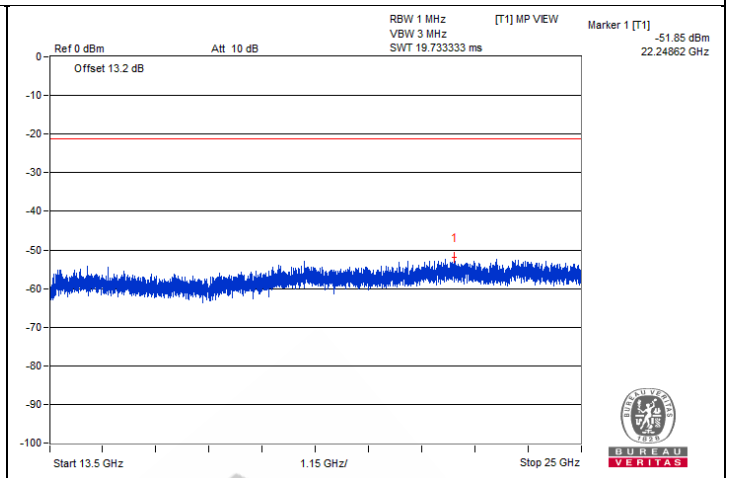

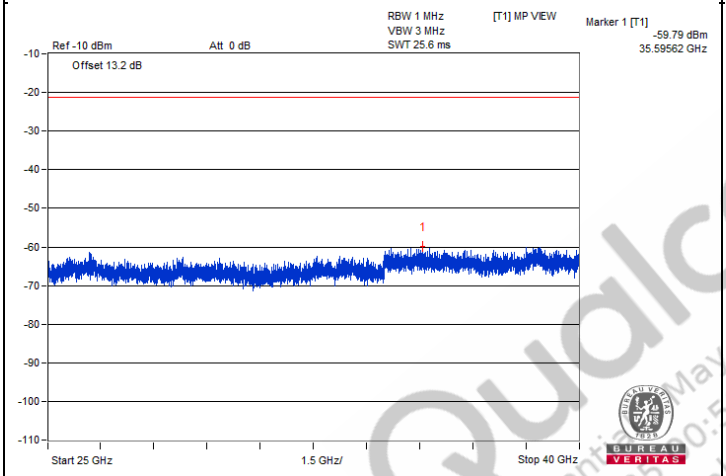

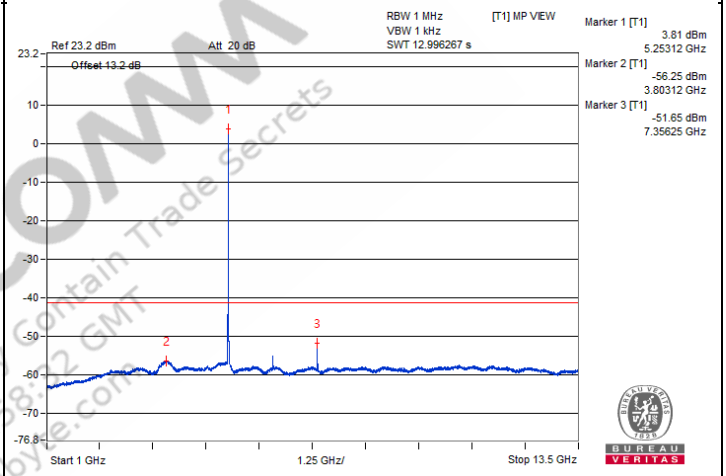


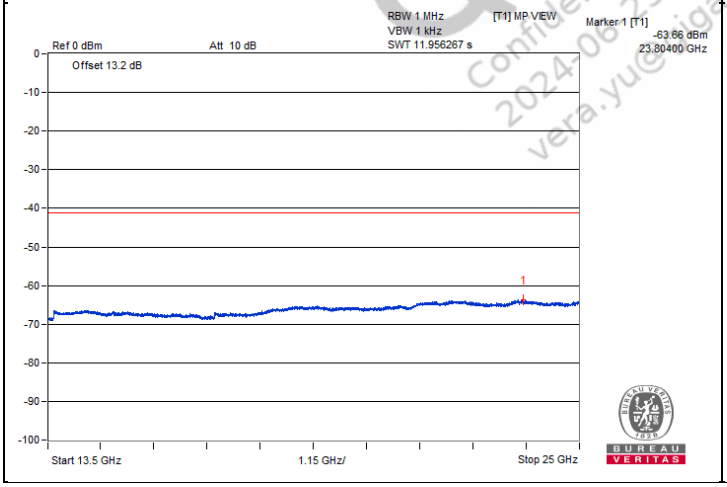


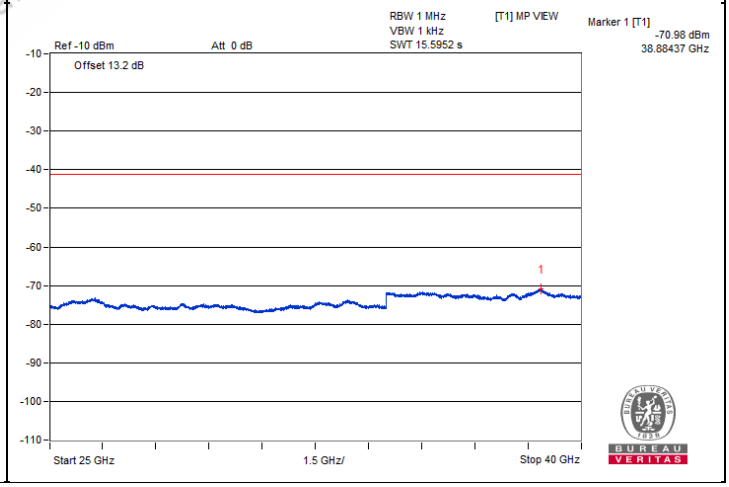



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

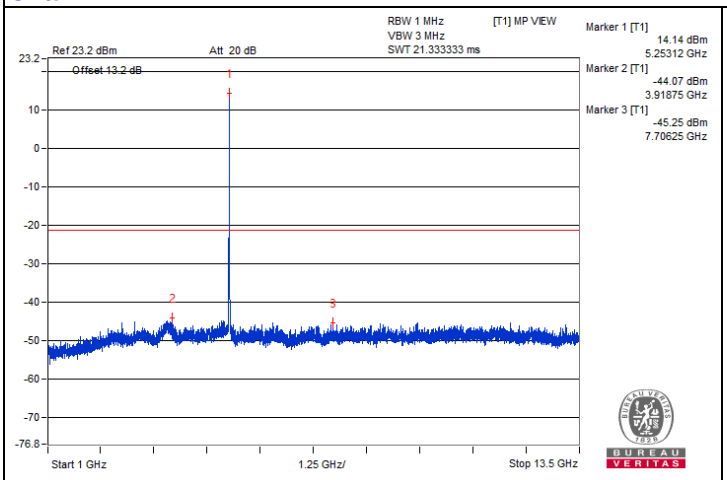


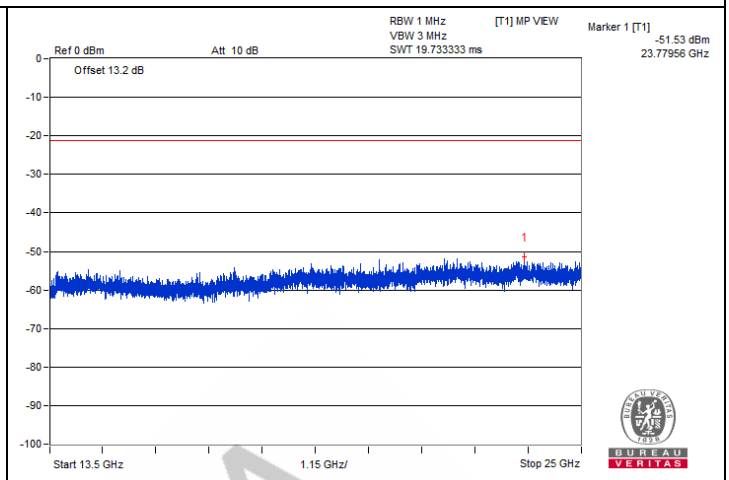

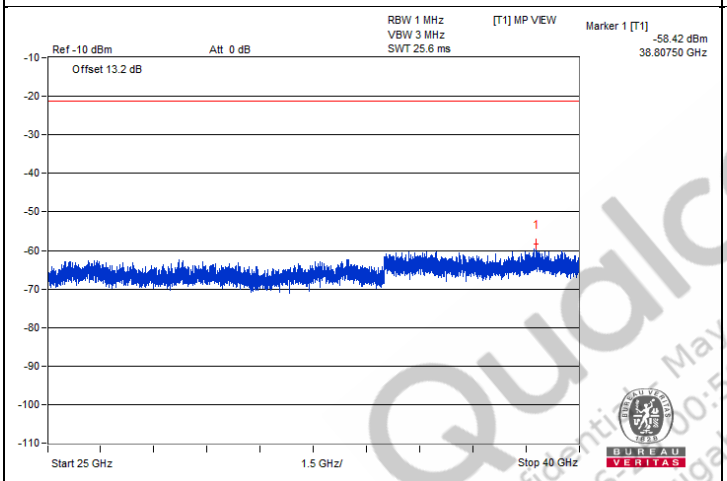

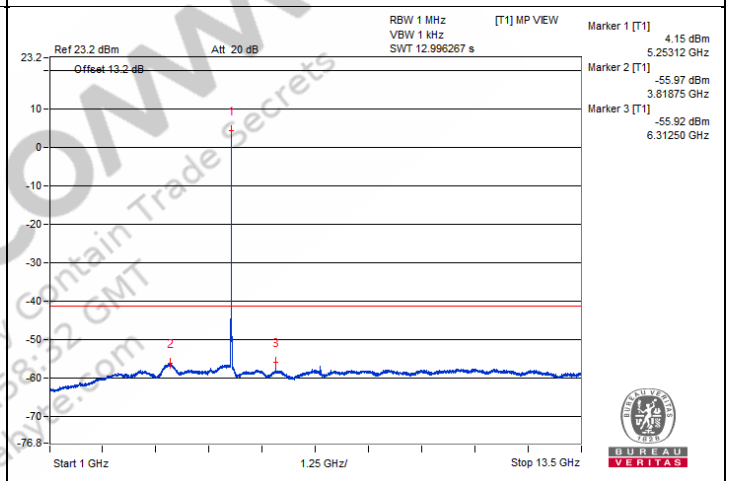

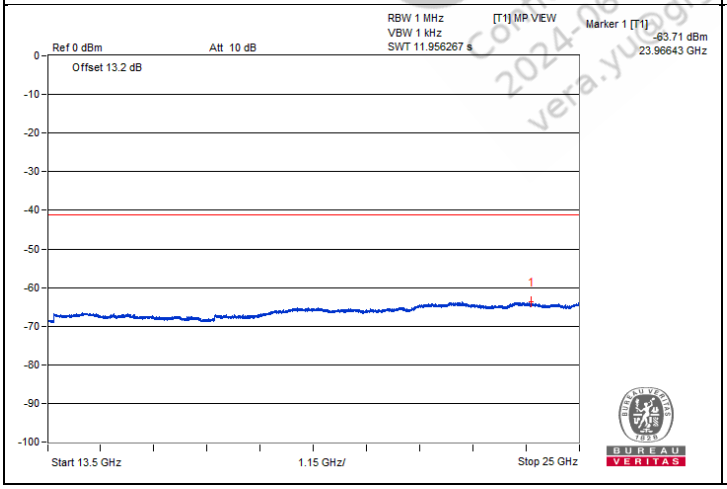

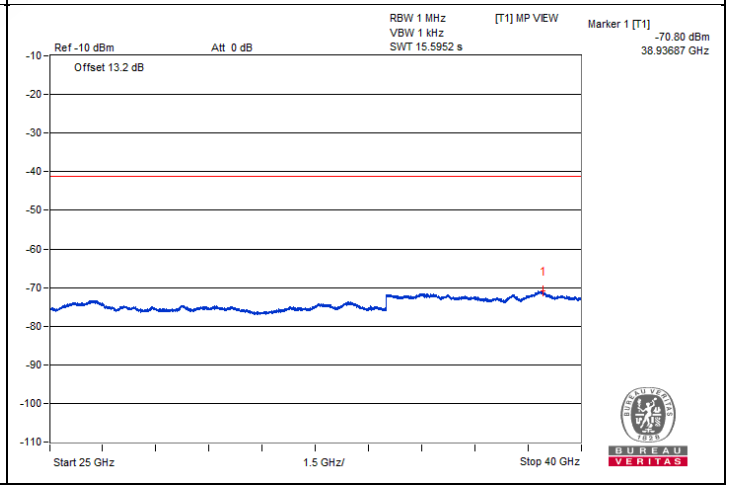

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5382.77	67.33 PK	74	-6.67	-36.75	-38.1	6.43	-27.93
2	5351.97	45.68 AV	54	-8.32	-58.93	-59.11	6.43	-49.58

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

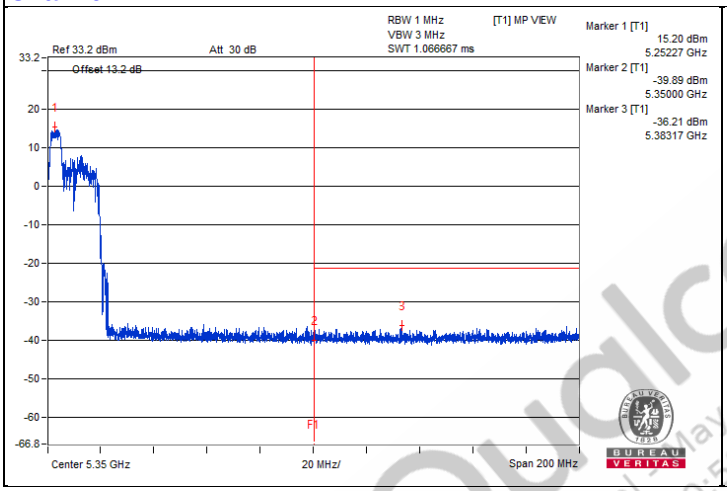

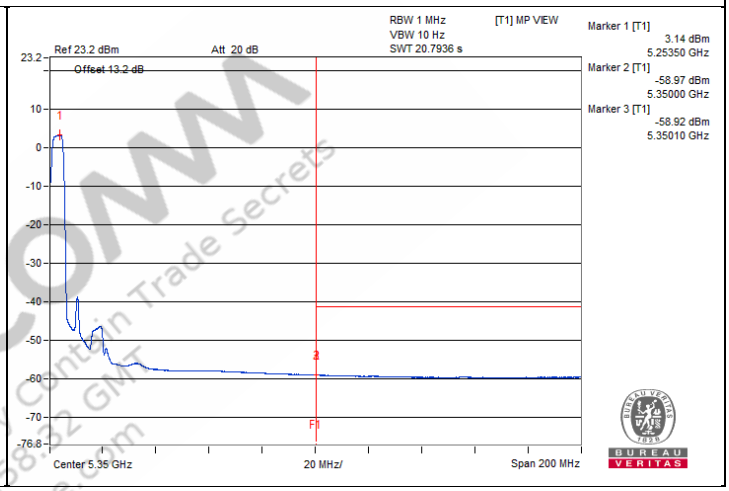

Chain 1

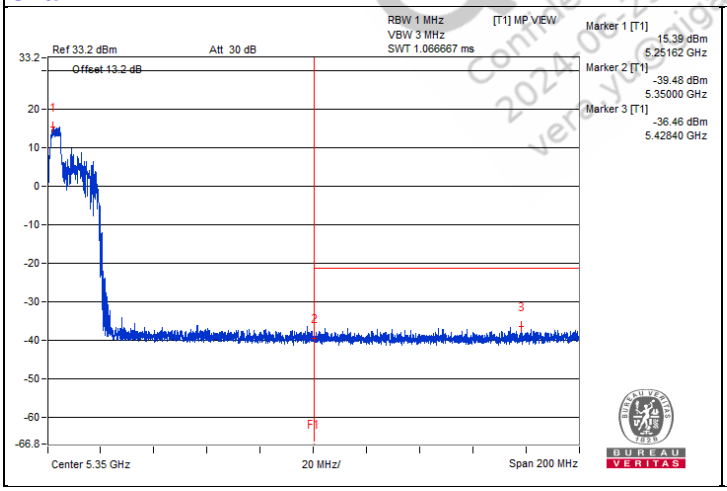

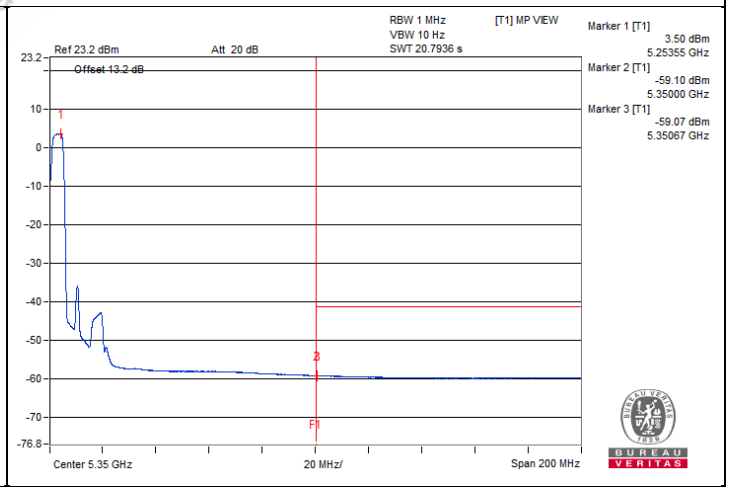

Qualcomm Confidential and Proprietary Contain Trade Secrets 2024-06-25 00:58:32 GMT very yu@gigabyte.com

802.11be (EHT20) 52-tone RU - Channel 60

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3550	58.18 PK	74	-15.82	-48.37	-48.15	8.17	-37.08
2	3548.43	47.26 AV	54	-6.74	-59.23	-59.14	8.17	-48.00
3	#7064.06	58.95 PK	68.2	-9.25	-47.28	-47.72	8.17	-36.31
4	#10596.87	59.51 PK	68.2	-8.69	-45.41	-49.29	8.17	-35.75
5	15890.56	47.97 PK	74	-26.03	-59.4	-57.71	8.17	-47.29
6	15894.87	38.65 AV	54	-15.35	-67.74	-67.84	8.17	-56.61


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

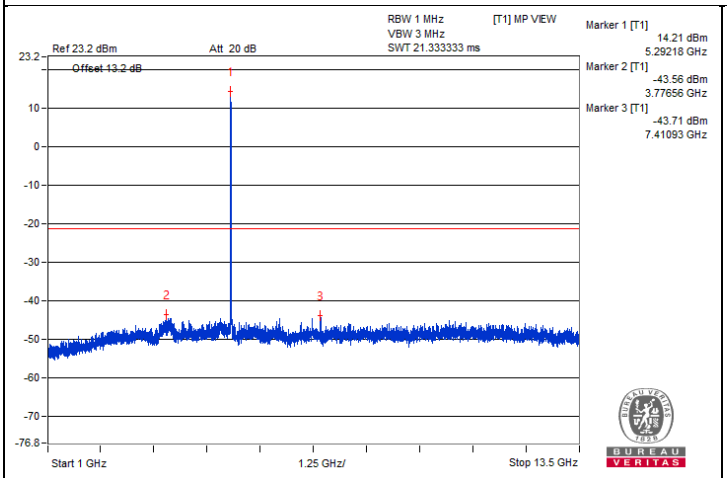


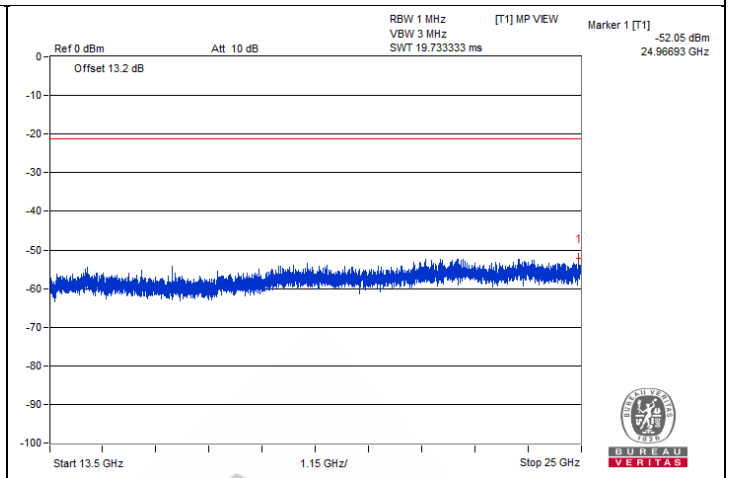

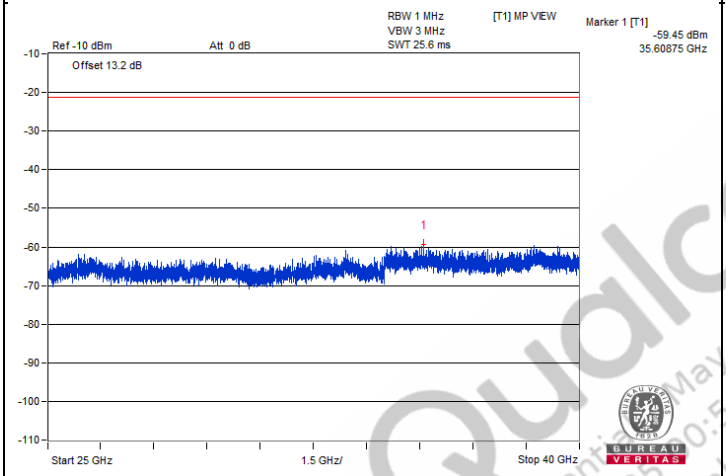

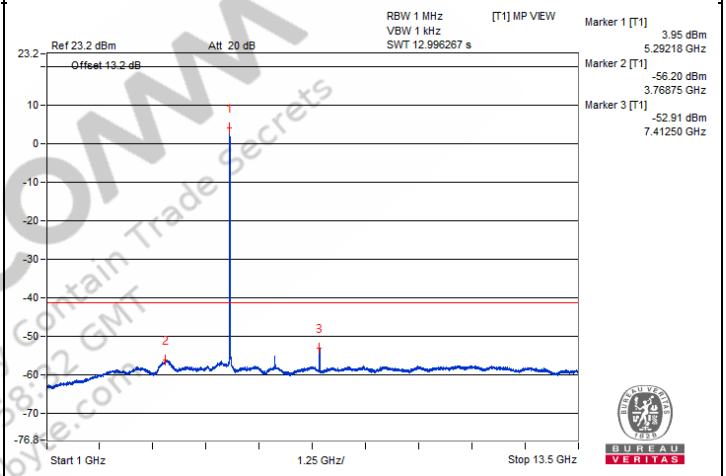


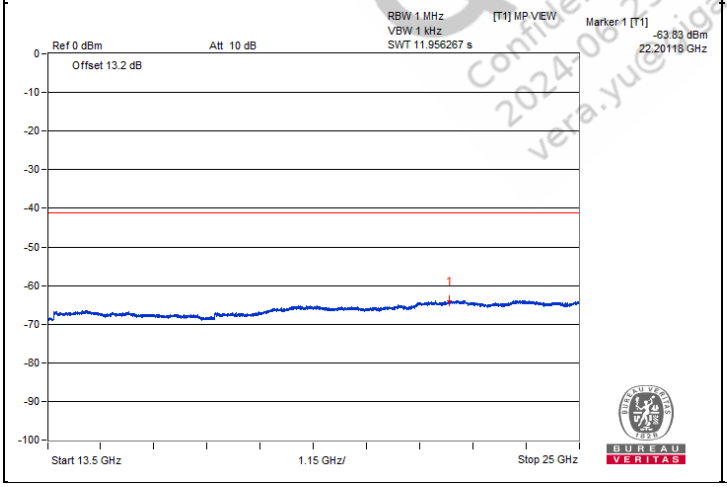


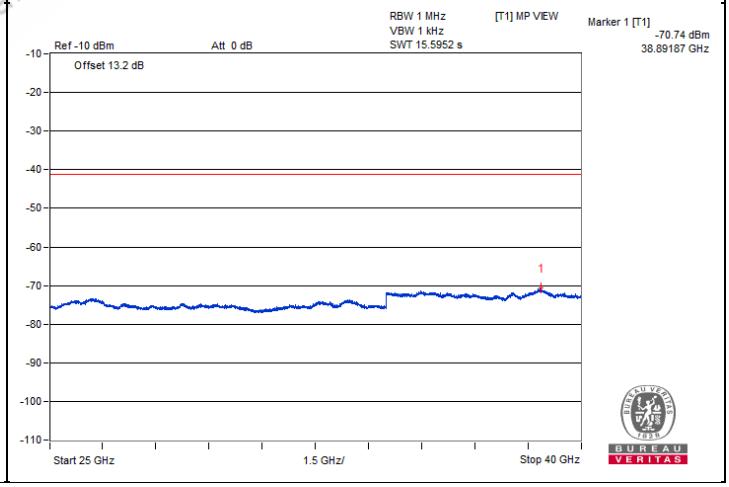



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

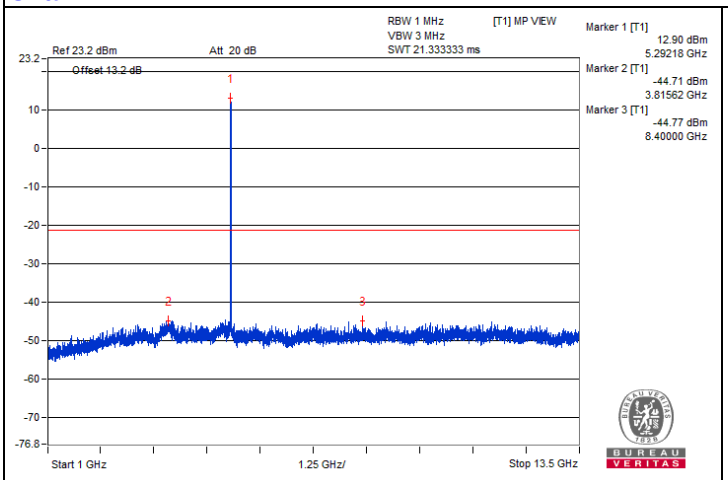


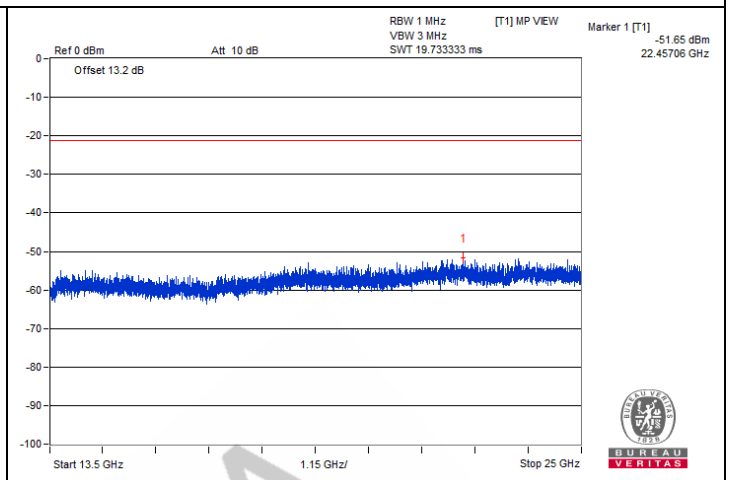

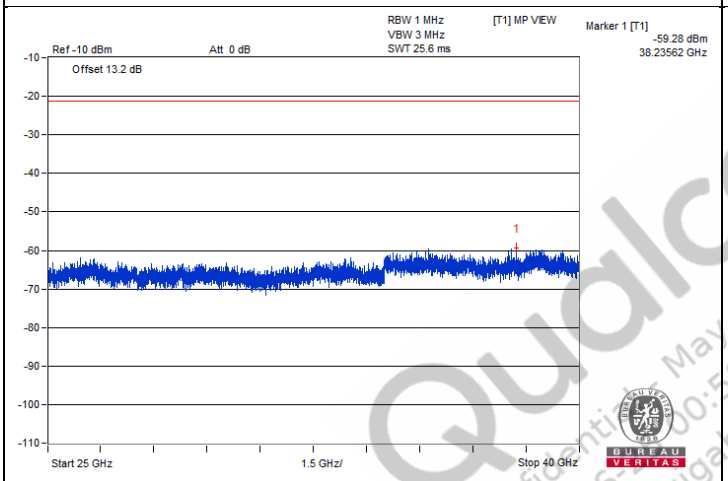

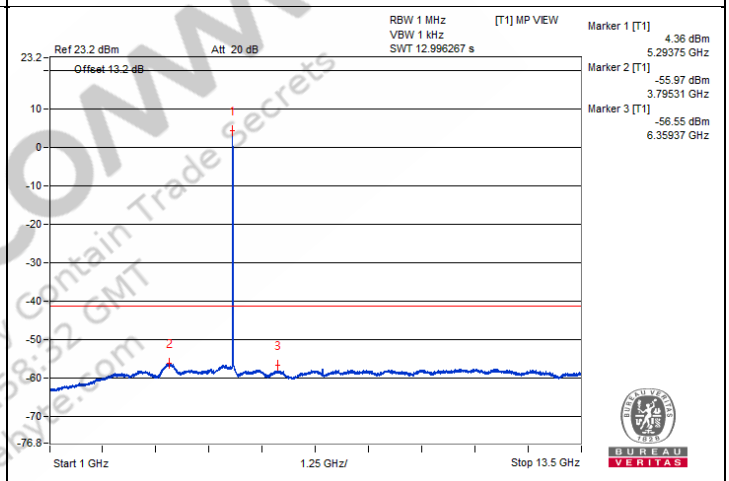

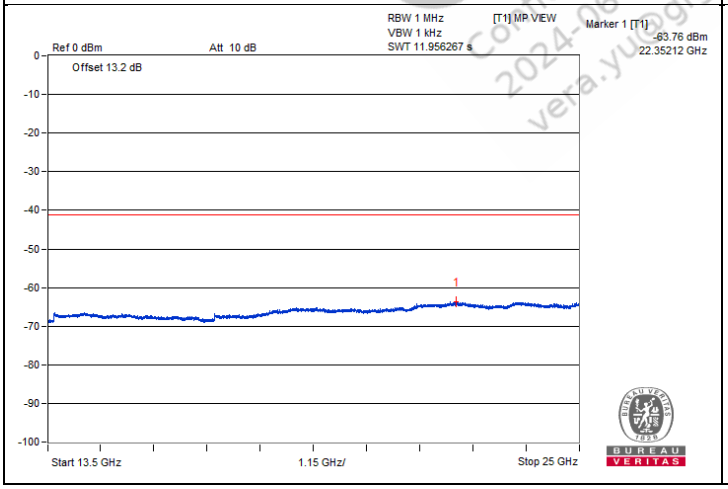

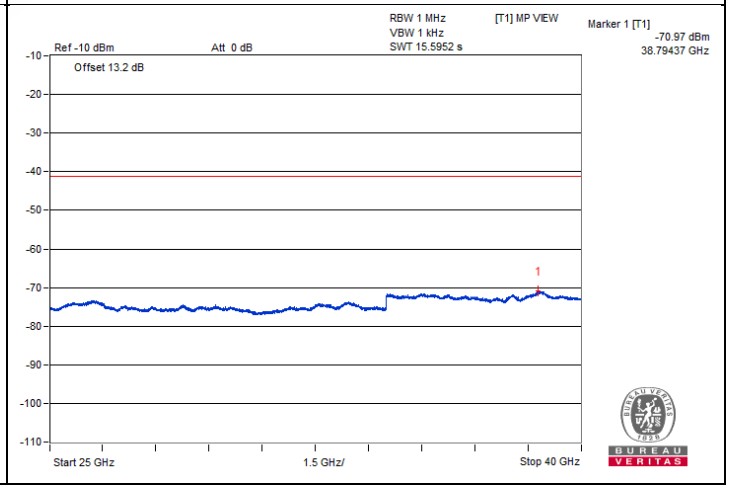

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalive.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5407.82	67.35 PK	74	-6.65	-37.81	-36.94	6.43	-27.91
2	5351.67	46.61 AV	54	-7.39	-57.94	-58.24	6.43	-48.65

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

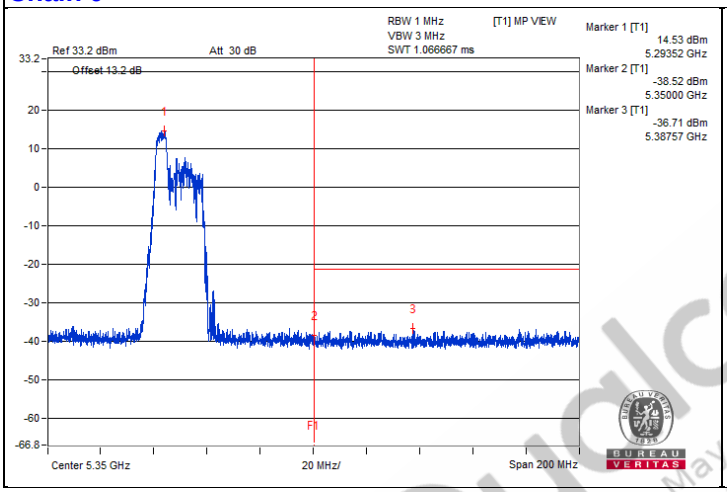

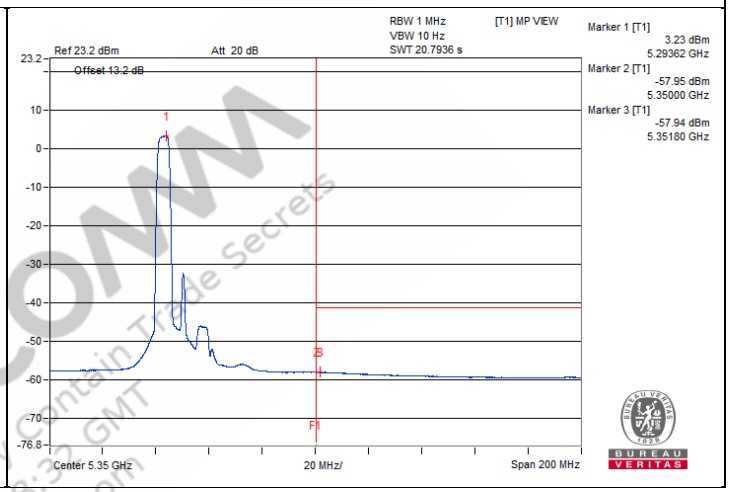

Chain 1

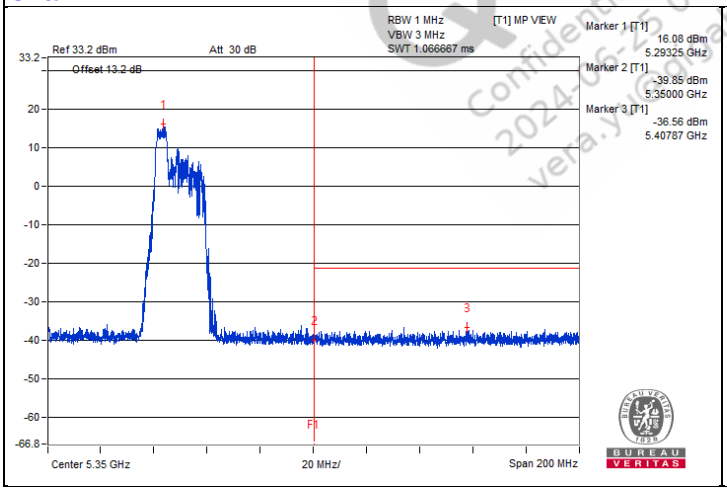

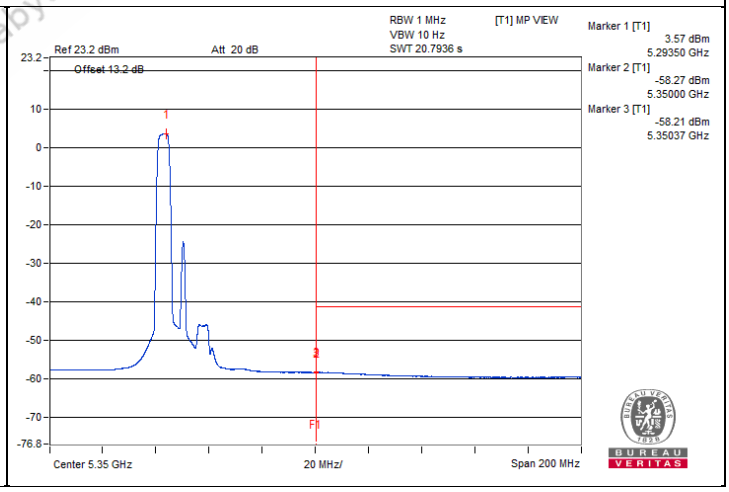

Qualcomm Confidential - May contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@cnbyte.com

802.11be (EHT20) 52-tone RU - Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3556.25	58.16 PK	74	-15.84	-48.51	-48.07	8.17	-37.10
2	3565.62	47.23 AV	54	-6.77	-59.35	-59.08	8.17	-48.03
3	#7104.68	58.84 PK	68.2	-9.36	-47.36	-47.86	8.17	-36.42
4	10625	59.11 PK	74	-14.89	-46.92	-47.79	8.17	-36.15
5	10659.37	48.63 AV	54	-5.37	-57.83	-57.8	8.17	-46.63
6	15965.31	48.76 PK	74	-25.24	-59.3	-56.51	8.17	-46.50
7	15956.68	38.92 AV	54	-15.08	-67.47	-67.58	8.17	-56.34


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

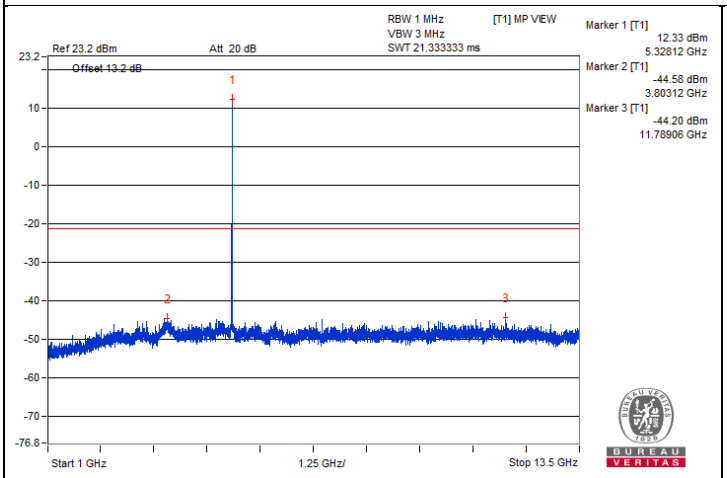


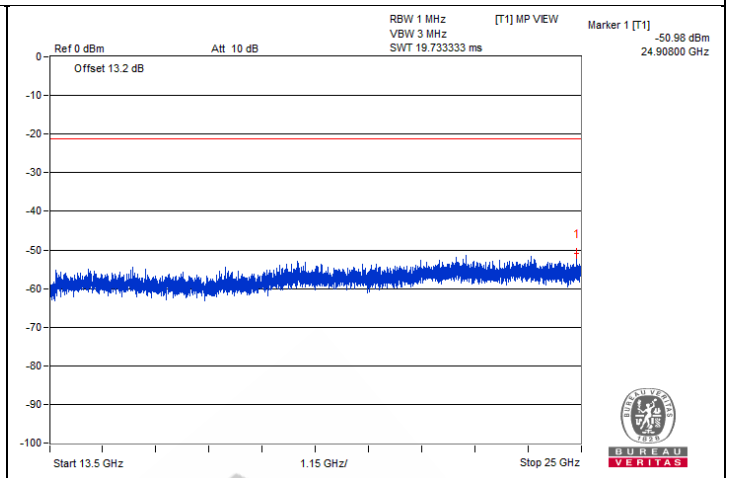

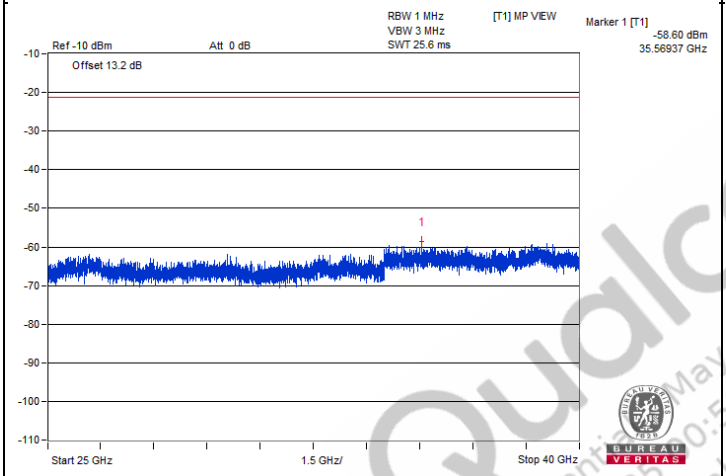

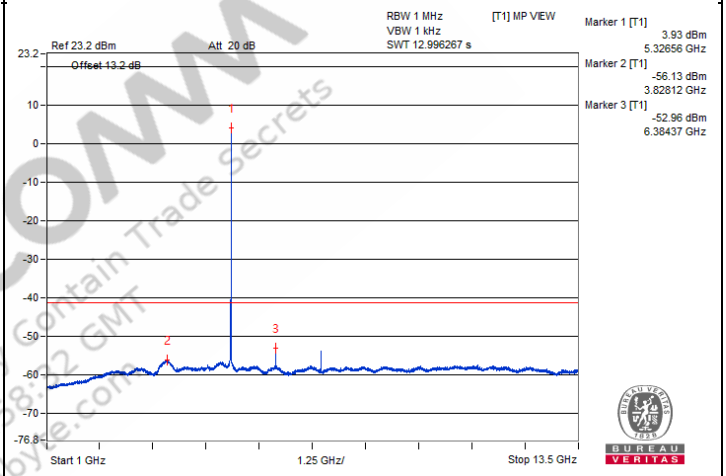


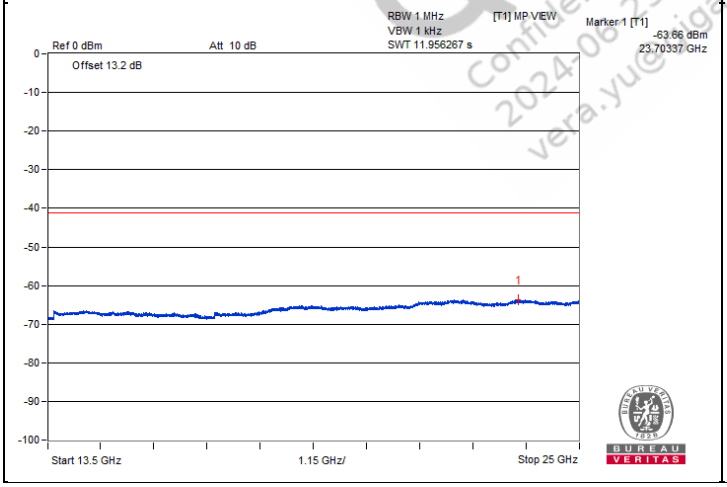


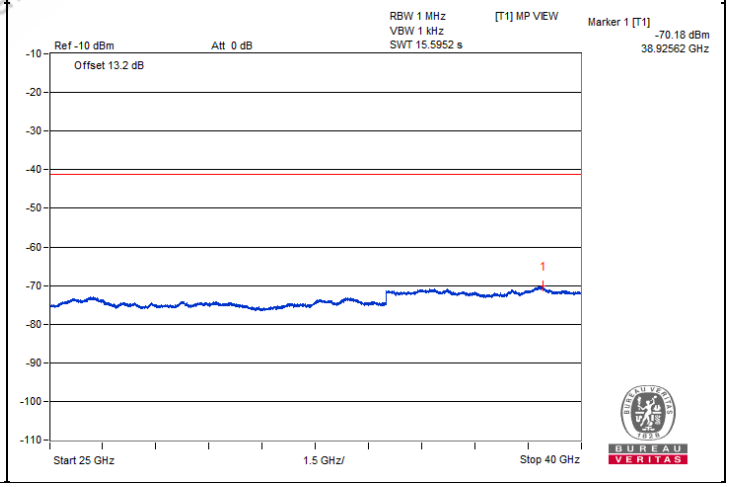



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

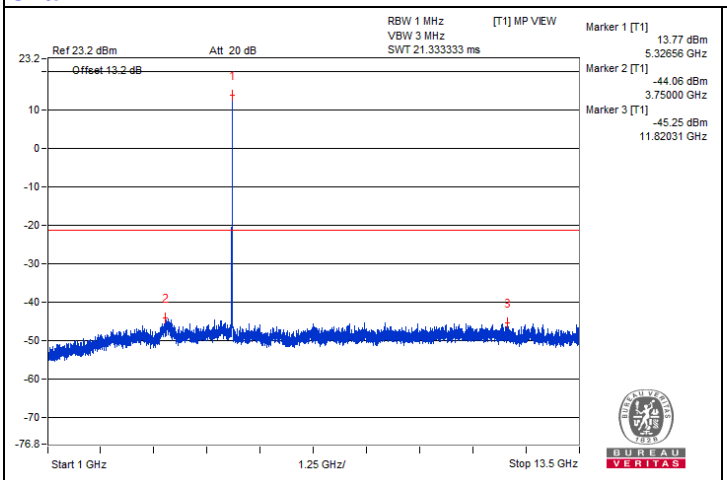


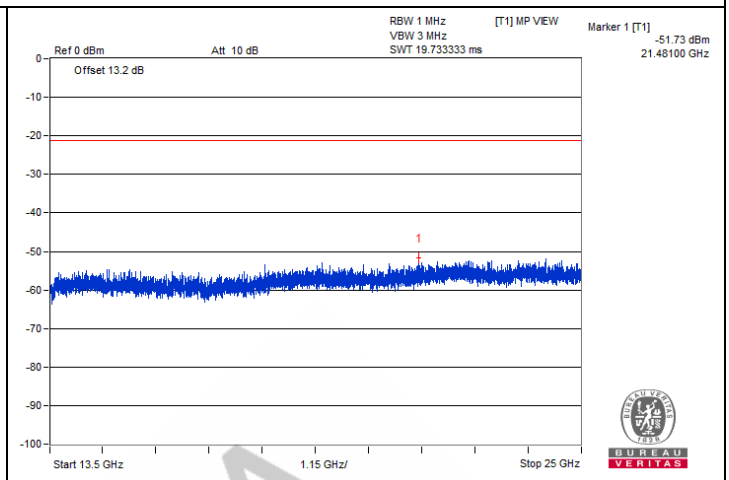

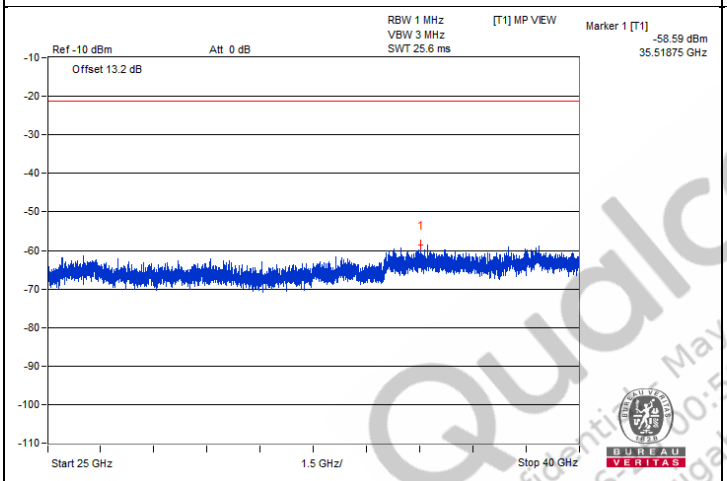

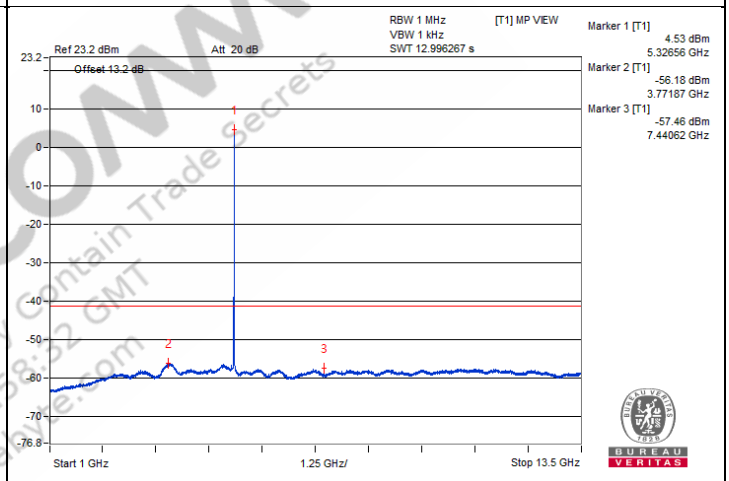

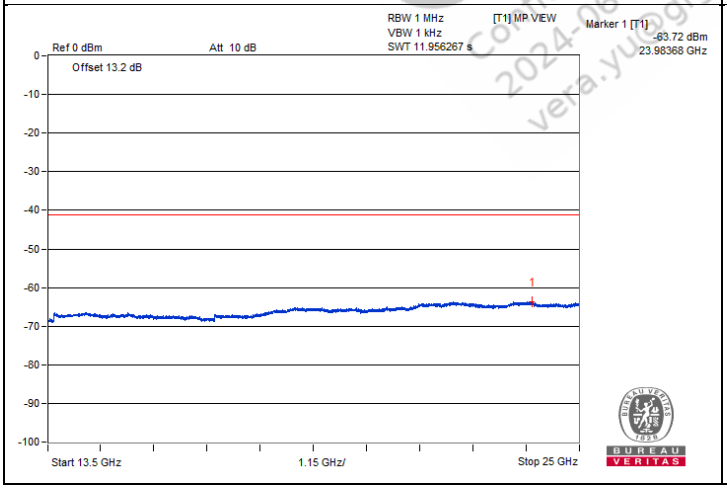

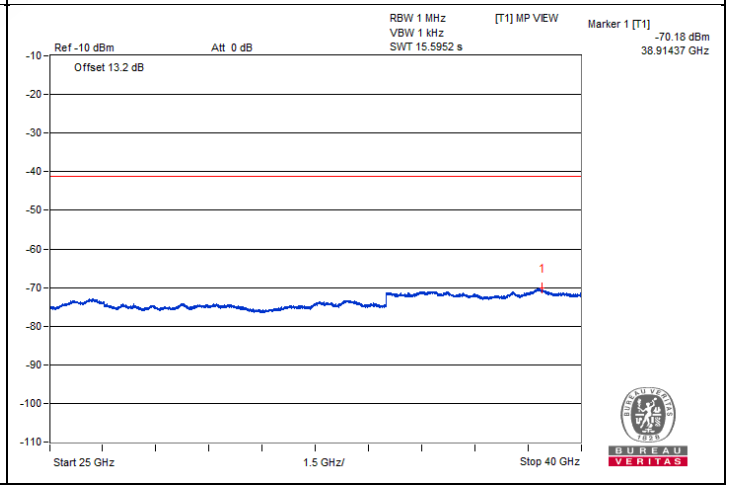

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5376.02	67.6 PK	74	-6.4	-36.76	-37.47	6.43	-27.66
2	5350.85	46.71 AV	54	-7.29	-58.32	-57.68	6.43	-48.55


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

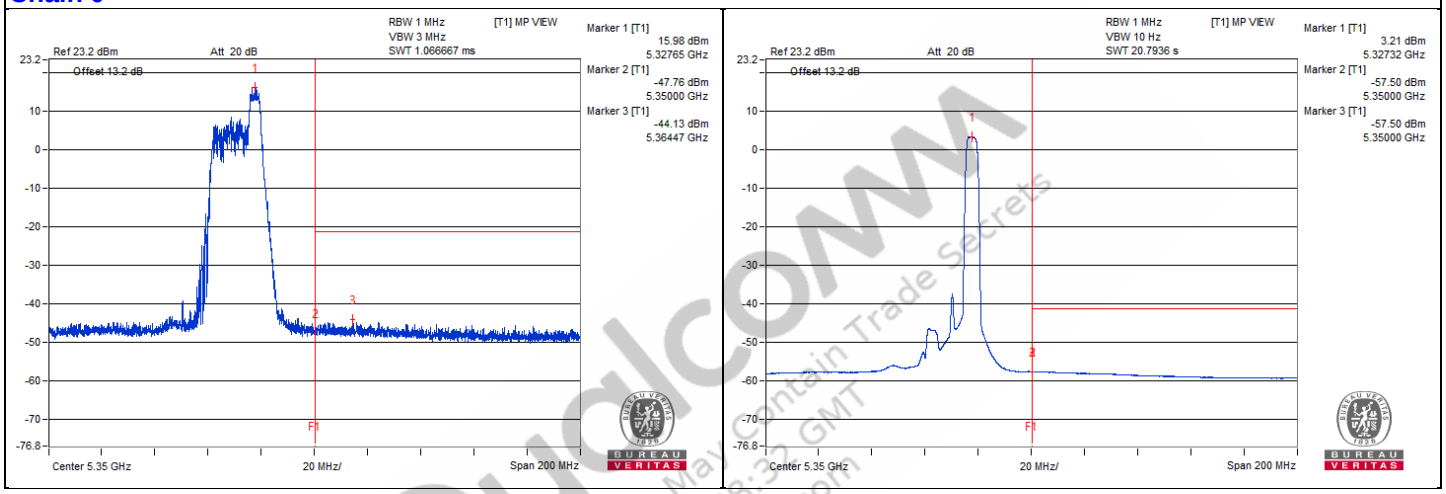

Chain 1

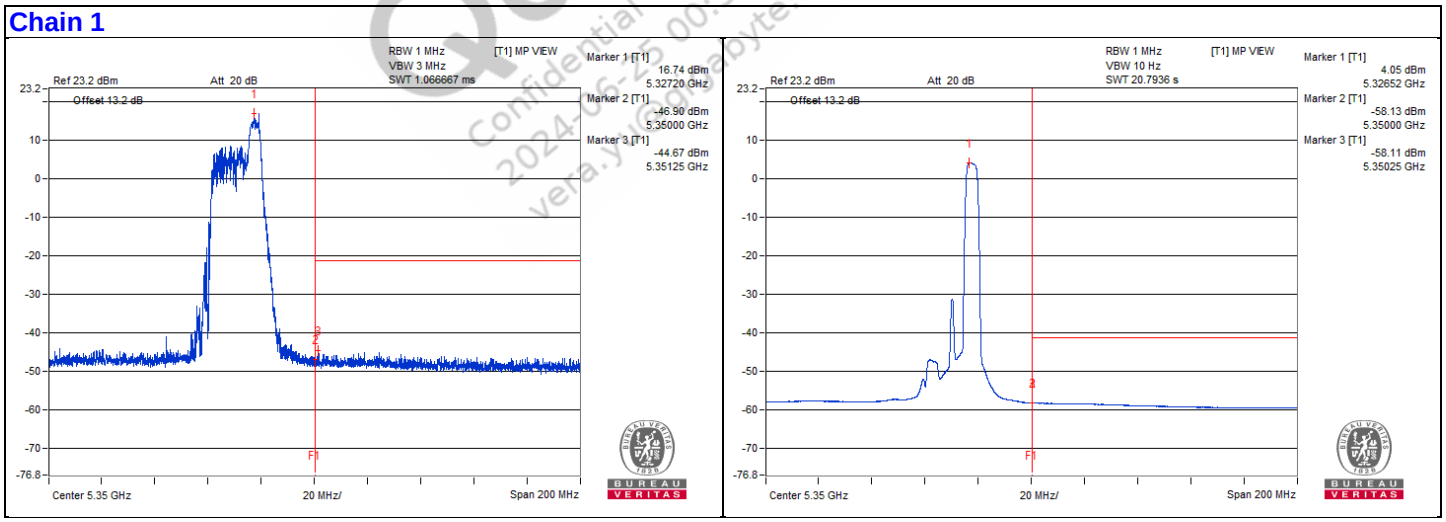

Qualcomm Confidential - May contain Trade Secrets 2024-06-25 00:58:32 GMT vera.y@compliancyte.com

802.11be (EHT20) 52-tone RU - Channel 100

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3685.93	59.77 PK	74	-14.23	-46.24	-47.14	8.17	-35.49
2	3685.93	49.12 AV	54	-4.88	-57.19	-57.45	8.17	-46.14
3	7339.06	59.29 PK	74	-14.71	-48.03	-46.42	8.17	-35.97
4	7340.62	48.08 AV	54	-5.92	-58.52	-58.2	8.17	-47.18
5	10998.43	59.62 PK	74	-14.38	-46.48	-47.19	8.17	-35.64
6	11014.06	48.66 AV	54	-5.34	-57.91	-57.65	8.17	-46.60
7	#16487.12	48.84 PK	68.2	-19.36	-58.79	-56.66	8.17	-46.42


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

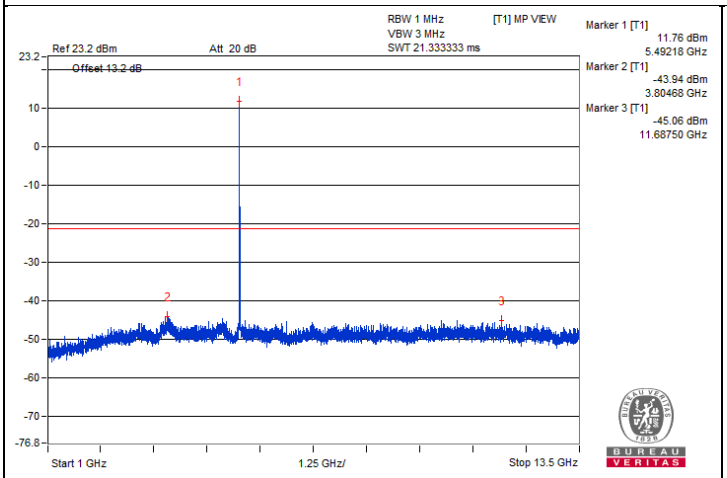


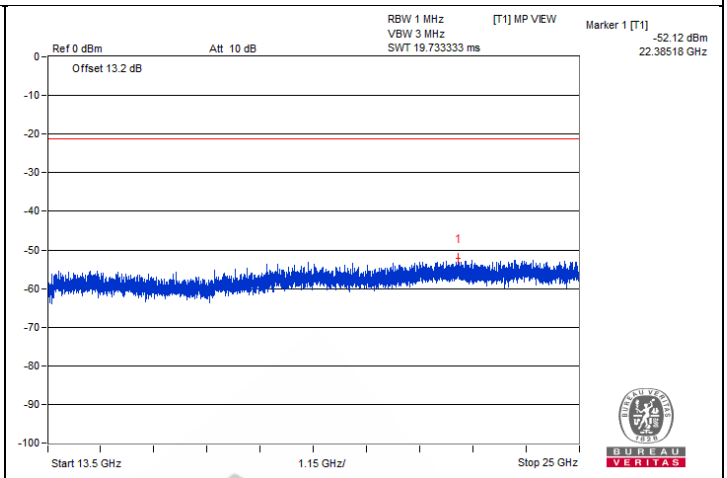

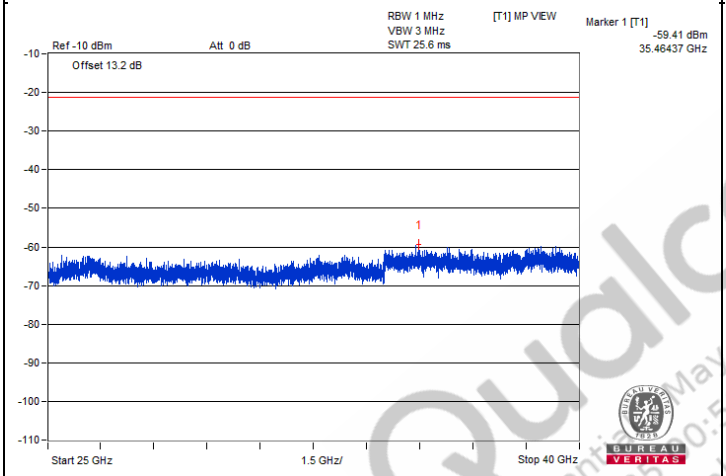

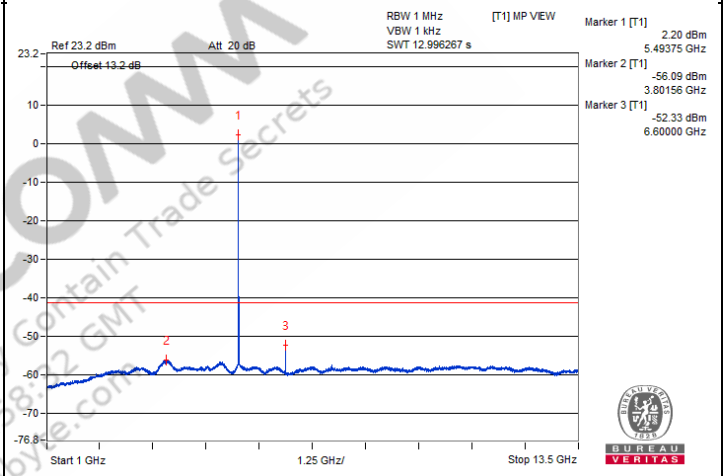


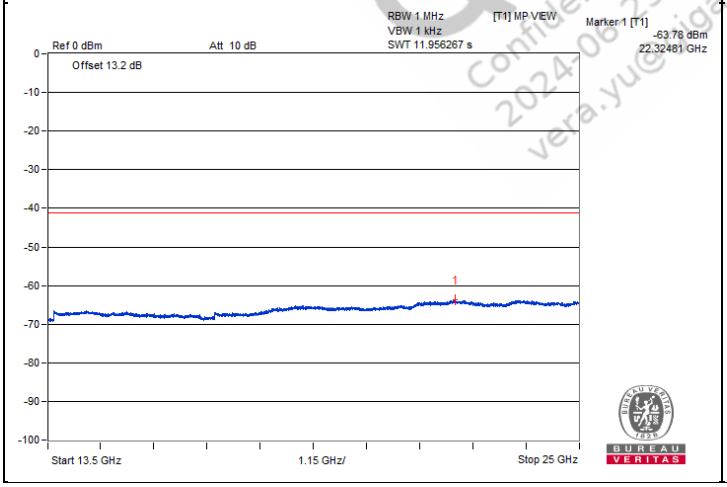


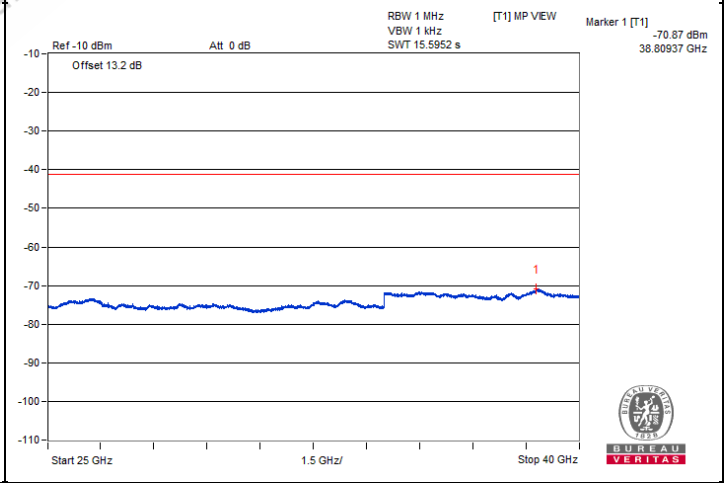



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

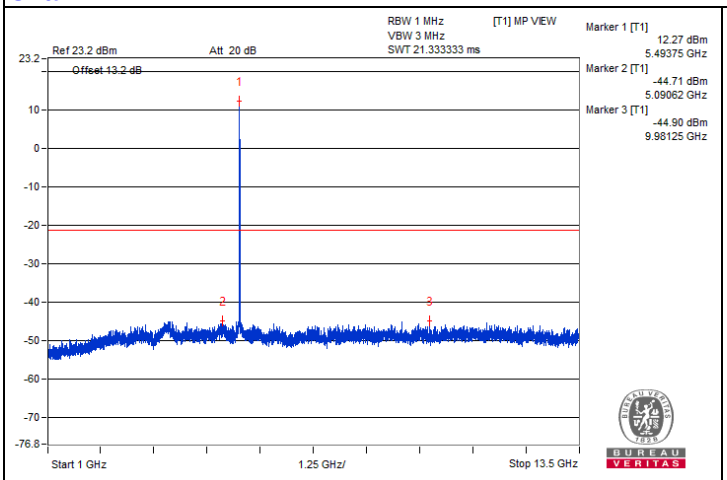


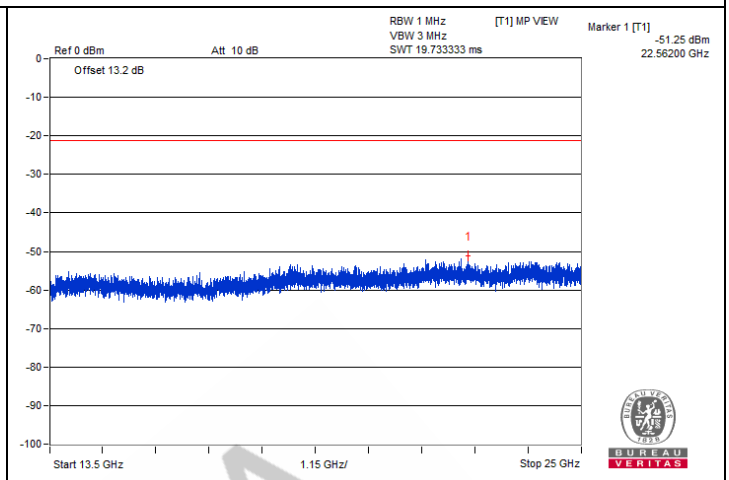

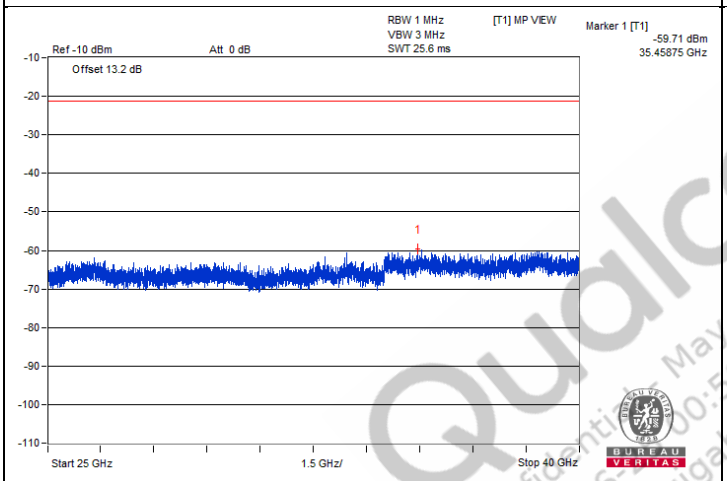

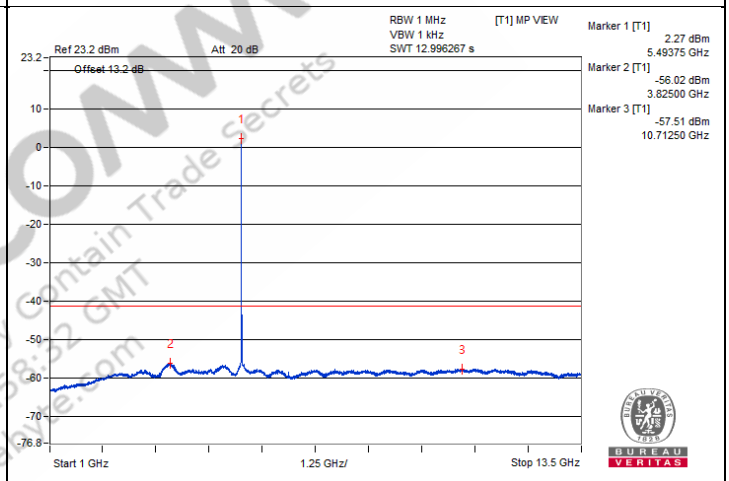

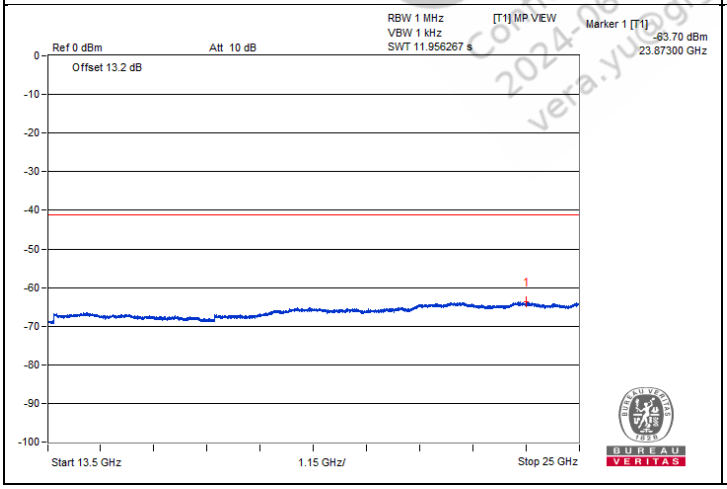

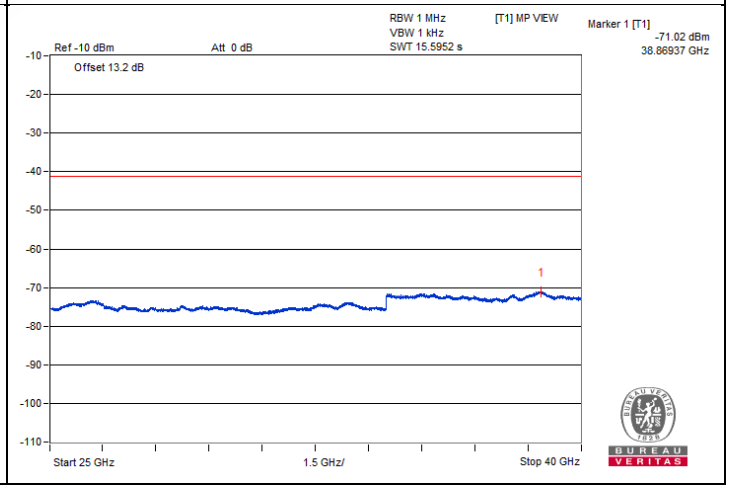

QualcOMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5457.12	59.87 PK	74	-14.13	-45.58	-46.96	7.82	-35.39
2	5459.81	47.5 AV	54	-6.5	-58.46	-58.72	7.82	-47.76
3	#5464.78	58.82 PK	68.2	-9.38	-45.8	-49.52	7.82	-36.44

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

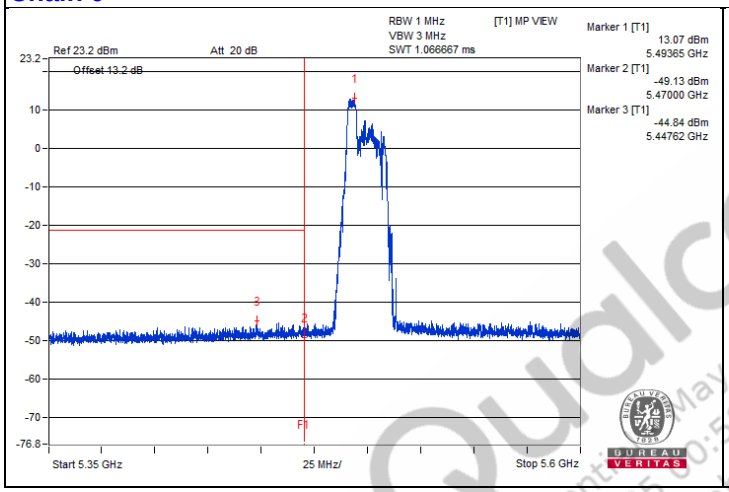

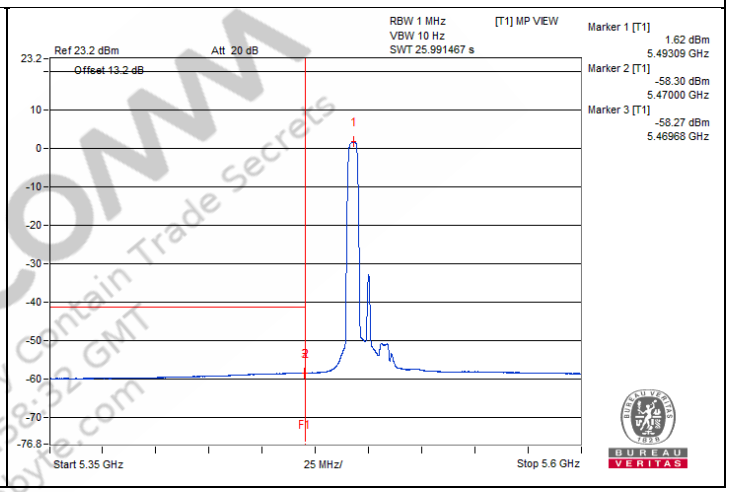

Chain 1

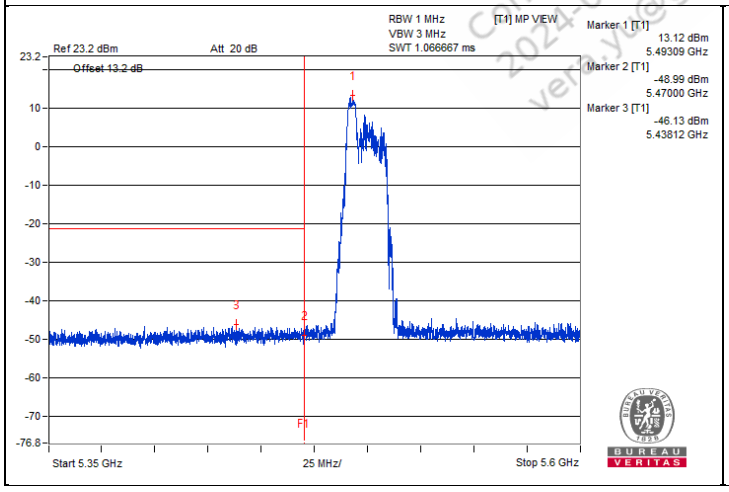

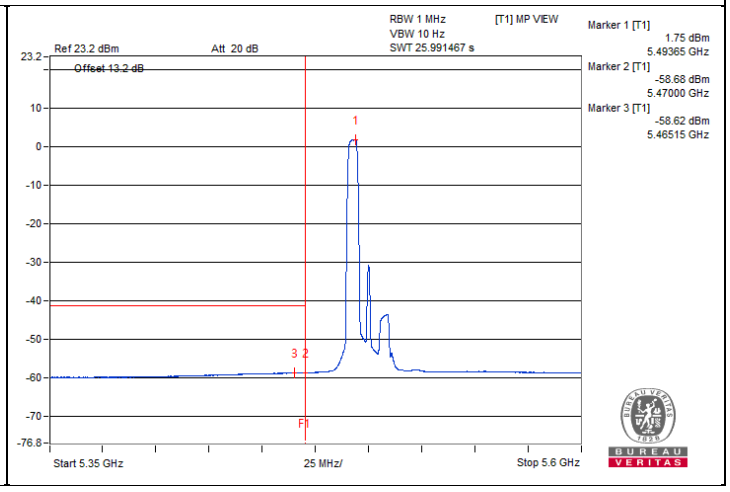

Qualcomm
Confidential - May Contain Trade Secrets
2021-06-25 00:58:32 GMT
ven.yu@gigabyte.com

802.11be (EHT20) 52-tone RU - Channel 116

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3710.93	60.7 PK	74	-13.3	-44.09	-48.42	8.17	-34.56
2	3732.81	49.9 AV	54	-4.1	-56.63	-56.46	8.17	-45.36
3	7426.56	57.96 PK	74	-16.04	-47.42	-49.89	8.17	-37.30
4	7423.43	47.41 AV	54	-6.59	-59.11	-58.96	8.17	-47.85
5	11175	59.32 PK	74	-14.68	-47.01	-47.24	8.17	-35.94
6	11170.31	48.4 AV	54	-5.6	-58.16	-57.92	8.17	-46.86
7	#16722.87	48.25 PK	68.2	-19.95	-56.93	-59.98	8.17	-47.01


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

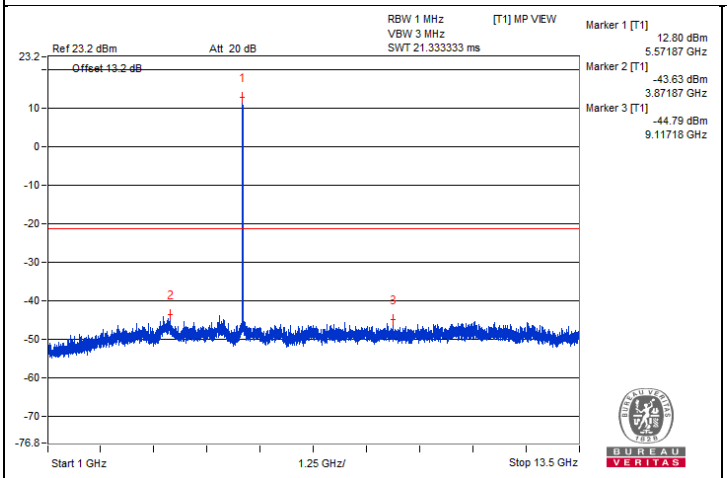


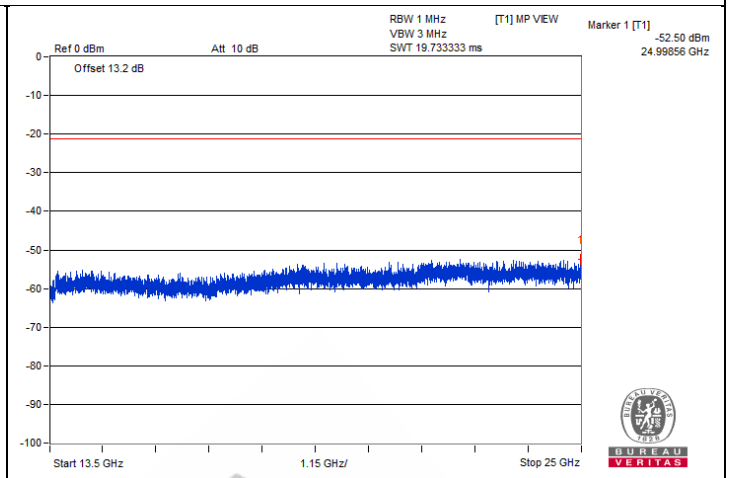

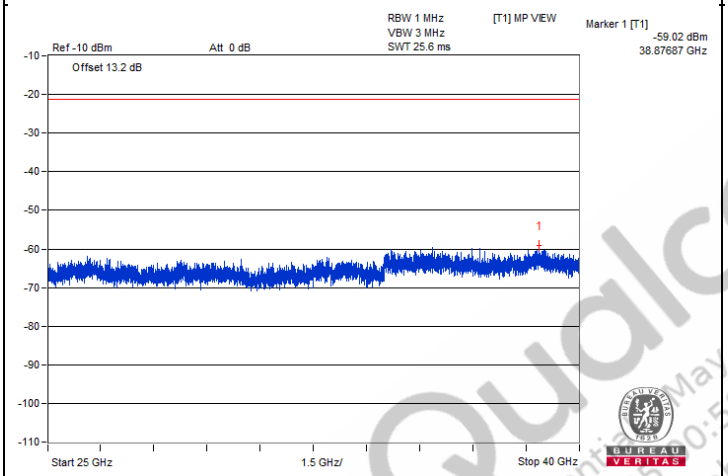

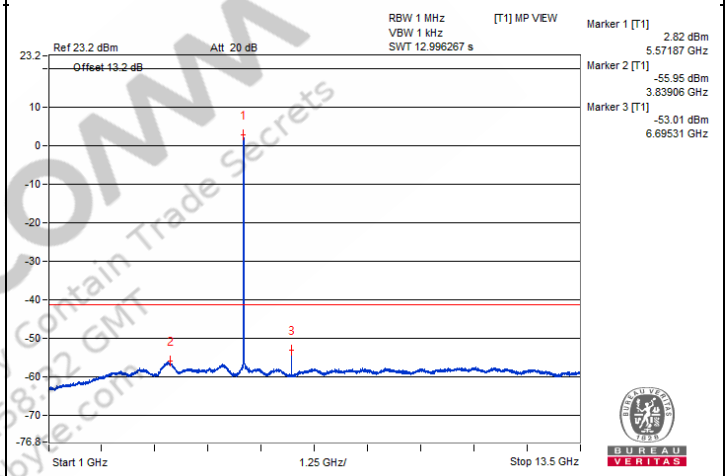


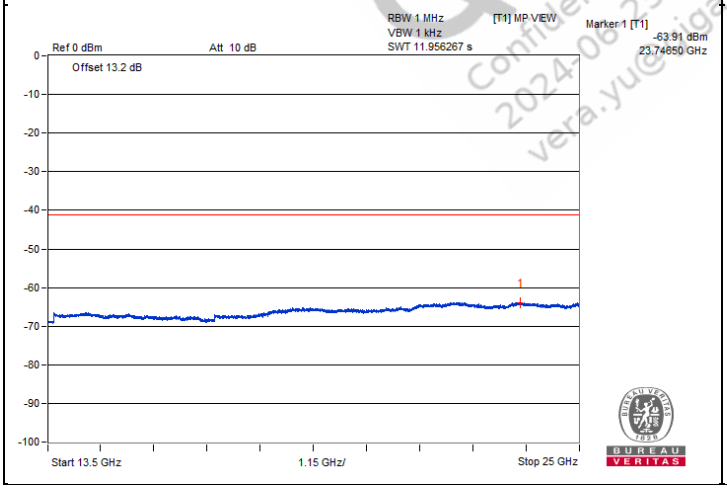


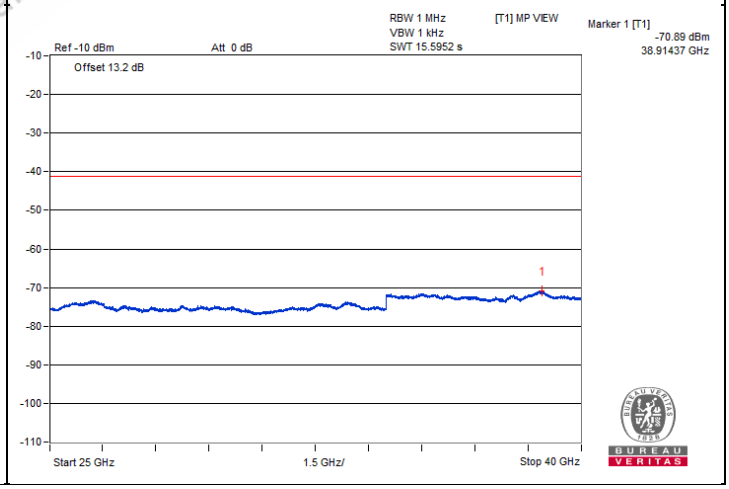



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

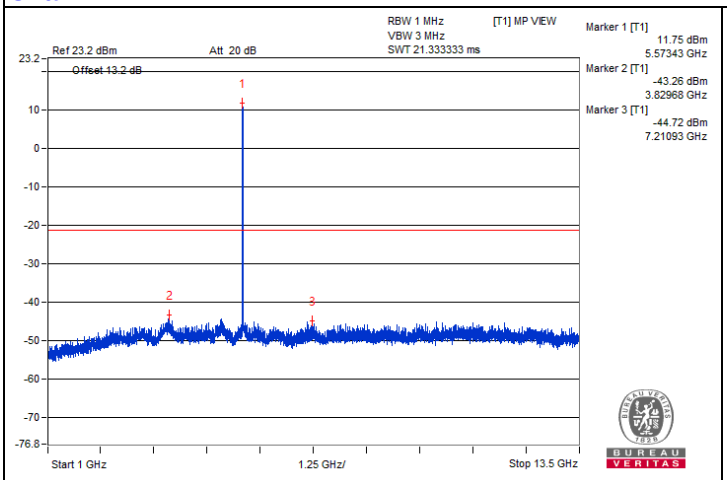


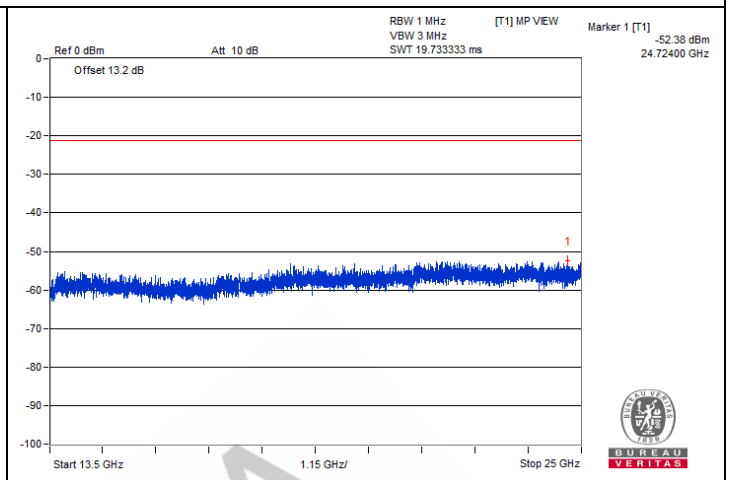

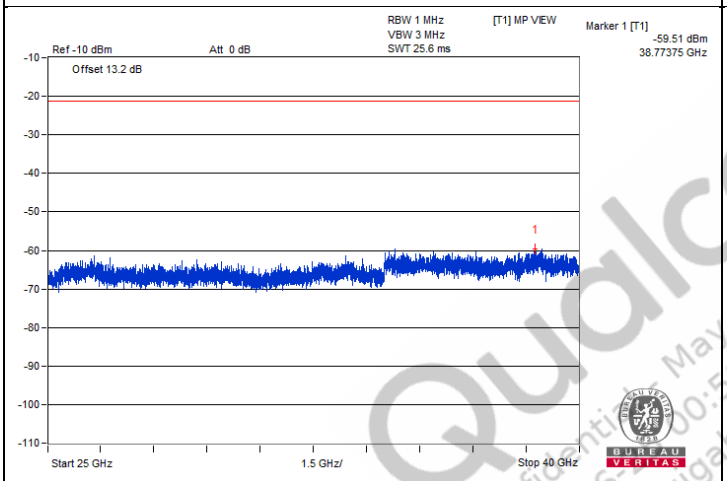

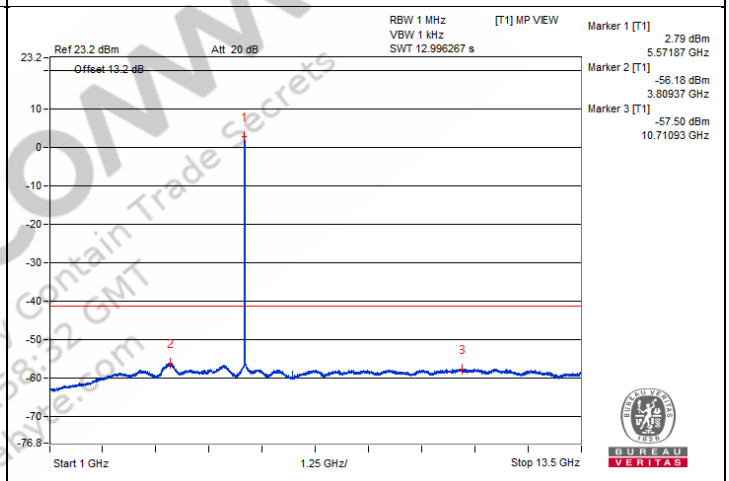

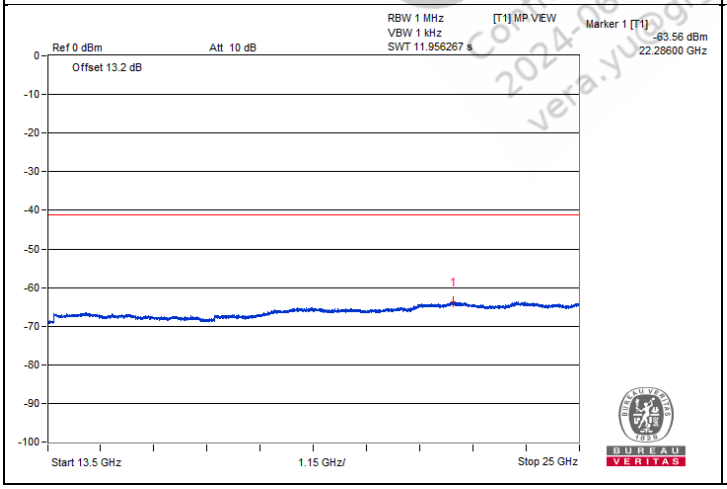

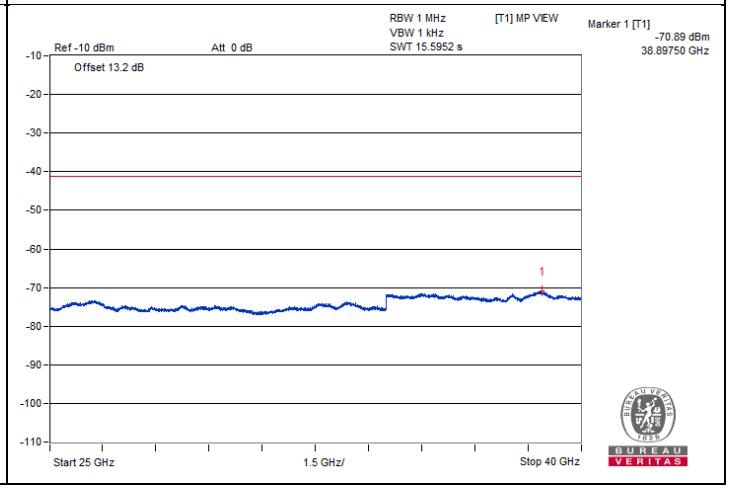

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5459	59.25 PK	74	-14.75	-48.02	-45.92	7.82	-36.01
2	5459.62	46.93 AV	54	-7.07	-59.29	-59.04	7.82	-48.33
3	#5461.28	59.16 PK	68.2	-9.04	-46.71	-47.17	7.82	-36.10

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

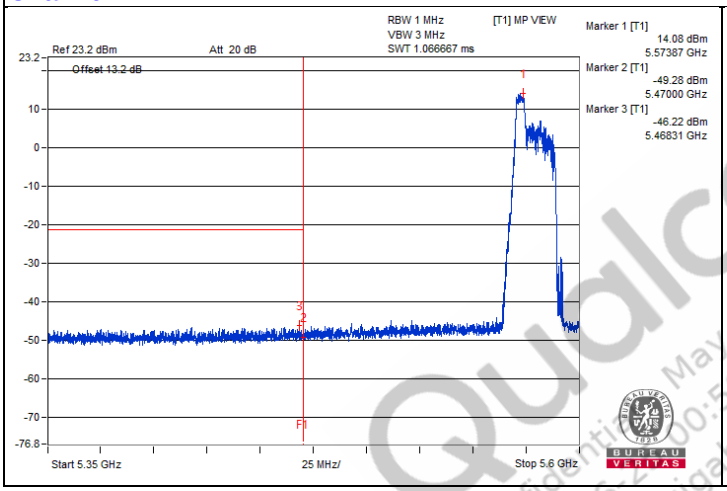

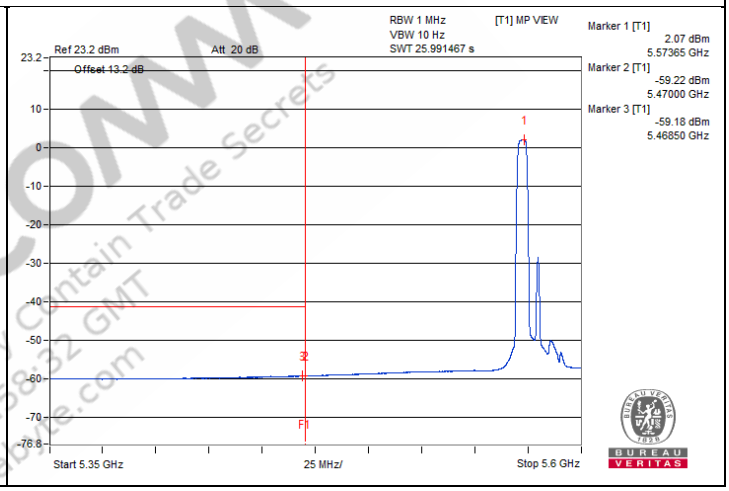

Chain 1

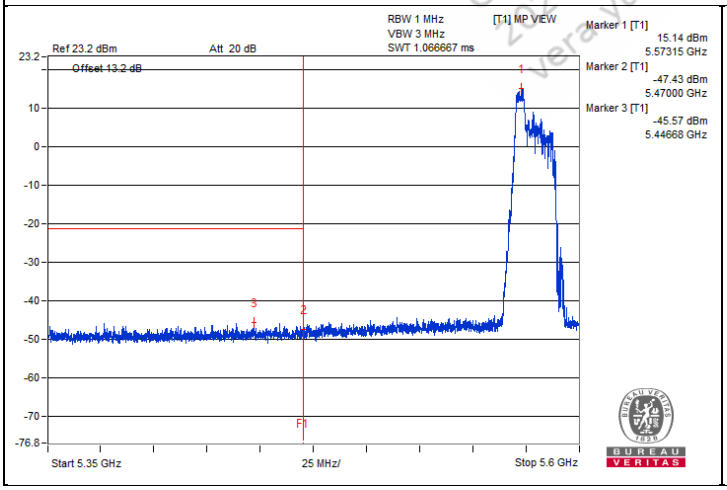

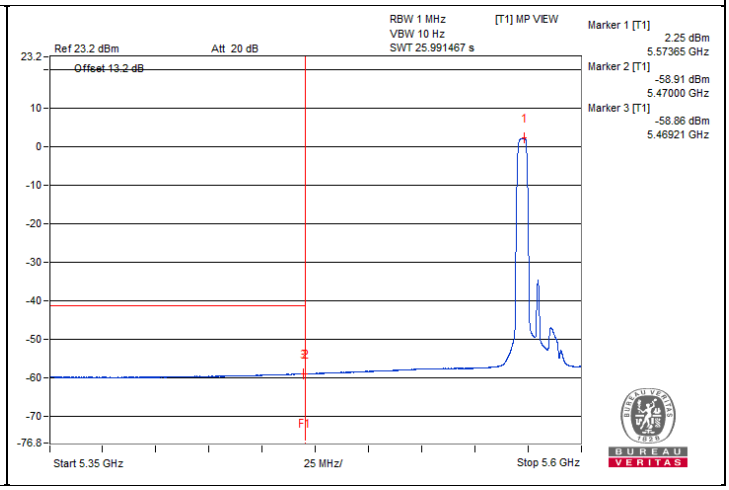

QualcOMM Confidential and Proprietary – May Contain Trade Secrets
2024-06-21 00:58:32 GMT
veraxu@gigabyte.com

802.11be (EHT20) 52-tone RU - Channel 140

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3812.5	60.81 PK	74	-13.19	-45.37	-45.91	8.17	-34.45
2	3798.43	50.29 AV	54	-3.71	-56.13	-56.18	8.17	-44.97
3	7601.56	58.38 PK	74	-15.62	-47.27	-49.02	8.17	-36.88
4	7596.87	47.96 AV	54	-6.04	-58.55	-58.42	8.17	-47.30
5	11401.56	59.59 PK	74	-14.41	-45.97	-47.96	8.17	-35.67
6	11418.75	48.51 AV	54	-5.49	-57.87	-57.99	8.17	-46.75
7	#17105.25	49.48 PK	68.2	-18.72	-55.94	-58.3	8.17	-45.78


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

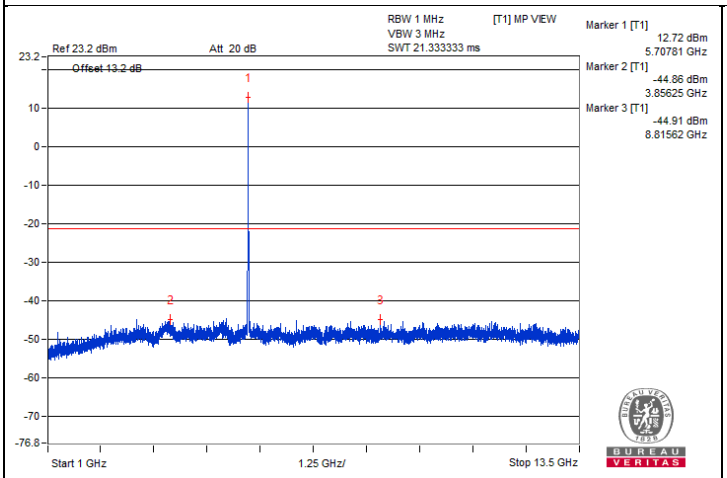


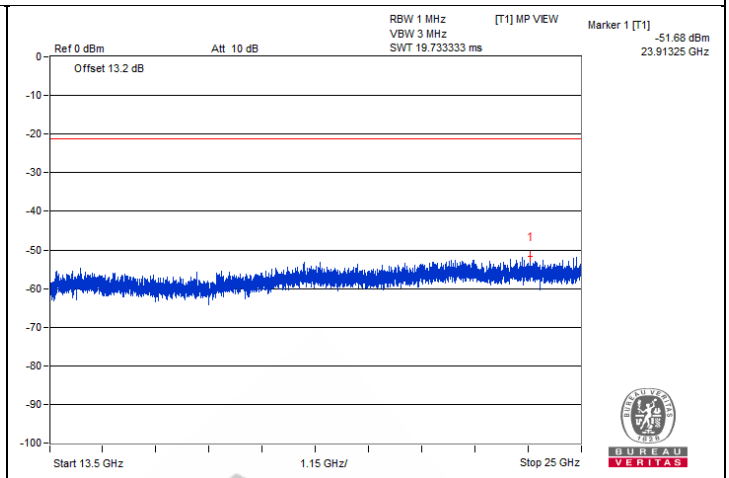

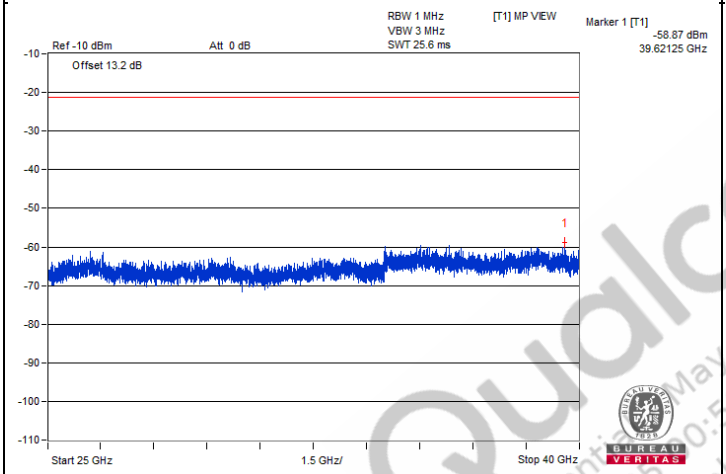

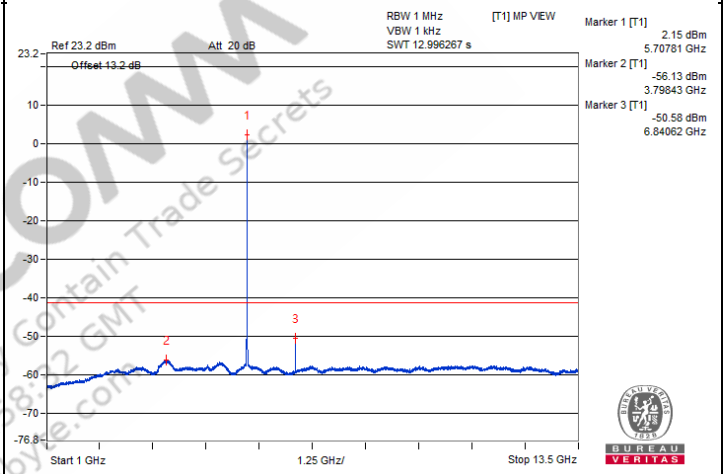


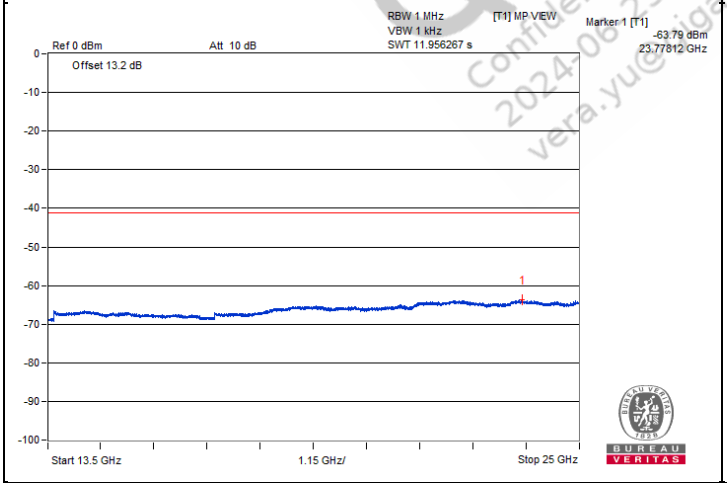


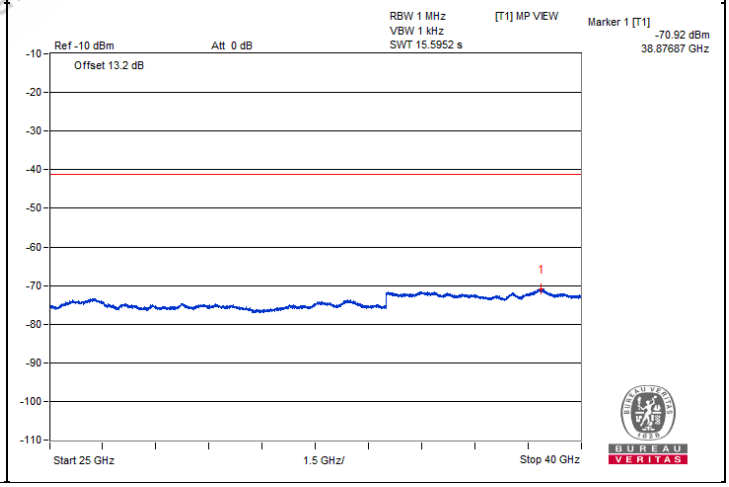



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

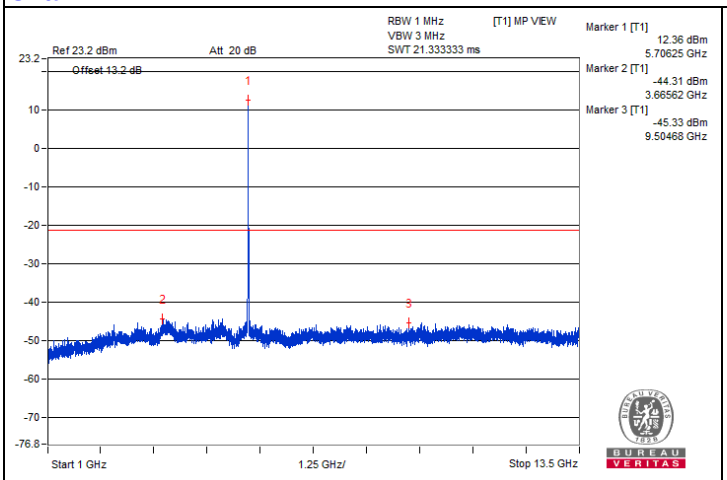


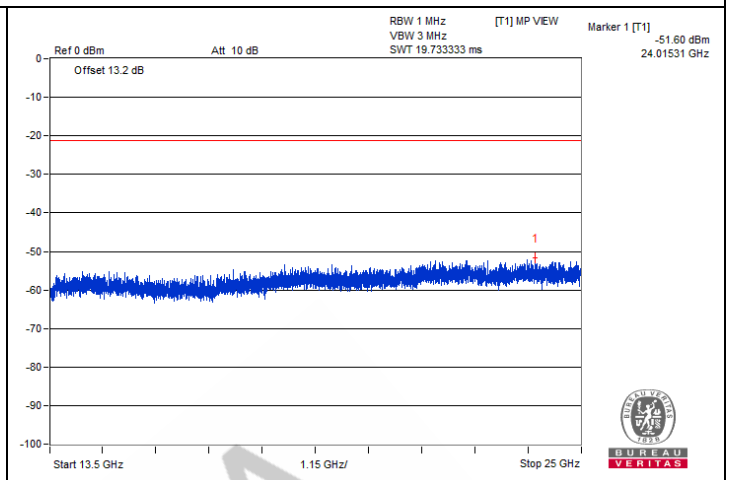

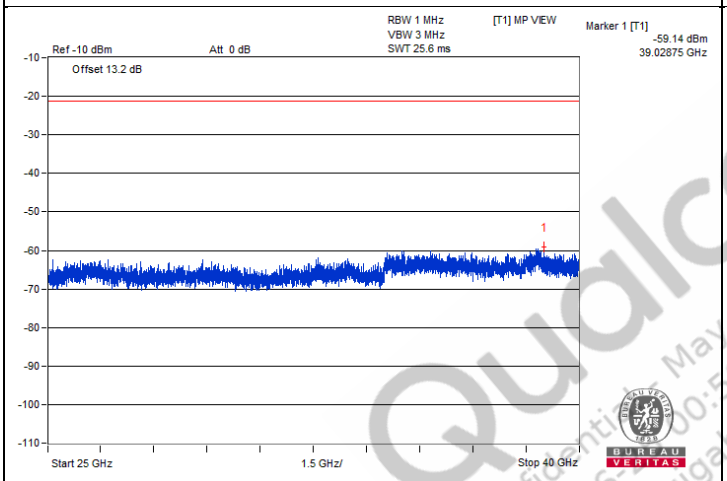

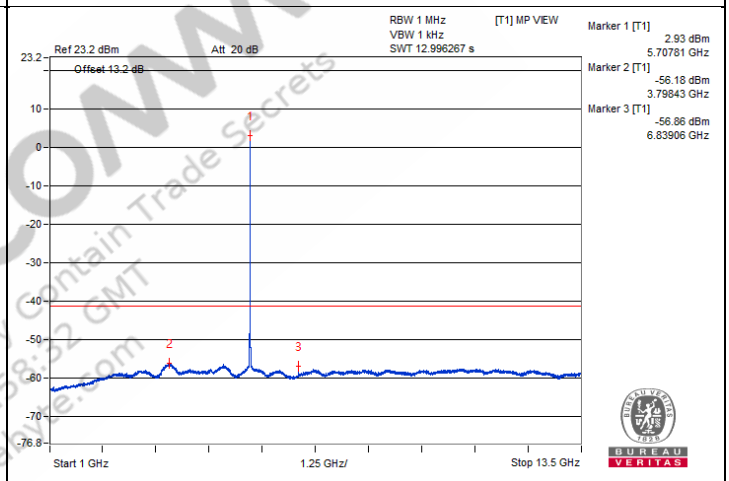

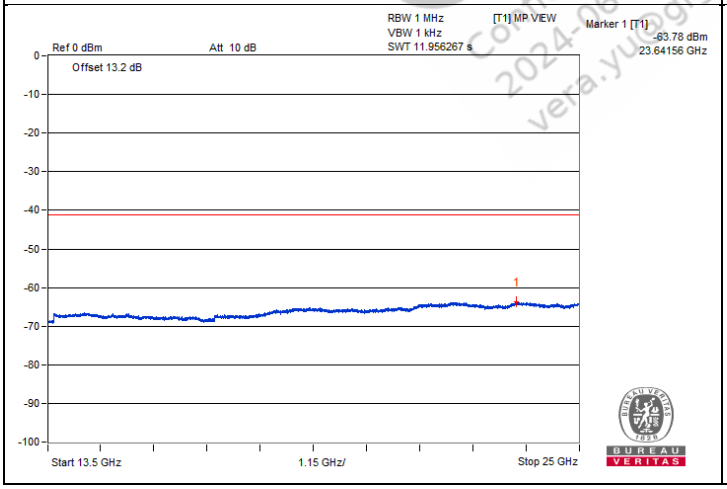

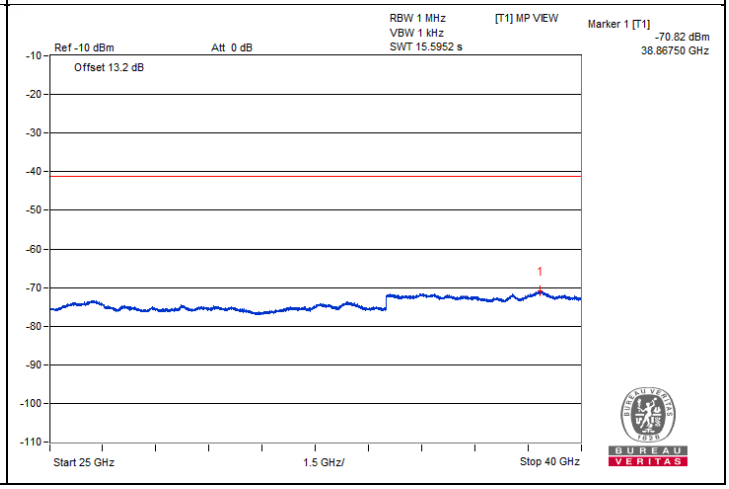

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5727.72	60.82 PK	68.2	-7.38	-45.61	-44.95	7.82	-34.44


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

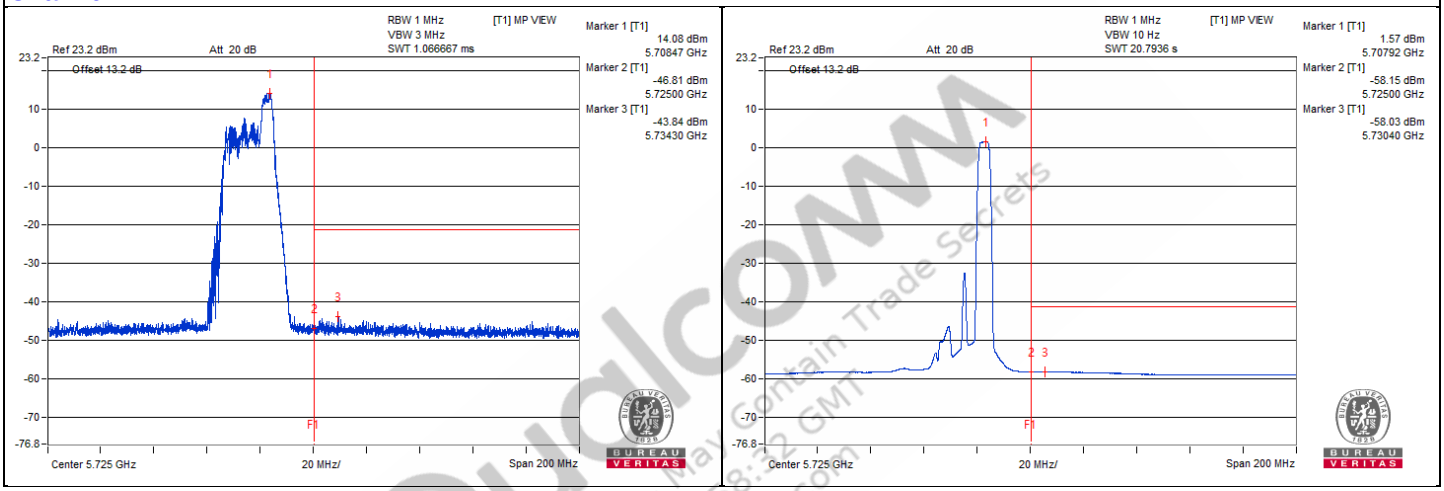

Chain 1

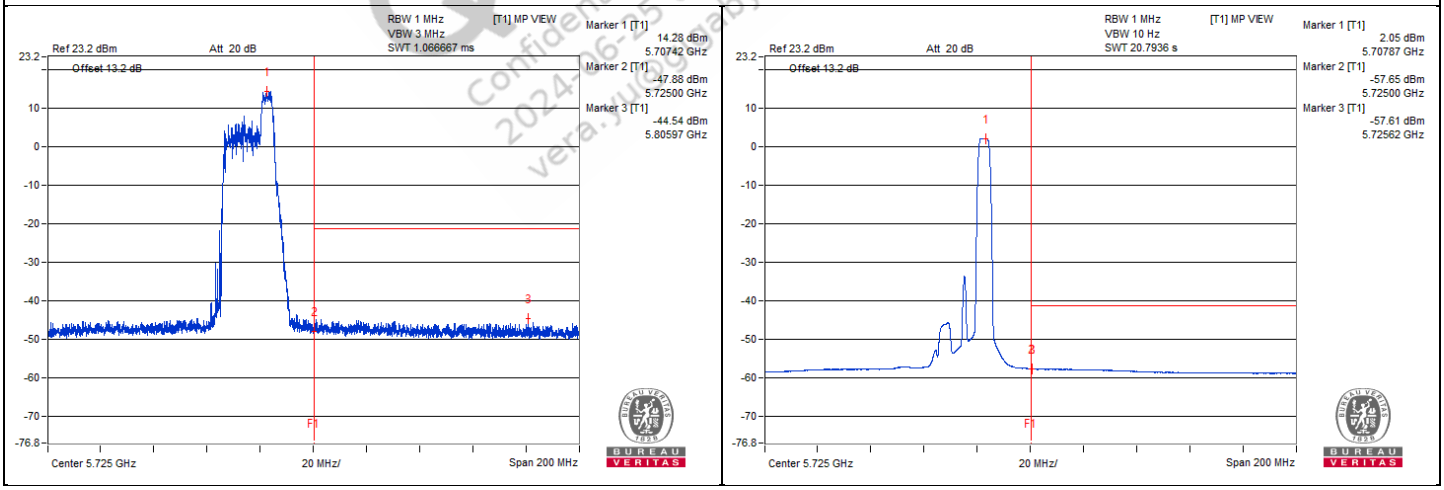

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@fusebyte.com

802.11be (EHT20) 52-tone RU - Channel 144

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3823.43	61.58 PK	74	-12.42	-43.76	-46.33	8.17	-33.68
2	3814.06	50.16 AV	54	-3.84	-56.48	-56.08	8.17	-45.10
3	7607.81	58.58 PK	74	-15.42	-48.93	-47	8.17	-36.68
4	7640.62	47.98 AV	54	-6.02	-58.66	-58.27	8.17	-47.28
5	11432.81	59.98 PK	74	-14.02	-47.35	-45.72	8.17	-35.28
6	11457.81	48.67 AV	54	-5.33	-57.57	-57.99	8.17	-46.59
7	#17146.93	49.85 PK	68.2	-18.35	-55.08	-58.92	8.17	-45.41


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

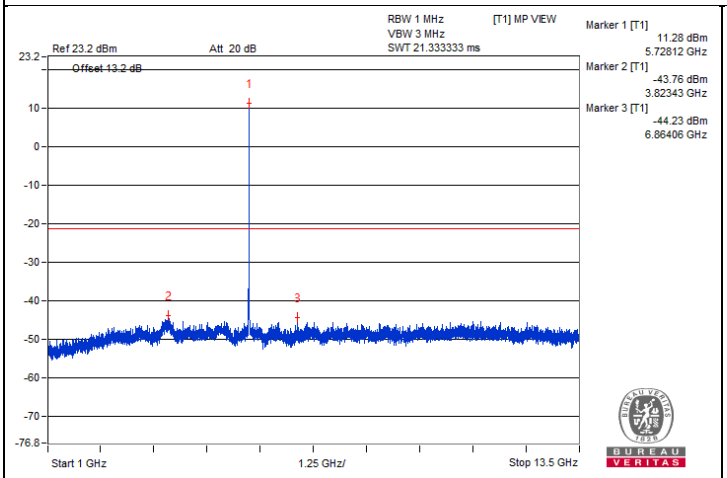


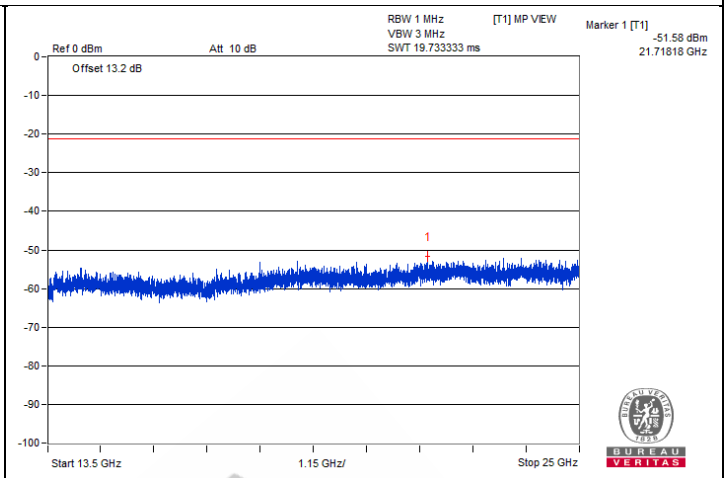

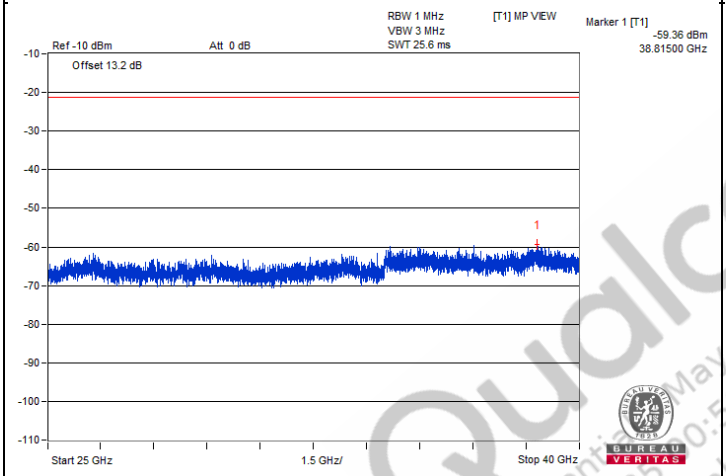

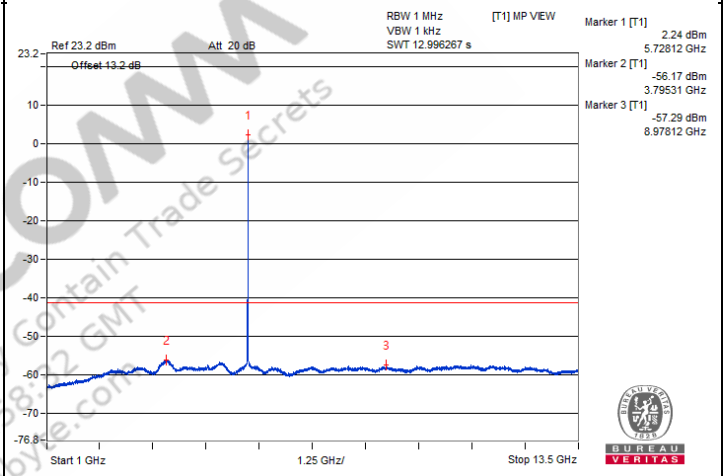


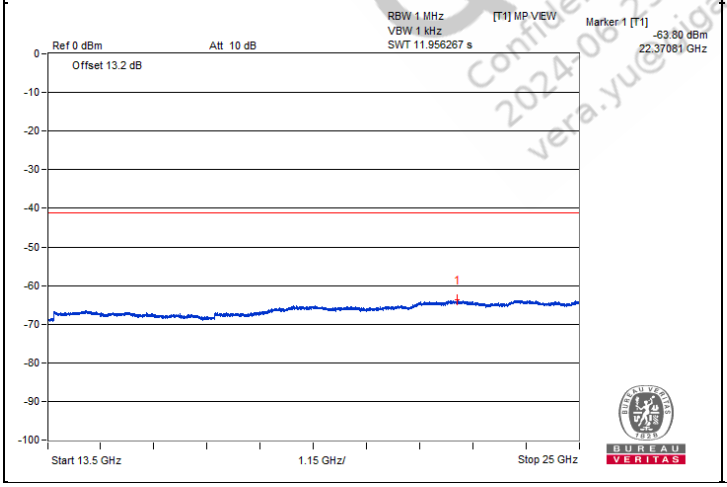


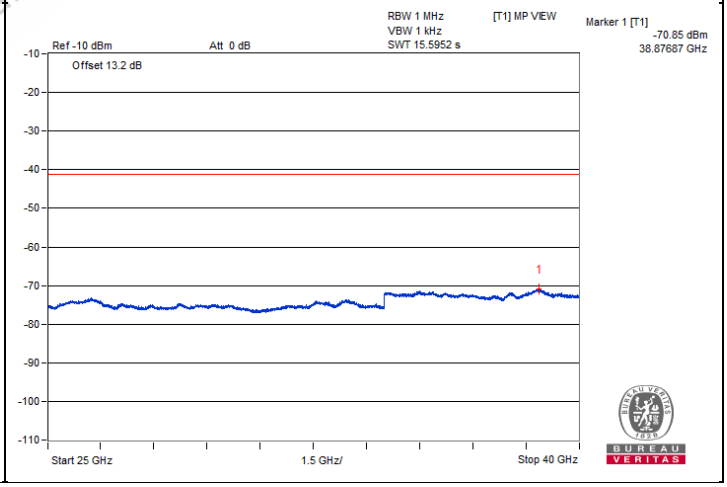



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gabyte.com


Chain 1

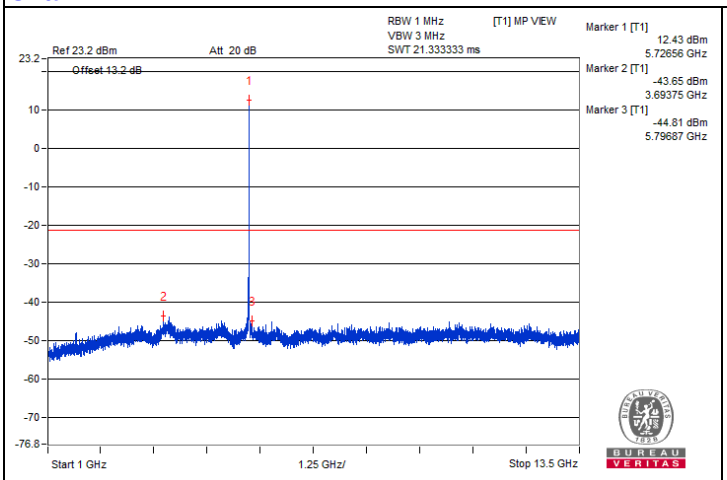


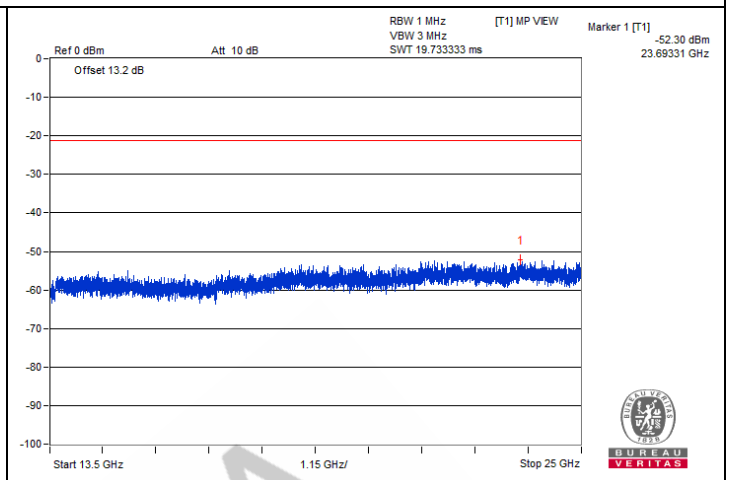

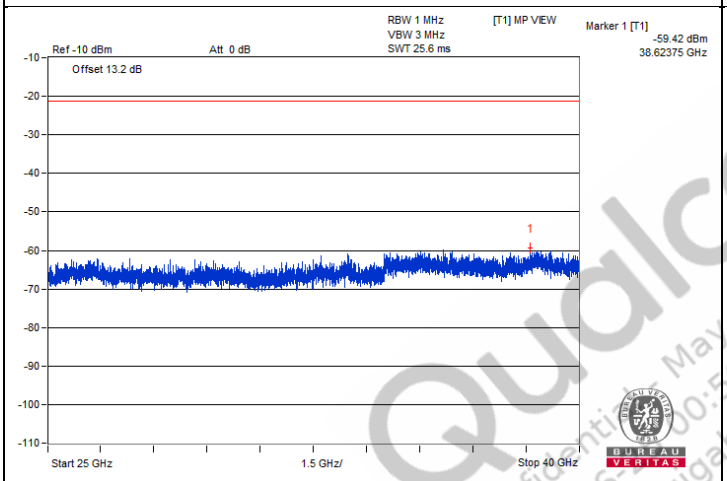

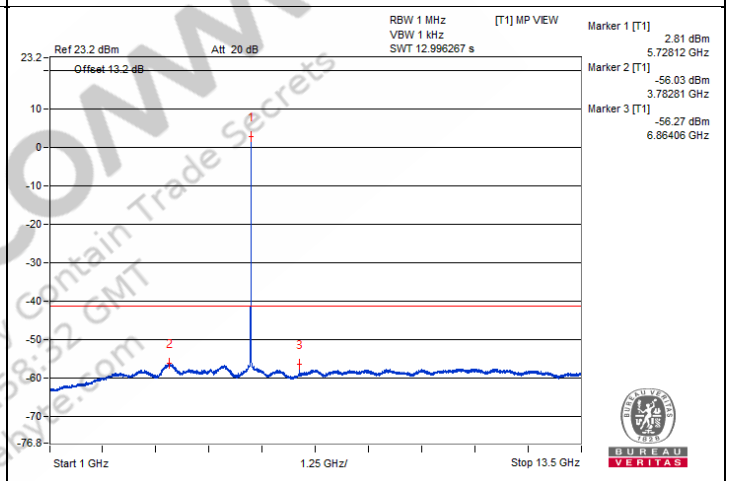

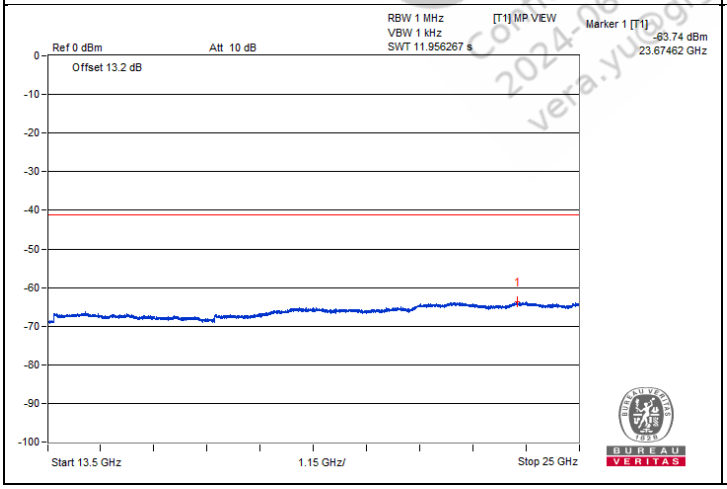

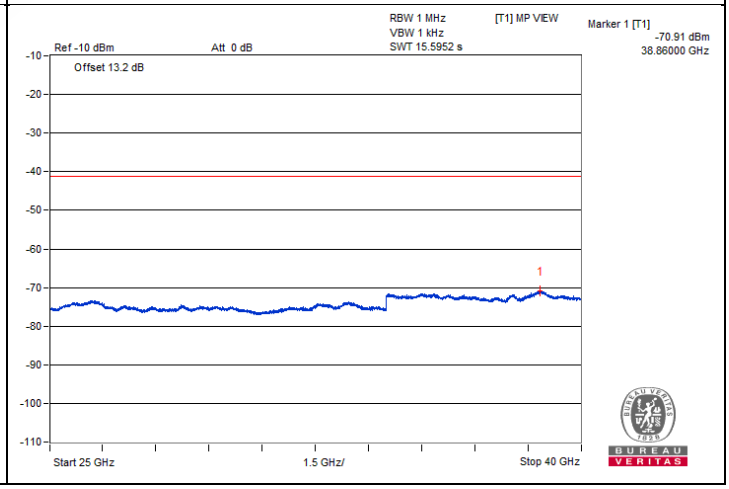

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5889.55	59.22 PK	68.2	-8.98	-48.71	-45.58	7.82	-36.04

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

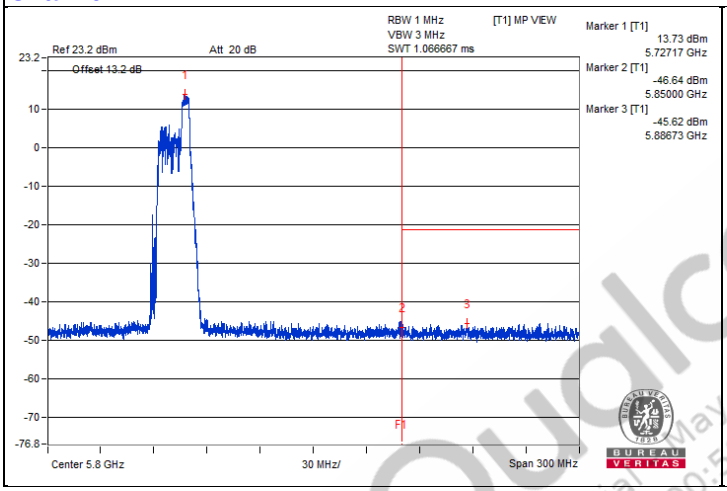

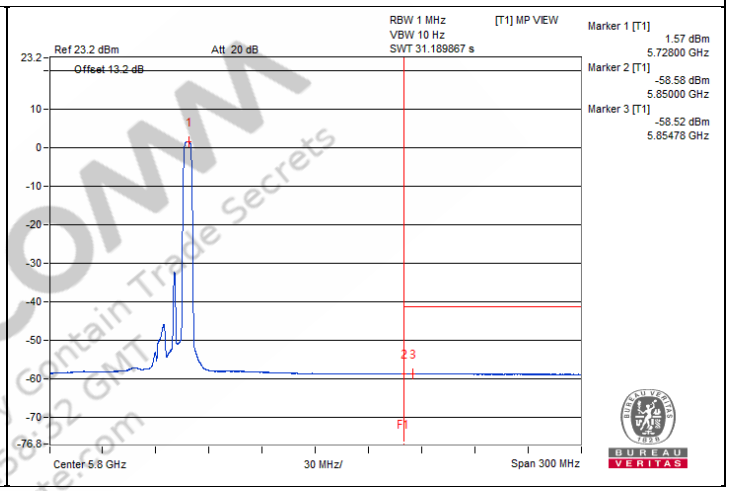

Chain 1

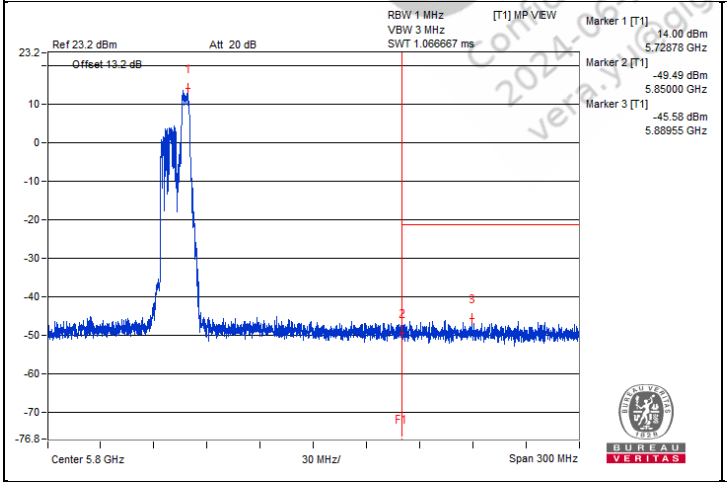

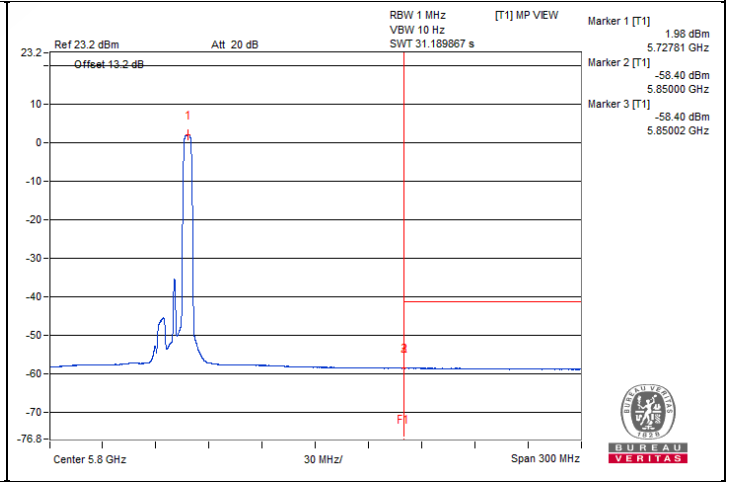

QualcOMM Confidential May Contain Trade Secrets 2024-06-25 00:56:52 GMT vera.yu@gigabyte.com

802.11be (EHT20) 52-tone RU - Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3812.5	61.85 PK	74	-12.15	-44.97	-44.24	8.17	-33.41
2	3823.43	50.13 AV	54	-3.87	-56.4	-56.23	8.17	-45.13
3	7650	59.75 PK	74	-14.25	-46.09	-47.39	8.17	-35.51
4	7678.12	48.42 AV	54	-5.58	-57.77	-58.28	8.17	-46.84
5	11501.56	59.25 PK	74	-14.75	-48	-46.5	8.17	-36.01
6	11470.31	48.67 AV	54	-5.33	-57.65	-57.9	8.17	-46.59
7	#17251.87	49.07 PK	68.2	-19.13	-57.45	-57.29	8.17	-46.19


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

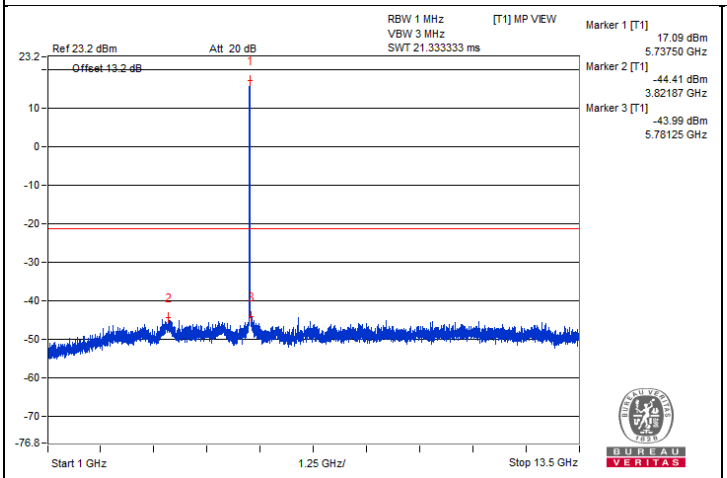


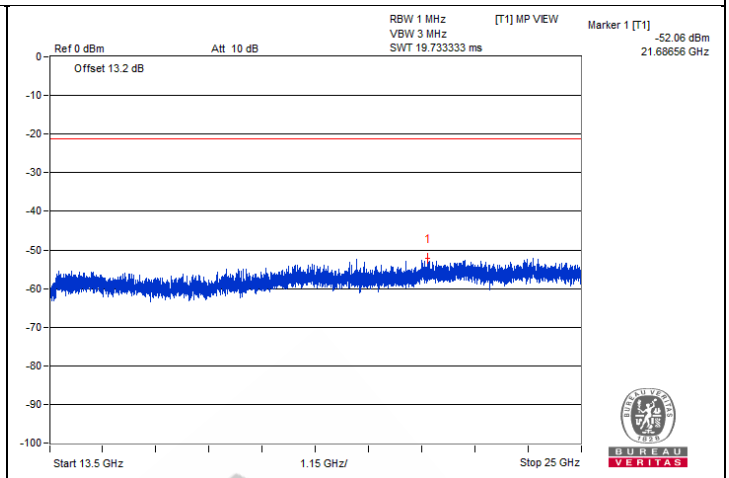

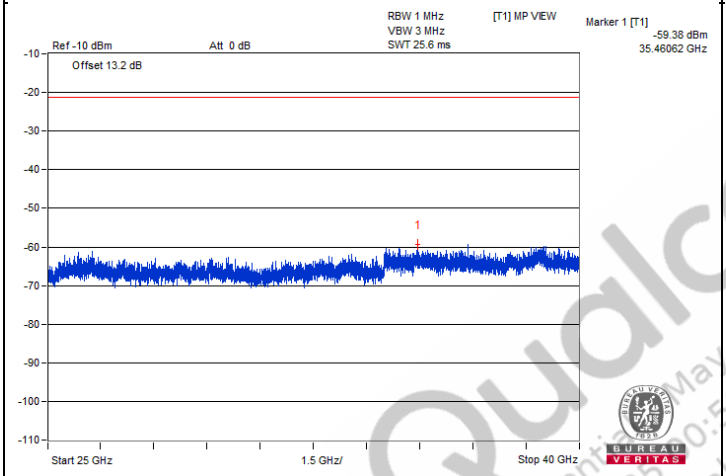

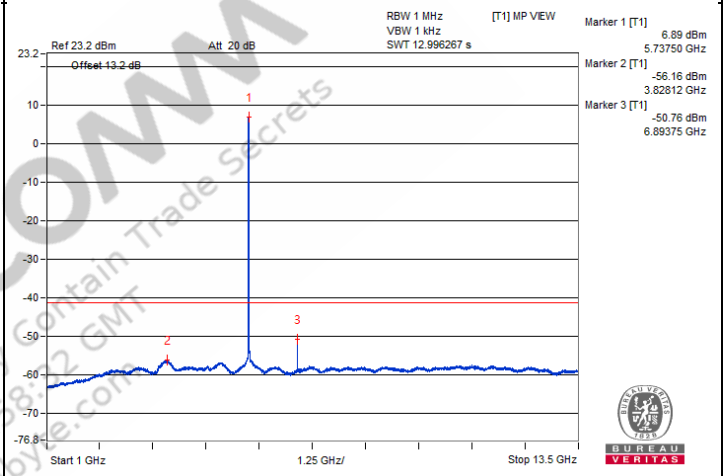


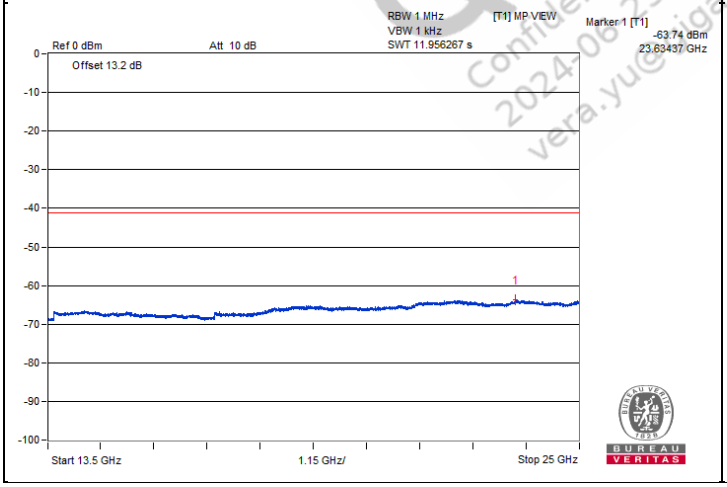


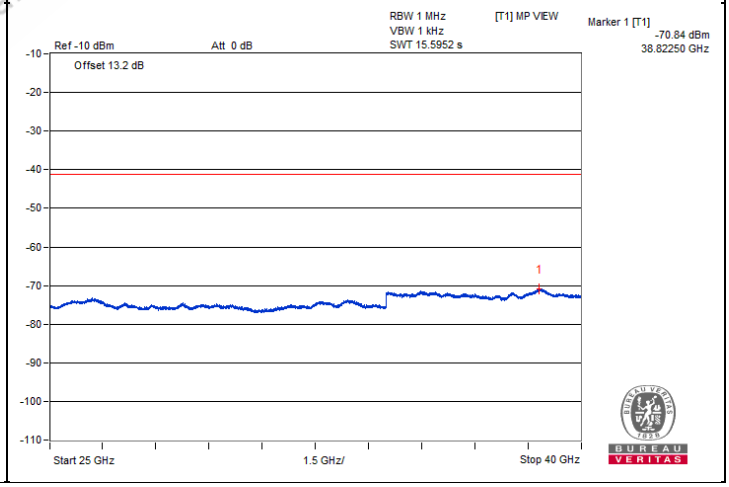



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

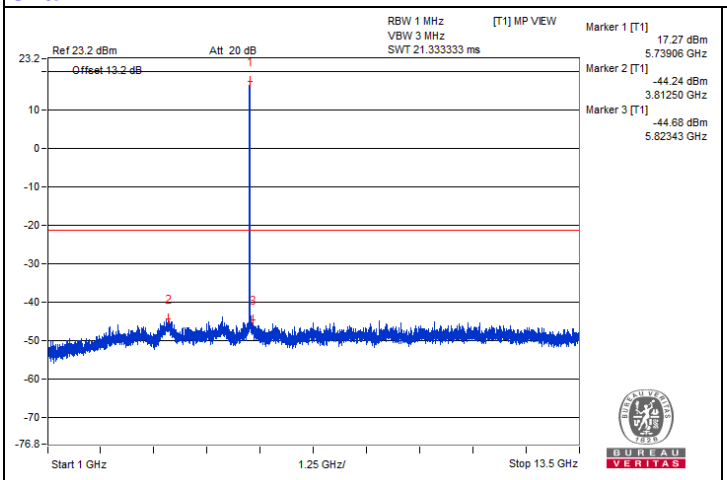


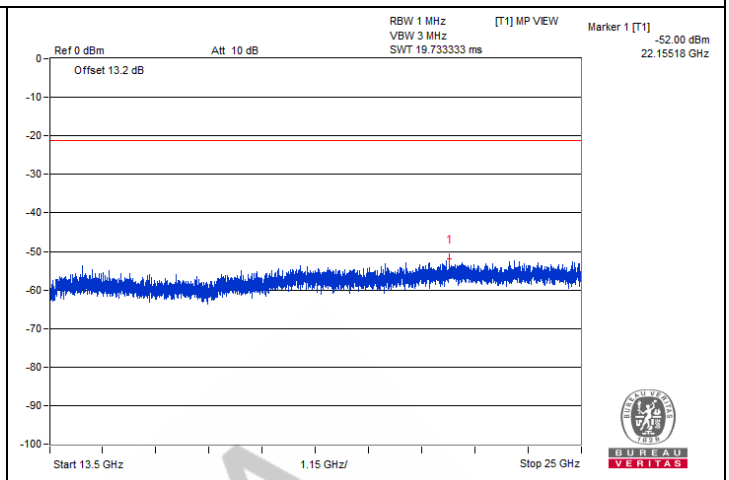

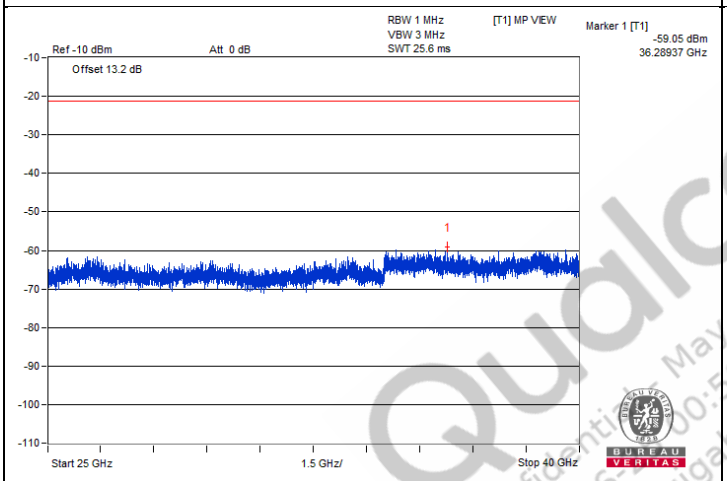

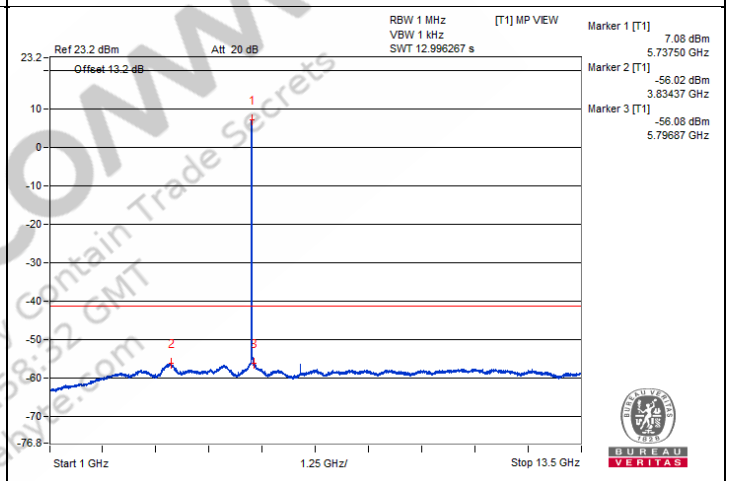

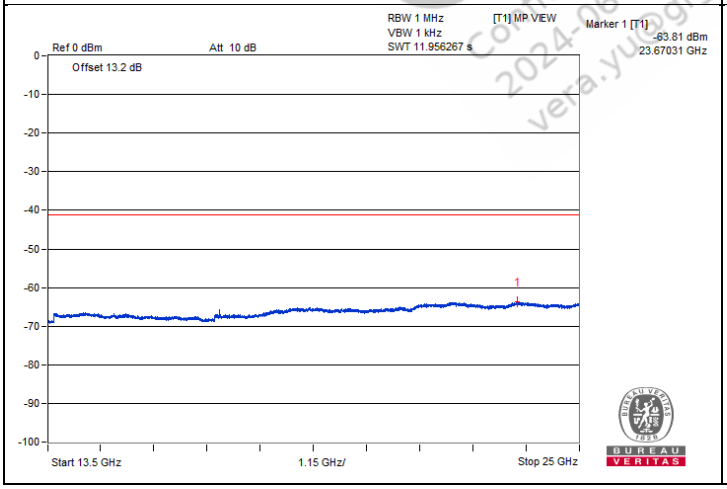


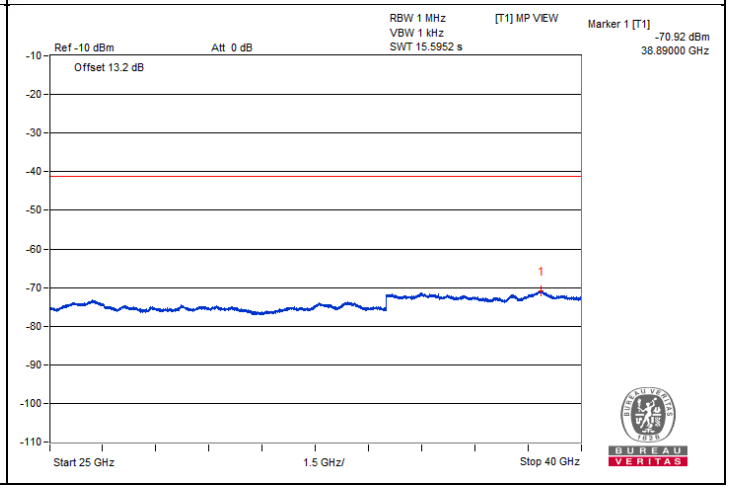

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

Chain 0

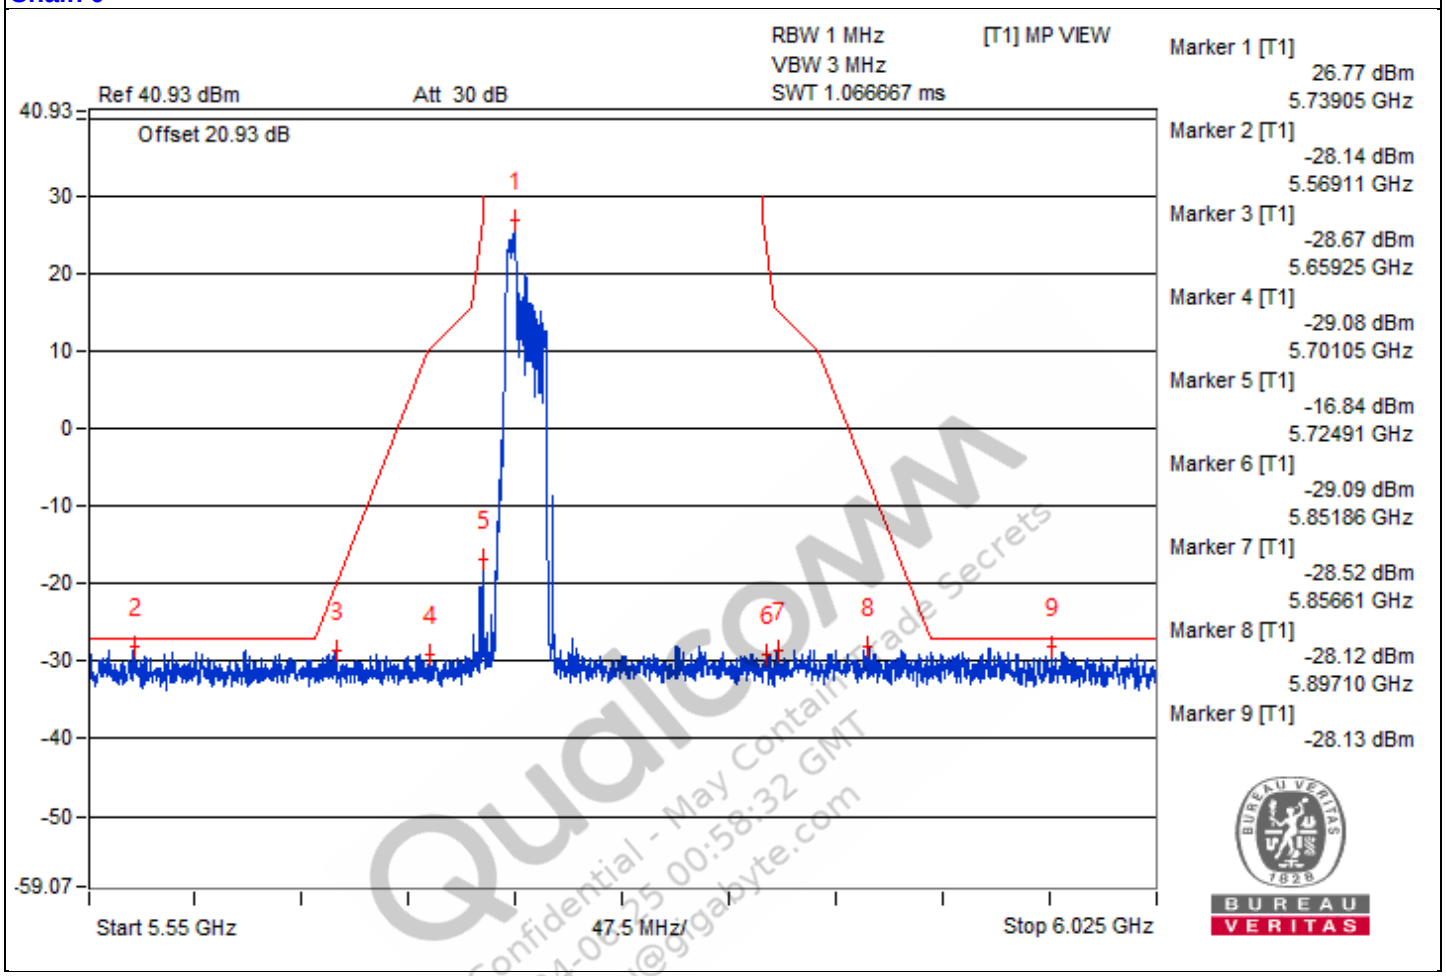

Qualcomm Confidential - May Contain Trade Secrets 2024-08-25 00:58:32 GMT vera.yu@gigabyte.com

Chain 1

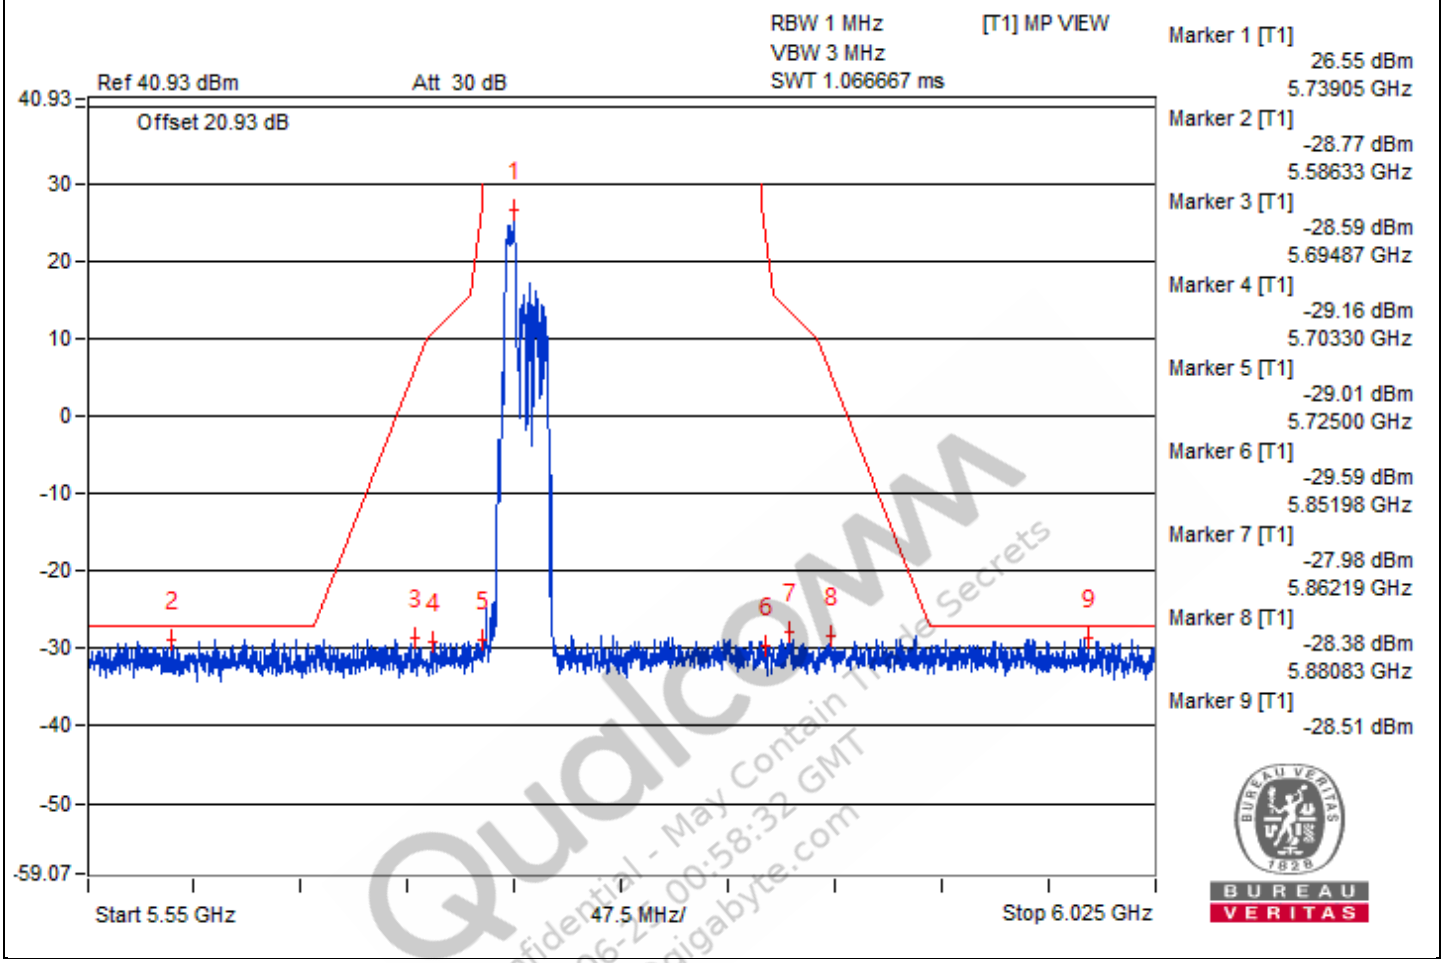

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT20) 52-tone RU - Channel 157

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3860.93	60.65 PK	74	-13.35	-46.8	-44.97	8.17	-34.61
2	3854.68	49.96 AV	54	-4.04	-56.46	-56.5	8.17	-45.30
3	7695.31	58.68 PK	74	-15.32	-47.61	-47.91	8.17	-36.58
4	7726.56	48.35 AV	54	-5.65	-58.18	-58	8.17	-46.91
5	11551.56	59.16 PK	74	-14.84	-47.62	-46.97	8.17	-36.10
6	11556.25	48.55 AV	54	-5.45	-57.94	-57.84	8.17	-46.71
7	#17361.12	49.41 PK	68.2	-18.79	-58.05	-56.2	8.17	-45.85


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

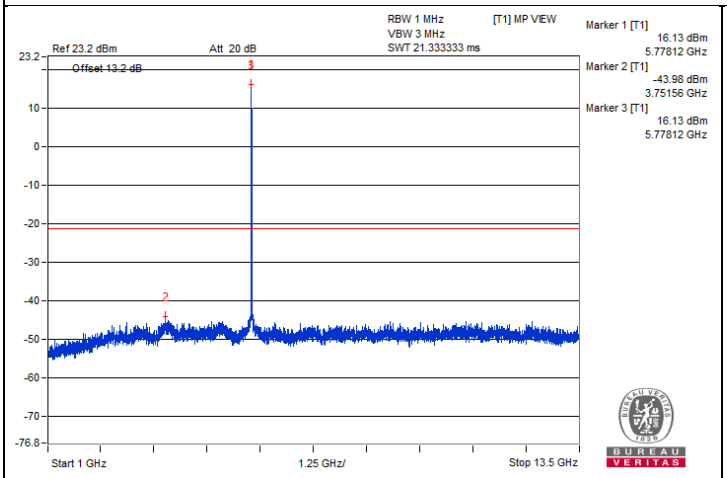


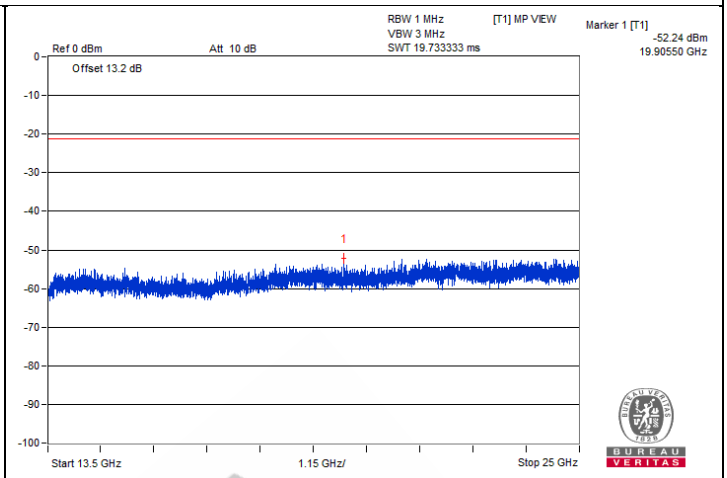

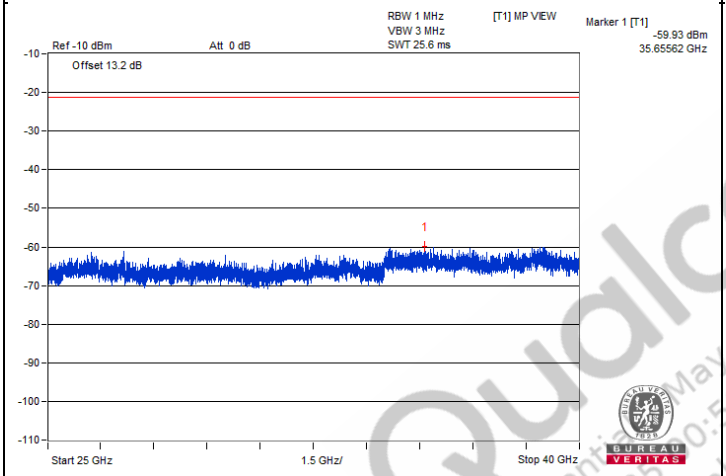

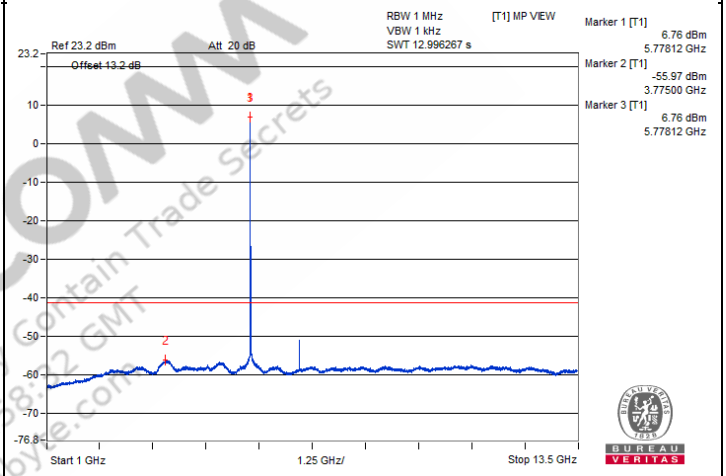


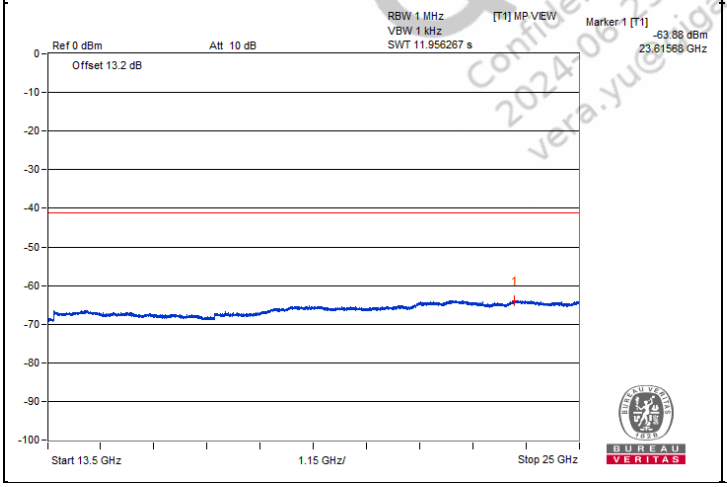


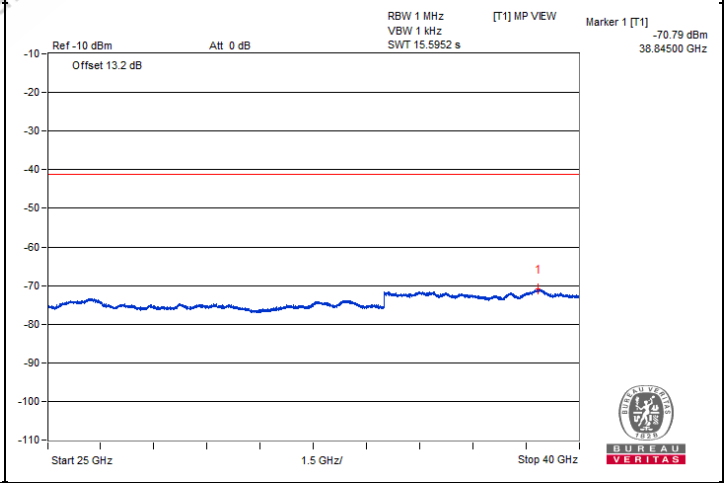



QualcOMM
Confidential – May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yu@gigabyte.com


Chain 1

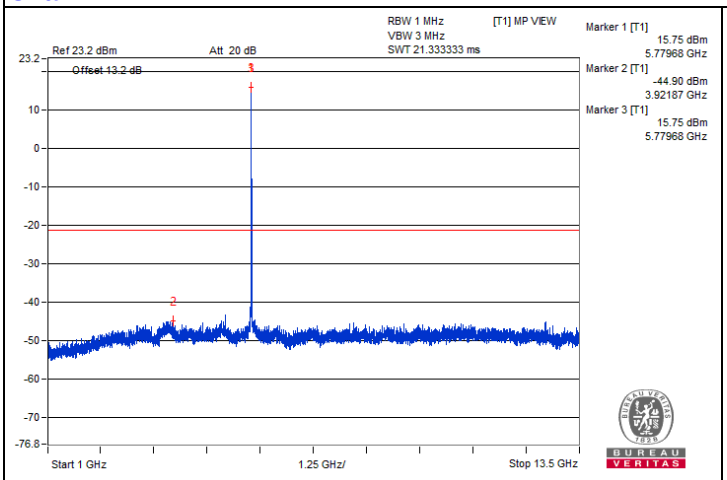


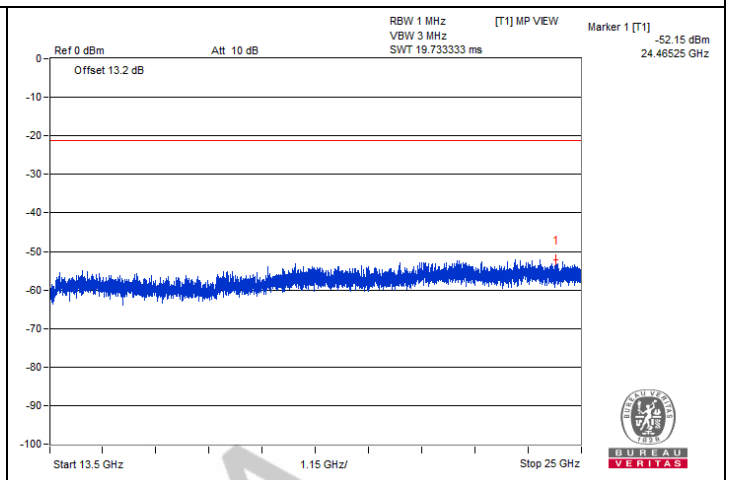

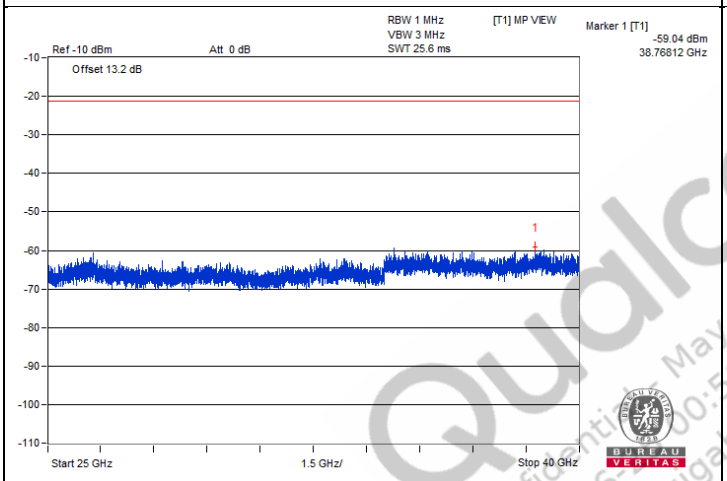

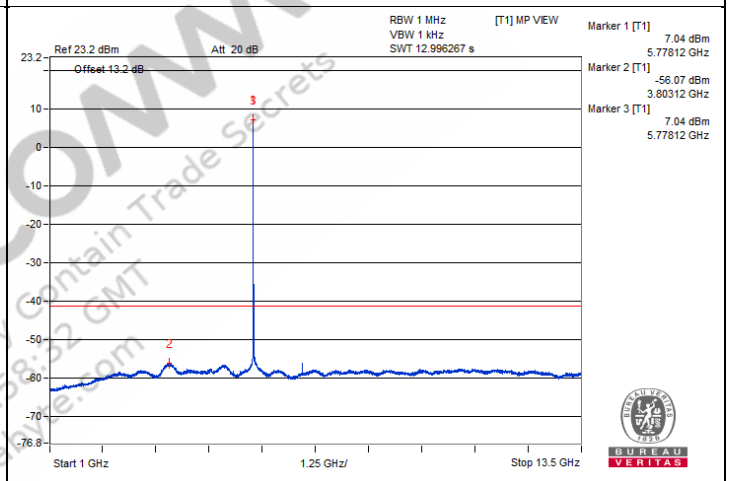

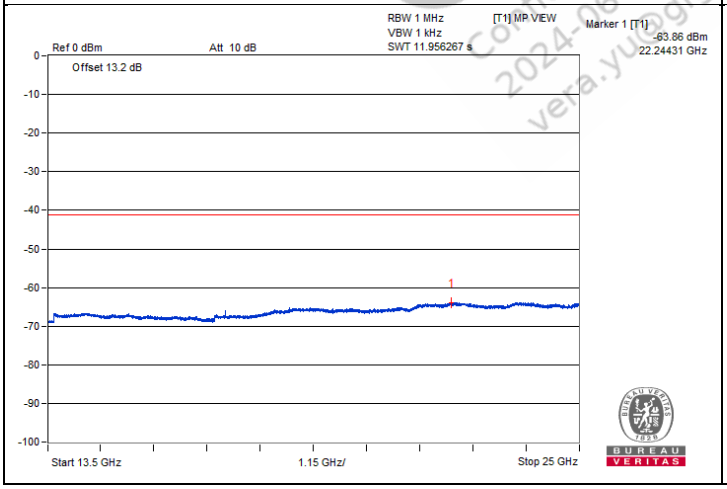


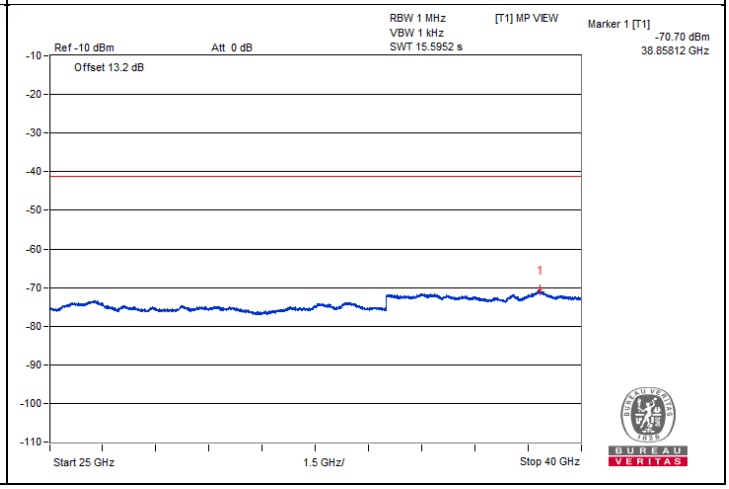

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

Chain 0

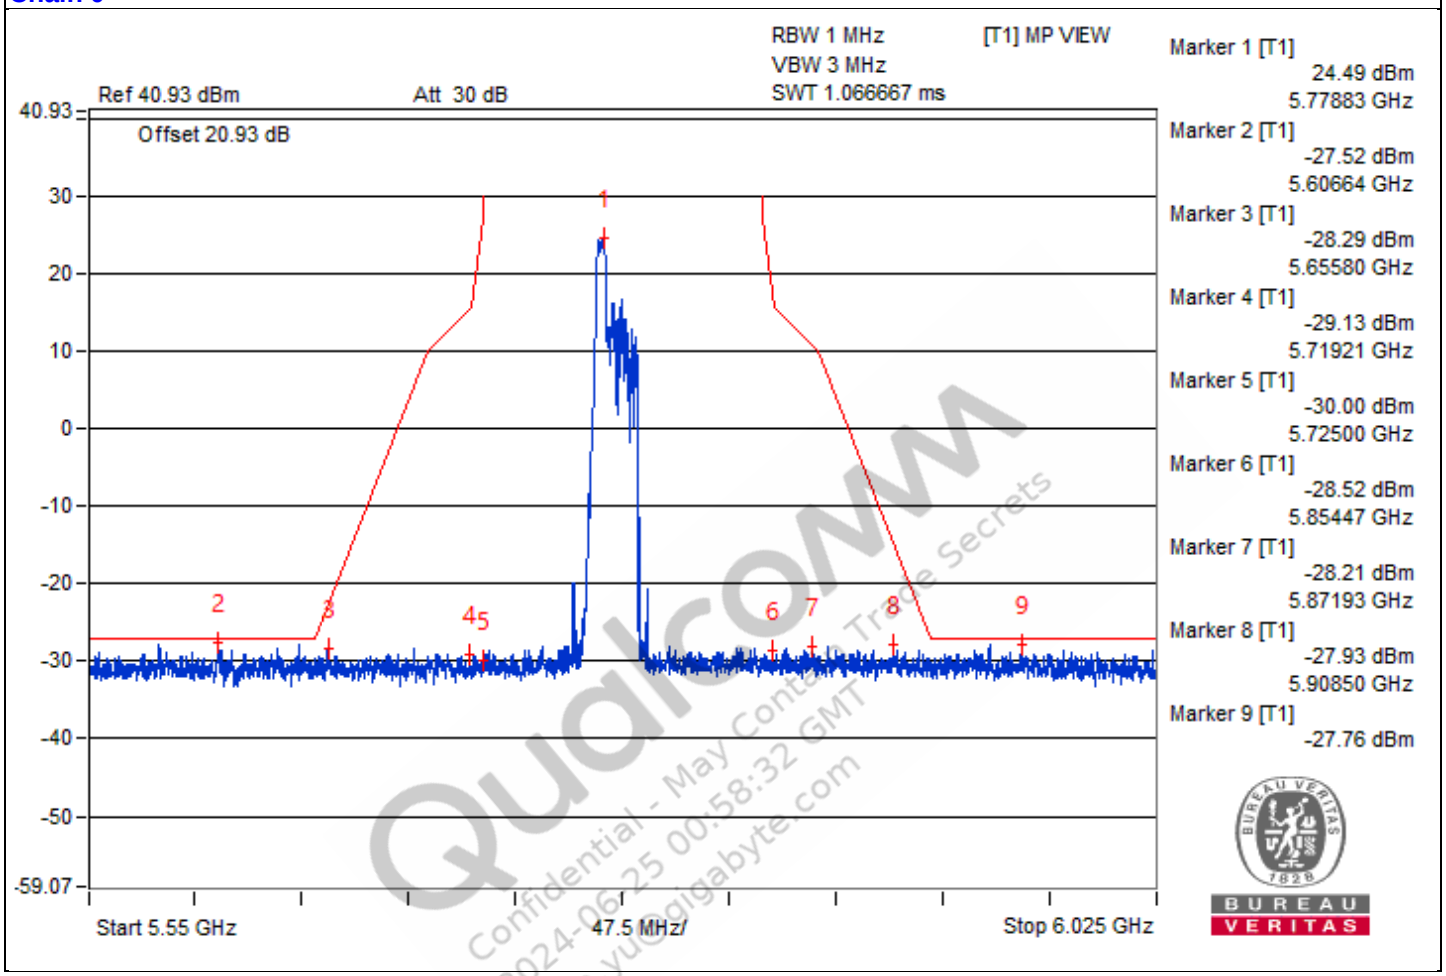

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

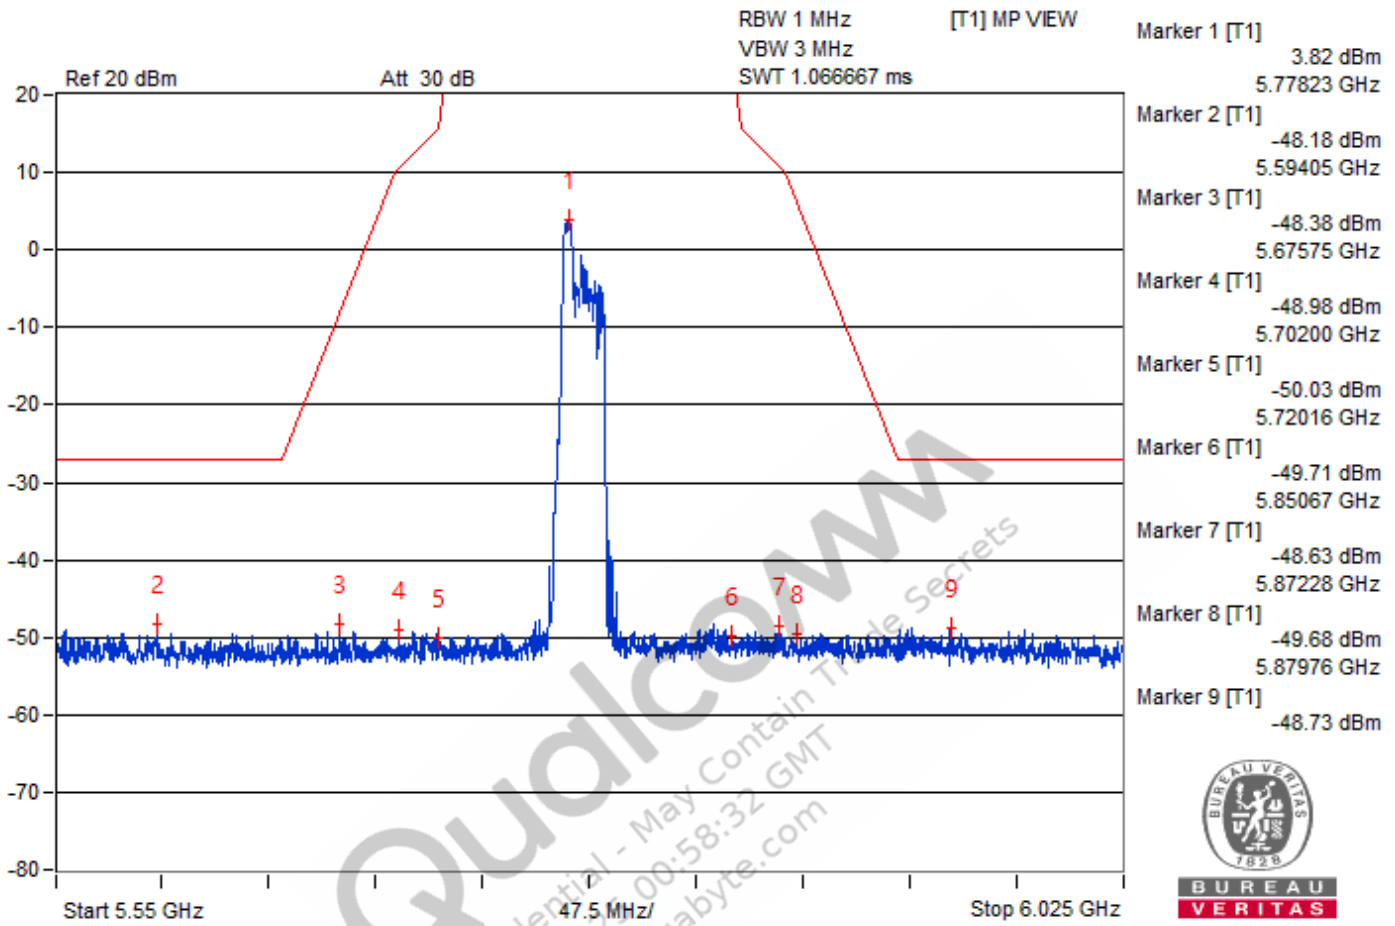

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT20) 52-tone RU - Channel 165

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3878.12	60.41 PK	74	-13.59	-46.47	-45.64	8.17	-34.85
2	3865.62	49.77 AV	54	-4.23	-56.63	-56.71	8.17	-45.49
3	#7781.25	58.7 PK	68.2	-9.5	-47.38	-48.13	8.17	-36.56
4	11648.43	59.34 PK	74	-14.66	-46.6	-47.67	8.17	-35.92
5	11667.18	48.43 AV	54	-5.57	-57.98	-58.04	8.17	-46.83
6	#17460.31	49.32 PK	68.2	-18.88	-56.08	-58.5	8.17	-45.94


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

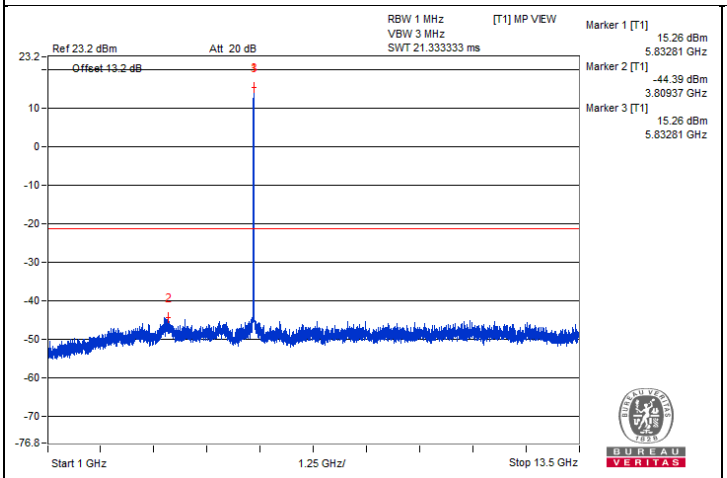


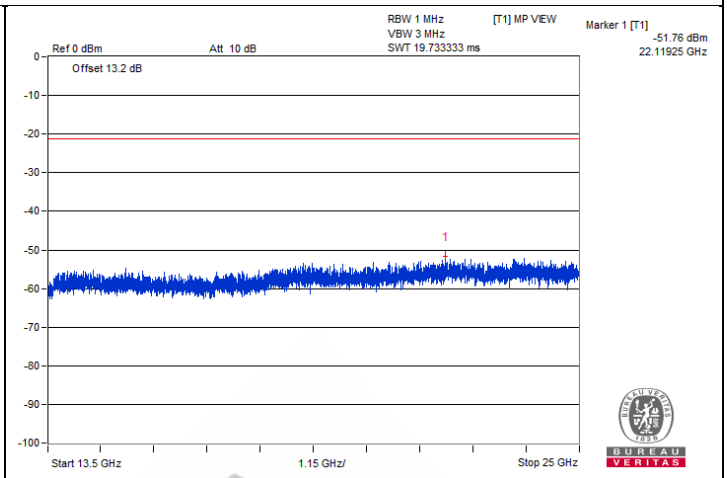

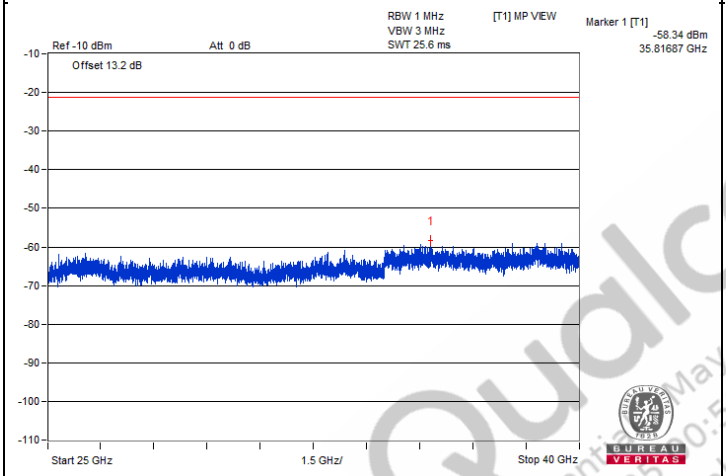

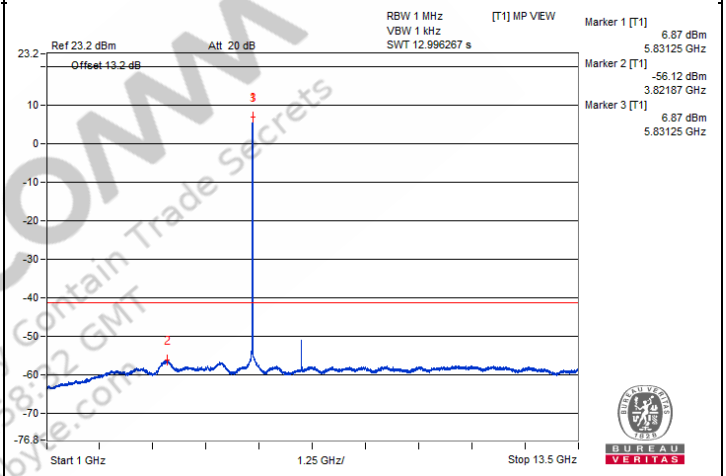


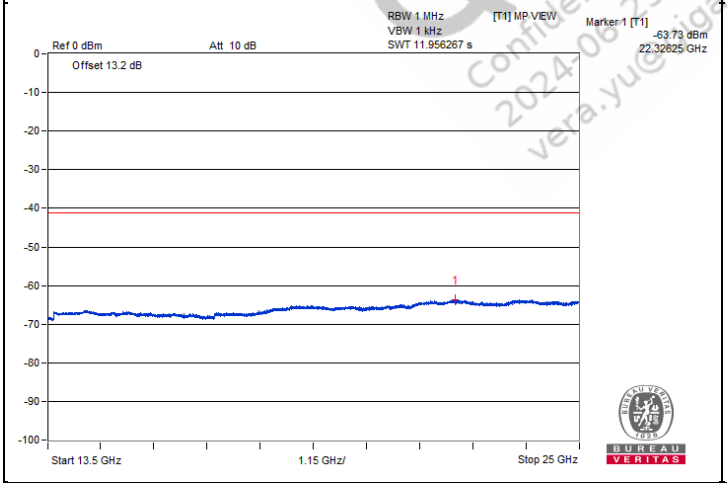


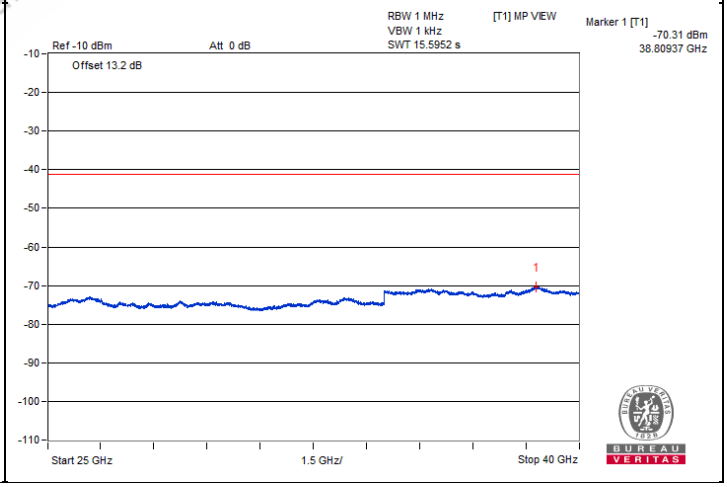



QualcOMM Confidential and May Contain Trade Secrets
2024-06-25 10:58:02 GMT
vera.yue@gigabyte.com


Chain 1

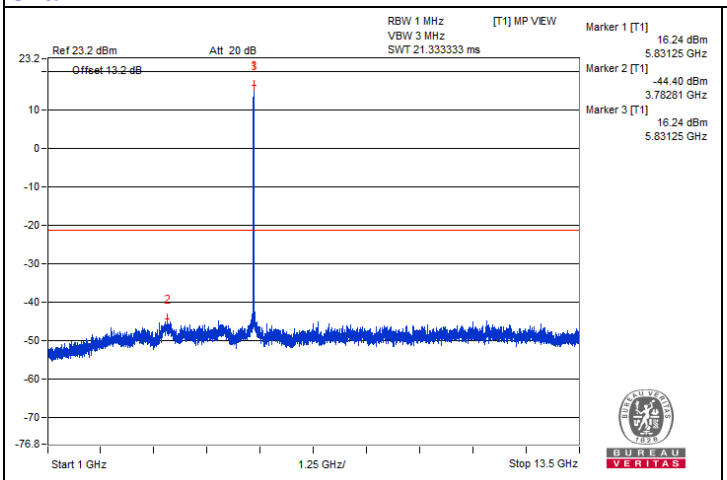


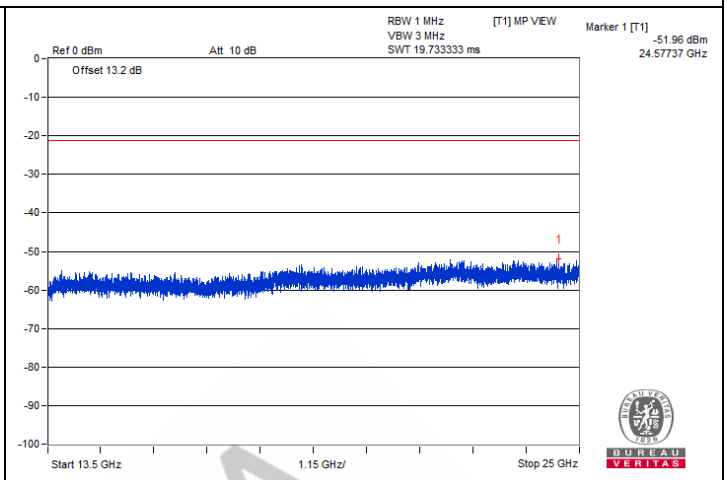

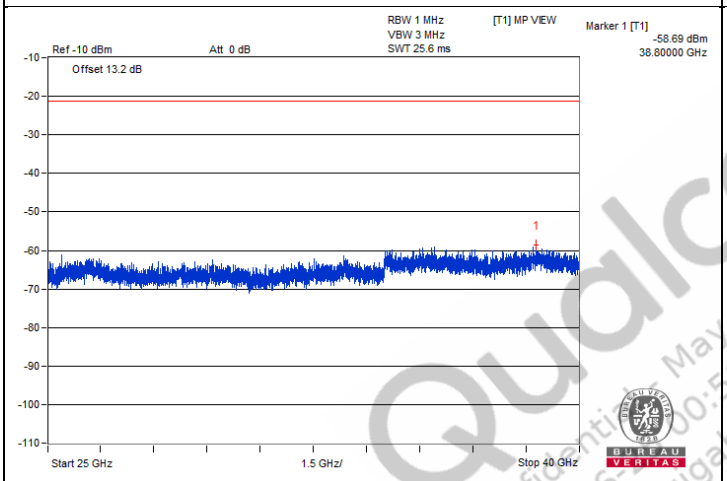

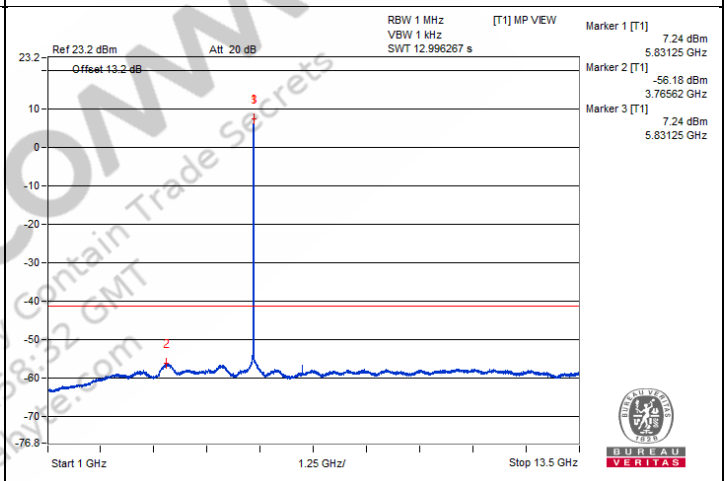

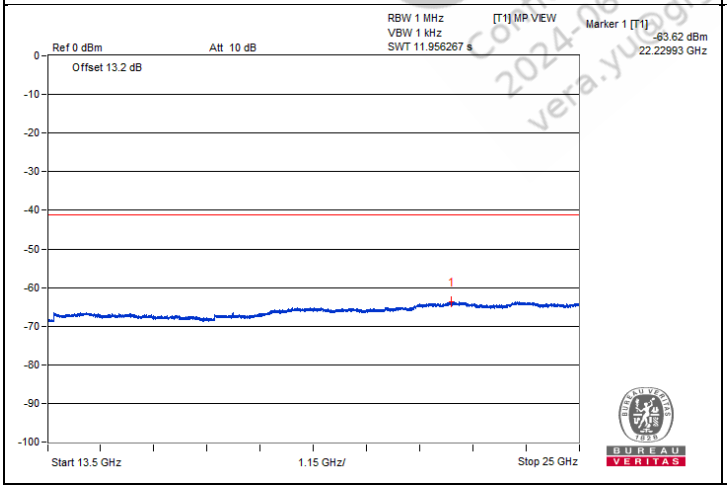


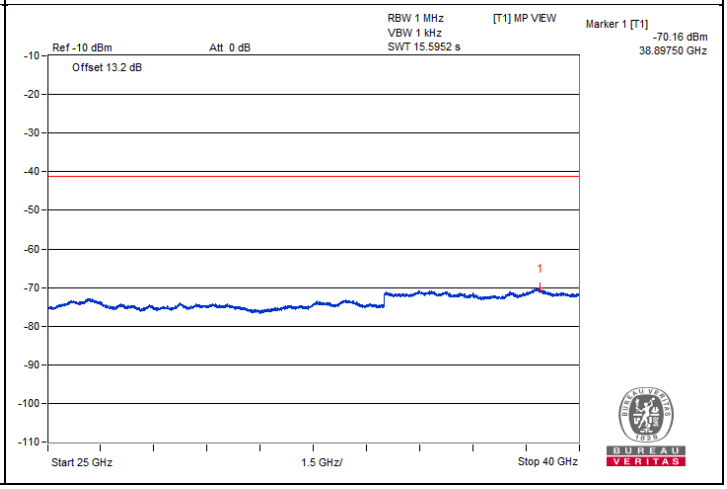

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

Chain 0

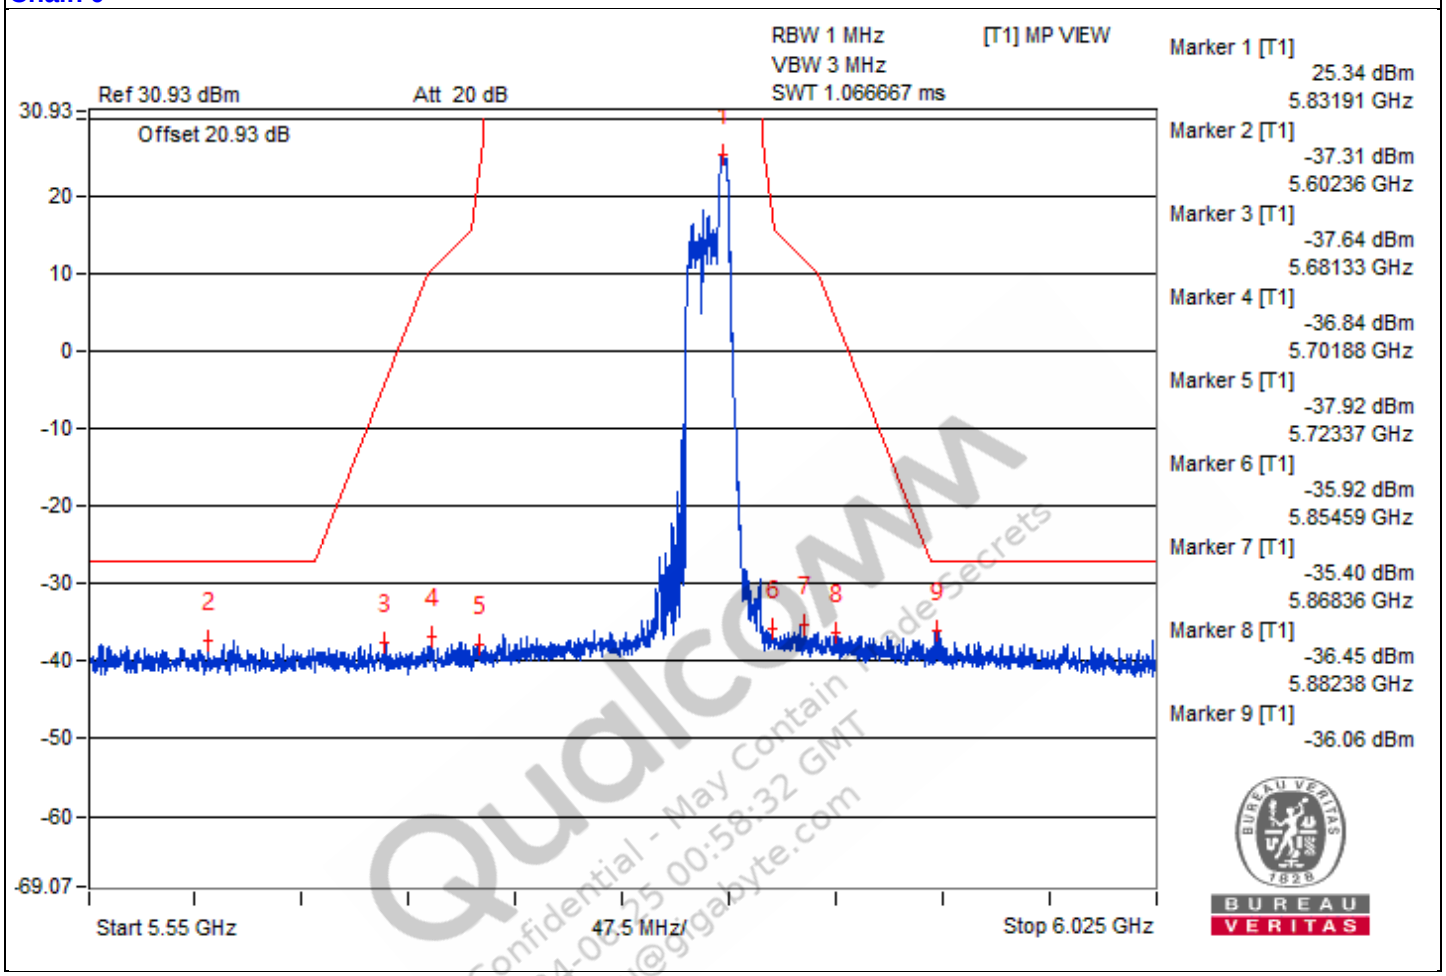

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

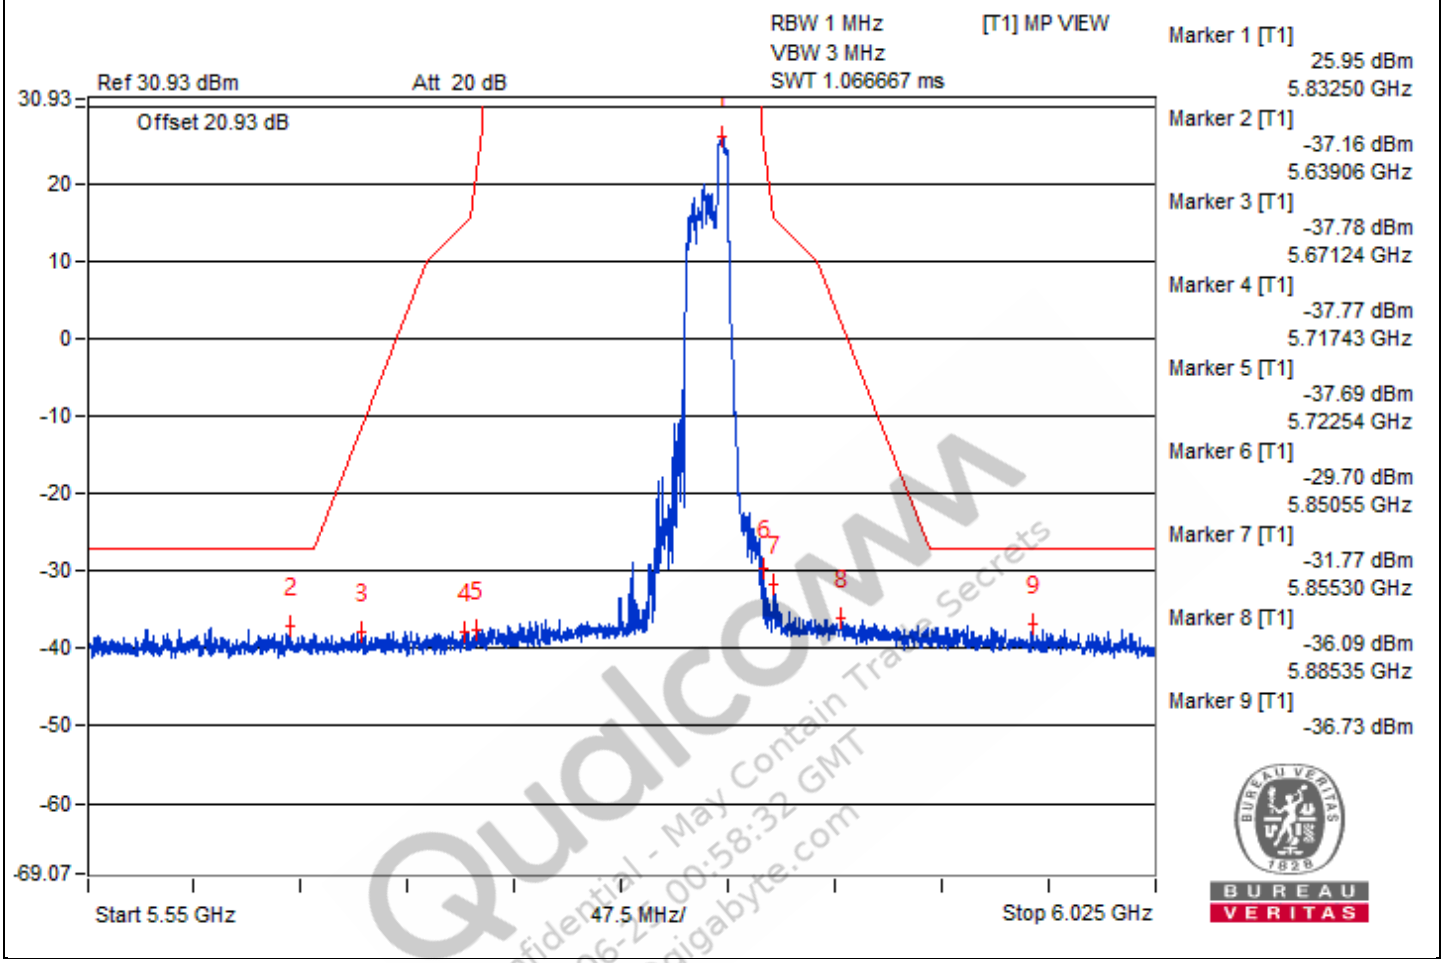

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT20) 106-tone RU - Channel 36

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3446.87	58.56 PK	68.2	-9.64	-47.14	-48.78	8.17	-36.70
2	#6892.18	57.71 PK	68.2	-10.49	-48.33	-49.18	8.17	-37.55
3	#10354.68	59.31 PK	68.2	-8.89	-46.1	-48.48	8.17	-35.95
4	15554.18	48.93 PK	74	-25.07	-57.07	-58	8.17	-46.33
5	15551.31	39.04 AV	54	-14.96	-67.38	-67.43	8.17	-56.22


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

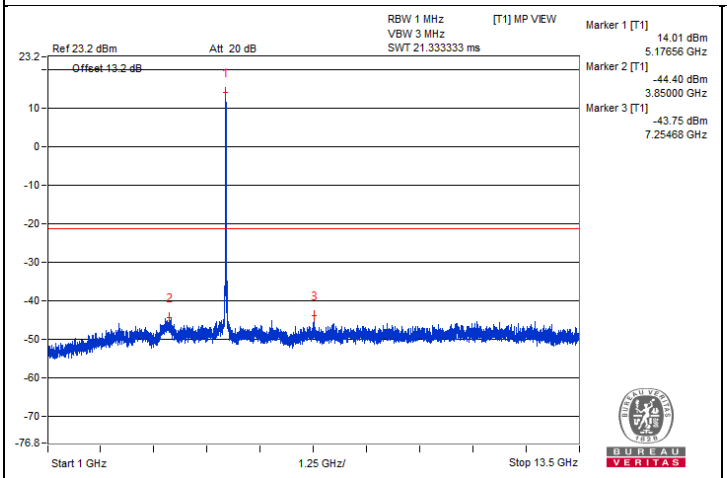


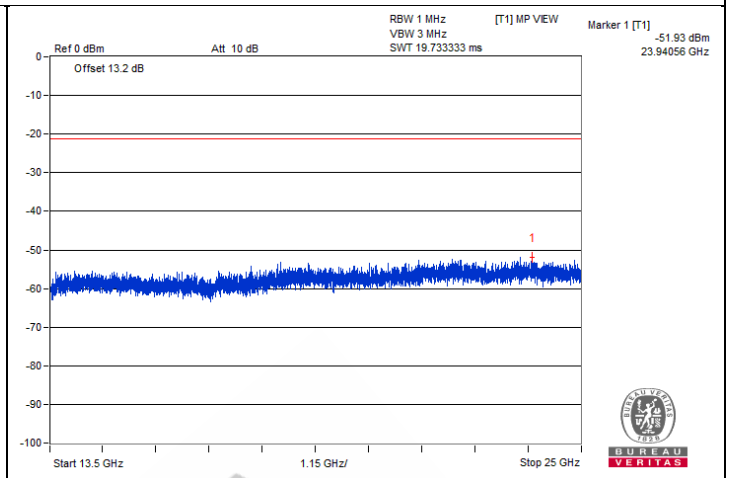

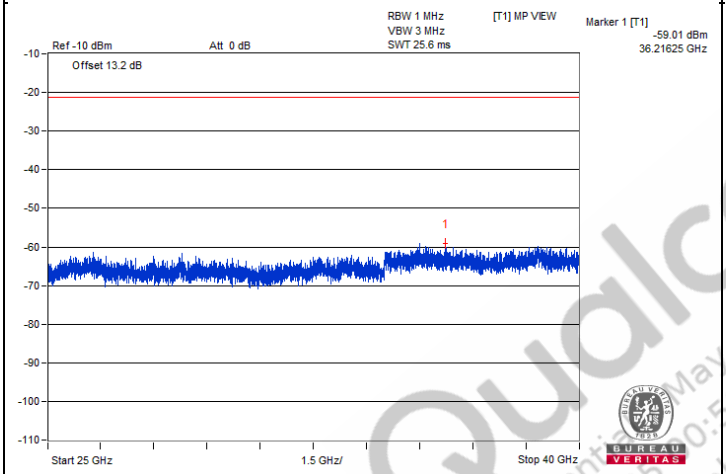

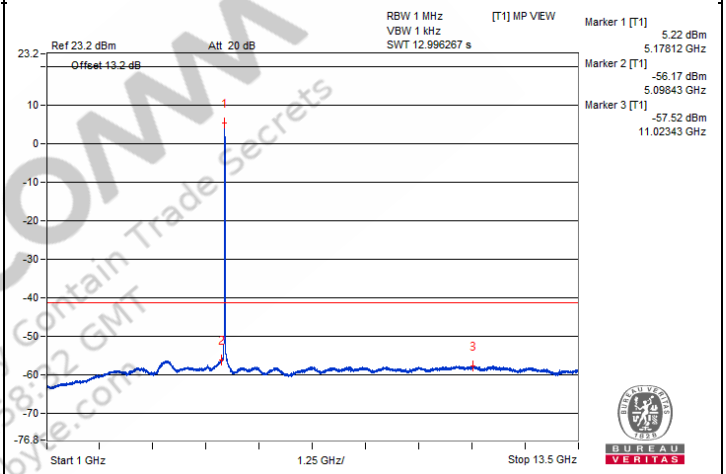


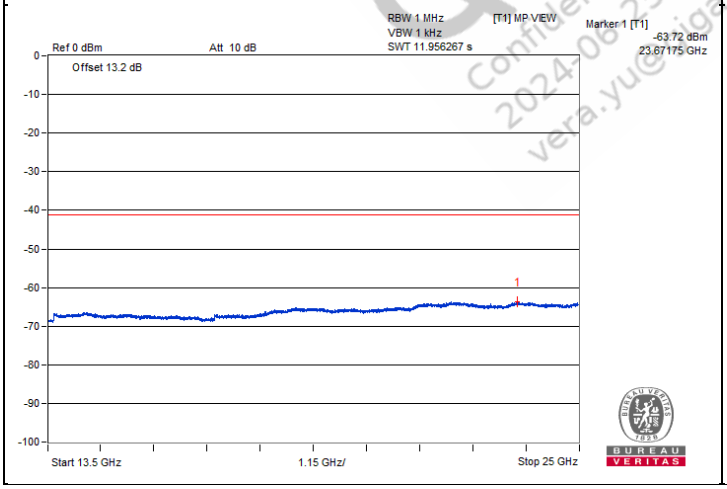


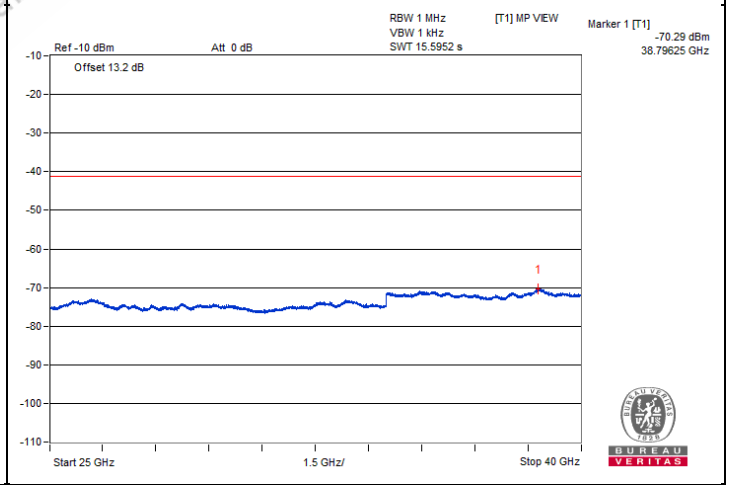



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

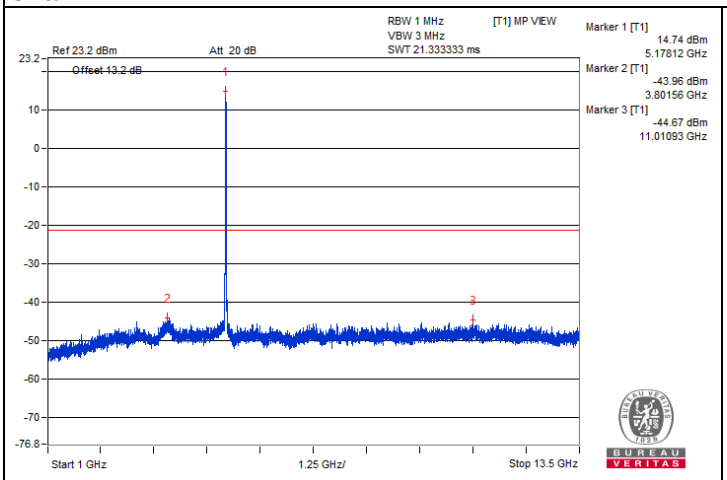


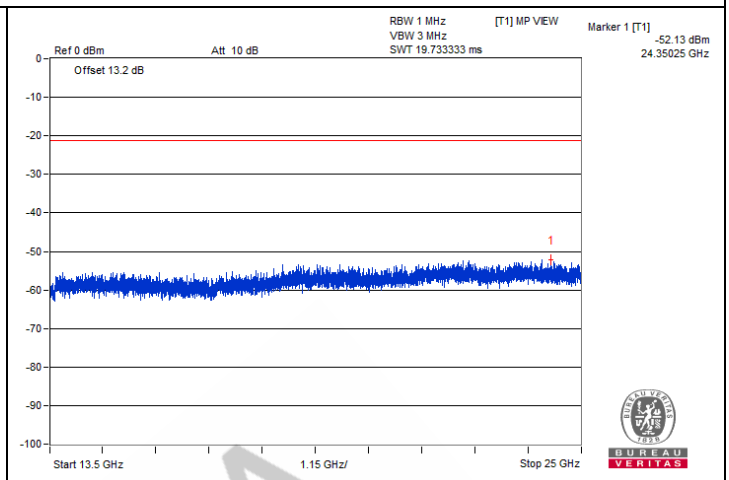

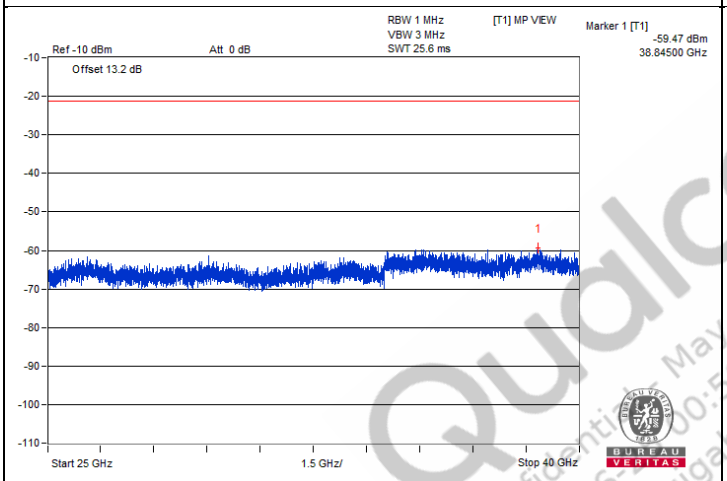

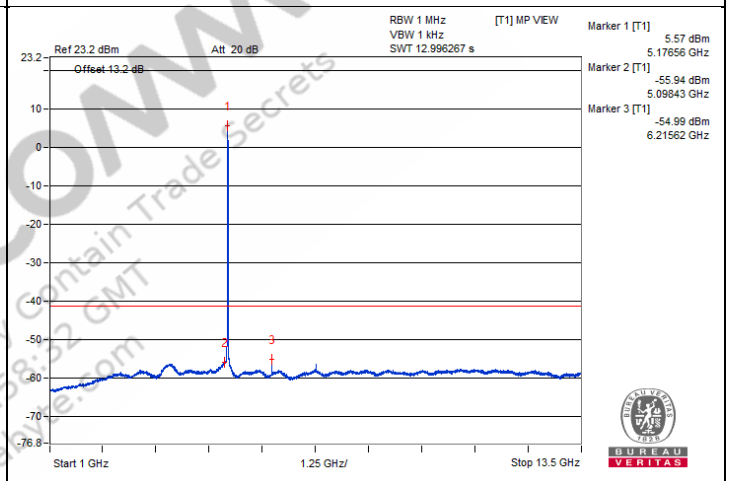

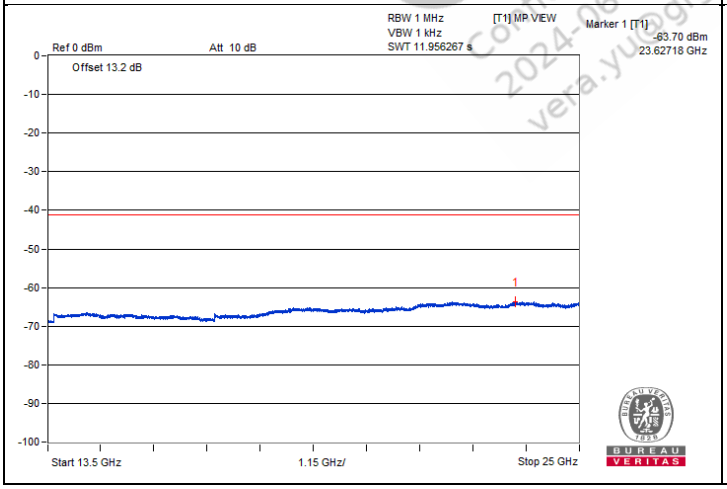

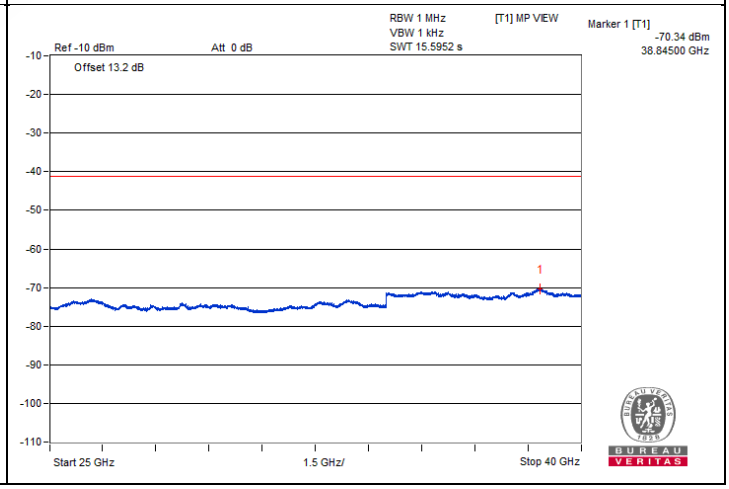

QualcOMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5146.72	71.23 PK	74	-2.77	-37.54	-31.32	6.36	-24.03
2	5150	49.19 AV	54	-4.81	-55.51	-55.37	6.36	-46.07

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

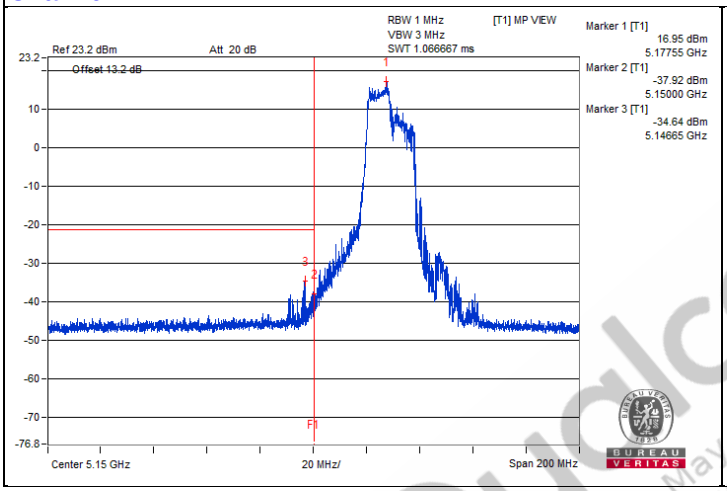

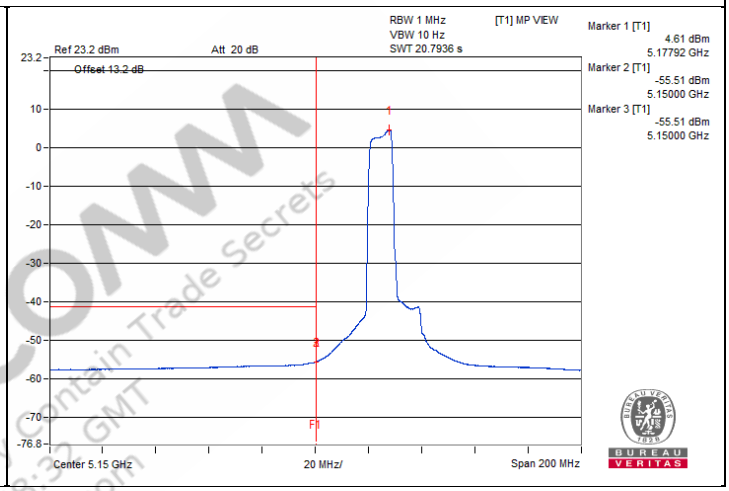

Chain 1

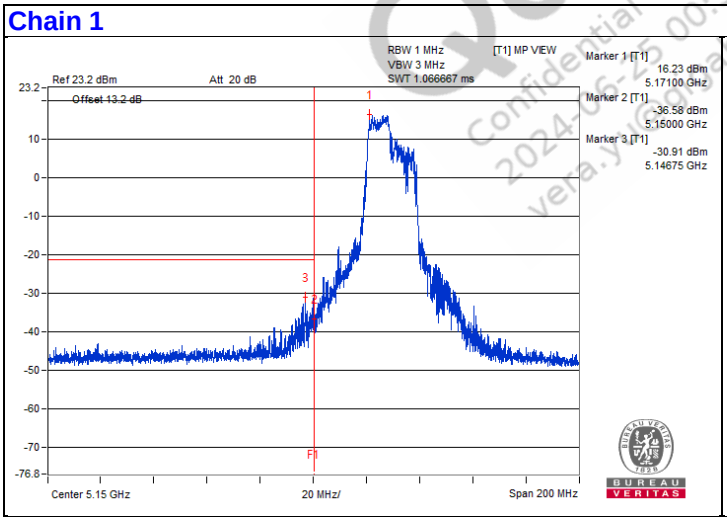

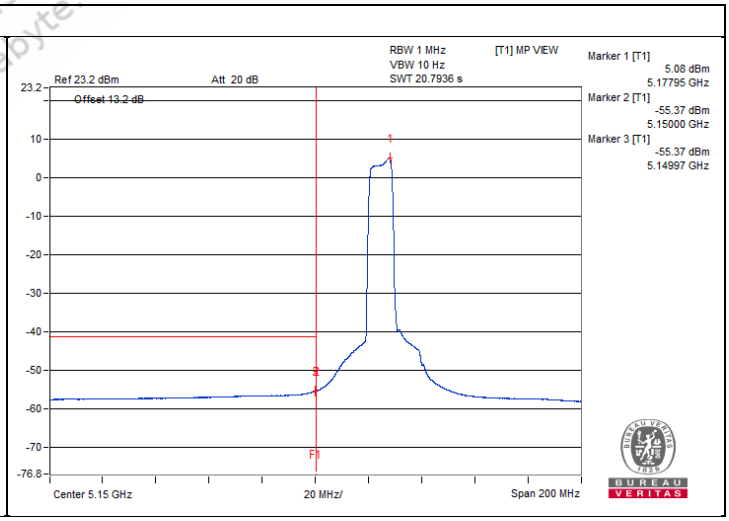

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.y@compliancyte.com

802.11be (EHT20) 106-tone RU - Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3471.87	58.39 PK	68.2	-9.81	-49.28	-47.09	8.17	-36.87
2	#6925	58.26 PK	68.2	-9.94	-47.88	-48.51	8.17	-37.00
3	#10387.5	59.32 PK	68.2	-8.88	-48.04	-46.37	8.17	-35.94
4	15590.12	49.72 PK	74	-24.28	-56.08	-57.46	8.17	-45.54
5	15603.06	39.04 AV	54	-14.96	-67.43	-67.38	8.17	-56.22


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

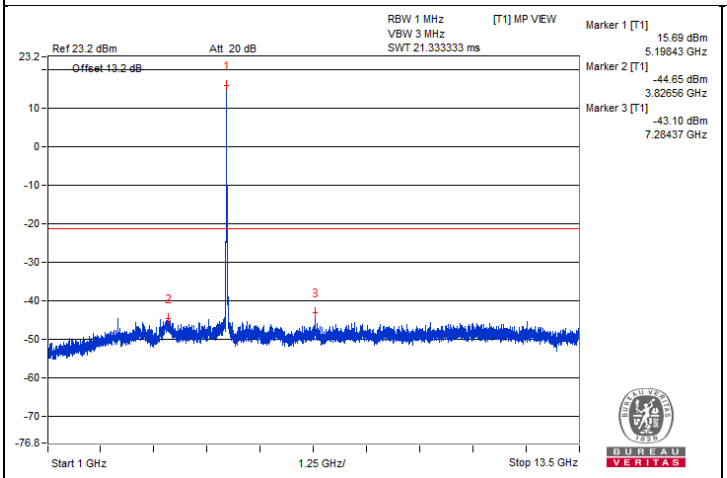


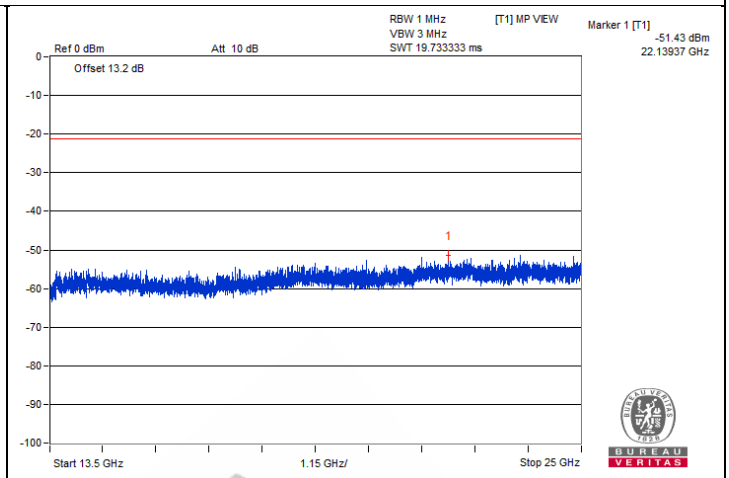

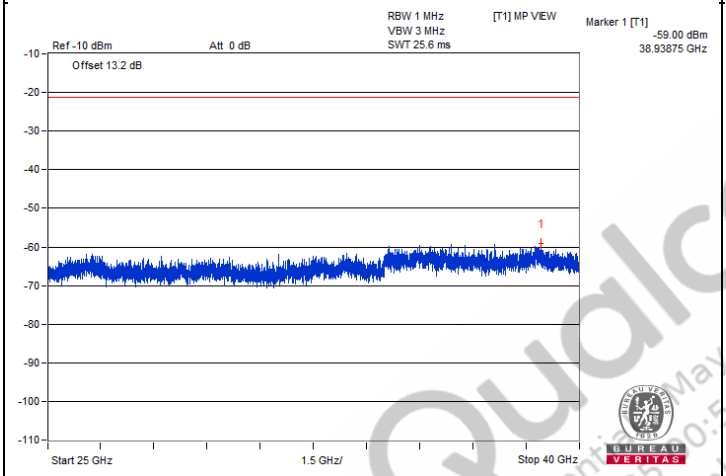

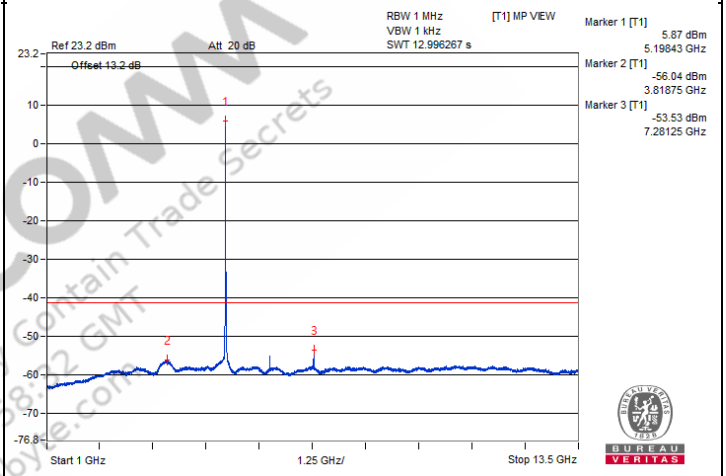


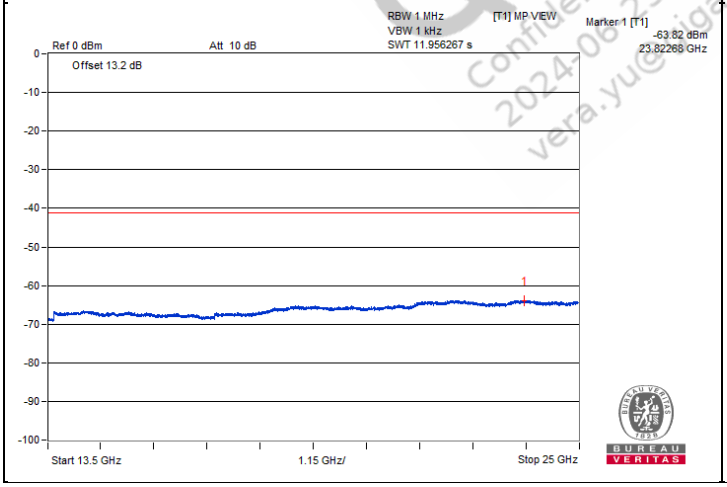


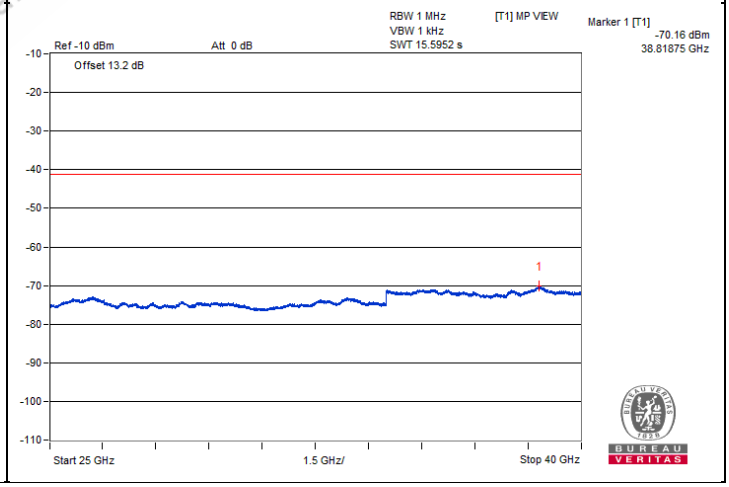



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

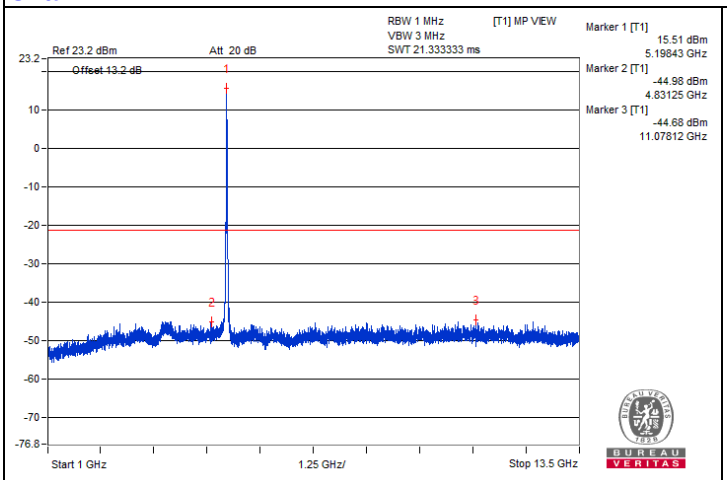


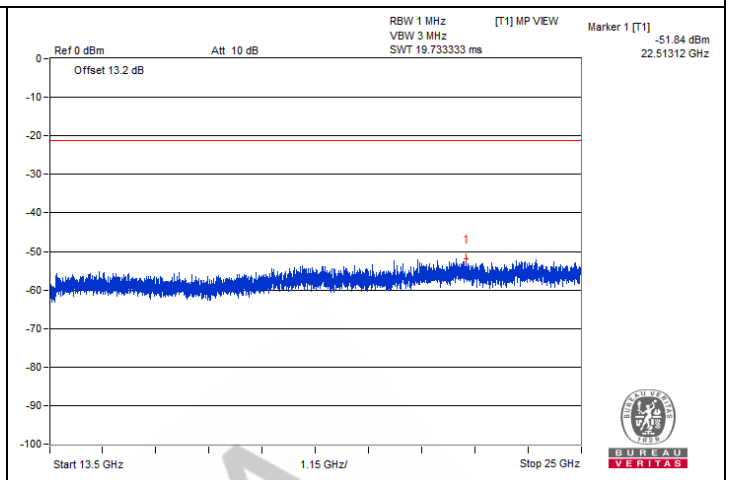

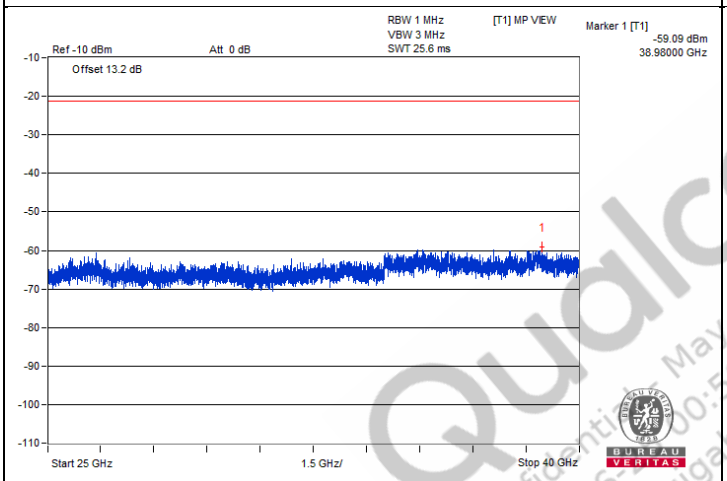

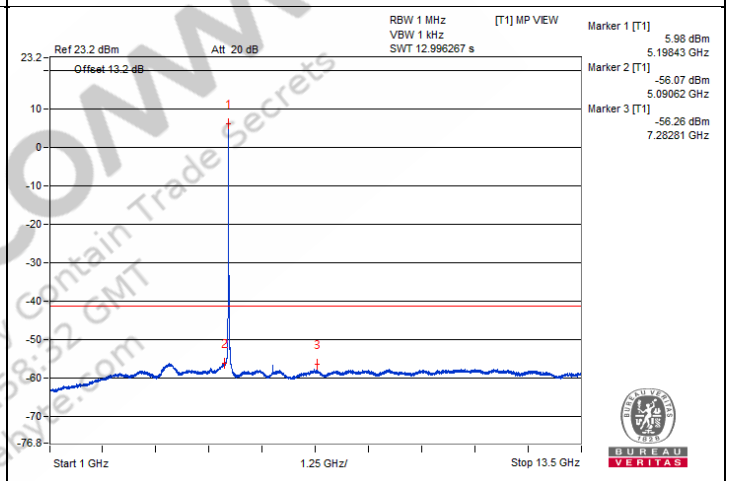

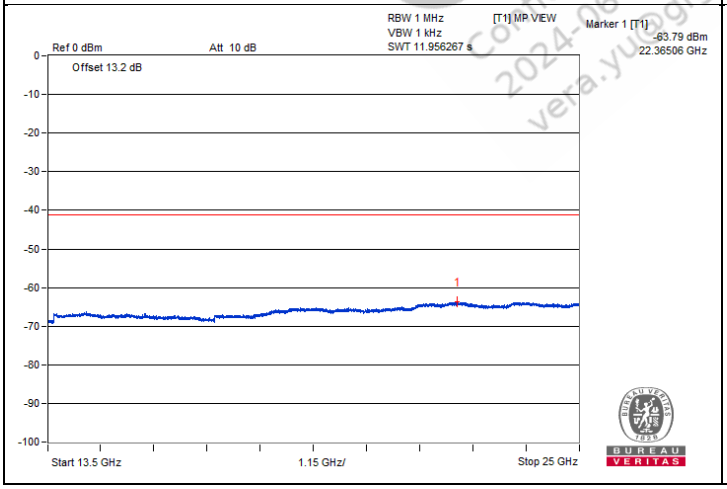

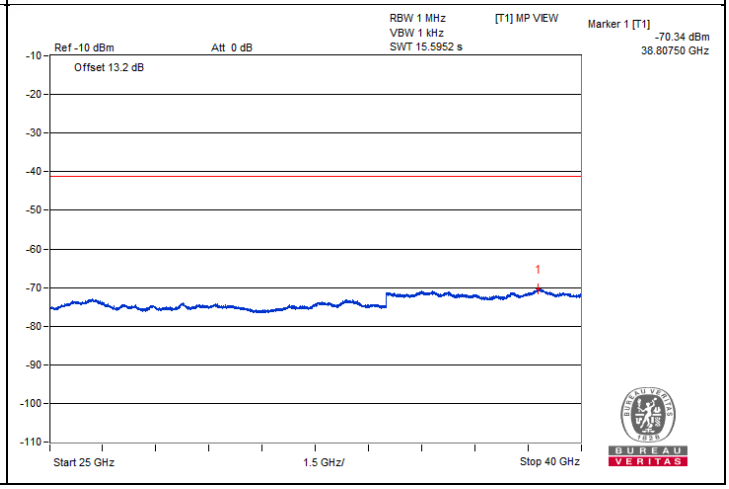

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5149.07	65.19 PK	74	-8.81	-47	-36.83	6.36	-30.07
2	5149.85	48.35 AV	54	-5.65	-56.53	-56.04	6.36	-46.91

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

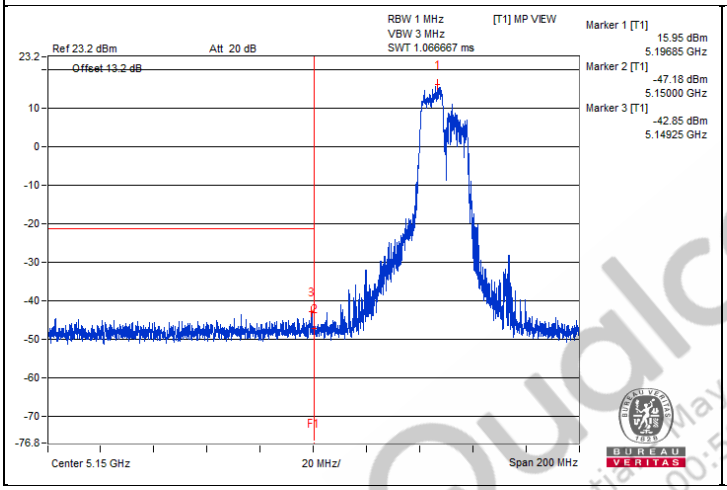

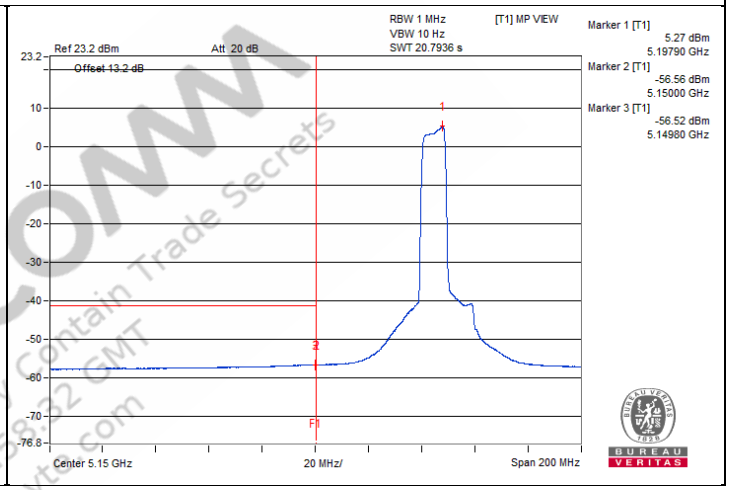

Chain 1

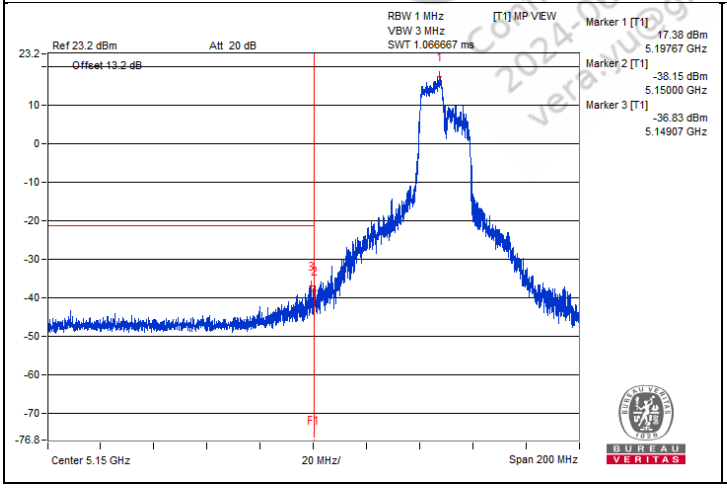

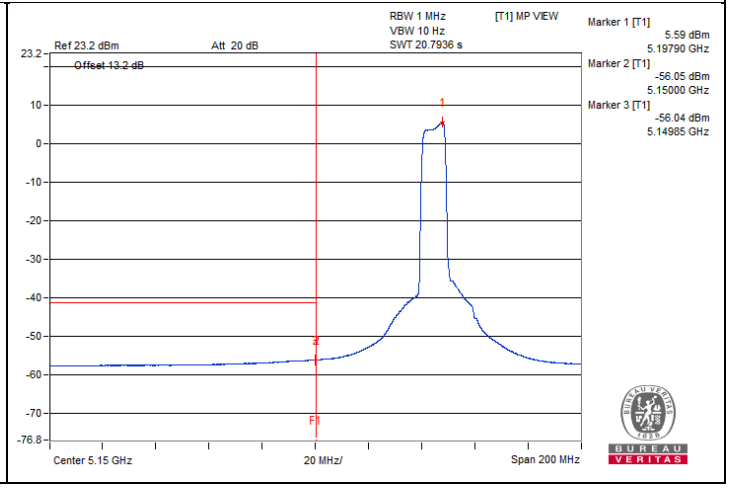

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.xu@gigabyte.com

802.11be (EHT20) 106-tone RU - Channel 48

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3473.43	57.49 PK	68.2	-10.71	-50.64	-47.74	8.17	-37.77
2	#7006.25	58.89 PK	68.2	-9.31	-49.11	-46.4	8.17	-36.37
3	#10487.5	59.18 PK	68.2	-9.02	-46.78	-47.79	8.17	-36.08
4	15736.75	49.03 PK	74	-24.97	-56.56	-58.48	8.17	-46.23
5	15706.56	39.09 AV	54	-14.91	-67.37	-67.34	8.17	-56.17


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

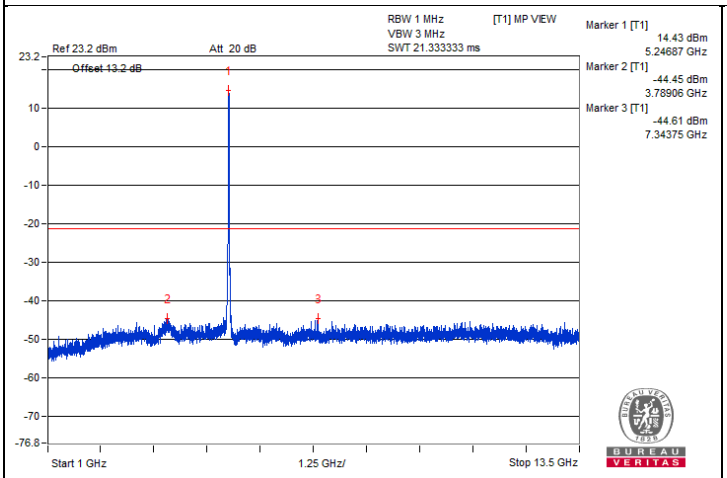


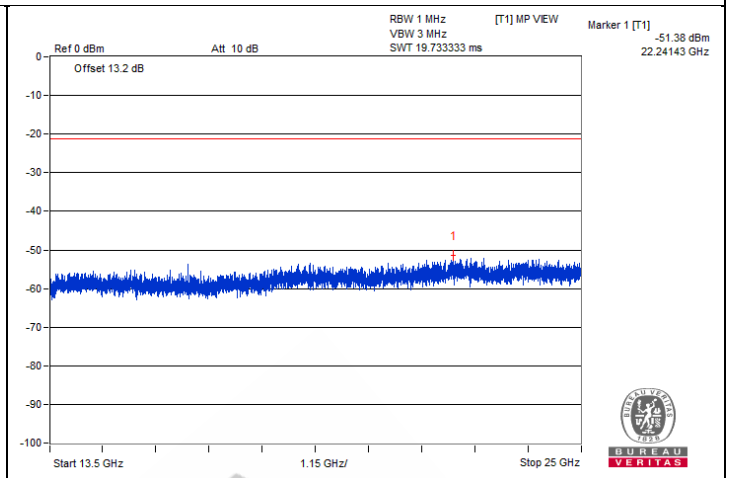

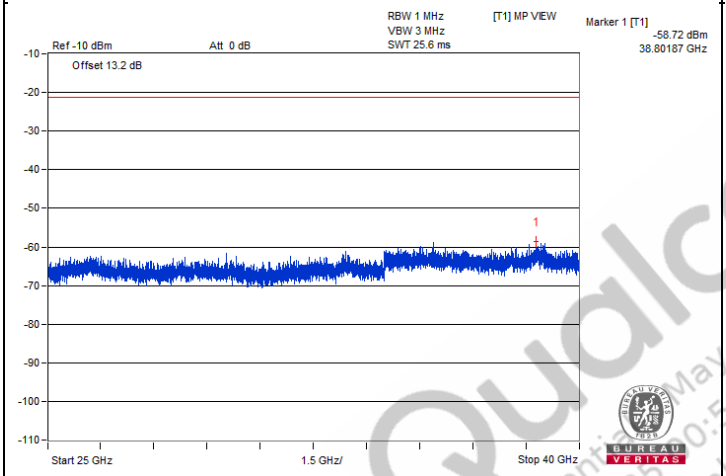

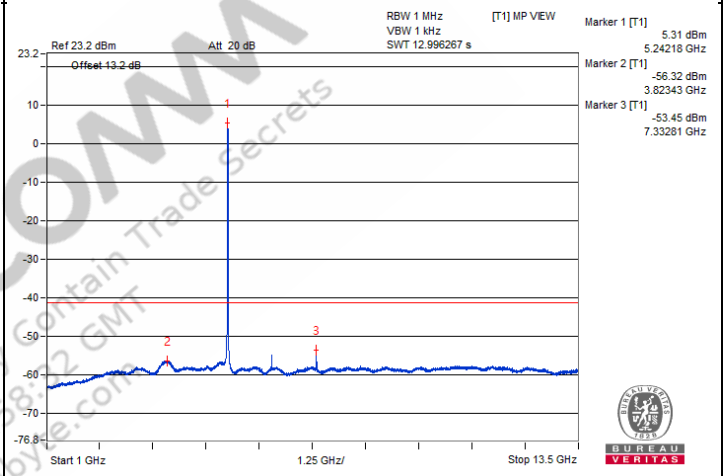


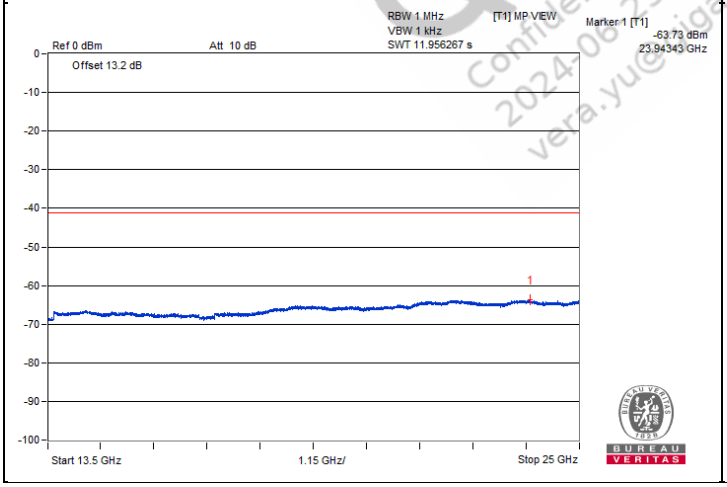


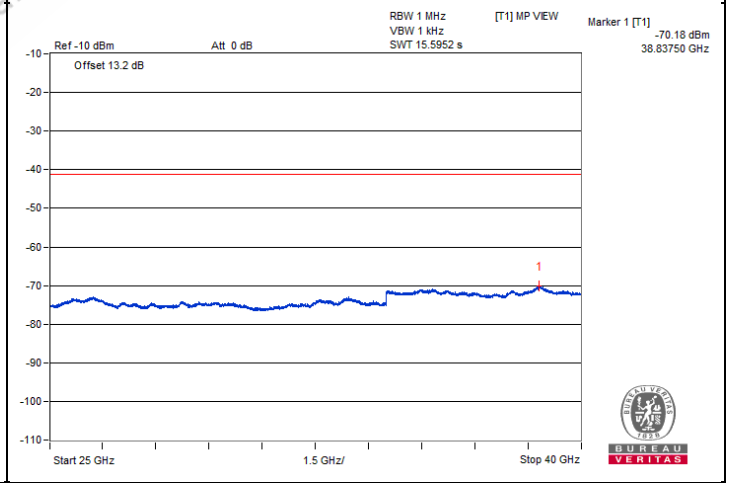



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:02 GMT
vera.yue@gigabyte.com


Chain 1

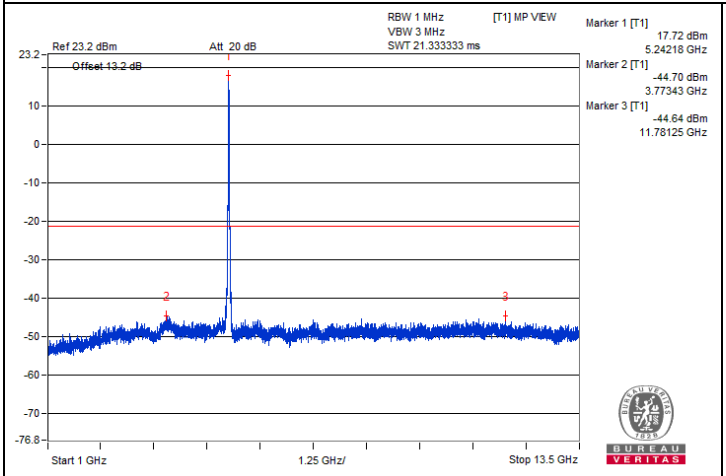


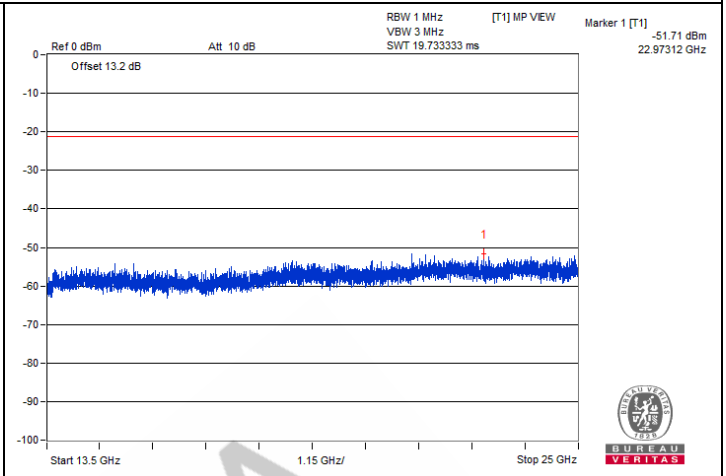

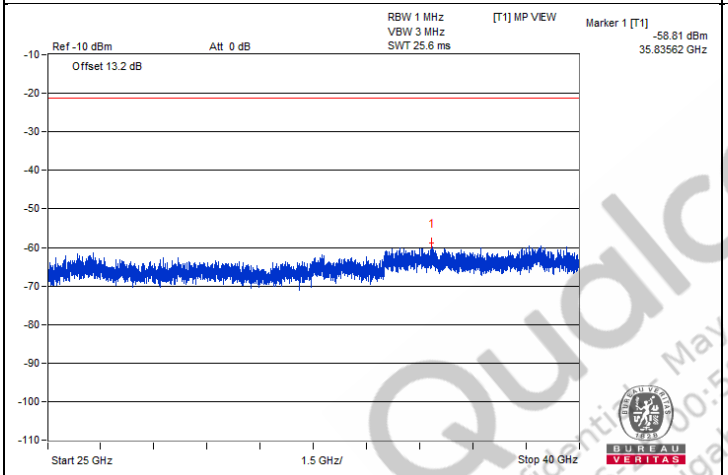

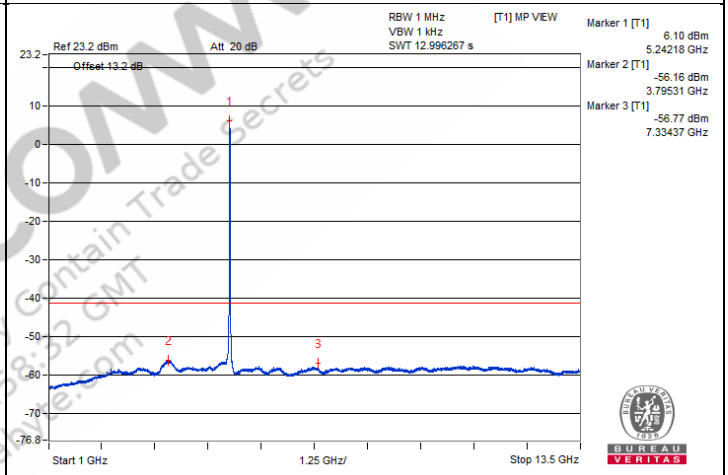

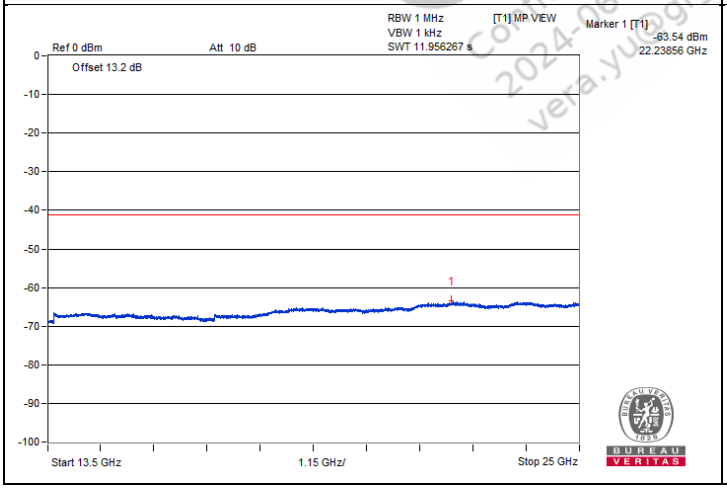

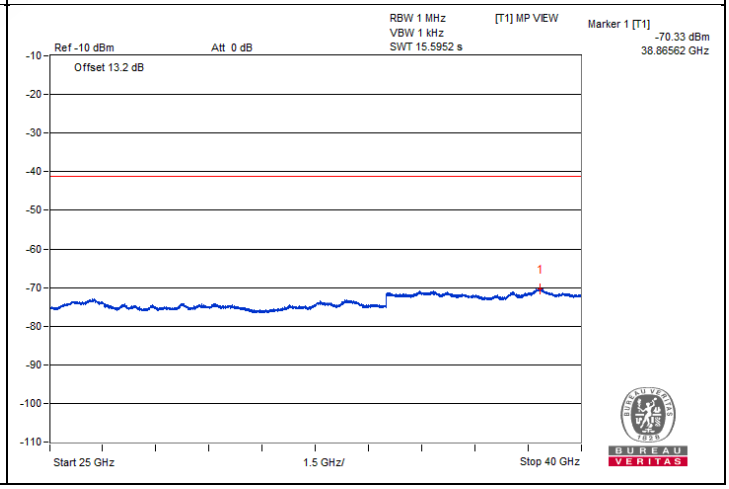

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5093.27	59.71 PK	74	-14.29	-43.34	-47.42	6.36	-35.55
2	5122.1	46.94 AV	54	-7.06	-57.76	-57.63	6.36	-48.32

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

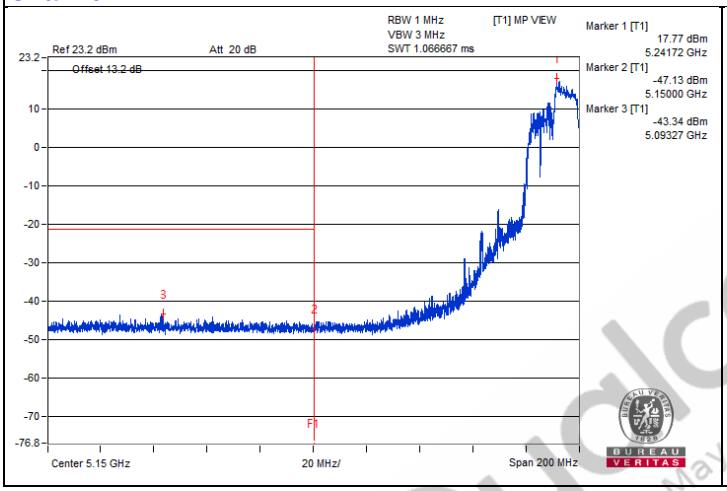

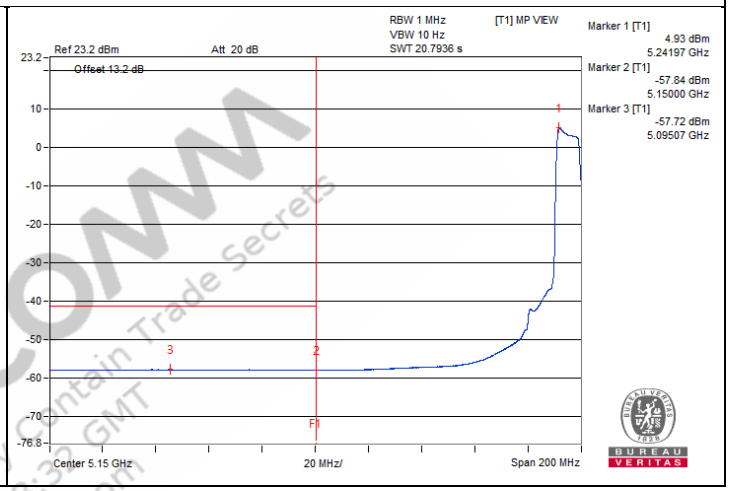

Chain 1

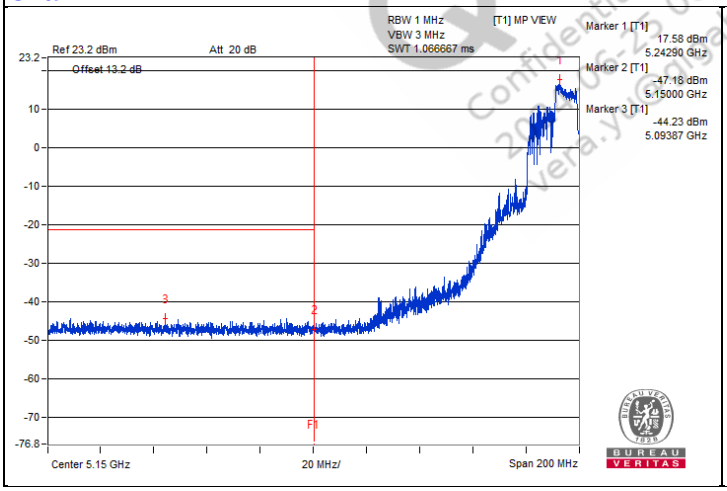

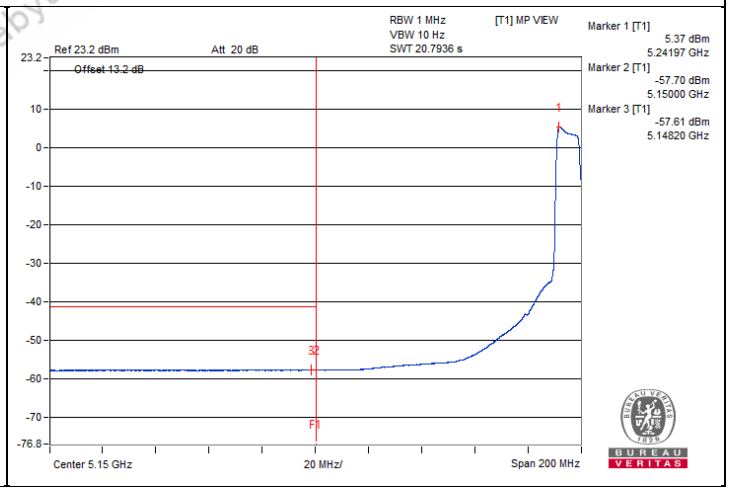

Qualcomm Confidential - May Contain Trade Secrets 2021-06-25 00:58:33 GMT vera.yang@byte.com

802.11be (EHT20) 106-tone RU - Channel 52

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3498.43	57.35 PK	68.2	-10.85	-48.53	-49.73	8.17	-37.91
2	#7032.81	58.45 PK	68.2	-9.75	-48.77	-47.33	8.17	-36.81
3	#10506.25	59.09 PK	68.2	-9.11	-47.23	-47.47	8.17	-36.17
4	15797.12	48.44 PK	74	-25.56	-56.81	-59.64	8.17	-46.82
5	15785.62	38.85 AV	54	-15.15	-67.38	-67.82	8.17	-56.41


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

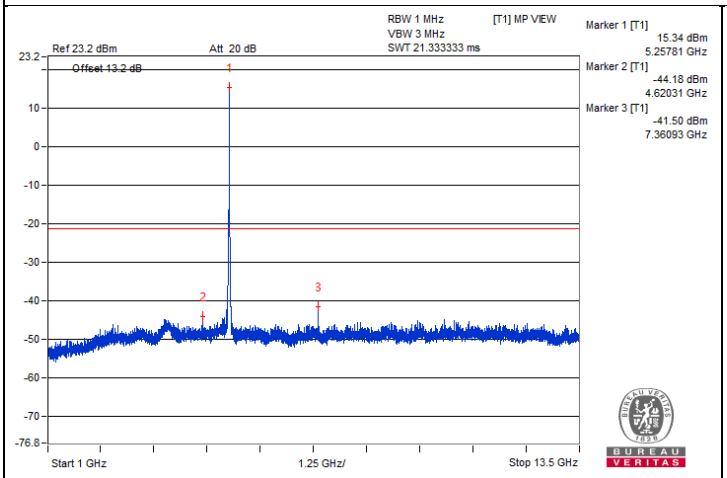


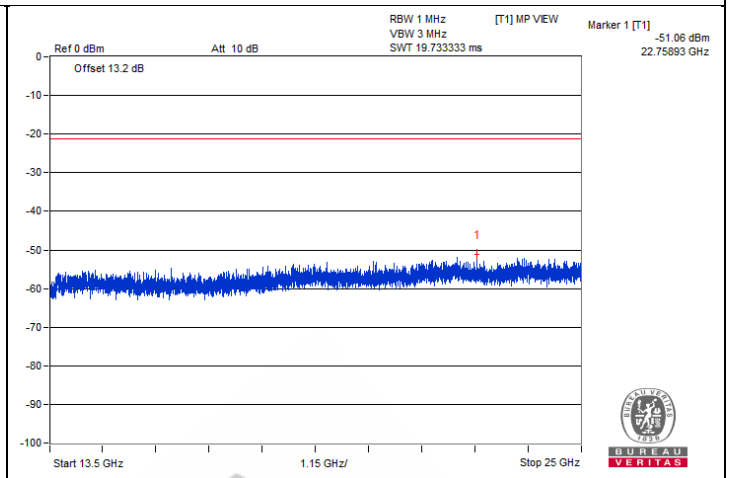

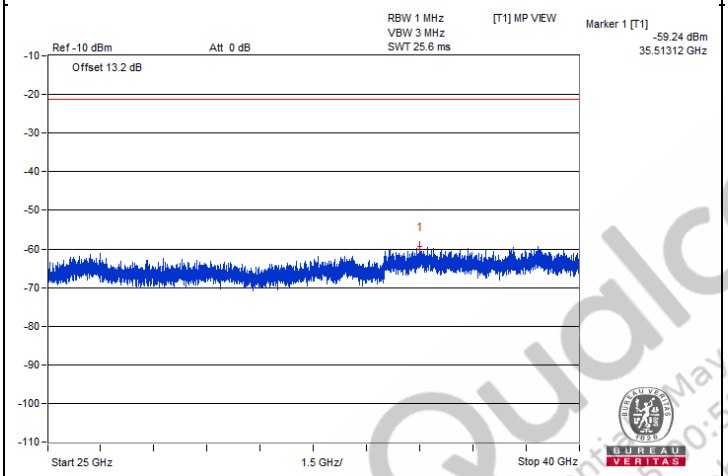

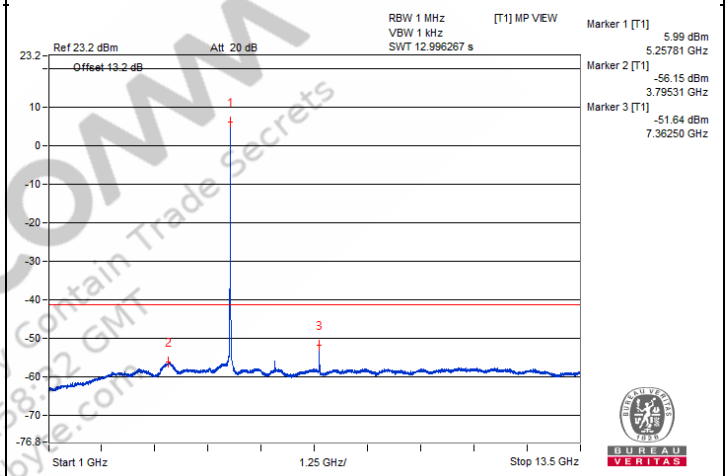


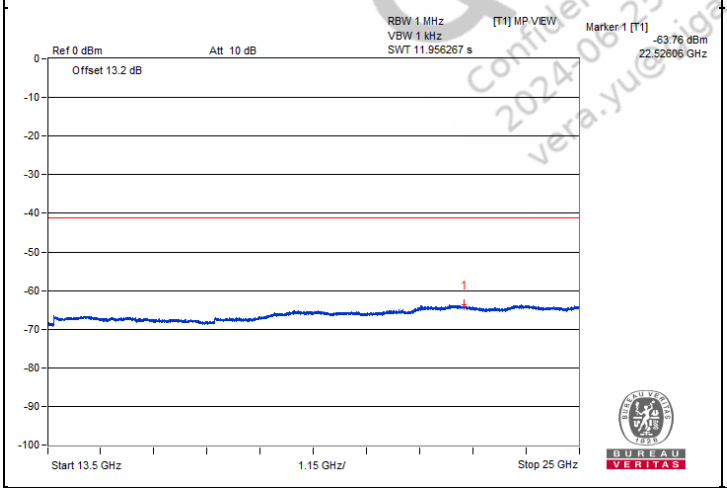


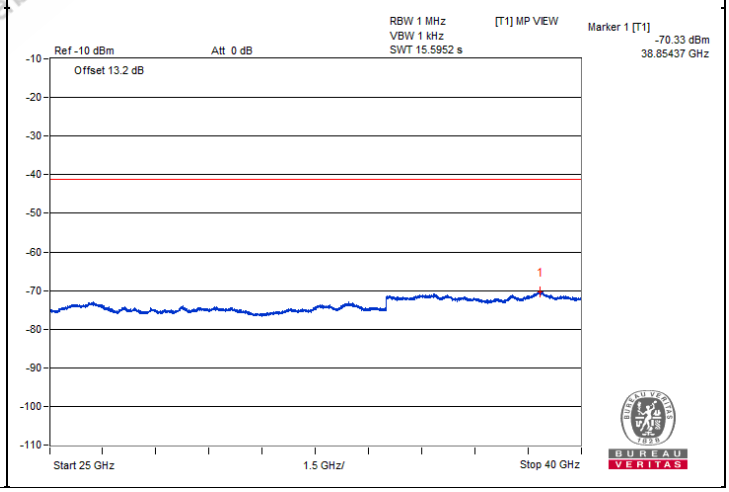



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

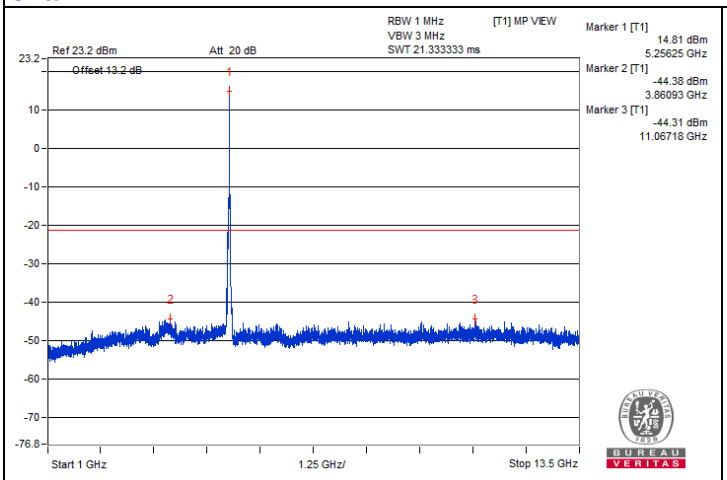


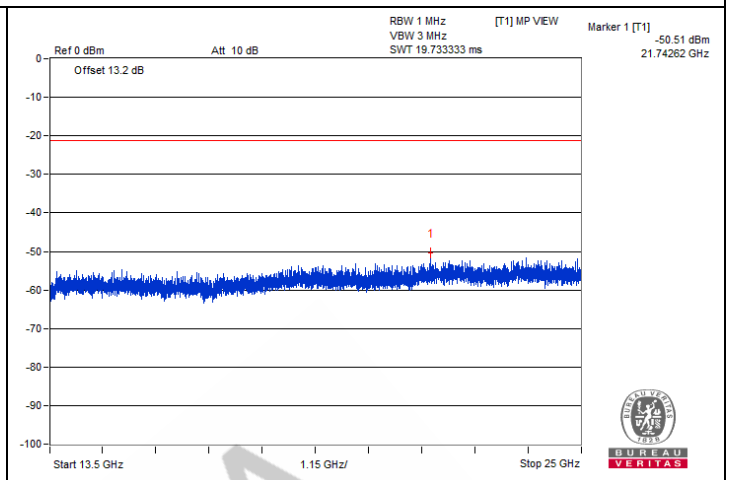

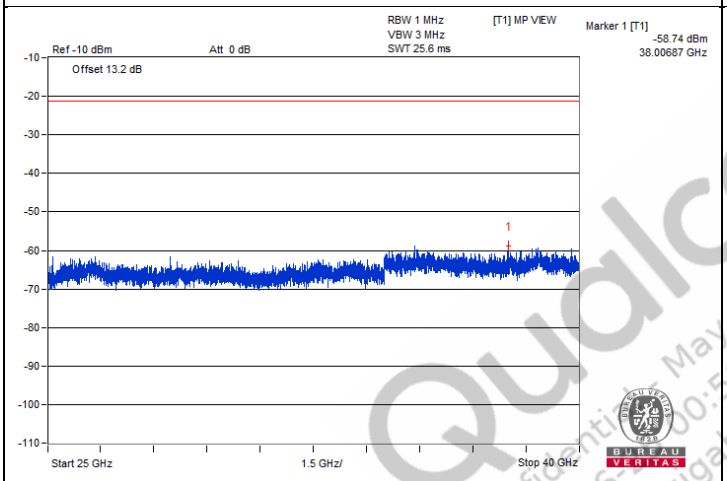

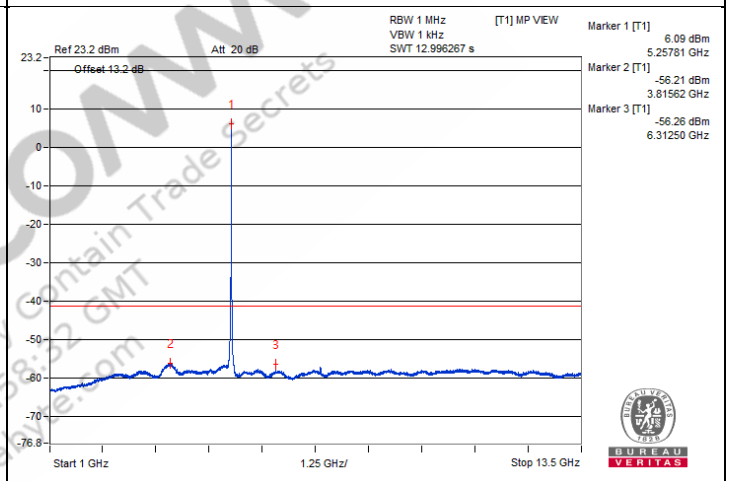

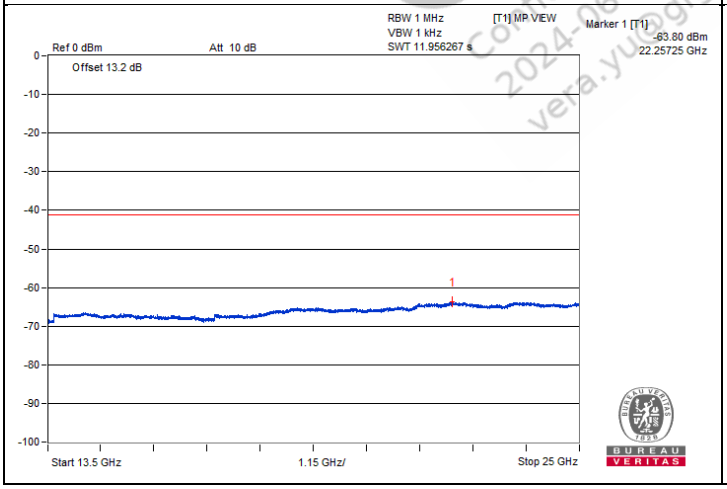

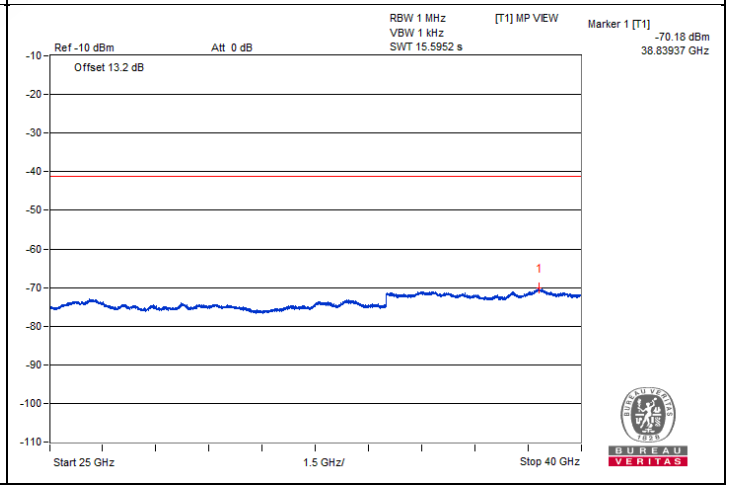

QualcOMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5372.75	58.35 PK	74	-15.65	-45.06	-48.18	6.43	-36.91
2	5350.05	45.83 AV	54	-8.17	-58.53	-59.25	6.43	-49.43


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

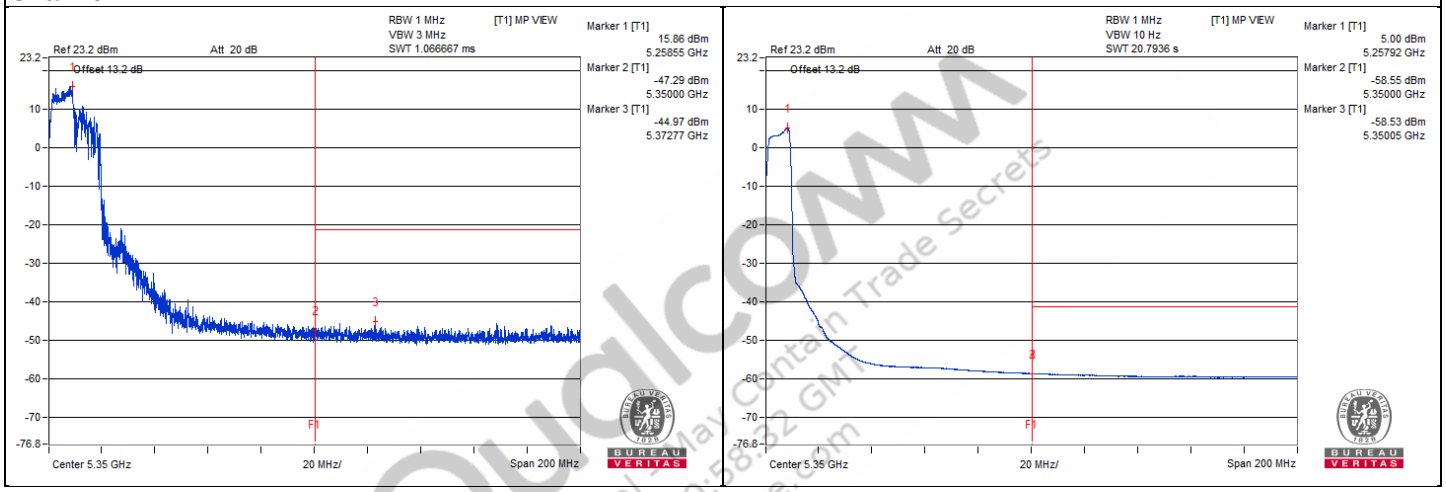

Chain 1

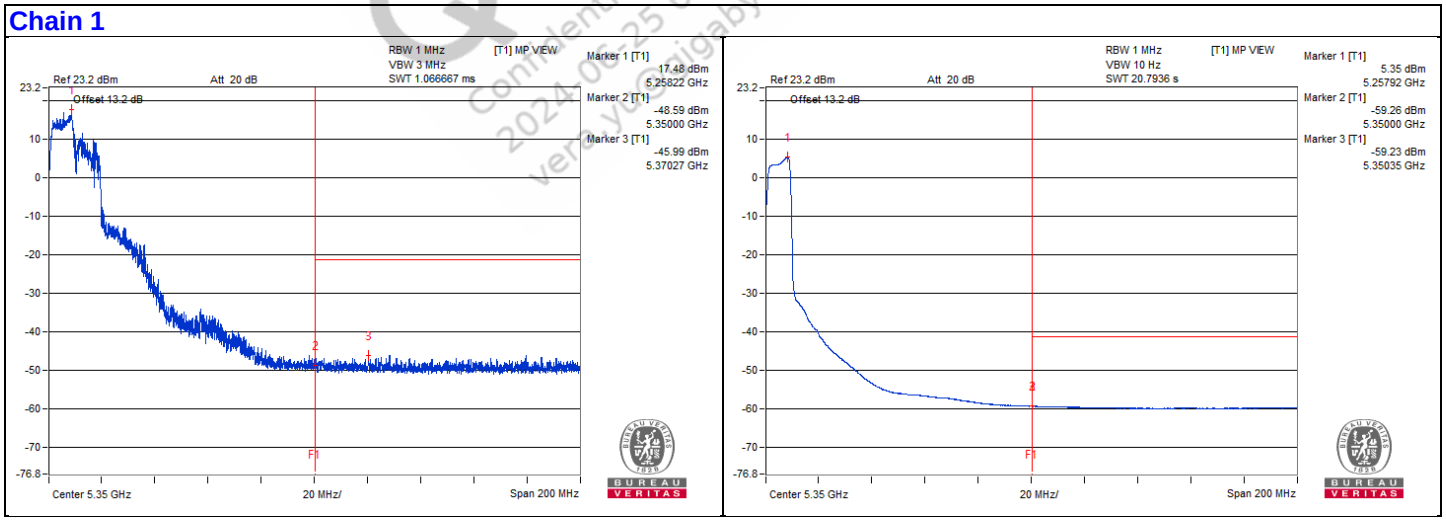

QualComm Confidential 2024-06-25 00:58:32 GMT Contain Trade Secrets Version: Gigabyte.com

802.11be (EHT20) 106-tone RU - Channel 60

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3550	58.18 PK	74	-15.82	-48.37	-48.15	8.17	-37.08
2	3548.43	47.26 AV	54	-6.74	-59.23	-59.14	8.17	-48.00
3	#7064.06	58.95 PK	68.2	-9.25	-47.28	-47.72	8.17	-36.31
4	#10596.87	59.51 PK	68.2	-8.69	-45.41	-49.29	8.17	-35.75
5	15890.56	47.97 PK	74	-26.03	-59.4	-57.71	8.17	-47.29
6	15894.87	38.65 AV	54	-15.35	-67.74	-67.84	8.17	-56.61


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

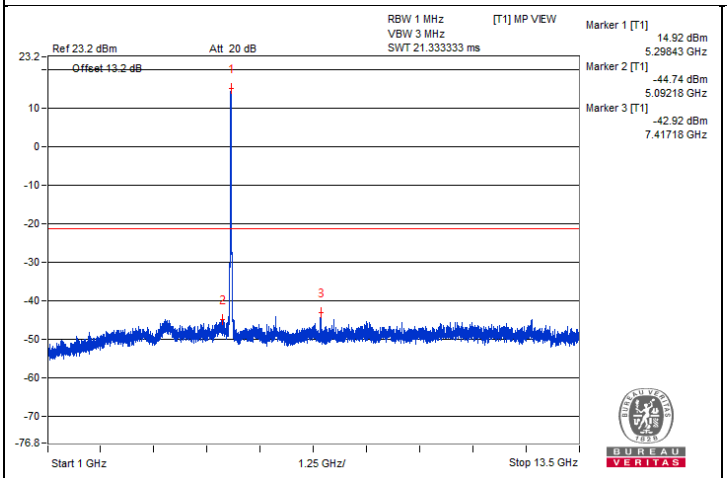


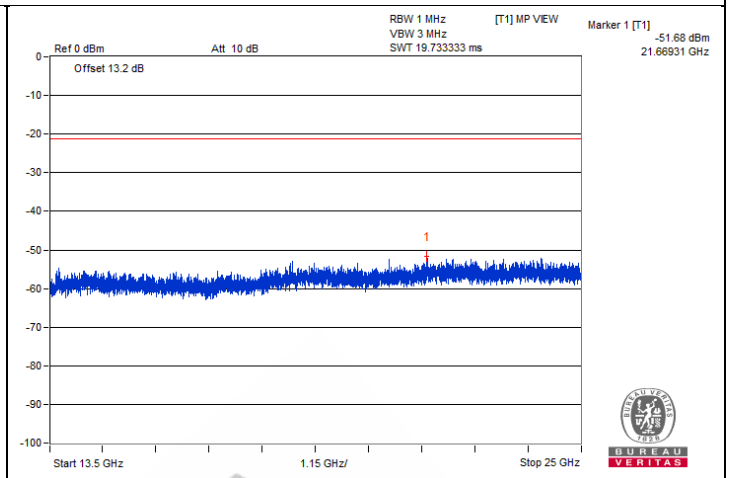

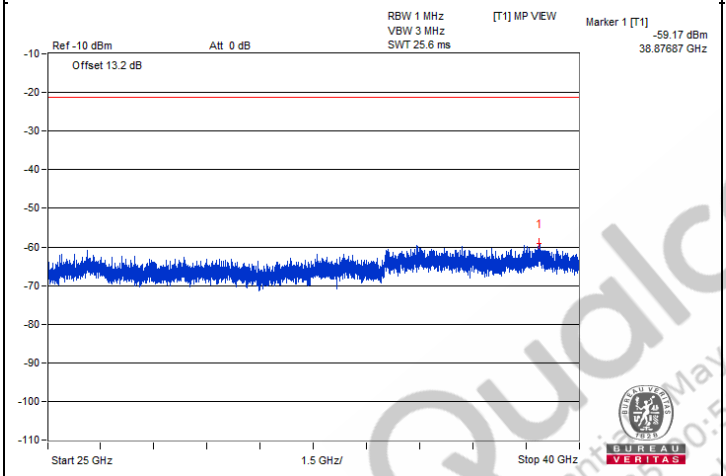

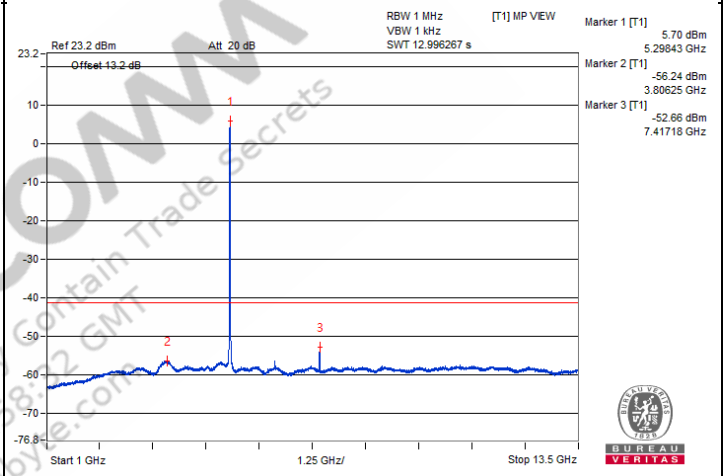


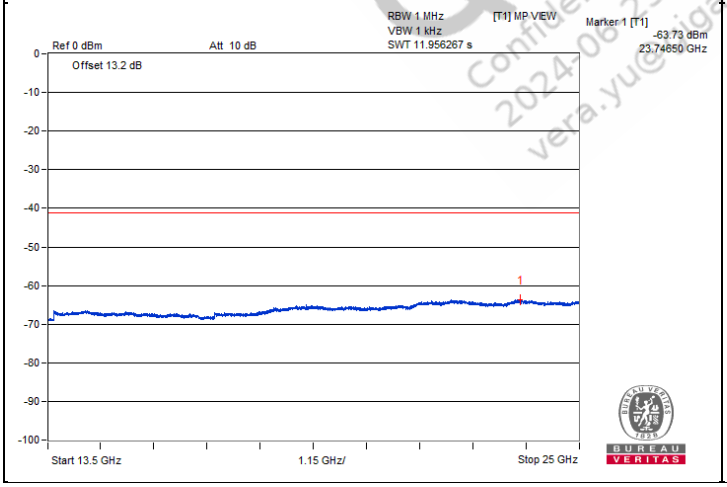


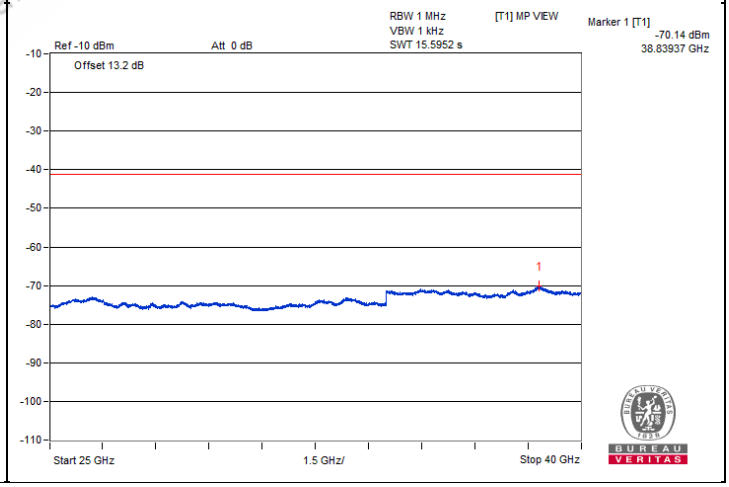



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gabyte.com


Chain 1

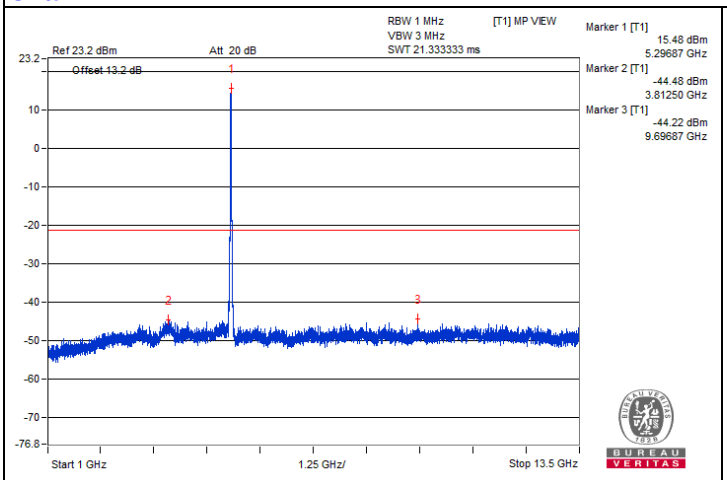


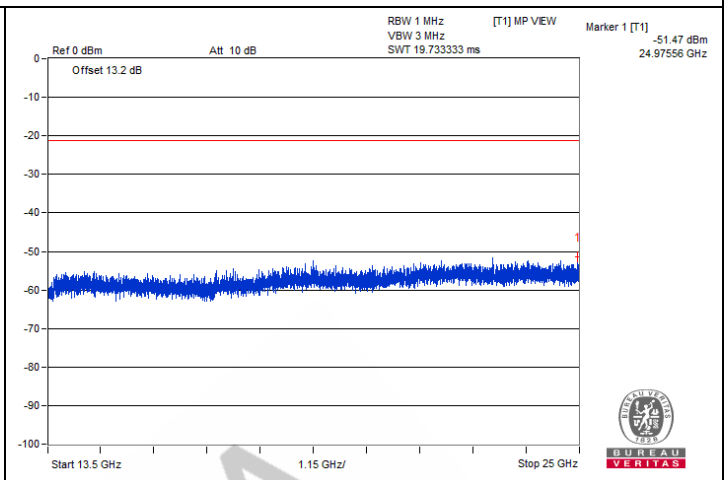

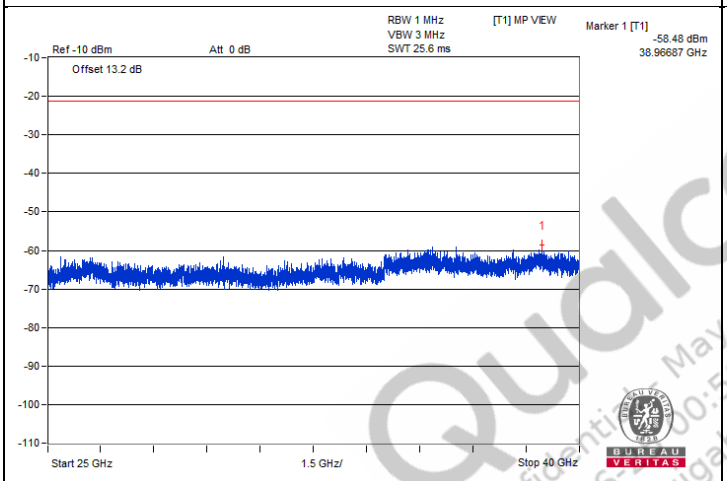

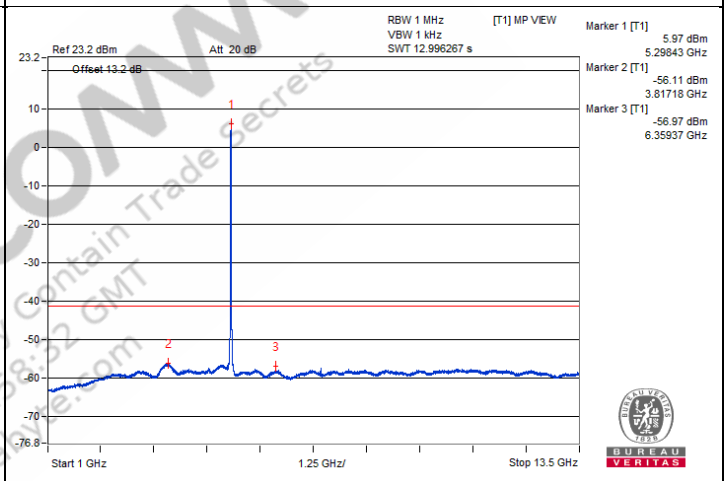

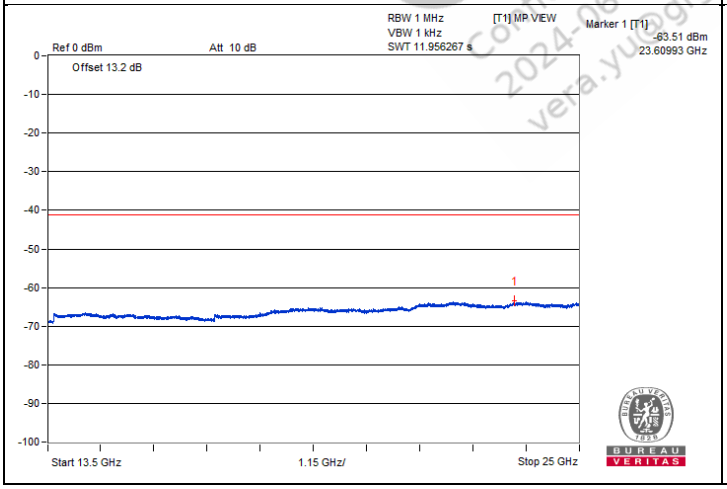

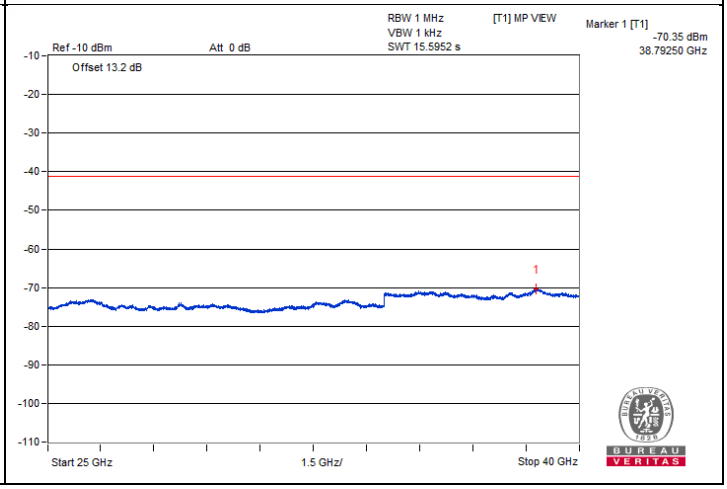

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qgatwe.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5352.72	64.58 PK	74	-9.42	-44.72	-37.94	6.43	-30.68
2	5350.57	47.12 AV	54	-6.88	-57.78	-57.39	6.43	-48.14

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

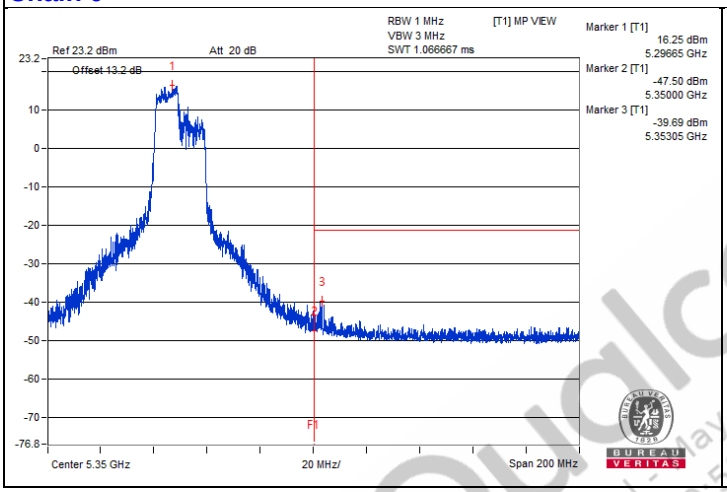

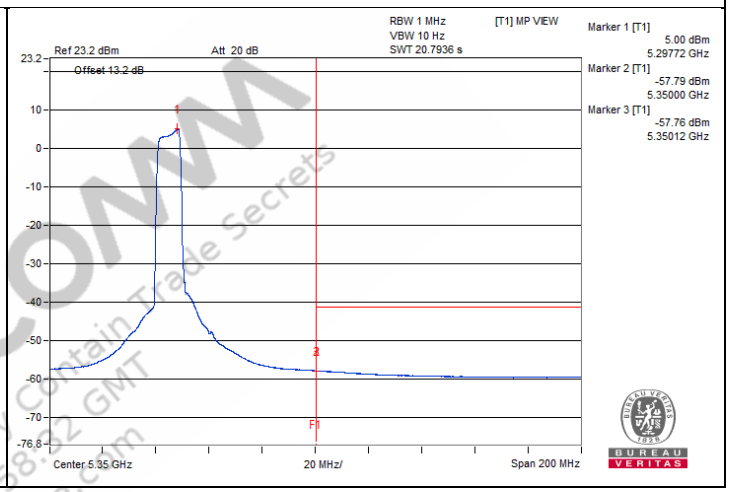

Chain 1

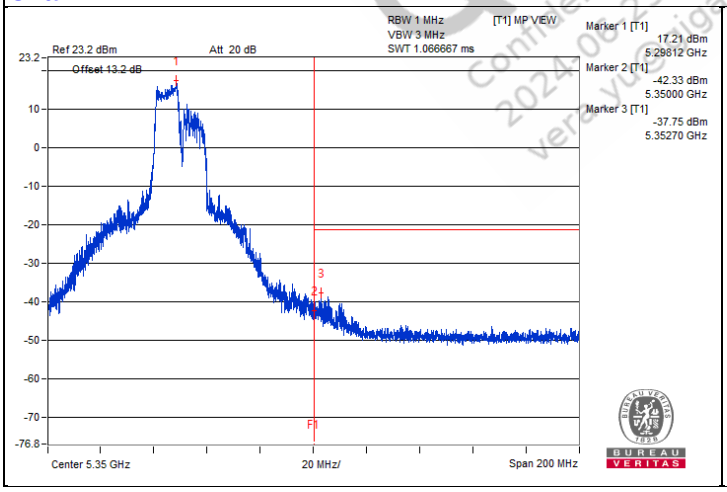

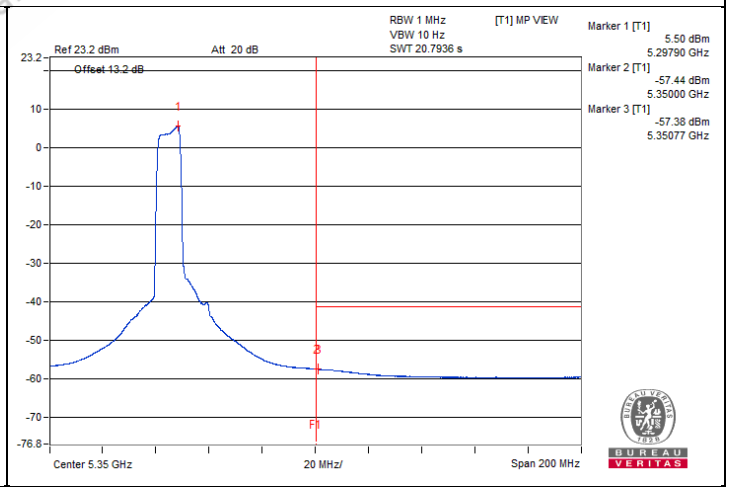

QualcOMM Confidential - May Contain Trade Secrets 2024-06-25 00:58:52 GMT Version: gigabyte.com

802.11be (EHT20) 106-tone RU - Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3556.25	58.16 PK	74	-15.84	-48.51	-48.07	8.17	-37.10
2	3565.62	47.23 AV	54	-6.77	-59.35	-59.08	8.17	-48.03
3	#7104.68	58.84 PK	68.2	-9.36	-47.36	-47.86	8.17	-36.42
4	10625	59.11 PK	74	-14.89	-46.92	-47.79	8.17	-36.15
5	10659.37	48.63 AV	54	-5.37	-57.83	-57.8	8.17	-46.63
6	15965.31	48.76 PK	74	-25.24	-59.3	-56.51	8.17	-46.50
7	15956.68	38.92 AV	54	-15.08	-67.47	-67.58	8.17	-56.34


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

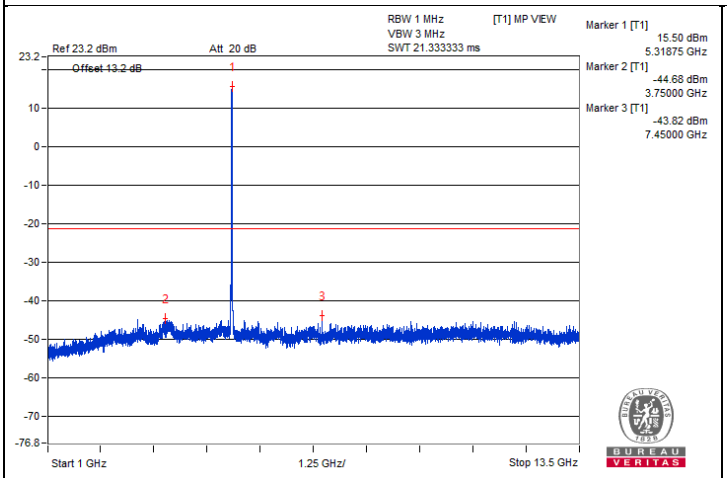


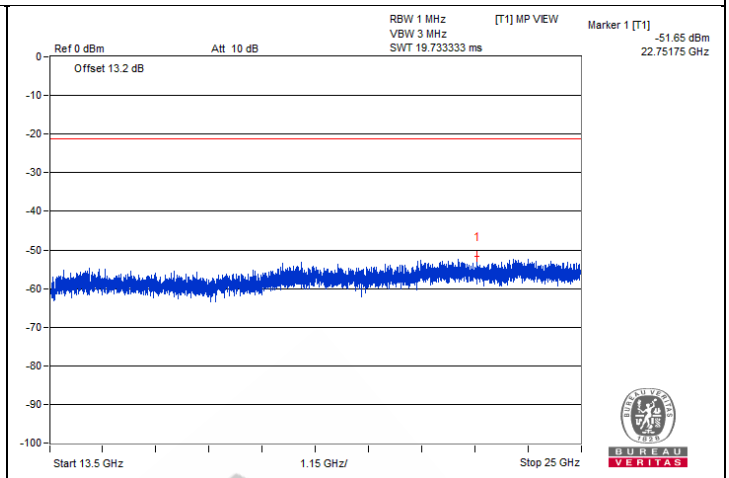

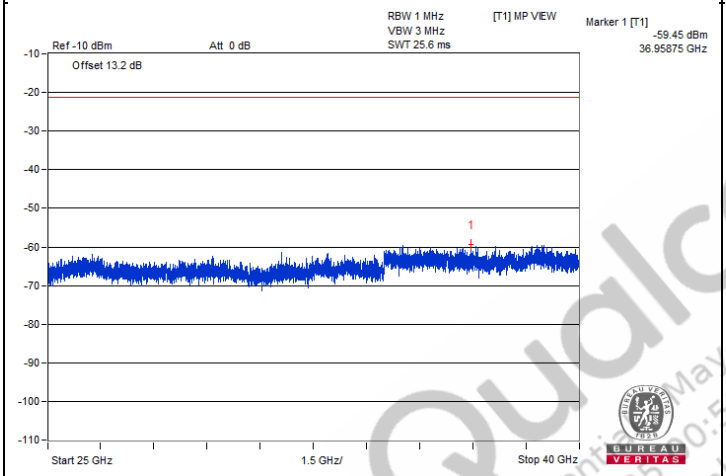

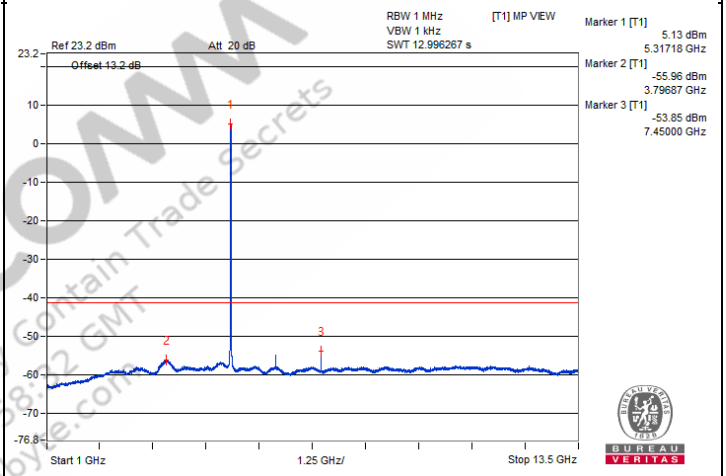


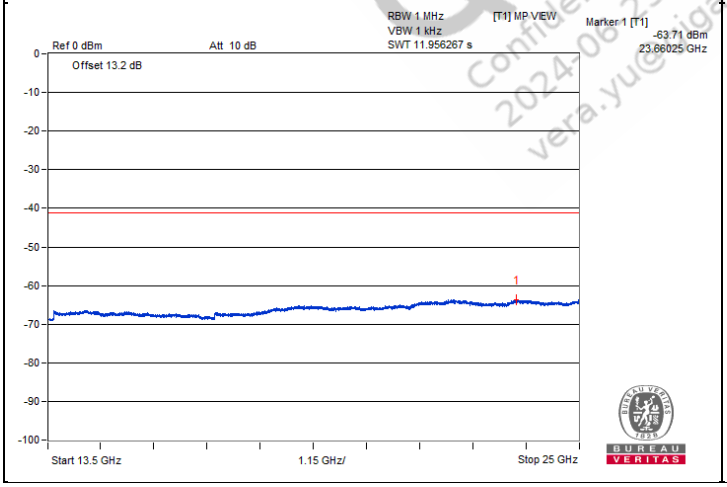


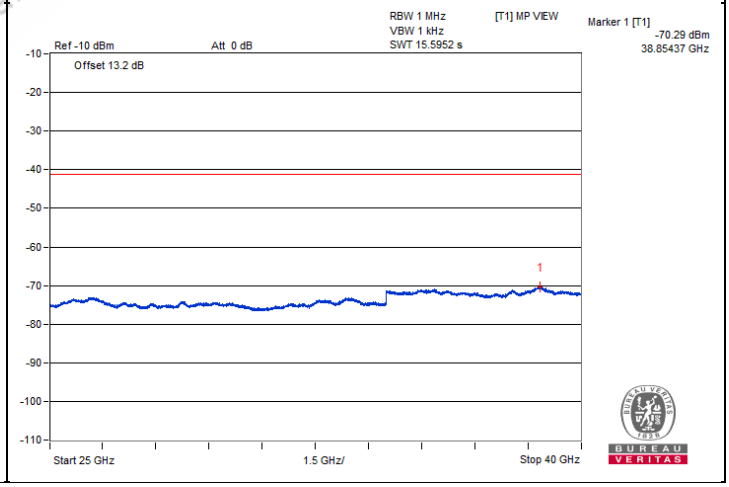



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

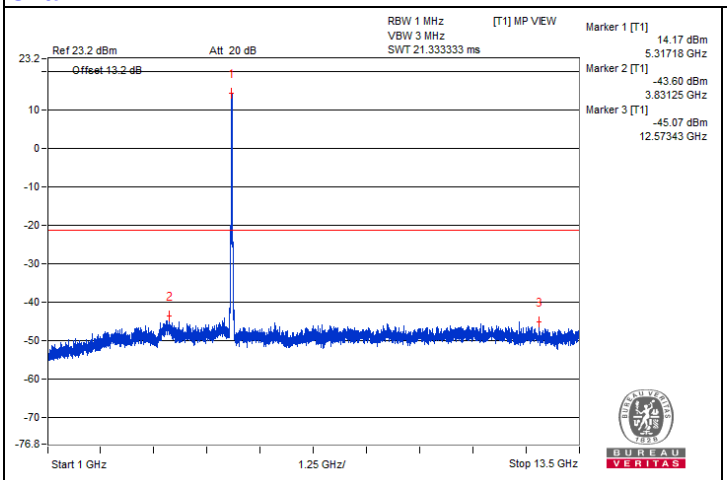


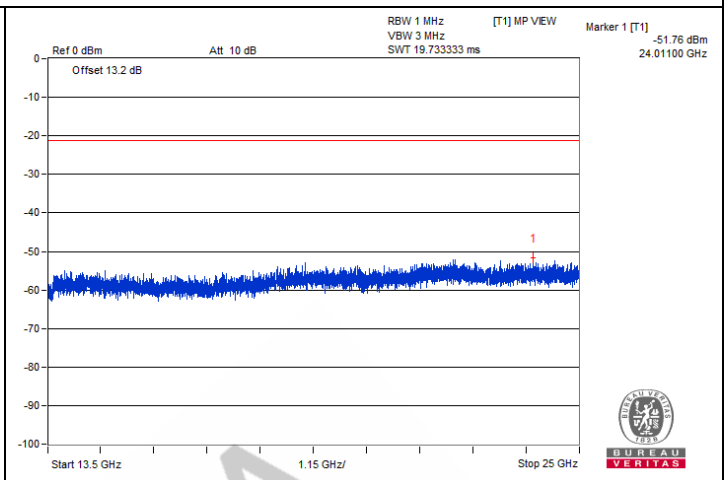

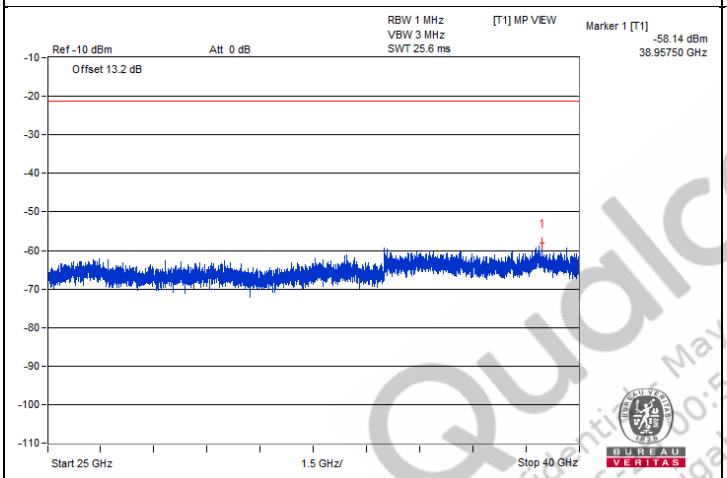

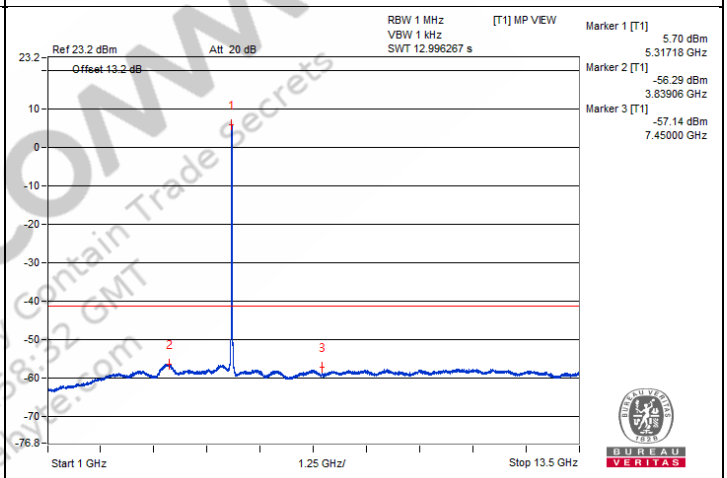

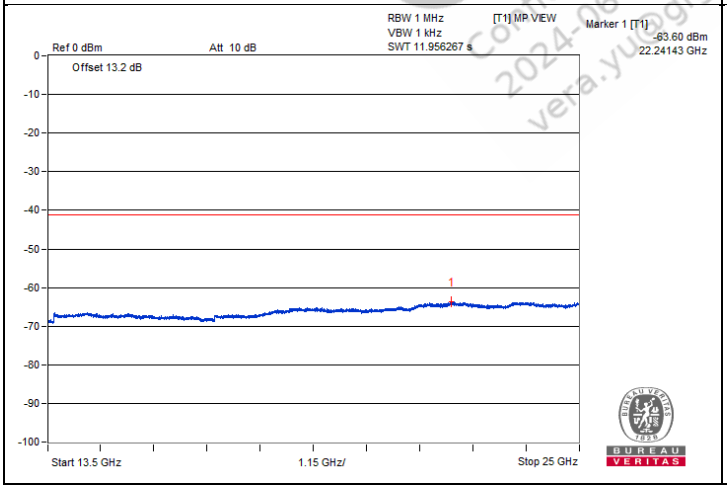

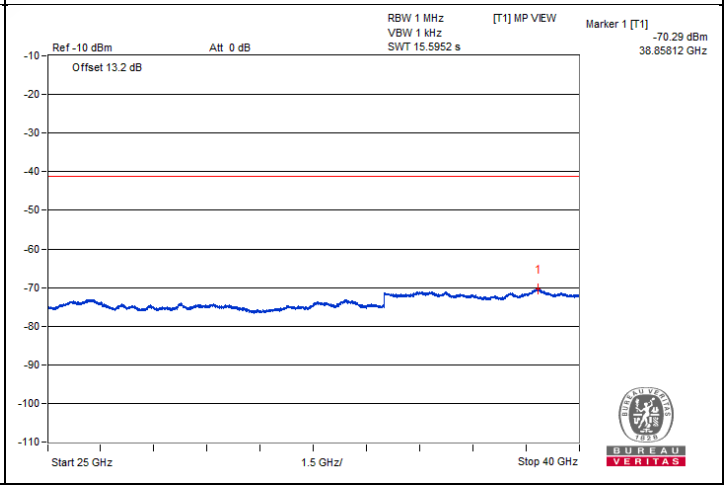

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5352.47	71.62 PK	74	-2.38	-43.09	-30.29	6.43	-23.64
2	5350.02	48.27 AV	54	-5.73	-56.78	-56.1	6.43	-46.99

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

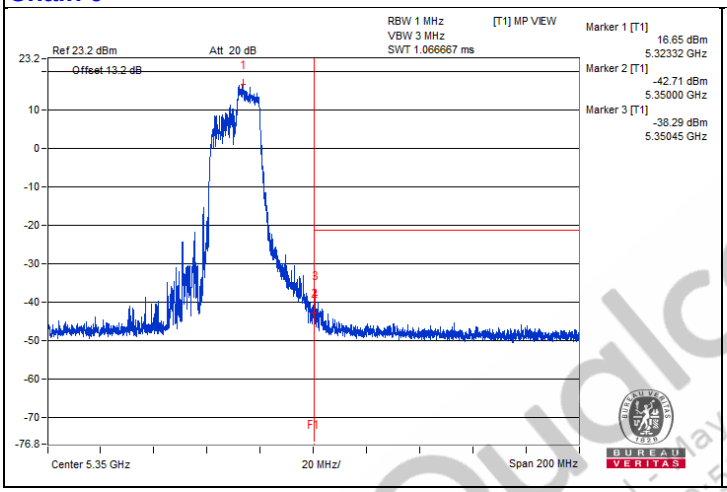

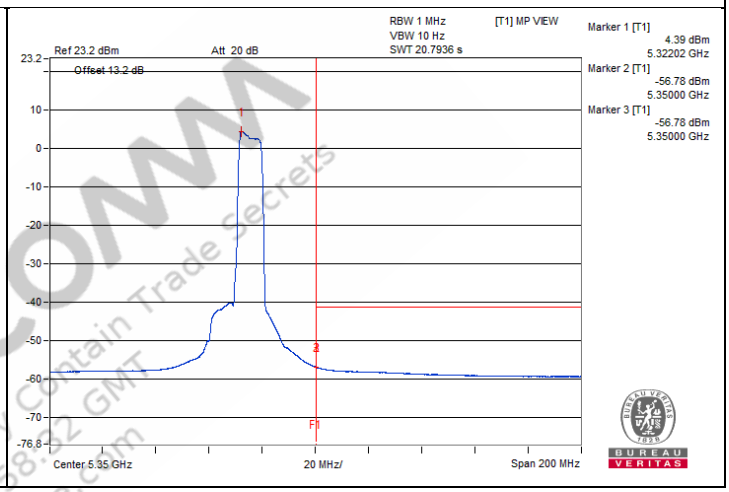

Chain 1

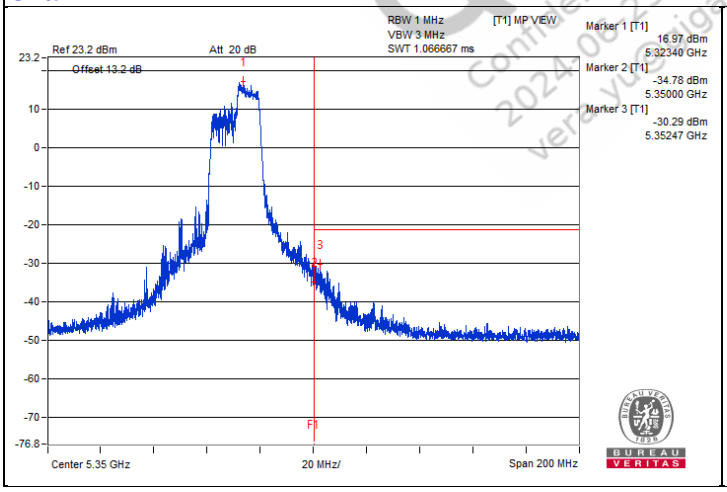

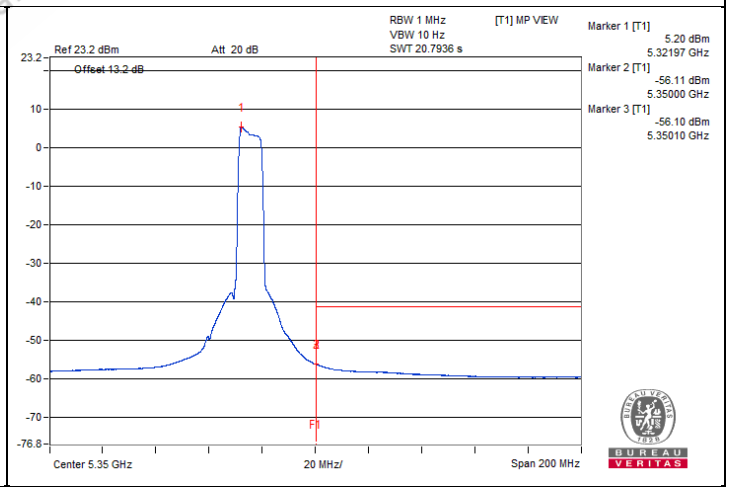

QualComm Confidential - May Contain Trade Secrets 2024-06-25 00:58:52 GMT Version: gigabyte.com

802.11be (EHT20) 106-tone RU - Channel 100

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3685.93	59.77 PK	74	-14.23	-46.24	-47.14	8.17	-35.49
2	3685.93	49.12 AV	54	-4.88	-57.19	-57.45	8.17	-46.14
3	7339.06	59.29 PK	74	-14.71	-48.03	-46.42	8.17	-35.97
4	7340.62	48.08 AV	54	-5.92	-58.52	-58.2	8.17	-47.18
5	10998.43	59.62 PK	74	-14.38	-46.48	-47.19	8.17	-35.64
6	11014.06	48.66 AV	54	-5.34	-57.91	-57.65	8.17	-46.60
7	#16487.12	48.84 PK	68.2	-19.36	-58.79	-56.66	8.17	-46.42


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

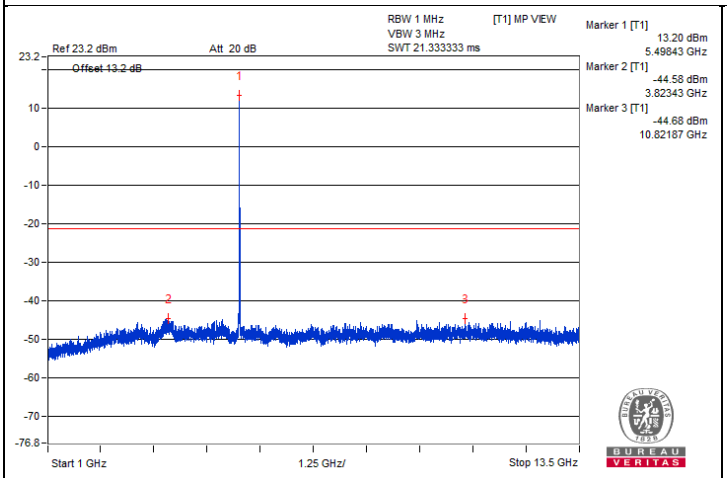


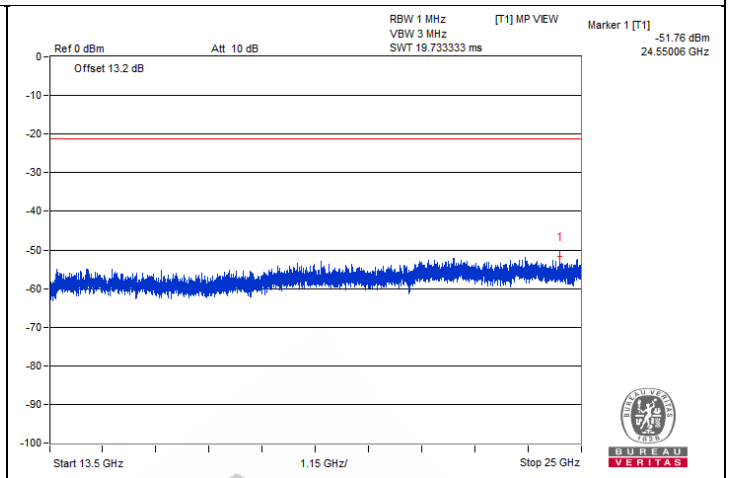

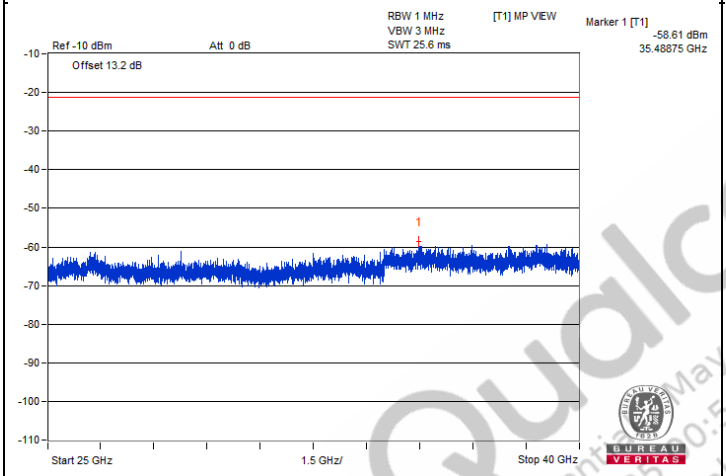

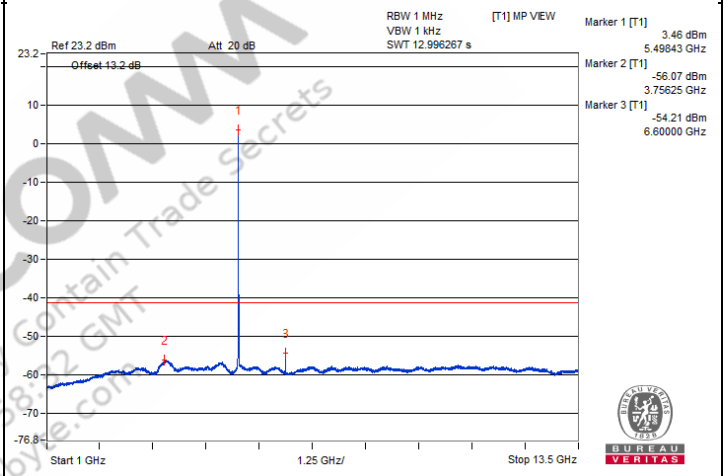


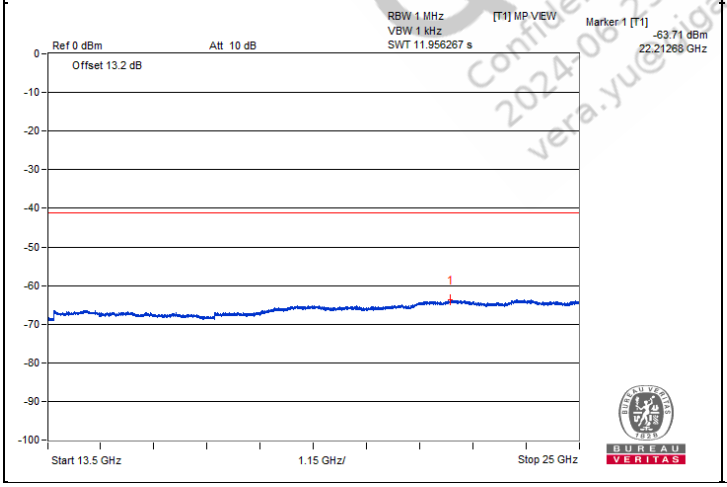


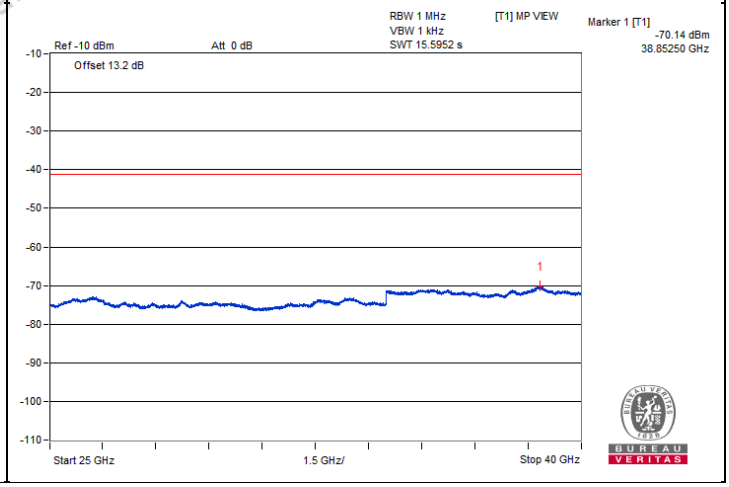



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

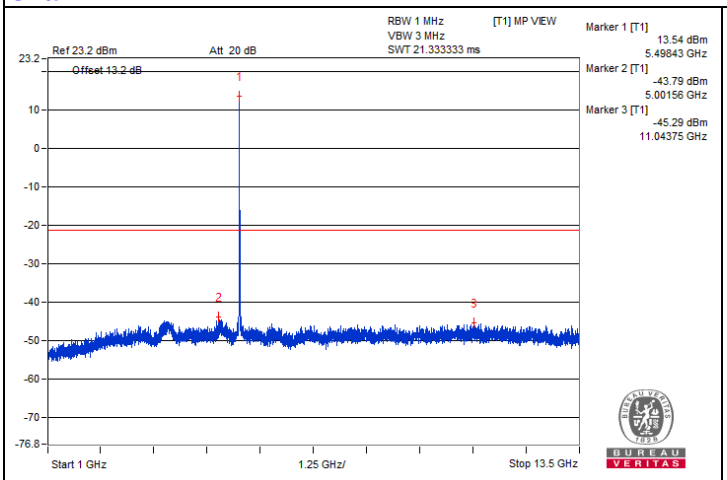


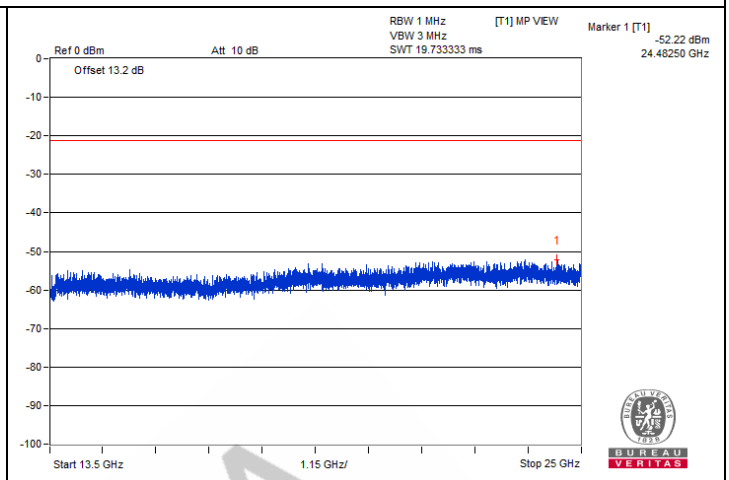

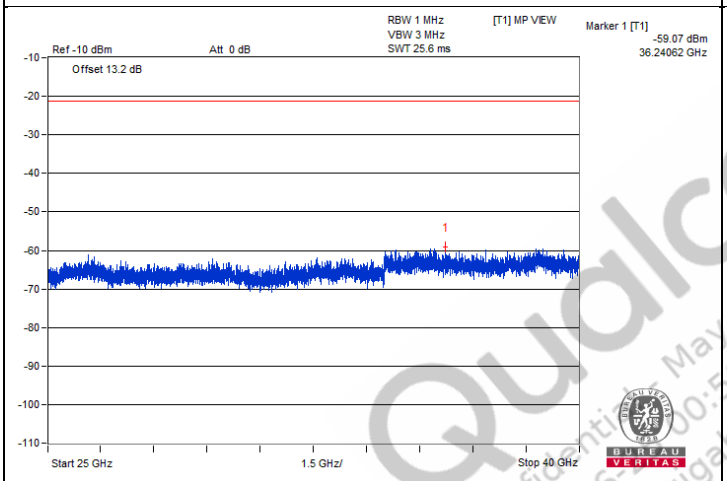

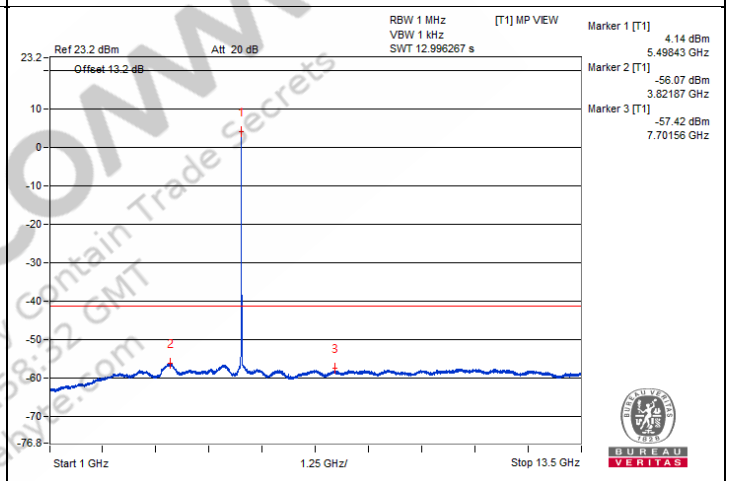

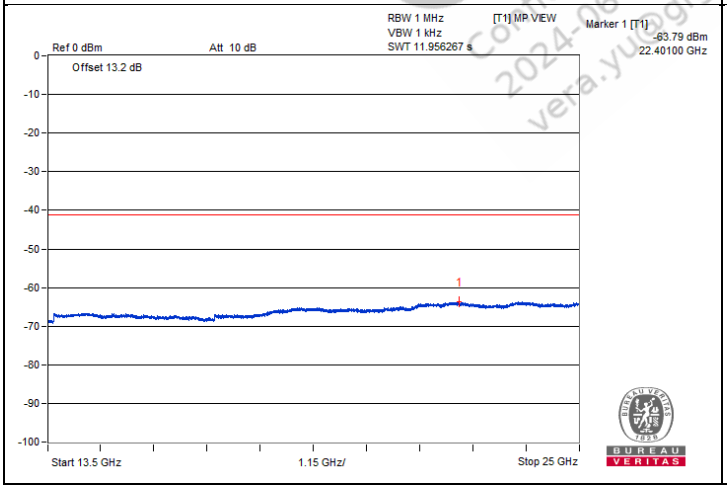

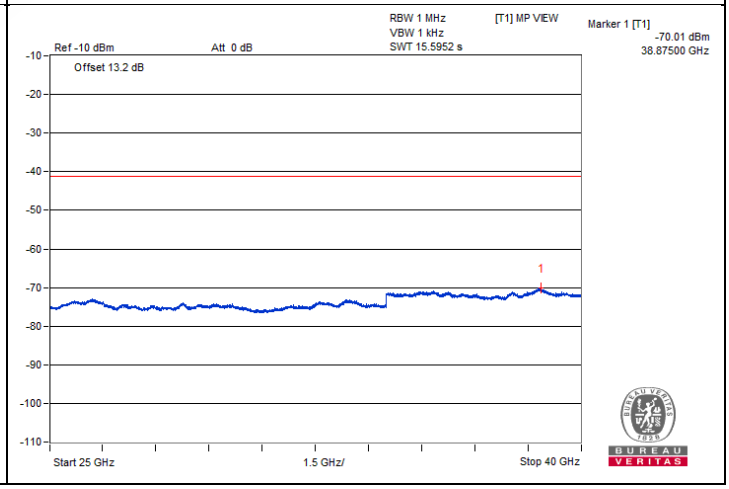

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5459.21	60.24 PK	74	-13.76	-48.47	-44.23	7.82	-35.02
2	5459.81	48.15 AV	54	-5.85	-58.5	-57.45	7.82	-47.11
3	#5465.12	60.84 PK	68.2	-7.36	-43.95	-47.11	7.82	-34.42

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

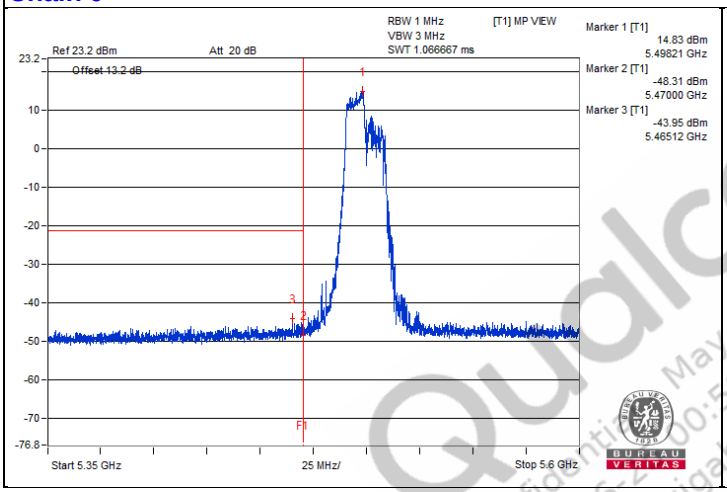

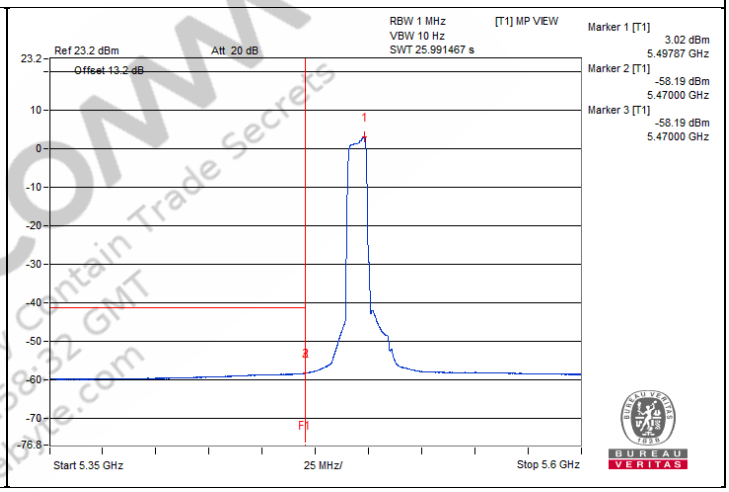

Chain 1

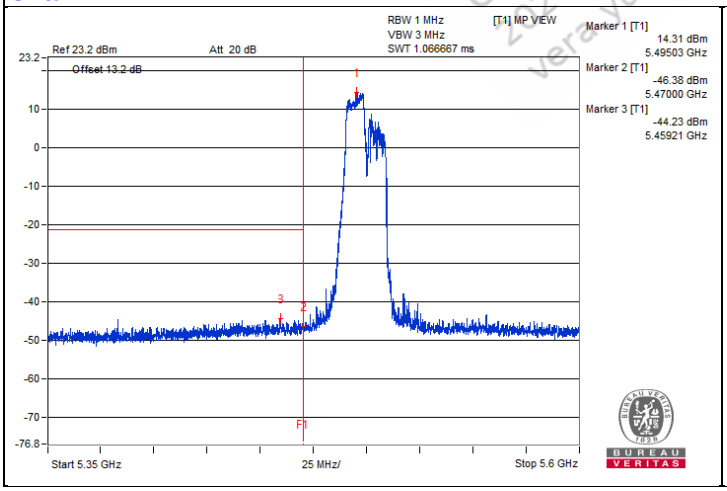

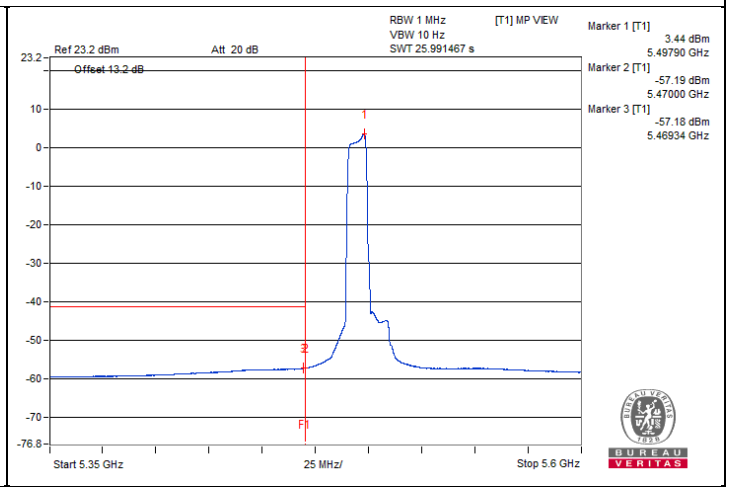

QualcOMM Confidential and May Contain Trade Secrets 2024-06-21 00:58:32 GMT veravu@gigabyte.com

802.11be (EHT20) 106-tone RU - Channel 116

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3710.93	60.7 PK	74	-13.3	-44.09	-48.42	8.17	-34.56
2	3732.81	49.9 AV	54	-4.1	-56.63	-56.46	8.17	-45.36
3	7426.56	57.96 PK	74	-16.04	-47.42	-49.89	8.17	-37.30
4	7423.43	47.41 AV	54	-6.59	-59.11	-58.96	8.17	-47.85
5	11175	59.32 PK	74	-14.68	-47.01	-47.24	8.17	-35.94
6	11170.31	48.4 AV	54	-5.6	-58.16	-57.92	8.17	-46.86
7	#16722.87	48.25 PK	68.2	-19.95	-56.93	-59.98	8.17	-47.01


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

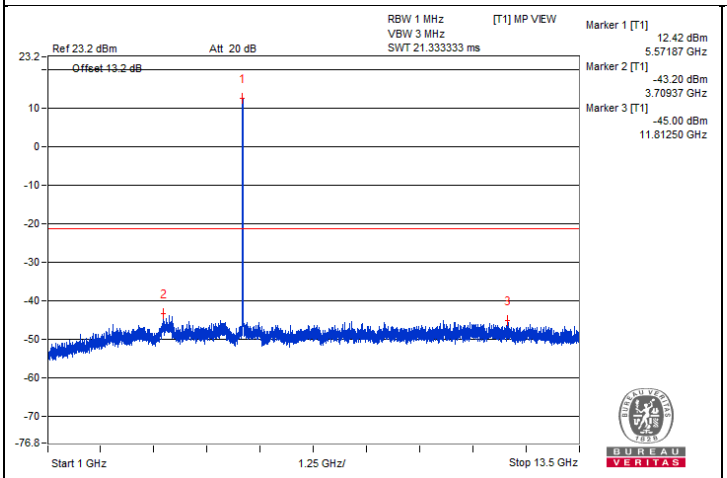


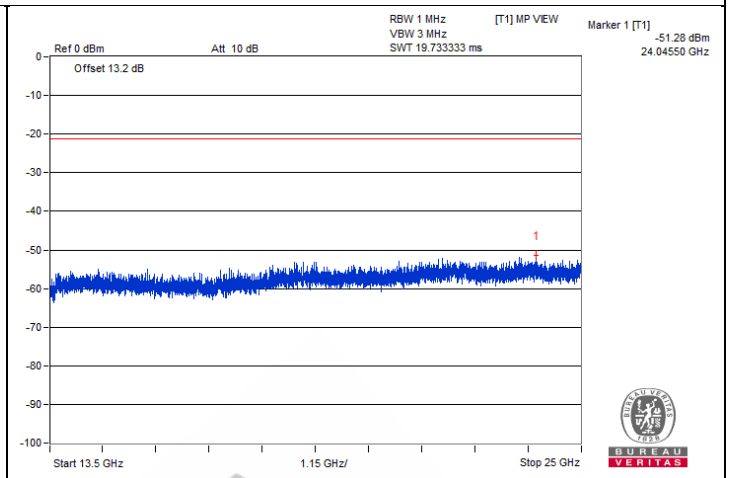

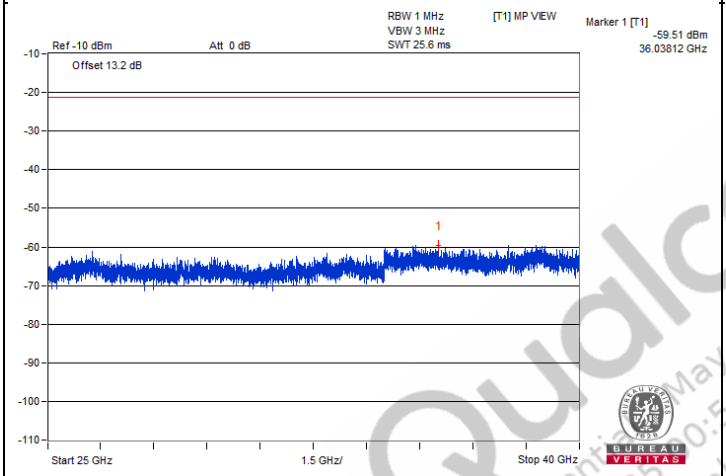

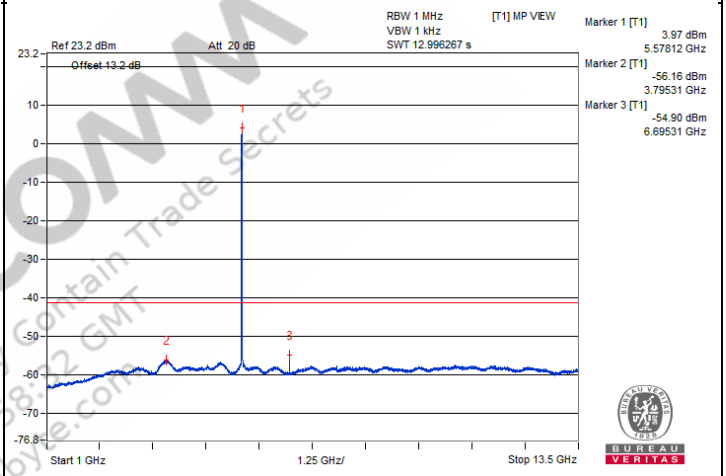


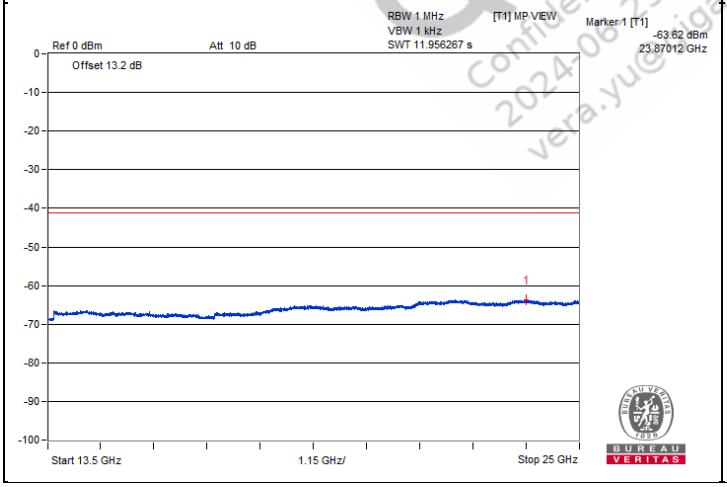


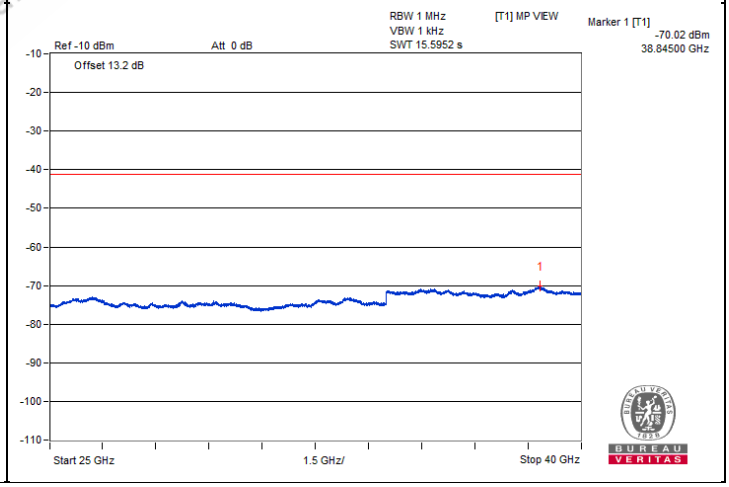



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yu@gigabyte.com


Chain 1

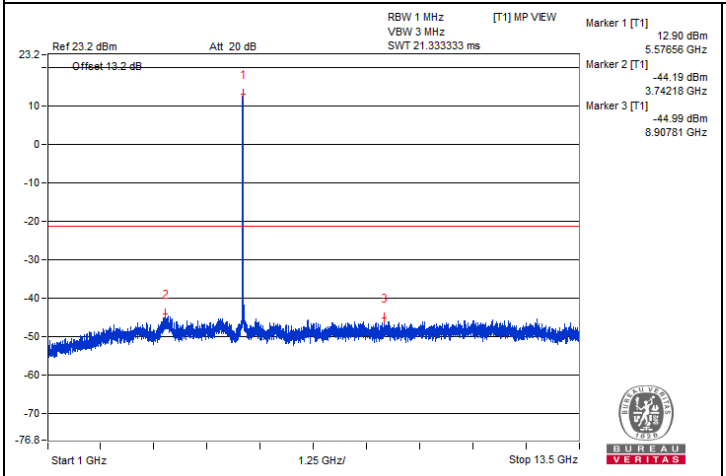


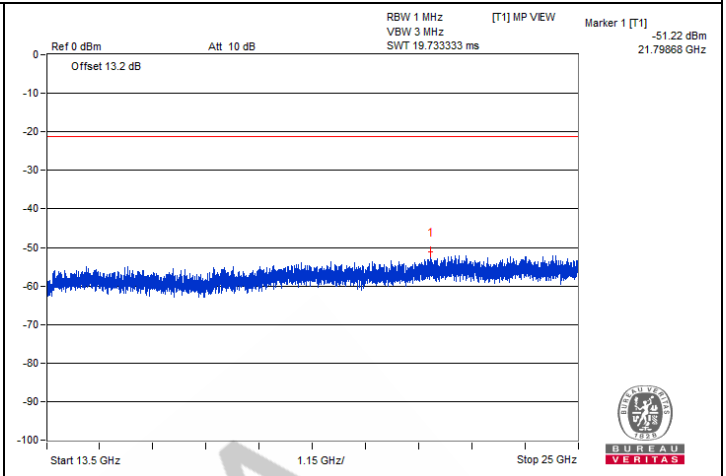

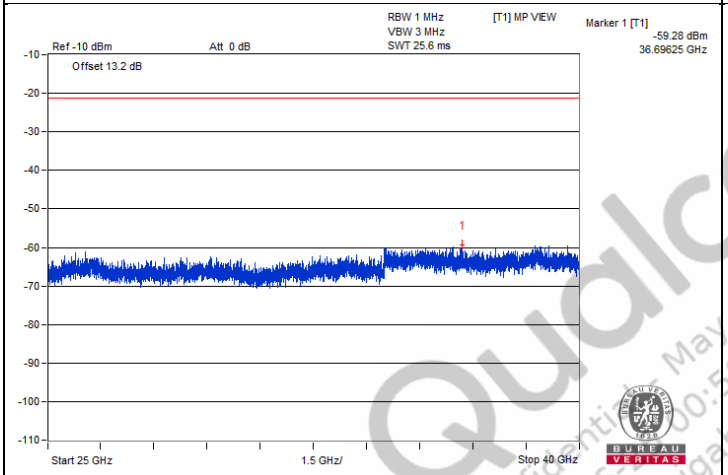

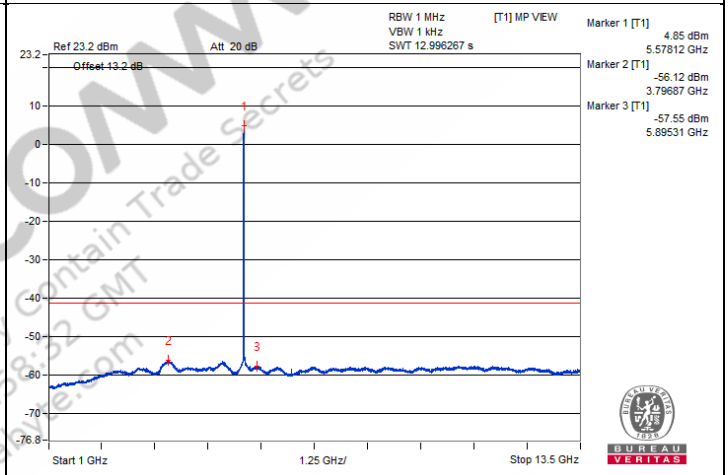

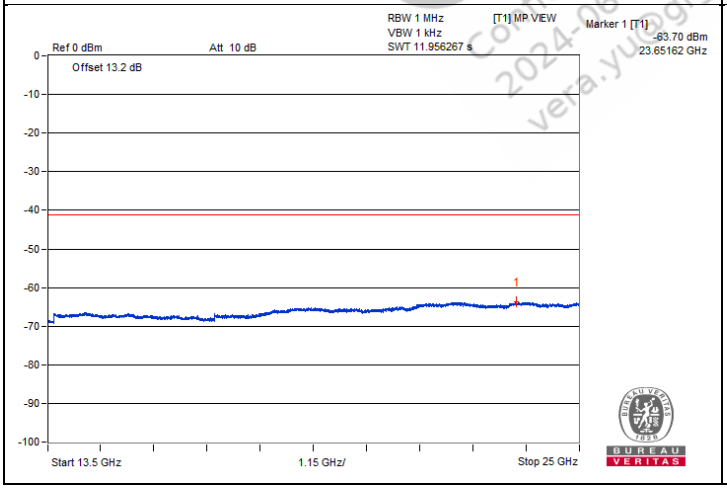

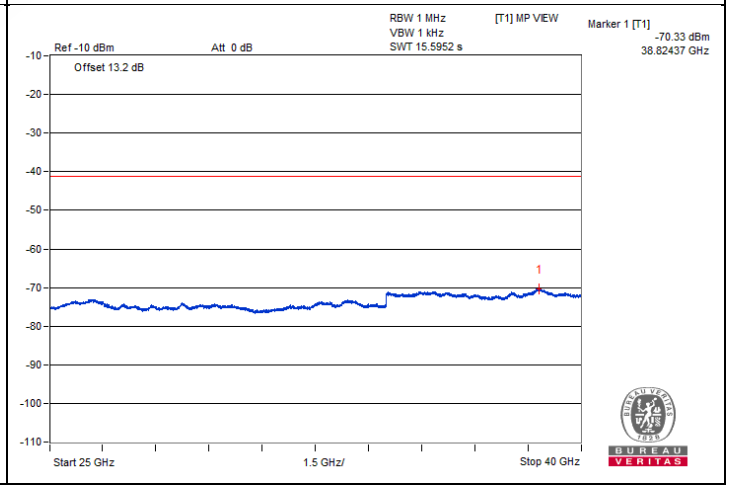

QualcOMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qgaive.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5455.06	59.4 PK	74	-14.6	-45.29	-48.76	7.82	-35.86
2	5457.71	46.91 AV	54	-7.09	-59.26	-59.11	7.82	-48.35
3	#5463.18	59.57 PK	68.2	-8.63	-45.21	-48.4	7.82	-35.69

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

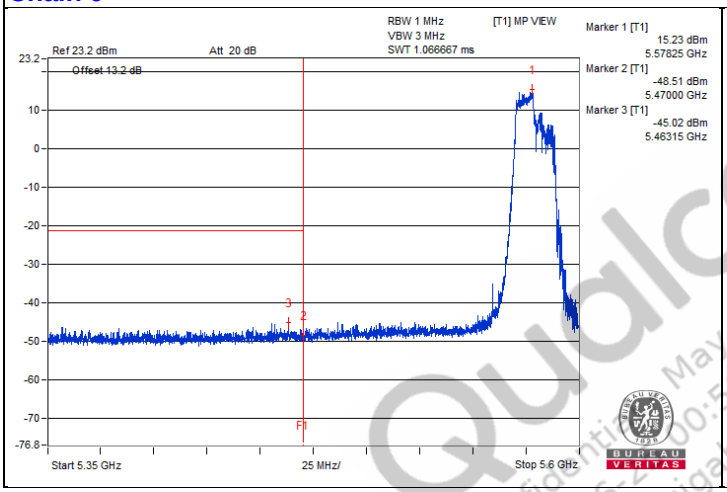

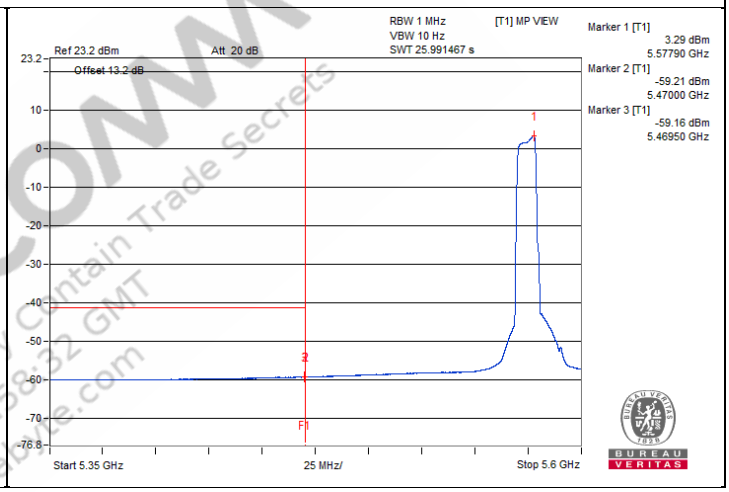

Chain 1

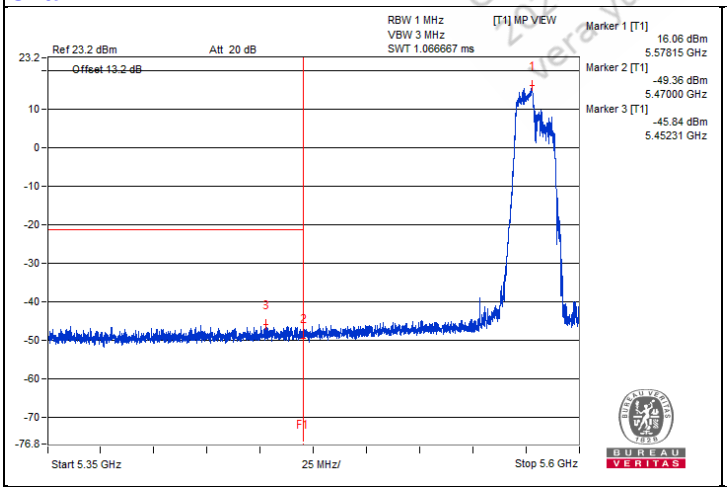

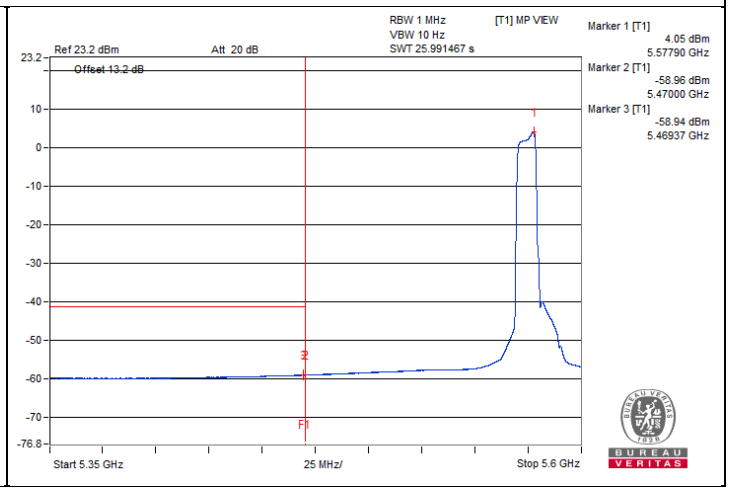

QualComm Confidential Information May Contain Trade Secrets 2024-06-21 00:58:32 GMT vera.vu@gigaset.com

802.11be (EHT20) 106-tone RU - Channel 140

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3812.5	60.81 PK	74	-13.19	-45.37	-45.91	8.17	-34.45
2	3798.43	50.29 AV	54	-3.71	-56.13	-56.18	8.17	-44.97
3	7601.56	58.38 PK	74	-15.62	-47.27	-49.02	8.17	-36.88
4	7596.87	47.96 AV	54	-6.04	-58.55	-58.42	8.17	-47.30
5	11401.56	59.59 PK	74	-14.41	-45.97	-47.96	8.17	-35.67
6	11418.75	48.51 AV	54	-5.49	-57.87	-57.99	8.17	-46.75
7	#17105.25	49.48 PK	68.2	-18.72	-55.94	-58.3	8.17	-45.78


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

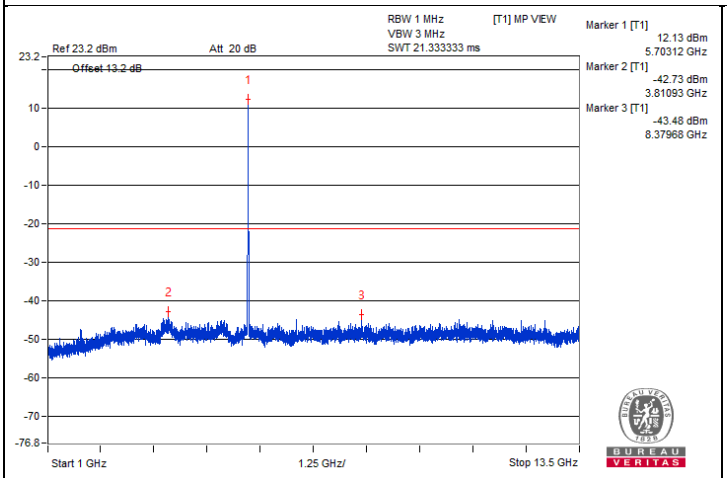


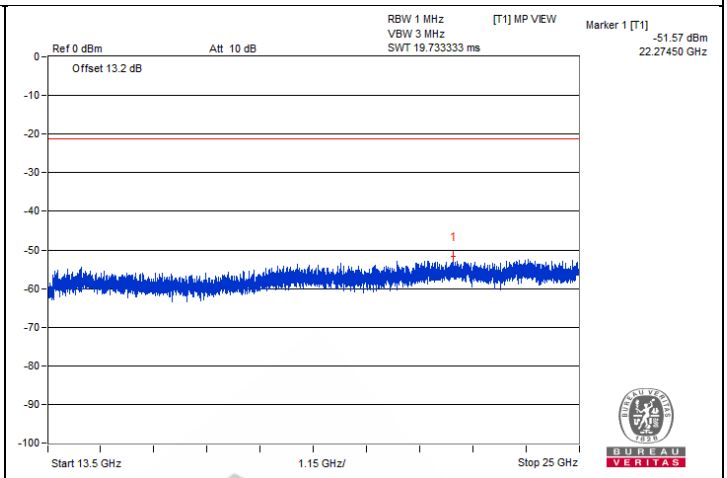

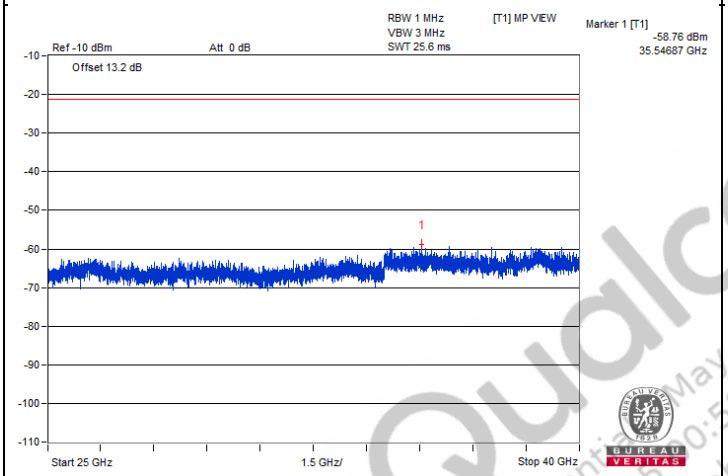

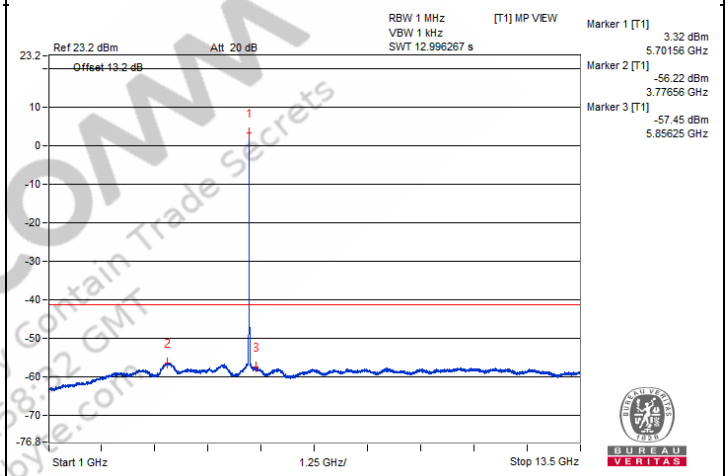


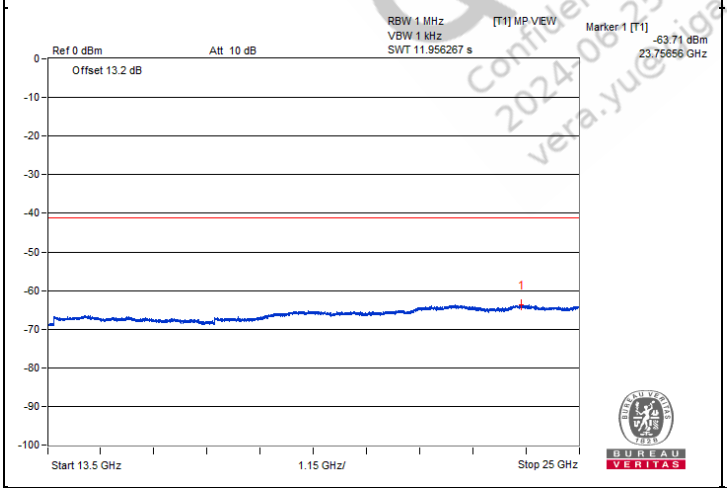


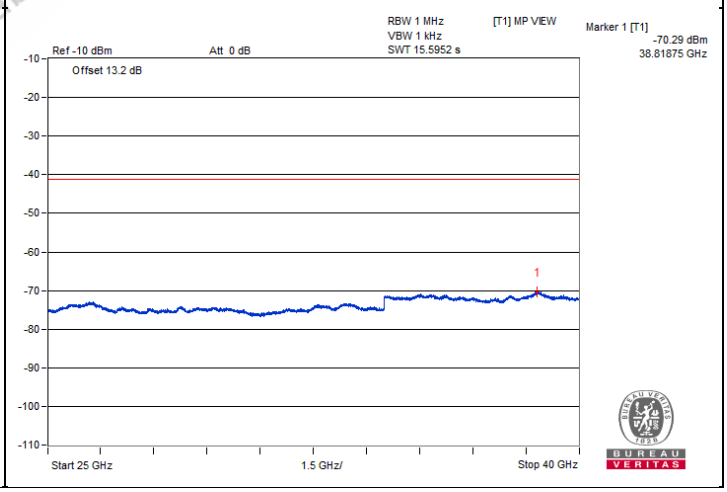



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

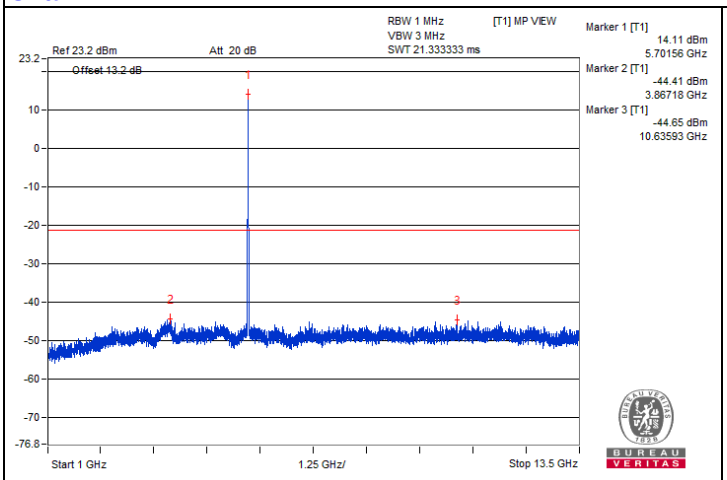


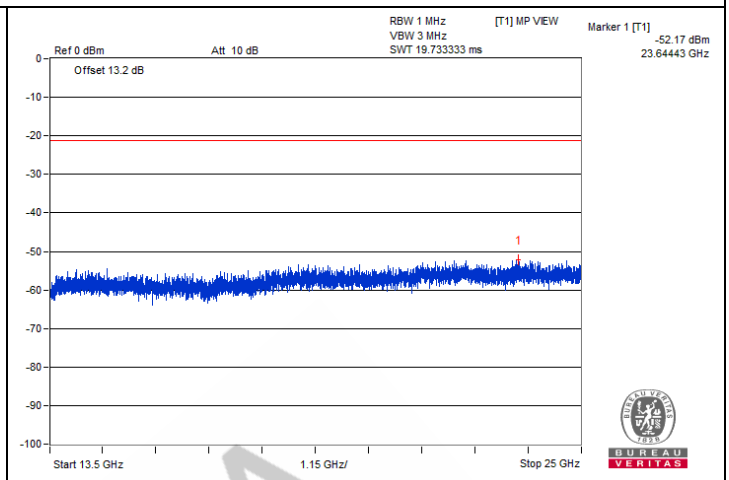

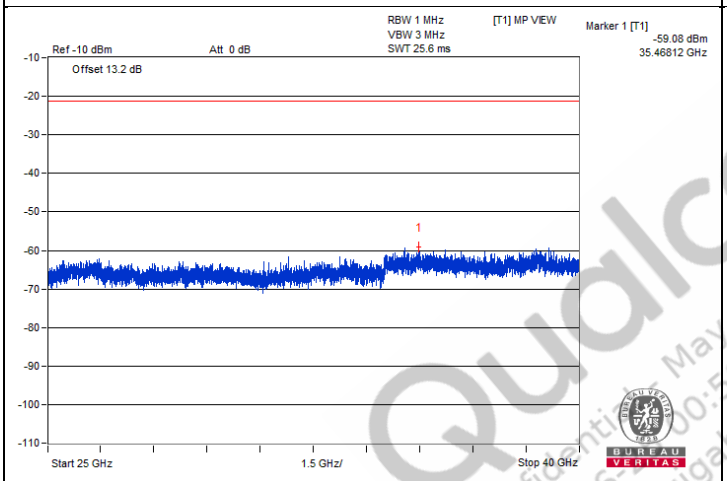

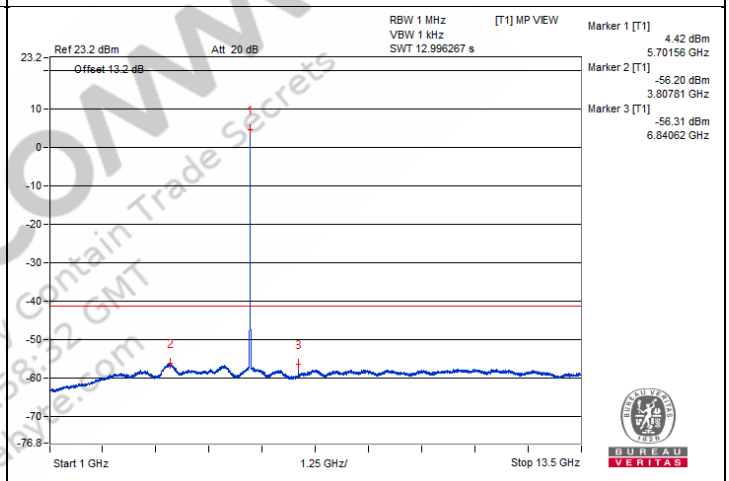

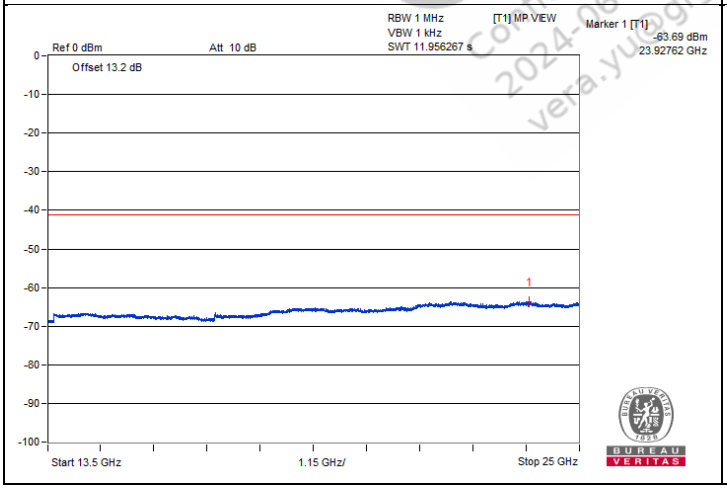

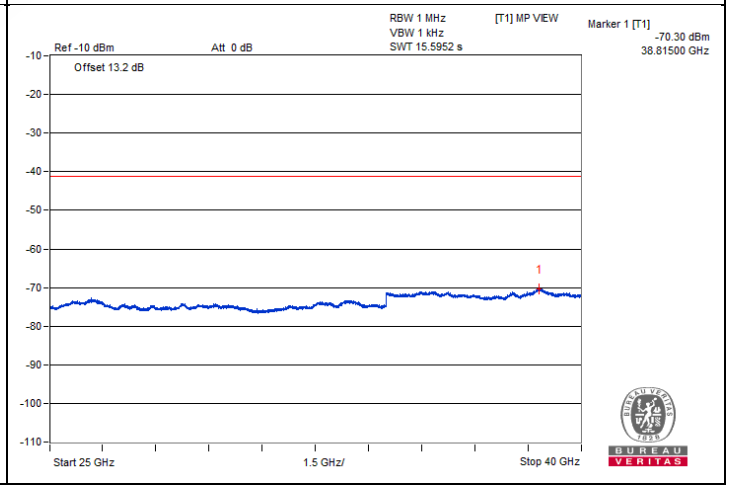

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5725.22	61.2 PK	68.2	-7	-45.8	-44.14	7.82	-34.06


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

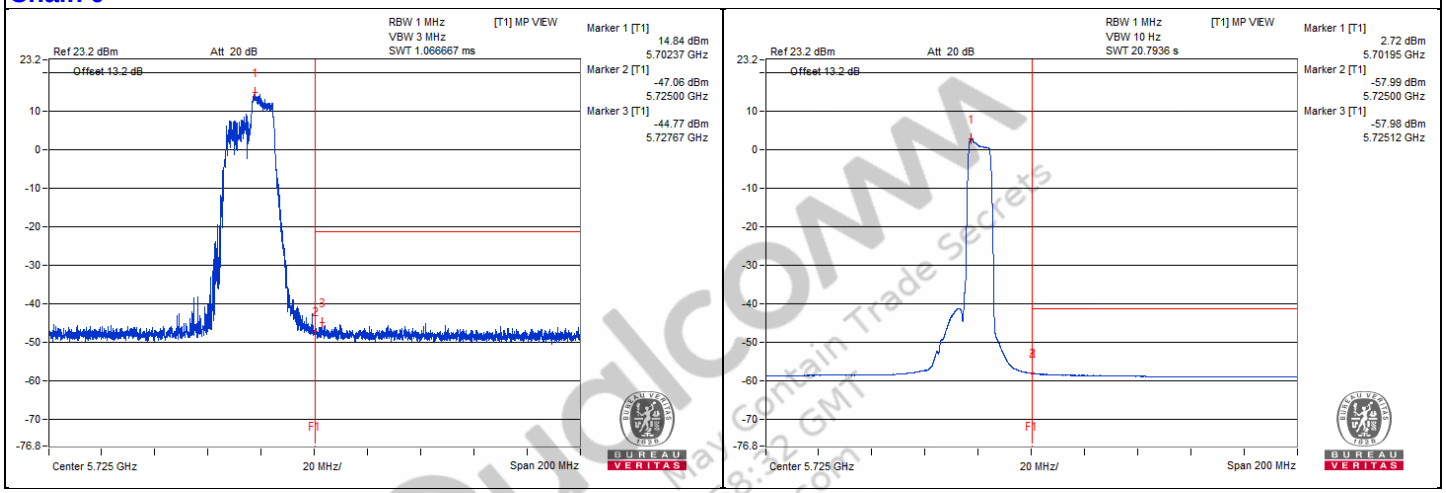

Chain 1

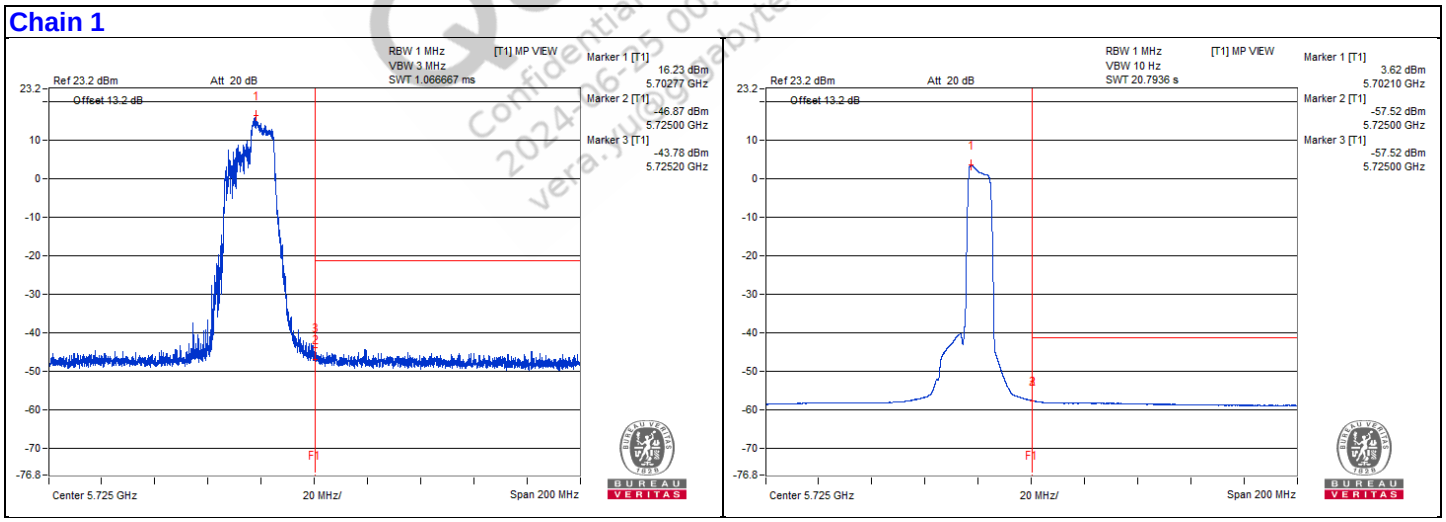

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gsabyte.com

802.11be (EHT20) 106-tone RU - Channel 144

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3823.43	61.58 PK	74	-12.42	-43.76	-46.33	8.17	-33.68
2	3814.06	50.16 AV	54	-3.84	-56.48	-56.08	8.17	-45.10
3	7607.81	58.58 PK	74	-15.42	-48.93	-47	8.17	-36.68
4	7640.62	47.98 AV	54	-6.02	-58.66	-58.27	8.17	-47.28
5	11432.81	59.98 PK	74	-14.02	-47.35	-45.72	8.17	-35.28
6	11457.81	48.67 AV	54	-5.33	-57.57	-57.99	8.17	-46.59
7	#17146.93	49.85 PK	68.2	-18.35	-55.08	-58.92	8.17	-45.41


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

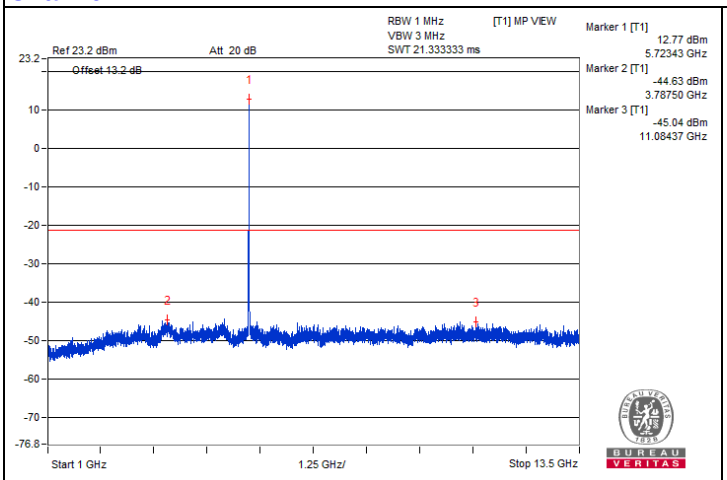


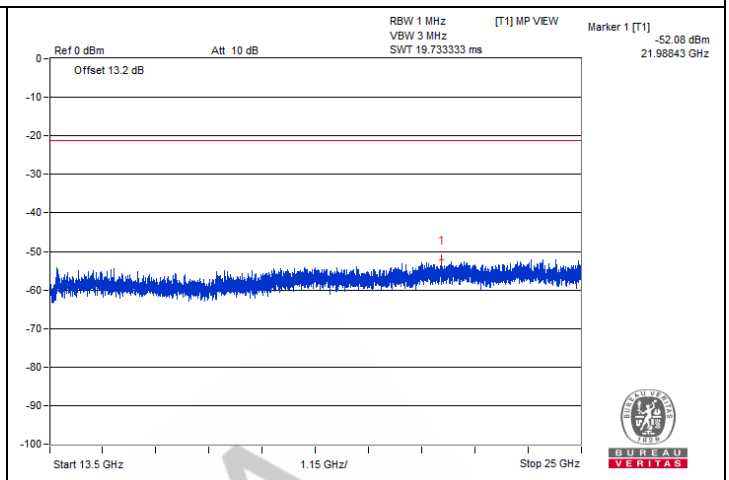

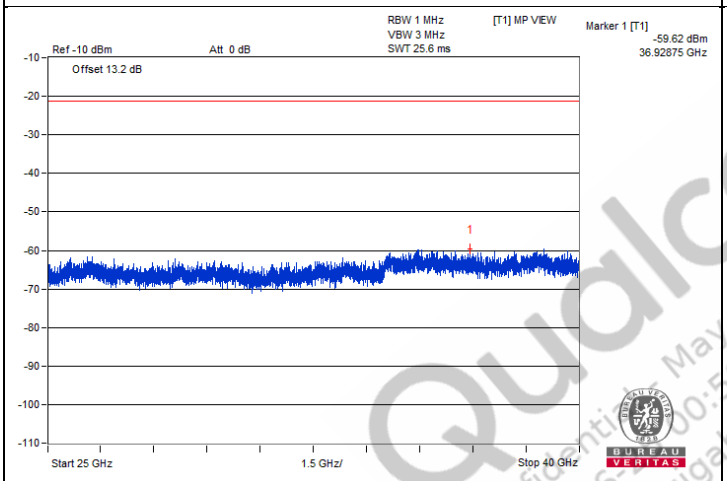

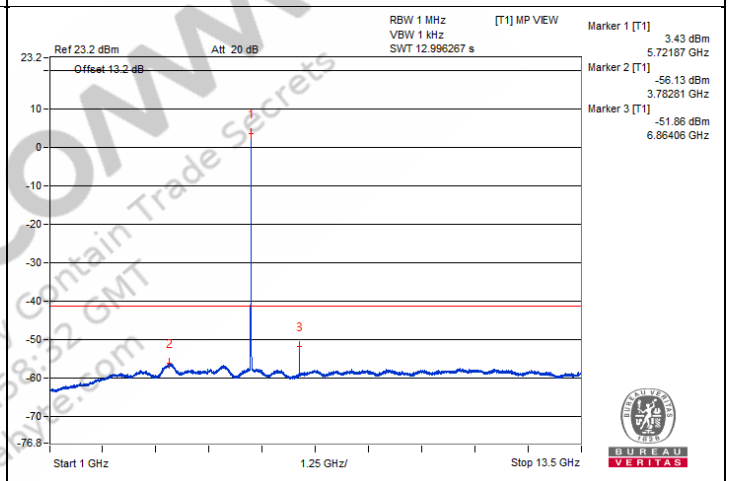


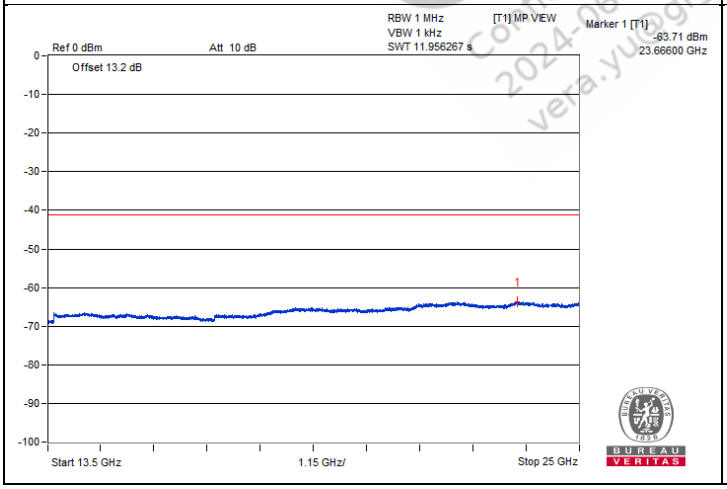


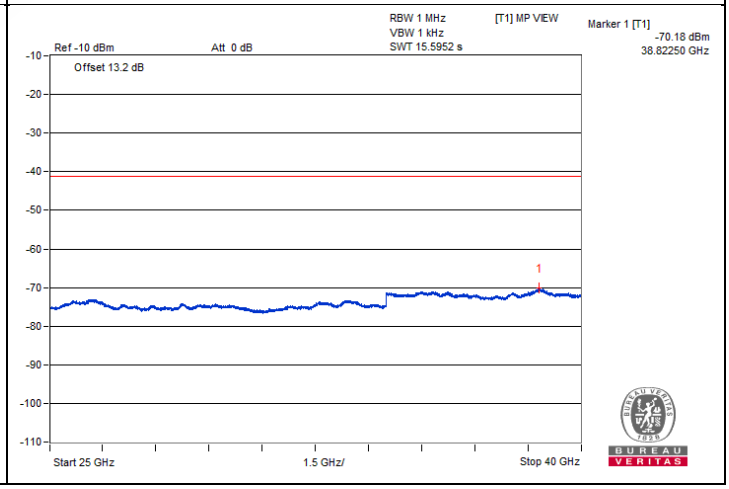



QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Chain 1

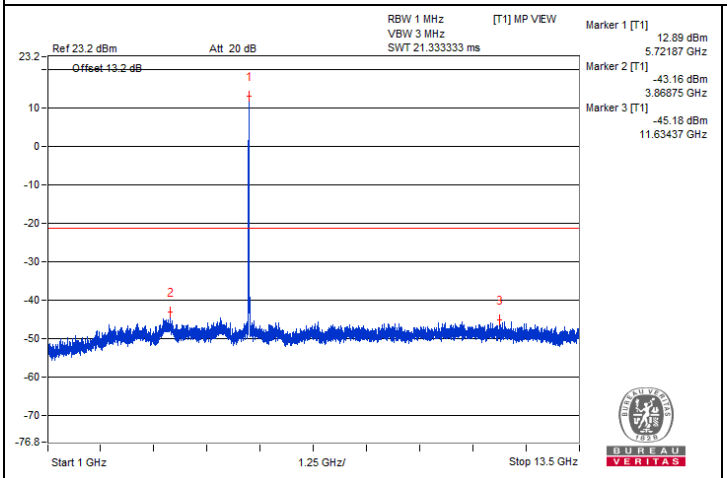


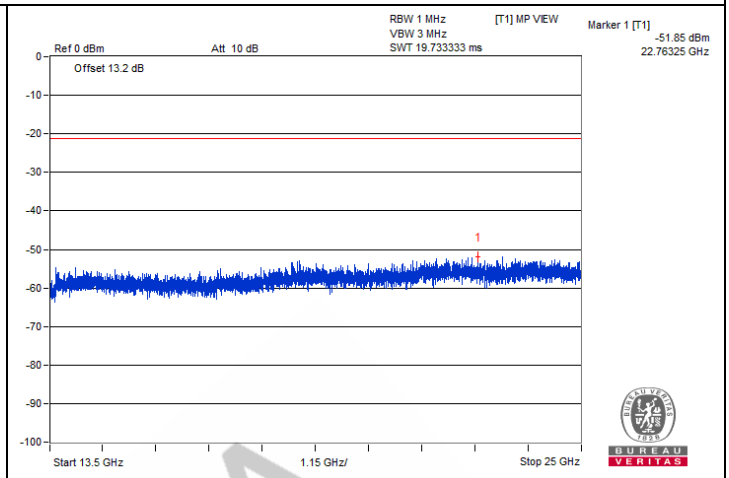

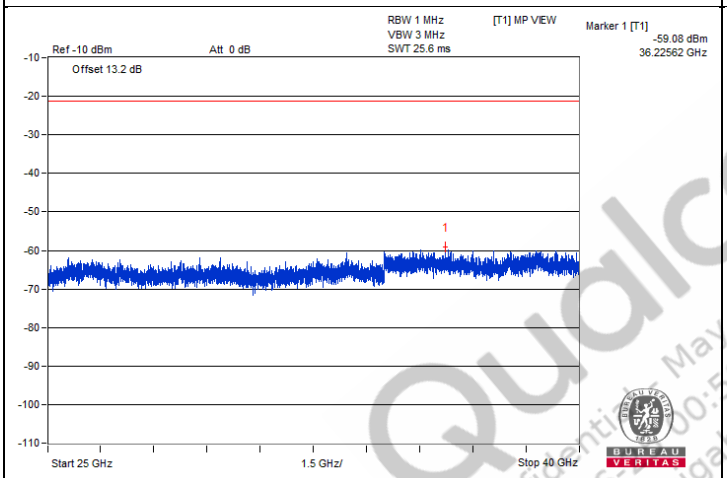

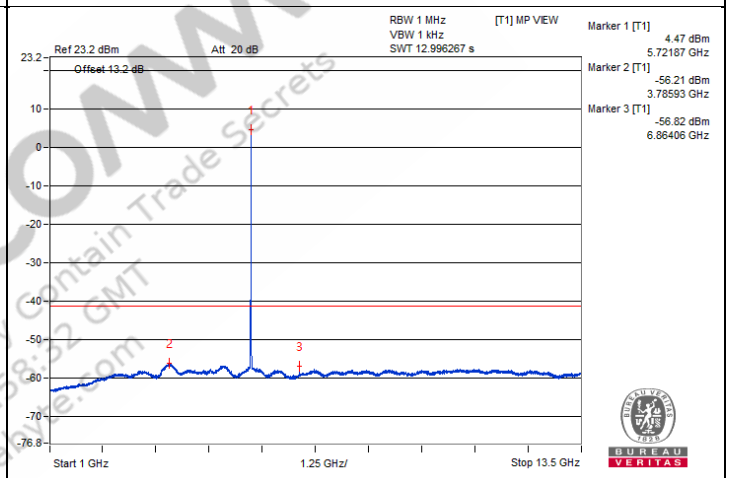

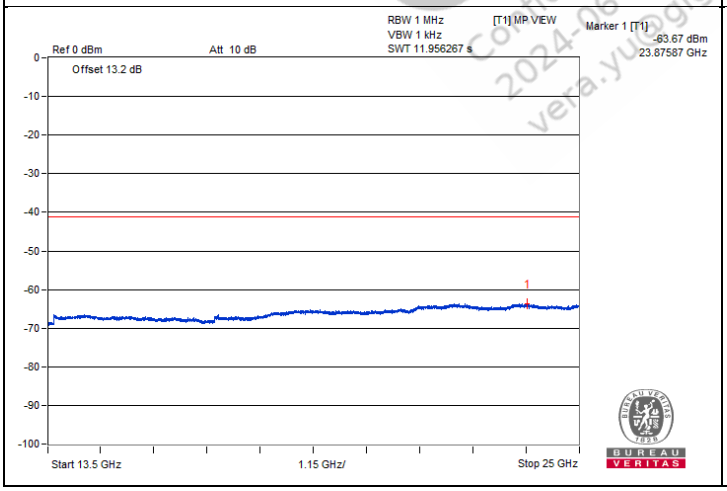

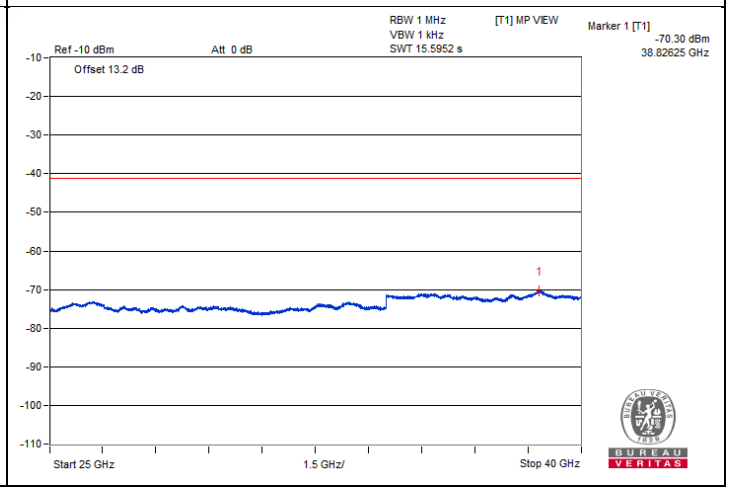

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@bgatvie.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5911.07	60.33 PK	68.2	-7.87	-47.82	-44.37	7.82	-34.93

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

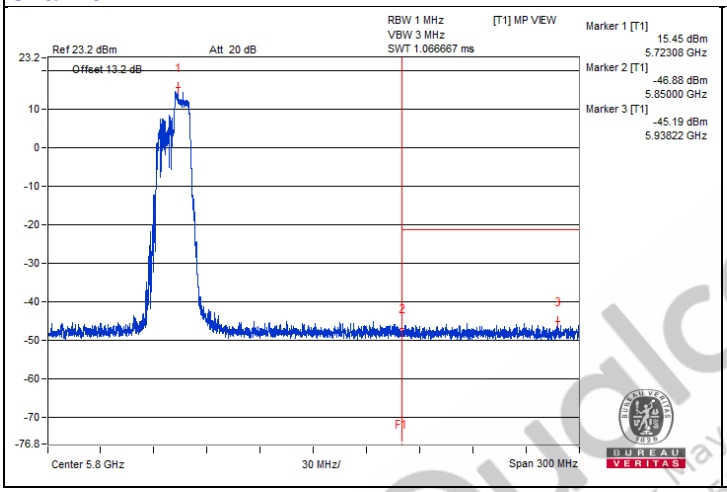

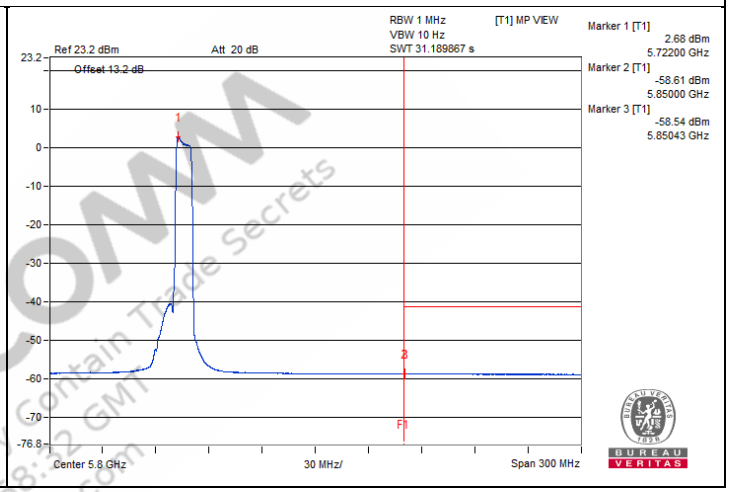

Chain 1

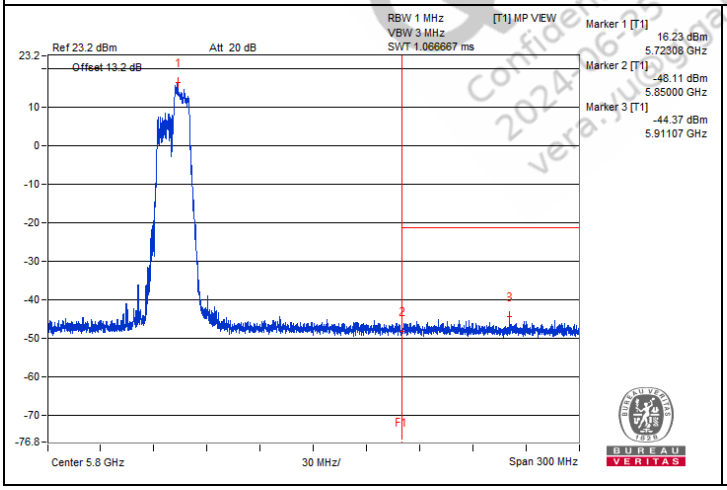

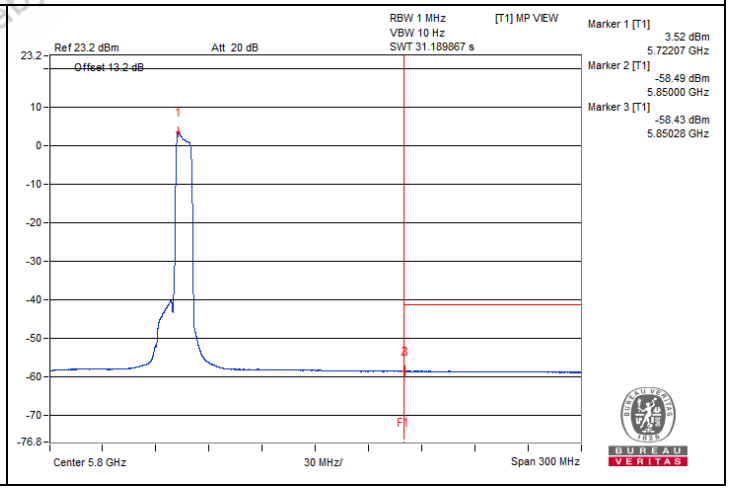

Qualcomm Confidential - May Contain Trade Secrets
2024-06-05 00:58:32 GMT
vera.jurgensbyte.com

802.11be (EHT20) 106-tone RU - Channel 149

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3812.5	61.85 PK	74	-12.15	-44.97	-44.24	8.17	-33.41
2	3823.43	50.13 AV	54	-3.87	-56.4	-56.23	8.17	-45.13
3	7650	59.75 PK	74	-14.25	-46.09	-47.39	8.17	-35.51
4	7678.12	48.42 AV	54	-5.58	-57.77	-58.28	8.17	-46.84
5	11501.56	59.25 PK	74	-14.75	-48	-46.5	8.17	-36.01
6	11470.31	48.67 AV	54	-5.33	-57.65	-57.9	8.17	-46.59
7	#17251.87	49.07 PK	68.2	-19.13	-57.45	-57.29	8.17	-46.19


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

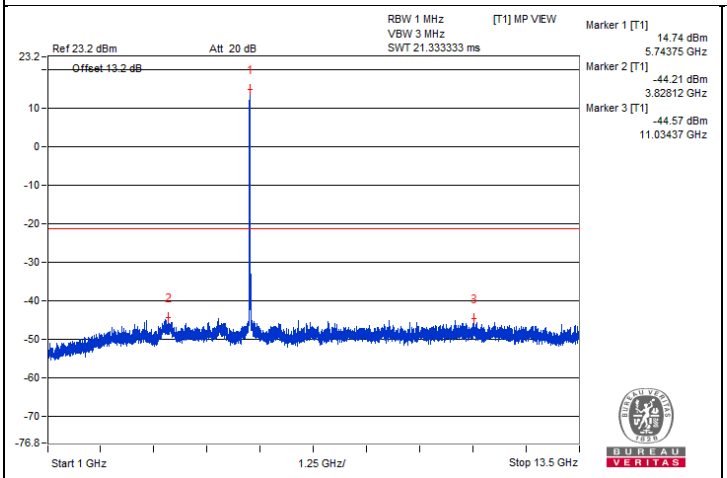


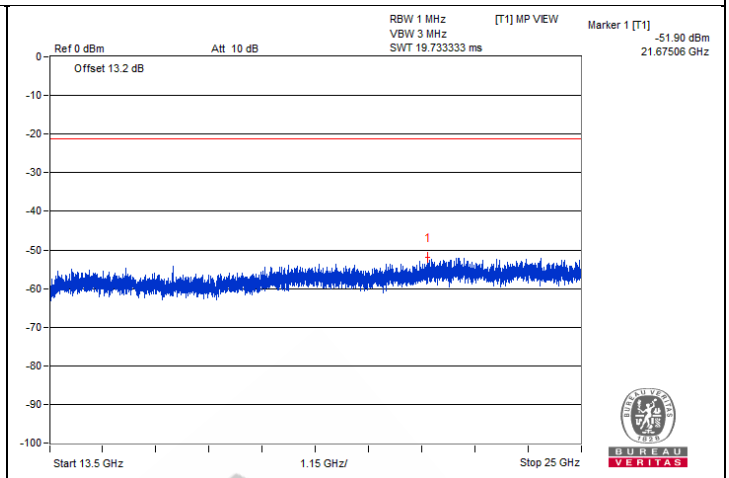

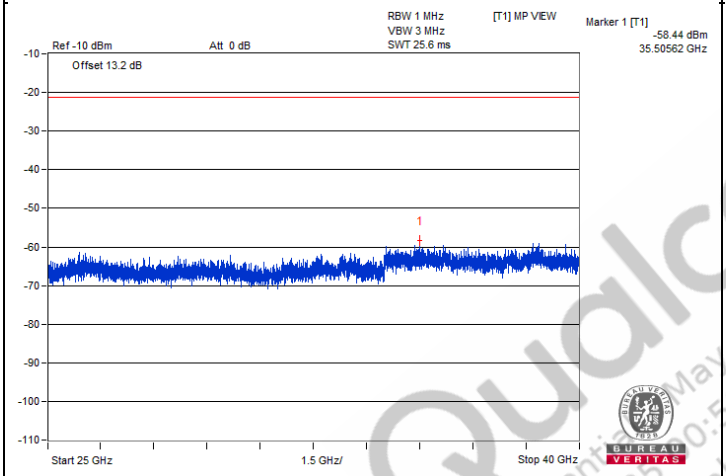

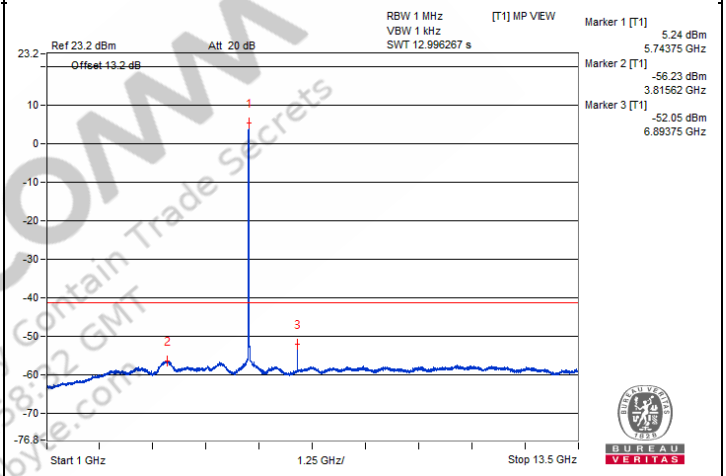


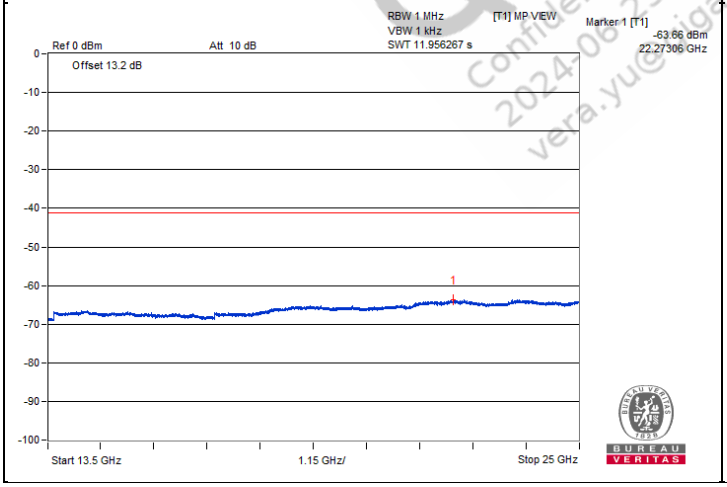


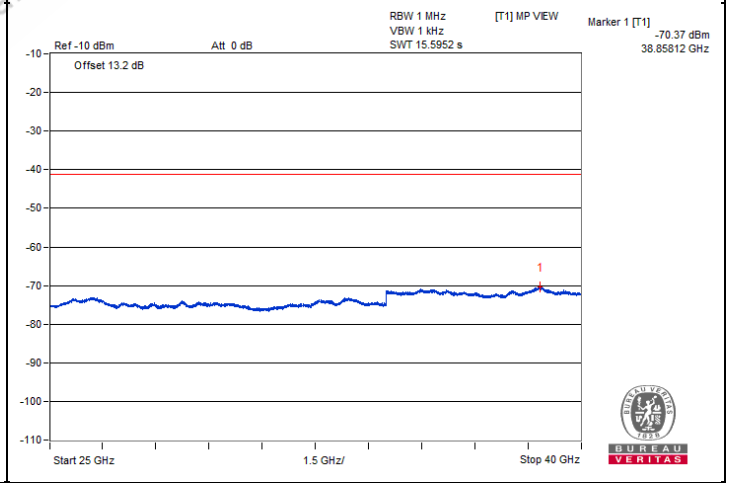



QualcOMM Confidential and May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

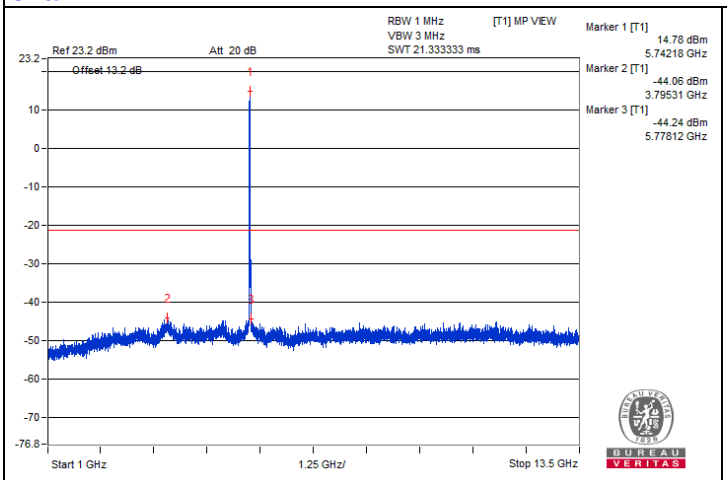


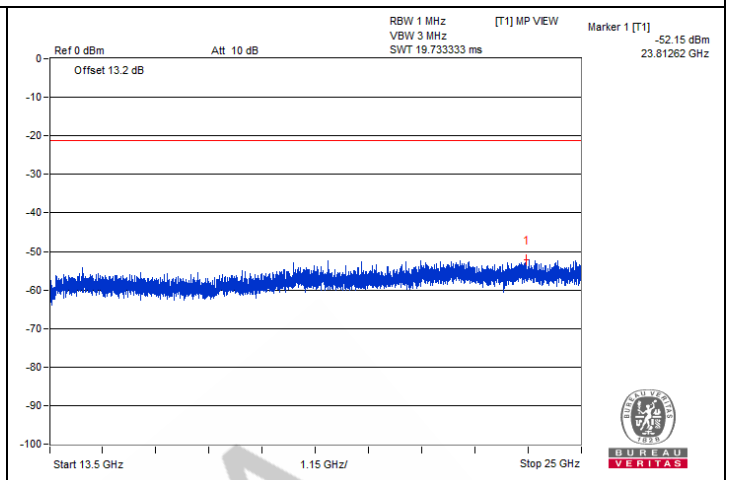

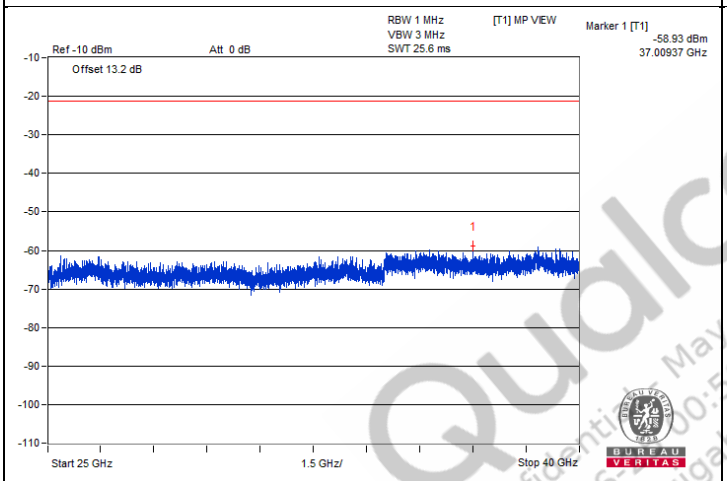

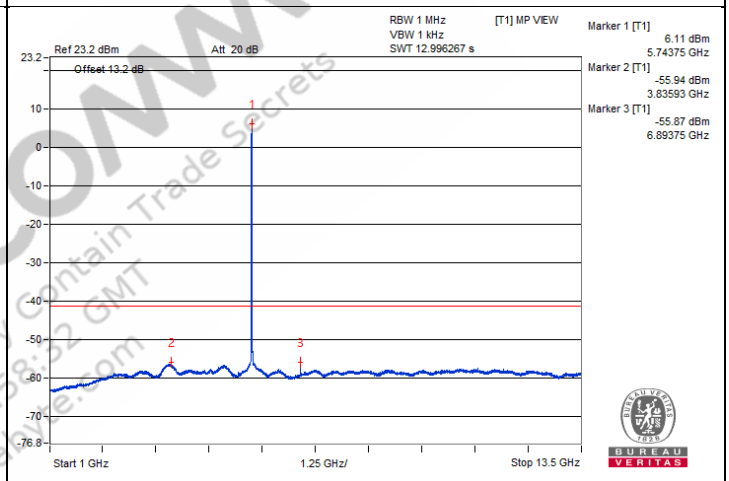

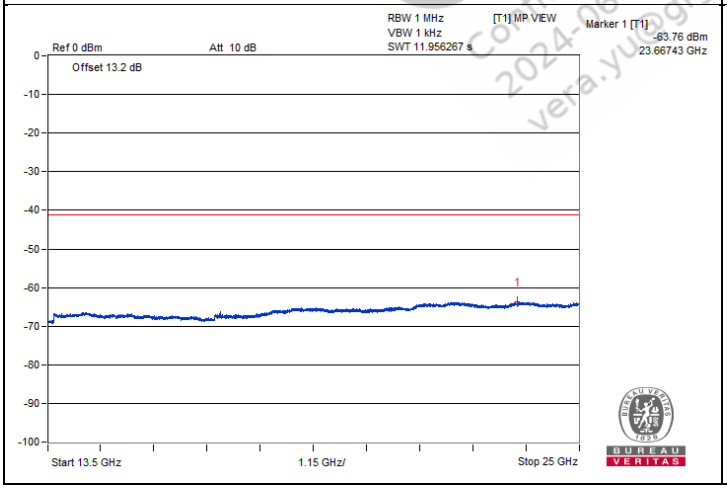


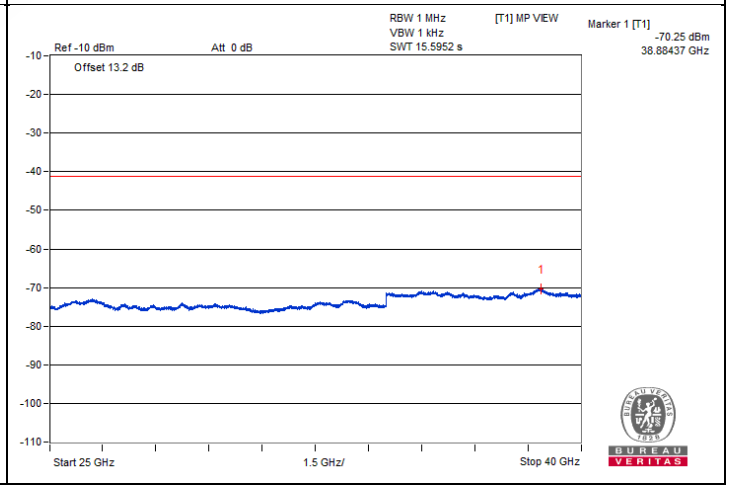

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

Chain 0

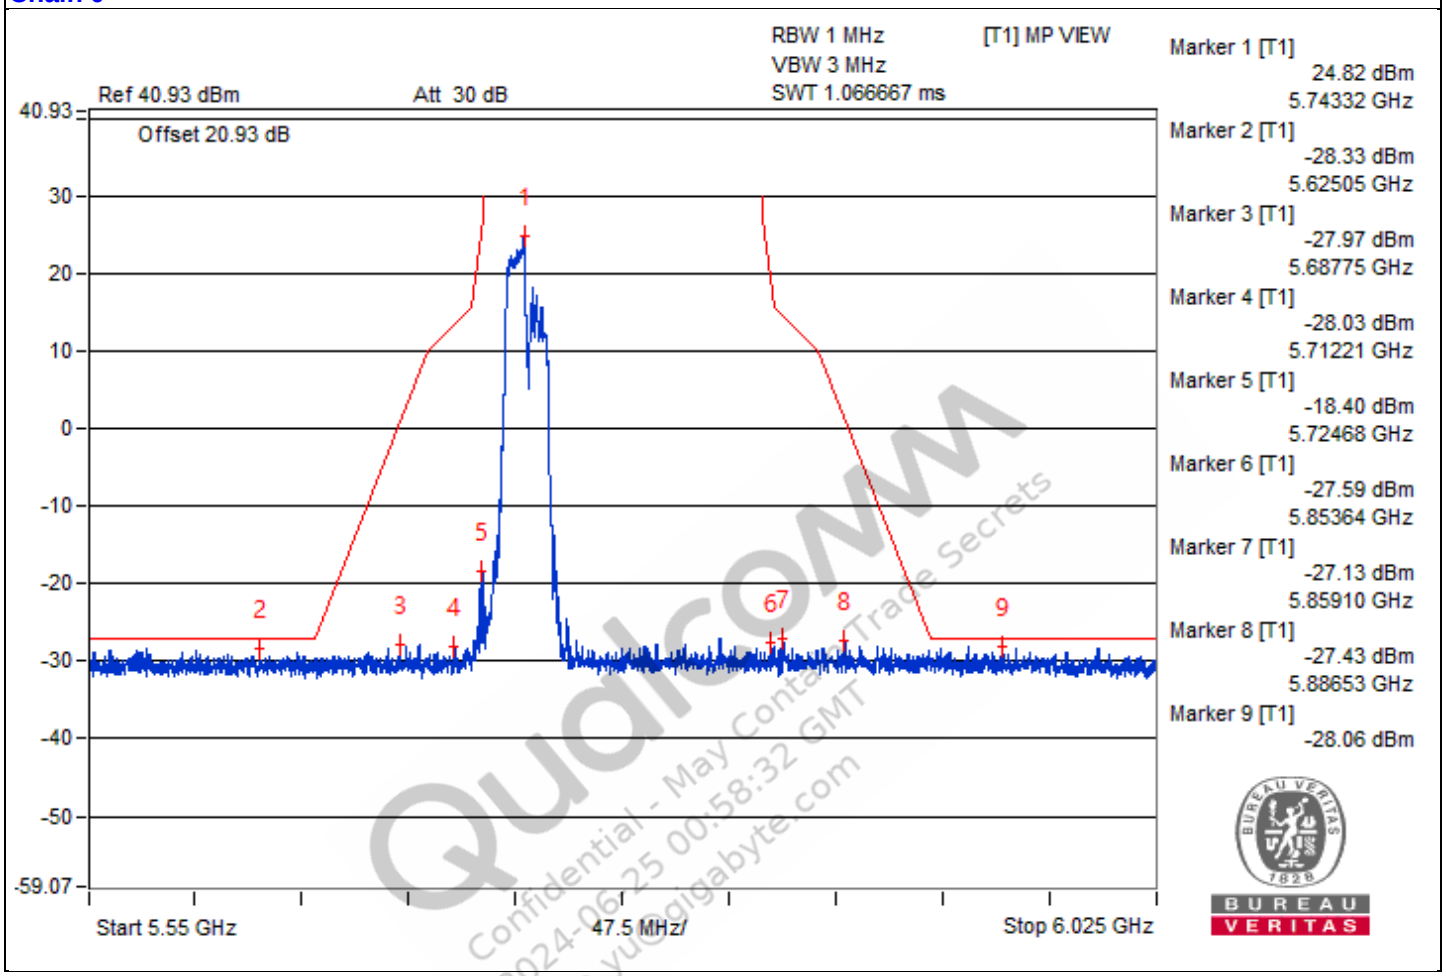

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

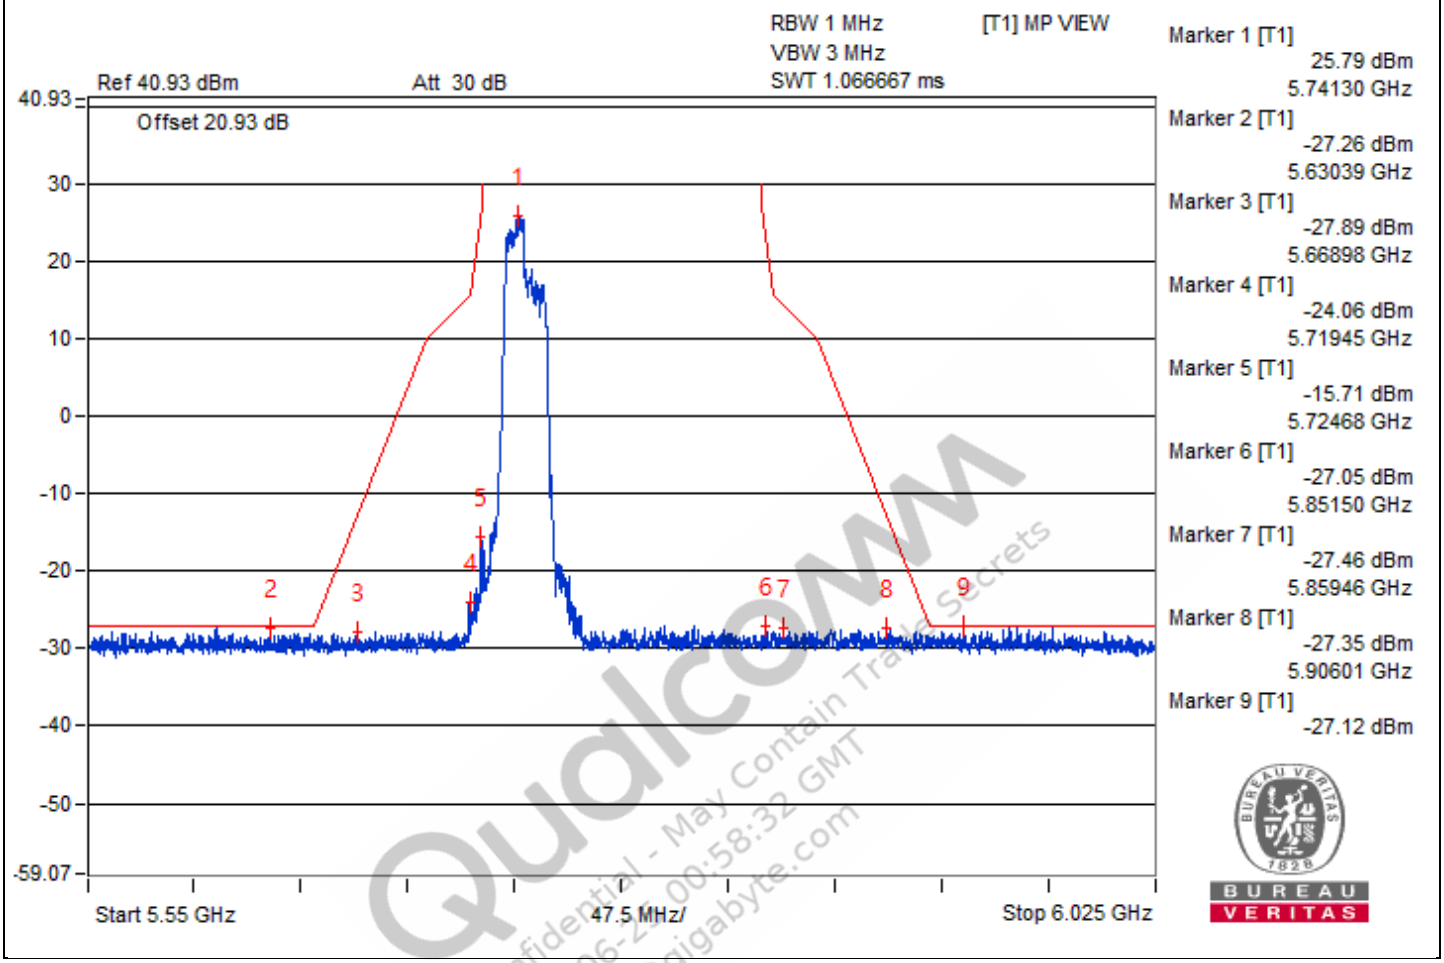

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT20) 106-tone RU - Channel 157

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3860.93	60.65 PK	74	-13.35	-46.8	-44.97	8.17	-34.61
2	3854.68	49.96 AV	54	-4.04	-56.46	-56.5	8.17	-45.30
3	7695.31	58.68 PK	74	-15.32	-47.61	-47.91	8.17	-36.58
4	7726.56	48.35 AV	54	-5.65	-58.18	-58	8.17	-46.91
5	11551.56	59.16 PK	74	-14.84	-47.62	-46.97	8.17	-36.10
6	11556.25	48.55 AV	54	-5.45	-57.94	-57.84	8.17	-46.71
7	#17361.12	49.41 PK	68.2	-18.79	-58.05	-56.2	8.17	-45.85


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

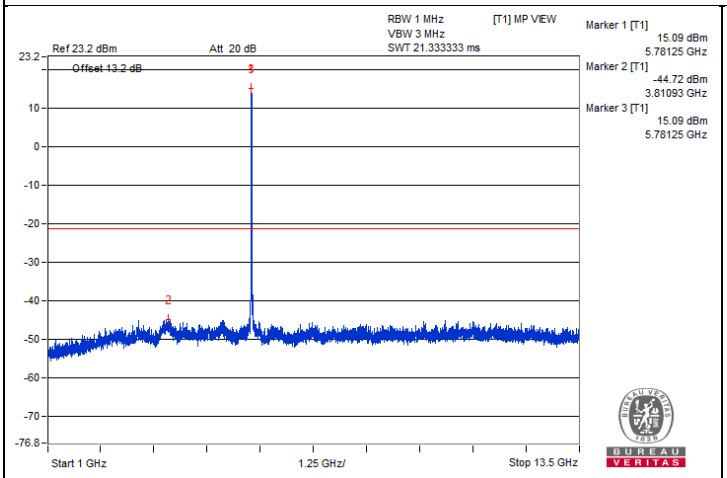


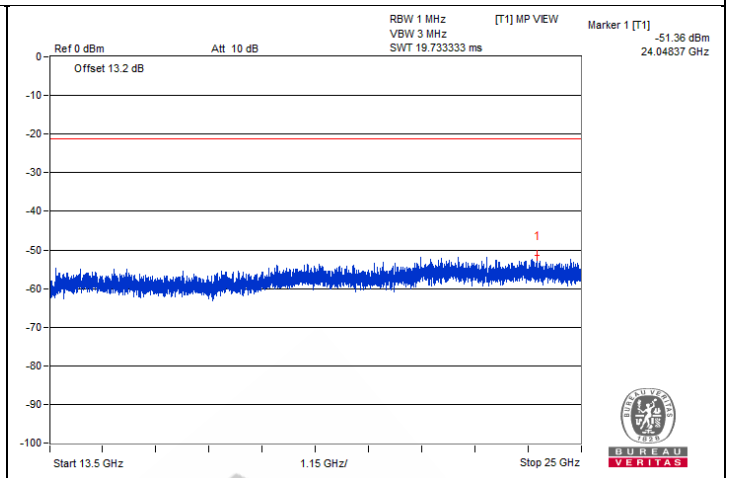

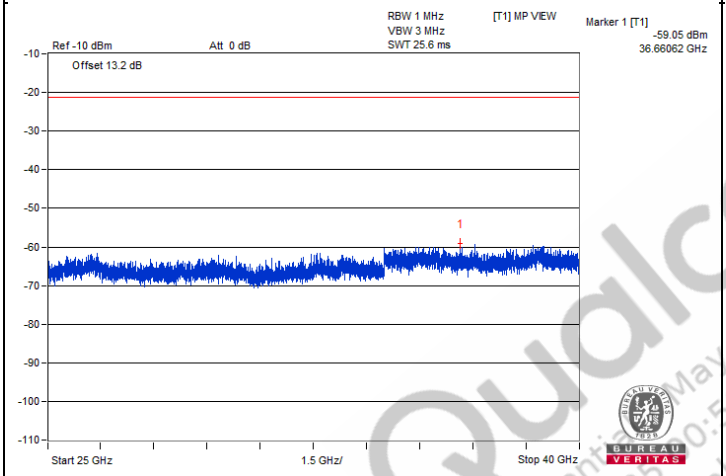

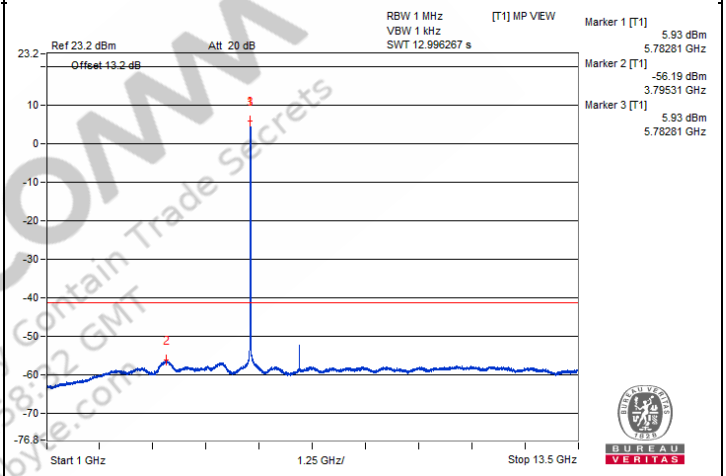


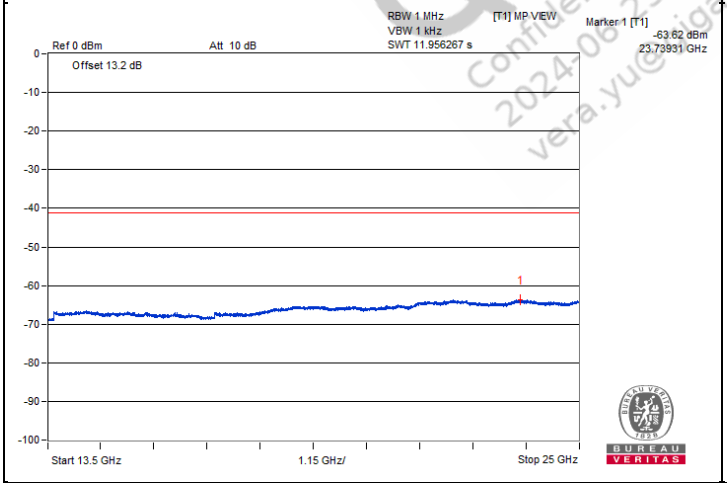


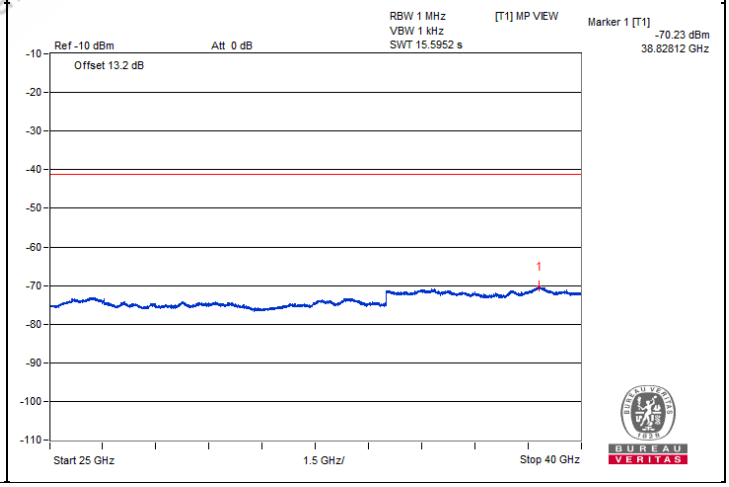



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

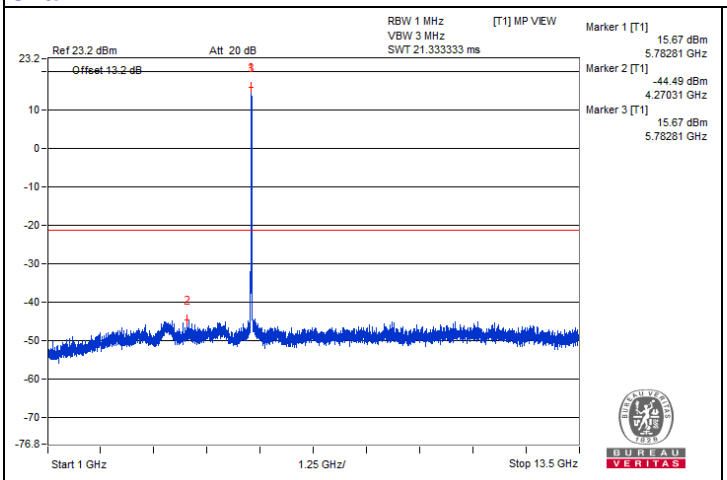


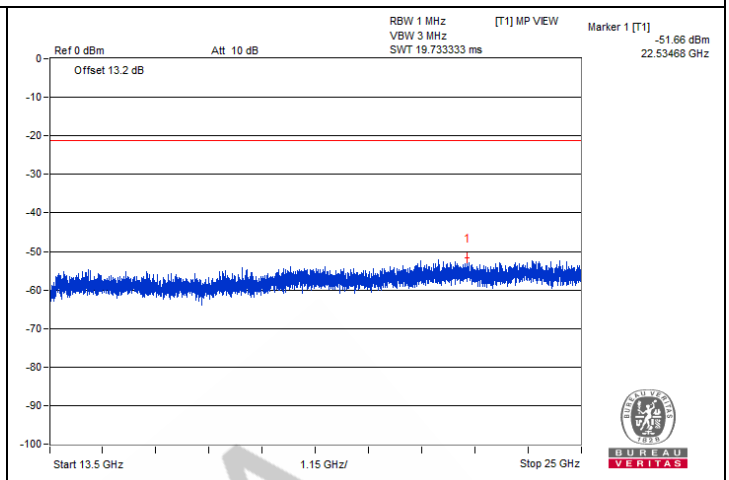

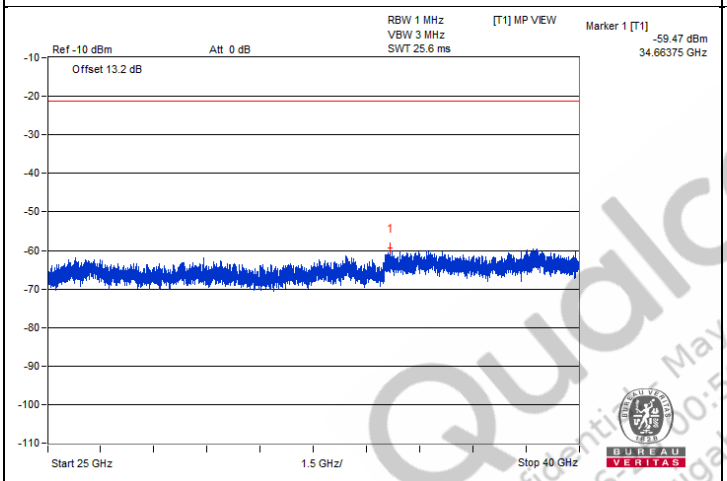

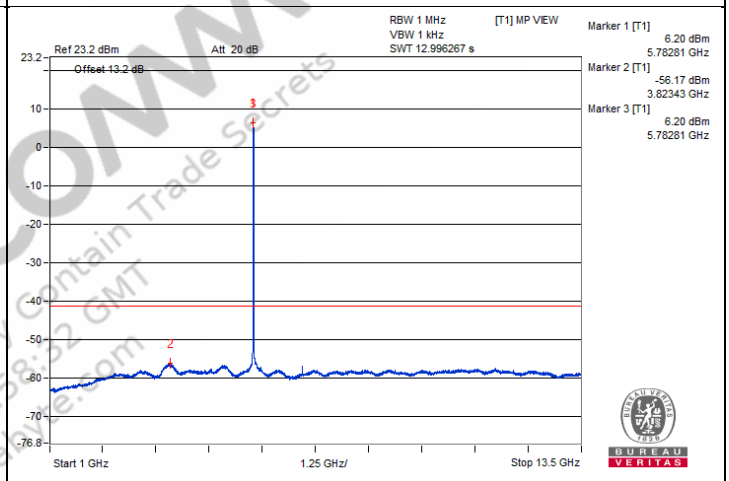

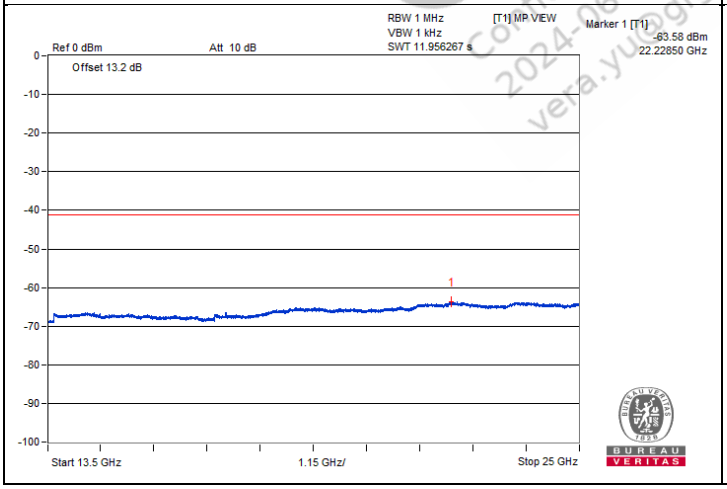


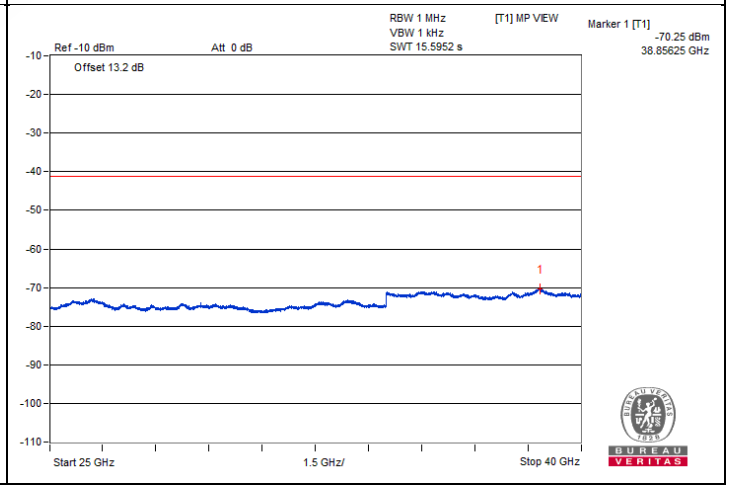

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@bgatvre.com


Bandedge table

Chain 0

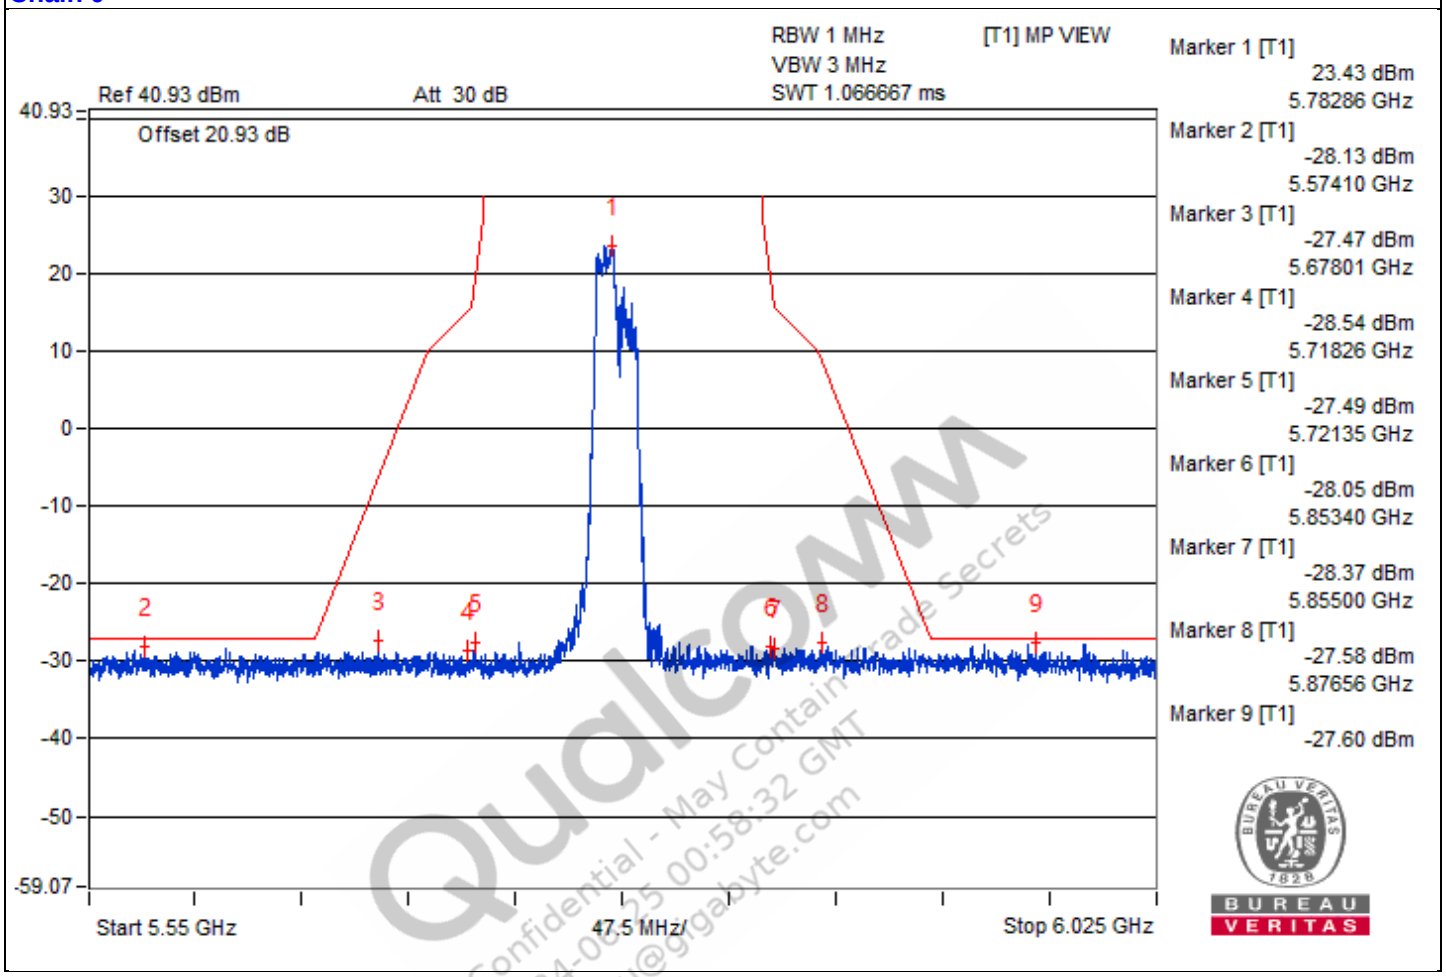

Qualcomm
Confidential - May Contain Trade Secrets
2024-08-25 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

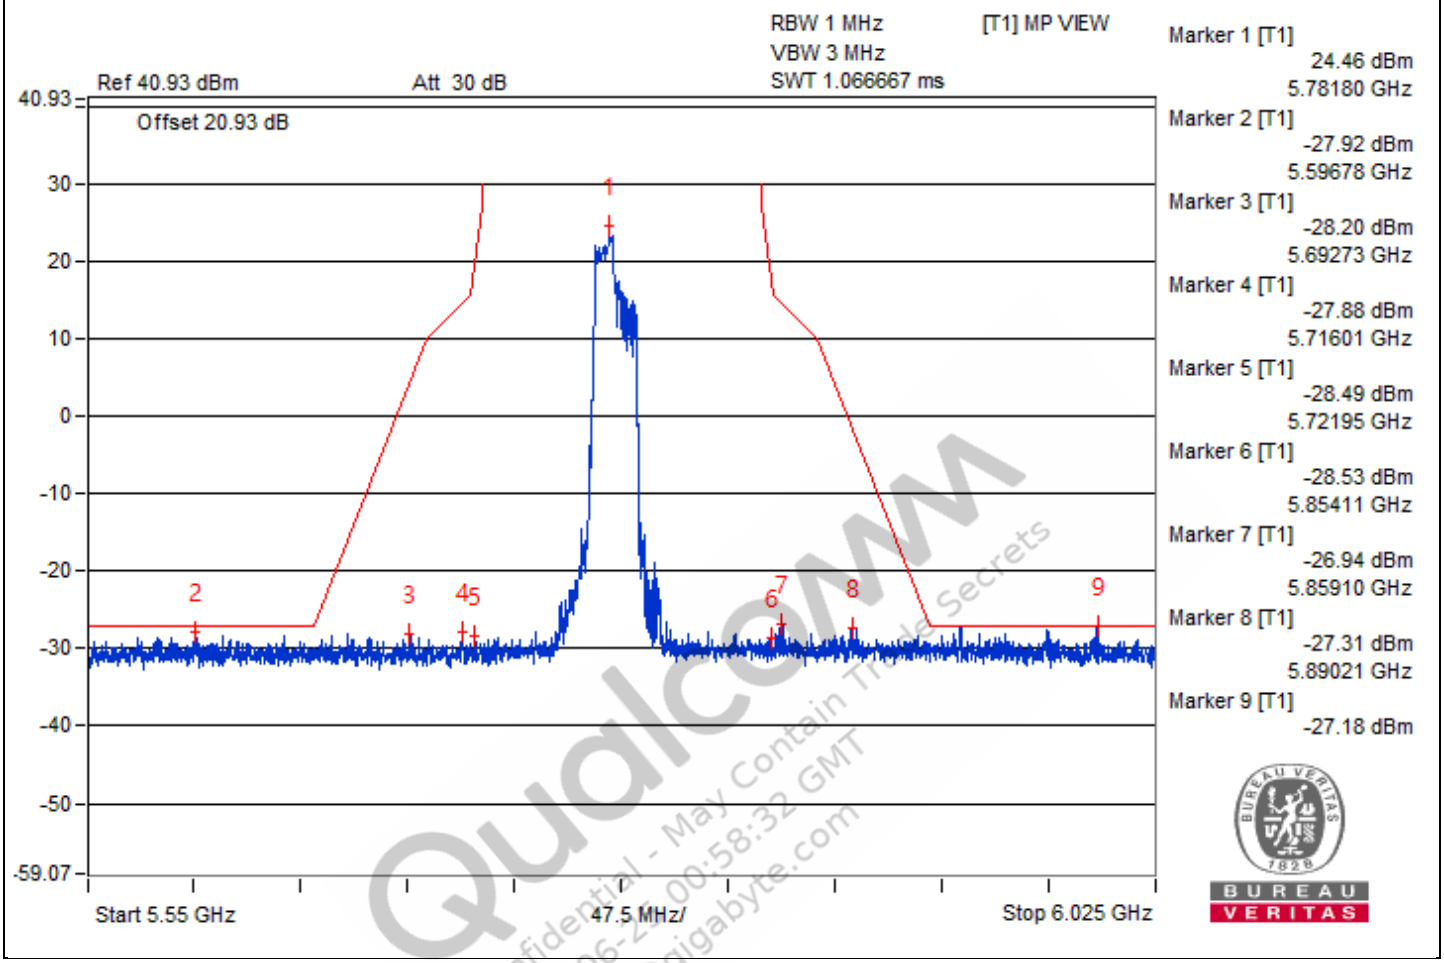

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT20) 106-tone RU - Channel 165

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3878.12	60.41 PK	74	-13.59	-46.47	-45.64	8.17	-34.85
2	3865.62	49.77 AV	54	-4.23	-56.63	-56.71	8.17	-45.49
3	#7781.25	58.7 PK	68.2	-9.5	-47.38	-48.13	8.17	-36.56
4	11648.43	59.34 PK	74	-14.66	-46.6	-47.67	8.17	-35.92
5	11667.18	48.43 AV	54	-5.57	-57.98	-58.04	8.17	-46.83
6	#17460.31	49.32 PK	68.2	-18.88	-56.08	-58.5	8.17	-45.94


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

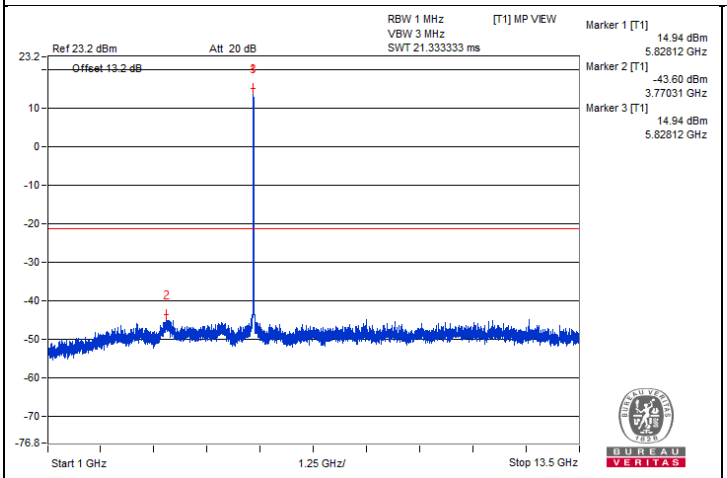


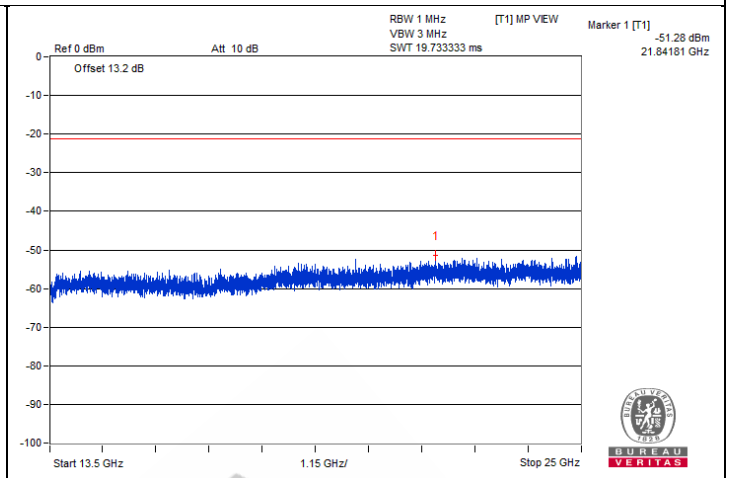

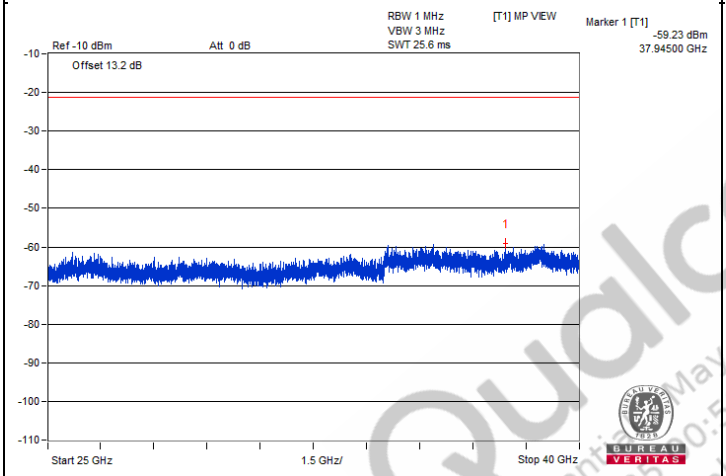

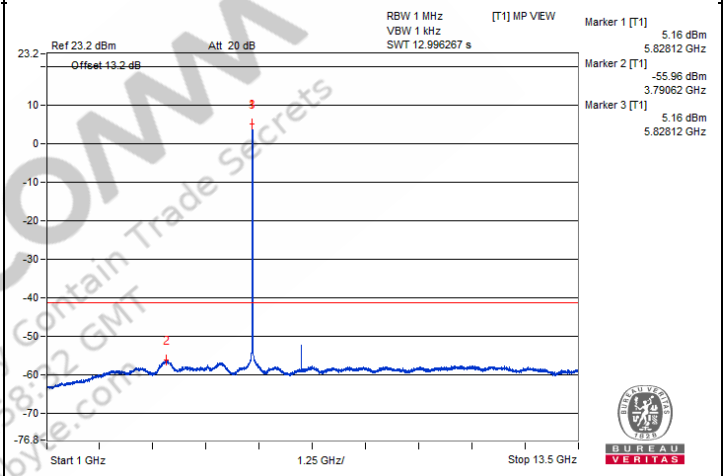


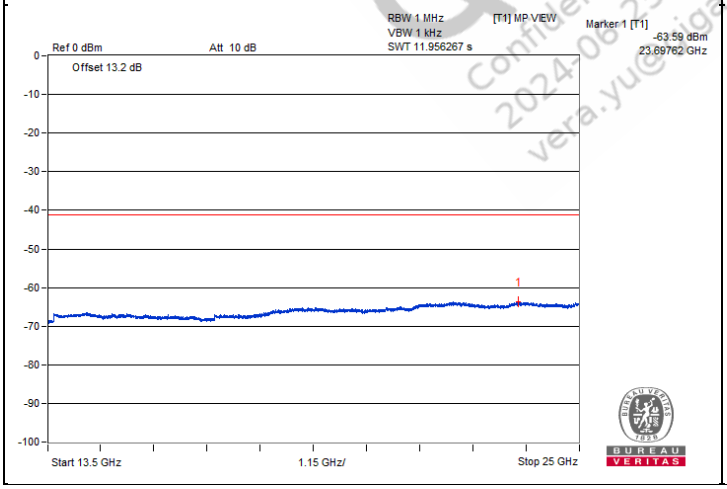


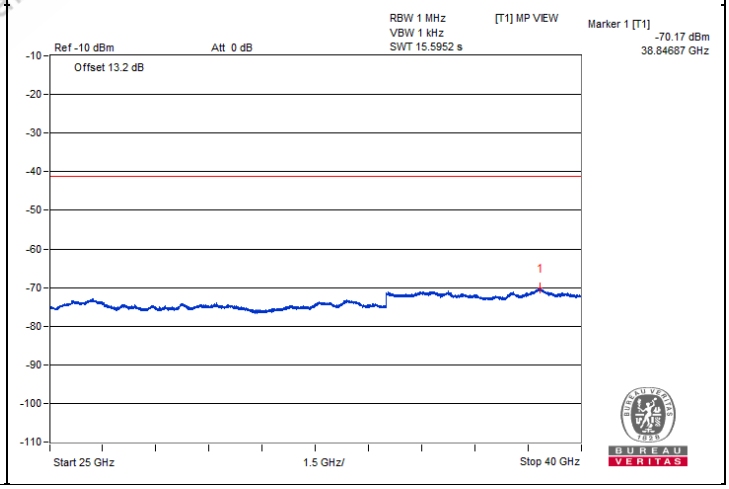



QualComm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yue@gigabyte.com


Chain 1

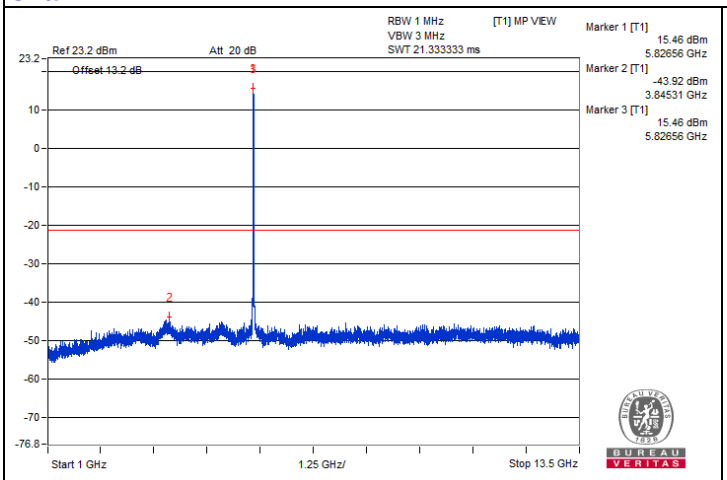


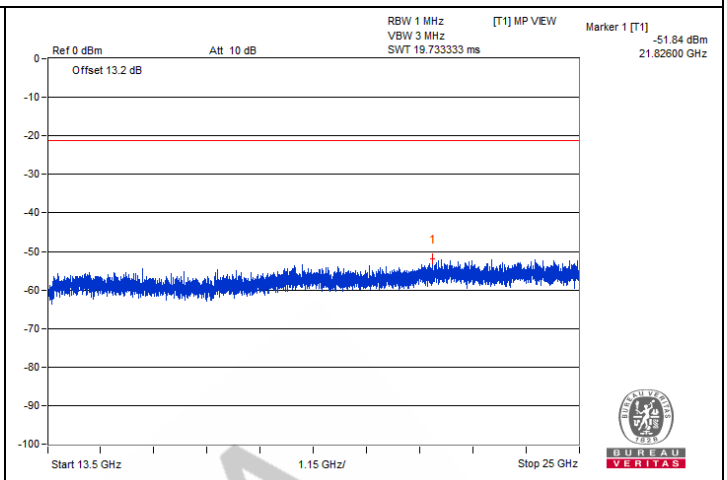

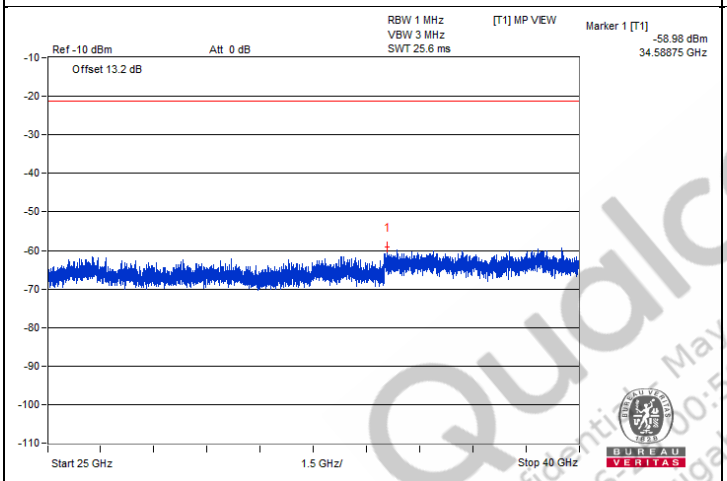

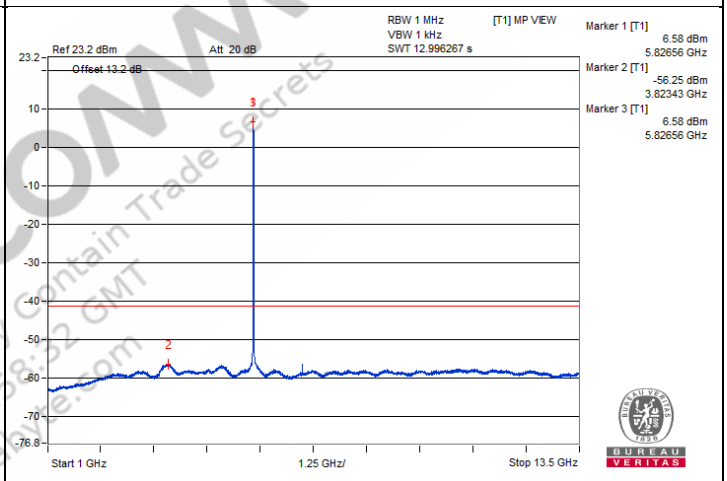

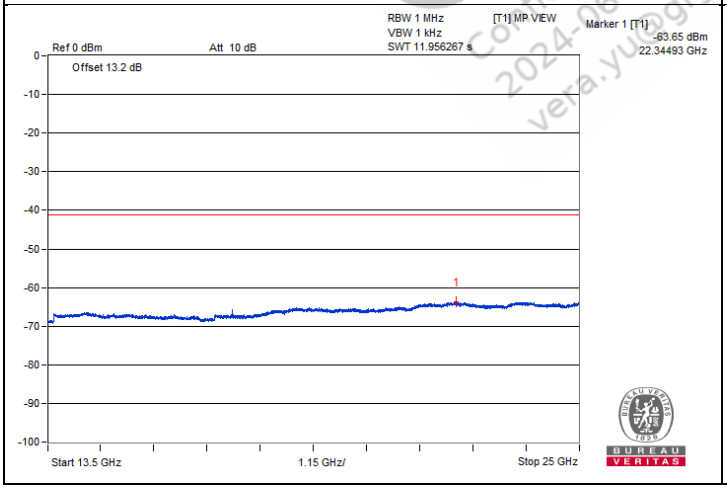


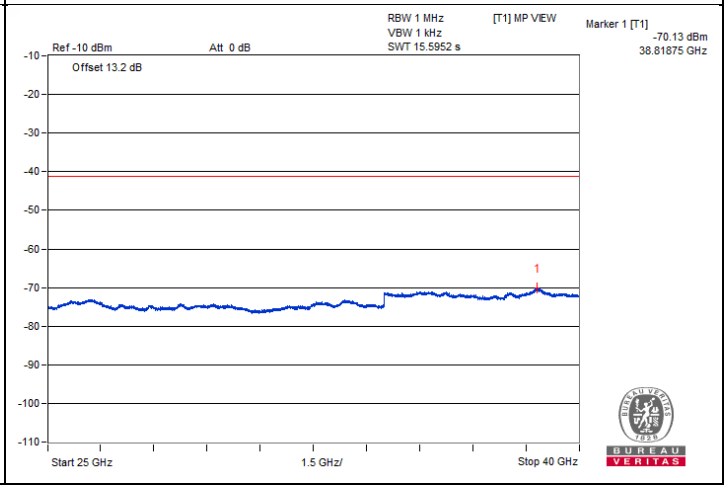

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@qualcomm.com


Bandedge table

Chain 0

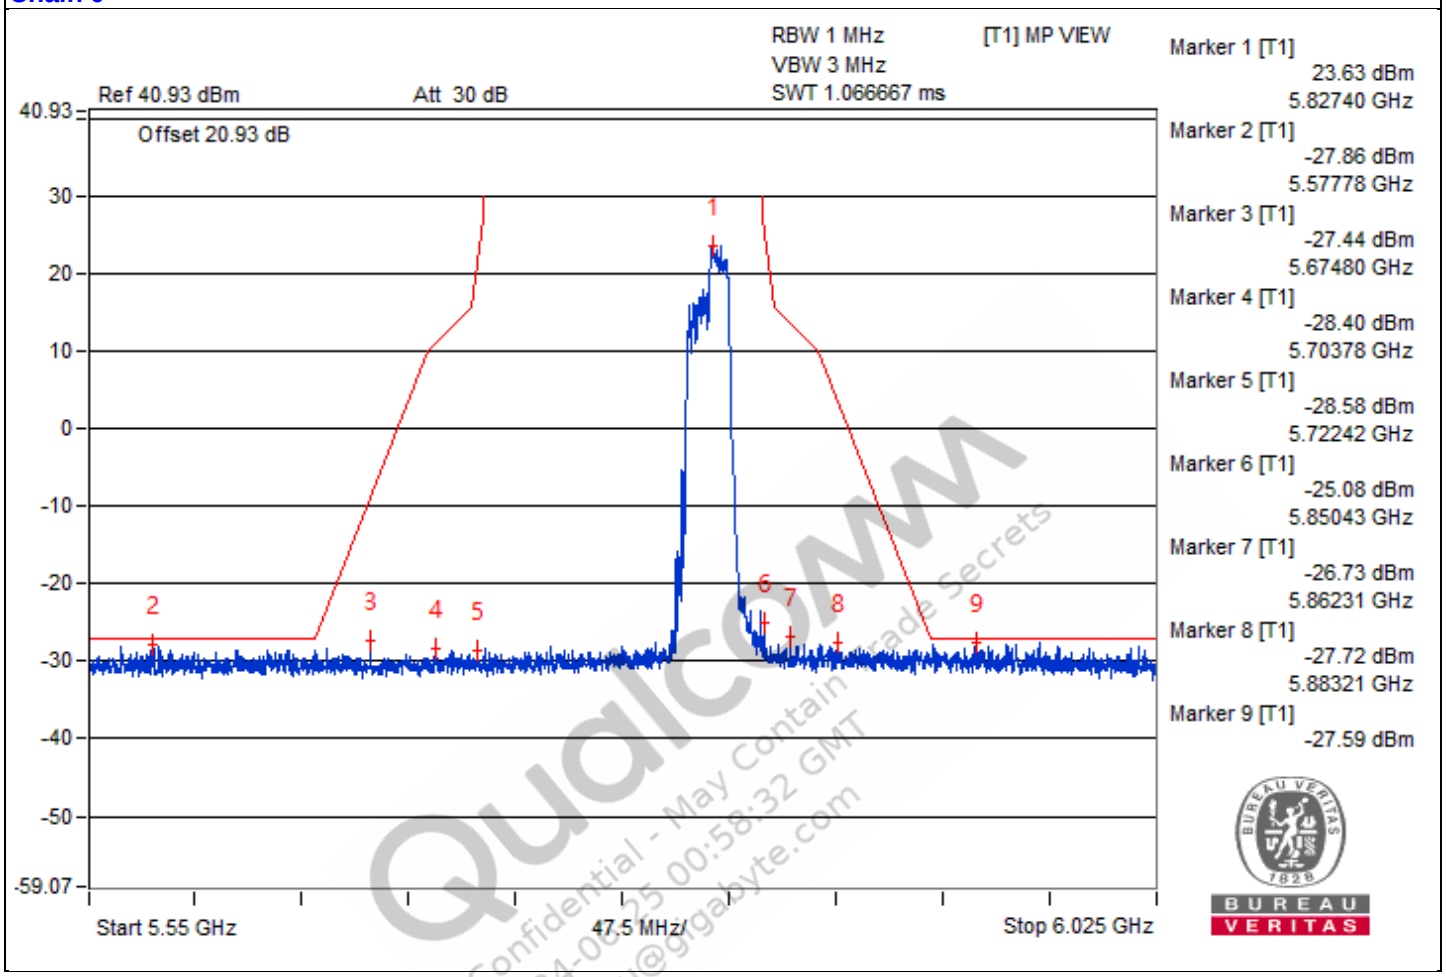

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

Chain 1

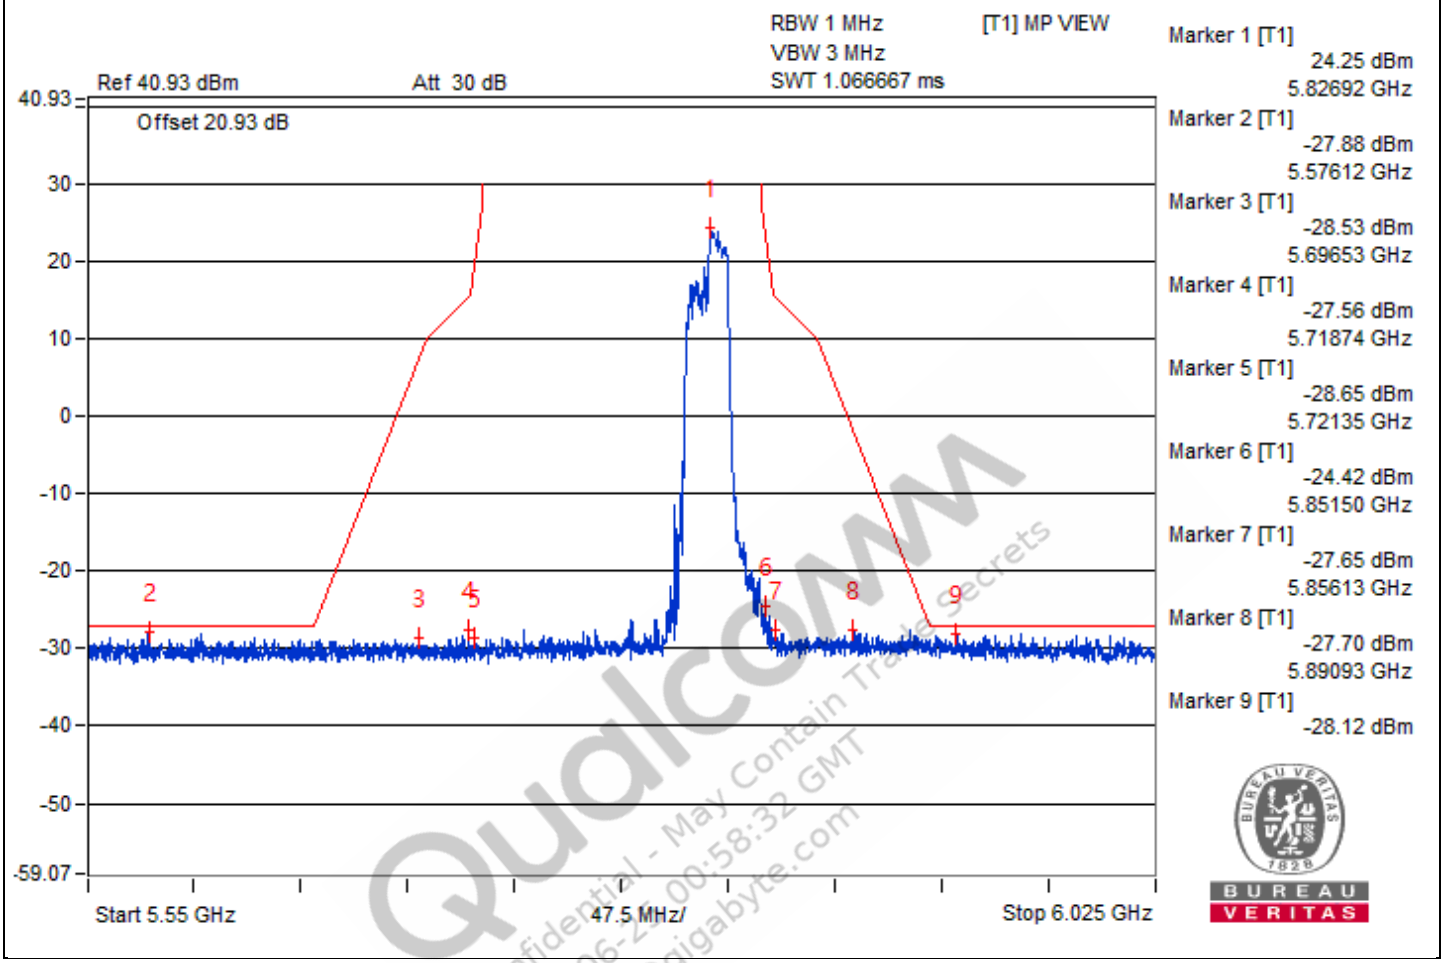

Qualcomm
Confidential - May Contain Trade secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT80) 996-tone RU - Channel 42


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5141.97	69.19 PK	74	-4.81	-36.65	-34.5	6.36	-26.07
2	5150	51.73 AV	54	-2.27	-53.54	-52.34	6.36	-43.53

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

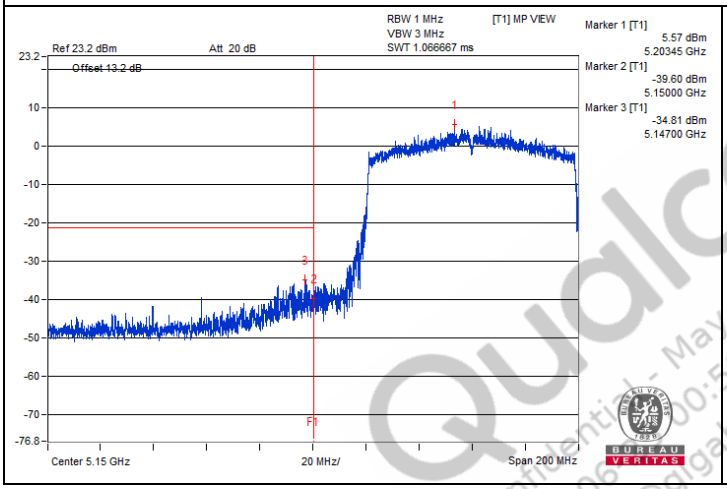

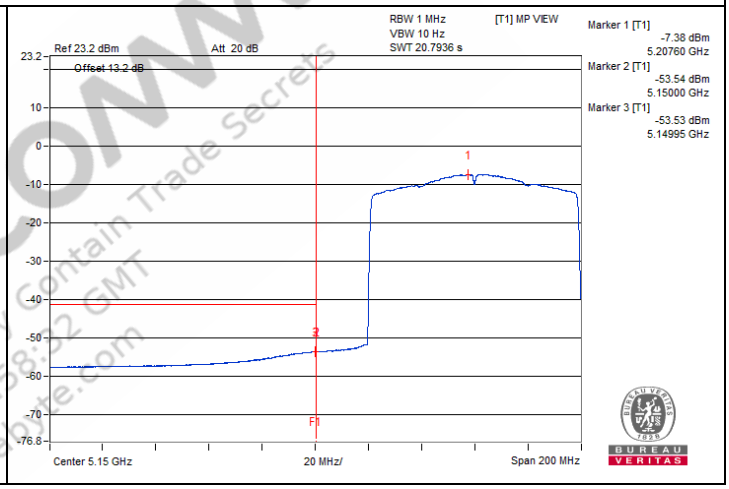

Chain 1

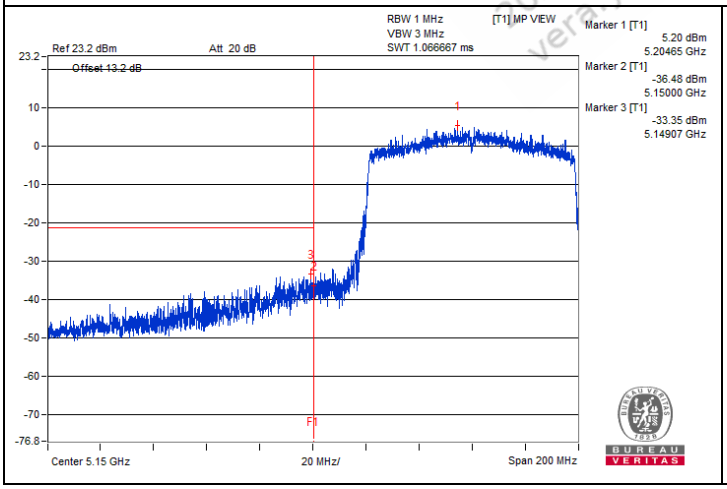

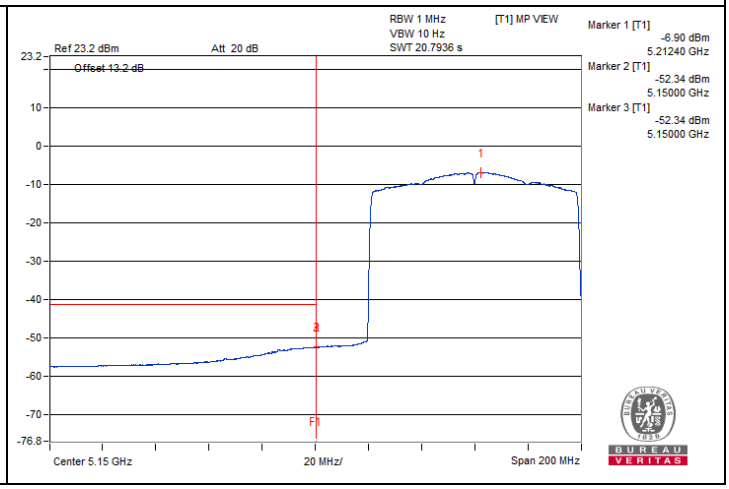

Qualcomm Confidential - May Contain Trade Secrets
2024-06-10 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT80) 996-tone RU - Channel 58


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5356.55	68.6 PK	74	-5.4	-42.39	-33.63	6.43	-26.66
2	5352.9	52.92 AV	54	-1.08	-52.86	-50.92	6.43	-42.34

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

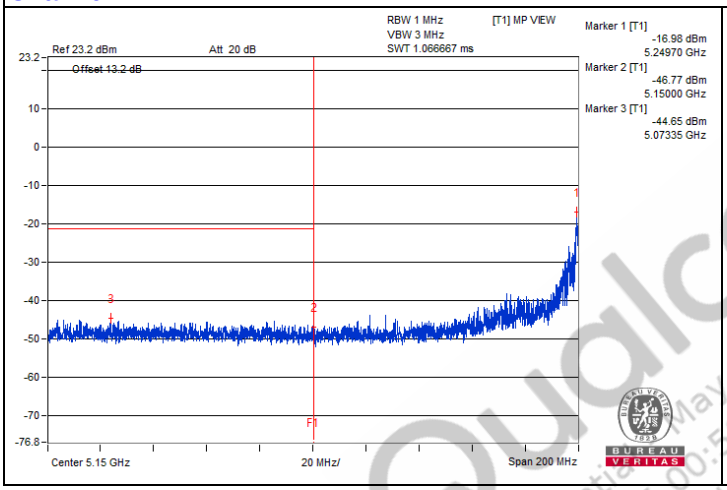

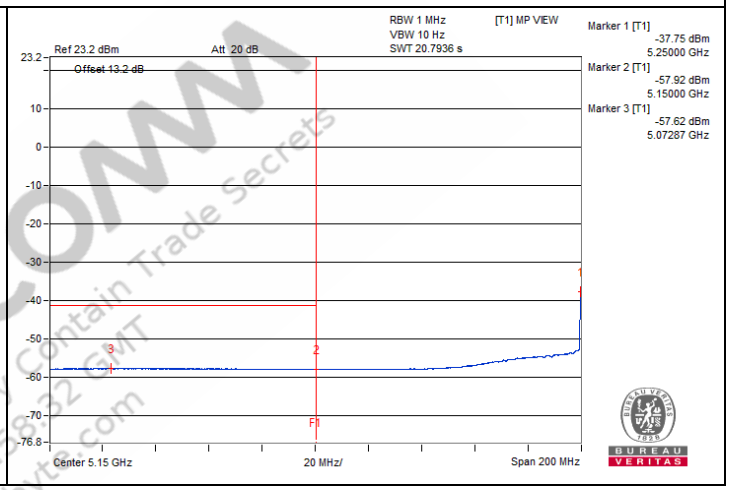

Chain 1

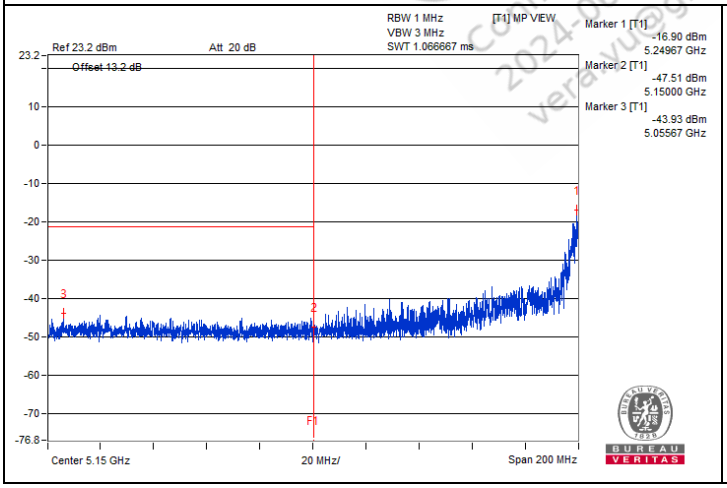

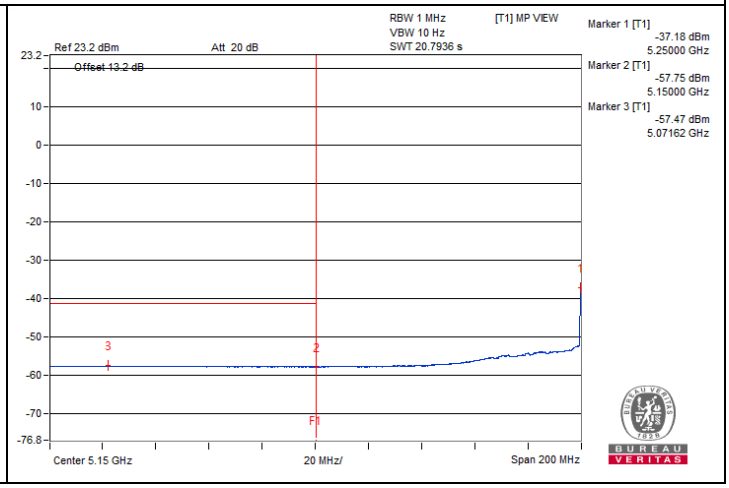

Qualcomm Confidential and Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT160) 2x996-tone RU - Channel 50


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5112.95	73.43 PK	74	-0.57	-47.72	-28.31	6.43	-21.83
2	5097.57	48.4 AV	54	-5.6	-56.64	-55.99	6.43	-46.86


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

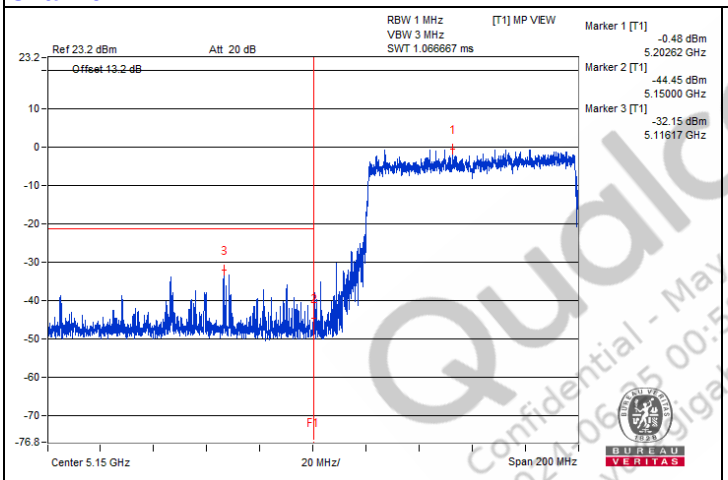

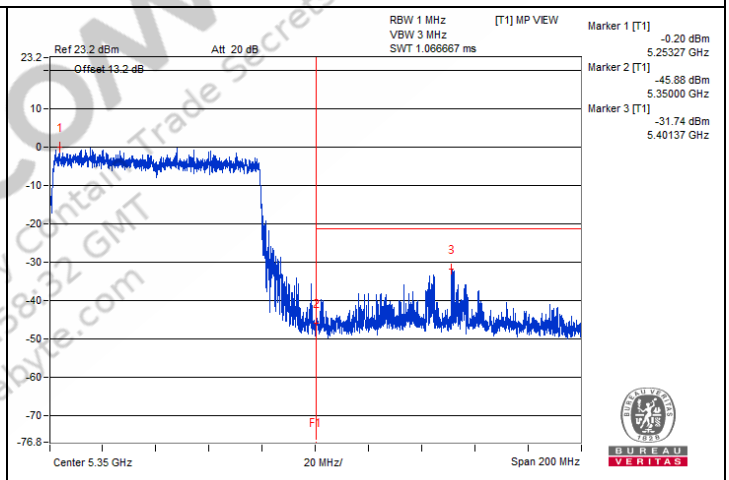


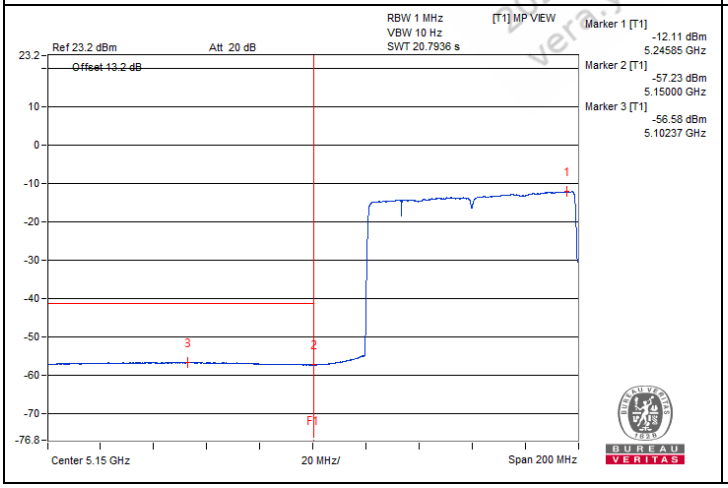


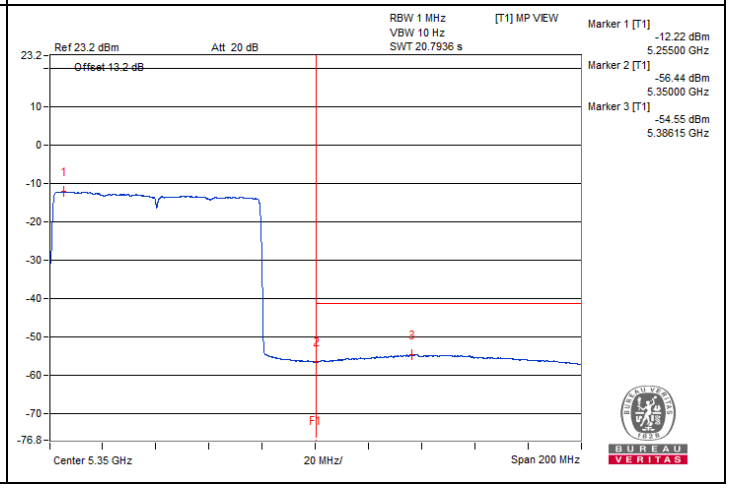



Qualcomm Confidential - May Contain Trade Secrets 2024-06-05 00:58:32 GMT vera.vu@gigabyte.com

Chain 1

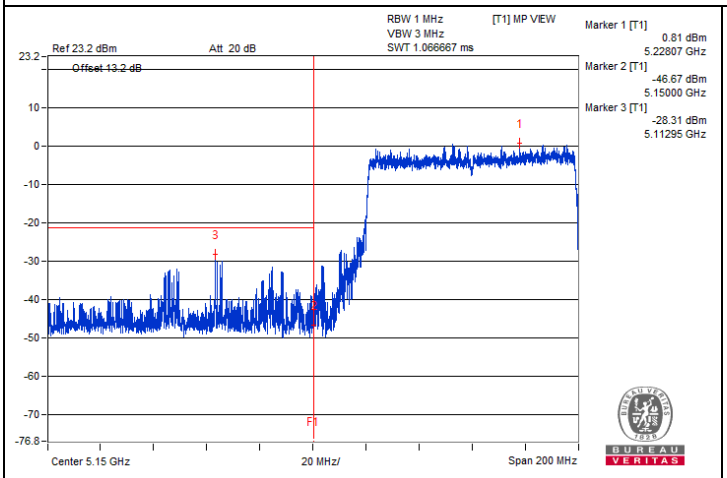

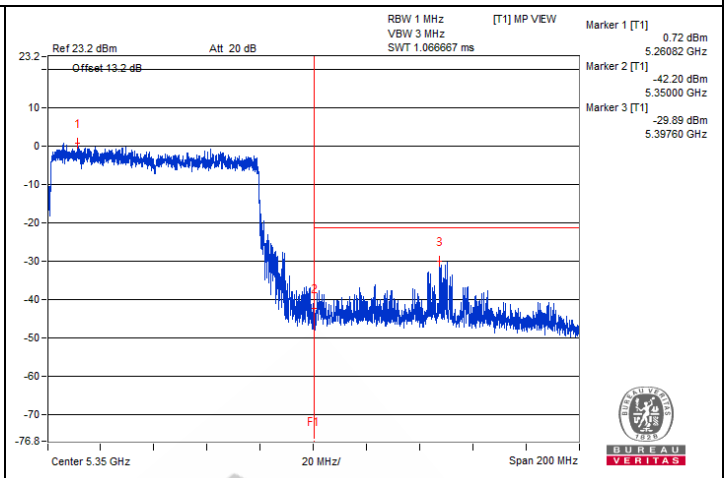

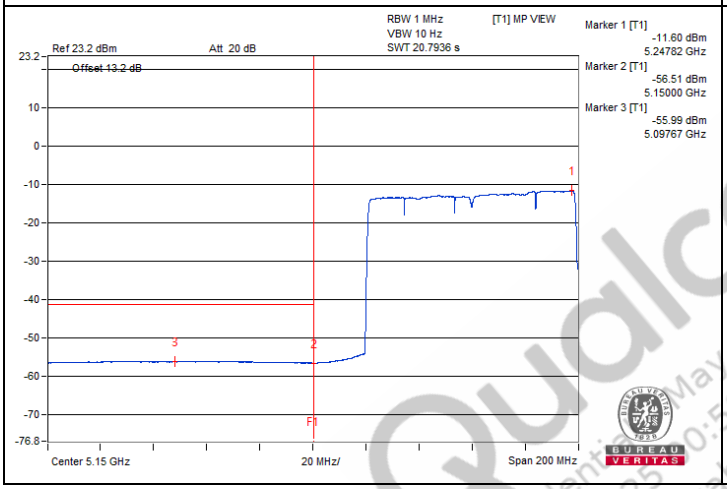

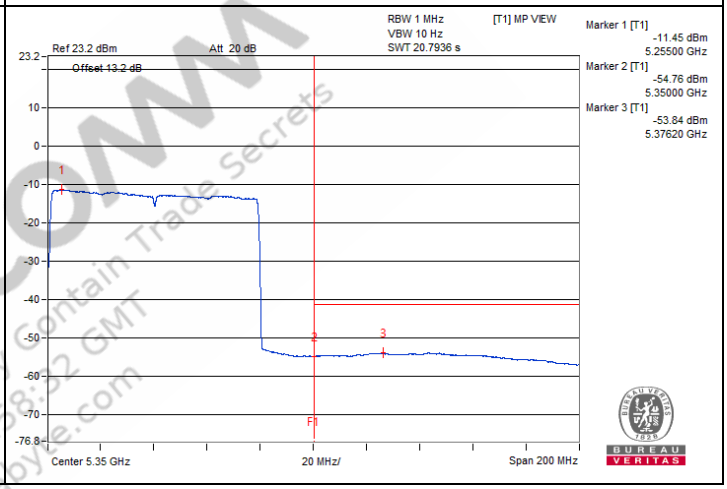

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT160) 2x996-tone RU - Channel 114


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5460.53	66.44 PK	68.2	-1.76	-36.98	-47.88	7.82	-28.82

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

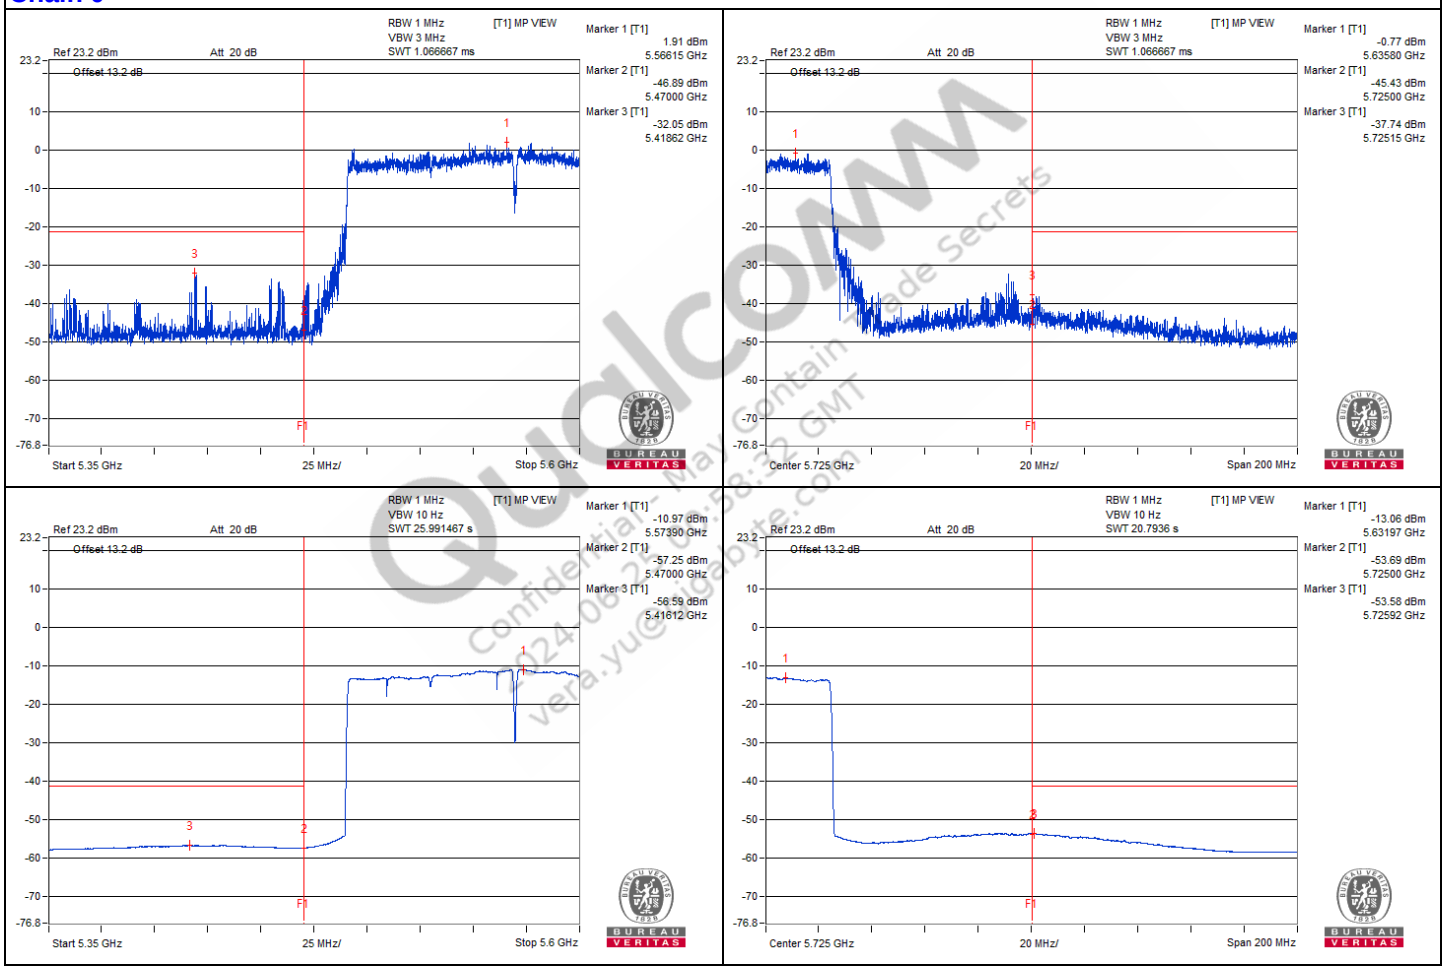



QualcOMM Confidential – May Contain Trade Secrets 2024-06-27 06:58:32 GMT vera.yue@gabyte.com

Chain 1

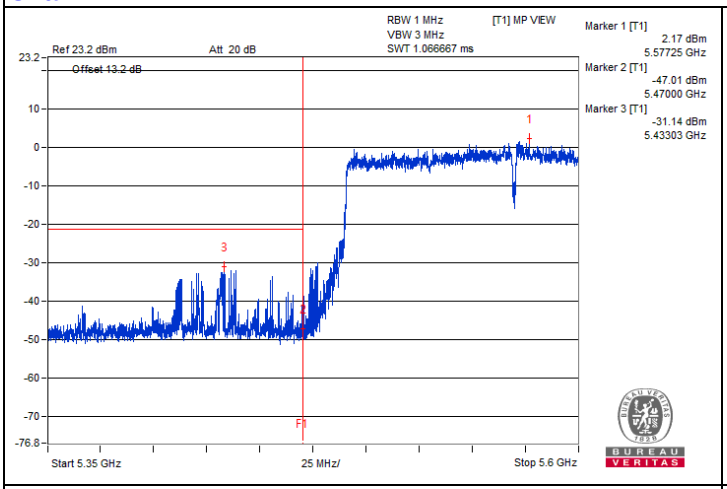

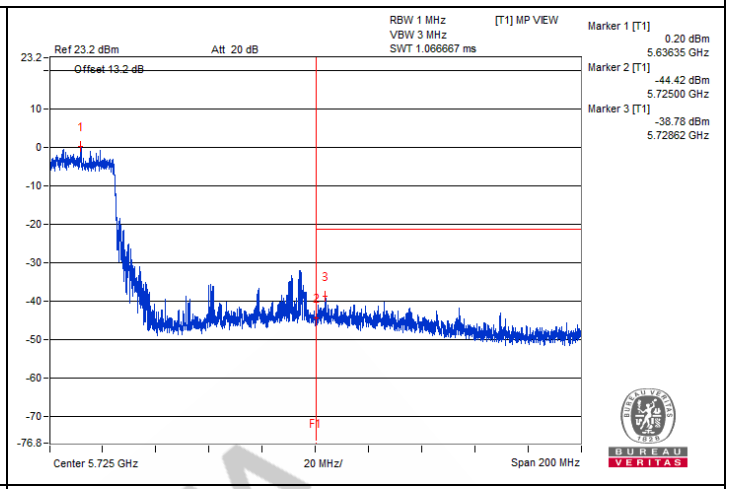

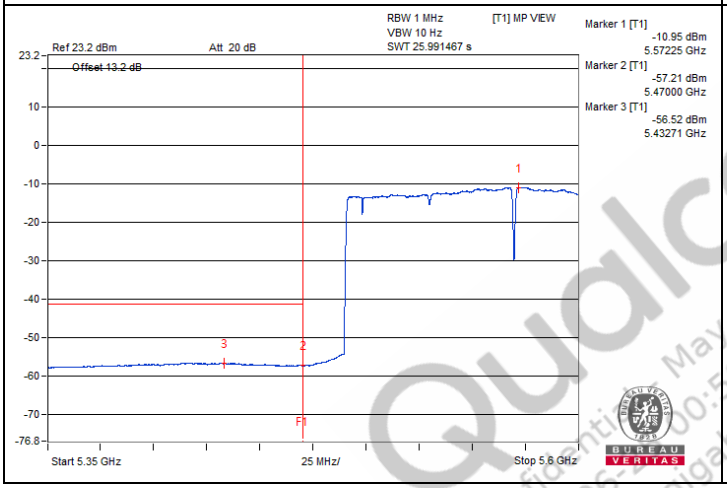

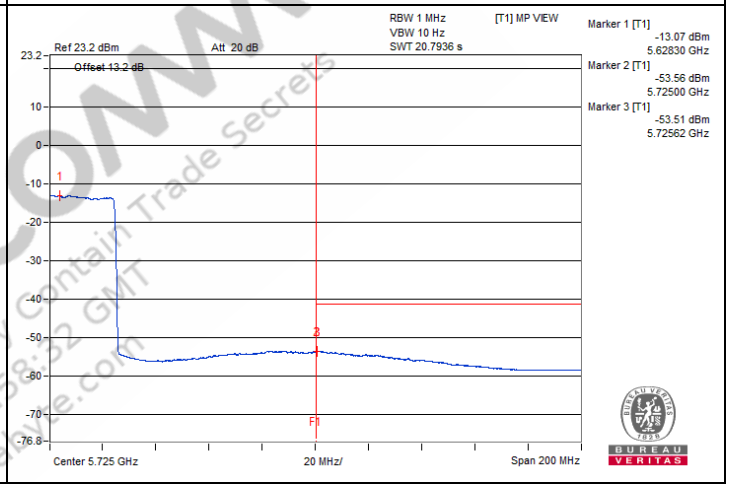

QualcOMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigahive.com

802.11be (EHT20) 52+26-tone RU - Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3462.5	57.72 PK	68.2	-10.48	-49.46	-48.08	8.17	-37.54
2	#6951.56	59.14 PK	68.2	-9.06	-46.14	-48.89	8.17	-36.12
3	#10395.31	59.21 PK	68.2	-8.99	-46.36	-48.31	8.17	-36.05
4	15618.87	49.07 PK	74	-24.93	-57.59	-57.16	8.17	-46.19
5	15593	39.53 AV	54	-14.47	-67.15	-66.69	8.17	-55.73


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

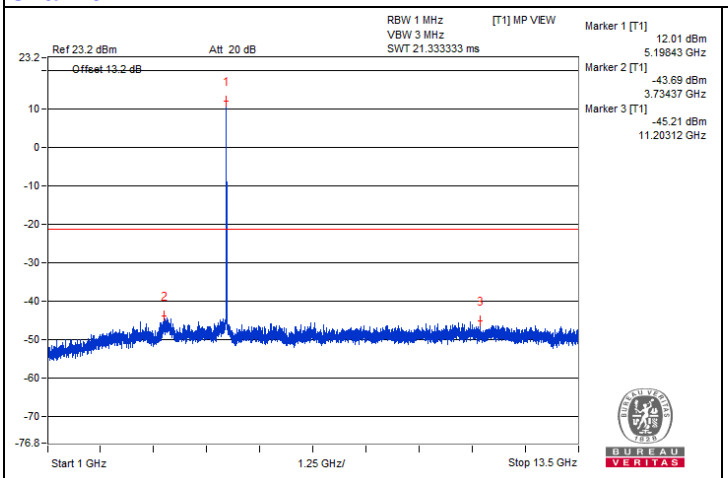


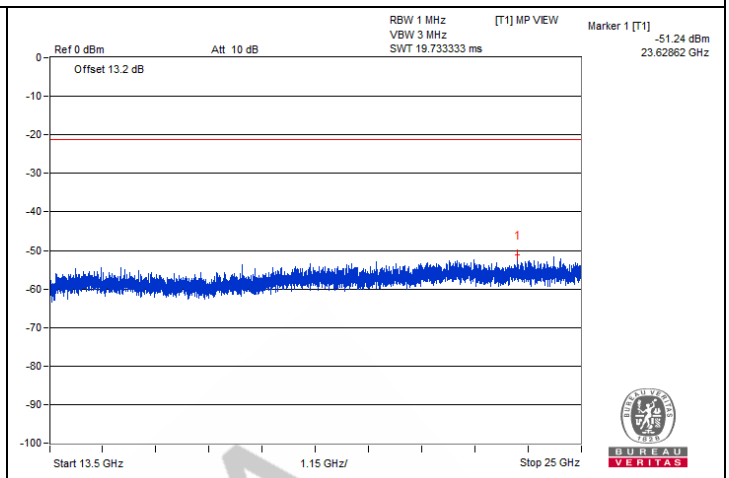

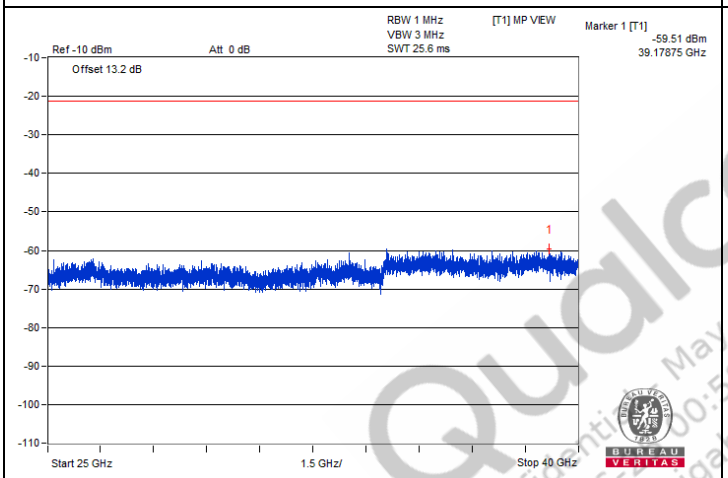

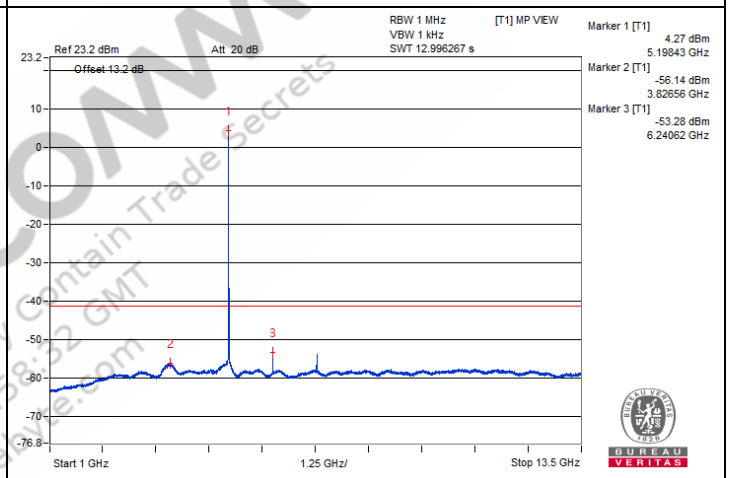


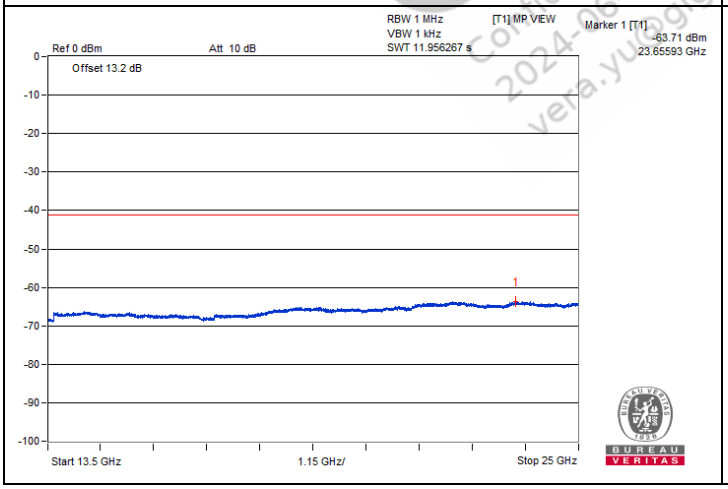


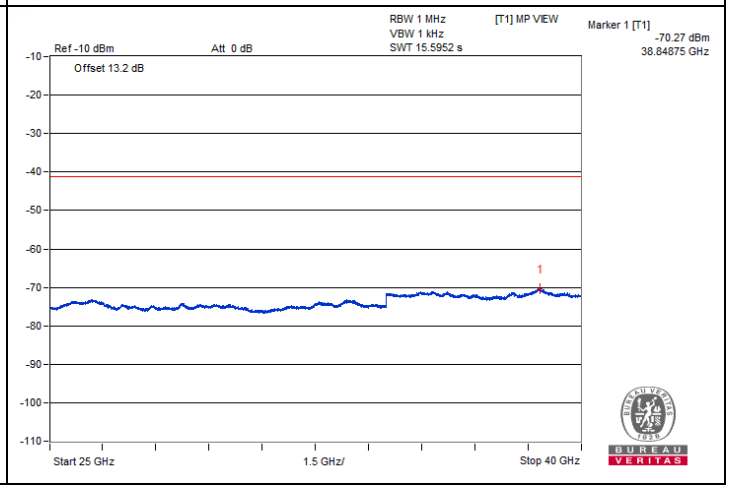



QualcoMM
Confidential - May Contain Trade Secrets
2024-06-21 00:58:32 GMT
vera.yu@gigahive.com


Chain 1

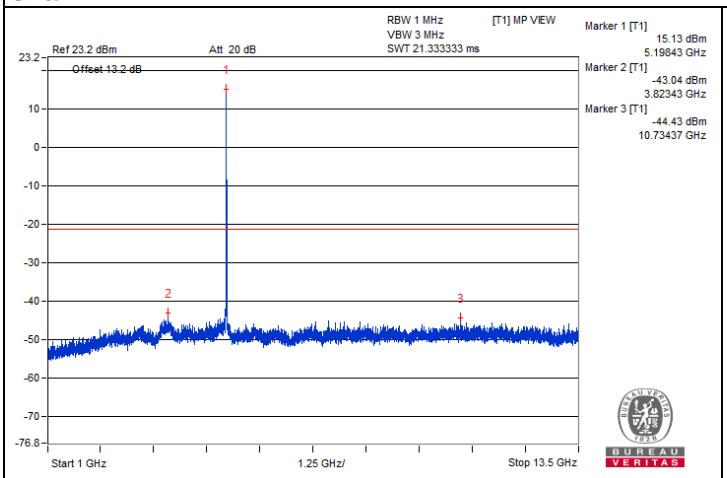


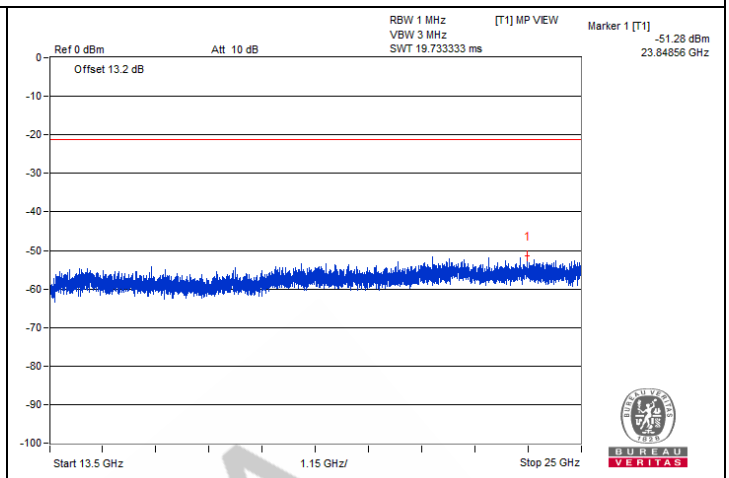

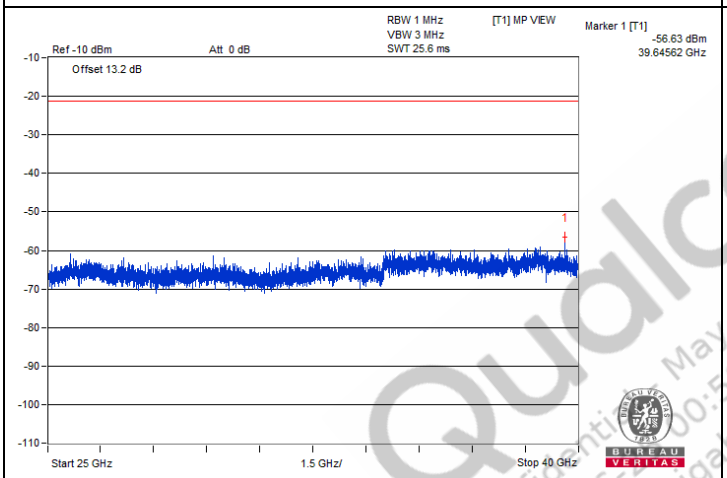

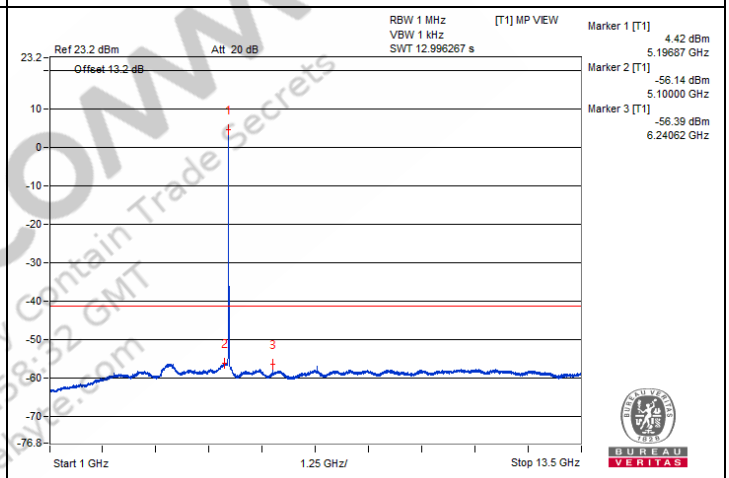

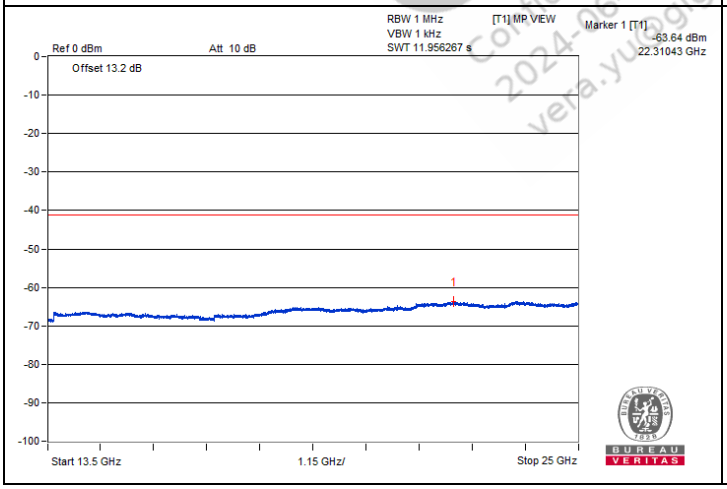

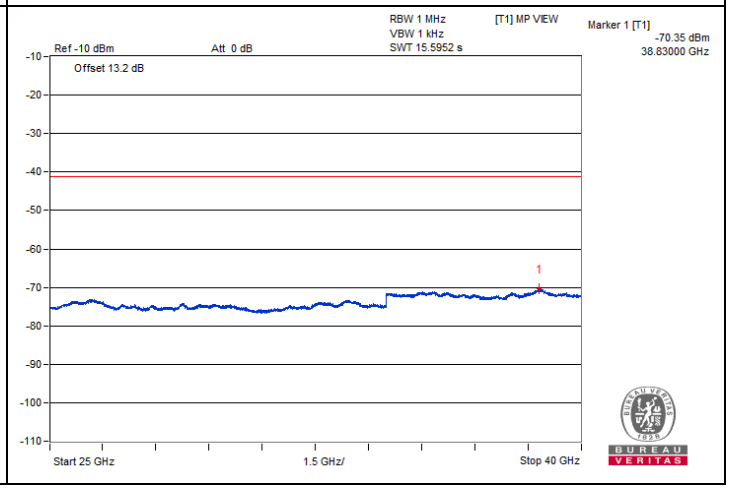

QualCOMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigahertz.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5122.95	60.16 PK	74	-13.84	-44.12	-44.85	6.36	-35.10
2	5147.77	47.85 AV	54	-6.15	-56.78	-56.79	6.36	-47.41

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

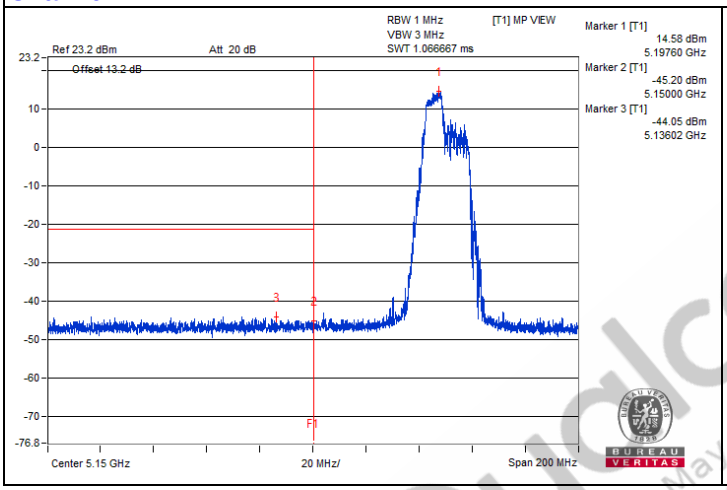

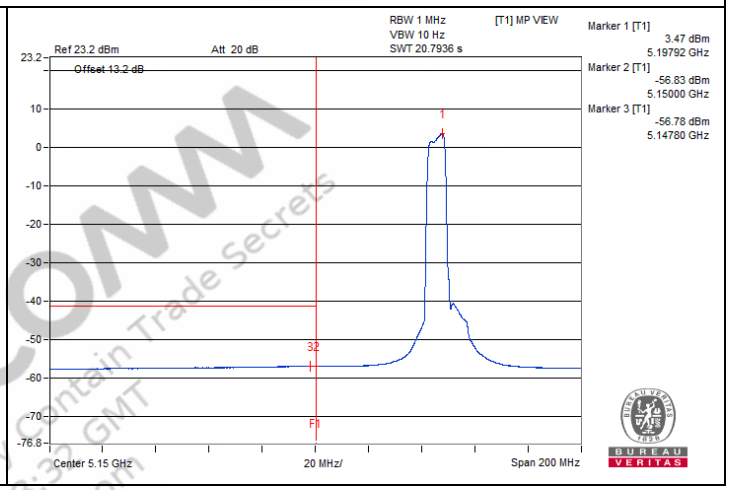

Chain 1

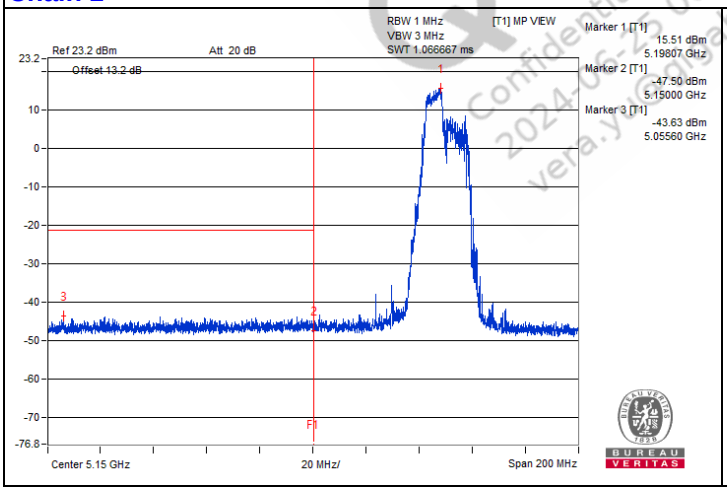

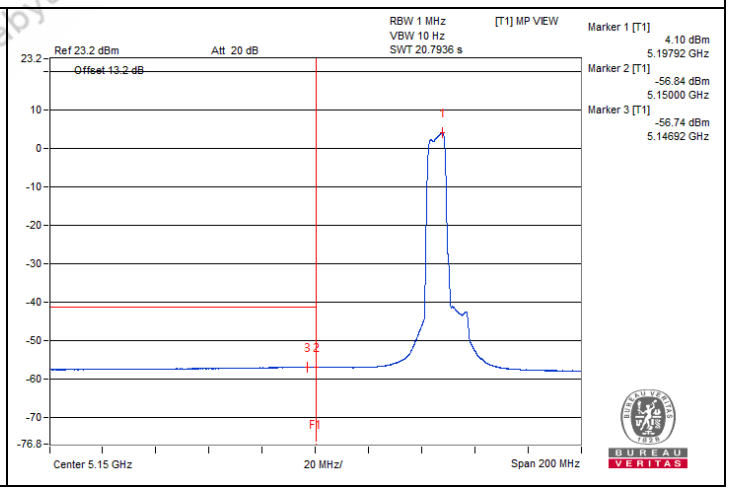

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@cybyte.com

802.11be (EHT20) 52+26-tone RU - Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3559.37	58.08 PK	74	-15.92	-47.37	-49.65	8.17	-37.18
2	3557.81	47.13 AV	54	-6.87	-59.26	-59.37	8.17	-48.13
3	#7106.25	59.31 PK	68.2	-8.89	-47.57	-46.74	8.17	-35.95
4	10623.43	59.59 PK	74	-14.41	-47.61	-46.21	8.17	-35.67
5	10629.68	48.83 AV	54	-5.17	-57.36	-57.88	8.17	-46.43
6	15966.75	49.11 PK	74	-24.89	-58.51	-56.4	8.17	-46.15
7	15979.68	38.83 AV	54	-15.17	-67.62	-67.61	8.17	-56.43


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

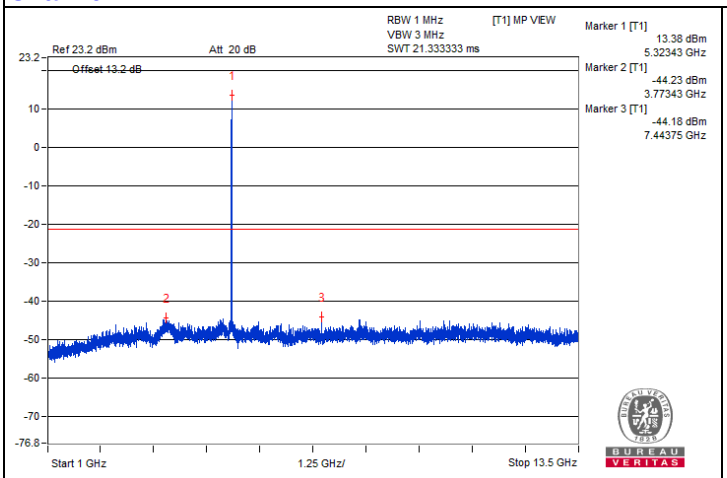


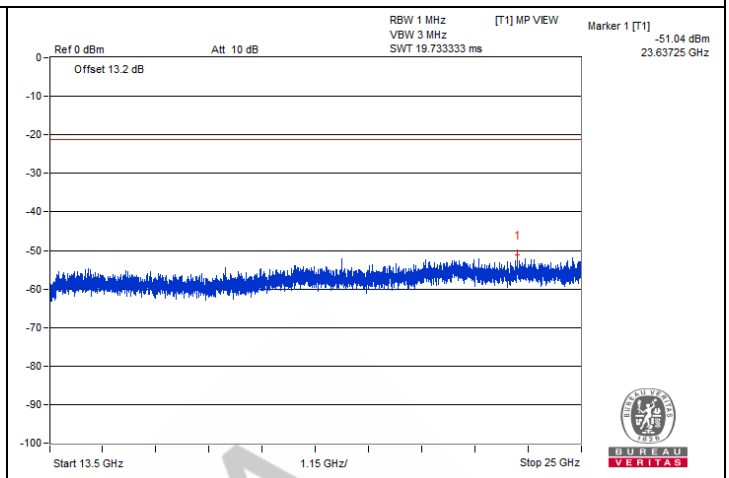

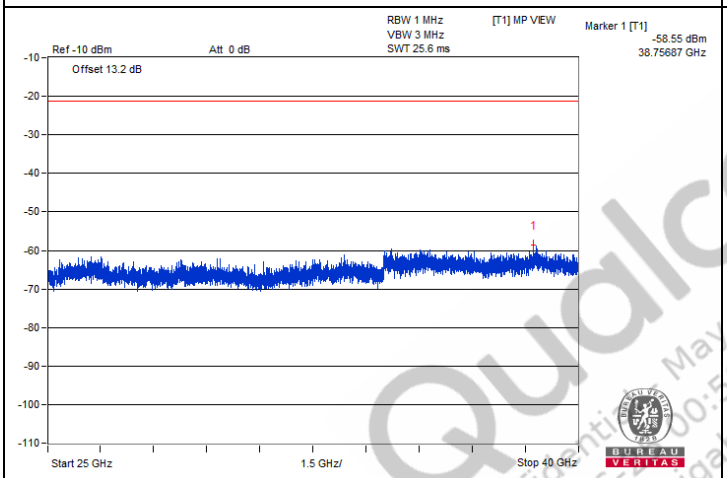

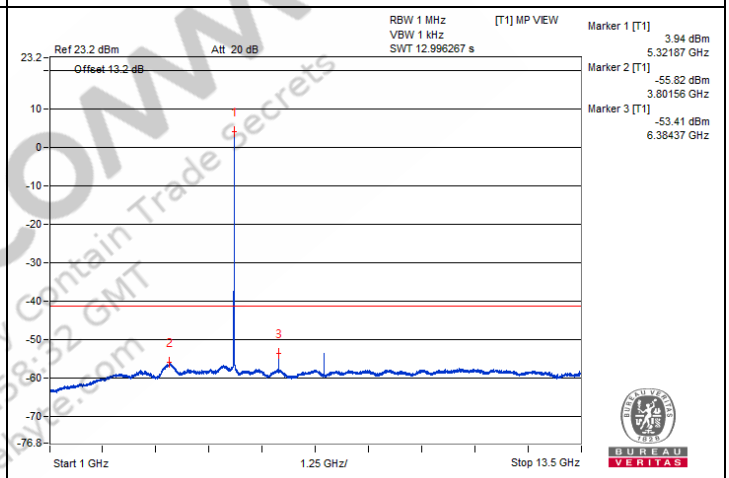


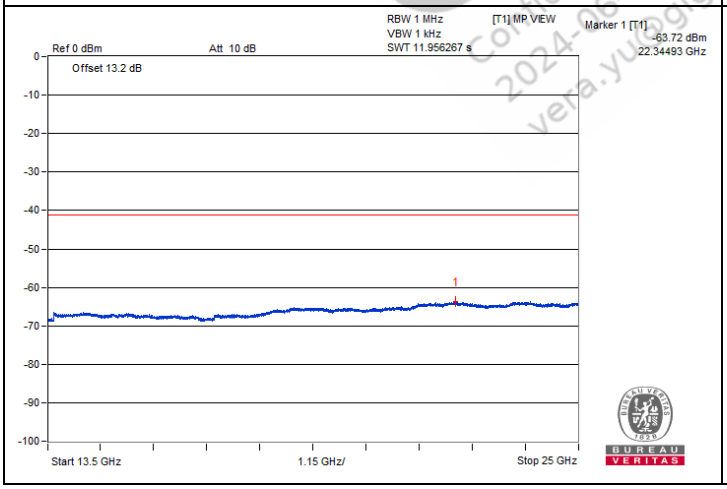


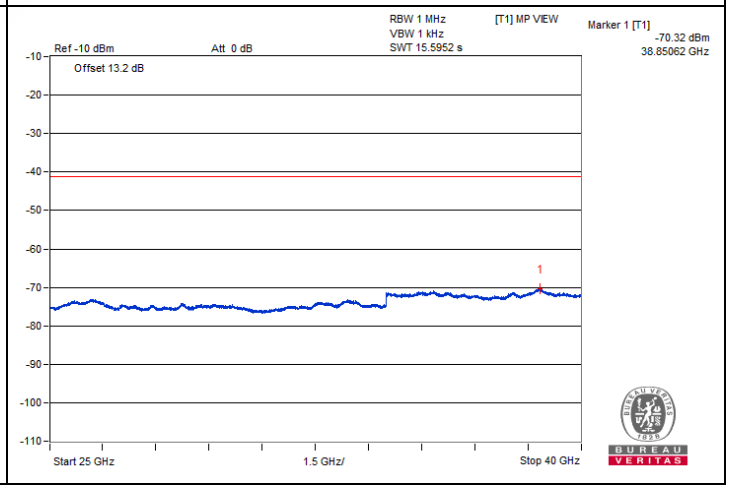



QualCOMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigahive.com


Chain 1

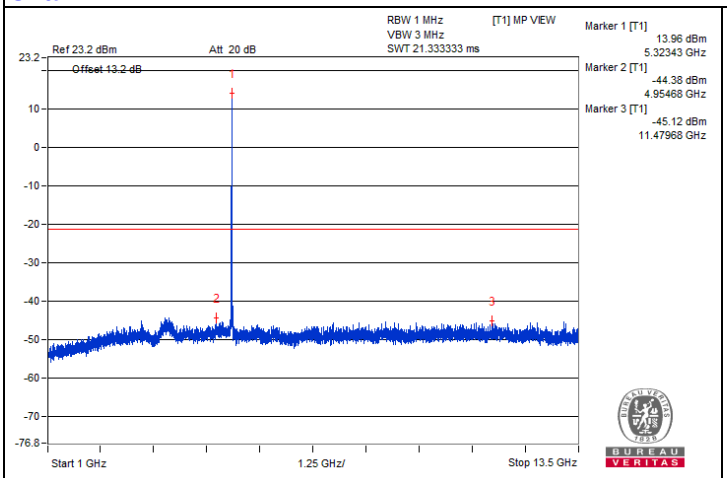


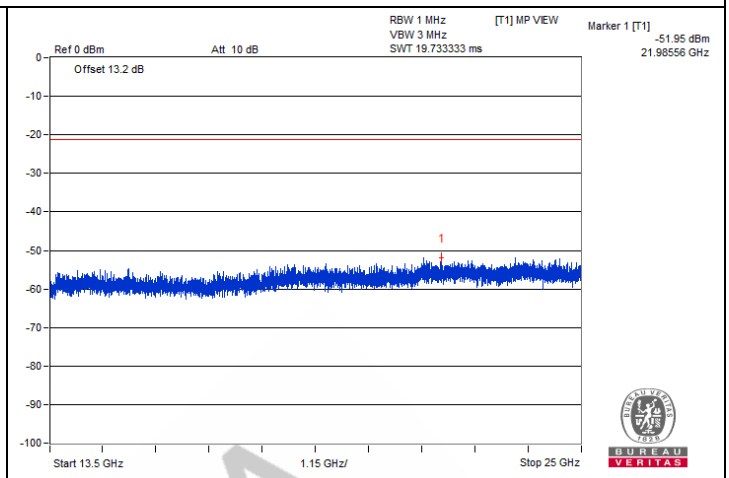

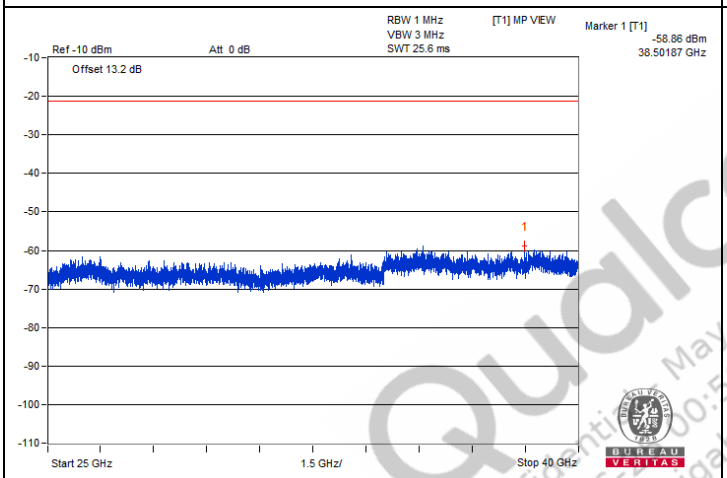

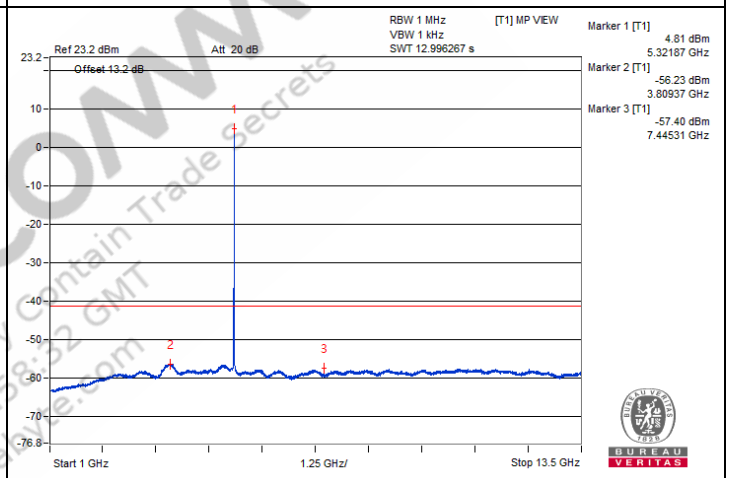

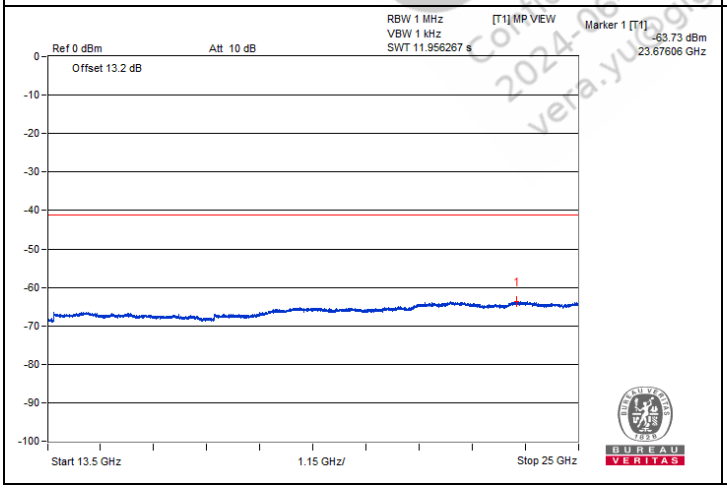

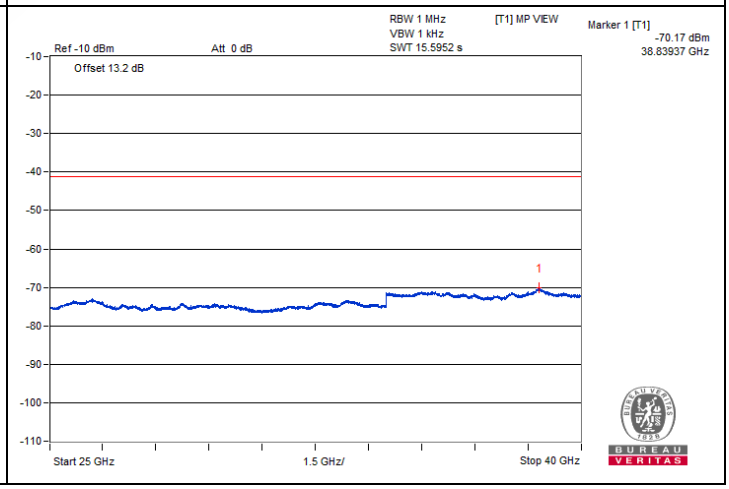

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigahive.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5374.32	59.19 PK	74	-14.81	-44.07	-47.69	6.43	-36.07
2	5350.57	46.74 AV	54	-7.26	-57.75	-58.19	6.43	-48.52


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

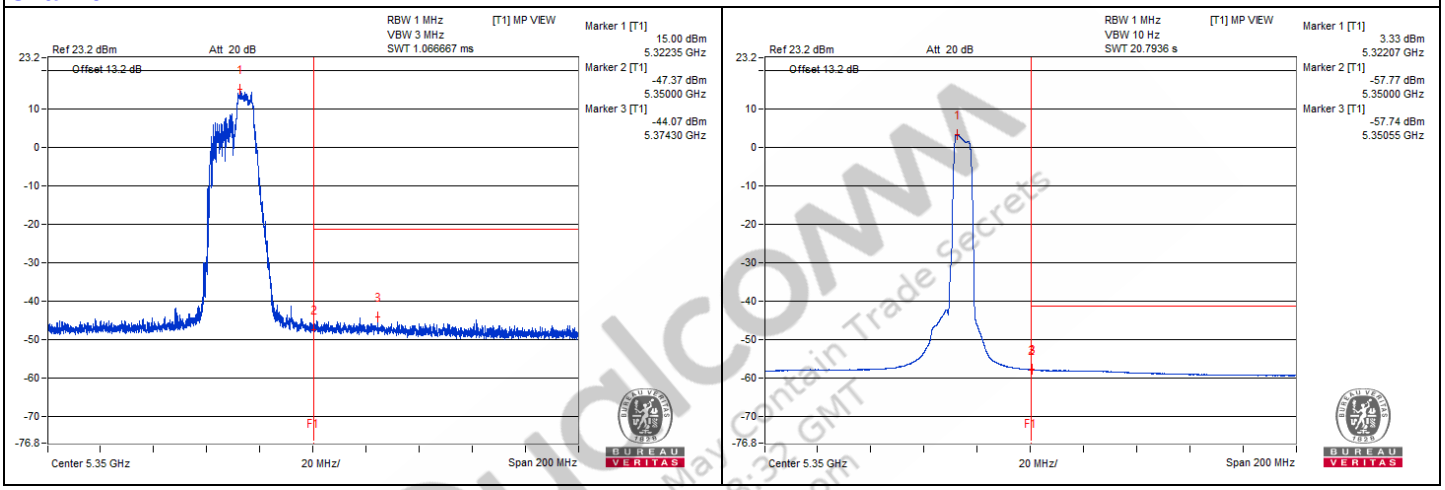

Chain 1

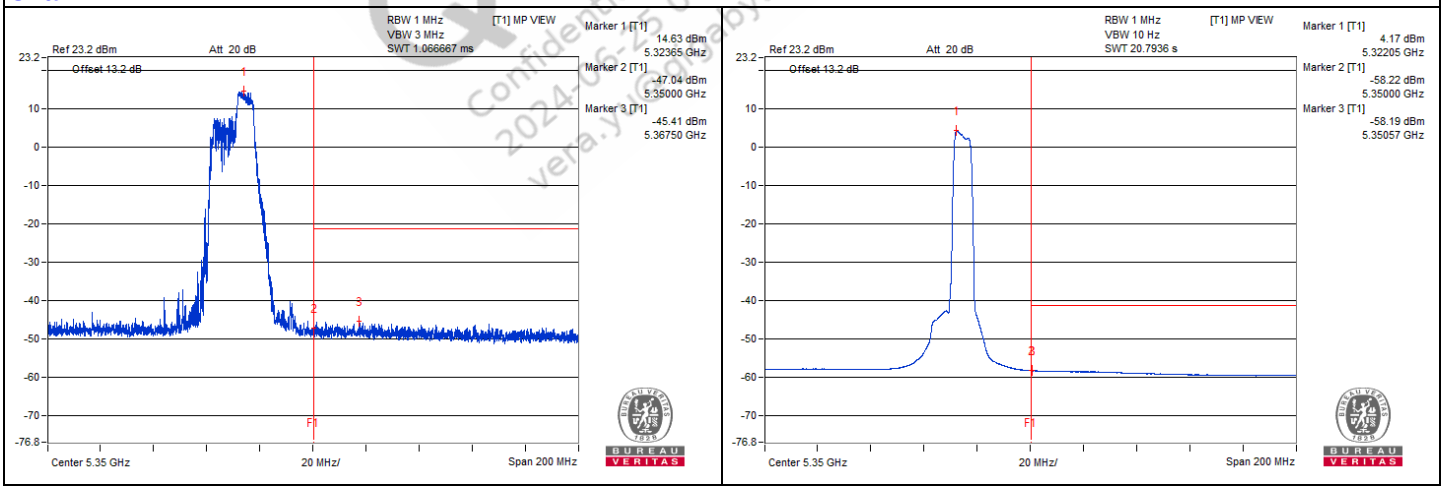

Qualcomm Confidential - May contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@cybyte.com

802.11be (EHT20) 52+26-tone RU - Channel 165

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3868.75	59.97 PK	74	-14.03	-46.61	-46.33	8.17	-35.29
2	3864.06	49.86 AV	54	-4.14	-56.33	-56.85	8.17	-45.40
3	#7760.93	59.64 PK	68.2	-8.56	-49.4	-45.19	8.17	-35.62
4	11662.5	59.36 PK	74	-14.64	-46.72	-47.48	8.17	-35.90
5	11645.31	48.28 AV	54	-5.72	-58.22	-58.11	8.17	-46.98
6	#17490.5	49.42 PK	68.2	-18.78	-57.95	-56.25	8.17	-45.84


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

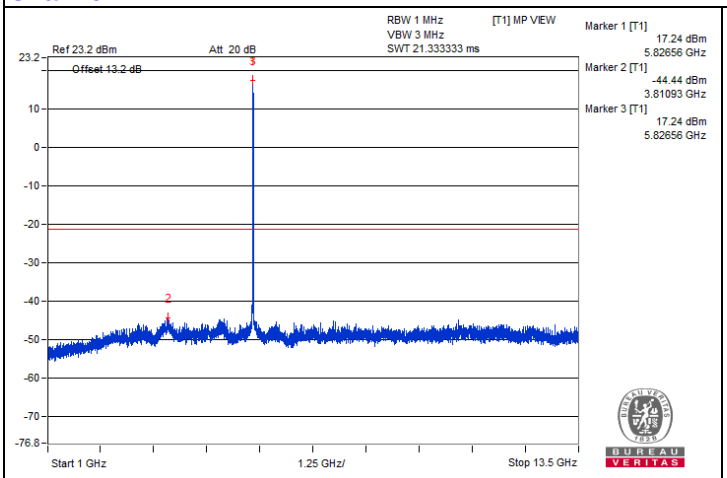


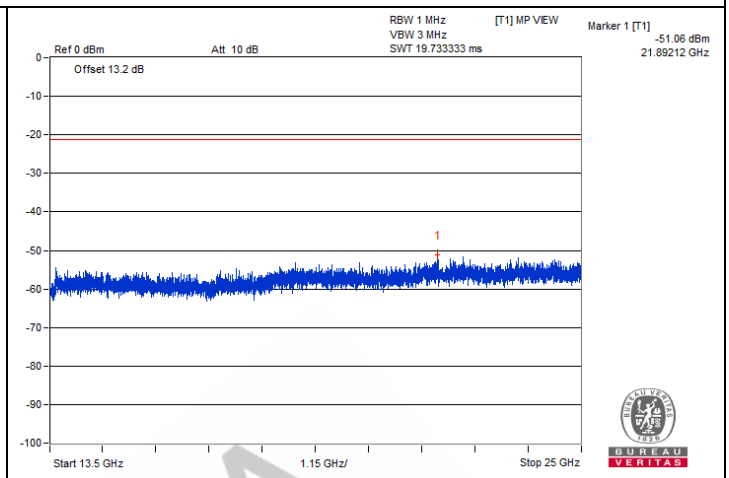

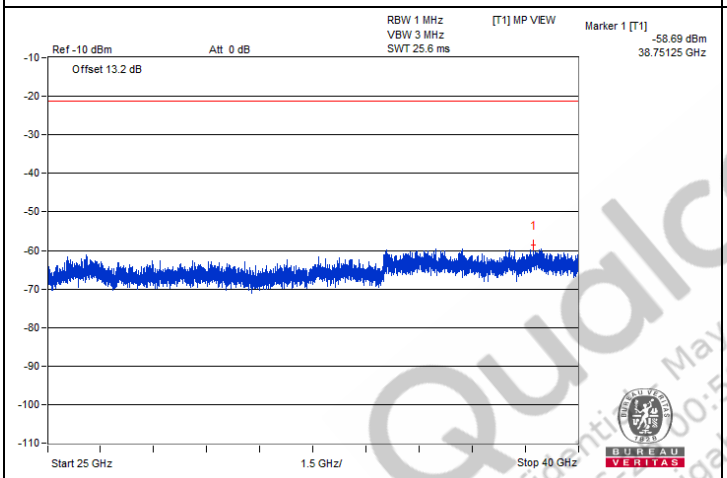

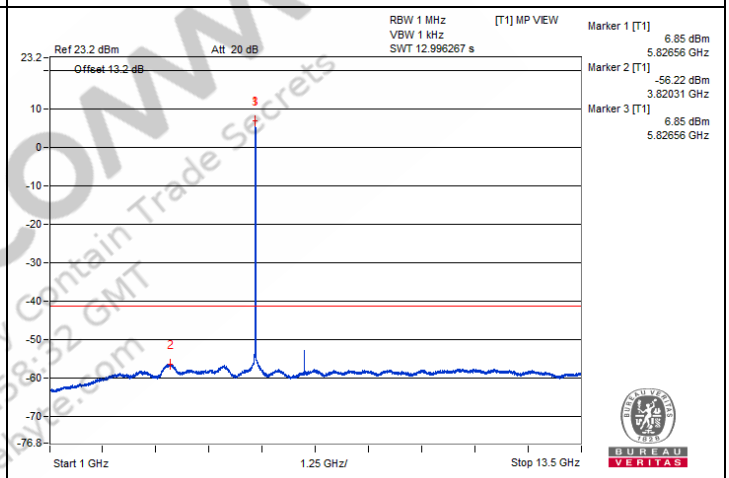


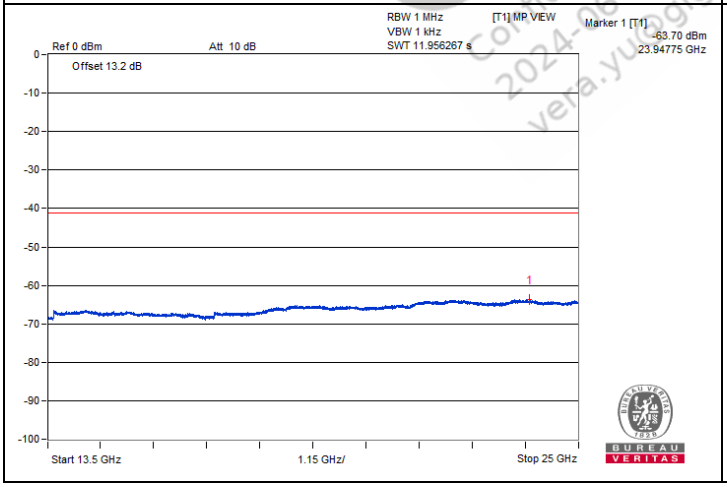


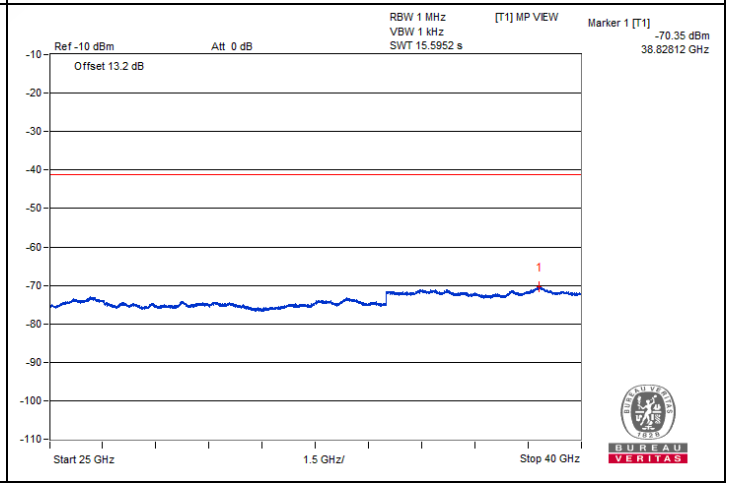



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigahive.com


Chain 1

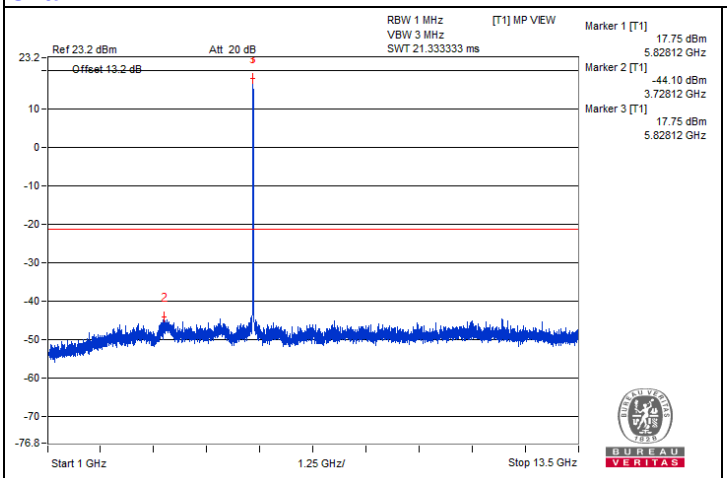


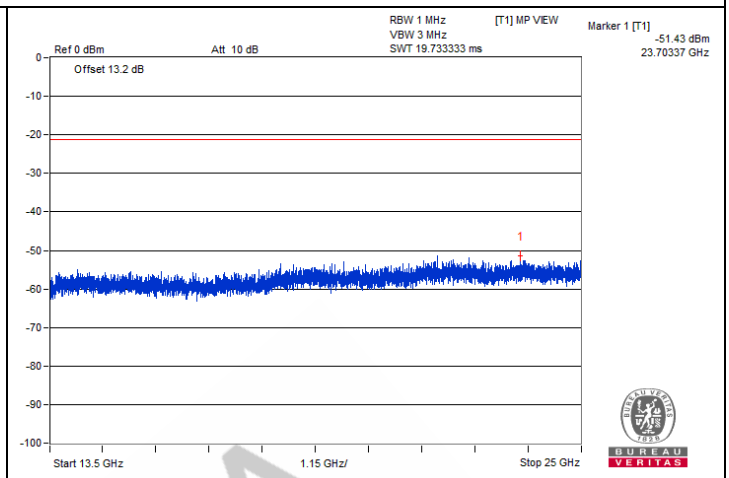

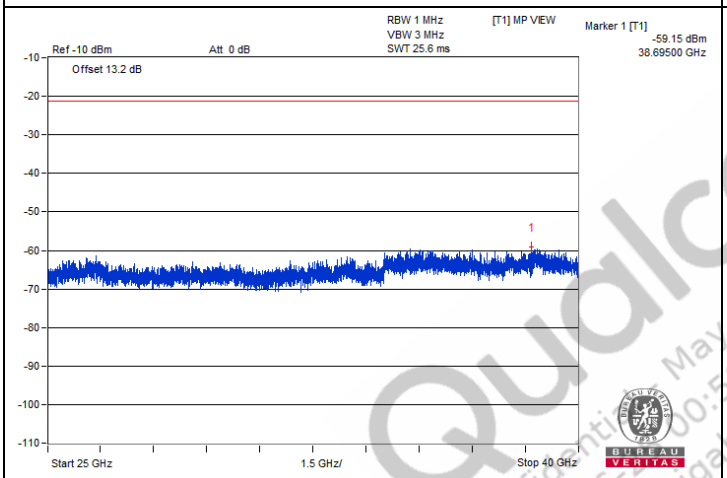

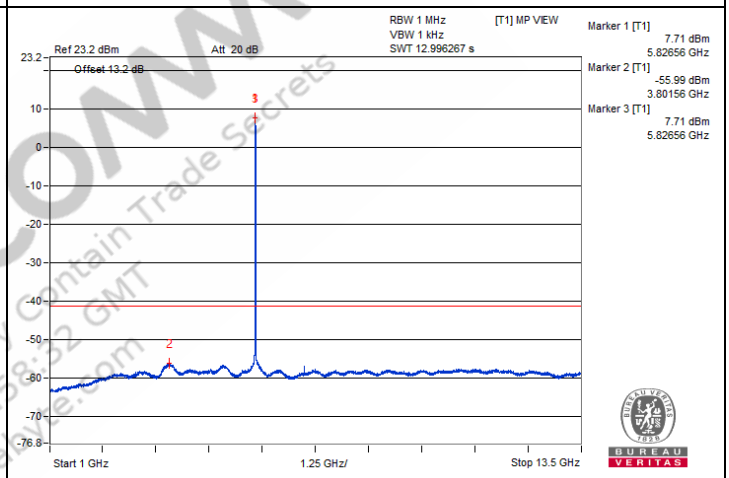

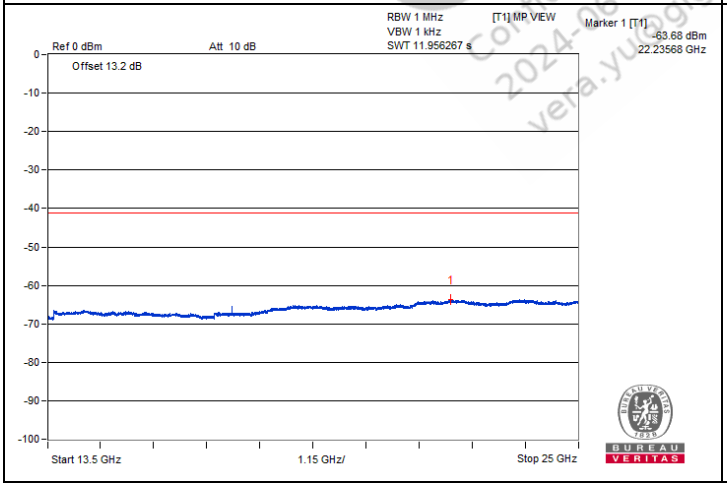


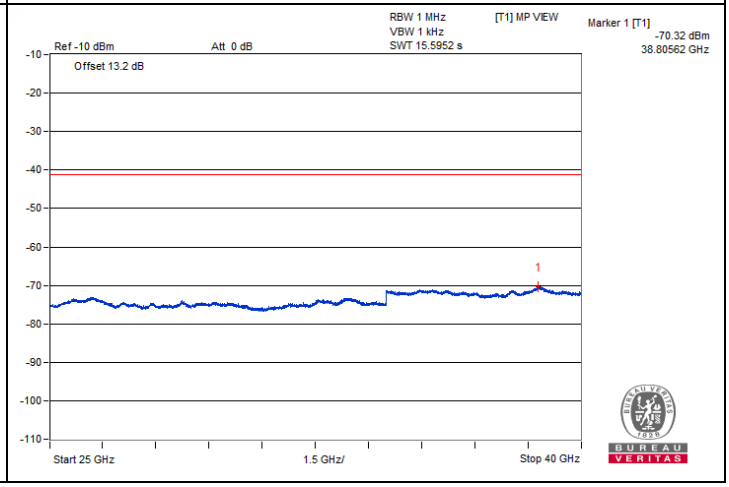

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigahertz.com


Bandedge table

Chain 0

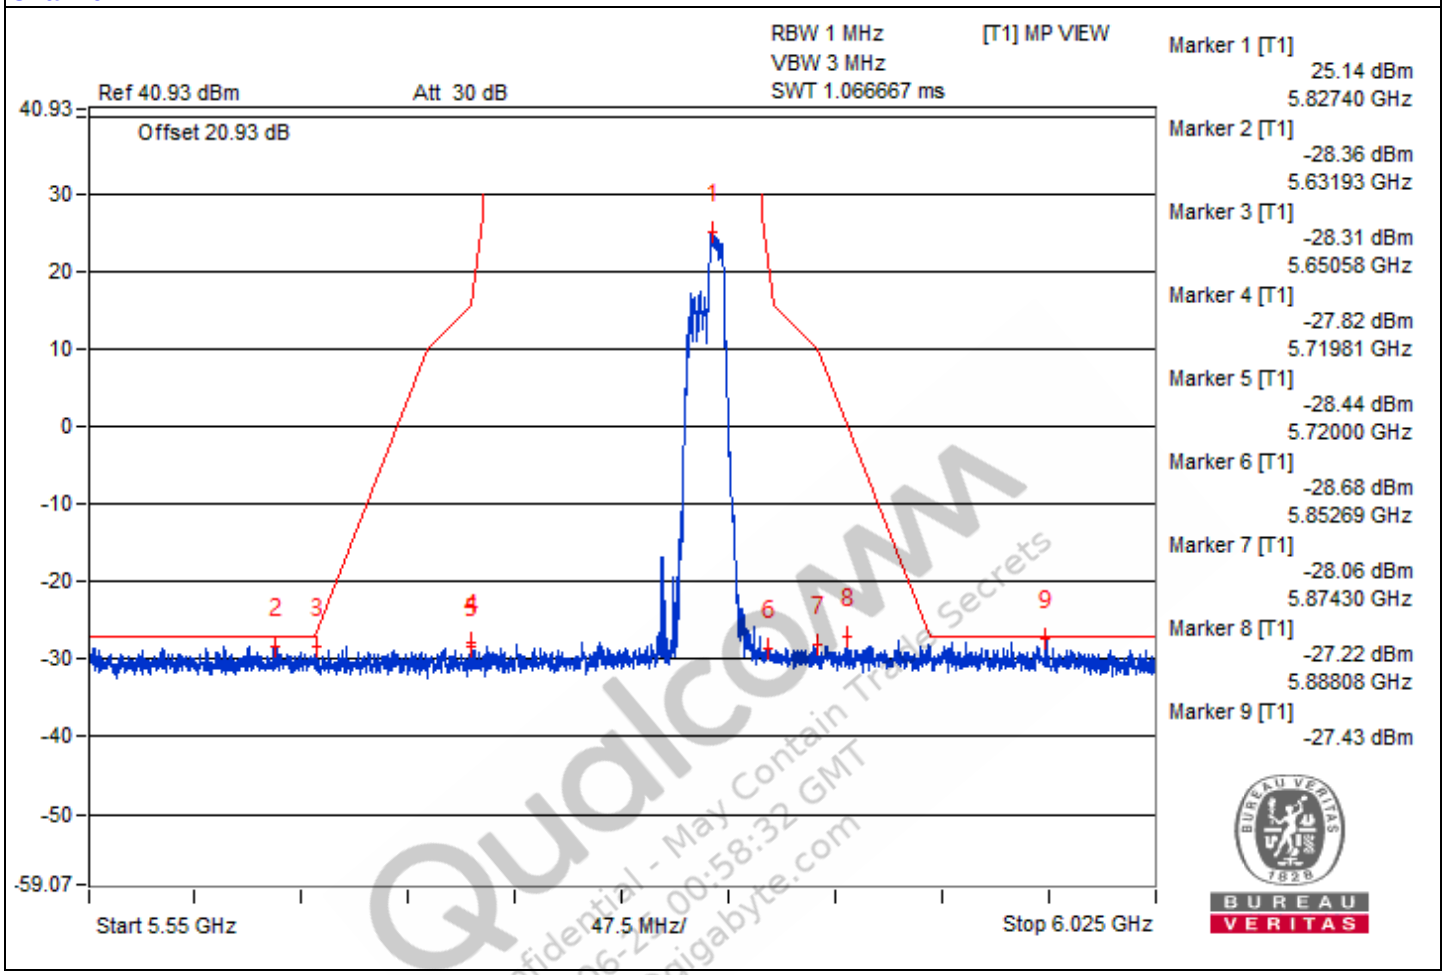

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

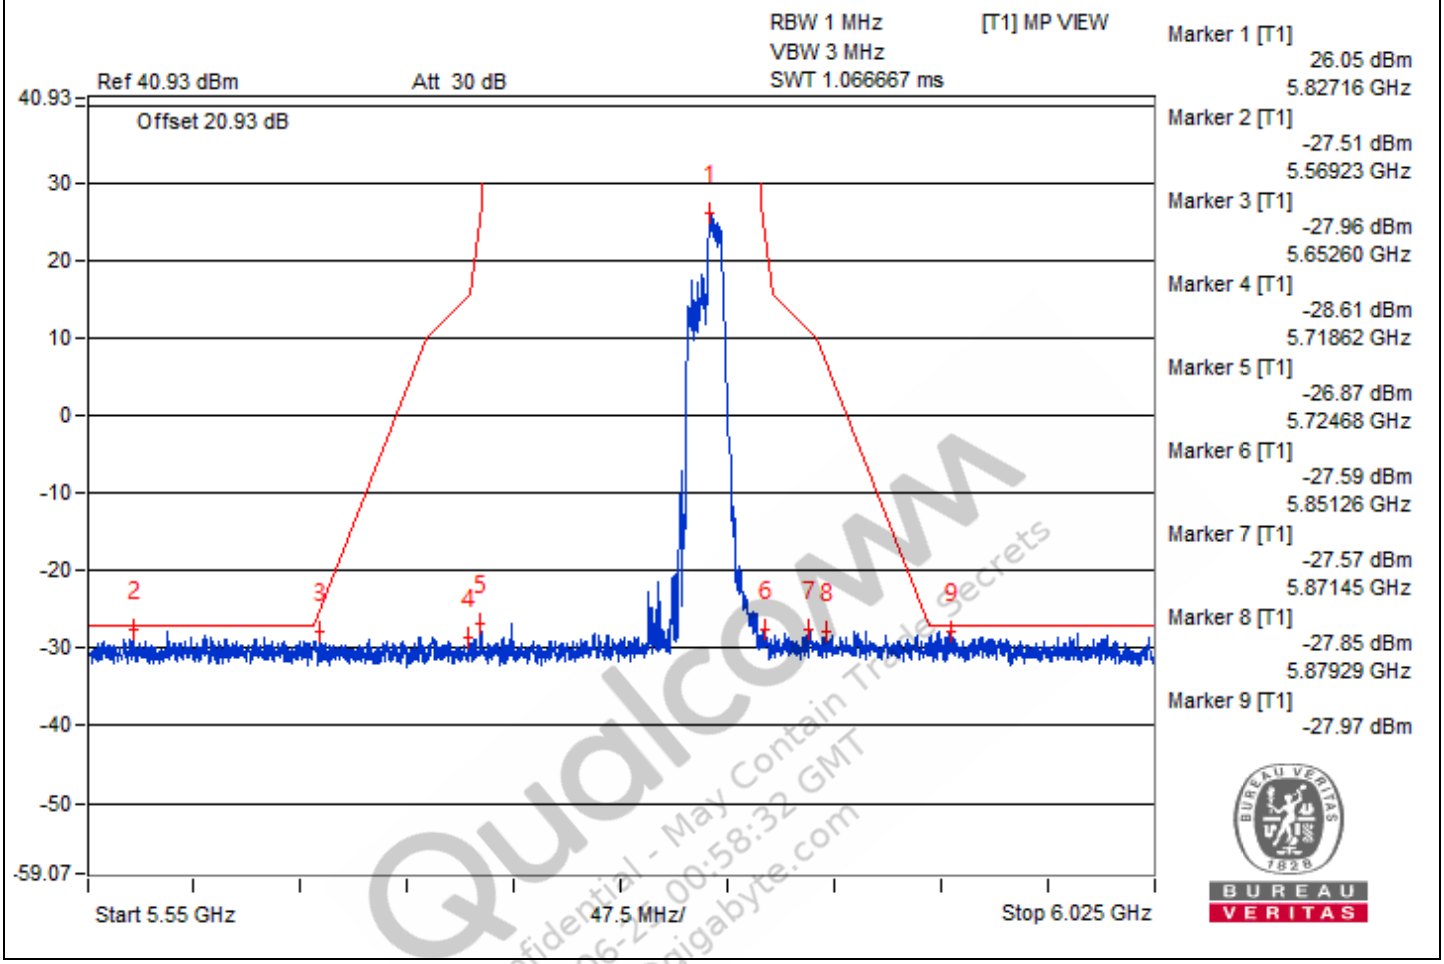

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT20) 106+26-tone RU - Channel 40

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3462.5	57.72 PK	68.2	-10.48	-49.46	-48.08	8.17	-37.54
2	#6951.56	59.14 PK	68.2	-9.06	-46.14	-48.89	8.17	-36.12
3	#10395.31	59.21 PK	68.2	-8.99	-46.36	-48.31	8.17	-36.05
4	15618.87	49.07 PK	74	-24.93	-57.59	-57.16	8.17	-46.19
5	15593	39.53 AV	54	-14.47	-67.15	-66.69	8.17	-55.73


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

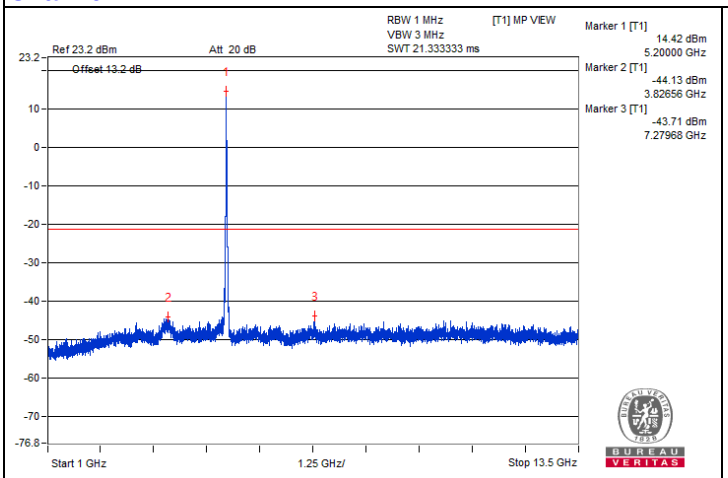


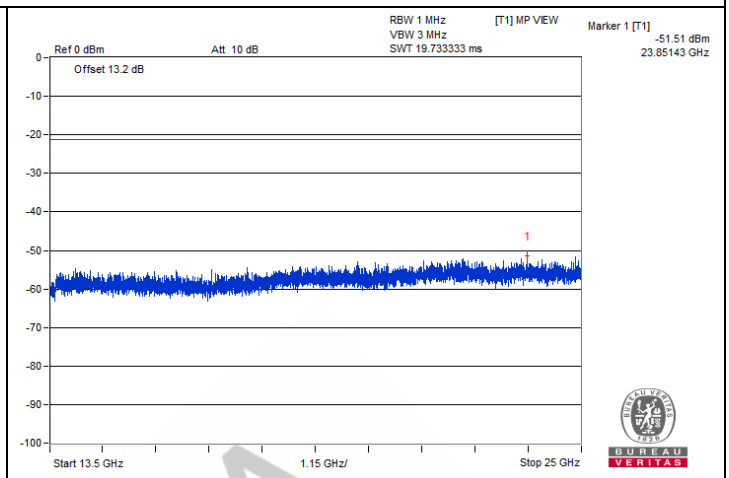

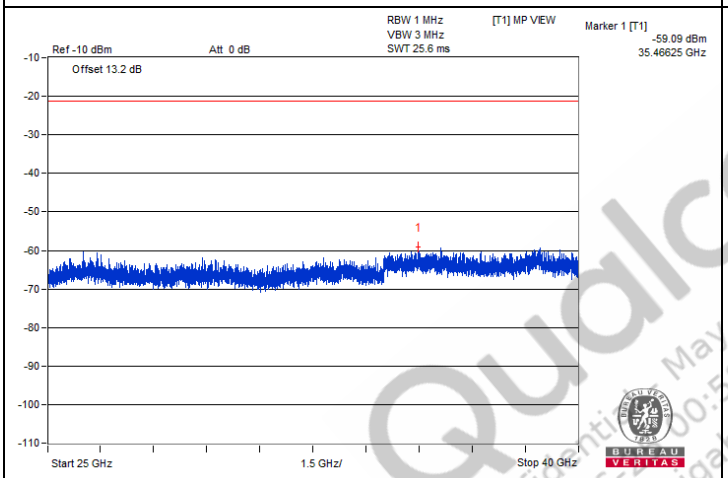

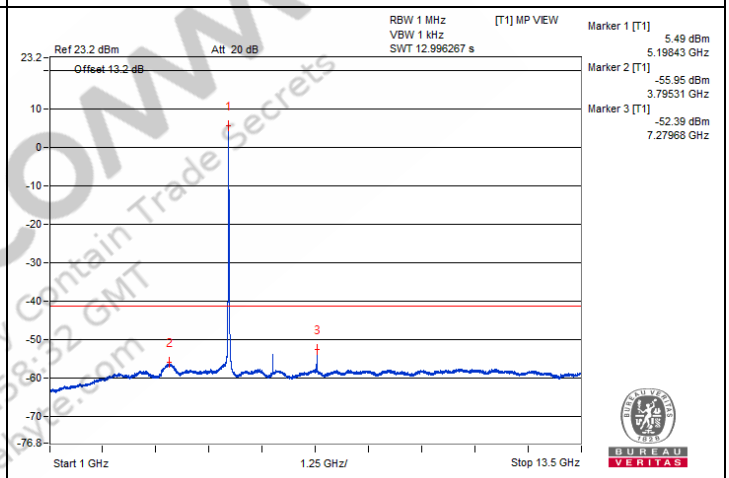


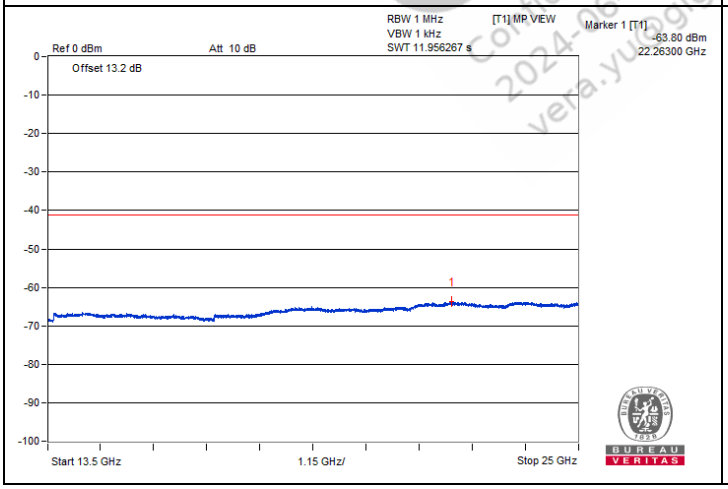


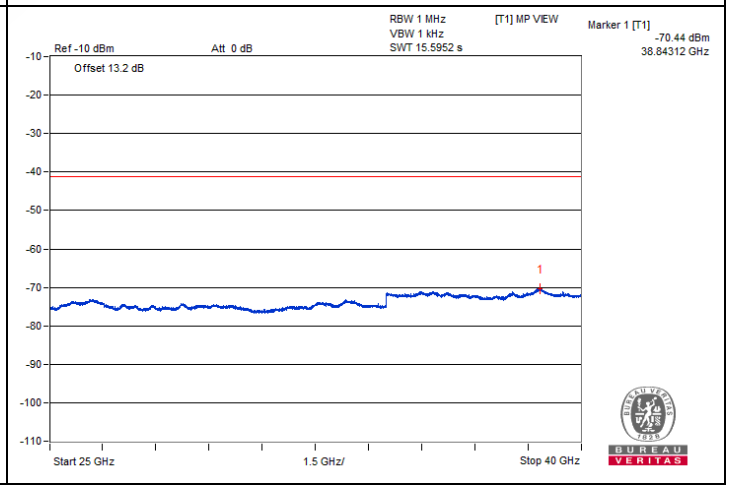



QualCOMM
Confidential - May Contain Trade Secrets
2024-06-21 00:58:32 GMT
vera.yu@gigahive.com


Chain 1

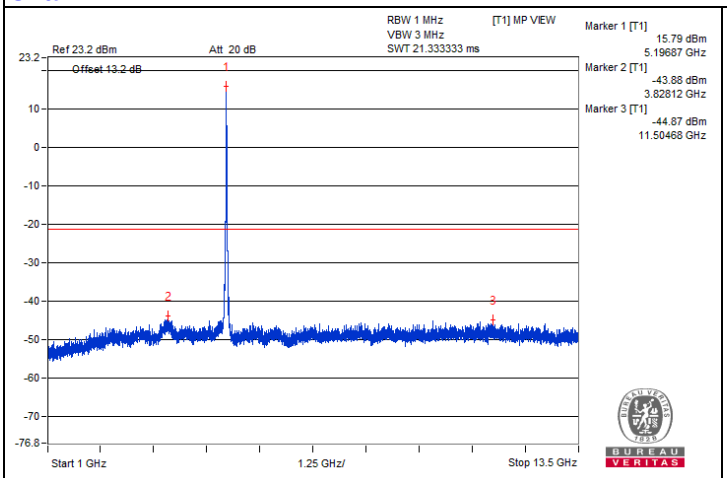


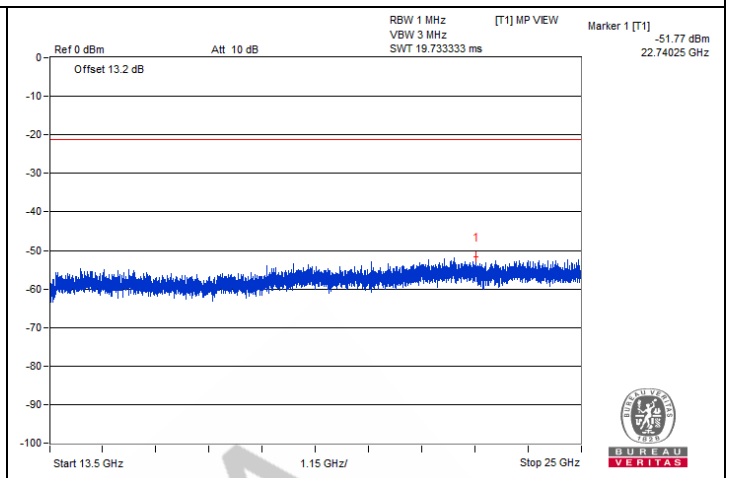

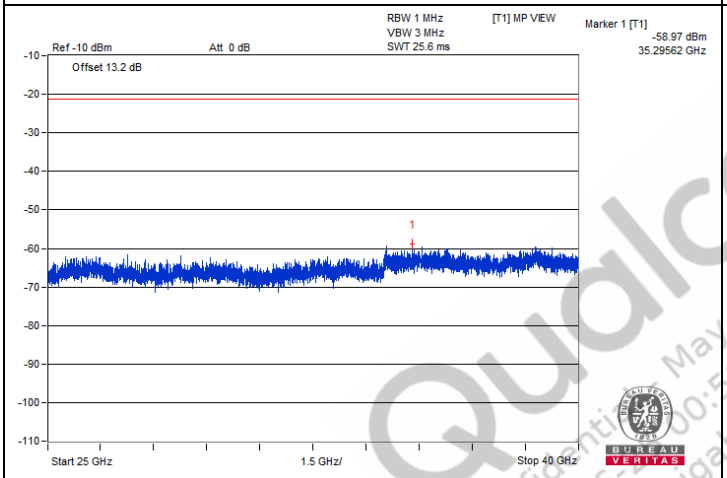

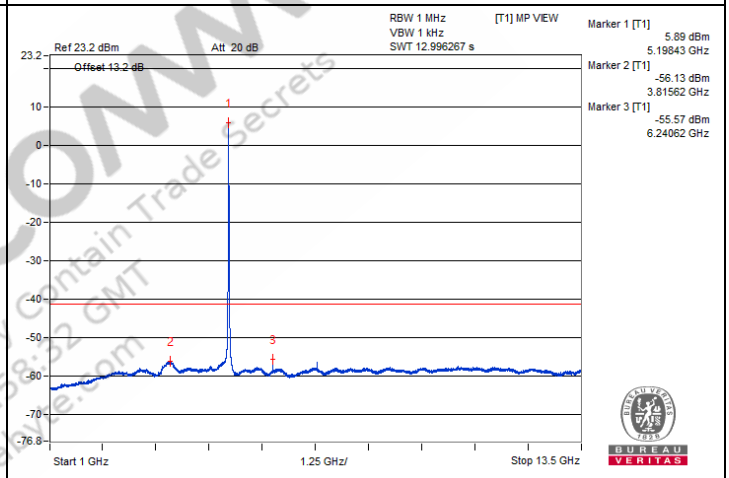

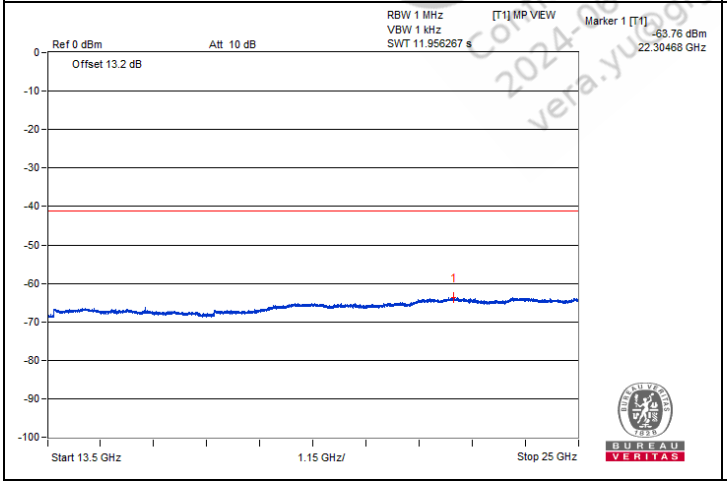

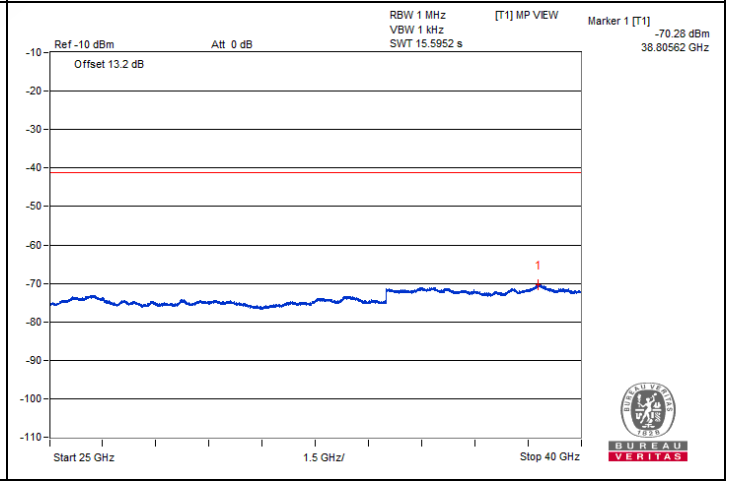

QualcOMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigahive.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5148.32	68.82 PK	74	-5.18	-42.02	-33.35	6.36	-26.44
2	5149.87	49.34 AV	54	-4.66	-55.63	-54.98	6.36	-45.92

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

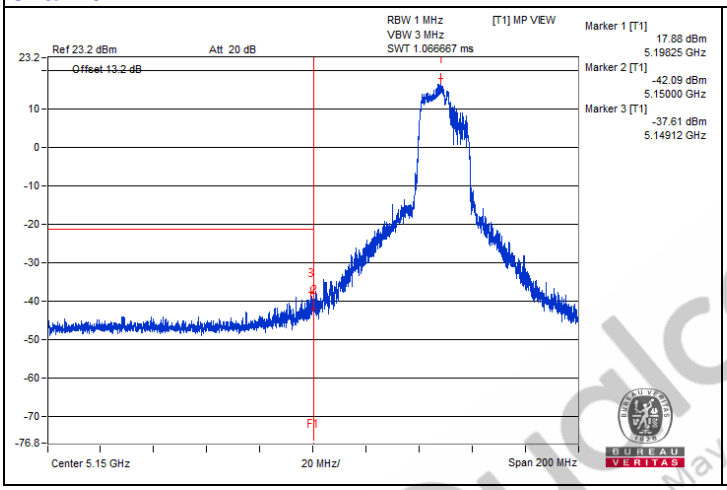

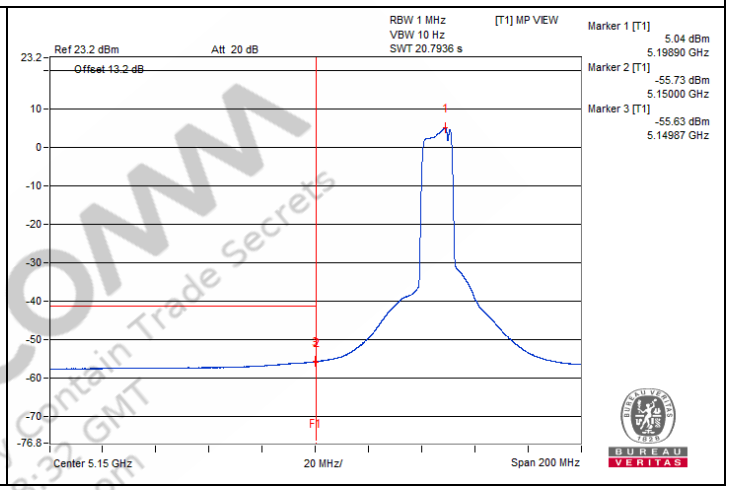

Chain 1

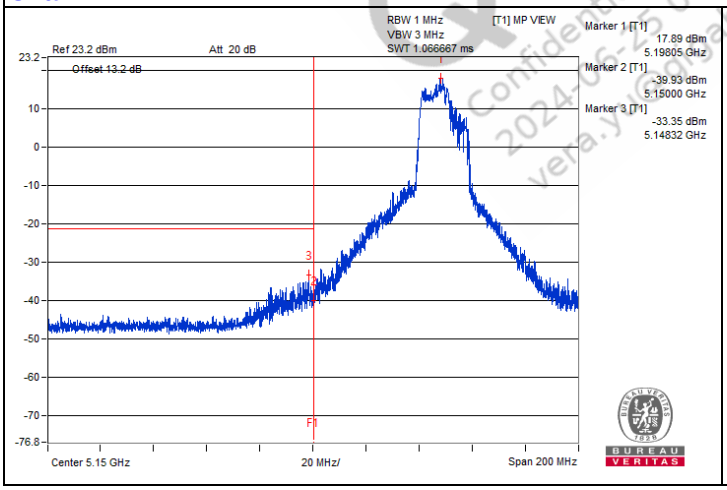

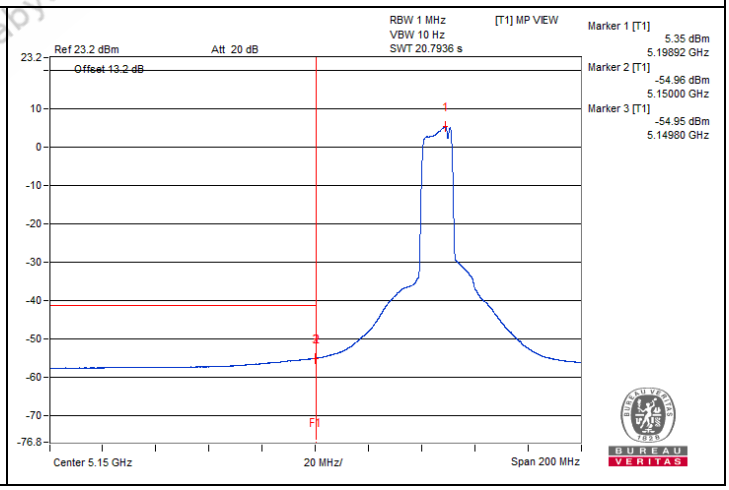

Qualcomm Confidential - May contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@cybyte.com

802.11be (EHT20) 106+26-tone RU - Channel 64

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3559.37	58.08 PK	74	-15.92	-47.37	-49.65	8.17	-37.18
2	3557.81	47.13 AV	54	-6.87	-59.26	-59.37	8.17	-48.13
3	#7106.25	59.31 PK	68.2	-8.89	-47.57	-46.74	8.17	-35.95
4	10623.43	59.59 PK	74	-14.41	-47.61	-46.21	8.17	-35.67
5	10629.68	48.83 AV	54	-5.17	-57.36	-57.88	8.17	-46.43
6	15966.75	49.11 PK	74	-24.89	-58.51	-56.4	8.17	-46.15
7	15979.68	38.83 AV	54	-15.17	-67.62	-67.61	8.17	-56.43


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

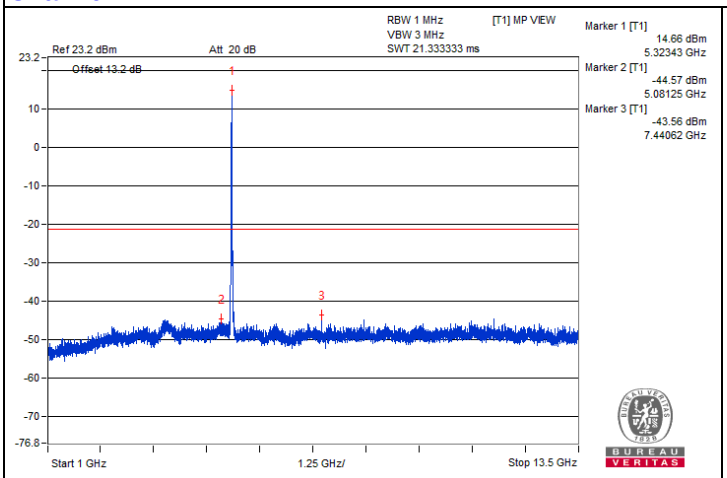


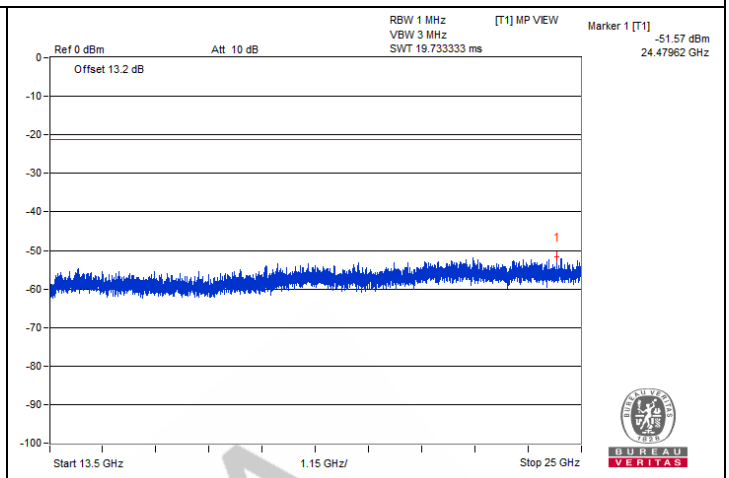

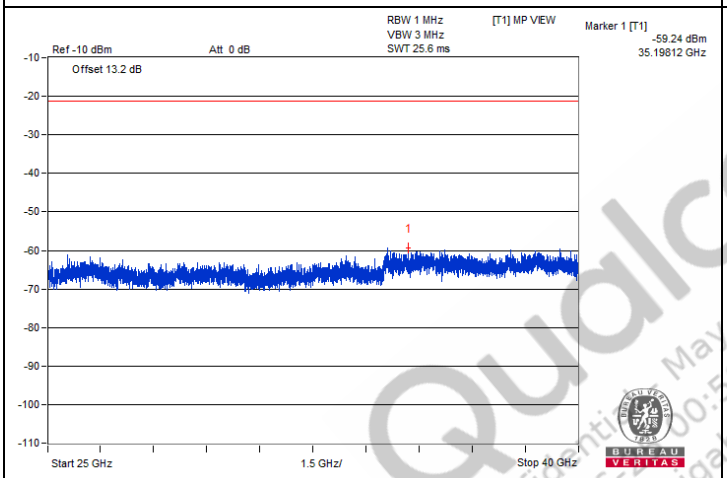

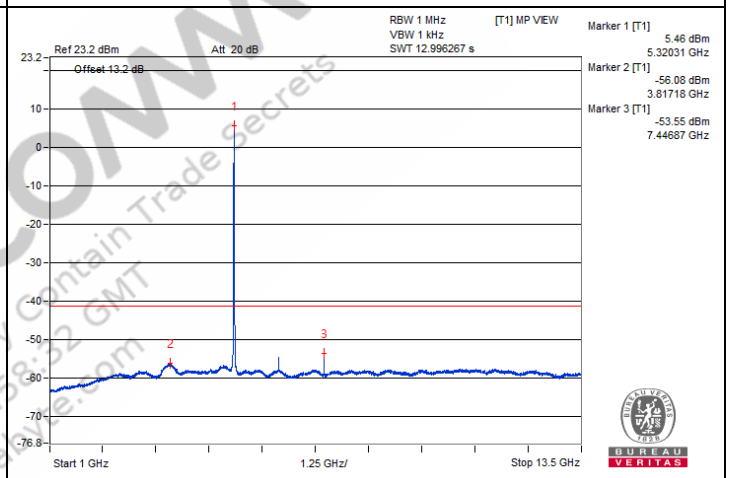


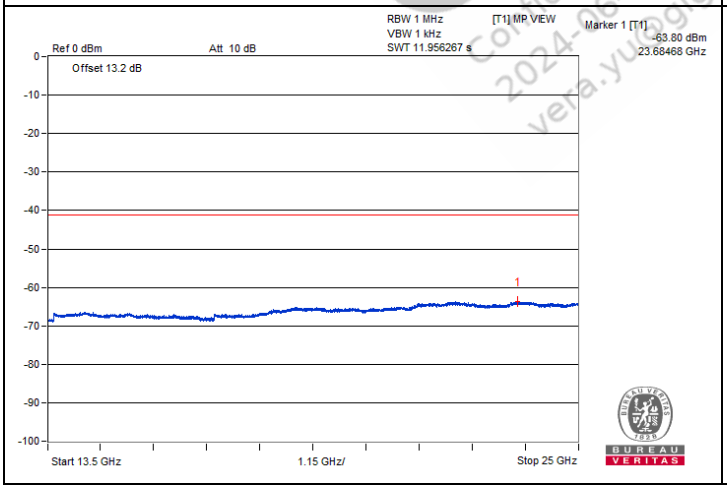


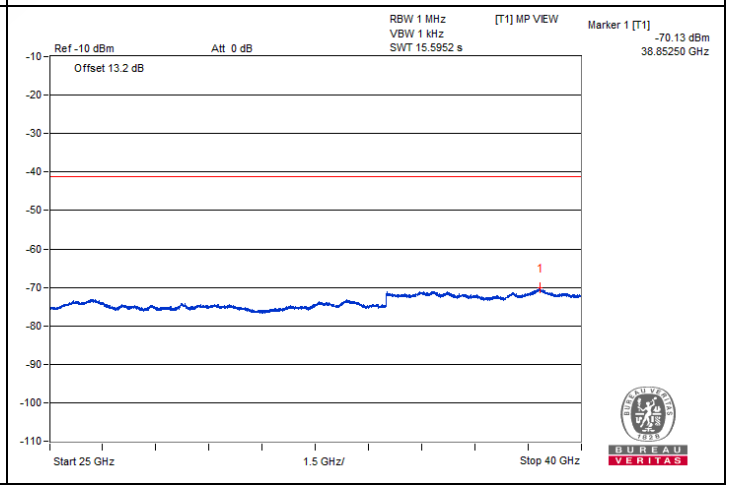



QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigahive.com


Chain 1

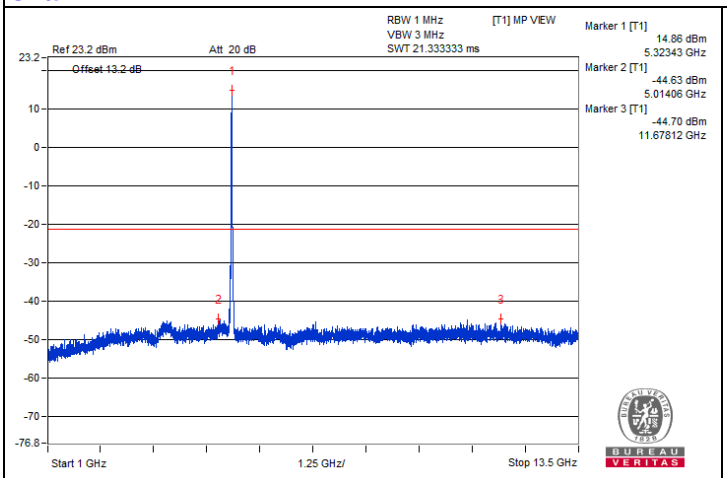


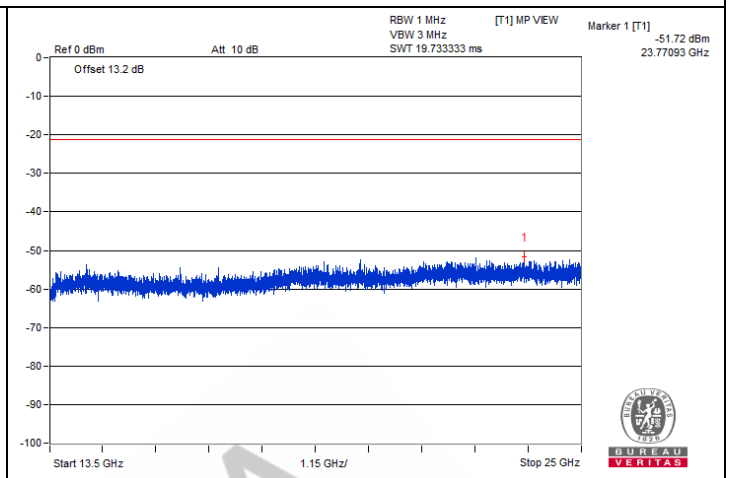

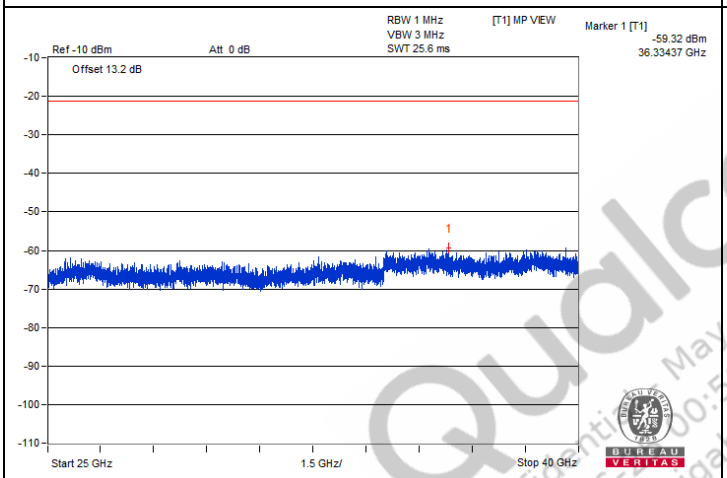

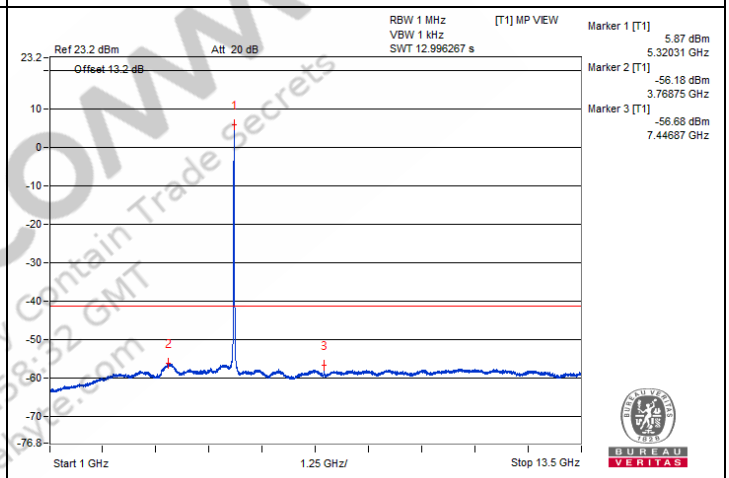

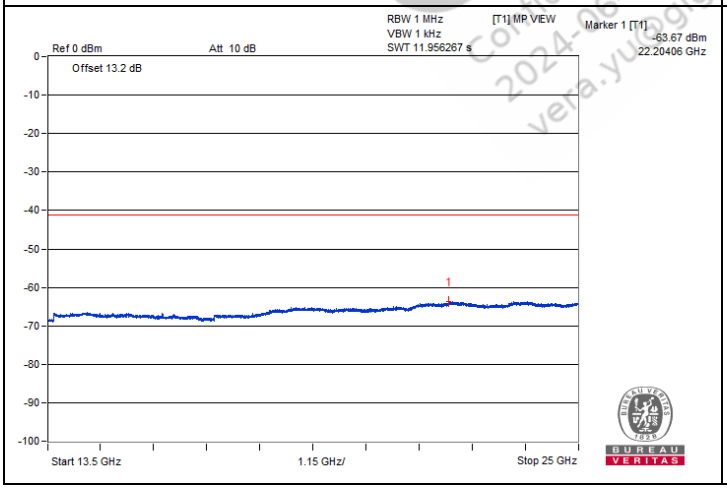

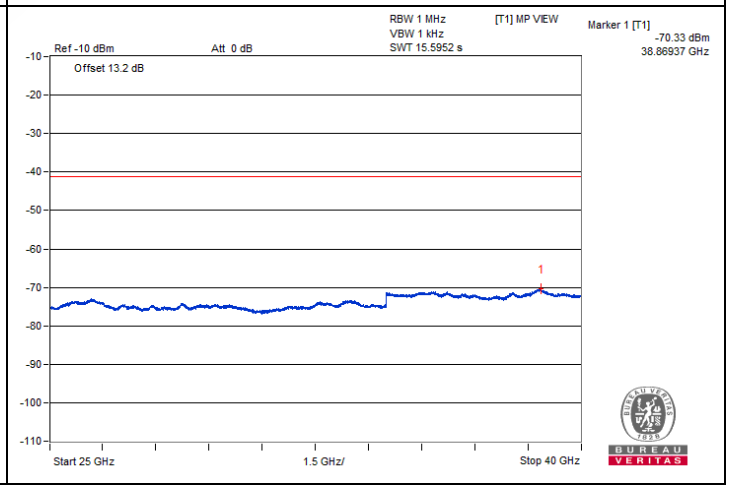

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigahive.com


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.65	71.07 PK	74	-2.93	-40.46	-31.1	6.43	-24.19
2	5350	50.36 AV	54	-3.64	-55.18	-53.63	6.43	-44.90

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

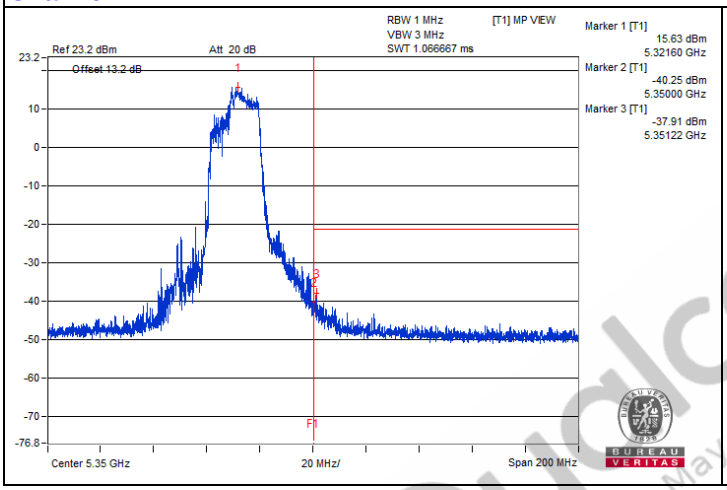

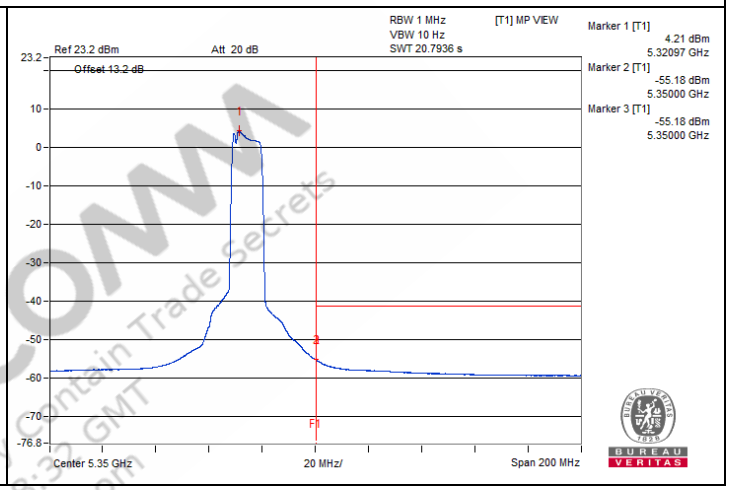

Chain 1

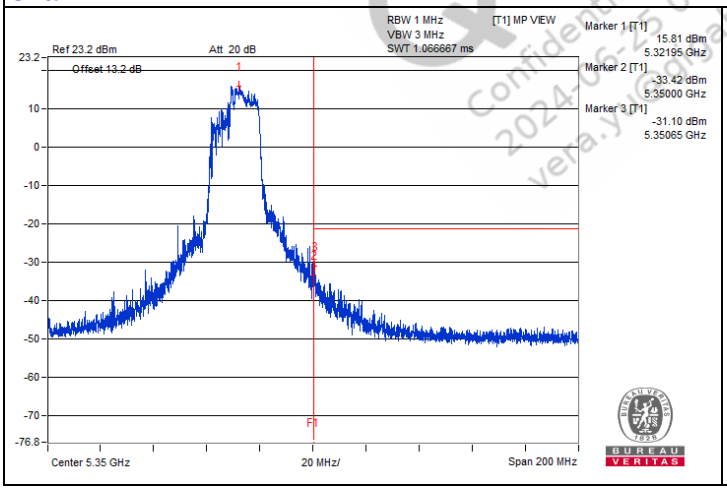

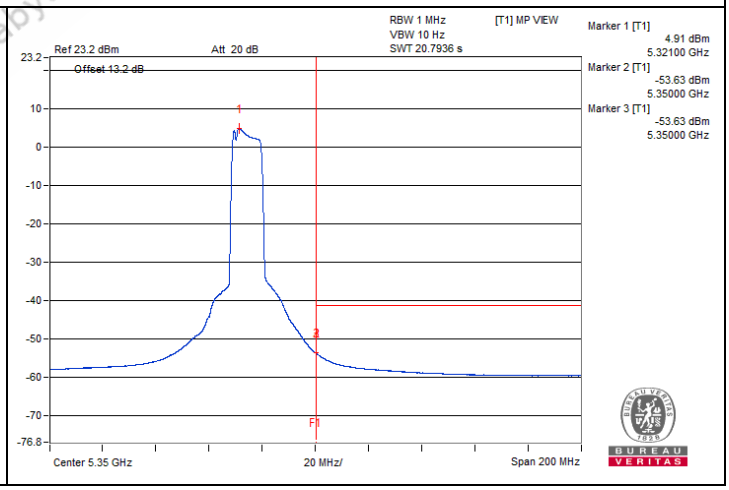

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@cybyte.com

802.11be (EHT20) 106+26-tone RU - Channel 165

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3868.75	59.97 PK	74	-14.03	-46.61	-46.33	8.17	-35.29
2	3864.06	49.86 AV	54	-4.14	-56.33	-56.85	8.17	-45.40
3	#7760.93	59.64 PK	68.2	-8.56	-49.4	-45.19	8.17	-35.62
4	11662.5	59.36 PK	74	-14.64	-46.72	-47.48	8.17	-35.90
5	11645.31	48.28 AV	54	-5.72	-58.22	-58.11	8.17	-46.98
6	#17490.5	49.42 PK	68.2	-18.78	-57.95	-56.25	8.17	-45.84


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

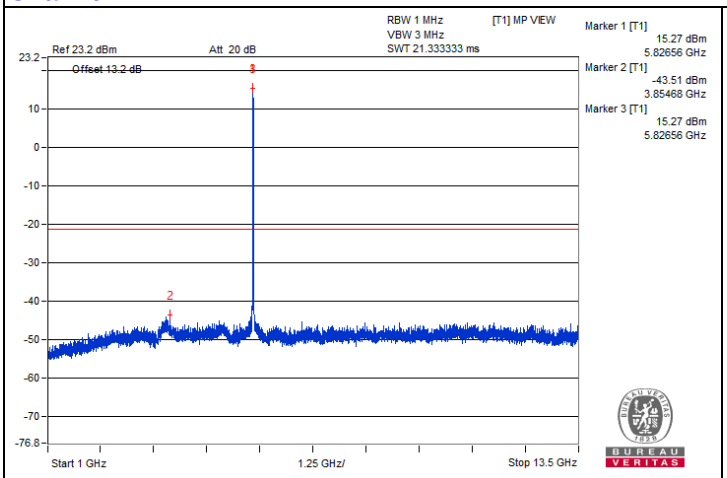


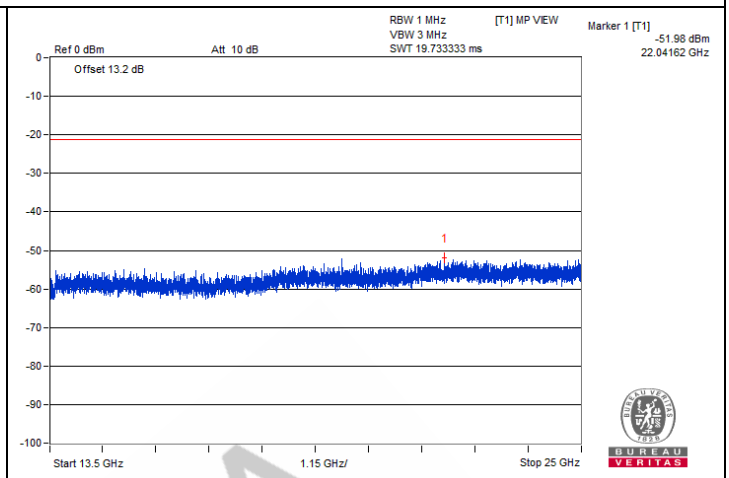

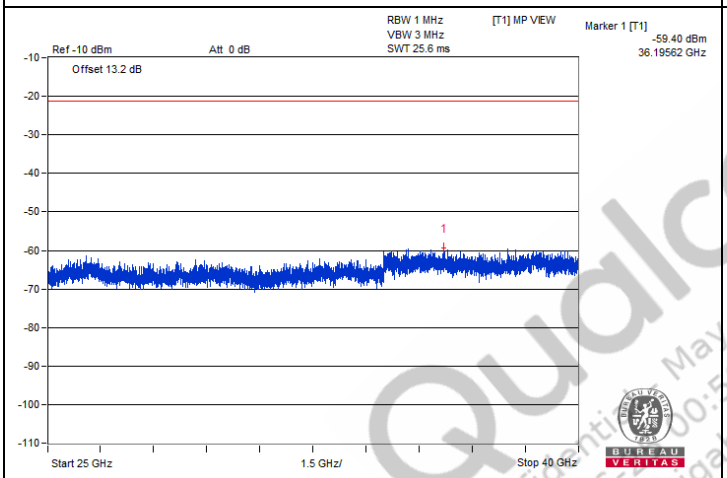

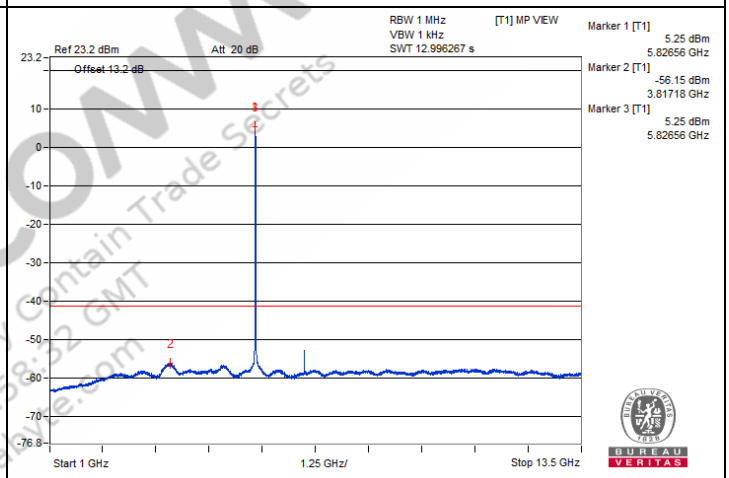


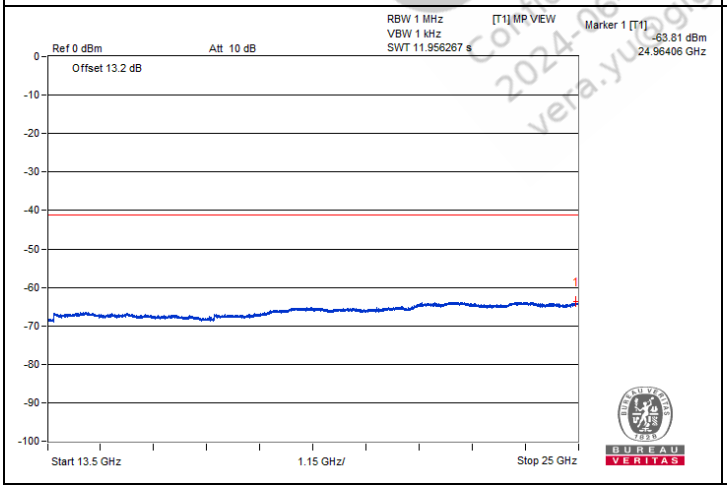


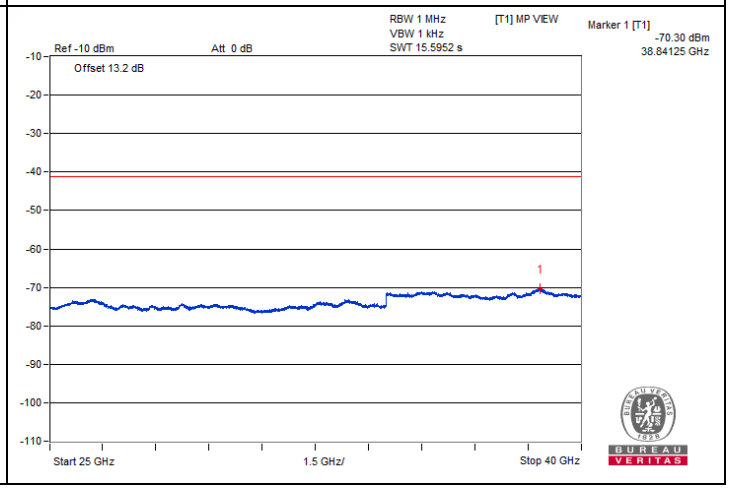



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigahive.com


Chain 1

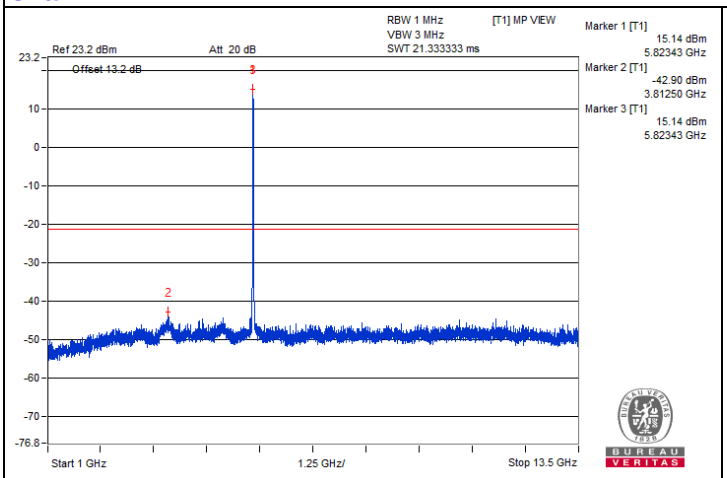


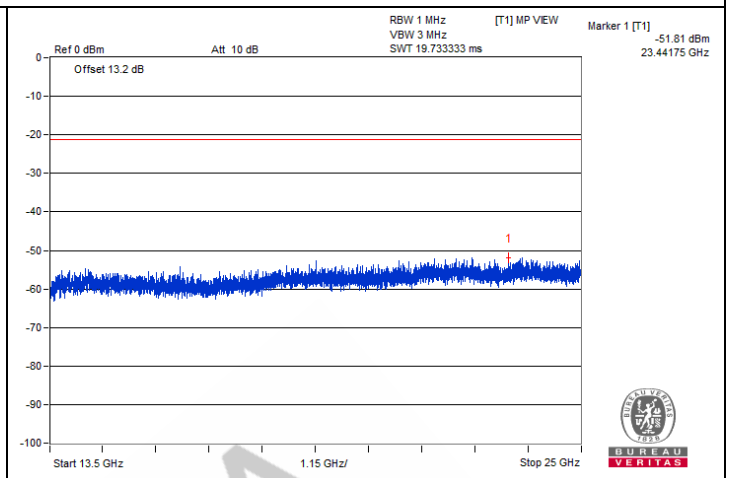

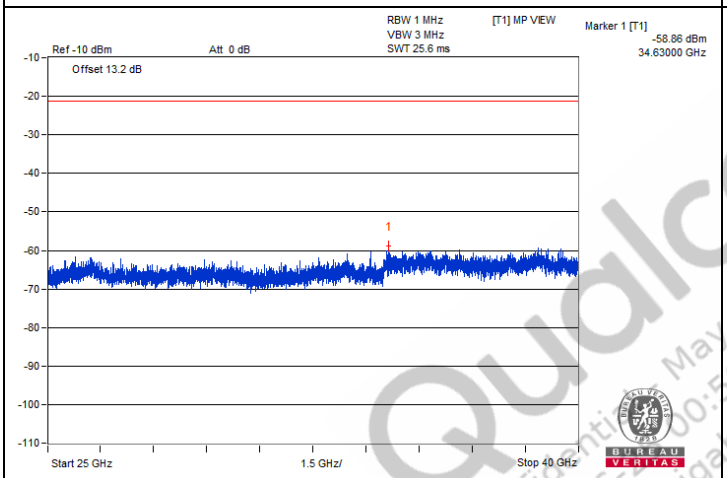

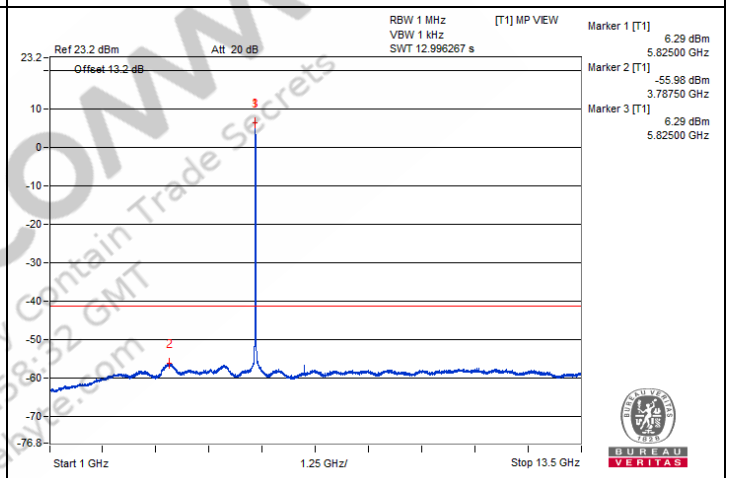

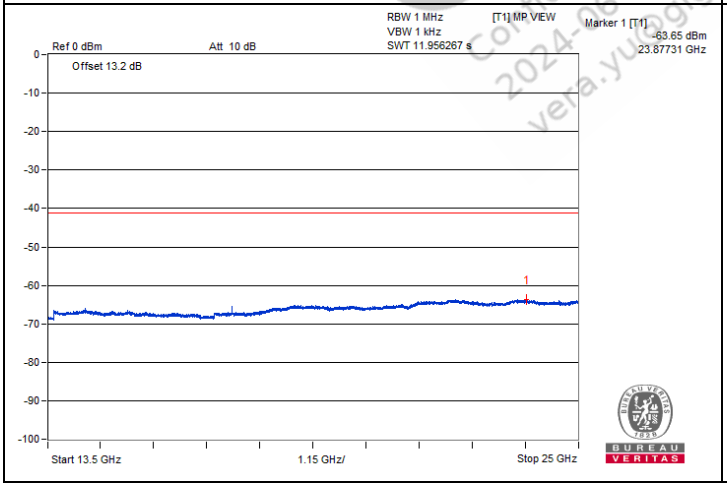


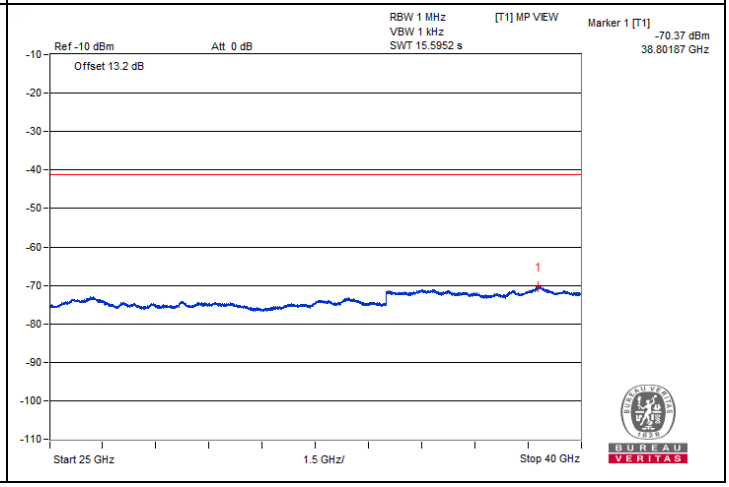

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigahive.com


Bandedge table

Chain 0

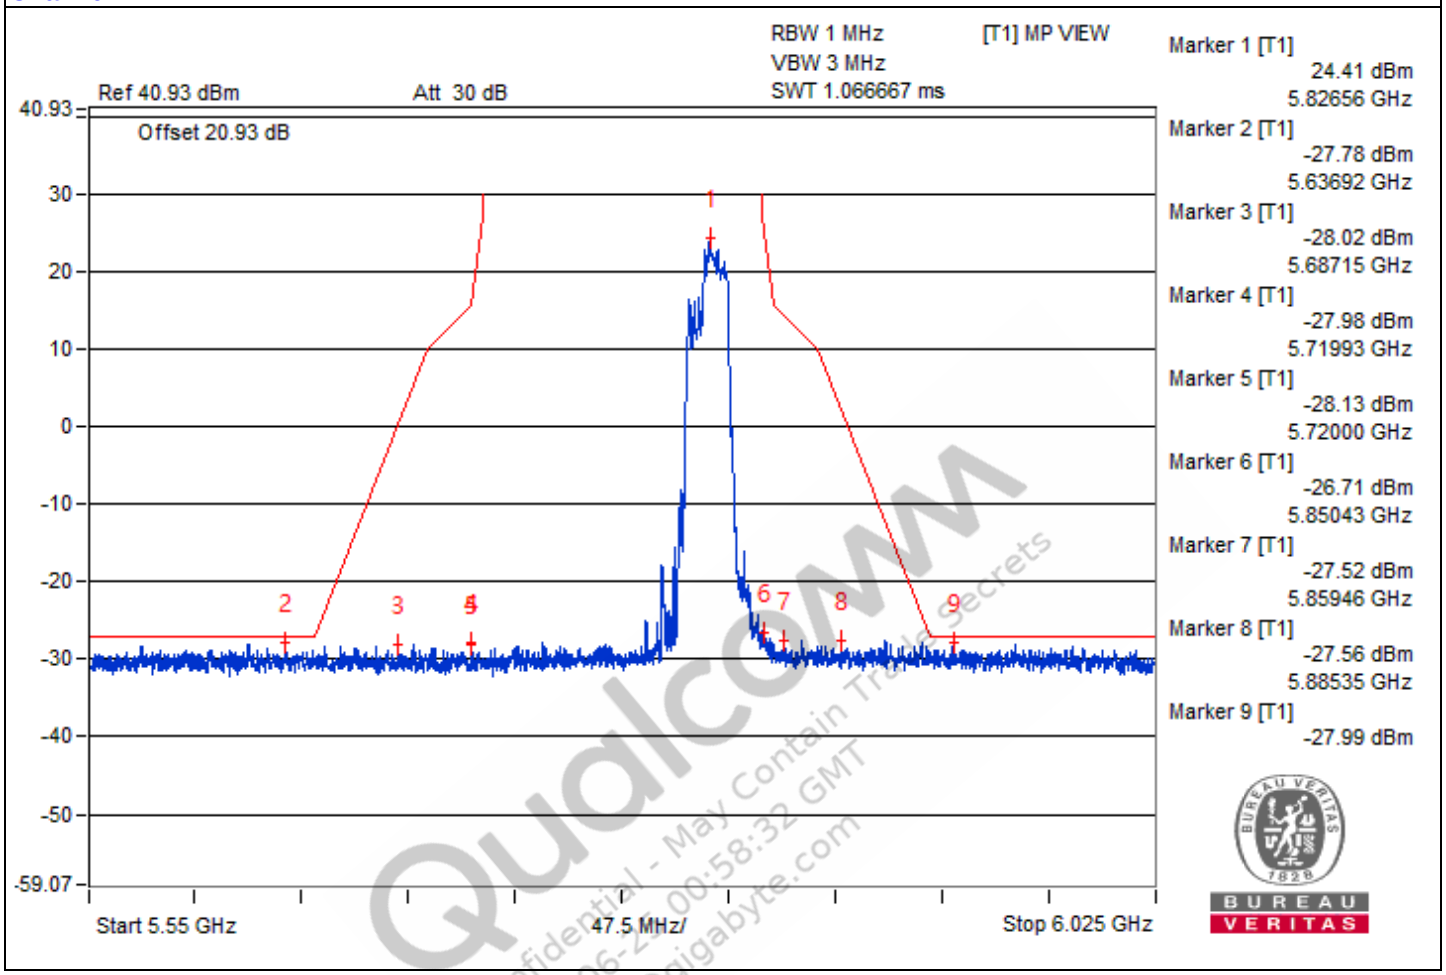

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

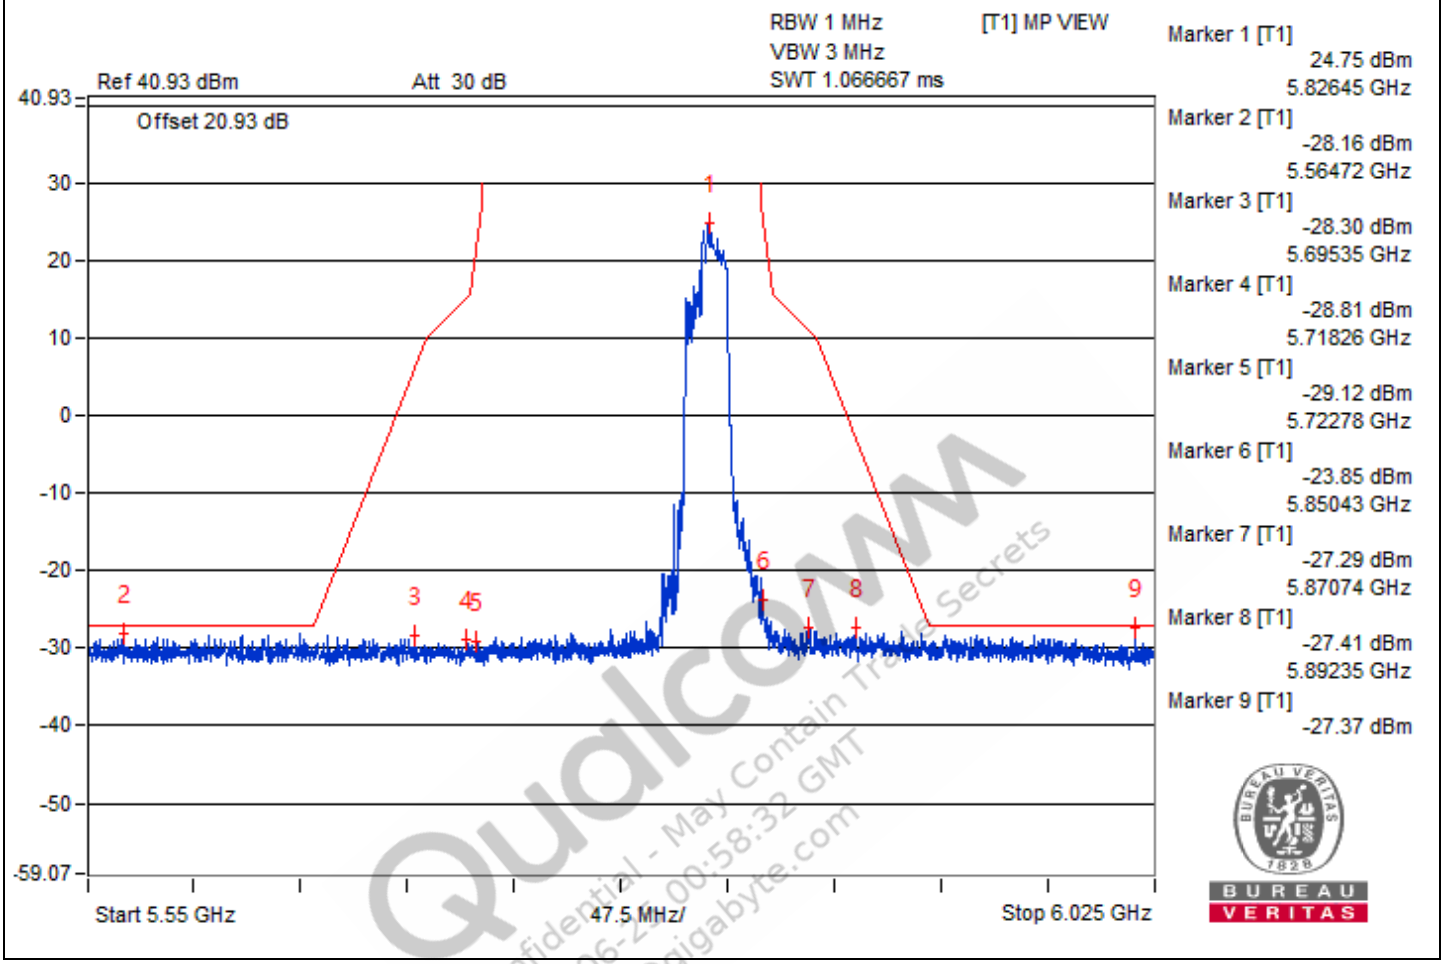

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT80) 484+242-tone RU - Channel 42


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5141.5	71.51 PK	74	-2.49	-38.47	-30.79	6.36	-23.75
2	5149.97	51.76 AV	54	-2.24	-54.39	-51.75	6.36	-43.50


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

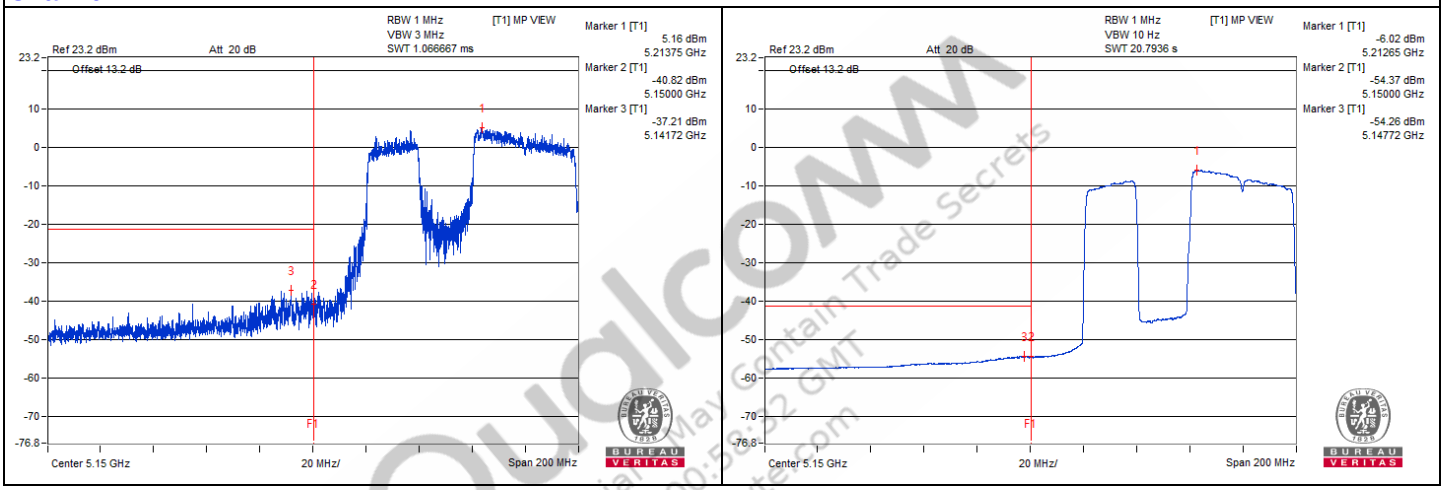

Chain 1

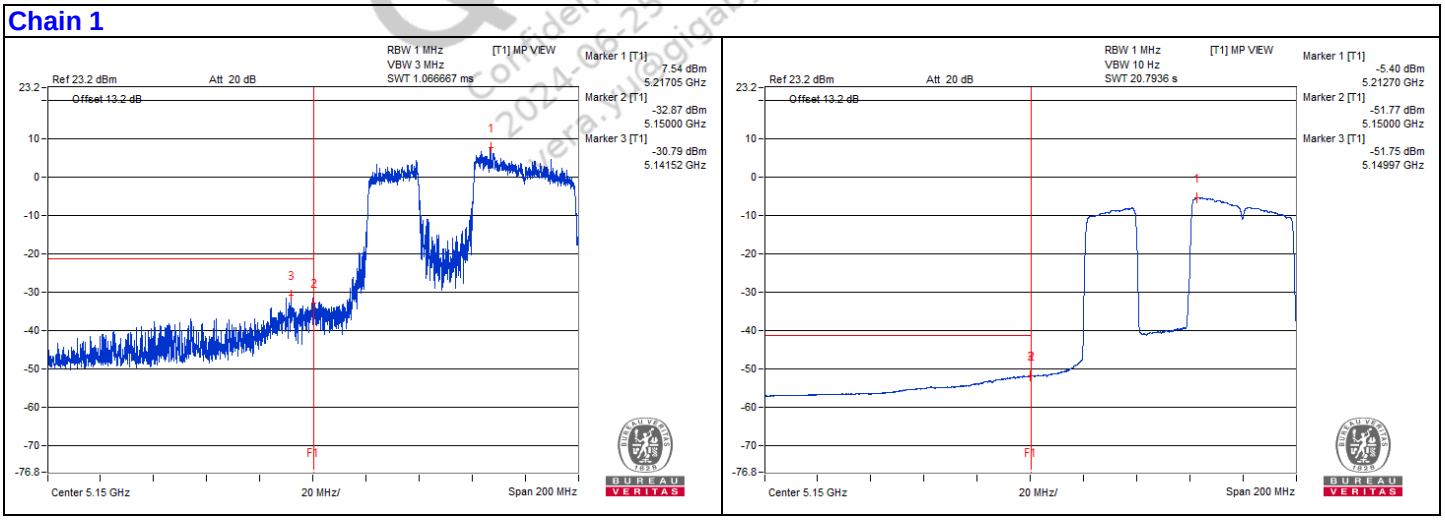

Qualcomm Confidential and Contain Trade Secrets 2024-06-25 00:58:32 GMT

802.11be (EHT80) 484+242-tone RU - Channel 58


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5353.25	67.23 PK	74	-6.77	-39.62	-36.04	6.43	-28.03
2	5355.57	52.61 AV	54	-1.39	-52.51	-51.71	6.43	-42.65


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

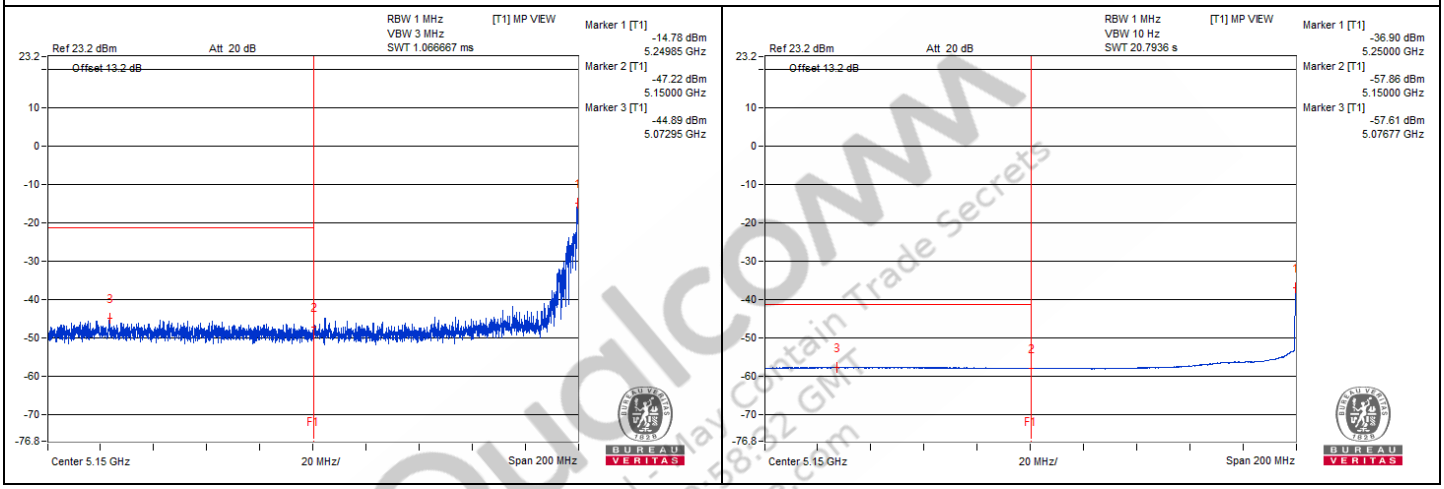

Chain 1

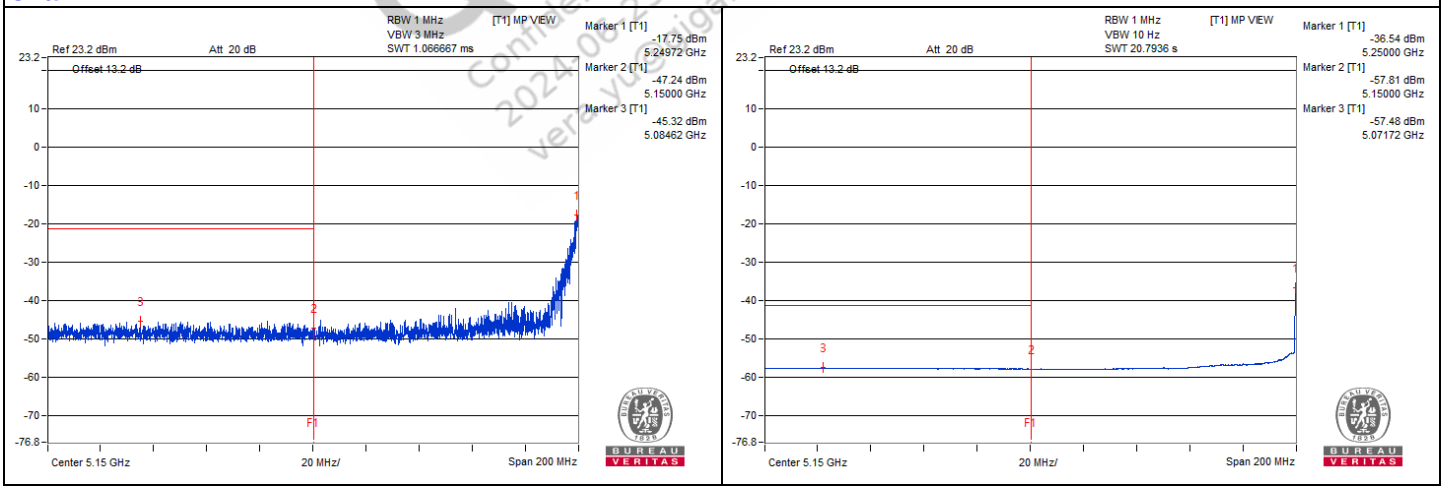

Qualcomm Confidential - May Contain Trade Secrets 2024-08-25 00:58:32 GMT Vera Verigabyte.com

802.11be (EHT80) 484+242-tone RU - Channel 138

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3548.43	57.49 PK	74	-16.51	-49.93	-48.15	8.17	-37.77
2	3565.62	47.32 AV	54	-6.68	-59.09	-59.15	8.17	-47.94
3	#7092.18	58.74 PK	68.2	-9.46	-47.94	-47.48	8.17	-36.52
4	10626.56	59.8 PK	74	-14.2	-47.09	-46.23	8.17	-35.46
5	10637.5	48.9 AV	54	-5.1	-57.45	-57.63	8.17	-46.36
6	15958.12	48.7 PK	74	-25.3	-57.87	-57.62	8.17	-46.56
7	15968.18	38.7 AV	54	-15.3	-67.84	-67.64	8.17	-56.56


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

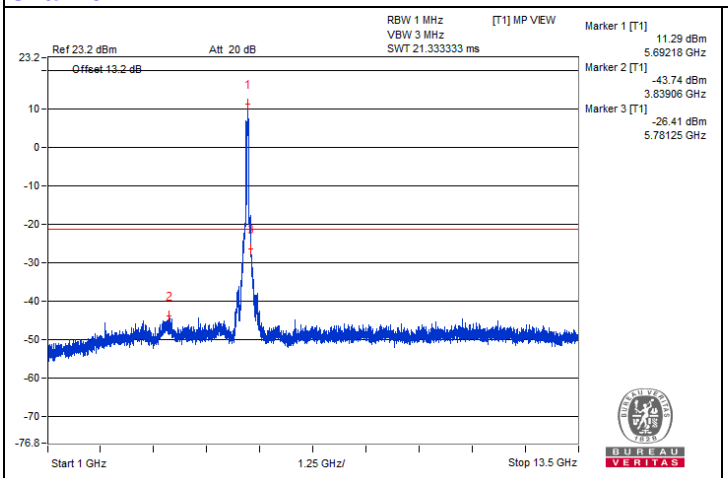


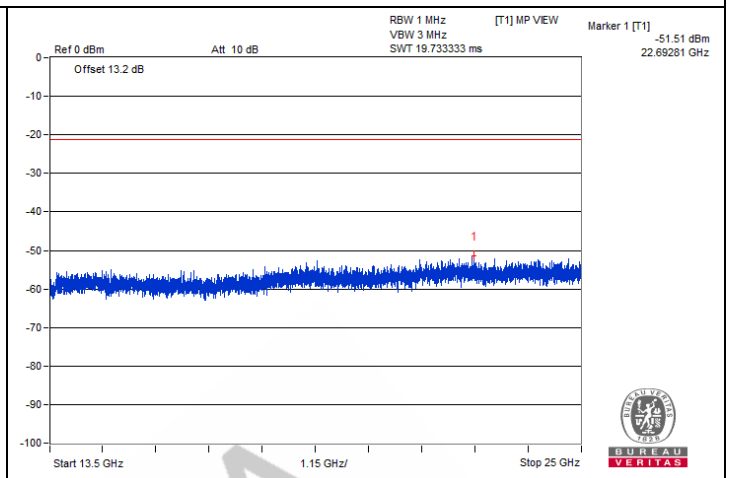

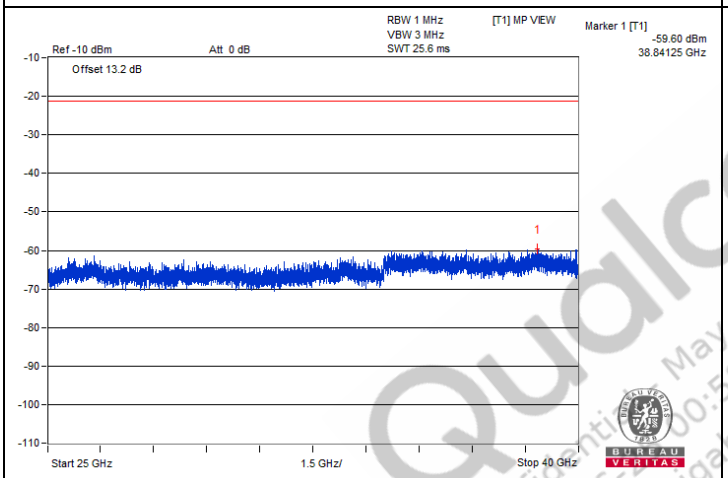

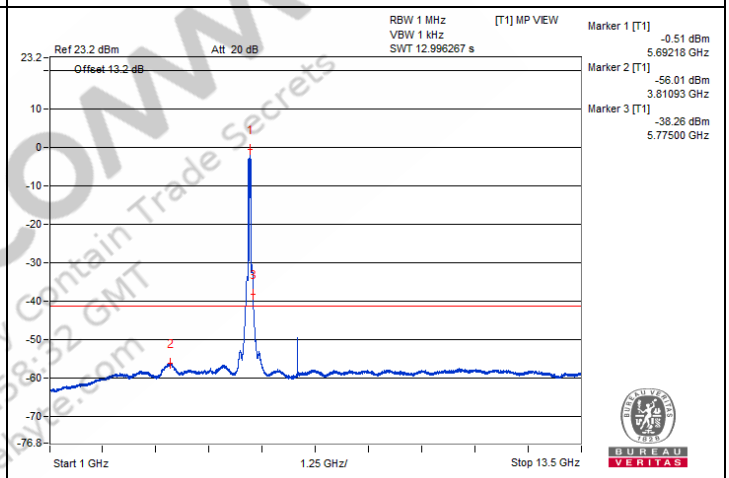


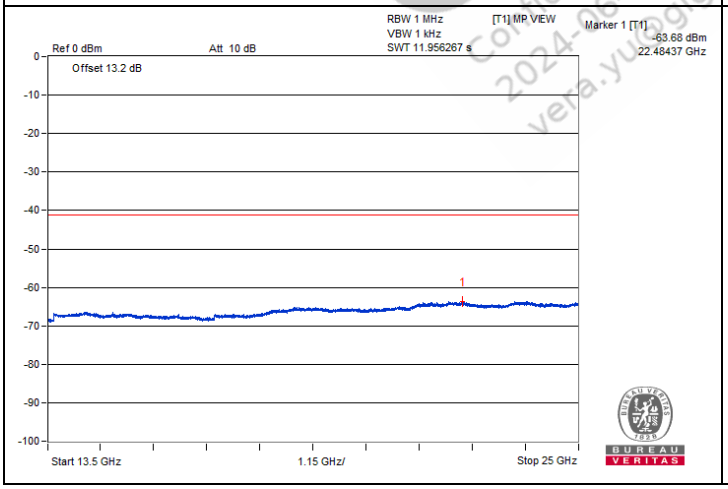


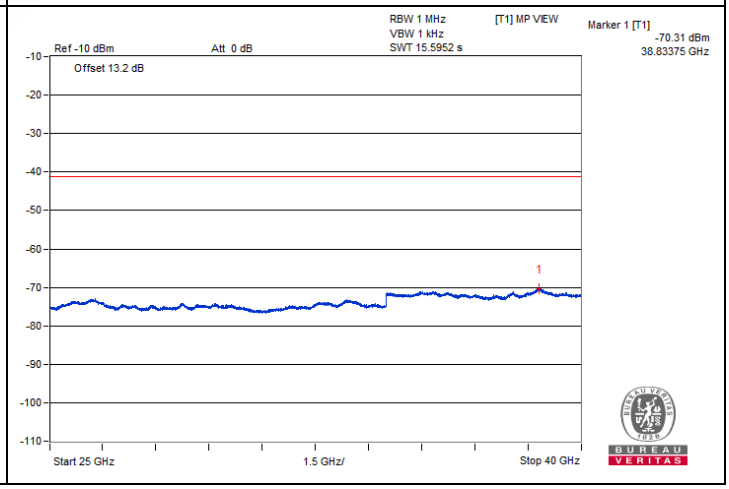



QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalane.com


Chain 1

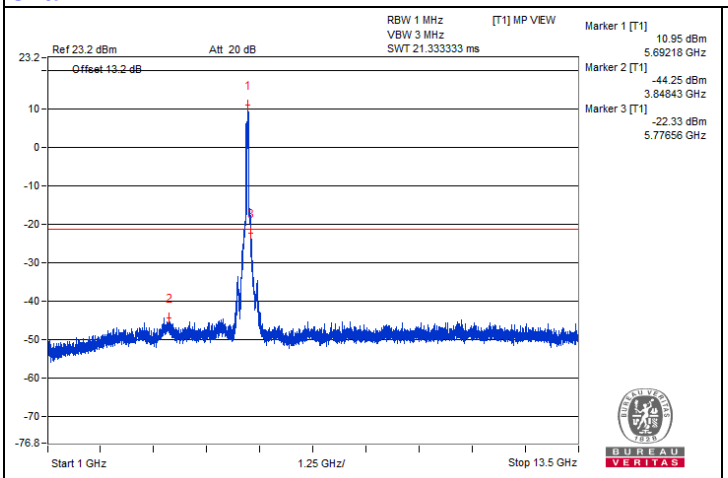


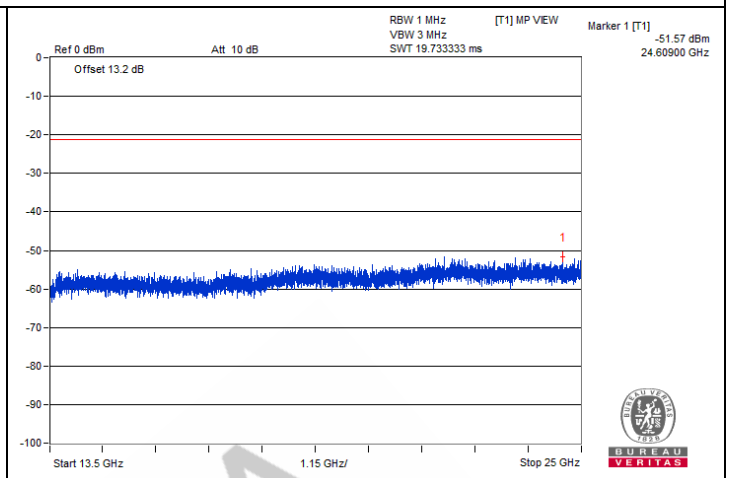

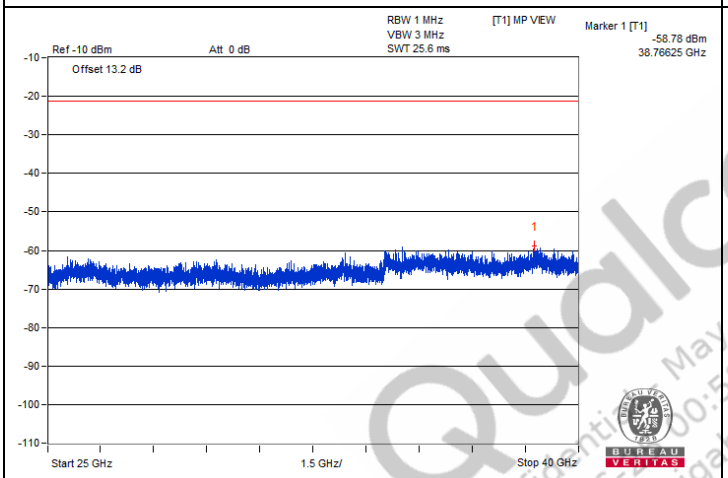

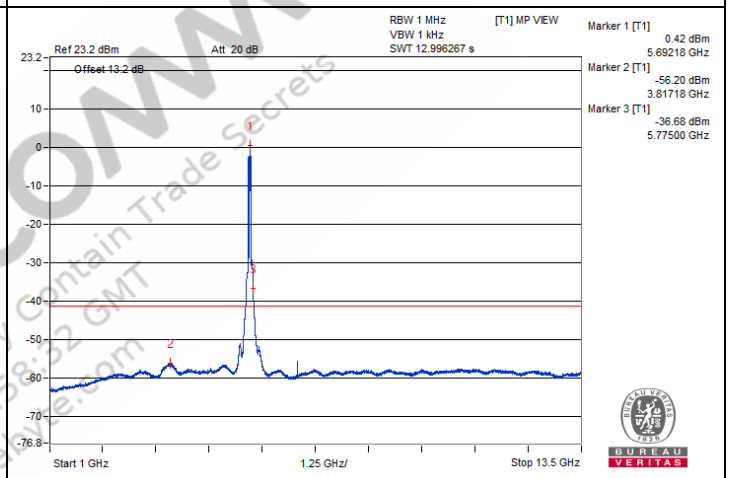

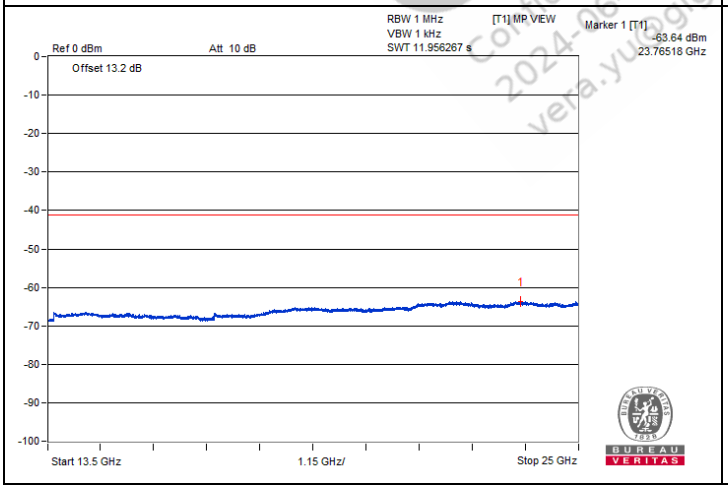

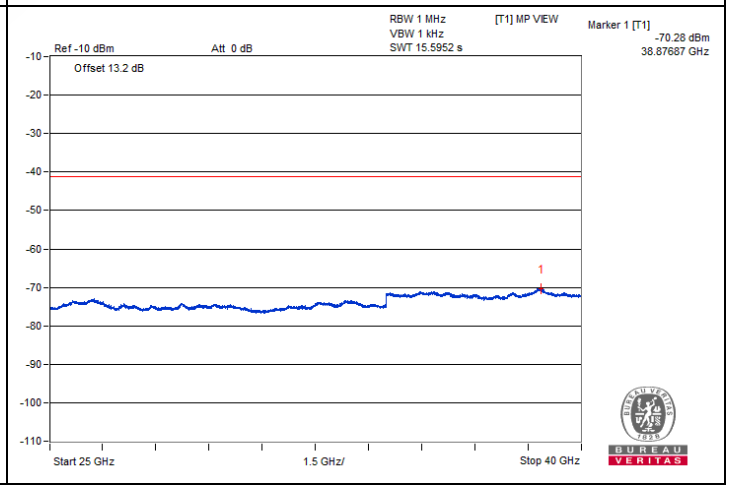

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-21 00:58:32 GMT
vera.yu@gigalive.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5907.85	66.9 PK	68.2	-1.3	-39.08	-39.3	7.82	-28.36


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

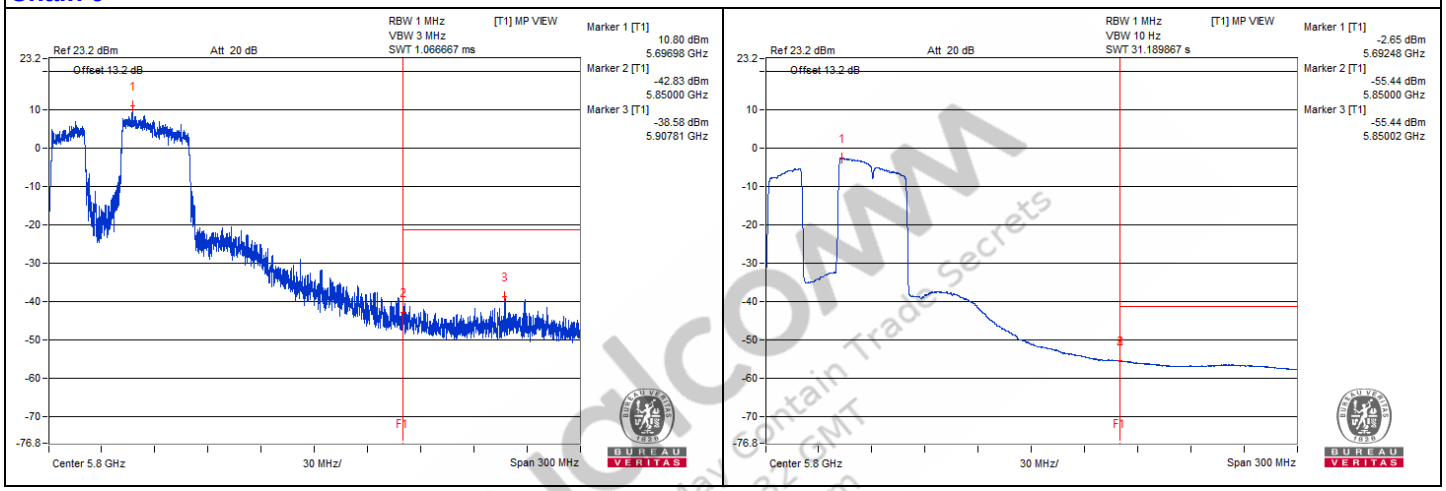

Chain 1

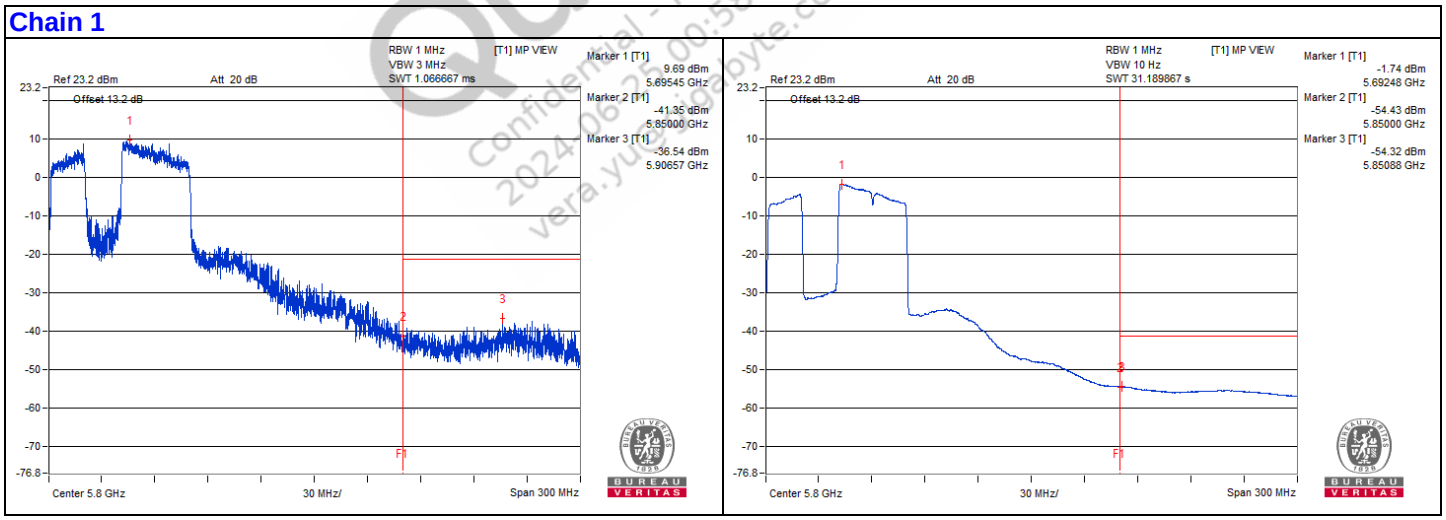

Quectel Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@quectel.com

802.11be (EHT80) 484+242-tone RU - Channel 155

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3556.25	57.91 PK	74	-16.09	-47.27	-50.3	8.17	-37.35
2	3551.56	47.19 AV	54	-6.81	-59.17	-59.34	8.17	-48.07
3	#7085.93	59.97 PK	68.2	-8.23	-48.83	-44.95	8.17	-35.29
4	10648.43	59.25 PK	74	-14.75	-47.6	-46.81	8.17	-36.01
5	10645.31	48.79 AV	54	-5.21	-57.77	-57.53	8.17	-46.47
6	15969.62	49.15 PK	74	-24.85	-57.31	-57.27	8.17	-46.11
7	15976.81	38.86 AV	54	-15.14	-67.55	-67.61	8.17	-56.40


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

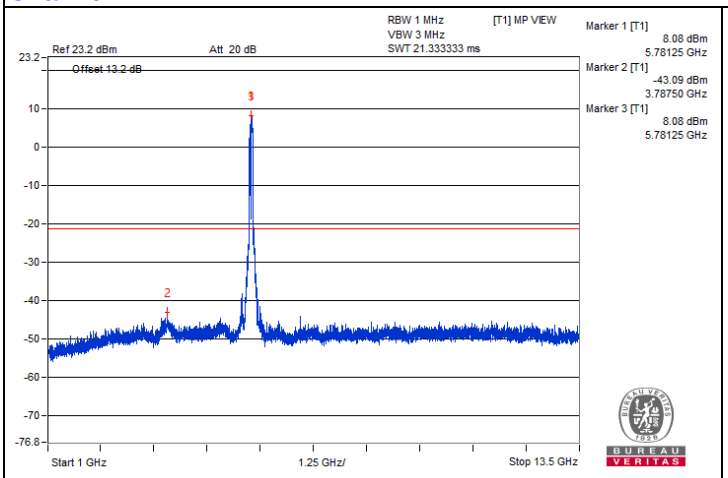


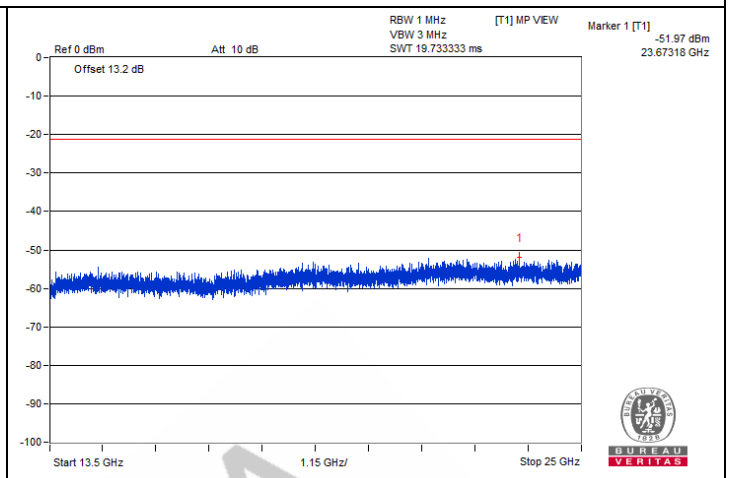

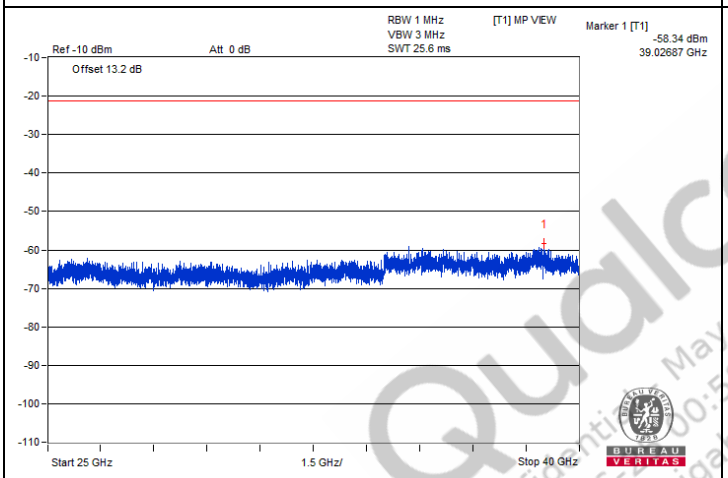

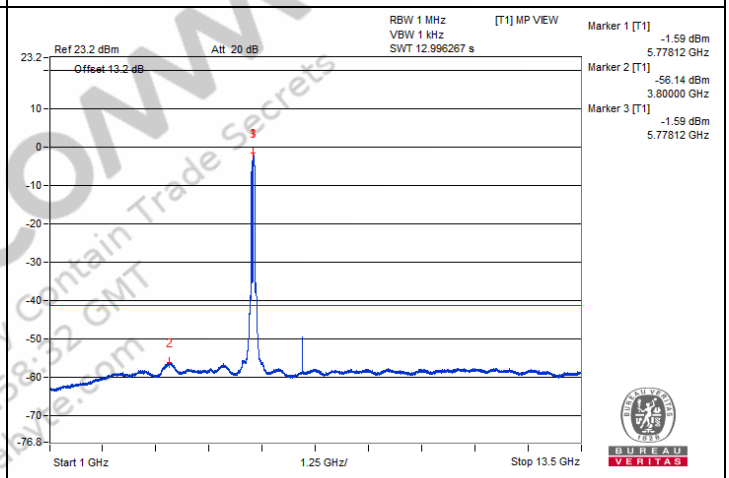


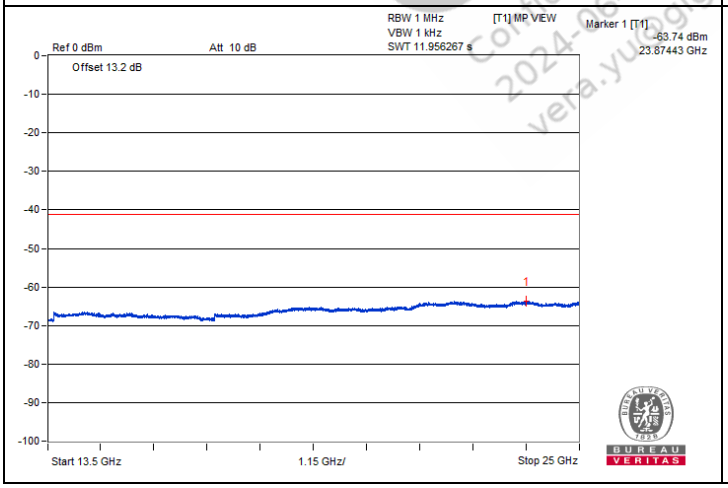


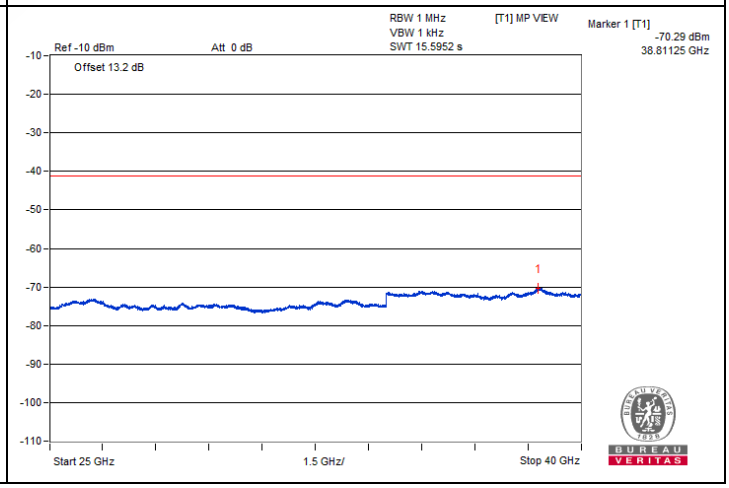



QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalane.com


Chain 1

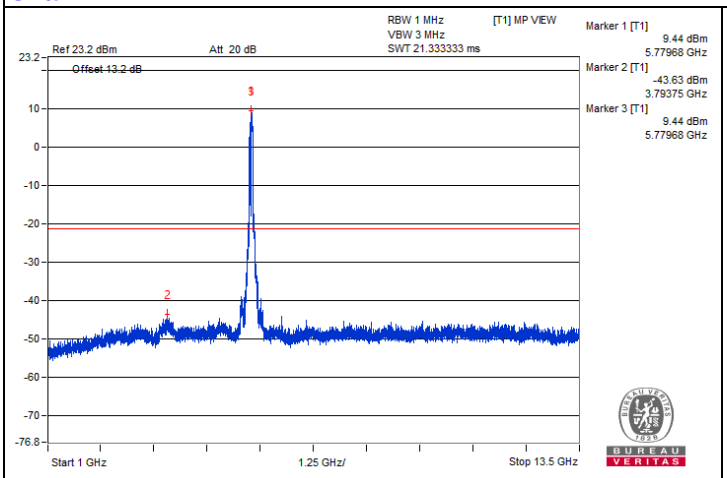


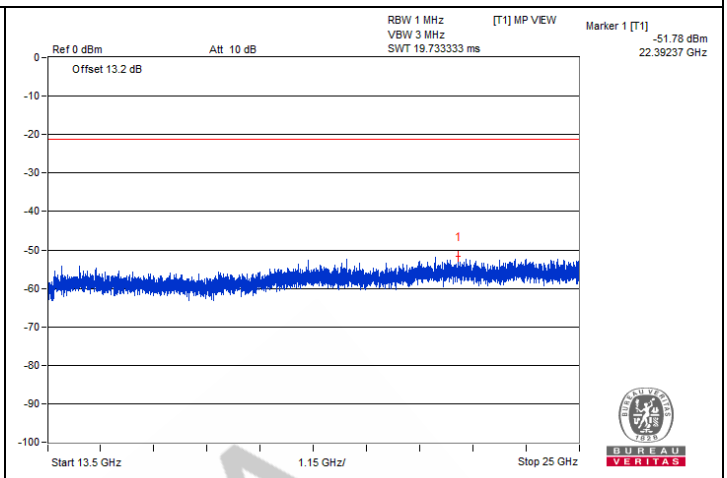

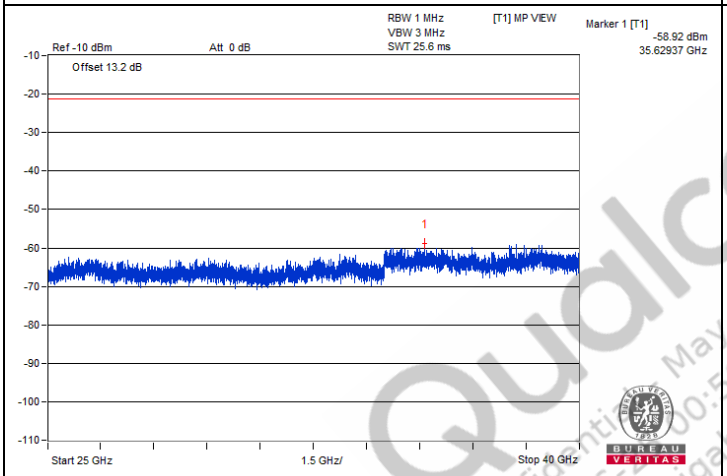

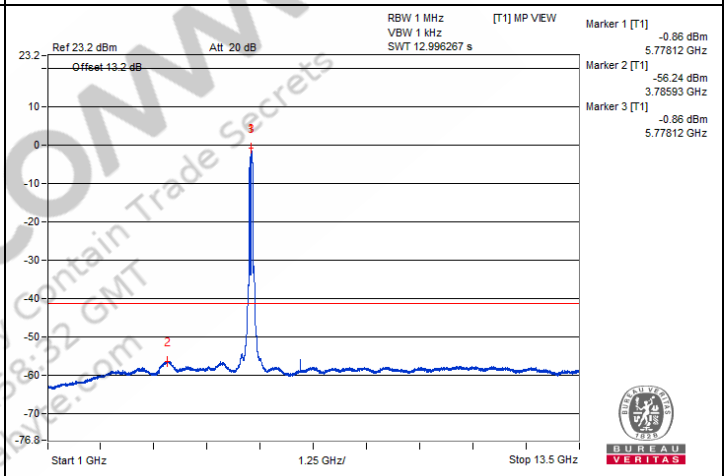

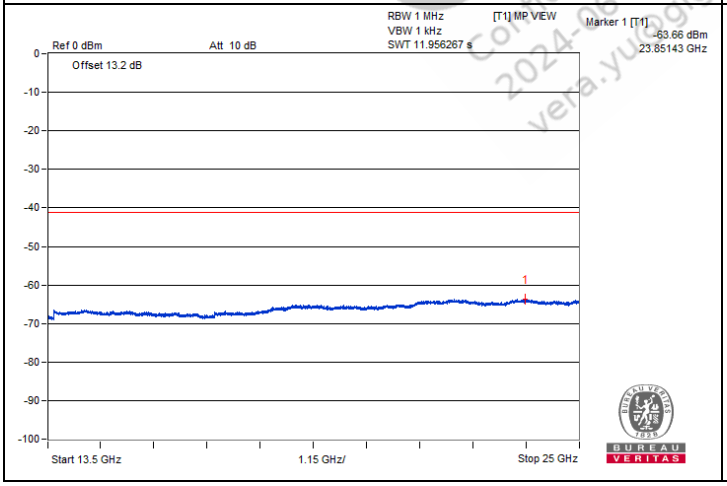

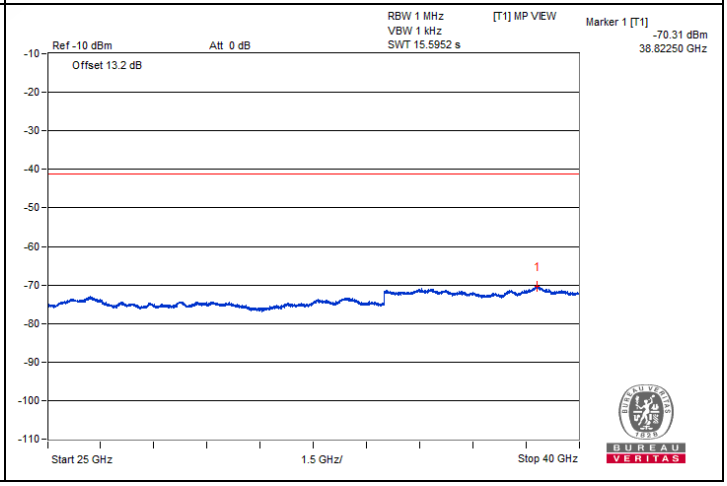

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalane.com

802.11be (EHT160) 996+484-tone RU - Channel 50


Bandedge table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5406.25	70.9 PK	74	-3.1	-38.13	-31.68	6.43	-24.36
2	5424.67	52.74 AV	54	-1.26	-52.06	-51.87	6.43	-42.52


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.

Chain 0

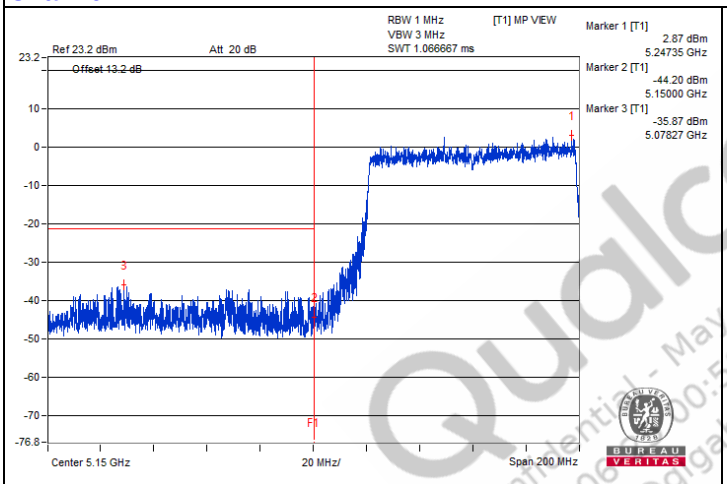

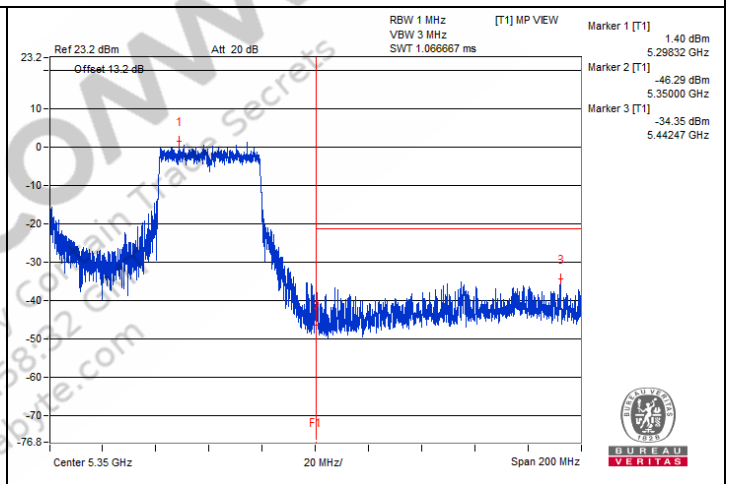


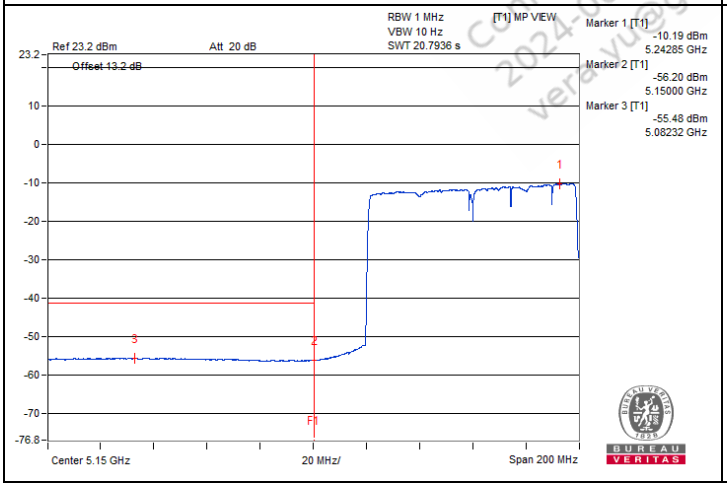


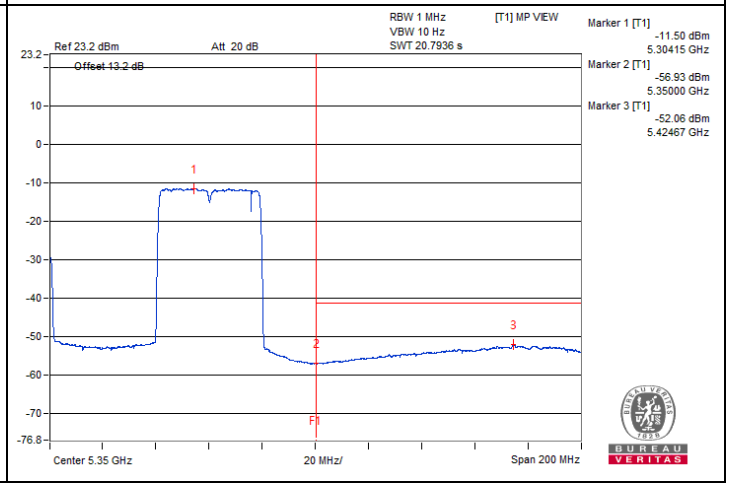



Qualcomm Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@bureauveritas.com

Chain 1

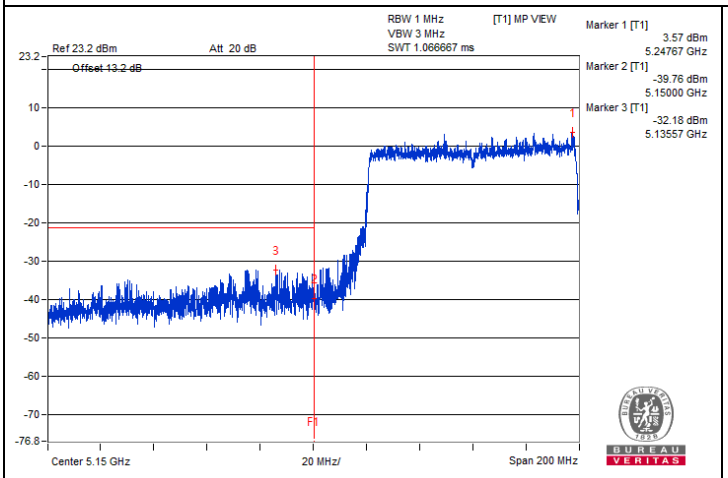

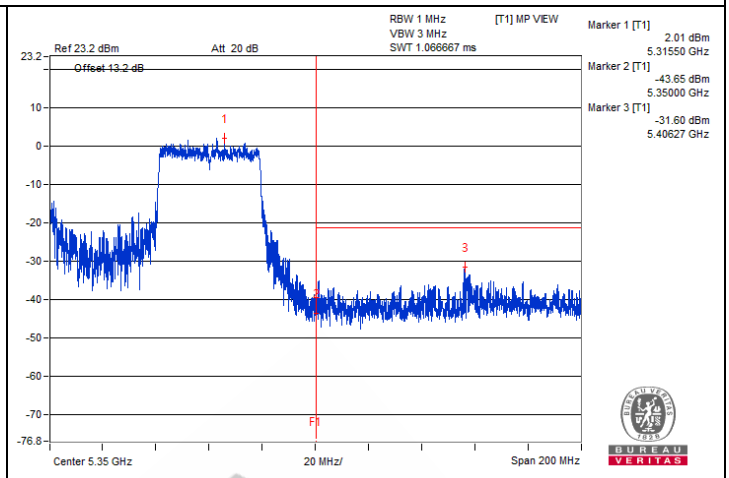

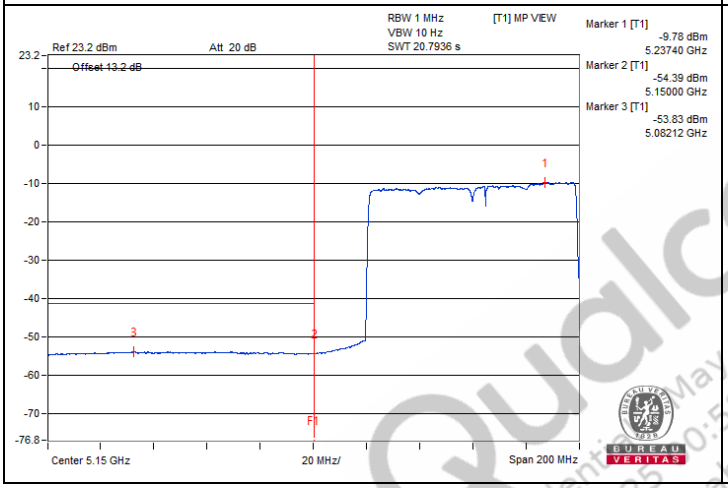

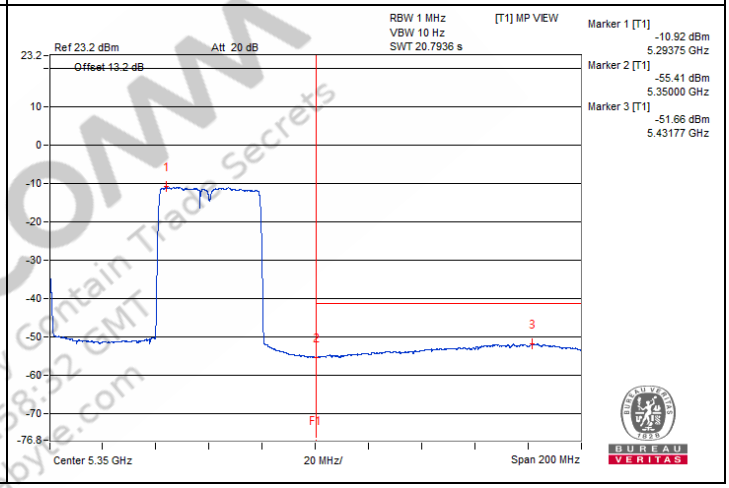

QualcoMM
Confidential - May Contain Trade Secrets
2024-06-25 10:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT160) 996+484-tone RU - Channel 114


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5467.09	67.99 PK	68.2	-0.21	-45.2	-35.54	7.82	-27.27

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

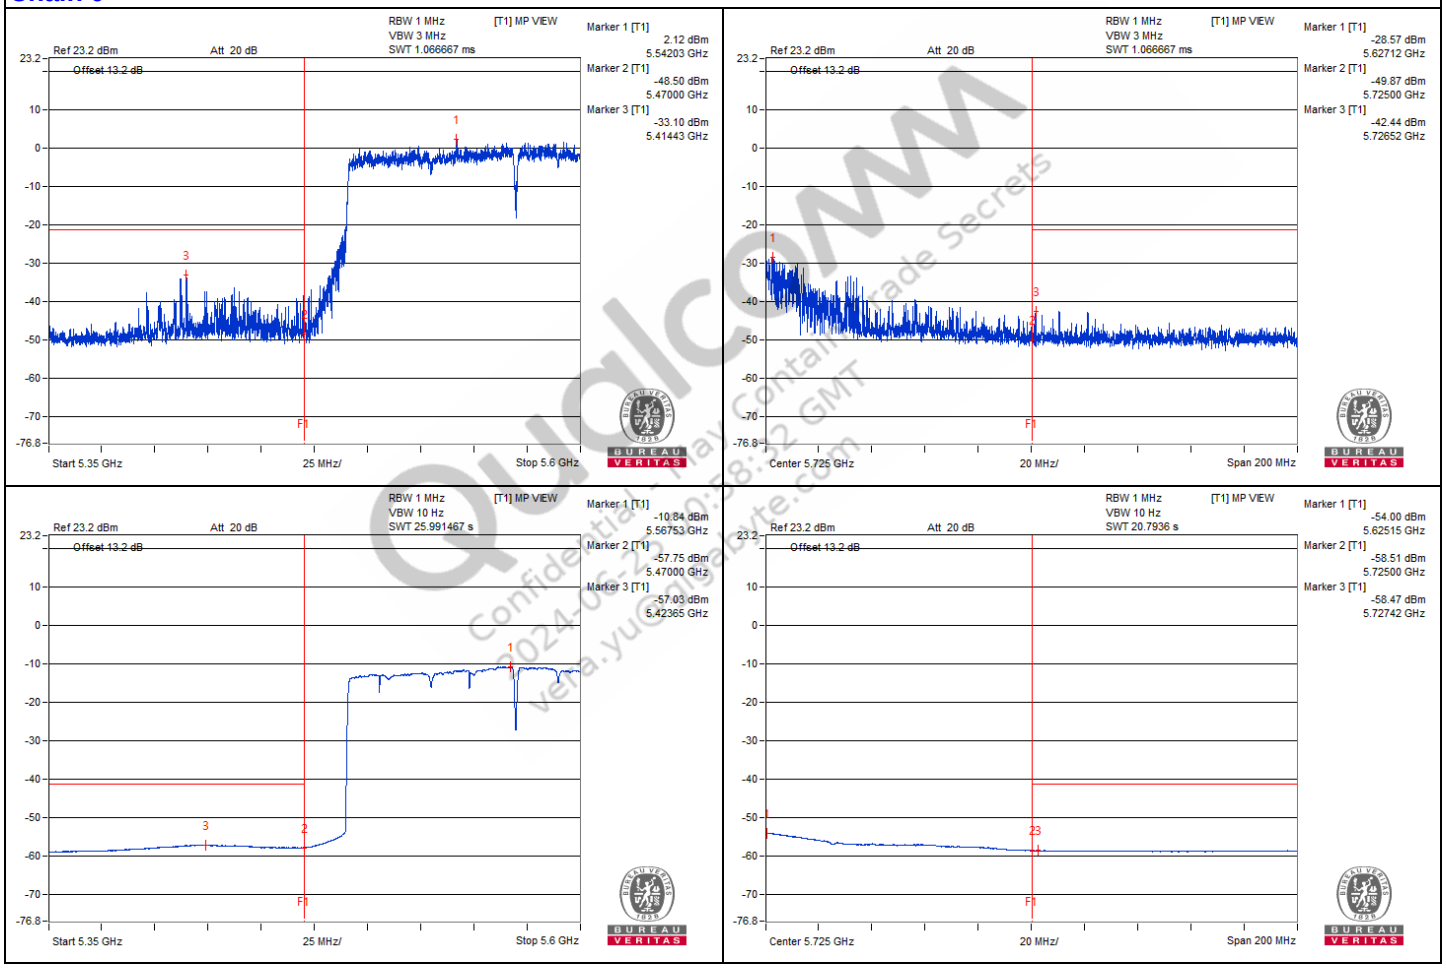



Qualcomm Confidential - Pay Contain Trade Secrets 2024-06-20 10:58:32 GMT vera.yu@siarte.com

Chain 1

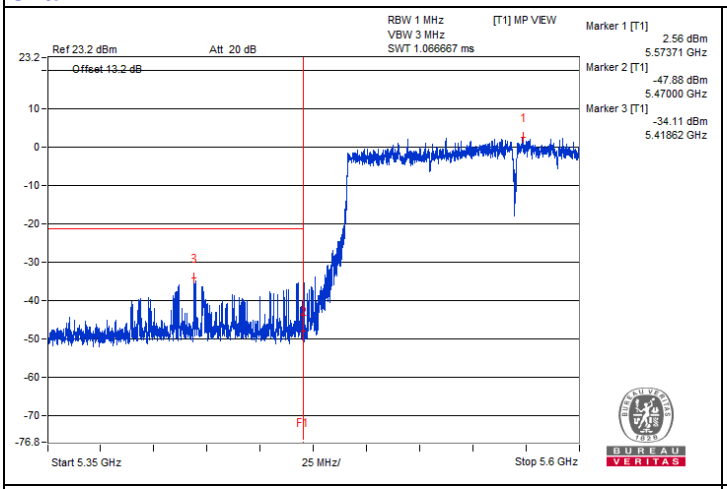

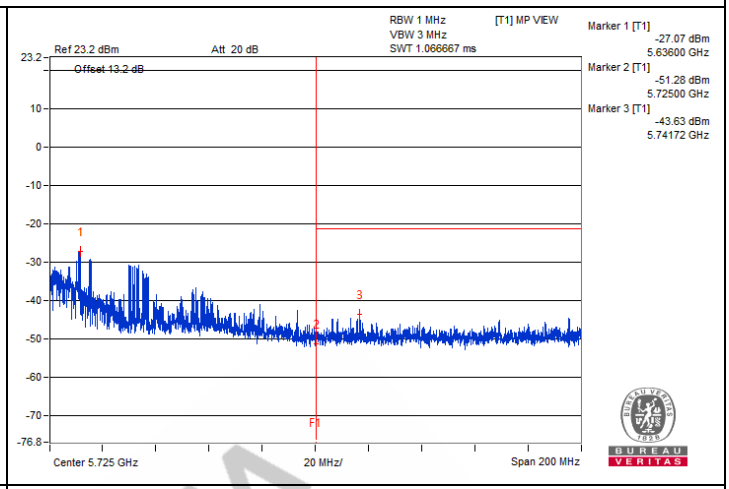

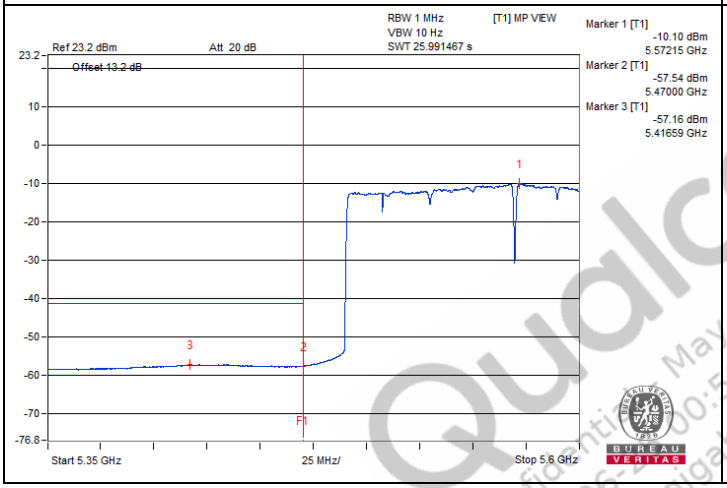

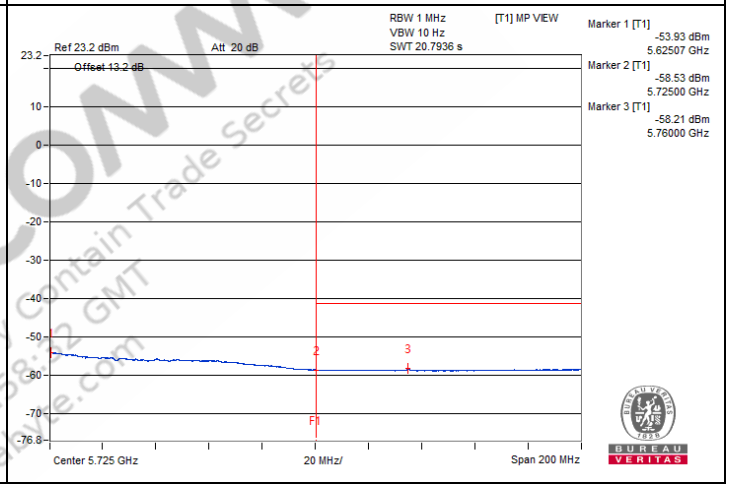

QualcOMM
Confidential | May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalogue.com

802.11be (EHT80) Punctured by 20 MHz - Channel 42

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#3460.93	58.47 PK	68.2	-9.73	-47.05	-49.13	8.17	-36.79
2	#6940.62	59.1 PK	68.2	-9.1	-49.41	-45.95	8.17	-36.16
3	#10401.56	59.64 PK	68.2	-8.56	-46.49	-47.13	8.17	-35.62
4	15601.62	49.2 PK	74	-24.8	-58.59	-56.21	8.17	-46.06
5	15591.56	39.11 AV	54	-14.89	-67.4	-67.27	8.17	-56.15


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

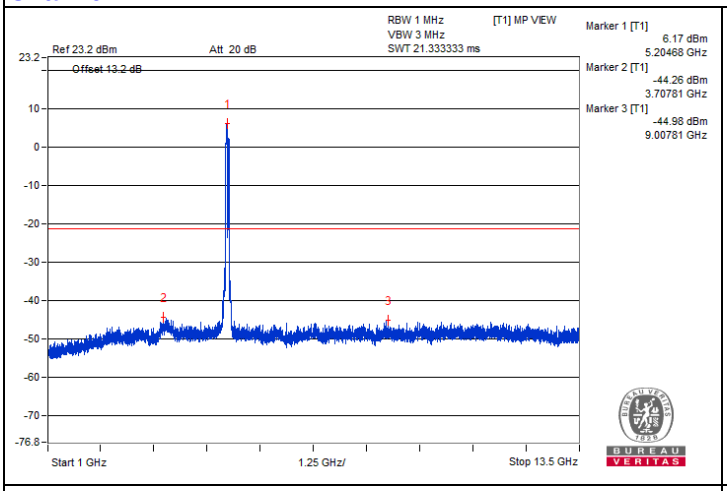


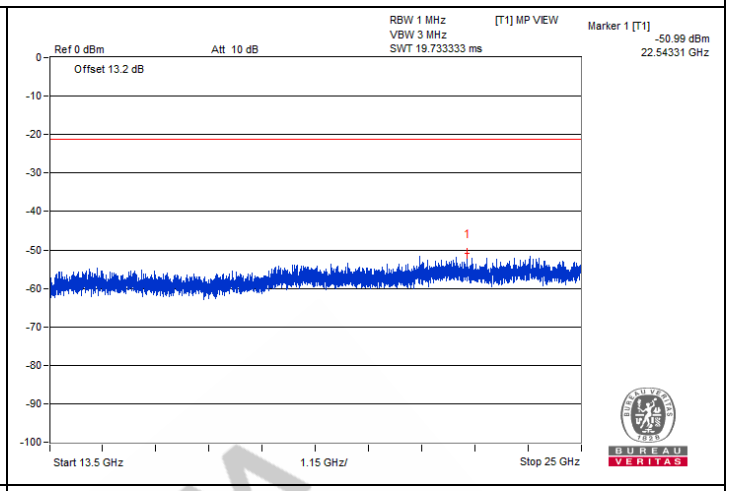

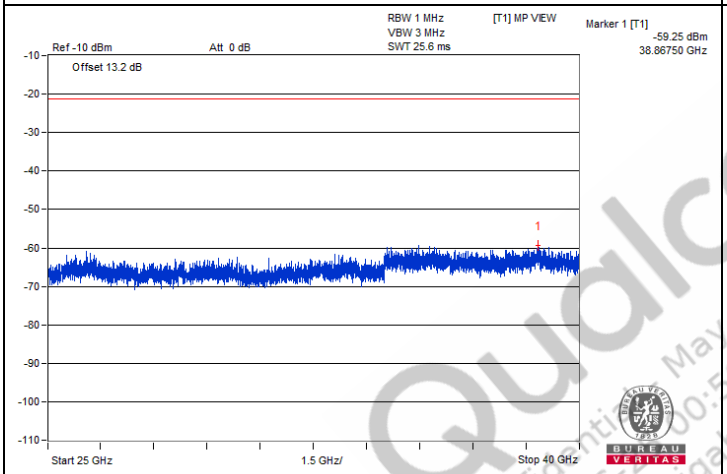

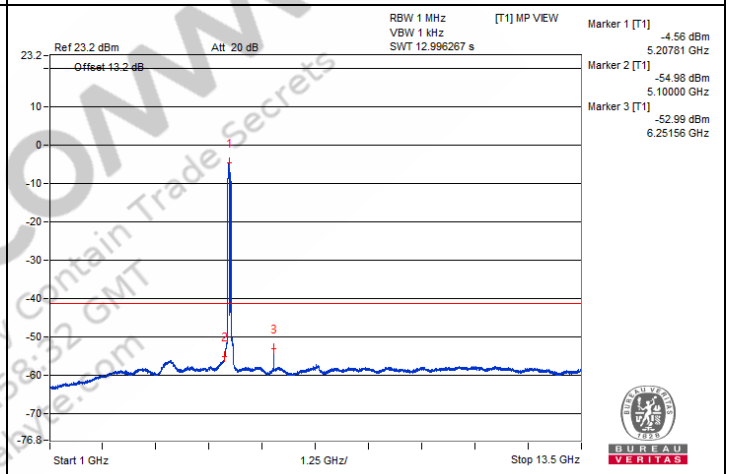


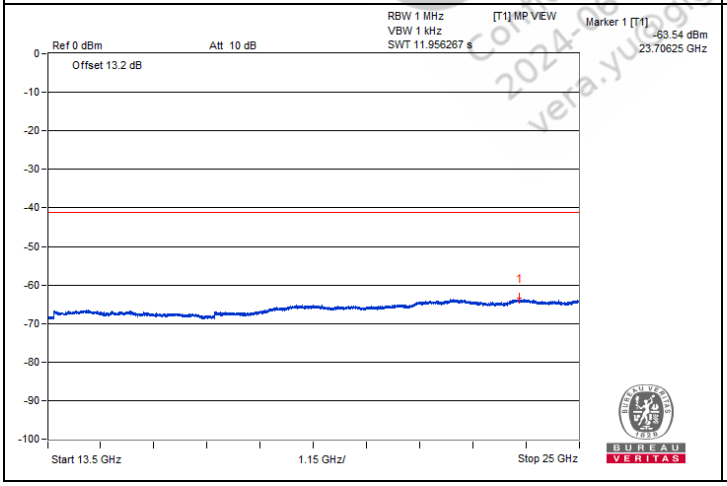


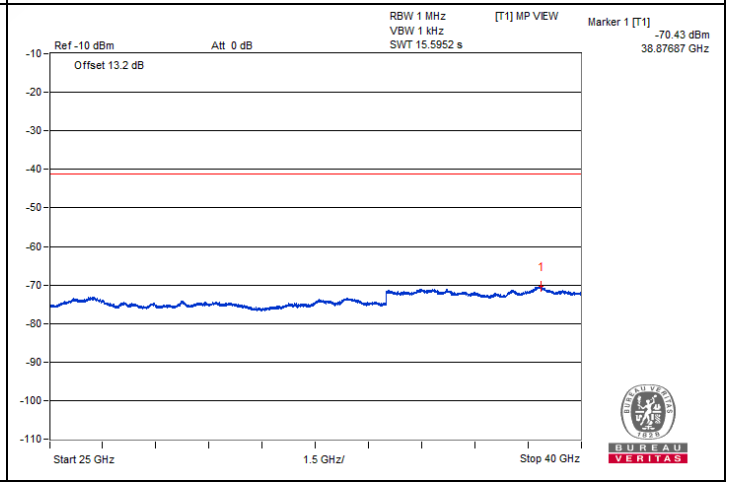



QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalane.com


Chain 1

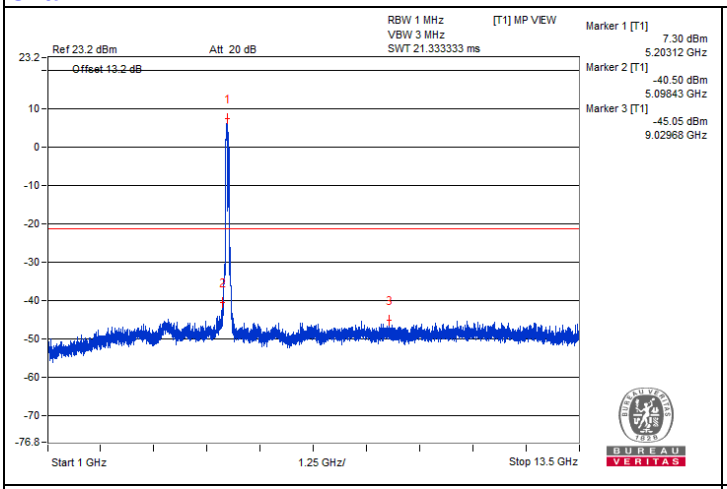


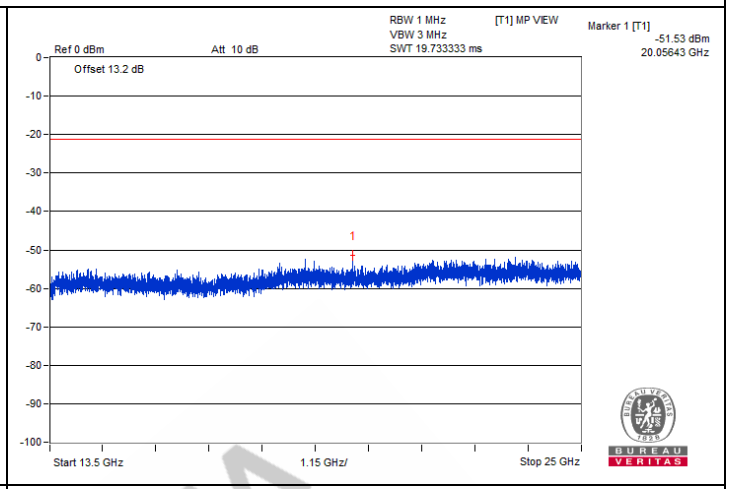

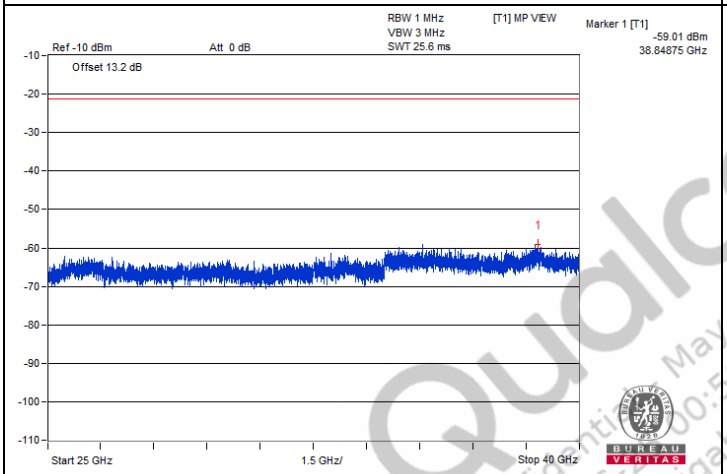

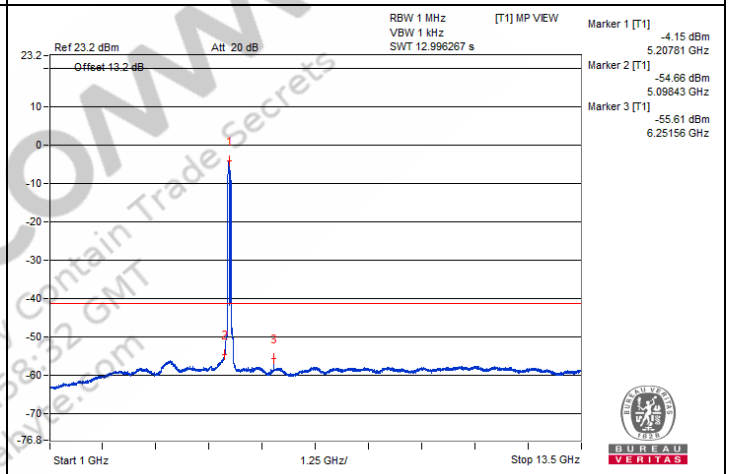

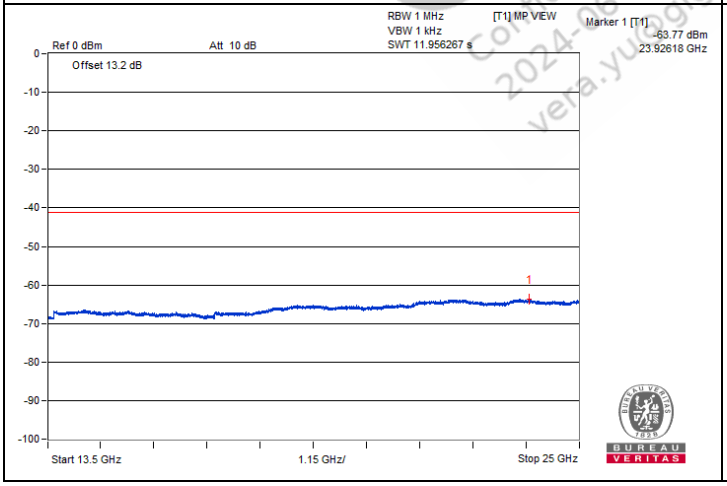

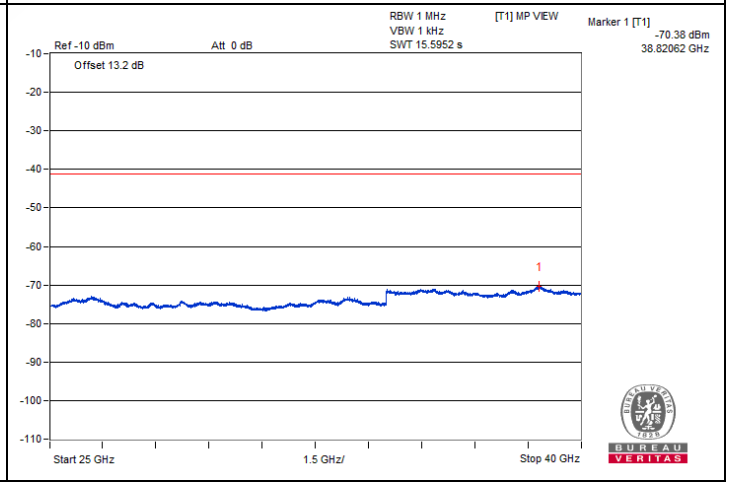

QualcOMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalane.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5148.02	73.3 PK	74	-0.7	-38.7	-28.74	6.36	-21.96
2	5147.37	53.33 AV	54	-0.67	-52.4	-50.43	6.36	-41.93

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

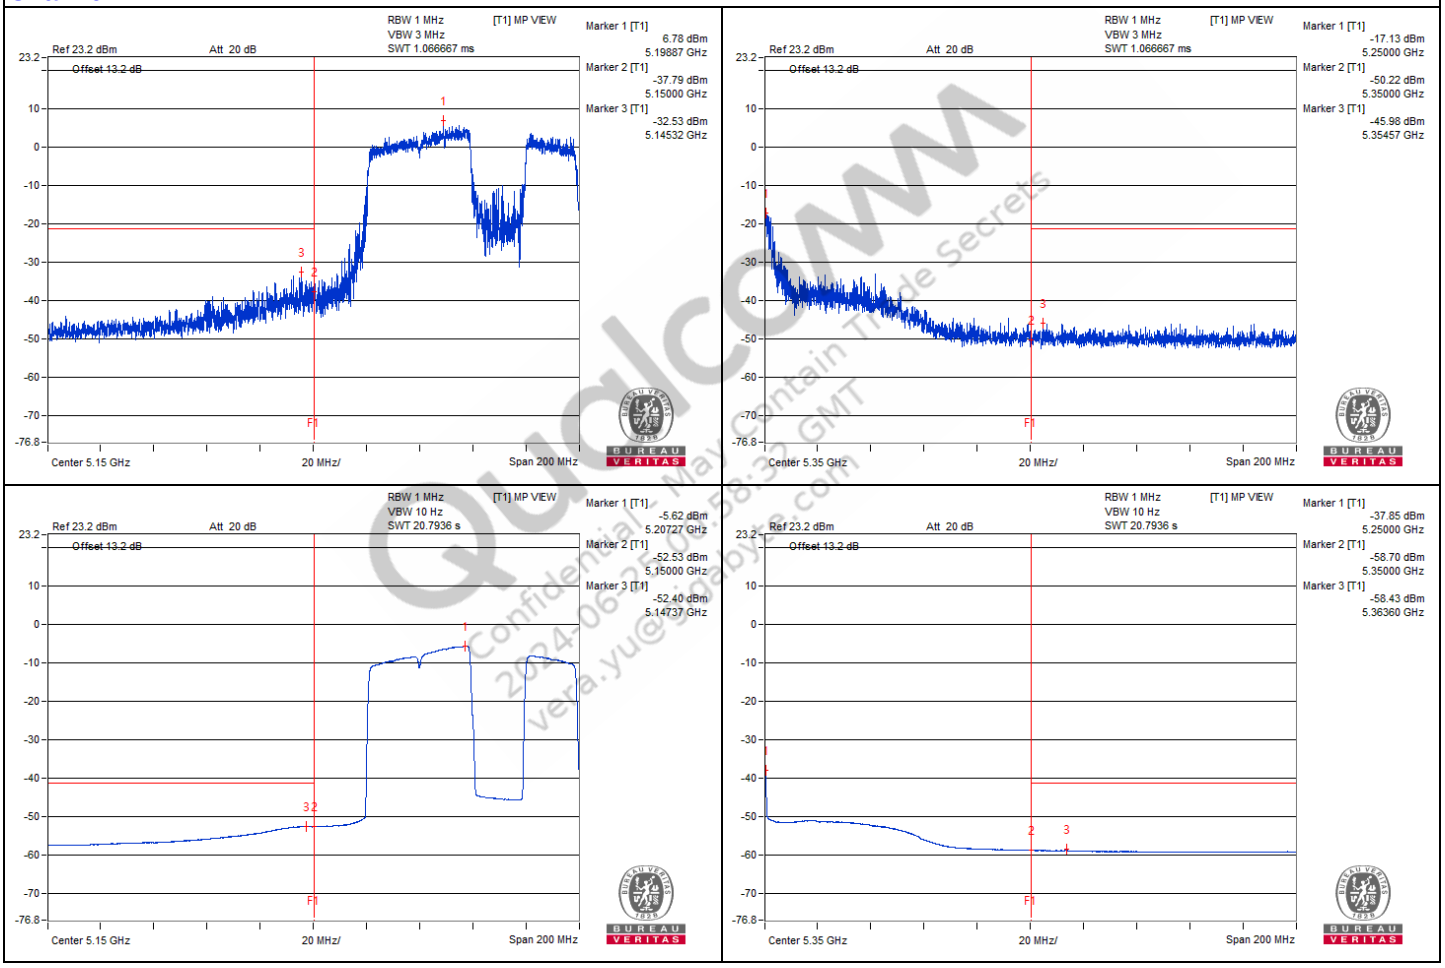



Qualcomm Confidential - May contain Trade Secrets 2024-06-25 08:32 GMT vera.yue@sabyta.com

Chain 1

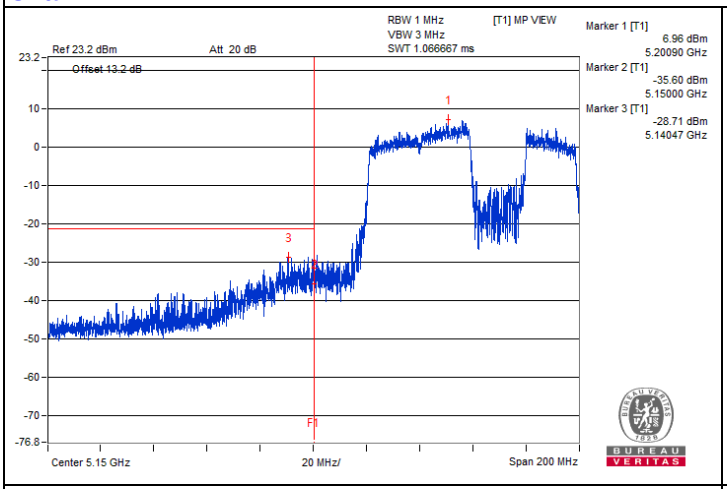

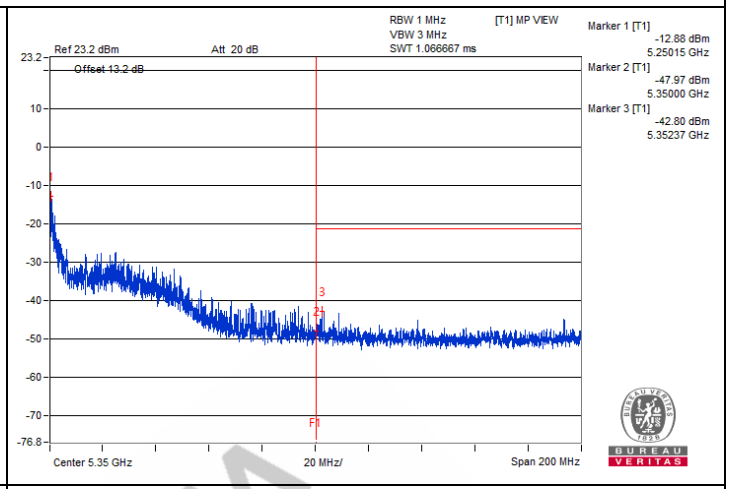

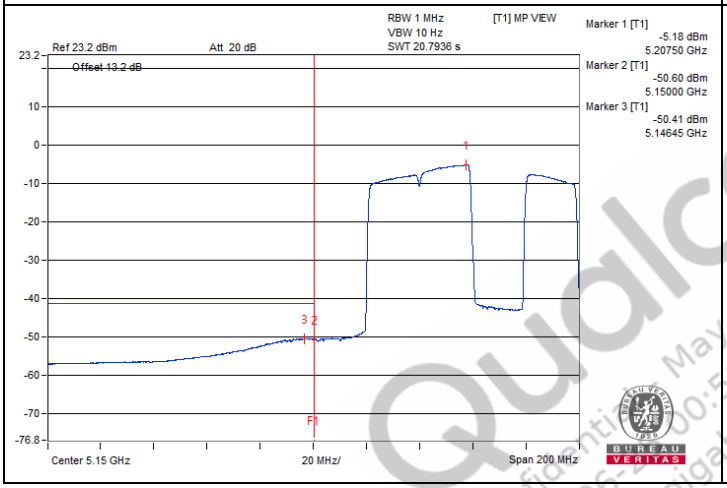

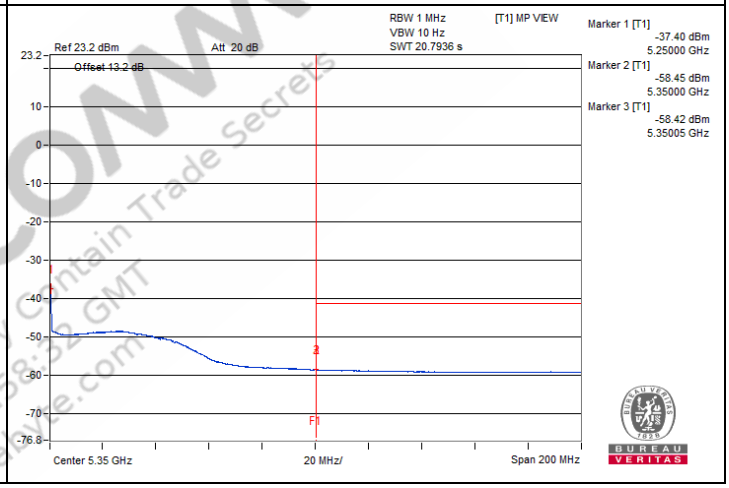

QualcOMM
Confidential | May Contain Trade Secrets
2024-06-21 00:58:32 GMT
vera.yu@gigahertz.com

802.11be (EHT80) Punctured by 20 MHz - Channel 58

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3539.06	57.65 PK	74	-16.35	-48.53	-49.07	8.17	-37.61
2	3559.37	47.3 AV	54	-6.7	-59.39	-58.9	8.17	-47.96
3	#7103.12	59.08 PK	68.2	-9.12	-47.23	-47.49	8.17	-36.18
4	10634.37	59.46 PK	74	-14.54	-46.58	-47.43	8.17	-35.80
5	10651.56	48.72 AV	54	-5.28	-57.72	-57.73	8.17	-46.54
6	15963.87	48.86 PK	74	-25.14	-58.87	-56.58	8.17	-46.40
7	15943.75	38.76 AV	54	-15.24	-67.6	-67.76	8.17	-56.50


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

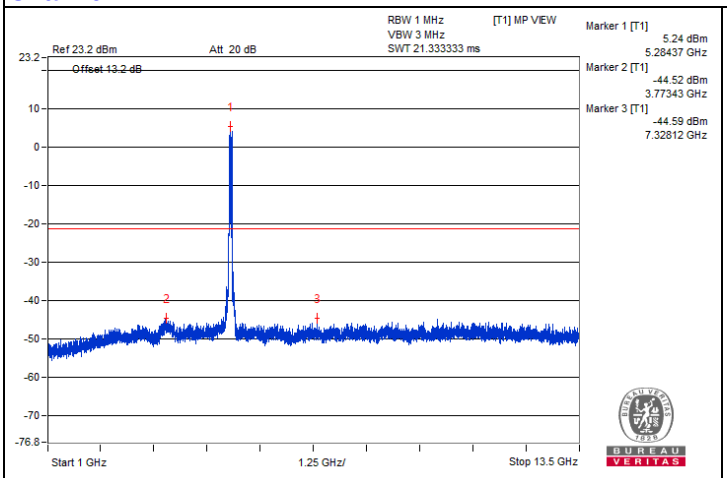


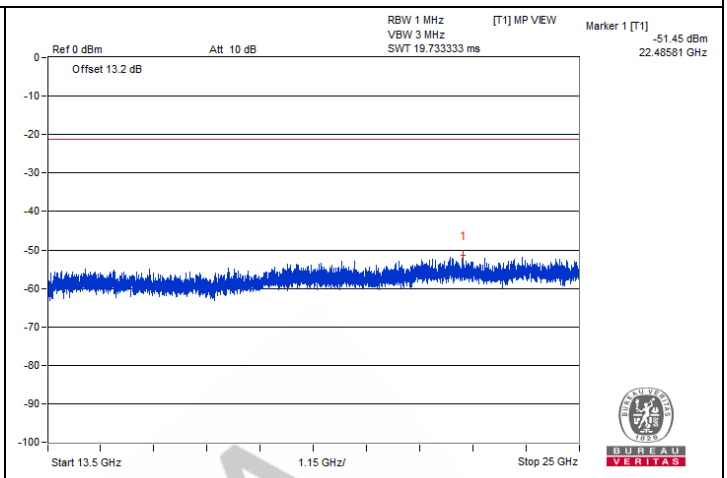

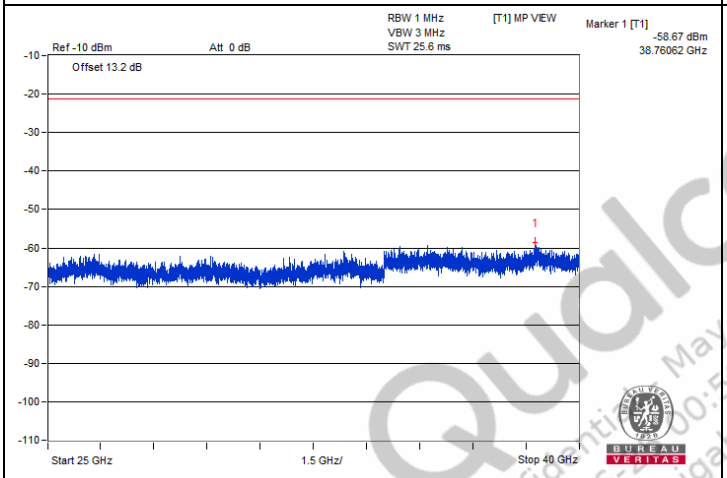

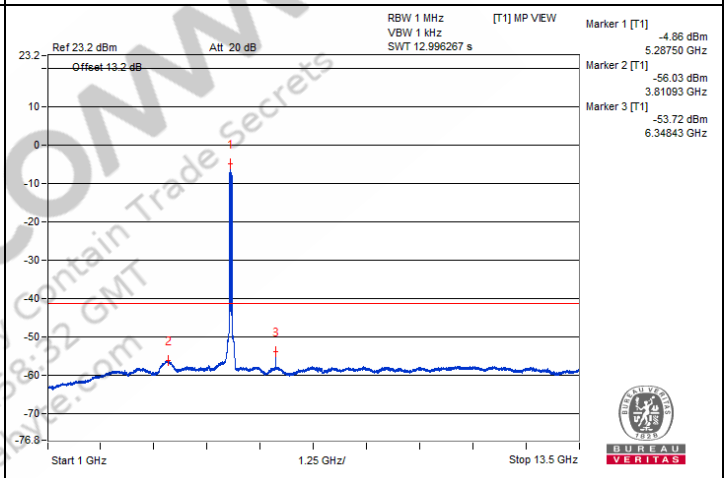


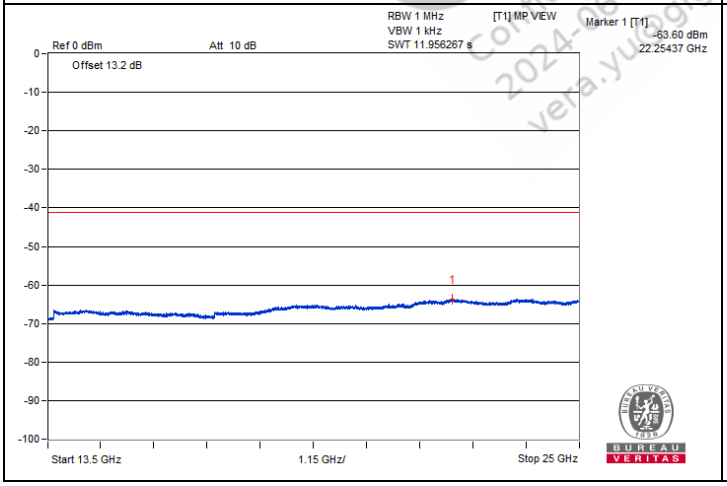


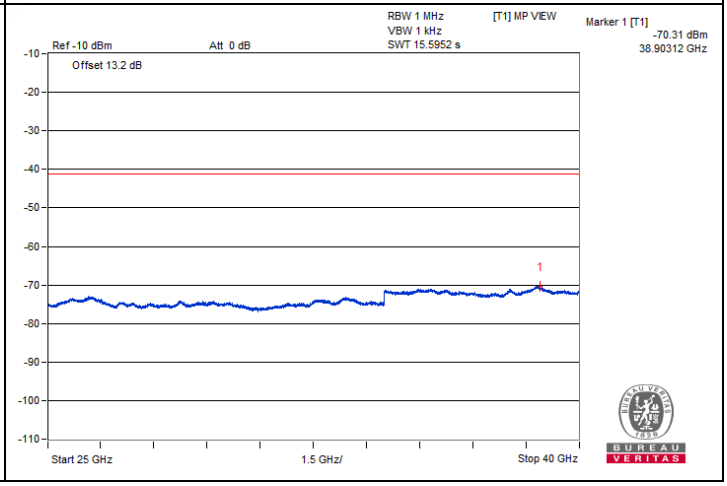



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalane.com


Chain 1

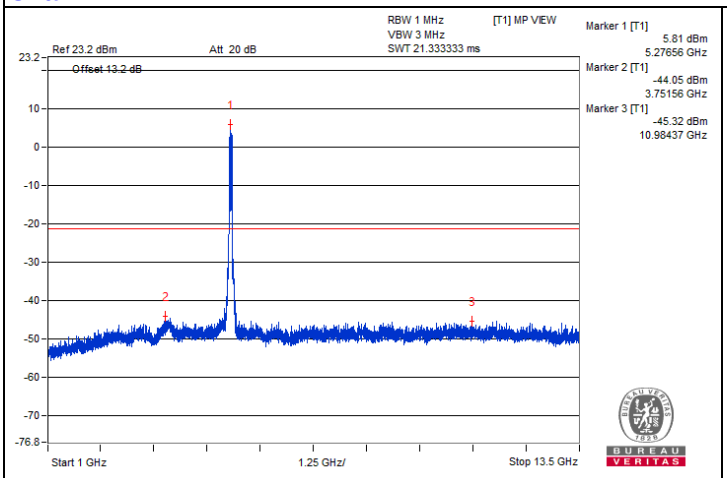


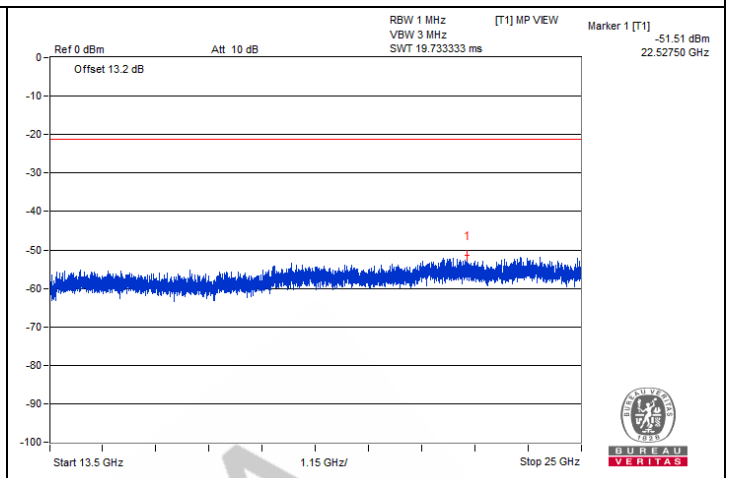

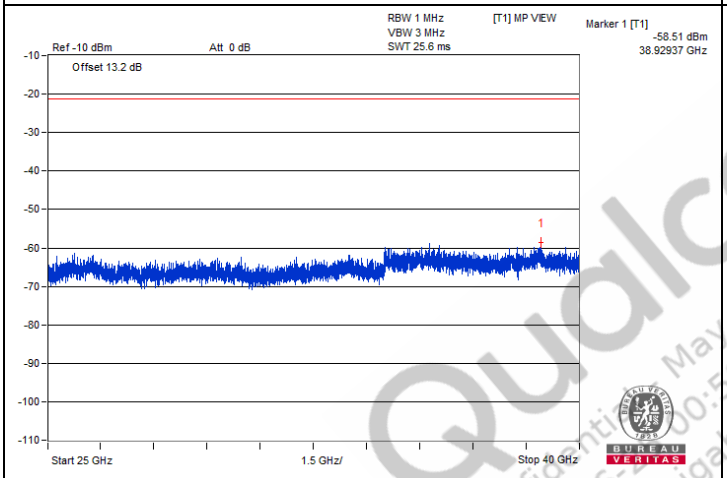

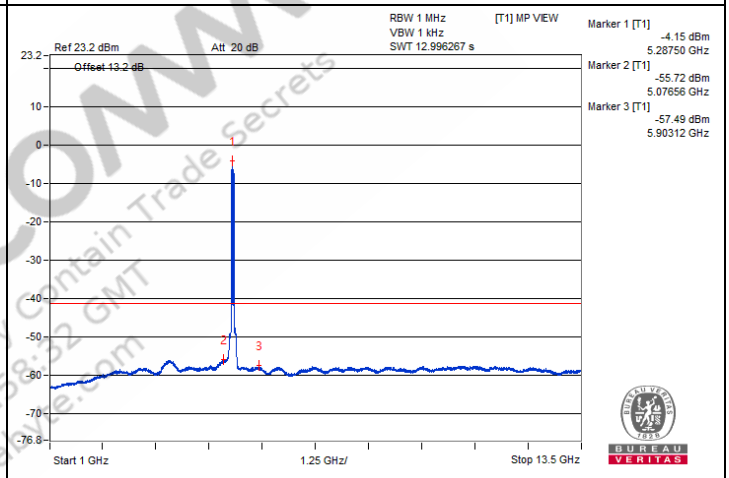

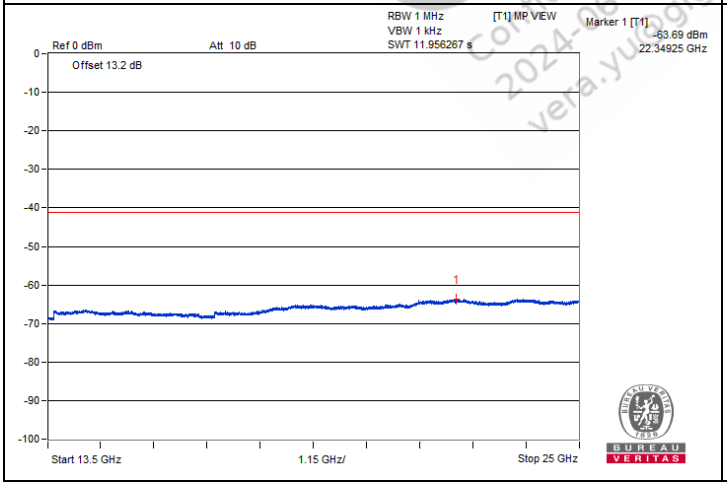

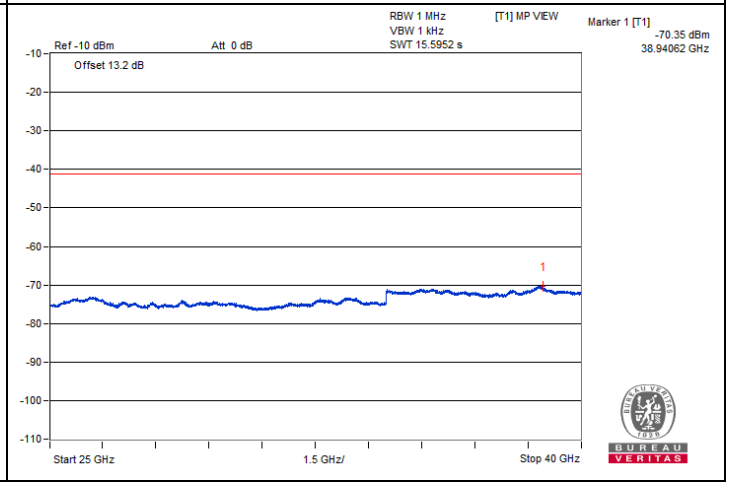

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalane.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5350.5	69.2 PK	74	-4.8	-40.43	-33.25	6.43	-26.06
2	5351.9	52 AV	54	-2	-53.29	-52.18	6.43	-43.26

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

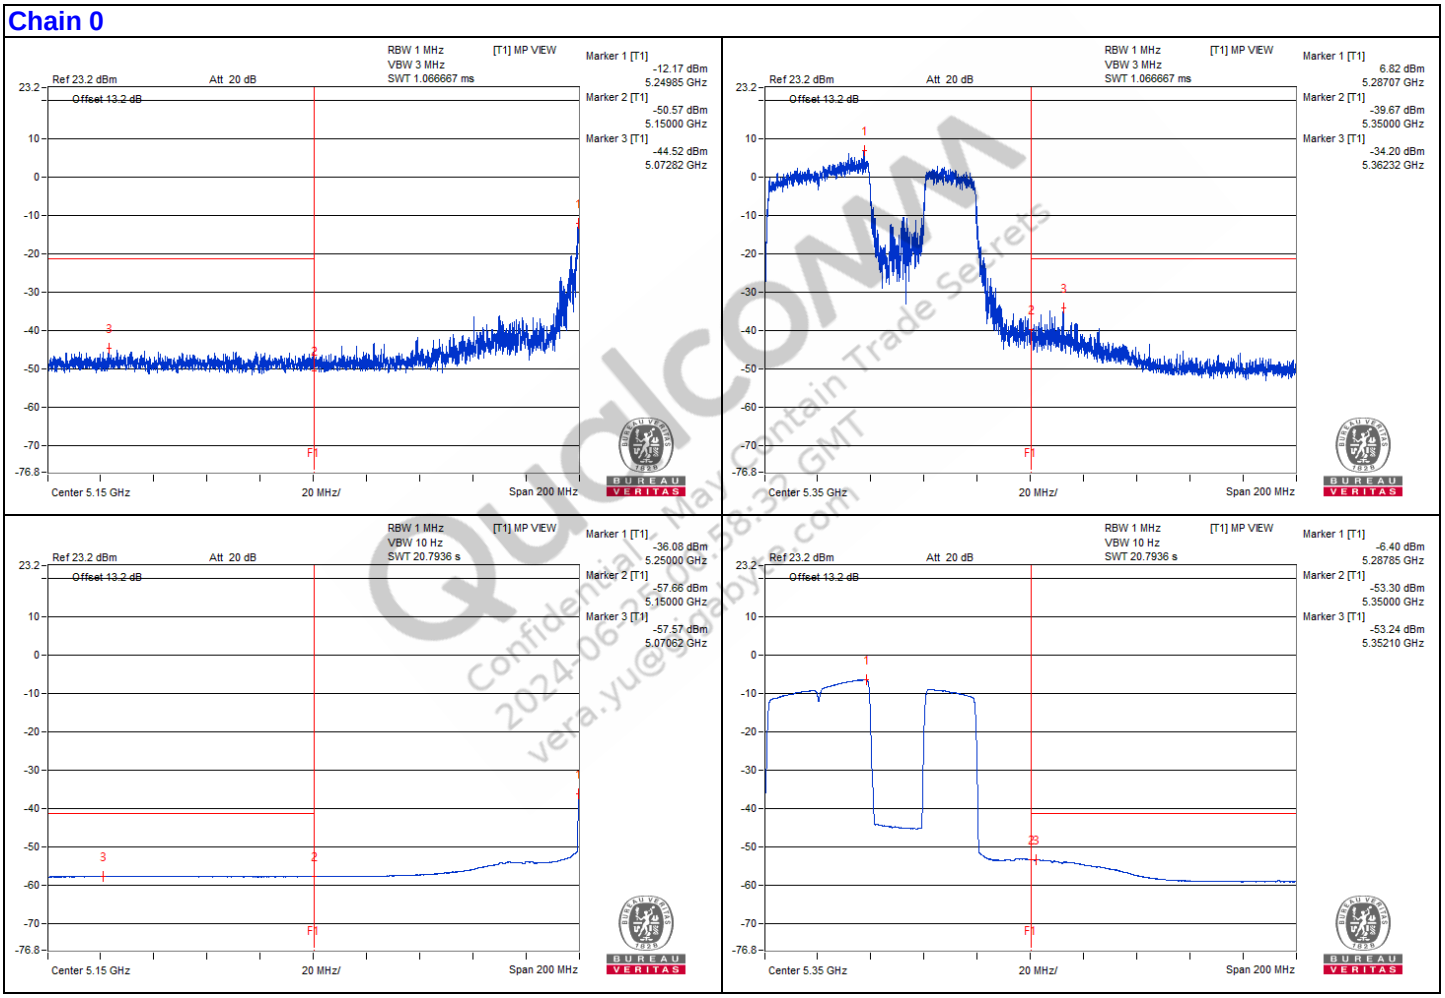



QuadCOM
Confidential - May contain Trade Secrets
2024-06-05 08:39 GMT
vera.yue@sabyte.com

Chain 1

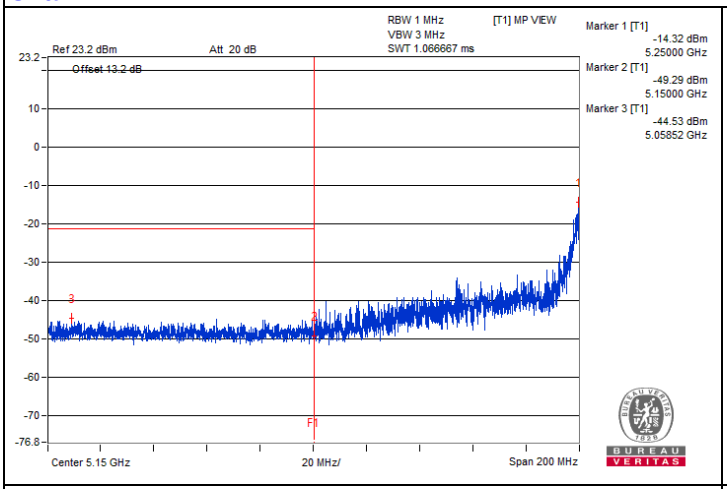

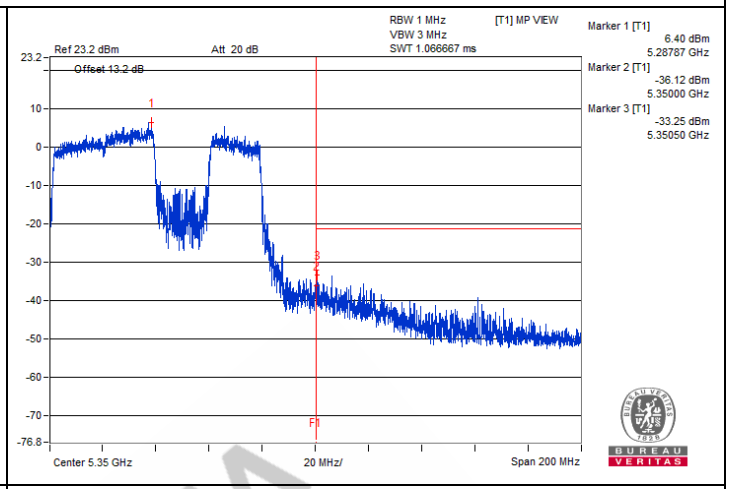

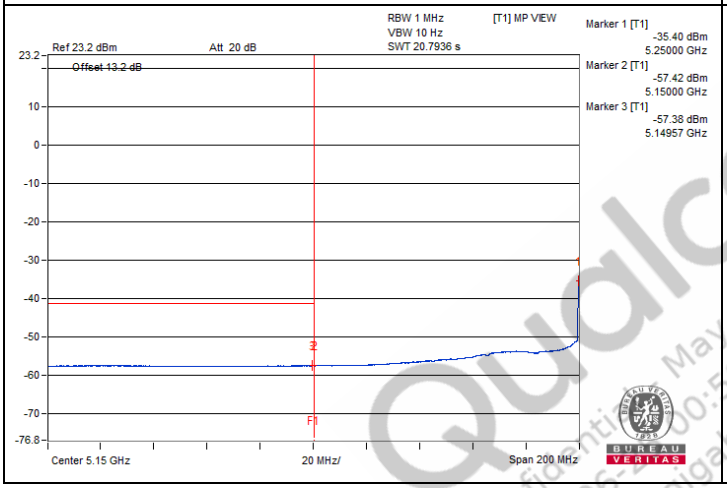

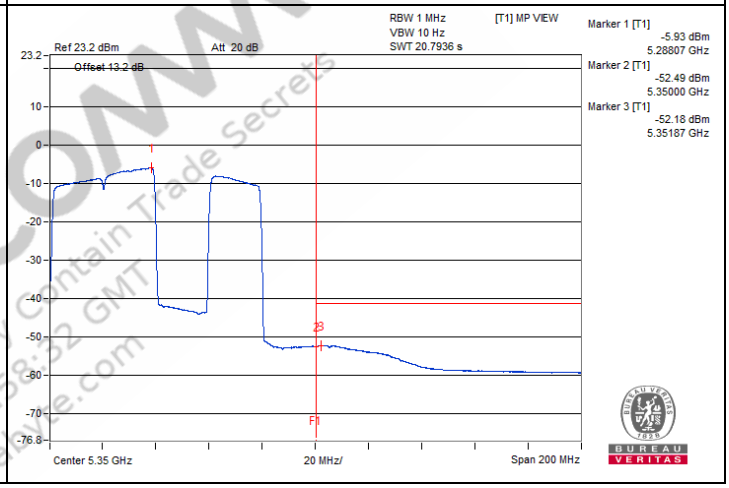

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-21 00:58:32 GMT
vera.yu@gigalane.com

802.11be (EHT80) Punctured by 20 MHz - Channel 138

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3551.56	57.83 PK	74	-16.17	-49.77	-47.7	8.17	-37.43
2	3562.5	47.28 AV	54	-6.72	-59.23	-59.1	8.17	-47.98
3	#7078.12	58.87 PK	68.2	-9.33	-47.47	-47.68	8.17	-36.39
4	10656.25	59.53 PK	74	-14.47	-46.28	-47.65	8.17	-35.73
5	10646.87	48.75 AV	54	-5.25	-57.86	-57.53	8.17	-46.51
6	15953.81	48.2 PK	74	-25.8	-57.97	-58.53	8.17	-47.06
7	15952.37	38.8 AV	54	-15.2	-67.54	-67.74	8.17	-56.46


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

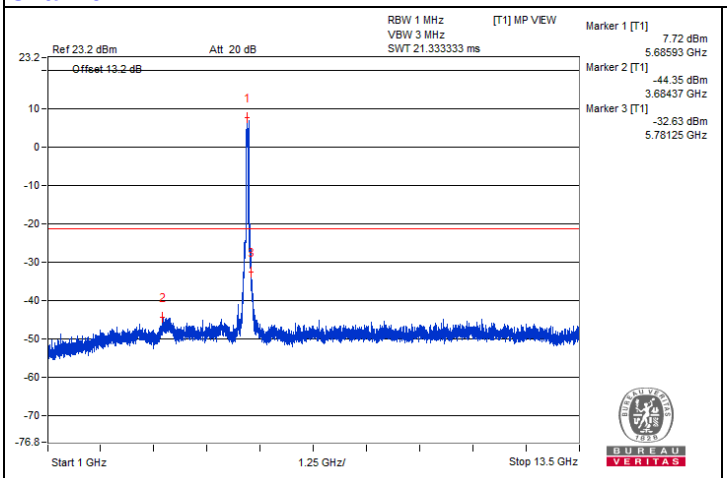


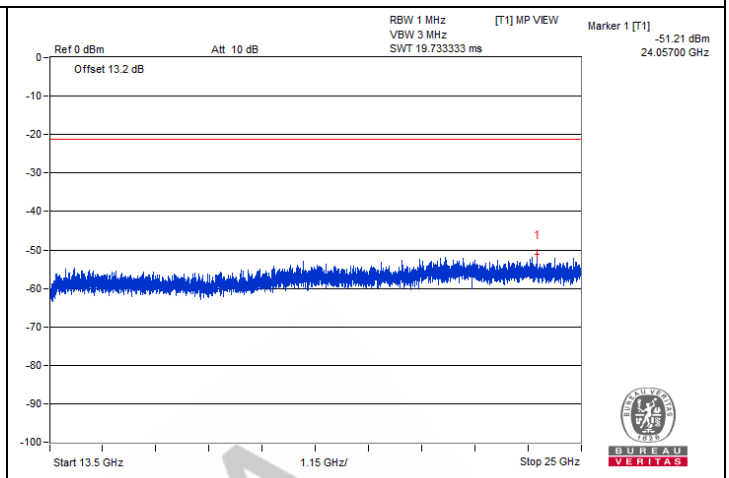

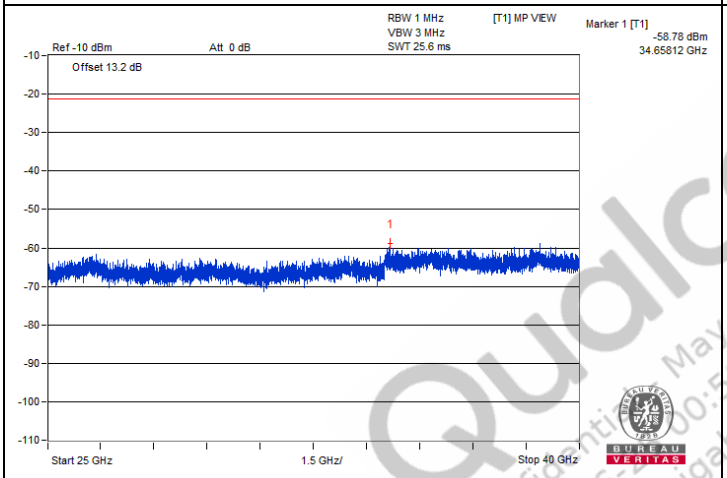

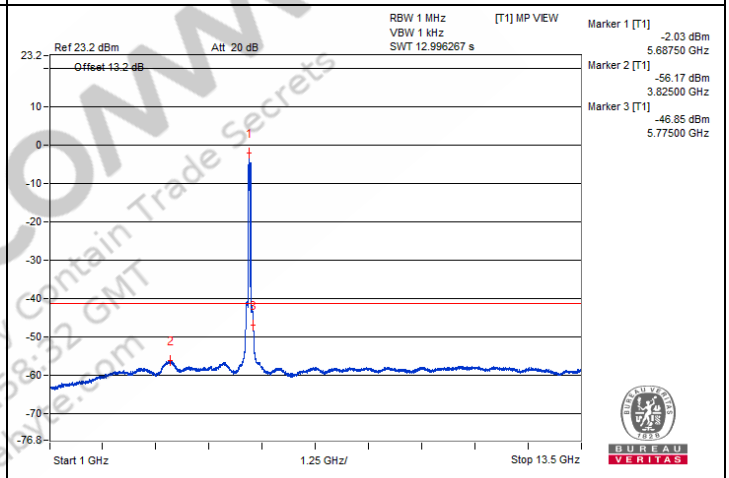


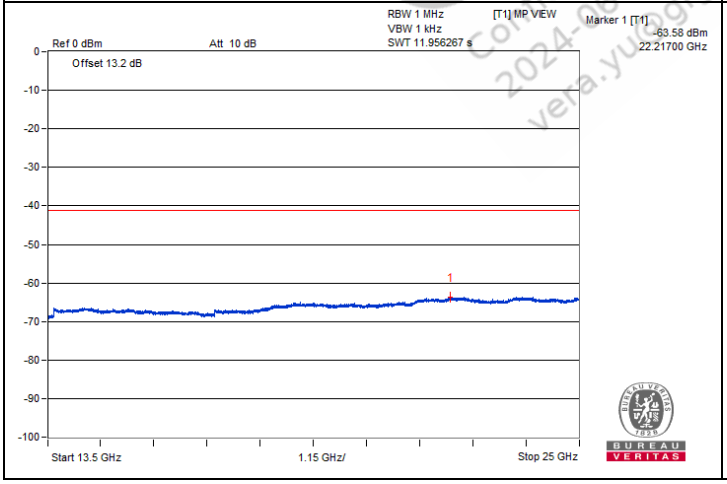


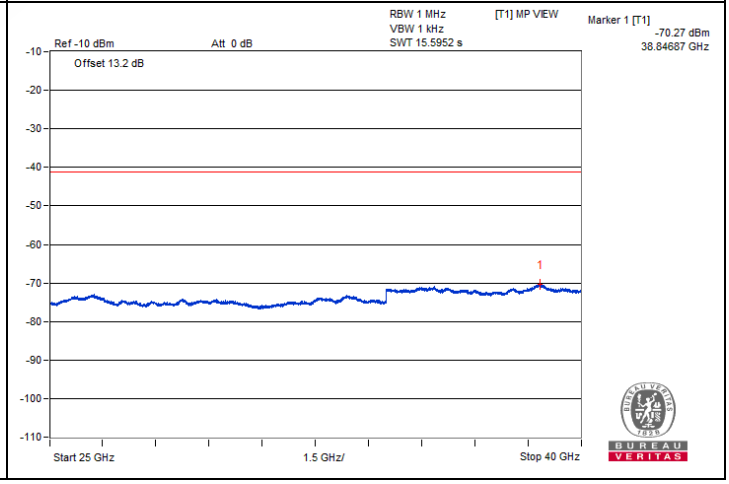



QualcOMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalane.com


Chain 1

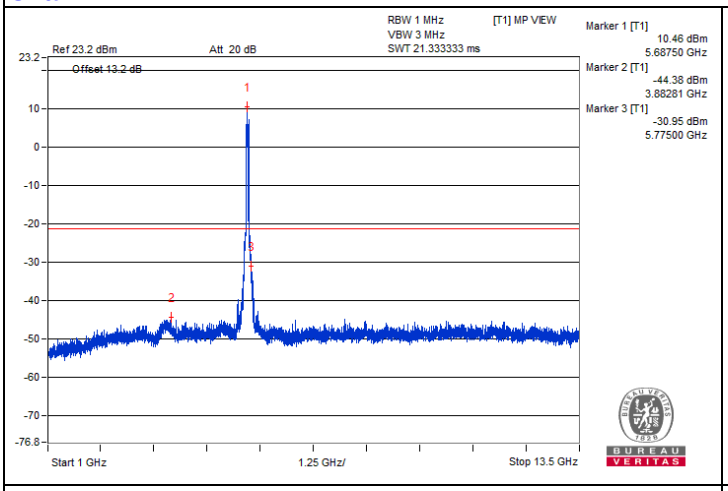


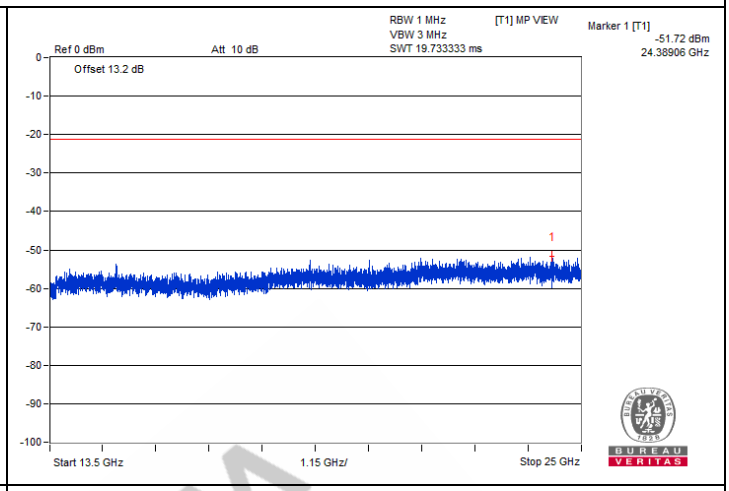

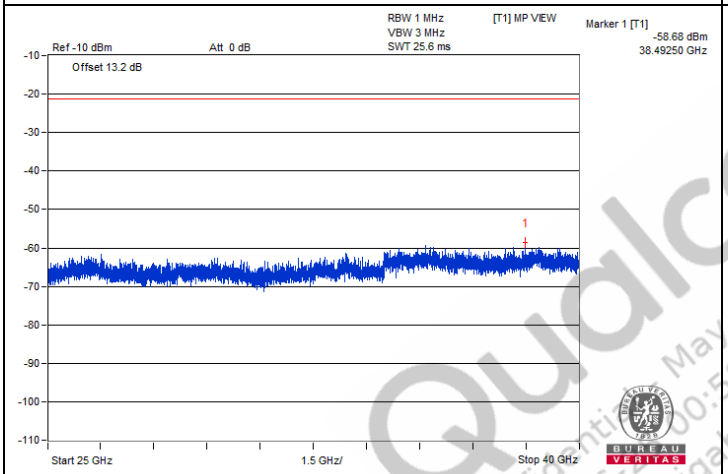

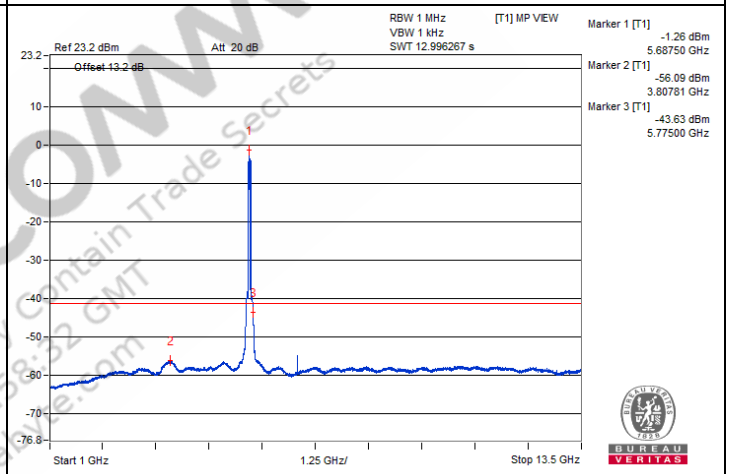

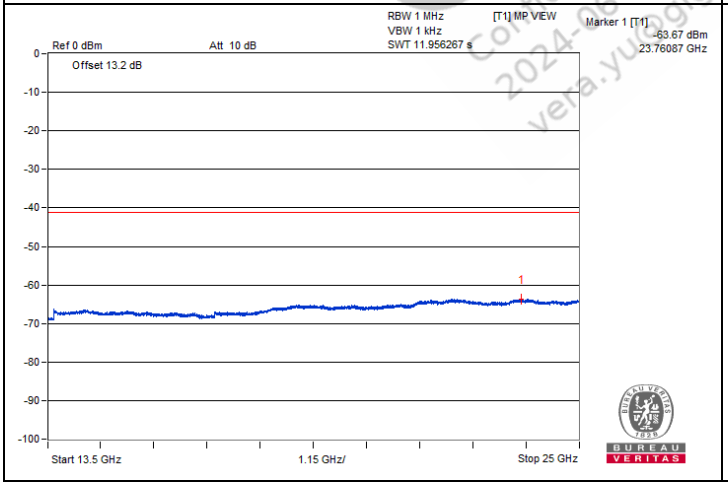

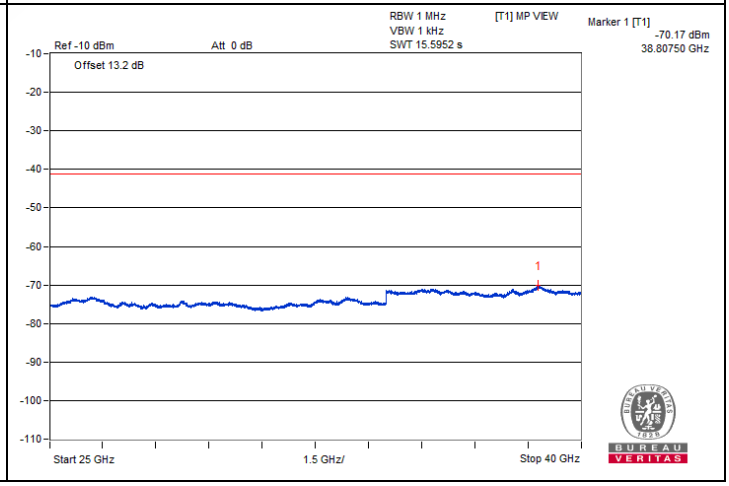

QualComm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalane.com


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5935	63.42 PK	68.2	-4.78	-42.89	-42.47	7.82	-31.84


Remarks:

1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.

Chain 0

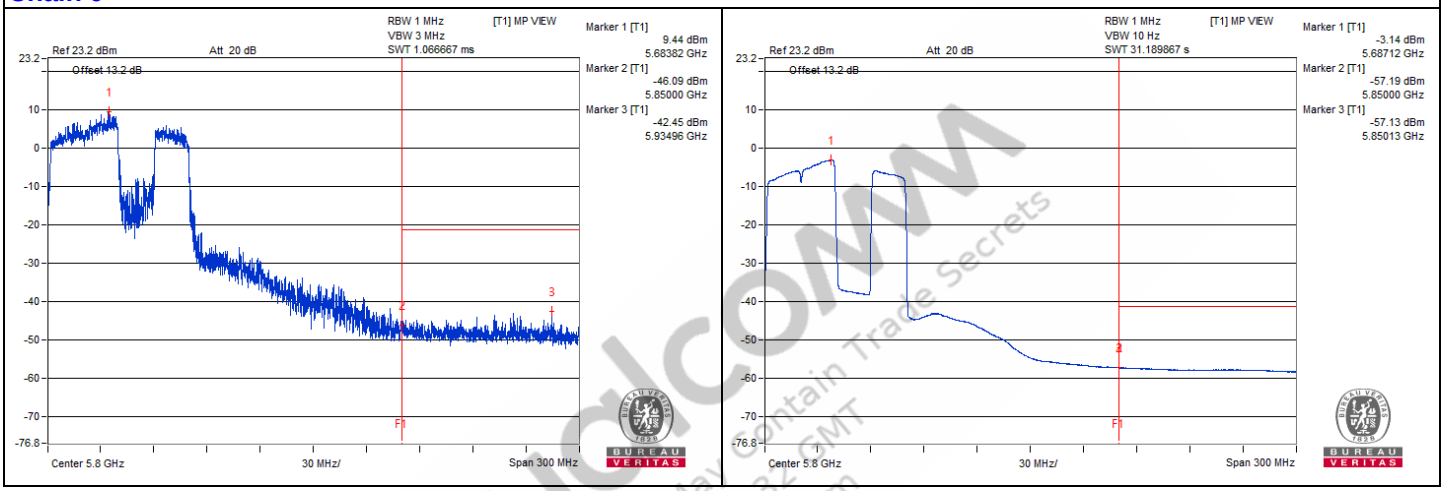

Chain 1

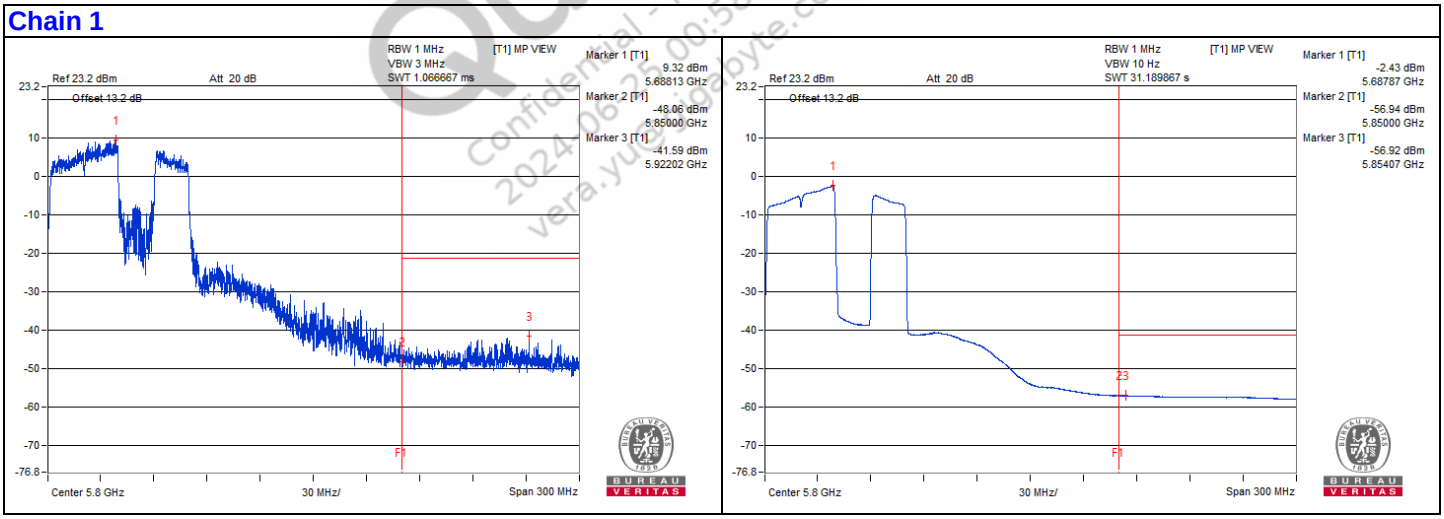

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@bigbyte.com

802.11be (EHT80) Punctured by 20 MHz - Channel 155

Conducted spurious emission table


No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	3559.37	58.52 PK	74	-15.48	-48.96	-47.09	8.17	-36.74
2	3554.68	47.29 AV	54	-6.71	-59.28	-59.03	8.17	-47.97
3	#7090.62	58.92 PK	68.2	-9.28	-46.88	-48.28	8.17	-36.34
4	10623.43	59.96 PK	74	-14.04	-47.24	-45.83	8.17	-35.30
5	10642.18	48.78 AV	54	-5.22	-57.81	-57.51	8.17	-46.48
6	15943.75	49.18 PK	74	-24.82	-56.45	-58.25	8.17	-46.08
7	15962.43	38.74 AV	54	-15.26	-67.53	-67.87	8.17	-56.52


Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com


Chain 0

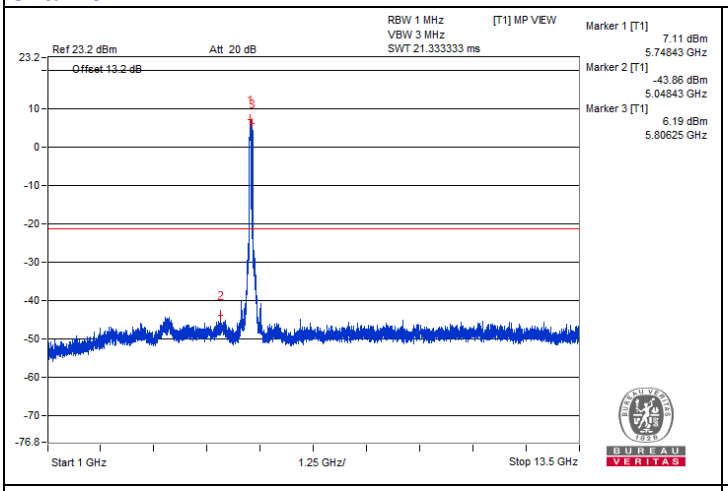


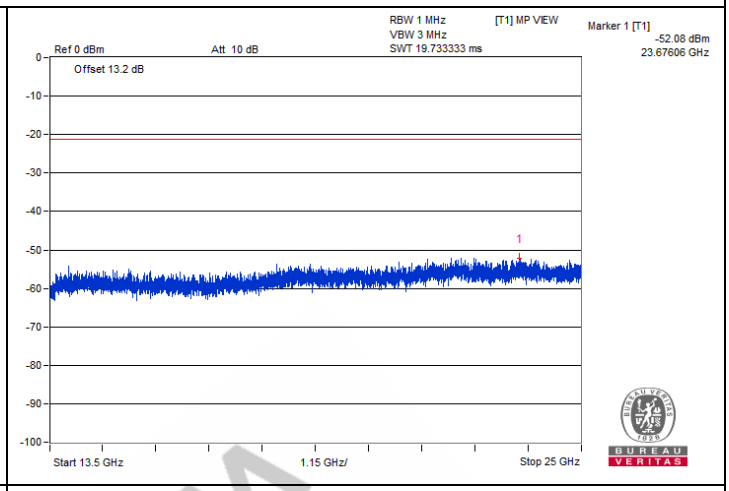

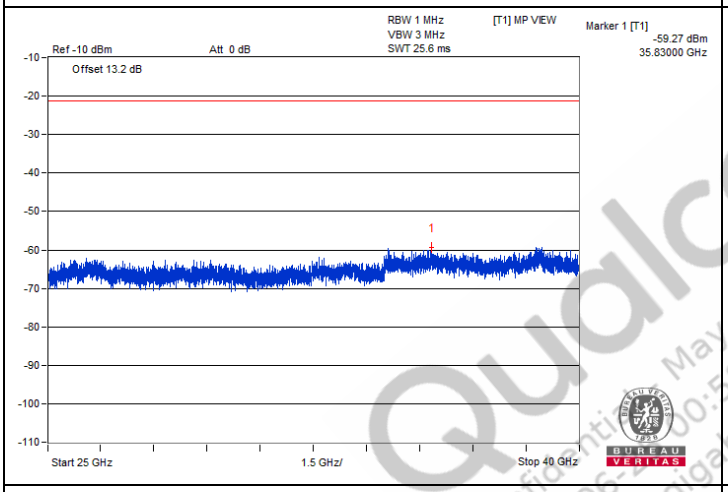

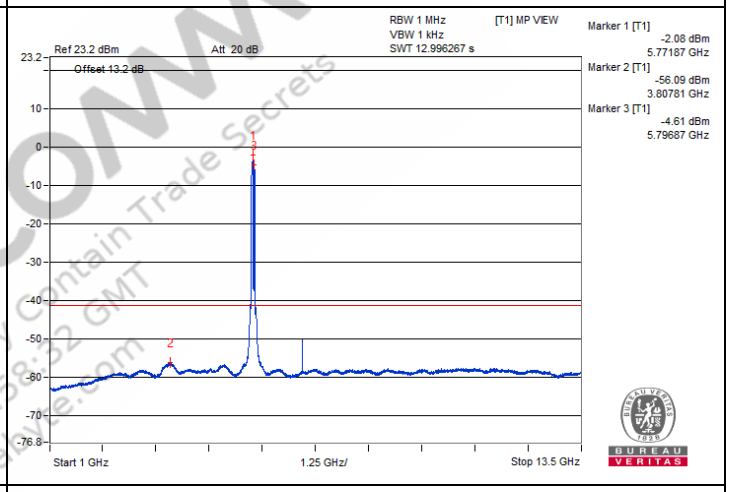


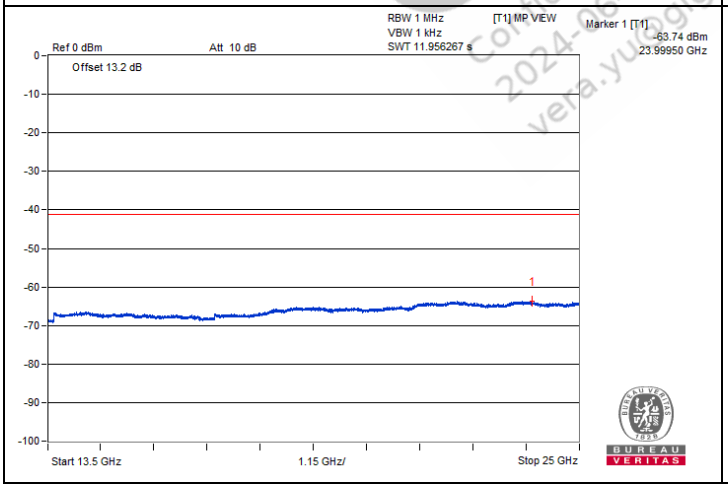


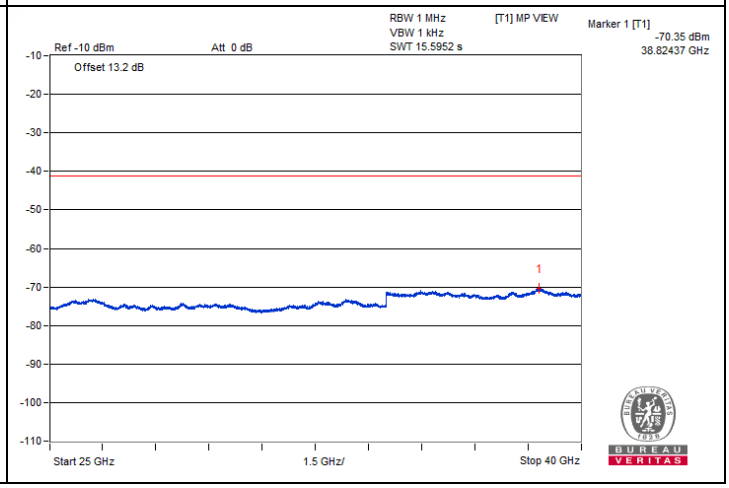



Qualcomm
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalane.com


Chain 1

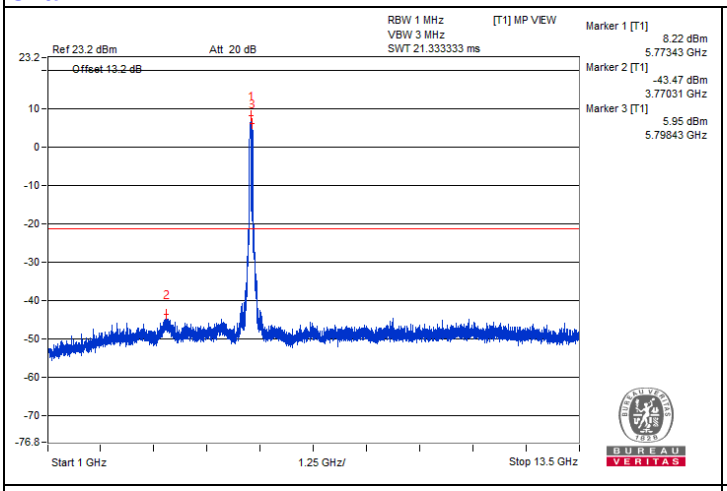


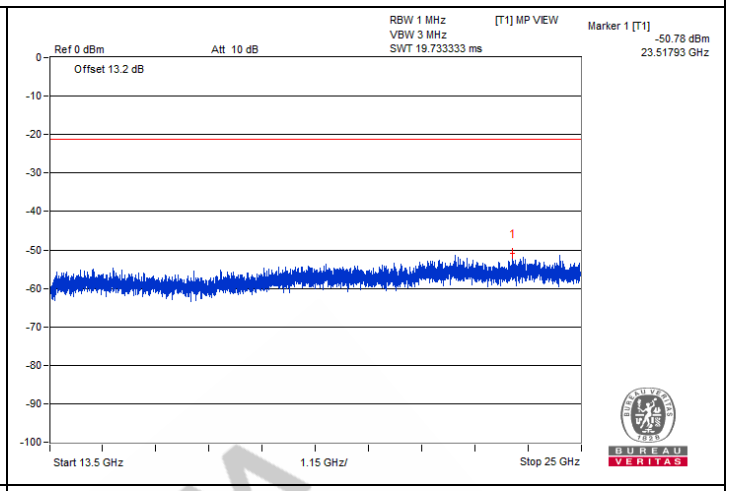

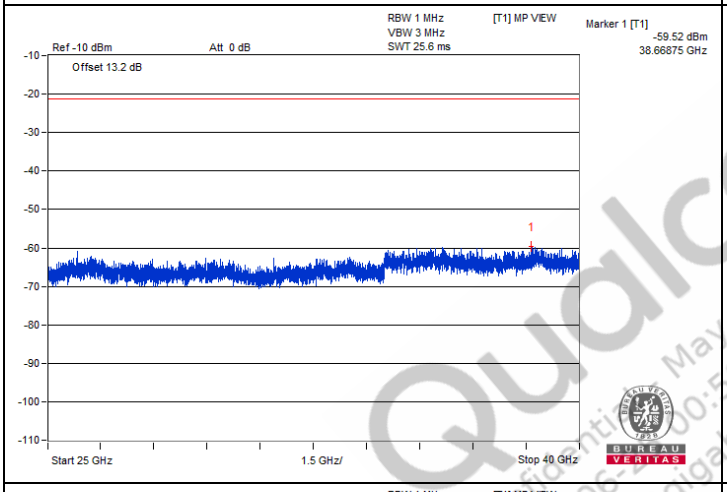

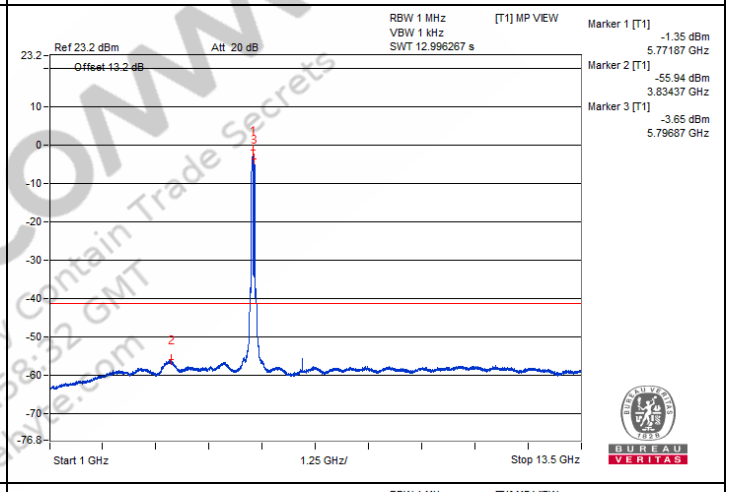

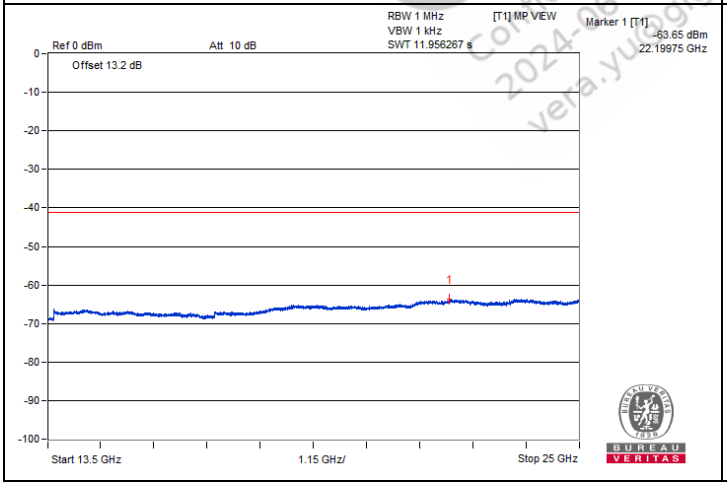


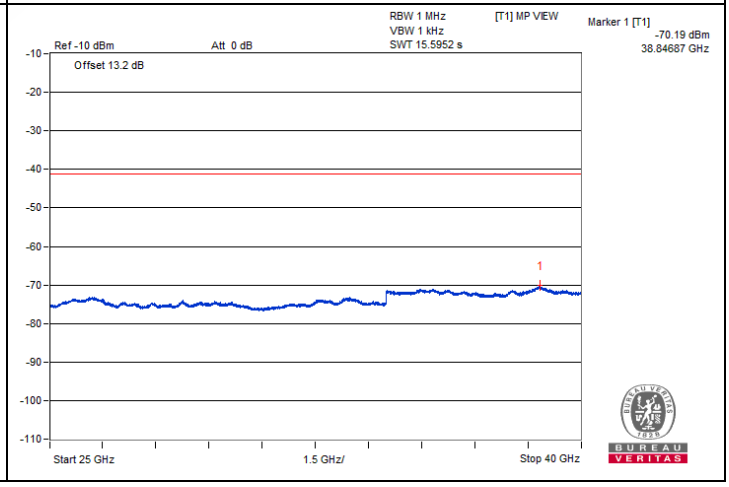

QualcOMM
Confidential - May Contain Trade Secrets
2024-06-20 00:58:32 GMT
vera.yu@gigalane.com


Bandedge table

Chain 0

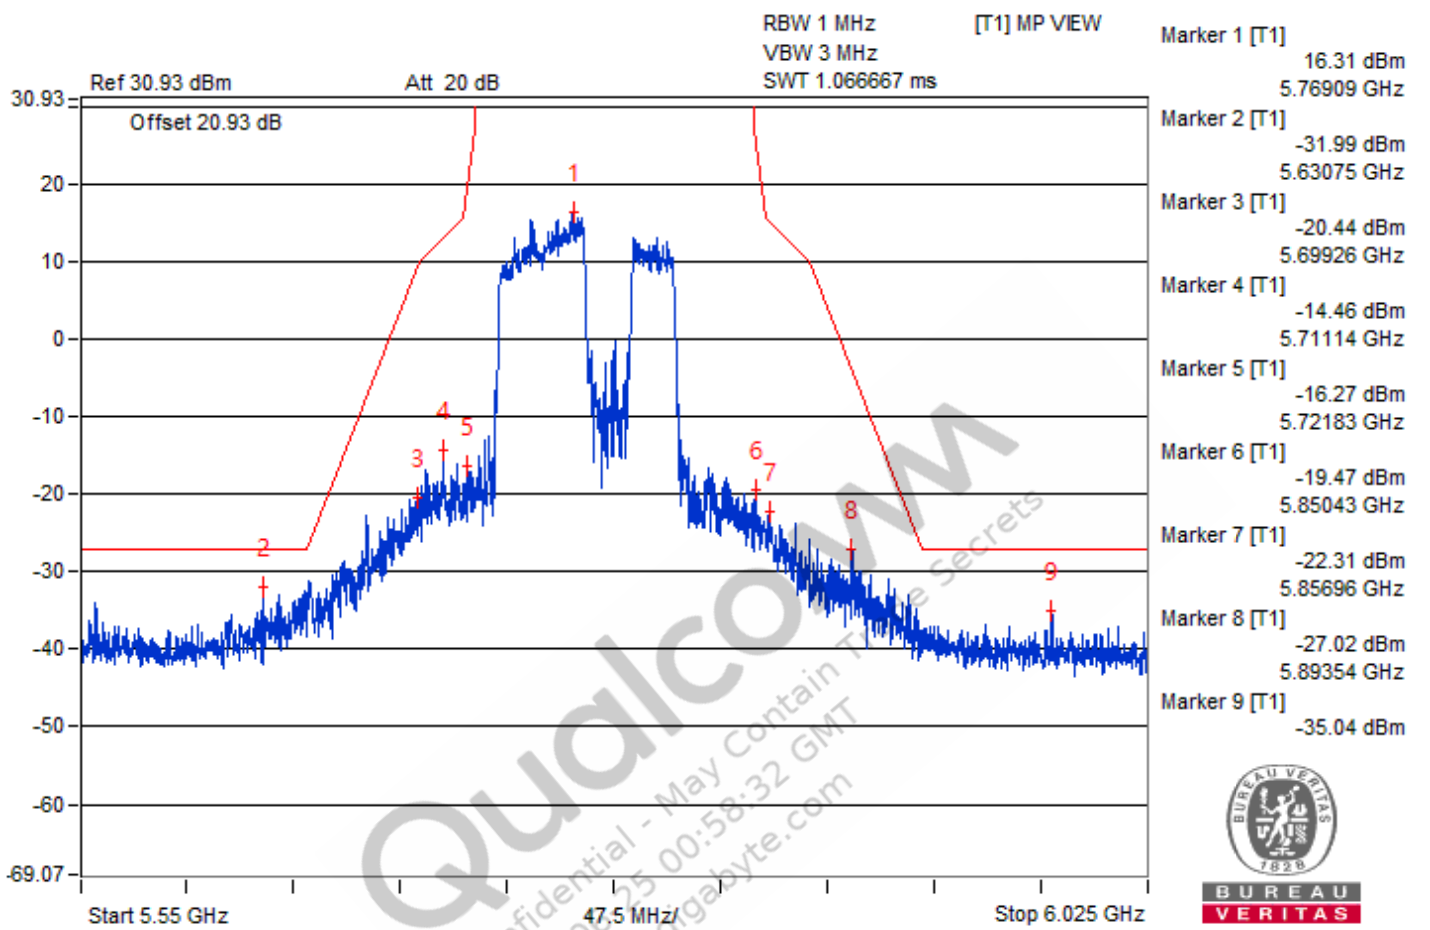

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

Chain 1

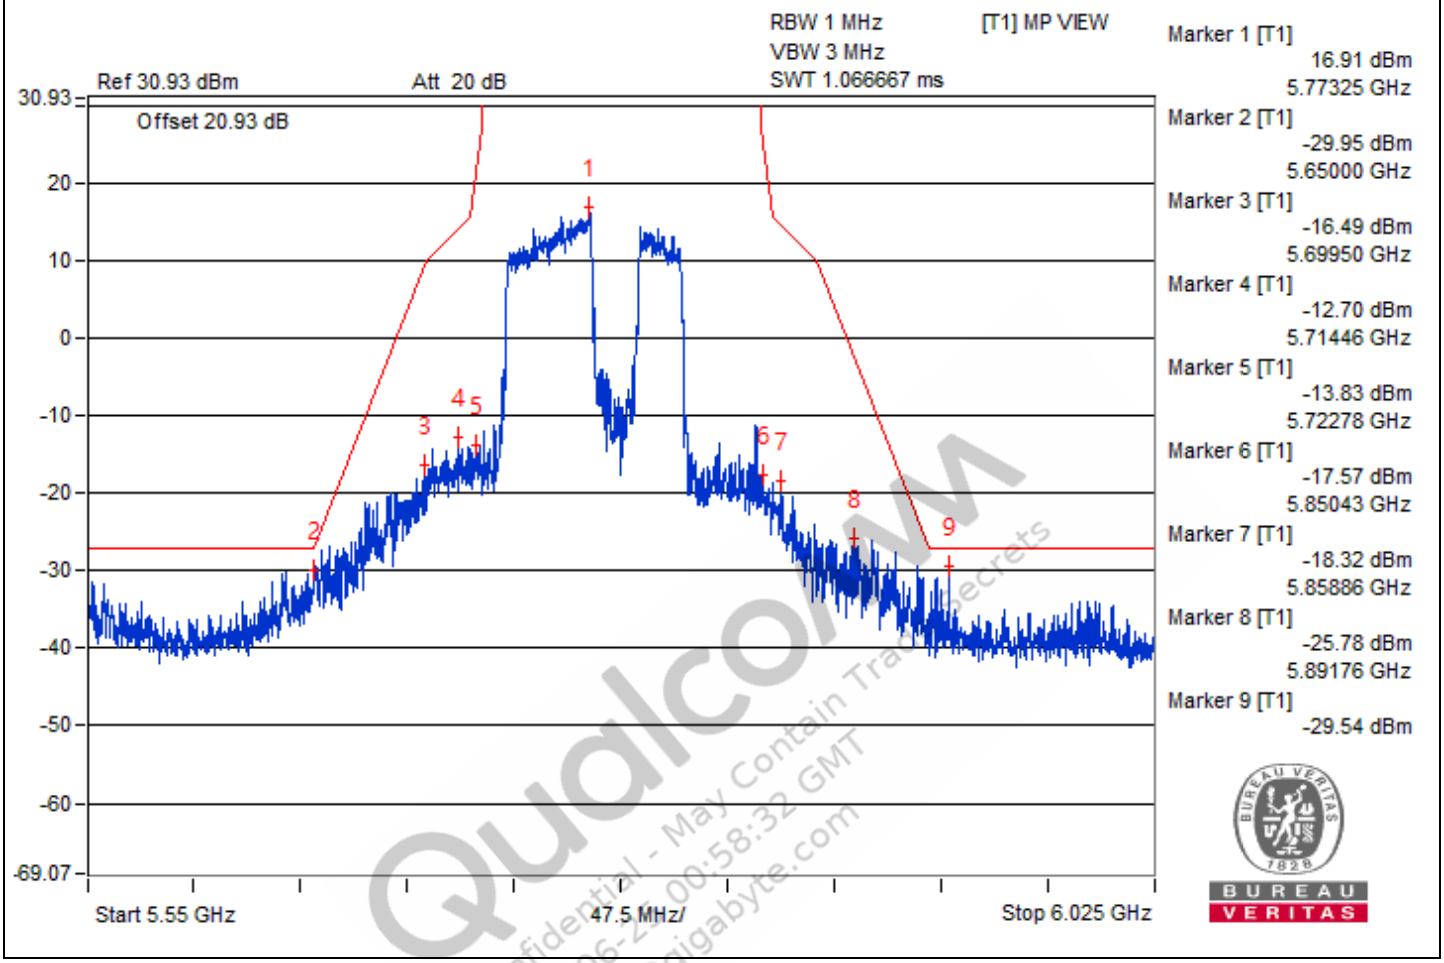

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-27 00:58:32 GMT
vera.yu@gigabyte.com

802.11be (EHT160) Punctured by 40 MHz - Channel 50


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	5113.97	72.47 PK	74	-1.53	-47.46	-29.29	6.43	-22.79
2	5081.07	49.25 AV	54	-4.75	-56.09	-54.89	6.43	-46.01

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.


Chain 0

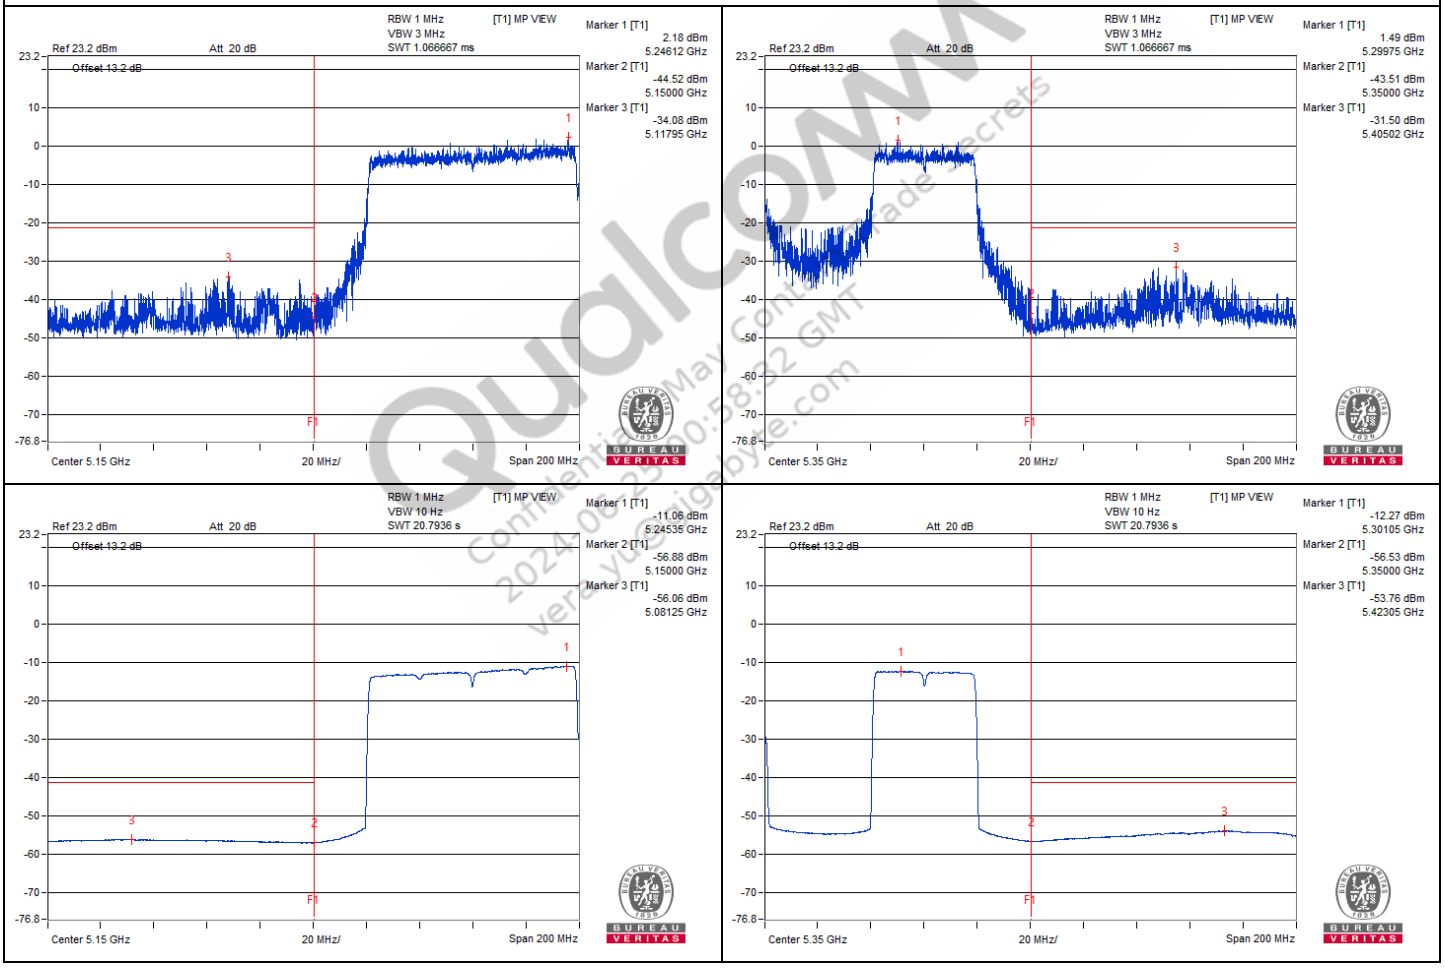



Qualcomm Confidential and Proprietary – May Contain Trade Secrets
2024-06-25 20:58:32 GMT
version@qualcomm.com

Chain 1

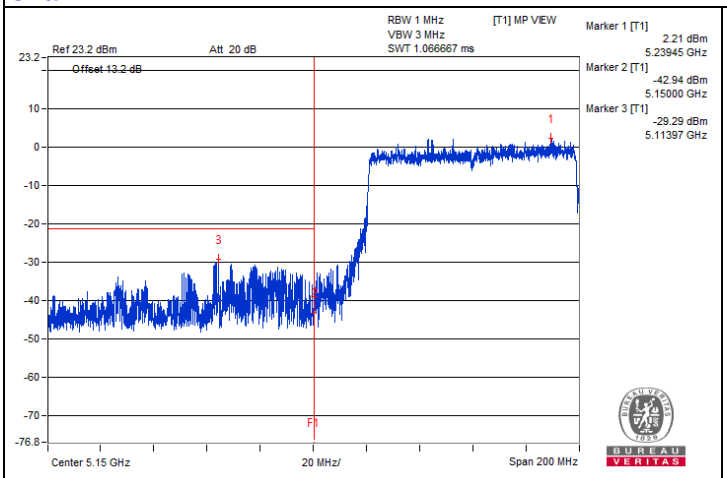

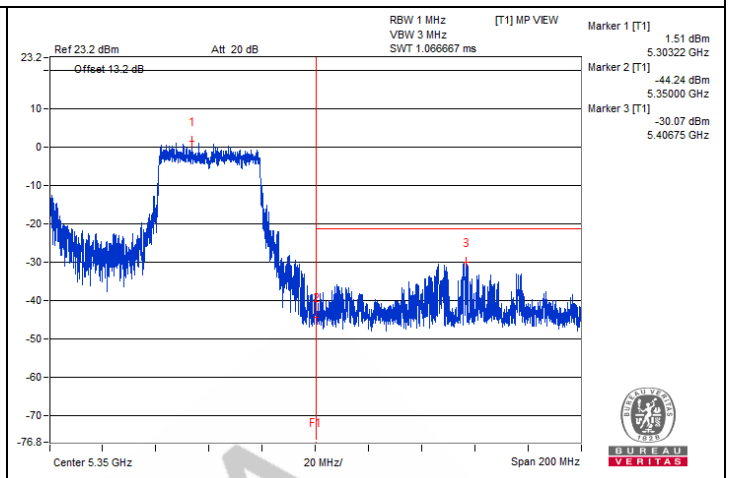

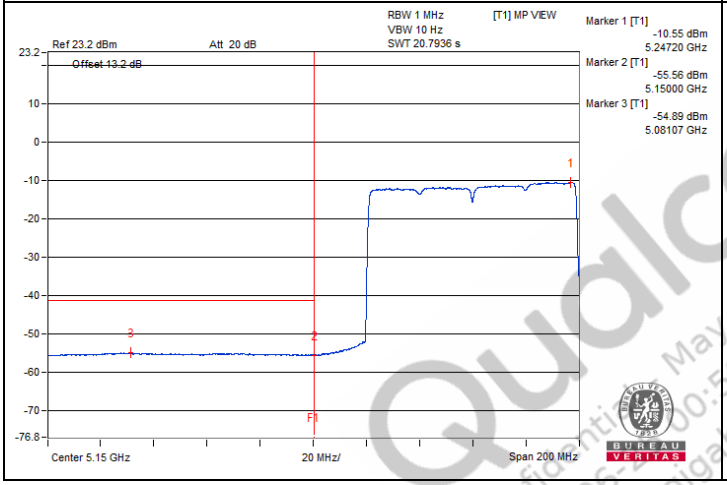

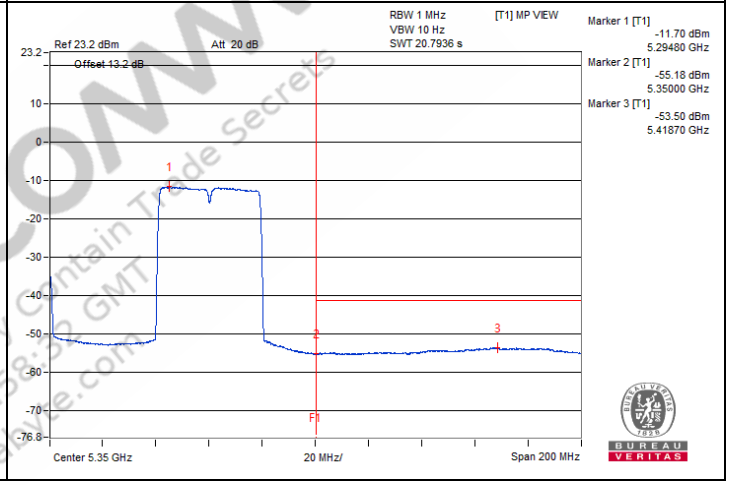

QualComm
Confidential | May Contain Trade Secrets
2024-06-21 00:58:32 GMT
vera.yu@gigalane.com

802.11be (EHT160) Punctured by 40 MHz - Channel 114


Bandedge table

No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBm)		Correction Factor (dB)	EIRP Level (dBm)
					Chain0	Chain1		
1	#5460.93	67.34 PK	68.2	-0.86	-45.12	-36.27	7.82	-27.92

Remarks:


1. Margin value = Emission Level – Limit value
2. The other emission levels were very low against the limit.
3. " # " : The frequency is out of the restricted band.


Chain 0

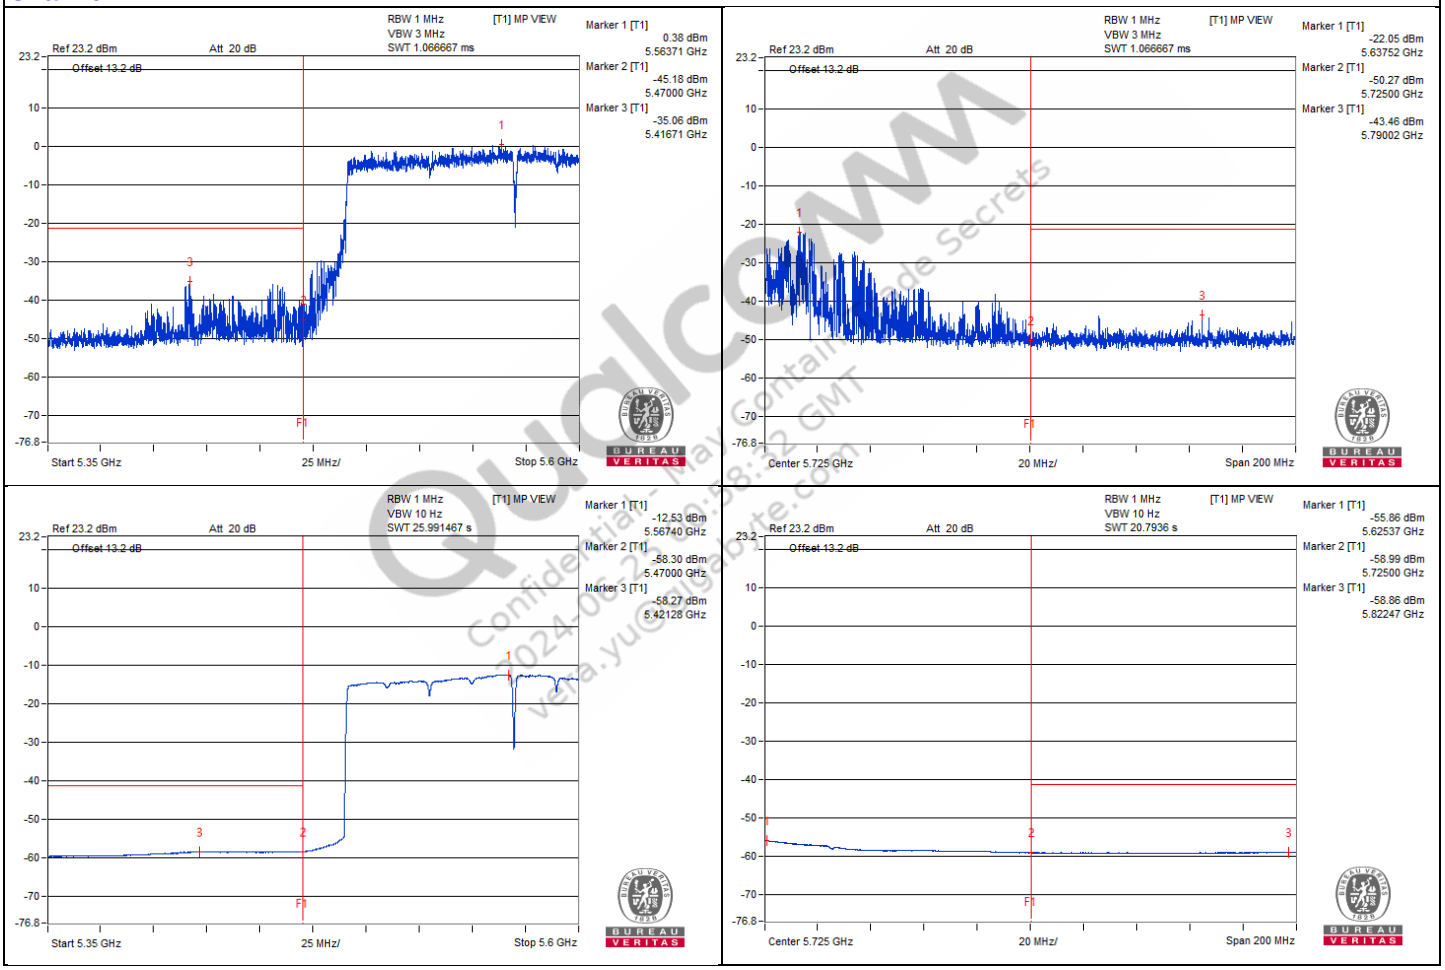



Qualcomm
Confidential – May Contain Trade Secrets
2024-06-27 20:08:12 GMT
vera.yu@cesbv.com

Chain 1

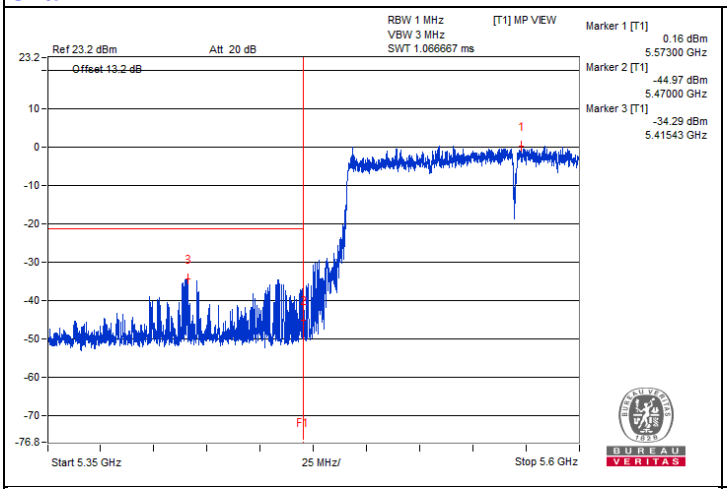

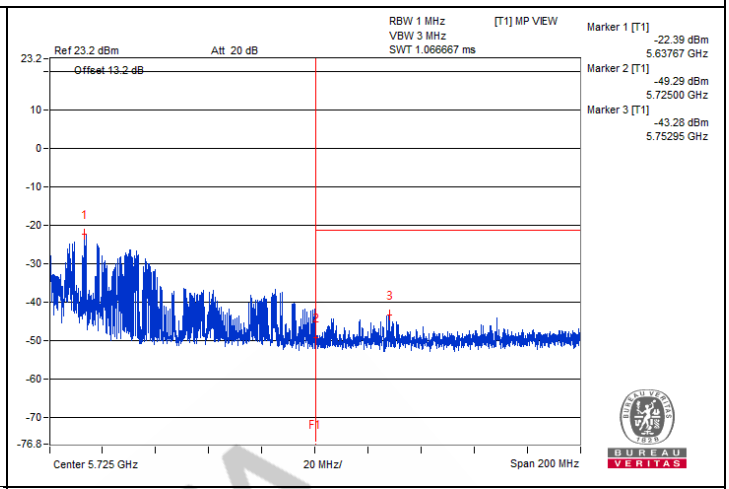

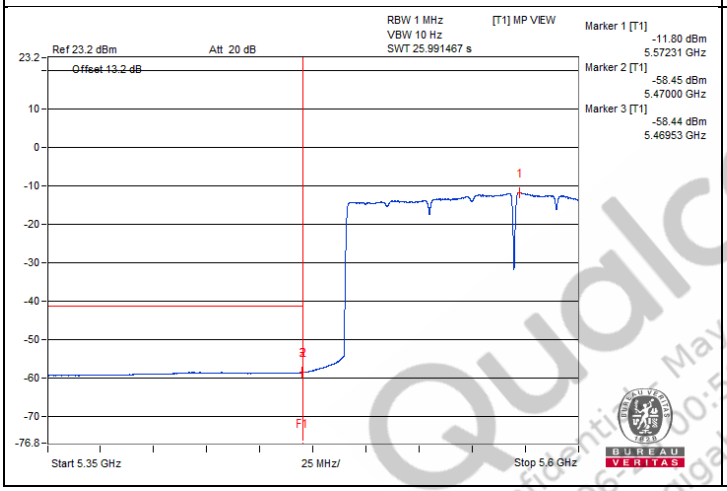

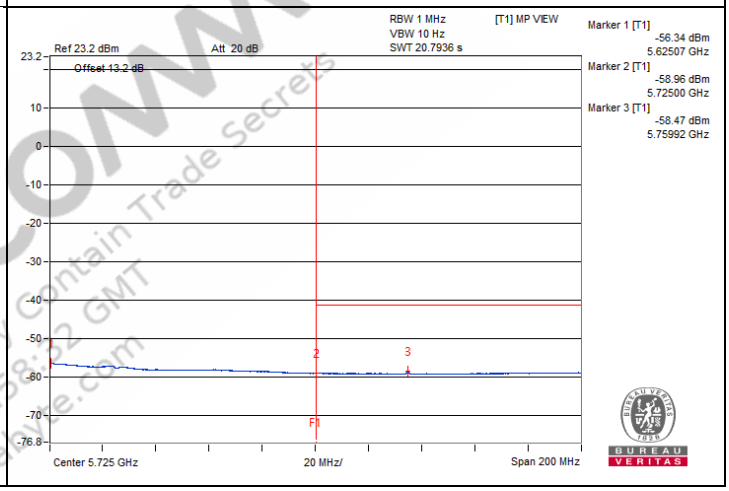

QualcOMM
Confidential - May Contain Trade Secrets
2024-06-[illegible] 00:58:32 GMT
vera.yu@gigalane.com


Mode B

RF Mode	802.11a	Channel	CH 36：5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	46.0 PK	68.2	-22.2	1.06 H	199	34.4	11.6
2	15540.00	45.7 PK	74.0	-28.3	1.25 H	214	33.9	11.8
3	15540.00	34.2 AV	54.0	-19.8	1.25 H	214	22.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

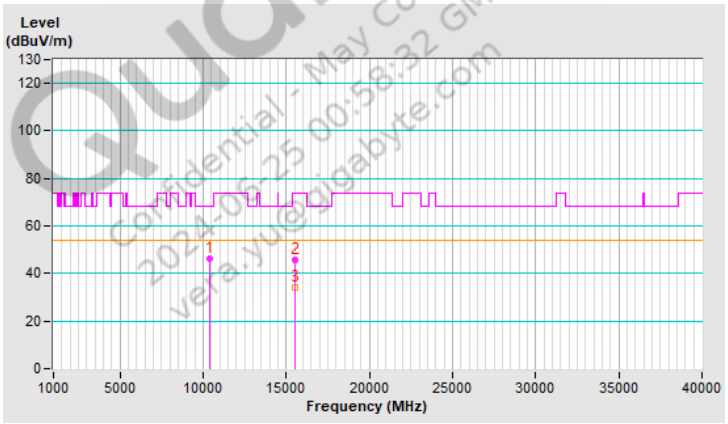


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11a	Channel	CH 36：5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	46.2 PK	68.2	-22.0	1.13 V	169	34.6	11.6
2	15540.00	46.0 PK	74.0	-28.0	1.14 V	165	34.2	11.8
3	15540.00	34.5 AV	54.0	-19.5	1.14 V	165	22.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

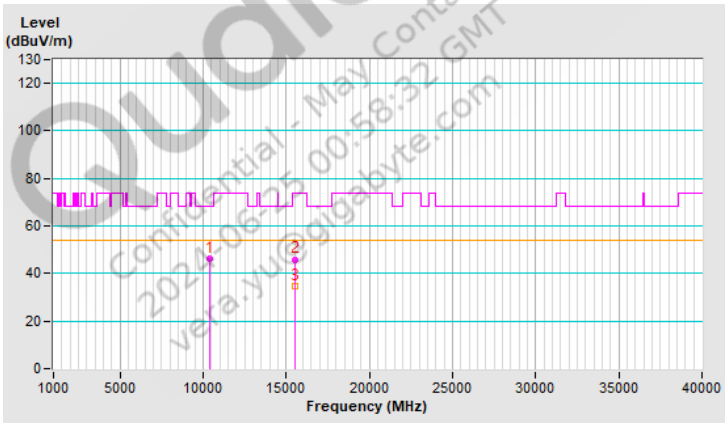


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	**Channel**	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10400.00	46.1 PK	68.2	-22.1	1.06 H	208	34.3	11.8
2	15600.00	46.4 PK	74.0	-27.6	1.24 H	212	34.7	11.7
3	15600.00	35.0 AV	54.0	-19.0	1.24 H	212	23.3	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

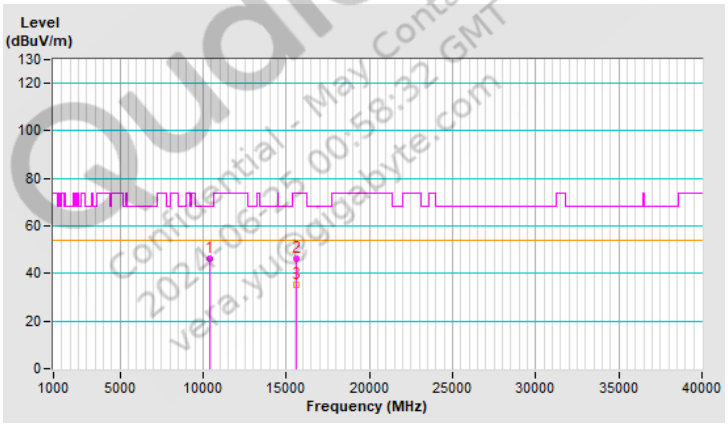


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	Channel	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	46.2 PK	68.2	-22.0	1.12 V	184	34.4	11.8
2	15600.00	45.7 PK	74.0	-28.3	1.14 V	170	34.0	11.7
3	15600.00	34.2 AV	54.0	-19.8	1.14 V	170	22.5	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

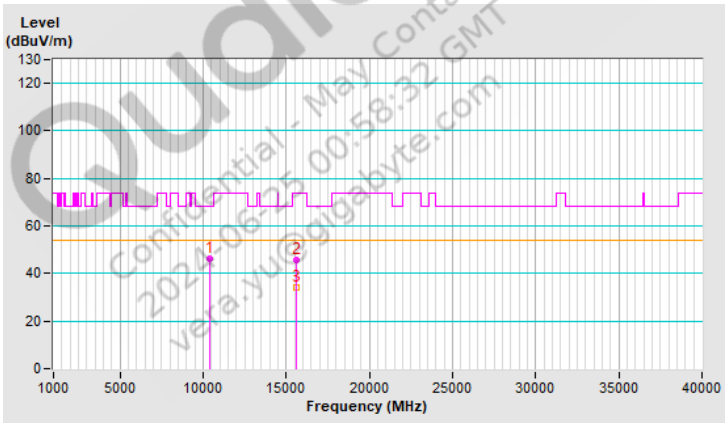


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	**Channel**	CH 48：5240 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10480.00	45.6 PK	68.2	-22.6	1.04 H	207	33.8	11.8
2	15720.00	46.3 PK	74.0	-27.7	1.27 H	211	34.7	11.6
3	15720.00	34.7 AV	54.0	-19.3	1.27 H	211	23.1	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

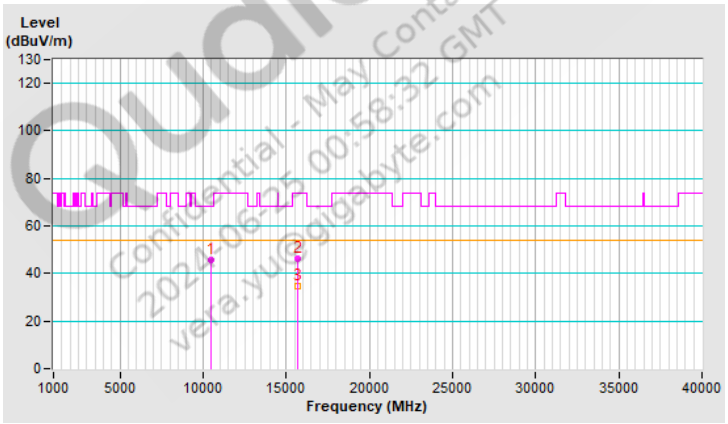


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	**Channel**	CH 48：5240 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10480.00	45.7 PK	68.2	-22.5	1.12 V	171	33.9	11.8
2	15720.00	46.6 PK	74.0	-27.4	1.12 V	147	35.0	11.6
3	15720.00	35.0 AV	54.0	-19.0	1.12 V	147	23.4	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

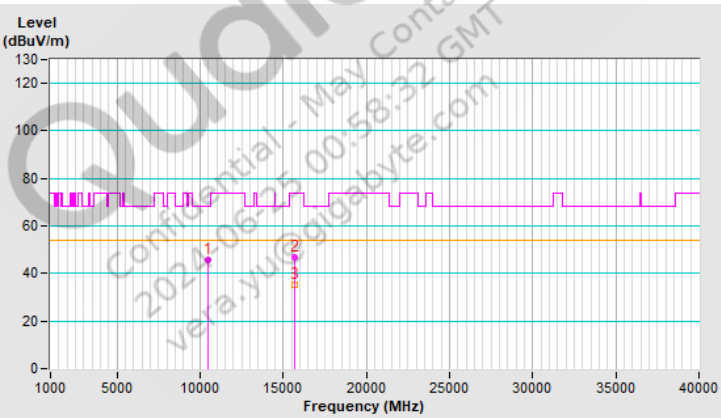


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	Channel	CH 52：5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	46.1 PK	68.2	-22.1	1.06 H	211	34.4	11.7
2	15780.00	45.5 PK	74.0	-28.5	1.24 H	192	34.2	11.3
3	15780.00	34.1 AV	54.0	-19.9	1.24 H	192	22.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

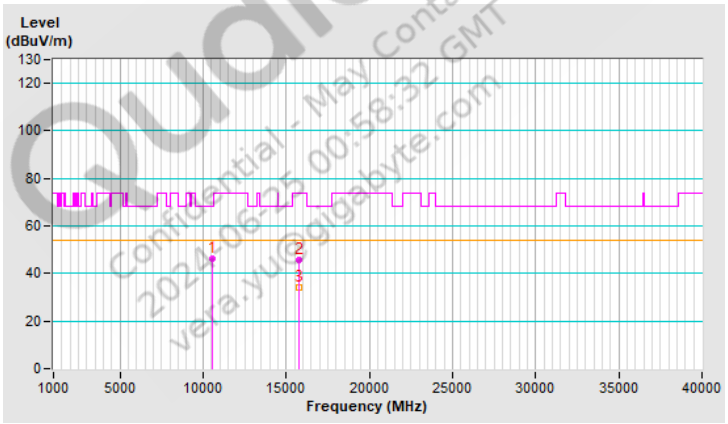


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	**Channel**	CH 52：5260 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10520.00	46.4 PK	68.2	-21.8	1.14 V	177	34.7	11.7
2	15780.00	46.2 PK	74.0	-27.8	1.10 V	175	34.9	11.3
3	15780.00	34.7 AV	54.0	-19.3	1.10 V	175	23.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

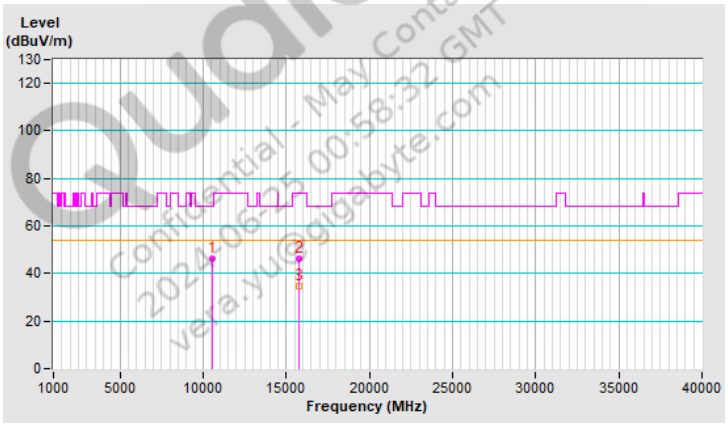


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	Channel	CH 60：5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	46.9 PK	74.0	-27.1	1.10 H	212	35.2	11.7
2	10600.00	36.0 AV	54.0	-18.0	1.10 H	212	24.3	11.7
3	15900.00	46.1 PK	74.0	-27.9	1.21 H	188	35.1	11.0
4	15900.00	34.4 AV	54.0	-19.6	1.21 H	188	23.4	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

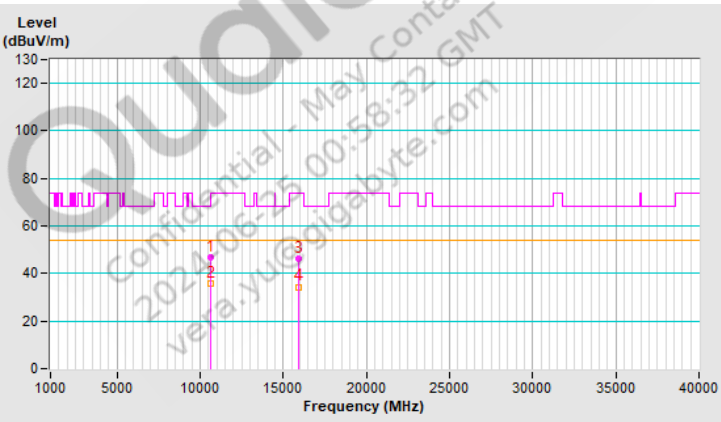


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11a	Channel	CH 60：5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	46.4 PK	74.0	-27.6	1.06 V	180	34.7	11.7
2	10600.00	35.9 AV	54.0	-18.1	1.06 V	180	24.2	11.7
3	15900.00	45.2 PK	74.0	-28.8	1.09 V	174	34.2	11.0
4	15900.00	34.0 AV	54.0	-20.0	1.09 V	174	23.0	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

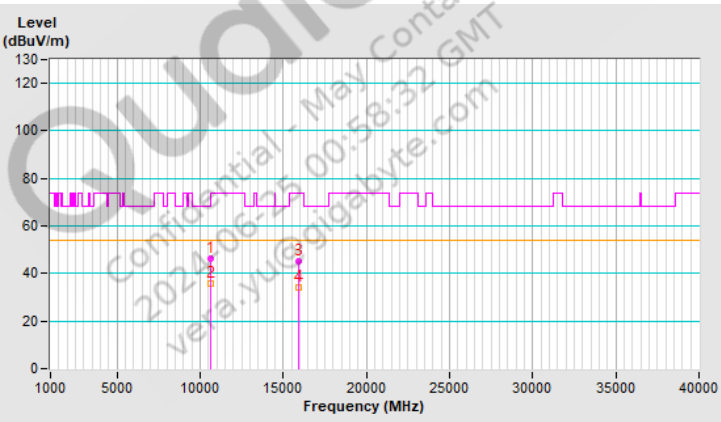


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	Channel	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	45.8 PK	74.0	-28.2	1.08 H	204	34.1	11.7
2	10640.00	35.4 AV	54.0	-18.6	1.08 H	204	23.7	11.7
3	15960.00	45.5 PK	74.0	-28.5	1.25 H	203	34.2	11.3
4	15960.00	34.3 AV	54.0	-19.7	1.25 H	203	23.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

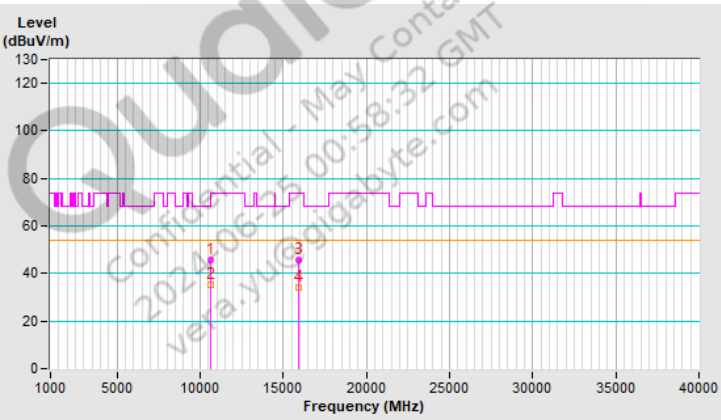


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11a	Channel	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	45.7 PK	74.0	-28.3	1.09 V	174	34.0	11.7
2	10640.00	35.3 AV	54.0	-18.7	1.09 V	174	23.6	11.7
3	15960.00	45.4 PK	74.0	-28.6	1.09 V	161	34.1	11.3
4	15960.00	34.1 AV	54.0	-19.9	1.09 V	161	22.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

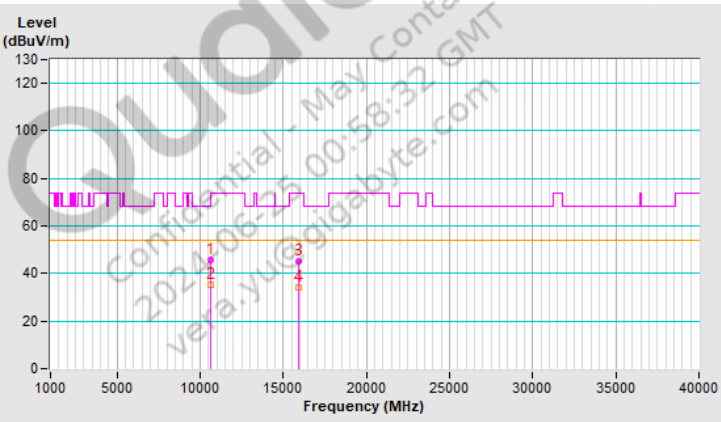


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	**Channel**	CH 100：5500 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11000.00	46.5 PK	74.0	-27.5	1.12 H	192	34.1	12.4
2	11000.00	35.6 AV	54.0	-18.4	1.12 H	192	23.2	12.4
3	#16500.00	45.8 PK	68.2	-22.4	1.19 H	187	32.1	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

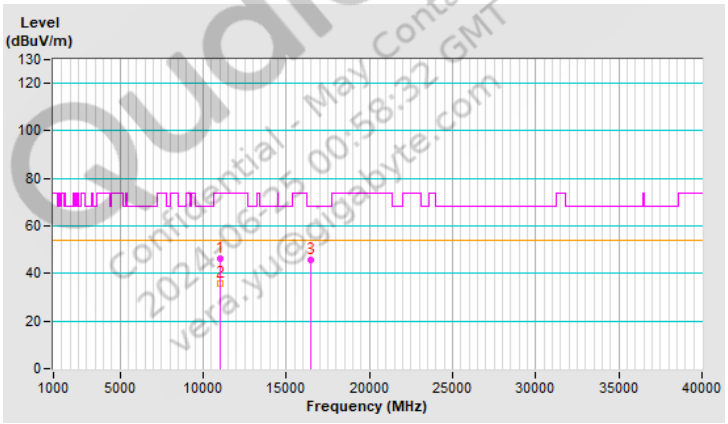


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	**Channel**	CH 100：5500 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11000.00	46.5 PK	74.0	-27.5	1.11 V	180	34.1	12.4
2	11000.00	35.6 AV	54.0	-18.4	1.11 V	180	23.2	12.4
3	#16500.00	46.0 PK	68.2	-22.2	1.09 V	154	32.3	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

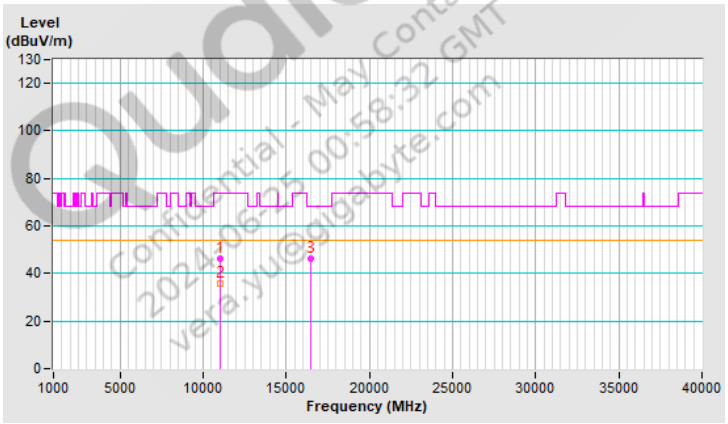


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	**Channel**	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11160.00	46.2 PK	74.0	-27.8	1.02 H	197	34.2	12.0
2	11160.00	35.4 AV	54.0	-18.6	1.02 H	197	23.4	12.0
3	#16740.00	46.1 PK	68.2	-22.1	1.23 H	206	30.9	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

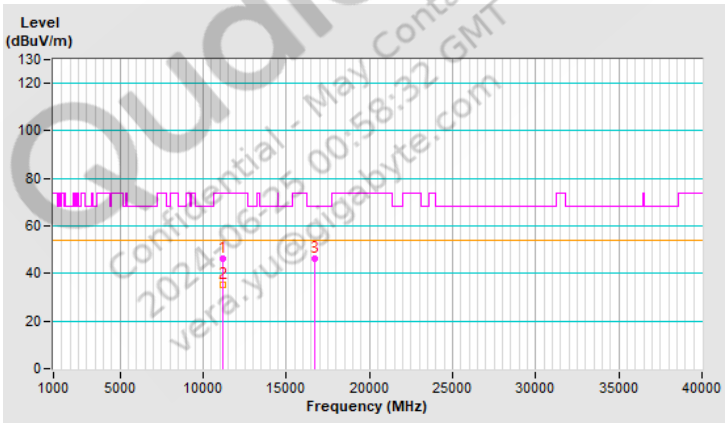


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	**Channel**	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11160.00	46.8 PK	74.0	-27.2	1.14 V	176	34.8	12.0
2	11160.00	35.9 AV	54.0	-18.1	1.14 V	176	23.9	12.0
3	#16740.00	45.2 PK	68.2	-23.0	1.06 V	147	30.0	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

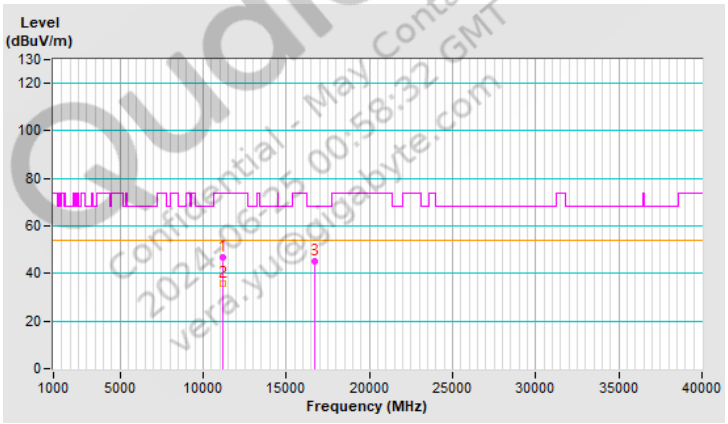


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	**Channel**	CH 140：5700 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11400.00	46.3 PK	74.0	-27.7	1.00 H	0	33.6	12.7
2	11400.00	35.8 AV	54.0	-18.2	1.00 H	0	23.1	12.7
3	#17100.00	45.7 PK	68.2	-22.5	1.00 H	0	29.4	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

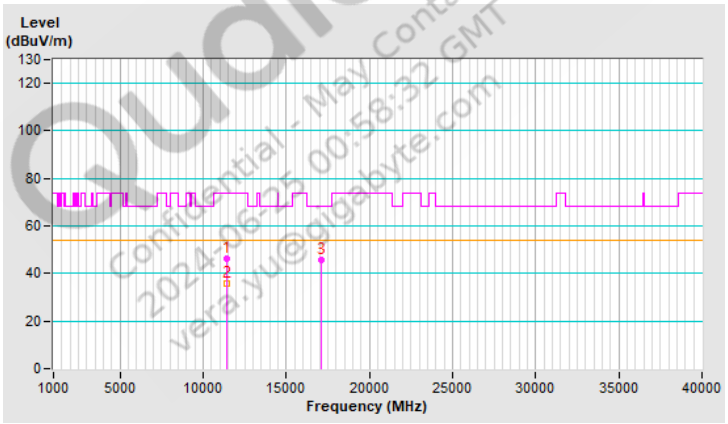


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	**Channel**	CH 140：5700 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11400.00	46.6 PK	74.0	-27.4	1.03 V	180	33.9	12.7
2	11400.00	35.9 AV	54.0	-18.1	1.03 V	180	23.2	12.7
3	#17100.00	45.6 PK	68.2	-22.6	1.12 V	171	29.3	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

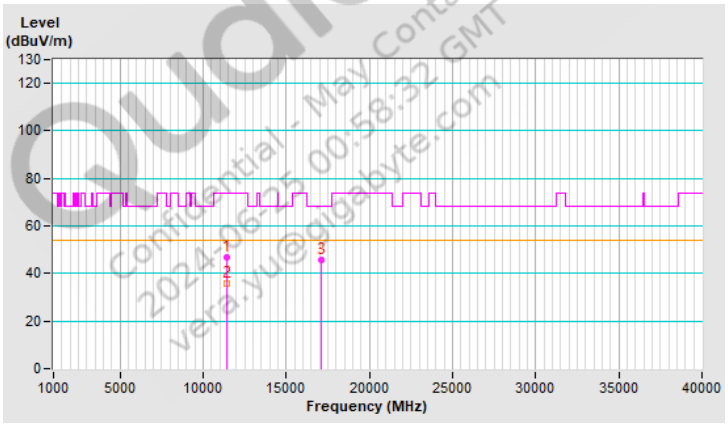


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	**Channel**	CH 144：5720 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11440.00	45.8 PK	74.0	-28.2	1.12 H	212	33.1	12.7
2	11440.00	35.2 AV	54.0	-18.8	1.12 H	212	22.5	12.7
3	#17160.00	46.4 PK	68.2	-21.8	1.22 H	204	30.1	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

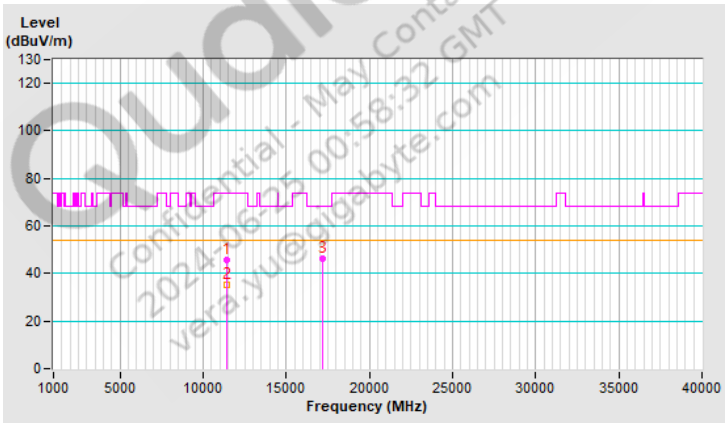


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	Channel	CH 144：5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	46.5 PK	74.0	-27.5	1.10 V	182	33.8	12.7
2	11440.00	35.9 AV	54.0	-18.1	1.10 V	182	23.2	12.7
3	#17160.00	45.3 PK	68.2	-22.9	1.09 V	175	29.0	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

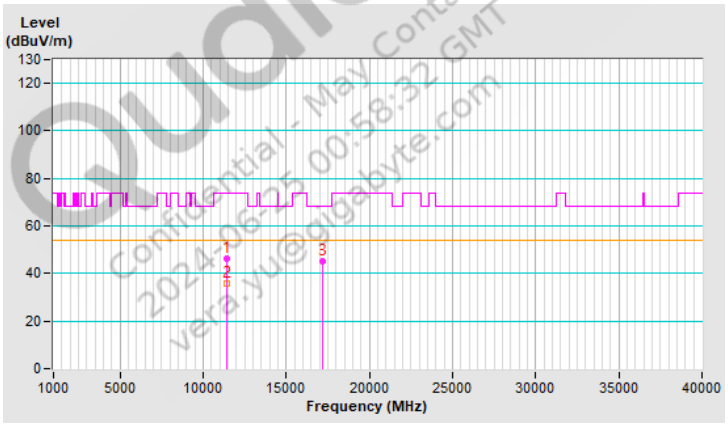


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	Channel	CH 149：5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	46.6 PK	74.0	-27.4	1.12 H	218	33.8	12.8
2	11490.00	35.8 AV	54.0	-18.2	1.12 H	218	23.0	12.8
3	#17235.00	45.7 PK	68.2	-22.5	1.22 H	201	29.2	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

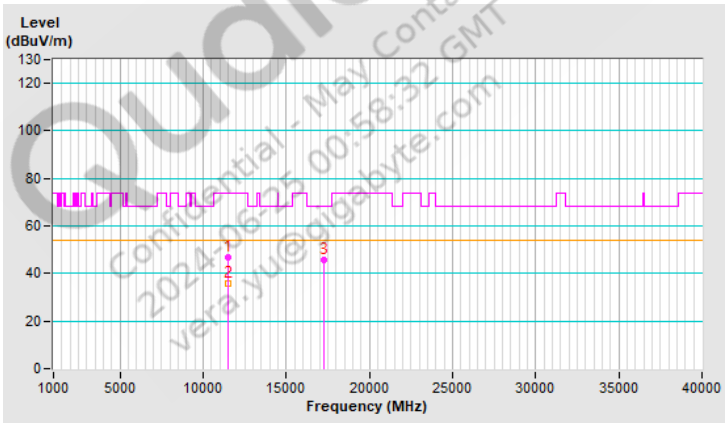


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	**Channel**	CH 149：5745 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11490.00	46.7 PK	74.0	-27.3	1.11 V	184	33.9	12.8
2	11490.00	36.0 AV	54.0	-18.0	1.11 V	184	23.2	12.8
3	#17235.00	46.3 PK	68.2	-21.9	1.10 V	159	29.8	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

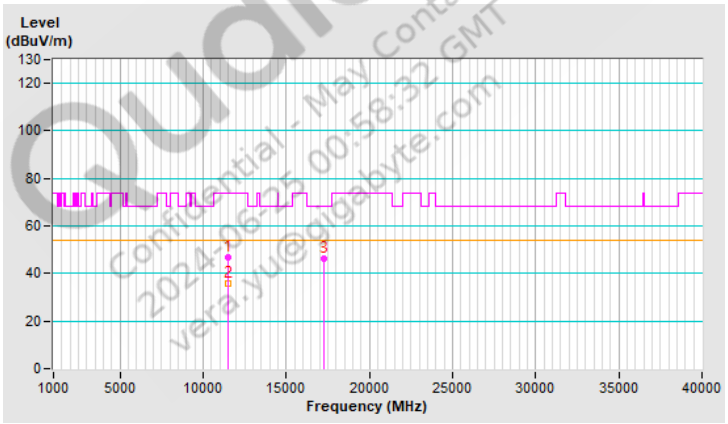


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	Channel	CH 157：5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	46.6 PK	74.0	-27.4	1.08 H	198	33.9	12.7
2	11570.00	35.9 AV	54.0	-18.1	1.08 H	198	23.2	12.7
3	#17355.00	46.1 PK	68.2	-22.1	1.20 H	208	28.7	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

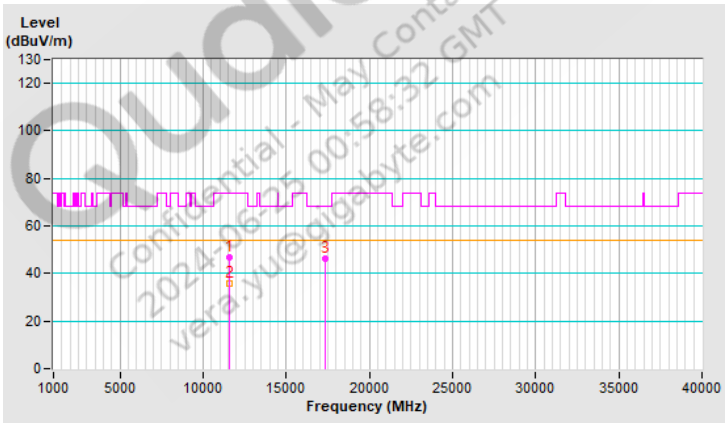


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
verajyu@gigabyte.com

RF Mode	802.11a	Channel	CH 157：5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	46.4 PK	74.0	-27.6	1.12 V	178	33.7	12.7
2	11570.00	35.7 AV	54.0	-18.3	1.12 V	178	23.0	12.7
3	#17355.00	46.0 PK	68.2	-22.2	1.09 V	160	28.6	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

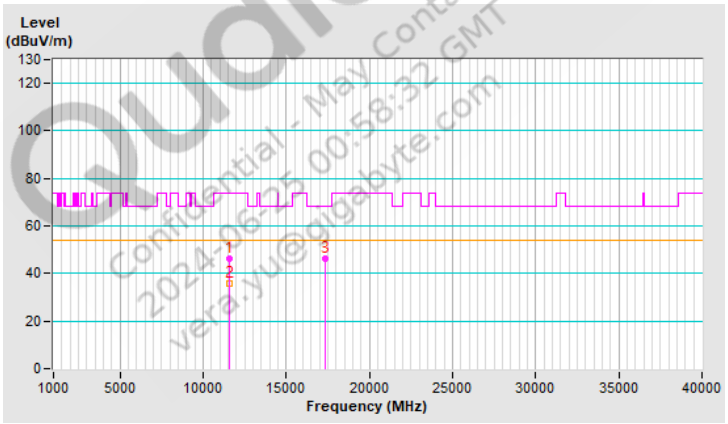


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
verajyu@gigabyte.com

RF Mode	802.11a	Channel	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	45.8 PK	74.0	-28.2	1.13 H	214	33.3	12.5
2	11650.00	35.2 AV	54.0	-18.8	1.13 H	214	22.7	12.5
3	#17475.00	46.4 PK	68.2	-21.8	1.29 H	191	27.7	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

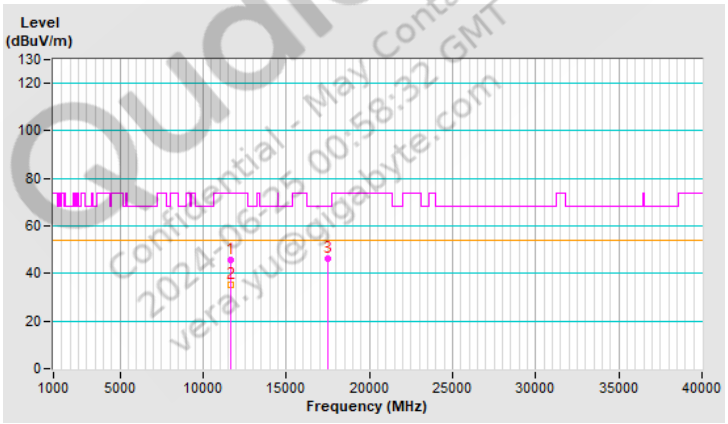


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11a	Channel	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	45.9 PK	74.0	-28.1	1.15 V	180	33.4	12.5
2	11650.00	35.2 AV	54.0	-18.8	1.15 V	180	22.7	12.5
3	#17475.00	46.3 PK	68.2	-21.9	1.06 V	158	27.6	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

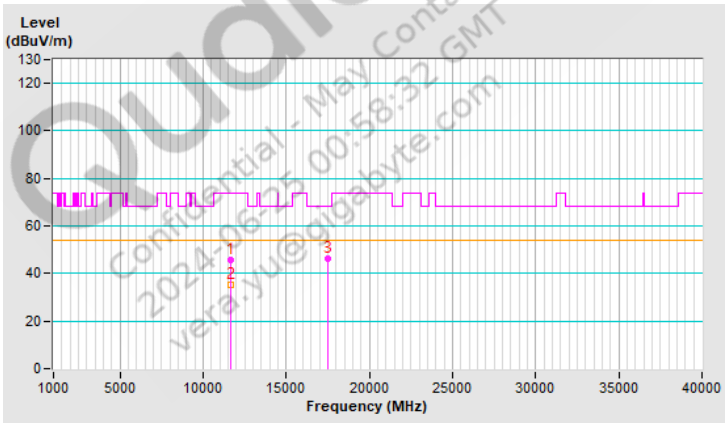


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	**Channel**	CH 36：5180 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10360.00	46.2 PK	68.2	-22.0	1.16 H	200	34.6	11.6
2	15540.00	46.3 PK	74.0	-27.7	1.21 H	178	34.5	11.8
3	15540.00	34.6 AV	54.0	-19.4	1.21 H	178	22.8	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

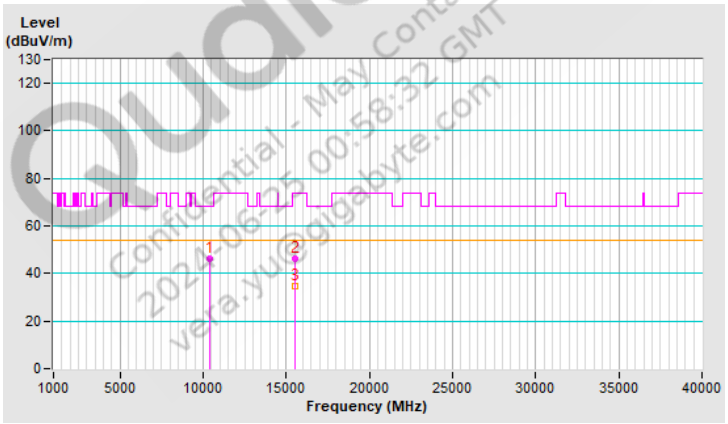


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	**Channel**	CH 36：5180 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10360.00	46.8 PK	68.2	-21.4	1.11 V	171	35.2	11.6
2	15540.00	46.0 PK	74.0	-28.0	1.14 V	164	34.2	11.8
3	15540.00	34.3 AV	54.0	-19.7	1.14 V	164	22.5	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

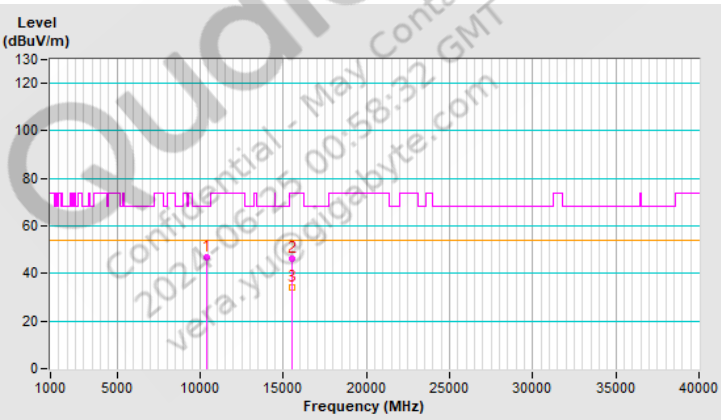


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	**Channel**	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10400.00	46.5 PK	68.2	-21.7	1.12 H	189	34.7	11.8
2	15600.00	45.8 PK	74.0	-28.2	1.28 H	180	34.1	11.7
3	15600.00	34.6 AV	54.0	-19.4	1.28 H	180	22.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

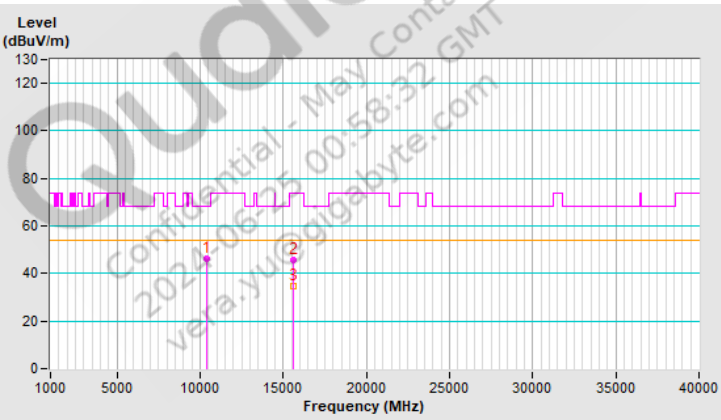


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	**Channel**	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10400.00	46.6 PK	68.2	-21.6	1.12 V	188	34.8	11.8
2	15600.00	45.5 PK	74.0	-28.5	1.13 V	160	33.8	11.7
3	15600.00	34.2 AV	54.0	-19.8	1.13 V	160	22.5	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

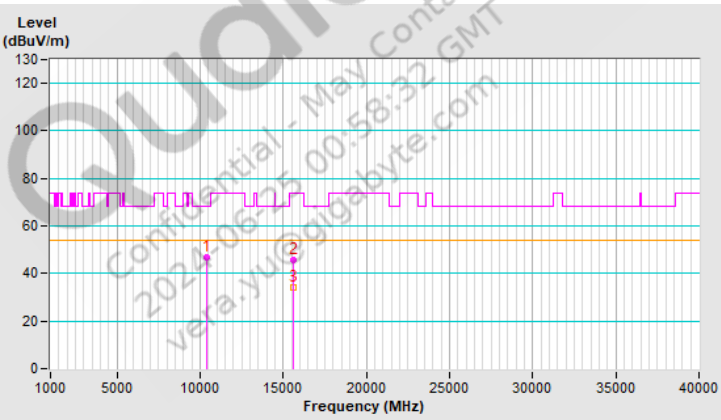


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	**Channel**	CH 48：5240 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10480.00	45.9 PK	68.2	-22.3	1.09 H	199	34.1	11.8
2	15720.00	45.7 PK	74.0	-28.3	1.28 H	169	34.1	11.6
3	15720.00	34.1 AV	54.0	-19.9	1.28 H	169	22.5	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

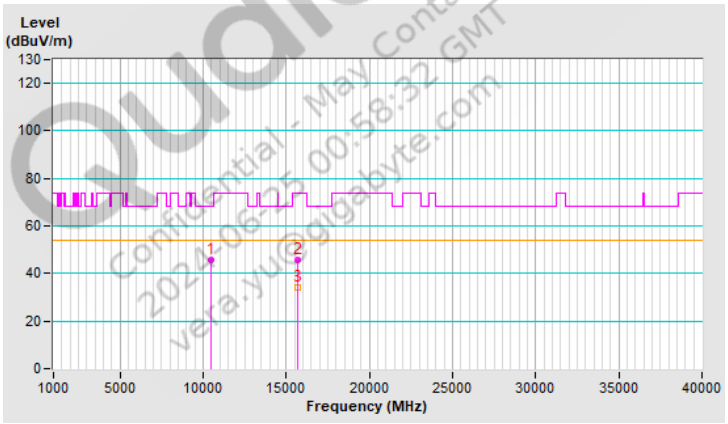


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	**Channel**	CH 48：5240 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10480.00	45.9 PK	68.2	-22.3	1.06 V	193	34.1	11.8
2	15720.00	46.3 PK	74.0	-27.7	1.15 V	153	34.7	11.6
3	15720.00	34.6 AV	54.0	-19.4	1.15 V	153	23.0	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

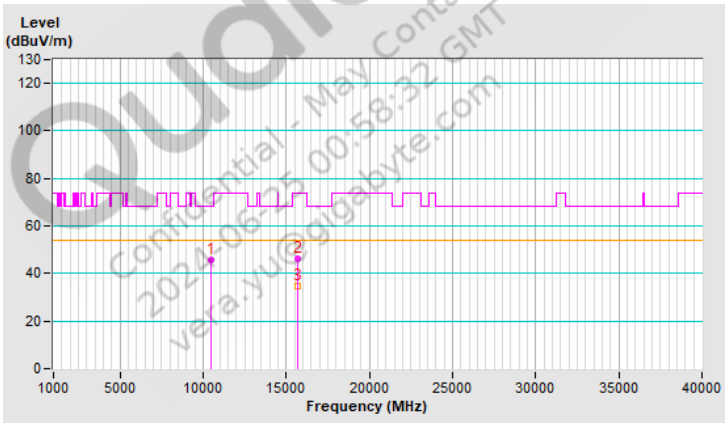


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	**Channel**	CH 52：5260 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10520.00	45.9 PK	68.2	-22.3	1.12 H	202	34.2	11.7
2	15780.00	46.1 PK	74.0	-27.9	1.29 H	182	34.8	11.3
3	15780.00	34.4 AV	54.0	-19.6	1.29 H	182	23.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

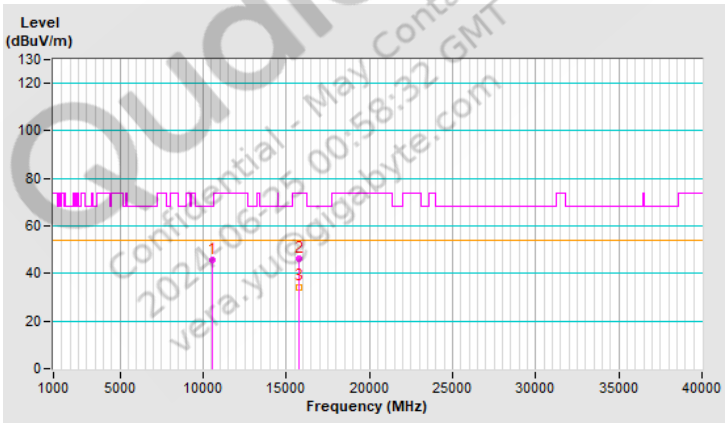


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	**Channel**	CH 52：5260 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10520.00	46.4 PK	68.2	-21.8	1.11 V	189	34.7	11.7
2	15780.00	46.3 PK	74.0	-27.7	1.19 V	152	35.0	11.3
3	15780.00	35.0 AV	54.0	-19.0	1.19 V	152	23.7	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

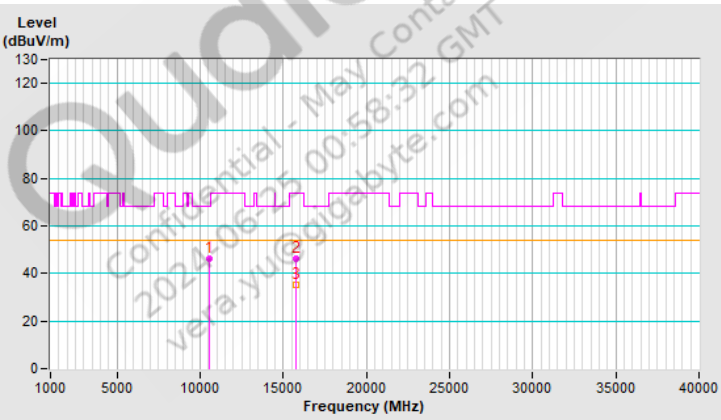


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	Channel	CH 60：5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	45.6 PK	74.0	-28.4	1.11 H	214	33.9	11.7
2	10600.00	35.2 AV	54.0	-18.8	1.11 H	214	23.5	11.7
3	15900.00	45.8 PK	74.0	-28.2	1.25 H	182	34.8	11.0
4	15900.00	34.5 AV	54.0	-19.5	1.25 H	182	23.5	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

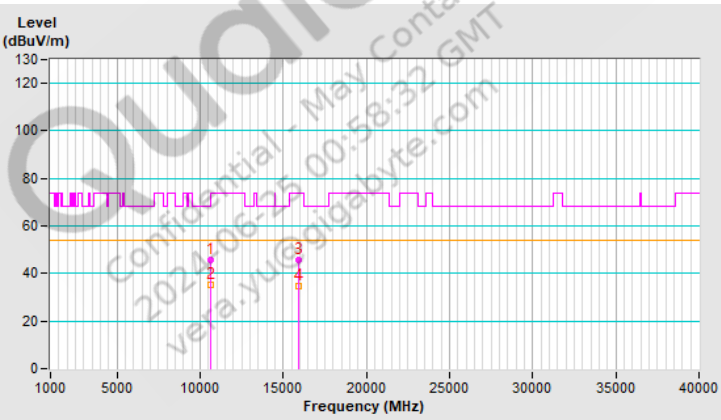


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20)	**Channel**	CH 60：5300 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10600.00	46.3 PK	74.0	-27.7	1.11 V	184	34.6	11.7
2	10600.00	35.8 AV	54.0	-18.2	1.11 V	184	24.1	11.7
3	15900.00	45.8 PK	74.0	-28.2	1.20 V	140	34.8	11.0
4	15900.00	34.4 AV	54.0	-19.6	1.20 V	140	23.4	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

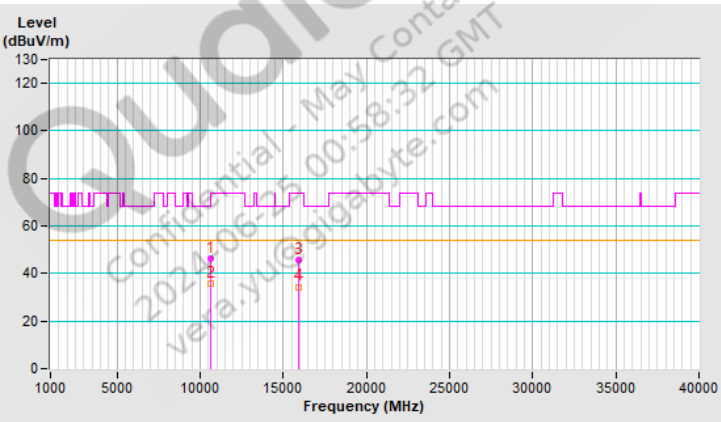


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yue@gigabyte.com

RF Mode	802.11be (EHT20)	Channel	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	46.7 PK	74.0	-27.3	1.14 H	212	35.0	11.7
2	10640.00	35.8 AV	54.0	-18.2	1.14 H	212	24.1	11.7
3	15960.00	45.8 PK	74.0	-28.2	1.21 H	177	34.5	11.3
4	15960.00	34.5 AV	54.0	-19.5	1.21 H	177	23.2	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

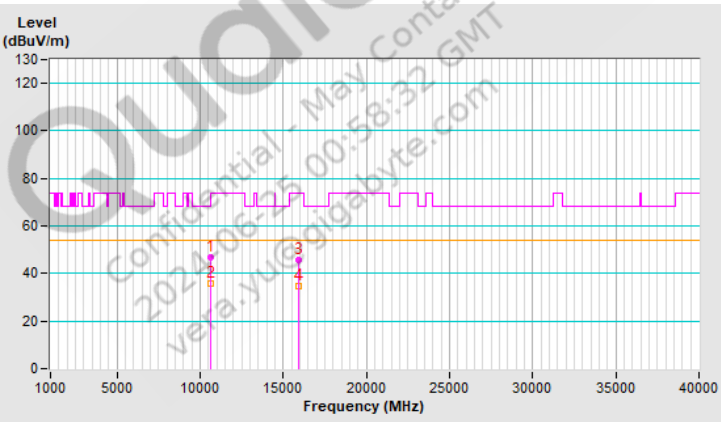


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20)	Channel	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	46.2 PK	74.0	-27.8	1.10 V	182	34.5	11.7
2	10640.00	35.3 AV	54.0	-18.7	1.10 V	182	23.6	11.7
3	15960.00	46.4 PK	74.0	-27.6	1.16 V	148	35.1	11.3
4	15960.00	34.7 AV	54.0	-19.3	1.16 V	148	23.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

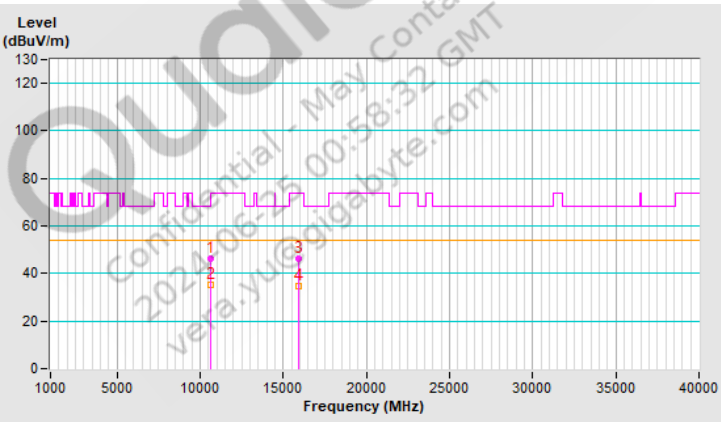


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20)	**Channel**	CH 100：5500 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11000.00	46.1 PK	74.0	-27.9	1.15 H	196	33.7	12.4
2	11000.00	35.6 AV	54.0	-18.4	1.15 H	196	23.2	12.4
3	#16500.00	46.5 PK	68.2	-21.7	1.29 H	175	32.8	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

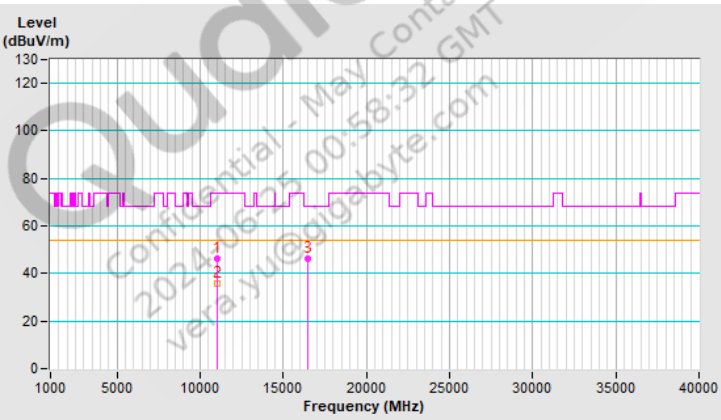


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	**Channel**	CH 100：5500 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11000.00	45.9 PK	74.0	-28.1	1.06 V	177	33.5	12.4
2	11000.00	35.2 AV	54.0	-18.8	1.06 V	177	22.8	12.4
3	#16500.00	46.2 PK	68.2	-22.0	1.19 V	155	32.5	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

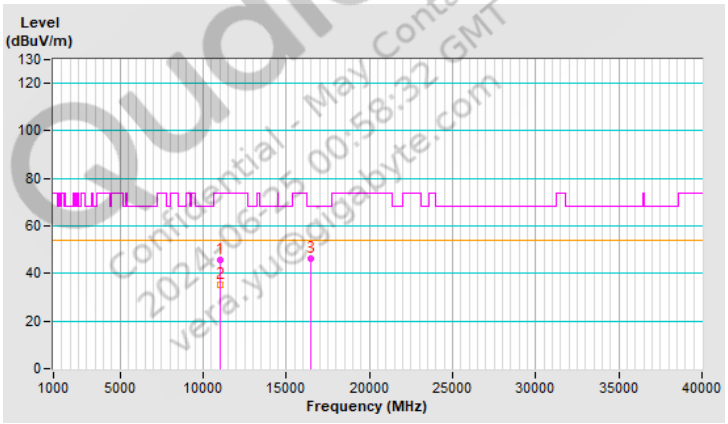


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	**Channel**	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11160.00	46.6 PK	74.0	-27.4	1.10 H	196	34.6	12.0
2	11160.00	36.0 AV	54.0	-18.0	1.10 H	196	24.0	12.0
3	#16740.00	46.0 PK	68.2	-22.2	1.23 H	191	30.8	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

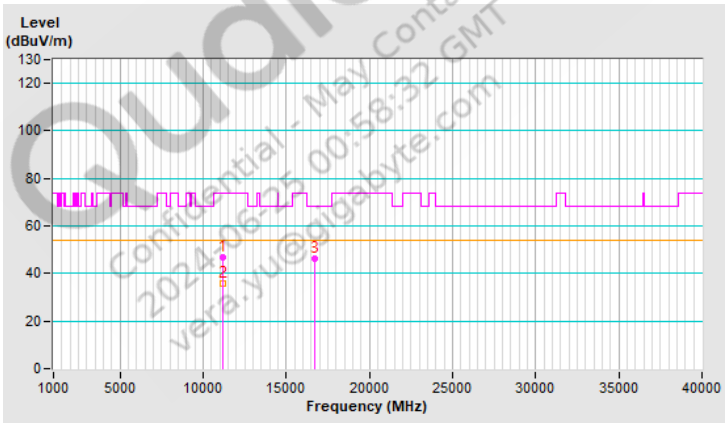


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	**Channel**	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11160.00	45.7 PK	74.0	-28.3	1.13 V	166	33.7	12.0
2	11160.00	35.2 AV	54.0	-18.8	1.13 V	166	23.2	12.0
3	#16740.00	46.4 PK	68.2	-21.8	1.23 V	163	31.2	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

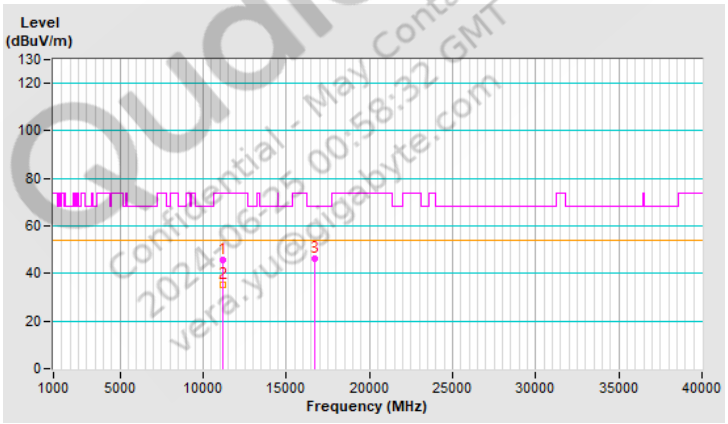


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	Channel	CH 140：5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	45.9 PK	74.0	-28.1	1.13 H	208	33.2	12.7
2	11400.00	35.3 AV	54.0	-18.7	1.13 H	208	22.6	12.7
3	#17100.00	45.2 PK	68.2	-23.0	1.29 H	181	28.9	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

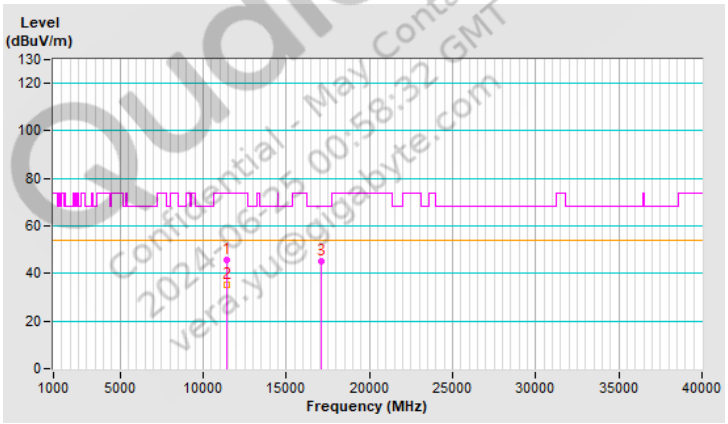


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	Channel	CH 140：5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	46.4 PK	74.0	-27.6	1.08 V	174	33.7	12.7
2	11400.00	35.5 AV	54.0	-18.5	1.08 V	174	22.8	12.7
3	#17100.00	45.6 PK	68.2	-22.6	1.17 V	148	29.3	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

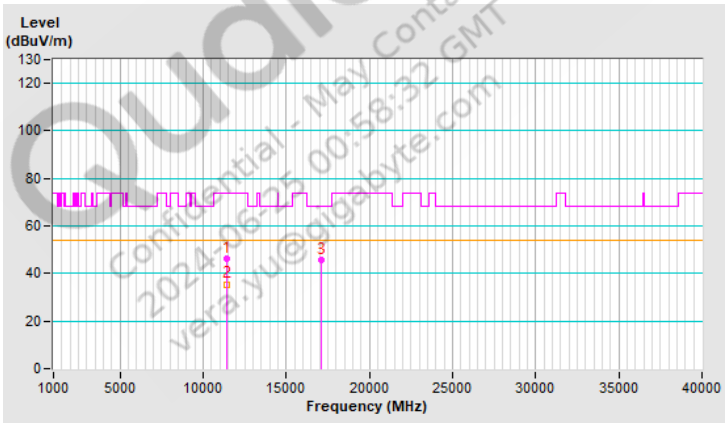


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	Channel	CH 144：5720 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11440.00	46.8 PK	74.0	-27.2	1.12 H	219	34.1	12.7
2	11440.00	35.9 AV	54.0	-18.1	1.12 H	219	23.2	12.7
3	#17160.00	46.1 PK	68.2	-22.1	1.24 H	175	29.8	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

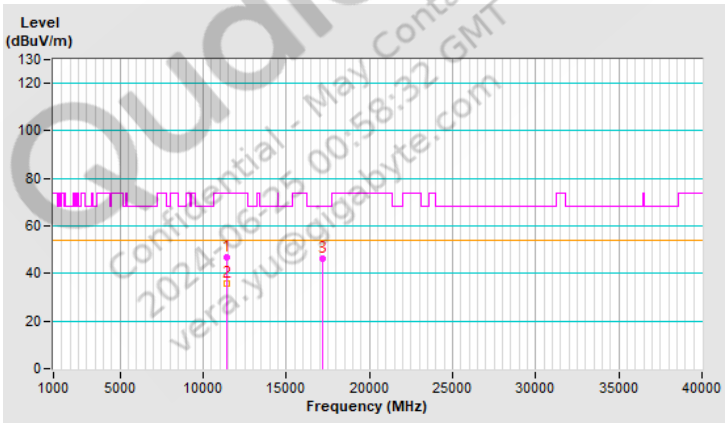


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	**Channel**	CH 144：5720 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11440.00	46.0 PK	74.0	-28.0	1.08 V	173	33.3	12.7
2	11440.00	35.4 AV	54.0	-18.6	1.08 V	173	22.7	12.7
3	#17160.00	46.1 PK	68.2	-22.1	1.15 V	168	29.8	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

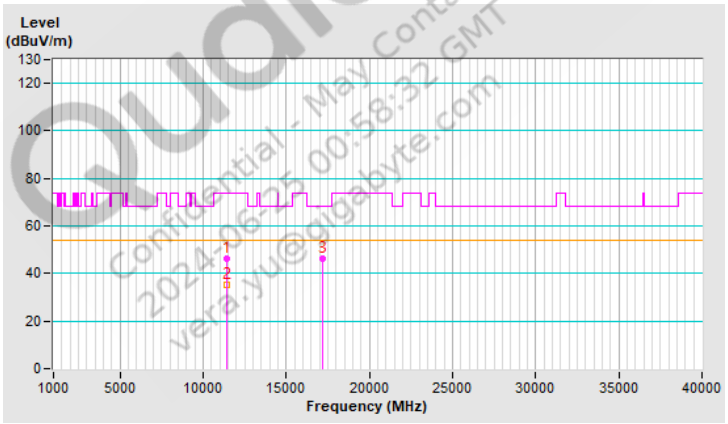


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	Channel	CH 149：5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	45.6 PK	74.0	-28.4	1.13 H	200	32.8	12.8
2	11490.00	35.2 AV	54.0	-18.8	1.13 H	200	22.4	12.8
3	#17235.00	46.7 PK	68.2	-21.5	1.31 H	188	30.2	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

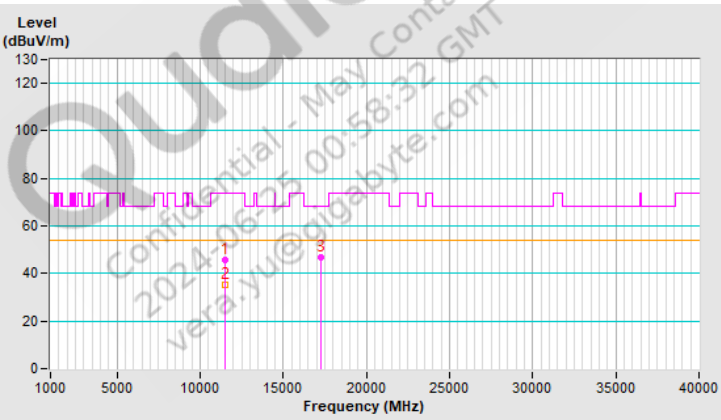


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	Channel	CH 149：5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	45.5 PK	74.0	-28.5	1.06 V	187	32.7	12.8
2	11490.00	35.1 AV	54.0	-18.9	1.06 V	187	22.3	12.8
3	#17235.00	45.4 PK	68.2	-22.8	1.22 V	141	28.9	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

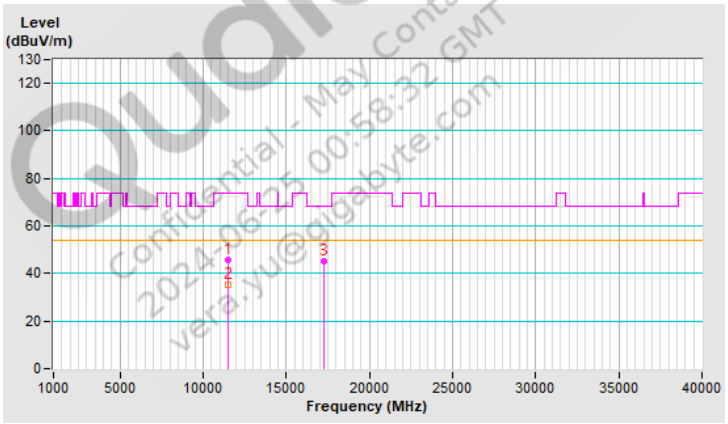


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	Channel	CH 157：5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	45.9 PK	74.0	-28.1	1.20 H	192	33.2	12.7
2	11570.00	35.1 AV	54.0	-18.9	1.20 H	192	22.4	12.7
3	#17355.00	46.1 PK	68.2	-22.1	1.30 H	174	28.7	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

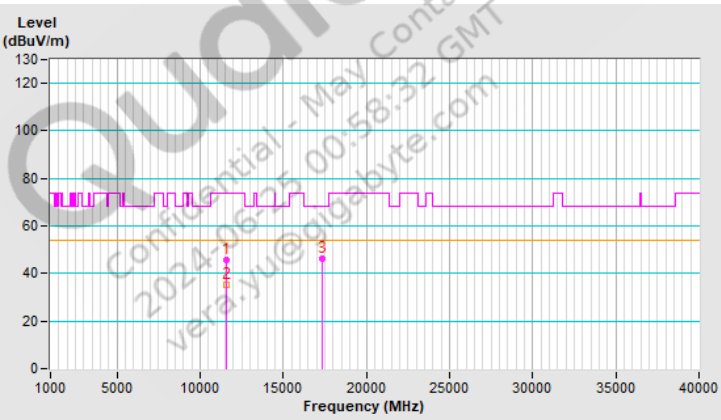


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	Channel	CH 157：5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	46.0 PK	74.0	-28.0	1.13 V	188	33.3	12.7
2	11570.00	35.3 AV	54.0	-18.7	1.13 V	188	22.6	12.7
3	#17355.00	46.6 PK	68.2	-21.6	1.22 V	170	29.2	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

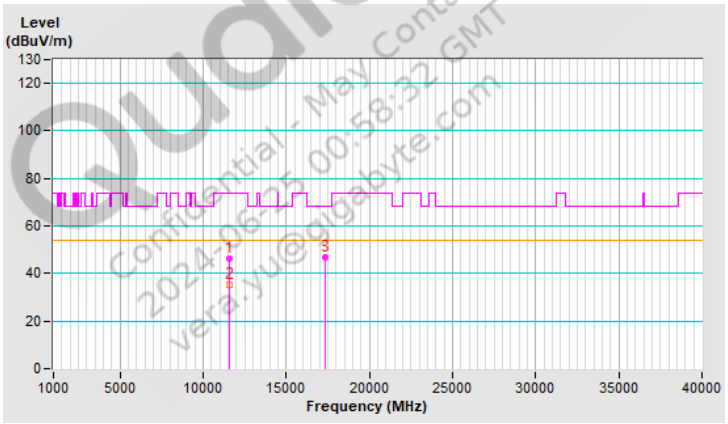


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	Channel	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	46.0 PK	74.0	-28.0	1.18 H	215	33.5	12.5
2	11650.00	35.6 AV	54.0	-18.4	1.18 H	215	23.1	12.5
3	#17475.00	46.0 PK	68.2	-22.2	1.22 H	176	27.3	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

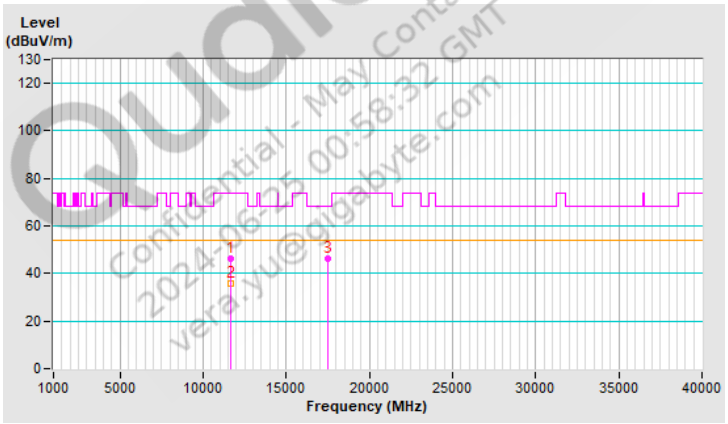


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20)	Channel	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	46.0 PK	74.0	-28.0	1.12 V	186	33.5	12.5
2	11650.00	35.5 AV	54.0	-18.5	1.12 V	186	23.0	12.5
3	#17475.00	46.2 PK	68.2	-22.0	1.21 V	150	27.5	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

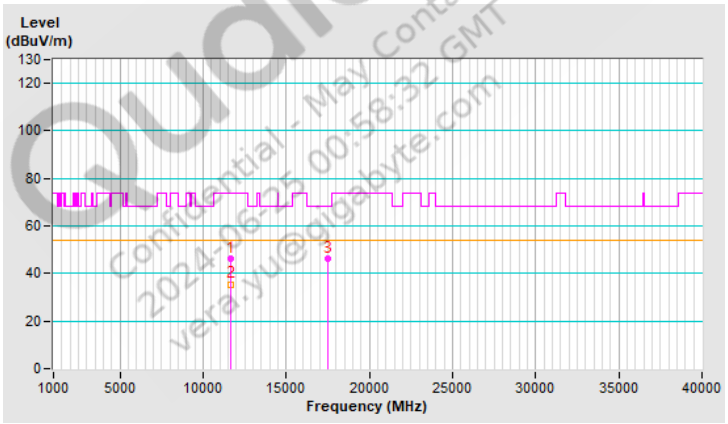


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	**Channel**	CH 38：5190 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10380.00	45.7 PK	68.2	-22.5	1.11 H	214	33.9	11.8
2	15570.00	45.7 PK	74.0	-28.3	1.30 H	191	33.9	11.8
3	15570.00	34.3 AV	54.0	-19.7	1.30 H	191	22.5	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

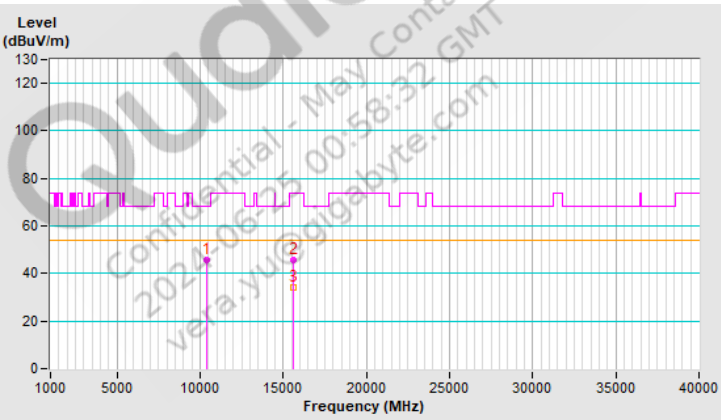


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	**Channel**	CH 38：5190 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10380.00	46.8 PK	68.2	-21.4	1.07 V	186	35.0	11.8
2	15570.00	46.1 PK	74.0	-27.9	1.24 V	158	34.3	11.8
3	15570.00	34.7 AV	54.0	-19.3	1.24 V	158	22.9	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

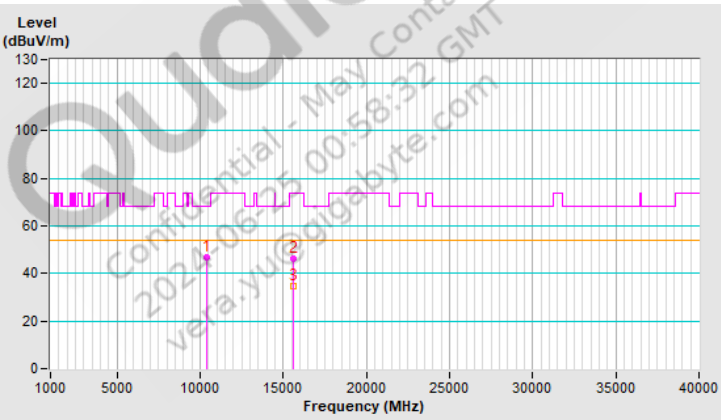


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	Channel	CH 46：5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	46.0 PK	68.2	-22.2	1.09 H	210	34.2	11.8
2	15690.00	45.9 PK	74.0	-28.1	1.24 H	192	34.2	11.7
3	15690.00	34.5 AV	54.0	-19.5	1.24 H	192	22.8	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

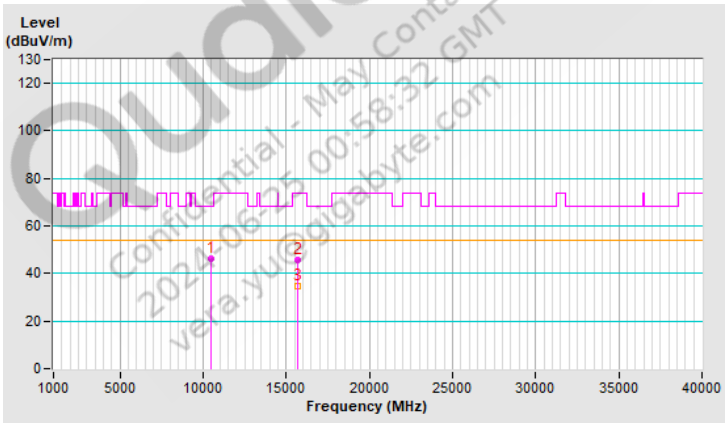


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	**Channel**	CH 46：5230 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10460.00	45.8 PK	68.2	-22.4	1.13 V	183	34.0	11.8
2	15690.00	46.5 PK	74.0	-27.5	1.14 V	164	34.8	11.7
3	15690.00	34.9 AV	54.0	-19.1	1.14 V	164	23.2	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

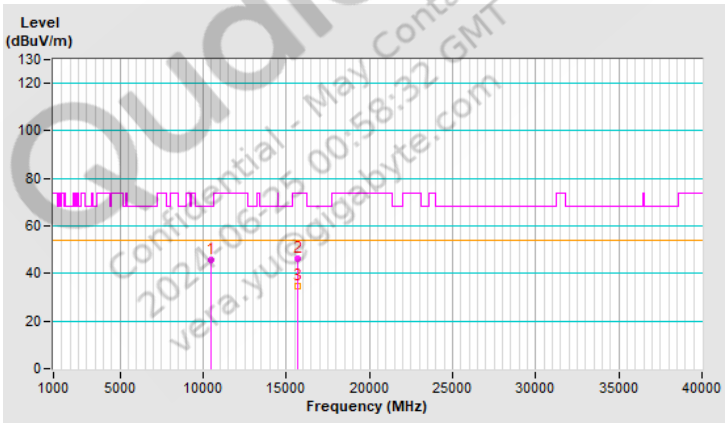


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	**Channel**	CH 54：5270 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10540.00	46.5 PK	68.2	-21.7	1.21 H	210	34.7	11.8
2	15810.00	46.0 PK	74.0	-28.0	1.30 H	186	34.8	11.2
3	15810.00	34.8 AV	54.0	-19.2	1.30 H	186	23.6	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

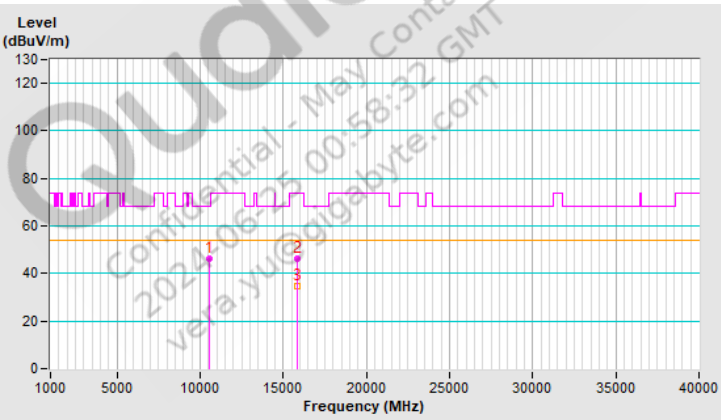


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	**Channel**	CH 54：5270 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10540.00	46.4 PK	68.2	-21.8	1.05 V	194	34.6	11.8
2	15810.00	46.6 PK	74.0	-27.4	1.23 V	169	35.4	11.2
3	15810.00	34.9 AV	54.0	-19.1	1.23 V	169	23.7	11.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

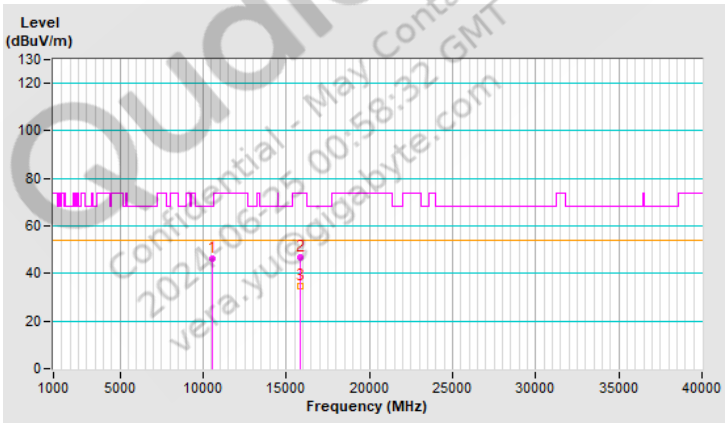


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	**Channel**	CH 62：5310 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10620.00	46.4 PK	74.0	-27.6	1.13 H	218	34.7	11.7
2	10620.00	35.8 AV	54.0	-18.2	1.13 H	218	24.1	11.7
3	15930.00	45.4 PK	74.0	-28.6	1.21 H	188	34.3	11.1
4	15930.00	34.1 AV	54.0	-19.9	1.21 H	188	23.0	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

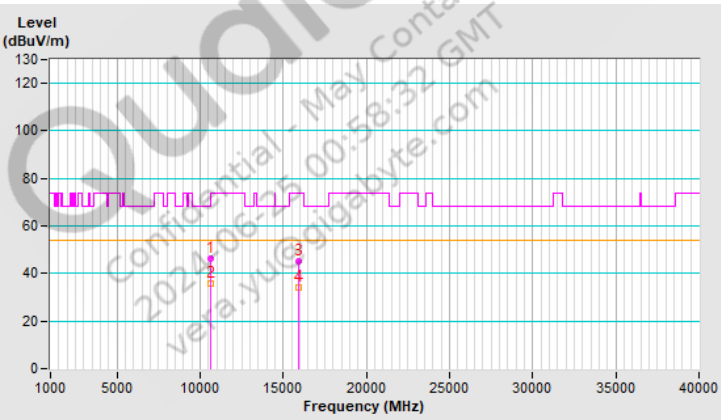


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	Channel	CH 62：5310 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10620.00	46.2 PK	74.0	-27.8	1.04 V	194	34.5	11.7
2	10620.00	35.6 AV	54.0	-18.4	1.04 V	194	23.9	11.7
3	15930.00	45.7 PK	74.0	-28.3	1.19 V	159	34.6	11.1
4	15930.00	34.3 AV	54.0	-19.7	1.19 V	159	23.2	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

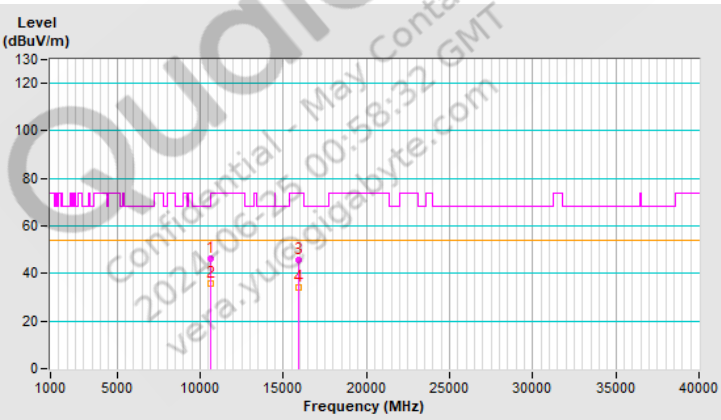


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT40)	Channel	CH 102：5510 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11020.00	46.3 PK	74.0	-27.7	1.15 H	210	33.9	12.4
2	11020.00	35.8 AV	54.0	-18.2	1.15 H	210	23.4	12.4
3	#16530.00	46.6 PK	68.2	-21.6	1.21 H	170	32.7	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

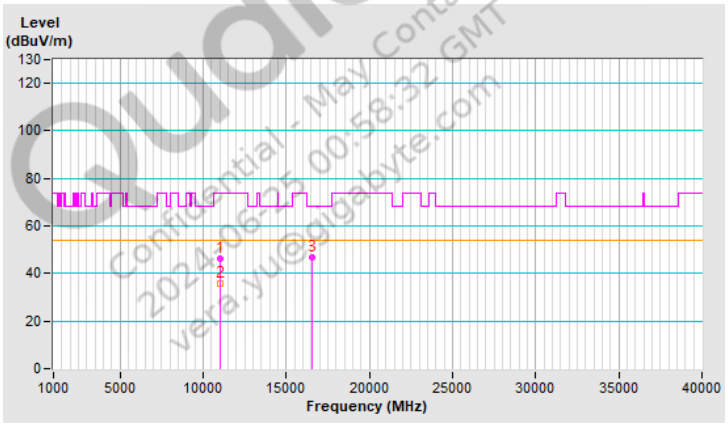


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	**Channel**	CH 102：5510 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11020.00	46.2 PK	74.0	-27.8	1.07 V	182	33.8	12.4
2	11020.00	35.5 AV	54.0	-18.5	1.07 V	182	23.1	12.4
3	#16530.00	45.8 PK	68.2	-22.4	1.20 V	141	31.9	13.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

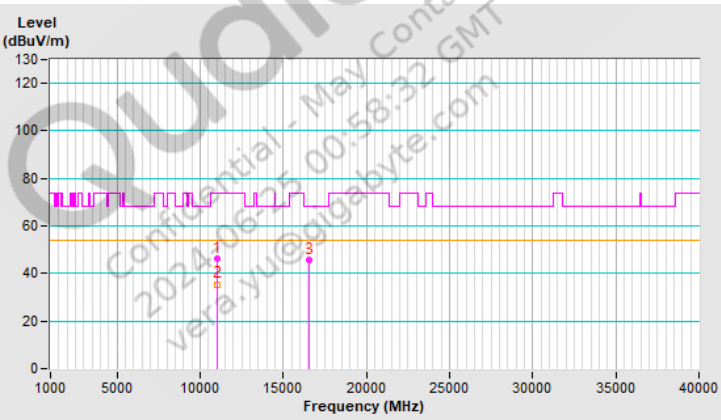


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	**Channel**	CH 110：5550 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11100.00	46.2 PK	74.0	-27.8	1.11 H	197	34.0	12.2
2	11100.00	35.3 AV	54.0	-18.7	1.11 H	197	23.1	12.2
3	#16650.00	45.6 PK	68.2	-22.6	1.24 H	167	30.8	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

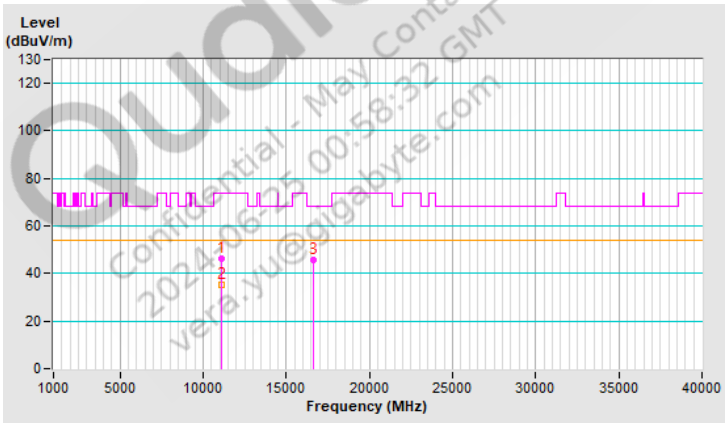


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	**Channel**	CH 110：5550 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11100.00	46.2 PK	74.0	-27.8	1.11 V	184	34.0	12.2
2	11100.00	35.5 AV	54.0	-18.5	1.11 V	184	23.3	12.2
3	#16650.00	45.8 PK	68.2	-22.4	1.18 V	147	31.0	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

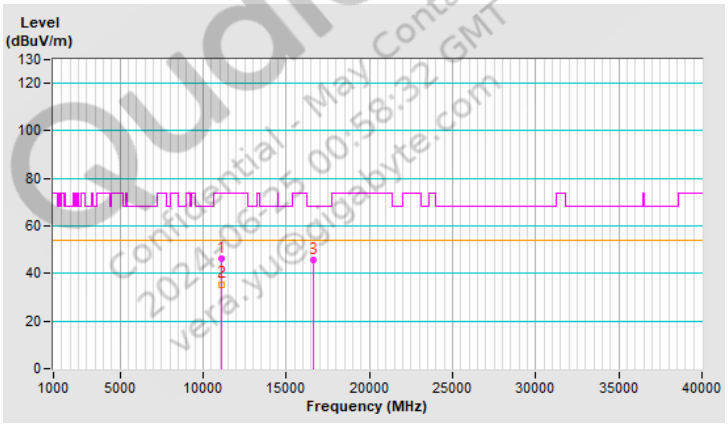


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	Channel	CH 134：5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	46.3 PK	74.0	-27.7	1.17 H	196	33.8	12.5
2	11340.00	35.7 AV	54.0	-18.3	1.17 H	196	23.2	12.5
3	#17010.00	46.1 PK	68.2	-22.1	1.27 H	192	29.8	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

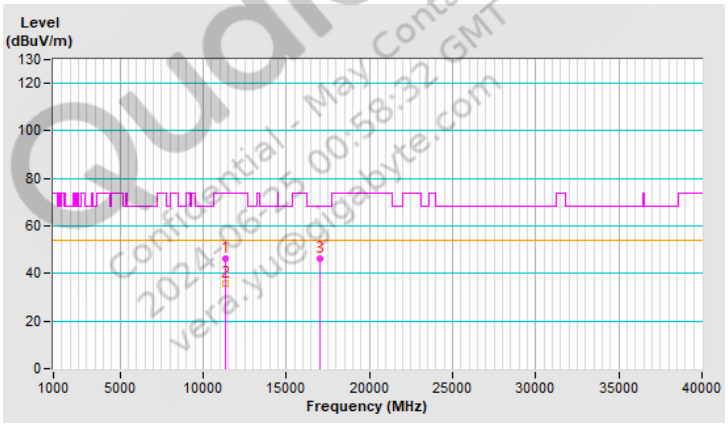


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	Channel	CH 134：5670 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11340.00	46.1 PK	74.0	-27.9	1.11 V	177	33.6	12.5
2	11340.00	35.7 AV	54.0	-18.3	1.11 V	177	23.2	12.5
3	#17010.00	45.9 PK	68.2	-22.3	1.23 V	152	29.6	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

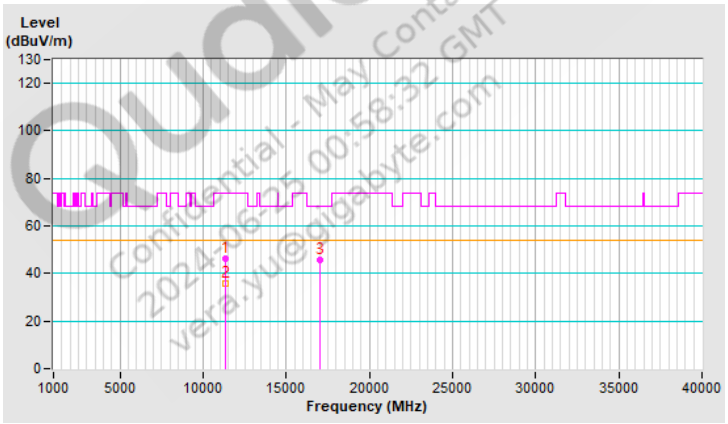


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	Channel	CH 142：5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	46.3 PK	74.0	-27.7	1.20 H	194	33.6	12.7
2	11420.00	35.7 AV	54.0	-18.3	1.20 H	194	23.0	12.7
3	#17130.00	46.4 PK	68.2	-21.8	1.22 H	171	30.1	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

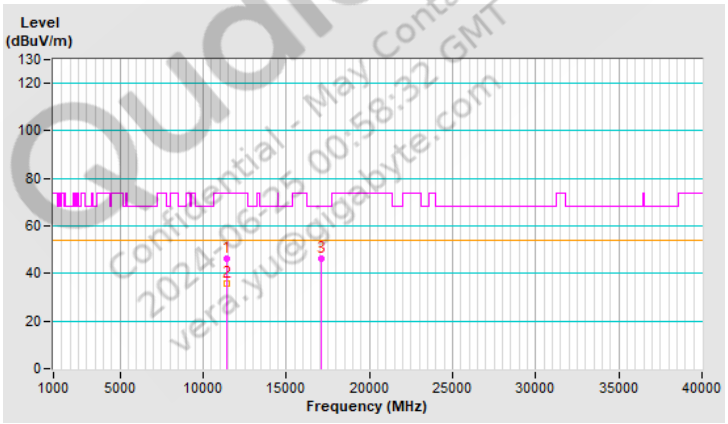


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	Channel	CH 142：5710 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11420.00	46.2 PK	74.0	-27.8	1.06 V	166	33.5	12.7
2	11420.00	35.5 AV	54.0	-18.5	1.06 V	166	22.8	12.7
3	#17130.00	46.0 PK	68.2	-22.2	1.22 V	148	29.7	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

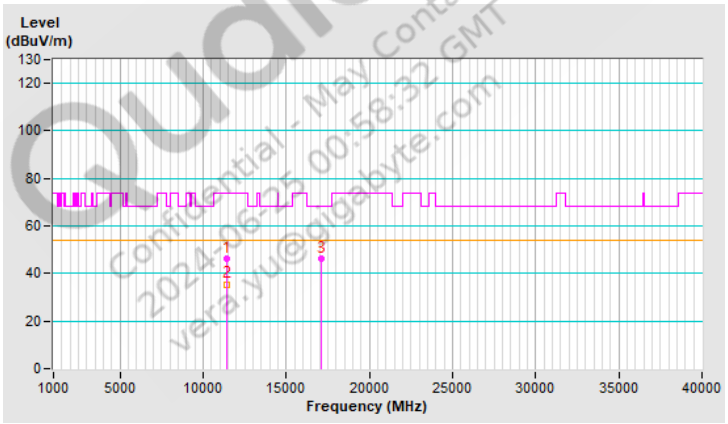


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	**Channel**	CH 151：5755 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11510.00	46.0 PK	74.0	-28.0	1.16 H	203	33.2	12.8
2	11510.00	35.1 AV	54.0	-18.9	1.16 H	203	22.3	12.8
3	#17265.00	46.0 PK	68.2	-22.2	1.23 H	185	29.4	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

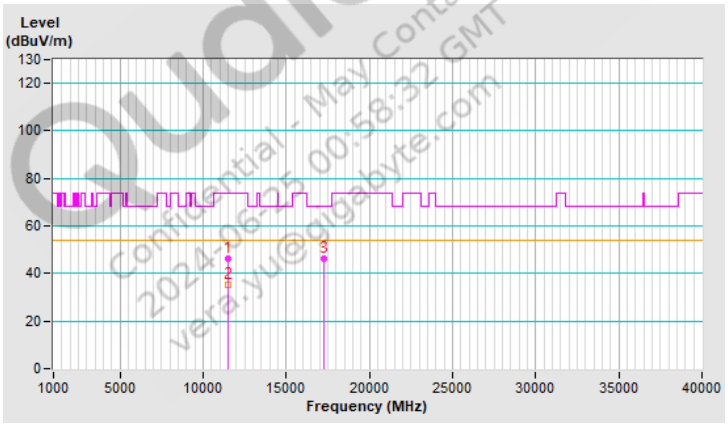


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	**Channel**	CH 151：5755 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11510.00	46.6 PK	74.0	-27.4	1.11 V	180	33.8	12.8
2	11510.00	35.9 AV	54.0	-18.1	1.11 V	180	23.1	12.8
3	#17265.00	45.7 PK	68.2	-22.5	1.22 V	144	29.1	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

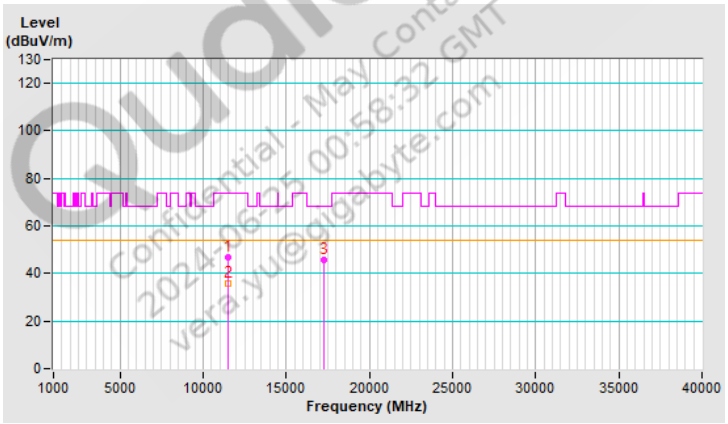


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	**Channel**	CH 159：5795 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11590.00	46.0 PK	74.0	-28.0	1.09 H	212	33.3	12.7
2	11590.00	35.6 AV	54.0	-18.4	1.09 H	212	22.9	12.7
3	#17385.00	45.6 PK	68.2	-22.6	1.27 H	179	28.0	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

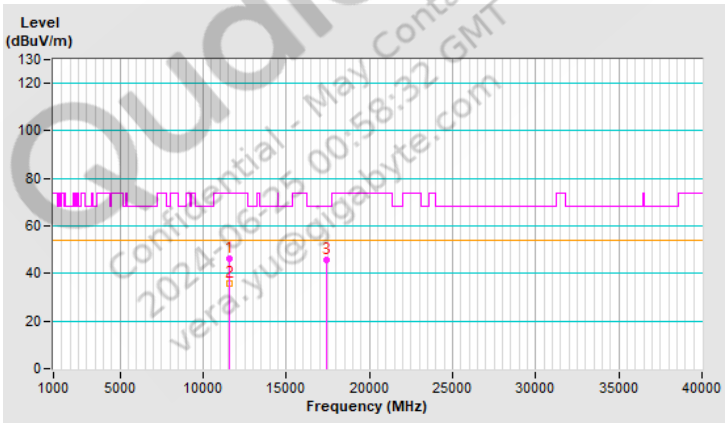


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40)	Channel	CH 159：5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11590.00	46.5 PK	74.0	-27.5	1.04 V	177	33.8	12.7
2	11590.00	35.6 AV	54.0	-18.4	1.04 V	177	22.9	12.7
3	#17385.00	46.4 PK	68.2	-21.8	1.14 V	145	28.8	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

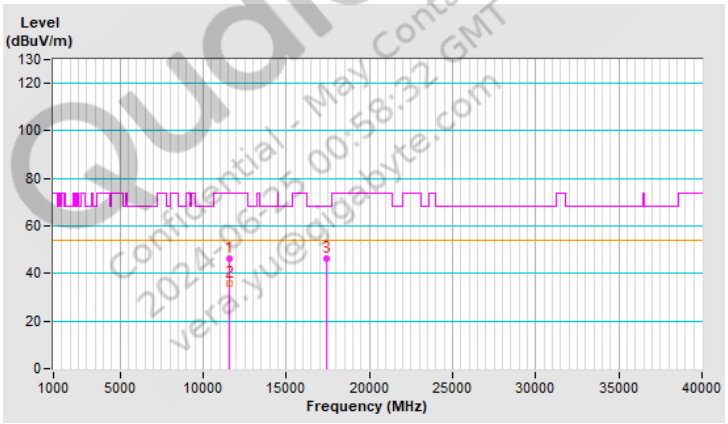


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
verajyu@gigabyte.com

RF Mode	802.11be (EHT80)	**Channel**	CH 42：5210 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10420.00	46.3 PK	68.2	-21.9	1.13 H	210	34.4	11.9
2	15630.00	46.1 PK	74.0	-27.9	1.20 H	191	34.4	11.7
3	15630.00	34.4 AV	54.0	-19.6	1.20 H	191	22.7	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

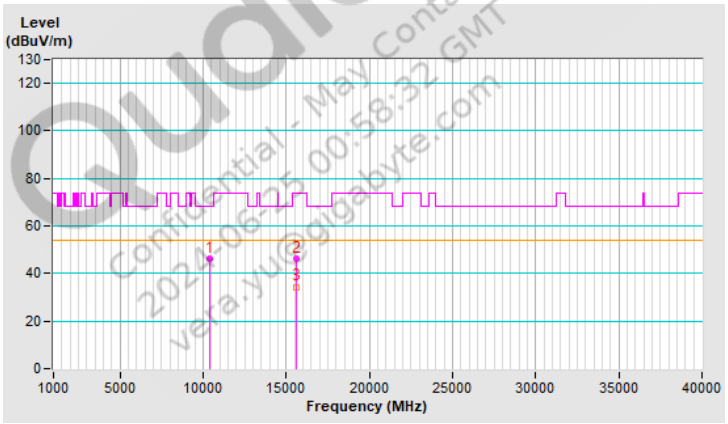


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80)	Channel	CH 42：5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	46.4 PK	68.2	-21.8	1.04 V	181	34.5	11.9
2	15630.00	45.4 PK	74.0	-28.6	1.17 V	162	33.7	11.7
3	15630.00	34.2 AV	54.0	-19.8	1.17 V	162	22.5	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

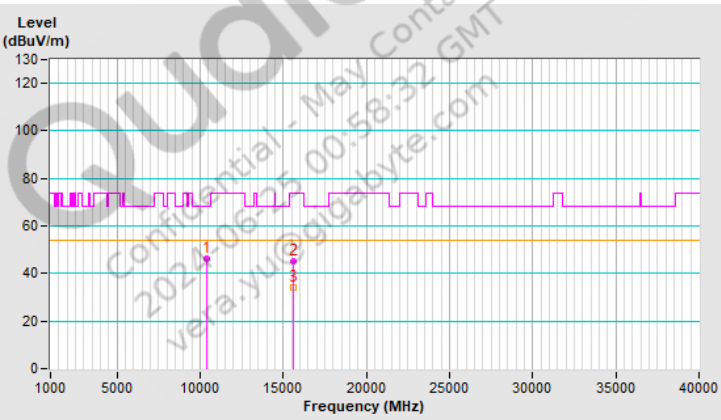


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80)	**Channel**	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10580.00	46.7 PK	68.2	-21.5	1.17 H	205	35.0	11.7
2	15870.00	45.3 PK	74.0	-28.7	1.23 H	192	34.3	11.0
3	15870.00	34.1 AV	54.0	-19.9	1.23 H	192	23.1	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

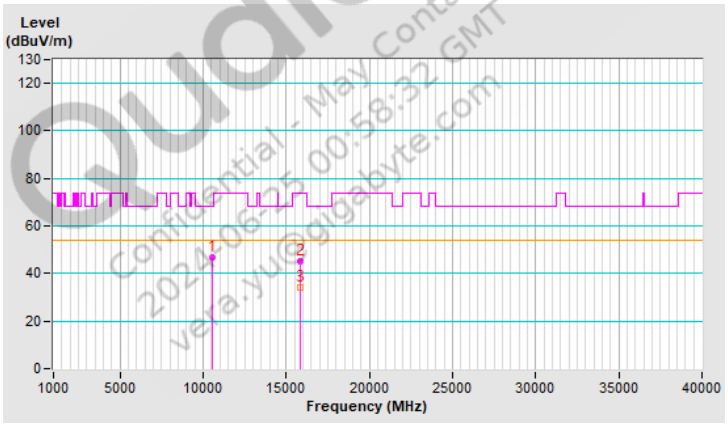


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80)	**Channel**	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10580.00	46.3 PK	68.2	-21.9	1.11 V	178	34.6	11.7
2	15870.00	45.5 PK	74.0	-28.5	1.16 V	156	34.5	11.0
3	15870.00	34.3 AV	54.0	-19.7	1.16 V	156	23.3	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

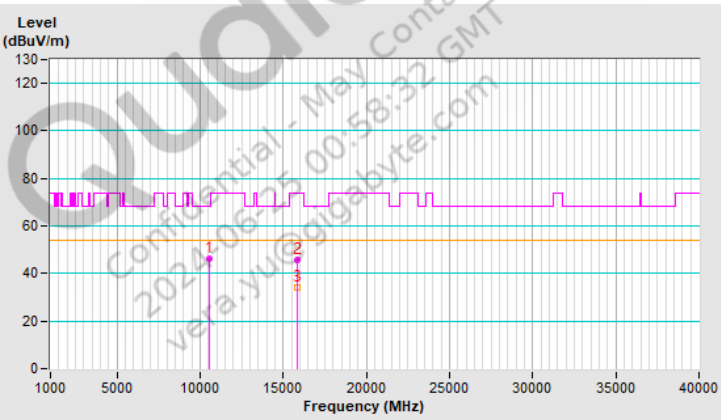


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80)	Channel	CH 106：5530 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11060.00	46.2 PK	74.0	-27.8	1.15 H	211	33.9	12.3
2	11060.00	35.4 AV	54.0	-18.6	1.15 H	211	23.1	12.3
3	#16590.00	46.3 PK	68.2	-21.9	1.21 H	190	31.8	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

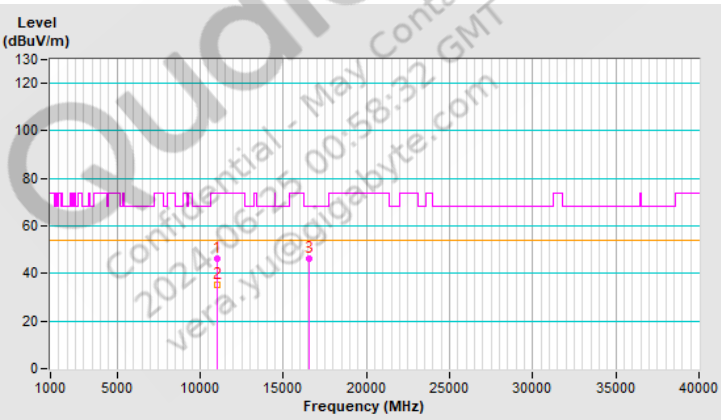


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80)	**Channel**	CH 106：5530 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11060.00	46.1 PK	74.0	-27.9	1.12 V	164	33.8	12.3
2	11060.00	35.7 AV	54.0	-18.3	1.12 V	164	23.4	12.3
3	#16590.00	46.2 PK	68.2	-22.0	1.16 V	151	31.7	14.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

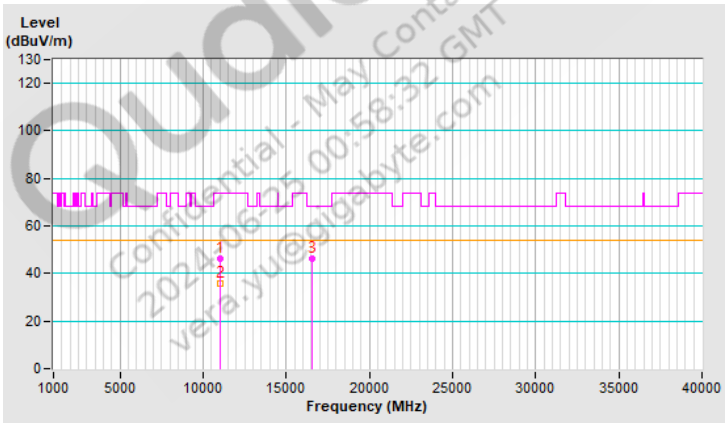


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80)	**Channel**	CH 122：5610 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11220.00	46.7 PK	74.0	-27.3	1.13 H	219	34.6	12.1
2	11220.00	36.0 AV	54.0	-18.0	1.13 H	219	23.9	12.1
3	#16830.00	46.1 PK	68.2	-22.1	1.25 H	184	30.6	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

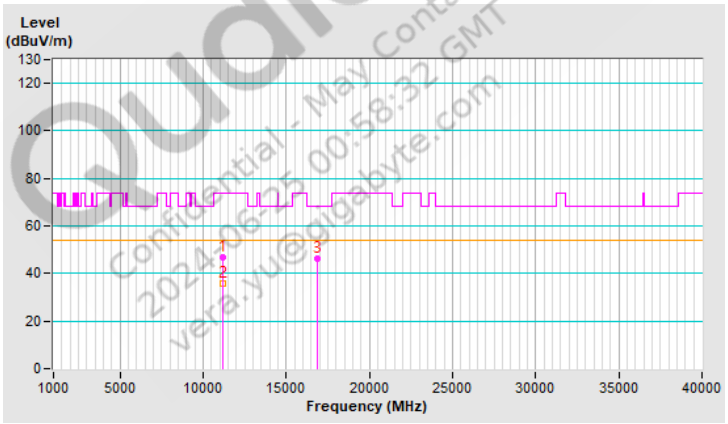


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80)	Channel	CH 122：5610 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11220.00	45.7 PK	74.0	-28.3	1.07 V	179	33.6	12.1
2	11220.00	35.3 AV	54.0	-18.7	1.07 V	179	23.2	12.1
3	#16830.00	46.0 PK	68.2	-22.2	1.18 V	157	30.5	15.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

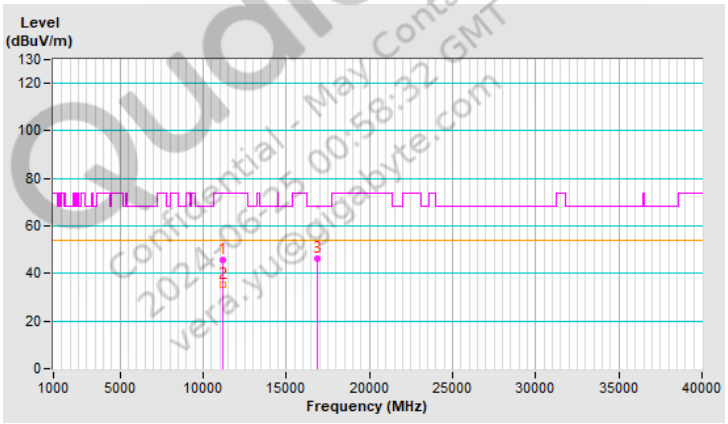


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80)	**Channel**	CH 138：5690 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11380.00	46.0 PK	74.0	-28.0	1.17 H	211	33.3	12.7
2	11380.00	35.6 AV	54.0	-18.4	1.17 H	211	22.9	12.7
3	#17070.00	45.8 PK	68.2	-22.4	1.22 H	188	29.5	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

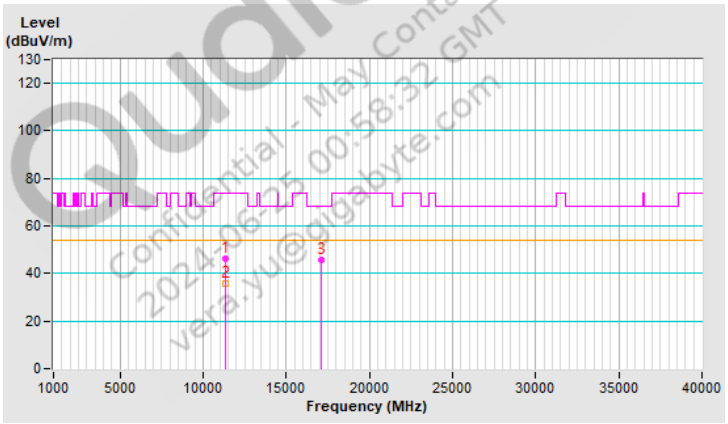


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80)	Channel	CH 138：5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	46.1 PK	74.0	-27.9	1.05 V	187	33.4	12.7
2	11380.00	35.5 AV	54.0	-18.5	1.05 V	187	22.8	12.7
3	#17070.00	46.4 PK	68.2	-21.8	1.21 V	138	30.1	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

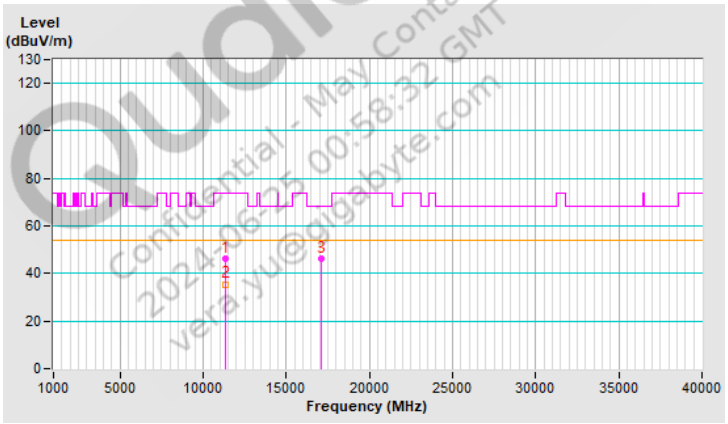


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80)	**Channel**	CH 155：5775 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11550.00	45.9 PK	74.0	-28.1	1.19 H	199	33.2	12.7
2	11550.00	35.1 AV	54.0	-18.9	1.19 H	199	22.4	12.7
3	#17325.00	45.5 PK	68.2	-22.7	1.28 H	183	28.5	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

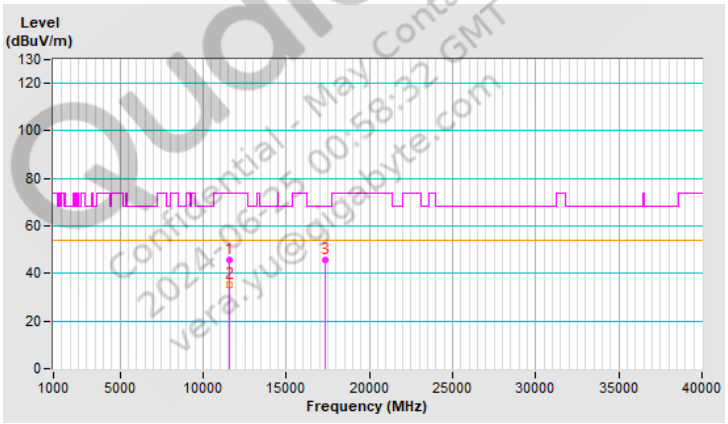


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80)	Channel	CH 155：5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	46.1 PK	74.0	-27.9	1.12 V	174	33.4	12.7
2	11550.00	35.7 AV	54.0	-18.3	1.12 V	174	23.0	12.7
3	#17325.00	45.4 PK	68.2	-22.8	1.18 V	159	28.4	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

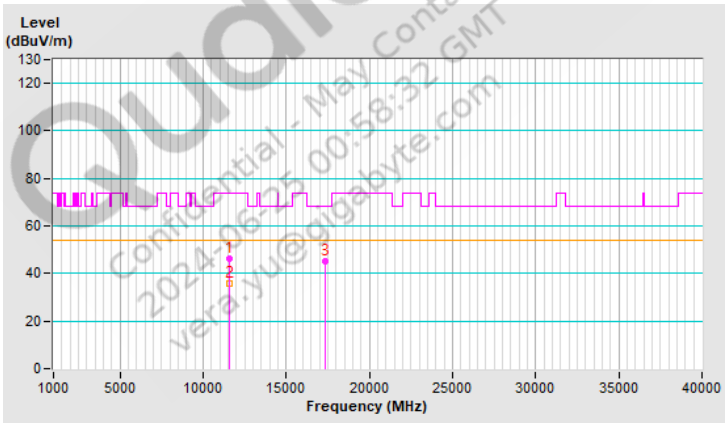


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT160)	**Channel**	CH 50：5250 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10500.00	46.3 PK	68.2	-21.9	1.14 H	197	34.5	11.8
2	15750.00	46.0 PK	74.0	-28.0	1.21 H	177	34.6	11.4
3	15750.00	34.6 AV	54.0	-19.4	1.21 H	177	23.2	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

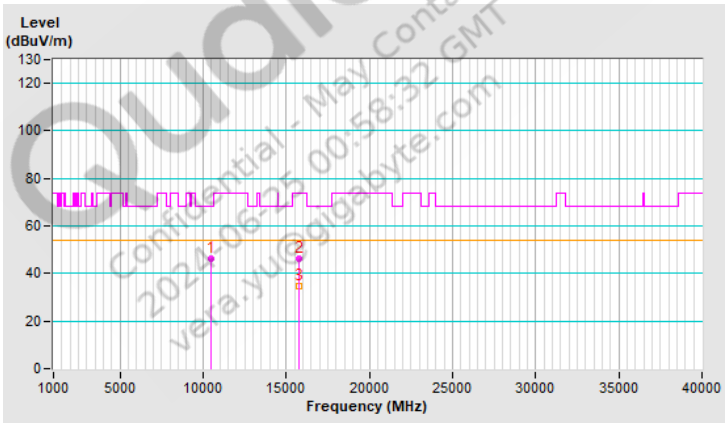


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT160)	**Channel**	CH 50：5250 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10500.00	46.1 PK	68.2	-22.1	1.06 V	184	34.3	11.8
2	15750.00	46.1 PK	74.0	-27.9	1.20 V	140	34.7	11.4
3	15750.00	34.8 AV	54.0	-19.2	1.20 V	140	23.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

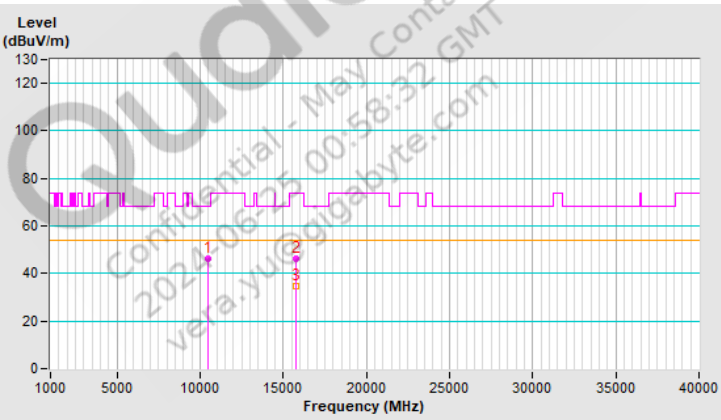


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT160)	Channel	CH 114：5570 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11140.00	46.1 PK	74.0	-27.9	1.11 H	211	34.0	12.1
2	11140.00	35.2 AV	54.0	-18.8	1.11 H	211	23.1	12.1
3	#16710.00	46.2 PK	68.2	-22.0	1.27 H	170	31.3	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

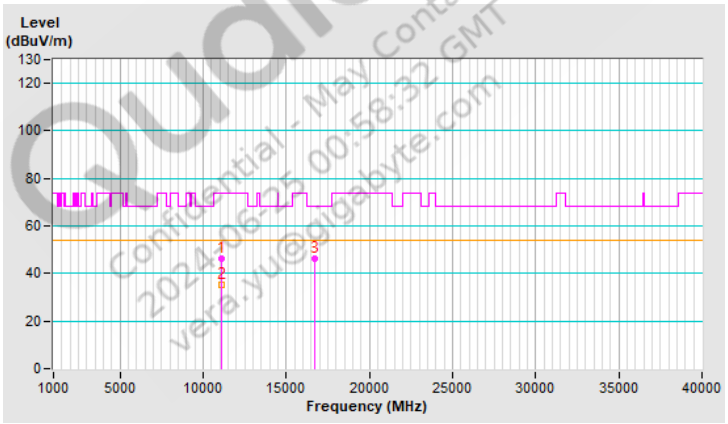


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT160)	**Channel**	CH 114：5570 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11140.00	46.5 PK	74.0	-27.5	1.06 V	190	34.4	12.1
2	11140.00	35.8 AV	54.0	-18.2	1.06 V	190	23.7	12.1
3	#16710.00	45.5 PK	68.2	-22.7	1.20 V	162	30.6	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

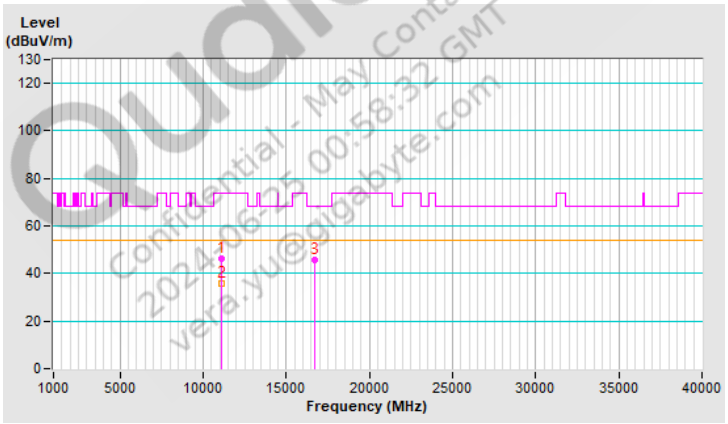


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	**Channel**	CH 36：5180 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10360.00	46.2 PK	68.2	-22.0	1.06 H	179	34.6	11.6
2	15540.00	46.2 PK	74.0	-27.8	1.26 H	213	34.4	11.8
3	15540.00	34.9 AV	54.0	-19.1	1.26 H	213	23.1	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

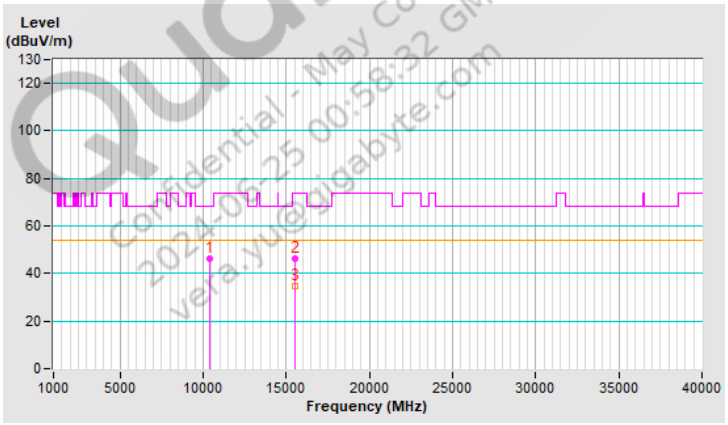


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	**Channel**	CH 36：5180 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10360.00	45.7 PK	68.2	-22.5	1.11 V	193	34.1	11.6
2	15540.00	46.1 PK	74.0	-27.9	1.04 V	180	34.3	11.8
3	15540.00	34.4 AV	54.0	-19.6	1.04 V	180	22.6	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

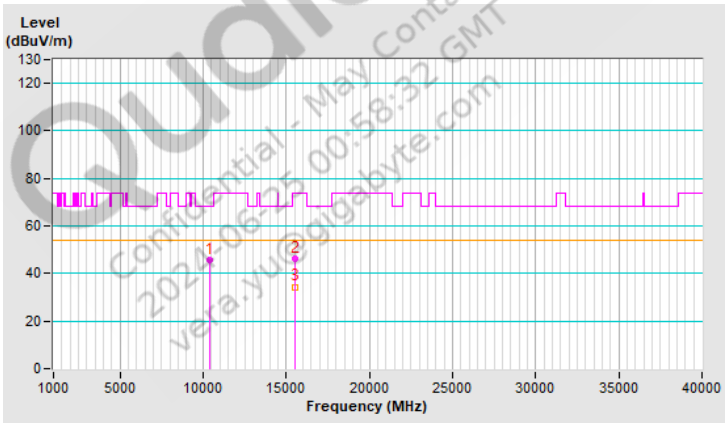


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	46.1 PK	68.2	-22.1	1.00 H	176	34.3	11.8
2	15600.00	46.3 PK	74.0	-27.7	1.24 H	221	34.6	11.7
3	15600.00	34.6 AV	54.0	-19.4	1.24 H	221	22.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

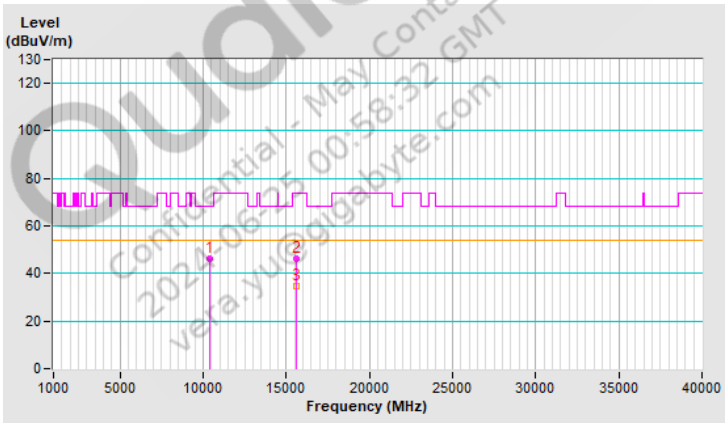


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	**Channel**	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10400.00	46.5 PK	68.2	-21.7	1.12 V	185	34.7	11.8
2	15600.00	46.0 PK	74.0	-28.0	1.04 V	189	34.3	11.7
3	15600.00	34.6 AV	54.0	-19.4	1.04 V	189	22.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

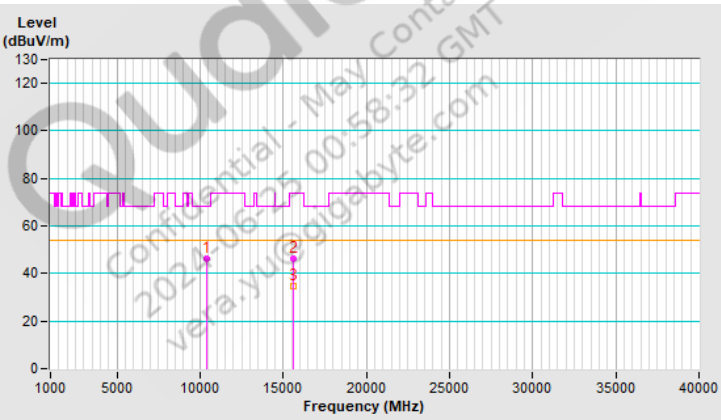


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	**Channel**	CH 48：5240 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10480.00	46.2 PK	68.2	-22.0	1.07 H	181	34.4	11.8
2	15720.00	45.7 PK	74.0	-28.3	1.29 H	219	34.1	11.6
3	15720.00	34.5 AV	54.0	-19.5	1.29 H	219	22.9	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

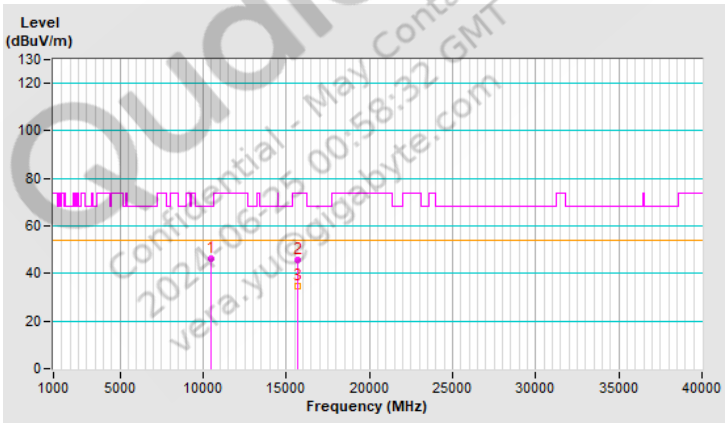


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	**Channel**	CH 48：5240 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10480.00	45.8 PK	68.2	-22.4	1.06 V	186	34.0	11.8
2	15720.00	45.5 PK	74.0	-28.5	1.05 V	172	33.9	11.6
3	15720.00	34.1 AV	54.0	-19.9	1.05 V	172	22.5	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

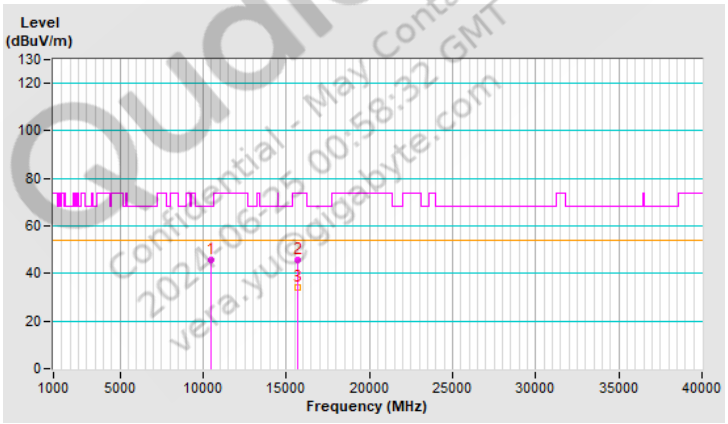


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	**Channel**	CH 52：5260 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10520.00	45.8 PK	68.2	-22.4	1.07 H	185	34.1	11.7
2	15780.00	46.2 PK	74.0	-27.8	1.21 H	210	34.9	11.3
3	15780.00	34.8 AV	54.0	-19.2	1.21 H	210	23.5	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

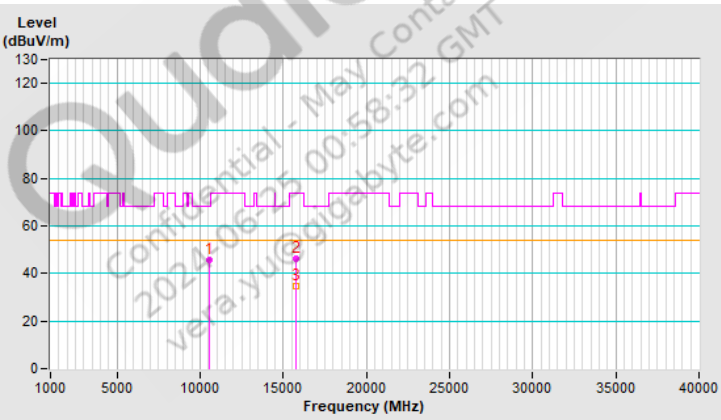


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 52：5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	46.0 PK	68.2	-22.2	1.15 V	192	34.3	11.7
2	15780.00	45.5 PK	74.0	-28.5	1.07 V	192	34.2	11.3
3	15780.00	34.1 AV	54.0	-19.9	1.07 V	192	22.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

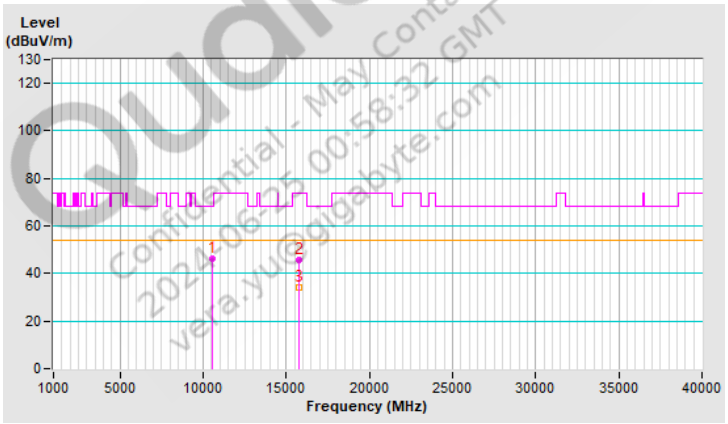


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 60：5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	46.7 PK	74.0	-27.3	1.06 H	189	35.0	11.7
2	10600.00	35.9 AV	54.0	-18.1	1.06 H	189	24.2	11.7
3	15900.00	45.7 PK	74.0	-28.3	1.22 H	217	34.7	11.0
4	15900.00	34.2 AV	54.0	-19.8	1.22 H	217	23.2	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

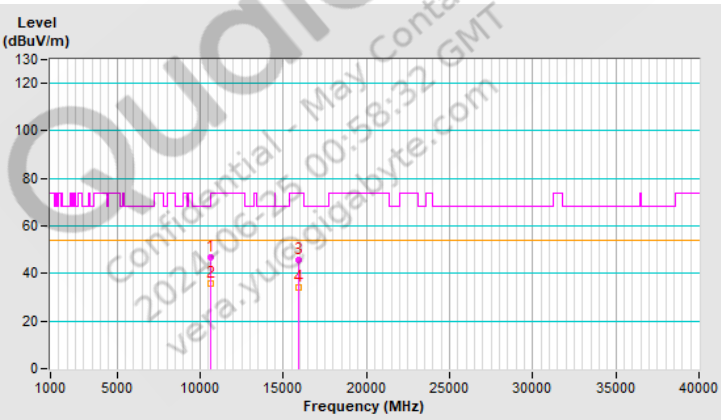


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 60：5300 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10600.00	46.6 PK	74.0	-27.4	1.06 V	203	34.9	11.7
2	10600.00	35.9 AV	54.0	-18.1	1.06 V	203	24.2	11.7
3	15900.00	46.5 PK	74.0	-27.5	1.10 V	191	35.5	11.0
4	15900.00	34.9 AV	54.0	-19.1	1.10 V	191	23.9	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

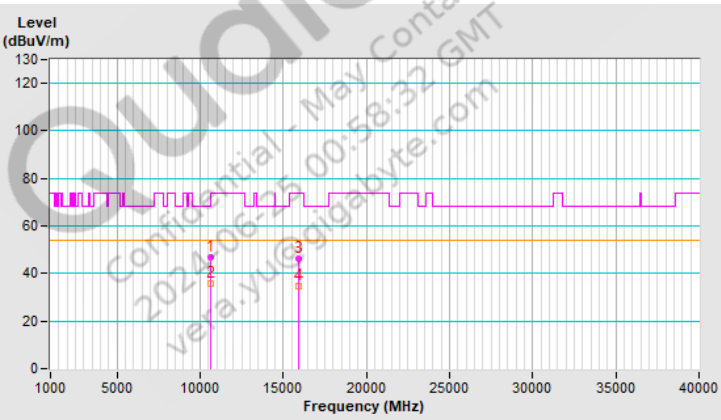


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	**Channel**	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10640.00	46.4 PK	74.0	-27.6	1.02 H	182	34.7	11.7
2	10640.00	35.7 AV	54.0	-18.3	1.02 H	182	24.0	11.7
3	15960.00	46.6 PK	74.0	-27.4	1.28 H	218	35.3	11.3
4	15960.00	34.9 AV	54.0	-19.1	1.28 H	218	23.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

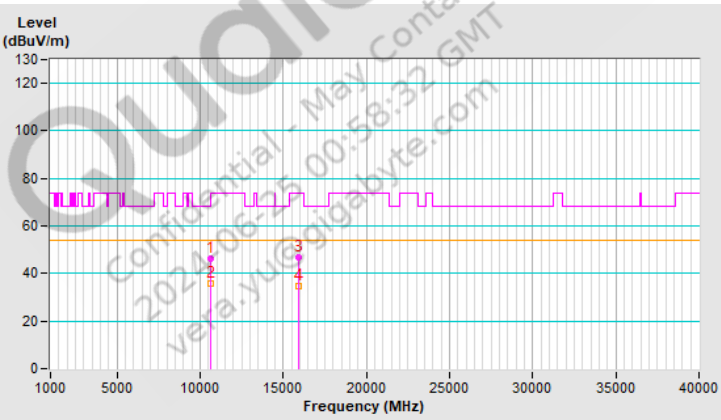


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	46.3 PK	74.0	-27.7	1.09 V	207	34.6	11.7
2	10640.00	35.4 AV	54.0	-18.6	1.09 V	207	23.7	11.7
3	15960.00	45.4 PK	74.0	-28.6	1.01 V	168	34.1	11.3
4	15960.00	34.1 AV	54.0	-19.9	1.01 V	168	22.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

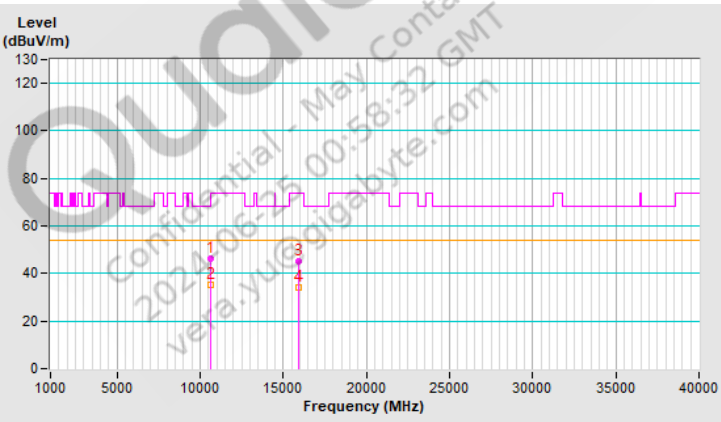


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	**Channel**	CH 100：5500 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11000.00	46.7 PK	74.0	-27.3	1.08 H	202	34.3	12.4
2	11000.00	35.9 AV	54.0	-18.1	1.08 H	202	23.5	12.4
3	#16500.00	45.4 PK	68.2	-22.8	1.27 H	223	31.7	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

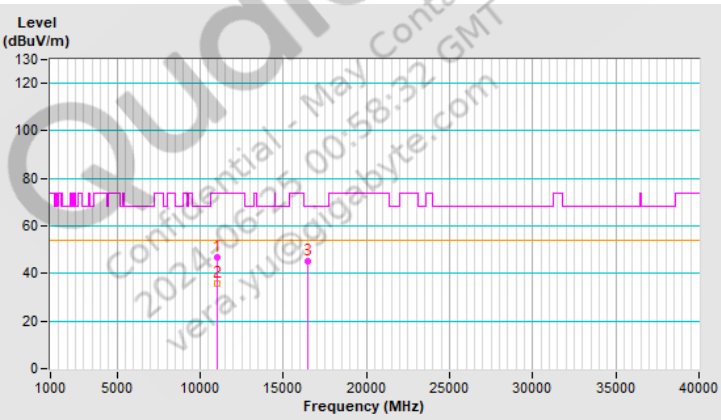


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	**Channel**	CH 100：5500 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11000.00	46.4 PK	74.0	-27.6	1.09 V	186	34.0	12.4
2	11000.00	35.5 AV	54.0	-18.5	1.09 V	186	23.1	12.4
3	#16500.00	45.7 PK	68.2	-22.5	1.02 V	176	32.0	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

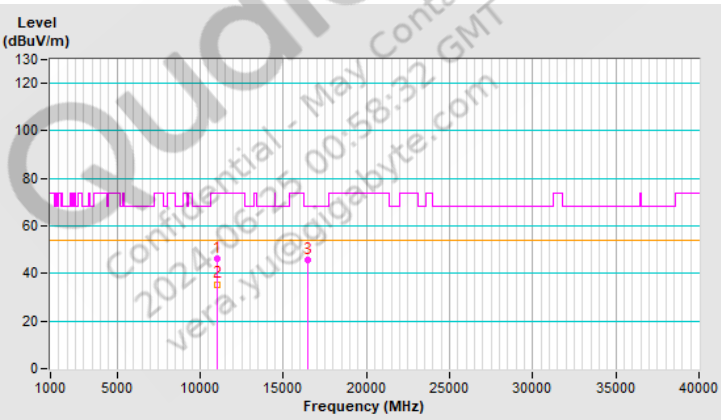


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	45.7 PK	74.0	-28.3	1.00 H	174	33.7	12.0
2	11160.00	35.2 AV	54.0	-18.8	1.00 H	174	23.2	12.0
3	#16740.00	46.2 PK	68.2	-22.0	1.22 H	203	31.0	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

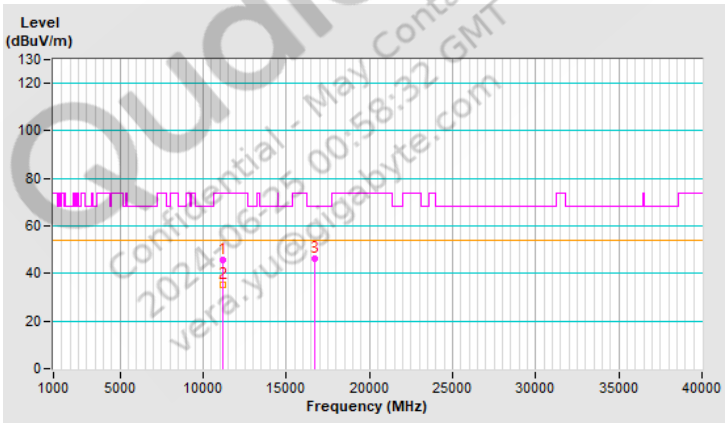


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	**Channel**	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11160.00	45.9 PK	74.0	-28.1	1.06 V	189	33.9	12.0
2	11160.00	35.2 AV	54.0	-18.8	1.06 V	189	23.2	12.0
3	#16740.00	45.7 PK	68.2	-22.5	1.01 V	180	30.5	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

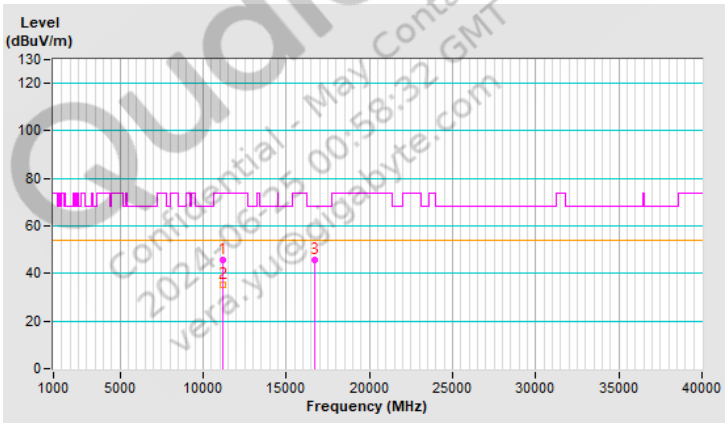


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140：5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	46.2 PK	74.0	-27.8	1.01 H	186	33.5	12.7
2	11400.00	35.5 AV	54.0	-18.5	1.01 H	186	22.8	12.7
3	#17100.00	46.2 PK	68.2	-22.0	1.28 H	213	29.9	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

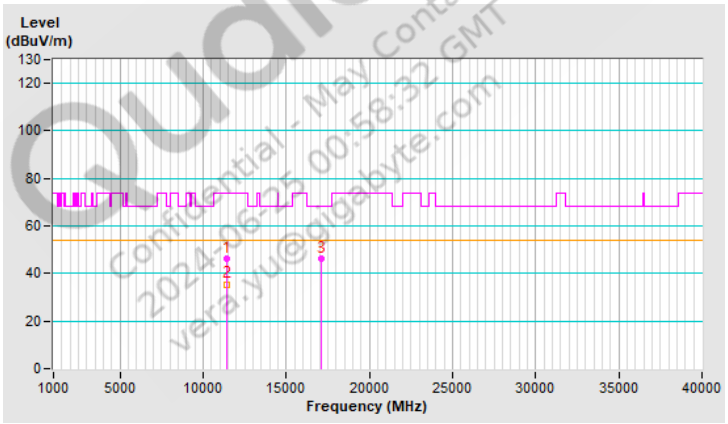


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 140：5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	46.3 PK	74.0	-27.7	1.12 V	193	33.6	12.7
2	11400.00	35.7 AV	54.0	-18.3	1.12 V	193	23.0	12.7
3	#17100.00	46.4 PK	68.2	-21.8	1.07 V	188	30.1	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

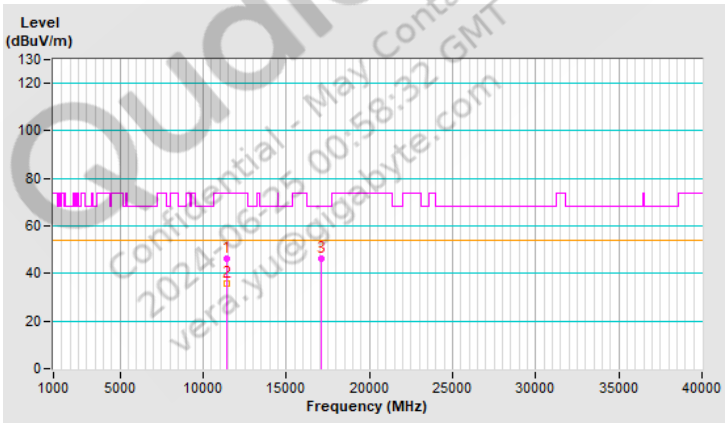


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	**Channel**	CH 144：5720 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11440.00	46.3 PK	74.0	-27.7	1.00 H	193	33.6	12.7
2	11440.00	35.4 AV	54.0	-18.6	1.00 H	193	22.7	12.7
3	#17160.00	46.0 PK	68.2	-22.2	1.26 H	205	29.7	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

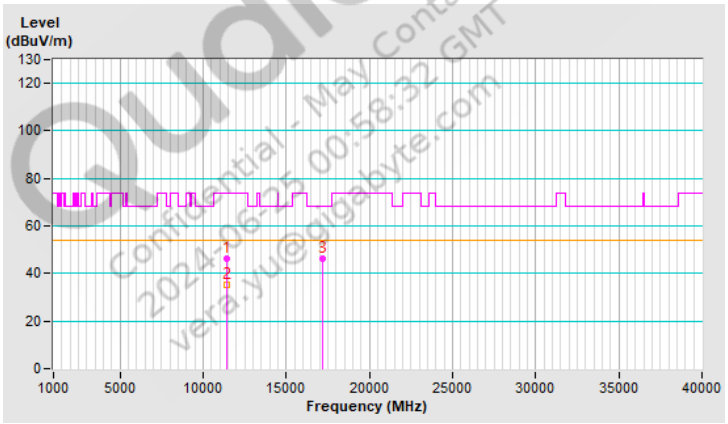


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	**Channel**	CH 144：5720 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11440.00	46.0 PK	74.0	-28.0	1.11 V	206	33.3	12.7
2	11440.00	35.3 AV	54.0	-18.7	1.11 V	206	22.6	12.7
3	#17160.00	46.7 PK	68.2	-21.5	1.01 V	183	30.4	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

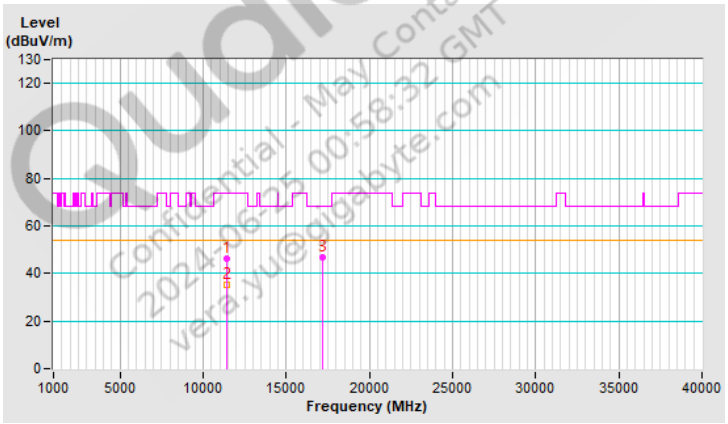


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	**Channel**	CH 149：5745 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11490.00	46.4 PK	74.0	-27.6	1.04 H	185	33.6	12.8
2	11490.00	35.7 AV	54.0	-18.3	1.04 H	185	22.9	12.8
3	#17235.00	46.5 PK	68.2	-21.7	1.27 H	227	30.0	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

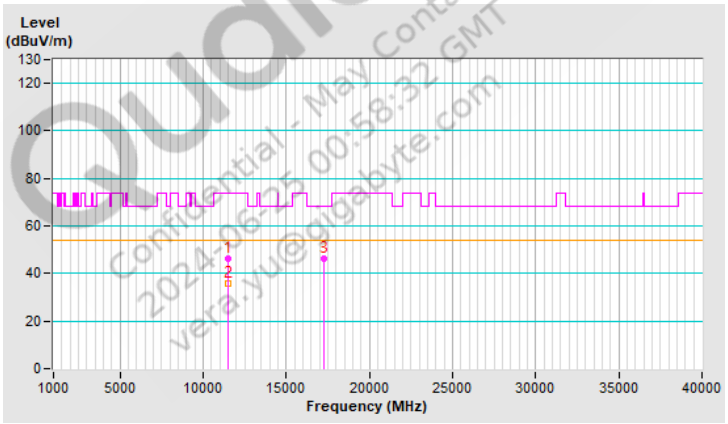


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 149：5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	46.4 PK	74.0	-27.6	1.07 V	189	33.6	12.8
2	11490.00	36.0 AV	54.0	-18.0	1.07 V	189	23.2	12.8
3	#17235.00	45.9 PK	68.2	-22.3	1.05 V	169	29.4	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

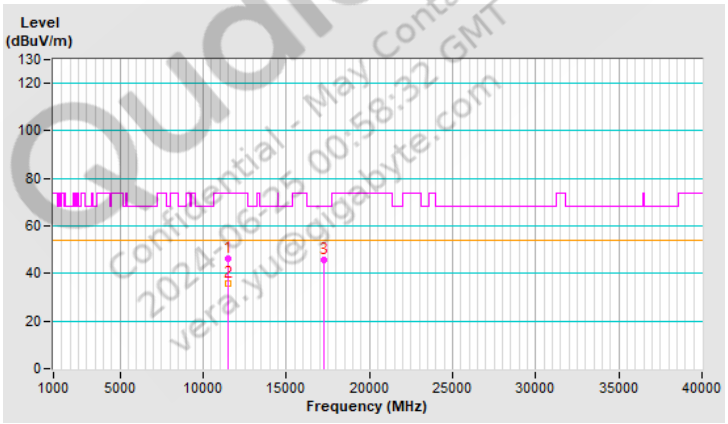


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 157：5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	46.0 PK	74.0	-28.0	1.04 H	173	33.3	12.7
2	11570.00	35.2 AV	54.0	-18.8	1.04 H	173	22.5	12.7
3	#17355.00	45.9 PK	68.2	-22.3	1.22 H	204	28.5	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

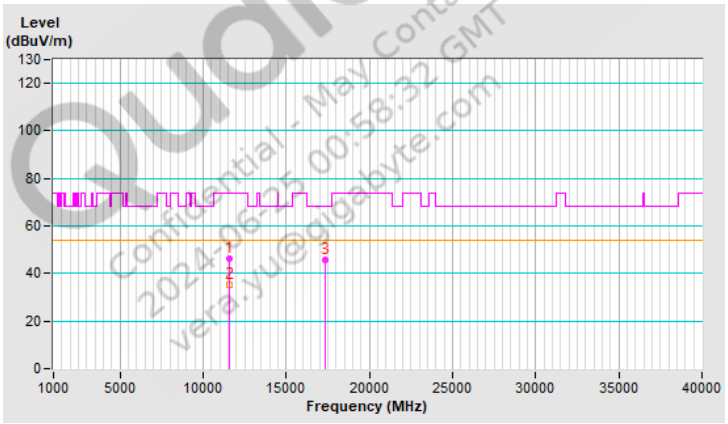


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 157：5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	46.3 PK	74.0	-27.7	1.10 V	180	33.6	12.7
2	11570.00	35.9 AV	54.0	-18.1	1.10 V	180	23.2	12.7
3	#17355.00	45.9 PK	68.2	-22.3	1.10 V	174	28.5	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

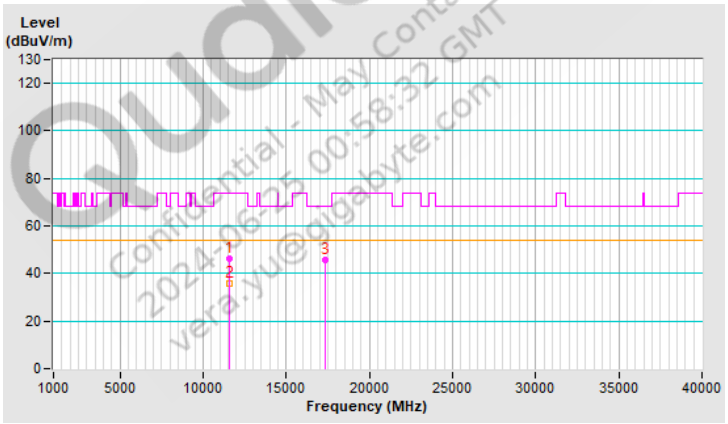


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	Channel	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	46.6 PK	74.0	-27.4	1.02 H	174	34.1	12.5
2	11650.00	35.8 AV	54.0	-18.2	1.02 H	174	23.3	12.5
3	#17475.00	45.8 PK	68.2	-22.4	1.28 H	220	27.1	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

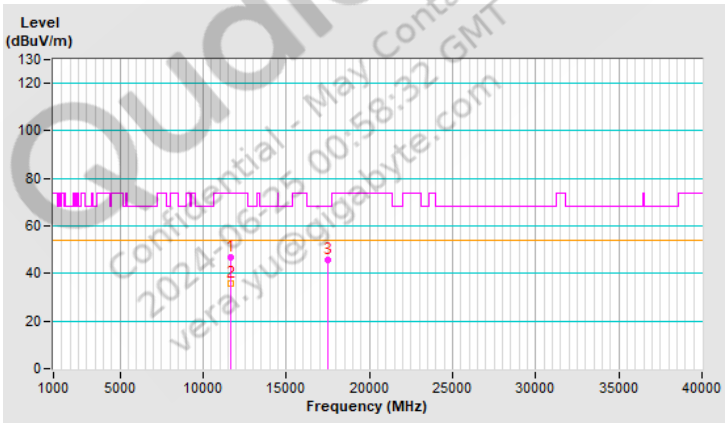


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 26-tone RU	**Channel**	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11650.00	45.7 PK	74.0	-28.3	1.10 V	190	33.2	12.5
2	11650.00	35.2 AV	54.0	-18.8	1.10 V	190	22.7	12.5
3	#17475.00	45.6 PK	68.2	-22.6	1.08 V	192	26.9	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

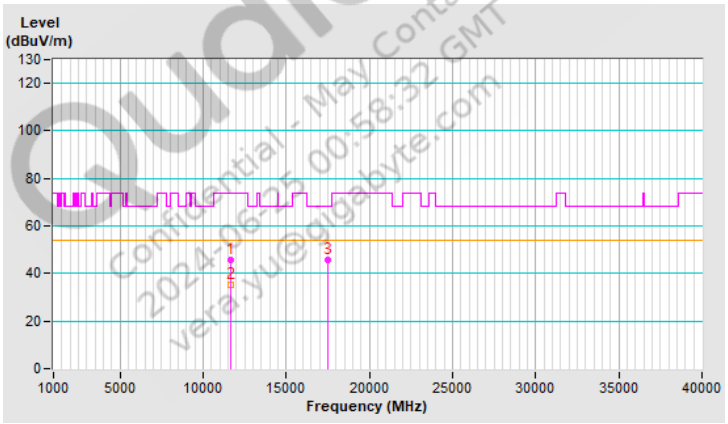


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 36：5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	46.2 PK	68.2	-22.0	1.06 H	166	34.6	11.6
2	15540.00	46.1 PK	74.0	-27.9	1.33 H	217	34.3	11.8
3	15540.00	34.5 AV	54.0	-19.5	1.33 H	217	22.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

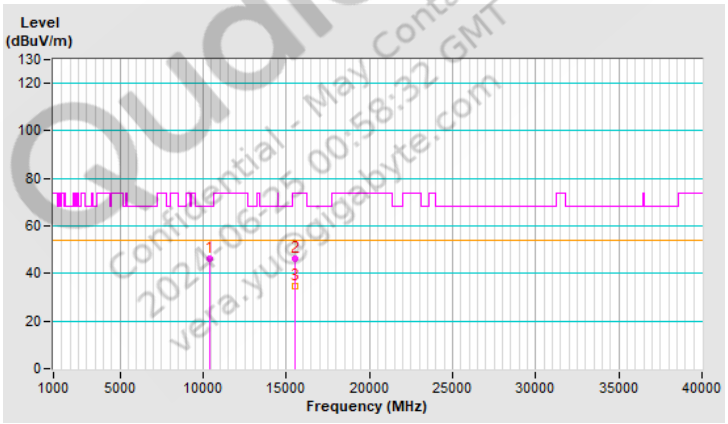


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 36：5180 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10360.00	46.6 PK	68.2	-21.6	1.12 V	207	35.0	11.6
2	15540.00	46.4 PK	74.0	-27.6	1.08 V	166	34.6	11.8
3	15540.00	34.9 AV	54.0	-19.1	1.08 V	166	23.1	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

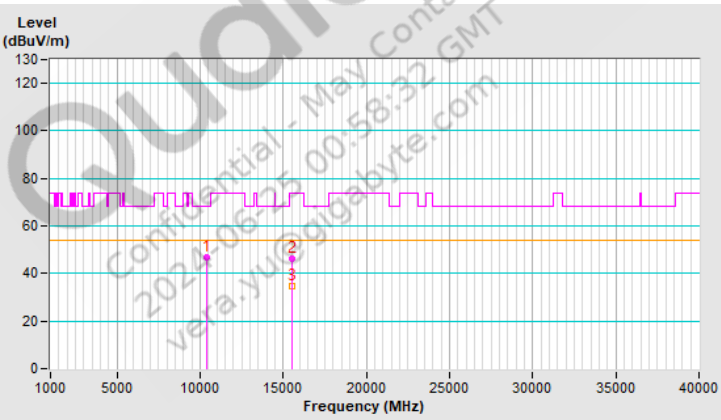


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	46.0 PK	68.2	-22.2	1.05 H	189	34.2	11.8
2	15600.00	46.0 PK	74.0	-28.0	1.24 H	211	34.3	11.7
3	15600.00	34.5 AV	54.0	-19.5	1.24 H	211	22.8	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

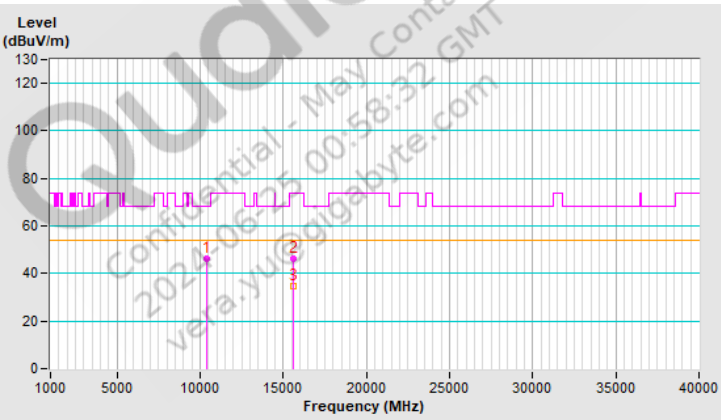


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	46.0 PK	68.2	-22.2	1.11 V	204	34.2	11.8
2	15600.00	46.5 PK	74.0	-27.5	1.07 V	192	34.8	11.7
3	15600.00	35.0 AV	54.0	-19.0	1.07 V	192	23.3	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

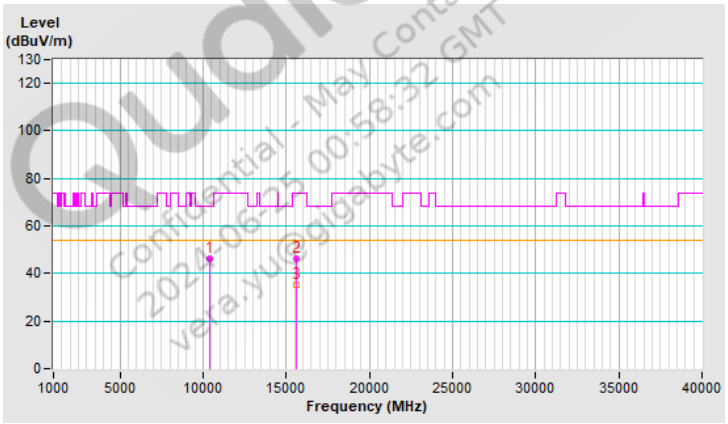


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 48：5240 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10480.00	46.1 PK	68.2	-22.1	1.00 H	159	34.3	11.8
2	15720.00	45.6 PK	74.0	-28.4	1.26 H	212	34.0	11.6
3	15720.00	34.3 AV	54.0	-19.7	1.26 H	212	22.7	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

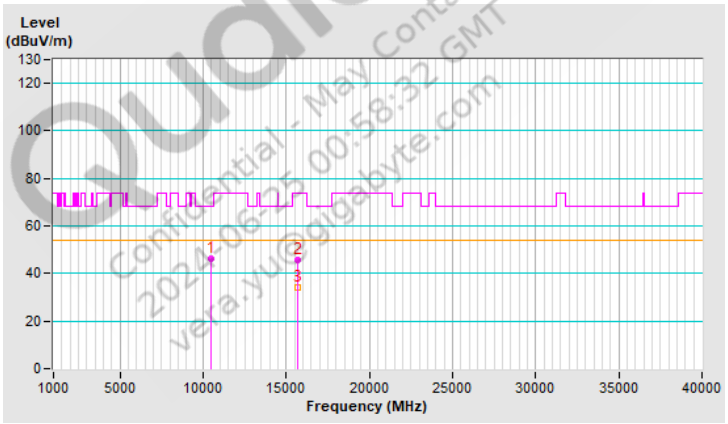


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 48：5240 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10480.00	46.4 PK	68.2	-21.8	1.06 V	209	34.6	11.8
2	15720.00	46.0 PK	74.0	-28.0	1.05 V	177	34.4	11.6
3	15720.00	34.8 AV	54.0	-19.2	1.05 V	177	23.2	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

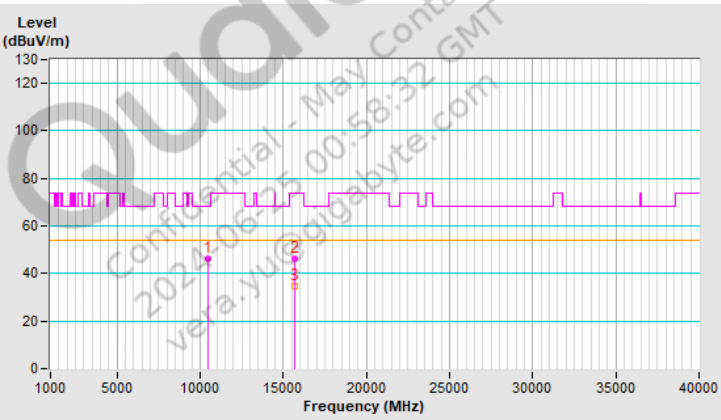


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 52：5260 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10520.00	46.1 PK	68.2	-22.1	1.03 H	183	34.4	11.7
2	15780.00	46.3 PK	74.0	-27.7	1.30 H	210	35.0	11.3
3	15780.00	34.8 AV	54.0	-19.2	1.30 H	210	23.5	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

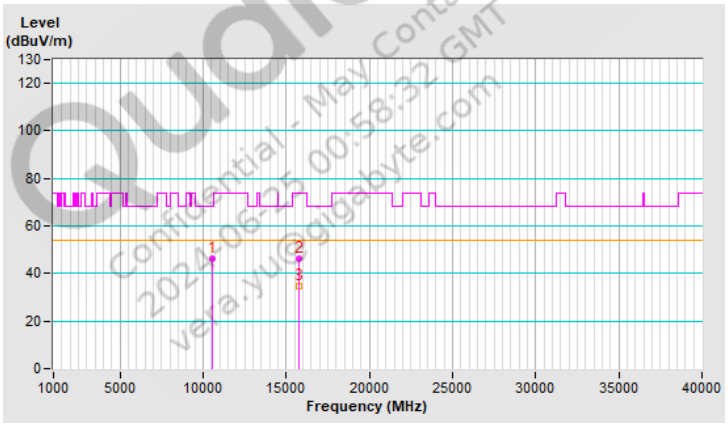


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 52：5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	46.2 PK	68.2	-22.0	1.09 V	193	34.5	11.7
2	15780.00	46.0 PK	74.0	-28.0	1.04 V	188	34.7	11.3
3	15780.00	34.3 AV	54.0	-19.7	1.04 V	188	23.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

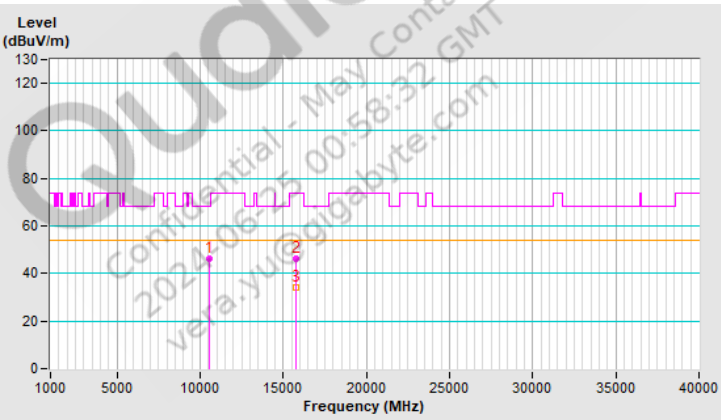


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 60：5300 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10600.00	45.7 PK	74.0	-28.3	1.07 H	169	34.0	11.7
2	10600.00	35.1 AV	54.0	-18.9	1.07 H	169	23.4	11.7
3	15900.00	46.2 PK	74.0	-27.8	1.23 H	210	35.2	11.0
4	15900.00	34.6 AV	54.0	-19.4	1.23 H	210	23.6	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

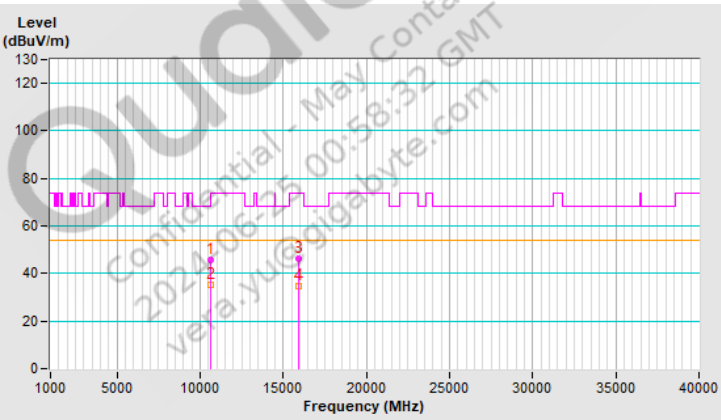


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 60：5300 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10600.00	46.7 PK	74.0	-27.3	1.13 V	178	35.0	11.7
2	10600.00	36.0 AV	54.0	-18.0	1.13 V	178	24.3	11.7
3	15900.00	46.4 PK	74.0	-27.6	1.08 V	167	35.4	11.0
4	15900.00	35.0 AV	54.0	-19.0	1.08 V	167	24.0	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

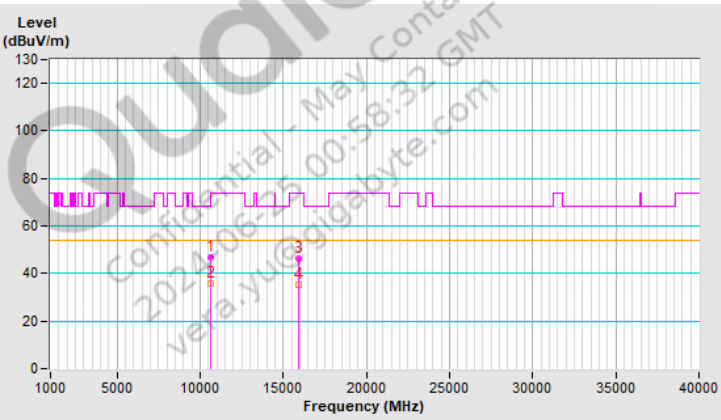


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10640.00	46.1 PK	74.0	-27.9	1.00 H	178	34.4	11.7
2	10640.00	35.3 AV	54.0	-18.7	1.00 H	178	23.6	11.7
3	15960.00	45.7 PK	74.0	-28.3	1.23 H	207	34.4	11.3
4	15960.00	34.5 AV	54.0	-19.5	1.23 H	207	23.2	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

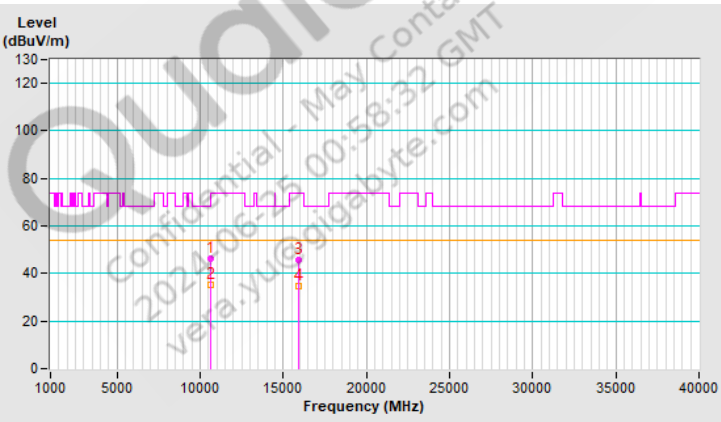


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10640.00	45.6 PK	74.0	-28.4	1.15 V	206	33.9	11.7
2	10640.00	35.2 AV	54.0	-18.8	1.15 V	206	23.5	11.7
3	15960.00	46.3 PK	74.0	-27.7	1.02 V	184	35.0	11.3
4	15960.00	34.9 AV	54.0	-19.1	1.02 V	184	23.6	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

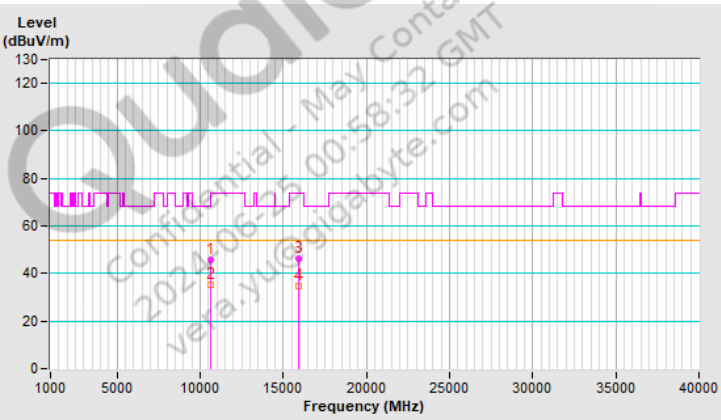


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 100：5500 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11000.00	48.2 PK	74.0	-25.8	1.04 H	180	35.8	12.4
2	11000.00	39.9 AV	54.0	-14.1	1.04 H	180	27.5	12.4
3	#16500.00	45.3 PK	68.2	-22.9	1.28 H	229	31.6	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

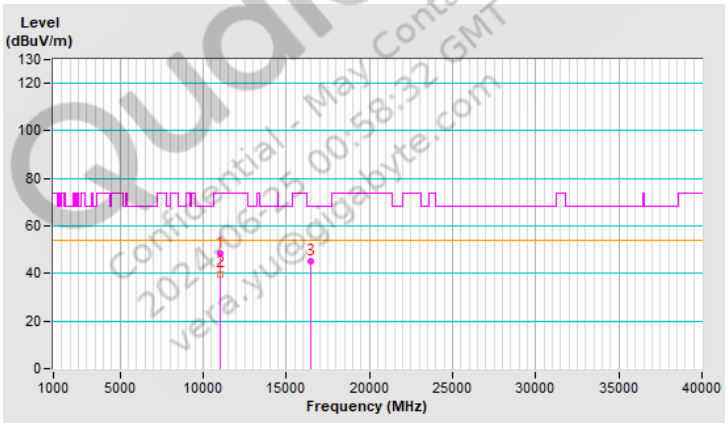


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 100：5500 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11000.00	42.7 PK	74.0	-31.3	1.13 V	190	30.3	12.4
2	11000.00	38.2 AV	54.0	-15.8	1.13 V	190	25.8	12.4
3	#16500.00	47.2 PK	68.2	-21.0	1.07 V	173	33.5	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

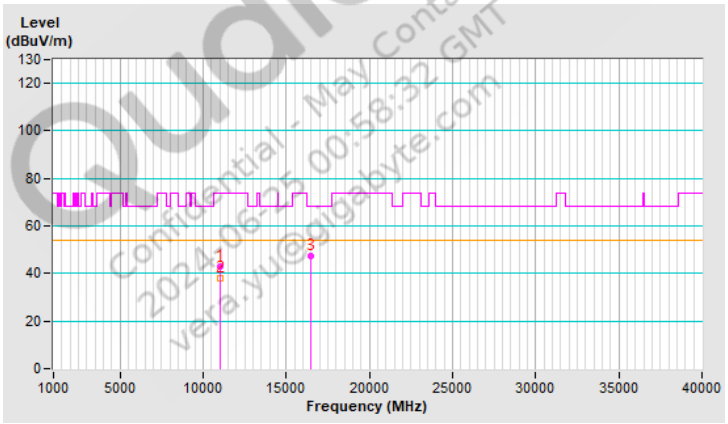


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11160.00	46.7 PK	74.0	-27.3	1.07 H	165	34.7	12.0
2	11160.00	35.8 AV	54.0	-18.2	1.07 H	165	23.8	12.0
3	#16740.00	45.9 PK	68.2	-22.3	1.25 H	214	30.7	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

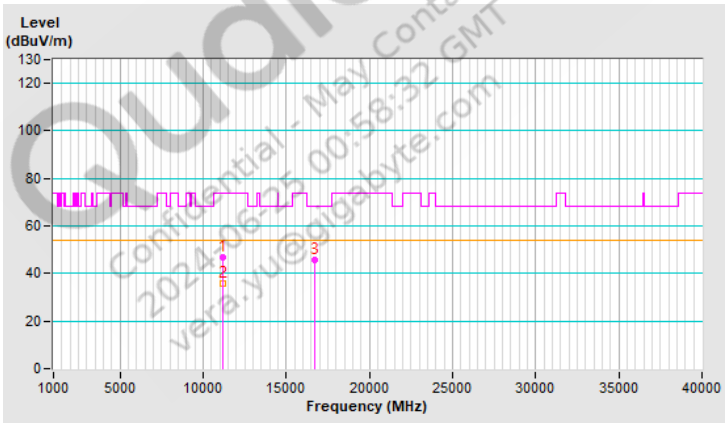


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11160.00	46.8 PK	74.0	-27.2	1.15 V	183	34.8	12.0
2	11160.00	36.0 AV	54.0	-18.0	1.15 V	183	24.0	12.0
3	#16740.00	46.4 PK	68.2	-21.8	1.01 V	190	31.2	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

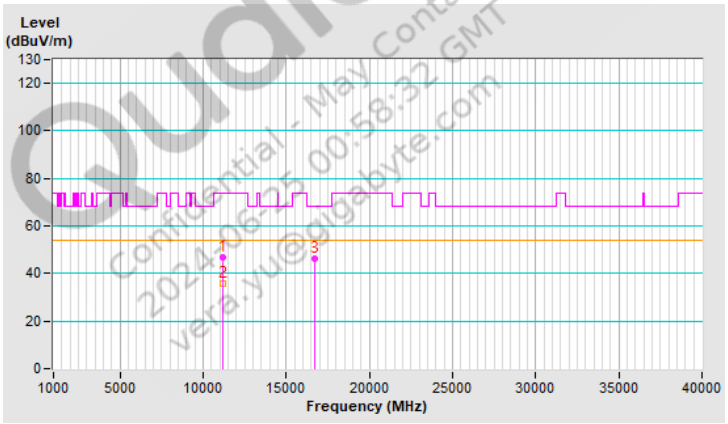


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 140：5700 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11400.00	46.4 PK	74.0	-27.6	1.00 H	164	33.7	12.7
2	11400.00	36.0 AV	54.0	-18.0	1.00 H	164	23.3	12.7
3	#17100.00	45.9 PK	68.2	-22.3	1.22 H	213	29.6	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

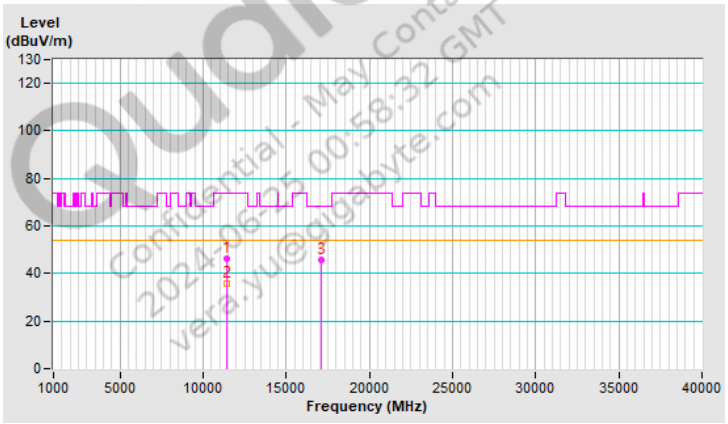


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 140：5700 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11400.00	46.2 PK	74.0	-27.8	1.12 V	205	33.5	12.7
2	11400.00	35.4 AV	54.0	-18.6	1.12 V	205	22.7	12.7
3	#17100.00	45.6 PK	68.2	-22.6	1.02 V	177	29.3	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

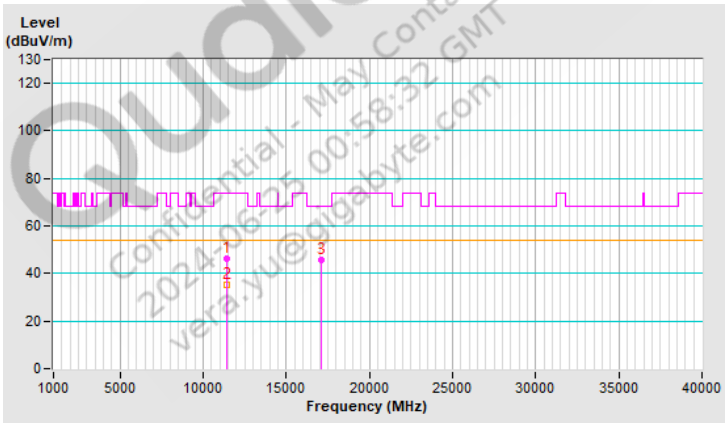


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 144：5720 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11440.00	46.7 PK	74.0	-27.3	1.04 H	188	34.0	12.7
2	11440.00	35.9 AV	54.0	-18.1	1.04 H	188	23.2	12.7
3	#17160.00	45.9 PK	68.2	-22.3	1.29 H	236	29.6	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

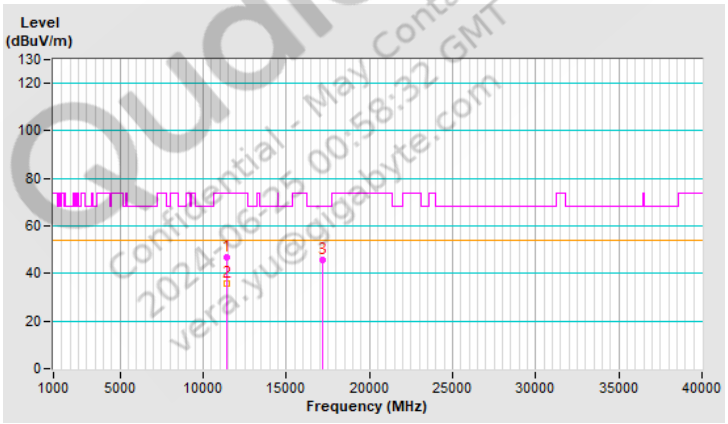


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 144：5720 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11440.00	45.8 PK	74.0	-28.2	1.06 V	177	33.1	12.7
2	11440.00	35.1 AV	54.0	-18.9	1.06 V	177	22.4	12.7
3	#17160.00	45.6 PK	68.2	-22.6	1.01 V	184	29.3	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

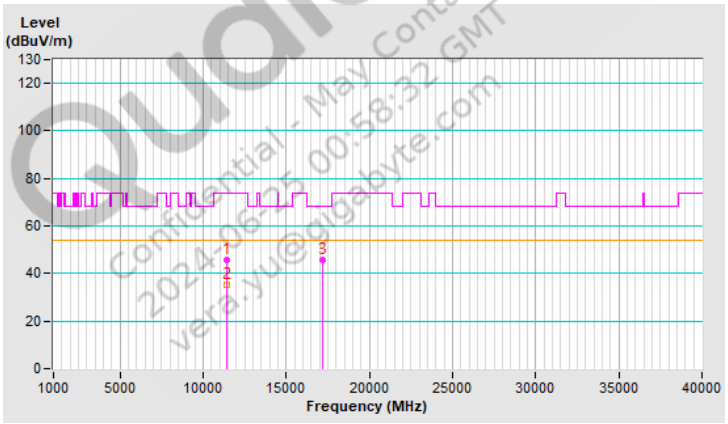


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 149：5745 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11490.00	46.1 PK	74.0	-27.9	1.08 H	189	33.3	12.8
2	11490.00	35.4 AV	54.0	-18.6	1.08 H	189	22.6	12.8
3	#17235.00	46.7 PK	68.2	-21.5	1.24 H	226	30.2	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

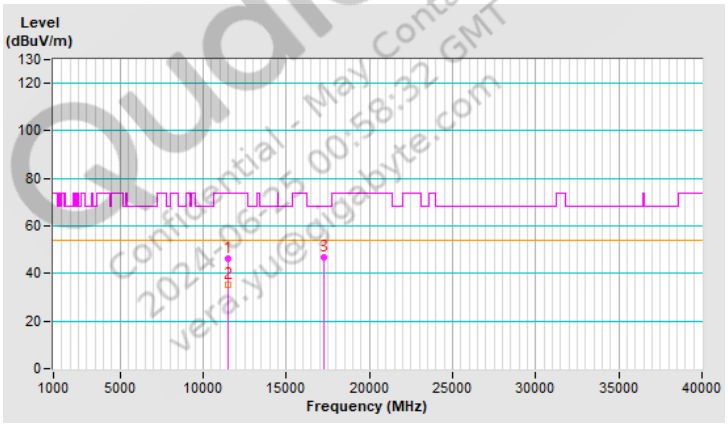


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 149：5745 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11490.00	46.3 PK	74.0	-27.7	1.12 V	206	33.5	12.8
2	11490.00	35.4 AV	54.0	-18.6	1.12 V	206	22.6	12.8
3	#17235.00	46.4 PK	68.2	-21.8	1.04 V	184	29.9	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

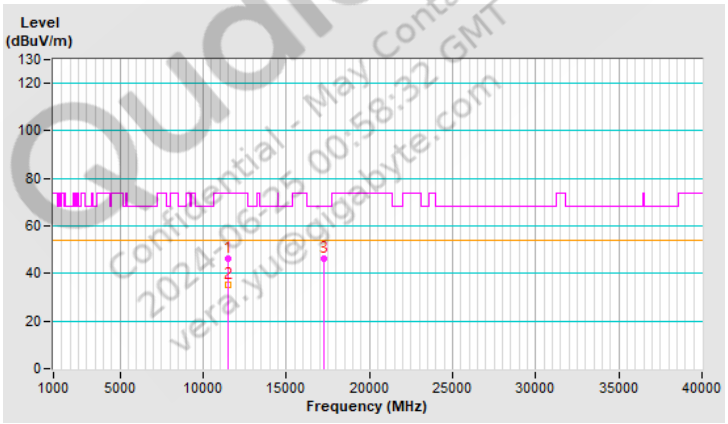


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	**Channel**	CH 157：5785 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11570.00	46.0 PK	74.0	-28.0	1.07 H	180	33.3	12.7
2	11570.00	35.6 AV	54.0	-18.4	1.07 H	180	22.9	12.7
3	#17355.00	46.4 PK	68.2	-21.8	1.26 H	222	29.0	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

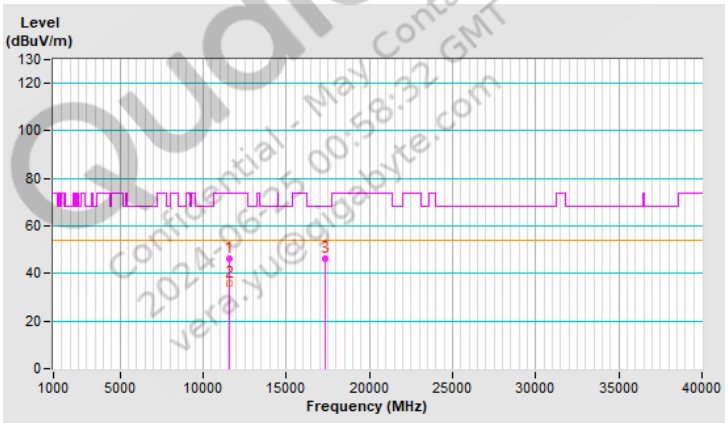


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
verajyu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 157：5785 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11570.00	45.8 PK	74.0	-28.2	1.10 V	194	33.1	12.7
2	11570.00	35.4 AV	54.0	-18.6	1.10 V	194	22.7	12.7
3	#17355.00	46.7 PK	68.2	-21.5	1.06 V	171	29.3	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

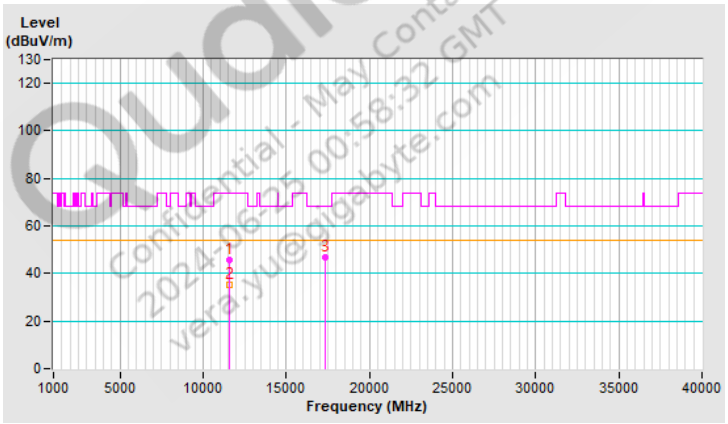


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	45.8 PK	74.0	-28.2	1.02 H	185	33.3	12.5
2	11650.00	35.1 AV	54.0	-18.9	1.02 H	185	22.6	12.5
3	#17475.00	46.1 PK	68.2	-22.1	1.26 H	232	27.4	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

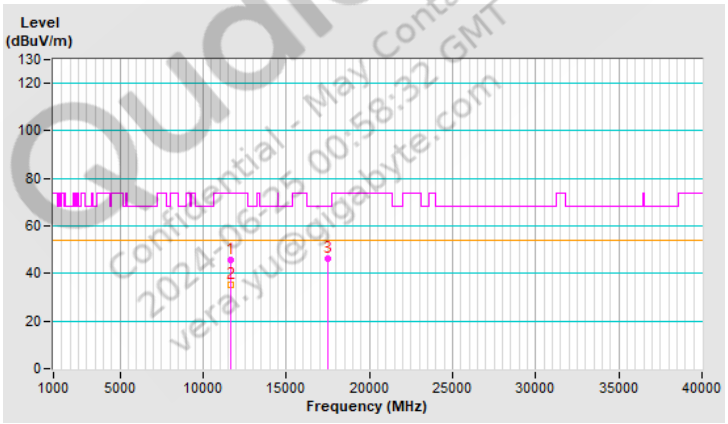


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52-tone RU	Channel	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	45.7 PK	74.0	-28.3	1.10 V	208	33.2	12.5
2	11650.00	35.2 AV	54.0	-18.8	1.10 V	208	22.7	12.5
3	#17475.00	46.2 PK	68.2	-22.0	1.10 V	170	27.5	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

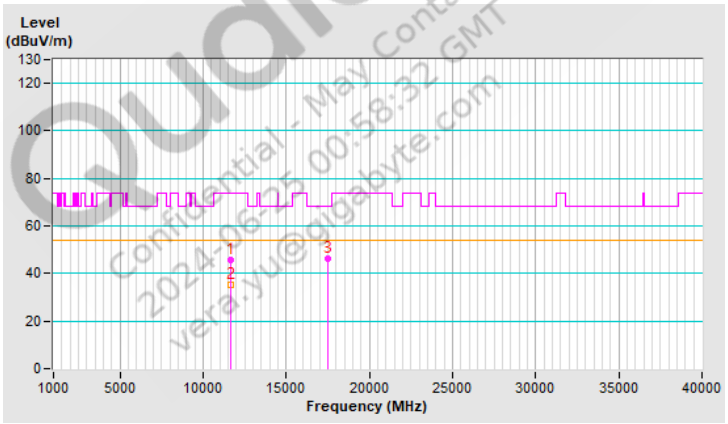


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36：5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	46.5 PK	68.2	-21.7	1.00 H	176	34.9	11.6
2	15540.00	46.5 PK	74.0	-27.5	1.26 H	214	34.7	11.8
3	15540.00	34.9 AV	54.0	-19.1	1.26 H	214	23.1	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

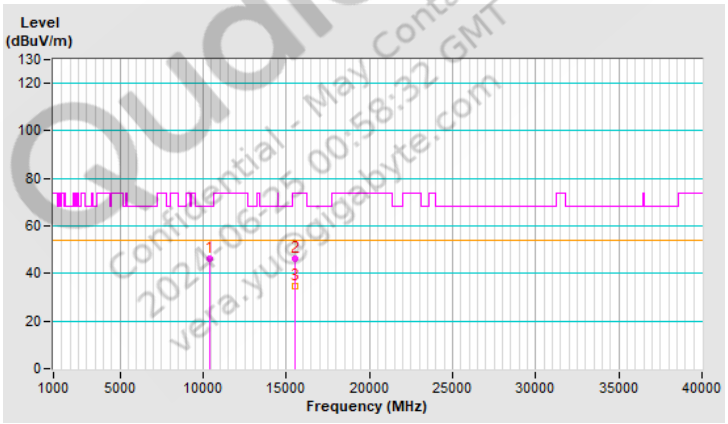


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 36：5180 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10360.00	46.5 PK	68.2	-21.7	1.16 V	187	34.9	11.6
2	15540.00	46.1 PK	74.0	-27.9	1.02 V	172	34.3	11.8
3	15540.00	34.8 AV	54.0	-19.2	1.02 V	172	23.0	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

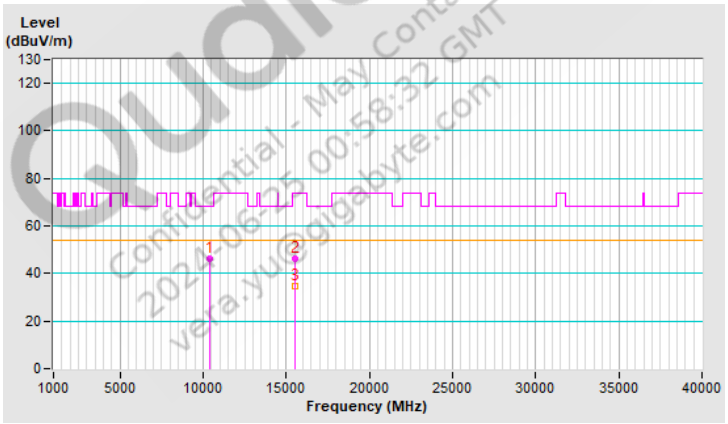


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10400.00	45.7 PK	68.2	-22.5	1.00 H	176	33.9	11.8
2	15600.00	45.7 PK	74.0	-28.3	1.20 H	223	34.0	11.7
3	15600.00	34.5 AV	54.0	-19.5	1.20 H	223	22.8	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

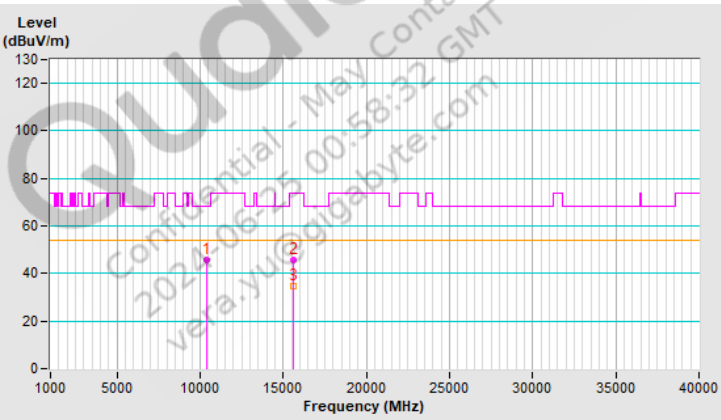


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10400.00	46.0 PK	68.2	-22.2	1.16 V	194	34.2	11.8
2	15600.00	46.4 PK	74.0	-27.6	1.02 V	194	34.7	11.7
3	15600.00	34.9 AV	54.0	-19.1	1.02 V	194	23.2	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

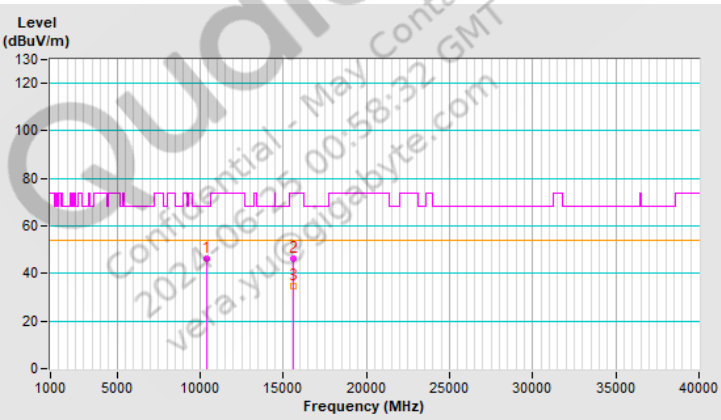


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 48：5240 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10480.00	46.4 PK	68.2	-21.8	1.06 H	190	34.6	11.8
2	15720.00	46.3 PK	74.0	-27.7	1.27 H	247	34.7	11.6
3	15720.00	34.7 AV	54.0	-19.3	1.27 H	247	23.1	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

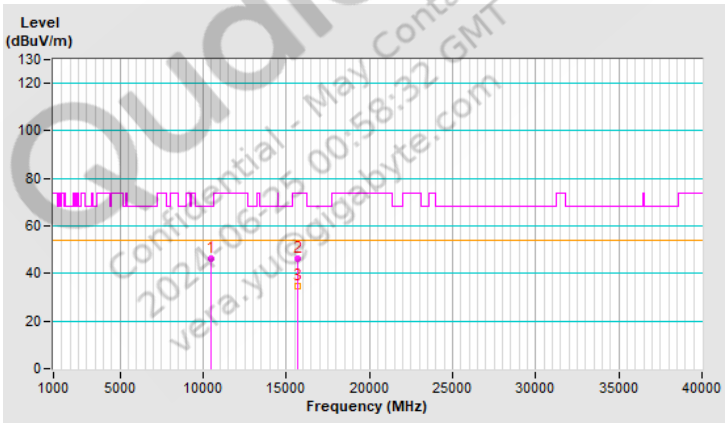


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 48：5240 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10480.00	45.9 PK	68.2	-22.3	1.13 V	177	34.1	11.8
2	15720.00	46.0 PK	74.0	-28.0	1.05 V	181	34.4	11.6
3	15720.00	34.3 AV	54.0	-19.7	1.05 V	181	22.7	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

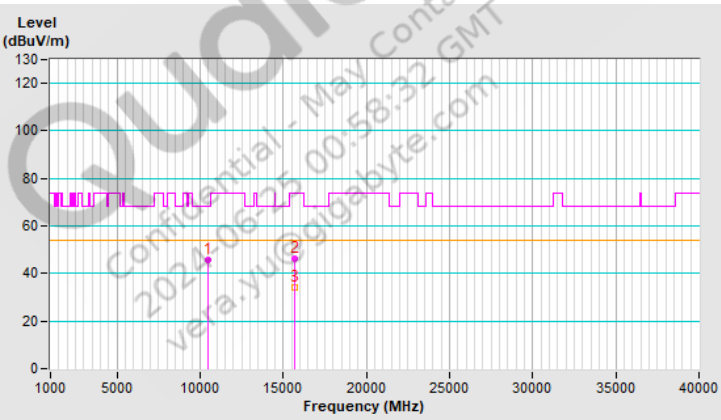


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 52：5260 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10520.00	46.0 PK	68.2	-22.2	1.02 H	199	34.3	11.7
2	15780.00	45.8 PK	74.0	-28.2	1.28 H	220	34.5	11.3
3	15780.00	34.2 AV	54.0	-19.8	1.28 H	220	22.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

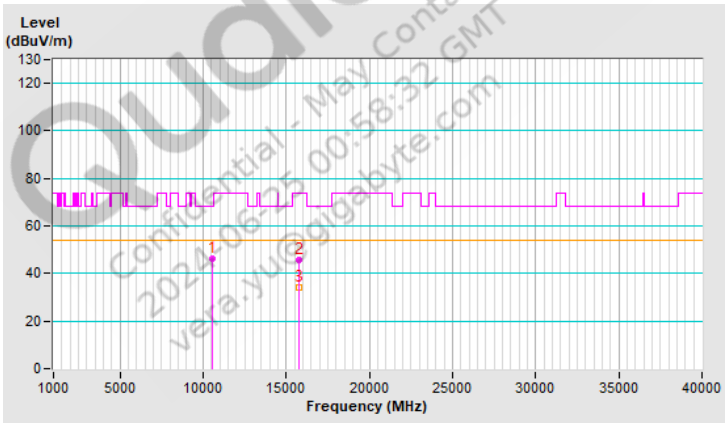


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 52：5260 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10520.00	46.3 PK	68.2	-21.9	1.16 V	185	34.6	11.7
2	15780.00	45.7 PK	74.0	-28.3	1.00 V	166	34.4	11.3
3	15780.00	34.0 AV	54.0	-20.0	1.00 V	166	22.7	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

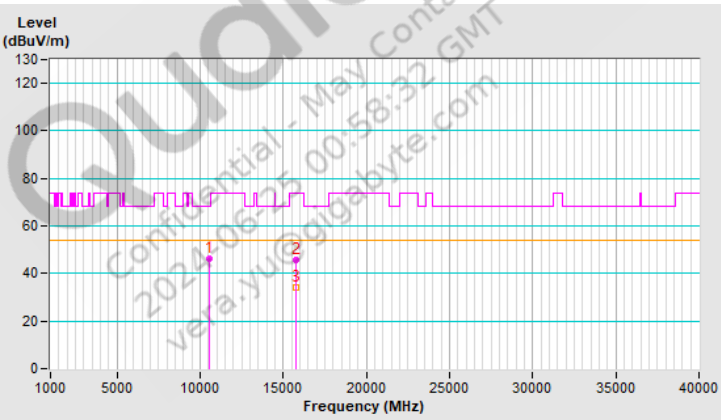


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 60：5300 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10600.00	46.3 PK	74.0	-27.7	1.00 H	182	34.6	11.7
2	10600.00	35.6 AV	54.0	-18.4	1.00 H	182	23.9	11.7
3	15900.00	46.2 PK	74.0	-27.8	1.23 H	235	35.2	11.0
4	15900.00	34.6 AV	54.0	-19.4	1.23 H	235	23.6	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

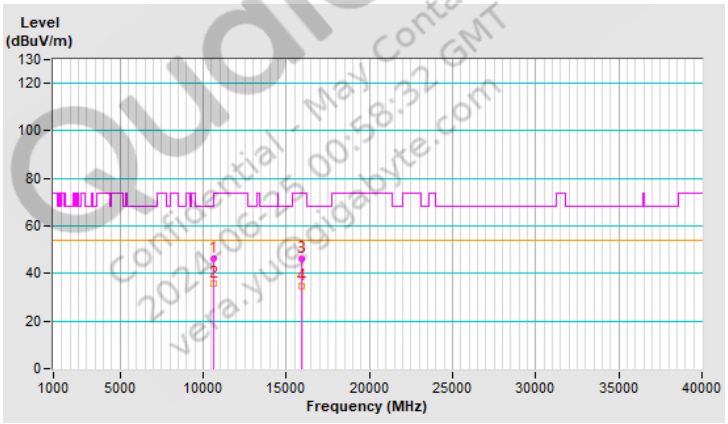


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 60：5300 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10600.00	46.8 PK	74.0	-27.2	1.07 V	203	35.1	11.7
2	10600.00	35.9 AV	54.0	-18.1	1.07 V	203	24.2	11.7
3	15900.00	45.4 PK	74.0	-28.6	1.01 V	175	34.4	11.0
4	15900.00	34.0 AV	54.0	-20.0	1.01 V	175	23.0	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

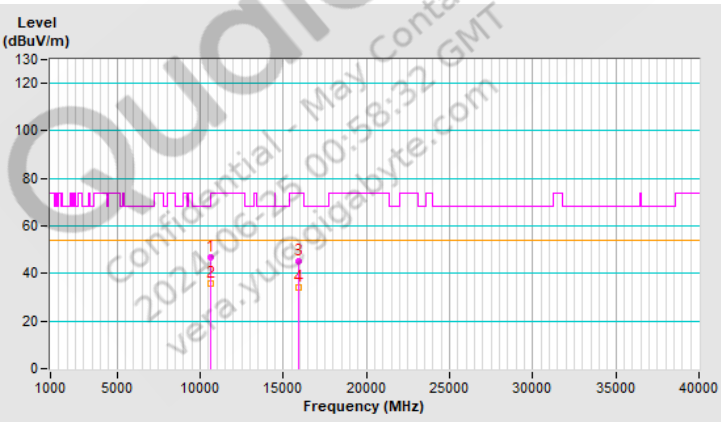


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	45.7 PK	74.0	-28.3	1.02 H	200	34.0	11.7
2	10640.00	35.1 AV	54.0	-18.9	1.02 H	200	23.4	11.7
3	15960.00	46.2 PK	74.0	-27.8	1.32 H	236	34.9	11.3
4	15960.00	34.8 AV	54.0	-19.2	1.32 H	236	23.5	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

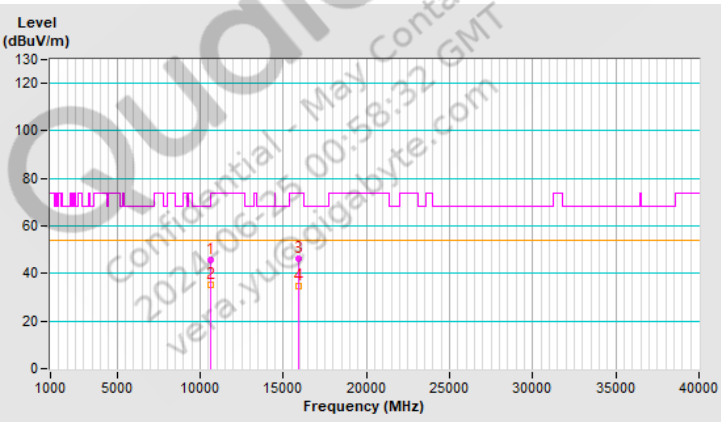


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10640.00	45.7 PK	74.0	-28.3	1.07 V	178	34.0	11.7
2	10640.00	35.1 AV	54.0	-18.9	1.07 V	178	23.4	11.7
3	15960.00	46.7 PK	74.0	-27.3	1.05 V	175	35.4	11.3
4	15960.00	35.0 AV	54.0	-19.0	1.05 V	175	23.7	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

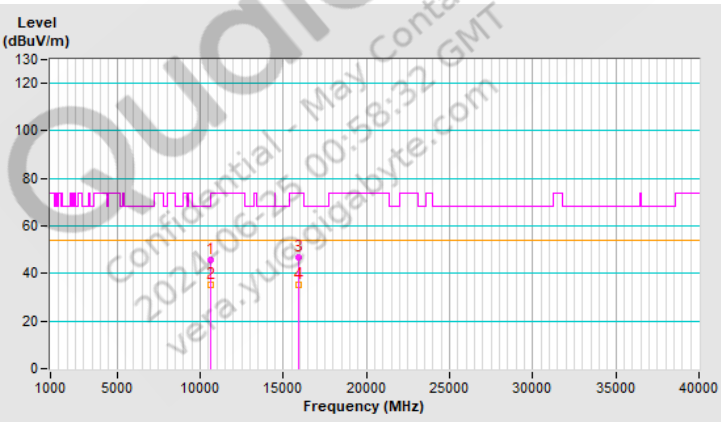


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 100：5500 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11000.00	46.4 PK	74.0	-27.6	1.08 H	200	34.0	12.4
2	11000.00	35.6 AV	54.0	-18.4	1.08 H	200	23.2	12.4
3	#16500.00	46.5 PK	68.2	-21.7	1.23 H	245	32.8	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

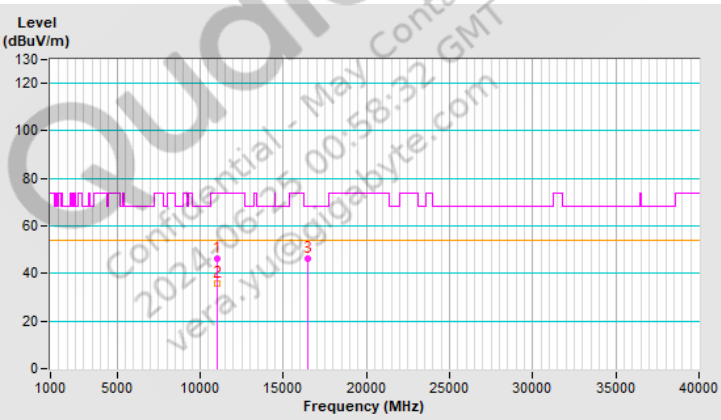


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 100：5500 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11000.00	45.8 PK	74.0	-28.2	1.17 V	193	33.4	12.4
2	11000.00	35.3 AV	54.0	-18.7	1.17 V	193	22.9	12.4
3	#16500.00	45.7 PK	68.2	-22.5	1.03 V	166	32.0	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

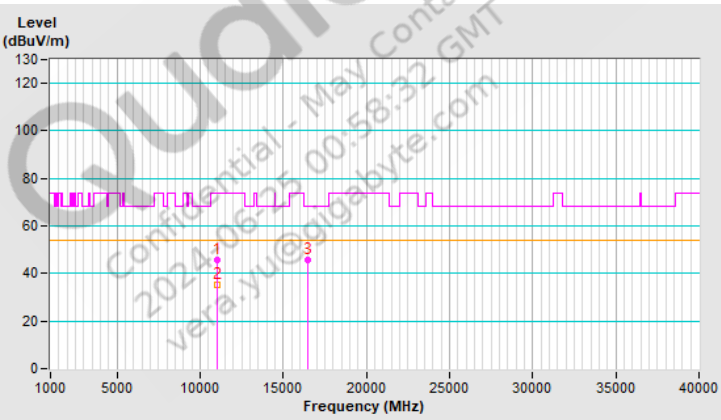


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	46.5 PK	74.0	-27.5	1.00 H	196	34.5	12.0
2	11160.00	35.6 AV	54.0	-18.4	1.00 H	196	23.6	12.0
3	#16740.00	45.7 PK	68.2	-22.5	1.27 H	238	30.5	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

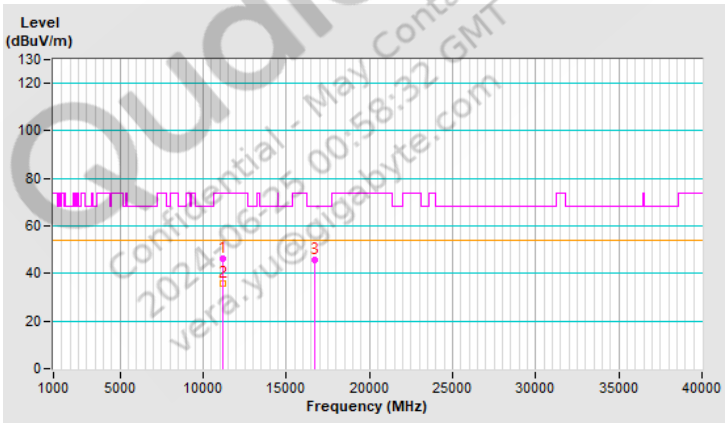


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11160.00	46.4 PK	74.0	-27.6	1.15 V	191	34.4	12.0
2	11160.00	35.6 AV	54.0	-18.4	1.15 V	191	23.6	12.0
3	#16740.00	46.0 PK	68.2	-22.2	1.03 V	189	30.8	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

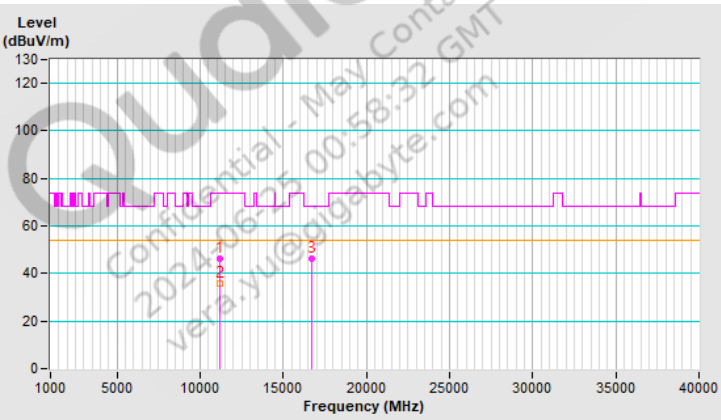


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 140：5700 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11400.00	46.4 PK	74.0	-27.6	1.04 H	193	33.7	12.7
2	11400.00	36.0 AV	54.0	-18.0	1.04 H	193	23.3	12.7
3	#17100.00	46.0 PK	68.2	-22.2	1.29 H	223	29.7	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

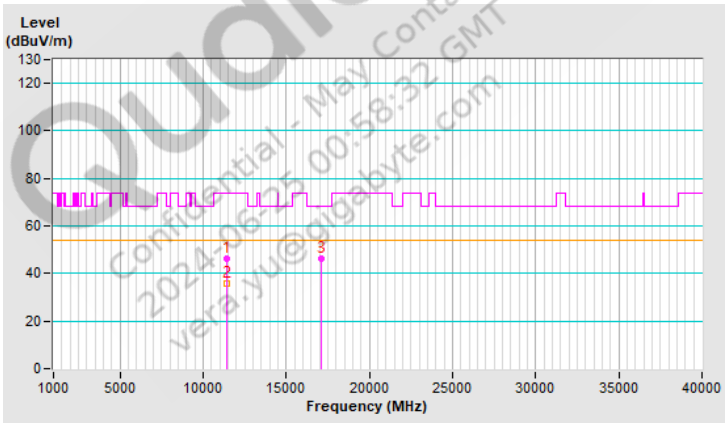


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 140：5700 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11400.00	46.2 PK	74.0	-27.8	1.12 V	177	33.5	12.7
2	11400.00	35.4 AV	54.0	-18.6	1.12 V	177	22.7	12.7
3	#17100.00	45.6 PK	68.2	-22.6	1.08 V	187	29.3	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

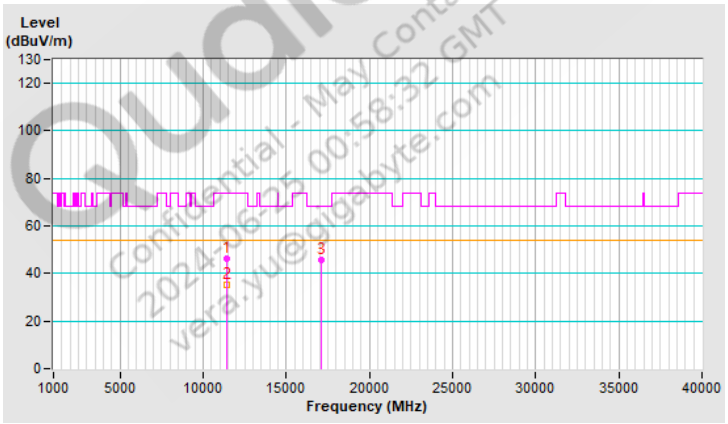


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 144：5720 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11440.00	46.2 PK	74.0	-27.8	1.05 H	200	33.5	12.7
2	11440.00	35.6 AV	54.0	-18.4	1.05 H	200	22.9	12.7
3	#17160.00	46.3 PK	68.2	-21.9	1.24 H	242	30.0	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

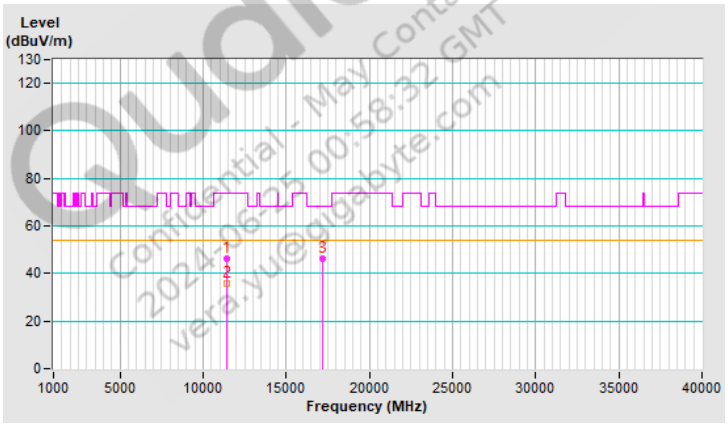


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 144：5720 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11440.00	45.9 PK	74.0	-28.1	1.07 V	202	33.2	12.7
2	11440.00	35.2 AV	54.0	-18.8	1.07 V	202	22.5	12.7
3	#17160.00	45.4 PK	68.2	-22.8	1.02 V	185	29.1	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

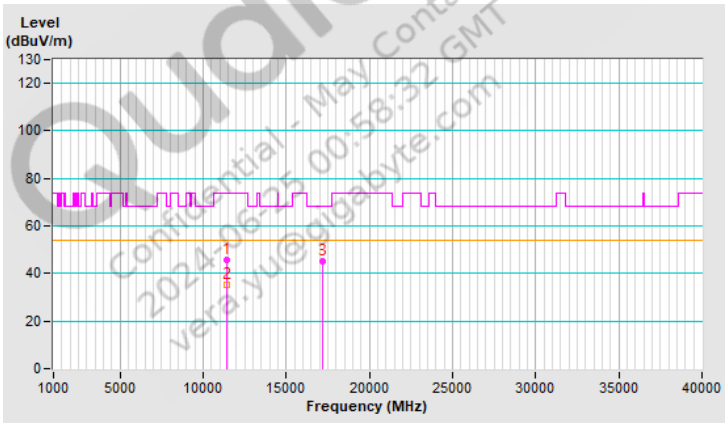


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149：5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	46.4 PK	74.0	-27.6	1.03 H	186	33.6	12.8
2	11490.00	35.7 AV	54.0	-18.3	1.03 H	186	22.9	12.8
3	#17235.00	46.2 PK	68.2	-22.0	1.29 H	235	29.7	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

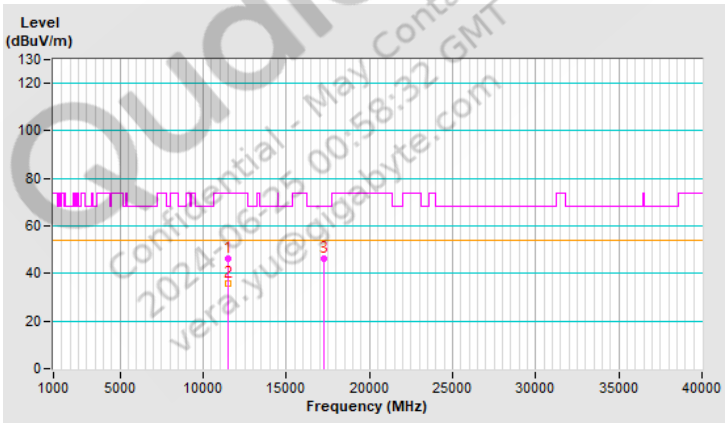


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 149：5745 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11490.00	46.0 PK	74.0	-28.0	1.11 V	199	33.2	12.8
2	11490.00	35.1 AV	54.0	-18.9	1.11 V	199	22.3	12.8
3	#17235.00	45.9 PK	68.2	-22.3	1.00 V	189	29.4	16.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

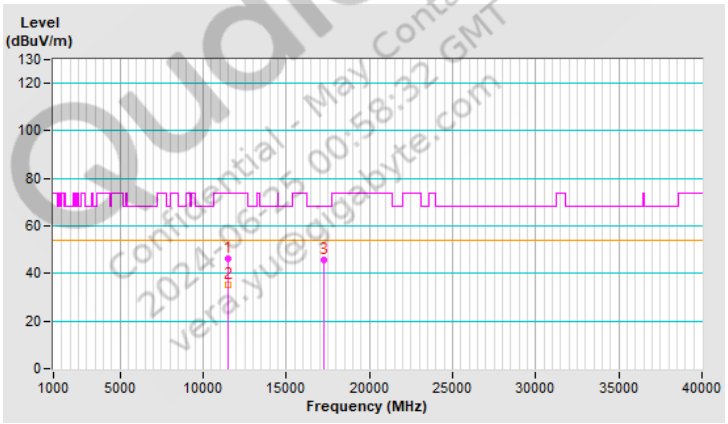


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 157：5785 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11570.00	45.8 PK	74.0	-28.2	1.00 H	189	33.1	12.7
2	11570.00	35.2 AV	54.0	-18.8	1.00 H	189	22.5	12.7
3	#17355.00	45.8 PK	68.2	-22.4	1.22 H	227	28.4	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

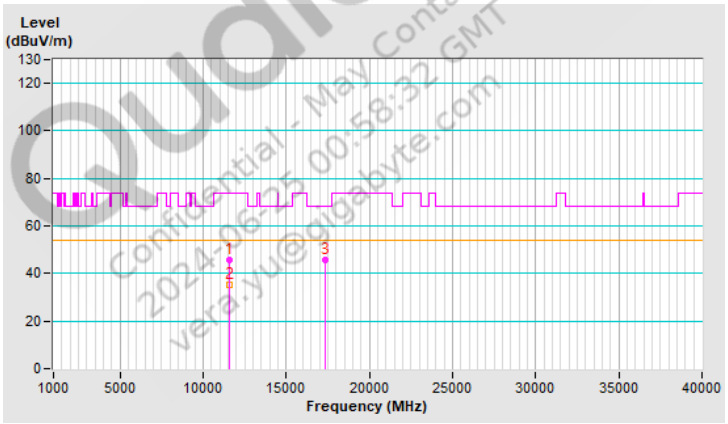


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	**Channel**	CH 157：5785 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11570.00	46.4 PK	74.0	-27.6	1.11 V	182	33.7	12.7
2	11570.00	35.8 AV	54.0	-18.2	1.11 V	182	23.1	12.7
3	#17355.00	46.2 PK	68.2	-22.0	1.02 V	166	28.8	17.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

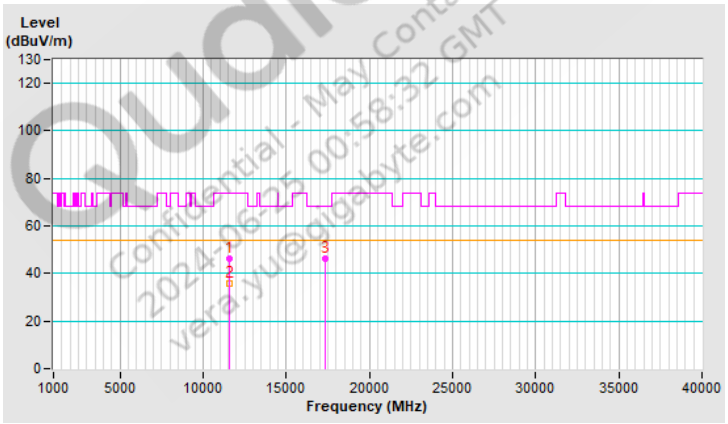


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	46.9 PK	74.0	-27.1	1.00 H	183	34.4	12.5
2	11650.00	36.0 AV	54.0	-18.0	1.00 H	183	23.5	12.5
3	#17475.00	46.4 PK	68.2	-21.8	1.28 H	229	27.7	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

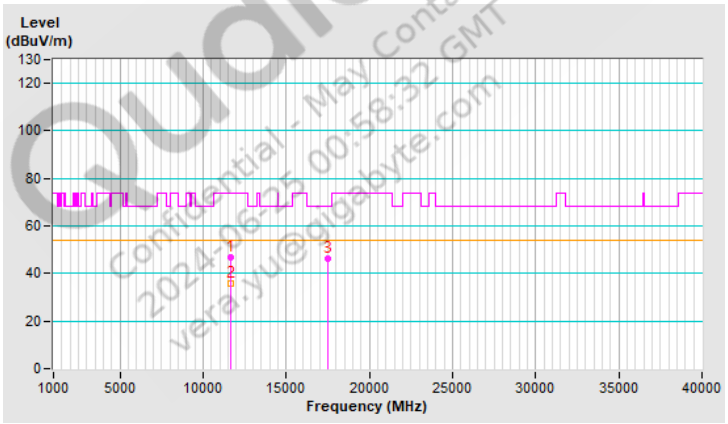


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106-tone RU	Channel	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	46.4 PK	74.0	-27.6	1.16 V	196	33.9	12.5
2	11650.00	35.9 AV	54.0	-18.1	1.16 V	196	23.4	12.5
3	#17475.00	46.0 PK	68.2	-22.2	1.02 V	175	27.3	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

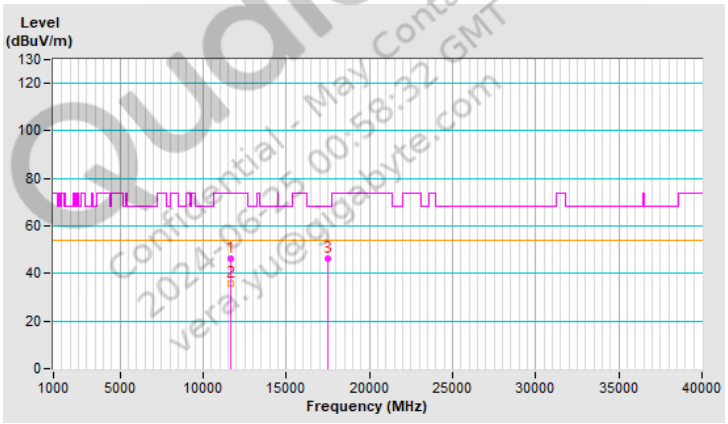


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 242-tone RU	Channel	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	45.9 PK	68.2	-22.3	1.05 H	182	34.1	11.8
2	15600.00	46.2 PK	74.0	-27.8	1.27 H	228	34.5	11.7
3	15600.00	34.9 AV	54.0	-19.1	1.27 H	228	23.2	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

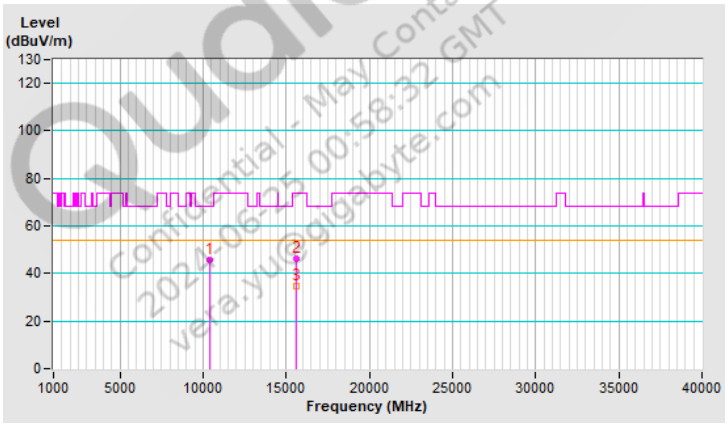


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 242-tone RU	Channel	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	45.7 PK	68.2	-22.5	1.15 V	200	33.9	11.8
2	15600.00	45.4 PK	74.0	-28.6	1.04 V	188	33.7	11.7
3	15600.00	34.2 AV	54.0	-19.8	1.04 V	188	22.5	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

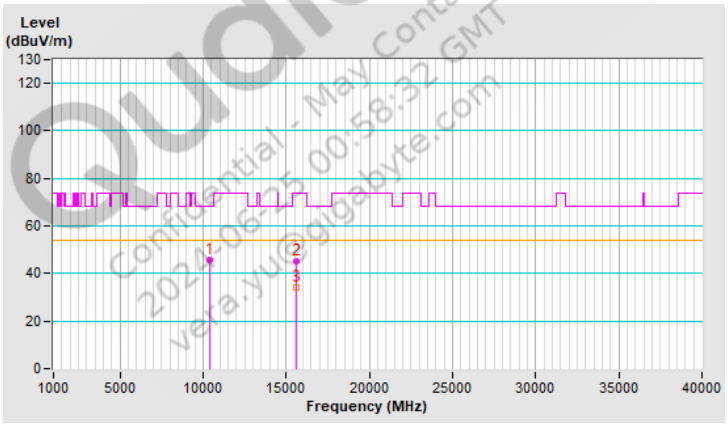


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 242-tone RU	**Channel**	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10640.00	46.4 PK	74.0	-27.6	1.05 H	189	34.7	11.7
2	10640.00	36.0 AV	54.0	-18.0	1.05 H	189	24.3	11.7
3	15960.00	45.4 PK	74.0	-28.6	1.25 H	223	34.1	11.3
4	15960.00	34.1 AV	54.0	-19.9	1.25 H	223	22.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

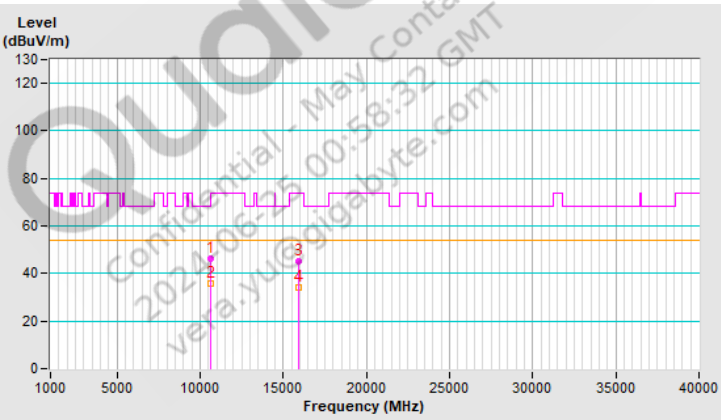


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 242-tone RU	Channel	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	10640.00	46.3 PK	74.0	-27.7	1.12 V	200	34.6	11.7
2	10640.00	35.9 AV	54.0	-18.1	1.12 V	200	24.2	11.7
3	15960.00	45.6 PK	74.0	-28.4	1.00 V	183	34.3	11.3
4	15960.00	34.4 AV	54.0	-19.6	1.00 V	183	23.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

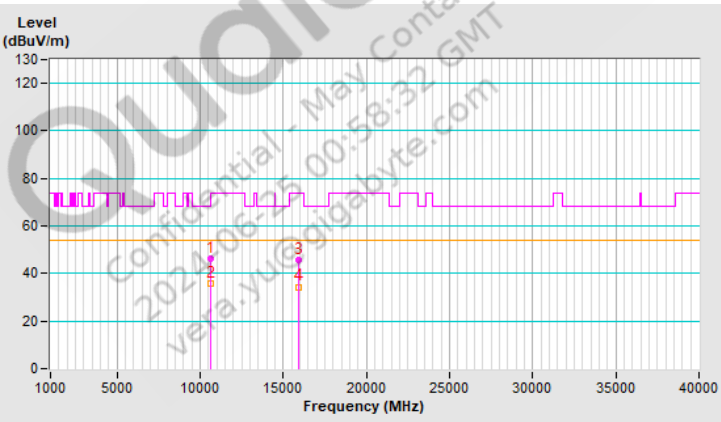


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 242-tone RU	**Channel**	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11160.00	46.0 PK	74.0	-28.0	1.00 H	180	34.0	12.0
2	11160.00	35.2 AV	54.0	-18.8	1.00 H	180	23.2	12.0
3	#16740.00	45.8 PK	68.2	-22.4	1.26 H	247	30.6	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

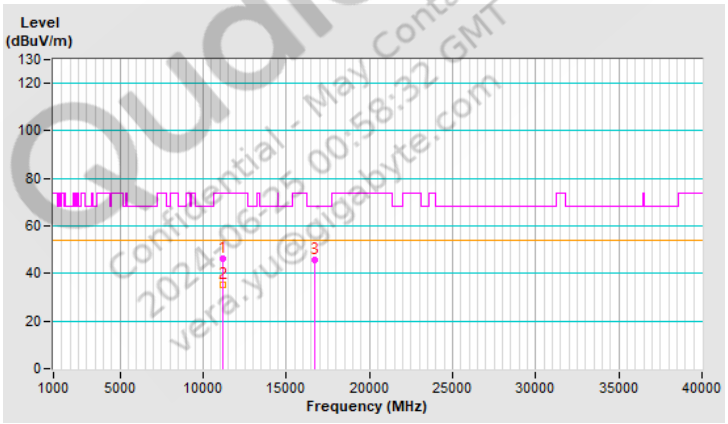


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 242-tone RU	**Channel**	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11160.00	46.5 PK	74.0	-27.5	1.09 V	181	34.5	12.0
2	11160.00	36.0 AV	54.0	-18.0	1.09 V	181	24.0	12.0
3	#16740.00	46.1 PK	68.2	-22.1	1.05 V	180	30.9	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

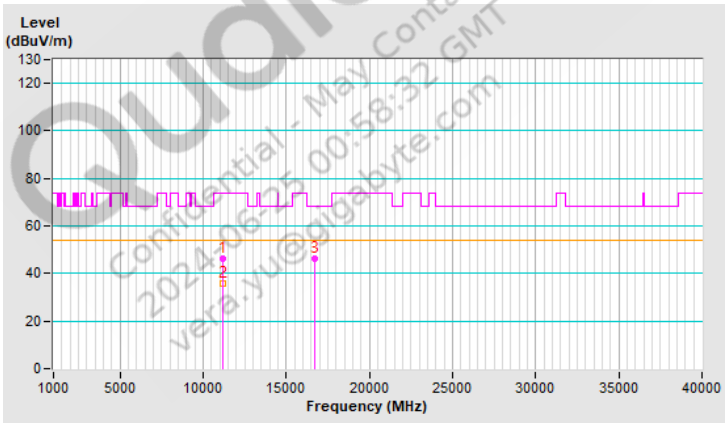


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 242-tone RU	**Channel**	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11650.00	46.6 PK	74.0	-27.4	1.05 H	177	34.1	12.5
2	11650.00	35.8 AV	54.0	-18.2	1.05 H	177	23.3	12.5
3	#17475.00	45.7 PK	68.2	-22.5	1.25 H	219	27.0	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

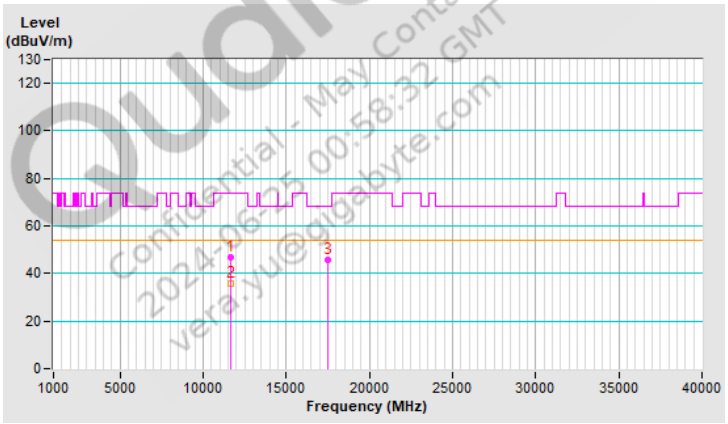


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 242-tone RU	Channel	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	46.5 PK	74.0	-27.5	1.15 V	184	34.0	12.5
2	11650.00	35.6 AV	54.0	-18.4	1.15 V	184	23.1	12.5
3	#17475.00	46.3 PK	68.2	-21.9	1.03 V	194	27.6	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

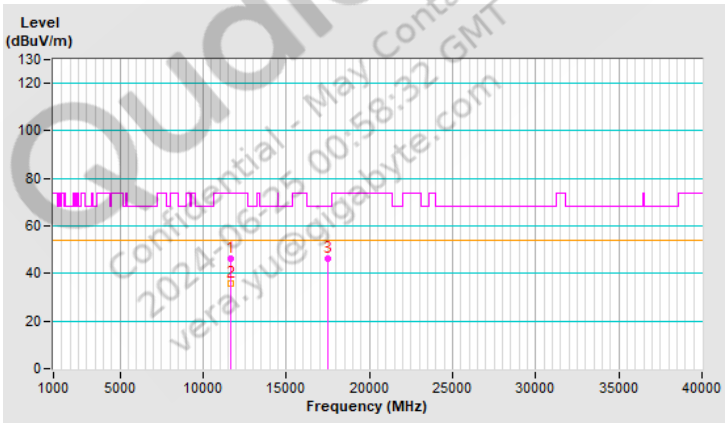


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40) 484-tone RU	Channel	CH 46：5230 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10460.00	45.5 PK	68.2	-22.7	1.07 H	182	33.7	11.8
2	15690.00	45.8 PK	74.0	-28.2	1.28 H	232	34.1	11.7
3	15690.00	34.6 AV	54.0	-19.4	1.28 H	232	22.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

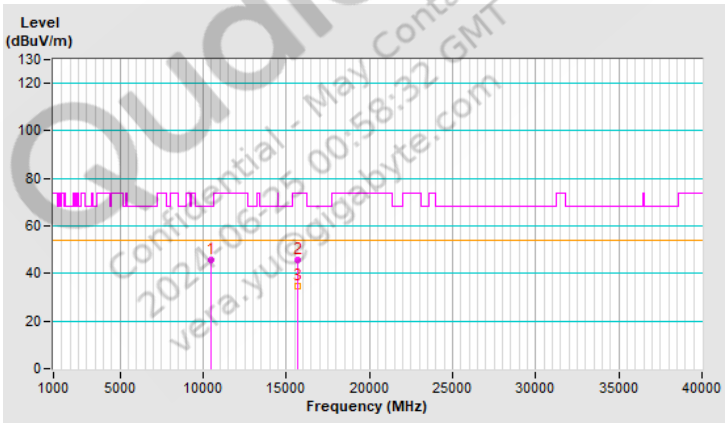


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40) 484-tone RU	**Channel**	CH 46：5230 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10460.00	46.0 PK	68.2	-22.2	1.17 V	198	34.2	11.8
2	15690.00	46.2 PK	74.0	-27.8	1.03 V	195	34.5	11.7
3	15690.00	34.5 AV	54.0	-19.5	1.03 V	195	22.8	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

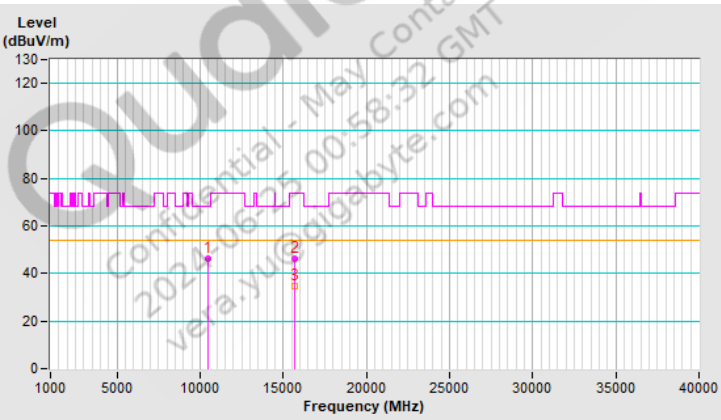


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40) 484-tone RU	**Channel**	CH 62：5310 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10620.00	46.4 PK	74.0	-27.6	1.00 H	173	34.7	11.7
2	10620.00	35.5 AV	54.0	-18.5	1.00 H	173	23.8	11.7
3	15930.00	45.8 PK	74.0	-28.2	1.31 H	232	34.7	11.1
4	15930.00	34.1 AV	54.0	-19.9	1.31 H	232	23.0	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

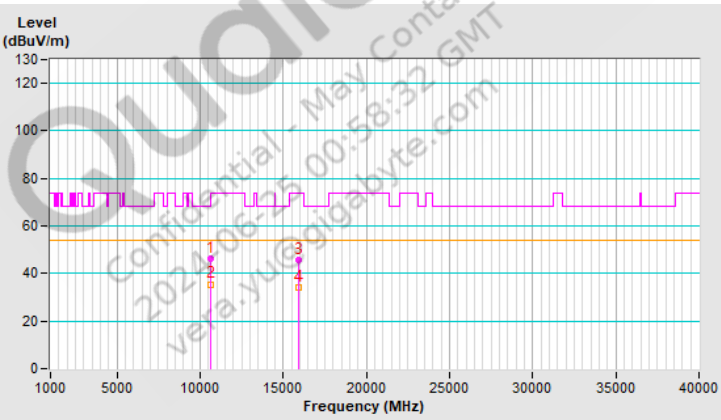


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT40) 484-tone RU	**Channel**	CH 62：5310 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10620.00	46.6 PK	74.0	-27.4	1.13 V	200	34.9	11.7
2	10620.00	35.8 AV	54.0	-18.2	1.13 V	200	24.1	11.7
3	15930.00	45.5 PK	74.0	-28.5	1.00 V	170	34.4	11.1
4	15930.00	34.2 AV	54.0	-19.8	1.00 V	170	23.1	11.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

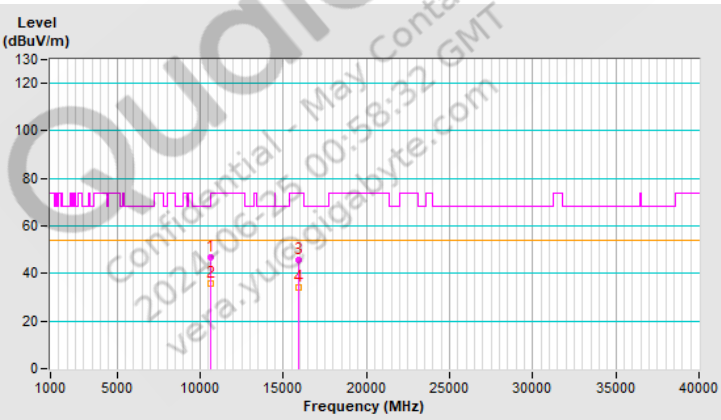


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT40) 484-tone RU	**Channel**	CH 110：5550 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11100.00	50.3 PK	74.0	-23.7	1.17 H	179	38.1	12.2
2	11100.00	41.5 AV	54.0	-12.5	1.17 H	179	29.3	12.2
3	#16650.00	45.5 PK	68.2	-22.7	1.35 H	226	30.7	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

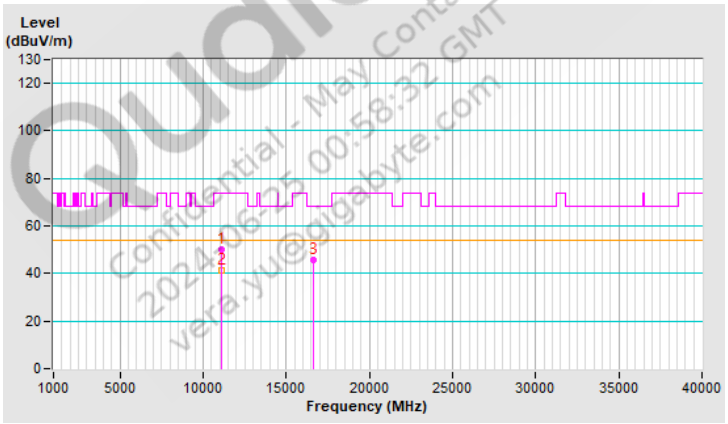


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40) 484-tone RU	**Channel**	CH 110：5550 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11100.00	42.6 PK	74.0	-31.4	1.08 V	181	30.4	12.2
2	11100.00	38.2 AV	54.0	-15.8	1.08 V	181	26.0	12.2
3	#16650.00	46.9 PK	68.2	-21.3	1.00 V	189	32.1	14.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

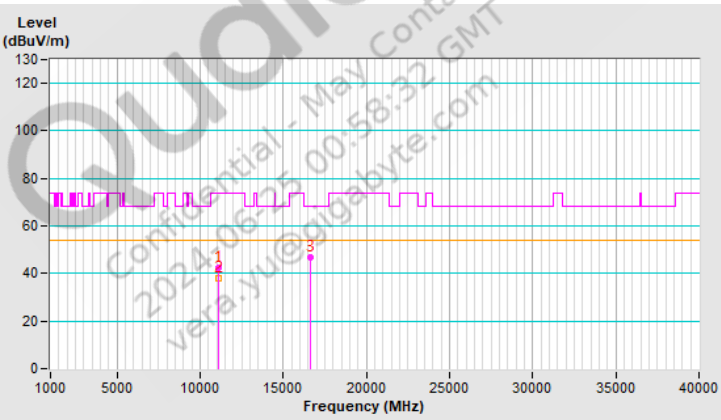


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40) 484-tone RU	Channel	CH 159：5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11590.00	48.7 PK	74.0	-25.3	1.00 H	176	36.0	12.7
2	11590.00	40.5 AV	54.0	-13.5	1.00 H	176	27.8	12.7
3	#17385.00	44.4 PK	68.2	-23.8	1.28 H	216	26.8	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

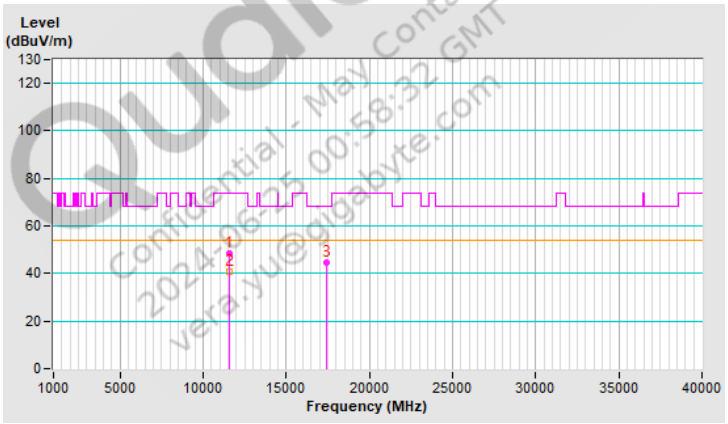


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT40) 484-tone RU	Channel	CH 159：5795 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11590.00	42.3 PK	74.0	-31.7	1.12 V	202	29.6	12.7
2	11590.00	38.3 AV	54.0	-15.7	1.12 V	202	25.6	12.7
3	#17385.00	46.9 PK	68.2	-21.3	1.04 V	171	29.3	17.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

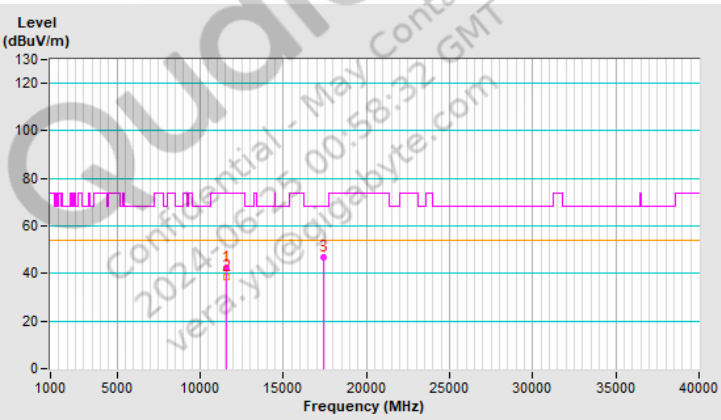


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80) 996-tone RU	Channel	CH 42：5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	46.2 PK	68.2	-22.0	1.05 H	196	34.3	11.9
2	15630.00	46.3 PK	74.0	-27.7	1.32 H	232	34.6	11.7
3	15630.00	34.6 AV	54.0	-19.4	1.32 H	232	22.9	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

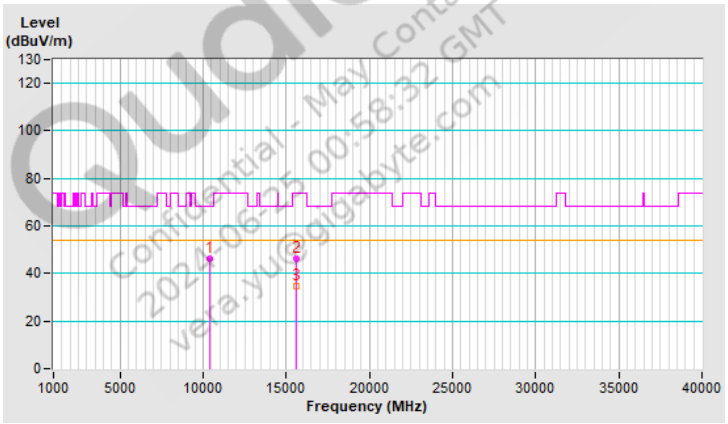


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80) 996-tone RU	Channel	CH 42：5210 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10420.00	46.6 PK	68.2	-21.6	1.08 V	188	34.7	11.9
2	15630.00	46.1 PK	74.0	-27.9	1.05 V	168	34.4	11.7
3	15630.00	34.9 AV	54.0	-19.1	1.05 V	168	23.2	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

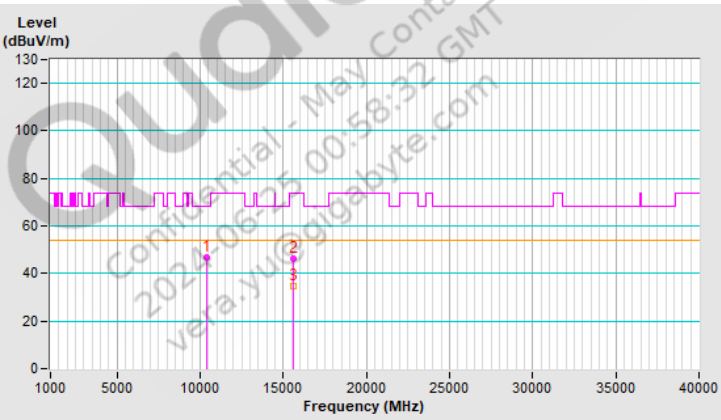


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80) 996-tone RU	Channel	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	46.3 PK	68.2	-21.9	1.00 H	190	34.6	11.7
2	15870.00	46.0 PK	74.0	-28.0	1.29 H	240	35.0	11.0
3	15870.00	34.3 AV	54.0	-19.7	1.29 H	240	23.3	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

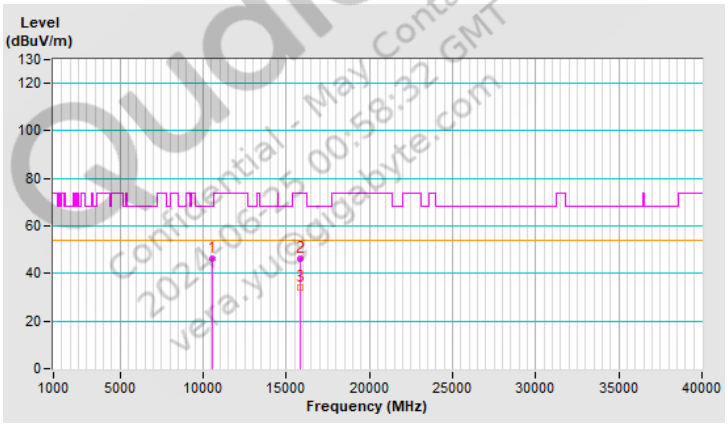


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80) 996-tone RU	Channel	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10580.00	46.4 PK	68.2	-21.8	1.13 V	201	34.7	11.7
2	15870.00	45.7 PK	74.0	-28.3	1.01 V	194	34.7	11.0
3	15870.00	34.3 AV	54.0	-19.7	1.01 V	194	23.3	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

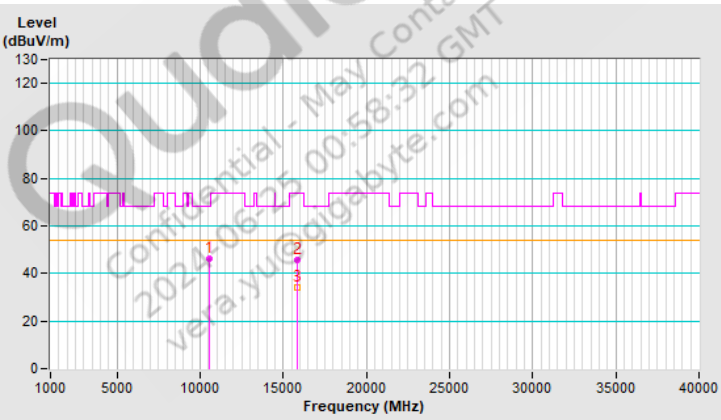


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80) 996-tone RU	Channel	CH 138：5690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11380.00	46.0 PK	74.0	-28.0	1.05 H	198	33.3	12.7
2	11380.00	35.6 AV	54.0	-18.4	1.05 H	198	22.9	12.7
3	#17070.00	45.9 PK	68.2	-22.3	1.30 H	218	29.6	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

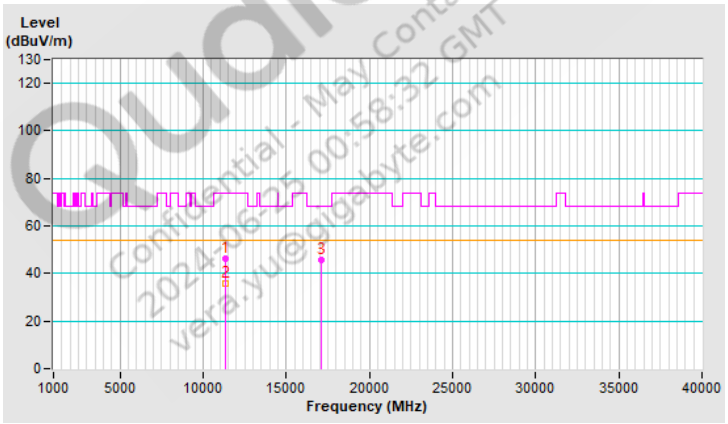


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80) 996-tone RU	**Channel**	CH 138：5690 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11380.00	46.4 PK	74.0	-27.6	1.16 V	187	33.7	12.7
2	11380.00	35.8 AV	54.0	-18.2	1.16 V	187	23.1	12.7
3	#17070.00	45.9 PK	68.2	-22.3	1.07 V	192	29.6	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

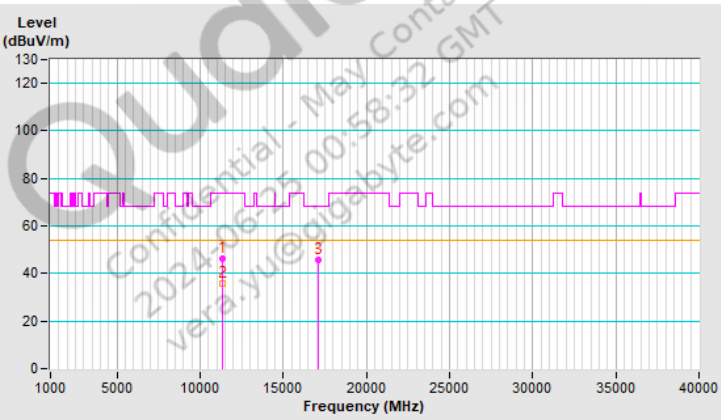


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80) 996-tone RU	Channel	CH 155：5775 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11550.00	46.8 PK	74.0	-27.2	1.02 H	192	34.1	12.7
2	11550.00	35.9 AV	54.0	-18.1	1.02 H	192	23.2	12.7
3	#17325.00	46.1 PK	68.2	-22.1	1.28 H	247	29.1	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

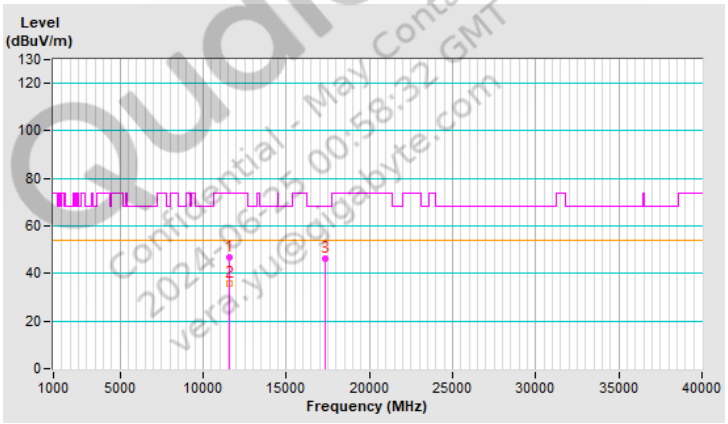


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80) 996-tone RU	**Channel**	CH 155：5775 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11550.00	46.4 PK	74.0	-27.6	1.05 V	205	33.7	12.7
2	11550.00	35.5 AV	54.0	-18.5	1.05 V	205	22.8	12.7
3	#17325.00	46.0 PK	68.2	-22.2	1.06 V	183	29.0	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

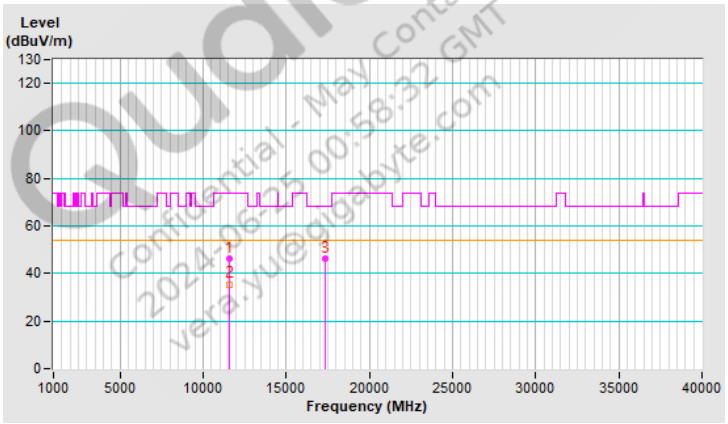


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
verajyu@gigabyte.com

RF Mode	802.11be (EHT160) 2x996-tone RU	**Channel**	CH 50：5250 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10500.00	45.9 PK	68.2	-22.3	1.06 H	188	34.1	11.8
2	15750.00	46.1 PK	74.0	-27.9	1.28 H	221	34.7	11.4
3	15750.00	34.8 AV	54.0	-19.2	1.28 H	221	23.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

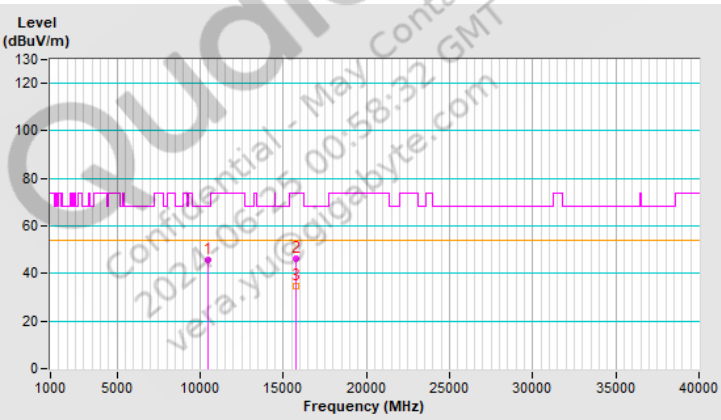


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT160) 2x996-tone RU	Channel	CH 50：5250 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10500.00	46.3 PK	68.2	-21.9	1.10 V	203	34.5	11.8
2	15750.00	46.5 PK	74.0	-27.5	1.04 V	178	35.1	11.4
3	15750.00	34.8 AV	54.0	-19.2	1.04 V	178	23.4	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

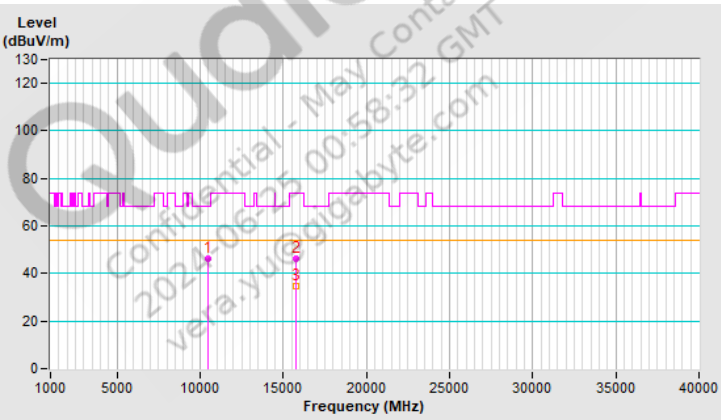


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT160) 2x996-tone RU	**Channel**	CH 114：5570 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11140.00	46.1 PK	74.0	-27.9	1.07 H	194	34.0	12.1
2	11140.00	35.7 AV	54.0	-18.3	1.07 H	194	23.6	12.1
3	#16710.00	45.5 PK	68.2	-22.7	1.22 H	247	30.6	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

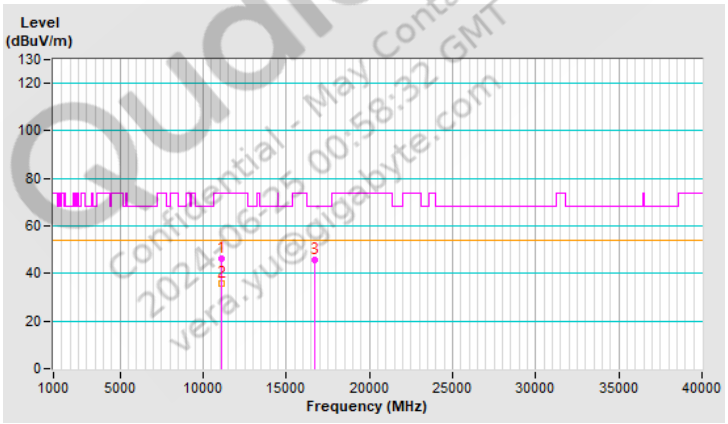


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT160) 2x996-tone RU	**Channel**	CH 114：5570 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11140.00	46.2 PK	74.0	-27.8	1.07 V	192	34.1	12.1
2	11140.00	35.5 AV	54.0	-18.5	1.07 V	192	23.4	12.1
3	#16710.00	46.7 PK	68.2	-21.5	1.03 V	177	31.8	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

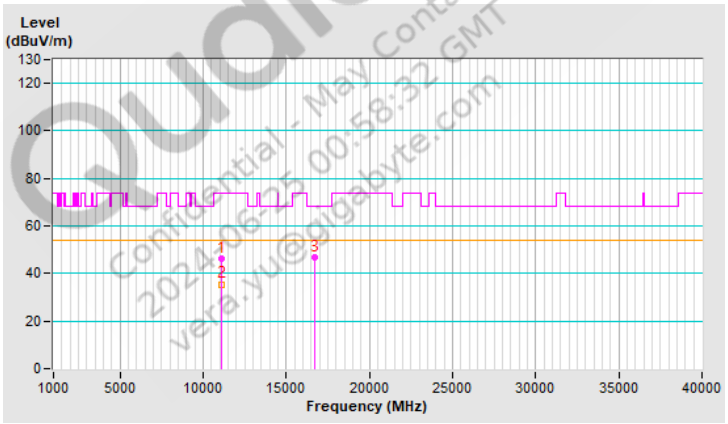


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	45.7 PK	68.2	-22.5	1.09 H	209	33.9	11.8
2	15600.00	45.9 PK	74.0	-28.1	1.33 H	202	34.2	11.7
3	15600.00	34.5 AV	54.0	-19.5	1.33 H	202	22.8	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

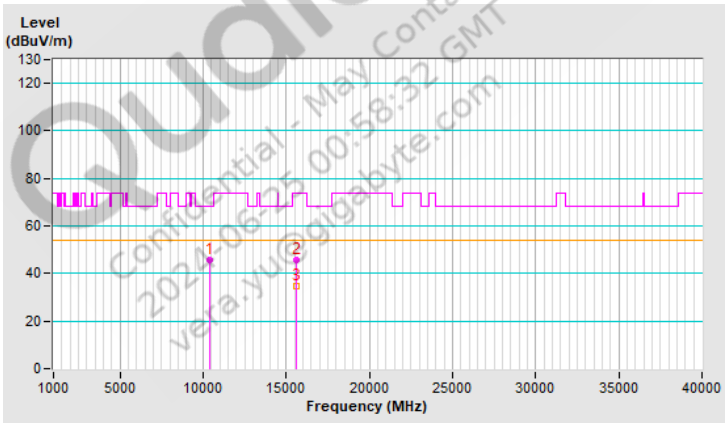


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#10400.00	45.7 PK	68.2	-22.5	1.14 V	207	33.9	11.8
2	15600.00	46.6 PK	74.0	-27.4	1.03 V	191	34.9	11.7
3	15600.00	34.9 AV	54.0	-19.1	1.03 V	191	23.2	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

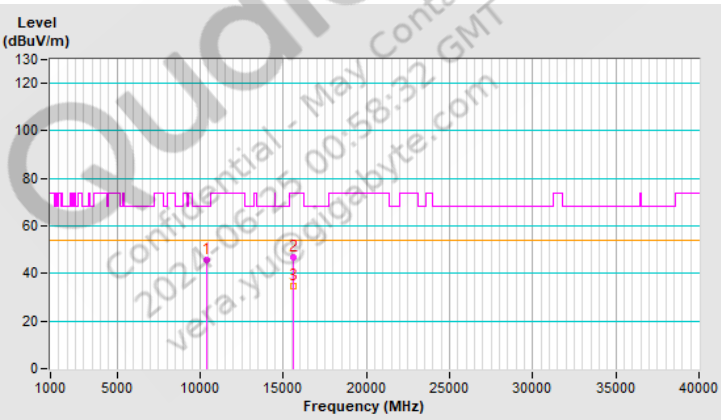


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52+26-tone MRU	**Channel**	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10640.00	45.6 PK	74.0	-28.4	1.04 H	188	33.9	11.7
2	10640.00	35.5 AV	54.0	-18.5	1.04 H	188	23.8	11.7
3	15960.00	45.3 PK	74.0	-28.7	1.33 H	217	34.0	11.3
4	15960.00	34.1 AV	54.0	-19.9	1.33 H	217	22.8	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

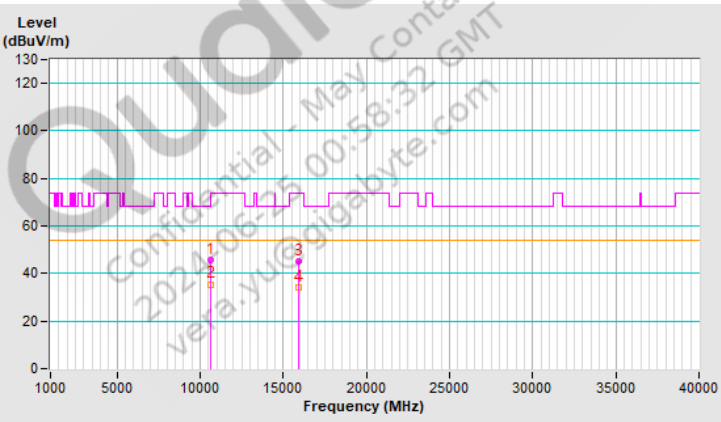


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52+26-tone MRU	**Channel**	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10640.00	46.4 PK	74.0	-27.6	1.04 V	205	34.7	11.7
2	10640.00	35.6 AV	54.0	-18.4	1.04 V	205	23.9	11.7
3	15960.00	46.8 PK	74.0	-27.2	1.04 V	172	35.5	11.3
4	15960.00	35.0 AV	54.0	-19.0	1.04 V	172	23.7	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

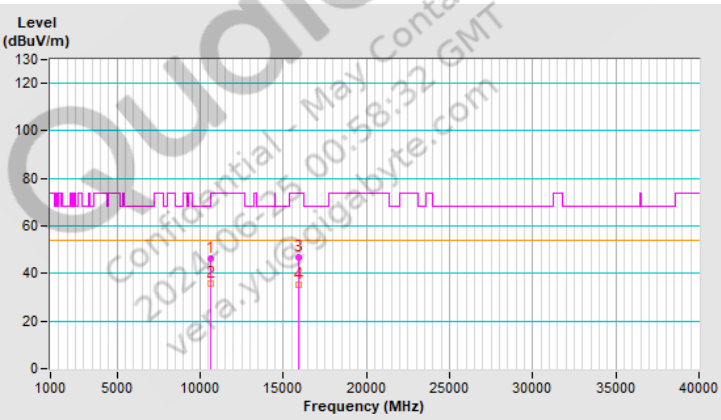


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52+26-tone MRU	**Channel**	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11160.00	45.9 PK	74.0	-28.1	1.06 H	192	33.9	12.0
2	11160.00	35.7 AV	54.0	-18.3	1.06 H	192	23.7	12.0
3	#16740.00	46.4 PK	68.2	-21.8	1.31 H	211	31.2	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

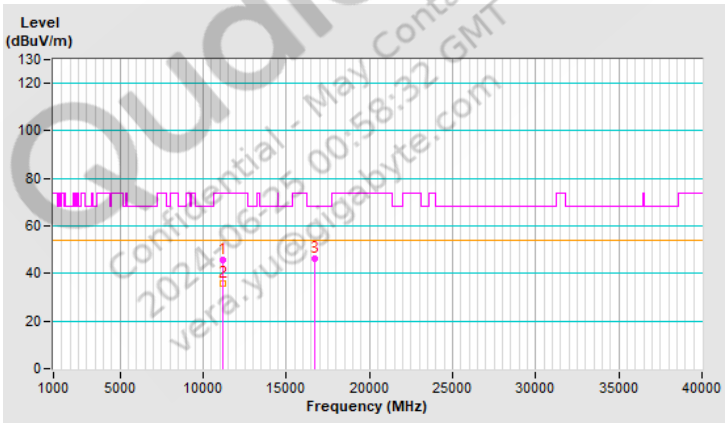


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11160.00	46.7 PK	74.0	-27.3	1.08 V	203	34.7	12.0
2	11160.00	35.9 AV	54.0	-18.1	1.08 V	203	23.9	12.0
3	#16740.00	46.5 PK	68.2	-21.7	1.07 V	189	31.3	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

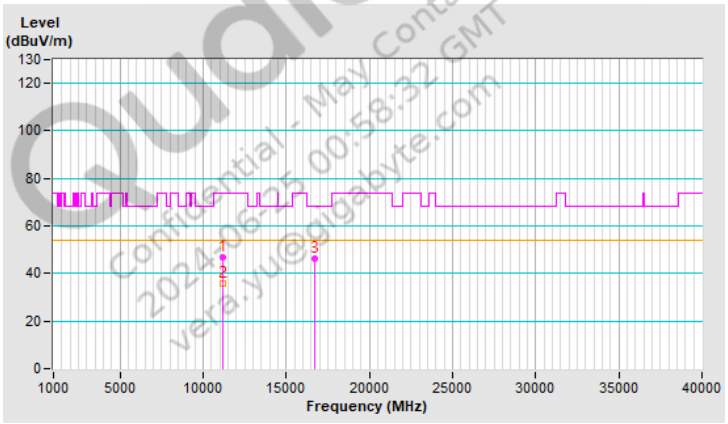


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52+26-tone MRU	**Channel**	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11650.00	45.8 PK	74.0	-28.2	1.06 H	195	33.3	12.5
2	11650.00	35.6 AV	54.0	-18.4	1.06 H	195	23.1	12.5
3	#17475.00	45.6 PK	68.2	-22.6	1.25 H	230	26.9	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

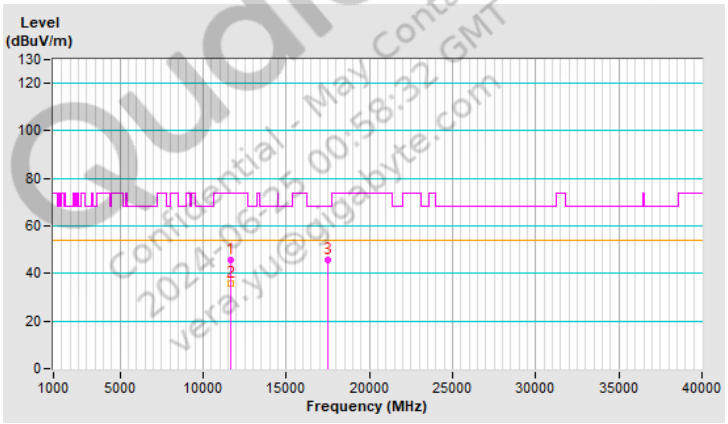


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 52+26-tone MRU	Channel	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	Environmental Conditions	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	11650.00	46.2 PK	74.0	-27.8	1.11 V	189	33.7	12.5
2	11650.00	35.7 AV	54.0	-18.3	1.11 V	189	23.2	12.5
3	#17475.00	46.3 PK	68.2	-21.9	1.12 V	184	27.6	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

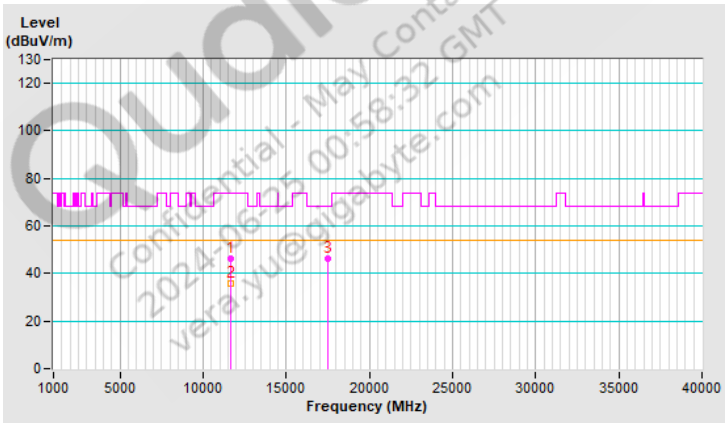


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106+26-tone MRU	**Channel**	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10400.00	45.9 PK	68.2	-22.3	1.00 H	200	34.1	11.8
2	15600.00	45.9 PK	74.0	-28.1	1.36 H	227	34.2	11.7
3	15600.00	34.4 AV	54.0	-19.6	1.36 H	227	22.7	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

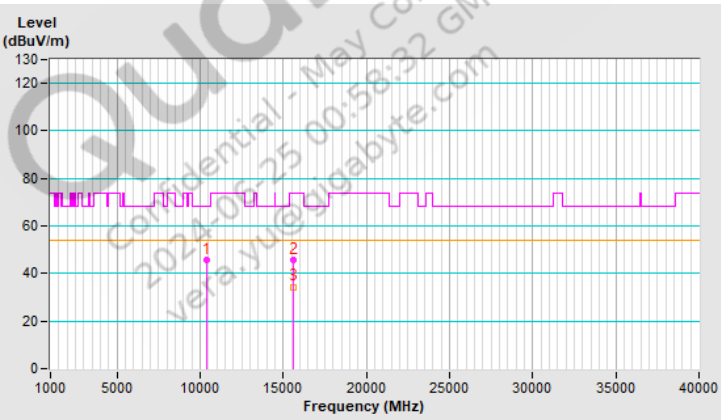


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 106+26-tone MRU	**Channel**	CH 40：5200 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10400.00	46.6 PK	68.2	-21.6	1.15 V	185	34.8	11.8
2	15600.00	46.7 PK	74.0	-27.3	1.08 V	201	35.0	11.7
3	15600.00	34.8 AV	54.0	-19.2	1.08 V	201	23.1	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

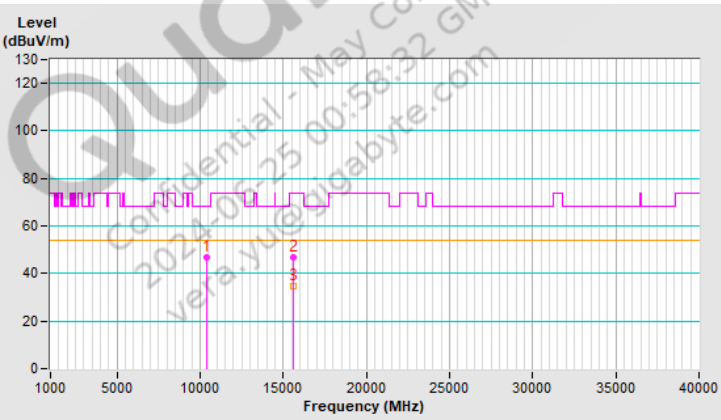


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 106+26-tone MRU	**Channel**	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10640.00	46.1 PK	74.0	-27.9	1.07 H	183	34.4	11.7
2	10640.00	36.0 AV	54.0	-18.0	1.07 H	183	24.3	11.7
3	15960.00	45.6 PK	74.0	-28.4	1.36 H	205	34.3	11.3
4	15960.00	34.3 AV	54.0	-19.7	1.36 H	205	23.0	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

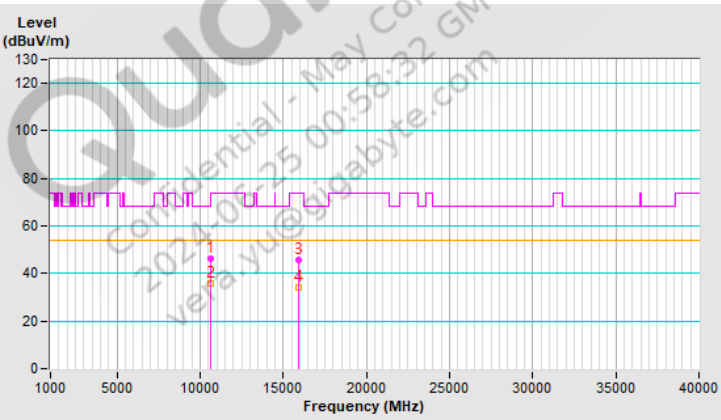


Qualcomm Confidential - May Contain Trade Secrets
2021-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 106+26-tone MRU	**Channel**	CH 64：5320 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	10640.00	46.0 PK	74.0	-28.0	1.09 V	209	34.3	11.7
2	10640.00	35.5 AV	54.0	-18.5	1.09 V	209	23.8	11.7
3	15960.00	46.0 PK	74.0	-28.0	1.05 V	190	34.7	11.3
4	15960.00	34.4 AV	54.0	-19.6	1.05 V	190	23.1	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

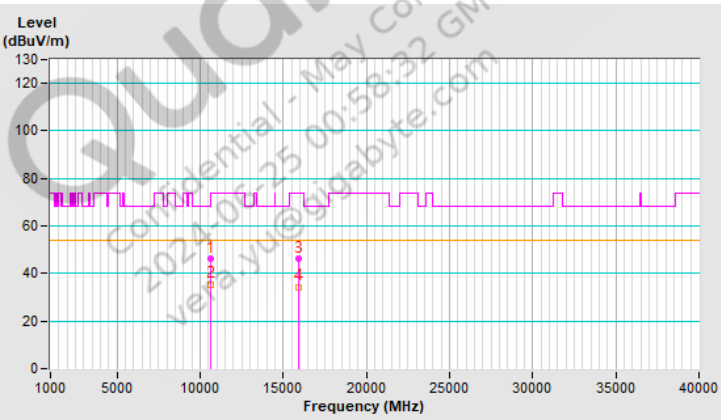


Qualcomm Confidential - May Contain Trade Secrets
2021-05-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT20) 106+26-tone MRU	**Channel**	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11160.00	45.8 PK	74.0	-28.2	1.10 H	200	33.8	12.0
2	11160.00	35.3 AV	54.0	-18.7	1.10 H	200	23.3	12.0
3	#16740.00	45.9 PK	68.2	-22.3	1.28 H	216	30.7	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

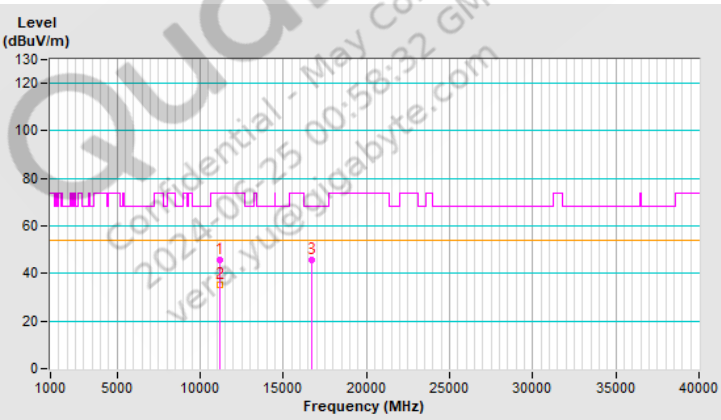


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 106+26-tone MRU	**Channel**	CH 116：5580 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11160.00	46.5 PK	74.0	-27.5	1.14 V	191	34.5	12.0
2	11160.00	35.7 AV	54.0	-18.3	1.14 V	191	23.7	12.0
3	#16740.00	46.1 PK	68.2	-22.1	1.06 V	199	30.9	15.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

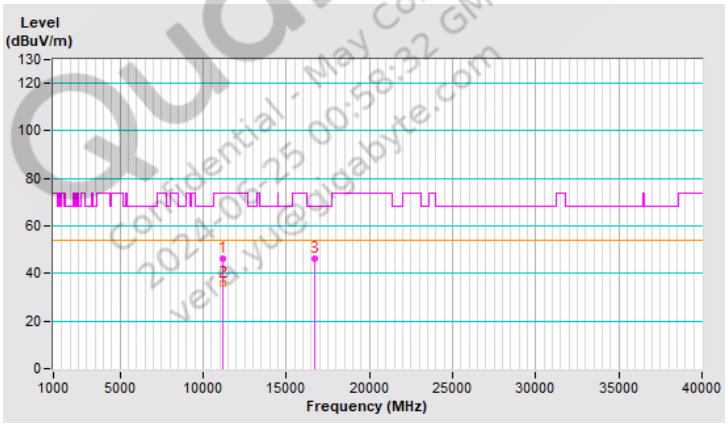


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 106+26-tone MRU	**Channel**	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11650.00	46.0 PK	74.0	-28.0	1.07 H	198	33.5	12.5
2	11650.00	35.8 AV	54.0	-18.2	1.07 H	198	23.3	12.5
3	#17475.00	46.2 PK	68.2	-22.0	1.28 H	234	27.5	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

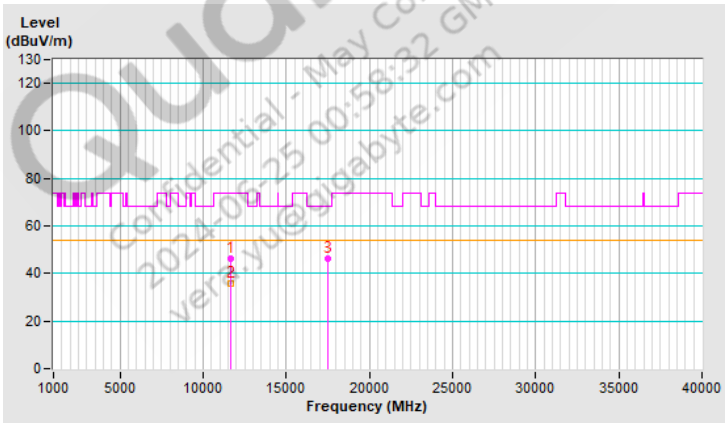


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT20) 106+26-tone MRU	**Channel**	CH 165：5825 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11650.00	46.4 PK	74.0	-27.6	1.12 V	192	33.9	12.5
2	11650.00	35.9 AV	54.0	-18.1	1.12 V	192	23.4	12.5
3	#17475.00	46.1 PK	68.2	-22.1	1.02 V	178	27.4	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

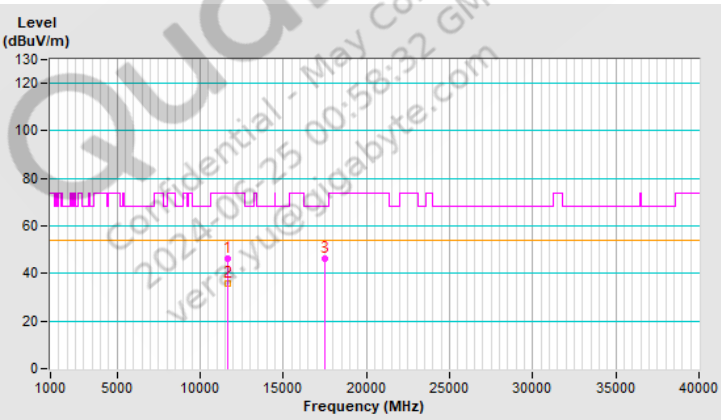


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vernyue@gigabyte.com

RF Mode	802.11be (EHT80) 484+242-tone MRU	**Channel**	CH 42：5210 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10420.00	46.3 PK	68.2	-21.9	1.08 H	202	34.4	11.9
2	15630.00	46.0 PK	74.0	-28.0	1.33 H	205	34.3	11.7
3	15630.00	34.7 AV	54.0	-19.3	1.33 H	205	23.0	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

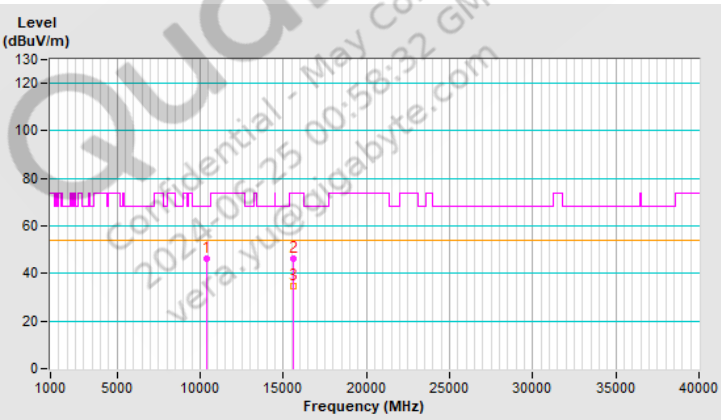


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT80) 484+242-tone MRU	**Channel**	CH 42：5210 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10420.00	47.1 PK	68.2	-21.1	1.09 V	206	35.2	11.9
2	15630.00	46.2 PK	74.0	-27.8	1.04 V	199	34.5	11.7
3	15630.00	34.7 AV	54.0	-19.3	1.04 V	199	23.0	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

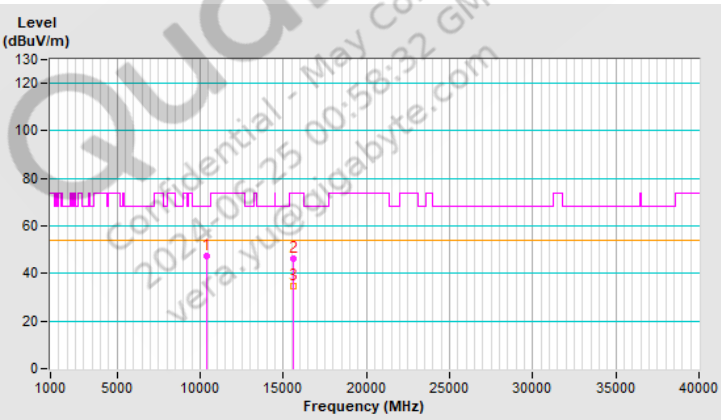


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT80) 484+242-tone MRU	**Channel**	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10580.00	45.9 PK	68.2	-22.3	1.00 H	203	34.2	11.7
2	15870.00	45.9 PK	74.0	-28.1	1.35 H	216	34.9	11.0
3	15870.00	34.3 AV	54.0	-19.7	1.35 H	216	23.3	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

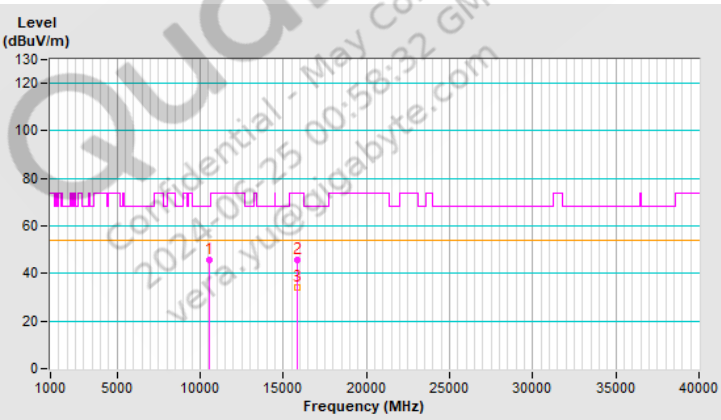


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT80) 484+242-tone MRU	**Channel**	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10580.00	46.1 PK	68.2	-22.1	1.08 V	186	34.4	11.7
2	15870.00	46.8 PK	74.0	-27.2	1.07 V	176	35.8	11.0
3	15870.00	35.1 AV	54.0	-18.9	1.07 V	176	24.1	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

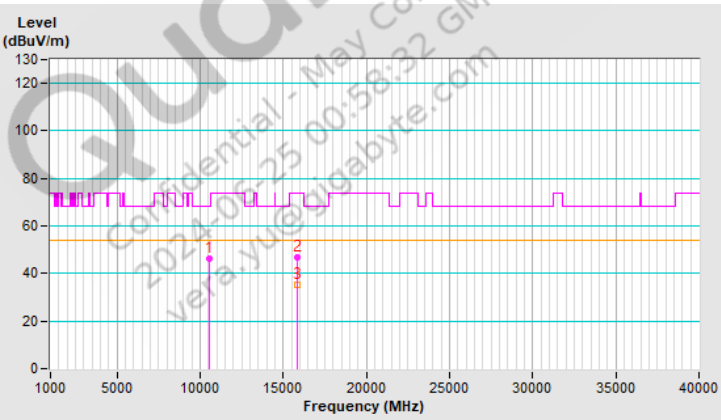


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT80) 484+242-tone MRU	**Channel**	CH 138：5690 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11380.00	46.5 PK	74.0	-27.5	1.00 H	188	33.8	12.7
2	11380.00	35.9 AV	54.0	-18.1	1.00 H	188	23.2	12.7
3	#17070.00	46.0 PK	68.2	-22.2	1.35 H	233	29.7	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

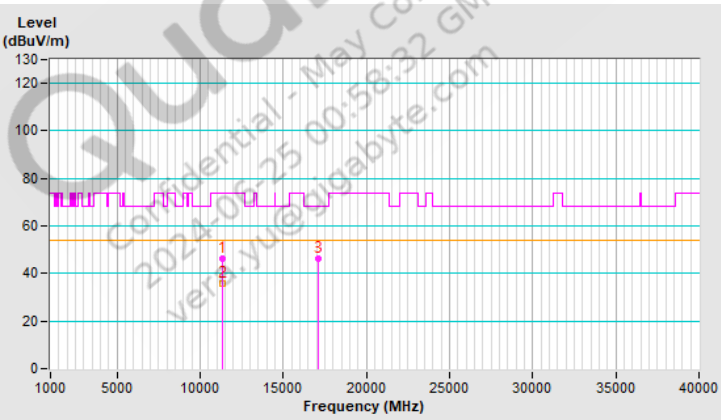


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT80) 484+242-tone MRU	**Channel**	CH 138：5690 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11380.00	46.1 PK	74.0	-27.9	1.14 V	194	33.4	12.7
2	11380.00	35.4 AV	54.0	-18.6	1.14 V	194	22.7	12.7
3	#17070.00	46.6 PK	68.2	-21.6	1.03 V	200	30.3	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

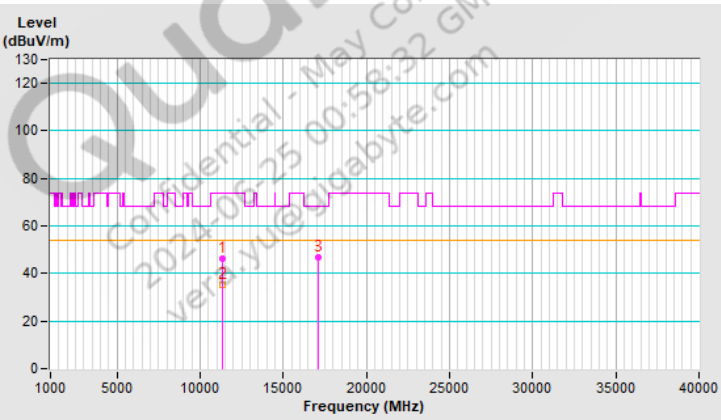


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT80) 484+242-tone MRU	**Channel**	CH 155：5775 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11550.00	46.6 PK	74.0	-27.4	1.09 H	212	33.9	12.7
2	11550.00	36.0 AV	54.0	-18.0	1.09 H	212	23.3	12.7
3	#17325.00	45.8 PK	68.2	-22.4	1.33 H	229	28.8	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

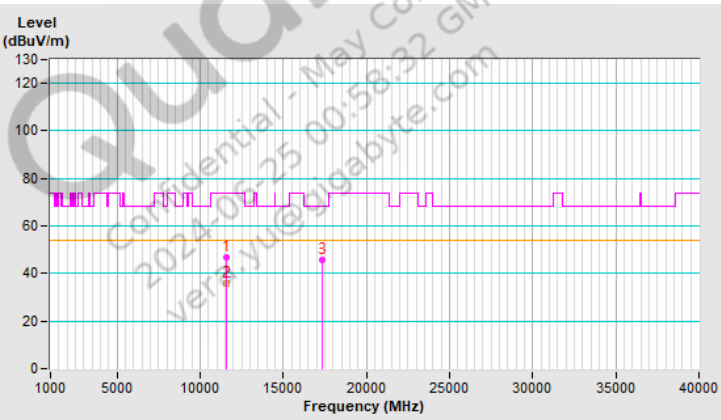


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vernyue@gigabyte.com

RF Mode	802.11be (EHT80) 484+242-tone MRU	**Channel**	CH 155：5775 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11550.00	46.6 PK	74.0	-27.4	1.16 V	204	33.9	12.7
2	11550.00	36.2 AV	54.0	-17.8	1.16 V	204	23.5	12.7
3	#17325.00	46.4 PK	68.2	-21.8	1.07 V	193	29.4	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

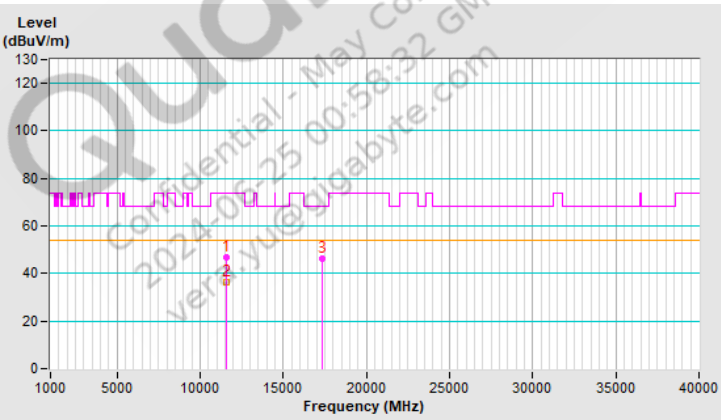


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vernyue@gigabyte.com

RF Mode	802.11be (EHT160) 996+484-tone MRU	**Channel**	CH 50：5250 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10500.00	46.0 PK	68.2	-22.2	1.08 H	192	34.2	11.8
2	15750.00	45.4 PK	74.0	-28.6	1.27 H	222	34.0	11.4
3	15750.00	34.1 AV	54.0	-19.9	1.27 H	222	22.7	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

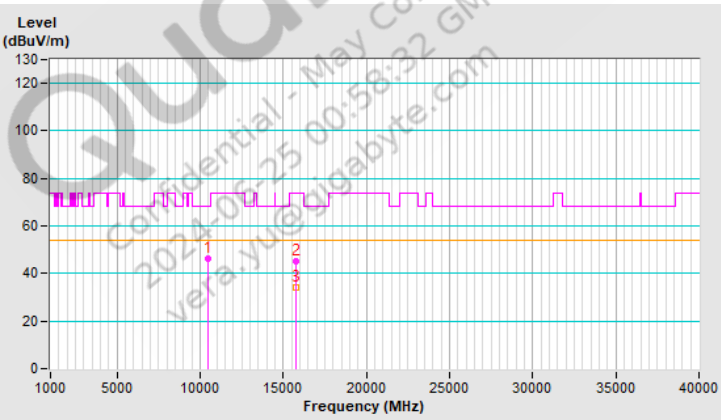


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT160) 996+484-tone MRU	**Channel**	CH 50：5250 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10500.00	46.4 PK	68.2	-21.8	1.09 V	192	34.6	11.8
2	15750.00	47.0 PK	74.0	-27.0	1.11 V	173	35.6	11.4
3	15750.00	35.2 AV	54.0	-18.8	1.11 V	173	23.8	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

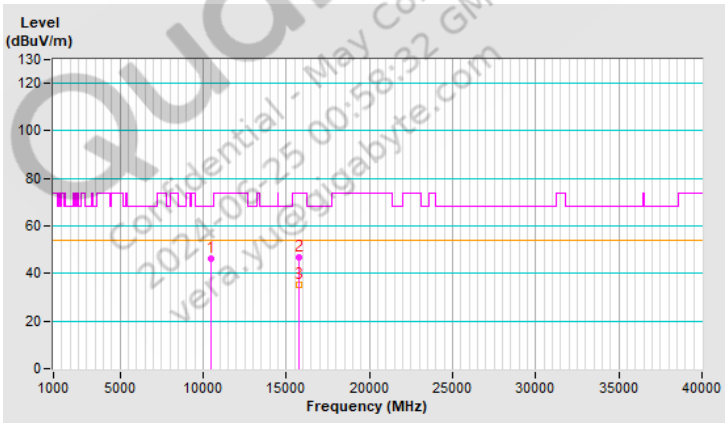


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT160) 996+484-tone MRU	**Channel**	CH 114：5570 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11140.00	46.2 PK	74.0	-27.8	1.06 H	201	34.1	12.1
2	11140.00	36.0 AV	54.0	-18.0	1.06 H	201	23.9	12.1
3	#16710.00	45.5 PK	68.2	-22.7	1.31 H	218	30.6	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

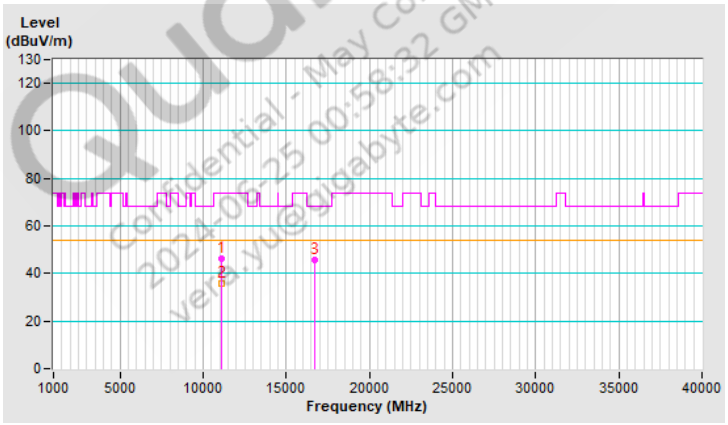


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT160) 996+484-tone MRU	**Channel**	CH 114：5570 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 67% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11140.00	45.9 PK	74.0	-28.1	1.06 V	186	33.8	12.1
2	11140.00	35.3 AV	54.0	-18.7	1.06 V	186	23.2	12.1
3	#16710.00	47.1 PK	68.2	-21.1	1.12 V	184	32.2	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

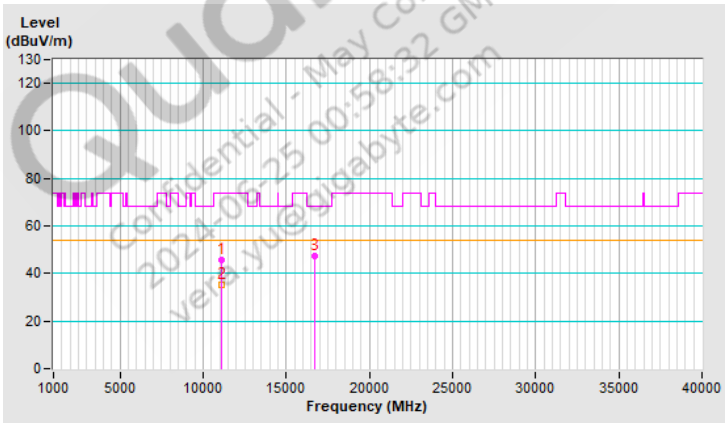


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT80) Punctured by 20 MHz	**Channel**	CH 42：5210 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10420.00	46.4 PK	68.2	-21.8	1.14 H	197	34.5	11.9
2	15630.00	45.3 PK	74.0	-28.7	1.21 H	177	33.6	11.7
3	15630.00	34.1 AV	54.0	-19.9	1.21 H	177	22.4	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

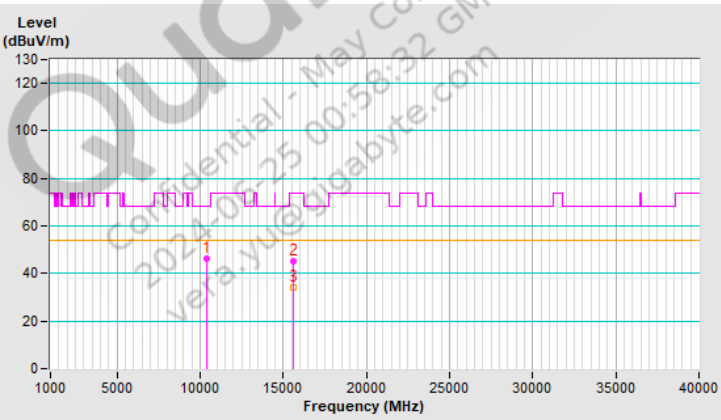


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT80) Punctured by 20 MHz	**Channel**	CH 42：5210 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10420.00	46.1 PK	68.2	-22.1	1.06 V	184	34.2	11.9
2	15630.00	45.5 PK	74.0	-28.5	1.20 V	140	33.8	11.7
3	15630.00	34.1 AV	54.0	-19.9	1.20 V	140	22.4	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

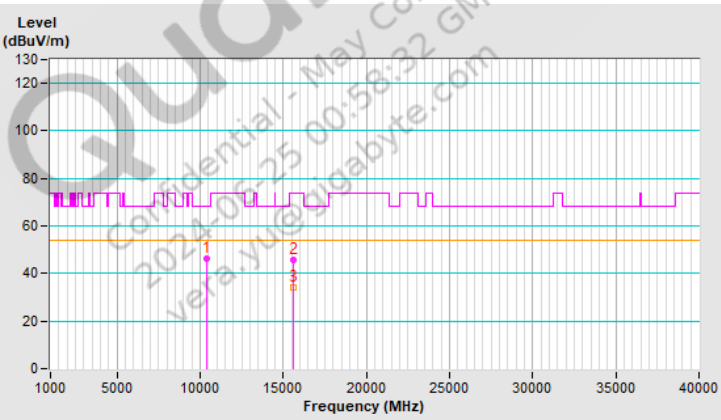


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT80) Punctured by 20 MHz	**Channel**	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10580.00	46.5 PK	68.2	-21.7	1.14 H	197	34.8	11.7
2	15870.00	46.1 PK	74.0	-27.9	1.21 H	177	35.1	11.0
3	15870.00	34.9 AV	54.0	-19.1	1.21 H	177	23.9	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

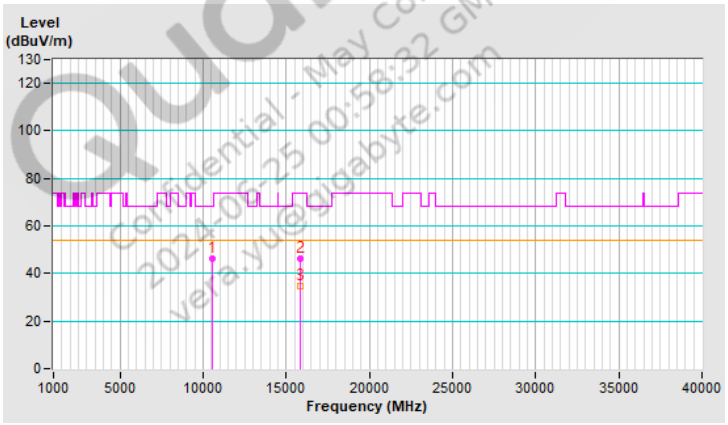


Qualcomm Confidential - May Contain Trade Secrets 2024-05-25 00:58:32 GMT vera.yue@gigabyte.com

RF Mode	802.11be (EHT80) Punctured by 20 MHz	**Channel**	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10580.00	46.2 PK	68.2	-22.0	1.06 V	184	34.5	11.7
2	15870.00	45.7 PK	74.0	-28.3	1.20 V	140	34.7	11.0
3	15870.00	34.4 AV	54.0	-19.6	1.20 V	140	23.4	11.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

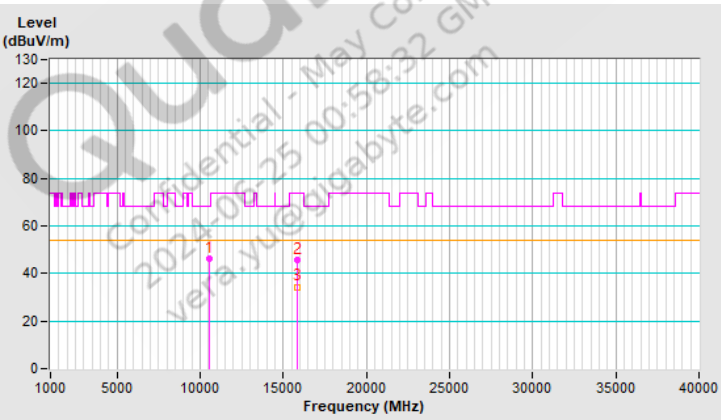


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT80) Punctured by 20 MHz	**Channel**	CH 138：5690 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11380.00	45.8 PK	74.0	-28.2	1.14 H	197	33.1	12.7
2	11380.00	35.2 AV	54.0	-18.8	1.14 H	197	22.5	12.7
3	#17070.00	46.6 PK	68.2	-21.6	1.21 H	177	30.3	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

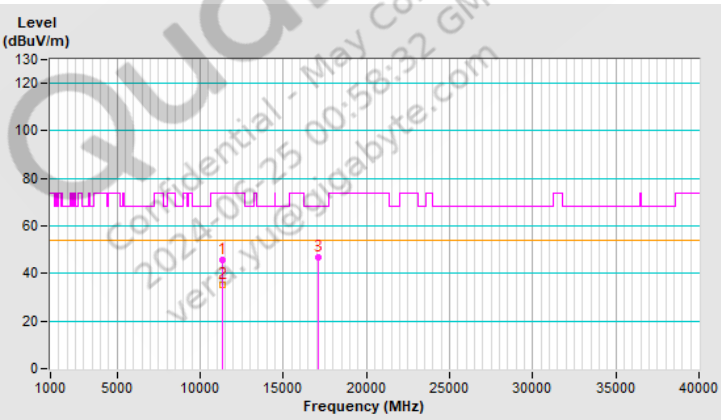


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT80) Punctured by 20 MHz	**Channel**	CH 138：5690 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11380.00	46.1 PK	74.0	-27.9	1.06 V	184	33.4	12.7
2	11380.00	35.4 AV	54.0	-18.6	1.06 V	184	22.7	12.7
3	#17070.00	45.9 PK	68.2	-22.3	1.20 V	140	29.6	16.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

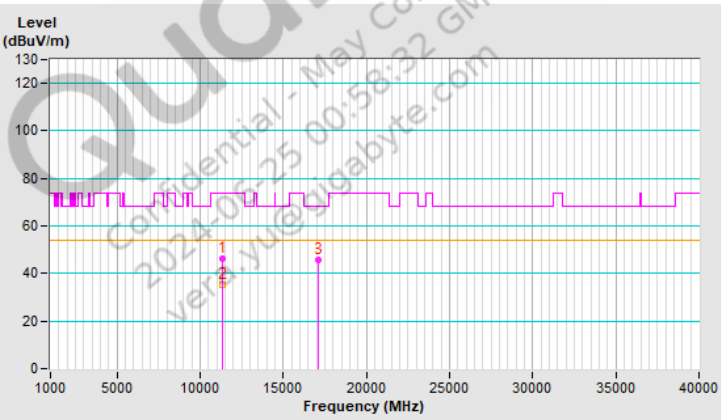


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT80) Punctured by 20 MHz	**Channel**	CH 155：5775 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11550.00	46.3 PK	74.0	-27.7	1.14 H	197	33.6	12.7
2	11550.00	35.9 AV	54.0	-18.1	1.14 H	197	23.2	12.7
3	#17325.00	46.2 PK	68.2	-22.0	1.21 H	177	29.2	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

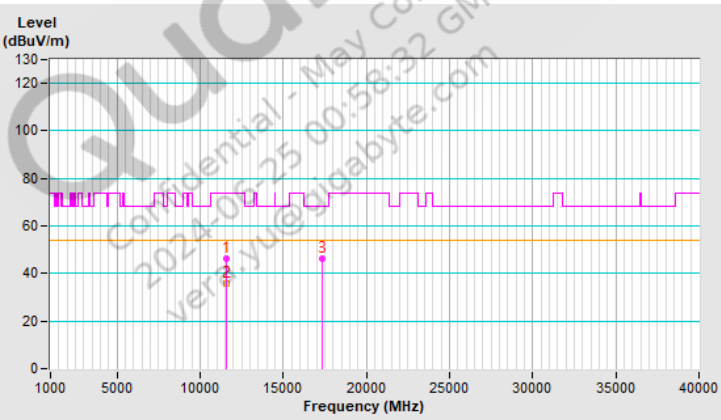


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vernyue@gigabyte.com

RF Mode	802.11be (EHT80) Punctured by 20 MHz	**Channel**	CH 155：5775 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11550.00	46.5 PK	74.0	-27.5	1.06 V	184	33.8	12.7
2	11550.00	35.9 AV	54.0	-18.1	1.06 V	184	23.2	12.7
3	#17325.00	45.8 PK	68.2	-22.4	1.20 V	140	28.8	17.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

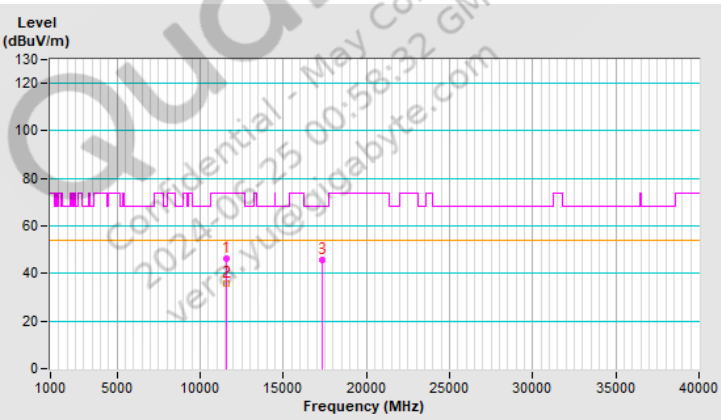


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vernyue@gigabyte.com

RF Mode	802.11be (EHT160) Punctured by 20 MHz	**Channel**	CH 50：5250 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10500.00	46.8 PK	68.2	-21.4	1.14 H	197	35.0	11.8
2	15750.00	45.8 PK	74.0	-28.2	1.21 H	177	34.4	11.4
3	15750.00	34.6 AV	54.0	-19.4	1.21 H	177	23.2	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

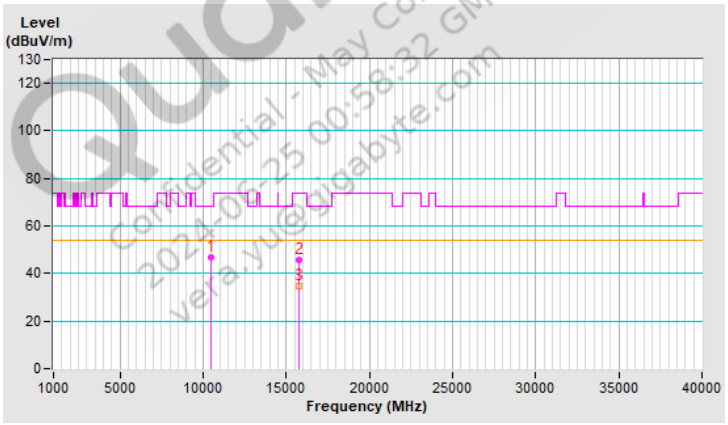


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT160) Punctured by 20 MHz	**Channel**	CH 50：5250 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10500.00	46.3 PK	68.2	-21.9	1.06 V	184	34.5	11.8
2	15750.00	45.9 PK	74.0	-28.1	1.20 V	140	34.5	11.4
3	15750.00	34.5 AV	54.0	-19.5	1.20 V	140	23.1	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

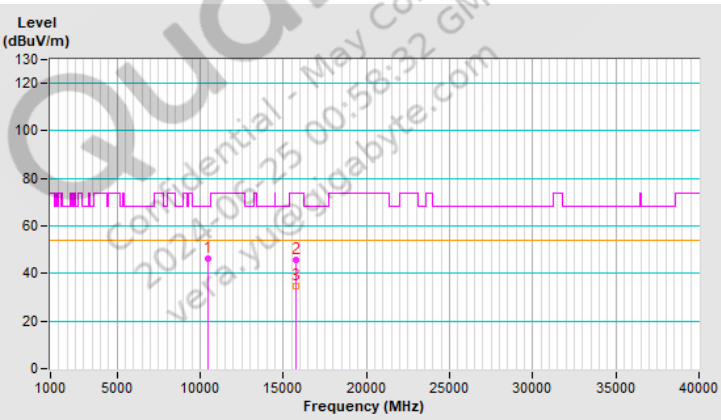


Qualcomm Confidential - May Contain Trade Secrets 2024-05-25 00:58:32 GMT vera.yue@gigabyte.com

RF Mode	802.11be (EHT160) Punctured by 20 MHz	**Channel**	CH 114：5570 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11140.00	46.6 PK	74.0	-27.4	1.14 H	197	34.5	12.1
2	11140.00	35.8 AV	54.0	-18.2	1.14 H	197	23.7	12.1
3	#16710.00	45.7 PK	68.2	-22.5	1.21 H	177	30.8	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

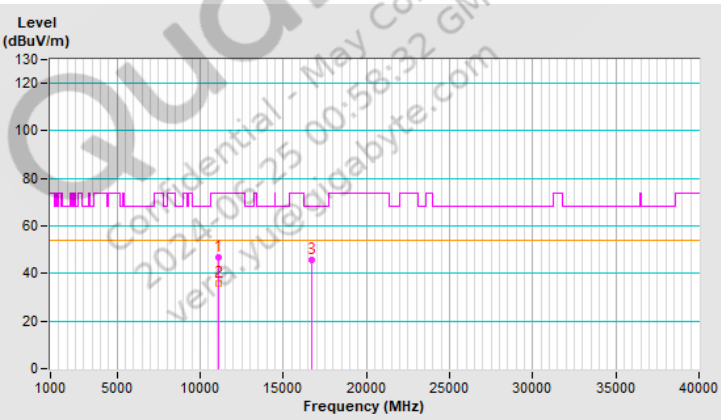


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT160) Punctured by 20 MHz	**Channel**	CH 114：5570 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11140.00	46.8 PK	74.0	-27.2	1.06 V	184	34.7	12.1
2	11140.00	36.0 AV	54.0	-18.0	1.06 V	184	23.9	12.1
3	#16710.00	46.0 PK	68.2	-22.2	1.20 V	140	31.1	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

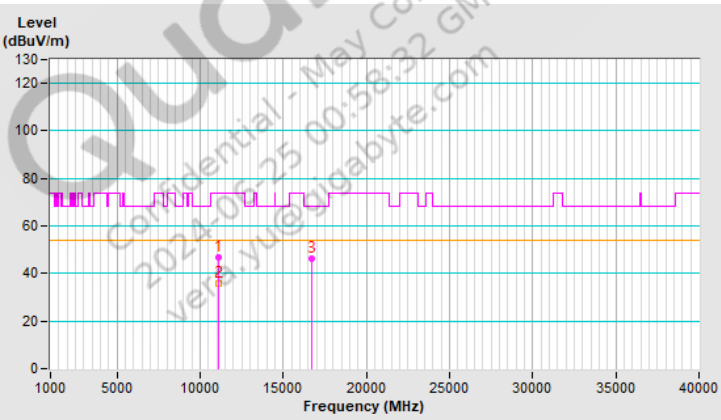


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT160) Punctured by 40 MHz	**Channel**	CH 50：5250 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10500.00	45.7 PK	68.2	-22.5	1.14 H	197	33.9	11.8
2	15750.00	46.3 PK	74.0	-27.7	1.21 H	177	34.9	11.4
3	15750.00	34.7 AV	54.0	-19.3	1.21 H	177	23.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

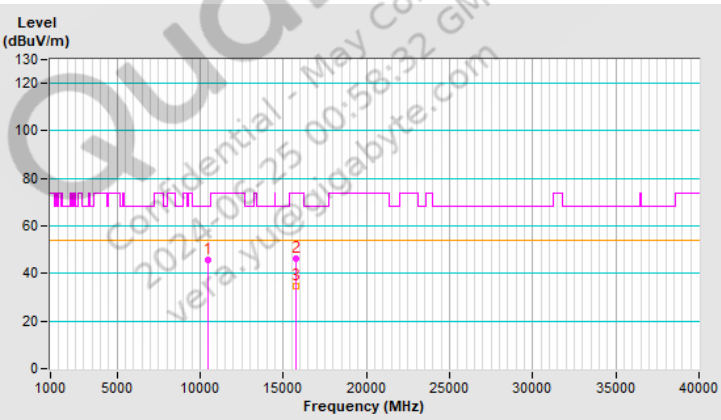


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT160) Punctured by 40 MHz	**Channel**	CH 50：5250 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	#10500.00	46.0 PK	68.2	-22.2	1.06 V	184	34.2	11.8
2	15750.00	45.7 PK	74.0	-28.3	1.20 V	140	34.3	11.4
3	15750.00	34.4 AV	54.0	-19.6	1.20 V	140	23.0	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

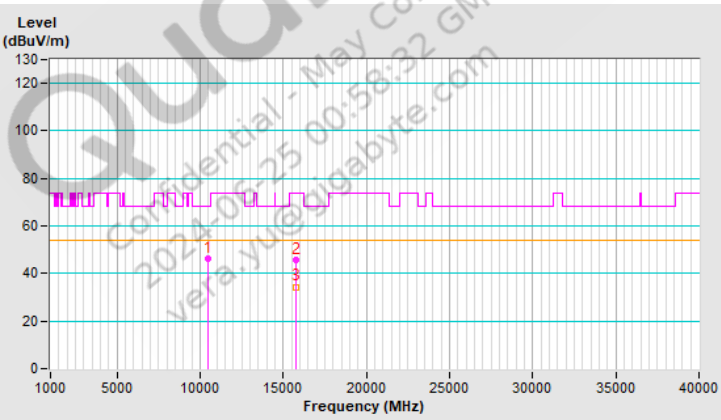


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT160) Punctured by 40 MHz	**Channel**	CH 114：5570 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11140.00	46.5 PK	74.0	-27.5	1.14 H	197	34.4	12.1
2	11140.00	35.6 AV	54.0	-18.4	1.14 H	197	23.5	12.1
3	#16710.00	46.2 PK	68.2	-22.0	1.21 H	177	31.3	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

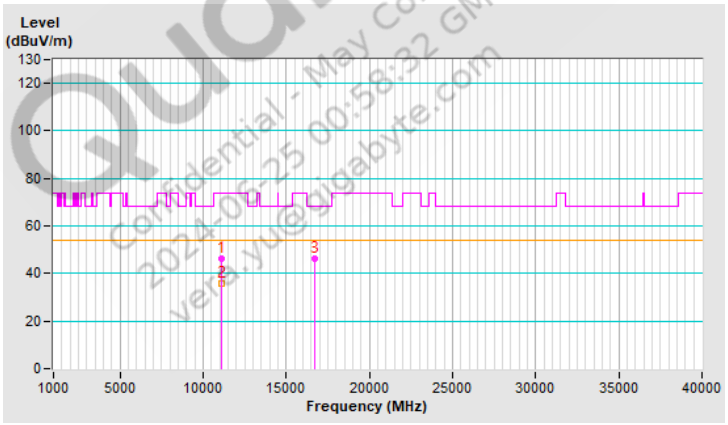


Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

RF Mode	802.11be (EHT160) Punctured by 40 MHz	**Channel**	CH 114：5570 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	28°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	11140.00	46.5 PK	74.0	-27.5	1.06 V	184	34.4	12.1
2	11140.00	35.7 AV	54.0	-18.3	1.06 V	184	23.6	12.1
3	#16710.00	45.3 PK	68.2	-22.9	1.20 V	140	30.4	14.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " # ": The radiated frequency is out of the restricted band.

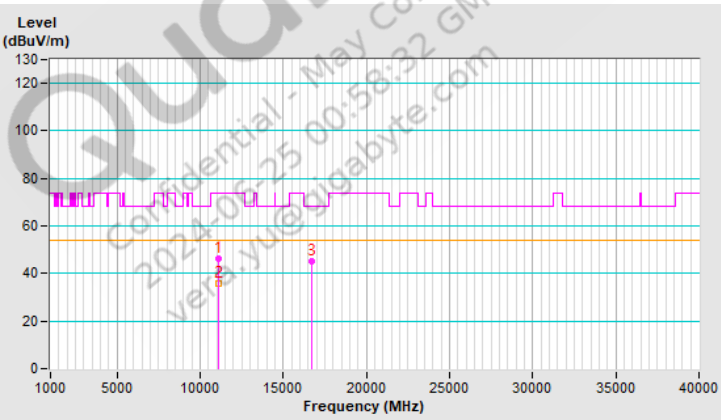

Qualcomm Confidential - May Contain Trade Secrets
2024-05-25 00:58:32 GMT
vera.yue@gigabyte.com

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

9 Appendix A – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab
Tel: 886-3-6668565
Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab
Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@bureauveritas.com
Web Site: http://ee.bureauveritas.com.tw

The address and road map of all our labs can be found in our web site also.

Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yu@gigabyte.com

10 Appendix B – Radiated Emission Measurement

10.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dBµV/m)	AV:54 (dBµV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBµV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	15.407(b)(4)(i)	PK:-27 (dBm/MHz) *1 PK:10 (dBm/MHz) *2 PK:15.6 (dBm/MHz) *3 PK:27 (dBm/MHz) *4	PK: 68.2(dBµV/m) *1 PK:105.2 (dBµV/m) *2 PK: 110.8(dBµV/m) *3 PK:122.2 (dBµV/m) *4
*1 beyond 75 MHz or more above of the band edge.		*2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
*3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		*4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$E = \frac{1000000\sqrt{30P}}{3}$ µV/m, where P is the eirp (Watts).

Qualcomm Confidential - May contain Trade Secrets 2024-06-25 00:58:32 GMT vera.yue@gigabyte.com

10.1.2 Test Instruments

Refer to section 4.9 to get information of the instruments.

10.1.3 Test Procedure

a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is ≥ 1/T (Duty cycle < 98%) or 10Hz (Duty cycle ≥ 98%) for Average detection (AV) at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

10.1.4 Deviation from Test Standard

No deviation.

QualcOMM Confidential - May Contain Trade Secrets 2024-06-25 00:58:52 GMT vera.yu@gigabyte.com

10.1.5 Test Setup

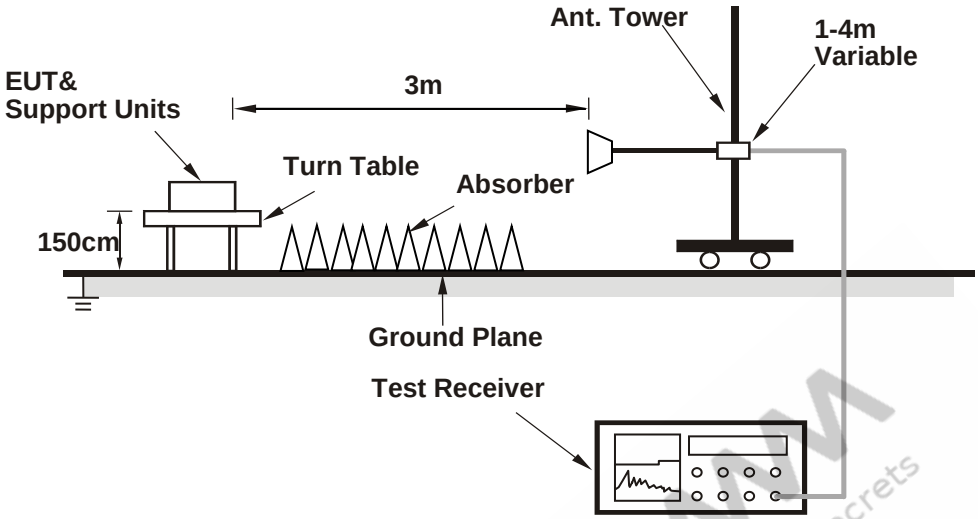

For the actual test configuration, please refer to the attached file (Test Setup Photo).

10.1.6 EUT Operating Condition

Same as 3.6.

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

10.1.7 Test Results

For Antenna Set 1

The EUT's antenna set 3 had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane.**


ABOVE 1GHz DATA

RF Mode	802.11be (EHT80) 484+242-tone MRU	**Channel**	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	5355.57	65.0 PK	74.0	-9.0	1.40 H	358	63.3	1.7
2	**5355.57**	**52.0 AV**	**54.0**	**-2.0**	**1.40 H**	**358**	**50.3**	**1.7**

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

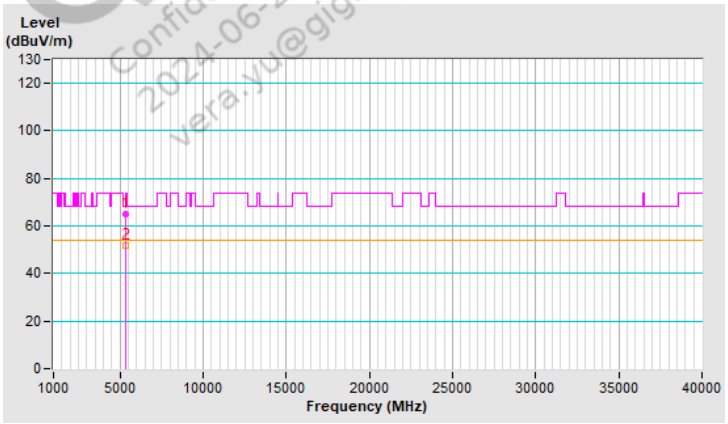


Qualcomm Confidential - May Contain Trade Secrets 2024-06-25 10:58:37 GMT vera.yu@gigabyte.com

RF Mode	802.11be (EHT80) 484+242-tone MRU	**Channel**	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	5355.67	62.5 PK	74.0	-11.5	1.38 V	173	60.8	1.7
2	5355.67	50.5 AV	54.0	-3.5	1.38 V	173	48.8	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

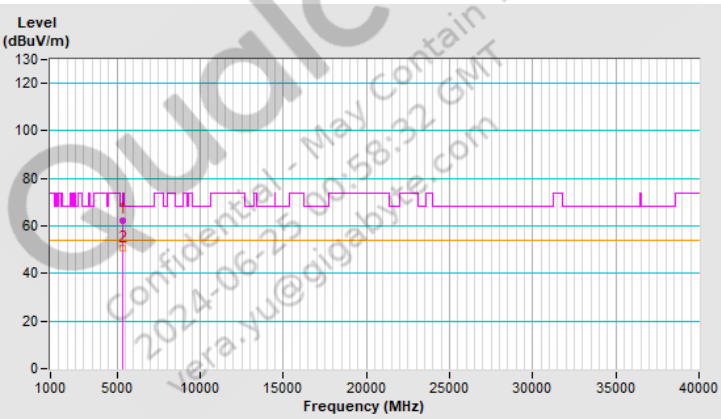


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80) Punctured by 20 MHz	**Channel**	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	5351.90	69.0 PK	74.0	-5.0	1.98 H	181	67.3	1.7
2	5351.90	51.9 AV	54.0	-2.1	1.98 H	181	50.2	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

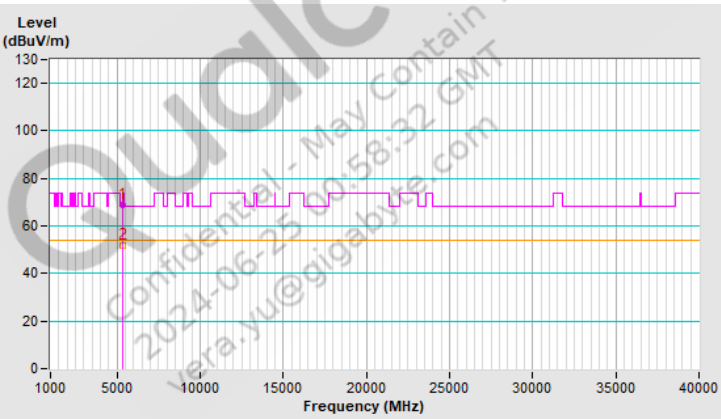


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80) Punctured by 20 MHz	**Channel**	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	5150.00	62.8 PK	74.0	-11.2	1.42 V	158	60.8	2.0
2	5150.00	50.0 AV	54.0	-4.0	1.42 V	158	48.0	2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

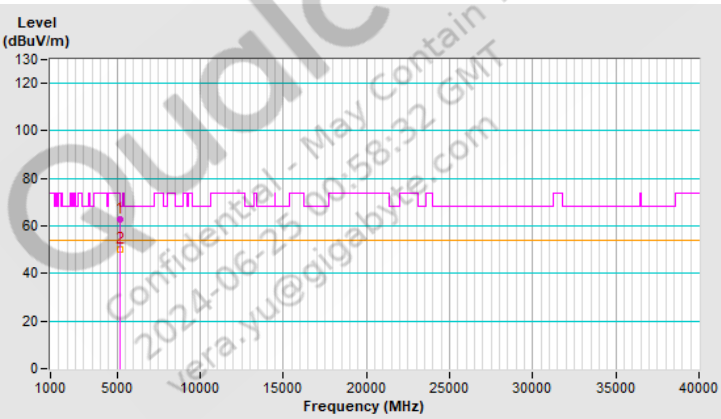

Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

For Antenna Set 3


The EUT's antenna set 3 had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane.**

RF Mode	802.11be (EHT80) 484+242-tone MRU	**Channel**	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	5355.57	64.1 PK	74.0	-9.9	1.49 H	360	62.4	1.7
2	**5355.57**	**52.0 AV**	**54.0**	**-2.0**	**1.49 H**	**360**	**50.3**	**1.7**

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

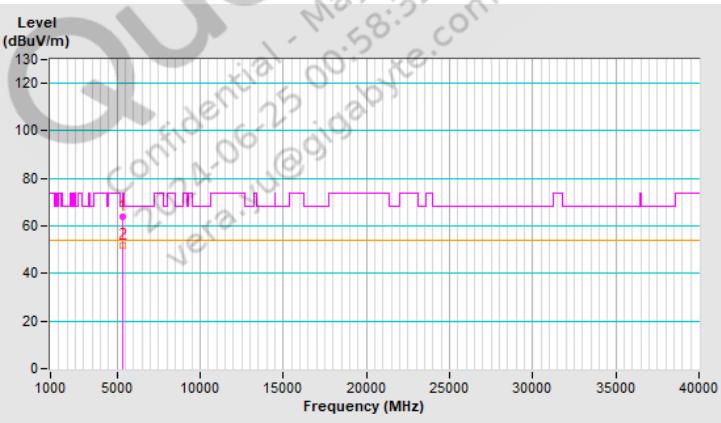


Qualcomm Confidential - May contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80) 484+242-tone MRU	**Channel**	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	5355.67	62.6 PK	74.0	-11.4	1.38 V	186	60.9	1.7
2	5355.67	50.5 AV	54.0	-3.5	1.38 V	186	48.8	1.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

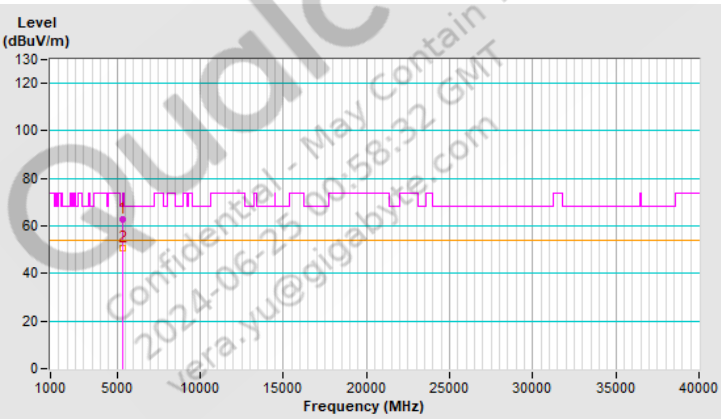


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80) Punctured by 20 MHz	**Channel**	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	5351.90	69.2 PK	74.0	-4.8	1.90 H	189	67.5	1.7
2	**5351.90**	**52.0 AV**	**54.0**	**-2.0**	**1.90 H**	**189**	**50.3**	**1.7**

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

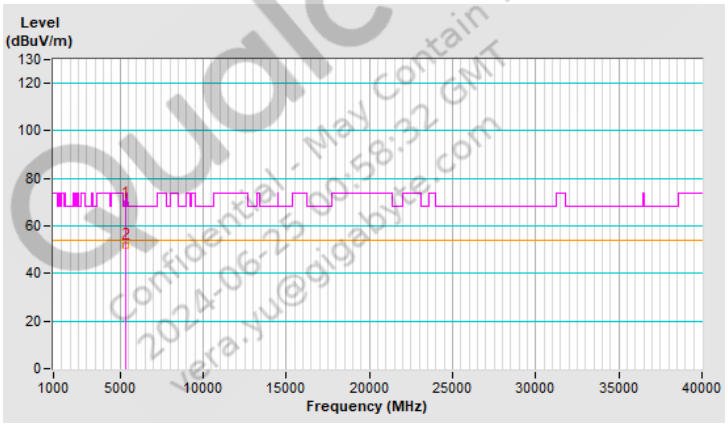


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com

RF Mode	802.11be (EHT80) Punctured by 20 MHz	**Channel**	CH 58：5290 MHz
Frequency Range	1 GHz ~ 40 GHz	**Detector Function & Bandwidth**	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
Input Power (System)	120 Vac, 60 Hz	**Environmental Conditions**	25°C, 75% RH
Tested By	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3m								
No	**Frequency (MHz)**	**Emission Level (dBuV/m)**	**Limit (dBuV/m)**	**Margin (dB)**	**Antenna Height (m)**	**Table Angle (Degree)**	**Raw Value (dBuV)**	**Correction Factor (dB/m)**
1	5150.00	63.4 PK	74.0	-10.6	1.44 V	196	61.4	2.0
2	5150.00	50.7 AV	54.0	-3.3	1.44 V	196	48.7	2.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.

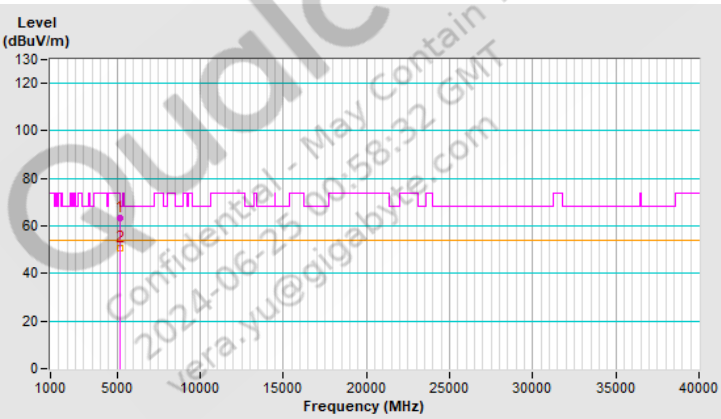


Qualcomm Confidential - May Contain Trade Secrets
2024-06-25 00:58:32 GMT
vera.yu@gigabyte.com


Plot of Band Edge with For Antenna Set 1

802.11be (EHT80) 484+242-tone MRU Channel 58


Horizontal (Peak)

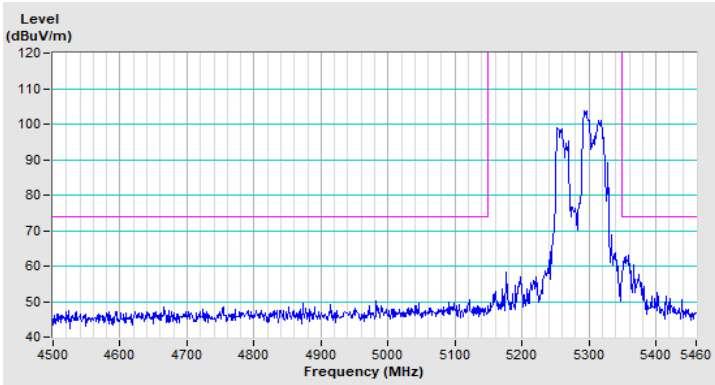


Horizontal (Average)

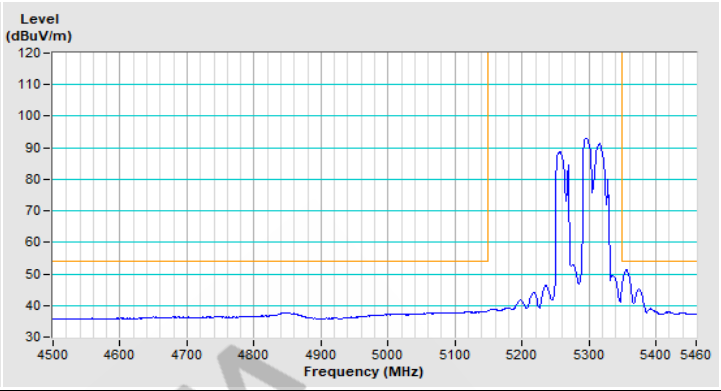

Vertical (Peak)

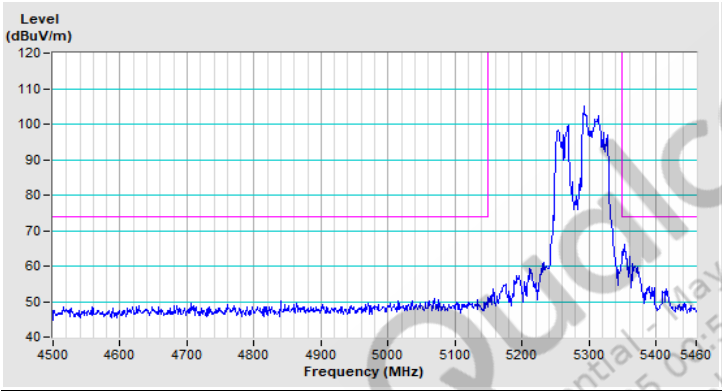


Vertical (Average)

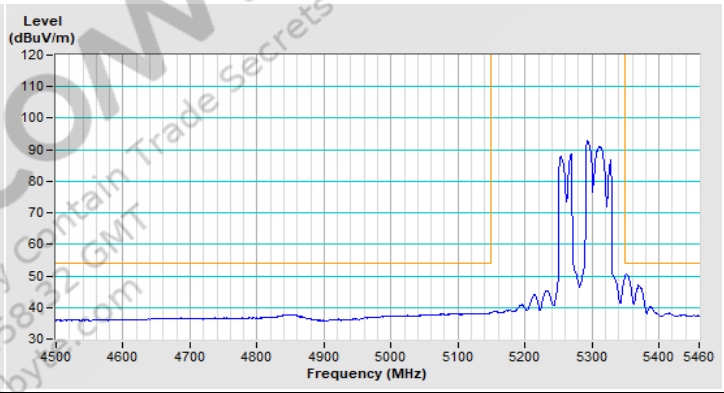


802.11be (EHT80) Punctured by 20 MHz Channel 58


Horizontal (Peak)

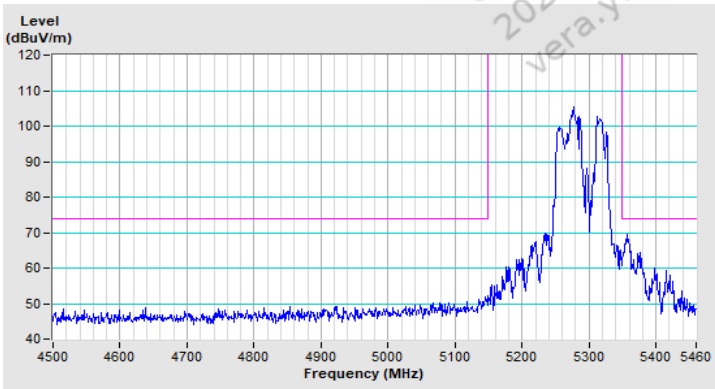


Horizontal (Average)

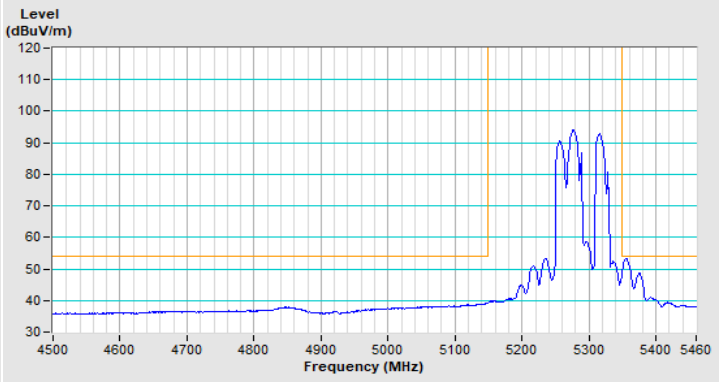

Vertical (Peak)

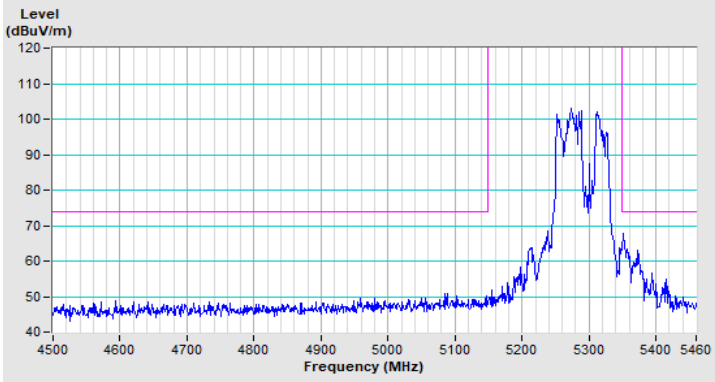

Vertical (Average)

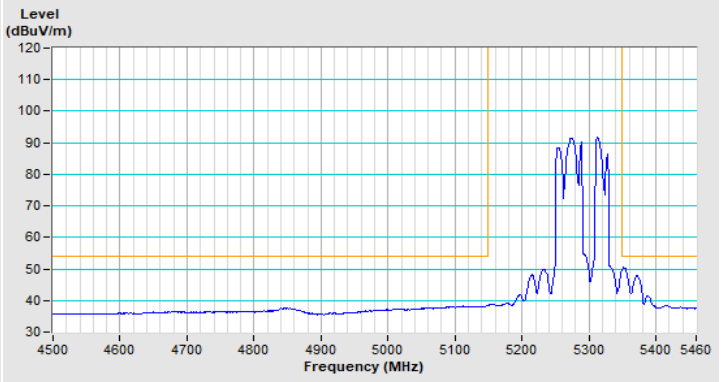


Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 09:58:32 GMT
vera.yu@gigabyte.com


Plot of Band Edge with For Antenna Set 3

802.11be (EHT80) 484+242-tone MRU Channel 58


Horizontal (Peak)

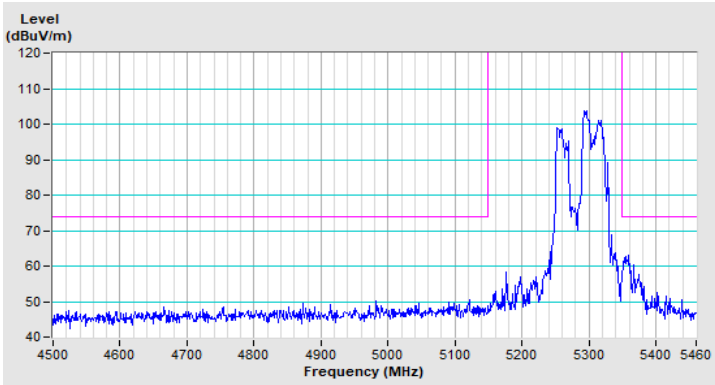


Horizontal (Average)

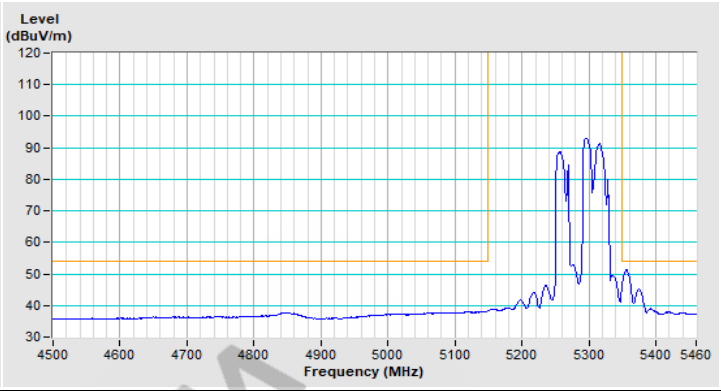

Vertical (Peak)

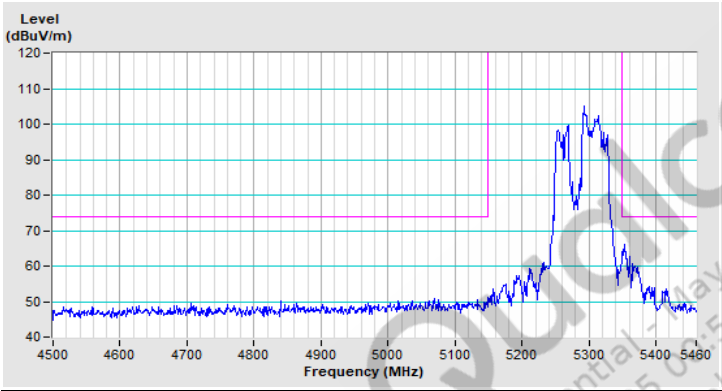


Vertical (Average)

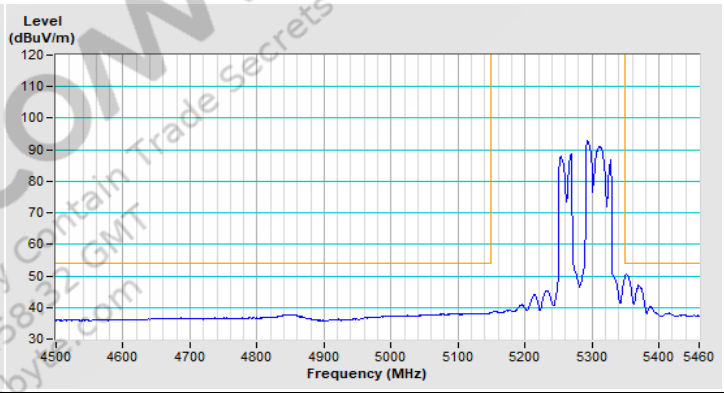


802.11be (EHT80) Punctured by 20 MHz Channel 58


Horizontal (Peak)

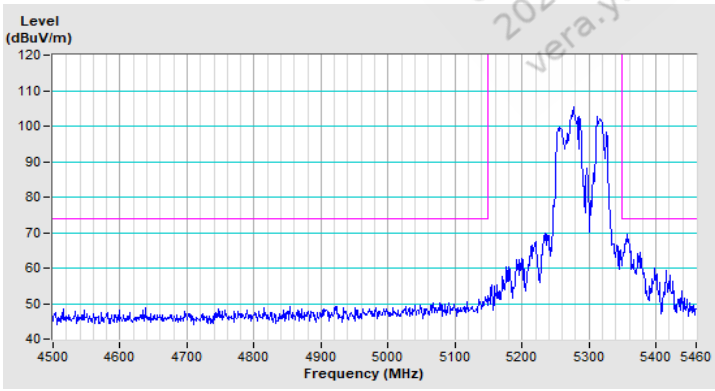


Horizontal (Average)

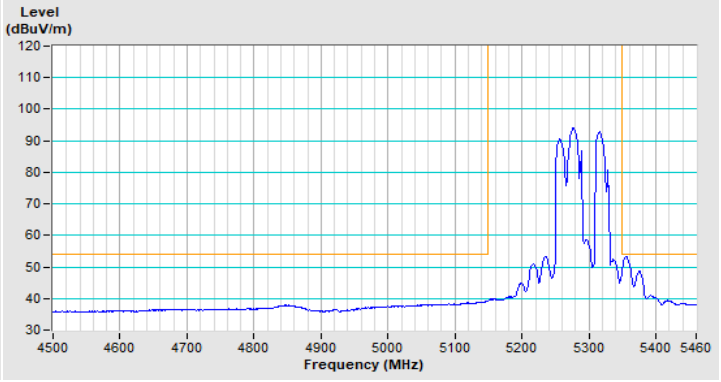

Vertical (Peak)

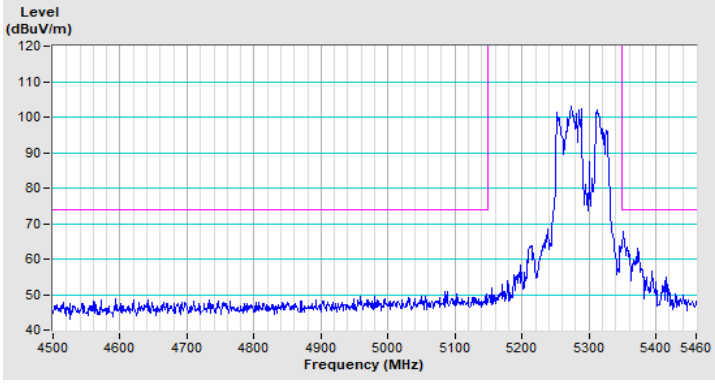

Vertical (Average)

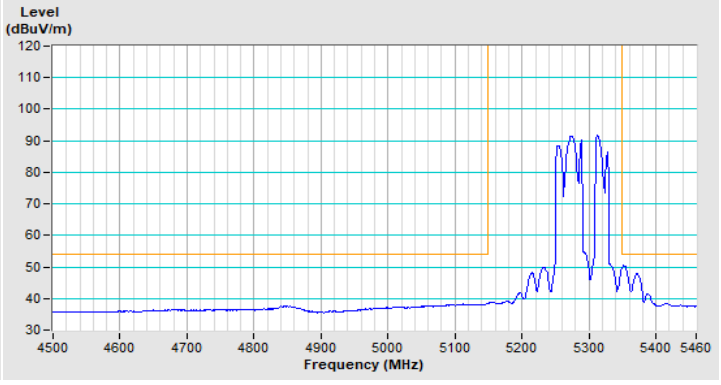

Qualcomm
Confidential - May Contain Trade Secrets
2024-06-25 09:58:32 GMT
vera.yu@gigabyte.com