Testing Laboratory 3787

RADIO TEST REPORT

FCC ID	:	TX2-RTL8852CE
Equipment	:	11ax RTL8852CE Combo module
Brand Name	:	REALTEK
Model Name	:	RTL8852CE
Applicant	:	Realtek Semiconductor Corp. No. 2,Innovation Road II, Hsinchu Science Park, Hsinchu 300,Taiwan
Manufacturer	:	Realtek Semiconductor Corp. No. 2,Innovation Road II, Hsinchu Science Park, Hsinchu 300,Taiwan
Standard	:	47 CFR FCC Part 15.407

The product was received on Nov. 05, 2021, and testing was started from Mar. 16, 2022 and completed on Aug. 08, 2022. We, Sporton International Inc. Hsinchu Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Hsinchu Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

Sporton International Inc. Hsinchu Laboratory
No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302010, Taiwan

Table of Contents

History of this test report **3**

Summary of Test Result **4**

1 General Description **5**

1.1 Information 5
1.2 Applicable Standards 13
1.3 Testing Location Information 13
1.4 Measurement Uncertainty 14

2 Test Configuration of EUT **15**

2.1 Test Channel Mode 15
2.2 The Worst Case Measurement Configuration 28
2.3 EUT Operation during Test 31
2.4 Accessories 31
2.5 Support Equipment 32
2.6 Test Setup Diagram 33

3 Transmitter Test Result **36**

3.1 AC Power-line Conducted Emissions 36
3.2 Emission Bandwidth 38
3.3 Maximum Output Power 40
3.4 Power Spectral Density 43
3.5 Unwanted Emissions 46

4 Test Equipment and Calibration Data **50**

Appendix A. Test Results of AC Power-line Conducted Emissions

Appendix B. Test Results of Emission Bandwidth

Appendix C. Test Results of Maximum Output Power

Appendix D. Test Results of Power Spectral Density

Appendix E. Test Results of Unwanted Emissions

Appendix F. Test Results of Radiated Emission Co-location

Appendix G. Test Photos

Photographs of EUT v01

History of this test report

Report No.	Version	Description	Issued Date
FR1N0223-06AB	01	Initial issue of report	Sep. 14, 2022

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Output Power	PASS	-
3.4	15.407(a)	Power Spectral Density	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
Note: Reference to Sporton Project No.: 1N0223.				

Declaration of Conformity:
1. The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results. 2. The measurement uncertainty please refer to report "Measurement Uncertainty".
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen
Report Producer: Sandy Chuang

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5150-5250	a, n (HT20), ac (VHT20), ax (HEW20)	5180-5240	36-48 [4]
5250-5350		5260-5320	52-64 [4]
5470-5725		5500-5720	100-144 [12]
5725-5850		5745-5825	149-165 [5]
5150-5250	n (HT40), ac (VHT40), ax (HEW40)	5190-5230	38-46 [2]
5250-5350		5270-5310	54-62 [2]
5470-5725		5510-5710	102-142 [6]
5725-5850		5755-5795	151-159 [2]
5150-5250	ac (VHT80), ax (HEW80)	5210	42 [1]
5250-5350		5290	58 [1]
5470-5725		5530-5690	106-138 [3]
5725-5850		5775	155 [1]
5150-5350	ac (VHT160), ax (HEW160)	5250	50 [1]
5470-5725		5570	114 [1]

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11a	20	1TX/2TX
5.15-5.25GHz	802.11n HT20	20	1TX/2TX
5.15-5.25GHz	802.11n HT20-BF	20	2TX
5.15-5.25GHz	802.11ac VHT20	20	1TX/2TX
5.15-5.25GHz	802.11ac VHT20-BF	20	2TX
5.15-5.25GHz	802.11ax HEW20	20	1TX/2TX
5.15-5.25GHz	802.11ax HEW20-BF	20	2TX
5.15-5.25GHz	802.11n HT40	40	1TX/2TX
5.15-5.25GHz	802.11n HT40-BF	40	2TX
5.15-5.25GHz	802.11ac VHT40	40	1TX/2TX
5.15-5.25GHz	802.11ac VHT40-BF	40	2TX
5.15-5.25GHz	802.11ax HEW40	40	1TX/2TX
5.15-5.25GHz	802.11ax HEW40-BF	40	2TX
5.15-5.25GHz	802.11ac VHT80	80	1TX/2TX
5.15-5.25GHz	802.11ac VHT80-BF	80	2TX
5.15-5.25GHz	802.11ax HEW80	80	1TX/2TX

Band	Mode	BWch (MHz)	Nant
5.15-5.25GHz	802.11ax HEW80-BF	80	2TX
5.15-5.35GHz	802.11ac VHT160	160	1TX/2TX
5.15-5.35GHz	802.11ac VHT160-BF	160	2TX
5.15-5.35GHz	802.11ax HEW160	160	1TX/2TX
5.15-5.35GHz	802.11ax HEW160-BF	160	2TX
5.25-5.35GHz	802.11a	20	1TX/2TX
5.25-5.35GHz	802.11n HT20	20	1TX/2TX
5.25-5.35GHz	802.11n HT20-BF	20	2TX
5.25-5.35GHz	802.11ac VHT20	20	1TX/2TX
5.25-5.35GHz	802.11ac VHT20-BF	20	2TX
5.25-5.35GHz	802.11ax HEW20	20	1TX/2TX
5.25-5.35GHz	802.11ax HEW20-BF	20	2TX
5.25-5.35GHz	802.11n HT40	40	1TX/2TX
5.25-5.35GHz	802.11n HT40-BF	40	2TX
5.25-5.35GHz	802.11ac VHT40	40	1TX/2TX
5.25-5.35GHz	802.11ac VHT40-BF	40	2TX
5.25-5.35GHz	802.11ax HEW40	40	1TX/2TX
5.25-5.35GHz	802.11ax HEW40-BF	40	2TX
5.25-5.35GHz	802.11ac VHT80	80	1TX/2TX
5.25-5.35GHz	802.11ac VHT80-BF	80	2TX
5.25-5.35GHz	802.11ax HEW80	80	1TX/2TX
5.25-5.35GHz	802.11ax HEW80-BF	80	2TX
5.47-5.725GHz	802.11a	20	1TX/2TX
5.47-5.725GHz	802.11n HT20	20	1TX/2TX
5.47-5.725GHz	802.11n HT20-BF	20	2TX
5.47-5.725GHz	802.11ac VHT20	20	1TX/2TX
5.47-5.725GHz	802.11ac VHT20-BF	20	2TX
5.47-5.725GHz	802.11ax HEW20	20	1TX/2TX
5.47-5.725GHz	802.11ax HEW20-BF	20	2TX
5.47-5.725GHz	802.11n HT40	40	1TX/2TX
5.47-5.725GHz	802.11n HT40-BF	40	2TX
5.47-5.725GHz	802.11ac VHT40	40	1TX/2TX
5.47-5.725GHz	802.11ac VHT40-BF	40	2TX
5.47-5.725GHz	802.11ax HEW40	40	1TX/2TX
5.47-5.725GHz	802.11ax HEW40-BF	40	2TX
5.47-5.725GHz	802.11ac VHT80	80	1TX/2TX
5.47-5.725GHz	802.11ac VHT80-BF	80	2TX
5.47-5.725GHz	802.11ax HEW80	80	1TX/2TX
5.47-5.725GHz	802.11ax HEW80-BF	80	2TX
5.725-5.85GHz	802.11a	20	1TX/2TX

Band	Mode	BWch (MHz)	Nant
5.725-5.85GHz	802.11n HT20	20	1TX/2TX
5.725-5.85GHz	802.11n HT20-BF	20	2TX
5.725-5.85GHz	802.11ac VHT20	20	1TX/2TX
5.725-5.85GHz	802.11ac VHT20-BF	20	2TX
5.725-5.85GHz	802.11ax HEW20	20	1TX/2TX
5.725-5.85GHz	802.11ax HEW20-BF	20	2TX
5.725-5.85GHz	802.11n HT40	40	1TX/2TX
5.725-5.85GHz	802.11n HT40-BF	40	2TX
5.725-5.85GHz	802.11ac VHT40	40	1TX/2TX
5.725-5.85GHz	802.11ac VHT40-BF	40	2TX
5.725-5.85GHz	802.11ax HEW40	40	1TX/2TX
5.725-5.85GHz	802.11ax HEW40-BF	40	2TX
5.725-5.85GHz	802.11ac VHT80	80	1TX/2TX
5.725-5.85GHz	802.11ac VHT80-BF	80	2TX
5.725-5.85GHz	802.11ax HEW80	80	1TX/2TX
5.725-5.85GHz	802.11ax HEW80-BF	80	2TX
5.47-5.725GHz	802.11ac VHT160	160	1TX/2TX
5.47-5.725GHz	802.11ac VHT160-BF	160	2TX
5.47-5.725GHz	802.11ax HEW160	160	1TX/2TX
5.47-5.725GHz	802.11ax HEW160-BF	160	2TX

Note:
- 11a, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- VHT20, VHT40, VHT80 and VHT 160 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- HEW20, HEW40, HEW80 and HEW 160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- BWch is the nominal channel bandwidth.

1.1.2 Antenna Information

Ant.	Port		Brand	Model Name	Antenna Type	Connector	Gain (dBi)
	WLAN 2.4GHz / 5GHz / 6GHz	Bluetooth					
1	1/2	1	ARISTOTLE	RFA-27-JP378-4B-200	Monopole	I-PEX	Note 1
2	1/2	1	ARISTOTLE	RFA-27-JP326-MH4300	PIFA	I-PEX	
3	1/2	1	ARISTOTLE	RFA-27-C38H1-MH4300	Dipole	I-PEX	

Note 1

Ant.	Port		Gain (dBi)		
	WLAN 2.4GHz / 5GHz / 6GHz	Bluetooth	WLAN 2.4GHz	WLAN 5GHz / 6GHz	Bluetooth
1	1/2	1	3.38	4.86	3.38
2	1/2	1	3.50	5.00	3.50
3	1/2	1	3.00	5.00	3.00

Note 2: The above information was declared by manufacturer.
Note 3: For Conducted measurement Test: Only the highest gain antenna “Ant. 2” was selected to perform the test and recorded in this report.

<For WLAN 2.4GHz function>
For IEEE 802.11b/g/n/VHT/ax (1TX/2RX):
For Conducted:
The EUT supports the antenna with TX diversity functions.
Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.
The Port 1 generated the worst case, so it was selected to test and record in the report.
Port 1 and Port 2 could receive simultaneously
For Radiated:
The EUT supports the antenna with TX diversity functions.
Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.
The Port 2 generated the worst case, so it was selected to test and record in the report.
Port 1 and Port 2 could receive simultaneously
For IEEE 802.11b/g/n/VHT/ax (2TX/2RX):
Port 1 and Port 2 can be used as transmitting/receiving antenna.
Port 1 and Port 2 could transmit/receive simultaneously.

<For WLAN 5GHz function>
For IEEE 802.11a/n/ac/ax (1TX/2RX):
The EUT supports the antenna with TX diversity functions.
Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.
The Port 1 generated the worst case, so it was selected to test and record in the report.
Port 1 and Port 2 could receive simultaneously
For IEEE 802.11a/n/ac/ax (2TX/2RX):
Port 1 and Port 2 can be used as transmitting/receiving antenna.
Port 1 and Port 2 could transmit/receive simultaneously.

<For WLAN 6GHz function>
For IEEE 802.11ax (1TX/2RX):
The EUT supports the antenna with TX diversity functions.
Both Port 1 and Port 2 support transmit and receive functions, but only one of them will be used at one time.
The Port 1 generated the worst case, so it was selected to test and record in the report.
Port 1 and Port 2 could receive simultaneously
For IEEE 802.11ax (2TX/2RX):
Port 1 and Port 2 can be used as transmitting/receiving antenna.
Port 1 and Port 2 could transmit/receive simultaneously.

<For Bluetooth function> (1TX/1RX):
Only Port 1 can be used as transmitting/receiving antenna.

Type	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$Directional Gain = 10 \cdot \log\left[\frac{\sum_{i=1}^{N_{SS}}\left\{\sum_{k=1}^{N_{ANT}} g_{i,k}\right\}^2}{N_{ANT}}\right]$
BF	$Directional Gain = 10 \cdot \log\left[\frac{\sum_{i=1}^{N_{SS}}\left\{\sum_{k=1}^{N_{ANT}} g_{i,k}\right\}^2}{N_{ANT}}\right]$	$Directional Gain = 10 \cdot \log\left[\frac{\sum_{i=1}^{N_{SS}}\left\{\sum_{k=1}^{N_{ANT}} g_{i,k}\right\}^2}{N_{ANT}}\right]$

Ex.

Directional Gain (NSS1) formula : $Directional Gain = 10 \cdot \log\left[\frac{\sum_{i=1}^{N_{SS}}\left\{\sum_{k=1}^{N_{ANT}} g_{i,k}\right\}^2}{N_{ANT}}\right]$

$NSS1(g1,1) = 10^{G1/20}$; $NSS1(g1,2) = 10^{G2/20}$

$gj,k = (Nss1(g1,1) + Nss1(g1,2))^2$

$DG = 10\log[(Nss1(g1,1) + Nss1(g1,2) / N_{ANT}] => 10\log[(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}]$

Where ;

Monopole Antenna

2.4G G1 = 3.38 dBi ; G2 = 3.38 dBi ; DG=6.39 dBi

5G G1 = 4.86 dBi ; G2 = 4.86 dBi ; DG=7.87dBi

6G G1 = 4.86 dBi ; G2 = 4.86 dBi ; DG=7.87 dBi

PIFA Antenna

2.4G G1 = 3.5 dBi ; G2 = 3.5 dBi ; DG=6.51 dBi

5G G1 = 5 dBi ; G2 =5 dBi ; DG=8.01dBi

6G G1 = 5 dBi ; G2 =5 dBi ; DG=8.01dBi

Dipole Antenna

2.4G G1 = 3 dBi ; G2 = 3 dBi ; DG=6.01 dBi

5G G1 = 5 dBi ; G2 =5 dBi ; DG=8.01dBi

6G G1 = 5 dBi ; G2 =5 dBi ; DG=8.01dBi

1.1.3 Test Mode of Partial RU

Mode		Partial RU		
802.11ax HEW20	1TX	26	52	106
	2TX	26	52	106

1.1.4 Mode Test Duty Cycle

<Full RU>
Non-Beamforming Mode:

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11a	0.995	0.02	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11ac VHT20	0.993	0.03	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11ax HEW20	0.993	0.03	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11ac VHT40	0.987	0.06	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11ax HEW40	0.987	0.06	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11ac VHT80	0.973	0.12	288.75u	10k
802.11ax HEW80	0.977	0.1	290u	10k
802.11ac VHT160	0.953	0.21	166.25u	10k
802.11ax HEW160	0.961	0.17	168.125u	10k

Beamforming Mode:

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11ac VHT20-BF	0.993	0.03	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11ax HEW20-BF	0.993	0.03	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11ac VHT40-BF	0.987	0.06	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11ax HEW40-BF	0.987	0.06	n/a (DC>=0.98)	n/a (DC>=0.98)
802.11ac VHT80-BF	0.973	0.12	288.75u	10k
802.11ax HEW80-BF	0.977	0.1	290u	10k
802.11ac VHT160-BF	0.953	0.21	166.25u	10k
802.11ax HEW160-BF	0.961	0.17	168.125u	10k

<Partial RU>

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11ax HEW20	0.999	0.01	n/a (DC>=0.98)	n/a (DC>=0.98)

Note:
- DC is Duty Cycle.
- DCF is Duty Cycle Factor.

1.1.5 EUT Operational Condition

EUT Power Type	From host system			
Beamforming Function	☒	With beamforming	☐	Without beamforming
	The product has beamforming function for 11n/VHT/11ax in 2.4GHz, 11n/11ac/11ax in 5GHz and ax in 6GHz.			
Weather Band	☒	With 5600~5650MHz	☐	Without 5600~5650MHz
Function	☐	Outdoor P2M	☐	Indoor P2M
	☐	Fixed P2P	☒	Client
	☒	Point-to-multipoint	☐	Point-to-point
TPC Function	☒	With TPC	☐	Without TPC
Test Software Version	REALTEK MP V:homo_V1.0.2			

Note: The above information was declared by manufacturer.

1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2013
- FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- FCC KDB 662911 D01 v02r01
- FCC KDB 412172 D01 v01r01
- FCC KDB 414788 D01 v01r01

1.3 Testing Location Information

Testing Location Information	
Test Lab.：Sporton International Inc. Hsinchu Laboratory	
Hsinchu (TAF: 3787)	ADD: No.8, Ln. 724, Bo’ ai St., Zhubei City, Hsinchu County 302010, Taiwan TEL: 886-3-656-9065 FAX: 886-3-656-9085 Test site Designation No. TW3787 with FCC. Conformity Assessment Body Identifier (CABID) TW3787 with ISED.

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
RF Conducted (Other Tests)	TH01-CB	Serway Lee	21~22.3 / 65~69	May 02, 2022~ Jun. 17, 2022
RF Conducted (Maximum Conducted Output Power test)	TH01-CB	Serway Lee	21~22.3 / 65~69	May 02, 2022~ Aug. 08, 2022
Radiated <Below 1GHz>	10CH01-CB	Peter Wu	23~24 / 57~58	May 18, 2022
Radiated <Above 1GHz>	03CH02-CB 03CH03-CB	Ken Yeh	23.7-24.8 / 57-60 24.1-24.2 / 55-58	Mar. 16, 2022~ Jun. 01, 2022
Radiated <Co-location>	03CH04-CB	Ken Yeh	24.4-25.5 / 55-58	Jun. 09, 2022
AC Conduction	CO01-CB	Ryan Huang	23~24 / 56~57	May 13, 2022

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Test Date: Before Jun. 01, 2022

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.4 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	4.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.5 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.2 dB	Confidence levels of 95%
Conducted Emission	2.5 dB	Confidence levels of 95%
Output Power Measurement	1.3 dB	Confidence levels of 95%
Power Density Measurement	2.5 dB	Confidence levels of 95%
Bandwidth Measurement	0.9%	Confidence levels of 95%

Test Date: After May 31, 2022

Test Items	Uncertainty	Remark
Radiated Emission (1GHz ~ 18GHz)	5.2 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.7 dB	Confidence levels of 95%
Conducted Emission	3.2 dB	Confidence levels of 95%
Output Power Measurement	0.8 dB	Confidence levels of 95%
Power Density Measurement	3.2 dB	Confidence levels of 95%
Bandwidth Measurement	2.0 %	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Channel Mode

<Full RU>
Non-Beamforming Mode:
1TX

Mode	Power Setting
802.11a_Nss1,(6Mbps)_1TX	-
5180MHz	19
5200MHz	20.25
5240MHz	20.25
5260MHz	20.25
5300MHz	20.5
5320MHz	17
5500MHz	17.75
5580MHz	19.75
5700MHz	14.25
5720MHz Straddle 5.47-5.725GHz	19.75
5720MHz Straddle 5.725-5.85GHz	19.75
5745MHz	20.5
5785MHz	20.5
5825MHz	20.75
802.11ac VHT20_Nss1,(MCS0)_1TX	-
5180MHz	17.25
5200MHz	20.75
5240MHz	20.5
5260MHz	21.25
5300MHz	20.5
5320MHz	16.75
5500MHz	17.25
5580MHz	20
5700MHz	14
5720MHz Straddle 5.47-5.725GHz	20.25
5720MHz Straddle 5.725-5.85GHz	20.25
5745MHz	20.75
5785MHz	20.75
5825MHz	21.5
802.11ac VHT40_Nss1,(MCS0)_1TX	-
5190MHz	15.5
5230MHz	19.5

Mode	Power Setting
5270MHz	18.5
5310MHz	15
5510MHz	15.75
5550MHz	17.75
5670MHz	15
5710MHz Straddle 5.47-5.725GHz	19
5710MHz Straddle 5.725-5.85GHz	19
5755MHz	18.75
5795MHz	19.5
802.11ac VHT80_Nss1,(MCS0)_1TX	-
5210MHz	14.25
5290MHz	12.75
5530MHz	14.75
5610MHz	15
5690MHz Straddle 5.47-5.725GHz	17.75
5690MHz Straddle 5.725-5.85GHz	17.75
5775MHz	16.25
802.11ac VHT160_Nss1,(MCS0)_1TX	-
5250MHz Straddle 5.15-5.25GHz	9
5250MHz Straddle 5.25-5.35GHz	9
5570MHz	10.25
802.11ax HEW20_Nss1,(MCS0)_1TX	-
5180MHz	17.25
5200MHz	20.75
5240MHz	20.5
5260MHz	21.25
5300MHz	20.5
5320MHz	16.75
5500MHz	17.25
5580MHz	20
5700MHz	14
5720MHz Straddle 5.47-5.725GHz	20.25
5720MHz Straddle 5.725-5.85GHz	20.25
5745MHz	20.75
5785MHz	20.75
5825MHz	21.5
802.11ax HEW40_Nss1,(MCS0)_1TX	-
5190MHz	15.5
5230MHz	19.5
5270MHz	18.5

Mode	Power Setting
5310MHz	15
5510MHz	15.75
5550MHz	17.75
5670MHz	15
5710MHz Straddle 5.47-5.725GHz	19
5710MHz Straddle 5.725-5.85GHz	19
5755MHz	18.75
5795MHz	19.5
802.11ax HEW80_Nss1,(MCS0)_1TX	-
5210MHz	14.25
5290MHz	12.75
5530MHz	14.75
5610MHz	15
5690MHz Straddle 5.47-5.725GHz	17.75
5690MHz Straddle 5.725-5.85GHz	17.75
5775MHz	16.25
802.11ax HEW160_Nss1,(MCS0)_1TX	-
5250MHz Straddle 5.15-5.25GHz	9
5250MHz Straddle 5.25-5.35GHz	9
5570MHz	10.25

2TX

Mode	Power Setting
802.11a_Nss1,(6Mbps)_2TX	-
5180MHz	17 (S0-1.5)
5200MHz	16.75 (S0-1.5)
5240MHz	16.5 (S0-1)
5260MHz	17 (S0-1)
5300MHz	16.75 (S0-1)
5320MHz	16.5 (S0-1)
5500MHz	16.5 (S0-1)
5580MHz	16.25 (S0-1)
5700MHz	14.5 (S0-1)
5720MHz Straddle 5.47-5.725GHz	16 (S0-1.25)
5720MHz Straddle 5.725-5.85GHz	16 (S0-1.25)
5745MHz	20.5 (S1-1)
5785MHz	20 (S0-1.25)
5825MHz	20.5 (S1-0.25)
802.11ac VHT20_Nss1,(MCS0)_2TX	-
5180MHz	17.25 (S0-1.5)
5200MHz	17.25 (S0-1.5)
5240MHz	17.25 (S0-1)
5260MHz	17.5 (S0-1.25)
5300MHz	17 (S0-1)
5320MHz	17 (S0-1)
5500MHz	16 (S0-1)
5580MHz	16.75 (S0-1)
5700MHz	13(S0-1)
5720MHz Straddle 5.47-5.725GHz	16.5 (S0-1.25)
5720MHz Straddle 5.725-5.85GHz	16.5 (S0-1.25)
5745MHz	20 (S0-1.5)
5785MHz	20.5 (S0-1.5)
5825MHz	20.5
802.11ac VHT40_Nss1,(MCS0)_2TX	-
5190MHz	15.25(S0-1.5)
5230MHz	20(S0-1)
5270MHz	20.25
5310MHz	14.5(S0-0.5)
5510MHz	14.75 (S0-0.75)
5550MHz	21 (S1-1.5)
5670MHz	14.5(S0-1)

Mode	Power Setting
5710MHz Straddle 5.47-5.725GHz	21.5 (S1-2)
5710MHz Straddle 5.725-5.85GHz	21.5 (S1-2)
5755MHz	20(S1-1)
5795MHz	20(S0-0.5)
802.11ac VHT80_Nss1,(MCS0)_2TX	-
5210MHz	13.25 (S0-1.25)
5290MHz	11 (S0-1)
5530MHz	13.75 (S0-1)
5610MHz	14.25(S0-1)
5690MHz Straddle 5.47-5.725GHz	16.5(S0-1.25)
5690MHz Straddle 5.725-5.85GHz	16.5(S0-1.25)
5775MHz	15.75(S0-1)
802.11ac VHT160_Nss1,(MCS0)_2TX	-
5250MHz Straddle 5.15-5.25GHz	8.75 (S0-1.25)
5250MHz Straddle 5.25-5.35GHz	8.75 (S0-1.25)
5570MHz	9.5 (S0-1)
802.11ax HEW20_Nss1,(MCS0)_2TX	-
5180MHz	17.25 (S0-1.5)
5200MHz	17.25 (S0-1.5)
5240MHz	17.25 (S0-1)
5260MHz	17.5 (S0-1.25)
5300MHz	17 (S0-1)
5320MHz	17 (S0-1)
5500MHz	16 (S0-1)
5580MHz	16.75 (S0-1)
5700MHz	13(S0-1)
5720MHz Straddle 5.47-5.725GHz	16.5 (S0-1.25)
5720MHz Straddle 5.725-5.85GHz	16.5 (S0-1.25)
5745MHz	20 (S0-1.5)
5785MHz	20.5 (S0-1.5)
5825MHz	20.5
802.11ax HEW40_Nss1,(MCS0)_2TX	-
5190MHz	15.25(S0-1.5)
5230MHz	20(S0-1)
5270MHz	20.25
5310MHz	14.5(S0-0.5)
5510MHz	14.75 (S0-0.75)
5550MHz	21 (S1-1.5)
5670MHz	14.5(S0-1)
5710MHz Straddle 5.47-5.725GHz	21.5 (S1-2)

Mode	Power Setting
5710MHz Straddle 5.725-5.85GHz	21.5 (S1-2)
5755MHz	20(S1-1)
5795MHz	20(S0-0.5)
802.11ax HEW80_Nss1,(MCS0)_2TX	-
5210MHz	13.25 (S0-1.25)
5290MHz	11 (S0-1)
5530MHz	13.75 (S0-1)
5610MHz	14.25(S0-1)
5690MHz Straddle 5.47-5.725GHz	16.5(S0-1.25)
5690MHz Straddle 5.725-5.85GHz	16.5(S0-1.25)
5775MHz	15.75(S0-1)
802.11ax HEW160_Nss1,(MCS0)_2TX	-
5250MHz Straddle 5.15-5.25GHz	8.75 (S0-1.25)
5250MHz Straddle 5.25-5.35GHz	8.75 (S0-1.25)
5570MHz	9.5 (S0-1)

Beamforming Mode:
2TX

Mode	Power Setting
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-
5180MHz	17.25 (S0-1.5)
5200MHz	17 (S0-1.5)
5240MHz	17 (S0-1)
5260MHz	17.25 (S0-1.25)
5300MHz	16.75 (S0-1)
5320MHz	16.5 (S0-1)
5500MHz	16 (S0-1)
5580MHz	16.25 (S0-1)
5700MHz	13(S0-1)
5720MHz Straddle 5.47-5.725GHz	16.5 (S0-1.25)
5720MHz Straddle 5.725-5.85GHz	16.5 (S0-1.25)
5745MHz	17.25 (S0-1.5)
5785MHz	17.25 (S0-1.5)
5825MHz	17.5 (S0-1.25)
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-
5190MHz	15.25(S0-1.5)
5230MHz	17(S0-1)
5270MHz	17(S0-1.25)
5310MHz	14.5(S0-0.5)
5510MHz	14.75 (S0-0.75)
5550MHz	17.25 (S1-1.5)
5670MHz	14.5(S0-1)
5710MHz Straddle 5.47-5.725GHz	16(S0-1.5)
5710MHz Straddle 5.725-5.85GHz	16(S0-1.5)
5755MHz	17(S1-1)
5795MHz	17(S0-0.5)
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-
5210MHz	13.25 (S0-1.25)
5290MHz	11 (S0-1)
5530MHz	13.75 (S0-1)
5610MHz	14.25(S0-1)
5690MHz Straddle 5.47-5.725GHz	15.5(S0-1.25)
5690MHz Straddle 5.725-5.85GHz	15.5(S0-1.25)
5775MHz	15.75(S0-1)
802.11ac VHT160-BF_Nss1,(MCS0)_2TX	-
5250MHz Straddle 5.15-5.25GHz	8.75 (S0-1.25)

Mode	Power Setting
5250MHz Straddle 5.25-5.35GHz	8.75 (S0-1.25)
5570MHz	9.5 (S0-1)
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-
5180MHz	17.25 (S0-1.5)
5200MHz	17 (S0-1.5)
5240MHz	17 (S0-1)
5260MHz	17.25 (S0-1.25)
5300MHz	16.75 (S0-1)
5320MHz	16.5 (S0-1)
5500MHz	16 (S0-1)
5580MHz	16.25 (S0-1)
5700MHz	13(S0-1)
5720MHz Straddle 5.47-5.725GHz	16.5 (S0-1.25)
5720MHz Straddle 5.725-5.85GHz	16.5 (S0-1.25)
5745MHz	17.25 (S0-1.5)
5785MHz	17.25 (S0-1.5)
5825MHz	17.5 (S0-1.25)
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-
5190MHz	15.25(S0-1.5)
5230MHz	17(S0-1)
5270MHz	17(S0-1.25)
5310MHz	14.5(S0-0.5)
5510MHz	14.75 (S0-0.75)
5550MHz	17.25 (S1-1.5)
5670MHz	14.5(S0-1)
5710MHz Straddle 5.47-5.725GHz	16(S0-1.5)
5710MHz Straddle 5.725-5.85GHz	16(S0-1.5)
5755MHz	17(S1-1)
5795MHz	17(S0-0.5)
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	-
5210MHz	13.25 (S0-1.25)
5290MHz	11 (S0-1)
5530MHz	13.75 (S0-1)
5610MHz	14.25(S0-1)
5690MHz Straddle 5.47-5.725GHz	15.5(S0-1.25)
5690MHz Straddle 5.725-5.85GHz	15.5(S0-1.25)
5775MHz	15.75(S0-1)
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	-
5250MHz Straddle 5.15-5.25GHz	8.75 (S0-1.25)
5250MHz Straddle 5.25-5.35GHz	8.75 (S0-1.25)

Mode	Power Setting
5570MHz	9.5 (S0-1)

<Partial RU>
RU 26
1TX

Mode	Power Setting
802.11ax HEW20_Nss1,(MCS0)_1TX	-
5180MHz	16.25
5200MHz	16
5240MHz	16.25
5260MHz	16.25
5300MHz	16.25
5320MHz	16.25
5500MHz	16.25
5580MHz	16
5700MHz	13.75
5720MHz Straddle 5.47-5.725GHz	15.75
5720MHz Straddle 5.725-5.85GHz	15.75
5745MHz	19
5785MHz	18
5825MHz	18

2TX

Mode	Power Setting
802.11ax HEW20_Nss1,(MCS0)_2TX	-
5180MHz	12.5 (S0-1.5)
5200MHz	12.5 (S0-1.25)
5240MHz	12.25 (S0-0.75)
5260MHz	12.25 (S0-1)
5300MHz	11.5 (S0-0.25)
5320MHz	11.5 (S0-0.25)
5500MHz	11.75 (S0-0.75)
5580MHz	11.75 (S0-1.25)
5700MHz	11.25 (S0-1.25)
5720MHz Straddle 5.47-5.725GHz	11.5 (S0-1.25)
5720MHz Straddle 5.725-5.85GHz	11.5 (S0-1.25)
5745MHz	19.25 (S0-1)
5785MHz	18.25 (S0-1)
5825MHz	18 (S0-1)

RU 52
1TX

Mode	Power Setting
802.11ax HEW20_Nss1,(MCS0)_1TX	-
5180MHz	17.75
5200MHz	17.75
5240MHz	18
5260MHz	17.75
5300MHz	17.75
5320MHz	17.75
5500MHz	17.75
5580MHz	17.5
5700MHz	15.5
5720MHz Straddle 5.47-5.725GHz	17.5
5720MHz Straddle 5.725-5.85GHz	17.5
5745MHz	20.5
5785MHz	19
5825MHz	19.25

2TX

Mode	Power Setting
802.11ax HEW20_Nss1,(MCS0)_2TX	-
5180MHz	14.5 (S0-1.5)
5200MHz	14.5 (S0-1.5)
5240MHz	14.5 (S0-1.5)
5260MHz	14.25 (S0-1)
5300MHz	14 (S0-1)
5320MHz	13.75 (S0-1)
5500MHz	13.75 (S0-1)
5580MHz	13.5 (S0-1)
5700MHz	12 (S0-1)
5720MHz Straddle 5.47-5.725GHz	13.25 (S0-1.5)
5720MHz Straddle 5.725-5.85GHz	13.25 (S0-1.5)
5745MHz	21 (S0-1.25)
5785MHz	21 (S0-1.25)
5825MHz	21

RU 106
1TX

Mode	Power Setting
802.11ax HEW20_Nss1,(MCS0)_1TX	-
5180MHz	18
5200MHz	17
5240MHz	18
5260MHz	18
5300MHz	18
5320MHz	17.75
5500MHz	17.75
5580MHz	17.75
5700MHz	16
5720MHz Straddle 5.47-5.725GHz	17.5
5720MHz Straddle 5.725-5.85GHz	17.5
5745MHz	21.5
5785MHz	19.75
5825MHz	21.5

2TX

Mode	Power Setting
802.11ax HEW20_Nss1,(MCS0)_2TX	-
5180MHz	14.75 (S0-1.5)
5200MHz	14.5 (S0-1.25)
5240MHz	14.5 (S0-1.25)
5260MHz	14.5 (S0-1.25)
5300MHz	14 (S0-1)
5320MHz	13.75 (S0-0.75)
5500MHz	13.75 (S0-1)
5580MHz	13.75 (S0-1)
5700MHz	13 (S0-1.25)
5720MHz Straddle 5.47-5.725GHz	13.5 (S0-1.25)
5720MHz Straddle 5.725-5.85GHz	13.5 (S0-1.25)
5745MHz	20 (S0-1)
5785MHz	20 (S0-0.5)
5825MHz	21 (S1-1)

Note:
- Evaluated HEW20/HEW40/HEW80/HEW160 mode only. Due to similar modulation, The power setting of HT20/HT40/VHT20/VHT40/VHT80/VHT160 mode are the same or lower than HEW20/HEW40/HEW80/HEW160.The VHT20/VHT40/VHT80/VHT160 evaluates the output power only.
- The EUT supports non-beamforming and beamforming modes, after evaluating, the non-beamforming mode has been evaluated to be the worst case, so it was selected to test. The beamforming mode evaluates the output power only.

2.2 The Worst Case Measurement Configuration

<Full RU>

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Normal Link
1	EUT + WLAN 2.4GHz+ Bluetooth + Ant. 2
2	EUT + WLAN 5GHz+ Bluetooth + Ant. 2
3	EUT + WLAN 6GHz+ Bluetooth + Ant. 2
Mode 2 generated the worst test result, so it was recorded in this report.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Maximum Output Power
Test Condition	Conducted measurement at transmit chains
1	EUT with Ant. 2

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Power Spectral Density Unwanted Emissions
Test Condition	Conducted measurement at transmit chains
1	EUT with Ant. 1
2	EUT with Ant. 2
3	EUT with Ant. 3

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Normal Link
1	EUT in X axis + WLAN 2.4GHz + Bluetooth + Ant. 2
2	EUT in Y axis + WLAN 2.4GHz + Bluetooth + Ant. 2
3	EUT in Z axis + WLAN 2.4GHz + Bluetooth + Ant. 2
Mode 3 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4 ~ 5 will follow this same test mode.	
4	EUT in Z axis + WLAN 5GHz + Bluetooth + Ant. 2
5	EUT in Z axis + WLAN 6GHz + Bluetooth + Ant. 2
Mode 3 has been evaluated to be the worst case among Mode 1~5, thus measurement for Mode 6 ~ 7 will follow this same test mode.	
6	EUT in Z axis + WLAN 2.4GHz + Bluetooth + Ant. 3
7	EUT in Z axis + WLAN 2.4GHz + Bluetooth + Ant. 1
For operating mode 3 is the worst case and it was record in this test report.	
Operating Mode > 1GHz	CTX
The EUT was performed at X axis, Y axis and Z axis position, and the worst case as below:	
1	1TX: EUT in X axis with Ant. 1
	2TX: EUT in X axis with Ant. 1
2	1TX: EUT with Ant. 2 (Bandedge at Z axis / Harmonic at X axis)
	2TX: EUT in X axis with Ant. 2
3	1TX: EUT in X axis with Ant. 3
	2TX: EUT in Y axis with Ant. 3

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	Normal Link
The EUT was performed at X axis, Y axis and Z axis position. EUT X axis in 5GHz + Bluetooth and EUT Y axis in 6GHz + Bluetooth were been evaluated to be the worst case at Radiated measurement <Above 1GHz>; thus, the measurement will follow this same test configuration	
1	EUT in X with Ant. 1 (Port 1)_WLAN 5GHz + Bluetooth
2	EUT in Y with Ant. 1 (Port 1)_WLAN 6GHz + Bluetooth
3	EUT in X with Ant. 2 (Port 1)_WLAN 5GHz + Bluetooth
4	EUT in Y with Ant. 2 (Port 1)_WLAN 6GHz + Bluetooth
5	EUT in X with Ant. 3 (Port 1)_WLAN 5GHz + Bluetooth
6	EUT in Y with Ant. 3 (Port 1)_WLAN 6GHz + Bluetooth
For operating mode 5 is the worst case and it was record in this test report.	
Refer to Appendix F for Radiated Emission Co-location.	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Operating Mode	
1	Bluetooth + WLAN 5GHz : 2TX
2	Bluetooth + WLAN 6GHz : 2TX
3	WLAN 2.4GHz: 1TX + WLAN 5GHz : 1TX
4	WLAN 2.4GHz: 1TX + WLAN 6GHz : 1TX
5	Bluetooth + WLAN 5GHz : 1TX + WLAN 6GHz : 1TX
Refer to Sporton Test Report No.: FA1N0223-06 for Co-location RF Exposure Evaluation.	

<Partial RU>

The Worst Case Mode for Following Conformance Tests	
Tests Item	Maximum Output Power
Test Condition	Conducted measurement at transmit chains
1	EUT with Ant. 2

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Power Spectral Density Unwanted Emissions
Test Condition	Conducted measurement at transmit chains
1	EUT with Ant. 1
2	EUT with Ant. 2
3	EUT with Ant. 3

The Worst Case Mode for Following Conformance Tests	
Tests Item	Unwanted Emissions
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode > 1GHz	CTX
The EUT was performed at X axis, Y axis and Z axis position, and the worst case as below:	
1	1TX: EUT in X axis with Ant. 1
	2TX: EUT in X axis with Ant. 1
2	1TX: EUT with Ant. 2 (Bandedge at Z axis / Harmonic at X axis)
	2TX: EUT in X axis with Ant. 2
3	1TX: EUT in X axis with Ant. 3
	2TX: EUT in Y axis with Ant. 3

2.3 EUT Operation during Test

For CTX Mode:

The EUT was programmed to be in continuously transmitting mode.

For Normal Link Mode:

During the test, the EUT operation to normal function.

2.4 Accessories

N/A

2.5 Support Equipment

For AC Conduction and Radiated (below 1GHz):


Support Equipment				
No.	**Equipment**	**Brand Name**	**Model Name**	**FCC ID**
A	NB	DELL	PP13S	N/A
B	Earphone	SHYARO CHI	MIC-04	N/A
C	Mouse	Logitech	M-U0026	N/A
D	WIFI AP	ASUS	AX88U	N/A
E	Wireless Connectivity Tester	R&S	CMW270	N/A
F	Test fixture	REALTEK	Ameba adapter	N/A

For Radiated (above 1GHz) and RF Conducted:

Support Equipment				
No.	**Equipment**	**Brand Name**	**Model Name**	**FCC ID**
A	NB	DELL	E4300	N/A
B	Test fixture	REALTEK	Ameba adapter	N/A


2.6 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission Test

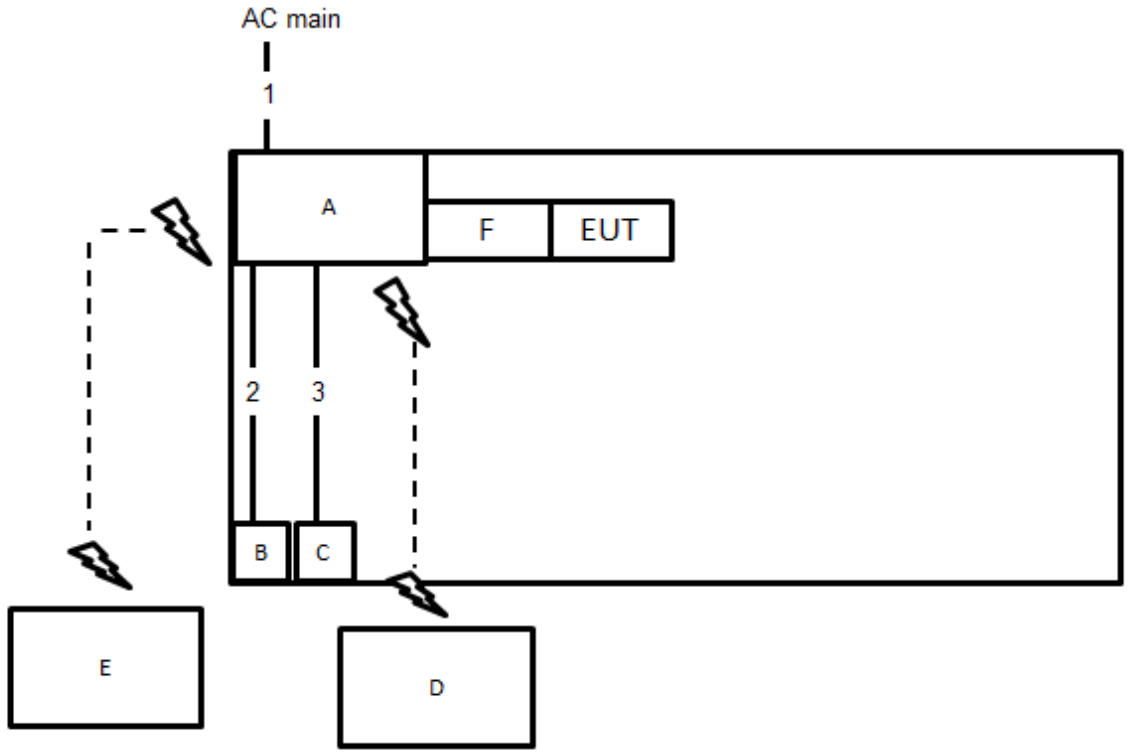


Item	Connection	Shielded	Length
1	Power cable	No	3.1m
2	Audio cable	No	1.1m
3	USB cable	Yes	1.8m

Test Setup Diagram - Radiated Test < 1GHz

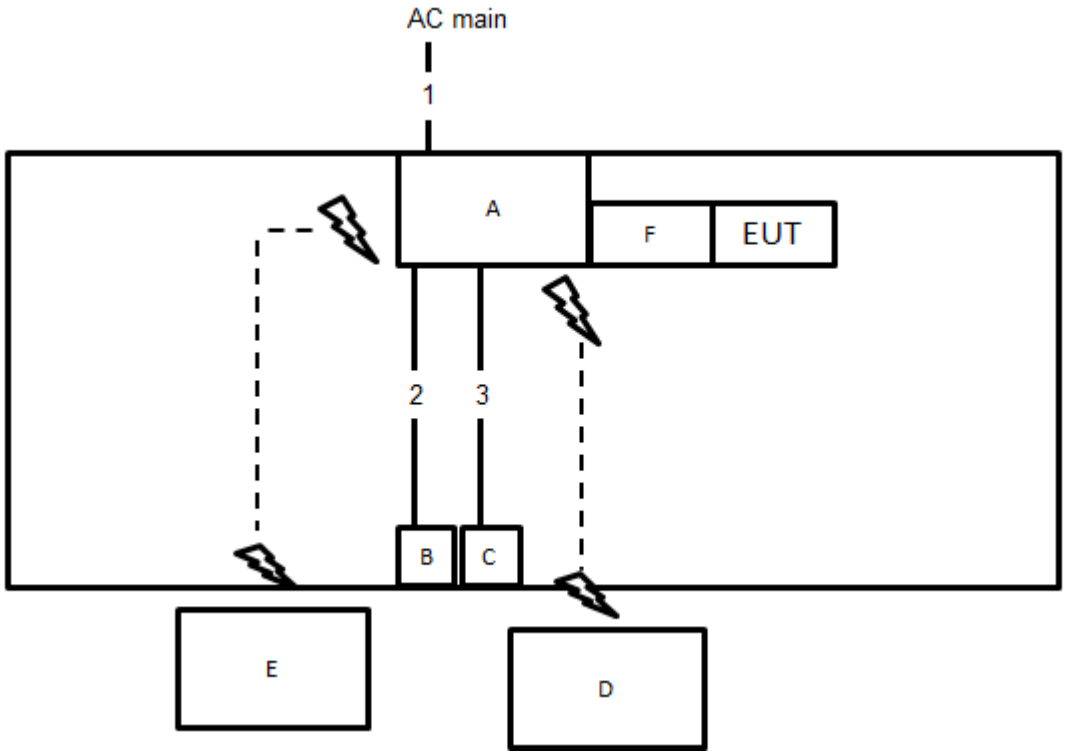

Item	Connection	Shielded	Length
1	Power cable	No	3.1m
2	Audio cable	No	1.1m
3	USB cable	Yes	1.8m

Test Setup Diagram - Radiated Test > 1GHz

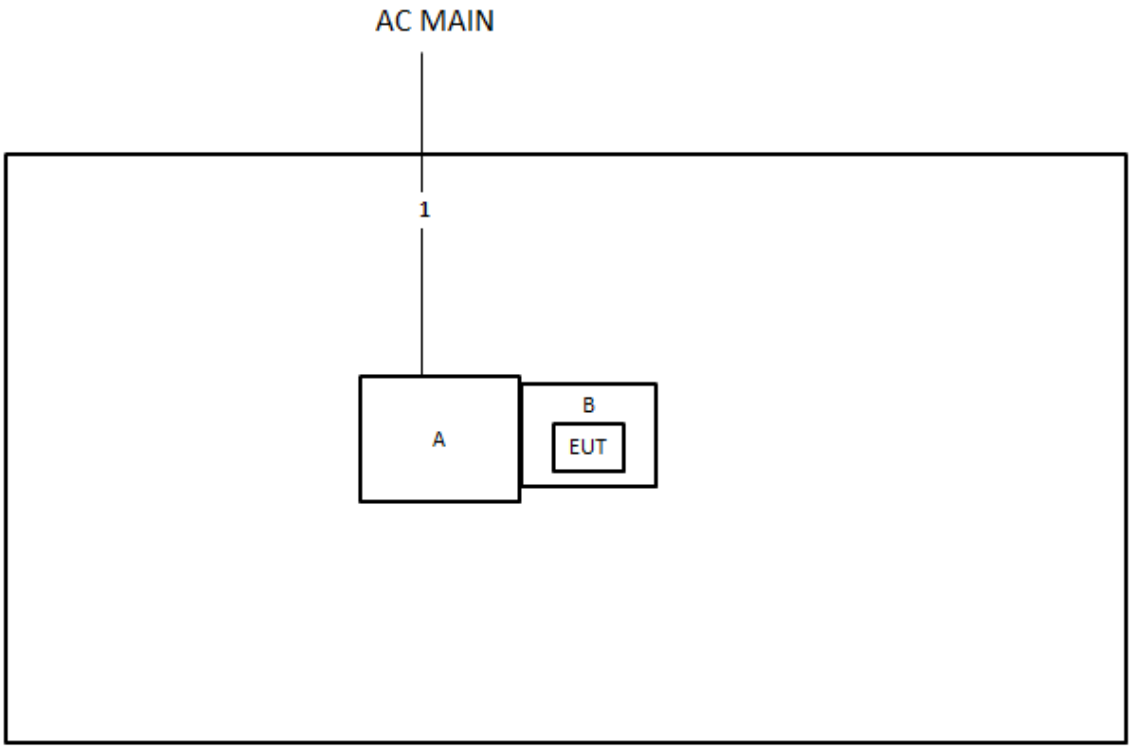

Item	Connection	Shielded	Length
1	Power cable	No	1.5m

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	**Quasi-Peak**	**Average**
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

AC Power-line Conducted Emissions

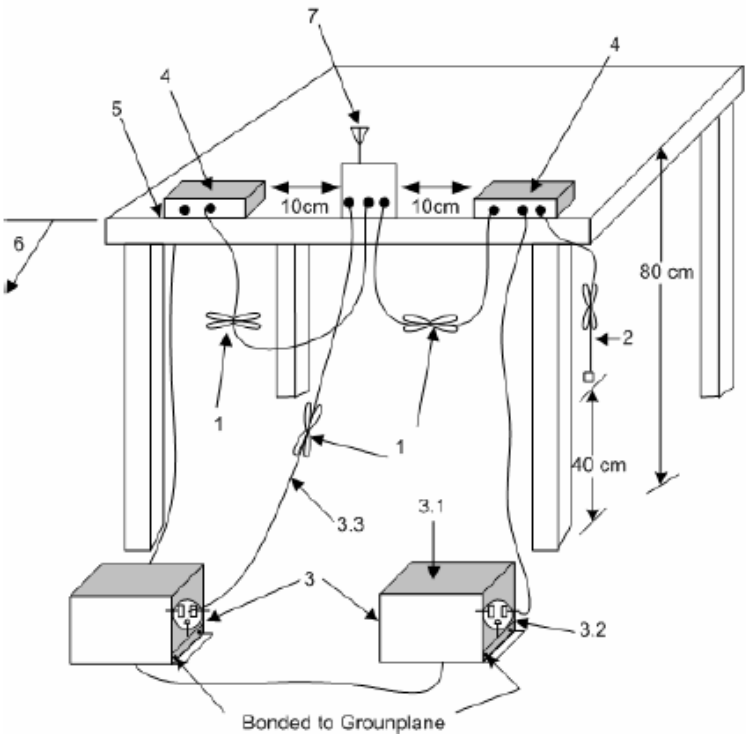

1—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.
2—The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
3—EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN may be placed on top of, or immediately beneath, reference ground plane.
3.1—All other equipment powered from additional LISN(s).
3.2—A multiple-outlet strip may be used for multiple power cords of non-EUT equipment.
3.3—LISN at least 80 cm from nearest part of EUT chassis.
4—Non-EUT components of EUT system being tested.
5—Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop.
6—Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.
7—Antenna can be integral or detachable. If detachable, then the antenna shall be attached for this test.

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level

b. Margin = -Limit + Level

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band, N/A
☒	For the 5.25-5.35 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.47-5.725 GHz band, the maximum conducted output power shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz.
☒	For the 5.725-5.85 GHz band, 26 dB emission bandwidth ,N/A. 6 dB emission bandwidth ≥ 500kHz.
☐	For the 5.85-5.895 GHz band, 26 dB emission bandwidth ,N/A. 6 dB emission bandwidth ≥ 500kHz.
LE-LAN Devices	
☐	For the band 5.15-5.25 GHz, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.725-5.85 GHz band, 6 dB emission bandwidth ≥ 500kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method		
▪	For the emission bandwidth shall be measured using one of the options below:	
	☒	Refer as FCC KDB 789033 D02, clause C for EBW and clause D for OBW measurement.
	☐	Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
	☐	Refer as IC RSS-Gen, clause 4.6 for bandwidth testing.

3.2.4 Test Setup

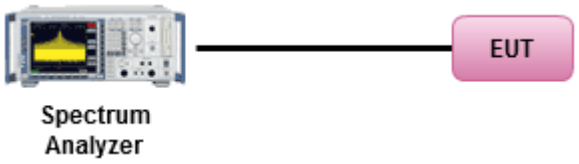Emission Bandwidth


3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Output Power

3.3.1 Limit

Maximum Output Power Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band:
	▪ Outdoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If G_{TX} > 6 dBi, then P_{Out} = 30 – (G_{TX} – 6). e.i.r.p. at any elevation angle above 30 degrees ≤ 125mW [21dBm]
	▪ Indoor AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If G_{TX} > 6 dBi, then P_{Out} = 30 – (G_{TX} – 6)
	▪ Point-to-point AP: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W If G_{TX} > 23 dBi, then P_{Out} = 30 – (G_{TX} – 23).
	▪ Mobile or Portable Client: the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW. If G_{TX} > 6 dBi, then P_{Out} = 24 – (G_{TX} – 6).
☒	For the 5.25-5.35 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If G_{TX} > 6 dBi, then P_{Out} = 24 – (G_{TX} – 6).
☒	For the 5.47-5.725 GHz band, the maximum conducted output power (P_{Out}) shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in MHz. If G_{TX} > 6 dBi, then P_{Out} = 24 – (G_{TX} – 6).
☒	For the 5.725-5.85 GHz band:
	▪ Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If G_{TX} > 6 dBi, then P_{Out} = 30 – (G_{TX} – 6).
	▪ Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W.
Maximum EIRP Limit	
☐	For the 5.85-5.895 GHz band:
	▪ Indoor AP & subordinate device < 36 dBm
	▪ Client device < 30 dBm
LE-LAN Devices	
☐	For the 5.15-5.25 GHz band, the maximum e.i.r.p. shall not exceed 200 mW or 10 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.
☐	For the 5.25-5.35 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the maximum e.i.r.p. shall not exceed 1.0 W or 17 + 10 log B, dBm, whichever power is less. B is the 99% emission bandwidth in MHz
☐	For the 5.725-5.85 GHz band:
	▪ Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If G_{TX} > 6 dBi, then P_{Out} = 30 – (G_{TX} – 6).
	▪ Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the

	lesser of 1 W.
P_{Out} = maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	

3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
	Average over on/off periods with duty factor
	☒ Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
	☐ Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
	☒ Refer as FCC KDB 789033 D02, clause E Method PM-G (using an RF average power meter).
☒	For conducted measurement.
	▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \ldots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$
☐	For radiated measurement.
	▪ Refer as FCC KDB 789033 D02 clause II A.1.F ”Antenna-port Conducted versus Radiated Testing”
	▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	▪ Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.3.4 Test Setup

For straddle channel

RF Output Power (Spectrum Analyzer)



For others channel

RF Output Power (Power Meter)



3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Limit

Peak Power Spectral Density Limit	
UNII Devices	
☒	For the 5.15-5.25 GHz band:
	▪ Outdoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If G_{TX} > 6 dBi, then P_{Out} = 17 – (G_{TX} – 6).
	▪ Indoor AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If G_{TX} > 6 dBi, then P_{Out} = 17 – (G_{TX} – 6).
	▪ Point-to-point AP: the peak power spectral density (PPSD) shall not exceed the lesser of 17dBm/MHz. If G_{TX} > 23 dBi, then P_{Out} = 17 – (G_{TX} – 23).
	▪ Mobile or Portable Client: the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If G_{TX} > 6 dBi, then PPSD= 11 – (G_{TX} – 6)..
☒	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If G_{TX} > 6 dBi, then PPSD= 11 – (G_{TX} – 6).
☒	For the 5.47-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz. If G_{TX} > 6 dBi, then PPSD= 11 – (G_{TX} – 6).
☒	For the 5.725-5.85 GHz band:
	▪ Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If G_{TX} > 6 dBi, then PPSD= 30 – (G_{TX} – 6).
	▪ Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.
EIRP Power Spectral Density Limit	
☐	For the 5.85-5.895 GHz band:
	▪ Indoor AP & subordinate device < 20dBm/MHz
	▪ Client device < 14dBm/MHz
LE-LAN Devices	
☐	For the 5.15-5.25 GHz band, the e.i.r.p. peak power spectral density (PPSD) ≤ 10 dBm/MHz.
☐	For the 5.25-5.35 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.
	▪ e.i.r.p. greater than 200 mW shall comply with the following e.i.r.p. at different elevations, where θ is the angle above the local horizontal plane (of the Earth) as shown below: -13 dBW/MHz for 0° ≤ θ < 8° ; -13 − 0.716 (θ-8) dBW/MHz for 8° ≤ θ < 40° -35.9 − 1.22 (θ-40) dBW/MHz for 40° ≤ θ ≤ 45° ; -42 dBW/MHz for θ > 45°
☐	For the 5.47-5.6 GHz band and 5.65-5.725 GHz band, the peak power spectral density (PPSD) ≤ 11 dBm/MHz.
☐	For the 5.725-5.85 GHz band:
	▪ Point-to-multipoint systems (P2M): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz. If G_{TX} > 6 dBi, then PPSD= 30 – (G_{TX} – 6).
	▪ Point-to-point systems (P2P): the peak power spectral density (PPSD) ≤ 30 dBm/500kHz.

PPSD = peak power spectral density that he same method as used to determine the conducted output power shall be used to determine the power spectral density. And power spectral density in dBm/MHz G_{TX} = the maximum transmitting antenna directional gain in dBi.

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method		
▪ Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:		
	☐	Refer as FCC KDB 789033 D02, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
	[duty cycle ≥ 98% or external video / power trigger]	
	☒	Refer as FCC KDB 789033 D02, clause E Method SA-1 (spectral trace averaging).
	☐	Refer as FCC KDB 789033 D02, clause E Method SA-1 Alt. (RMS detection with slow sweep speed)
	duty cycle < 98% and average over on/off periods with duty factor	
	☒	Refer as FCC KDB 789033 D02, clause E Method SA-2 (spectral trace averaging).
	☐	Refer as FCC KDB 789033 D02, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☒	For conducted measurement.	
	▪	If the EUT supports multiple transmit chains using options given below:
		☒ Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
		☐ Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
		☐ Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
	▪	If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \ldots + PPSD_n$

Test Method		
		(calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$
☐	For radiated measurement.	
	▪	Refer as FCC KDB 789033 D02 clause II A.1.F ”Antenna-port Conducted versus Radiated Testing”
	▪	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	▪	Refer as FCC KDB 412172 D01 clause 2.2 for EIRP calculation.

3.4.4 Test Setup

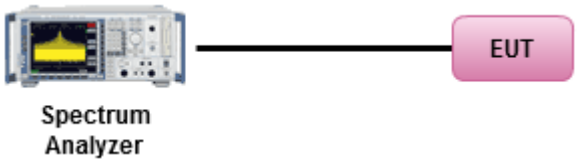Conducted Measurement


3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	**Field Strength (uV/m)**	**Field Strength (dBuV/m)**	**Measure Distance (m)**
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

Un-restricted band emissions above 1GHz Limit	
Operating Band	**Limit**
☒ 5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
☒ 5.725 - 5.85 GHz	all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
☐ 5.85 - 5.895 GHz	(i) For an indoor access point or subordinate device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of - 7 dBm/MHz at or above 5.925 GHz. (ii) For a client device, all emissions at or above 5.895 GHz shall not exceed an

	e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz. (iii) For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/ MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.
Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	

3.5.2 Measuring Instruments



Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures


Test Method			
▪ Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).			
▪ The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].			
▪ For the transmitter unwanted emissions shall be measured using following options below:			
	▪ Refer as FCC KDB 789033 D02, clause G)2) for unwanted emissions into non-restricted bands.		
	▪ Refer as FCC KDB 789033 D02, clause G)1) for unwanted emissions into restricted bands.		
		☐ Refer as FCC KDB 789033 D02, G)6) Method AD (Trace Averaging).	
		☒ Refer as FCC KDB 789033 D02, G)6) Method VB (Reduced VBW).	
		☐ Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW ≥ 1/T, where T is pulse time.	
		☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.	
		☒ Refer as FCC KDB 789033 D02, clause G)5) measurement procedure peak limit.	
		☐ Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak limit.	
▪ For radiated measurement.			
	▪ Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.		
	▪ Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.		
	▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.		
▪ The any unwanted emissions level shall not exceed the fundamental emission level.			

Test Method
▪ All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.5.4 Test Setup

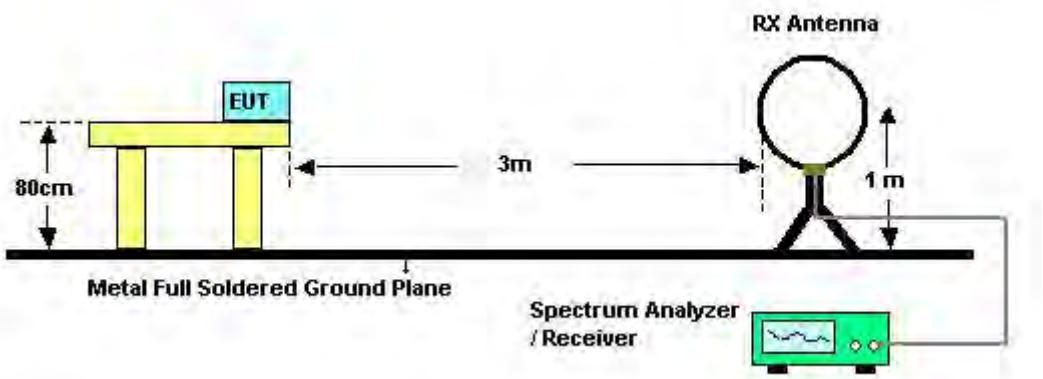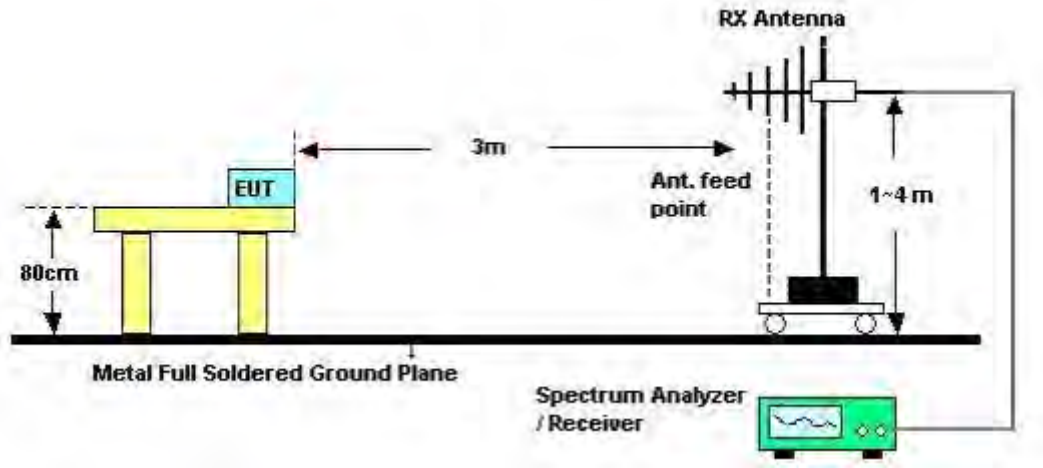Radiated - Emissions in Restricted Frequency Bands
9kHz ~30MHz

30MHz~1GHz

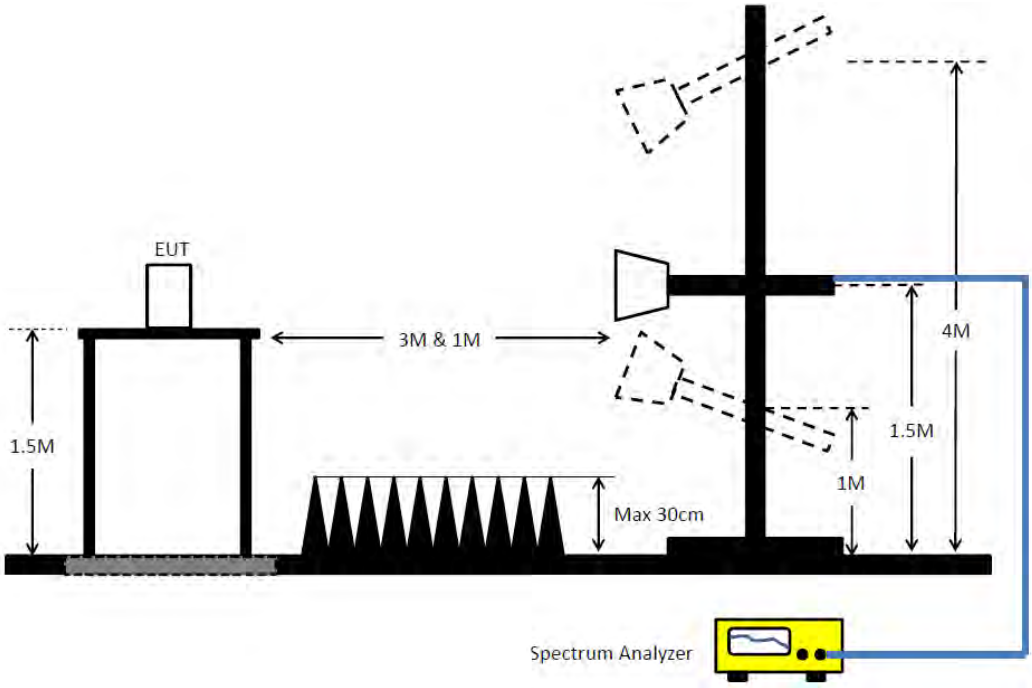
Above 1GHz



3.5.5 Measurement Results Calculation

The measured Level is calculated using:
Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.
The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10th harmonic or 40 GHz, whichever is appropriate.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Feb. 22, 2022	Feb. 21, 2023	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Feb. 09, 2022	Feb. 08, 2023	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Apr. 12, 2022	Apr. 11, 2023	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Feb. 10, 2022	Feb. 09, 2023	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	May 19, 2021	May 18, 2022	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	31244	9kHz - 30 MHz	Mar. 18, 2022	Mar. 17, 2023	Radiation (10CH01-CB)
10m Semi Anechoic Chamber NSA	TDK	SAC-10M	10CH01-CB	30MHz~1GHz 10m,3m	Jan. 27, 2022	Jan. 26, 2023	Radiation (10CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10783	9kHz ~ 1.3GHz	Mar. 11, 2022	Mar. 10, 2023	Radiation (10CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10784	9kHz ~ 1.3GHz	Mar. 11, 2022	Mar. 10, 2023	Radiation (10CH01-CB)
Low Cable	Woken	SUCOFLEX 104	low cable-01	25MHz ~ 1GHz	Oct. 19, 2021	Oct. 18, 2022	Radiation (10CH01-CB)
High Cable	Woken	SUCOFLEX 104	low cable-02	25MHz ~ 1GHz	Oct. 19, 2021	Oct. 18, 2022	Radiation (10CH01-CB)
Bilog Antenna with 6dB Attenuator	Chase & EMCI	CBL6111A &N-6-06	1543 &AT-N0609	30MHz ~ 1GHz	Jul. 01, 2021	Jun. 30, 2022	Radiation (10CH01-CB)
EMI Test Receiver	Rohde&Schwarz	ESCI	100186	9kHz ~ 3GHz	Jul. 12, 2021	Jul. 11, 2022	Radiation (10CH01-CB)
Spectrum Analyzer	Rohde&Schwarz	FSV30	101026	9kHz ~ 30GHz	Apr. 22, 2022	Apr. 21, 2023	Radiation (10CH01-CB)
Signal Analyzer	R&S	FSV40	101904	9kHz ~ 40GHz	Apr. 26, 2022	Apr. 25, 2023	Radiation (10CH01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (10CH01-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz 3m	Mar. 27, 2021	Mar. 26, 2022	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	RIKEN	SAC-3M	03CH02-CB	1GHz ~18GHz	Mar. 26, 2022	Mar. 25, 2023	Radiation (03CH02-CB)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1370	1GHz~18GHz	Sep. 14, 2021	Sep. 13, 2022	Radiation (03CH02-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 05, 2021	Aug. 04, 2022	Radiation (03CH02-CB)
Pre-Amplifier	Agilent	83017A	MY39501305	1GHz ~ 26.5GHz	Jul. 12, 2021	Jul. 11, 2022	Radiation (03CH02-CB)

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 13, 2021	Jul. 12, 2022	Radiation (03CH02-CB)
Spectrum analyzer	R&S	FSU	100015	9kHz~26GHz	Oct. 25, 2021	Oct. 24, 2022	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH02-CB)
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH02-CB)
High Cable	Woken	RG402	40G#4	1GHz ~ 40 GHz	Dec. 08, 2021	Dec. 07, 2022	Radiation (03CH02-CB)
High Cable	Woken	WCA0929M	40G#5	1GHz ~ 40 GHz	Dec. 08, 2021	Dec. 07, 2022	Radiation (03CH02-CB)
Test Software	Audix	E3	6.2009-10-8b	-	N.C.R.	N.C.R.	Radiation (03CH02-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 06, 2021	May 05, 2022	Radiation (03CH03-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 05, 2022	May 04, 2023	Radiation (03CH03-CB)
Horn Antenna	ETS・Lindgren	3115	6821	750MHz~18GHz	Jan. 21, 2022	Jan. 20, 2023	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 05, 2021	Aug. 04, 2022	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jul. 02, 2021	Jul. 01, 2022	Radiation (03CH03-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 13, 2021	Jul. 12, 2022	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jun. 04, 2021	Jun. 03, 2022	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-18	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-18+19	1GHz ~ 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH03-CB)
High Cable	Woken	RG402	40G#4	1GHz ~ 40 GHz	Dec. 08, 2021	Dec. 07, 2022	Radiation (03CH03-CB)
High Cable	Woken	WCA0929M	40G#5	1GHz ~ 40 GHz	Dec. 08, 2021	Dec. 07, 2022	Radiation (03CH03-CB)
Test Software	Audix	E3	6.2009-10-8b	-	N.C.R.	N.C.R.	Radiation (03CH03-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH04-CB	30 MHz ~ 1 GHz	Aug. 08, 2021	Aug. 07, 2022	Radiation (03CH04-CB)

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH04-CB	1GHz ~18GHz 3m	Feb. 24, 2022	Feb. 23, 2023	Radiation (03CH04-CB)
Horn Antenna	ETS・Lindgren	3115	00143147	750MHz~18GHz	Oct. 25, 2021	Oct. 24, 2022	Radiation (03CH04-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Aug. 05, 2021	Aug. 04, 2022	Radiation (03CH04-CB)
Pre-Amplifier	Agilent	83017A	MY53270063	0.5GHz ~ 26.5GHz	Jul. 12, 2021	Jul. 11, 2022	Radiation (03CH04-CB)
Pre-Amplifier	MITEQ	TTA1840-35-H G	1864479	18GHz ~ 40GHz	Jul. 13, 2021	Jul. 12, 2022	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Mar. 28, 2022	Mar. 27, 2023	Radiation (03CH04-CB
RF Cable-high	Woken	RG402	High Cable-21	1GHz - 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH04-CB)
RF Cable-high	Woken	RG402	High Cable-21+67	1GHz - 18GHz	Oct. 04, 2021	Oct. 03, 2022	Radiation (03CH04-CB)
High Cable	Woken	RG402	40G#4	1GHz ~ 40 GHz	Dec. 08, 2021	Dec. 07, 2022	Radiation (03CH04-CB)
High Cable	Woken	WCA0929M	40G#5	1GHz ~ 40 GHz	Dec. 08, 2021	Dec. 07, 2022	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH04-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 21, 2021	May 20, 2022	Conducted (TH01-CB)
Signal Analyzer	R&S	FSV40	101904	9kHz ~ 40GHz	Apr. 26, 2022	Apr. 25, 2023	Conducted (TH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	May 27, 2022	May 26, 2023	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-06	1 GHz – 26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-07	1 GHz –26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-08	1 GHz –26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-09	1 GHz –26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz –26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-30	1 GHz –26.5 GHz	Oct. 04, 2021	Oct. 03, 2022	Conducted (TH01-CB)
Switch	SPTCB	SP-SWI	SWI-01	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	SWI-01-P1	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	SWI-01-P2	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	SWI-01-P3	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH01-CB)

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
RF Cable-high	Woken	RG402	SWI-01-P4	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	SWI-01-P5	1 GHz –26.5 GHz	Dec. 13, 2021	Dec. 12, 2022	Conducted (TH01-CB)
Power Sensor	Agilent	E9327A	US40442088	50MHz~18GHz	Feb. 21, 2022	Feb. 20, 2023	Conducted (TH01-CB)
Power Meter	Agilent	E4416A	GB41291199	50MHz~18GHz	Feb. 21, 2022	Feb. 20, 2023	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.


NCR means Non-Calibration required.

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 2	Pass	QP	303k	49.73	60.17	-10.44	Line

Mode 2


13/05/2022

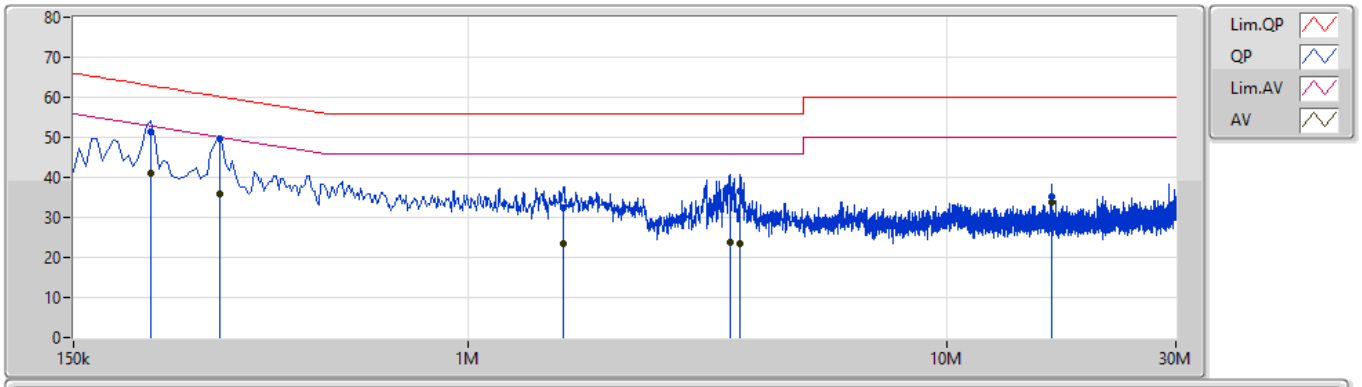

Type	Freq	Level	Limit	Margin	Factor	Condition	Comment	Raw	LISN	CL	AT			
	(Hz)	(dBuV)	(dBuV)	(dB)	(dB)			(dBuV)	(dB)	(dB)	(dB)			
QP	217.5k	51.25	62.92	-11.67	9.97	Line	-	41.28	0.06	0.02	9.89			
AV	217.5k	41.20	52.92	-11.72	9.97	Line	-	31.23	0.06	0.02	9.89			
QP	303k	49.73	60.17	-10.44	9.97	Line	"Worst"	39.76	0.06	0.02	9.89			
AV	303k	35.87	50.17	-14.30	9.97	Line	-	25.90	0.06	0.02	9.89			
QP	1.581M	32.27	56.00	-23.73	10.01	Line	-	22.26	0.08	0.04	9.89			
AV	1.581M	23.37	46.00	-22.63	10.01	Line	-	13.36	0.08	0.04	9.89			
QP	3.512M	36.85	56.00	-19.15	10.07	Line	-	26.78	0.11	0.07	9.89			
AV	3.512M	23.68	46.00	-22.32	10.07	Line	-	13.61	0.11	0.07	9.89			
QP	3.701M	36.56	56.00	-19.44	10.08	Line	-	26.48	0.12	0.07	9.89			
AV	3.701M	23.28	46.00	-22.72	10.08	Line	-	13.20	0.12	0.07	9.89			
QP	16.467M	35.01	60.00	-24.99	10.34	Line	-	24.67	0.28	0.11	9.95			
AV	16.467M	33.72	50.00	-16.28	10.34	Line	-	23.38	0.28	0.11	9.95			

Mode 2

13/05/2022

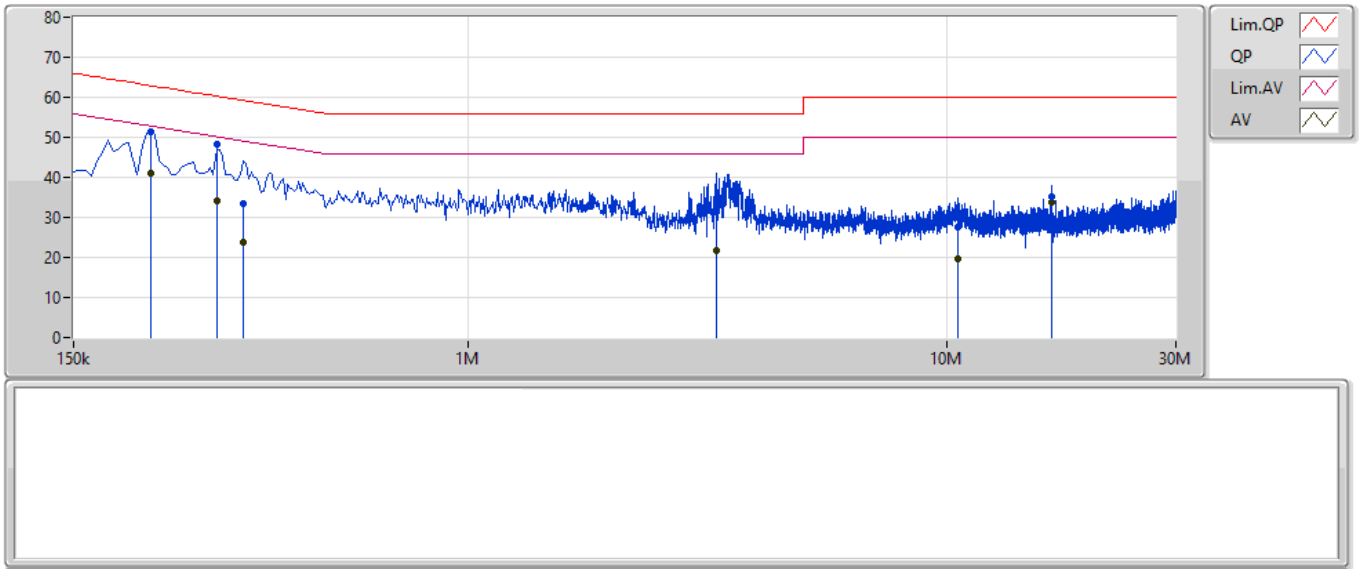

Type	Freq	Level	Limit	Margin	Factor	Condition	Comment	Raw	LISN	CL	AT
	(Hz)	(dBuV)	(dBuV)	(dB)	(dB)			(dBuV)	(dB)	(dB)	(dB)
QP	217.5k	51.31	62.92	-11.61	9.98	Neutral	"Worst"	41.33	0.07	0.02	9.89
AV	217.5k	40.99	52.92	-11.93	9.98	Neutral	-	31.01	0.07	0.02	9.89
QP	298.5k	48.18	60.28	-12.10	9.98	Neutral	-	38.20	0.07	0.02	9.89
AV	298.5k	34.28	50.28	-16.00	9.98	Neutral	-	24.30	0.07	0.02	9.89
QP	339k	33.53	59.23	-25.70	9.98	Neutral	-	23.55	0.07	0.02	9.89
AV	339k	23.75	49.23	-25.48	9.98	Neutral	-	13.77	0.07	0.02	9.89
QP	3.291M	34.54	56.00	-21.46	10.07	Neutral	-	24.47	0.12	0.06	9.89
AV	3.291M	21.71	46.00	-24.29	10.07	Neutral	-	11.64	0.12	0.06	9.89
QP	10.518M	27.42	60.00	-32.58	10.22	Neutral	-	17.20	0.24	0.07	9.91
AV	10.518M	19.73	50.00	-30.27	10.22	Neutral	-	9.51	0.24	0.07	9.91
QP	16.467M	35.03	60.00	-24.97	10.34	Neutral	-	24.69	0.28	0.11	9.95
AV	16.467M	33.76	50.00	-16.24	10.34	Neutral	-	23.42	0.28	0.11	9.95

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	34.98M	22.009M	22M0D1D	32.19M	18.441M
802.11ax HEW20_Nss1,(MCS0)_1TX	36.18M	22.069M	22M1D1D	31.47M	19.22M
802.11ax HEW40_Nss1,(MCS0)_1TX	65.04M	38.381M	38M4D1D	46.44M	37.781M
802.11ax HEW80_Nss1,(MCS0)_1TX	80.52M	77.481M	77M5D1D	80.52M	77.481M
802.11ax HEW160_Nss1,(MCS0)_1TX	81.12M	78.521M	78M5D1D	81.12M	78.521M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	32.73M	18.411M	18M4D1D	26.1M	16.522M
802.11ax HEW20_Nss1,(MCS0)_1TX	30.33M	19.07M	19M1D1D	25.74M	18.741M
802.11ax HEW40_Nss1,(MCS0)_1TX	65.82M	38.801M	38M8D1D	39.78M	37.601M
802.11ax HEW80_Nss1,(MCS0)_1TX	80.52M	77.121M	77M1D1D	80.52M	77.121M
802.11ax HEW160_Nss1,(MCS0)_1TX	80.96M	78.121M	78M1D1D	80.96M	78.121M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	31.47M	18.411M	18M4D1D	18.39M	13.508M
802.11ax HEW20_Nss1,(MCS0)_1TX	31.8M	19.16M	19M2D1D	19.395M	14.453M
802.11ax HEW40_Nss1,(MCS0)_1TX	58.08M	38.681M	38M7D1D	39.72M	33.828M
802.11ax HEW80_Nss1,(MCS0)_1TX	98.925M	77.361M	77M4D1D	80.52M	73.613M
802.11ax HEW160_Nss1,(MCS0)_1TX	162M	154.963M	155MD1D	162M	154.963M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	15.09M	19.85M	19M8D1D	3.08M	10.855M
802.11ax HEW20_Nss1,(MCS0)_1TX	15.06M	21.199M	21M2D1D	3.34M	12.234M
802.11ax HEW40_Nss1,(MCS0)_1TX	35.04M	38.381M	38M4D1D	3.9M	22.289M
802.11ax HEW80_Nss1,(MCS0)_1TX	75M	78.681M	78M7D1D	3.78M	37.201M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-
5180MHz	Pass	Inf	34.98M	22.009M
5200MHz	Pass	Inf	34.83M	21.769M
5240MHz	Pass	Inf	32.19M	18.441M
5260MHz	Pass	Inf	31.35M	18.201M
5300MHz	Pass	Inf	32.73M	18.411M
5320MHz	Pass	Inf	26.1M	16.522M
5500MHz	Pass	Inf	26.31M	16.522M
5580MHz	Pass	Inf	31.47M	18.411M
5700MHz	Pass	Inf	18.39M	16.162M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	20.37M	13.508M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.08M	10.855M
5745MHz	Pass	500k	15.06M	19.82M
5785MHz	Pass	500k	15M	19.04M
5825MHz	Pass	500k	15.09M	19.85M
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	36.18M	22.069M
5200MHz	Pass	Inf	36.09M	21.499M
5240MHz	Pass	Inf	31.47M	19.22M
5260MHz	Pass	Inf	30.33M	19.04M
5300MHz	Pass	Inf	29.94M	19.07M
5320MHz	Pass	Inf	25.74M	18.741M
5500MHz	Pass	Inf	22.68M	18.681M
5580MHz	Pass	Inf	31.8M	19.16M
5700MHz	Pass	Inf	20.07M	18.621M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	19.395M	14.453M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.34M	12.234M
5745MHz	Pass	500k	15M	20.39M
5785MHz	Pass	500k	15.03M	20M
5825MHz	Pass	500k	15.06M	21.199M
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-
5190MHz	Pass	Inf	46.44M	37.781M
5230MHz	Pass	Inf	65.04M	38.381M
5270MHz	Pass	Inf	65.82M	38.801M
5310MHz	Pass	Inf	39.78M	37.601M
5510MHz	Pass	Inf	39.72M	37.481M
5550MHz	Pass	Inf	58.08M	38.681M
5670MHz	Pass	Inf	39.78M	37.541M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	39.795M	33.828M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.9M	22.289M
5755MHz	Pass	500k	35.04M	38.381M
5795MHz	Pass	500k	31.26M	38.381M
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-
5210MHz	Pass	Inf	80.52M	77.481M
5290MHz	Pass	Inf	80.52M	77.121M
5530MHz	Pass	Inf	80.52M	77.361M
5610MHz	Pass	Inf	80.52M	77.241M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	98.925M	73.613M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	3.78M	37.201M
5775MHz	Pass	500k	75M	78.681M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	81.12M	78.521M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	80.96M	78.121M
5570MHz	Pass	Inf	162M	154.963M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11a_Nss1,(6Mbps)_1TX EBW


5180MHz

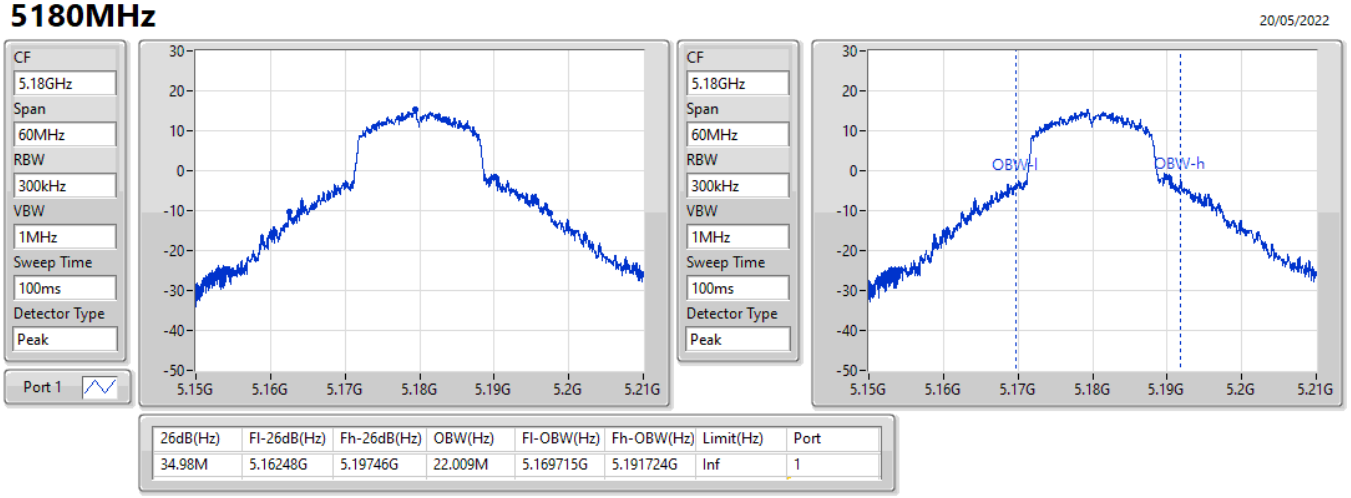

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
34.98M	5.16248G	5.19746G	22.009M	5.169715G	5.191724G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW


5200MHz

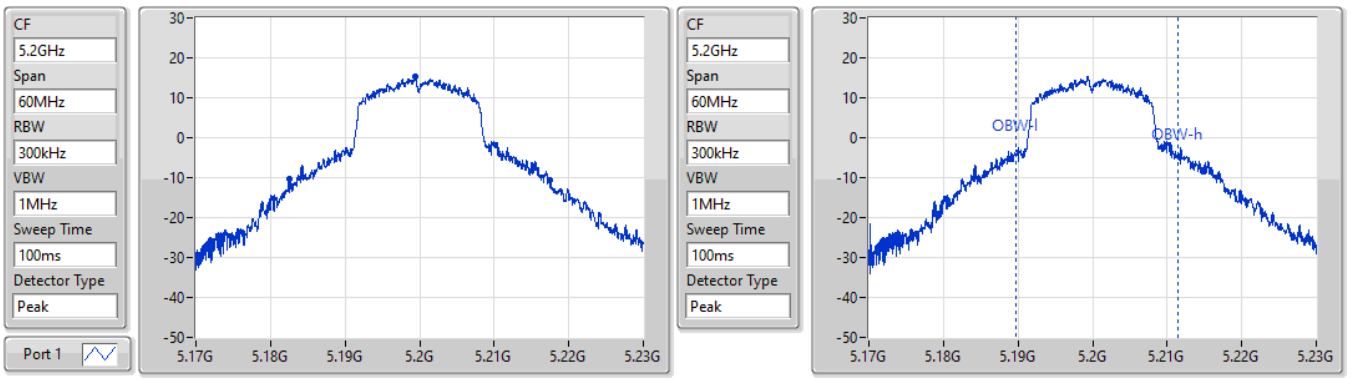

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
34.83M	5.18257G	5.2174G	21.769M	5.189715G	5.211484G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW


5240MHz

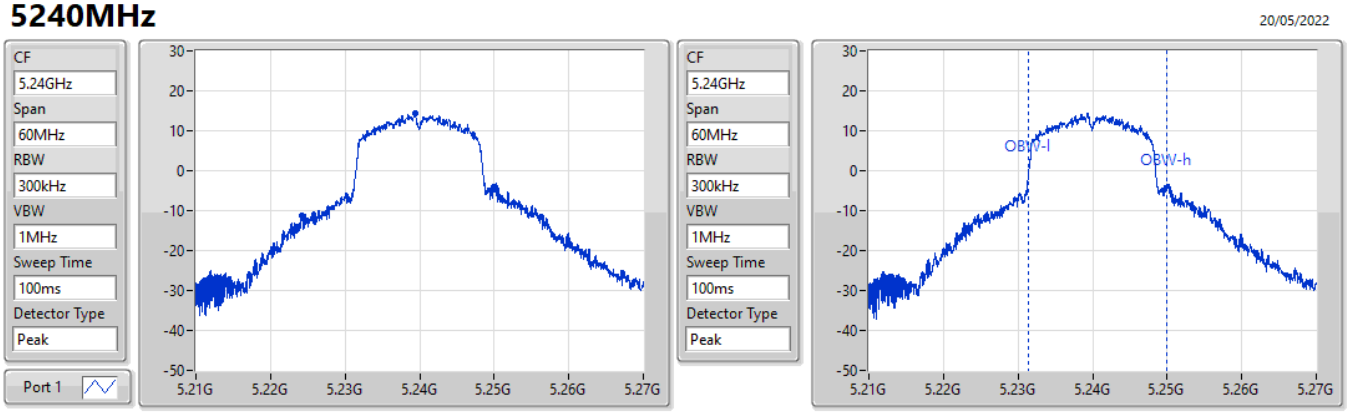

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
32.19M	5.22413G	5.25632G	18.441M	5.231454G	5.249895G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5260MHz

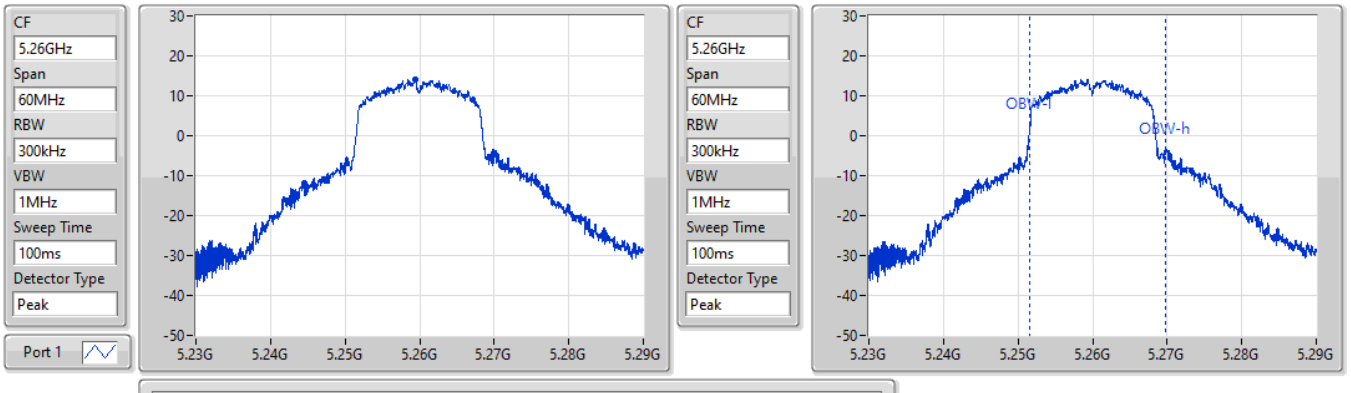


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.35M	5.24452G	5.27587G	18.201M	5.251544G	5.269745G	Inf	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5300MHz

20/05/2022

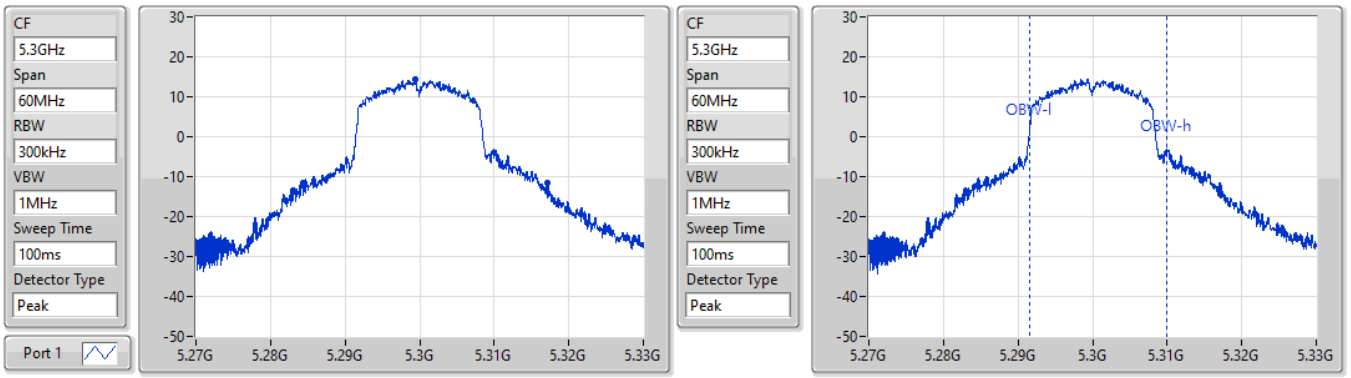


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
32.73M	5.2844G	5.31713G	18.411M	5.291514G	5.309925G	Inf	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5320MHz


20/05/2022

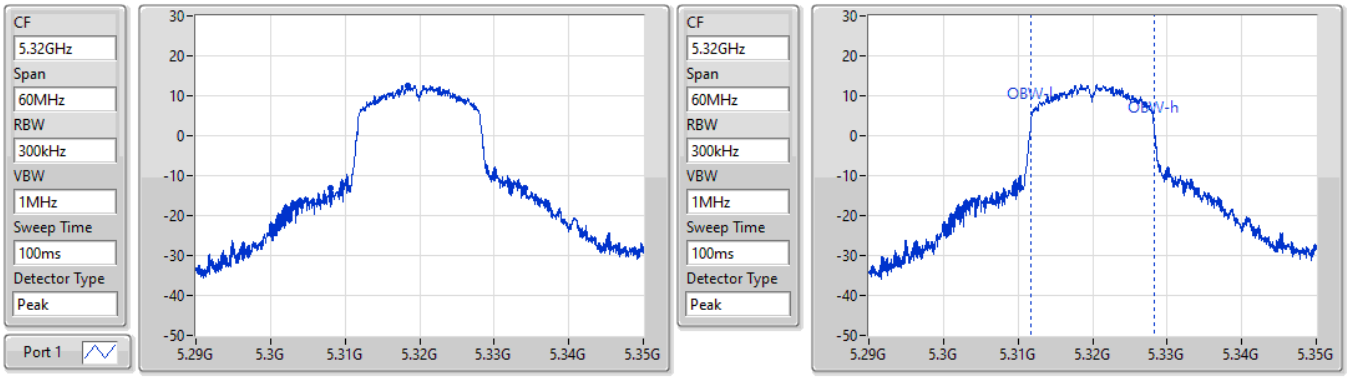

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
26.1M	5.30809G	5.33419G	16.522M	5.311784G	5.328306G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW


5500MHz

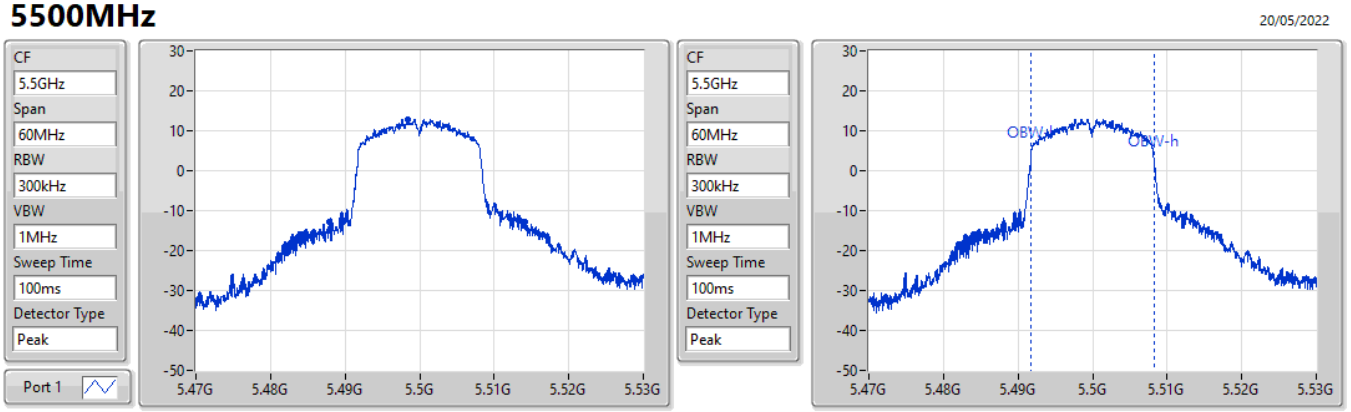

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
26.31M	5.48788G	5.51419G	16.522M	5.491784G	5.508306G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW


5580MHz

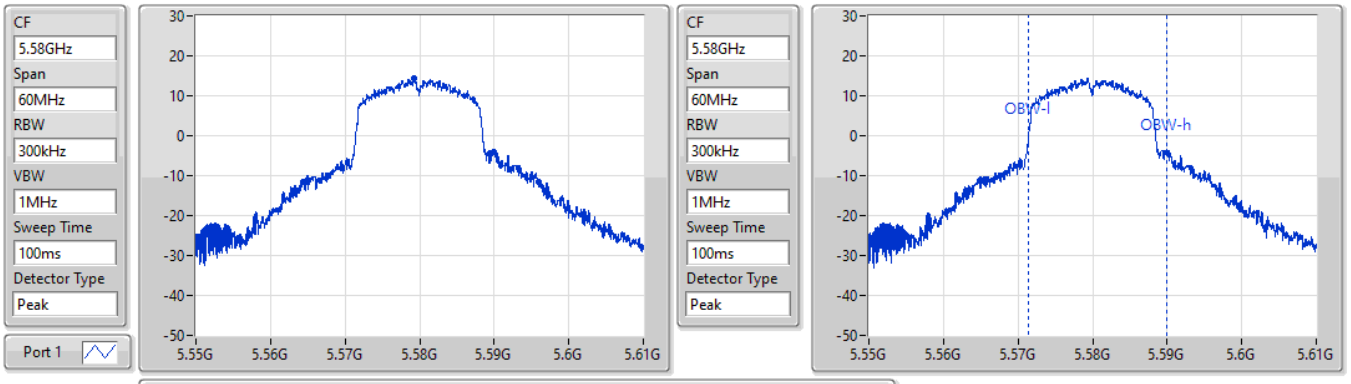

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.47M	5.56443G	5.5959G	18.411M	5.571454G	5.589865G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW


5700MHz

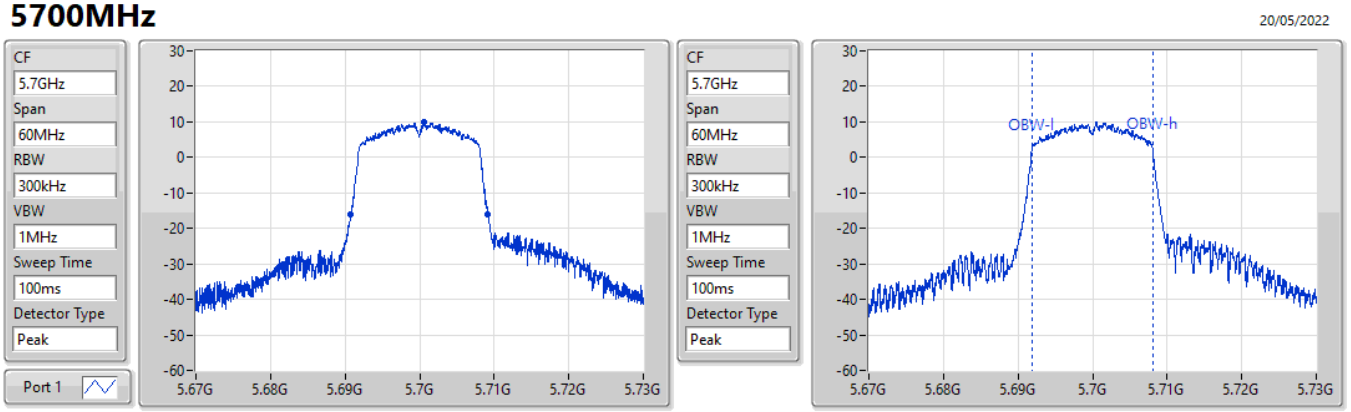

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.39M	5.69079G	5.70918G	16.162M	5.691874G	5.708036G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5720MHz Straddle 5.47-5.725GHz

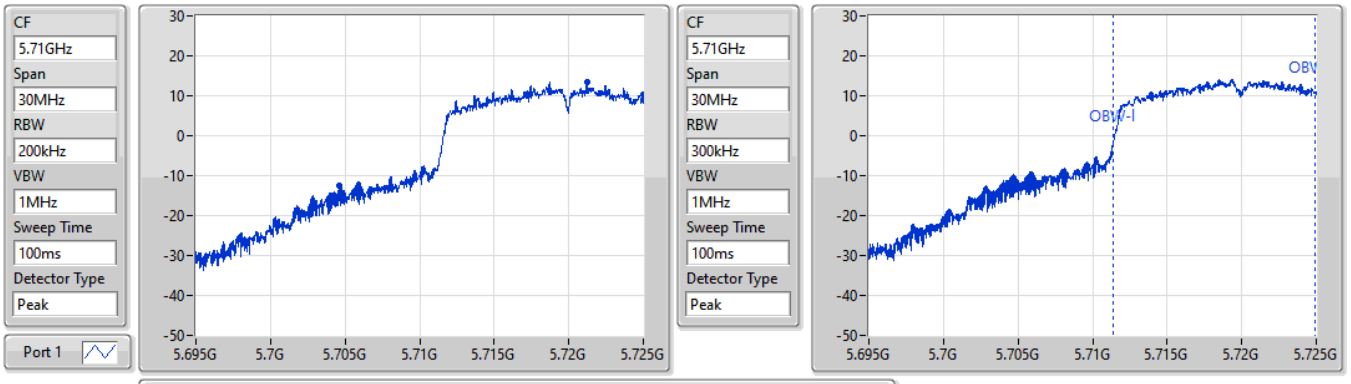


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.37M	5.70463G	5.725G	13.508M	5.711409G	5.724918G	Inf	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz

03/06/2022

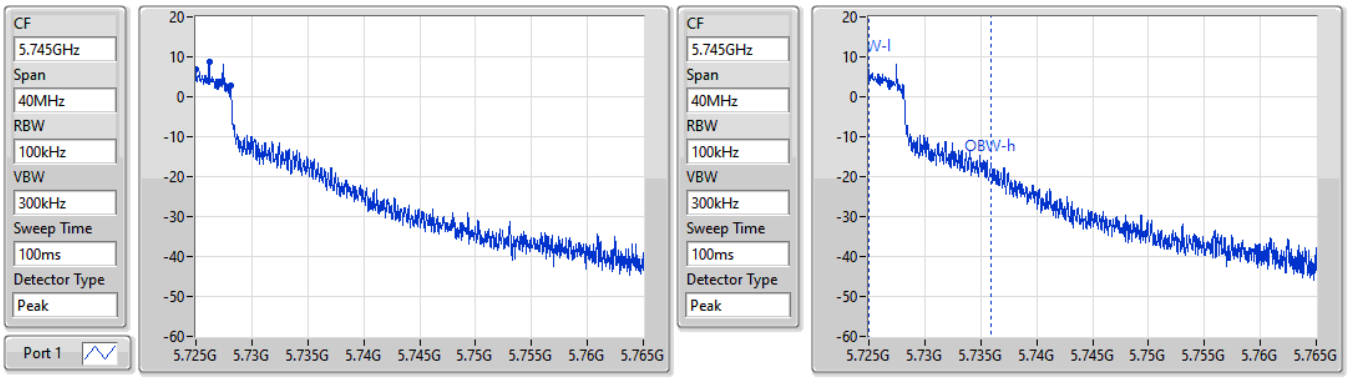


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.08M	5.725G	5.72808G	10.855M	5.72501G	5.735865G	500k	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz

03/06/2022

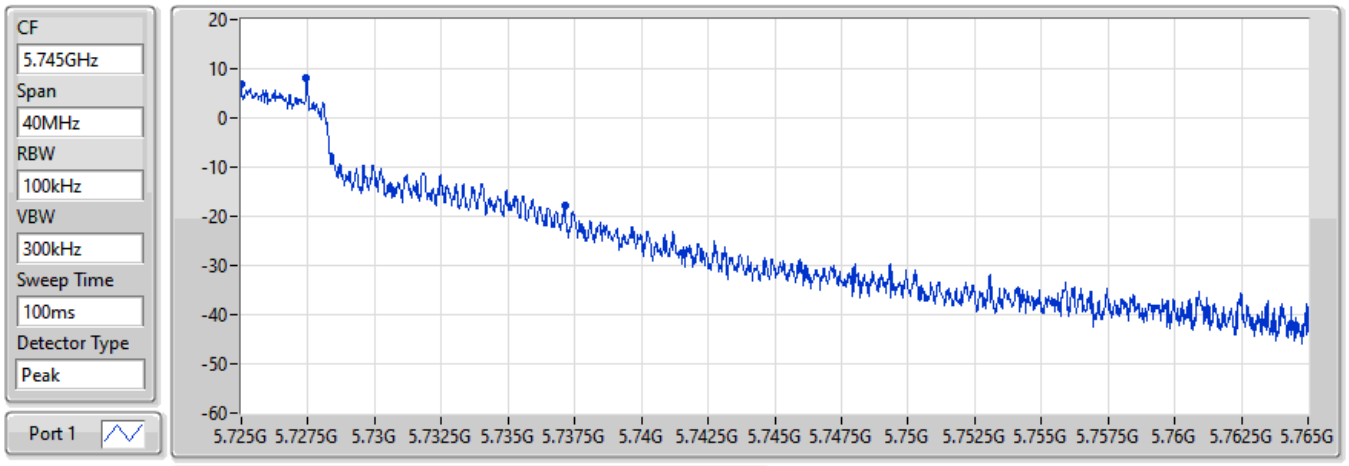


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
12.12M	5.725G	5.73712G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5745MHz

03/06/2022

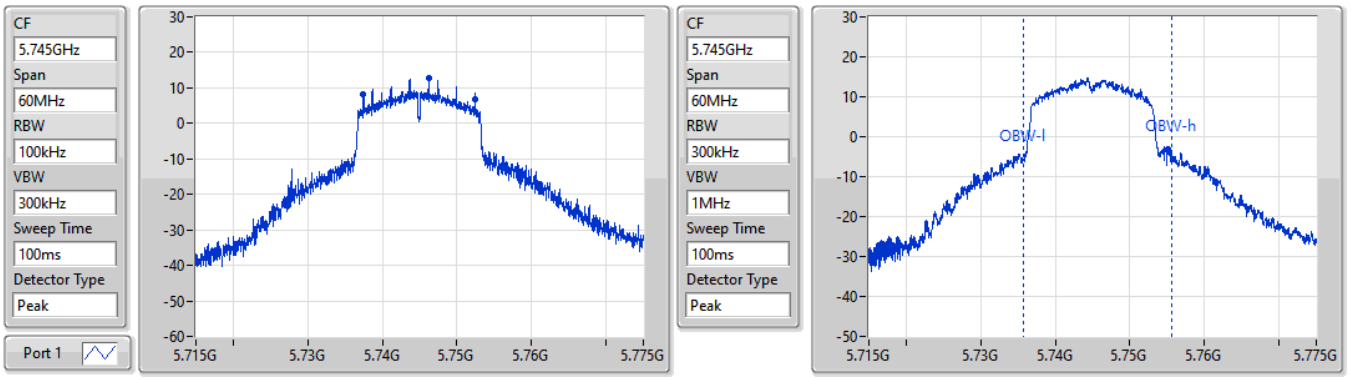


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.06M	5.73744G	5.7525G	19.82M	5.735735G	5.755555G	500k	1

802.11a_Nss1,(6Mbps)_1TX EBW

5745MHz

03/06/2022

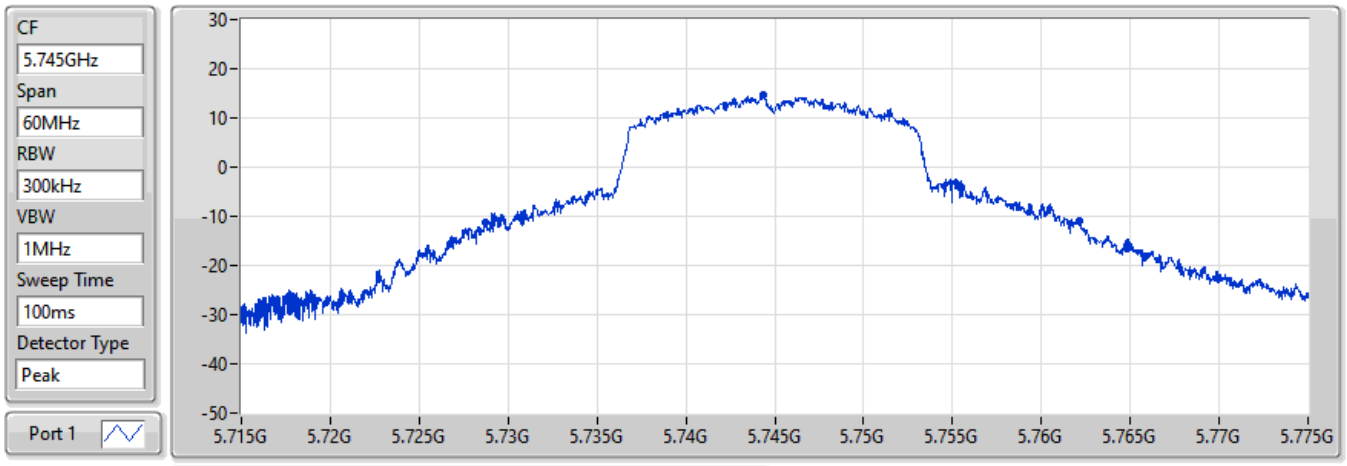


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
33.42M	5.72871G	5.76213G	Inf	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5785MHz

03/06/2022

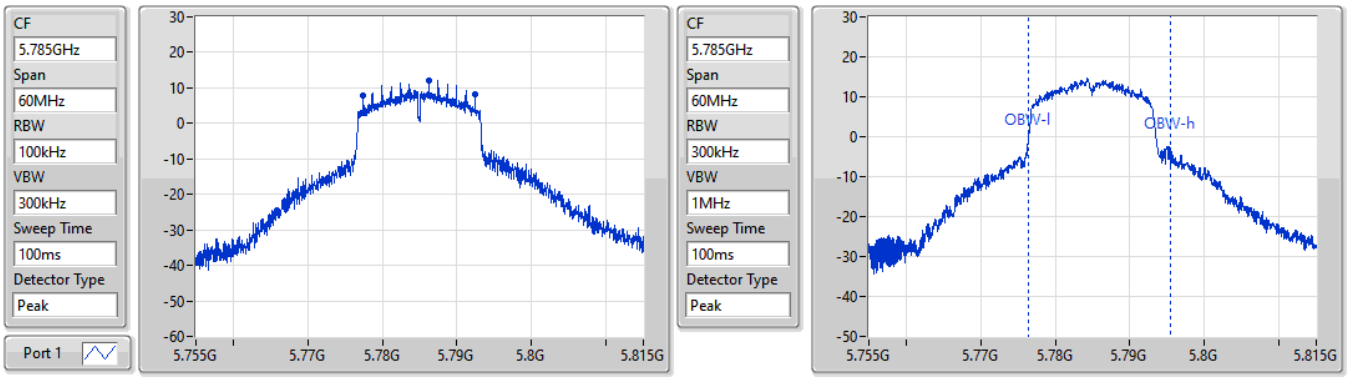


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15M	5.77747G	5.79247G	19.04M	5.776334G	5.795375G	500k	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5785MHz

03/06/2022

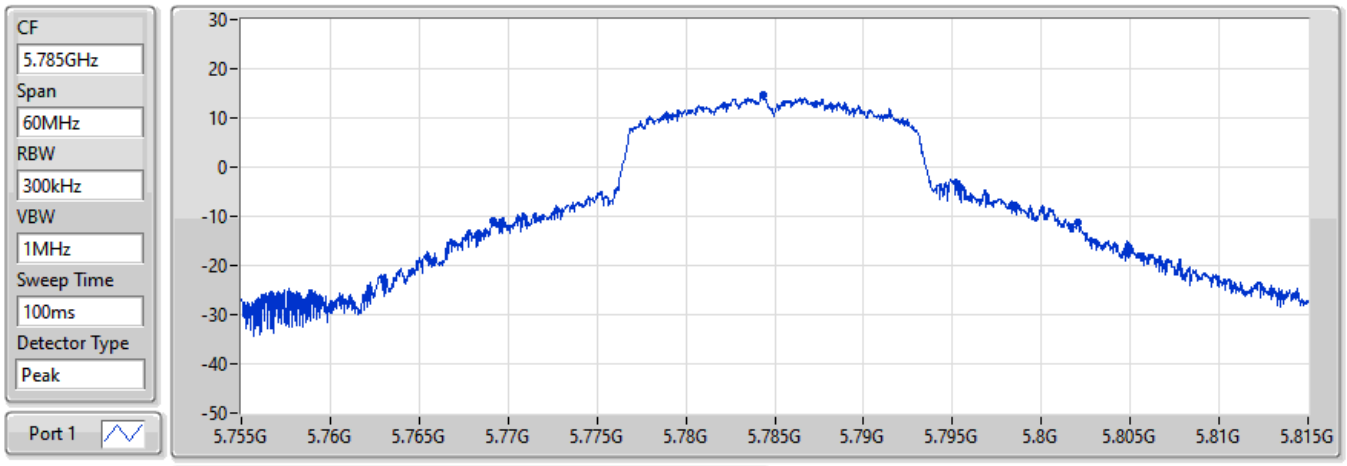


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
32.94M	5.76913G	5.80207G	Inf	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5825MHz

03/06/2022

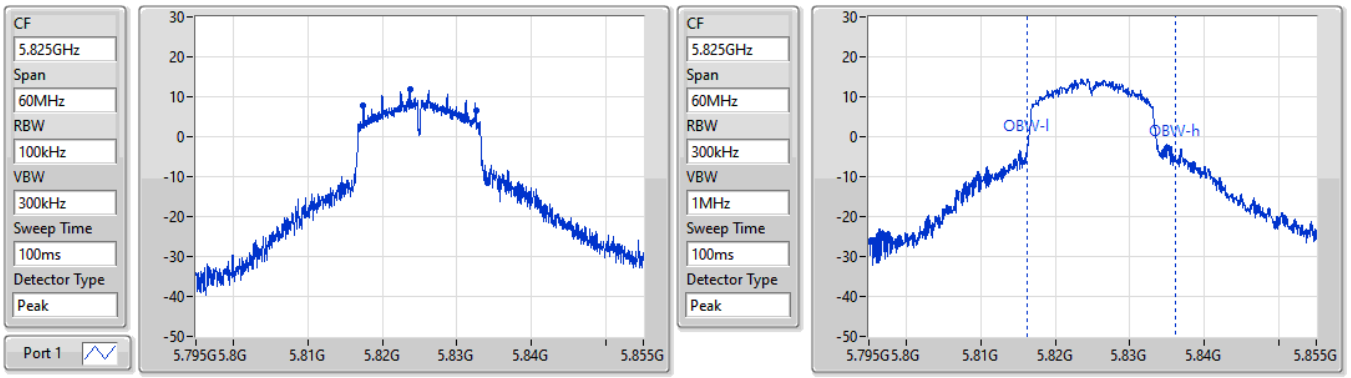


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.09M	5.81744G	5.83253G	19.85M	5.816214G	5.836064G	500k	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5825MHz

03/06/2022

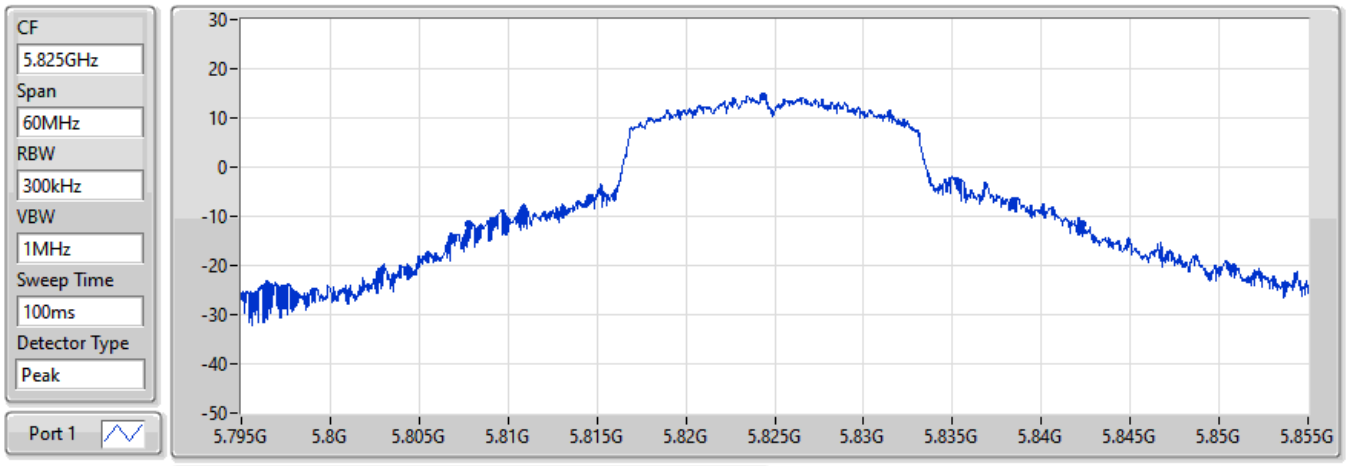


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
34.47M	5.80781G	5.84228G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5180MHz

20/05/2022

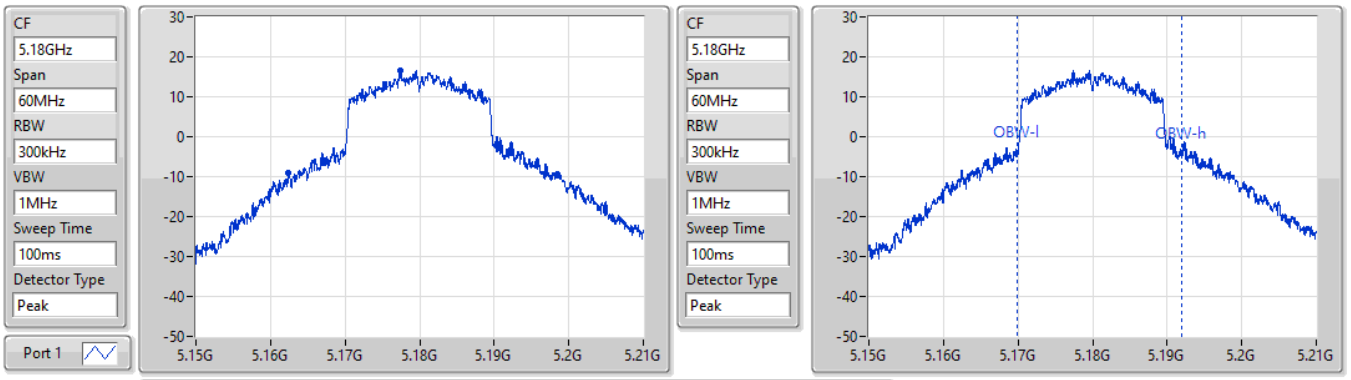


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
36.18M	5.16236G	5.19854G	22.069M	5.169865G	5.191934G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5200MHz

20/05/2022

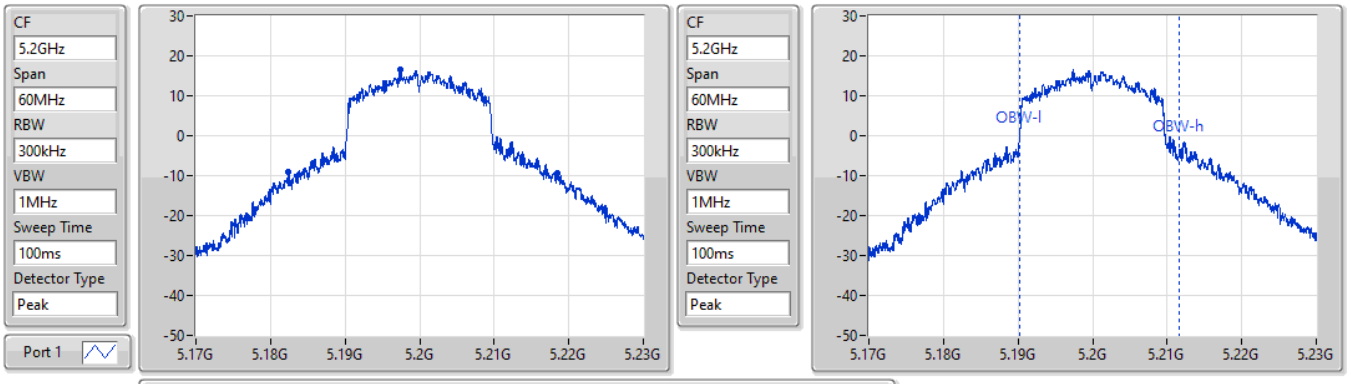


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
36.09M	5.18239G	5.21848G	21.499M	5.190165G	5.211664G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5240MHz

20/05/2022

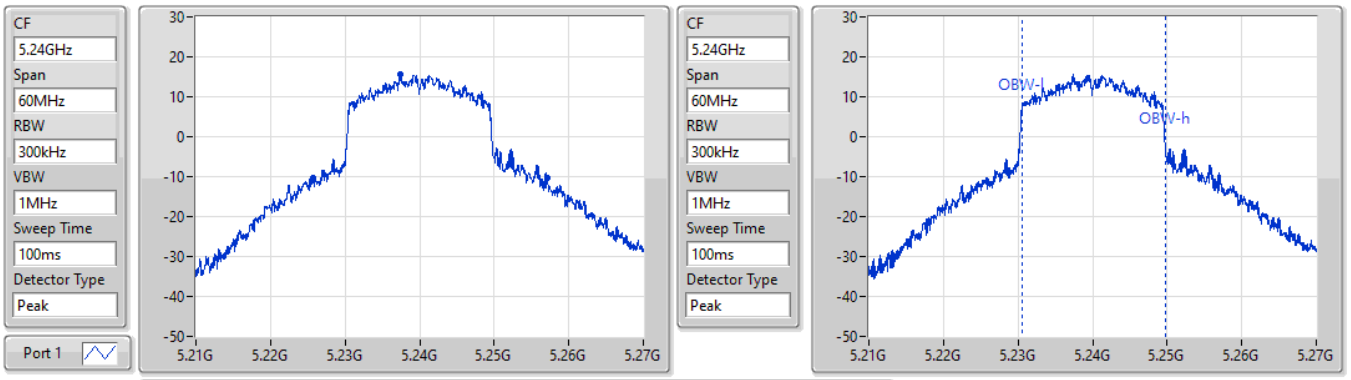


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.47M	5.22566G	5.25713G	19.22M	5.230495G	5.249715G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5260MHz

20/05/2022

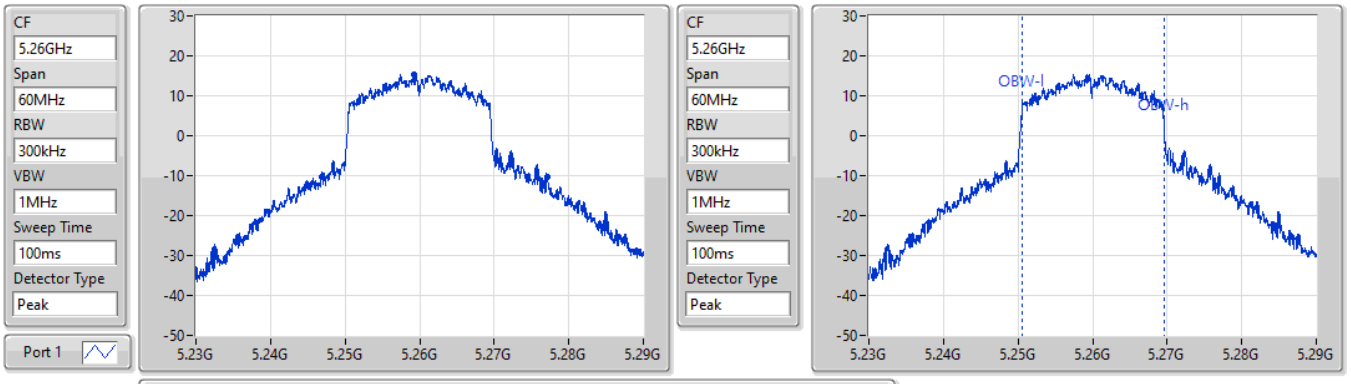


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
30.33M	5.2468G	5.27713G	19.04M	5.250555G	5.269595G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5300MHz

20/05/2022

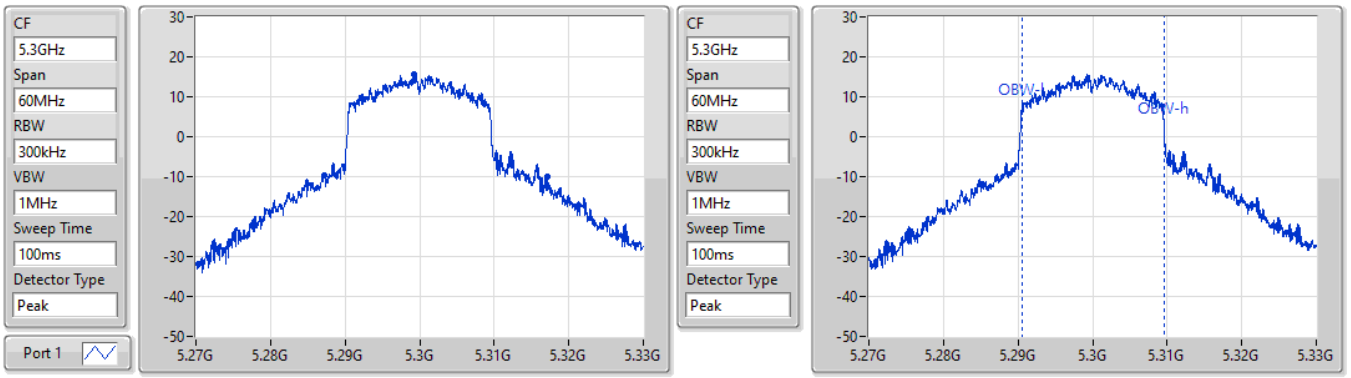


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
29.94M	5.28716G	5.3171G	19.07M	5.290525G	5.309595G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5320MHz

20/05/2022

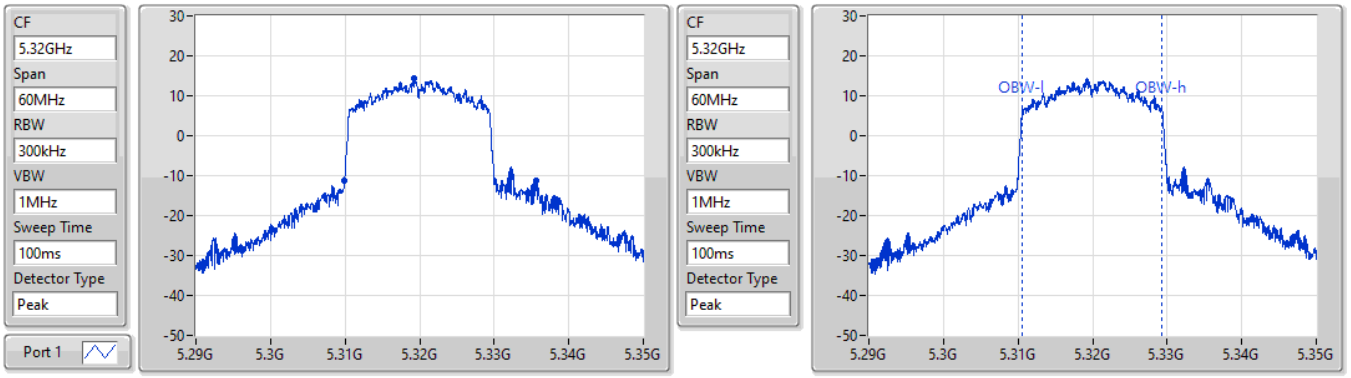


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
25.74M	5.30992G	5.33566G	18.741M	5.310615G	5.329355G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5500MHz

20/05/2022

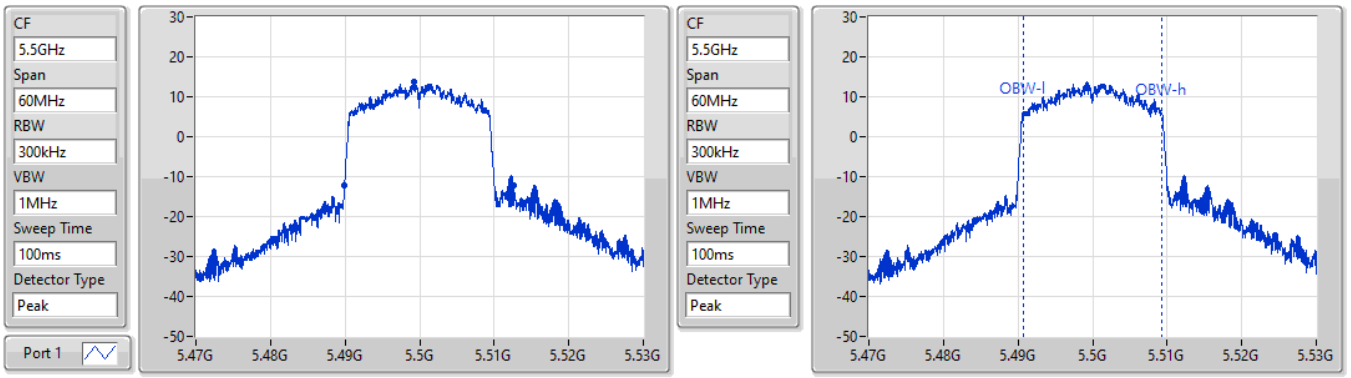


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.68M	5.48992G	5.5126G	18.681M	5.490645G	5.509325G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5580MHz

20/05/2022

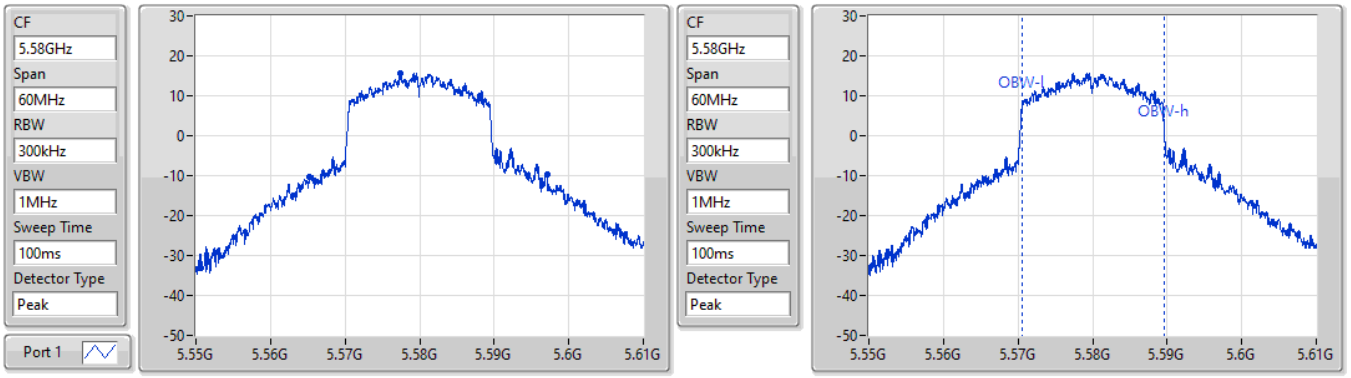


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.8M	5.56527G	5.59707G	19.16M	5.570495G	5.589655G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5700MHz

20/05/2022

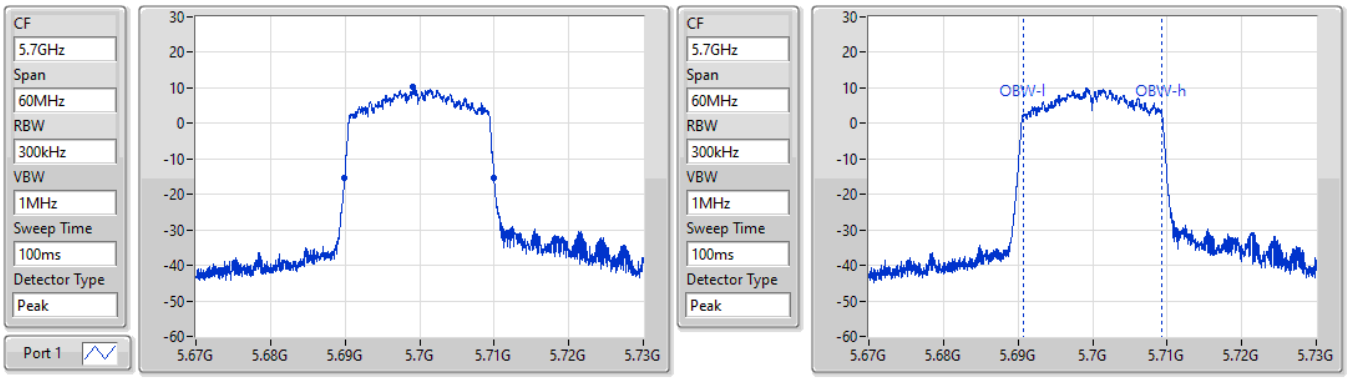


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.07M	5.68992G	5.70999G	18.621M	5.690645G	5.709265G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.47-5.725GHz

03/06/2022

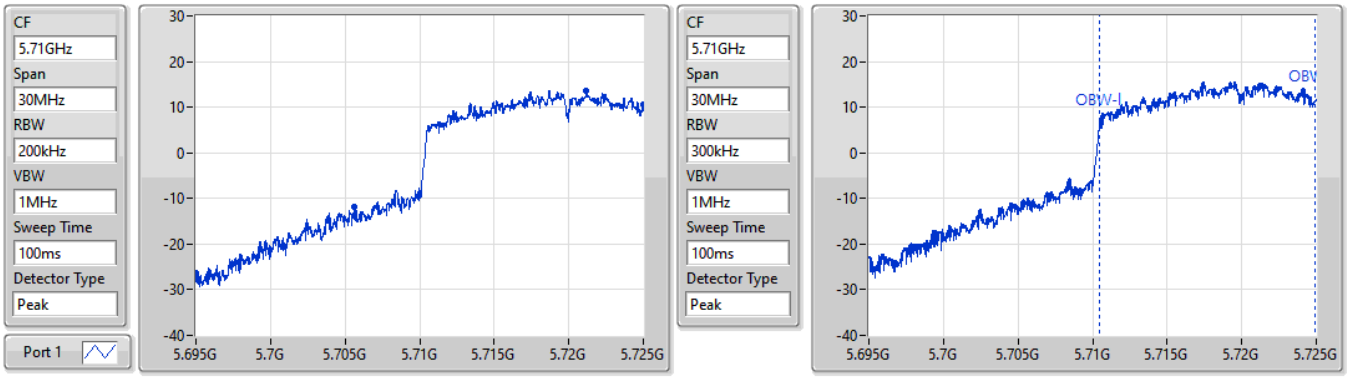


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.395M	5.705605G	5.725G	14.453M	5.71045G	5.724903G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz

03/06/2022

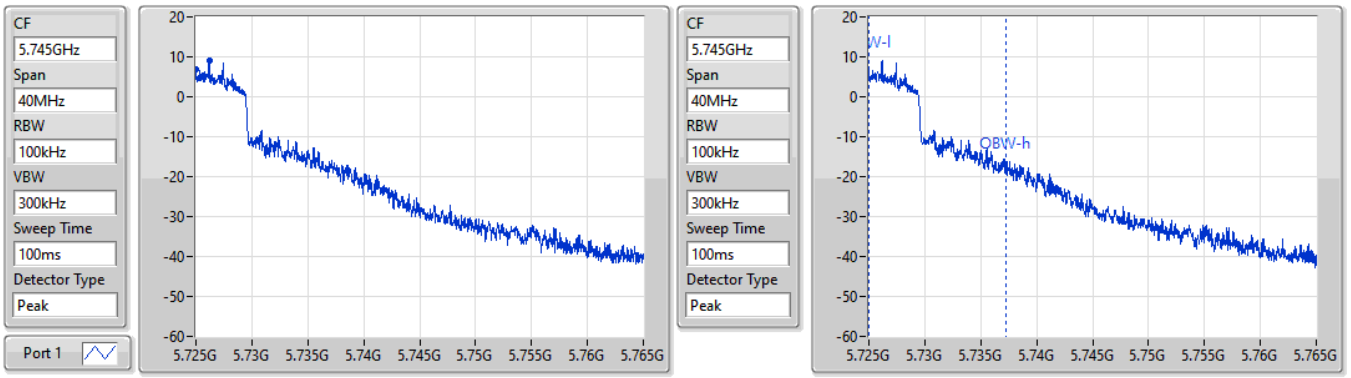


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.34M	5.725G	5.72834G	12.234M	5.72501G	5.737244G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz

03/06/2022

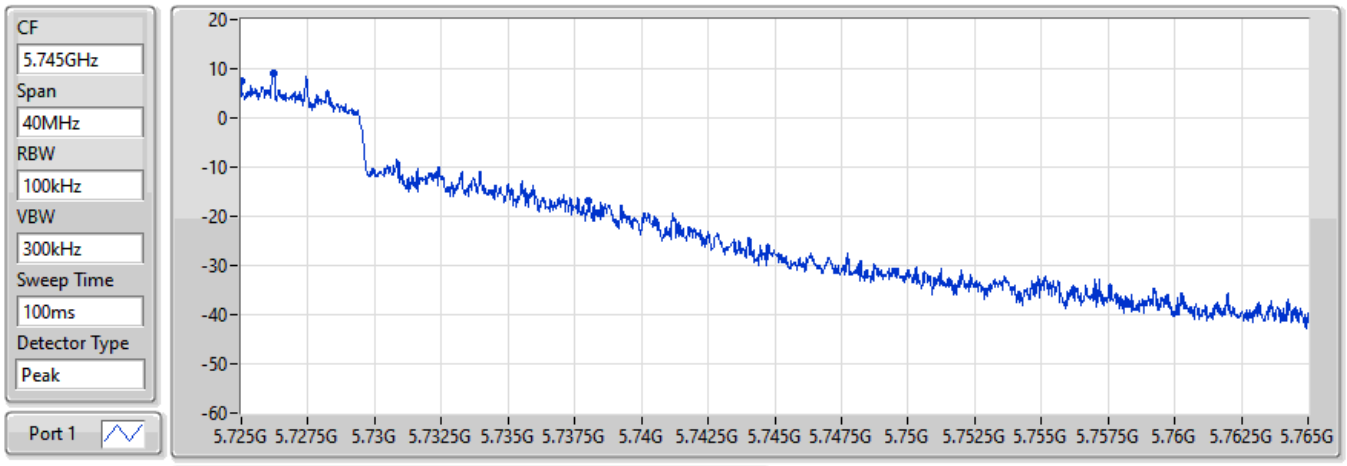


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
13.02M	5.725G	5.73802G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5745MHz

03/06/2022

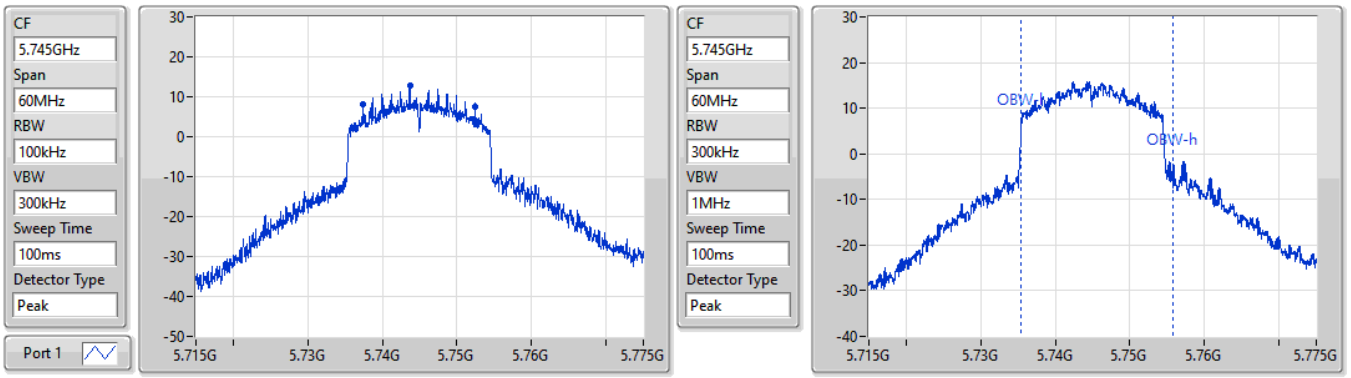


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15M	5.73747G	5.75247G	20.39M	5.735435G	5.755825G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5745MHz

03/06/2022

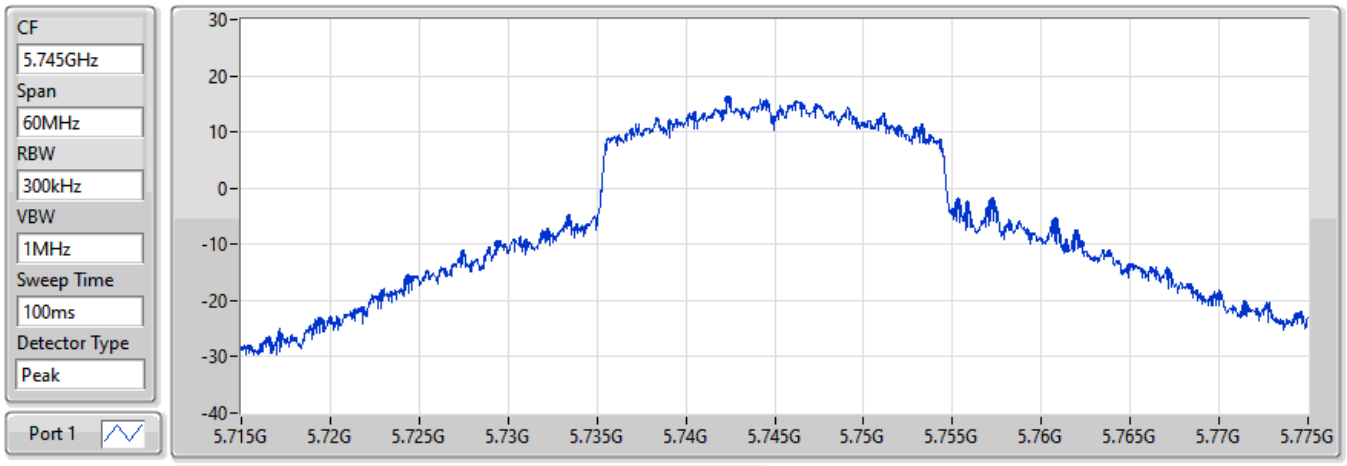


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
32.82M	5.72943G	5.76225G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5785MHz

03/06/2022

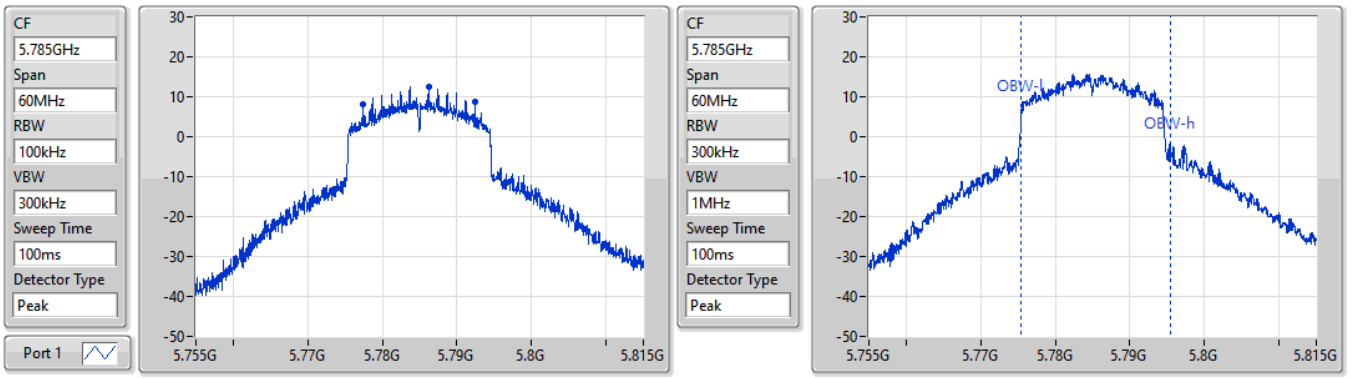


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.03M	5.77744G	5.79247G	20M	5.775465G	5.795465G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5785MHz

03/06/2022

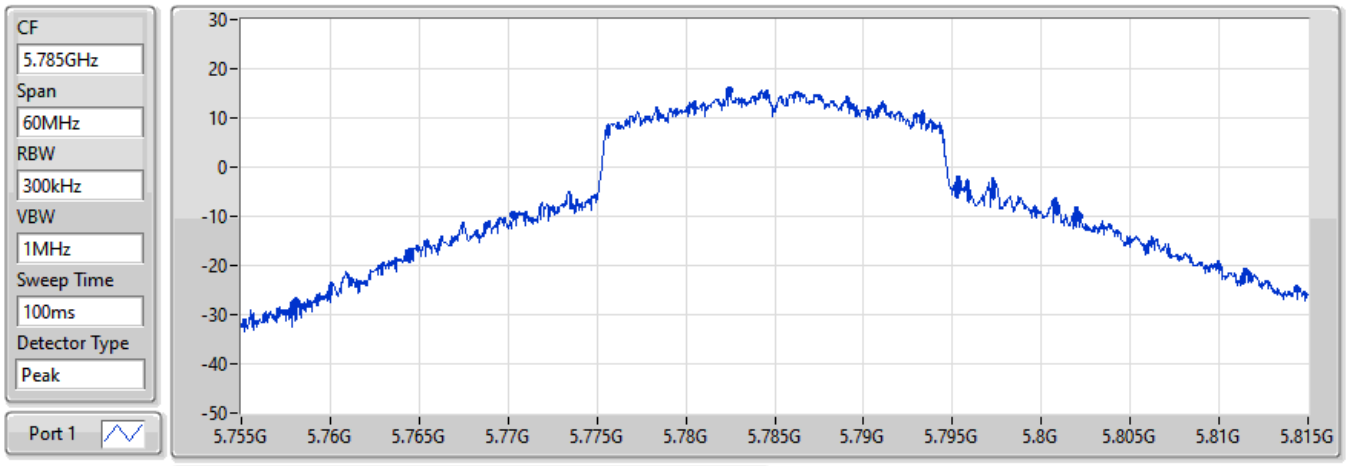


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
31.92M	5.77024G	5.80216G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5825MHz

03/06/2022

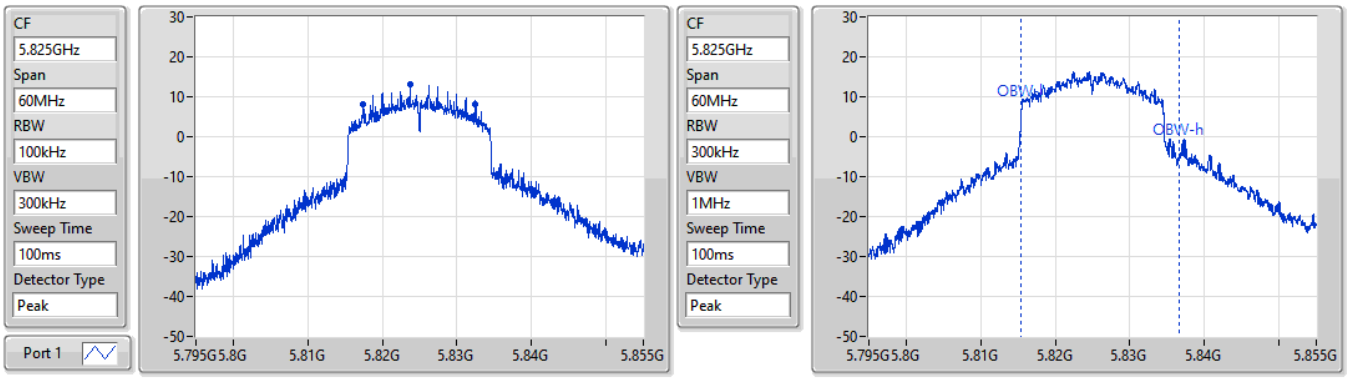


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.06M	5.81744G	5.8325G	21.199M	5.815465G	5.836664G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5825MHz

03/06/2022

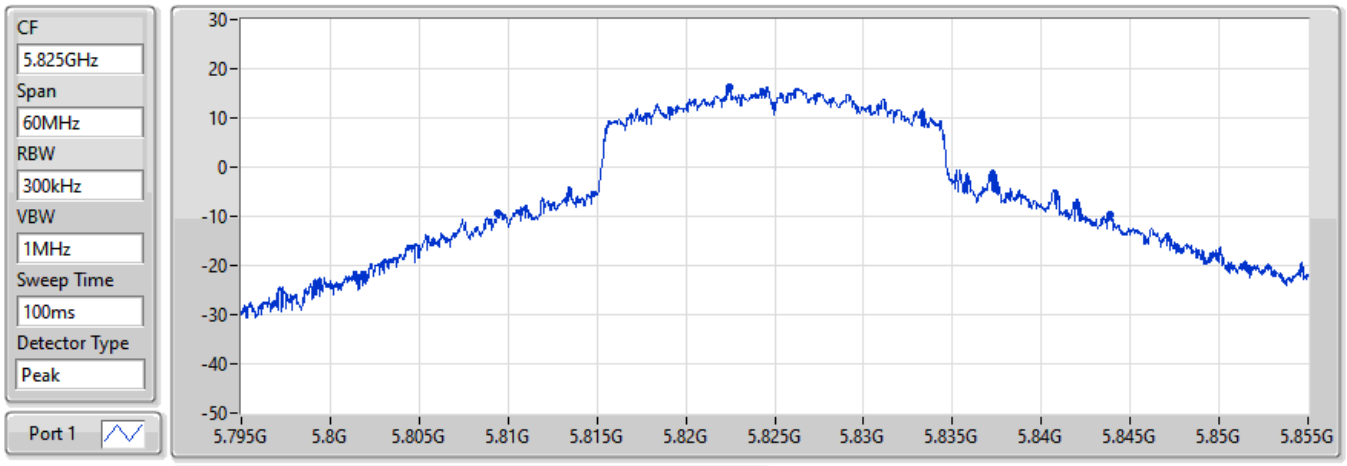


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
34.41M	5.80943G	5.84384G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5190MHz

20/05/2022

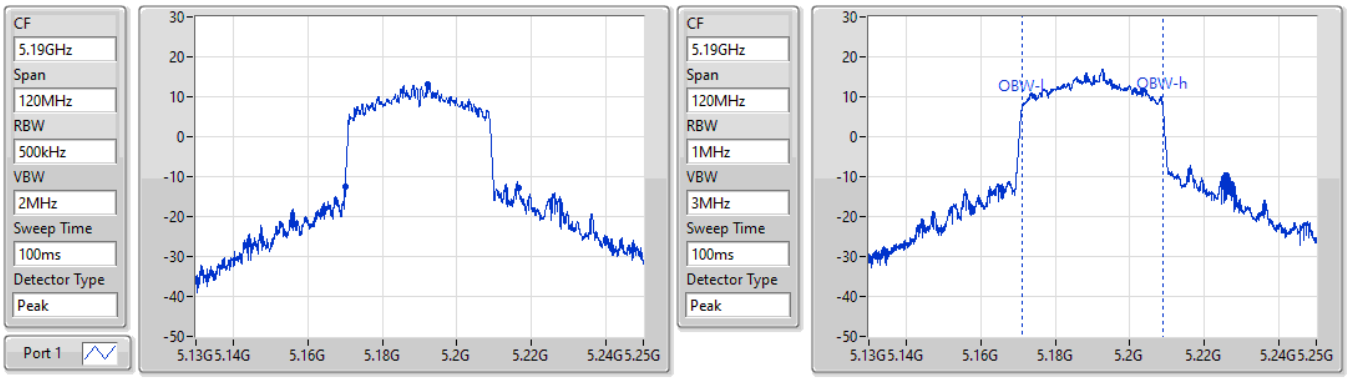


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
46.44M	5.17002G	5.21646G	37.781M	5.171109G	5.208891G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5230MHz

20/05/2022

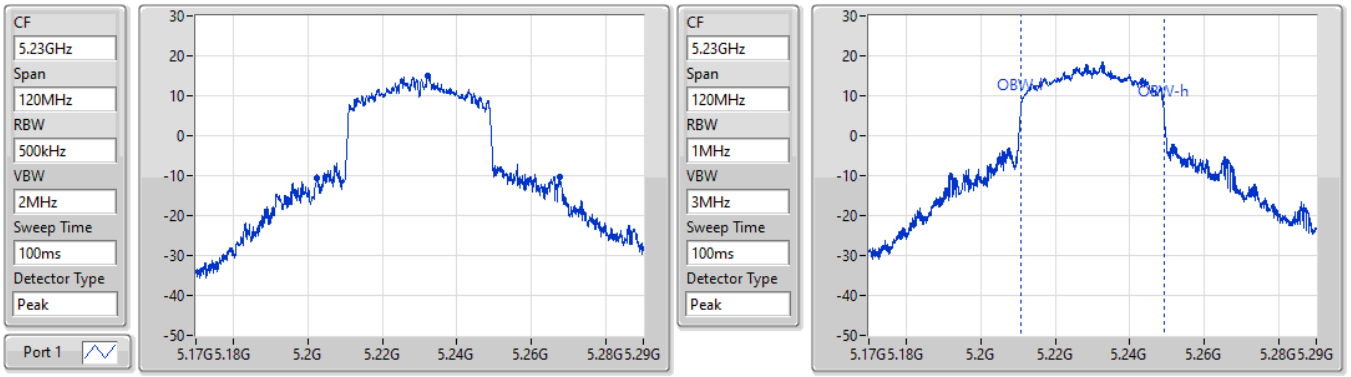


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
65.04M	5.20246G	5.2675G	38.381M	5.21087G	5.24925G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5270MHz

20/05/2022

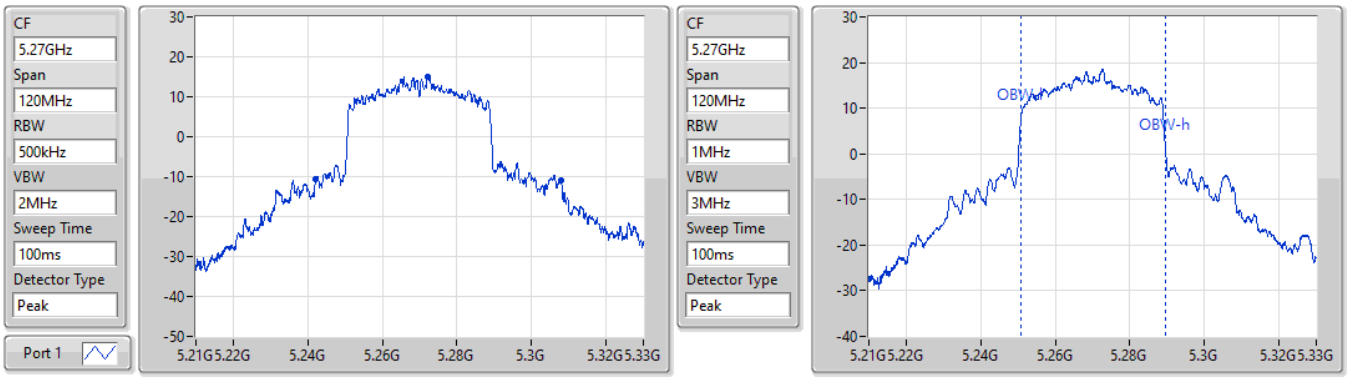


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
65.82M	5.24216G	5.30798G	38.801M	5.25075G	5.28955G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5310MHz

20/05/2022

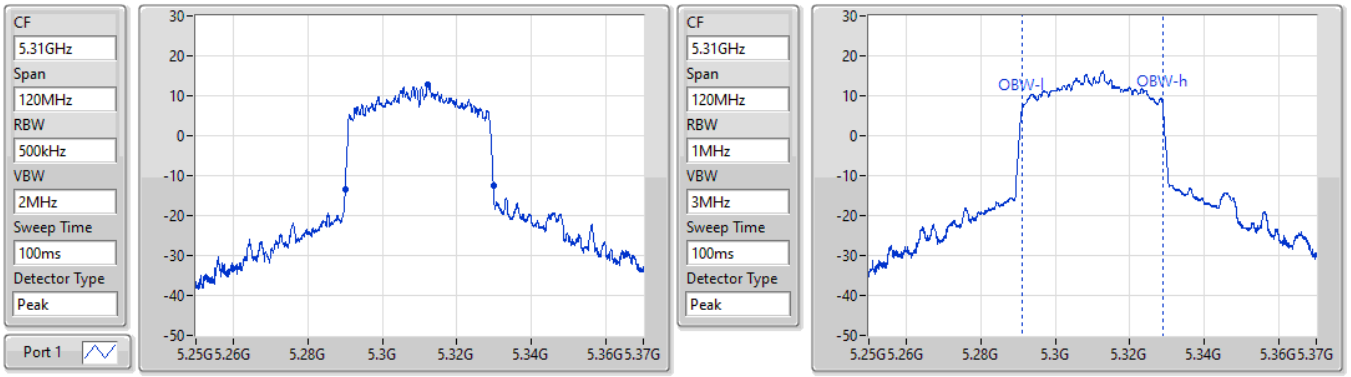


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.78M	5.29002G	5.3298G	37.601M	5.291169G	5.328771G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5510MHz

20/05/2022

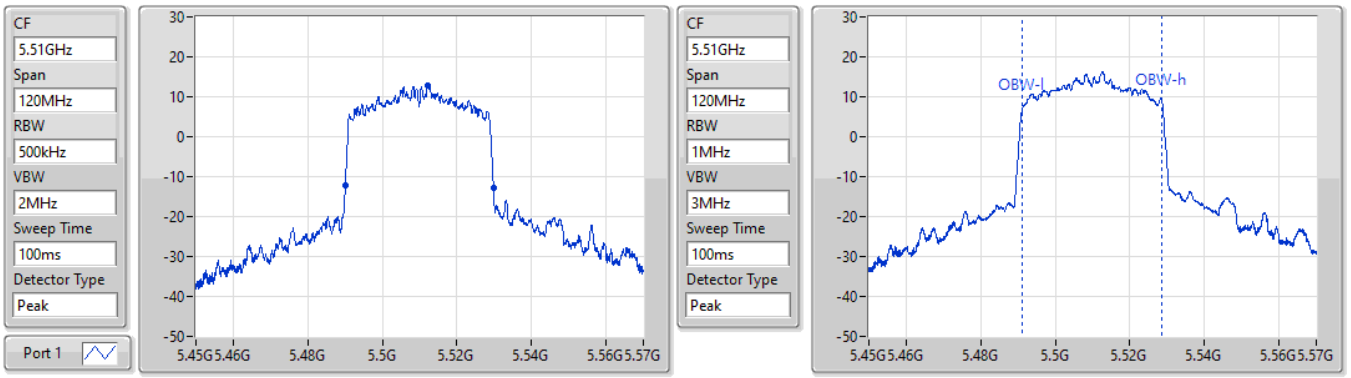


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.72M	5.49008G	5.5298G	37.481M	5.491229G	5.528711G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5550MHz

20/05/2022

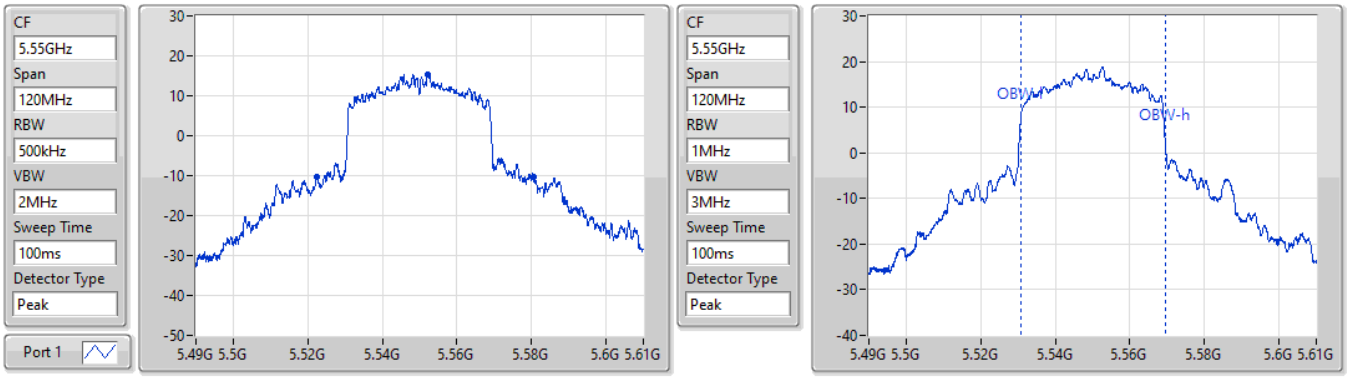


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
58.08M	5.52234G	5.58042G	38.681M	5.53075G	5.56943G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX **EBW**

5670MHz

20/05/2022

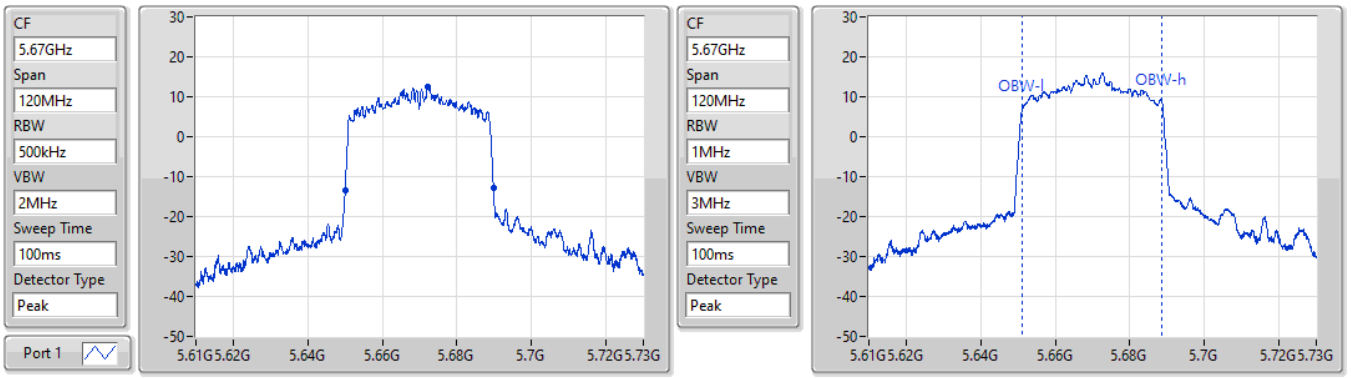


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.78M	5.65002G	5.6898G	37.541M	5.651169G	5.688711G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX **EBW**

5710MHz Straddle 5.47-5.725GHz

03/06/2022

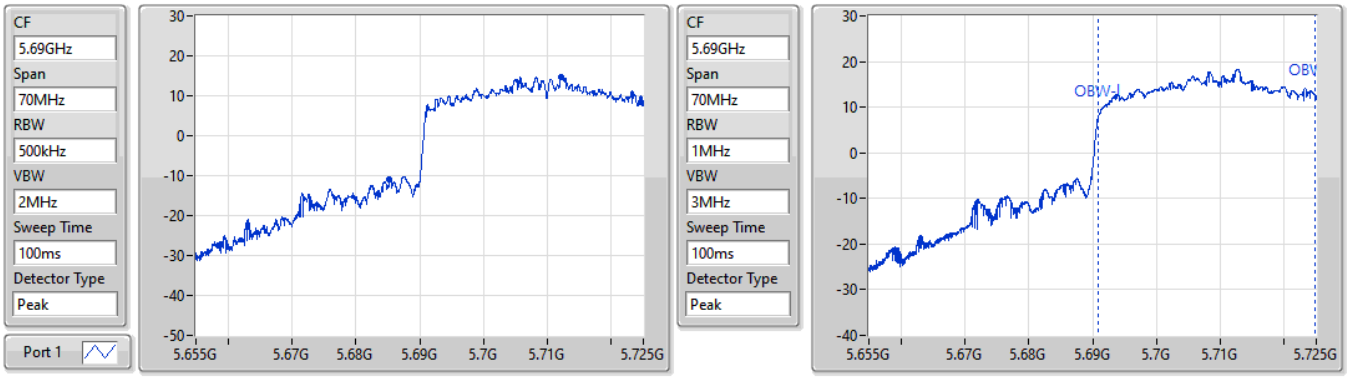


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.795M	5.685205G	5.725G	33.828M	5.69091G	5.724738G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5710MHz Straddle 5.725-5.85GHz

03/06/2022

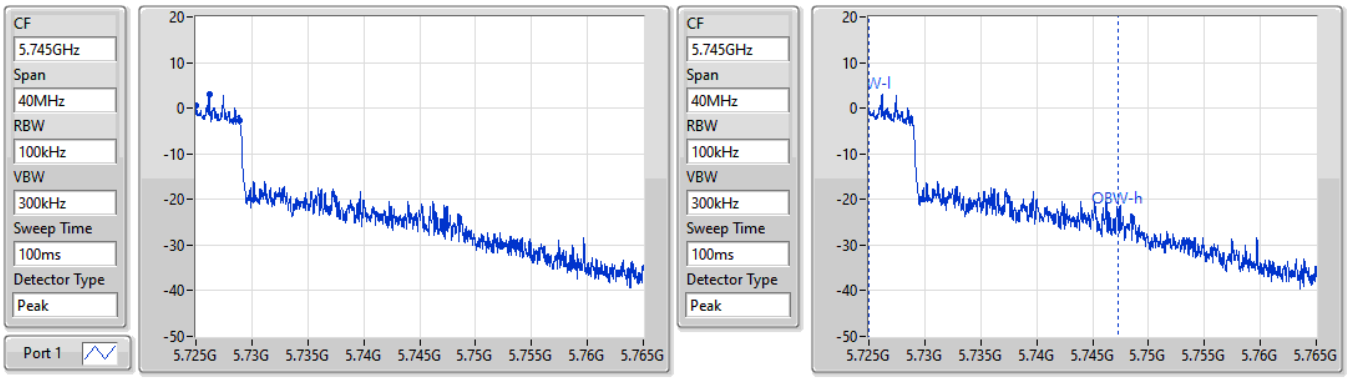


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.9M	5.725G	5.7289G	22.289M	5.72501G	5.747299G	500k	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5710MHz Straddle 5.725-5.85GHz


03/06/2022

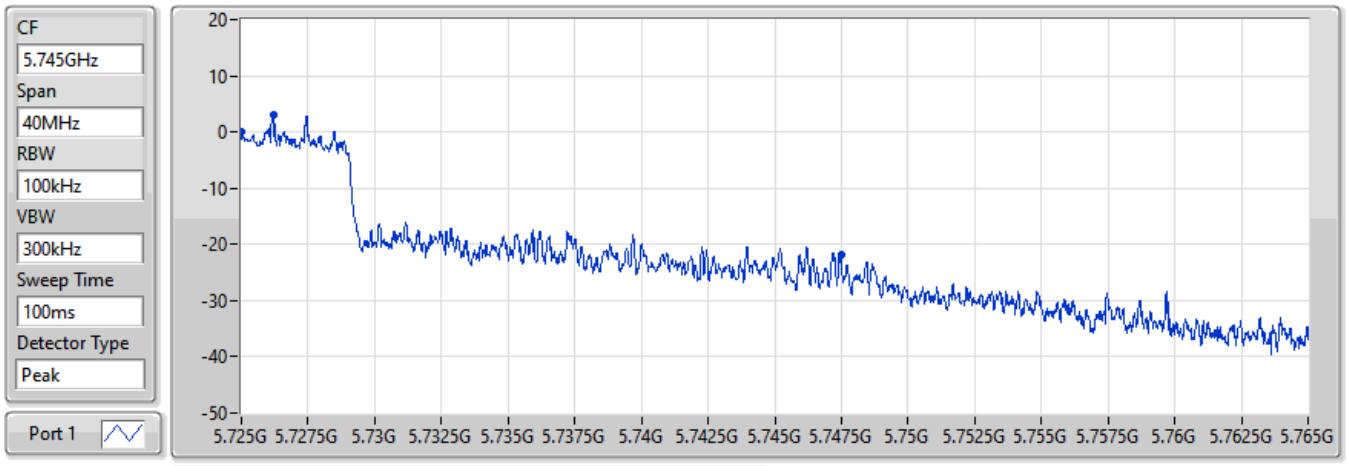

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
22.48M	5.725G	5.74748G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW


5755MHz

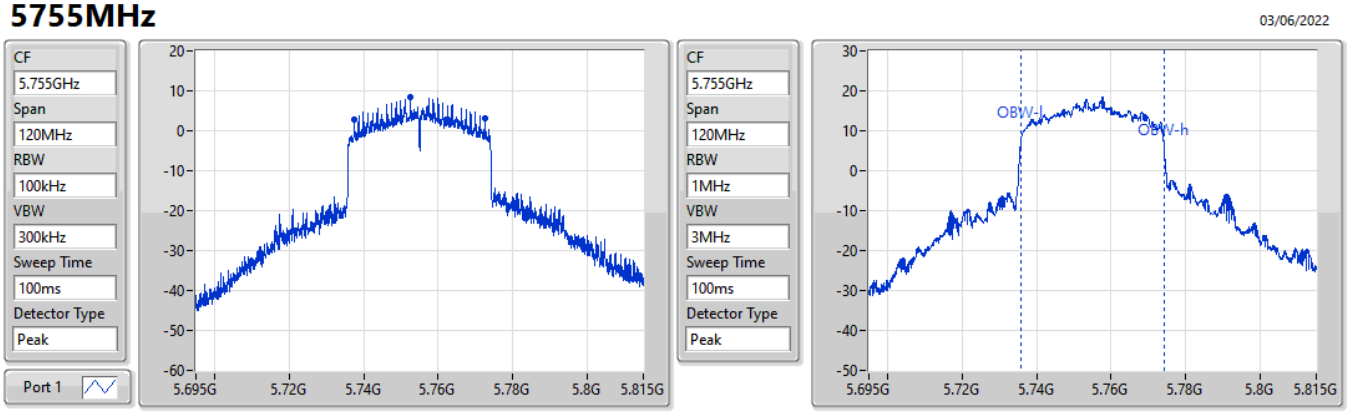

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
35.04M	5.73742G	5.77246G	38.381M	5.73593G	5.77431G	500k	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW


5755MHz

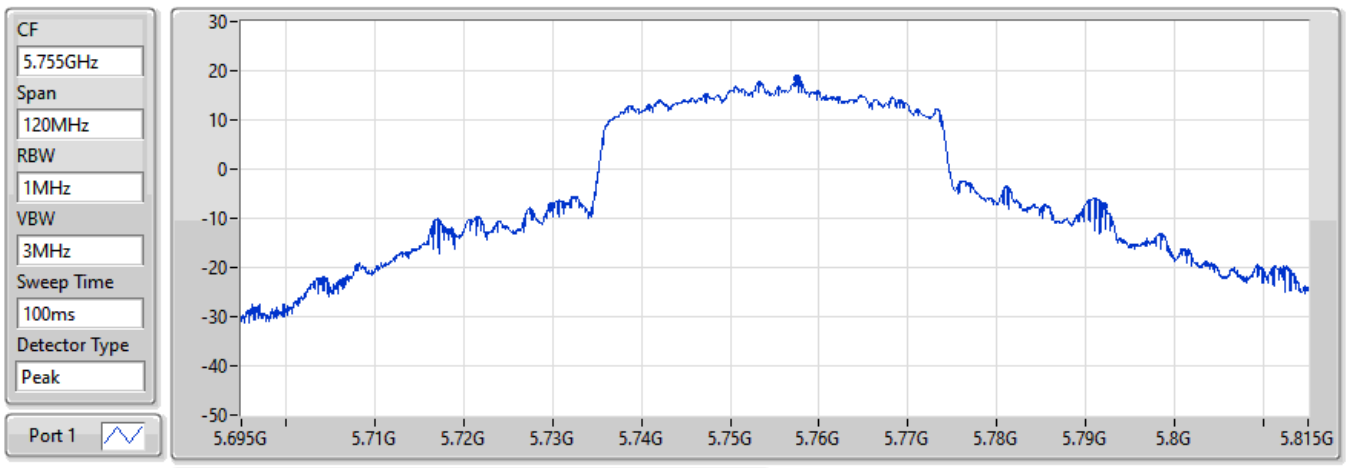

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
62.28M	5.7298G	5.79208G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW


5795MHz

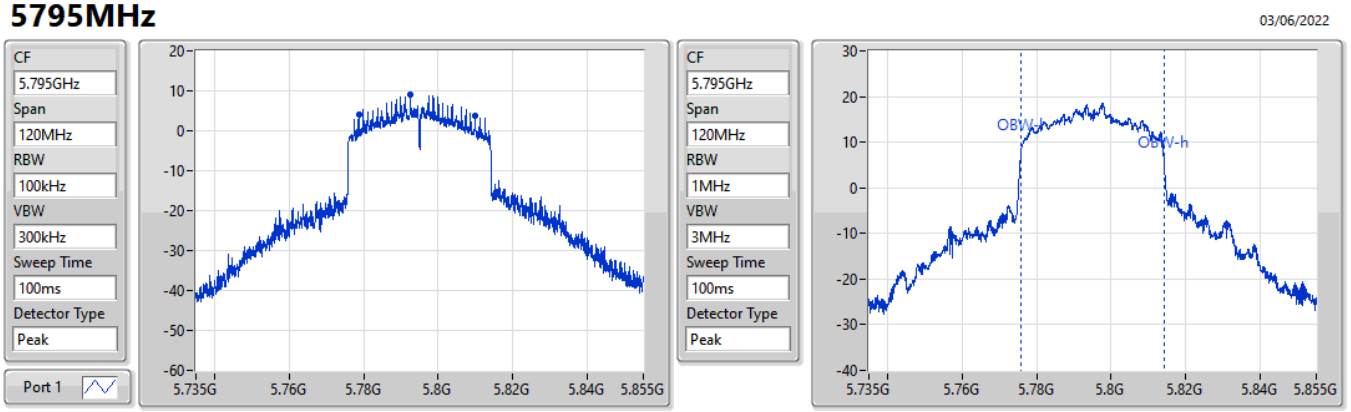

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.26M	5.77868G	5.80994G	38.381M	5.77587G	5.81425G	500k	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW


5795MHz

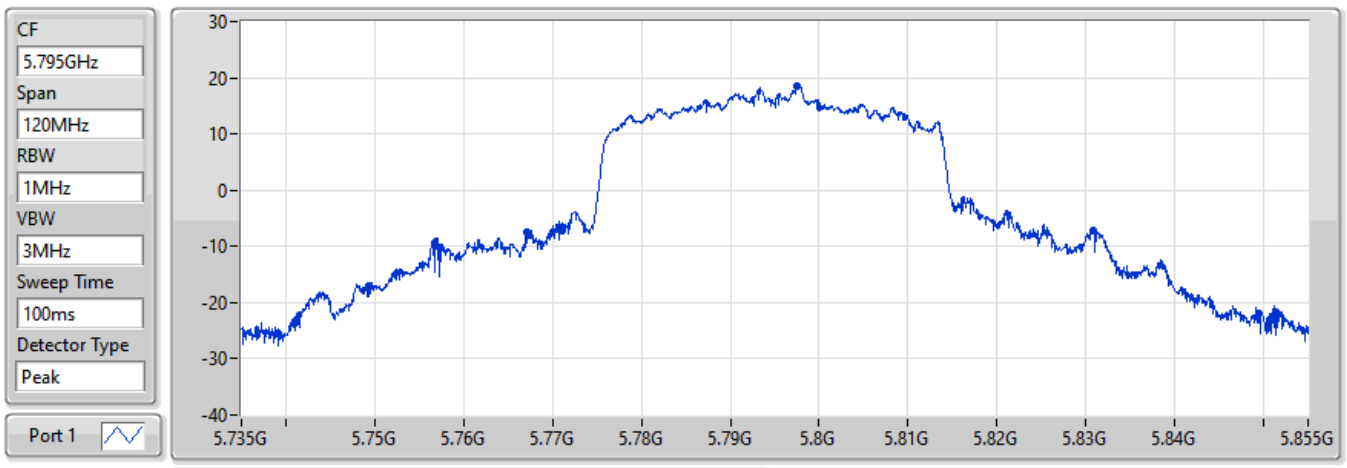

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
63.78M	5.7671G	5.83088G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW


5210MHz

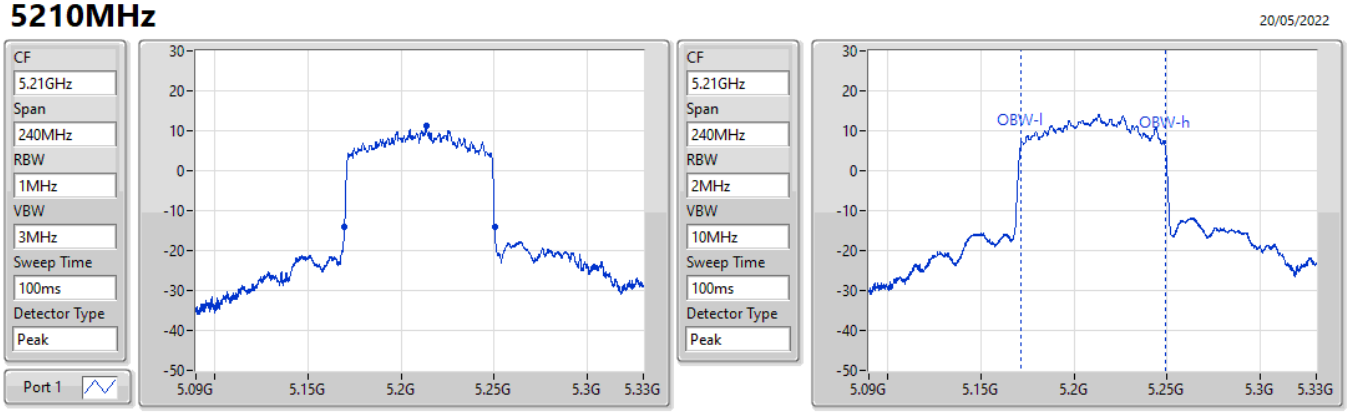

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.16968G	5.2502G	77.481M	5.171499G	5.248981G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5290MHz

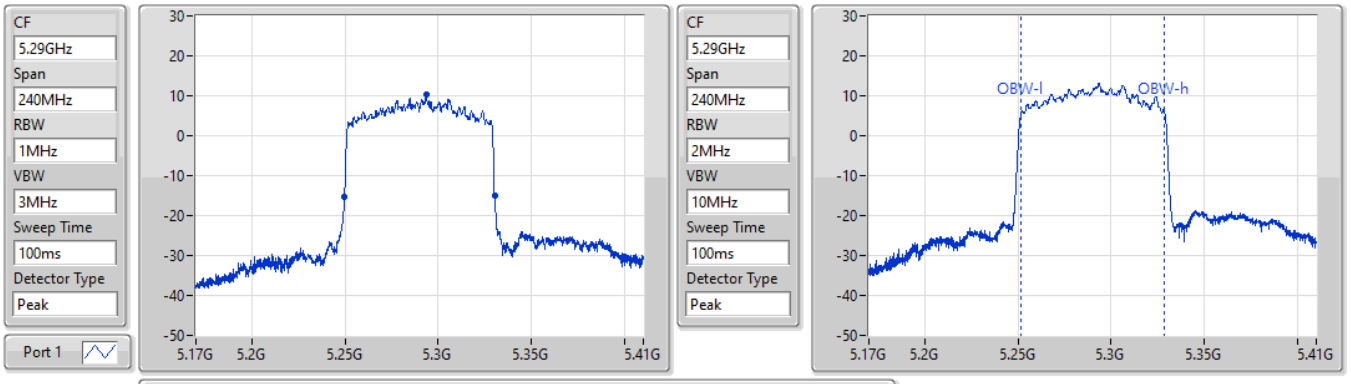


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.24968G	5.3302G	77.121M	5.251619G	5.328741G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5530MHz

20/05/2022

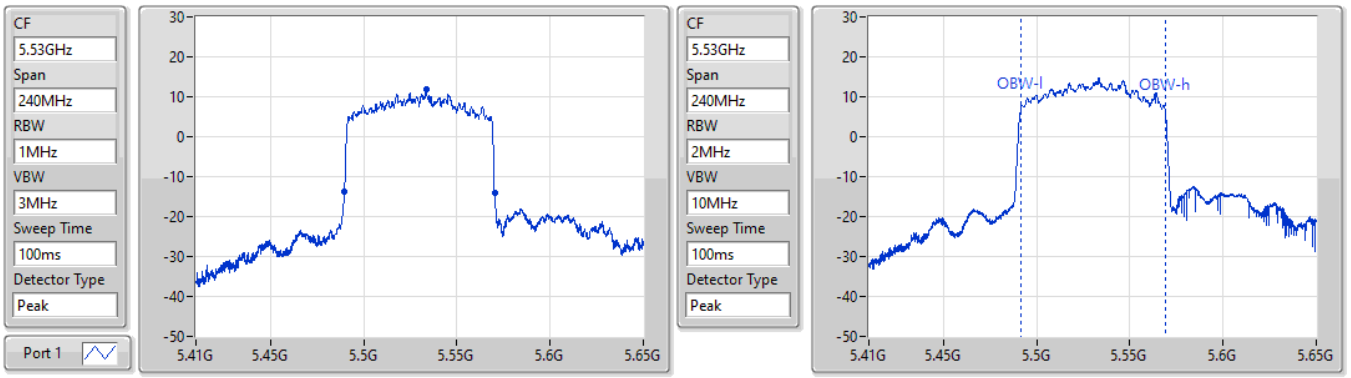


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.48968G	5.5702G	77.361M	5.491499G	5.568861G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5610MHz

20/05/2022

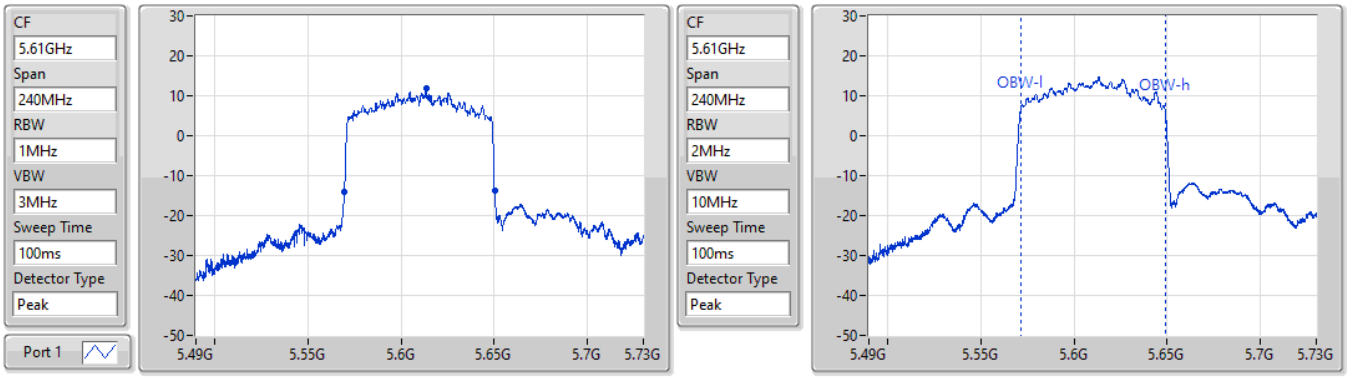


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.56968G	5.6502G	77.241M	5.571619G	5.648861G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5690MHz Straddle 5.47-5.725GHz

03/06/2022

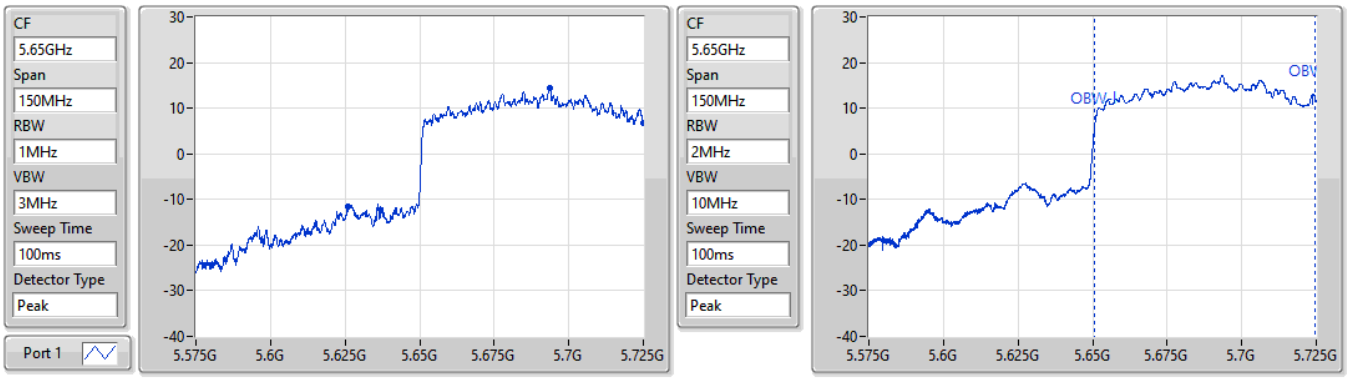


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
98.925M	5.626075G	5.725G	73.613M	5.650825G	5.724438G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5690MHz Straddle 5.725-5.85GHz

03/06/2022

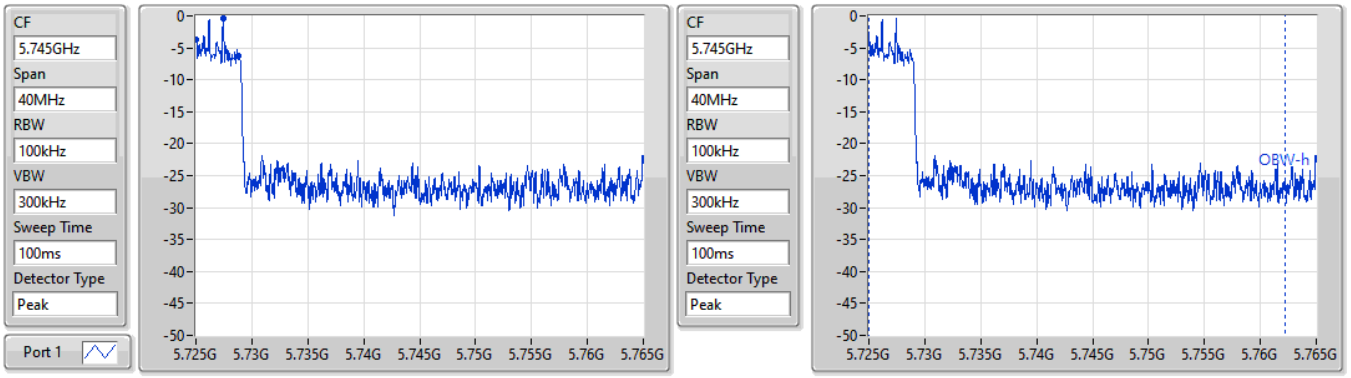


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.78M	5.725G	5.72878G	37.201M	5.72501G	5.762211G	500k	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5690MHz Straddle 5.725-5.85GHz

03/06/2022

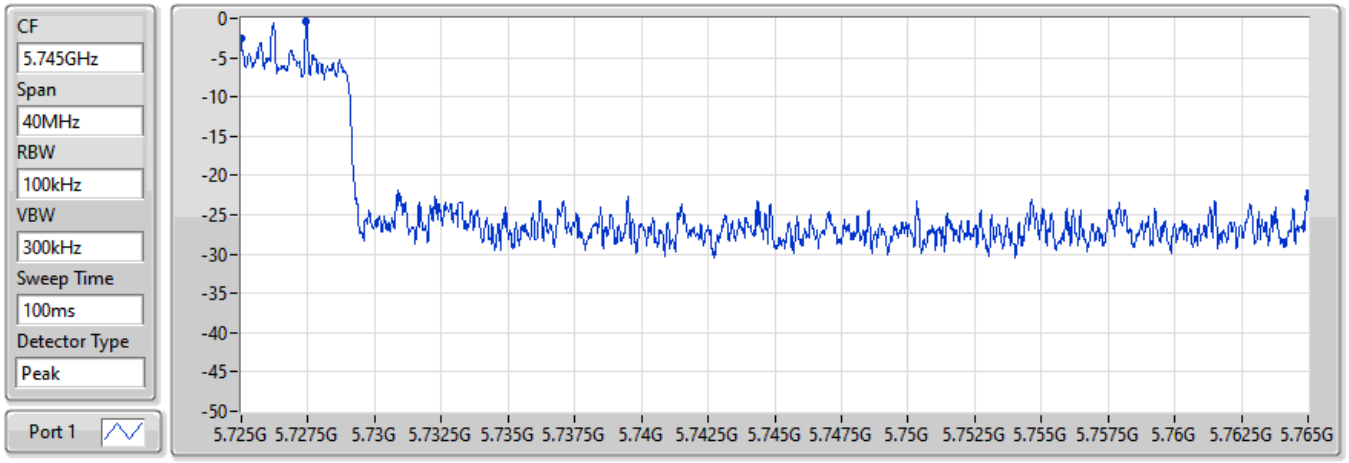


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
40M	5.725G	5.765G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5775MHz

03/06/2022

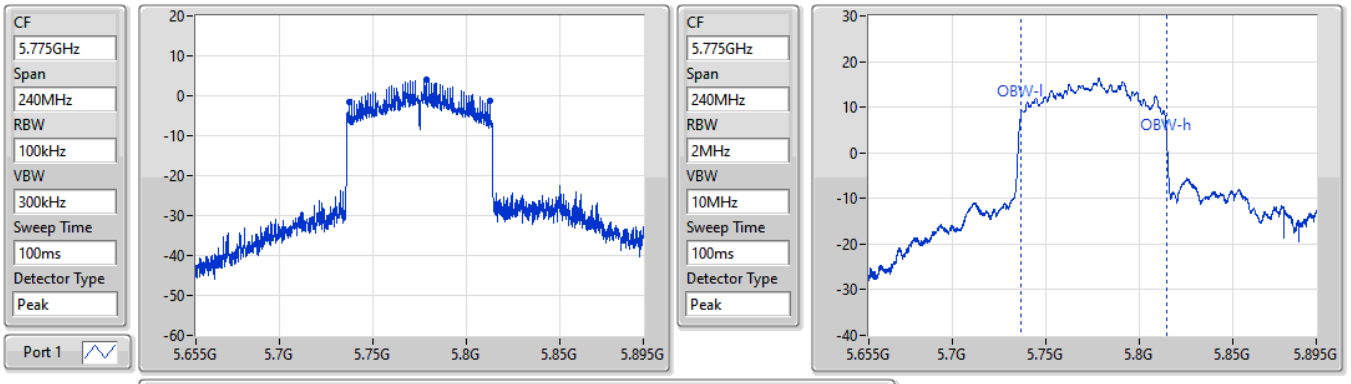


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
75M	5.73744G	5.81244G	78.681M	5.736379G	5.81506G	500k	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5775MHz

03/06/2022

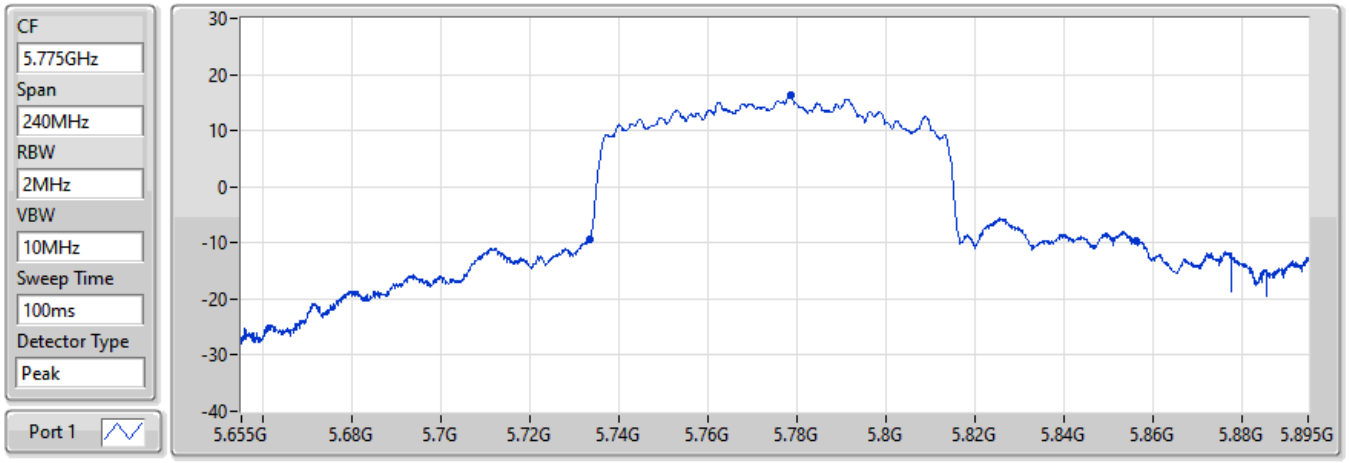


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
123M	5.73324G	5.85624G	Inf	1

802.11ax HEW160_Nss1,(MCS0)_1TX EBW

5250MHz Straddle 5.15-5.25GHz

20/05/2022

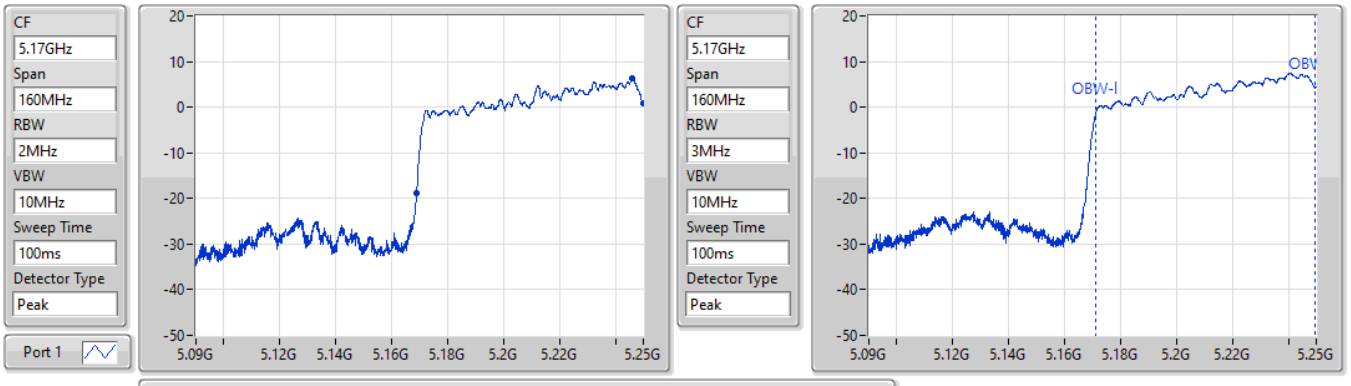


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
81.12M	5.16888G	5.25G	78.521M	5.171119G	5.24964G	Inf	1

802.11ax HEW160_Nss1,(MCS0)_1TX **EBW**

5250MHz Straddle 5.25-5.35GHz

20/05/2022

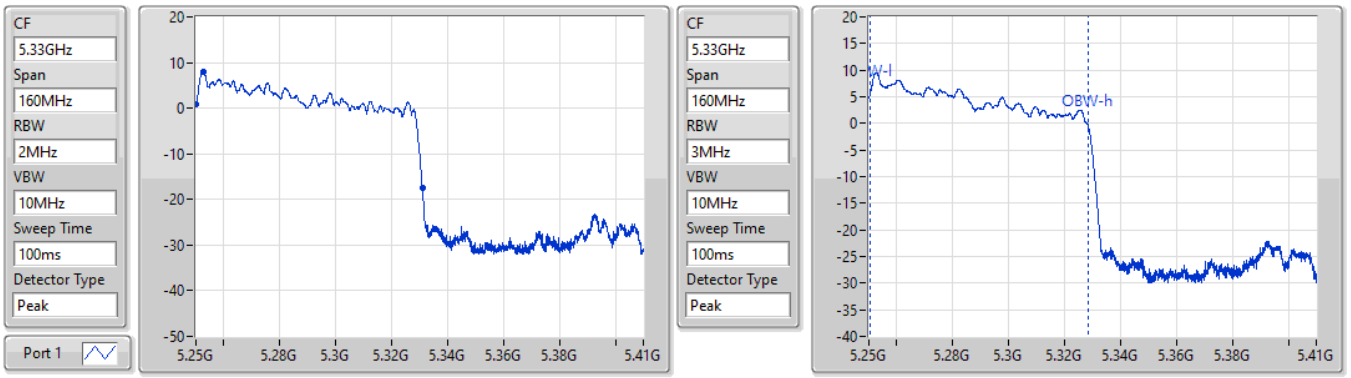


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.96M	5.25G	5.33096G	78.121M	5.25036G	5.328481G	Inf	1

802.11ax HEW160_Nss1,(MCS0)_1TX **EBW**

5570MHz

03/06/2022

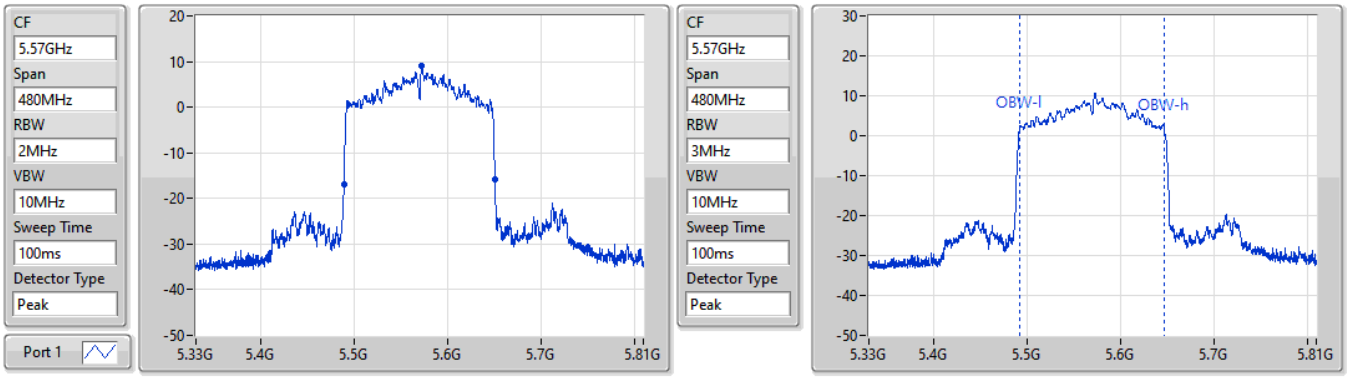

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
162M	5.48888G	5.65088G	154.963M	5.492039G	5.647001G	Inf	1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	34.98M	22.009M	22M0D1D	32.19M	18.441M
802.11ax HEW20_Nss1,(MCS0)_1TX	36.18M	22.069M	22M1D1D	31.47M	19.22M
802.11ax HEW40_Nss1,(MCS0)_1TX	65.04M	38.381M	38M4D1D	46.2M	37.661M
802.11ax HEW80_Nss1,(MCS0)_1TX	80.52M	77.481M	77M5D1D	80.52M	77.481M
802.11ax HEW160_Nss1,(MCS0)_1TX	81.04M	78.681M	78M7D1D	81.04M	78.681M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	32.73M	18.411M	18M4D1D	19.44M	16.282M
802.11ax HEW20_Nss1,(MCS0)_1TX	30.33M	19.07M	19M1D1D	25.74M	18.741M
802.11ax HEW40_Nss1,(MCS0)_1TX	65.82M	38.801M	38M8D1D	39.78M	37.601M
802.11ax HEW80_Nss1,(MCS0)_1TX	80.52M	77.001M	77M0D1D	80.52M	77.001M
802.11ax HEW160_Nss1,(MCS0)_1TX	80.96M	78.201M	78M2D1D	80.96M	78.201M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	31.47M	18.411M	18M4D1D	19.5M	14.363M
802.11ax HEW20_Nss1,(MCS0)_1TX	31.8M	19.16M	19M2D1D	19.38M	14.438M
802.11ax HEW40_Nss1,(MCS0)_1TX	58.08M	38.681M	38M7D1D	39.72M	33.828M
802.11ax HEW80_Nss1,(MCS0)_1TX	89.25M	77.361M	77M4D1D	80.52M	73.388M
802.11ax HEW160_Nss1,(MCS0)_1TX	162M	155.202M	155MD1D	162M	155.202M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	15.03M	20.6M	20M6D1D	3.08M	11.294M
802.11ax HEW20_Nss1,(MCS0)_1TX	15.06M	20.63M	20M6D1D	3.38M	12.314M
802.11ax HEW40_Nss1,(MCS0)_1TX	33.72M	38.741M	38M7D1D	3.88M	22.409M
802.11ax HEW80_Nss1,(MCS0)_1TX	73.8M	83.598M	83M6D1D	3.8M	37.561M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-
5180MHz	Pass	Inf	34.98M	22.009M
5200MHz	Pass	Inf	34.83M	21.769M
5240MHz	Pass	Inf	32.19M	18.441M
5260MHz	Pass	Inf	31.35M	18.201M
5300MHz	Pass	Inf	32.73M	18.411M
5320MHz	Pass	Inf	19.44M	16.282M
5500MHz	Pass	Inf	26.13M	16.522M
5580MHz	Pass	Inf	31.47M	18.411M
5700MHz	Pass	Inf	19.5M	16.222M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	20.37M	14.363M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.08M	11.294M
5745MHz	Pass	500k	14.97M	19.37M
5785MHz	Pass	500k	15.03M	19.16M
5825MHz	Pass	500k	15M	20.6M
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	36.18M	22.069M
5200MHz	Pass	Inf	36.09M	21.499M
5240MHz	Pass	Inf	31.47M	19.22M
5260MHz	Pass	Inf	30.33M	19.04M
5300MHz	Pass	Inf	29.94M	19.07M
5320MHz	Pass	Inf	25.74M	18.741M
5500MHz	Pass	Inf	22.68M	18.681M
5580MHz	Pass	Inf	31.8M	19.16M
5700MHz	Pass	Inf	20.07M	18.621M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	19.38M	14.438M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.38M	12.314M
5745MHz	Pass	500k	15.06M	20.63M
5785MHz	Pass	500k	15.03M	20.15M
5825MHz	Pass	500k	15.06M	20.6M
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-
5190MHz	Pass	Inf	46.2M	37.661M
5230MHz	Pass	Inf	65.04M	38.381M
5270MHz	Pass	Inf	65.82M	38.801M
5310MHz	Pass	Inf	39.78M	37.601M
5510MHz	Pass	Inf	39.72M	37.481M
5550MHz	Pass	Inf	58.08M	38.681M
5670MHz	Pass	Inf	39.78M	37.541M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	39.725M	33.828M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.88M	22.409M
5755MHz	Pass	500k	33.72M	38.441M
5795MHz	Pass	500k	32.46M	38.741M
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-
5210MHz	Pass	Inf	80.52M	77.481M
5290MHz	Pass	Inf	80.52M	77.001M
5530MHz	Pass	Inf	80.52M	77.361M
5610MHz	Pass	Inf	80.52M	77.241M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	89.25M	73.388M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	3.8M	37.561M
5775MHz	Pass	500k	73.8M	83.598M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	81.04M	78.681M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	80.96M	78.201M
5570MHz	Pass	Inf	162M	155.202M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11a_Nss1,(6Mbps)_1TX EBW


5180MHz

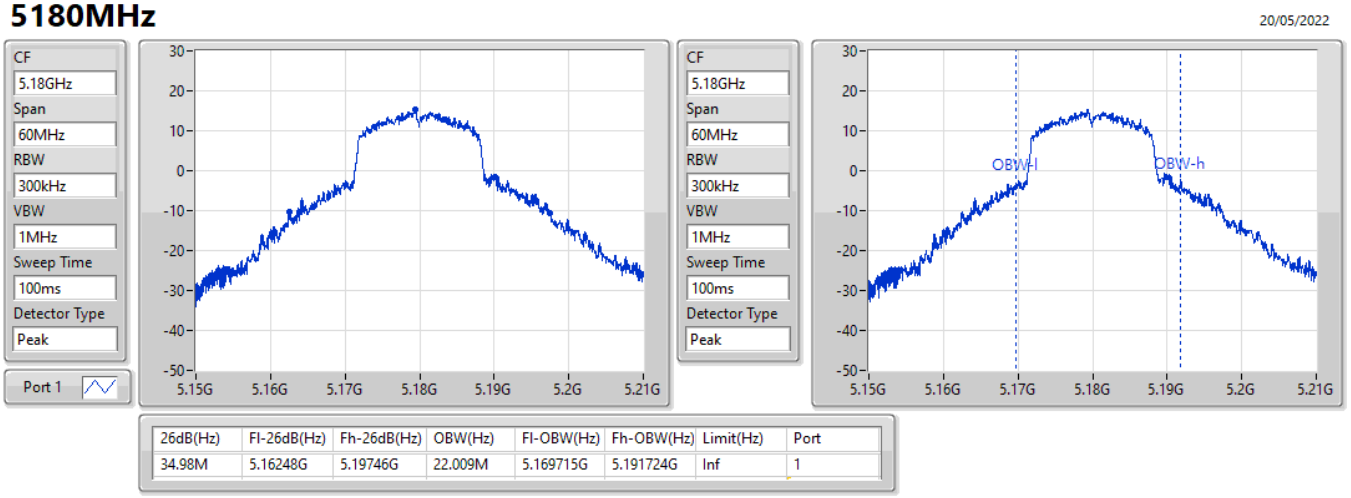

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
34.98M	5.16248G	5.19746G	22.009M	5.169715G	5.191724G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW


5200MHz

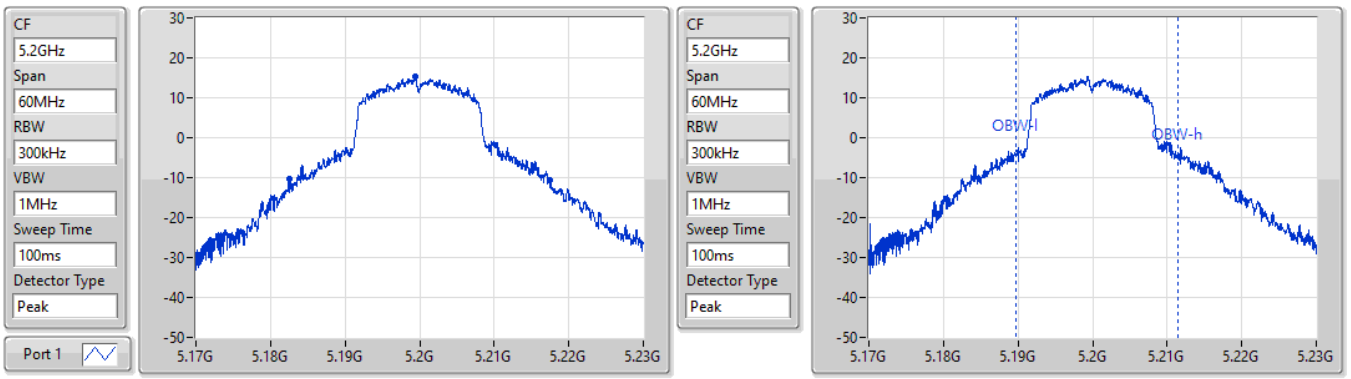

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
34.83M	5.18257G	5.2174G	21.769M	5.189715G	5.211484G	Inf	1

802.11a_Nss1,(6Mbps)_1TX **EBW**


5240MHz

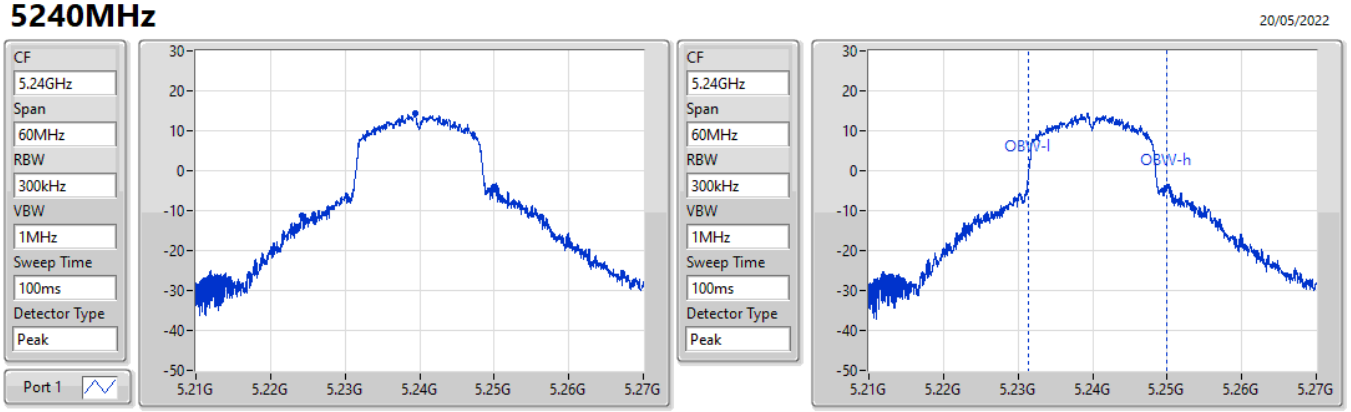

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
32.19M	5.22413G	5.25632G	18.441M	5.231454G	5.249895G	Inf	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5260MHz

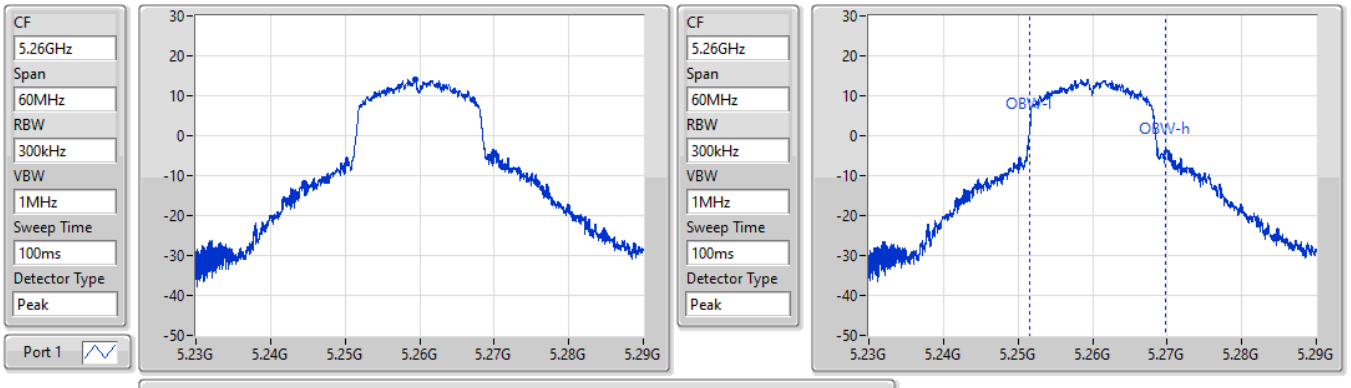


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.35M	5.24452G	5.27587G	18.201M	5.251544G	5.269745G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5300MHz

20/05/2022

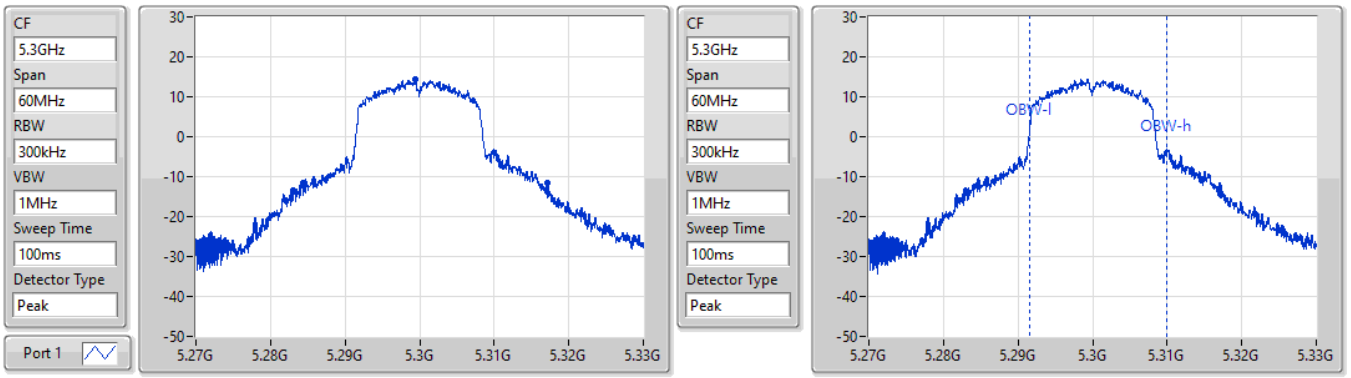


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
32.73M	5.2844G	5.31713G	18.411M	5.291514G	5.309925G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5320MHz

02/06/2022

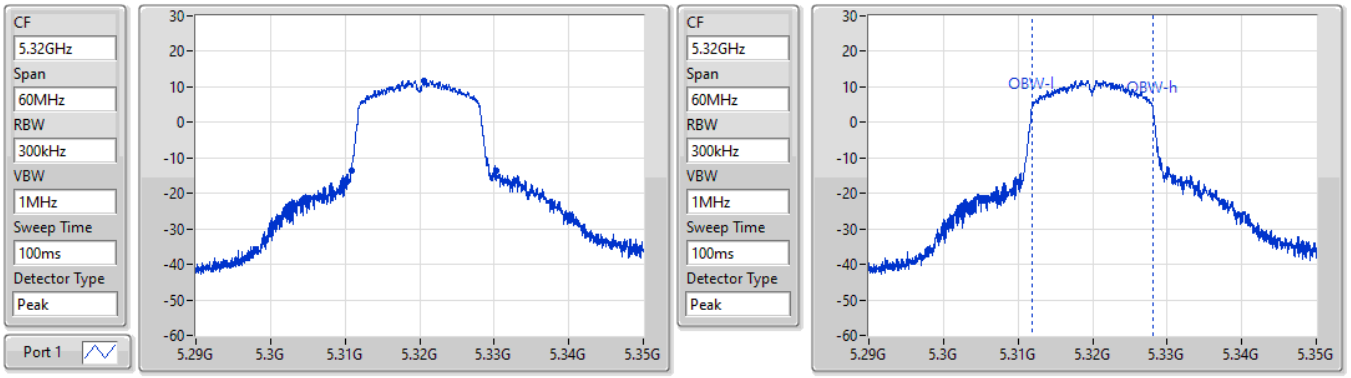


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.44M	5.31082G	5.33026G	16.282M	5.311844G	5.328126G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5500MHz

02/06/2022

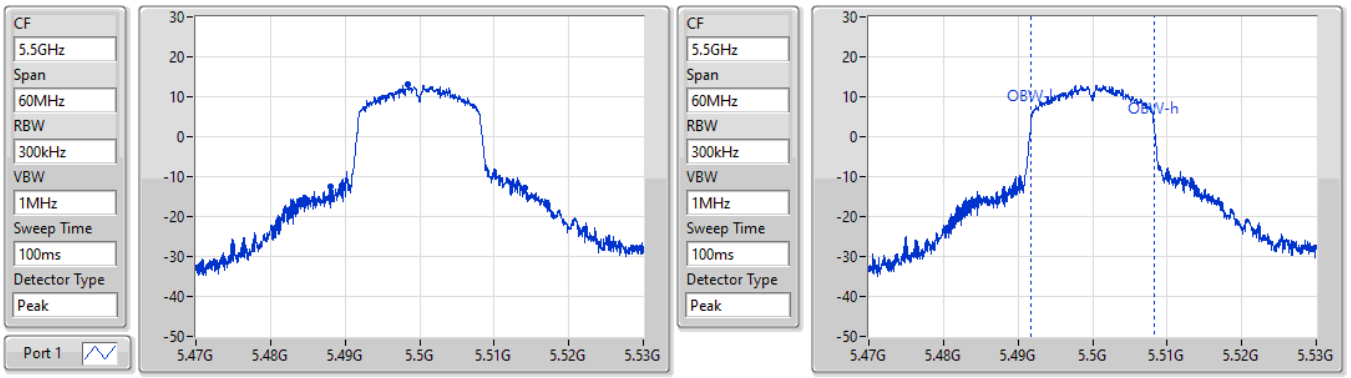


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
26.13M	5.48806G	5.51419G	16.522M	5.491784G	5.508306G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5580MHz

20/05/2022

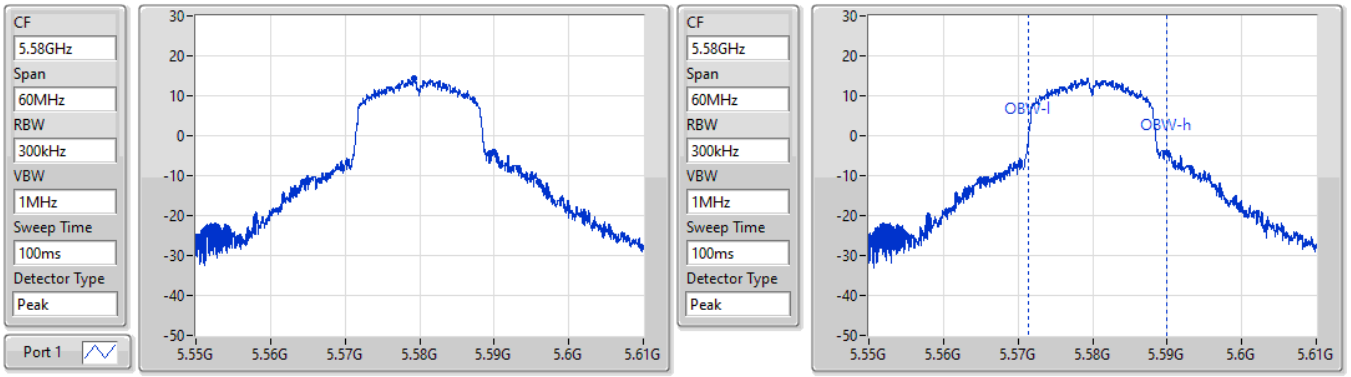


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.47M	5.56443G	5.5959G	18.411M	5.571454G	5.589865G	Inf	1

802.11a_Nss1,(6Mbps)_1TX

EBW

5700MHz

02/06/2022

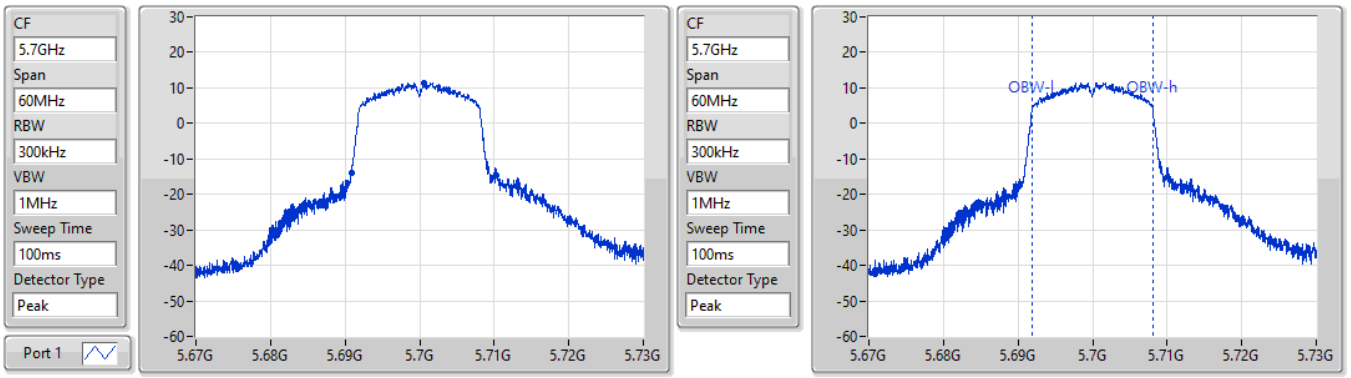


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.5M	5.69085G	5.71035G	16.222M	5.691874G	5.708096G	Inf	1

802.11a_Nss1,(6Mbps)_1TX

EBW

5720MHz Straddle 5.47-5.725GHz

02/06/2022

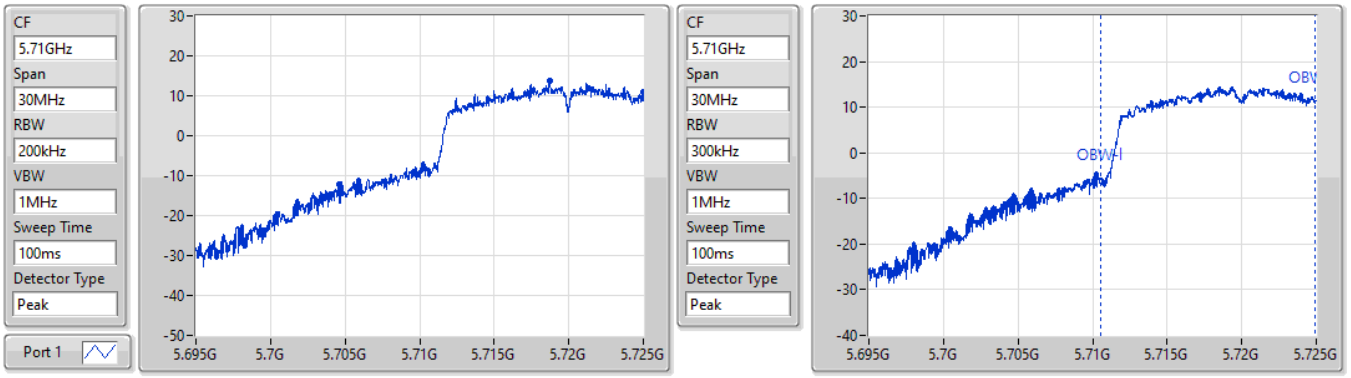


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.37M	5.70463G	5.725G	14.363M	5.710555G	5.724918G	Inf	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz

02/06/2022

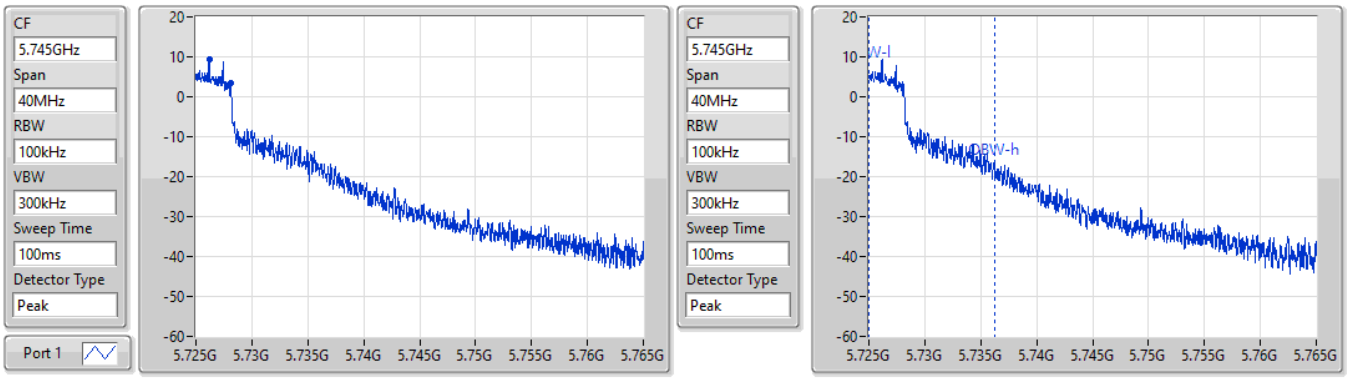


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.08M	5.725G	5.72808G	11.294M	5.72501G	5.736304G	500k	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz

02/06/2022

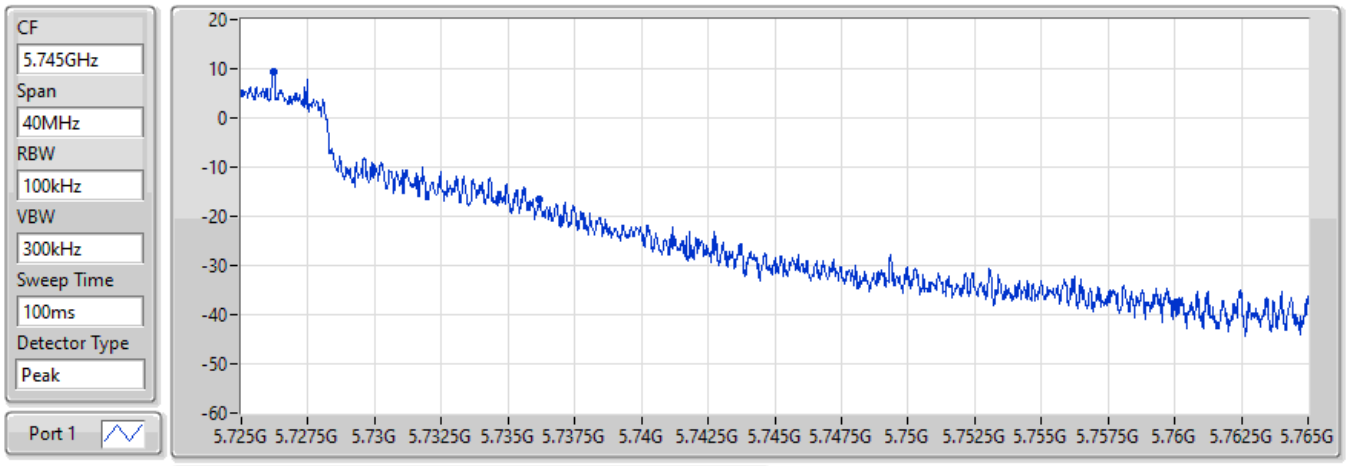


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
11.18M	5.725G	5.73618G	Inf	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5745MHz

02/06/2022

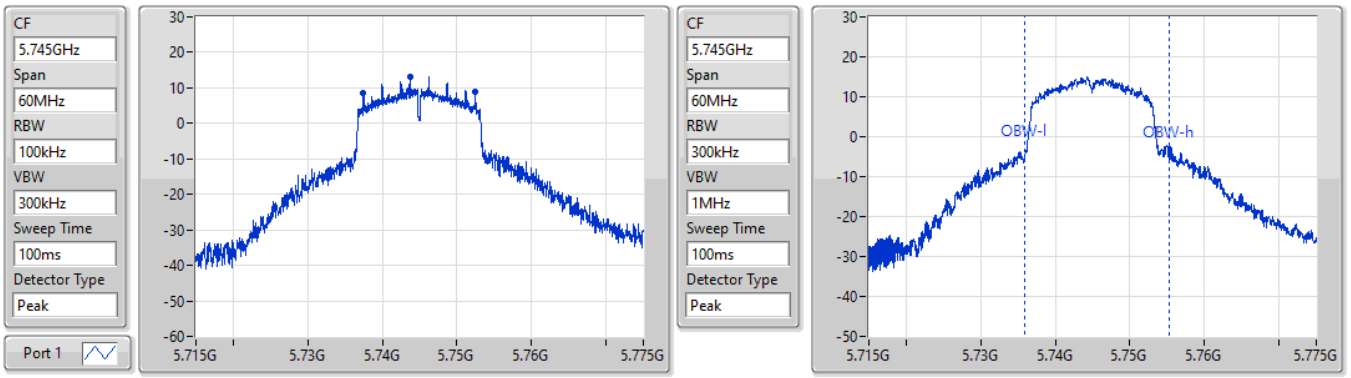


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.97M	5.73747G	5.75244G	19.37M	5.735975G	5.755345G	500k	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5745MHz

02/06/2022

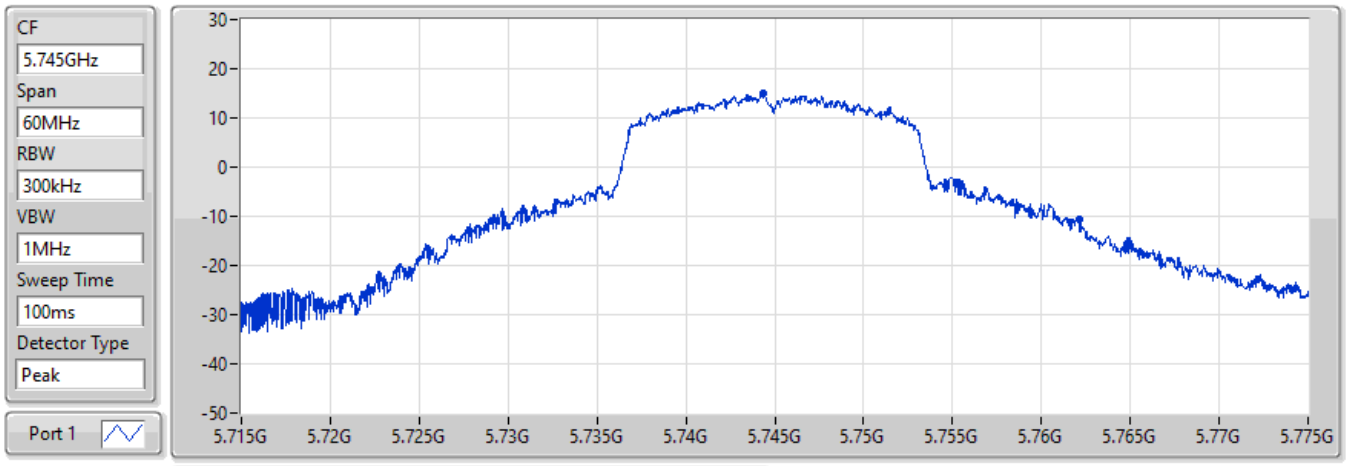


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
33.03M	5.72907G	5.7621G	Inf	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5785MHz

02/06/2022

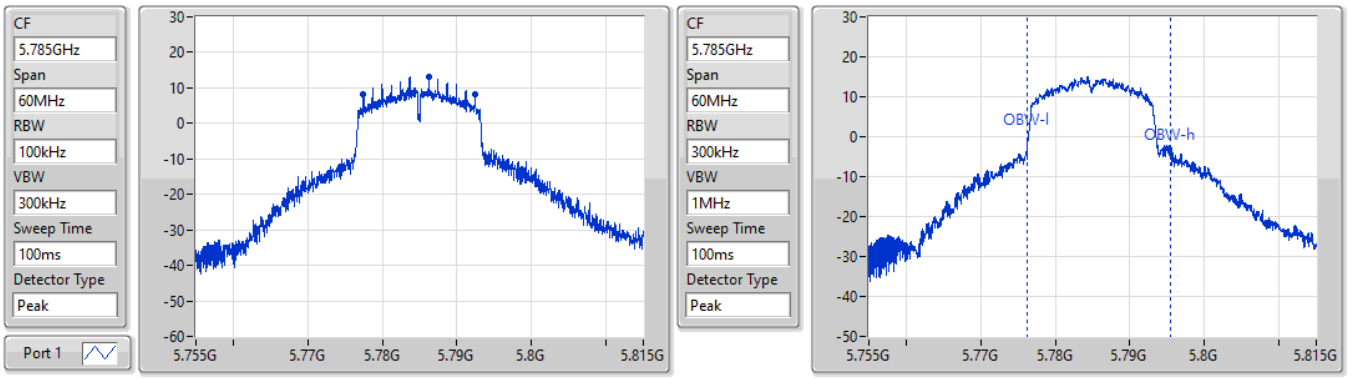


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.03M	5.77744G	5.79247G	19.16M	5.776274G	5.795435G	500k	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5785MHz

02/06/2022

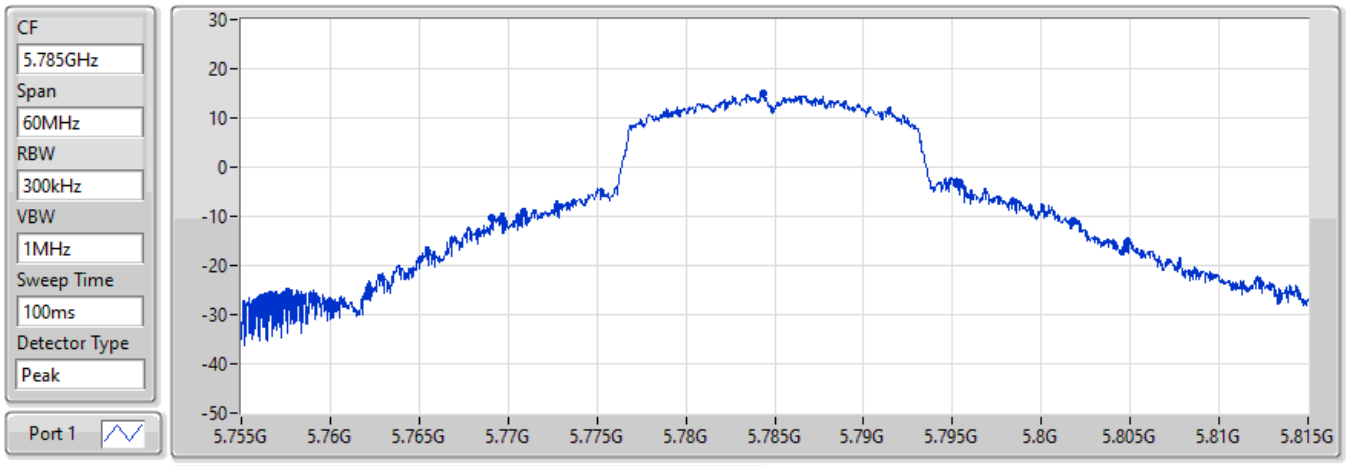


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
32.67M	5.7691G	5.80177G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5825MHz

02/06/2022

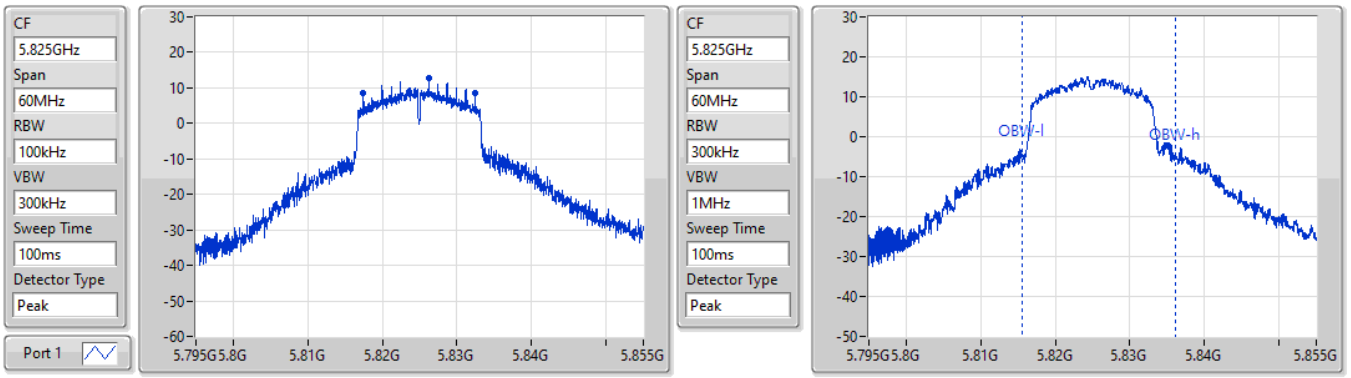


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15M	5.81747G	5.83247G	20.6M	5.815555G	5.836154G	500k	1

802.11a_Nss1,(6Mbps)_1TX EBW

5825MHz

02/06/2022

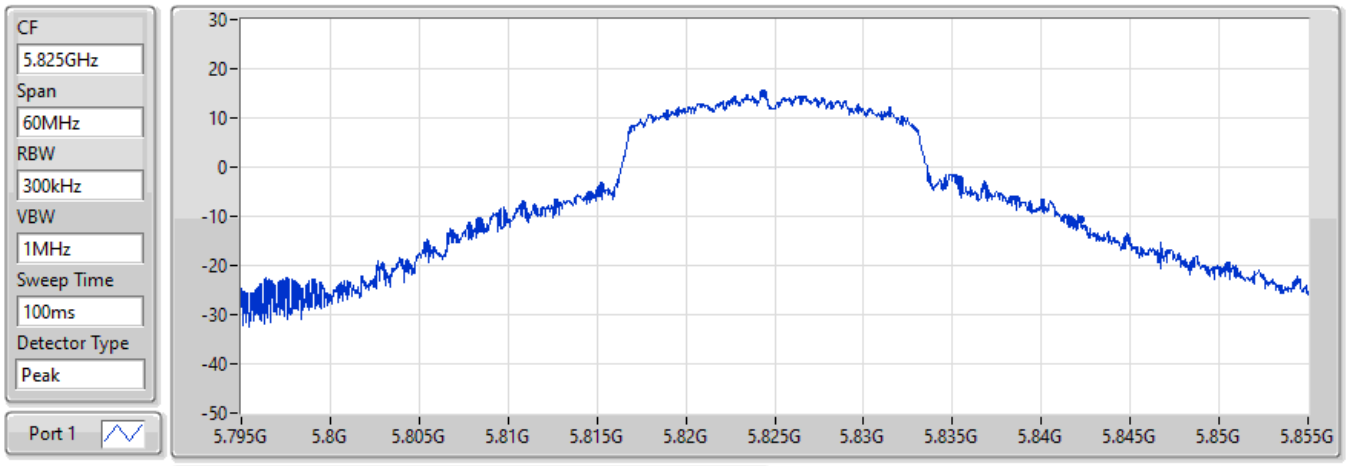


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
33.84M	5.80835G	5.84219G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5180MHz

20/05/2022

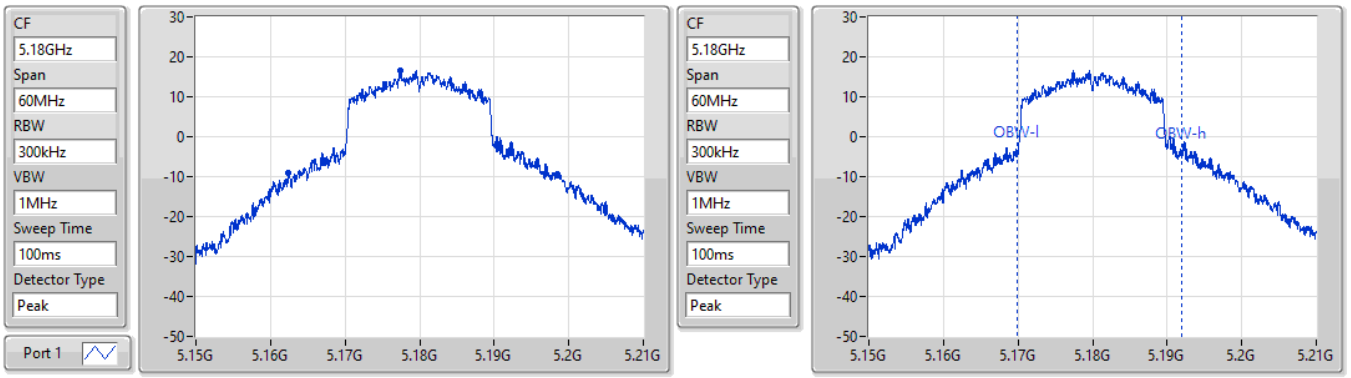


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
36.18M	5.16236G	5.19854G	22.069M	5.169865G	5.191934G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5200MHz

20/05/2022

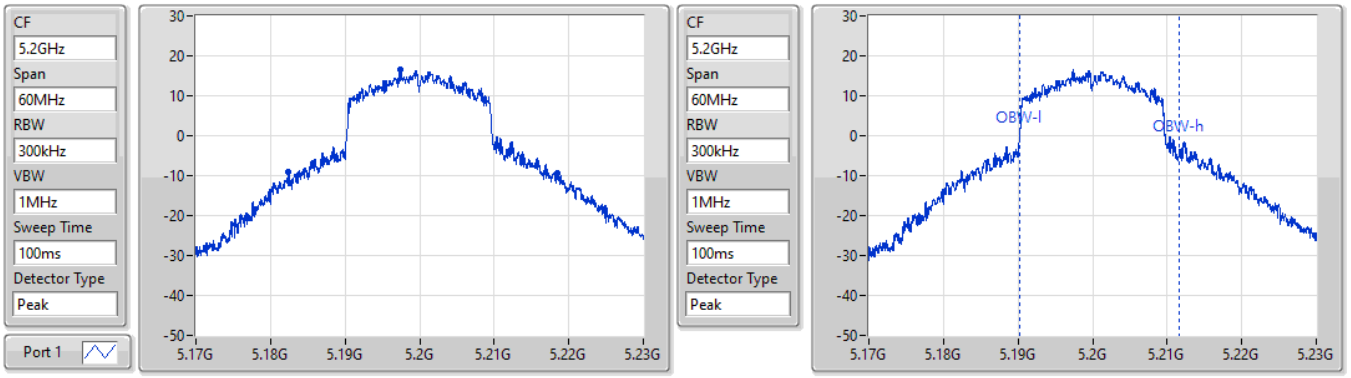


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
36.09M	5.18239G	5.21848G	21.499M	5.190165G	5.211664G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5240MHz

20/05/2022

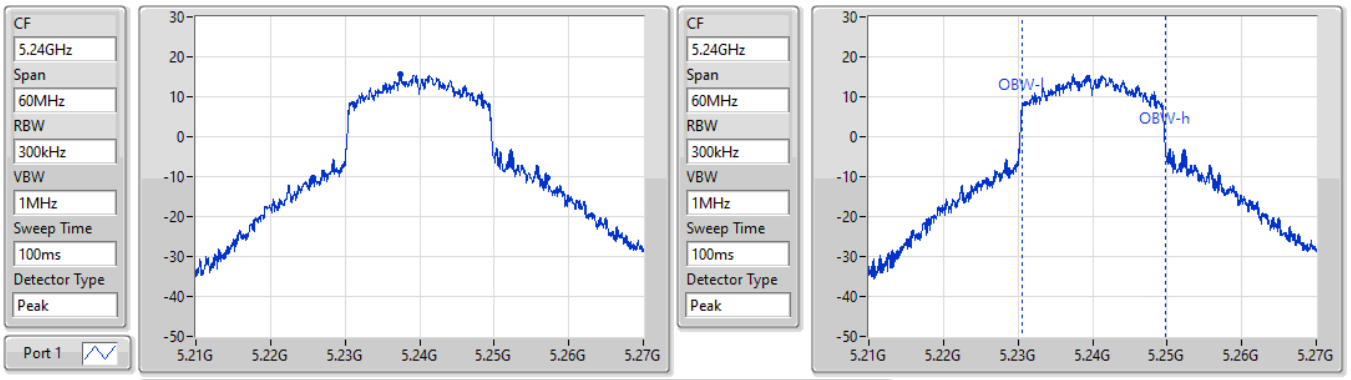


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.47M	5.22566G	5.25713G	19.22M	5.230495G	5.249715G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5260MHz

20/05/2022

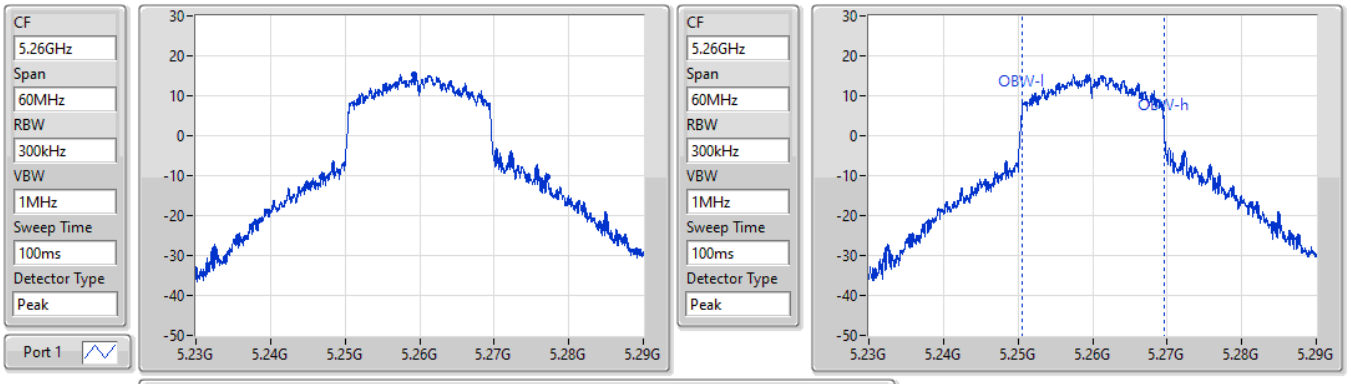


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
30.33M	5.2468G	5.27713G	19.04M	5.250555G	5.269595G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5300MHz

20/05/2022

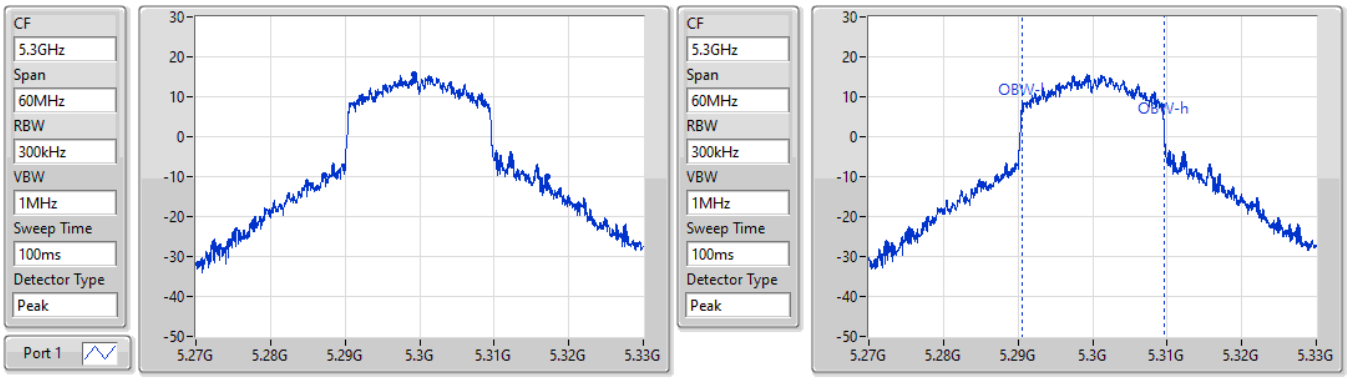


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
29.94M	5.28716G	5.3171G	19.07M	5.290525G	5.309595G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5320MHz

20/05/2022

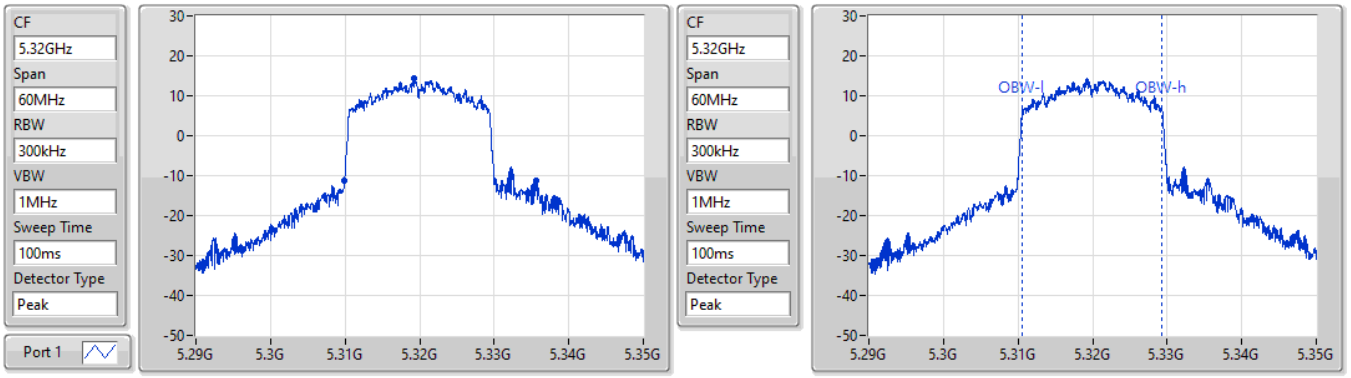


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
25.74M	5.30992G	5.33566G	18.741M	5.310615G	5.329355G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5500MHz

20/05/2022

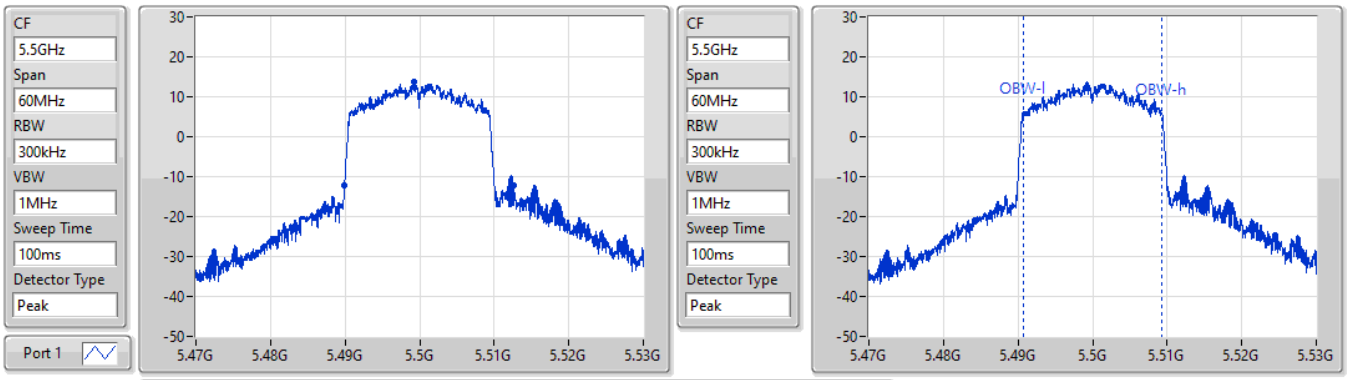


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.68M	5.48992G	5.5126G	18.681M	5.490645G	5.509325G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5580MHz

20/05/2022

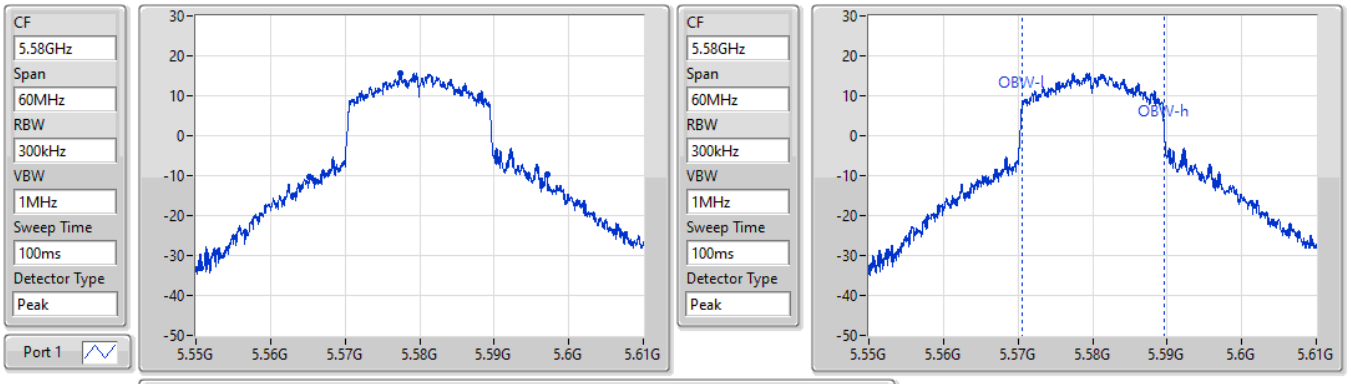


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.8M	5.56527G	5.59707G	19.16M	5.570495G	5.589655G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5700MHz

20/05/2022

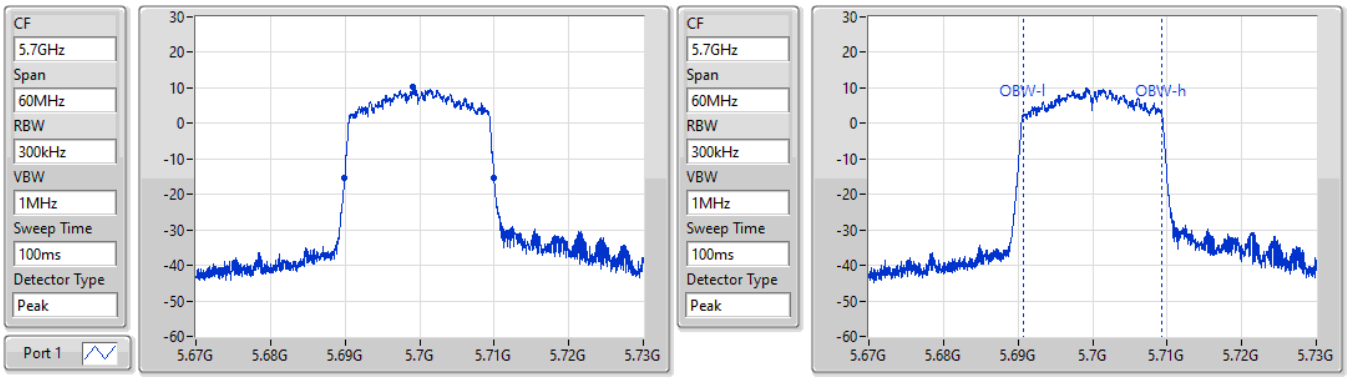


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.07M	5.68992G	5.70999G	18.621M	5.690645G	5.709265G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.47-5.725GHz

02/06/2022

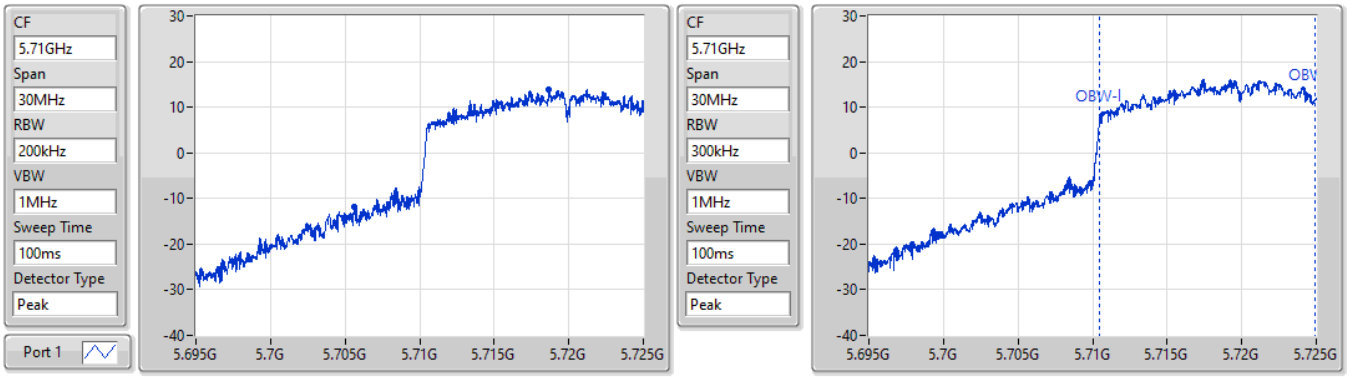


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.38M	5.70562G	5.725G	14.438M	5.710465G	5.724903G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.725-5.85GHz

02/06/2022

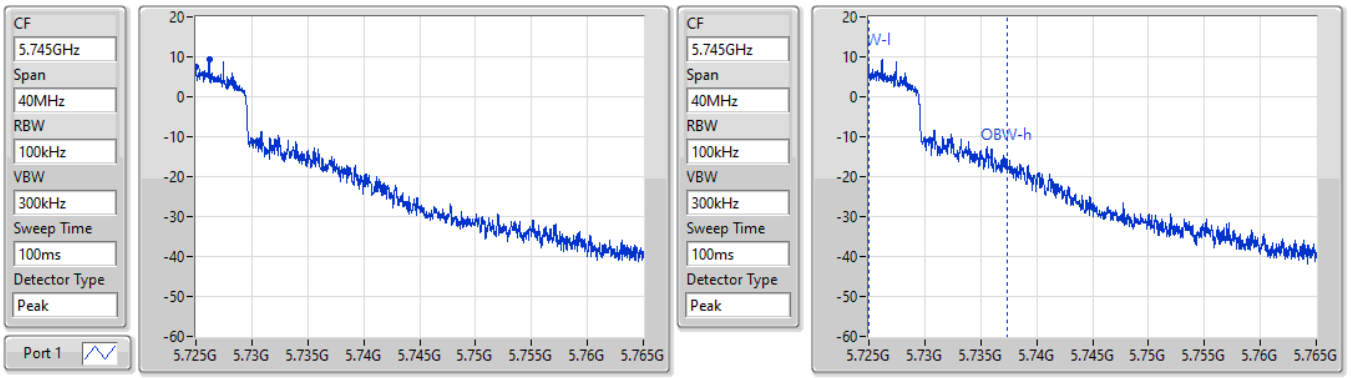


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.38M	5.725G	5.72838G	12.314M	5.72501G	5.737324G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.725-5.85GHz

02/06/2022

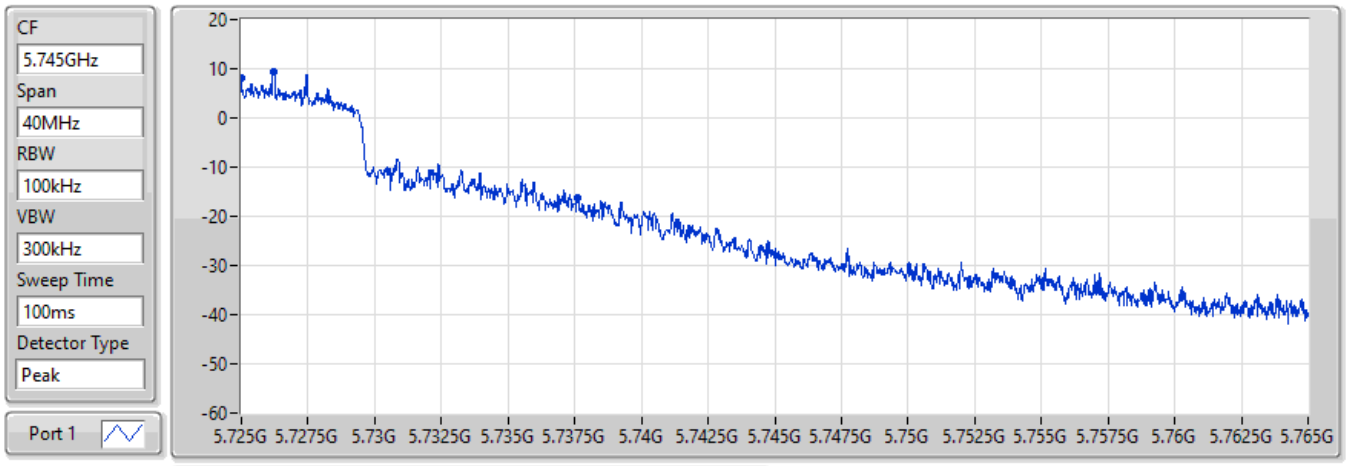


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
12.62M	5.725G	5.73762G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5745MHz

02/06/2022

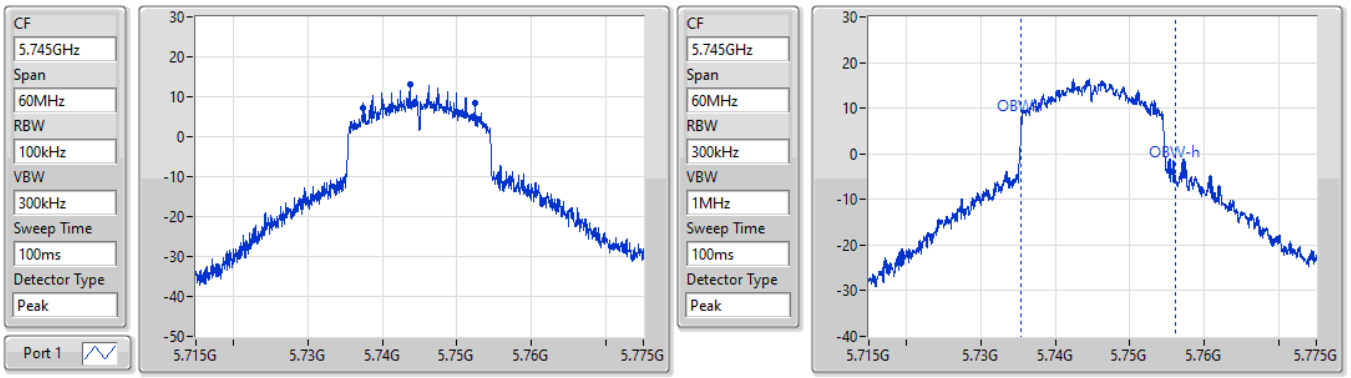


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.06M	5.73741G	5.75247G	20.63M	5.735405G	5.756034G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5745MHz

02/06/2022

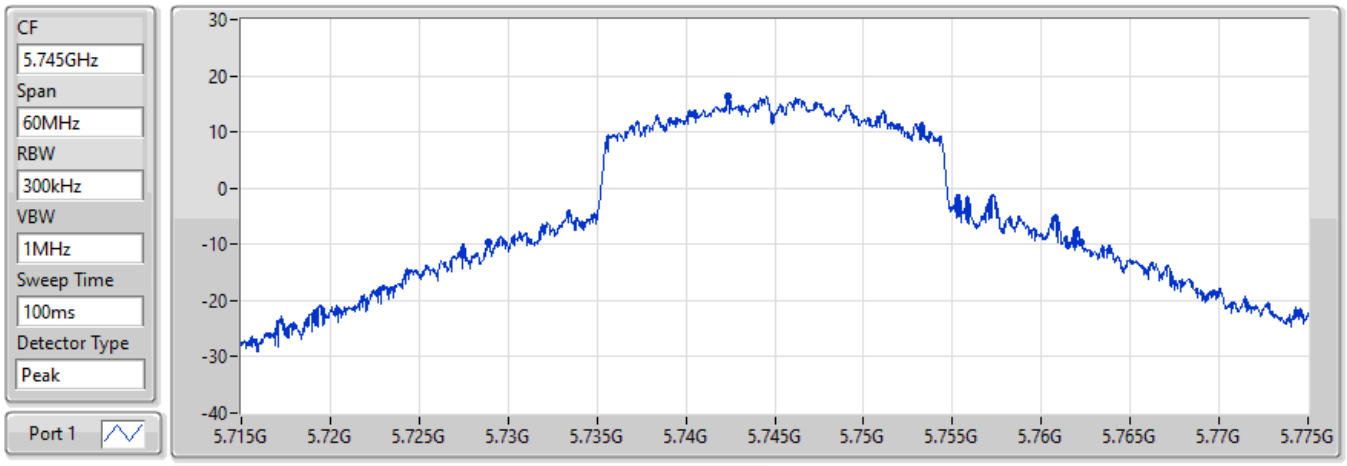


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
33.36M	5.72889G	5.76225G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5785MHz

02/06/2022

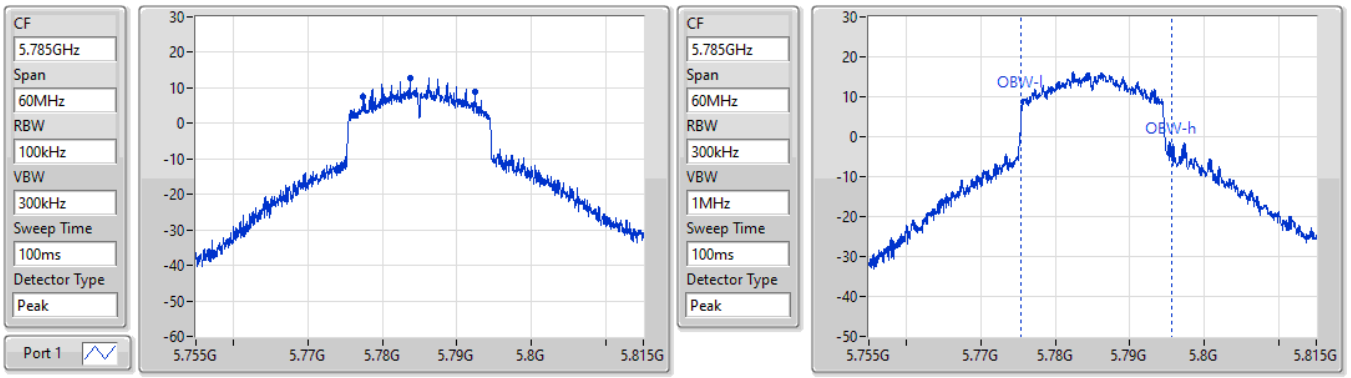


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.03M	5.77741G	5.79244G	20.15M	5.775465G	5.795615G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5785MHz

02/06/2022

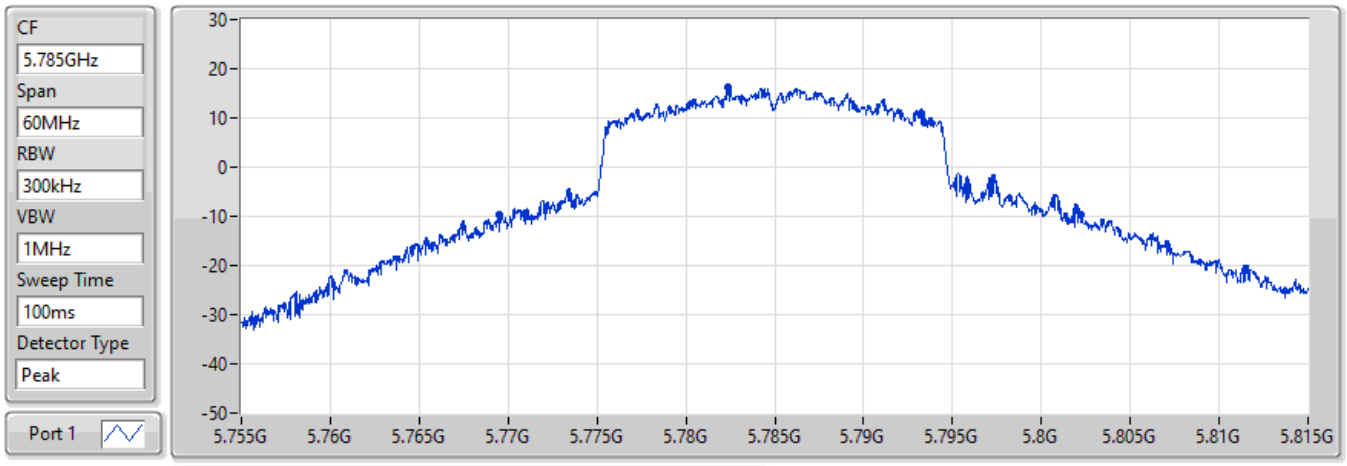


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
32.7M	5.76949G	5.80219G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5825MHz

02/06/2022

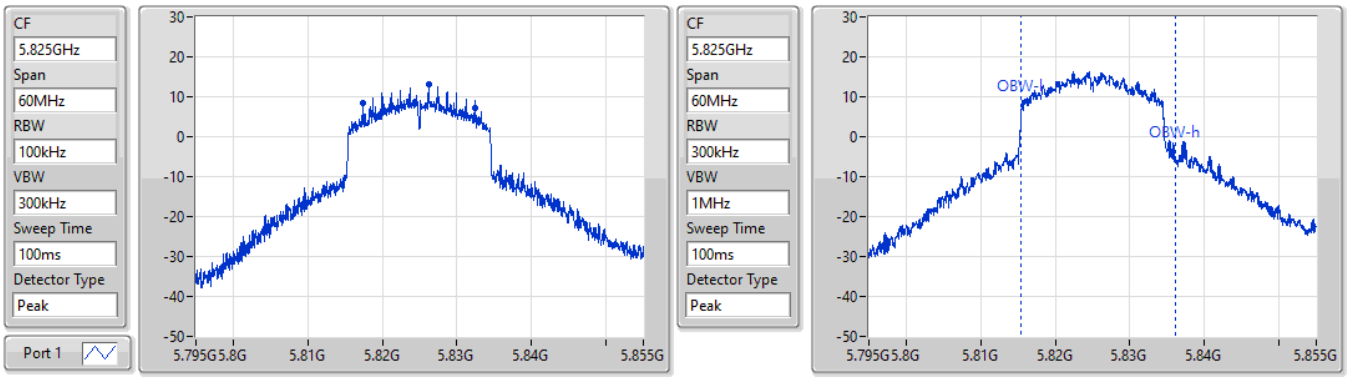


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.06M	5.81744G	5.8325G	20.6M	5.815435G	5.836034G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5825MHz

02/06/2022

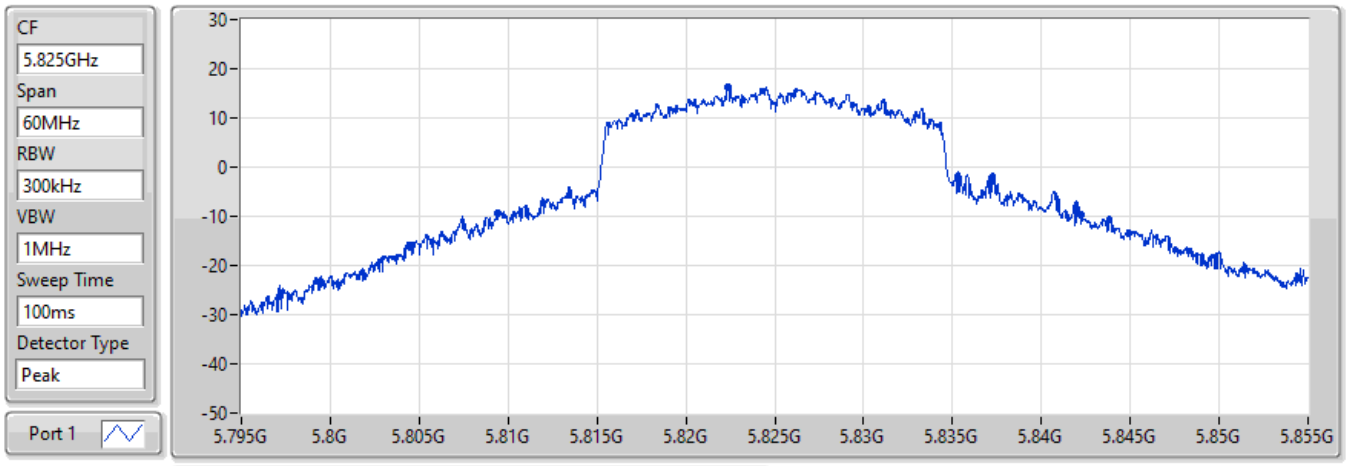


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
32.76M	5.80946G	5.84222G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5190MHz

02/06/2022

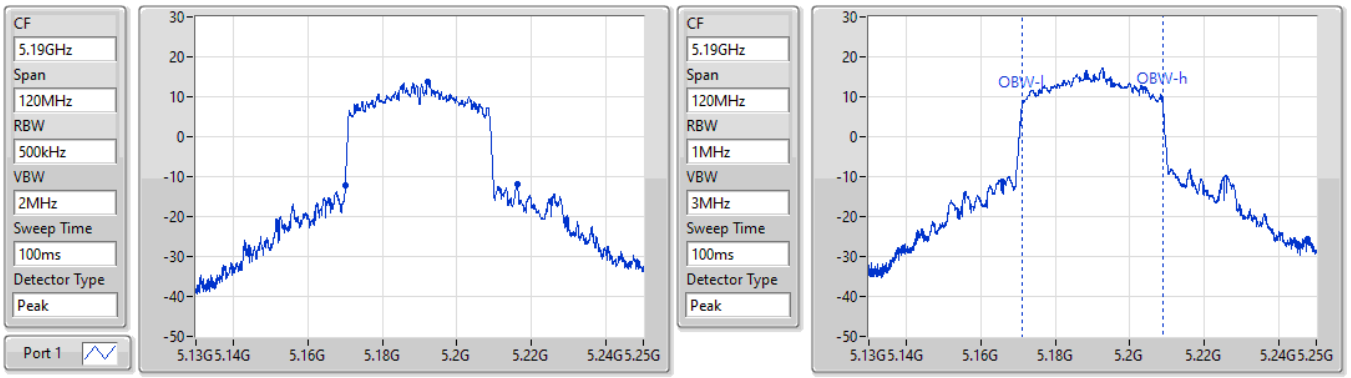


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
46.2M	5.17002G	5.21622G	37.661M	5.171109G	5.208771G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5230MHz

20/05/2022

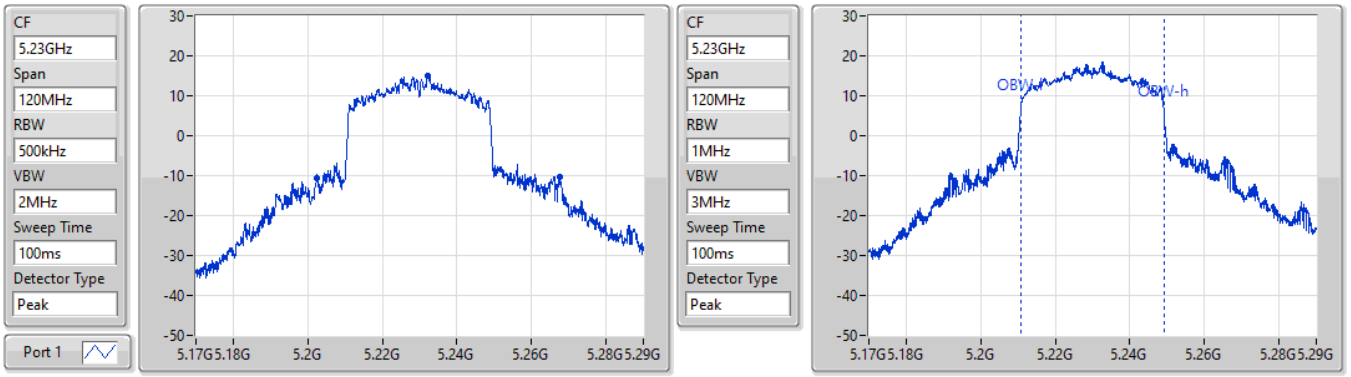


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
65.04M	5.20246G	5.2675G	38.381M	5.21087G	5.24925G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5270MHz

20/05/2022

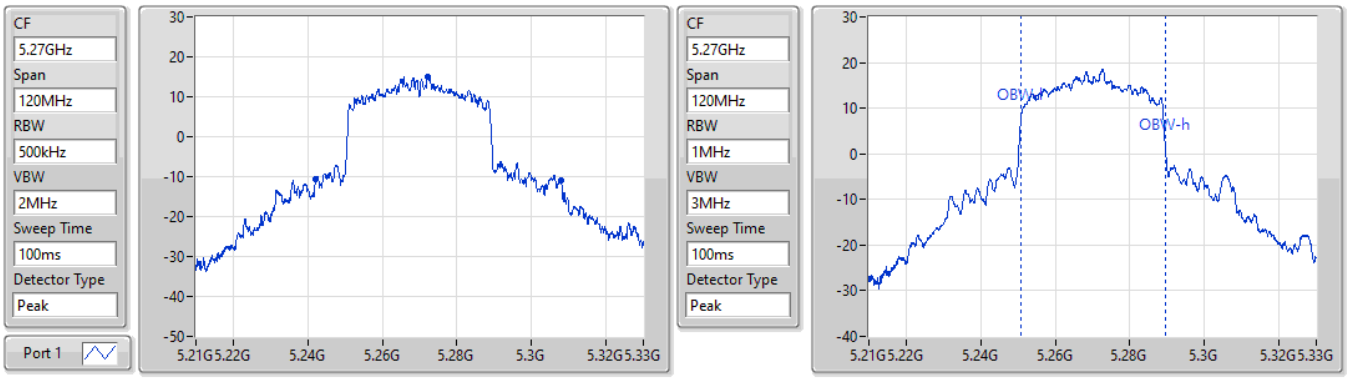


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
65.82M	5.24216G	5.30798G	38.801M	5.25075G	5.28955G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5310MHz

20/05/2022

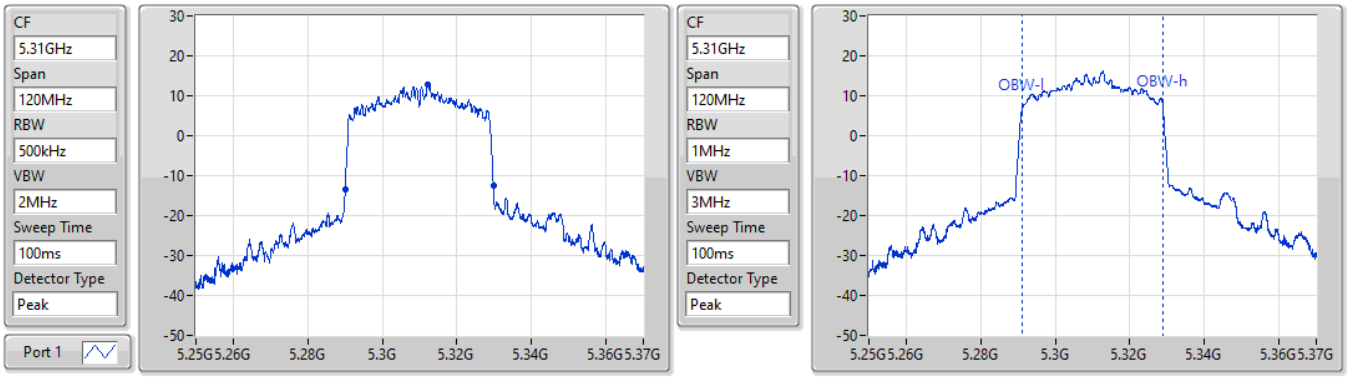


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.78M	5.29002G	5.3298G	37.601M	5.291169G	5.328771G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5510MHz

20/05/2022

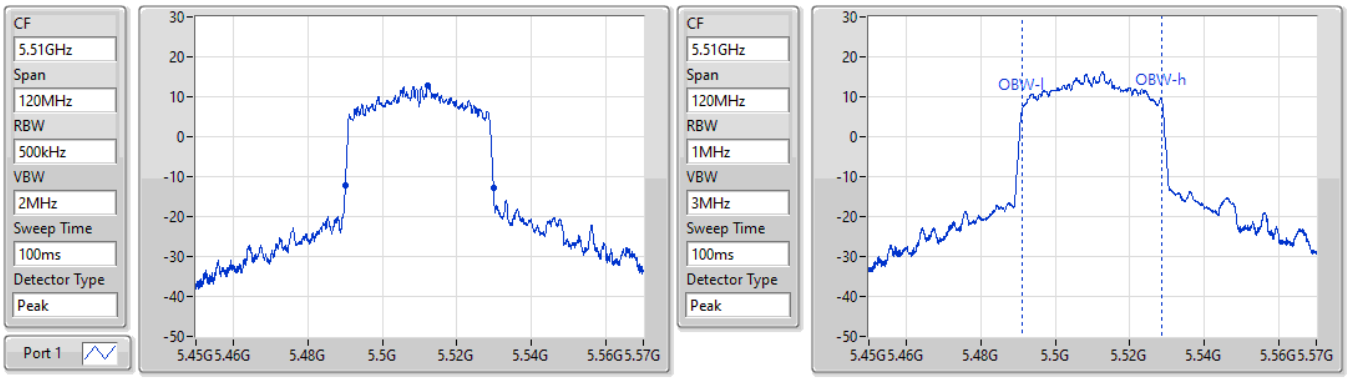


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.72M	5.49008G	5.5298G	37.481M	5.491229G	5.528711G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5550MHz

20/05/2022

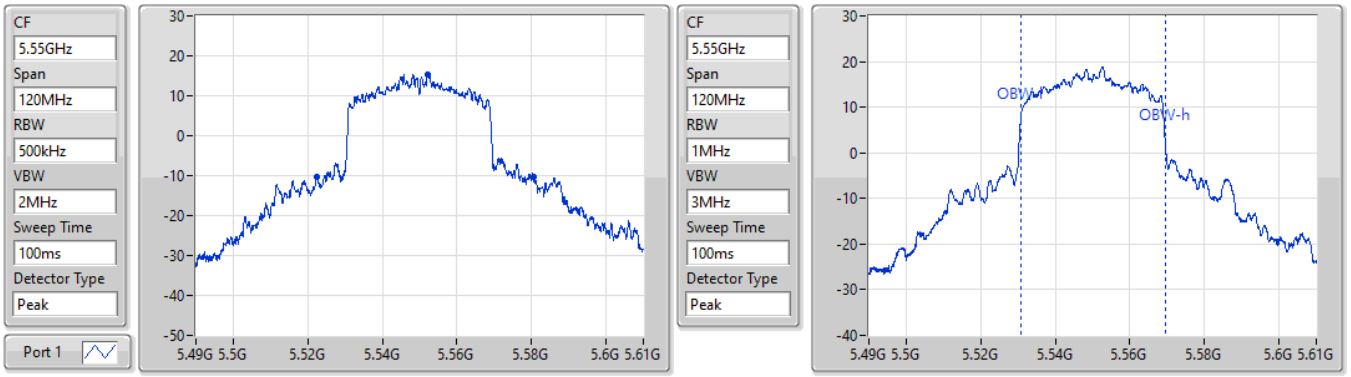


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
58.08M	5.52234G	5.58042G	38.681M	5.53075G	5.56943G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5670MHz

20/05/2022

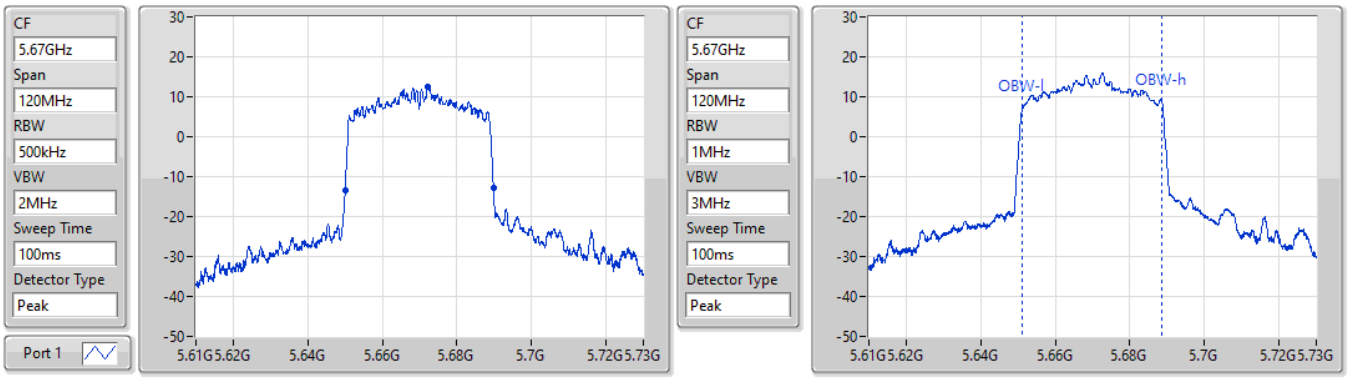


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.78M	5.65002G	5.6898G	37.541M	5.651169G	5.688711G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5710MHz Straddle 5.47-5.725GHz

02/06/2022

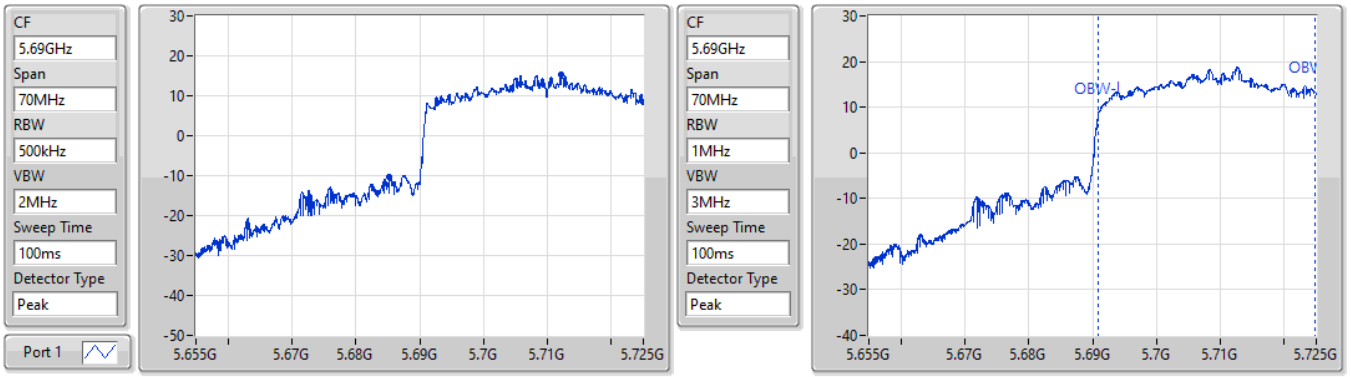


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.725M	5.685275G	5.725G	33.828M	5.69091G	5.724738G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5710MHz Straddle 5.725-5.85GHz

02/06/2022

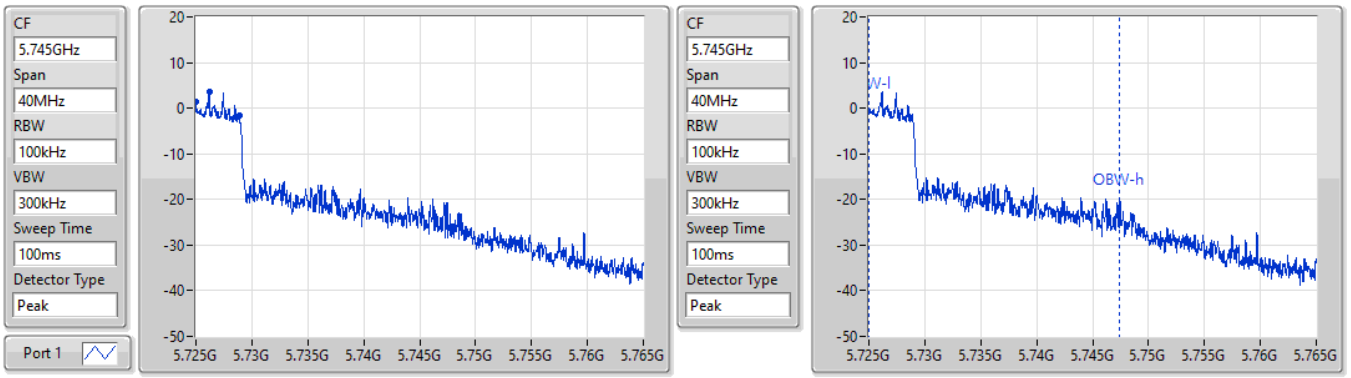


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.88M	5.725G	5.72888G	22.409M	5.72501G	5.747419G	500k	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5710MHz Straddle 5.725-5.85GHz

02/06/2022

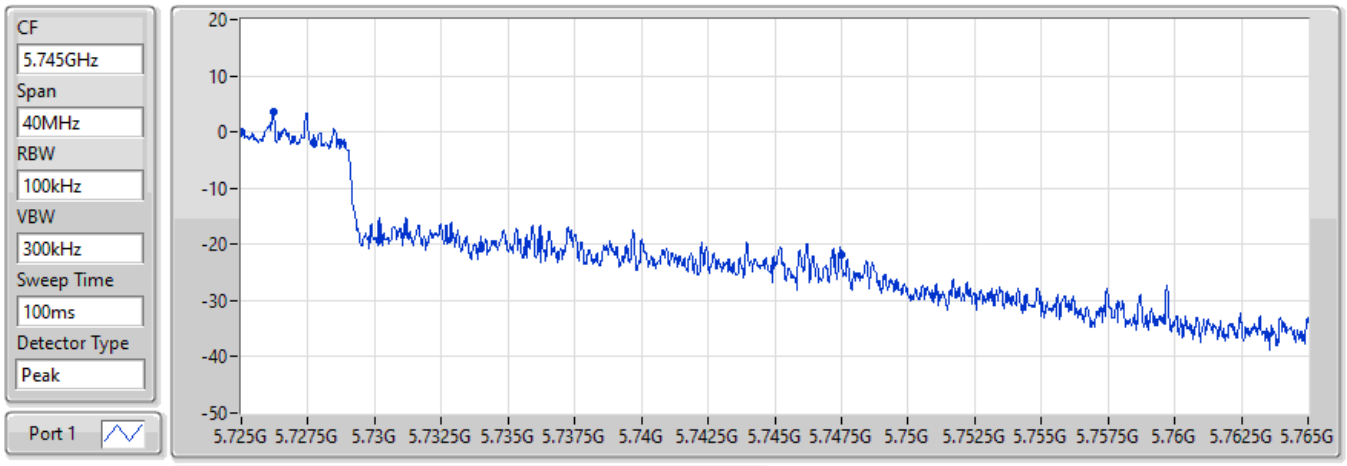


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
22.5M	5.725G	5.7475G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX **EBW**

5755MHz

02/06/2022

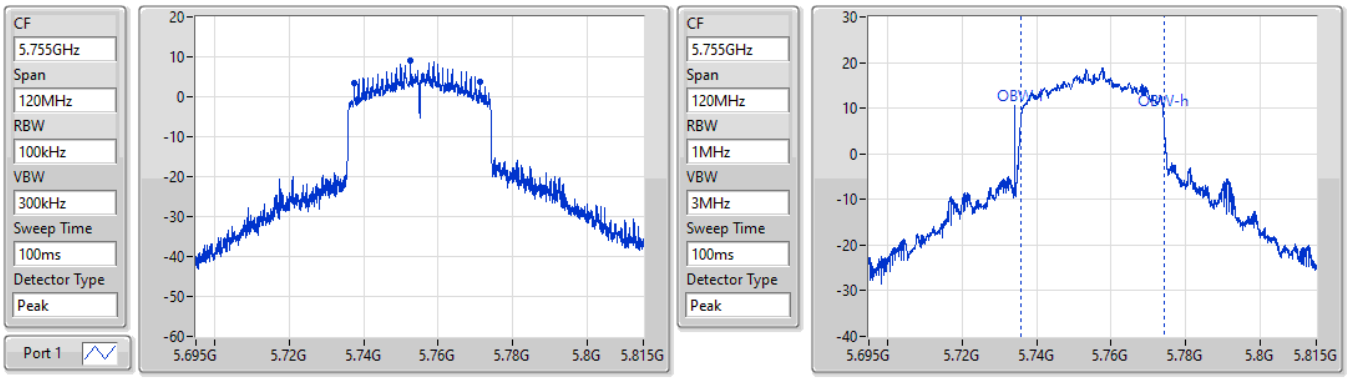


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
33.72M	5.73748G	5.7712G	38.441M	5.73569G	5.77413G	500k	1

802.11ax HEW40_Nss1,(MCS0)_1TX **EBW**

5755MHz

02/06/2022

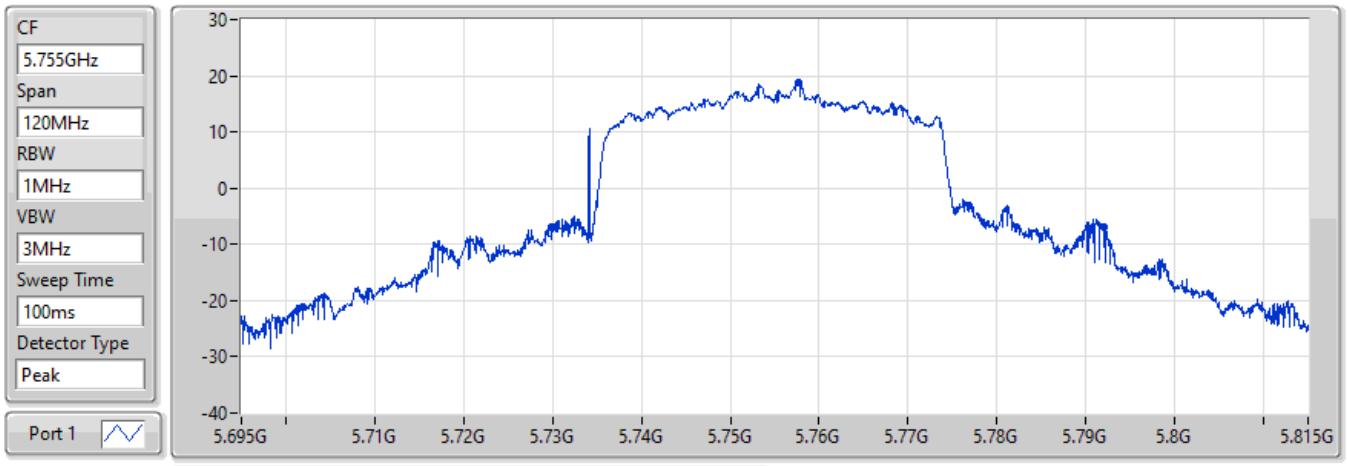


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
62.1M	5.72986G	5.79196G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5795MHz

02/06/2022

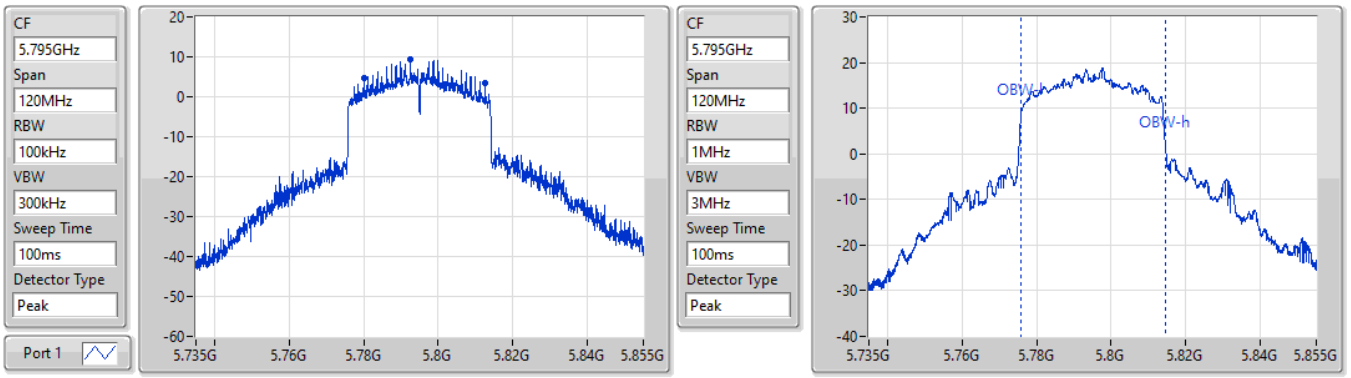


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
32.46M	5.78G	5.81246G	38.741M	5.77581G	5.81455G	500k	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5795MHz

02/06/2022

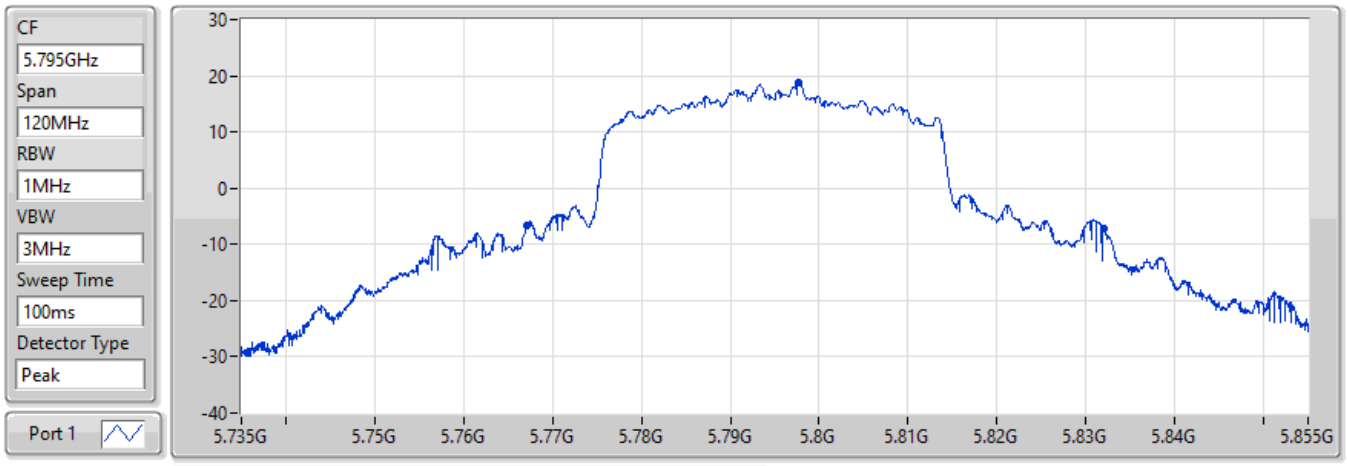


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
64.92M	5.76704G	5.83196G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5210MHz

20/05/2022

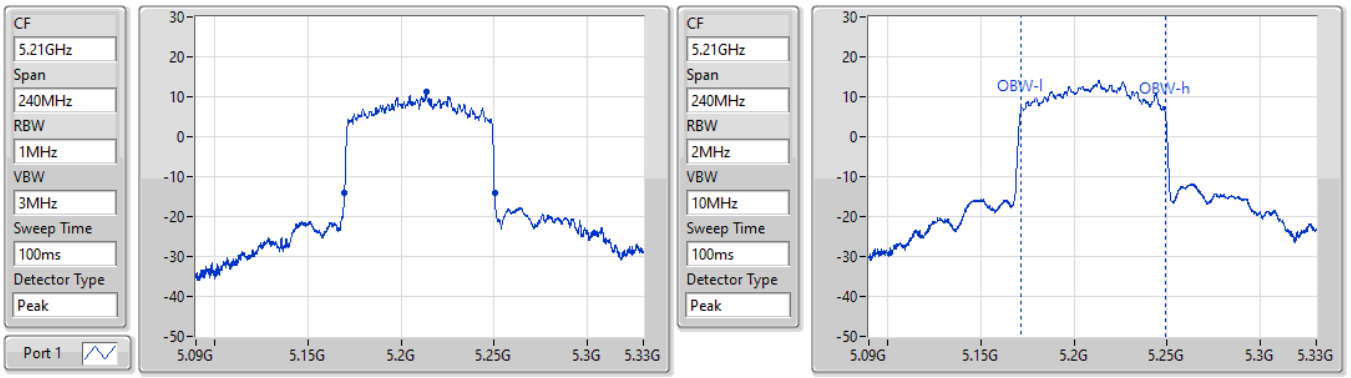


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.16968G	5.2502G	77.481M	5.171499G	5.248981G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5290MHz

02/06/2022

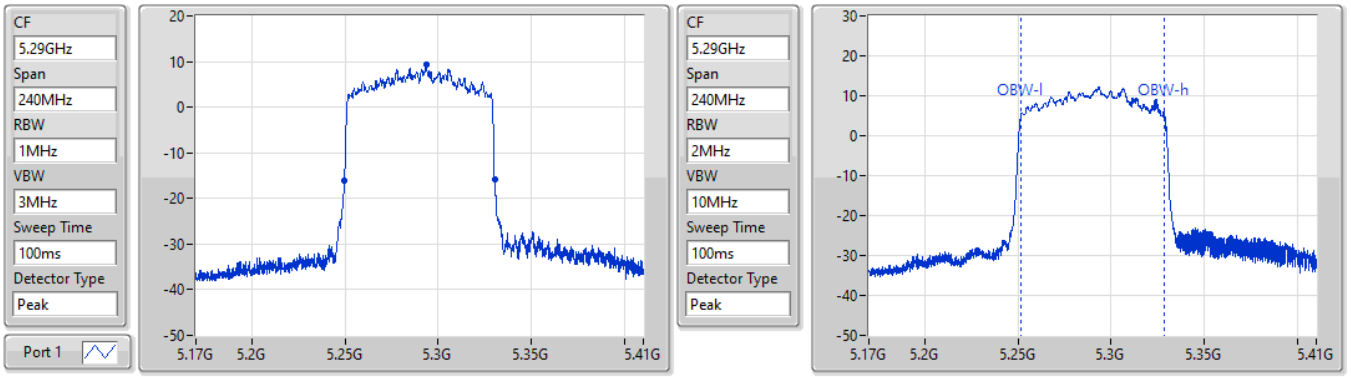


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.24968G	5.3302G	77.001M	5.251619G	5.328621G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5530MHz

20/05/2022

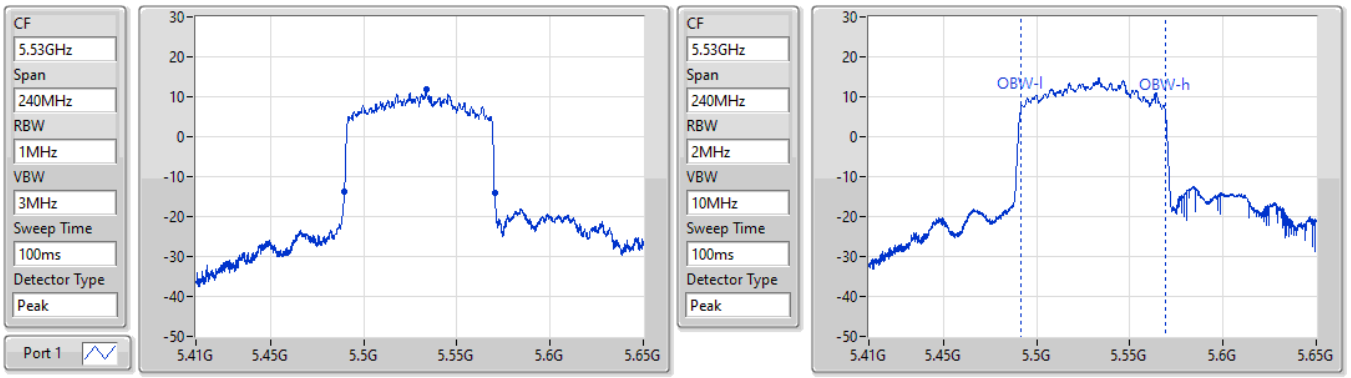


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.48968G	5.5702G	77.361M	5.491499G	5.568861G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5610MHz

20/05/2022

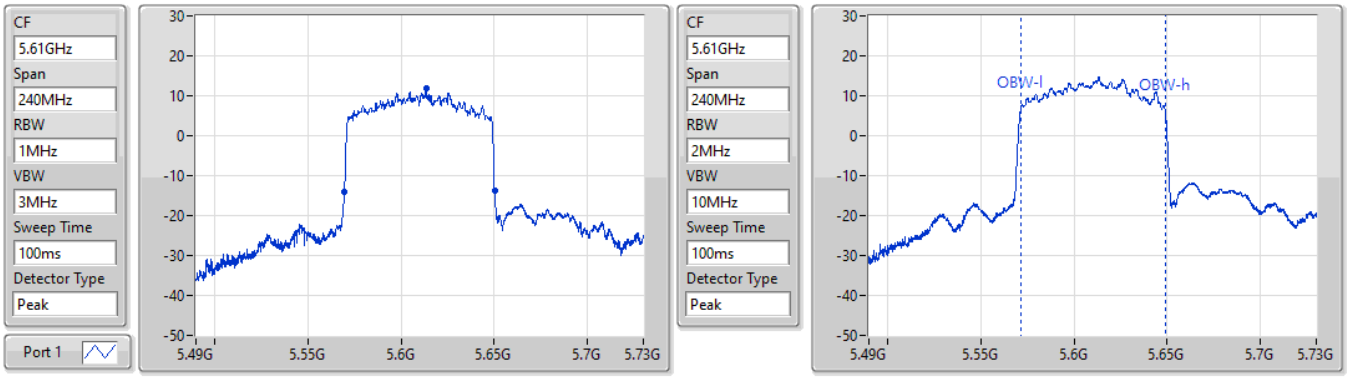


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.56968G	5.6502G	77.241M	5.571619G	5.648861G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX **EBW**

5690MHz Straddle 5.47-5.725GHz

02/06/2022

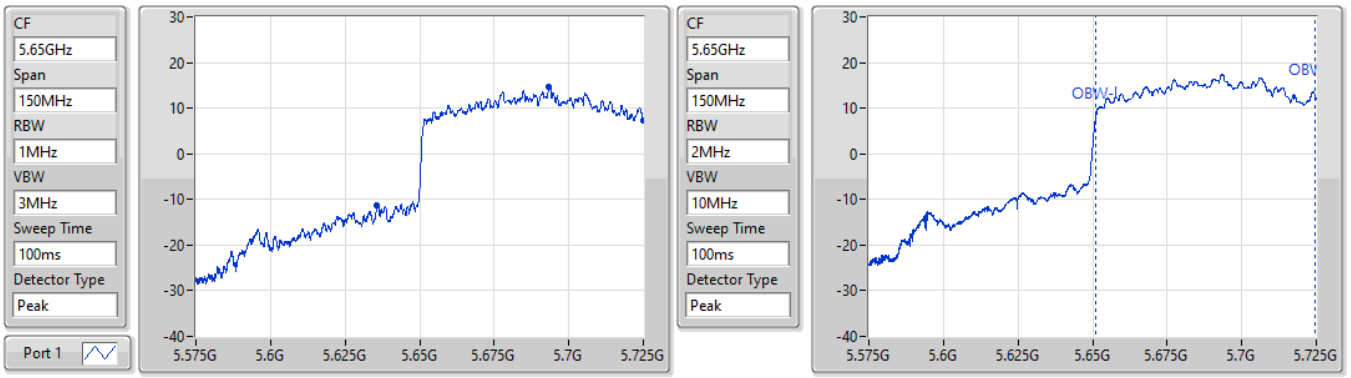


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
89.25M	5.63575G	5.725G	73.388M	5.651049G	5.724438G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX **EBW**

5690MHz Straddle 5.725-5.85GHz

02/06/2022

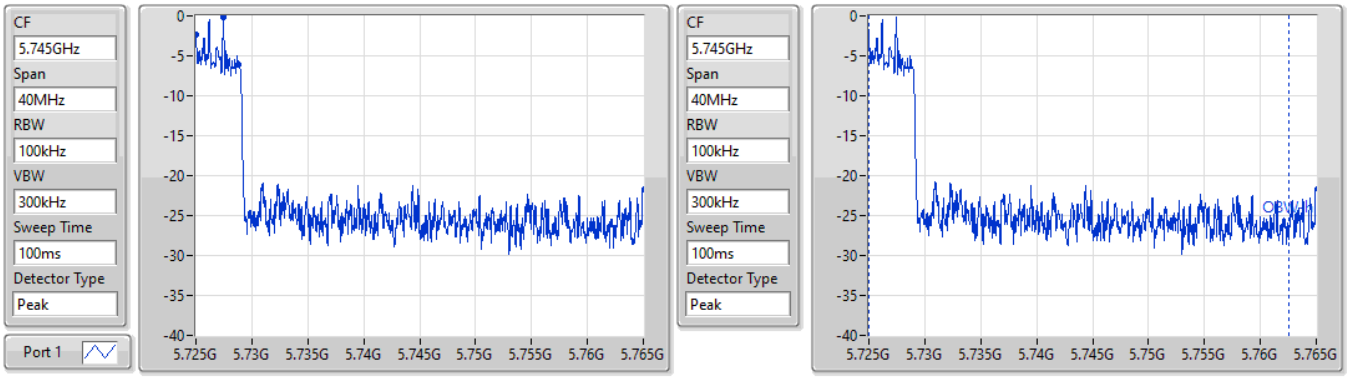


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.8M	5.725G	5.7288G	37.561M	5.72501G	5.762571G	500k	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5690MHz Straddle 5.725-5.85GHz

02/06/2022

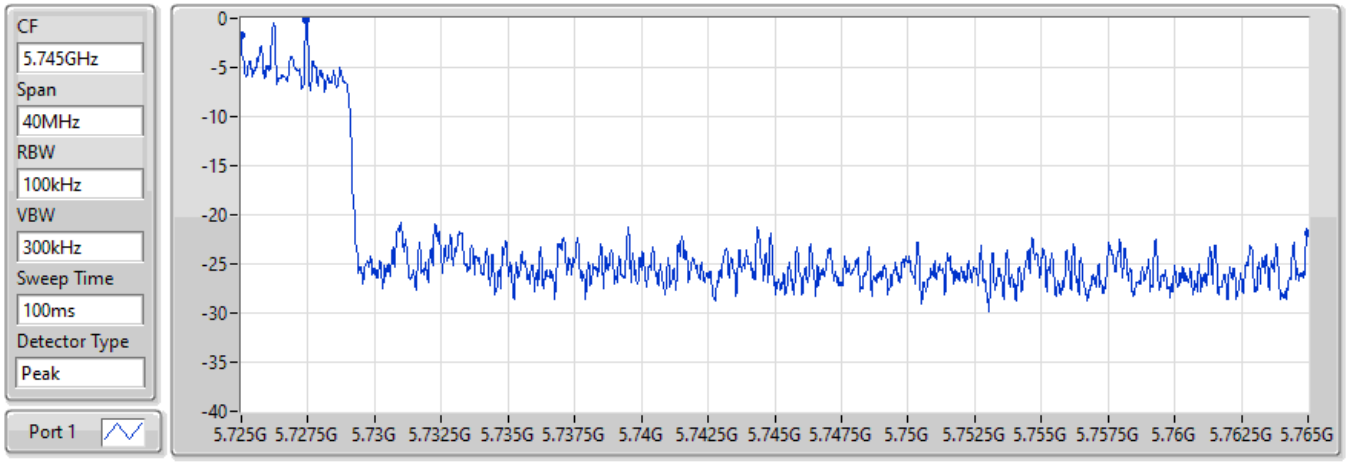


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
40M	5.725G	5.765G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5775MHz

02/06/2022

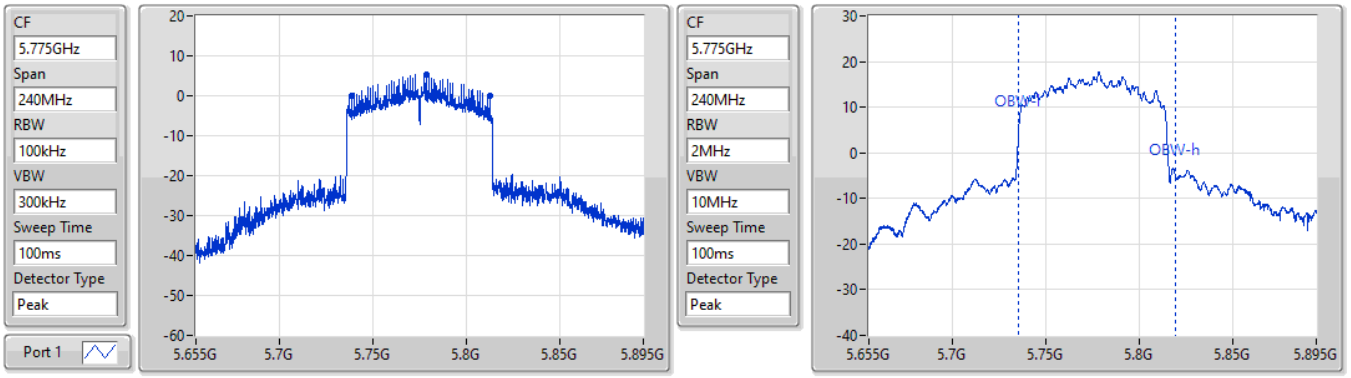


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
73.8M	5.73864G	5.81244G	83.598M	5.73554G	5.819138G	500k	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5775MHz

02/06/2022

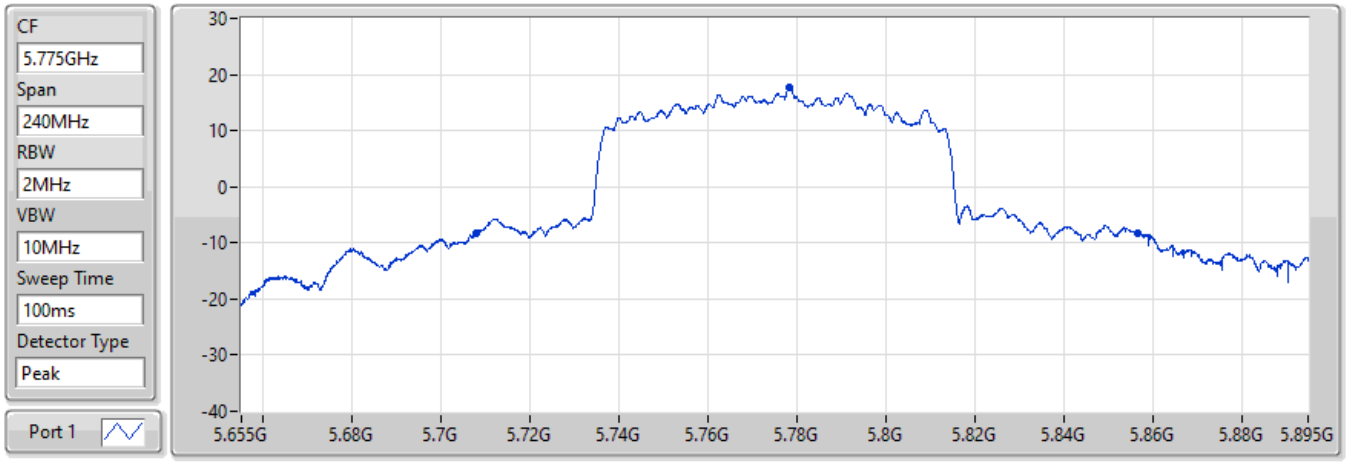


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
149.04M	5.7078G	5.85684G	Inf	1

802.11ax HEW160_Nss1,(MCS0)_1TX EBW

5250MHz Straddle 5.15-5.25GHz

02/06/2022

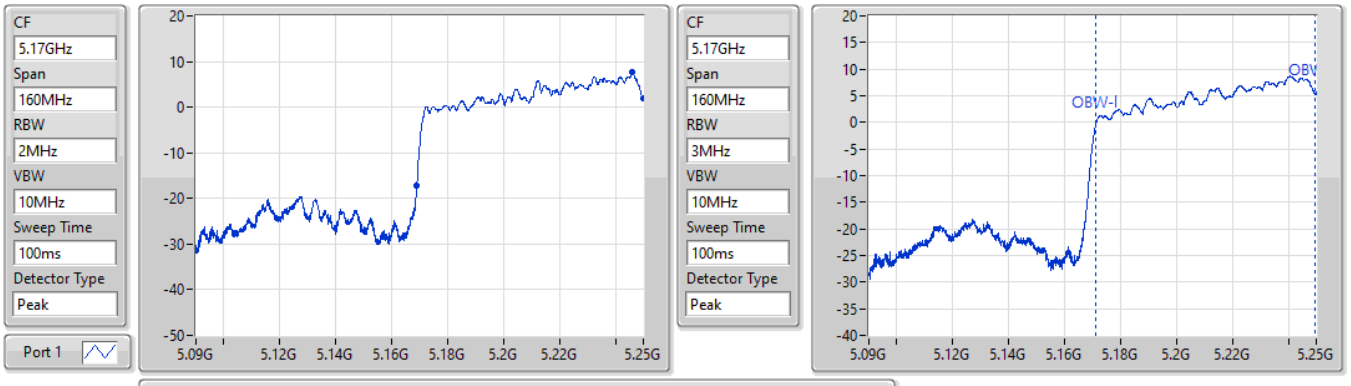


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
81.04M	5.16896G	5.25G	78.681M	5.17096G	5.24964G	Inf	1

802.11ax HEW160_Nss1,(MCS0)_1TX EBW

5250MHz Straddle 5.25-5.35GHz

02/06/2022

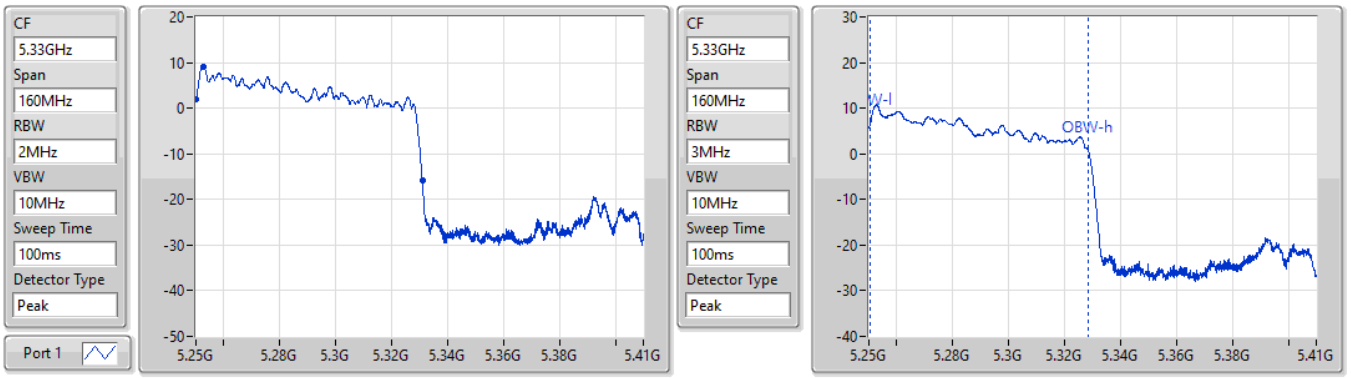


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.96M	5.25G	5.33096G	78.201M	5.25036G	5.328561G	Inf	1

802.11ax HEW160_Nss1,(MCS0)_1TX EBW

5570MHz

02/06/2022

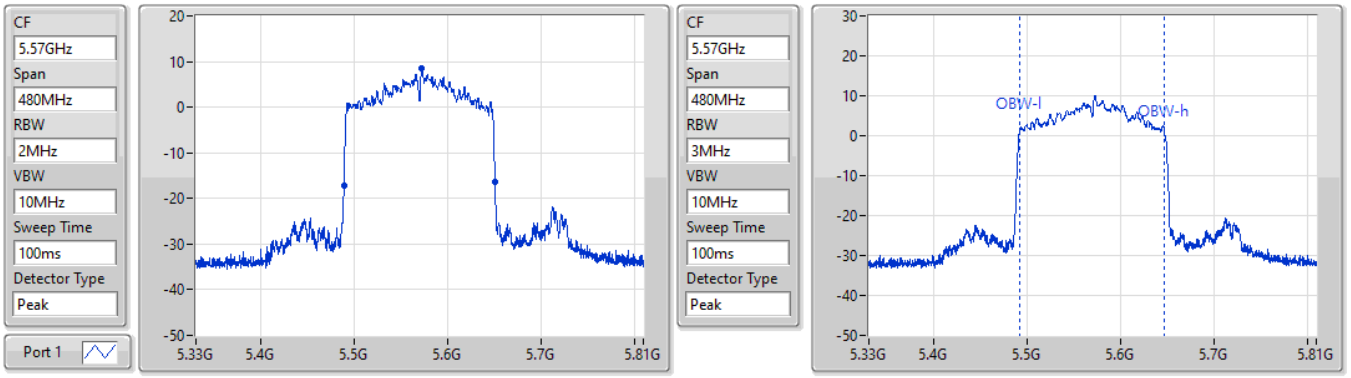

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
162M	5.48888G	5.65088G	155.202M	5.492039G	5.647241G	Inf	1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	35.01M	22.249M	22M2D1D	27.18M	16.642M
802.11ax HEW20_Nss1,(MCS0)_1TX	36.06M	21.319M	21M3D1D	22.68M	18.681M
802.11ax HEW40_Nss1,(MCS0)_1TX	64.02M	38.381M	38M4D1D	39.78M	37.601M
802.11ax HEW80_Nss1,(MCS0)_1TX	80.52M	77.121M	77M1D1D	80.52M	77.121M
802.11ax HEW160_Nss1,(MCS0)_1TX	81.12M	78.361M	78M4D1D	81.12M	78.361M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	31.65M	18.501M	18M5D1D	19.23M	16.222M
802.11ax HEW20_Nss1,(MCS0)_1TX	30.36M	19.25M	19M2D1D	20.07M	18.651M
802.11ax HEW40_Nss1,(MCS0)_1TX	61.32M	38.081M	38M1D1D	39.72M	37.481M
802.11ax HEW80_Nss1,(MCS0)_1TX	80.52M	77.001M	77M0D1D	80.52M	77.001M
802.11ax HEW160_Nss1,(MCS0)_1TX	81.04M	78.041M	78M0D1D	81.04M	78.041M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	32.73M	18.561M	18M6D1D	18.36M	14.363M
802.11ax HEW20_Nss1,(MCS0)_1TX	31.83M	19.28M	19M3D1D	19.695M	14.498M
802.11ax HEW40_Nss1,(MCS0)_1TX	43.26M	37.721M	37M7D1D	39.72M	34.003M
802.11ax HEW80_Nss1,(MCS0)_1TX	80.52M	77.481M	77M5D1D	76.2M	73.388M
802.11ax HEW160_Nss1,(MCS0)_1TX	162M	154.963M	155MD1D	162M	154.963M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	15.06M	20.99M	21M0D1D	3.1M	11.554M
802.11ax HEW20_Nss1,(MCS0)_1TX	15.09M	20.84M	20M8D1D	3.42M	12.054M
802.11ax HEW40_Nss1,(MCS0)_1TX	35.04M	38.801M	38M8D1D	3.9M	22.249M
802.11ax HEW80_Nss1,(MCS0)_1TX	75M	77.601M	77M6D1D	3.86M	37.901M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-
5180MHz	Pass	Inf	27.18M	16.642M
5200MHz	Pass	Inf	35.01M	22.249M
5240MHz	Pass	Inf	31.62M	18.351M
5260MHz	Pass	Inf	31.32M	18.501M
5300MHz	Pass	Inf	31.65M	17.721M
5320MHz	Pass	Inf	19.23M	16.222M
5500MHz	Pass	Inf	22.98M	16.312M
5580MHz	Pass	Inf	32.73M	18.561M
5700MHz	Pass	Inf	18.36M	16.162M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	20.385M	14.363M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.1M	11.554M
5745MHz	Pass	500k	15.06M	20.84M
5785MHz	Pass	500k	15.06M	20.81M
5825MHz	Pass	500k	15.06M	20.99M
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	22.68M	18.681M
5200MHz	Pass	Inf	36.06M	21.319M
5240MHz	Pass	Inf	30.33M	19.22M
5260MHz	Pass	Inf	30.36M	19.25M
5300MHz	Pass	Inf	30.24M	19.16M
5320MHz	Pass	Inf	20.07M	18.651M
5500MHz	Pass	Inf	22.53M	18.651M
5580MHz	Pass	Inf	31.83M	19.28M
5700MHz	Pass	Inf	20.13M	18.621M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	19.695M	14.498M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.42M	12.054M
5745MHz	Pass	500k	15.06M	20.84M
5785MHz	Pass	500k	15.09M	20.6M
5825MHz	Pass	500k	14.97M	20.3M
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-
5190MHz	Pass	Inf	39.78M	37.601M
5230MHz	Pass	Inf	64.02M	38.381M
5270MHz	Pass	Inf	61.32M	38.081M
5310MHz	Pass	Inf	39.72M	37.481M
5510MHz	Pass	Inf	39.72M	37.421M
5550MHz	Pass	Inf	43.26M	37.721M
5670MHz	Pass	Inf	39.72M	37.421M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	40.845M	34.003M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.9M	22.249M
5755MHz	Pass	500k	35.04M	38.021M
5795MHz	Pass	500k	35.04M	38.801M
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-
5210MHz	Pass	Inf	80.52M	77.121M
5290MHz	Pass	Inf	80.52M	77.001M
5530MHz	Pass	Inf	80.52M	77.241M
5610MHz	Pass	Inf	80.52M	77.481M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	76.2M	73.388M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	3.86M	37.901M
5775MHz	Pass	500k	75M	77.601M


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	81.12M	78.361M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	81.04M	78.041M
5570MHz	Pass	Inf	162M	154.963M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11a_Nss1,(6Mbps)_1TX **EBW**

5180MHz

19/05/2022

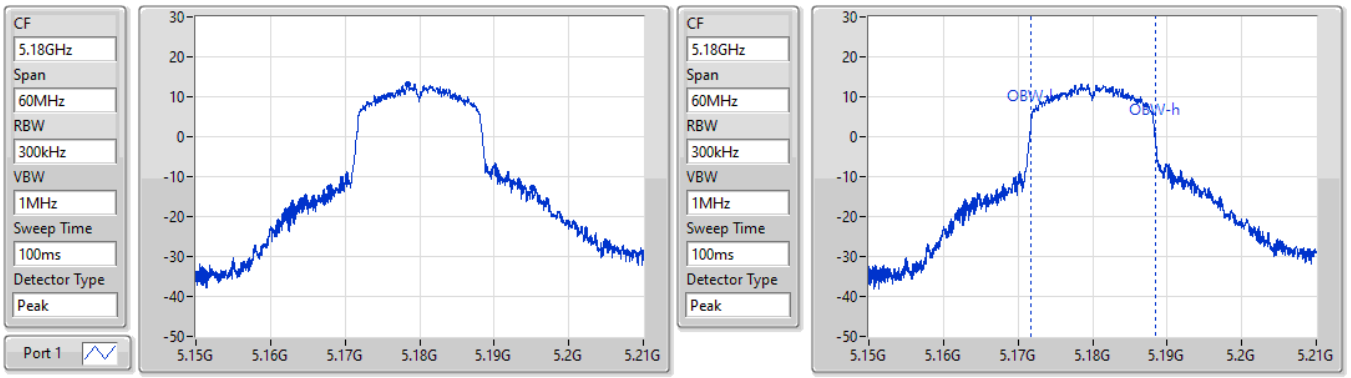


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
27.18M	5.16788G	5.19506G	16.642M	5.171754G	5.188396G	Inf	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5200MHz

19/05/2022

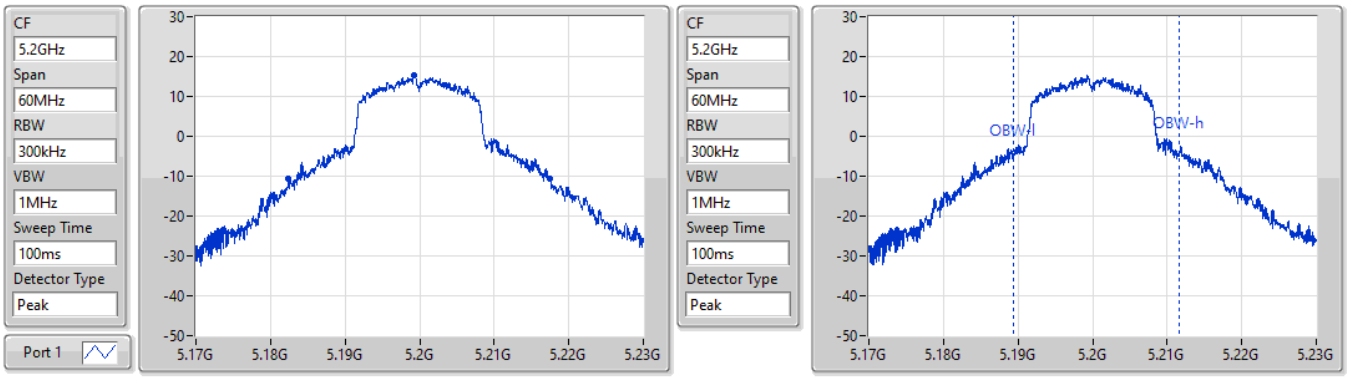


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
35.01M	5.18242G	5.21743G	22.249M	5.189445G	5.211694G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5240MHz

19/05/2022

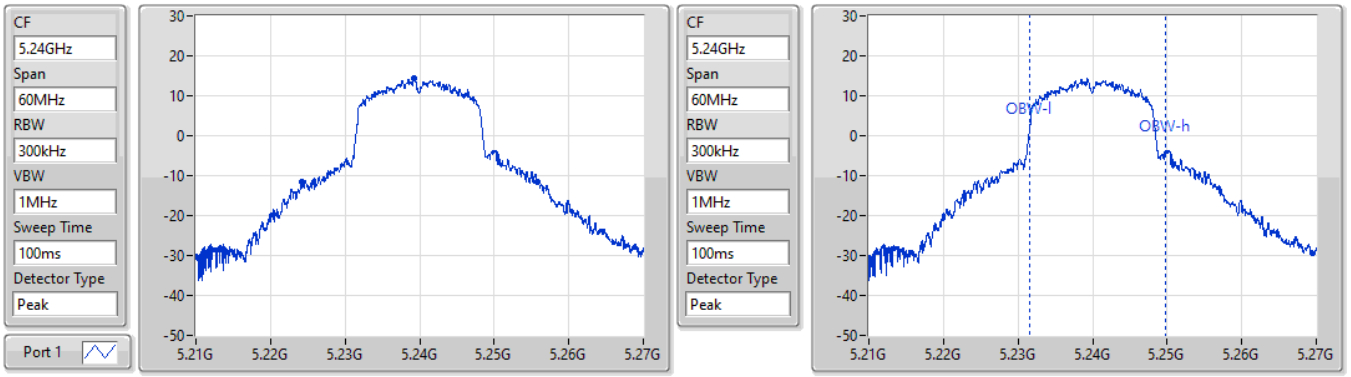


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.62M	5.22416G	5.25578G	18.351M	5.231484G	5.249835G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5260MHz

19/05/2022

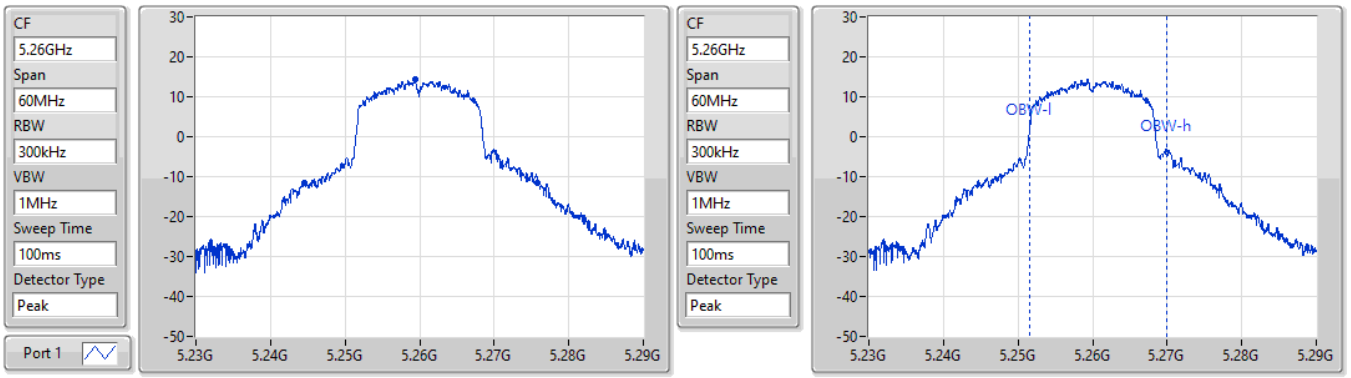


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.32M	5.24452G	5.27584G	18.501M	5.251484G	5.269985G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5300MHz

21/05/2022

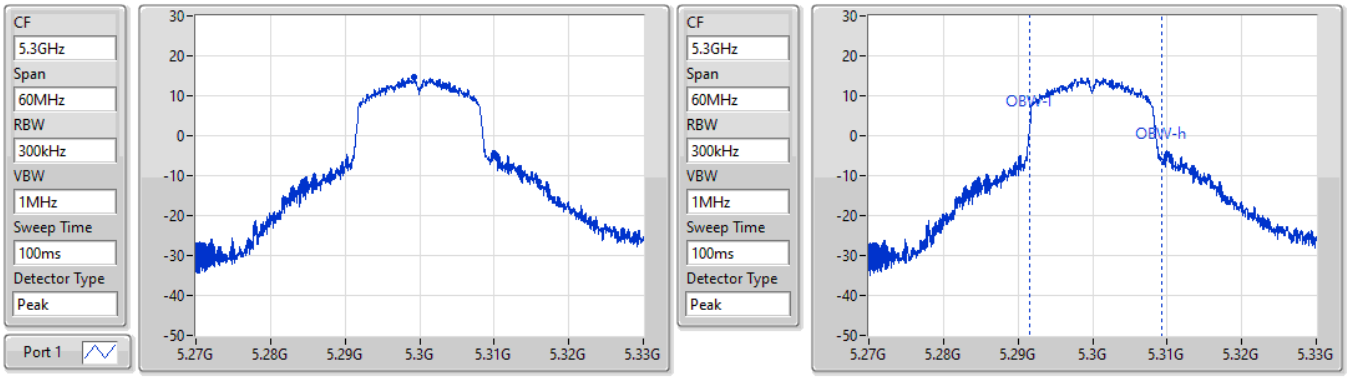


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.65M	5.28434G	5.31599G	17.721M	5.291604G	5.309325G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5320MHz


19/05/2022

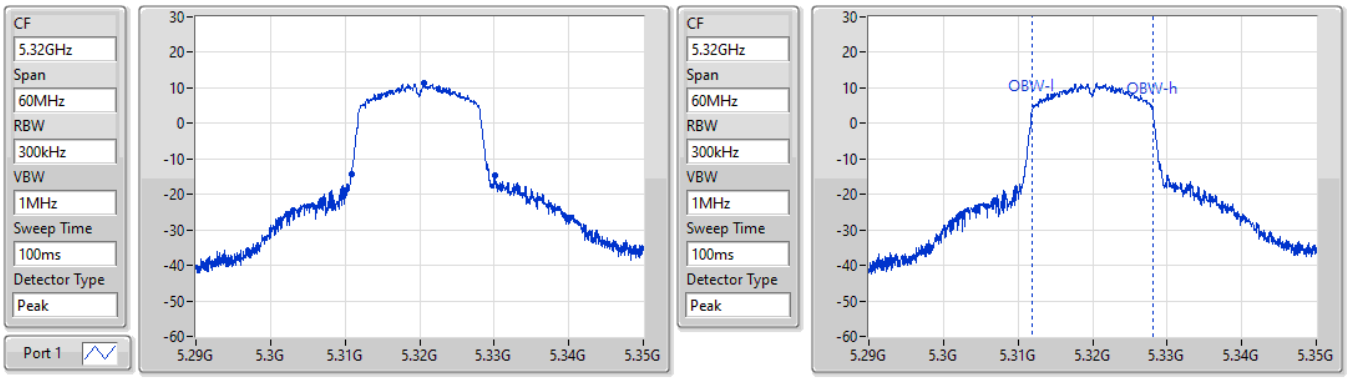

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.23M	5.31085G	5.33008G	16.222M	5.311874G	5.328096G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW


5500MHz

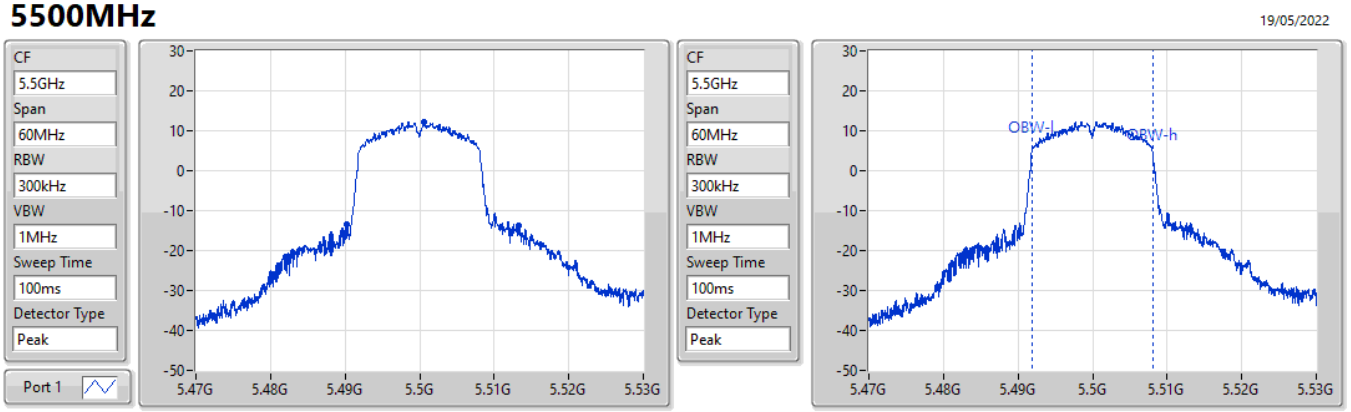

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.98M	5.49025G	5.51323G	16.312M	5.491844G	5.508156G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5580MHz

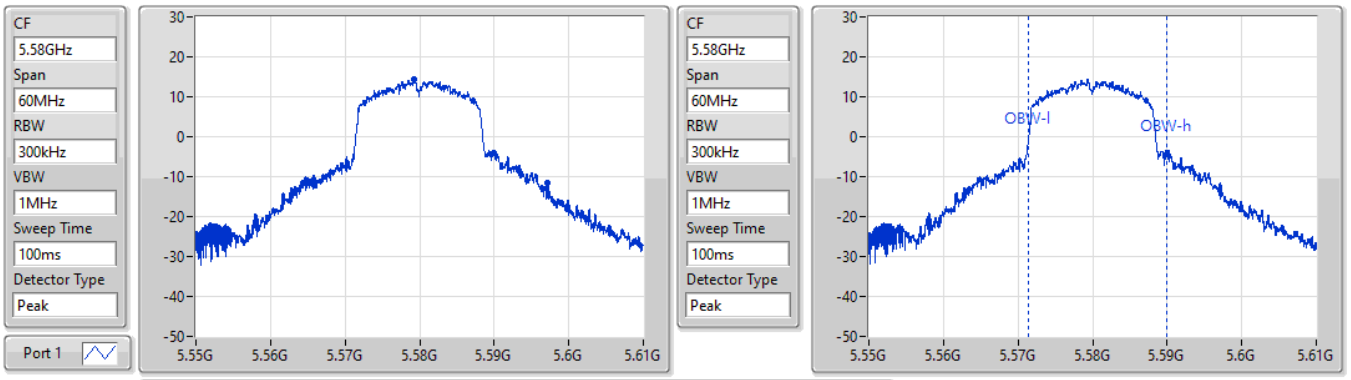


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
32.73M	5.56434G	5.59707G	18.561M	5.571364G	5.589925G	Inf	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5700MHz

19/05/2022

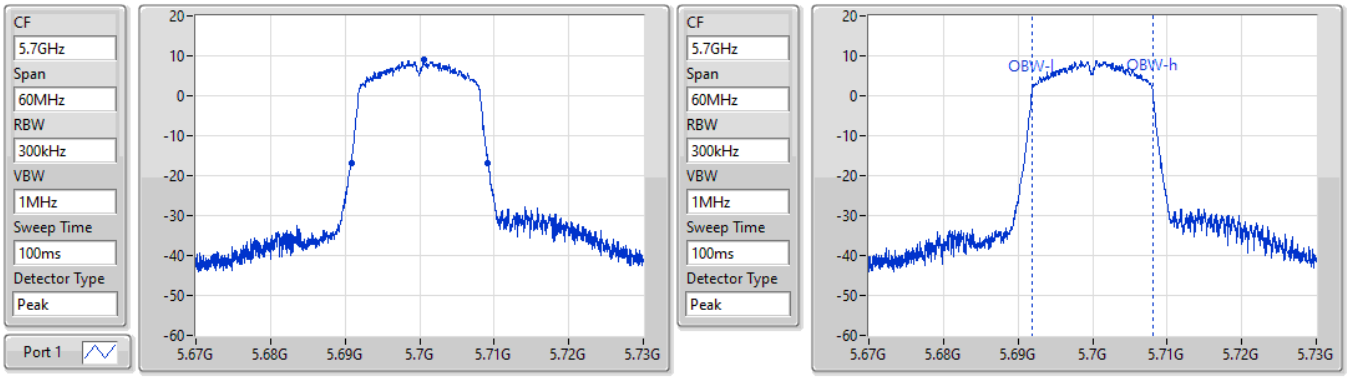


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.36M	5.69082G	5.70918G	16.162M	5.691874G	5.708036G	Inf	1

802.11a_Nss1,(6Mbps)_1TX **EBW**

5720MHz Straddle 5.47-5.725GHz

19/05/2022

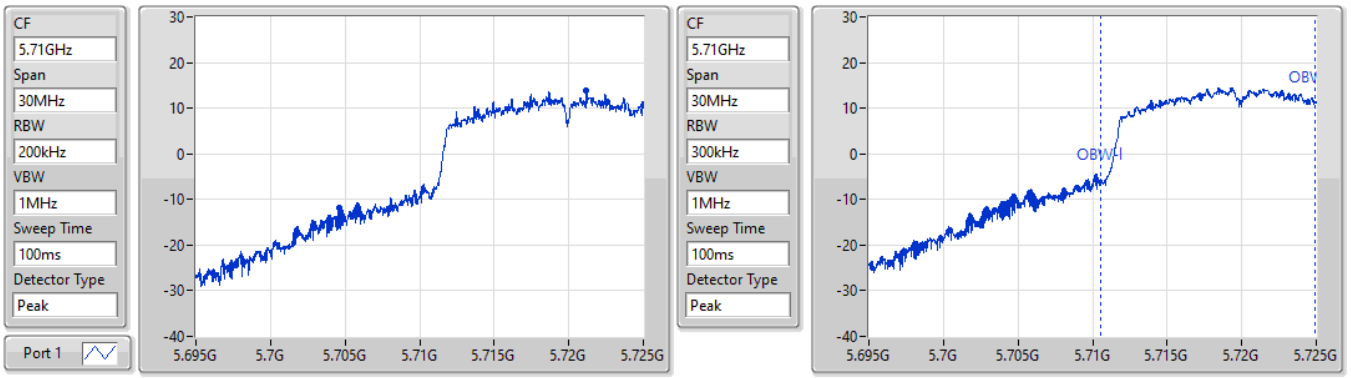


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.385M	5.704615G	5.725G	14.363M	5.710555G	5.724918G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5720MHz Straddle 5.725-5.85GHz

02/06/2022

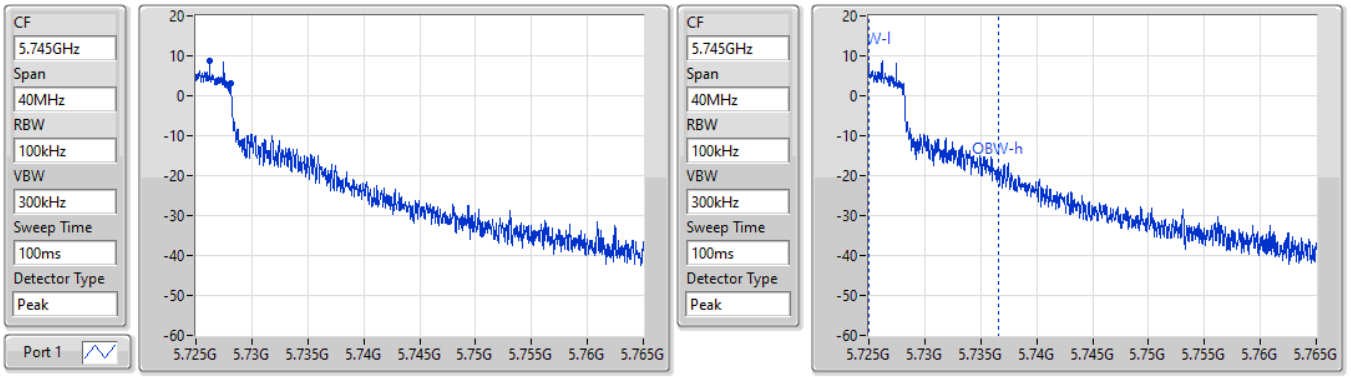


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.1M	5.725G	5.7281G	11.554M	5.72501G	5.736564G	500k	1

802.11a_Nss1,(6Mbps)_1TX EBW

5720MHz Straddle 5.725-5.85GHz

02/06/2022

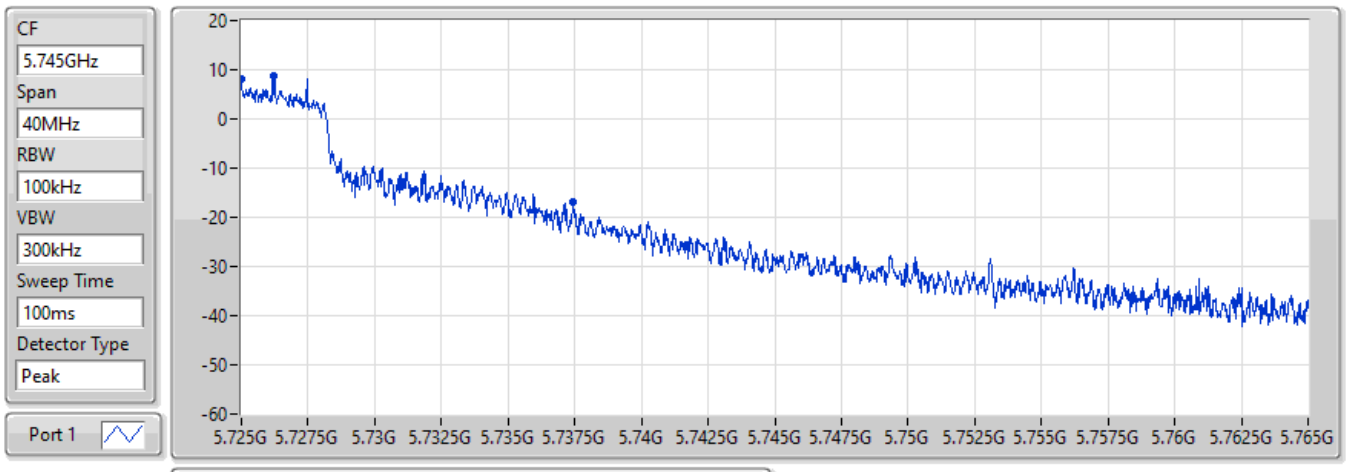


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
12.46M	5.725G	5.73746G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5745MHz

02/06/2022

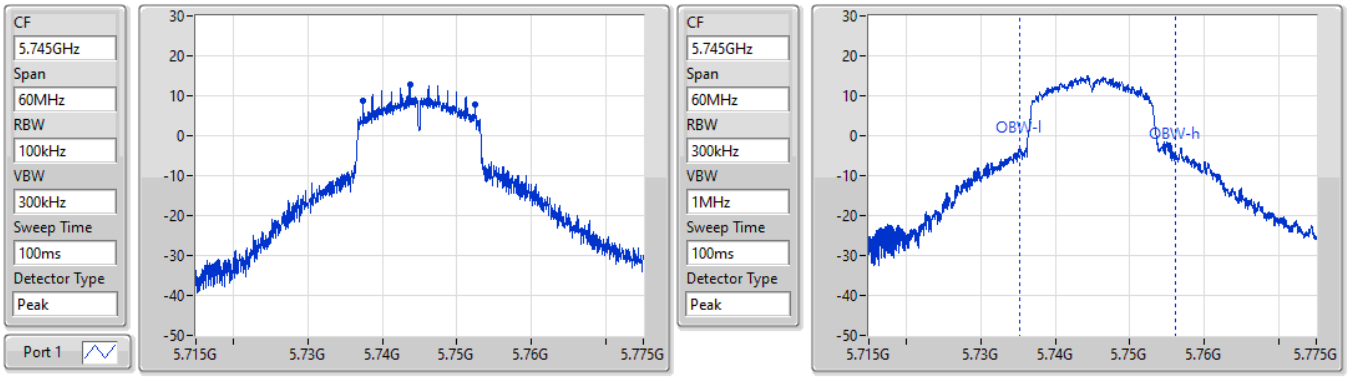


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.06M	5.73744G	5.7525G	20.84M	5.735225G	5.756064G	500k	1

802.11a_Nss1,(6Mbps)_1TX EBW

5745MHz

02/06/2022

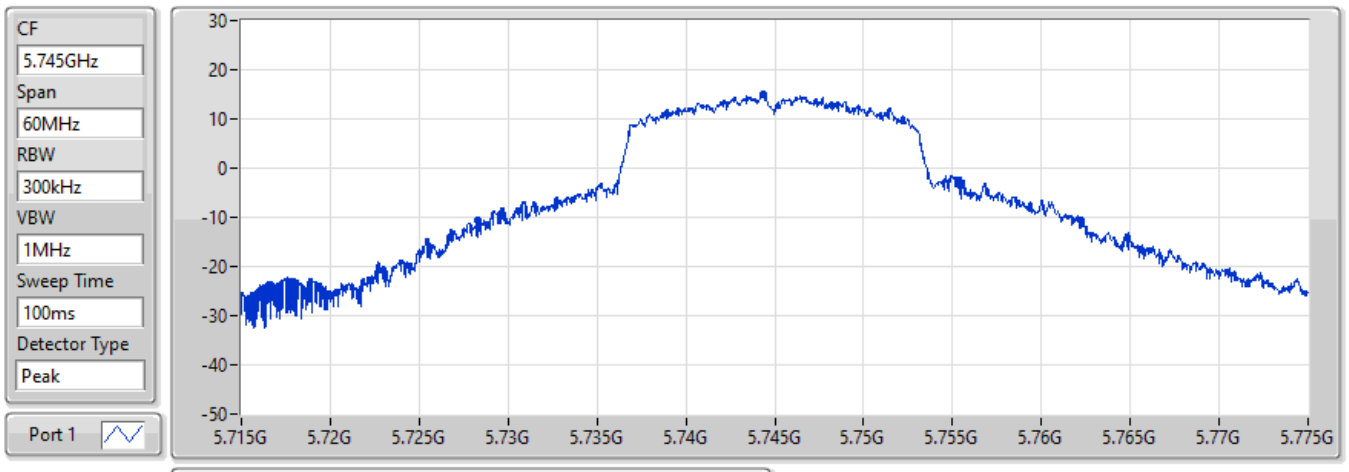


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
33.87M	5.72832G	5.76219G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5785MHz

02/06/2022

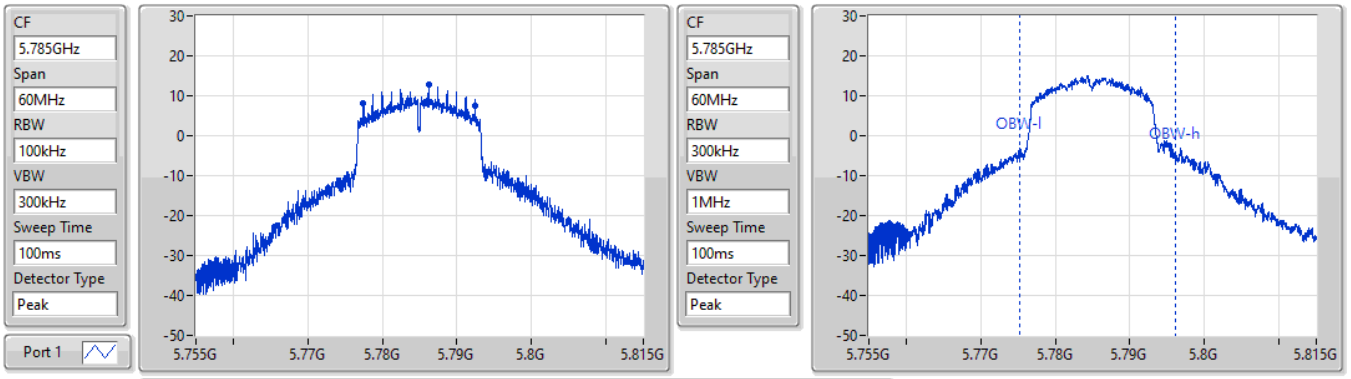


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.06M	5.77744G	5.7925G	20.81M	5.775255G	5.796064G	500k	1

802.11a_Nss1,(6Mbps)_1TX EBW

5785MHz

02/06/2022

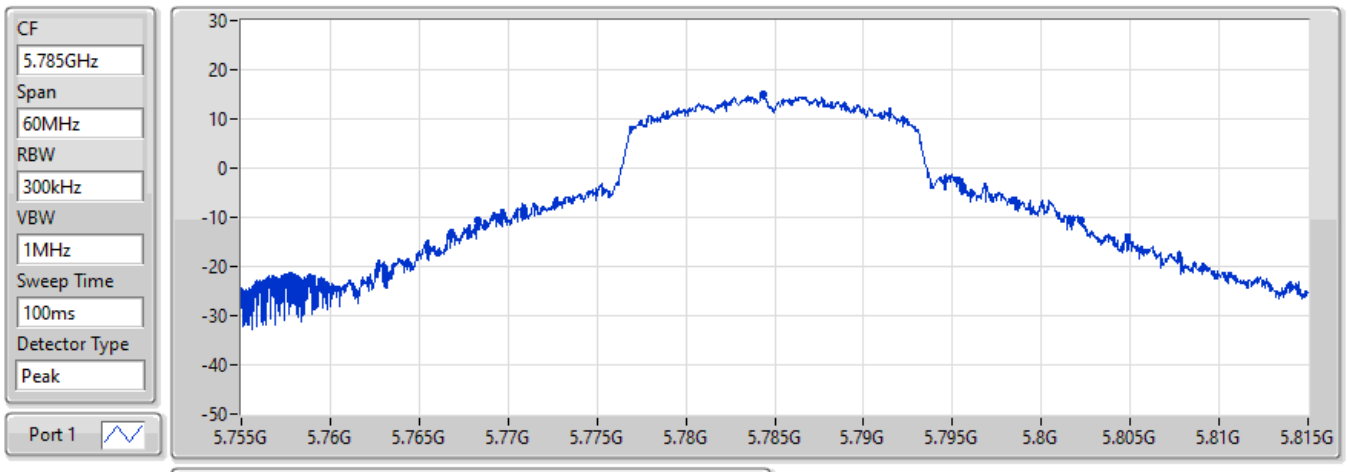


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
33.87M	5.76832G	5.80219G	Inf	1

802.11a_Nss1,(6Mbps)_1TX EBW

5825MHz

02/06/2022

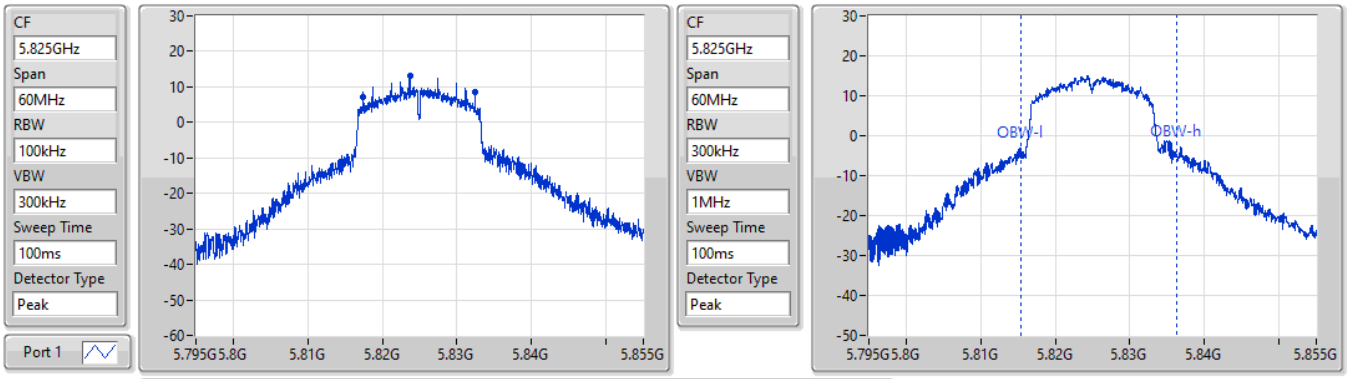


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.06M	5.81741G	5.83247G	20.99M	5.815345G	5.836334G	500k	1

802.11a_Nss1,(6Mbps)_1TX EBW

5825MHz

02/06/2022

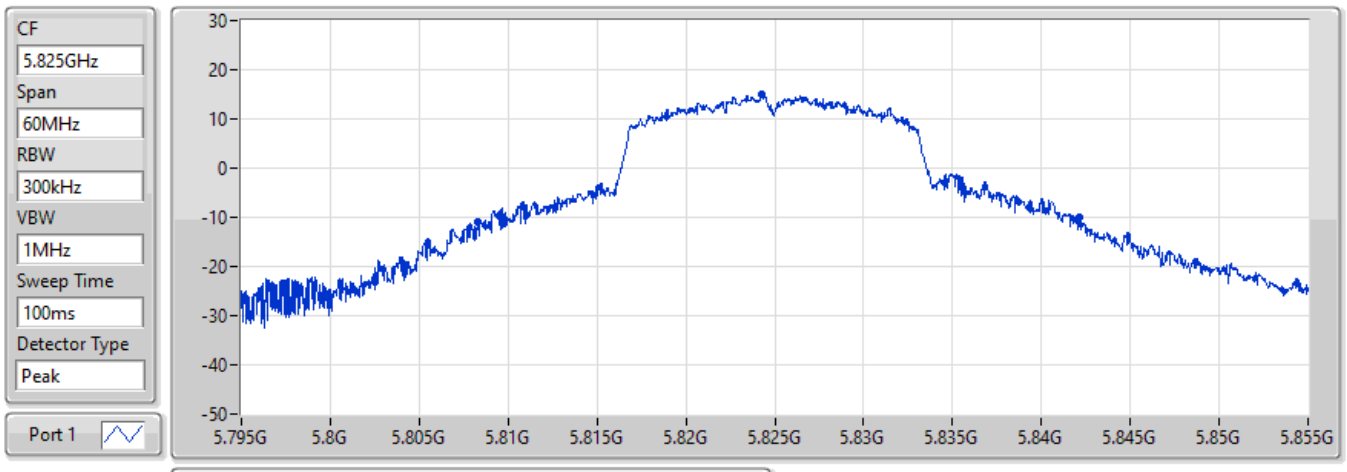


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
33.81M	5.80832G	5.84213G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5180MHz

19/05/2022

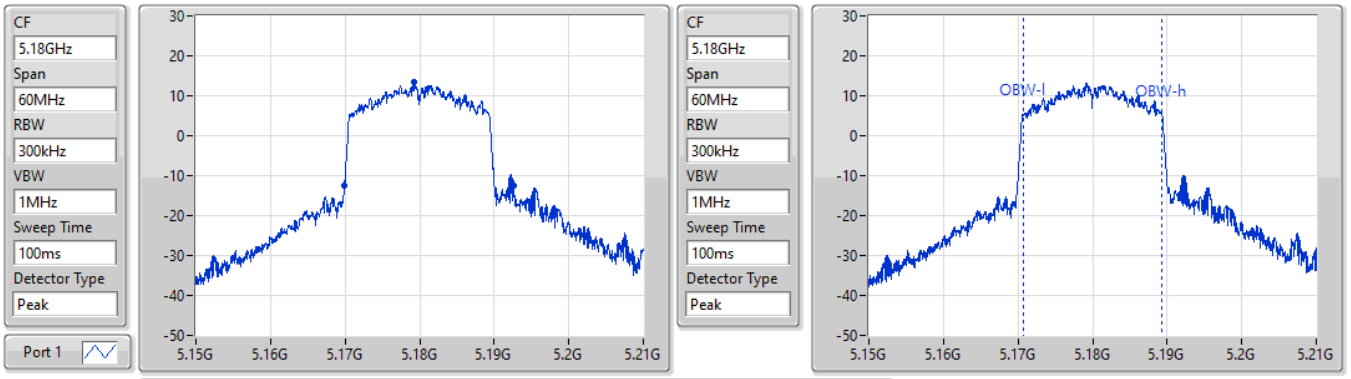


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.68M	5.16992G	5.1926G	18.681M	5.170645G	5.189325G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5200MHz


19/05/2022

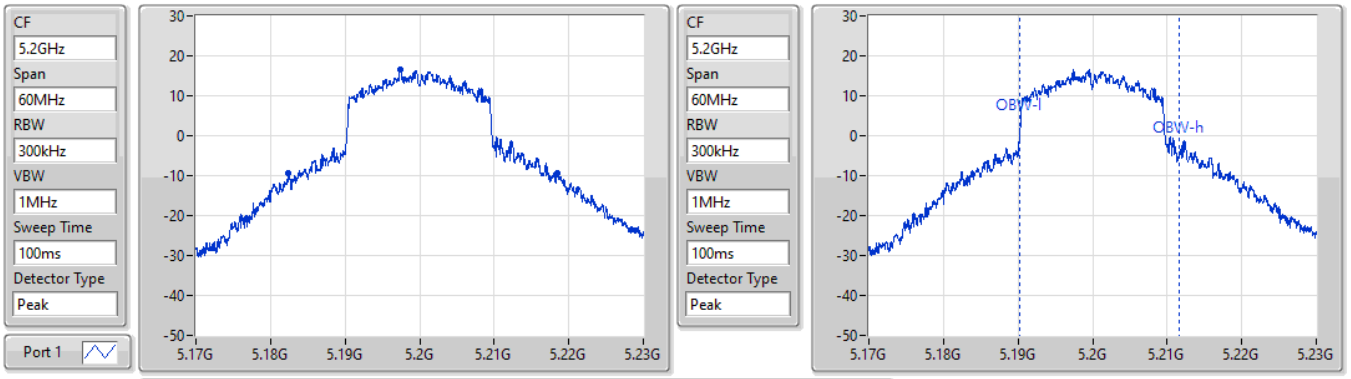

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
36.06M	5.18242G	5.21848G	21.319M	5.190285G	5.211604G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5240MHz

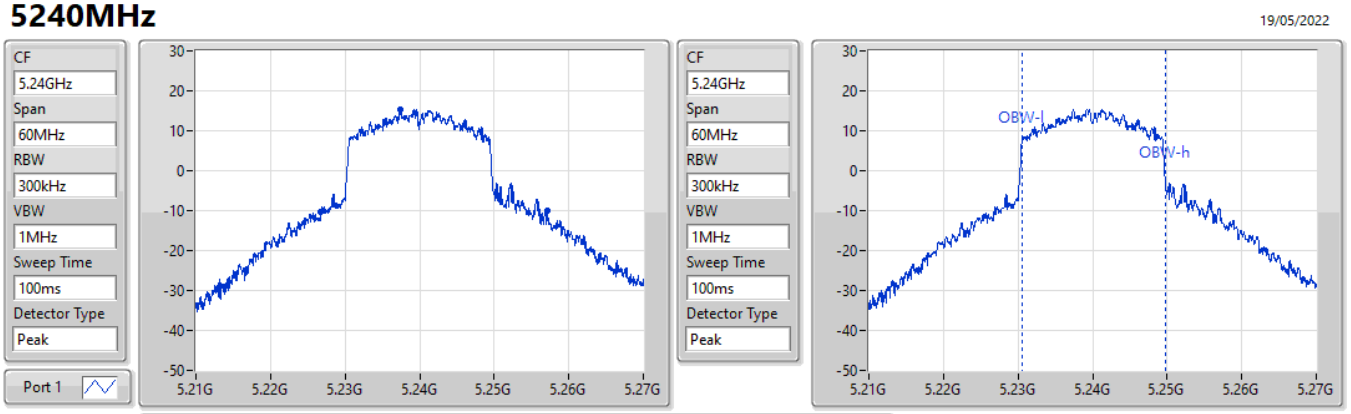

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
30.33M	5.22677G	5.2571G	19.22M	5.230495G	5.249715G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5260MHz

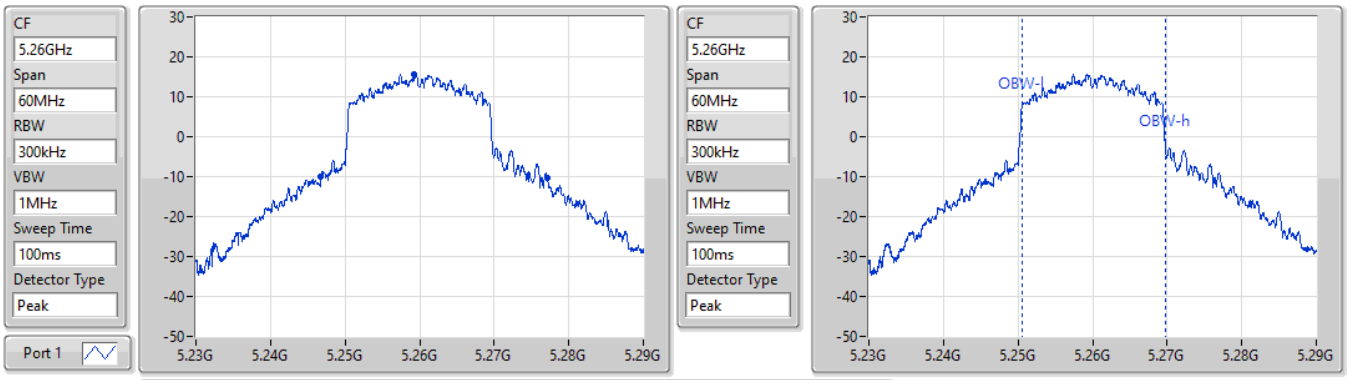


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
30.36M	5.24677G	5.27713G	19.25M	5.250495G	5.269745G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5300MHz

19/05/2022

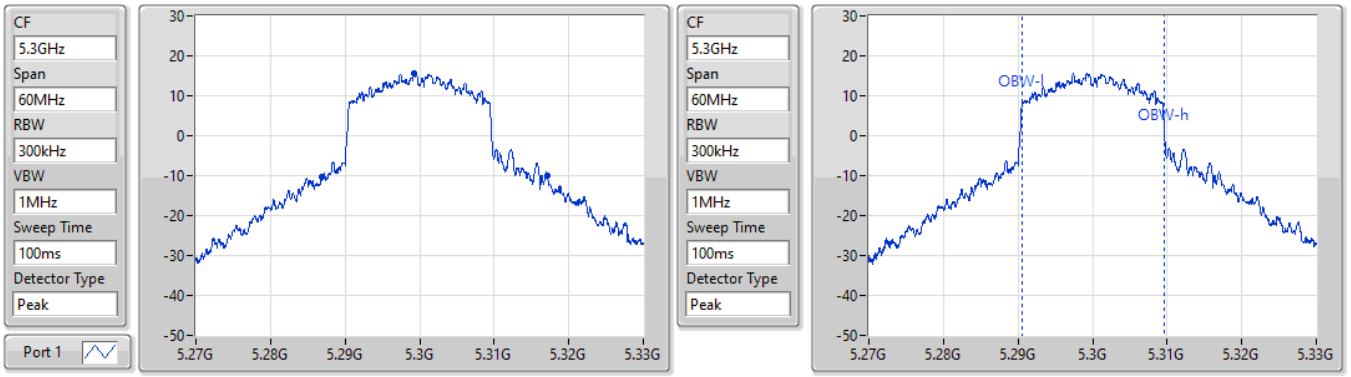


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
30.24M	5.28689G	5.31713G	19.16M	5.290525G	5.309685G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5320MHz

19/05/2022

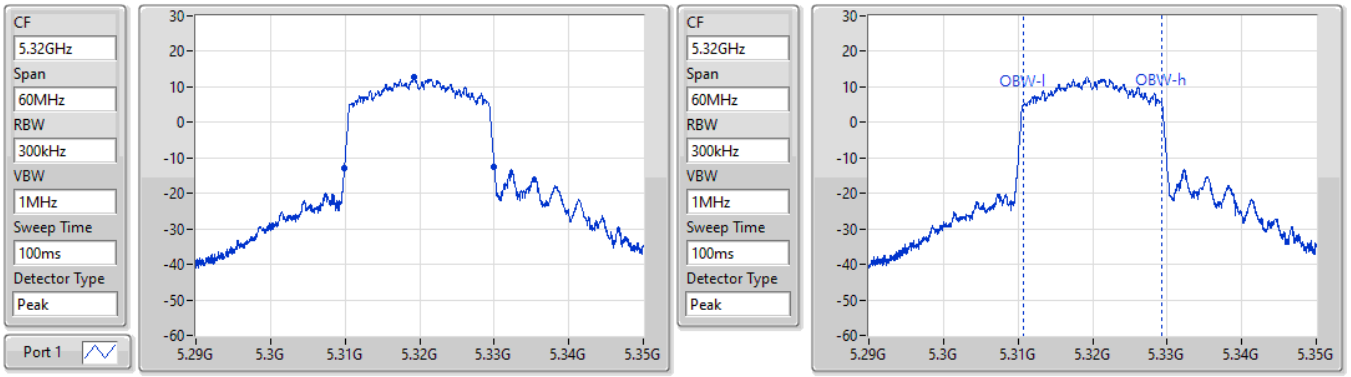


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.07M	5.30992G	5.32999G	18.651M	5.310645G	5.329295G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5500MHz

19/05/2022

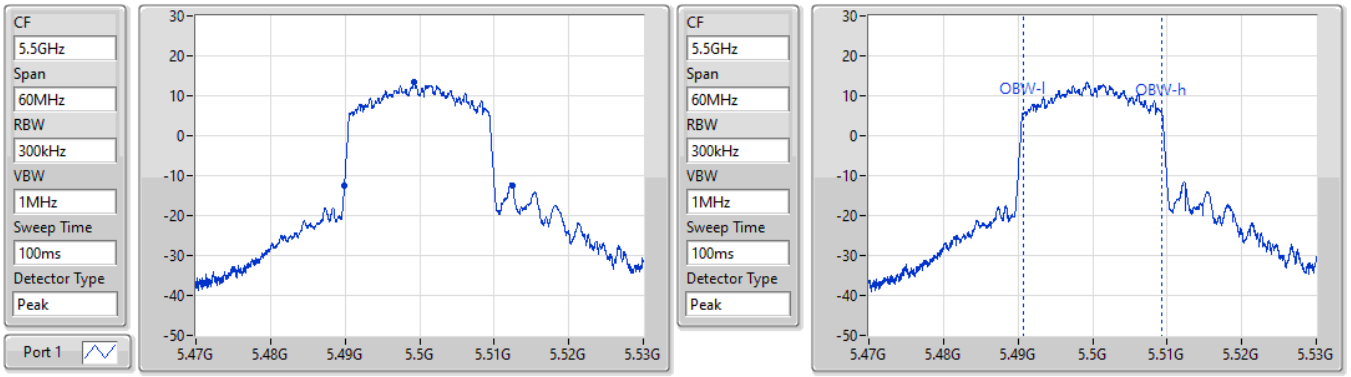


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.53M	5.48992G	5.51245G	18.651M	5.490645G	5.509295G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5580MHz

19/05/2022

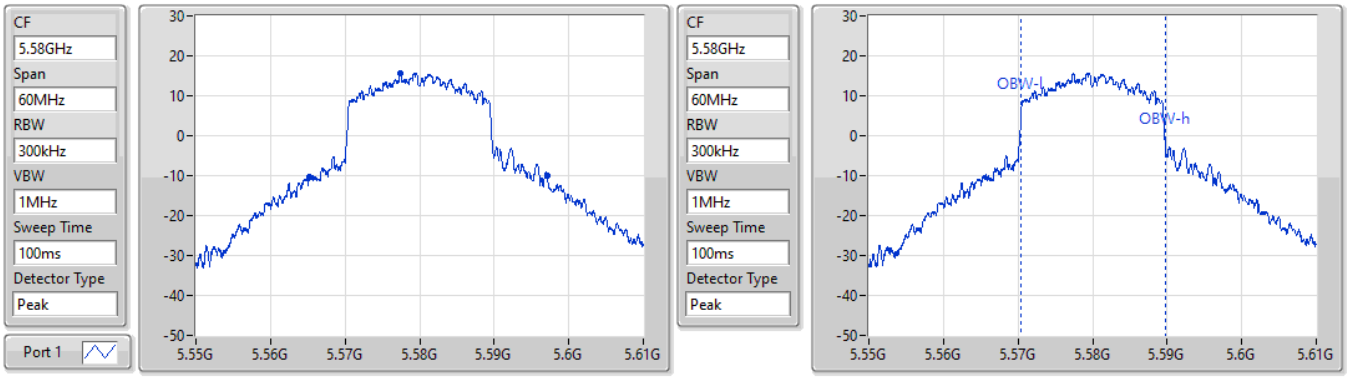


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.83M	5.56527G	5.5971G	19.28M	5.570465G	5.589745G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5700MHz

19/05/2022

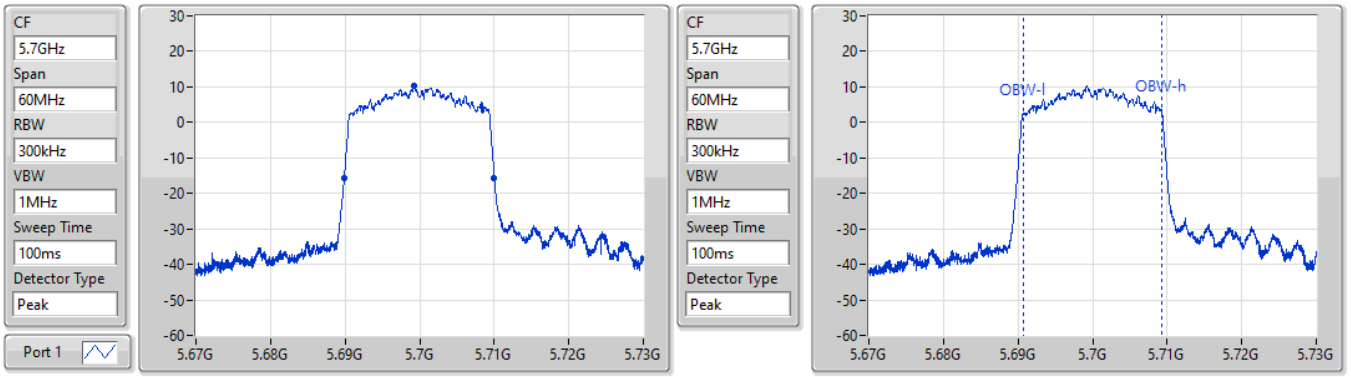


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.13M	5.68989G	5.71002G	18.621M	5.690645G	5.709265G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.47-5.725GHz

19/05/2022

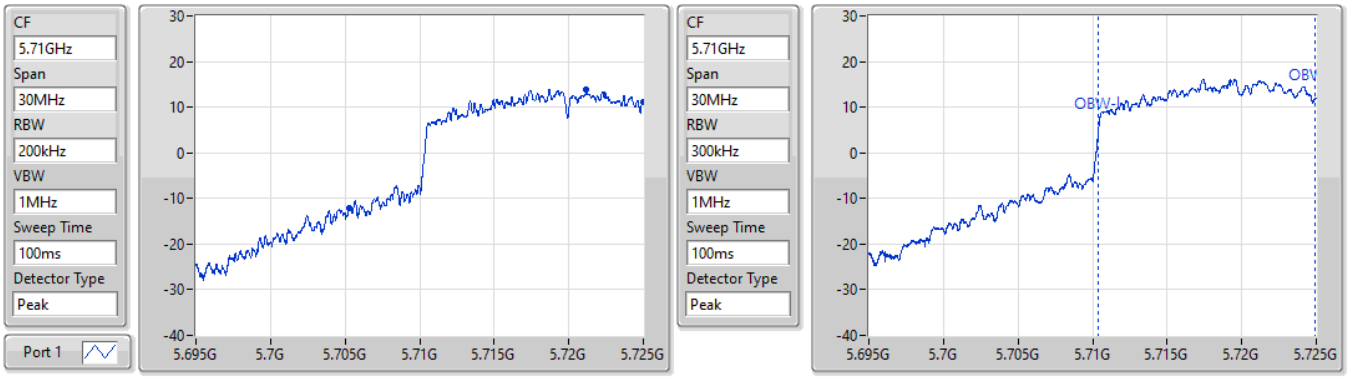


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.695M	5.705305G	5.725G	14.498M	5.710405G	5.724903G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.725-5.85GHz

02/06/2022

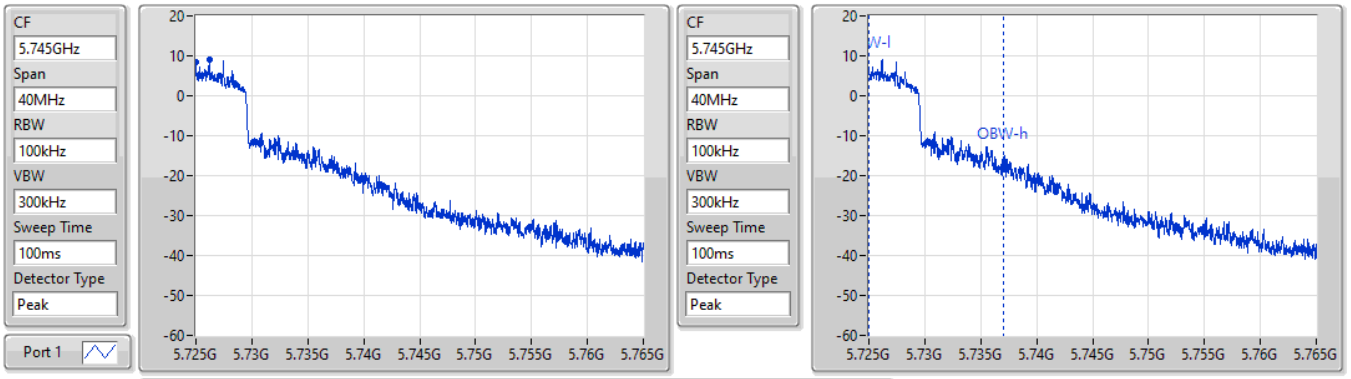


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.42M	5.725G	5.72842G	12.054M	5.72501G	5.737064G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.725-5.85GHz

02/06/2022

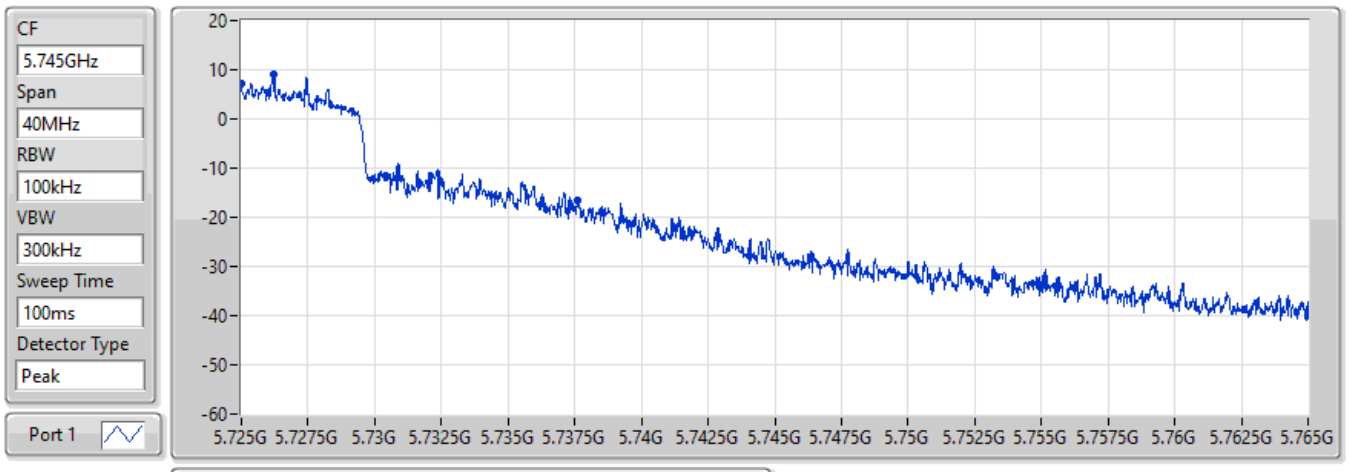


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
12.62M	5.725G	5.73762G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5745MHz

02/06/2022

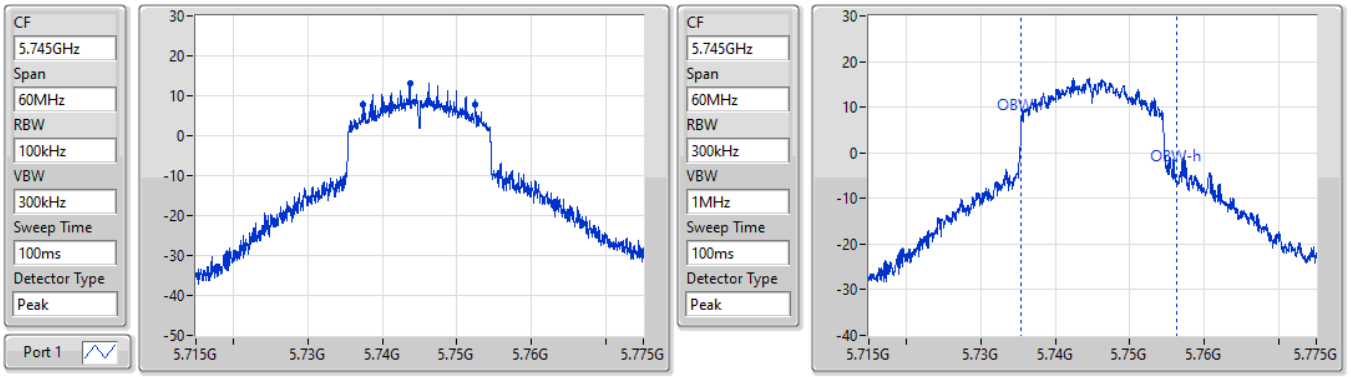


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.06M	5.73741G	5.75247G	20.84M	5.735405G	5.756244G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5745MHz

02/06/2022

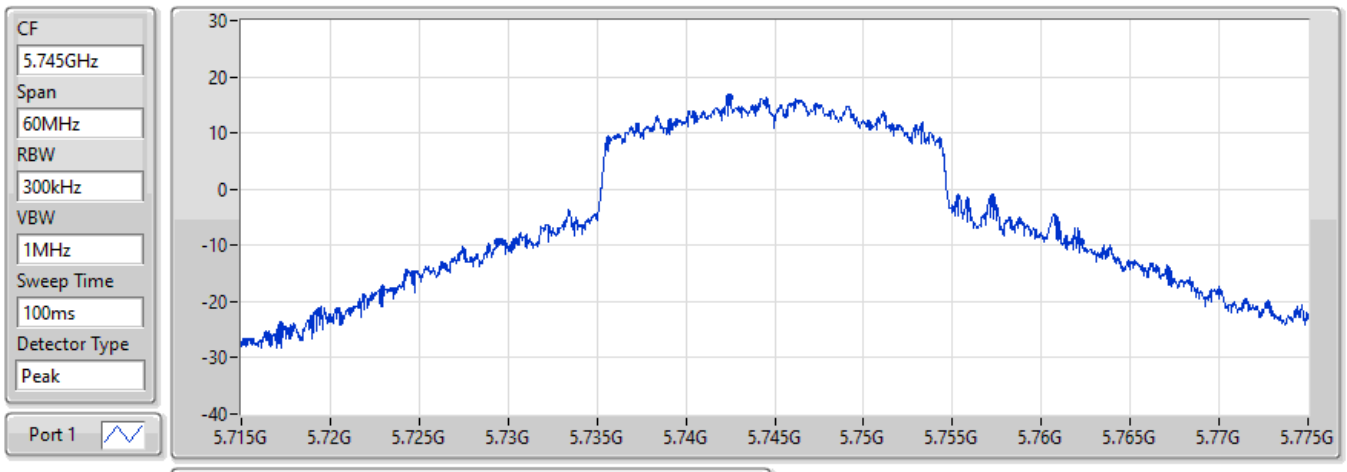


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
32.85M	5.7294G	5.76225G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5785MHz

02/06/2022

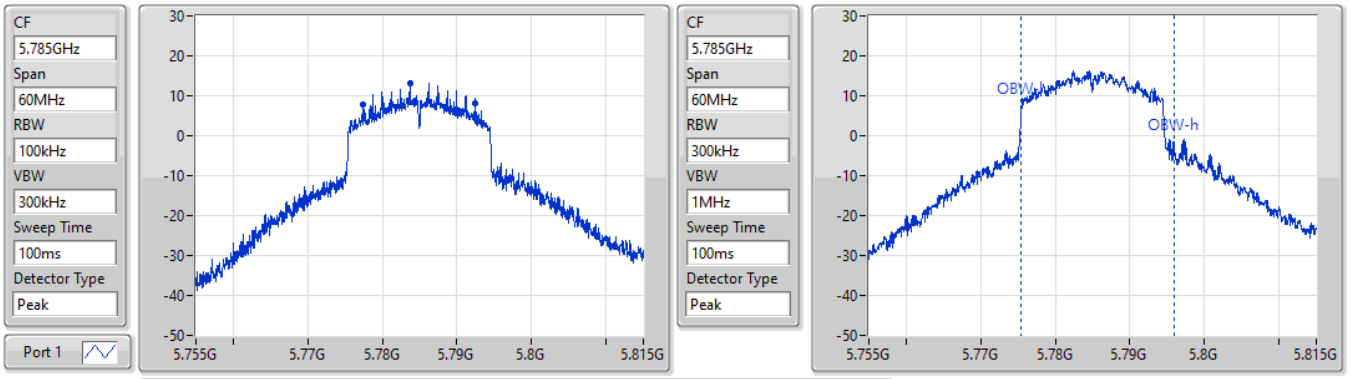


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.09M	5.77741G	5.7925G	20.6M	5.775405G	5.796004G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5785MHz

02/06/2022

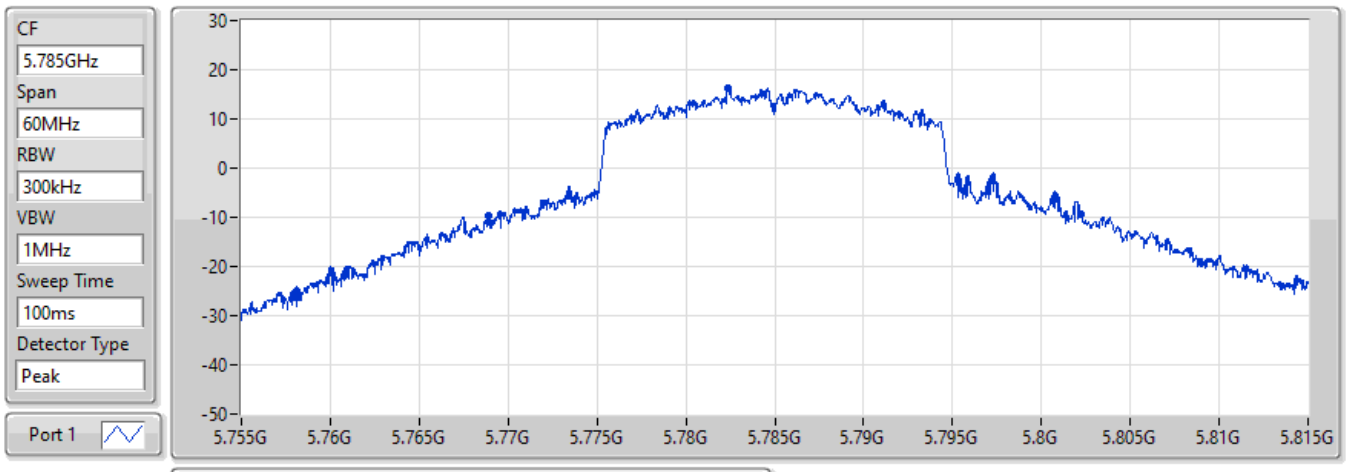


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
33.33M	5.76889G	5.80222G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5825MHz

02/06/2022

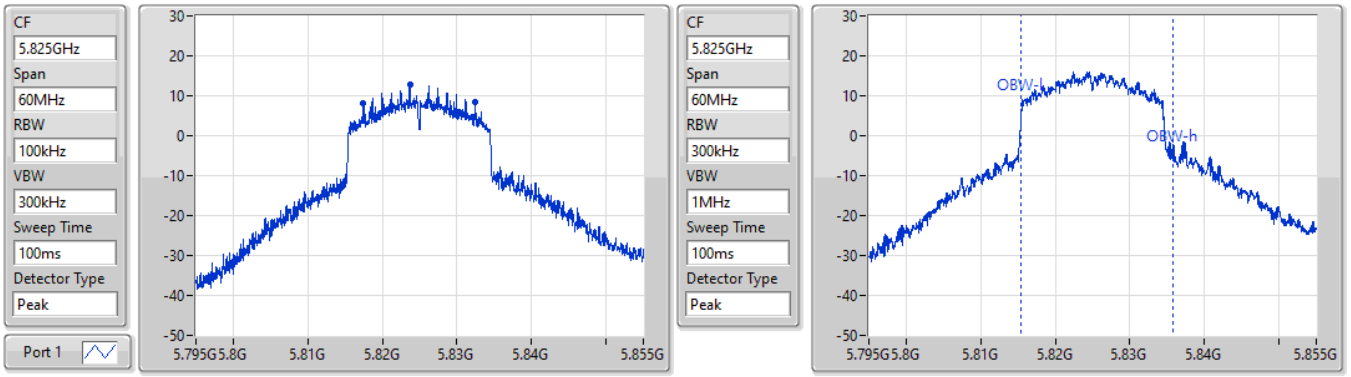


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.97M	5.81747G	5.83244G	20.3M	5.815465G	5.835765G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5825MHz

02/06/2022

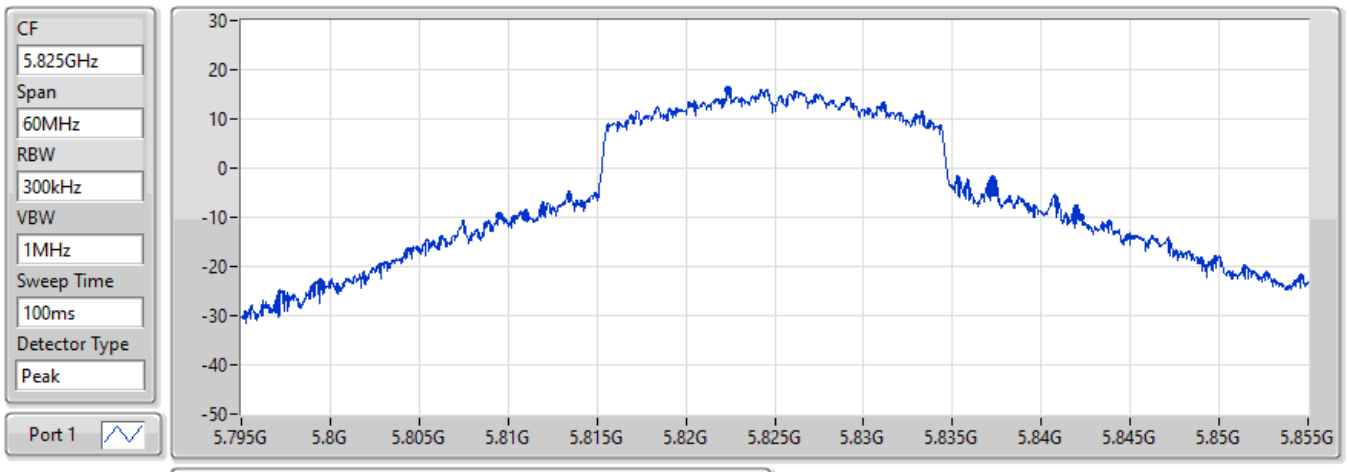


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
32.73M	5.80949G	5.84222G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5190MHz

19/05/2022

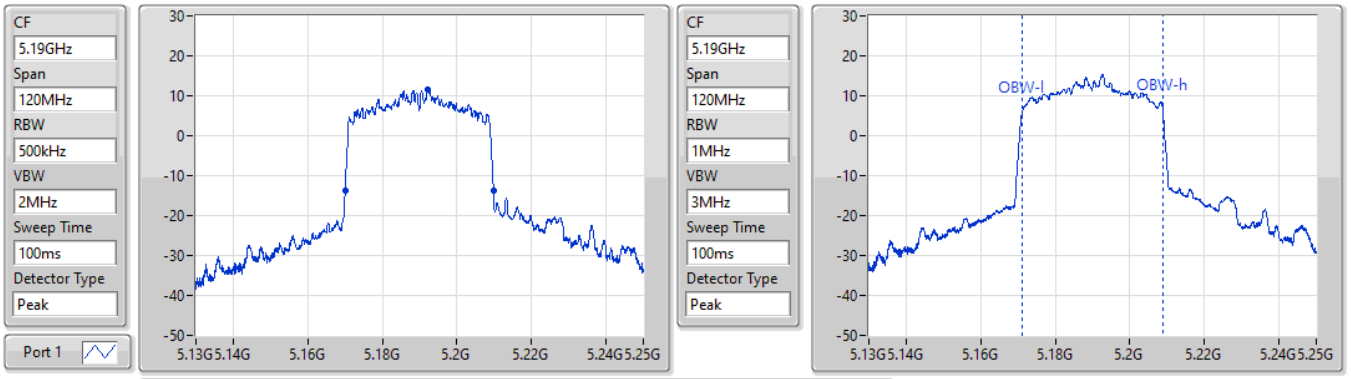


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.78M	5.17002G	5.2098G	37.601M	5.171169G	5.208771G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5230MHz


19/05/2022

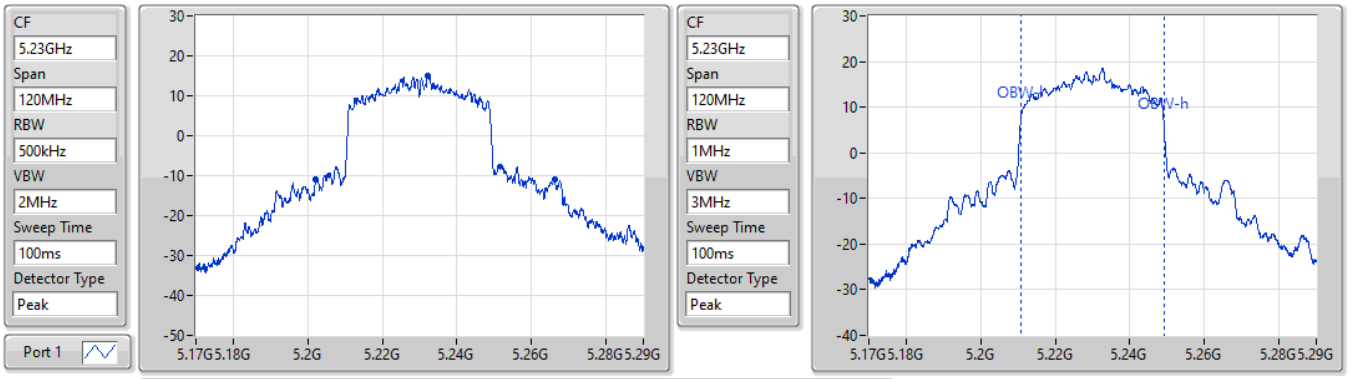

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
64.02M	5.20222G	5.26624G	38.381M	5.21081G	5.24919G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW


5270MHz

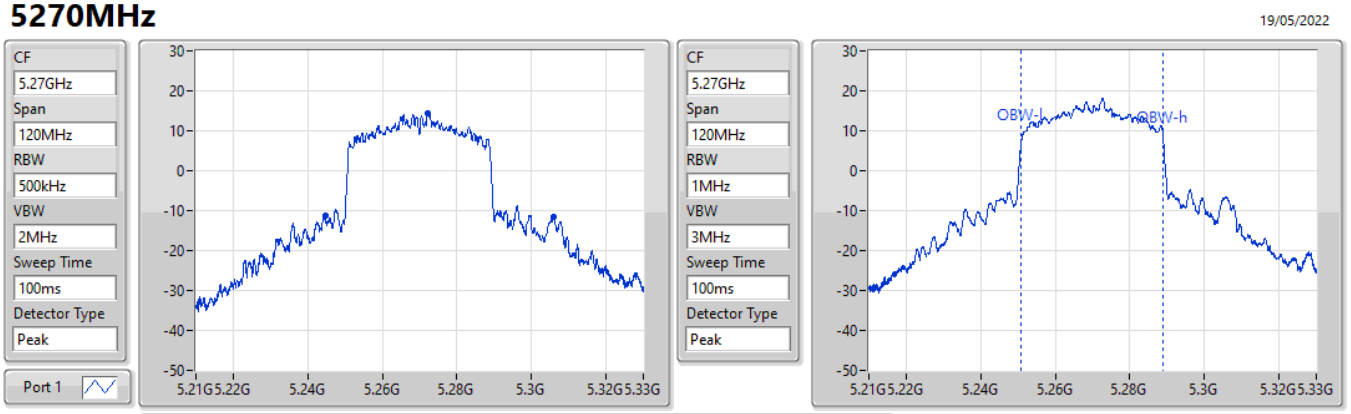

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
61.32M	5.24462G	5.30594G	38.081M	5.25093G	5.28901G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW


5310MHz

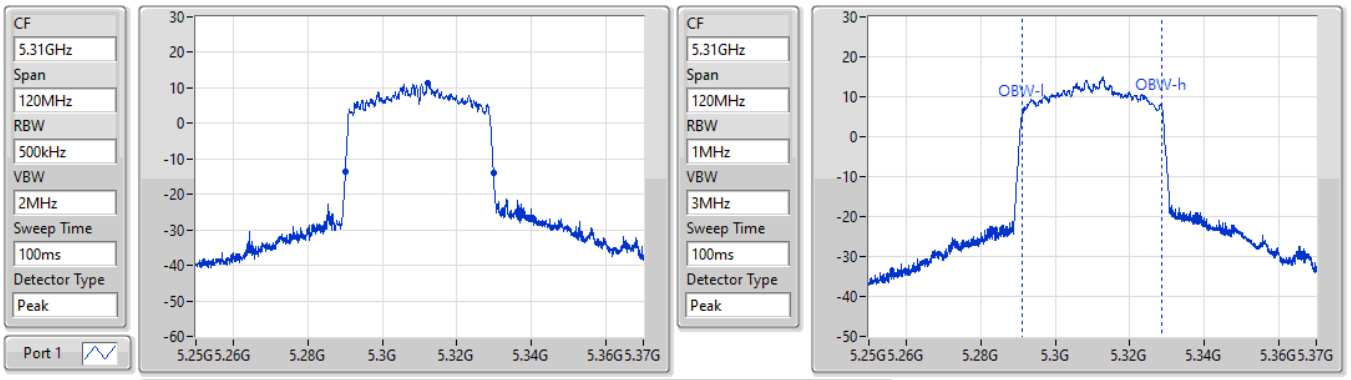

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.72M	5.29008G	5.3298G	37.481M	5.291169G	5.328651G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW


5510MHz

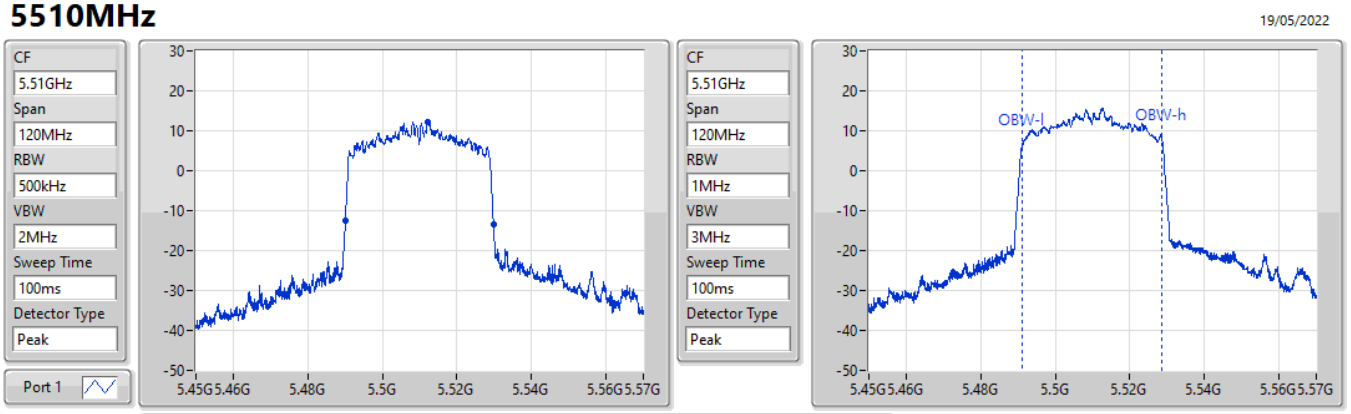

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.72M	5.49008G	5.5298G	37.421M	5.491229G	5.528651G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW


5550MHz

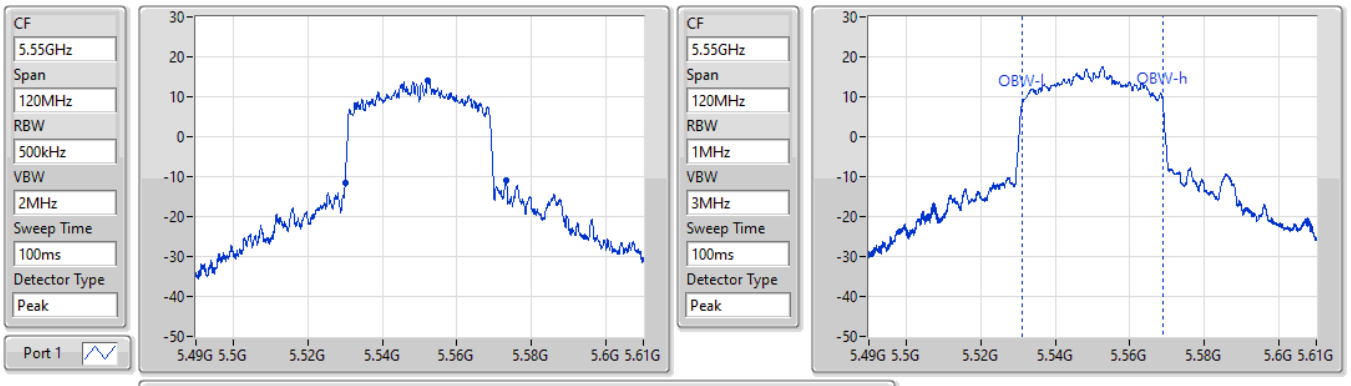

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
43.26M	5.53002G	5.57328G	37.721M	5.531109G	5.568831G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW


5670MHz

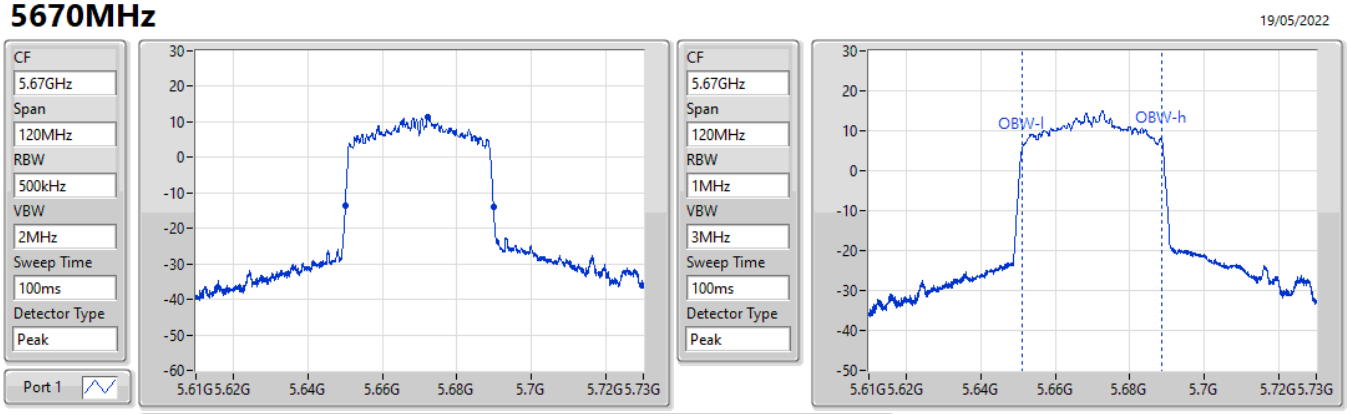

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.72M	5.65008G	5.6898G	37.421M	5.651229G	5.688651G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5710MHz Straddle 5.47-5.725GHz

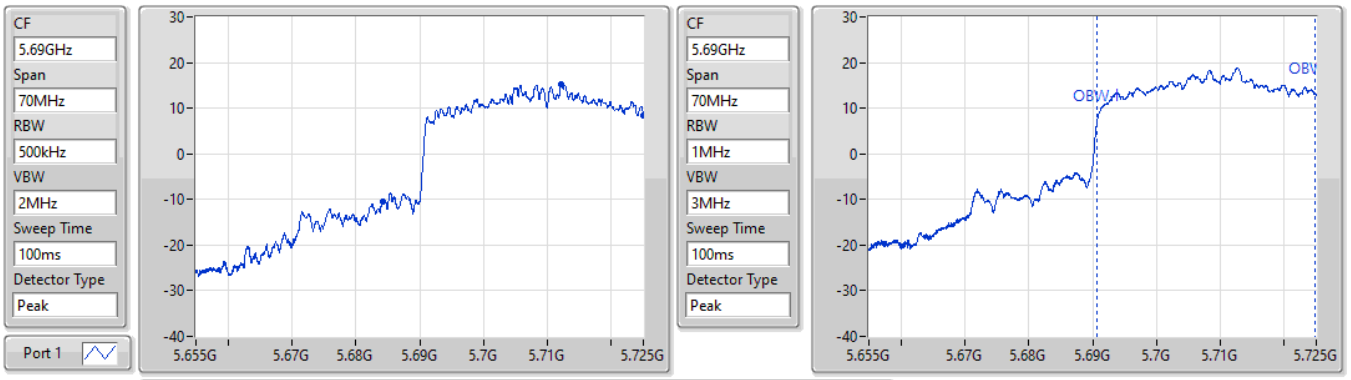


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
40.845M	5.684155G	5.725G	34.003M	5.690735G	5.724738G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5710MHz Straddle 5.725-5.85GHz

02/06/2022

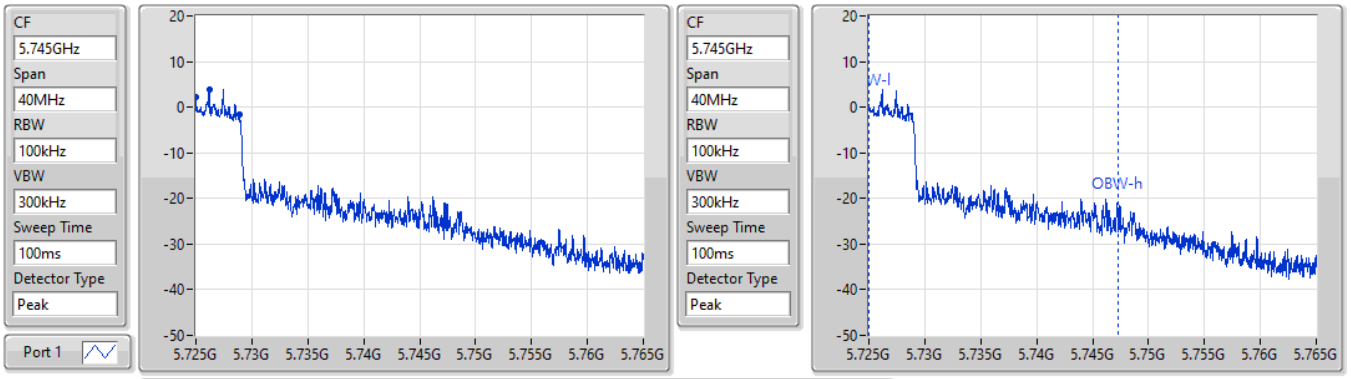


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.9M	5.725G	5.7289G	22.249M	5.72501G	5.747259G	500k	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5710MHz Straddle 5.725-5.85GHz

02/06/2022

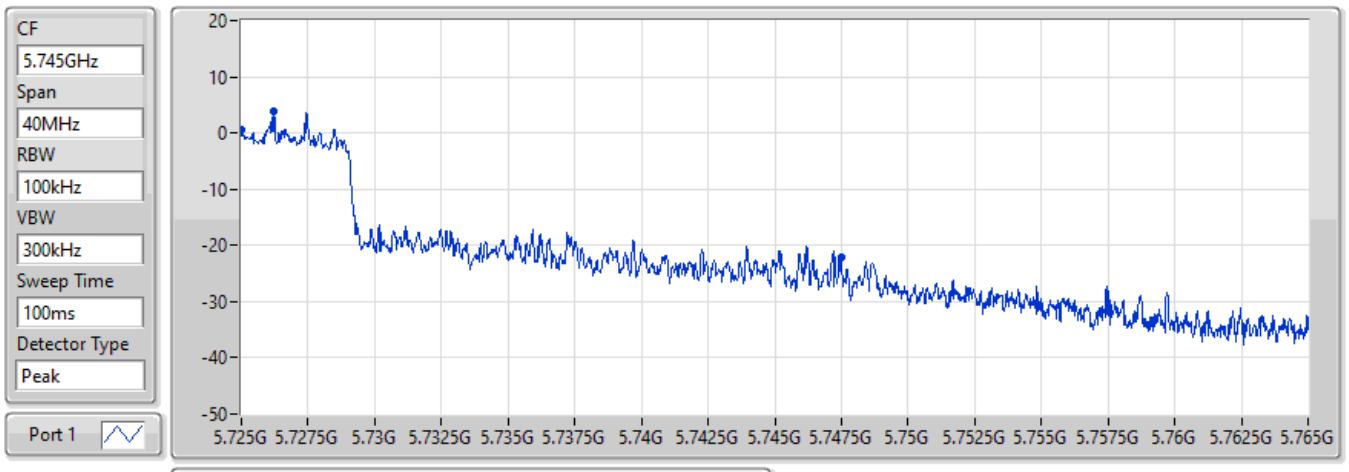


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
22.48M	5.725G	5.74748G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5755MHz

02/06/2022

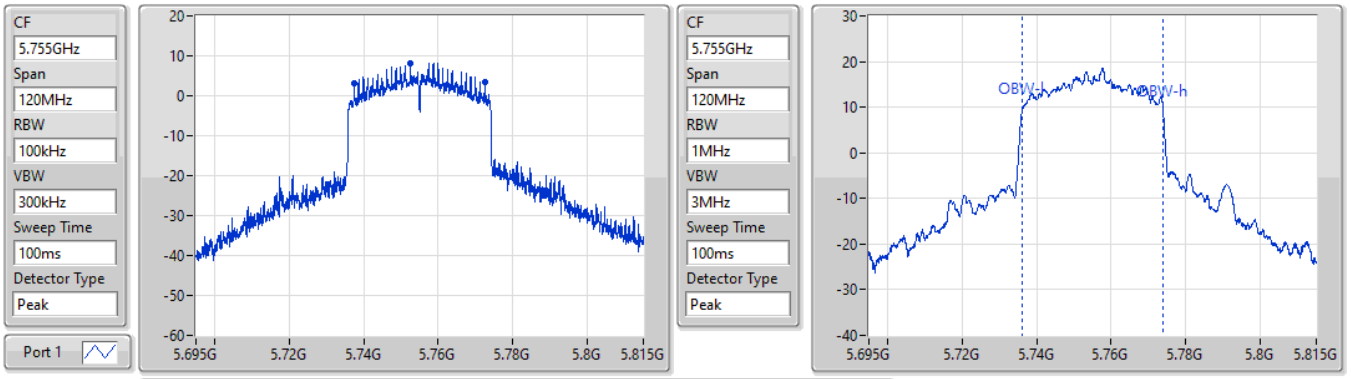


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
35.04M	5.73742G	5.77246G	38.021M	5.73599G	5.77401G	500k	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5755MHz

02/06/2022

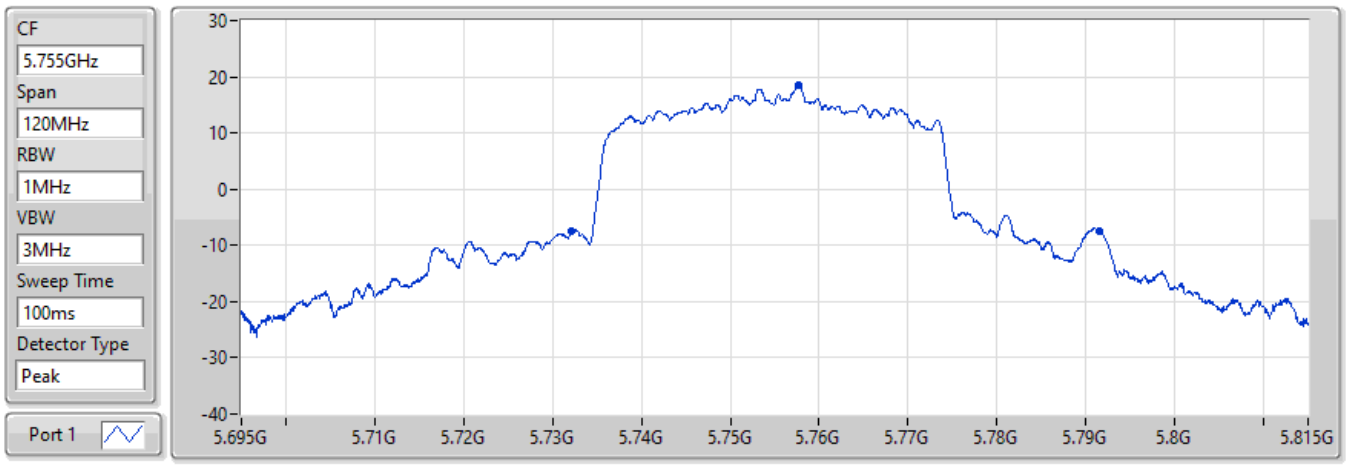


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
59.34M	5.7322G	5.79154G	Inf	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5795MHz

02/06/2022

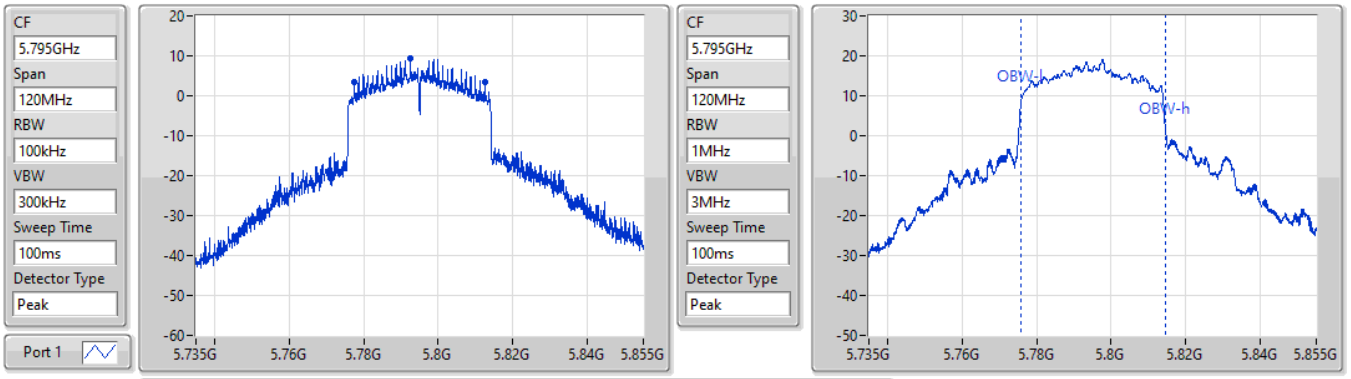


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
35.04M	5.77742G	5.81246G	38.801M	5.77587G	5.81467G	500k	1

802.11ax HEW40_Nss1,(MCS0)_1TX EBW

5795MHz

02/06/2022

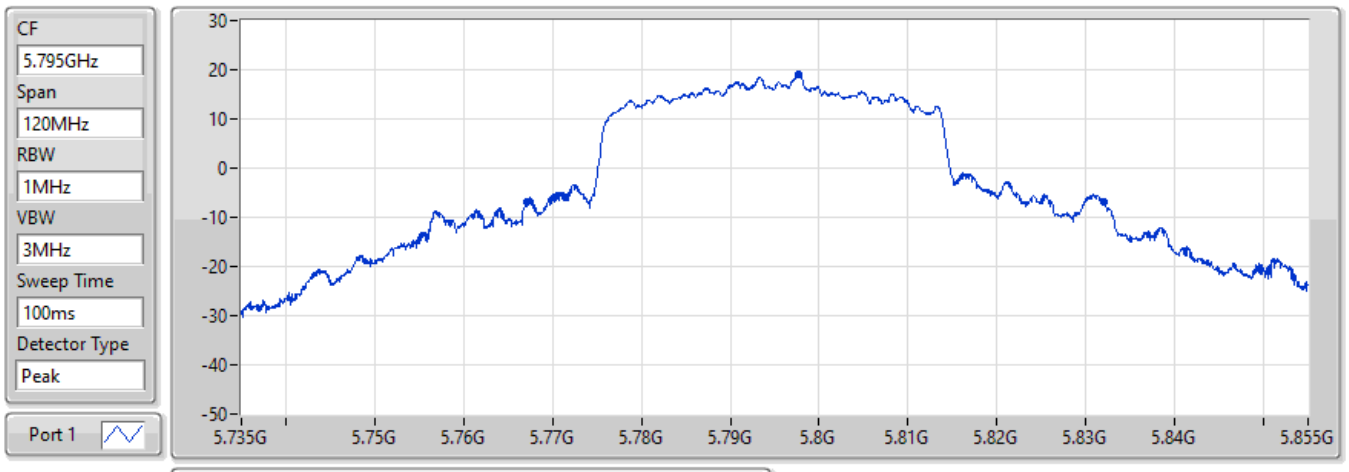


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
64.92M	5.76704G	5.83196G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5210MHz

19/05/2022

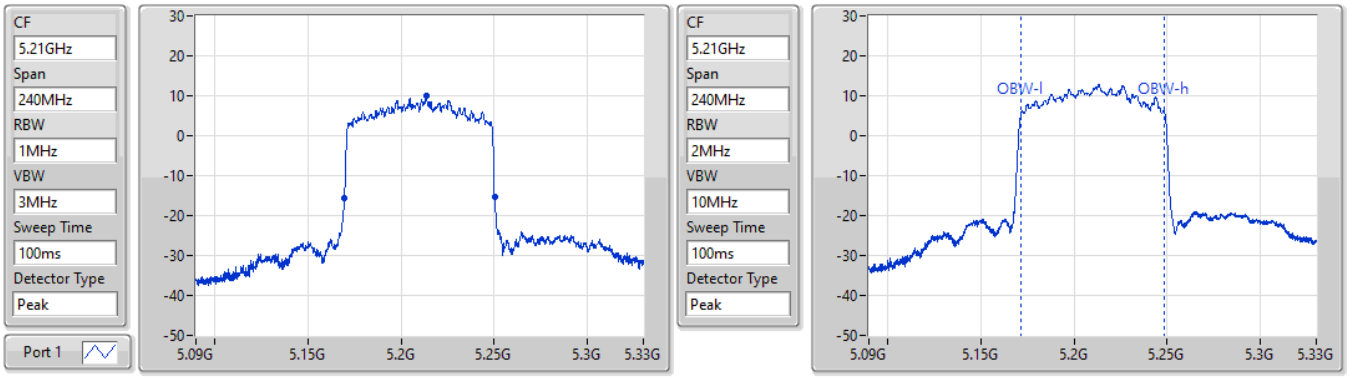


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.16968G	5.2502G	77.121M	5.171619G	5.248741G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5290MHz

19/05/2022

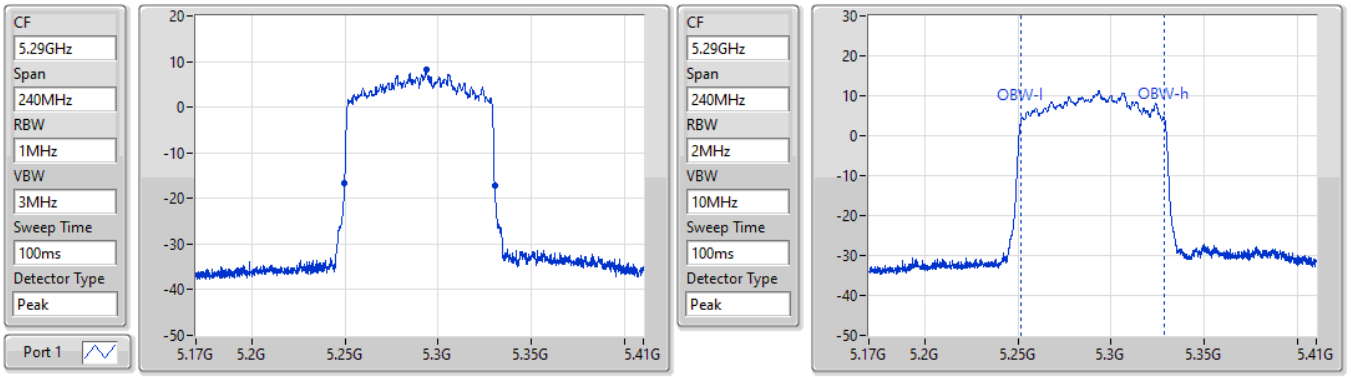


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.24968G	5.3302G	77.001M	5.251619G	5.328621G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5530MHz

19/05/2022

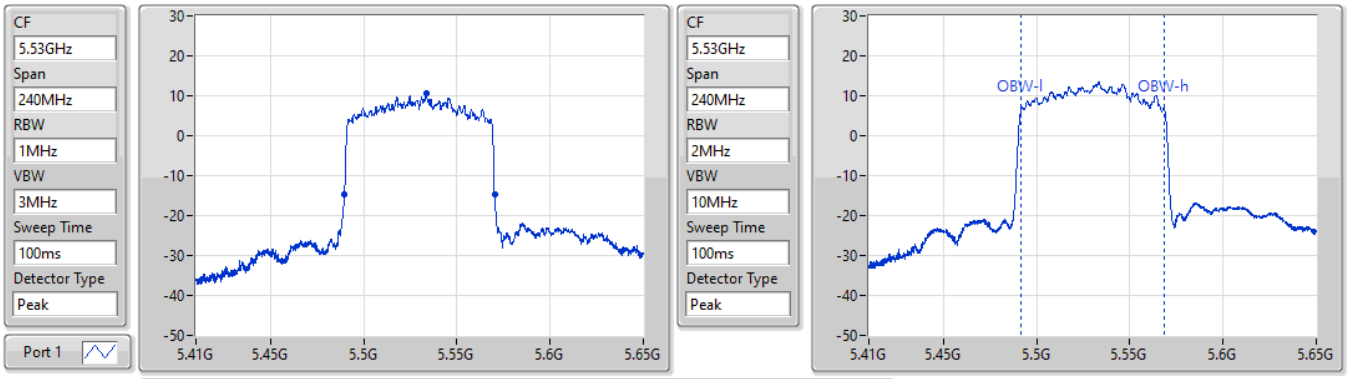


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.48968G	5.5702G	77.241M	5.491499G	5.568741G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5610MHz

19/05/2022

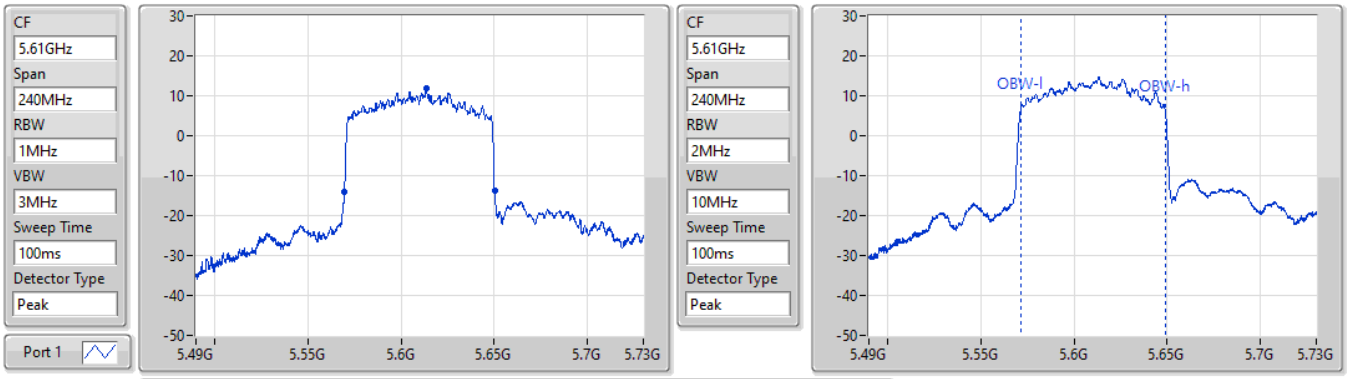


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.56968G	5.6502G	77.481M	5.571499G	5.648981G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5690MHz Straddle 5.47-5.725GHz

19/05/2022

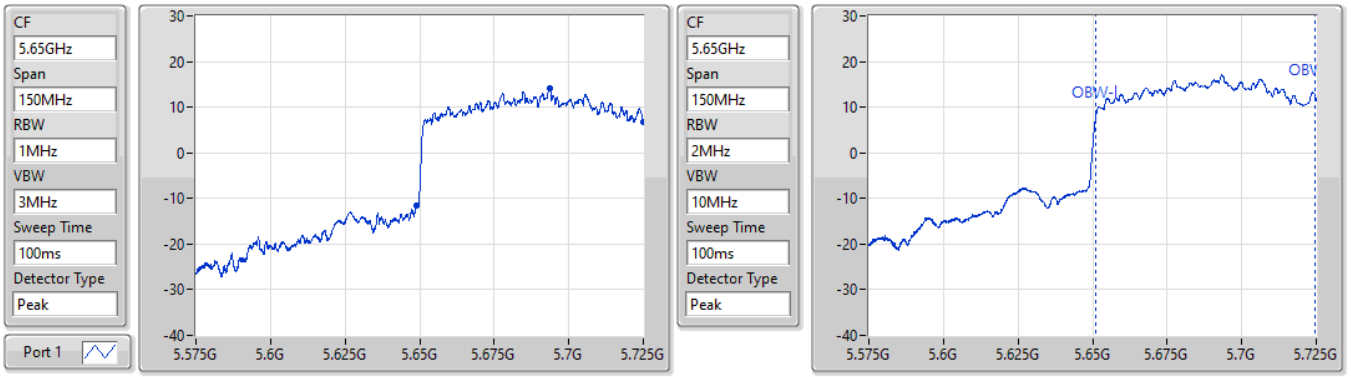


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
76.2M	5.6488G	5.725G	73.388M	5.651049G	5.724438G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5690MHz Straddle 5.725-5.85GHz

02/06/2022

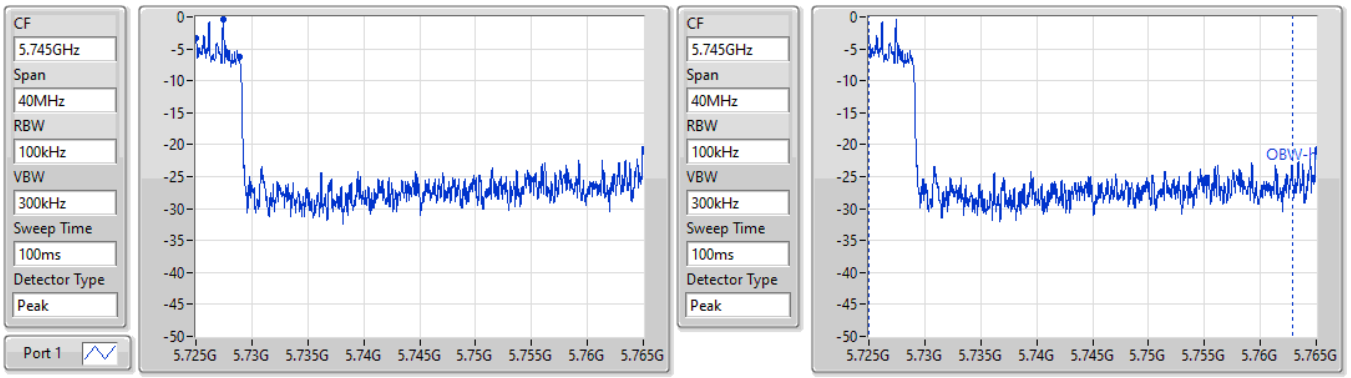


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.86M	5.725G	5.72886G	37.901M	5.72501G	5.762911G	500k	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5690MHz Straddle 5.725-5.85GHz

02/06/2022

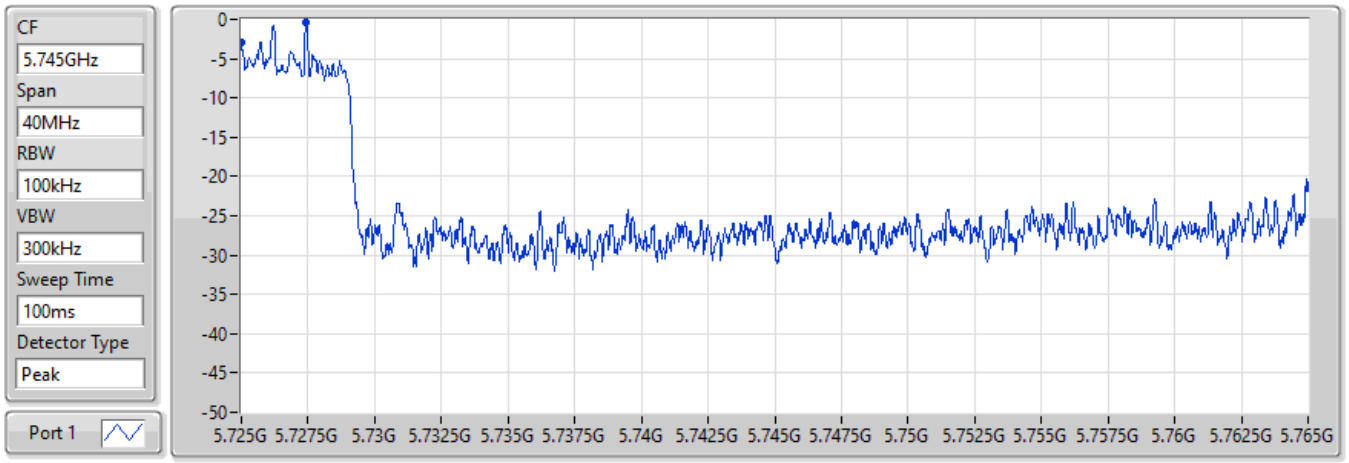


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
40M	5.725G	5.765G	Inf	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5775MHz

02/06/2022

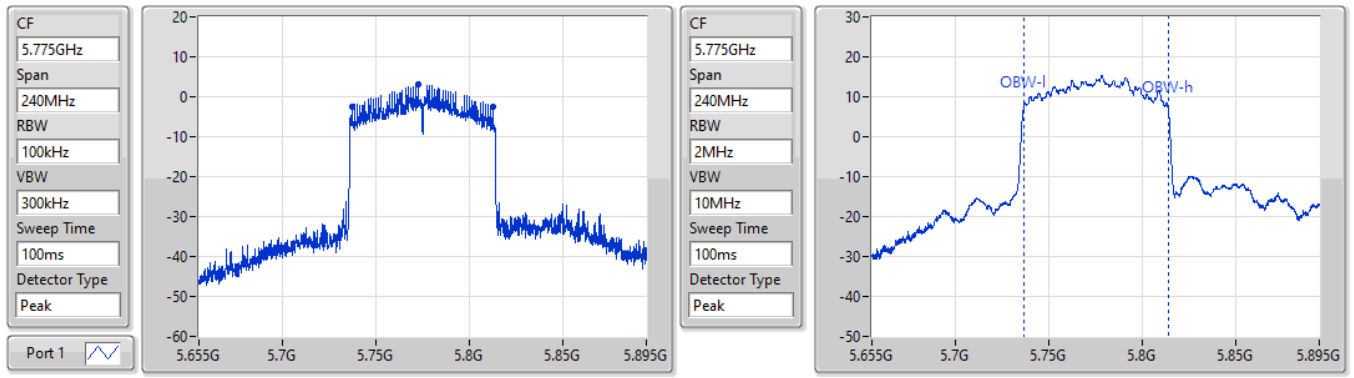


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
75M	5.73744G	5.81244G	77.601M	5.736499G	5.8141G	500k	1

802.11ax HEW80_Nss1,(MCS0)_1TX EBW

5775MHz

02/06/2022

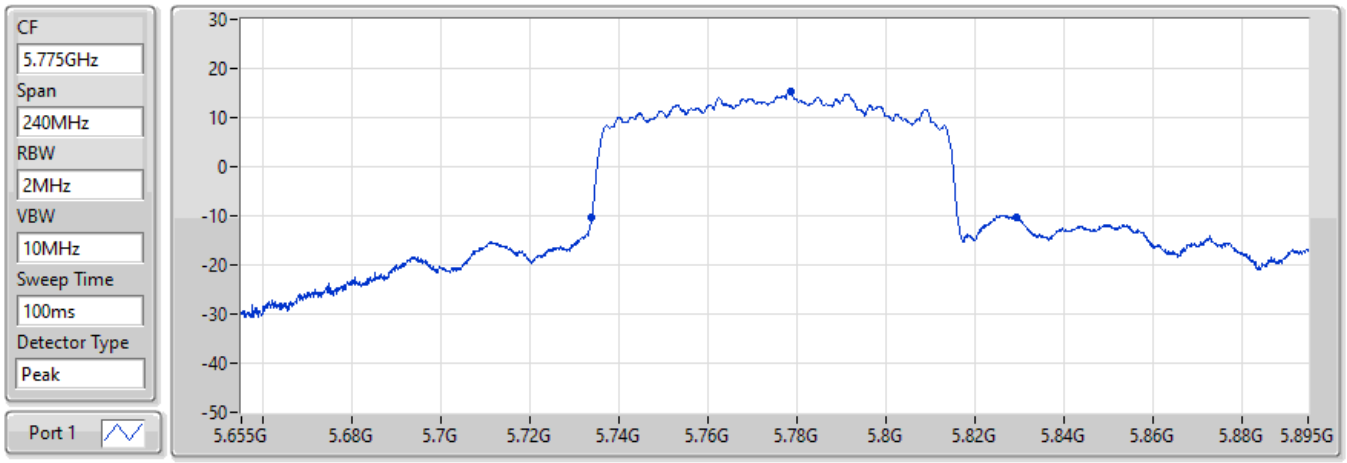


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
95.52M	5.73384G	5.82936G	Inf	1

802.11ax HEW160_Nss1,(MCS0)_1TX EBW

5250MHz Straddle 5.15-5.25GHz

19/05/2022

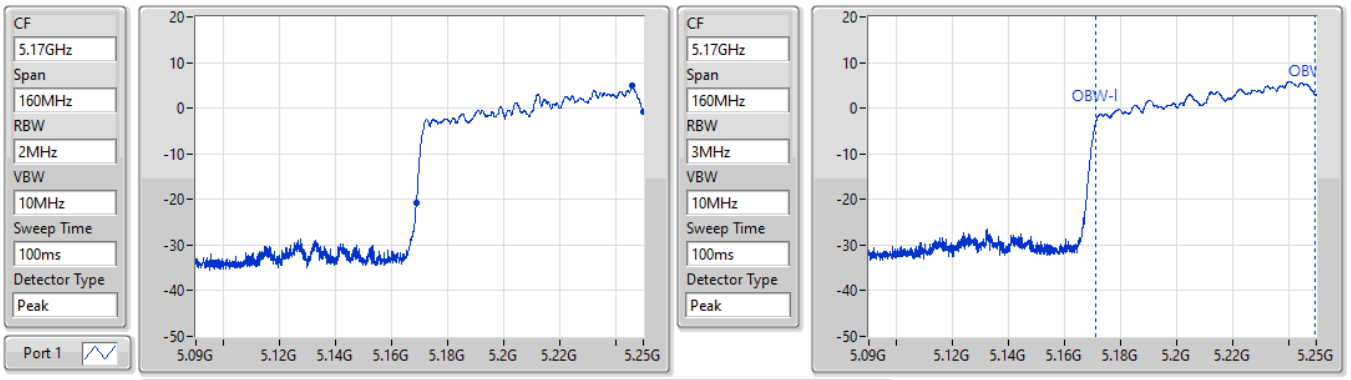


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
81.12M	5.16888G	5.25G	78.361M	5.171279G	5.24964G	Inf	1

802.11ax HEW160_Nss1,(MCS0)_1TX **EBW**

5250MHz Straddle 5.25-5.35GHz

19/05/2022

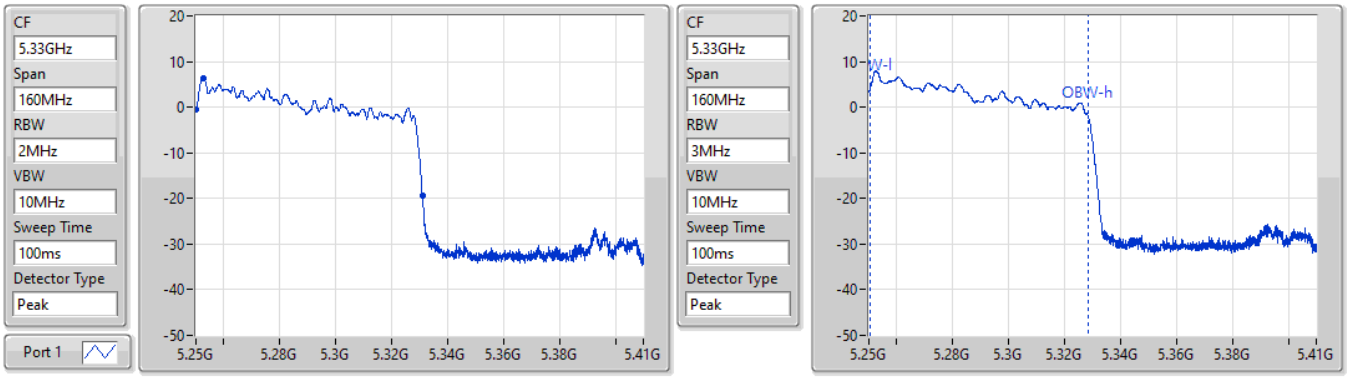


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
81.04M	5.25G	5.33104G	78.041M	5.25036G	5.328401G	Inf	1

802.11ax HEW160_Nss1,(MCS0)_1TX **EBW**

5570MHz

19/05/2022

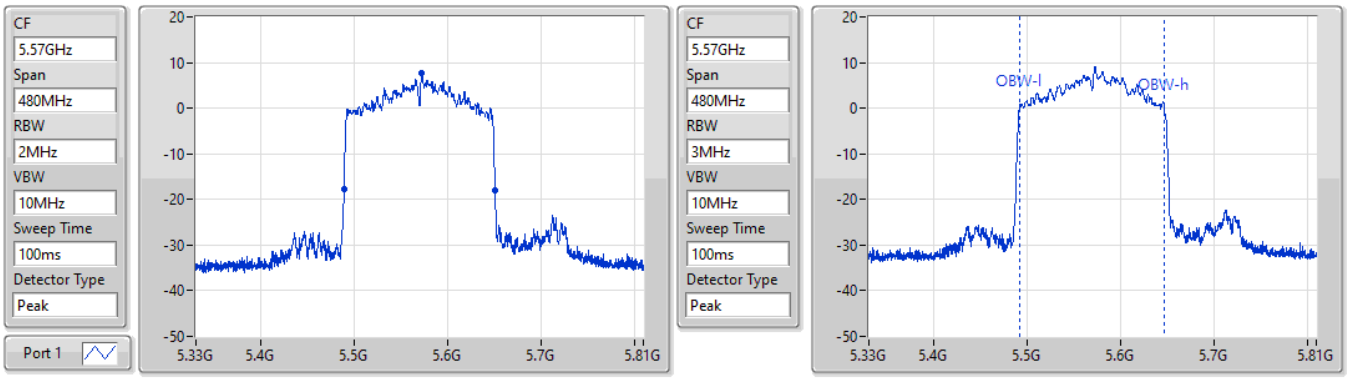

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
162M	5.48888G	5.65088G	154.963M	5.492039G	5.647001G	Inf	1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	20.22M	16.252M	16M3D1D	18.15M	16.192M
802.11ax HEW20_Nss1,(MCS0)_2TX	22.56M	18.681M	18M7D1D	20.04M	18.621M
802.11ax HEW40_Nss1,(MCS0)_2TX	71.7M	39.22M	39M2D1D	39.72M	37.421M
802.11ax HEW80_Nss1,(MCS0)_2TX	80.52M	77.121M	77M1D1D	80.28M	77.001M
802.11ax HEW160_Nss1,(MCS0)_2TX	81.2M	78.361M	78M4D1D	81.2M	78.281M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	18.48M	16.192M	16M2D1D	17.88M	16.162M
802.11ax HEW20_Nss1,(MCS0)_2TX	22.56M	18.651M	18M7D1D	20.01M	18.591M
802.11ax HEW40_Nss1,(MCS0)_2TX	71.7M	39.04M	39M0D1D	39.72M	37.301M
802.11ax HEW80_Nss1,(MCS0)_2TX	80.64M	77.001M	77M0D1D	80.4M	77.001M
802.11ax HEW160_Nss1,(MCS0)_2TX	80.96M	77.881M	77M9D1D	80.96M	77.881M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	18.48M	16.222M	16M2D1D	13.905M	13.043M
802.11ax HEW20_Nss1,(MCS0)_2TX	22.44M	18.651M	18M7D1D	14.955M	14.288M
802.11ax HEW40_Nss1,(MCS0)_2TX	71.64M	38.381M	38M4D1D	39.6M	33.828M
802.11ax HEW80_Nss1,(MCS0)_2TX	80.52M	77.121M	77M1D1D	75.225M	72.564M
802.11ax HEW160_Nss1,(MCS0)_2TX	161.76M	154.723M	155MD1D	161.76M	154.483M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	15.06M	21.949M	21M9D1D	2.54M	3.678M
802.11ax HEW20_Nss1,(MCS0)_2TX	15.09M	20.24M	20M2D1D	3.32M	4.618M
802.11ax HEW40_Nss1,(MCS0)_2TX	32.58M	48.396M	48M4D1D	3.56M	20.99M
802.11ax HEW80_Nss1,(MCS0)_2TX	75.12M	75.322M	75M3D1D	2.92M	26.907M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	20.22M	16.252M	18.33M	16.222M
5200MHz	Pass	Inf	18.36M	16.192M	18.27M	16.192M
5240MHz	Pass	Inf	18.15M	16.192M	18.45M	16.192M
5260MHz	Pass	Inf	18.09M	16.192M	18.48M	16.192M
5300MHz	Pass	Inf	18.12M	16.192M	18.36M	16.162M
5320MHz	Pass	Inf	17.88M	16.162M	18.3M	16.162M
5500MHz	Pass	Inf	17.97M	16.162M	18.48M	16.192M
5580MHz	Pass	Inf	18.06M	16.162M	18.48M	16.222M
5700MHz	Pass	Inf	18M	16.132M	18.3M	16.192M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	13.905M	13.058M	13.95M	13.043M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.76M	3.678M	2.54M	4.438M
5745MHz	Pass	500k	15.03M	20.12M	15.03M	21.949M
5785MHz	Pass	500k	15.03M	19.94M	15.06M	21.349M
5825MHz	Pass	500k	15.03M	19.13M	15.06M	17.211M
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	22.56M	18.651M	22.47M	18.651M
5200MHz	Pass	Inf	22.53M	18.651M	20.04M	18.621M
5240MHz	Pass	Inf	22.5M	18.681M	22.29M	18.621M
5260MHz	Pass	Inf	20.01M	18.591M	22.47M	18.621M
5300MHz	Pass	Inf	22.56M	18.651M	20.07M	18.621M
5320MHz	Pass	Inf	20.07M	18.621M	20.01M	18.591M
5500MHz	Pass	Inf	20.01M	18.621M	20.07M	18.621M
5580MHz	Pass	Inf	22.44M	18.651M	22.38M	18.651M
5700MHz	Pass	Inf	20.04M	18.561M	20.01M	18.621M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	14.955M	14.288M	14.97M	14.288M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.32M	4.638M	3.48M	4.618M
5745MHz	Pass	500k	15.06M	19.43M	15.03M	19.85M
5785MHz	Pass	500k	15.09M	19.88M	15.06M	20.24M
5825MHz	Pass	500k	15.06M	19.16M	15.06M	18.861M
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	39.72M	37.421M	39.72M	37.421M
5230MHz	Pass	Inf	71.7M	39.04M	62.94M	39.22M
5270MHz	Pass	Inf	71.7M	38.741M	65.52M	39.04M
5310MHz	Pass	Inf	39.72M	37.301M	39.72M	37.361M
5510MHz	Pass	Inf	39.78M	37.361M	39.66M	37.361M
5550MHz	Pass	Inf	71.64M	38.381M	61.8M	38.201M
5670MHz	Pass	Inf	39.78M	37.421M	39.6M	37.421M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	48.895M	34.073M	39.725M	33.828M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.56M	22.849M	3.58M	20.99M
5755MHz	Pass	500k	32.58M	48.396M	32.52M	41.139M
5795MHz	Pass	500k	31.32M	46.117M	32.52M	41.679M
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	80.52M	77.121M	80.28M	77.001M
5290MHz	Pass	Inf	80.64M	77.001M	80.4M	77.001M
5530MHz	Pass	Inf	80.52M	77.121M	80.4M	77.001M
5610MHz	Pass	Inf	80.52M	77.001M	80.28M	77.001M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	75.3M	72.564M	75.225M	72.939M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	3.12M	27.426M	2.92M	26.907M
5775MHz	Pass	500k	72.48M	75.202M	75.12M	75.322M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	81.2M	78.281M	81.2M	78.361M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	80.96M	77.881M	80.96M	77.881M
5570MHz	Pass	Inf	161.76M	154.483M	161.76M	154.723M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11a_Nss1,(6Mbps)_2TX **EBW**


5180MHz

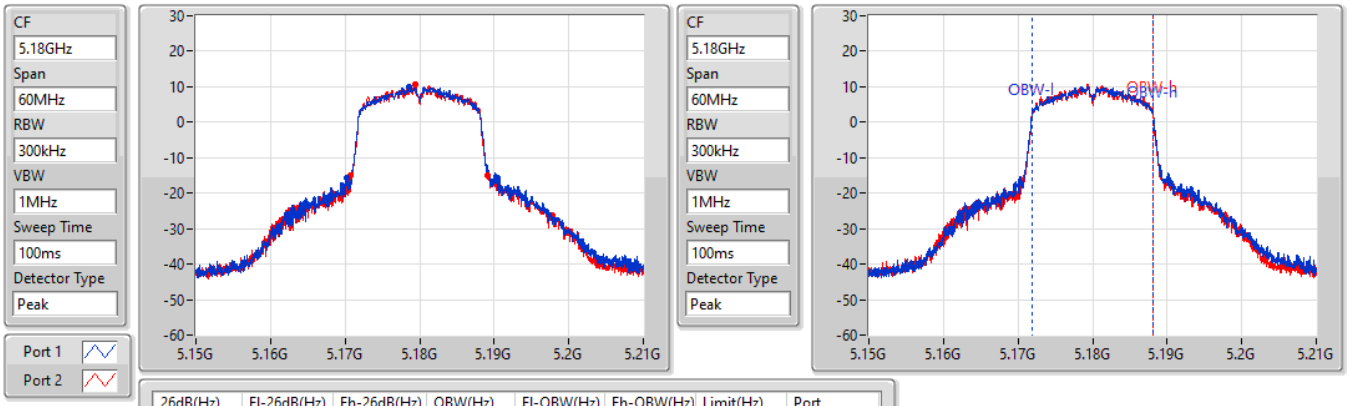

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.22M	5.17016G	5.19038G	16.252M	5.171874G	5.188126G	Inf	1
18.33M	5.17076G	5.18909G	16.222M	5.171904G	5.188126G	Inf	2

802.11a_Nss1,(6Mbps)_2TX **EBW**


5200MHz

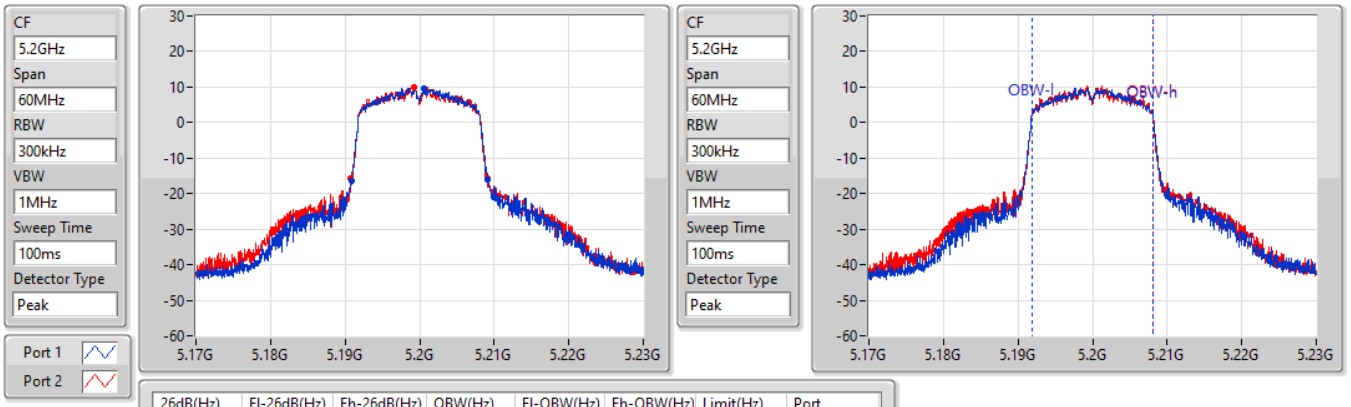

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.36M	5.19082G	5.20918G	16.192M	5.191874G	5.208066G	Inf	1
18.27M	5.19076G	5.20903G	16.192M	5.191874G	5.208066G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5240MHz

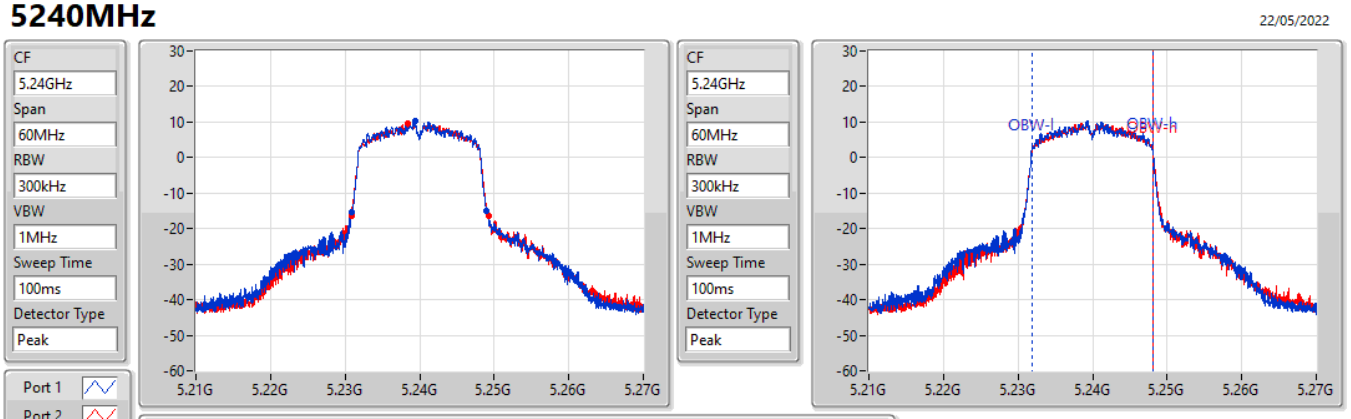

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.15M	5.23082G	5.24897G	16.192M	5.231874G	5.248066G	Inf	1
18.45M	5.23082G	5.24927G	16.192M	5.231874G	5.248066G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5260MHz

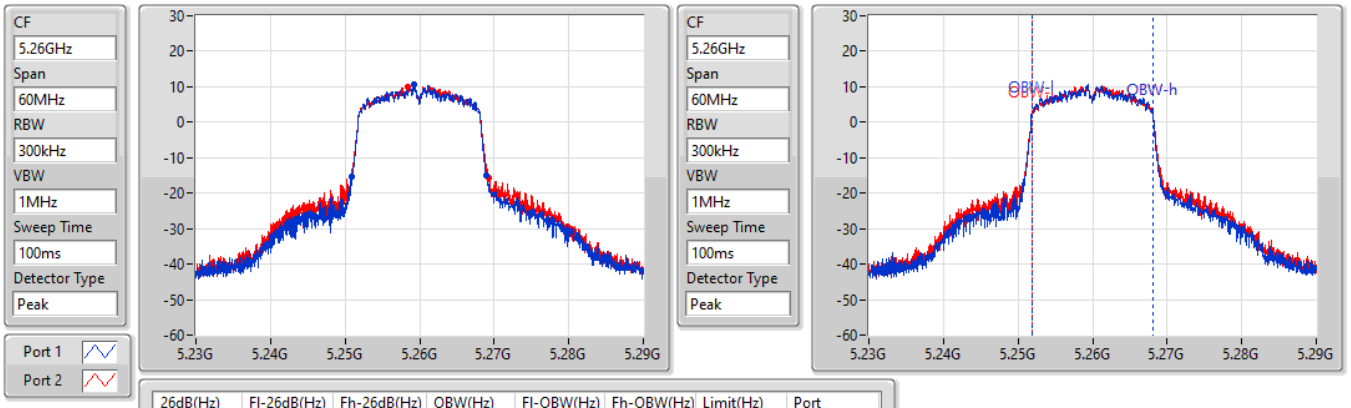

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.09M	5.25085G	5.26894G	16.192M	5.251874G	5.268066G	Inf	1
18.48M	5.25082G	5.2693G	16.192M	5.251874G	5.268066G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5300MHz

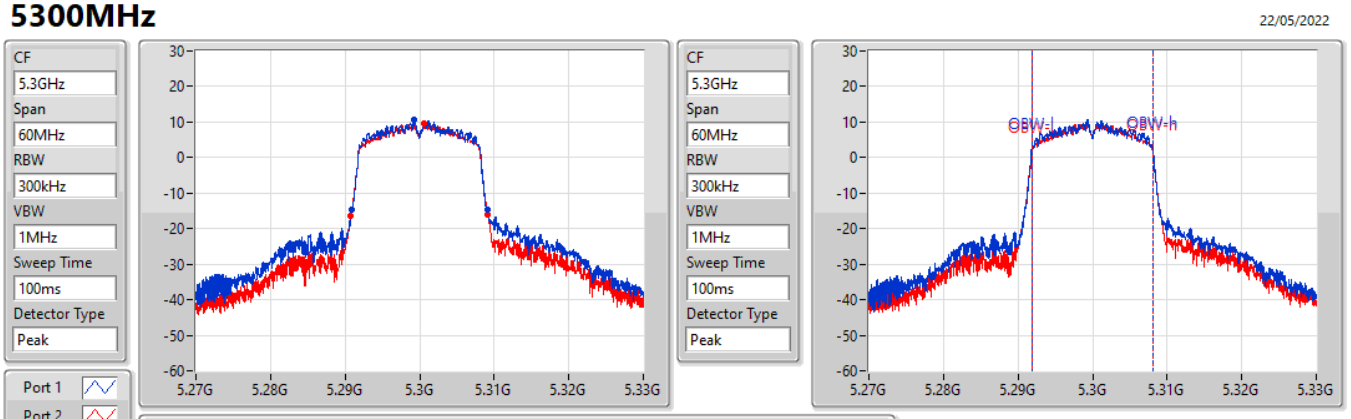

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.12M	5.29091G	5.30903G	16.192M	5.291874G	5.308066G	Inf	1
18.36M	5.29079G	5.30915G	16.162M	5.291874G	5.308036G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5320MHz

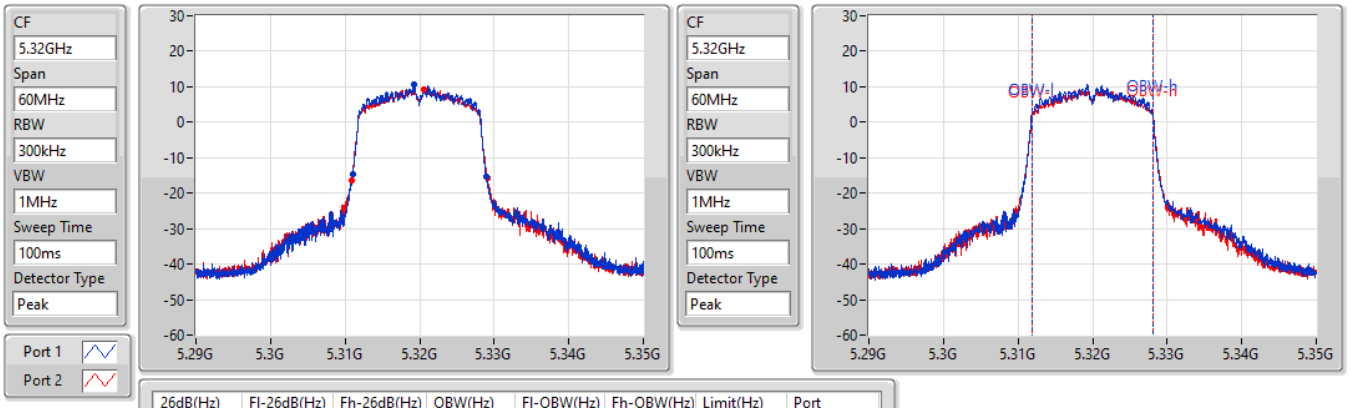

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
17.88M	5.31103G	5.32891G	16.162M	5.311874G	5.328036G	Inf	1
18.3M	5.31085G	5.32915G	16.162M	5.311874G	5.328036G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5500MHz

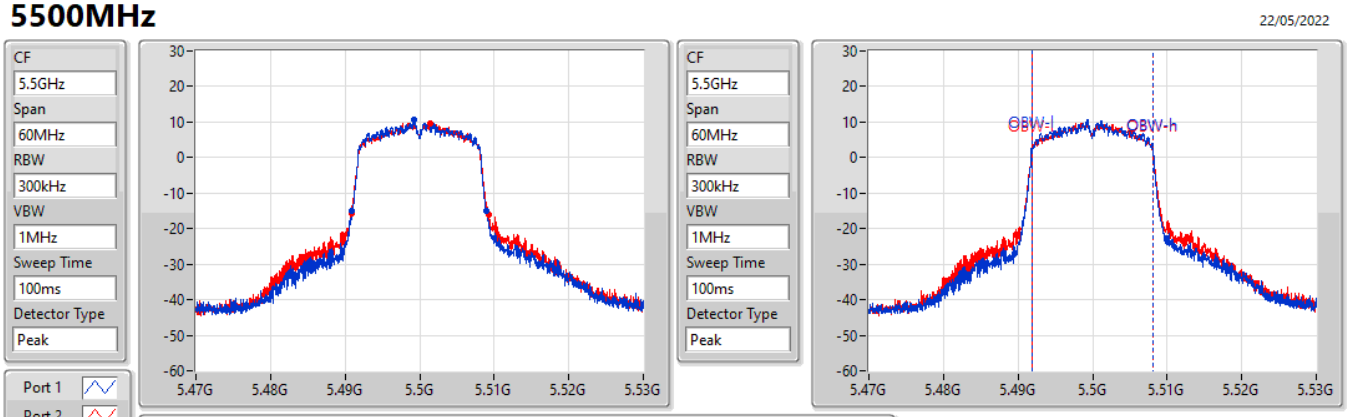

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
17.97M	5.49094G	5.50891G	16.162M	5.491874G	5.508036G	Inf	1
18.48M	5.49085G	5.50933G	16.192M	5.491874G	5.508066G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5580MHz

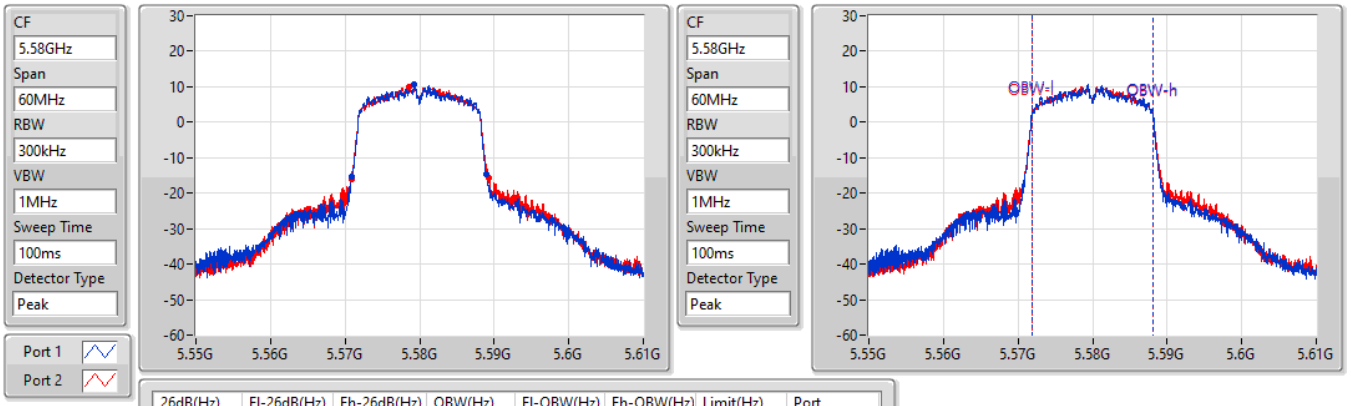

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.06M	5.57088G	5.58894G	16.162M	5.571904G	5.588066G	Inf	1
18.48M	5.57085G	5.58933G	16.222M	5.571874G	5.588096G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5700MHz

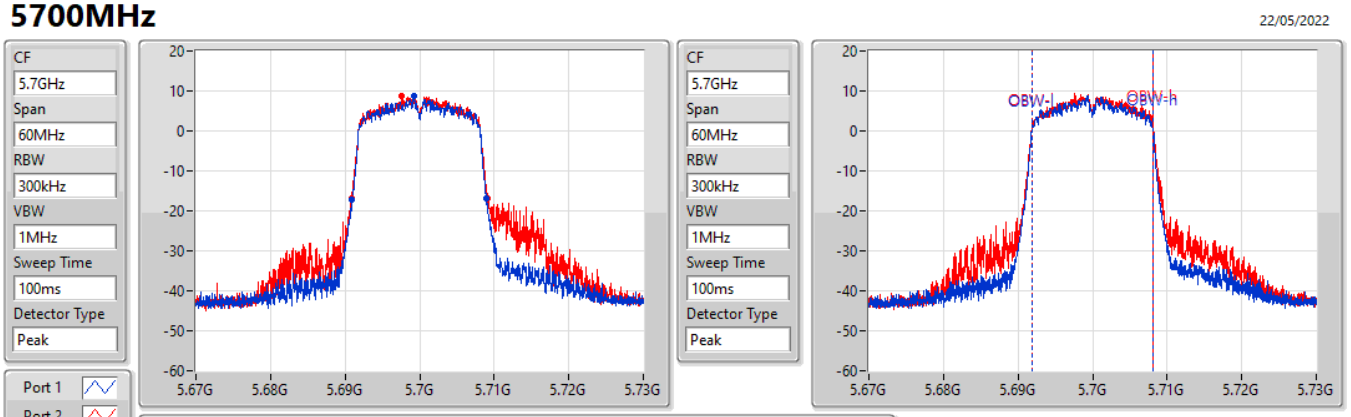

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18M	5.69097G	5.70897G	16.132M	5.691904G	5.708036G	Inf	1
18.3M	5.69082G	5.70912G	16.192M	5.691904G	5.708096G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW

5720MHz Straddle 5.47-5.725GHz

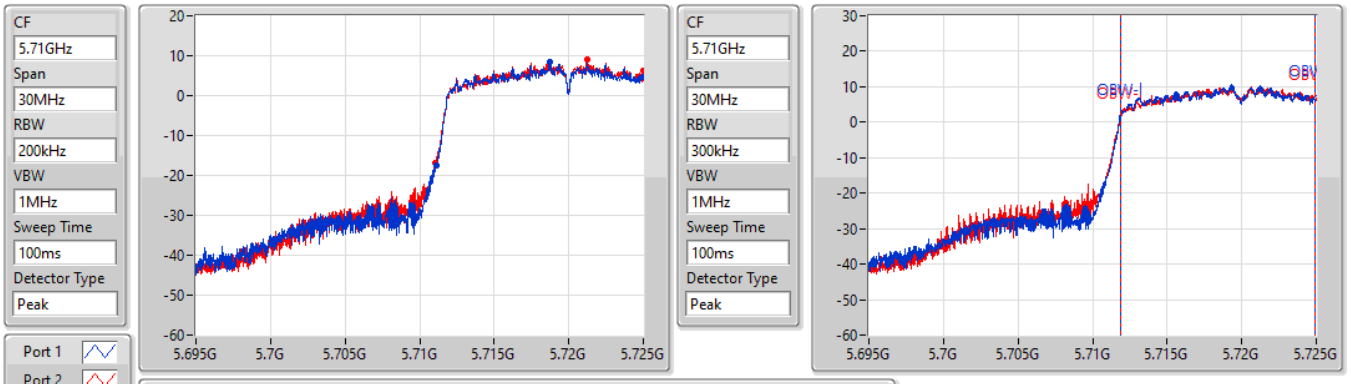


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
13.905M	5.711095G	5.725G	13.058M	5.711874G	5.724933G	Inf	1
13.95M	5.71105G	5.725G	13.043M	5.711874G	5.724918G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

02/06/2022

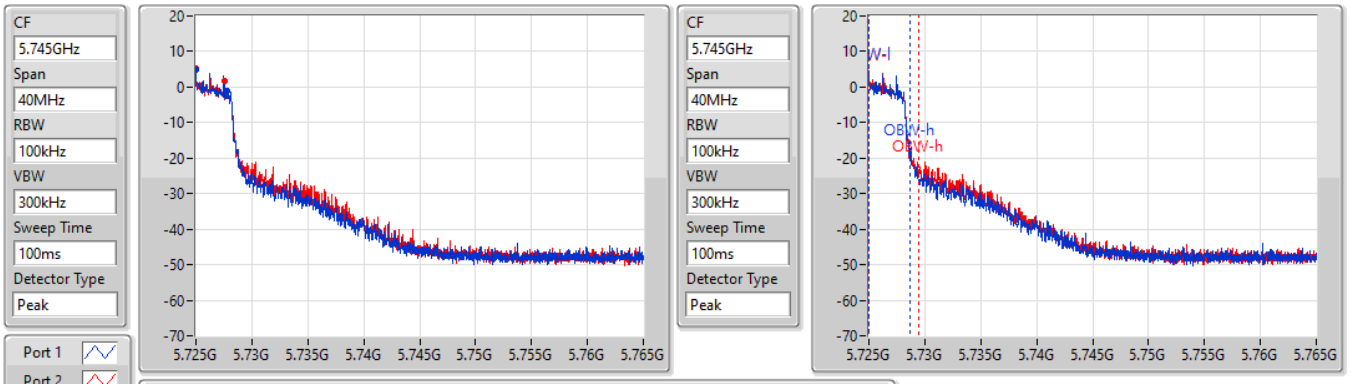


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.76M	5.725G	5.72776G	3.678M	5.72501G	5.728688G	500k	1
2.54M	5.725G	5.72754G	4.438M	5.72501G	5.729448G	500k	2

802.11a_Nss1,(6Mbps)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

02/06/2022

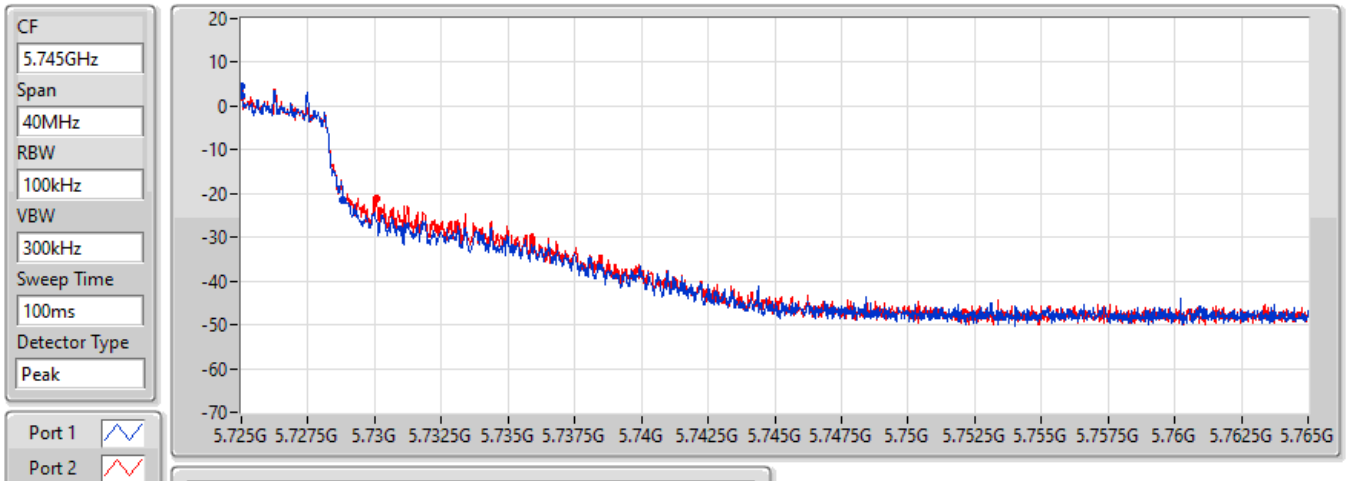


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
3.82M	5.725G	5.72882G	Inf	1
5.04M	5.725G	5.73004G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW

5745MHz

02/06/2022

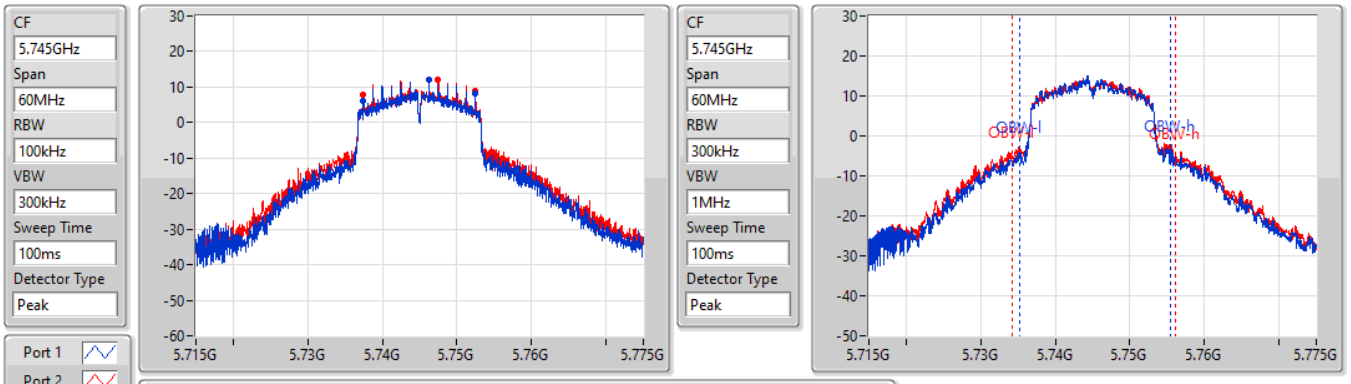


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.03M	5.73744G	5.75247G	20.12M	5.735255G	5.755375G	500k	1
15.03M	5.73747G	5.7525G	21.949M	5.734235G	5.756184G	500k	2

802.11a_Nss1,(6Mbps)_2TX EBW

5745MHz

02/06/2022

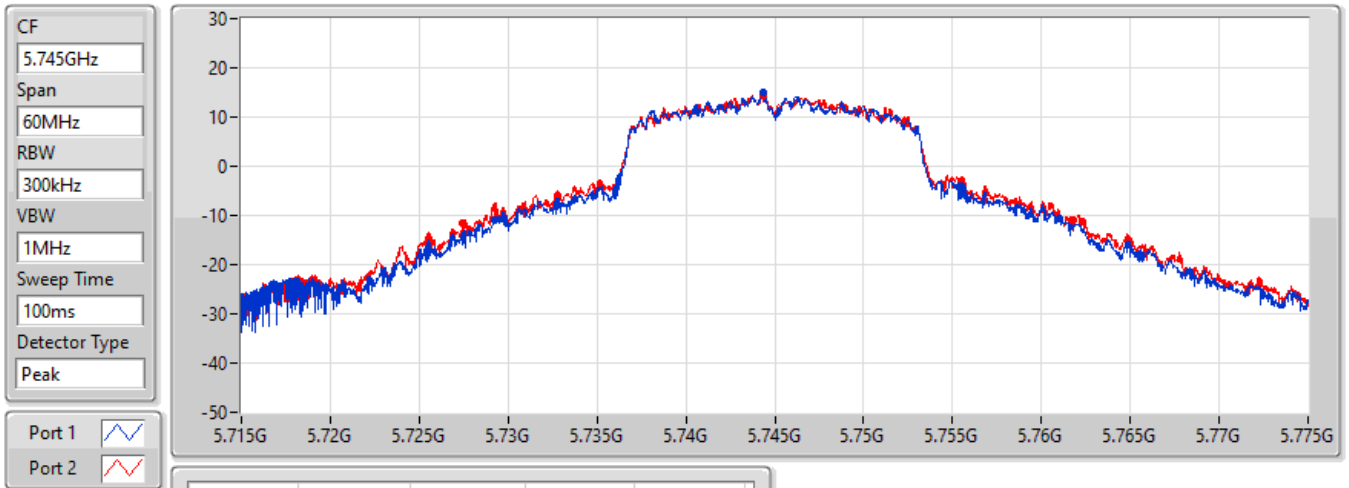


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
31.74M	5.72928G	5.76102G	Inf	1
34.89M	5.72745G	5.76234G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW

5785MHz

02/06/2022

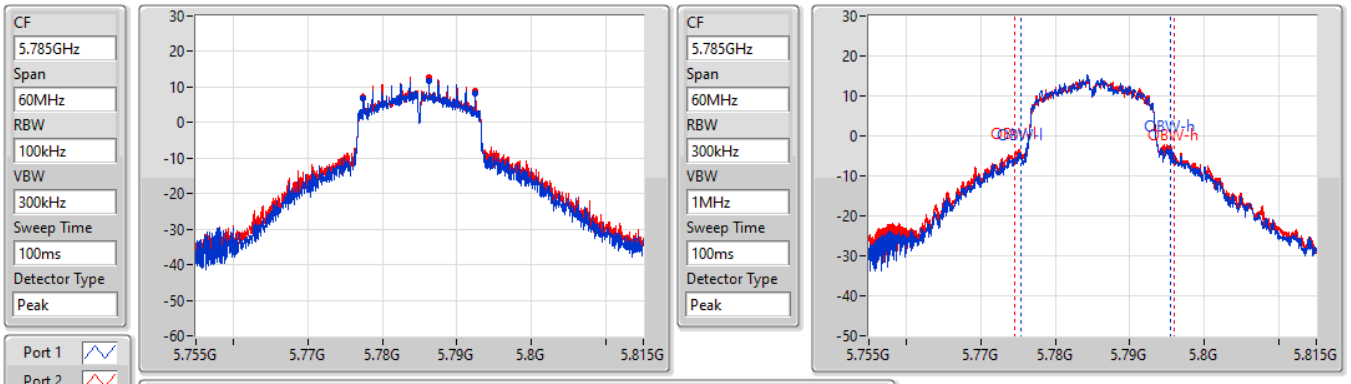


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.03M	5.77744G	5.79247G	19.94M	5.775435G	5.795375G	500k	1
15.06M	5.77744G	5.7925G	21.349M	5.774625G	5.795975G	500k	2

802.11a_Nss1,(6Mbps)_2TX EBW

5785MHz

02/06/2022

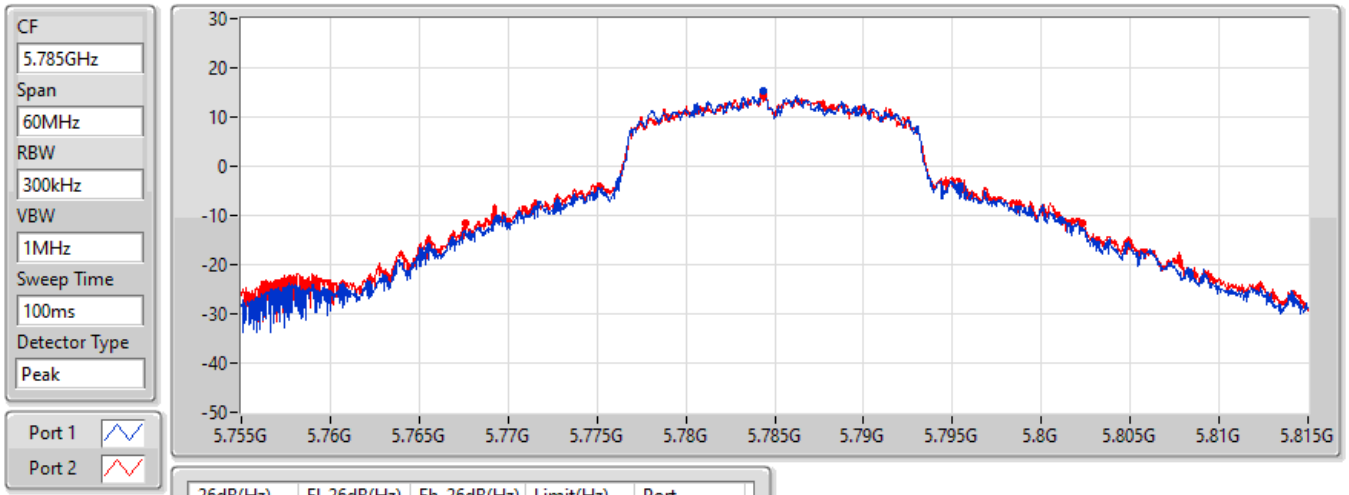


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
31.65M	5.76943G	5.80108G	Inf	1
34.74M	5.7676G	5.80234G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW

5825MHz

02/06/2022

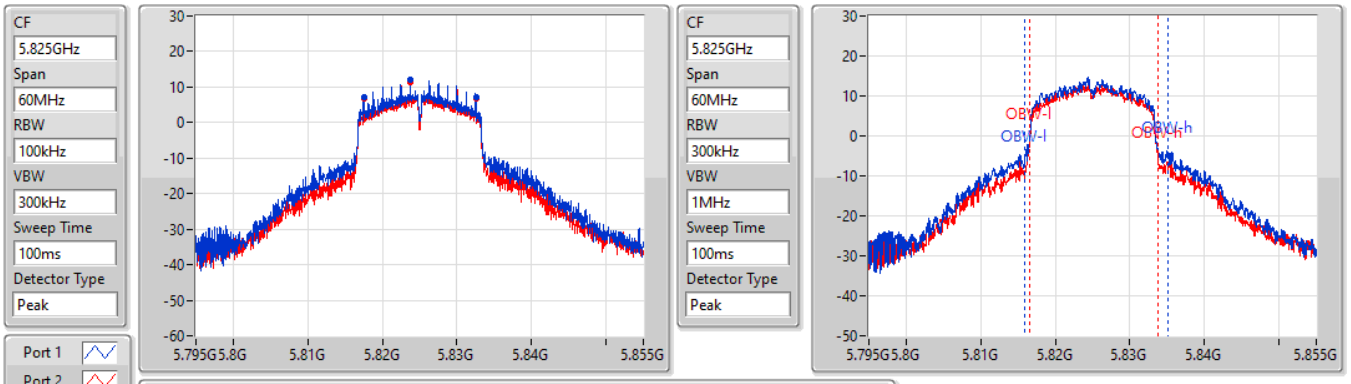


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.03M	5.8175G	5.83253G	19.13M	5.815915G	5.835045G	500k	1
15.06M	5.8175G	5.83256G	17.211M	5.816574G	5.833786G	500k	2

802.11a_Nss1,(6Mbps)_2TX EBW

5825MHz


02/06/2022

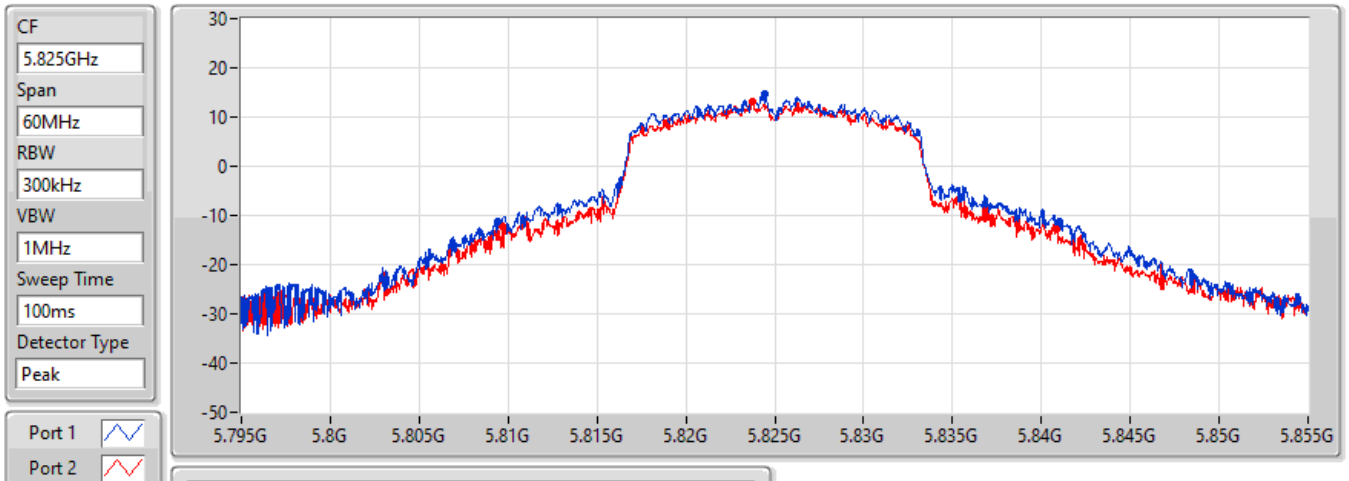

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
31.62M	5.80943G	5.84105G	Inf	1
31.2M	5.80964G	5.84084G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5180MHz

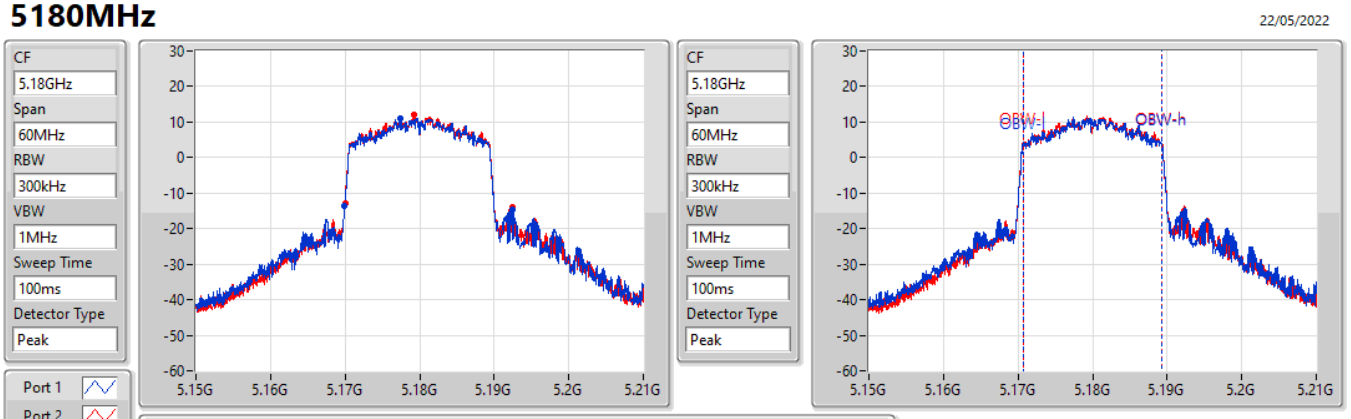

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.56M	5.16995G	5.19251G	18.651M	5.170645G	5.189295G	Inf	1
22.47M	5.16998G	5.19245G	18.651M	5.170645G	5.189295G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5200MHz

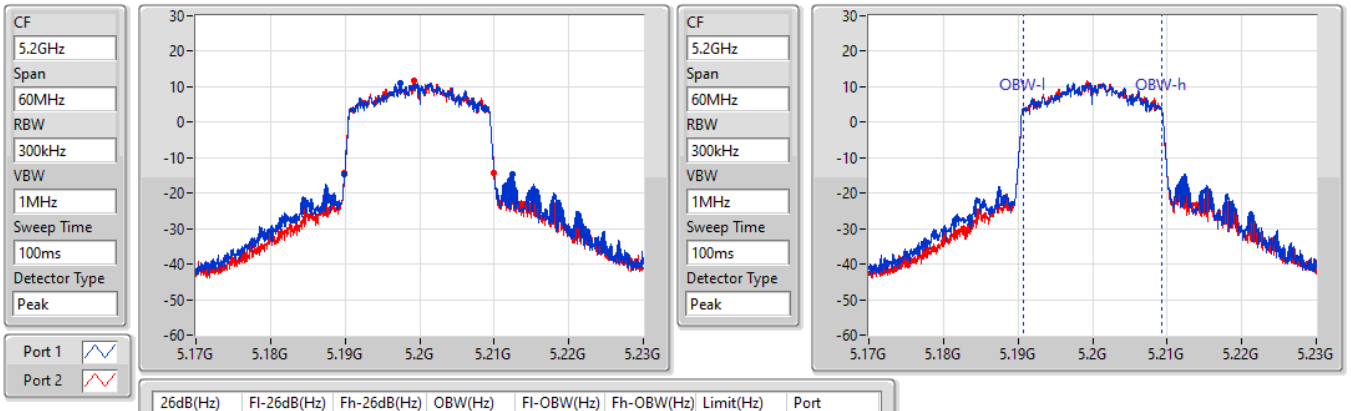


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.53M	5.18992G	5.21245G	18.651M	5.190645G	5.209295G	Inf	1
20.04M	5.18995G	5.20999G	18.621M	5.190645G	5.209265G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5240MHz

22/05/2022

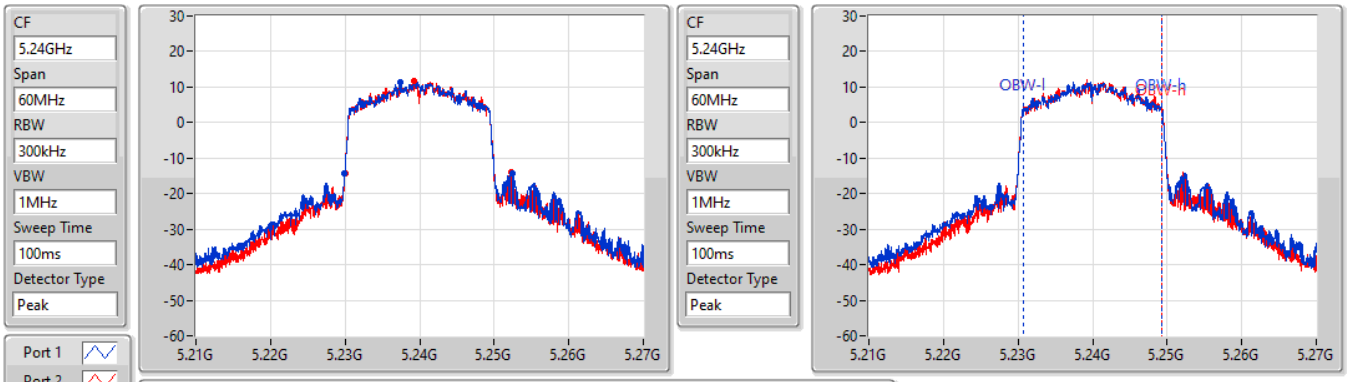


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.5M	5.22995G	5.25245G	18.681M	5.230645G	5.249325G	Inf	1
22.29M	5.22998G	5.25227G	18.621M	5.230675G	5.249295G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5260MHz


22/05/2022

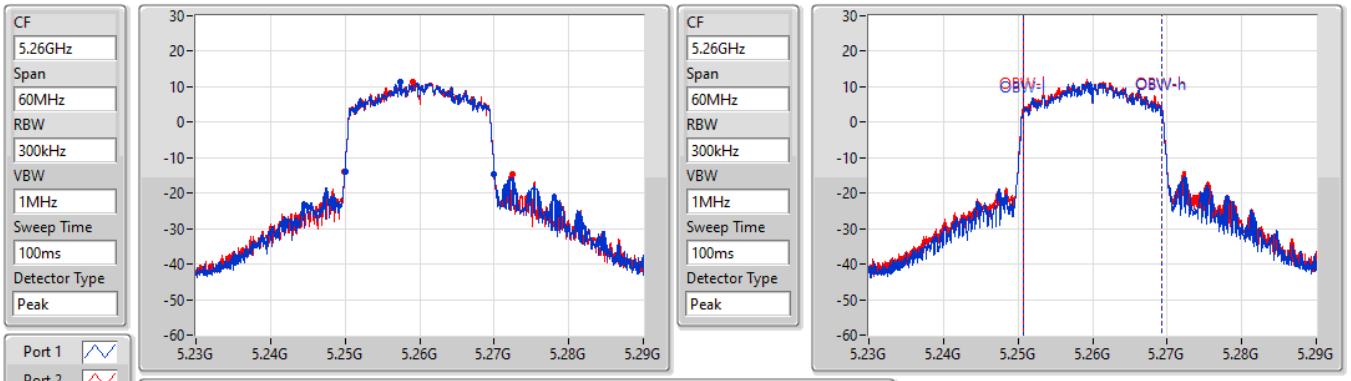

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.01M	5.24998G	5.26999G	18.591M	5.250705G	5.269295G	Inf	1
22.47M	5.24995G	5.27242G	18.621M	5.250675G	5.269295G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5300MHz

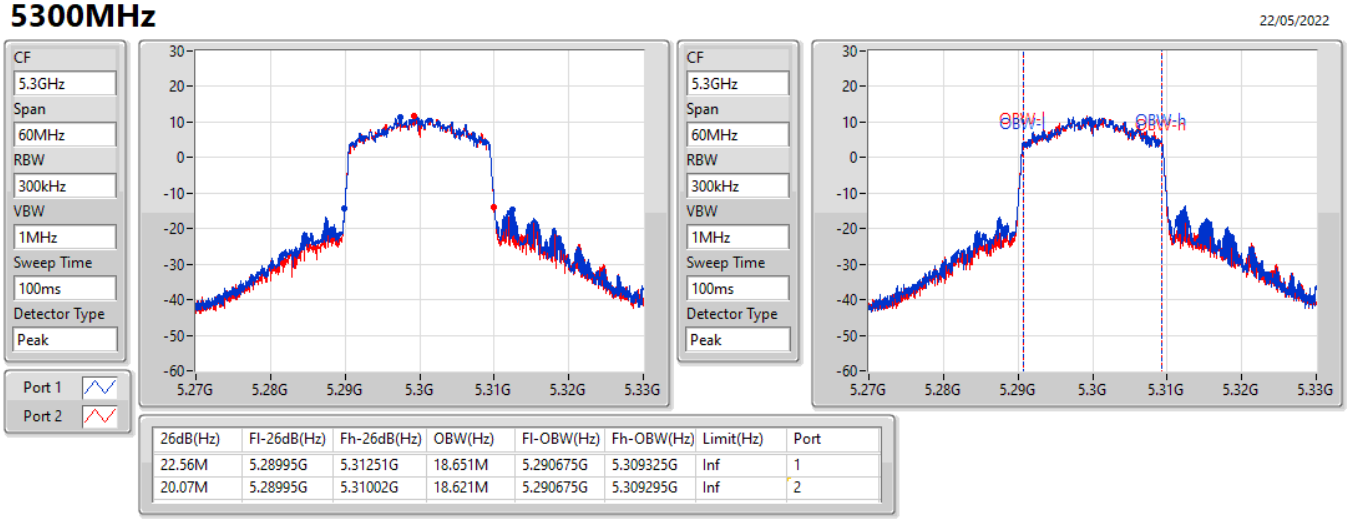

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.56M	5.28995G	5.31251G	18.651M	5.290675G	5.309325G	Inf	1
20.07M	5.28995G	5.31002G	18.621M	5.290675G	5.309295G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5320MHz

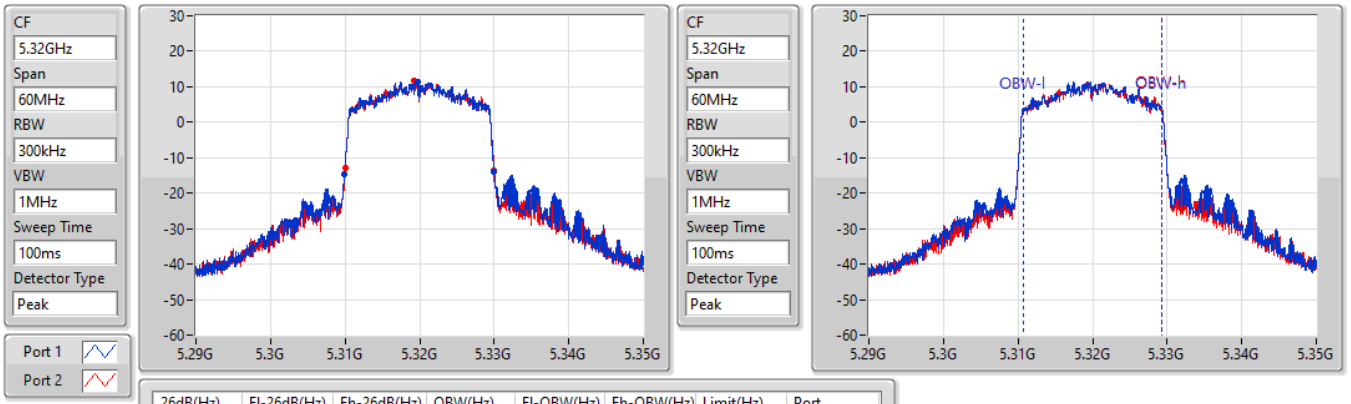

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.07M	5.30992G	5.32999G	18.621M	5.310675G	5.329295G	Inf	1
20.01M	5.30998G	5.32999G	18.591M	5.310675G	5.329265G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5500MHz

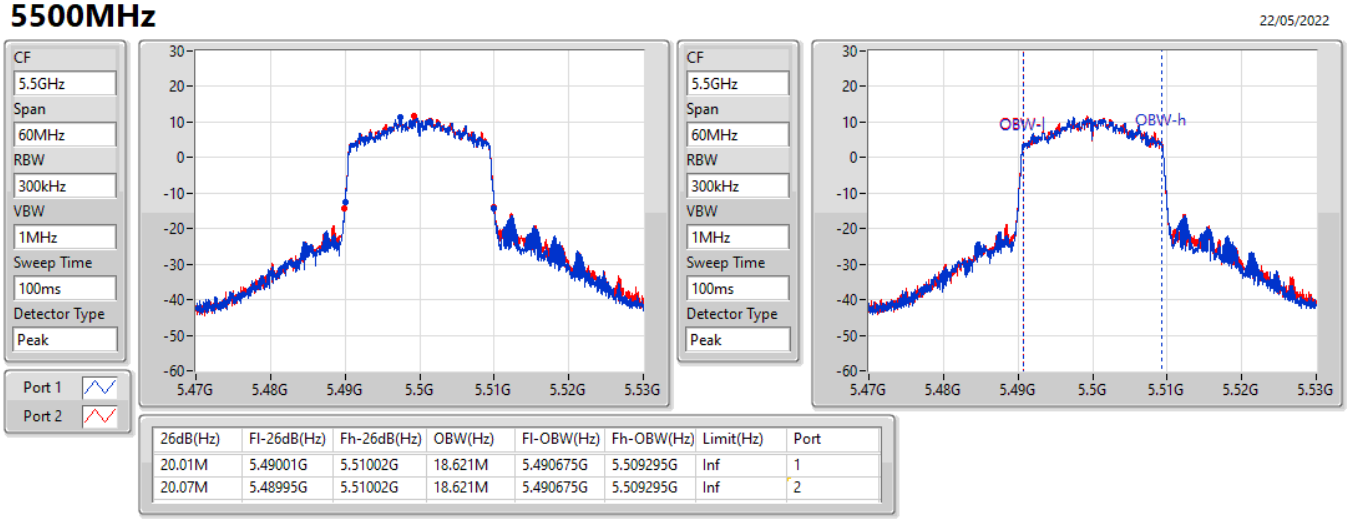

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.01M	5.49001G	5.51002G	18.621M	5.490675G	5.509295G	Inf	1
20.07M	5.48995G	5.51002G	18.621M	5.490675G	5.509295G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5580MHz

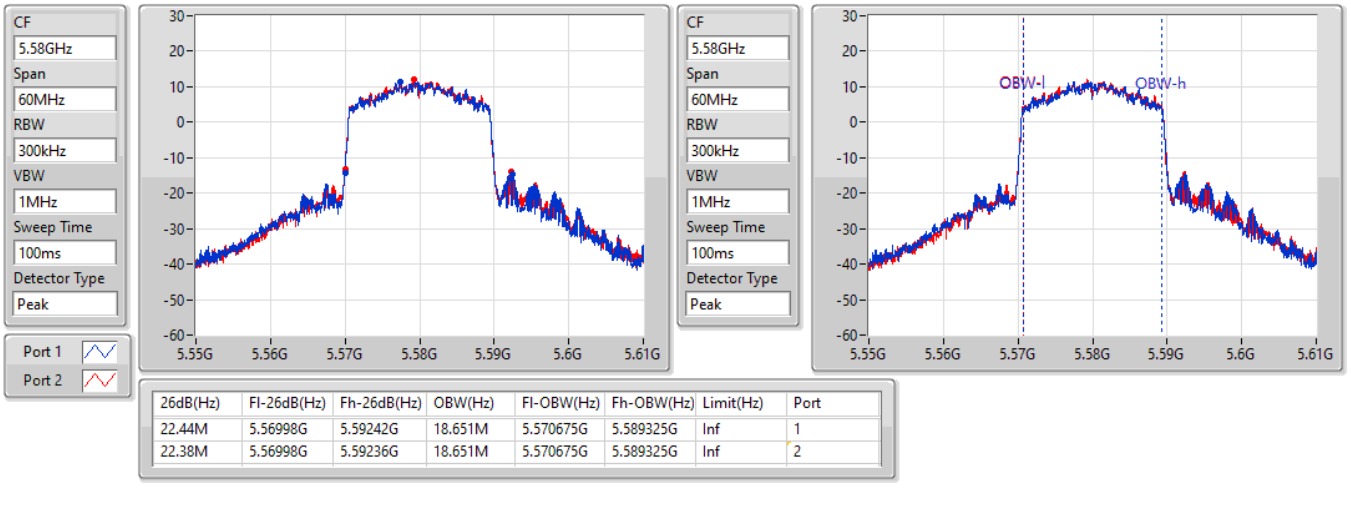


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.44M	5.56998G	5.59242G	18.651M	5.570675G	5.589325G	Inf	1
22.38M	5.56998G	5.59236G	18.651M	5.570675G	5.589325G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5700MHz

22/05/2022

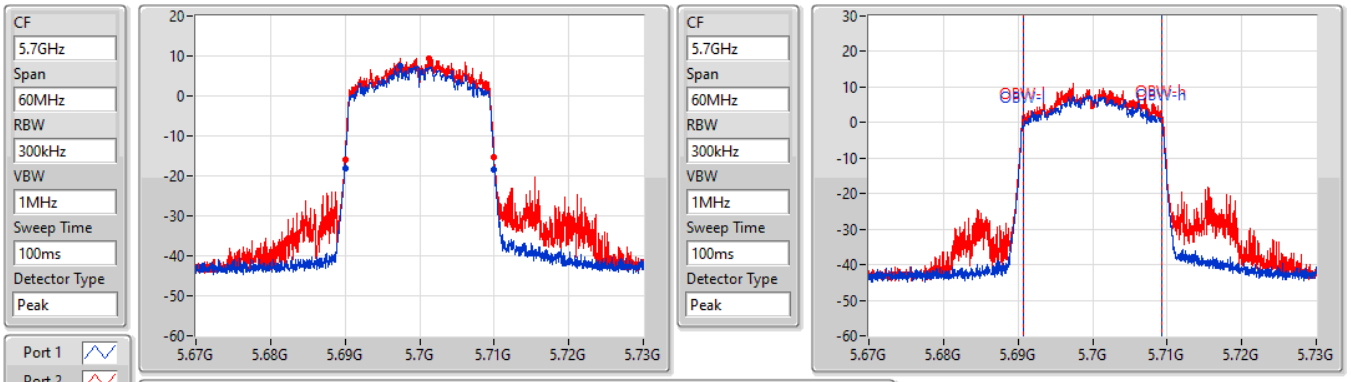


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.04M	5.68998G	5.71002G	18.561M	5.690705G	5.709265G	Inf	1
20.01M	5.68998G	5.70999G	18.621M	5.690705G	5.709325G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.47-5.725GHz

22/05/2022

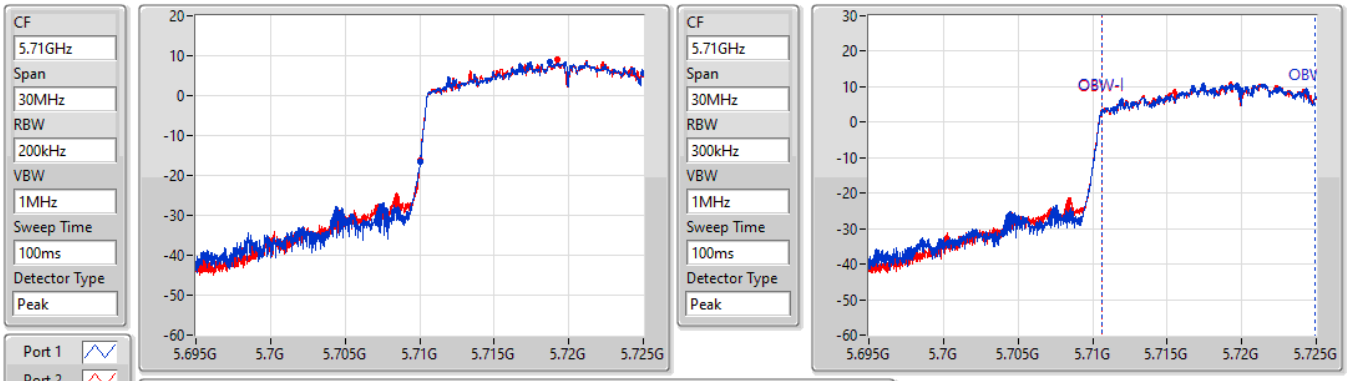


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.955M	5.710045G	5.725G	14.288M	5.710615G	5.724903G	Inf	1
14.97M	5.71003G	5.725G	14.288M	5.710615G	5.724903G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

02/06/2022

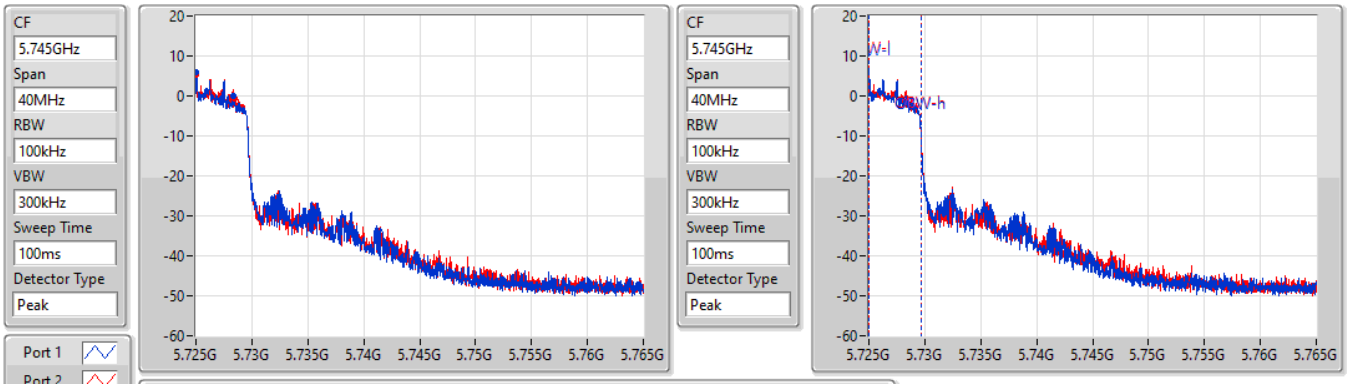


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.32M	5.725G	5.72832G	4.638M	5.72501G	5.729648G	500k	1
3.48M	5.725G	5.72848G	4.618M	5.72503G	5.729648G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

02/06/2022

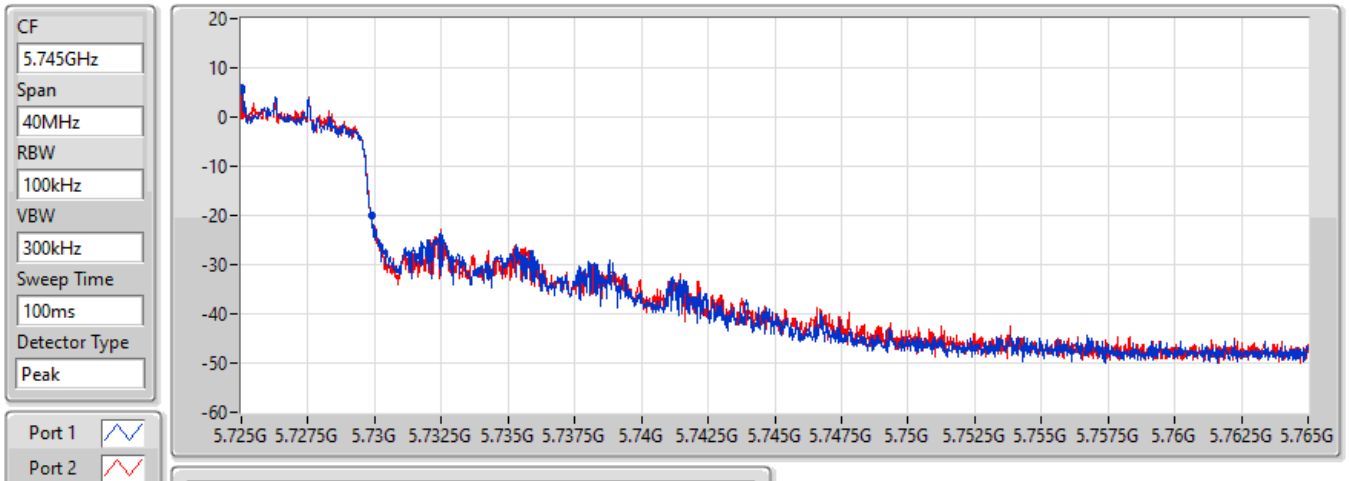


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
4.9M	5.725G	5.7299G	Inf	1
4.88M	5.725G	5.72988G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

02/06/2022

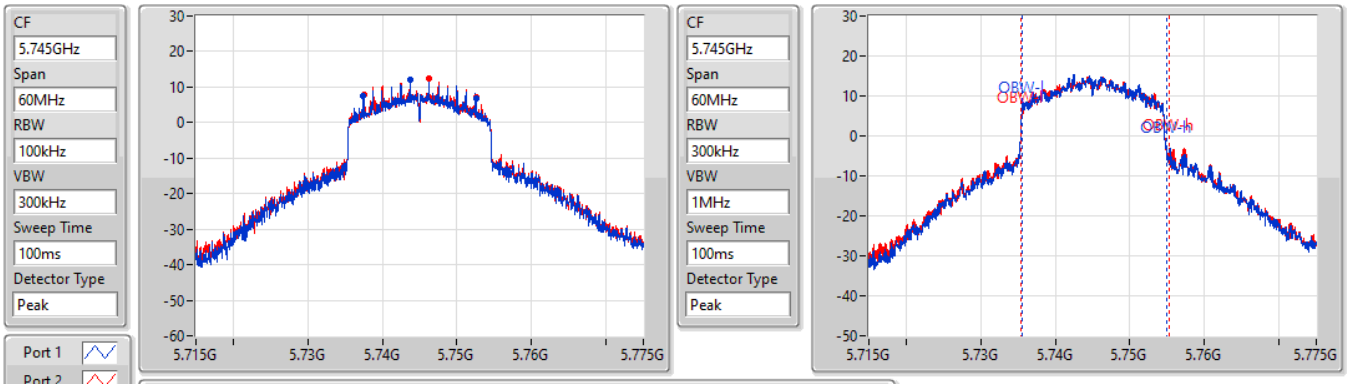


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.06M	5.73747G	5.75253G	19.43M	5.735495G	5.754925G	500k	1
15.03M	5.7375G	5.75253G	19.85M	5.735435G	5.755285G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

02/06/2022

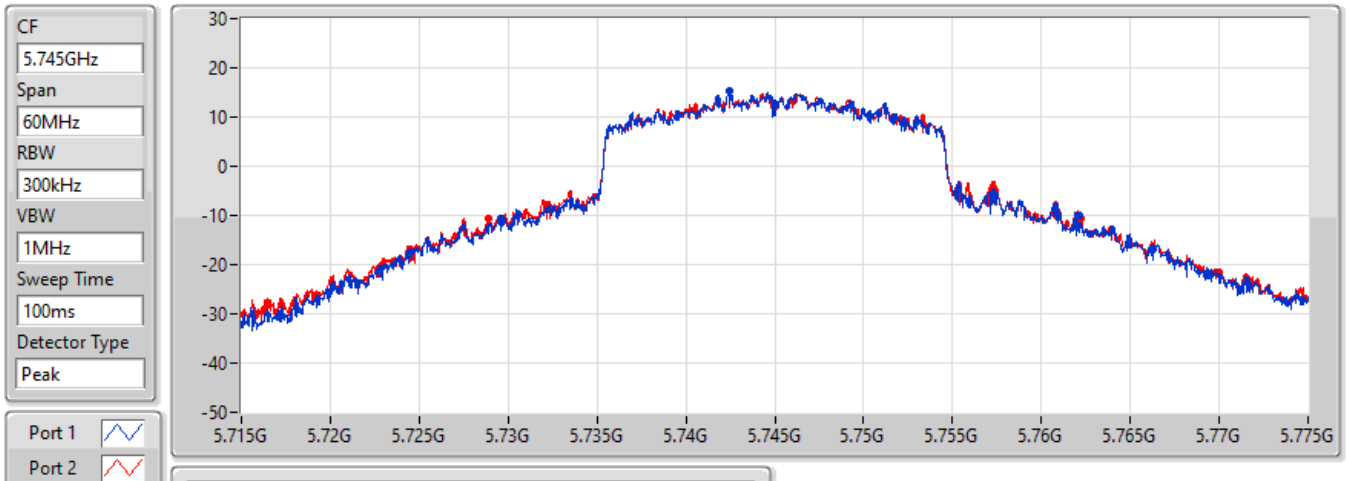


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
32.49M	5.72961G	5.7621G	Inf	1
33.27M	5.72892G	5.76219G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz

02/06/2022

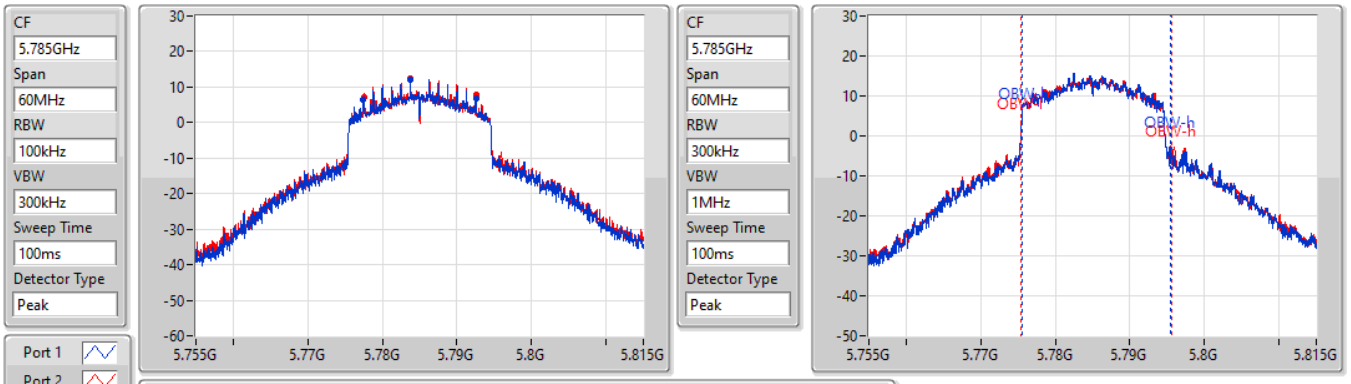


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.09M	5.77747G	5.79256G	19.88M	5.775495G	5.795375G	500k	1
15.06M	5.7775G	5.79256G	20.24M	5.7754435G	5.795675G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz

02/06/2022

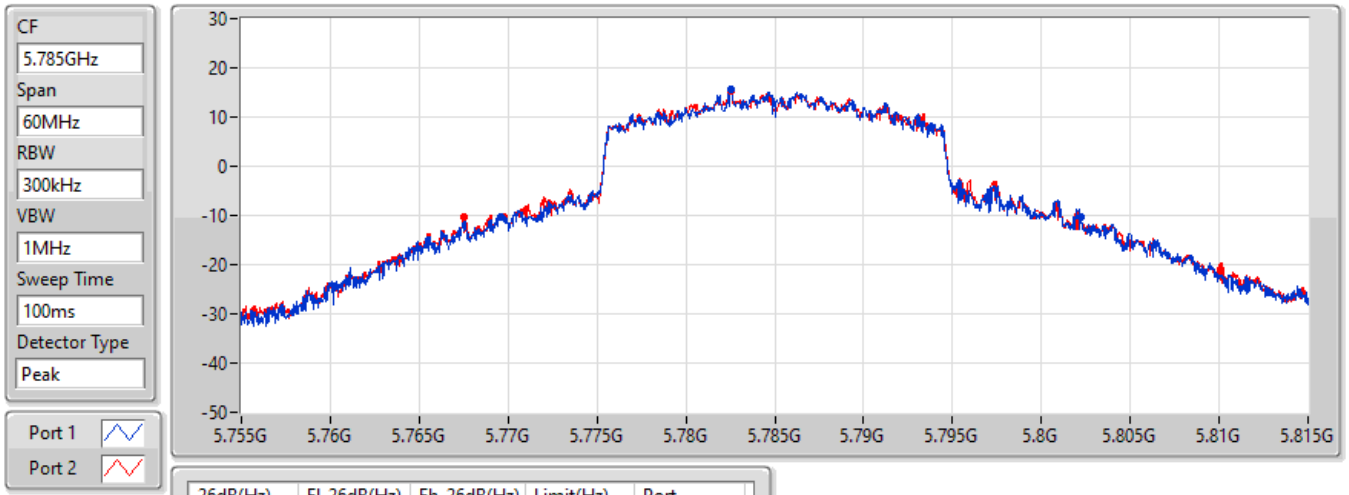


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
32.64M	5.76955G	5.80219G	Inf	1
34.68M	5.76751G	5.80219G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz

02/06/2022

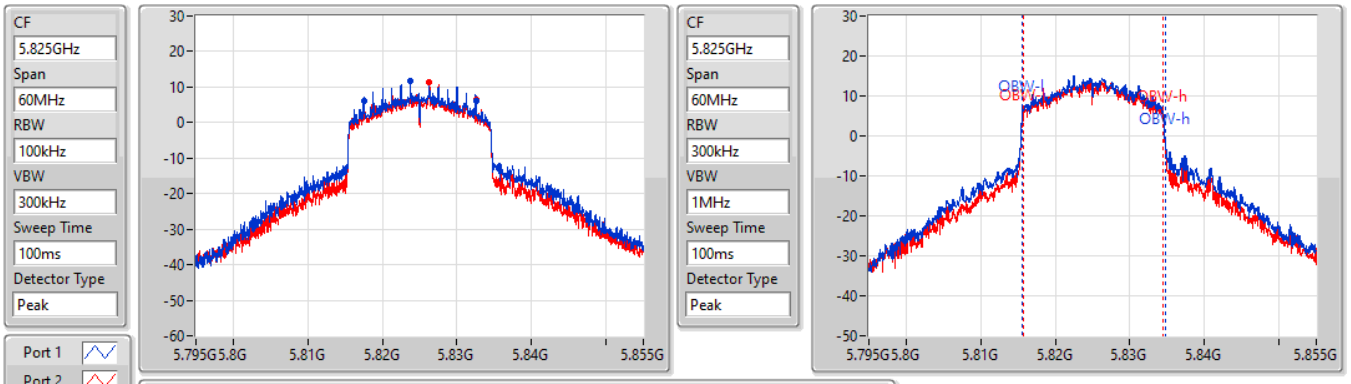


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.06M	5.8175G	5.83256G	19.16M	5.815585G	5.834745G	500k	1
15.06M	5.8175G	5.83256G	18.861M	5.815645G	5.834505G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz


02/06/2022

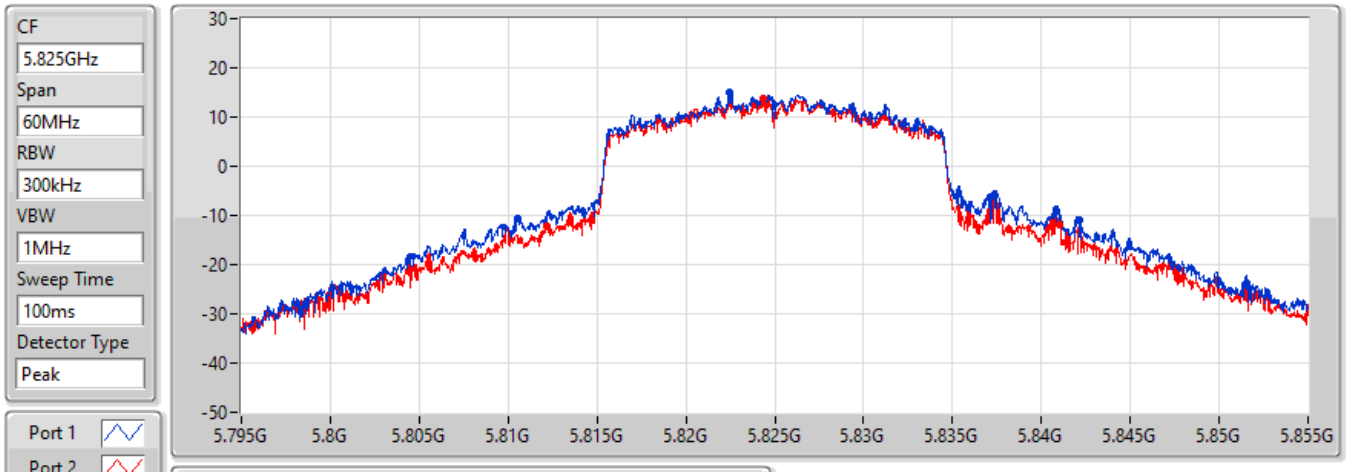

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
31.59M	5.81057G	5.84216G	Inf	1
28.86M	5.81219G	5.84105G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW


5190MHz

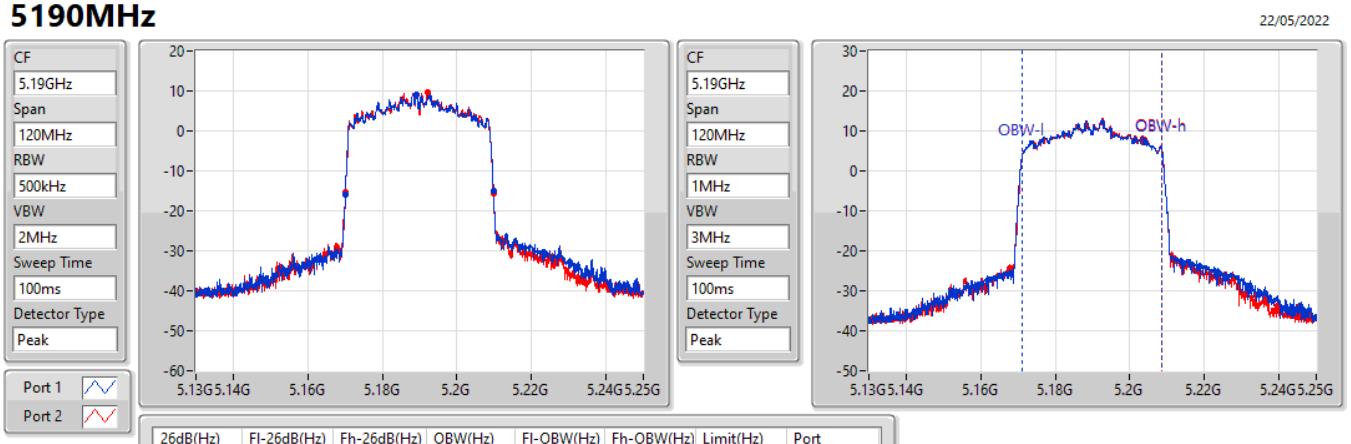

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.72M	5.17008G	5.2098G	37.421M	5.171229G	5.208651G	Inf	1
39.72M	5.17008G	5.2098G	37.421M	5.171229G	5.208651G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5230MHz

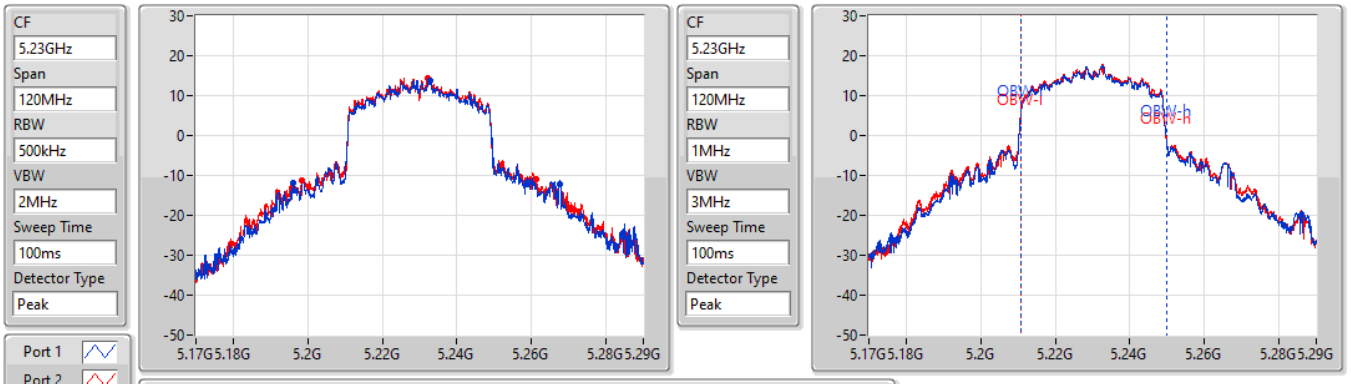


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
71.7M	5.19604G	5.26774G	39.04M	5.21069G	5.24973G	Inf	1
62.94M	5.19838G	5.26132G	39.22M	5.21063G	5.24985G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5270MHz

22/05/2022

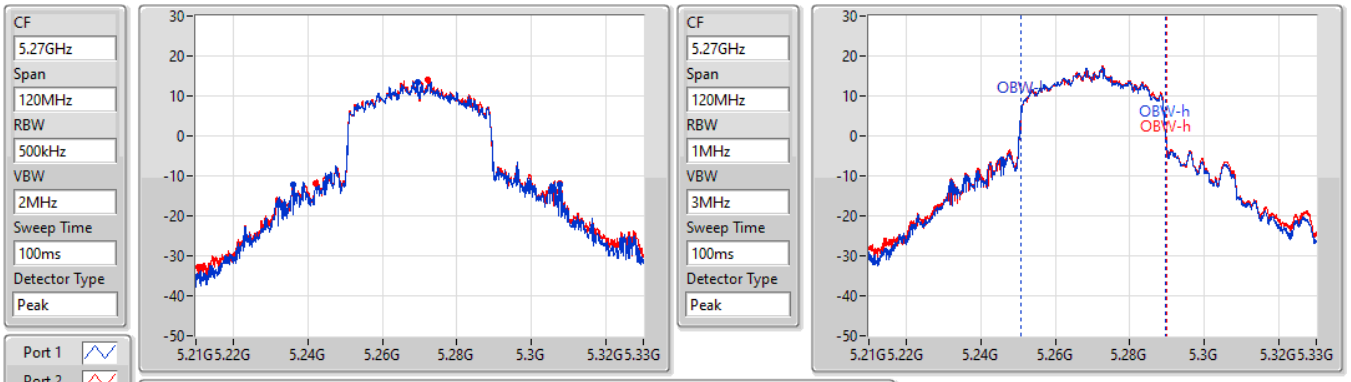


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
71.7M	5.23604G	5.30774G	38.741M	5.25087G	5.28961G	Inf	1
65.52M	5.24216G	5.30768G	39.04M	5.25081G	5.28985G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5310MHz

22/05/2022

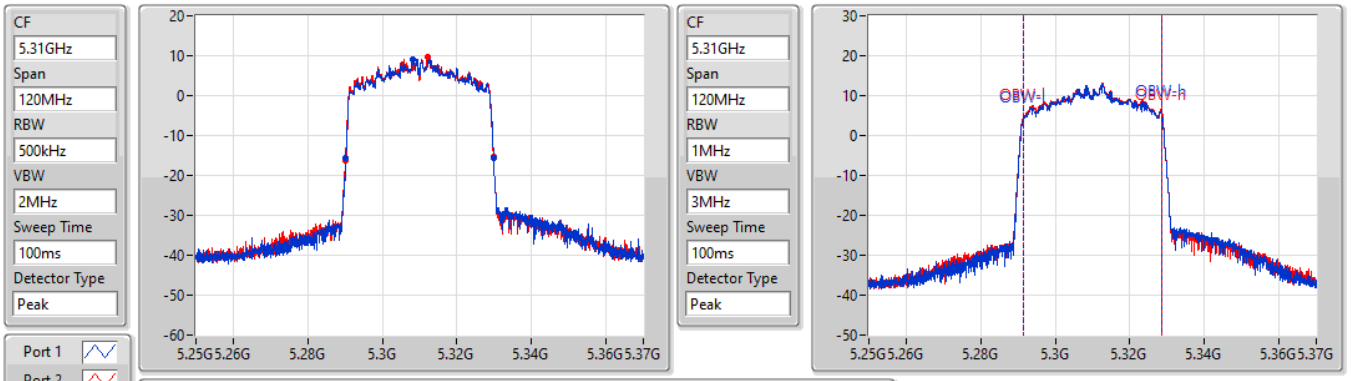


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.72M	5.29014G	5.32986G	37.301M	5.291349G	5.328651G	Inf	1
39.72M	5.29008G	5.3298G	37.361M	5.291289G	5.328651G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5510MHz

22/05/2022

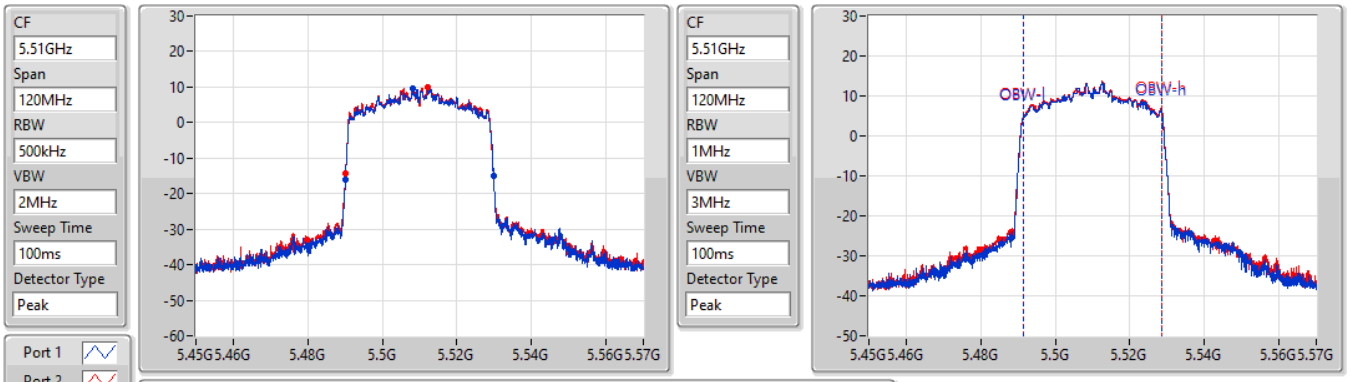


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.78M	5.49008G	5.52986G	37.361M	5.491289G	5.528651G	Inf	1
39.66M	5.49014G	5.5298G	37.361M	5.491289G	5.528651G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5550MHz


22/05/2022

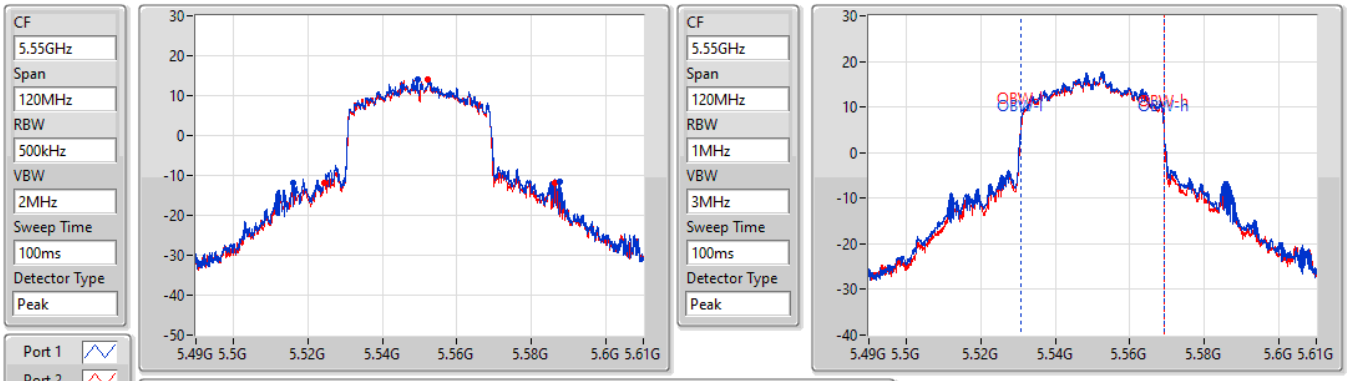

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
71.64M	5.51598G	5.58762G	38.381M	5.53081G	5.56919G	Inf	1
61.8M	5.52444G	5.58624G	38.201M	5.53087G	5.56907G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW


5670MHz

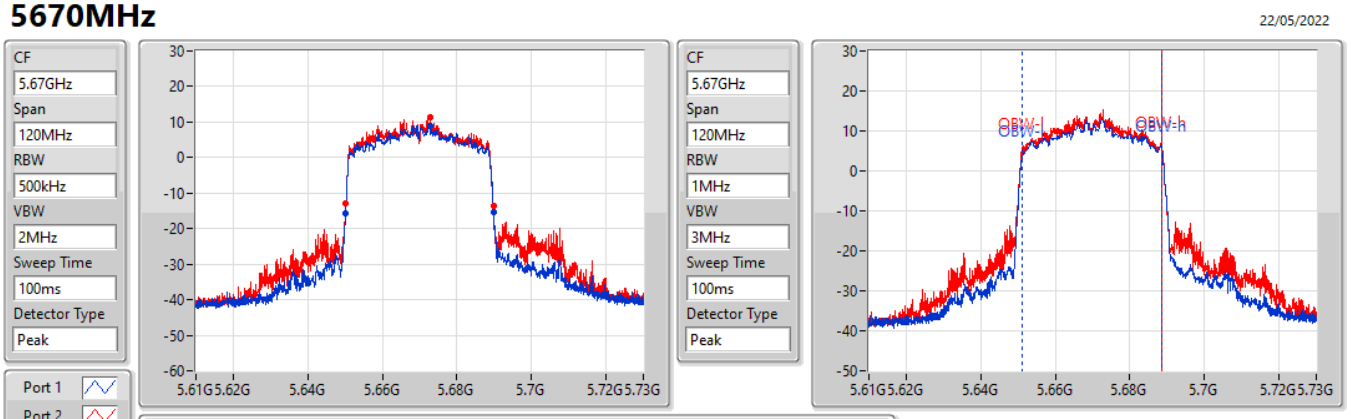

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.78M	5.65008G	5.68986G	37.421M	5.651229G	5.688651G	Inf	1
39.6M	5.65014G	5.68974G	37.421M	5.651169G	5.688591G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5710MHz Straddle 5.47-5.725GHz

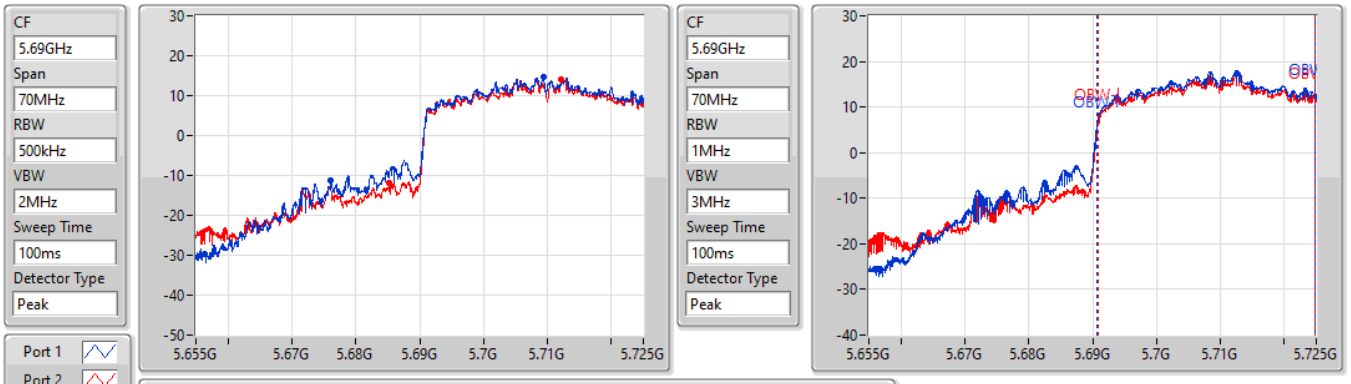


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
48.895M	5.676105G	5.725G	34.073M	5.690665G	5.724738G	Inf	1
39.725M	5.685275G	5.725G	33.828M	5.69091G	5.724738G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5710MHz Straddle 5.725-5.85GHz

02/06/2022

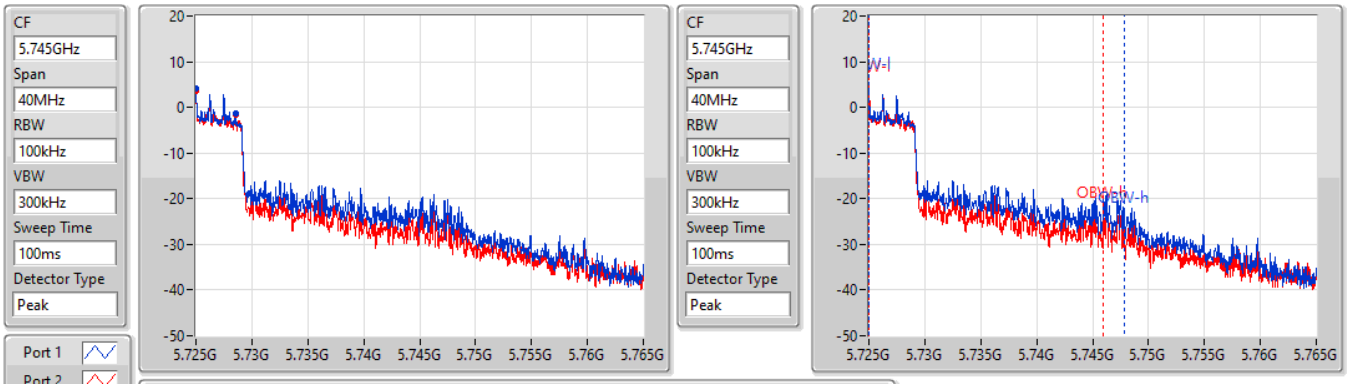


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.56M	5.725G	5.72856G	22.849M	5.72501G	5.747859G	500k	1
3.58M	5.725G	5.72858G	20.99M	5.72501G	5.746G	500k	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5710MHz Straddle 5.725-5.85GHz

02/06/2022

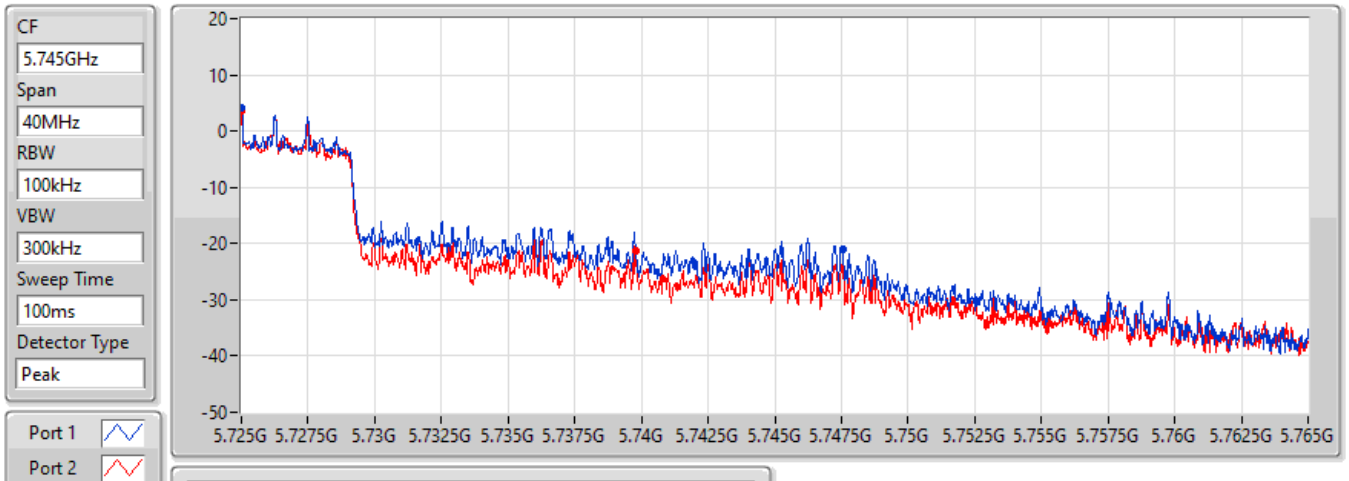


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
22.54M	5.725G	5.74754G	Inf	1
14.8M	5.725G	5.7398G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5755MHz

02/06/2022

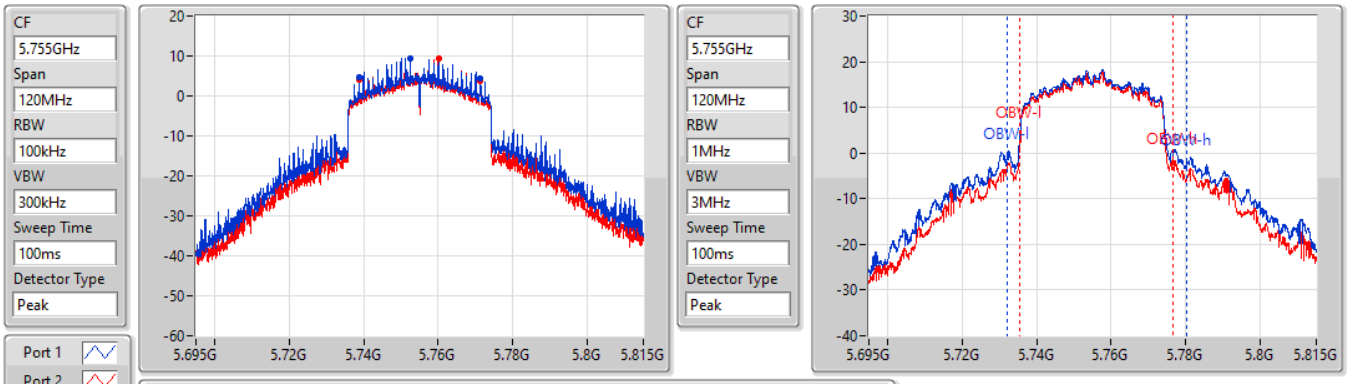


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
32.58M	5.73874G	5.77132G	48.396M	5.731972G	5.780367G	500k	1
32.52M	5.7388G	5.77132G	41.139M	5.73557G	5.776709G	500k	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5755MHz

02/06/2022

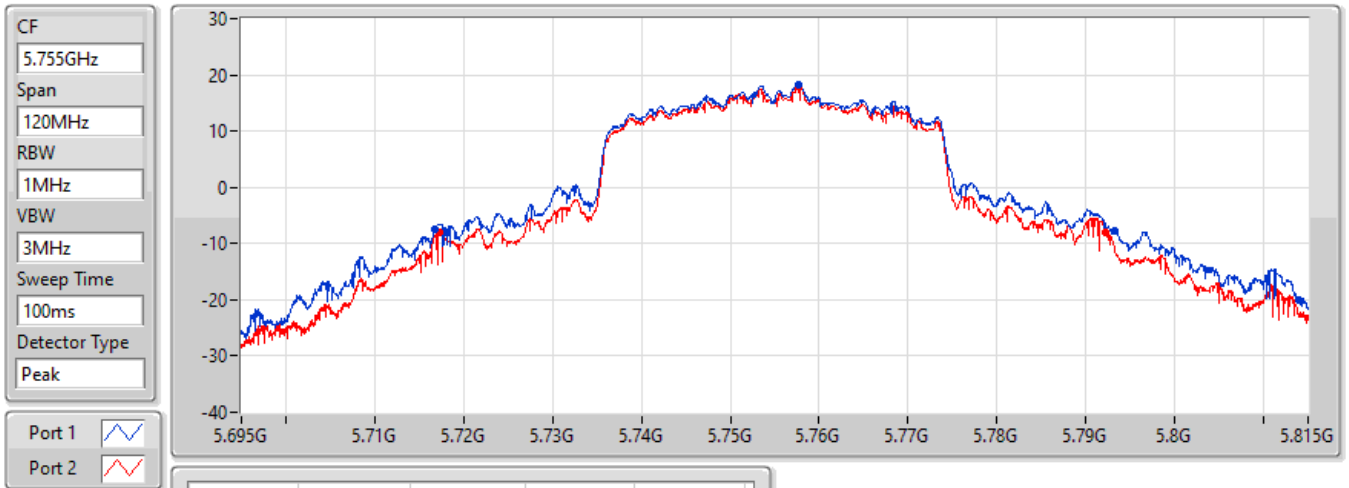


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
76.56M	5.71672G	5.79328G	Inf	1
75.06M	5.7172G	5.79226G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5795MHz

02/06/2022

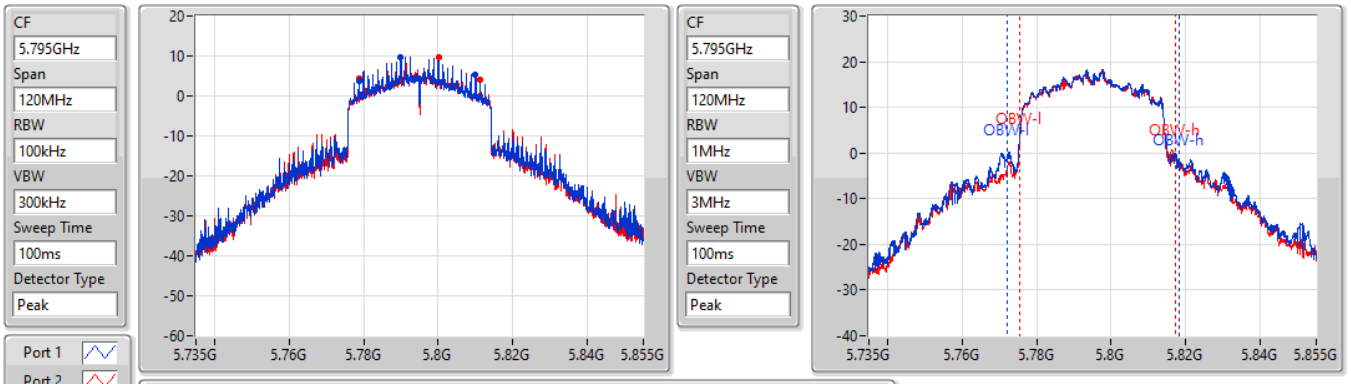


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.32M	5.77868G	5.81G	46.117M	5.772211G	5.818328G	500k	1
32.52M	5.77874G	5.81126G	41.679M	5.77539G	5.817069G	500k	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5795MHz

02/06/2022

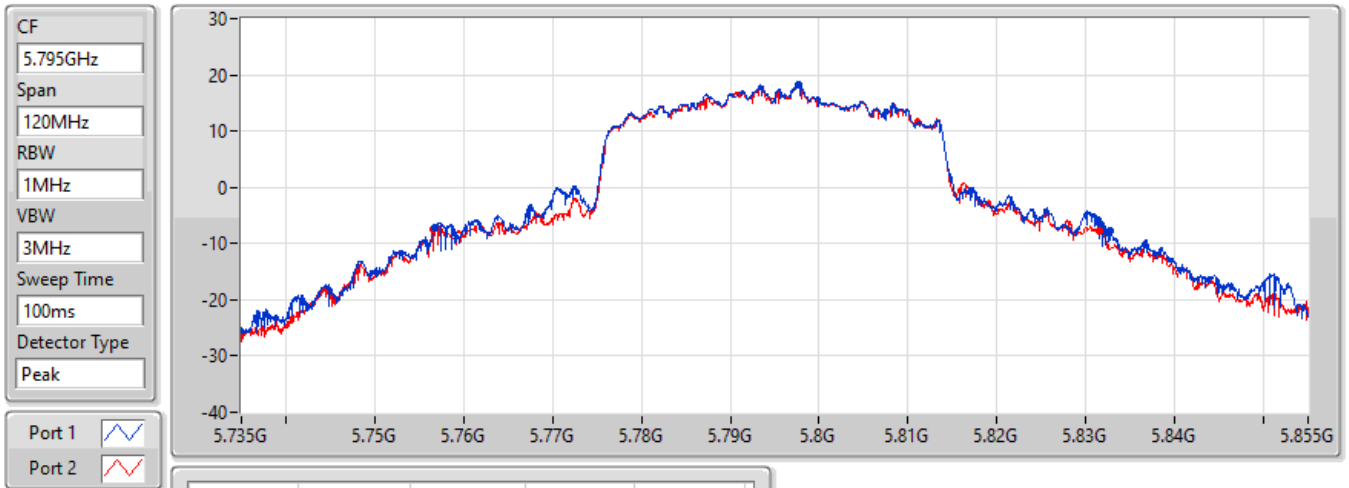


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
76.02M	5.75672G	5.83274G	Inf	1
74.94M	5.7566G	5.83154G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5210MHz

22/05/2022

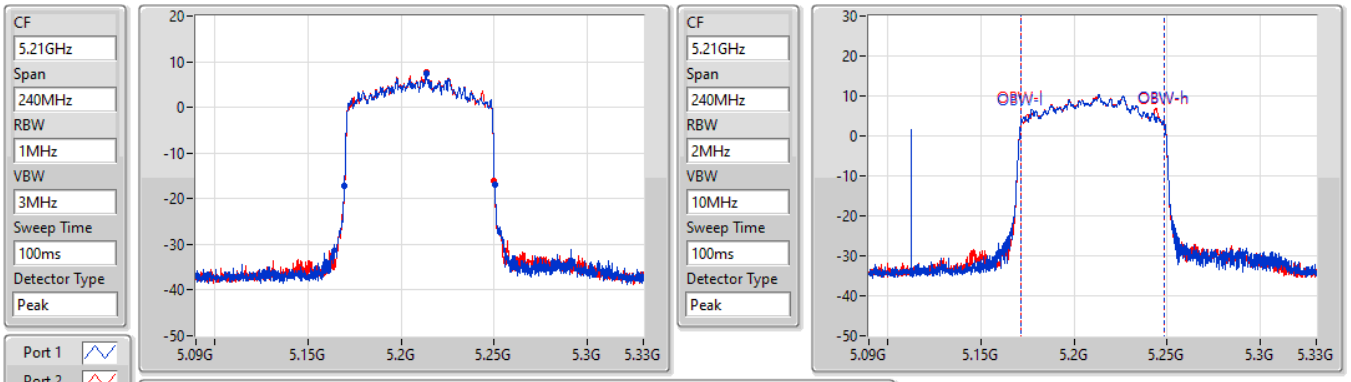


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.16968G	5.2502G	77.121M	5.171499G	5.248621G	Inf	1
80.28M	5.1698G	5.25008G	77.001M	5.171619G	5.248621G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5290MHz


22/05/2022

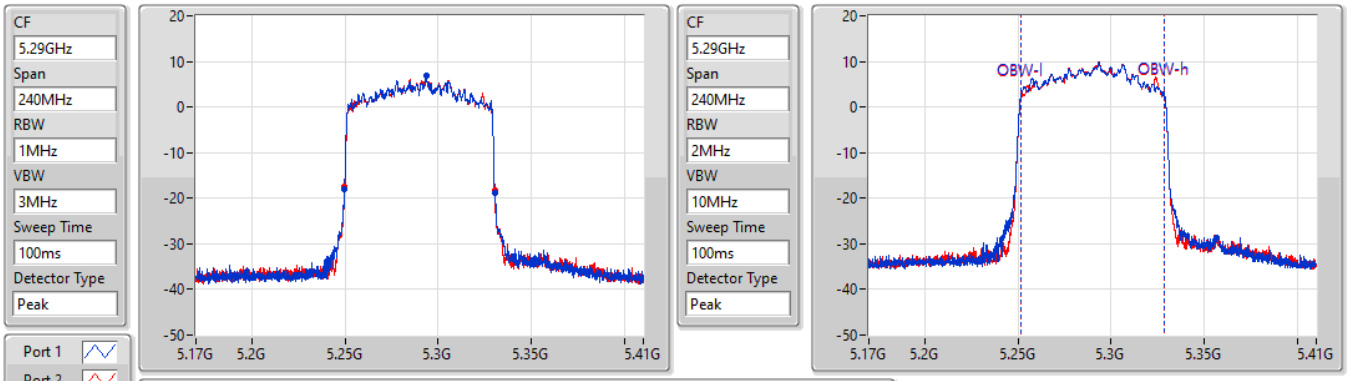

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.64M	5.24968G	5.33032G	77.001M	5.251619G	5.328621G	Inf	1
80.4M	5.2498G	5.3302G	77.001M	5.251619G	5.328621G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW


5530MHz

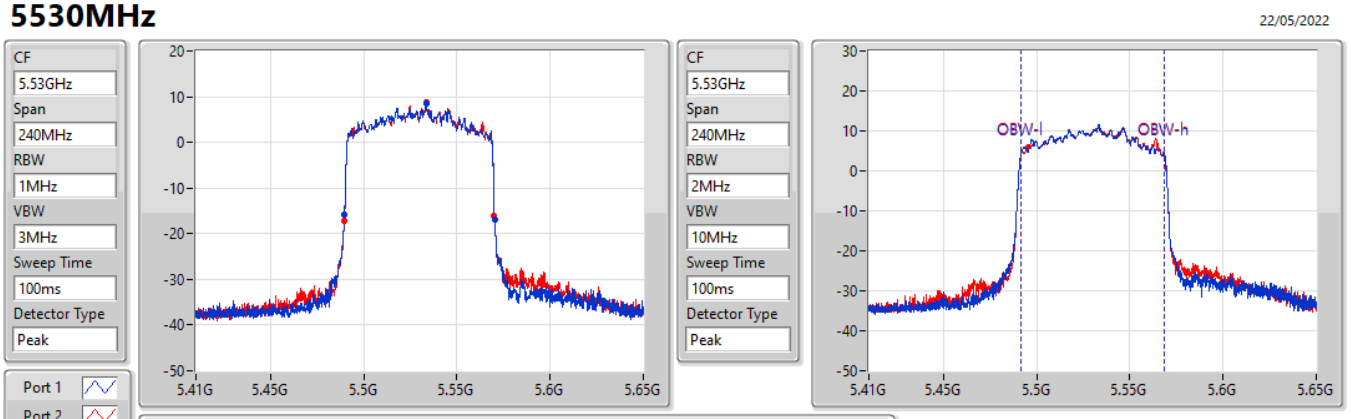

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.48968G	5.5702G	77.121M	5.491499G	5.568621G	Inf	1
80.4M	5.48968G	5.57008G	77.001M	5.491619G	5.568621G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5610MHz

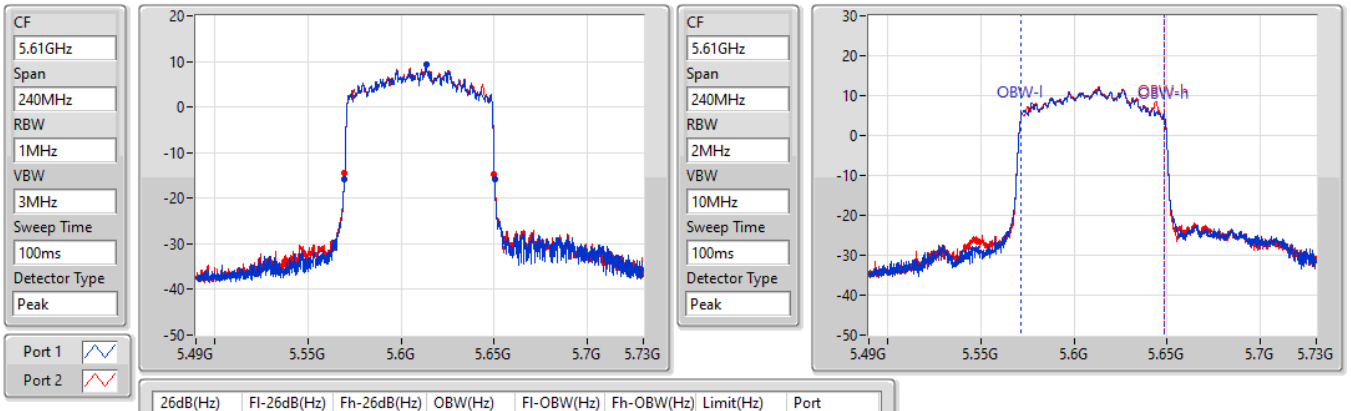


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.56968G	5.6502G	77.001M	5.571619G	5.648621G	Inf	1
80.28M	5.5698G	5.65008G	77.001M	5.571619G	5.648621G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX **EBW**

5690MHz Straddle 5.47-5.725GHz

22/05/2022

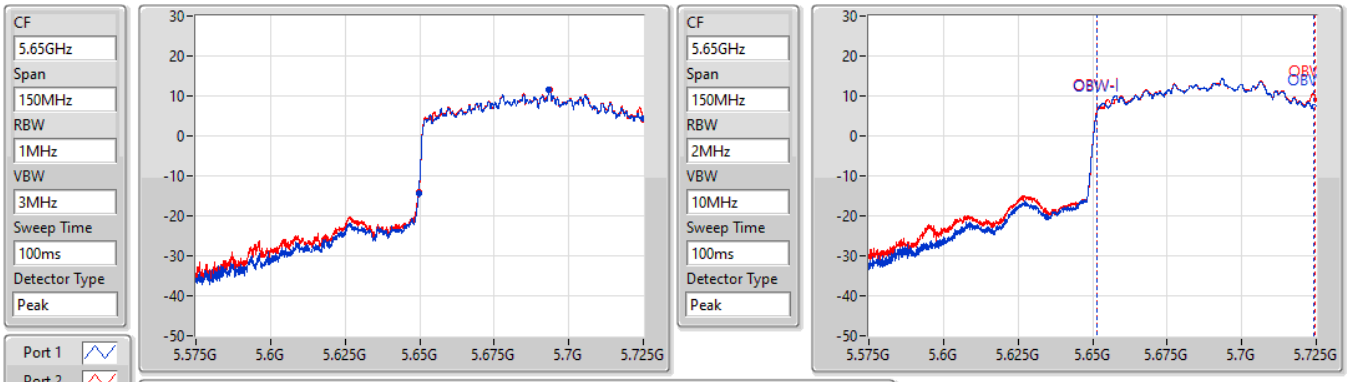


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
75.3M	5.6497G	5.725G	72.564M	5.651649G	5.724213G	Inf	1
75.225M	5.649775G	5.725G	72.939M	5.651574G	5.724513G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX **EBW**

5690MHz Straddle 5.725-5.85GHz

02/06/2022

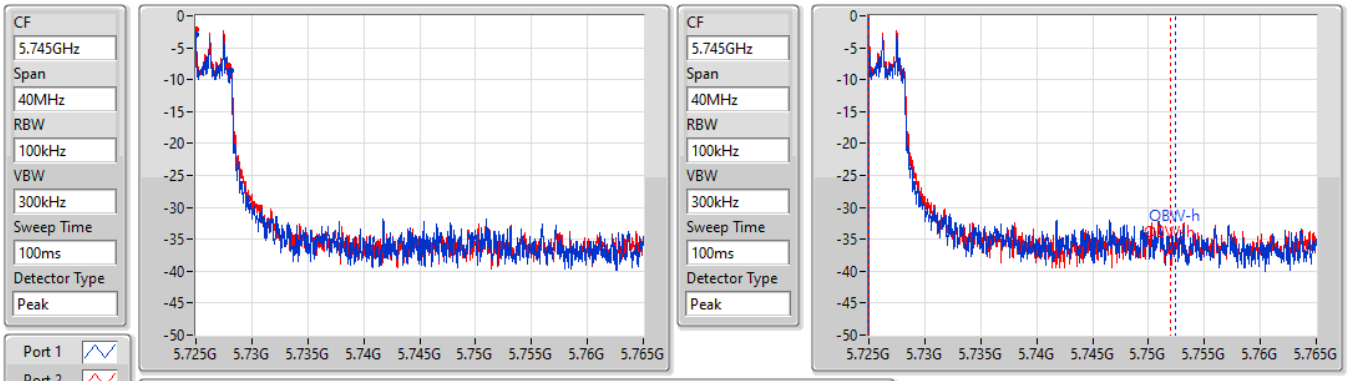


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.12M	5.725G	5.72812G	27.426M	5.72501G	5.752436G	500k	1
2.92M	5.725G	5.72792G	26.907M	5.72501G	5.751917G	500k	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5690MHz Straddle 5.725-5.85GHz

02/06/2022

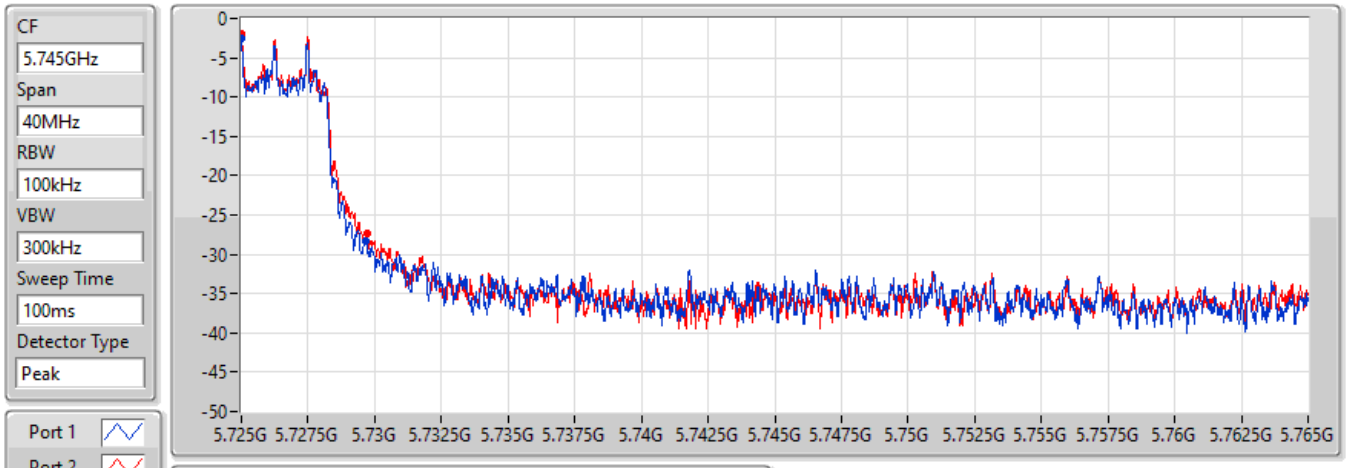


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
4.66M	5.725G	5.72966G	Inf	1
4.72M	5.725G	5.72972G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5775MHz

02/06/2022

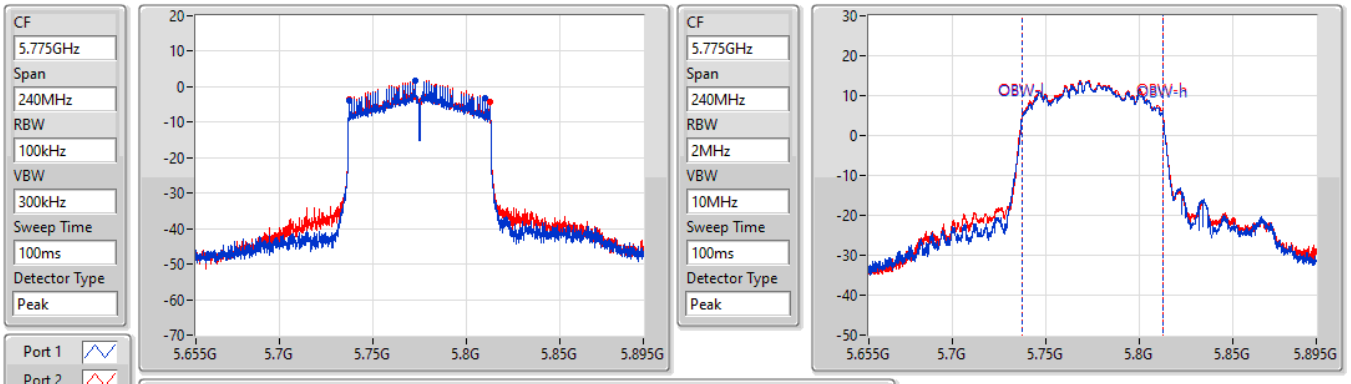

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
72.48M	5.73744G	5.80992G	75.202M	5.737459G	5.812661G	500k	1
75.12M	5.73744G	5.81256G	75.322M	5.737339G	5.812661G	500k	2


802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5775MHz

02/06/2022

CF	5.775GHz
Span	240MHz
RBW	2MHz
VBW	10MHz
Sweep Time	100ms
Detector Type	Peak

Port 1
Port 2

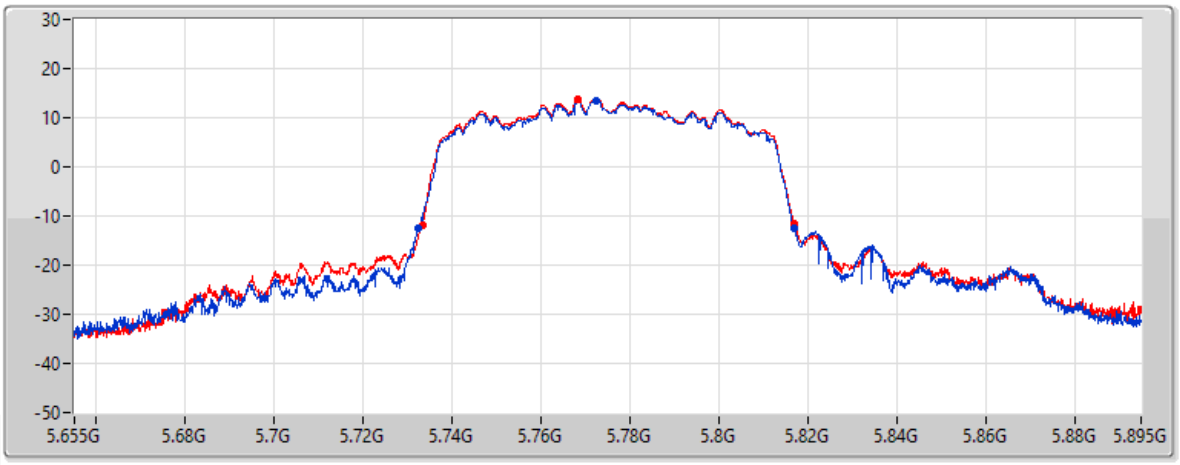

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
84.48M	5.7324G	5.81688G	Inf	1
83.76M	5.73324G	5.817G	Inf	2


802.11ax HEW160_Nss1,(MCS0)_2TX EBW

5250MHz Straddle 5.15-5.25GHz


22/05/2022

CF	5.17GHz
Span	160MHz
RBW	2MHz
VBW	10MHz
Sweep Time	100ms
Detector Type	Peak

Port 1
Port 2

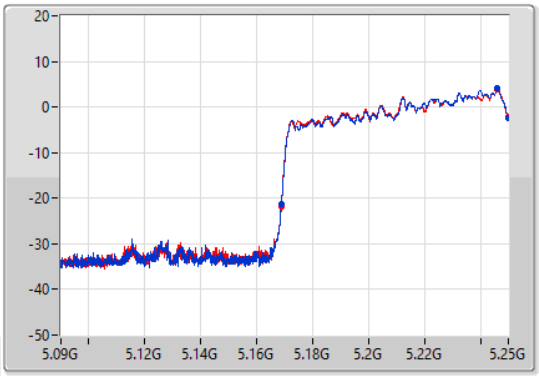

CF	5.17GHz
Span	160MHz
RBW	3MHz
VBW	10MHz
Sweep Time	100ms
Detector Type	Peak

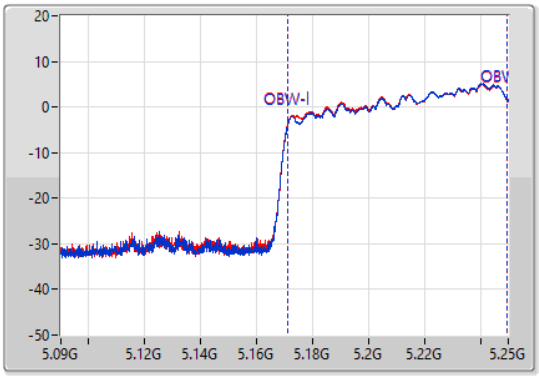


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
81.2M	5.1688G	5.25G	78.281M	5.171279G	5.24956G	Inf	1
81.2M	5.1688G	5.25G	78.361M	5.171199G	5.24956G	Inf	2

802.11ax HEW160_Nss1,(MCS0)_2TX **EBW**

5250MHz Straddle 5.25-5.35GHz

22/05/2022

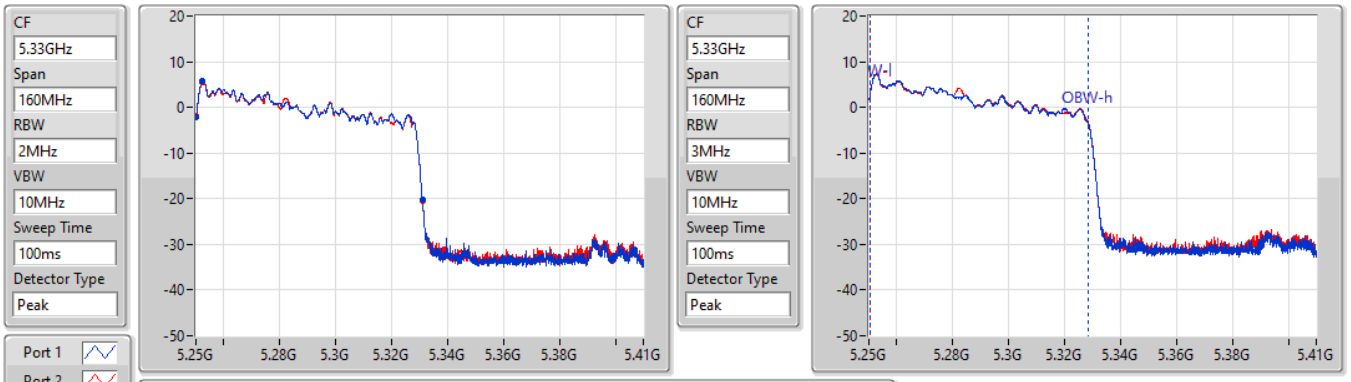


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.96M	5.25G	5.33096G	77.881M	5.25044G	5.328321G	Inf	1
80.96M	5.25G	5.33096G	77.881M	5.25044G	5.328321G	Inf	2

802.11ax HEW160_Nss1,(MCS0)_2TX **EBW**

5570MHz

22/05/2022

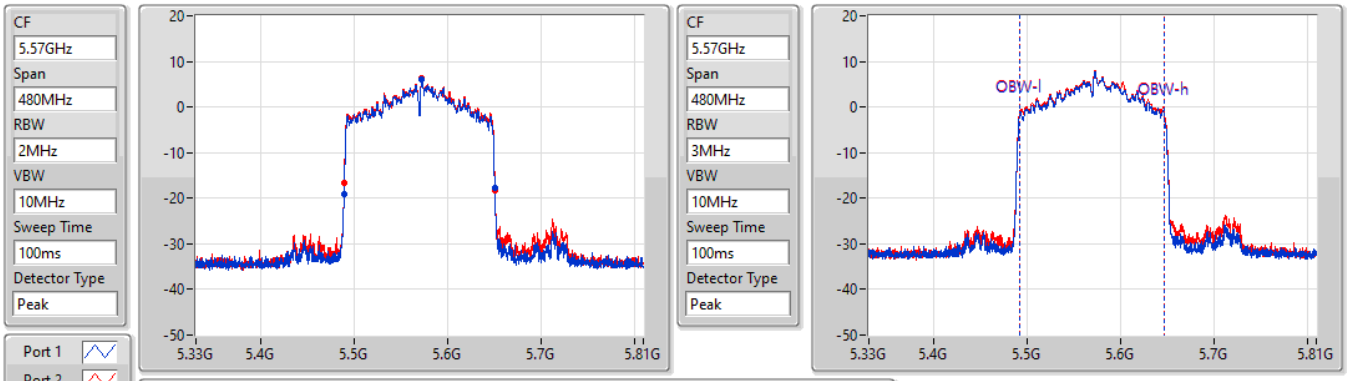

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
161.76M	5.48888G	5.65064G	154.483M	5.492279G	5.646762G	Inf	1
161.76M	5.48912G	5.65088G	154.723M	5.492279G	5.647001G	Inf	2

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	19.32M	16.252M	16M3D1D	18.12M	16.192M
802.11ax HEW20_Nss1,(MCS0)_2TX	22.68M	18.651M	18M7D1D	22.23M	18.621M
802.11ax HEW40_Nss1,(MCS0)_2TX	71.7M	39.1M	39M1D1D	39.72M	37.541M
802.11ax HEW80_Nss1,(MCS0)_2TX	80.52M	77.001M	77M0D1D	80.52M	77.001M
802.11ax HEW160_Nss1,(MCS0)_2TX	81.2M	78.361M	78M4D1D	81.12M	78.361M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	23.07M	16.222M	16M2D1D	18.18M	16.192M
802.11ax HEW20_Nss1,(MCS0)_2TX	22.65M	18.651M	18M7D1D	20.01M	18.591M
802.11ax HEW40_Nss1,(MCS0)_2TX	71.64M	38.861M	38M9D1D	39.6M	37.361M
802.11ax HEW80_Nss1,(MCS0)_2TX	80.64M	77.001M	77M0D1D	80.52M	77.001M
802.11ax HEW160_Nss1,(MCS0)_2TX	81.04M	77.961M	78M0D1D	80.96M	77.961M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	18.48M	16.192M	16M2D1D	13.935M	13.073M
802.11ax HEW20_Nss1,(MCS0)_2TX	22.47M	18.651M	18M7D1D	14.955M	14.273M
802.11ax HEW40_Nss1,(MCS0)_2TX	71.76M	39.4M	39M4D1D	39.66M	33.933M
802.11ax HEW80_Nss1,(MCS0)_2TX	102.3M	77.001M	77M0D1D	80.4M	73.763M
802.11ax HEW160_Nss1,(MCS0)_2TX	162M	155.202M	155MD1D	161.76M	154.963M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	15.06M	20.87M	20M9D1D	3.08M	3.418M
802.11ax HEW20_Nss1,(MCS0)_2TX	15.06M	19.25M	19M2D1D	3.8M	4.558M
802.11ax HEW40_Nss1,(MCS0)_2TX	32.52M	47.316M	47M3D1D	3.56M	21.169M
802.11ax HEW80_Nss1,(MCS0)_2TX	73.8M	77.961M	78M0D1D	2.62M	37.521M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	18.21M	16.192M	19.32M	16.222M
5200MHz	Pass	Inf	19.26M	16.252M	18.45M	16.192M
5240MHz	Pass	Inf	18.12M	16.192M	19.23M	16.192M
5260MHz	Pass	Inf	18.24M	16.222M	23.07M	16.222M
5300MHz	Pass	Inf	18.18M	16.192M	18.39M	16.192M
5320MHz	Pass	Inf	18.24M	16.192M	18.45M	16.192M
5500MHz	Pass	Inf	17.97M	16.162M	18.42M	16.192M
5580MHz	Pass	Inf	18.09M	16.192M	18.48M	16.192M
5700MHz	Pass	Inf	17.94M	16.162M	18.39M	16.162M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	13.935M	13.088M	13.995M	13.073M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.1M	3.418M	3.08M	3.578M
5745MHz	Pass	500k	15.06M	18.381M	15.03M	20.75M
5785MHz	Pass	500k	15M	19.16M	15.03M	20.87M
5825MHz	Pass	500k	15M	18.801M	12.66M	18.681M
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	22.59M	18.651M	22.38M	18.621M
5200MHz	Pass	Inf	22.68M	18.651M	22.23M	18.651M
5240MHz	Pass	Inf	22.56M	18.651M	22.44M	18.651M
5260MHz	Pass	Inf	20.07M	18.591M	20.04M	18.621M
5300MHz	Pass	Inf	22.65M	18.651M	22.41M	18.651M
5320MHz	Pass	Inf	22.53M	18.621M	20.01M	18.651M
5500MHz	Pass	Inf	20.04M	18.621M	20.07M	18.651M
5580MHz	Pass	Inf	20.04M	18.651M	22.47M	18.651M
5700MHz	Pass	Inf	20.01M	18.591M	20.04M	18.621M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	14.955M	14.288M	14.955M	14.273M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.8M	4.558M	3.82M	4.558M
5745MHz	Pass	500k	15.03M	19.13M	15.03M	19.25M
5785MHz	Pass	500k	15.03M	19.19M	15.06M	19.13M
5825MHz	Pass	500k	15M	19.04M	15.06M	19.07M
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	39.84M	37.541M	39.72M	37.541M
5230MHz	Pass	Inf	71.7M	39.04M	67.86M	39.1M
5270MHz	Pass	Inf	71.64M	38.861M	64.02M	38.381M
5310MHz	Pass	Inf	39.72M	37.481M	39.6M	37.361M
5510MHz	Pass	Inf	39.84M	37.481M	39.66M	37.481M
5550MHz	Pass	Inf	71.76M	39.4M	49.38M	38.021M
5670MHz	Pass	Inf	39.9M	37.481M	39.78M	37.481M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	48.965M	34.073M	40.18M	33.933M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.56M	23.388M	3.58M	21.169M
5755MHz	Pass	500k	31.26M	47.316M	31.26M	44.018M
5795MHz	Pass	500k	31.2M	45.097M	32.52M	41.499M
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	80.52M	77.001M	80.52M	77.001M
5290MHz	Pass	Inf	80.64M	77.001M	80.52M	77.001M
5530MHz	Pass	Inf	80.52M	76.882M	80.52M	77.001M
5610MHz	Pass	Inf	80.52M	77.001M	80.4M	77.001M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	102.3M	73.763M	97.425M	73.838M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	2.62M	37.521M	2.62M	37.581M
5775MHz	Pass	500k	71.28M	77.481M	73.8M	77.961M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	81.2M	78.361M	81.12M	78.361M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	81.04M	77.961M	80.96M	77.961M
5570MHz	Pass	Inf	162M	154.963M	161.76M	155.202M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11a_Nss1,(6Mbps)_2TX EBW


5180MHz

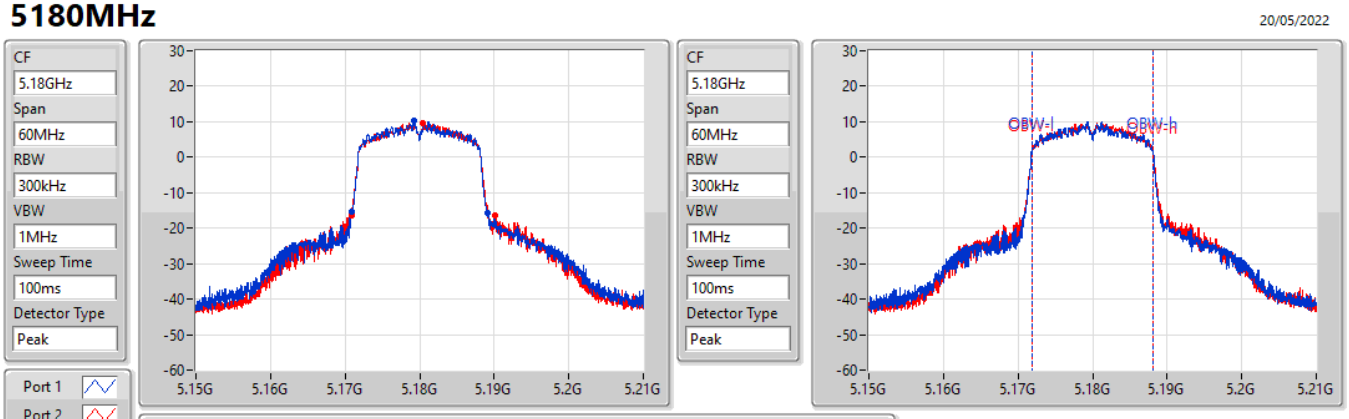

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.21M	5.17082G	5.18903G	16.192M	5.171874G	5.188066G	Inf	1
19.32M	5.17085G	5.19017G	16.222M	5.171874G	5.188096G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5200MHz

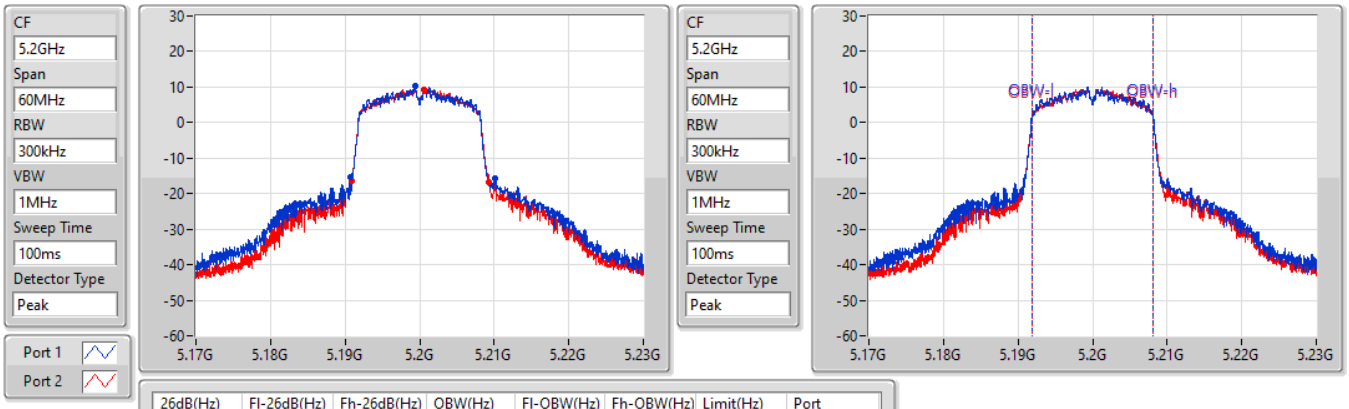

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.26M	5.19079G	5.21005G	16.252M	5.191874G	5.208126G	Inf	1
18.45M	5.19088G	5.20933G	16.192M	5.191904G	5.208096G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5240MHz

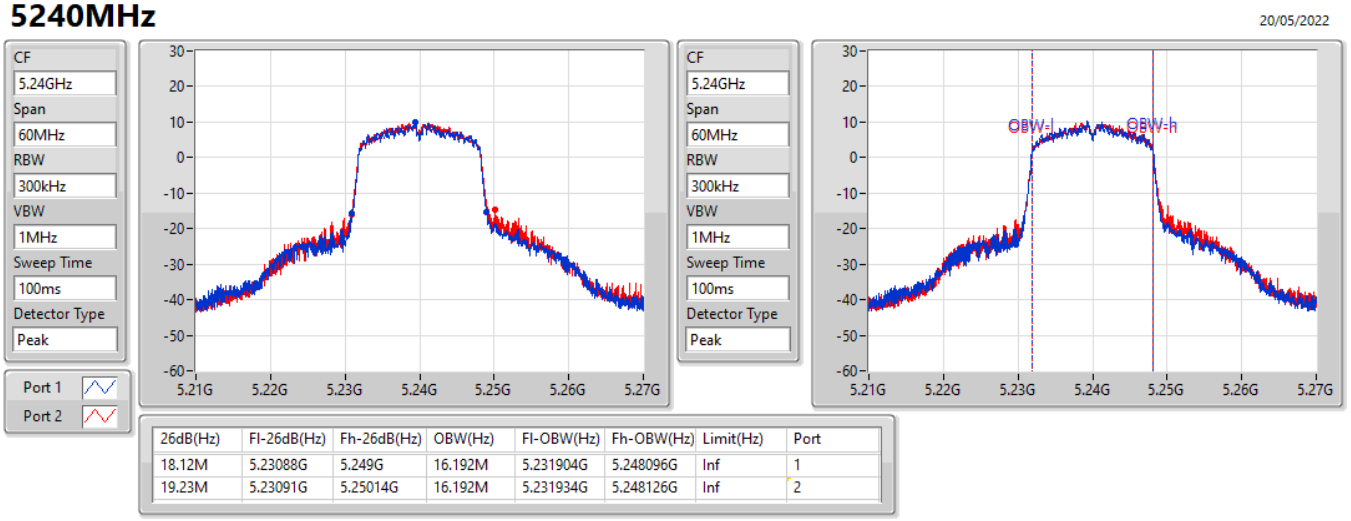

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.12M	5.23088G	5.249G	16.192M	5.231904G	5.248096G	Inf	1
19.23M	5.23091G	5.25014G	16.192M	5.231934G	5.248126G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5260MHz

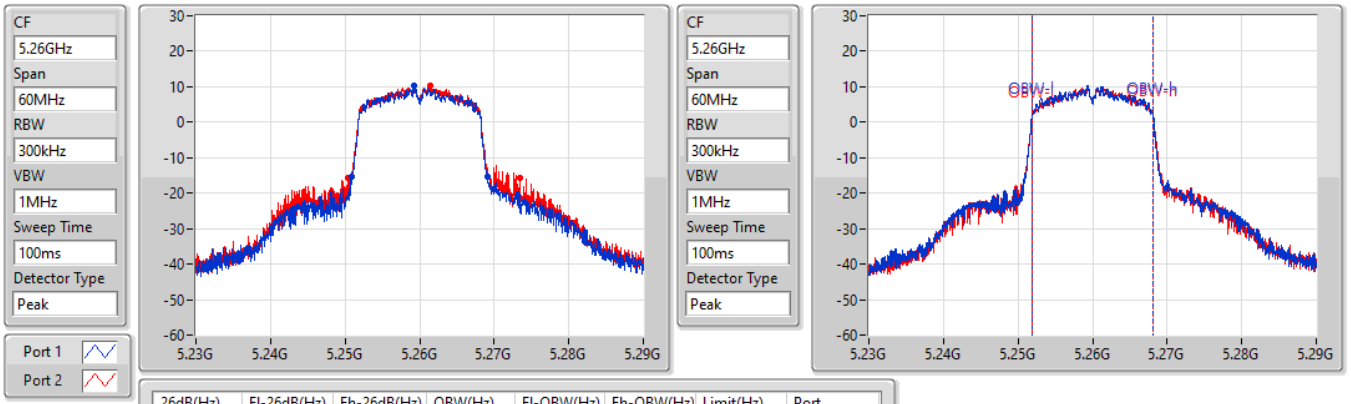

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.24M	5.25082G	5.26906G	16.222M	5.251904G	5.268126G	Inf	1
23.07M	5.25037G	5.27344G	16.222M	5.251904G	5.268126G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5300MHz

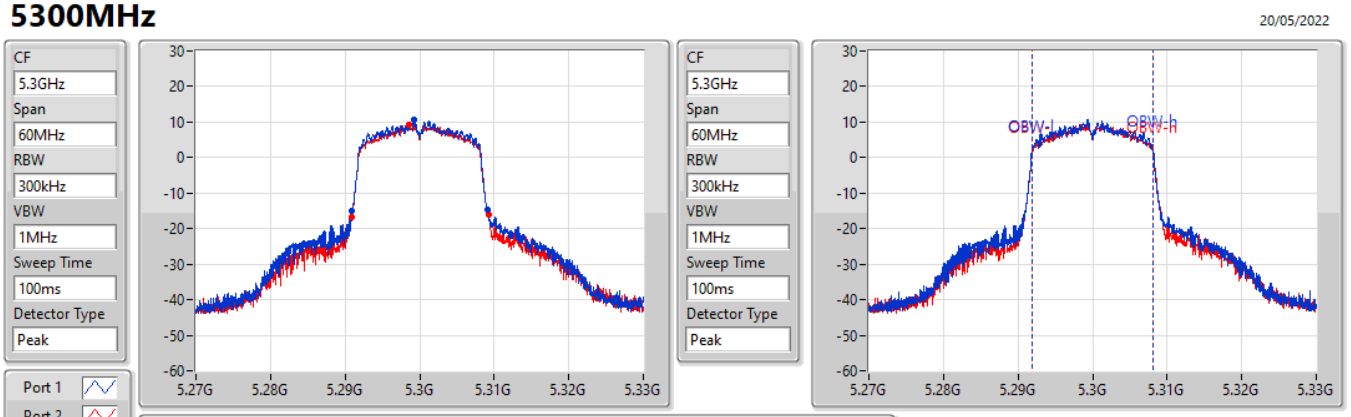

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.18M	5.29085G	5.30903G	16.192M	5.291904G	5.308096G	Inf	1
18.39M	5.29088G	5.30927G	16.192M	5.291904G	5.308096G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5320MHz

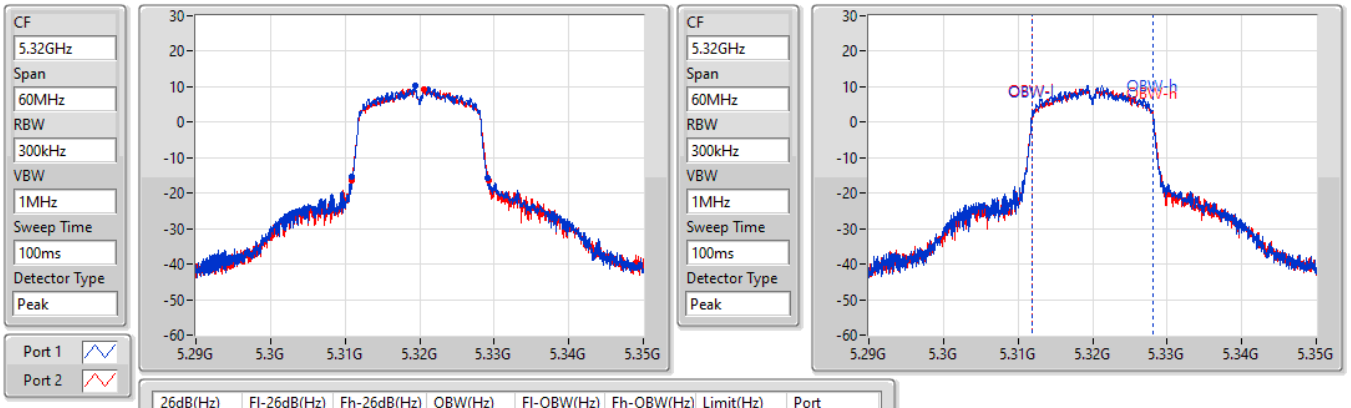

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.24M	5.31085G	5.32909G	16.192M	5.311904G	5.328096G	Inf	1
18.45M	5.31088G	5.32933G	16.192M	5.311934G	5.328126G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5500MHz

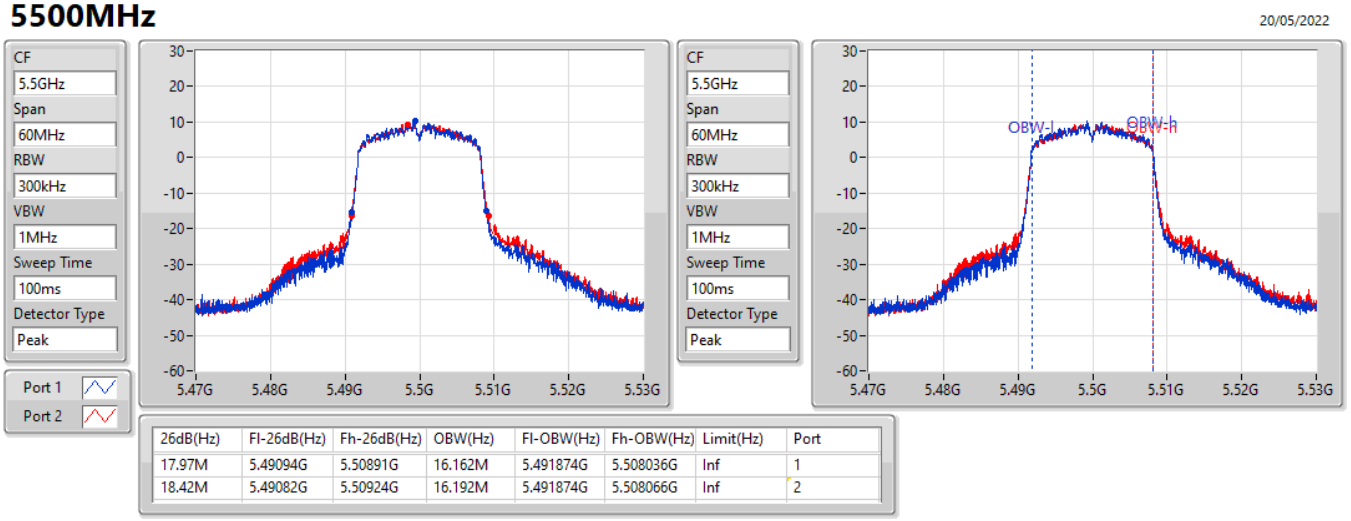

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
17.97M	5.49094G	5.50891G	16.162M	5.491874G	5.508036G	Inf	1
18.42M	5.49082G	5.50924G	16.192M	5.491874G	5.508066G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5580MHz

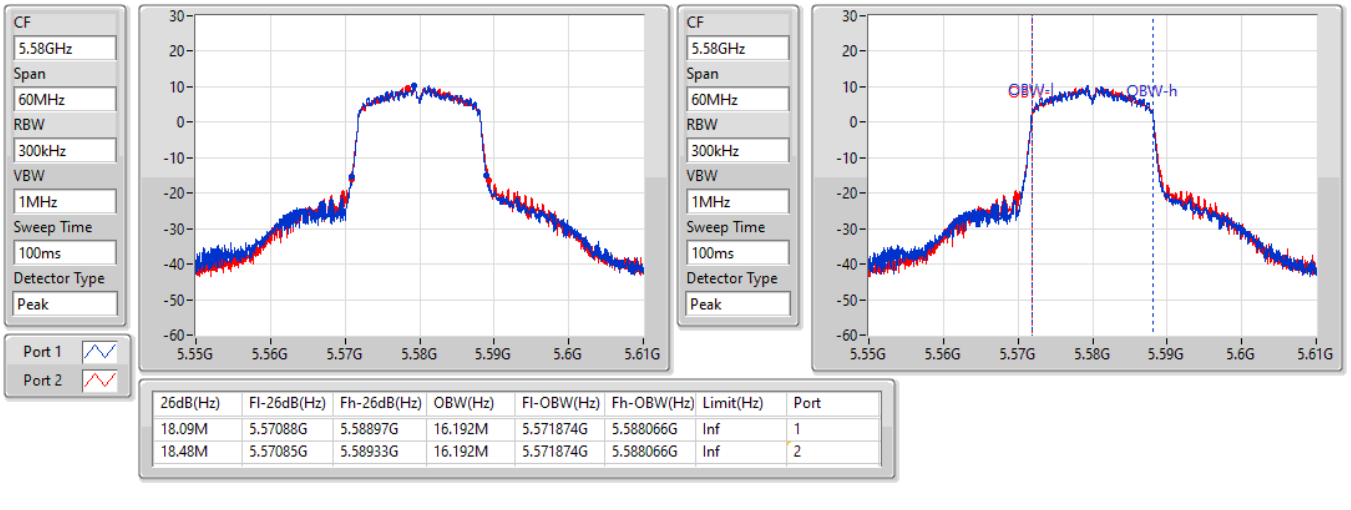

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.09M	5.57088G	5.58897G	16.192M	5.571874G	5.588066G	Inf	1
18.48M	5.57085G	5.58933G	16.192M	5.571874G	5.588066G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5700MHz

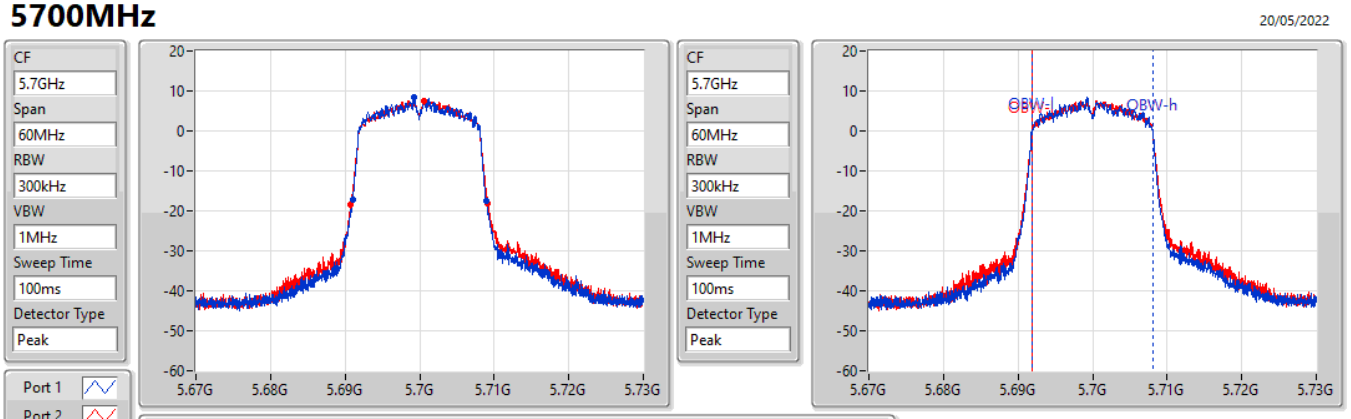

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
17.94M	5.691G	5.70894G	16.162M	5.691874G	5.708036G	Inf	1
18.39M	5.69079G	5.70918G	16.162M	5.691874G	5.708036G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW

5720MHz Straddle 5.47-5.725GHz

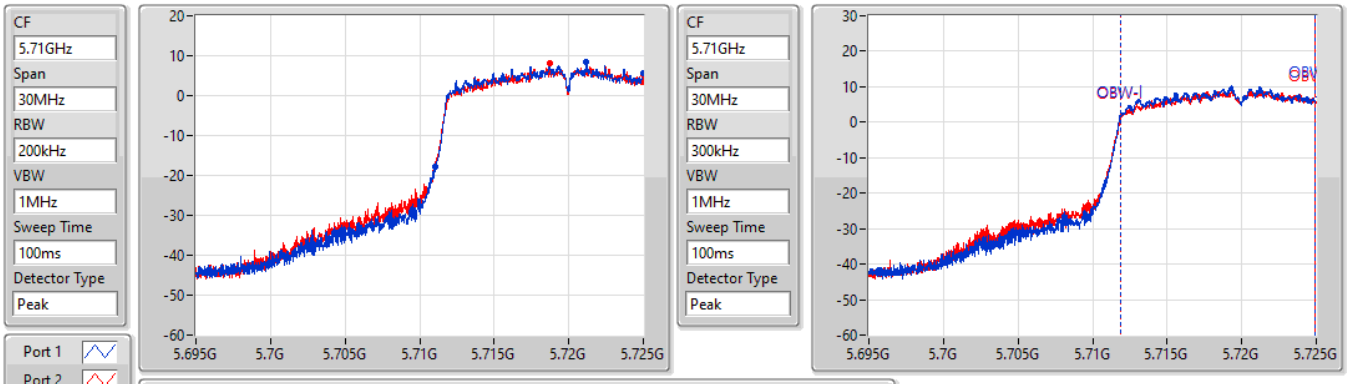


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
13.935M	5.711065G	5.725G	13.088M	5.711844G	5.724933G	Inf	1
13.995M	5.711005G	5.725G	13.073M	5.711844G	5.724918G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

03/06/2022

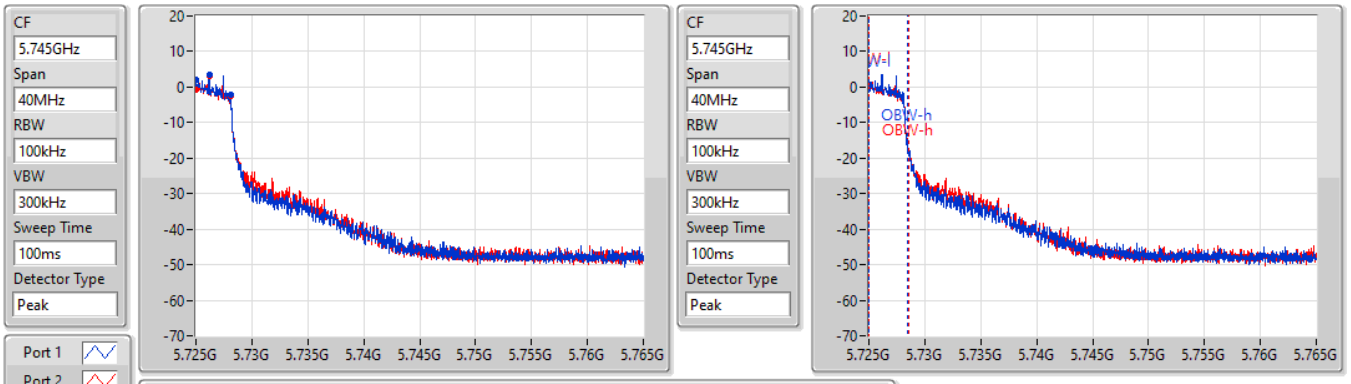


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.1M	5.725G	5.7281G	3.418M	5.72501G	5.728428G	500k	1
3.08M	5.725G	5.72808G	3.578M	5.72501G	5.728588G	500k	2

802.11a_Nss1,(6Mbps)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

03/06/2022

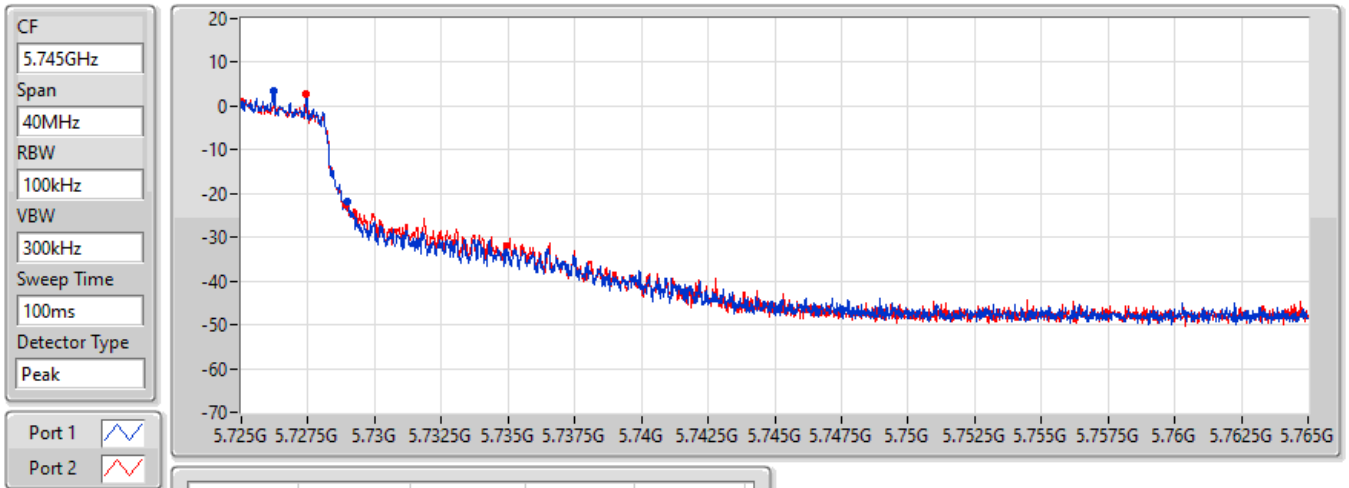


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
3.96M	5.725G	5.72896G	Inf	1
3.94M	5.725G	5.72894G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW

5745MHz

03/06/2022

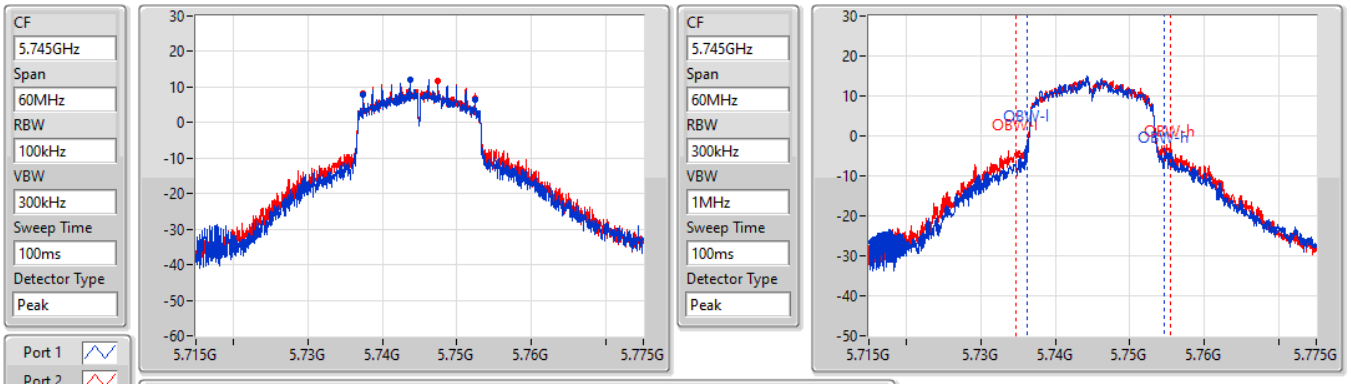


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.06M	5.73744G	5.7525G	18.381M	5.736304G	5.754685G	500k	1
15.03M	5.73747G	5.7525G	20.75M	5.734775G	5.755525G	500k	2

802.11a_Nss1,(6Mbps)_2TX EBW

5745MHz


03/06/2022

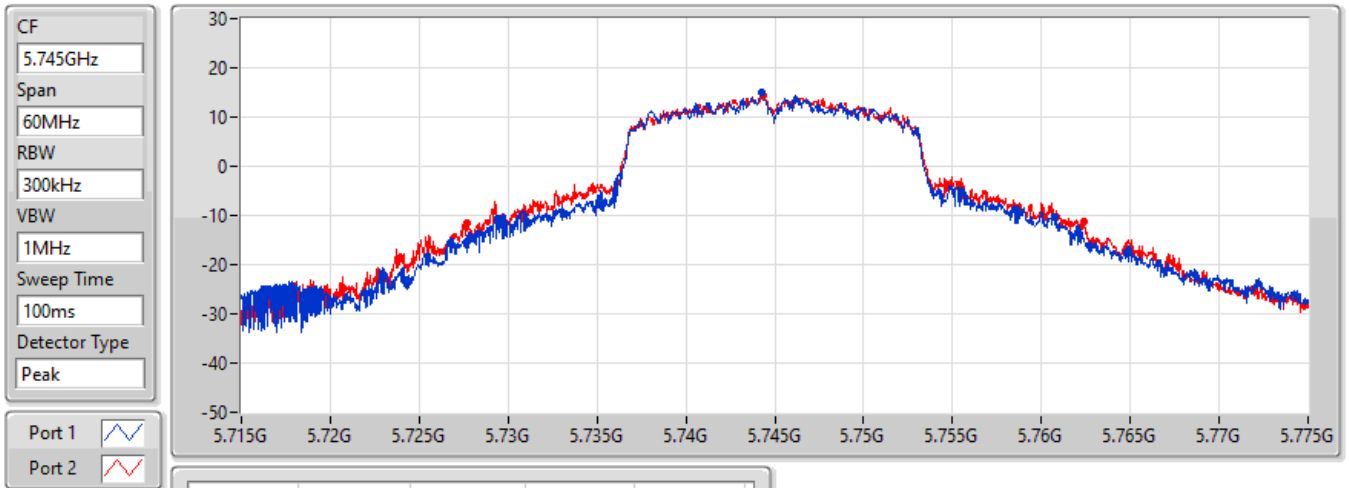

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
31.32M	5.7294G	5.76072G	Inf	1
34.68M	5.72769G	5.76237G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5785MHz

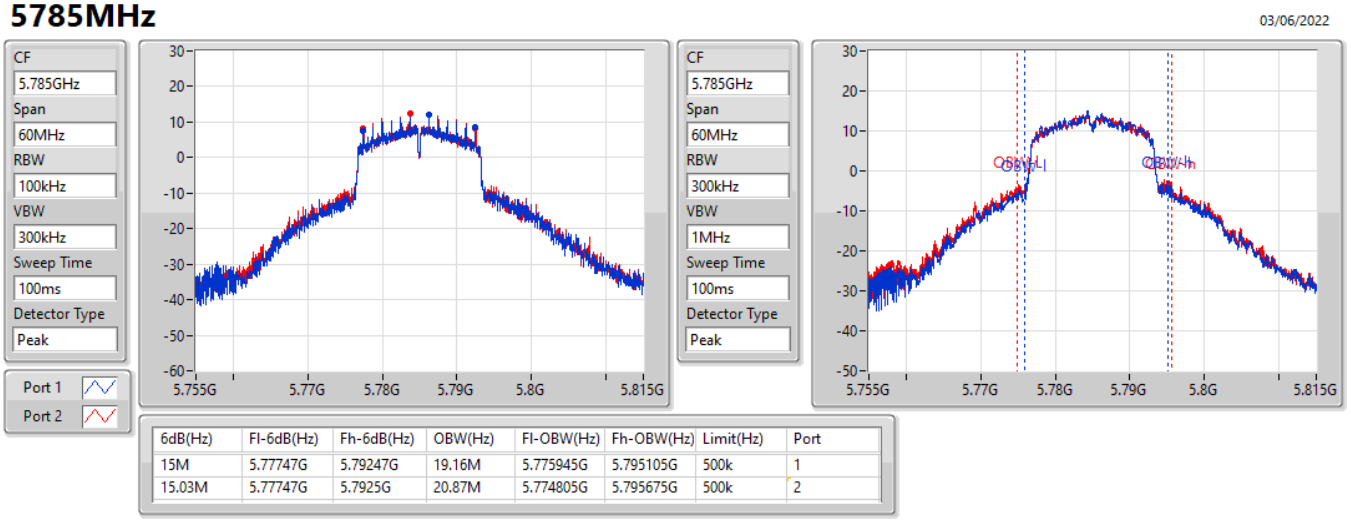

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15M	5.77747G	5.79247G	19.16M	5.775945G	5.795105G	500k	1
15.03M	5.77747G	5.7925G	20.87M	5.774805G	5.795675G	500k	2

802.11a_Nss1,(6Mbps)_2TX EBW


5785MHz

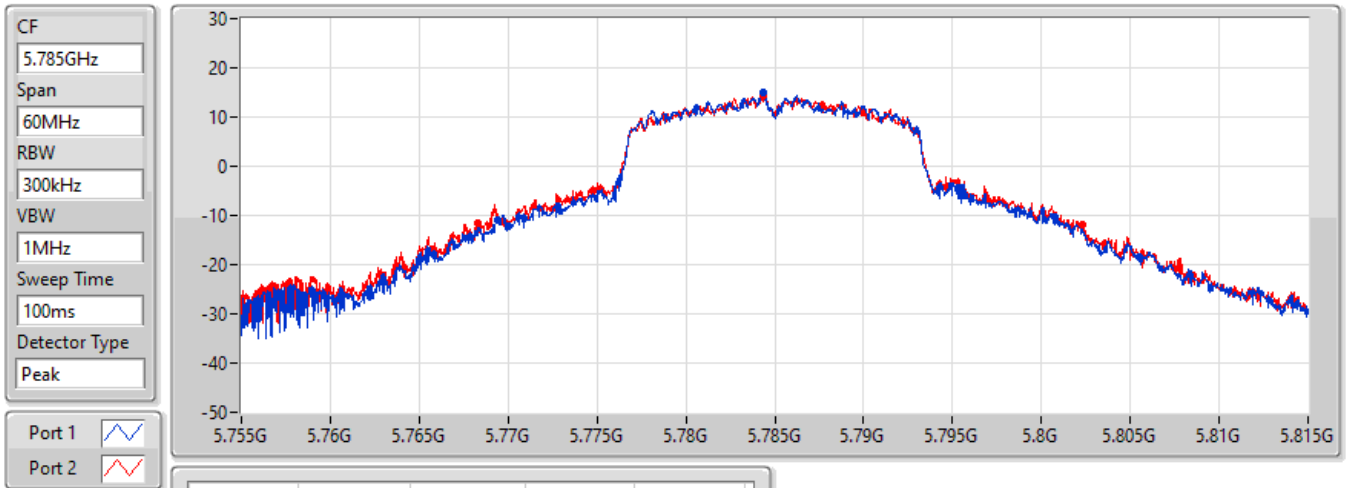

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
31.32M	5.76943G	5.80075G	Inf	1
34.02M	5.76832G	5.80234G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5825MHz

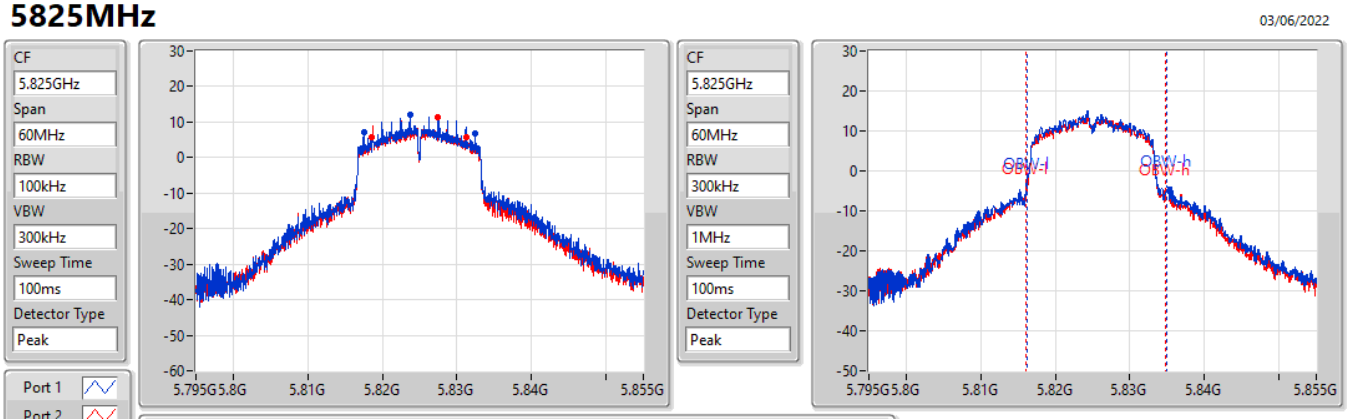

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15M	5.8175G	5.8325G	18.801M	5.816184G	5.834985G	500k	1
12.66M	5.81864G	5.8313G	18.681M	5.816094G	5.834775G	500k	2

802.11a_Nss1,(6Mbps)_2TX EBW


5825MHz

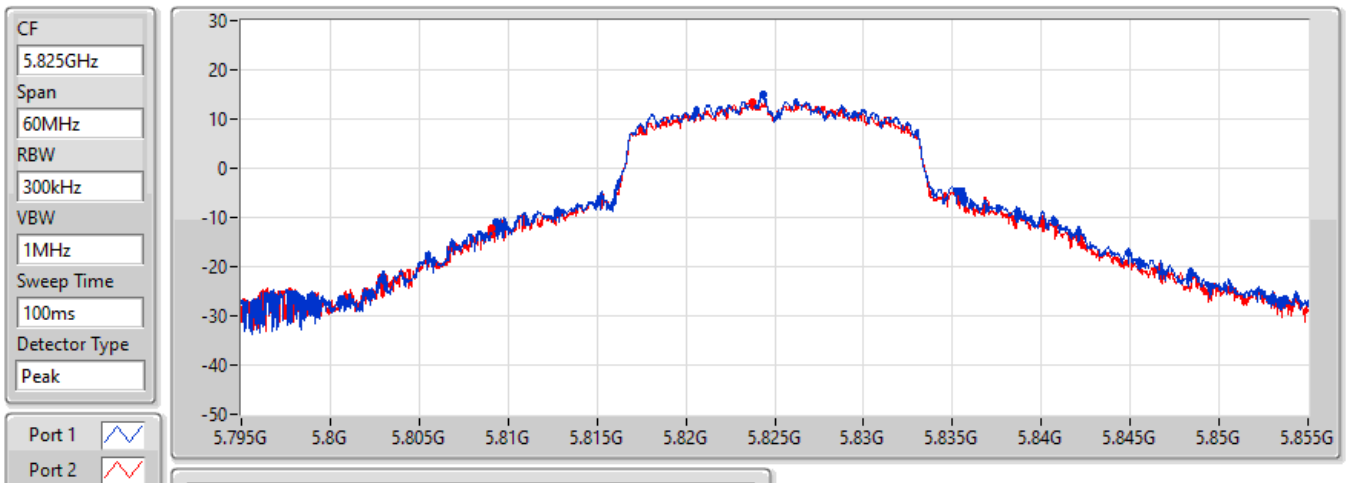

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
31.41M	5.80937G	5.84078G	Inf	1
31.68M	5.8091G	5.84078G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5180MHz

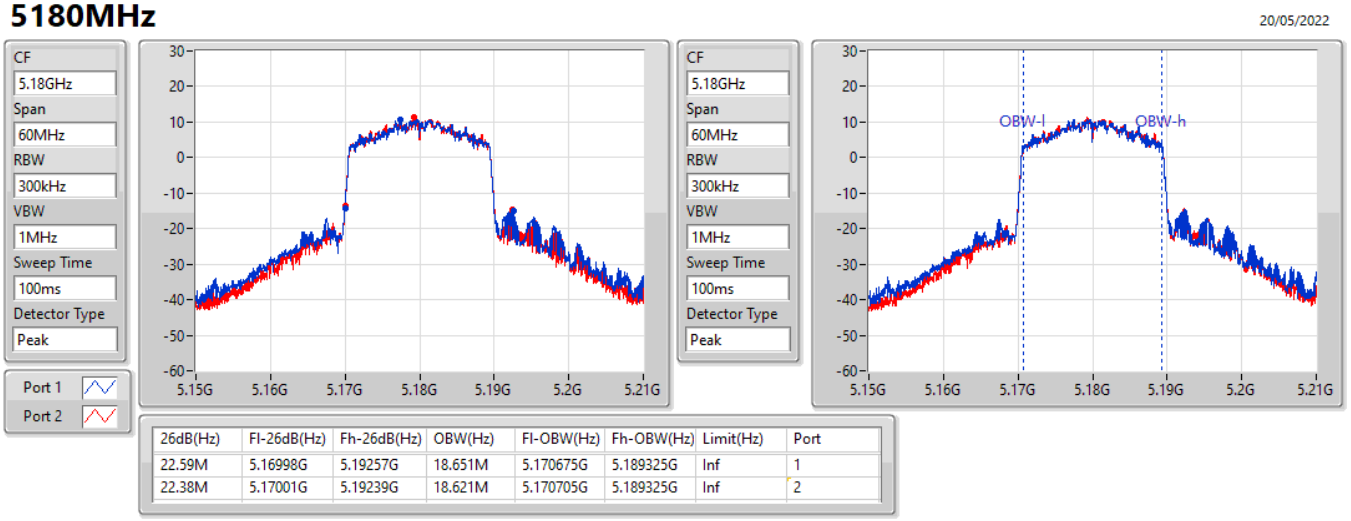

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.59M	5.16998G	5.19257G	18.651M	5.170675G	5.189325G	Inf	1
22.38M	5.17001G	5.19239G	18.621M	5.170705G	5.189325G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5200MHz

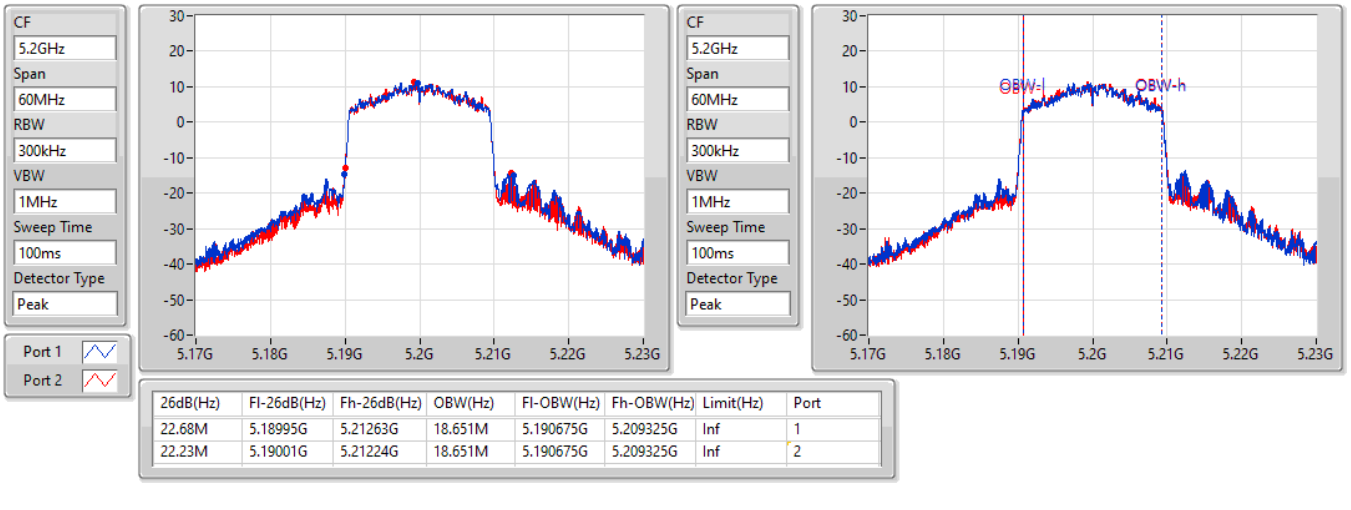

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.68M	5.18995G	5.21263G	18.651M	5.190675G	5.209325G	Inf	1
22.23M	5.19001G	5.21224G	18.651M	5.190675G	5.209325G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5240MHz

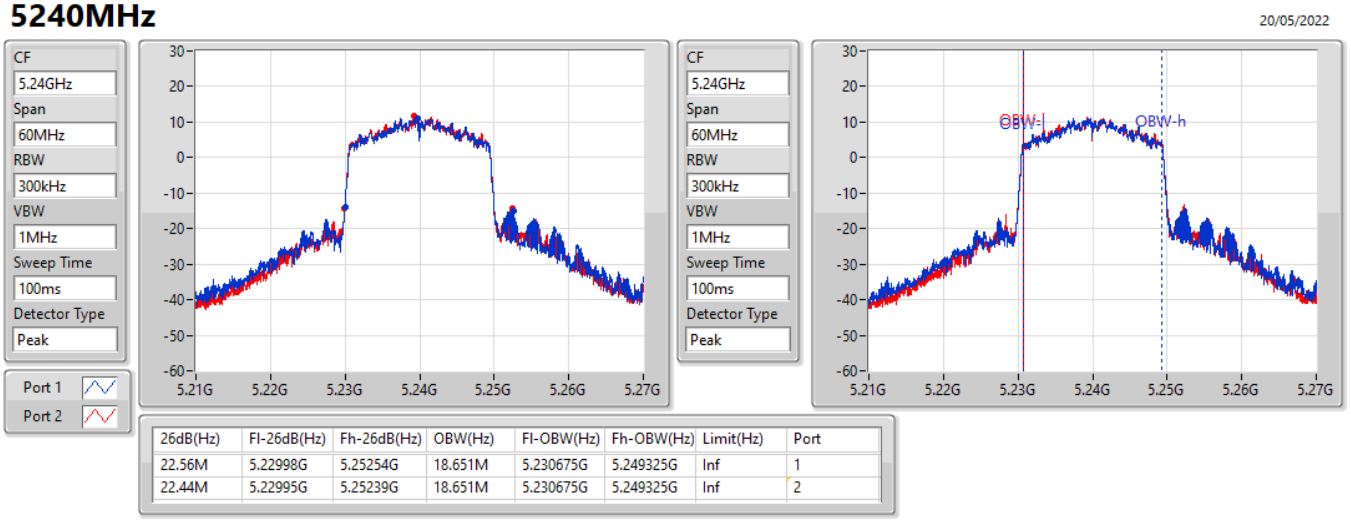

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.56M	5.22998G	5.25254G	18.651M	5.230675G	5.249325G	Inf	1
22.44M	5.22995G	5.25239G	18.651M	5.230675G	5.249325G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5260MHz

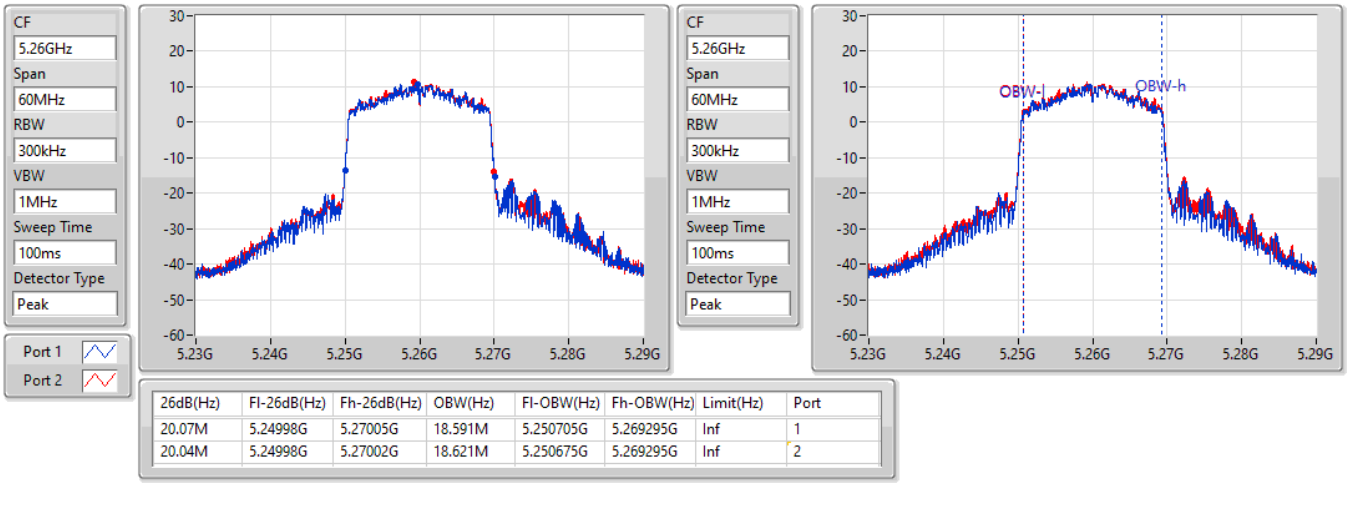

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.07M	5.24998G	5.27005G	18.591M	5.250705G	5.269295G	Inf	1
20.04M	5.24998G	5.27002G	18.621M	5.250675G	5.269295G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5300MHz

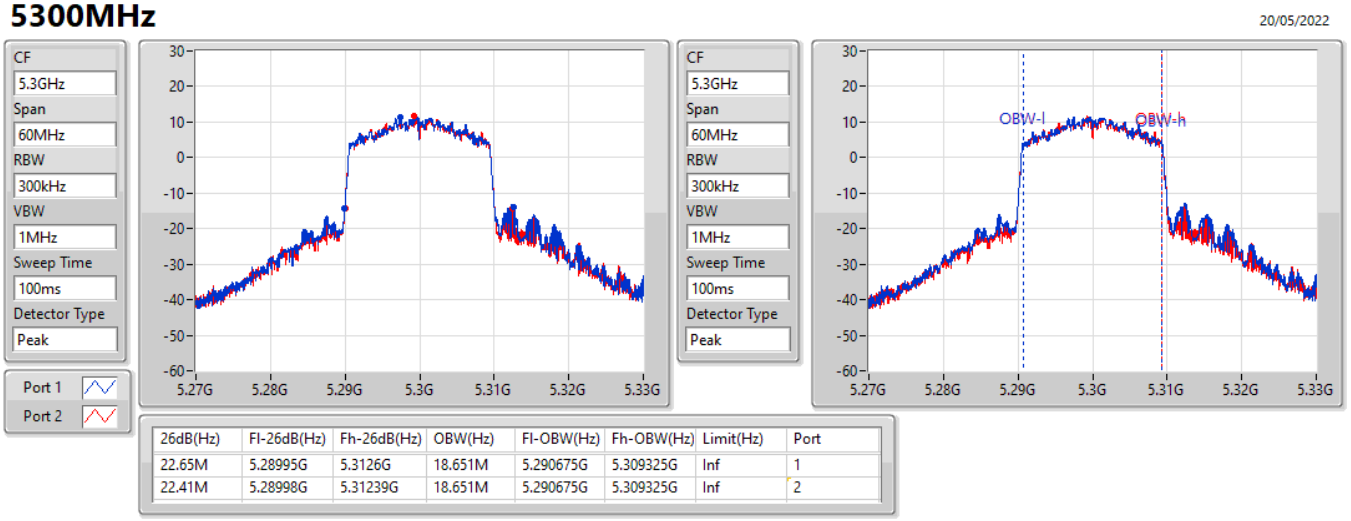

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.65M	5.28995G	5.3126G	18.651M	5.290675G	5.309325G	Inf	1
22.41M	5.28998G	5.31239G	18.651M	5.290675G	5.309325G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5320MHz

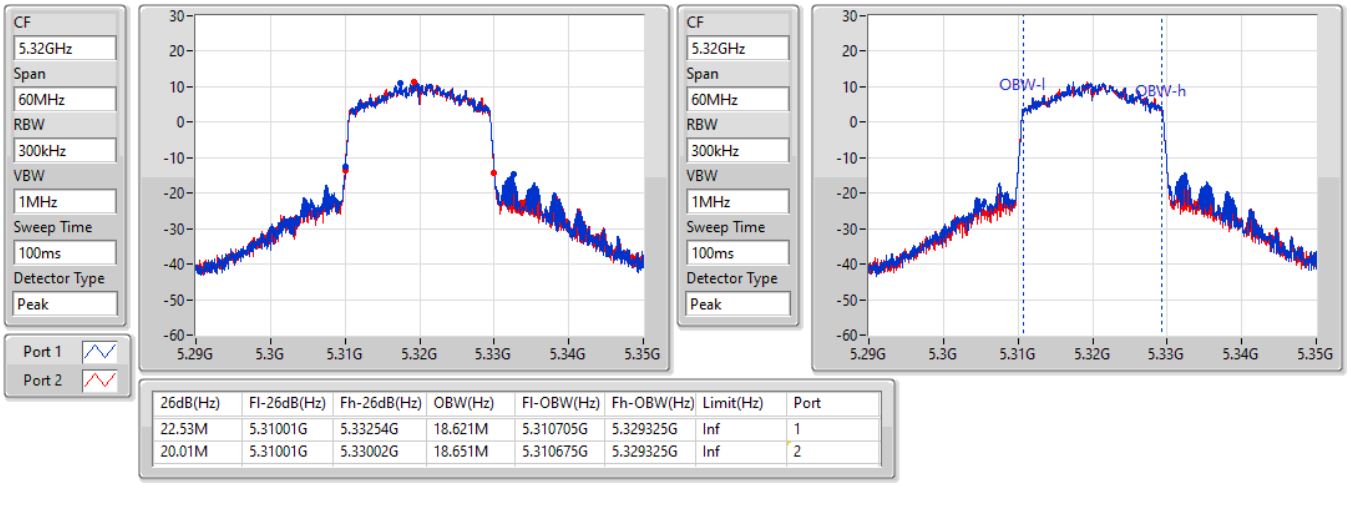


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.53M	5.31001G	5.33254G	18.621M	5.310705G	5.329325G	Inf	1
20.01M	5.31001G	5.33002G	18.651M	5.310675G	5.329325G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5500MHz

03/06/2022

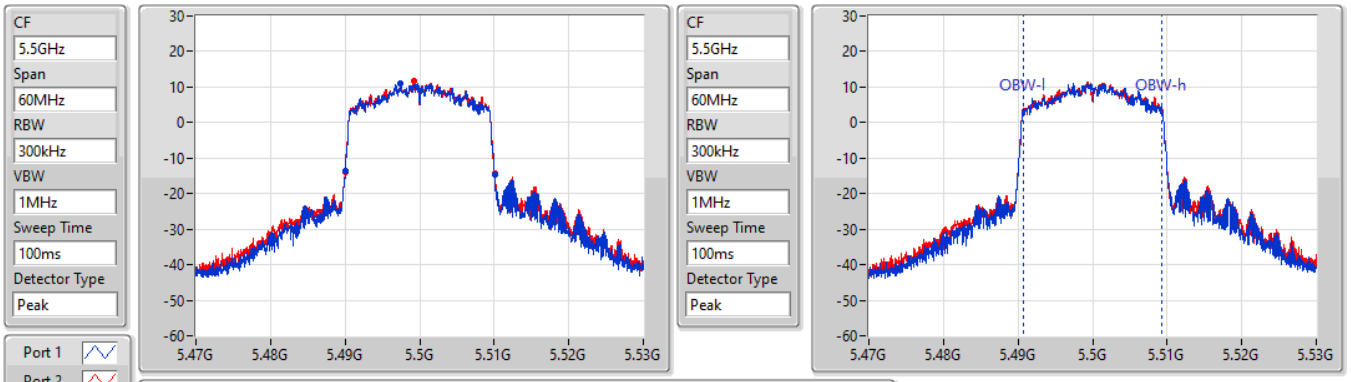


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.04M	5.49001G	5.51005G	18.621M	5.490705G	5.509325G	Inf	1
20.07M	5.48998G	5.51005G	18.651M	5.490675G	5.509325G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5580MHz


20/05/2022

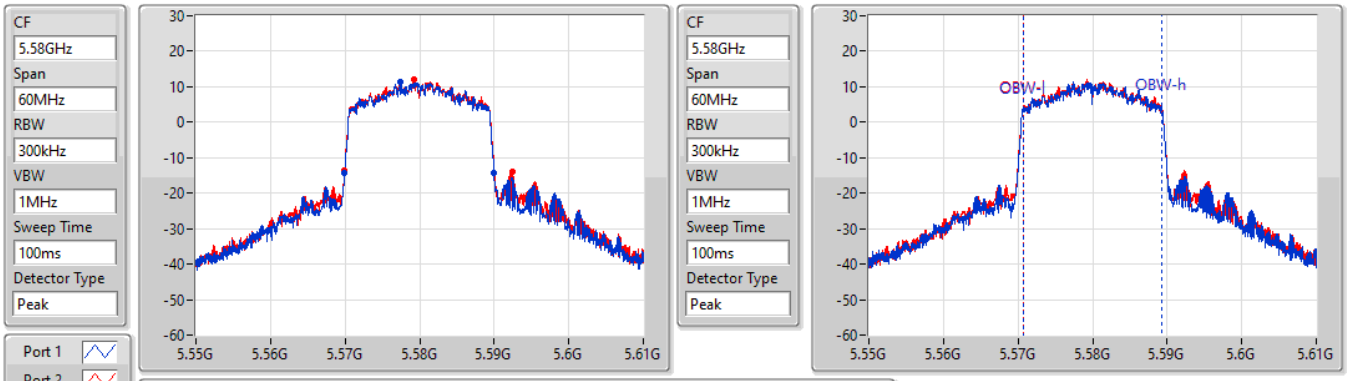

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.04M	5.56995G	5.58999G	18.651M	5.570645G	5.589295G	Inf	1
22.47M	5.56995G	5.59242G	18.651M	5.570645G	5.589295G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5700MHz

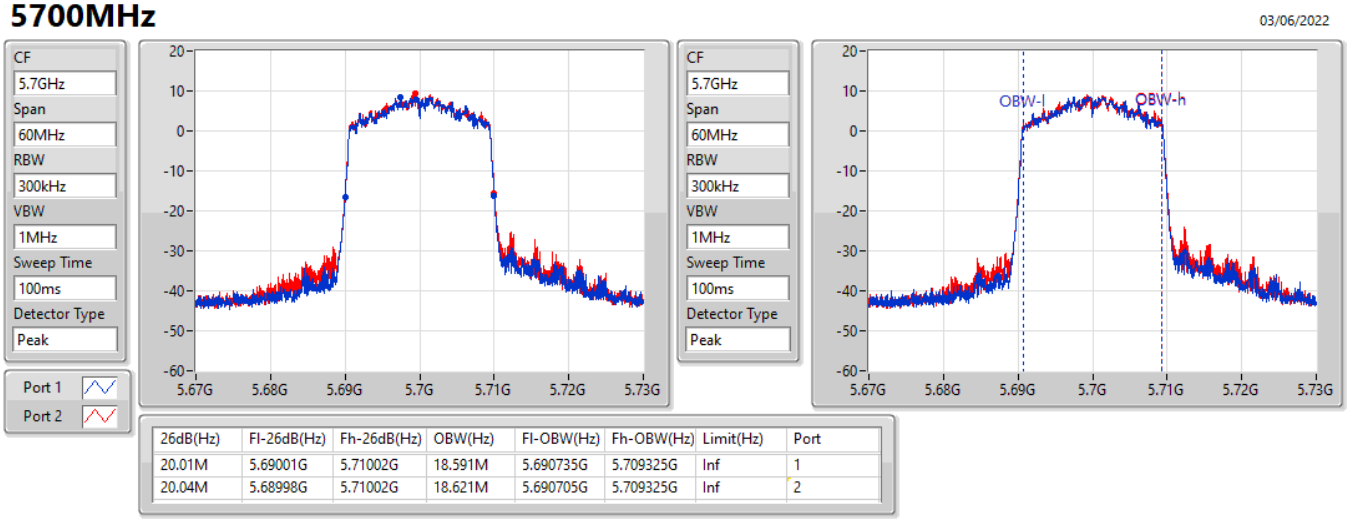

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.01M	5.69001G	5.71002G	18.591M	5.690735G	5.709325G	Inf	1
20.04M	5.68998G	5.71002G	18.621M	5.690705G	5.709325G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5720MHz Straddle 5.47-5.725GHz

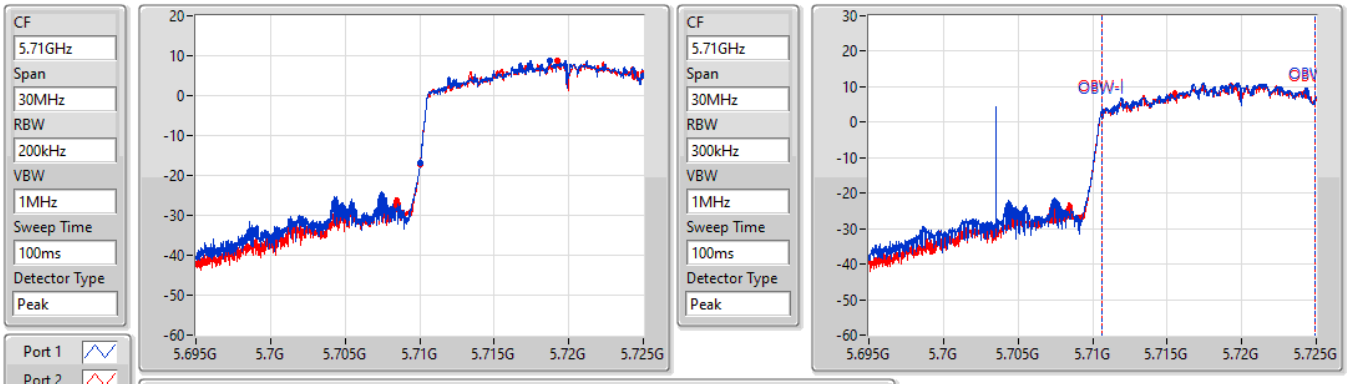

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.955M	5.710045G	5.725G	14.288M	5.710615G	5.724903G	Inf	1
14.955M	5.710045G	5.725G	14.273M	5.71063G	5.724903G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5720MHz Straddle 5.725-5.85GHz

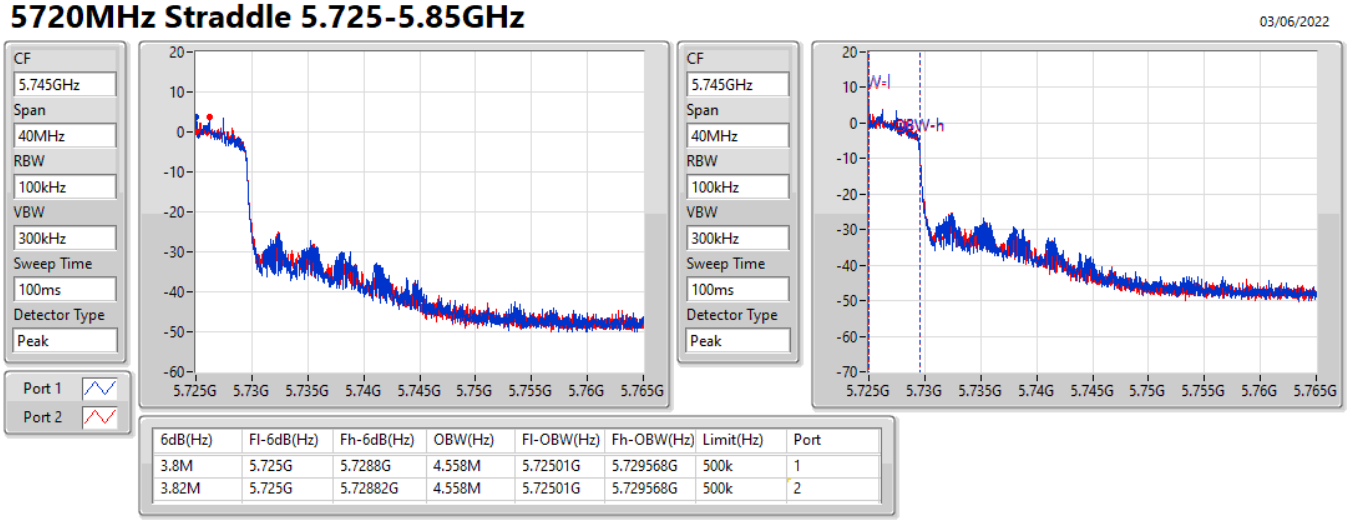

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.8M	5.725G	5.7288G	4.558M	5.72501G	5.729568G	500k	1
3.82M	5.725G	5.72882G	4.558M	5.72501G	5.729568G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

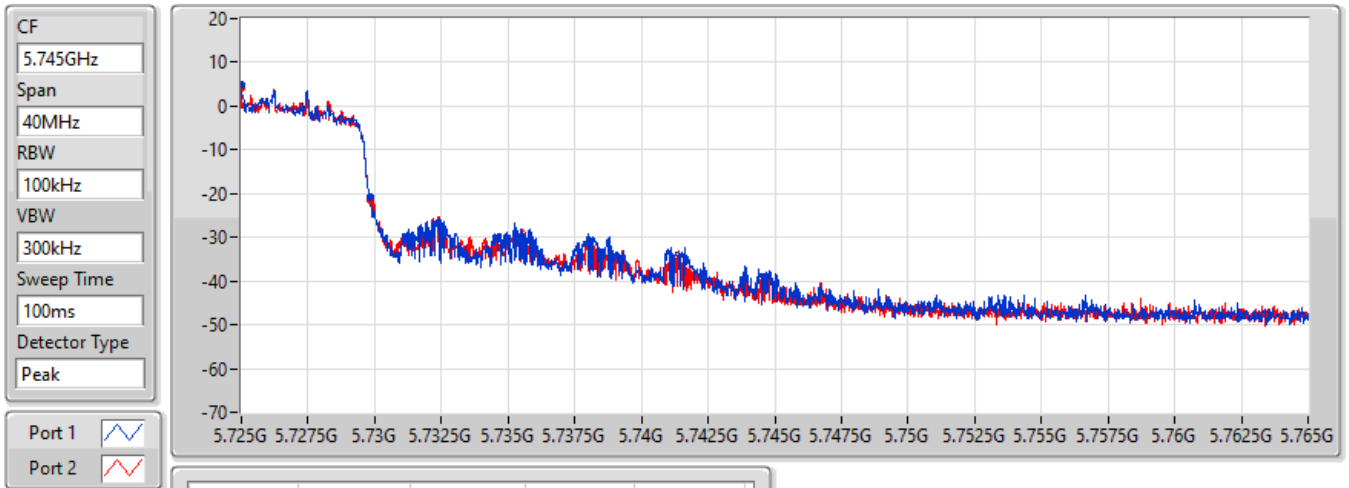


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
4.82M	5.725G	5.72982G	Inf	1
4.86M	5.725G	5.72986G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

03/06/2022

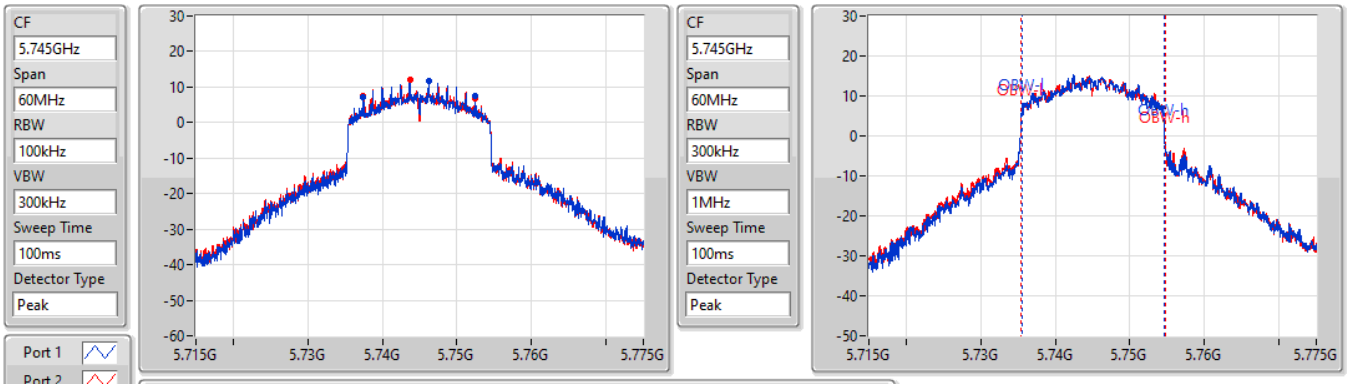


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.03M	5.73744G	5.75247G	19.13M	5.735495G	5.754625G	500k	1
15.03M	5.73747G	5.7525G	19.25M	5.735465G	5.754715G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

03/06/2022

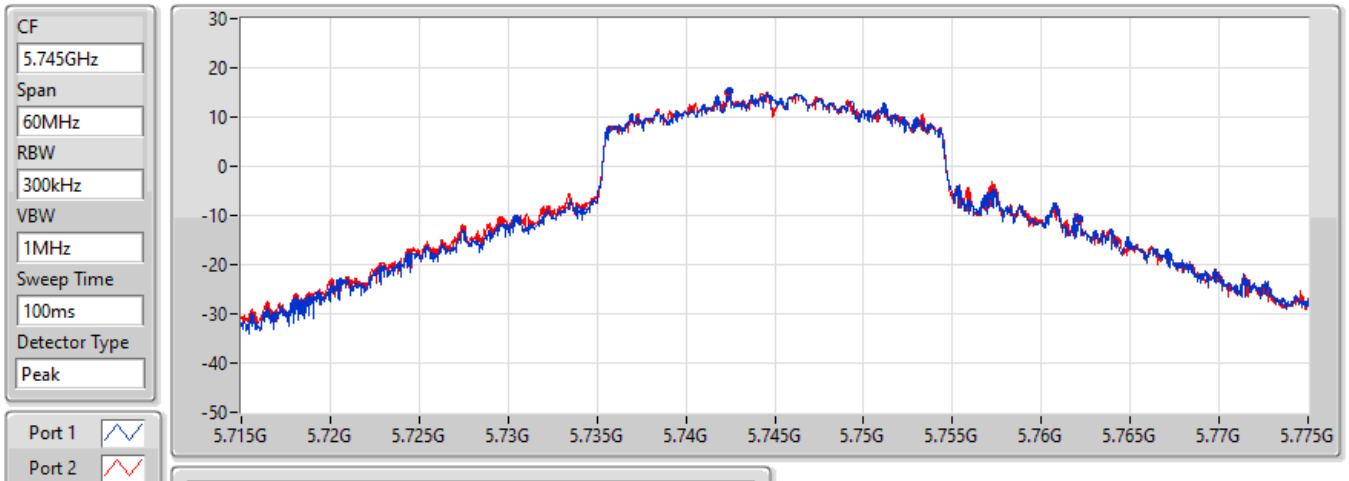


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
31.62M	5.73048G	5.7621G	Inf	1
32.58M	5.72955G	5.76213G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz

03/06/2022

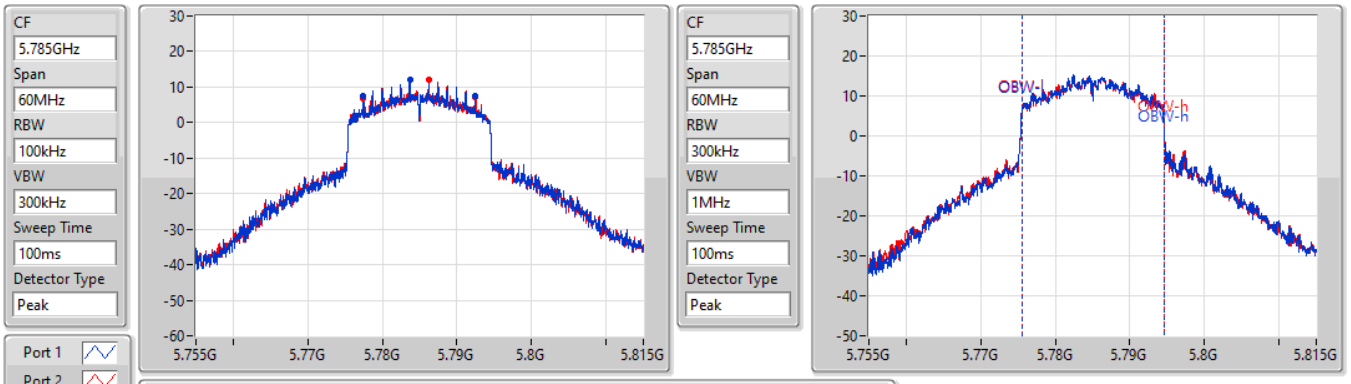


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.03M	5.77744G	5.79247G	19.19M	5.775495G	5.794685G	500k	1
15.06M	5.77744G	5.7925G	19.13M	5.775495G	5.794625G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz


03/06/2022

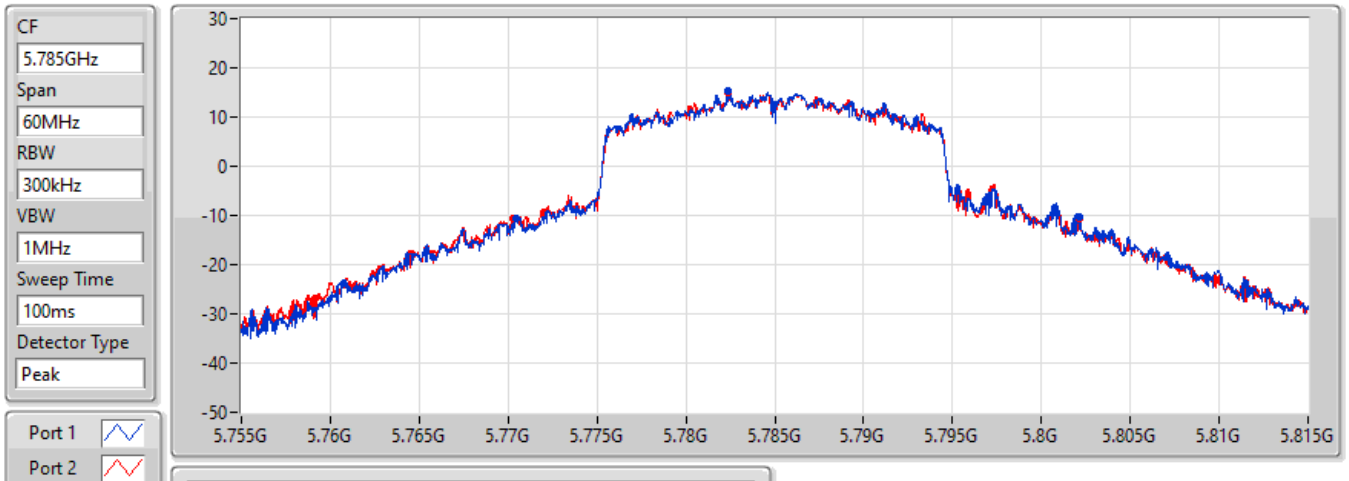

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
31.62M	5.77048G	5.8021G	Inf	1
31.86M	5.77024G	5.8021G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5825MHz

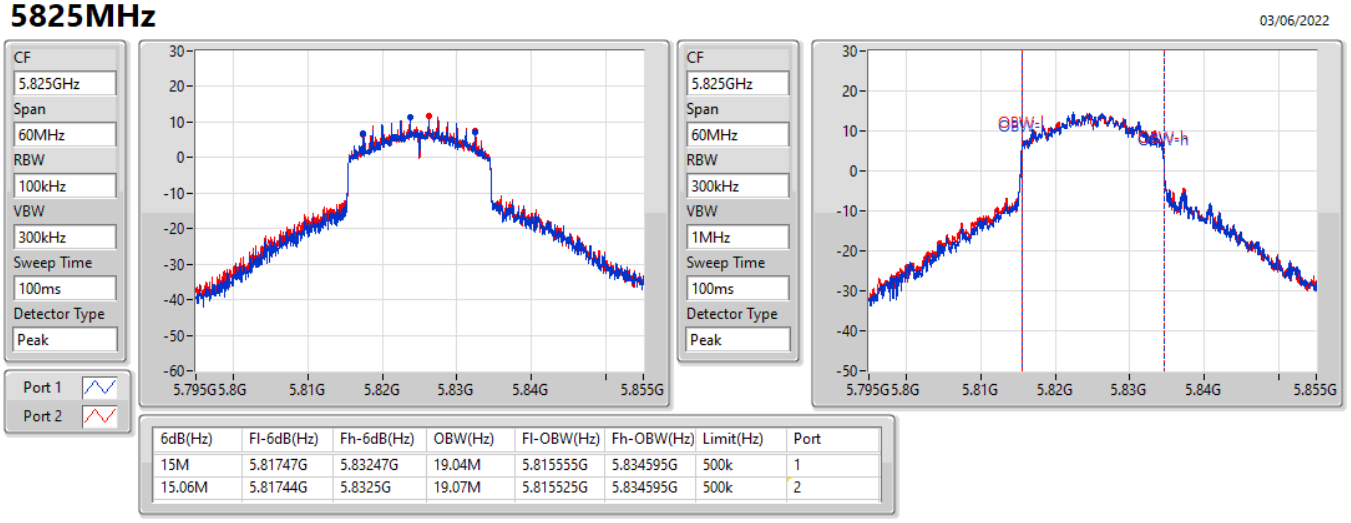

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15M	5.81747G	5.83247G	19.04M	5.815555G	5.834595G	500k	1
15.06M	5.81744G	5.8325G	19.07M	5.815525G	5.834595G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz

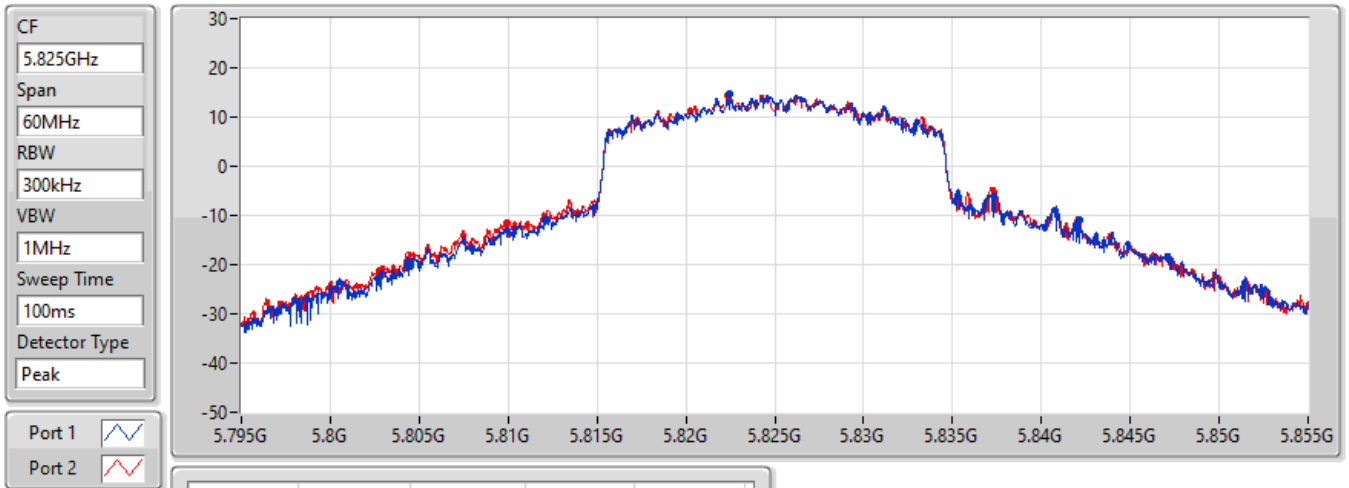


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
30M	5.8121G	5.8421G	Inf	1
32.22M	5.80991G	5.84213G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5190MHz

03/06/2022

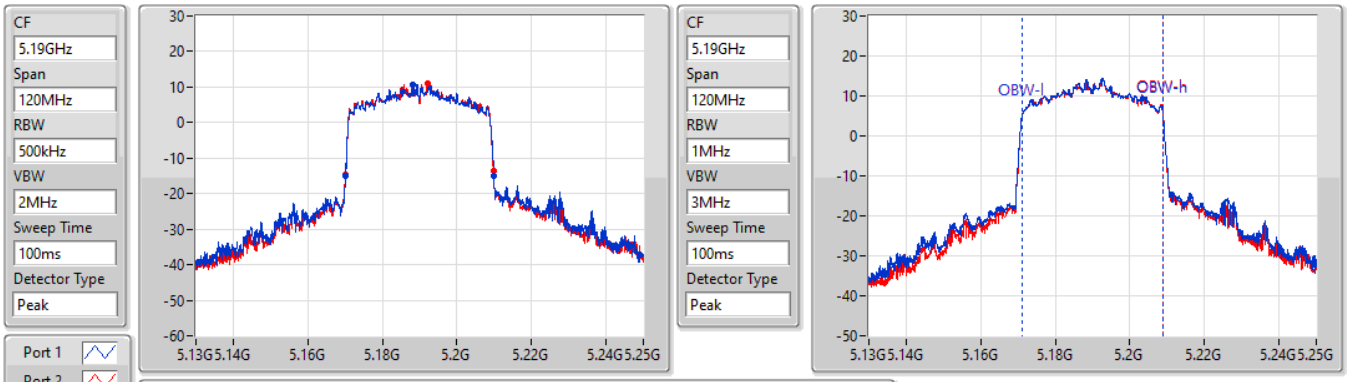


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.84M	5.17008G	5.20992G	37.541M	5.171229G	5.208771G	Inf	1
39.72M	5.17008G	5.2098G	37.541M	5.171229G	5.208771G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5230MHz

20/05/2022

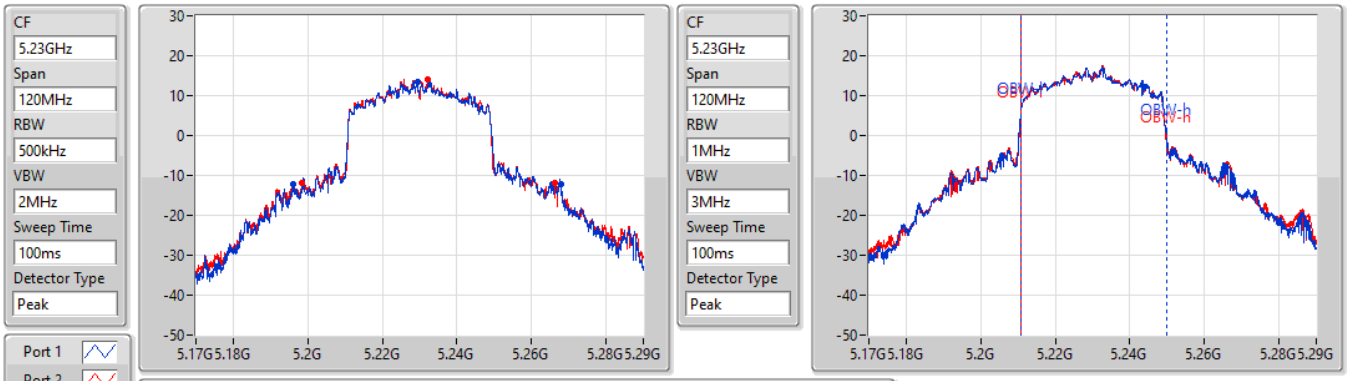


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
71.7M	5.1961G	5.2678G	39.04M	5.21075G	5.24979G	Inf	1
67.86M	5.19844G	5.2663G	39.1M	5.21069G	5.24979G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5270MHz

20/05/2022

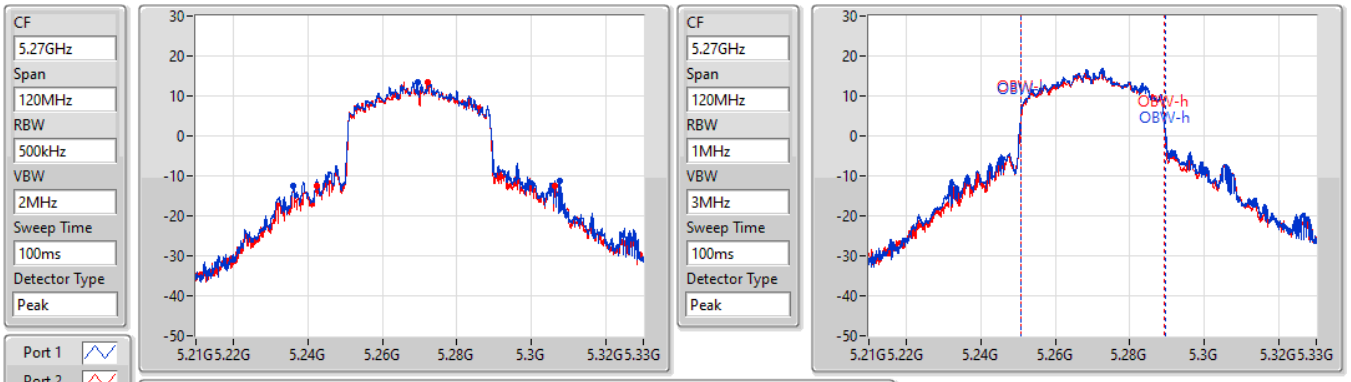


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
71.64M	5.23604G	5.30768G	38.861M	5.25081G	5.28967G	Inf	1
64.02M	5.24228G	5.3063G	38.381M	5.25093G	5.28931G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5310MHz

20/05/2022

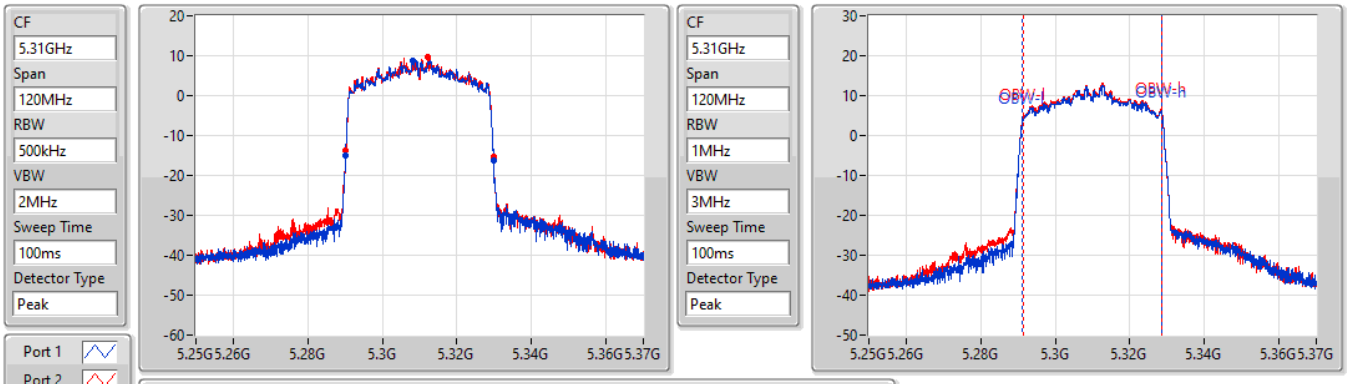


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.72M	5.29014G	5.32986G	37.481M	5.291229G	5.328711G	Inf	1
39.6M	5.2902G	5.3298G	37.361M	5.291289G	5.328651G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5510MHz

03/06/2022

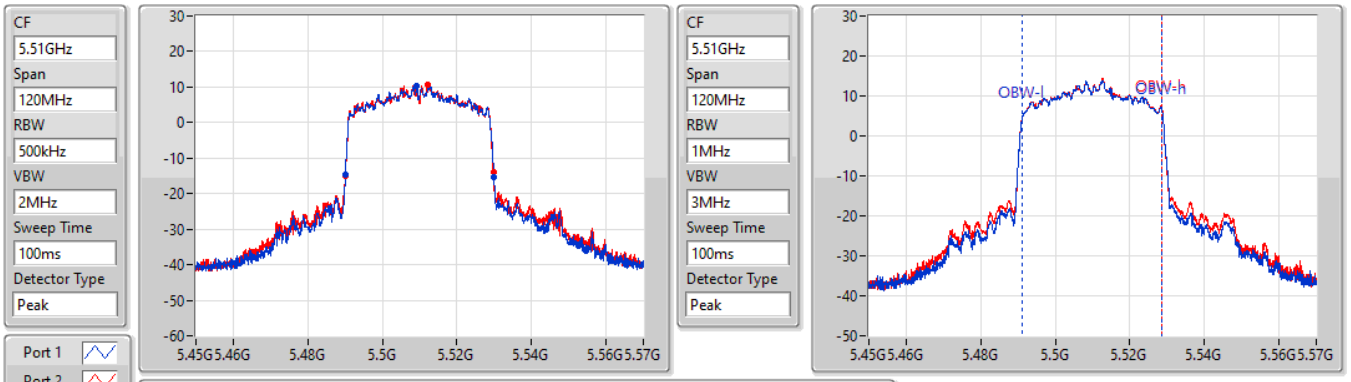


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.84M	5.49008G	5.52992G	37.481M	5.491229G	5.528711G	Inf	1
39.66M	5.49008G	5.52974G	37.481M	5.491229G	5.528711G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5550MHz


20/05/2022

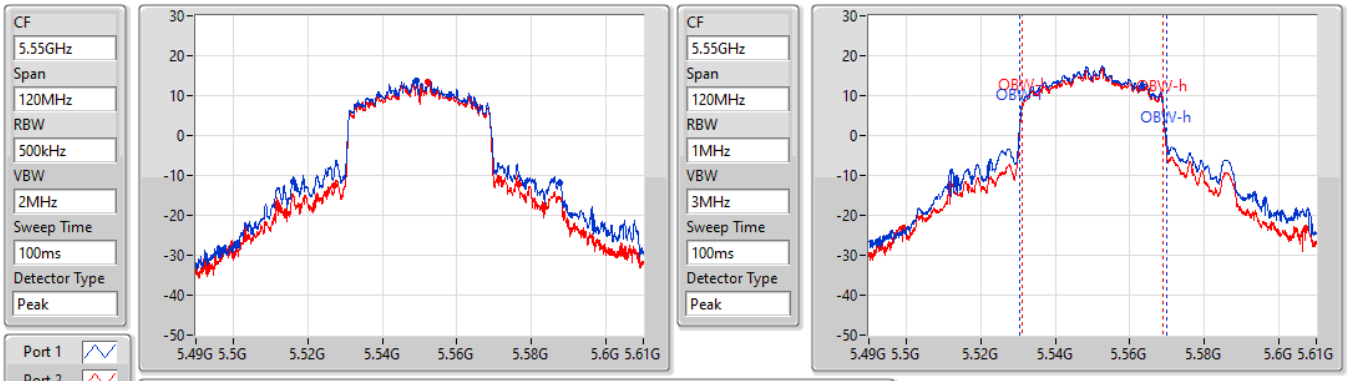

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
71.76M	5.51598G	5.58774G	39.4M	5.53057G	5.56997G	Inf	1
49.38M	5.5272G	5.57658G	38.021M	5.53099G	5.56901G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW


5670MHz

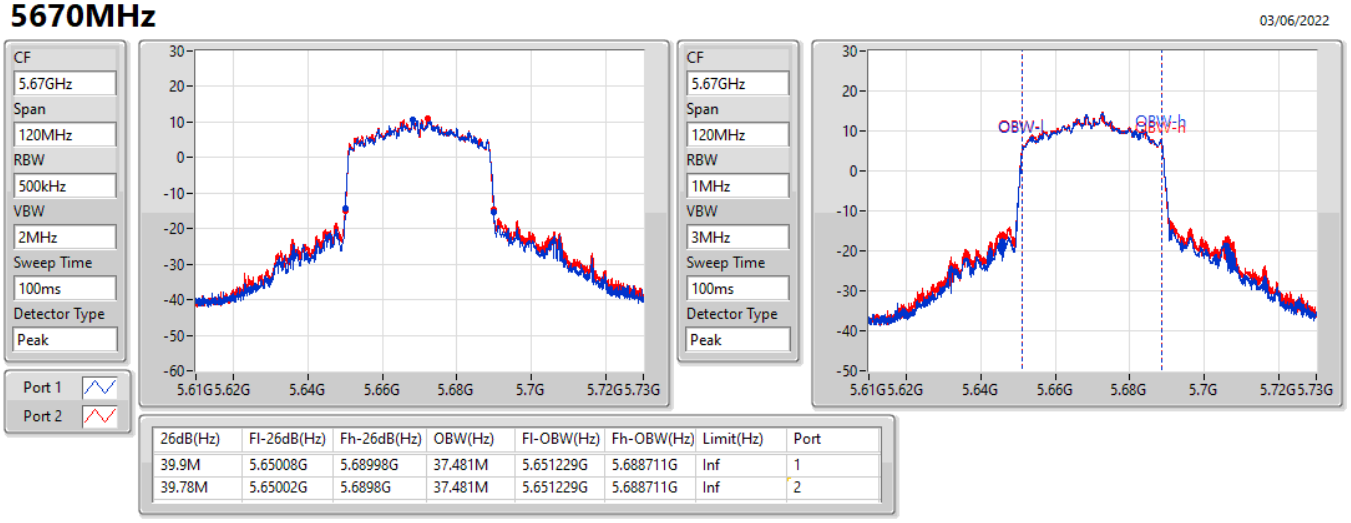

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.9M	5.65008G	5.68998G	37.481M	5.651229G	5.688711G	Inf	1
39.78M	5.65002G	5.6898G	37.481M	5.651229G	5.688711G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5710MHz Straddle 5.47-5.725GHz

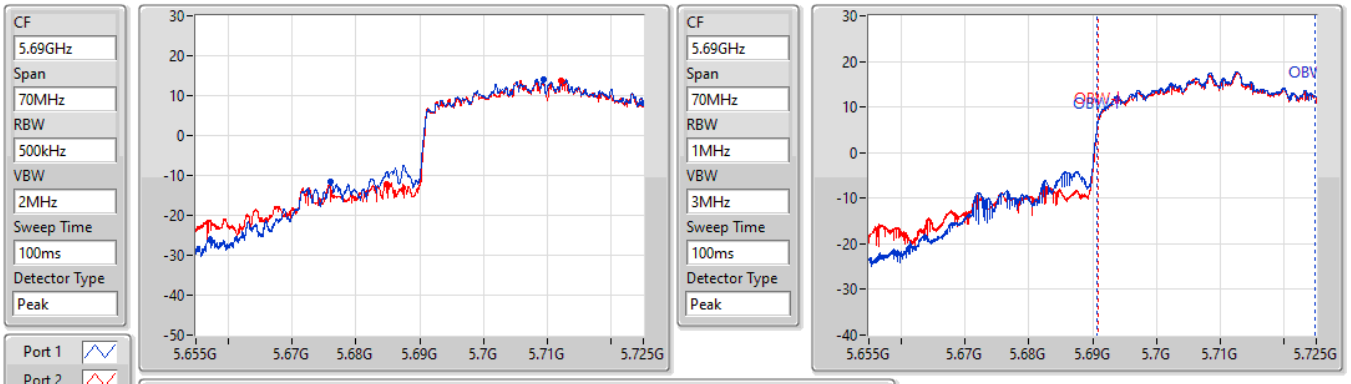


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
48.965M	5.676035G	5.725G	34.073M	5.690665G	5.724738G	Inf	1
40.18M	5.68482G	5.725G	33.933M	5.690805G	5.724738G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5710MHz Straddle 5.725-5.85GHz

03/06/2022

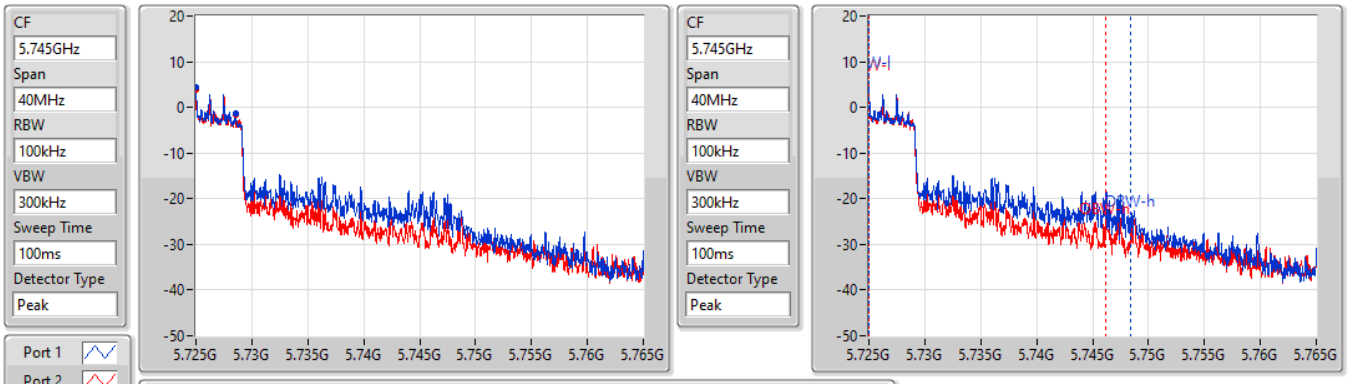


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.56M	5.725G	5.72856G	23.388M	5.72501G	5.748398G	500k	1
3.58M	5.725G	5.72858G	21.169M	5.72501G	5.746179G	500k	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5710MHz Straddle 5.725-5.85GHz

03/06/2022

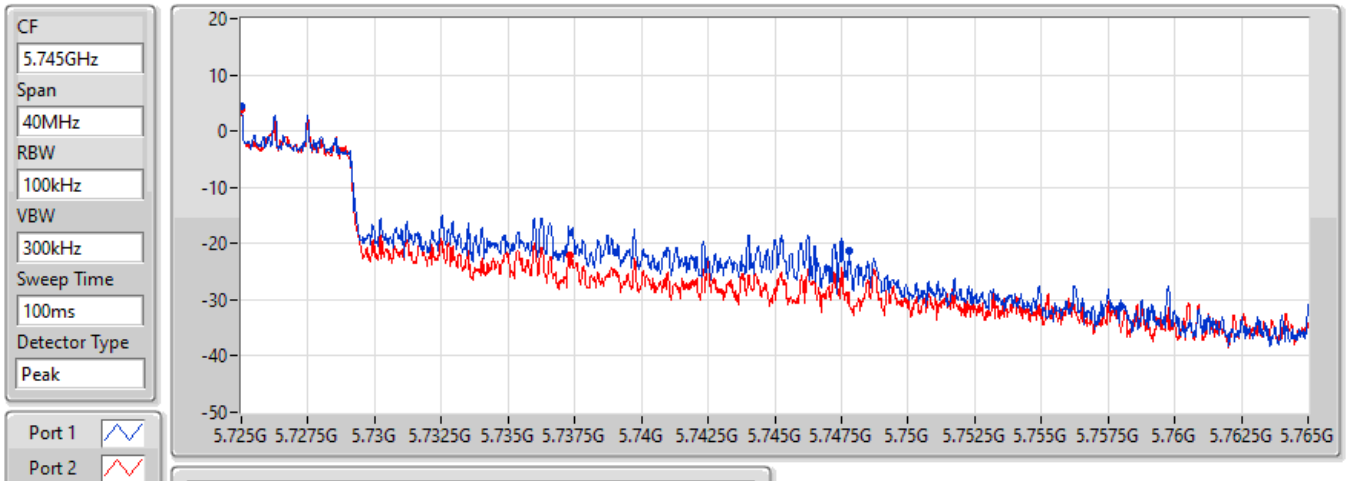


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
22.78M	5.725G	5.74778G	Inf	1
12.3M	5.725G	5.7373G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5755MHz

03/06/2022

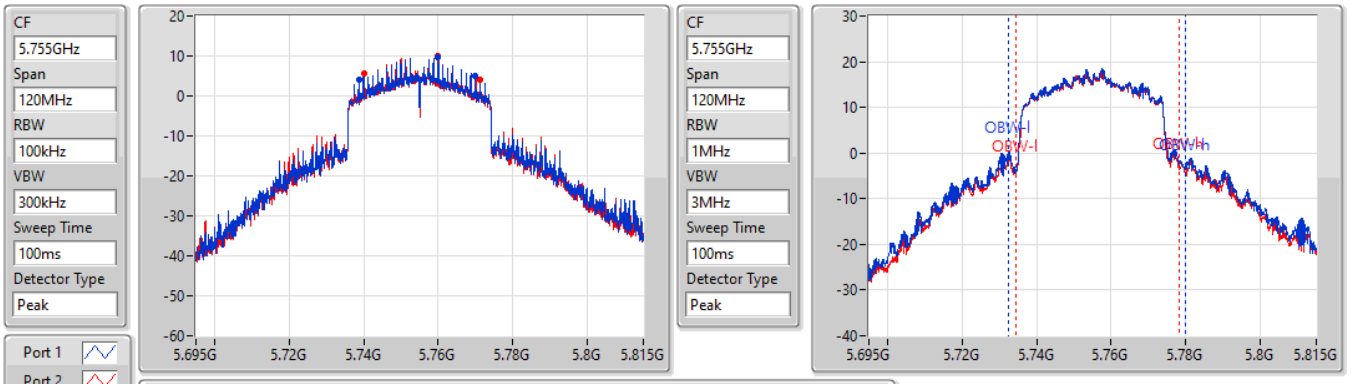


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.26M	5.73868G	5.76994G	47.316M	5.732511G	5.779828G	500k	1
31.26M	5.74G	5.77126G	44.018M	5.73431G	5.778328G	500k	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5755MHz


03/06/2022

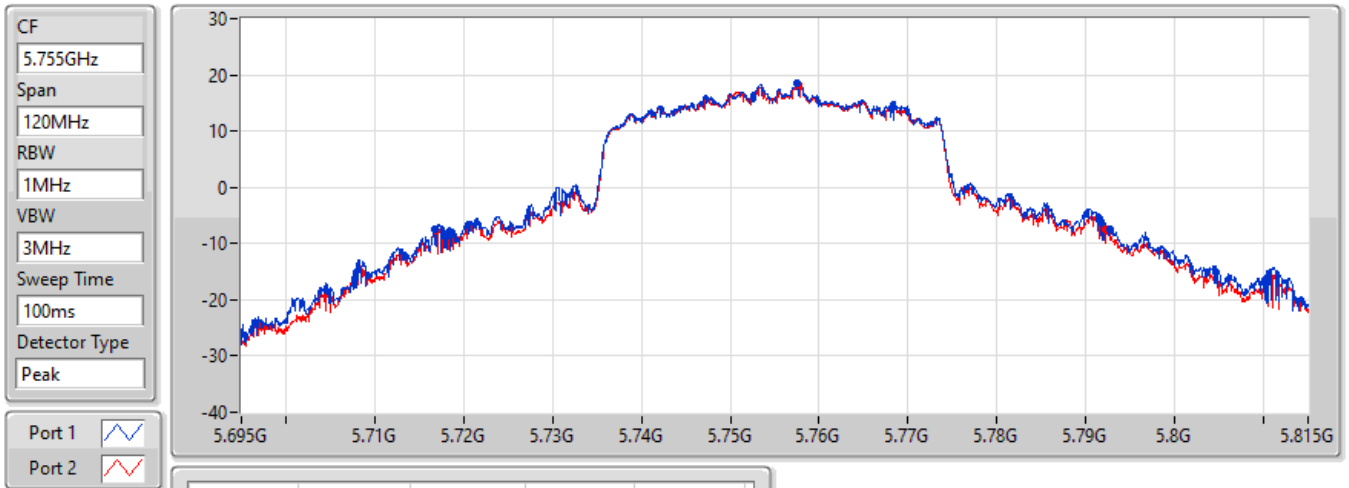

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
76.02M	5.71672G	5.79274G	Inf	1
75.3M	5.71696G	5.79226G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW


5795MHz

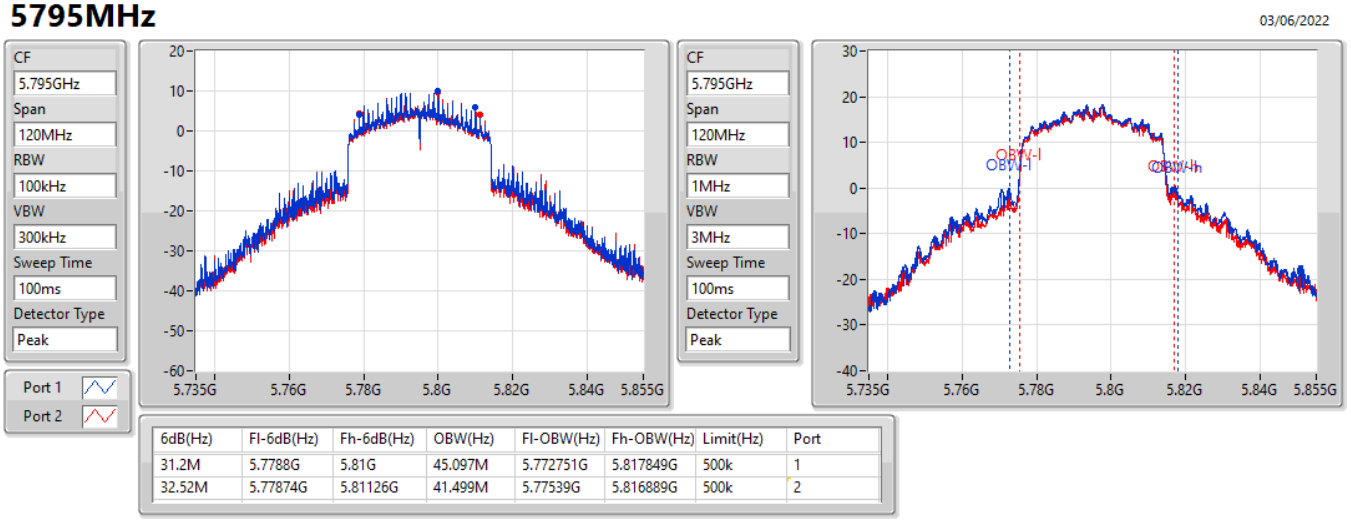

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.2M	5.7788G	5.81G	45.097M	5.772751G	5.817849G	500k	1
32.52M	5.77874G	5.81126G	41.499M	5.77539G	5.816889G	500k	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW


5795MHz

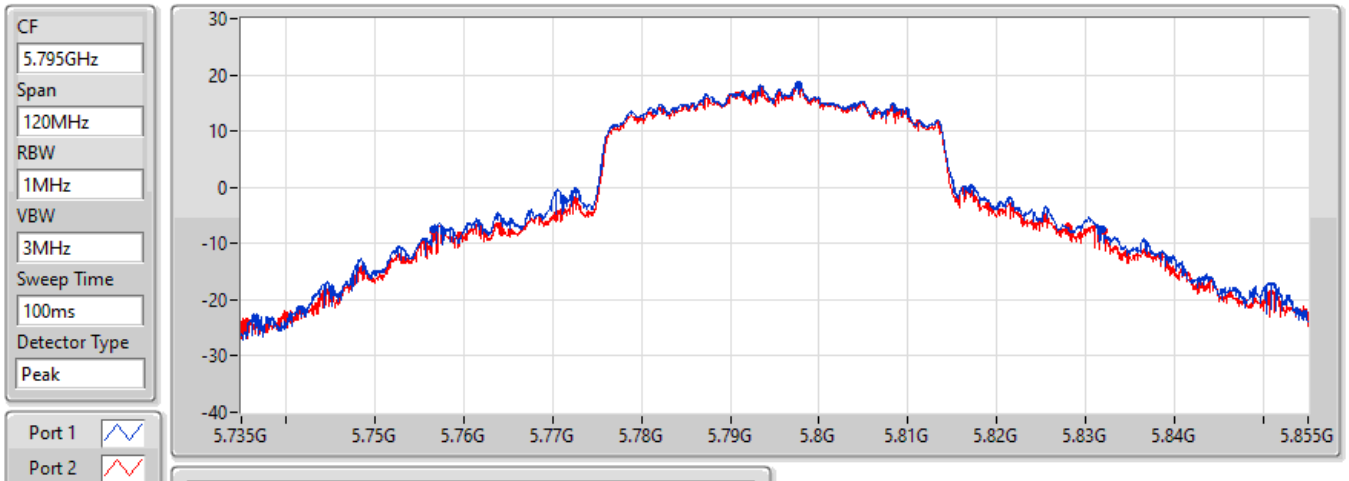

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
75.18M	5.75666G	5.83184G	Inf	1
75.3M	5.75666G	5.83196G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW


5210MHz

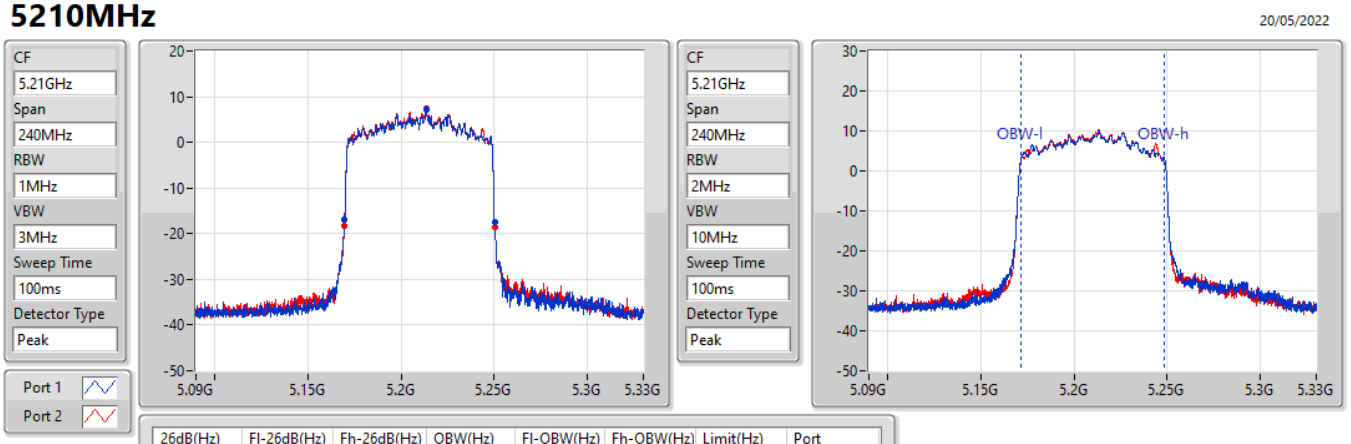

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.16968G	5.2502G	77.001M	5.171619G	5.248621G	Inf	1
80.52M	5.16968G	5.2502G	77.001M	5.171619G	5.248621G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5290MHz

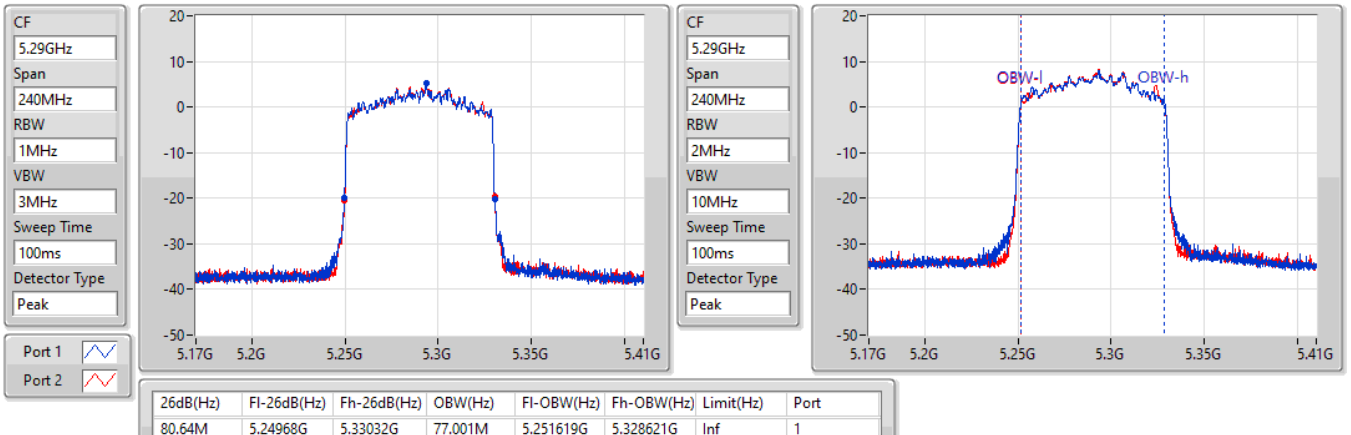


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.64M	5.24968G	5.33032G	77.001M	5.251619G	5.328621G	Inf	1
80.52M	5.24968G	5.3302G	77.001M	5.251619G	5.328621G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5530MHz

20/05/2022

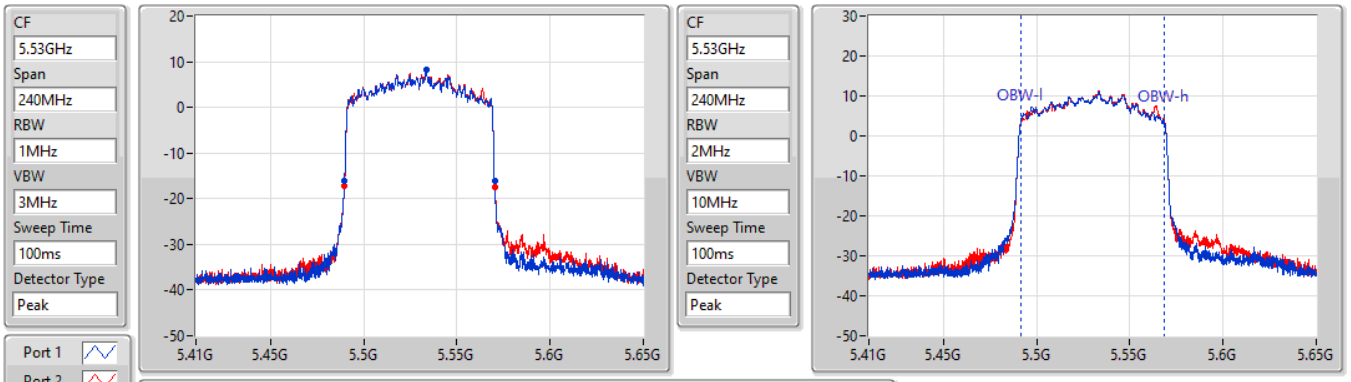


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.48968G	5.5702G	76.882M	5.491619G	5.568501G	Inf	1
80.52M	5.48968G	5.5702G	77.001M	5.491619G	5.568621G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5610MHz

20/05/2022

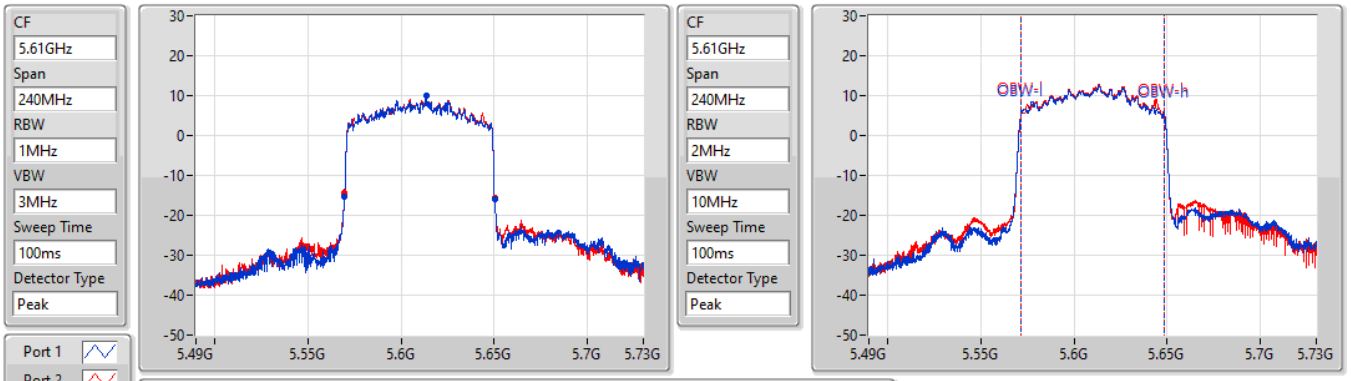


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.56968G	5.6502G	77.001M	5.571619G	5.648621G	Inf	1
80.4M	5.5698G	5.6502G	77.001M	5.571619G	5.648621G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX **EBW**

5690MHz Straddle 5.47-5.725GHz

03/06/2022

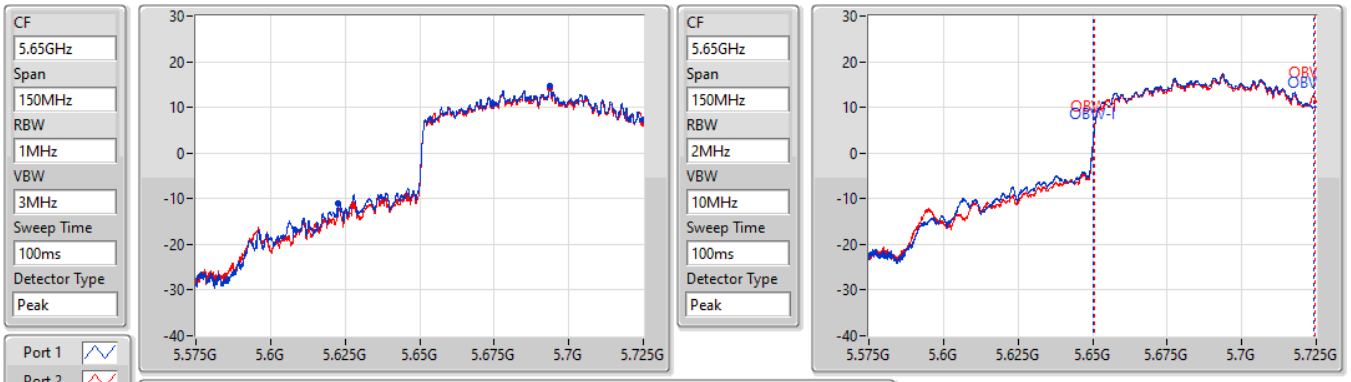


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
102.3M	5.6227G	5.725G	73.763M	5.6503G	5.724063G	Inf	1
97.425M	5.627575G	5.725G	73.838M	5.6506G	5.724438G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX **EBW**

5690MHz Straddle 5.725-5.85GHz

03/06/2022

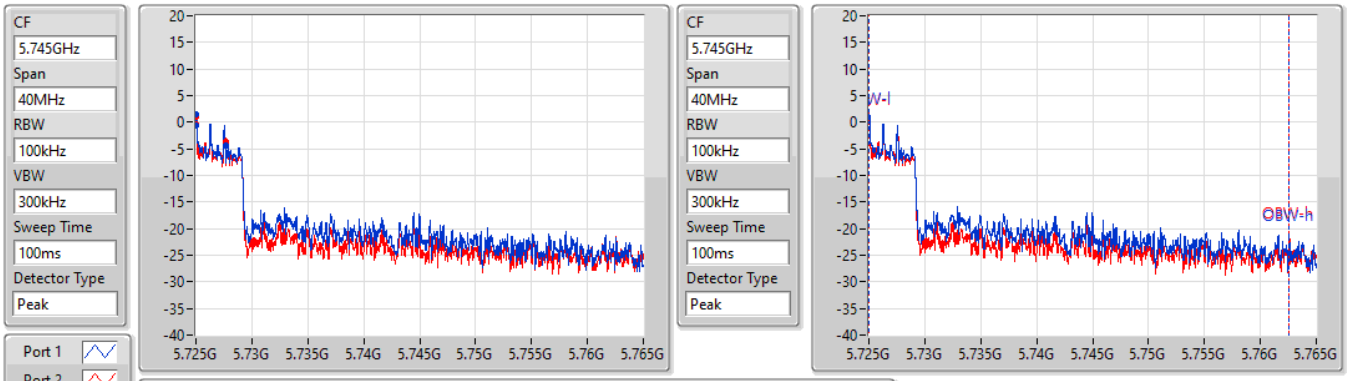


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.62M	5.725G	5.72762G	37.521M	5.72501G	5.762531G	500k	1
2.62M	5.725G	5.72762G	37.581M	5.72501G	5.762591G	500k	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5690MHz Straddle 5.725-5.85GHz

03/06/2022

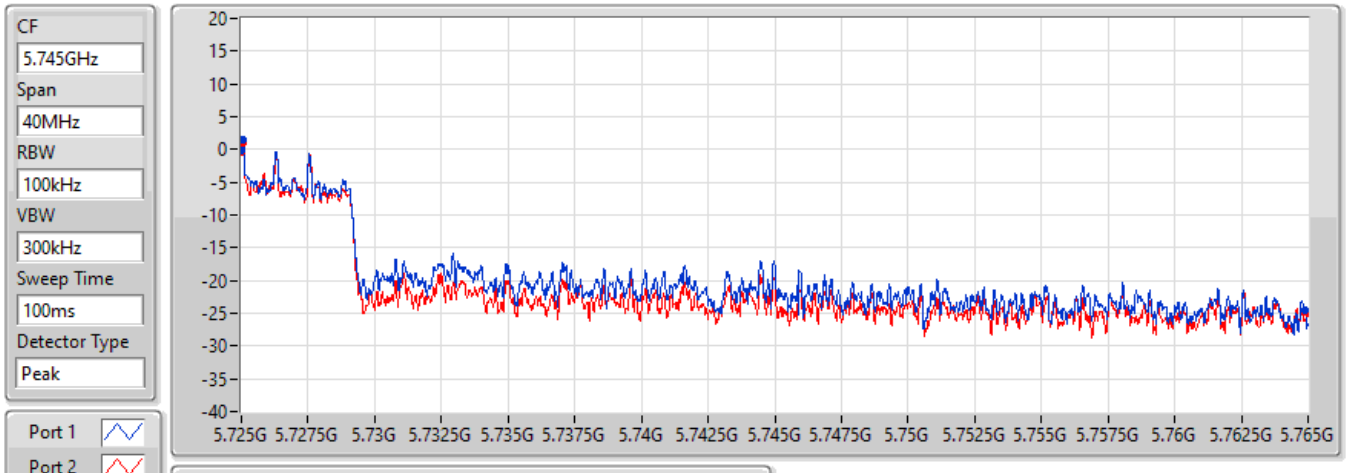


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
39.88M	5.725G	5.76488G	Inf	1
39.98M	5.725G	5.76498G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5775MHz

03/06/2022

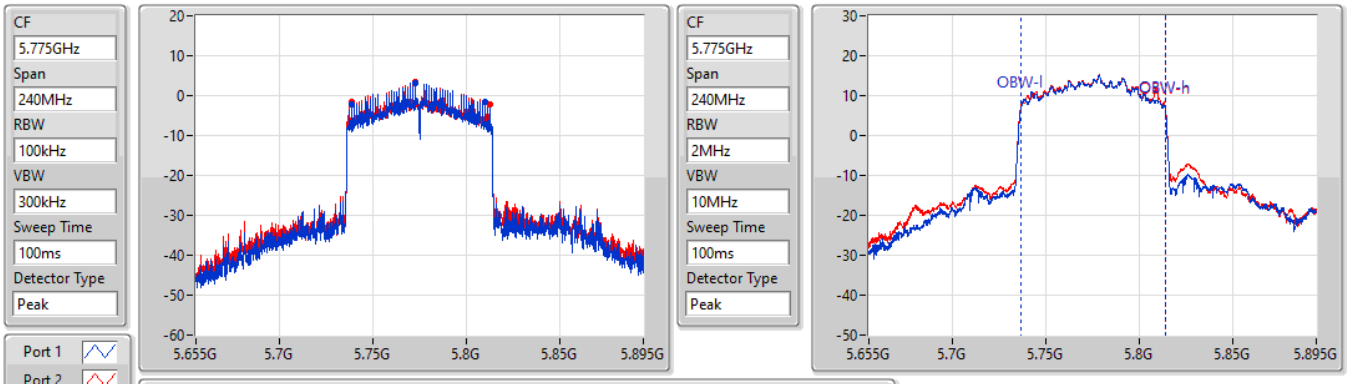


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
71.28M	5.73876G	5.81004G	77.481M	5.736619G	5.8141G	500k	1
73.8M	5.73876G	5.81256G	77.961M	5.736379G	5.81434G	500k	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5775MHz

03/06/2022

CF 5.775GHz
Span 240MHz
RBW 2MHz
VBW 10MHz
Sweep Time 100ms
Detector Type Peak
Port 1
Port 2

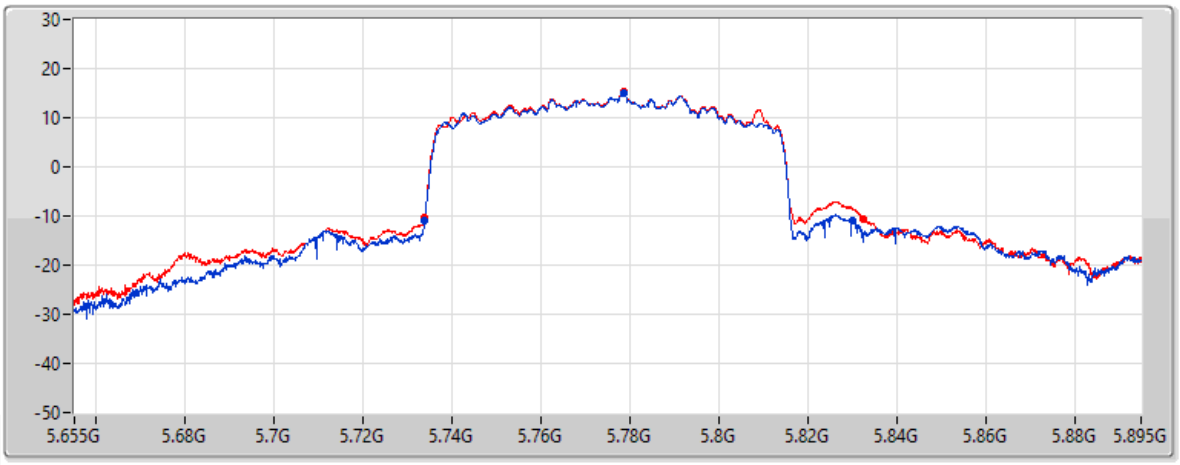


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
96.36M	5.73384G	5.8302G	Inf	1
98.76M	5.73372G	5.83248G	Inf	2

802.11ax HEW160_Nss1,(MCS0)_2TX EBW


5250MHz Straddle 5.15-5.25GHz

03/06/2022

CF 5.17GHz
Span 160MHz
RBW 2MHz
VBW 10MHz
Sweep Time 100ms
Detector Type Peak
Port 1
Port 2

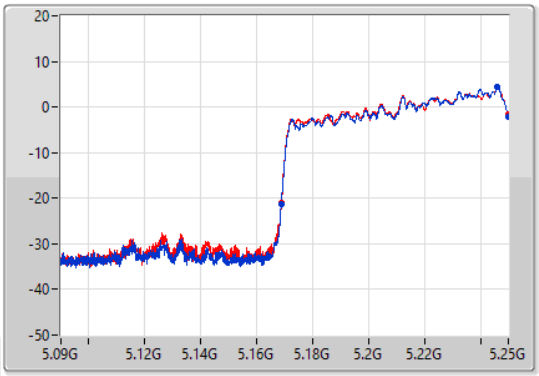

CF 5.17GHz
Span 160MHz
RBW 3MHz
VBW 10MHz
Sweep Time 100ms
Detector Type Peak

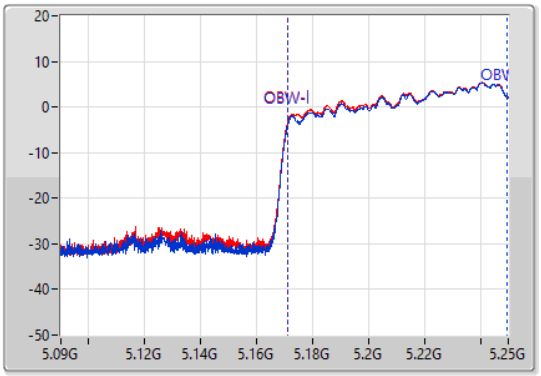


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
81.2M	5.1688G	5.25G	78.361M	5.171279G	5.24964G	Inf	1
81.12M	5.16888G	5.25G	78.361M	5.171199G	5.24956G	Inf	2

802.11ax HEW160_Nss1,(MCS0)_2TX **EBW**

5250MHz Straddle 5.25-5.35GHz

03/06/2022

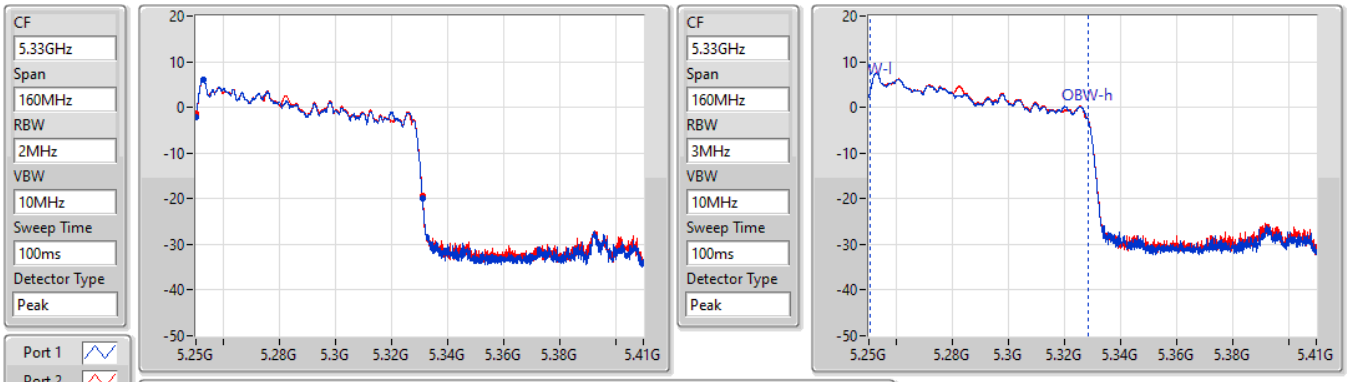


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
81.04M	5.25G	5.33104G	77.961M	5.25044G	5.328401G	Inf	1
80.96M	5.25G	5.33096G	77.961M	5.25044G	5.328401G	Inf	2

802.11ax HEW160_Nss1,(MCS0)_2TX **EBW**

5570MHz

03/06/2022

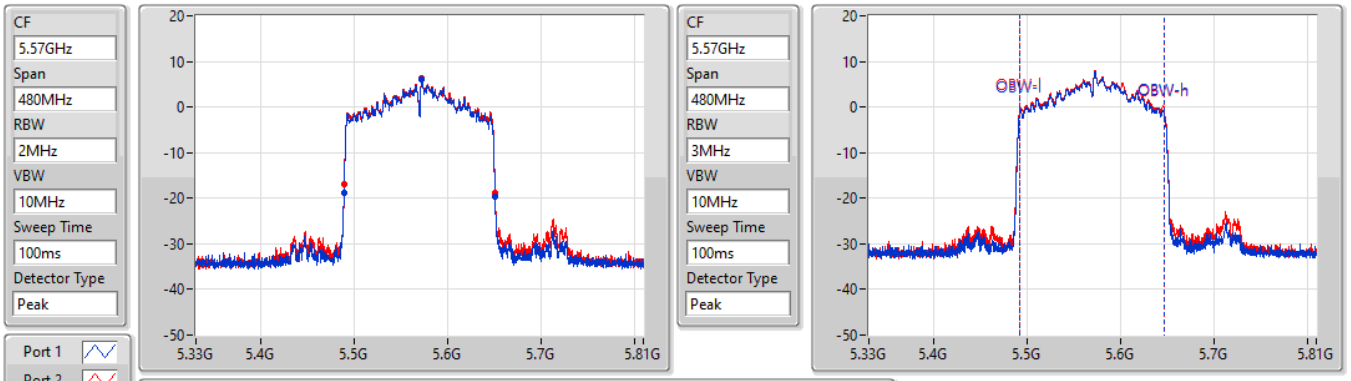

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
162M	5.48888G	5.65088G	154.963M	5.492039G	5.647001G	Inf	1
161.76M	5.48912G	5.65088G	155.202M	5.492039G	5.647241G	Inf	2

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	19.32M	16.252M	16M3D1D	18.12M	16.192M
802.11ax HEW20_Nss1,(MCS0)_2TX	22.68M	18.651M	18M7D1D	22.23M	18.621M
802.11ax HEW40_Nss1,(MCS0)_2TX	71.7M	39.1M	39M1D1D	39.66M	37.481M
802.11ax HEW80_Nss1,(MCS0)_2TX	80.52M	77.001M	77M0D1D	80.52M	77.001M
802.11ax HEW160_Nss1,(MCS0)_2TX	81.28M	78.281M	78M3D1D	81.12M	78.121M
5.25-5.35GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	23.07M	16.222M	16M2D1D	18.18M	16.192M
802.11ax HEW20_Nss1,(MCS0)_2TX	22.65M	18.651M	18M7D1D	20.01M	18.591M
802.11ax HEW40_Nss1,(MCS0)_2TX	71.64M	38.861M	38M9D1D	39.6M	37.361M
802.11ax HEW80_Nss1,(MCS0)_2TX	80.64M	77.001M	77M0D1D	80.52M	77.001M
802.11ax HEW160_Nss1,(MCS0)_2TX	81.04M	77.881M	77M9D1D	80.88M	77.801M
5.47-5.725GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	18.48M	16.192M	16M2D1D	13.875M	13.028M
802.11ax HEW20_Nss1,(MCS0)_2TX	22.62M	18.651M	18M7D1D	14.88M	14.198M
802.11ax HEW40_Nss1,(MCS0)_2TX	71.76M	39.4M	39M4D1D	34.86M	33.688M
802.11ax HEW80_Nss1,(MCS0)_2TX	80.52M	77.001M	77M0D1D	75.3M	72.789M
802.11ax HEW160_Nss1,(MCS0)_2TX	162M	154.723M	155MD1D	161.76M	154.483M
5.725-5.85GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	15.09M	22.069M	22M1D1D	3.08M	3.398M
802.11ax HEW20_Nss1,(MCS0)_2TX	15.09M	20.24M	20M2D1D	3.36M	4.578M
802.11ax HEW40_Nss1,(MCS0)_2TX	32.58M	47.556M	47M6D1D	3.58M	22.729M
802.11ax HEW80_Nss1,(MCS0)_2TX	75.12M	77.241M	77M2D1D	3.76M	28.566M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	18.21M	16.192M	19.32M	16.222M
5200MHz	Pass	Inf	19.26M	16.252M	18.45M	16.192M
5240MHz	Pass	Inf	18.12M	16.192M	19.23M	16.192M
5260MHz	Pass	Inf	18.24M	16.222M	23.07M	16.222M
5300MHz	Pass	Inf	18.18M	16.192M	18.39M	16.192M
5320MHz	Pass	Inf	18.24M	16.192M	18.45M	16.192M
5500MHz	Pass	Inf	17.97M	16.162M	18.42M	16.192M
5580MHz	Pass	Inf	18.09M	16.192M	18.48M	16.192M
5700MHz	Pass	Inf	17.94M	16.162M	18.39M	16.162M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	13.875M	13.028M	14.535M	13.043M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.08M	3.398M	3.08M	3.478M
5745MHz	Pass	500k	15.03M	20.45M	15.06M	20.96M
5785MHz	Pass	500k	15.09M	20.45M	15.03M	22.069M
5825MHz	Pass	500k	15.03M	19.79M	15.09M	17.631M
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	22.59M	18.651M	22.38M	18.621M
5200MHz	Pass	Inf	22.68M	18.651M	22.23M	18.651M
5240MHz	Pass	Inf	22.56M	18.651M	22.44M	18.651M
5260MHz	Pass	Inf	20.07M	18.591M	20.04M	18.621M
5300MHz	Pass	Inf	22.65M	18.651M	22.41M	18.651M
5320MHz	Pass	Inf	22.53M	18.621M	20.01M	18.651M
5500MHz	Pass	Inf	20.04M	18.621M	22.62M	18.621M
5580MHz	Pass	Inf	20.04M	18.651M	22.47M	18.651M
5700MHz	Pass	Inf	20.01M	18.591M	20.07M	18.591M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	14.88M	14.198M	16.53M	14.213M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.76M	4.578M	3.36M	4.578M
5745MHz	Pass	500k	15.09M	19.91M	15.09M	20.24M
5785MHz	Pass	500k	15.03M	19.34M	15.09M	19.31M
5825MHz	Pass	500k	15.09M	19.58M	15M	19.01M
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	Inf	39.84M	37.601M	39.66M	37.481M
5230MHz	Pass	Inf	71.7M	39.04M	67.86M	39.1M
5270MHz	Pass	Inf	71.64M	38.861M	64.02M	38.381M
5310MHz	Pass	Inf	39.72M	37.481M	39.6M	37.361M
5510MHz	Pass	Inf	39.72M	37.361M	39.66M	37.361M
5550MHz	Pass	Inf	71.76M	39.4M	49.38M	38.021M
5670MHz	Pass	Inf	39.78M	37.421M	39.66M	37.481M
5710MHz Straddle 5.47-5.725GHz	Pass	Inf	40.25M	33.758M	34.86M	33.688M
5710MHz Straddle 5.725-5.85GHz	Pass	500k	3.58M	23.708M	3.9M	22.729M
5755MHz	Pass	500k	32.58M	45.757M	31.32M	43.178M
5795MHz	Pass	500k	31.26M	47.556M	32.58M	41.259M
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	Inf	80.52M	77.001M	80.52M	77.001M
5290MHz	Pass	Inf	80.64M	77.001M	80.52M	77.001M
5530MHz	Pass	Inf	80.52M	76.882M	80.52M	77.001M
5610MHz	Pass	Inf	80.52M	77.001M	80.4M	77.001M
5690MHz Straddle 5.47-5.725GHz	Pass	Inf	75.3M	72.789M	75.3M	73.013M
5690MHz Straddle 5.725-5.85GHz	Pass	500k	3.82M	28.566M	3.76M	29.845M
5775MHz	Pass	500k	75.12M	77.121M	75.12M	77.241M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	Inf	81.12M	78.121M	81.28M	78.281M
5250MHz Straddle 5.25-5.35GHz	Pass	Inf	80.88M	77.801M	81.04M	77.881M
5570MHz	Pass	Inf	161.76M	154.483M	162M	154.723M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11a_Nss1,(6Mbps)_2TX EBW


5180MHz

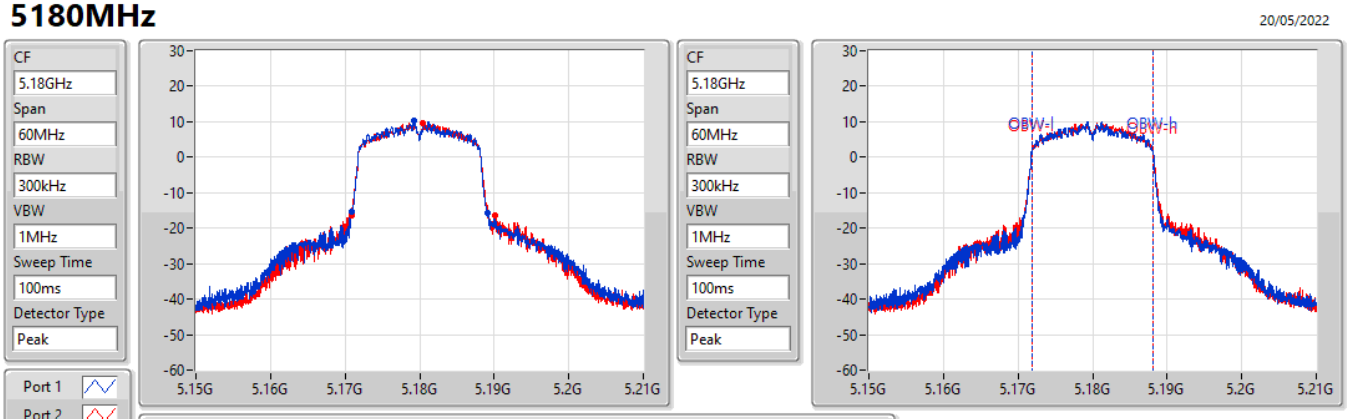

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.21M	5.17082G	5.18903G	16.192M	5.171874G	5.188066G	Inf	1
19.32M	5.17085G	5.19017G	16.222M	5.171874G	5.188096G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5200MHz

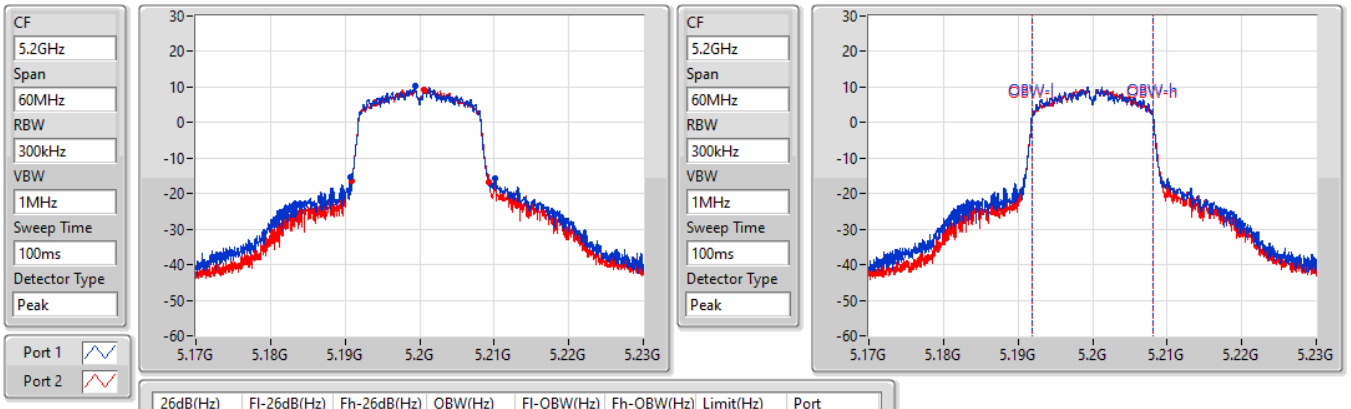

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.26M	5.19079G	5.21005G	16.252M	5.191874G	5.208126G	Inf	1
18.45M	5.19088G	5.20933G	16.192M	5.191904G	5.208096G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5240MHz

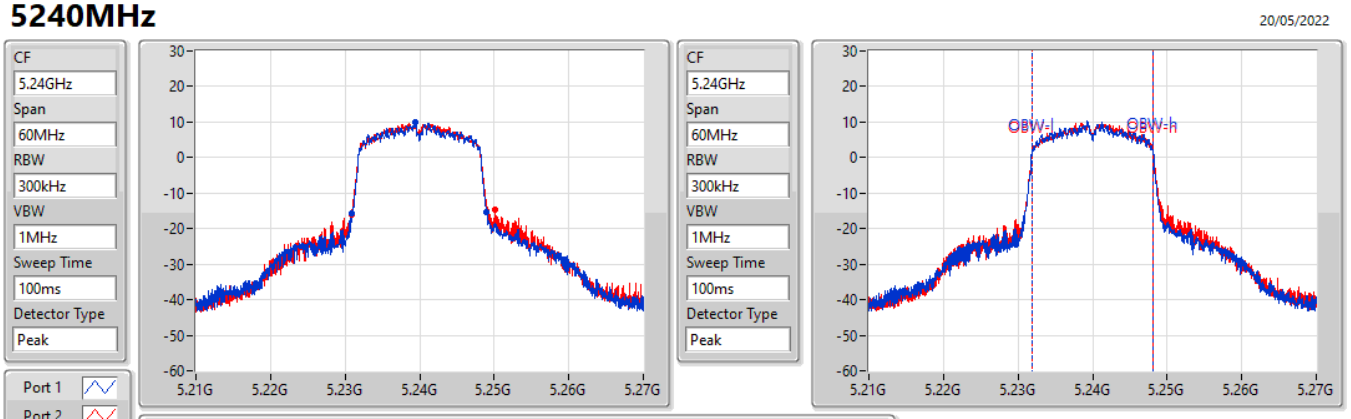

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.12M	5.23088G	5.249G	16.192M	5.231904G	5.248096G	Inf	1
19.23M	5.23091G	5.25014G	16.192M	5.231934G	5.248126G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5260MHz

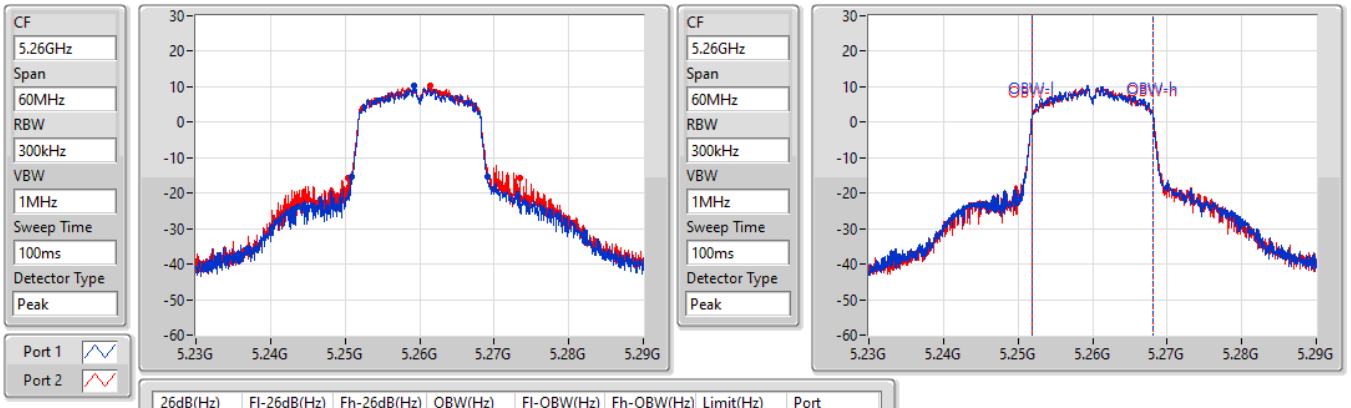

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.24M	5.25082G	5.26906G	16.222M	5.251904G	5.268126G	Inf	1
23.07M	5.25037G	5.27344G	16.222M	5.251904G	5.268126G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5300MHz

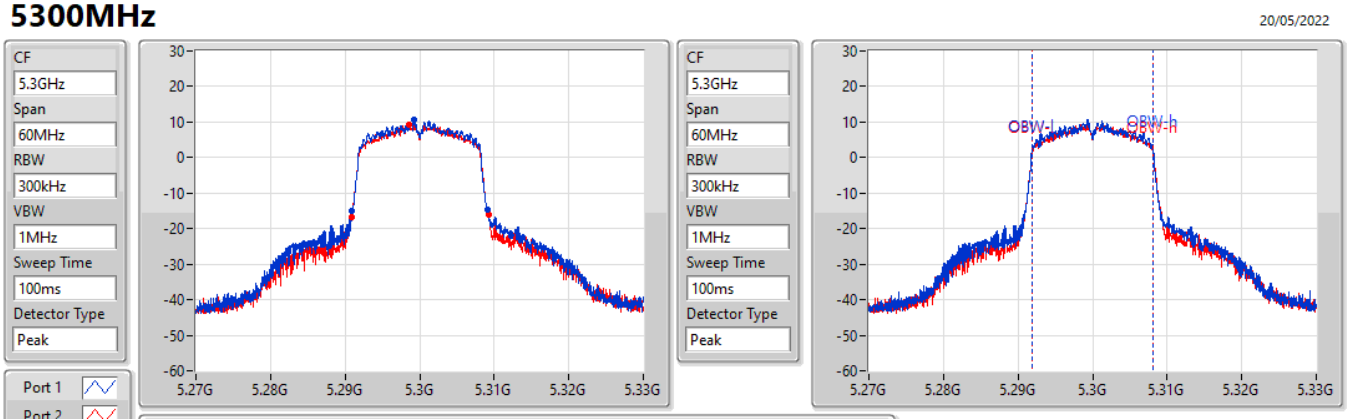

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.18M	5.29085G	5.30903G	16.192M	5.291904G	5.308096G	Inf	1
18.39M	5.29088G	5.30927G	16.192M	5.291904G	5.308096G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5320MHz

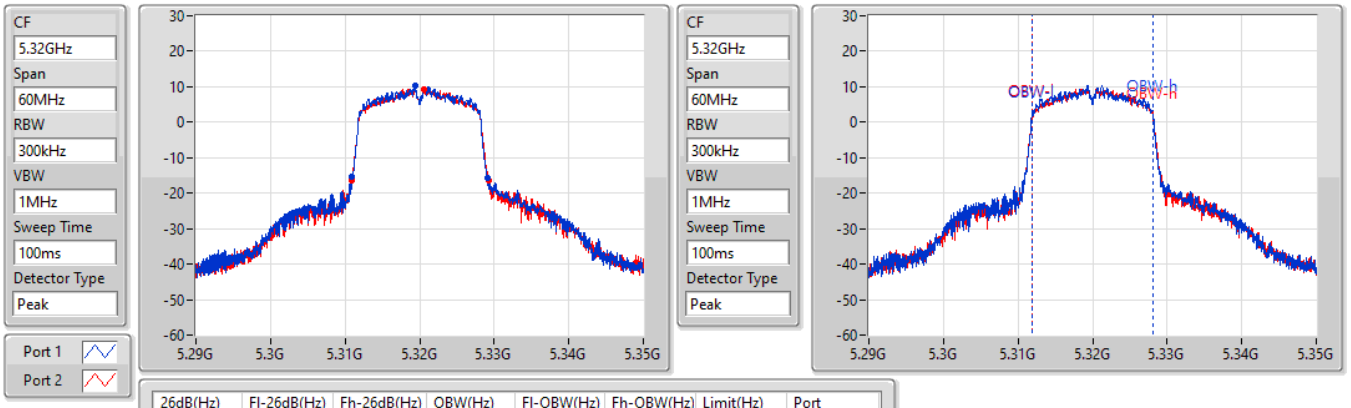

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.24M	5.31085G	5.32909G	16.192M	5.311904G	5.328096G	Inf	1
18.45M	5.31088G	5.32933G	16.192M	5.311934G	5.328126G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5500MHz

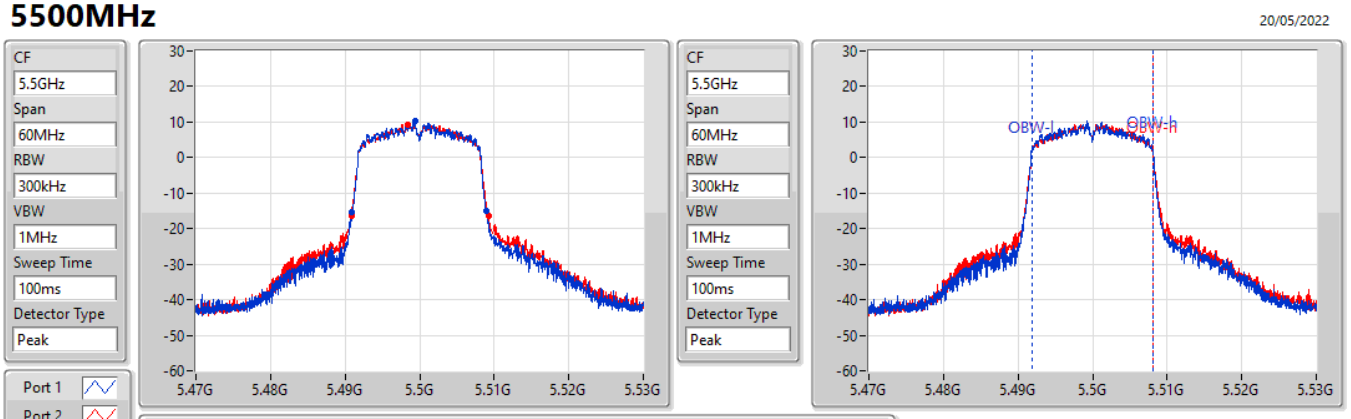

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
17.97M	5.49094G	5.50891G	16.162M	5.491874G	5.508036G	Inf	1
18.42M	5.49082G	5.50924G	16.192M	5.491874G	5.508066G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5580MHz

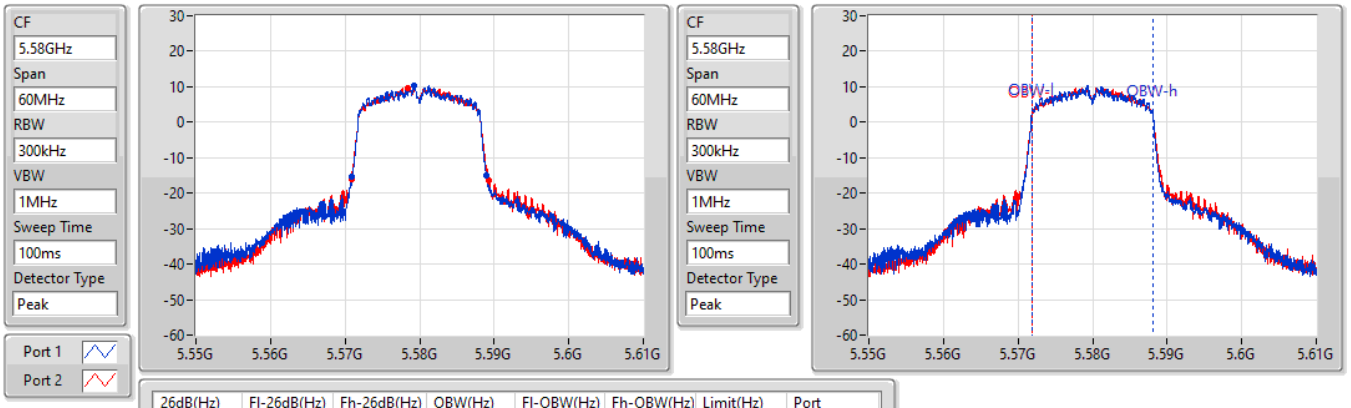

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.09M	5.57088G	5.58897G	16.192M	5.571874G	5.588066G	Inf	1
18.48M	5.57085G	5.58933G	16.192M	5.571874G	5.588066G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW


5700MHz

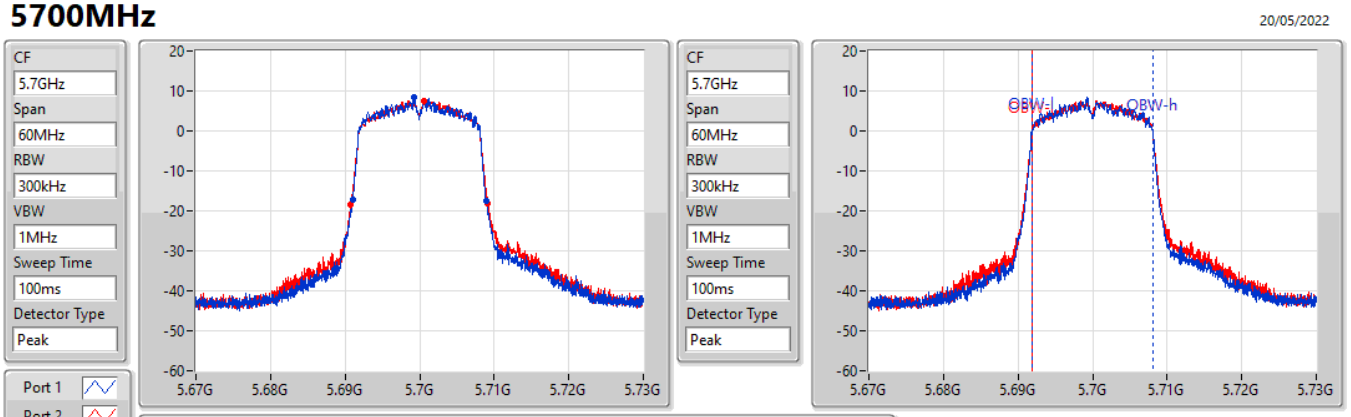

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
17.94M	5.691G	5.70894G	16.162M	5.691874G	5.708036G	Inf	1
18.39M	5.69079G	5.70918G	16.162M	5.691874G	5.708036G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW

5720MHz Straddle 5.47-5.725GHz

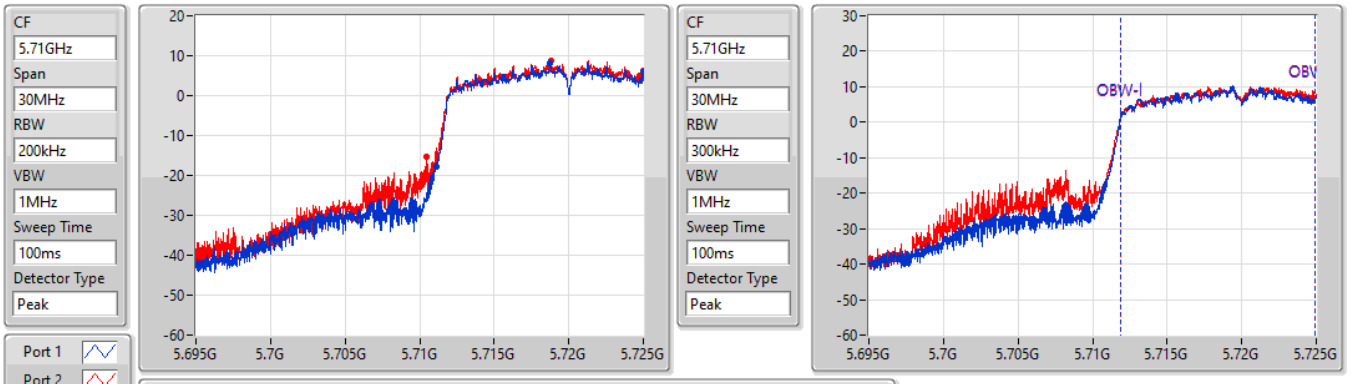


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
13.875M	5.711125G	5.725G	13.028M	5.711904G	5.724933G	Inf	1
14.535M	5.710465G	5.725G	13.043M	5.711889G	5.724933G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

02/06/2022

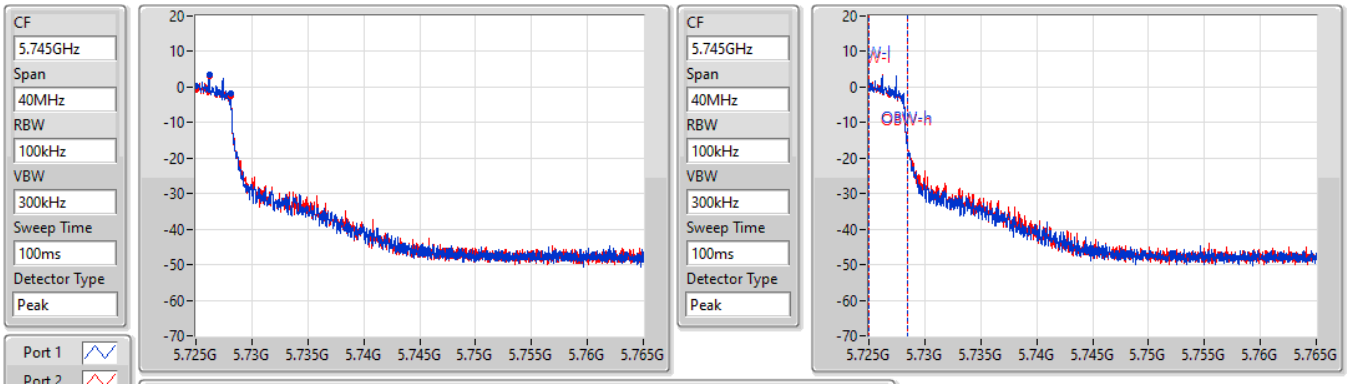


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.08M	5.725G	5.72808G	3.398M	5.72501G	5.728408G	500k	1
3.08M	5.725G	5.72808G	3.478M	5.72501G	5.728488G	500k	2

802.11a_Nss1,(6Mbps)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

02/06/2022

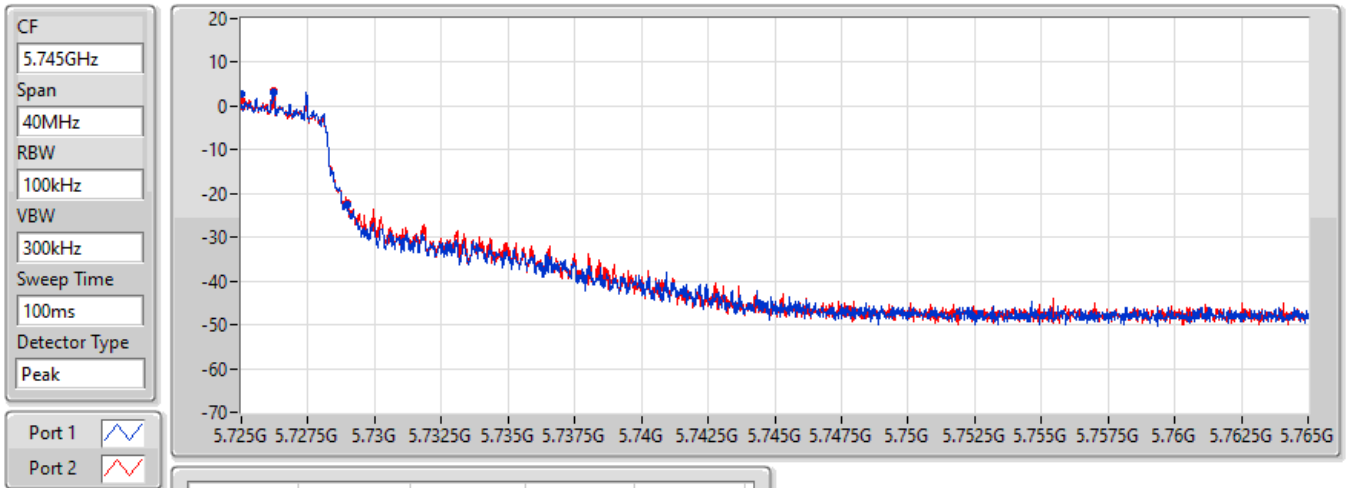


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
3.96M	5.725G	5.72896G	Inf	1
3.98M	5.725G	5.72898G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW

5745MHz

02/06/2022

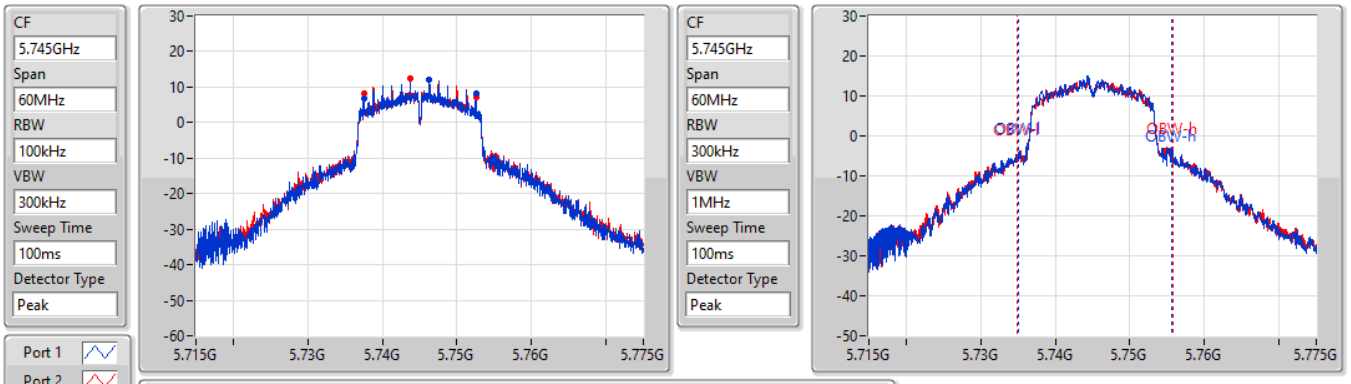


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.03M	5.7375G	5.75253G	20.45M	5.735105G	5.755555G	500k	1
15.06M	5.73753G	5.75259G	20.96M	5.734835G	5.755795G	500k	2

802.11a_Nss1,(6Mbps)_2TX EBW

5745MHz

02/06/2022

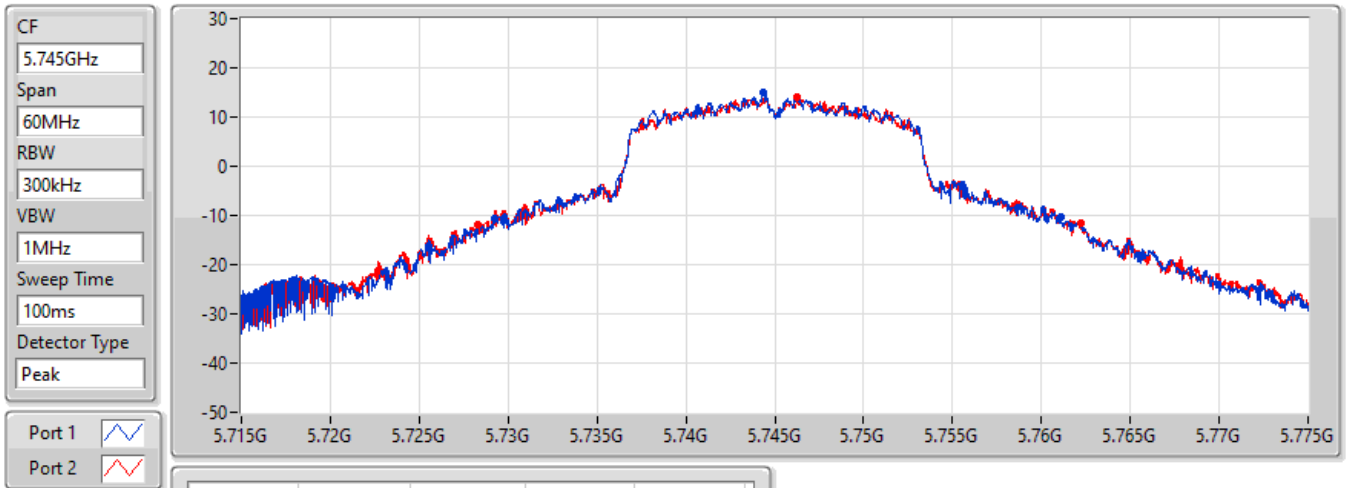


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
31.8M	5.72928G	5.76108G	Inf	1
33.9M	5.72832G	5.76222G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW

5785MHz

02/06/2022

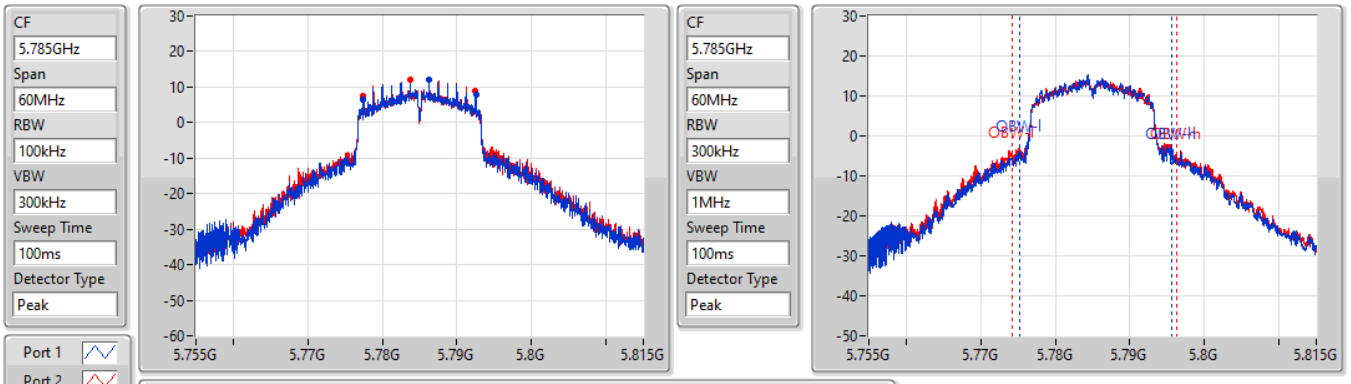


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.09M	5.77744G	5.79253G	20.45M	5.775165G	5.795615G	500k	1
15.03M	5.77747G	5.7925G	22.069M	5.774295G	5.796364G	500k	2

802.11a_Nss1,(6Mbps)_2TX EBW

5785MHz

02/06/2022

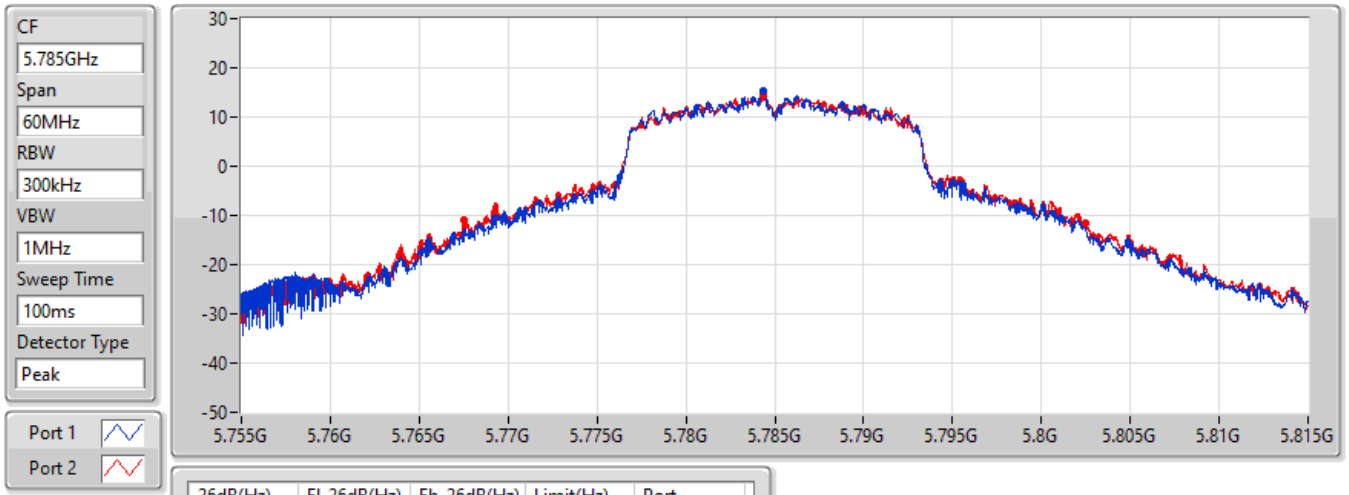


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
31.83M	5.76925G	5.80108G	Inf	1
34.92M	5.76754G	5.80246G	Inf	2

802.11a_Nss1,(6Mbps)_2TX EBW

5825MHz

02/06/2022

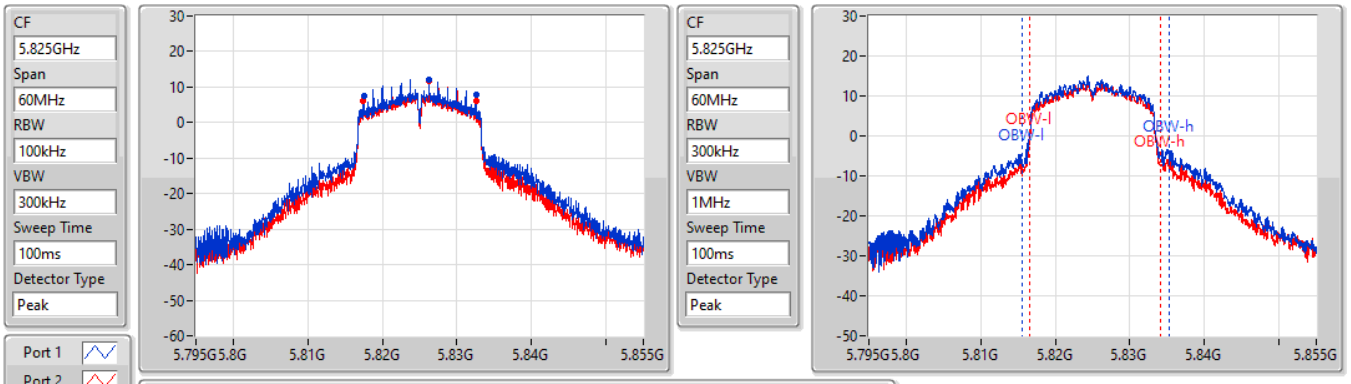


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.03M	5.8175G	5.83253G	19.79M	5.815525G	5.835315G	500k	1
15.09M	5.81747G	5.83256G	17.631M	5.816514G	5.834145G	500k	2

802.11a_Nss1,(6Mbps)_2TX EBW

5825MHz


02/06/2022

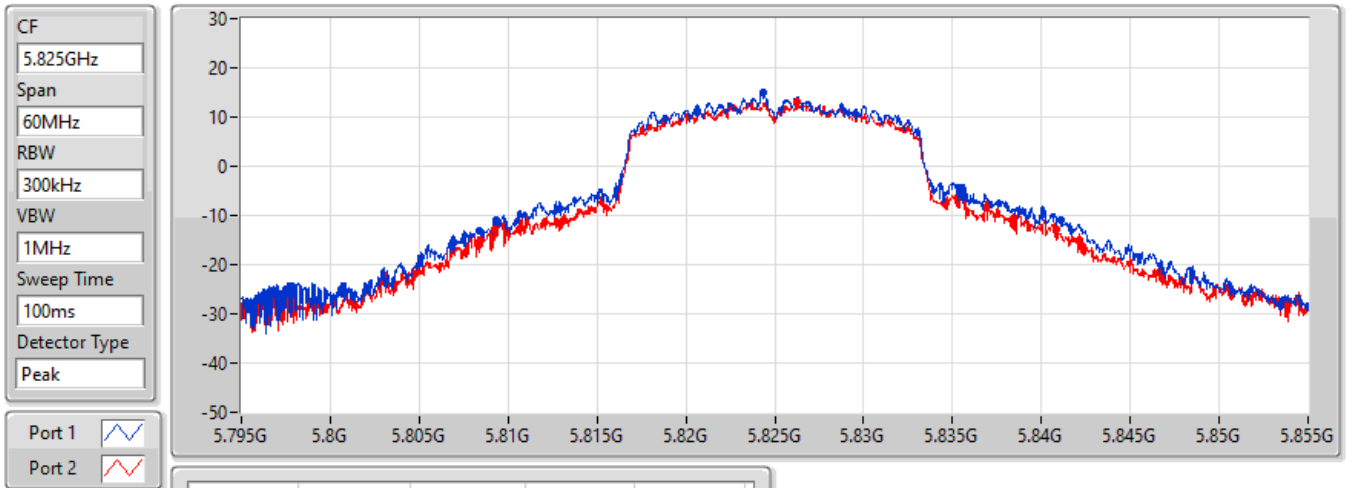

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
31.74M	5.80934G	5.84108G	Inf	1
31.59M	5.80925G	5.84084G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5180MHz

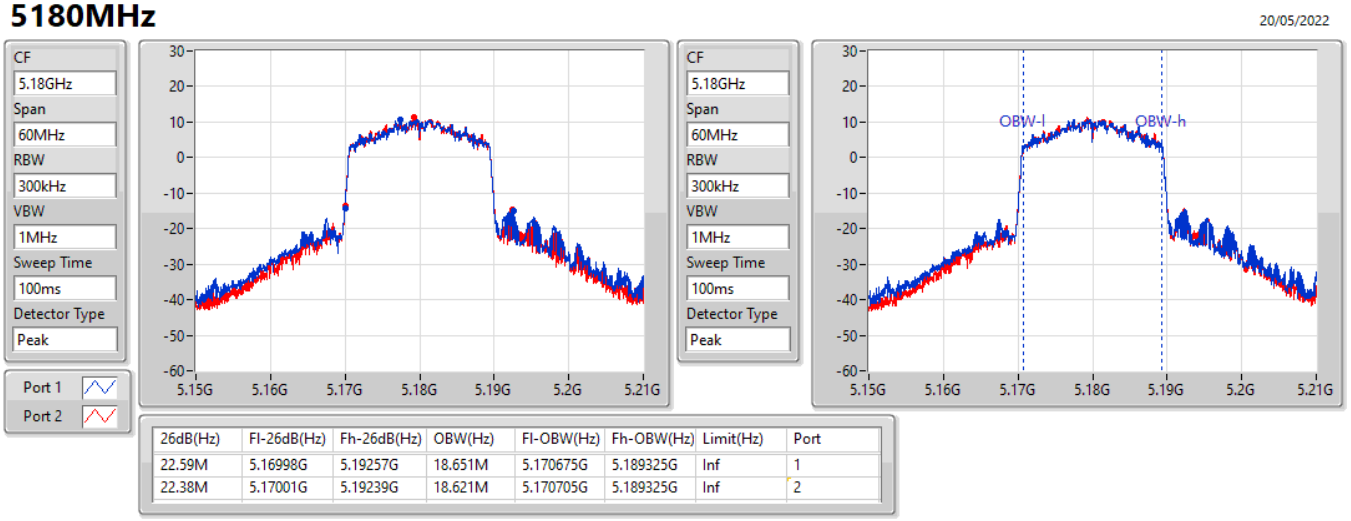

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.59M	5.16998G	5.19257G	18.651M	5.170675G	5.189325G	Inf	1
22.38M	5.17001G	5.19239G	18.621M	5.170705G	5.189325G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5200MHz

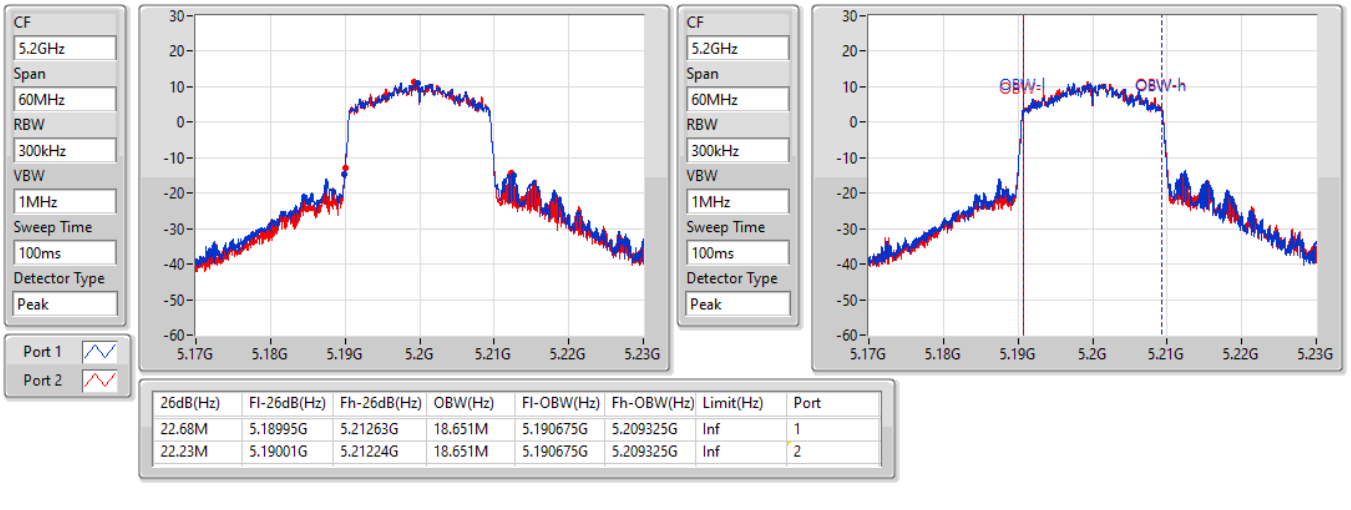

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.68M	5.18995G	5.21263G	18.651M	5.190675G	5.209325G	Inf	1
22.23M	5.19001G	5.21224G	18.651M	5.190675G	5.209325G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5240MHz

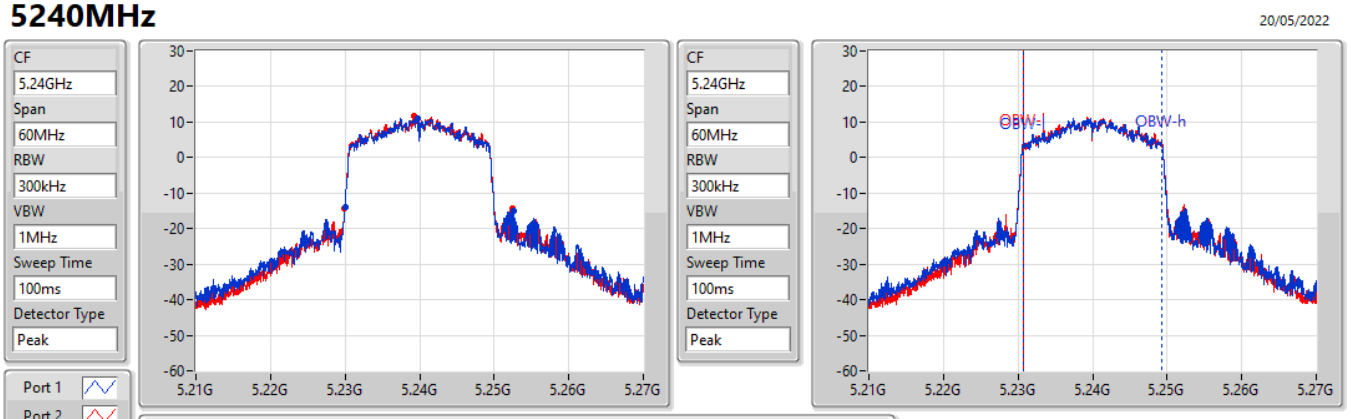

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.56M	5.22998G	5.25254G	18.651M	5.230675G	5.249325G	Inf	1
22.44M	5.22995G	5.25239G	18.651M	5.230675G	5.249325G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5260MHz

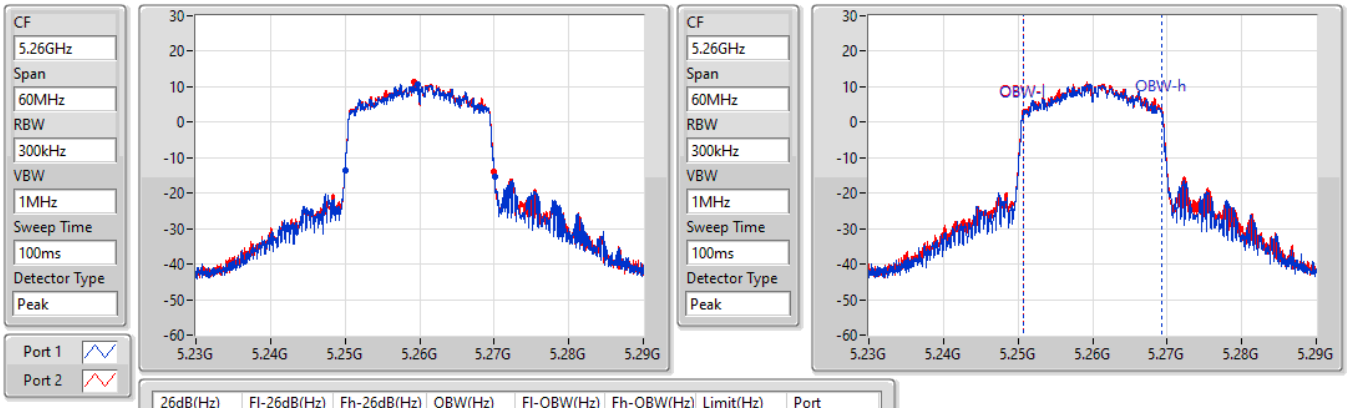


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.07M	5.24998G	5.27005G	18.591M	5.250705G	5.269295G	Inf	1
20.04M	5.24998G	5.27002G	18.621M	5.250675G	5.269295G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5300MHz

20/05/2022

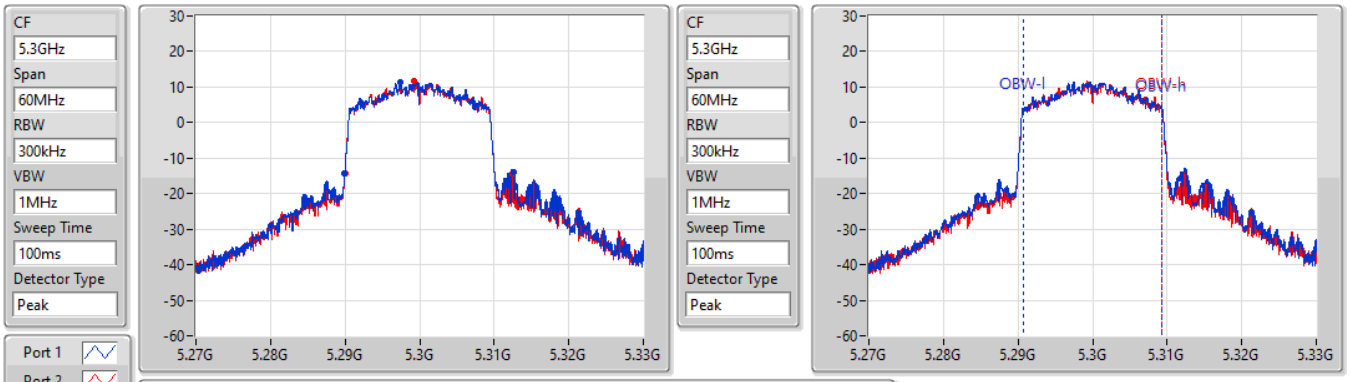


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.65M	5.28995G	5.3126G	18.651M	5.290675G	5.309325G	Inf	1
22.41M	5.28998G	5.31239G	18.651M	5.290675G	5.309325G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5320MHz

20/05/2022

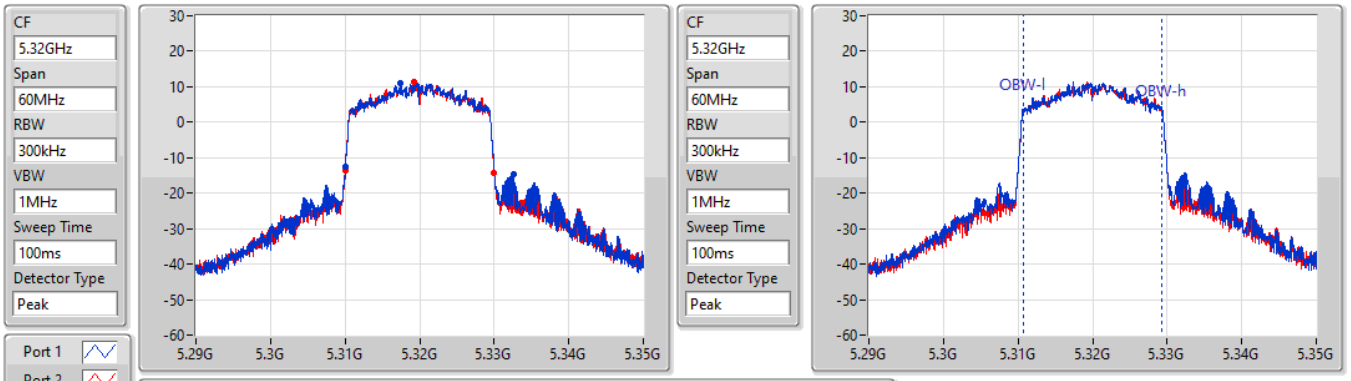


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
22.53M	5.31001G	5.33254G	18.621M	5.310705G	5.329325G	Inf	1
20.01M	5.31001G	5.33002G	18.651M	5.310675G	5.329325G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5500MHz

20/05/2022

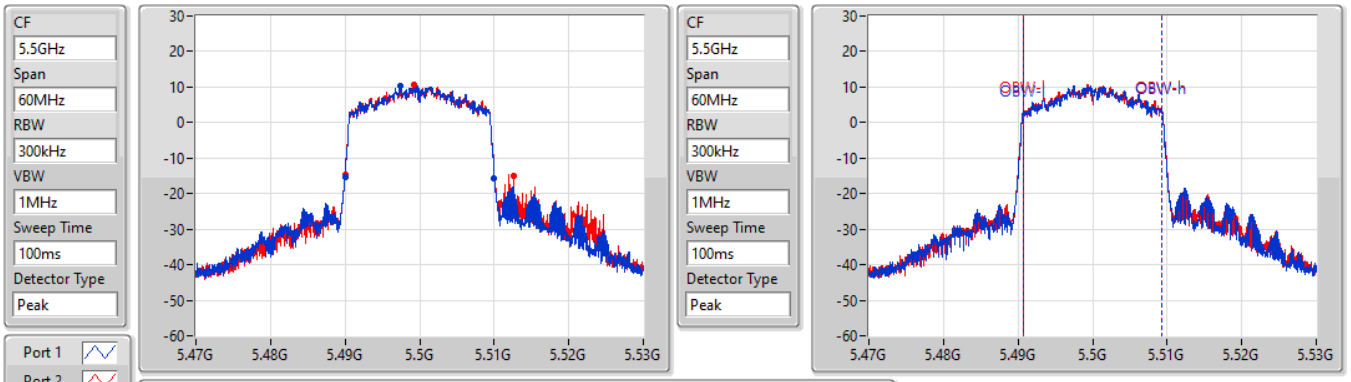


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.04M	5.48998G	5.51002G	18.621M	5.490705G	5.509325G	Inf	1
22.62M	5.48998G	5.5126G	18.621M	5.490705G	5.509325G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5580MHz


20/05/2022

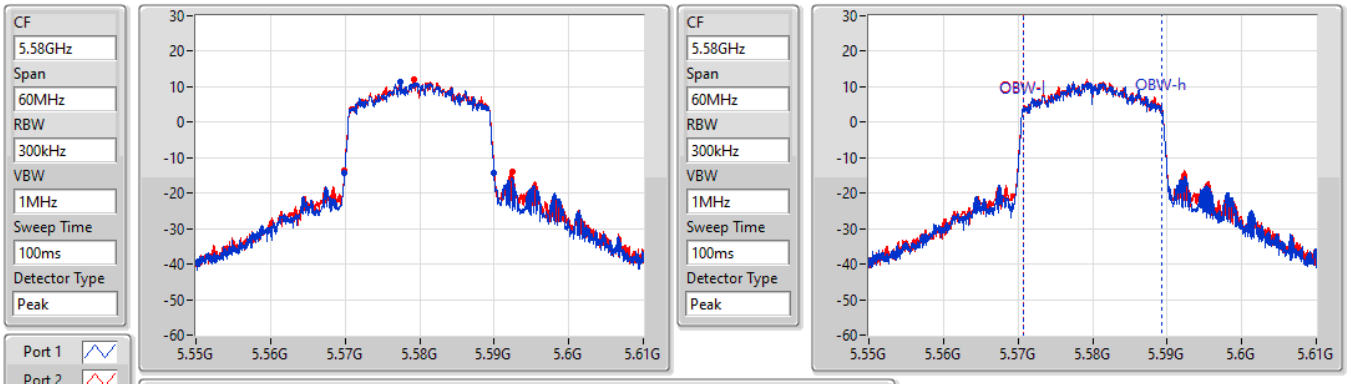

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.04M	5.56995G	5.58999G	18.651M	5.570645G	5.589295G	Inf	1
22.47M	5.56995G	5.59242G	18.651M	5.570645G	5.589295G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5700MHz

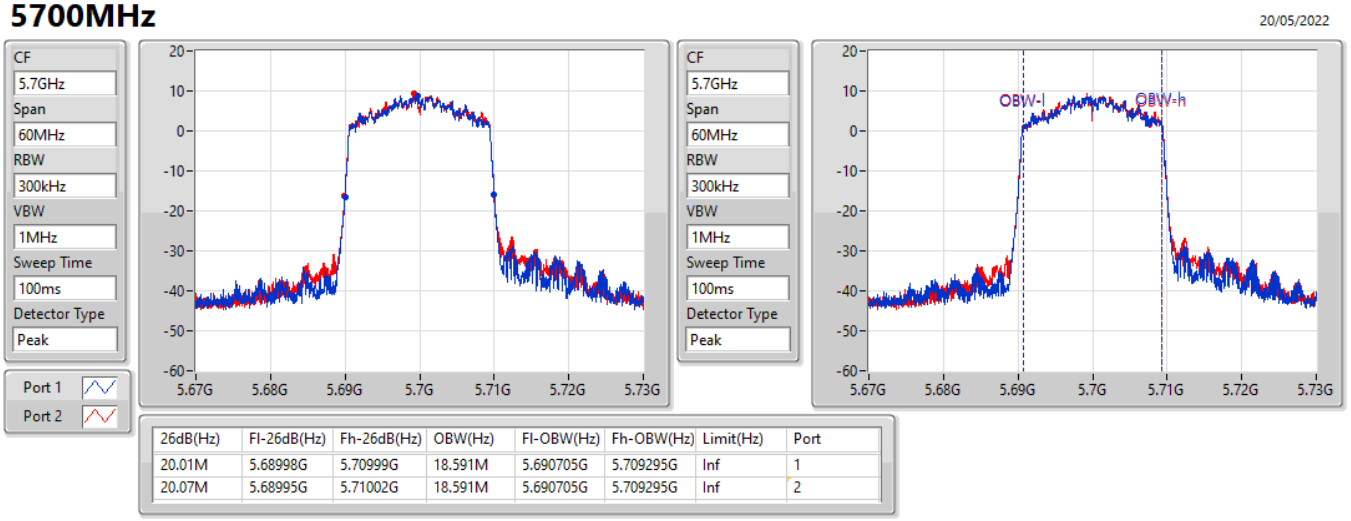

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.01M	5.68998G	5.70999G	18.591M	5.690705G	5.709295G	Inf	1
20.07M	5.68995G	5.71002G	18.591M	5.690705G	5.709295G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5720MHz Straddle 5.47-5.725GHz

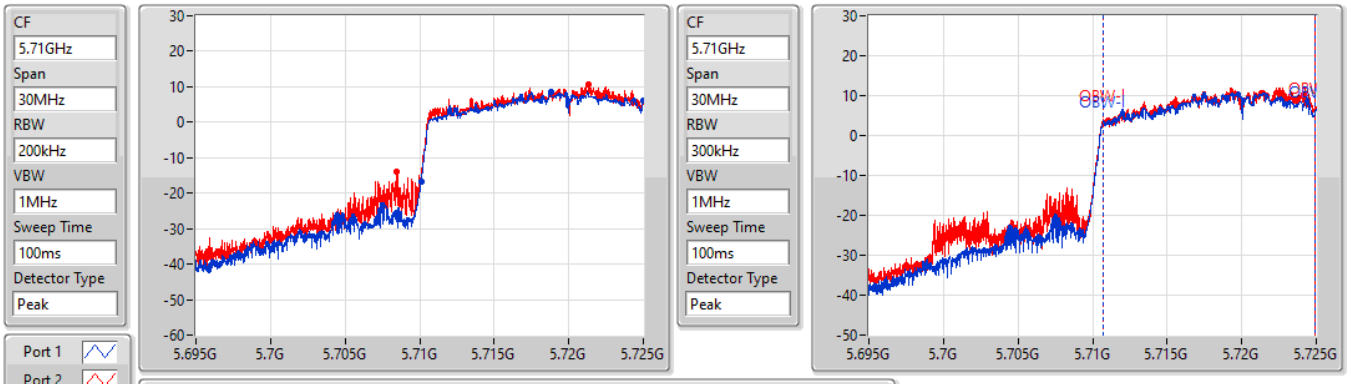

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.88M	5.71012G	5.725G	14.198M	5.71069G	5.724888G	Inf	1
16.53M	5.70847G	5.725G	14.213M	5.710675G	5.724888G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5720MHz Straddle 5.725-5.85GHz

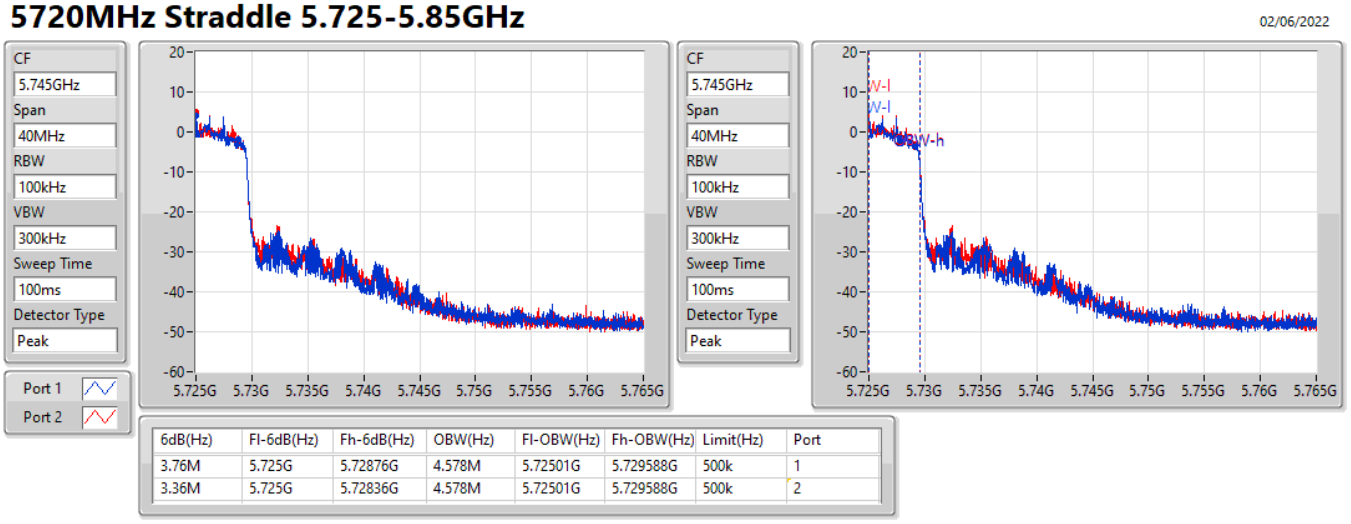

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.76M	5.725G	5.72876G	4.578M	5.72501G	5.729588G	500k	1
3.36M	5.725G	5.72836G	4.578M	5.72501G	5.729588G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

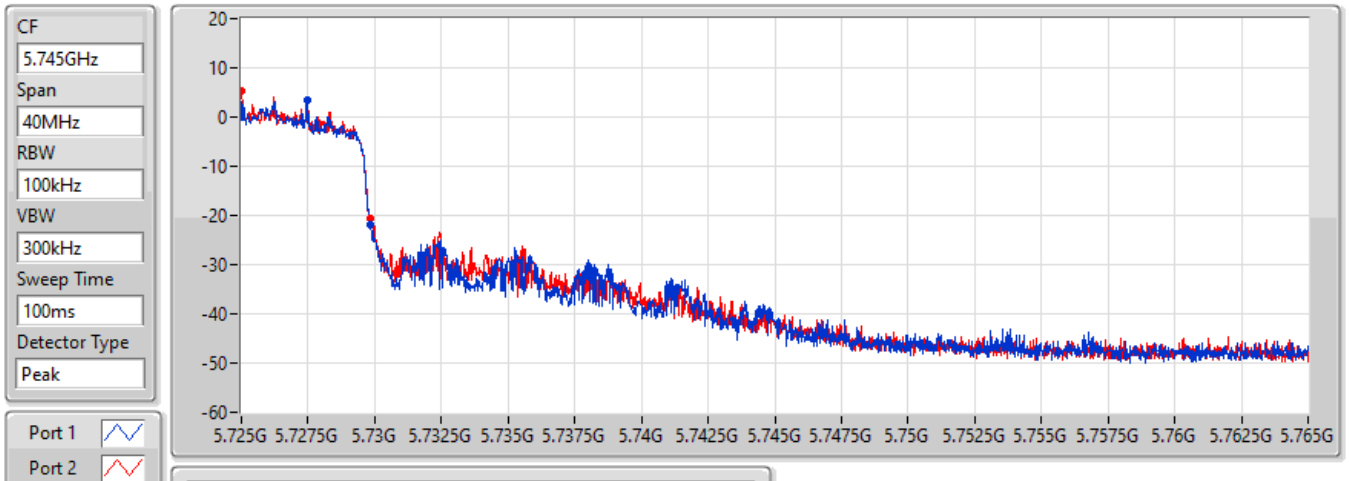


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
4.86M	5.725G	5.72986G	Inf	1
4.82M	5.725G	5.72982G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

02/06/2022

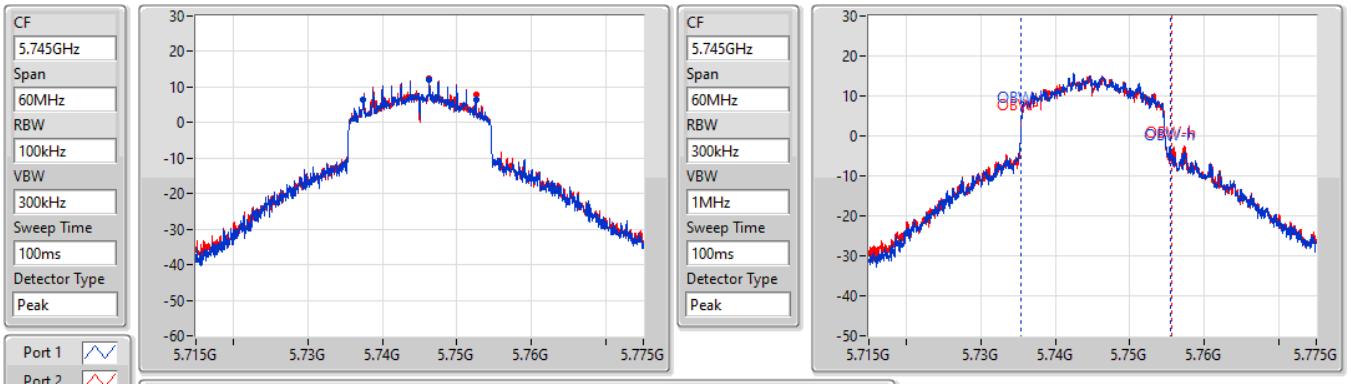


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.09M	5.73747G	5.75256G	19.91M	5.735465G	5.755375G	500k	1
15.09M	5.73747G	5.75256G	20.24M	5.735405G	5.755645G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

02/06/2022

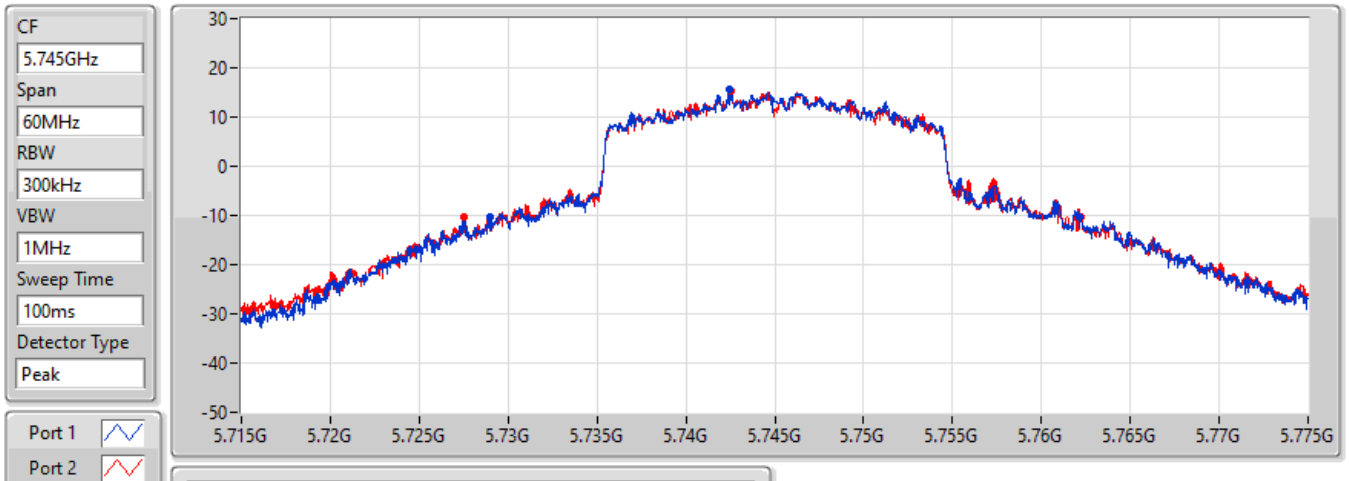


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
33.21M	5.72895G	5.76216G	Inf	1
34.71M	5.72751G	5.76222G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz

02/06/2022

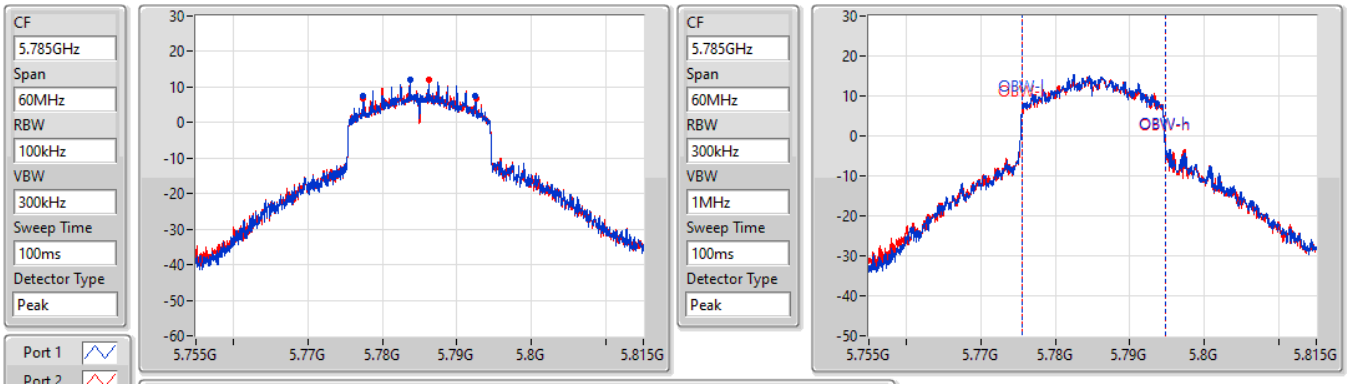


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.03M	5.77747G	5.7925G	19.34M	5.775495G	5.794835G	500k	1
15.09M	5.77744G	5.79253G	19.31M	5.775495G	5.794805G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz


02/06/2022

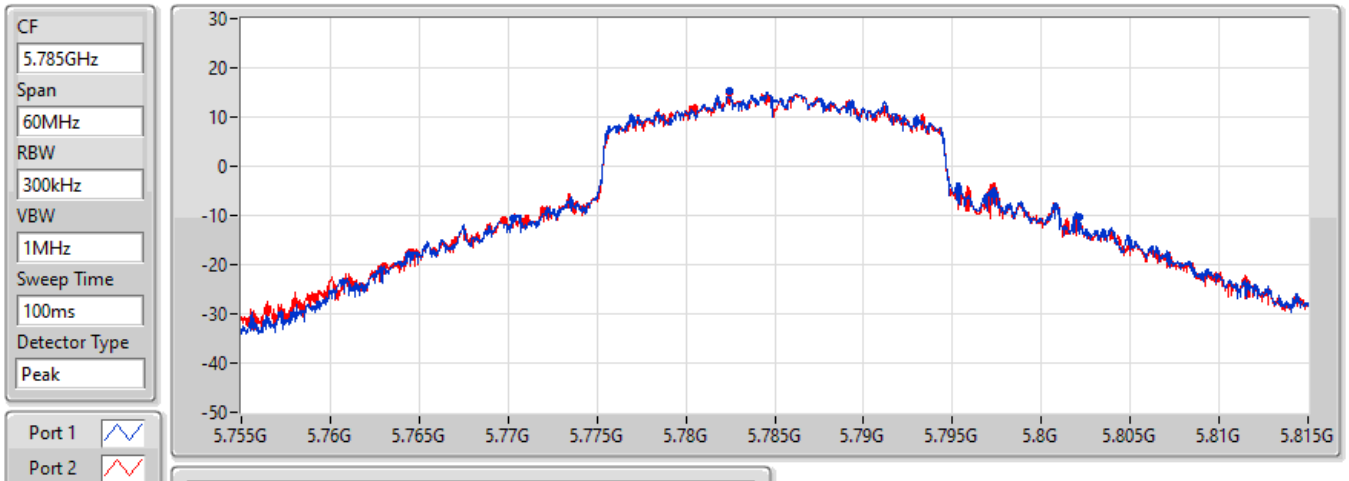

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
31.8M	5.7703G	5.8021G	Inf	1
32.34M	5.76979G	5.80213G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5825MHz

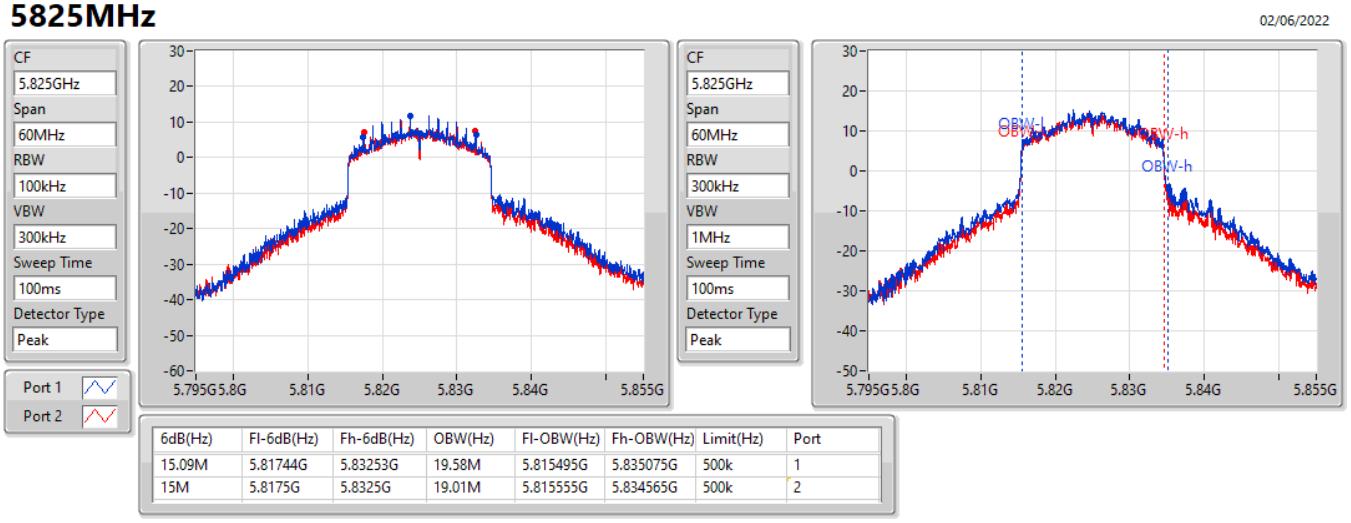

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.09M	5.81744G	5.83253G	19.58M	5.815495G	5.835075G	500k	1
15M	5.8175G	5.8325G	19.01M	5.8155555G	5.834565G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5825MHz

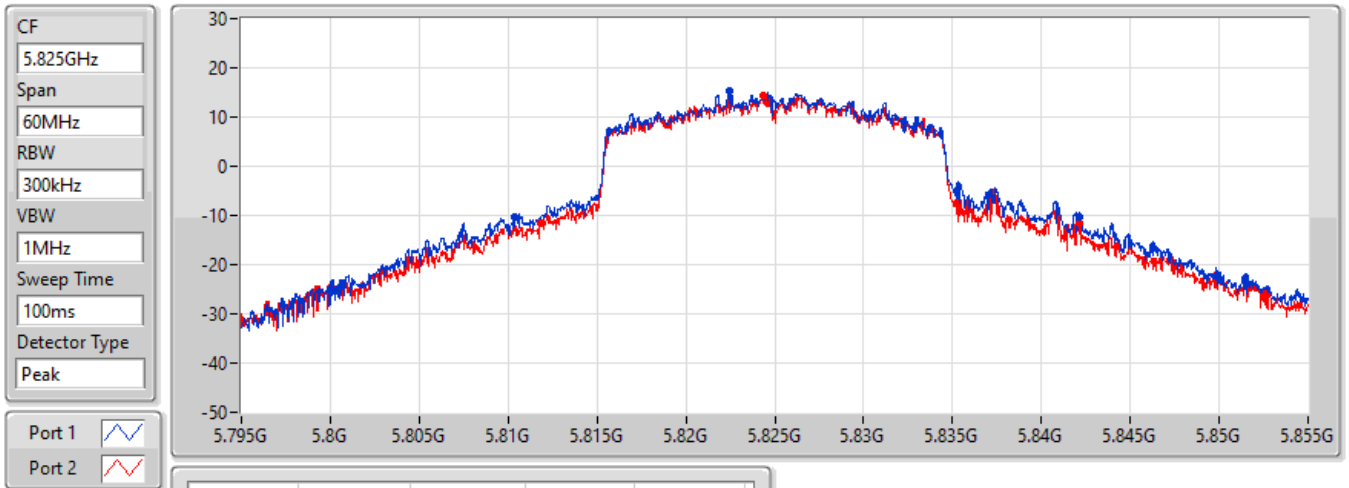

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
31.77M	5.81039G	5.84216G	Inf	1
30.36M	5.8118G	5.84216G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW


5190MHz

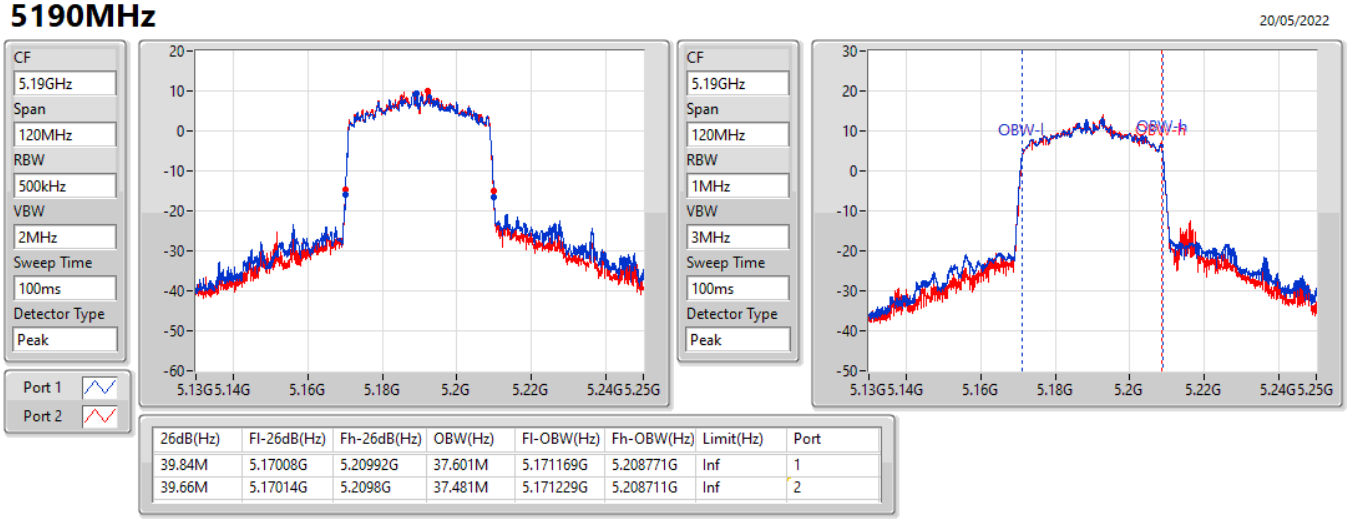

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.84M	5.17008G	5.20992G	37.601M	5.171169G	5.208771G	Inf	1
39.66M	5.17014G	5.2098G	37.481M	5.171229G	5.208711G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW


5230MHz

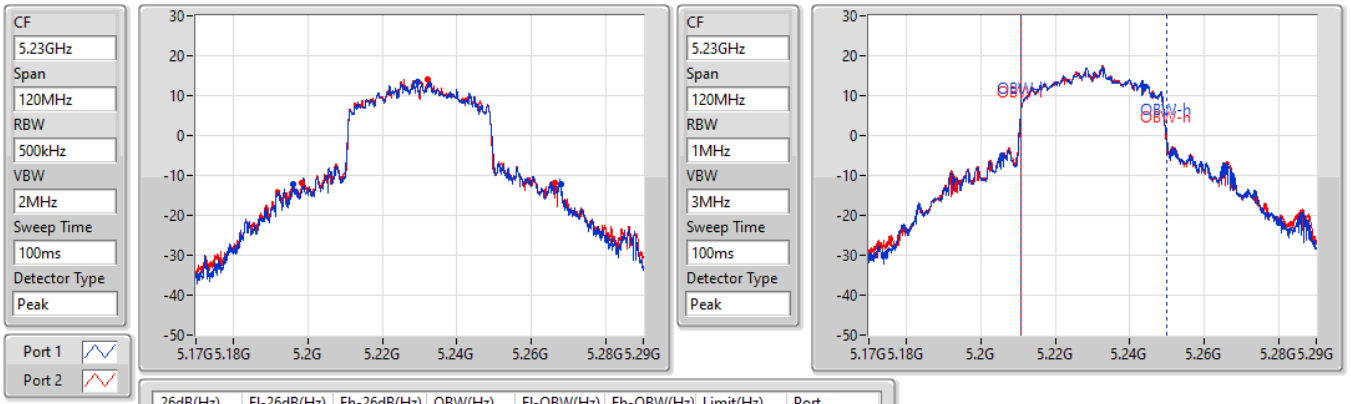

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
71.7M	5.1961G	5.2678G	39.04M	5.21075G	5.24979G	Inf	1
67.86M	5.19844G	5.2663G	39.1M	5.21069G	5.24979G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW


5270MHz

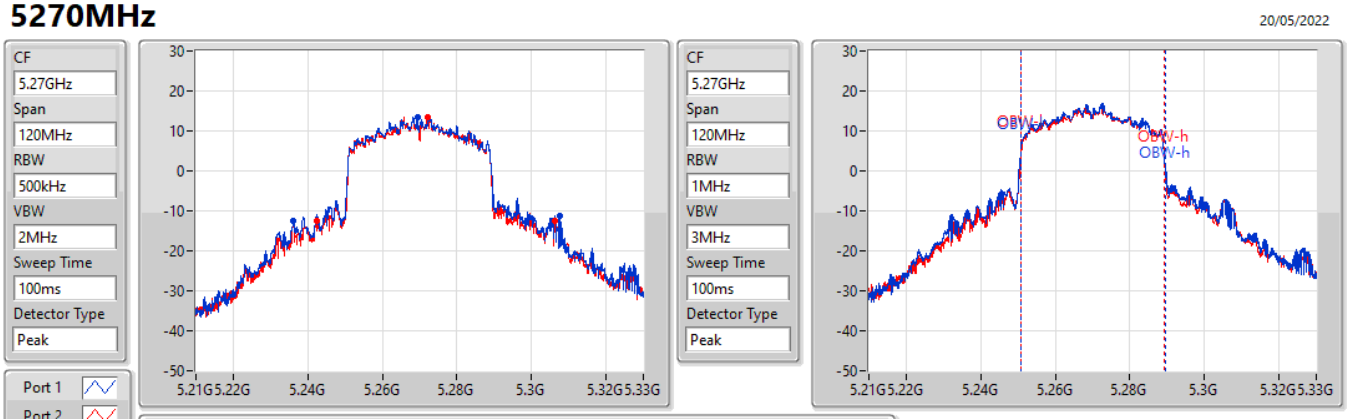

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
71.64M	5.23604G	5.30768G	38.861M	5.25081G	5.28967G	Inf	1
64.02M	5.24228G	5.3063G	38.381M	5.25093G	5.28931G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW


5310MHz

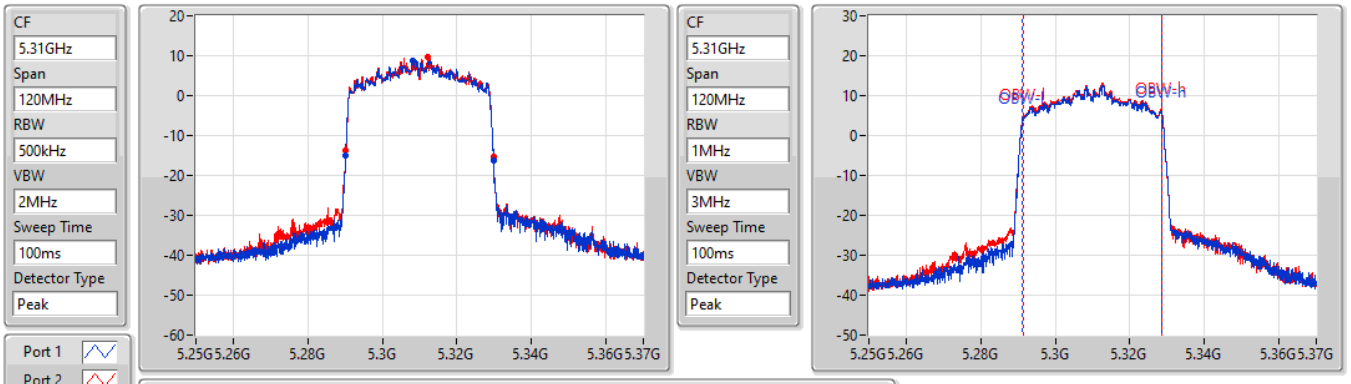

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.72M	5.29014G	5.32986G	37.481M	5.291229G	5.328711G	Inf	1
39.6M	5.2902G	5.3298G	37.361M	5.291289G	5.328651G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW


5510MHz

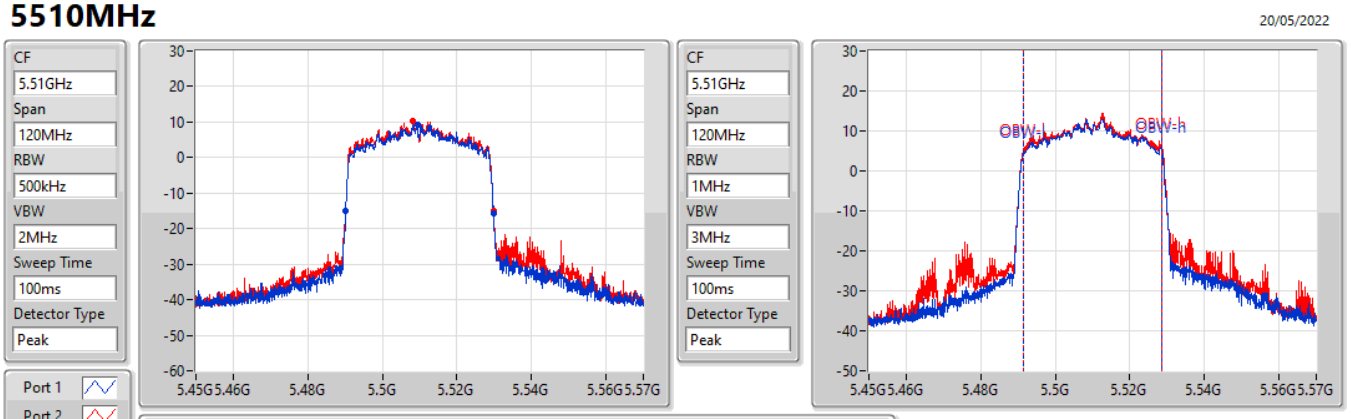

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.72M	5.49014G	5.52986G	37.361M	5.491289G	5.528651G	Inf	1
39.66M	5.49014G	5.5298G	37.361M	5.491289G	5.528651G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5550MHz

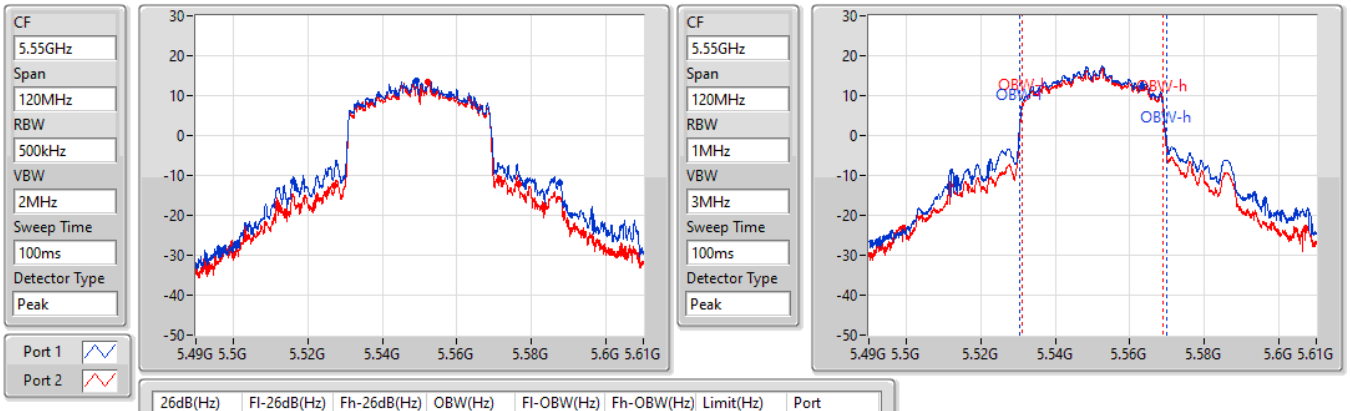


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
71.76M	5.51598G	5.58774G	39.4M	5.53057G	5.56997G	Inf	1
49.38M	5.5272G	5.57658G	38.021M	5.53099G	5.56901G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5670MHz

20/05/2022

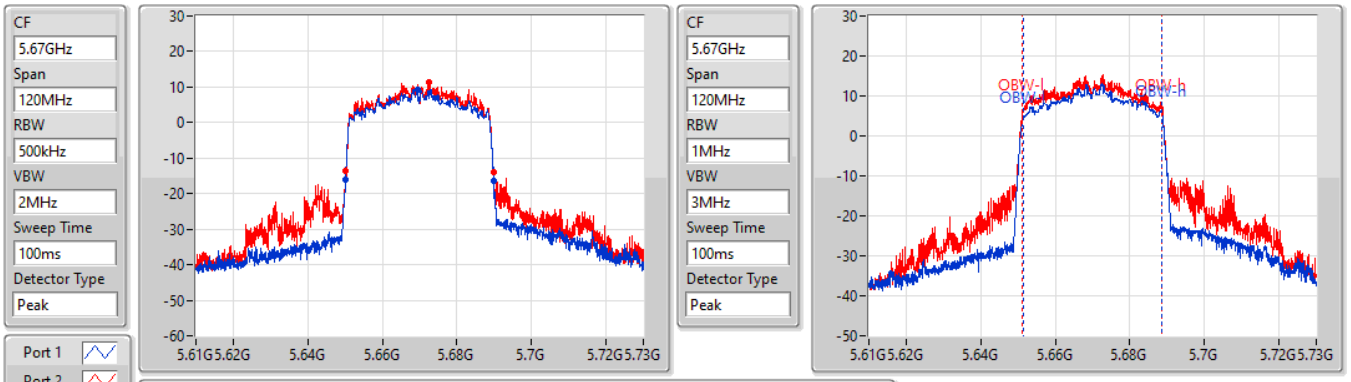


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
39.78M	5.65014G	5.68992G	37.421M	5.651289G	5.688711G	Inf	1
39.66M	5.6502G	5.68986G	37.481M	5.651229G	5.688711G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5710MHz Straddle 5.47-5.725GHz

20/05/2022

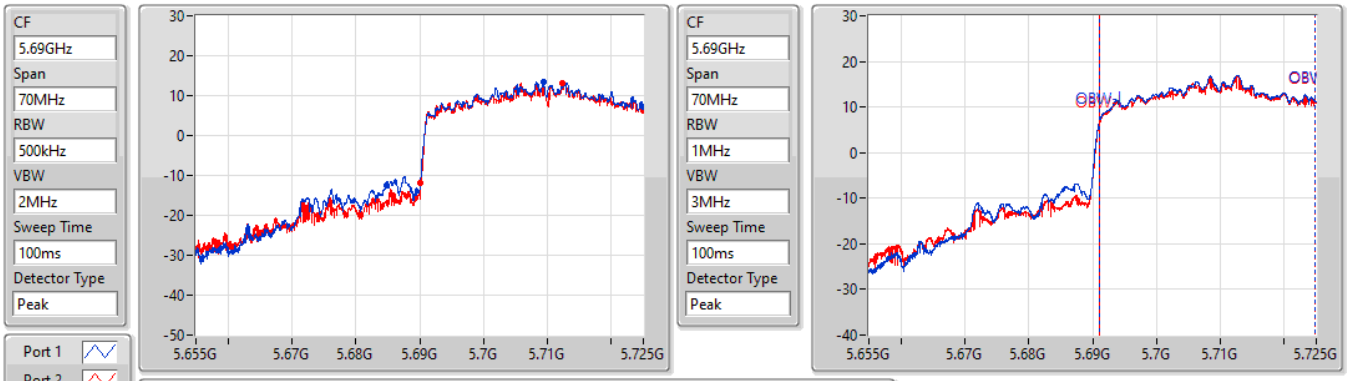


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
40.25M	5.68475G	5.725G	33.758M	5.69098G	5.724738G	Inf	1
34.86M	5.69014G	5.725G	33.688M	5.691049G	5.724738G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5710MHz Straddle 5.725-5.85GHz

02/06/2022

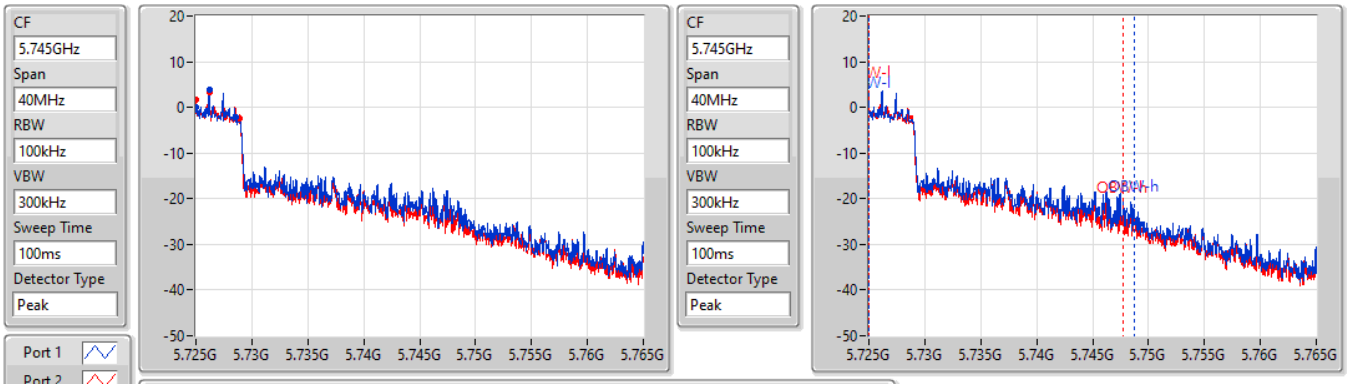


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.58M	5.725G	5.72858G	23.708M	5.72501G	5.748718G	500k	1
3.9M	5.725G	5.7289G	22.729M	5.72501G	5.747739G	500k	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5710MHz Straddle 5.725-5.85GHz

02/06/2022

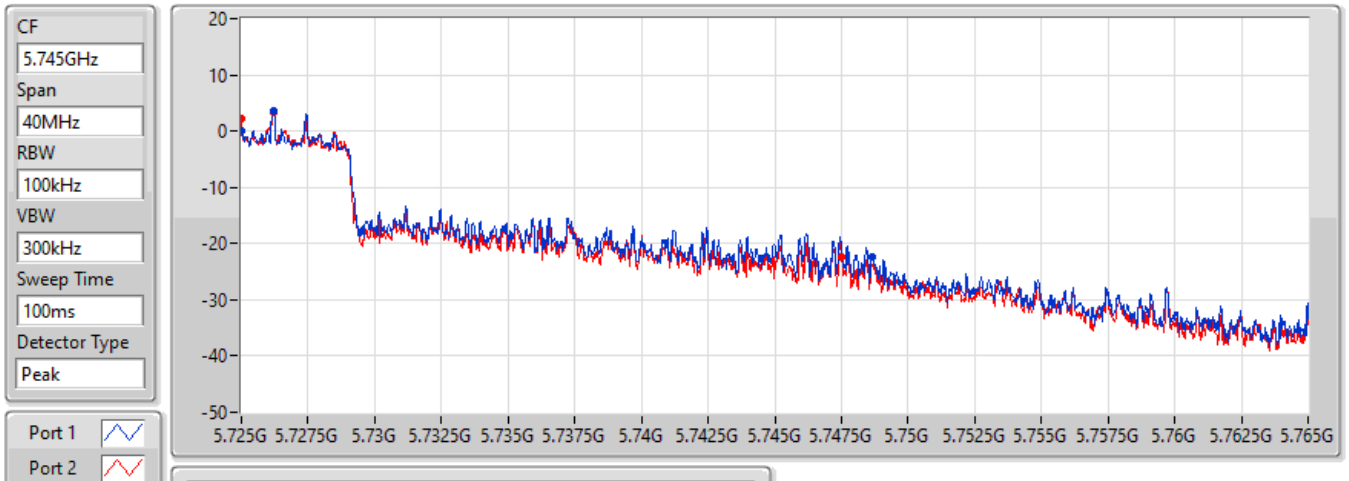


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
23.68M	5.725G	5.74868G	Inf	1
22.52M	5.725G	5.74752G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5755MHz

02/06/2022

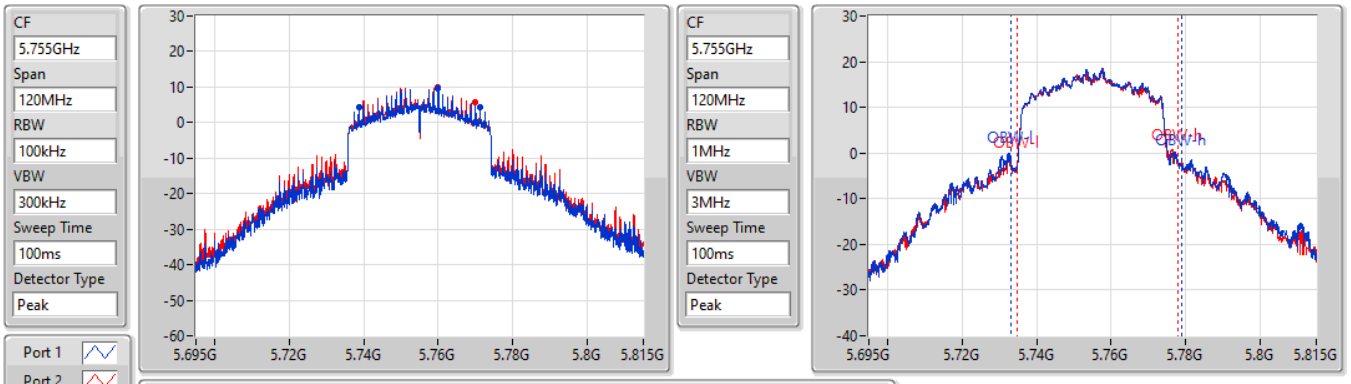


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
32.58M	5.73868G	5.77126G	45.757M	5.732991G	5.778748G	500k	1
31.32M	5.73868G	5.77G	43.178M	5.73461G	5.777789G	500k	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5755MHz

02/06/2022

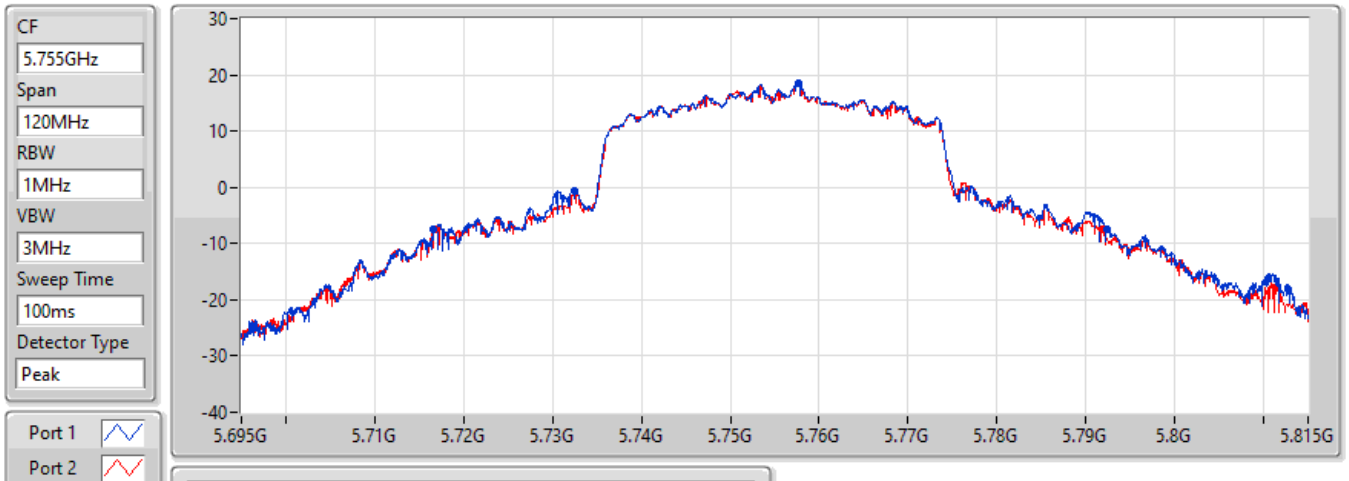


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
75.72M	5.71666G	5.79238G	Inf	1
75.12M	5.71672G	5.79184G	Inf	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5795MHz

02/06/2022

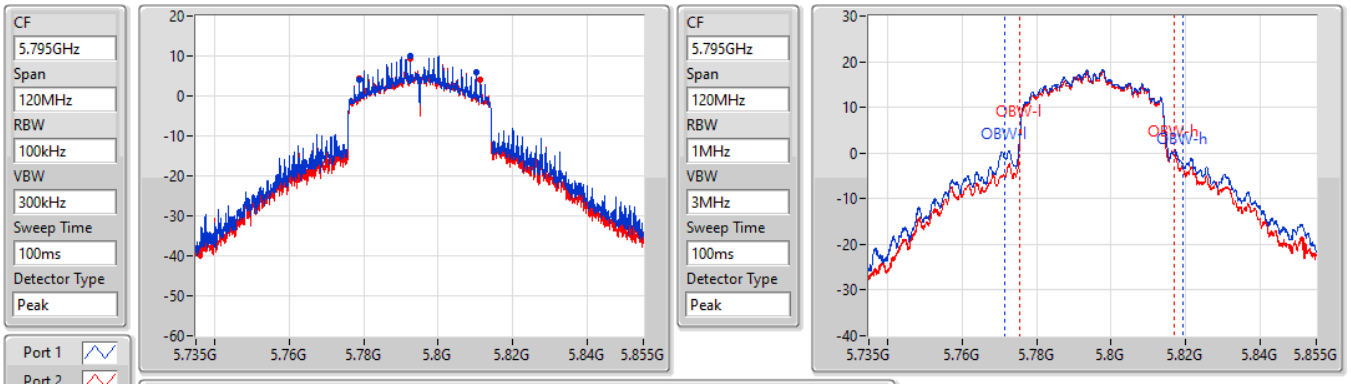


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
31.26M	5.7788G	5.81006G	47.556M	5.771552G	5.819108G	500k	1
32.58M	5.77874G	5.81132G	41.259M	5.77557G	5.816829G	500k	2

802.11ax HEW40_Nss1,(MCS0)_2TX EBW

5795MHz


02/06/2022

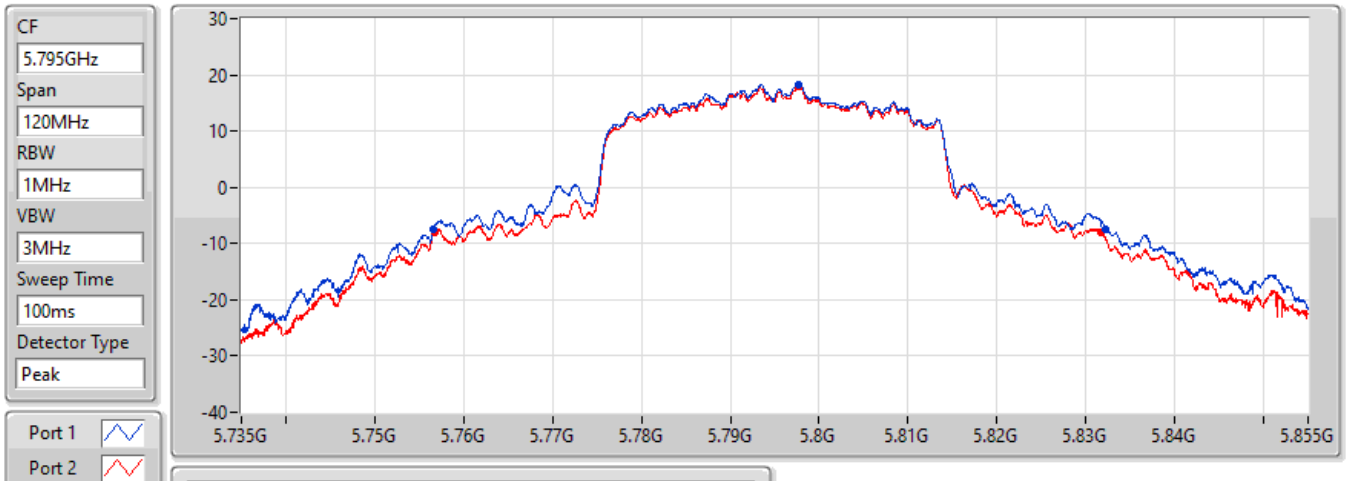

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
75.54M	5.75666G	5.8322G	Inf	1
74.94M	5.75672G	5.83166G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW


5210MHz

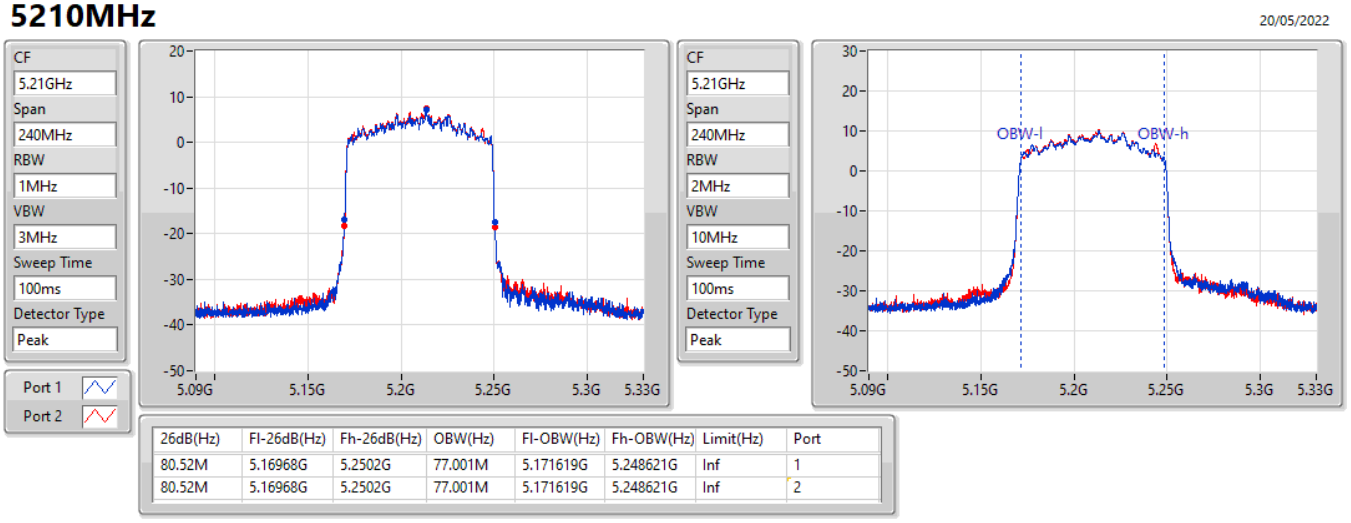

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.16968G	5.2502G	77.001M	5.171619G	5.248621G	Inf	1
80.52M	5.16968G	5.2502G	77.001M	5.171619G	5.248621G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5290MHz

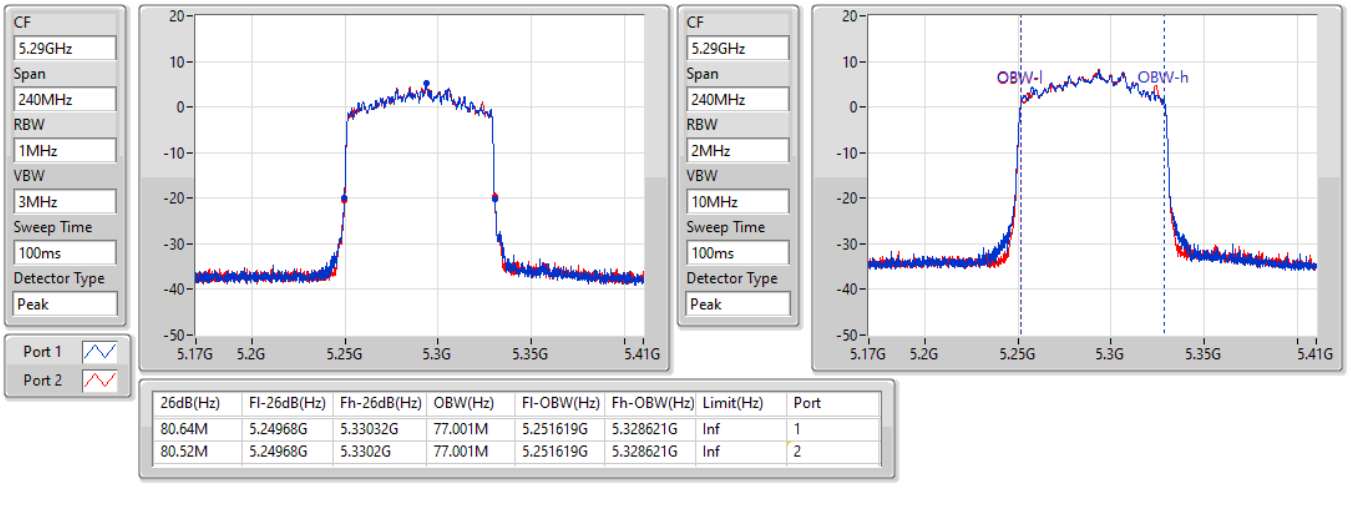


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.64M	5.24968G	5.33032G	77.001M	5.251619G	5.328621G	Inf	1
80.52M	5.24968G	5.3302G	77.001M	5.251619G	5.328621G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5530MHz

20/05/2022

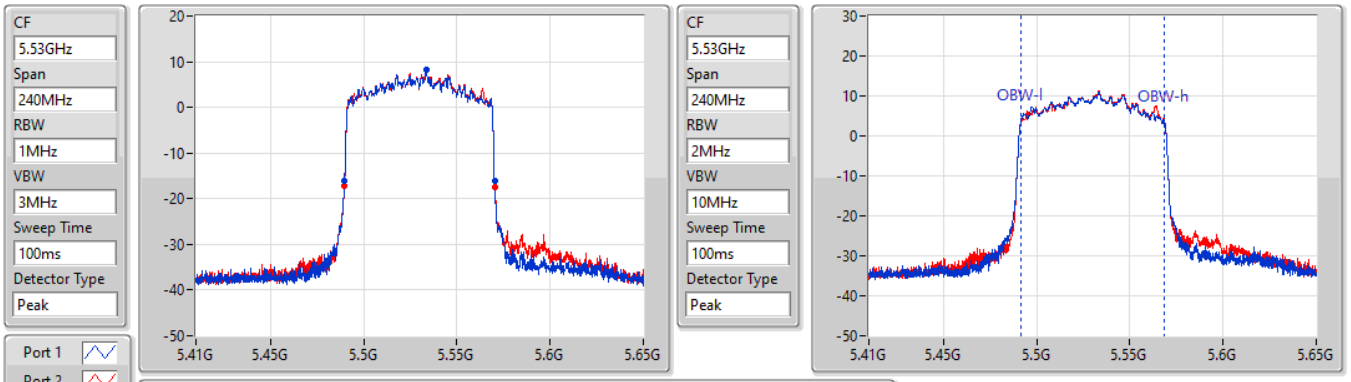


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.48968G	5.5702G	76.882M	5.491619G	5.568501G	Inf	1
80.52M	5.48968G	5.5702G	77.001M	5.491619G	5.568621G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5610MHz

20/05/2022

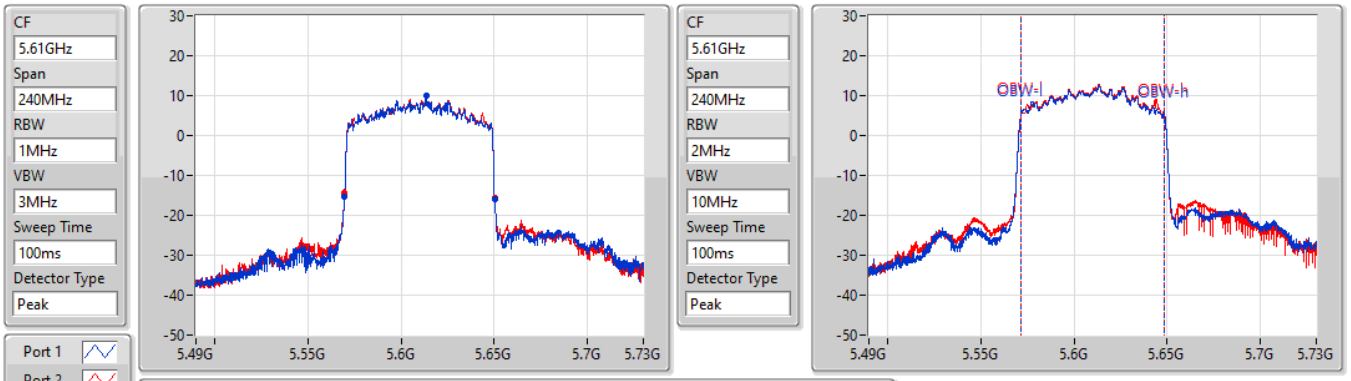


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.52M	5.56968G	5.6502G	77.001M	5.571619G	5.648621G	Inf	1
80.4M	5.5698G	5.6502G	77.001M	5.571619G	5.648621G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5690MHz Straddle 5.47-5.725GHz

20/05/2022

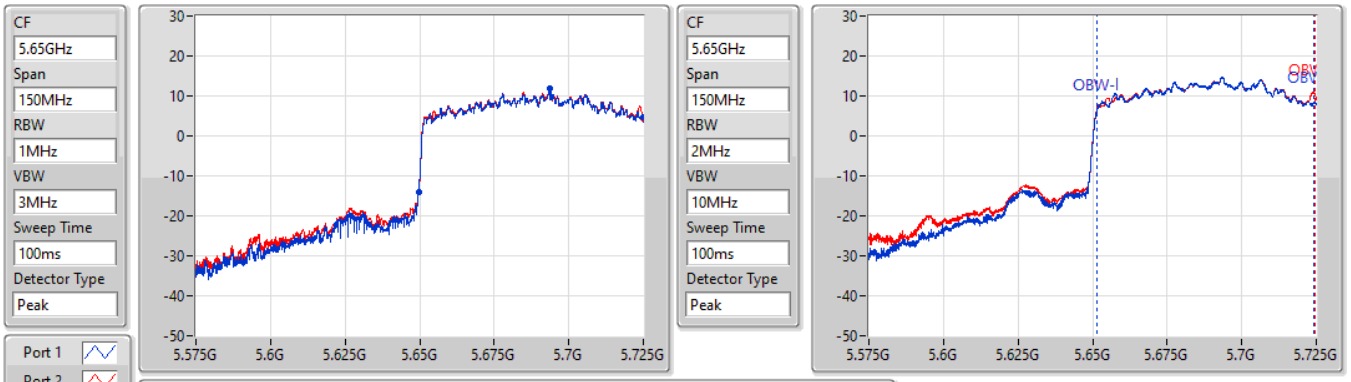


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
75.3M	5.6497G	5.725G	72.789M	5.651499G	5.724288G	Inf	1
75.3M	5.6497G	5.725G	73.013M	5.651424G	5.724438G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5690MHz Straddle 5.725-5.85GHz

02/06/2022

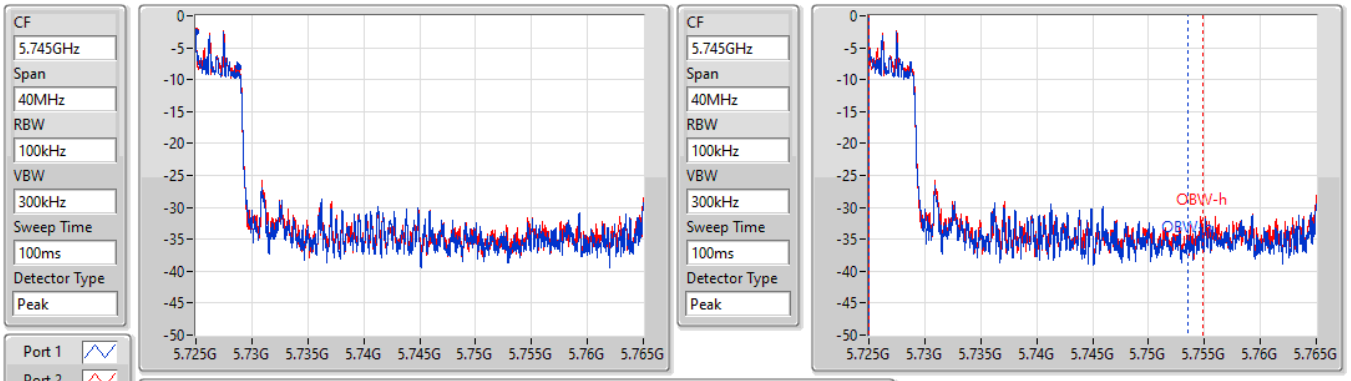


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.82M	5.725G	5.72882G	28.566M	5.72501G	5.753576G	500k	1
3.76M	5.725G	5.72876G	29.845M	5.72501G	5.754855G	500k	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5690MHz Straddle 5.725-5.85GHz

02/06/2022

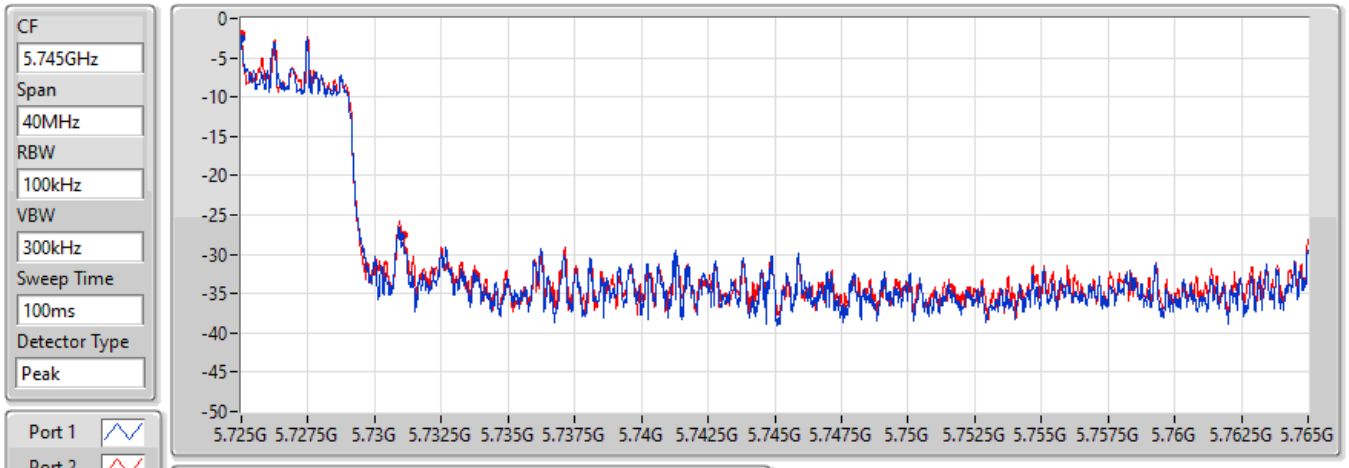


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
5.96M	5.725G	5.73096G	Inf	1
6.08M	5.725G	5.73108G	Inf	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5775MHz

02/06/2022

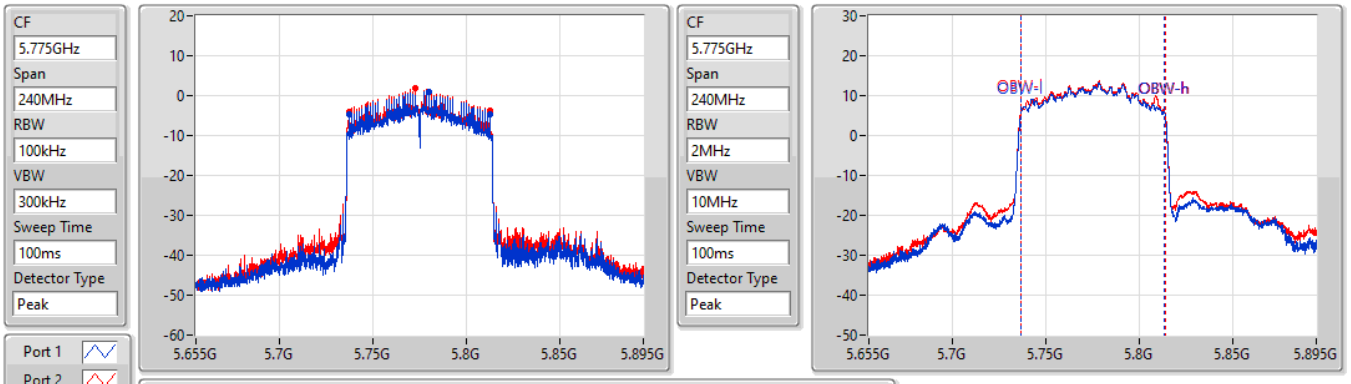


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
75.12M	5.73744G	5.81256G	77.121M	5.736619G	5.813741G	500k	1
75.12M	5.73744G	5.81256G	77.241M	5.736619G	5.813861G	500k	2

802.11ax HEW80_Nss1,(MCS0)_2TX EBW

5775MHz

02/06/2022

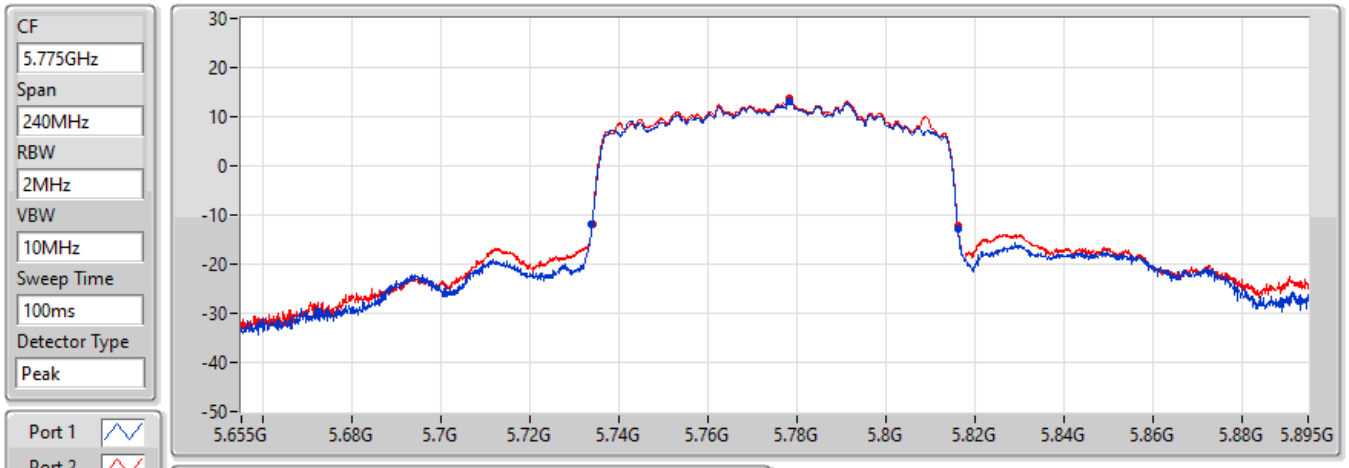


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
82.32M	5.73384G	5.81616G	Inf	1
82.2M	5.73396G	5.81616G	Inf	2

802.11ax HEW160_Nss1,(MCS0)_2TX EBW

5250MHz Straddle 5.15-5.25GHz

20/05/2022

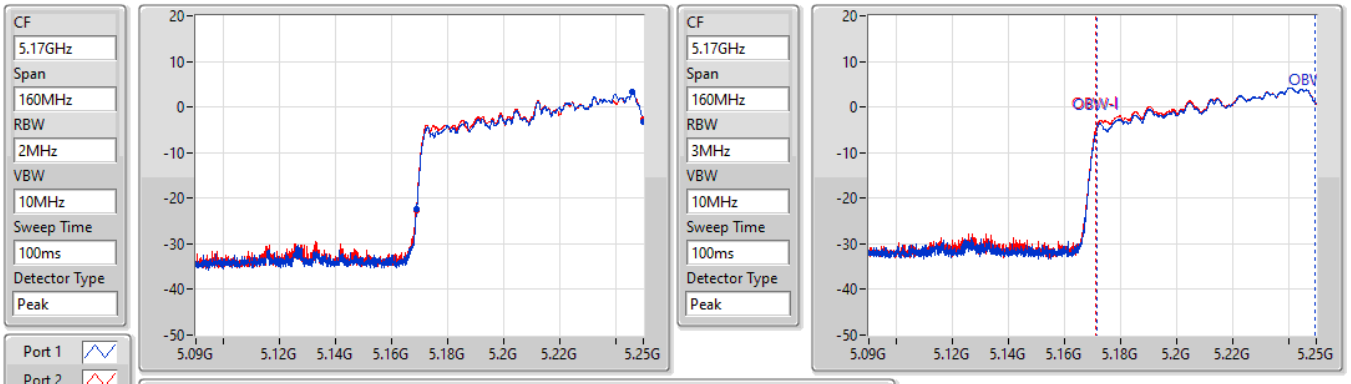


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
81.12M	5.16888G	5.25G	78.121M	5.171519G	5.24964G	Inf	1
81.28M	5.16872G	5.25G	78.281M	5.171279G	5.24956G	Inf	2

802.11ax HEW160_Nss1,(MCS0)_2TX EBW

5250MHz Straddle 5.25-5.35GHz

20/05/2022

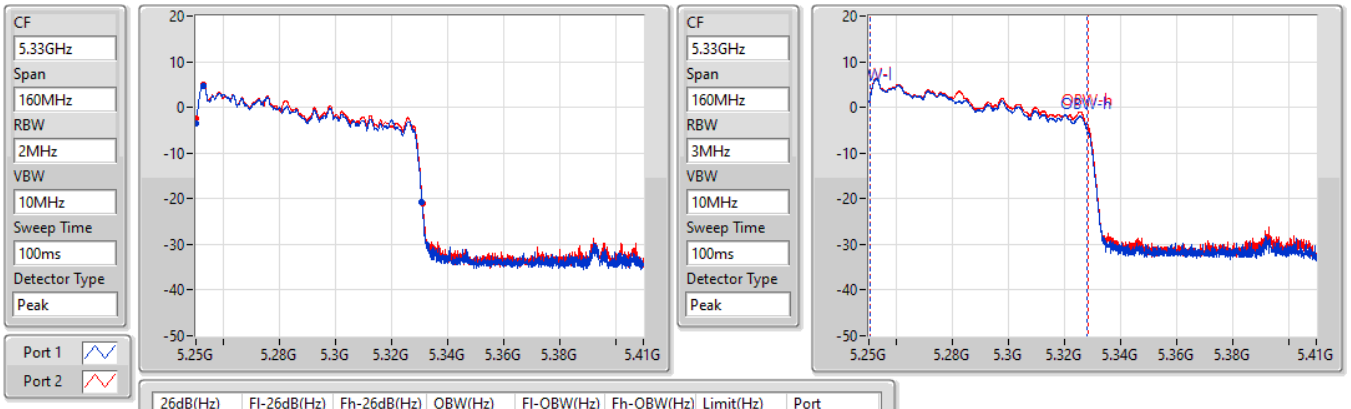


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
80.88M	5.25G	5.33088G	77.801M	5.25036G	5.328161G	Inf	1
81.04M	5.25G	5.33104G	77.881M	5.25044G	5.328321G	Inf	2

802.11ax HEW160_Nss1,(MCS0)_2TX EBW

5570MHz

20/05/2022

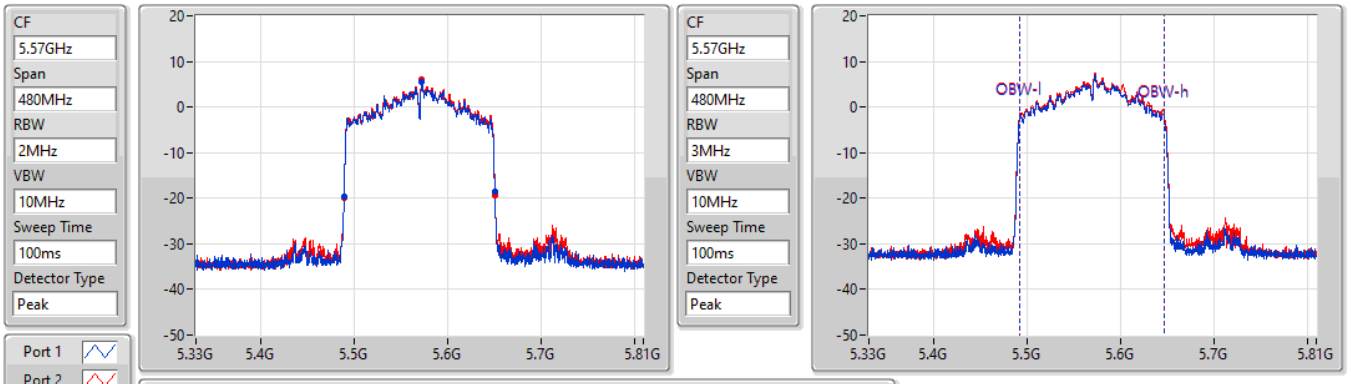

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
161.76M	5.48888G	5.65064G	154.483M	5.492279G	5.646762G	Inf	1
162M	5.48888G	5.65088G	154.723M	5.492279G	5.647001G	Inf	2

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.35M	18.081M	18M1D1D	19.17M	17.361M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.32M	17.781M	17M8D1D	19.2M	17.601M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.32M	17.751M	17M8D1D	15.24M	14.558M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	15.69M	18.021M	18M0D1D	3.06M	3.778M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	19.35M	17.571M
5200MHz	Pass	Inf	19.17M	17.361M
5240MHz	Pass	Inf	19.29M	18.081M
5260MHz	Pass	Inf	19.26M	17.601M
5300MHz	Pass	Inf	19.2M	17.781M
5320MHz	Pass	Inf	19.32M	17.751M
5500MHz	Pass	Inf	19.29M	17.751M
5580MHz	Pass	Inf	19.32M	17.691M
5700MHz	Pass	Inf	19.23M	17.301M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.24M	14.558M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.06M	3.778M
5745MHz	Pass	500k	14.43M	18.021M
5785MHz	Pass	500k	14.49M	17.811M
5825MHz	Pass	500k	15.69M	17.961M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5180MHz

21/05/2022

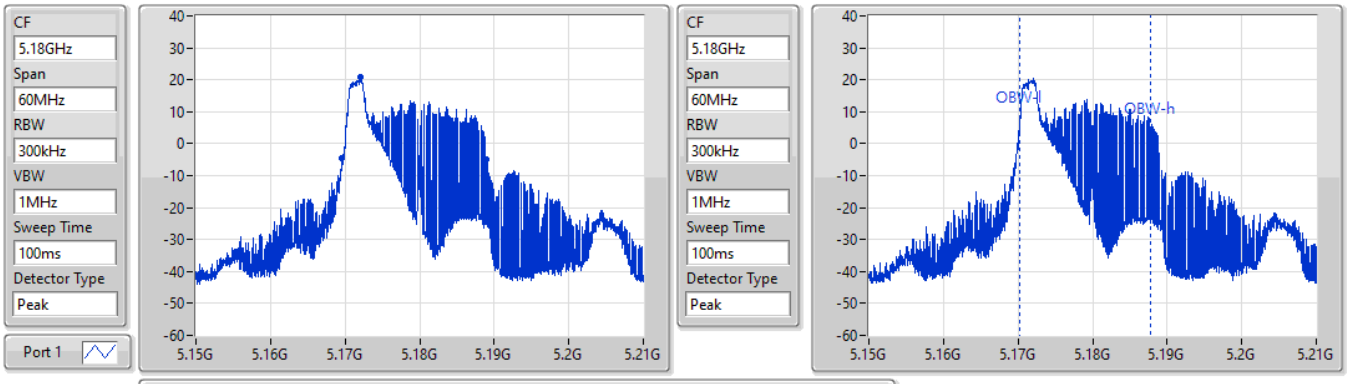


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.35M	5.16959G	5.18894G	17.571M	5.170255G	5.187826G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5200MHz

21/05/2022

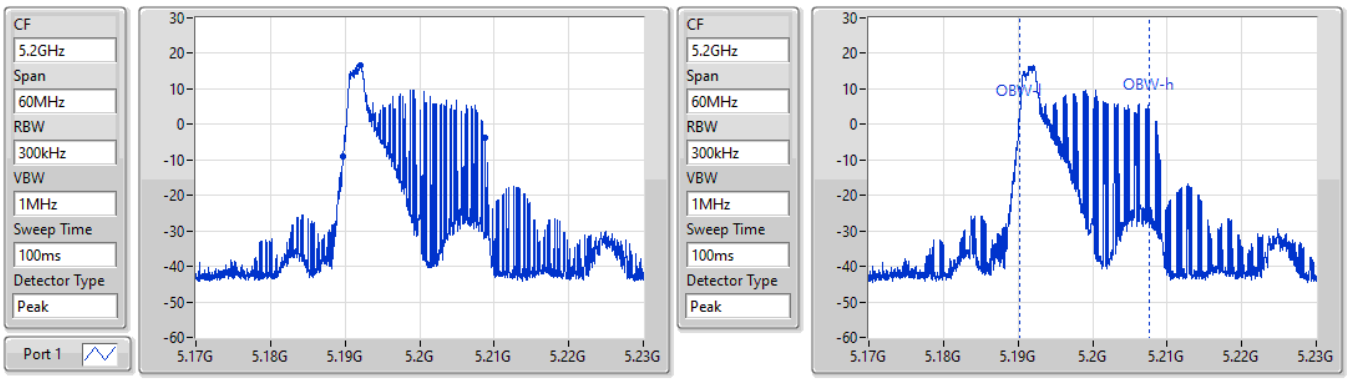


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.18968G	5.20885G	17.361M	5.190255G	5.207616G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5240MHz

21/05/2022

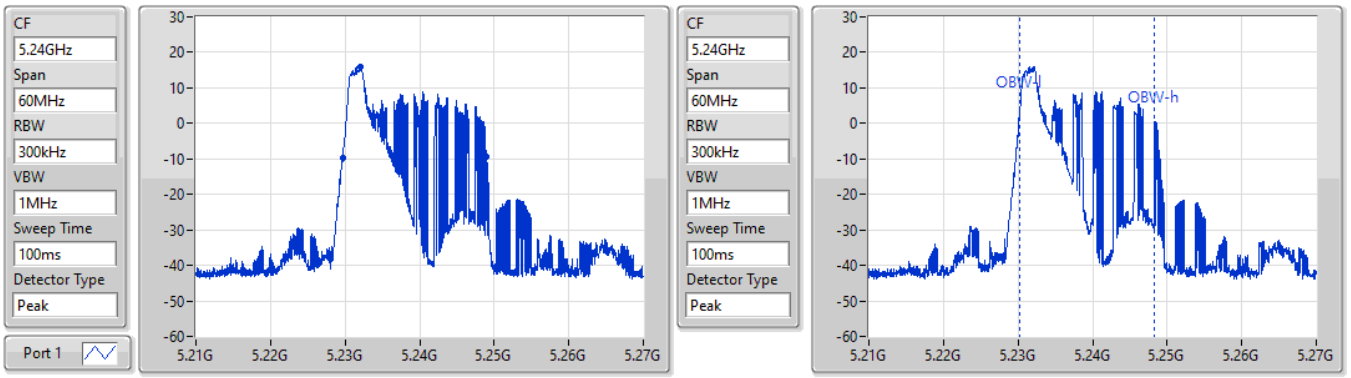


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.29M	5.22968G	5.24897G	18.081M	5.230255G	5.248336G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5260MHz


21/05/2022

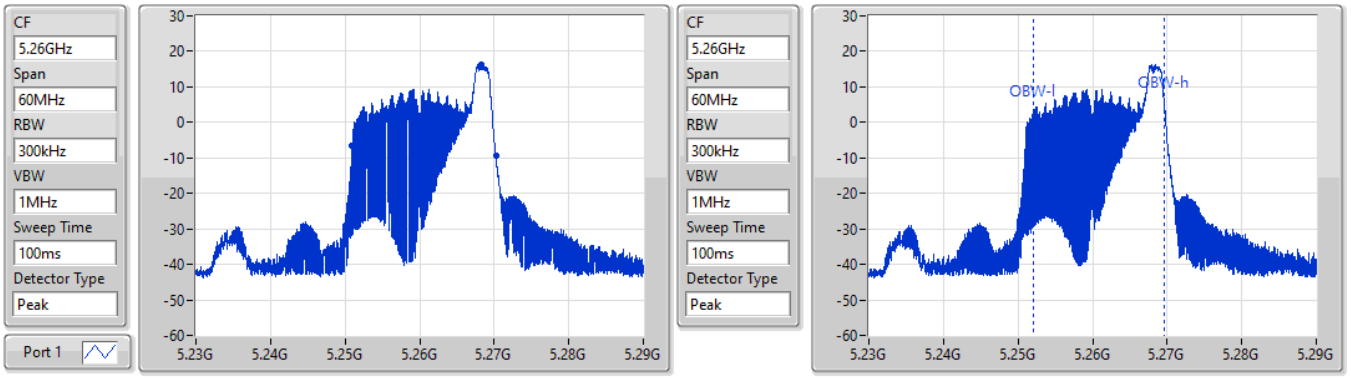

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.26M	5.25097G	5.27023G	17.601M	5.252054G	5.269655G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5300MHz

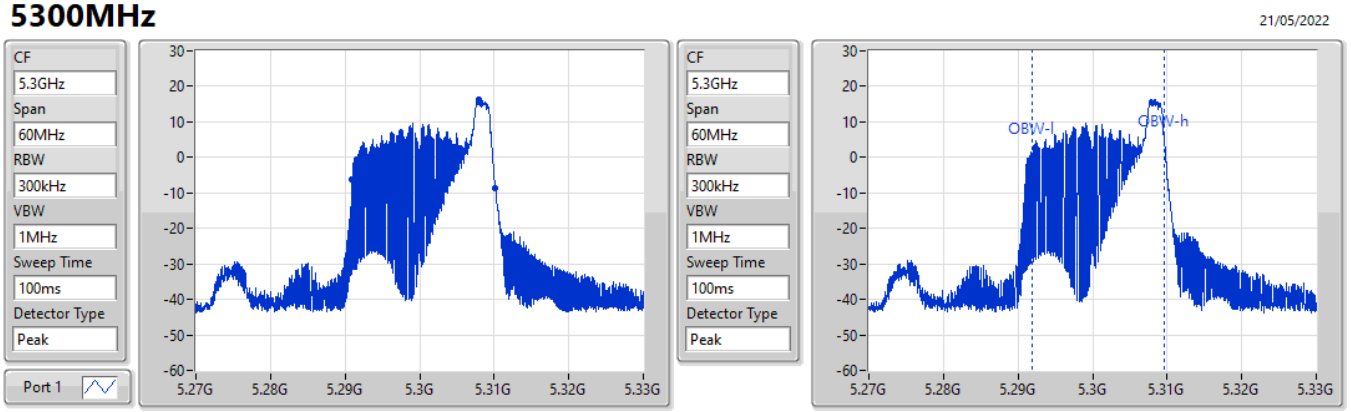

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.2M	5.29097G	5.31017G	17.781M	5.291874G	5.309655G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5320MHz

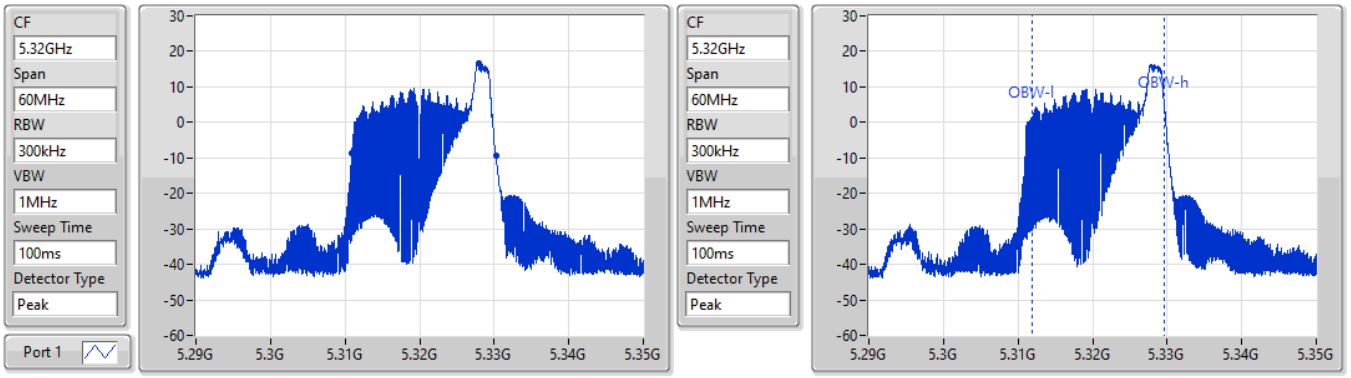


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.32M	5.31091G	5.33023G	17.751M	5.311904G	5.329655G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5500MHz

21/05/2022

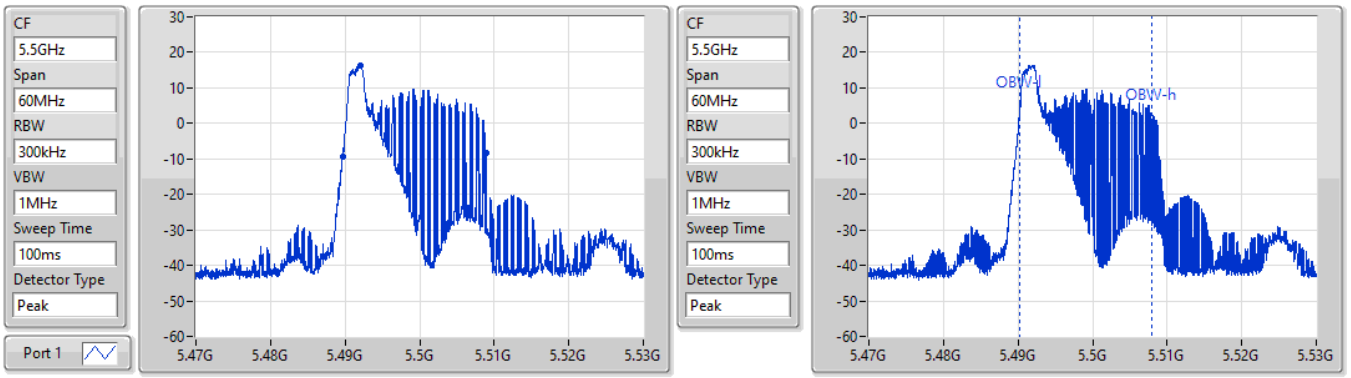


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.29M	5.48965G	5.50894G	17.751M	5.490255G	5.508006G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5580MHz

21/05/2022

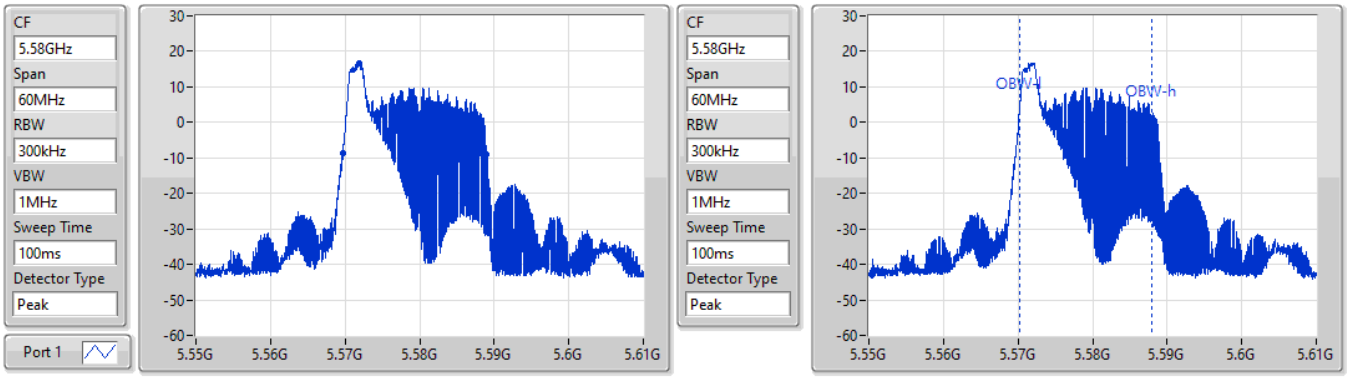


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.32M	5.56968G	5.589G	17.691M	5.570255G	5.587946G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5700MHz

23/05/2022

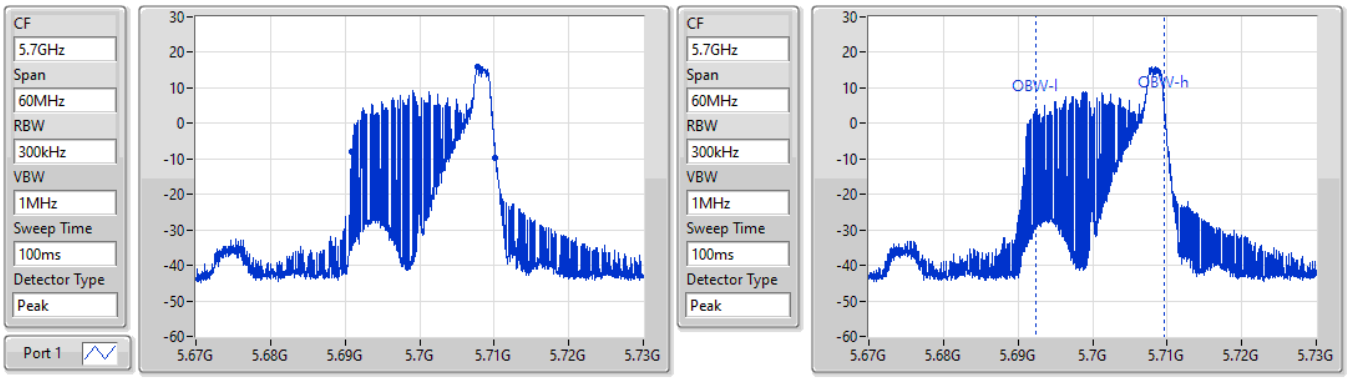


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.23M	5.69094G	5.71017G	17.301M	5.692354G	5.709655G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.47-5.725GHz

03/06/2022

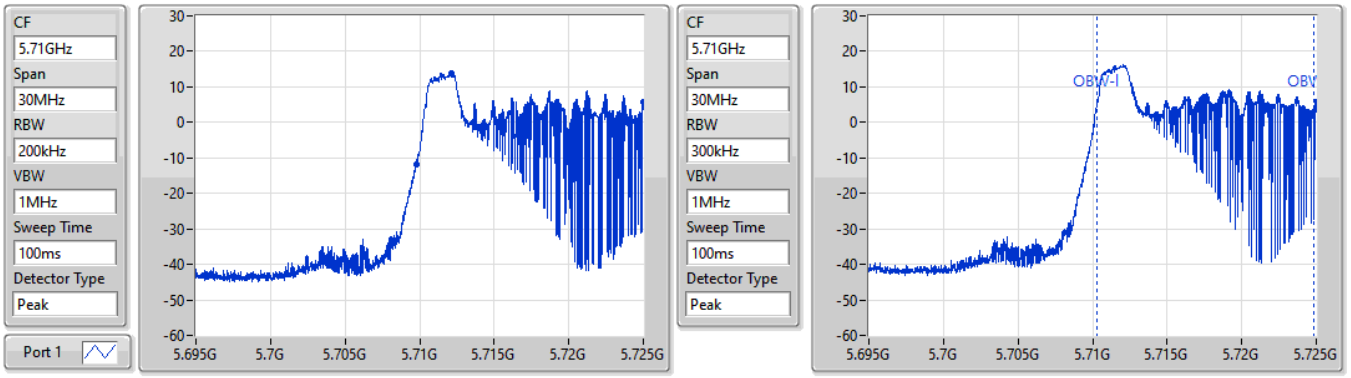


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.24M	5.709976G	5.725G	14.558M	5.71027G	5.724828G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz

03/06/2022

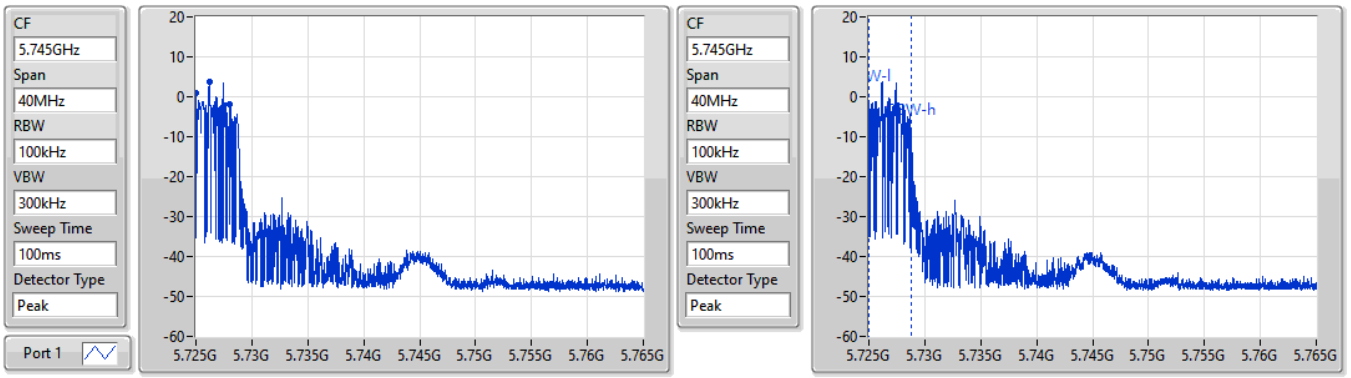


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.06M	5.725G	5.72806G	3.778M	5.72503G	5.728808G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz


03/06/2022

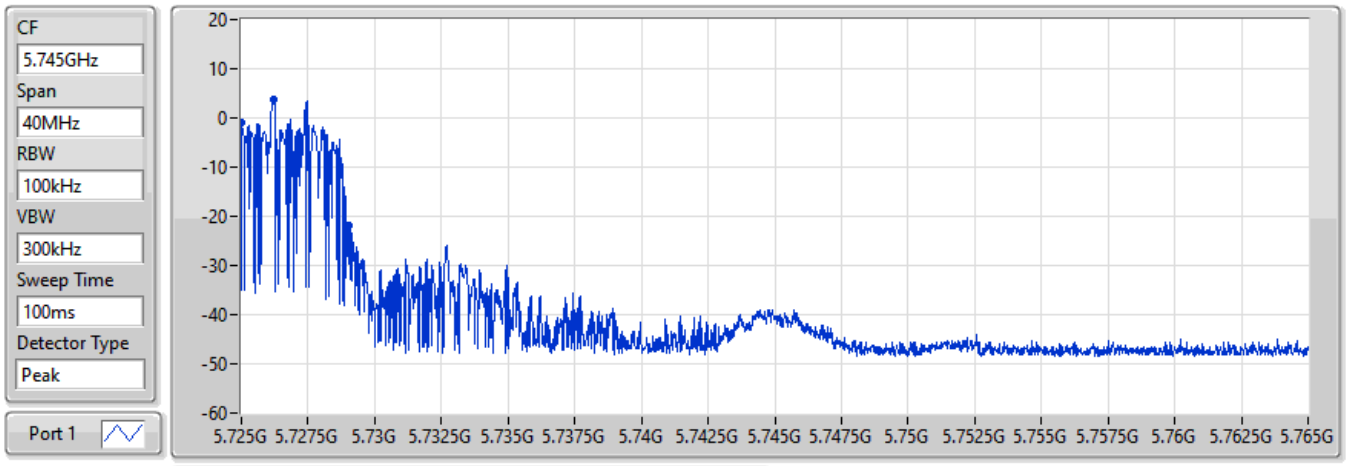

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
4.02M	5.72502G	5.72904G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**


5745MHz

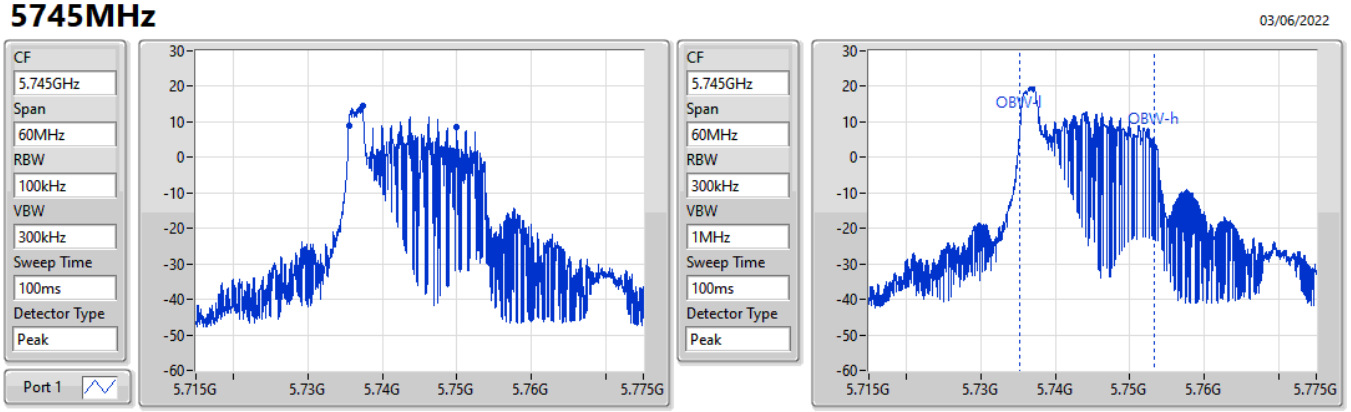

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.43M	5.73549G	5.74992G	18.021M	5.735255G	5.753276G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5745MHz

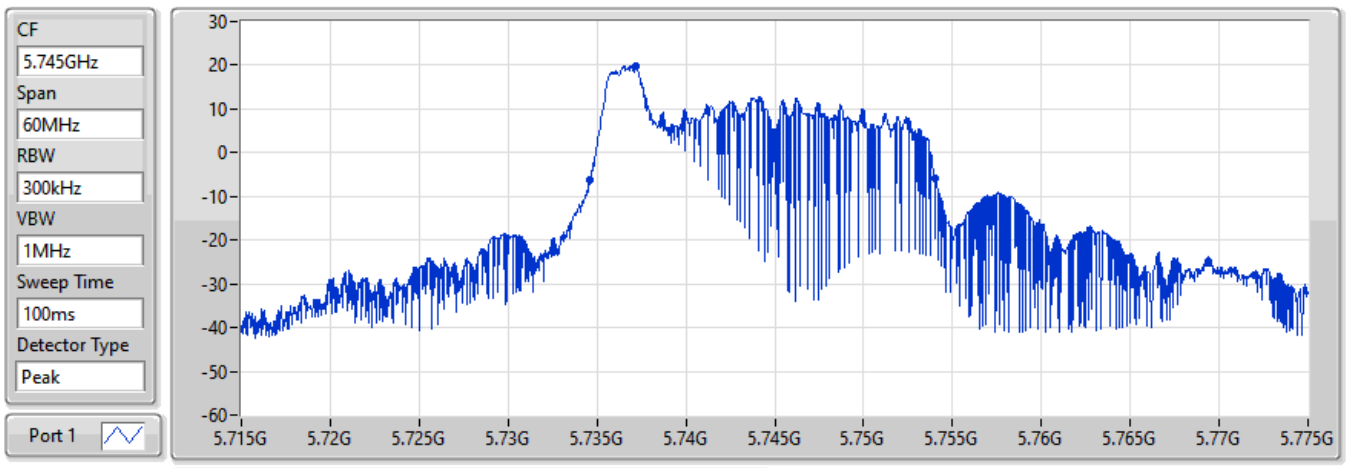


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.41M	5.73459G	5.754G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5785MHz

03/06/2022

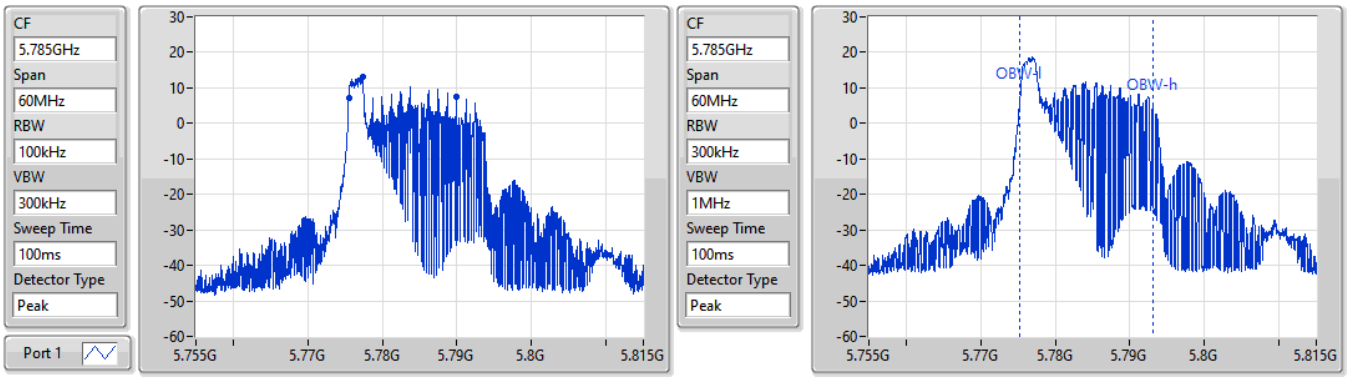


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.49M	5.77549G	5.78998G	17.811M	5.775255G	5.793066G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5785MHz


03/06/2022

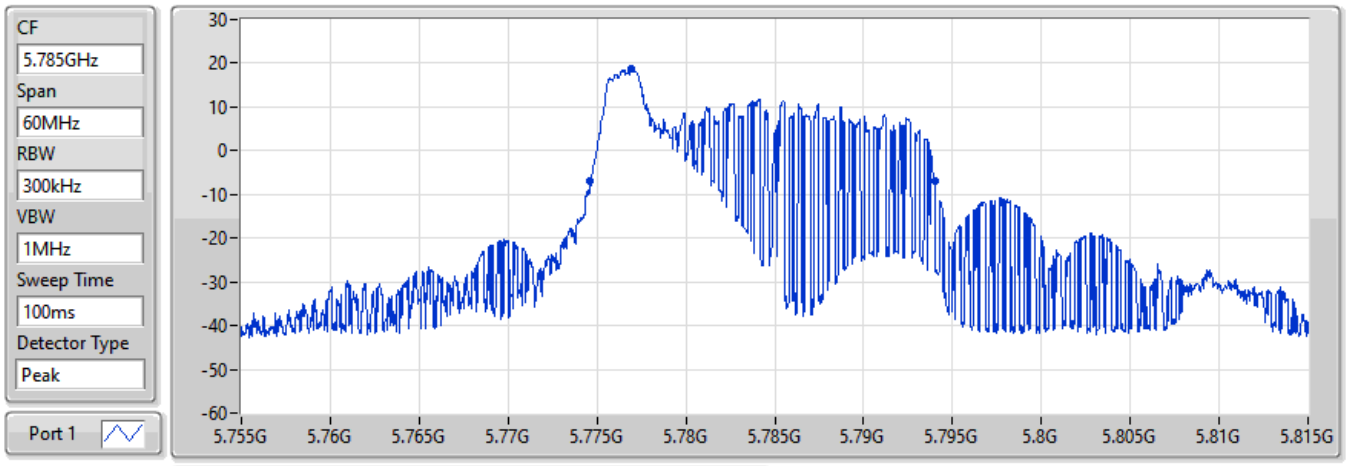

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.41M	5.77462G	5.79403G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**


5825MHz

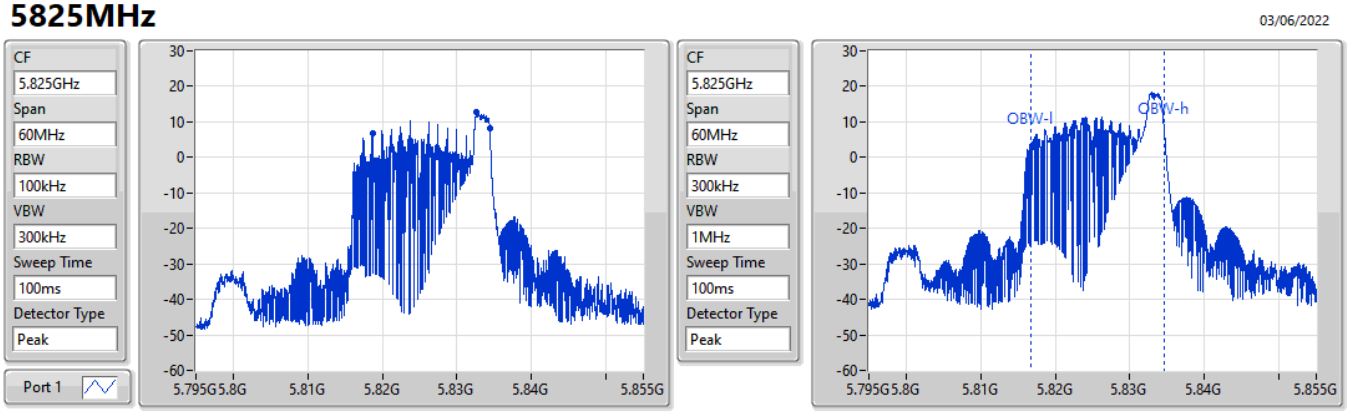

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.69M	5.8187G	5.83439G	17.961M	5.816694G	5.834655G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5825MHz

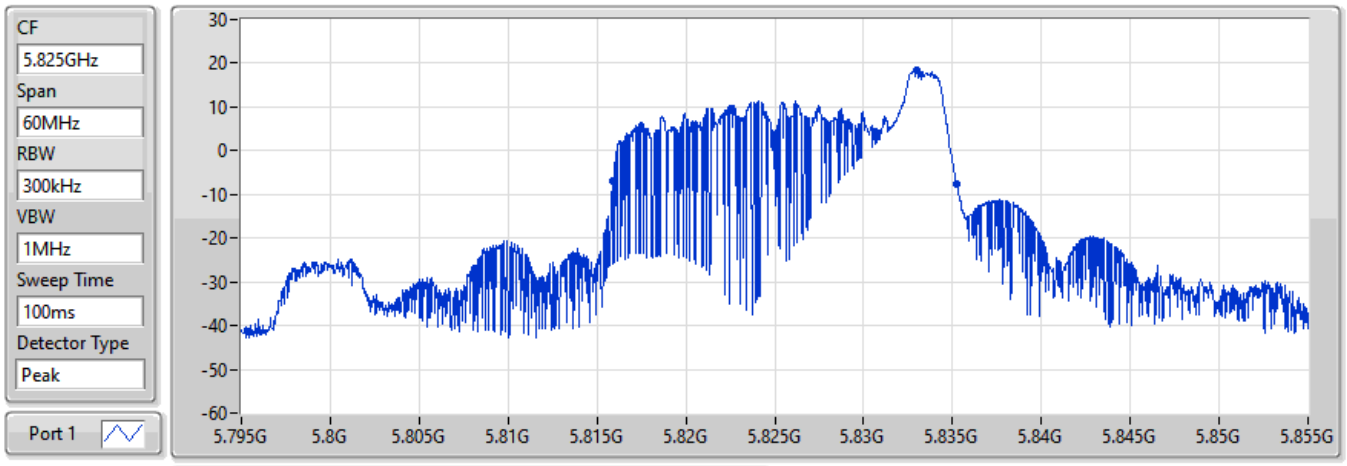

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.32M	5.81591G	5.83523G	Inf	1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.77M	17.811M	17M8D1D	19.08M	17.781M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.17M	17.871M	17M9D1D	19.17M	17.841M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.11M	17.811M	17M8D1D	14.925M	14.408M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	16.98M	18.351M	18M4D1D	2.52M	3.878M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	19.08M	17.781M
5200MHz	Pass	Inf	19.77M	17.811M
5240MHz	Pass	Inf	19.11M	17.811M
5260MHz	Pass	Inf	19.17M	17.841M
5300MHz	Pass	Inf	19.17M	17.841M
5320MHz	Pass	Inf	19.17M	17.871M
5500MHz	Pass	Inf	19.08M	17.781M
5580MHz	Pass	Inf	19.08M	17.781M
5700MHz	Pass	Inf	19.11M	17.811M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	14.925M	14.408M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.52M	3.878M
5745MHz	Pass	500k	16.98M	18.291M
5785MHz	Pass	500k	16.98M	18.351M
5825MHz	Pass	500k	15.69M	18.201M


Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

5180MHz

21/05/2022

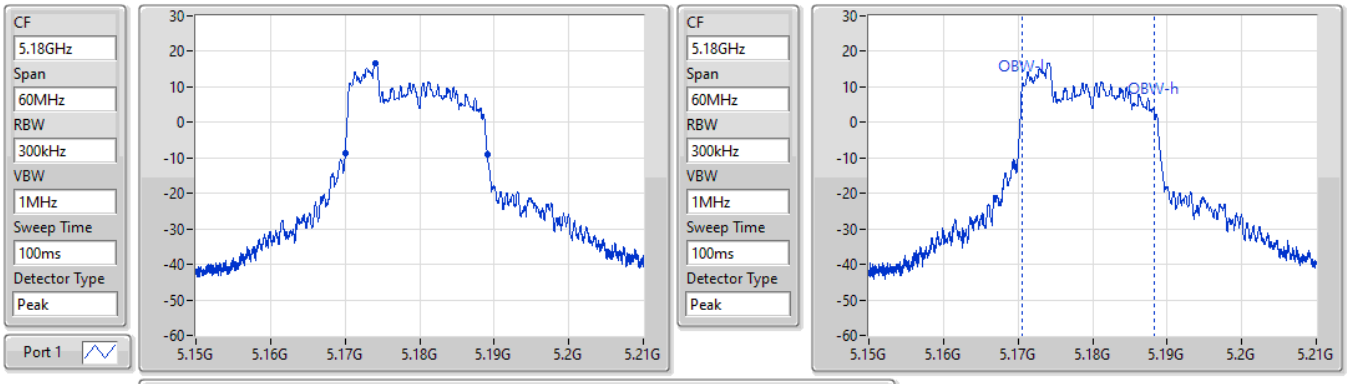


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.17001G	5.18909G	17.781M	5.170495G	5.188276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX

EBW

5200MHz

21/05/2022

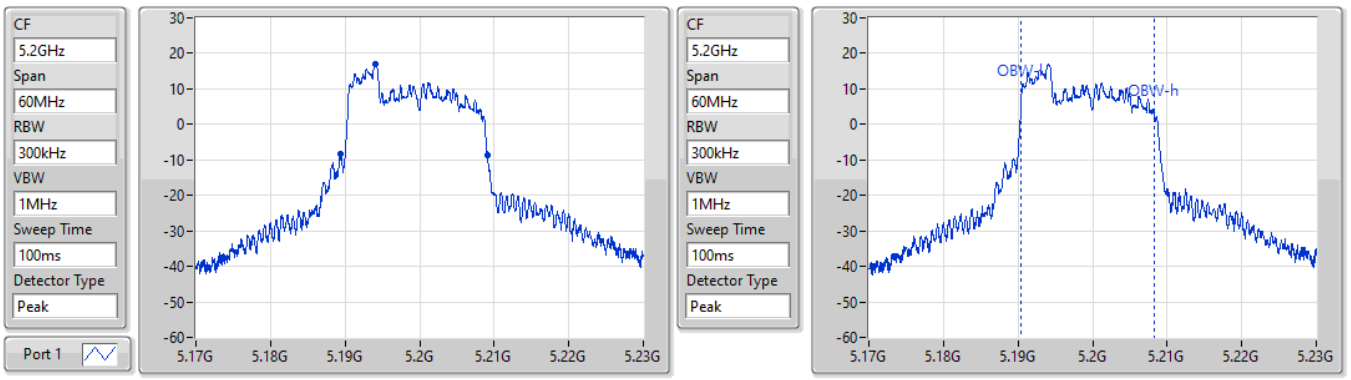


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.77M	5.18932G	5.20909G	17.811M	5.190465G	5.208276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5240MHz

21/05/2022

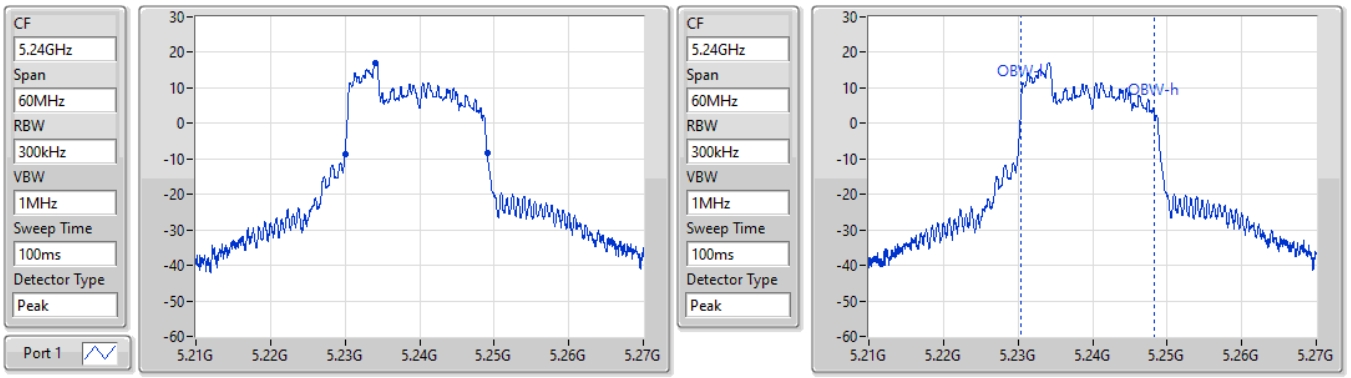


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.22998G	5.24909G	17.811M	5.230465G	5.248276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5260MHz

21/05/2022

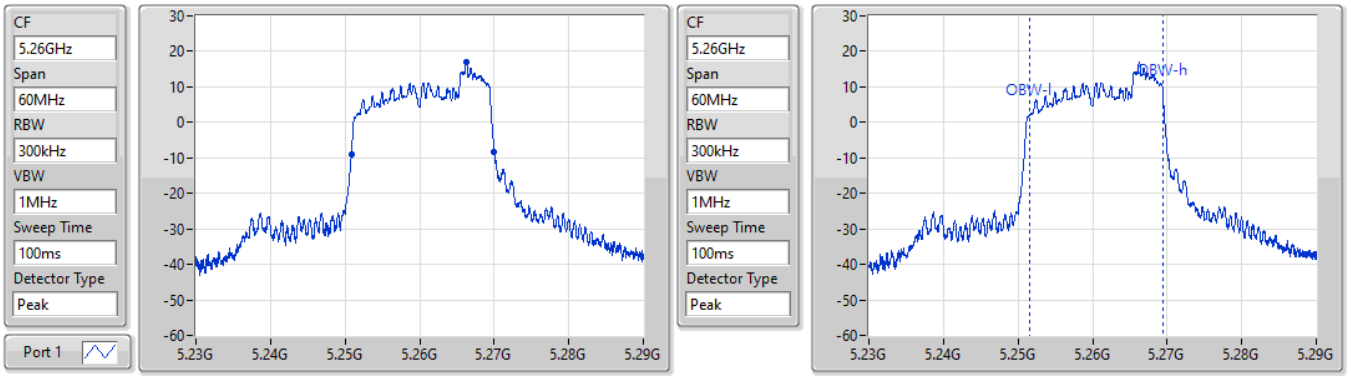


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.25085G	5.27002G	17.841M	5.251604G	5.269445G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5300MHz

21/05/2022

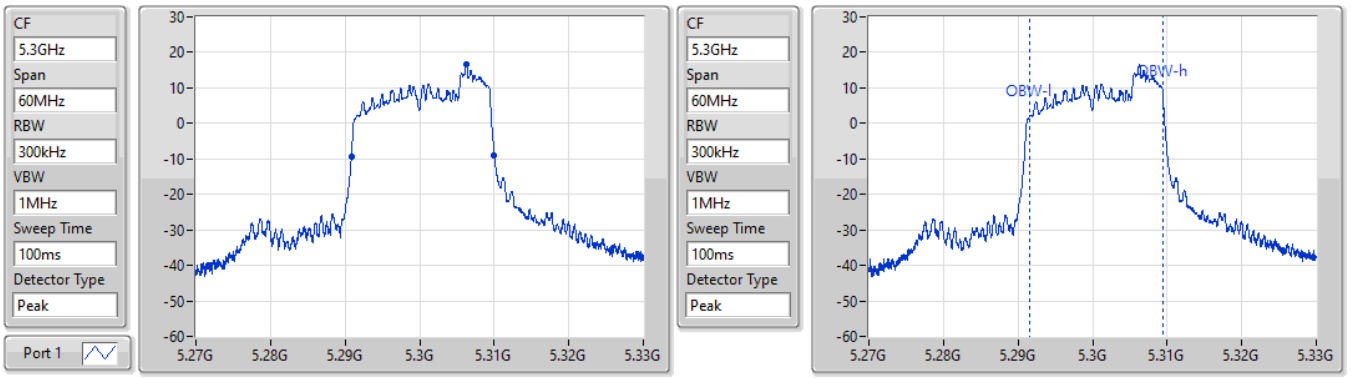


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.29085G	5.31002G	17.841M	5.291604G	5.309445G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5320MHz


21/05/2022

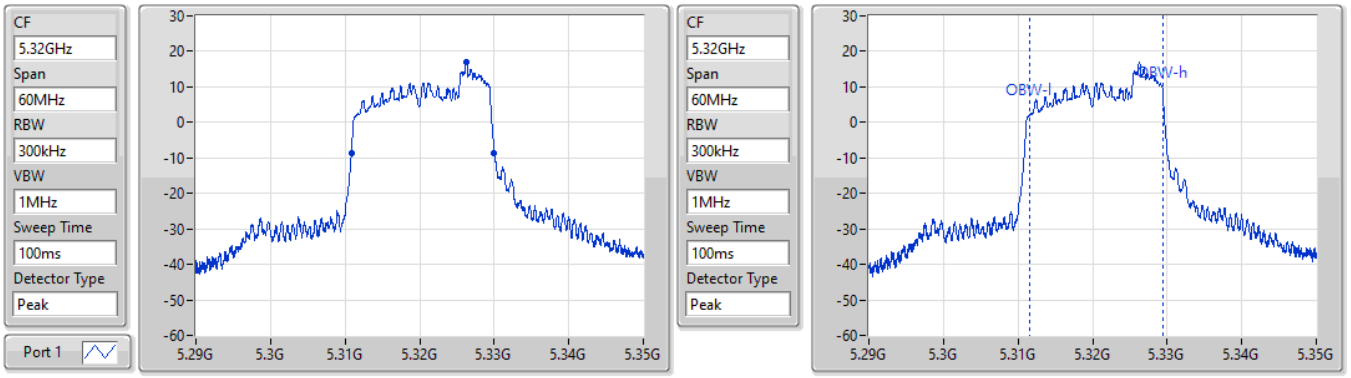

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.31085G	5.33002G	17.871M	5.311574G	5.329445G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5500MHz

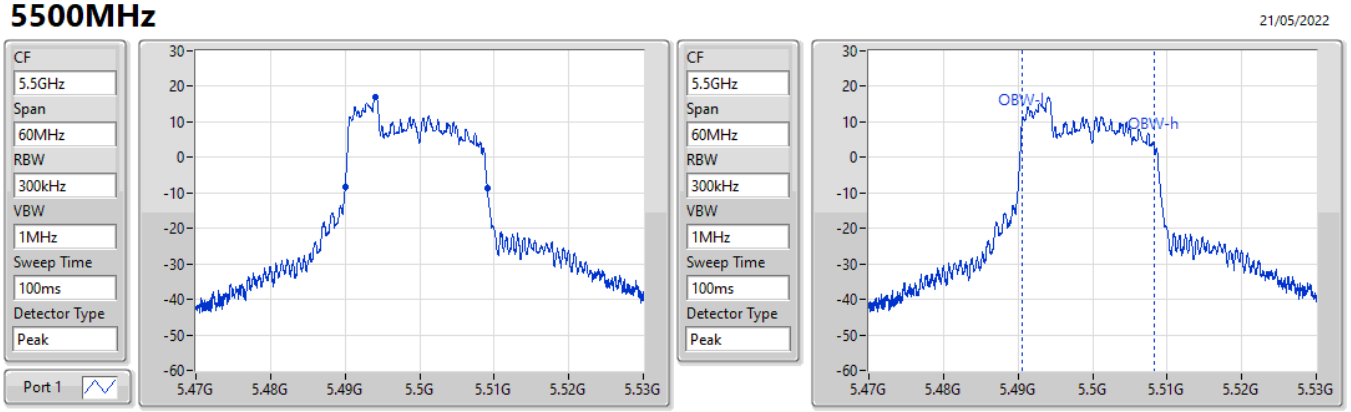

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.49001G	5.50909G	17.781M	5.490495G	5.508276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5580MHz

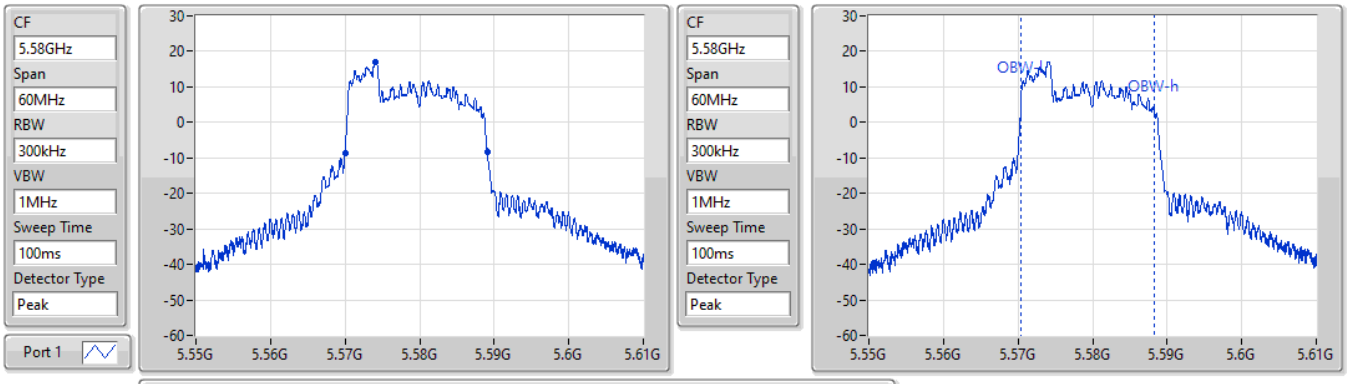


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.56998G	5.58906G	17.781M	5.570465G	5.588246G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5700MHz

23/05/2022

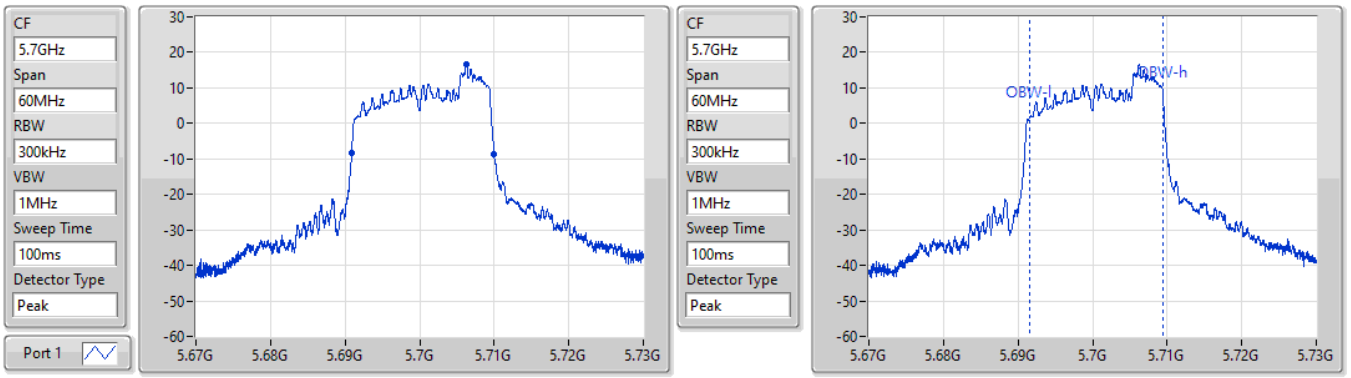


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.69088G	5.70999G	17.811M	5.691634G	5.709445G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.47-5.725GHz

03/06/2022

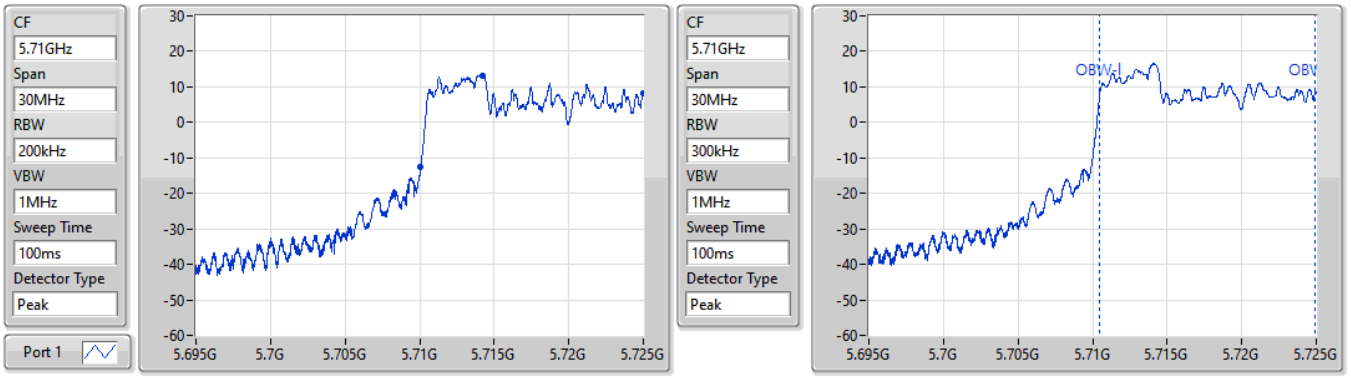


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.925M	5.710075G	5.725G	14.408M	5.71048G	5.724888G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz

03/06/2022

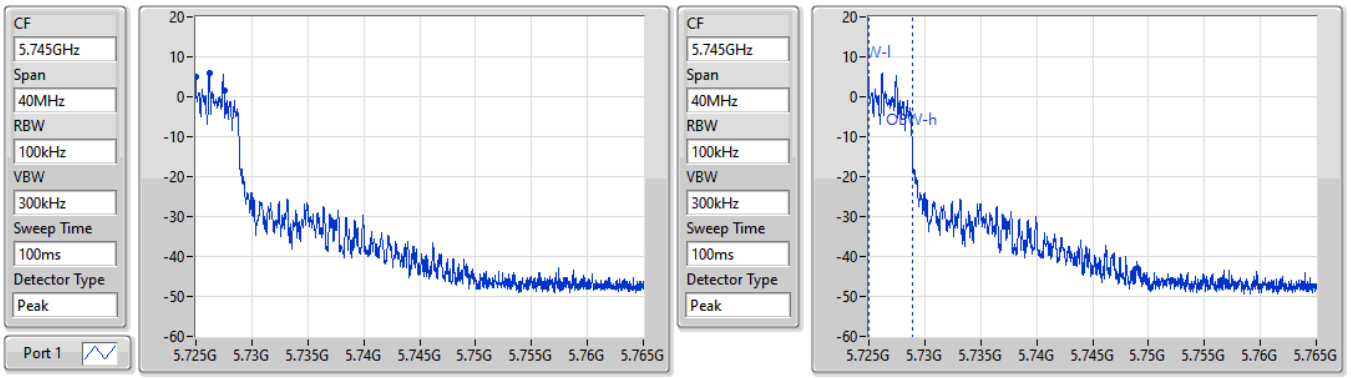


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.52M	5.725G	5.72752G	3.878M	5.72501G	5.728888G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz

03/06/2022

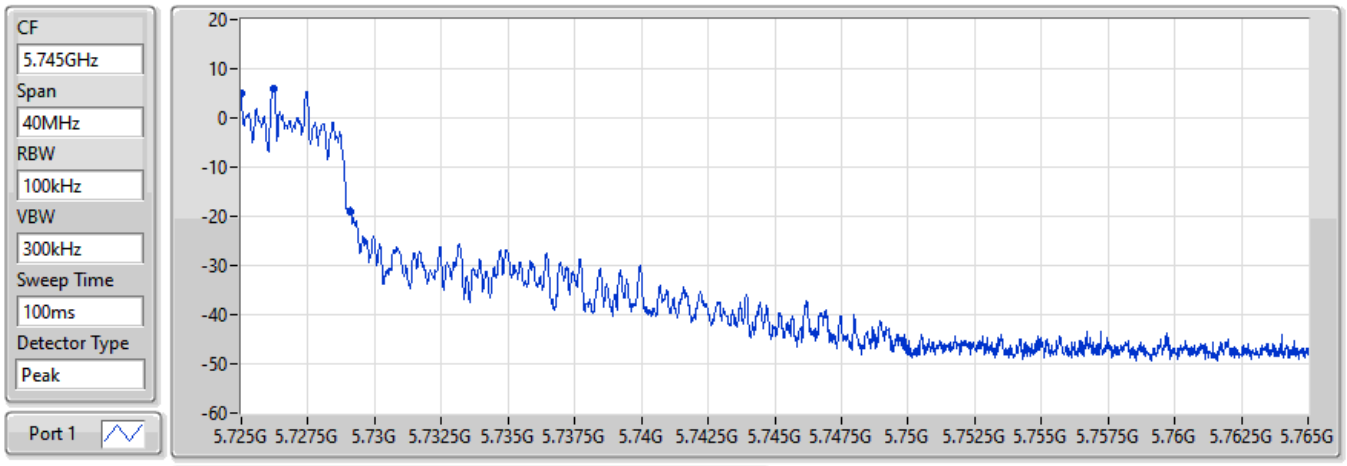


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
4.1M	5.725G	5.7291G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5745MHz

03/06/2022

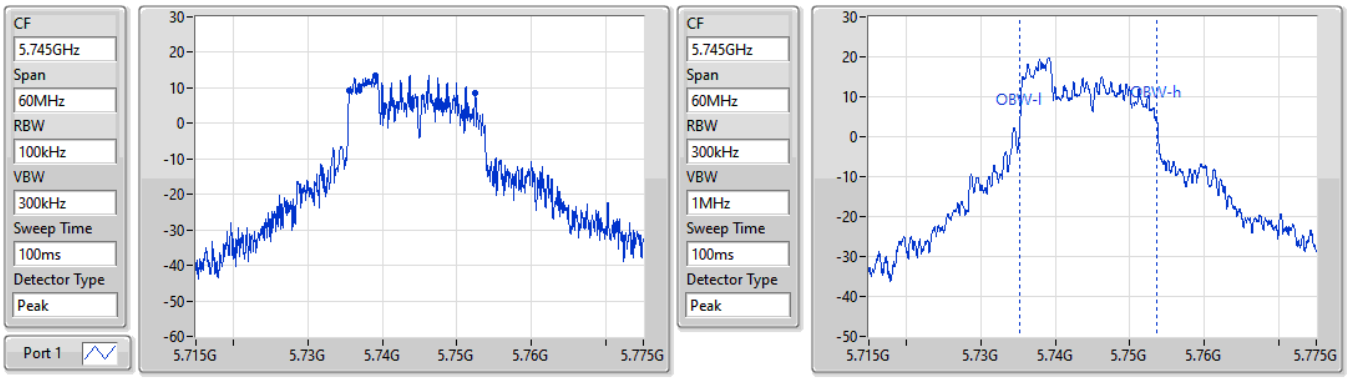


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.98M	5.73552G	5.7525G	18.291M	5.735255G	5.753546G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5745MHz

03/06/2022

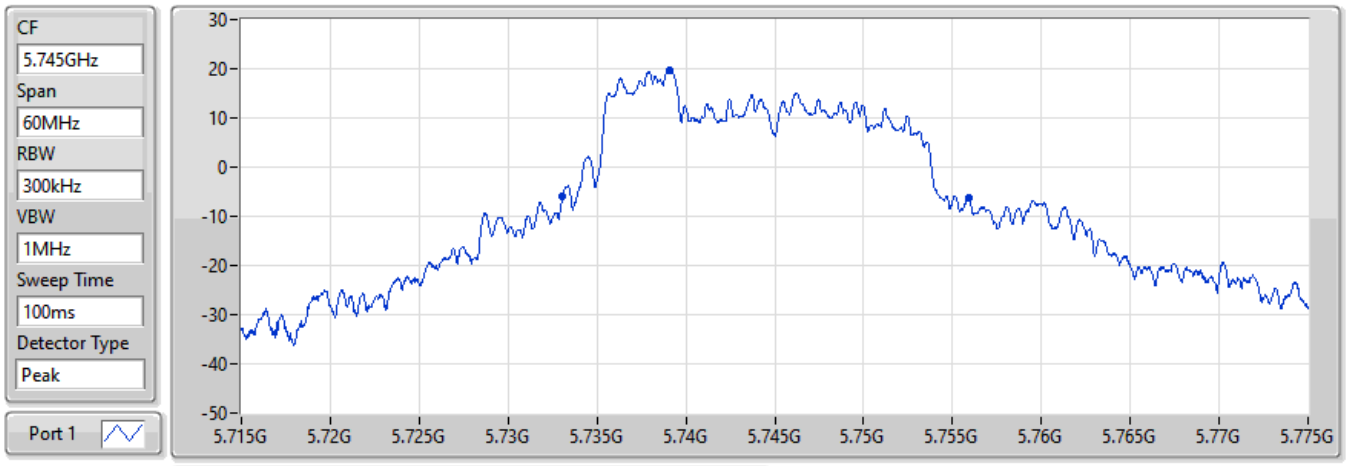


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
22.86M	5.73306G	5.75592G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5785MHz

03/06/2022

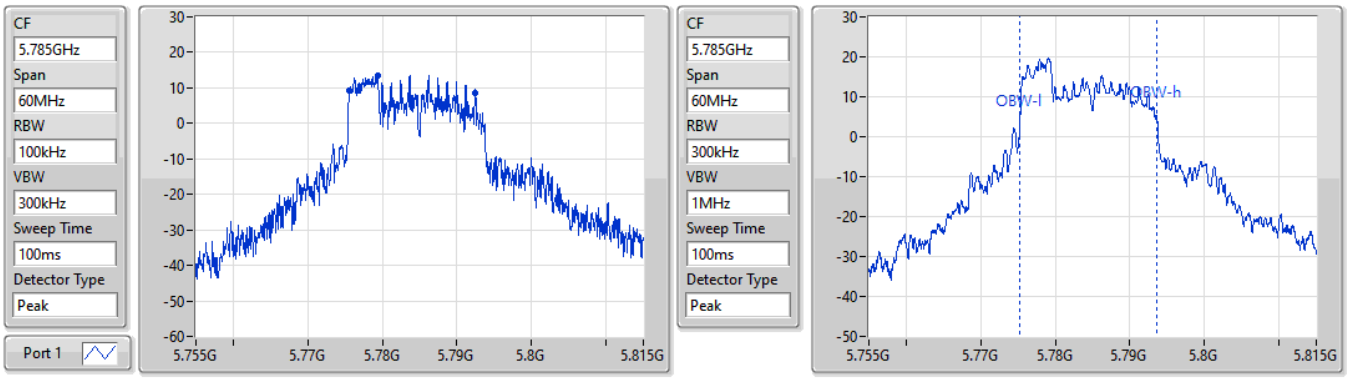


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.98M	5.77552G	5.7925G	18.351M	5.775255G	5.793606G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5785MHz


03/06/2022

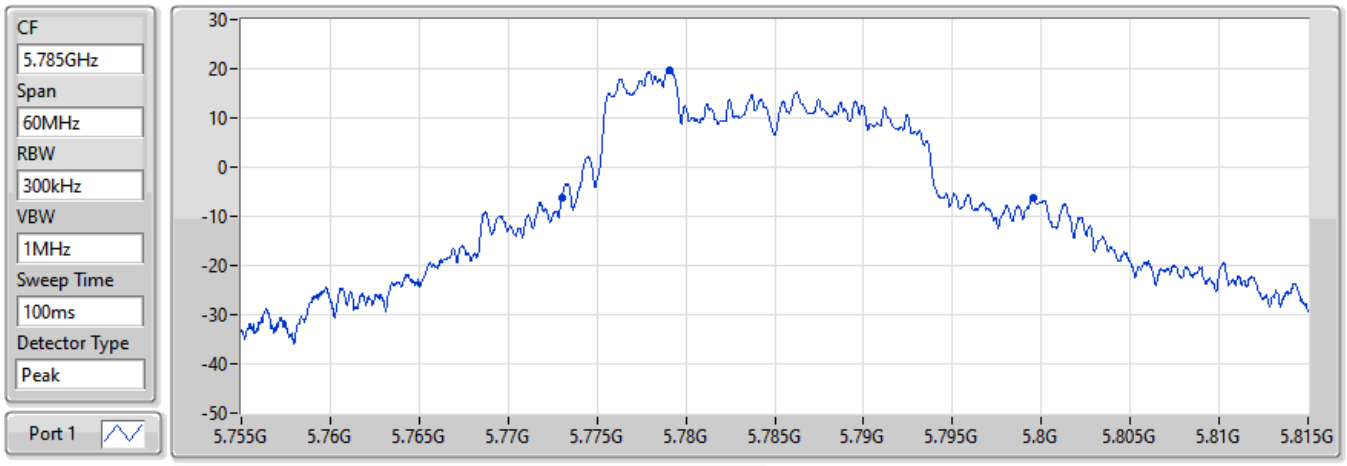

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
26.52M	5.77303G	5.79955G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**


5825MHz

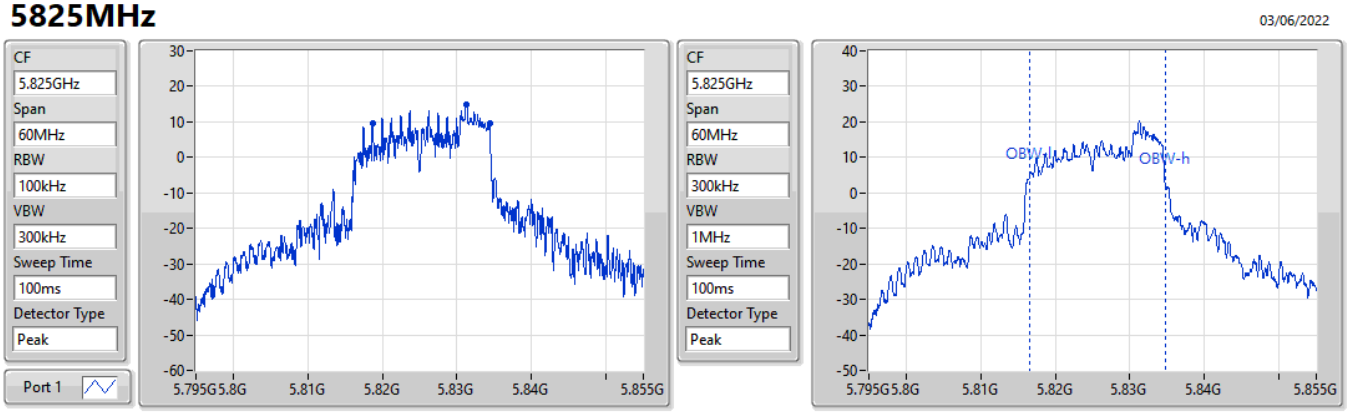

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.69M	5.81867G	5.83436G	18.201M	5.816514G	5.834715G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5825MHz

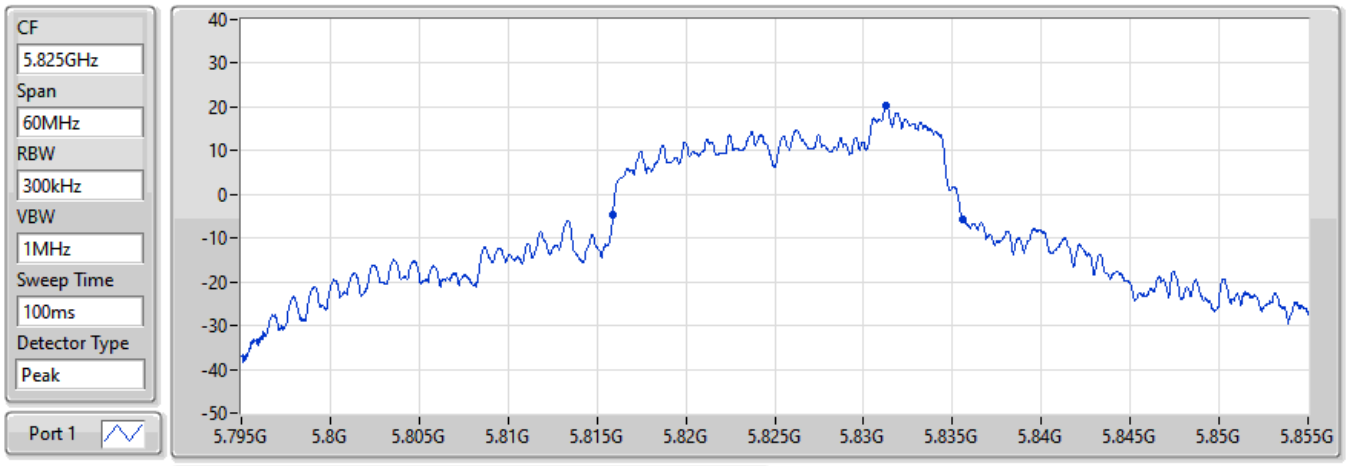

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.71M	5.81588G	5.83559G	Inf	1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	21.51M	17.811M	17M8D1D	19.53M	17.781M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	20.16M	17.781M	17M8D1D	19.95M	17.751M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.95M	17.781M	17M8D1D	14.82M	14.378M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	16.98M	19.16M	19M2D1D	2.52M	3.918M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	21.51M	17.811M
5200MHz	Pass	Inf	19.56M	17.781M
5240MHz	Pass	Inf	19.53M	17.781M
5260MHz	Pass	Inf	20.16M	17.751M
5300MHz	Pass	Inf	20.16M	17.751M
5320MHz	Pass	Inf	19.95M	17.781M
5500MHz	Pass	Inf	19.08M	17.781M
5580MHz	Pass	Inf	19.17M	17.751M
5700MHz	Pass	Inf	19.95M	17.751M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	14.82M	14.378M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.52M	3.918M
5745MHz	Pass	500k	16.98M	18.381M
5785MHz	Pass	500k	16.98M	18.351M
5825MHz	Pass	500k	15.09M	19.16M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5180MHz

01/06/2022

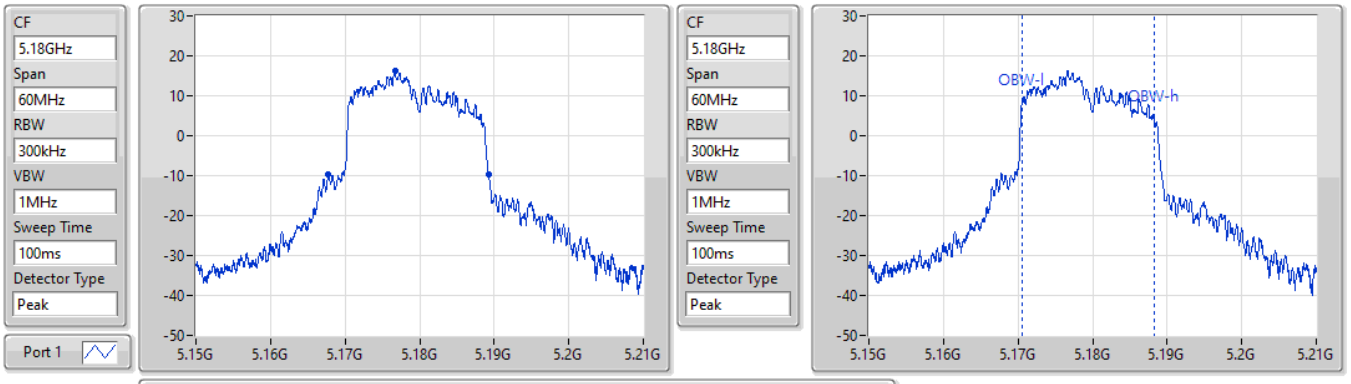


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
21.51M	5.16773G	5.18924G	17.811M	5.170495G	5.188306G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5200MHz


01/06/2022

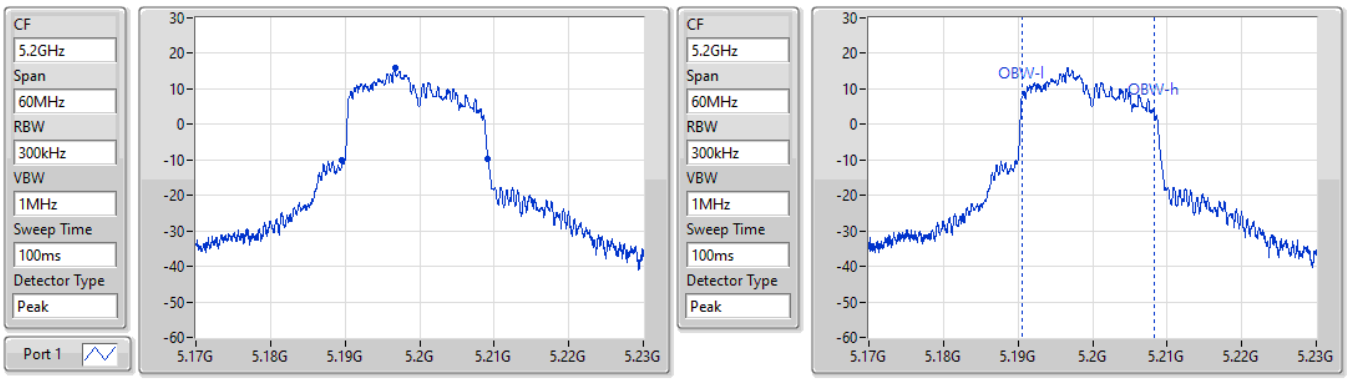

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.56M	5.18962G	5.20918G	17.781M	5.190495G	5.208276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5240MHz

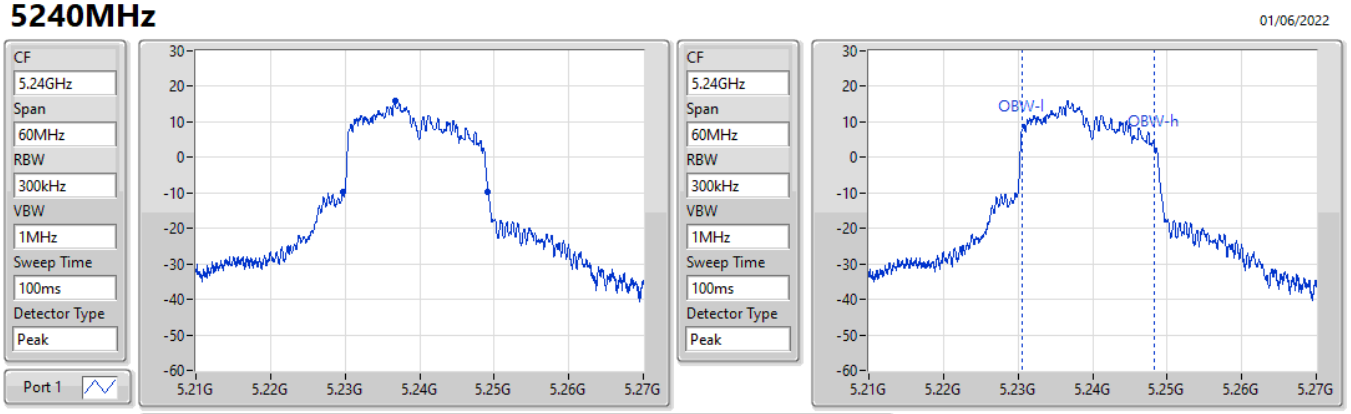

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.53M	5.22965G	5.24918G	17.781M	5.230495G	5.248276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5260MHz

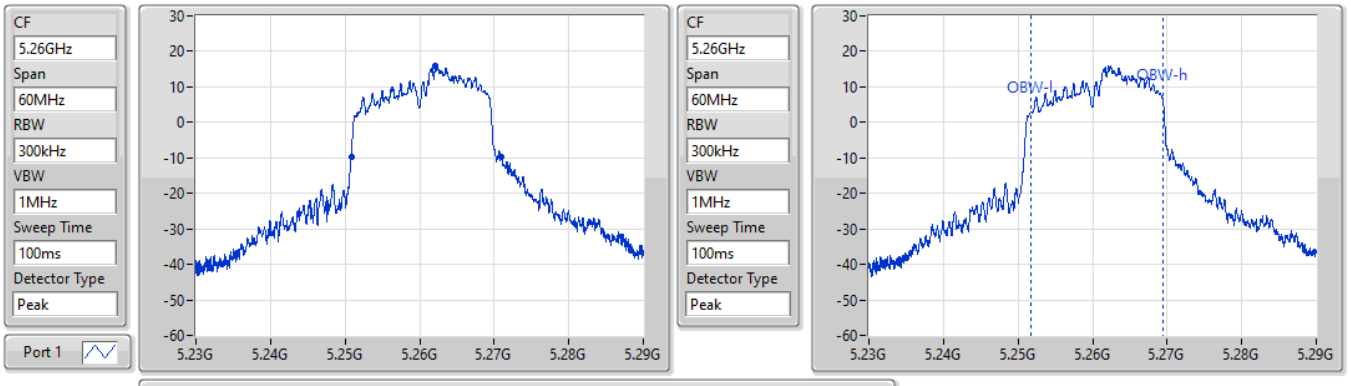

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.16M	5.25082G	5.27098G	17.751M	5.251664G	5.269415G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5300MHz

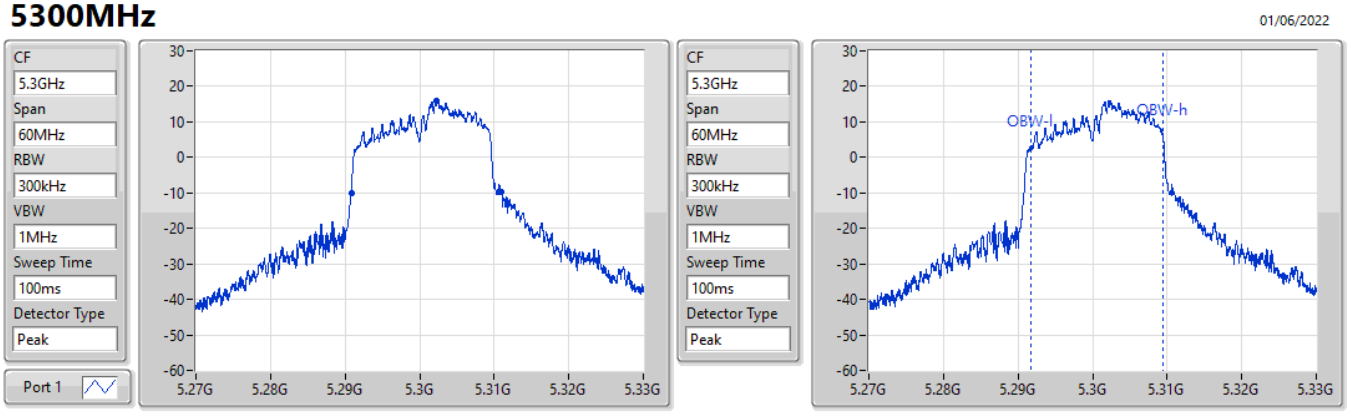

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.16M	5.29082G	5.31098G	17.751M	5.291664G	5.309415G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5320MHz

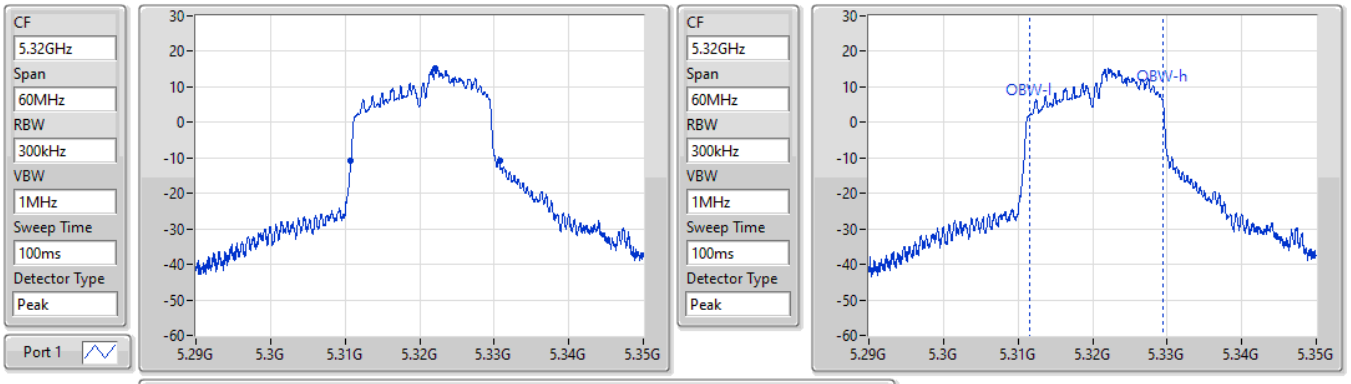


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.95M	5.31079G	5.33074G	17.781M	5.311634G	5.329415G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5500MHz

01/06/2022

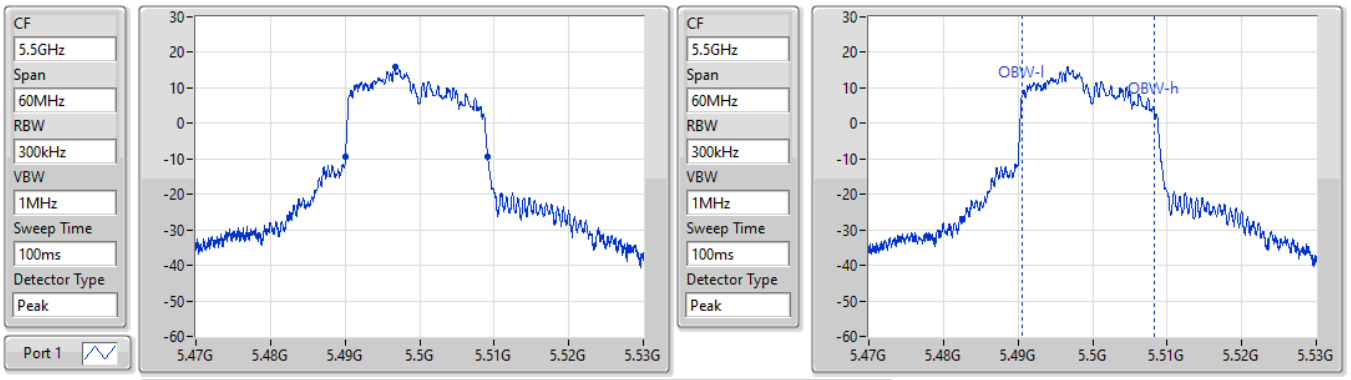


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.49007G	5.50915G	17.781M	5.490495G	5.508276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5580MHz

01/06/2022

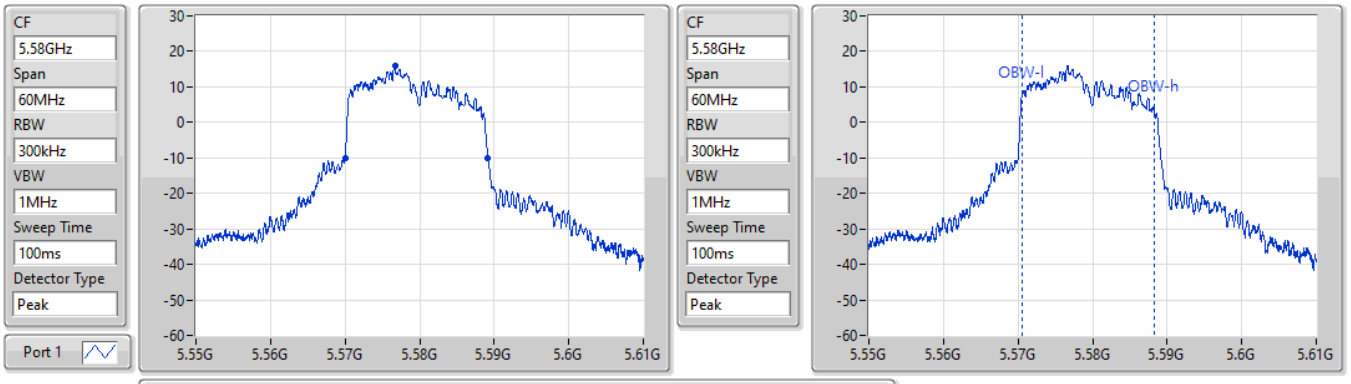


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.57001G	5.58918G	17.751M	5.570495G	5.588246G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5700MHz

01/06/2022

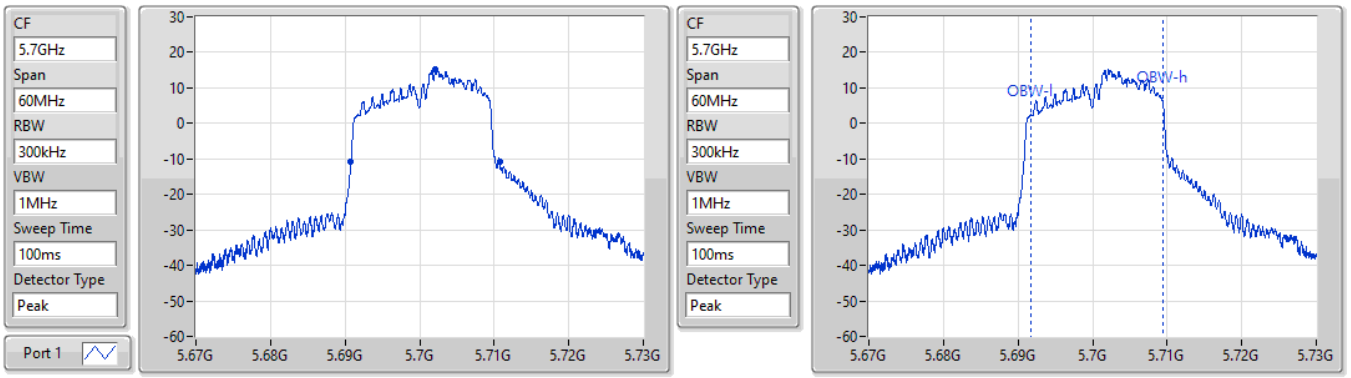


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.95M	5.69079G	5.71074G	17.751M	5.691664G	5.709415G	Inf	1


802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5720MHz Straddle 5.47-5.725GHz

03/06/2022

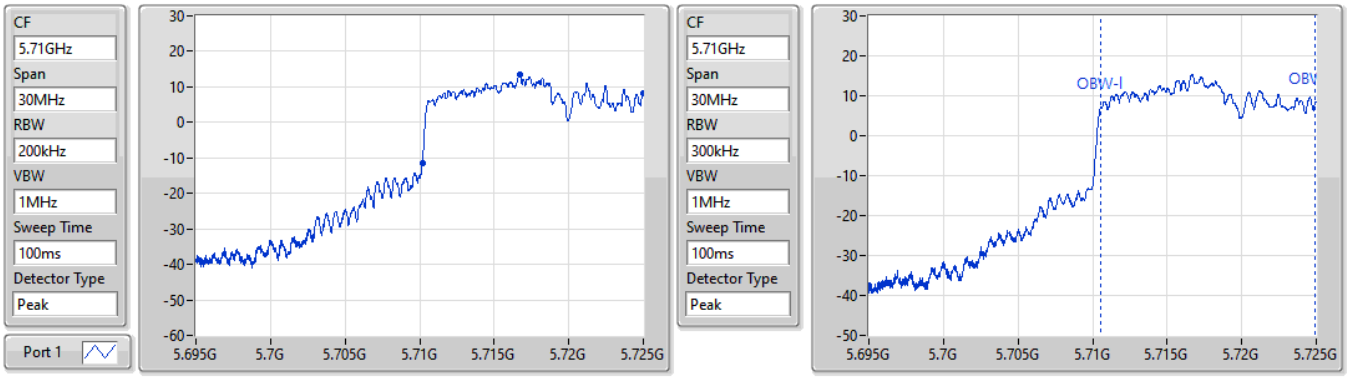

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.82M	5.71018G	5.725G	14.378M	5.71051G	5.724888G	Inf	1

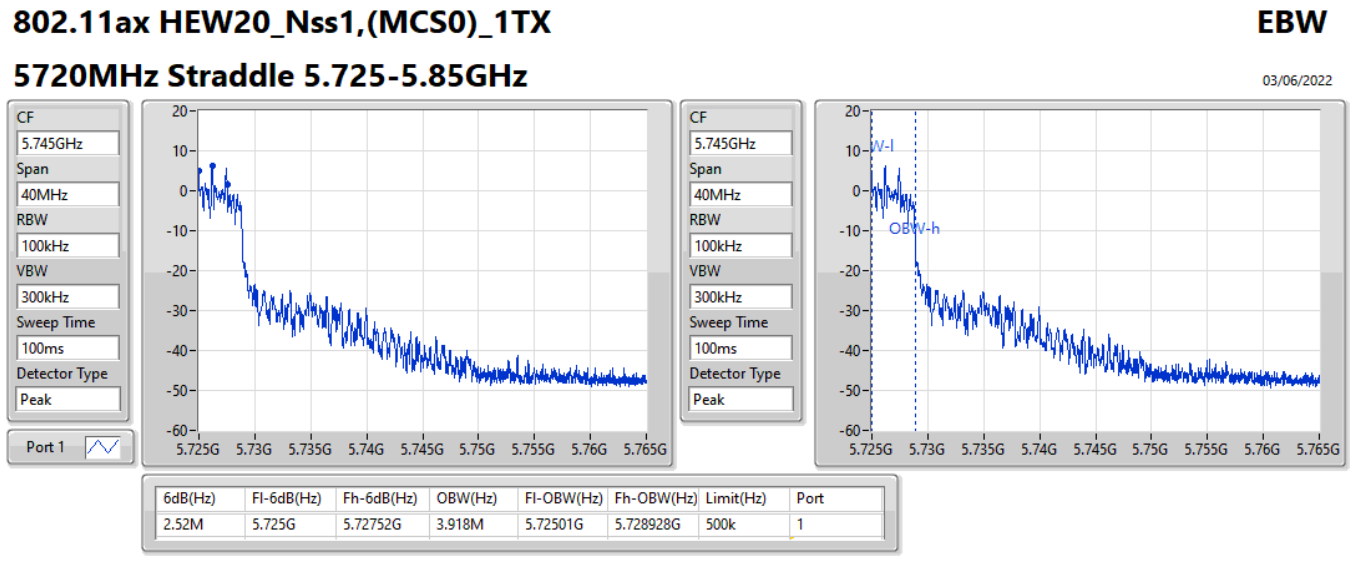

802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
5720MHz Straddle 5.725-5.85GHz
03/06/2022
CF
5.745GHz
Span
40MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak
Port 1
20
10
0
-10
-20
-30
-40
-50
-60
5.725G 5.73G 5.735G 5.74G 5.745G 5.75G 5.755G 5.76G 5.765G
OBW-l
OBW-h
6dB(Hz) Fl-6dB(Hz) Fh-6dB(Hz) OBW(Hz) Fl-OBW(Hz) Fh-OBW(Hz) Limit(Hz) Port
2.52M 5.725G 5.72752G 3.918M 5.72501G 5.728928G 500k 1

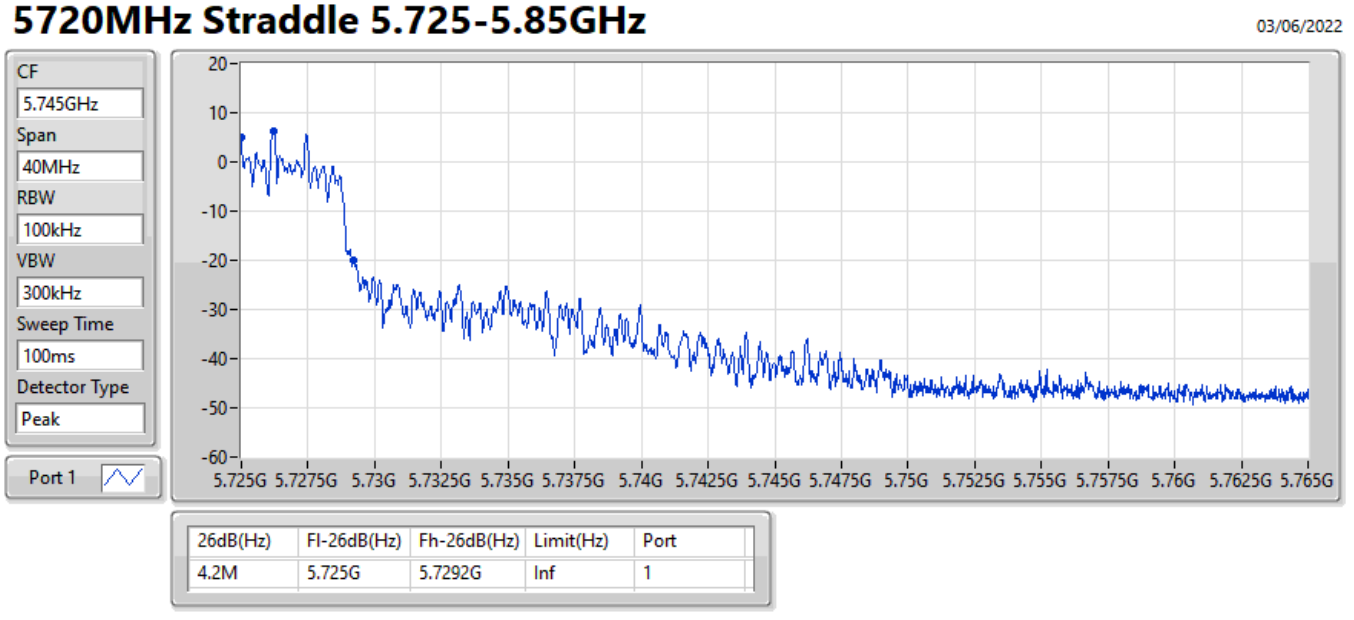
802.11ax HEW20_Nss1,(MCS0)_1TX
EBW
5720MHz Straddle 5.725-5.85GHz
03/06/2022
CF
5.745GHz
Span
40MHz
RBW
100kHz
VBW
300kHz
Sweep Time
100ms
Detector Type
Peak
Port 1
20
10
0
-10
-20
-30
-40
-50
-60
5.725G 5.7275G 5.73G 5.7325G 5.735G 5.7375G 5.74G 5.7425G 5.745G 5.7475G 5.75G 5.7525G 5.755G 5.7575G 5.76G 5.7625G 5.765G
26dB(Hz) Fl-26dB(Hz) Fh-26dB(Hz) Limit(Hz) Port
4.2M 5.725G 5.7292G Inf 1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5745MHz

03/06/2022

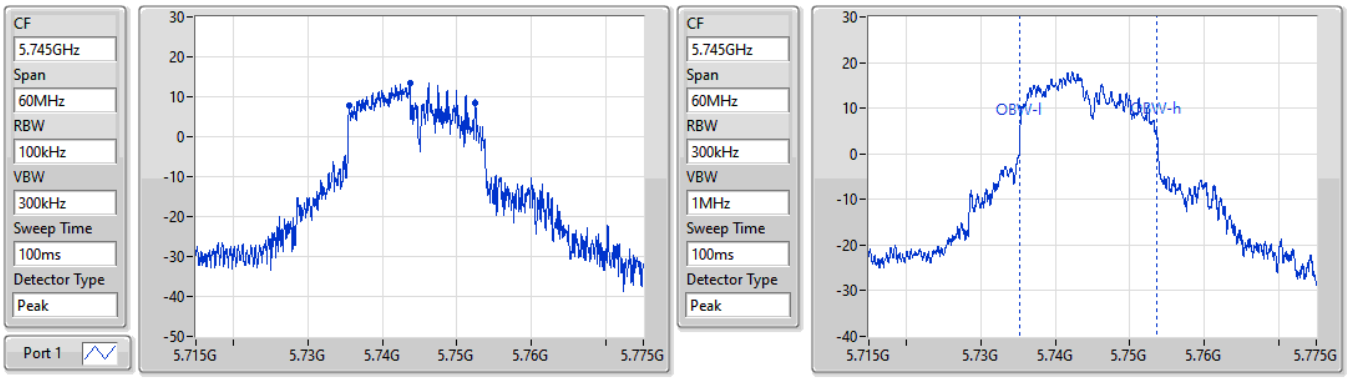


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.98M	5.73552G	5.7525G	18.381M	5.735255G	5.753636G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5745MHz

03/06/2022

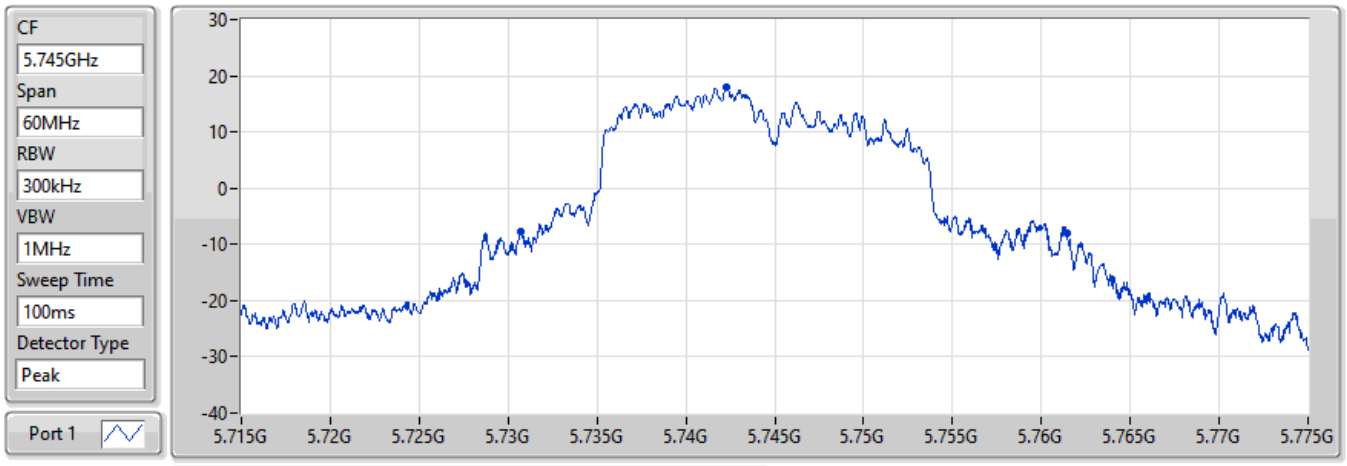


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
30.72M	5.73069G	5.76141G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5785MHz

03/06/2022

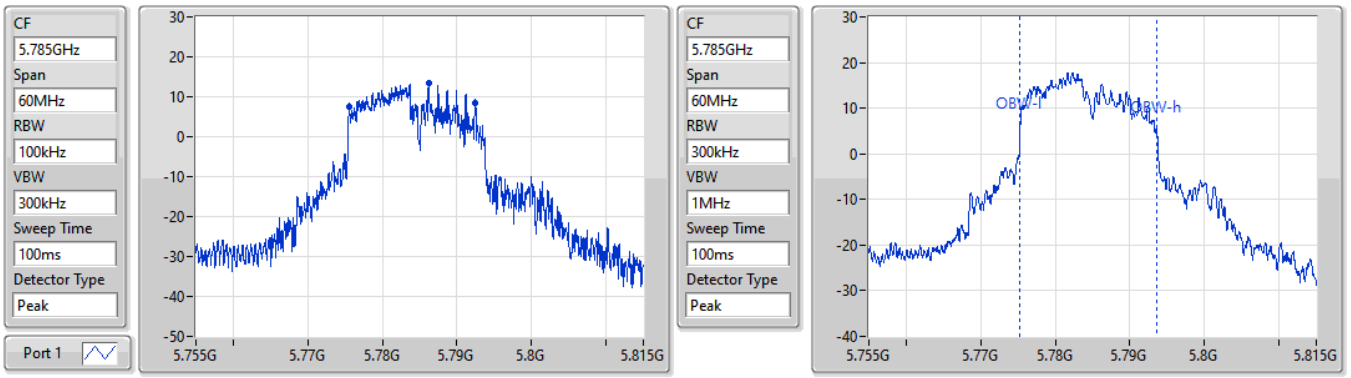


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.98M	5.77552G	5.7925G	18.351M	5.775285G	5.793636G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5785MHz


03/06/2022

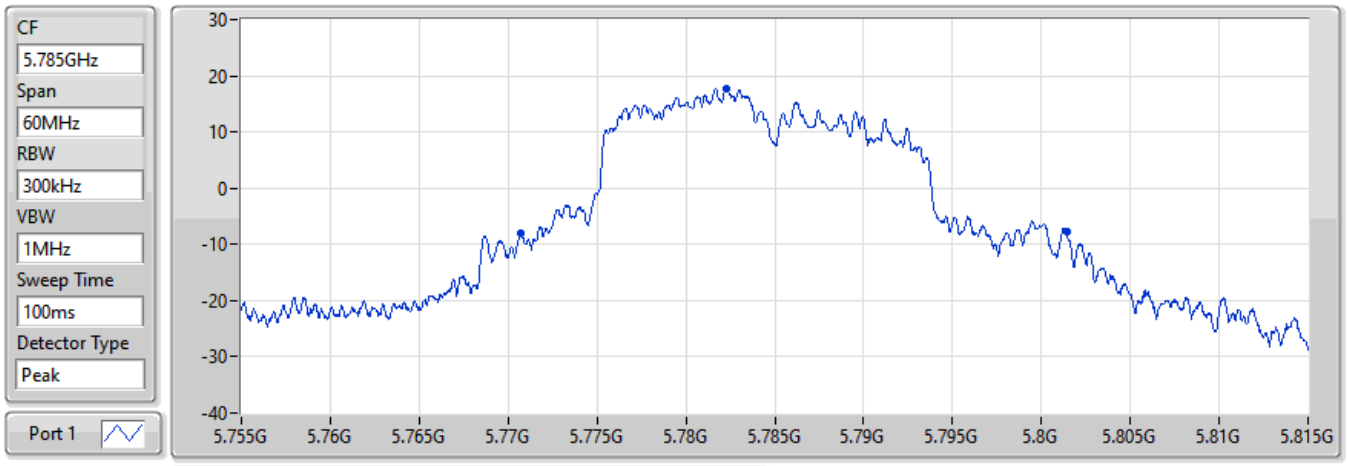

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
30.72M	5.77069G	5.80141G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5825MHz

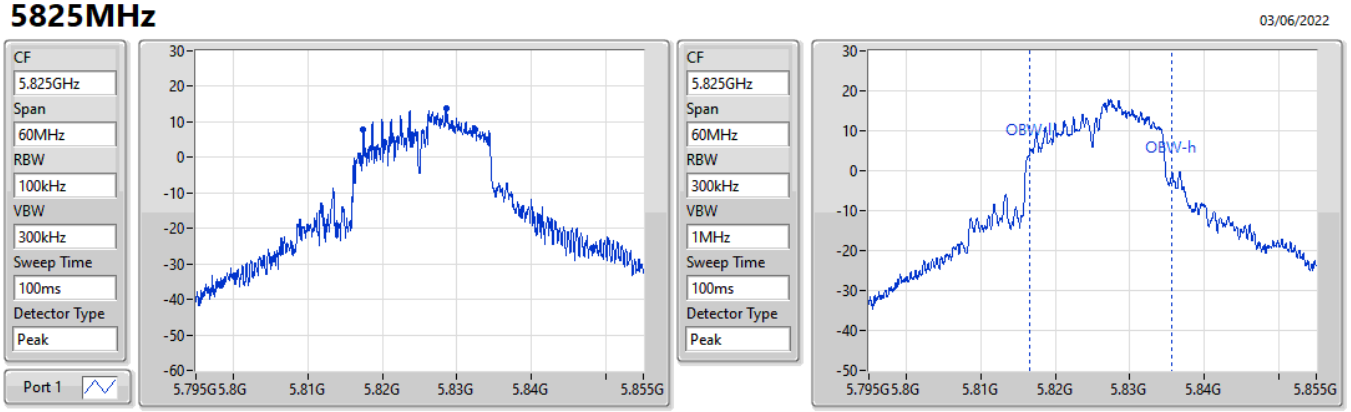

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.09M	5.81741G	5.8325G	19.16M	5.816514G	5.835675G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5825MHz

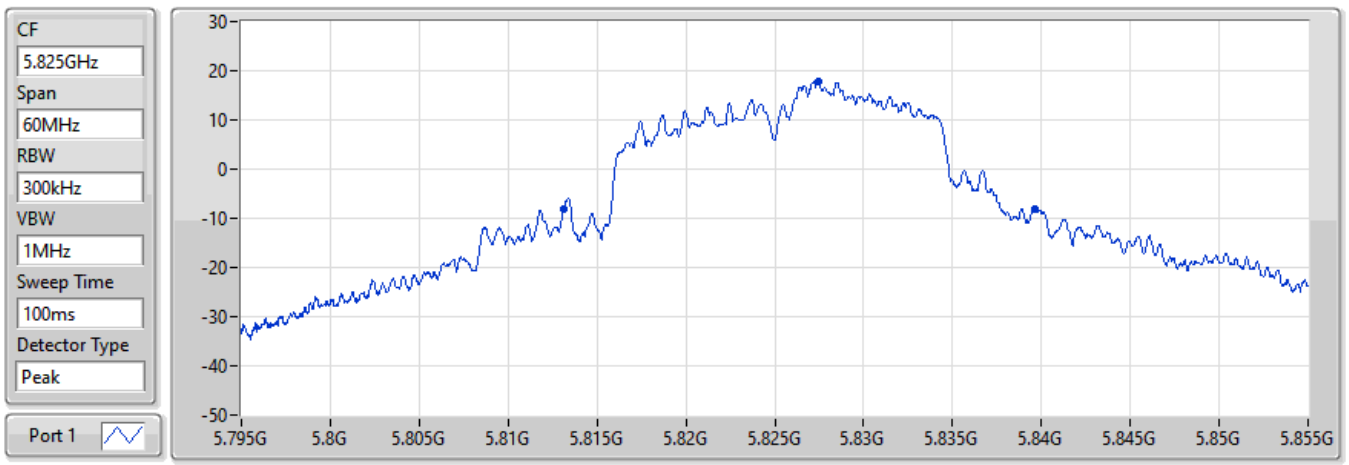

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
26.55M	5.81309G	5.83964G	Inf	1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.35M	18.081M	18M1D1D	19.17M	17.361M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.32M	17.781M	17M8D1D	19.2M	17.601M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.32M	17.751M	17M8D1D	15.21M	14.573M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	15.72M	17.931M	17M9D1D	3.04M	3.798M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	19.35M	17.571M
5200MHz	Pass	Inf	19.17M	17.361M
5240MHz	Pass	Inf	19.29M	18.081M
5260MHz	Pass	Inf	19.26M	17.601M
5300MHz	Pass	Inf	19.2M	17.781M
5320MHz	Pass	Inf	19.32M	17.751M
5500MHz	Pass	Inf	19.29M	17.751M
5580MHz	Pass	Inf	19.32M	17.691M
5700MHz	Pass	Inf	19.23M	17.661M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.21M	14.573M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.04M	3.798M
5745MHz	Pass	500k	14.46M	17.751M
5785MHz	Pass	500k	14.46M	17.901M
5825MHz	Pass	500k	15.72M	17.931M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5180MHz

21/05/2022

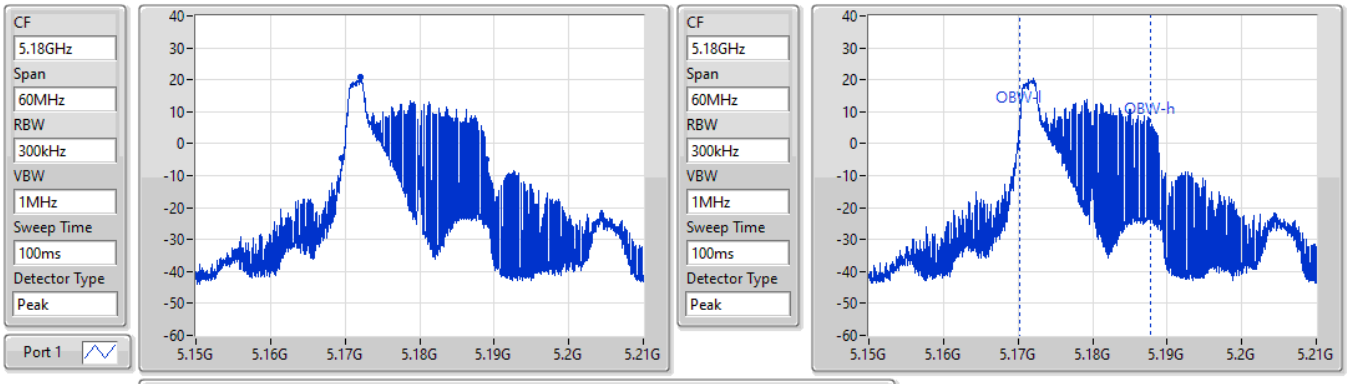


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.35M	5.16959G	5.18894G	17.571M	5.170255G	5.187826G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5200MHz

21/05/2022

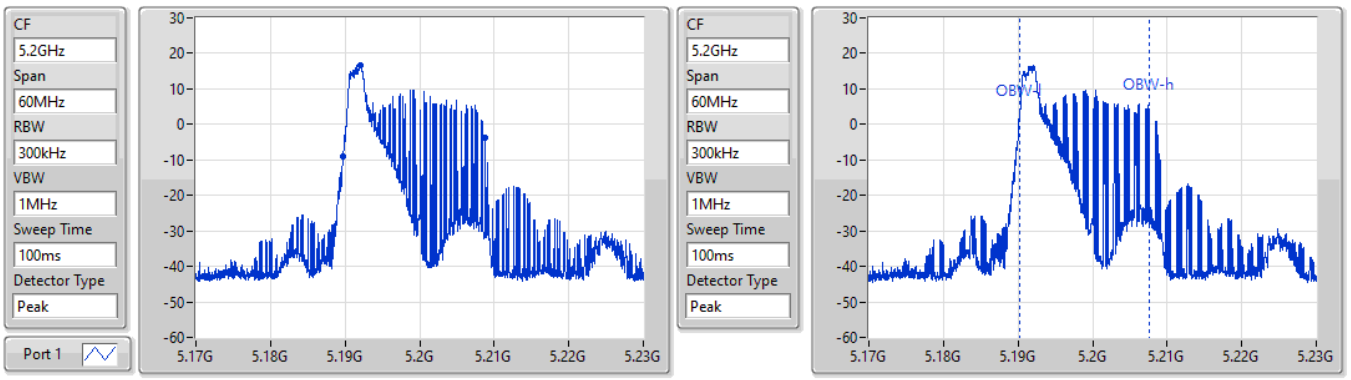


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.18968G	5.20885G	17.361M	5.190255G	5.207616G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5240MHz

21/05/2022

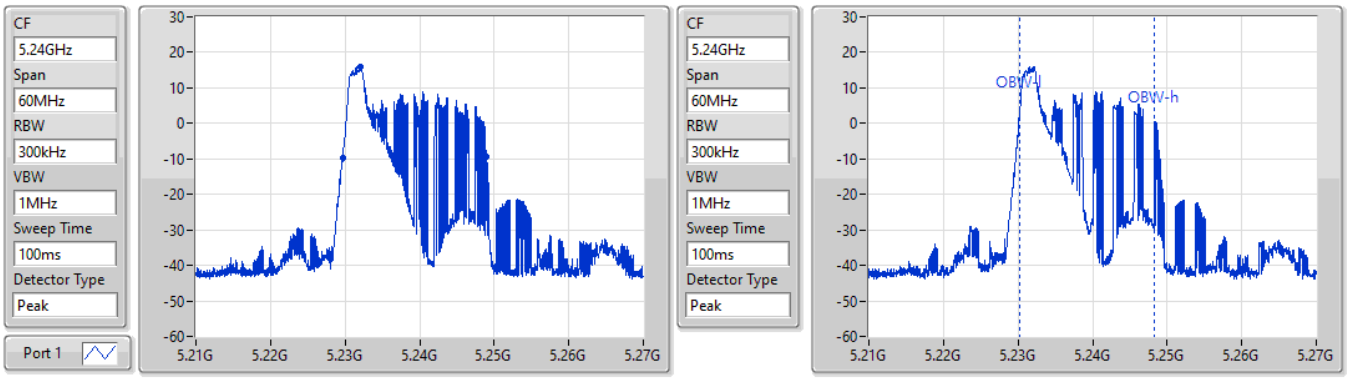


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.29M	5.22968G	5.24897G	18.081M	5.230255G	5.248336G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5260MHz


21/05/2022

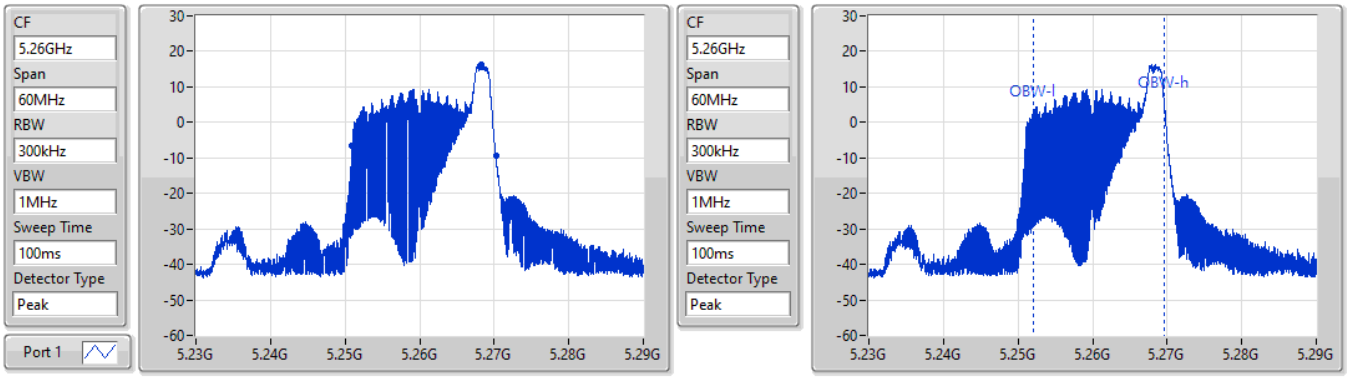

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.26M	5.25097G	5.27023G	17.601M	5.252054G	5.269655G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5300MHz

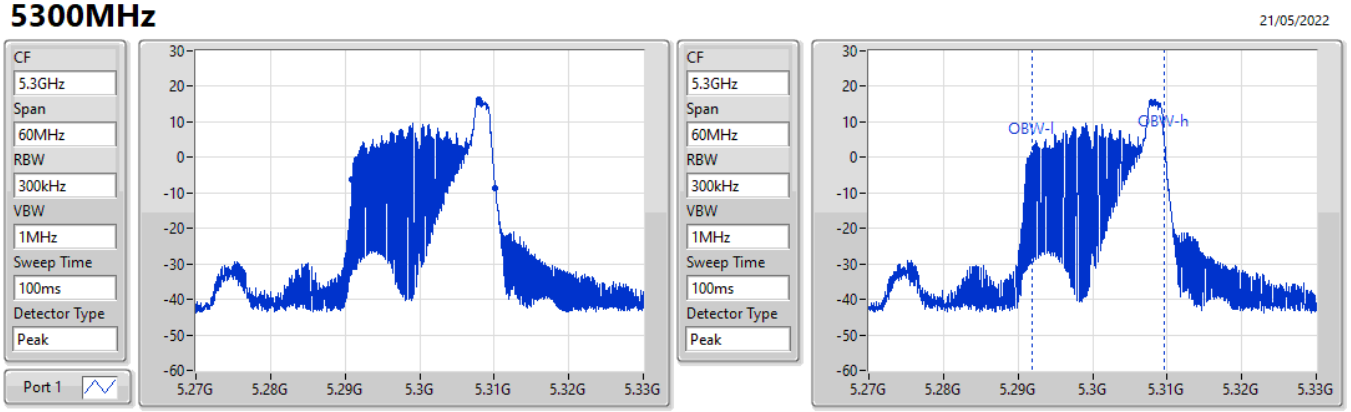

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.2M	5.29097G	5.31017G	17.781M	5.291874G	5.309655G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5320MHz

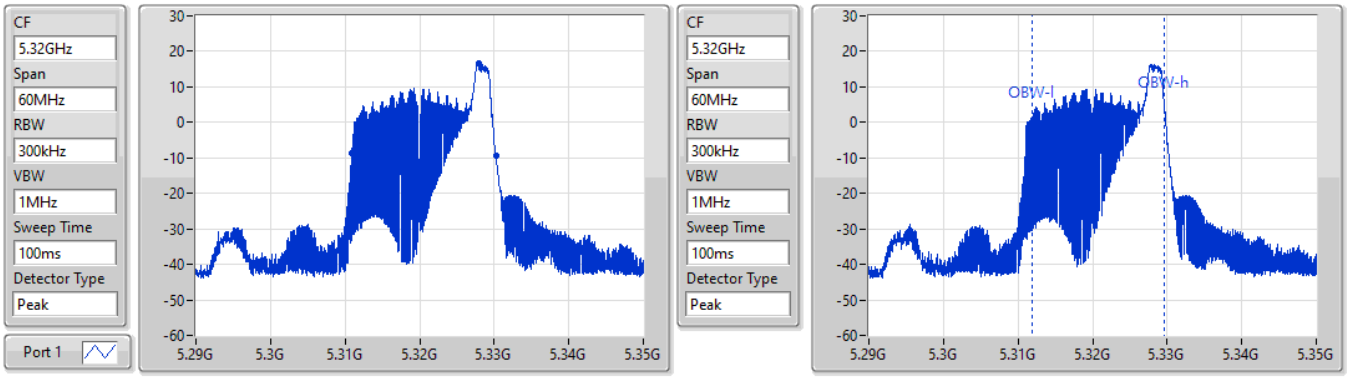


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.32M	5.31091G	5.33023G	17.751M	5.311904G	5.329655G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5500MHz

21/05/2022

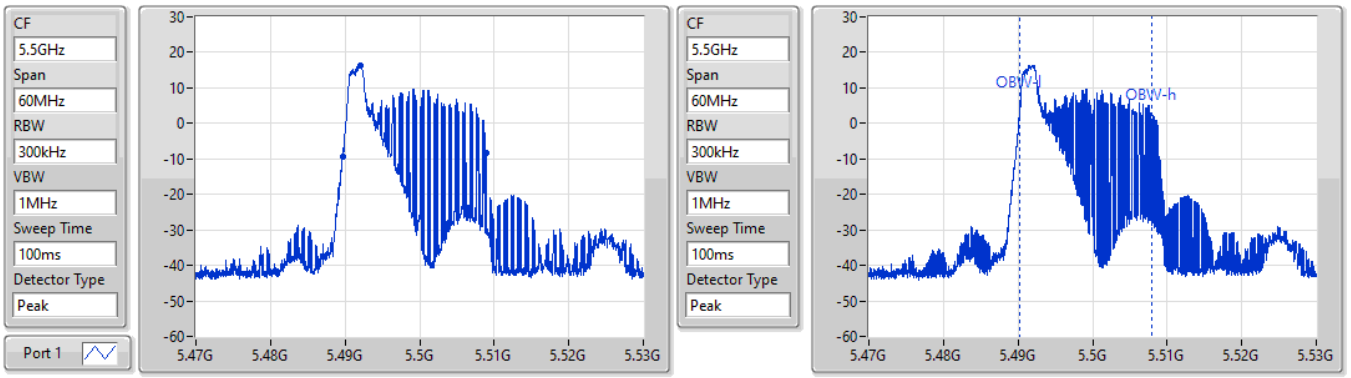


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.29M	5.48965G	5.50894G	17.751M	5.490255G	5.508006G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5580MHz

21/05/2022

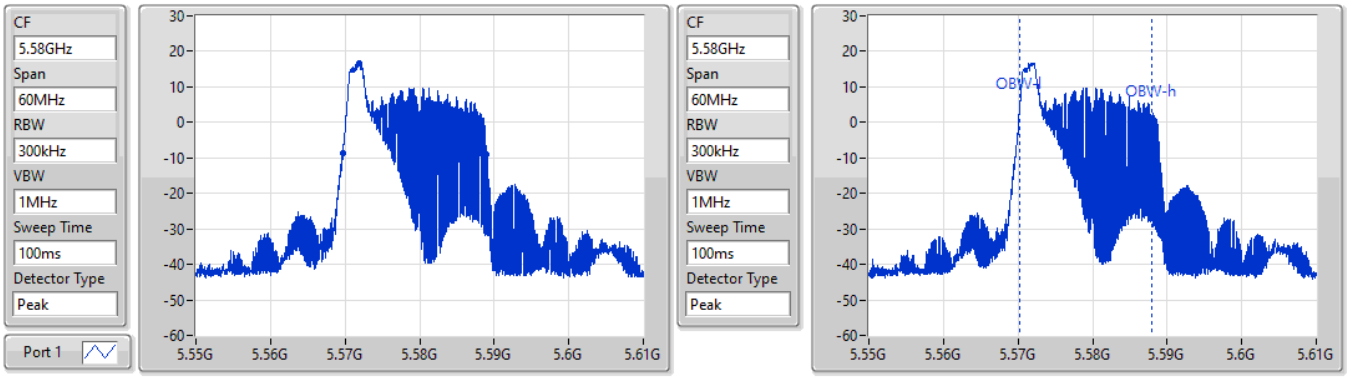


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.32M	5.56968G	5.589G	17.691M	5.570255G	5.587946G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5700MHz

21/05/2022

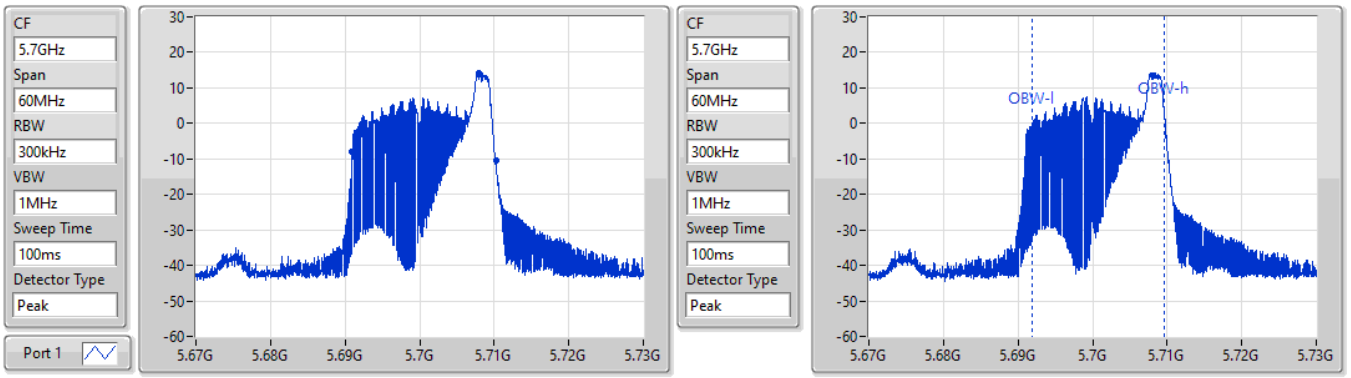


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.23M	5.69097G	5.7102G	17.661M	5.691964G	5.709625G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.47-5.725GHz

03/06/2022

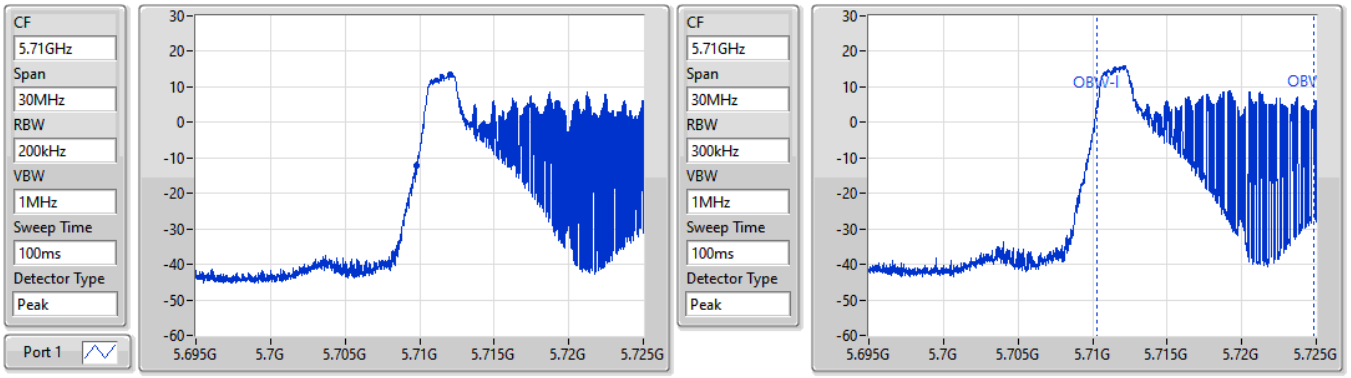


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.21M	5.709775G	5.724985G	14.573M	5.71027G	5.724843G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz

03/06/2022

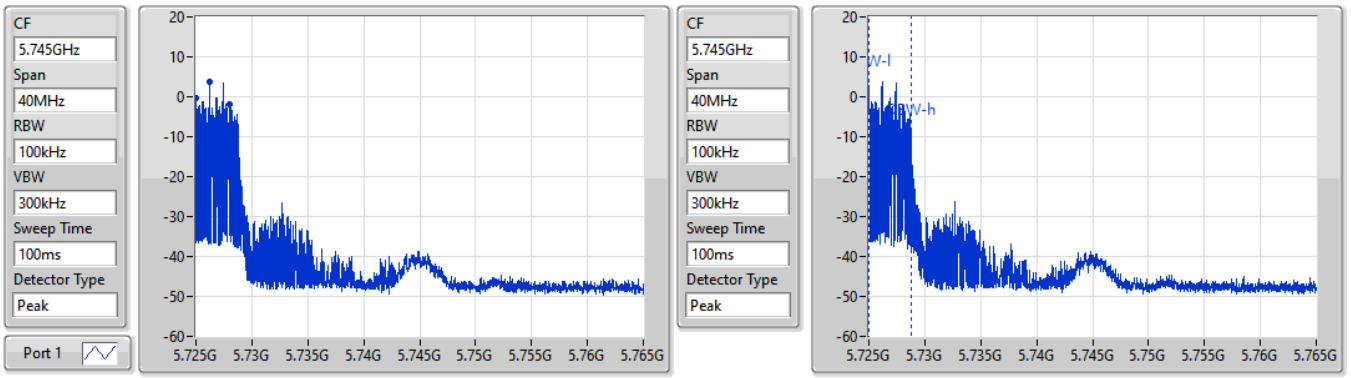


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.04M	5.72502G	5.72806G	3.798M	5.72501G	5.728808G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz

03/06/2022

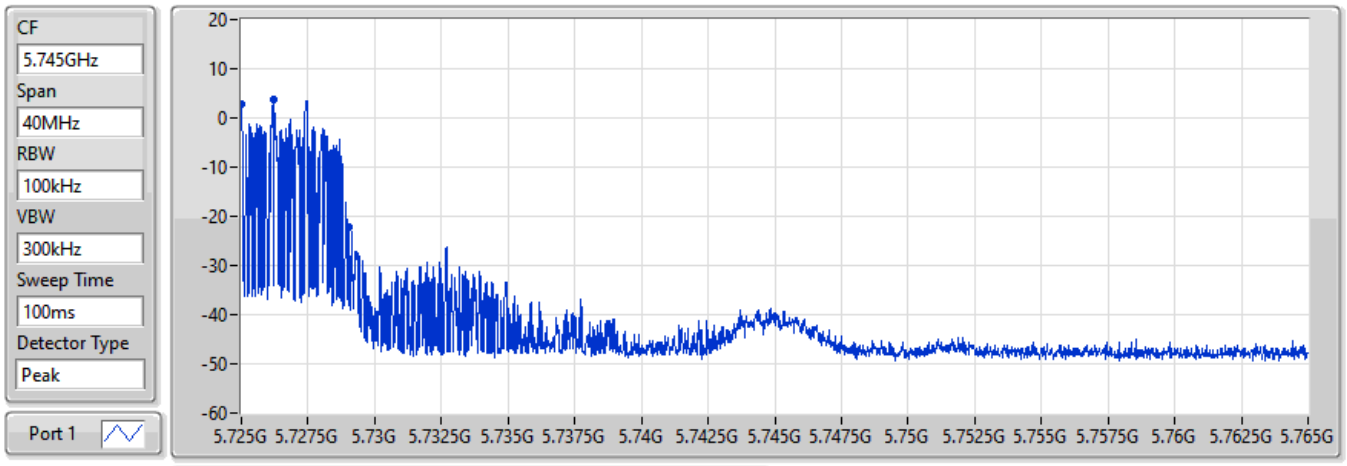


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
4.02M	5.725G	5.72902G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5745MHz

03/06/2022

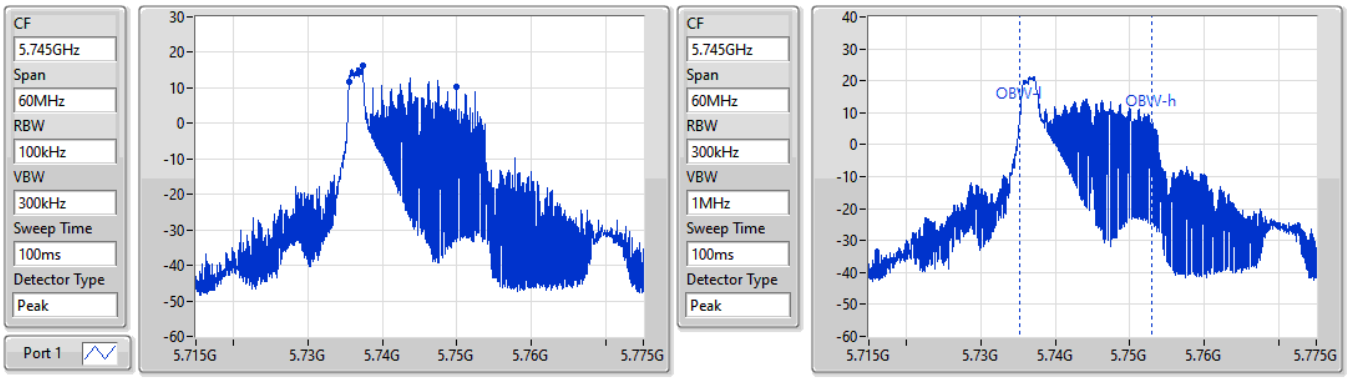


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.46M	5.73552G	5.74998G	17.751M	5.735225G	5.752976G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5745MHz

03/06/2022

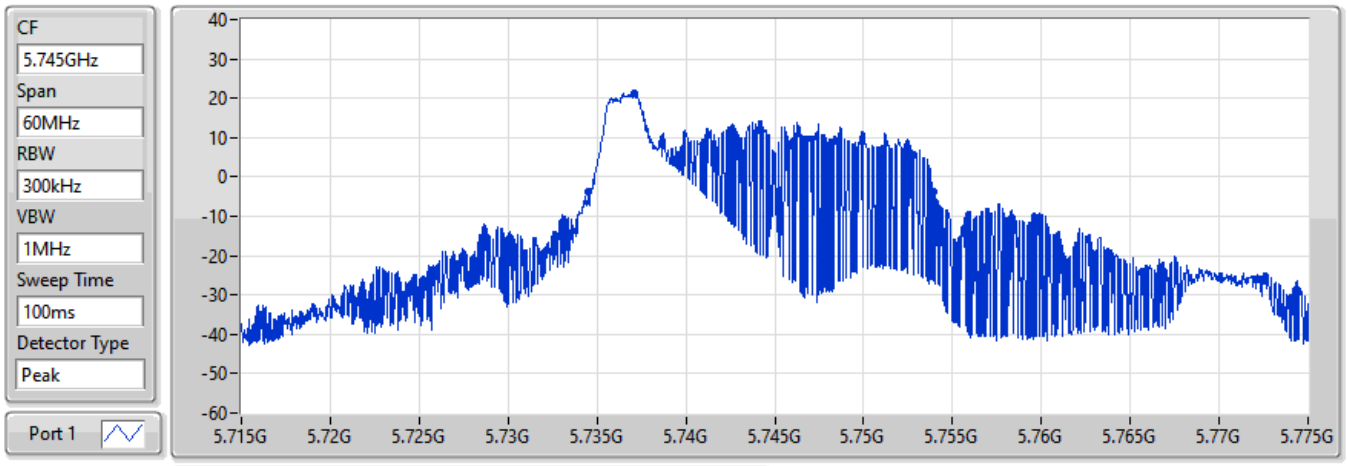


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.41M	5.7345G	5.75391G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5785MHz

03/06/2022

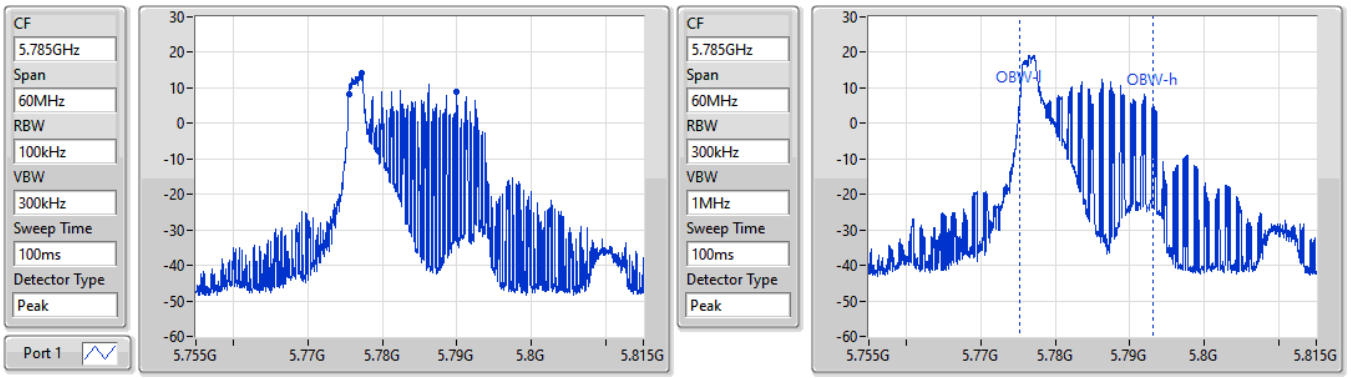


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.46M	5.77549G	5.78995G	17.901M	5.775255G	5.793156G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5785MHz


03/06/2022

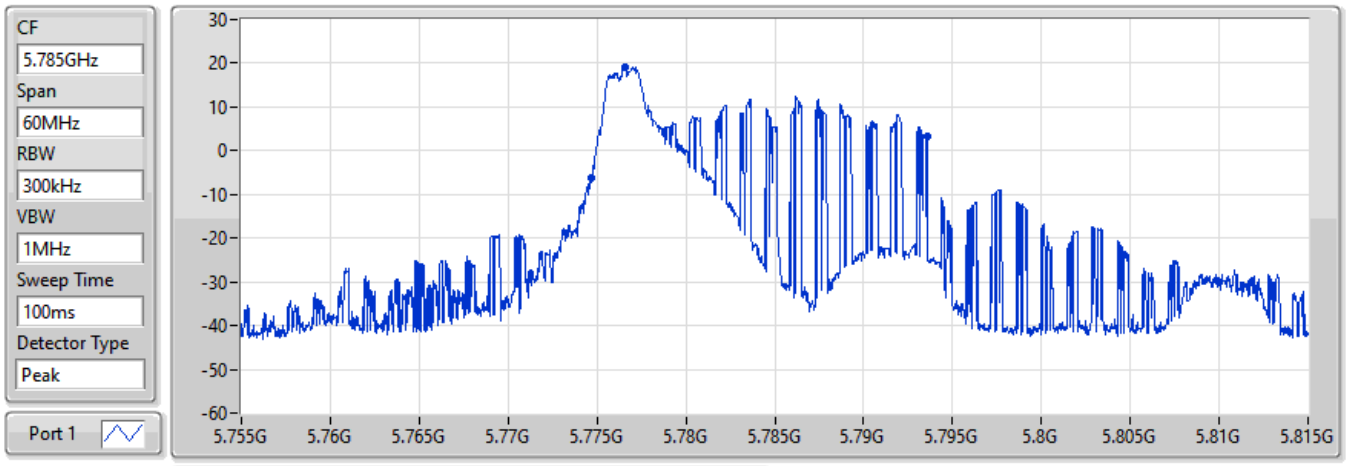

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
18.87M	5.77468G	5.79355G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**


5825MHz

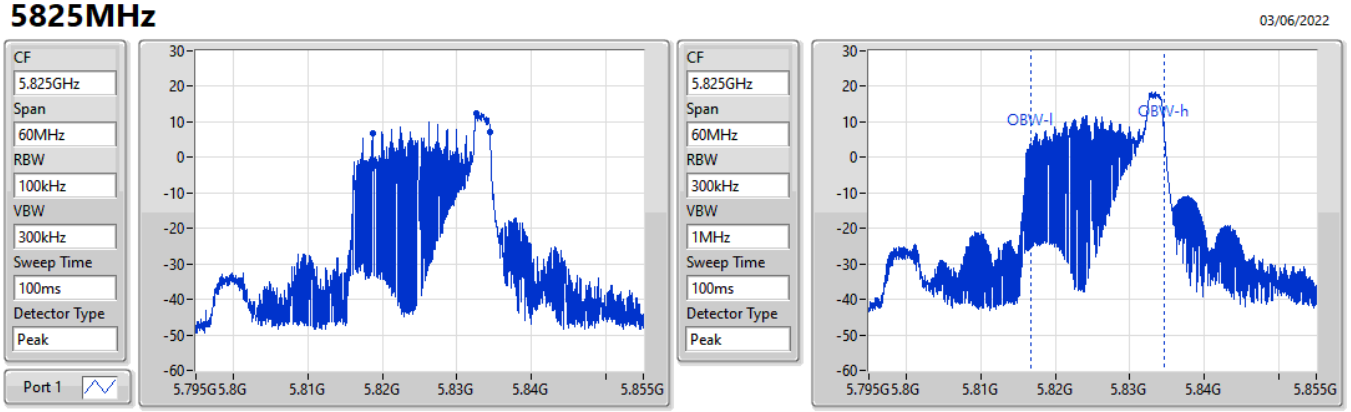

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.72M	5.8187G	5.83442G	17.931M	5.816724G	5.834655G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5825MHz

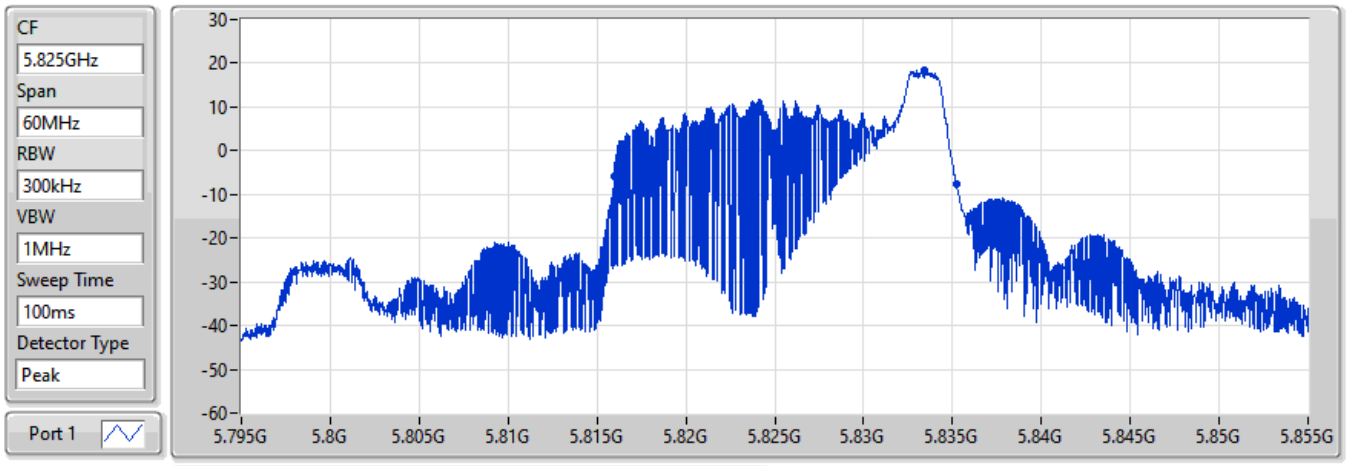

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.26M	5.81594G	5.8352G	Inf	1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.77M	17.811M	17M8D1D	19.08M	17.781M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.17M	17.871M	17M9D1D	19.17M	17.841M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.17M	17.841M	17M8D1D	14.91M	14.408M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	16.98M	18.291M	18M3D1D	2.52M	3.878M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	19.08M	17.781M
5200MHz	Pass	Inf	19.77M	17.811M
5240MHz	Pass	Inf	19.11M	17.811M
5260MHz	Pass	Inf	19.17M	17.841M
5300MHz	Pass	Inf	19.17M	17.841M
5320MHz	Pass	Inf	19.17M	17.871M
5500MHz	Pass	Inf	19.08M	17.781M
5580MHz	Pass	Inf	19.08M	17.781M
5700MHz	Pass	Inf	19.17M	17.841M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	14.91M	14.408M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.52M	3.878M
5745MHz	Pass	500k	16.98M	17.781M
5785MHz	Pass	500k	16.98M	18.291M
5825MHz	Pass	500k	15.72M	18.261M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5180MHz

21/05/2022

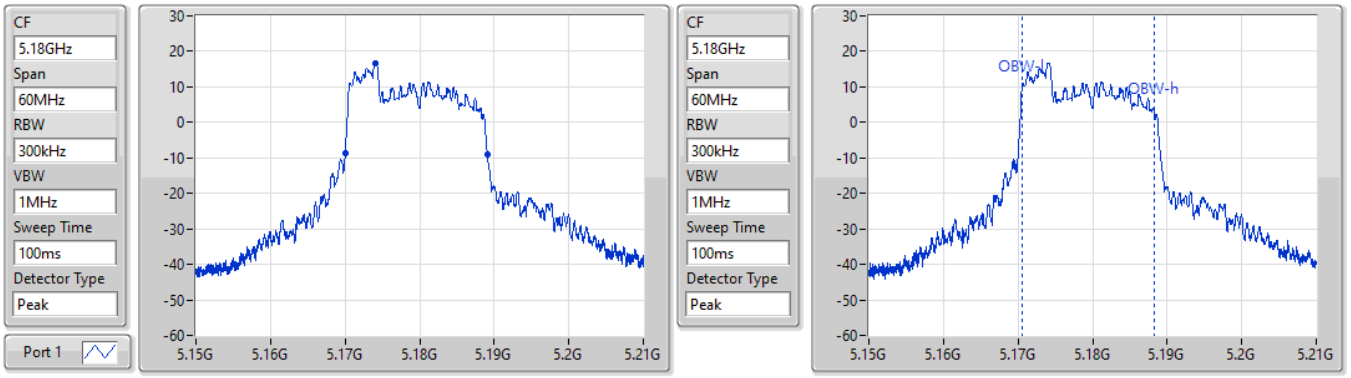


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.17001G	5.18909G	17.781M	5.170495G	5.188276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5200MHz

21/05/2022

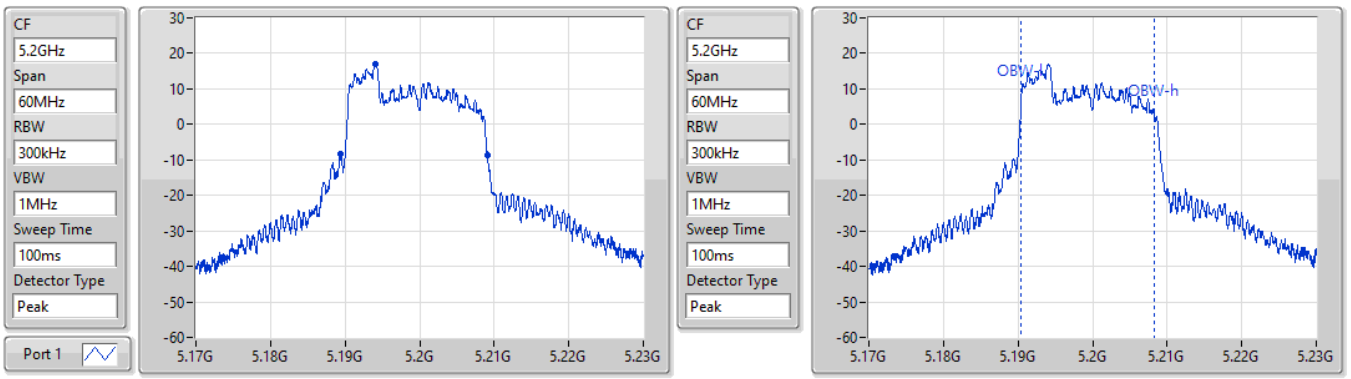


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.77M	5.18932G	5.20909G	17.811M	5.190465G	5.208276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5240MHz

21/05/2022

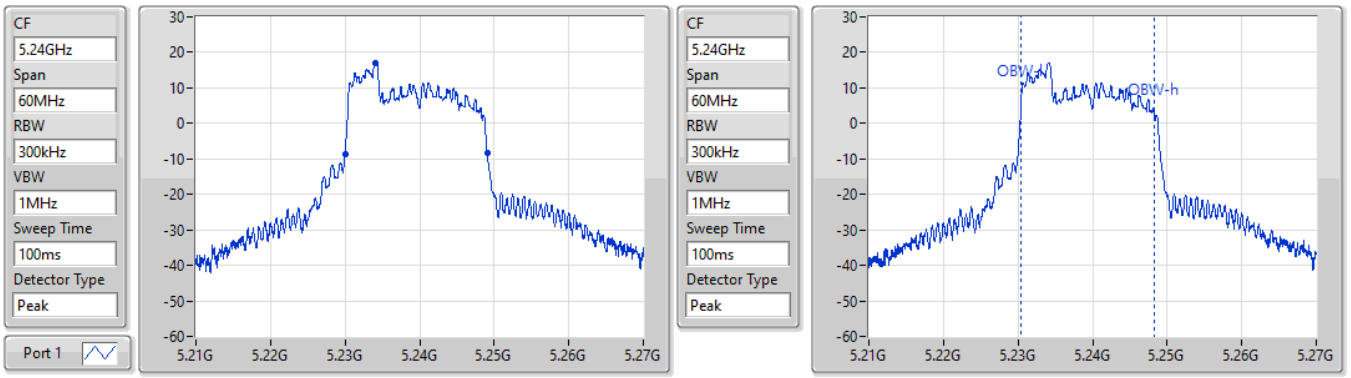


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.22998G	5.24909G	17.811M	5.230465G	5.248276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5260MHz

21/05/2022

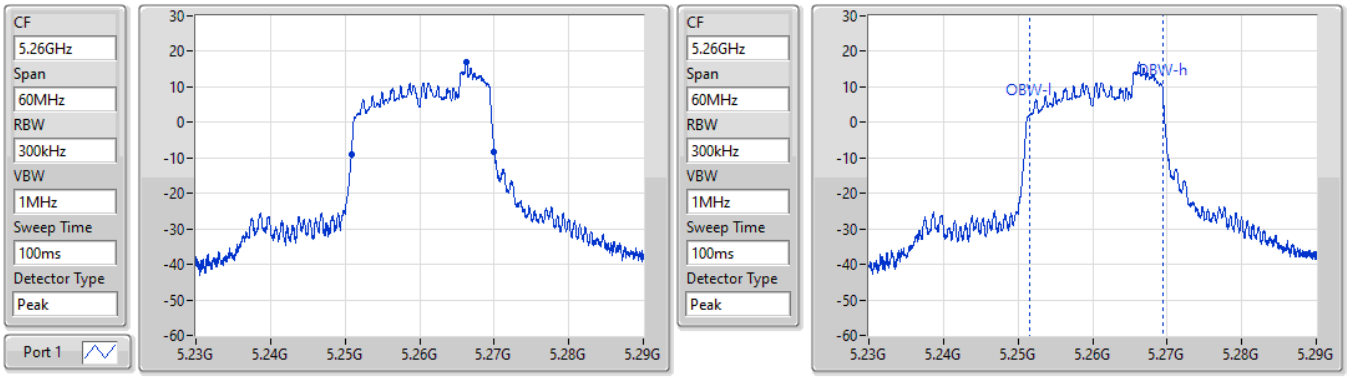


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.25085G	5.27002G	17.841M	5.251604G	5.269445G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5300MHz

21/05/2022

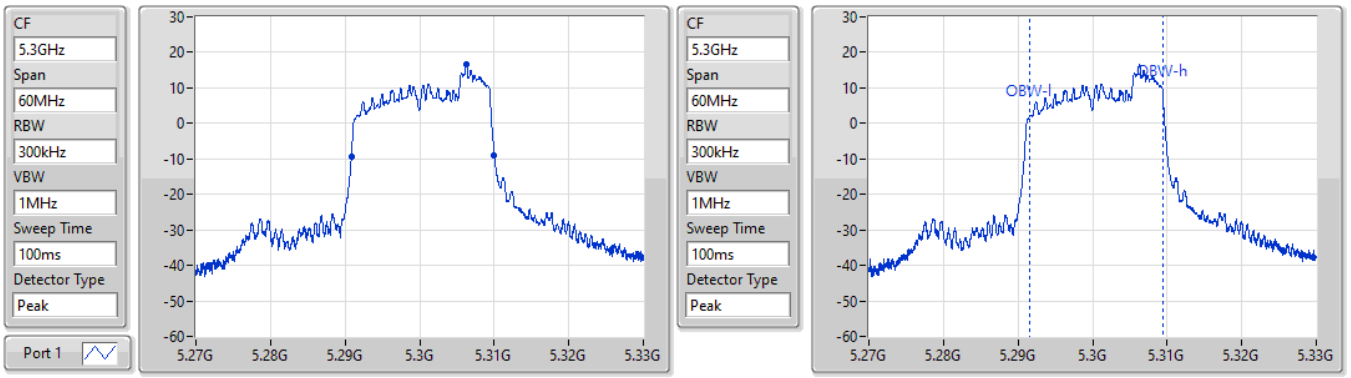


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.29085G	5.31002G	17.841M	5.291604G	5.309445G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5320MHz


21/05/2022

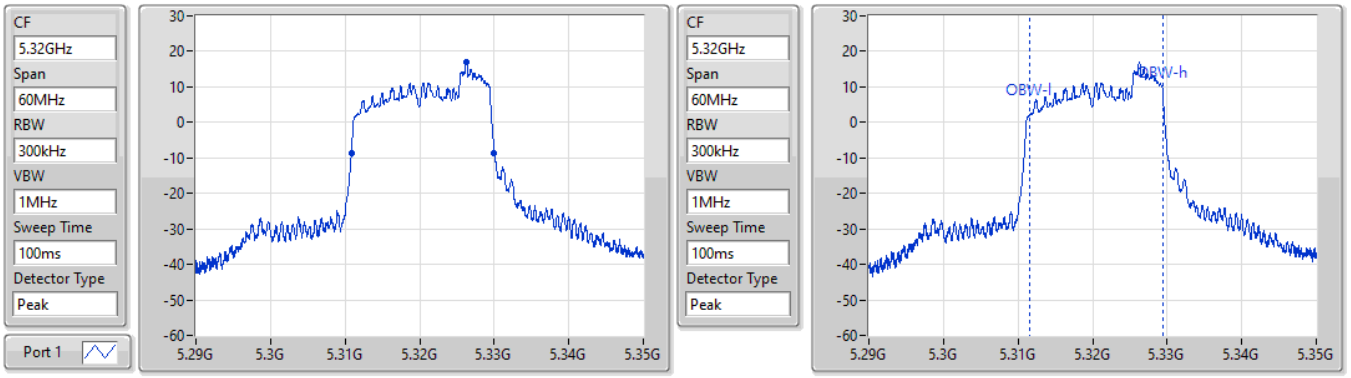

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.31085G	5.33002G	17.871M	5.311574G	5.329445G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5500MHz

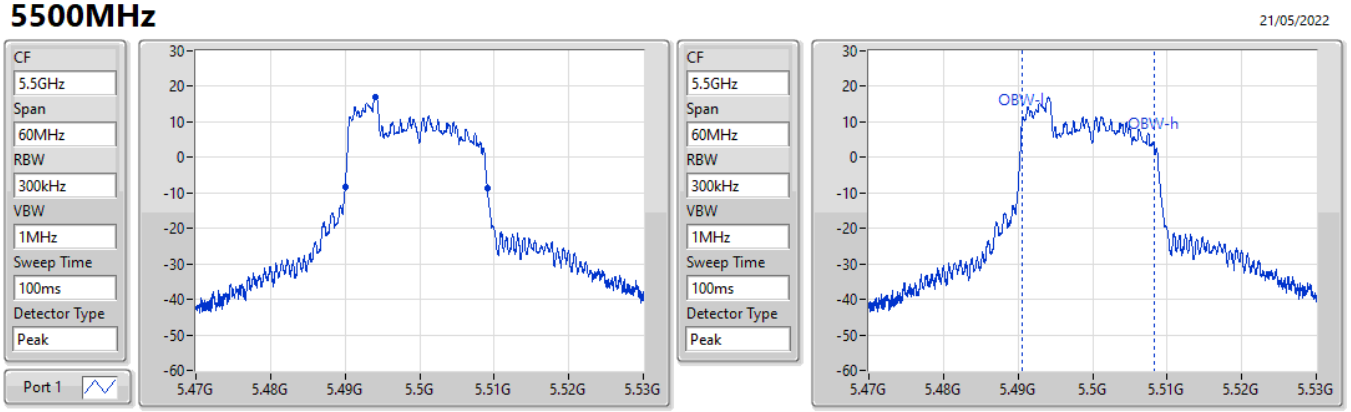

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.49001G	5.50909G	17.781M	5.490495G	5.508276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5580MHz

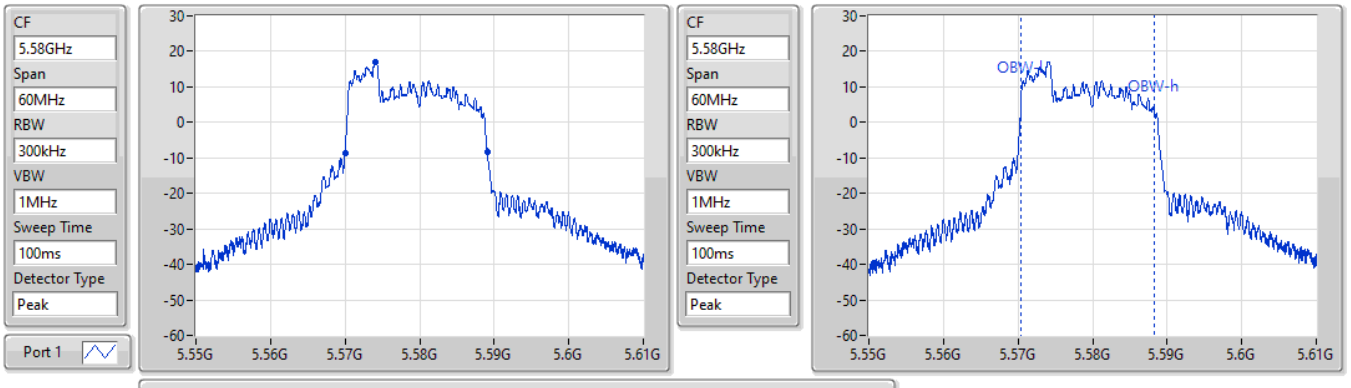


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.56998G	5.58906G	17.781M	5.570465G	5.588246G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5700MHz

21/05/2022

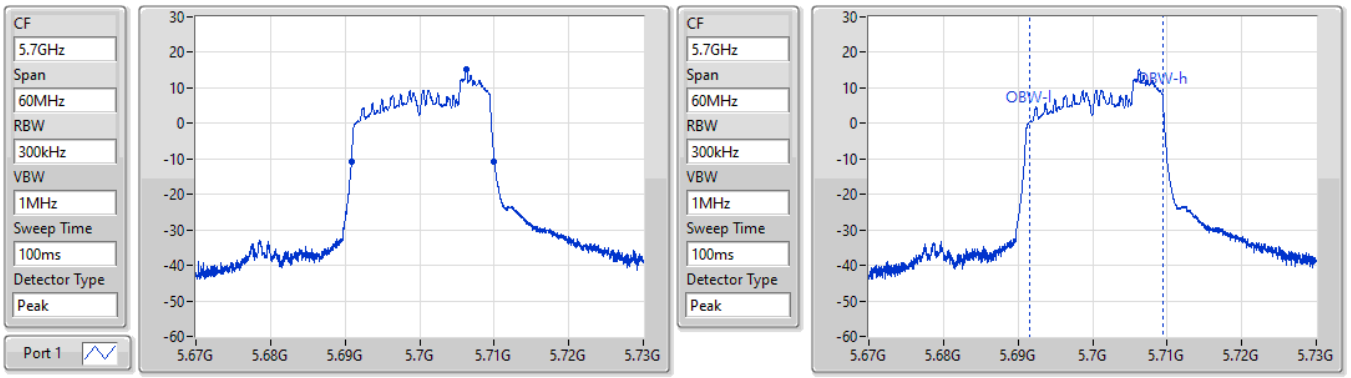


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.69085G	5.71002G	17.841M	5.691604G	5.709445G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.47-5.725GHz

03/06/2022

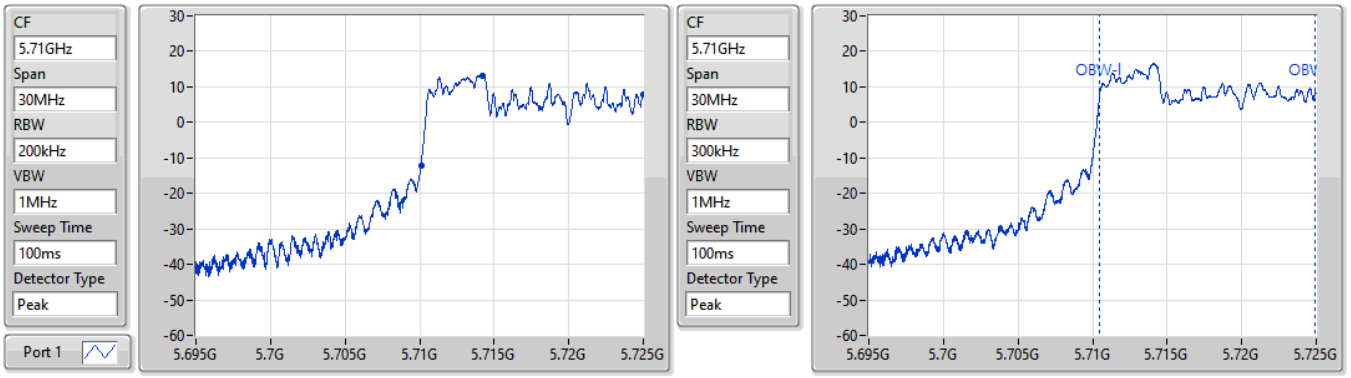


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.91M	5.71009G	5.725G	14.408M	5.71048G	5.724888G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.725-5.85GHz

03/06/2022

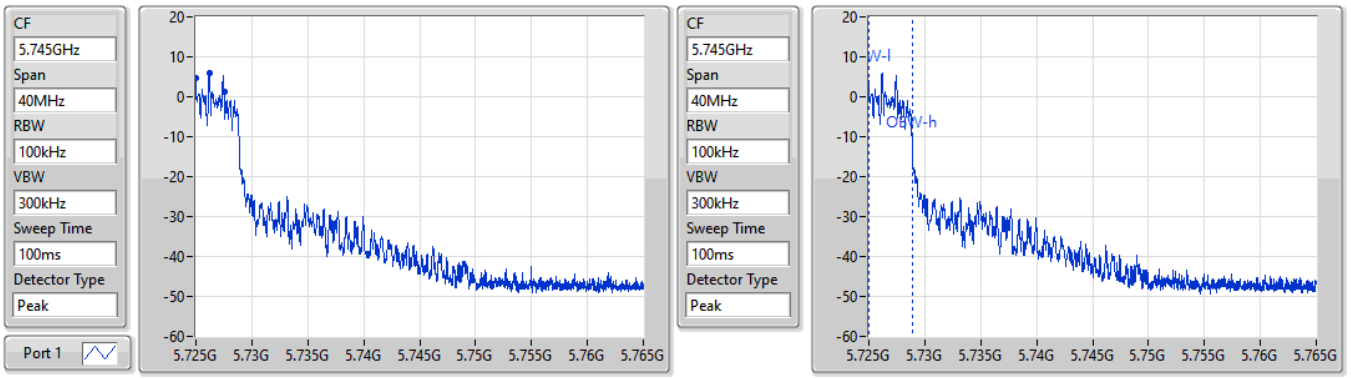


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.52M	5.725G	5.72752G	3.878M	5.72501G	5.728888G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.725-5.85GHz


03/06/2022

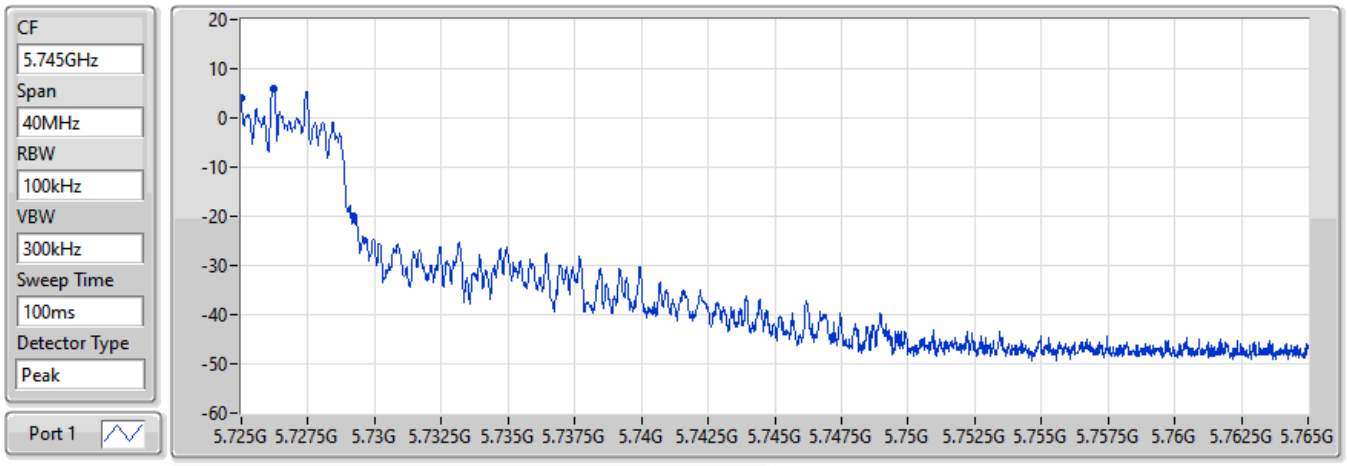

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
4.2M	5.725G	5.7292G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5745MHz

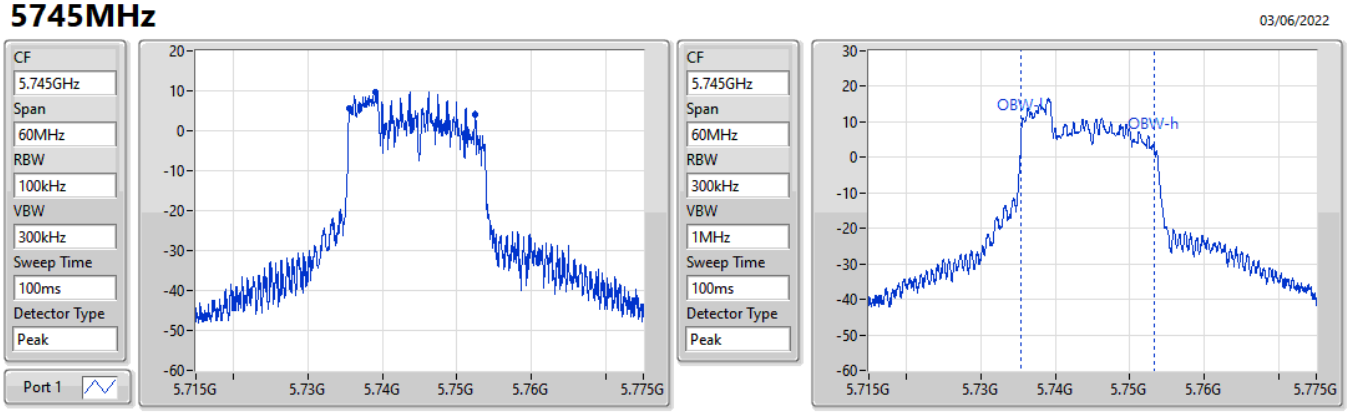

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.98M	5.73552G	5.7525G	17.781M	5.735465G	5.753246G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5745MHz

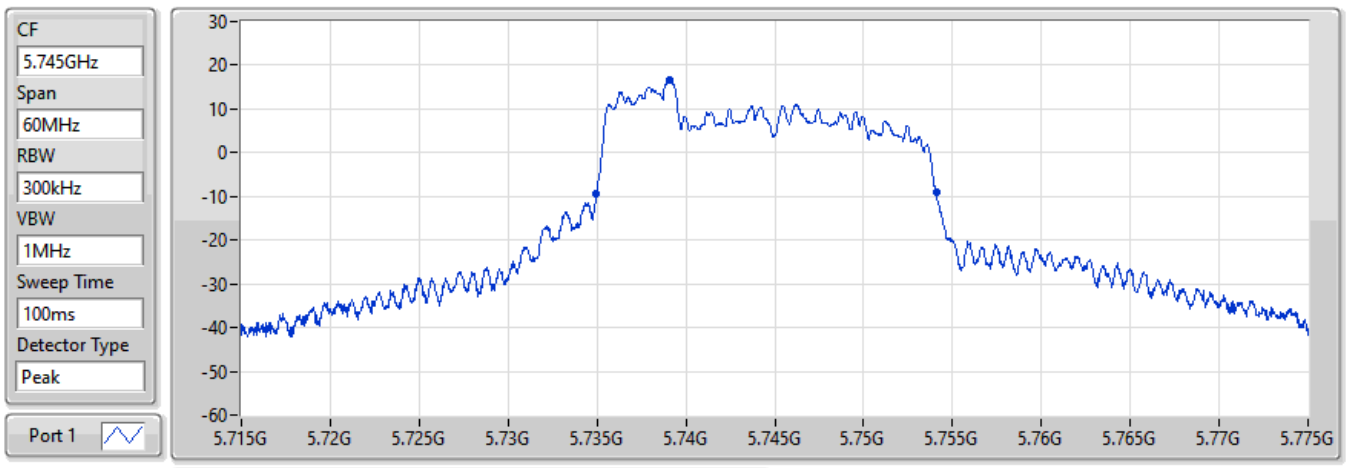


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.11M	5.73498G	5.75409G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5785MHz

03/06/2022

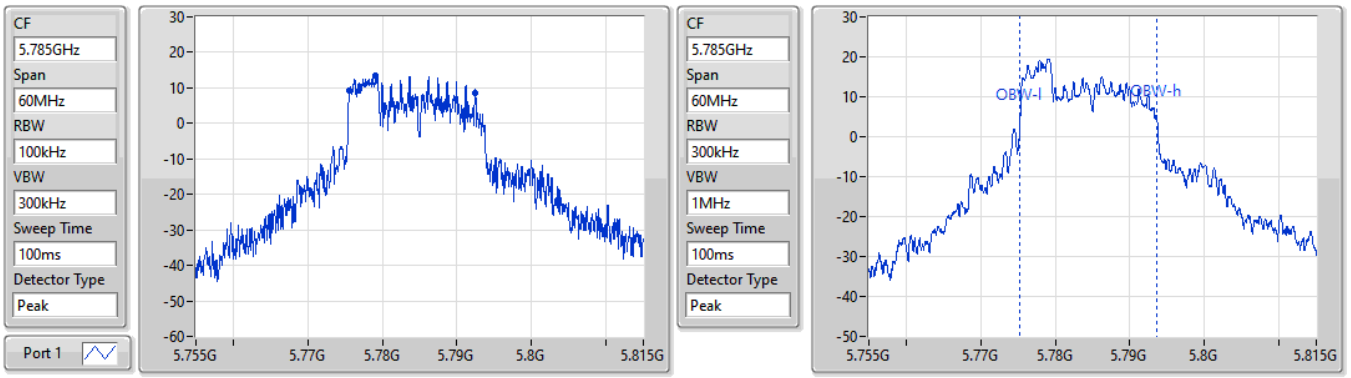


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.98M	5.77552G	5.7925G	18.291M	5.775285G	5.793576G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5785MHz

03/06/2022

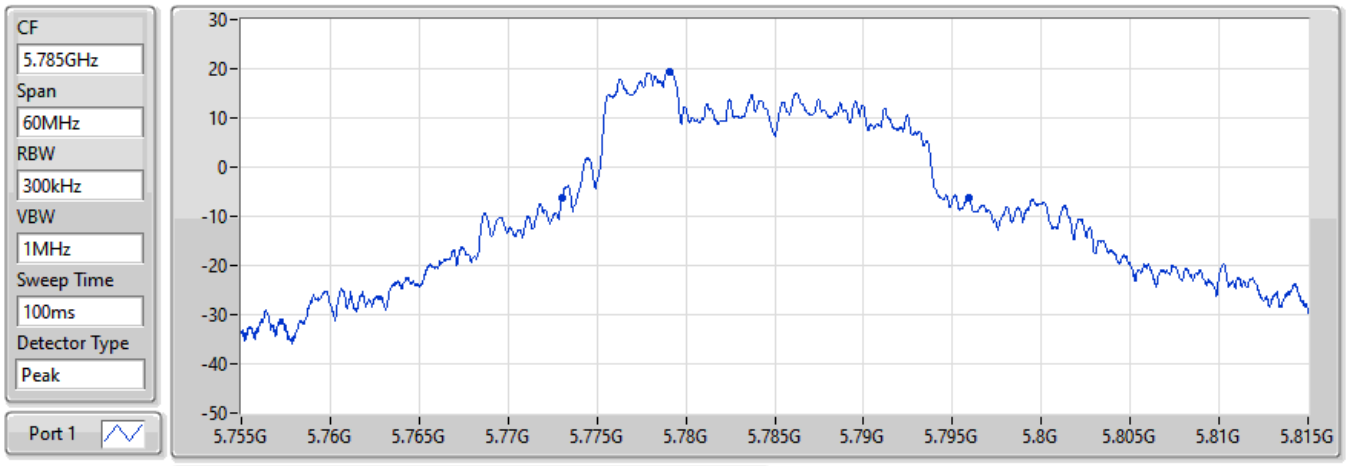


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
22.92M	5.77303G	5.79595G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5825MHz

03/06/2022

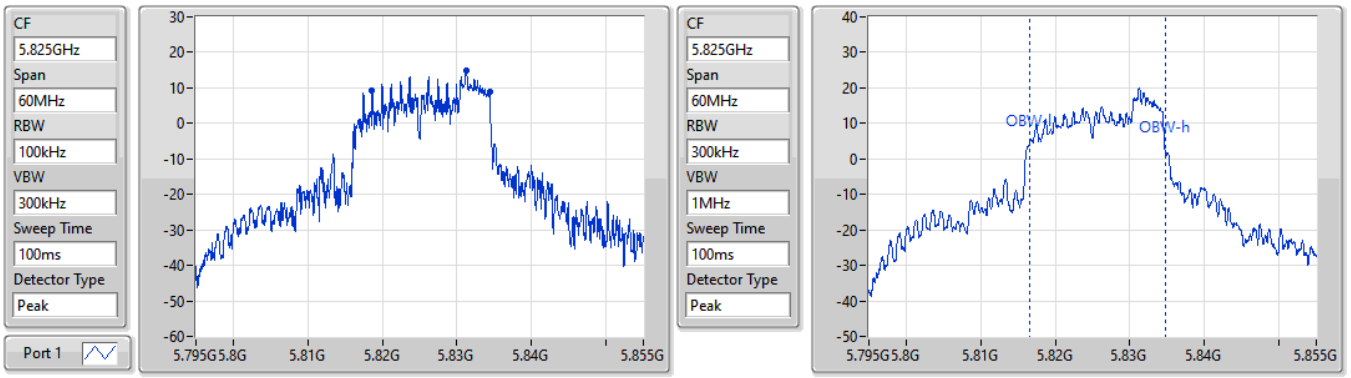


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.72M	5.81864G	5.83436G	18.261M	5.816484G	5.834745G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5825MHz

03/06/2022

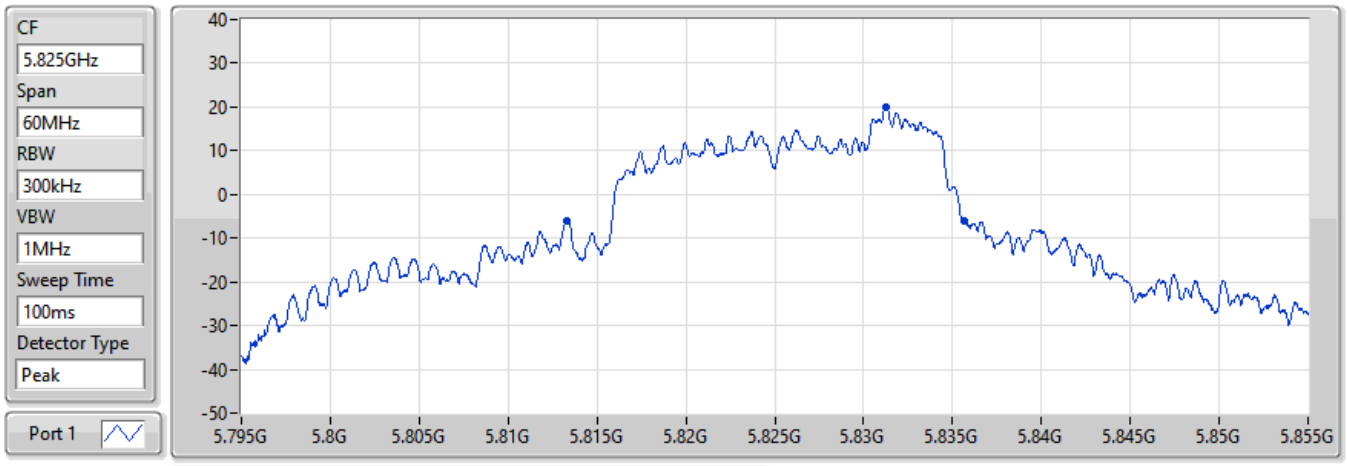

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
22.29M	5.81333G	5.83562G	Inf	1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	21.51M	17.811M	17M8D1D	19.53M	17.781M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	20.16M	17.781M	17M8D1D	19.95M	17.751M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.95M	17.781M	17M8D1D	14.835M	14.378M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	16.98M	19.13M	19M1D1D	2.52M	3.938M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	21.51M	17.811M
5200MHz	Pass	Inf	19.56M	17.781M
5240MHz	Pass	Inf	19.53M	17.781M
5260MHz	Pass	Inf	20.16M	17.751M
5300MHz	Pass	Inf	20.16M	17.751M
5320MHz	Pass	Inf	19.95M	17.781M
5500MHz	Pass	Inf	19.08M	17.781M
5580MHz	Pass	Inf	19.17M	17.751M
5700MHz	Pass	Inf	19.95M	17.751M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	14.835M	14.378M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.52M	3.938M
5745MHz	Pass	500k	16.98M	18.381M
5785MHz	Pass	500k	16.95M	18.351M
5825MHz	Pass	500k	15.06M	19.13M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5180MHz

01/06/2022

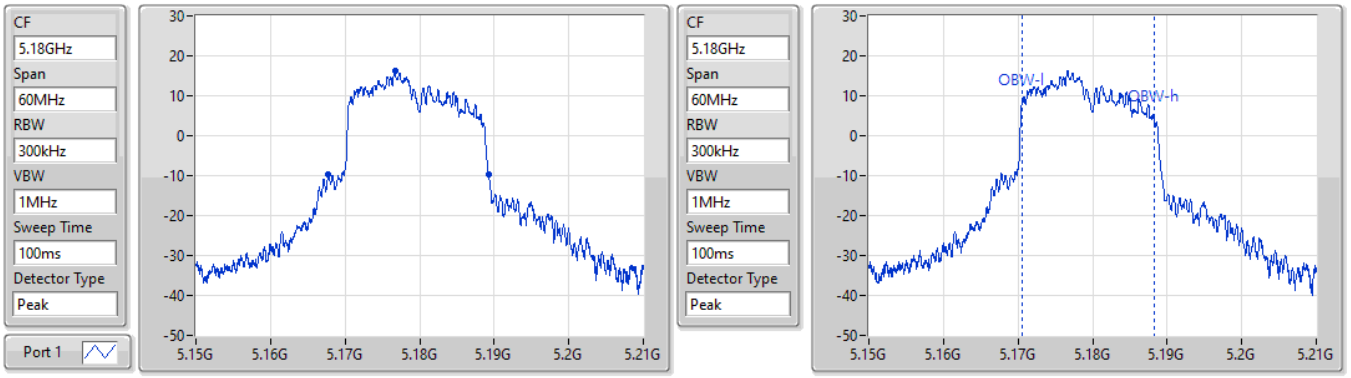


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
21.51M	5.16773G	5.18924G	17.811M	5.170495G	5.188306G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5200MHz


01/06/2022

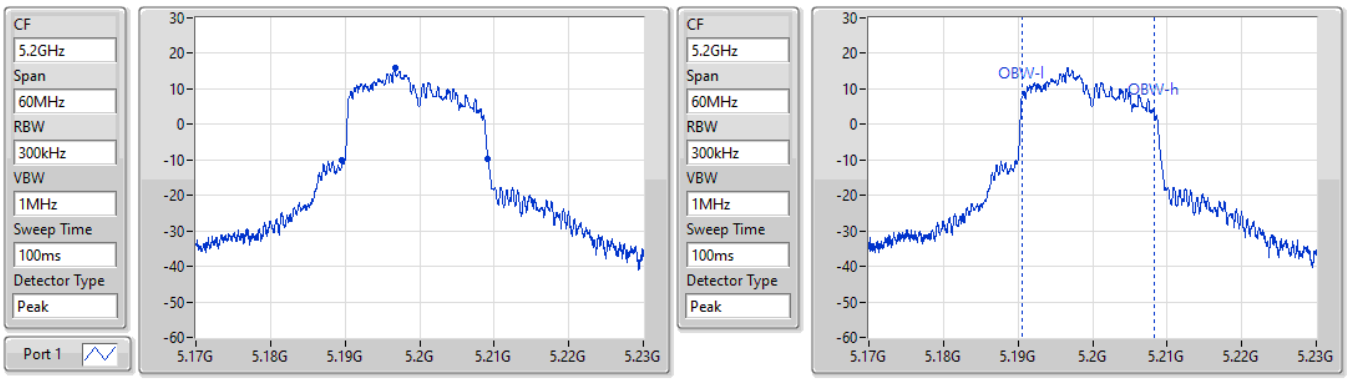

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.56M	5.18962G	5.20918G	17.781M	5.190495G	5.208276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5240MHz

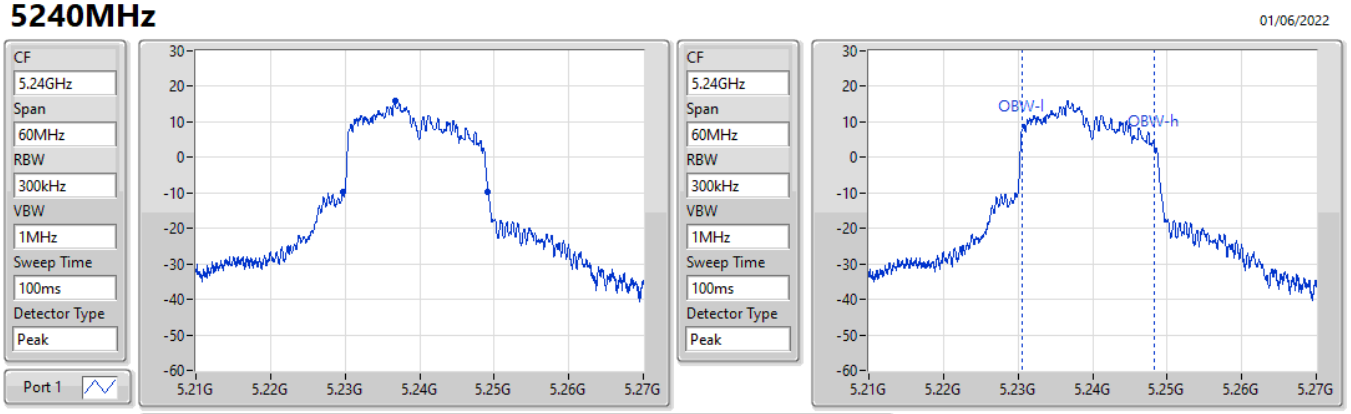

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.53M	5.22965G	5.24918G	17.781M	5.230495G	5.248276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5260MHz

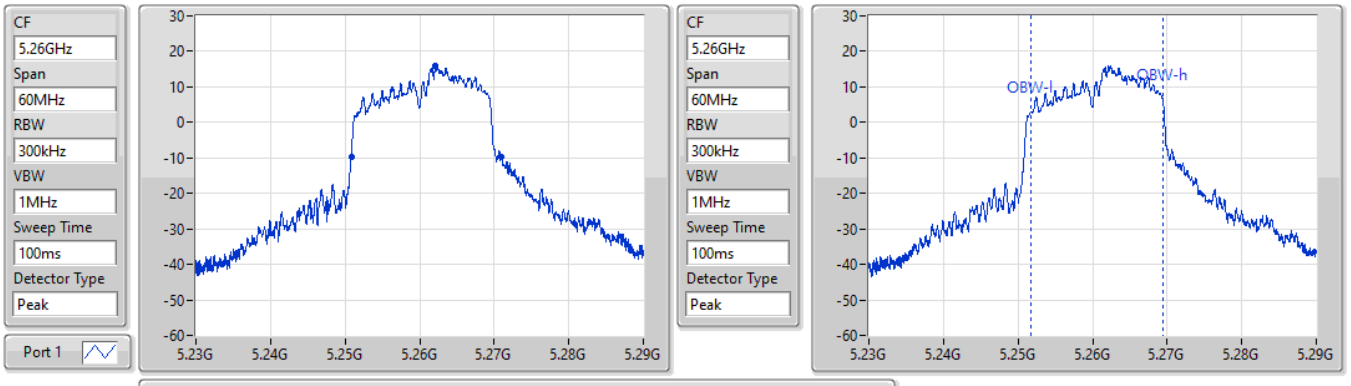

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.16M	5.25082G	5.27098G	17.751M	5.251664G	5.269415G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5300MHz

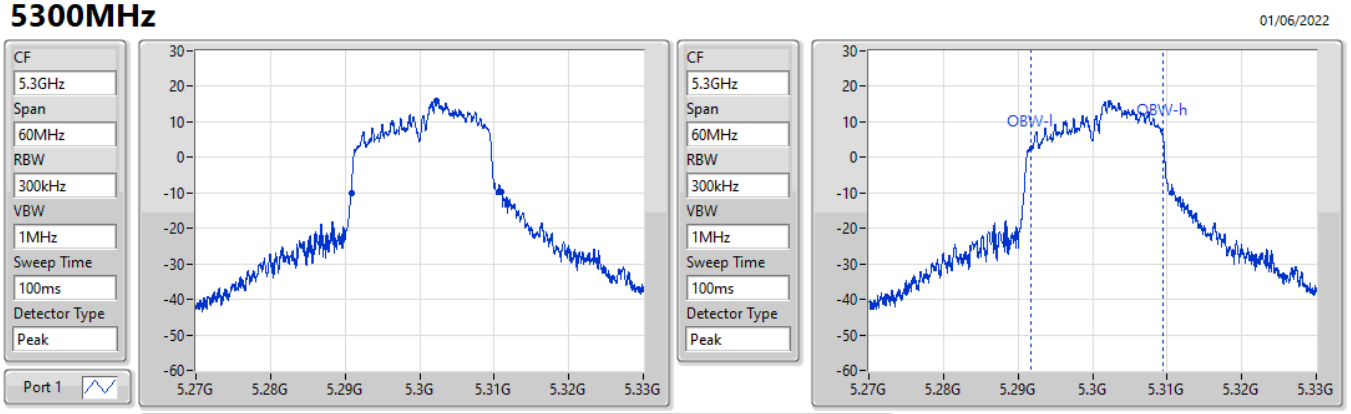

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.16M	5.29082G	5.31098G	17.751M	5.291664G	5.309415G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5320MHz

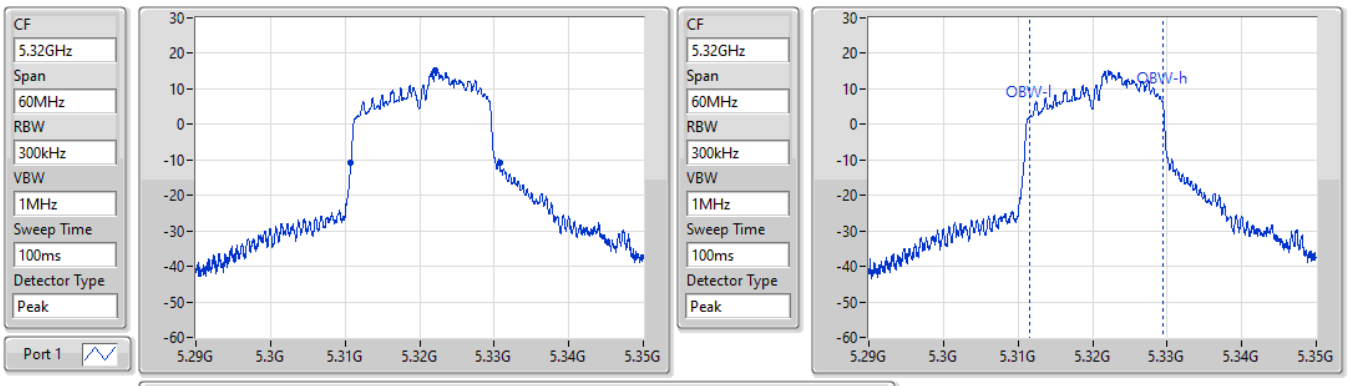

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.95M	5.31079G	5.33074G	17.781M	5.311634G	5.329415G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5500MHz

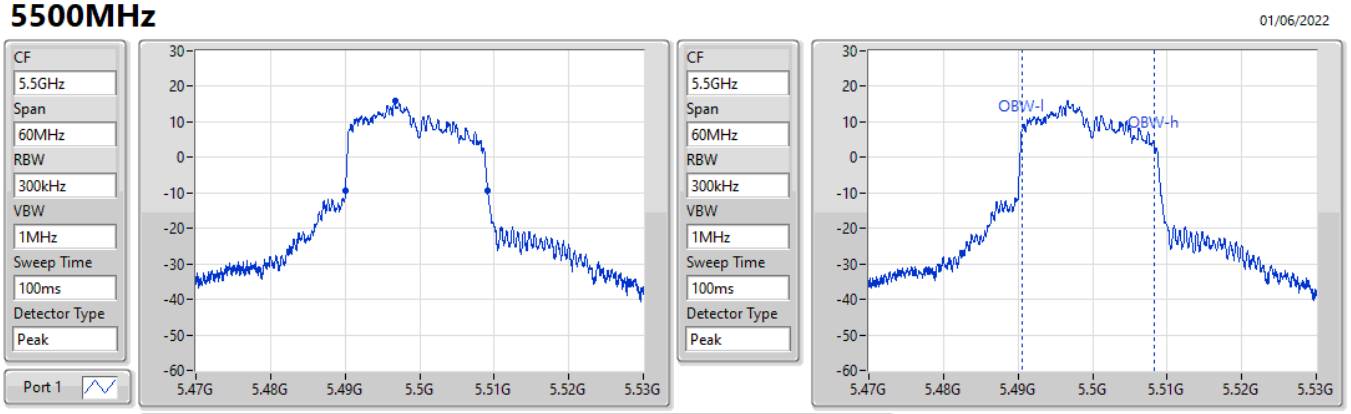

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.49007G	5.50915G	17.781M	5.490495G	5.508276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5580MHz

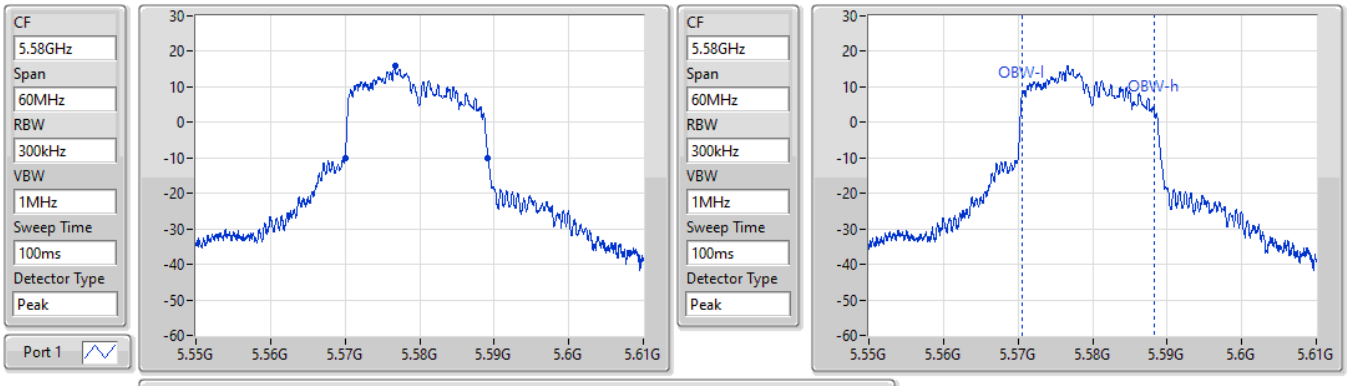


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.57001G	5.58918G	17.751M	5.570495G	5.588246G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5700MHz

01/06/2022

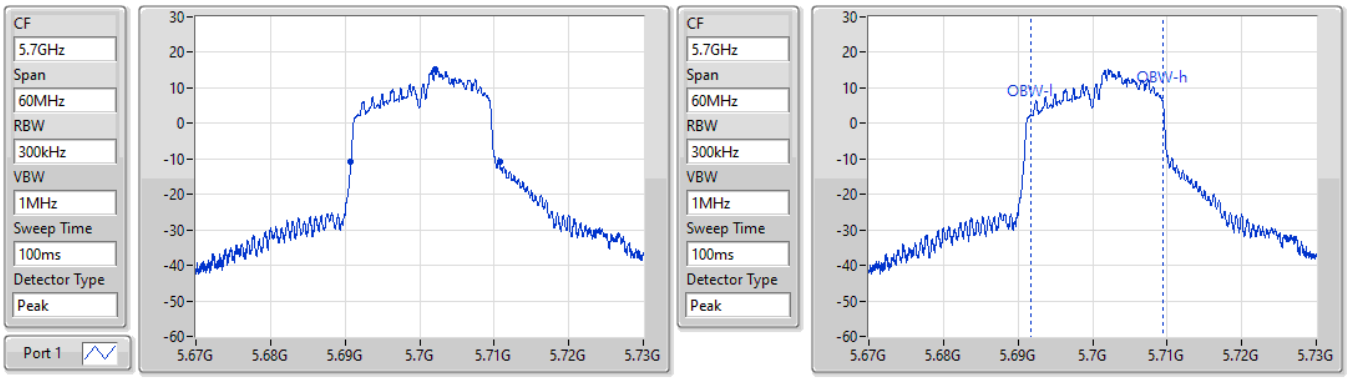


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.95M	5.69079G	5.71074G	17.751M	5.691664G	5.709415G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.47-5.725GHz

03/06/2022

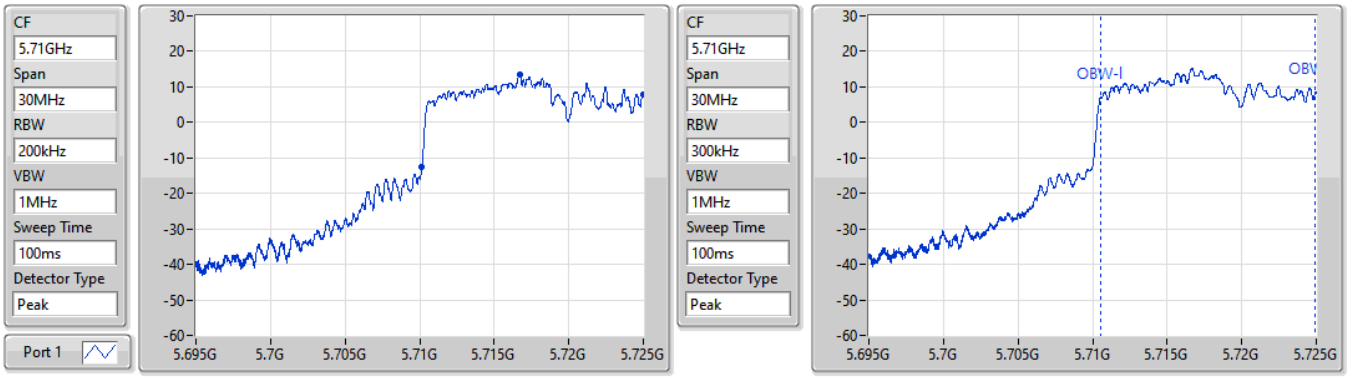


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.835M	5.710165G	5.725G	14.378M	5.71051G	5.724888G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.725-5.85GHz

04/06/2022

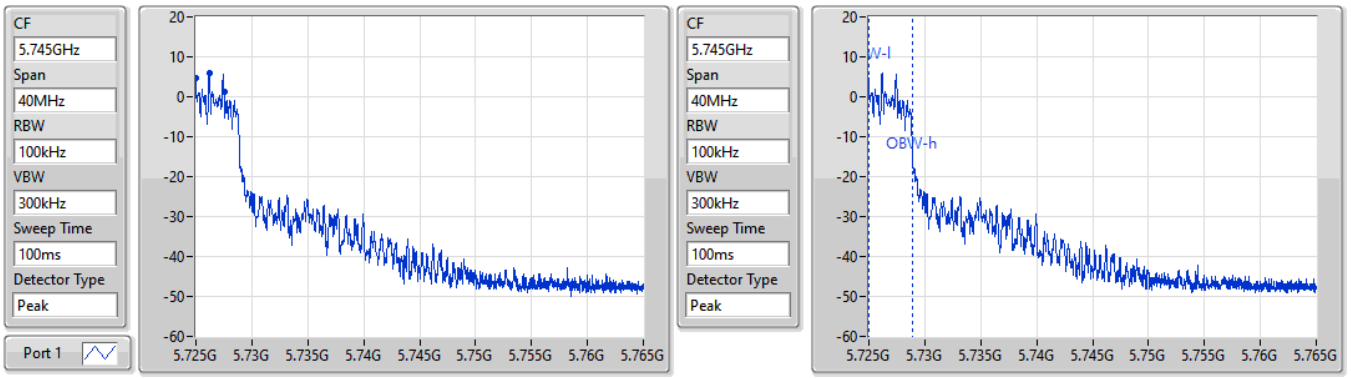


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.52M	5.725G	5.72752G	3.938M	5.72501G	5.728948G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.725-5.85GHz


04/06/2022

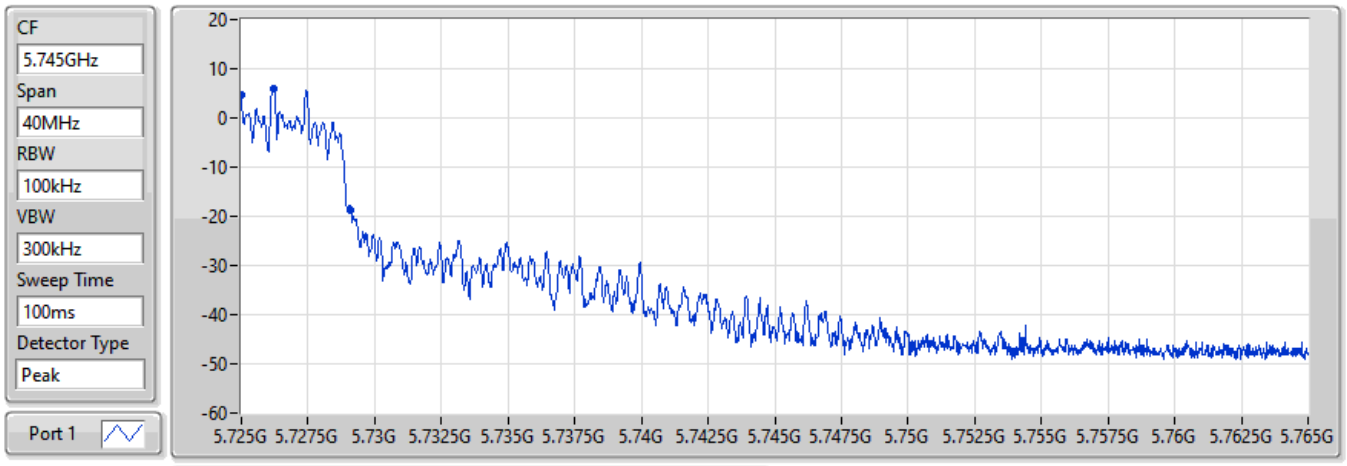

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
4.1M	5.725G	5.7291G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5745MHz

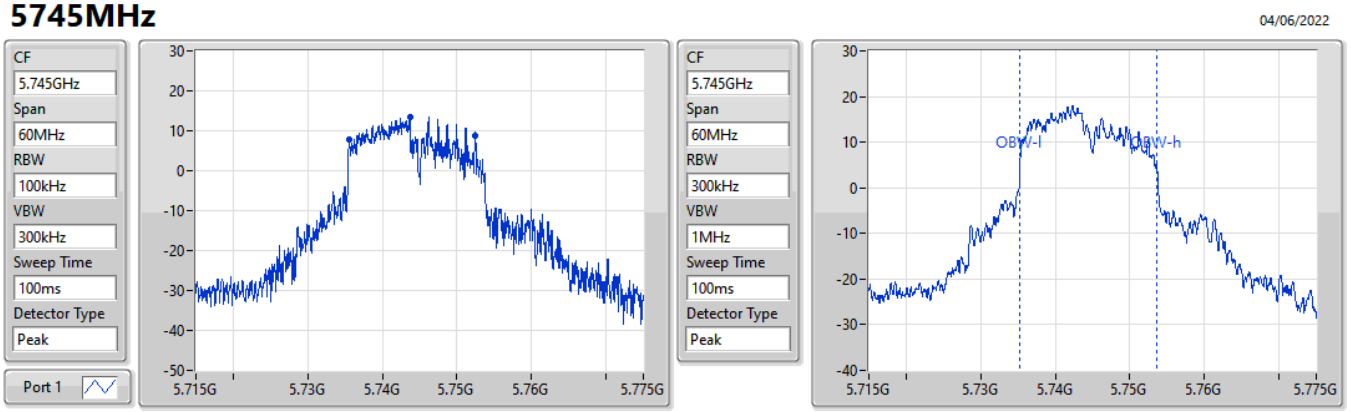

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.98M	5.73552G	5.7525G	18.381M	5.735255G	5.753636G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5745MHz

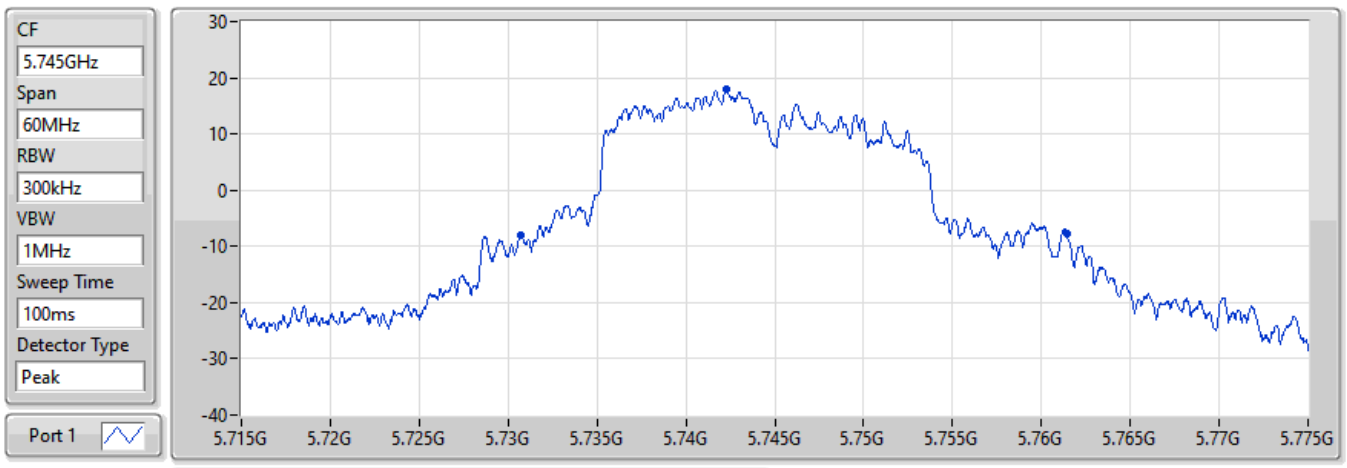


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
30.69M	5.73072G	5.76141G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5785MHz

04/06/2022

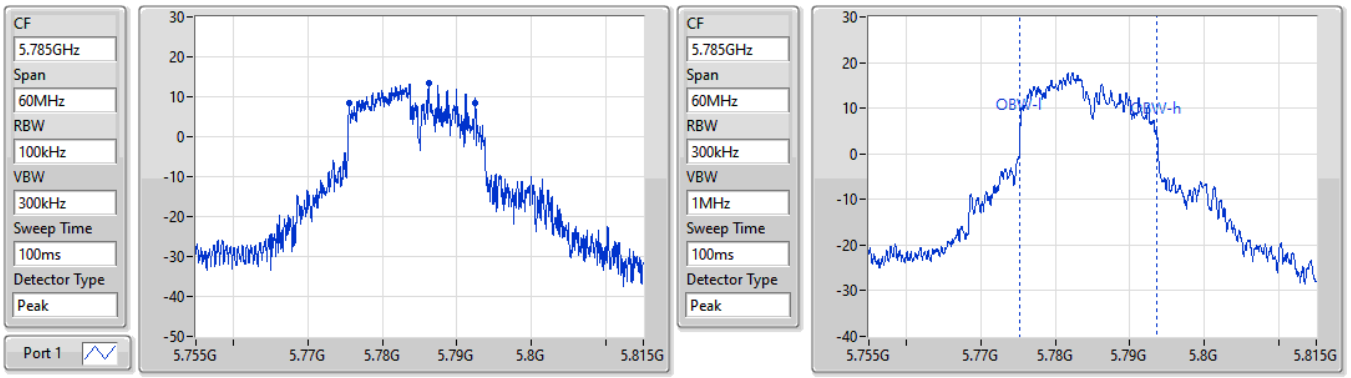


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.95M	5.77555G	5.7925G	18.351M	5.775285G	5.793636G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5785MHz

04/06/2022

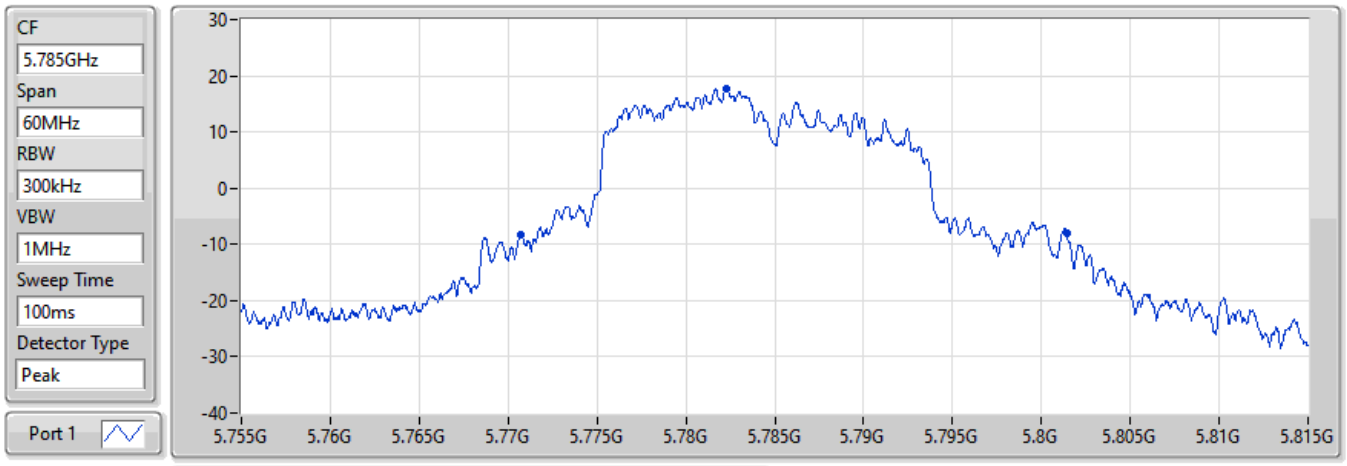


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
30.69M	5.77072G	5.80141G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5825MHz

04/06/2022

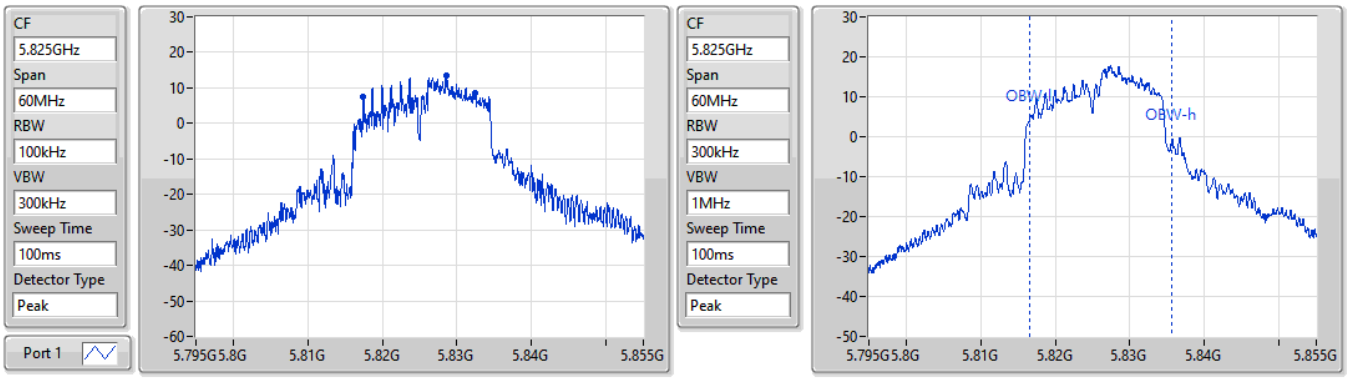


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.06M	5.81741G	5.83247G	19.13M	5.816514G	5.835645G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5825MHz

04/06/2022

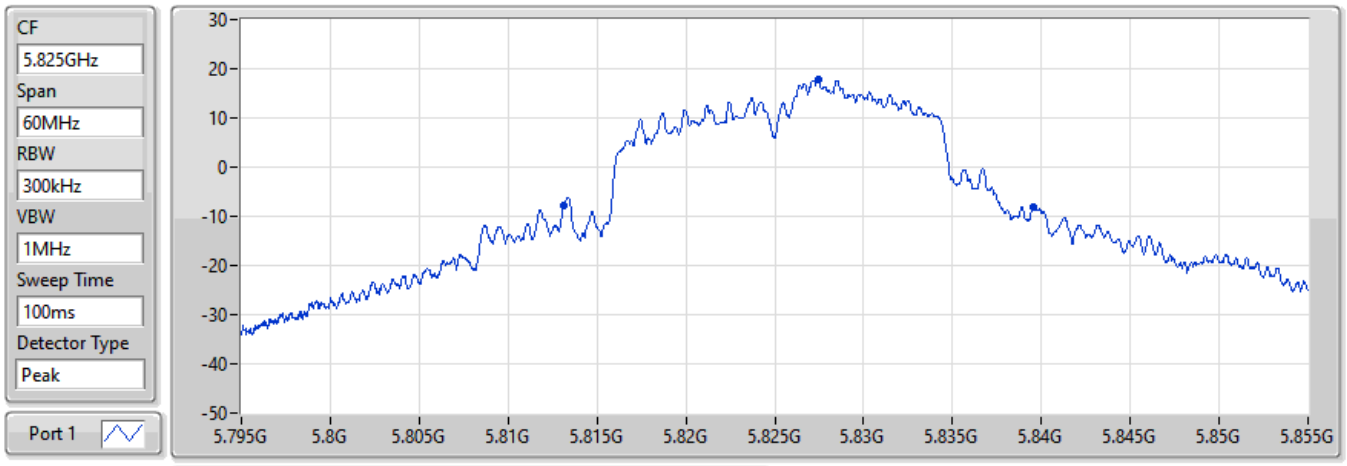

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
26.46M	5.81312G	5.83958G	Inf	1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.35M	18.081M	18M1D1D	19.17M	17.361M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.32M	17.781M	17M8D1D	19.2M	17.601M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.32M	17.751M	17M8D1D	15.255M	14.498M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	14.52M	18.111M	18M1D1D	3.04M	3.798M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	19.35M	17.571M
5200MHz	Pass	Inf	19.17M	17.361M
5240MHz	Pass	Inf	19.29M	18.081M
5260MHz	Pass	Inf	19.26M	17.601M
5300MHz	Pass	Inf	19.2M	17.781M
5320MHz	Pass	Inf	19.32M	17.751M
5500MHz	Pass	Inf	19.29M	17.751M
5580MHz	Pass	Inf	19.32M	17.691M
5700MHz	Pass	Inf	19.23M	17.661M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.255M	14.498M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	3.04M	3.798M
5745MHz	Pass	500k	14.46M	18.111M
5785MHz	Pass	500k	14.49M	17.571M
5825MHz	Pass	500k	14.52M	17.931M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5180MHz

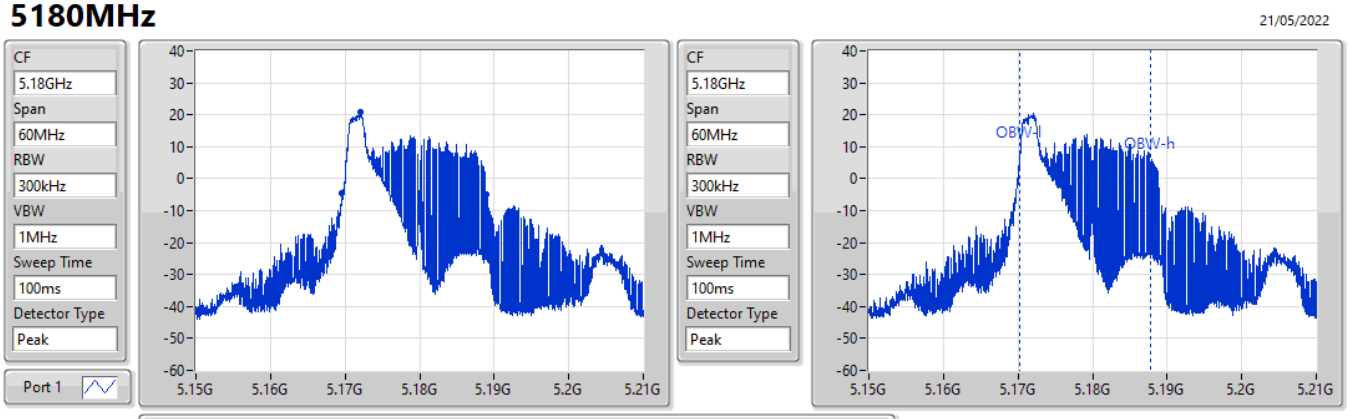

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.35M	5.16959G	5.18894G	17.571M	5.170255G	5.187826G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5200MHz

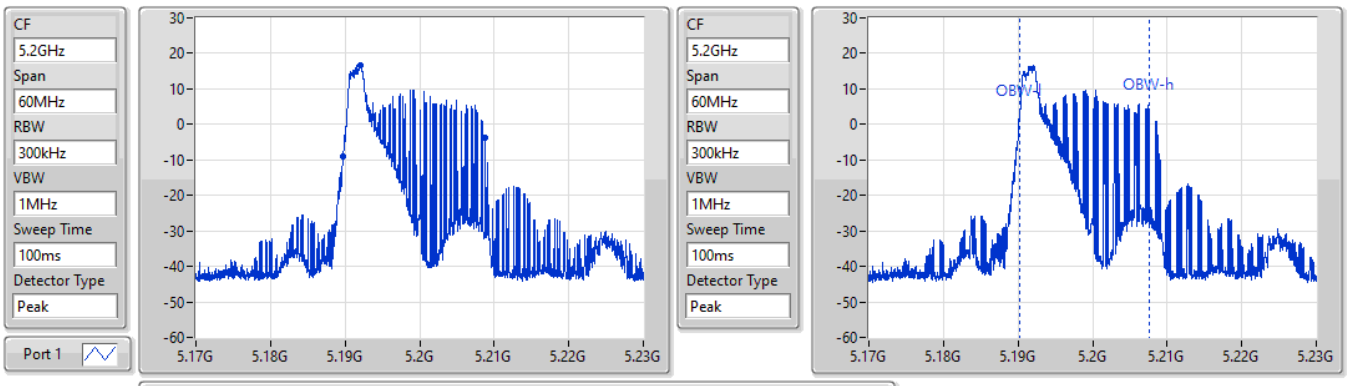

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.18968G	5.20885G	17.361M	5.190255G	5.207616G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5240MHz

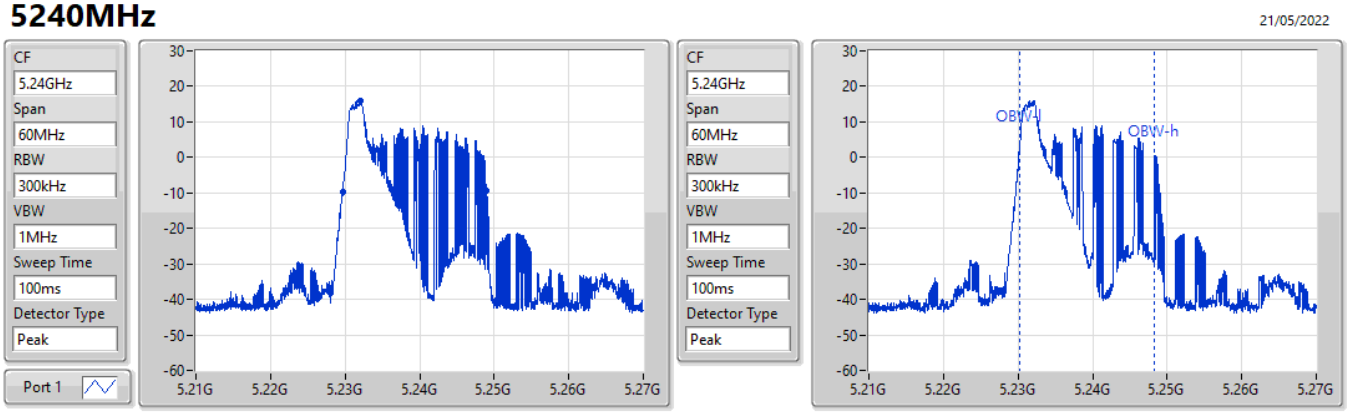

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.29M	5.22968G	5.24897G	18.081M	5.230255G	5.248336G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5260MHz

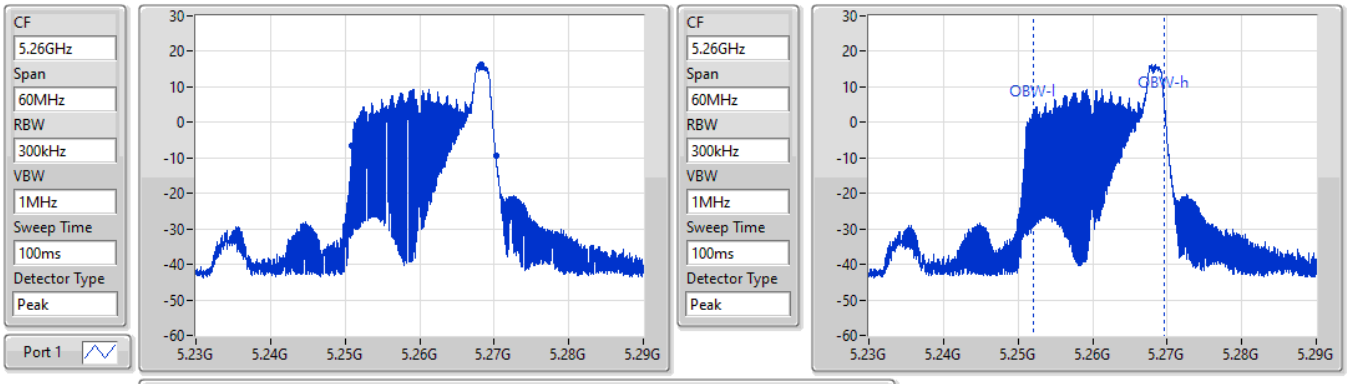

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.26M	5.25097G	5.27023G	17.601M	5.252054G	5.269655G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5300MHz

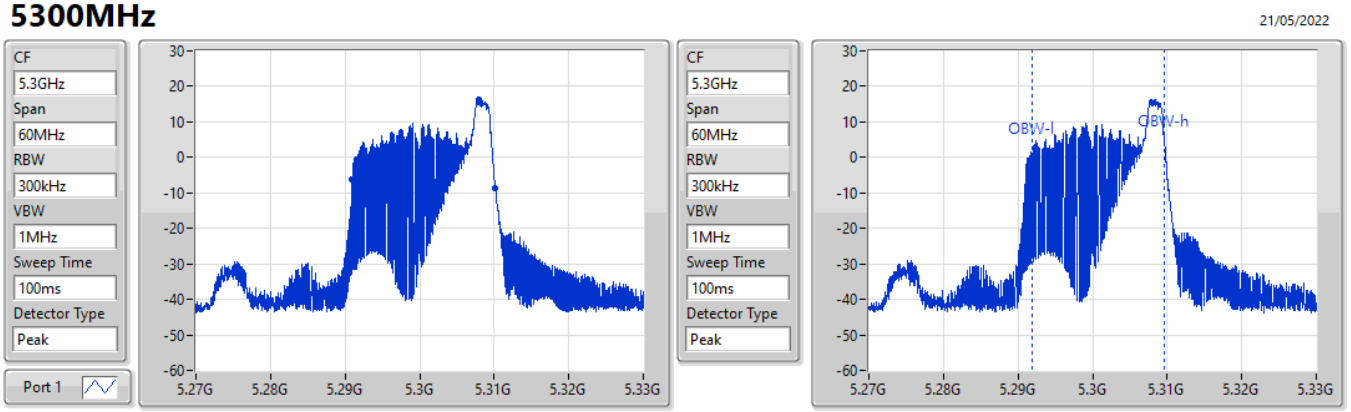

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.2M	5.29097G	5.31017G	17.781M	5.291874G	5.309655G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5320MHz

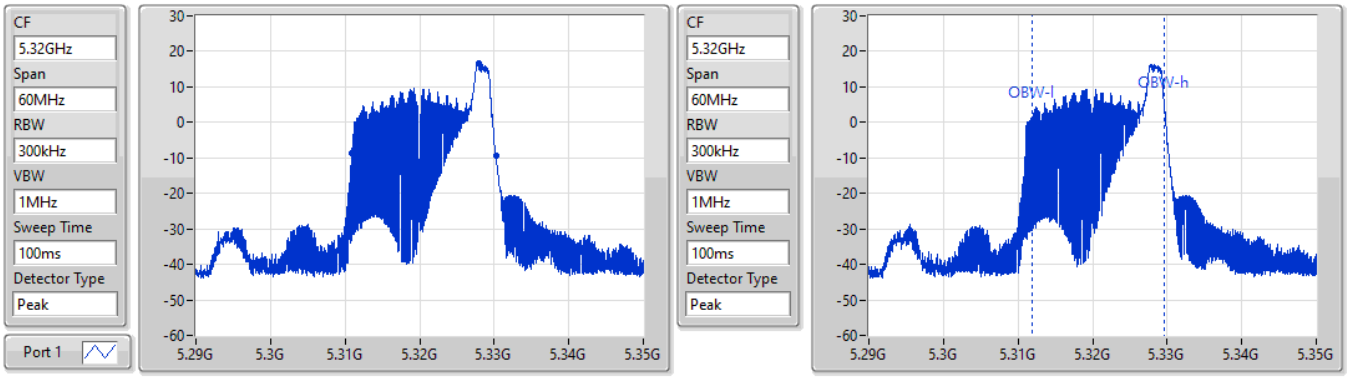


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.32M	5.31091G	5.33023G	17.751M	5.311904G	5.329655G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5500MHz

21/05/2022

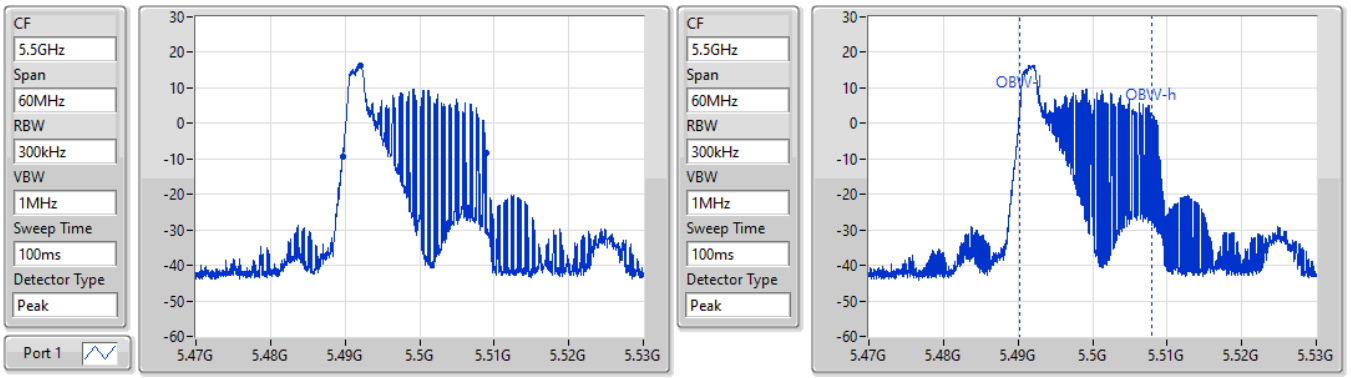


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.29M	5.48965G	5.50894G	17.751M	5.490255G	5.508006G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5580MHz

21/05/2022

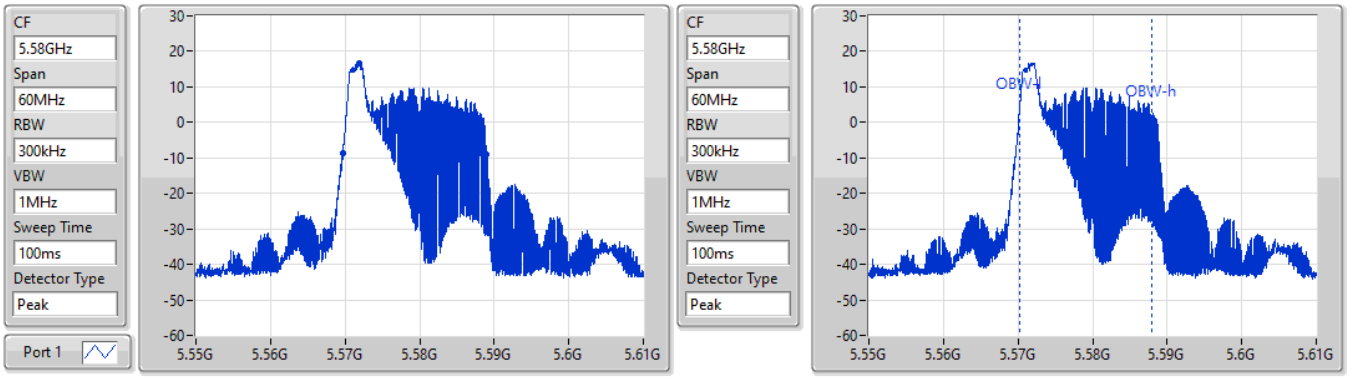


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.32M	5.56968G	5.589G	17.691M	5.570255G	5.587946G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5700MHz

21/05/2022

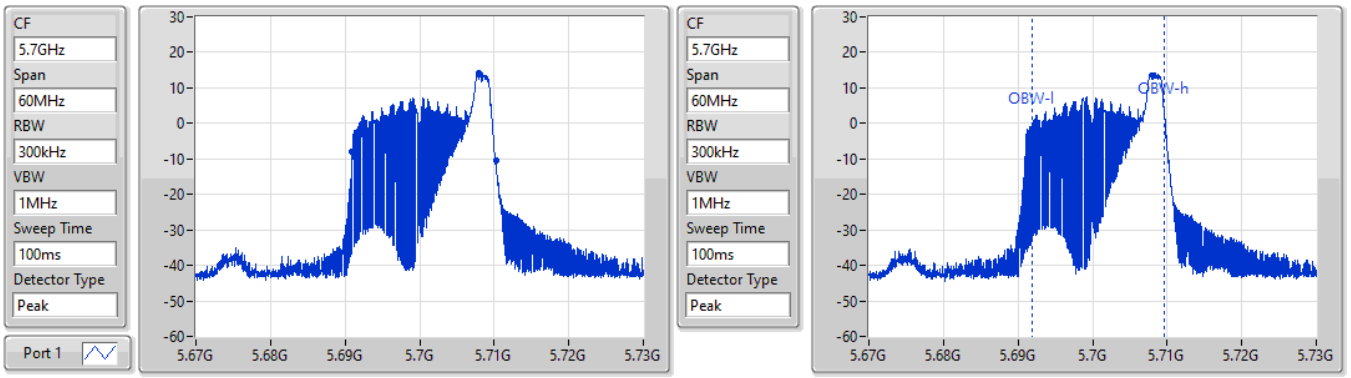


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.23M	5.69097G	5.7102G	17.661M	5.691964G	5.709625G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.47-5.725GHz

03/06/2022

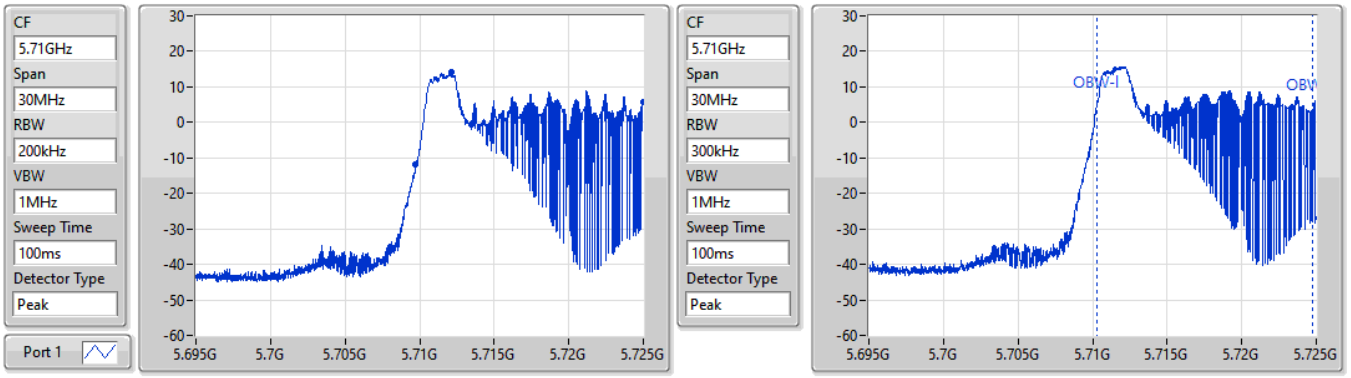


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.255M	5.709745G	5.725G	14.498M	5.71027G	5.724768G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz

03/06/2022

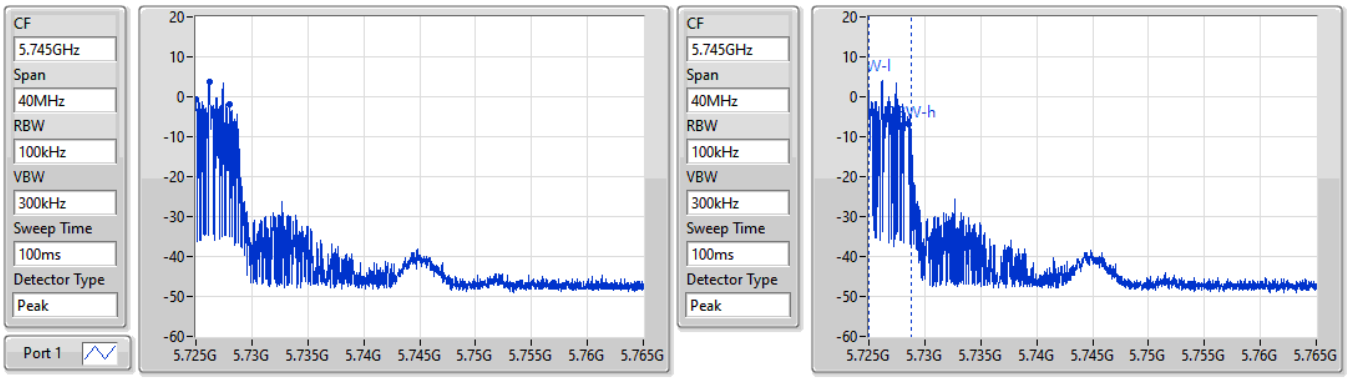


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
3.04M	5.72502G	5.72806G	3.798M	5.72501G	5.728808G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz


03/06/2022

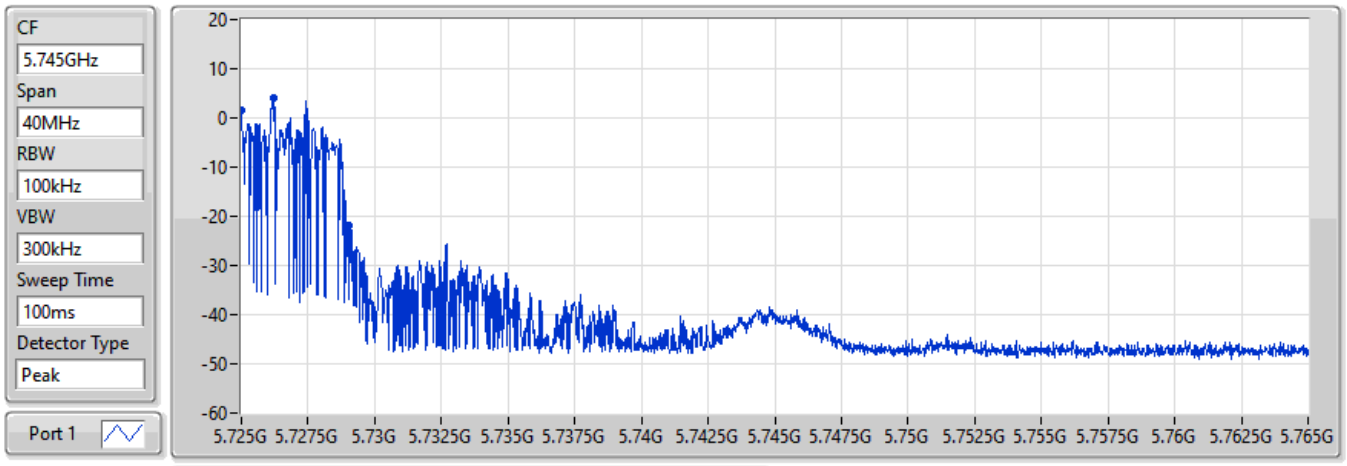

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
4M	5.725G	5.729G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5745MHz

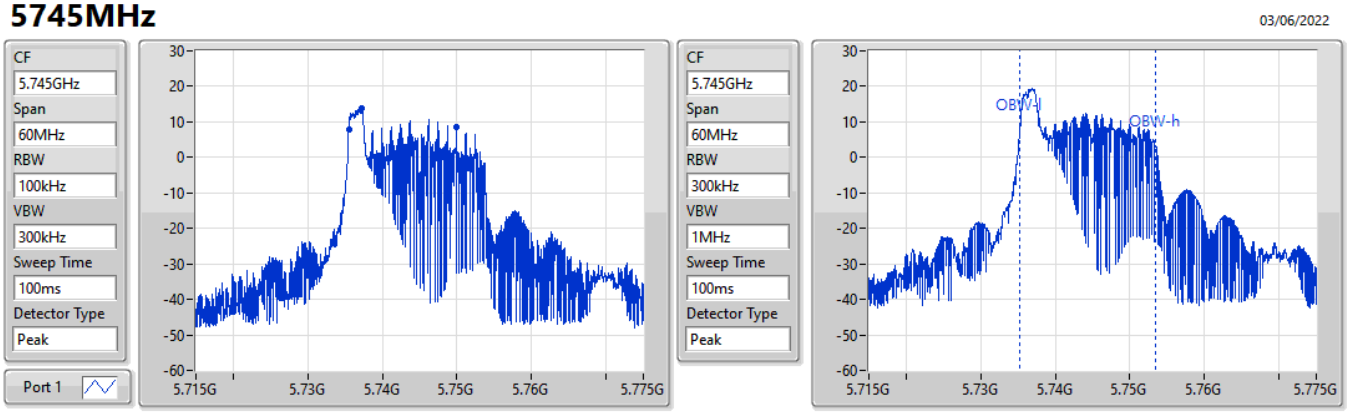

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.46M	5.73549G	5.74995G	18.111M	5.735255G	5.753366G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5745MHz

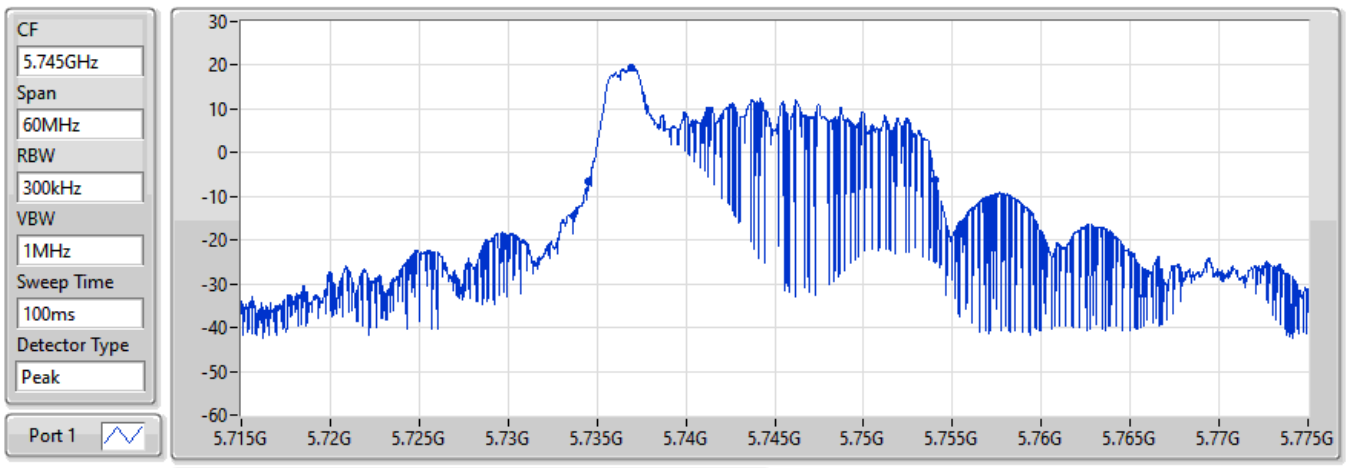


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.5M	5.7345G	5.754G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5785MHz

03/06/2022

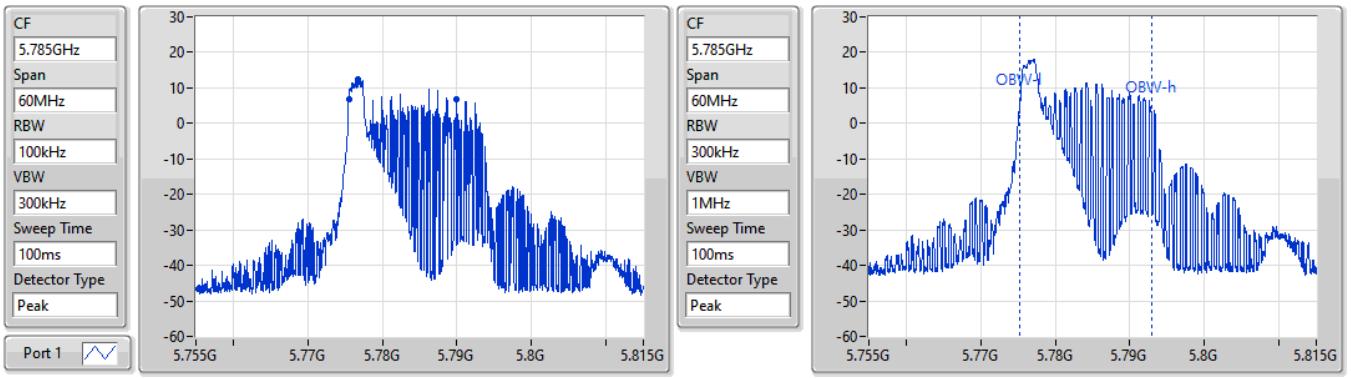


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.49M	5.77549G	5.78998G	17.571M	5.775285G	5.792856G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5785MHz


03/06/2022

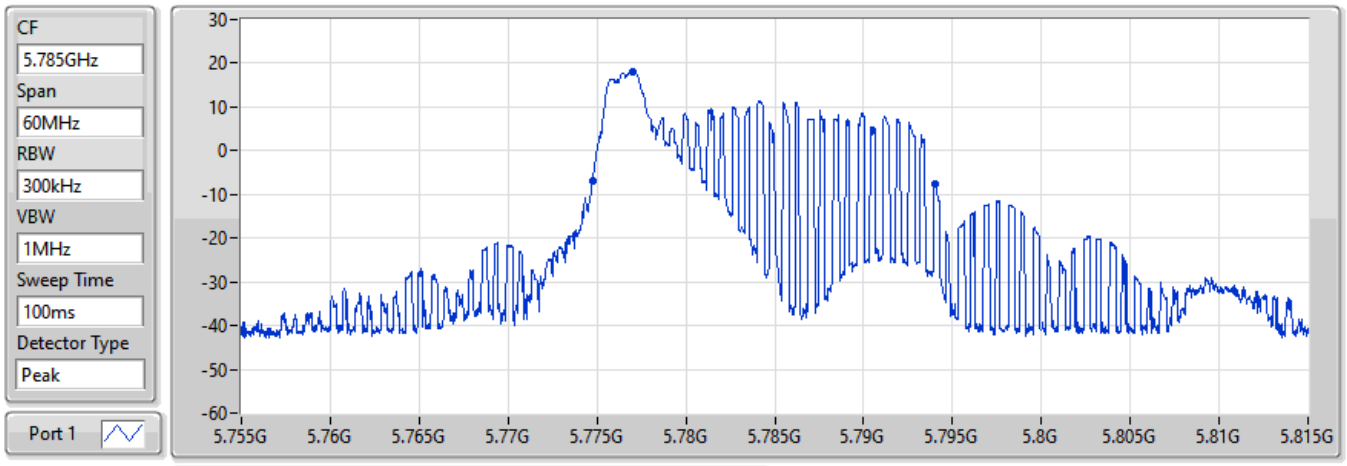

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.29M	5.77474G	5.79403G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5825MHz

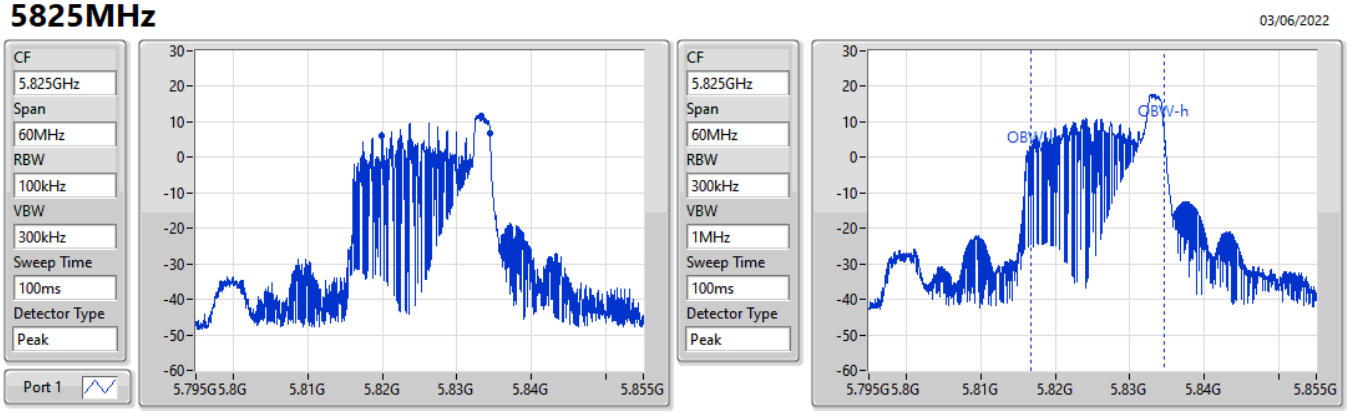

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.52M	5.8199G	5.83442G	17.931M	5.816724G	5.834655G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5825MHz

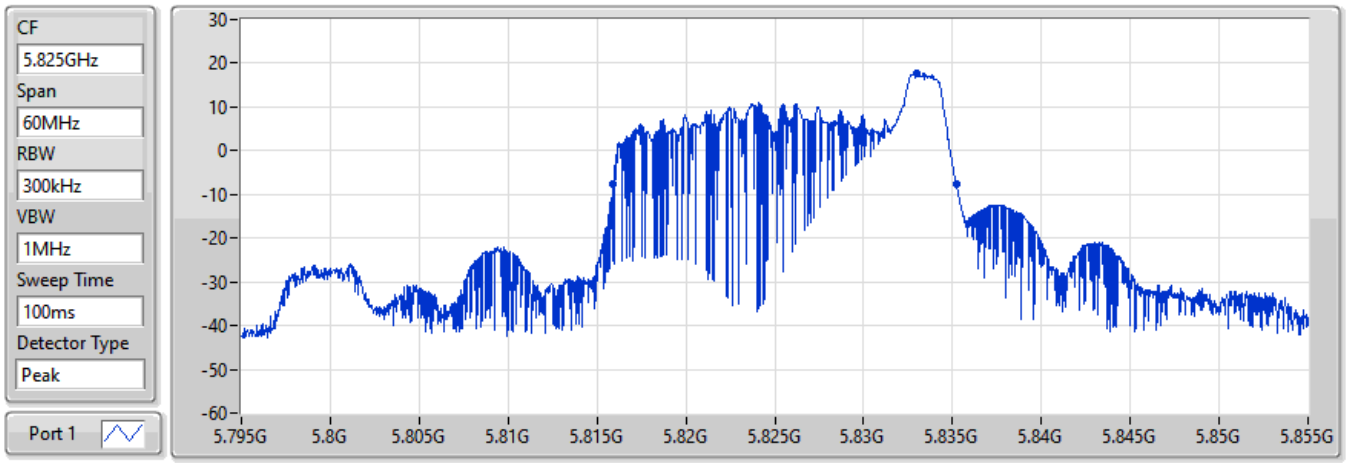

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.29M	5.81591G	5.8352G	Inf	1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.77M	17.811M	17M8D1D	19.08M	17.781M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.17M	17.871M	17M9D1D	19.17M	17.841M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.17M	17.841M	17M8D1D	14.94M	14.408M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	17.01M	18.021M	18M0D1D	2.52M	3.898M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	19.08M	17.781M
5200MHz	Pass	Inf	19.77M	17.811M
5240MHz	Pass	Inf	19.11M	17.811M
5260MHz	Pass	Inf	19.17M	17.841M
5300MHz	Pass	Inf	19.17M	17.841M
5320MHz	Pass	Inf	19.17M	17.871M
5500MHz	Pass	Inf	19.08M	17.781M
5580MHz	Pass	Inf	19.08M	17.781M
5700MHz	Pass	Inf	19.17M	17.841M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	14.94M	14.408M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.52M	3.898M
5745MHz	Pass	500k	17.01M	18.021M
5785MHz	Pass	500k	17.01M	17.901M
5825MHz	Pass	500k	15.69M	17.901M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5180MHz

21/05/2022

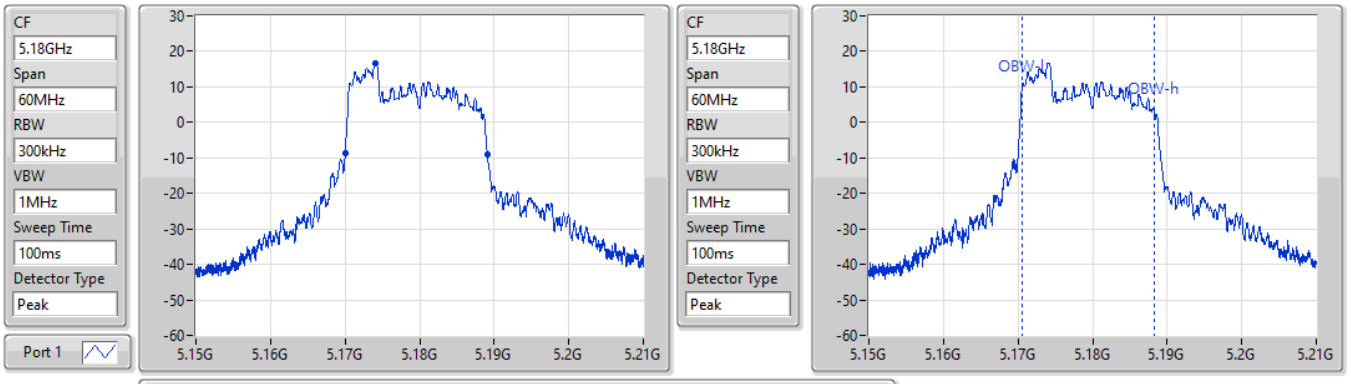


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.17001G	5.18909G	17.781M	5.170495G	5.188276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5200MHz

21/05/2022

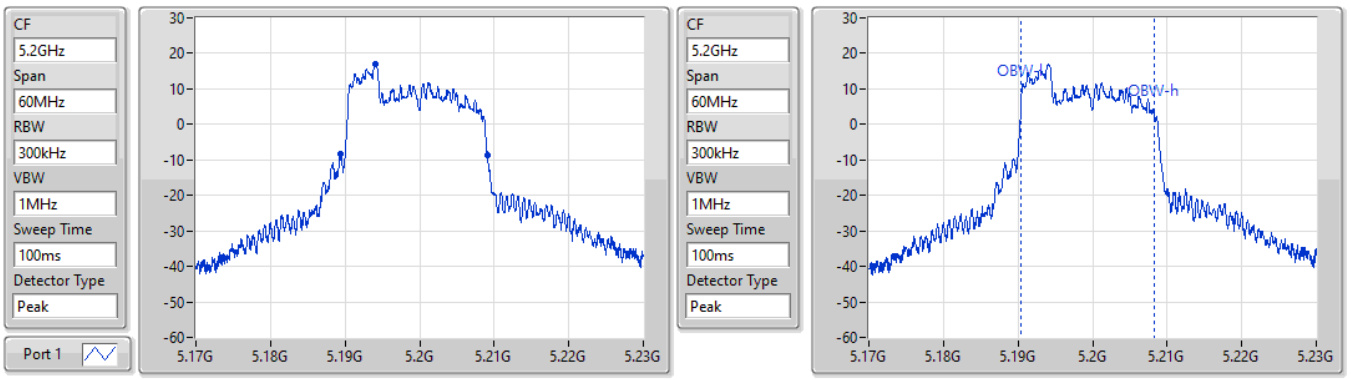


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.77M	5.18932G	5.20909G	17.811M	5.190465G	5.208276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5240MHz

21/05/2022

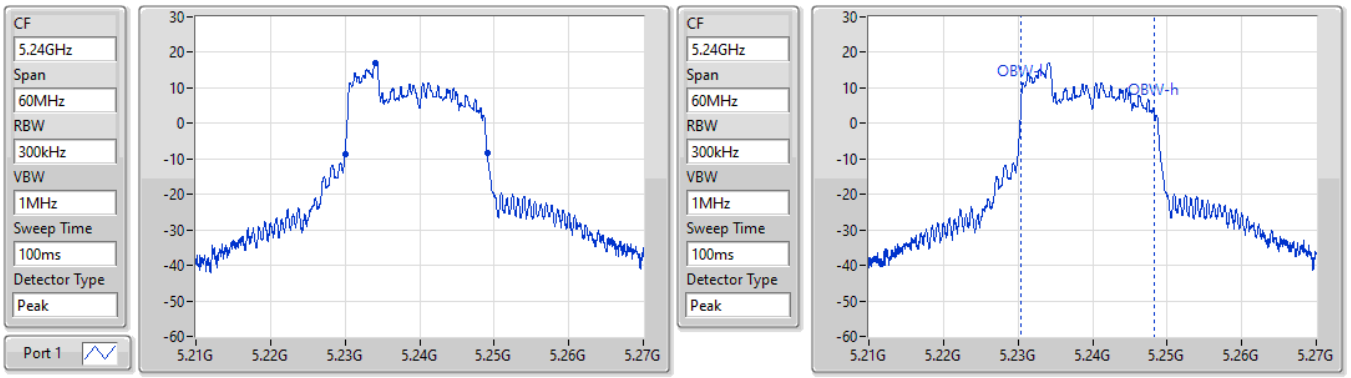


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.22998G	5.24909G	17.811M	5.230465G	5.248276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5260MHz


21/05/2022

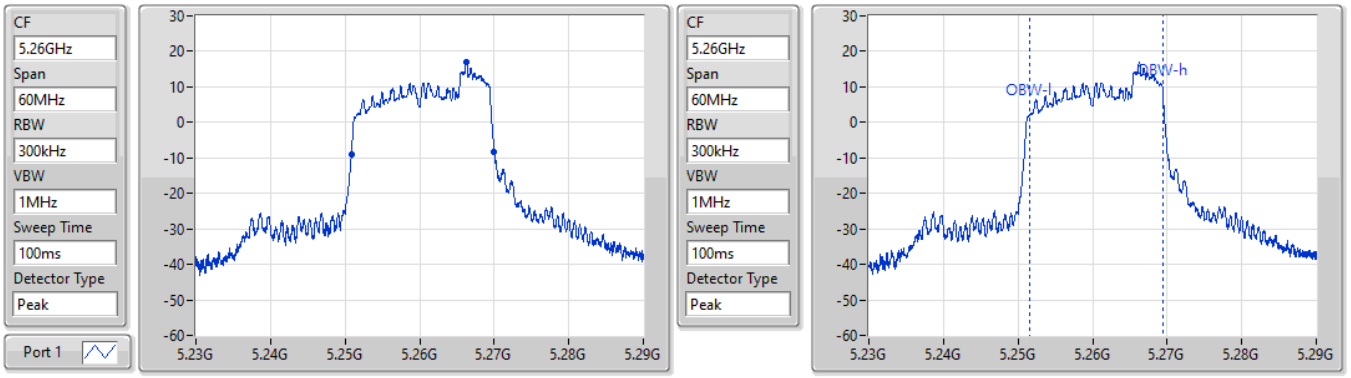

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.25085G	5.27002G	17.841M	5.251604G	5.269445G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5300MHz

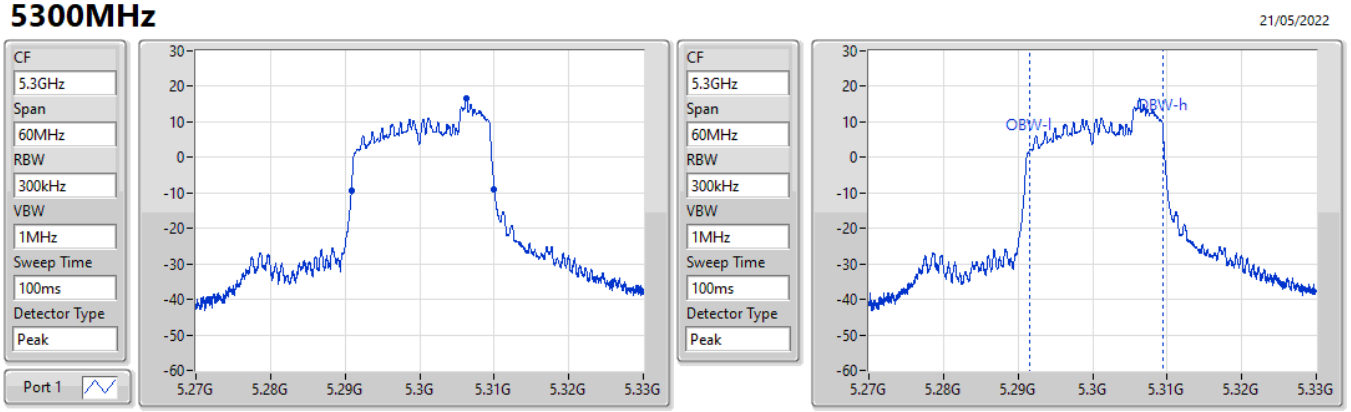

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.29085G	5.31002G	17.841M	5.291604G	5.309445G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5320MHz

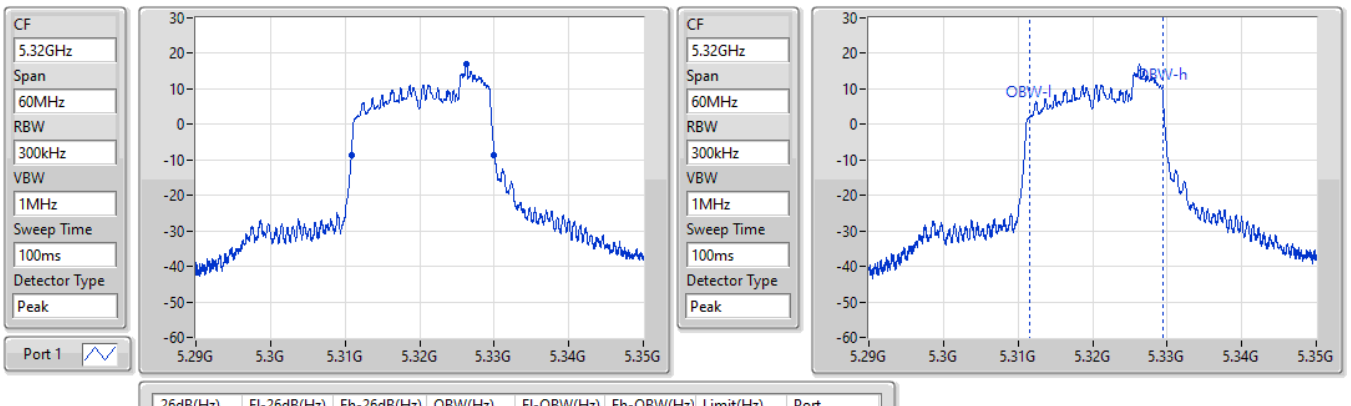

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.31085G	5.33002G	17.871M	5.311574G	5.329445G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5500MHz

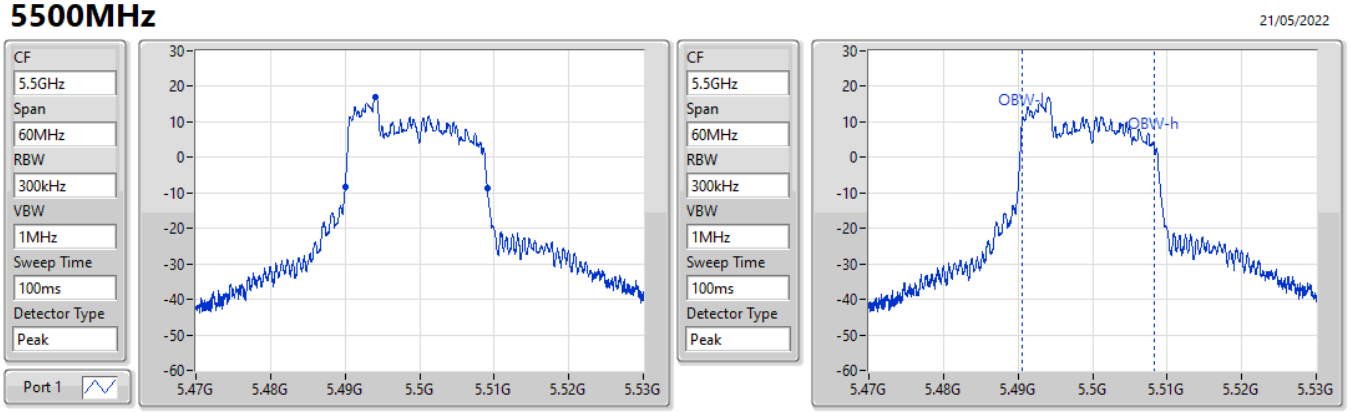

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.49001G	5.50909G	17.781M	5.490495G	5.508276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5580MHz

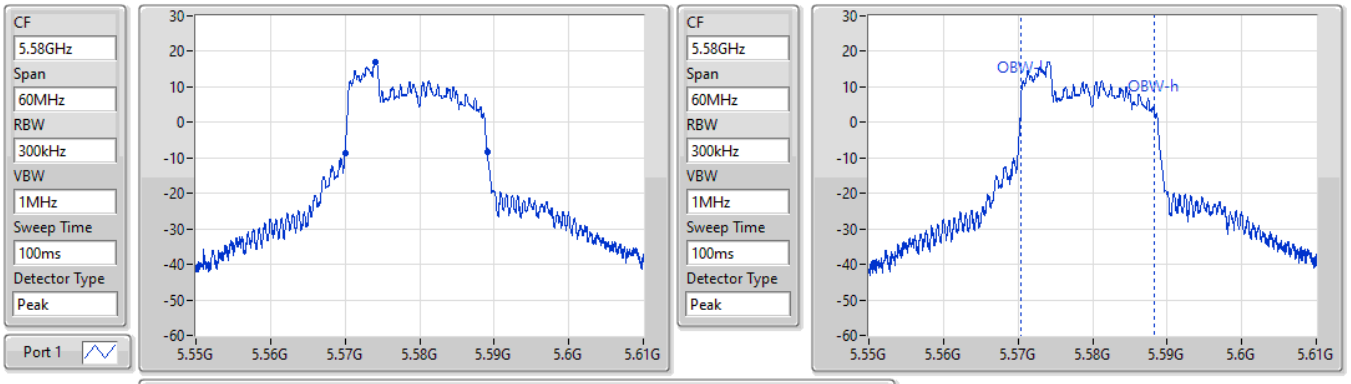


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.56998G	5.58906G	17.781M	5.570465G	5.588246G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5700MHz

21/05/2022

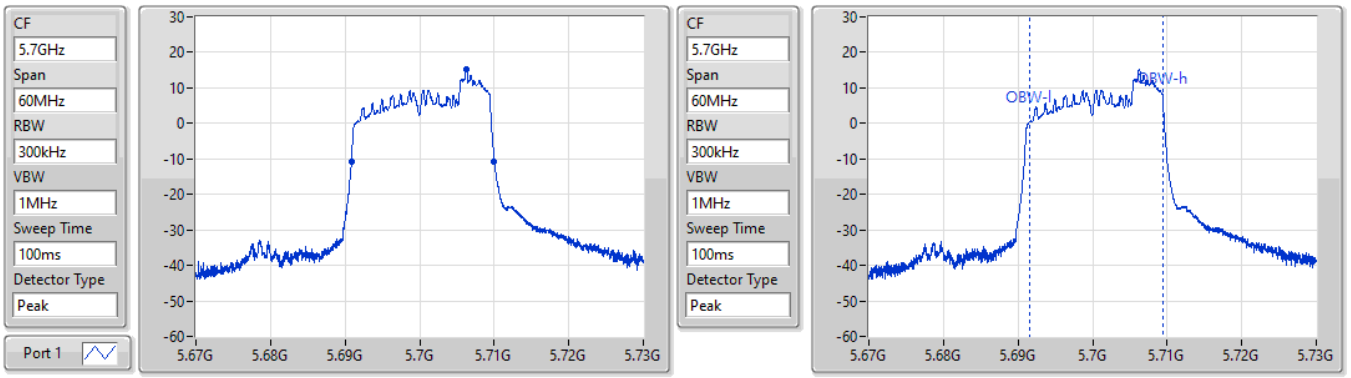


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.69085G	5.71002G	17.841M	5.691604G	5.709445G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.47-5.725GHz

03/06/2022

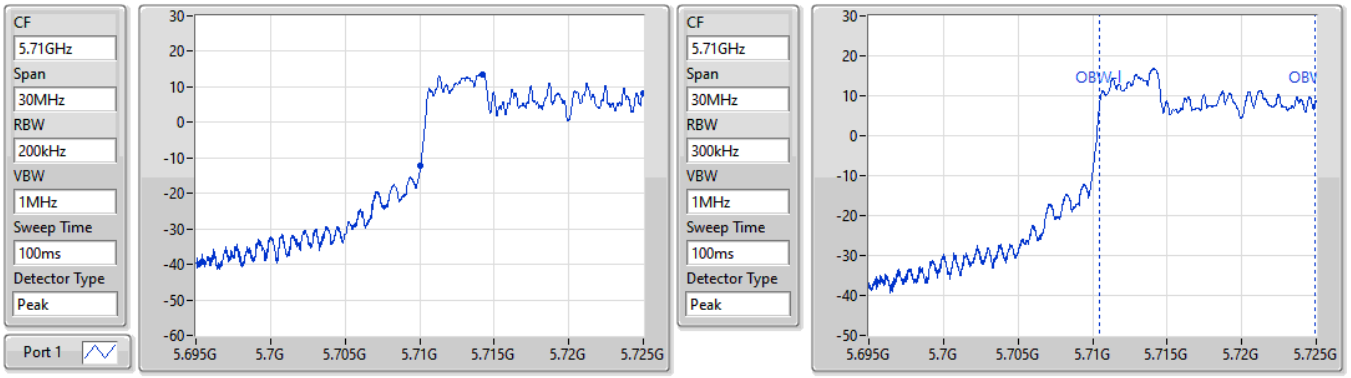


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.94M	5.71006G	5.725G	14.408M	5.71048G	5.724888G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz

03/06/2022

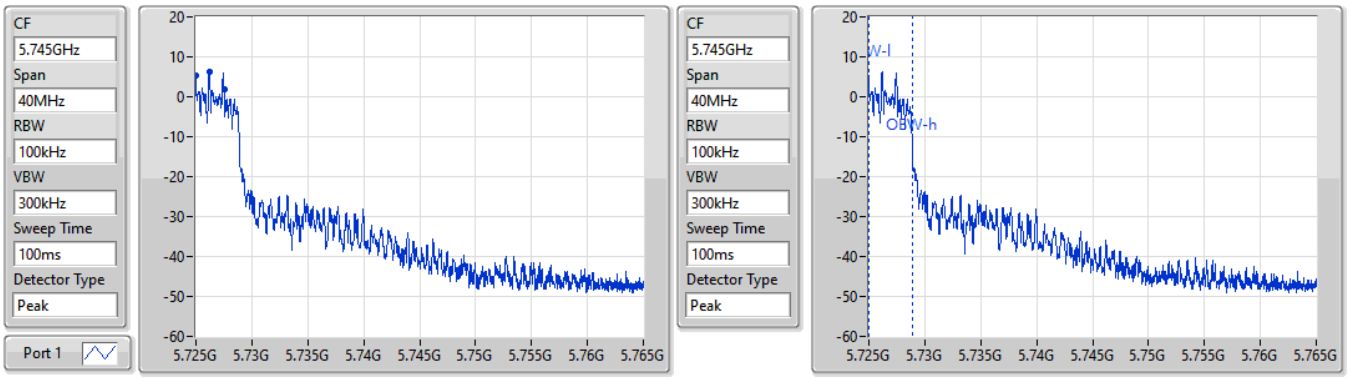


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.52M	5.725G	5.72752G	3.898M	5.72501G	5.728908G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz


03/06/2022

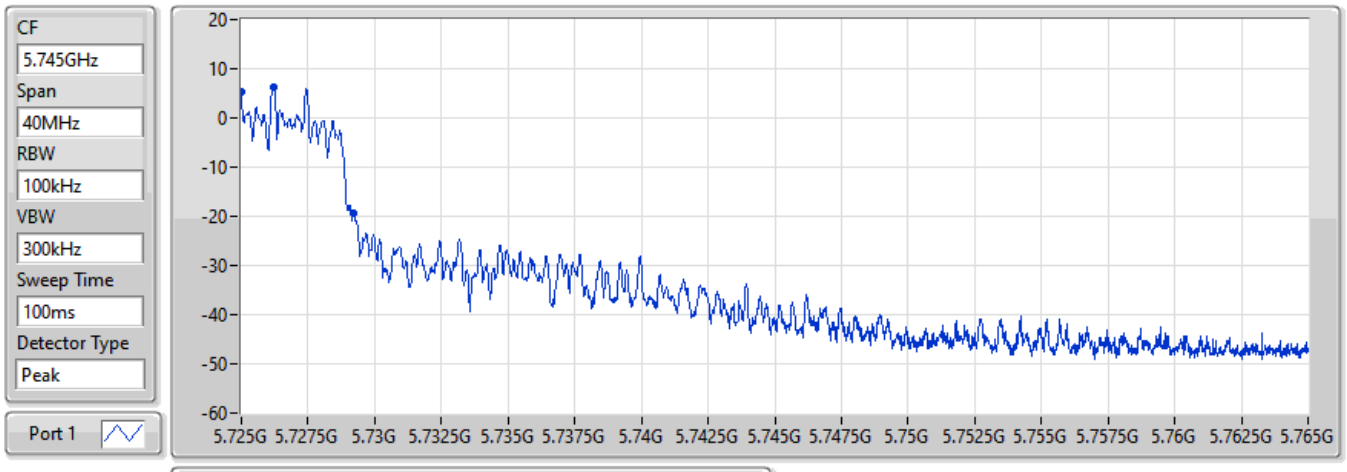

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
4.2M	5.725G	5.7292G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5745MHz

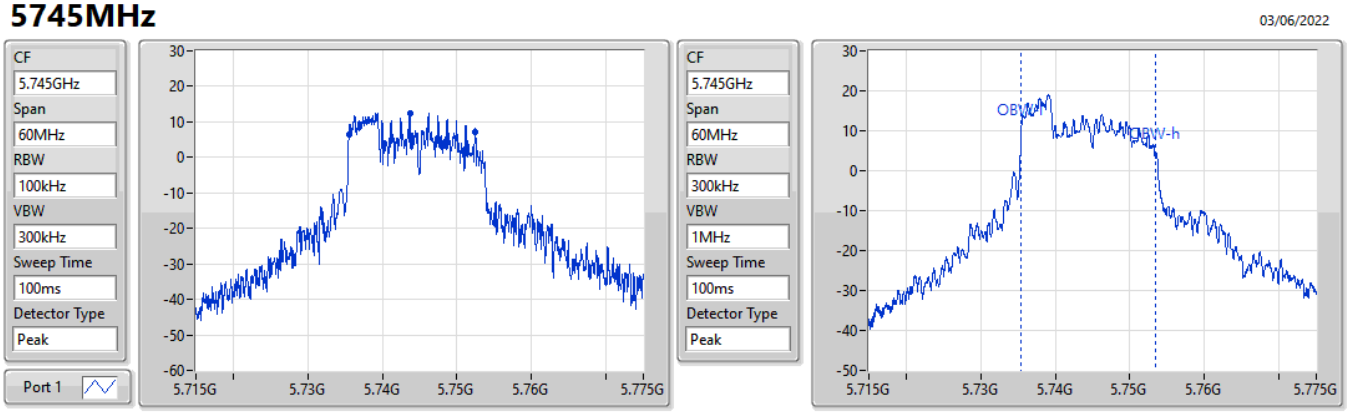

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
17.01M	5.73549G	5.7525G	18.021M	5.735405G	5.753426G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5745MHz

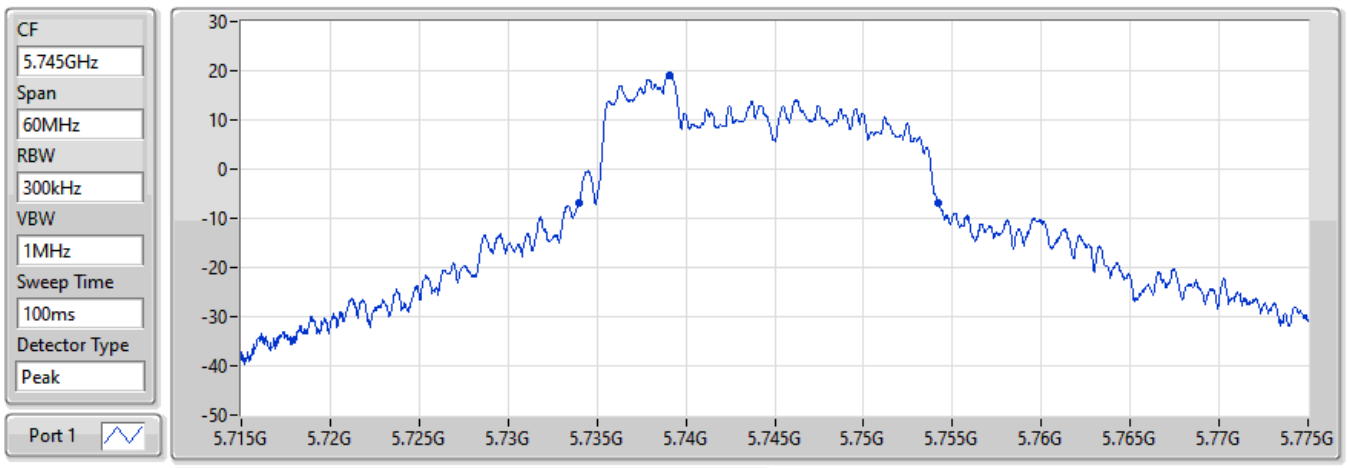

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
20.25M	5.73396G	5.75421G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5785MHz

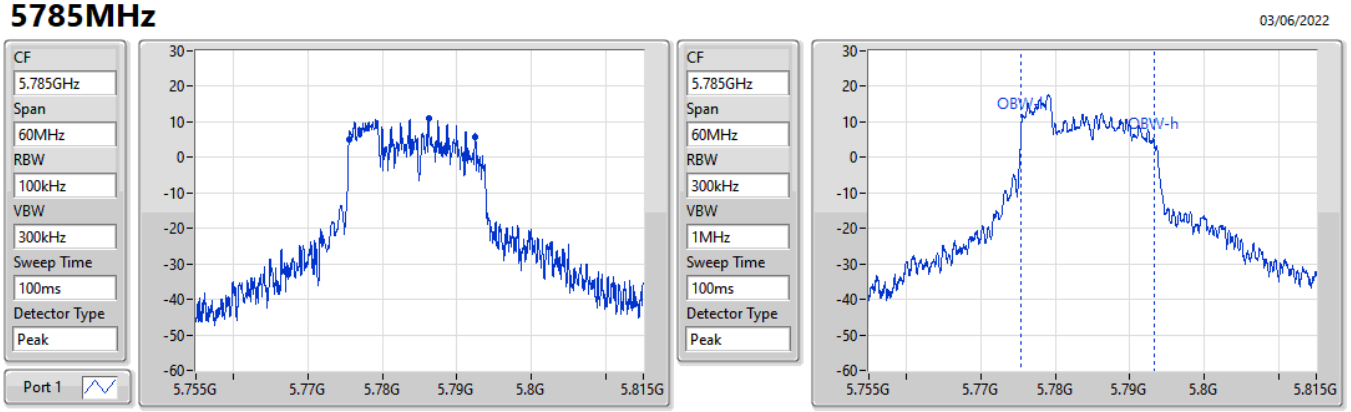

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
17.01M	5.77549G	5.7925G	17.901M	5.775435G	5.793336G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5785MHz

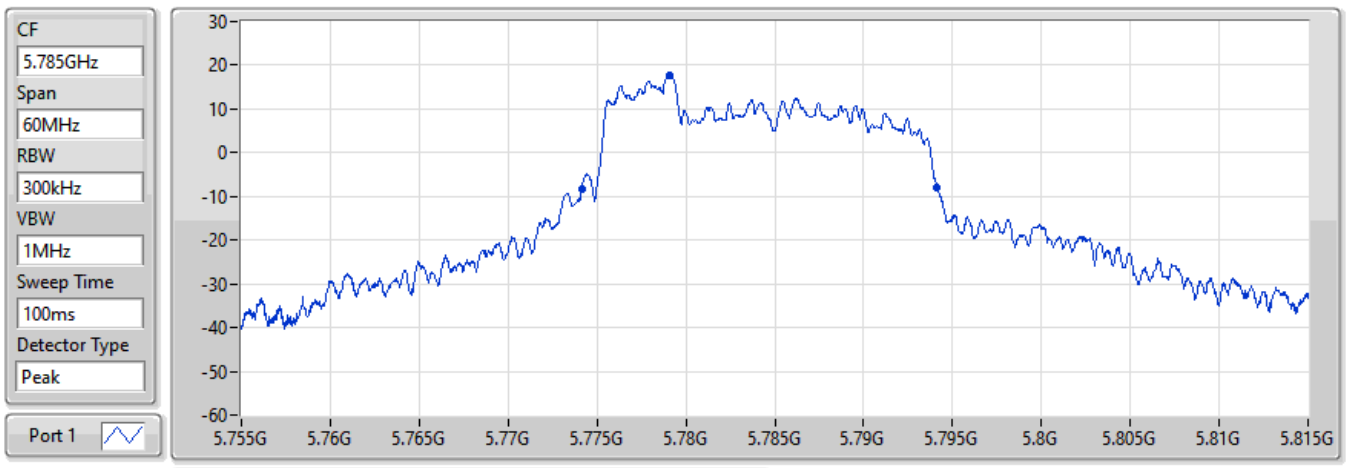


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
20.01M	5.77414G	5.79415G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5825MHz

03/06/2022

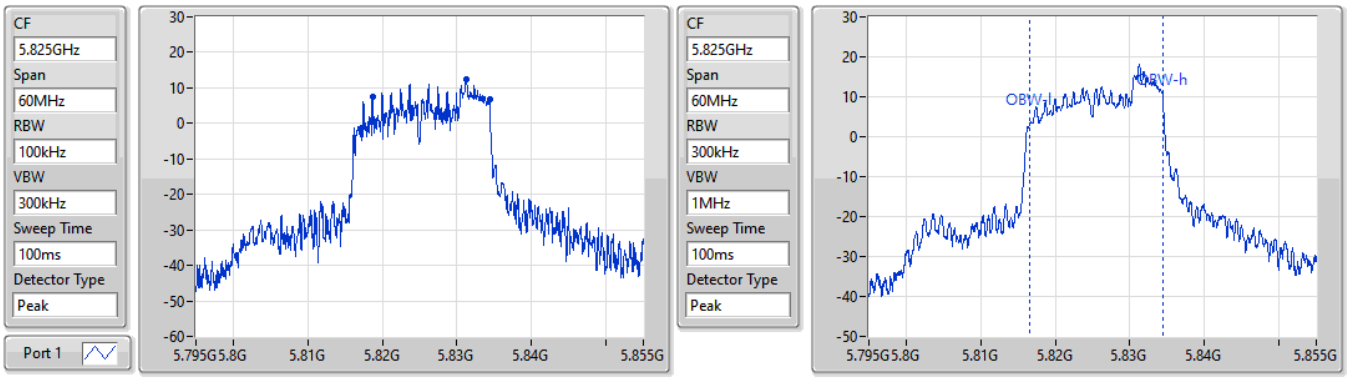


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.69M	5.81867G	5.83436G	17.901M	5.816574G	5.834475G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5825MHz

03/06/2022

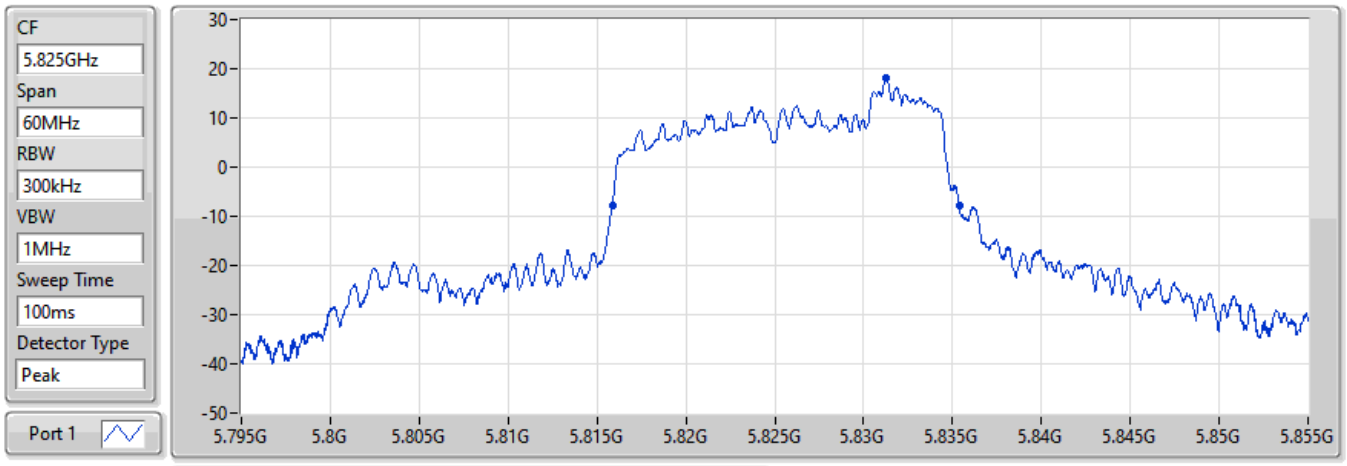

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.53M	5.81585G	5.83538G	Inf	1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.08M	17.781M	17M8D1D	19.08M	17.721M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	20.13M	17.781M	17M8D1D	19.89M	17.751M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.2M	17.781M	17M8D1D	14.835M	14.378M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	16.98M	19.22M	19M2D1D	2.52M	3.918M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-
5180MHz	Pass	Inf	19.08M	17.781M
5200MHz	Pass	Inf	19.08M	17.721M
5240MHz	Pass	Inf	19.08M	17.751M
5260MHz	Pass	Inf	20.13M	17.751M
5300MHz	Pass	Inf	19.89M	17.751M
5320MHz	Pass	Inf	19.95M	17.781M
5500MHz	Pass	Inf	19.11M	17.751M
5580MHz	Pass	Inf	19.14M	17.781M
5700MHz	Pass	Inf	19.2M	17.721M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	14.835M	14.378M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.52M	3.918M
5745MHz	Pass	500k	16.98M	18.381M
5785MHz	Pass	500k	15.9M	17.991M
5825MHz	Pass	500k	15.09M	19.22M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5180MHz

22/05/2022

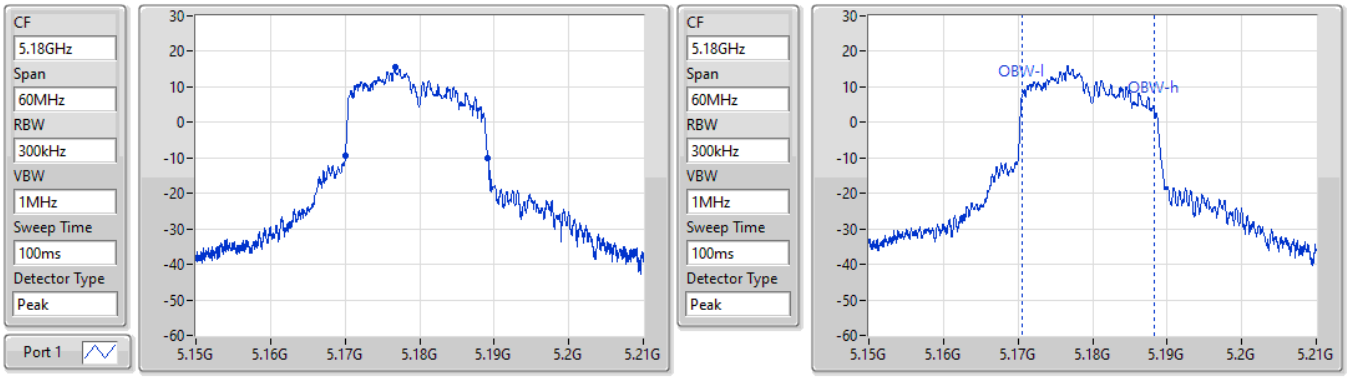


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.17007G	5.18915G	17.781M	5.170495G	5.188276G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5200MHz

22/05/2022

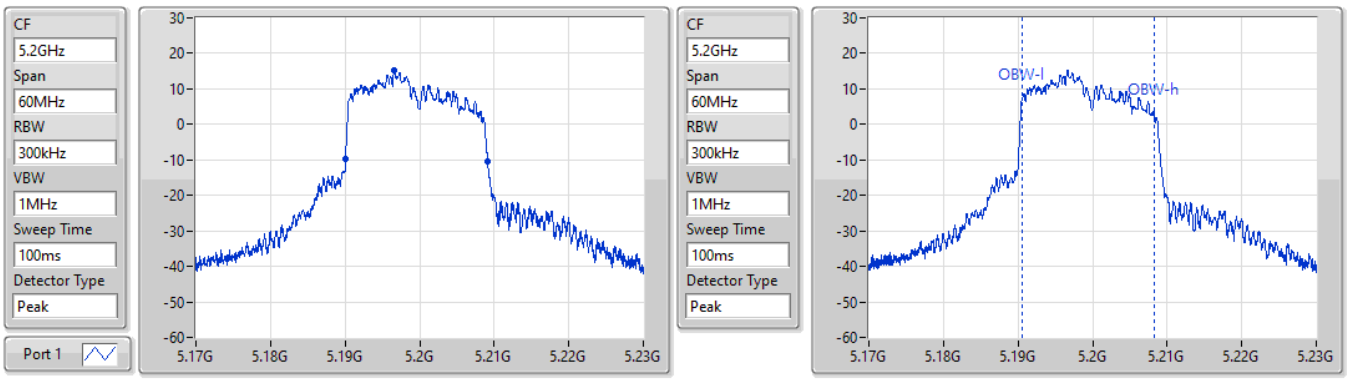


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.19007G	5.20915G	17.721M	5.190525G	5.208246G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5240MHz

22/05/2022

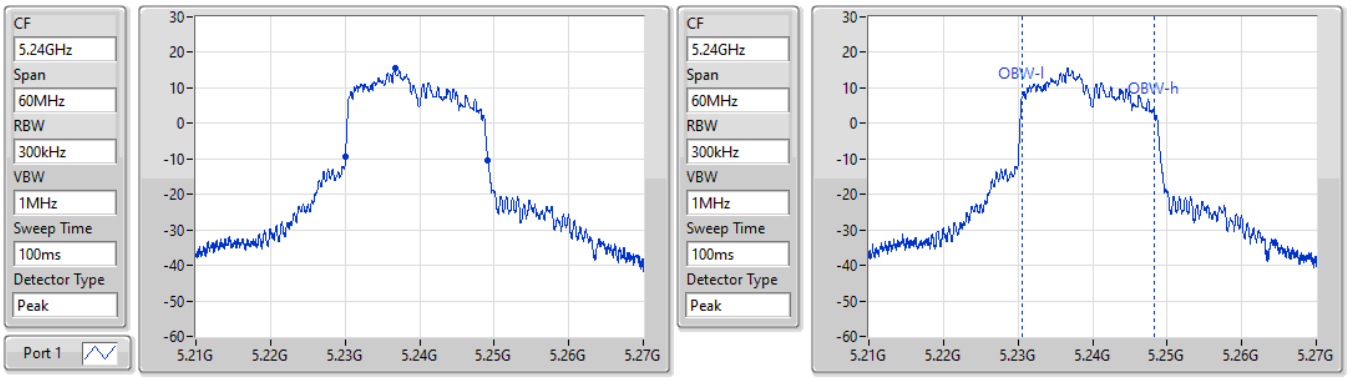


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.23007G	5.24915G	17.751M	5.230495G	5.248246G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5260MHz

22/05/2022

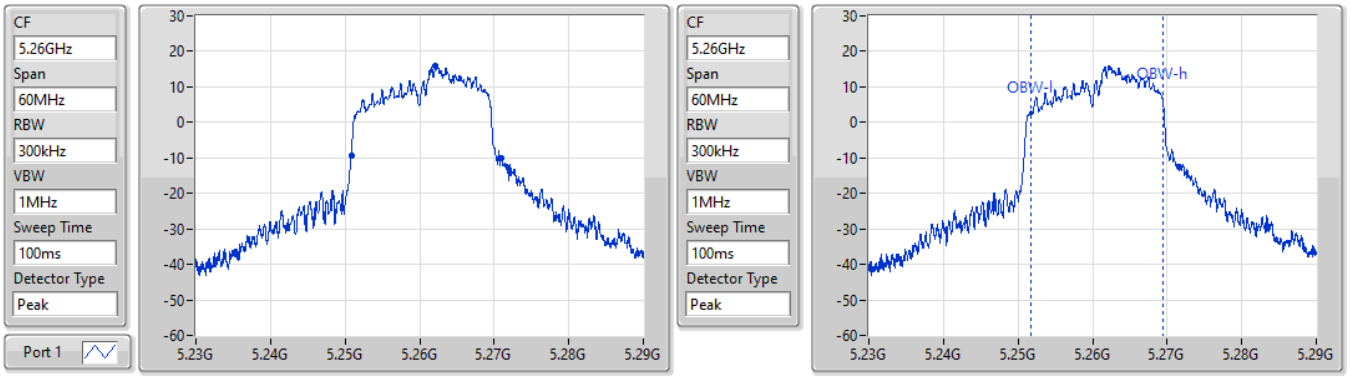


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
20.13M	5.25082G	5.27095G	17.751M	5.251664G	5.269415G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5300MHz

22/05/2022

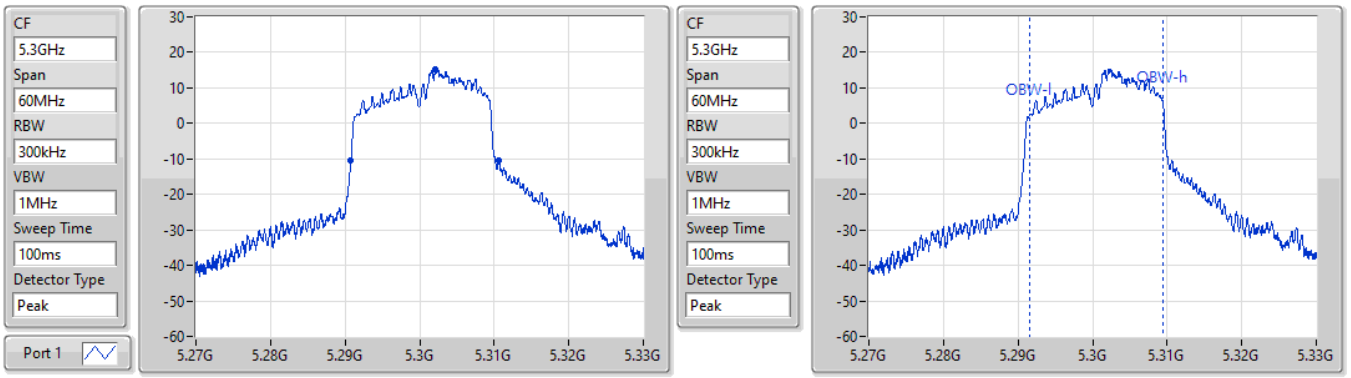


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.89M	5.29079G	5.31068G	17.751M	5.291634G	5.309385G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5320MHz


22/05/2022

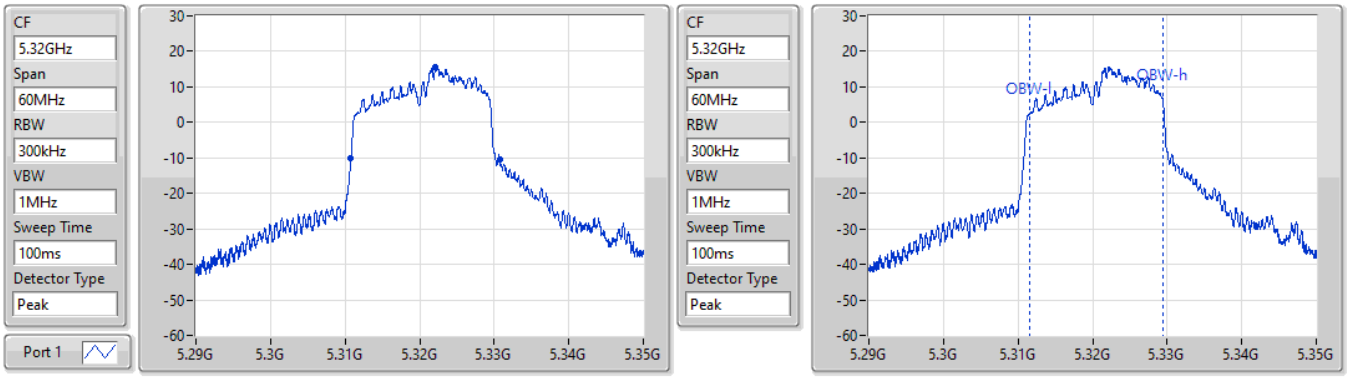

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.95M	5.31079G	5.33074G	17.781M	5.311634G	5.329415G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5500MHz

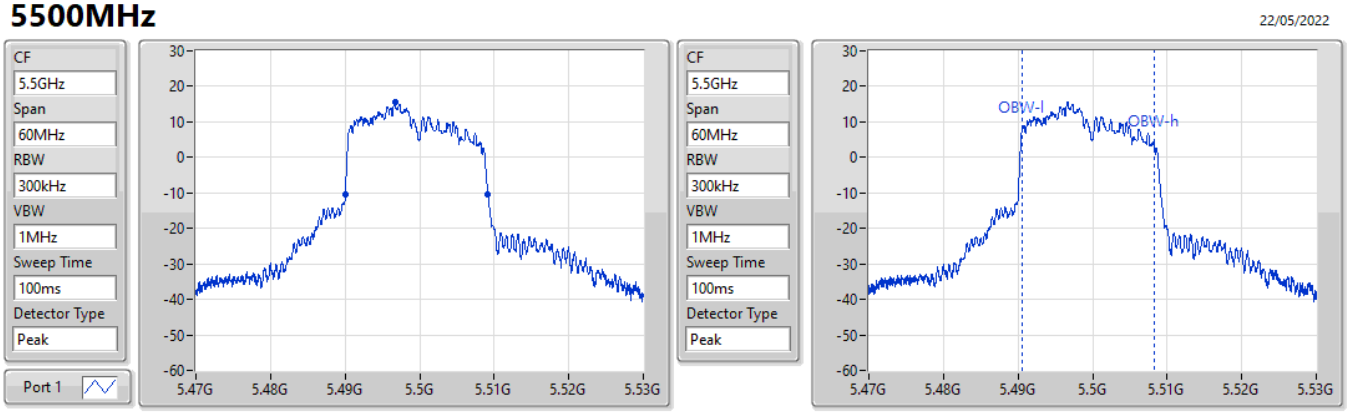

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.49004G	5.50915G	17.751M	5.490495G	5.508246G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5580MHz

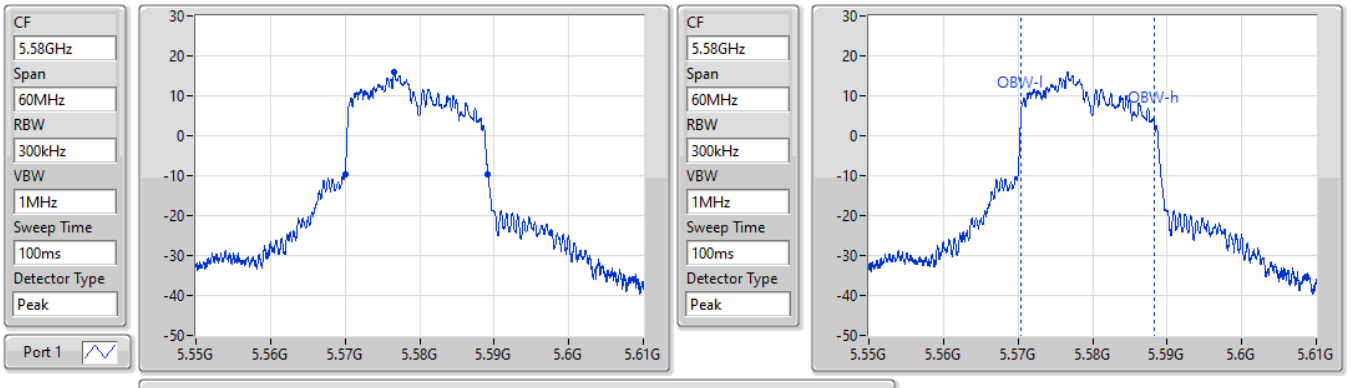


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.14M	5.57001G	5.58915G	17.781M	5.570465G	5.588246G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5700MHz

22/05/2022

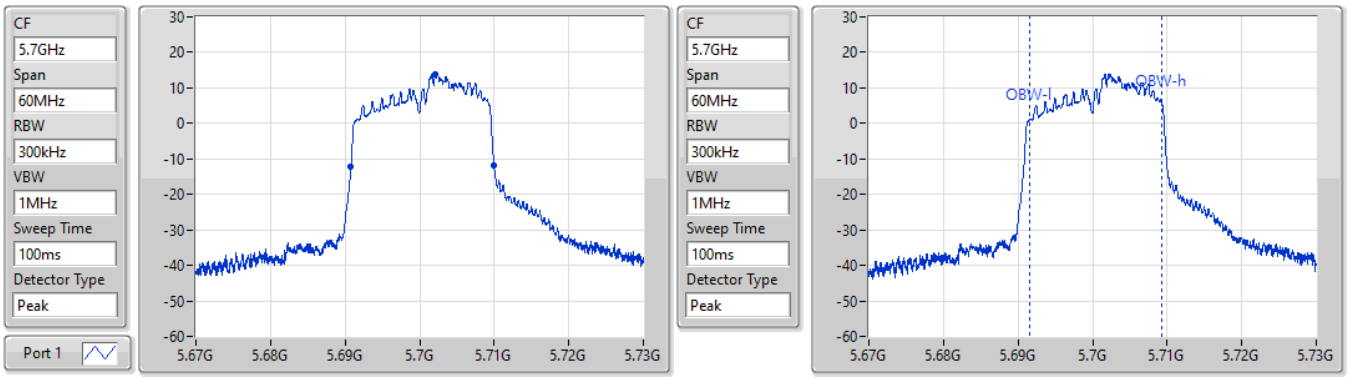


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.2M	5.69079G	5.70999G	17.721M	5.691634G	5.709355G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5720MHz Straddle 5.47-5.725GHz

03/06/2022

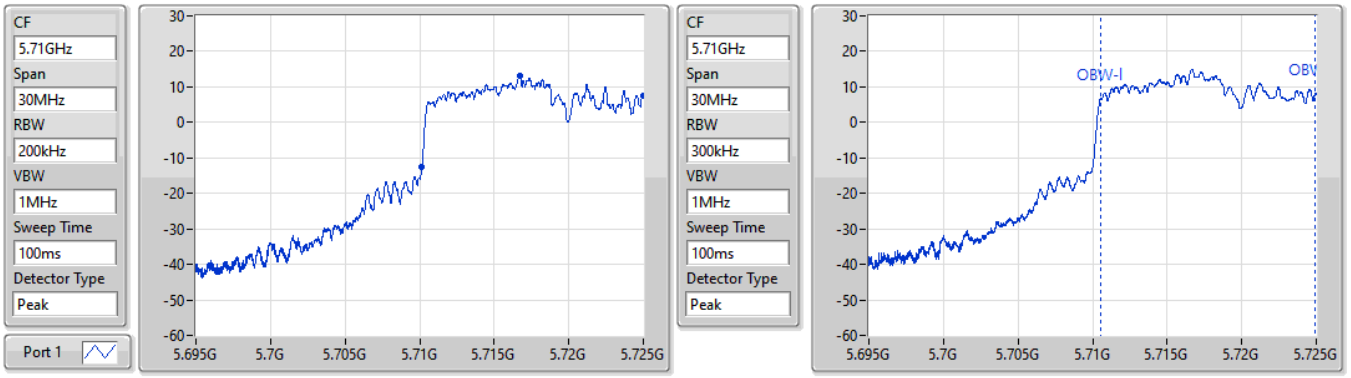


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.835M	5.710165G	5.725G	14.378M	5.71051G	5.724888G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz

03/06/2022

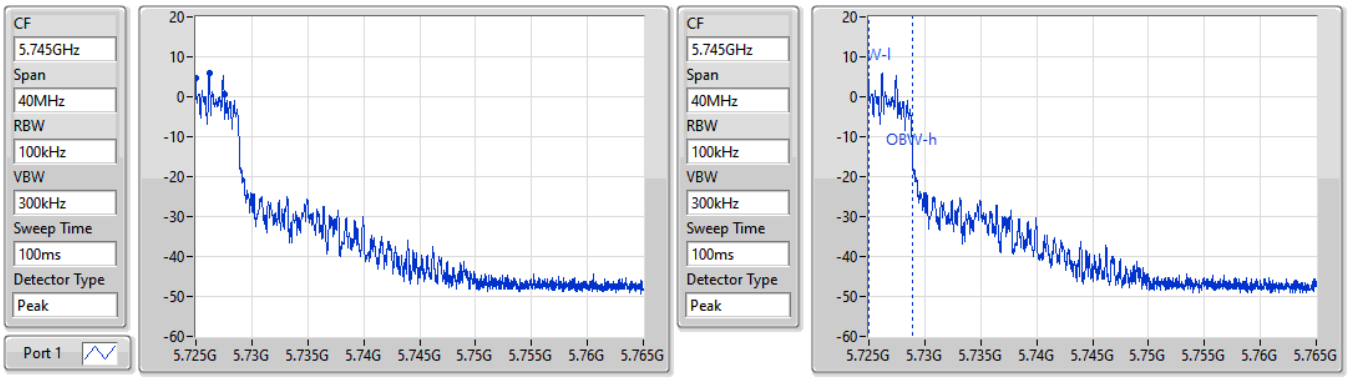


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.52M	5.725G	5.72752G	3.918M	5.72501G	5.728928G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX **EBW**

5720MHz Straddle 5.725-5.85GHz

03/06/2022

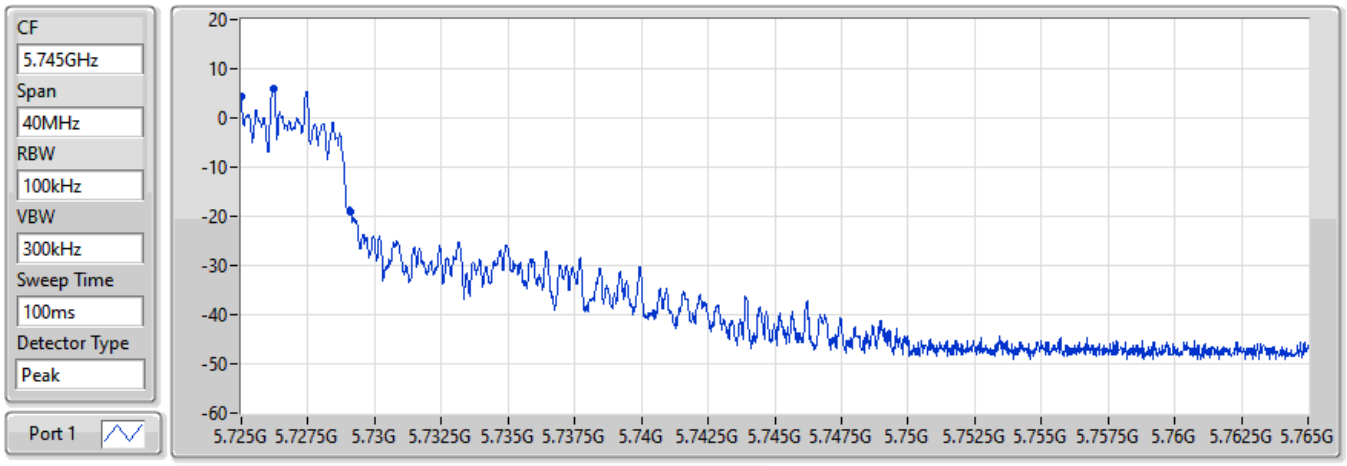


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
4.1M	5.725G	5.7291G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5745MHz

03/06/2022

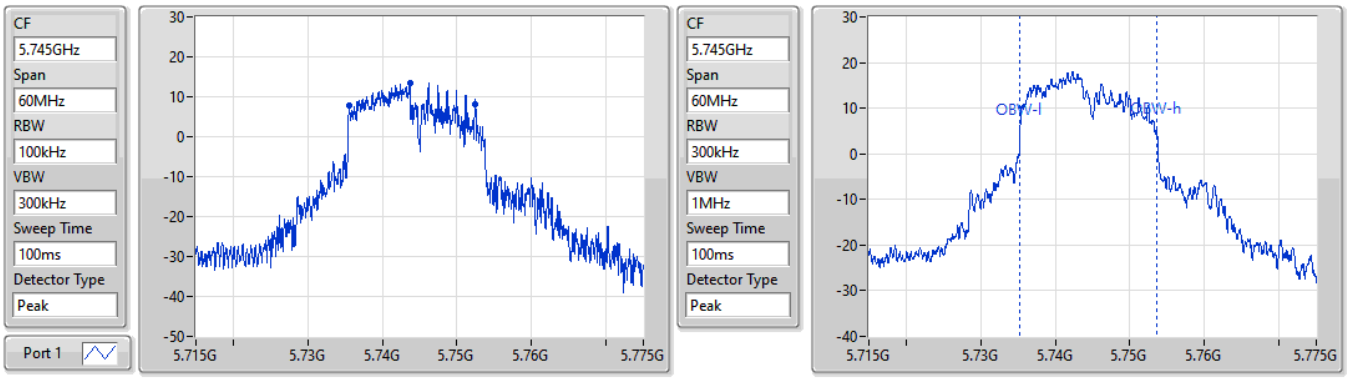


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.98M	5.73552G	5.7525G	18.381M	5.735255G	5.753636G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5745MHz

03/06/2022

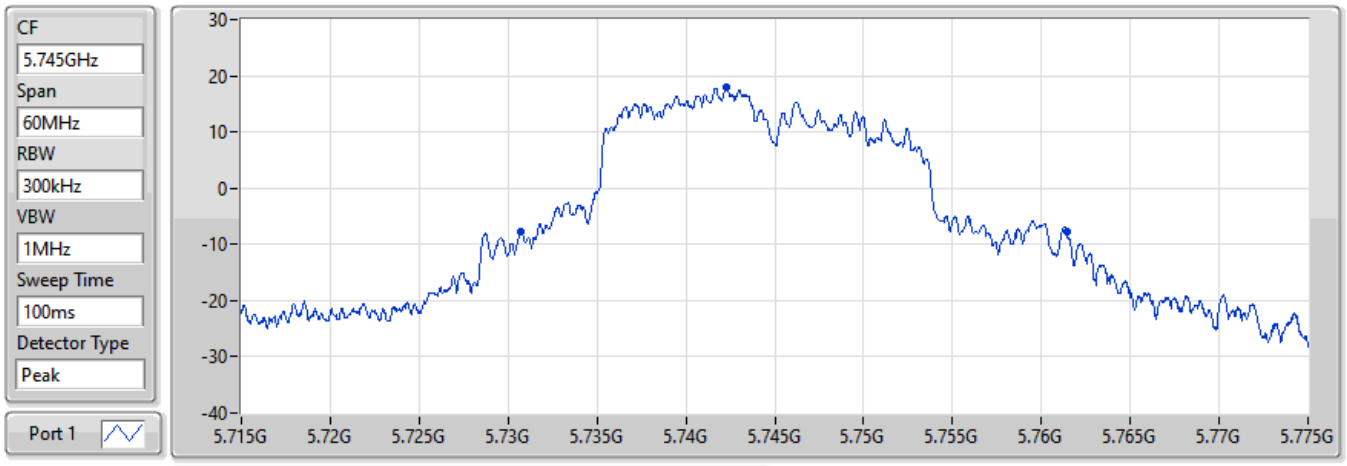


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
30.72M	5.73069G	5.76141G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5785MHz

03/06/2022

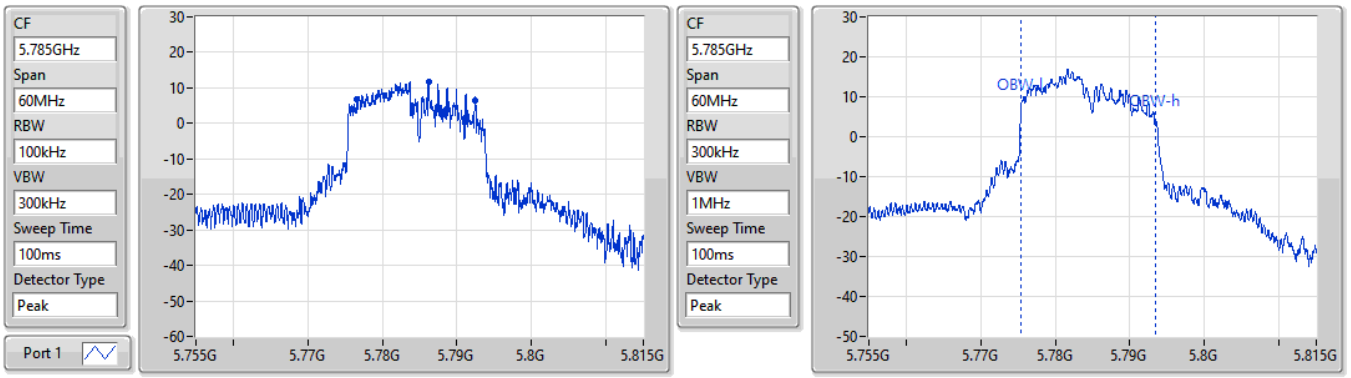


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.9M	5.7766G	5.7925G	17.991M	5.775405G	5.793396G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5785MHz


03/06/2022

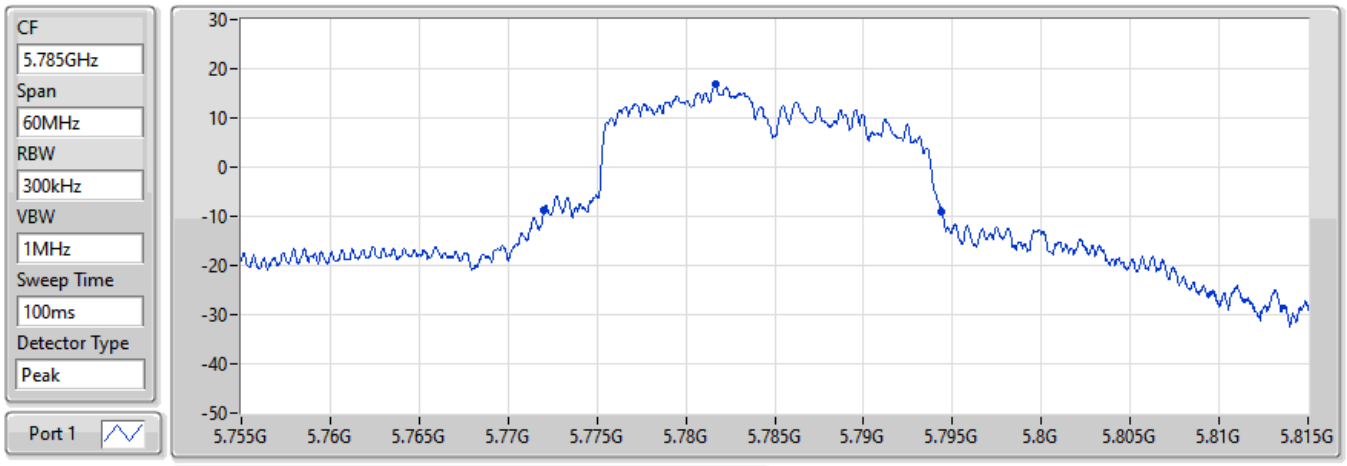

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
22.38M	5.77201G	5.79439G	Inf	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW


5825MHz

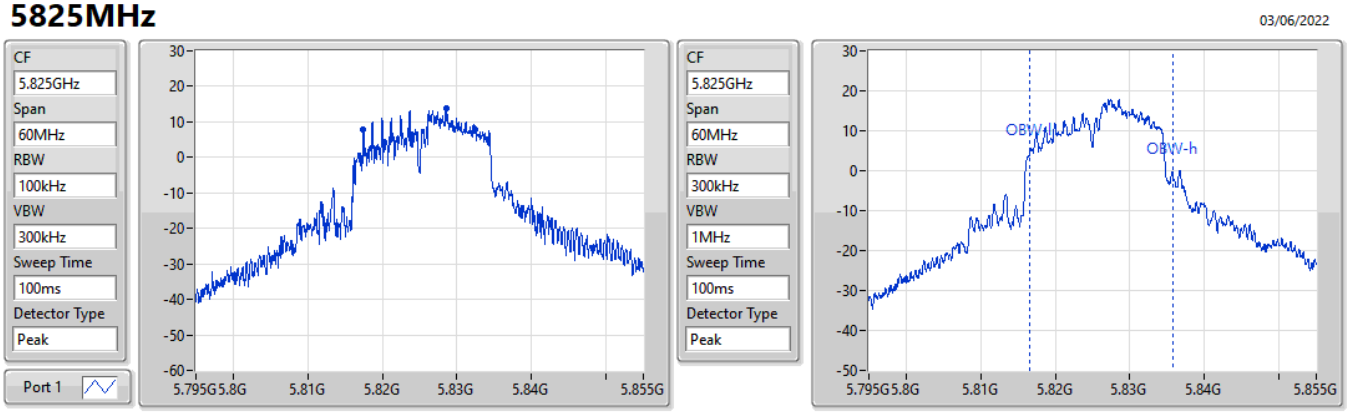

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.09M	5.81741G	5.8325G	19.22M	5.816514G	5.835735G	500k	1

802.11ax HEW20_Nss1,(MCS0)_1TX EBW

5825MHz

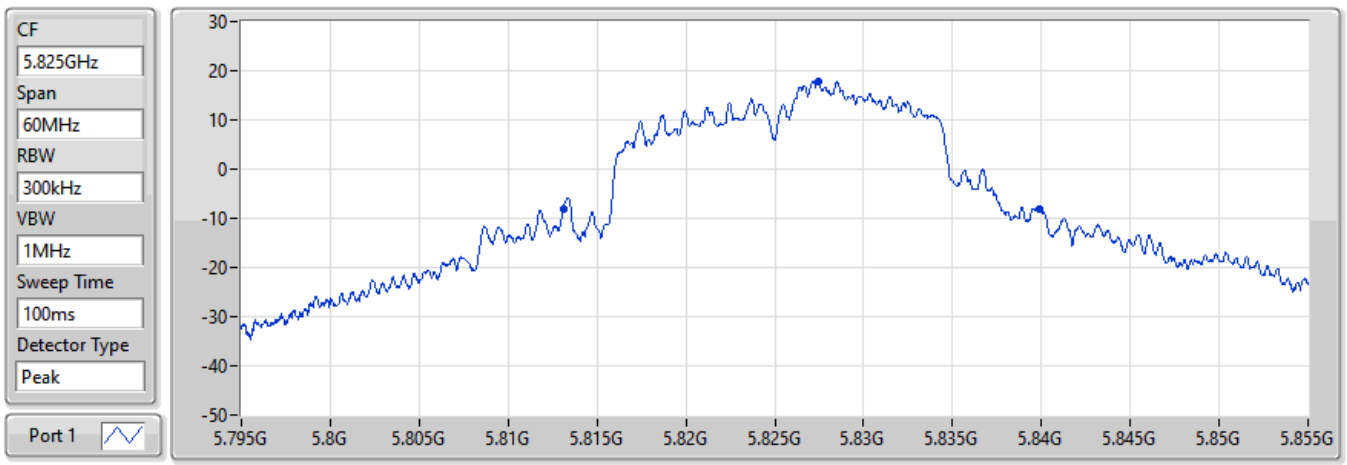

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
26.82M	5.81309G	5.83991G	Inf	1

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.23M	17.931M	17M9D1D	18.57M	17.361M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.26M	17.781M	17M8D1D	19.05M	17.271M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.26M	17.751M	17M8D1D	15.12M	14.333M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	14.49M	17.901M	17M9D1D	2.54M	3.838M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	19.17M	17.481M	19.23M	17.361M
5200MHz	Pass	Inf	18.9M	17.481M	18.57M	17.511M
5240MHz	Pass	Inf	19.2M	17.841M	19.23M	17.931M
5260MHz	Pass	Inf	19.05M	17.271M	19.26M	17.481M
5300MHz	Pass	Inf	19.2M	17.661M	19.2M	17.571M
5320MHz	Pass	Inf	19.14M	17.511M	19.2M	17.781M
5500MHz	Pass	Inf	19.23M	17.421M	19.14M	17.451M
5580MHz	Pass	Inf	19.08M	17.631M	19.26M	17.661M
5700MHz	Pass	Inf	19.17M	17.661M	19.26M	17.751M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.15M	14.393M	15.12M	14.333M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.68M	3.838M	2.54M	3.878M
5745MHz	Pass	500k	14.49M	17.631M	14.43M	17.781M
5785MHz	Pass	500k	14.49M	17.511M	13.2M	17.901M
5825MHz	Pass	500k	13.23M	17.631M	14.49M	17.691M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5180MHz

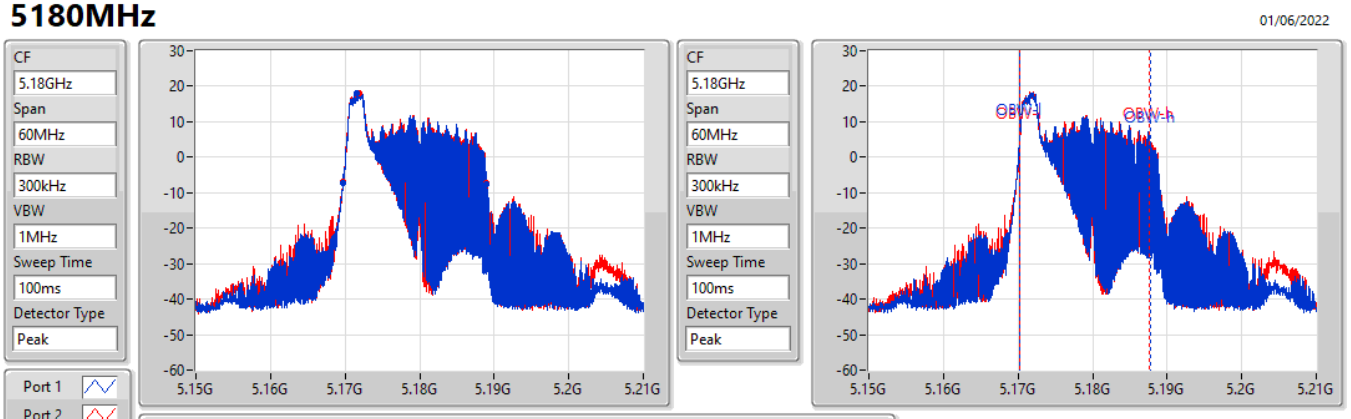

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.169776	5.188946	17.481M	5.170285G	5.187766G	Inf	1
19.23M	5.169716	5.188946	17.361M	5.170285G	5.187646G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5200MHz

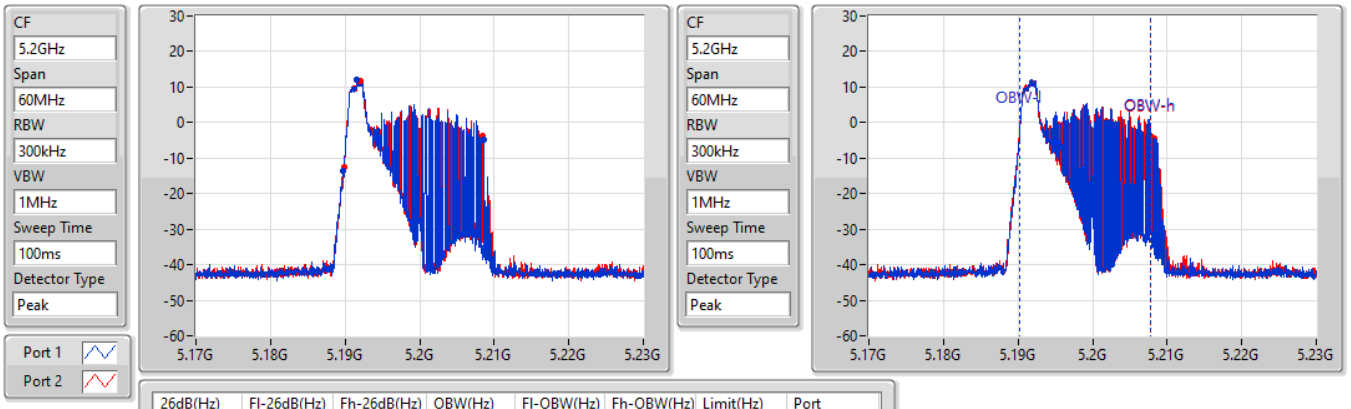


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.9M	5.189776	5.208676	17.481M	5.190285G	5.207766G	Inf	1
18.57M	5.189866	5.208436	17.511M	5.190285G	5.207796G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5240MHz

01/06/2022

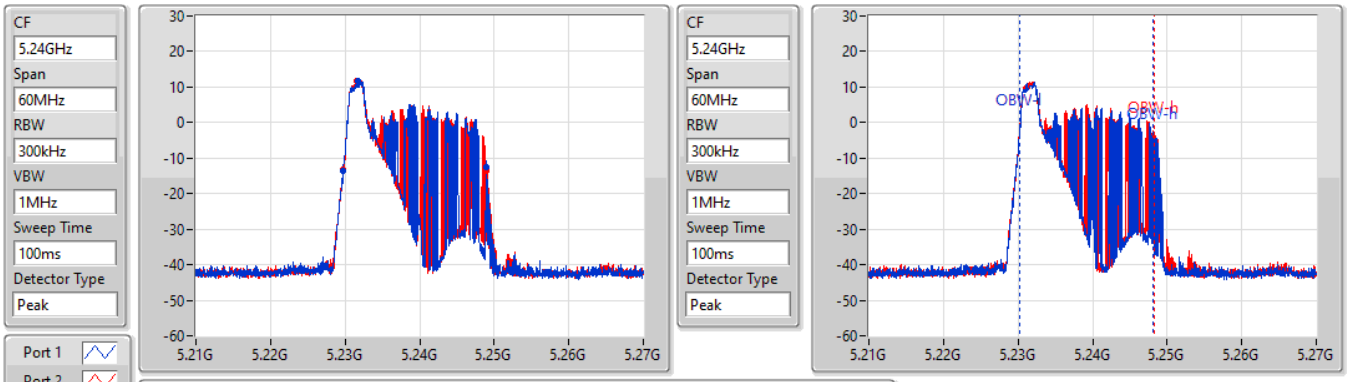


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.2M	5.22974G	5.24894G	17.841M	5.230285G	5.248126G	Inf	1
19.23M	5.22977G	5.249G	17.931M	5.230285G	5.248216G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5260MHz

01/06/2022

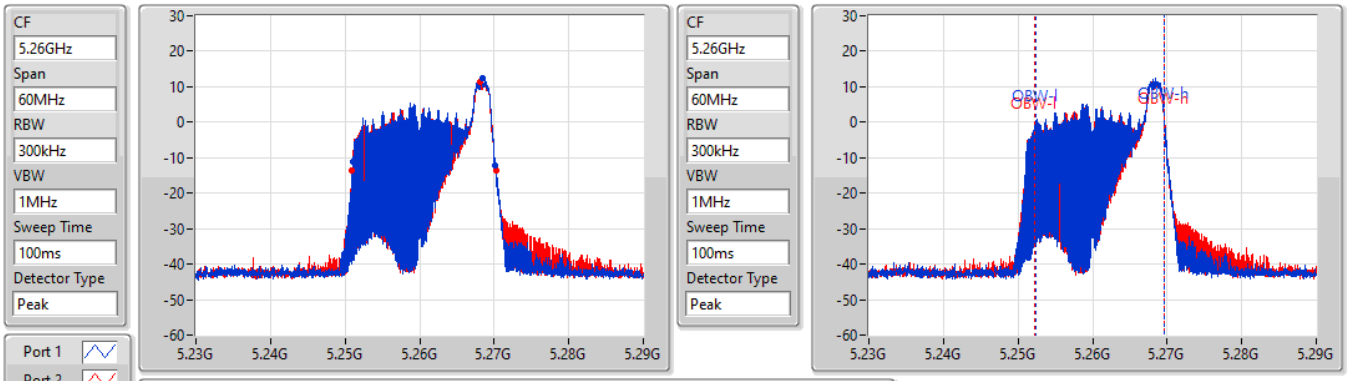


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.05M	5.25106G	5.27011G	17.271M	5.252384G	5.269655G	Inf	1
19.26M	5.25094G	5.2702G	17.481M	5.252204G	5.269685G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5300MHz

01/06/2022

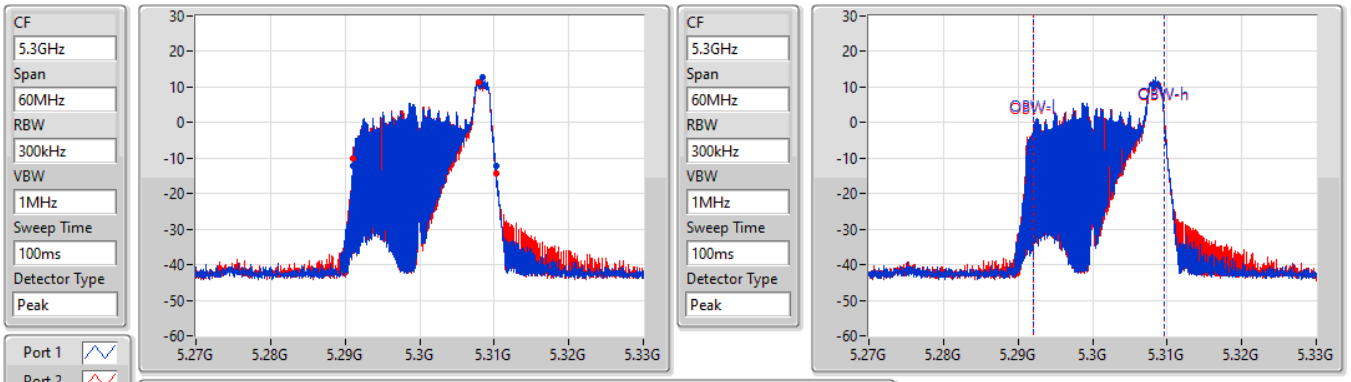


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.2M	5.291G	5.3102G	17.661M	5.291994G	5.309655G	Inf	1
19.2M	5.29103G	5.31023G	17.571M	5.292084G	5.309655G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5320MHz

01/06/2022

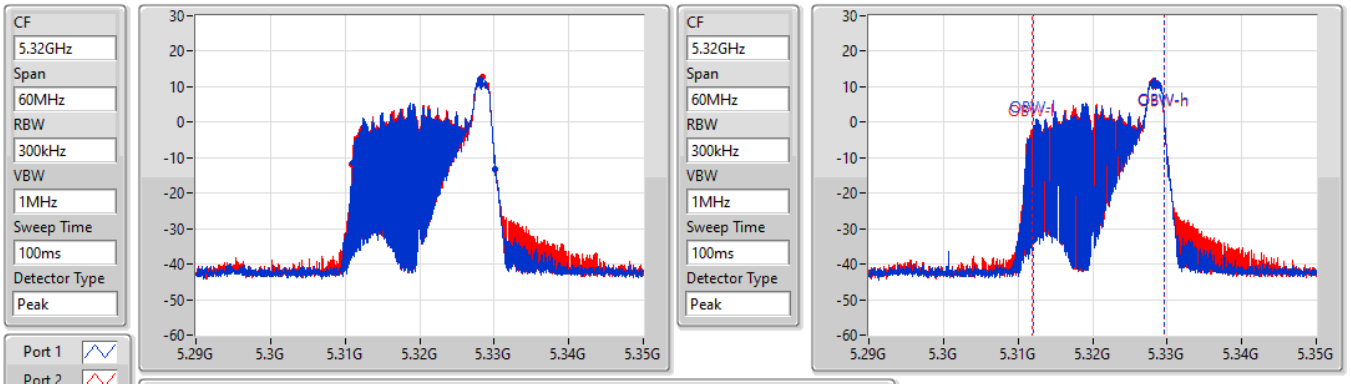


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.14M	5.311G	5.33014G	17.511M	5.312114G	5.329625G	Inf	1
19.2M	5.31097G	5.33017G	17.781M	5.311874G	5.329655G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5500MHz

01/06/2022

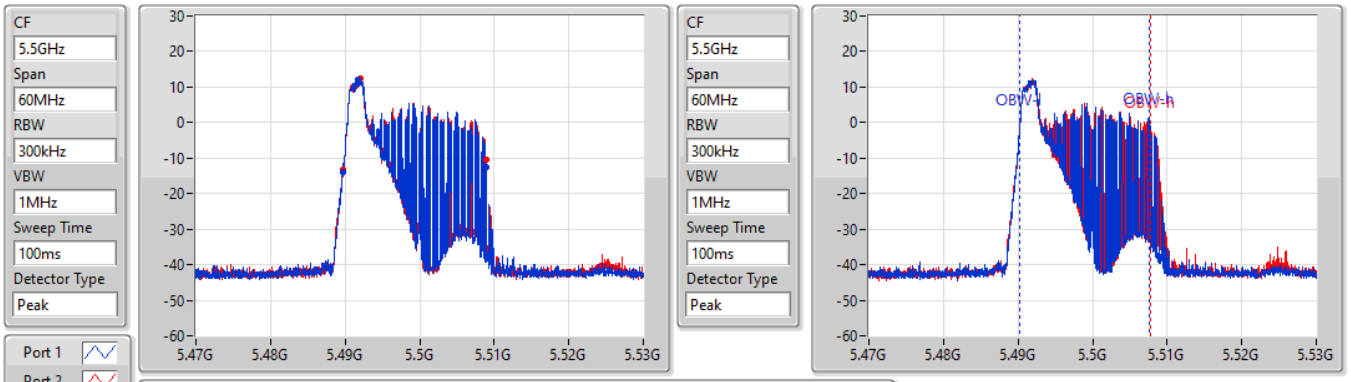


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.23M	5.48968G	5.50891G	17.421M	5.490255G	5.507676G	Inf	1
19.14M	5.48974G	5.50888G	17.451M	5.490255G	5.507706G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5580MHz

01/06/2022

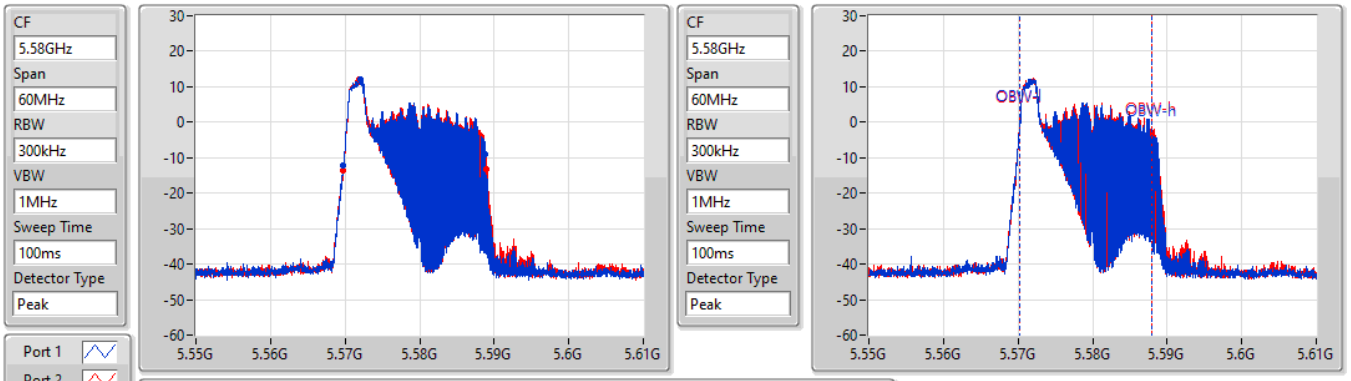


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.56974G	5.58882G	17.631M	5.570285G	5.587916G	Inf	1
19.26M	5.56971G	5.58897G	17.661M	5.570285G	5.587946G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5700MHz

01/06/2022

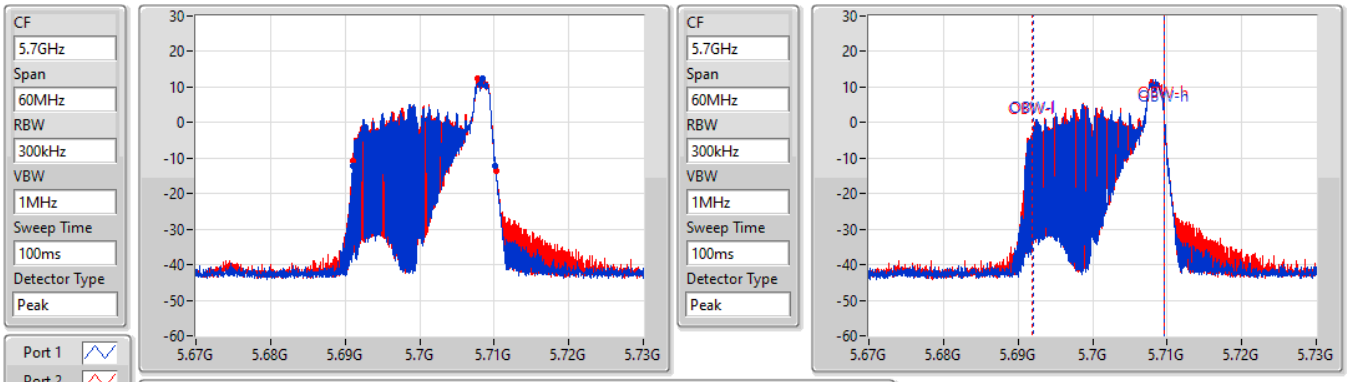


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.691G	5.71017G	17.661M	5.691994G	5.709655G	Inf	1
19.26M	5.691G	5.71026G	17.751M	5.691904G	5.709655G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.47-5.725GHz

04/06/2022

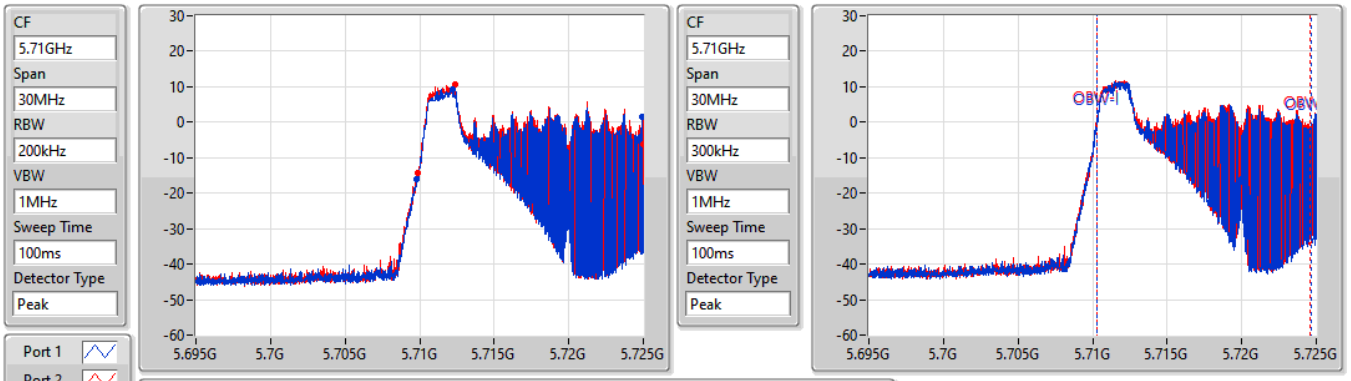


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.15M	5.709805G	5.724955G	14.393M	5.710255G	5.724648G	Inf	1
15.12M	5.709865G	5.724985G	14.333M	5.710255G	5.724588G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

04/06/2022

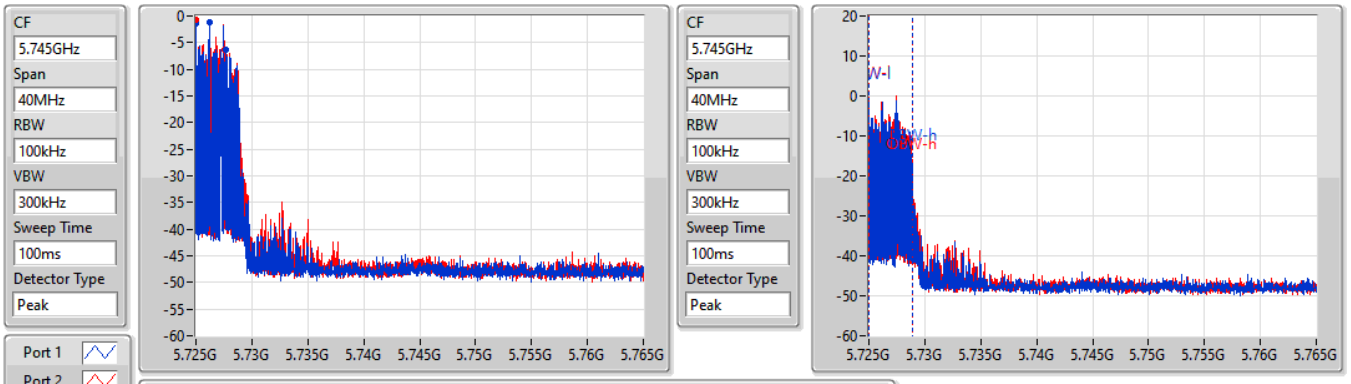


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.68M	5.725G	5.72768G	3.838M	5.72501G	5.728848G	500k	1
2.54M	5.725G	5.72754G	3.878M	5.72501G	5.728888G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz


04/06/2022

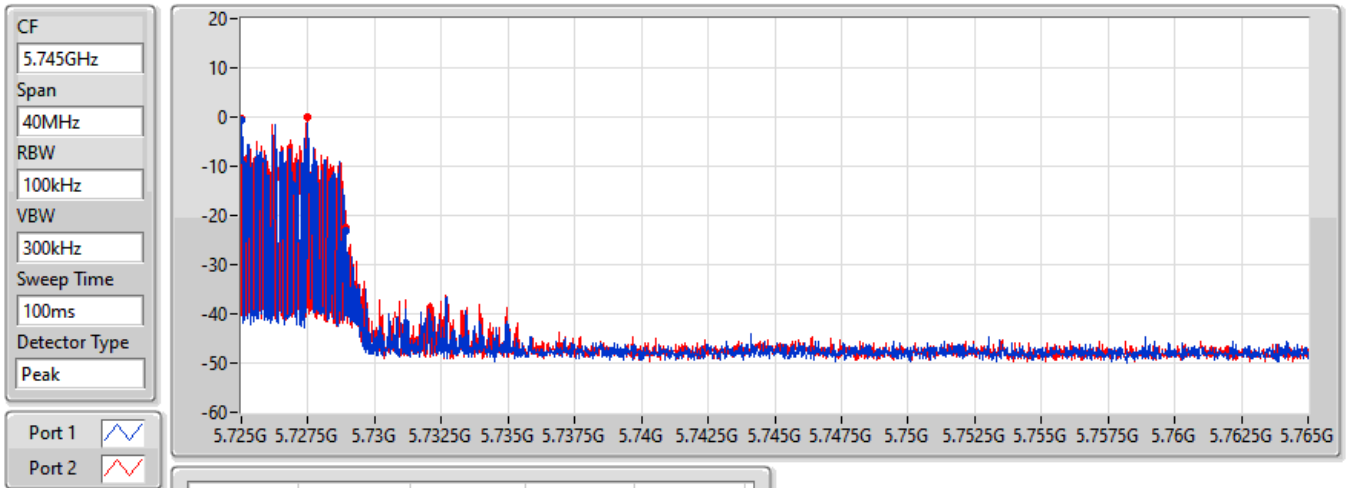

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
3.94M	5.725G	5.72894G	Inf	1
3.94M	5.725G	5.72894G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5745MHz

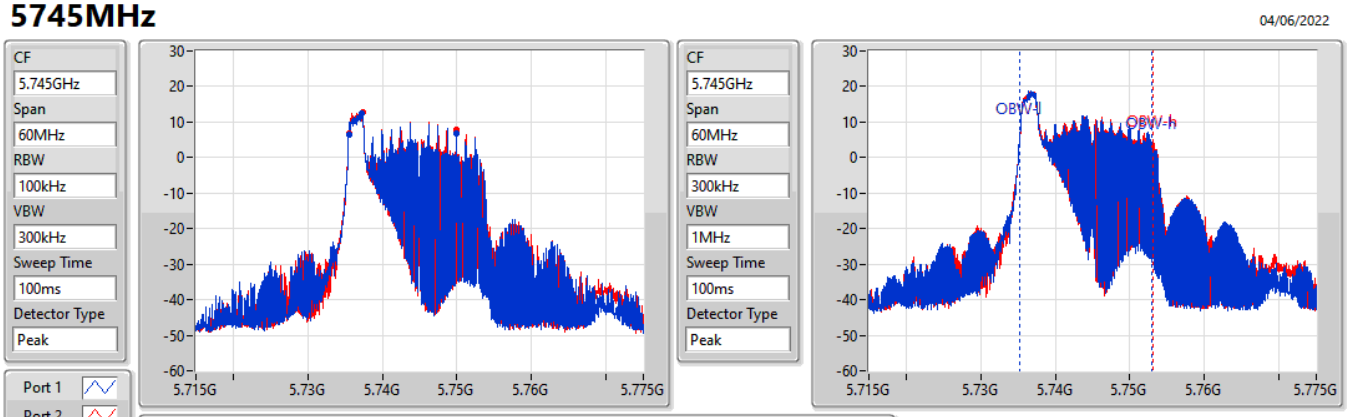

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.49M	5.73549G	5.74998G	17.631M	5.735255G	5.752886G	500k	1
14.43M	5.73549G	5.74992G	17.781M	5.735255G	5.753036G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

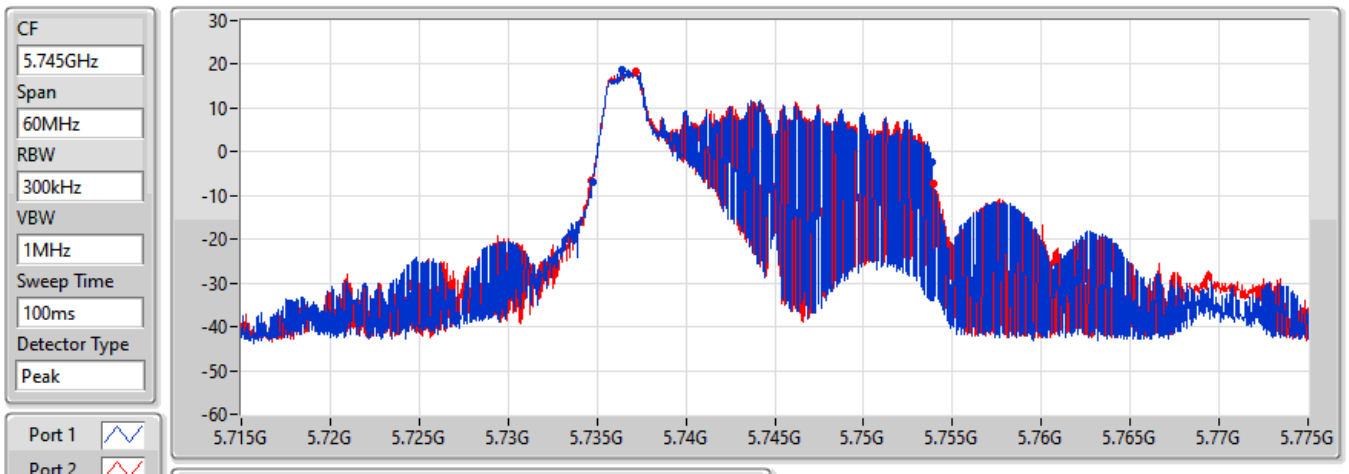


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.08M	5.73474G	5.75382G	Inf	1
19.29M	5.73468G	5.75397G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz

04/06/2022

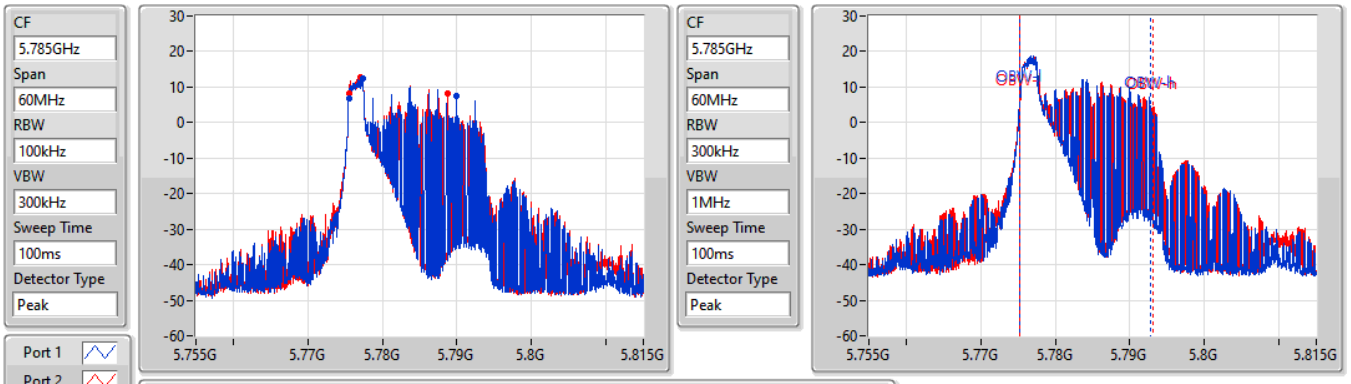


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.49M	5.77549G	5.78998G	17.511M	5.775255G	5.792766G	500k	1
13.2M	5.77552G	5.78872G	17.901M	5.775255G	5.793156G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz

04/06/2022

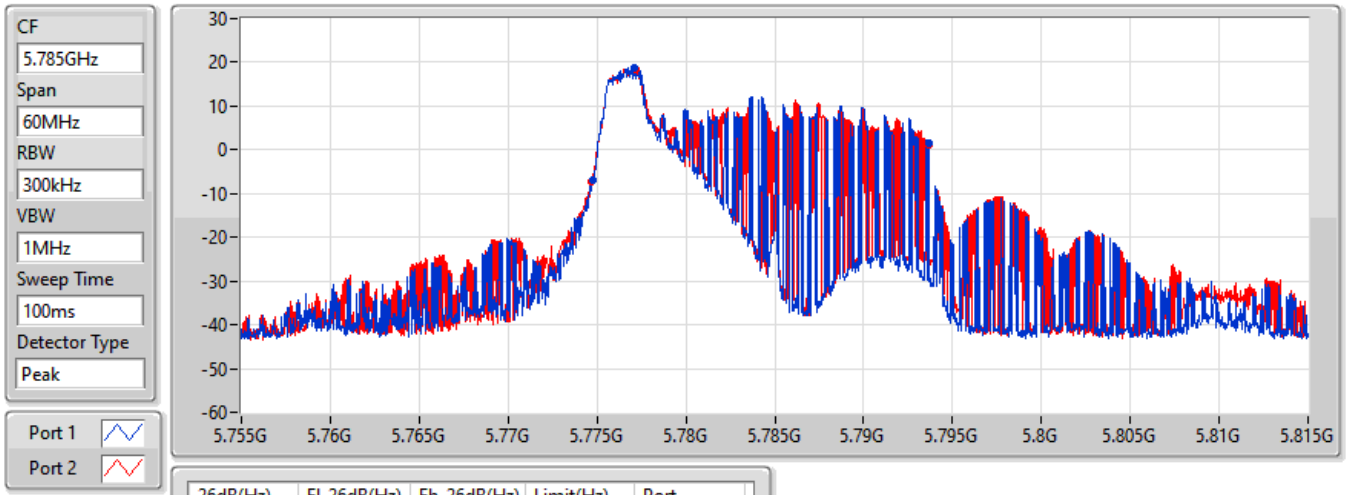


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
18.9M	5.77474G	5.79364G	Inf	1
18.99M	5.77468G	5.79367G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz

04/06/2022

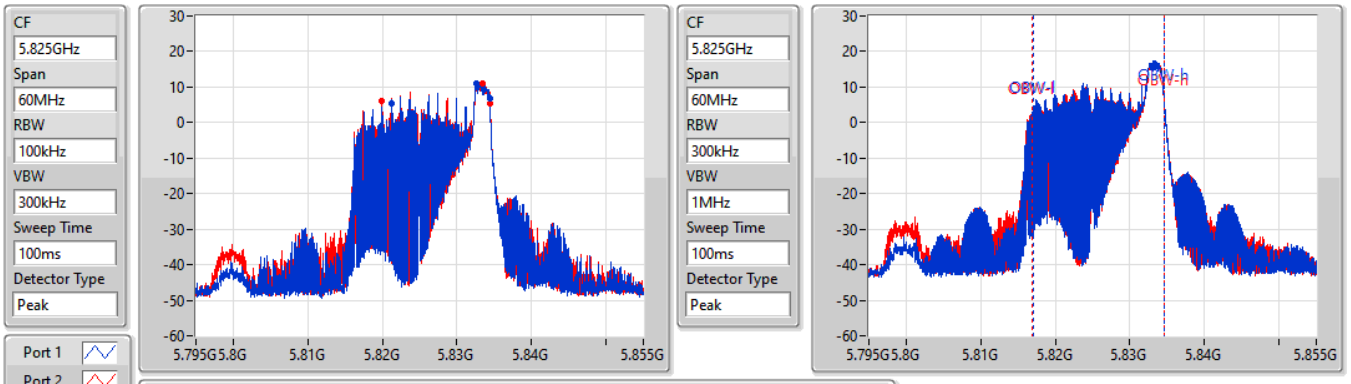


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
13.23M	5.82116G	5.83439G	17.631M	5.816994G	5.834625G	500k	1
14.49M	5.81993G	5.83442G	17.691M	5.816964G	5.834655G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz

04/06/2022

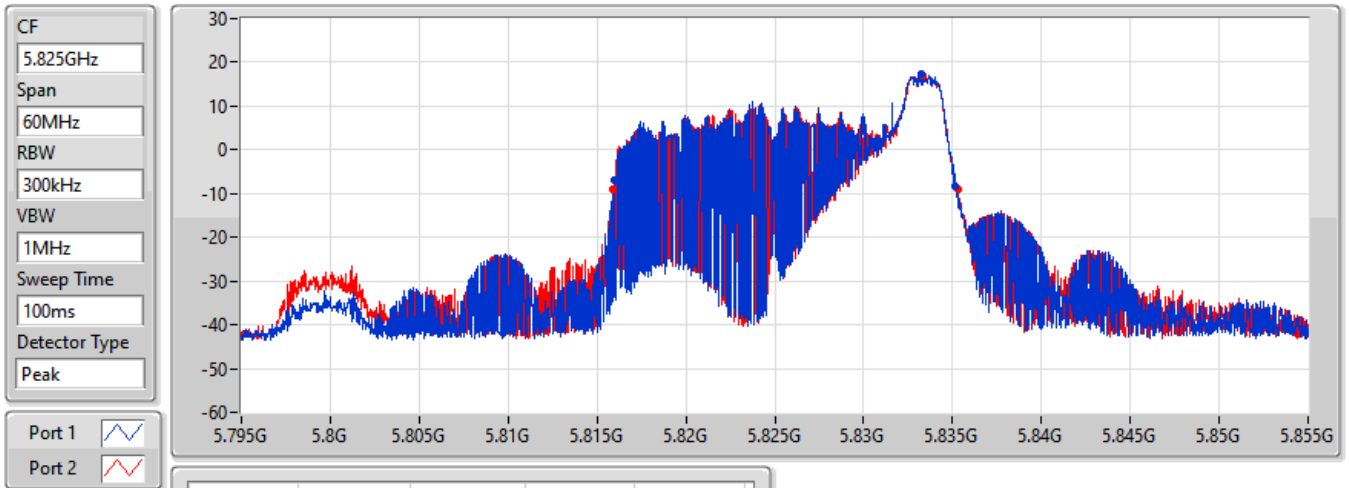

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.2M	5.81597G	5.83517G	Inf	1
19.38M	5.81591G	5.83529G	Inf	2

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.08M	17.781M	17M8D1D	19.05M	17.691M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.23M	17.841M	17M8D1D	19.14M	17.811M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.17M	17.841M	17M8D1D	14.94M	14.408M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	16.98M	17.991M	18M0D1D	2.52M	3.818M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	19.08M	17.721M	19.08M	17.781M
5200MHz	Pass	Inf	19.08M	17.691M	19.05M	17.781M
5240MHz	Pass	Inf	19.08M	17.691M	19.08M	17.781M
5260MHz	Pass	Inf	19.23M	17.841M	19.14M	17.841M
5300MHz	Pass	Inf	19.2M	17.841M	19.17M	17.841M
5320MHz	Pass	Inf	19.2M	17.811M	19.17M	17.841M
5500MHz	Pass	Inf	19.11M	17.721M	19.08M	17.781M
5580MHz	Pass	Inf	19.08M	17.691M	19.05M	17.751M
5700MHz	Pass	Inf	19.17M	17.811M	19.14M	17.841M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.03M	14.438M	14.94M	14.408M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.52M	3.818M	2.54M	3.858M
5745MHz	Pass	500k	16.95M	17.781M	16.98M	17.901M
5785MHz	Pass	500k	16.98M	17.841M	16.98M	17.991M
5825MHz	Pass	500k	16.92M	17.991M	15.69M	17.931M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5180MHz

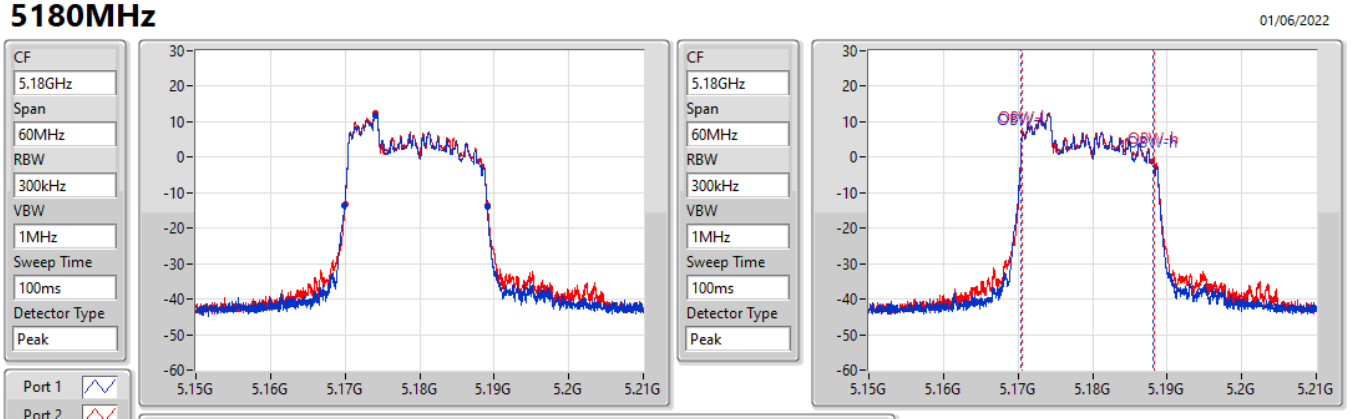

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.16995G	5.18903G	17.721M	5.170465G	5.188186G	Inf	1
19.08M	5.17001G	5.18909G	17.781M	5.170495G	5.188276G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5200MHz

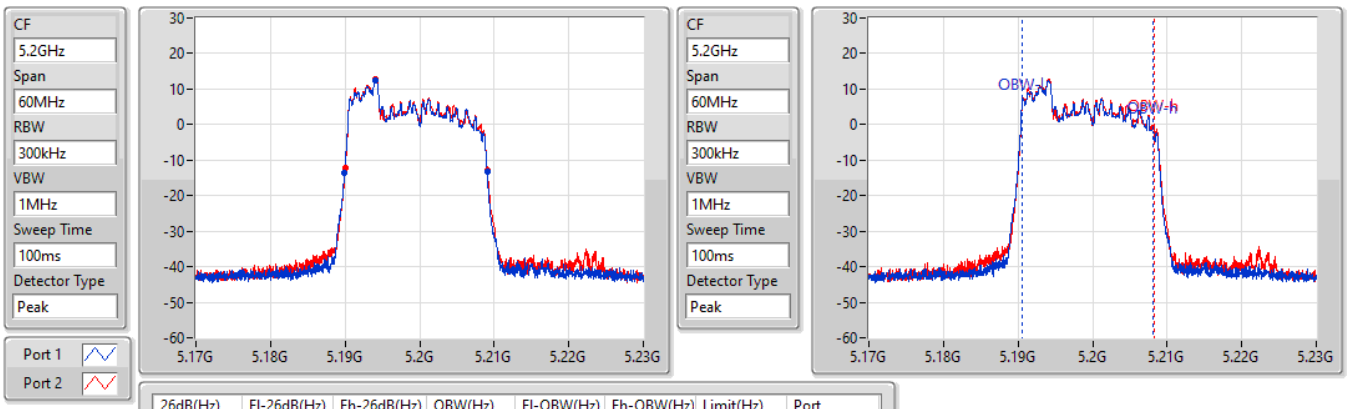


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.18995G	5.20903G	17.691M	5.190495G	5.208186G	Inf	1
19.05M	5.19004G	5.20909G	17.781M	5.190495G	5.208276G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5240MHz

01/06/2022

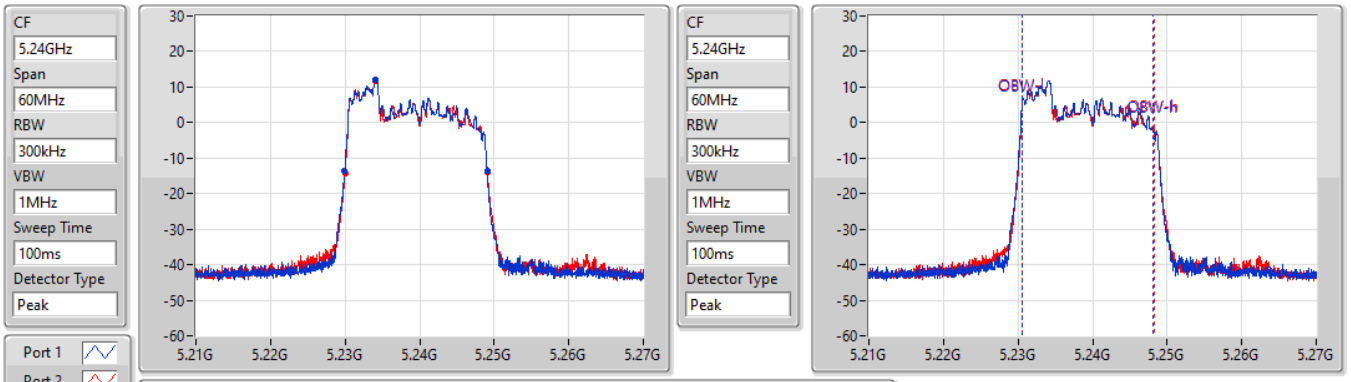


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.22995G	5.24903G	17.691M	5.230495G	5.248186G	Inf	1
19.08M	5.23001G	5.24909G	17.781M	5.230495G	5.248276G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5260MHz

01/06/2022

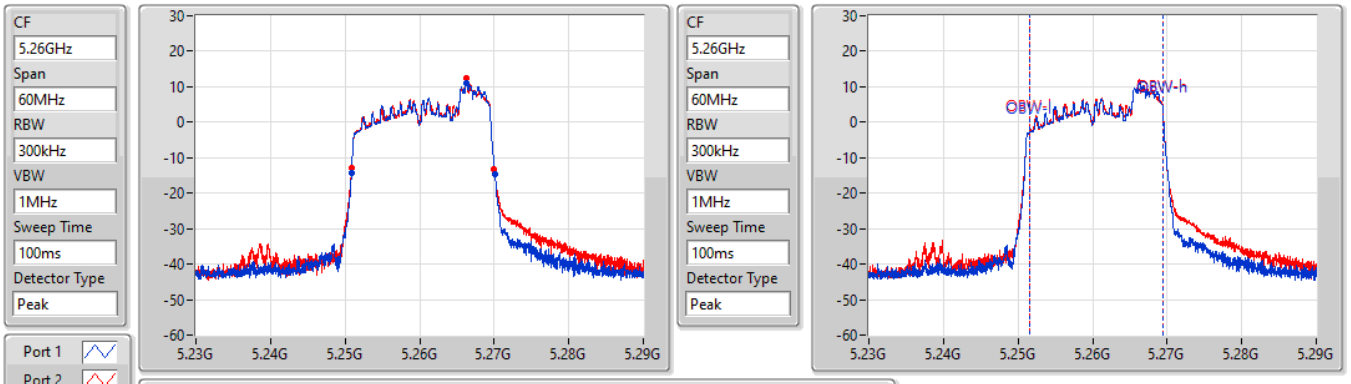


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.23M	5.25088G	5.27011G	17.841M	5.251604G	5.269445G	Inf	1
19.14M	5.25088G	5.27002G	17.841M	5.251604G	5.269445G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5300MHz

01/06/2022

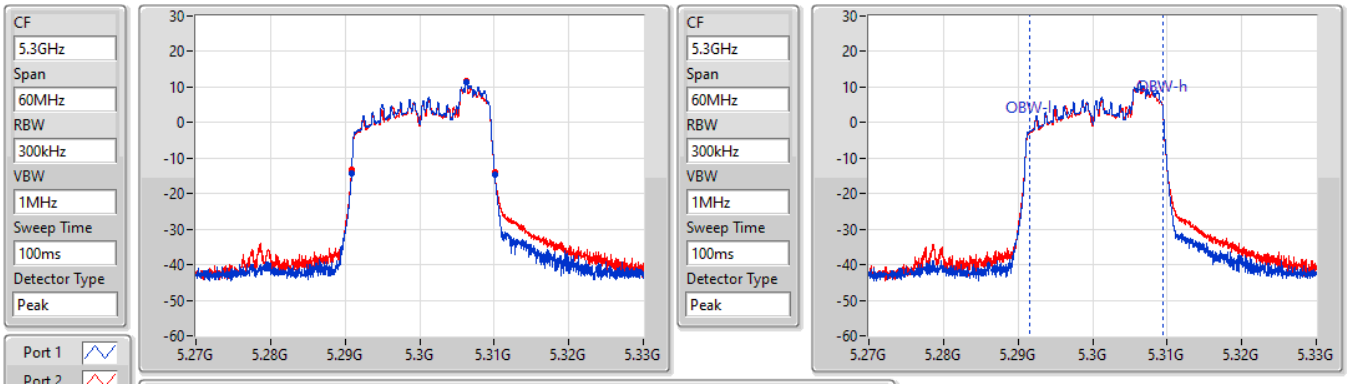


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.2M	5.29088G	5.31008G	17.841M	5.291604G	5.309445G	Inf	1
19.17M	5.29088G	5.31005G	17.841M	5.291604G	5.309445G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5320MHz


01/06/2022

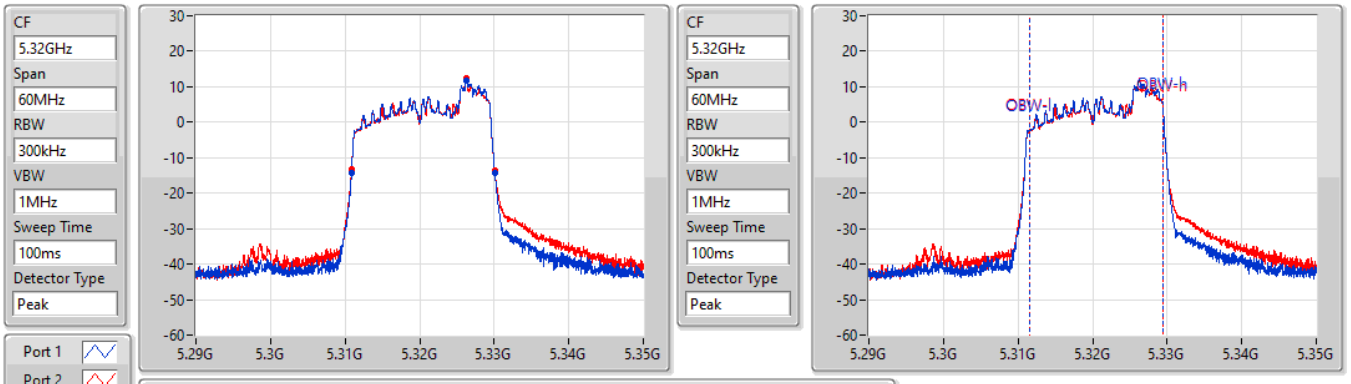

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.2M	5.31088G	5.33008G	17.811M	5.311634G	5.329445G	Inf	1
19.17M	5.31088G	5.33005G	17.841M	5.311634G	5.329475G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5500MHz

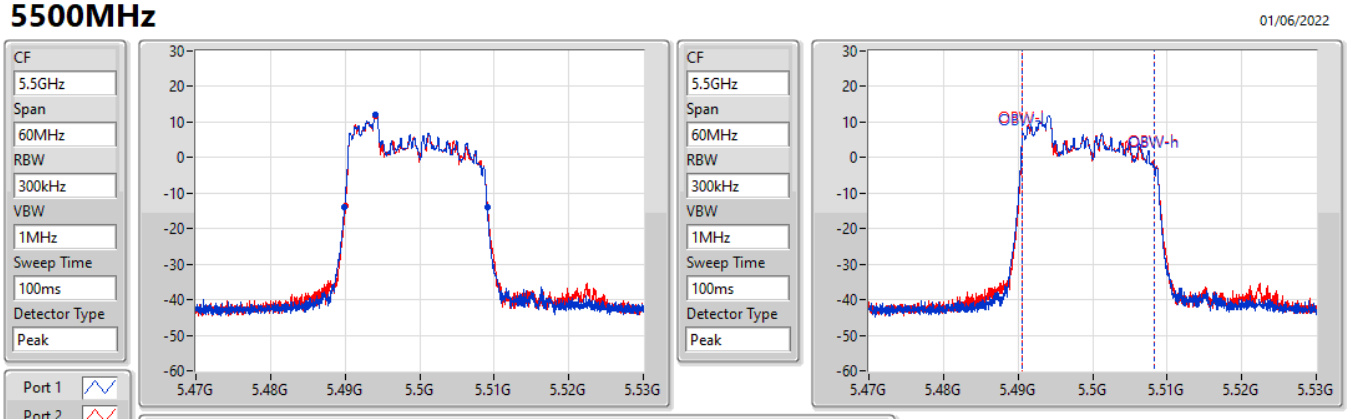

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.48995G	5.50906G	17.721M	5.490495G	5.508216G	Inf	1
19.08M	5.49004G	5.50912G	17.781M	5.490525G	5.508306G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5580MHz

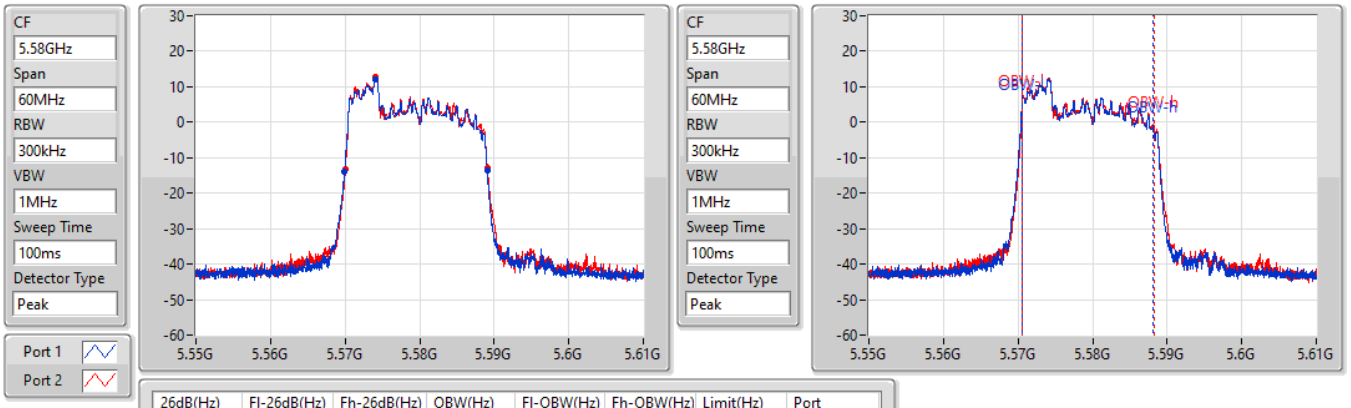


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.56995G	5.58903G	17.691M	5.570495G	5.588186G	Inf	1
19.05M	5.57004G	5.58909G	17.751M	5.570525G	5.588276G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5700MHz

01/06/2022

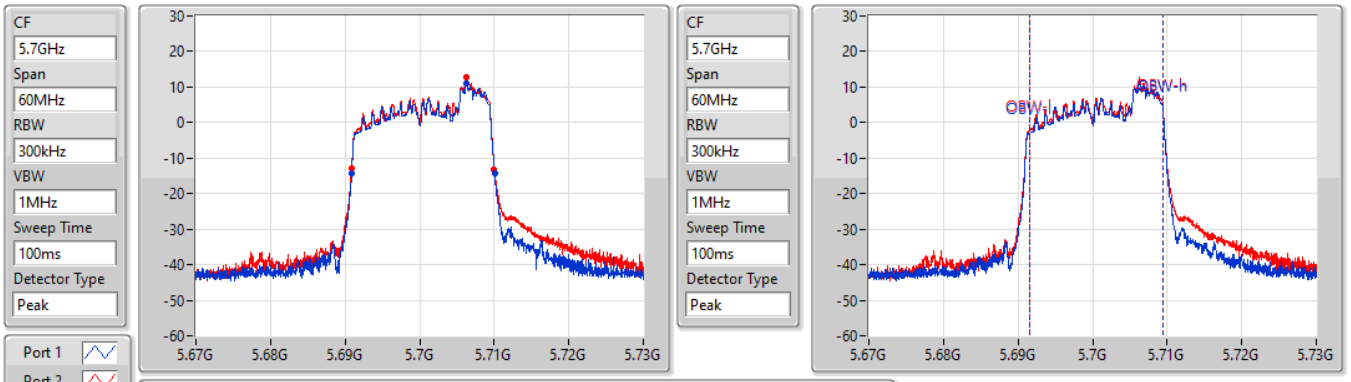


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.69088G	5.71005G	17.811M	5.691634G	5.709445G	Inf	1
19.14M	5.69088G	5.71002G	17.841M	5.691634G	5.709475G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.47-5.725GHz

04/06/2022

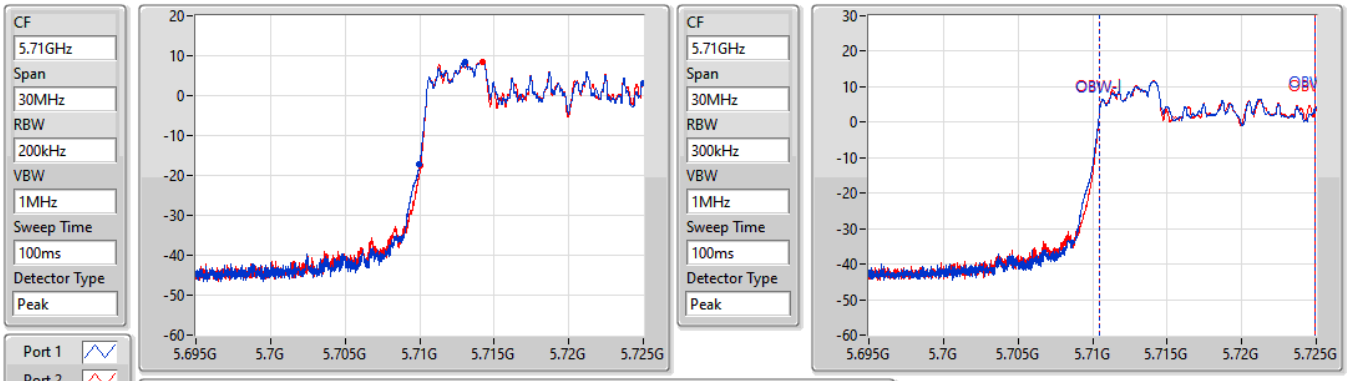


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.03M	5.70997G	5.725G	14.438M	5.710465G	5.724903G	Inf	1
14.94M	5.71006G	5.725G	14.408M	5.71048G	5.724888G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

04/06/2022

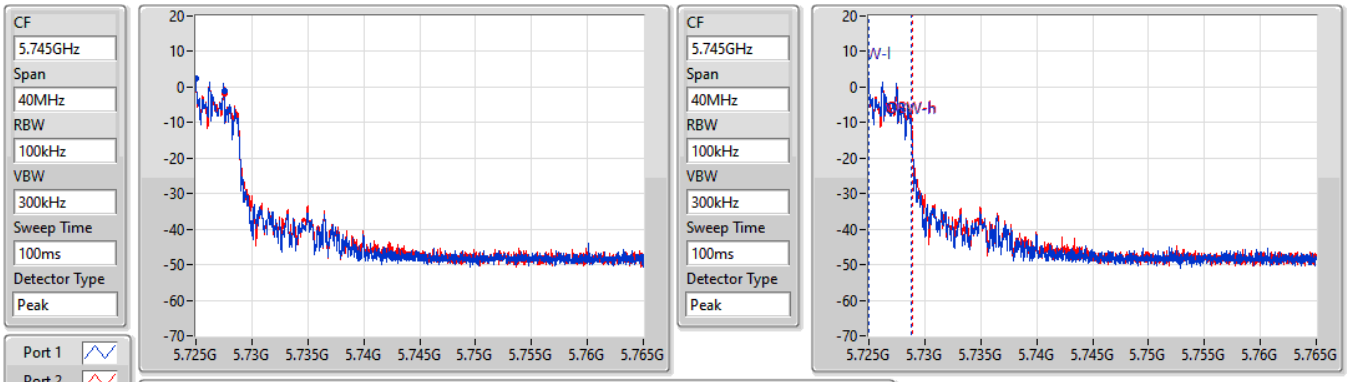


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.52M	5.725G	5.72752G	3.818M	5.72501G	5.728828G	500k	1
2.54M	5.725G	5.72754G	3.858M	5.72501G	5.728868G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz


04/06/2022

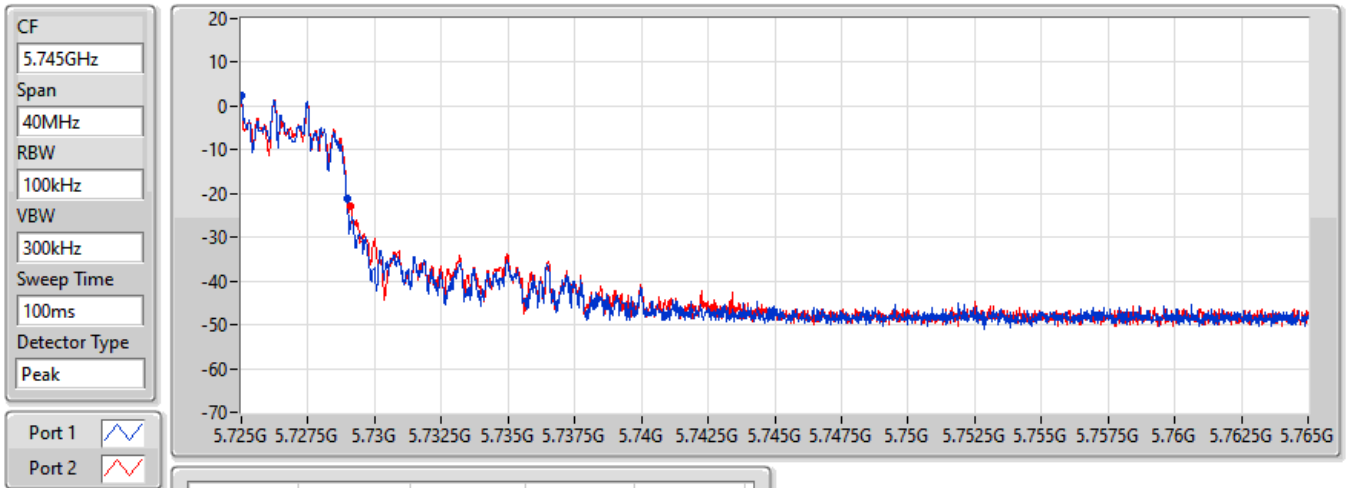

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
3.96M	5.725G	5.72896G	Inf	1
4.1M	5.725G	5.7291G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5745MHz

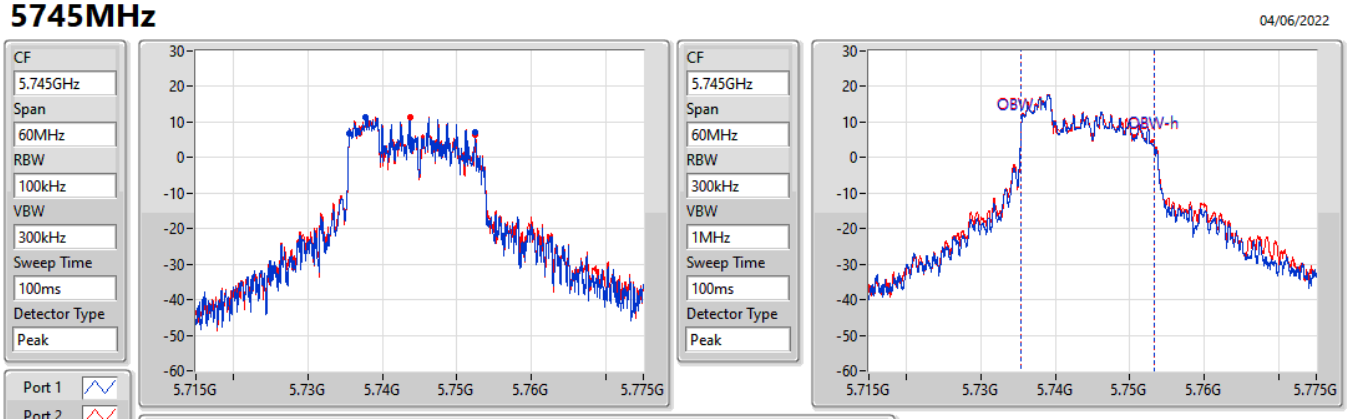

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.95M	5.73552G	5.75247G	17.781M	5.735435G	5.753216G	500k	1
16.98M	5.73552G	5.7525G	17.901M	5.735435G	5.753336G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

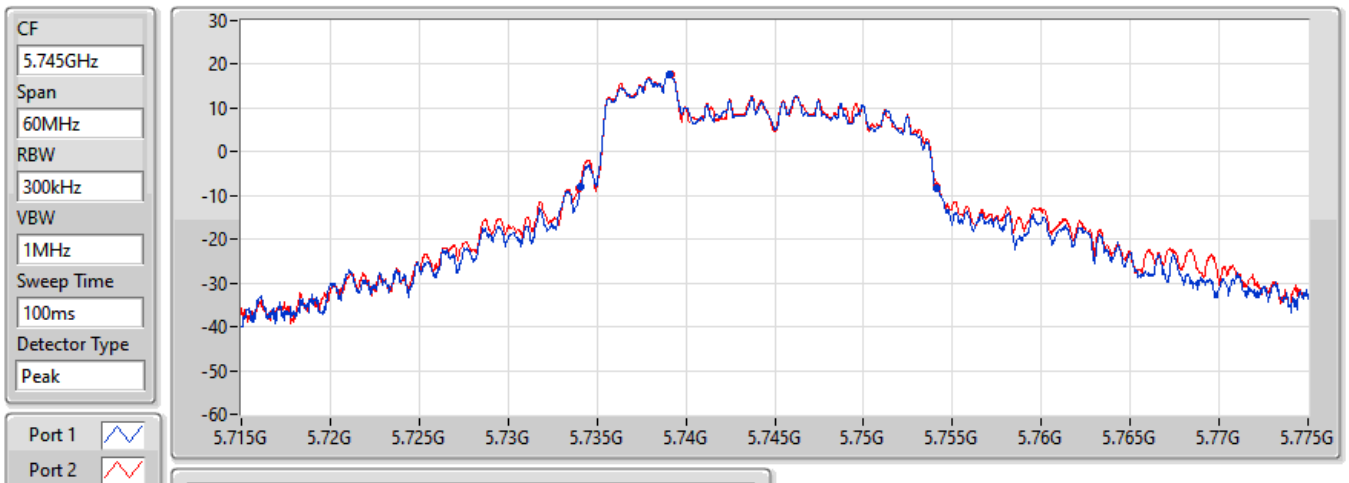


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
20.01M	5.73411G	5.75412G	Inf	1
20.16M	5.73399G	5.75415G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX **EBW**

5785MHz

04/06/2022

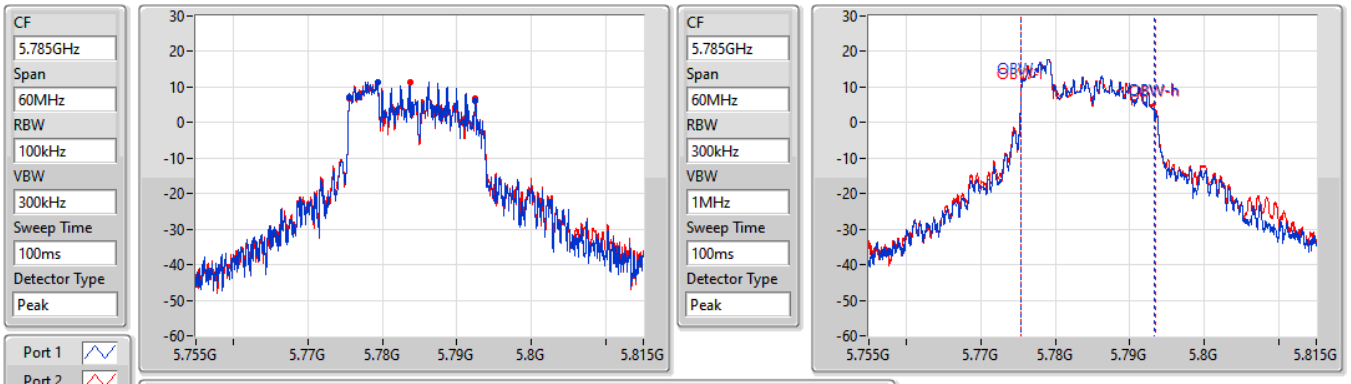


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.98M	5.77552G	5.7925G	17.841M	5.775435G	5.793276G	500k	1
16.98M	5.77552G	5.7925G	17.991M	5.7754O5G	5.793396G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX **EBW**

5785MHz


04/06/2022

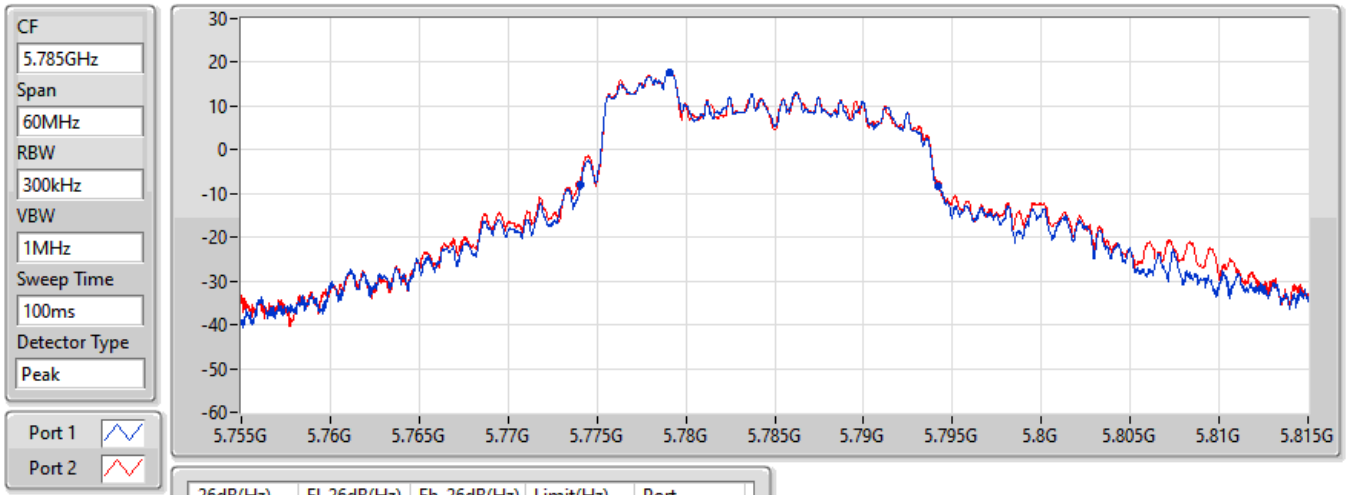

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
20.1M	5.77408G	5.79418G	Inf	1
20.19M	5.77399G	5.79418G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5825MHz

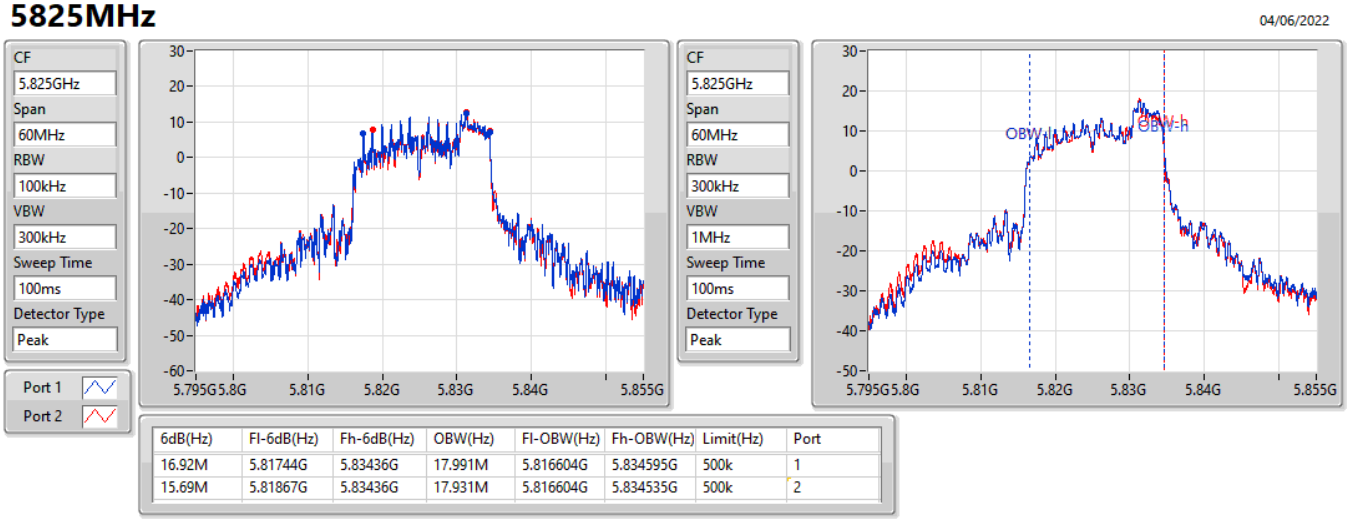

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.92M	5.81744G	5.83436G	17.991M	5.816604G	5.834595G	500k	1
15.69M	5.81867G	5.83436G	17.931M	5.816604G	5.834535G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz

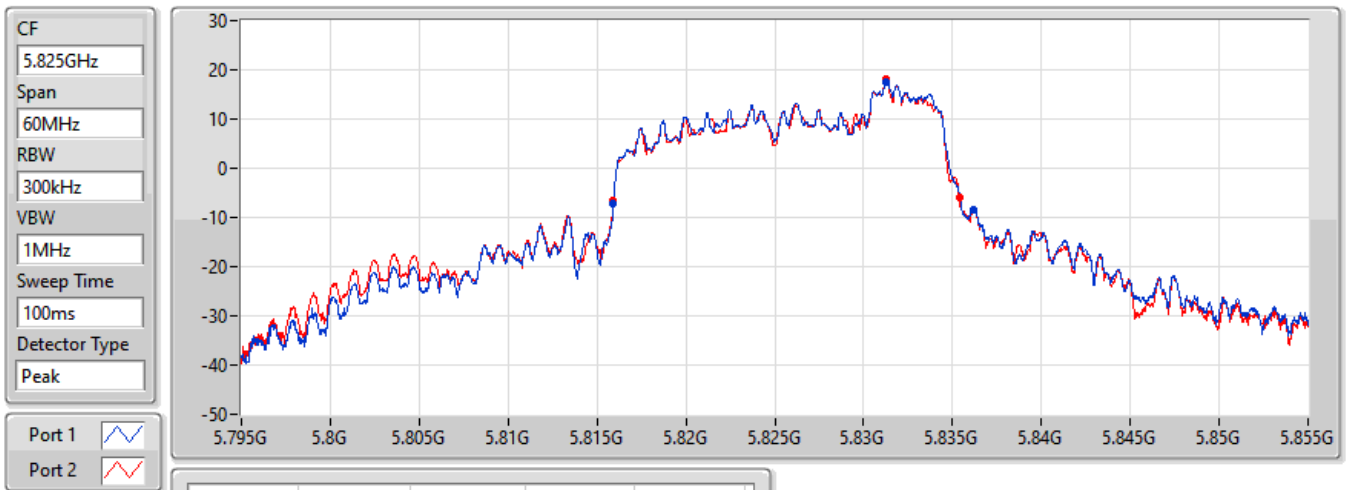

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
20.25M	5.81591G	5.83616G	Inf	1
19.5M	5.81591G	5.83541G	Inf	2

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.05M	17.721M	17M7D1D	18.96M	17.601M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.17M	17.751M	17M8D1D	19.02M	17.691M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.14M	17.751M	17M8D1D	14.85M	14.363M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	16.95M	18.081M	18M1D1D	2.52M	3.778M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	19.05M	17.631M	19.05M	17.721M
5200MHz	Pass	Inf	19.02M	17.601M	19.05M	17.691M
5240MHz	Pass	Inf	19.02M	17.631M	18.96M	17.661M
5260MHz	Pass	Inf	19.14M	17.691M	19.17M	17.721M
5300MHz	Pass	Inf	19.11M	17.691M	19.05M	17.691M
5320MHz	Pass	Inf	19.11M	17.691M	19.02M	17.751M
5500MHz	Pass	Inf	19.05M	17.631M	18.93M	17.601M
5580MHz	Pass	Inf	19.02M	17.631M	19.08M	17.721M
5700MHz	Pass	Inf	19.14M	17.691M	18.96M	17.751M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	14.865M	14.393M	14.85M	14.363M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.52M	3.778M	2.52M	3.818M
5745MHz	Pass	500k	16.95M	17.901M	16.95M	18.081M
5785MHz	Pass	500k	16.92M	17.931M	16.95M	18.081M
5825MHz	Pass	500k	16.89M	18.021M	15.06M	18.081M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5180MHz

21/05/2022

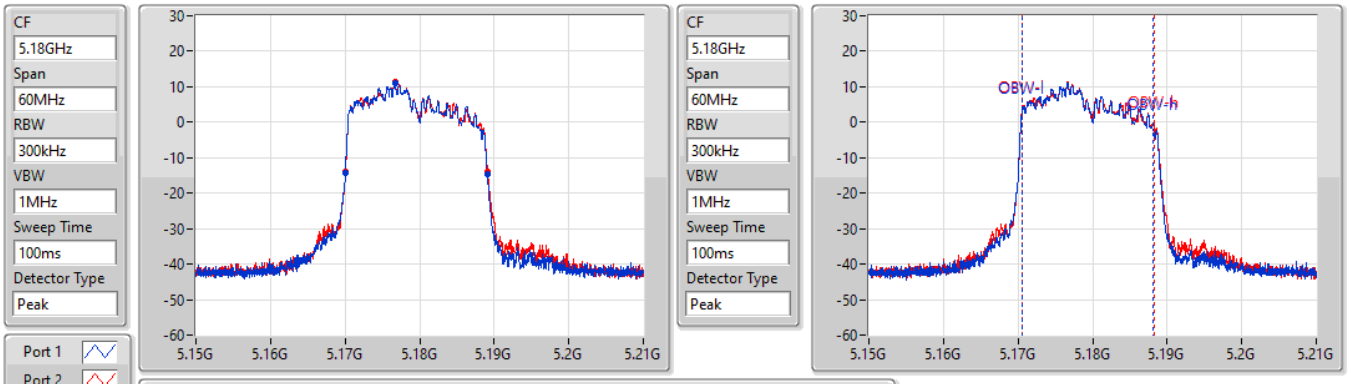


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.05M	5.17004G	5.18909G	17.631M	5.170525G	5.188156G	Inf	1
19.05M	5.17007G	5.18912G	17.721M	5.170525G	5.188246G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5200MHz


21/05/2022

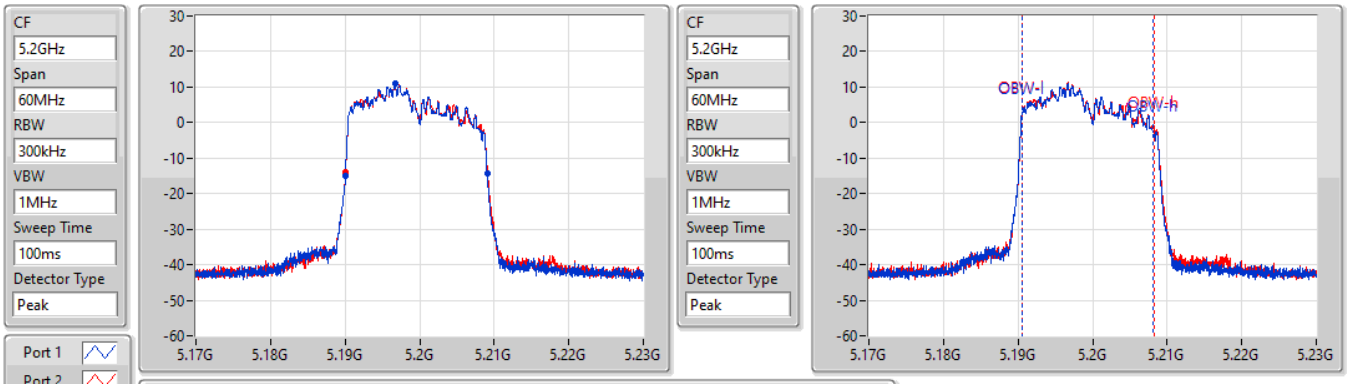

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.02M	5.19004G	5.20906G	17.601M	5.190555G	5.208156G	Inf	1
19.05M	5.19007G	5.20912G	17.691M	5.190555G	5.208246G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5240MHz

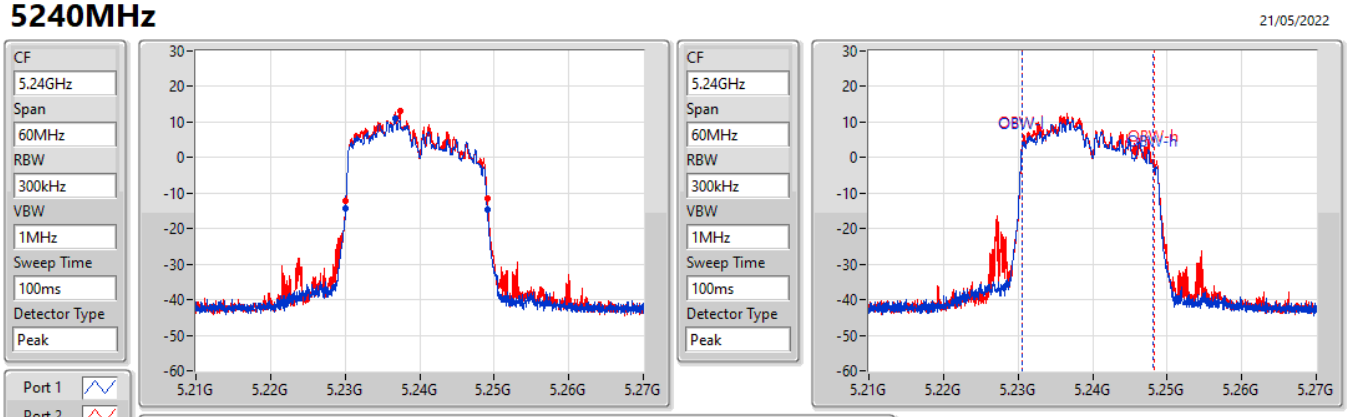

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.02M	5.23007G	5.24909G	17.631M	5.230555G	5.248186G	Inf	1
18.96M	5.23013G	5.24909G	17.661M	5.230555G	5.248216G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5260MHz

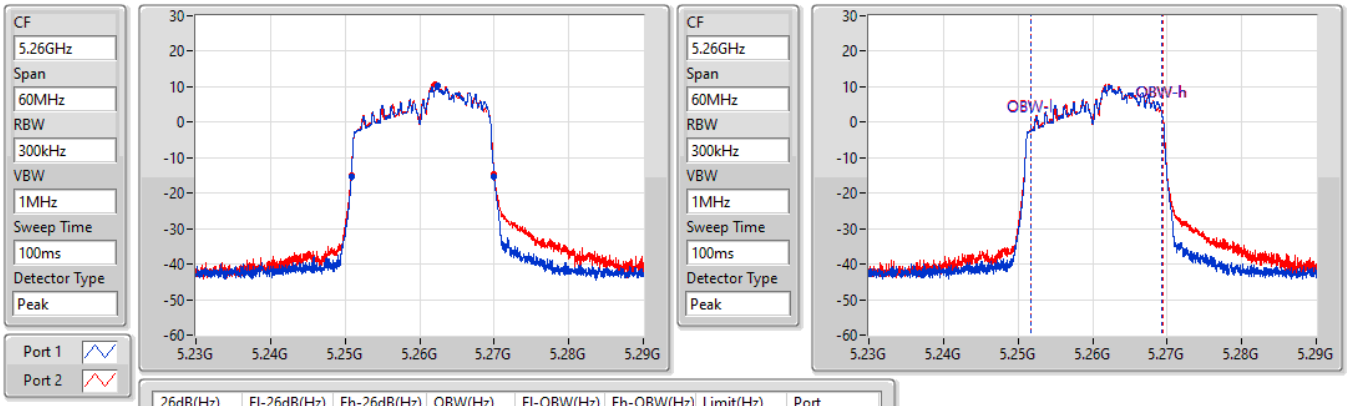


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.14M	5.25085G	5.26999G	17.691M	5.251664G	5.269355G	Inf	1
19.17M	5.25082G	5.26999G	17.721M	5.251664G	5.269385G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5300MHz

21/05/2022

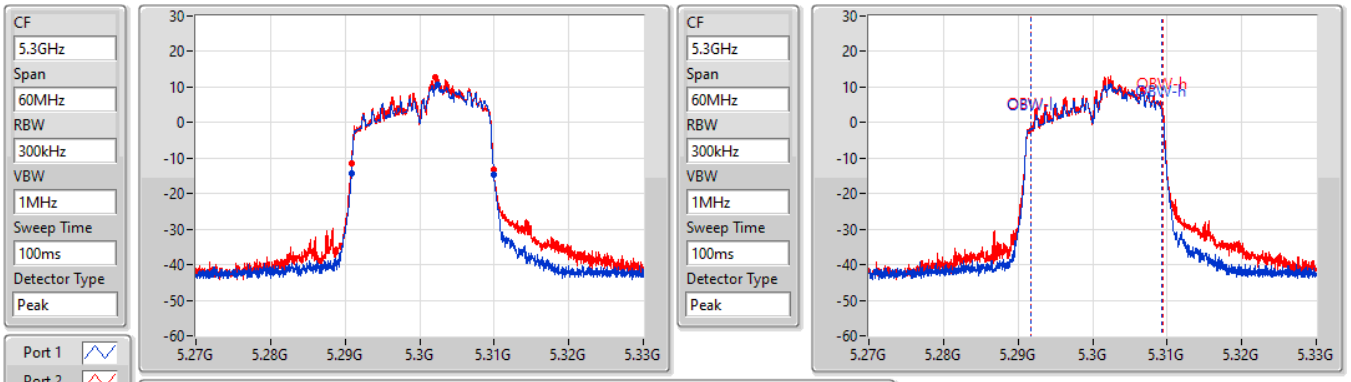


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.29085G	5.30996G	17.691M	5.291664G	5.309355G	Inf	1
19.05M	5.29085G	5.3099G	17.691M	5.291724G	5.309415G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5320MHz


21/05/2022

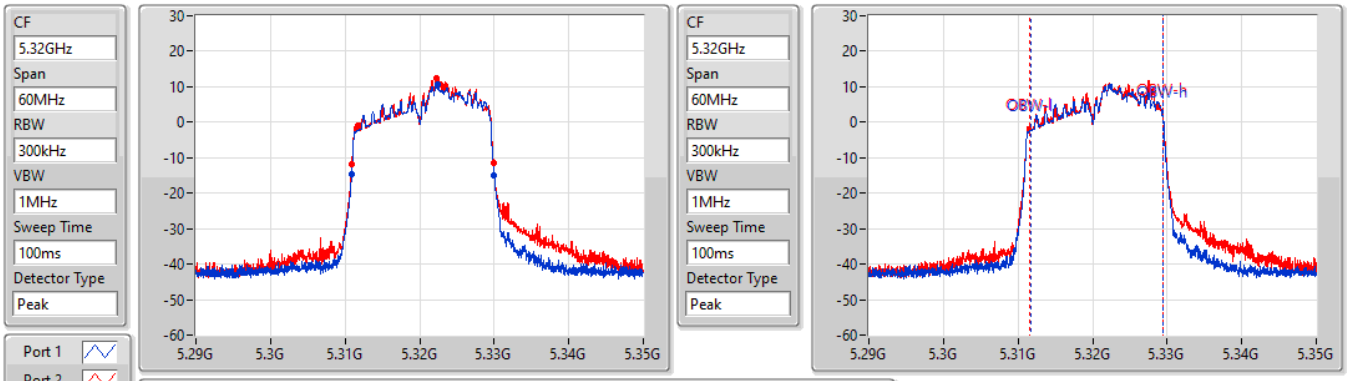

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.31088G	5.32999G	17.691M	5.311694G	5.329385G	Inf	1
19.02M	5.31091G	5.32993G	17.751M	5.311634G	5.329385G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5500MHz

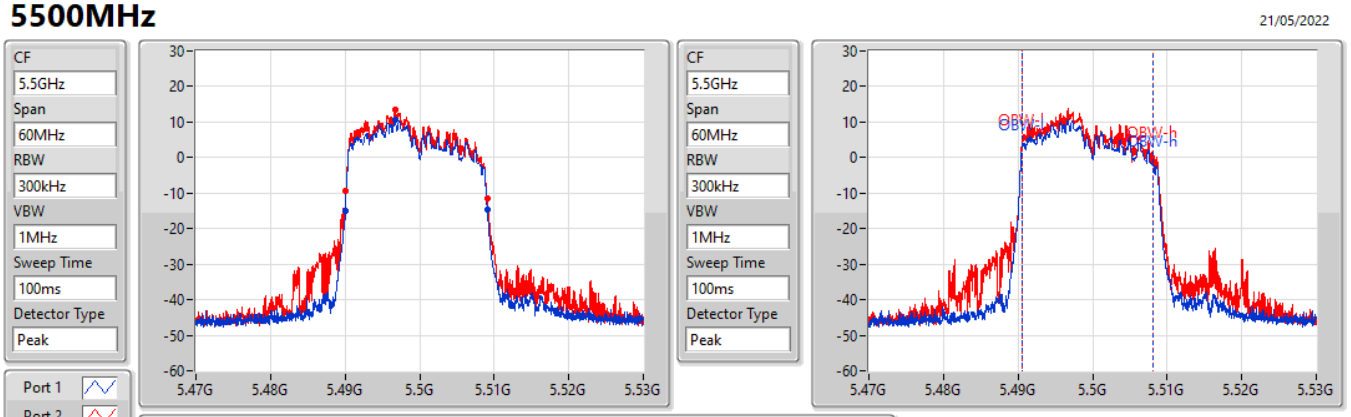

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.05M	5.49004G	5.50909G	17.631M	5.490555G	5.508186G	Inf	1
18.93M	5.4901G	5.50903G	17.601M	5.490585G	5.508186G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5580MHz

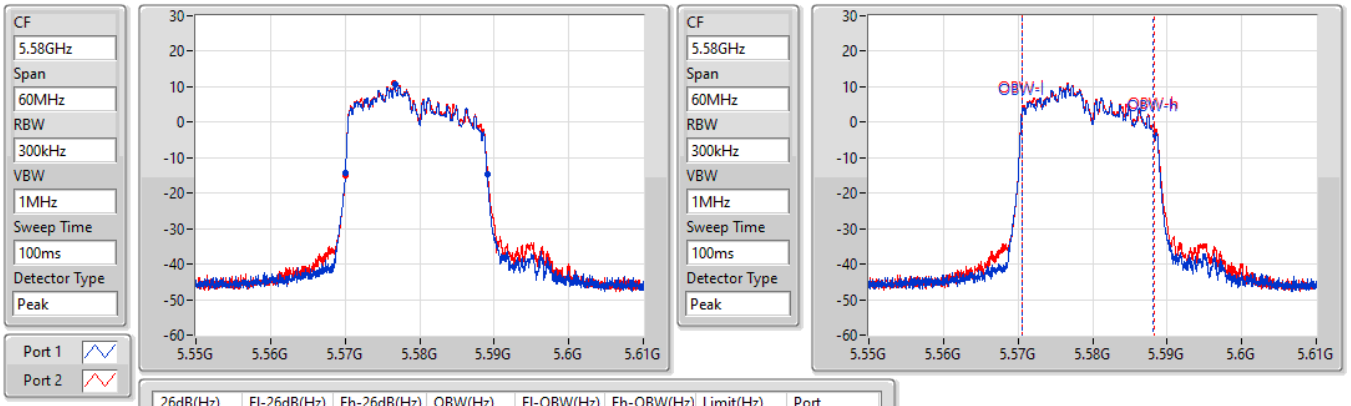


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.02M	5.57004G	5.58906G	17.631M	5.570525G	5.588156G	Inf	1
19.08M	5.57004G	5.58912G	17.721M	5.570525G	5.588246G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5700MHz

21/05/2022

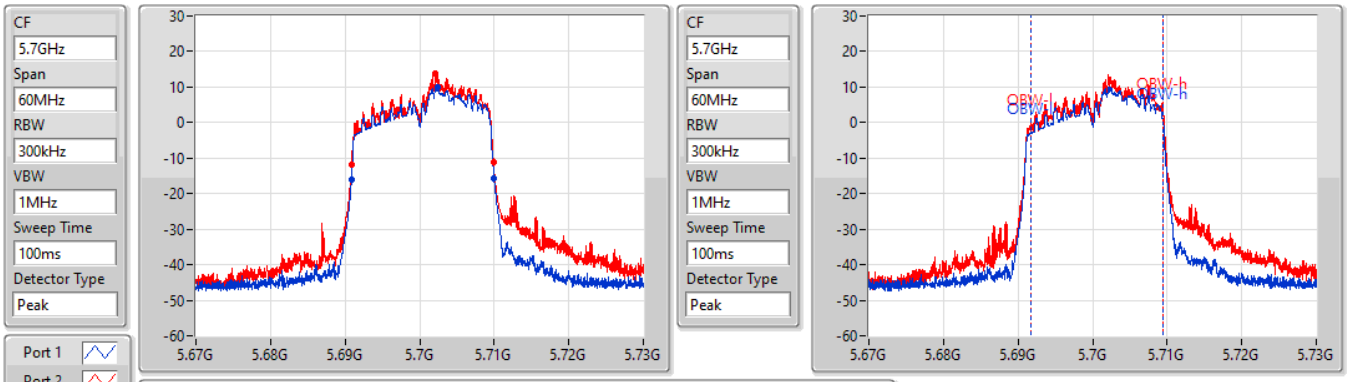


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.14M	5.69085G	5.70999G	17.691M	5.691694G	5.709385G	Inf	1
18.96M	5.69094G	5.7099G	17.751M	5.691694G	5.709445G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.47-5.725GHz

04/06/2022

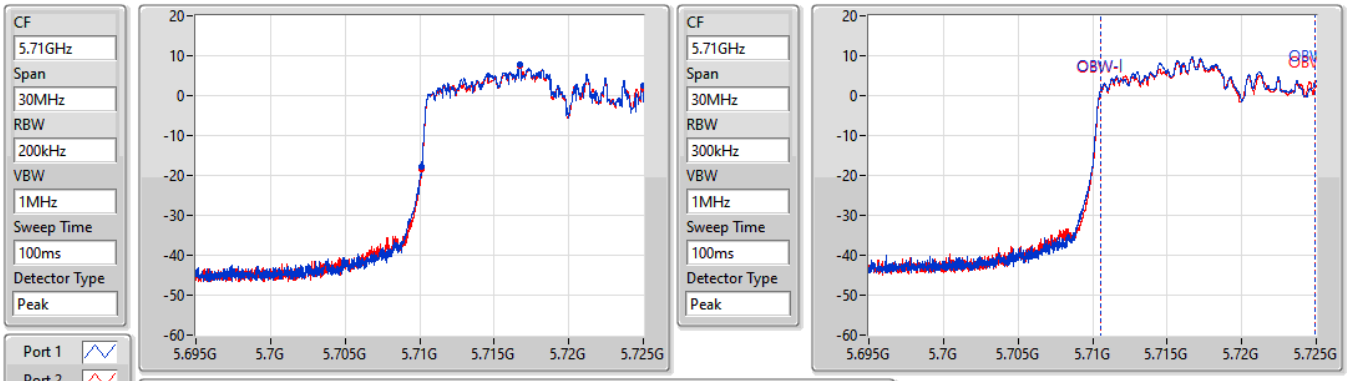


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.865M	5.710135G	5.725G	14.393M	5.71051G	5.724903G	Inf	1
14.85M	5.71015G	5.725G	14.363M	5.710525G	5.724888G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

04/06/2022

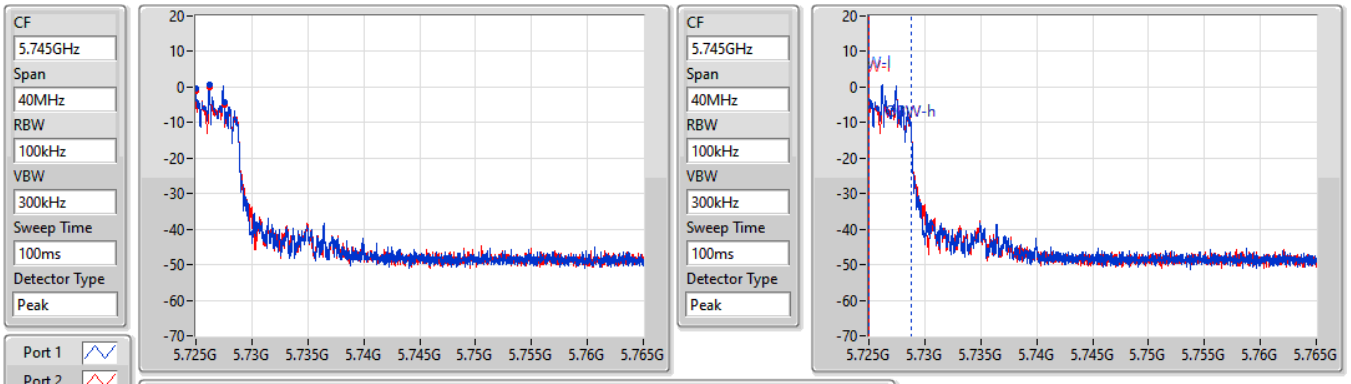


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.52M	5.725G	5.72752G	3.778M	5.72501G	5.728788G	500k	1
2.52M	5.725G	5.72752G	3.818M	5.72501G	5.728828G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

04/06/2022

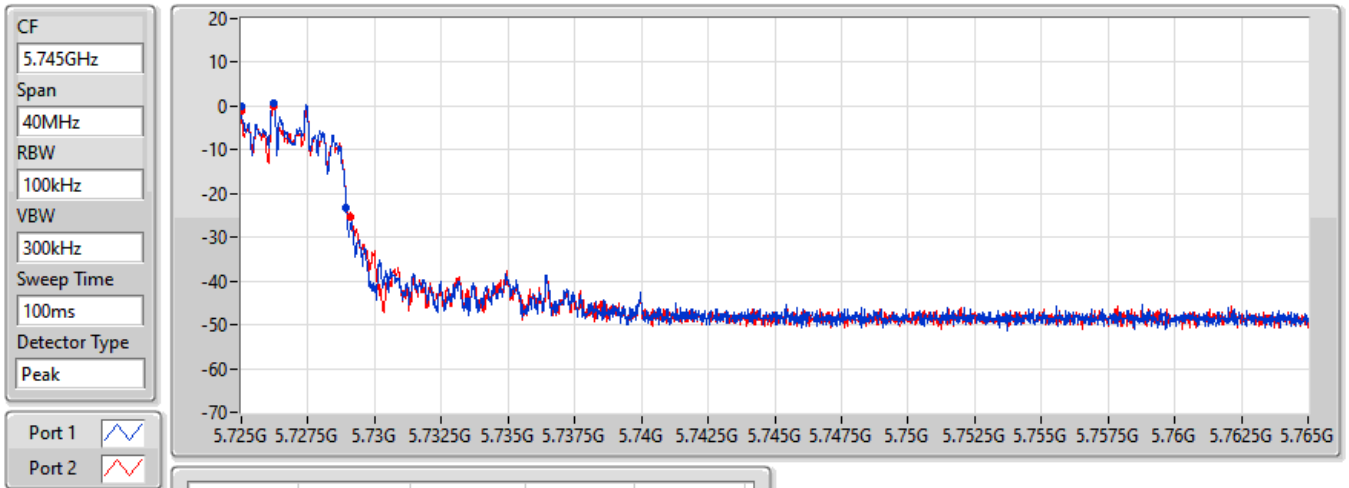


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
3.94M	5.725G	5.72894G	Inf	1
4.1M	5.725G	5.7291G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

04/06/2022

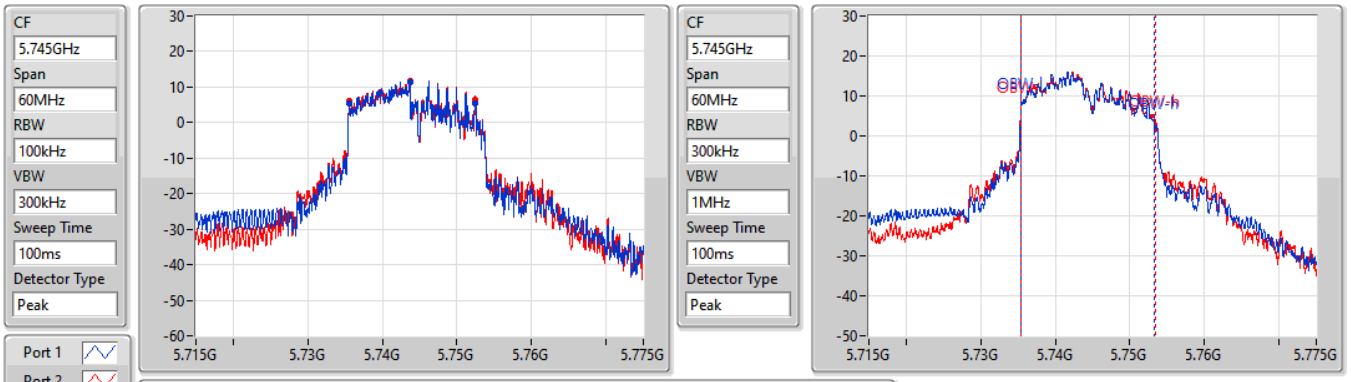


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.95M	5.73555G	5.7525G	17.901M	5.735405G	5.753306G	500k	1
16.95M	5.73555G	5.7525G	18.081M	5.7353375G	5.7534456G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

04/06/2022

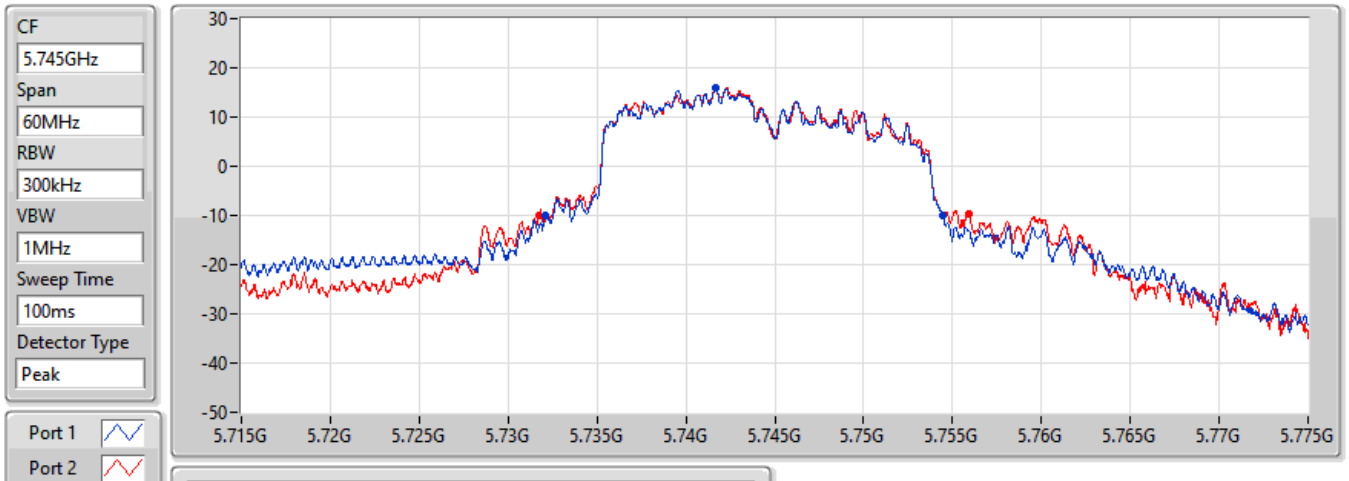


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
22.38M	5.7321G	5.75448G	Inf	1
24.18M	5.73174G	5.75592G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz

04/06/2022

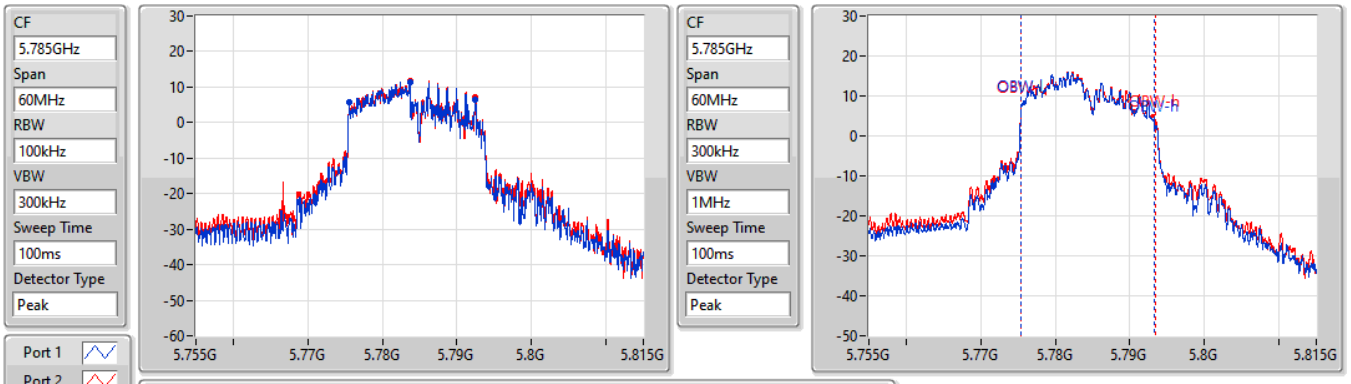


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.92M	5.77558G	5.7925G	17.931M	5.775405G	5.793336G	500k	1
16.95M	5.77555G	5.7925G	18.081M	5.775375G	5.793456G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz

04/06/2022

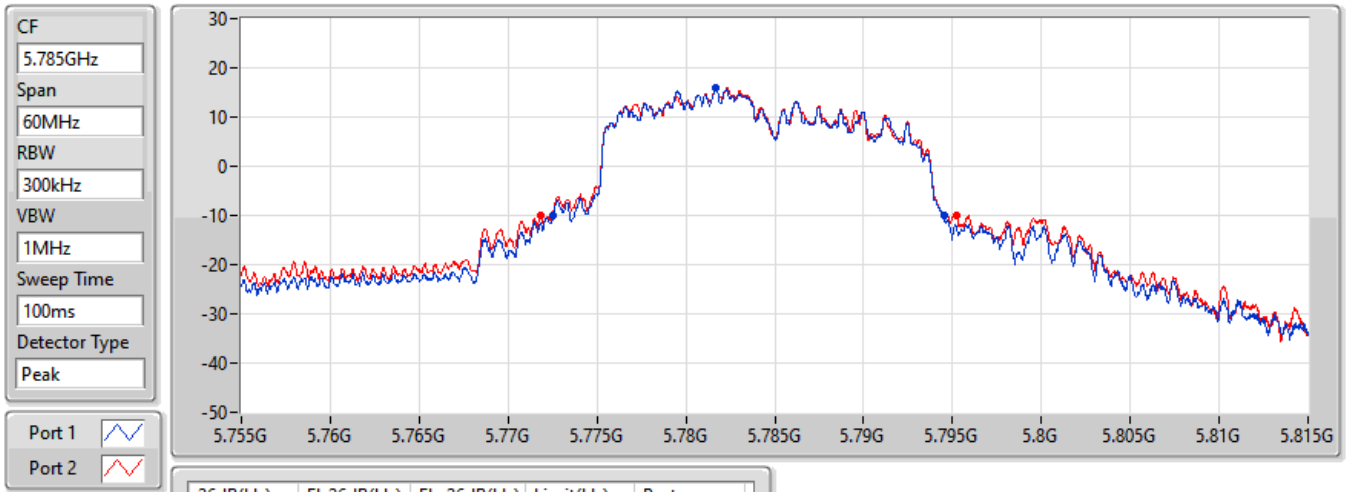


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
21.96M	5.77255G	5.79451G	Inf	1
23.43M	5.7718G	5.79523G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz

04/06/2022

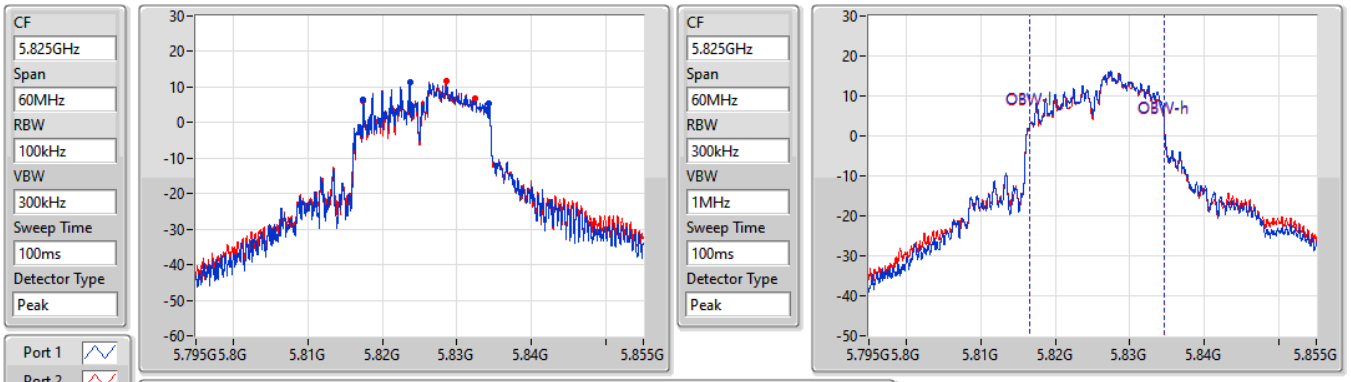


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.89M	5.81744G	5.83433G	18.021M	5.816634G	5.834655G	500k	1
15.06M	5.81744G	5.8325G	18.081M	5.816604G	5.834685G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz

04/06/2022

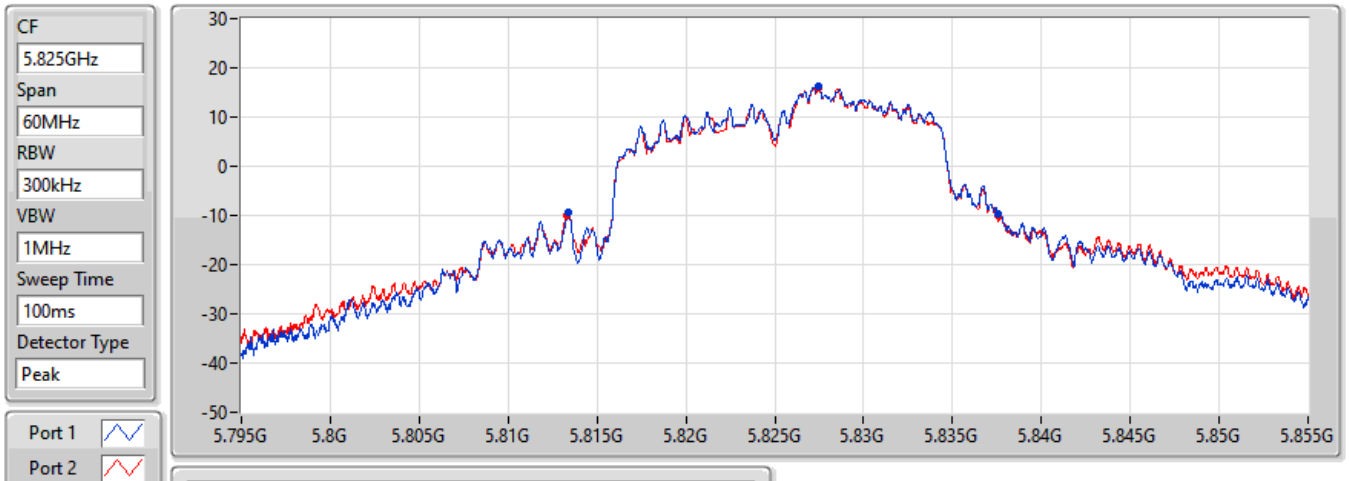

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
24.15M	5.81339G	5.83754G	Inf	1
24.24M	5.8133G	5.83754G	Inf	2

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.32M	17.421M	17M4D1D	18.9M	17.151M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.32M	17.841M	17M8D1D	19.23M	17.541M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.29M	17.871M	17M9D1D	15.195M	14.588M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	15.75M	17.991M	18M0D1D	2.72M	3.778M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	18.9M	17.391M	18.96M	17.301M
5200MHz	Pass	Inf	19.23M	17.301M	19.26M	17.151M
5240MHz	Pass	Inf	19.02M	17.391M	19.32M	17.421M
5260MHz	Pass	Inf	19.23M	17.751M	19.32M	17.661M
5300MHz	Pass	Inf	19.26M	17.541M	19.26M	17.571M
5320MHz	Pass	Inf	19.23M	17.631M	19.29M	17.841M
5500MHz	Pass	Inf	19.2M	17.601M	19.29M	17.751M
5580MHz	Pass	Inf	19.26M	17.511M	19.17M	17.871M
5700MHz	Pass	Inf	19.23M	17.721M	19.17M	17.661M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.225M	14.618M	15.195M	14.588M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.72M	3.778M	2.76M	3.858M
5745MHz	Pass	500k	14.46M	17.991M	14.46M	17.931M
5785MHz	Pass	500k	14.46M	17.661M	12M	17.781M
5825MHz	Pass	500k	15.69M	17.811M	15.75M	17.811M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5180MHz

21/05/2022

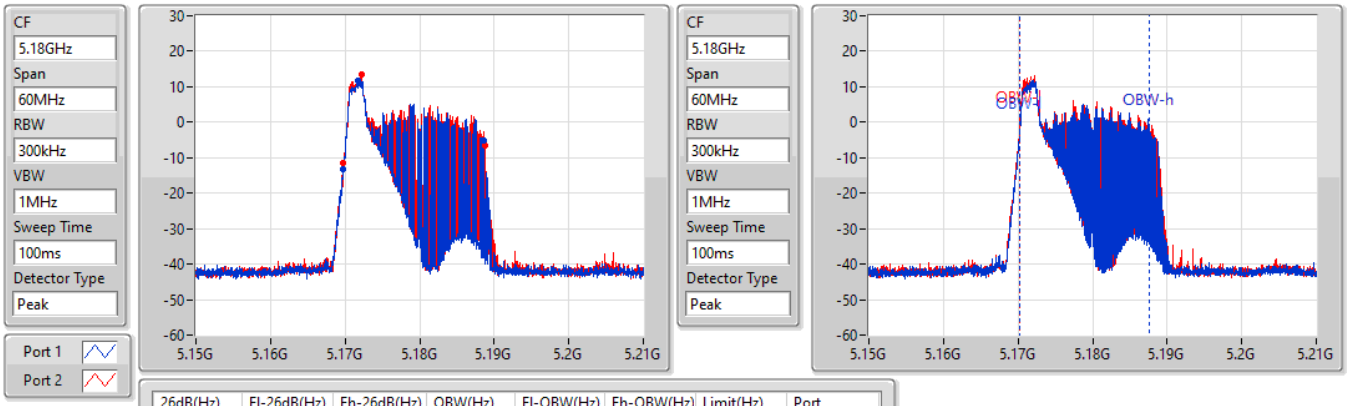


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.9M	5.16977G	5.18867G	17.391M	5.170285G	5.187676G	Inf	1
18.96M	5.1698G	5.18876G	17.301M	5.170285G	5.187586G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5200MHz


21/05/2022

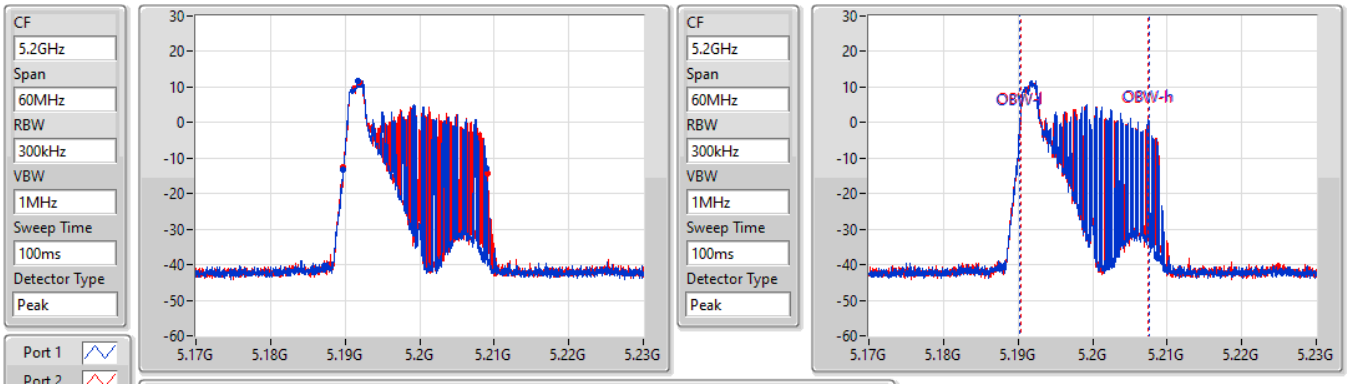

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.23M	5.18971G	5.20894G	17.301M	5.190255G	5.207556G	Inf	1
19.26M	5.18977G	5.20903G	17.151M	5.190315G	5.207466G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5240MHz

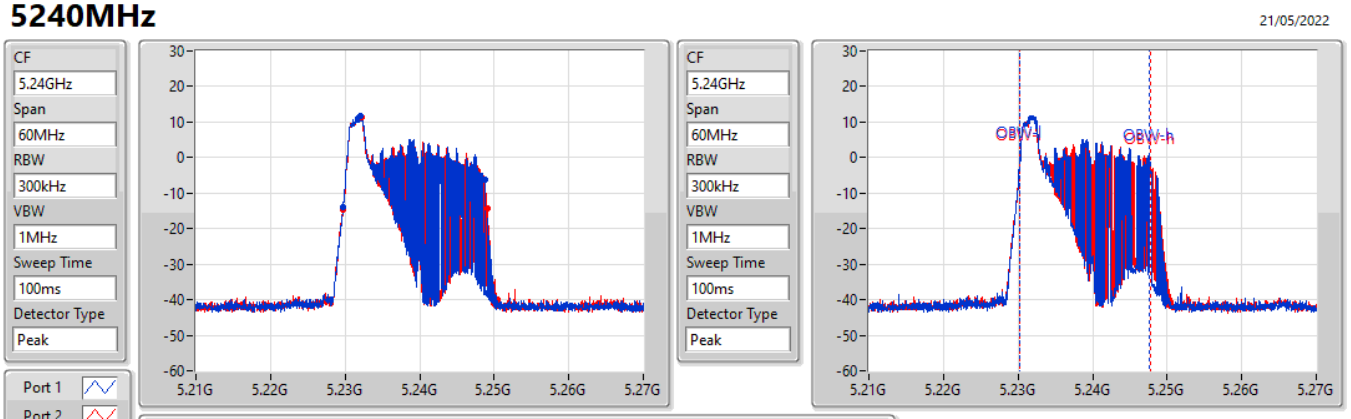

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.02M	5.22971G	5.24873G	17.391M	5.230285G	5.247676G	Inf	1
19.32M	5.22971G	5.24903G	17.421M	5.230285G	5.247706G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5260MHz

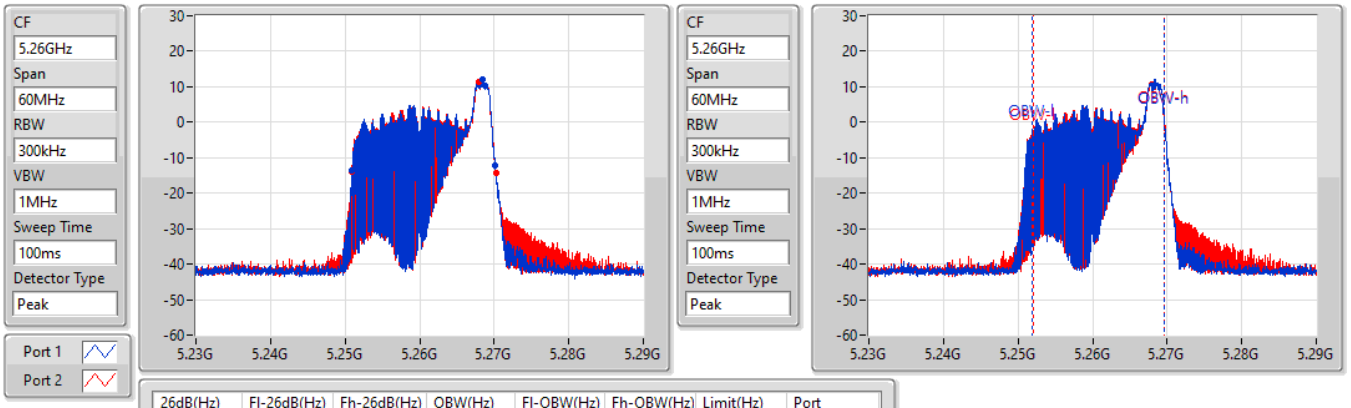


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.23M	5.25094G	5.27017G	17.751M	5.251904G	5.269655G	Inf	1
19.32M	5.25091G	5.27023G	17.661M	5.251994G	5.269655G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5300MHz

21/05/2022

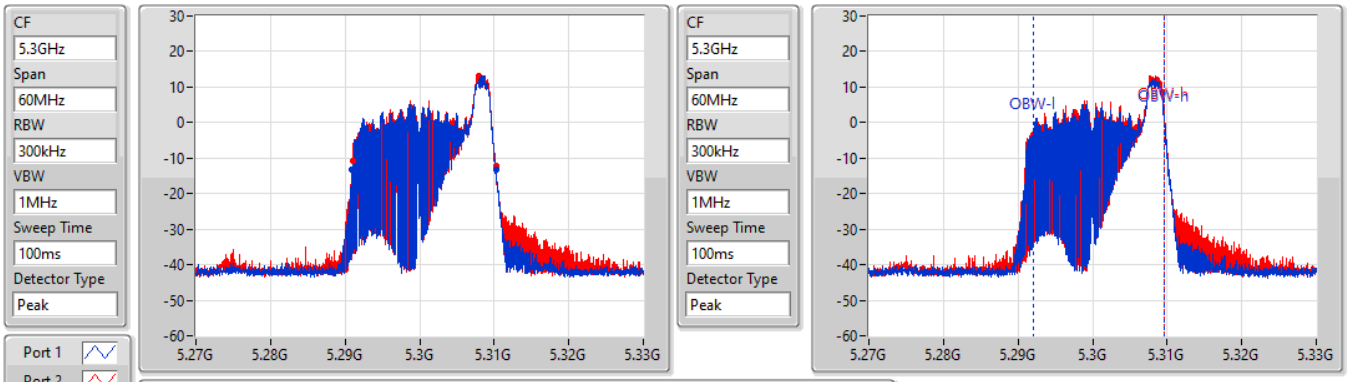


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.26M	5.29094G	5.3102G	17.541M	5.292114G	5.309655G	Inf	1
19.26M	5.291G	5.31026G	17.571M	5.292054G	5.309625G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5320MHz

21/05/2022

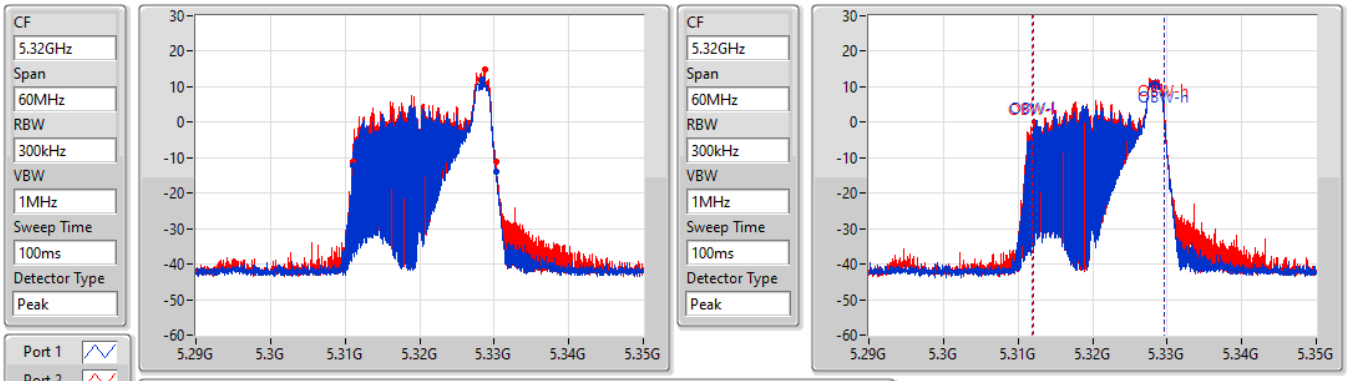


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.23M	5.311G	5.33023G	17.631M	5.312024G	5.329655G	Inf	1
19.29M	5.311G	5.33029G	17.841M	5.311814G	5.329655G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5500MHz

21/05/2022

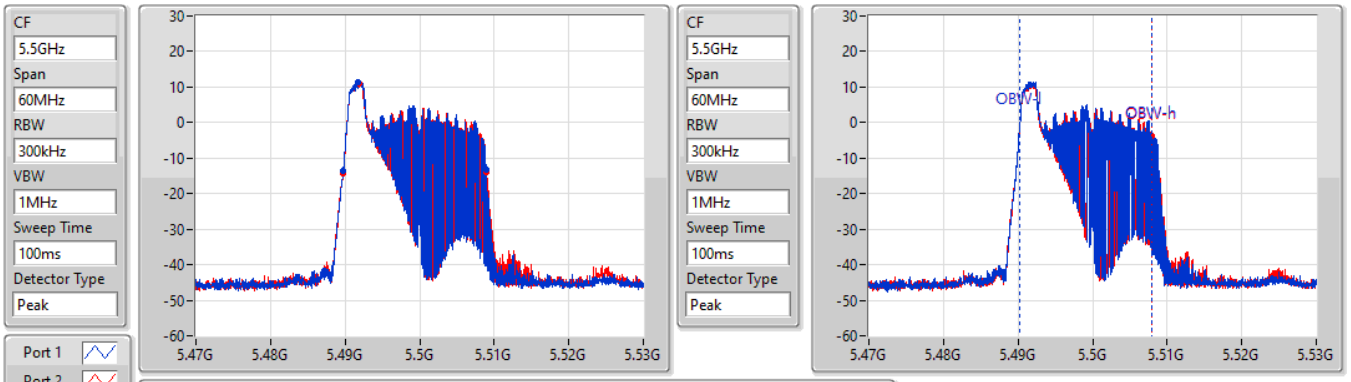


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.2M	5.48971G	5.50891G	17.601M	5.490285G	5.507886G	Inf	1
19.29M	5.48968G	5.50897G	17.751M	5.490255G	5.508006G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5580MHz

21/05/2022

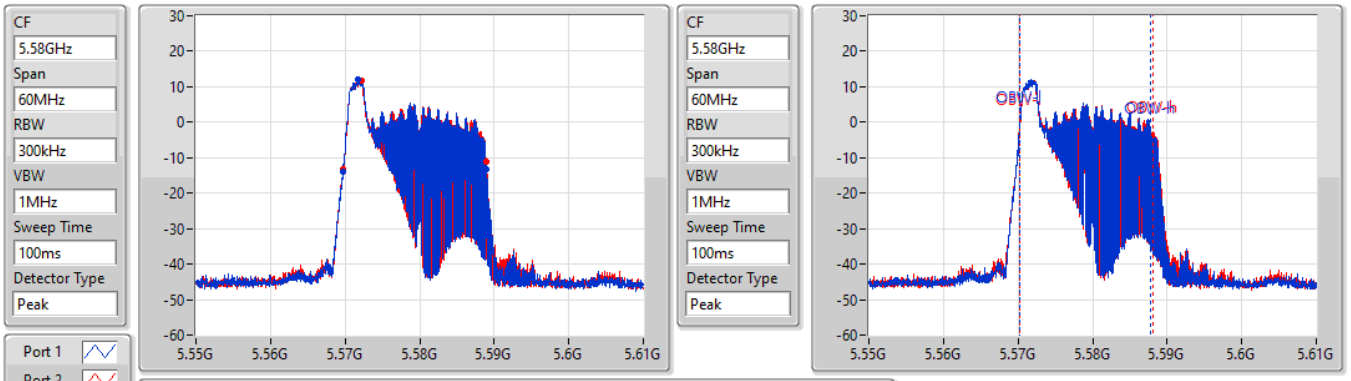


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.26M	5.56968G	5.58894G	17.511M	5.570285G	5.587796G	Inf	1
19.17M	5.56974G	5.58891G	17.871M	5.570285G	5.588156G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5700MHz

21/05/2022

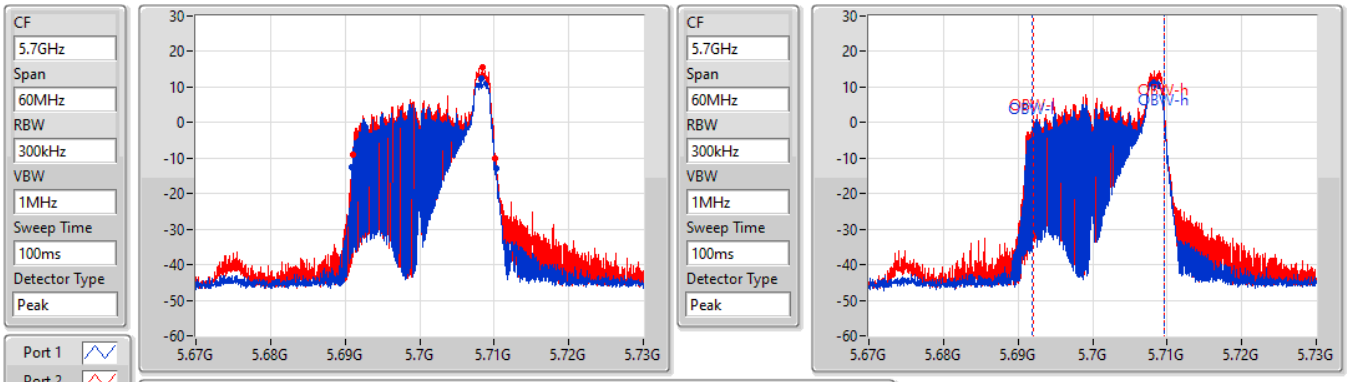


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.23M	5.69097G	5.7102G	17.721M	5.691934G	5.709655G	Inf	1
19.17M	5.691G	5.71017G	17.661M	5.691994G	5.709655G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.47-5.725GHz

04/06/2022

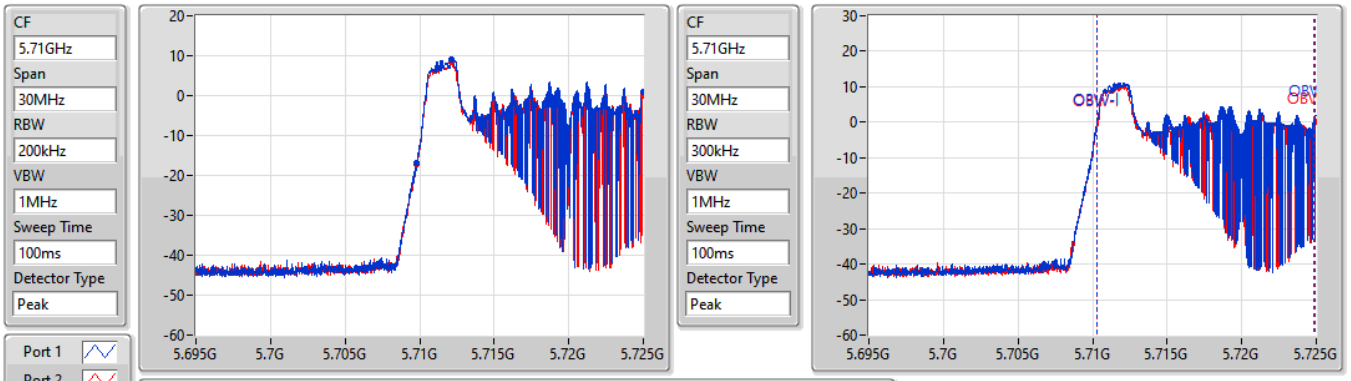


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.225M	5.709775G	5.725G	14.618M	5.710285G	5.724903G	Inf	1
15.195M	5.709805G	5.725G	14.588M	5.710285G	5.724873G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

04/06/2022

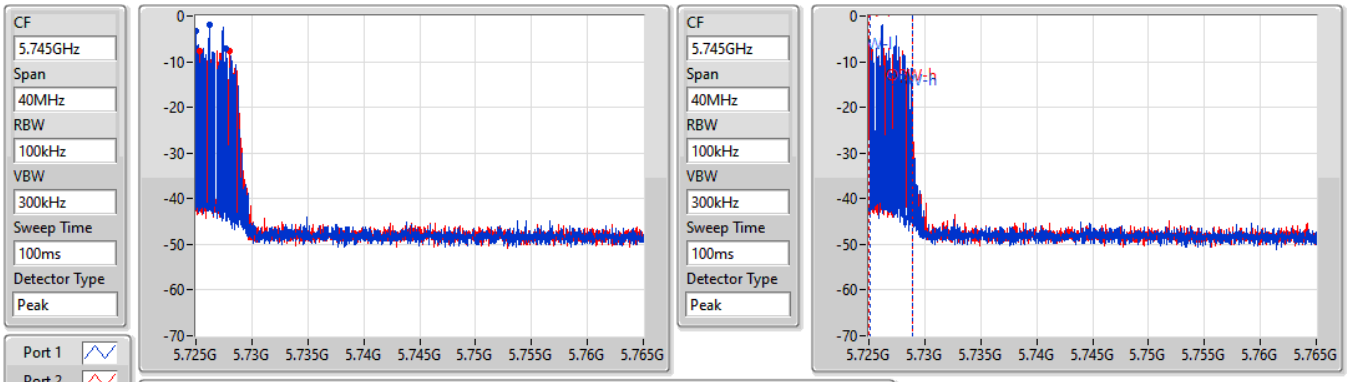


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.72M	5.725G	5.72772G	3.778M	5.72509G	5.728868G	500k	1
2.76M	5.72528G	5.72804G	3.858M	5.72501G	5.728868G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

04/06/2022

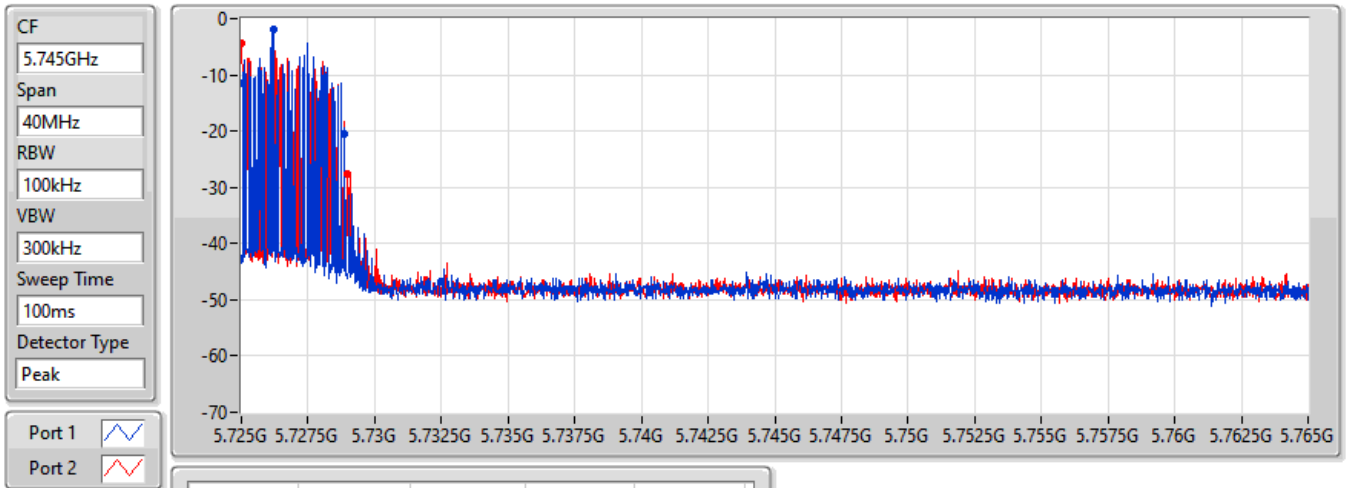


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
3.8M	5.72508G	5.72888G	Inf	1
3.98M	5.725G	5.72898G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

04/06/2022

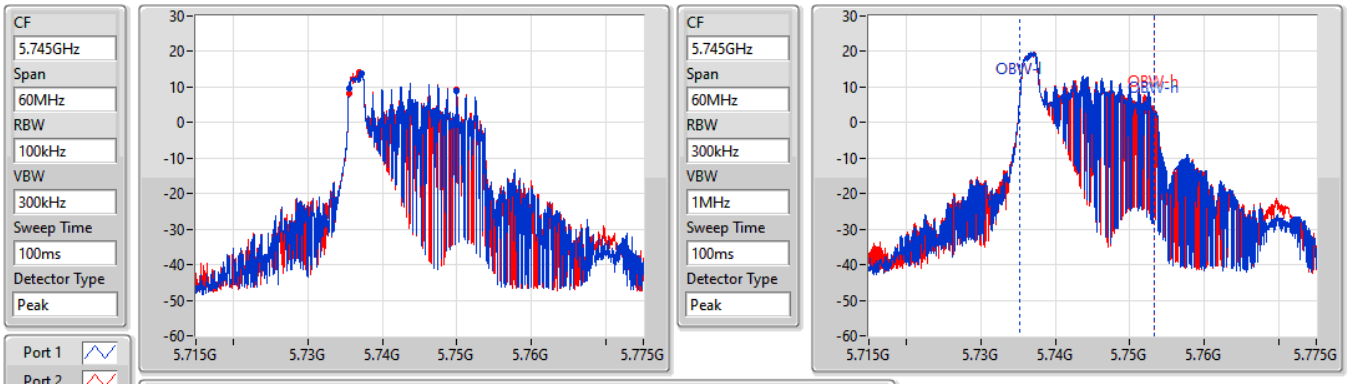


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.46M	5.73555G	5.75001G	17.991M	5.735285G	5.753276G	500k	1
14.46M	5.73552G	5.74998G	17.931M	5.735285G	5.753216G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz


04/06/2022

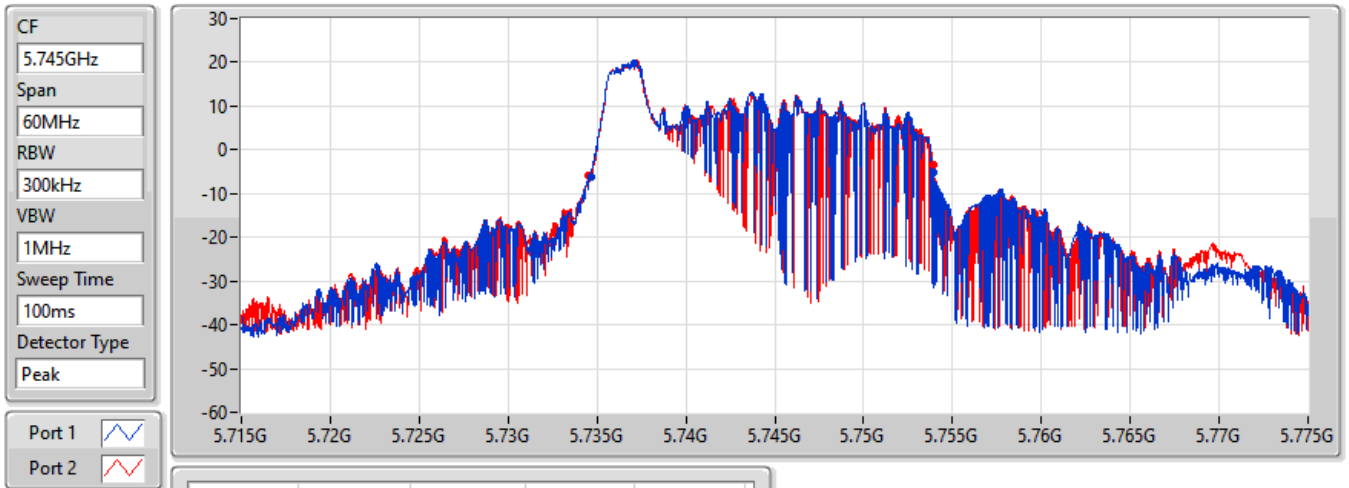

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.29M	5.73465G	5.75394G	Inf	1
19.38M	5.73453G	5.75391G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5785MHz

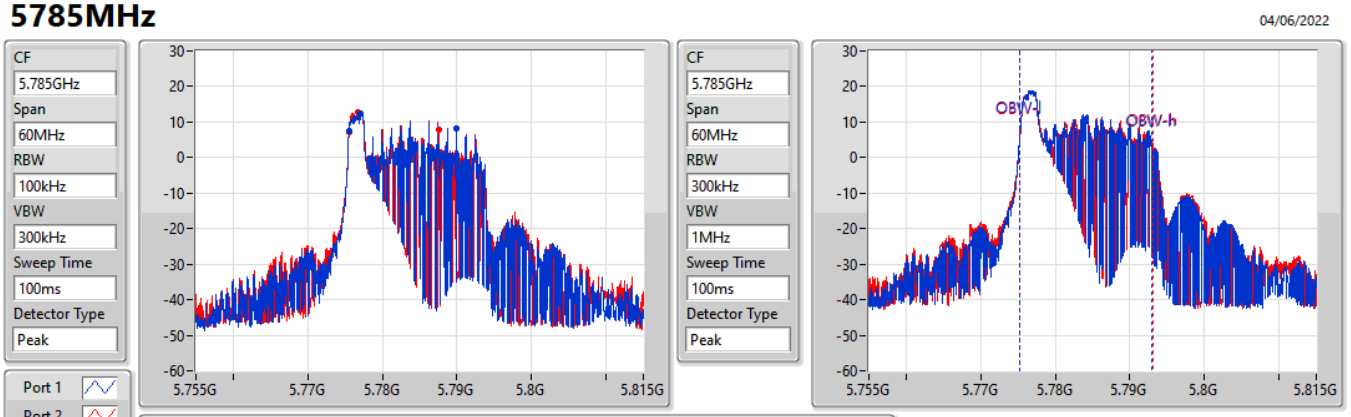

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.46M	5.77552G	5.78998G	17.661M	5.775285G	5.792946G	500k	1
12M	5.77552G	5.78752G	17.781M	5.775285G	5.793066G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5785MHz

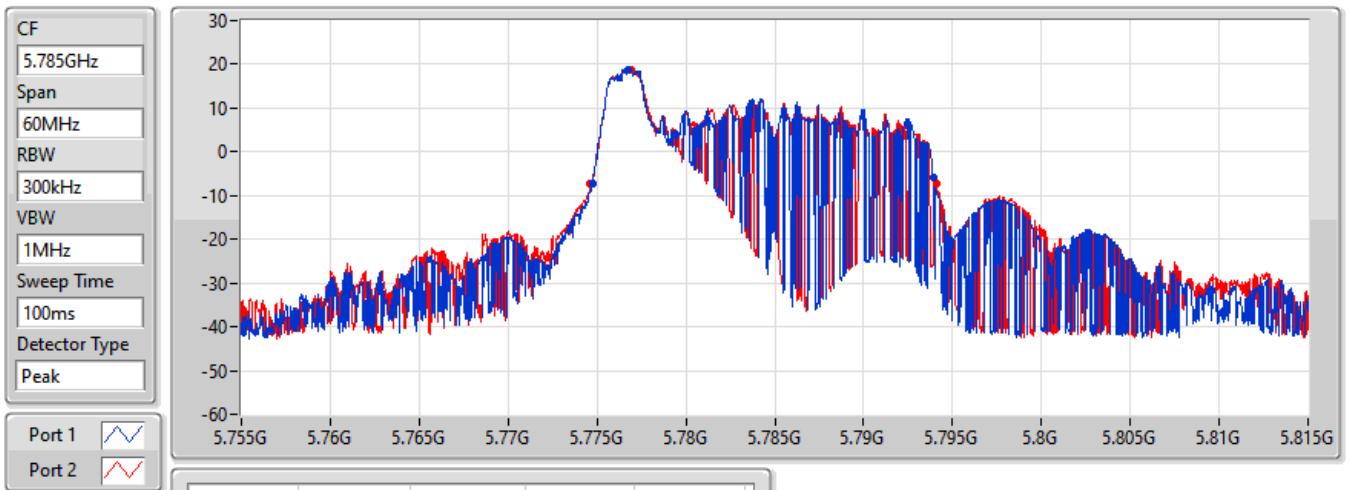

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.2M	5.77474G	5.79394G	Inf	1
19.5M	5.77459G	5.79409G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5825MHz

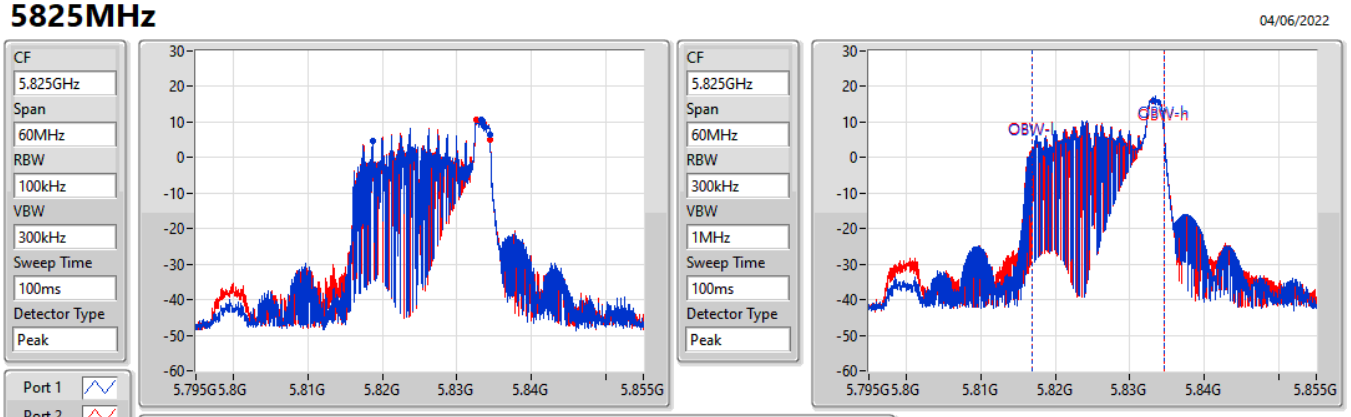

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.69M	5.8187G	5.83439G	17.811M	5.816844G	5.834655G	500k	1
15.75M	5.8187G	5.83445G	17.811M	5.816844G	5.834655G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz

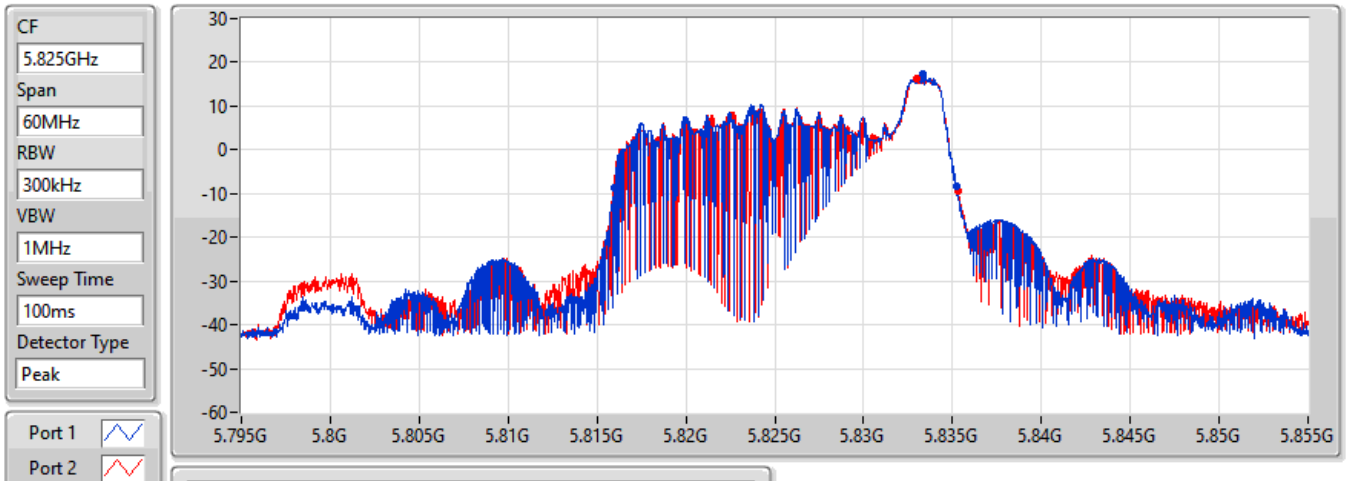

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.26M	5.81594G	5.8352G	Inf	1
19.35M	5.81594G	5.83529G	Inf	2

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.11M	17.811M	17M8D1D	19.05M	17.691M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.2M	17.901M	17M9D1D	19.11M	17.811M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.17M	17.841M	17M8D1D	14.925M	14.423M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	17.01M	18.081M	18M1D1D	2.52M	3.798M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	19.11M	17.691M	19.05M	17.751M
5200MHz	Pass	Inf	19.08M	17.691M	19.05M	17.781M
5240MHz	Pass	Inf	19.08M	17.691M	19.11M	17.811M
5260MHz	Pass	Inf	19.14M	17.841M	19.17M	17.841M
5300MHz	Pass	Inf	19.17M	17.841M	19.17M	17.901M
5320MHz	Pass	Inf	19.2M	17.841M	19.11M	17.811M
5500MHz	Pass	Inf	19.11M	17.691M	18.96M	17.781M
5580MHz	Pass	Inf	19.08M	17.691M	18.96M	17.781M
5700MHz	Pass	Inf	19.17M	17.811M	19.17M	17.841M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.015M	14.438M	14.925M	14.423M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.52M	3.798M	2.52M	3.818M
5745MHz	Pass	500k	16.98M	17.871M	16.98M	18.021M
5785MHz	Pass	500k	17.01M	17.931M	16.98M	18.081M
5825MHz	Pass	500k	16.95M	18.051M	15.72M	17.931M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5180MHz

21/05/2022

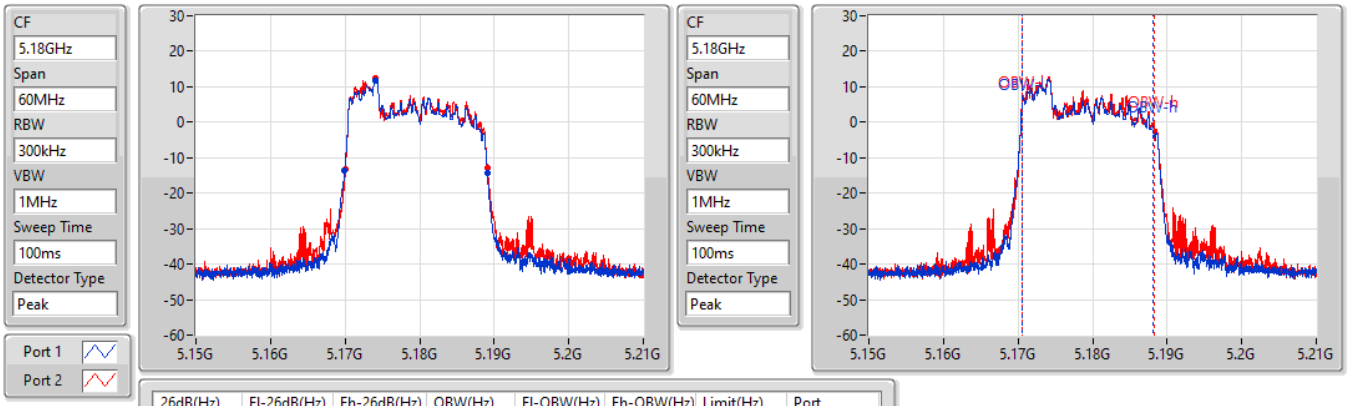


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.16995G	5.18906G	17.691M	5.170495G	5.188186G	Inf	1
19.05M	5.17004G	5.18909G	17.751M	5.170495G	5.188246G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5200MHz

21/05/2022

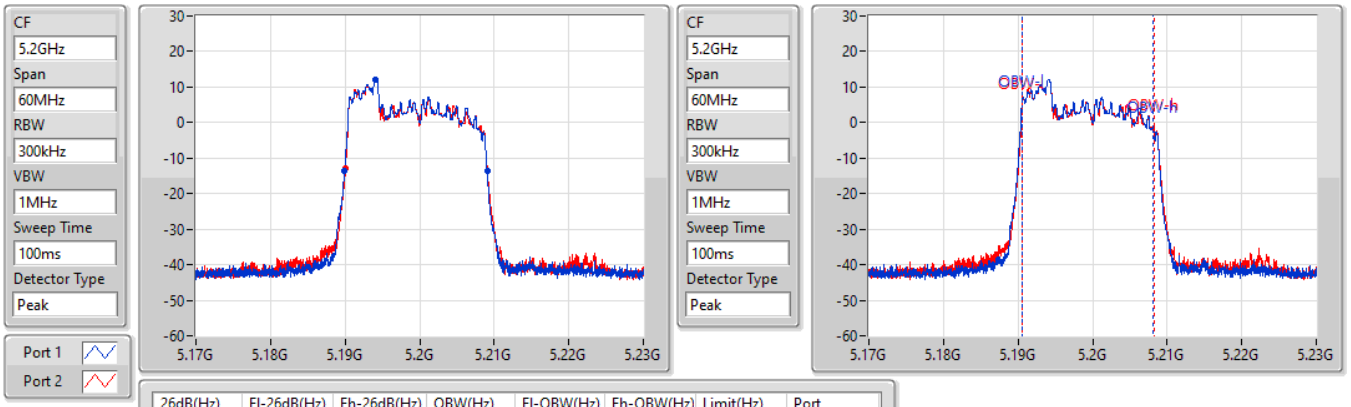


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.18995G	5.20903G	17.691M	5.190495G	5.208186G	Inf	1
19.05M	5.19004G	5.20909G	17.781M	5.190495G	5.208276G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5240MHz

21/05/2022

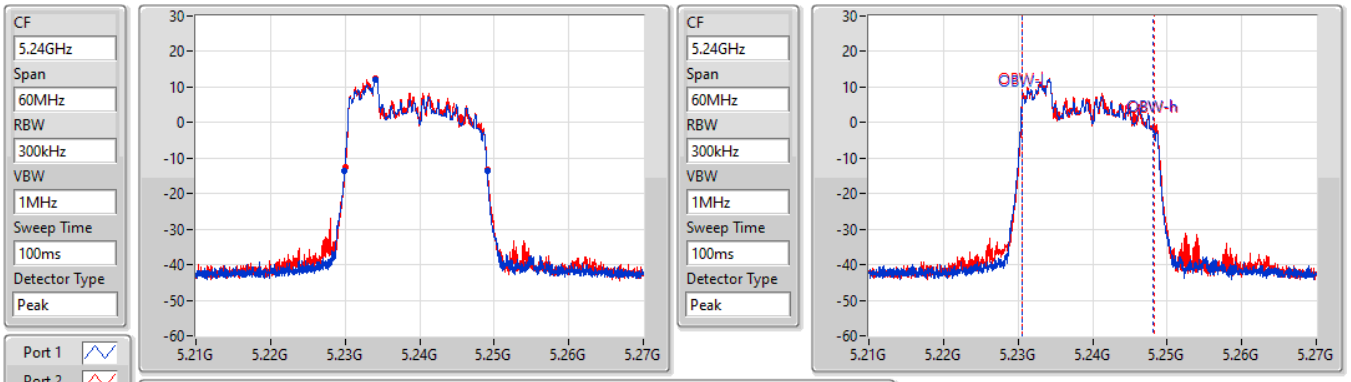


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.22995G	5.24903G	17.691M	5.230495G	5.248186G	Inf	1
19.11M	5.22998G	5.24909G	17.811M	5.230495G	5.248306G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5260MHz

21/05/2022

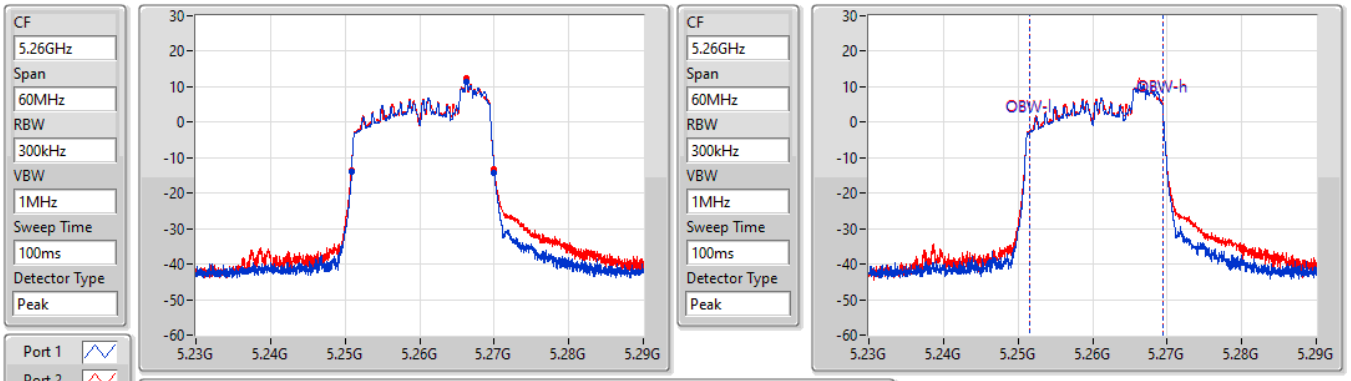


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.14M	5.25088G	5.27002G	17.841M	5.251604G	5.269445G	Inf	1
19.17M	5.25085G	5.27002G	17.841M	5.251604G	5.269445G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5300MHz

21/05/2022

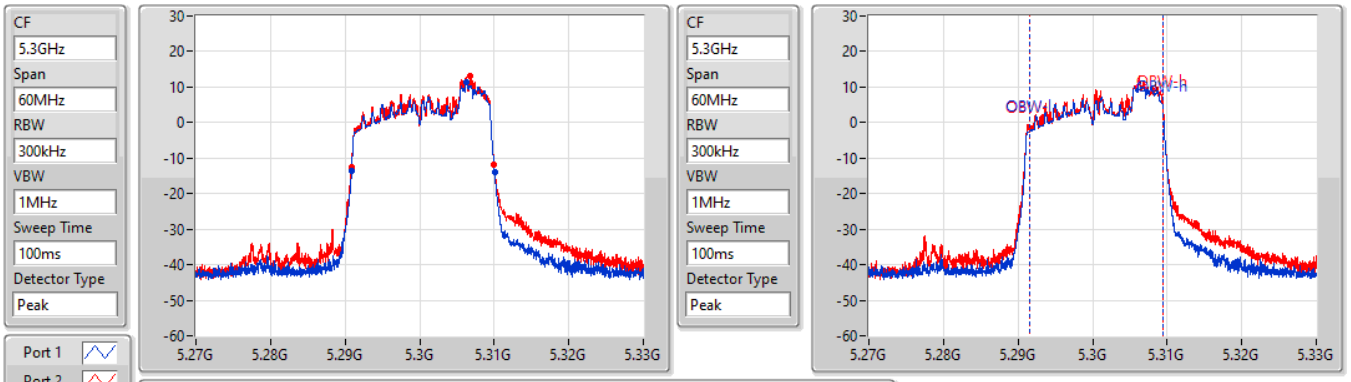


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.29088G	5.31005G	17.841M	5.291604G	5.309445G	Inf	1
19.17M	5.29082G	5.30999G	17.901M	5.291544G	5.309445G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5320MHz


21/05/2022

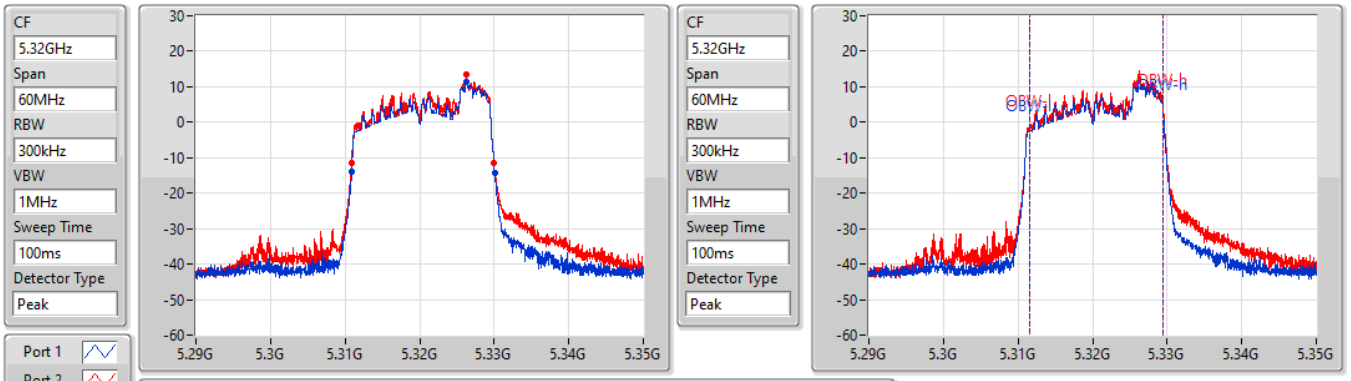

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.2M	5.31088G	5.33008G	17.841M	5.311604G	5.329445G	Inf	1
19.11M	5.31088G	5.32999G	17.811M	5.311634G	5.329445G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5500MHz

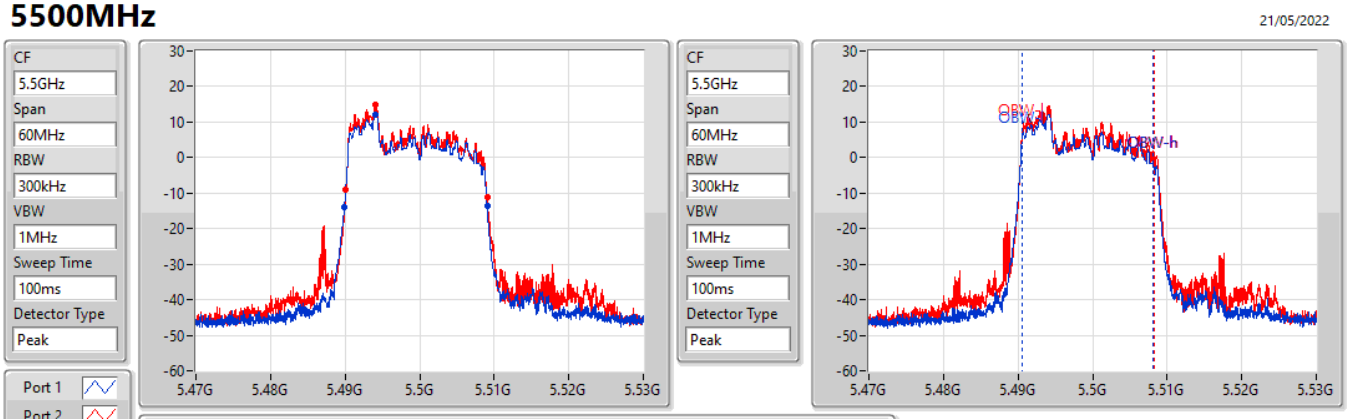

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.48992G	5.50903G	17.691M	5.490495G	5.508186G	Inf	1
18.96M	5.4901G	5.50906G	17.781M	5.490525G	5.508306G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5580MHz

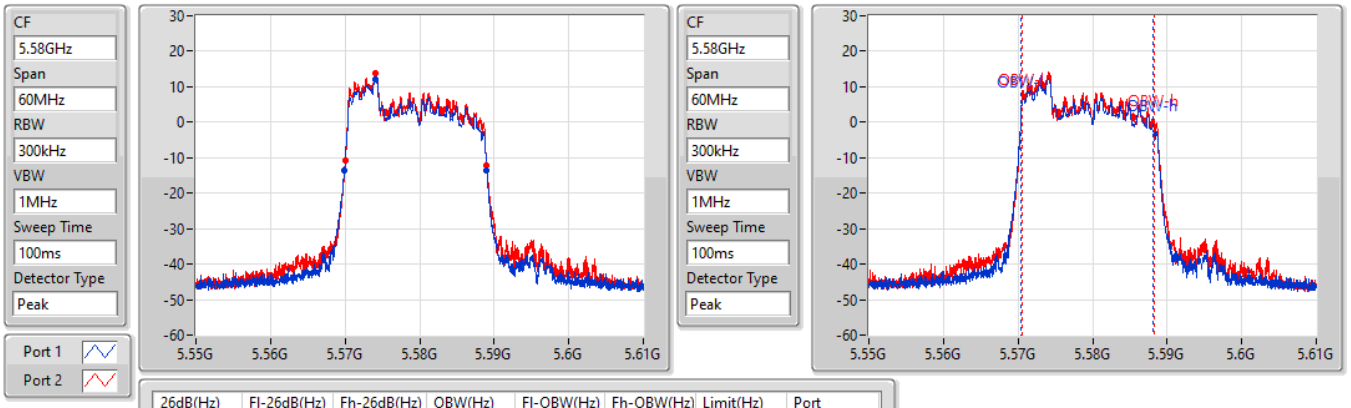


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.56992G	5.589G	17.691M	5.570465G	5.588156G	Inf	1
18.96M	5.57004G	5.589G	17.781M	5.570495G	5.588276G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5700MHz

21/05/2022

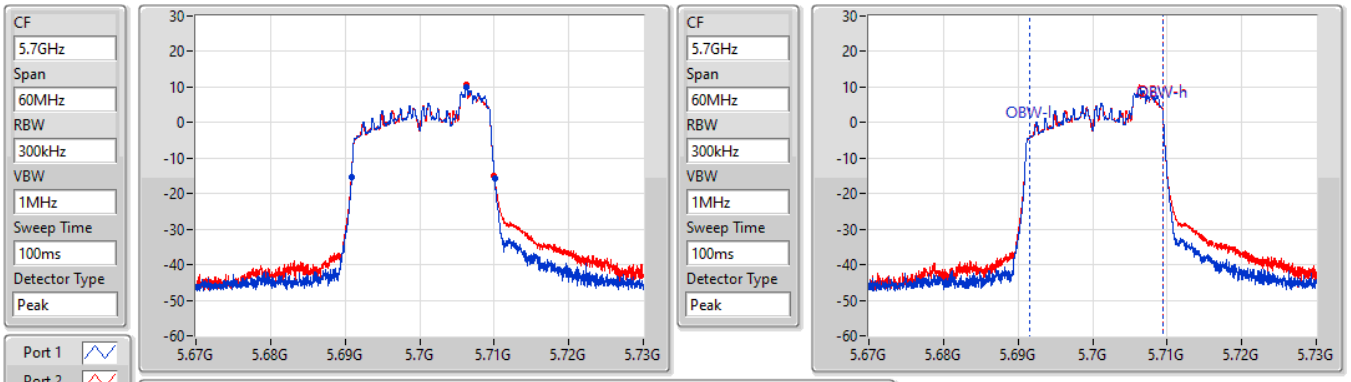


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.69088G	5.71005G	17.811M	5.691634G	5.709445G	Inf	1
19.17M	5.69085G	5.71002G	17.841M	5.691604G	5.709445G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.47-5.725GHz

04/06/2022

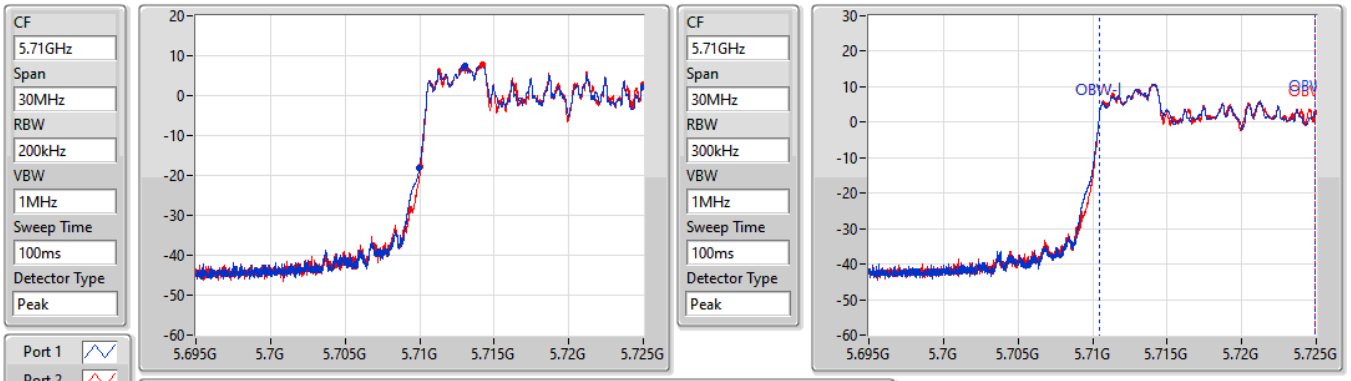


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.015M	5.709985G	5.725G	14.438M	5.710465G	5.724903G	Inf	1
14.925M	5.710075G	5.725G	14.423M	5.710465G	5.724888G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

04/06/2022

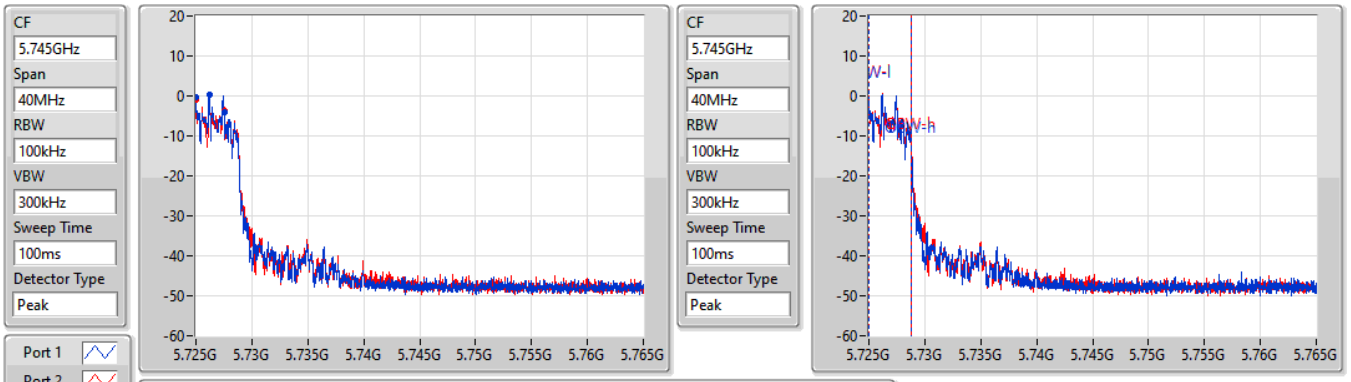


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.52M	5.725G	5.72752G	3.798M	5.72501G	5.728808G	500k	1
2.52M	5.725G	5.72752G	3.818M	5.72501G	5.728828G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

04/06/2022

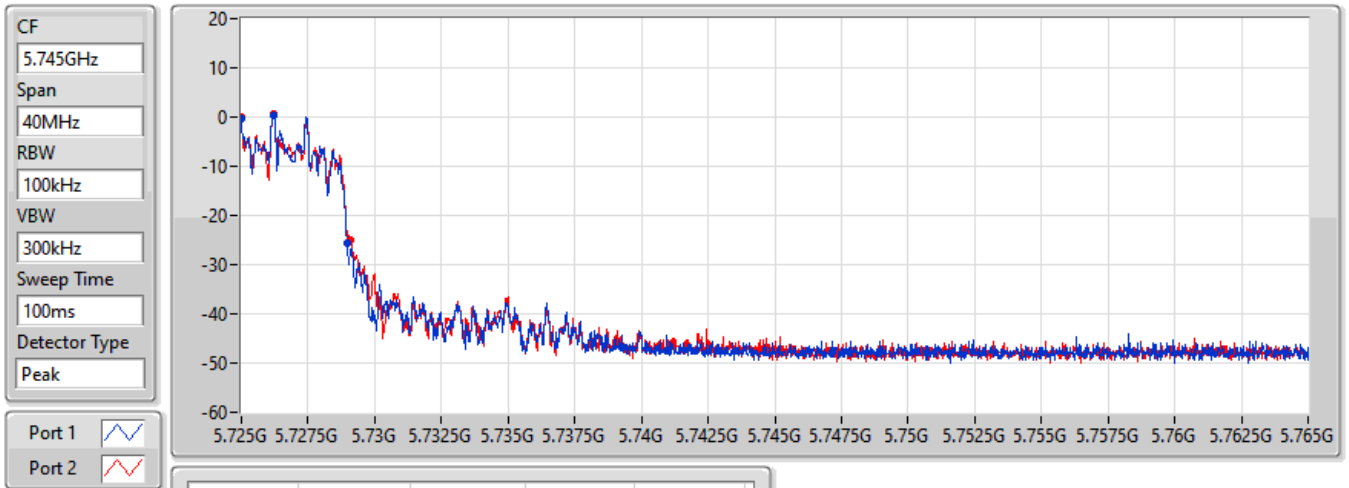


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
3.96M	5.725G	5.72896G	Inf	1
4.1M	5.725G	5.7291G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

04/06/2022

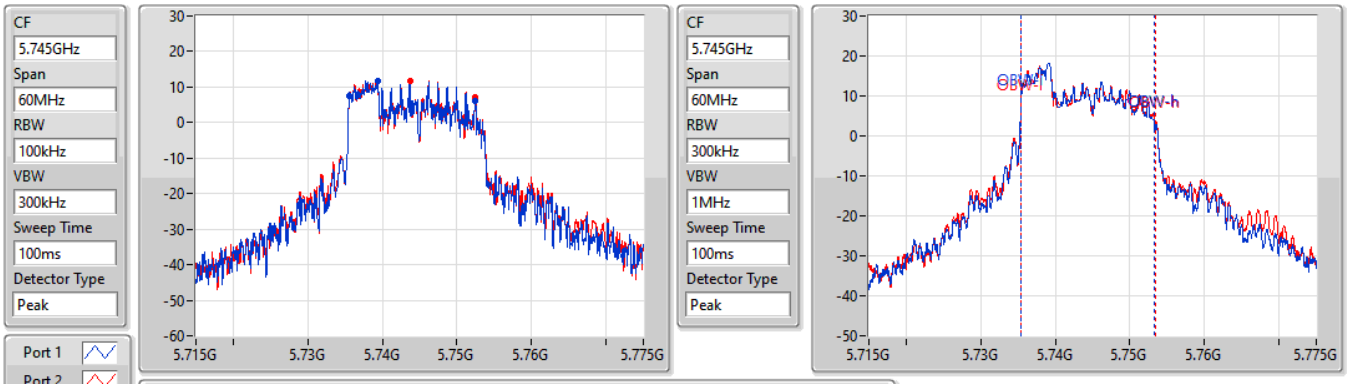


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.98M	5.73552G	5.7525G	17.871M	5.735405G	5.753276G	500k	1
16.98M	5.73552G	5.7525G	18.021M	5.735375G	5.753396G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

04/06/2022

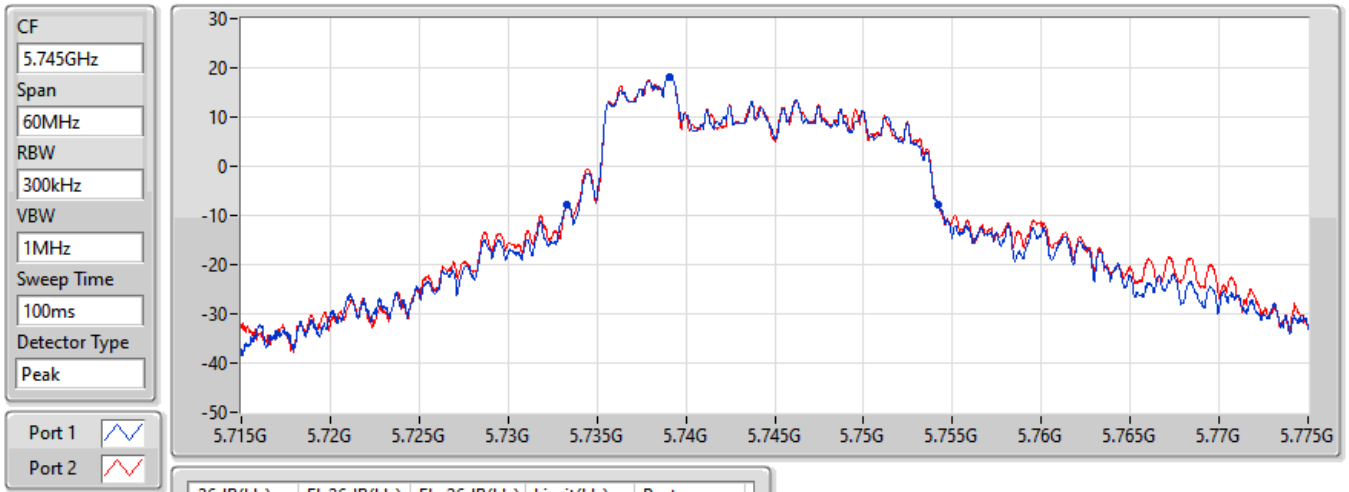


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
20.85M	5.73333G	5.75418G	Inf	1
20.85M	5.73333G	5.75418G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX **EBW**

5785MHz

04/06/2022

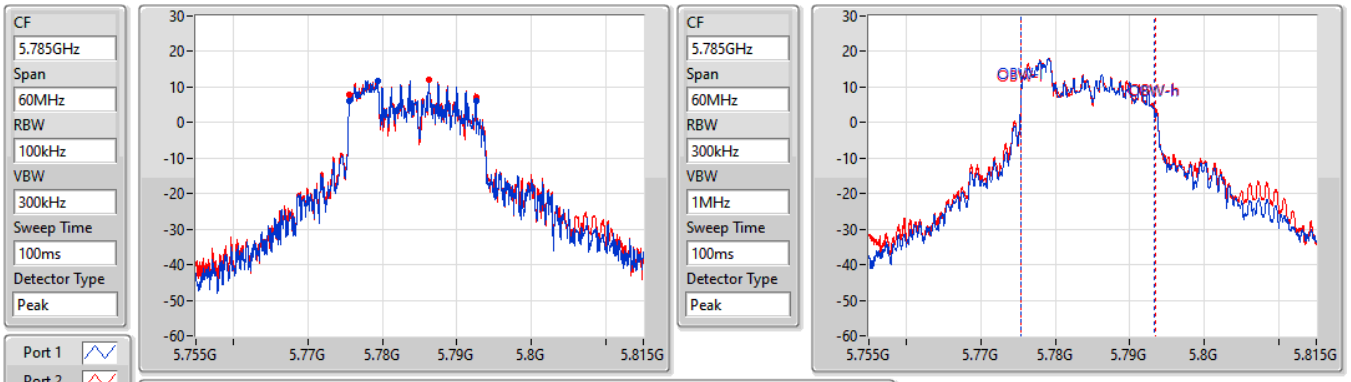


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
17.01M	5.77552G	5.79253G	17.931M	5.775405G	5.793336G	500k	1
16.98M	5.77555G	5.79253G	18.081M	5.775375G	5.793456G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX **EBW**

5785MHz

04/06/2022

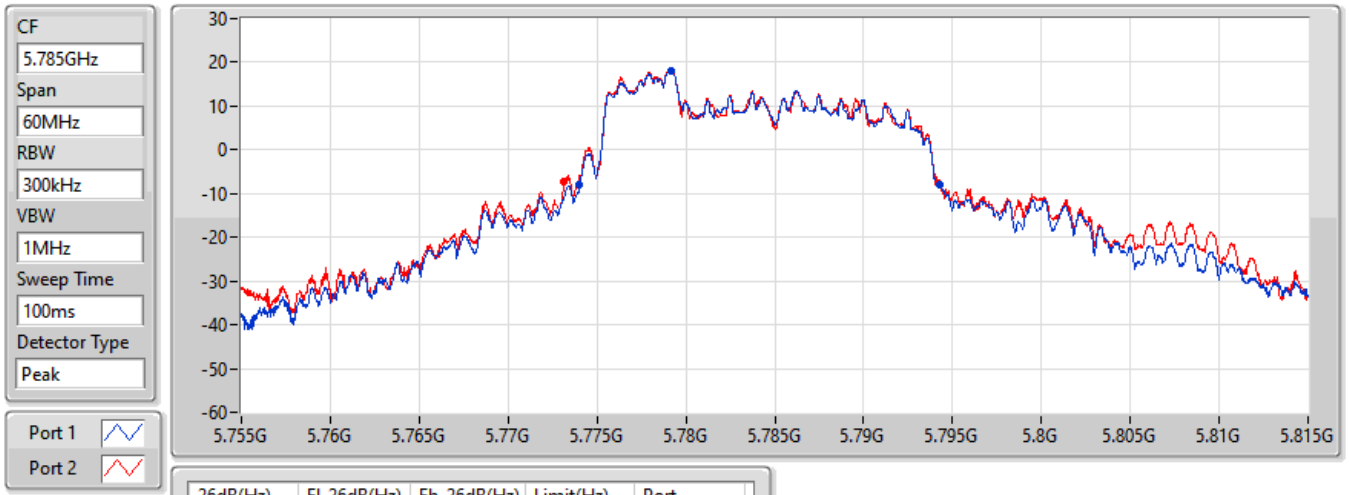


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
20.22M	5.77402G	5.79424G	Inf	1
21.03M	5.77315G	5.79418G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz

04/06/2022

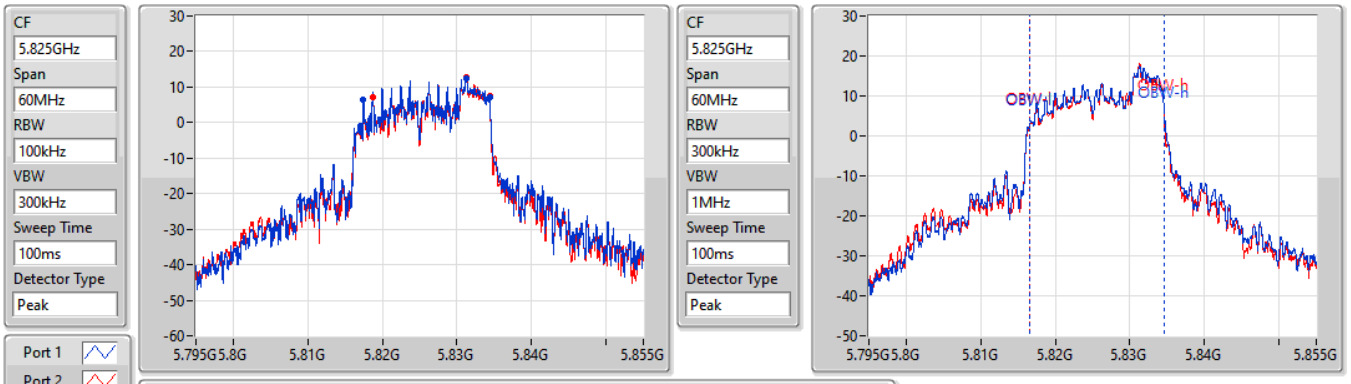


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.95M	5.81744G	5.83439G	18.051M	5.816604G	5.834655G	500k	1
15.72M	5.81867G	5.83439G	17.931M	5.816634G	5.834565G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz

04/06/2022

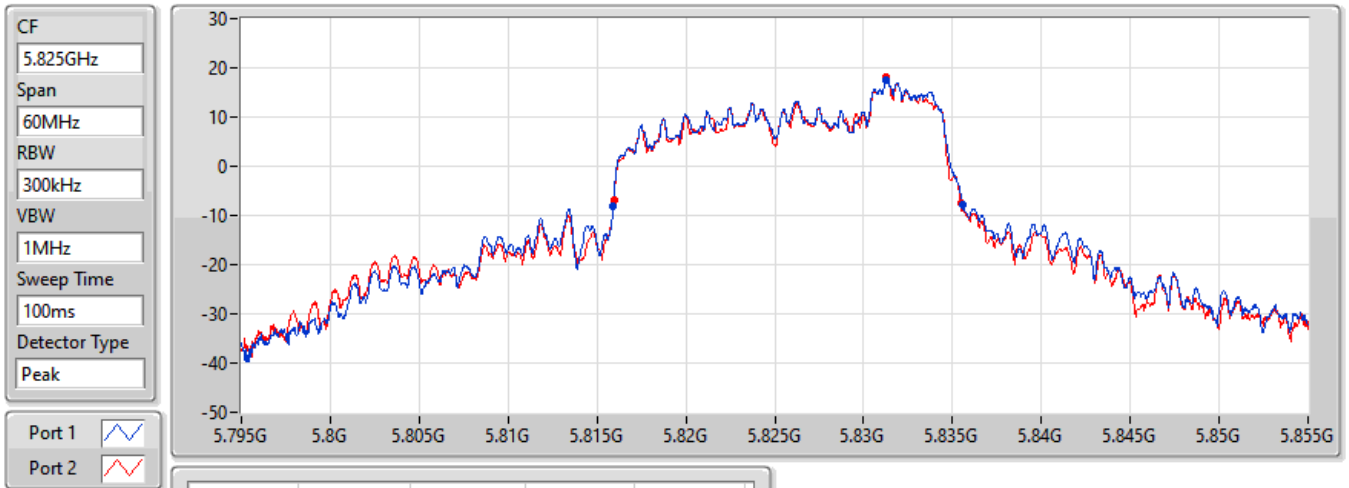

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.65M	5.81591G	5.83556G	Inf	1
19.53M	5.81594G	5.83547G	Inf	2

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.05M	17.721M	17M7D1D	18.96M	17.601M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.17M	17.751M	17M8D1D	19.02M	17.691M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.14M	17.751M	17M8D1D	14.82M	14.333M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	16.95M	18.051M	18M1D1D	2.54M	3.798M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	19.05M	17.631M	19.05M	17.721M
5200MHz	Pass	Inf	19.02M	17.601M	19.05M	17.691M
5240MHz	Pass	Inf	19.02M	17.631M	18.96M	17.661M
5260MHz	Pass	Inf	19.14M	17.691M	19.17M	17.721M
5300MHz	Pass	Inf	19.11M	17.691M	19.05M	17.691M
5320MHz	Pass	Inf	19.11M	17.691M	19.02M	17.751M
5500MHz	Pass	Inf	19.05M	17.631M	18.93M	17.601M
5580MHz	Pass	Inf	19.02M	17.631M	19.08M	17.721M
5700MHz	Pass	Inf	19.14M	17.691M	18.96M	17.751M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	14.85M	14.363M	14.82M	14.333M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.54M	3.798M	2.54M	3.838M
5745MHz	Pass	500k	16.92M	17.931M	16.95M	18.051M
5785MHz	Pass	500k	16.95M	17.901M	16.95M	18.051M
5825MHz	Pass	500k	16.92M	18.021M	15.06M	18.051M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5180MHz

21/05/2022

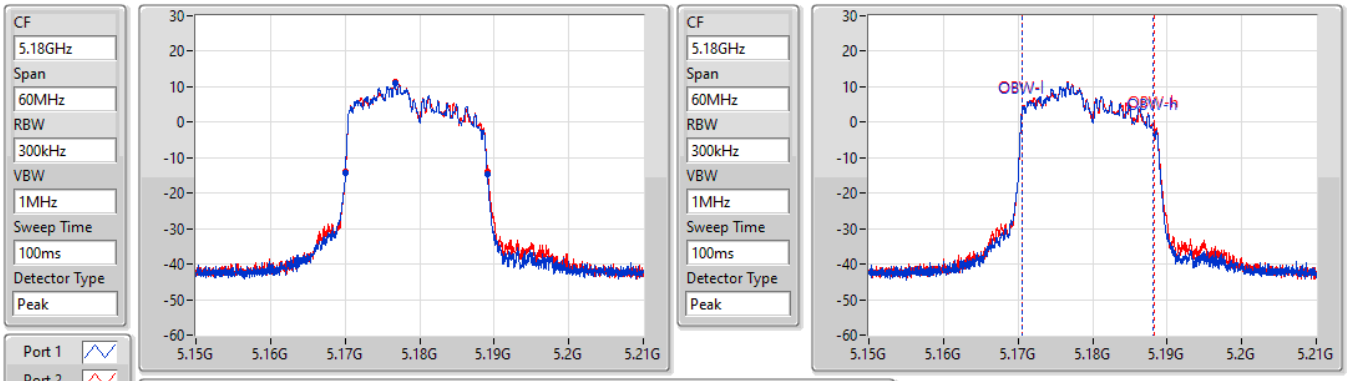


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.05M	5.17004G	5.18909G	17.631M	5.170525G	5.188156G	Inf	1
19.05M	5.17007G	5.18912G	17.721M	5.170525G	5.188246G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5200MHz


21/05/2022

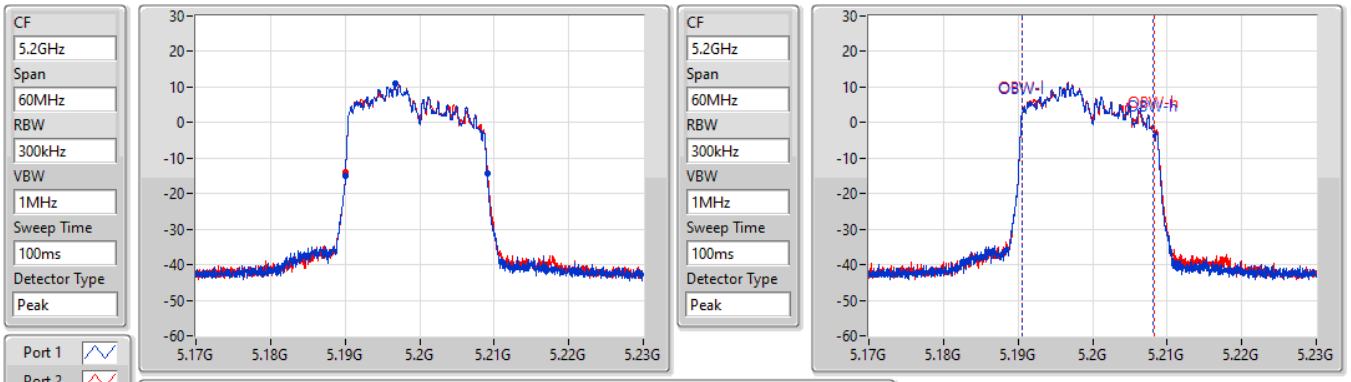

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.02M	5.19004G	5.20906G	17.601M	5.190555G	5.208156G	Inf	1
19.05M	5.19007G	5.20912G	17.691M	5.190555G	5.208246G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5240MHz

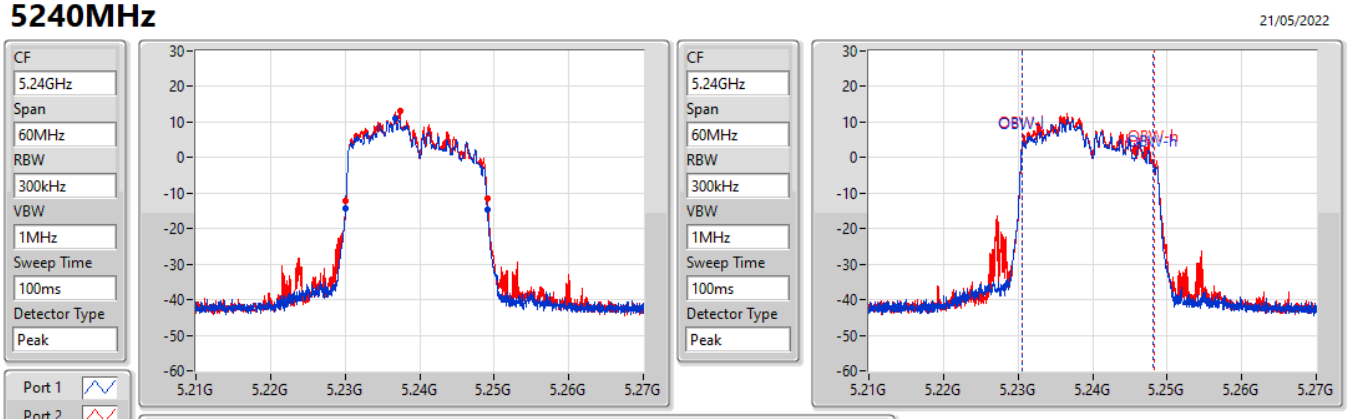

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.02M	5.23007G	5.24909G	17.631M	5.230555G	5.248186G	Inf	1
18.96M	5.23013G	5.24909G	17.661M	5.230555G	5.248216G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5260MHz

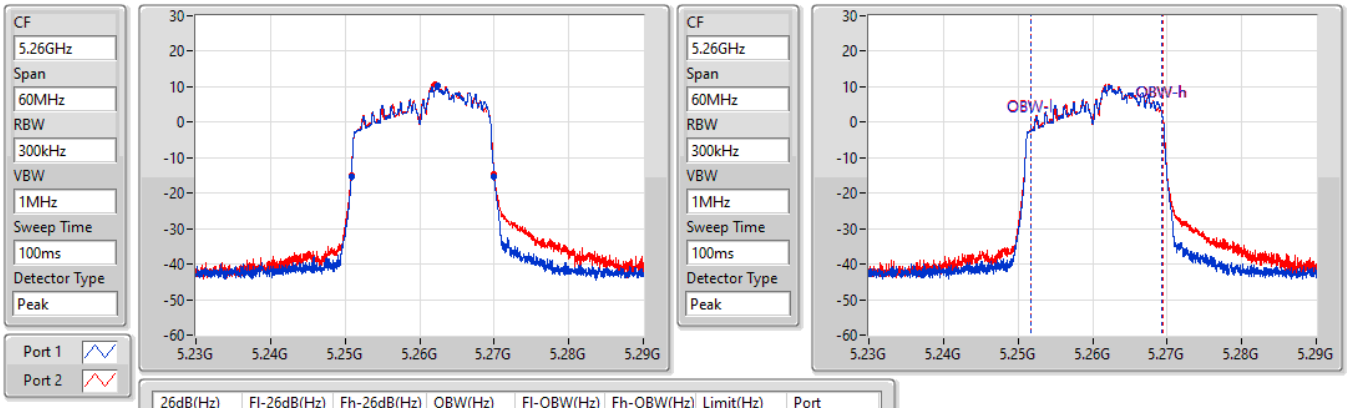

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.14M	5.25085G	5.26999G	17.691M	5.251664G	5.269355G	Inf	1
19.17M	5.25082G	5.26999G	17.721M	5.251664G	5.269385G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5300MHz

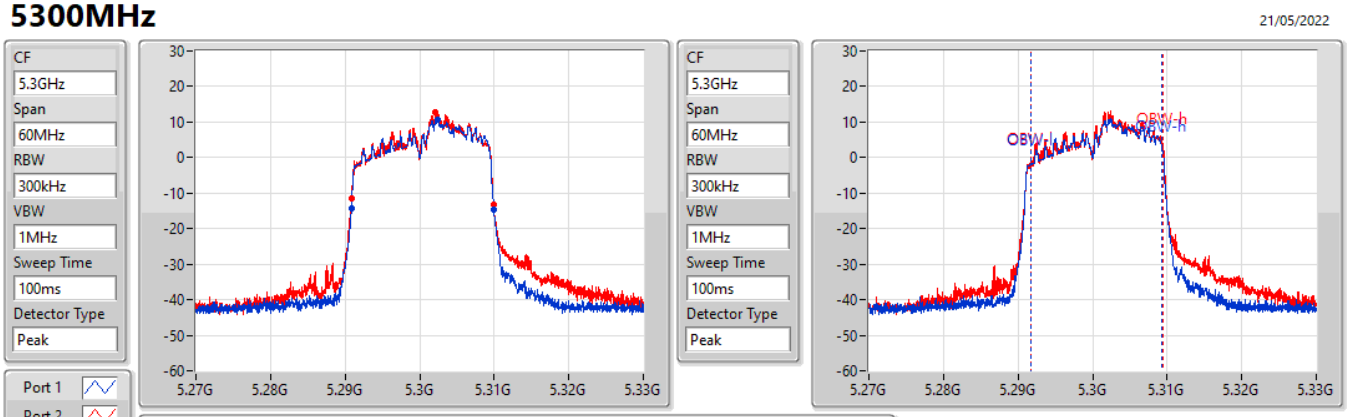

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.29085G	5.30996G	17.691M	5.291664G	5.309355G	Inf	1
19.05M	5.29085G	5.3099G	17.691M	5.291724G	5.309415G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5320MHz

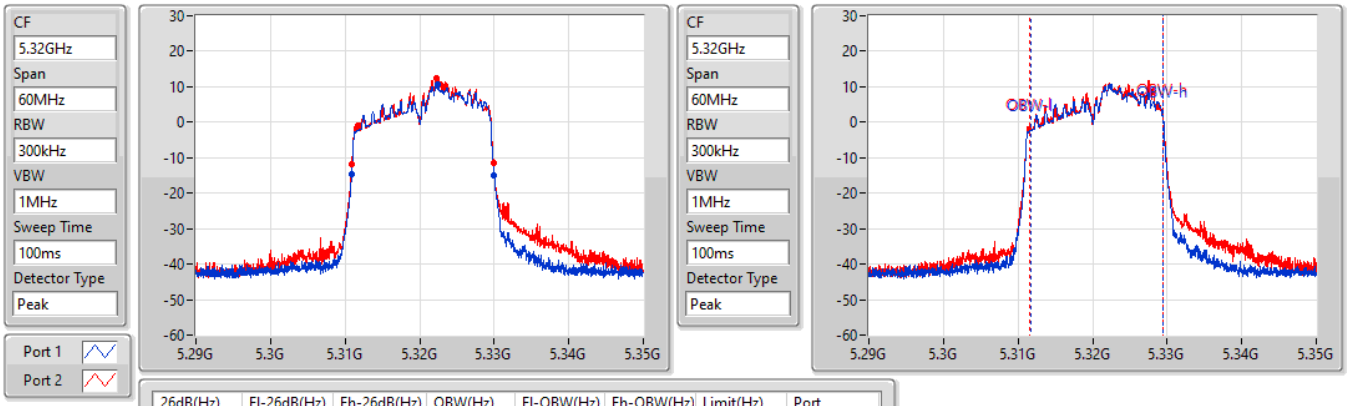

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.31088G	5.32999G	17.691M	5.311694G	5.329385G	Inf	1
19.02M	5.31091G	5.32993G	17.751M	5.311634G	5.329385G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5500MHz

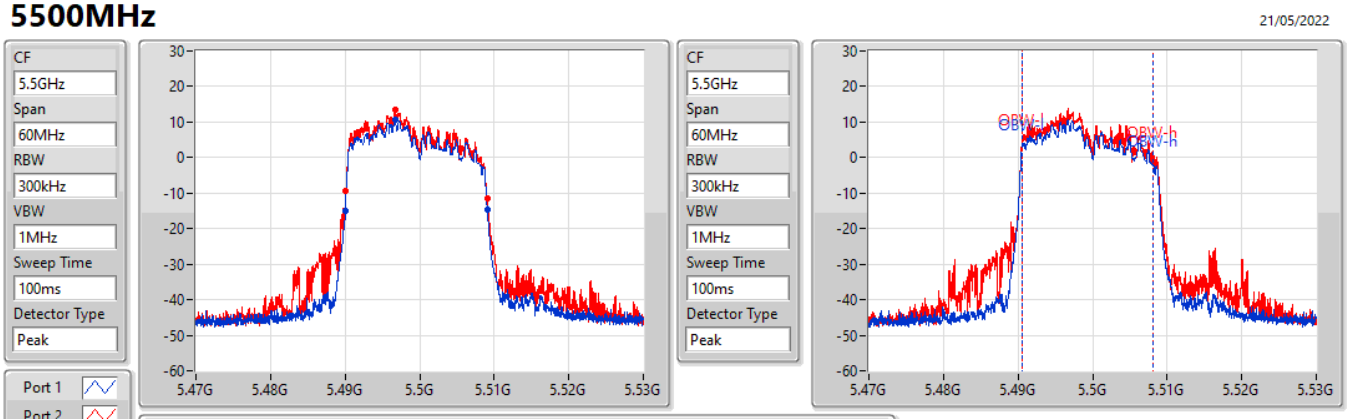

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.05M	5.49004G	5.50909G	17.631M	5.490555G	5.508186G	Inf	1
18.93M	5.4901G	5.50903G	17.601M	5.490585G	5.508186G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5580MHz

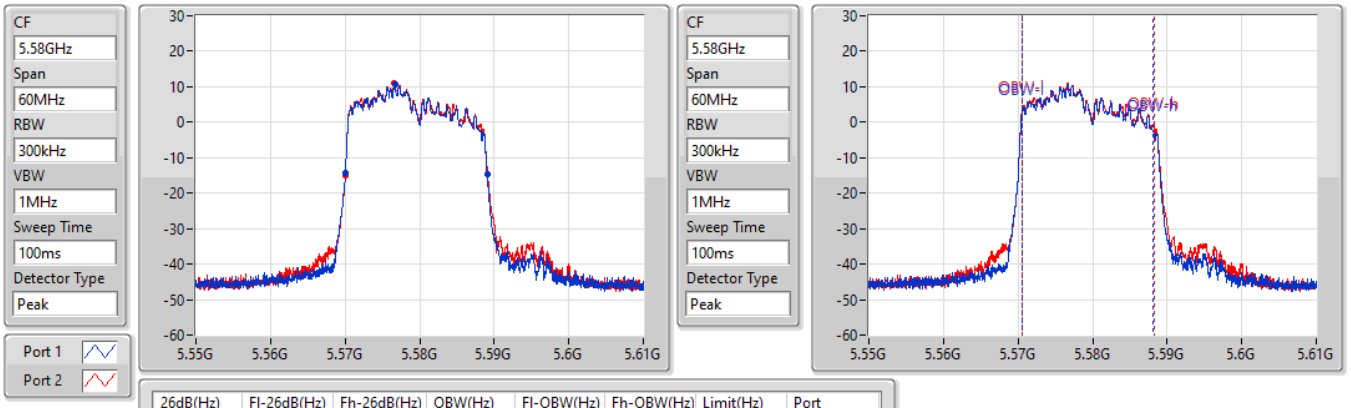


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.02M	5.57004G	5.58906G	17.631M	5.570525G	5.588156G	Inf	1
19.08M	5.57004G	5.58912G	17.721M	5.570525G	5.588246G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5700MHz

21/05/2022

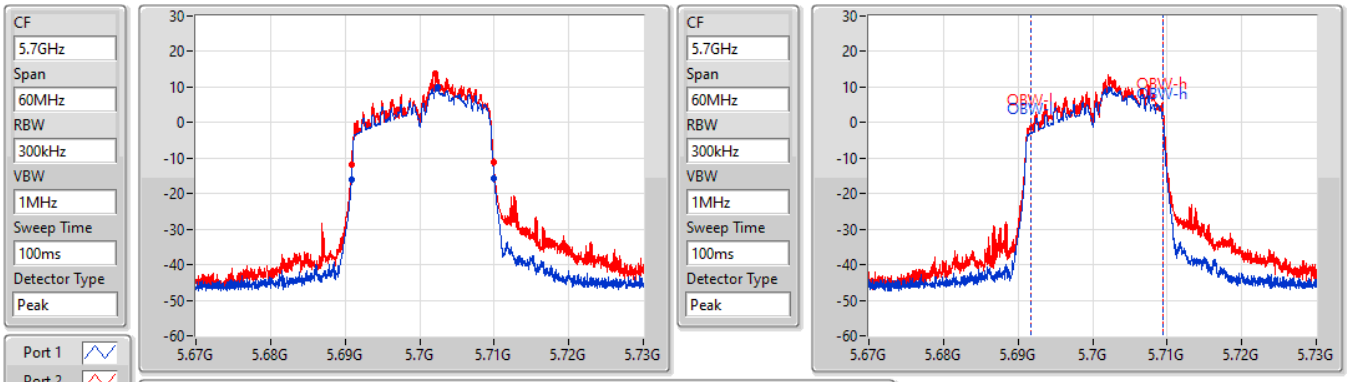


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.14M	5.69085G	5.70999G	17.691M	5.691694G	5.709385G	Inf	1
18.96M	5.69094G	5.7099G	17.751M	5.691694G	5.709445G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.47-5.725GHz

04/06/2022

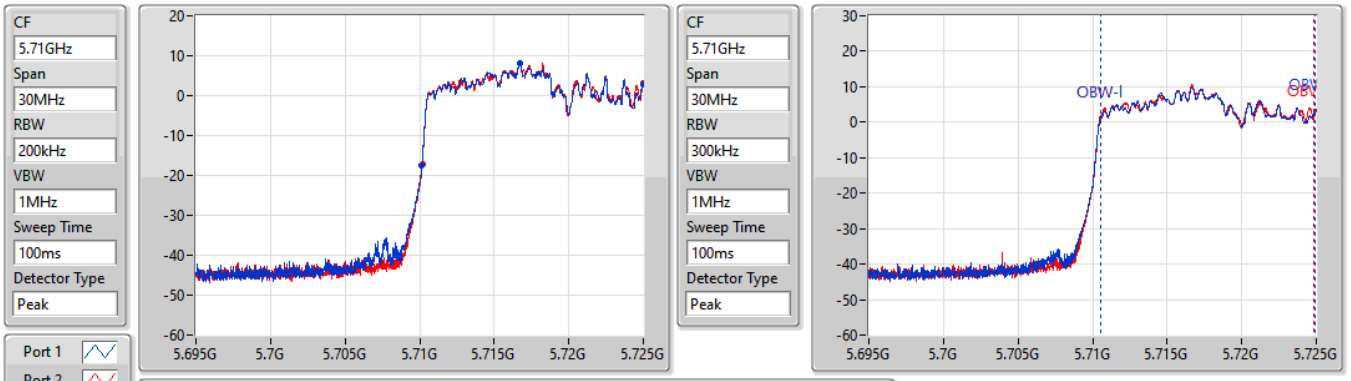


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.85M	5.71015G	5.725G	14.363M	5.71054G	5.724903G	Inf	1
14.82M	5.71018G	5.725G	14.333M	5.71054G	5.724873G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

04/06/2022

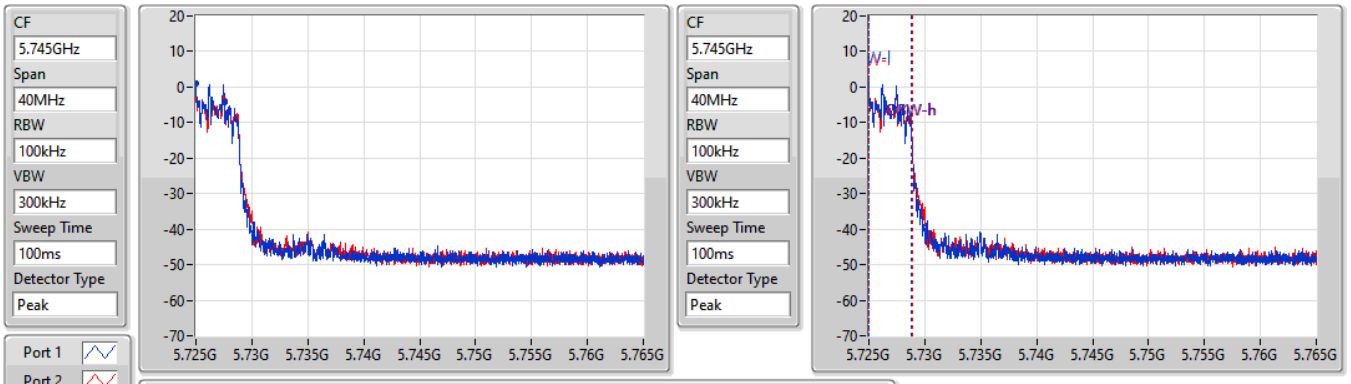


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.54M	5.725G	5.72754G	3.798M	5.72501G	5.728808G	500k	1
2.54M	5.725G	5.72754G	3.838M	5.72501G	5.728848G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

04/06/2022

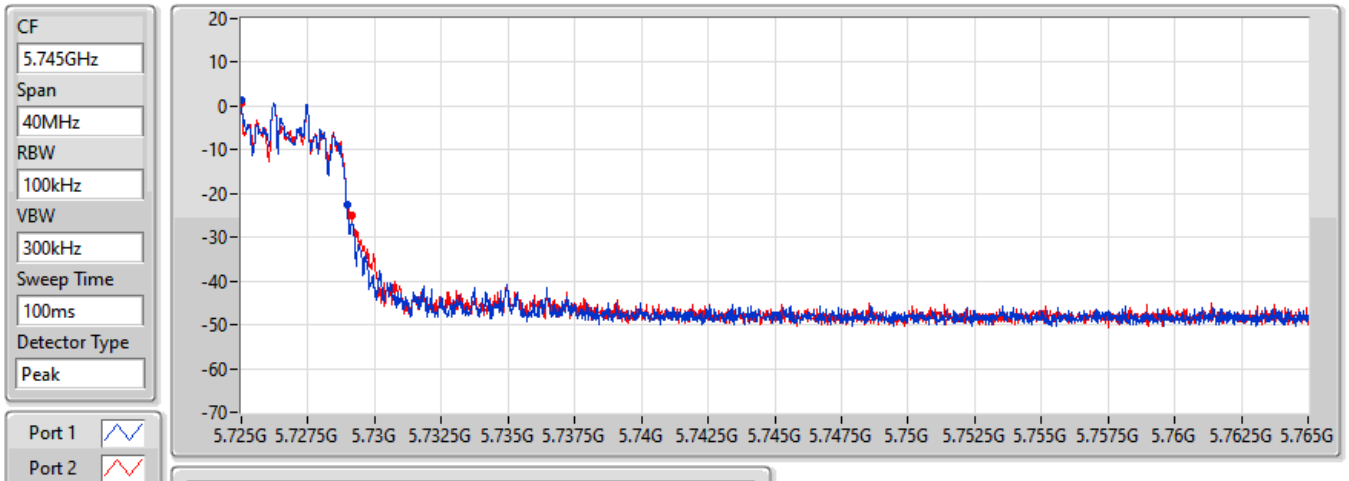


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
3.96M	5.725G	5.72896G	Inf	1
4.14M	5.725G	5.72914G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

04/06/2022

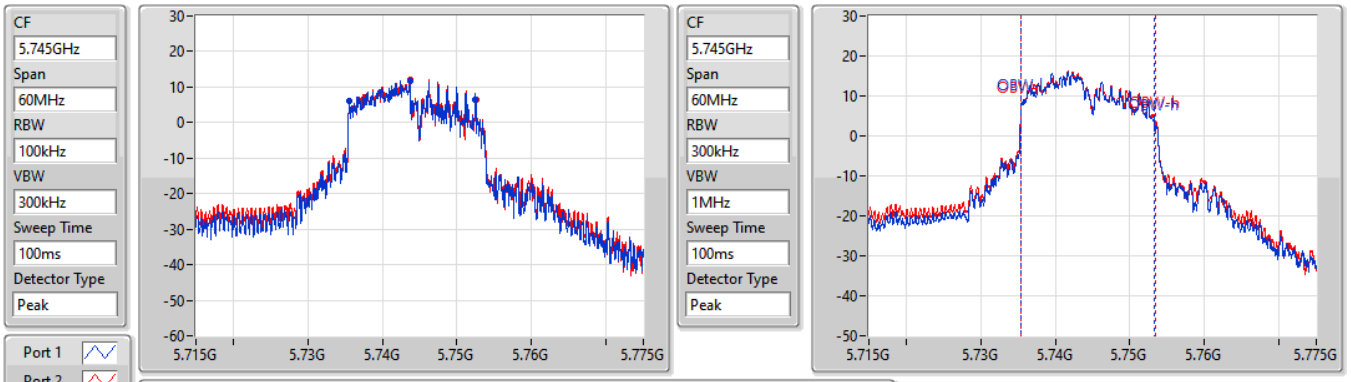


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.92M	5.73558G	5.7525G	17.931M	5.735405G	5.753336G	500k	1
16.95M	5.73558G	5.75253G	18.051M	5.7353375G	5.753426G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz


04/06/2022

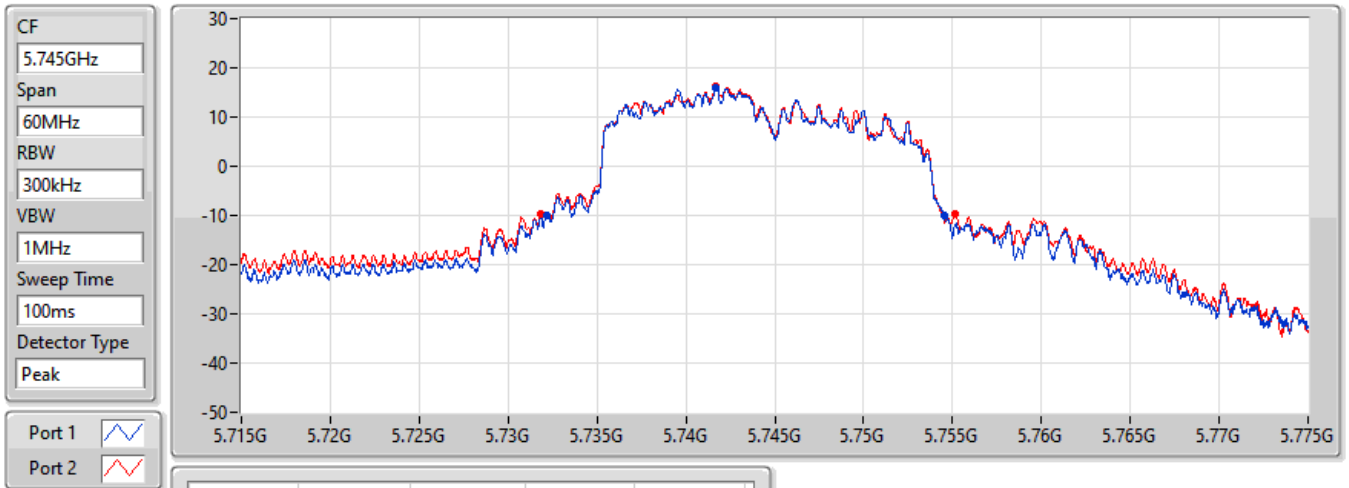

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
22.35M	5.73219G	5.75454G	Inf	1
23.37M	5.7318G	5.75517G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5785MHz

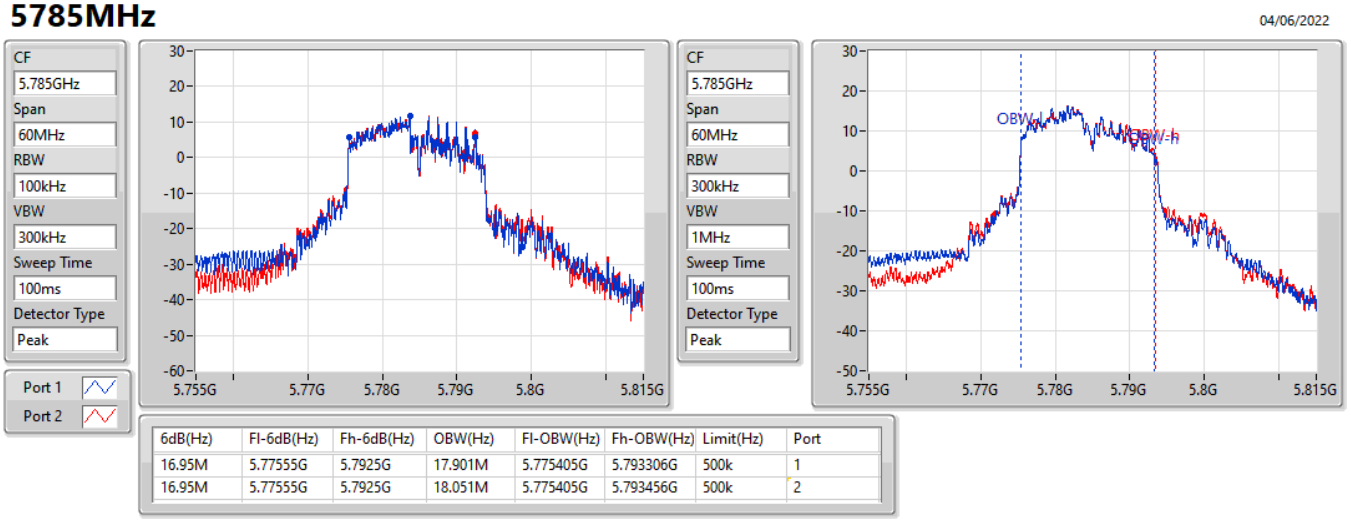

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.95M	5.77555G	5.7925G	17.901M	5.775405G	5.793306G	500k	1
16.95M	5.77555G	5.7925G	18.051M	5.7754O5G	5.793456G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5785MHz

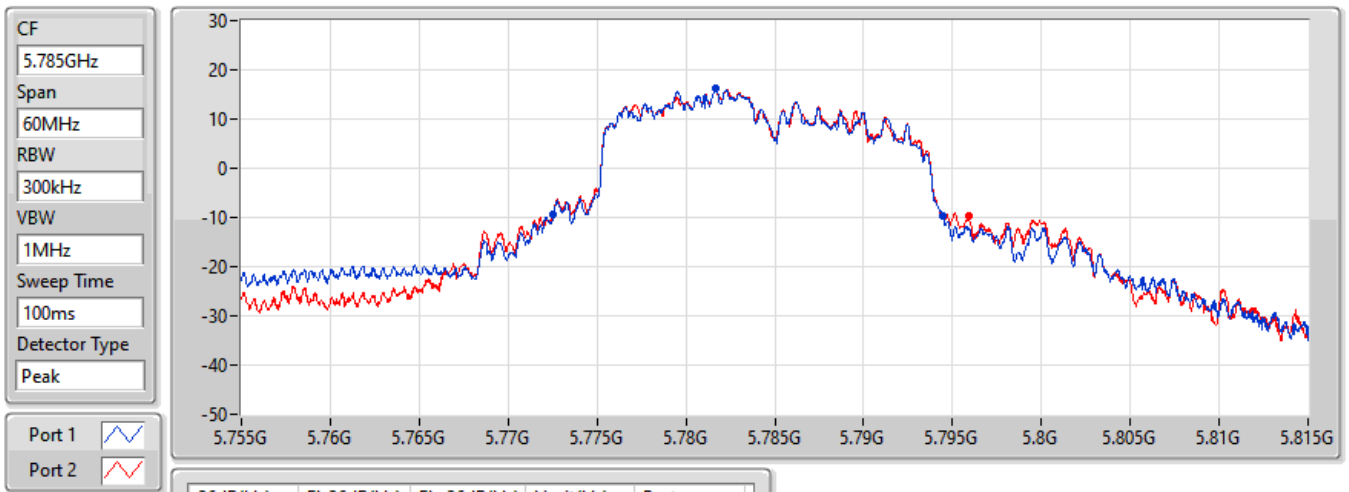

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
21.93M	5.77255G	5.79448G	Inf	1
23.34M	5.77255G	5.79589G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5825MHz

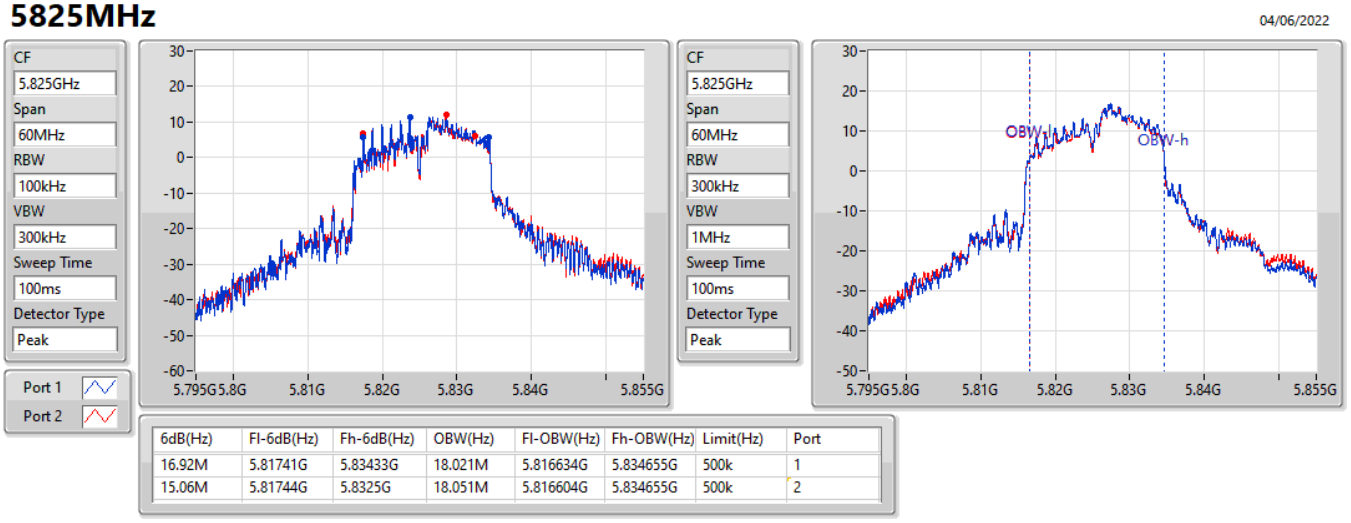

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.92M	5.81741G	5.83433G	18.021M	5.816634G	5.834655G	500k	1
15.06M	5.81744G	5.8325G	18.051M	5.816604G	5.834655G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz

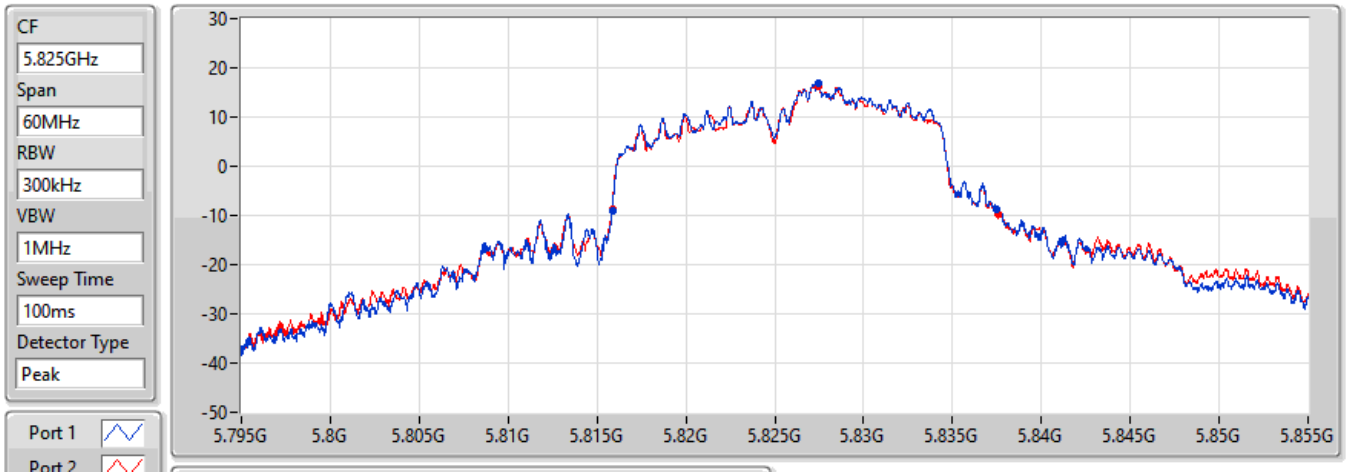

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
21.66M	5.81585G	5.83751G	Inf	1
21.69M	5.81585G	5.83754G	Inf	2

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.32M	17.421M	17M4D1D	18.9M	17.151M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.32M	17.841M	17M8D1D	19.23M	17.541M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.29M	17.871M	17M9D1D	15.15M	14.423M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	14.46M	17.901M	17M9D1D	2.64M	3.738M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	18.9M	17.391M	18.96M	17.301M
5200MHz	Pass	Inf	19.23M	17.301M	19.26M	17.151M
5240MHz	Pass	Inf	19.02M	17.391M	19.32M	17.421M
5260MHz	Pass	Inf	19.23M	17.751M	19.32M	17.661M
5300MHz	Pass	Inf	19.26M	17.541M	19.26M	17.571M
5320MHz	Pass	Inf	19.23M	17.631M	19.29M	17.841M
5500MHz	Pass	Inf	19.2M	17.601M	19.29M	17.751M
5580MHz	Pass	Inf	19.26M	17.511M	19.17M	17.871M
5700MHz	Pass	Inf	19.23M	17.721M	19.17M	17.661M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.195M	14.573M	15.15M	14.423M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.64M	3.818M	2.78M	3.738M
5745MHz	Pass	500k	14.46M	17.751M	14.46M	17.901M
5785MHz	Pass	500k	14.46M	17.361M	13.23M	17.421M
5825MHz	Pass	500k	13.26M	17.571M	12M	17.871M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5180MHz

21/05/2022

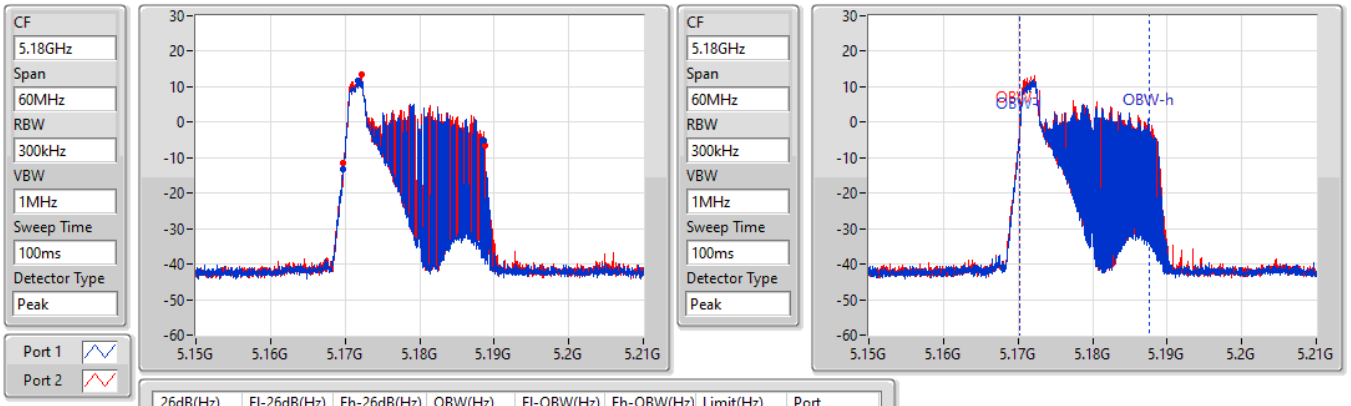


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
18.9M	5.16977G	5.18867G	17.391M	5.170285G	5.187676G	Inf	1
18.96M	5.1698G	5.18876G	17.301M	5.170285G	5.187586G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5200MHz


21/05/2022

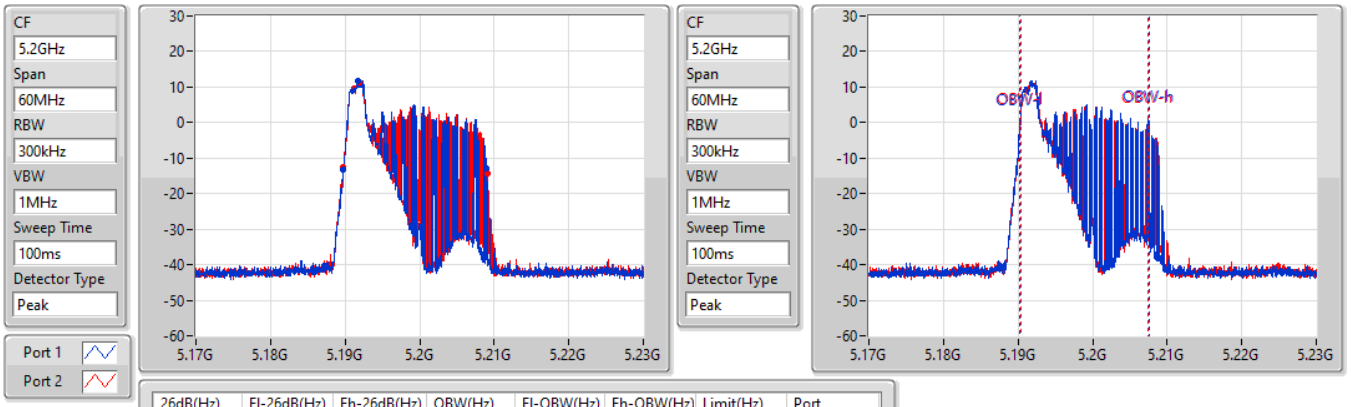

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.23M	5.18971G	5.20894G	17.301M	5.190255G	5.207556G	Inf	1
19.26M	5.18977G	5.20903G	17.151M	5.190315G	5.207466G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5240MHz

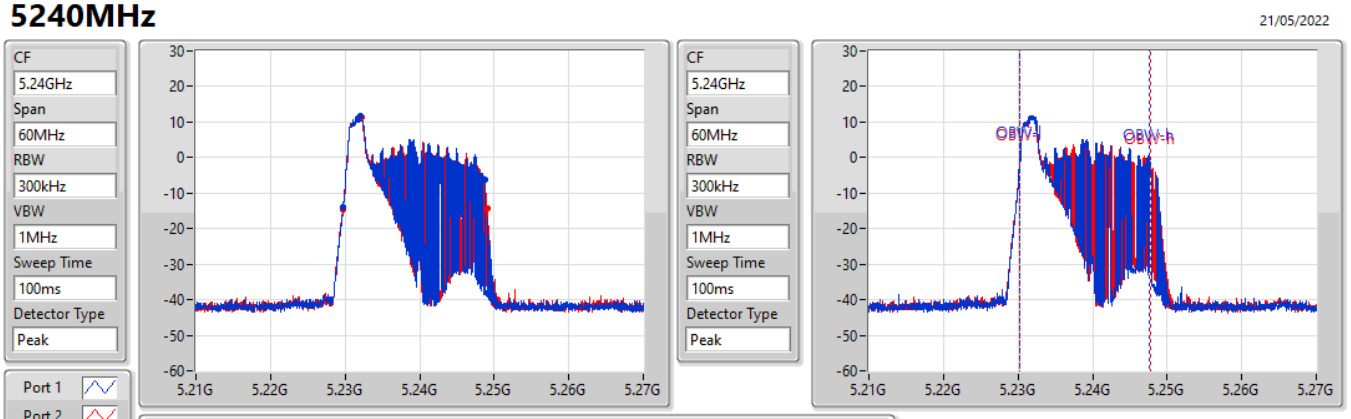

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.02M	5.22971G	5.24873G	17.391M	5.230285G	5.247676G	Inf	1
19.32M	5.22971G	5.24903G	17.421M	5.230285G	5.247706G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5260MHz

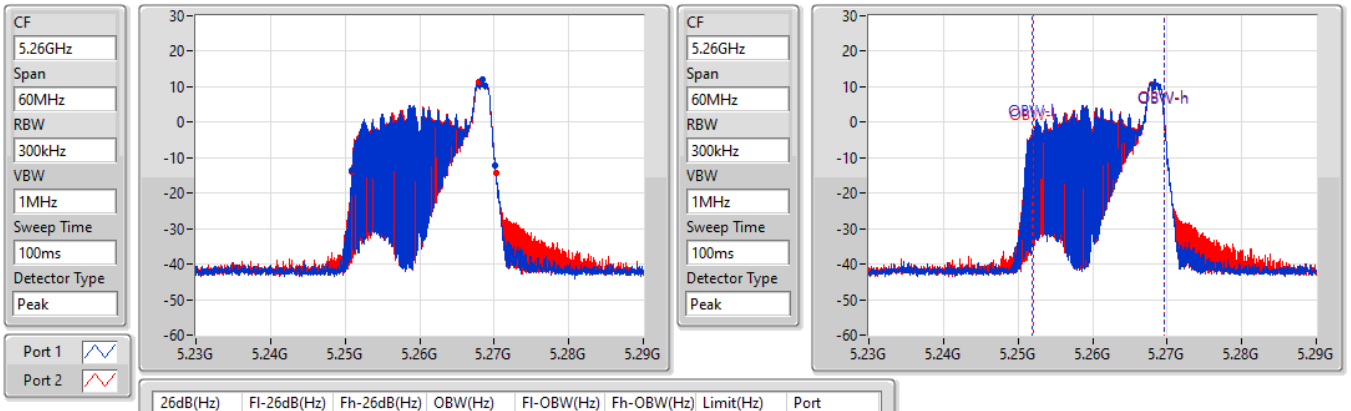


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.23M	5.25094G	5.27017G	17.751M	5.251904G	5.269655G	Inf	1
19.32M	5.25091G	5.27023G	17.661M	5.251994G	5.269655G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5300MHz

21/05/2022

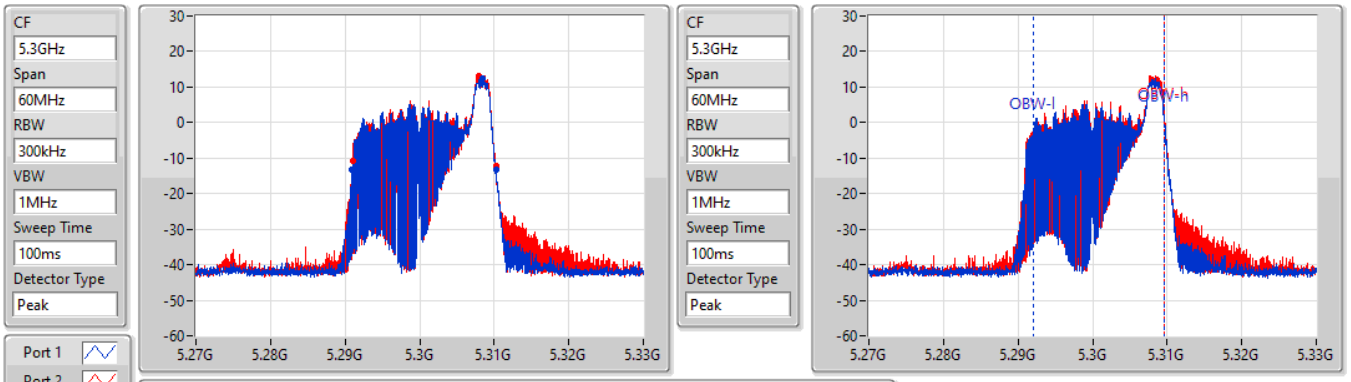


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.26M	5.29094G	5.3102G	17.541M	5.292114G	5.309655G	Inf	1
19.26M	5.291G	5.31026G	17.571M	5.292054G	5.309625G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5320MHz

21/05/2022

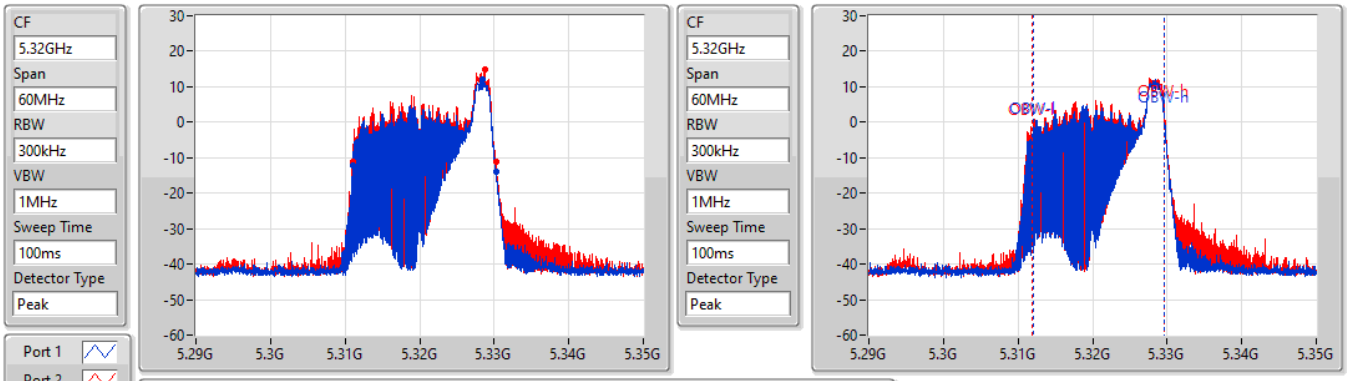


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.23M	5.311G	5.33023G	17.631M	5.312024G	5.329655G	Inf	1
19.29M	5.311G	5.33029G	17.841M	5.311814G	5.329655G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5500MHz

21/05/2022

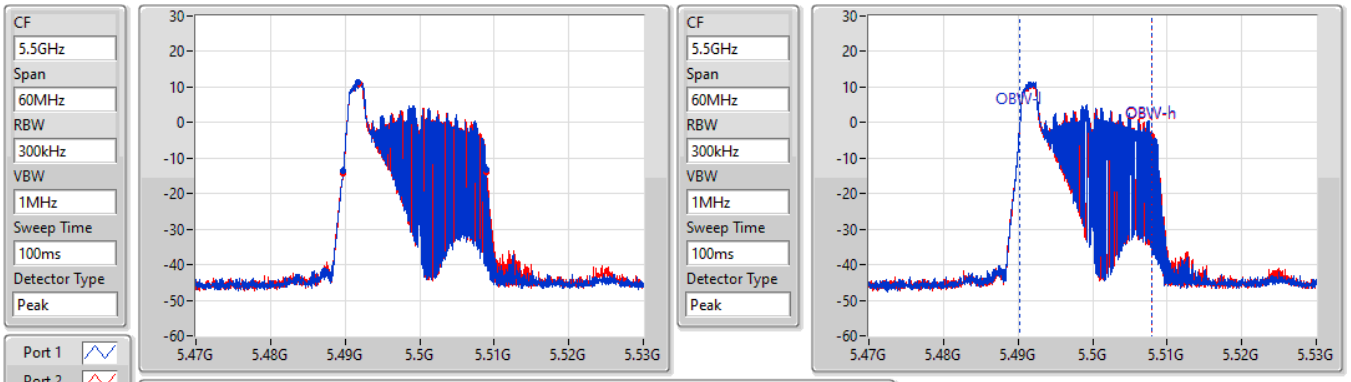


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.2M	5.48971G	5.50891G	17.601M	5.490285G	5.507886G	Inf	1
19.29M	5.48968G	5.50897G	17.751M	5.490255G	5.508006G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5580MHz

21/05/2022

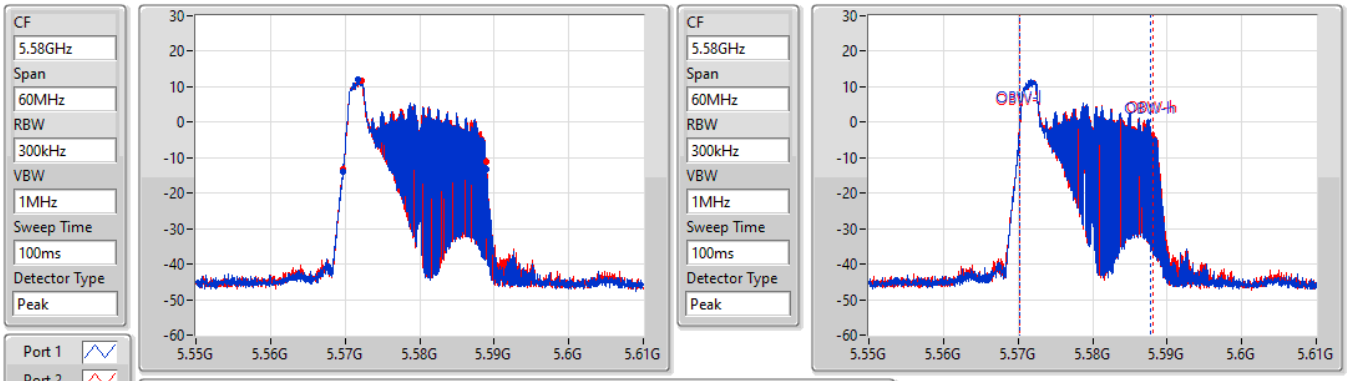


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.26M	5.56968G	5.58894G	17.511M	5.570285G	5.587796G	Inf	1
19.17M	5.56974G	5.58891G	17.871M	5.570285G	5.588156G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5700MHz

21/05/2022

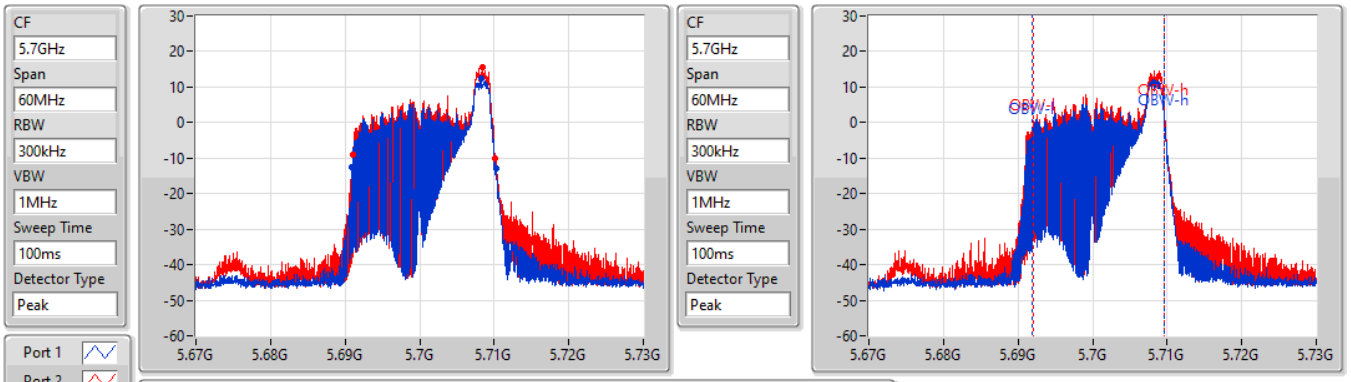


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.23M	5.69097G	5.7102G	17.721M	5.691934G	5.709655G	Inf	1
19.17M	5.691G	5.71017G	17.661M	5.691994G	5.709655G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.47-5.725GHz

04/06/2022

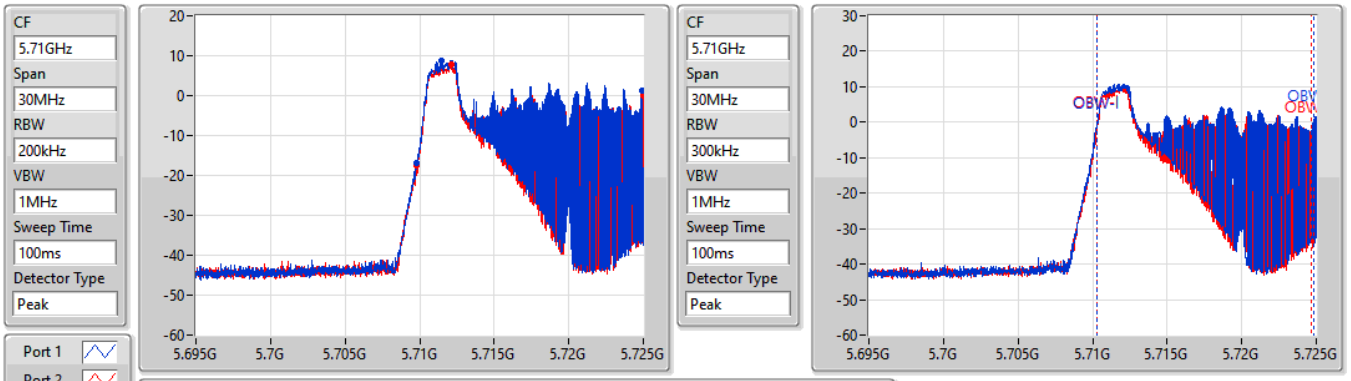


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.195M	5.70976G	5.724955G	14.573M	5.710255G	5.724828G	Inf	1
15.15M	5.70982G	5.72497G	14.423M	5.71027G	5.724693G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX **EBW**

5720MHz Straddle 5.725-5.85GHz

04/06/2022

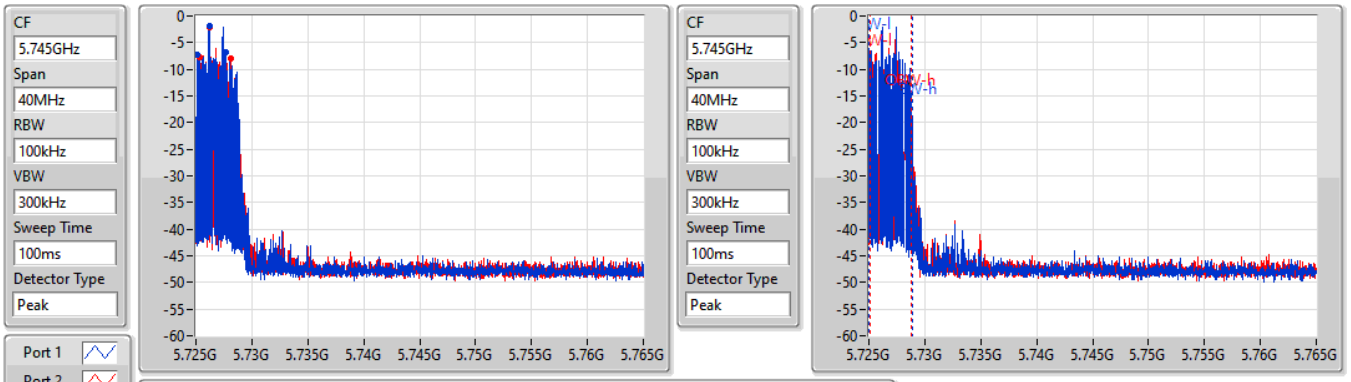


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.64M	5.72506G	5.7277G	3.818M	5.72503G	5.728848G	500k	1
2.78M	5.7253G	5.72808G	3.738M	5.72509G	5.728828G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX **EBW**

5720MHz Straddle 5.725-5.85GHz


04/06/2022

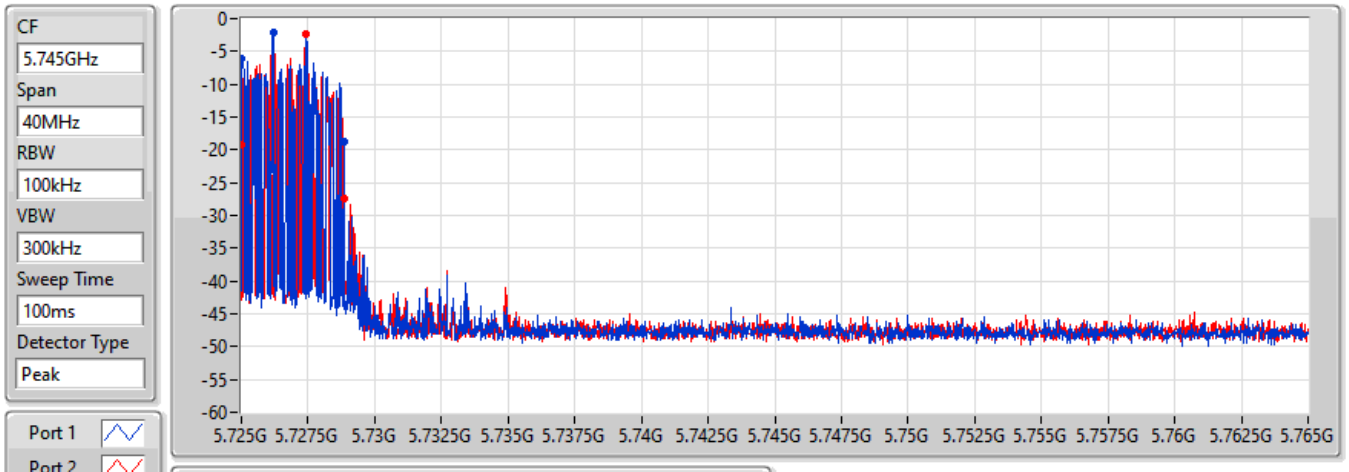

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
3.84M	5.72502G	5.72886G	Inf	1
3.84M	5.725G	5.72884G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5745MHz

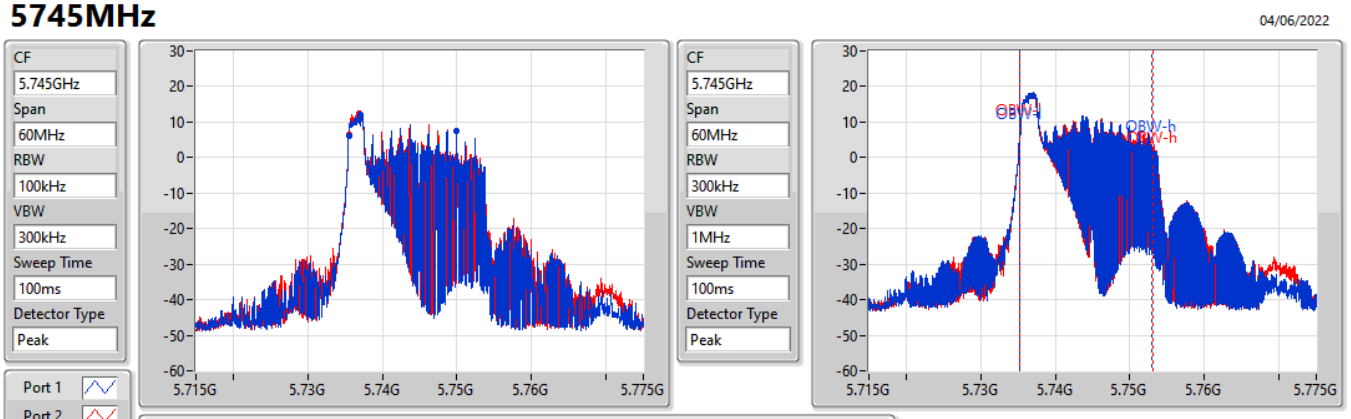

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.46M	5.73549G	5.74995G	17.751M	5.735255G	5.753006G	500k	1
14.46M	5.73549G	5.74995G	17.901M	5.7352555G	5.7531556G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

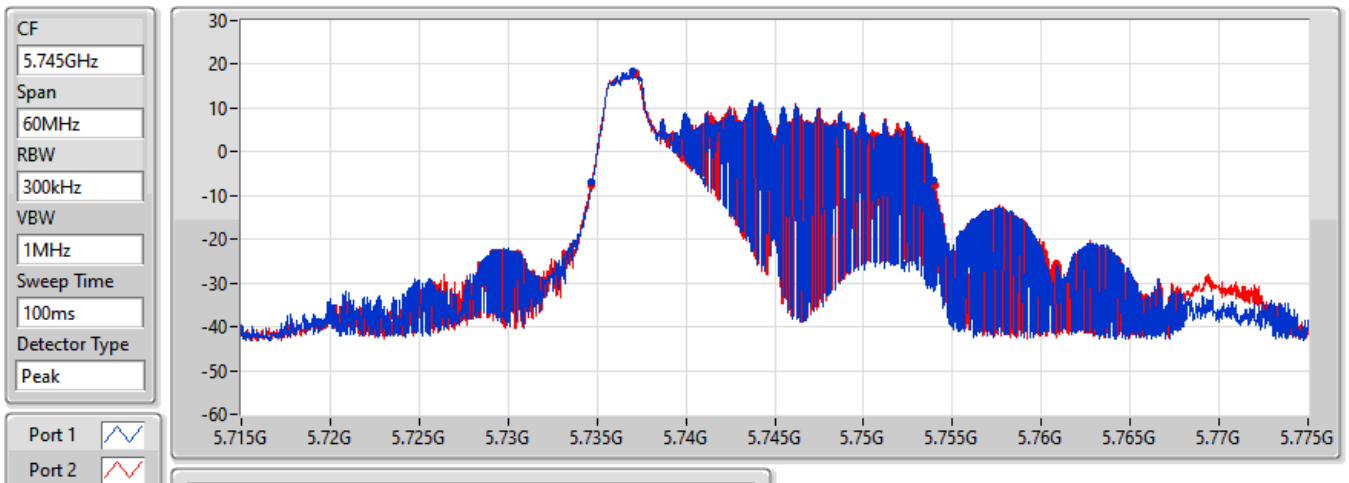


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.2M	5.73471G	5.75391G	Inf	1
19.35M	5.73465G	5.754G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz

04/06/2022

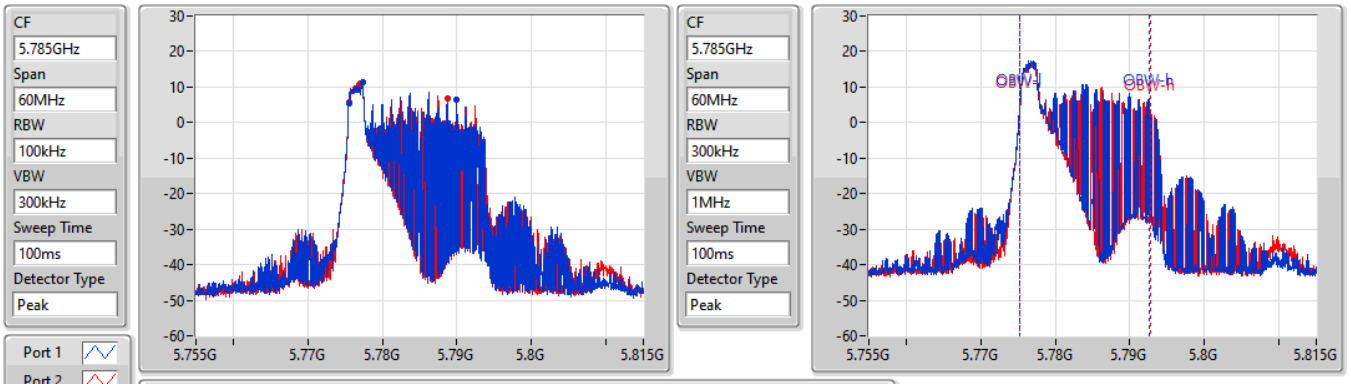


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.46M	5.77549G	5.78995G	17.361M	5.775285G	5.792646G	500k	1
13.23M	5.77549G	5.78872G	17.421M	5.775285G	5.792706G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz

04/06/2022

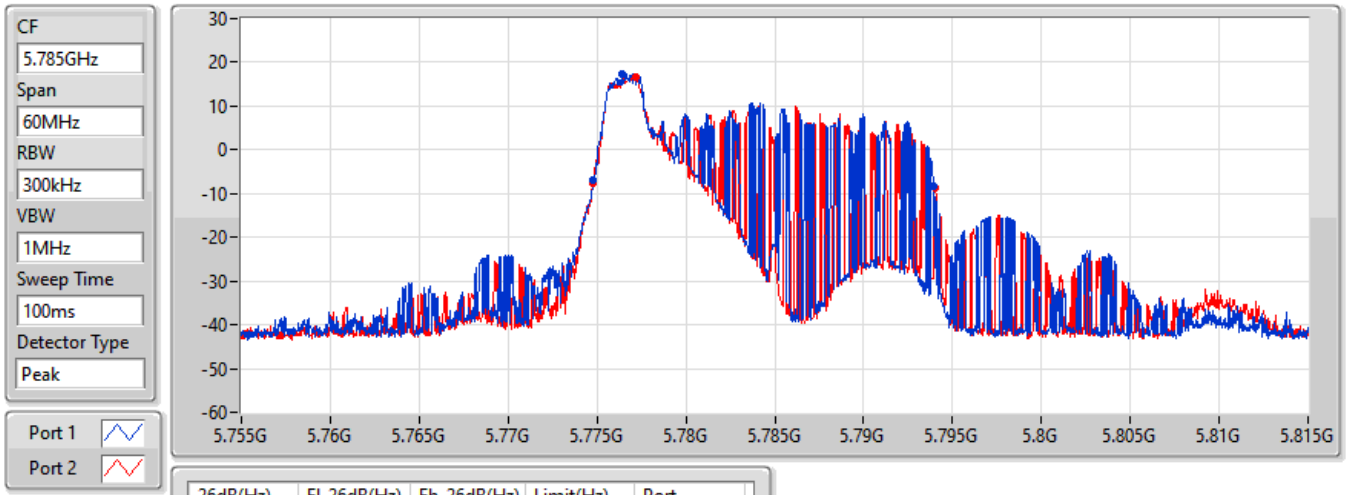


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.14M	5.7748G	5.79394G	Inf	1
19.26M	5.77474G	5.794G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz

04/06/2022

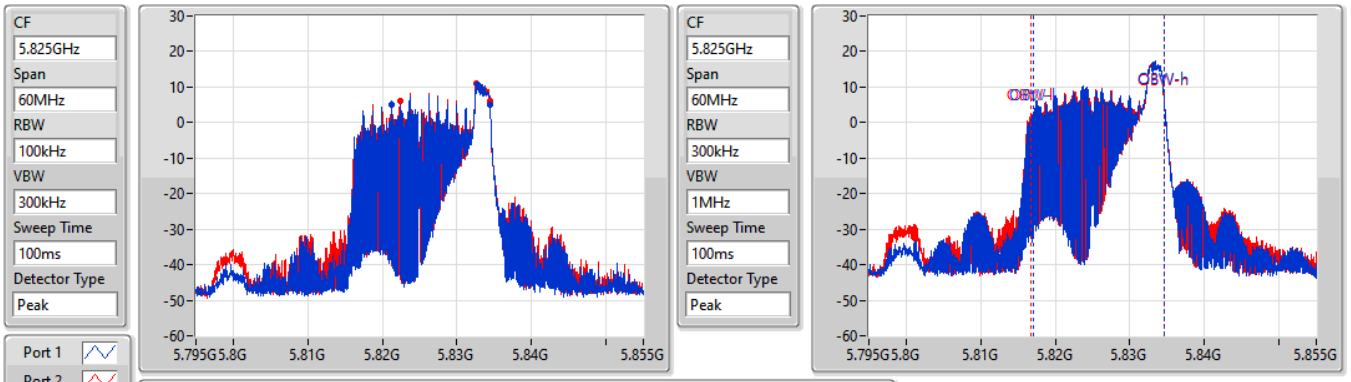


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
13.26M	5.82116G	5.83442G	17.571M	5.817084G	5.834655G	500k	1
12M	5.82242G	5.83442G	17.871M	5.816784G	5.834655G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz

04/06/2022

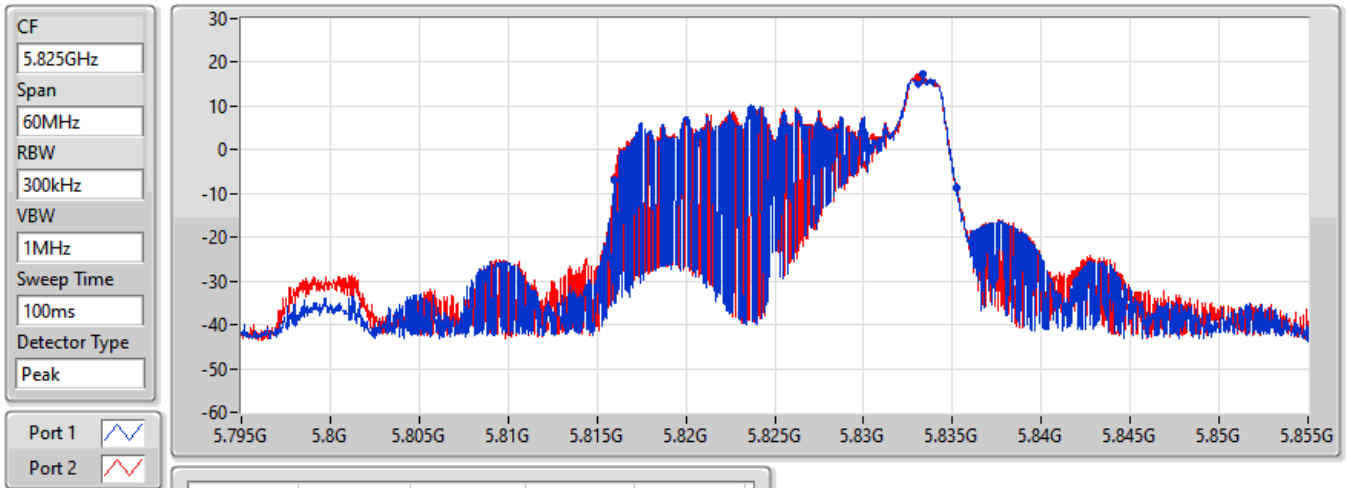

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.23M	5.816G	5.83523G	Inf	1
19.26M	5.816G	5.83526G	Inf	2

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.11M	17.811M	17M8D1D	19.05M	17.691M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.2M	17.901M	17M9D1D	19.11M	17.811M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.17M	17.841M	17M8D1D	14.925M	14.408M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	16.98M	18.021M	18M0D1D	2.52M	3.798M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	19.11M	17.691M	19.05M	17.751M
5200MHz	Pass	Inf	19.08M	17.691M	19.05M	17.781M
5240MHz	Pass	Inf	19.08M	17.691M	19.11M	17.811M
5260MHz	Pass	Inf	19.14M	17.841M	19.17M	17.841M
5300MHz	Pass	Inf	19.17M	17.841M	19.17M	17.901M
5320MHz	Pass	Inf	19.2M	17.841M	19.11M	17.811M
5500MHz	Pass	Inf	19.11M	17.691M	18.96M	17.781M
5580MHz	Pass	Inf	19.08M	17.691M	18.96M	17.781M
5700MHz	Pass	Inf	19.17M	17.811M	19.17M	17.841M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	15.03M	14.438M	14.925M	14.408M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.52M	3.798M	2.52M	3.818M
5745MHz	Pass	500k	16.98M	17.871M	16.95M	17.991M
5785MHz	Pass	500k	16.98M	17.871M	16.98M	18.021M
5825MHz	Pass	500k	16.95M	17.991M	15.69M	17.961M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5180MHz

21/05/2022

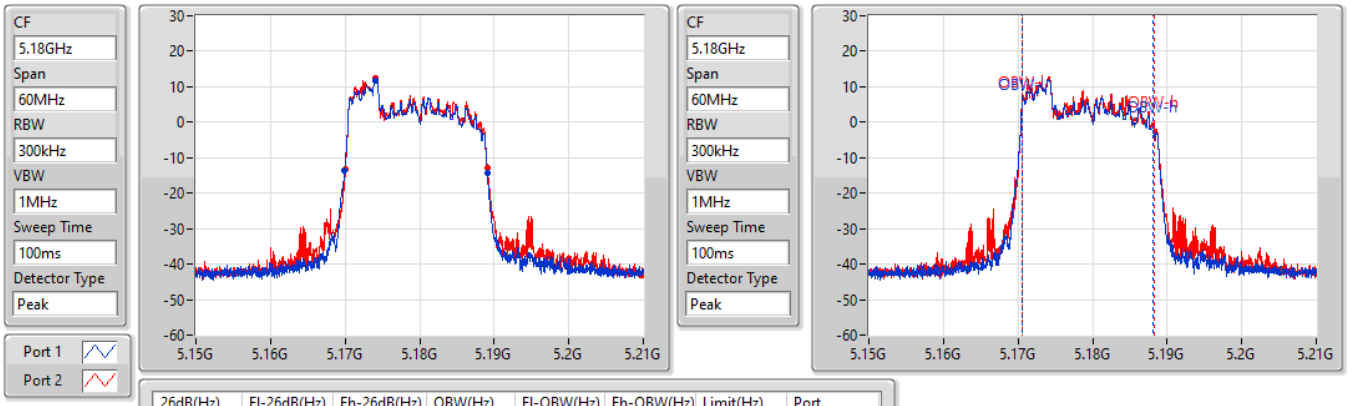


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.16995G	5.18906G	17.691M	5.170495G	5.188186G	Inf	1
19.05M	5.17004G	5.18909G	17.751M	5.170495G	5.188246G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5200MHz

21/05/2022

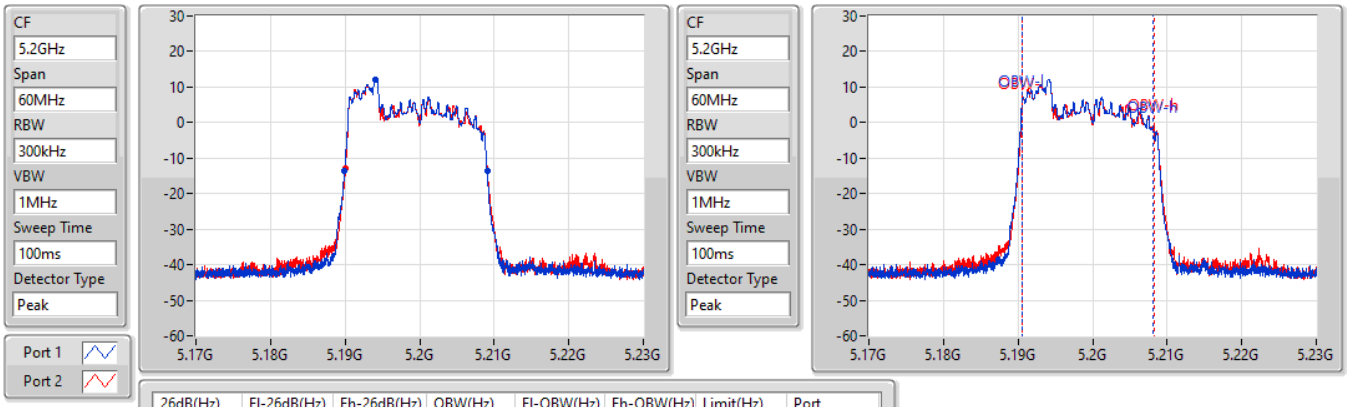


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.18995G	5.20903G	17.691M	5.190495G	5.208186G	Inf	1
19.05M	5.19004G	5.20909G	17.781M	5.190495G	5.208276G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5240MHz

21/05/2022

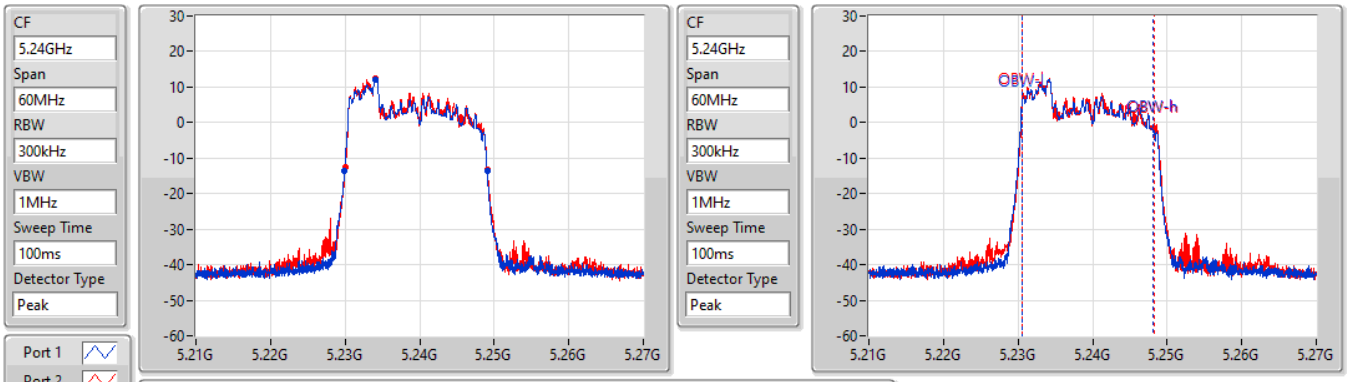


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.22995G	5.24903G	17.691M	5.230495G	5.248186G	Inf	1
19.11M	5.22998G	5.24909G	17.811M	5.230495G	5.248306G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5260MHz

21/05/2022

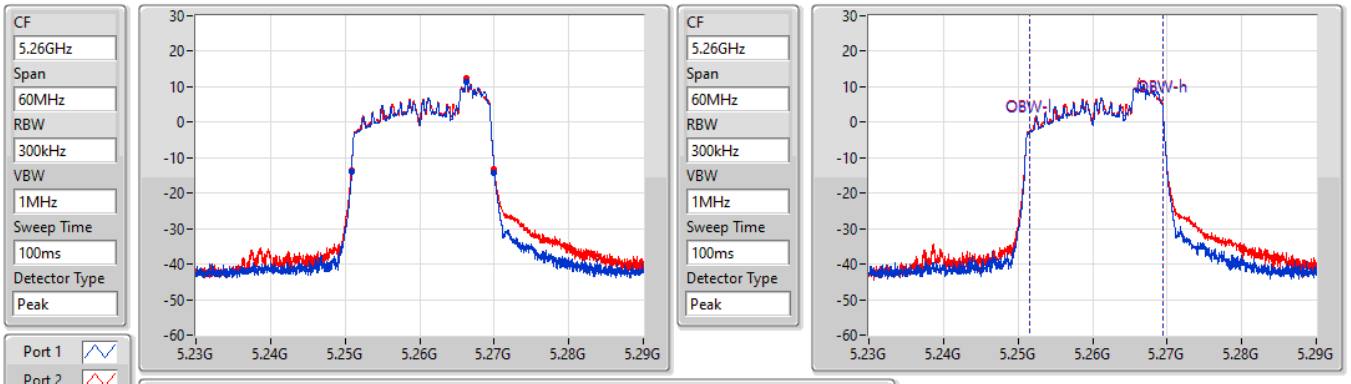


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.14M	5.25088G	5.27002G	17.841M	5.251604G	5.269445G	Inf	1
19.17M	5.25085G	5.27002G	17.841M	5.251604G	5.269445G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5300MHz

21/05/2022

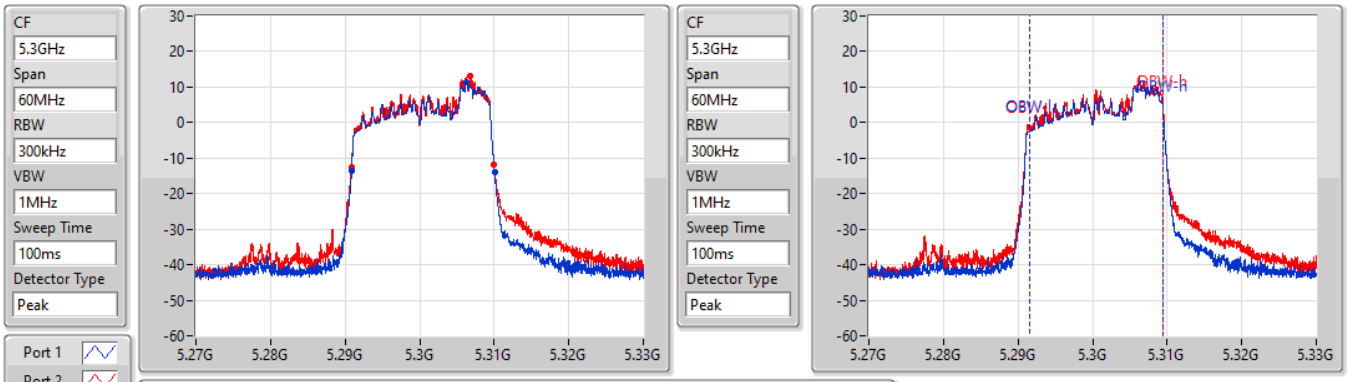


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.29088G	5.31005G	17.841M	5.291604G	5.309445G	Inf	1
19.17M	5.29082G	5.30999G	17.901M	5.291544G	5.309445G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5320MHz


21/05/2022

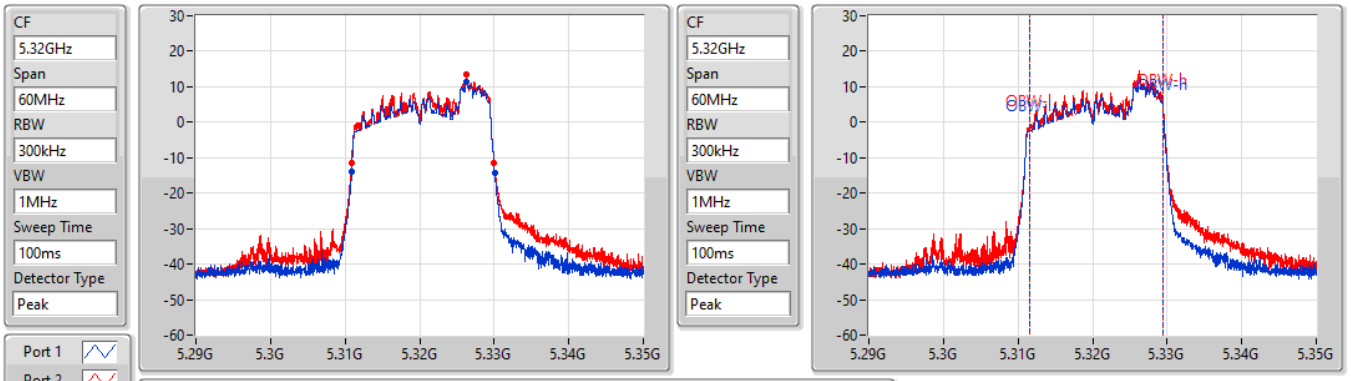

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.2M	5.31088G	5.33008G	17.841M	5.311604G	5.329445G	Inf	1
19.11M	5.31088G	5.32999G	17.811M	5.311634G	5.329445G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5500MHz

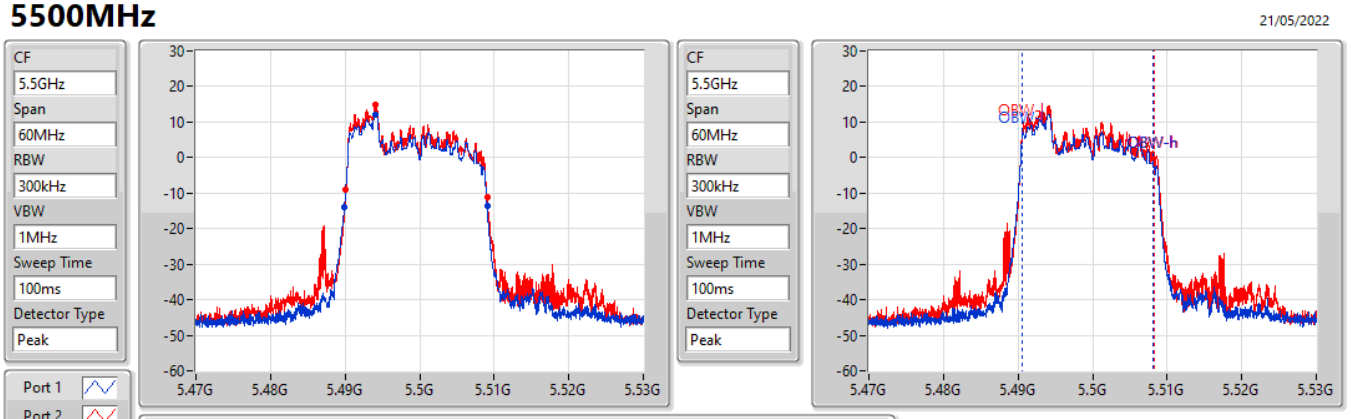

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.48992G	5.50903G	17.691M	5.490495G	5.508186G	Inf	1
18.96M	5.4901G	5.50906G	17.781M	5.490525G	5.508306G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5580MHz

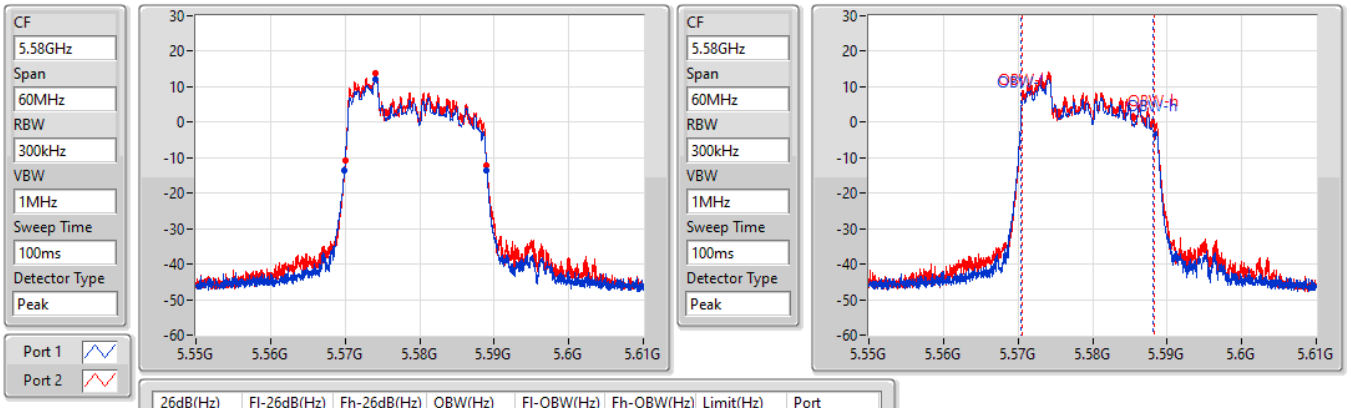


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.08M	5.56992G	5.589G	17.691M	5.570465G	5.588156G	Inf	1
18.96M	5.57004G	5.589G	17.781M	5.570495G	5.588276G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5700MHz

21/05/2022

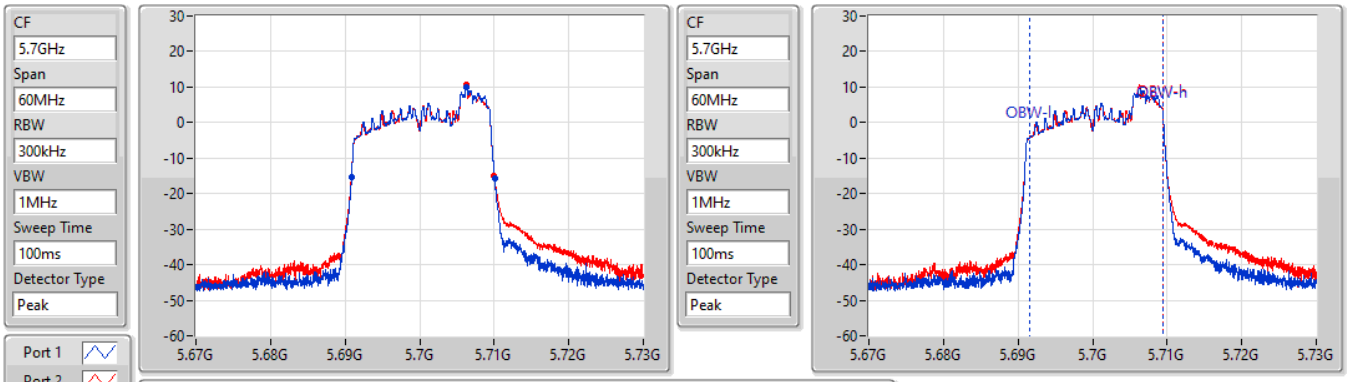


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.17M	5.69088G	5.71005G	17.811M	5.691634G	5.709445G	Inf	1
19.17M	5.690085G	5.71002G	17.841M	5.691604G	5.709445G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.47-5.725GHz

04/06/2022

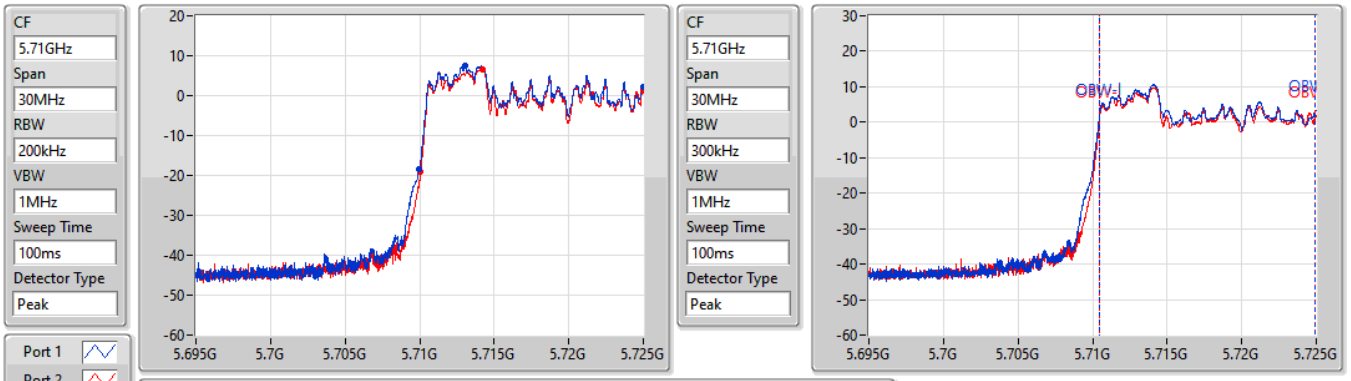


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
15.03M	5.70997G	5.725G	14.438M	5.710465G	5.724903G	Inf	1
14.925M	5.710075G	5.725G	14.408M	5.71048G	5.724888G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

04/06/2022

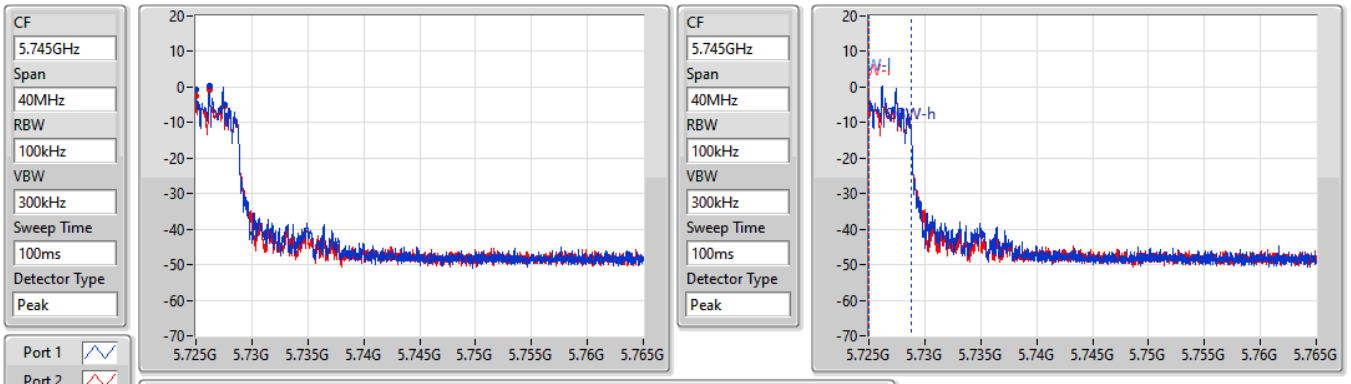


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.52M	5.725G	5.72752G	3.798M	5.72501G	5.728808G	500k	1
2.52M	5.725G	5.72752G	3.818M	5.72501G	5.728828G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz


04/06/2022

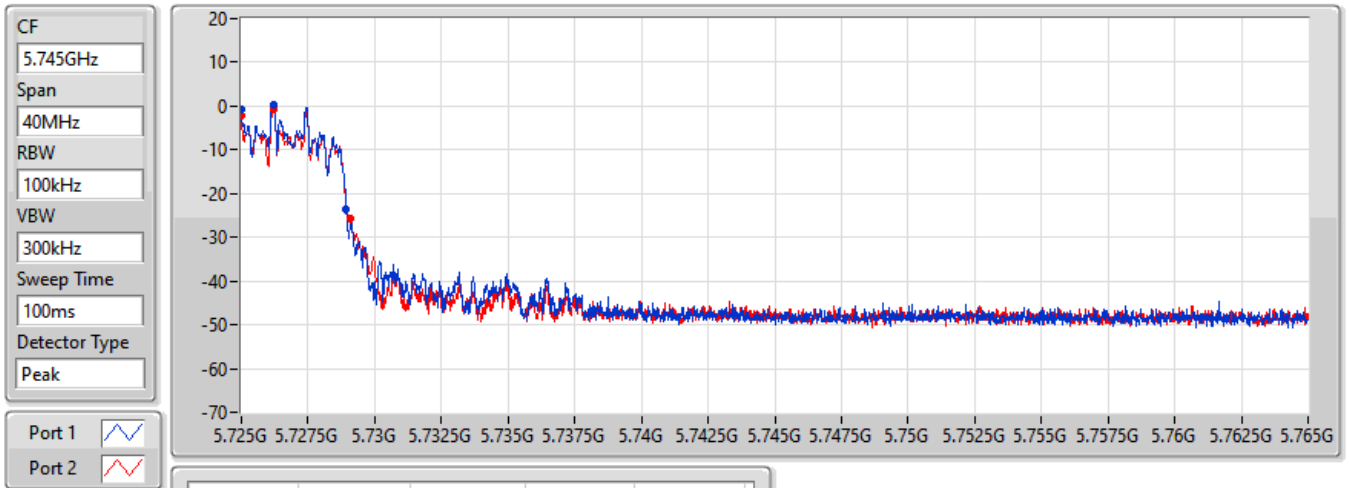

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
3.94M	5.725G	5.72894G	Inf	1
4.08M	5.725G	5.72908G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5745MHz

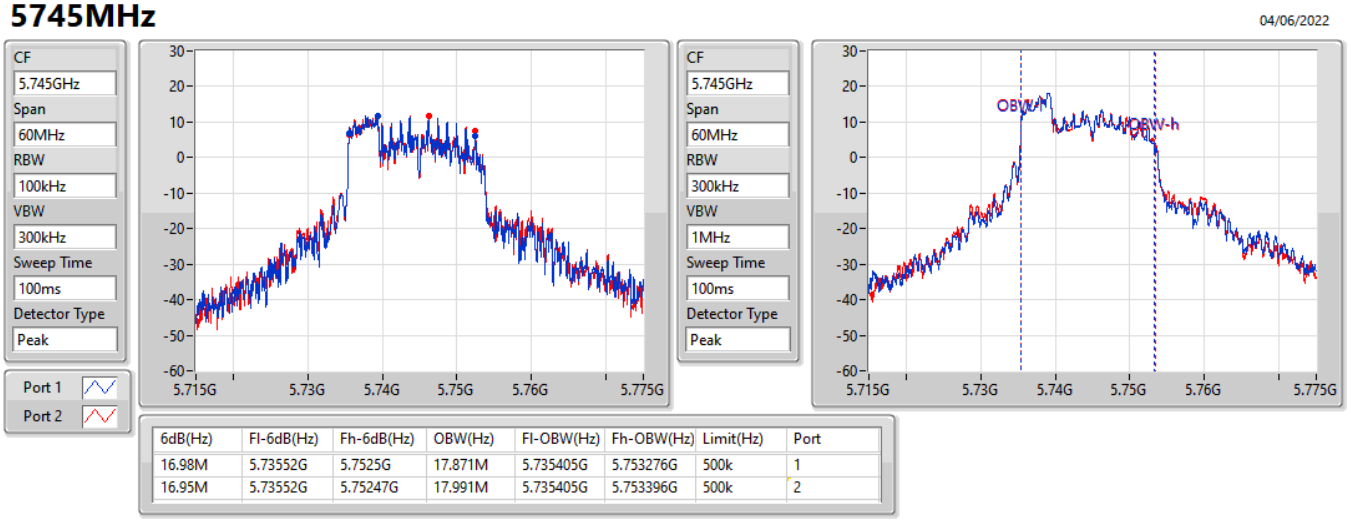

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.98M	5.73552G	5.7525G	17.871M	5.735405G	5.753276G	500k	1
16.95M	5.73552G	5.75247G	17.991M	5.735405G	5.753396G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5745MHz

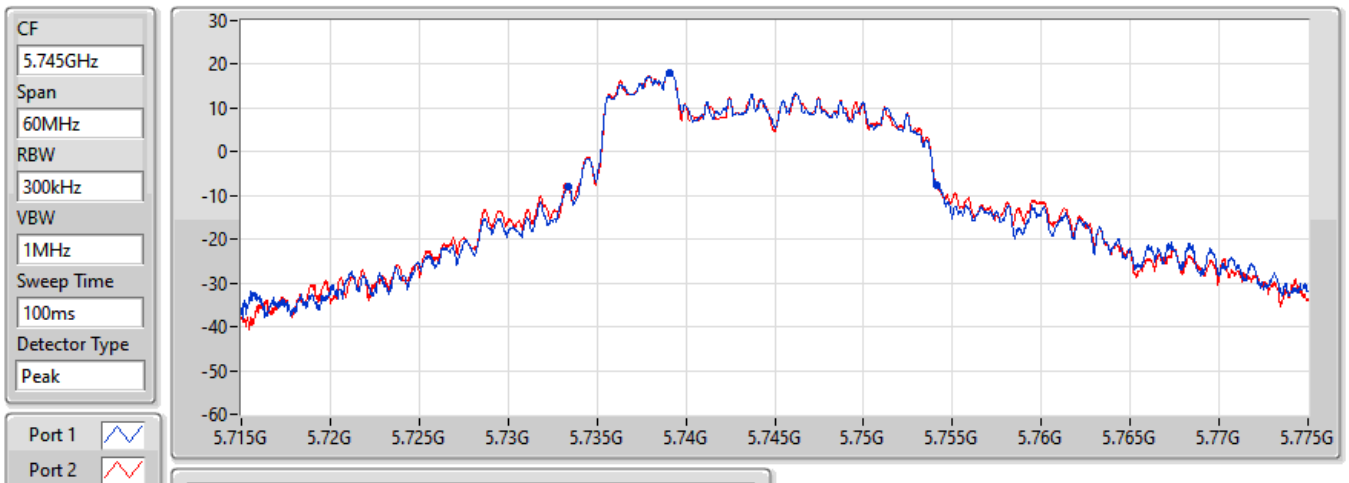


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
20.79M	5.73336G	5.75415G	Inf	1
20.88M	5.73327G	5.75415G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz

04/06/2022

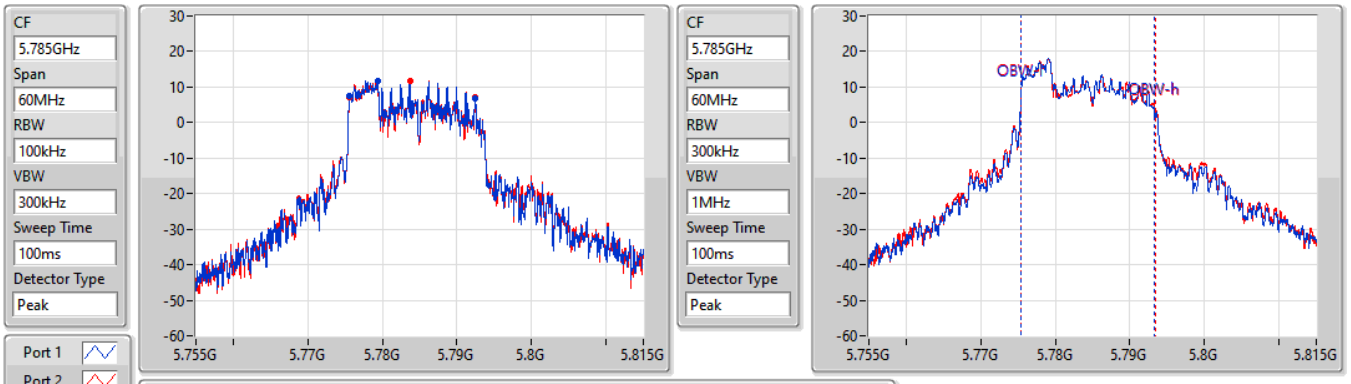


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.98M	5.77552G	5.7925G	17.871M	5.775405G	5.793276G	500k	1
16.98M	5.77552G	5.7925G	18.021M	5.775405G	5.793426G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz


04/06/2022

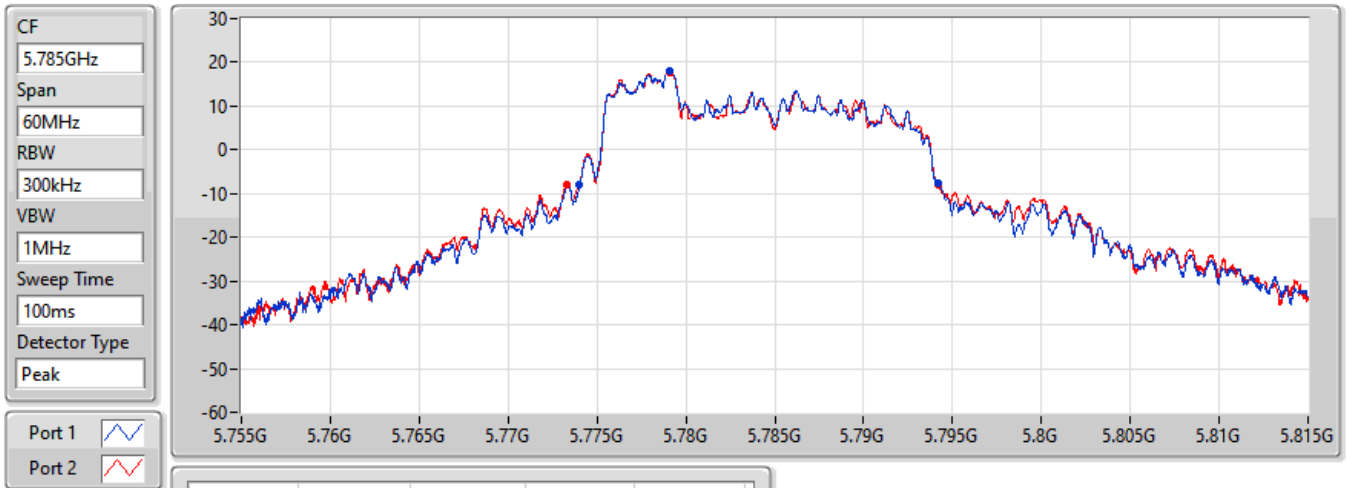

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
20.16M	5.77402G	5.79418G	Inf	1
20.88M	5.7733G	5.79418G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5825MHz

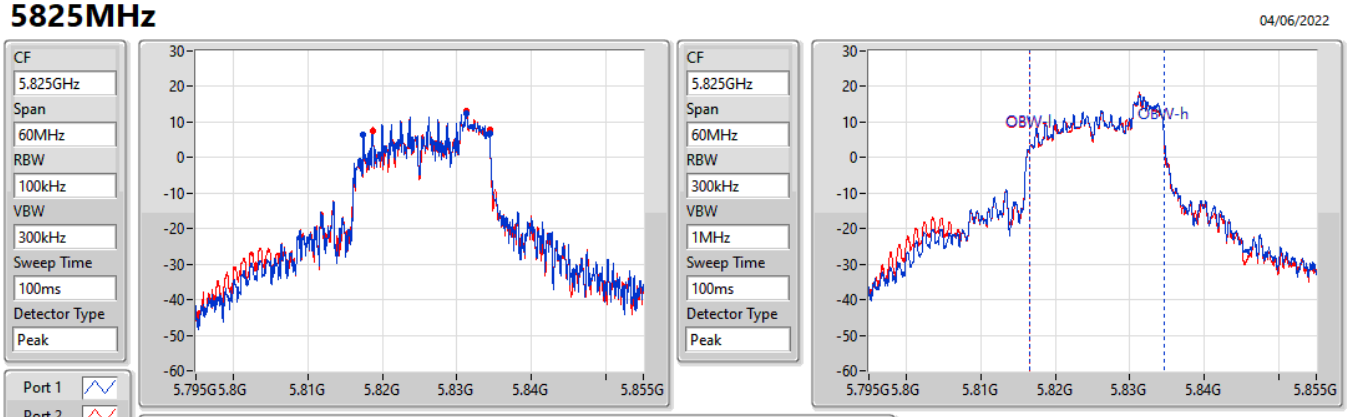

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.95M	5.81744G	5.83439G	17.991M	5.816604G	5.834595G	500k	1
15.69M	5.81867G	5.83436G	17.961M	5.816604G	5.834565G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz

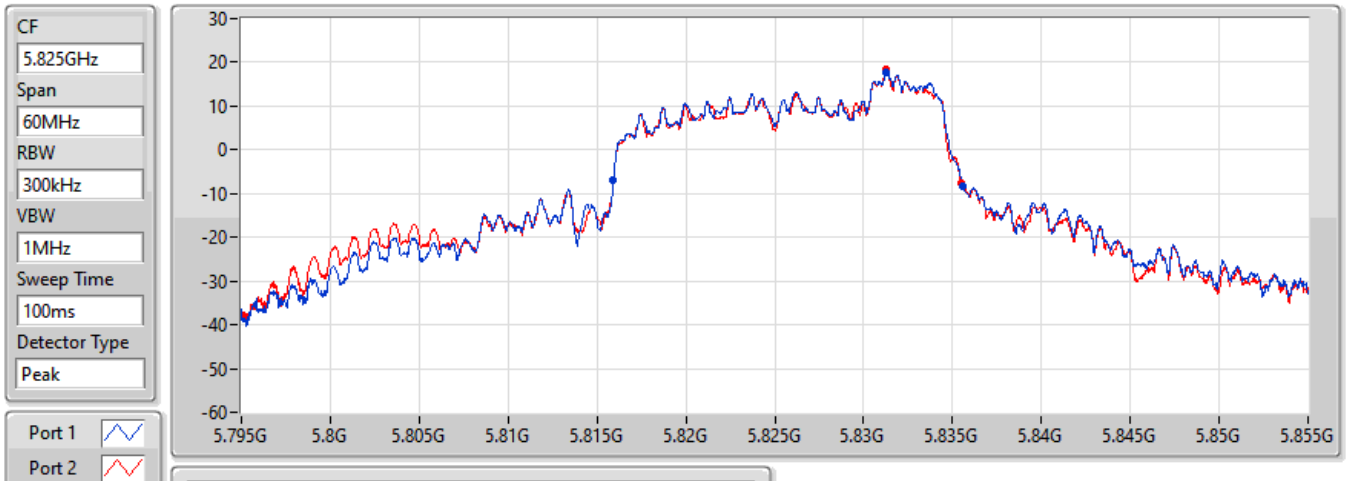

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
19.65M	5.81591G	5.83556G	Inf	1
19.56M	5.81591G	5.83547G	Inf	2

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.15-5.25GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.05M	17.721M	17M7D1D	18.96M	17.601M
5.25-5.35GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.17M	17.751M	17M8D1D	19.02M	17.691M
5.47-5.725GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	19.14M	17.751M	17M8D1D	14.82M	14.348M
5.725-5.85GHz	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	16.95M	18.261M	18M3D1D	2.52M	3.798M

Max-N dB = Maximum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth for 5.725-5.85GHz band / Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	Inf	19.05M	17.631M	19.05M	17.721M
5200MHz	Pass	Inf	19.02M	17.601M	19.05M	17.691M
5240MHz	Pass	Inf	19.02M	17.631M	18.96M	17.661M
5260MHz	Pass	Inf	19.14M	17.691M	19.17M	17.721M
5300MHz	Pass	Inf	19.11M	17.691M	19.05M	17.691M
5320MHz	Pass	Inf	19.11M	17.691M	19.02M	17.751M
5500MHz	Pass	Inf	19.05M	17.631M	18.93M	17.601M
5580MHz	Pass	Inf	19.02M	17.631M	19.08M	17.721M
5700MHz	Pass	Inf	19.14M	17.691M	18.96M	17.751M
5720MHz Straddle 5.47-5.725GHz	Pass	Inf	14.865M	14.393M	14.82M	14.348M
5720MHz Straddle 5.725-5.85GHz	Pass	500k	2.52M	3.798M	2.52M	3.818M
5745MHz	Pass	500k	16.95M	17.871M	16.95M	18.081M
5785MHz	Pass	500k	16.95M	17.991M	16.95M	18.261M
5825MHz	Pass	500k	16.92M	18.141M	15.09M	17.991M

Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5180MHz

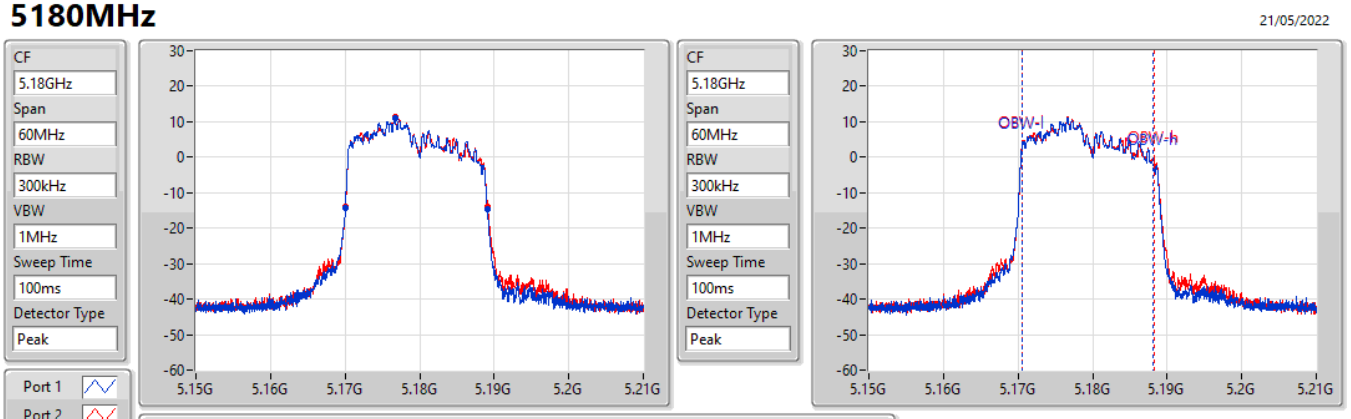

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.05M	5.17004G	5.18909G	17.631M	5.170525G	5.188156G	Inf	1
19.05M	5.17007G	5.18912G	17.721M	5.170525G	5.188246G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5200MHz

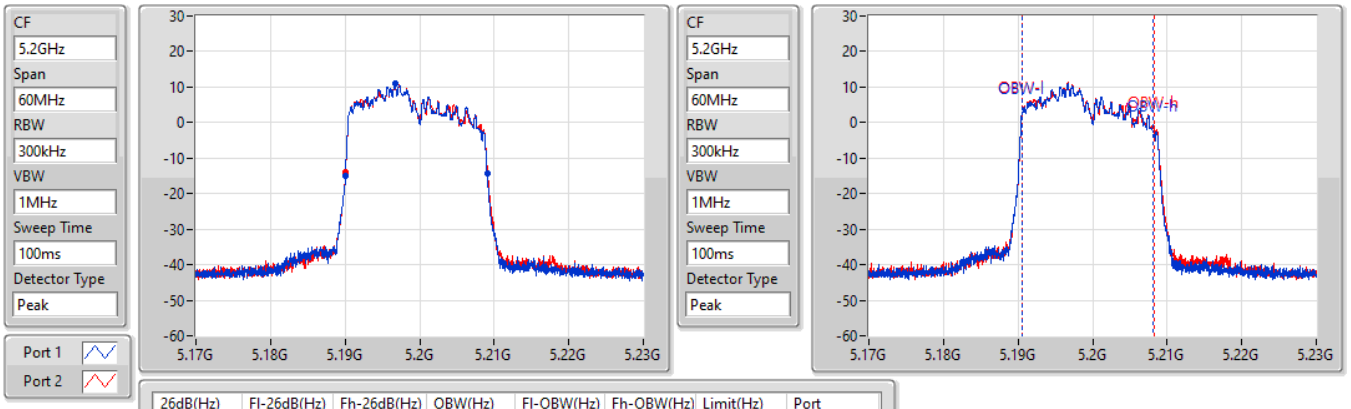

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.02M	5.19004G	5.20906G	17.601M	5.190555G	5.208156G	Inf	1
19.05M	5.19007G	5.20912G	17.691M	5.190555G	5.208246G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5240MHz

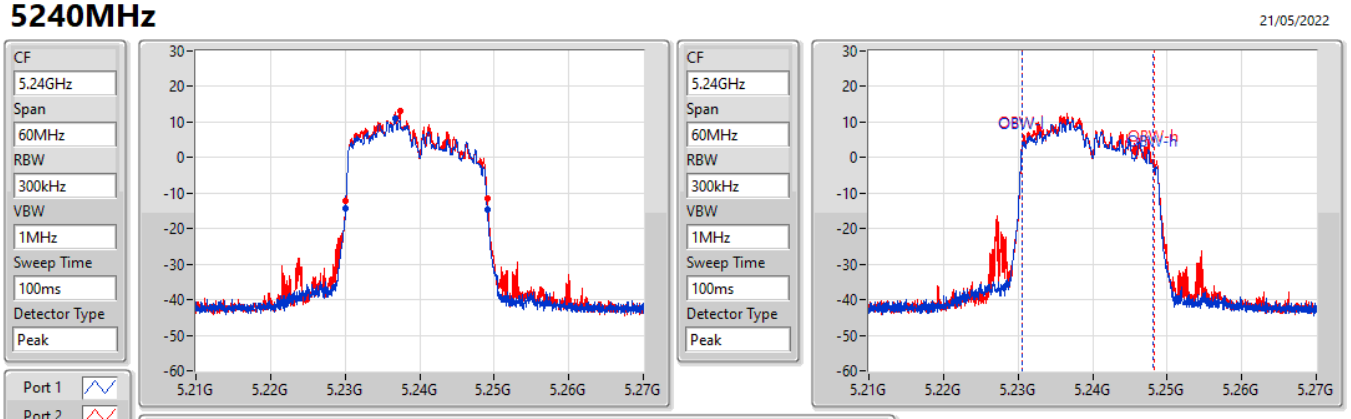

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.02M	5.23007G	5.24909G	17.631M	5.230555G	5.248186G	Inf	1
18.96M	5.23013G	5.24909G	17.661M	5.230555G	5.248216G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5260MHz

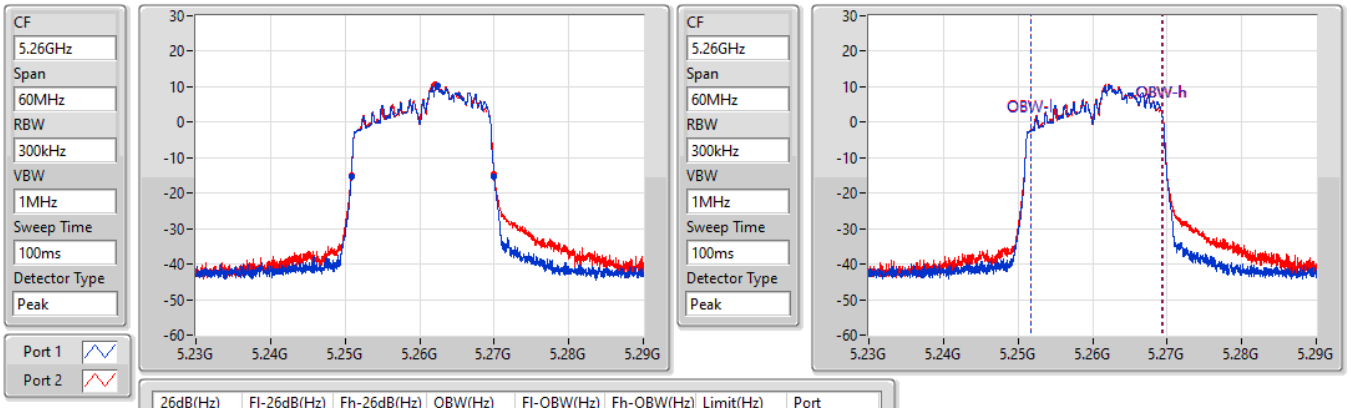

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.14M	5.25085G	5.26999G	17.691M	5.251664G	5.269355G	Inf	1
19.17M	5.25082G	5.26999G	17.721M	5.251664G	5.269385G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5300MHz

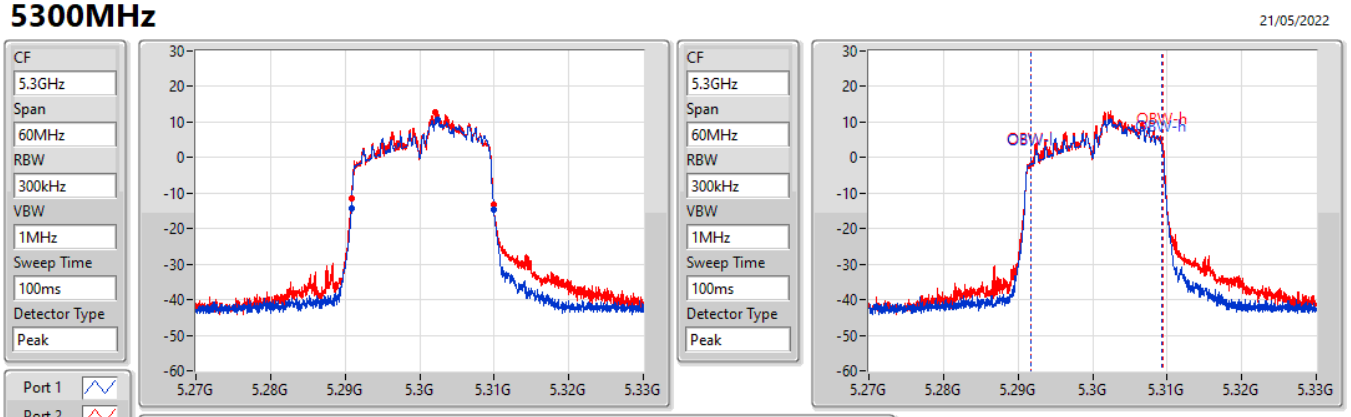

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.29085G	5.30996G	17.691M	5.291664G	5.309355G	Inf	1
19.05M	5.29085G	5.3099G	17.691M	5.291724G	5.309415G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5320MHz

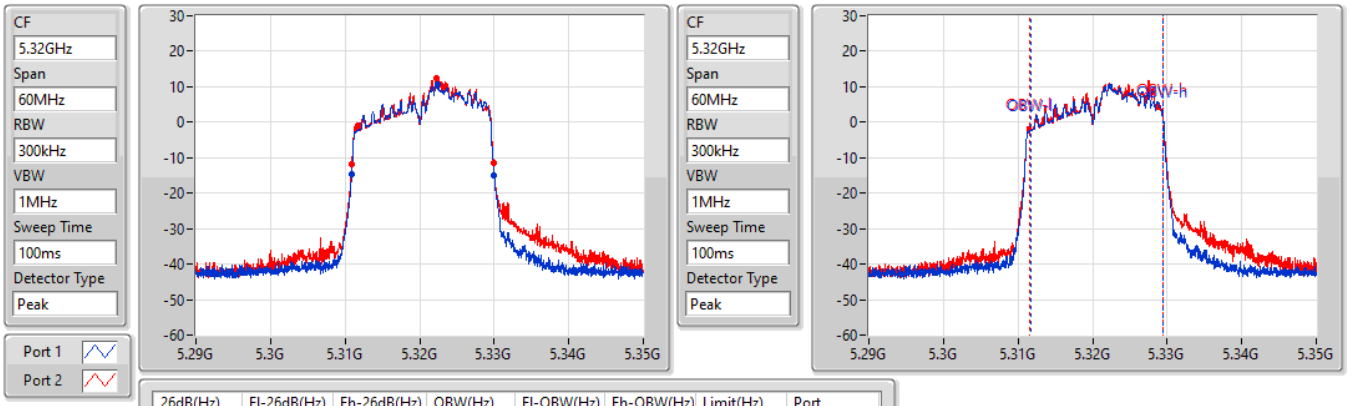

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.11M	5.31088G	5.32999G	17.691M	5.311694G	5.329385G	Inf	1
19.02M	5.31091G	5.32993G	17.751M	5.311634G	5.329385G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5500MHz

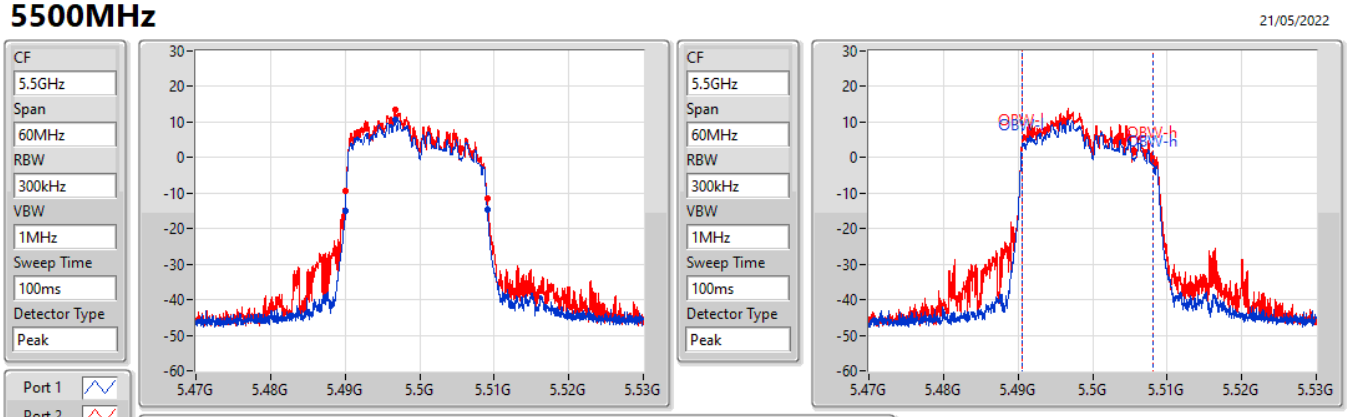

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.05M	5.49004G	5.50909G	17.631M	5.490555G	5.508186G	Inf	1
18.93M	5.4901G	5.50903G	17.601M	5.490585G	5.508186G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5580MHz

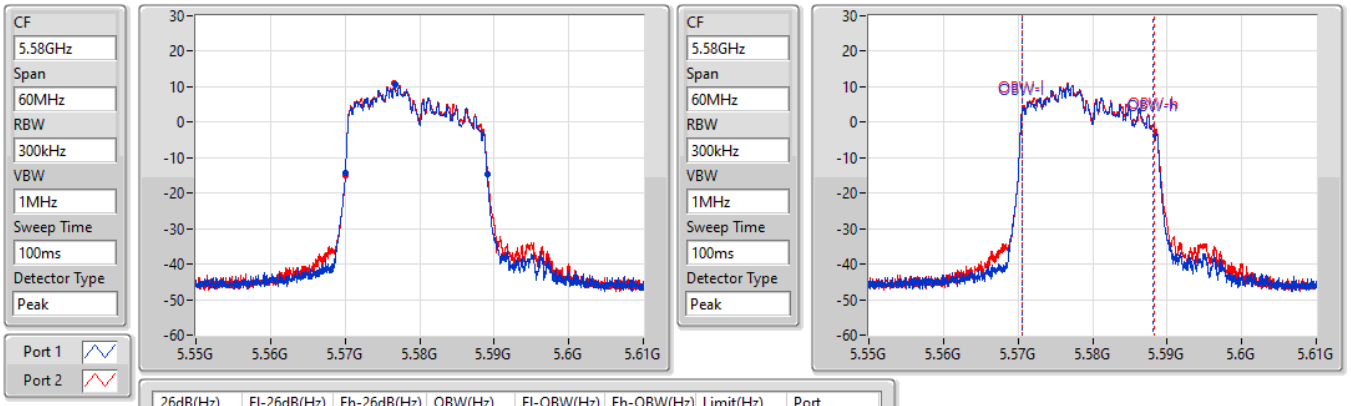


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.02M	5.57004G	5.58906G	17.631M	5.570525G	5.588156G	Inf	1
19.08M	5.57004G	5.58912G	17.721M	5.570525G	5.588246G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5700MHz

21/05/2022

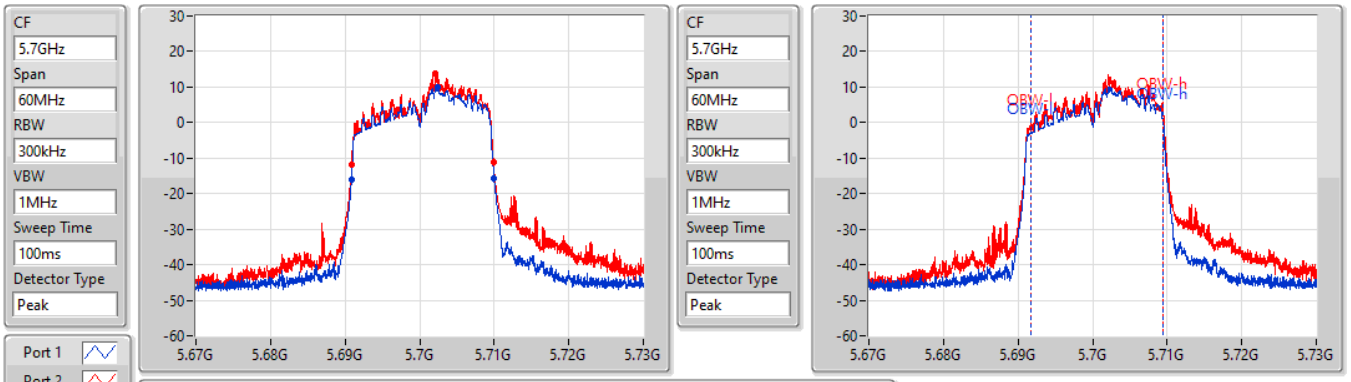


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
19.14M	5.69085G	5.70999G	17.691M	5.691694G	5.709385G	Inf	1
18.96M	5.69094G	5.7099G	17.751M	5.691694G	5.709445G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.47-5.725GHz

04/06/2022

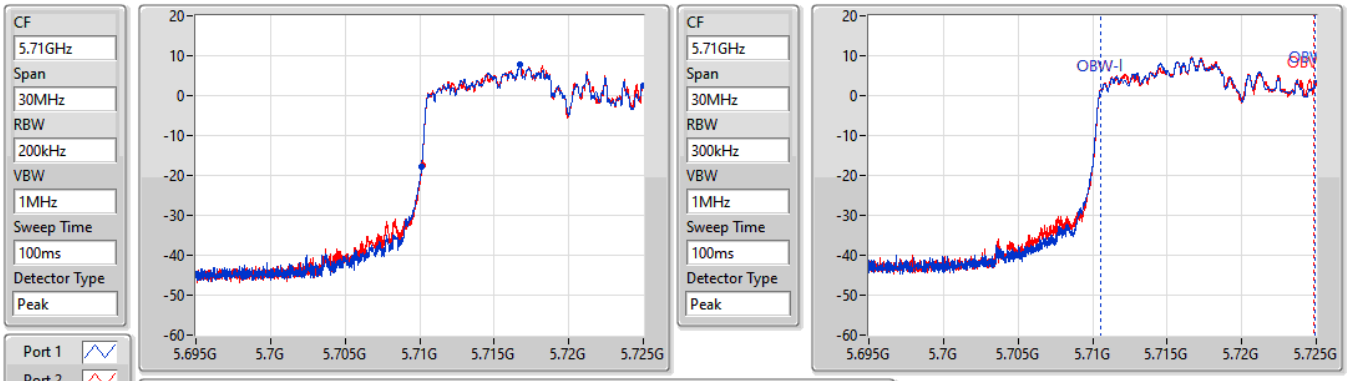


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
14.865M	5.710135G	5.725G	14.393M	5.71051G	5.724903G	Inf	1
14.82M	5.71018G	5.725G	14.348M	5.710525G	5.724873G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

04/06/2022

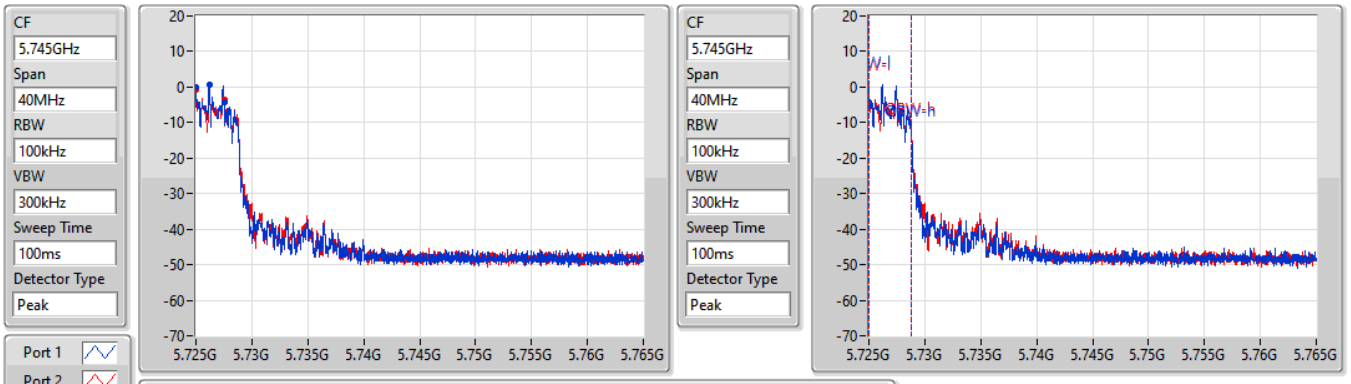


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
2.52M	5.725G	5.72752G	3.798M	5.72501G	5.728808G	500k	1
2.52M	5.725G	5.72752G	3.818M	5.72501G	5.728828G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5720MHz Straddle 5.725-5.85GHz

04/06/2022

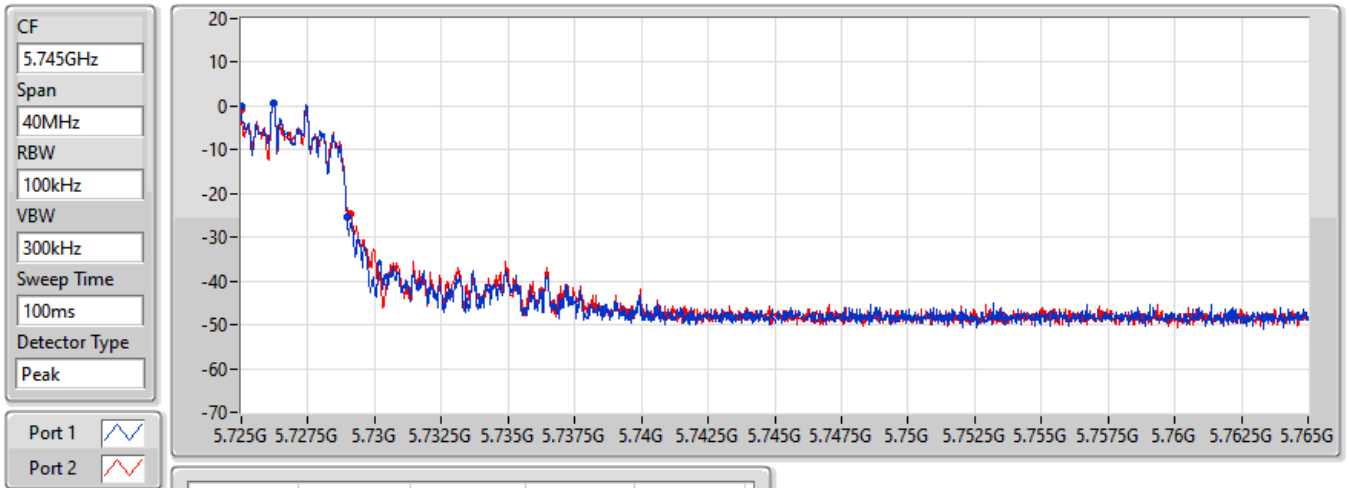


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
3.96M	5.725G	5.72896G	Inf	1
4.1M	5.725G	5.7291G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

5745MHz

04/06/2022

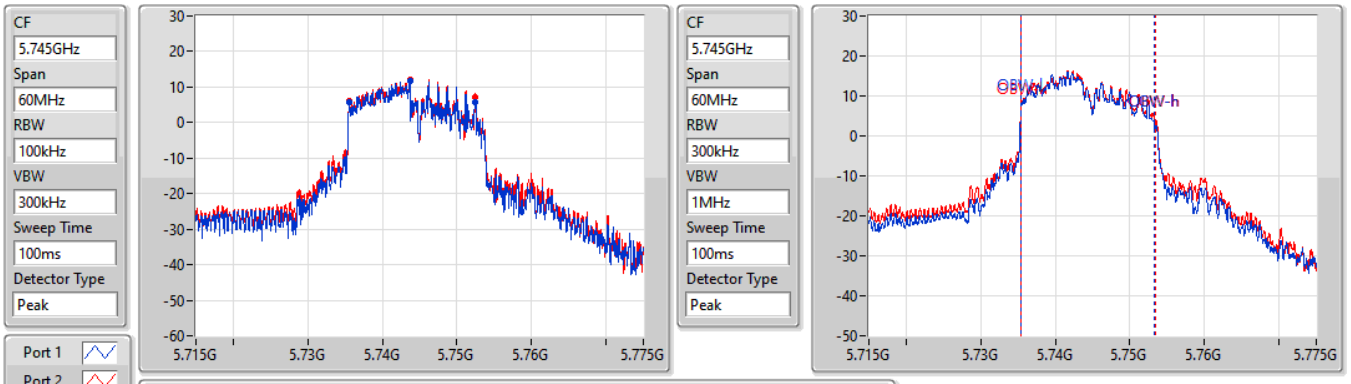


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.95M	5.73555G	5.7525G	17.871M	5.735405G	5.753276G	500k	1
16.95M	5.73555G	5.7525G	18.081M	5.7353345G	5.753426G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

5745MHz

04/06/2022

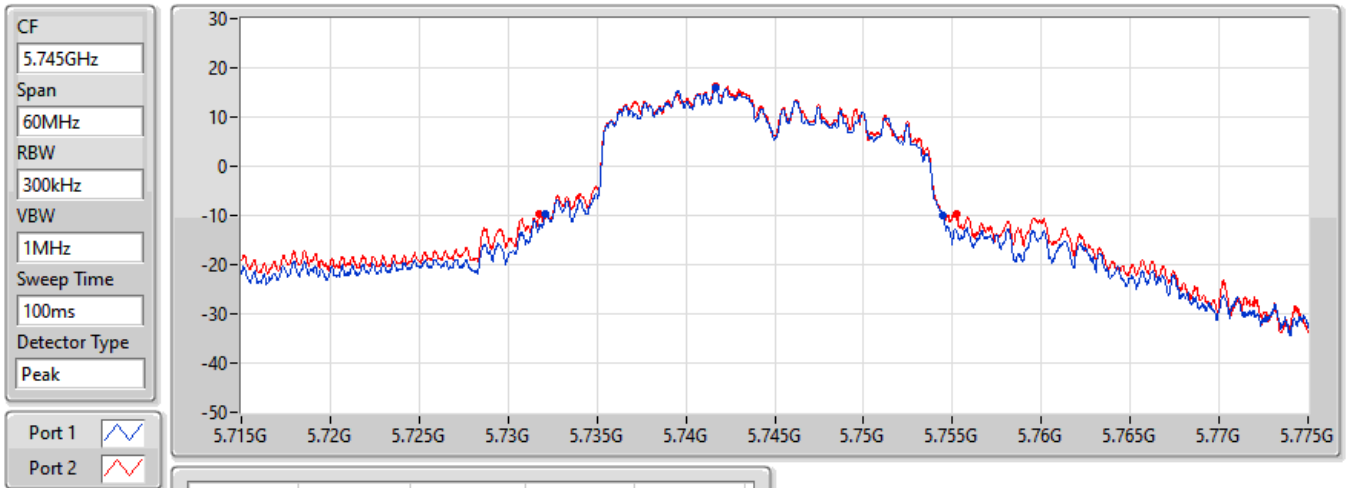


26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
22.32M	5.7321G	5.75442G	Inf	1
23.43M	5.73177G	5.7552G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz

04/06/2022

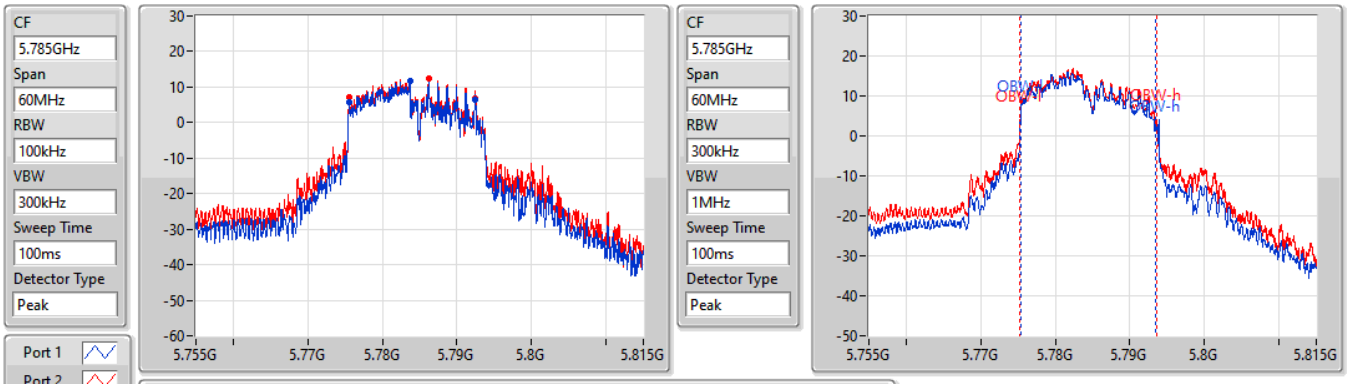


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.95M	5.77555G	5.7925G	17.991M	5.775405G	5.793396G	500k	1
16.95M	5.77555G	5.7925G	18.261M	5.775285G	5.7935546G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5785MHz


04/06/2022

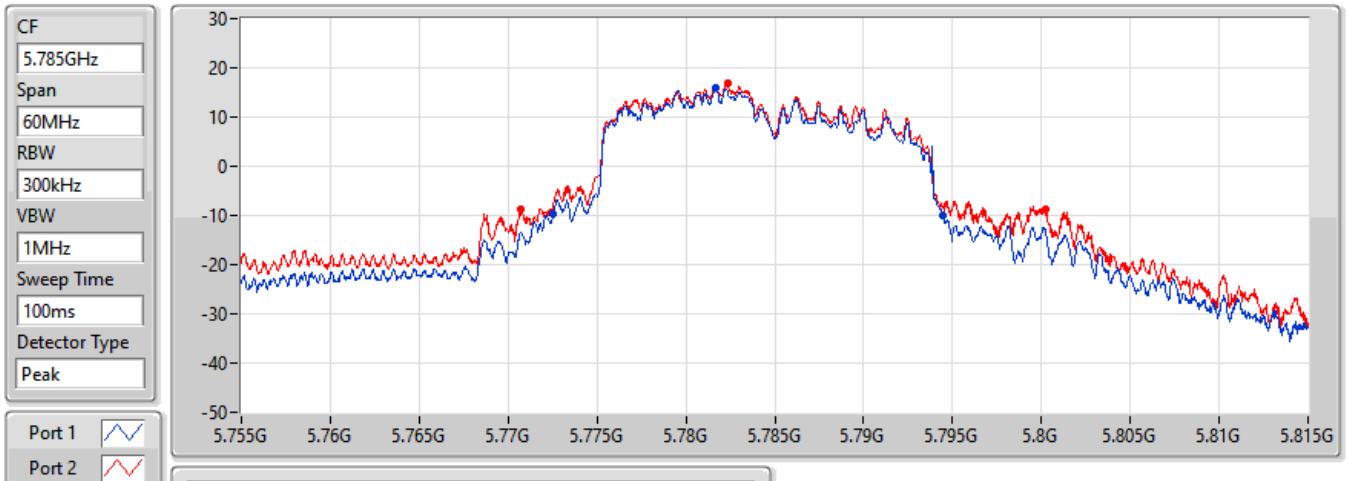

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
21.93M	5.77255G	5.79448G	Inf	1
29.49M	5.77072G	5.80021G	Inf	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW


5825MHz

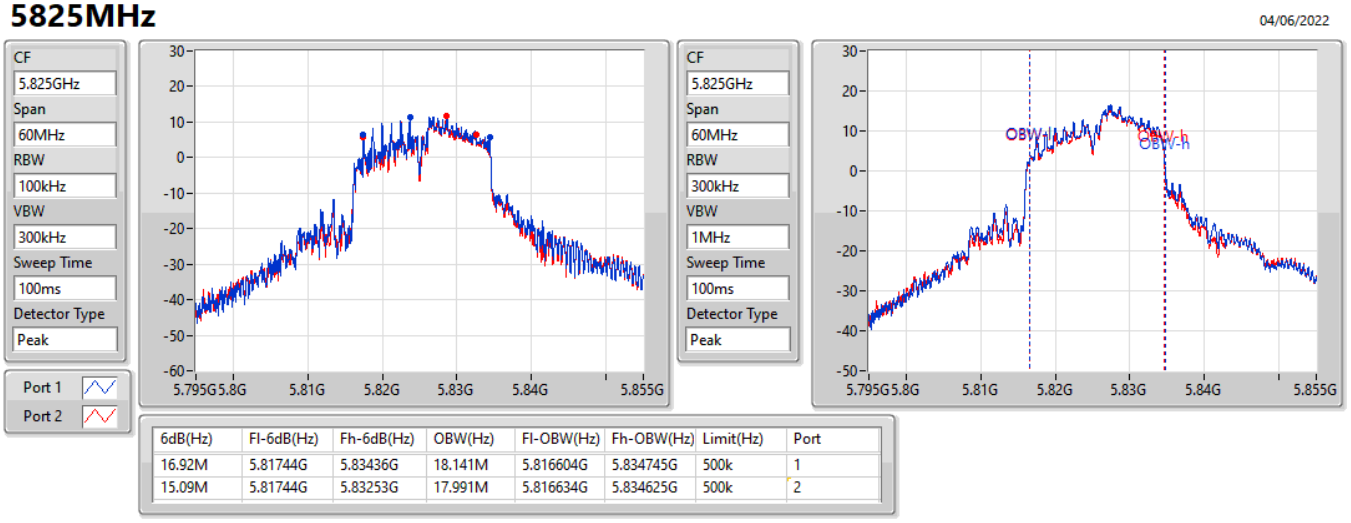

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
16.92M	5.81744G	5.83436G	18.141M	5.816604G	5.834745G	500k	1
15.09M	5.81744G	5.83253G	17.991M	5.816634G	5.834625G	500k	2

802.11ax HEW20_Nss1,(MCS0)_2TX EBW

5825MHz

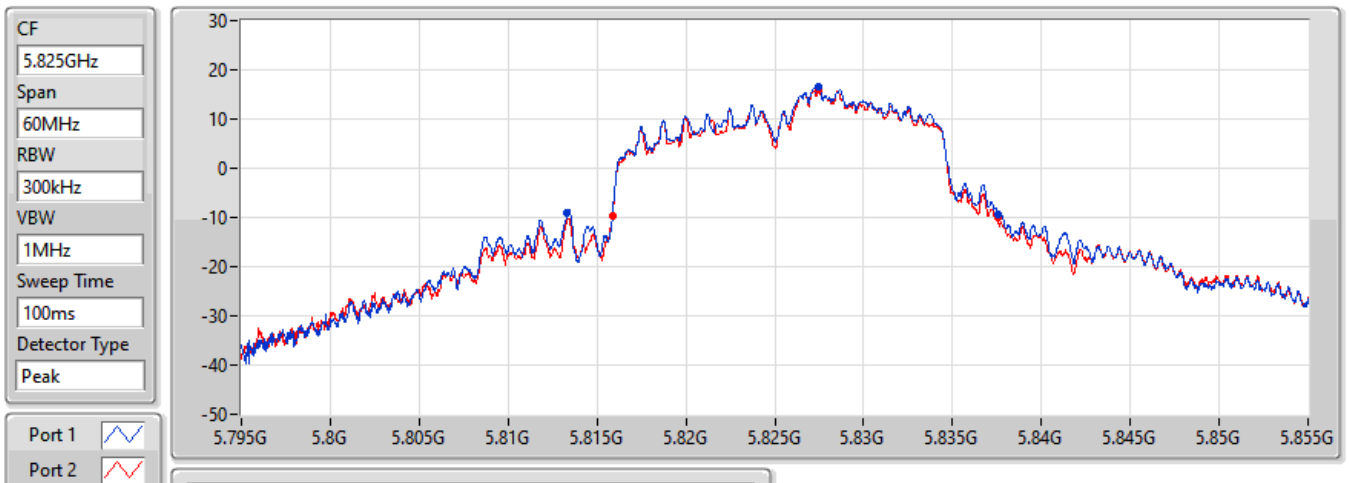

26dB(Hz)	Fl-26dB(Hz)	Fh-26dB(Hz)	Limit(Hz)	Port
24.24M	5.81333G	5.83757G	Inf	1
21.66M	5.81588G	5.83754G	Inf	2

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	21.58	0.14388	26.58	0.45499
802.11ac VHT20_Nss1,(MCS0)_1TX	21.78	0.15066	26.78	0.47643
802.11ac VHT40_Nss1,(MCS0)_1TX	20.87	0.12218	25.87	0.38637
802.11ac VHT80_Nss1,(MCS0)_1TX	15.82	0.03819	20.82	0.12078
802.11ac VHT160_Nss1,(MCS0)_1TX	8.28	0.00673	13.28	0.02128
802.11ax HEW20_Nss1,(MCS0)_1TX	21.81	0.15171	26.81	0.47973
802.11ax HEW40_Nss1,(MCS0)_1TX	20.91	0.12331	25.91	0.38994
802.11ax HEW80_Nss1,(MCS0)_1TX	15.84	0.03837	20.84	0.12134
802.11ax HEW160_Nss1,(MCS0)_1TX	8.37	0.00687	13.37	0.02173
5.25-5.35GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	21.63	0.14555	26.63	0.46026
802.11ac VHT20_Nss1,(MCS0)_1TX	21.43	0.13900	26.43	0.43954
802.11ac VHT40_Nss1,(MCS0)_1TX	20.14	0.10328	25.14	0.32659
802.11ac VHT80_Nss1,(MCS0)_1TX	14.11	0.02576	19.11	0.08147
802.11ac VHT160_Nss1,(MCS0)_1TX	8.46	0.00701	13.46	0.02218
802.11ax HEW20_Nss1,(MCS0)_1TX	21.47	0.14028	26.47	0.44361
802.11ax HEW40_Nss1,(MCS0)_1TX	20.17	0.10399	25.17	0.32885
802.11ax HEW80_Nss1,(MCS0)_1TX	14.16	0.02606	19.16	0.08241
802.11ax HEW160_Nss1,(MCS0)_1TX	8.53	0.00713	13.53	0.02254
5.47-5.725GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	21.71	0.14825	26.71	0.46881
802.11ac VHT20_Nss1,(MCS0)_1TX	21.67	0.14689	26.67	0.46452
802.11ac VHT40_Nss1,(MCS0)_1TX	21.28	0.13428	26.28	0.42462
802.11ac VHT80_Nss1,(MCS0)_1TX	20.34	0.10814	25.34	0.34198
802.11ac VHT160_Nss1,(MCS0)_1TX	12.13	0.01633	17.13	0.05164
802.11ax HEW20_Nss1,(MCS0)_1TX	21.75	0.14962	26.75	0.47315
802.11ax HEW40_Nss1,(MCS0)_1TX	21.45	0.13964	26.45	0.44157
802.11ax HEW80_Nss1,(MCS0)_1TX	20.35	0.10839	25.35	0.34277
802.11ax HEW160_Nss1,(MCS0)_1TX	12.21	0.01663	17.21	0.05260
5.725-5.85GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_1TX	22.28	0.16904	27.28	0.53456
802.11ac VHT20_Nss1,(MCS0)_1TX	22.38	0.17298	27.38	0.54702
802.11ac VHT40_Nss1,(MCS0)_1TX	21.35	0.13646	26.35	0.43152
802.11ac VHT80_Nss1,(MCS0)_1TX	18.15	0.06531	23.15	0.20654
802.11ax HEW20_Nss1,(MCS0)_1TX	22.43	0.17498	27.43	0.55335
802.11ax HEW40_Nss1,(MCS0)_1TX	21.47	0.14028	26.47	0.44361
802.11ax HEW80_Nss1,(MCS0)_1TX	18.17	0.06561	23.17	0.20749

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-	-
5180MHz	Pass	5.00	20.46	20.46	30.00	25.46
5200MHz	Pass	5.00	21.58	21.58	30.00	26.58
5240MHz	Pass	5.00	21.53	21.53	30.00	26.53
5260MHz	Pass	5.00	21.45	21.45	23.98	26.45
5300MHz	Pass	5.00	21.63	21.63	23.98	26.63
5320MHz	Pass	5.00	18.75	18.75	23.98	23.75
5500MHz	Pass	5.00	19.63	19.63	23.98	24.63
5580MHz	Pass	5.00	21.71	21.71	23.98	26.71
5700MHz	Pass	5.00	16.26	16.26	23.98	21.26
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	21.69	21.69	23.98	26.69
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	13.5	13.50	30.00	18.50
5745MHz	Pass	5.00	22.24	22.24	30.00	27.24
5785MHz	Pass	5.00	22.18	22.18	30.00	27.18
5825MHz	Pass	5.00	22.28	22.28	30.00	27.28
802.11ac VHT20_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5180MHz	Pass	5.00	18.69	18.69	30.00	23.69
5200MHz	Pass	5.00	21.78	21.78	30.00	26.78
5240MHz	Pass	5.00	21.42	21.42	30.00	26.42
5260MHz	Pass	5.00	21.43	21.43	23.98	26.43
5300MHz	Pass	5.00	21.39	21.39	23.98	26.39
5320MHz	Pass	5.00	18.09	18.09	23.98	23.09
5500MHz	Pass	5.00	18.93	18.93	23.98	23.93
5580MHz	Pass	5.00	21.62	21.62	23.98	26.62
5700MHz	Pass	5.00	15.68	15.68	23.98	20.68
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	21.67	21.67	23.98	26.67
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	14.08	14.08	30.00	19.08
5745MHz	Pass	5.00	22.25	22.25	30.00	27.25
5785MHz	Pass	5.00	22.21	22.21	30.00	27.21
5825MHz	Pass	5.00	22.38	22.38	30.00	27.38
802.11ac VHT40_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5190MHz	Pass	5.00	17.23	17.23	30.00	22.23
5230MHz	Pass	5.00	20.87	20.87	30.00	25.87
5270MHz	Pass	5.00	20.14	20.14	23.98	25.14
5310MHz	Pass	5.00	16.53	16.53	23.98	21.53
5510MHz	Pass	5.00	17.63	17.63	23.98	22.63
5550MHz	Pass	5.00	19.65	19.65	23.98	24.65
5670MHz	Pass	5.00	17.13	17.13	23.98	22.13
5710MHz Straddle 5.47-5.725GHz	Pass	5.00	21.28	21.28	23.98	26.28
5710MHz Straddle 5.725-5.85GHz	Pass	5.00	8.48	8.48	30.00	13.48
5755MHz	Pass	5.00	20.91	20.91	30.00	25.91
5795MHz	Pass	5.00	21.35	21.35	30.00	26.35
802.11ac VHT80_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5210MHz	Pass	5.00	15.82	15.82	30.00	20.82
5290MHz	Pass	5.00	14.11	14.11	23.98	19.11
5530MHz	Pass	5.00	16.42	16.42	23.98	21.42
5610MHz	Pass	5.00	17.03	17.03	23.98	22.03
5690MHz Straddle 5.47-5.725GHz	Pass	5.00	20.34	20.34	23.98	25.34
5690MHz Straddle 5.725-5.85GHz	Pass	5.00	3.9	3.90	30.00	8.90
5775MHz	Pass	5.00	18.15	18.15	30.00	23.15
802.11ac VHT160_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	5.00	8.28	8.28	30.00	13.28
5250MHz Straddle 5.25-5.35GHz	Pass	5.00	8.46	8.46	23.98	13.46
5570MHz	Pass	5.00	12.13	12.13	23.98	17.13
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-	-


Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)
5180MHz	Pass	5.00	18.79	18.79	30.00	23.79
5200MHz	Pass	5.00	21.81	21.81	30.00	26.81
5240MHz	Pass	5.00	21.46	21.46	30.00	26.46
5260MHz	Pass	5.00	21.47	21.47	23.98	26.47
5300MHz	Pass	5.00	21.42	21.42	23.98	26.42
5320MHz	Pass	5.00	18.28	18.28	23.98	23.28
5500MHz	Pass	5.00	18.97	18.97	23.98	23.97
5580MHz	Pass	5.00	21.65	21.65	23.98	26.65
5700MHz	Pass	5.00	15.74	15.74	23.98	20.74
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	21.75	21.75	23.98	26.75
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	14.3	14.30	30.00	19.30
5745MHz	Pass	5.00	22.29	22.29	30.00	27.29
5785MHz	Pass	5.00	22.27	22.27	30.00	27.27
5825MHz	Pass	5.00	22.43	22.43	30.00	27.43
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5190MHz	Pass	5.00	17.41	17.41	30.00	22.41
5230MHz	Pass	5.00	20.91	20.91	30.00	25.91
5270MHz	Pass	5.00	20.17	20.17	23.98	25.17
5310MHz	Pass	5.00	16.61	16.61	23.98	21.61
5510MHz	Pass	5.00	17.67	17.67	23.98	22.67
5550MHz	Pass	5.00	19.68	19.68	23.98	24.68
5670MHz	Pass	5.00	17.17	17.17	23.98	22.17
5710MHz Straddle 5.47-5.725GHz	Pass	5.00	21.45	21.45	23.98	26.45
5710MHz Straddle 5.725-5.85GHz	Pass	5.00	8.87	8.87	30.00	13.87
5755MHz	Pass	5.00	20.93	20.93	30.00	25.93
5795MHz	Pass	5.00	21.47	21.47	30.00	26.47
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5210MHz	Pass	5.00	15.84	15.84	30.00	20.84
5290MHz	Pass	5.00	14.16	14.16	23.98	19.16
5530MHz	Pass	5.00	16.58	16.58	23.98	21.58
5610MHz	Pass	5.00	17.06	17.06	23.98	22.06
5690MHz Straddle 5.47-5.725GHz	Pass	5.00	20.35	20.35	23.98	25.35
5690MHz Straddle 5.725-5.85GHz	Pass	5.00	4.62	4.62	30.00	9.62
5775MHz	Pass	5.00	18.17	18.17	30.00	23.17
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	5.00	8.37	8.37	30.00	13.37
5250MHz Straddle 5.25-5.35GHz	Pass	5.00	8.53	8.53	23.98	13.53
5570MHz	Pass	5.00	12.21	12.21	23.98	17.21

DG = Directional Gain; Port X = Port X output power

802.11a_Nss1,(6Mbps)_1TX **AV Power**

5720MHz Straddle 5.47-5.725GHz_TnomVnom

19/05/2022

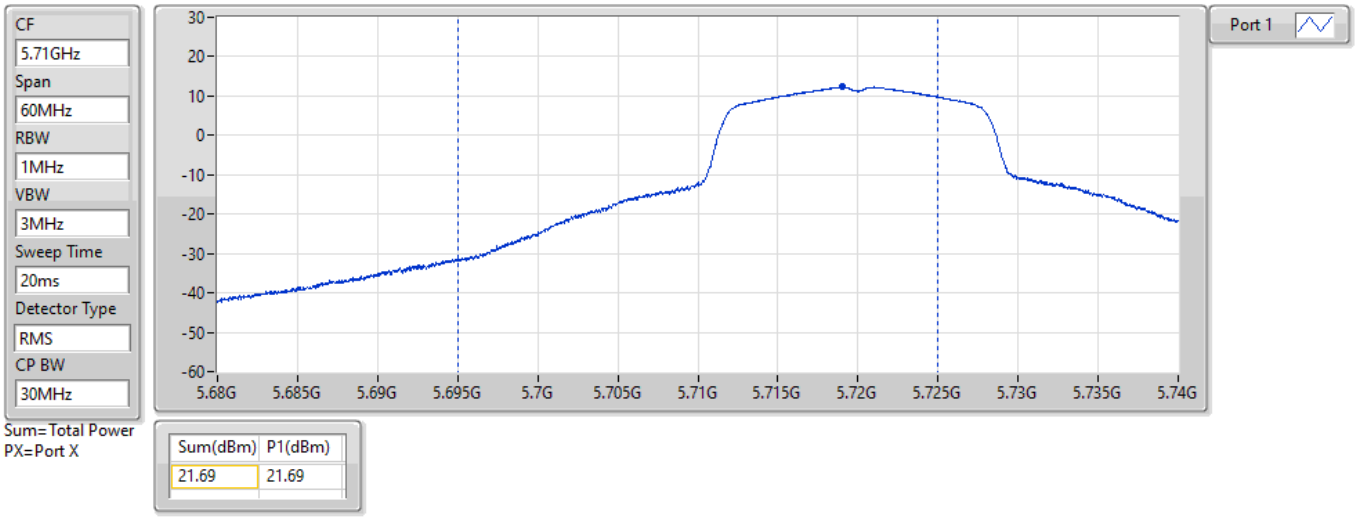


Sum(dBm)	P1(dBm)
21.69	21.69

802.11a_Nss1,(6Mbps)_1TX **AV Power**

5720MHz Straddle 5.725-5.85GHz_TnomVnom


19/05/2022

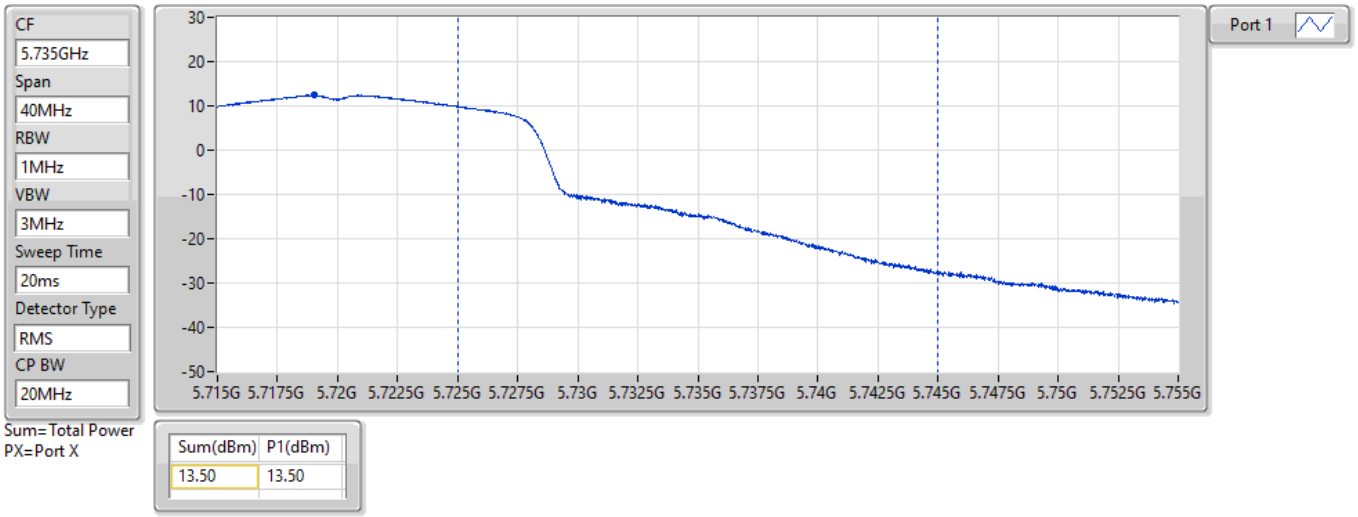

Sum(dBm)	P1(dBm)
13.50	13.50


802.11ac VHT20_Nss1,(MCS0)_1TX AV Power

5720MHz Straddle 5.47-5.725GHz_TnomVnom

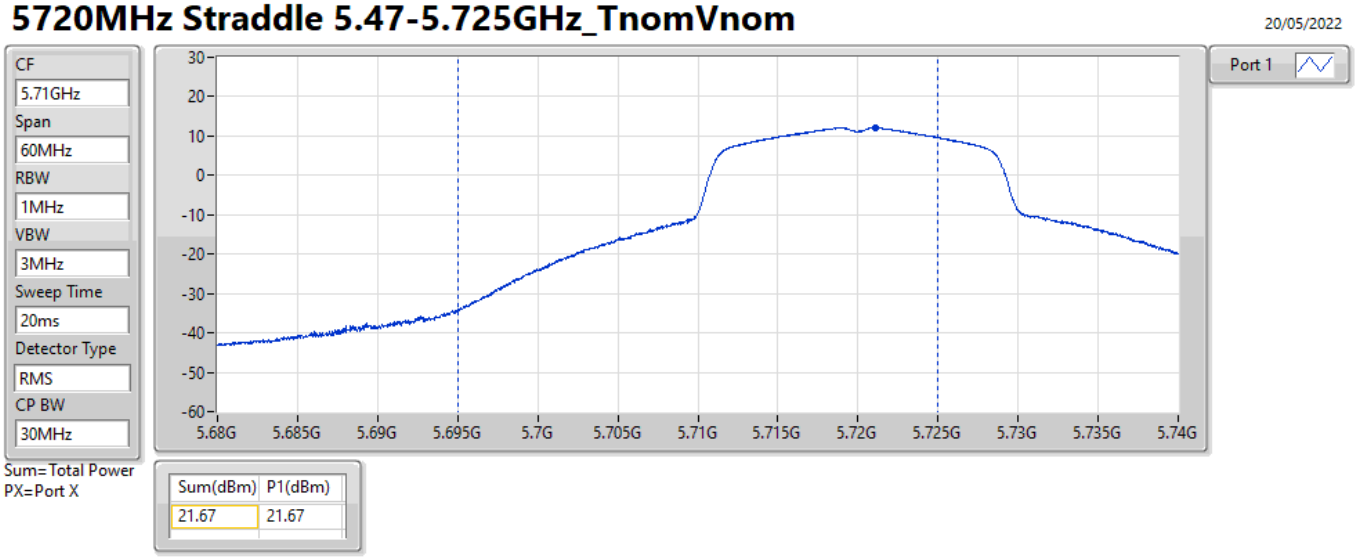

802.11ac VHT20_Nss1,(MCS0)_1TX AV Power


5720MHz Straddle 5.725-5.85GHz_TnomVnom

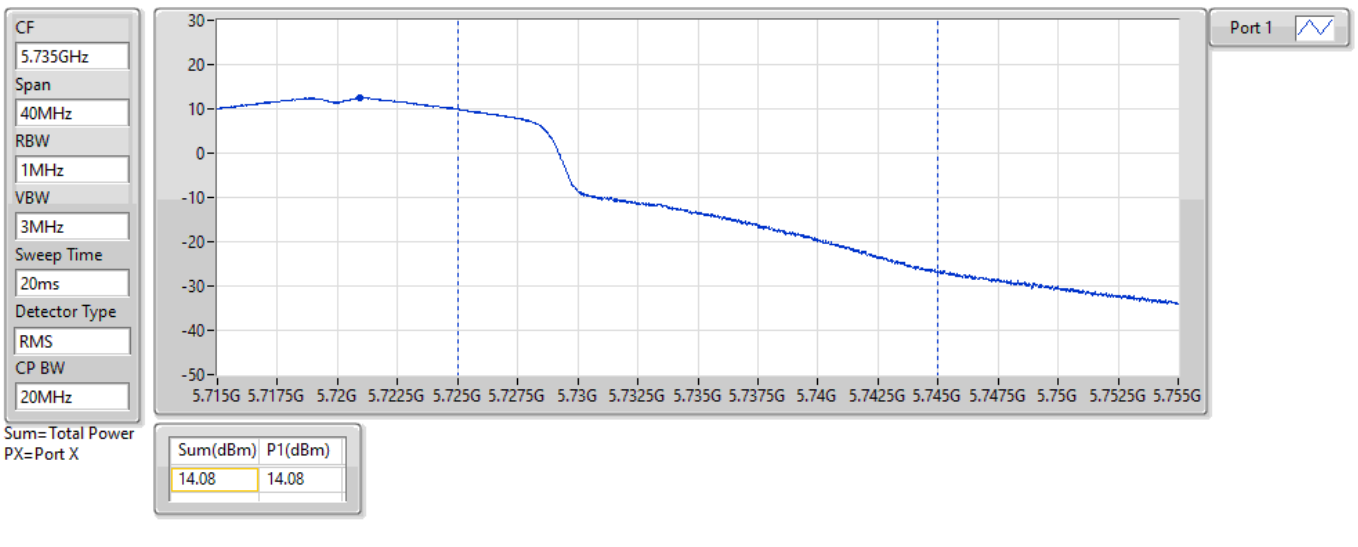

802.11ac VHT40_Nss1,(MCS0)_1TX **AV Power**

5710MHz Straddle 5.47-5.725GHz_TnomVnom


20/05/2022

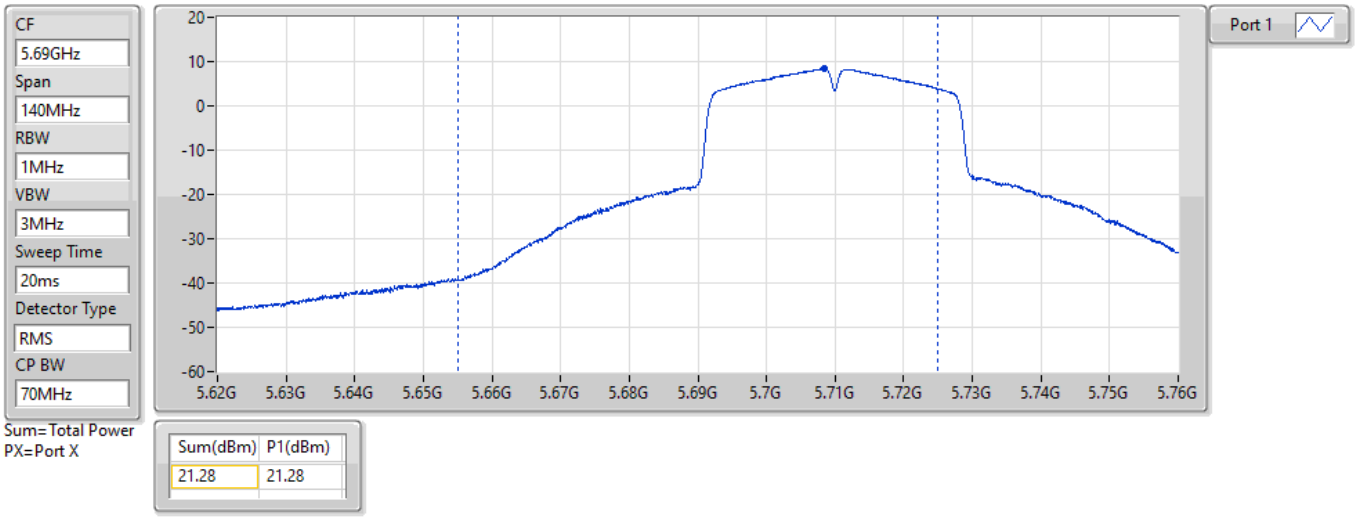

802.11ac VHT40_Nss1,(MCS0)_1TX **AV Power**

5710MHz Straddle 5.725-5.85GHz_TnomVnom


20/05/2022

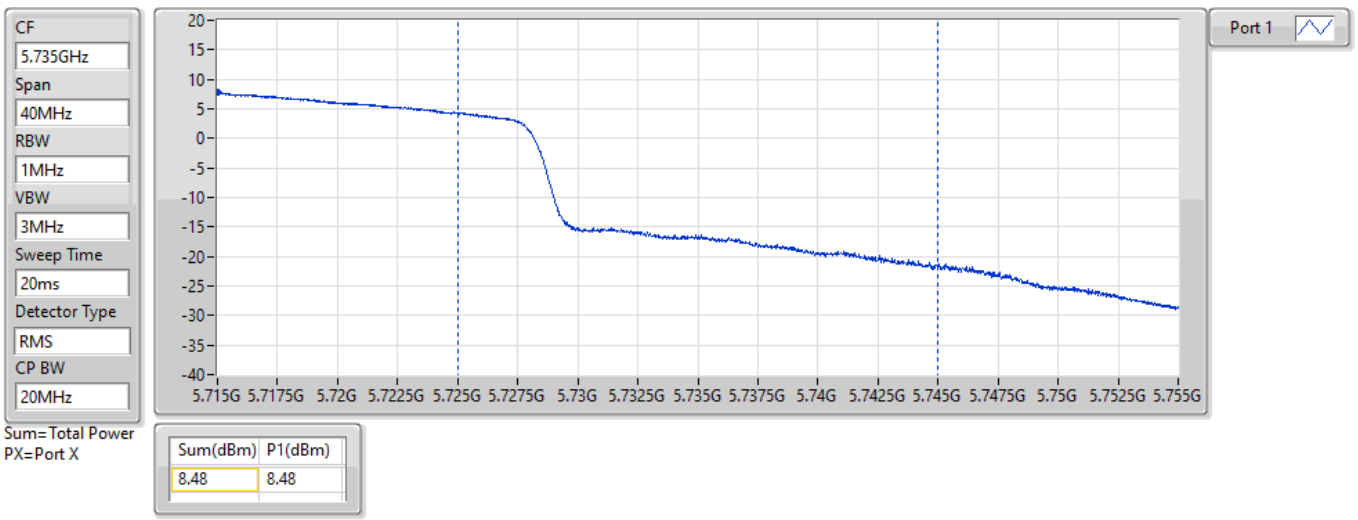

802.11ac VHT80_Nss1,(MCS0)_1TX AV Power

5690MHz Straddle 5.47-5.725GHz_TnomVnom

20/05/2022

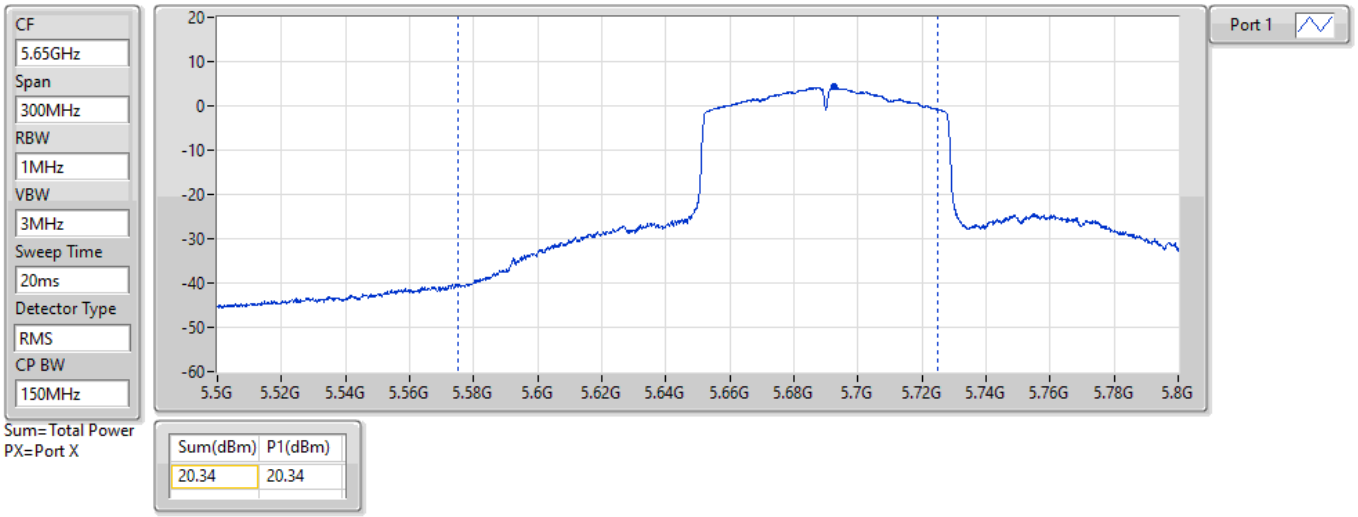


Sum(dBm)	P1(dBm)
20.34	20.34

802.11ac VHT80_Nss1,(MCS0)_1TX AV Power

5690MHz Straddle 5.725-5.85GHz_TnomVnom


20/05/2022

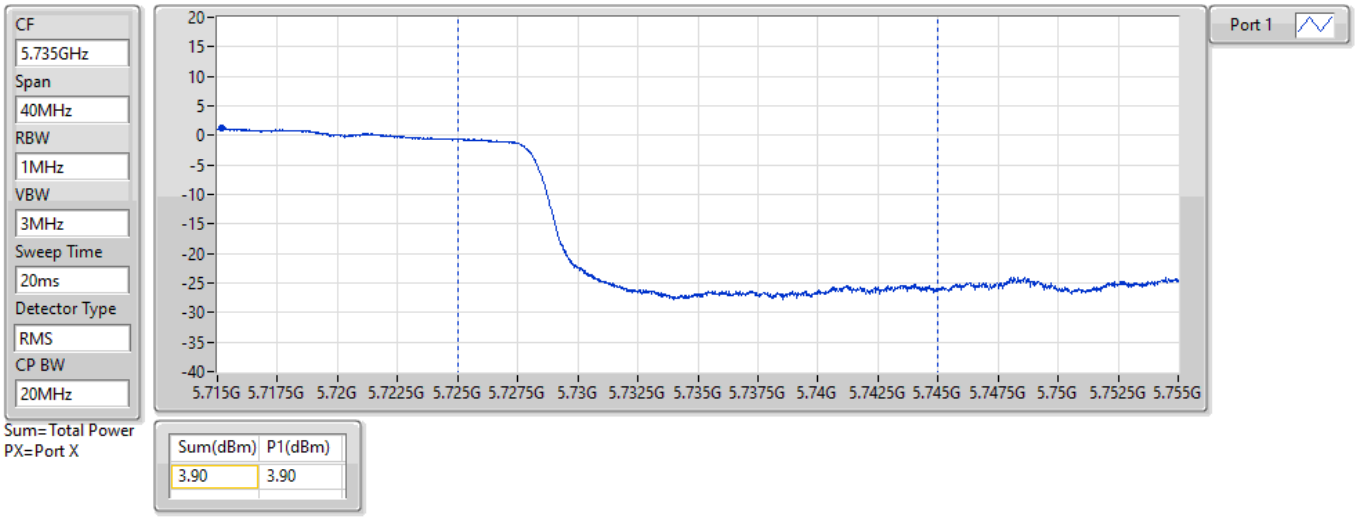

Sum(dBm)	P1(dBm)
3.90	3.90


802.11ac VHT160_Nss1,(MCS0)_1TX AV Power

5250MHz Straddle 5.15-5.25GHz_TnomVnom

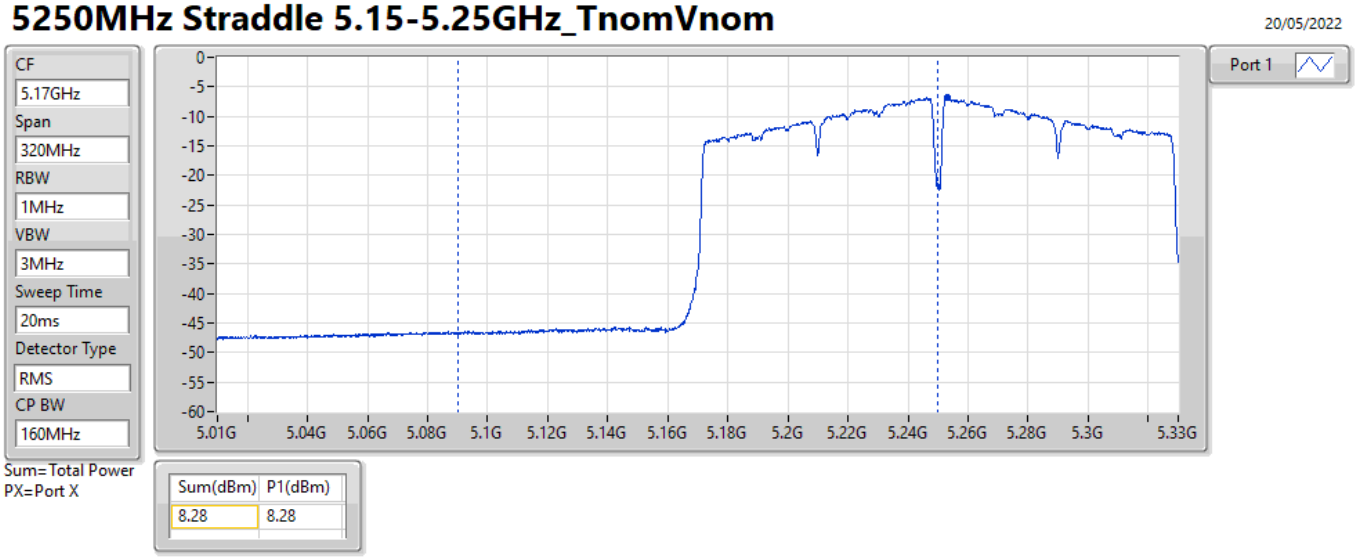

802.11ac VHT160_Nss1,(MCS0)_1TX AV Power


5250MHz Straddle 5.25-5.35GHz_TnomVnom

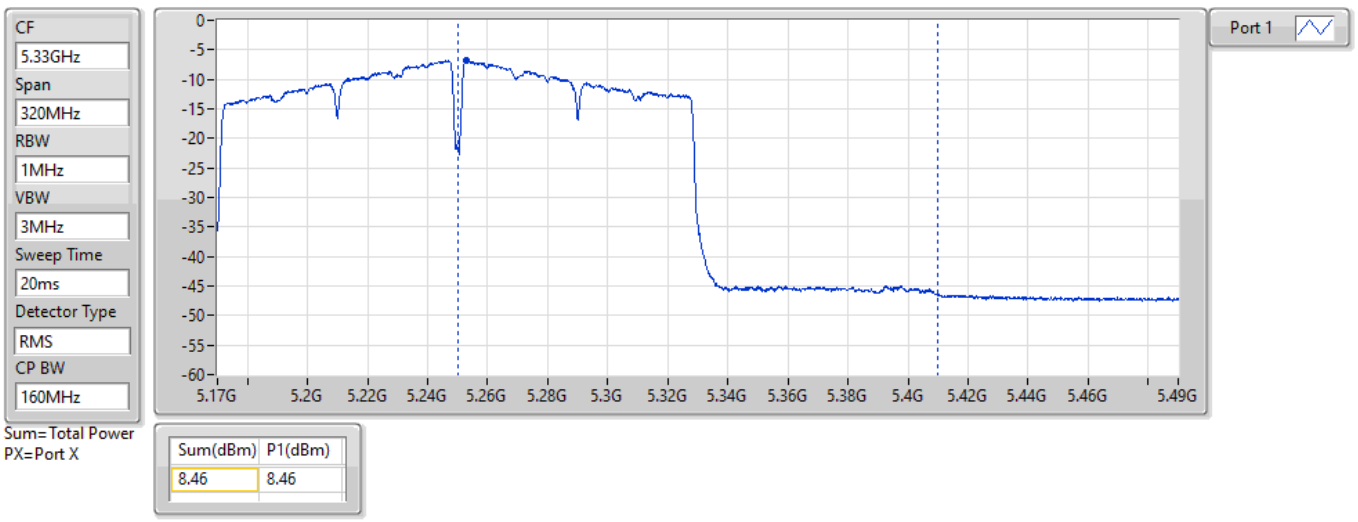

802.11ax HEW20_Nss1,(MCS0)_1TX **AV Power**

5720MHz Straddle 5.47-5.725GHz_TnomVnom


19/05/2022

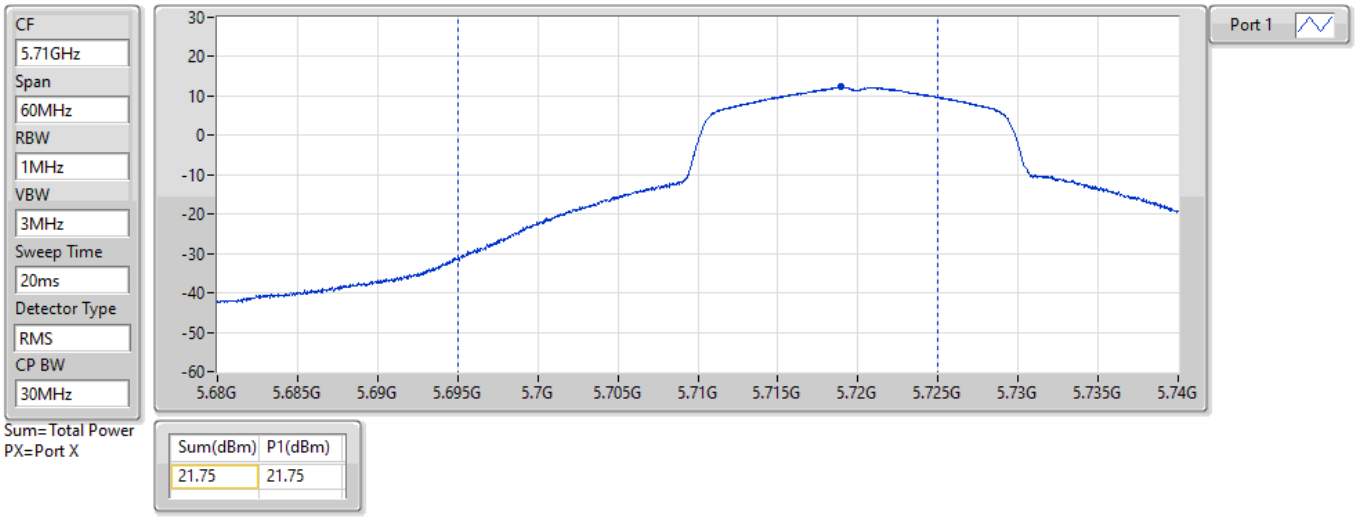

802.11ax HEW20_Nss1,(MCS0)_1TX **AV Power**

5720MHz Straddle 5.725-5.85GHz_TnomVnom


19/05/2022

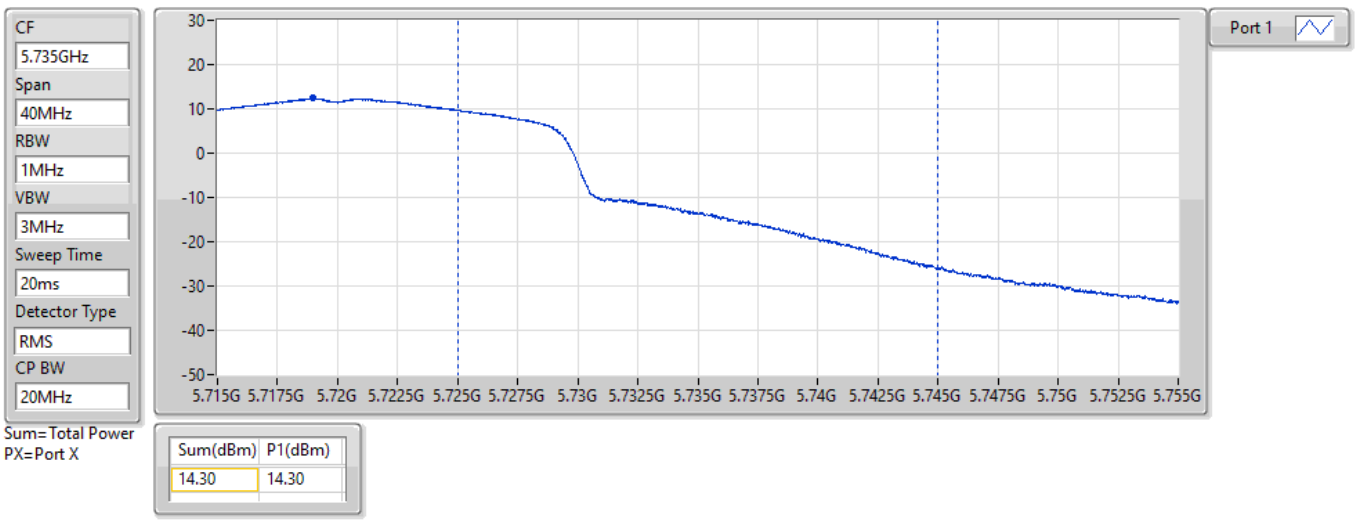

802.11ax HEW40_Nss1,(MCS0)_1TX **AV Power**

5710MHz Straddle 5.47-5.725GHz_TnomVnom


19/05/2022

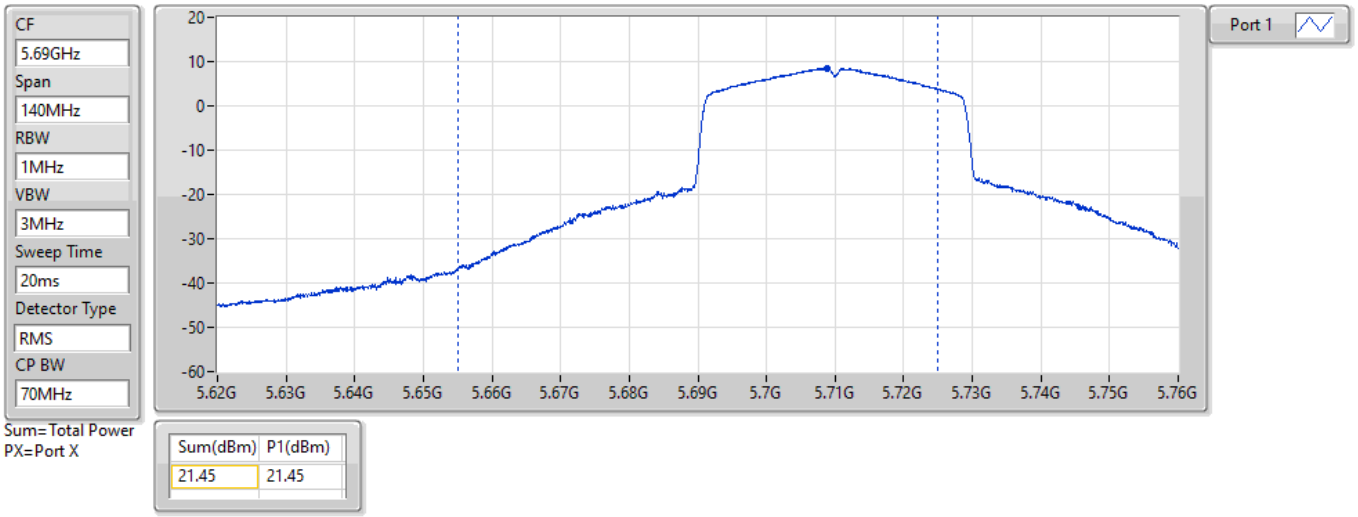

802.11ax HEW40_Nss1,(MCS0)_1TX **AV Power**

5710MHz Straddle 5.725-5.85GHz_TnomVnom


20/05/2022

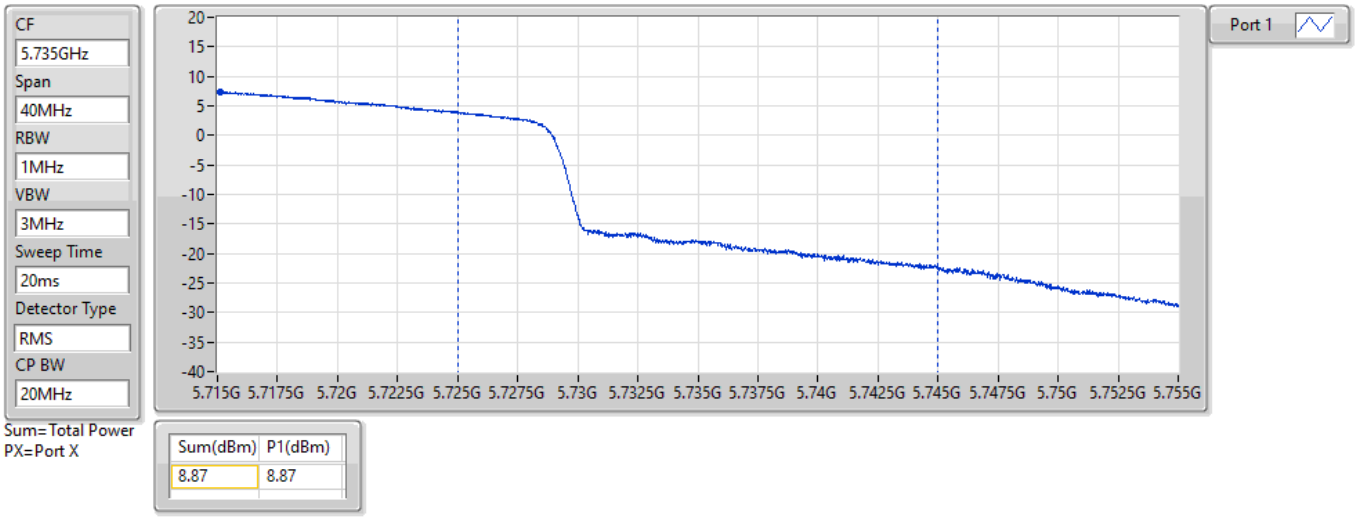

802.11ax HEW80_Nss1,(MCS0)_1TX **AV Power**

5690MHz Straddle 5.47-5.725GHz_TnomVnom


19/05/2022

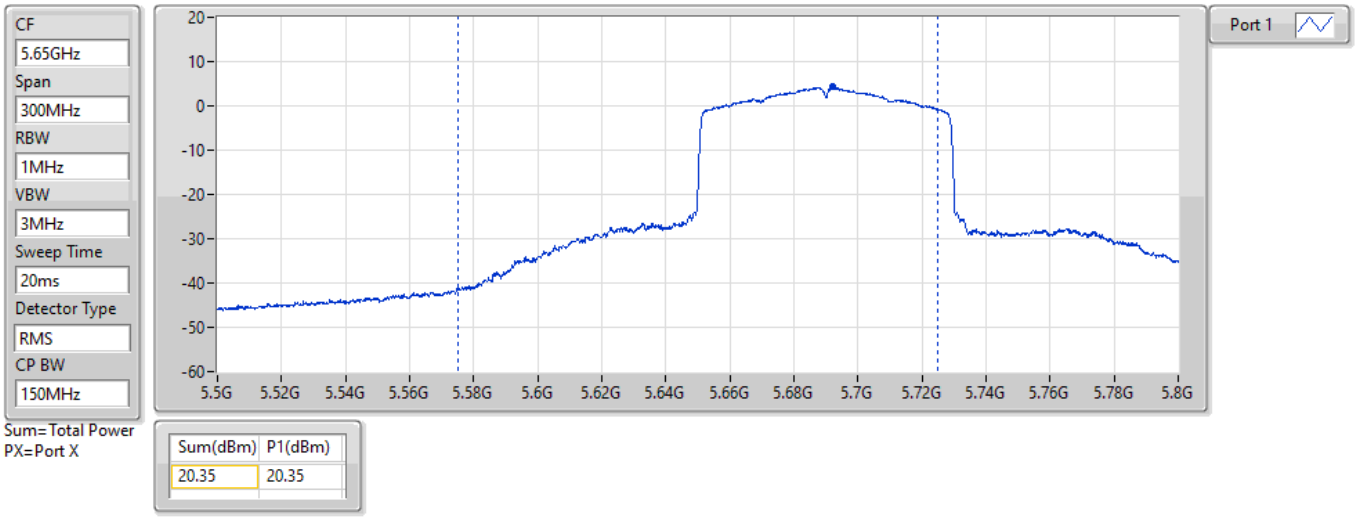

802.11ax HEW80_Nss1,(MCS0)_1TX **AV Power**


5690MHz Straddle 5.725-5.85GHz_TnomVnom

19/05/2022

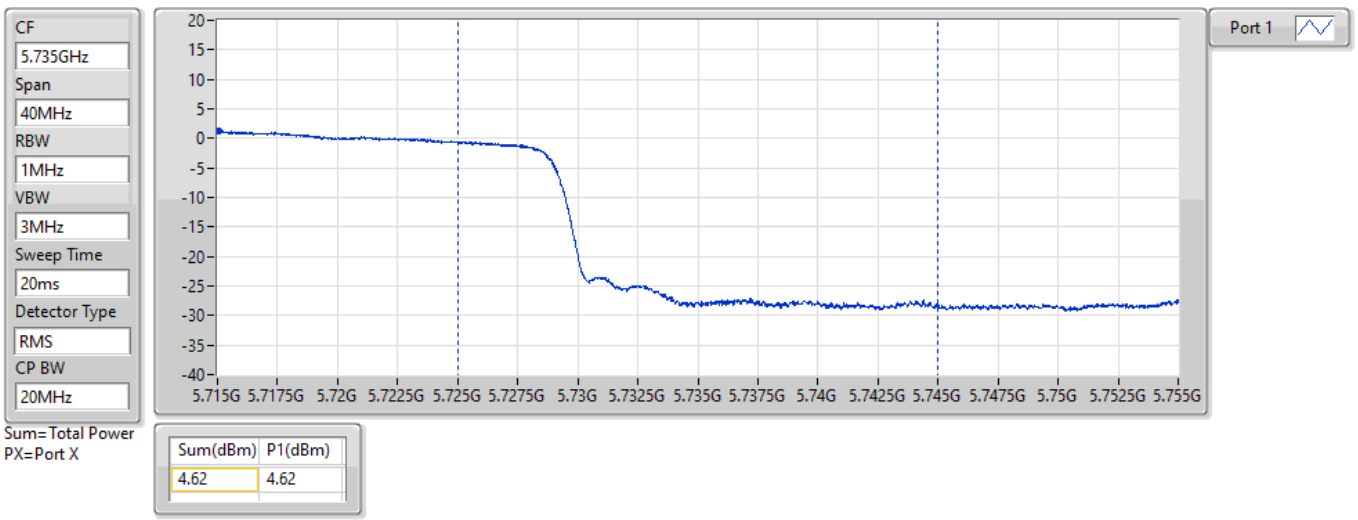


802.11ax HEW160_Nss1,(MCS0)_1TX **AV Power**

5250MHz Straddle 5.15-5.25GHz_TnomVnom

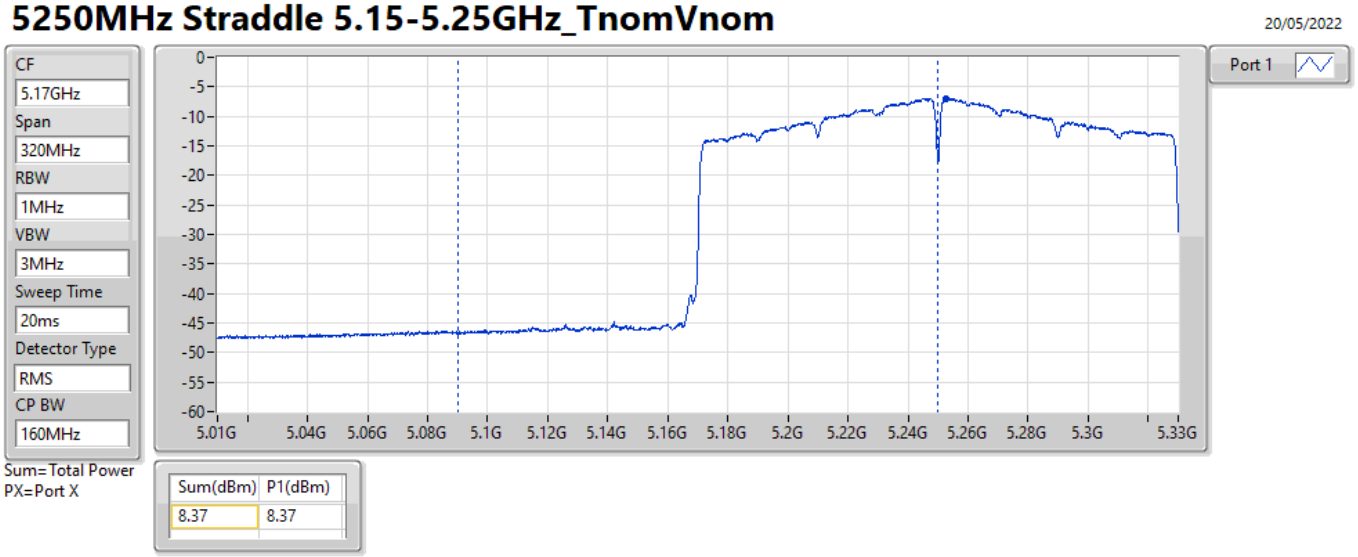

802.11ax HEW160_Nss1,(MCS0)_1TX **AV Power**

5250MHz Straddle 5.25-5.35GHz_TnomVnom

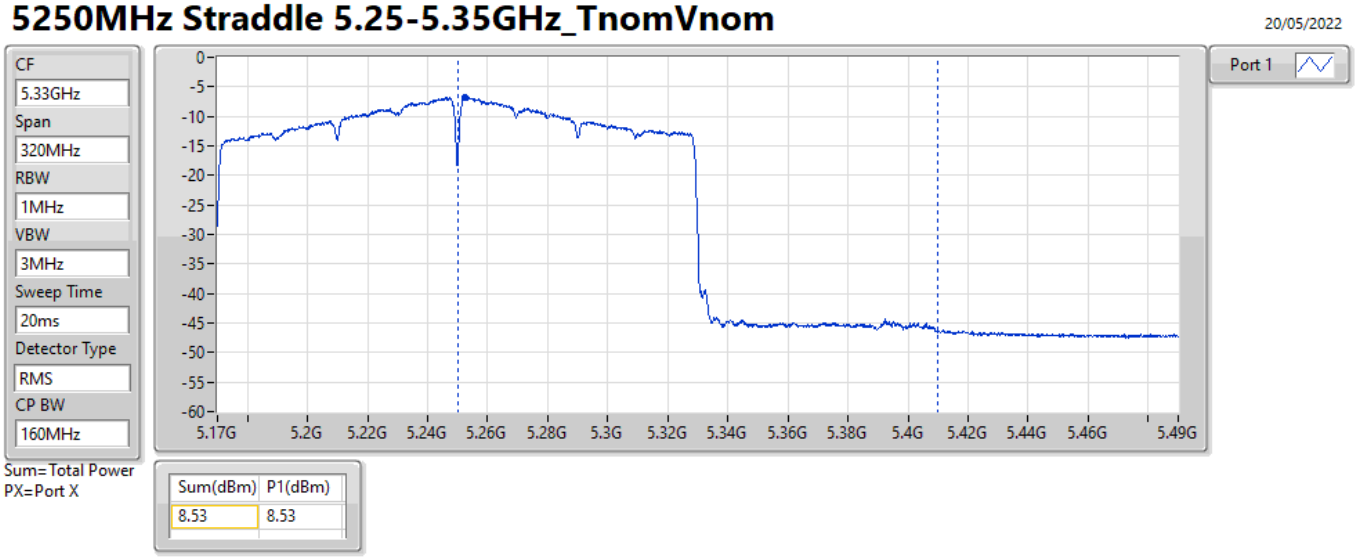

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	19.82	0.09594	24.82	0.30339
802.11ac VHT20_Nss1,(MCS0)_2TX	20.07	0.10162	25.07	0.32137
802.11ac VHT40_Nss1,(MCS0)_2TX	22.72	0.18707	27.72	0.59156
802.11ac VHT80_Nss1,(MCS0)_2TX	16.26	0.04227	21.26	0.13366
802.11ac VHT160_Nss1,(MCS0)_2TX	9.19	0.00830	14.19	0.02624
802.11ax HEW20_Nss1,(MCS0)_2TX	20.11	0.10257	25.11	0.32434
802.11ax HEW40_Nss1,(MCS0)_2TX	22.78	0.18967	27.78	0.59979
802.11ax HEW80_Nss1,(MCS0)_2TX	16.32	0.04285	21.32	0.13552
802.11ax HEW160_Nss1,(MCS0)_2TX	9.53	0.00897	14.53	0.02838
5.25-5.35GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	20.13	0.10304	25.13	0.32584
802.11ac VHT20_Nss1,(MCS0)_2TX	20.08	0.10186	25.08	0.32211
802.11ac VHT40_Nss1,(MCS0)_2TX	22.60	0.18197	27.60	0.57544
802.11ac VHT80_Nss1,(MCS0)_2TX	14.05	0.02541	19.05	0.08035
802.11ac VHT160_Nss1,(MCS0)_2TX	9.39	0.00869	14.39	0.02748
802.11ax HEW20_Nss1,(MCS0)_2TX	20.42	0.11015	25.42	0.34834
802.11ax HEW40_Nss1,(MCS0)_2TX	22.76	0.18880	27.76	0.59704
802.11ax HEW80_Nss1,(MCS0)_2TX	14.23	0.02649	19.23	0.08375
802.11ax HEW160_Nss1,(MCS0)_2TX	9.81	0.00957	14.81	0.03027
5.47-5.725GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	19.96	0.09908	24.96	0.31333
802.11ac VHT20_Nss1,(MCS0)_2TX	20.16	0.10375	25.16	0.32810
802.11ac VHT40_Nss1,(MCS0)_2TX	22.82	0.19143	27.82	0.60534
802.11ac VHT80_Nss1,(MCS0)_2TX	20.43	0.11041	25.43	0.34914
802.11ac VHT160_Nss1,(MCS0)_2TX	13.12	0.02051	18.12	0.06486
802.11ax HEW20_Nss1,(MCS0)_2TX	20.27	0.10641	25.27	0.33651
802.11ax HEW40_Nss1,(MCS0)_2TX	22.83	0.19187	27.83	0.60674
802.11ax HEW80_Nss1,(MCS0)_2TX	20.73	0.11830	25.73	0.37411
802.11ax HEW160_Nss1,(MCS0)_2TX	13.29	0.02133	18.29	0.06745
5.725-5.85GHz	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.89	0.19454	27.89	0.61518
802.11ac VHT20_Nss1,(MCS0)_2TX	22.78	0.18967	27.78	0.59979
802.11ac VHT40_Nss1,(MCS0)_2TX	22.82	0.19143	27.82	0.60534
802.11ac VHT80_Nss1,(MCS0)_2TX	19.30	0.08511	24.30	0.26915
802.11ax HEW20_Nss1,(MCS0)_2TX	22.83	0.19187	27.83	0.60674
802.11ax HEW40_Nss1,(MCS0)_2TX	22.89	0.19454	27.89	0.61518
802.11ax HEW80_Nss1,(MCS0)_2TX	19.35	0.08610	24.35	0.27227

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-
5180MHz	Pass	5.00	16.69	16.86	19.79	30.00	24.79
5200MHz	Pass	5.00	16.73	16.82	19.79	30.00	24.79
5240MHz	Pass	5.00	16.69	16.93	19.82	30.00	24.82
5260MHz	Pass	5.00	16.89	17.17	20.04	23.98	25.04
5300MHz	Pass	5.00	17.07	17.16	20.13	23.98	25.13
5320MHz	Pass	5.00	16.79	16.93	19.87	23.98	24.87
5500MHz	Pass	5.00	16.83	16.92	19.89	23.98	24.89
5580MHz	Pass	5.00	16.79	17.11	19.96	23.98	24.96
5700MHz	Pass	5.00	14.85	15.11	17.99	23.98	22.99
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	16.41	16.88	19.66	23.98	24.66
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	8.27	8.39	11.34	30.00	16.34
5745MHz	Pass	5.00	19.63	19.92	22.79	30.00	27.79
5785MHz	Pass	5.00	19.66	20.08	22.89	30.00	27.89
5825MHz	Pass	5.00	20.03	19.66	22.86	30.00	27.86
802.11ac VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5180MHz	Pass	5.00	16.70	16.88	19.80	30.00	24.80
5200MHz	Pass	5.00	16.87	16.69	19.79	30.00	24.79
5240MHz	Pass	5.00	17.01	17.10	20.07	30.00	25.07
5260MHz	Pass	5.00	16.98	17.09	20.05	23.98	25.05
5300MHz	Pass	5.00	17.06	16.85	19.97	23.98	24.97
5320MHz	Pass	5.00	17.03	17.10	20.08	23.98	25.08
5500MHz	Pass	5.00	16.09	16.23	19.17	23.98	24.17
5580MHz	Pass	5.00	17.02	17.27	20.16	23.98	25.16
5700MHz	Pass	5.00	13.23	13.47	16.36	23.98	21.36
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	16.67	16.74	19.72	23.98	24.72
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	8.89	9.14	12.03	30.00	17.03
5745MHz	Pass	5.00	19.41	19.68	22.56	30.00	27.56
5785MHz	Pass	5.00	19.39	19.58	22.50	30.00	27.50
5825MHz	Pass	5.00	19.79	19.74	22.78	30.00	27.78
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5190MHz	Pass	5.00	14.95	14.89	17.93	30.00	22.93
5230MHz	Pass	5.00	19.58	19.83	22.72	30.00	27.72
5270MHz	Pass	5.00	19.78	19.39	22.60	23.98	27.60
5310MHz	Pass	5.00	14.78	15.07	17.94	23.98	22.94
5510MHz	Pass	5.00	15.09	15.45	18.28	23.98	23.28
5550MHz	Pass	5.00	19.88	19.73	22.82	23.98	27.82
5670MHz	Pass	5.00	15.05	15.43	18.25	23.98	23.25
5710MHz Straddle 5.47-5.725GHz	Pass	5.00	19.69	19.30	22.51	23.98	27.51
5710MHz Straddle 5.725-5.85GHz	Pass	5.00	6.61	6.18	9.41	30.00	14.41
5755MHz	Pass	5.00	19.43	19.56	22.51	30.00	27.51
5795MHz	Pass	5.00	19.83	19.79	22.82	30.00	27.82
802.11ac VHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5210MHz	Pass	5.00	13.17	13.33	16.26	30.00	21.26
5290MHz	Pass	5.00	10.94	11.14	14.05	23.98	19.05
5530MHz	Pass	5.00	14.05	14.17	17.12	23.98	22.12
5610MHz	Pass	5.00	14.65	14.83	17.75	23.98	22.75
5690MHz Straddle 5.47-5.725GHz	Pass	5.00	17.40	17.43	20.43	23.98	25.43
5690MHz Straddle 5.725-5.85GHz	Pass	5.00	0.68	0.86	3.78	30.00	8.78
5775MHz	Pass	5.00	16.15	16.43	19.30	30.00	24.30
802.11ac VHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	5.00	6.04	6.32	9.19	30.00	14.19
5250MHz Straddle 5.25-5.35GHz	Pass	5.00	6.26	6.49	9.39	23.98	14.39
5570MHz	Pass	5.00	9.89	10.31	13.12	23.98	18.12
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)
5180MHz	Pass	5.00	16.79	16.97	19.89	30.00	24.89
5200MHz	Pass	5.00	16.98	17.22	20.11	30.00	25.11
5240MHz	Pass	5.00	17.08	17.12	20.11	30.00	25.11
5260MHz	Pass	5.00	17.01	17.12	20.08	23.98	25.08
5300MHz	Pass	5.00	17.03	17.16	20.11	23.98	25.11
5320MHz	Pass	5.00	17.35	17.46	20.42	23.98	25.42
5500MHz	Pass	5.00	16.48	16.82	19.66	23.98	24.66
5580MHz	Pass	5.00	17.07	17.44	20.27	23.98	25.27
5700MHz	Pass	5.00	13.32	13.53	16.44	23.98	21.44
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	16.59	16.95	19.78	23.98	24.78
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	9.24	9.62	12.44	30.00	17.44
5745MHz	Pass	5.00	19.63	19.71	22.68	30.00	27.68
5785MHz	Pass	5.00	19.53	19.63	22.59	30.00	27.59
5825MHz	Pass	5.00	19.88	19.76	22.83	30.00	27.83
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5190MHz	Pass	5.00	14.93	15.06	18.01	30.00	23.01
5230MHz	Pass	5.00	19.83	19.71	22.78	30.00	27.78
5270MHz	Pass	5.00	19.70	19.80	22.76	23.98	27.76
5310MHz	Pass	5.00	14.88	15.14	18.02	23.98	23.02
5510MHz	Pass	5.00	15.26	15.58	18.43	23.98	23.43
5550MHz	Pass	5.00	19.86	19.77	22.83	23.98	27.83
5670MHz	Pass	5.00	15.09	15.45	18.28	23.98	23.28
5710MHz Straddle 5.47-5.725GHz	Pass	5.00	19.64	19.59	22.63	23.98	27.63
5710MHz Straddle 5.725-5.85GHz	Pass	5.00	7.05	6.99	10.03	30.00	15.03
5755MHz	Pass	5.00	19.83	19.77	22.81	30.00	27.81
5795MHz	Pass	5.00	19.93	19.82	22.89	30.00	27.89
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5210MHz	Pass	5.00	13.19	13.42	16.32	30.00	21.32
5290MHz	Pass	5.00	11.17	11.26	14.23	23.98	19.23
5530MHz	Pass	5.00	14.06	14.20	17.14	23.98	22.14
5610MHz	Pass	5.00	14.67	14.87	17.78	23.98	22.78
5690MHz Straddle 5.47-5.725GHz	Pass	5.00	17.68	17.76	20.73	23.98	25.73
5690MHz Straddle 5.725-5.85GHz	Pass	5.00	1.66	2.08	4.89	30.00	9.89
5775MHz	Pass	5.00	16.28	16.40	19.35	30.00	24.35
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	5.00	6.42	6.61	9.53	30.00	14.53
5250MHz Straddle 5.25-5.35GHz	Pass	5.00	6.66	6.94	9.81	23.98	14.81
5570MHz	Pass	5.00	10.08	10.47	13.29	23.98	18.29

DG = Directional Gain; Port X = Port X output power

802.11a_Nss1,(6Mbps)_2TX **AV Power**

5720MHz Straddle 5.47-5.725GHz_TnomVnom

20/05/2022

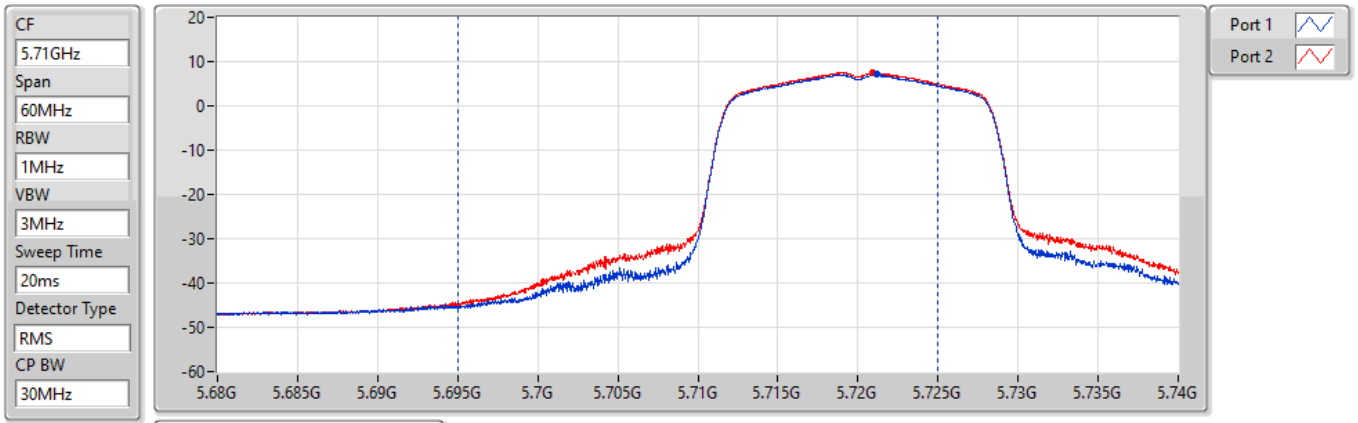


Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)
19.66	16.41	16.88

802.11a_Nss1,(6Mbps)_2TX **AV Power**

5720MHz Straddle 5.725-5.85GHz_TnomVnom

20/05/2022

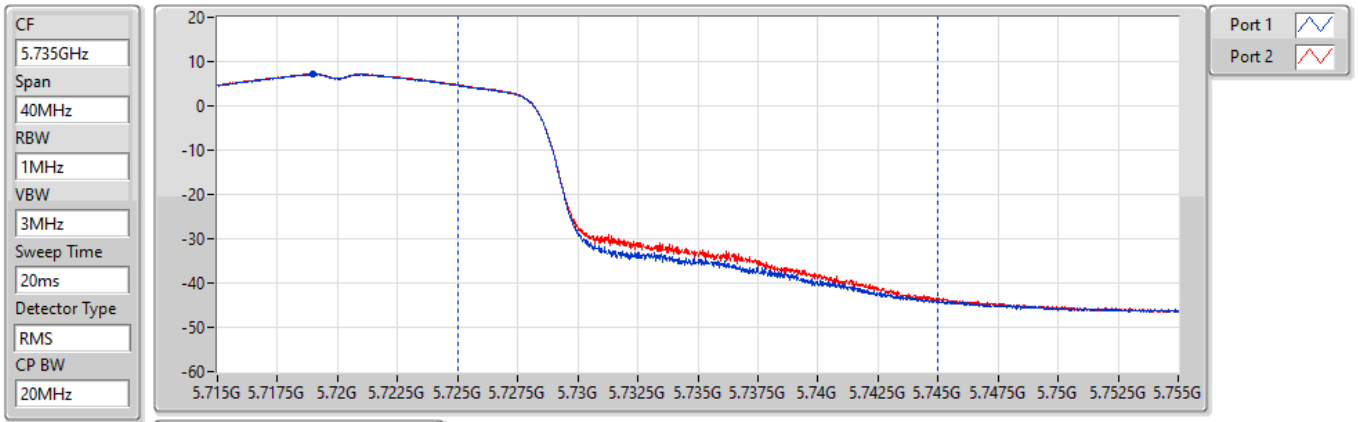


Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)
11.34	8.27	8.39

802.11ac VHT20_Nss1,(MCS0)_2TX **AV Power**

5720MHz Straddle 5.47-5.725GHz_TnomVnom

20/05/2022

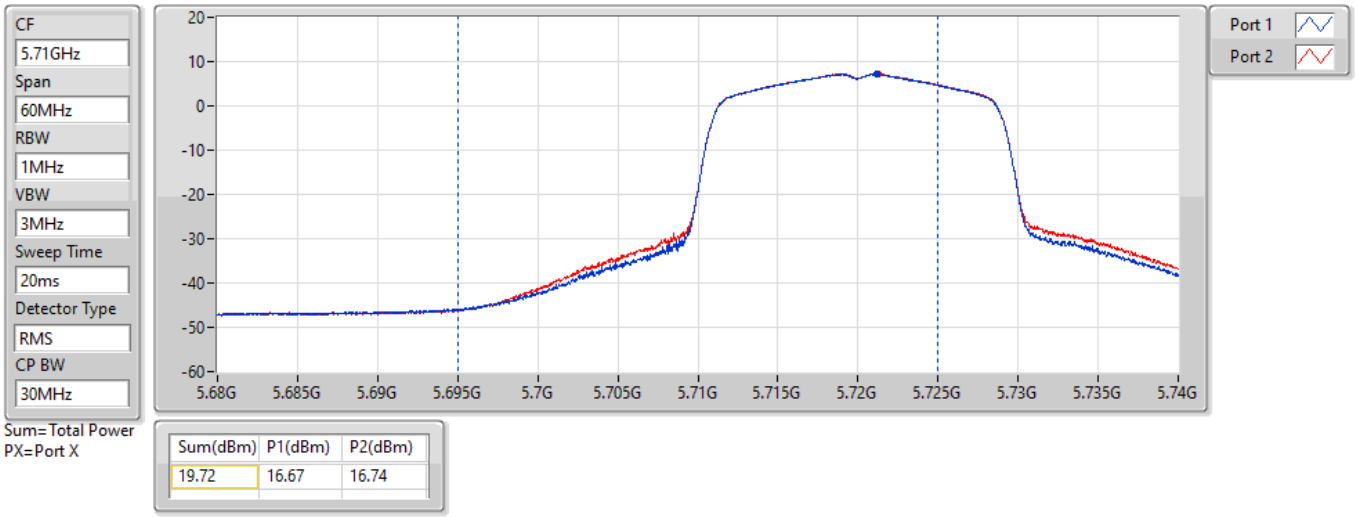


Sum(dBm)	P1(dBm)	P2(dBm)
19.72	16.67	16.74

802.11ac VHT20_Nss1,(MCS0)_2TX **AV Power**

5720MHz Straddle 5.725-5.85GHz_TnomVnom

20/05/2022

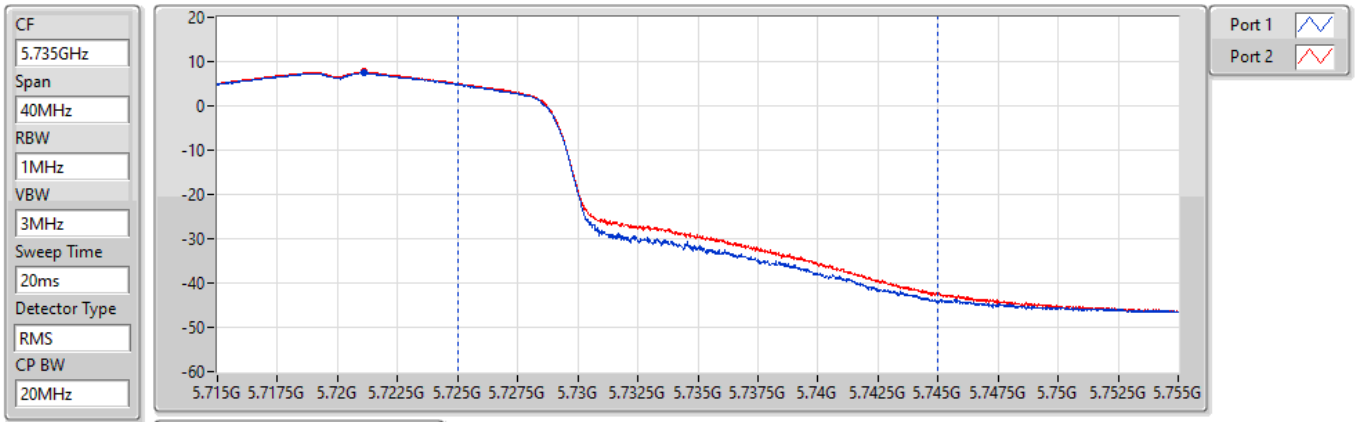


Sum(dBm)	P1(dBm)	P2(dBm)
12.03	8.89	9.14

802.11ac VHT40_Nss1,(MCS0)_2TX AV Power

5710MHz Straddle 5.47-5.725GHz_TnomVnom

20/05/2022

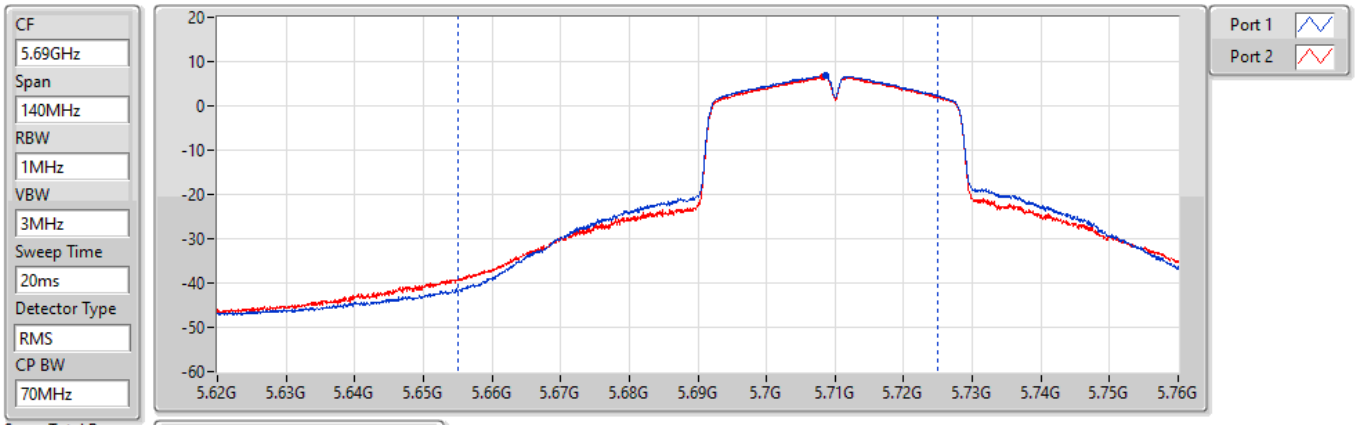


Sum(dBm)	P1(dBm)	P2(dBm)
22.51	19.69	19.30

802.11ac VHT40_Nss1,(MCS0)_2TX AV Power

5710MHz Straddle 5.725-5.85GHz_TnomVnom

20/05/2022

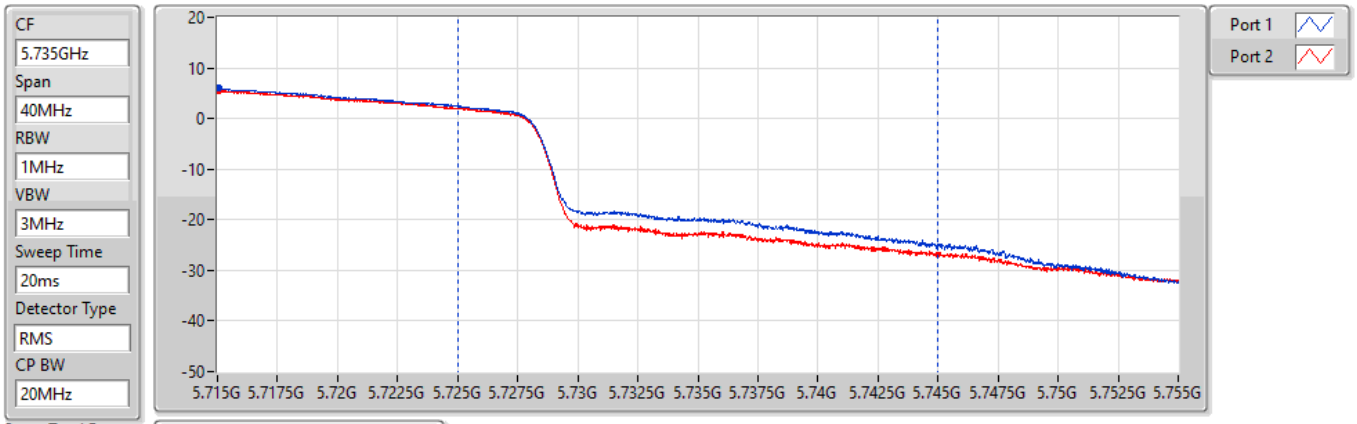


Sum(dBm)	P1(dBm)	P2(dBm)
9.41	6.61	6.18

802.11ac VHT80_Nss1,(MCS0)_2TX AV Power

5690MHz Straddle 5.47-5.725GHz_TnomVnom

22/05/2022

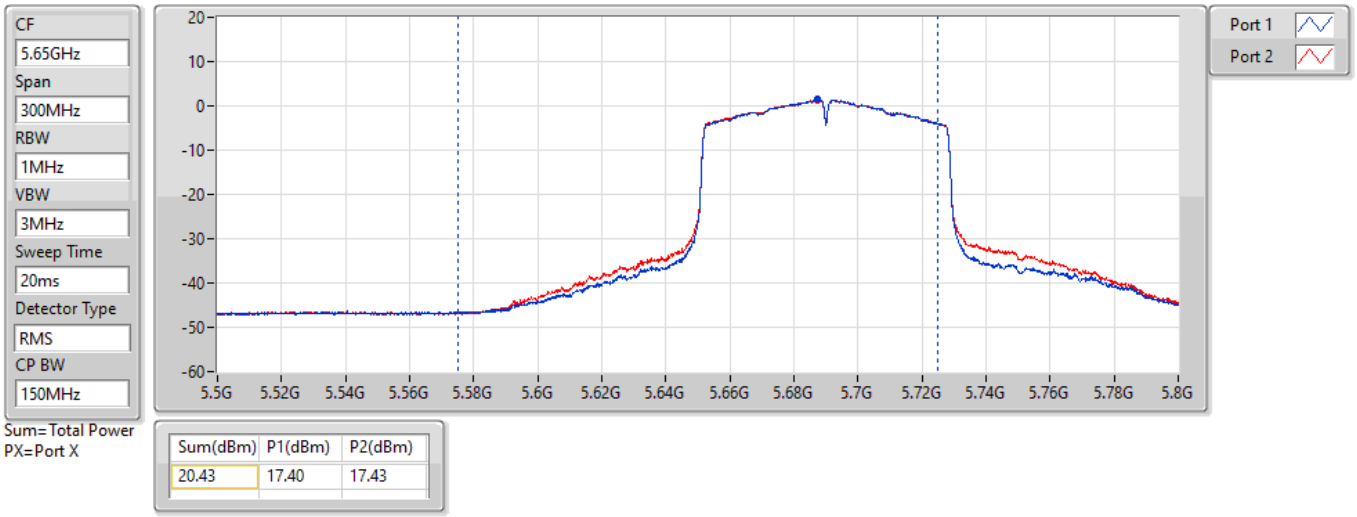


Sum(dBm)	P1(dBm)	P2(dBm)
20.43	17.40	17.43

802.11ac VHT80_Nss1,(MCS0)_2TX AV Power

5690MHz Straddle 5.725-5.85GHz_TnomVnom

22/05/2022

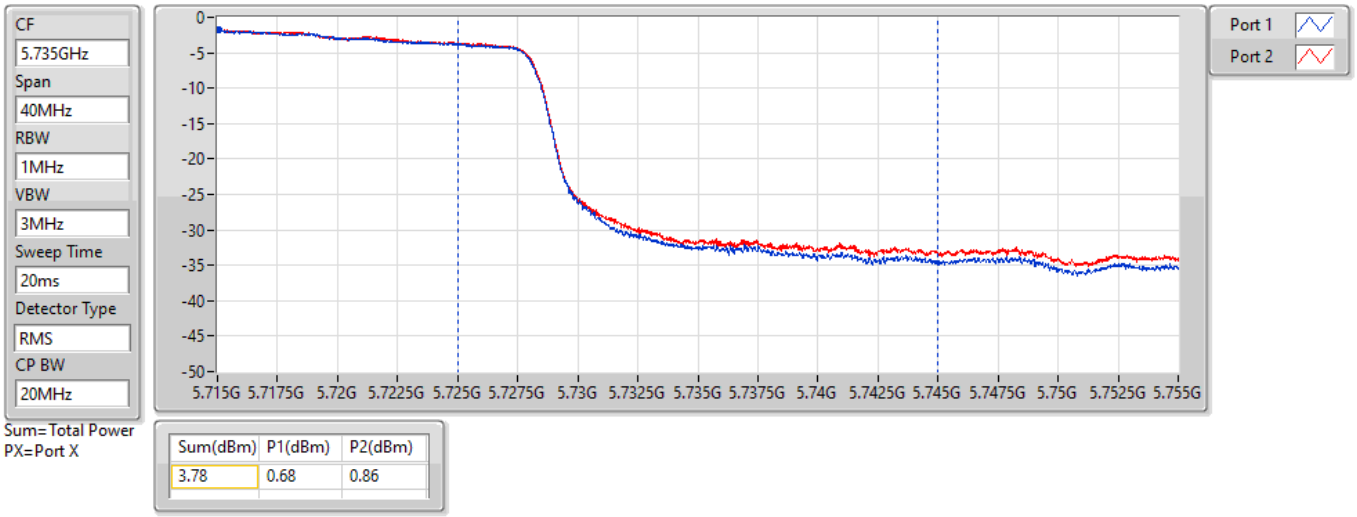


Sum(dBm)	P1(dBm)	P2(dBm)
3.78	0.68	0.86

802.11ac VHT160_Nss1,(MCS0)_2TX **AV Power**

5250MHz Straddle 5.15-5.25GHz_TnomVnom

21/05/2022

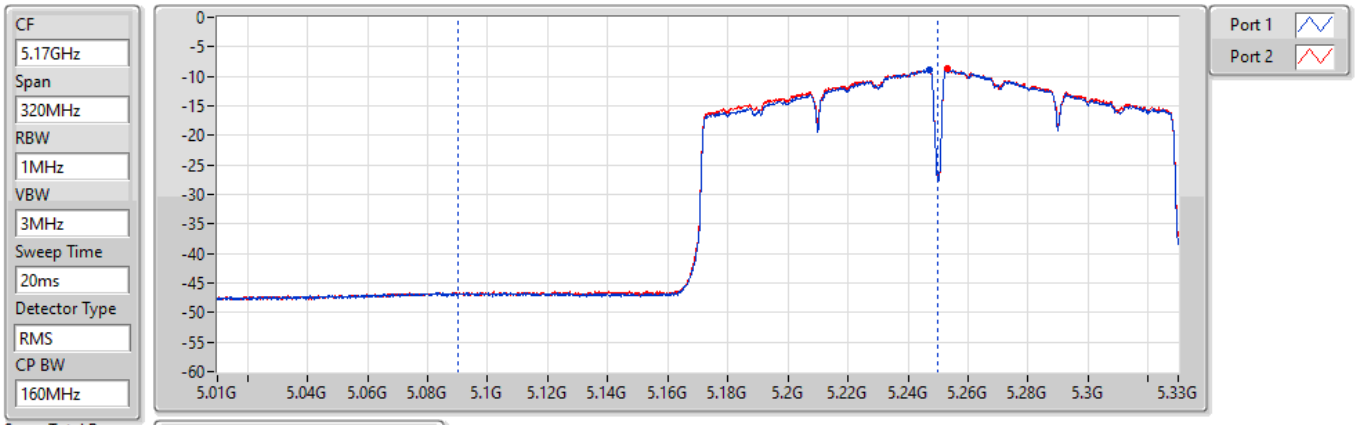


Sum(dBm)	P1(dBm)	P2(dBm)
9.19	6.04	6.32

802.11ac VHT160_Nss1,(MCS0)_2TX **AV Power**

5250MHz Straddle 5.25-5.35GHz_TnomVnom

21/05/2022

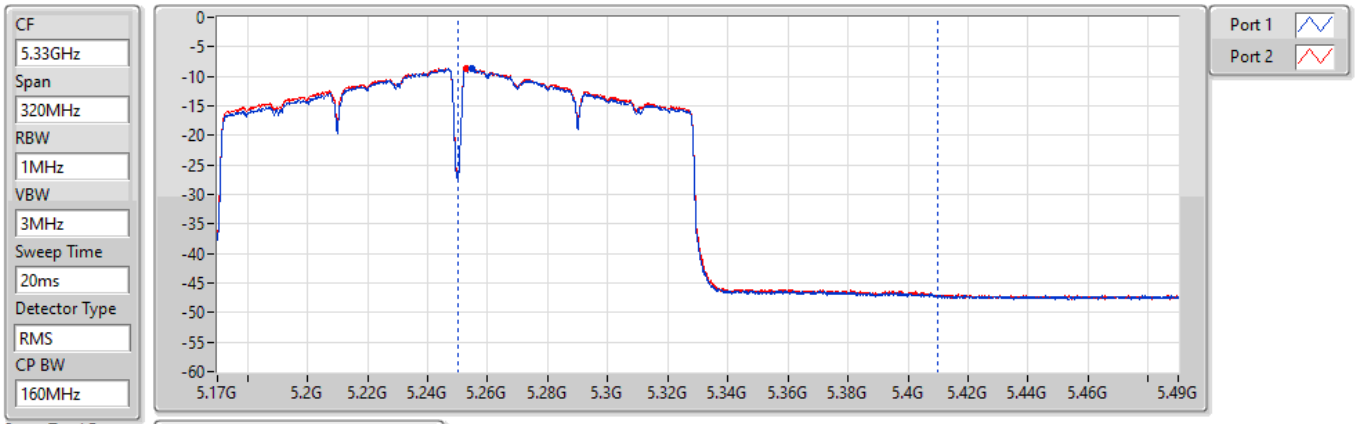


Sum(dBm)	P1(dBm)	P2(dBm)
9.39	6.26	6.49

802.11ax HEW20_Nss1,(MCS0)_2TX **AV Power**

5720MHz Straddle 5.47-5.725GHz_TnomVnom

20/05/2022

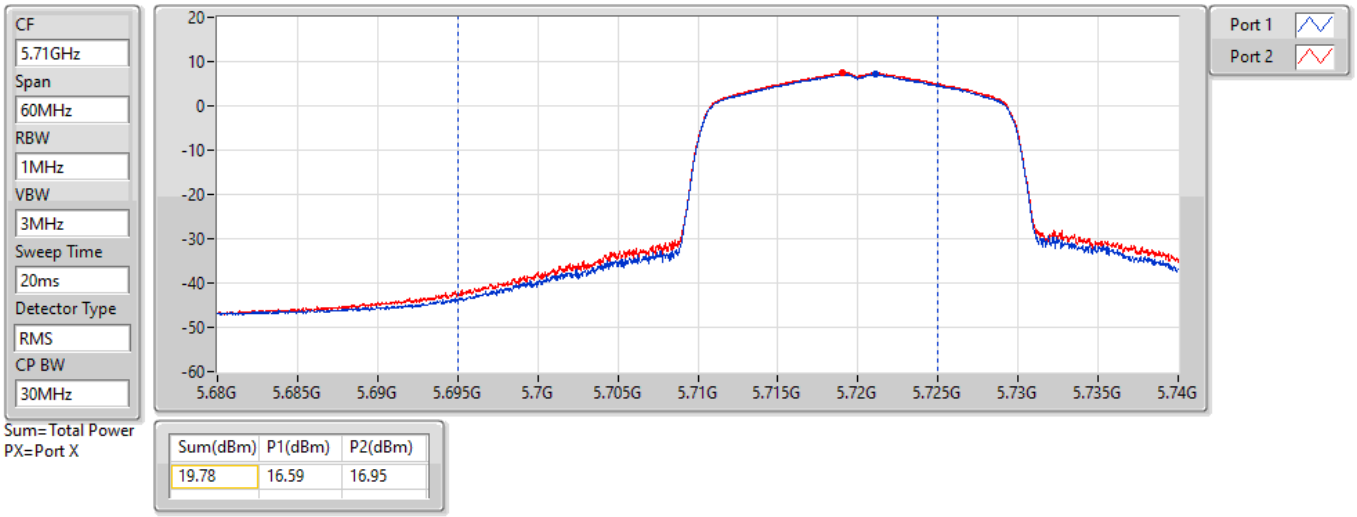


Sum(dBm)	P1(dBm)	P2(dBm)
19.78	16.59	16.95

802.11ax HEW20_Nss1,(MCS0)_2TX **AV Power**

5720MHz Straddle 5.725-5.85GHz_TnomVnom

20/05/2022

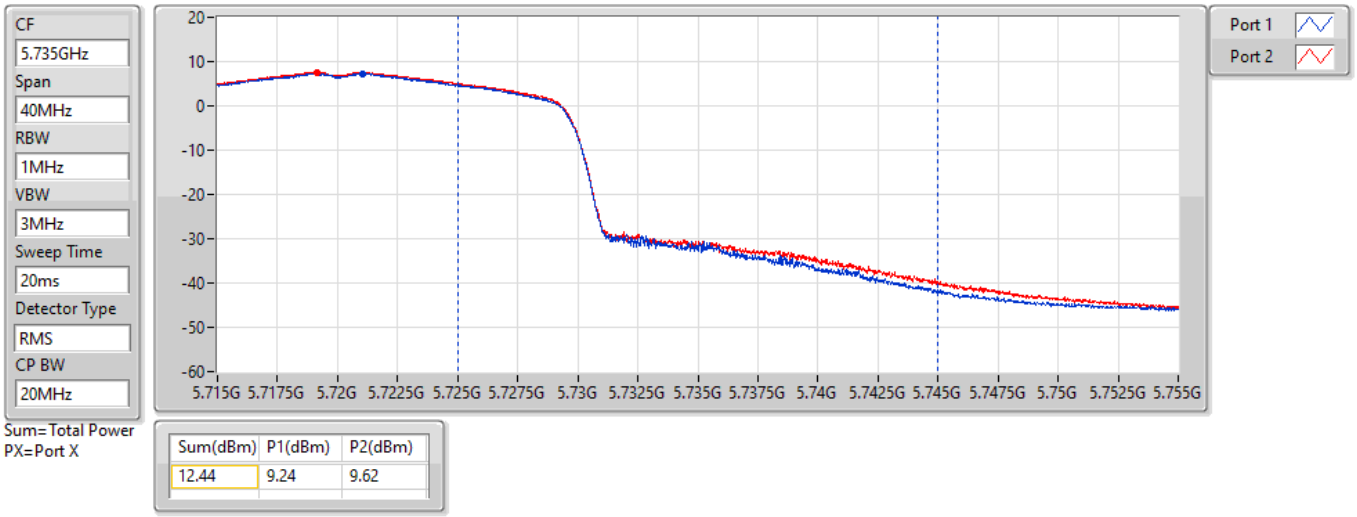


Sum(dBm)	P1(dBm)	P2(dBm)
12.44	9.24	9.62

802.11ax HEW40_Nss1,(MCS0)_2TX **AV Power**

5710MHz Straddle 5.47-5.725GHz_TnomVnom

20/05/2022

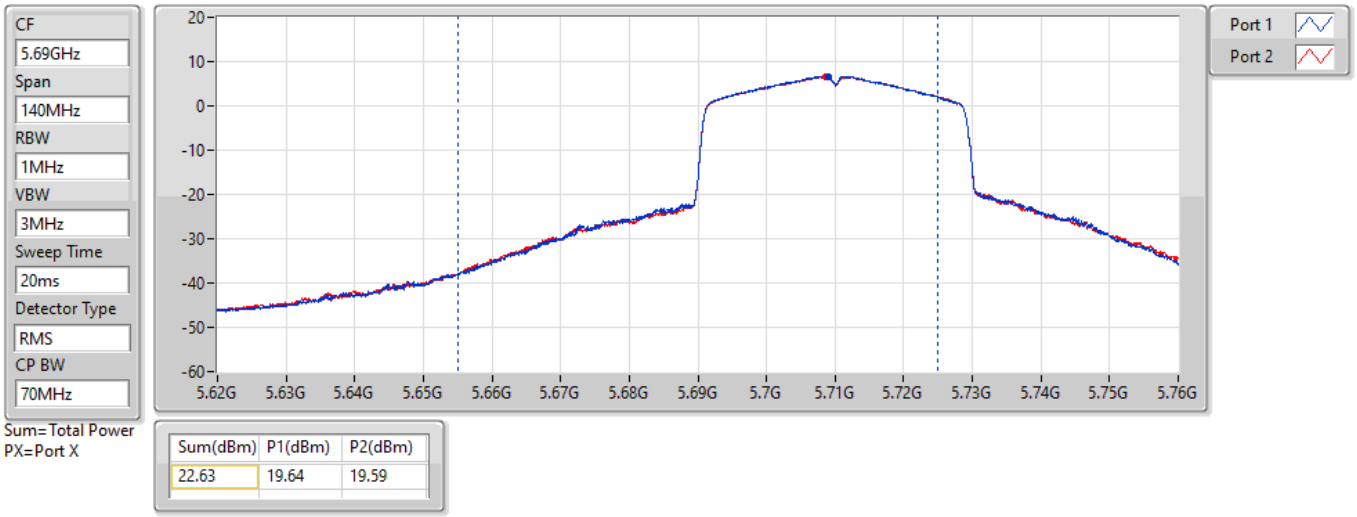


Sum(dBm)	P1(dBm)	P2(dBm)
22.63	19.64	19.59

802.11ax HEW40_Nss1,(MCS0)_2TX **AV Power**

5710MHz Straddle 5.725-5.85GHz_TnomVnom

20/05/2022

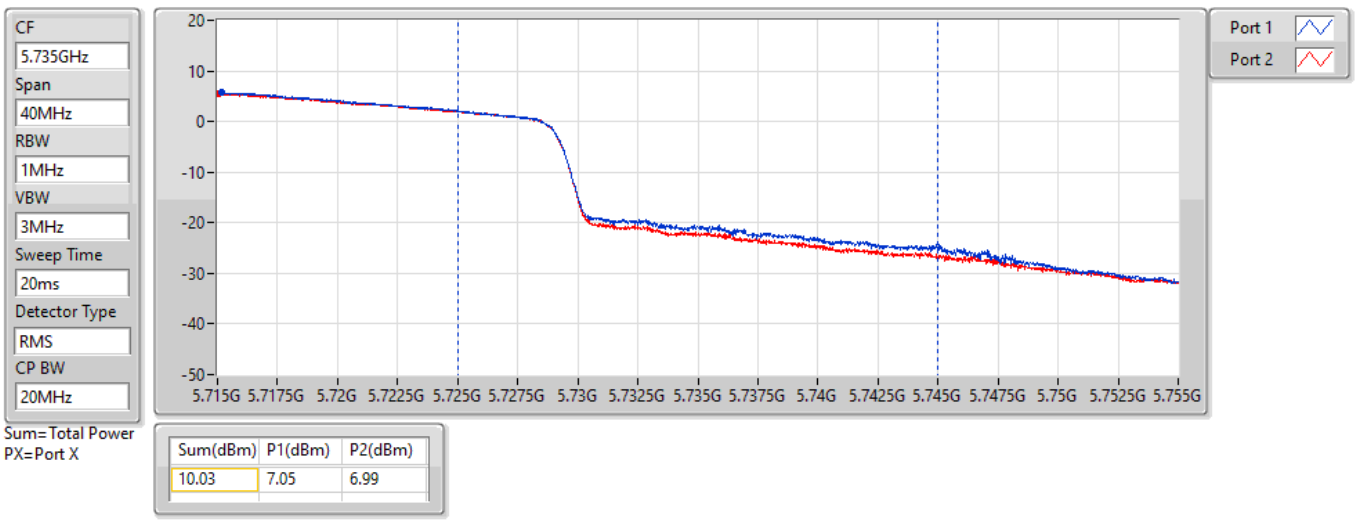


Sum(dBm)	P1(dBm)	P2(dBm)
10.03	7.05	6.99

802.11ax HEW80_Nss1,(MCS0)_2TX AV Power

5690MHz Straddle 5.47-5.725GHz_TnomVnom

22/05/2022

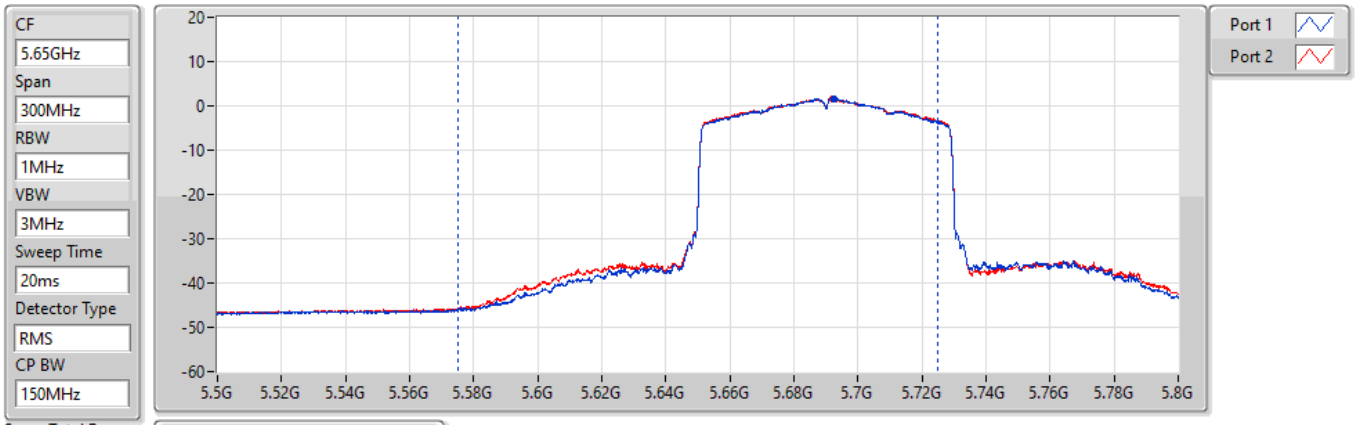


Sum(dBm)	P1(dBm)	P2(dBm)
20.73	17.68	17.76

802.11ax HEW80_Nss1,(MCS0)_2TX AV Power

5690MHz Straddle 5.725-5.85GHz_TnomVnom

22/05/2022

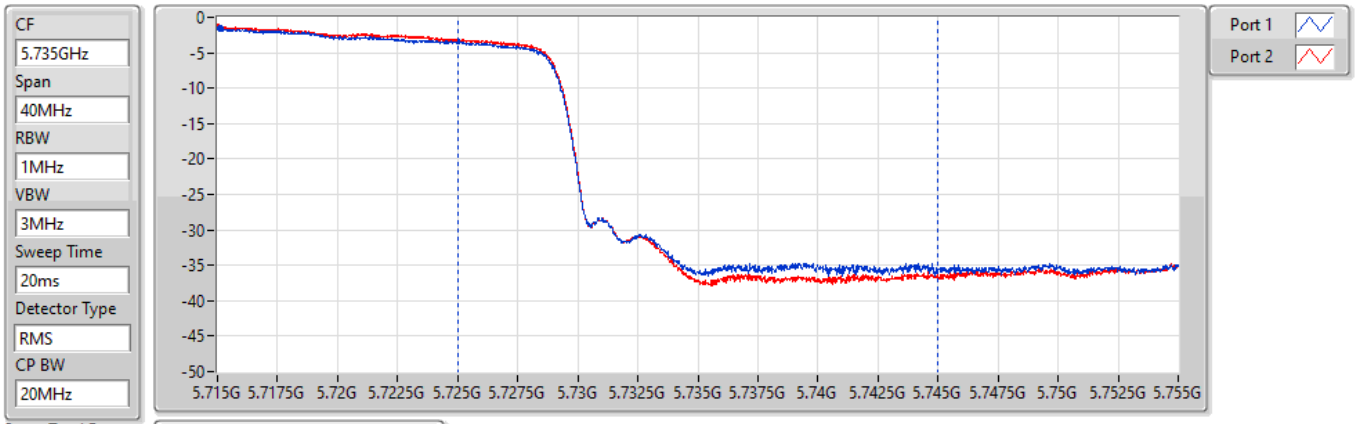


Sum(dBm)	P1(dBm)	P2(dBm)
4.89	1.66	2.08

802.11ax HEW160_Nss1,(MCS0)_2TX **AV Power**

5250MHz Straddle 5.15-5.25GHz_TnomVnom

20/05/2022

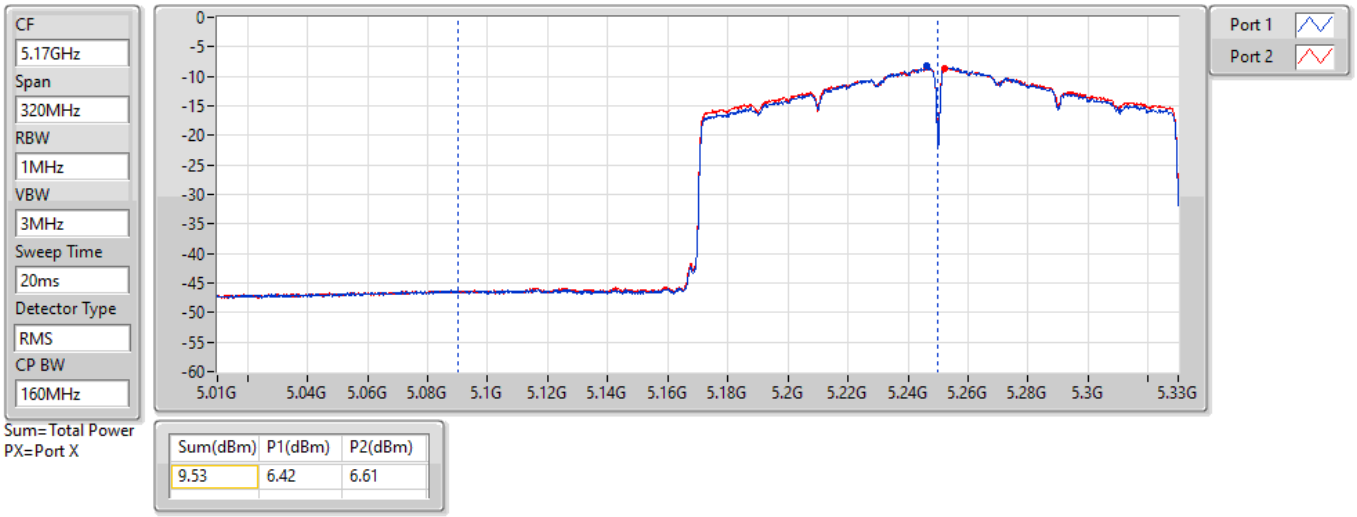


Sum(dBm)	P1(dBm)	P2(dBm)
9.53	6.42	6.61

802.11ax HEW160_Nss1,(MCS0)_2TX **AV Power**

5250MHz Straddle 5.25-5.35GHz_TnomVnom

20/05/2022

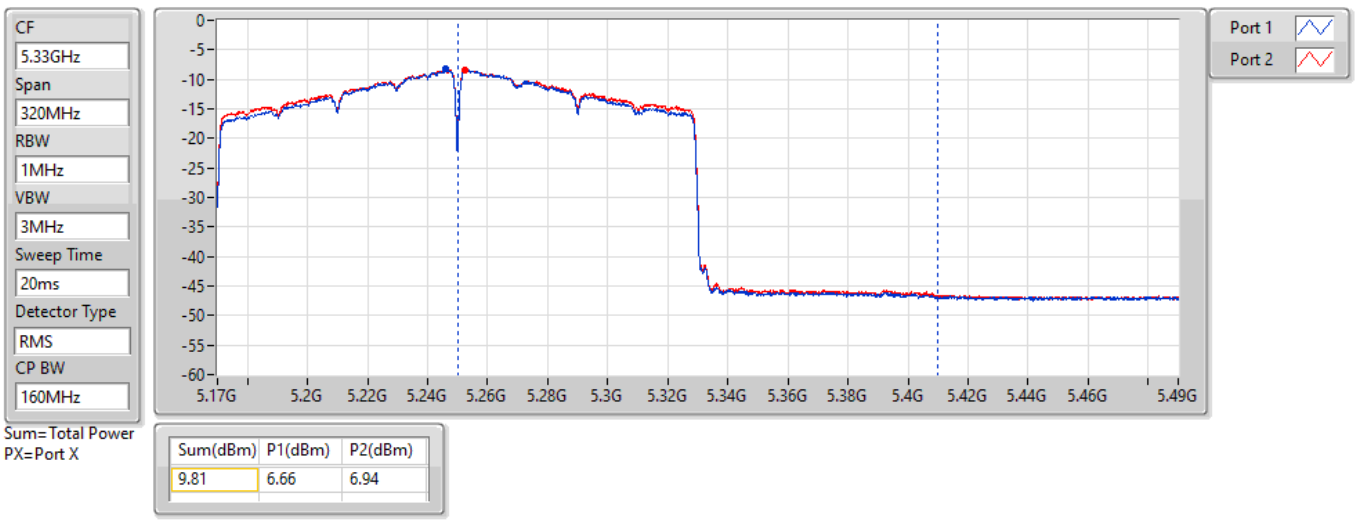

Sum(dBm)	P1(dBm)	P2(dBm)
9.81	6.66	6.94

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	19.80	0.09550	27.81	0.60395
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	19.78	0.09506	27.79	0.60117
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	16.26	0.04227	24.27	0.26730
802.11ac VHT160-BF_Nss1,(MCS0)_2TX	9.19	0.00830	17.20	0.05248
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	19.96	0.09908	27.97	0.62661
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	19.81	0.09572	27.82	0.60534
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	16.32	0.04285	24.33	0.27102
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	9.53	0.00897	17.54	0.05675
5.25-5.35GHz	-	-	-	-
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	19.89	0.09750	27.90	0.61660
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	19.85	0.09661	27.86	0.61094
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	14.05	0.02541	22.06	0.16069
802.11ac VHT160-BF_Nss1,(MCS0)_2TX	9.39	0.00869	17.40	0.05495
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	19.92	0.09817	27.93	0.62087
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	19.86	0.09683	27.87	0.61235
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	14.23	0.02649	22.24	0.16749
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	9.81	0.00957	17.82	0.06053
5.47-5.725GHz	-	-	-	-
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	19.83	0.09616	27.84	0.60814
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	19.79	0.09528	27.80	0.60256
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	19.73	0.09397	27.74	0.59429
802.11ac VHT160-BF_Nss1,(MCS0)_2TX	13.12	0.02051	21.13	0.12972
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	19.86	0.09683	27.87	0.61235
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	19.90	0.09772	27.91	0.61802
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	19.81	0.09572	27.82	0.60534
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	13.29	0.02133	21.30	0.13490
5.725-5.85GHz	-	-	-	-
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	19.78	0.09506	27.79	0.60117
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	19.76	0.09462	27.77	0.59841
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	19.30	0.08511	27.31	0.53827
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	19.86	0.09683	27.87	0.61235
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	19.86	0.09683	27.87	0.61235
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	19.35	0.08610	27.36	0.54450

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5180MHz	Pass	8.01	16.70	16.88	19.80	27.99	27.81
5200MHz	Pass	8.01	16.87	16.69	19.79	27.99	27.80
5240MHz	Pass	8.01	16.73	16.85	19.80	27.99	27.81
5260MHz	Pass	8.01	16.81	16.88	19.86	21.97	27.87
5300MHz	Pass	8.01	16.93	16.83	19.89	21.97	27.90
5320MHz	Pass	8.01	16.77	16.89	19.84	21.97	27.85
5500MHz	Pass	8.01	16.09	16.23	19.17	21.97	27.18
5580MHz	Pass	8.01	16.71	16.93	19.83	21.97	27.84
5700MHz	Pass	8.01	13.23	13.47	16.36	21.97	24.37
5720MHz Straddle 5.47-5.725GHz	Pass	8.01	16.67	16.74	19.72	21.97	27.73
5720MHz Straddle 5.725-5.85GHz	Pass	8.01	8.89	9.14	12.03	27.99	20.04
5745MHz	Pass	8.01	16.69	16.85	19.78	27.99	27.79
5785MHz	Pass	8.01	16.73	16.72	19.74	27.99	27.75
5825MHz	Pass	8.01	16.77	16.65	19.72	27.99	27.73
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5190MHz	Pass	8.01	14.95	14.89	17.93	27.99	25.94
5230MHz	Pass	8.01	16.92	16.61	19.78	27.99	27.79
5270MHz	Pass	8.01	16.99	16.69	19.85	21.97	27.86
5310MHz	Pass	8.01	14.78	15.07	17.94	21.97	25.95
5510MHz	Pass	8.01	15.09	15.45	18.28	21.97	26.29
5550MHz	Pass	8.01	16.82	16.74	19.79	21.97	27.80
5670MHz	Pass	8.01	15.05	15.43	18.25	21.97	26.26
5710MHz Straddle 5.47-5.725GHz	Pass	8.01	16.67	16.71	19.70	21.97	27.71
5710MHz Straddle 5.725-5.85GHz	Pass	8.01	6.46	6.54	9.51	27.99	17.52
5755MHz	Pass	8.01	16.68	16.71	19.71	27.99	27.72
5795MHz	Pass	8.01	16.73	16.76	19.76	27.99	27.77
802.11ac VHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5210MHz	Pass	8.01	13.17	13.33	16.26	27.99	24.27
5290MHz	Pass	8.01	10.94	11.14	14.05	21.97	22.06
5530MHz	Pass	8.01	14.05	14.17	17.12	21.97	25.13
5610MHz	Pass	8.01	14.65	14.83	17.75	21.97	25.76
5690MHz Straddle 5.47-5.725GHz	Pass	8.01	16.62	16.81	19.73	21.97	27.74
5690MHz Straddle 5.725-5.85GHz	Pass	8.01	3.27	3.53	6.41	27.99	14.42
5775MHz	Pass	8.01	16.15	16.43	19.30	27.99	27.31
802.11ac VHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	8.01	6.04	6.32	9.19	27.99	17.20
5250MHz Straddle 5.25-5.35GHz	Pass	8.01	6.26	6.49	9.39	21.97	17.40
5570MHz	Pass	8.01	9.89	10.31	13.12	21.97	21.13
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5180MHz	Pass	8.01	16.79	16.97	19.89	27.99	27.90
5200MHz	Pass	8.01	16.89	17.01	19.96	27.99	27.97
5240MHz	Pass	8.01	16.82	16.83	19.84	27.99	27.85
5260MHz	Pass	8.01	16.88	16.92	19.91	21.97	27.92
5300MHz	Pass	8.01	16.94	16.87	19.92	21.97	27.93
5320MHz	Pass	8.01	16.93	16.89	19.92	21.97	27.93
5500MHz	Pass	8.01	16.48	16.82	19.66	21.97	27.67
5580MHz	Pass	8.01	16.71	16.99	19.86	21.97	27.87
5700MHz	Pass	8.01	13.32	13.53	16.44	21.97	24.45
5720MHz Straddle 5.47-5.725GHz	Pass	8.01	16.59	16.95	19.78	21.97	27.79
5720MHz Straddle 5.725-5.85GHz	Pass	8.01	9.24	9.62	12.44	27.99	20.45
5745MHz	Pass	8.01	16.78	16.91	19.86	27.99	27.87
5785MHz	Pass	8.01	16.81	16.77	19.80	27.99	27.81
5825MHz	Pass	8.01	16.85	16.73	19.80	27.99	27.81
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)
5190MHz	Pass	8.01	14.93	15.06	18.01	27.99	26.02
5230MHz	Pass	8.01	16.88	16.71	19.81	27.99	27.82
5270MHz	Pass	8.01	16.94	16.76	19.86	21.97	27.87
5310MHz	Pass	8.01	14.88	15.14	18.02	21.97	26.03
5510MHz	Pass	8.01	15.26	15.58	18.43	21.97	26.44
5550MHz	Pass	8.01	16.84	16.88	19.87	21.97	27.88
5670MHz	Pass	8.01	15.09	15.45	18.28	21.97	26.29
5710MHz Straddle 5.47-5.725GHz	Pass	8.01	16.81	16.97	19.90	21.97	27.91
5710MHz Straddle 5.725-5.85GHz	Pass	8.01	6.28	6.84	9.58	27.99	17.59
5755MHz	Pass	8.01	16.83	16.73	19.79	27.99	27.80
5795MHz	Pass	8.01	16.82	16.88	19.86	27.99	27.87
802.11ax HEW80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5210MHz	Pass	8.01	13.19	13.42	16.32	27.99	24.33
5290MHz	Pass	8.01	11.17	11.26	14.23	21.97	22.24
5530MHz	Pass	8.01	14.06	14.20	17.14	21.97	25.15
5610MHz	Pass	8.01	14.67	14.87	17.78	21.97	25.79
5690MHz Straddle 5.47-5.725GHz	Pass	8.01	16.68	16.91	19.81	21.97	27.82
5690MHz Straddle 5.725-5.85GHz	Pass	8.01	3.99	4.23	7.12	27.99	15.13
5775MHz	Pass	8.01	16.28	16.40	19.35	27.99	27.36
802.11ax HEW160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	8.01	6.42	6.61	9.53	27.99	17.54
5250MHz Straddle 5.25-5.35GHz	Pass	8.01	6.66	6.94	9.81	21.97	17.82
5570MHz	Pass	8.01	10.08	10.47	13.29	21.97	21.30

DG = Directional Gain; Port X = Port X output power

802.11ac VHT20_Nss1,(MCS0)_2TX AV Power

5720MHz Straddle 5.47-5.725GHz_TnomVnom

20/05/2022

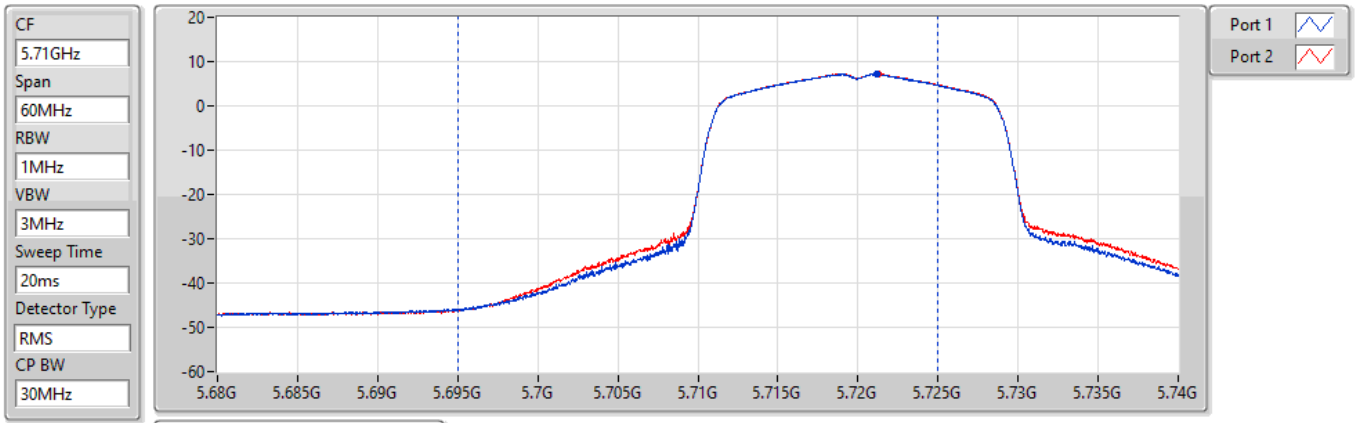


Sum(dBm)	P1(dBm)	P2(dBm)
19.72	16.67	16.74

802.11ac VHT20_Nss1,(MCS0)_2TX AV Power

5720MHz Straddle 5.725-5.85GHz_TnomVnom

20/05/2022

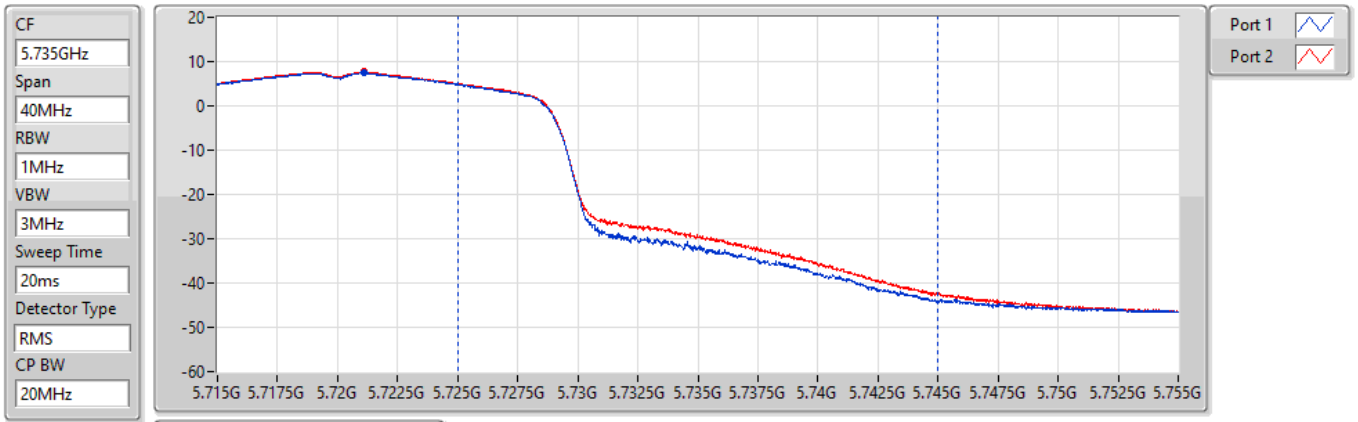


Sum(dBm)	P1(dBm)	P2(dBm)
12.03	8.89	9.14

802.11ac VHT40-BF_Nss1,(MCS0)_2TX AV Power

5710MHz Straddle 5.47-5.725GHz_TnomVnom

04/08/2022

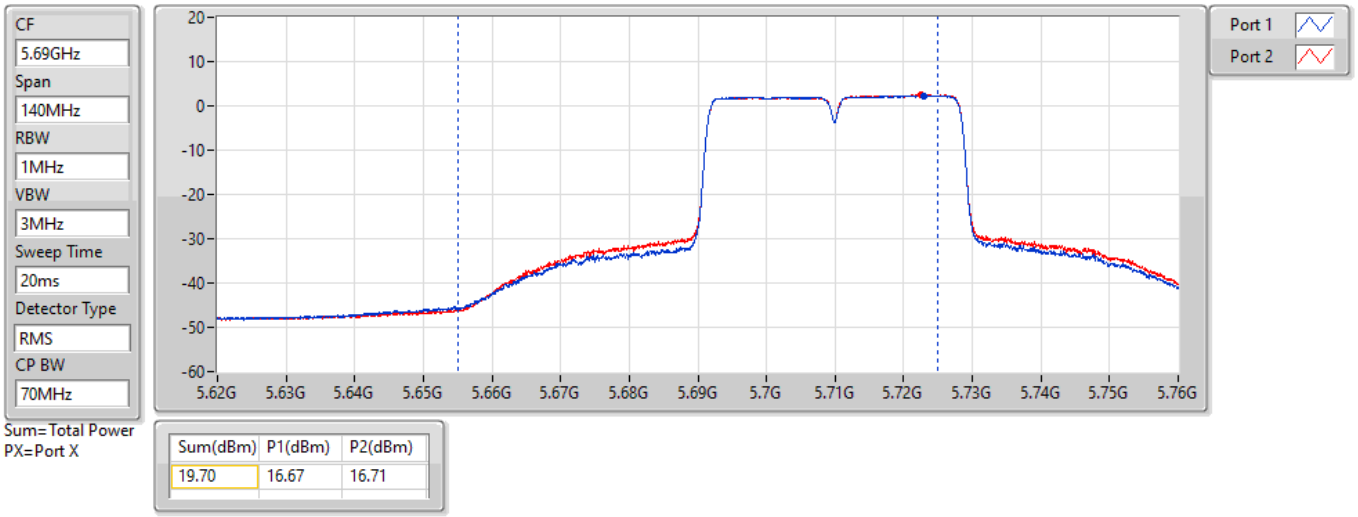


Sum(dBm)	P1(dBm)	P2(dBm)
19.70	16.67	16.71

802.11ac VHT40-BF_Nss1,(MCS0)_2TX AV Power

5710MHz Straddle 5.725-5.85GHz_TnomVnom

04/08/2022

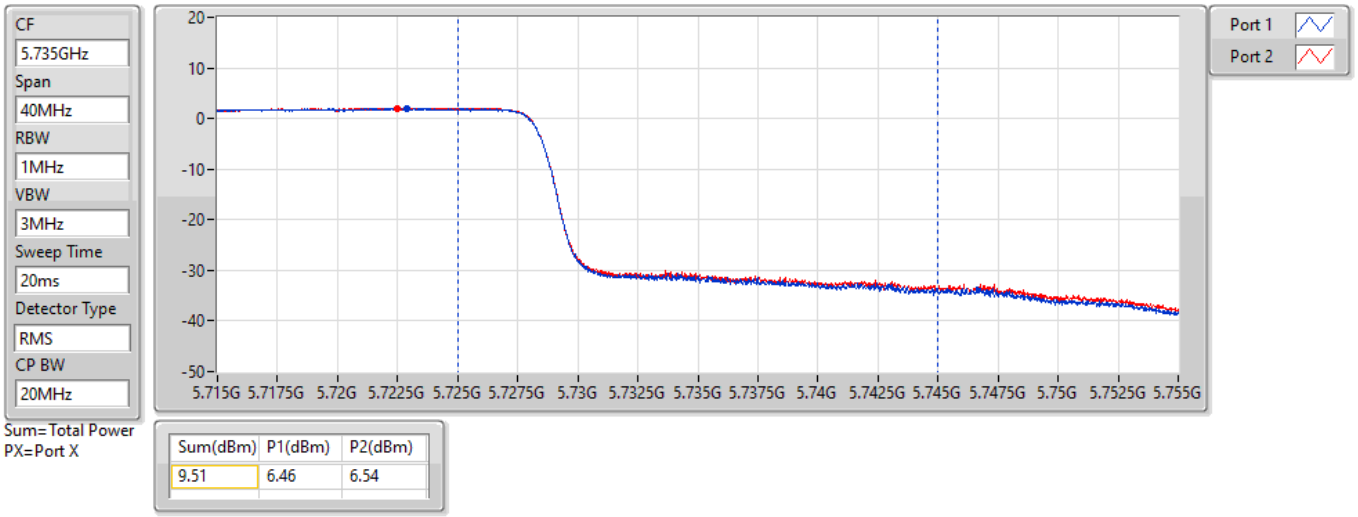


Sum(dBm)	P1(dBm)	P2(dBm)
9.51	6.46	6.54

802.11ac VHT80-BF_Nss1,(MCS0)_2TX AV Power

5690MHz Straddle 5.47-5.725GHz_TnomVnom

04/08/2022

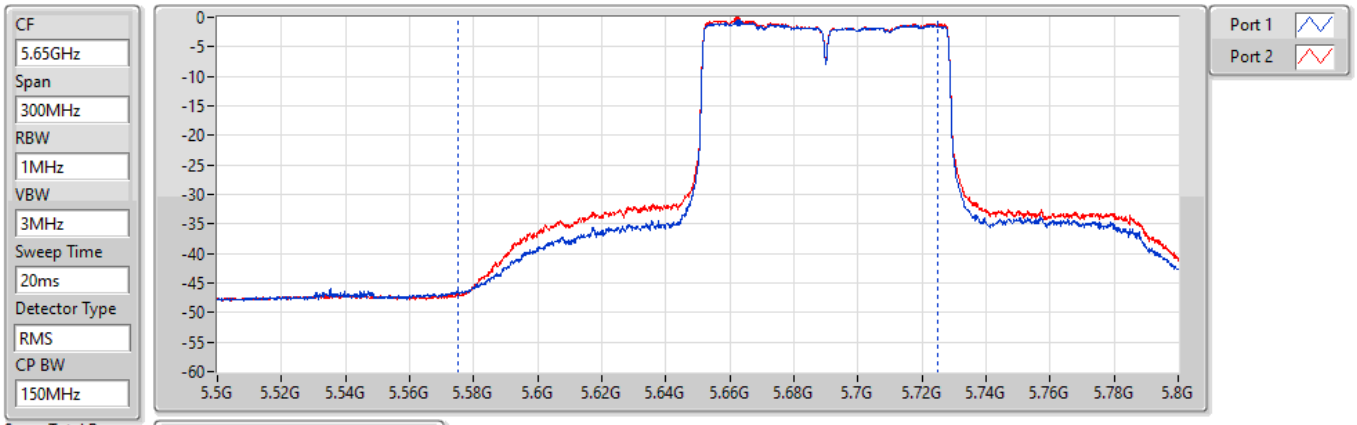


Sum(dBm)	P1(dBm)	P2(dBm)
19.73	16.62	16.81

802.11ac VHT80-BF_Nss1,(MCS0)_2TX AV Power

5690MHz Straddle 5.725-5.85GHz_TnomVnom

04/08/2022

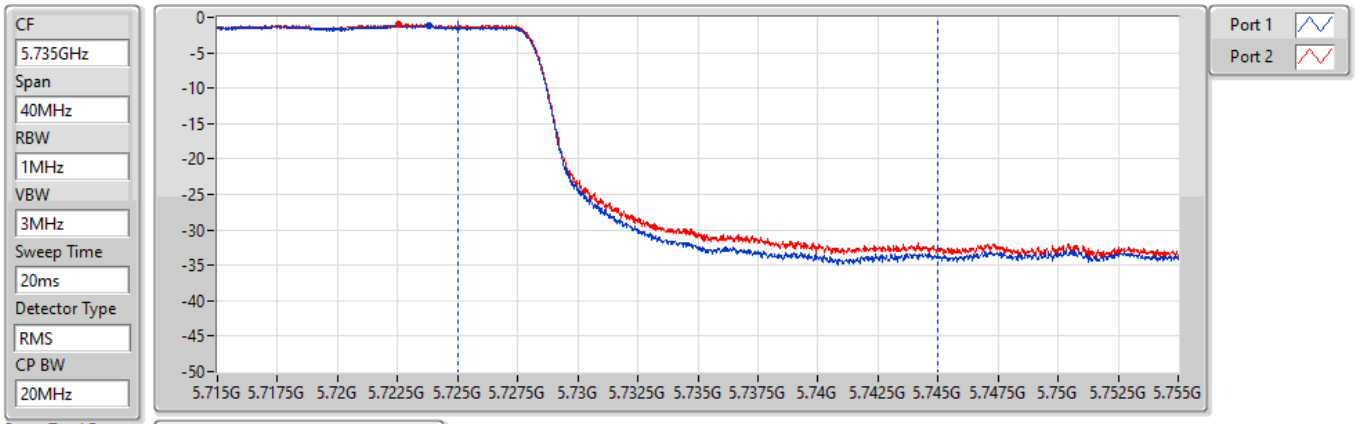


Sum(dBm)	P1(dBm)	P2(dBm)
6.41	3.27	3.53

802.11ac VHT160_Nss1,(MCS0)_2TX AV Power

5250MHz Straddle 5.15-5.25GHz_TnomVnom

21/05/2022

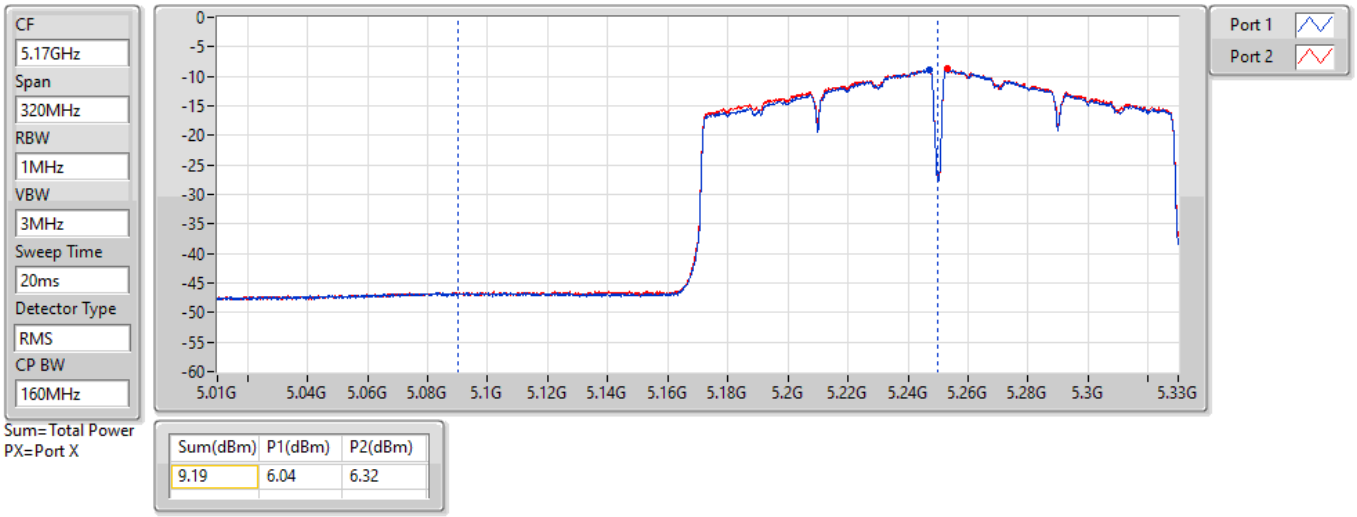


Sum(dBm)	P1(dBm)	P2(dBm)
9.19	6.04	6.32

802.11ac VHT160_Nss1,(MCS0)_2TX AV Power

5250MHz Straddle 5.25-5.35GHz_TnomVnom

21/05/2022

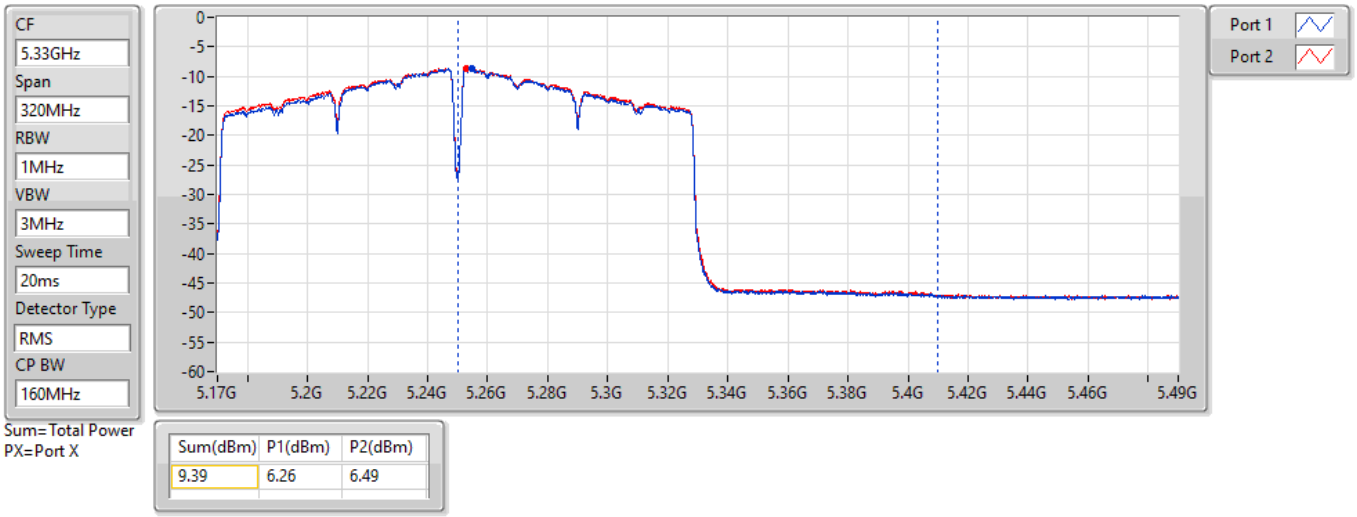


Sum(dBm)	P1(dBm)	P2(dBm)
9.39	6.26	6.49

802.11ax HEW20_Nss1,(MCS0)_2TX **AV Power**

5720MHz Straddle 5.47-5.725GHz_TnomVnom

20/05/2022

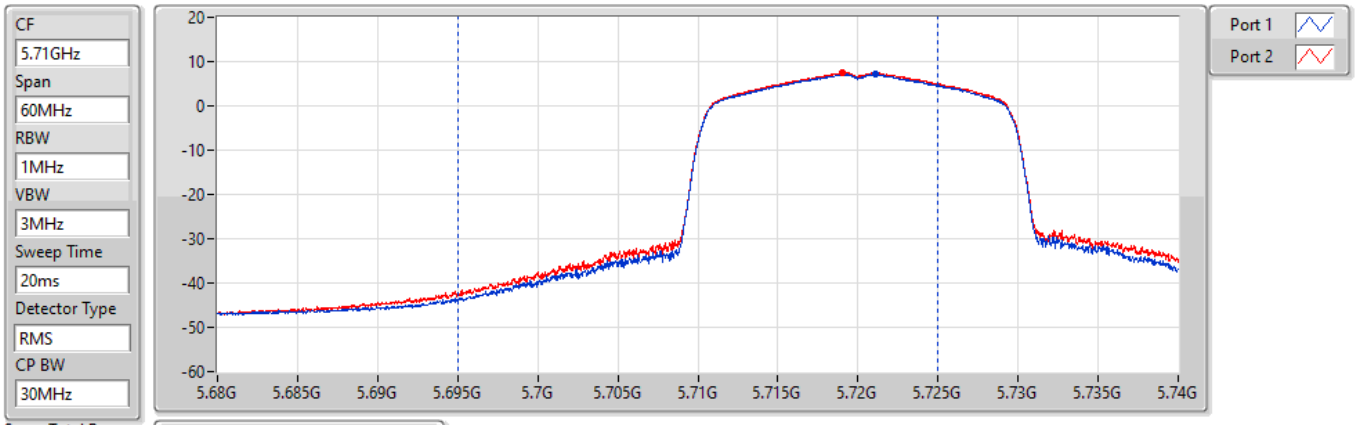


Sum(dBm)	P1(dBm)	P2(dBm)
19.78	16.59	16.95

802.11ax HEW20_Nss1,(MCS0)_2TX **AV Power**

5720MHz Straddle 5.725-5.85GHz_TnomVnom

20/05/2022

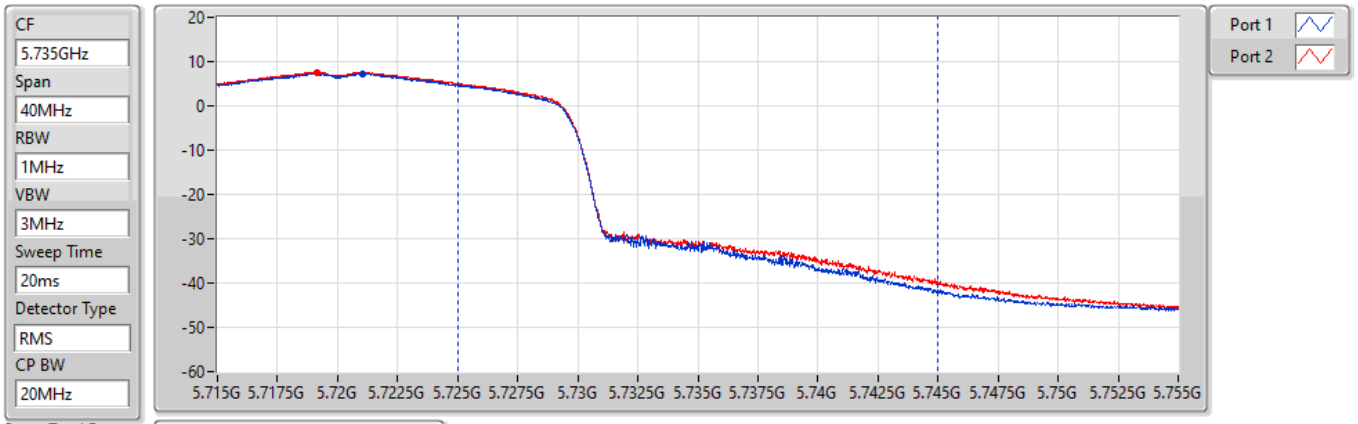


Sum(dBm)	P1(dBm)	P2(dBm)
12.44	9.24	9.62

802.11ax HEW40-BF_Nss1,(MCS0)_2TX **AV Power**

5710MHz Straddle 5.47-5.725GHz_TnomVnom

04/08/2022

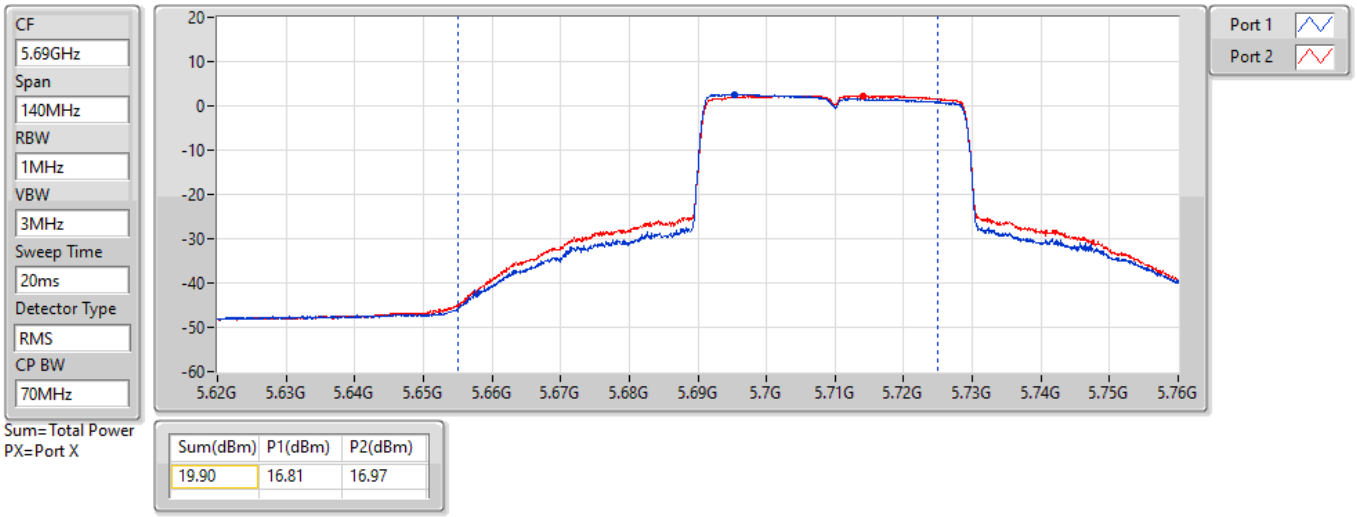


Sum(dBm)	P1(dBm)	P2(dBm)
19.90	16.81	16.97

802.11ax HEW40-BF_Nss1,(MCS0)_2TX **AV Power**

5710MHz Straddle 5.725-5.85GHz_TnomVnom

04/08/2022

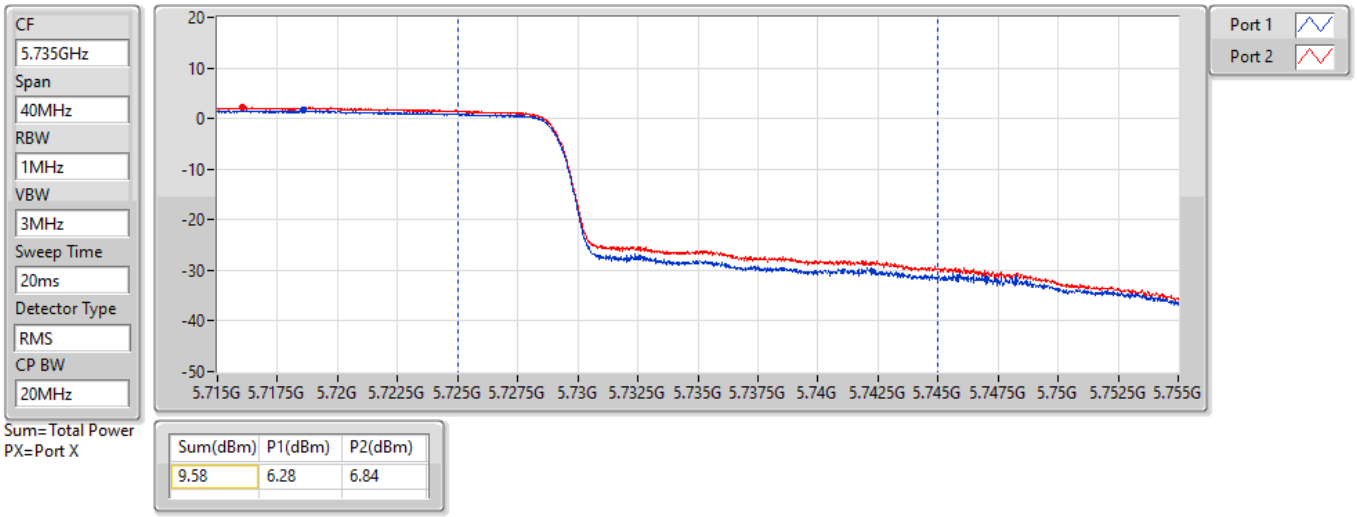


Sum(dBm)	P1(dBm)	P2(dBm)
9.58	6.28	6.84

802.11ax HEW80-BF_Nss1,(MCS0)_2TX AV Power

5690MHz Straddle 5.47-5.725GHz_TnomVnom

04/08/2022

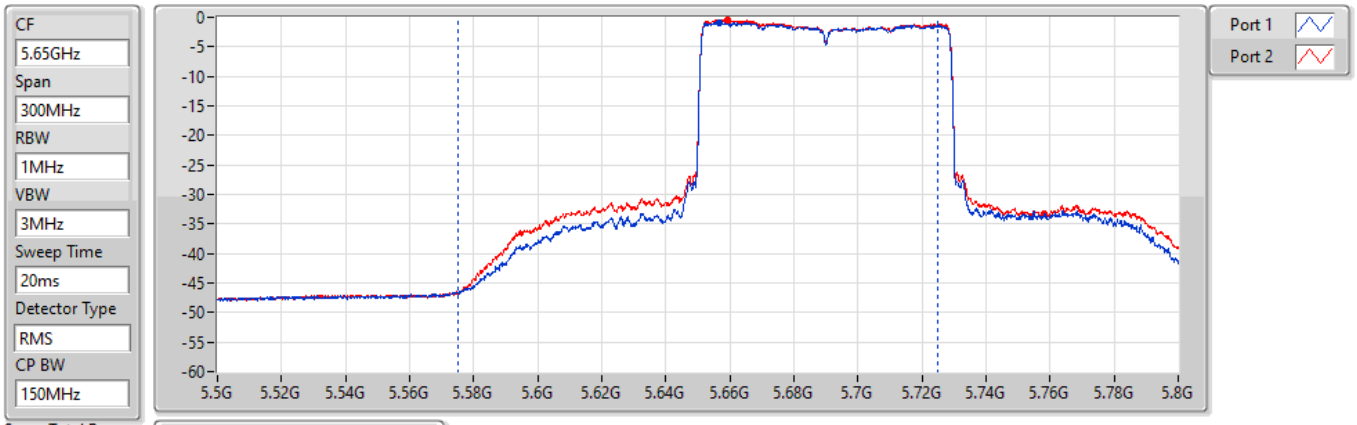


Sum(dBm)	P1(dBm)	P2(dBm)
19.81	16.68	16.91

802.11ax HEW80-BF_Nss1,(MCS0)_2TX AV Power

5690MHz Straddle 5.725-5.85GHz_TnomVnom


04/08/2022

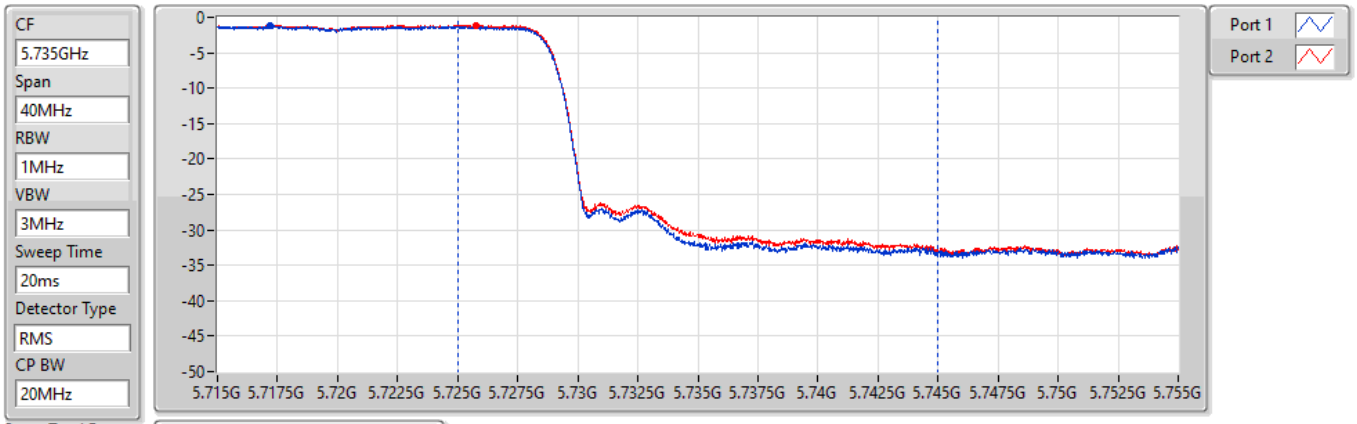

Sum(dBm)	P1(dBm)	P2(dBm)
7.12	3.99	4.23

802.11ax HEW160_Nss1,(MCS0)_2TX AV Power


5250MHz Straddle 5.15-5.25GHz_TnomVnom

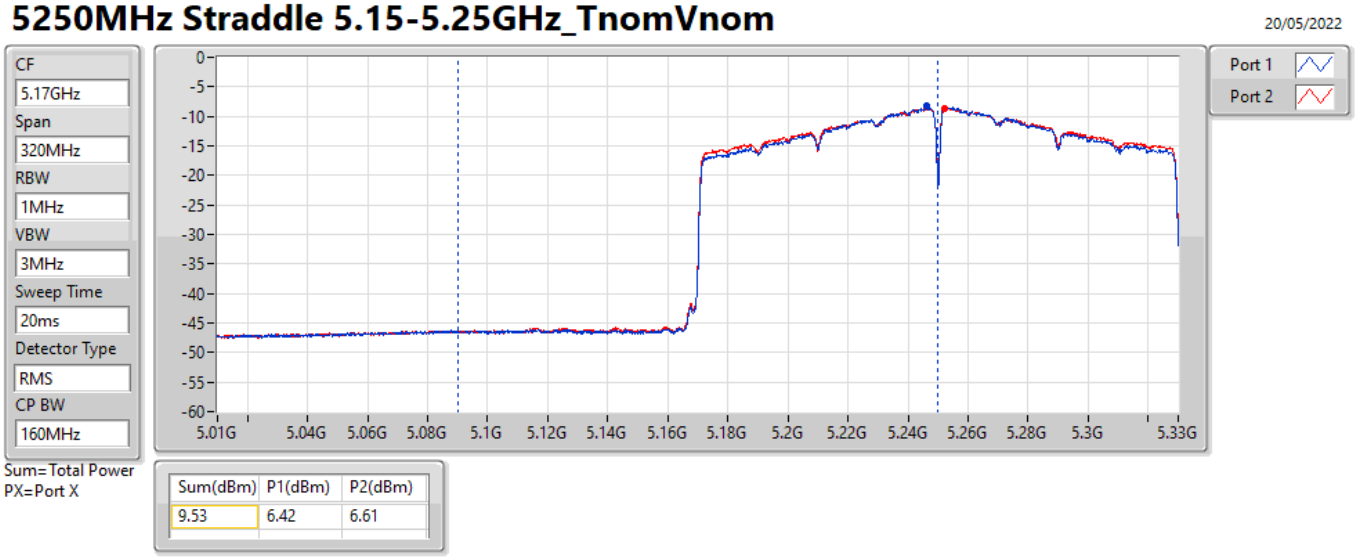

Sum(dBm)	P1(dBm)	P2(dBm)
9.53	6.42	6.61

802.11ax HEW160_Nss1,(MCS0)_2TX AV Power

5250MHz Straddle 5.25-5.35GHz_TnomVnom

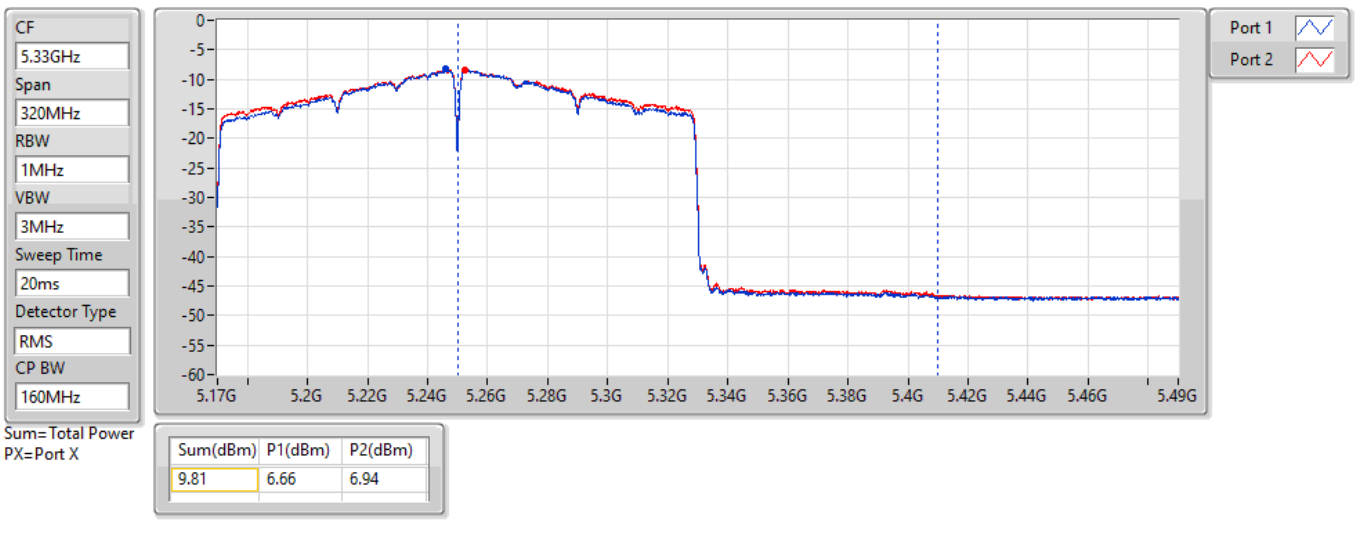

Sum(dBm)	P1(dBm)	P2(dBm)
9.81	6.66	6.94

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	14.47	0.02799	19.47	0.08851
5.25-5.35GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	14.61	0.02891	19.61	0.09141
5.47-5.725GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	14.90	0.03090	19.90	0.09772
5.725-5.85GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	17.75	0.05957	22.75	0.18836

Result


Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5180MHz	Pass	5.00	14.47	14.47	30.00	19.47
5200MHz	Pass	5.00	14.41	14.41	30.00	19.41
5240MHz	Pass	5.00	14.39	14.39	30.00	19.39
5260MHz	Pass	5.00	14.55	14.55	23.98	19.55
5300MHz	Pass	5.00	14.61	14.61	23.98	19.61
5320MHz	Pass	5.00	14.6	14.60	23.98	19.60
5500MHz	Pass	5.00	14.64	14.64	23.98	19.64
5580MHz	Pass	5.00	14.69	14.69	23.98	19.69
5700MHz	Pass	5.00	12.55	12.55	23.98	17.55
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	14.9	14.90	23.98	19.90
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	-12.12	-12.12	30.00	-7.12
5745MHz	Pass	5.00	17.75	17.75	30.00	22.75
5785MHz	Pass	5.00	16.6	16.60	30.00	21.60
5825MHz	Pass	5.00	16.59	16.59	30.00	21.59

DG = Directional Gain; Port X = Port X output power

802.11ax HEW20_Nss1,(MCS0)_1TX **AV Power**

5720MHz Straddle 5.47-5.725GHz_TnomVnom

21/05/2022

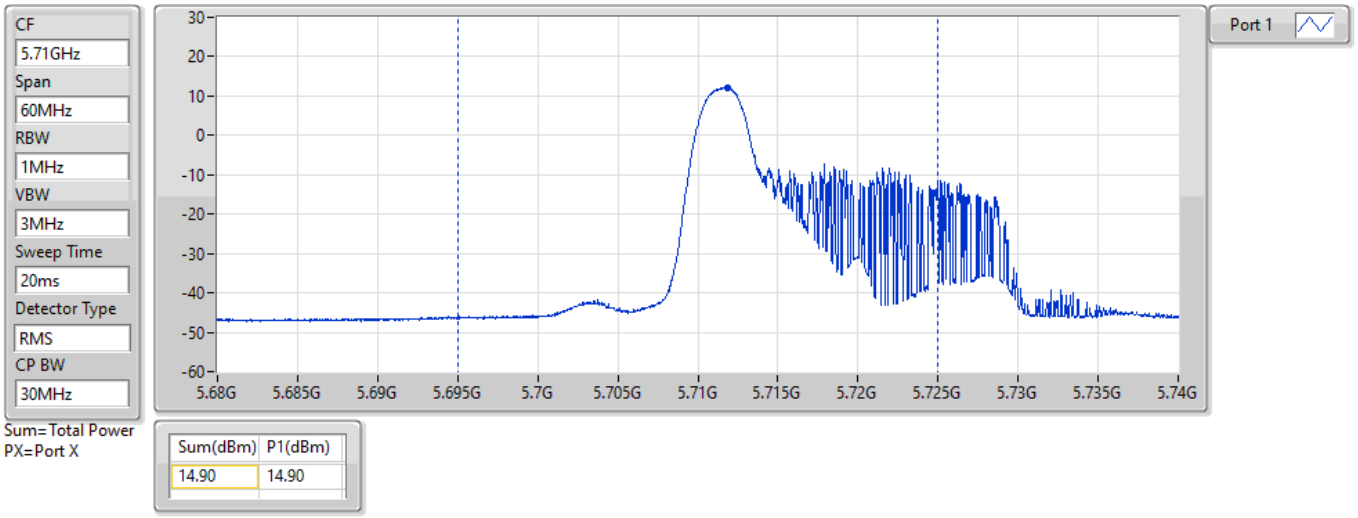


Sum(dBm)	P1(dBm)
14.90	14.90

802.11ax HEW20_Nss1,(MCS0)_1TX **AV Power**

5720MHz Straddle 5.725-5.85GHz_TnomVnom

21/05/2022

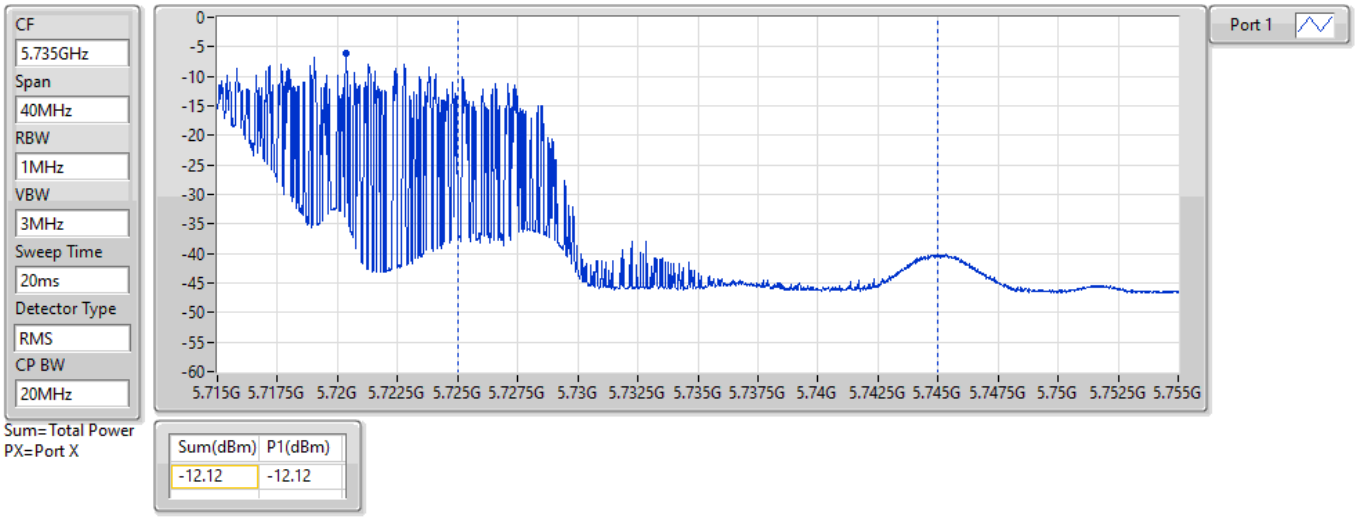

Sum(dBm)	P1(dBm)
-12.12	-12.12

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	12.52	0.01786	17.52	0.05649
5.25-5.35GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	12.35	0.01718	17.35	0.05433
5.47-5.725GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	13.10	0.02042	18.10	0.06457
5.725-5.85GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	20.05	0.10116	25.05	0.31989

Result


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5180MHz	Pass	5.00	9.25	9.39	12.33	23.98	17.33
5200MHz	Pass	5.00	9.46	9.56	12.52	23.98	17.52
5240MHz	Pass	5.00	9.26	9.31	12.30	23.98	17.30
5260MHz	Pass	5.00	9.24	9.44	12.35	23.84	17.35
5300MHz	Pass	5.00	8.87	9.16	12.03	23.85	17.03
5320MHz	Pass	5.00	9.14	9.52	12.34	23.84	17.34
5500MHz	Pass	5.00	9.49	9.61	12.56	23.83	17.56
5580MHz	Pass	5.00	9.68	9.71	12.71	23.83	17.71
5700MHz	Pass	5.00	9.16	9.43	12.31	23.83	17.31
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	9.93	10.24	13.10	22.80	18.10
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	-16.30	-16.39	-13.33	30.00	-8.33
5745MHz	Pass	5.00	16.90	17.18	20.05	30.00	25.05
5785MHz	Pass	5.00	15.86	16.14	19.01	30.00	24.01
5825MHz	Pass	5.00	15.44	15.89	18.68	30.00	23.68

DG = Directional Gain; Port X = Port X output power

802.11ax HEW20_Nss1,(MCS0)_2TX **AV Power**

5720MHz Straddle 5.47-5.725GHz_TnomVnom

21/05/2022

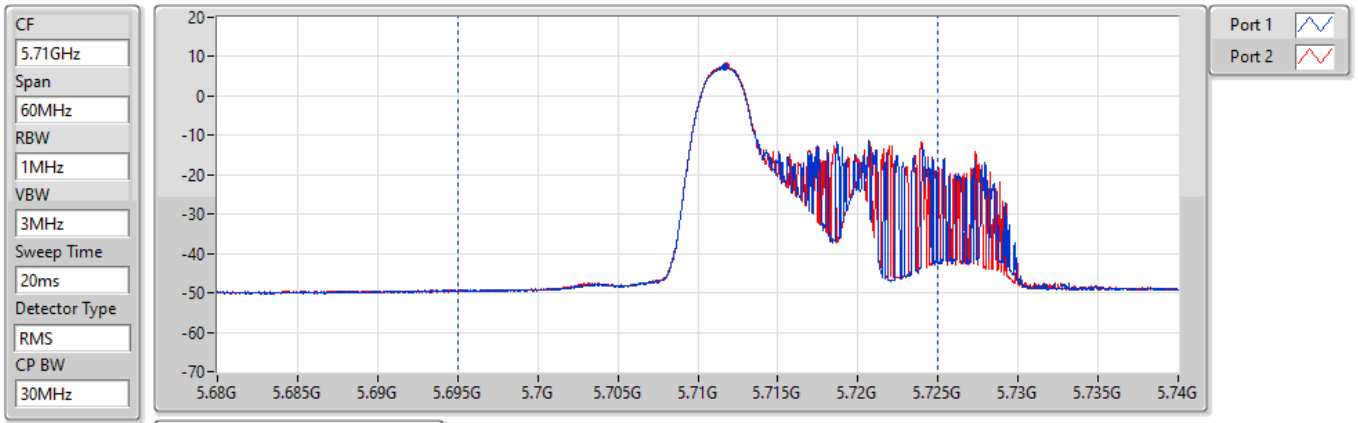


Sum(dBm)	P1(dBm)	P2(dBm)
13.10	9.93	10.24

802.11ax HEW20_Nss1,(MCS0)_2TX **AV Power**

5720MHz Straddle 5.725-5.85GHz_TnomVnom

21/05/2022

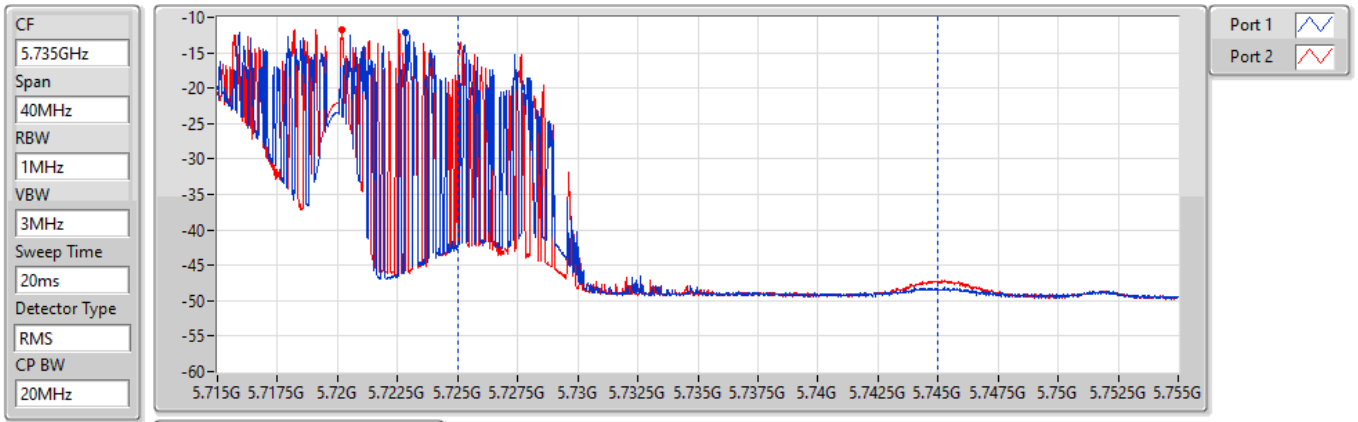

Sum(dBm)	P1(dBm)	P2(dBm)
-13.33	-16.30	-16.39

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	17.52	0.05649	22.52	0.17865
5.25-5.35GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	17.38	0.05470	22.38	0.17298
5.47-5.725GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	18.05	0.06383	23.05	0.20184
5.725-5.85GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	20.57	0.11402	25.57	0.36058


Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5180MHz	Pass	5.00	17.28	17.28	23.98	22.28
5200MHz	Pass	5.00	17.38	17.38	23.98	22.38
5240MHz	Pass	5.00	17.52	17.52	23.98	22.52
5260MHz	Pass	5.00	17.38	17.38	23.83	22.38
5300MHz	Pass	5.00	17.14	17.14	23.83	22.14
5320MHz	Pass	5.00	17.33	17.33	23.83	22.33
5500MHz	Pass	5.00	17.39	17.39	23.81	22.39
5580MHz	Pass	5.00	17.61	17.61	23.81	22.61
5700MHz	Pass	5.00	15.51	15.51	23.83	20.51
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	18.05	18.05	22.74	23.05
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	4.07	4.07	30.00	9.07
5745MHz	Pass	5.00	20.57	20.57	30.00	25.57
5785MHz	Pass	5.00	18.95	18.95	30.00	23.95
5825MHz	Pass	5.00	19.07	19.07	30.00	24.07

DG = Directional Gain; Port X = Port X output power


802.11ax HEW20_Nss1,(MCS0)_1TX AV Power

5720MHz Straddle 5.47-5.725GHz_TnomVnom

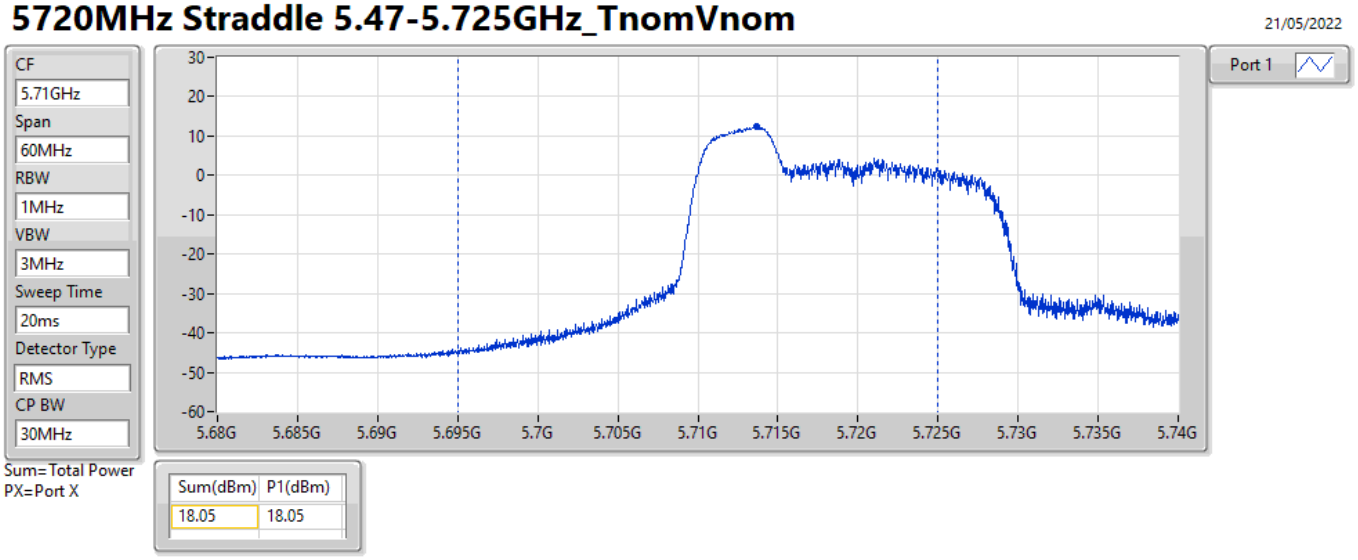

802.11ax HEW20_Nss1,(MCS0)_1TX AV Power

5720MHz Straddle 5.725-5.85GHz_TnomVnom

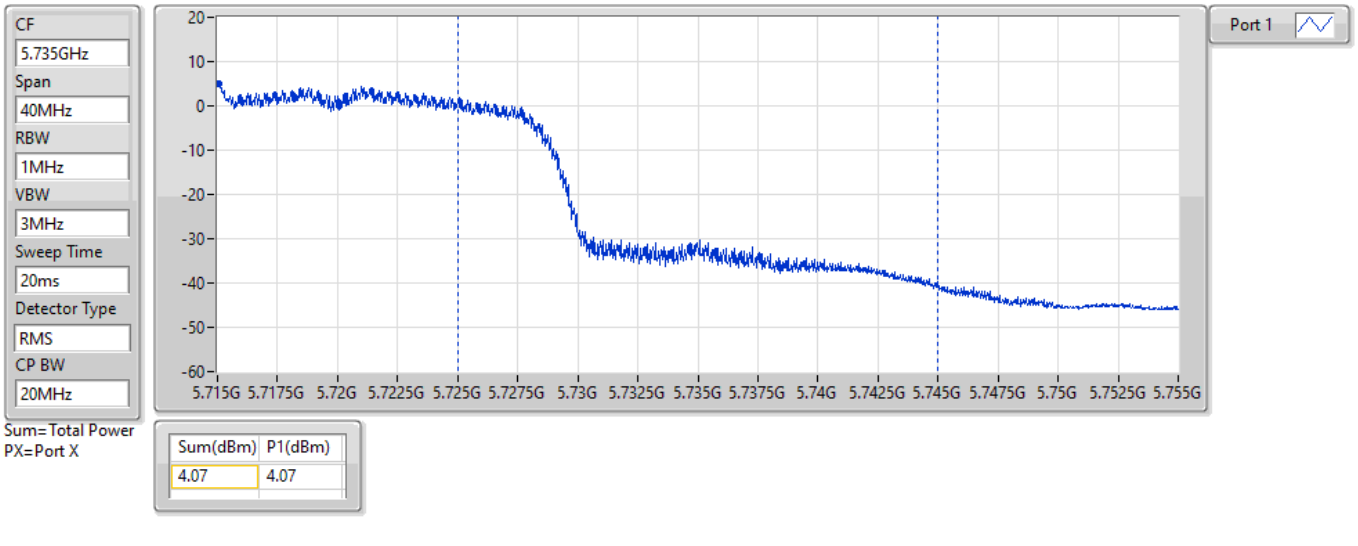

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	16.09	0.04064	21.09	0.12853
5.25-5.35GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	15.74	0.03750	20.74	0.11858
5.47-5.725GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	15.97	0.03954	20.97	0.12503
5.725-5.85GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	22.88	0.19409	27.88	0.61376

Result


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5180MHz	Pass	5.00	12.61	13.00	15.82	23.98	20.82
5200MHz	Pass	5.00	12.78	12.84	15.82	23.98	20.82
5240MHz	Pass	5.00	12.90	13.25	16.09	23.98	21.09
5260MHz	Pass	5.00	12.53	12.70	15.63	23.82	20.63
5300MHz	Pass	5.00	12.56	12.69	15.64	23.83	20.64
5320MHz	Pass	5.00	12.58	12.87	15.74	23.81	20.74
5500MHz	Pass	5.00	12.85	12.92	15.90	23.78	20.90
5580MHz	Pass	5.00	12.75	12.85	15.81	23.78	20.81
5700MHz	Pass	5.00	11.22	11.23	14.24	23.83	19.24
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	12.80	13.11	15.97	22.74	20.97
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	-1.29	-1.51	1.61	30.00	6.61
5745MHz	Pass	5.00	19.73	20.01	22.88	30.00	27.88
5785MHz	Pass	5.00	19.81	19.92	22.88	30.00	27.88
5825MHz	Pass	5.00	19.82	19.77	22.81	30.00	27.81

DG = Directional Gain; Port X = Port X output power

802.11ax HEW20_Nss1,(MCS0)_2TX AV Power

5720MHz Straddle 5.47-5.725GHz_TnomVnom

21/05/2022

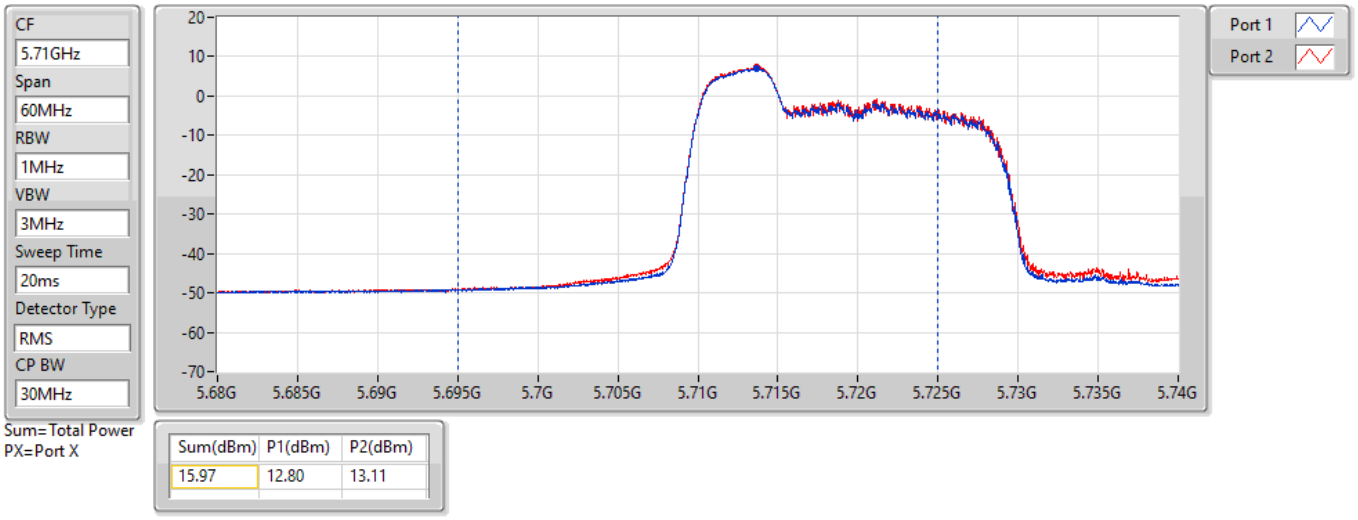


Sum(dBm)	P1(dBm)	P2(dBm)
15.97	12.80	13.11

802.11ax HEW20_Nss1,(MCS0)_2TX AV Power

5720MHz Straddle 5.725-5.85GHz_TnomVnom

21/05/2022

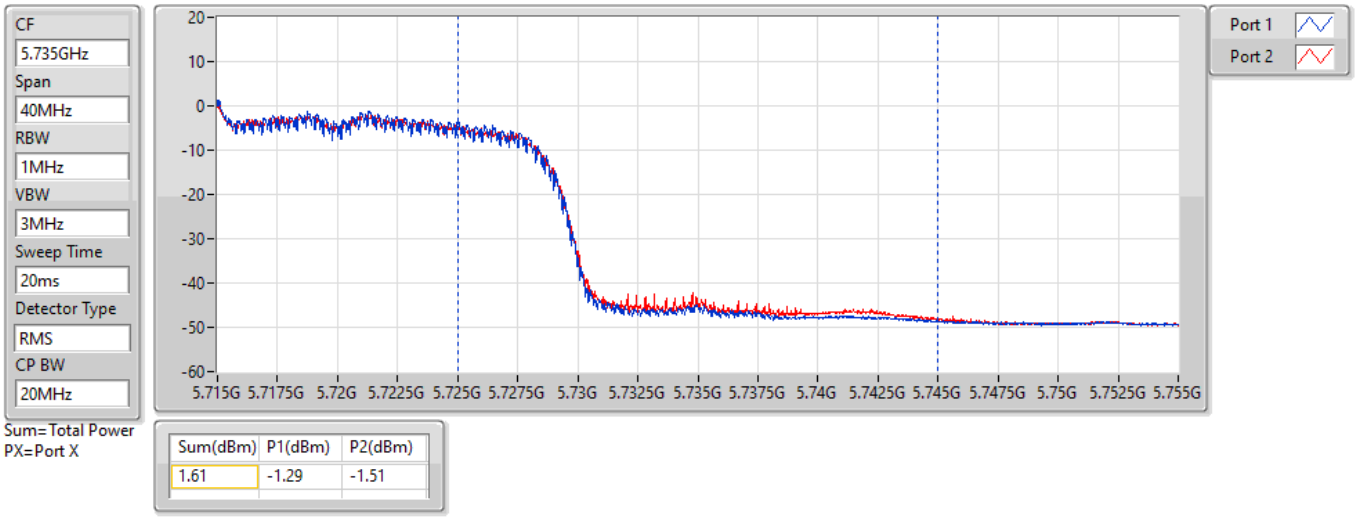

Sum(dBm)	P1(dBm)	P2(dBm)
1.61	-1.29	-1.51

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	18.85	0.07674	23.85	0.24266
5.25-5.35GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	18.86	0.07691	23.86	0.24322
5.47-5.725GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	19.36	0.08630	24.36	0.27290
5.725-5.85GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	22.41	0.17418	27.41	0.55081

Result


Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-	-
5180MHz	Pass	5.00	18.85	18.85	23.98	23.85
5200MHz	Pass	5.00	17.97	17.97	23.98	22.97
5240MHz	Pass	5.00	18.83	18.83	23.98	23.83
5260MHz	Pass	5.00	18.86	18.86	23.98	23.86
5300MHz	Pass	5.00	18.82	18.82	23.98	23.82
5320MHz	Pass	5.00	18.75	18.75	23.98	23.75
5500MHz	Pass	5.00	18.83	18.83	23.81	23.83
5580MHz	Pass	5.00	19.09	19.09	23.82	24.09
5700MHz	Pass	5.00	17.43	17.43	23.83	22.43
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	19.36	19.36	22.71	24.36
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	4.03	4.03	30.00	9.03
5745MHz	Pass	5.00	22.41	22.41	30.00	27.41
5785MHz	Pass	5.00	20.88	20.88	30.00	25.88
5825MHz	Pass	5.00	21.63	21.63	30.00	26.63

DG = Directional Gain; Port X = Port X output power

802.11ax HEW20_Nss1,(MCS0)_1TX **AV Power**

5720MHz Straddle 5.47-5.725GHz_TnomVnom

22/05/2022

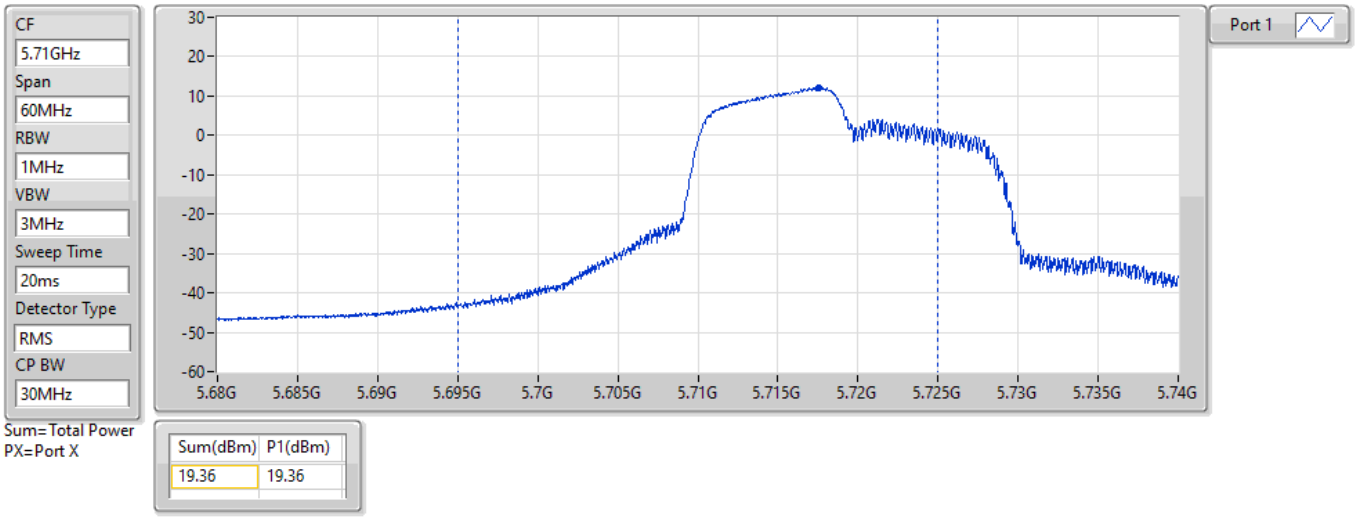


Sum(dBm)	P1(dBm)
19.36	19.36

802.11ax HEW20_Nss1,(MCS0)_1TX **AV Power**

5720MHz Straddle 5.725-5.85GHz_TnomVnom

22/05/2022

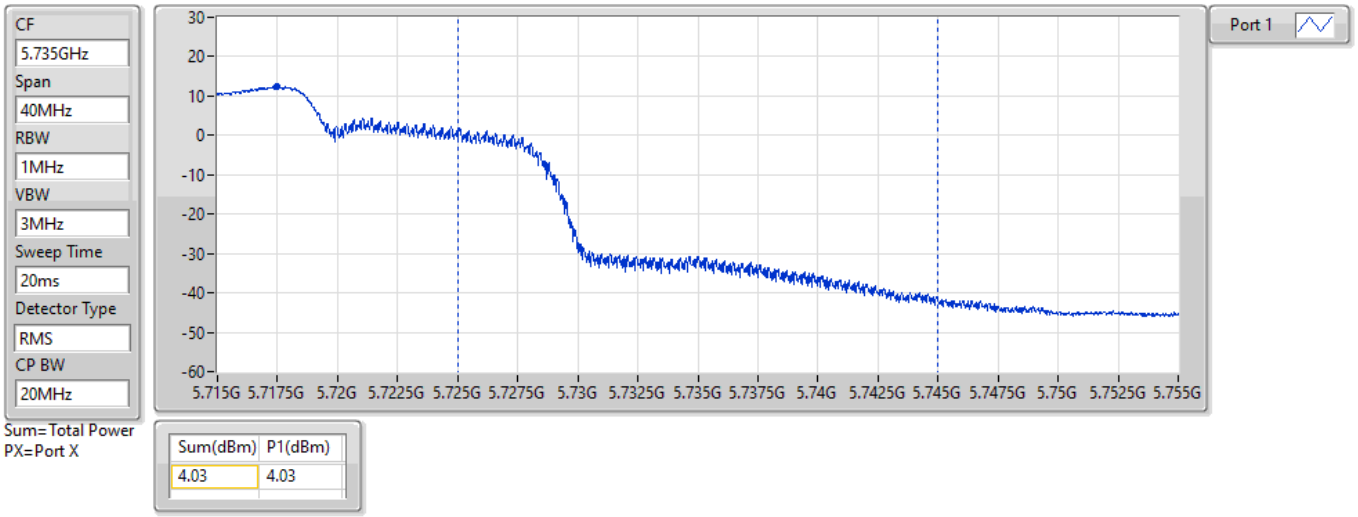

Sum(dBm)	P1(dBm)
4.03	4.03

Summary

Mode	Total Power (dBm)	Total Power (W)	EIRP (dBm)	EIRP (W)
5.15-5.25GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	17.32	0.05395	22.32	0.17061
5.25-5.35GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	17.20	0.05248	22.20	0.16596
5.47-5.725GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	17.59	0.05741	22.59	0.18155
5.725-5.85GHz	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	22.96	0.19770	27.96	0.62517

Result


Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-
5180MHz	Pass	5.00	14.10	14.24	17.18	23.98	22.18
5200MHz	Pass	5.00	14.13	14.46	17.31	23.98	22.31
5240MHz	Pass	5.00	14.21	14.40	17.32	23.98	22.32
5260MHz	Pass	5.00	14.08	14.30	17.20	23.82	22.20
5300MHz	Pass	5.00	13.94	13.95	16.96	23.80	21.96
5320MHz	Pass	5.00	13.88	13.94	16.92	23.79	21.92
5500MHz	Pass	5.00	14.11	14.57	17.36	23.77	22.36
5580MHz	Pass	5.00	14.28	14.55	17.43	23.79	22.43
5700MHz	Pass	5.00	13.60	13.86	16.74	23.78	21.74
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	14.42	14.73	17.59	22.71	22.59
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	-0.97	-1.08	1.99	30.00	6.99
5745MHz	Pass	5.00	19.83	20.06	22.96	30.00	27.96
5785MHz	Pass	5.00	19.91	19.88	22.91	30.00	27.91
5825MHz	Pass	5.00	19.88	19.93	22.92	30.00	27.92

DG = Directional Gain; Port X = Port X output power

802.11ax HEW20_Nss1,(MCS0)_2TX AV Power

5720MHz Straddle 5.47-5.725GHz_TnomVnom

21/05/2022

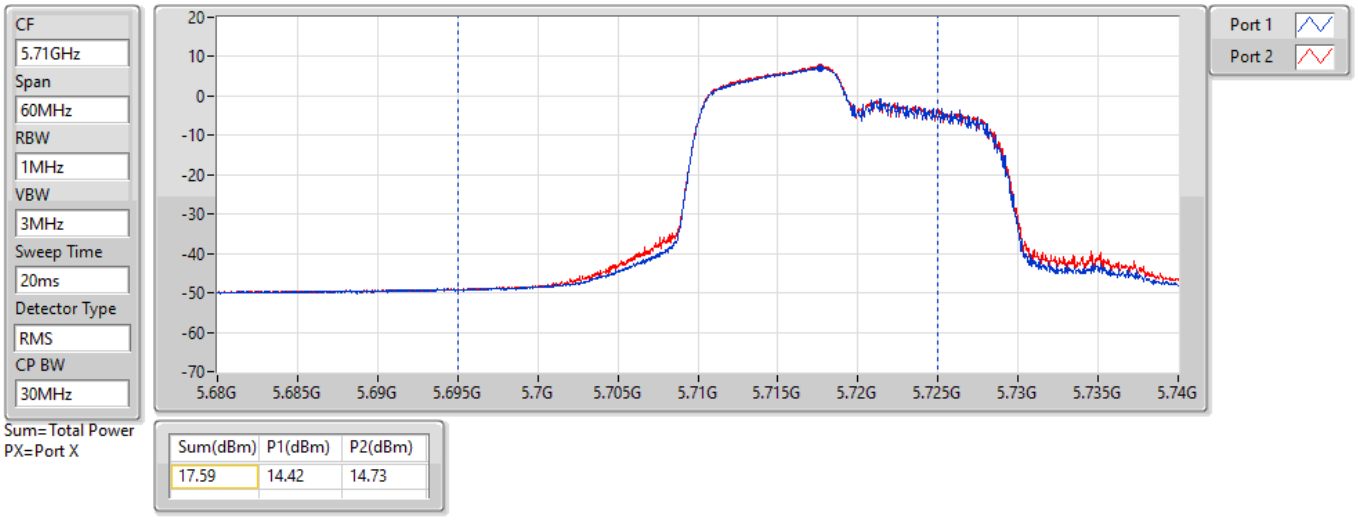


Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)
17.59	14.42	14.73

802.11ax HEW20_Nss1,(MCS0)_2TX AV Power

5720MHz Straddle 5.725-5.85GHz_TnomVnom

21/05/2022

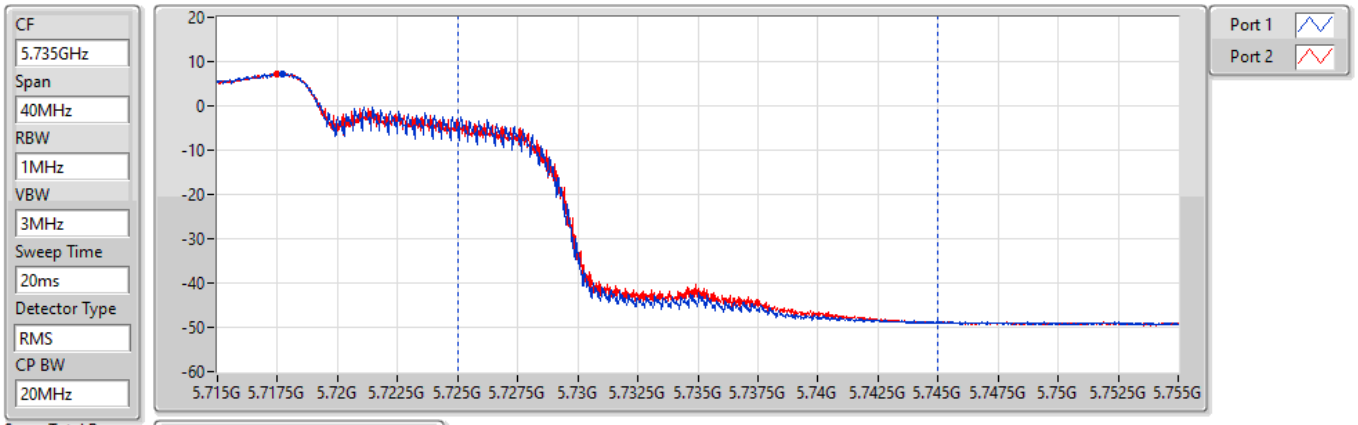

Sum=Total Power
PX=Port X

Sum(dBm)	P1(dBm)	P2(dBm)
1.99	-0.97	-1.08

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_1TX	10.95
802.11ax HEW20_Nss1,(MCS0)_1TX	10.90
802.11ax HEW40_Nss1,(MCS0)_1TX	6.66
802.11ax HEW80_Nss1,(MCS0)_1TX	0.04
802.11ax HEW160_Nss1,(MCS0)_1TX	-6.87
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_1TX	10.83
802.11ax HEW20_Nss1,(MCS0)_1TX	10.35
802.11ax HEW40_Nss1,(MCS0)_1TX	6.85
802.11ax HEW80_Nss1,(MCS0)_1TX	-1.06
802.11ax HEW160_Nss1,(MCS0)_1TX	-6.71
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_1TX	10.93
802.11ax HEW20_Nss1,(MCS0)_1TX	10.76
802.11ax HEW40_Nss1,(MCS0)_1TX	7.24
802.11ax HEW80_Nss1,(MCS0)_1TX	3.36
802.11ax HEW160_Nss1,(MCS0)_1TX	-7.00
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_1TX	9.96
802.11ax HEW20_Nss1,(MCS0)_1TX	9.65
802.11ax HEW40_Nss1,(MCS0)_1TX	5.96
802.11ax HEW80_Nss1,(MCS0)_1TX	1.58

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	4.86	10.92	10.92	11.00
5200MHz	Pass	4.86	10.95	10.95	11.00
5240MHz	Pass	4.86	10.60	10.60	11.00
5260MHz	Pass	4.86	10.57	10.57	11.00
5300MHz	Pass	4.86	10.83	10.83	11.00
5320MHz	Pass	4.86	9.25	9.25	11.00
5500MHz	Pass	4.86	9.51	9.51	11.00
5580MHz	Pass	4.86	10.77	10.77	11.00
5700MHz	Pass	4.86	6.62	6.62	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.86	10.93	10.93	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.86	6.83	6.83	30.00
5745MHz	Pass	4.86	9.96	9.96	30.00
5785MHz	Pass	4.86	9.93	9.93	30.00
5825MHz	Pass	4.86	9.88	9.88	30.00
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	4.86	10.87	10.87	11.00
5200MHz	Pass	4.86	10.90	10.90	11.00
5240MHz	Pass	4.86	10.28	10.28	11.00
5260MHz	Pass	4.86	10.31	10.31	11.00
5300MHz	Pass	4.86	10.35	10.35	11.00
5320MHz	Pass	4.86	8.77	8.77	11.00
5500MHz	Pass	4.86	8.23	8.23	11.00
5580MHz	Pass	4.86	10.45	10.45	11.00
5700MHz	Pass	4.86	4.63	4.63	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.86	10.76	10.76	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.86	6.73	6.73	30.00
5745MHz	Pass	4.86	9.65	9.65	30.00
5785MHz	Pass	4.86	9.56	9.56	30.00
5825MHz	Pass	4.86	9.42	9.42	30.00
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	4.86	4.76	4.76	11.00
5230MHz	Pass	4.86	6.66	6.66	11.00
5270MHz	Pass	4.86	6.85	6.85	11.00
5310MHz	Pass	4.86	4.18	4.18	11.00
5510MHz	Pass	4.86	4.48	4.48	11.00
5550MHz	Pass	4.86	7.24	7.24	11.00
5670MHz	Pass	4.86	4.03	4.03	11.00
5710MHz Straddle 5.47-5.725GHz	Pass	4.86	7.07	7.07	11.00
5710MHz Straddle 5.725-5.85GHz	Pass	4.86	1.00	1.00	30.00
5755MHz	Pass	4.86	5.55	5.55	30.00
5795MHz	Pass	4.86	5.96	5.96	30.00
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	4.86	0.04	0.04	11.00
5290MHz	Pass	4.86	-1.06	-1.06	11.00
5530MHz	Pass	4.86	0.68	0.68	11.00
5610MHz	Pass	4.86	0.80	0.80	11.00
5690MHz Straddle 5.47-5.725GHz	Pass	4.86	3.36	3.36	11.00
5690MHz Straddle 5.725-5.85GHz	Pass	4.86	-3.04	-3.04	30.00
5775MHz	Pass	4.86	1.58	1.58	30.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	4.86	-6.87	-6.87	11.00
5250MHz Straddle 5.25-5.35GHz	Pass	4.86	-6.71	-6.71	11.00
5570MHz	Pass	4.86	-7.00	-7.00	11.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11a_Nss1,(6Mbps)_1TX PSD


5180MHz

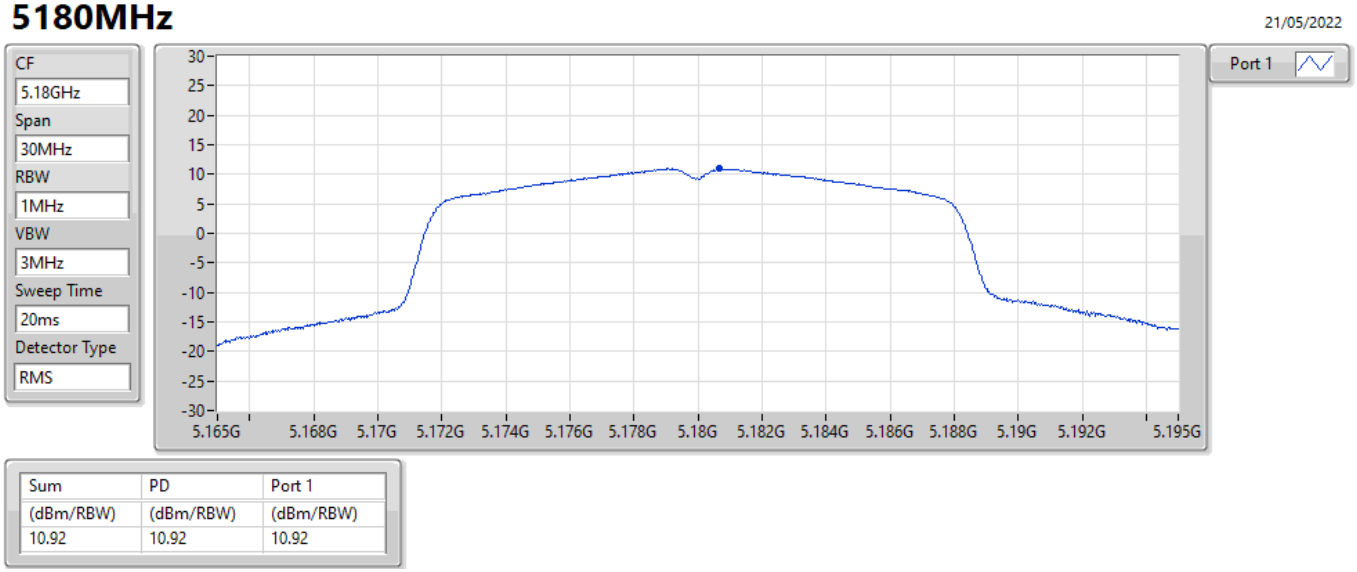

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.92	10.92	10.92

802.11a_Nss1,(6Mbps)_1TX PSD


5200MHz

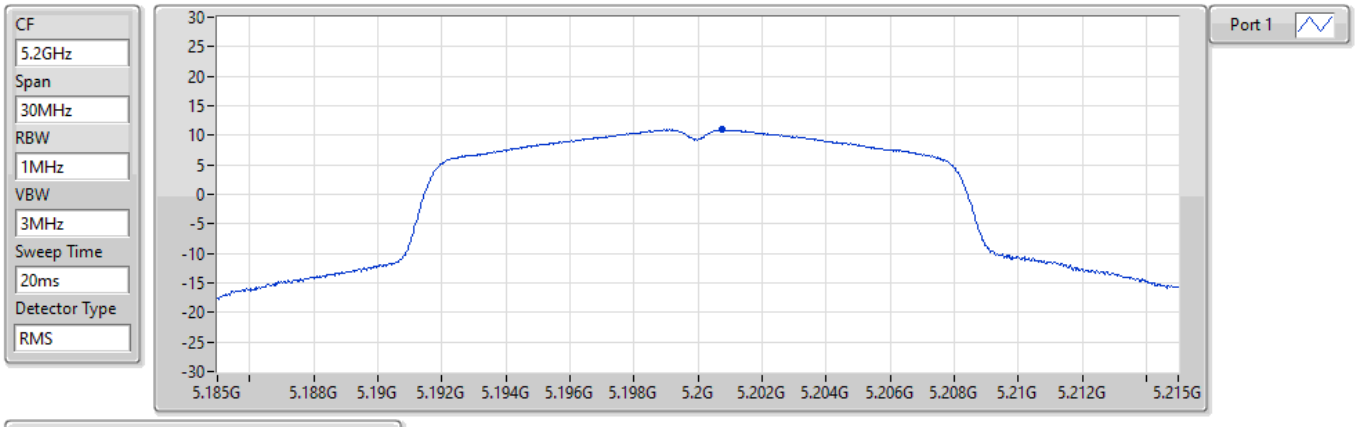

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.95	10.95	10.95

802.11a_Nss1,(6Mbps)_1TX PSD


5240MHz

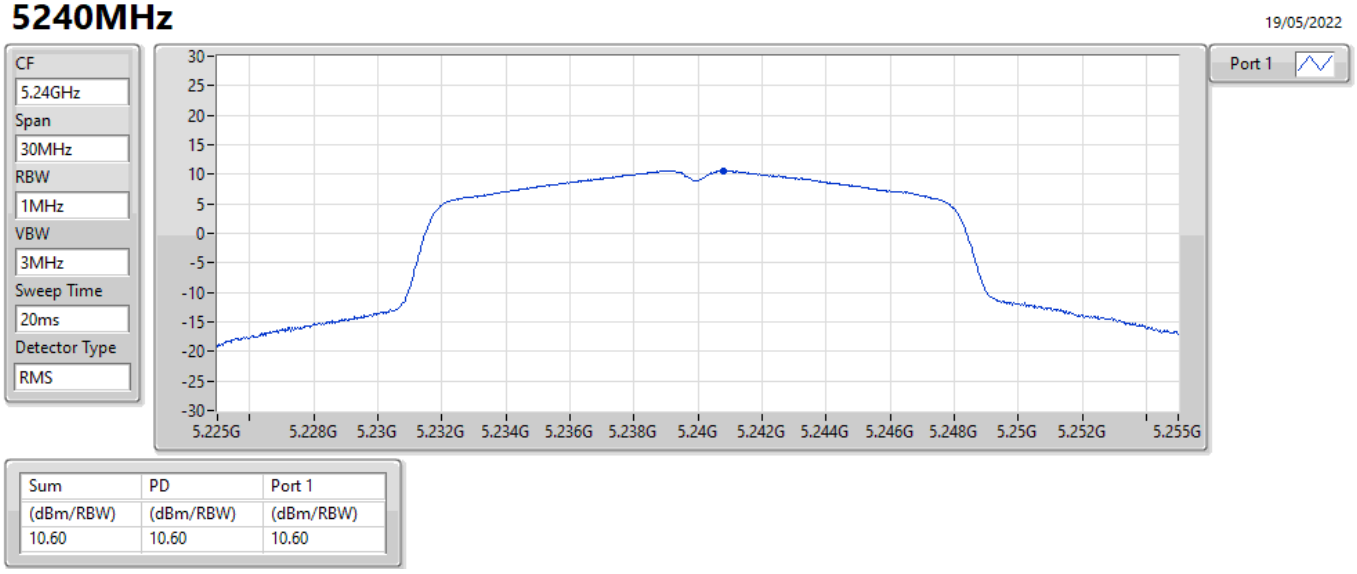

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.60	10.60	10.60

802.11a_Nss1,(6Mbps)_1TX PSD


5260MHz

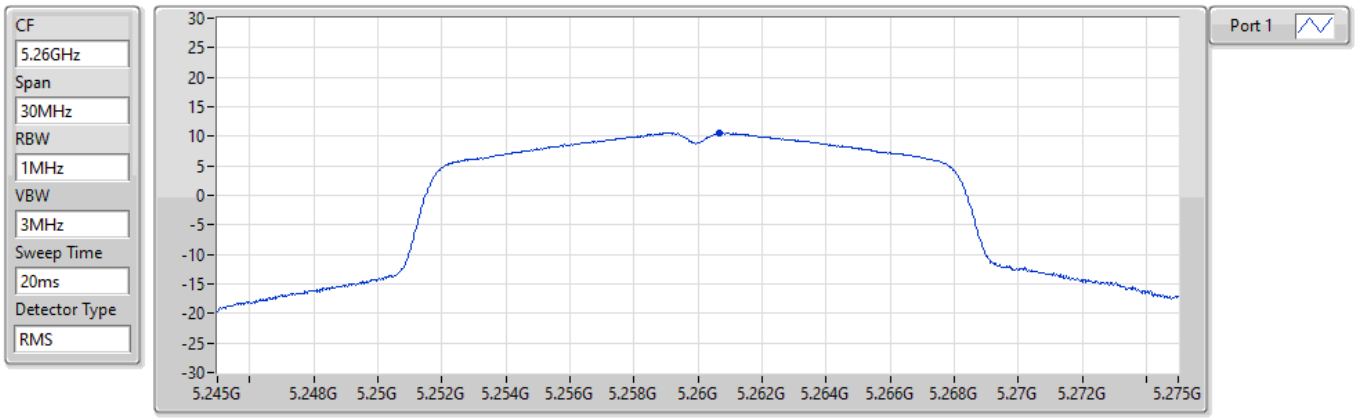

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.57	10.57	10.57

802.11a_Nss1,(6Mbps)_1TX PSD


5300MHz

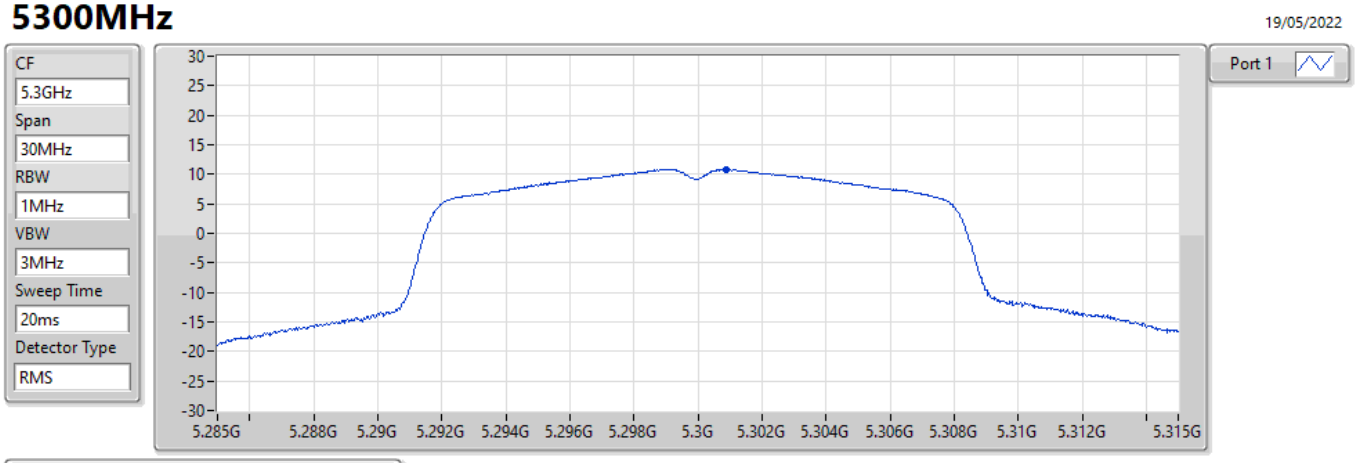

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.83	10.83	10.83

802.11a_Nss1,(6Mbps)_1TX PSD


5320MHz

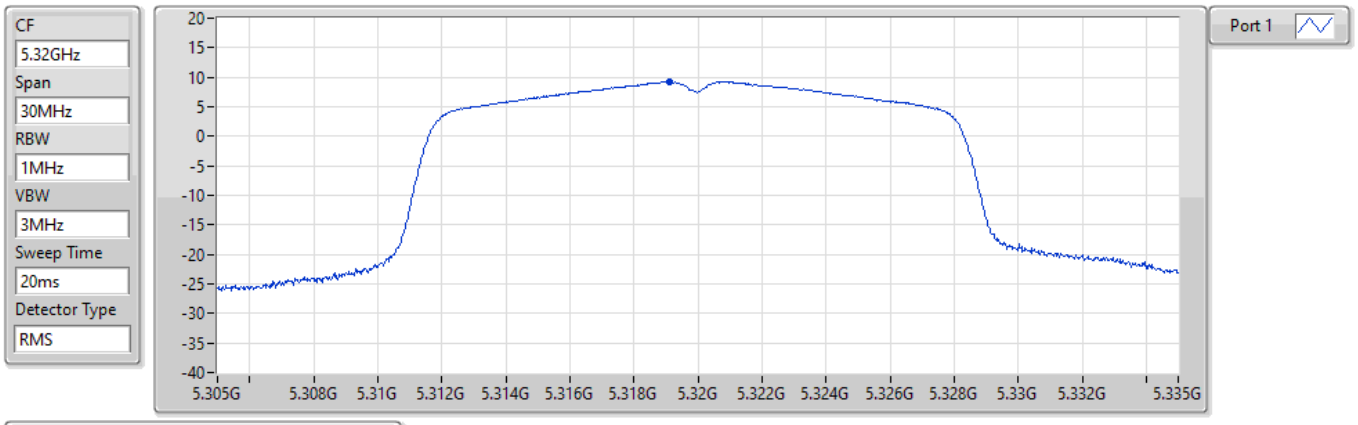

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.25	9.25	9.25

802.11a_Nss1,(6Mbps)_1TX PSD


5500MHz

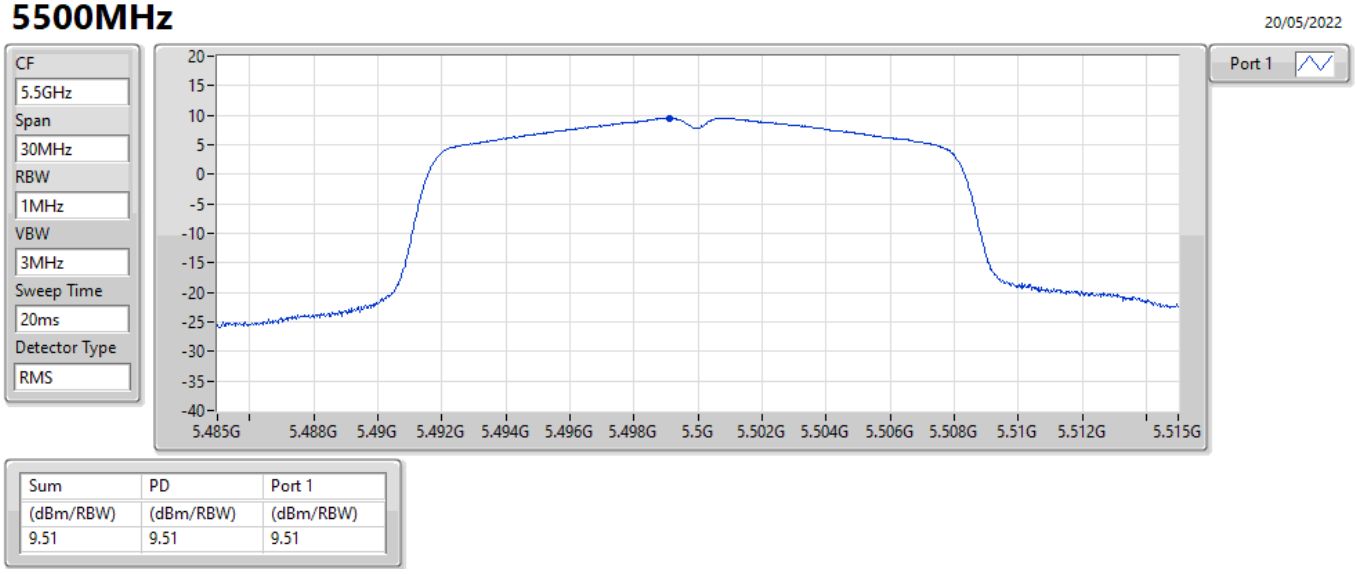

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.51	9.51	9.51

802.11a_Nss1,(6Mbps)_1TX PSD


5580MHz

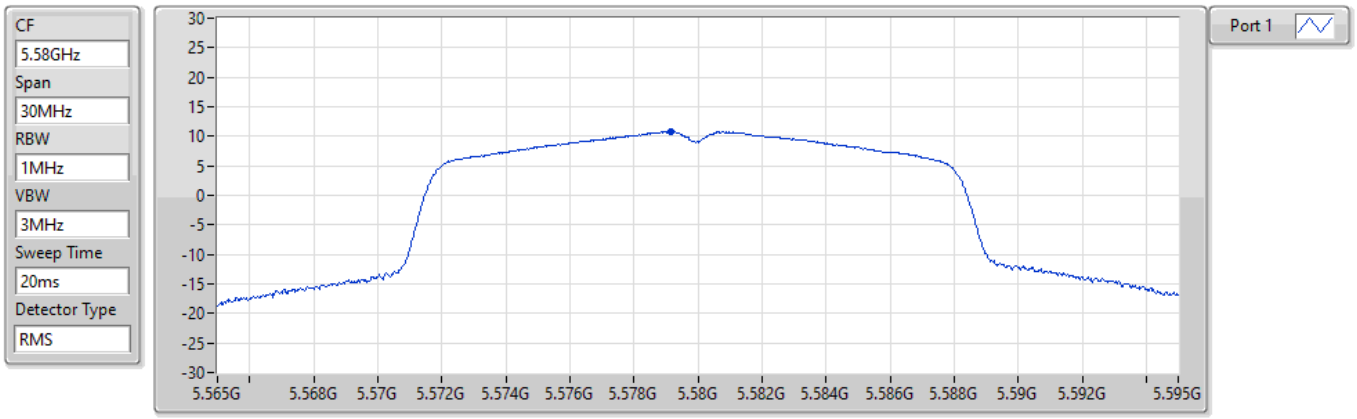

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.77	10.77	10.77

802.11a_Nss1,(6Mbps)_1TX PSD


5700MHz

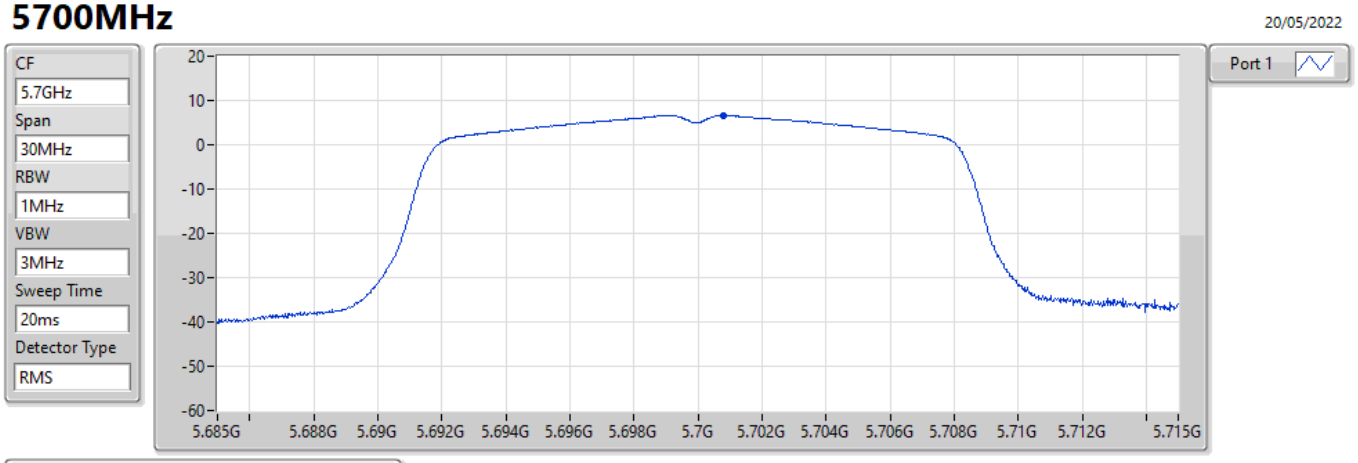

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.62	6.62	6.62

802.11a_Nss1,(6Mbps)_1TX PSD


5720MHz Straddle 5.47-5.725GHz

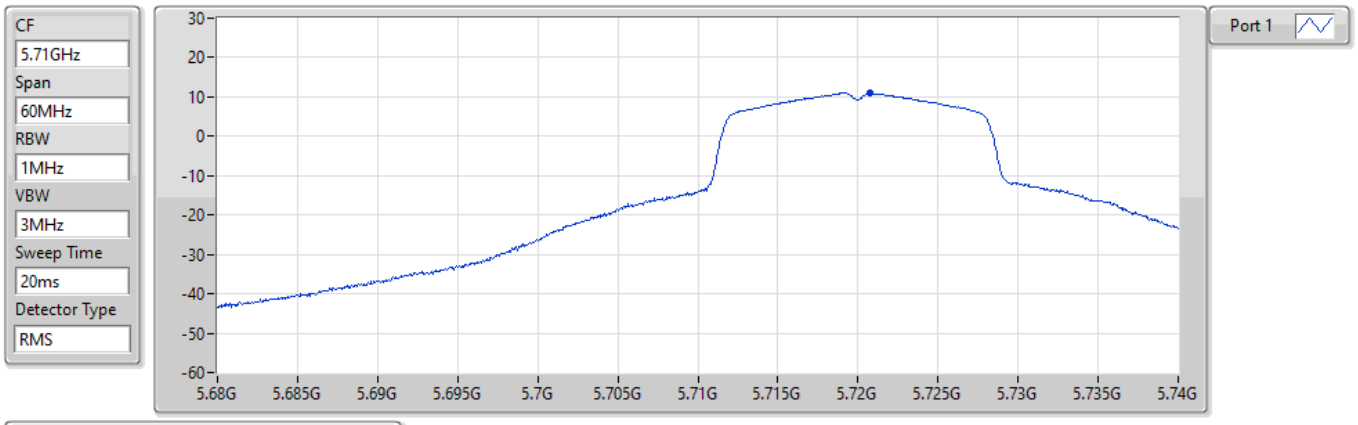

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.93	10.93	10.93

802.11a_Nss1,(6Mbps)_1TX PSD


5720MHz Straddle 5.725-5.85GHz

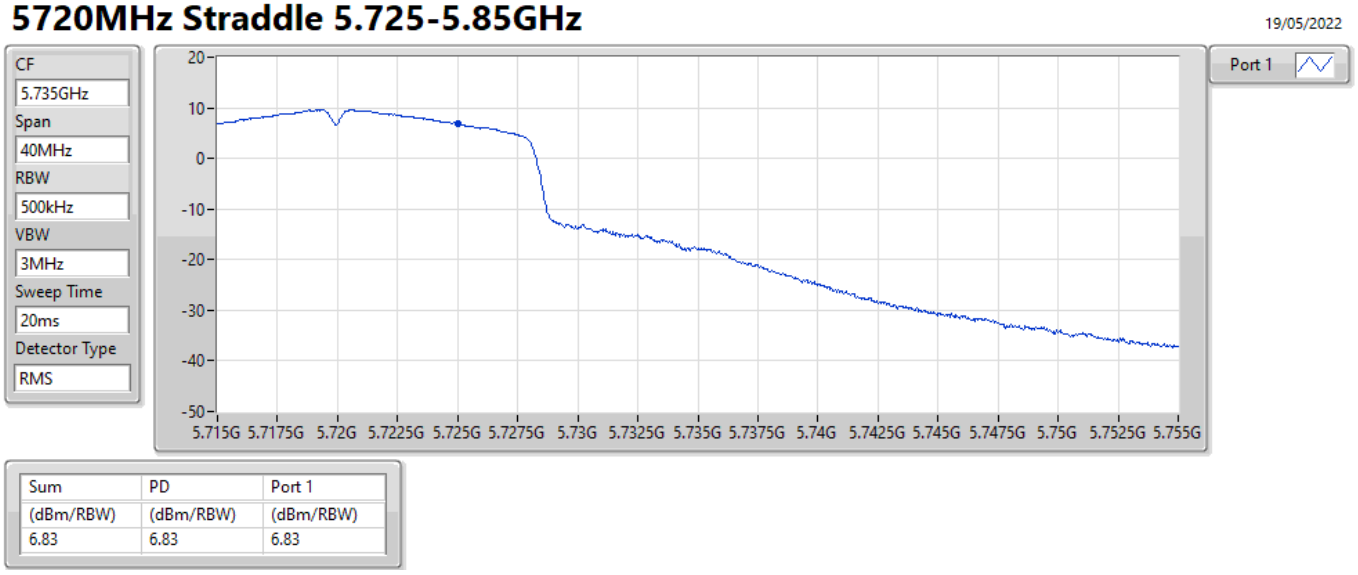

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.83	6.83	6.83

802.11a_Nss1,(6Mbps)_1TX PSD


5745MHz

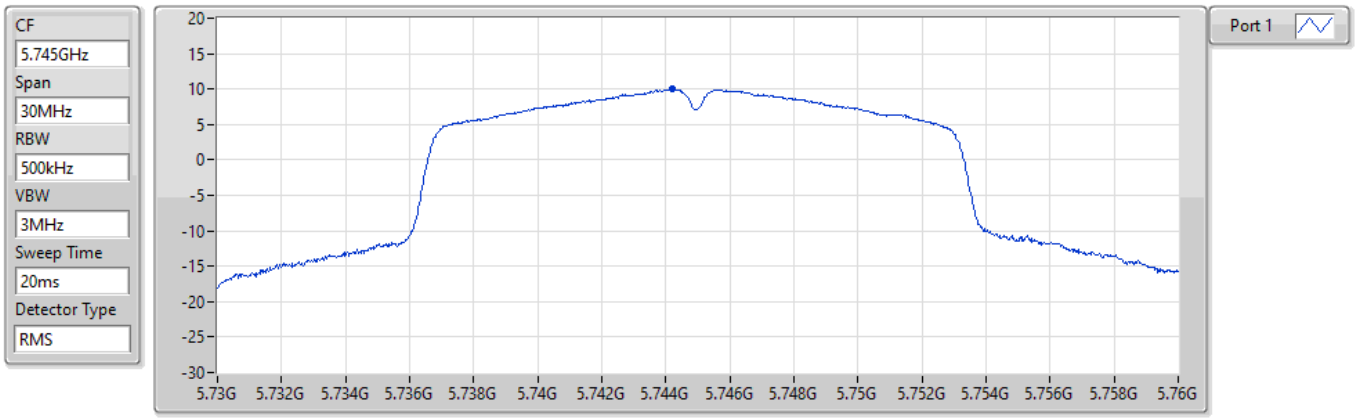

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.96	9.96	9.96

802.11a_Nss1,(6Mbps)_1TX PSD


5785MHz

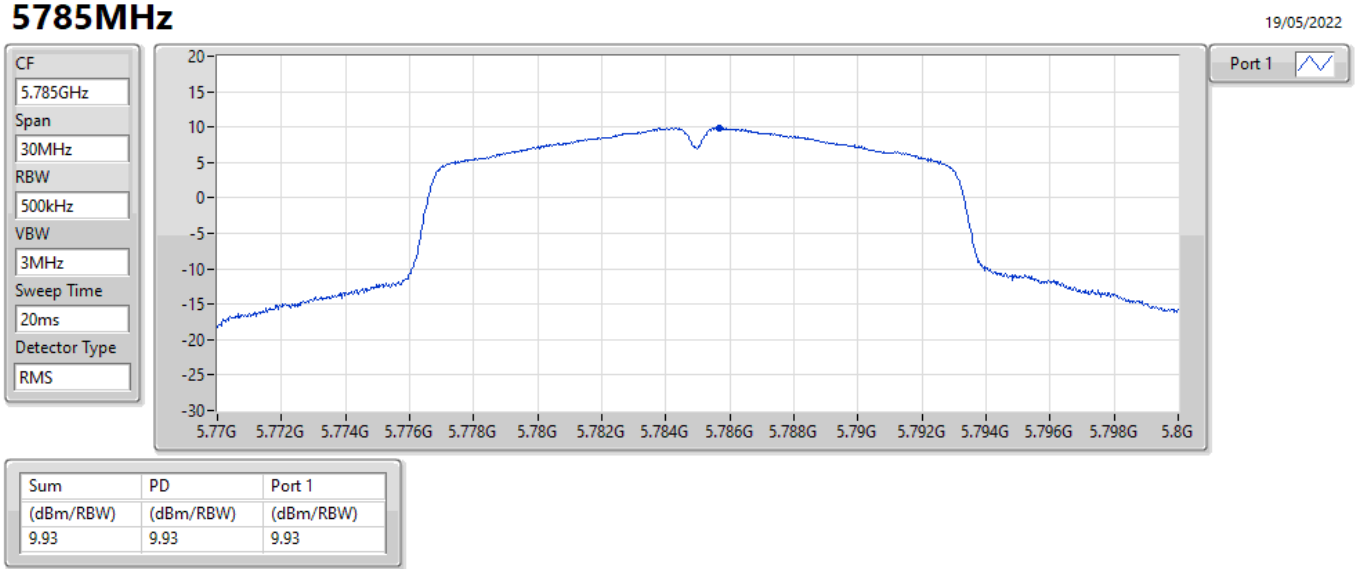

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.93	9.93	9.93

802.11a_Nss1,(6Mbps)_1TX PSD


5825MHz

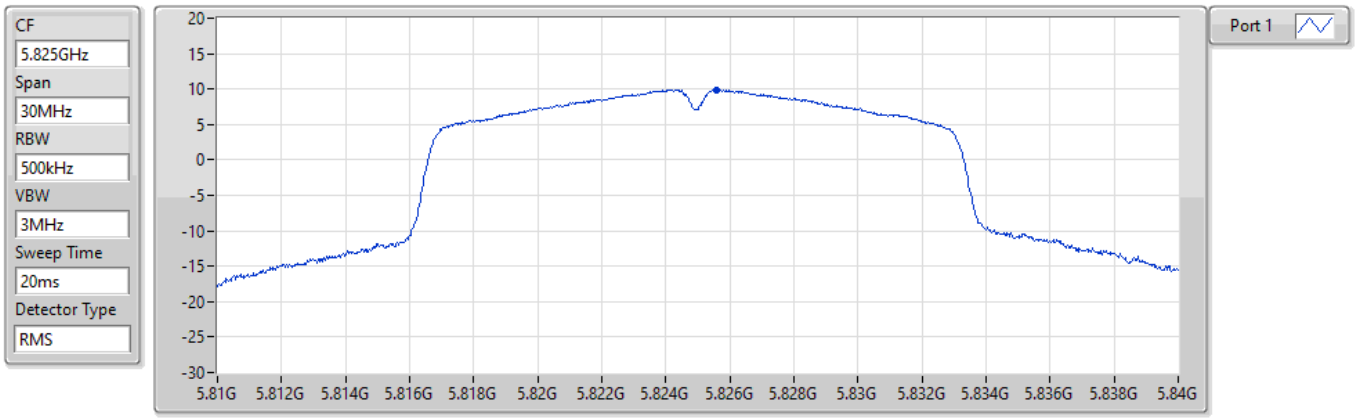

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.88	9.88	9.88

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5180MHz

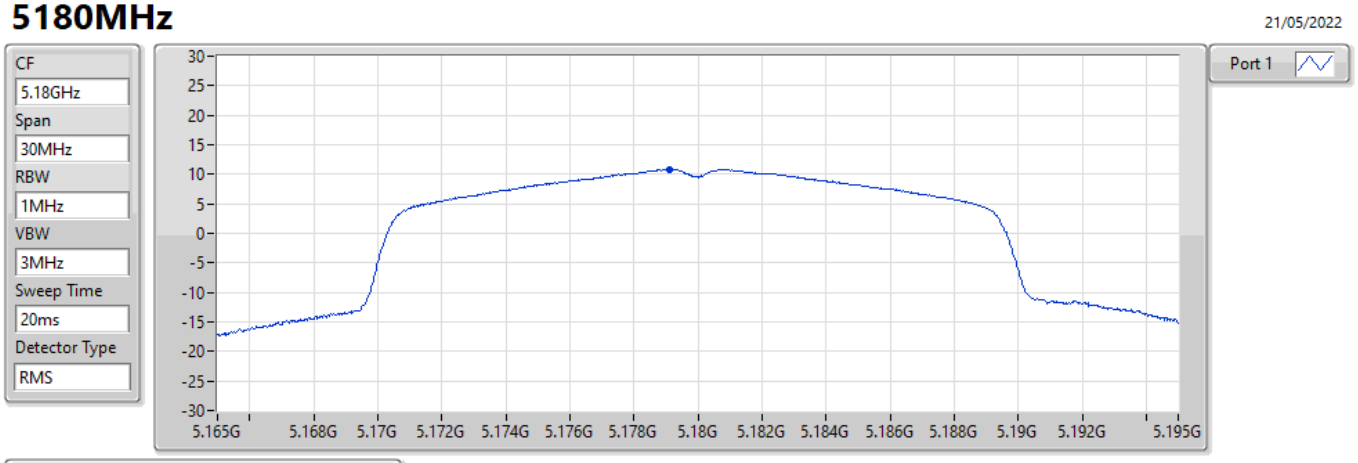

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.87	10.87	10.87

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5200MHz

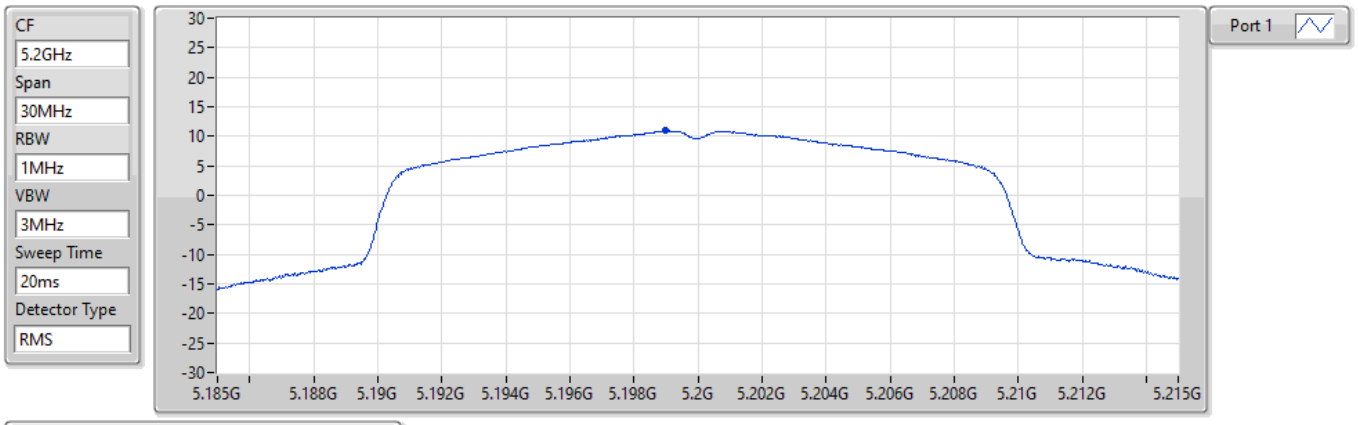

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.90	10.90	10.90

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5240MHz

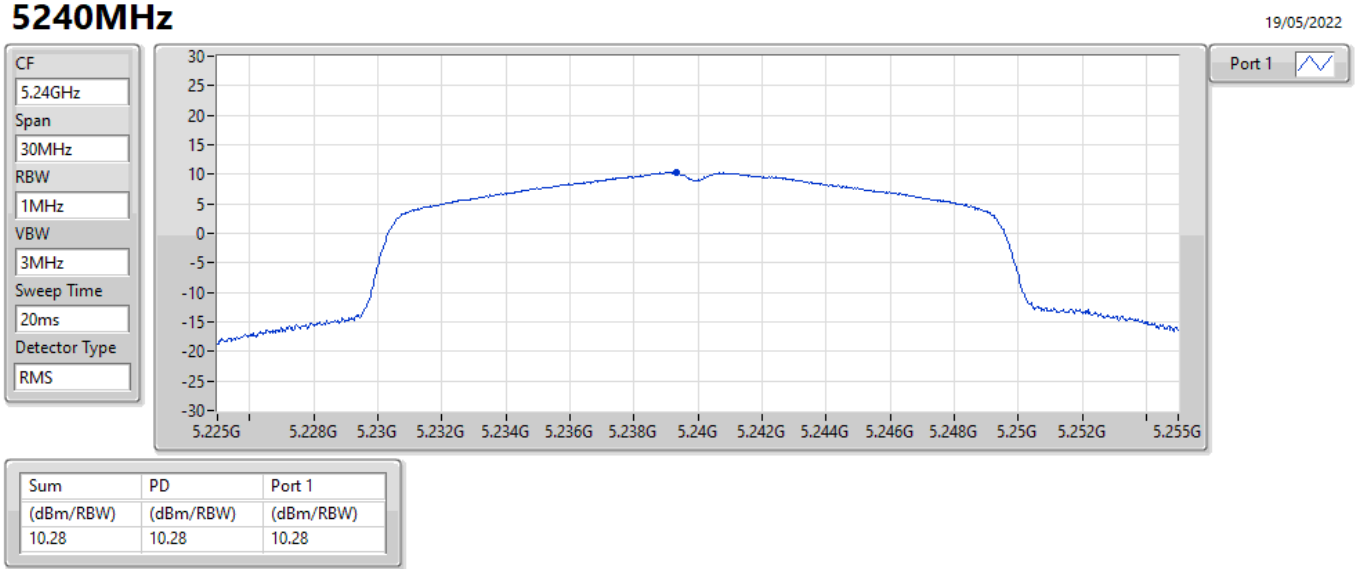

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.28	10.28	10.28

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5260MHz

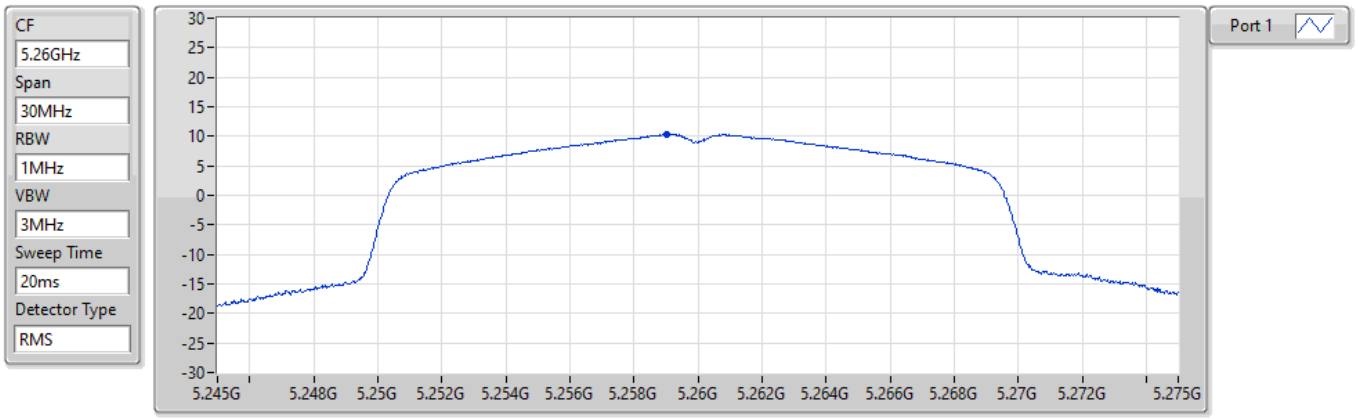

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.31	10.31	10.31

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5300MHz

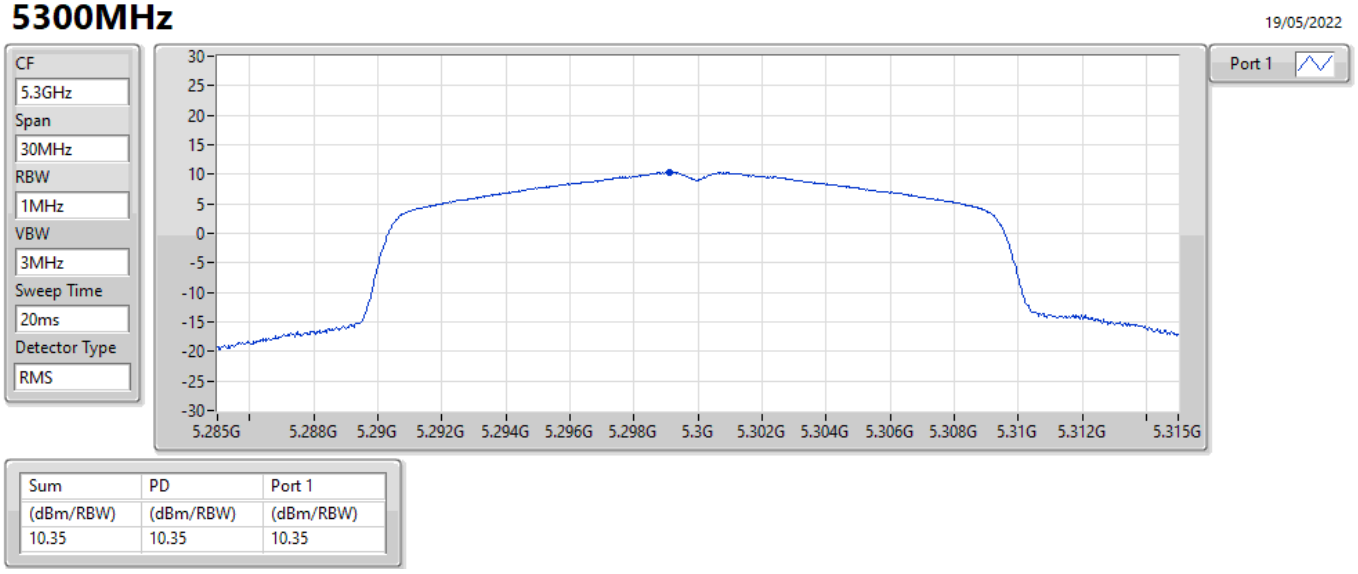

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.35	10.35	10.35

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5320MHz

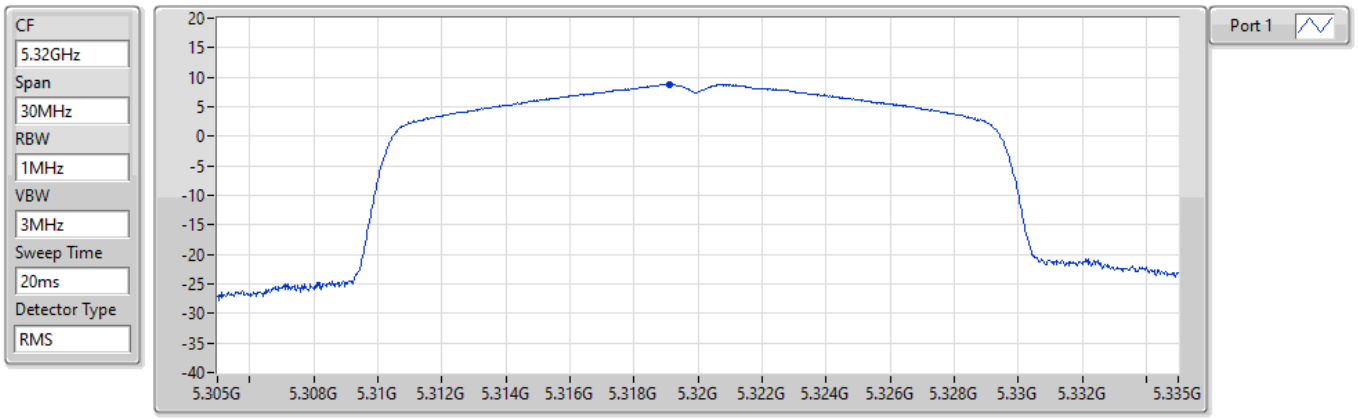

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.77	8.77	8.77

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5500MHz

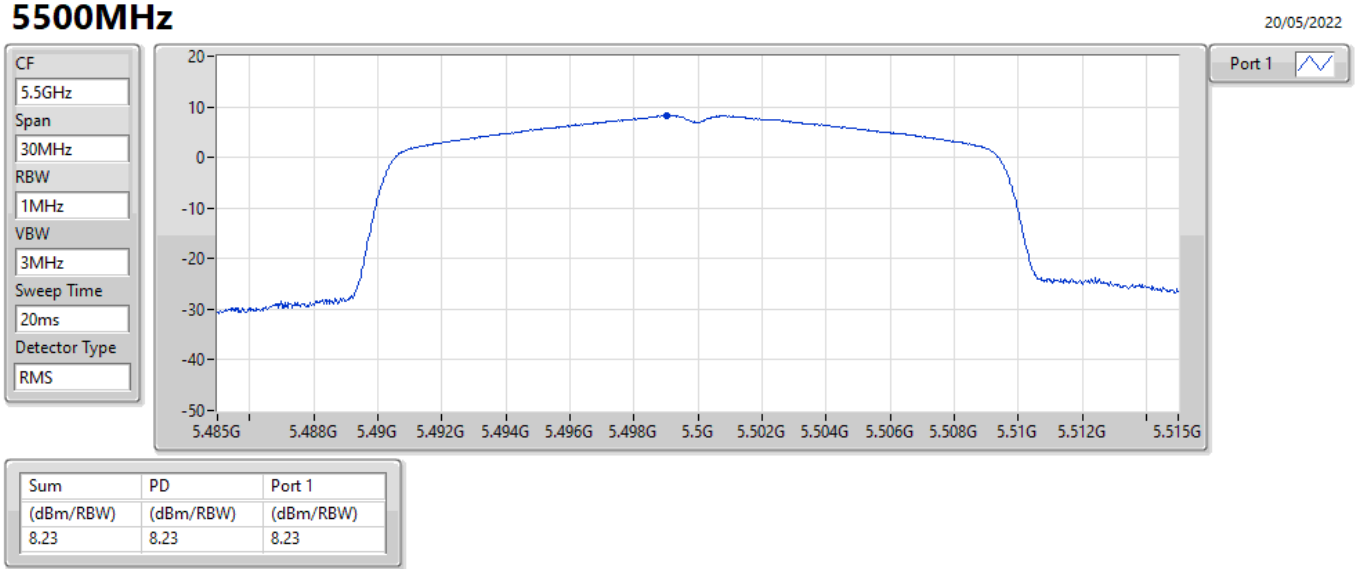

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.23	8.23	8.23

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5580MHz

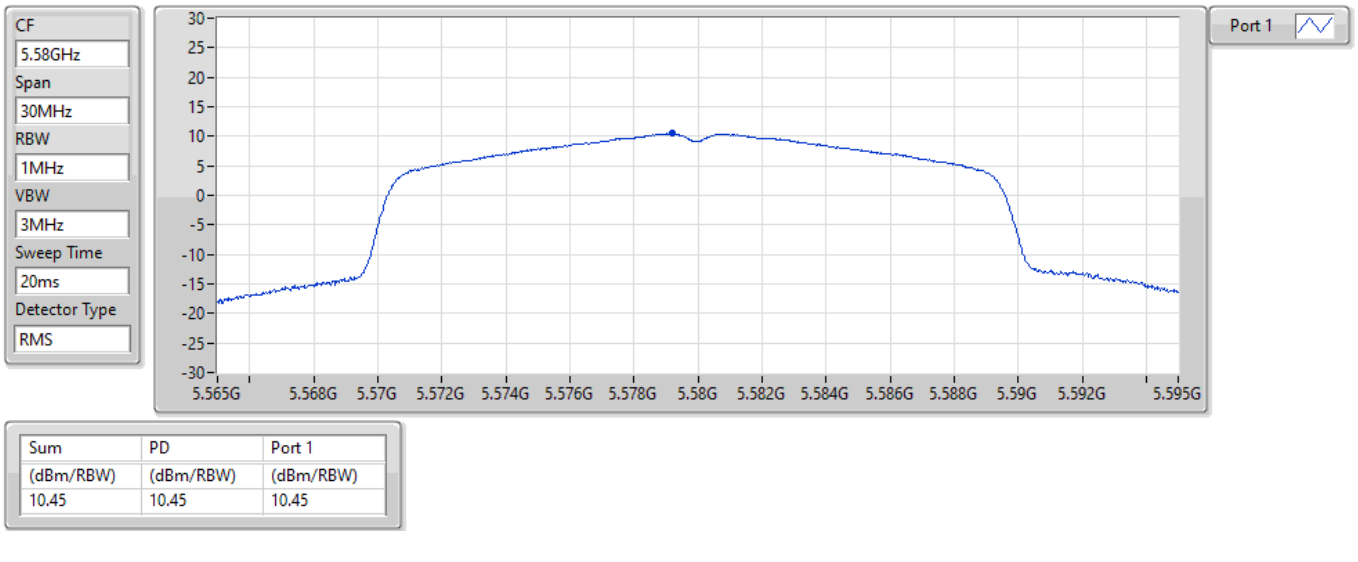

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.45	10.45	10.45

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5700MHz

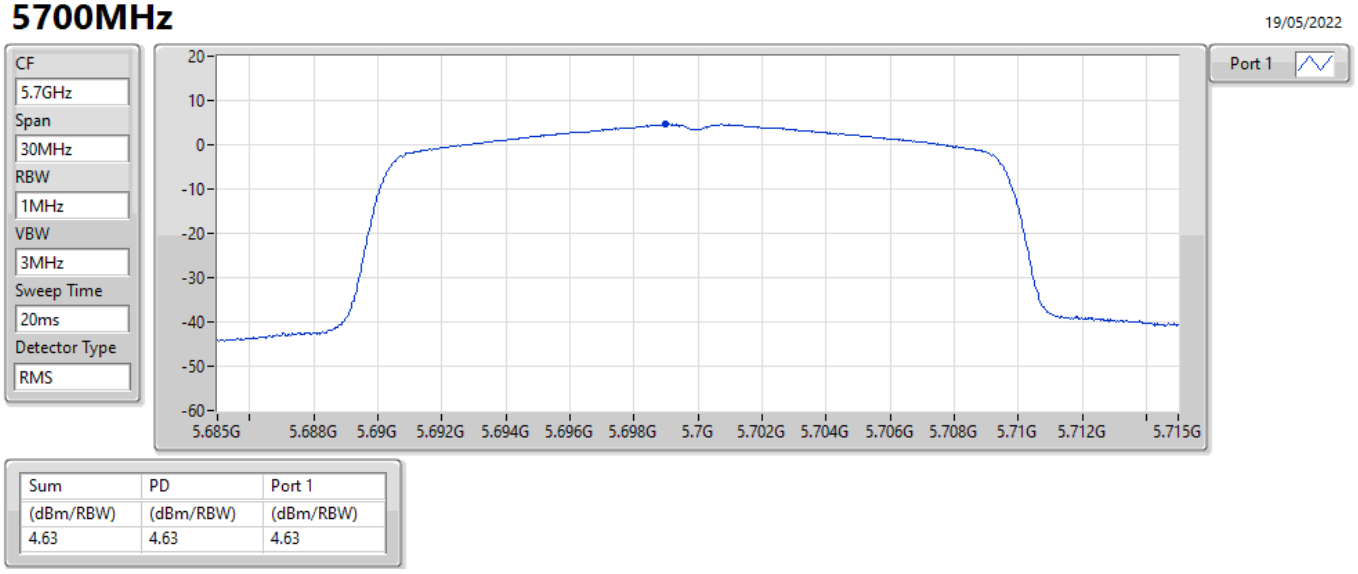

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.63	4.63	4.63

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.47-5.725GHz

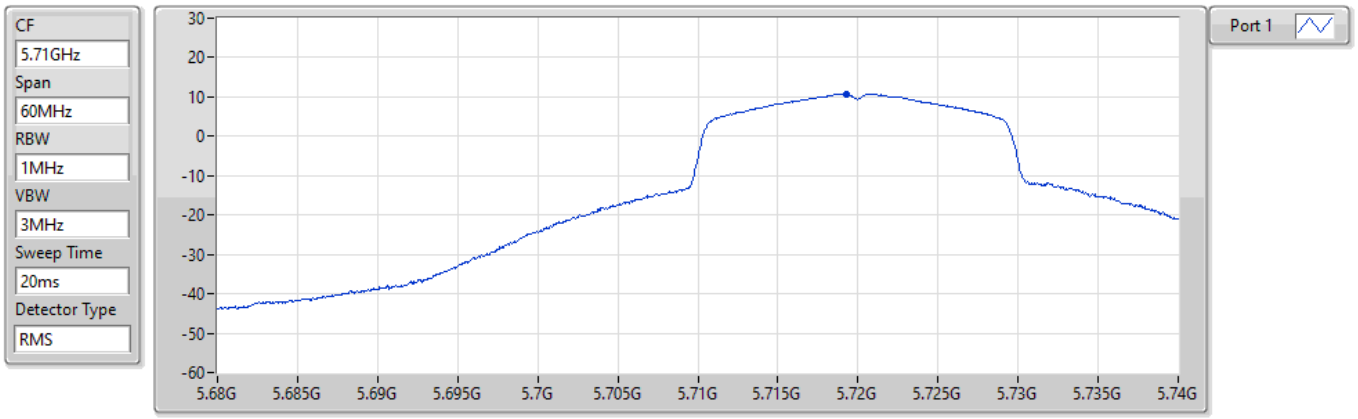

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.76	10.76	10.76

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.725-5.85GHz

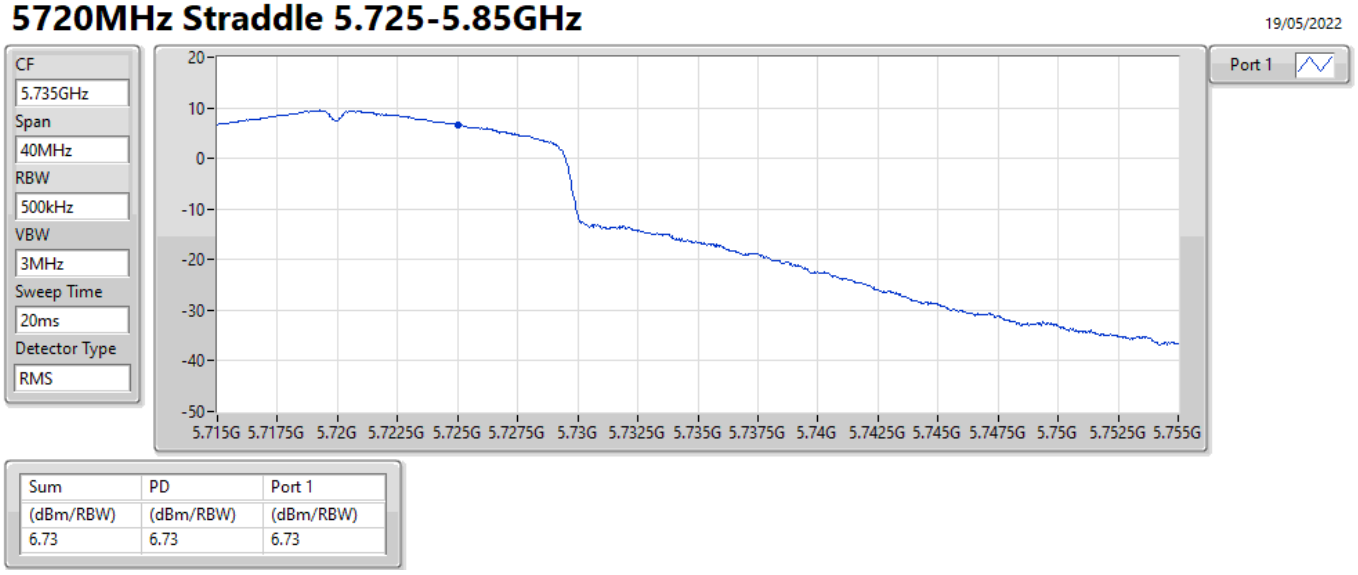

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.73	6.73	6.73

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5745MHz

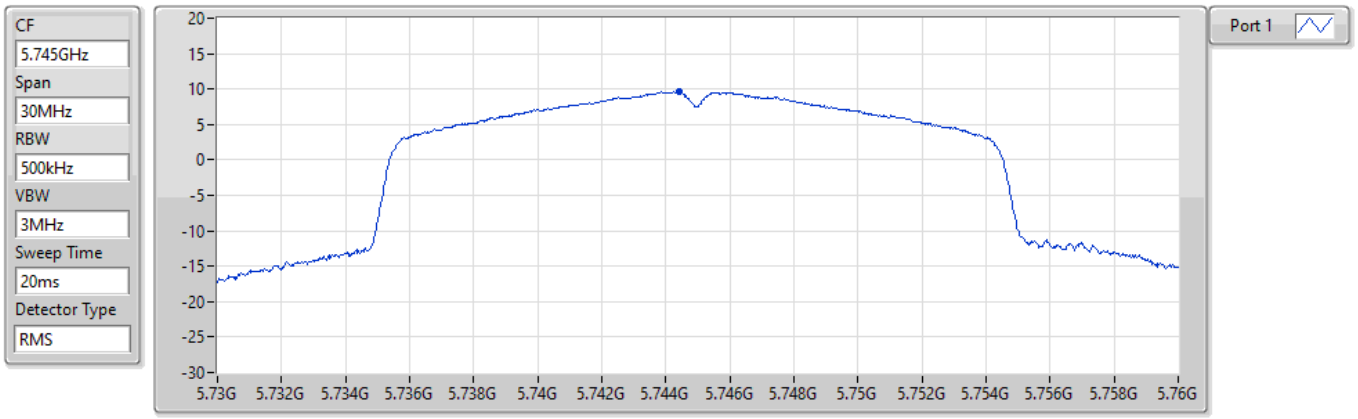

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.65	9.65	9.65

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5785MHz

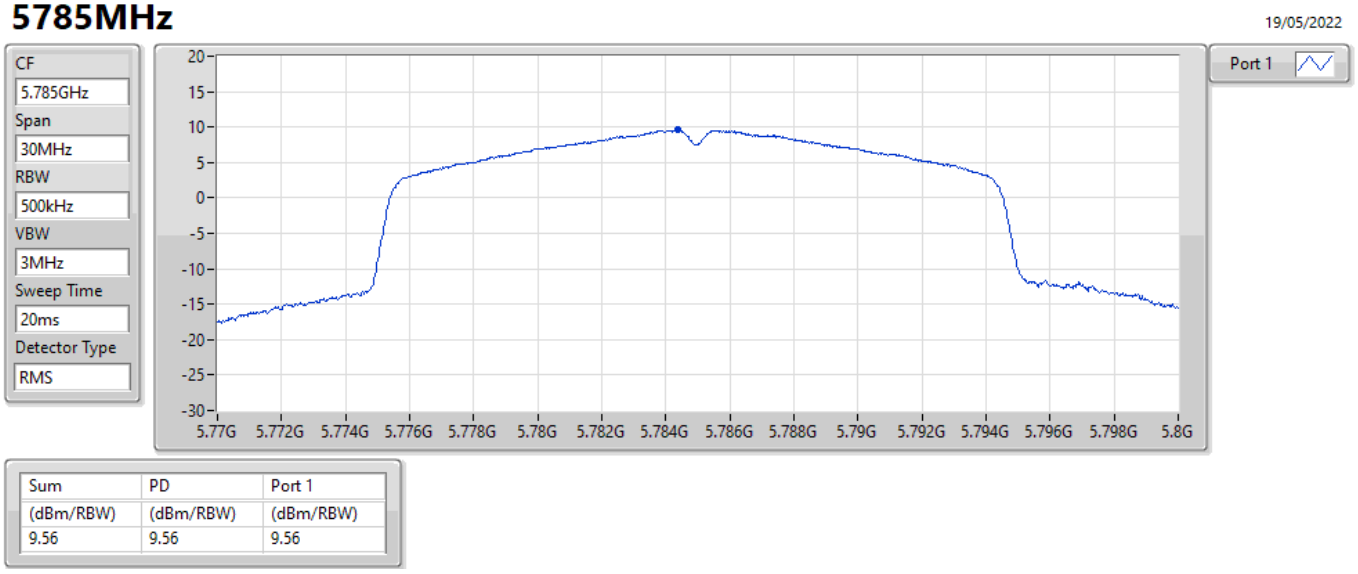

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.56	9.56	9.56

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5825MHz

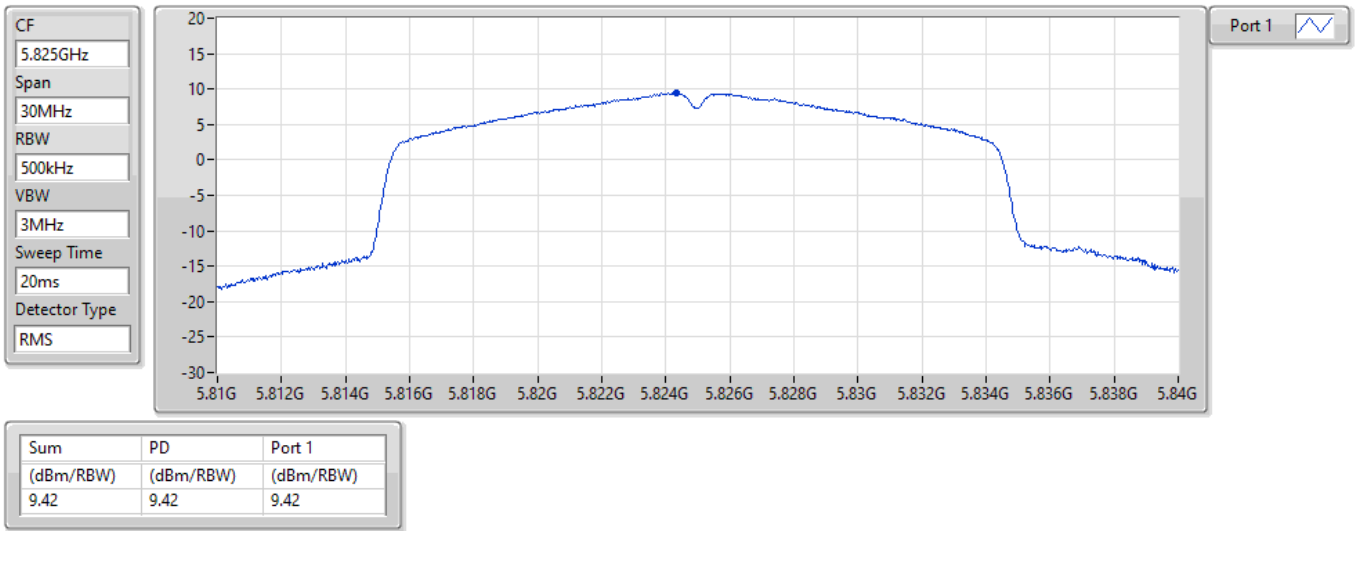

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.42	9.42	9.42

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5190MHz

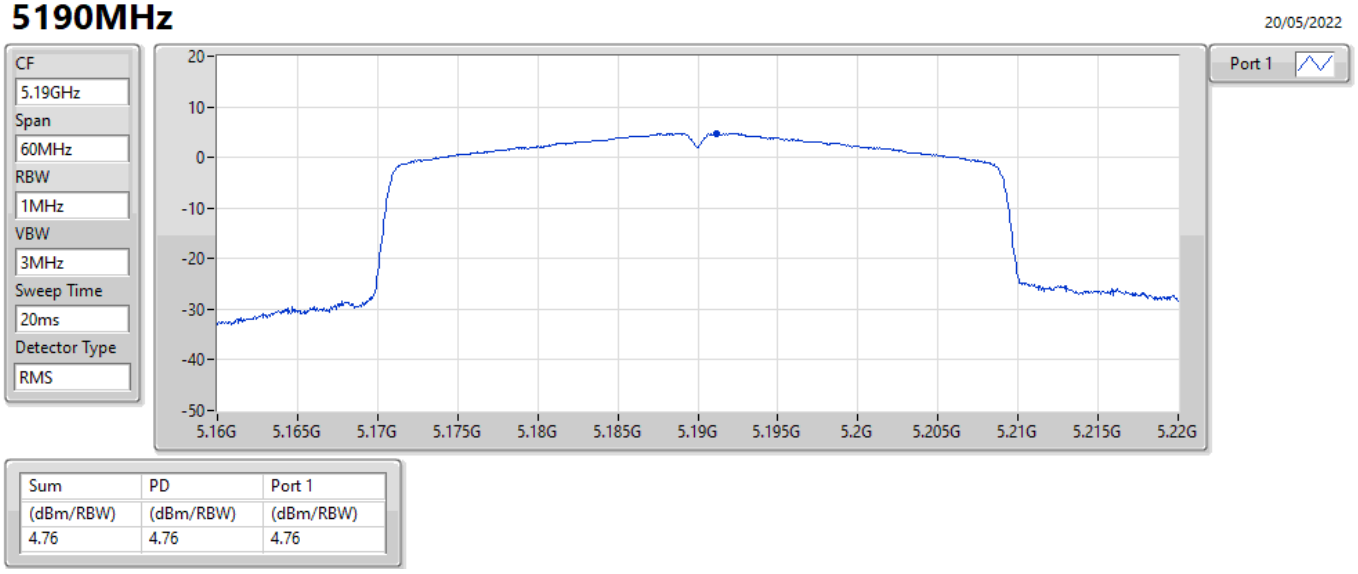

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.76	4.76	4.76

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5230MHz

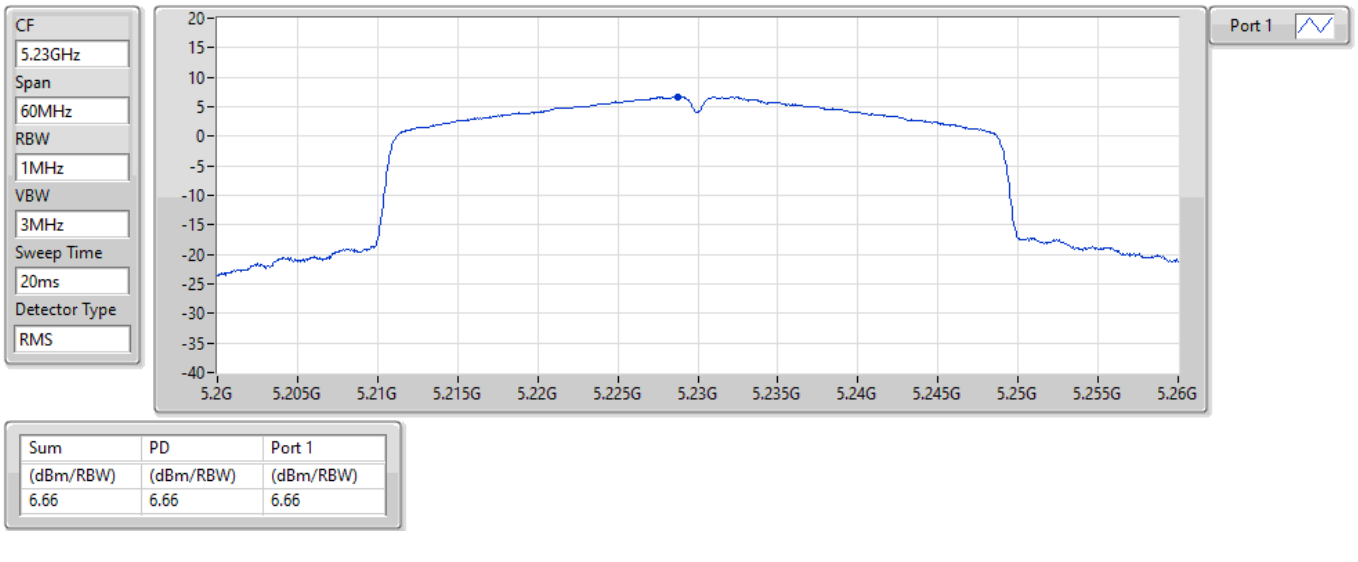

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.66	6.66	6.66

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5270MHz

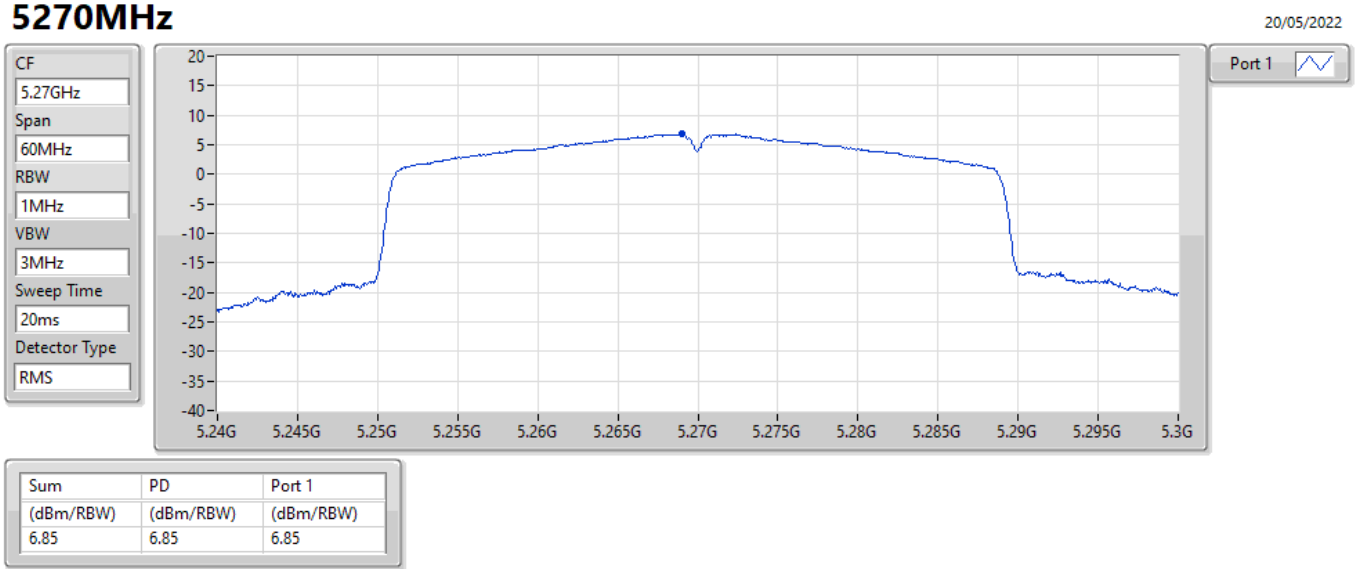

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.85	6.85	6.85

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5310MHz

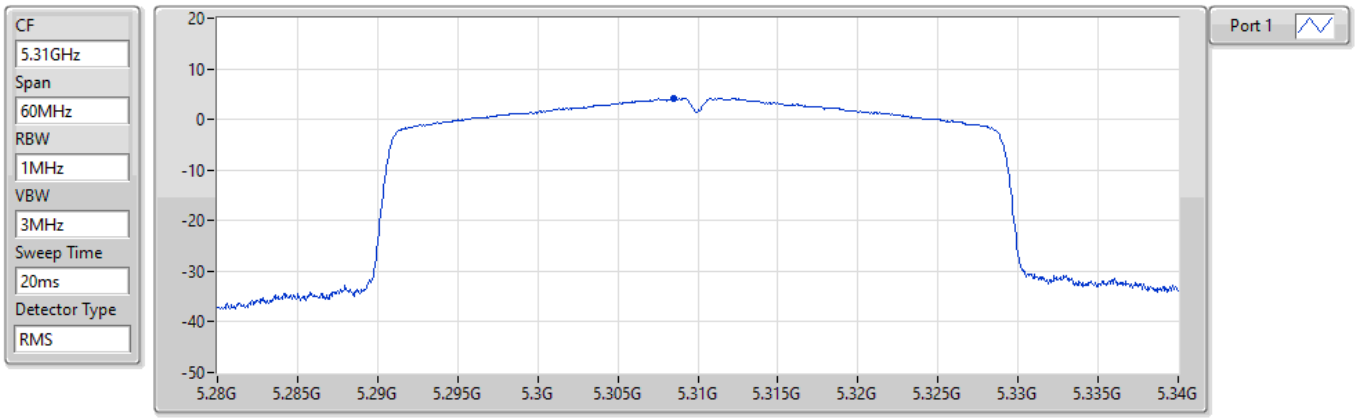

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.18	4.18	4.18

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5510MHz

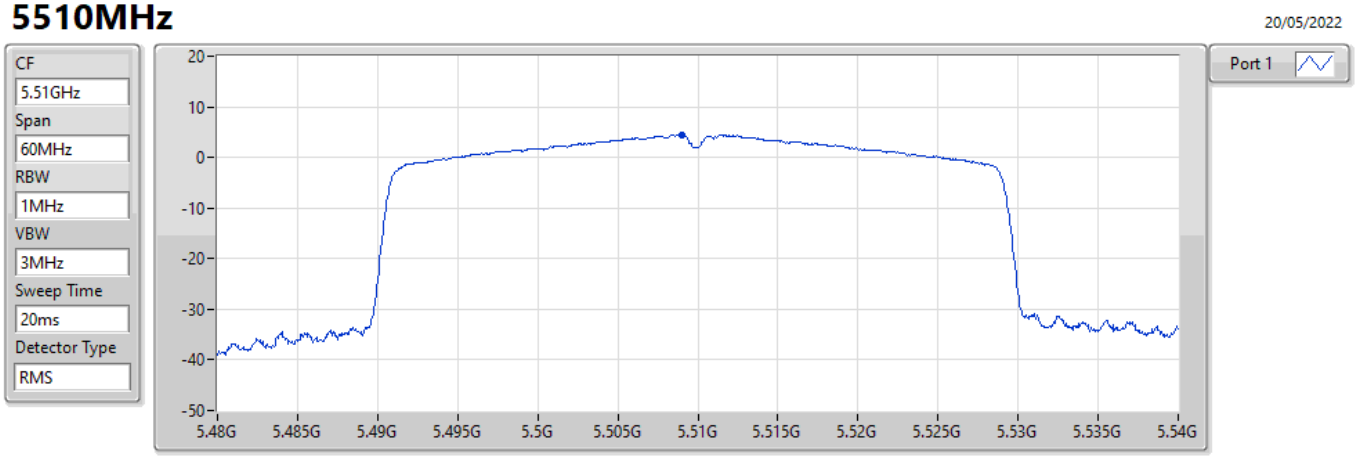

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.48	4.48	4.48

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5550MHz

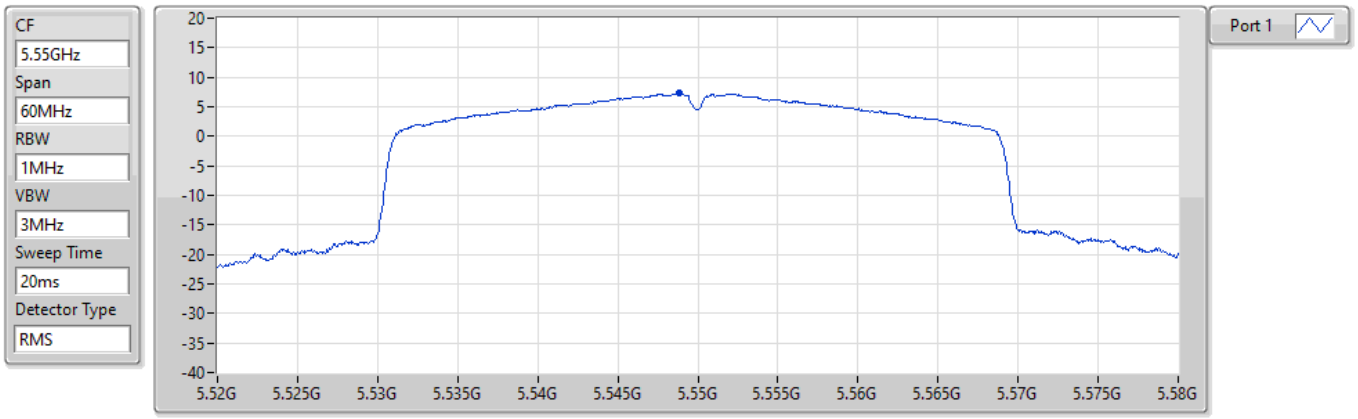

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.24	7.24	7.24

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5670MHz

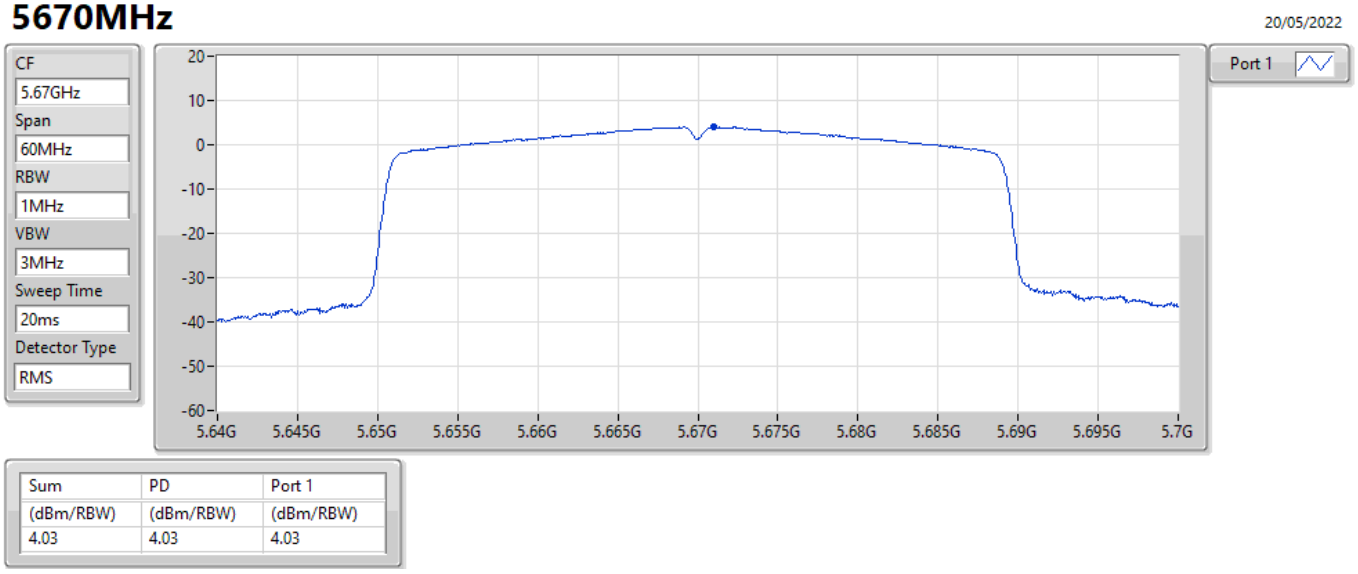

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.03	4.03	4.03

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5710MHz Straddle 5.47-5.725GHz

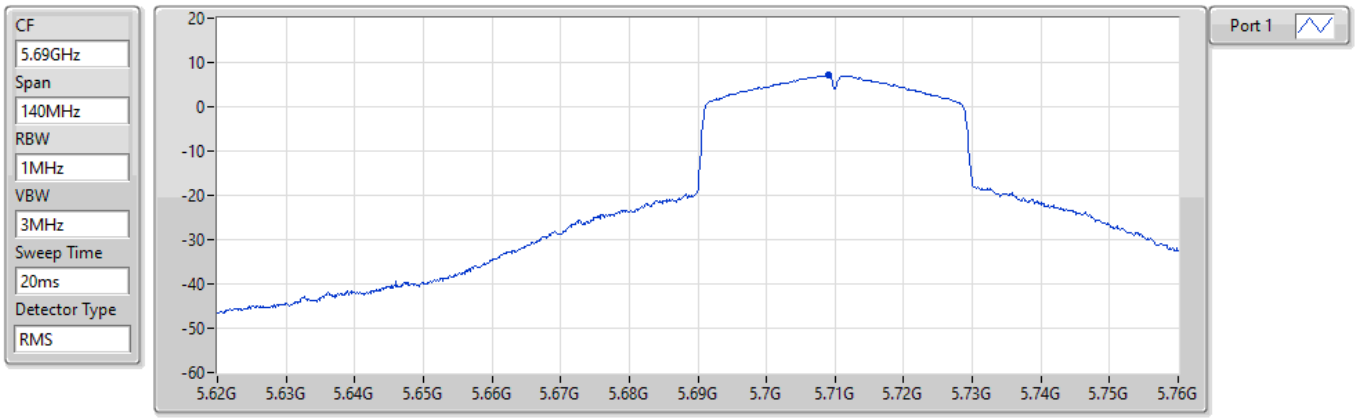

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.07	7.07	7.07

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5710MHz Straddle 5.725-5.85GHz

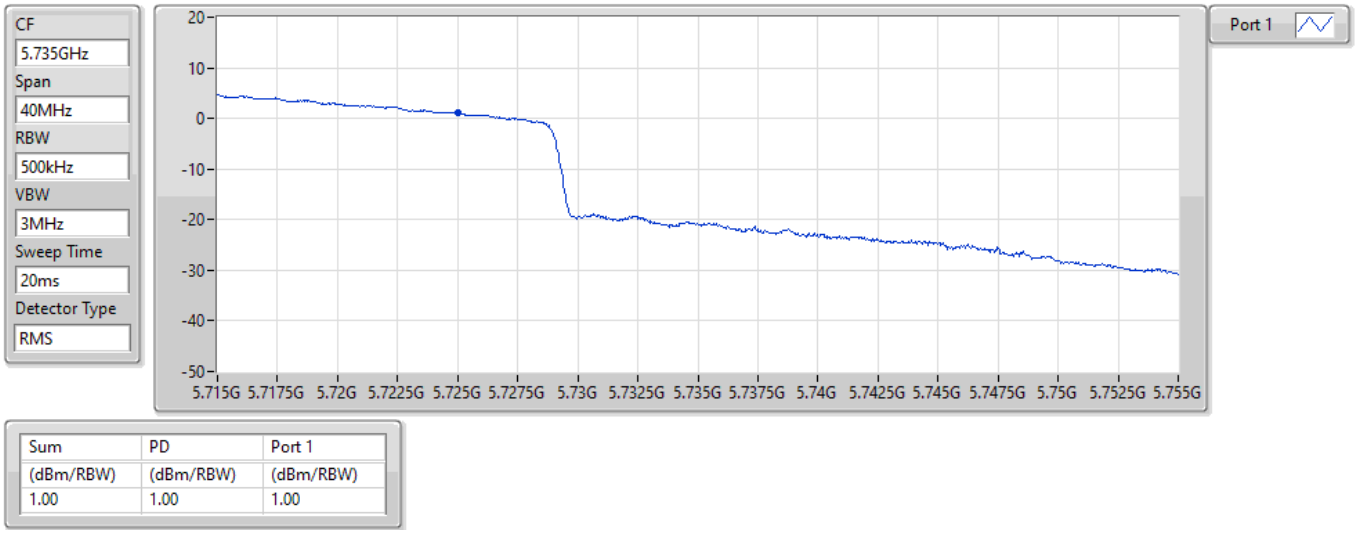

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.00	1.00	1.00

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5755MHz

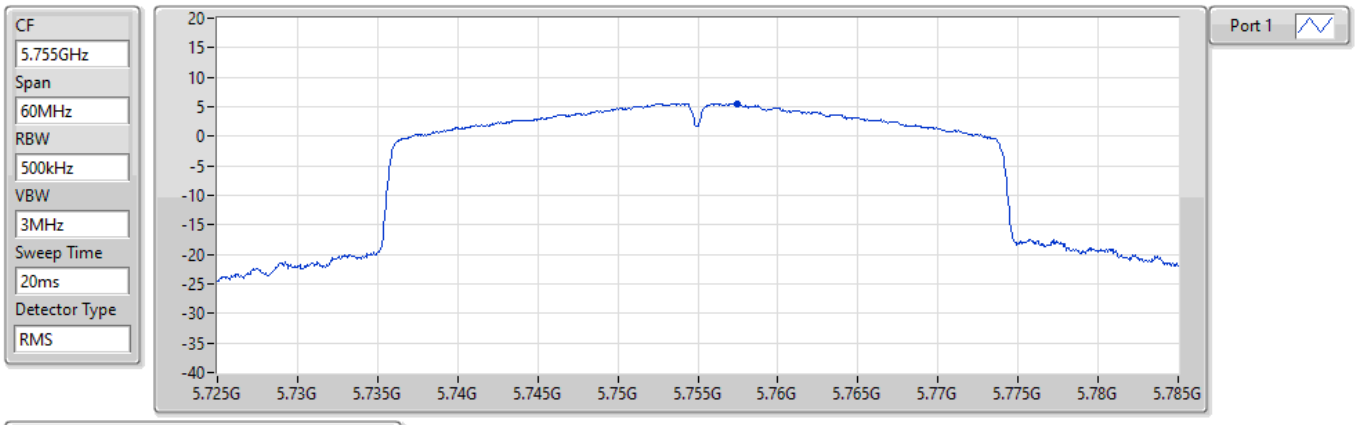

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.55	5.55	5.55

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5795MHz

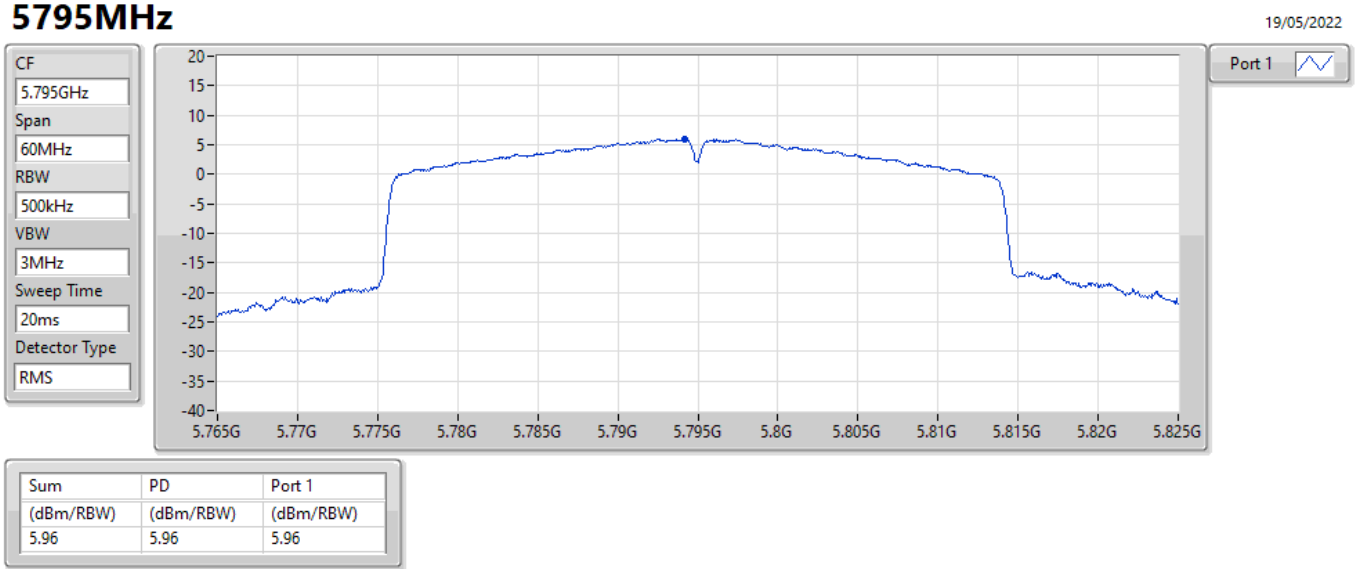

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.96	5.96	5.96

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5210MHz

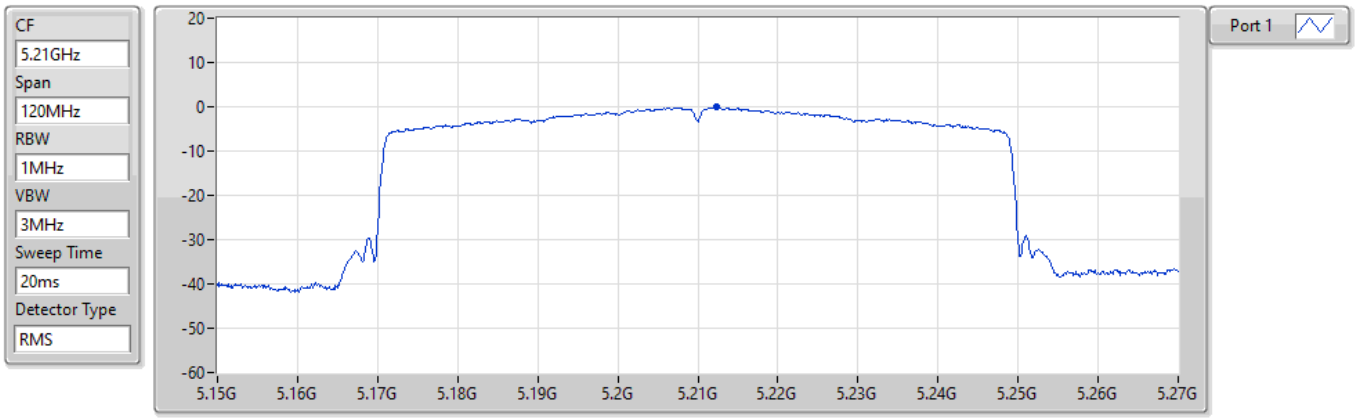

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.04	0.04	0.04

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5290MHz

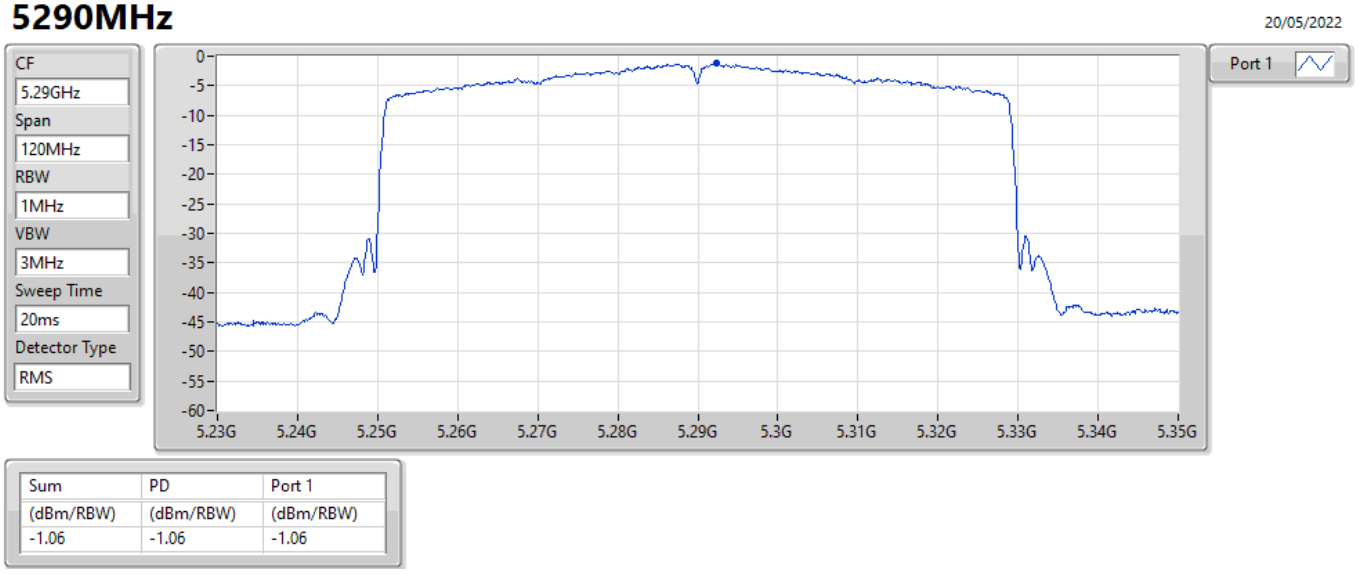

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.06	-1.06	-1.06

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5530MHz

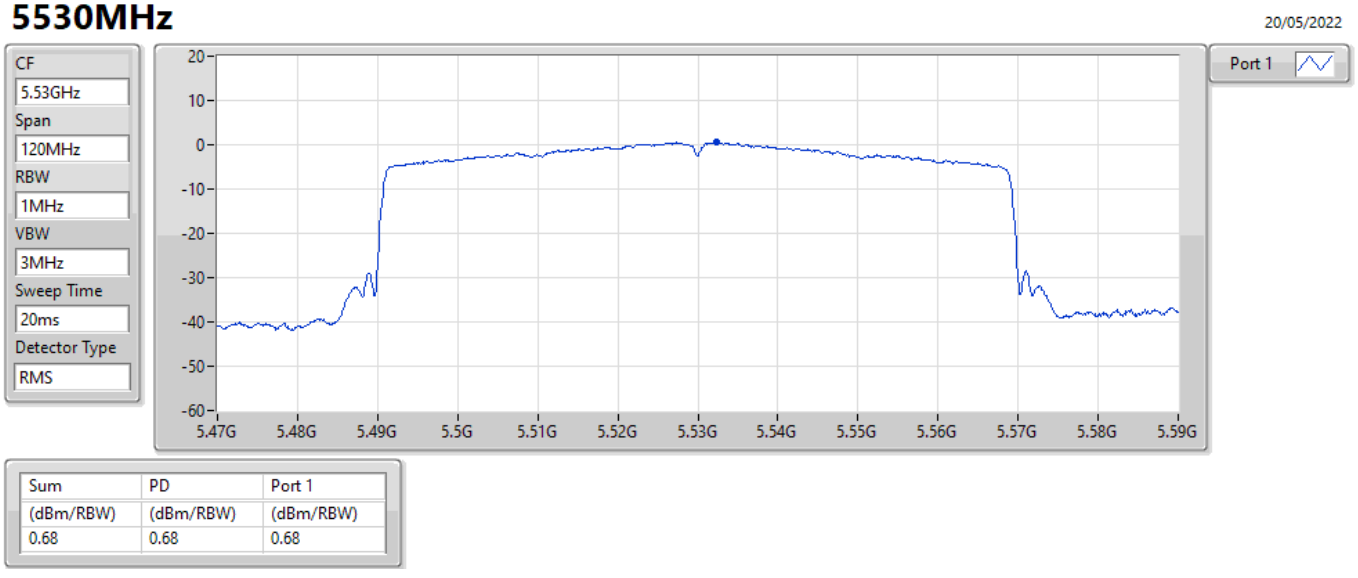

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.68	0.68	0.68

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5610MHz

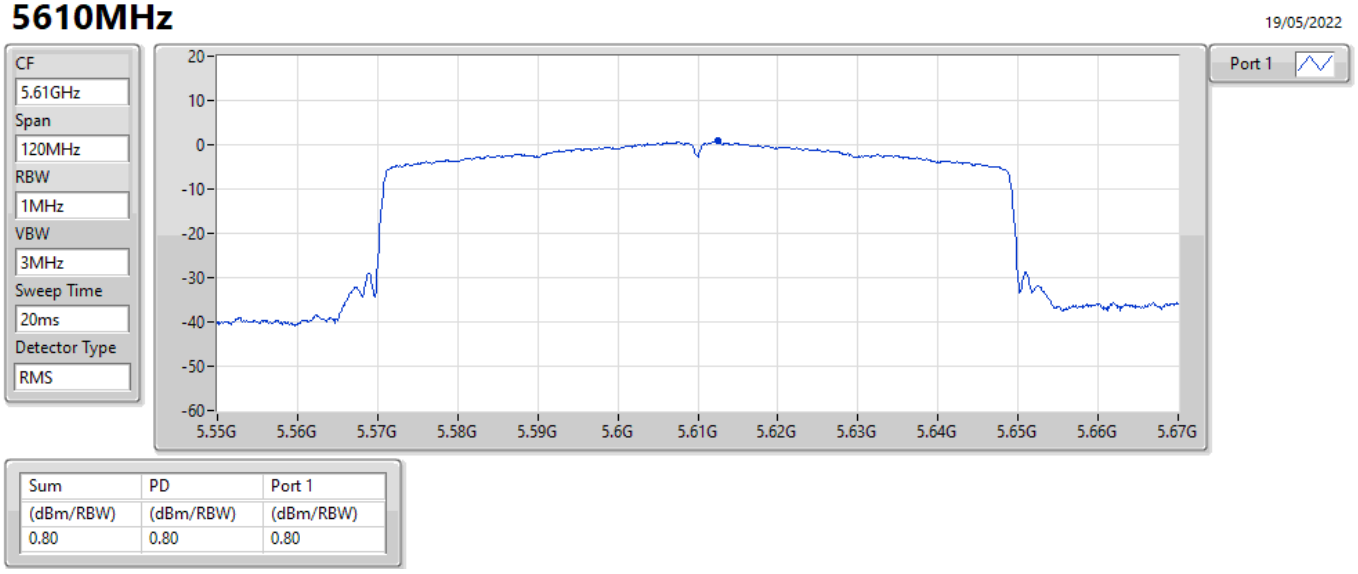

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.80	0.80	0.80

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5690MHz Straddle 5.47-5.725GHz

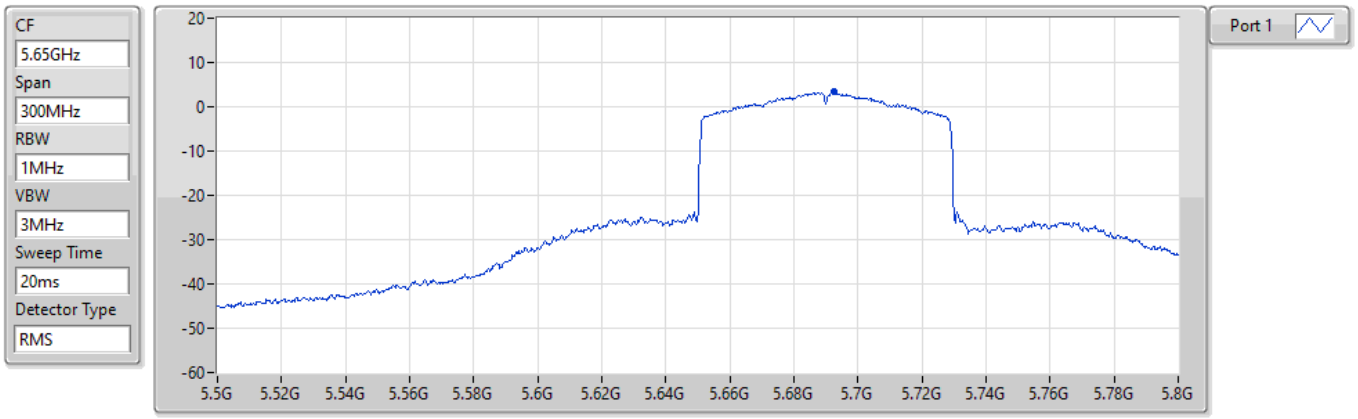

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.36	3.36	3.36

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5690MHz Straddle 5.725-5.85GHz

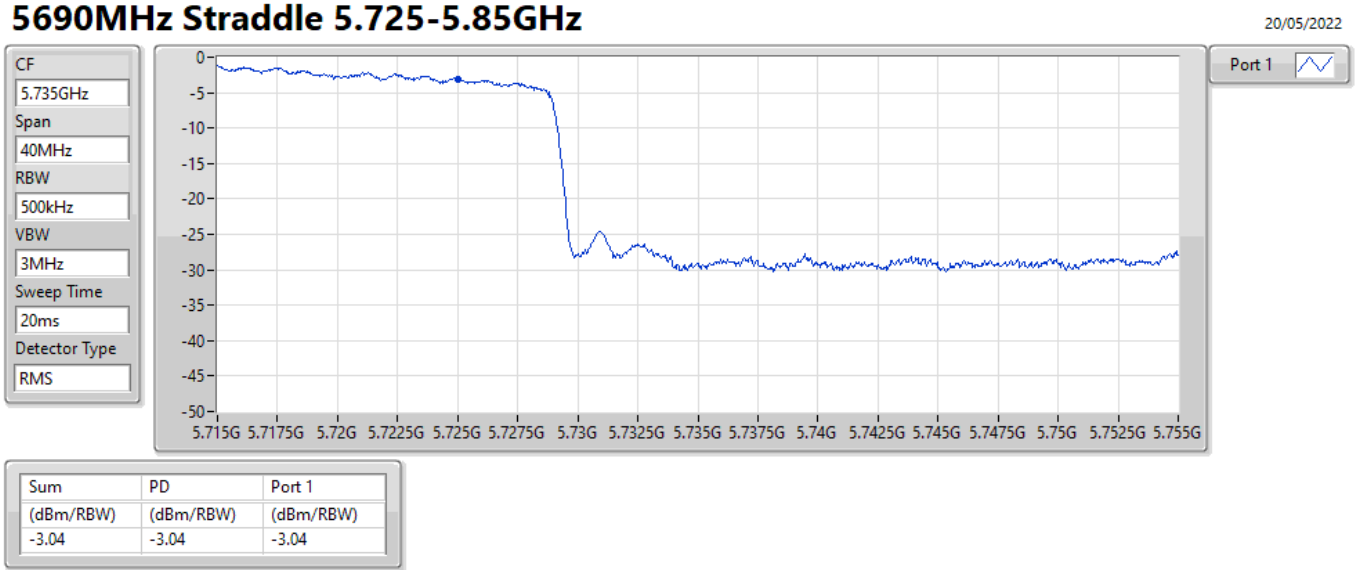

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.04	-3.04	-3.04

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5775MHz

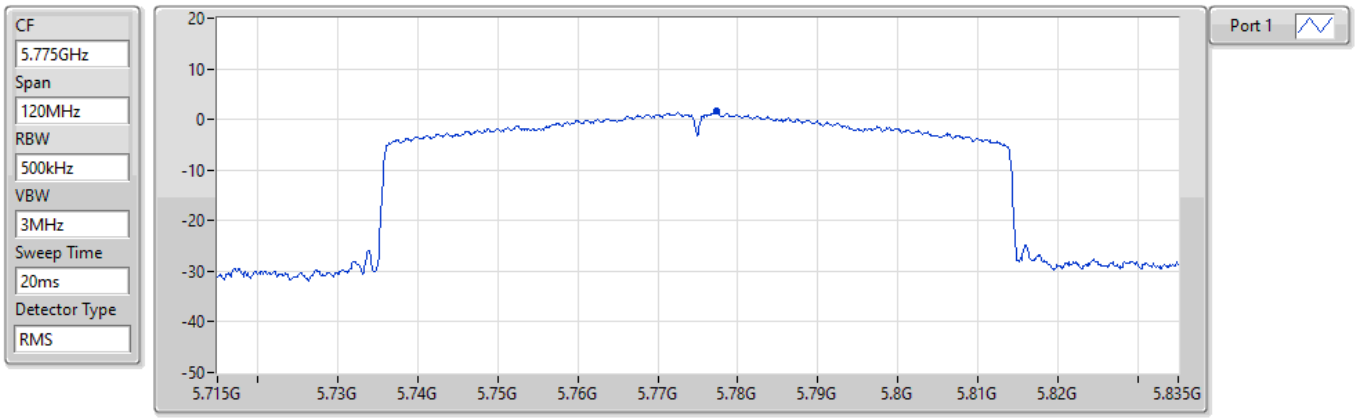

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.58	1.58	1.58

802.11ax HEW160_Nss1,(MCS0)_1TX PSD


5250MHz Straddle 5.15-5.25GHz

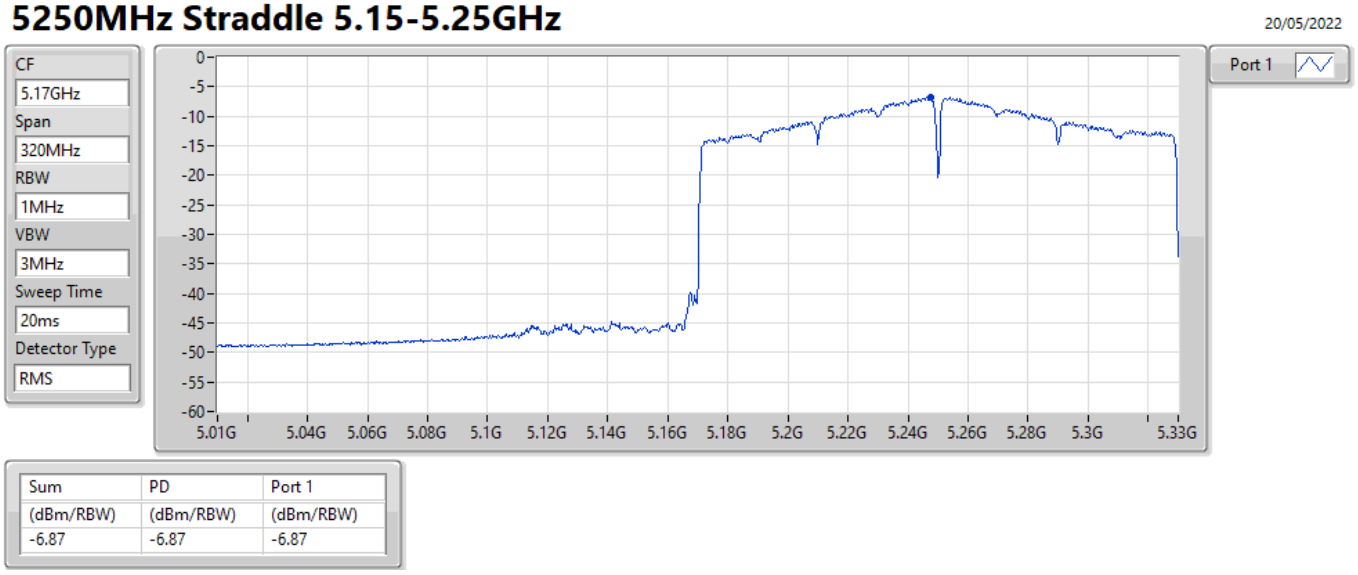

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.87	-6.87	-6.87

802.11ax HEW160_Nss1,(MCS0)_1TX PSD


5250MHz Straddle 5.25-5.35GHz

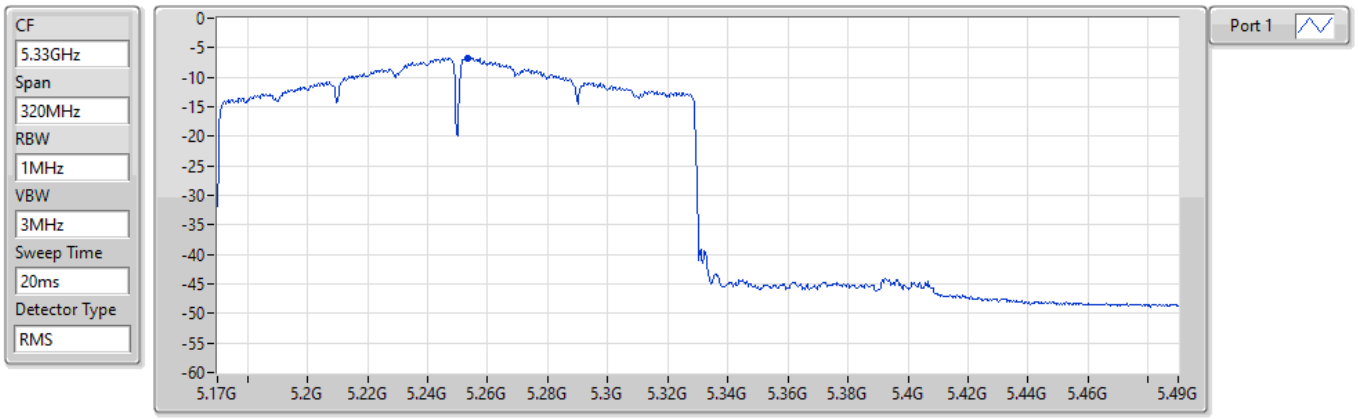

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.71	-6.71	-6.71

802.11ax HEW160_Nss1,(MCS0)_1TX **PSD**

5570MHz

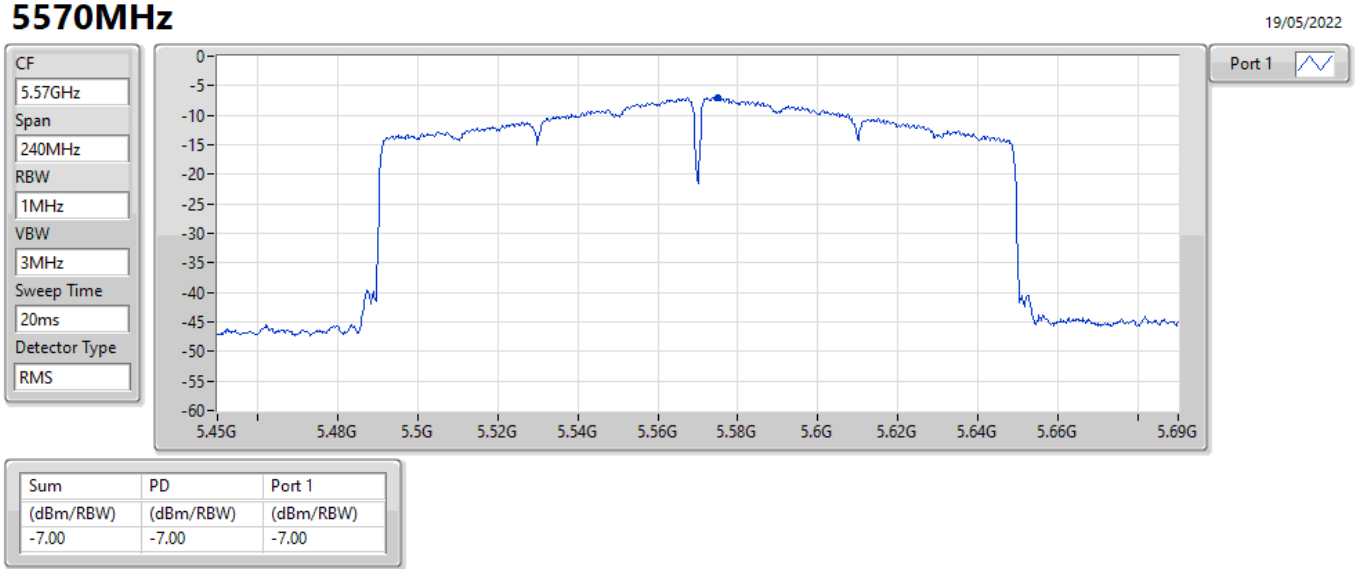

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.00	-7.00	-7.00

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_1TX	10.95
802.11ax HEW20_Nss1,(MCS0)_1TX	10.90
802.11ax HEW40_Nss1,(MCS0)_1TX	6.66
802.11ax HEW80_Nss1,(MCS0)_1TX	0.28
802.11ax HEW160_Nss1,(MCS0)_1TX	-5.84
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_1TX	10.83
802.11ax HEW20_Nss1,(MCS0)_1TX	10.35
802.11ax HEW40_Nss1,(MCS0)_1TX	6.85
802.11ax HEW80_Nss1,(MCS0)_1TX	-1.75
802.11ax HEW160_Nss1,(MCS0)_1TX	-5.51
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_1TX	10.93
802.11ax HEW20_Nss1,(MCS0)_1TX	10.76
802.11ax HEW40_Nss1,(MCS0)_1TX	7.24
802.11ax HEW80_Nss1,(MCS0)_1TX	3.36
802.11ax HEW160_Nss1,(MCS0)_1TX	-6.04
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_1TX	9.96
802.11ax HEW20_Nss1,(MCS0)_1TX	9.65
802.11ax HEW40_Nss1,(MCS0)_1TX	5.96
802.11ax HEW80_Nss1,(MCS0)_1TX	2.30

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	5.00	10.92	10.92	17.00
5200MHz	Pass	5.00	10.95	10.95	17.00
5240MHz	Pass	5.00	10.60	10.60	17.00
5260MHz	Pass	5.00	10.57	10.57	11.00
5300MHz	Pass	5.00	10.83	10.83	11.00
5320MHz	Pass	5.00	8.41	8.41	11.00
5500MHz	Pass	5.00	9.27	9.27	11.00
5580MHz	Pass	5.00	10.77	10.77	11.00
5700MHz	Pass	5.00	8.02	8.02	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	10.93	10.93	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	6.83	6.83	30.00
5745MHz	Pass	5.00	9.96	9.96	30.00
5785MHz	Pass	5.00	9.93	9.93	30.00
5825MHz	Pass	5.00	9.88	9.88	30.00
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	5.00	10.87	10.87	17.00
5200MHz	Pass	5.00	10.90	10.90	17.00
5240MHz	Pass	5.00	10.28	10.28	17.00
5260MHz	Pass	5.00	10.31	10.31	11.00
5300MHz	Pass	5.00	10.35	10.35	11.00
5320MHz	Pass	5.00	8.25	8.25	11.00
5500MHz	Pass	5.00	8.23	8.23	11.00
5580MHz	Pass	5.00	10.45	10.45	11.00
5700MHz	Pass	5.00	4.63	4.63	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	10.76	10.76	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	6.73	6.73	30.00
5745MHz	Pass	5.00	9.65	9.65	30.00
5785MHz	Pass	5.00	9.56	9.56	30.00
5825MHz	Pass	5.00	9.42	9.42	30.00
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	5.00	5.53	5.53	11.00
5230MHz	Pass	5.00	6.66	6.66	17.00
5270MHz	Pass	5.00	6.85	6.85	11.00
5310MHz	Pass	5.00	2.40	2.40	11.00
5510MHz	Pass	5.00	4.25	4.25	11.00
5550MHz	Pass	5.00	7.24	7.24	11.00
5670MHz	Pass	5.00	3.62	3.62	11.00
5710MHz Straddle 5.47-5.725GHz	Pass	5.00	7.07	7.07	11.00
5710MHz Straddle 5.725-5.85GHz	Pass	5.00	1.00	1.00	30.00
5755MHz	Pass	5.00	5.55	5.55	30.00
5795MHz	Pass	5.00	5.96	5.96	30.00
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	5.00	0.28	0.28	11.00
5290MHz	Pass	5.00	-1.75	-1.75	11.00
5530MHz	Pass	5.00	0.37	0.37	11.00
5610MHz	Pass	5.00	0.34	0.34	11.00
5690MHz Straddle 5.47-5.725GHz	Pass	5.00	3.36	3.36	11.00
5690MHz Straddle 5.725-5.85GHz	Pass	5.00	-3.04	-3.04	30.00
5775MHz	Pass	5.00	2.30	2.30	30.00
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
5250MHz Straddle 5.15-5.25GHz	Pass	5.00	-5.84	-5.84	11.00
5250MHz Straddle 5.25-5.35GHz	Pass	5.00	-5.51	-5.51	11.00
5570MHz	Pass	5.00	-6.04	-6.04	11.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11a_Nss1,(6Mbps)_1TX PSD


5180MHz

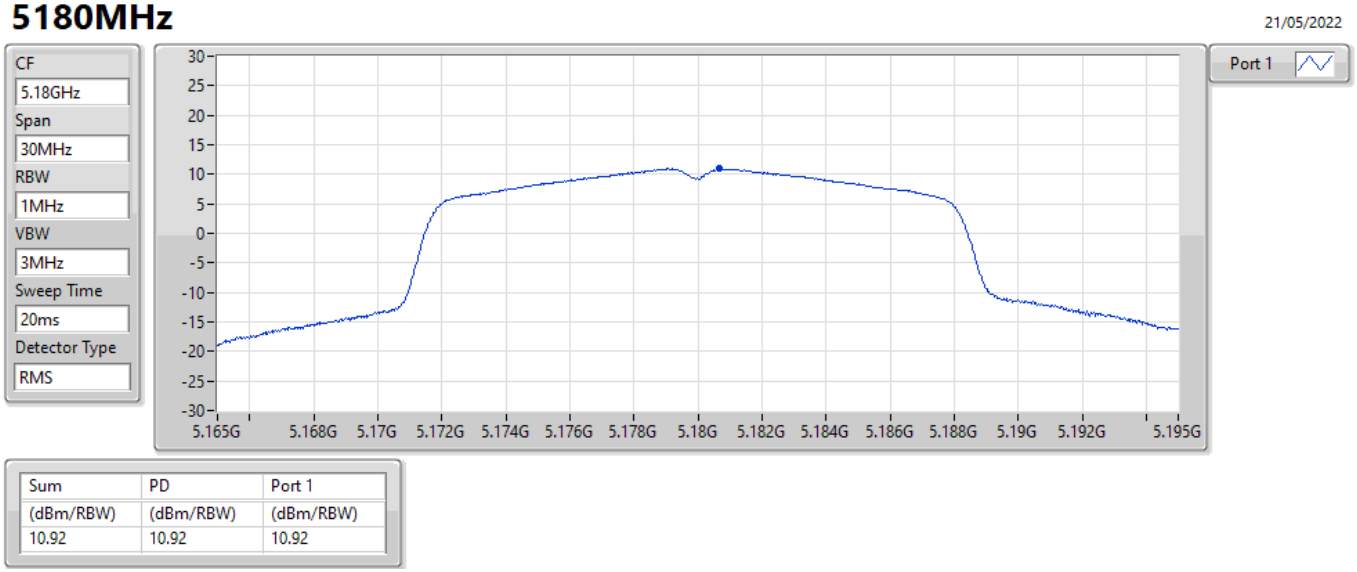

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.92	10.92	10.92

802.11a_Nss1,(6Mbps)_1TX PSD


5200MHz

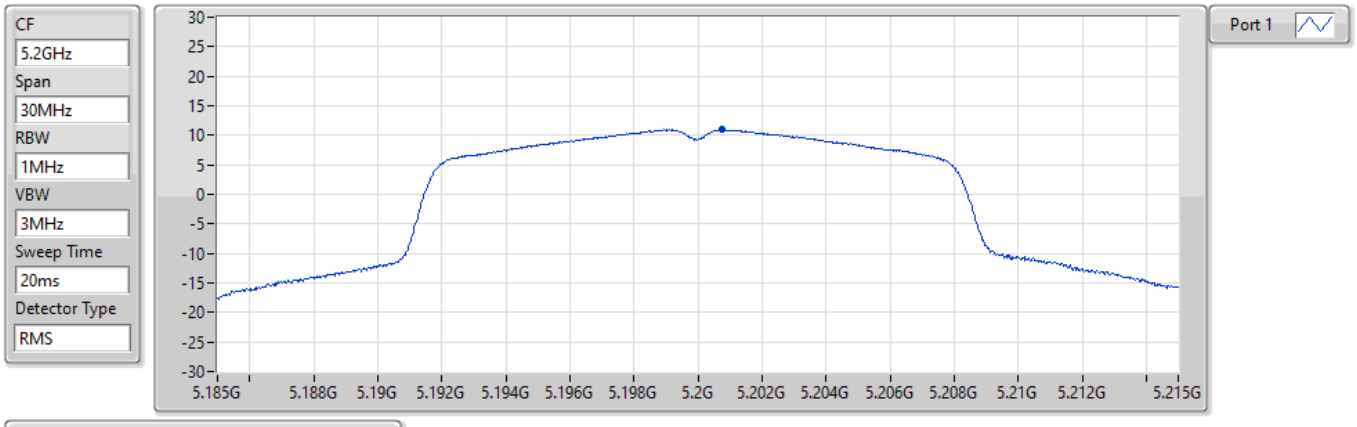

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.95	10.95	10.95

802.11a_Nss1,(6Mbps)_1TX PSD


5240MHz

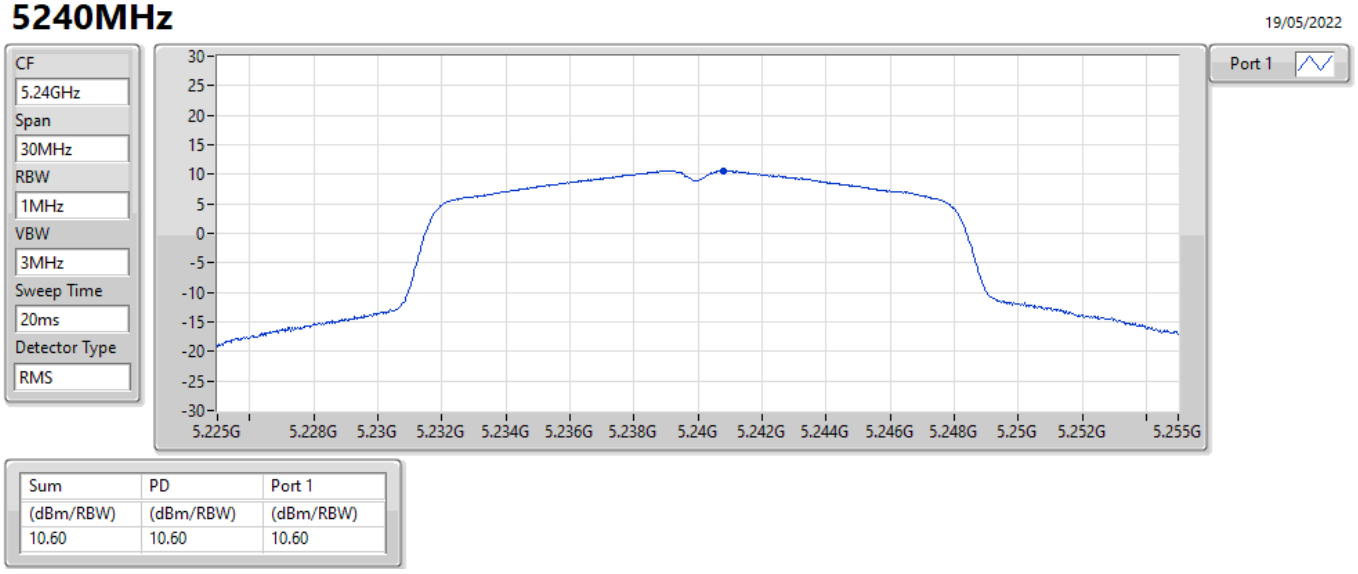

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.60	10.60	10.60

802.11a_Nss1,(6Mbps)_1TX PSD


5260MHz

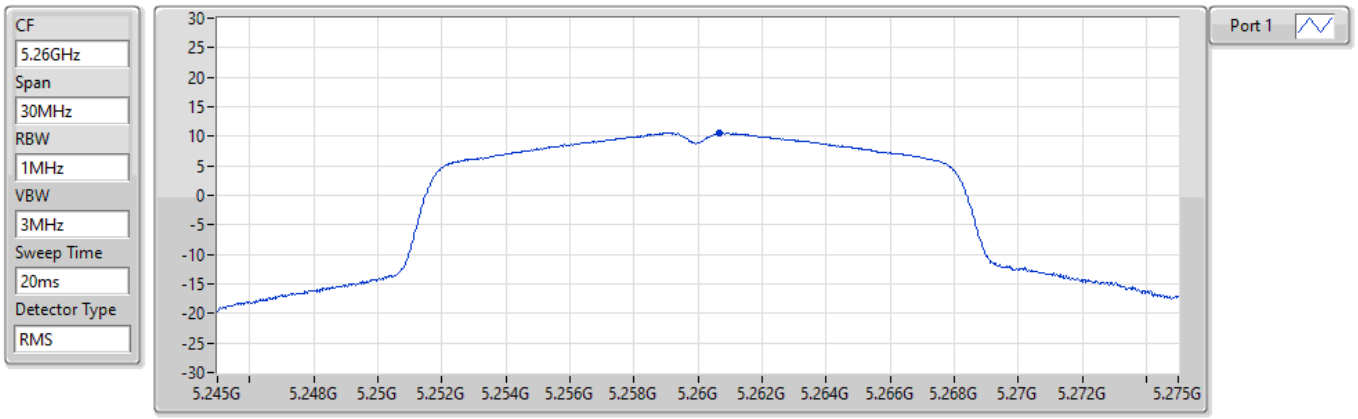

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.57	10.57	10.57

802.11a_Nss1,(6Mbps)_1TX PSD


5300MHz

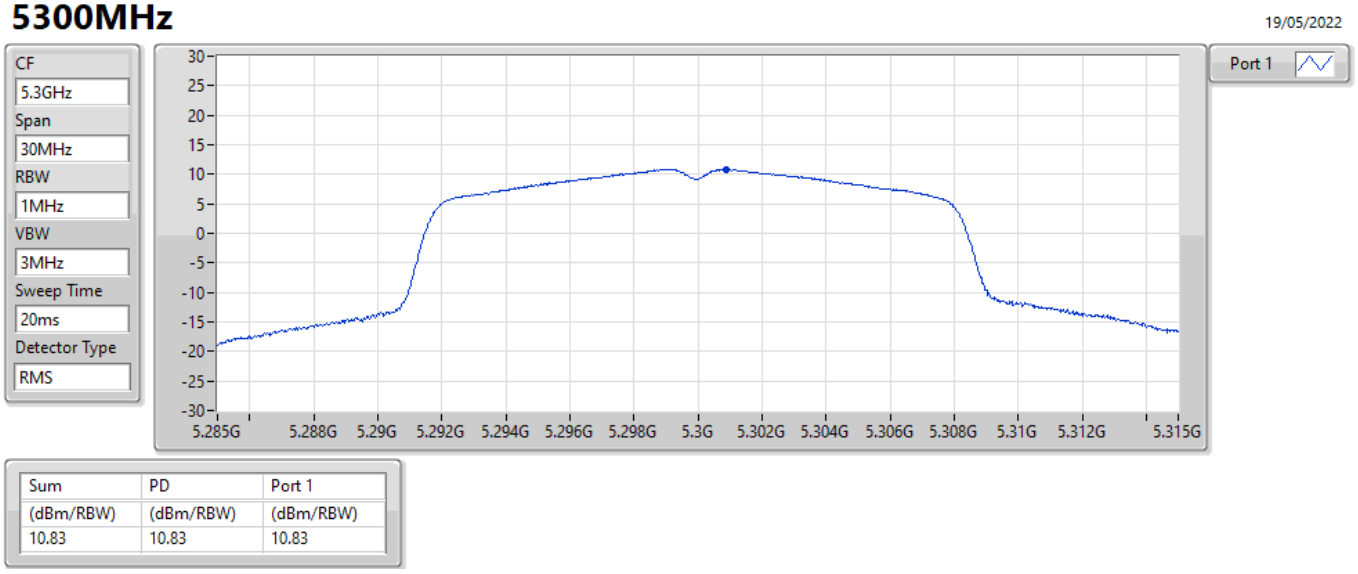

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.83	10.83	10.83

802.11a_Nss1,(6Mbps)_1TX PSD

5320MHz

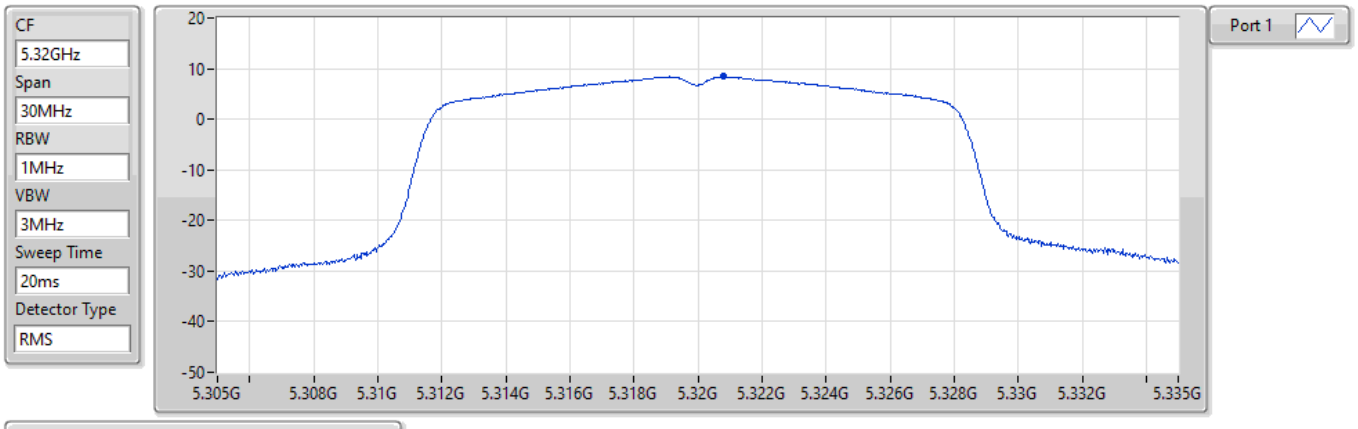


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.41	8.41	8.41

802.11a_Nss1,(6Mbps)_1TX PSD

5500MHz

02/06/2022

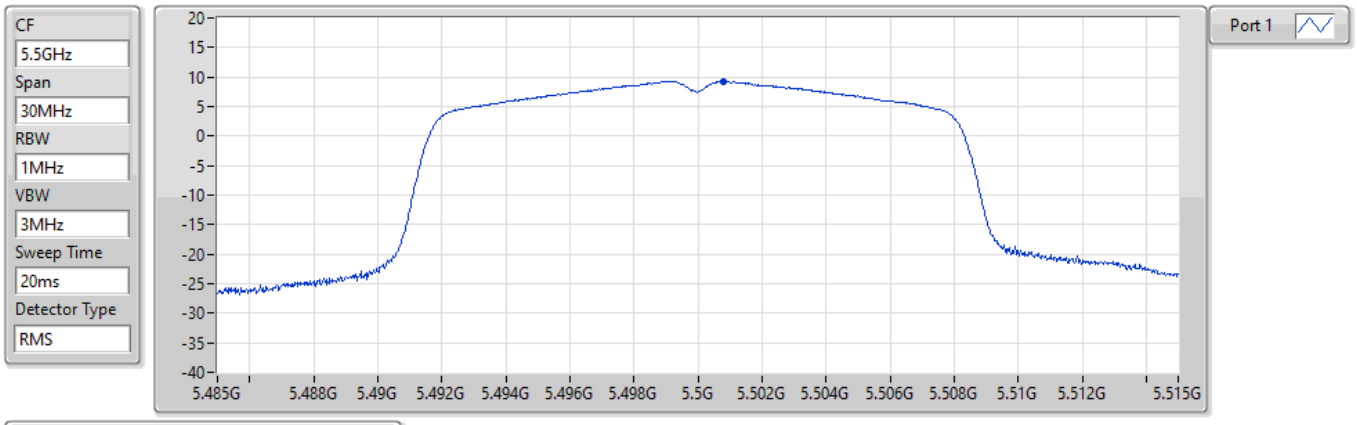


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.27	9.27	9.27

802.11a_Nss1,(6Mbps)_1TX PSD

5580MHz

19/05/2022

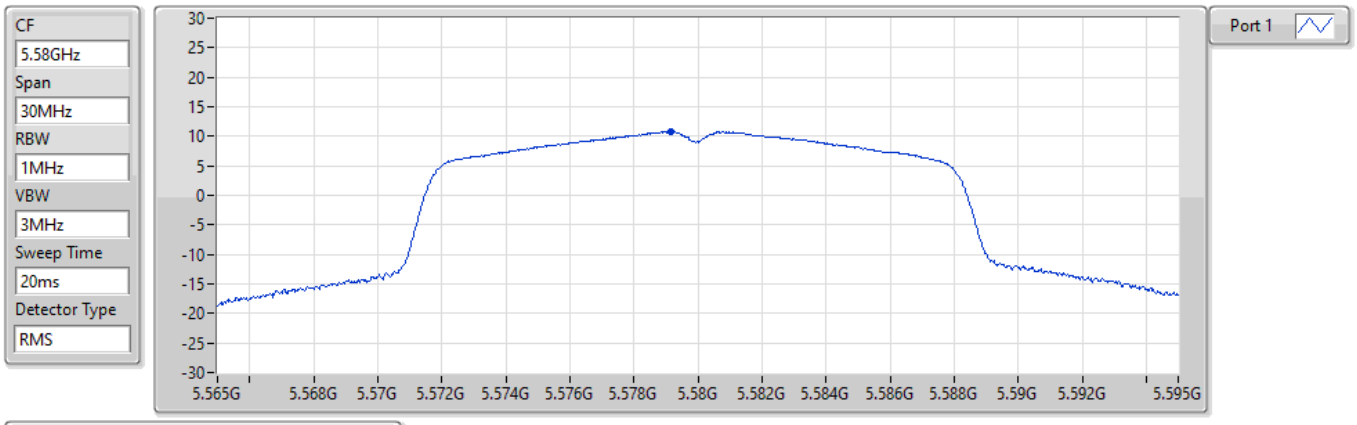


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.77	10.77	10.77

802.11a_Nss1,(6Mbps)_1TX PSD

5700MHz

02/06/2022

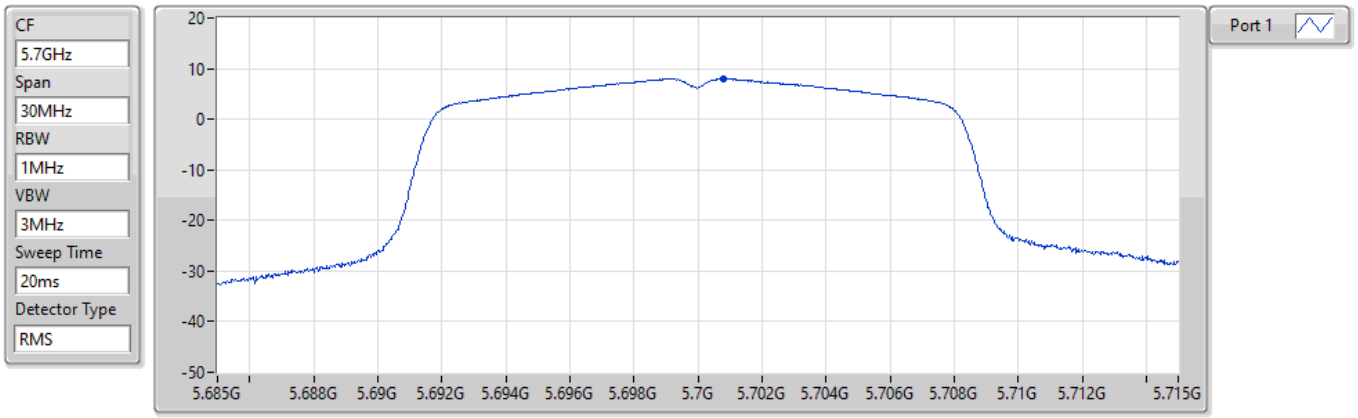


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.02	8.02	8.02

802.11a_Nss1,(6Mbps)_1TX PSD

5720MHz Straddle 5.47-5.725GHz


19/05/2022

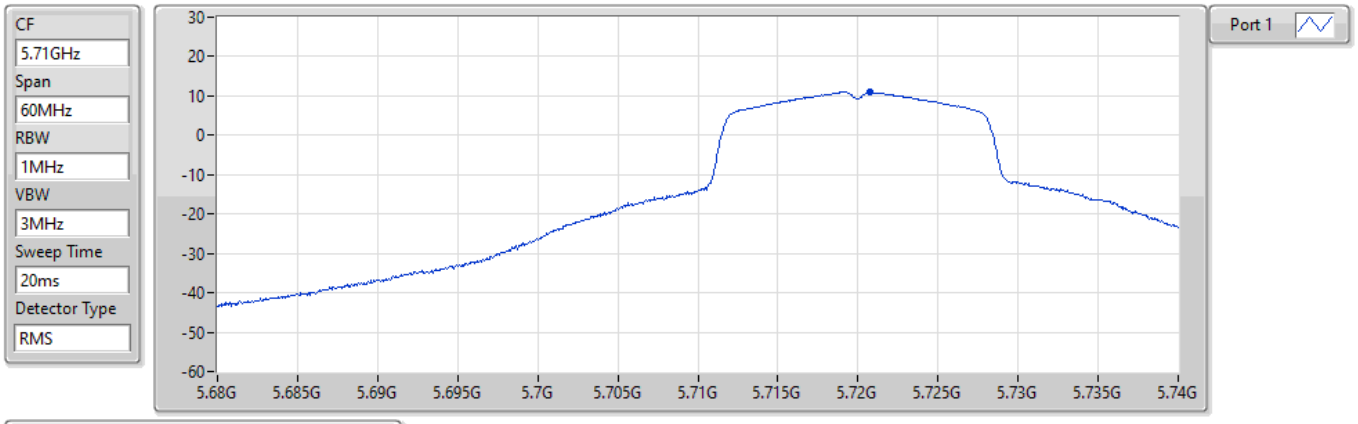

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.93	10.93	10.93

802.11a_Nss1,(6Mbps)_1TX PSD


5720MHz Straddle 5.725-5.85GHz

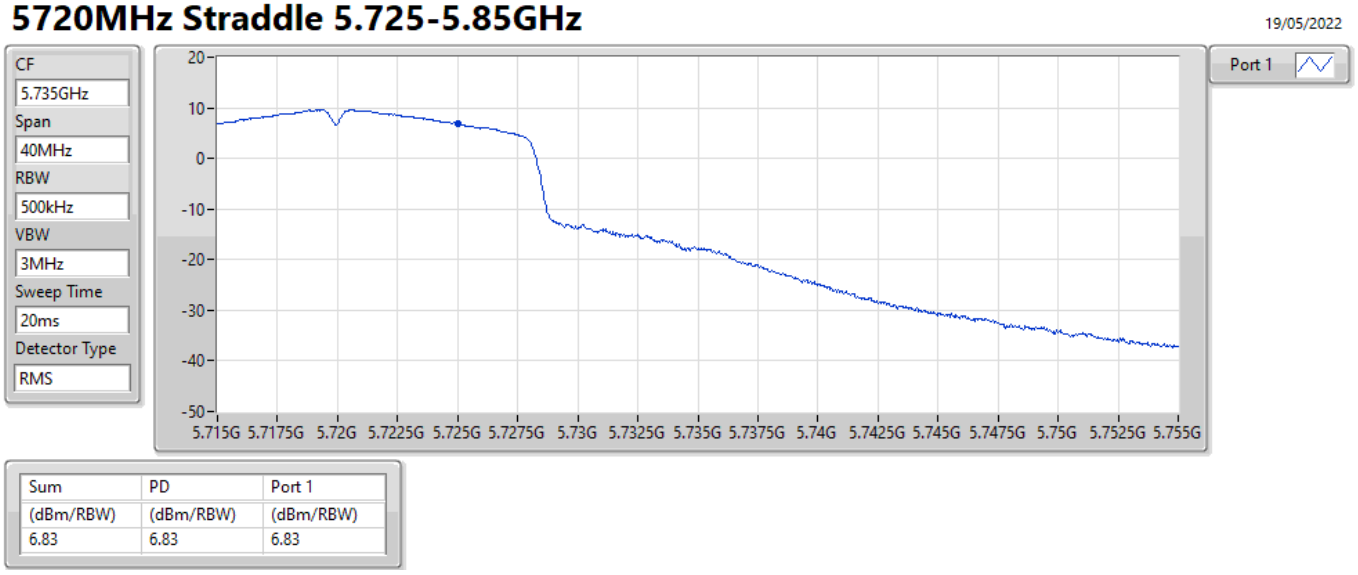

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.83	6.83	6.83

802.11a_Nss1,(6Mbps)_1TX PSD


5745MHz

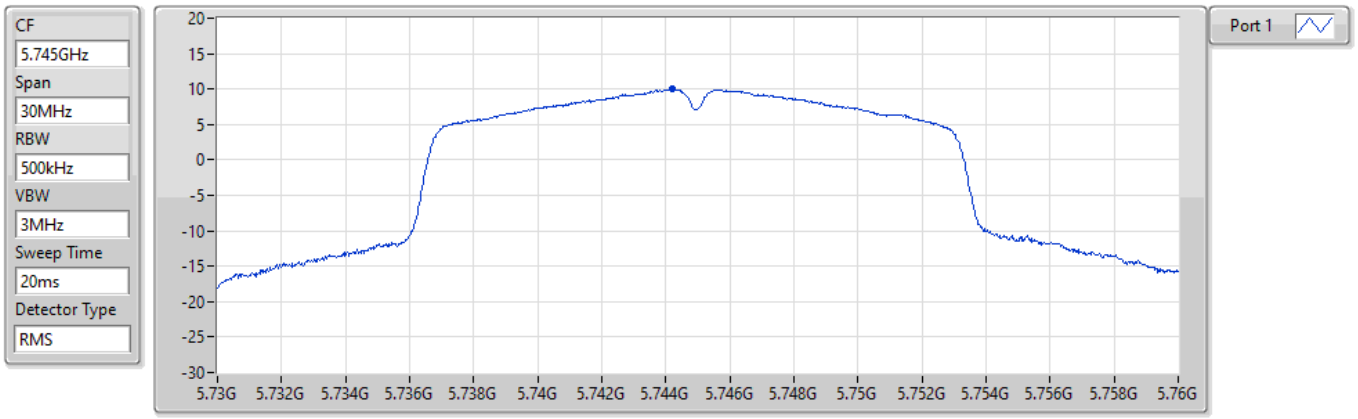

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.96	9.96	9.96

802.11a_Nss1,(6Mbps)_1TX PSD


5785MHz

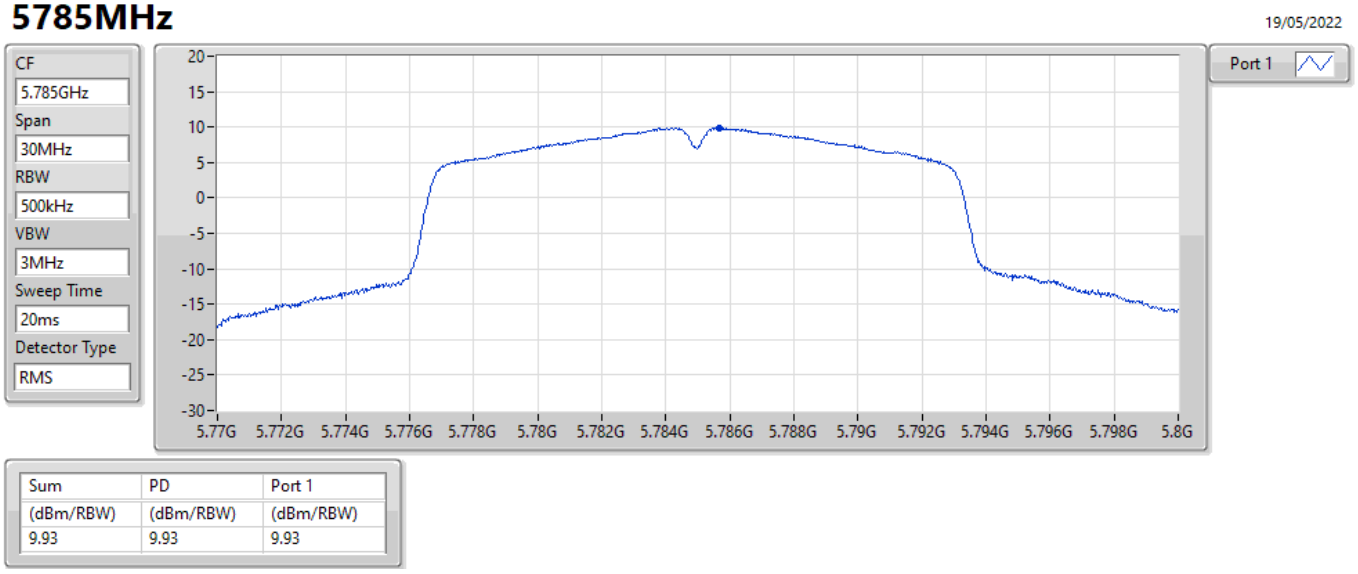

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.93	9.93	9.93

802.11a_Nss1,(6Mbps)_1TX PSD


5825MHz

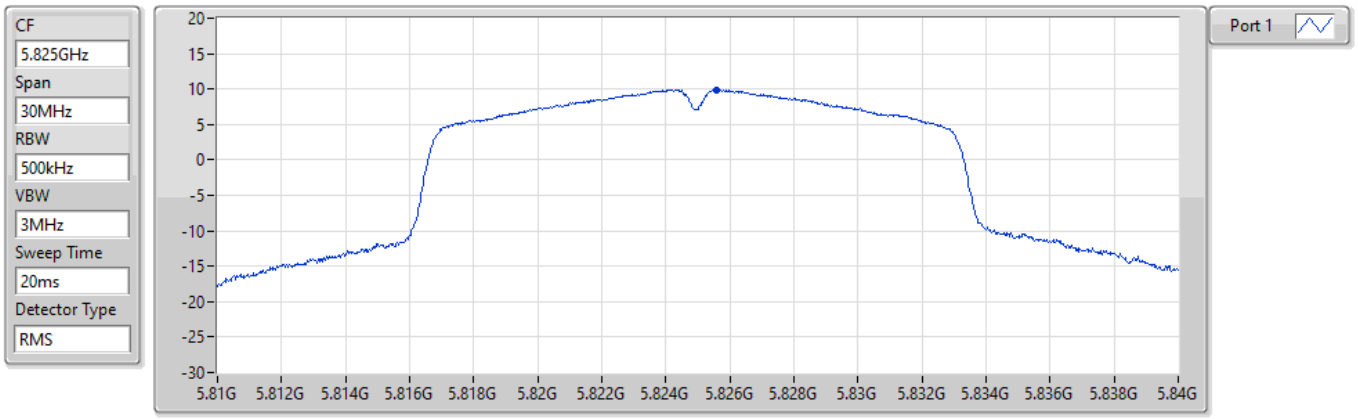

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.88	9.88	9.88

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5180MHz

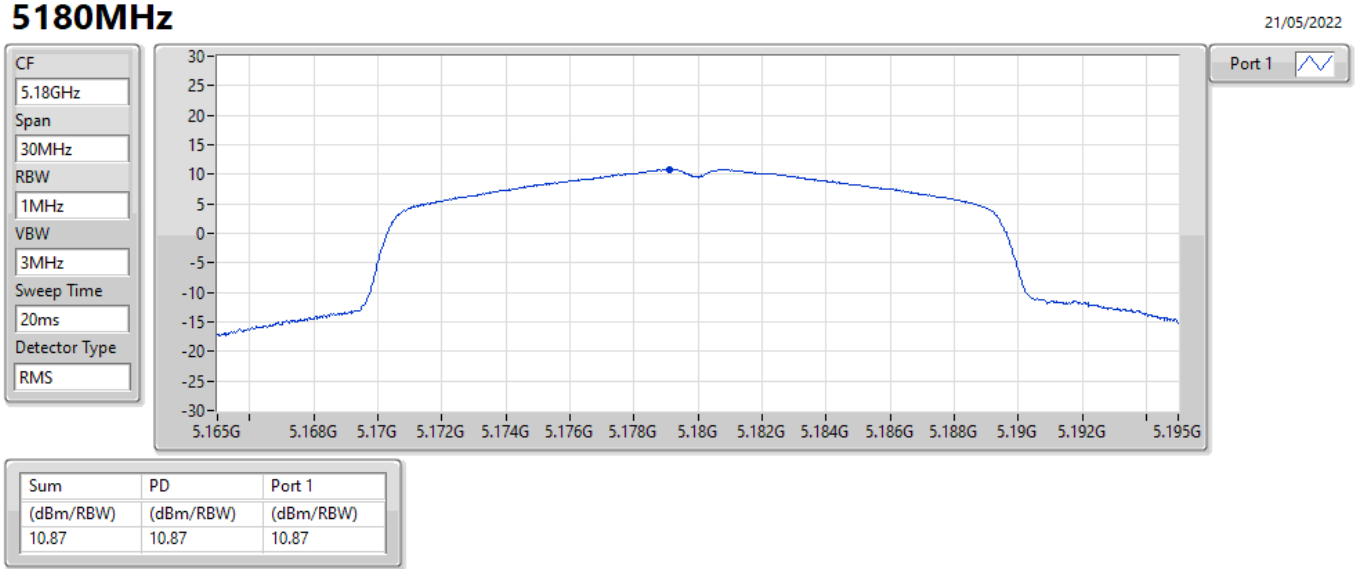

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.87	10.87	10.87

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5200MHz

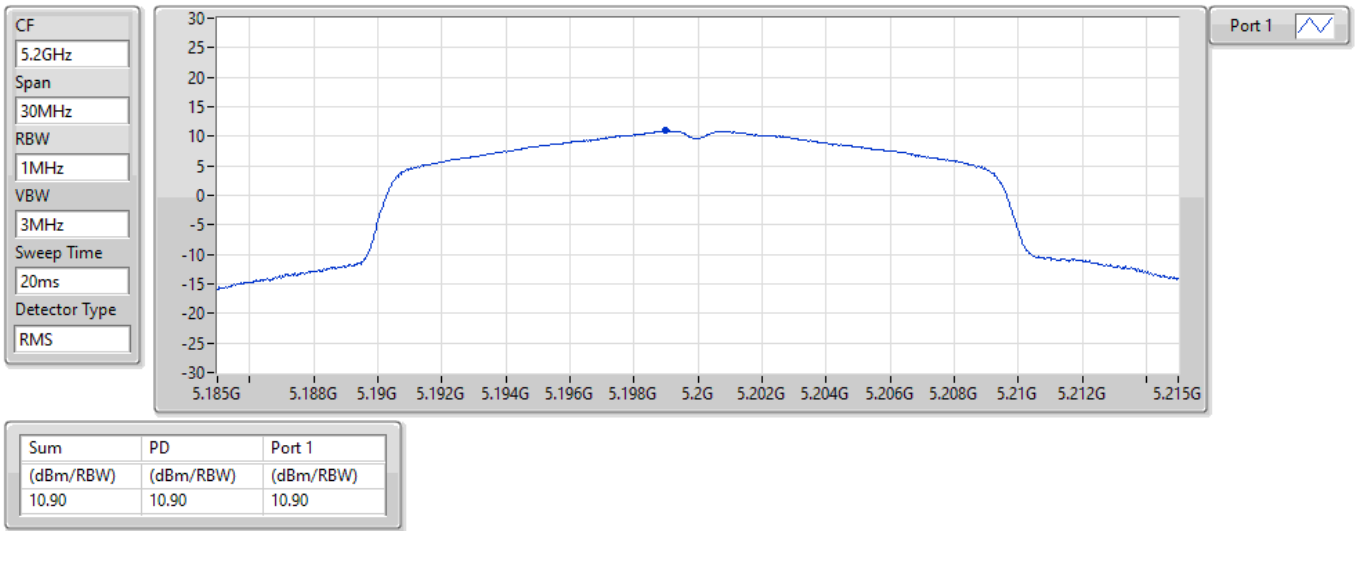

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.90	10.90	10.90

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5240MHz

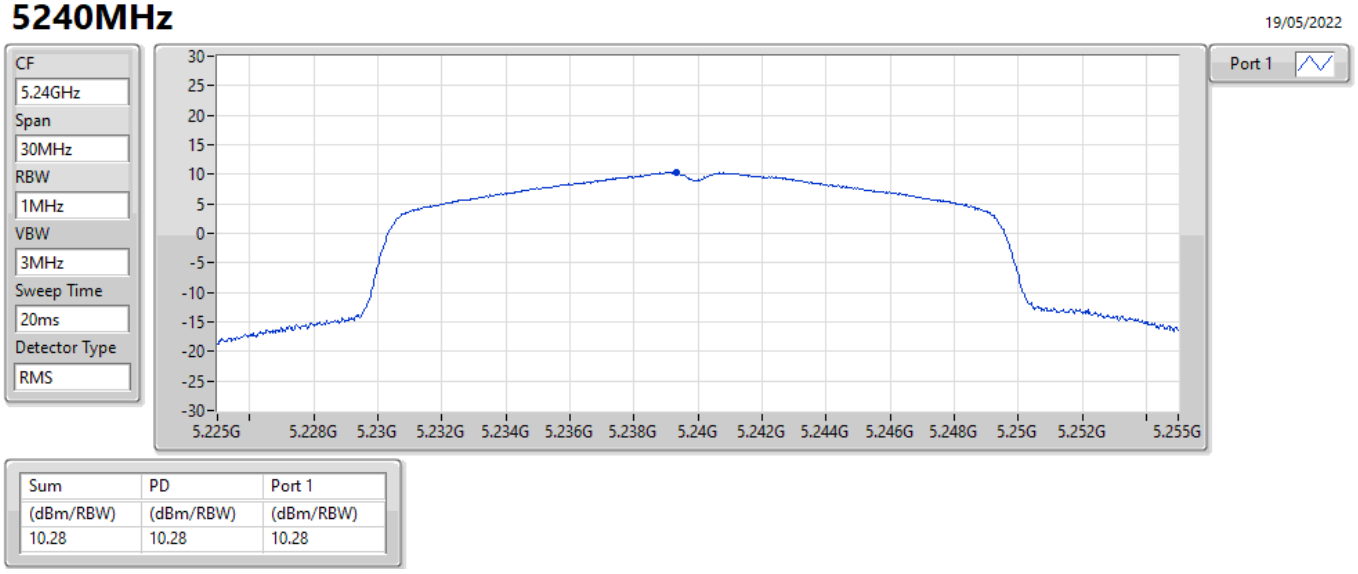

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.28	10.28	10.28

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5260MHz

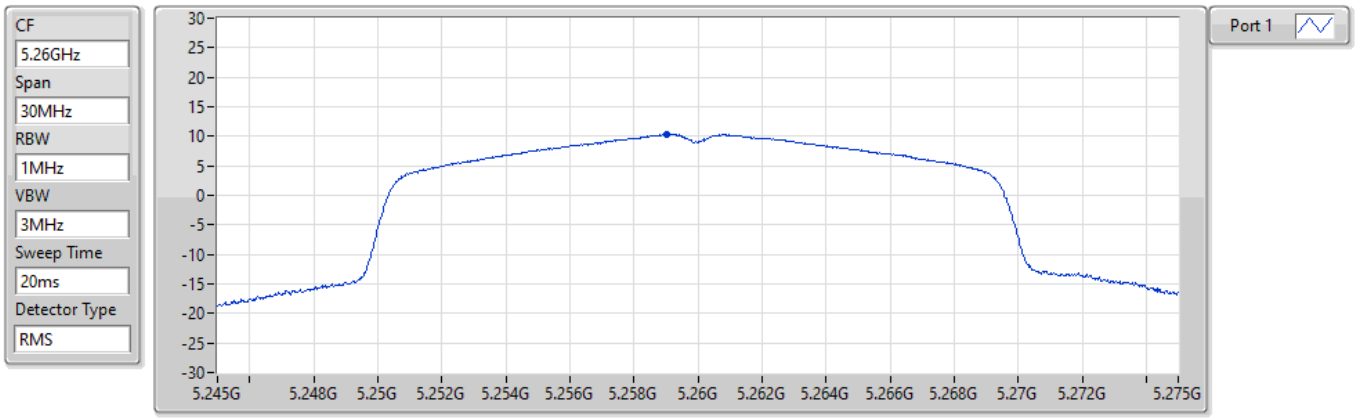

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.31	10.31	10.31

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5300MHz

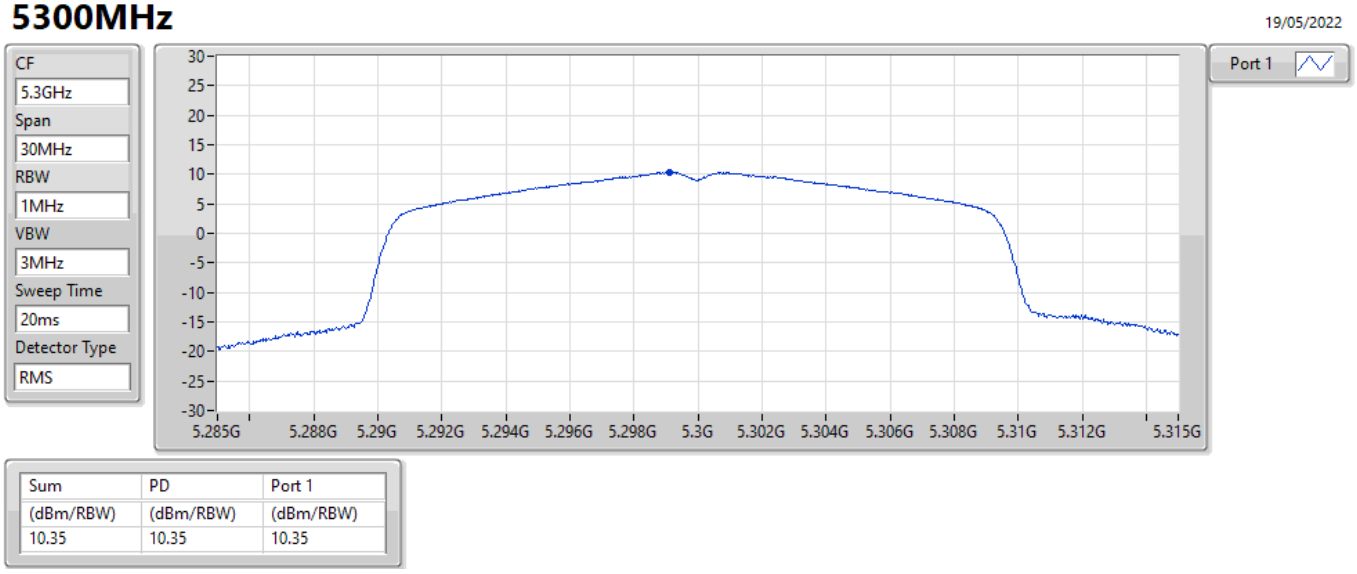

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.35	10.35	10.35

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5320MHz

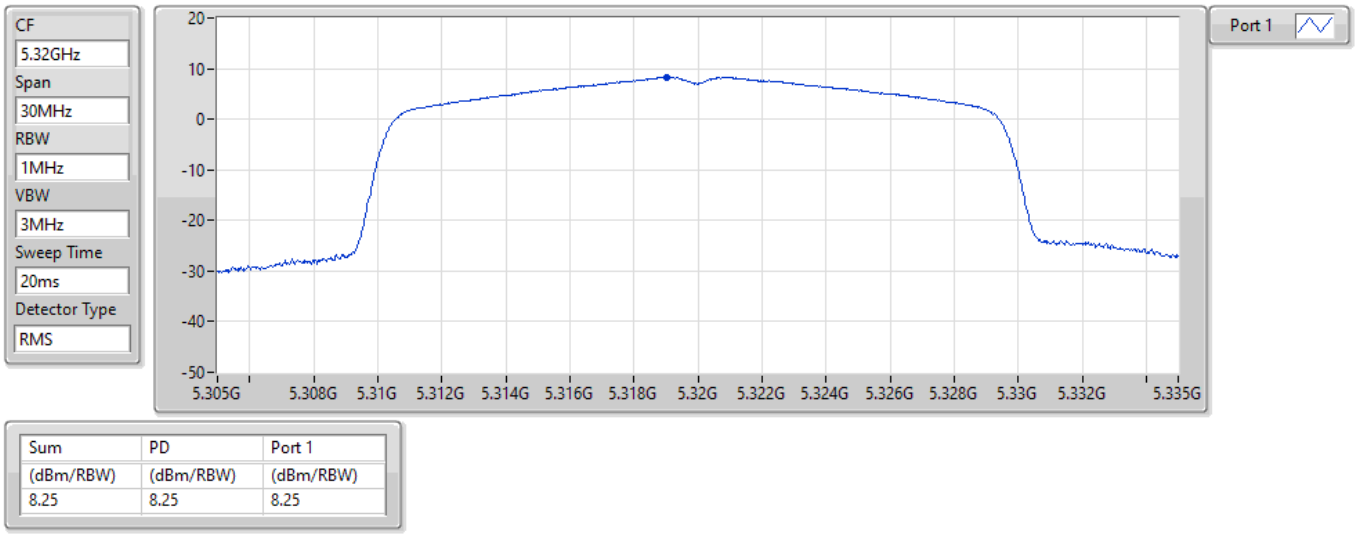

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.25	8.25	8.25

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5500MHz

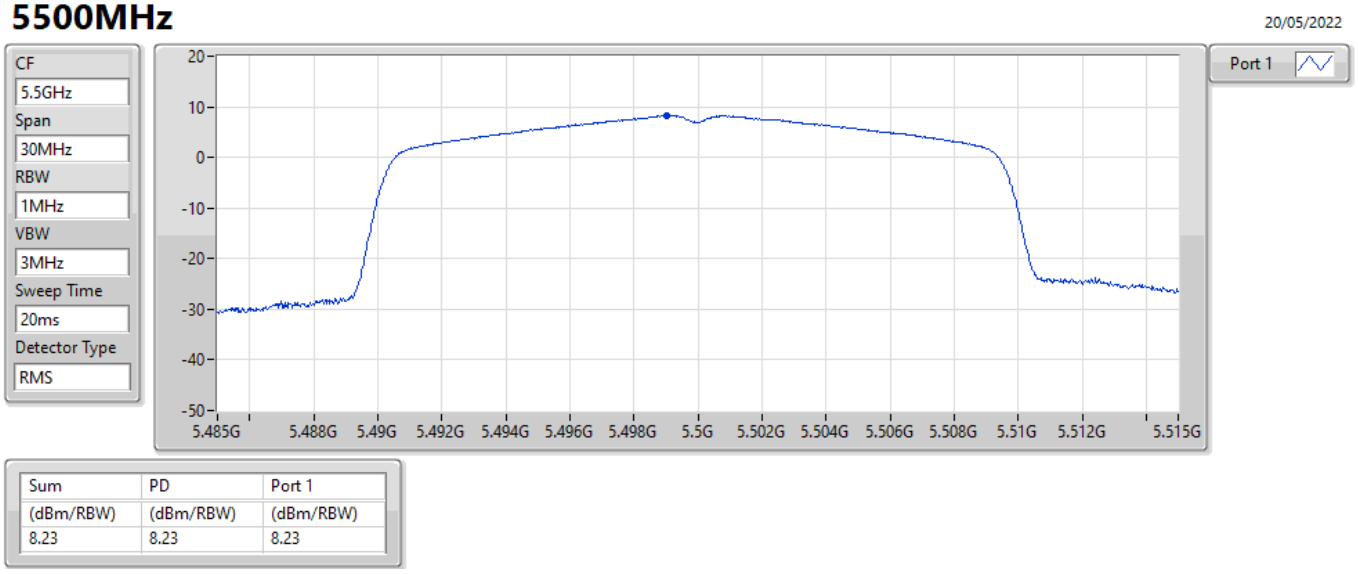

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.23	8.23	8.23

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5580MHz

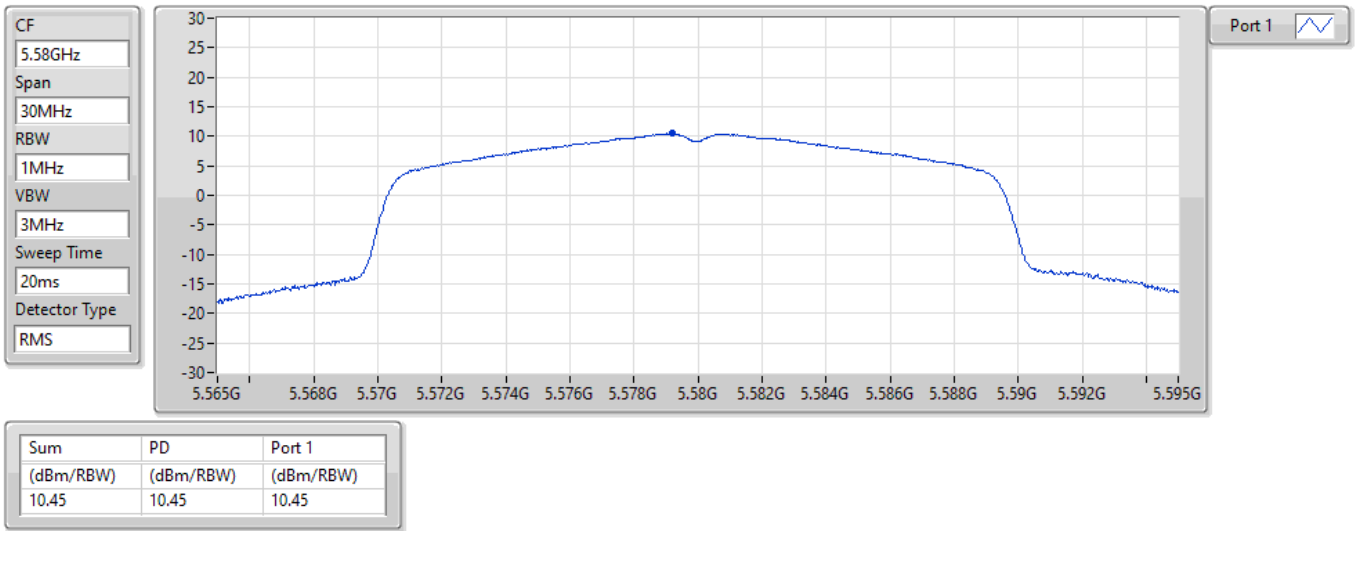

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.45	10.45	10.45

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5700MHz

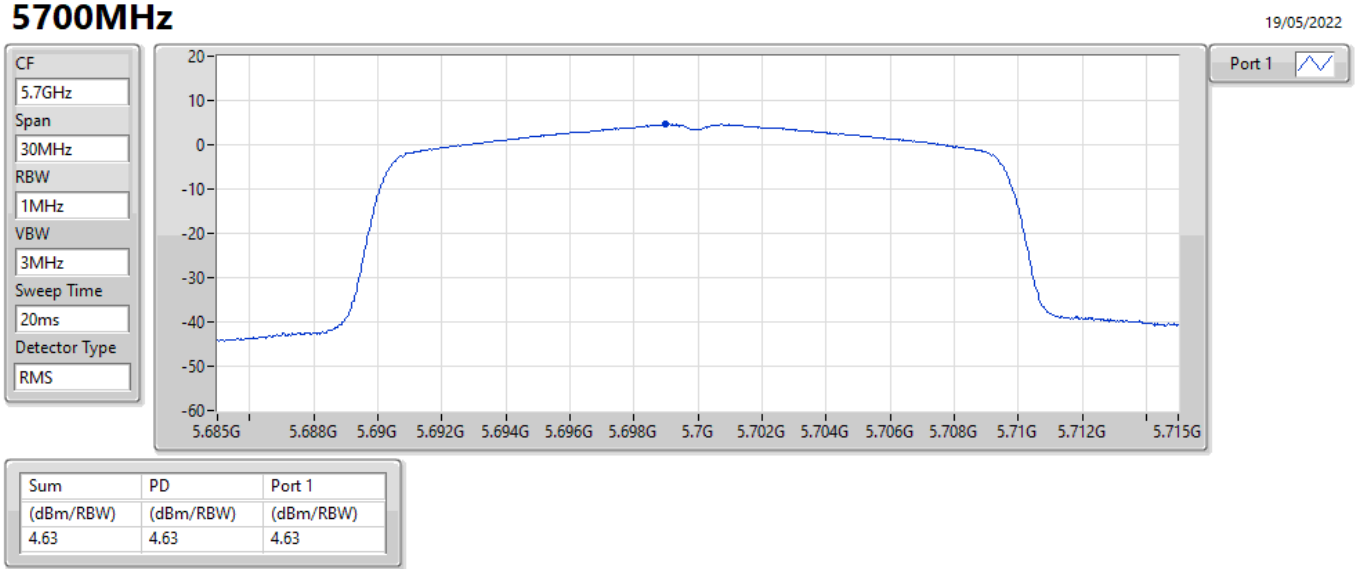

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.63	4.63	4.63

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.47-5.725GHz

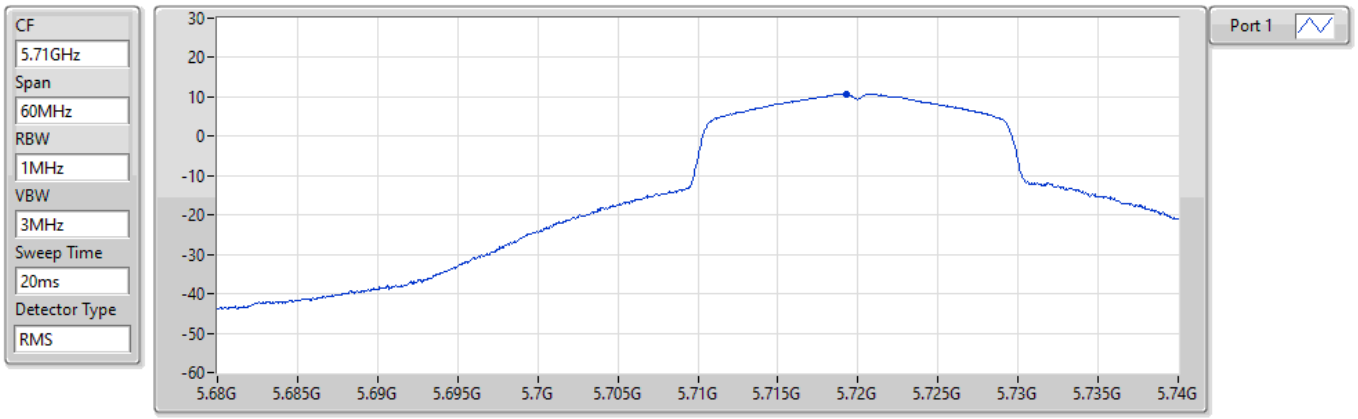

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.76	10.76	10.76

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.725-5.85GHz

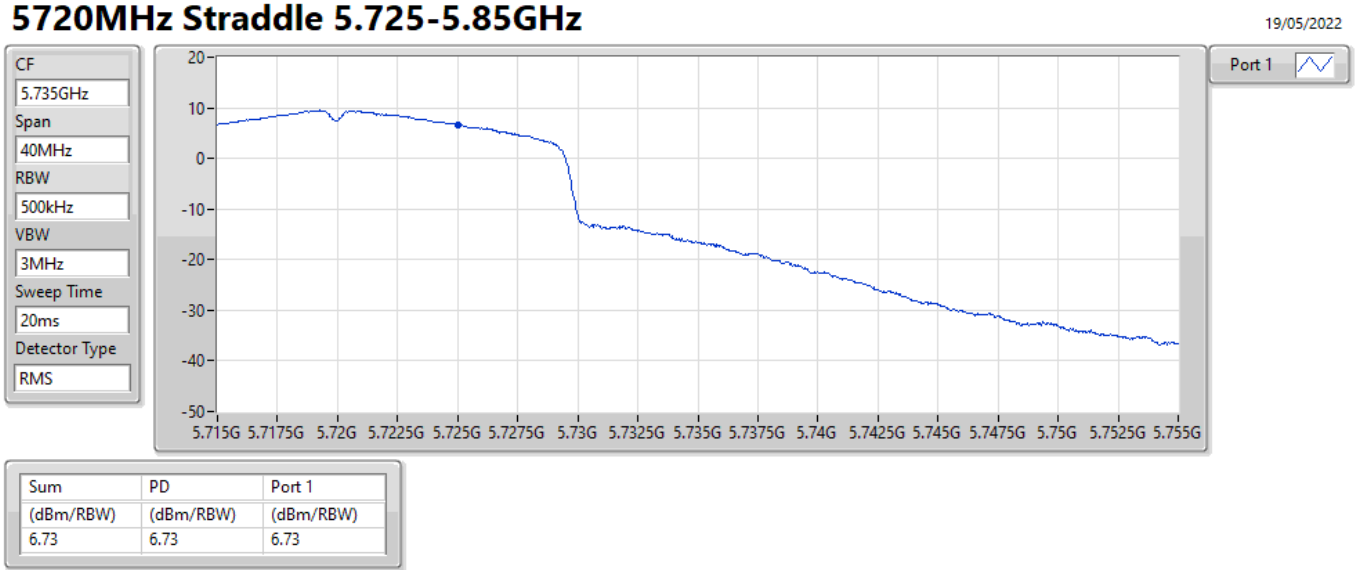

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.73	6.73	6.73

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5745MHz

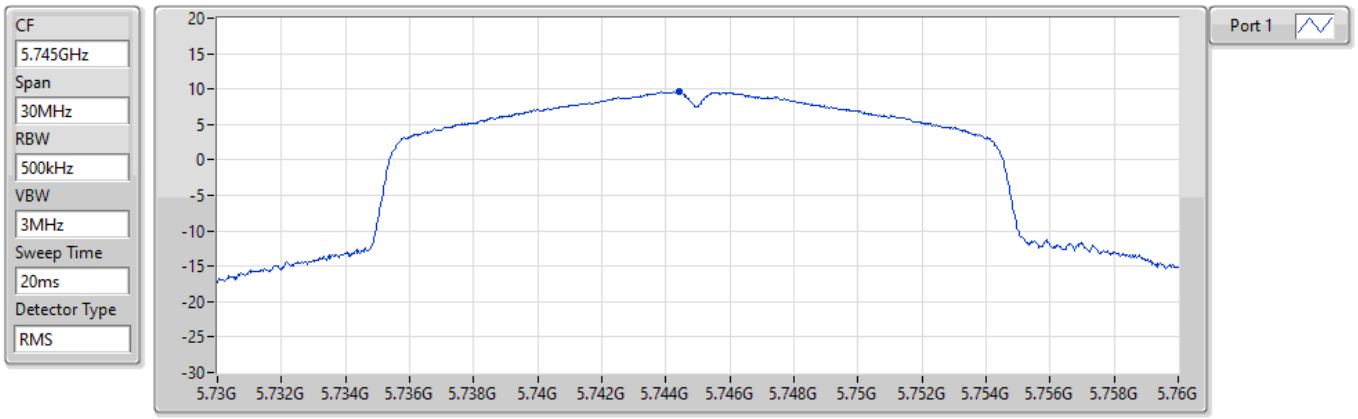

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.65	9.65	9.65

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5785MHz

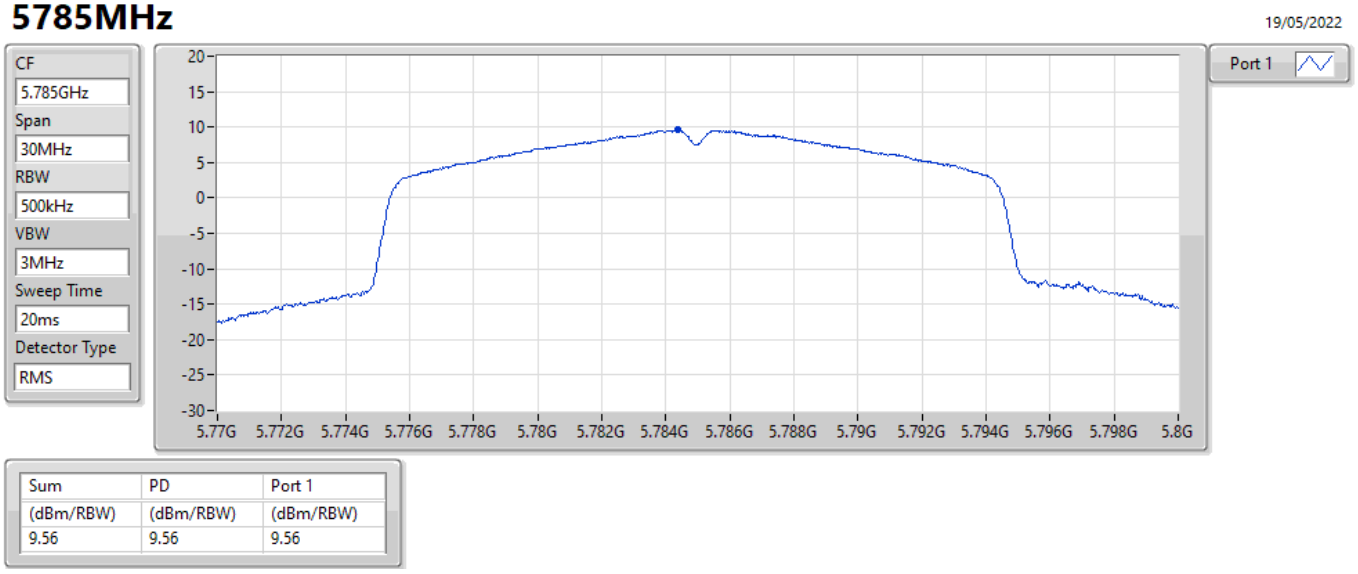

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.56	9.56	9.56

802.11ax HEW20_Nss1,(MCS0)_1TX PSD

5825MHz

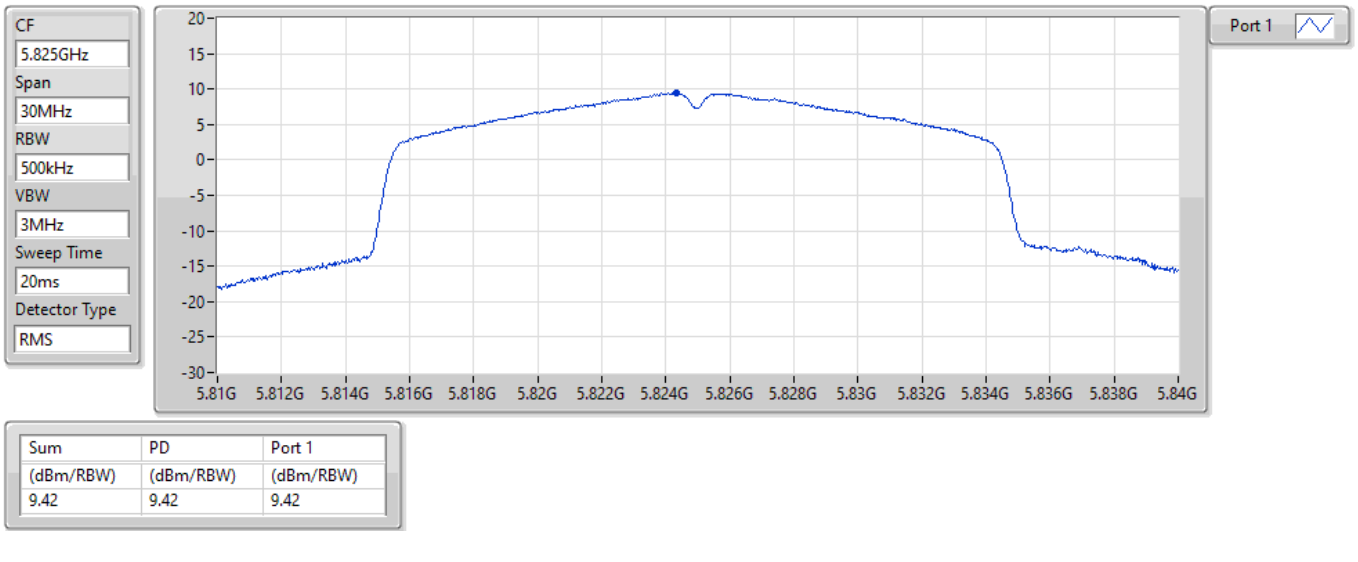


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.42	9.42	9.42

802.11ax HEW40_Nss1,(MCS0)_1TX PSD

5190MHz

02/06/2022

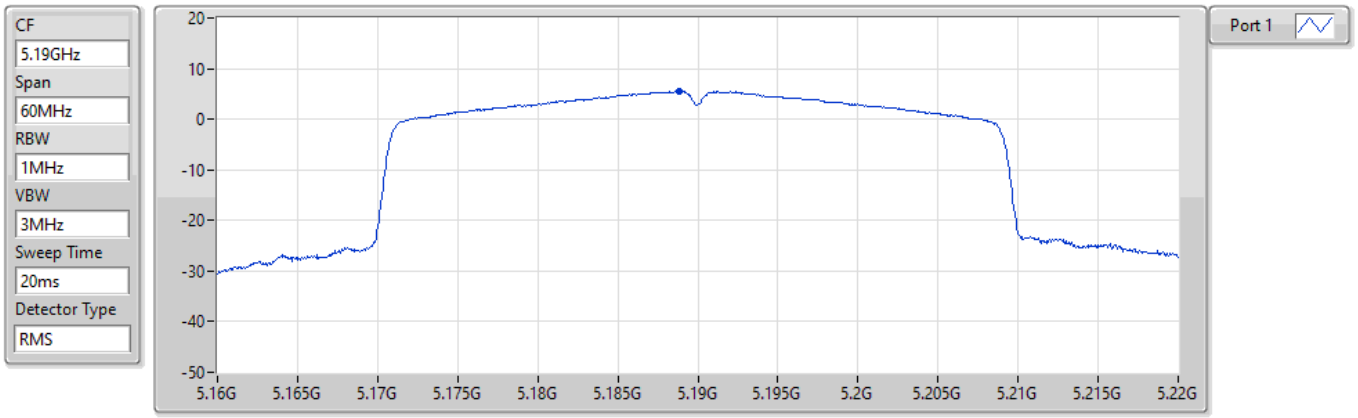


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.53	5.53	5.53

802.11ax HEW40_Nss1,(MCS0)_1TX PSD

5230MHz


19/05/2022

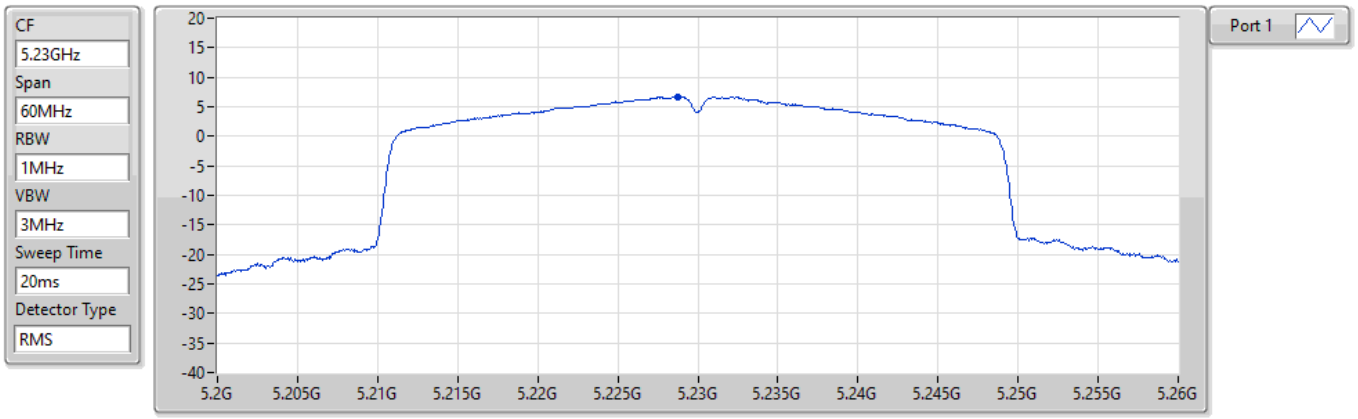

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.66	6.66	6.66

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5270MHz

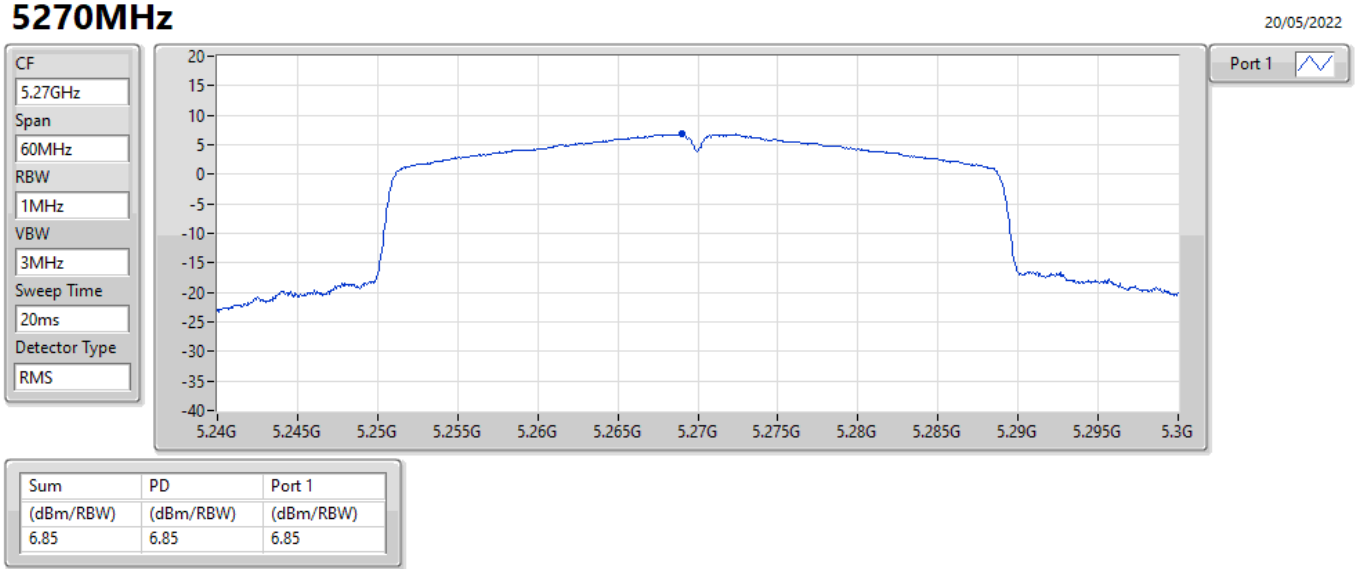

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.85	6.85	6.85

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5310MHz

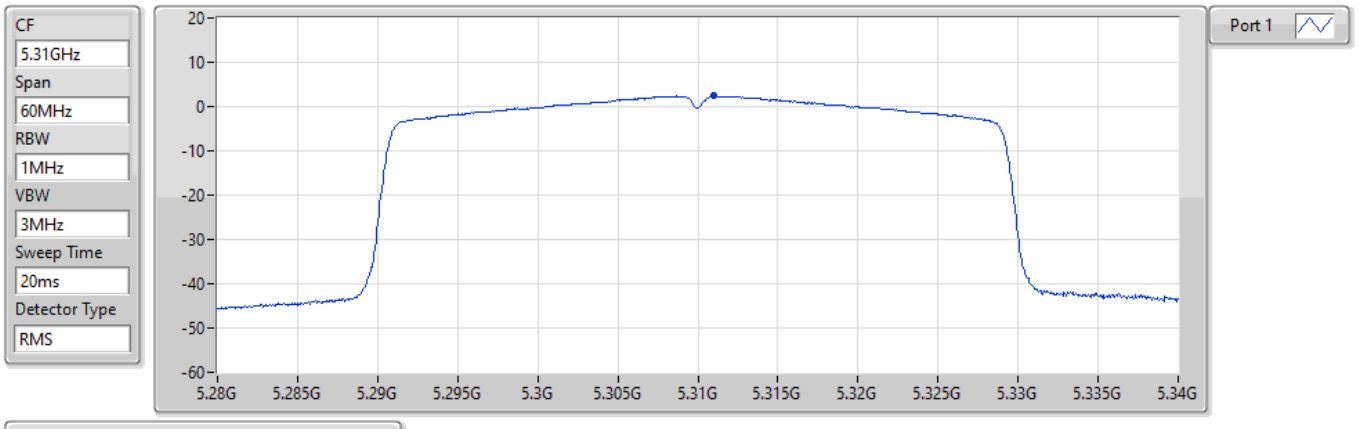

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.40	2.40	2.40

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5510MHz

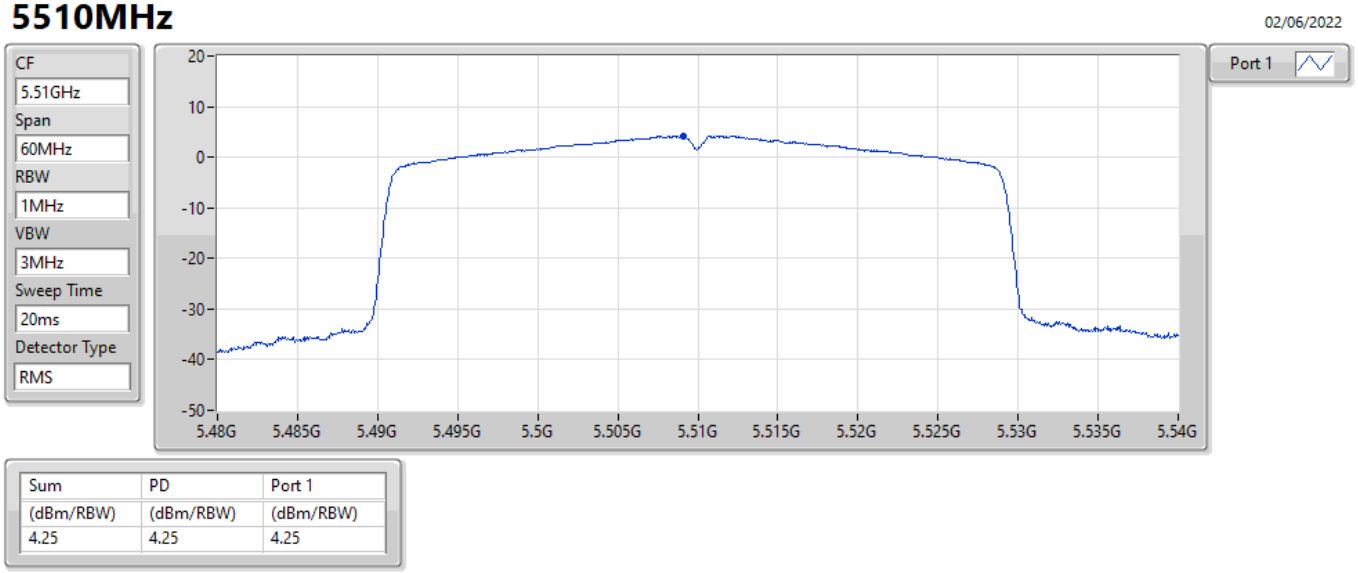

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.25	4.25	4.25

802.11ax HEW40_Nss1,(MCS0)_1TX PSD

5550MHz

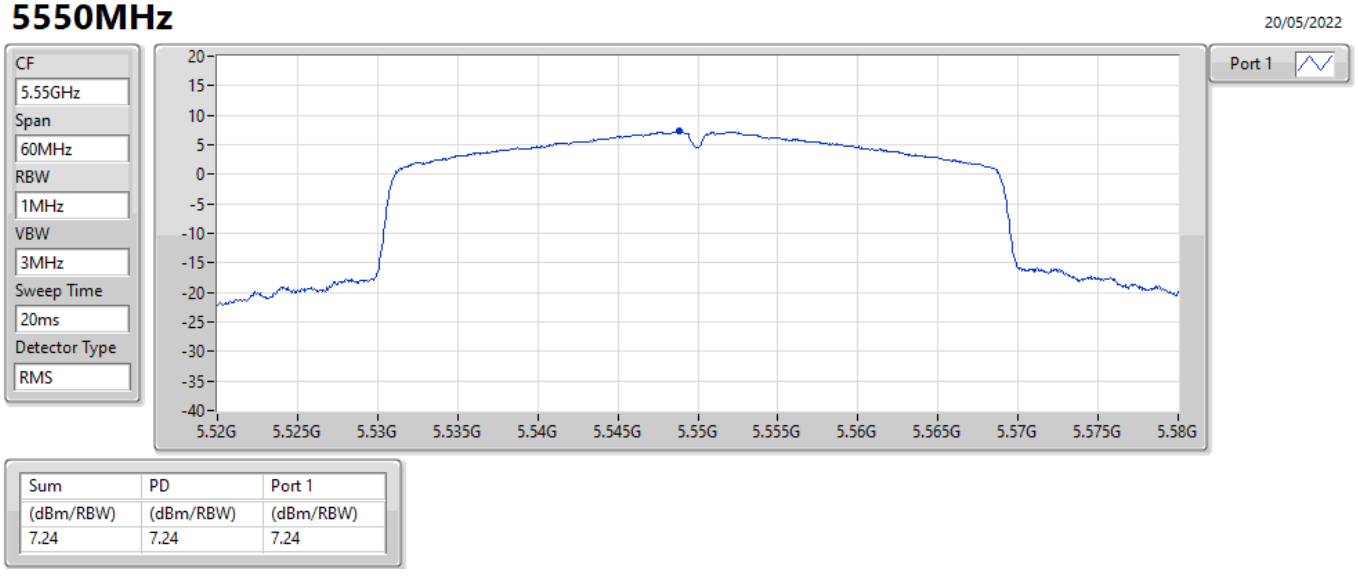


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.24	7.24	7.24

802.11ax HEW40_Nss1,(MCS0)_1TX PSD

5670MHz

02/06/2022

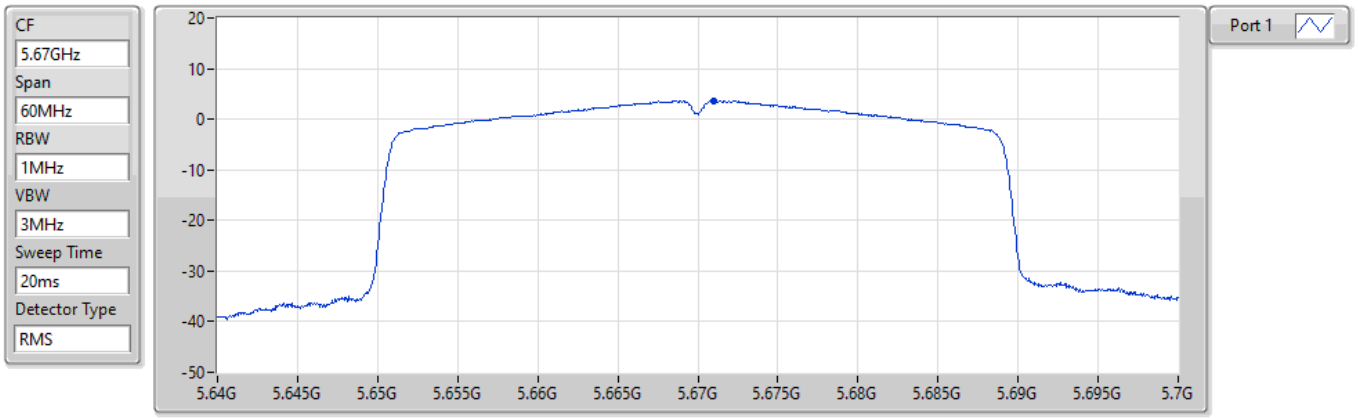


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.62	3.62	3.62

802.11ax HEW40_Nss1,(MCS0)_1TX PSD

5710MHz Straddle 5.47-5.725GHz

19/05/2022

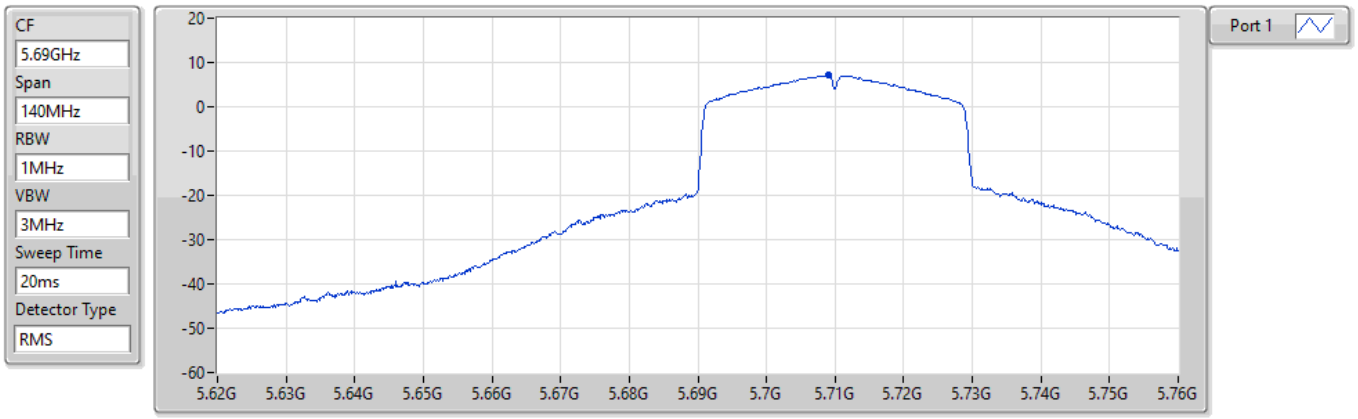


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.07	7.07	7.07

802.11ax HEW40_Nss1,(MCS0)_1TX PSD

5710MHz Straddle 5.725-5.85GHz

19/05/2022

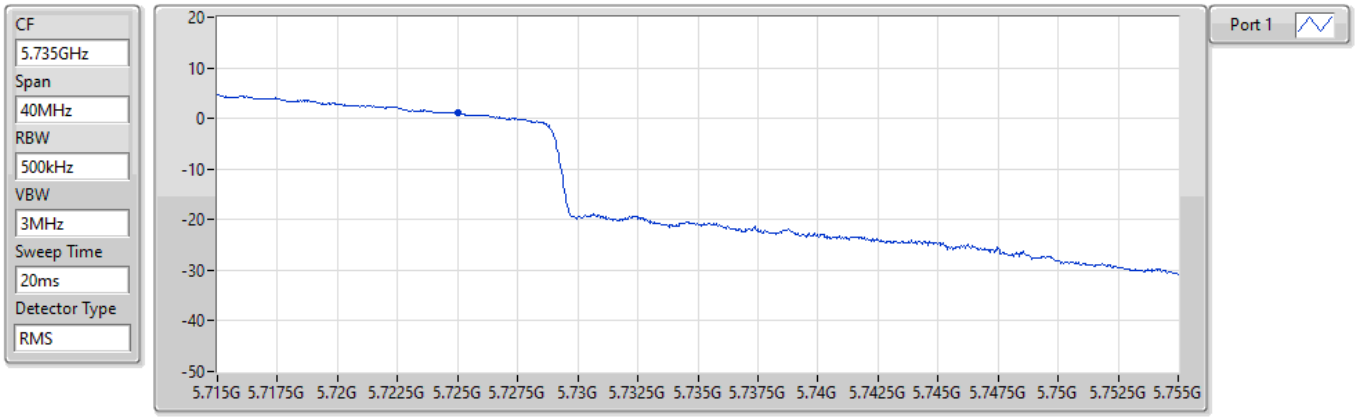


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.00	1.00	1.00

802.11ax HEW40_Nss1,(MCS0)_1TX PSD

5755MHz


20/05/2022

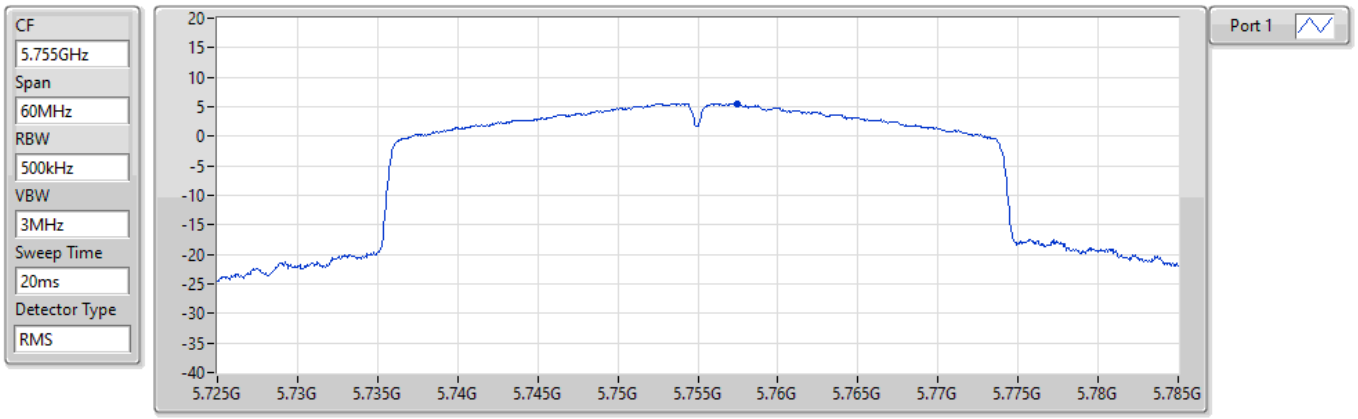

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.55	5.55	5.55

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5795MHz

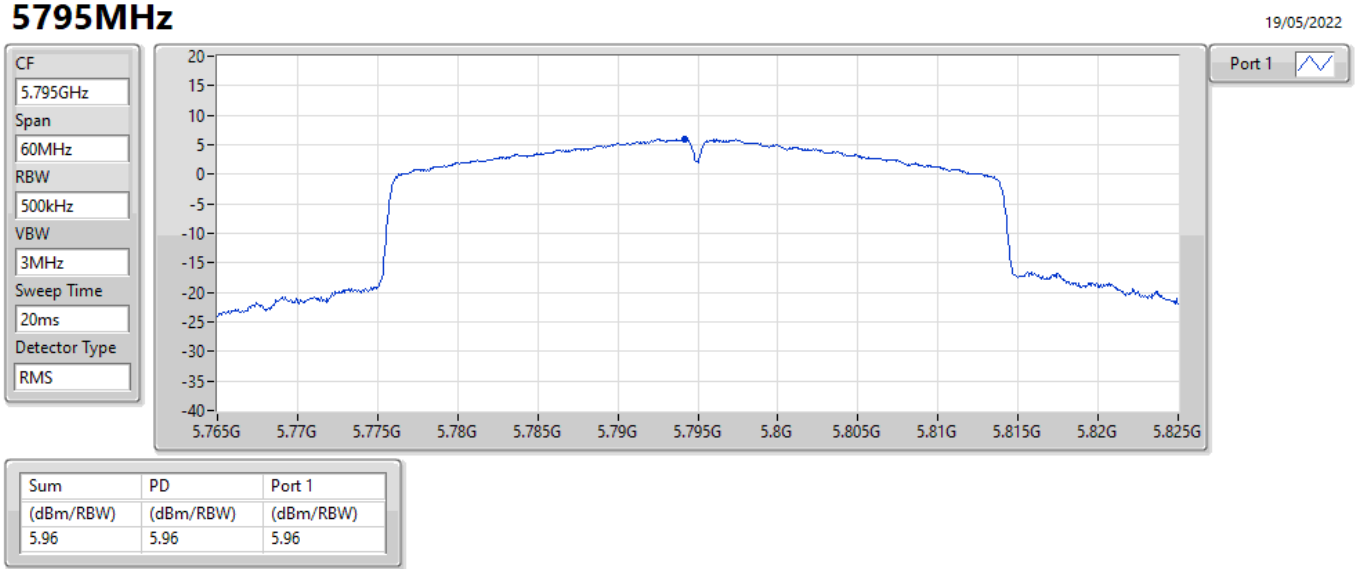

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.96	5.96	5.96

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5210MHz

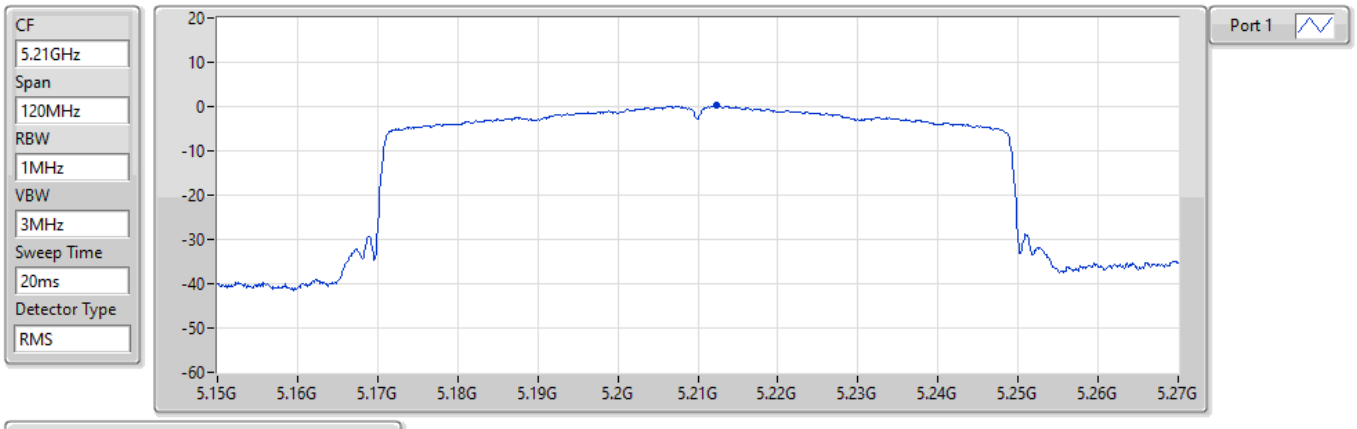

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.28	0.28	0.28

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5290MHz

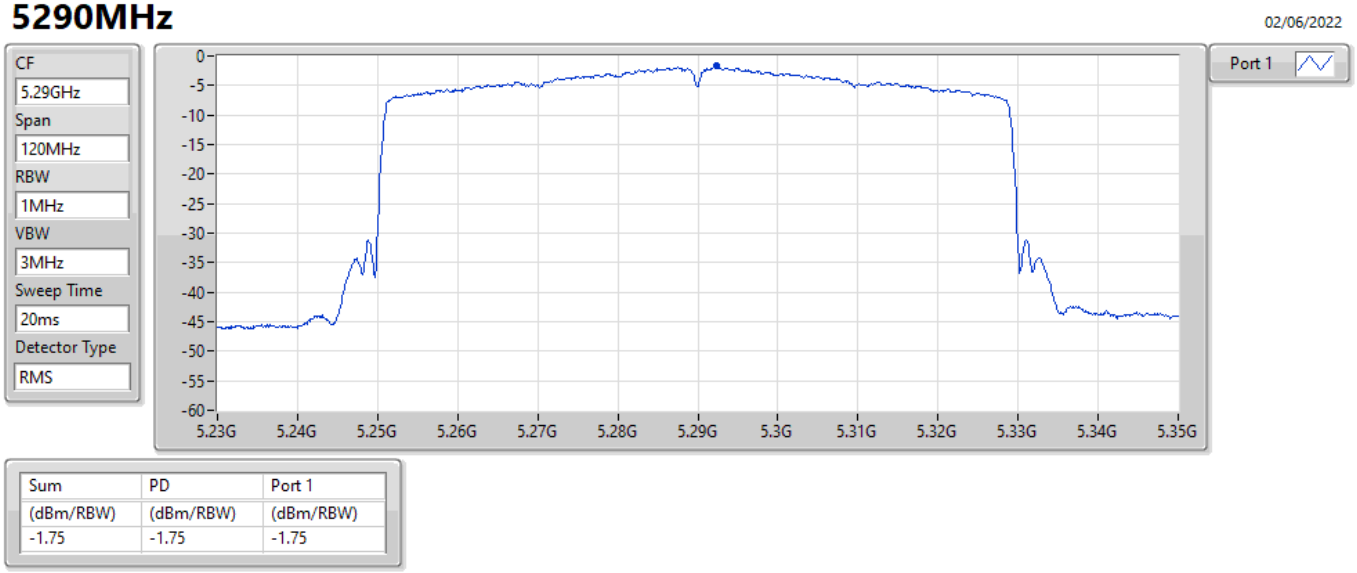

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.75	-1.75	-1.75

802.11ax HEW80_Nss1,(MCS0)_1TX PSD

5530MHz

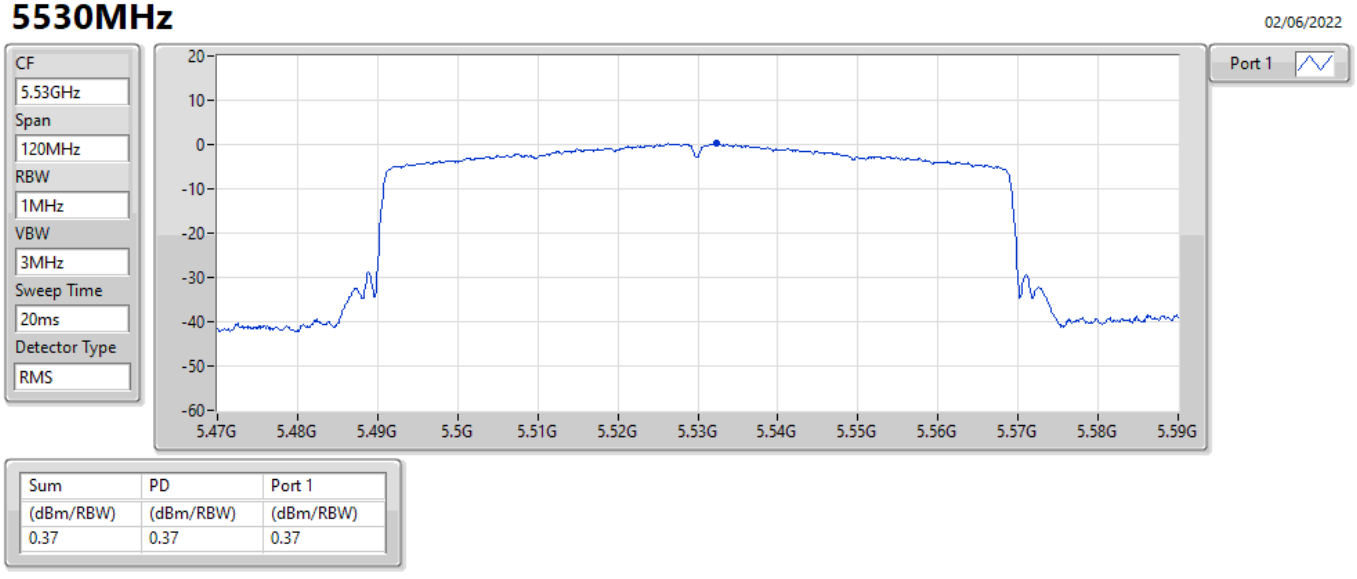


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.37	0.37	0.37

802.11ax HEW80_Nss1,(MCS0)_1TX PSD

5610MHz

02/06/2022

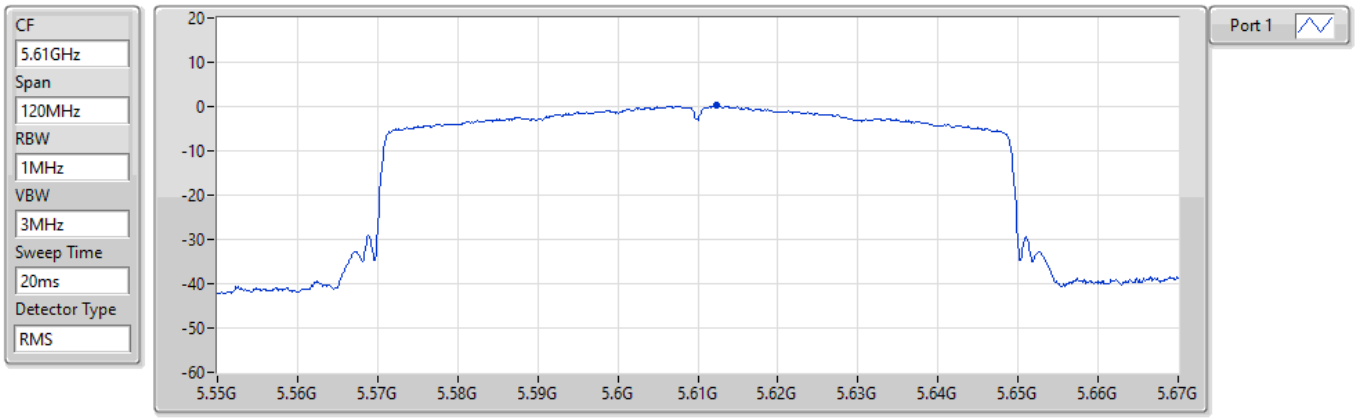


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.34	0.34	0.34

802.11ax HEW80_Nss1,(MCS0)_1TX PSD

5690MHz Straddle 5.47-5.725GHz


20/05/2022

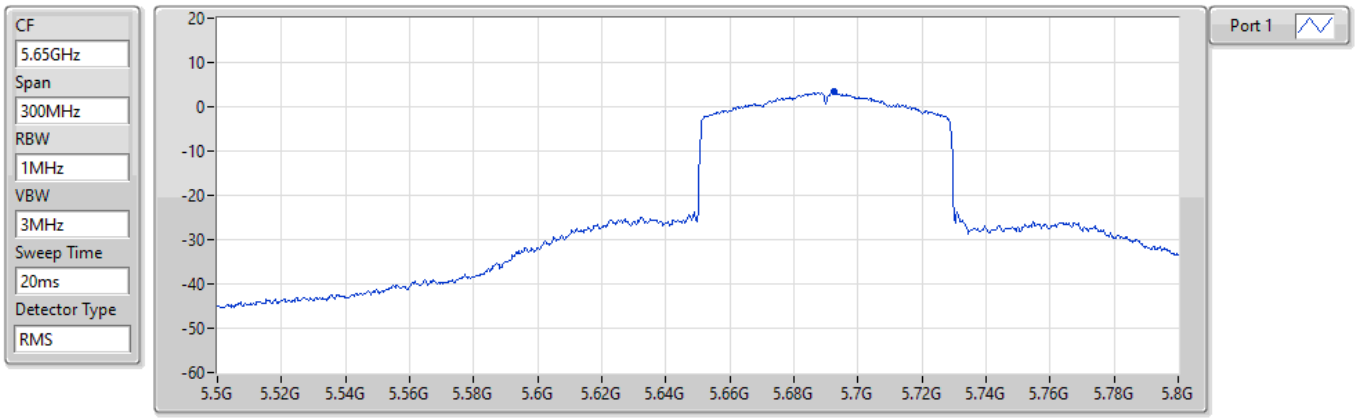

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.36	3.36	3.36

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5690MHz Straddle 5.725-5.85GHz

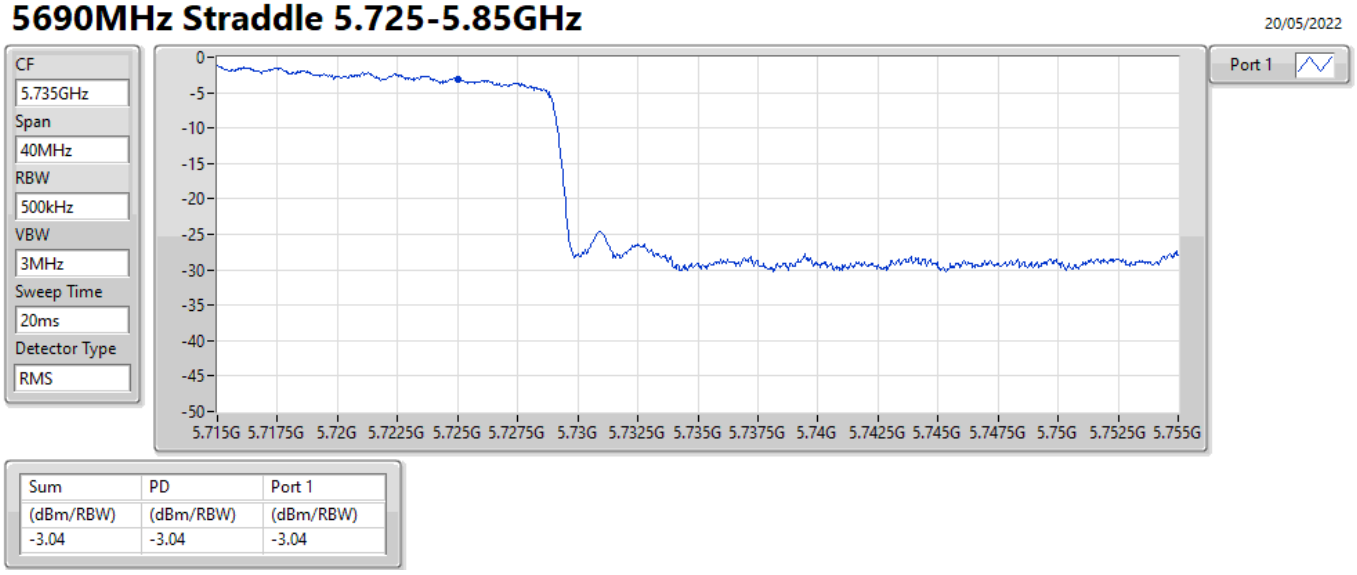

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.04	-3.04	-3.04

802.11ax HEW80_Nss1,(MCS0)_1TX PSD

5775MHz

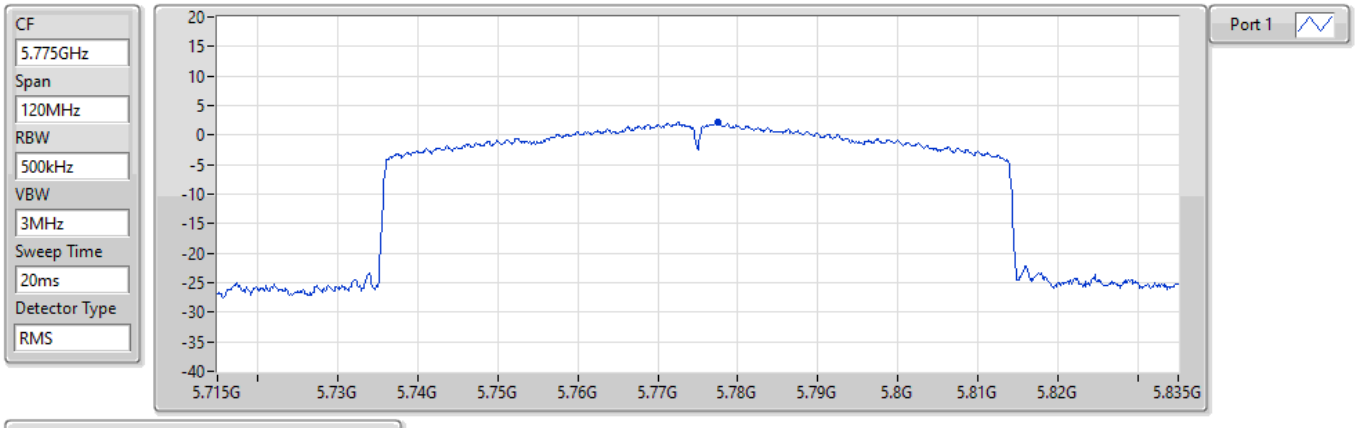


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.30	2.30	2.30

802.11ax HEW160_Nss1,(MCS0)_1TX PSD

5250MHz Straddle 5.15-5.25GHz

02/06/2022

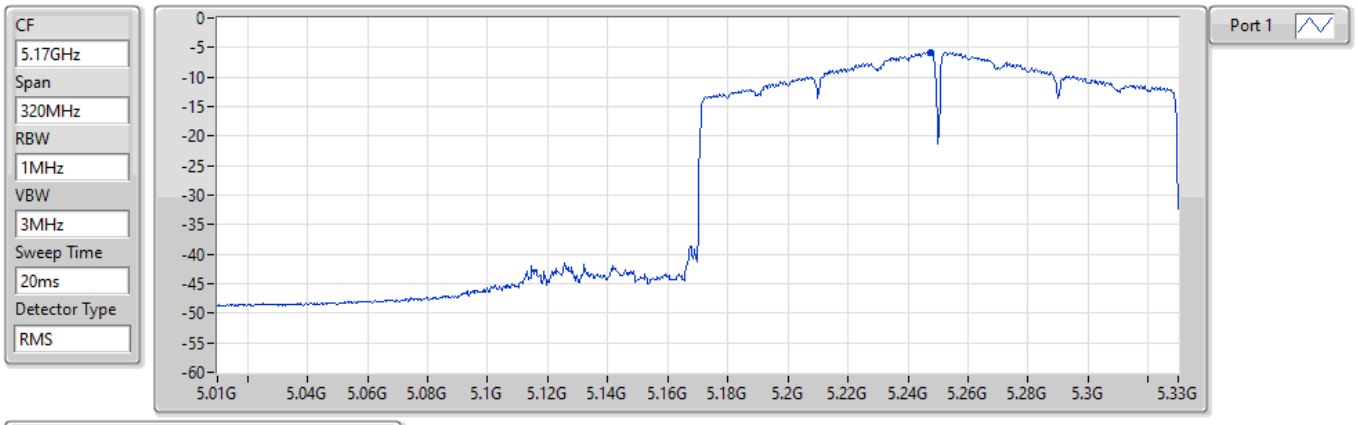


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.84	-5.84	-5.84


802.11ax HEW160_Nss1,(MCS0)_1TX PSD

5250MHz Straddle 5.25-5.35GHz

02/06/2022

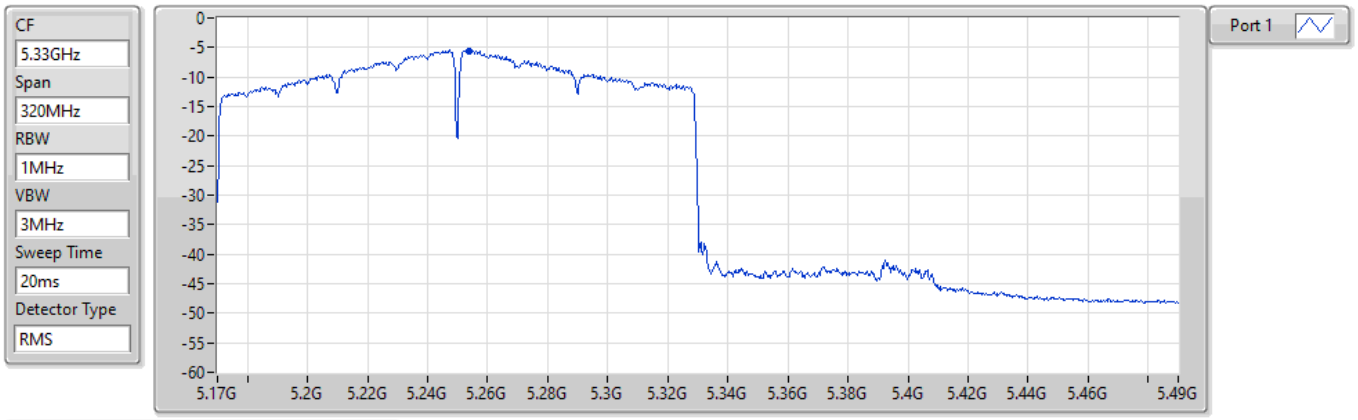

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.51	-5.51	-5.51

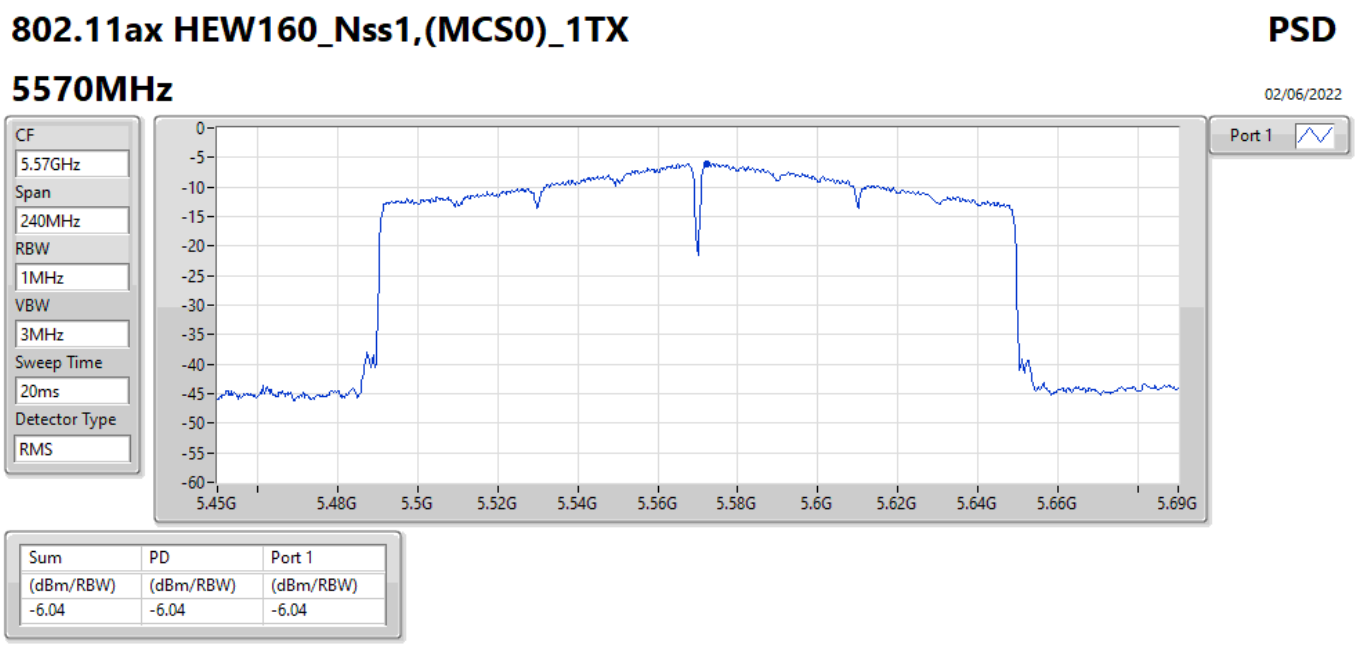
802.11ax HEW160_Nss1,(MCS0)_1TX
PSD
5570MHz
02/06/2022
CF
5.57GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
Port 1
0
-5
-10
-15
-20
-25
-30
-35
-40
-45
-50
-55
-60
5.45G
5.48G
5.5G
5.52G
5.54G
5.56G
5.58G
5.6G
5.62G
5.64G
5.66G
5.69G
Sum
PD
Port 1
(dBm/RBW)
(dBm/RBW)
(dBm/RBW)
-6.04
-6.04
-6.04

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_1TX	10.95
802.11ax HEW20_Nss1,(MCS0)_1TX	10.90
802.11ax HEW40_Nss1,(MCS0)_1TX	6.66
802.11ax HEW80_Nss1,(MCS0)_1TX	-1.17
802.11ax HEW160_Nss1,(MCS0)_1TX	-8.50
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_1TX	10.83
802.11ax HEW20_Nss1,(MCS0)_1TX	10.35
802.11ax HEW40_Nss1,(MCS0)_1TX	6.00
802.11ax HEW80_Nss1,(MCS0)_1TX	-2.76
802.11ax HEW160_Nss1,(MCS0)_1TX	-8.35
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_1TX	10.93
802.11ax HEW20_Nss1,(MCS0)_1TX	10.76
802.11ax HEW40_Nss1,(MCS0)_1TX	7.07
802.11ax HEW80_Nss1,(MCS0)_1TX	2.75
802.11ax HEW160_Nss1,(MCS0)_1TX	-7.00
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_1TX	9.96
802.11ax HEW20_Nss1,(MCS0)_1TX	9.65
802.11ax HEW40_Nss1,(MCS0)_1TX	5.96
802.11ax HEW80_Nss1,(MCS0)_1TX	-0.06

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_1TX	-	-	-	-	-
5180MHz	Pass	5.00	9.65	9.65	11.00
5200MHz	Pass	5.00	10.95	10.95	11.00
5240MHz	Pass	5.00	10.60	10.60	11.00
5260MHz	Pass	5.00	10.57	10.57	11.00
5300MHz	Pass	5.00	10.83	10.83	11.00
5320MHz	Pass	5.00	7.82	7.82	11.00
5500MHz	Pass	5.00	8.87	8.87	11.00
5580MHz	Pass	5.00	10.77	10.77	11.00
5700MHz	Pass	5.00	5.37	5.37	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	10.93	10.93	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	6.83	6.83	30.00
5745MHz	Pass	5.00	9.96	9.96	30.00
5785MHz	Pass	5.00	9.93	9.93	30.00
5825MHz	Pass	5.00	9.88	9.88	30.00
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	5.00	7.73	7.73	11.00
5200MHz	Pass	5.00	10.90	10.90	11.00
5240MHz	Pass	5.00	10.28	10.28	11.00
5260MHz	Pass	5.00	10.31	10.31	11.00
5300MHz	Pass	5.00	10.35	10.35	11.00
5320MHz	Pass	5.00	7.08	7.08	11.00
5500MHz	Pass	5.00	7.82	7.82	11.00
5580MHz	Pass	5.00	10.45	10.45	11.00
5700MHz	Pass	5.00	4.63	4.63	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	10.76	10.76	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	6.73	6.73	30.00
5745MHz	Pass	5.00	9.65	9.65	30.00
5785MHz	Pass	5.00	9.56	9.56	30.00
5825MHz	Pass	5.00	9.42	9.42	30.00
802.11ax HEW40_Nss1,(MCS0)_1TX	-	-	-	-	-
5190MHz	Pass	5.00	3.28	3.28	11.00
5230MHz	Pass	5.00	6.66	6.66	11.00
5270MHz	Pass	5.00	6.00	6.00	11.00
5310MHz	Pass	5.00	2.66	2.66	11.00
5510MHz	Pass	5.00	3.64	3.64	11.00
5550MHz	Pass	5.00	5.61	5.61	11.00
5670MHz	Pass	5.00	3.11	3.11	11.00
5710MHz Straddle 5.47-5.725GHz	Pass	5.00	7.07	7.07	11.00
5710MHz Straddle 5.725-5.85GHz	Pass	5.00	1.00	1.00	30.00
5755MHz	Pass	5.00	5.09	5.09	30.00
5795MHz	Pass	5.00	5.96	5.96	30.00
802.11ax HEW80_Nss1,(MCS0)_1TX	-	-	-	-	-
5210MHz	Pass	5.00	-1.17	-1.17	11.00
5290MHz	Pass	5.00	-2.76	-2.76	11.00
5530MHz	Pass	5.00	-0.46	-0.46	11.00
5610MHz	Pass	5.00	0.80	0.80	11.00
5690MHz Straddle 5.47-5.725GHz	Pass	5.00	2.75	2.75	11.00
5690MHz Straddle 5.725-5.85GHz	Pass	5.00	-3.37	-3.37	30.00
5775MHz	Pass	5.00	-0.06	-0.06	30.00
802.11ax HEW160_Nss1,(MCS0)_1TX	-	-	-	-	-


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
5250MHz Straddle 5.15-5.25GHz	Pass	5.00	-8.50	-8.50	11.00
5250MHz Straddle 5.25-5.35GHz	Pass	5.00	-8.35	-8.35	11.00
5570MHz	Pass	5.00	-7.00	-7.00	11.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11a_Nss1,(6Mbps)_1TX PSD

5180MHz

19/05/2022

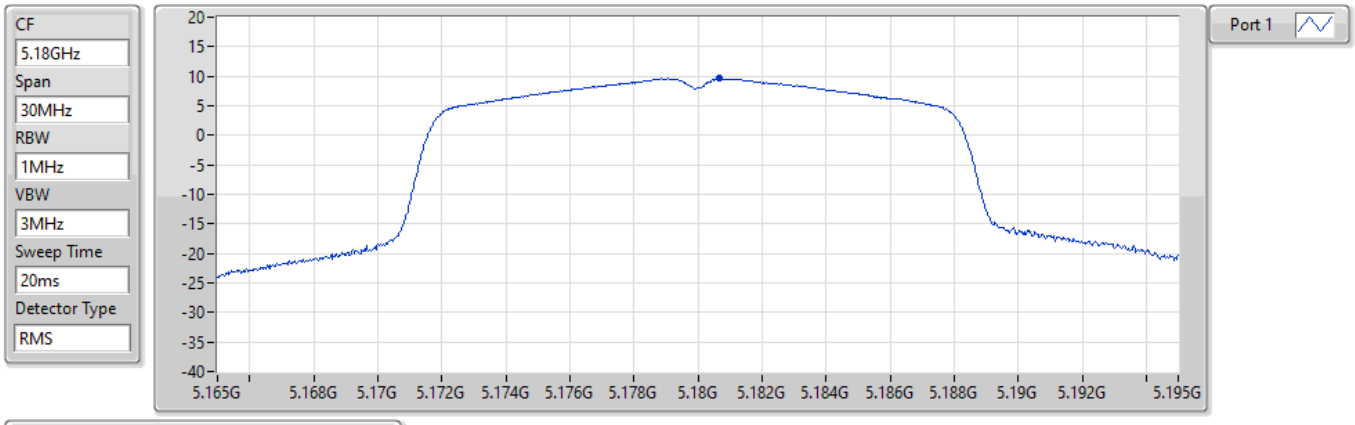


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.65	9.65	9.65

802.11a_Nss1,(6Mbps)_1TX PSD

5200MHz


21/05/2022

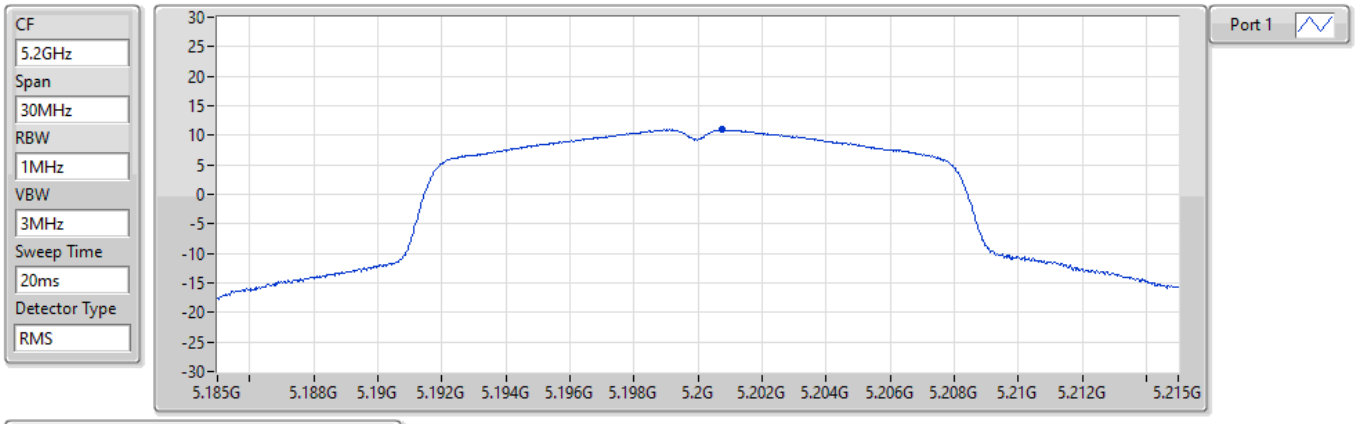

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.95	10.95	10.95

802.11a_Nss1,(6Mbps)_1TX PSD


5240MHz

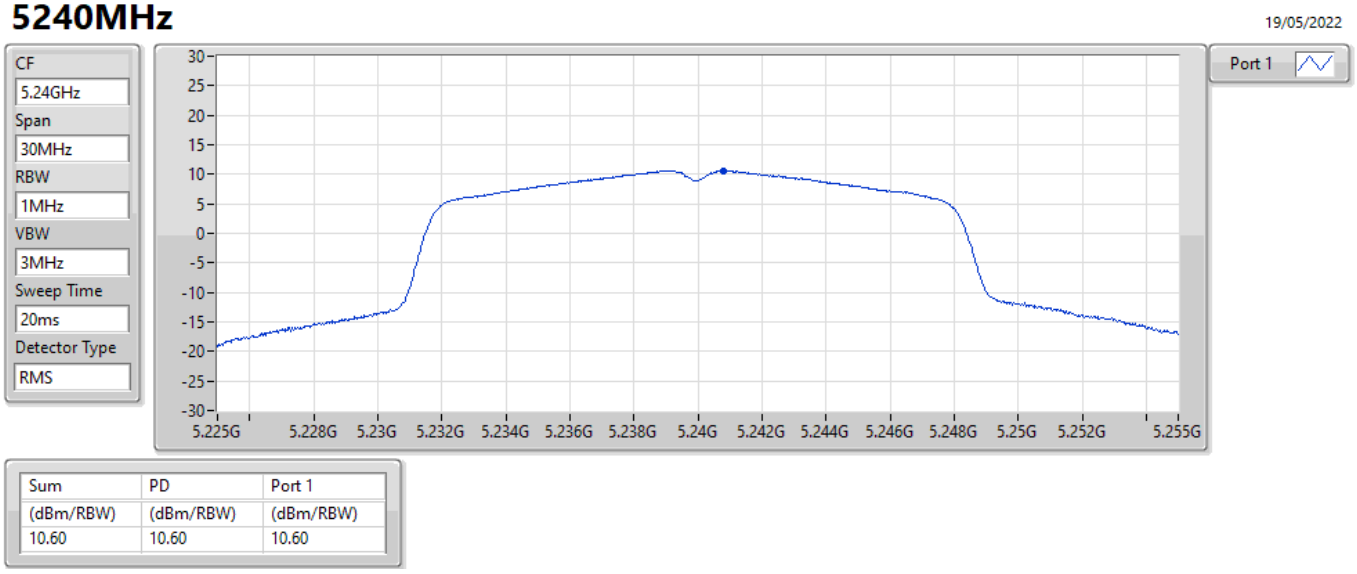

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.60	10.60	10.60

802.11a_Nss1,(6Mbps)_1TX PSD


5260MHz

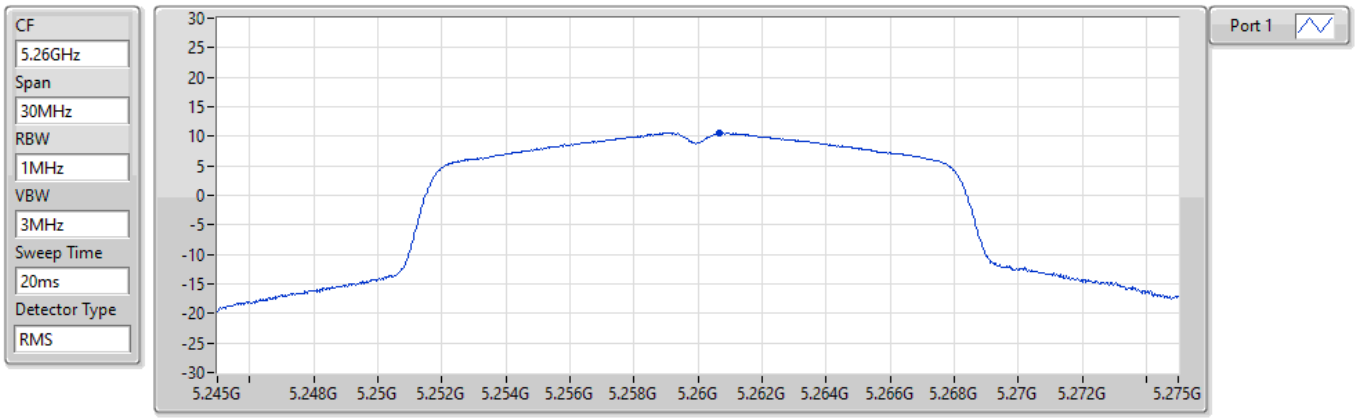

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.57	10.57	10.57

802.11a_Nss1,(6Mbps)_1TX PSD


5300MHz

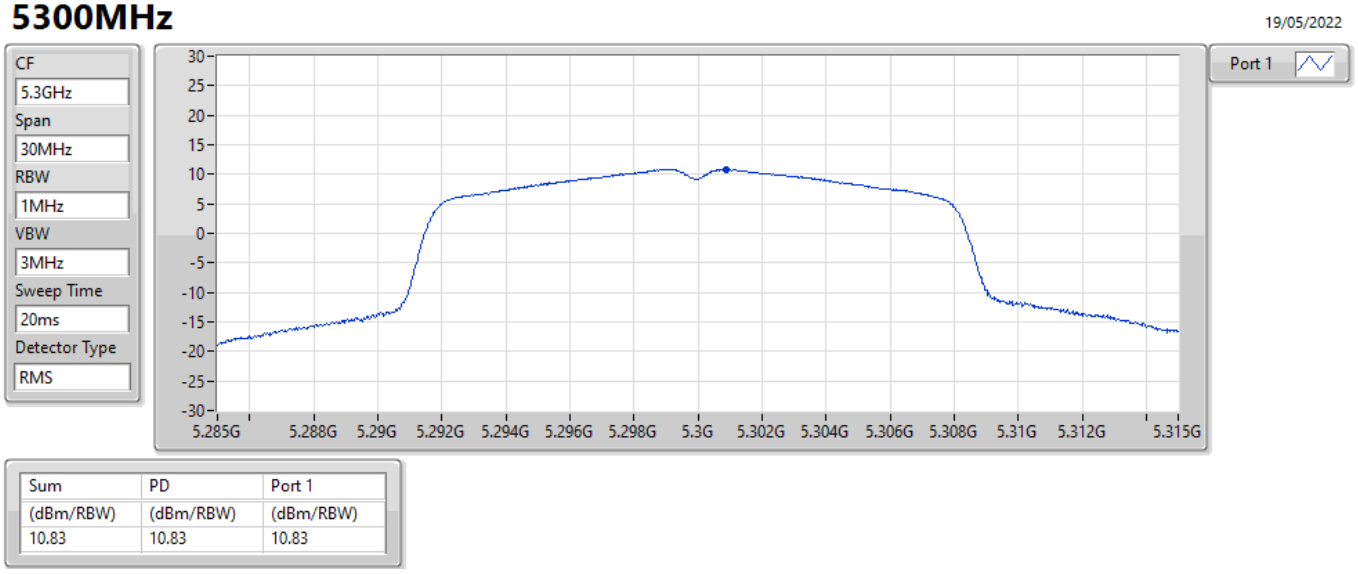

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.83	10.83	10.83

802.11a_Nss1,(6Mbps)_1TX PSD


5320MHz

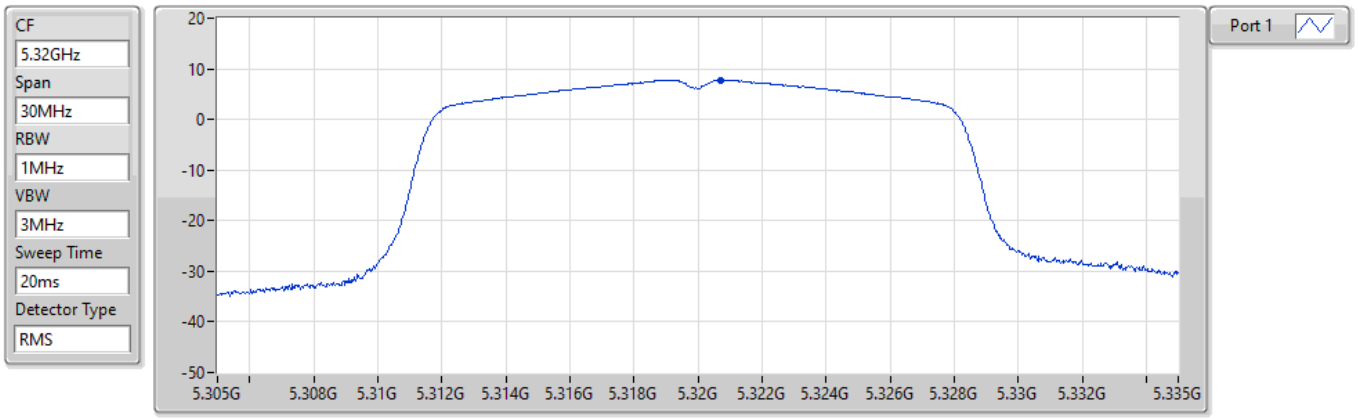

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.82	7.82	7.82

802.11a_Nss1,(6Mbps)_1TX PSD


5500MHz

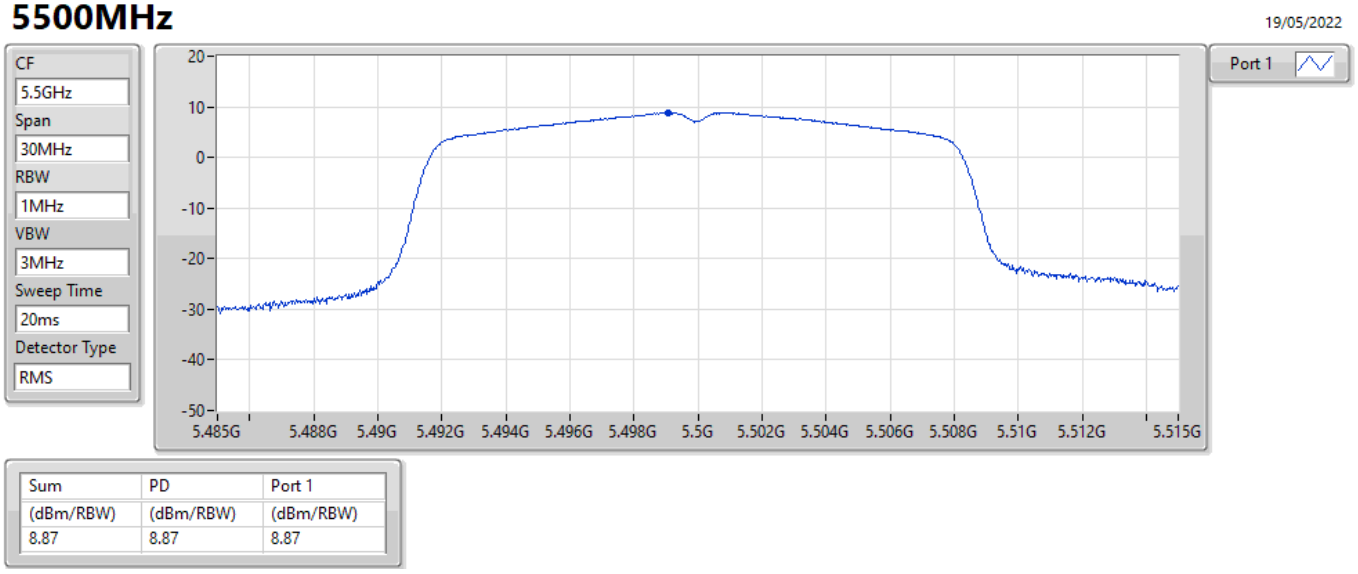

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.87	8.87	8.87

802.11a_Nss1,(6Mbps)_1TX PSD


5580MHz

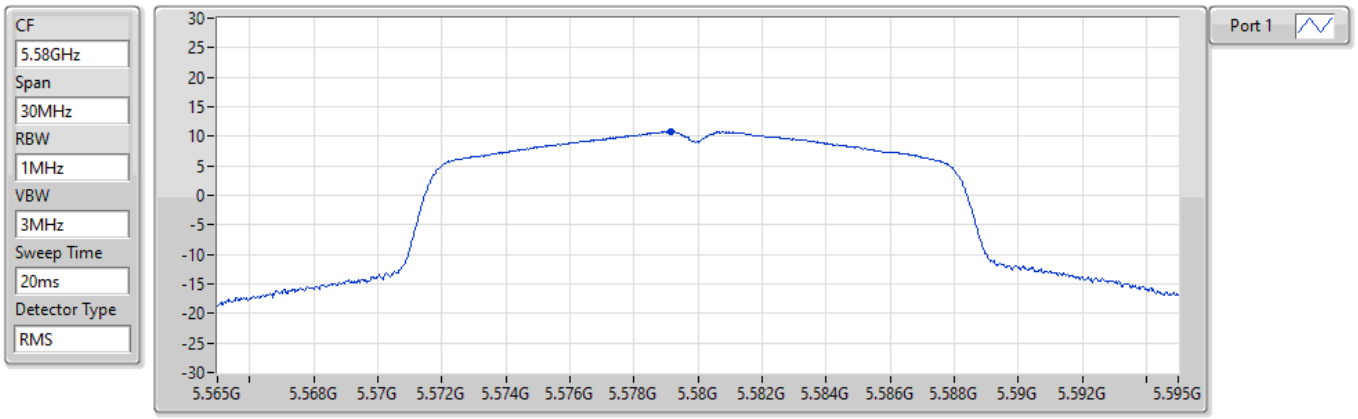

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.77	10.77	10.77

802.11a_Nss1,(6Mbps)_1TX PSD


5700MHz

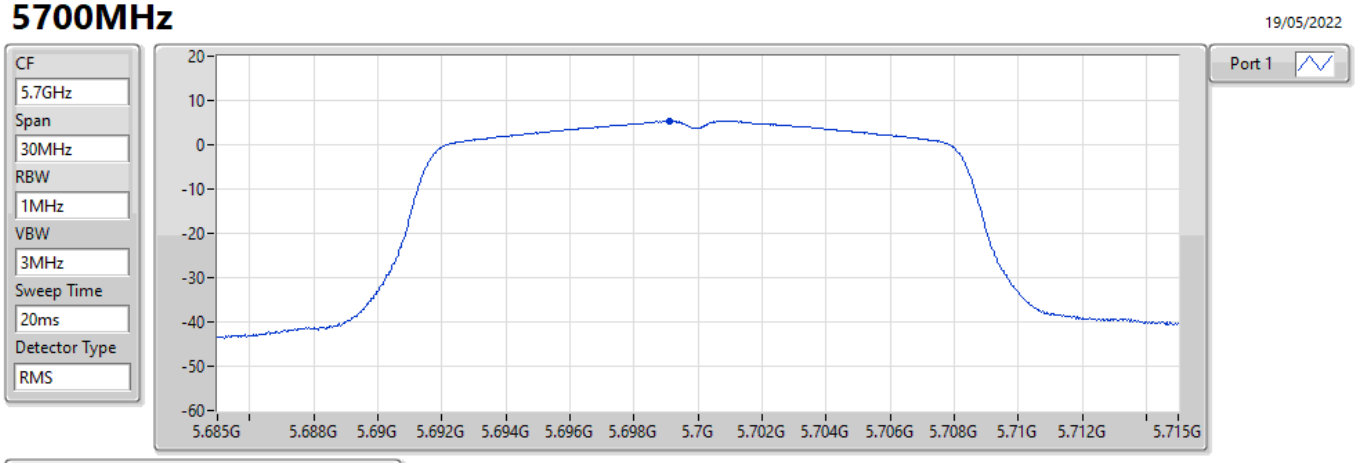

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.37	5.37	5.37

802.11a_Nss1,(6Mbps)_1TX PSD


5720MHz Straddle 5.47-5.725GHz

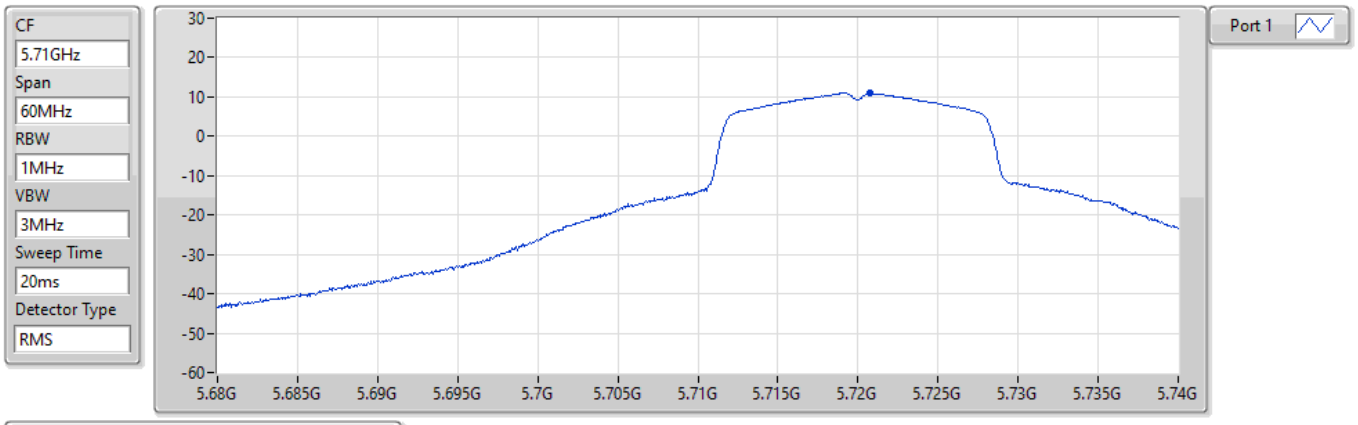

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.93	10.93	10.93

802.11a_Nss1,(6Mbps)_1TX PSD


5720MHz Straddle 5.725-5.85GHz

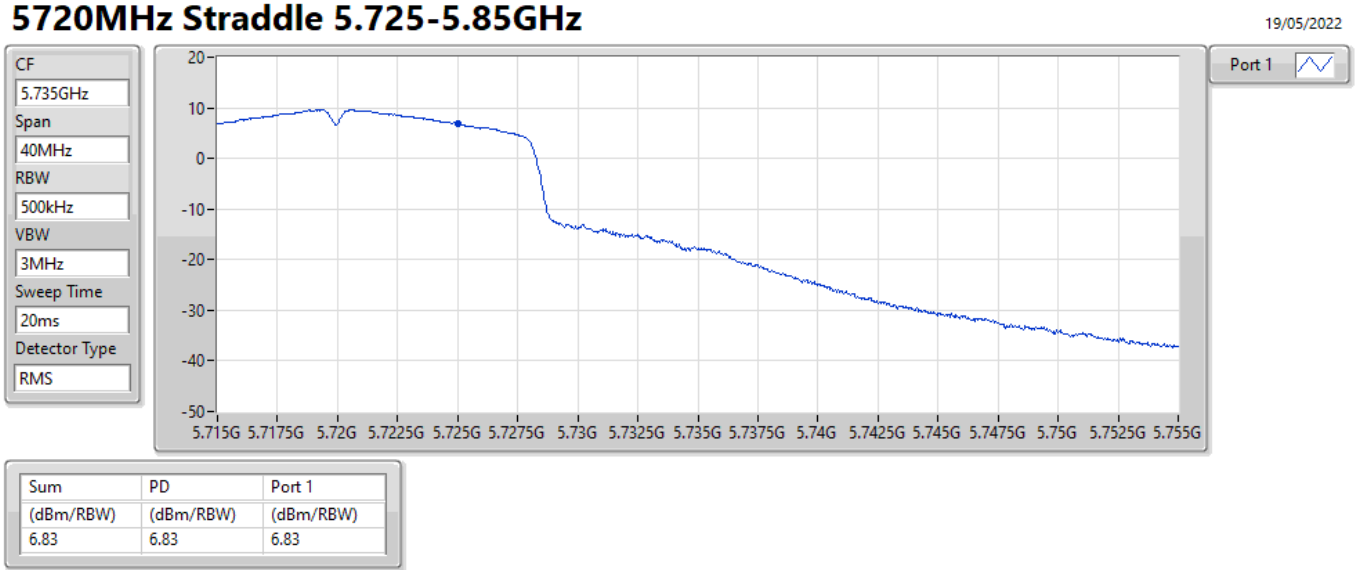

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.83	6.83	6.83

802.11a_Nss1,(6Mbps)_1TX PSD


5745MHz

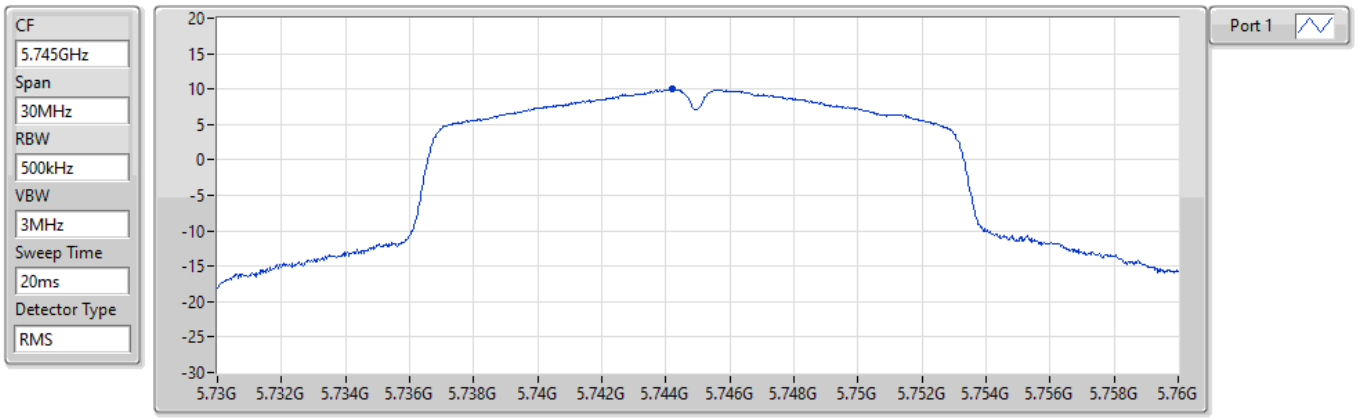

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.96	9.96	9.96

802.11a_Nss1,(6Mbps)_1TX PSD


5785MHz

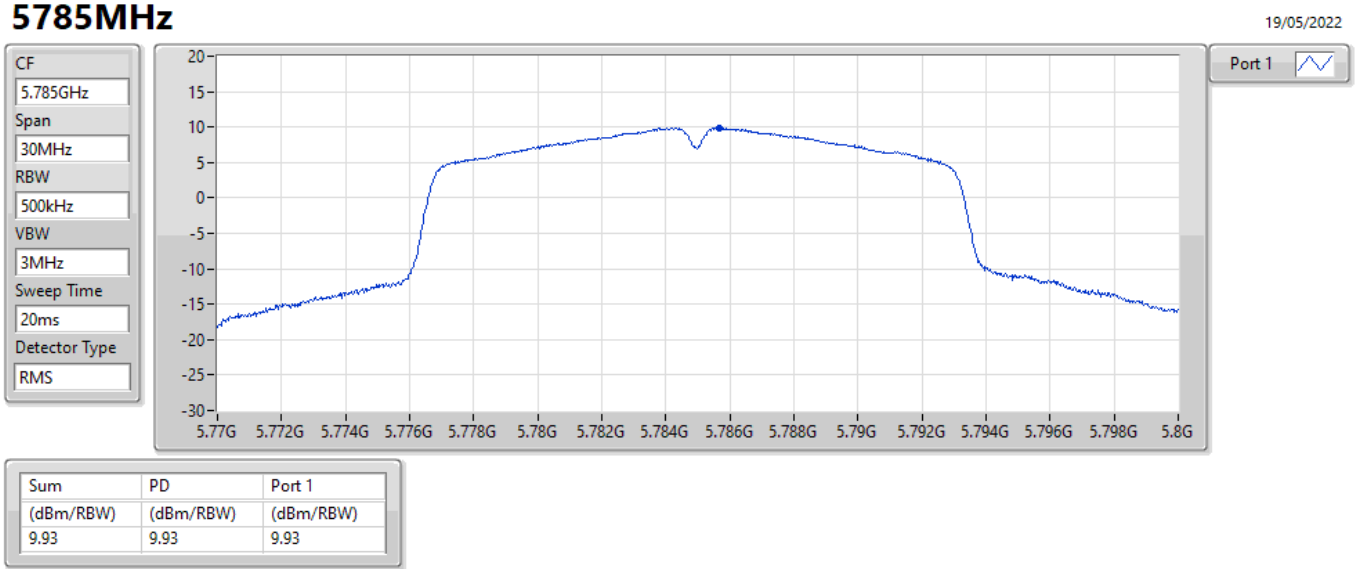

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.93	9.93	9.93

802.11a_Nss1,(6Mbps)_1TX PSD


5825MHz

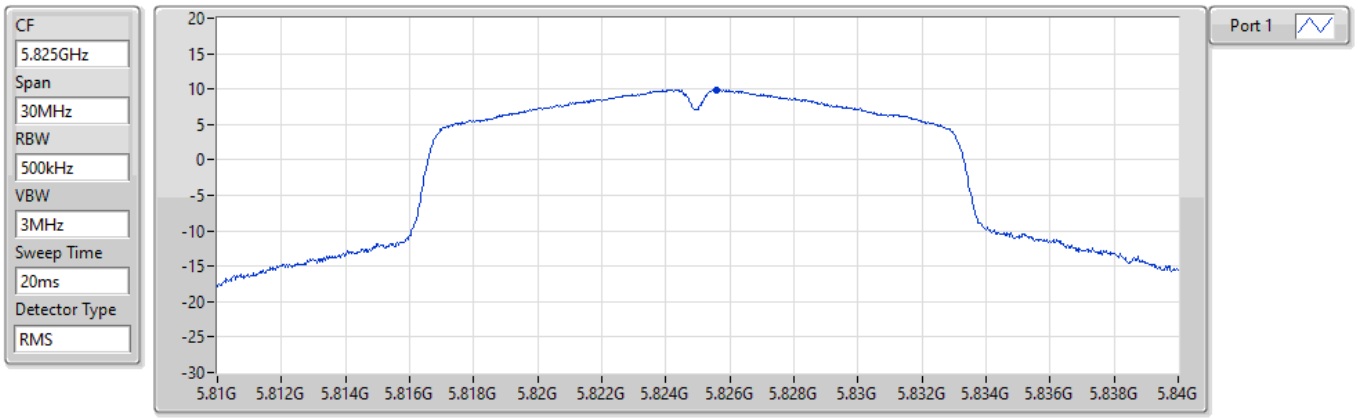

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.88	9.88	9.88

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5180MHz

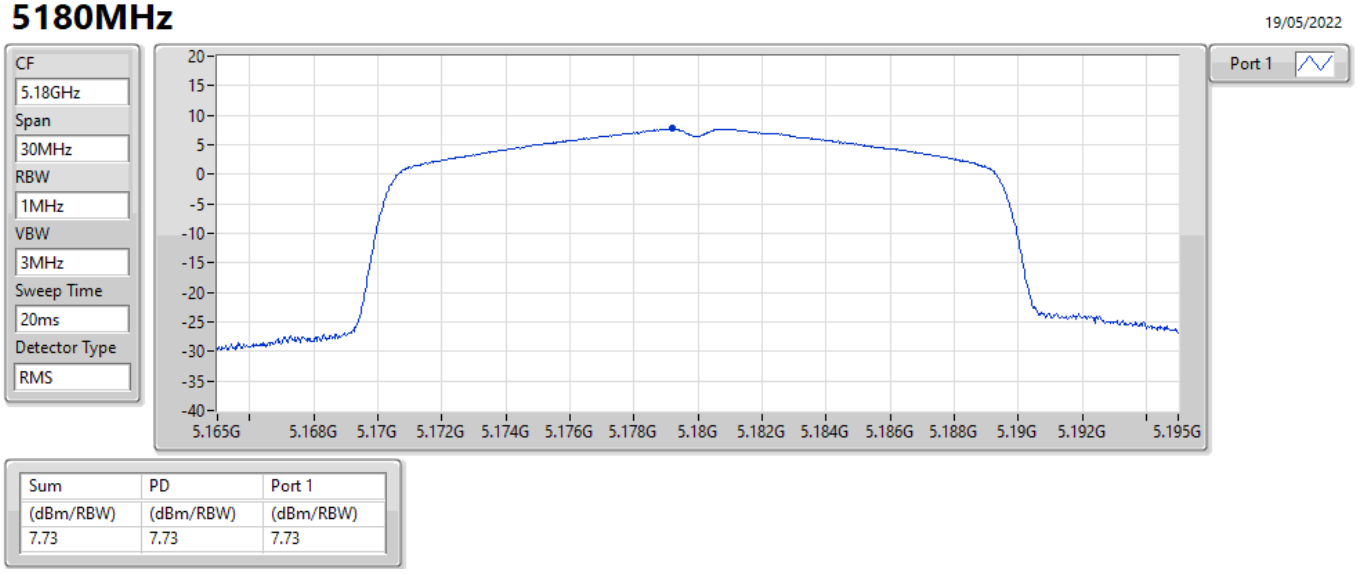

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.73	7.73	7.73

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5200MHz

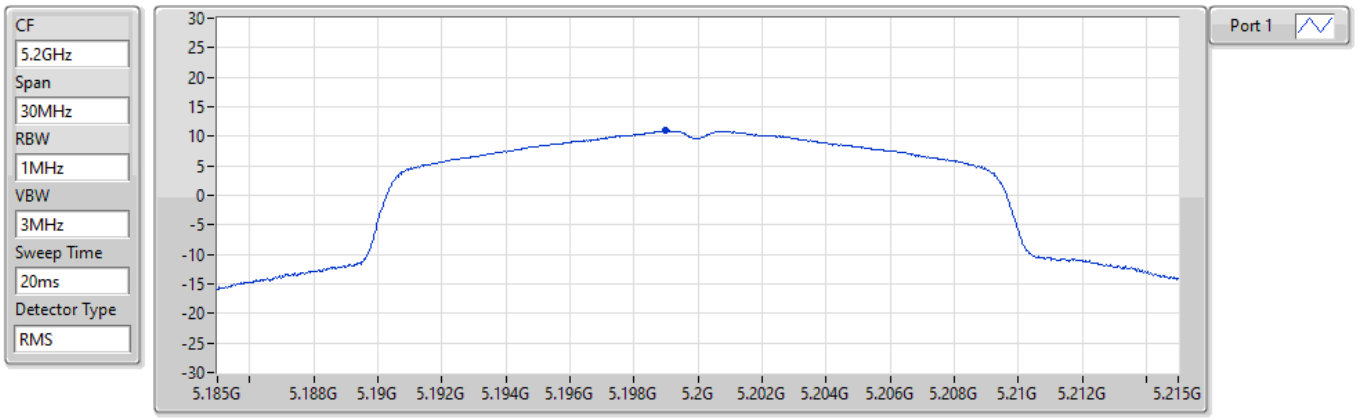

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.90	10.90	10.90

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5240MHz

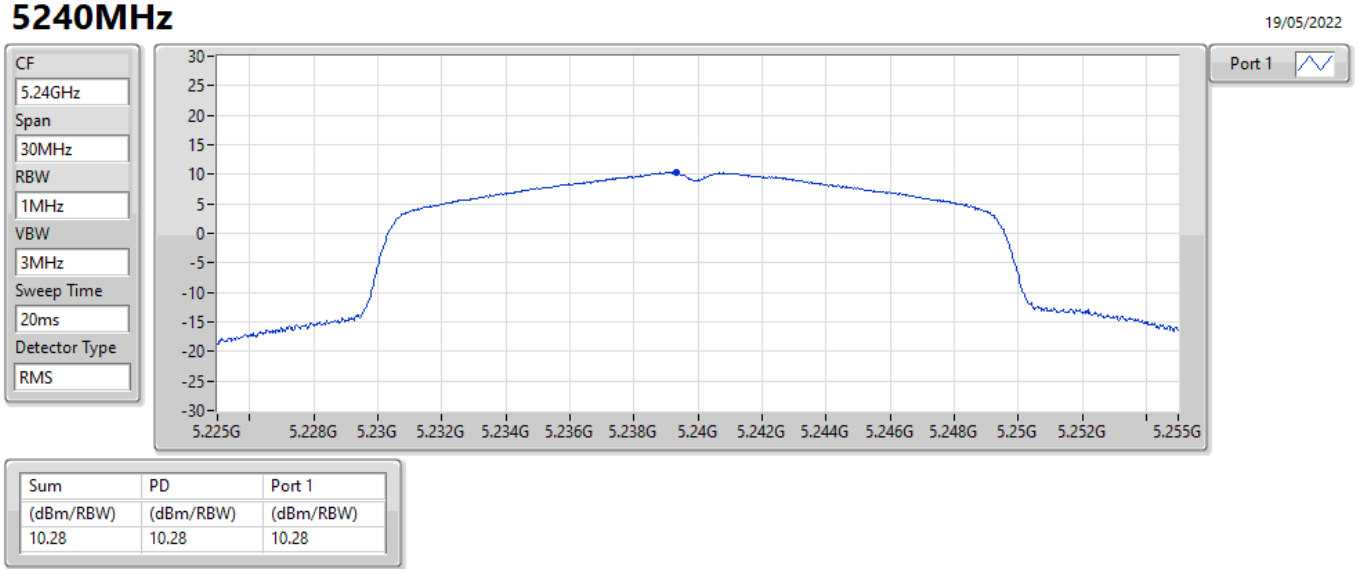

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.28	10.28	10.28

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5260MHz

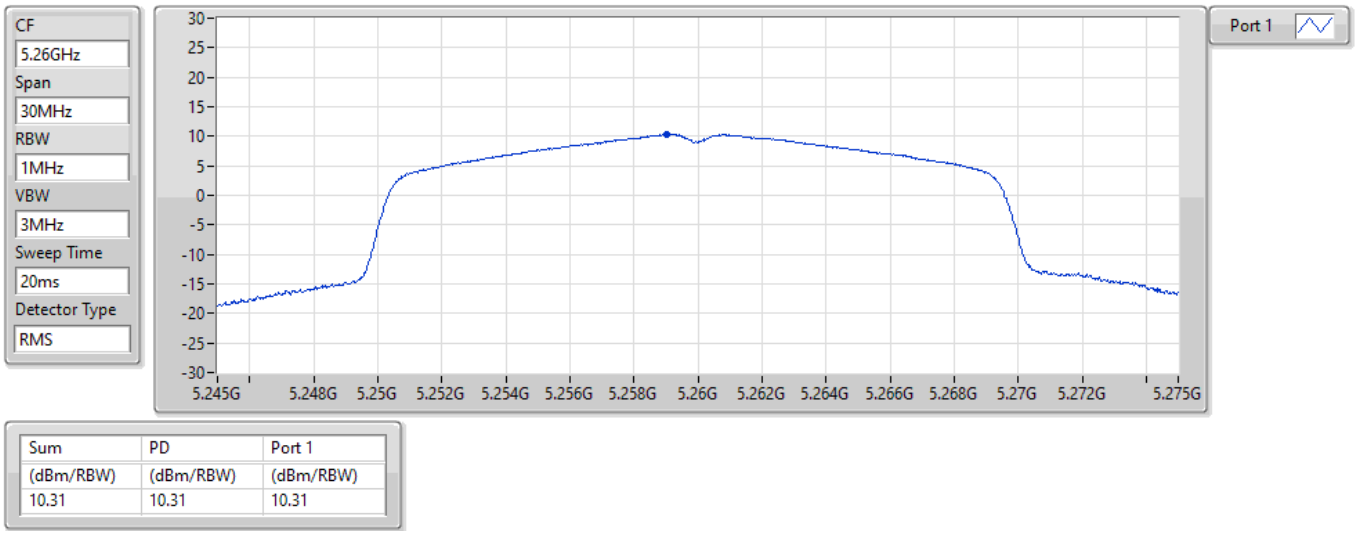

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.31	10.31	10.31

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5300MHz

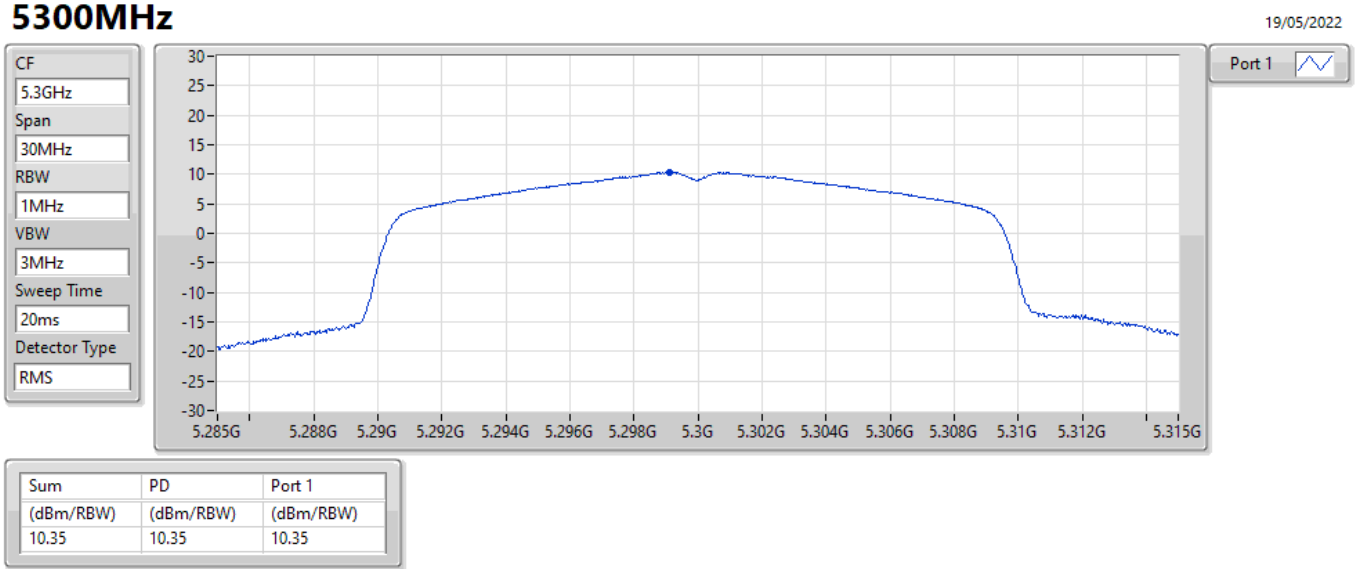

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.35	10.35	10.35

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5320MHz

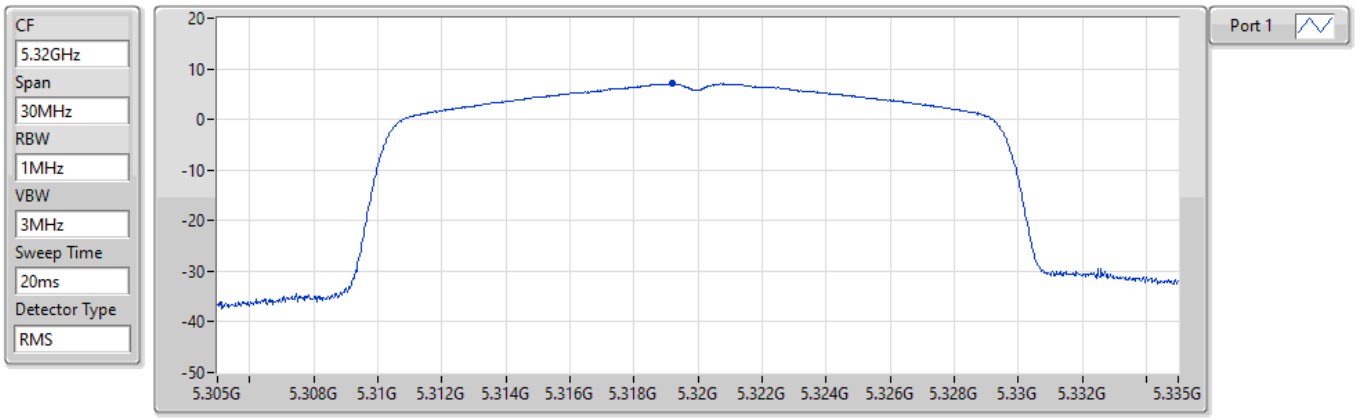

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.08	7.08	7.08

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5500MHz

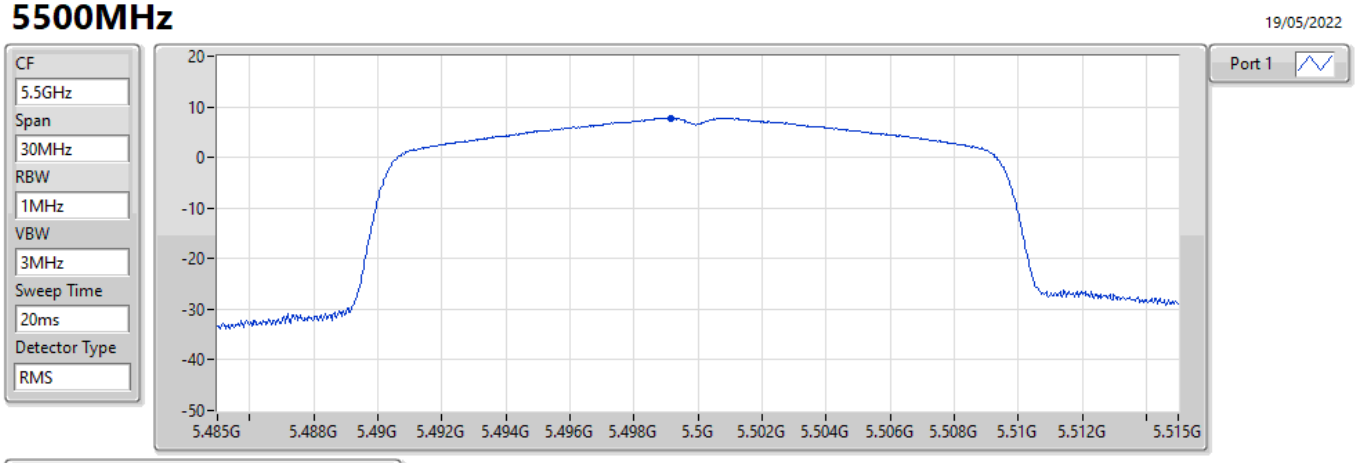

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.82	7.82	7.82

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5580MHz

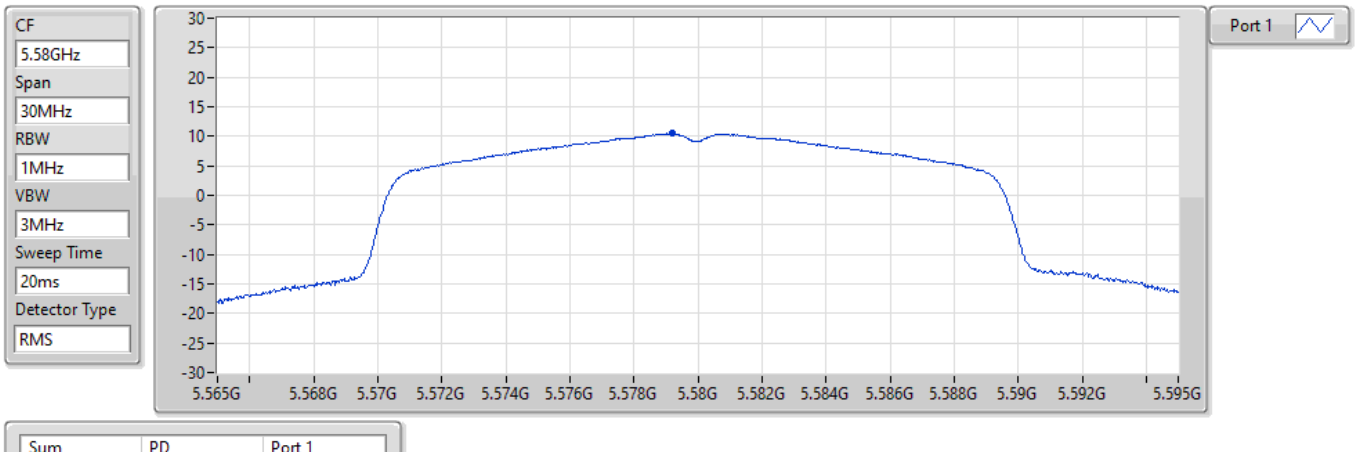

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.45	10.45	10.45

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5700MHz

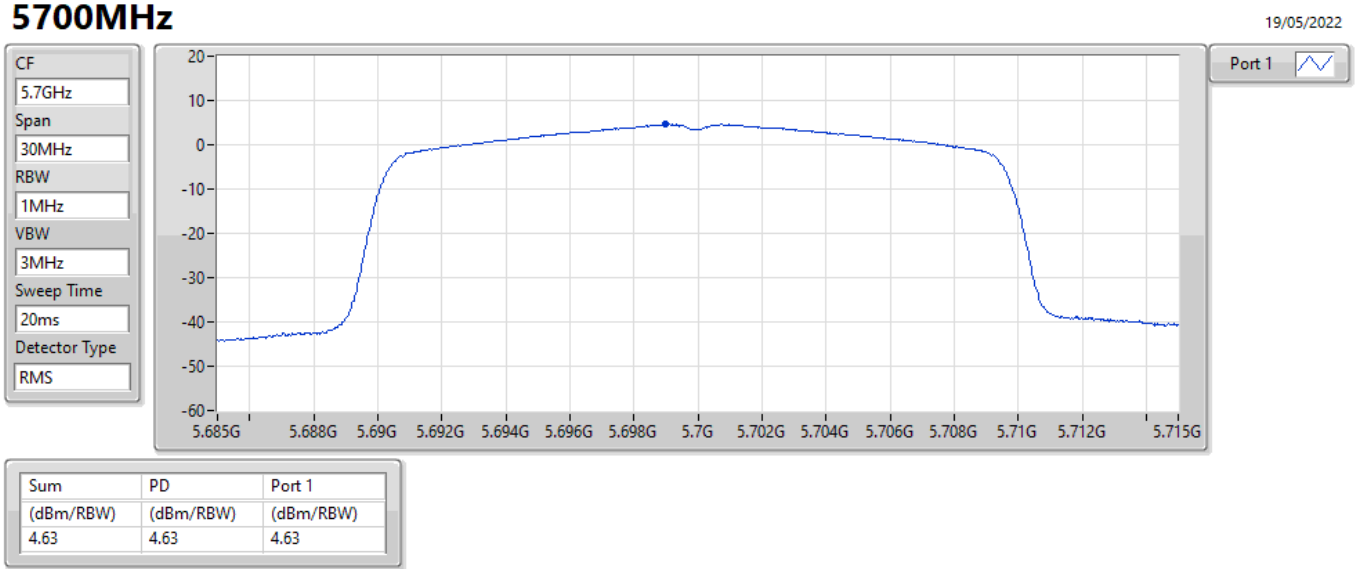

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.63	4.63	4.63

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.47-5.725GHz

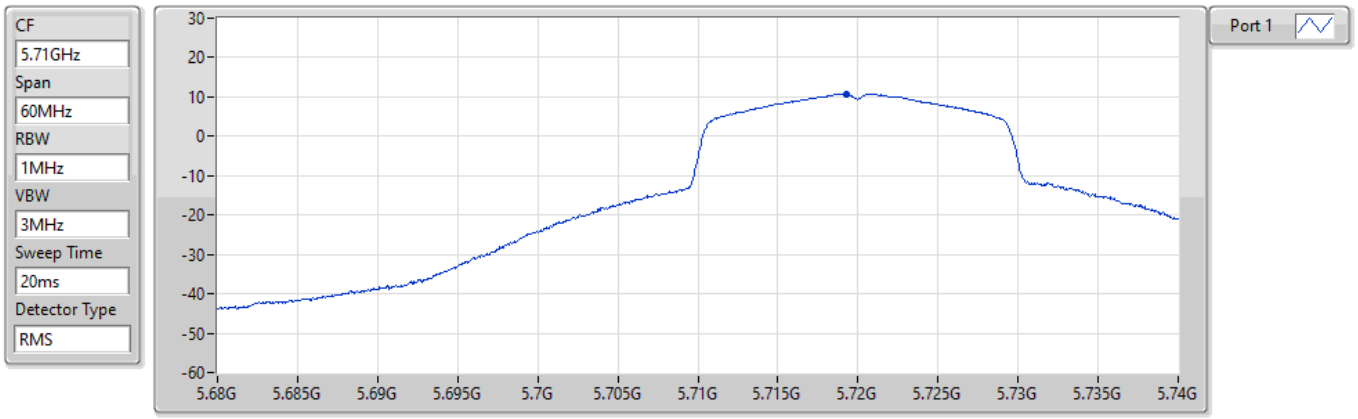

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.76	10.76	10.76

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.725-5.85GHz

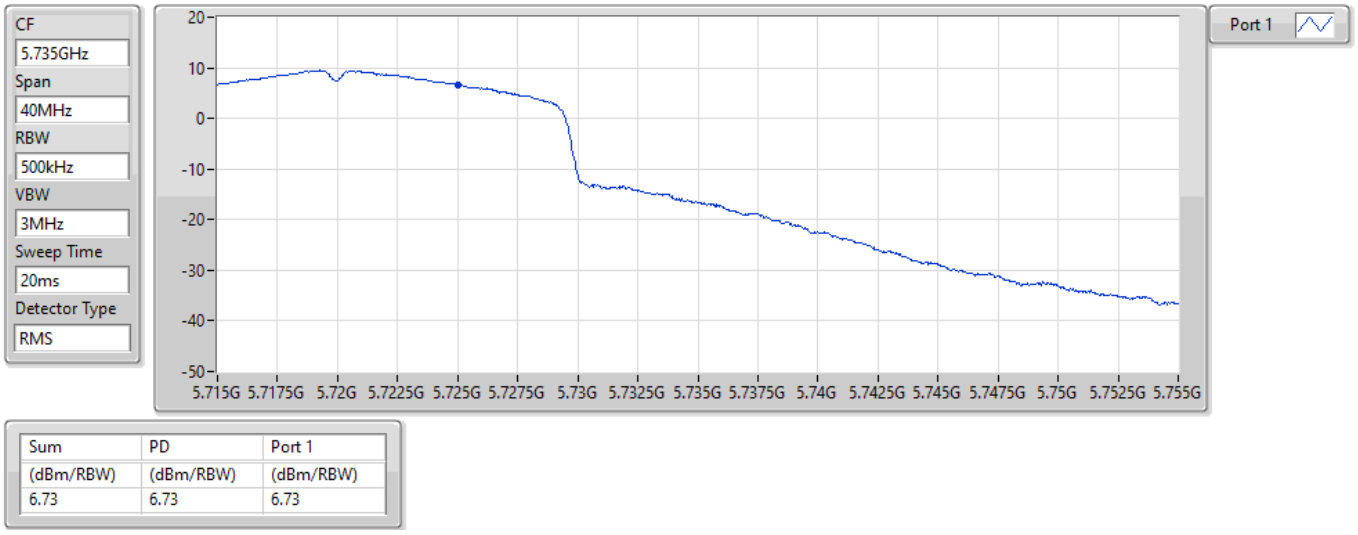

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.73	6.73	6.73

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5745MHz

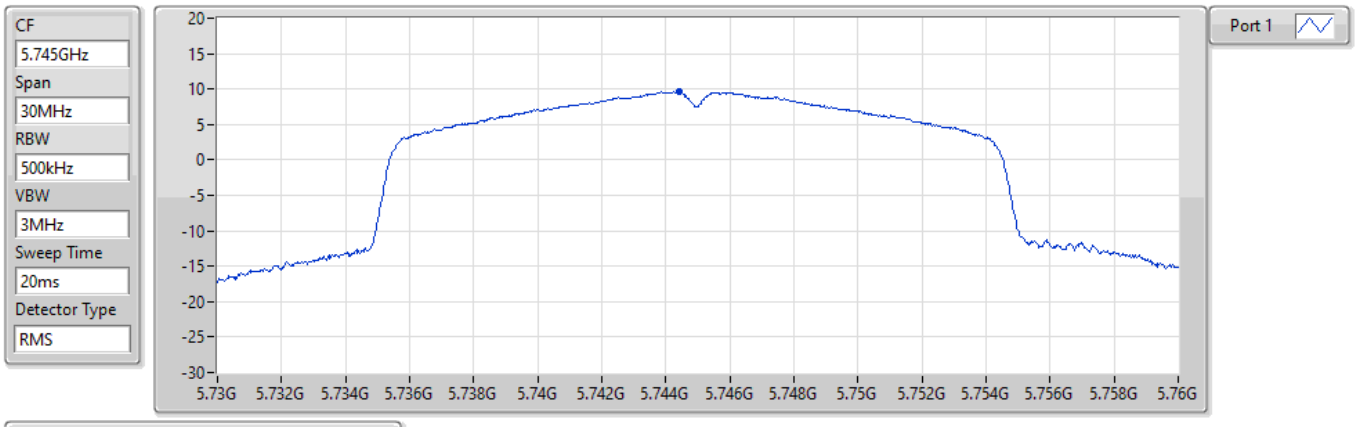

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.65	9.65	9.65

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5785MHz

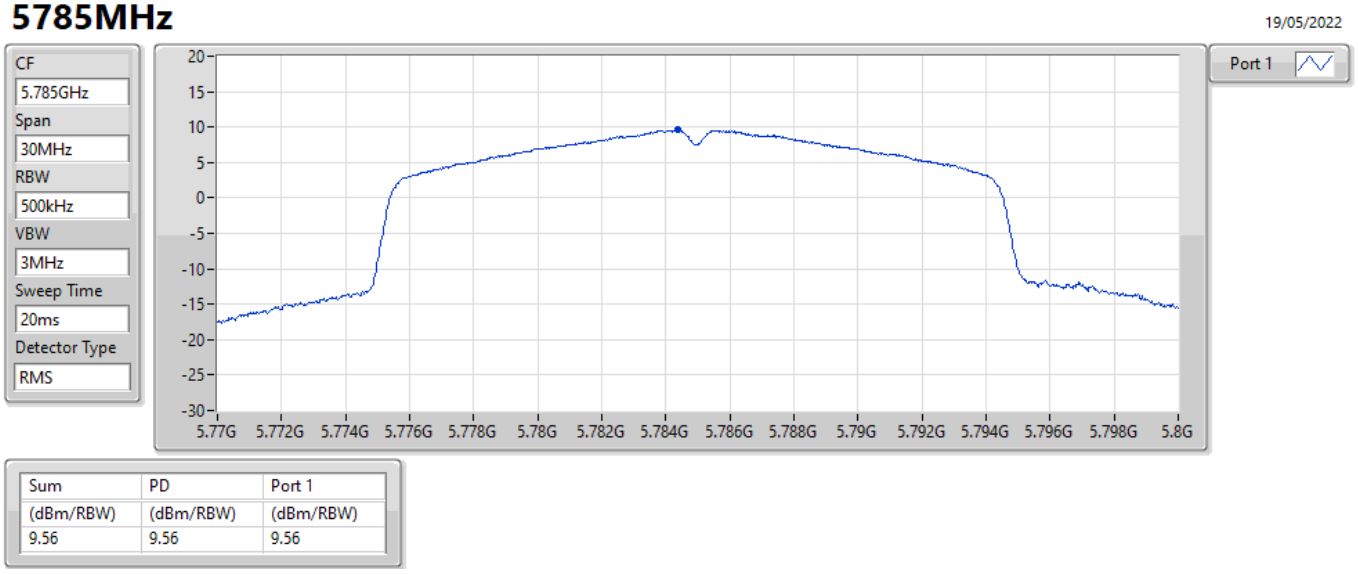

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.56	9.56	9.56

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5825MHz

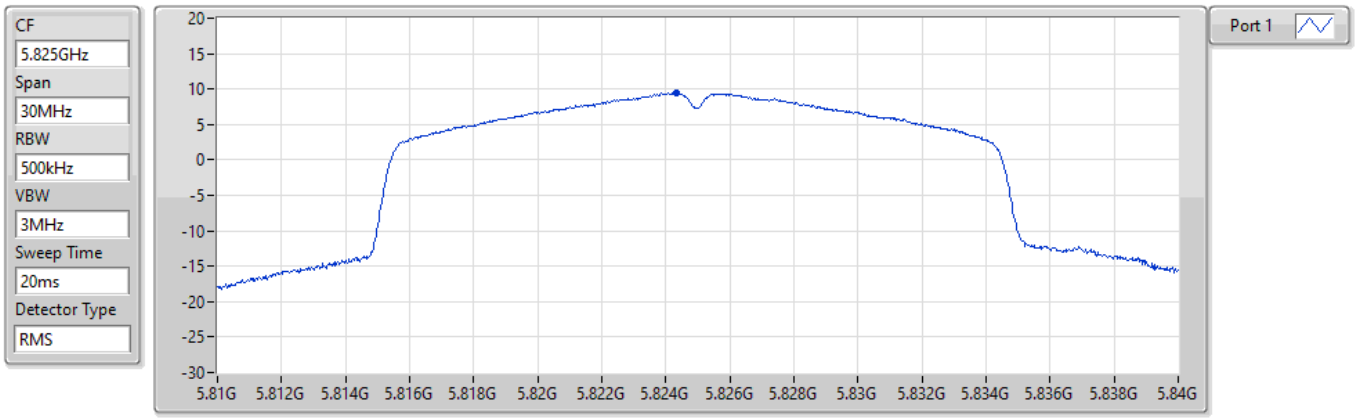

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.42	9.42	9.42

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5190MHz

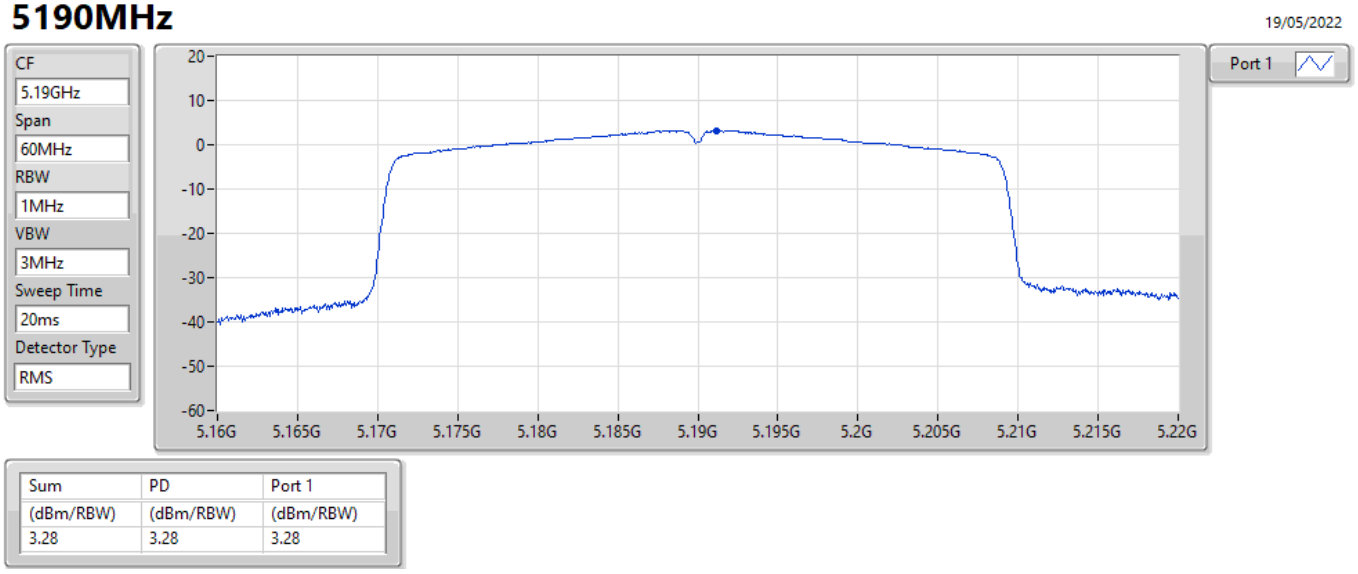

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.28	3.28	3.28

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5230MHz

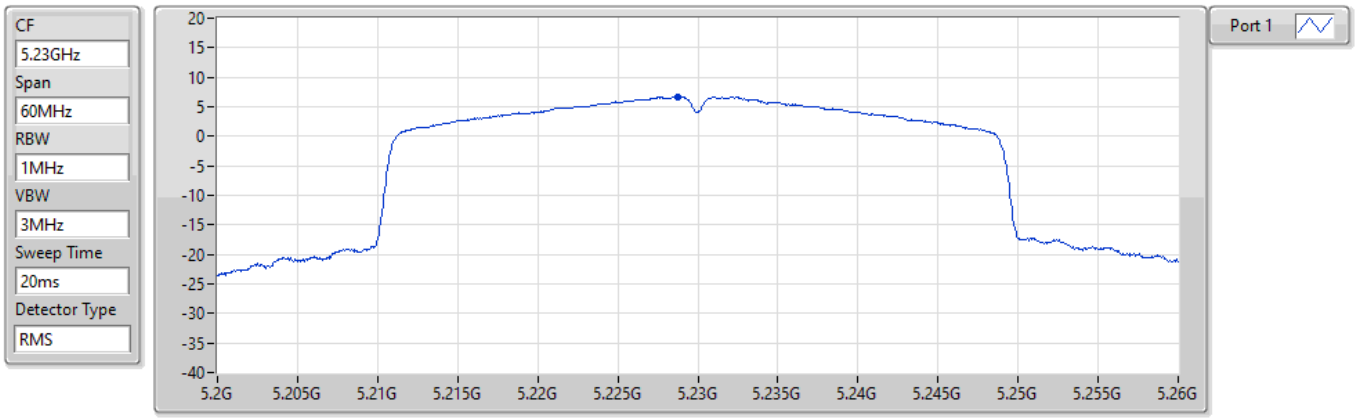

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.66	6.66	6.66

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5270MHz

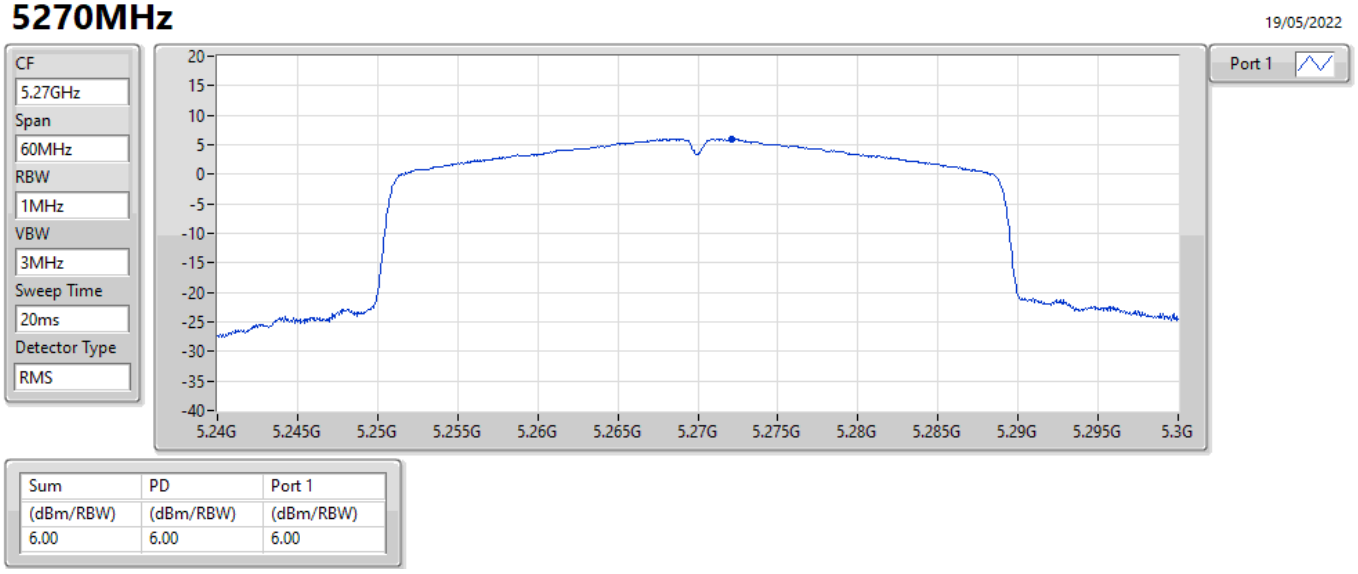

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.00	6.00	6.00

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5310MHz

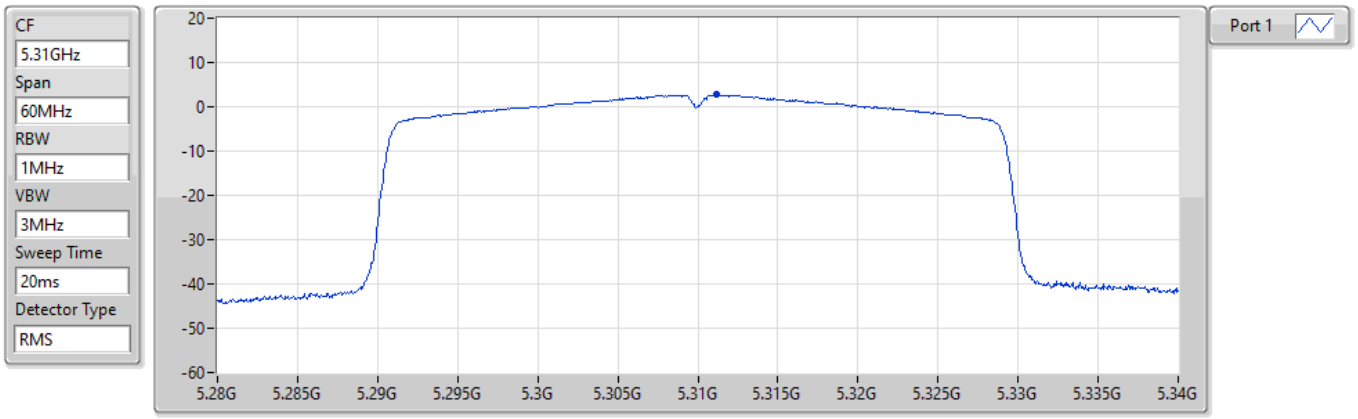

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.66	2.66	2.66

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5510MHz

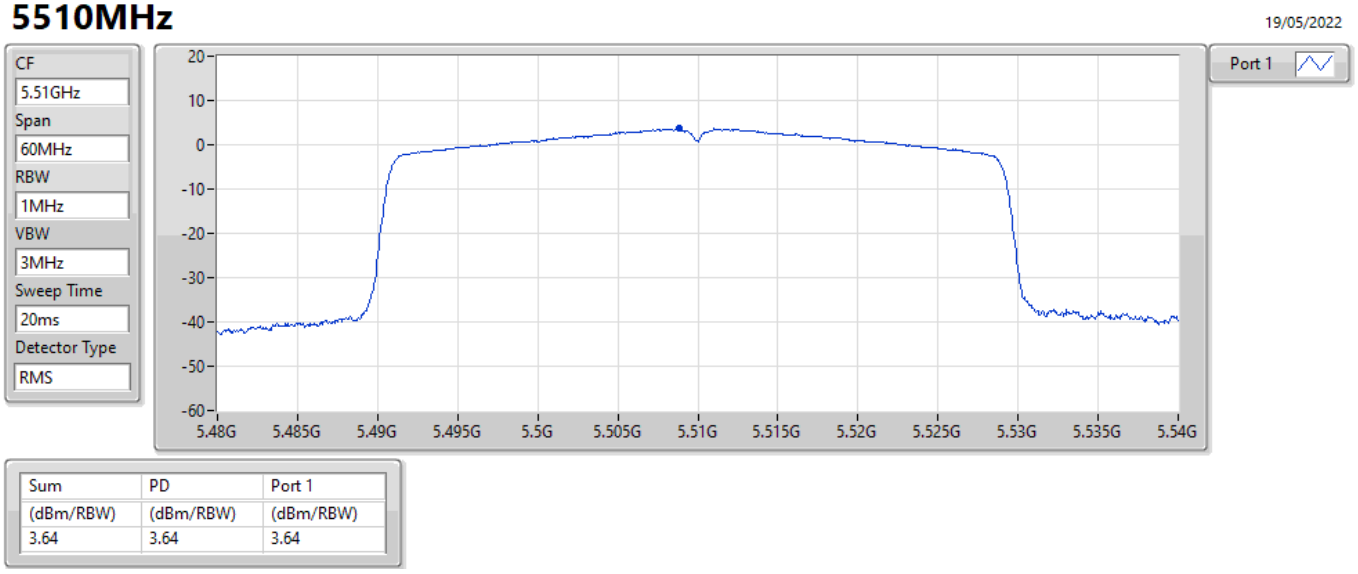

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.64	3.64	3.64

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5550MHz

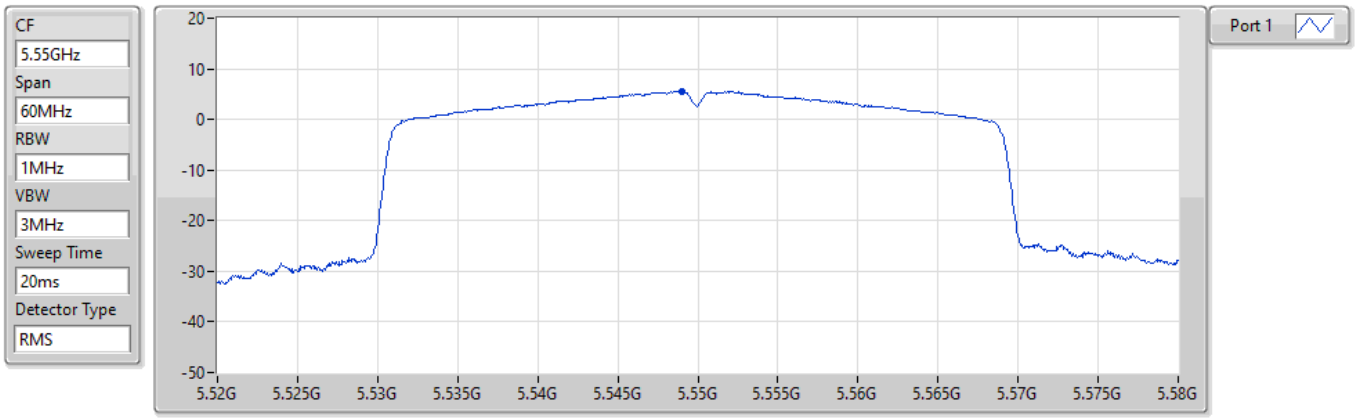

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.61	5.61	5.61

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5670MHz

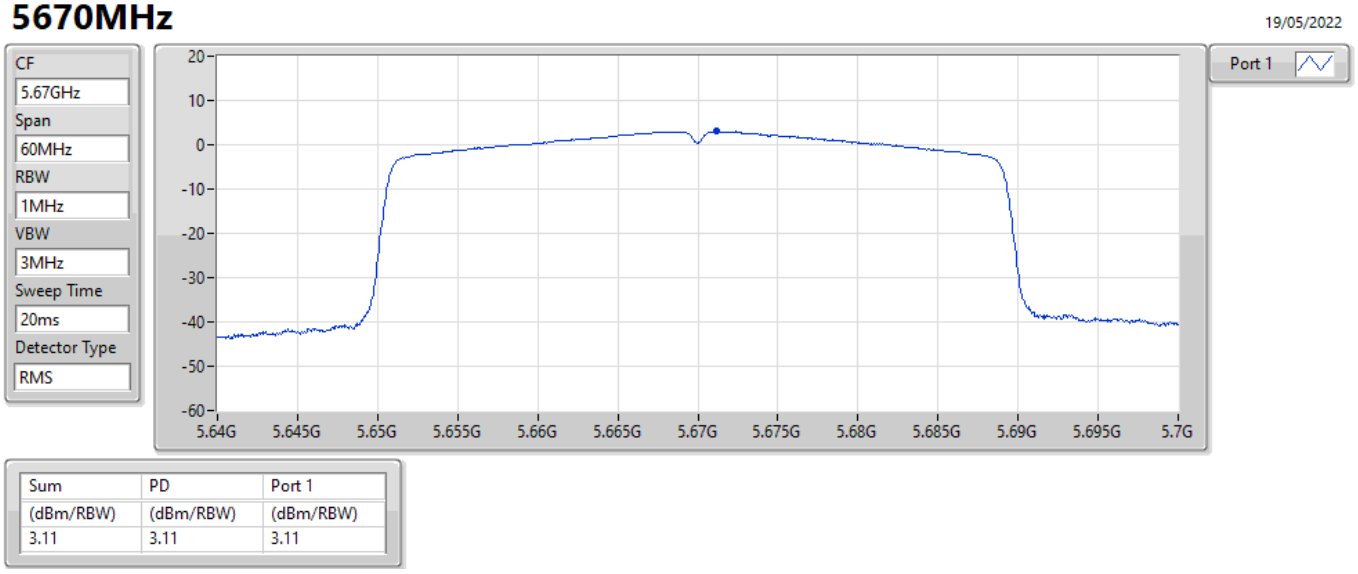

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.11	3.11	3.11

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5710MHz Straddle 5.47-5.725GHz

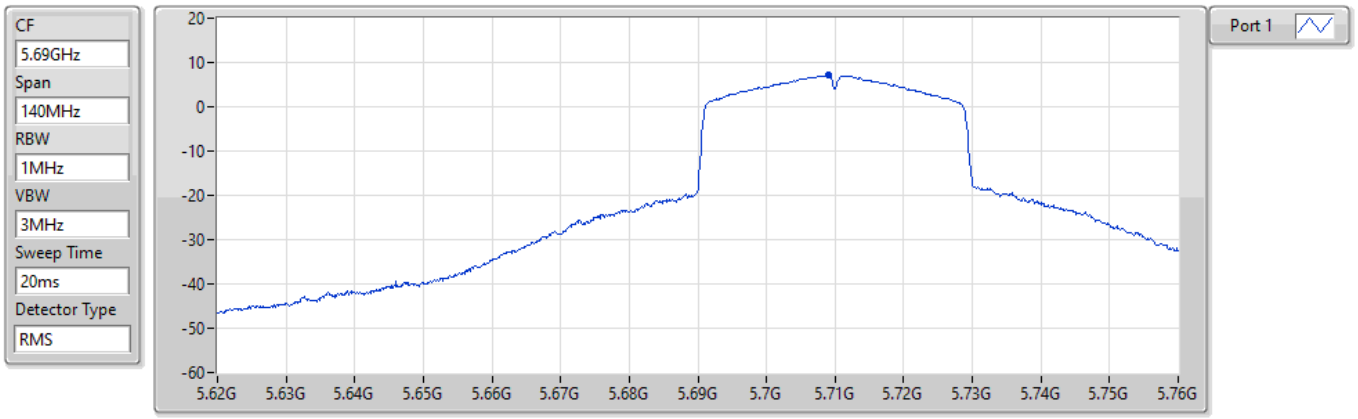

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.07	7.07	7.07

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5710MHz Straddle 5.725-5.85GHz

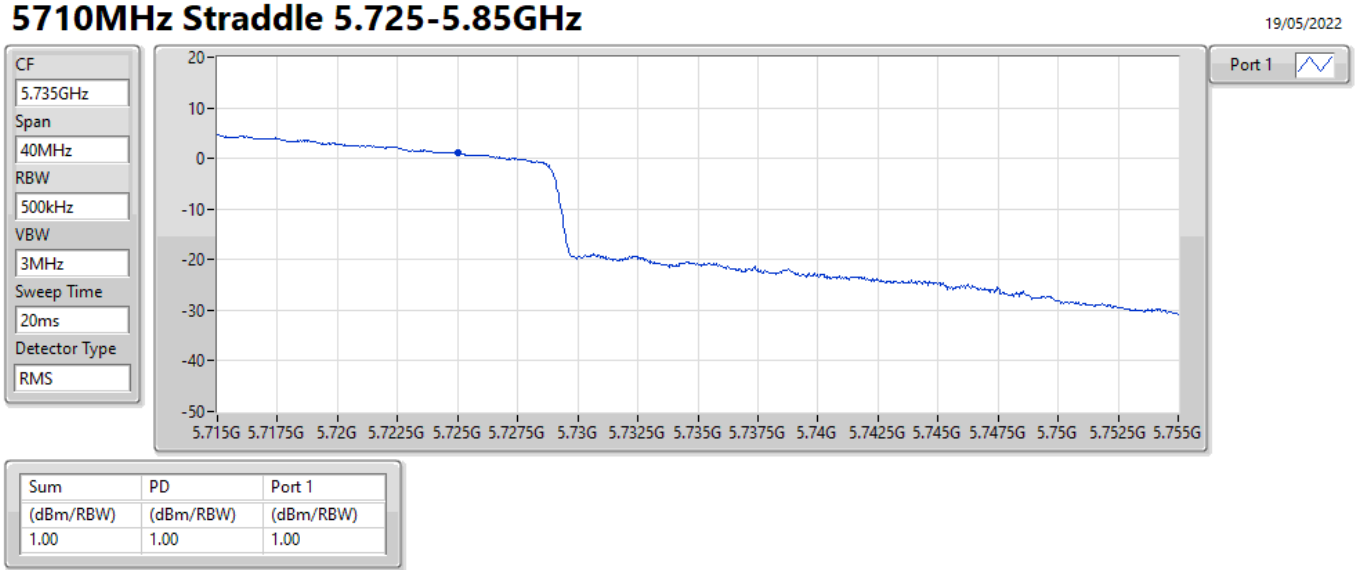

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.00	1.00	1.00

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5755MHz

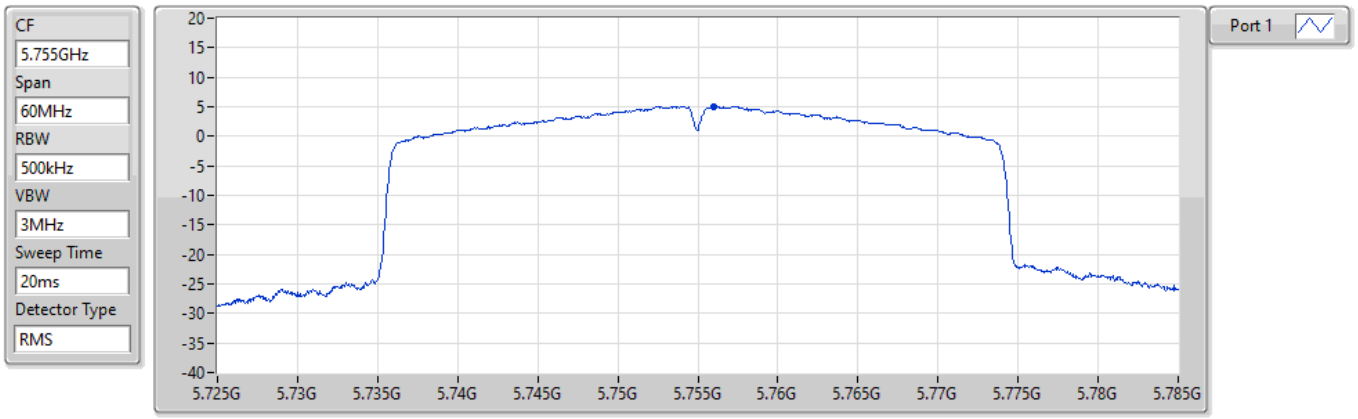

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.09	5.09	5.09

802.11ax HEW40_Nss1,(MCS0)_1TX PSD


5795MHz

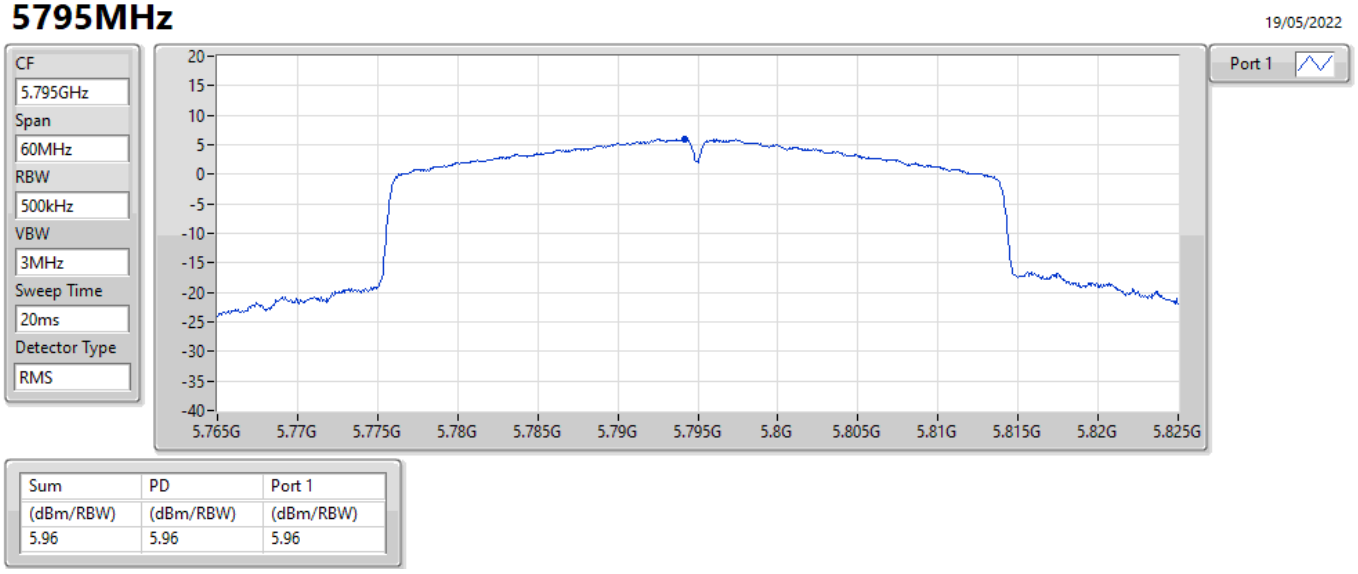

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.96	5.96	5.96

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5210MHz

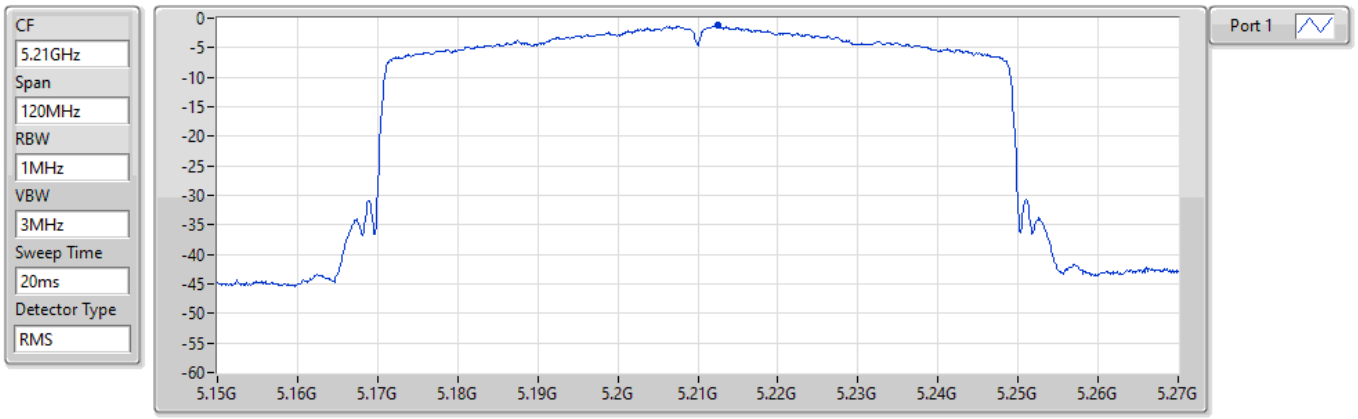

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.17	-1.17	-1.17

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5290MHz

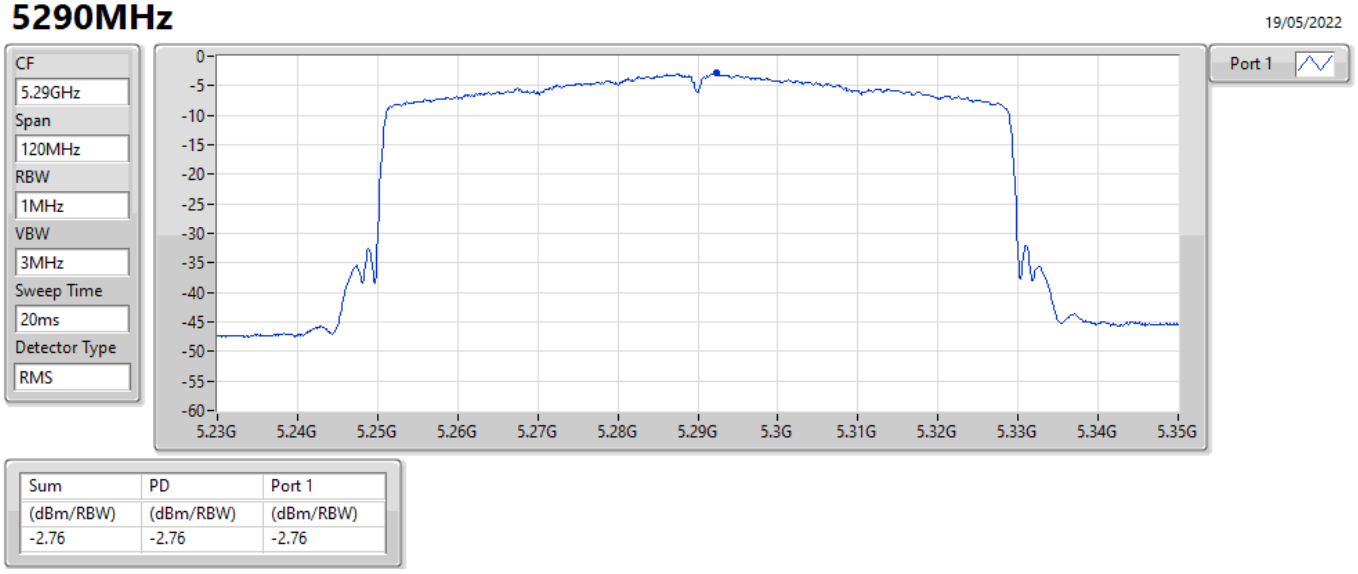

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.76	-2.76	-2.76

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5530MHz

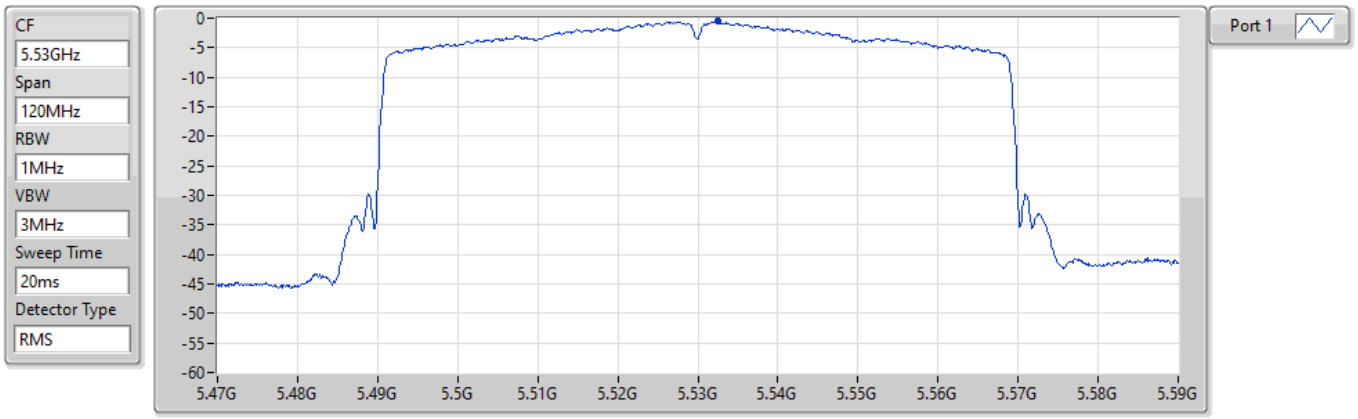

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.46	-0.46	-0.46

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5610MHz

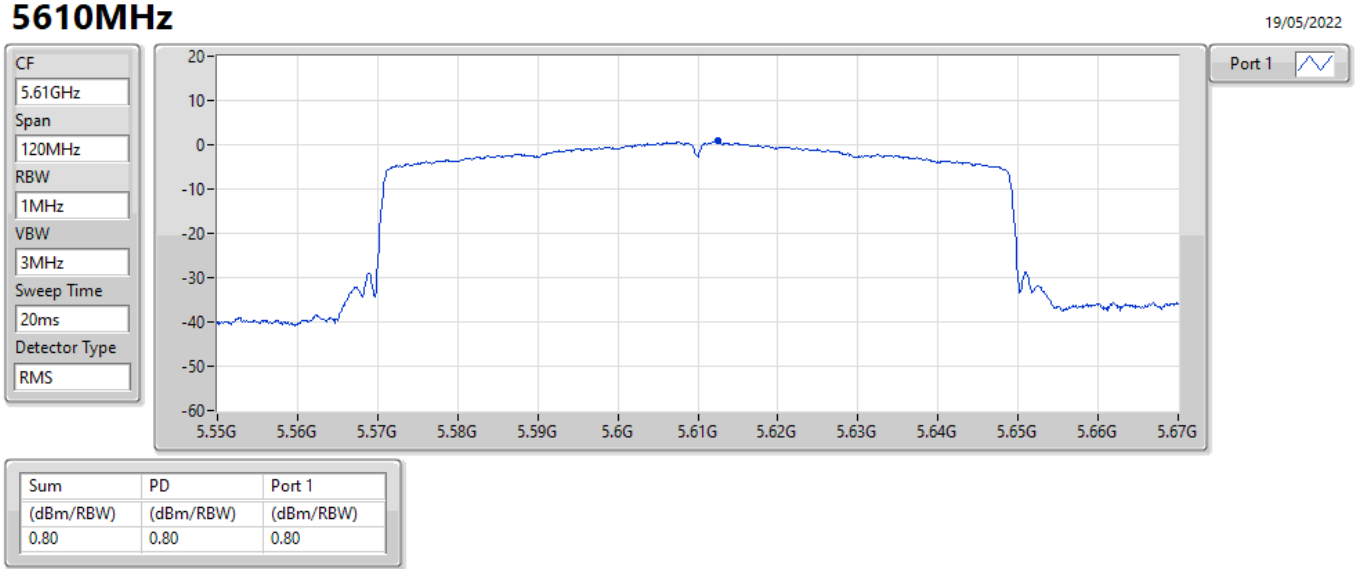

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.80	0.80	0.80

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5690MHz Straddle 5.47-5.725GHz

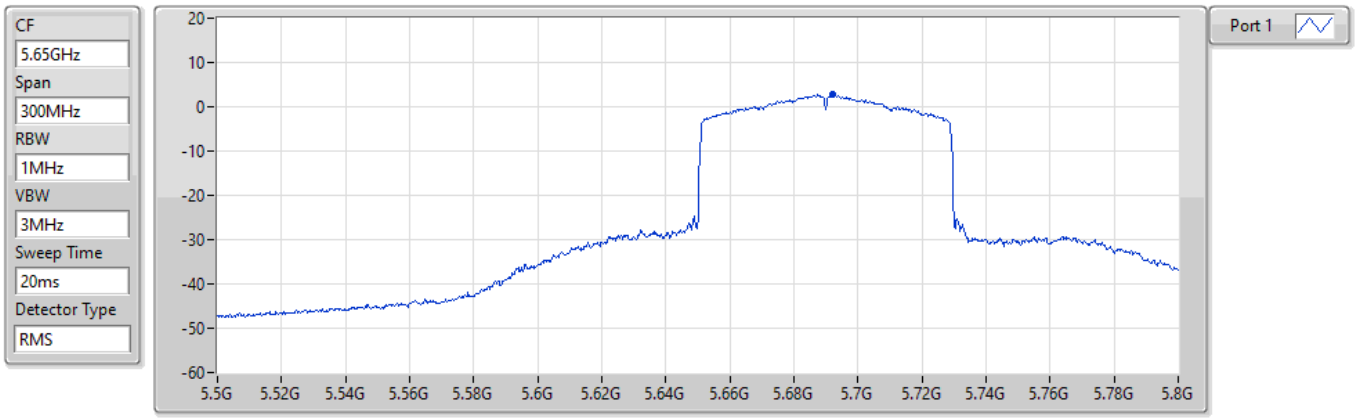

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.75	2.75	2.75

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5690MHz Straddle 5.725-5.85GHz

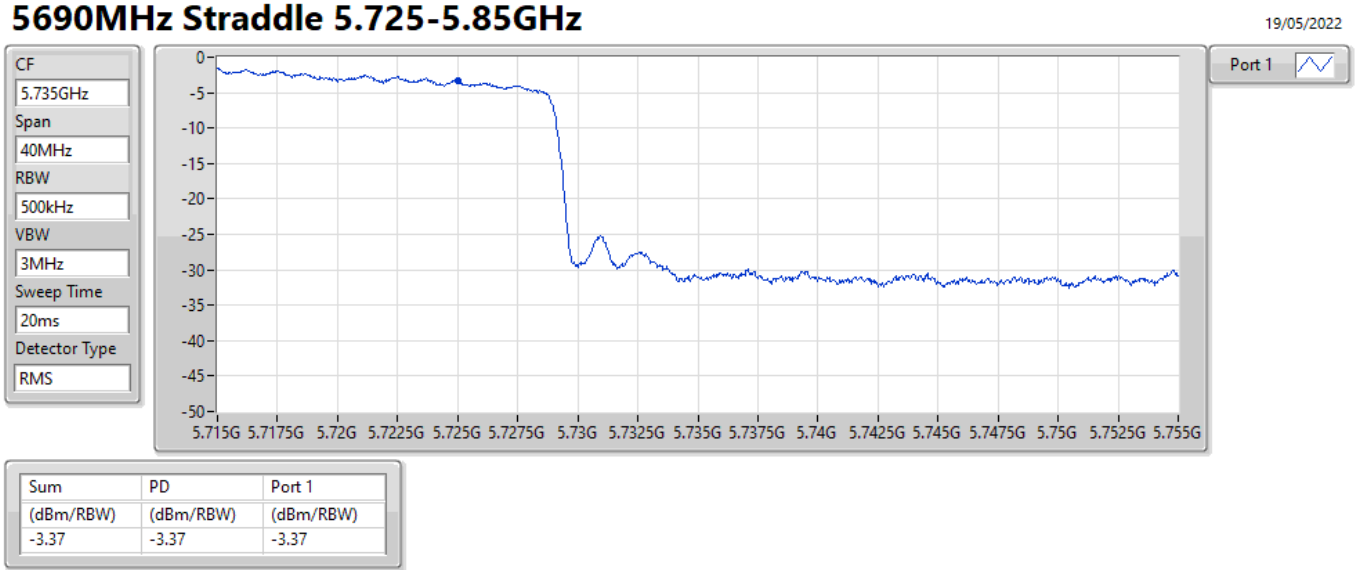

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.37	-3.37	-3.37

802.11ax HEW80_Nss1,(MCS0)_1TX PSD


5775MHz

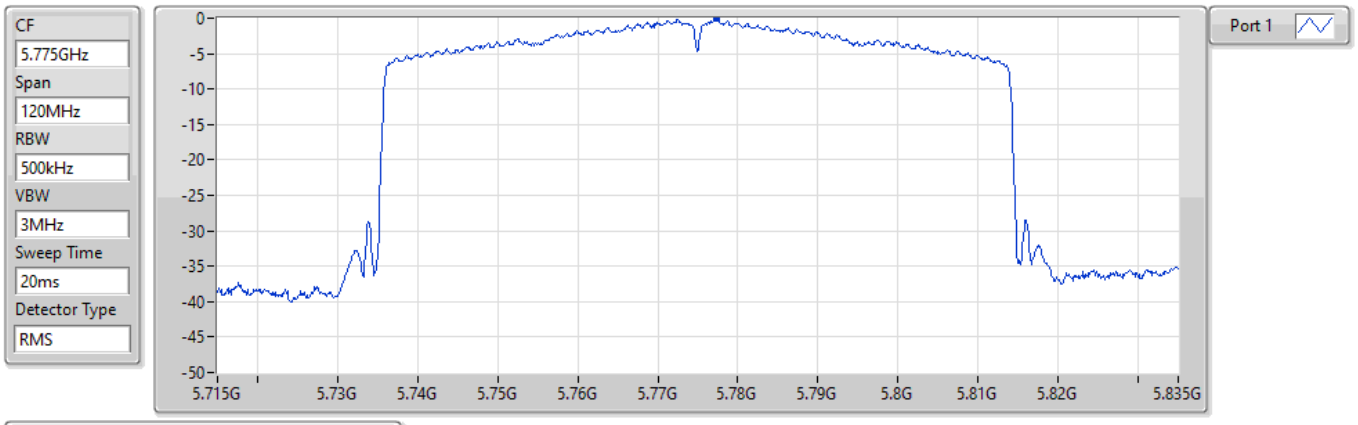

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.06	-0.06	-0.06

802.11ax HEW160_Nss1,(MCS0)_1TX PSD


5250MHz Straddle 5.15-5.25GHz

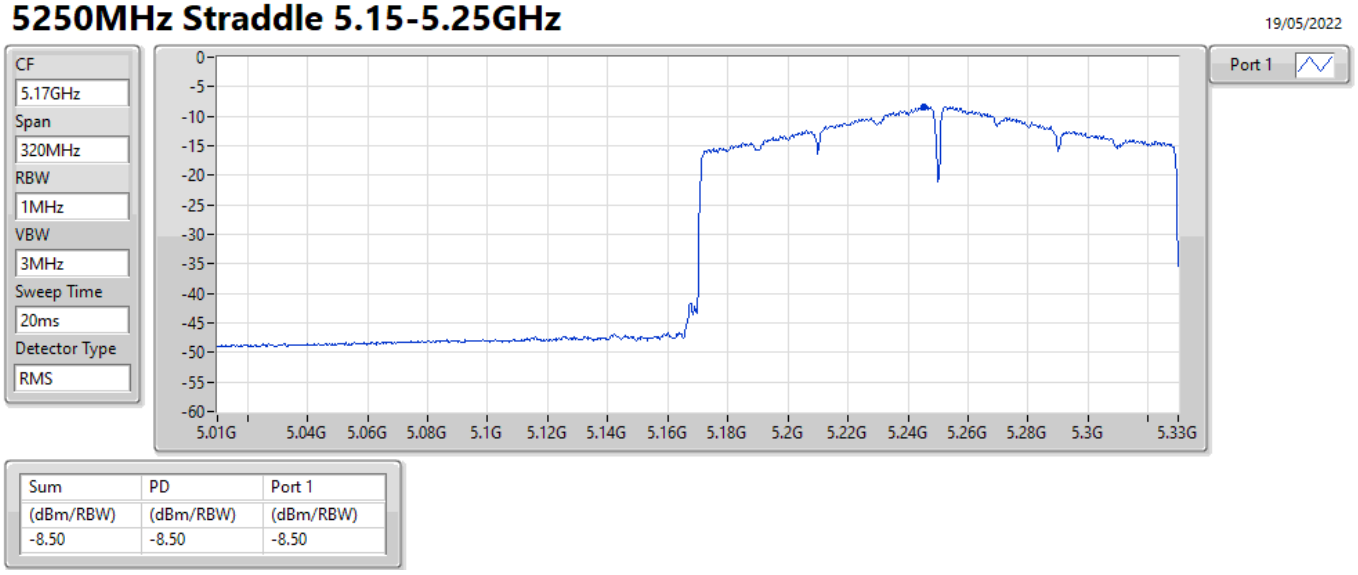


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.50	-8.50	-8.50

802.11ax HEW160_Nss1,(MCS0)_1TX PSD

5250MHz Straddle 5.25-5.35GHz

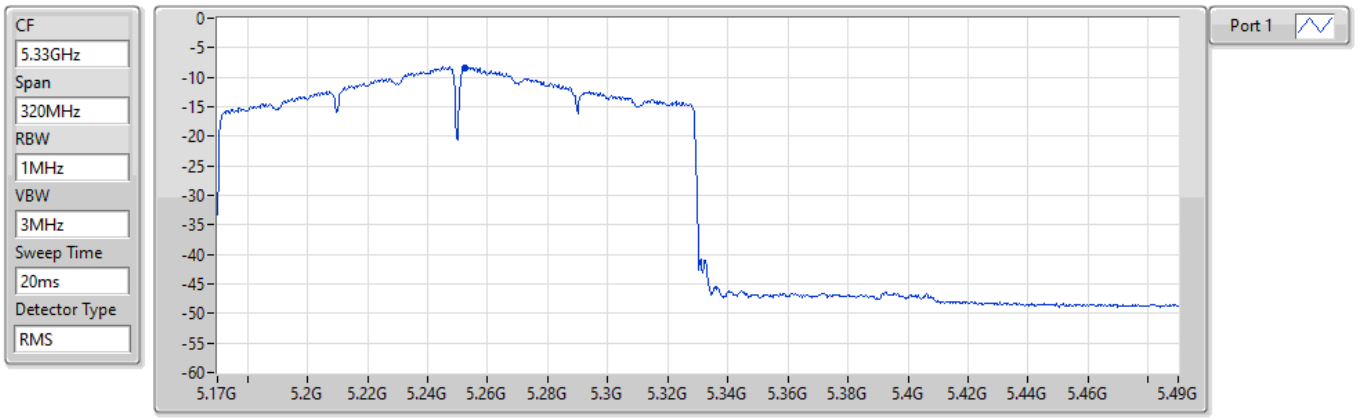

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.35	-8.35	-8.35

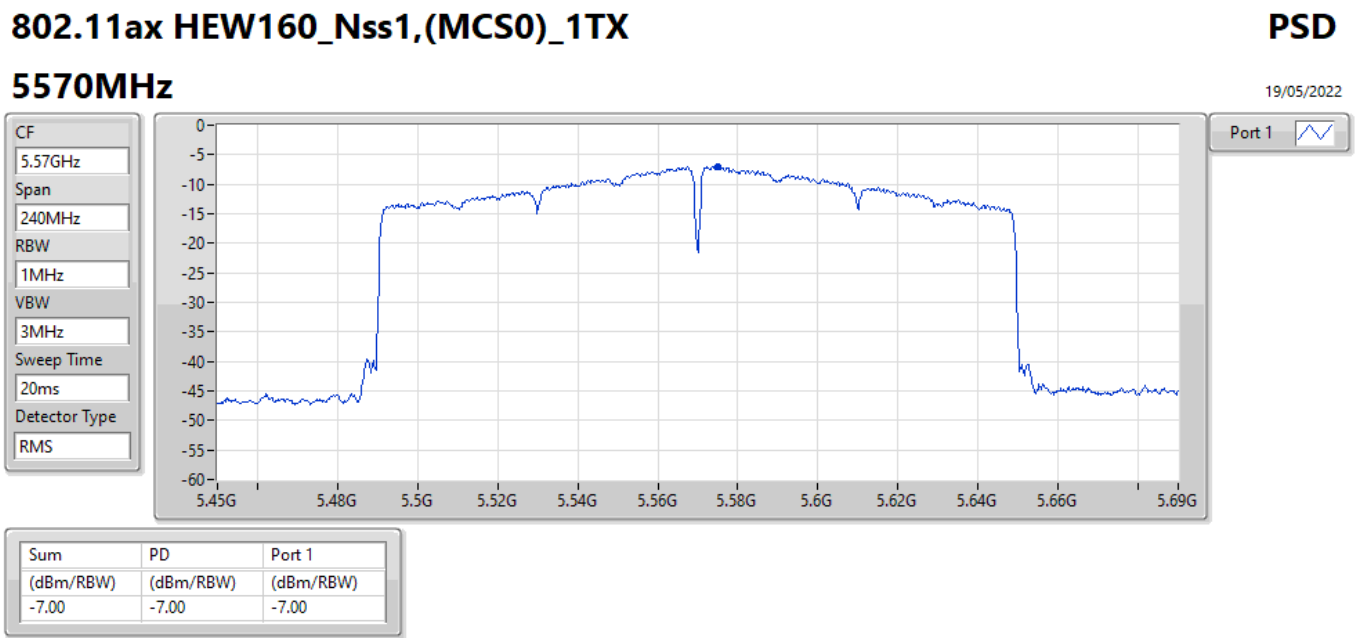
802.11ax HEW160_Nss1,(MCS0)_1TX
PSD
5570MHz
19/05/2022
CF
5.57GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
20ms
Detector Type
RMS
Port 1
0
-5
-10
-15
-20
-25
-30
-35
-40
-45
-50
-55
-60
5.45G
5.48G
5.5G
5.52G
5.54G
5.56G
5.58G
5.6G
5.62G
5.64G
5.66G
5.69G
Sum
PD
Port 1
(dBm/RBW)
(dBm/RBW)
(dBm/RBW)
-7.00
-7.00
-7.00

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_2TX	9.11
802.11ax HEW20_Nss1,(MCS0)_2TX	9.11
802.11ax HEW40_Nss1,(MCS0)_2TX	8.82
802.11ax HEW80_Nss1,(MCS0)_2TX	-0.93
802.11ax HEW160_Nss1,(MCS0)_2TX	-6.08
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_2TX	8.97
802.11ax HEW20_Nss1,(MCS0)_2TX	9.10
802.11ax HEW40_Nss1,(MCS0)_2TX	8.63
802.11ax HEW80_Nss1,(MCS0)_2TX	-1.23
802.11ax HEW160_Nss1,(MCS0)_2TX	-5.96
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_2TX	8.93
802.11ax HEW20_Nss1,(MCS0)_2TX	9.01
802.11ax HEW40_Nss1,(MCS0)_2TX	8.5
802.11ax HEW80_Nss1,(MCS0)_2TX	3.12
802.11ax HEW160_Nss1,(MCS0)_2TX	-5.28
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_2TX	11.82
802.11ax HEW20_Nss1,(MCS0)_2TX	11.25
802.11ax HEW40_Nss1,(MCS0)_2TX	8.65
802.11ax HEW80_Nss1,(MCS0)_2TX	1.41

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.87	6.25	5.99	9.11	9.13
5200MHz	Pass	7.87	6.27	5.98	9.09	9.13
5240MHz	Pass	7.87	5.96	6.17	9.06	9.13
5260MHz	Pass	7.87	5.86	6.13	8.97	9.13
5300MHz	Pass	7.87	5.94	5.66	8.80	9.13
5320MHz	Pass	7.87	5.92	5.85	8.89	9.13
5500MHz	Pass	7.87	5.79	5.99	8.86	9.13
5580MHz	Pass	7.87	5.73	6.07	8.91	9.13
5700MHz	Pass	7.87	3.89	4.09	6.97	9.13
5720MHz Straddle 5.47-5.725GHz	Pass	7.87	5.73	6.1	8.93	9.13
5720MHz Straddle 5.725-5.85GHz	Pass	7.87	1.67	2.29	5.00	28.13
5745MHz	Pass	7.87	8.18	8.07	11.12	28.13
5785MHz	Pass	7.87	8.72	9	11.82	28.13
5825MHz	Pass	7.87	8.54	7.61	11.09	28.13
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.87	6.06	6.14	9.11	9.13
5200MHz	Pass	7.87	5.75	5.98	8.87	9.13
5240MHz	Pass	7.87	5.77	5.96	8.84	9.13
5260MHz	Pass	7.87	5.67	6	8.82	9.13
5300MHz	Pass	7.87	6.17	6.07	9.10	9.13
5320MHz	Pass	7.87	5.87	5.88	8.86	9.13
5500MHz	Pass	7.87	5.91	6.11	9.01	9.13
5580MHz	Pass	7.87	5.74	6.11	8.93	9.13
5700MHz	Pass	7.87	2.44	3.29	5.84	9.13
5720MHz Straddle 5.47-5.725GHz	Pass	7.87	5.82	6.15	8.97	9.13
5720MHz Straddle 5.725-5.85GHz	Pass	7.87	1.57	1.97	4.77	28.13
5745MHz	Pass	7.87	8.25	8.34	11.25	28.13
5785MHz	Pass	7.87	8.29	8.23	11.24	28.13
5825MHz	Pass	7.87	8.25	7.29	10.74	28.13
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	7.87	1.17	1.31	4.17	9.13
5230MHz	Pass	7.87	6.02	5.6	8.82	9.13
5270MHz	Pass	7.87	5.58	5.72	8.63	9.13
5310MHz	Pass	7.87	1.12	1.32	4.20	9.13
5510MHz	Pass	7.87	1.15	1.57	4.27	9.13
5550MHz	Pass	7.87	5.99	4.93	8.50	9.13
5670MHz	Pass	7.87	1.12	1.63	4.33	9.13
5710MHz Straddle 5.47-5.725GHz	Pass	7.87	5.5	4.9	8.20	9.13
5710MHz Straddle 5.725-5.85GHz	Pass	7.87	-0.53	-1.16	2.16	28.13
5755MHz	Pass	7.87	5.76	5.57	8.65	28.13
5795MHz	Pass	7.87	5.88	5.24	8.55	28.13
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	7.87	-4.03	-3.75	-0.93	9.13
5290MHz	Pass	7.87	-4.35	-4.07	-1.23	9.13
5530MHz	Pass	7.87	-3.03	-2.81	0.01	9.13
5610MHz	Pass	7.87	-2.06	-1.62	1.14	9.13
5690MHz Straddle 5.47-5.725GHz	Pass	7.87	0.04	0.18	3.12	9.13
5690MHz Straddle 5.725-5.85GHz	Pass	7.87	-6.31	-5.93	-3.12	28.13
5775MHz	Pass	7.87	-1.78	-1.30	1.41	28.13
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
5250MHz Straddle 5.15-5.25GHz	Pass	7.87	-8.76	-9.28	-6.08	9.13
5250MHz Straddle 5.25-5.35GHz	Pass	7.87	-8.79	-9.14	-5.96	9.13
5570MHz	Pass	7.87	-8.15	-8.31	-5.28	9.13

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11a_Nss1,(6Mbps)_2TX PSD


5180MHz

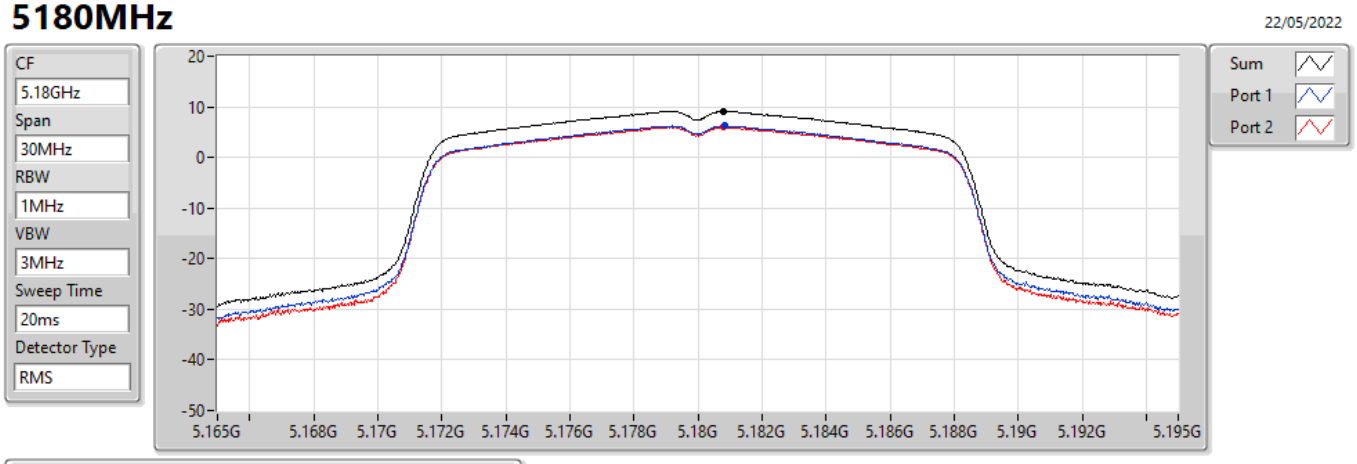

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.11	9.11	6.25	5.99

802.11a_Nss1,(6Mbps)_2TX PSD


5200MHz

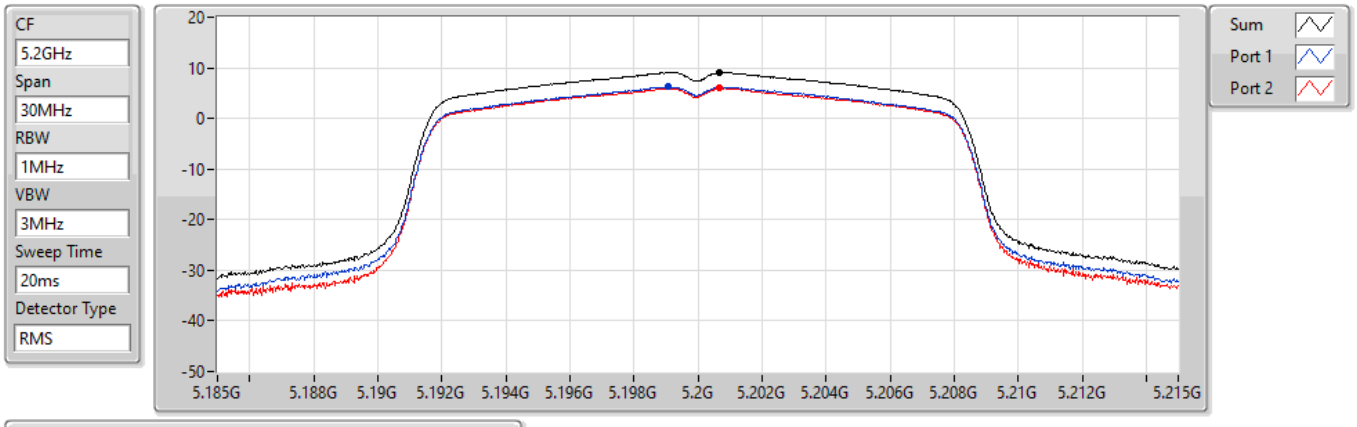

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.09	9.09	6.27	5.98

802.11a_Nss1,(6Mbps)_2TX PSD


5240MHz

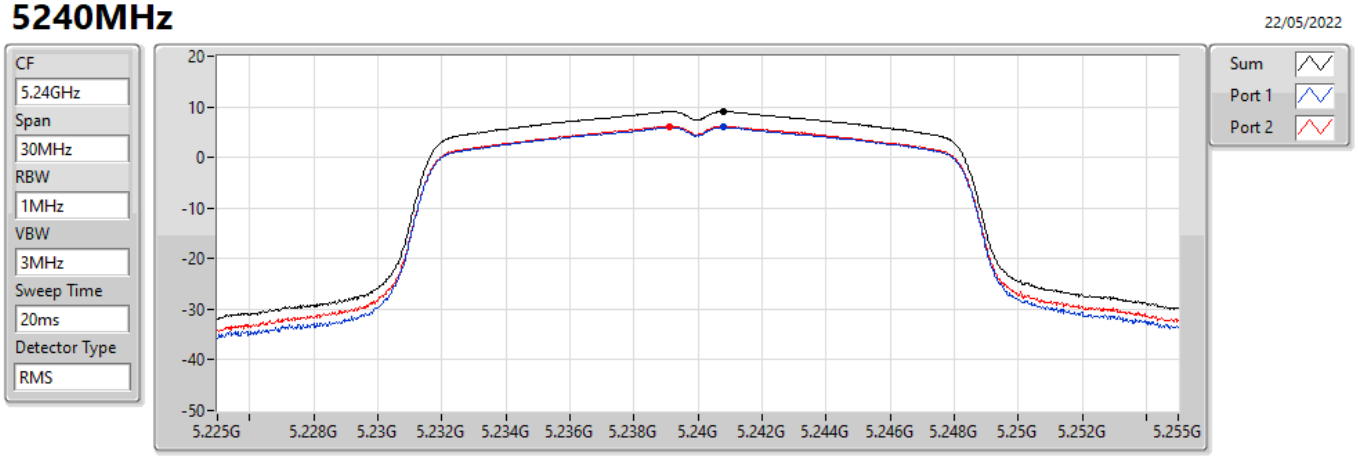

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.06	9.06	5.96	6.17

802.11a_Nss1,(6Mbps)_2TX PSD


5260MHz

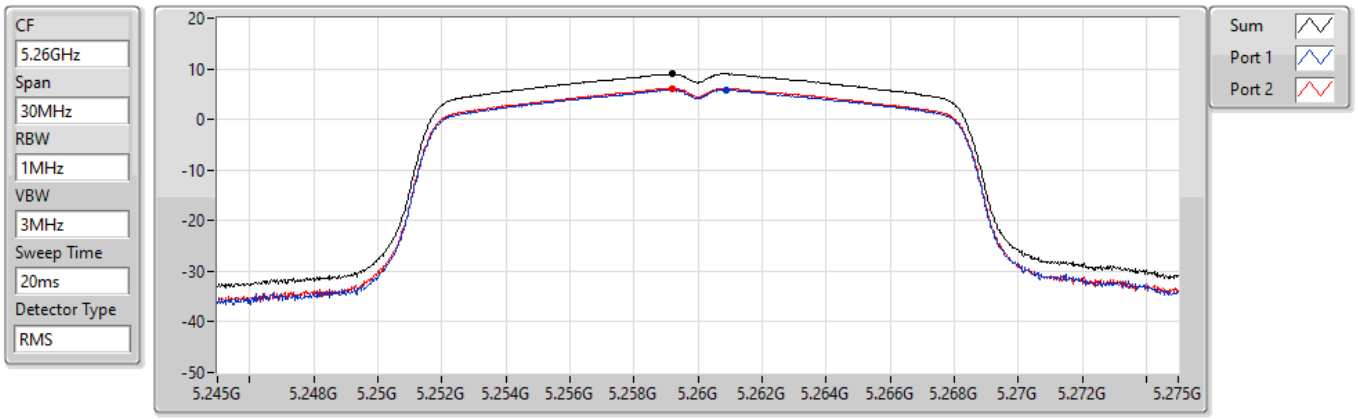

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.97	8.97	5.86	6.13

802.11a_Nss1,(6Mbps)_2TX PSD


5300MHz

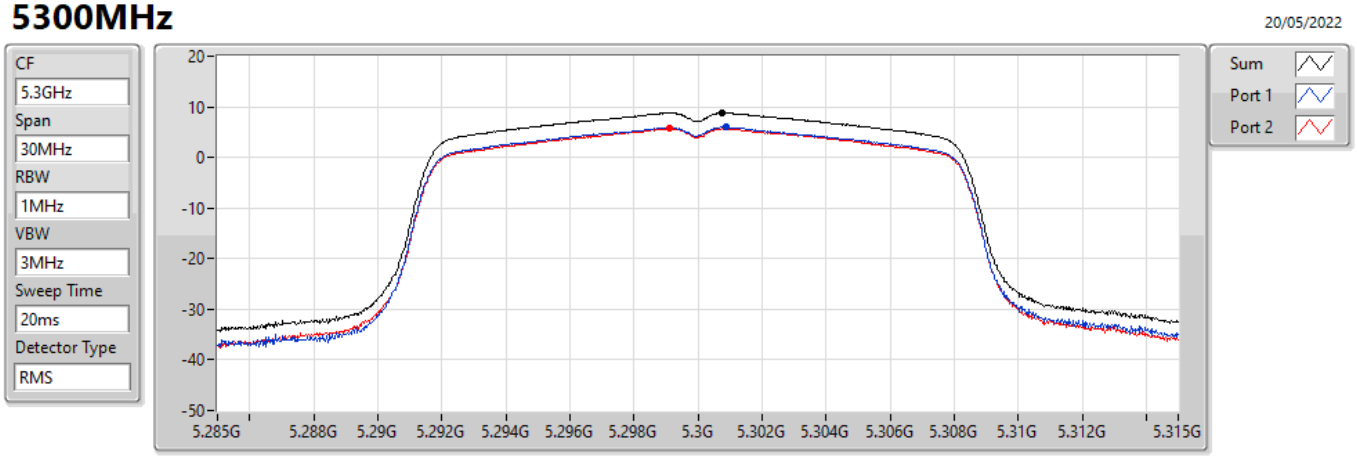

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.80	8.80	5.94	5.66

802.11a_Nss1,(6Mbps)_2TX PSD


5320MHz

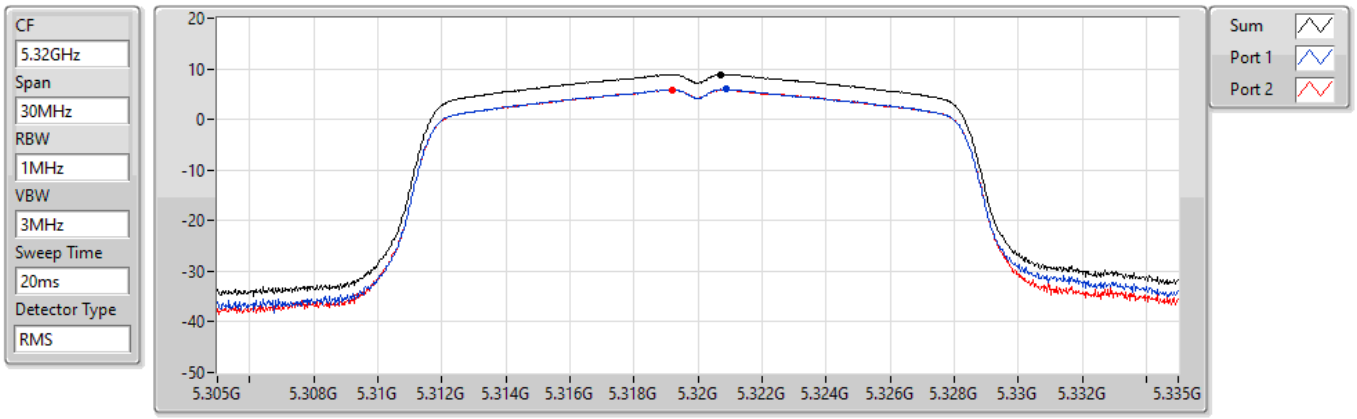

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.89	8.89	5.92	5.85

802.11a_Nss1,(6Mbps)_2TX PSD


5500MHz

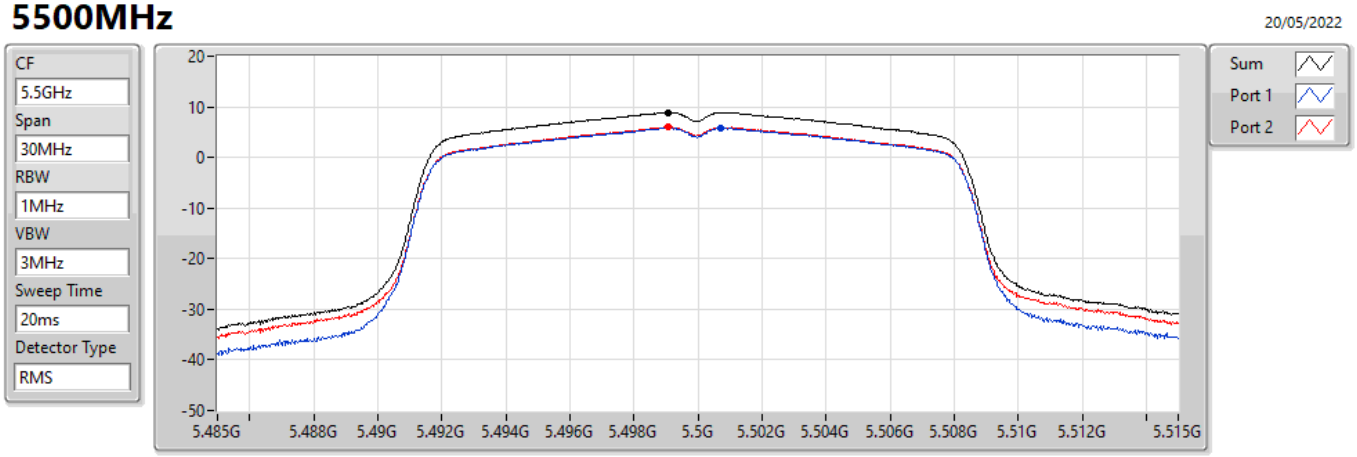

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.86	8.86	5.79	5.99

802.11a_Nss1,(6Mbps)_2TX PSD


5580MHz

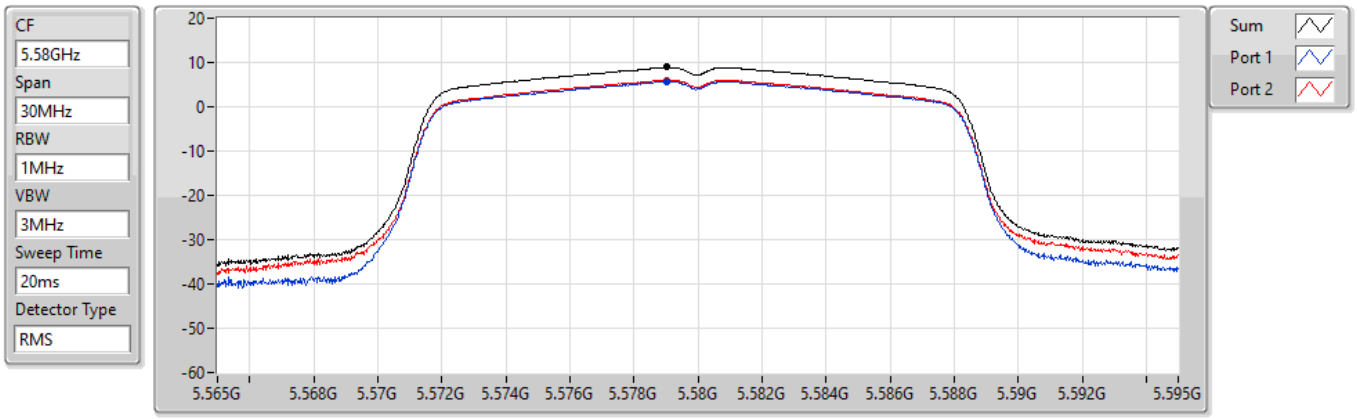

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.91	8.91	5.73	6.07

802.11a_Nss1,(6Mbps)_2TX PSD


5700MHz

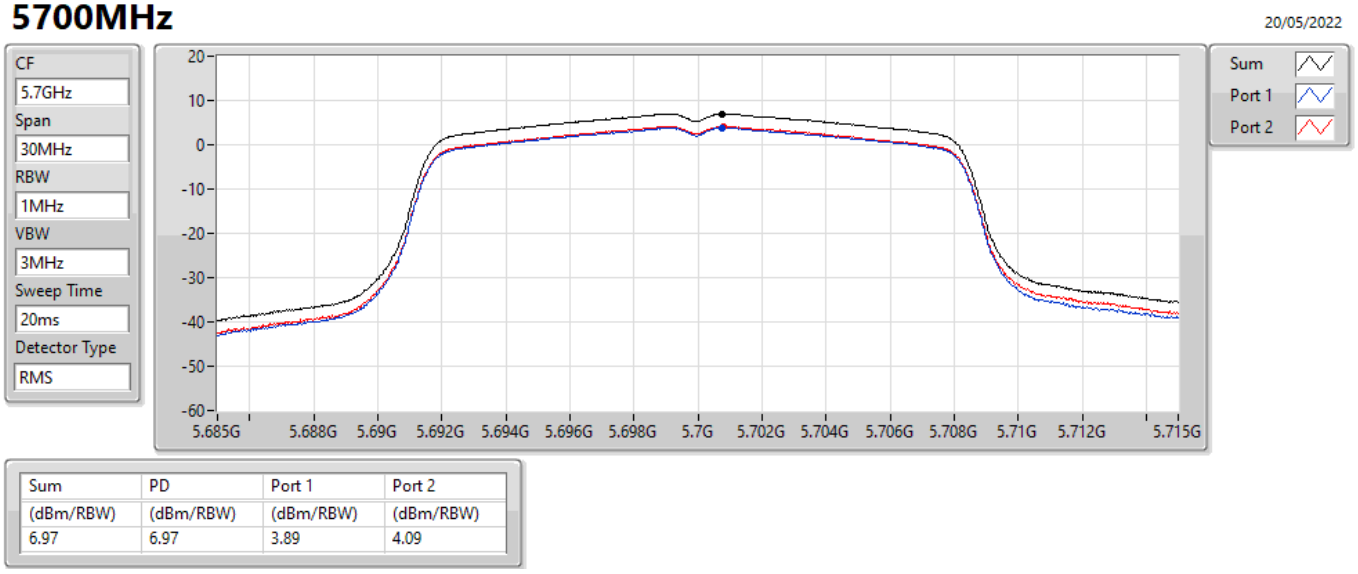

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.97	6.97	3.89	4.09

802.11a_Nss1,(6Mbps)_2TX PSD


5720MHz Straddle 5.47-5.725GHz

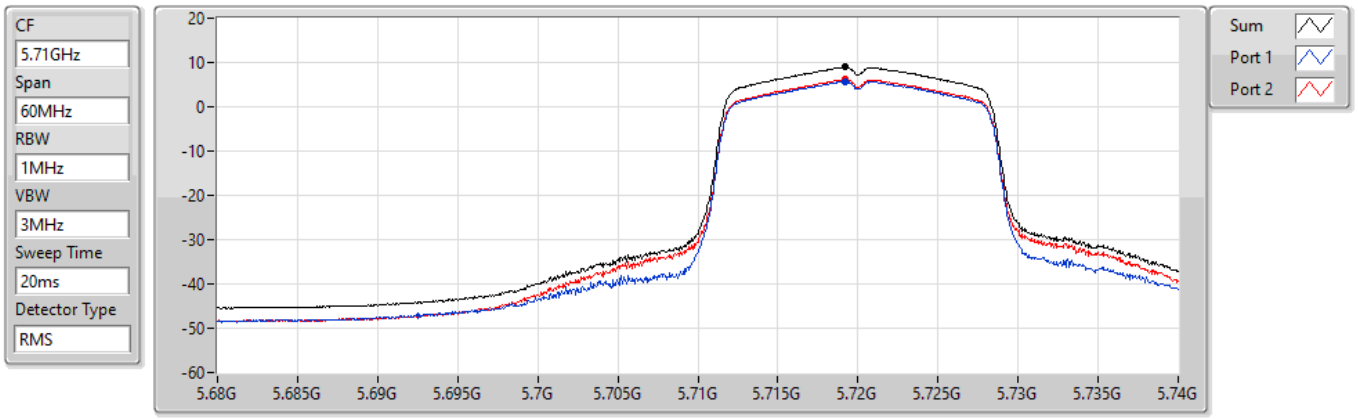

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.93	8.93	5.73	6.10

802.11a_Nss1,(6Mbps)_2TX PSD


5720MHz Straddle 5.725-5.85GHz

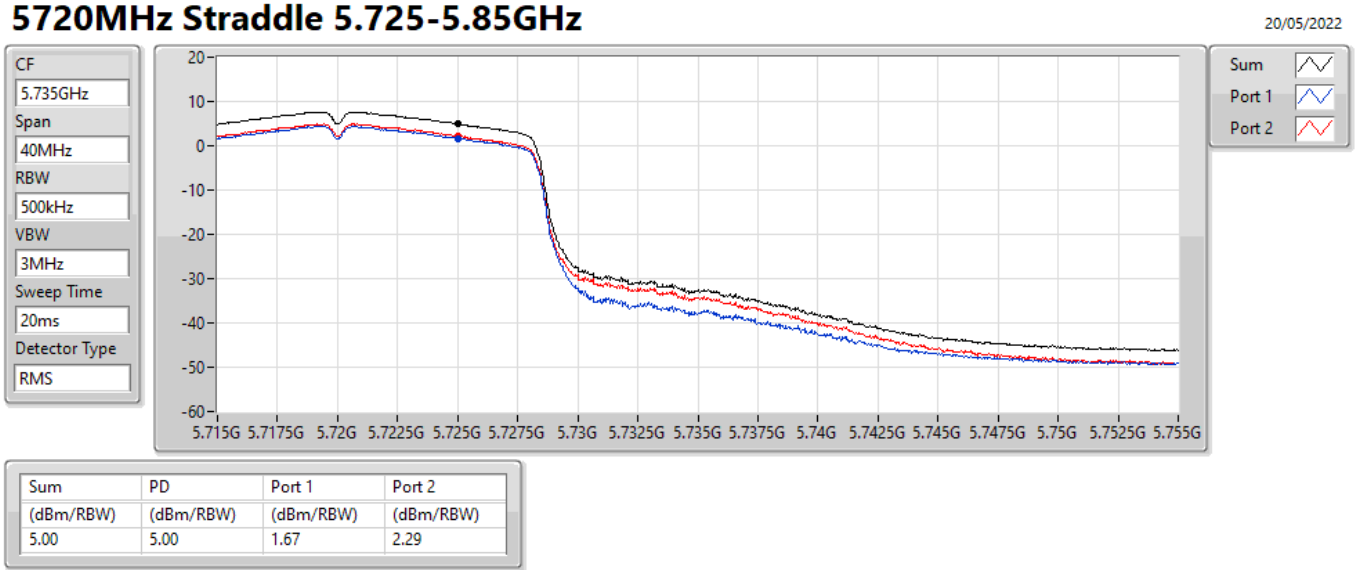

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.00	5.00	1.67	2.29

802.11a_Nss1,(6Mbps)_2TX PSD


5745MHz

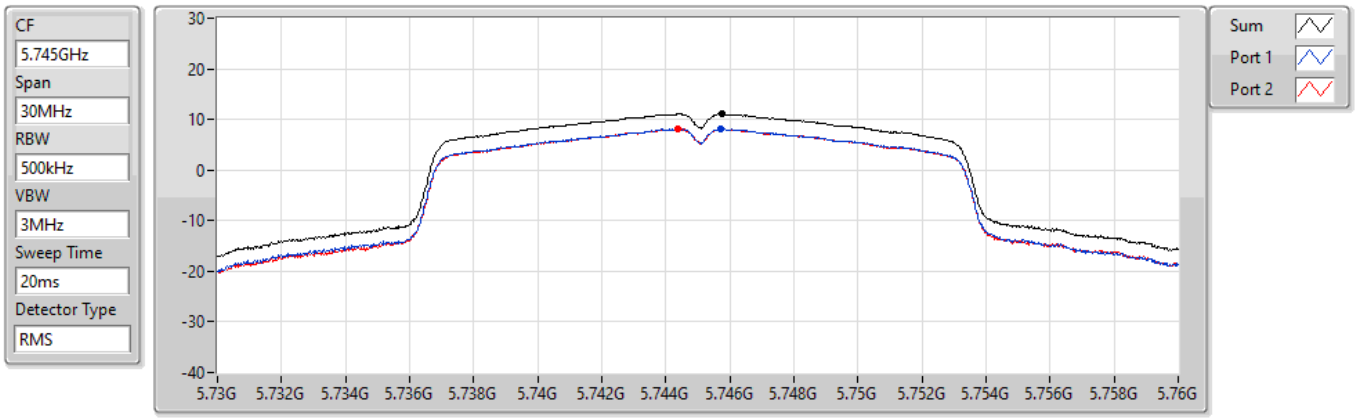

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.12	11.12	8.18	8.07

802.11a_Nss1,(6Mbps)_2TX PSD


5785MHz

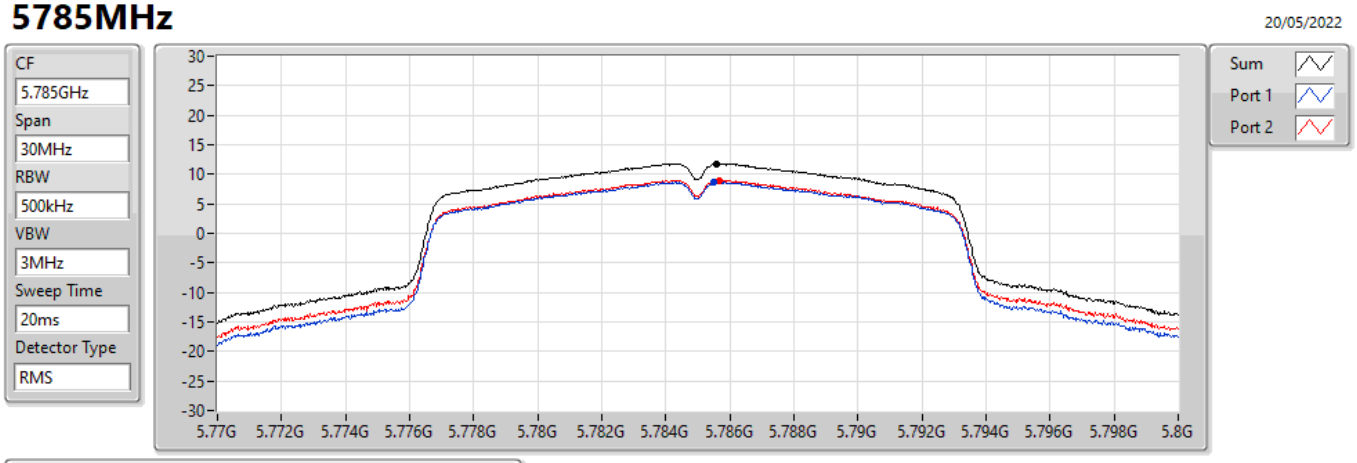

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.82	11.82	8.72	9.00

802.11a_Nss1,(6Mbps)_2TX PSD

5825MHz

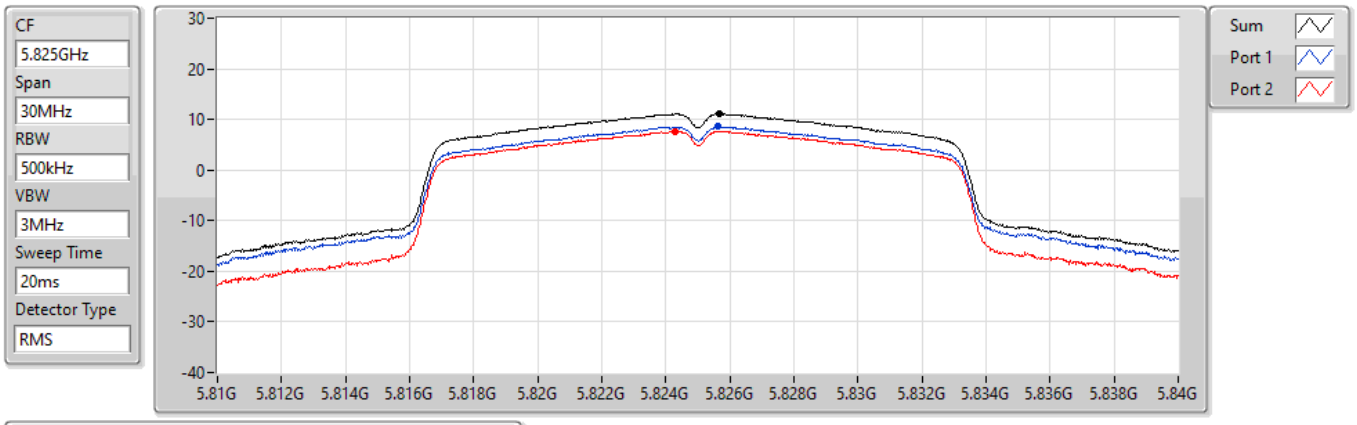


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.09	11.09	8.54	7.61

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5180MHz

22/05/2022

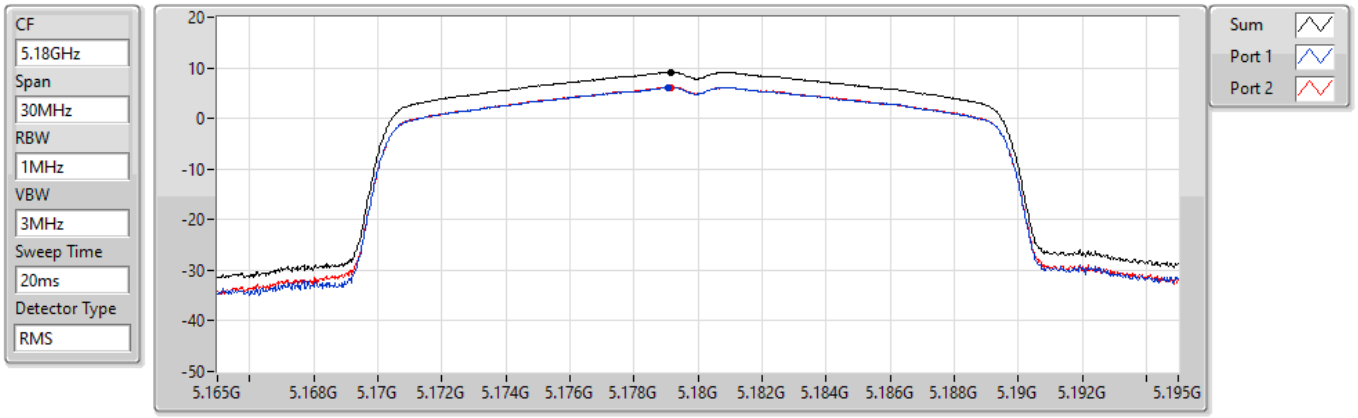


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.11	9.11	6.06	6.14

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5200MHz


20/05/2022

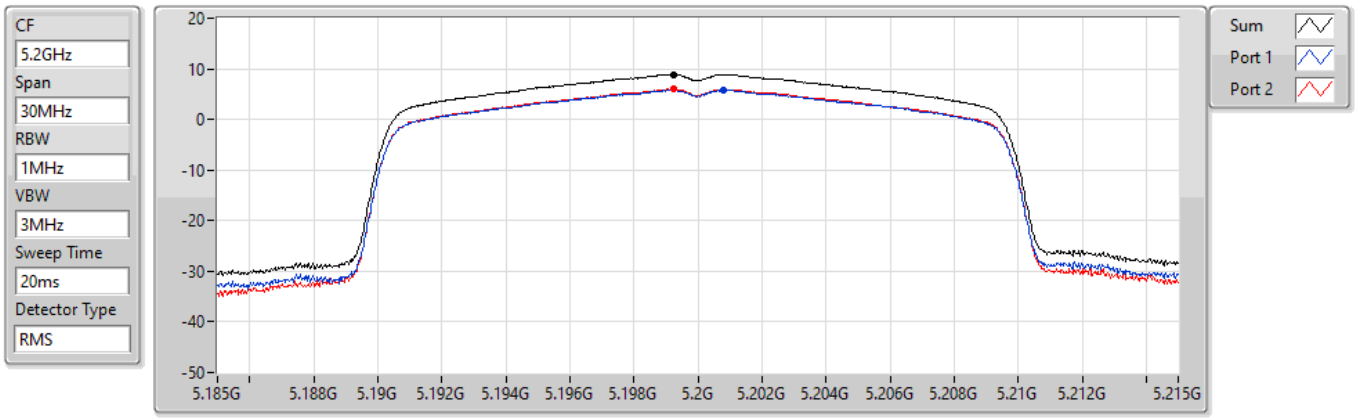

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.87	8.87	5.75	5.98

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5240MHz

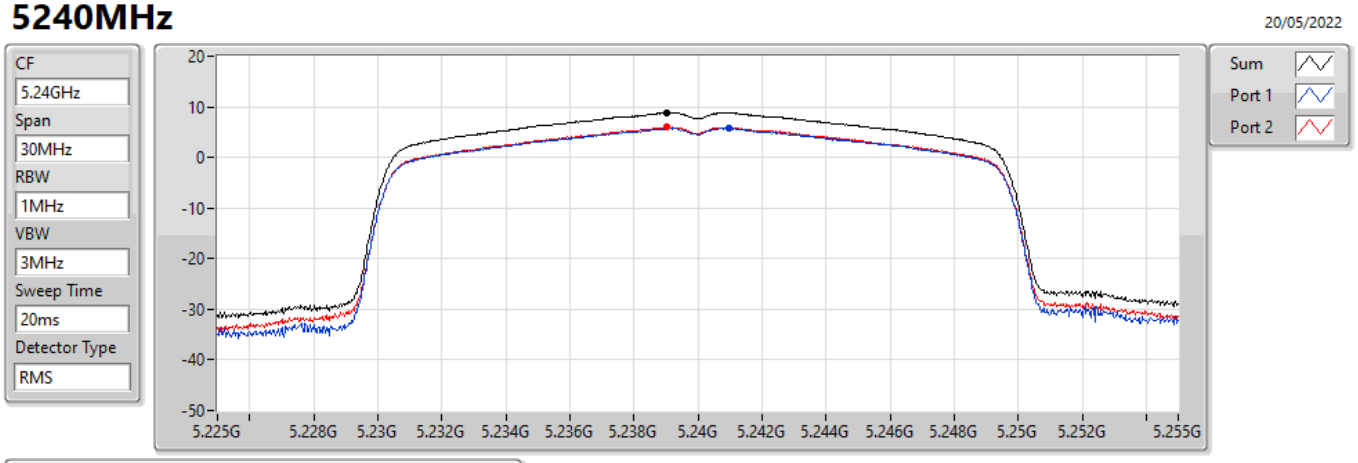

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.84	8.84	5.77	5.96

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5260MHz

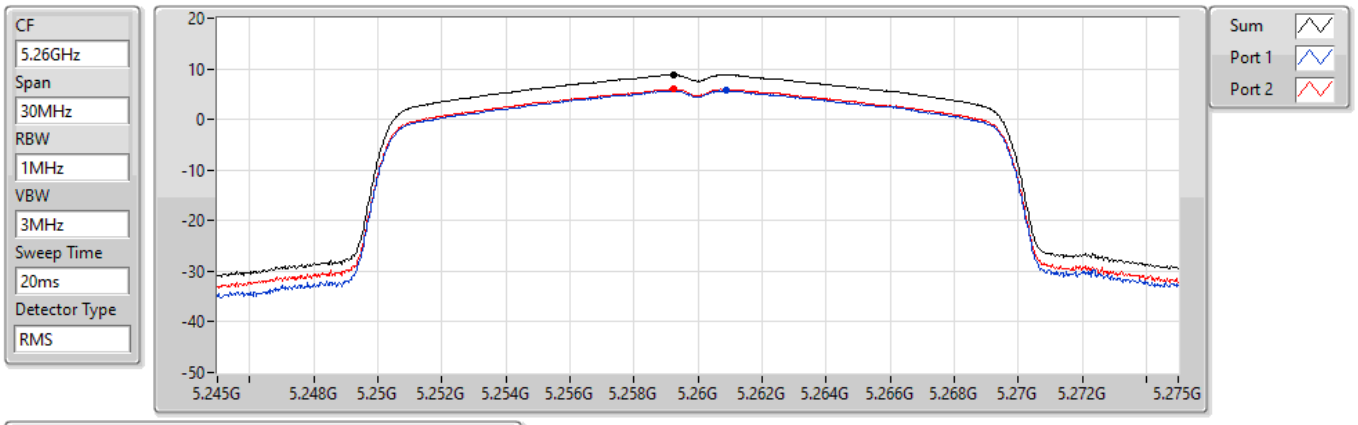

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.82	8.82	5.67	6.00

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5300MHz

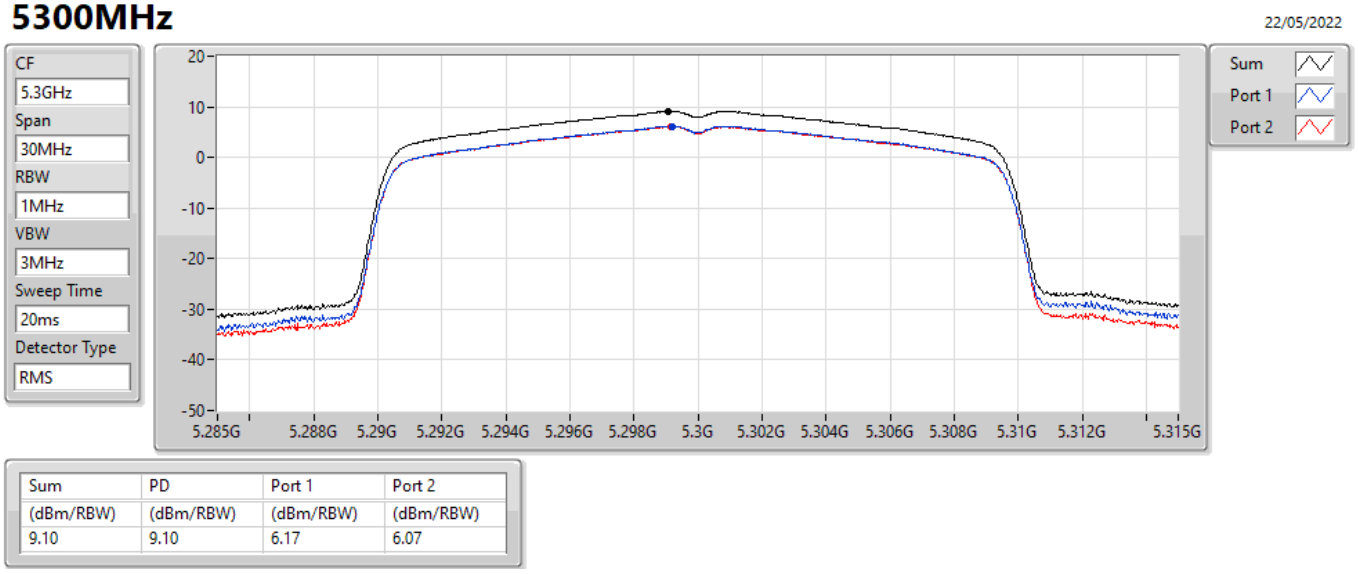

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.10	9.10	6.17	6.07

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5320MHz

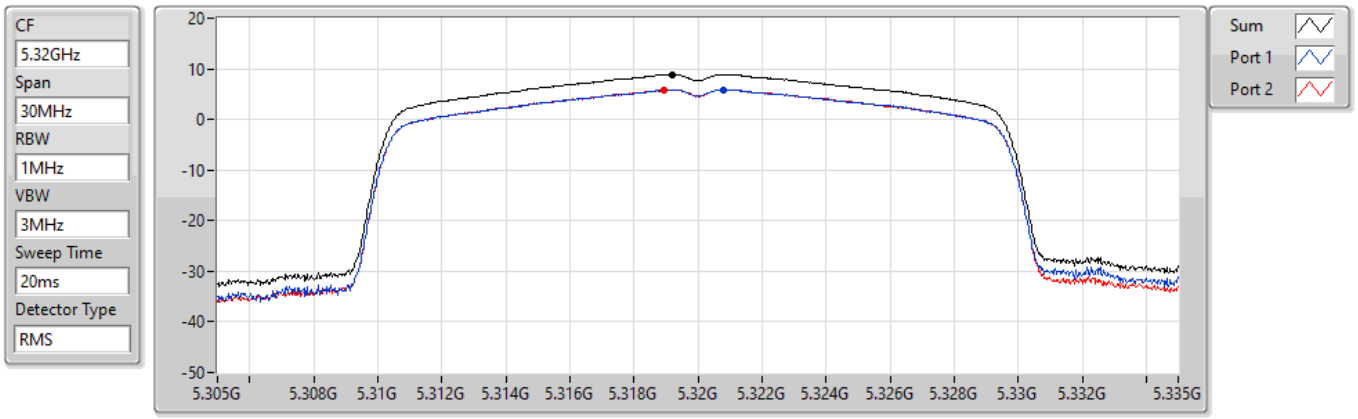

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.86	8.86	5.87	5.88

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5500MHz

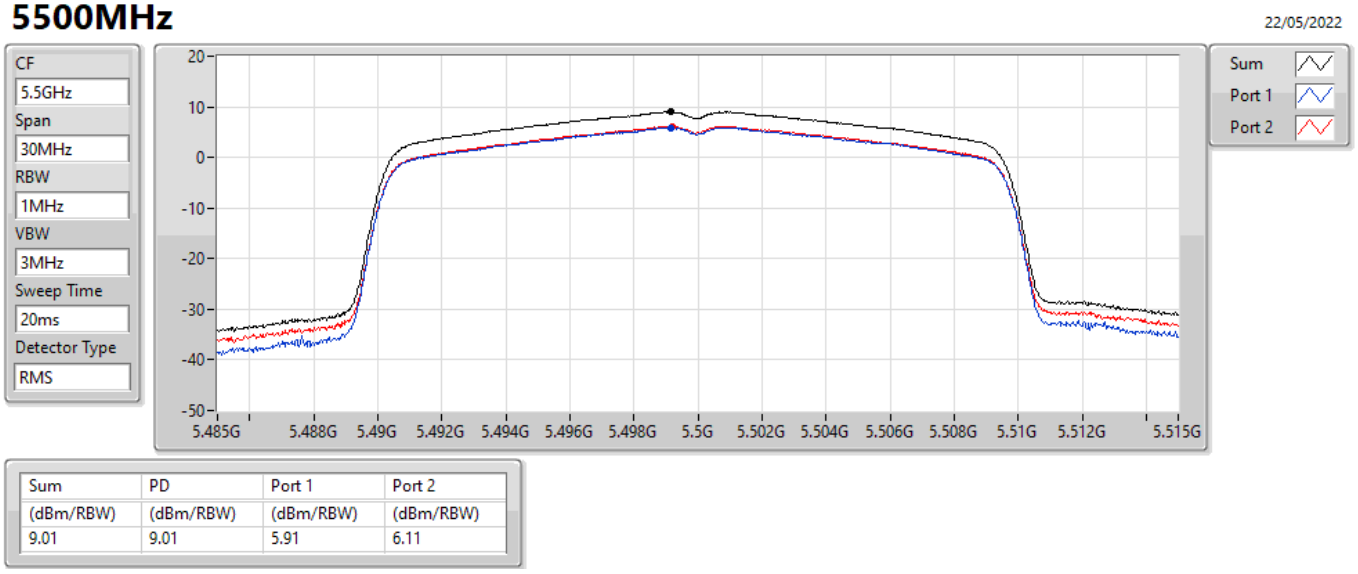

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.01	9.01	5.91	6.11

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5580MHz

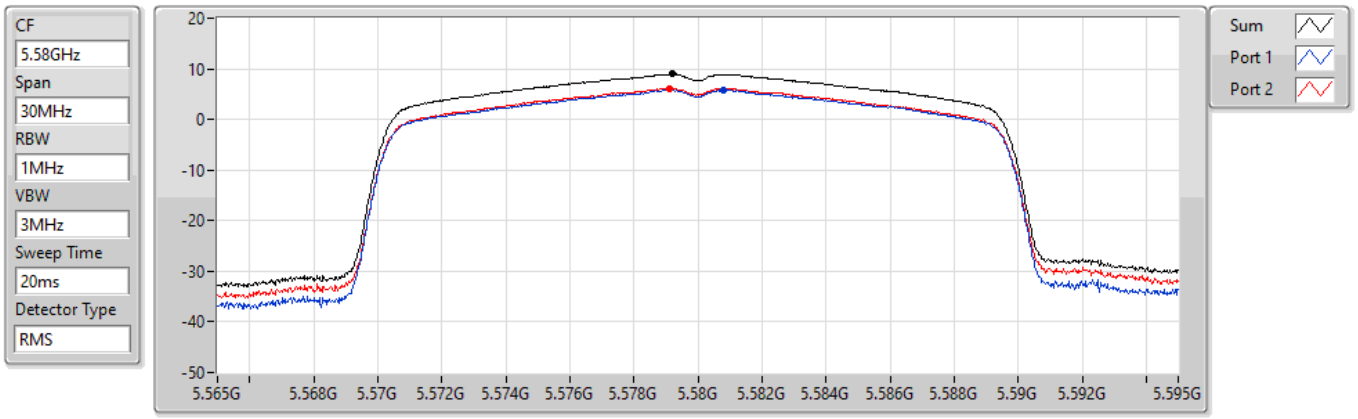


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.93	8.93	5.74	6.11

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5700MHz

22/05/2022

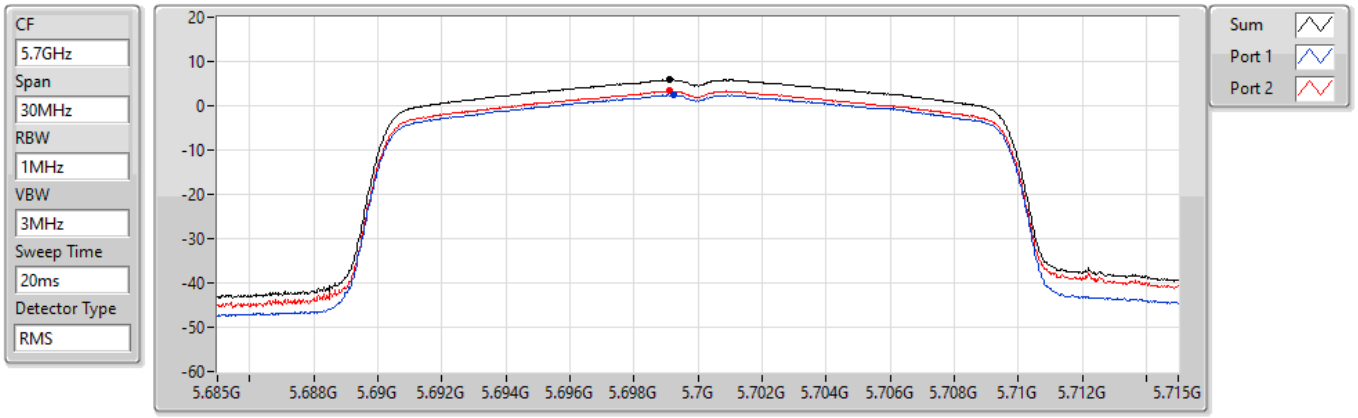


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.84	5.84	2.44	3.29

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5720MHz Straddle 5.47-5.725GHz


20/05/2022

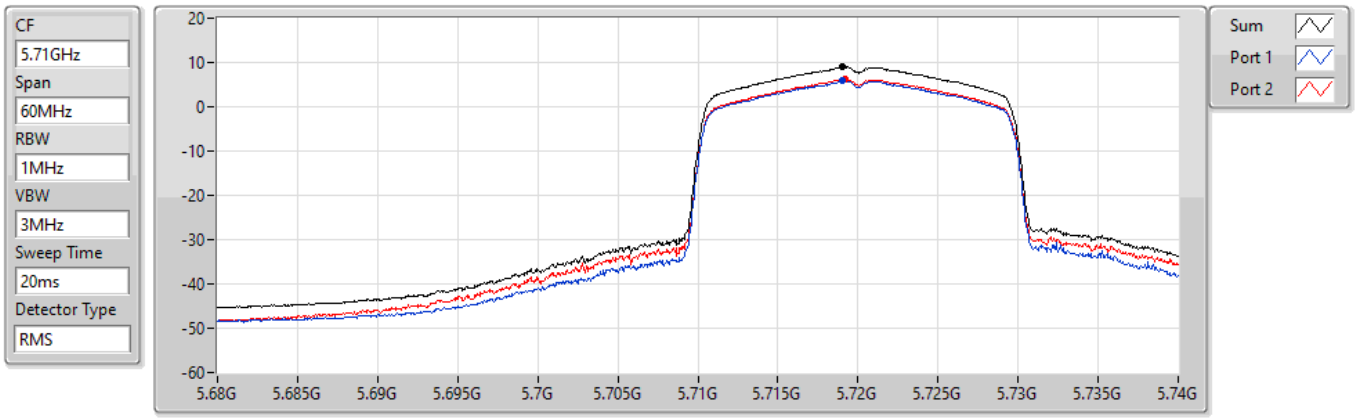

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.97	8.97	5.82	6.15

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.725-5.85GHz

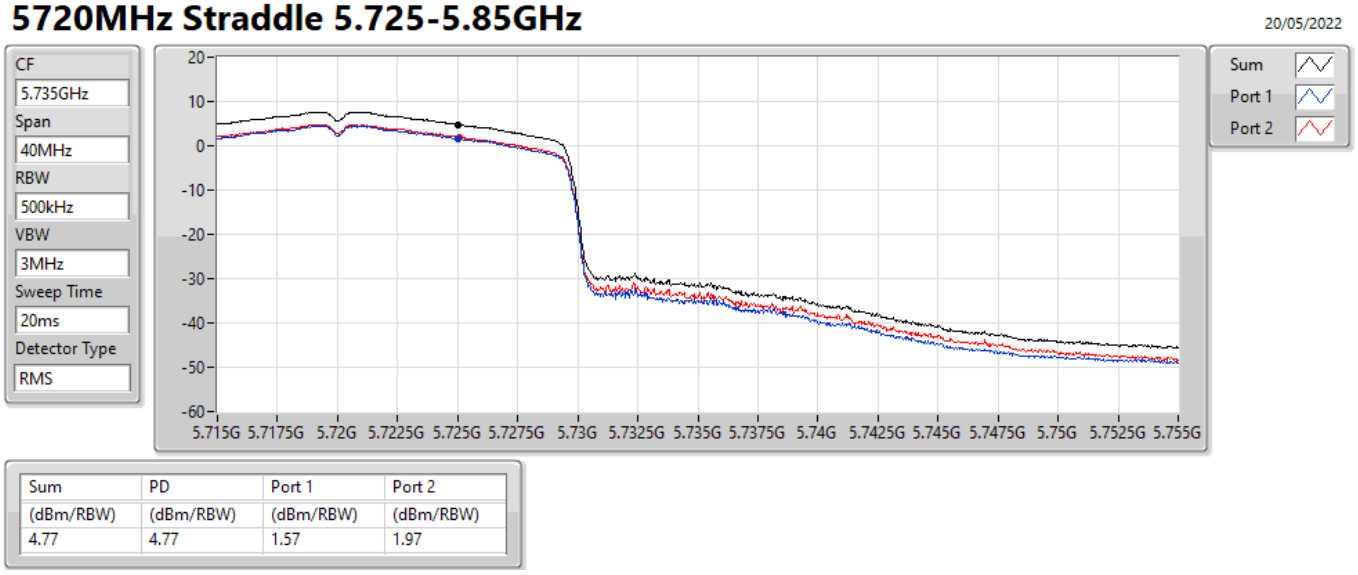

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.77	4.77	1.57	1.97

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5745MHz

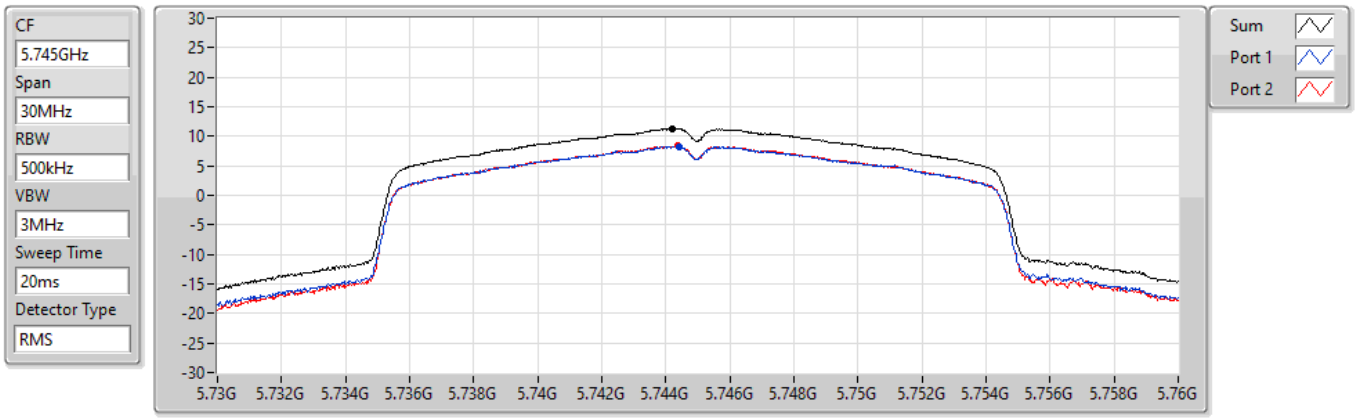

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.25	11.25	8.25	8.34

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5785MHz

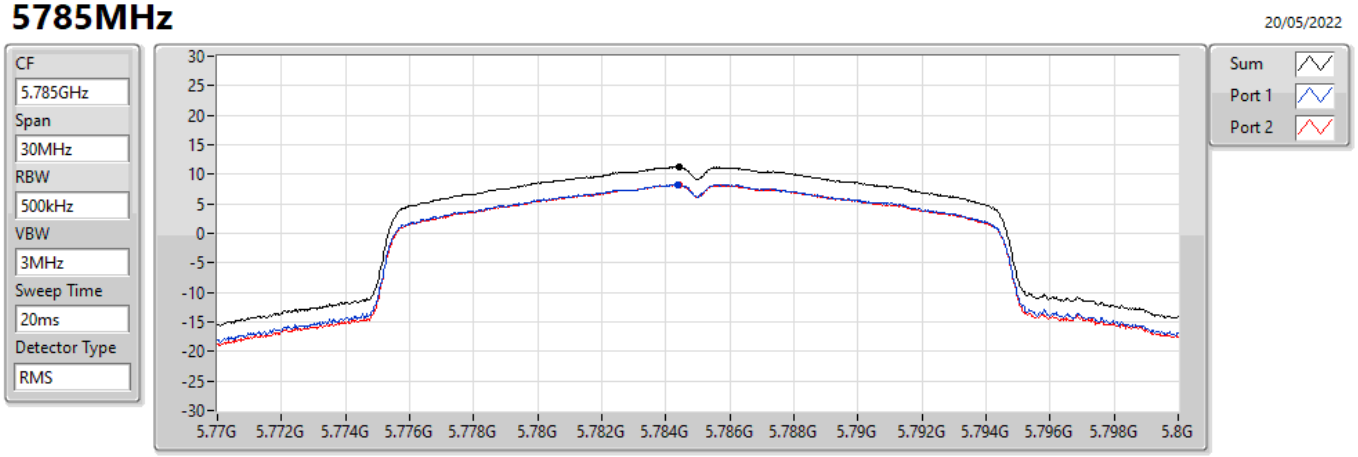

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.24	11.24	8.29	8.23

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5825MHz

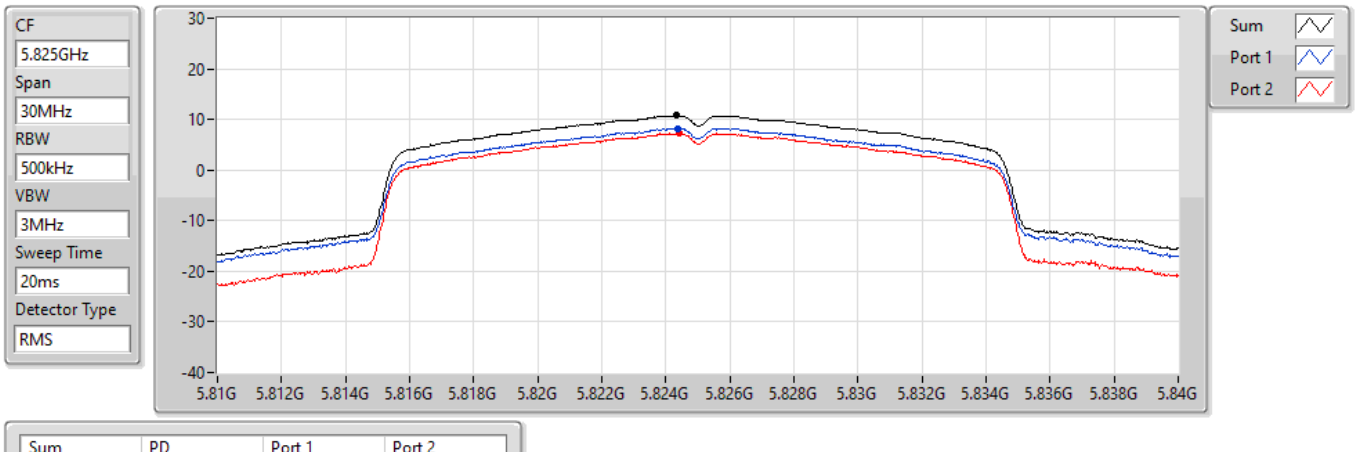

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.74	10.74	8.25	7.29

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5190MHz

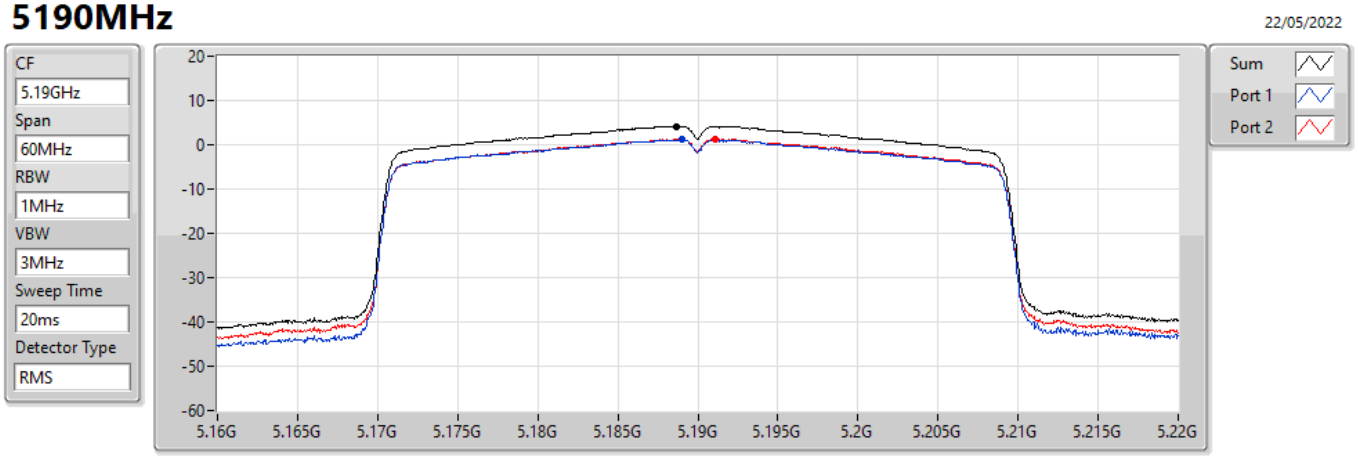

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.17	4.17	1.17	1.31

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5230MHz

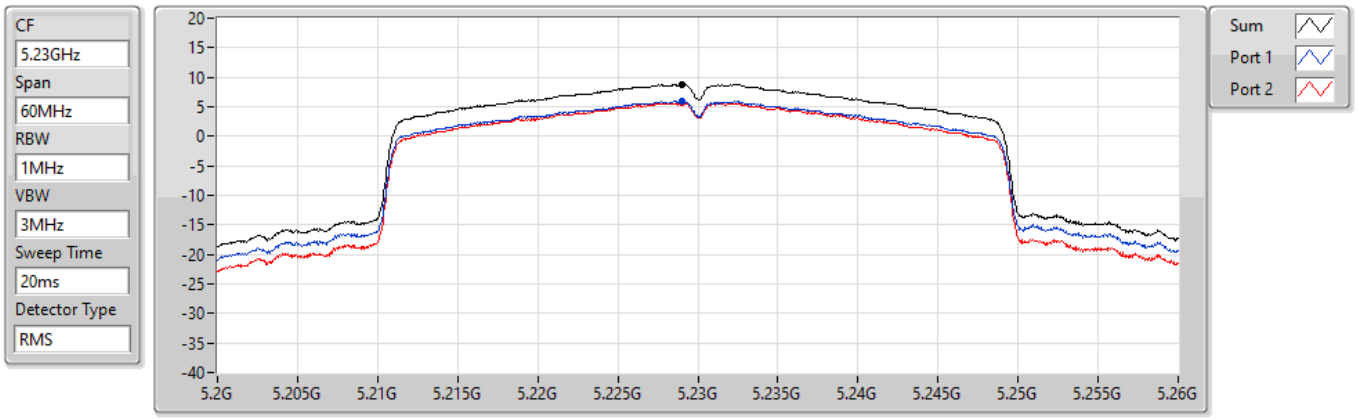

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.82	8.82	6.02	5.60

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5270MHz

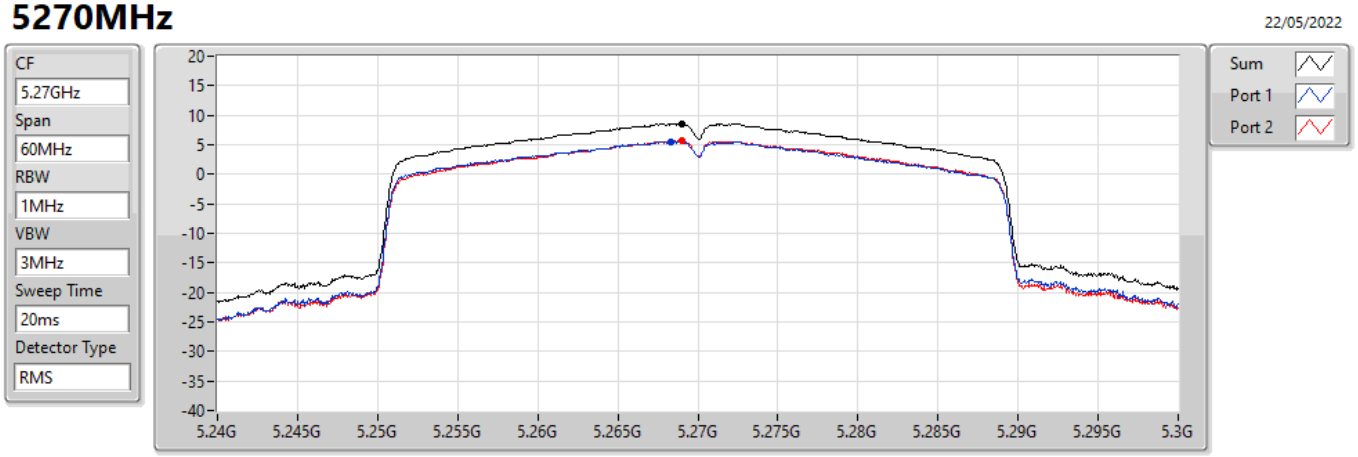

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.63	8.63	5.58	5.72

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5310MHz

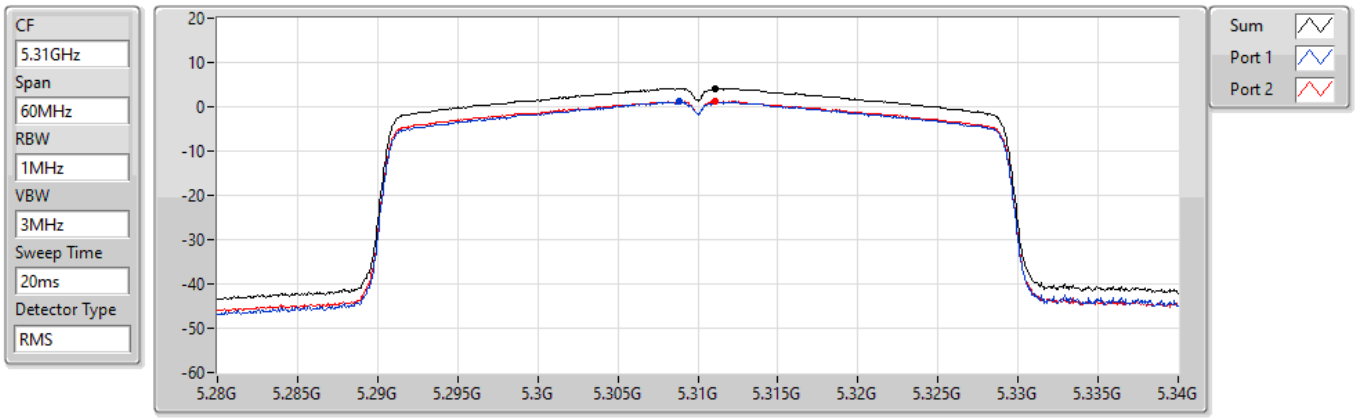

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.20	4.20	1.12	1.32

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5510MHz

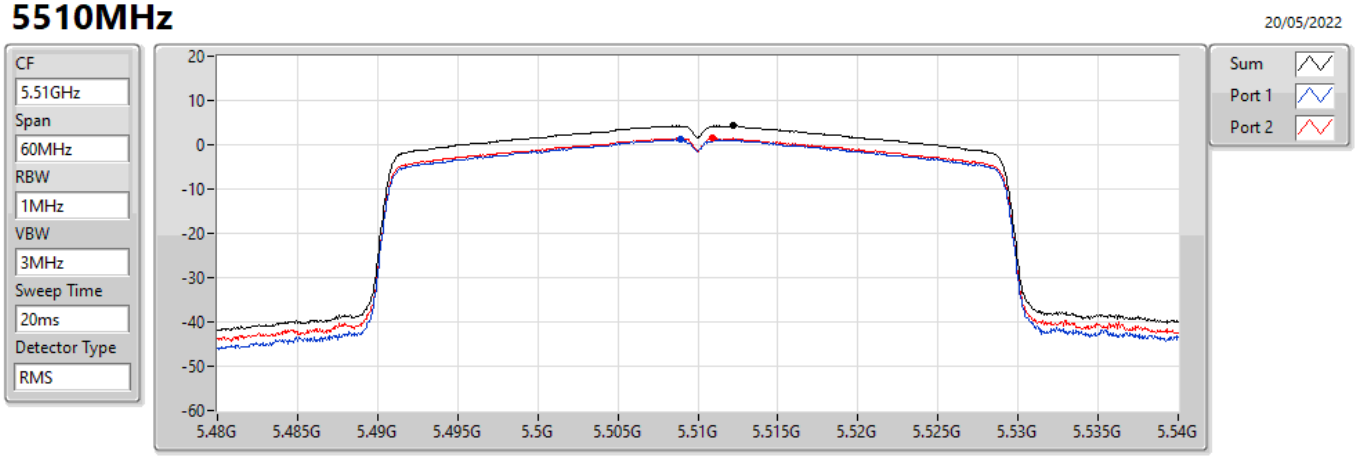

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.27	4.27	1.15	1.57

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5550MHz

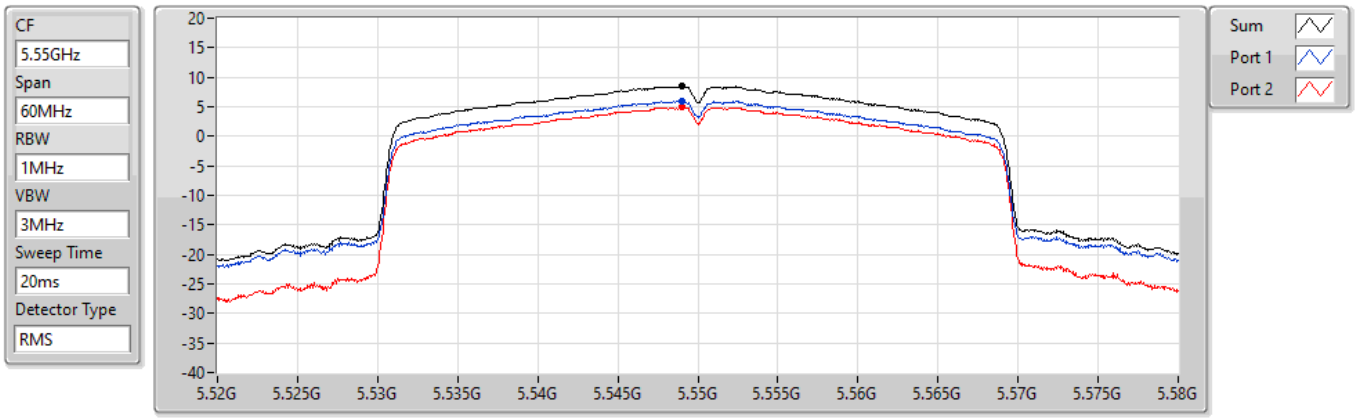

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.50	8.50	5.99	4.93

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5670MHz

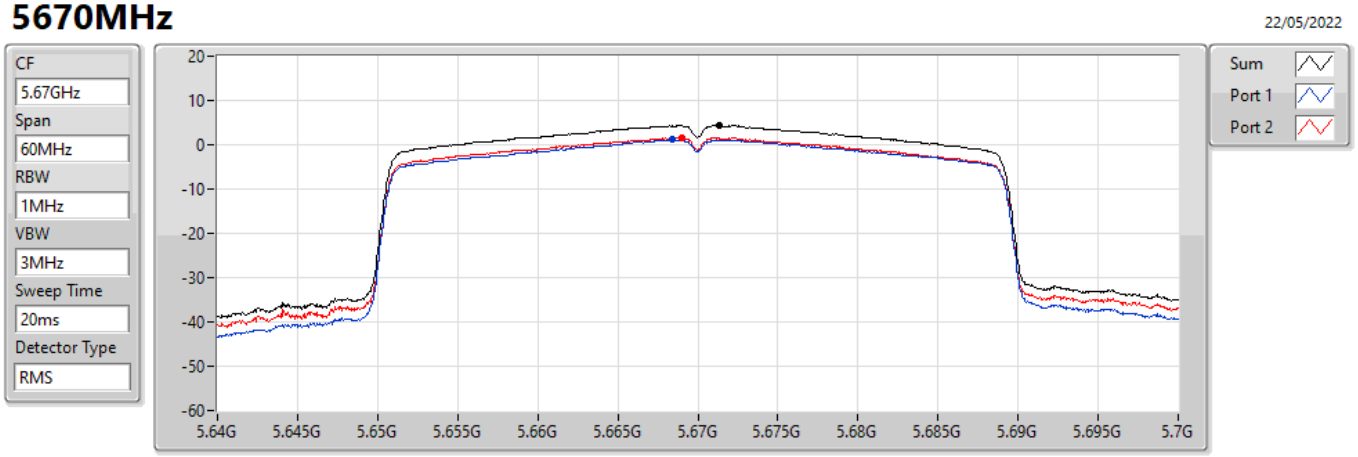

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.33	4.33	1.12	1.63

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5710MHz Straddle 5.47-5.725GHz

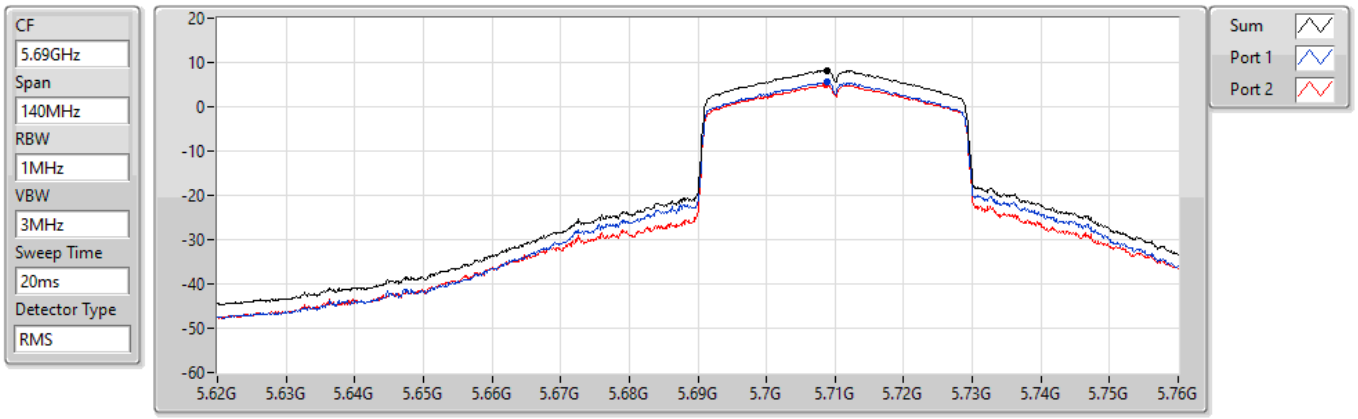

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.20	8.20	5.50	4.90

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5710MHz Straddle 5.725-5.85GHz

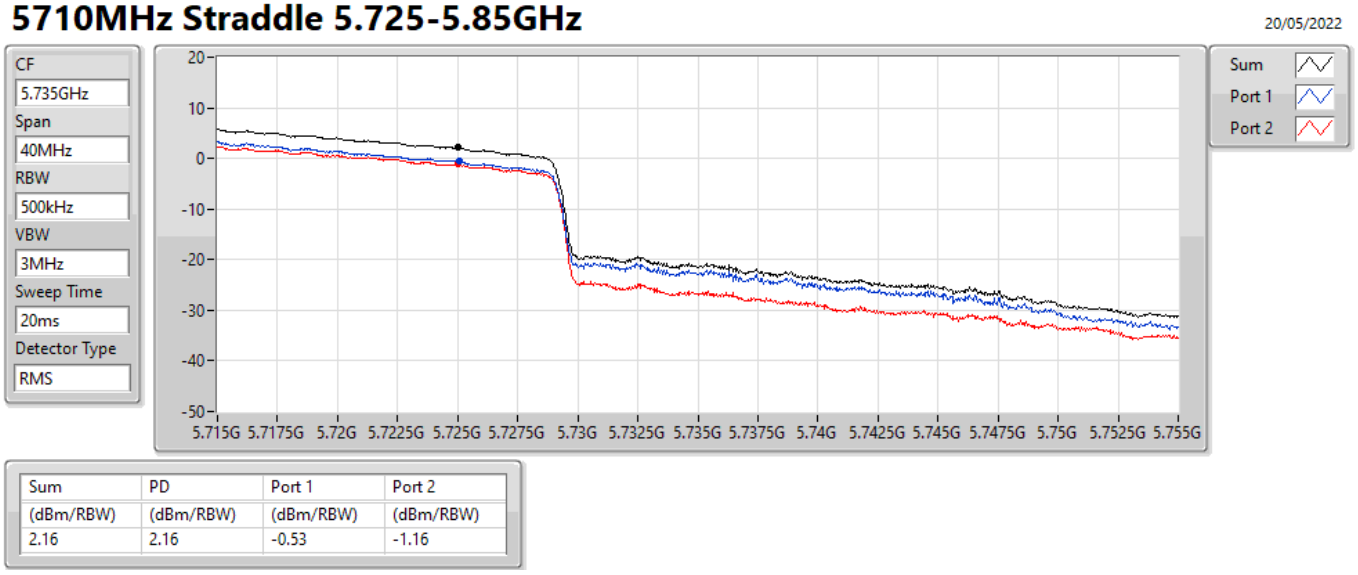

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.16	2.16	-0.53	-1.16

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5755MHz

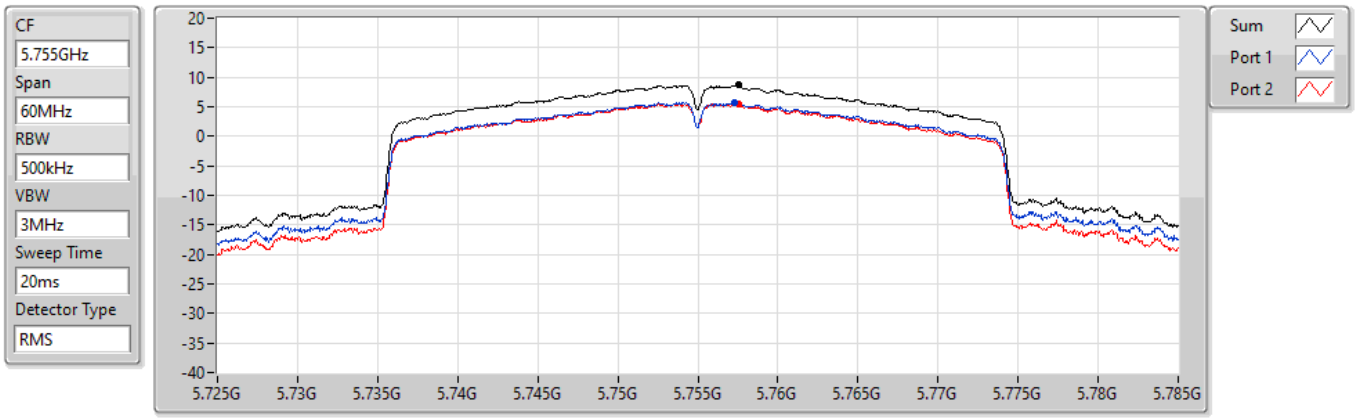

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.65	8.65	5.76	5.57

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5795MHz

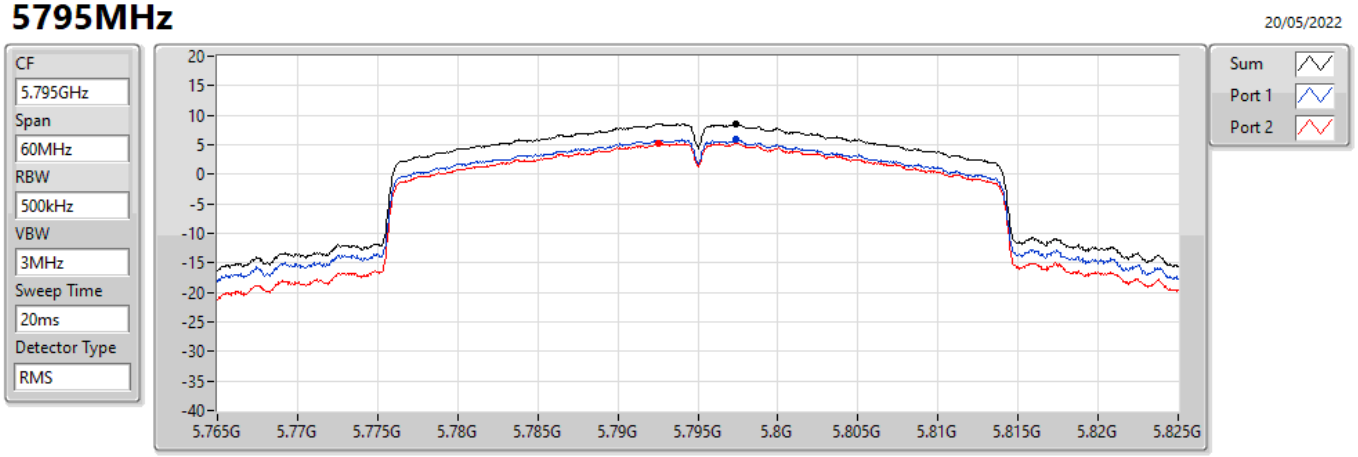

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.55	8.55	5.88	5.24

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5210MHz

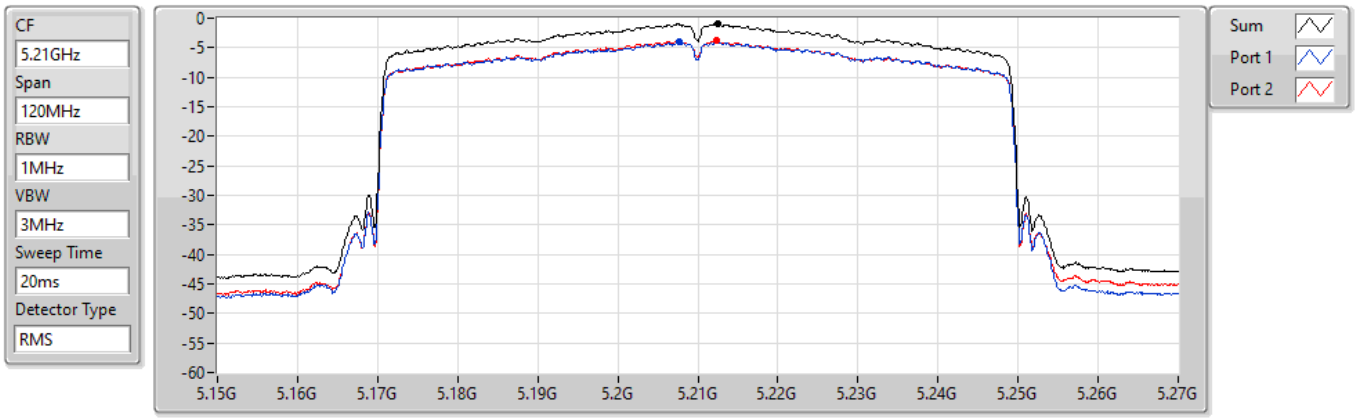

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.93	-0.93	-4.03	-3.75

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5290MHz

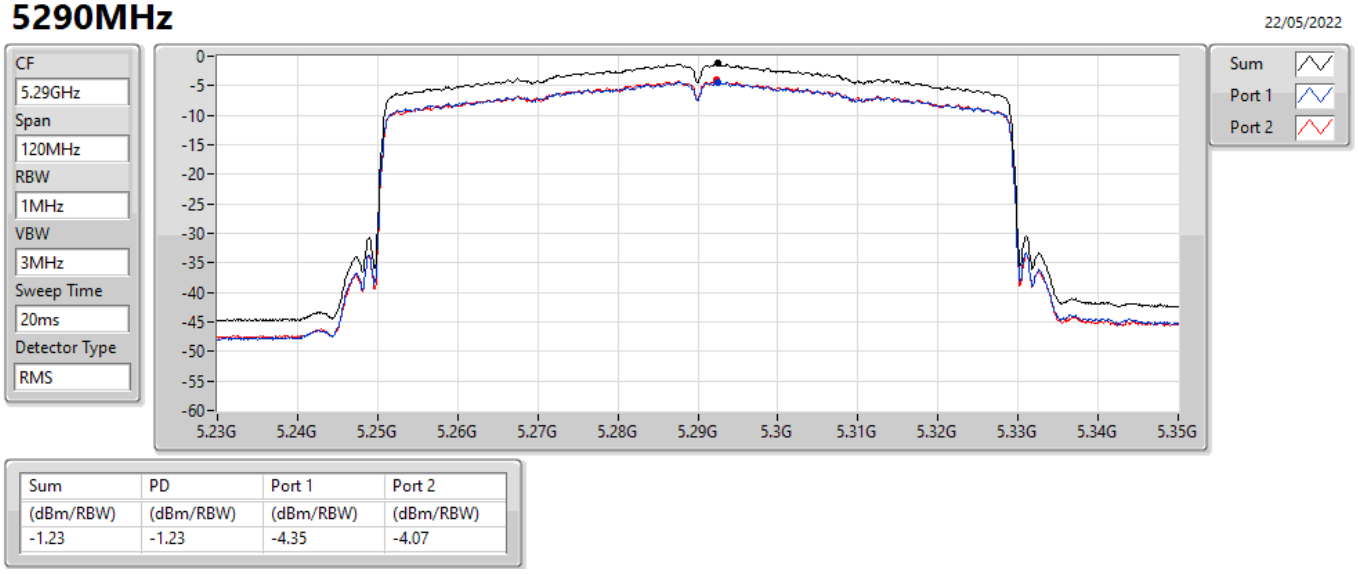

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.23	-1.23	-4.35	-4.07

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5530MHz

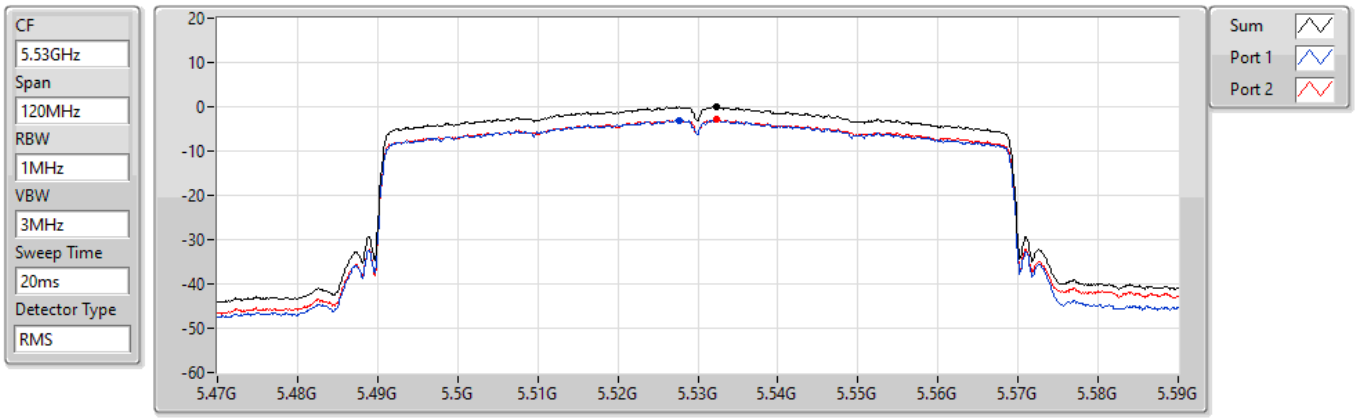

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.01	0.01	-3.03	-2.81

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5610MHz

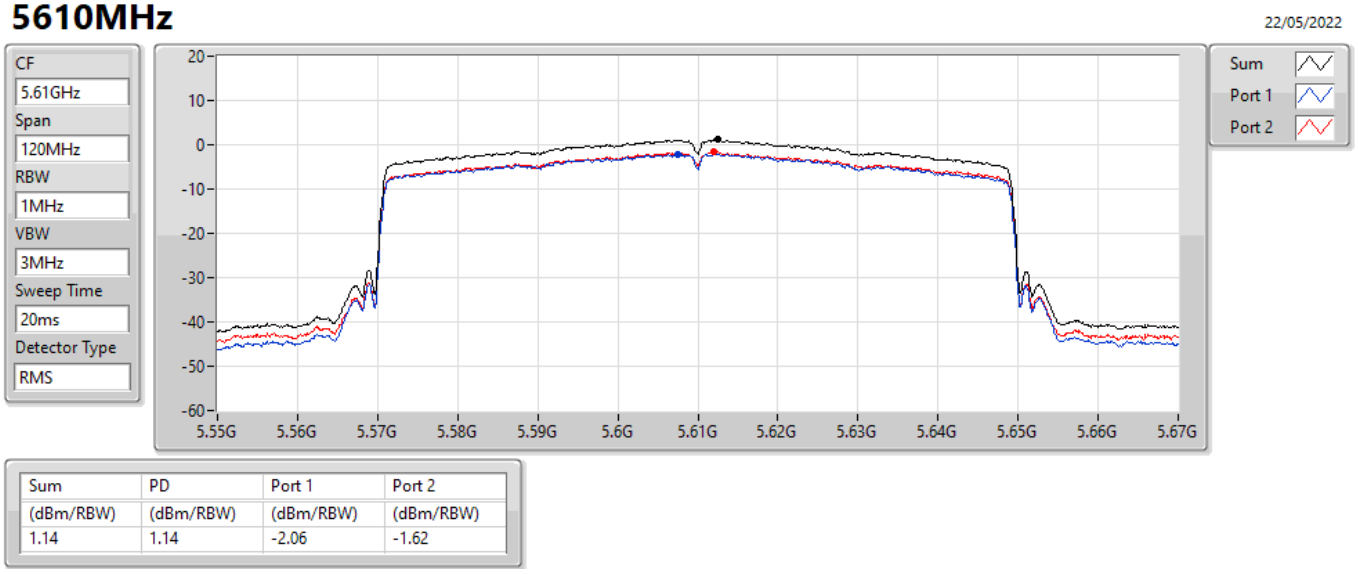

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.14	1.14	-2.06	-1.62

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5690MHz Straddle 5.47-5.725GHz

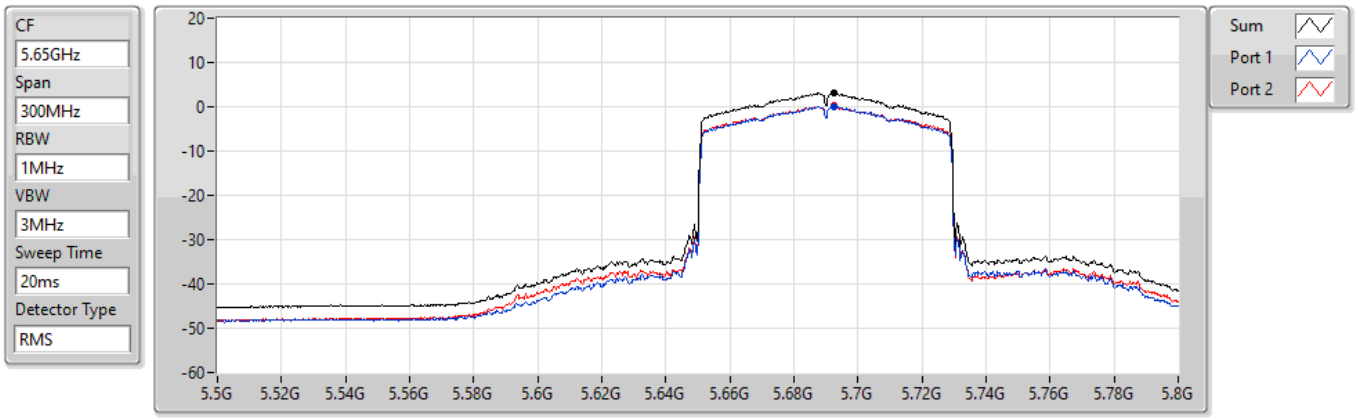

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.12	3.12	0.04	0.18

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5690MHz Straddle 5.725-5.85GHz

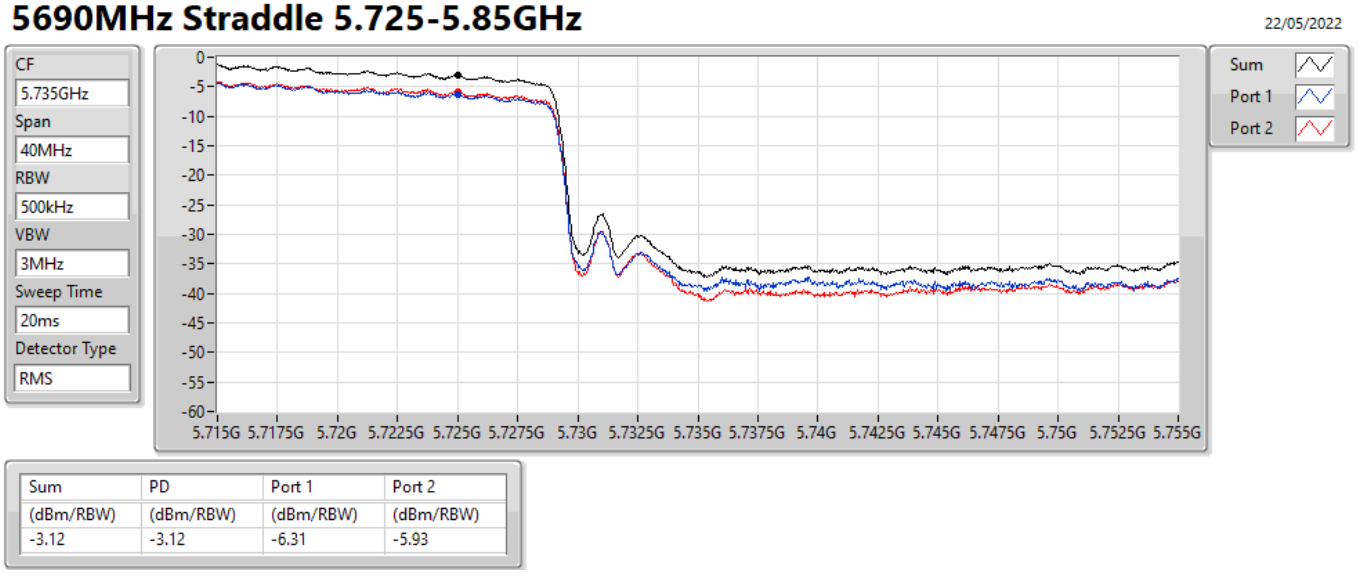

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.12	-3.12	-6.31	-5.93

802.11ax HEW80_Nss1,(MCS0)_2TX PSD

5775MHz

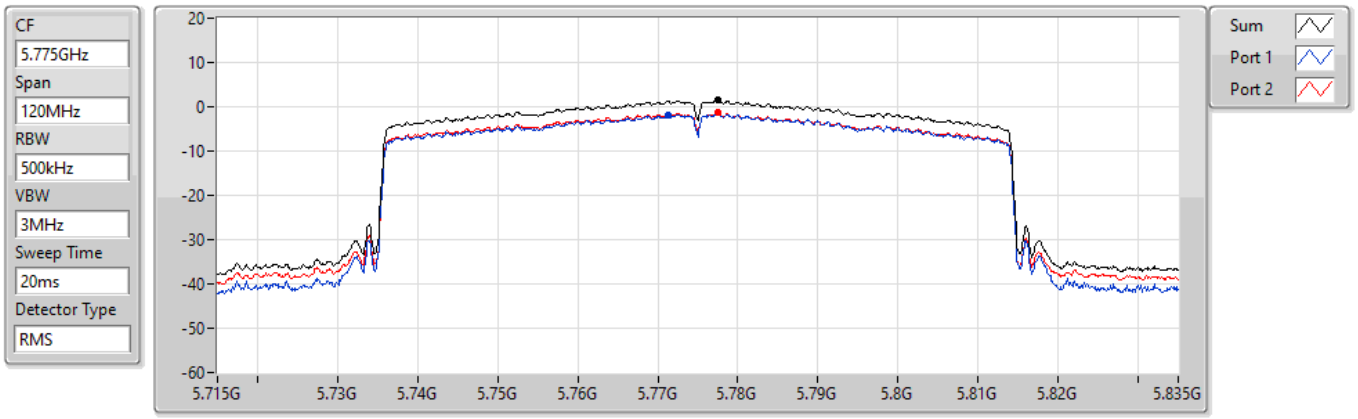


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.41	1.41	-1.78	-1.30

802.11ax HEW160_Nss1,(MCS0)_2TX PSD

5250MHz Straddle 5.15-5.25GHz

22/05/2022

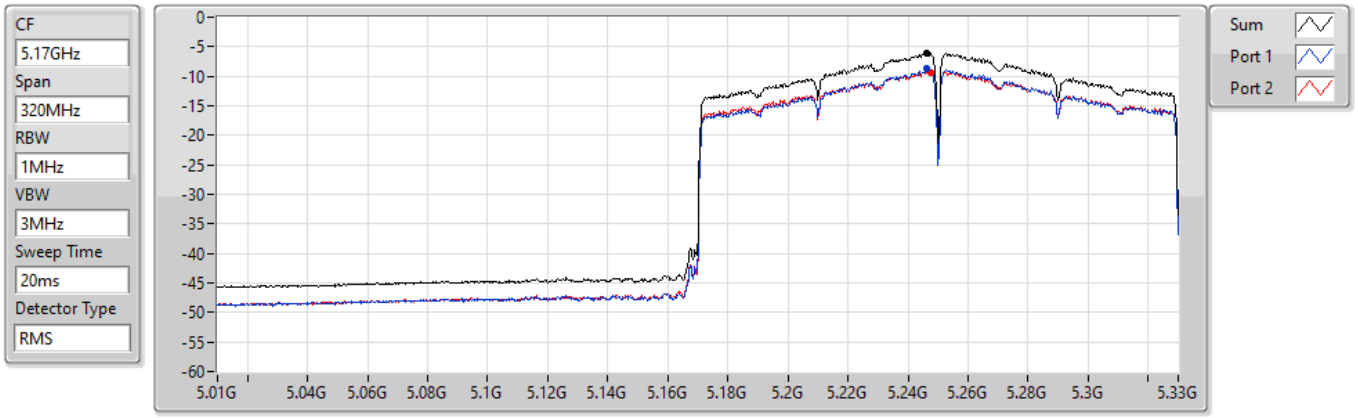


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.08	-6.08	-8.76	-9.28

802.11ax HEW160_Nss1,(MCS0)_2TX PSD

5250MHz Straddle 5.25-5.35GHz


22/05/2022

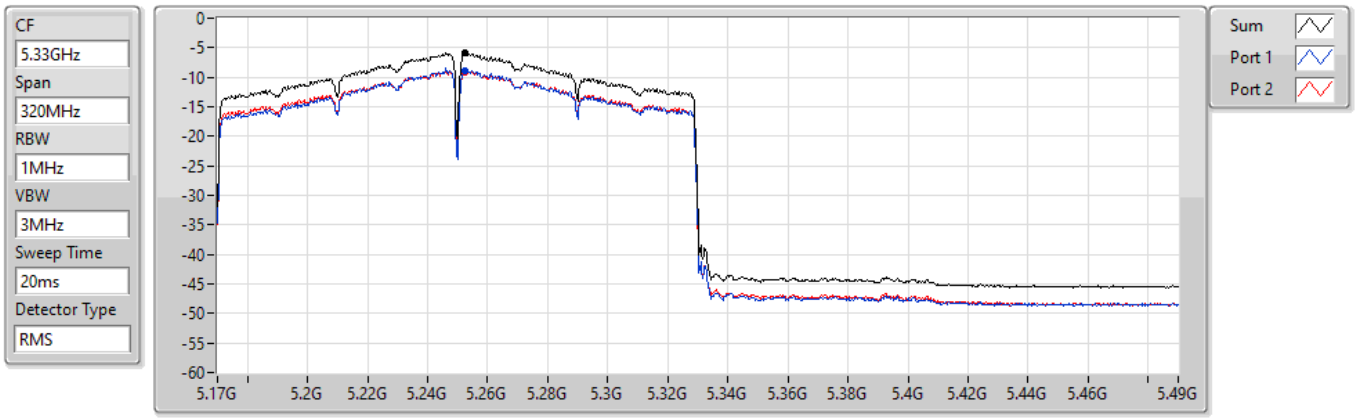

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.96	-5.96	-8.79	-9.14

802.11ax HEW160_Nss1,(MCS0)_2TX **PSD**

5570MHz

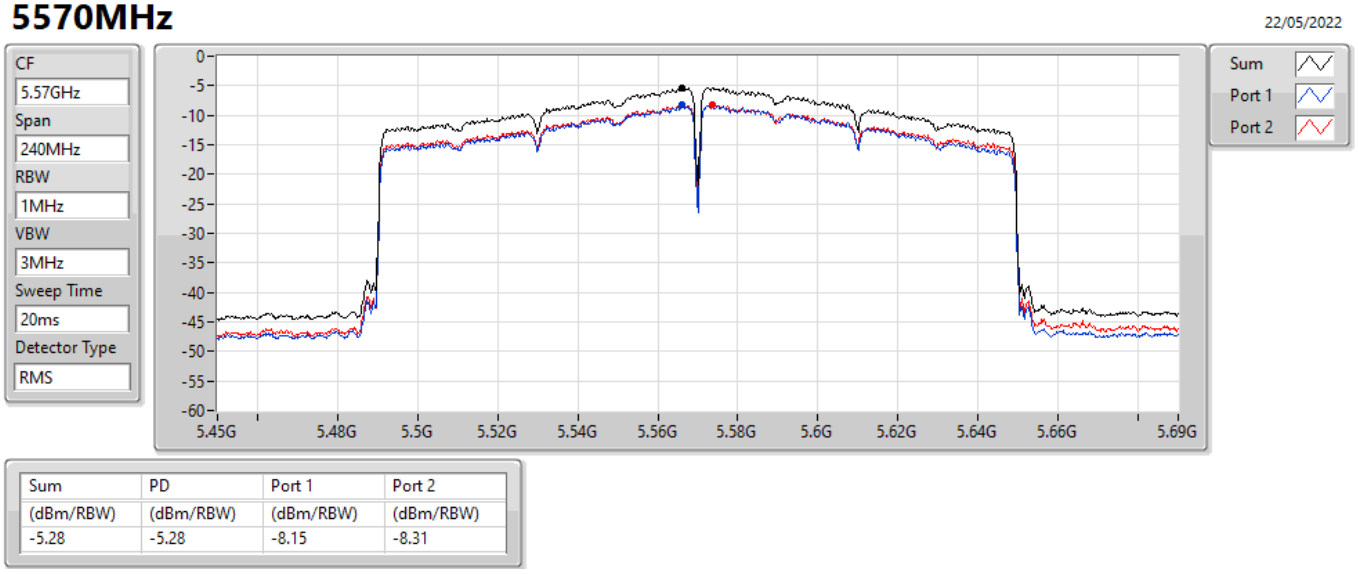

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.28	-5.28	-8.15	-8.31

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_2TX	8.89
802.11ax HEW20_Nss1,(MCS0)_2TX	8.87
802.11ax HEW40_Nss1,(MCS0)_2TX	8.82
802.11ax HEW80_Nss1,(MCS0)_2TX	0.30
802.11ax HEW160_Nss1,(MCS0)_2TX	-5.75
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_2TX	8.97
802.11ax HEW20_Nss1,(MCS0)_2TX	8.86
802.11ax HEW40_Nss1,(MCS0)_2TX	8.63
802.11ax HEW80_Nss1,(MCS0)_2TX	-1.80
802.11ax HEW160_Nss1,(MCS0)_2TX	-5.66
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_2TX	8.93
802.11ax HEW20_Nss1,(MCS0)_2TX	8.97
802.11ax HEW40_Nss1,(MCS0)_2TX	8.50
802.11ax HEW80_Nss1,(MCS0)_2TX	6.09
802.11ax HEW160_Nss1,(MCS0)_2TX	-5.02
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_2TX	11.82
802.11ax HEW20_Nss1,(MCS0)_2TX	11.25
802.11ax HEW40_Nss1,(MCS0)_2TX	8.65
802.11ax HEW80_Nss1,(MCS0)_2TX	2.63

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	8.01	5.68	5.96	8.80	8.99
5200MHz	Pass	8.01	5.82	6.01	8.89	8.99
5240MHz	Pass	8.01	5.60	5.78	8.70	8.99
5260MHz	Pass	8.01	5.86	6.13	8.97	8.99
5300MHz	Pass	8.01	5.94	5.66	8.80	8.99
5320MHz	Pass	8.01	5.92	5.85	8.89	8.99
5500MHz	Pass	8.01	5.79	5.99	8.86	8.99
5580MHz	Pass	8.01	5.73	6.07	8.91	8.99
5700MHz	Pass	8.01	5.22	5.11	8.17	8.99
5720MHz Straddle 5.47-5.725GHz	Pass	8.01	5.73	6.10	8.93	8.99
5720MHz Straddle 5.725-5.85GHz	Pass	8.01	1.67	2.29	5.00	27.99
5745MHz	Pass	8.01	8.18	8.07	11.12	27.99
5785MHz	Pass	8.01	8.72	9.00	11.82	27.99
5825MHz	Pass	8.01	8.54	7.61	11.09	27.99
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	8.01	5.67	5.89	8.79	8.99
5200MHz	Pass	8.01	5.75	5.98	8.87	8.99
5240MHz	Pass	8.01	5.77	5.96	8.84	8.99
5260MHz	Pass	8.01	5.67	6.00	8.82	8.99
5300MHz	Pass	8.01	5.75	5.74	8.75	8.99
5320MHz	Pass	8.01	5.87	5.88	8.86	8.99
5500MHz	Pass	8.01	5.83	5.96	8.89	8.99
5580MHz	Pass	8.01	5.74	6.11	8.93	8.99
5700MHz	Pass	8.01	3.26	3.35	6.27	8.99
5720MHz Straddle 5.47-5.725GHz	Pass	8.01	5.82	6.15	8.97	8.99
5720MHz Straddle 5.725-5.85GHz	Pass	8.01	1.57	1.97	4.77	27.99
5745MHz	Pass	8.01	8.25	8.34	11.25	27.99
5785MHz	Pass	8.01	8.29	8.23	11.24	27.99
5825MHz	Pass	8.01	8.25	7.29	10.74	27.99
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	8.01	2.50	2.50	5.44	8.99
5230MHz	Pass	8.01	6.02	5.60	8.82	8.99
5270MHz	Pass	8.01	5.58	5.72	8.63	8.99
5310MHz	Pass	8.01	0.84	1.16	3.98	8.99
5510MHz	Pass	8.01	1.94	2.35	5.08	8.99
5550MHz	Pass	8.01	5.99	4.93	8.50	8.99
5670MHz	Pass	8.01	2.49	2.57	5.52	8.99
5710MHz Straddle 5.47-5.725GHz	Pass	8.01	5.50	4.90	8.20	8.99
5710MHz Straddle 5.725-5.85GHz	Pass	8.01	-0.53	-1.16	2.16	27.99
5755MHz	Pass	8.01	5.76	5.57	8.65	27.99
5795MHz	Pass	8.01	5.88	5.24	8.55	27.99
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	8.01	-2.85	-2.43	0.30	8.99
5290MHz	Pass	8.01	-4.95	-4.63	-1.80	8.99
5530MHz	Pass	8.01	-2.12	-1.72	1.04	8.99
5610MHz	Pass	8.01	-1.64	-1.25	1.52	8.99
5690MHz Straddle 5.47-5.725GHz	Pass	8.01	3.28	2.86	6.09	8.99
5690MHz Straddle 5.725-5.85GHz	Pass	8.01	-3.09	-3.58	-0.38	27.99
5775MHz	Pass	8.01	-0.51	-0.18	2.63	27.99
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
5250MHz Straddle 5.15-5.25GHz	Pass	8.01	-8.52	-8.95	-5.75	8.99
5250MHz Straddle 5.25-5.35GHz	Pass	8.01	-8.65	-8.70	-5.66	8.99
5570MHz	Pass	8.01	-7.99	-8.01	-5.02	8.99

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11a_Nss1,(6Mbps)_2TX PSD


5180MHz

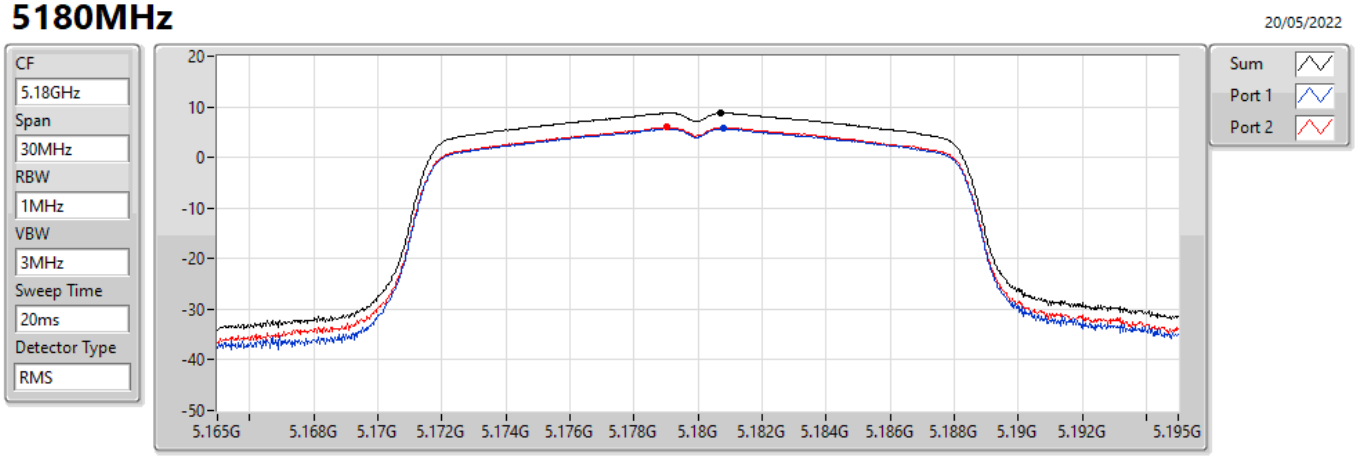

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.80	8.80	5.68	5.96

802.11a_Nss1,(6Mbps)_2TX PSD


5200MHz

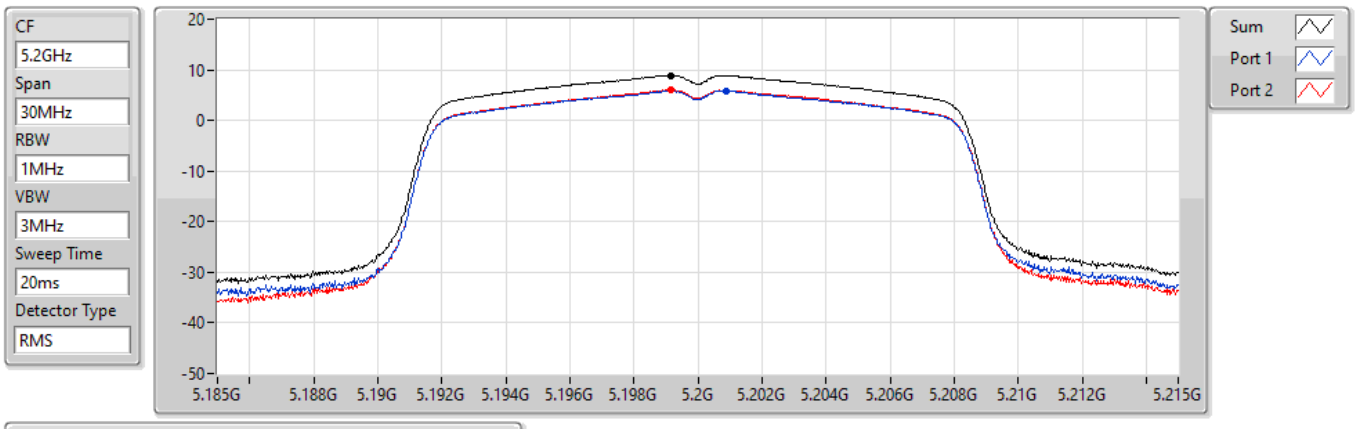

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.89	8.89	5.82	6.01

802.11a_Nss1,(6Mbps)_2TX PSD


5240MHz

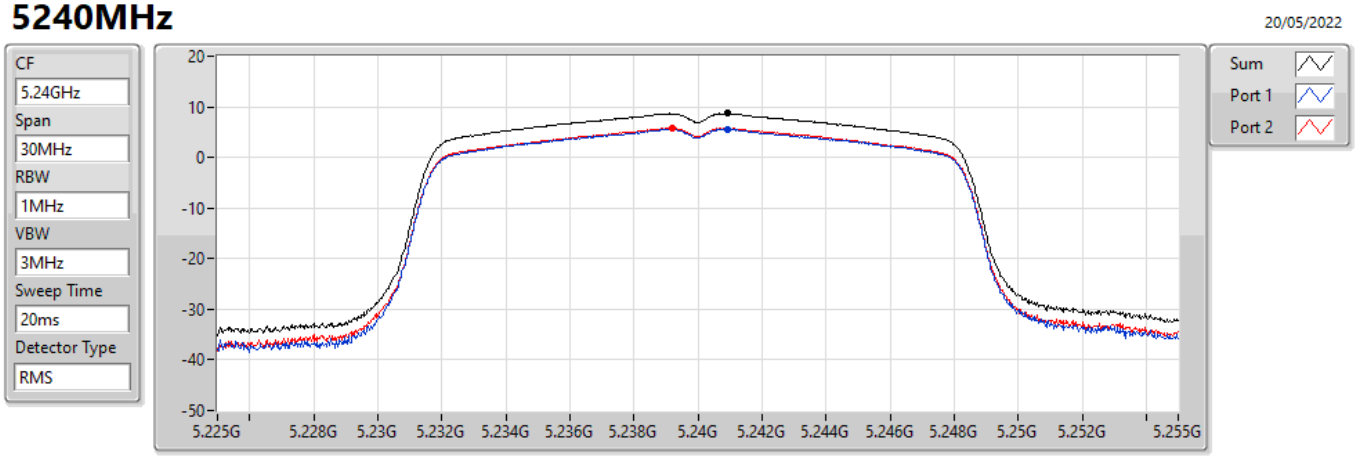

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.70	8.70	5.60	5.78

802.11a_Nss1,(6Mbps)_2TX PSD


5260MHz

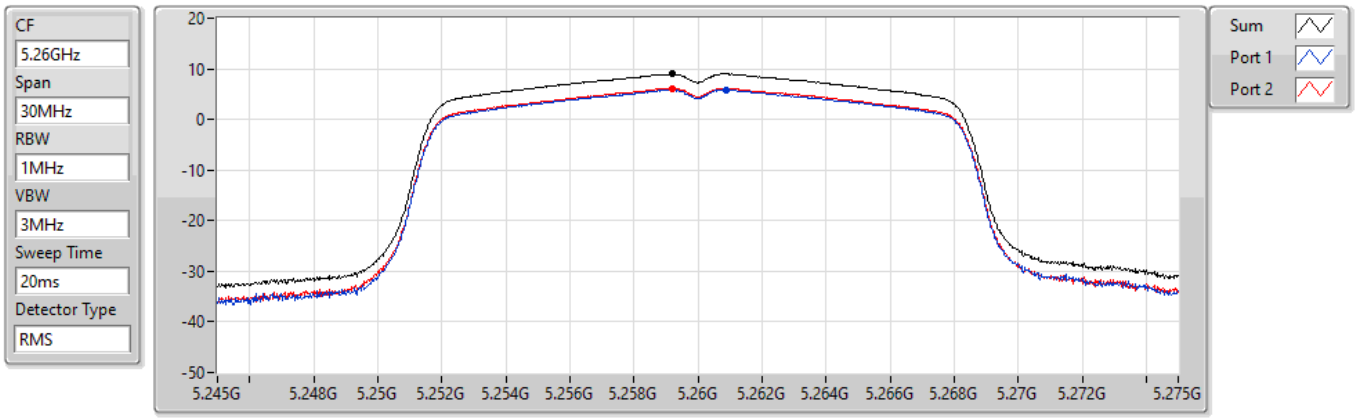

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.97	8.97	5.86	6.13

802.11a_Nss1,(6Mbps)_2TX PSD


5300MHz

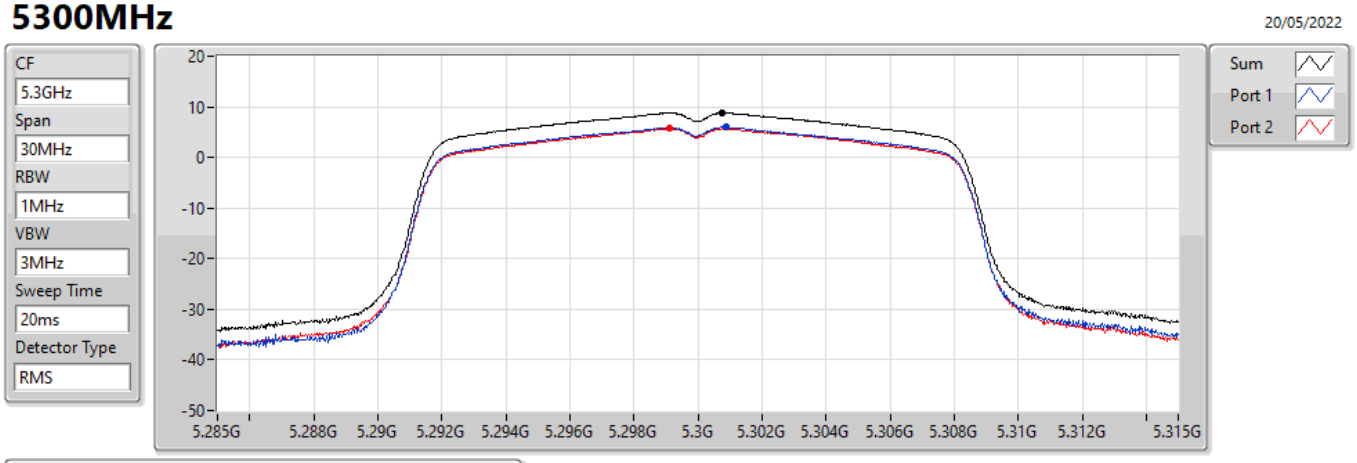

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.80	8.80	5.94	5.66

802.11a_Nss1,(6Mbps)_2TX PSD


5320MHz

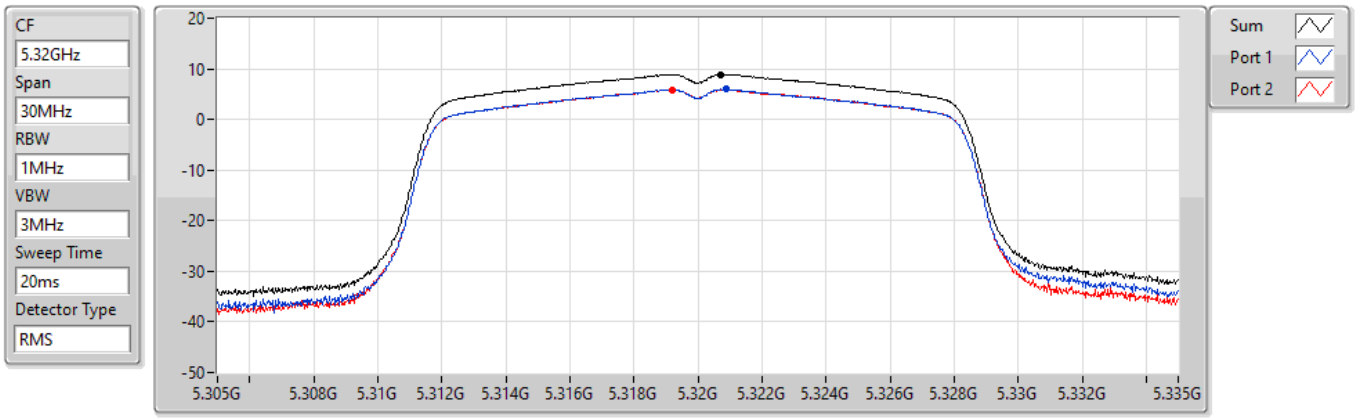

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.89	8.89	5.92	5.85

802.11a_Nss1,(6Mbps)_2TX PSD


5500MHz

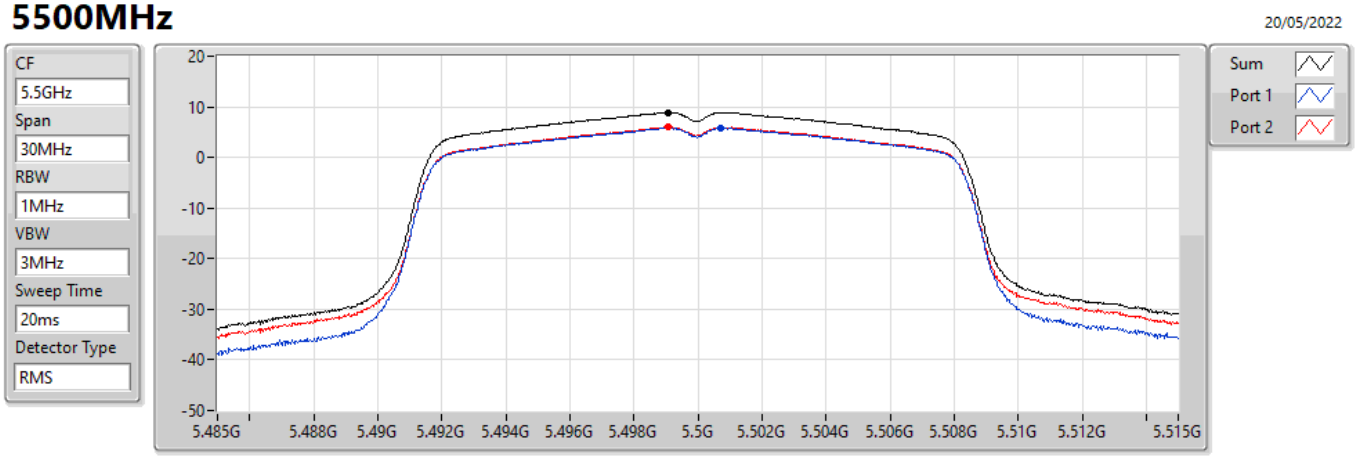

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.86	8.86	5.79	5.99

802.11a_Nss1,(6Mbps)_2TX PSD


5580MHz

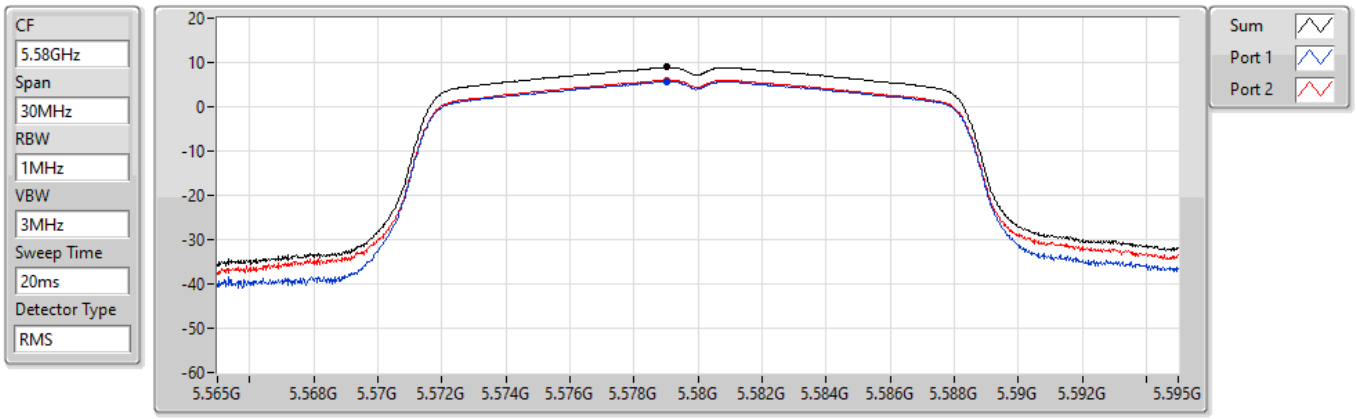

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.91	8.91	5.73	6.07

802.11a_Nss1,(6Mbps)_2TX PSD


5700MHz

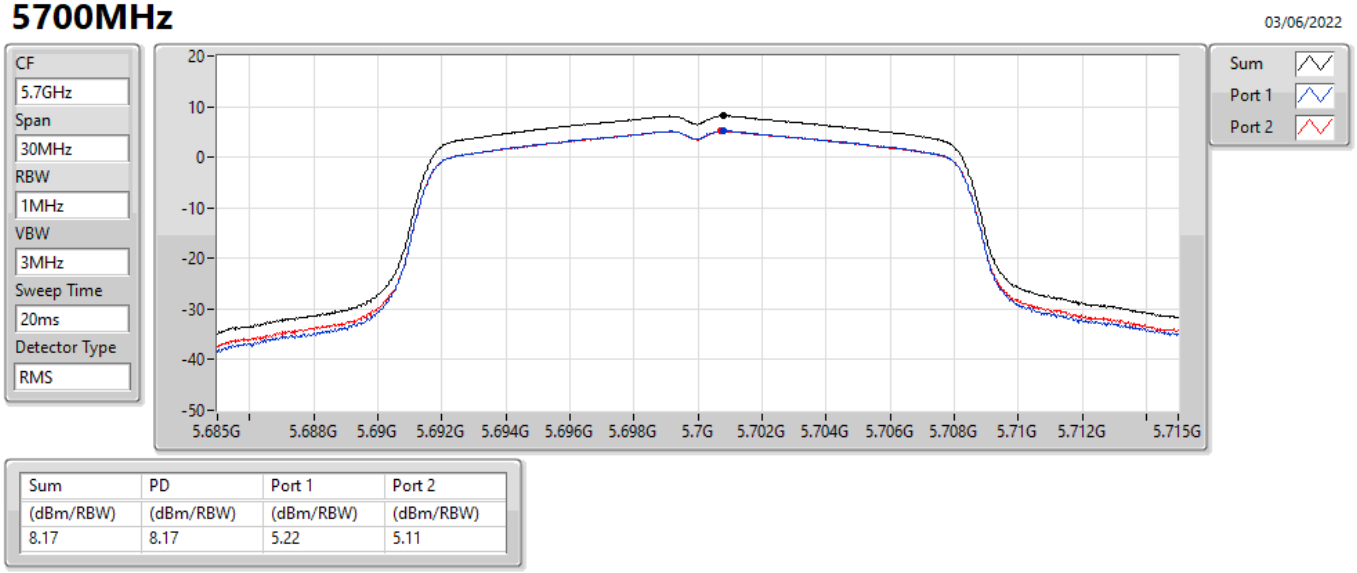

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.17	8.17	5.22	5.11

802.11a_Nss1,(6Mbps)_2TX PSD


5720MHz Straddle 5.47-5.725GHz

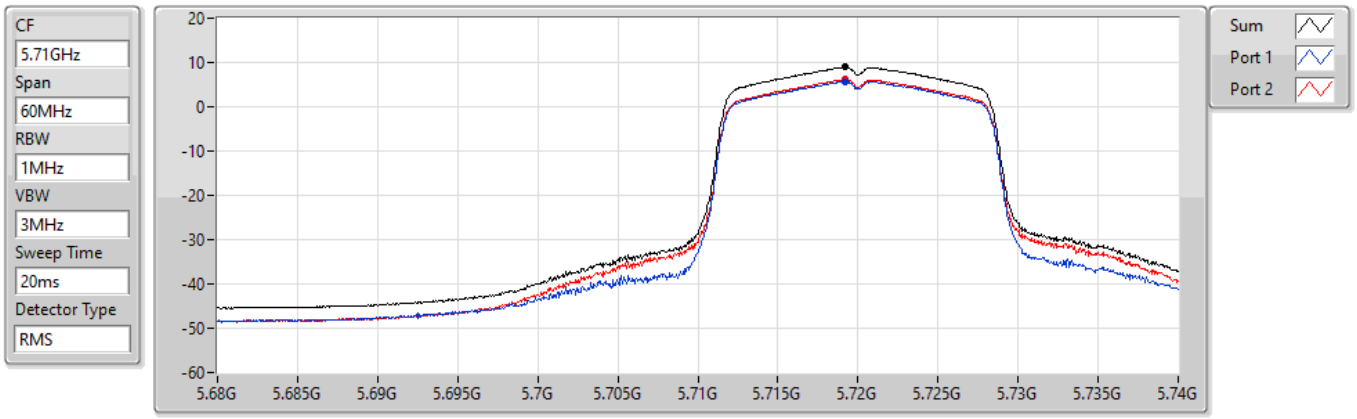

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.93	8.93	5.73	6.10

802.11a_Nss1,(6Mbps)_2TX **PSD**


5720MHz Straddle 5.725-5.85GHz

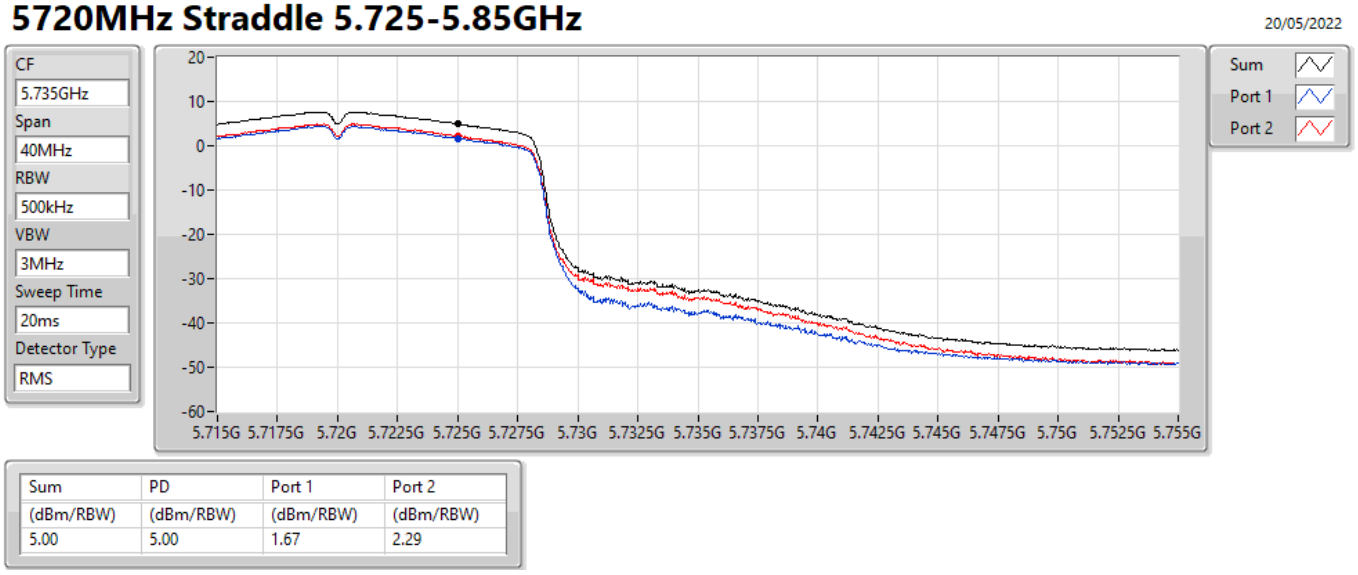

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.00	5.00	1.67	2.29

802.11a_Nss1,(6Mbps)_2TX **PSD**


5745MHz

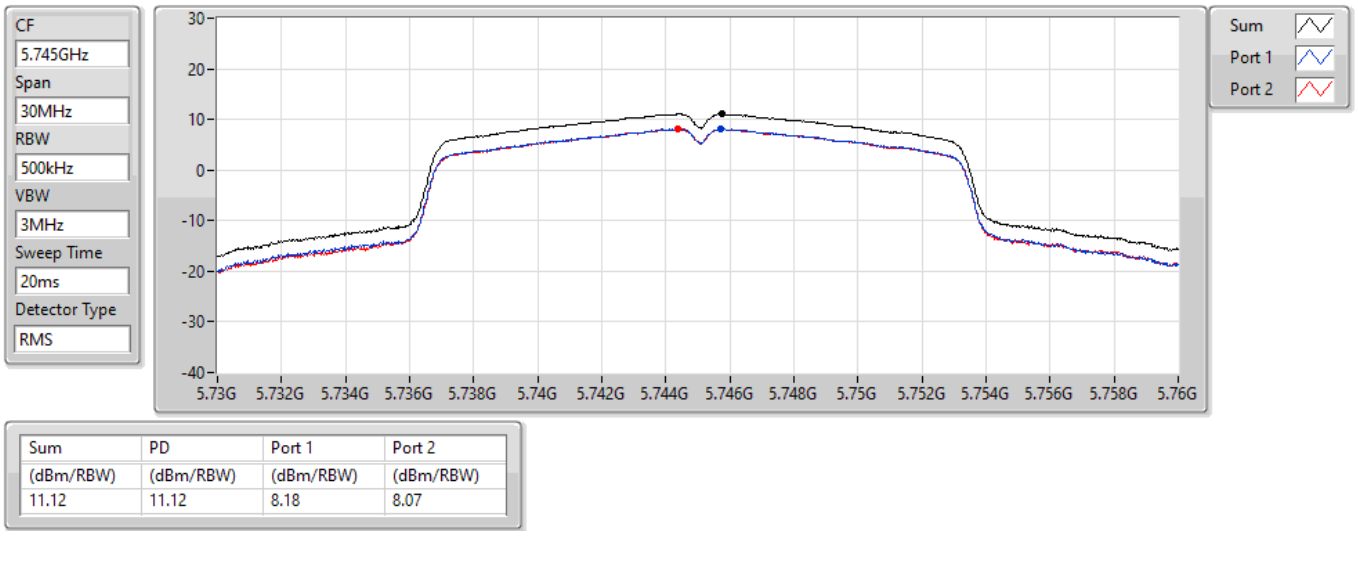

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.12	11.12	8.18	8.07

802.11a_Nss1,(6Mbps)_2TX PSD


5785MHz

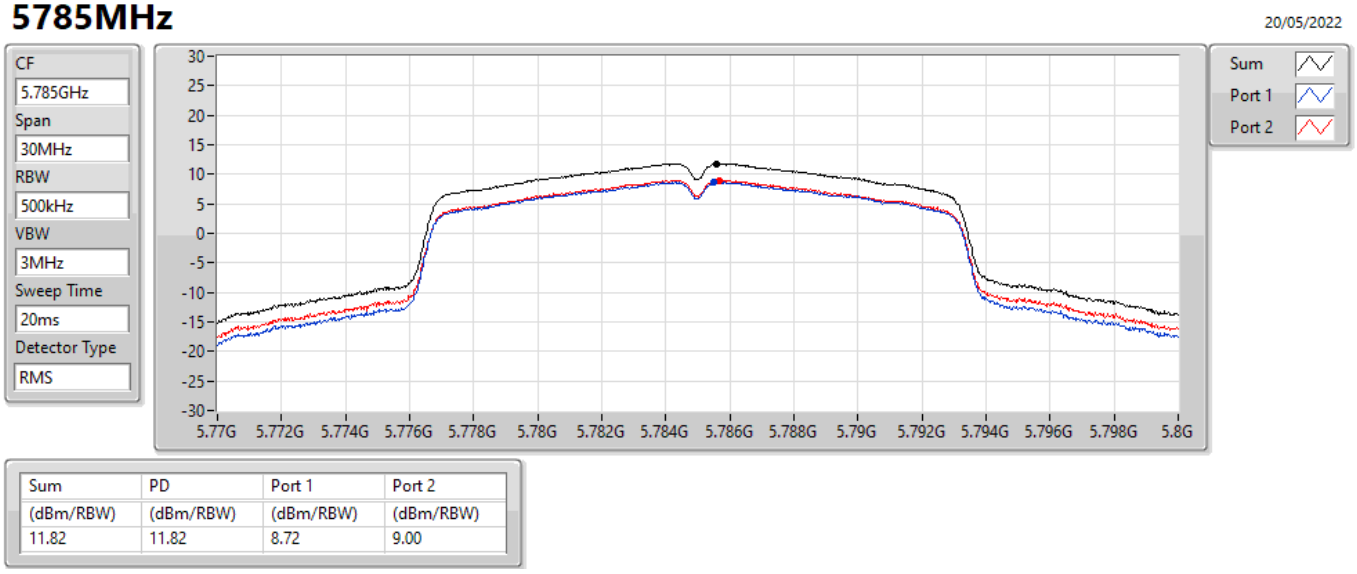

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.82	11.82	8.72	9.00

802.11a_Nss1,(6Mbps)_2TX PSD


5825MHz

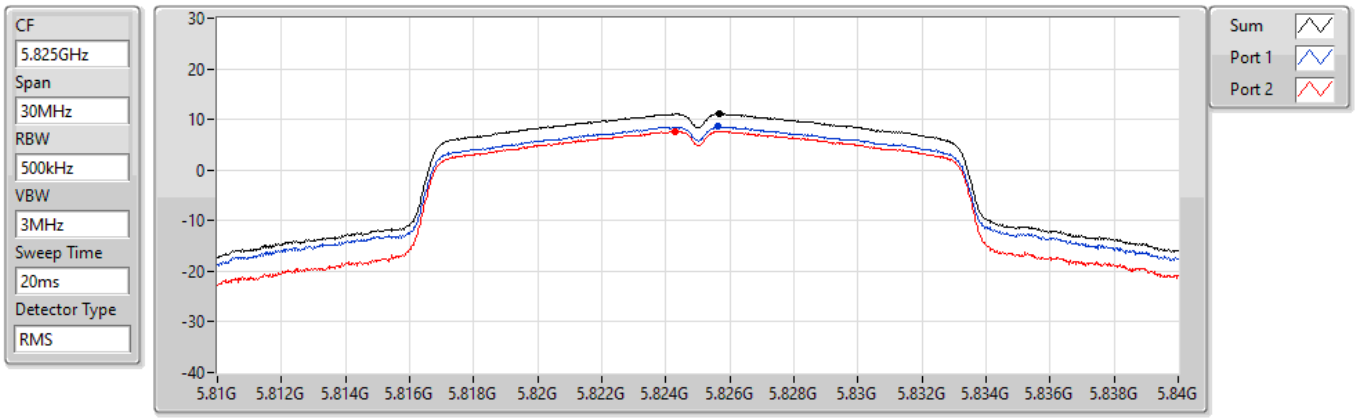

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.09	11.09	8.54	7.61

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5180MHz

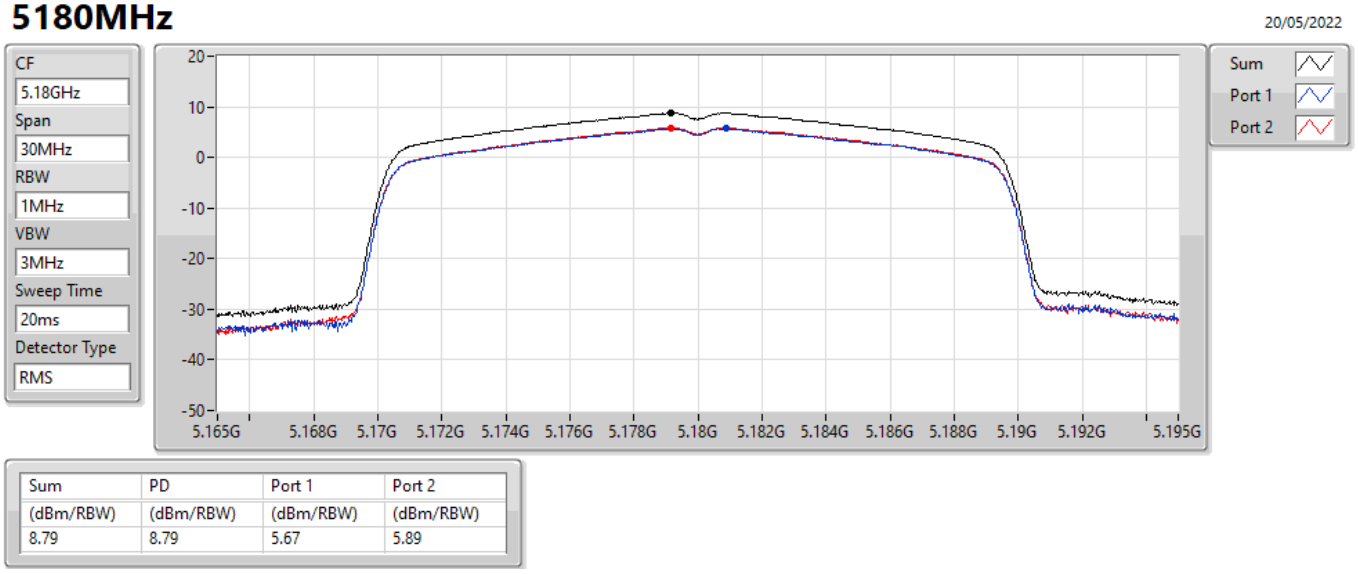

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.79	8.79	5.67	5.89

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5200MHz

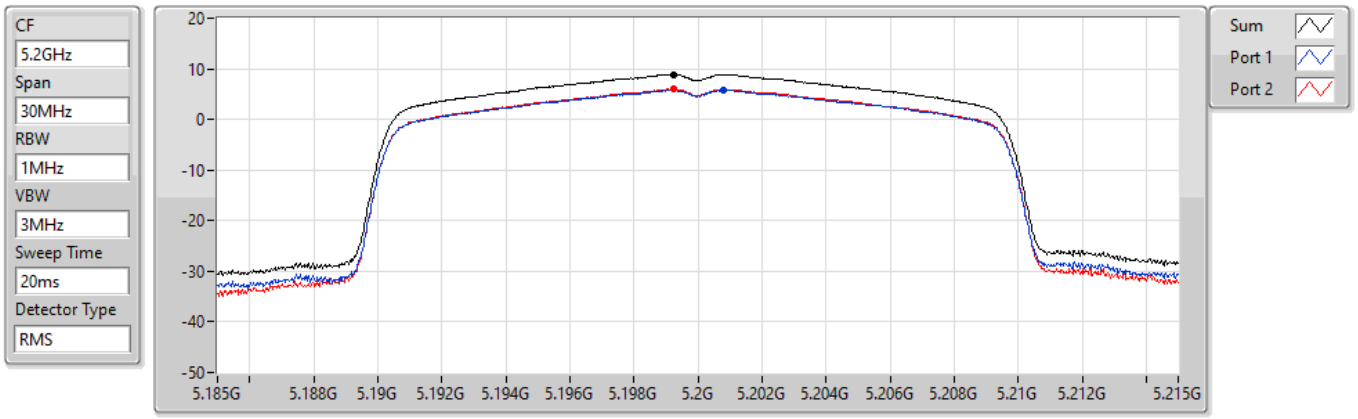

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.87	8.87	5.75	5.98

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5240MHz

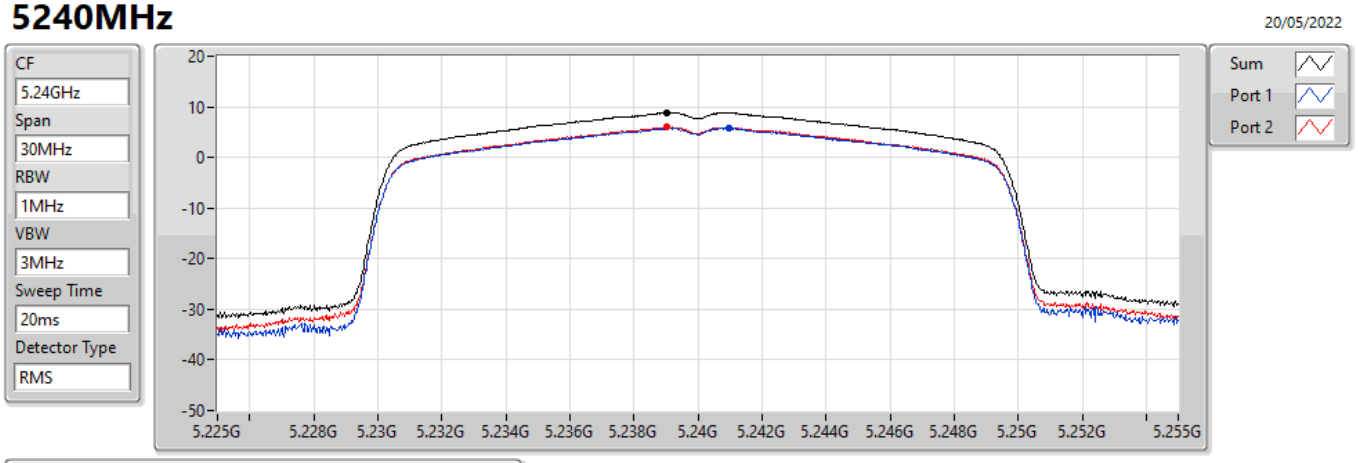

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.84	8.84	5.77	5.96

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5260MHz

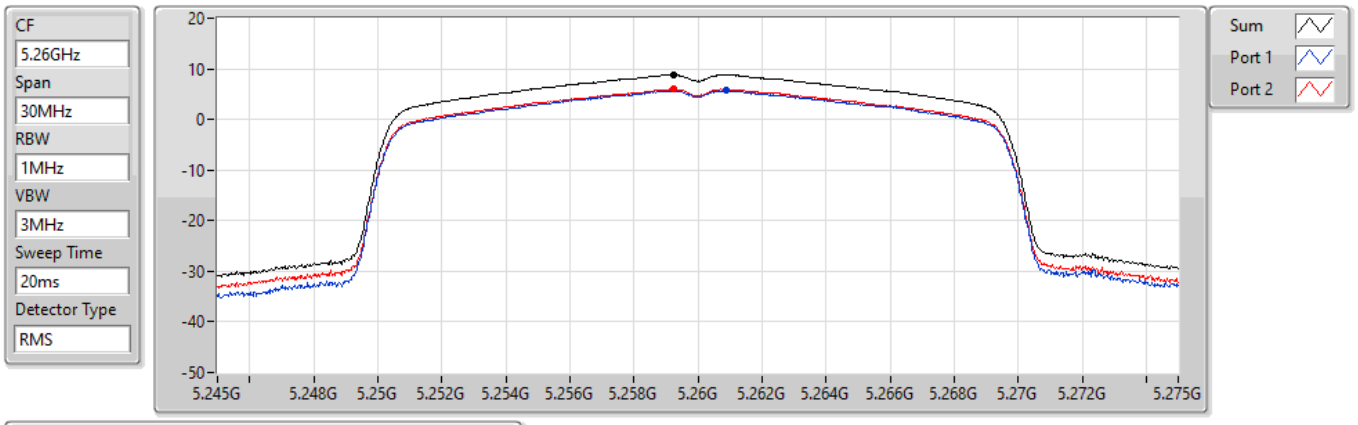

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.82	8.82	5.67	6.00

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5300MHz

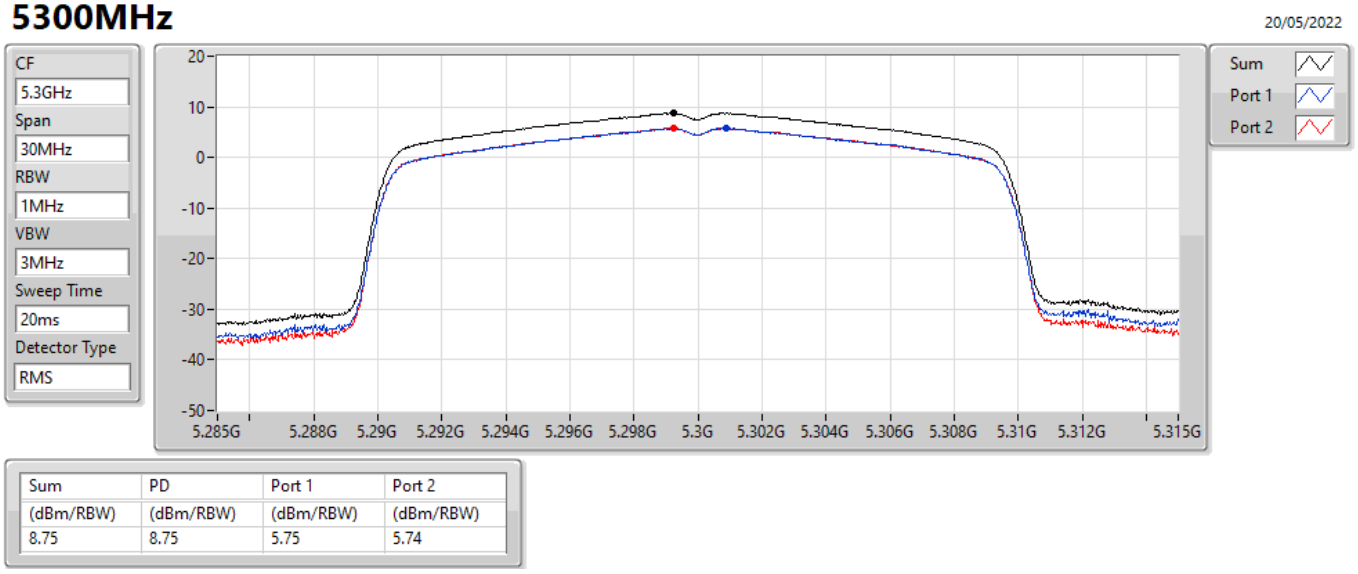

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.75	8.75	5.75	5.74

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5320MHz

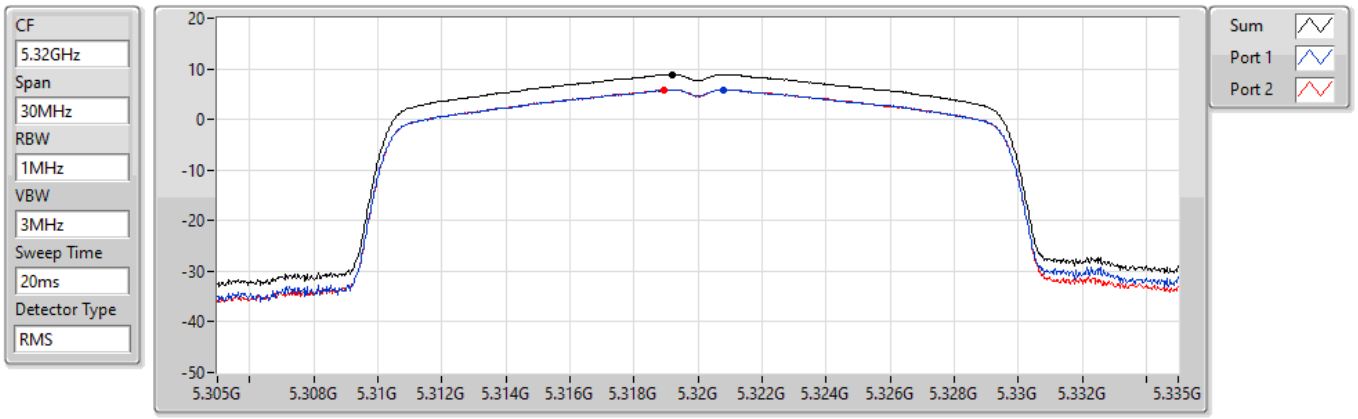

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.86	8.86	5.87	5.88

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5500MHz

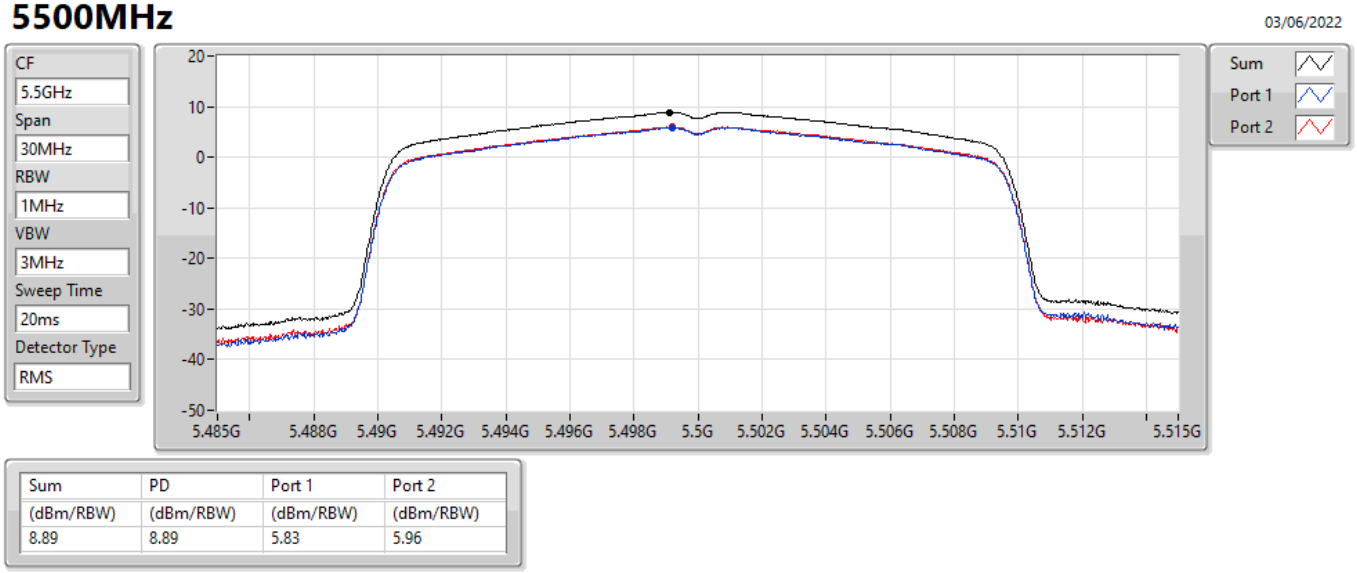

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.89	8.89	5.83	5.96

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5580MHz

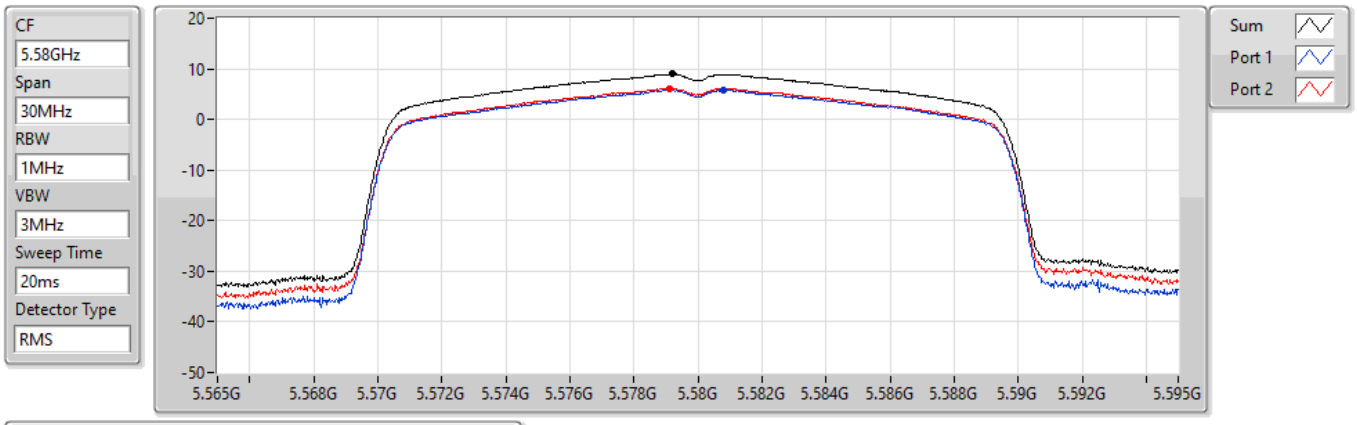


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.93	8.93	5.74	6.11

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5700MHz

03/06/2022

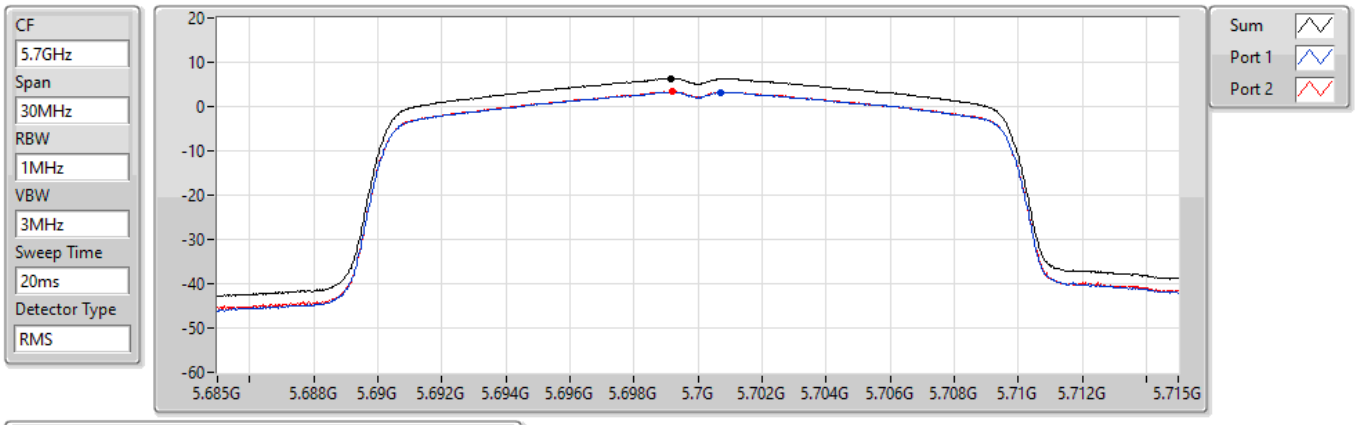


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.27	6.27	3.26	3.35

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5720MHz Straddle 5.47-5.725GHz


20/05/2022

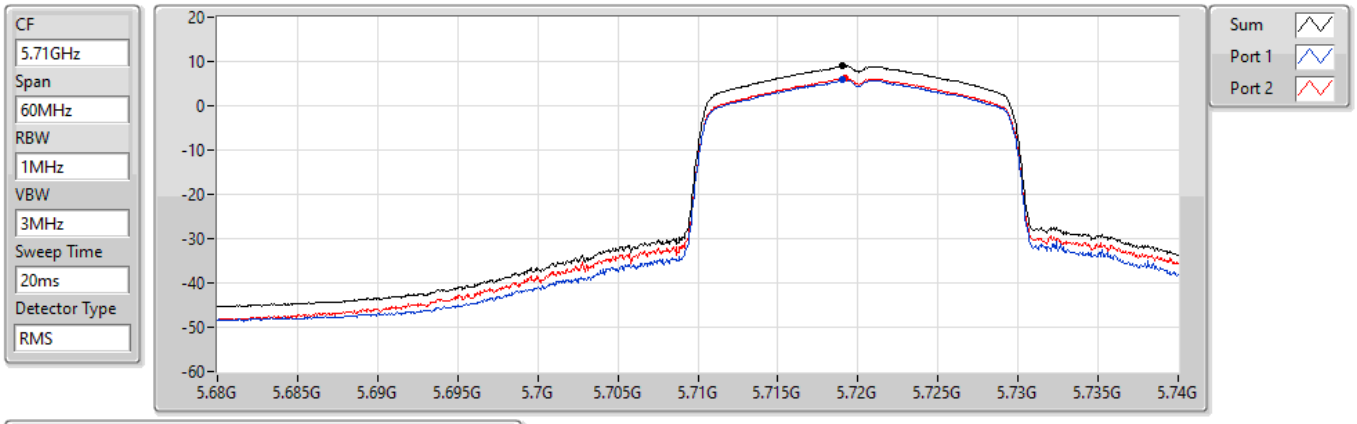

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.97	8.97	5.82	6.15

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.725-5.85GHz

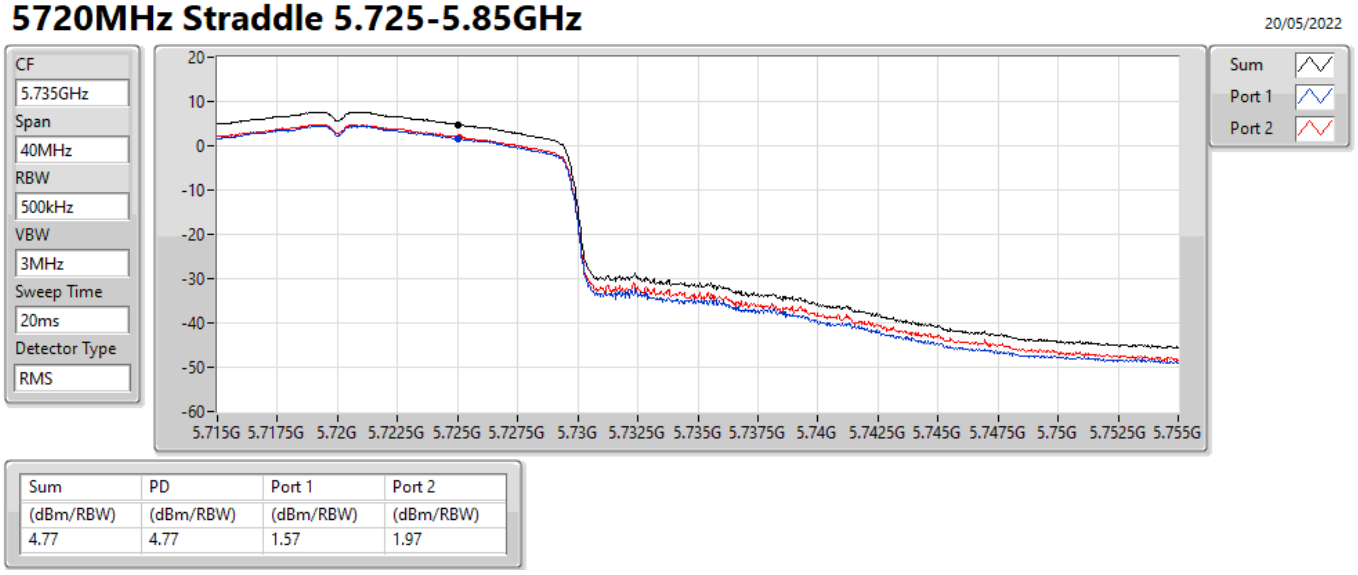

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.77	4.77	1.57	1.97

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5745MHz

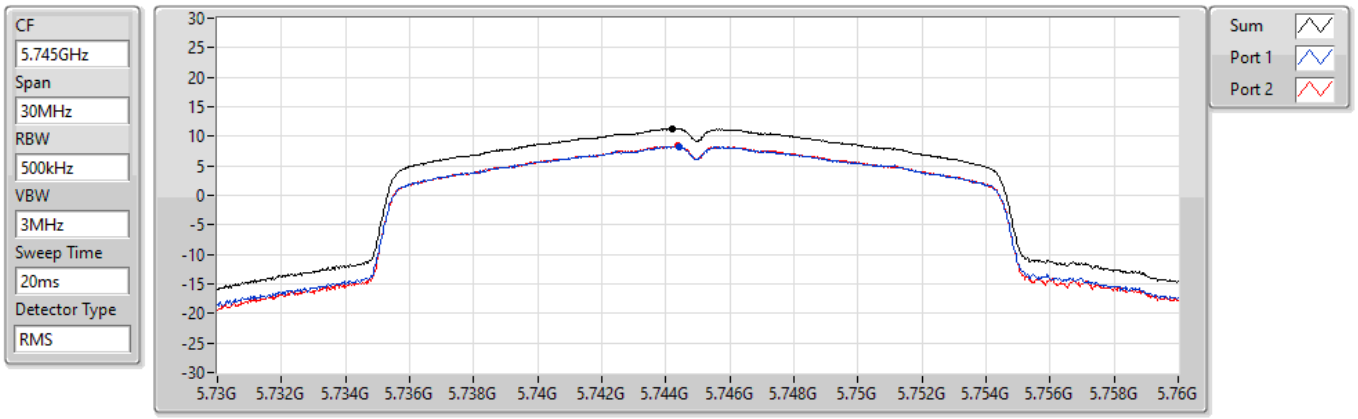

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.25	11.25	8.25	8.34

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5785MHz

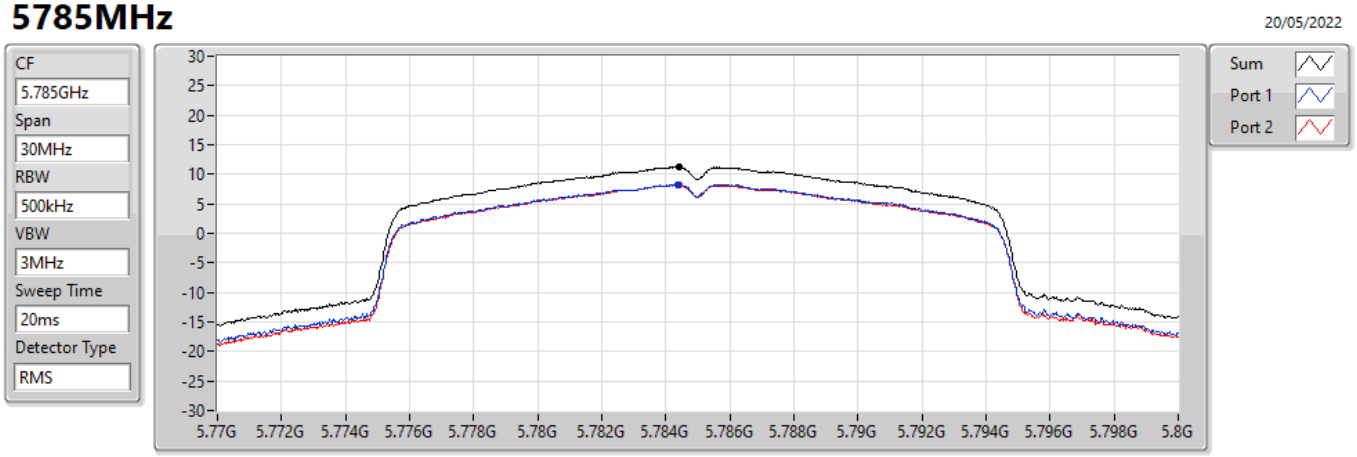

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.24	11.24	8.29	8.23

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5825MHz

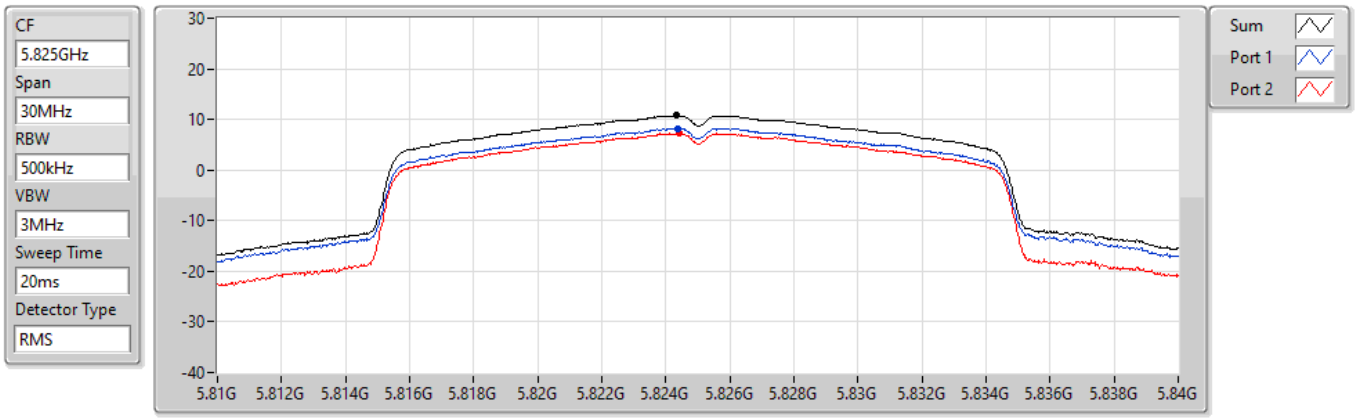

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.74	10.74	8.25	7.29

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5190MHz

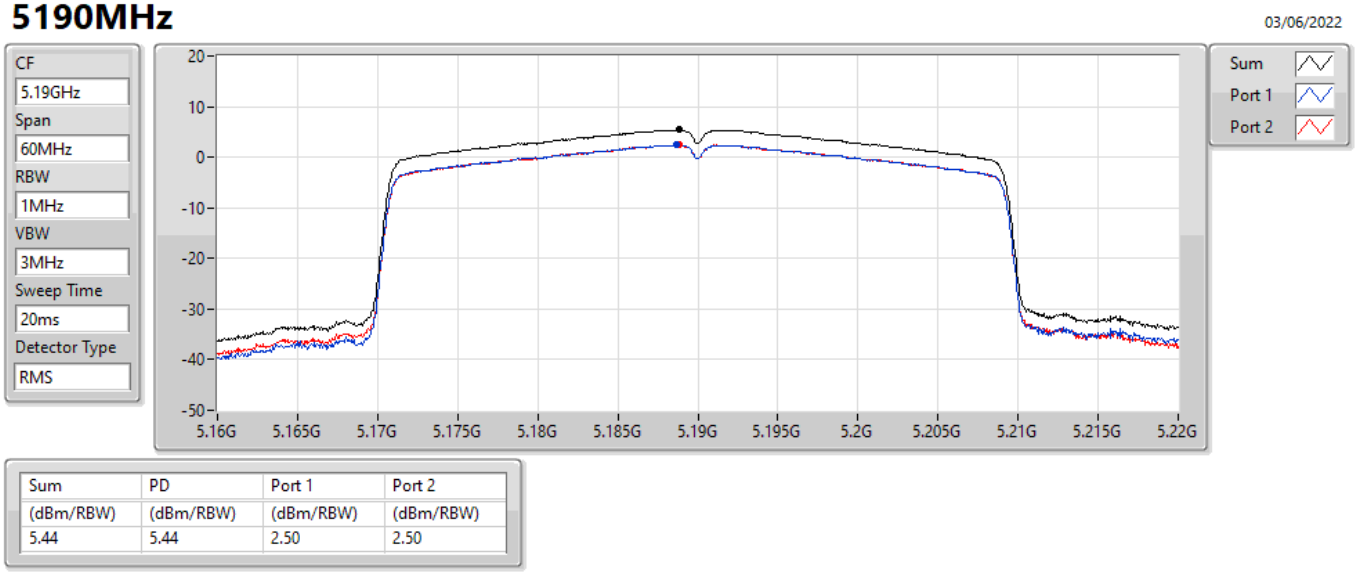

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.44	5.44	2.50	2.50

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5230MHz

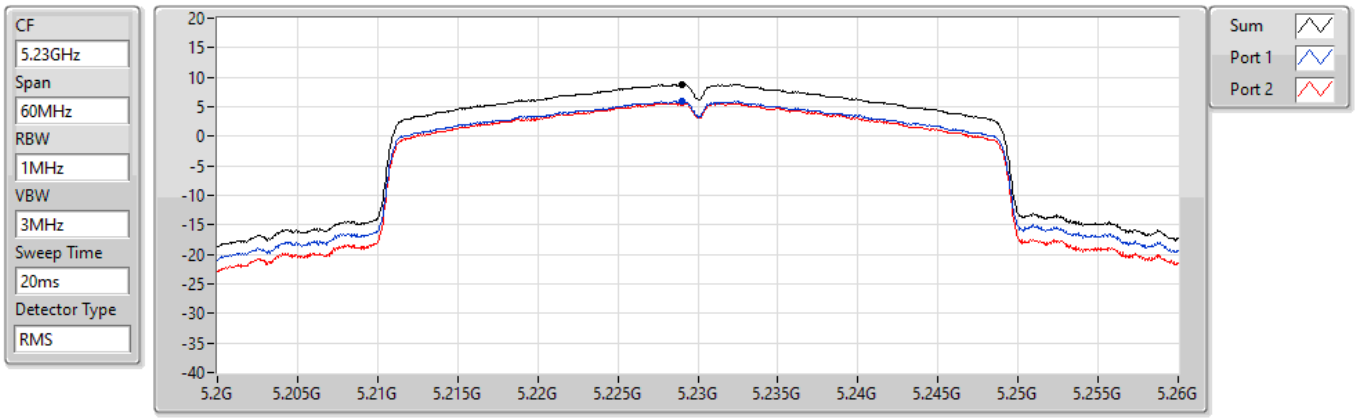

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.82	8.82	6.02	5.60

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5270MHz

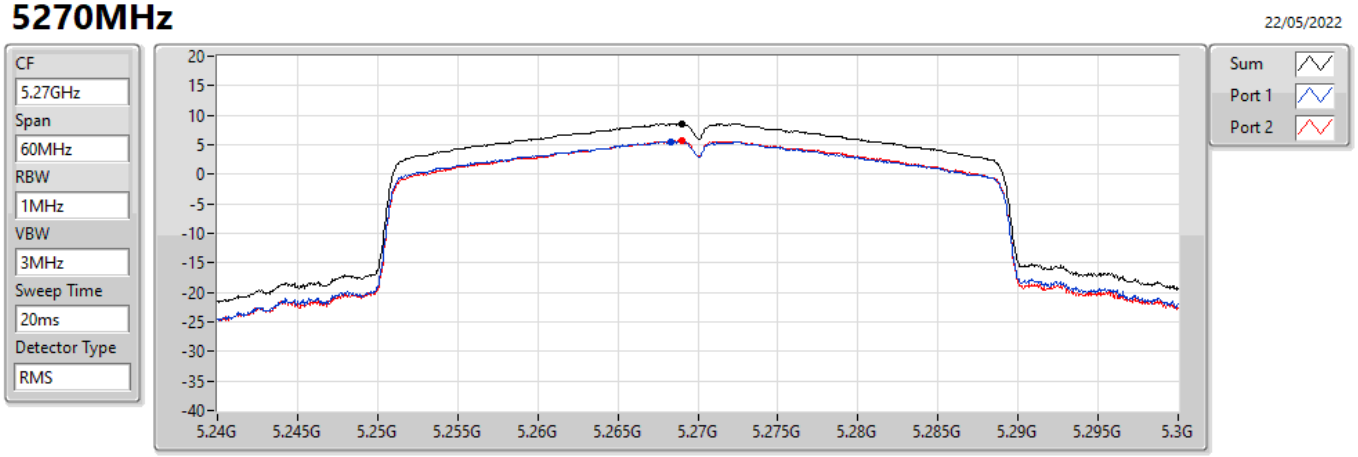

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.63	8.63	5.58	5.72

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5310MHz

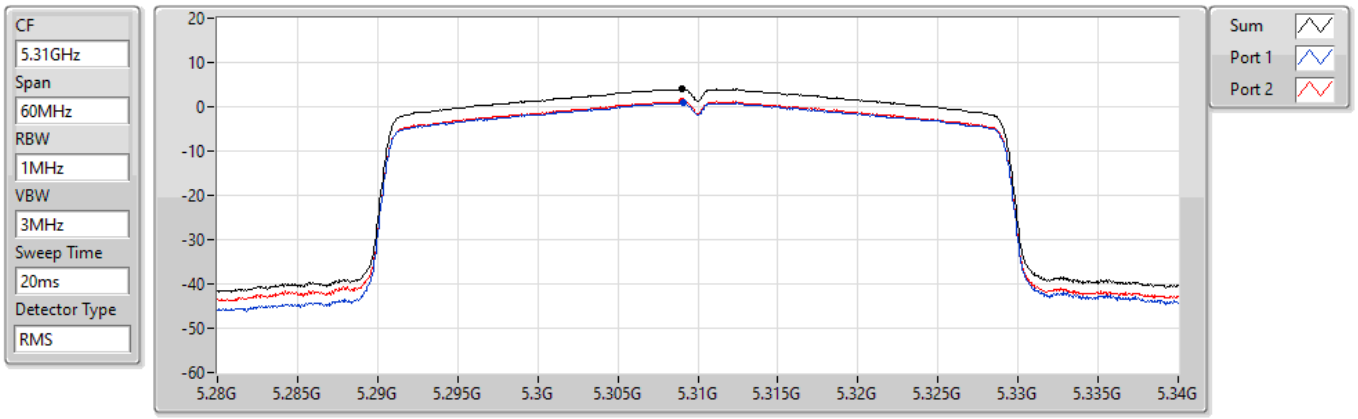

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.98	3.98	0.84	1.16

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5510MHz

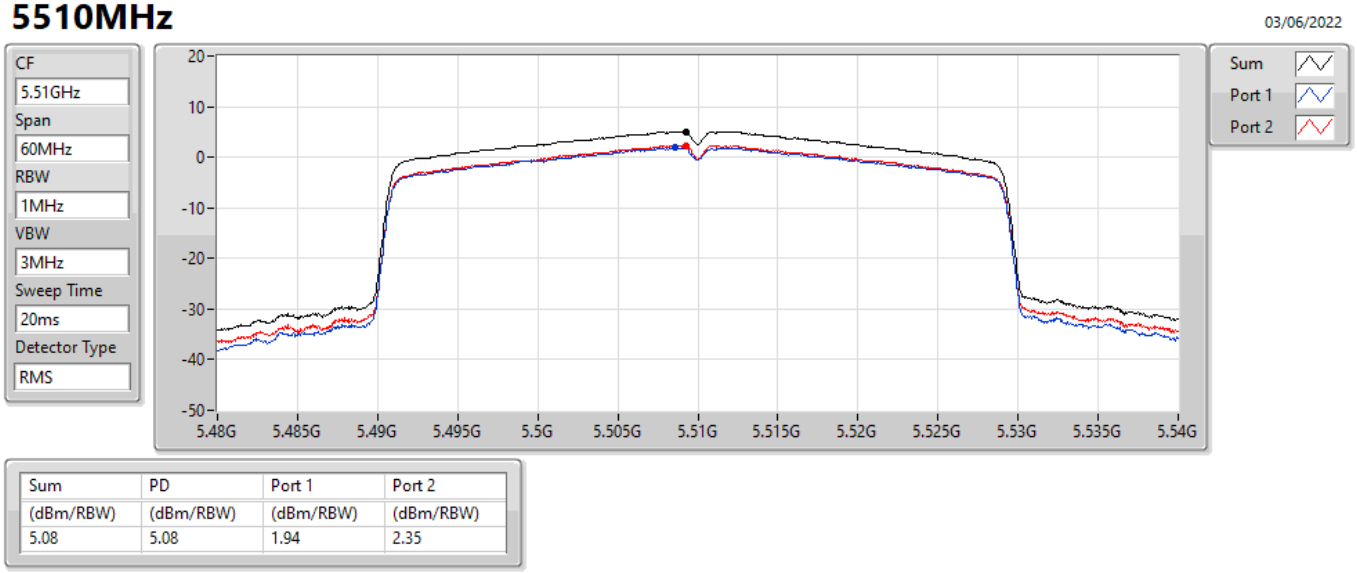

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.08	5.08	1.94	2.35

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5550MHz

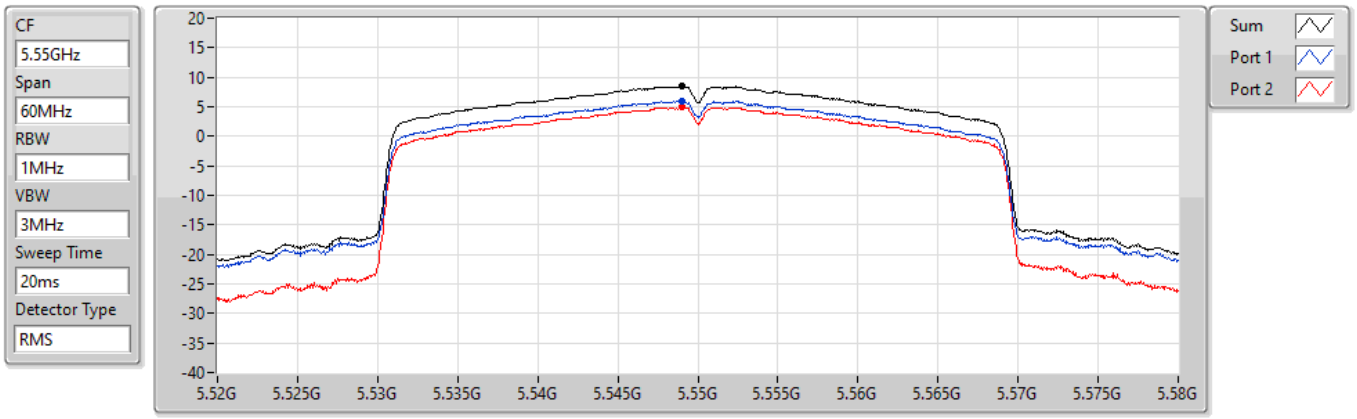

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.50	8.50	5.99	4.93

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5670MHz

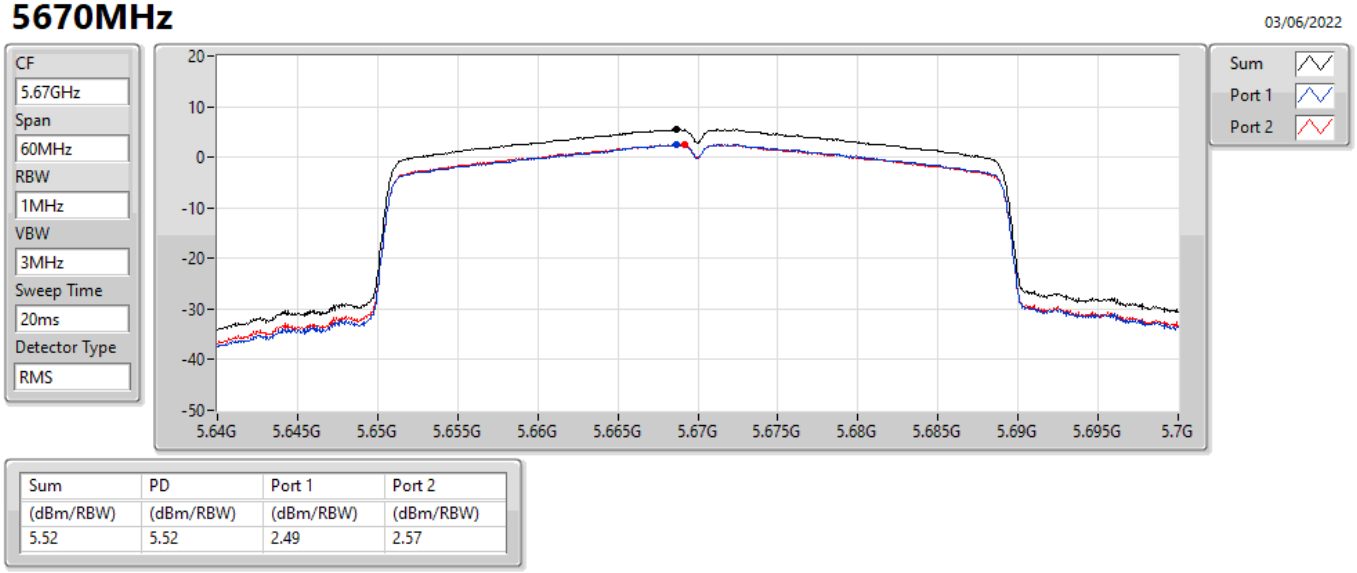

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.52	5.52	2.49	2.57

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5710MHz Straddle 5.47-5.725GHz

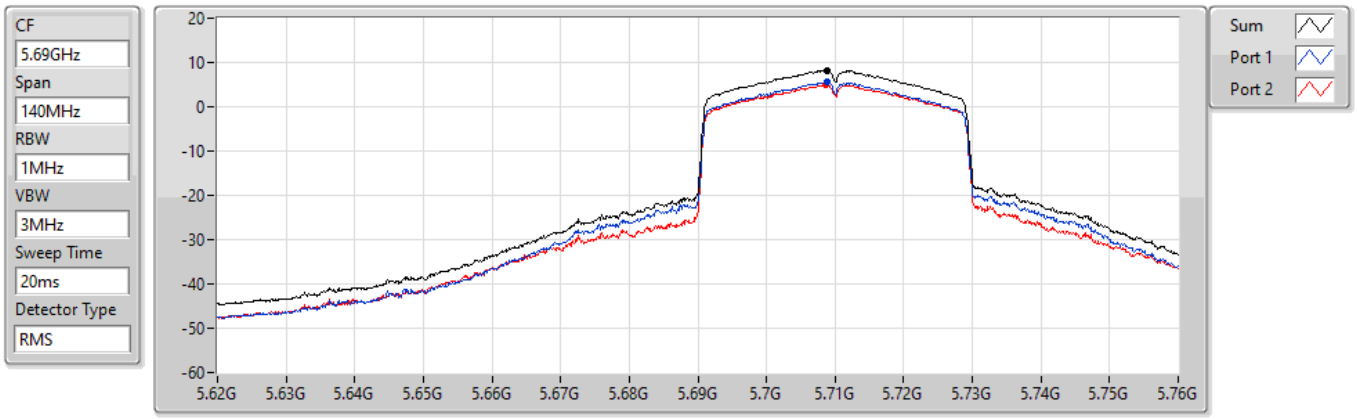

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.20	8.20	5.50	4.90

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5710MHz Straddle 5.725-5.85GHz

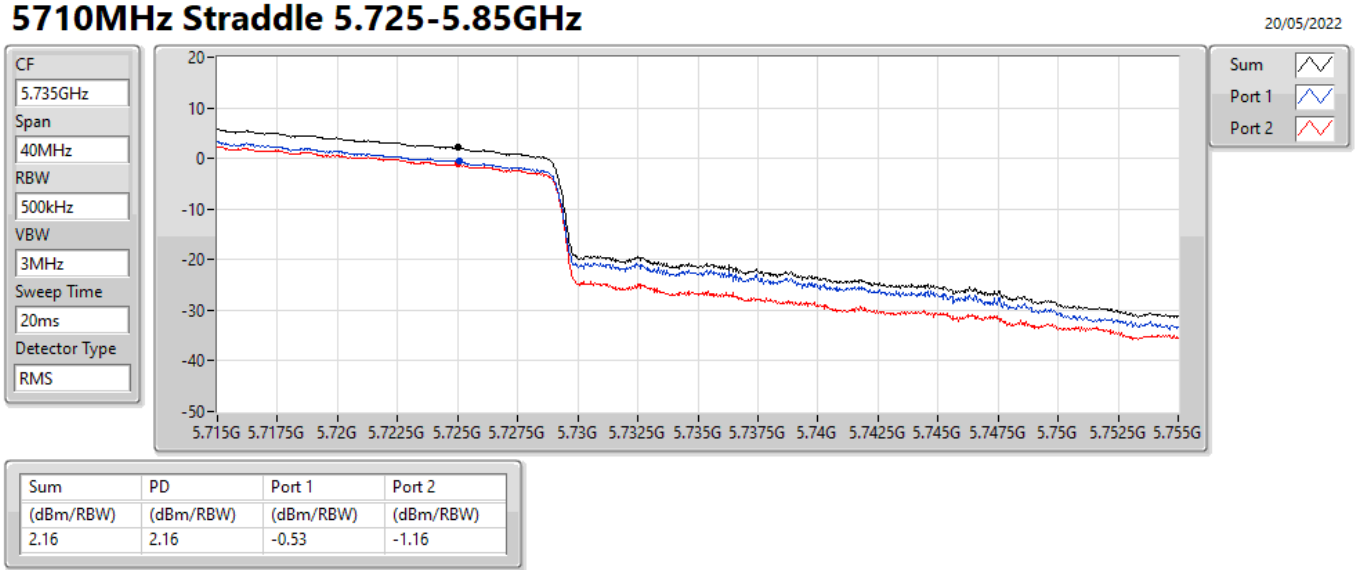

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.16	2.16	-0.53	-1.16

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5755MHz

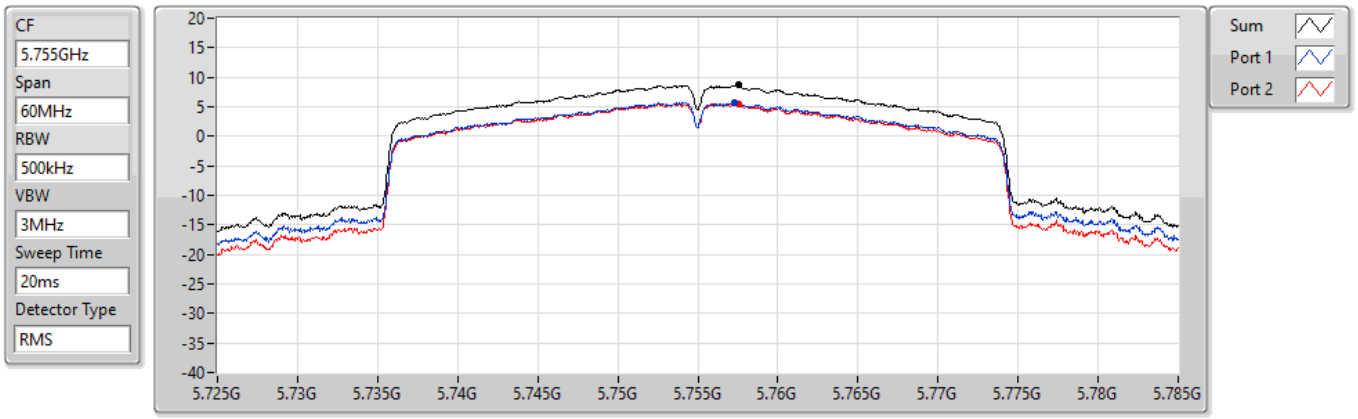

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.65	8.65	5.76	5.57

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5795MHz

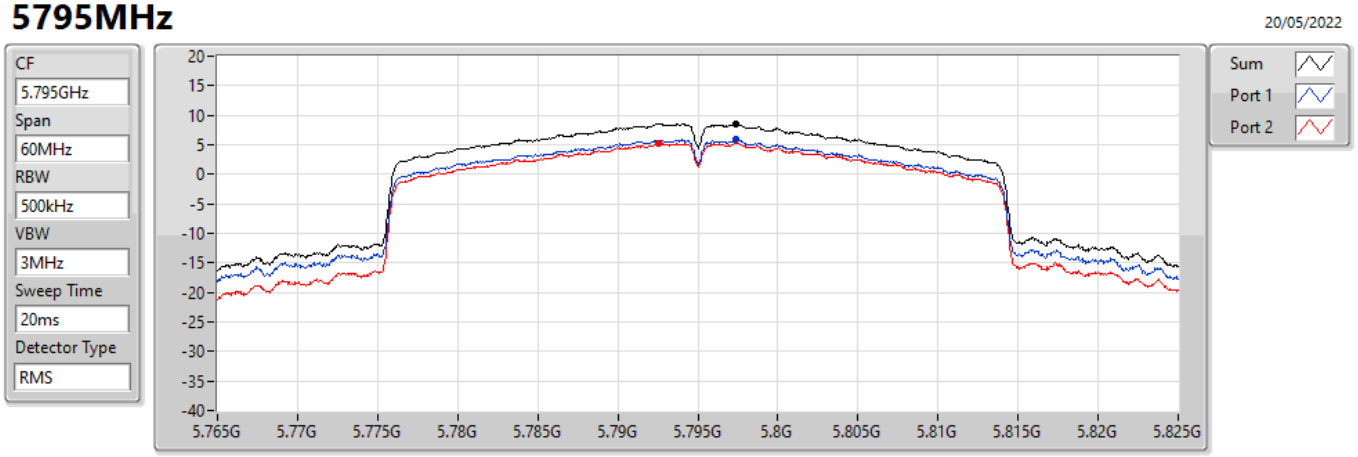

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.55	8.55	5.88	5.24

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5210MHz

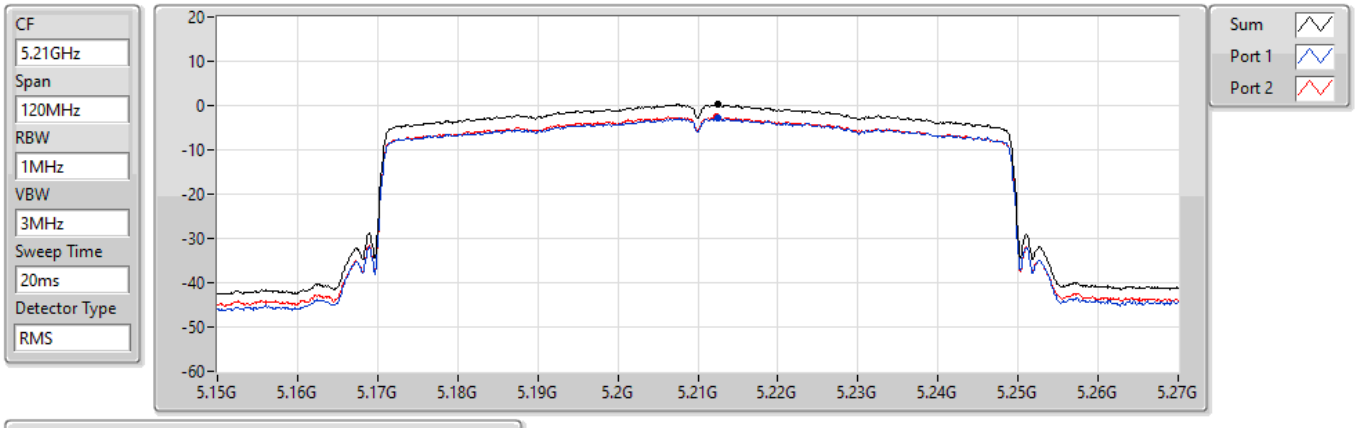

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.30	0.30	-2.85	-2.43

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5290MHz

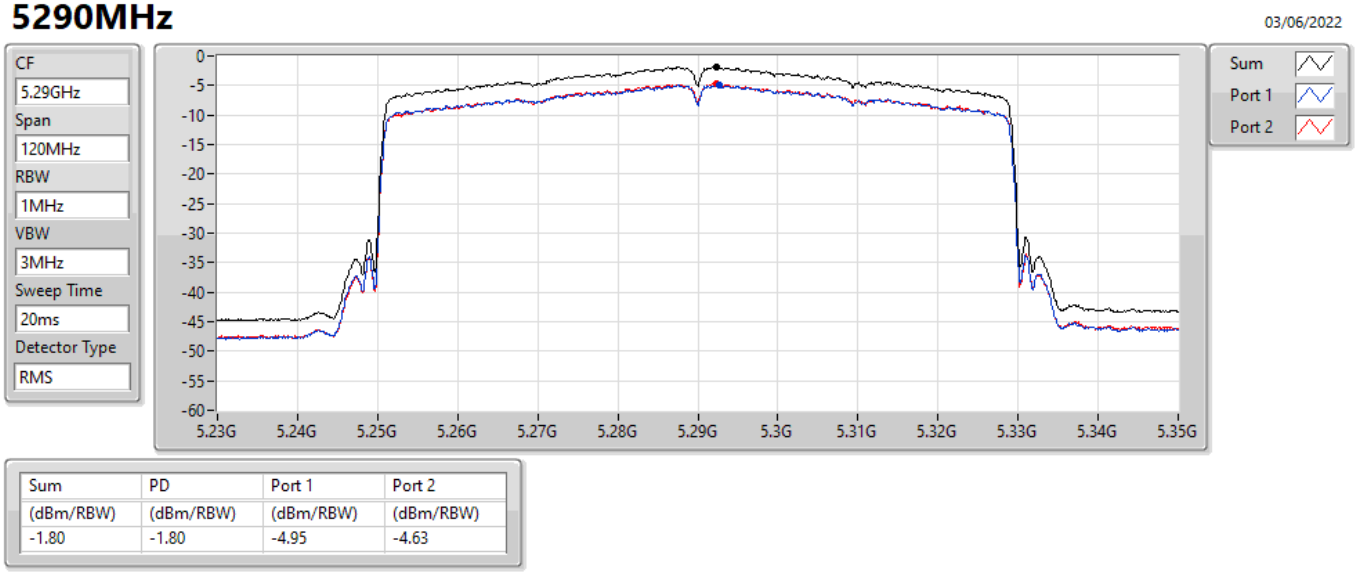

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.80	-1.80	-4.95	-4.63

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5530MHz

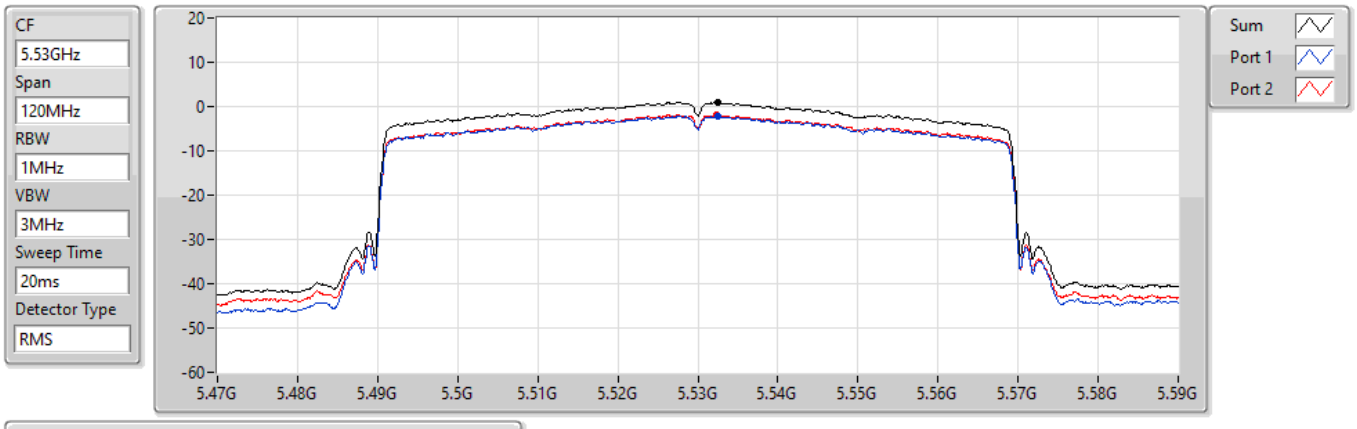

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.04	1.04	-2.12	-1.72

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5610MHz

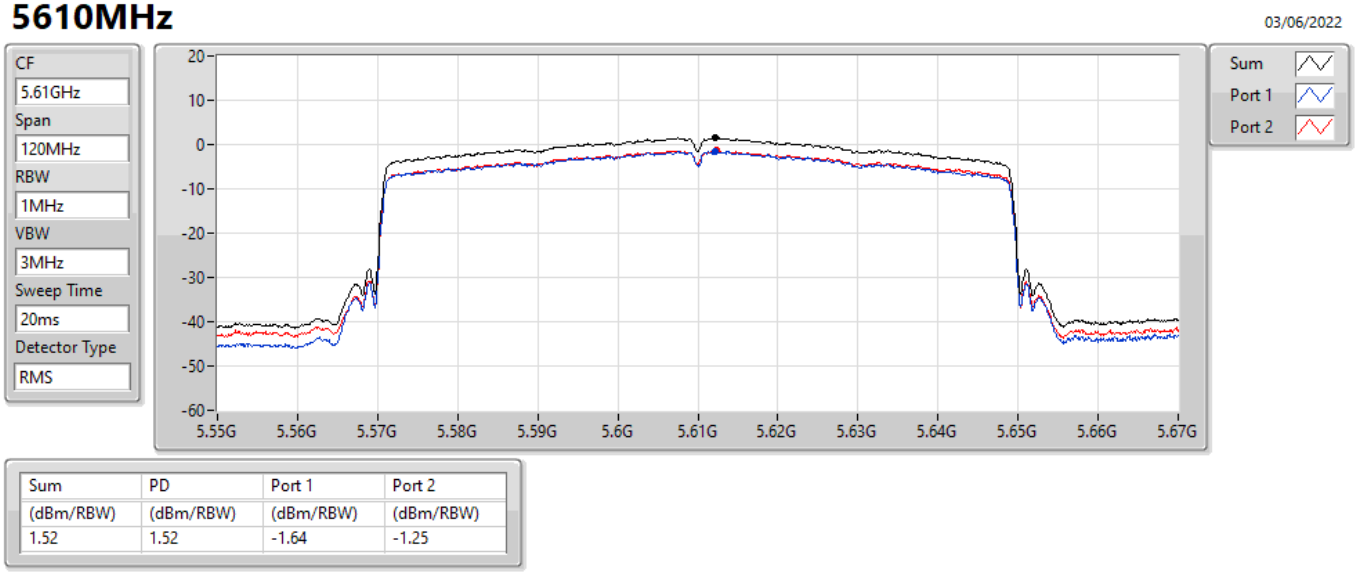

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.52	1.52	-1.64	-1.25

802.11ax HEW80_Nss1,(MCS0)_2TX PSD

5690MHz Straddle 5.47-5.725GHz

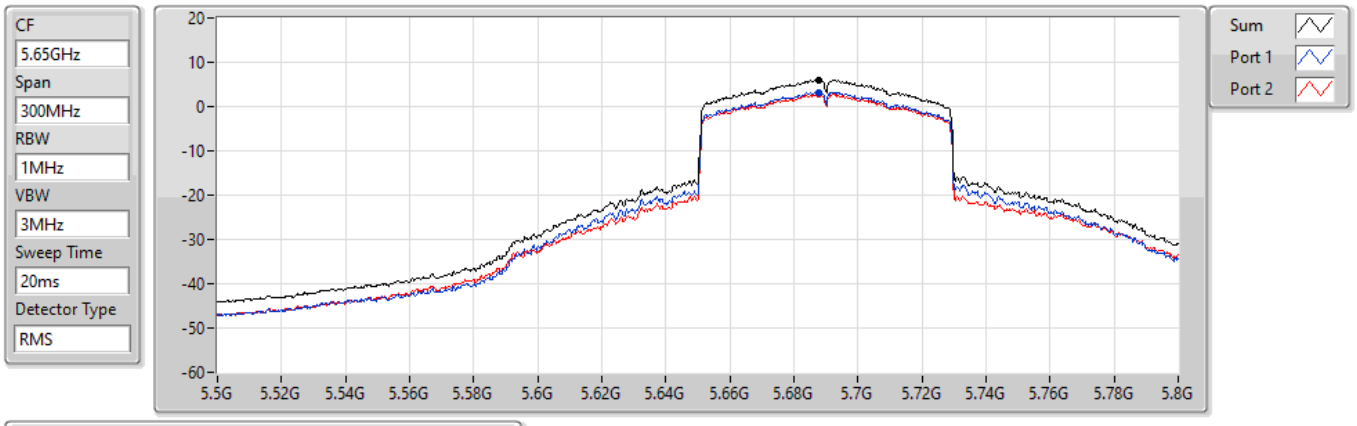


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.09	6.09	3.28	2.86

802.11ax HEW80_Nss1,(MCS0)_2TX PSD

5690MHz Straddle 5.725-5.85GHz

03/06/2022

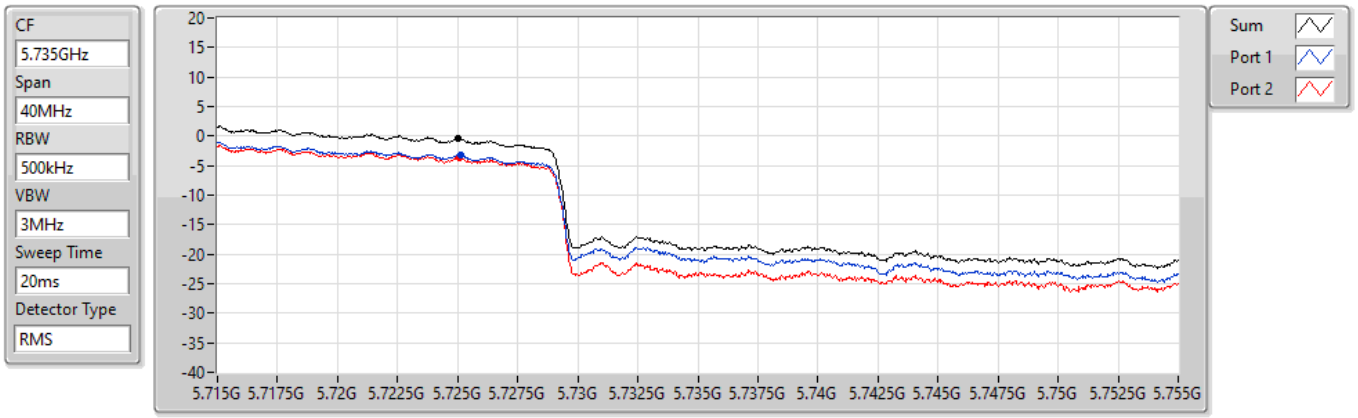


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.38	-0.38	-3.09	-3.58

802.11ax HEW80_Nss1,(MCS0)_2TX PSD

5775MHz


03/06/2022

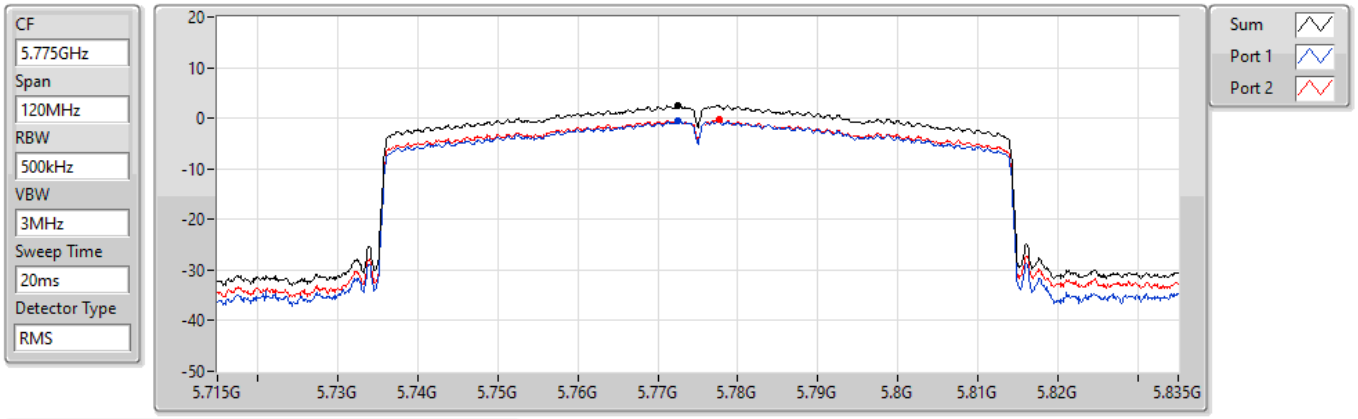

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.63	2.63	-0.51	-0.18

802.11ax HEW160_Nss1,(MCS0)_2TX PSD


5250MHz Straddle 5.15-5.25GHz

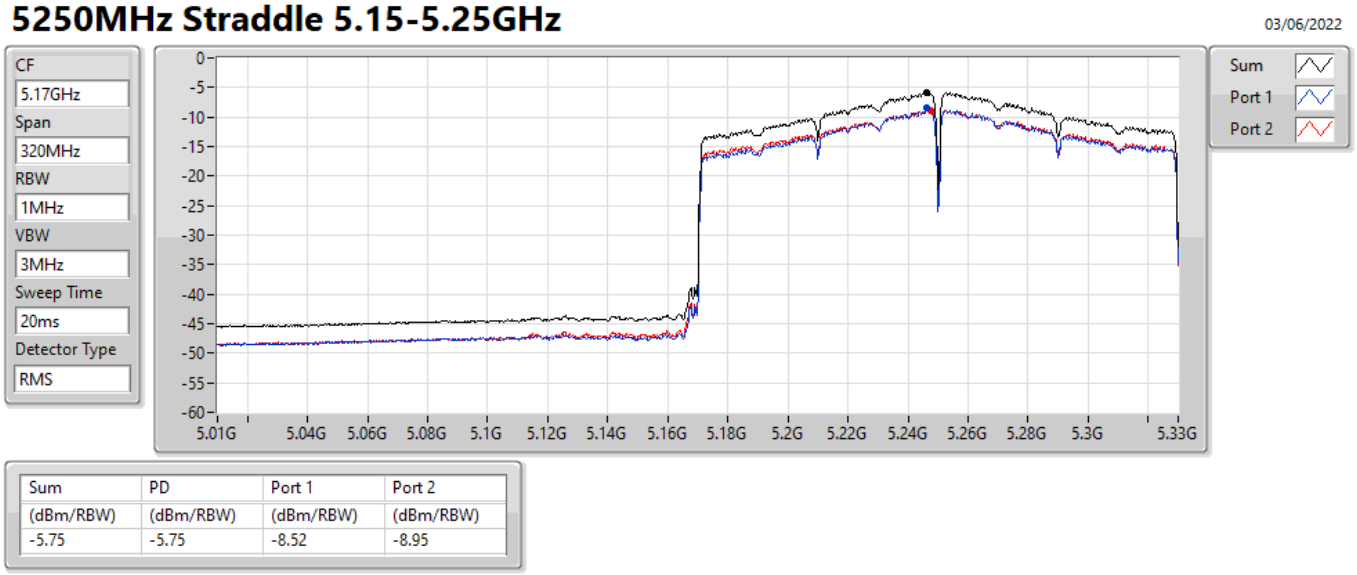


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.75	-5.75	-8.52	-8.95

802.11ax HEW160_Nss1,(MCS0)_2TX PSD

5250MHz Straddle 5.25-5.35GHz

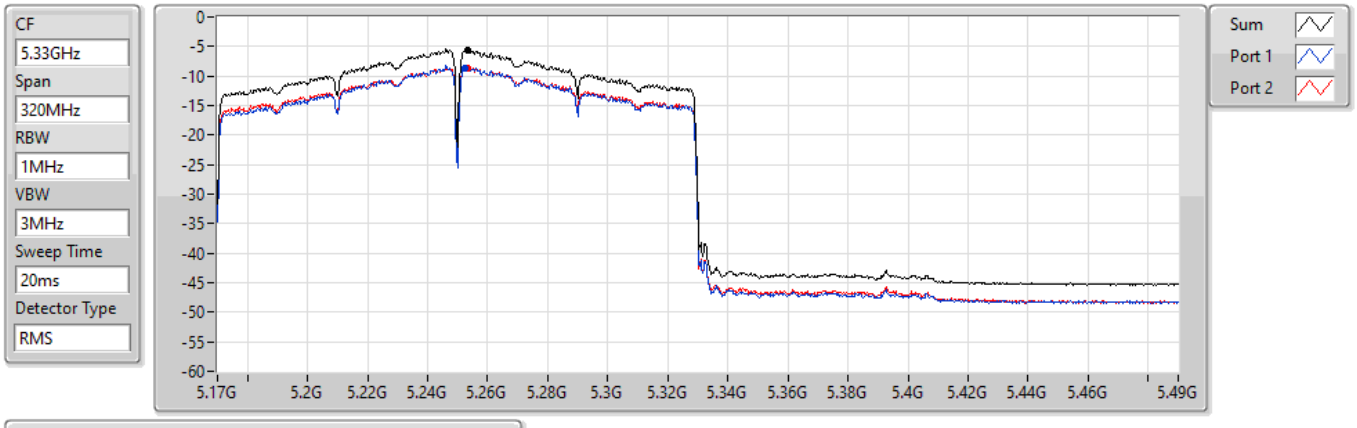

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.66	-5.66	-8.65	-8.70

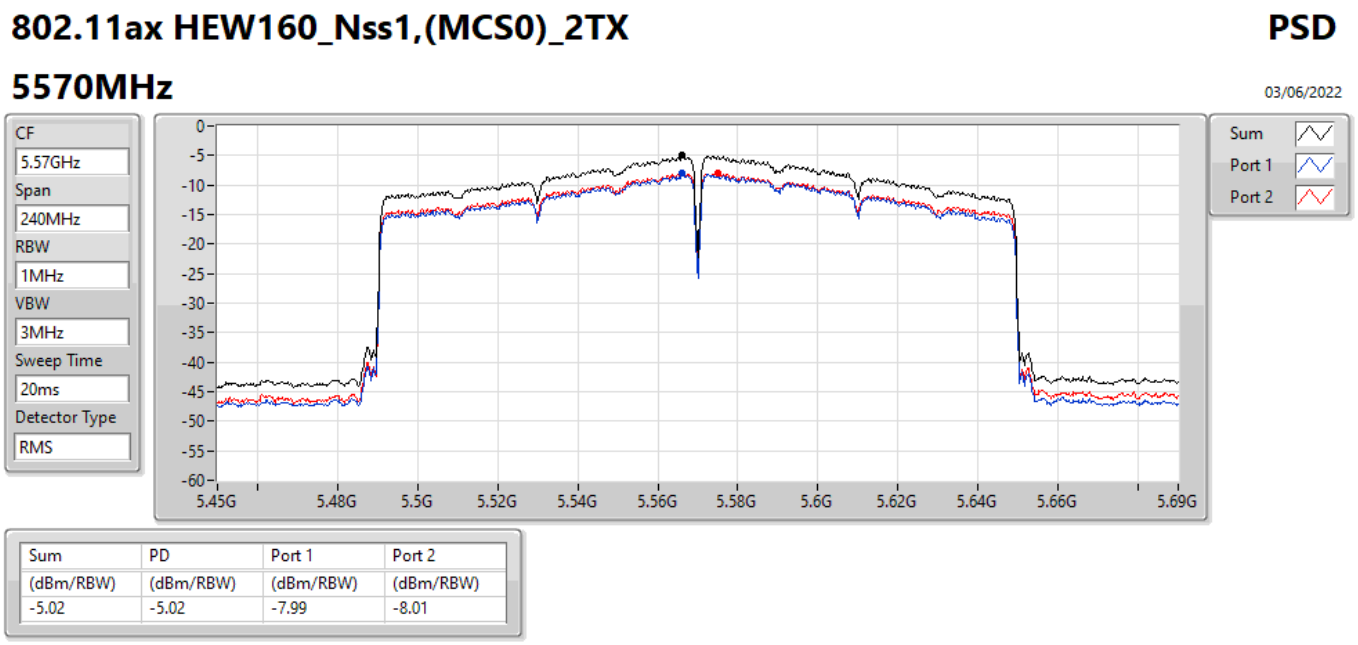

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.02	-5.02	-7.99	-8.01

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11a_Nss1,(6Mbps)_2TX	8.89
802.11ax HEW20_Nss1,(MCS0)_2TX	8.87
802.11ax HEW40_Nss1,(MCS0)_2TX	8.82
802.11ax HEW80_Nss1,(MCS0)_2TX	-0.93
802.11ax HEW160_Nss1,(MCS0)_2TX	-6.92
5.25-5.35GHz	-
802.11a_Nss1,(6Mbps)_2TX	8.97
802.11ax HEW20_Nss1,(MCS0)_2TX	8.86
802.11ax HEW40_Nss1,(MCS0)_2TX	8.41
802.11ax HEW80_Nss1,(MCS0)_2TX	-2.96
802.11ax HEW160_Nss1,(MCS0)_2TX	-6.83
5.47-5.725GHz	-
802.11a_Nss1,(6Mbps)_2TX	8.93
802.11ax HEW20_Nss1,(MCS0)_2TX	8.97
802.11ax HEW40_Nss1,(MCS0)_2TX	8.50
802.11ax HEW80_Nss1,(MCS0)_2TX	3.54
802.11ax HEW160_Nss1,(MCS0)_2TX	-5.81
5.725-5.85GHz	-
802.11a_Nss1,(6Mbps)_2TX	11.82
802.11ax HEW20_Nss1,(MCS0)_2TX	11.25
802.11ax HEW40_Nss1,(MCS0)_2TX	8.65
802.11ax HEW80_Nss1,(MCS0)_2TX	0.96

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5180MHz	Pass	8.01	5.68	5.96	8.80	8.99
5200MHz	Pass	8.01	5.82	6.01	8.89	8.99
5240MHz	Pass	8.01	5.60	5.78	8.70	8.99
5260MHz	Pass	8.01	5.86	6.13	8.97	8.99
5300MHz	Pass	8.01	5.94	5.66	8.80	8.99
5320MHz	Pass	8.01	5.92	5.85	8.89	8.99
5500MHz	Pass	8.01	5.79	5.99	8.86	8.99
5580MHz	Pass	8.01	5.73	6.07	8.91	8.99
5700MHz	Pass	8.01	3.89	4.09	6.97	8.99
5720MHz Straddle 5.47-5.725GHz	Pass	8.01	5.73	6.10	8.93	8.99
5720MHz Straddle 5.725-5.85GHz	Pass	8.01	1.67	2.29	5.00	27.99
5745MHz	Pass	8.01	8.18	8.07	11.12	27.99
5785MHz	Pass	8.01	8.72	9.00	11.82	27.99
5825MHz	Pass	8.01	8.54	7.61	11.09	27.99
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	8.01	5.67	5.89	8.79	8.99
5200MHz	Pass	8.01	5.75	5.98	8.87	8.99
5240MHz	Pass	8.01	5.77	5.96	8.84	8.99
5260MHz	Pass	8.01	5.67	6.00	8.82	8.99
5300MHz	Pass	8.01	5.75	5.74	8.75	8.99
5320MHz	Pass	8.01	5.87	5.88	8.86	8.99
5500MHz	Pass	8.01	5.07	5.42	8.23	8.99
5580MHz	Pass	8.01	5.74	6.11	8.93	8.99
5700MHz	Pass	8.01	3.58	3.86	6.70	8.99
5720MHz Straddle 5.47-5.725GHz	Pass	8.01	5.82	6.15	8.97	8.99
5720MHz Straddle 5.725-5.85GHz	Pass	8.01	1.57	1.97	4.77	27.99
5745MHz	Pass	8.01	8.25	8.34	11.25	27.99
5785MHz	Pass	8.01	8.29	8.23	11.24	27.99
5825MHz	Pass	8.01	8.25	7.29	10.74	27.99
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5190MHz	Pass	8.01	1.30	1.72	4.47	8.99
5230MHz	Pass	8.01	6.02	5.60	8.82	8.99
5270MHz	Pass	8.01	5.67	5.17	8.41	8.99
5310MHz	Pass	8.01	0.84	1.16	3.98	8.99
5510MHz	Pass	8.01	1.15	1.57	4.27	8.99
5550MHz	Pass	8.01	5.99	4.93	8.50	8.99
5670MHz	Pass	8.01	1.27	2.05	4.63	8.99
5710MHz Straddle 5.47-5.725GHz	Pass	8.01	5.50	4.90	8.20	8.99
5710MHz Straddle 5.725-5.85GHz	Pass	8.01	-0.53	-1.16	2.16	27.99
5755MHz	Pass	8.01	5.76	5.57	8.65	27.99
5795MHz	Pass	8.01	5.88	5.24	8.55	27.99
802.11ax HEW80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5210MHz	Pass	8.01	-4.03	-3.75	-0.93	8.99
5290MHz	Pass	8.01	-5.94	-5.87	-2.96	8.99
5530MHz	Pass	8.01	-3.03	-2.81	0.01	8.99
5610MHz	Pass	8.01	-1.47	-1.02	1.72	8.99
5690MHz Straddle 5.47-5.725GHz	Pass	8.01	0.45	0.68	3.54	8.99
5690MHz Straddle 5.725-5.85GHz	Pass	8.01	-5.69	-5.60	-2.66	27.99
5775MHz	Pass	8.01	-2.21	-1.82	0.96	27.99
802.11ax HEW160_Nss1,(MCS0)_2TX	-	-	-	-	-	-

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
5250MHz Straddle 5.15-5.25GHz	Pass	8.01	-9.67	-10.08	-6.92	8.99
5250MHz Straddle 5.25-5.35GHz	Pass	8.01	-9.76	-9.91	-6.83	8.99
5570MHz	Pass	8.01	-8.90	-8.69	-5.81	8.99

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11a_Nss1,(6Mbps)_2TX PSD


5180MHz

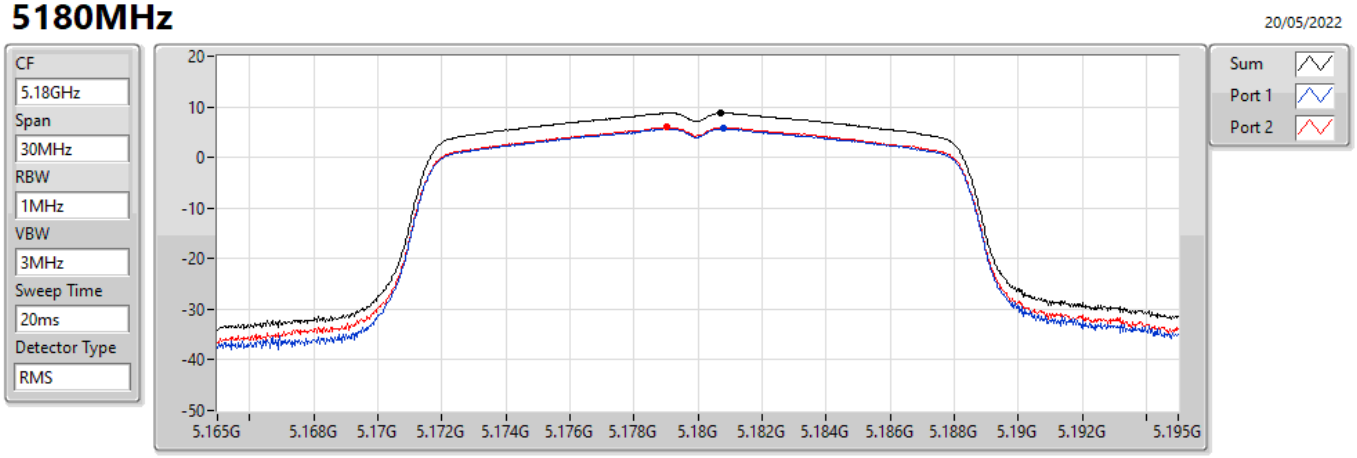

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.80	8.80	5.68	5.96

802.11a_Nss1,(6Mbps)_2TX PSD


5200MHz

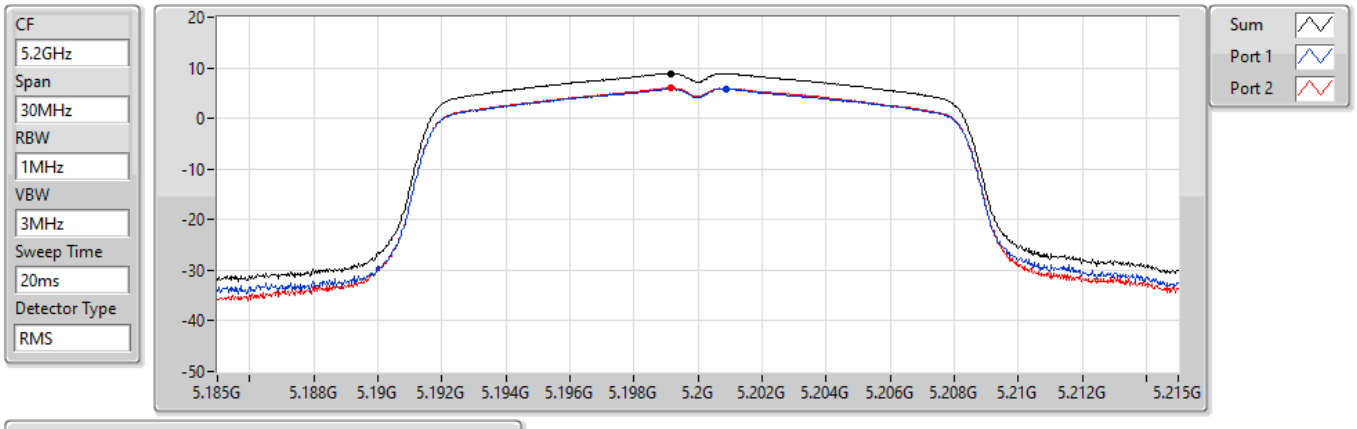

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.89	8.89	5.82	6.01

802.11a_Nss1,(6Mbps)_2TX PSD


5240MHz

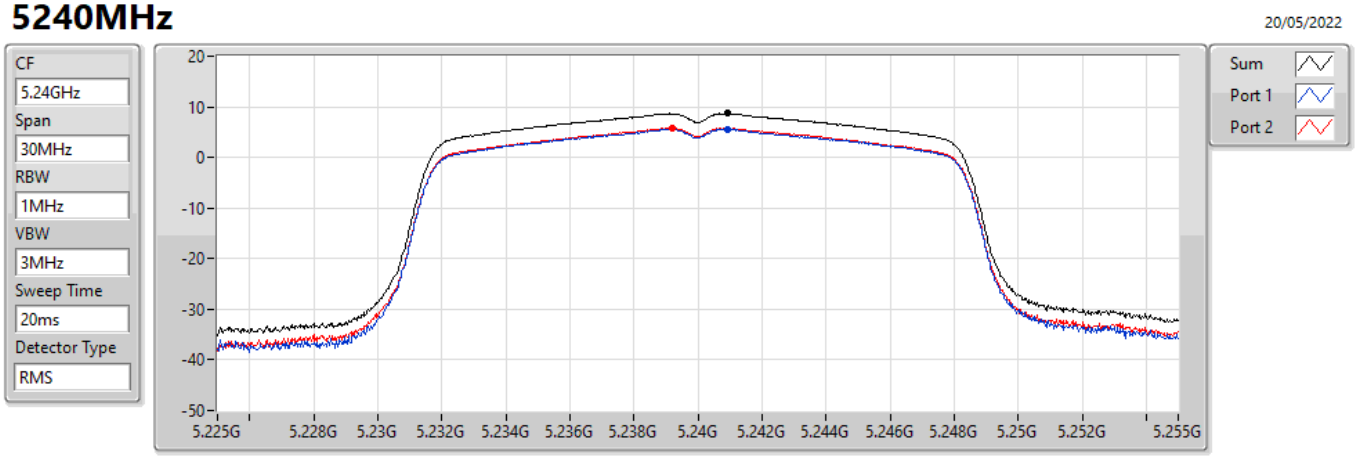

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.70	8.70	5.60	5.78

802.11a_Nss1,(6Mbps)_2TX PSD


5260MHz

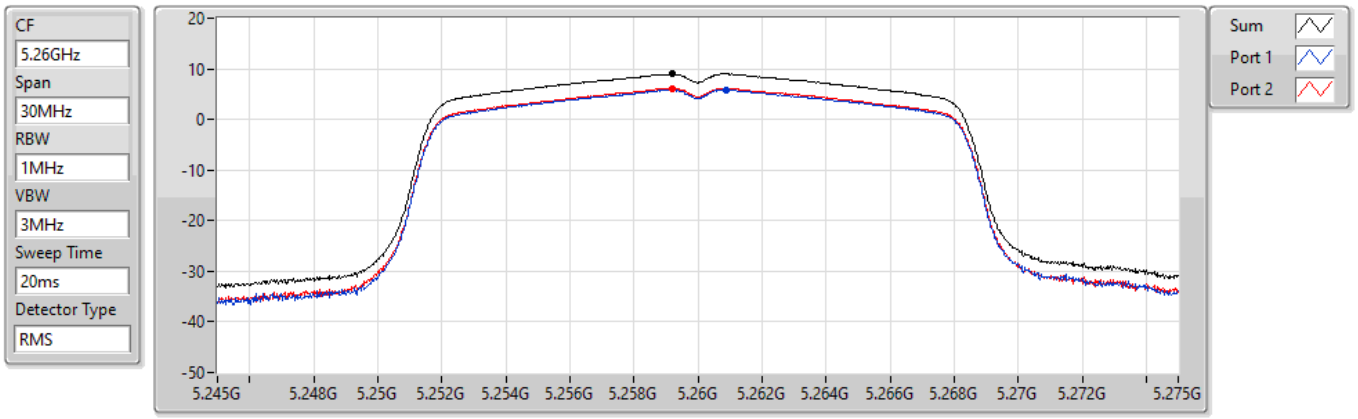

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.97	8.97	5.86	6.13

802.11a_Nss1,(6Mbps)_2TX PSD


5300MHz

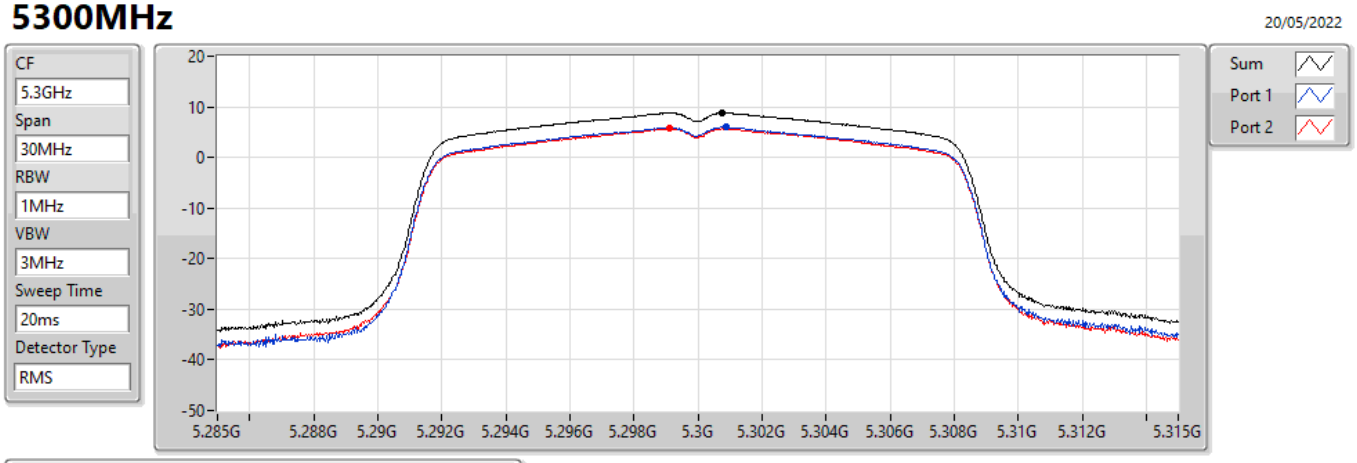

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.80	8.80	5.94	5.66

802.11a_Nss1,(6Mbps)_2TX PSD


5320MHz

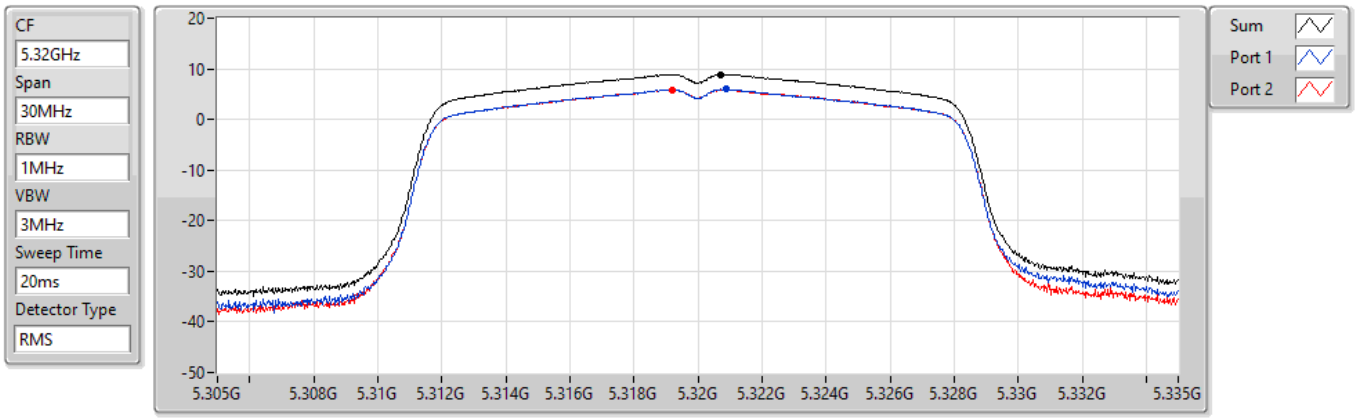

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.89	8.89	5.92	5.85

802.11a_Nss1,(6Mbps)_2TX PSD


5500MHz

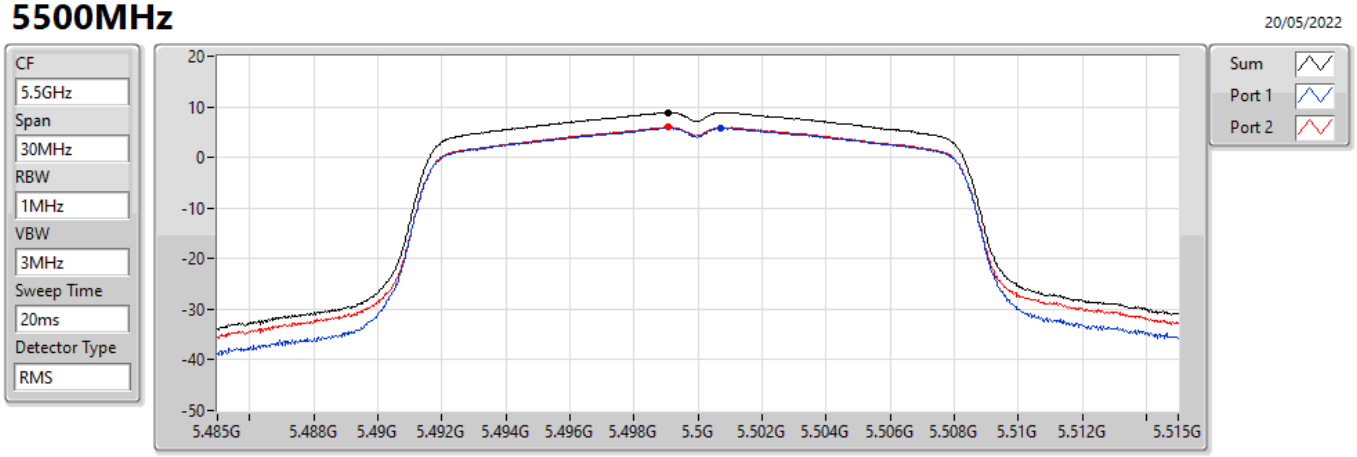

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.86	8.86	5.79	5.99

802.11a_Nss1,(6Mbps)_2TX PSD


5580MHz

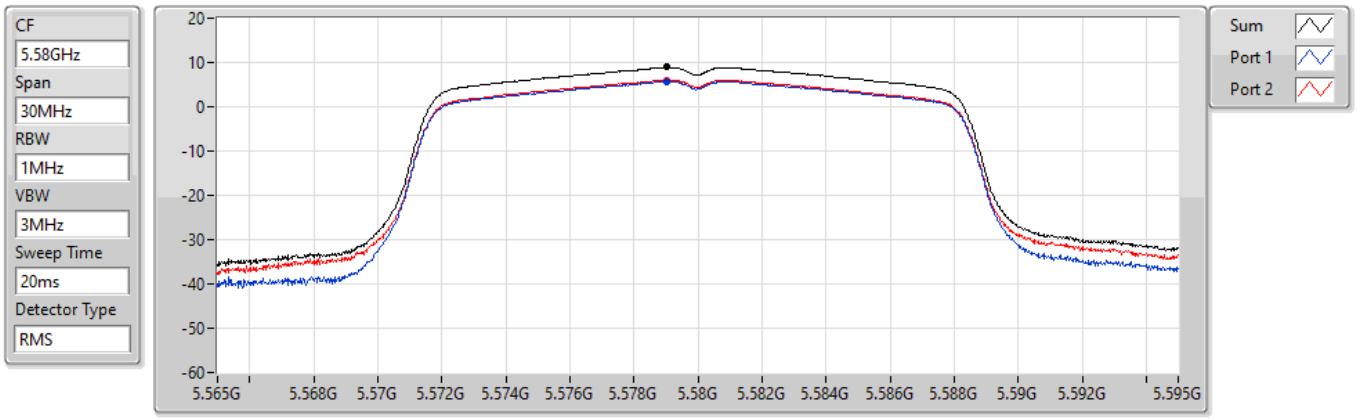

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.91	8.91	5.73	6.07

802.11a_Nss1,(6Mbps)_2TX PSD


5700MHz

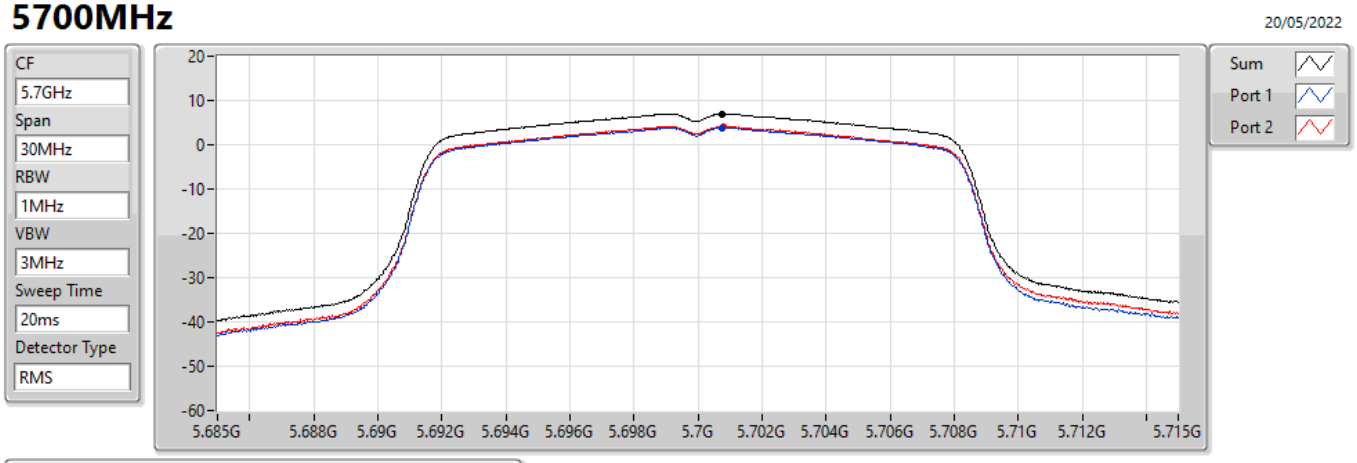

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.97	6.97	3.89	4.09

802.11a_Nss1,(6Mbps)_2TX PSD


5720MHz Straddle 5.47-5.725GHz

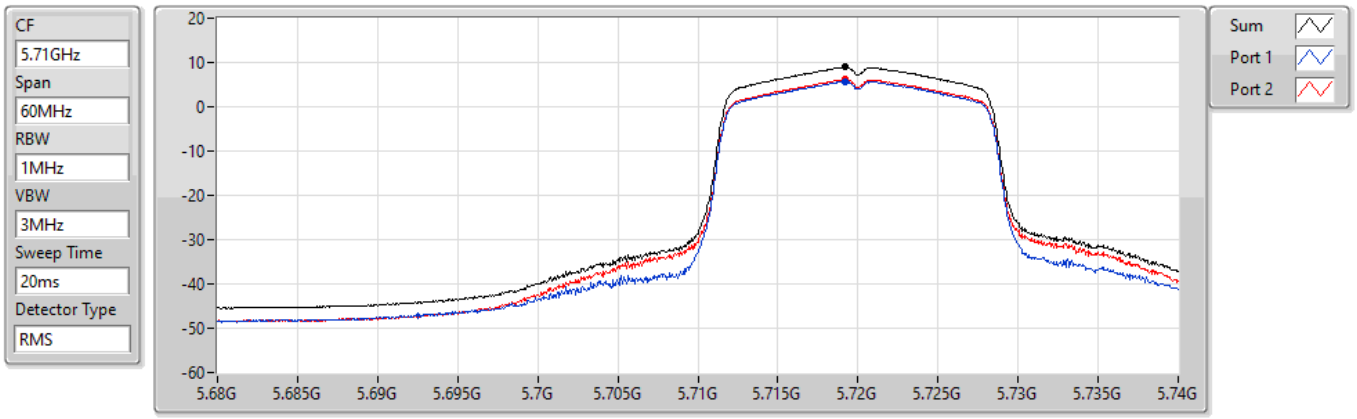

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.93	8.93	5.73	6.10

802.11a_Nss1,(6Mbps)_2TX PSD


5720MHz Straddle 5.725-5.85GHz

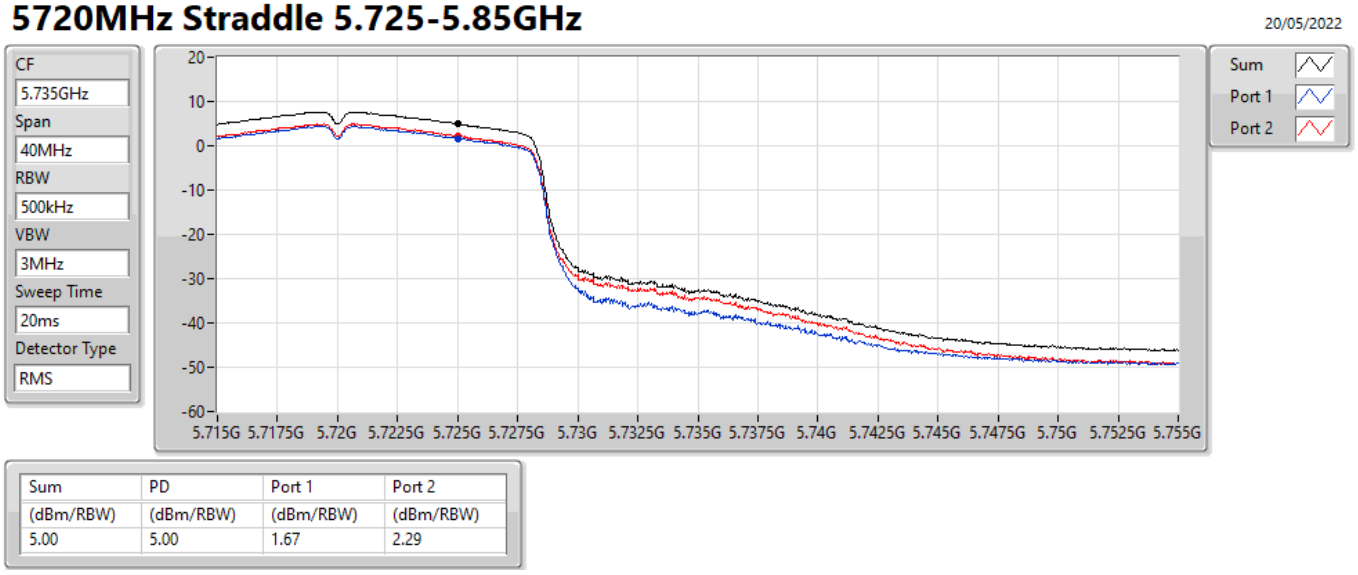

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
5.00	5.00	1.67	2.29

802.11a_Nss1,(6Mbps)_2TX PSD


5745MHz

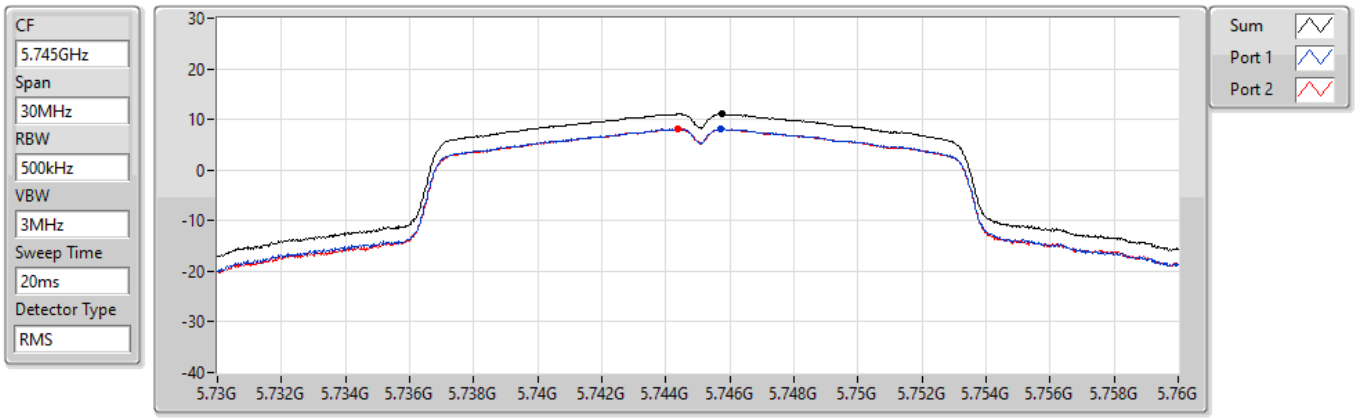

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.12	11.12	8.18	8.07

802.11a_Nss1,(6Mbps)_2TX PSD


5785MHz

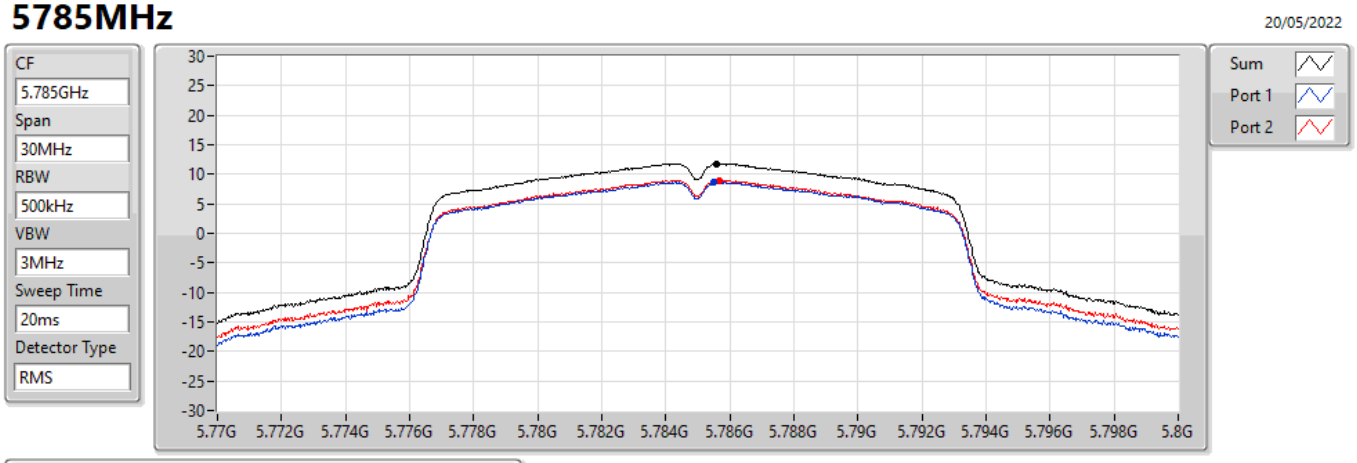

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.82	11.82	8.72	9.00

802.11a_Nss1,(6Mbps)_2TX PSD


5825MHz

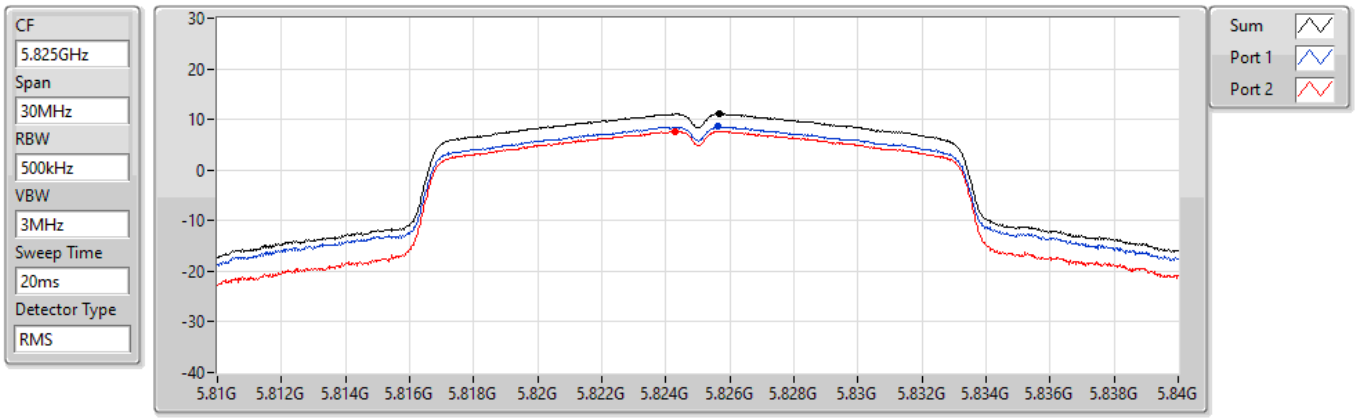

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.09	11.09	8.54	7.61

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5180MHz

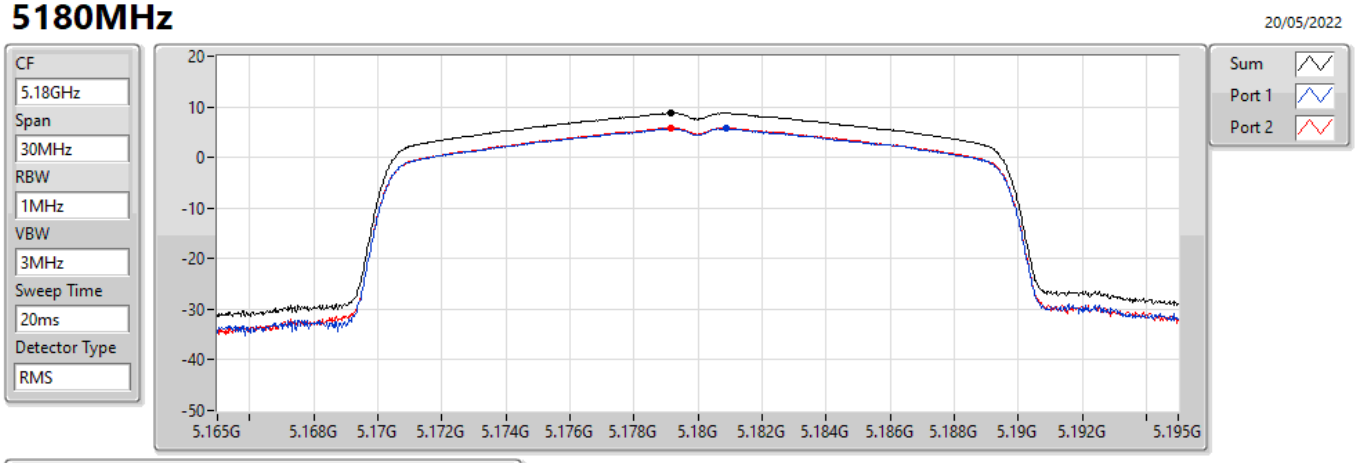

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.79	8.79	5.67	5.89

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5200MHz

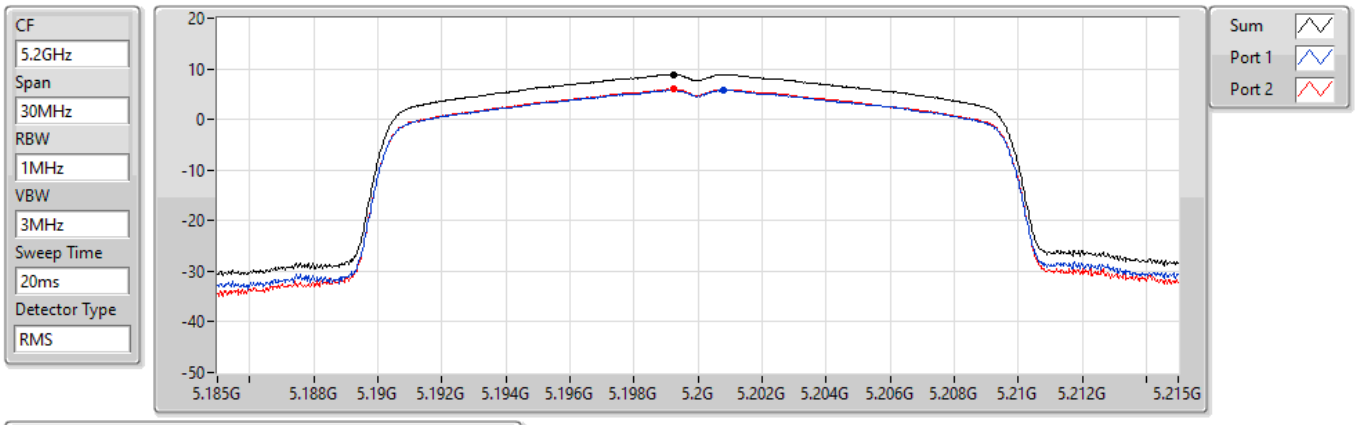

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.87	8.87	5.75	5.98

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5240MHz

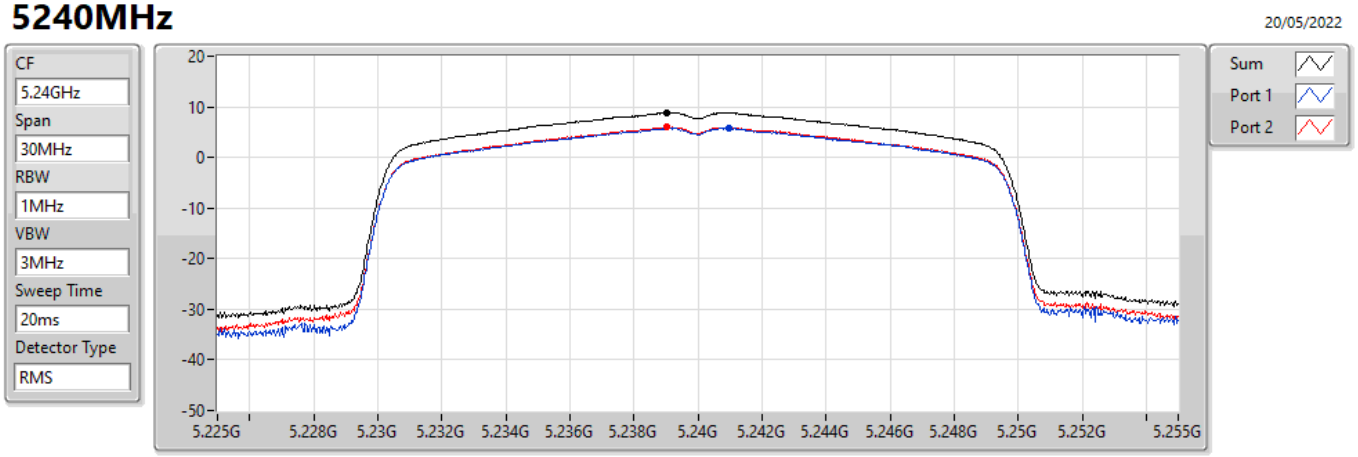

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.84	8.84	5.77	5.96

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5260MHz

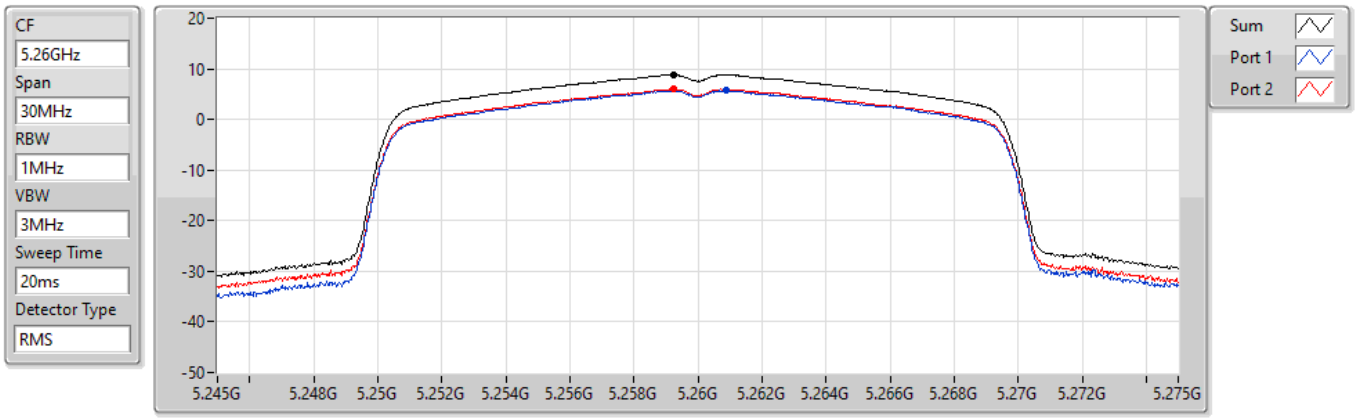

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.82	8.82	5.67	6.00

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5300MHz

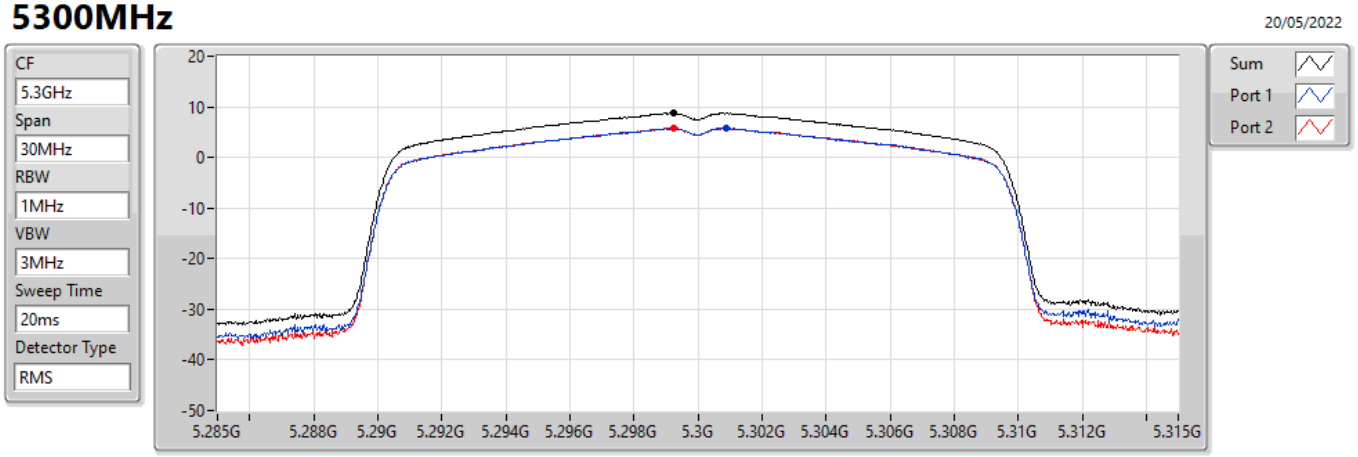

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.75	8.75	5.75	5.74

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5320MHz

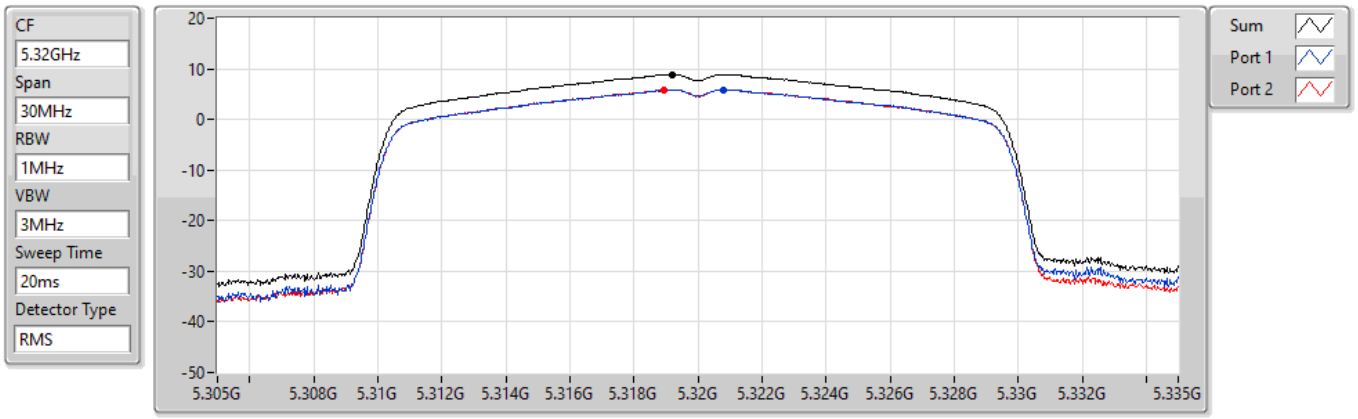

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.86	8.86	5.87	5.88

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5500MHz

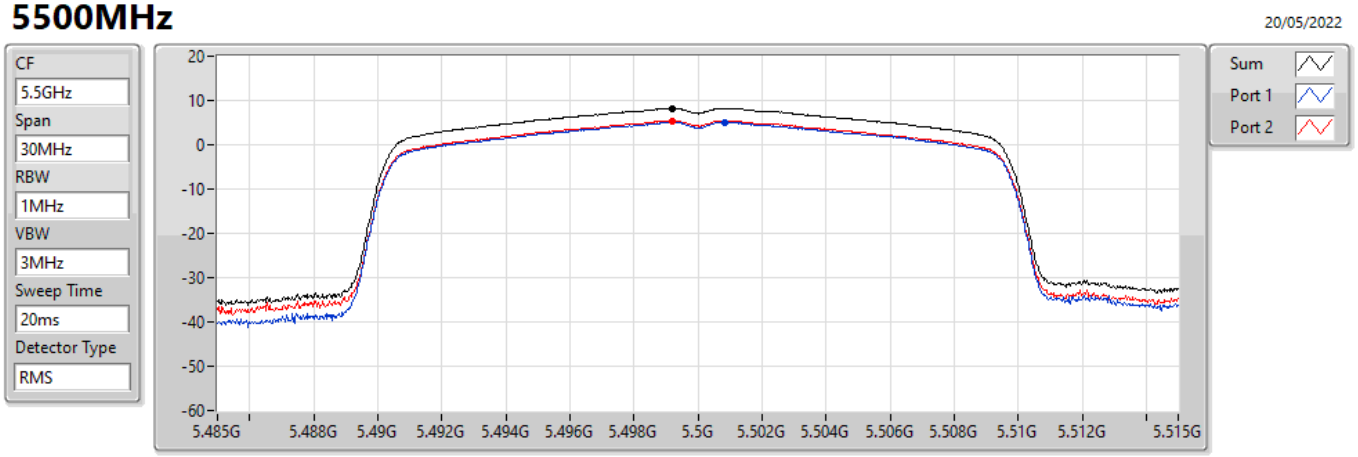

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.23	8.23	5.07	5.42

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5580MHz

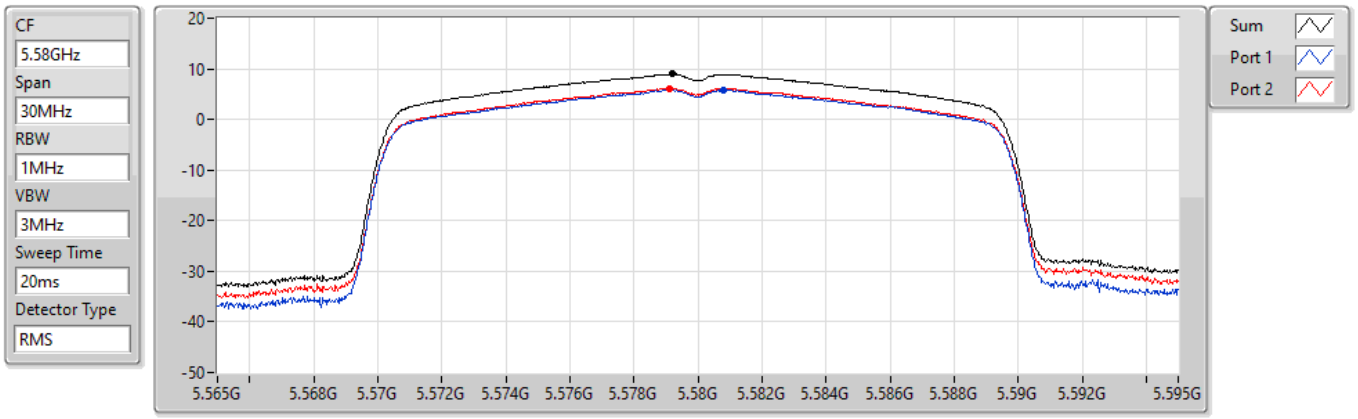

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.93	8.93	5.74	6.11

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5700MHz

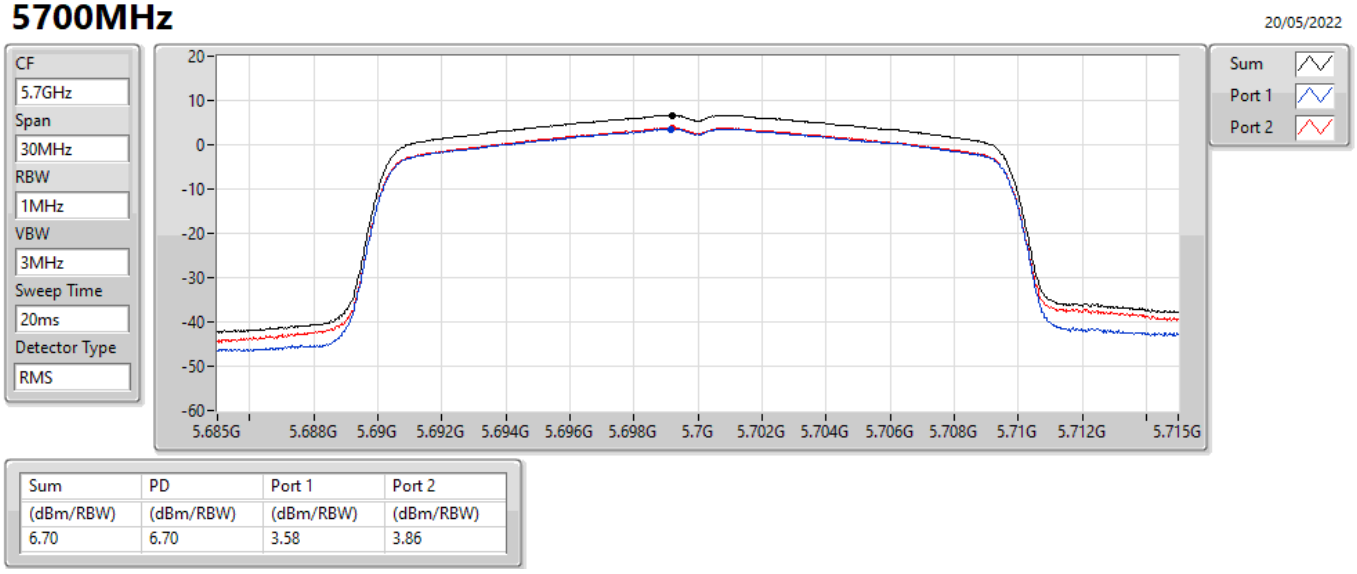

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
6.70	6.70	3.58	3.86

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.47-5.725GHz

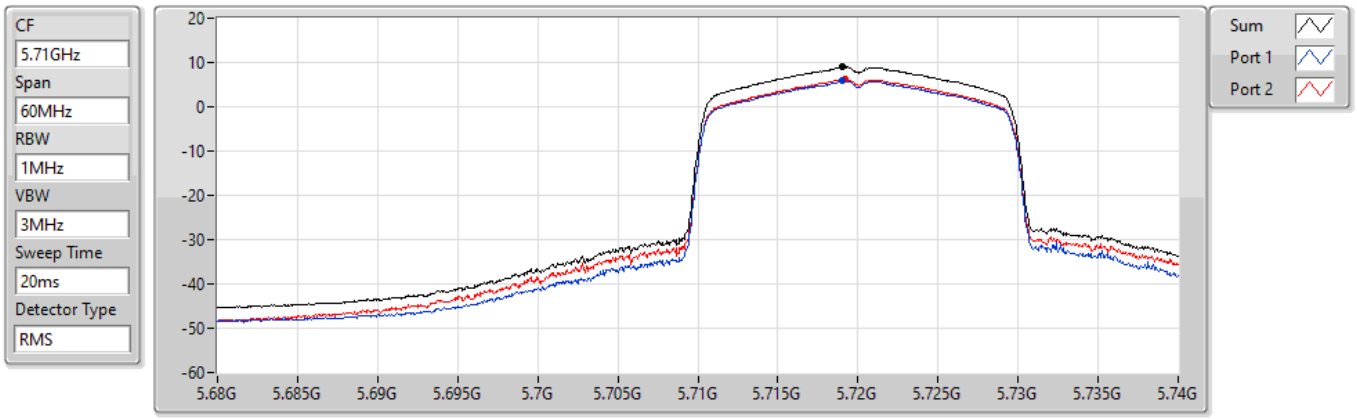

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.97	8.97	5.82	6.15

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.725-5.85GHz

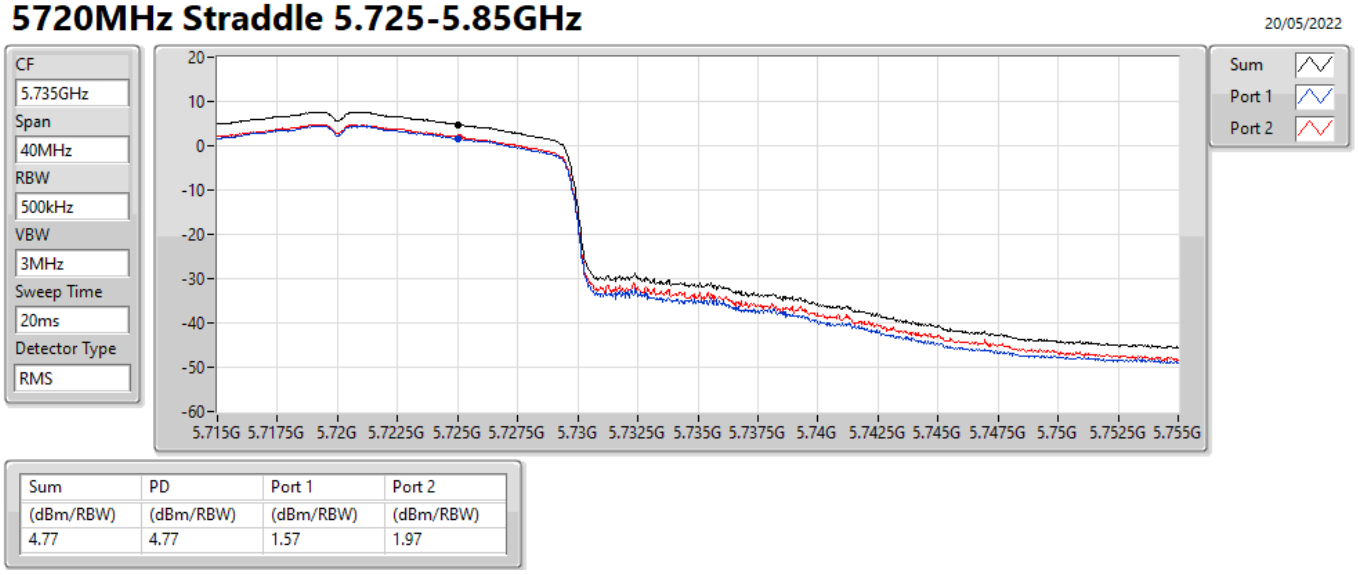

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.77	4.77	1.57	1.97

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5745MHz

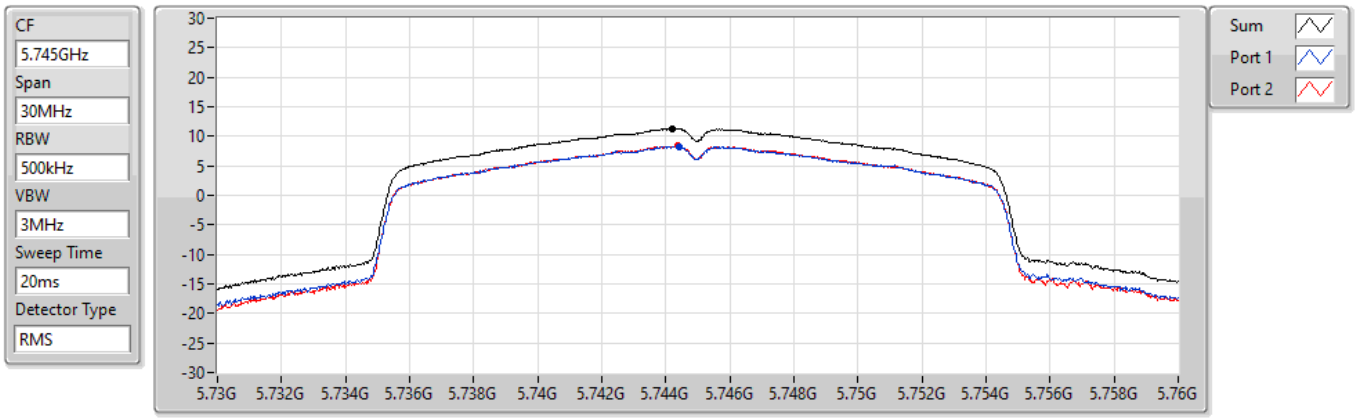

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.25	11.25	8.25	8.34

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5785MHz

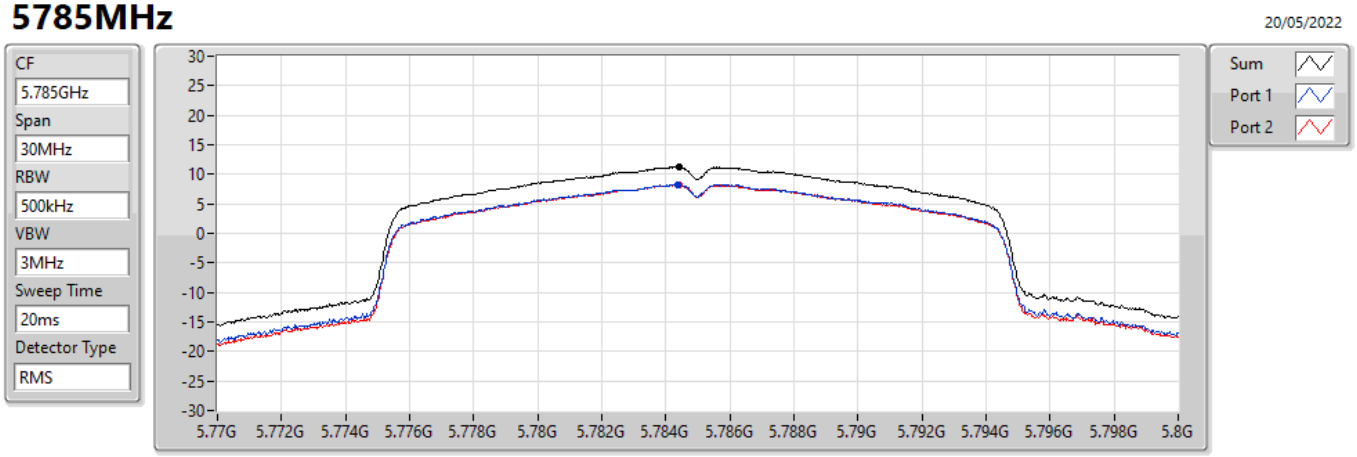

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.24	11.24	8.29	8.23

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5825MHz

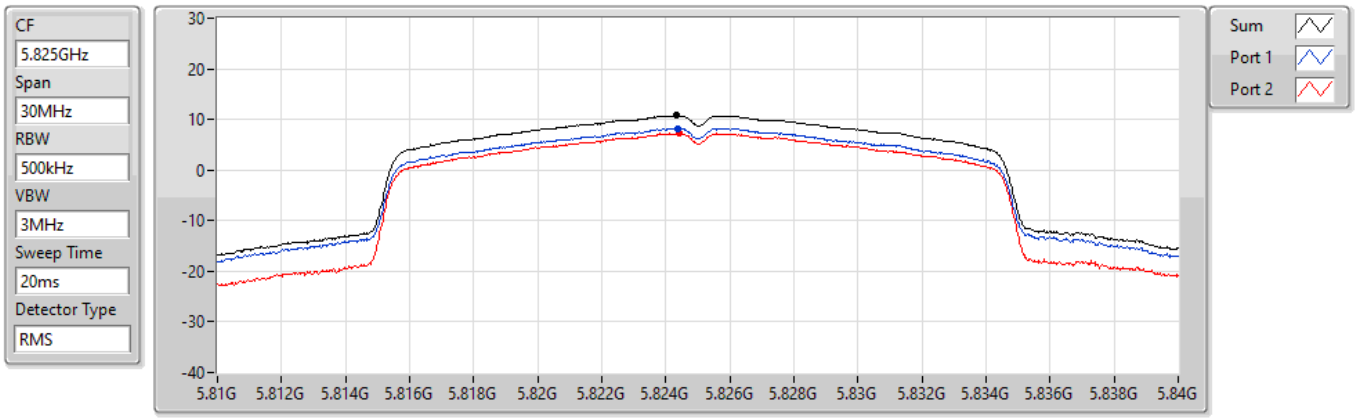

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.74	10.74	8.25	7.29

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5190MHz

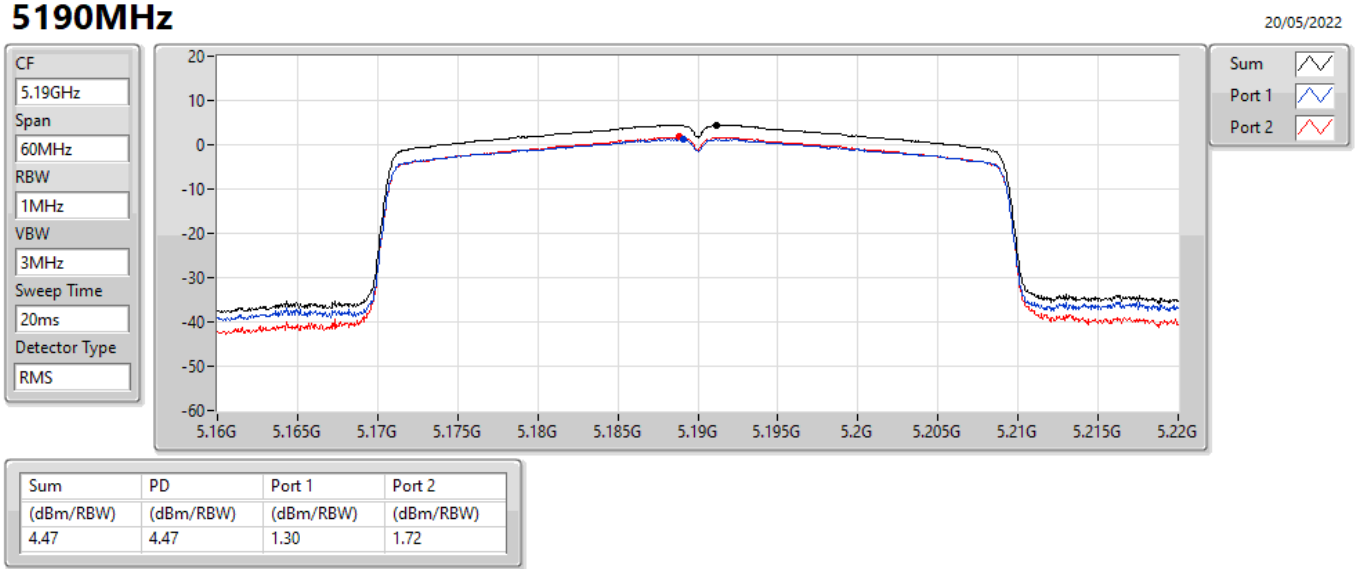

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.47	4.47	1.30	1.72

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5230MHz

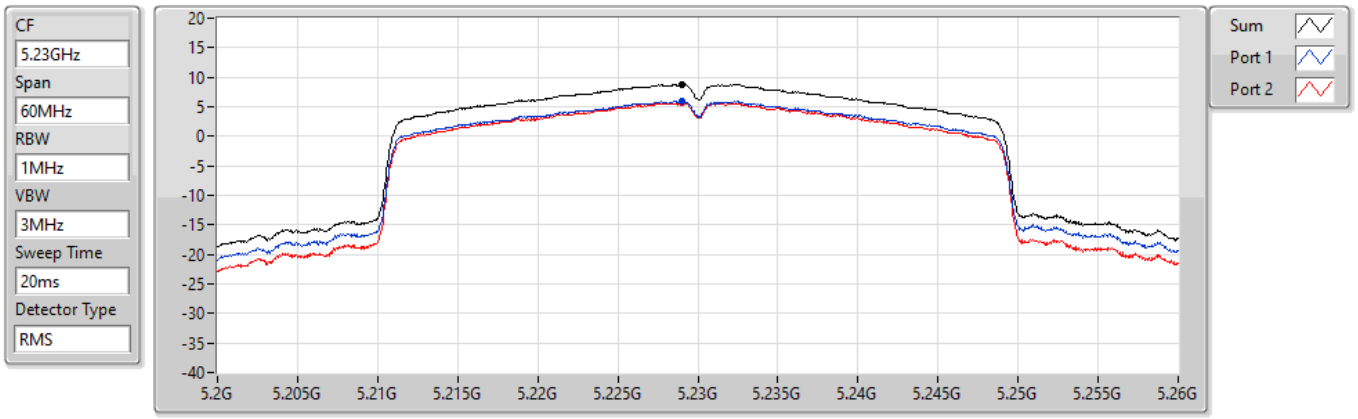

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.82	8.82	6.02	5.60

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5270MHz

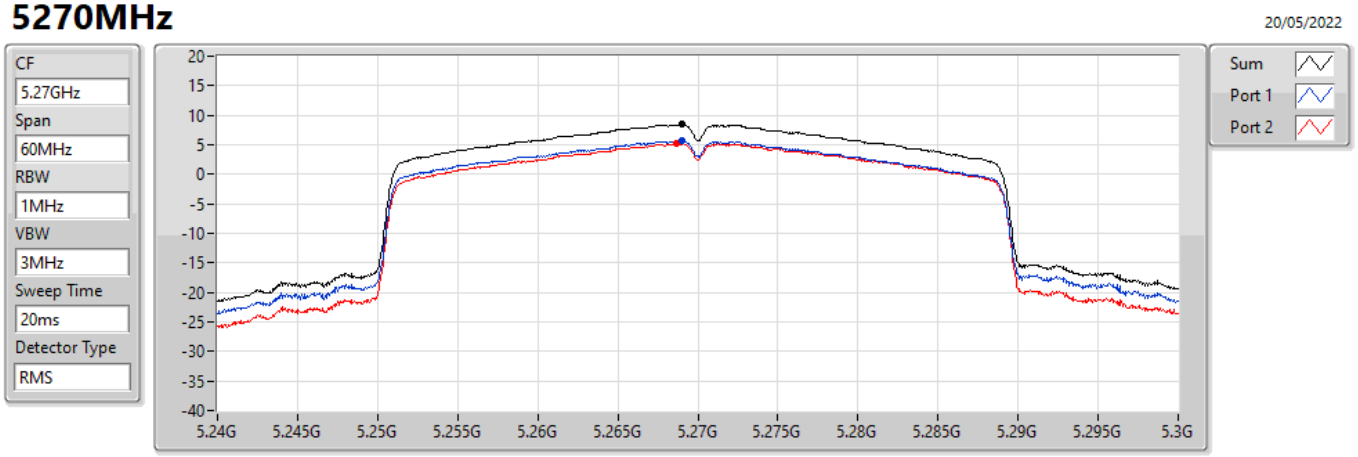

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.41	8.41	5.67	5.17

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5310MHz

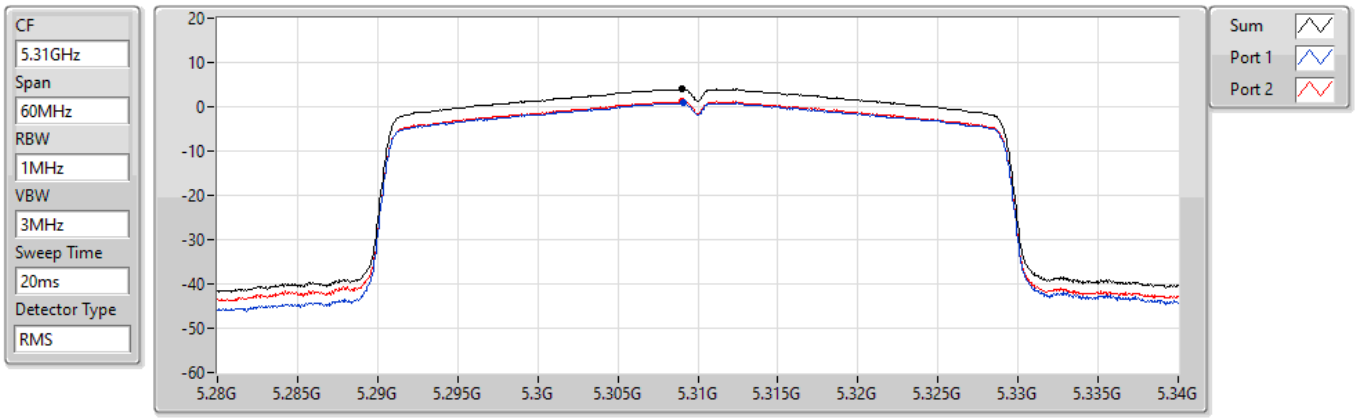

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.98	3.98	0.84	1.16

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5510MHz

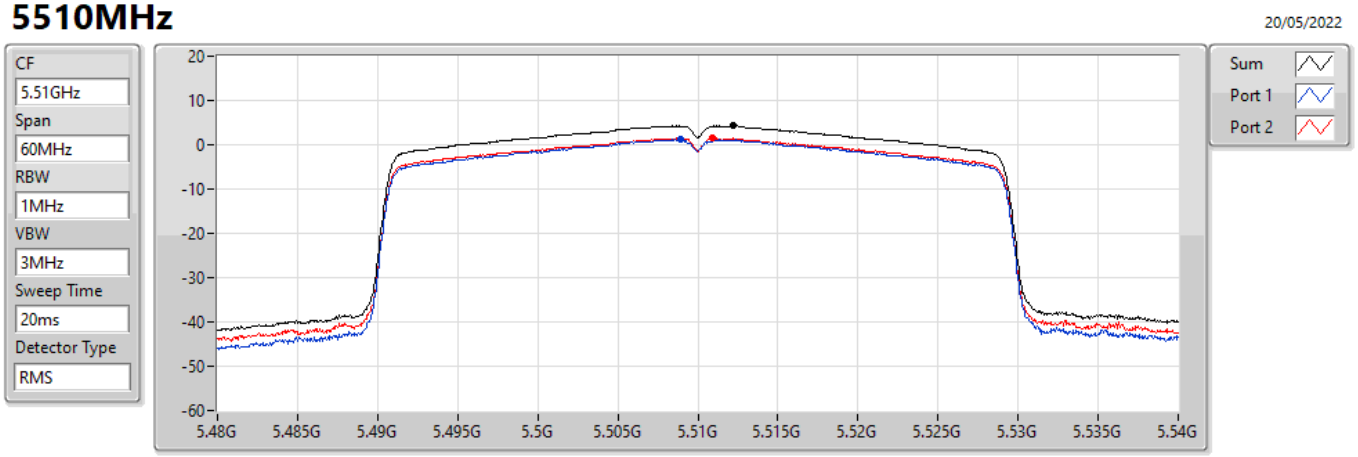

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.27	4.27	1.15	1.57

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5550MHz

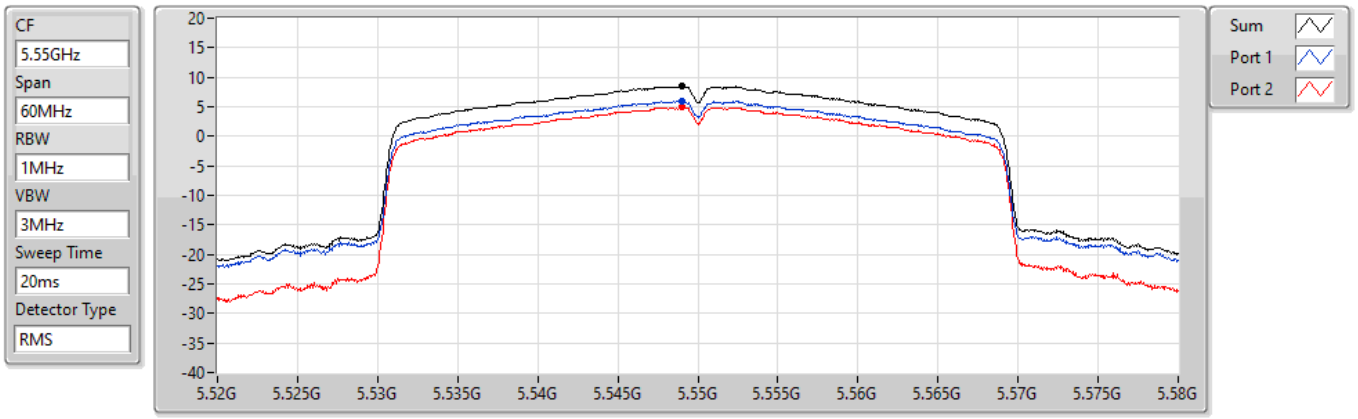

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.50	8.50	5.99	4.93

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5670MHz

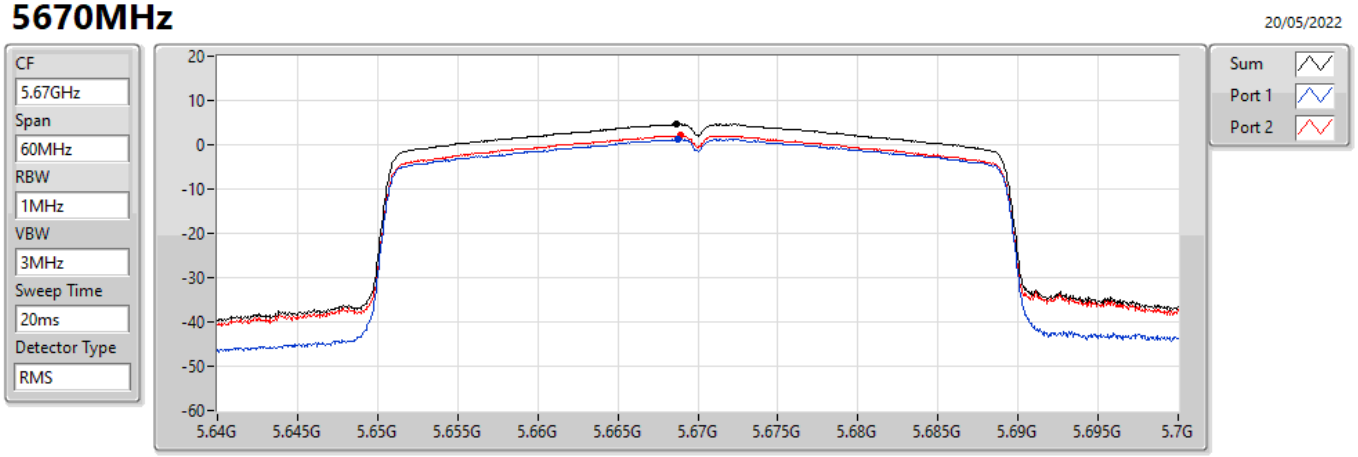

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
4.63	4.63	1.27	2.05

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5710MHz Straddle 5.47-5.725GHz

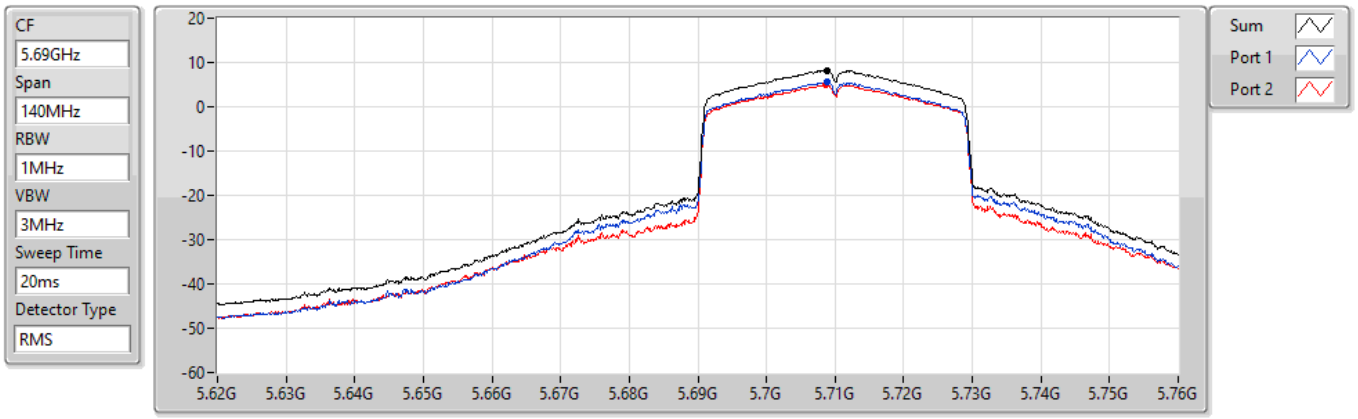

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.20	8.20	5.50	4.90

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5710MHz Straddle 5.725-5.85GHz

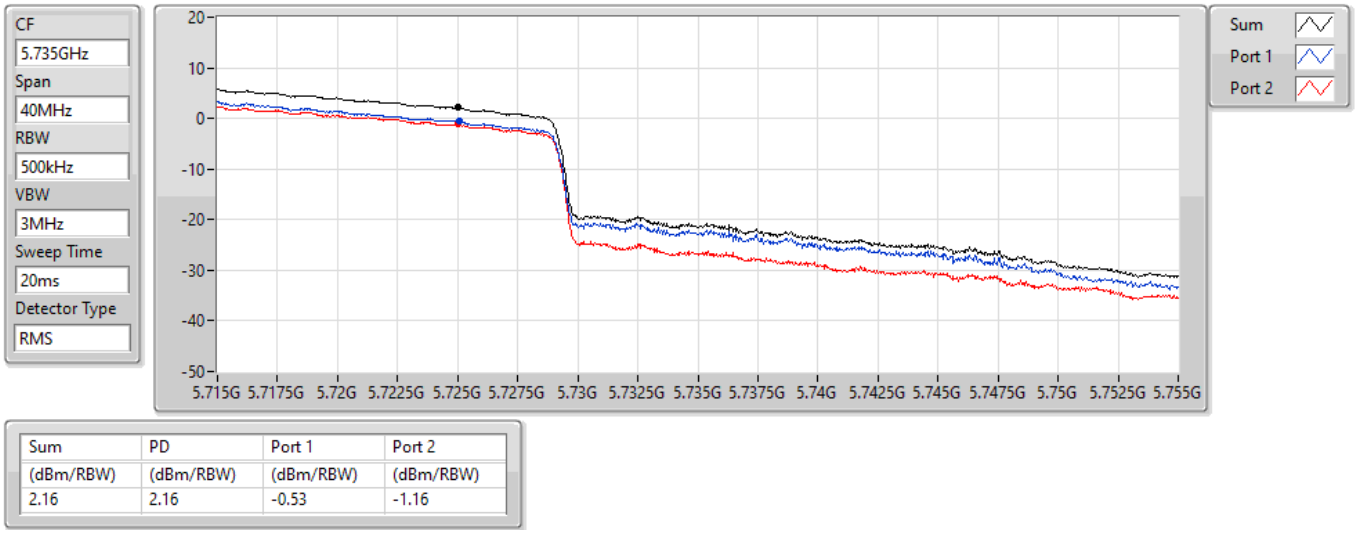

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.16	2.16	-0.53	-1.16

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5755MHz

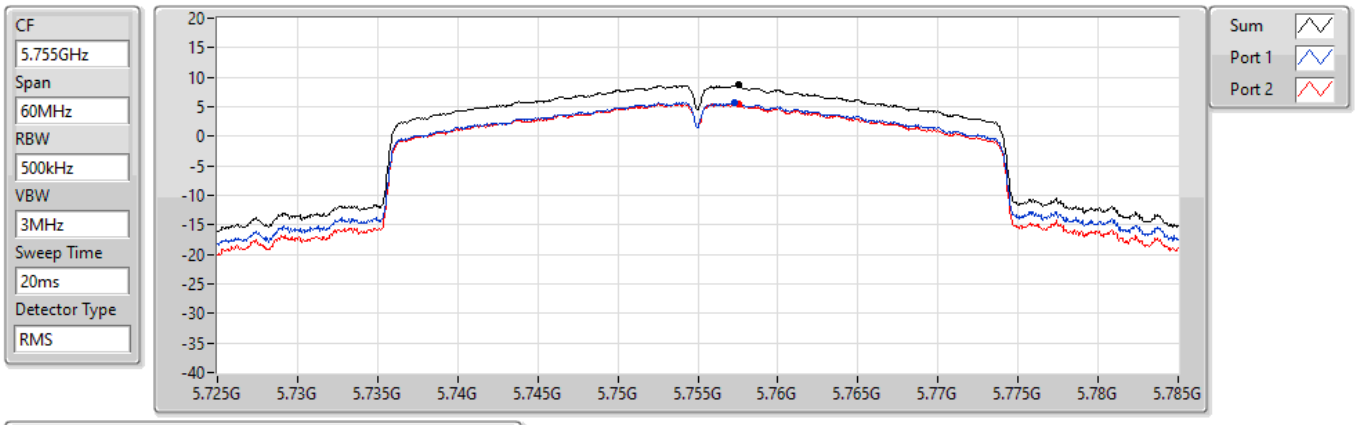

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.65	8.65	5.76	5.57

802.11ax HEW40_Nss1,(MCS0)_2TX PSD


5795MHz

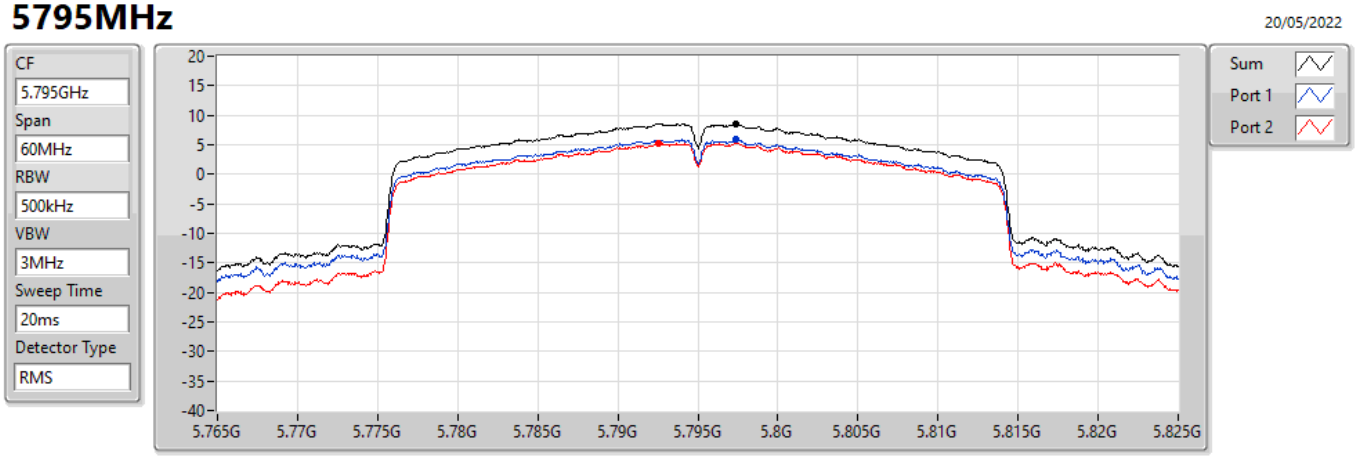

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.55	8.55	5.88	5.24

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5210MHz

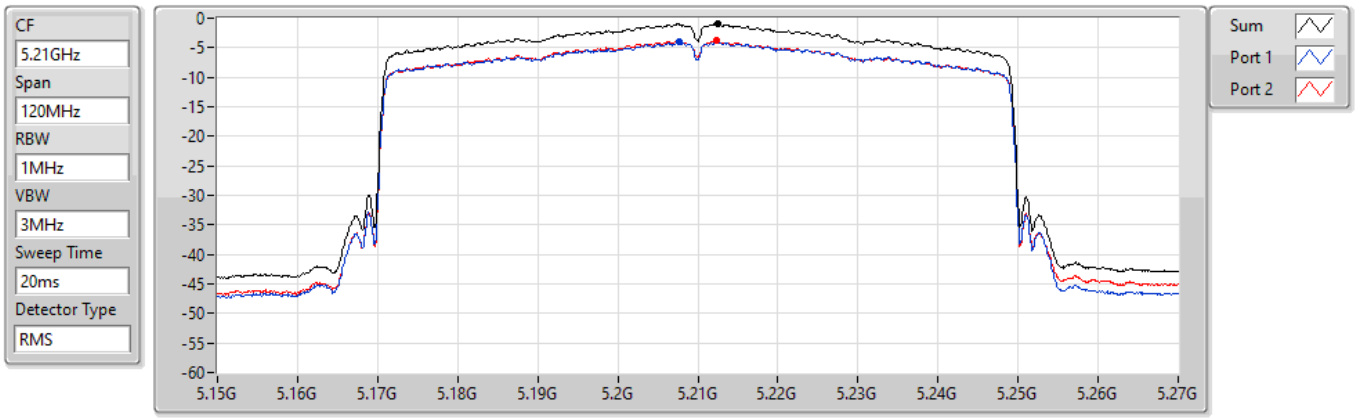

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.93	-0.93	-4.03	-3.75

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5290MHz

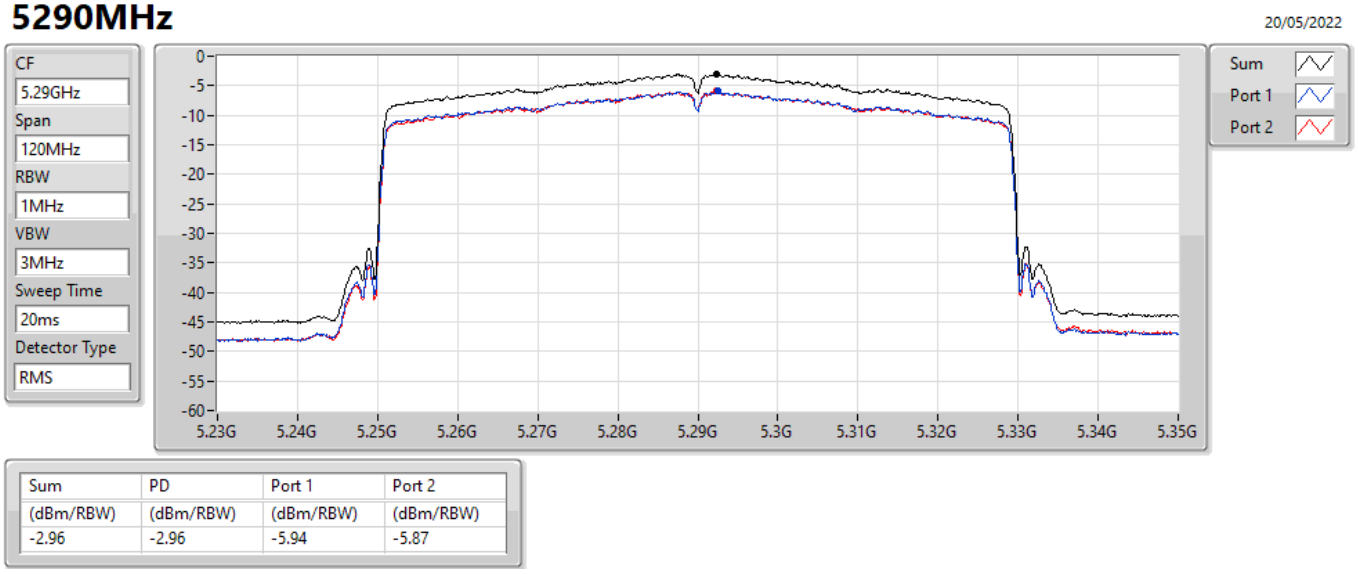

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.96	-2.96	-5.94	-5.87

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5530MHz

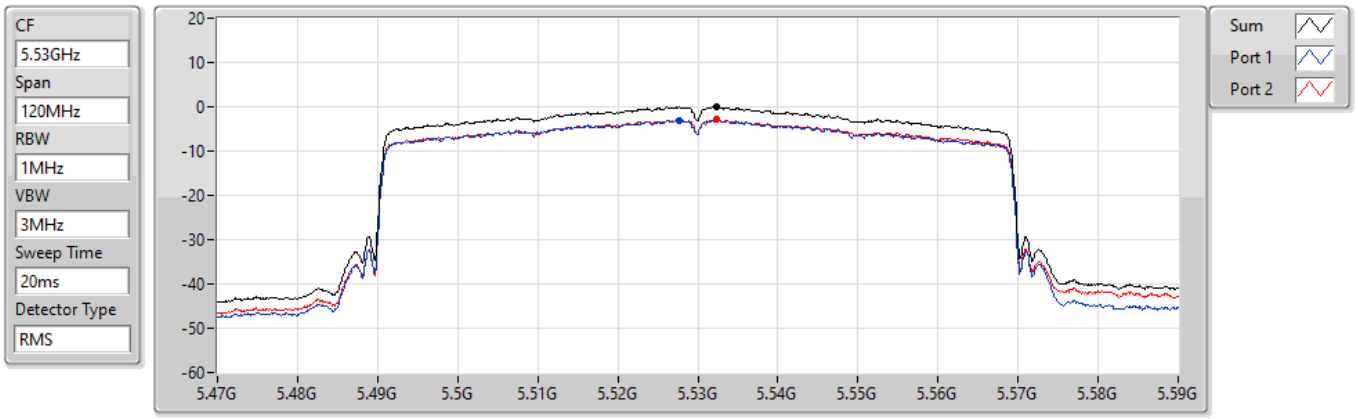

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.01	0.01	-3.03	-2.81

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5610MHz

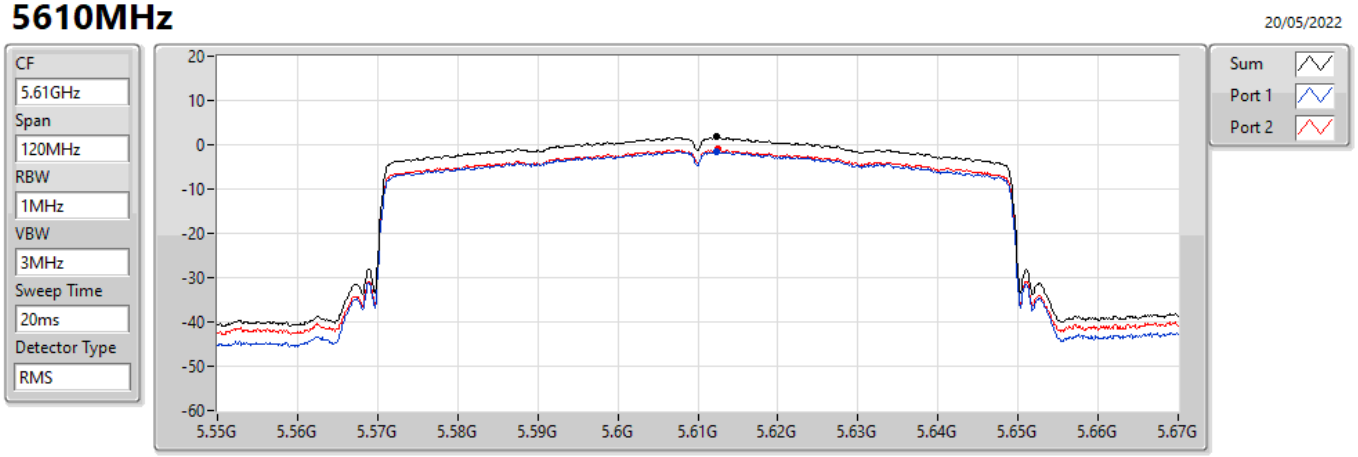

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
1.72	1.72	-1.47	-1.02

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5690MHz Straddle 5.47-5.725GHz

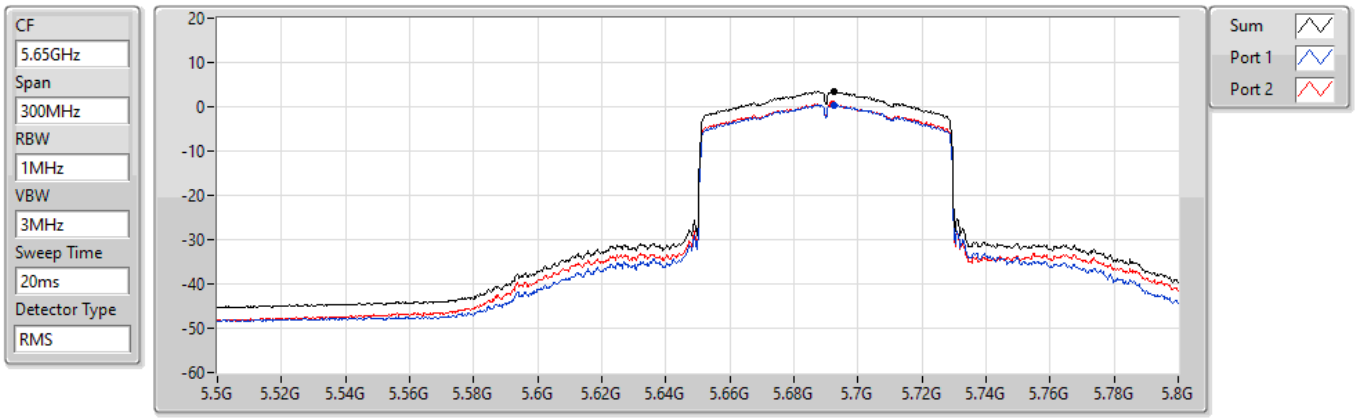

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.54	3.54	0.45	0.68

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5690MHz Straddle 5.725-5.85GHz

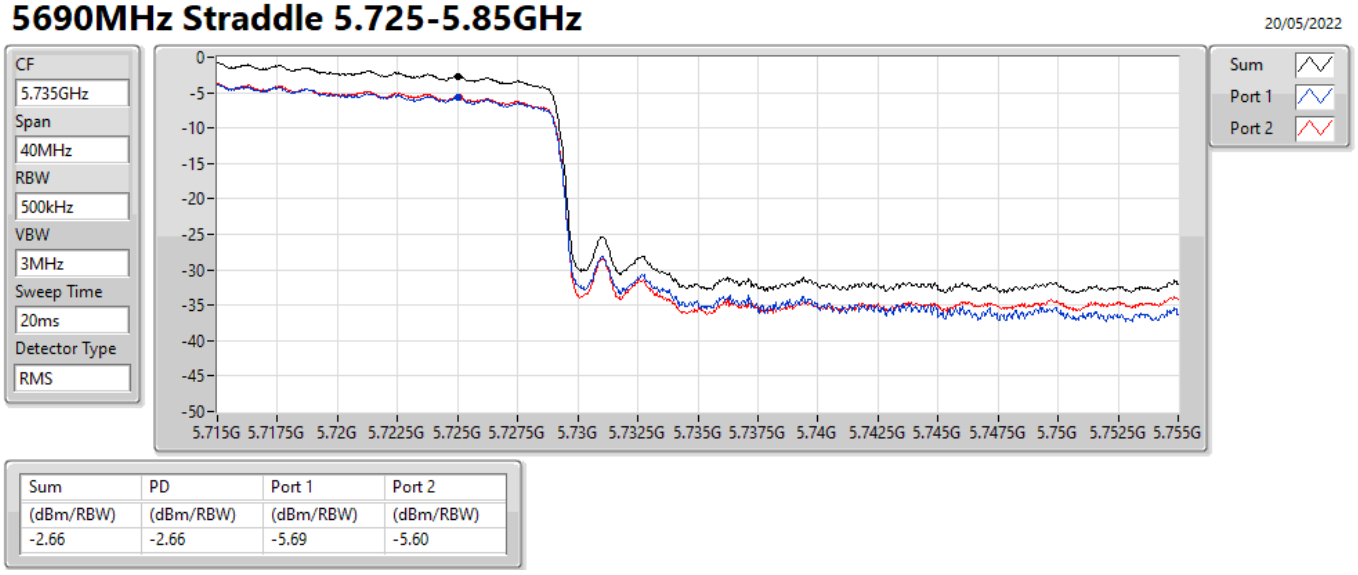

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.66	-2.66	-5.69	-5.60

802.11ax HEW80_Nss1,(MCS0)_2TX PSD


5775MHz

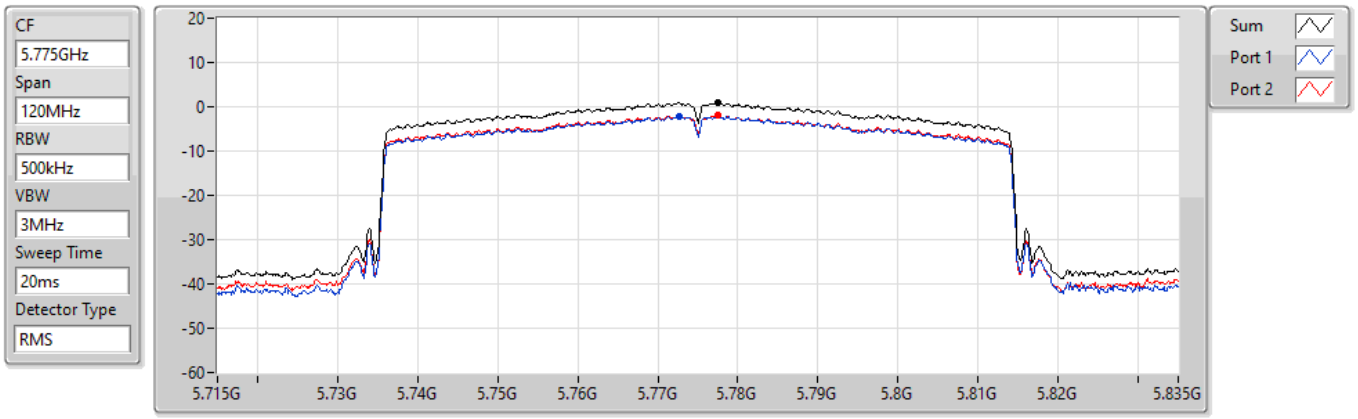

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
0.96	0.96	-2.21	-1.82

802.11ax HEW160_Nss1,(MCS0)_2TX PSD


5250MHz Straddle 5.15-5.25GHz

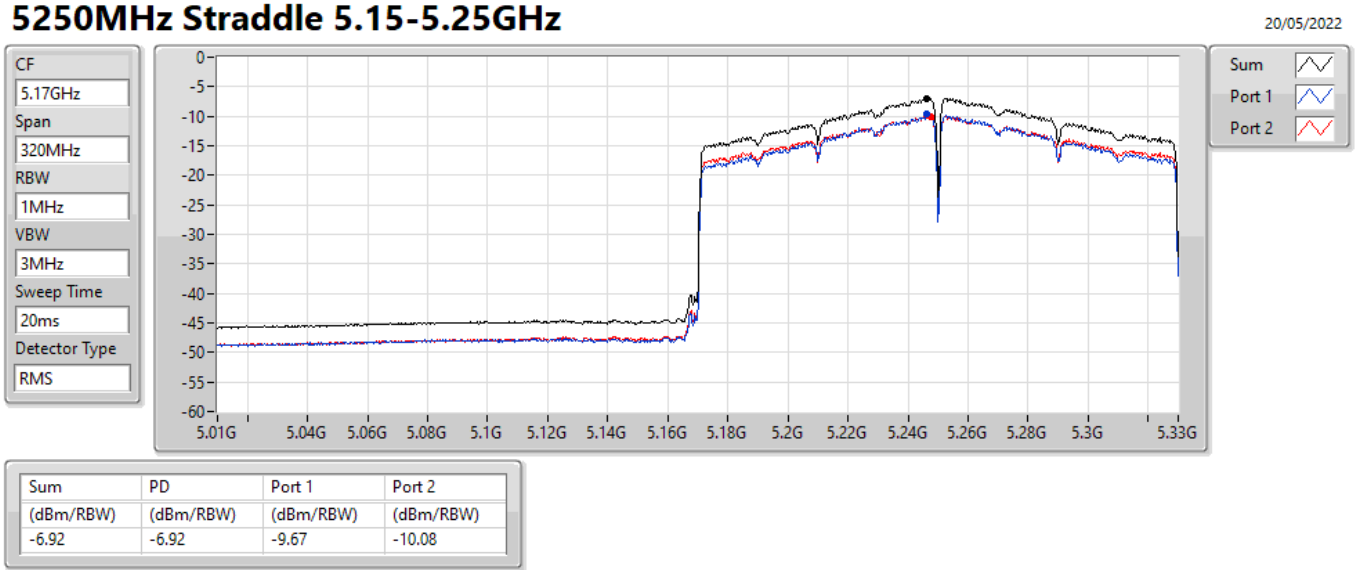

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.92	-6.92	-9.67	-10.08

802.11ax HEW160_Nss1,(MCS0)_2TX PSD


5250MHz Straddle 5.25-5.35GHz

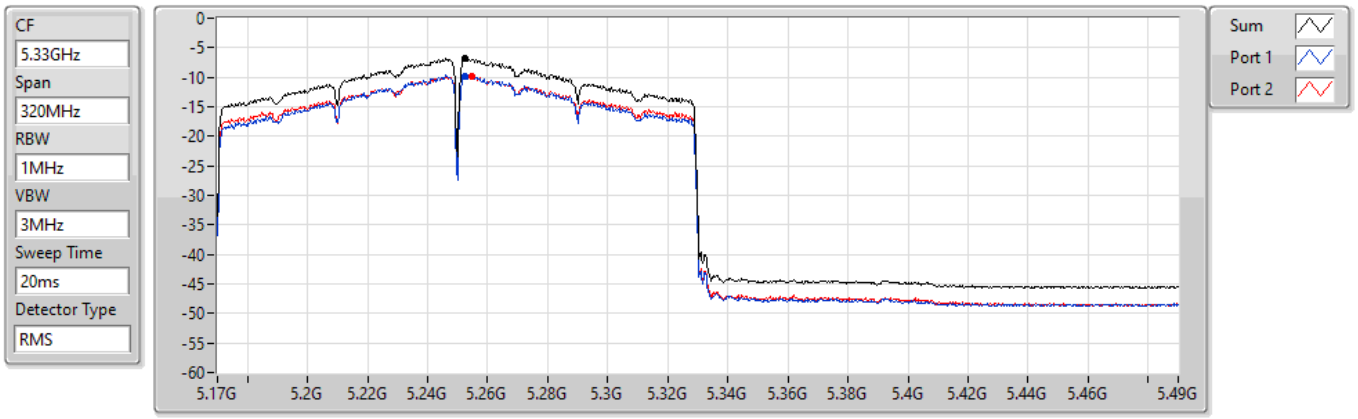

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.83	-6.83	-9.76	-9.91

802.11ax HEW160_Nss1,(MCS0)_2TX **PSD**

5570MHz

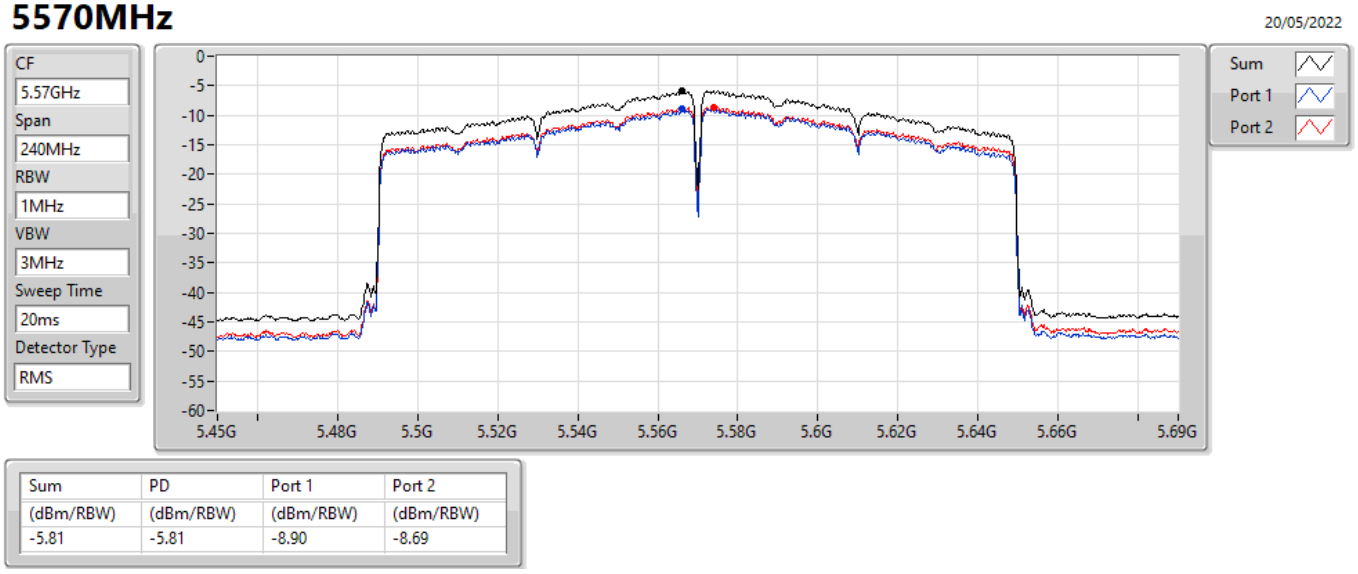

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.81	-5.81	-8.90	-8.69

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.82
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.99
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.92
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	13.37

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	4.86	10.78	10.78	11.00
5200MHz	Pass	4.86	10.80	10.80	11.00
5240MHz	Pass	4.86	10.82	10.82	11.00
5260MHz	Pass	4.86	10.93	10.93	11.00
5300MHz	Pass	4.86	10.77	10.77	11.00
5320MHz	Pass	4.86	10.99	10.99	11.00
5500MHz	Pass	4.86	10.88	10.88	11.00
5580MHz	Pass	4.86	10.92	10.92	11.00
5700MHz	Pass	4.86	10.89	10.89	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.86	10.81	10.81	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.86	-13.12	-13.12	30.00
5745MHz	Pass	4.86	13.37	13.37	30.00
5785MHz	Pass	4.86	12.12	12.12	30.00
5825MHz	Pass	4.86	11.97	11.97	30.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5180MHz

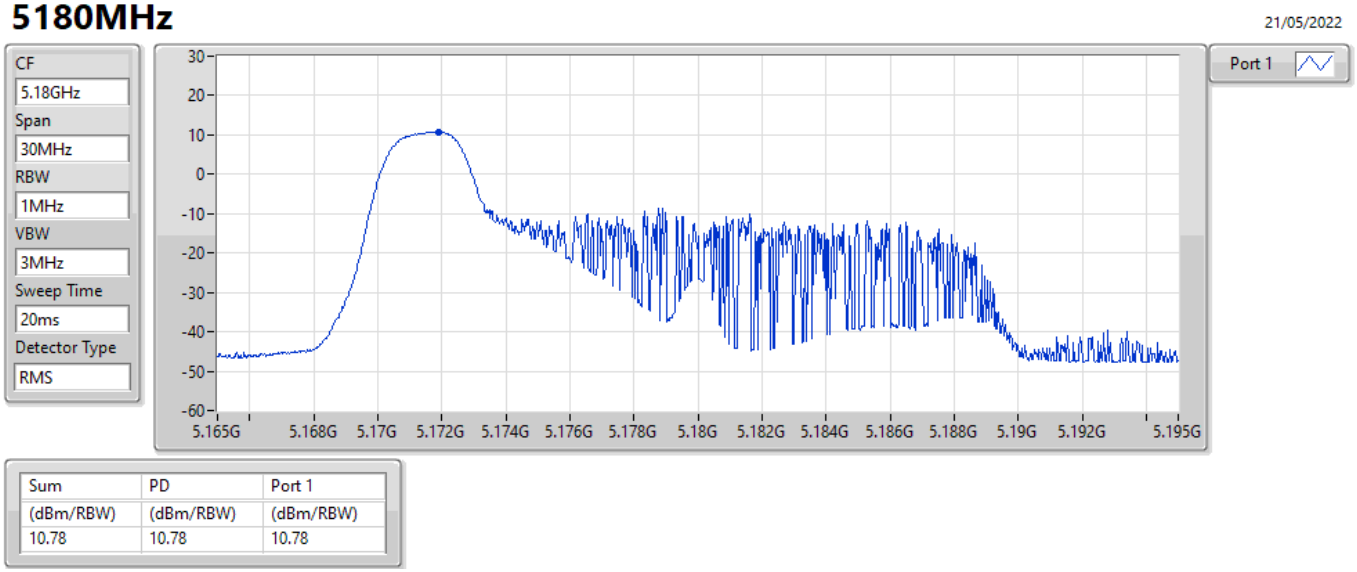

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.78	10.78	10.78

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5200MHz

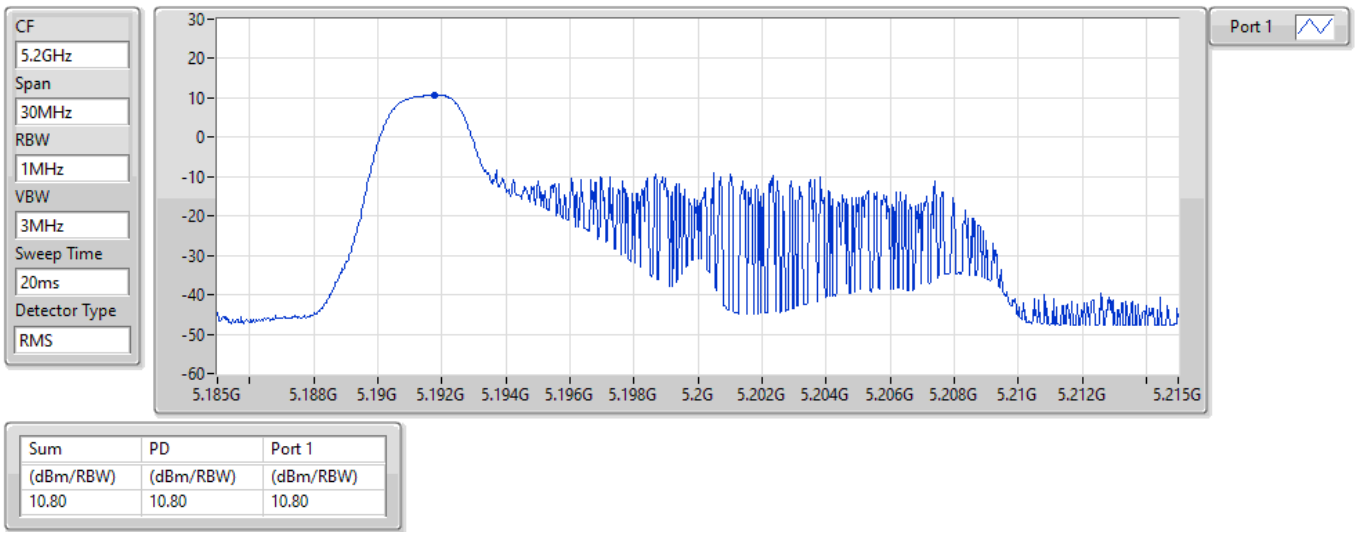

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.80	10.80	10.80

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5240MHz

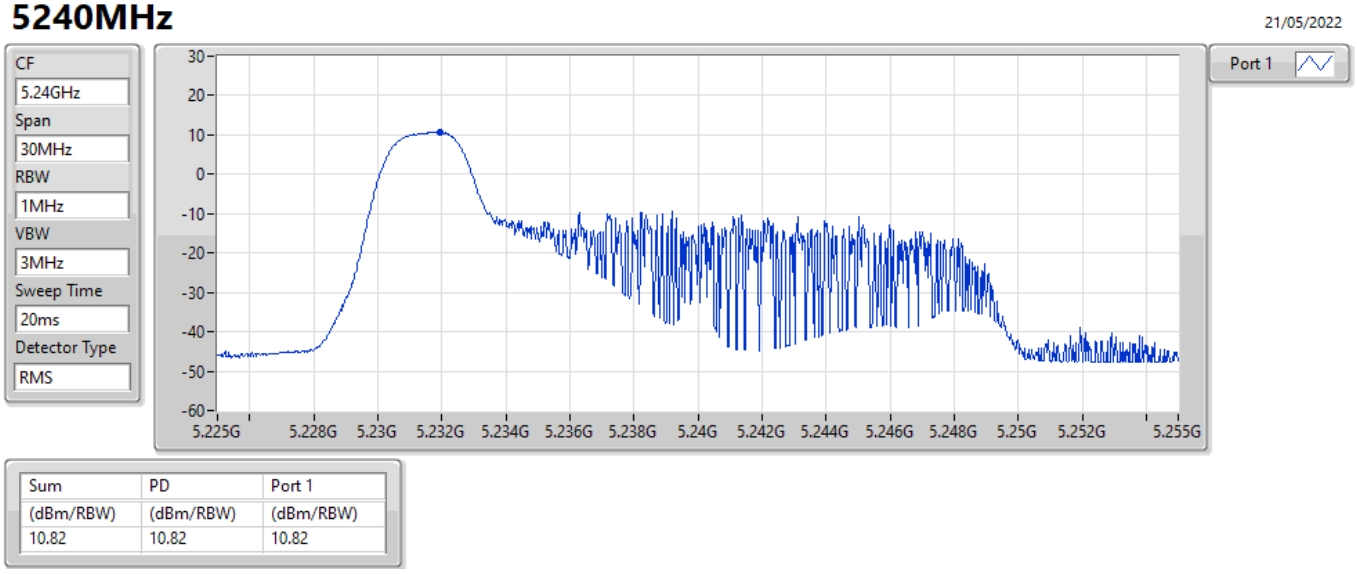

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.82	10.82	10.82

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5260MHz

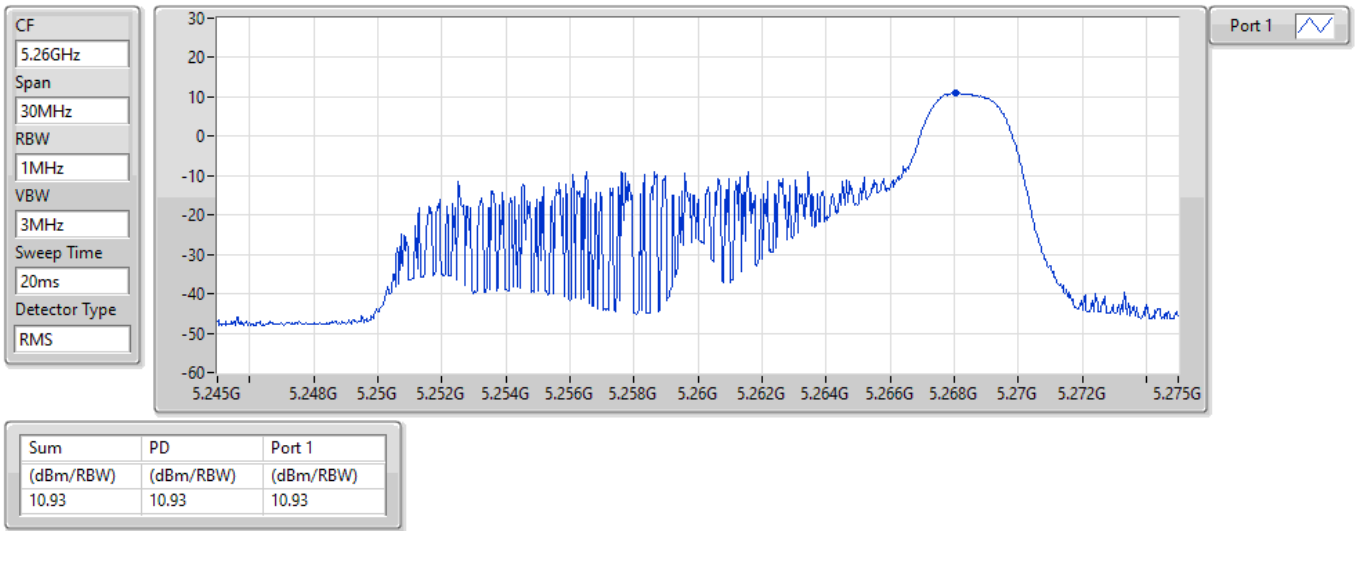

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.93	10.93	10.93

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5300MHz

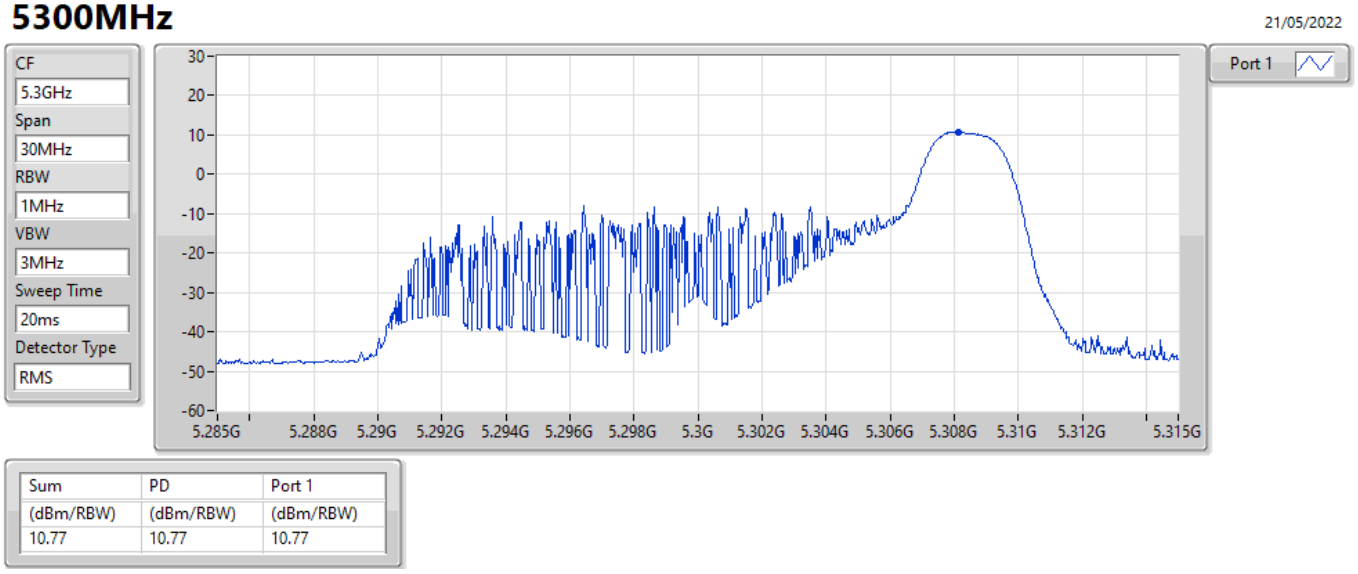

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.77	10.77	10.77

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5320MHz

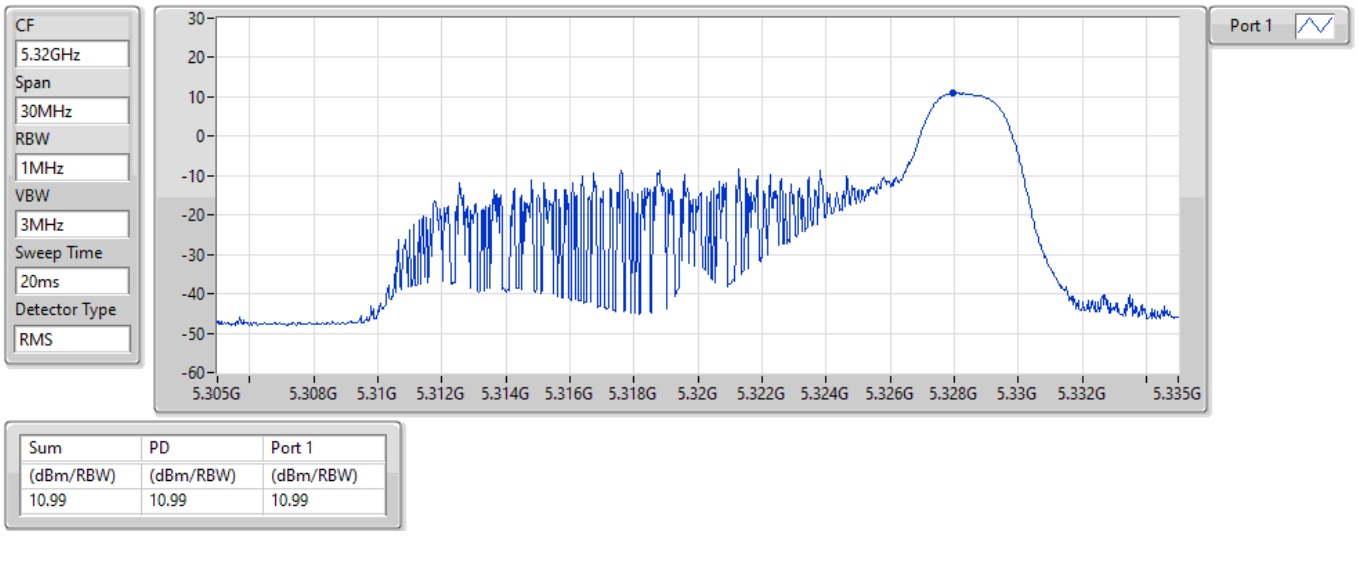

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.99	10.99	10.99

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5500MHz

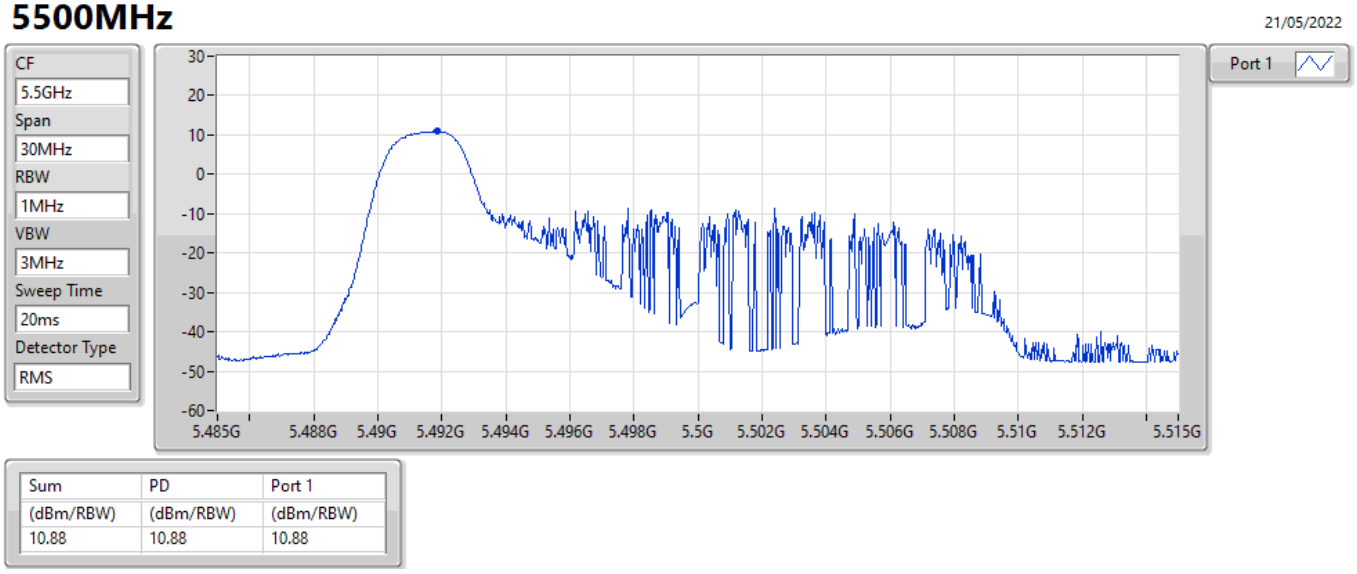

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.88	10.88	10.88

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5580MHz

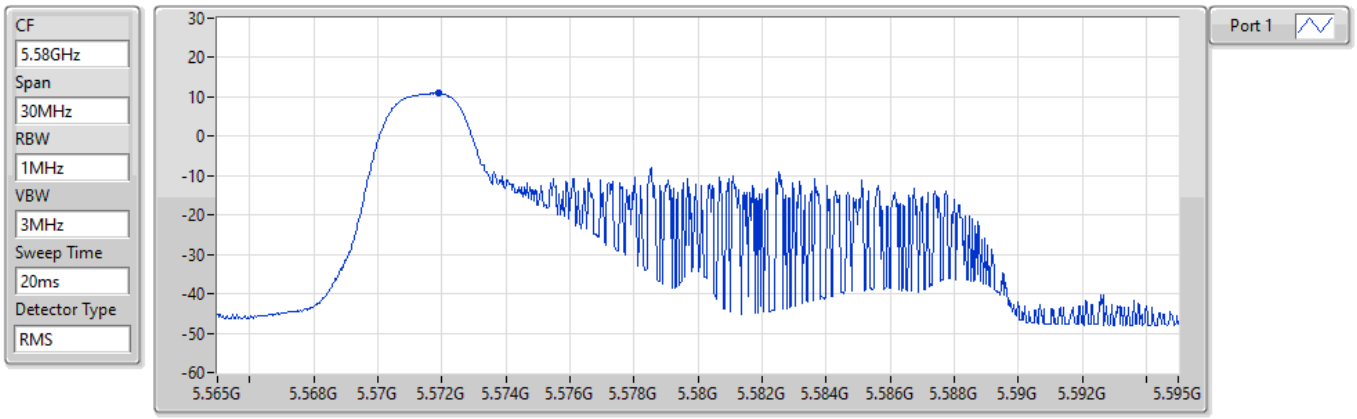

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.92	10.92	10.92

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5700MHz

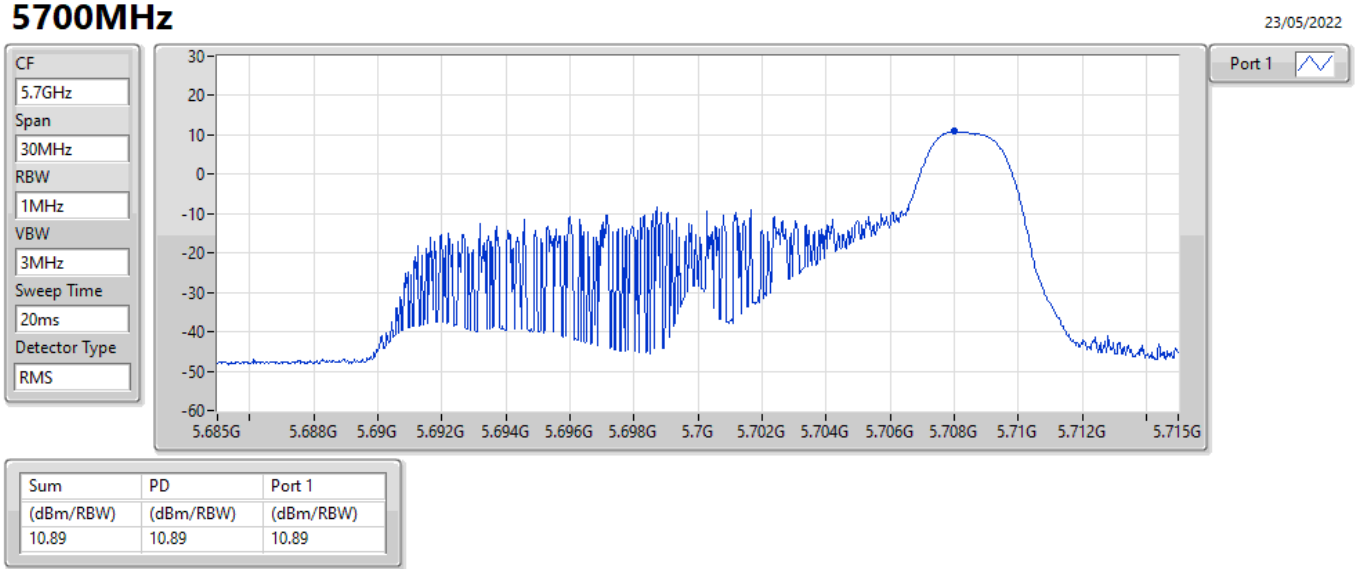

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.89	10.89	10.89

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.47-5.725GHz

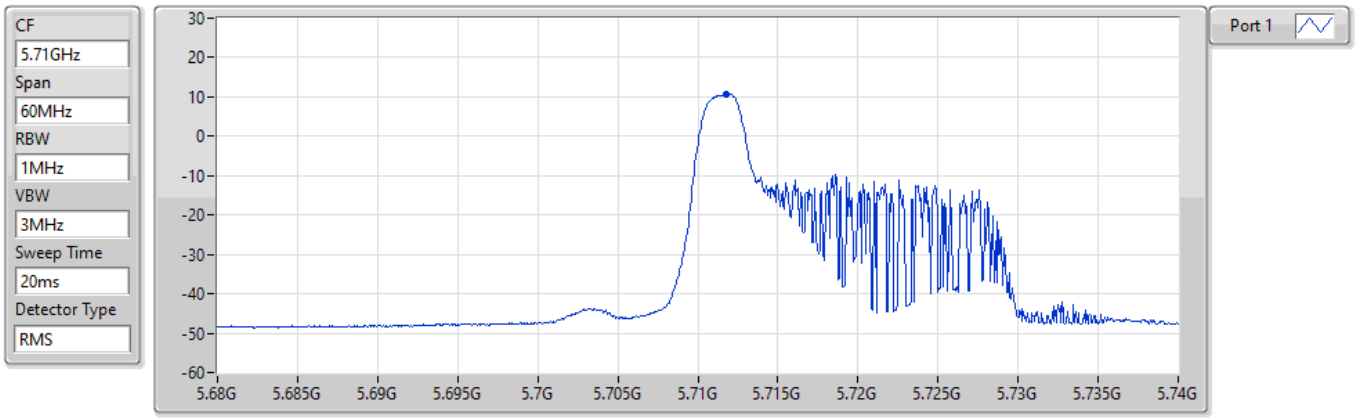

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.81	10.81	10.81

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.725-5.85GHz

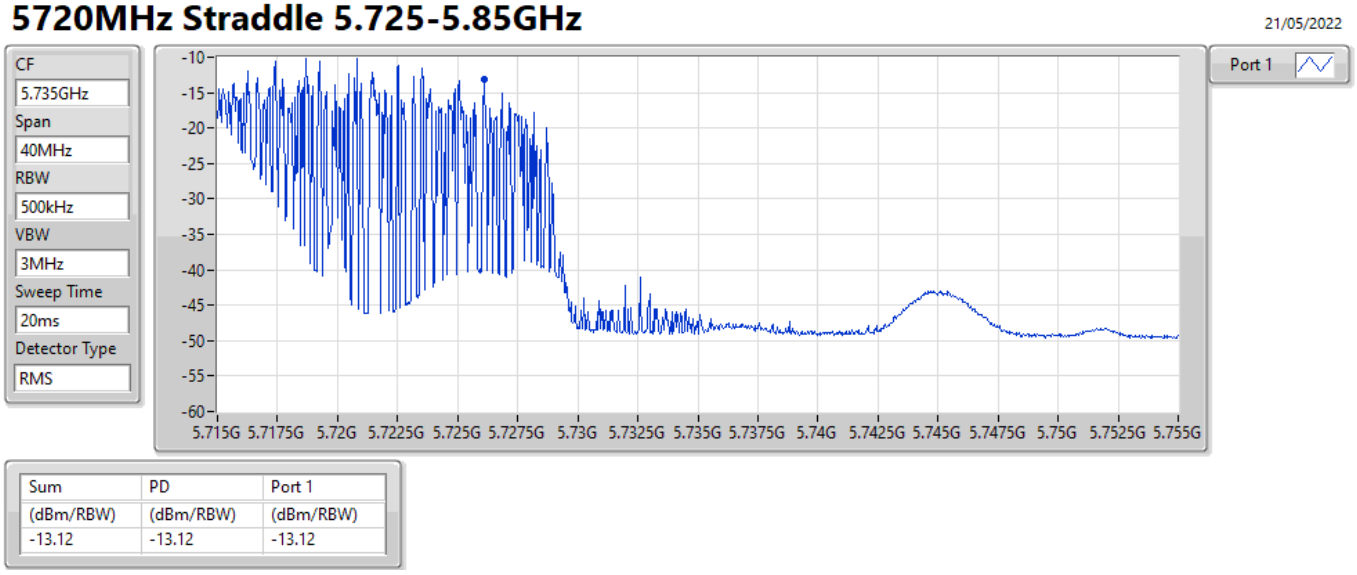

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.12	-13.12	-13.12

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5745MHz

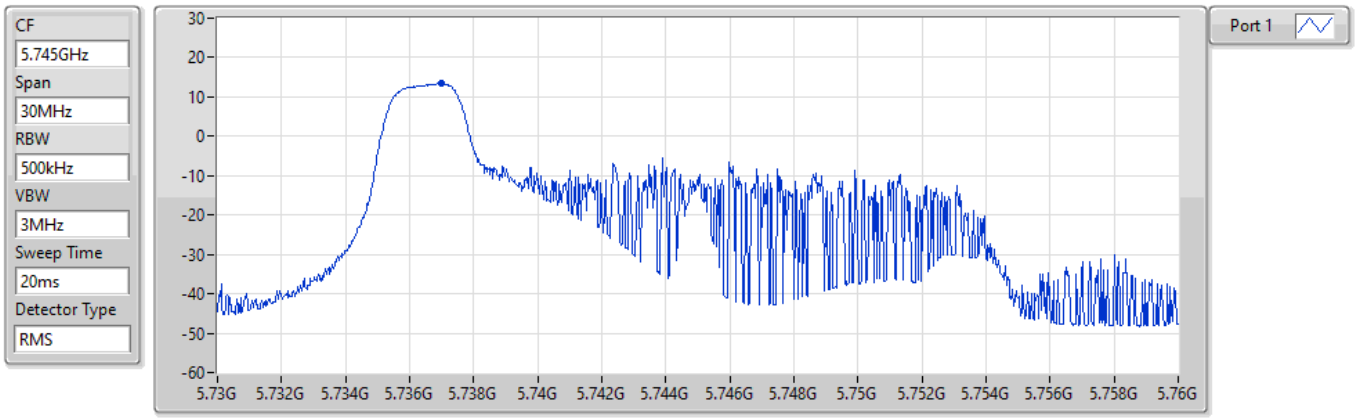

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.37	13.37	13.37

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5785MHz

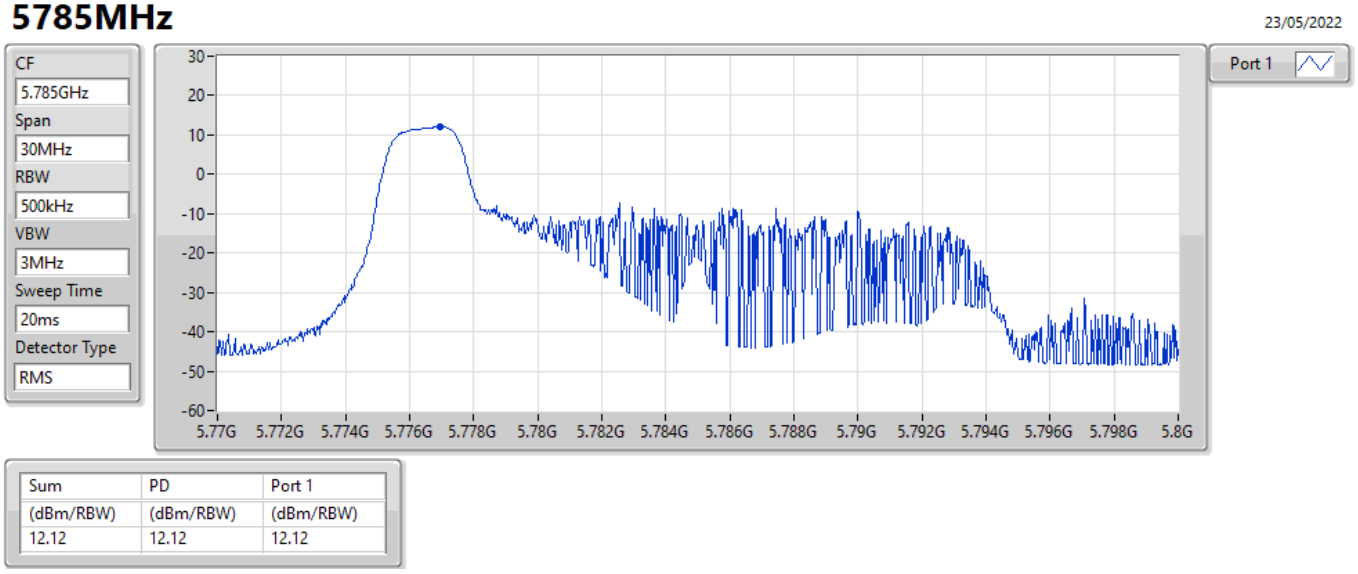

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.12	12.12	12.12

802.11ax HEW20_Nss1,(MCS0)_1TX PSD

5825MHz

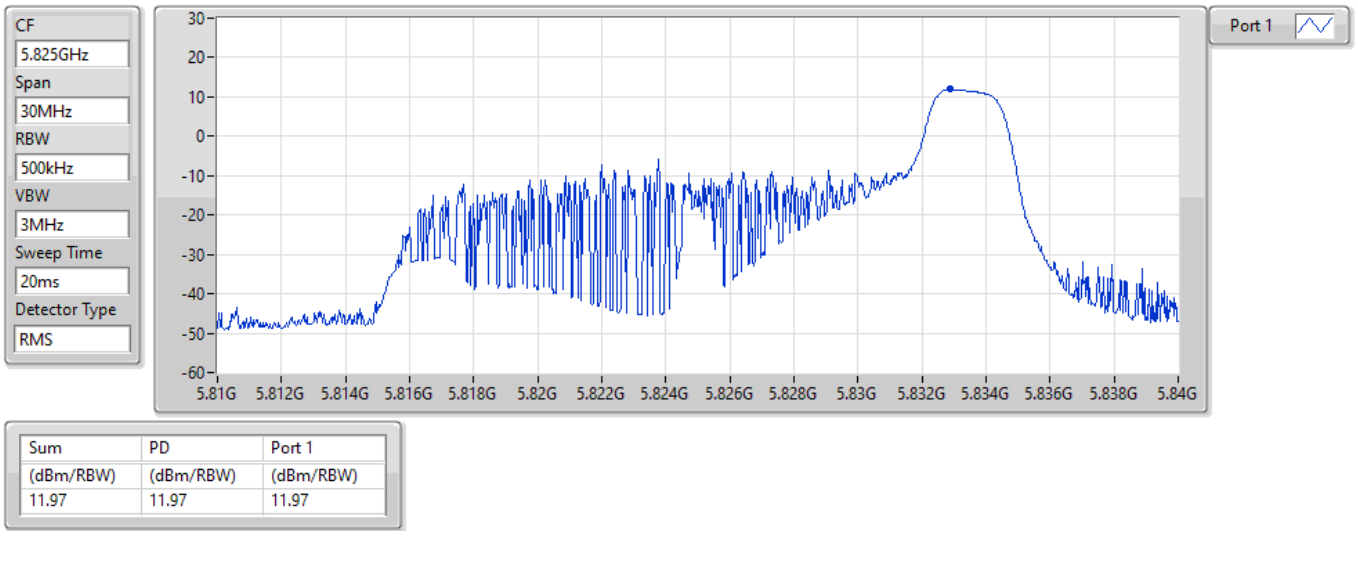

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.97	11.97	11.97

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.97
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.92
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.98
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	13.65

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	4.86	10.92	10.92	11.00
5200MHz	Pass	4.86	10.94	10.94	11.00
5240MHz	Pass	4.86	10.97	10.97	11.00
5260MHz	Pass	4.86	10.88	10.88	11.00
5300MHz	Pass	4.86	10.82	10.82	11.00
5320MHz	Pass	4.86	10.92	10.92	11.00
5500MHz	Pass	4.86	10.90	10.90	11.00
5580MHz	Pass	4.86	10.97	10.97	11.00
5700MHz	Pass	4.86	10.89	10.89	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.86	10.98	10.98	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.86	-0.33	-0.33	30.00
5745MHz	Pass	4.86	13.65	13.65	30.00
5785MHz	Pass	4.86	13.45	13.45	30.00
5825MHz	Pass	4.86	12.80	12.80	30.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5180MHz

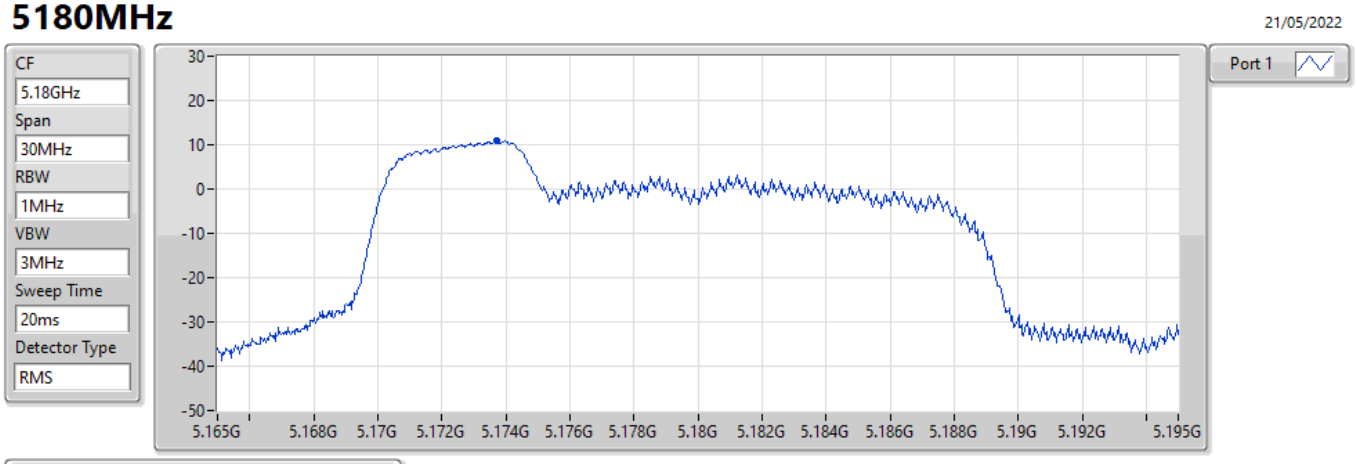

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.92	10.92	10.92

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5200MHz

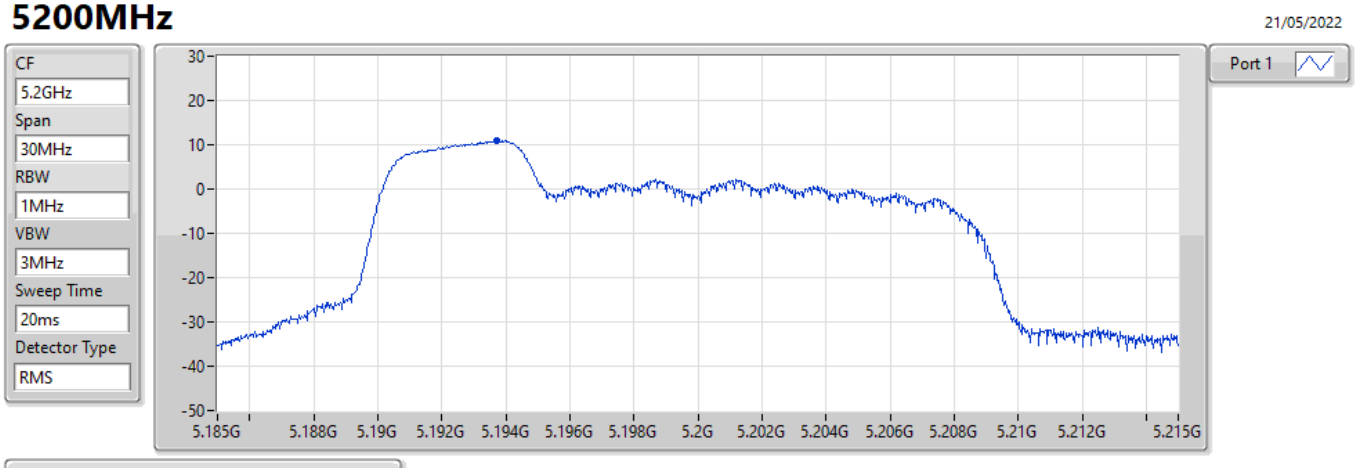

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.94	10.94	10.94

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5240MHz

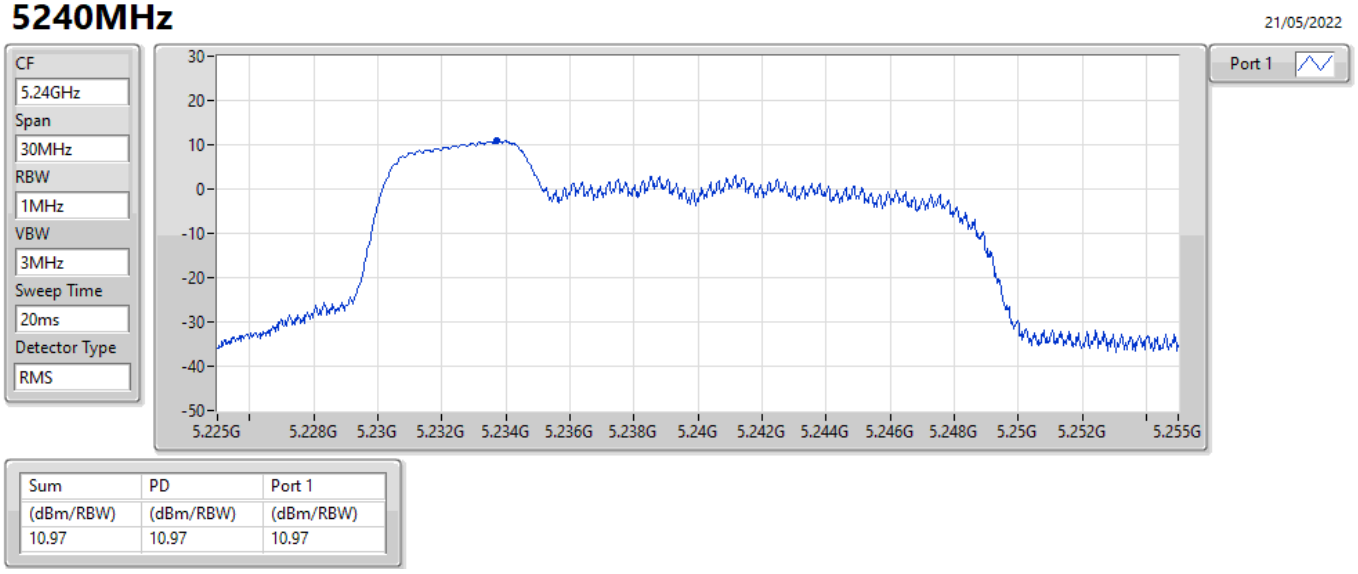

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.97	10.97	10.97

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5260MHz

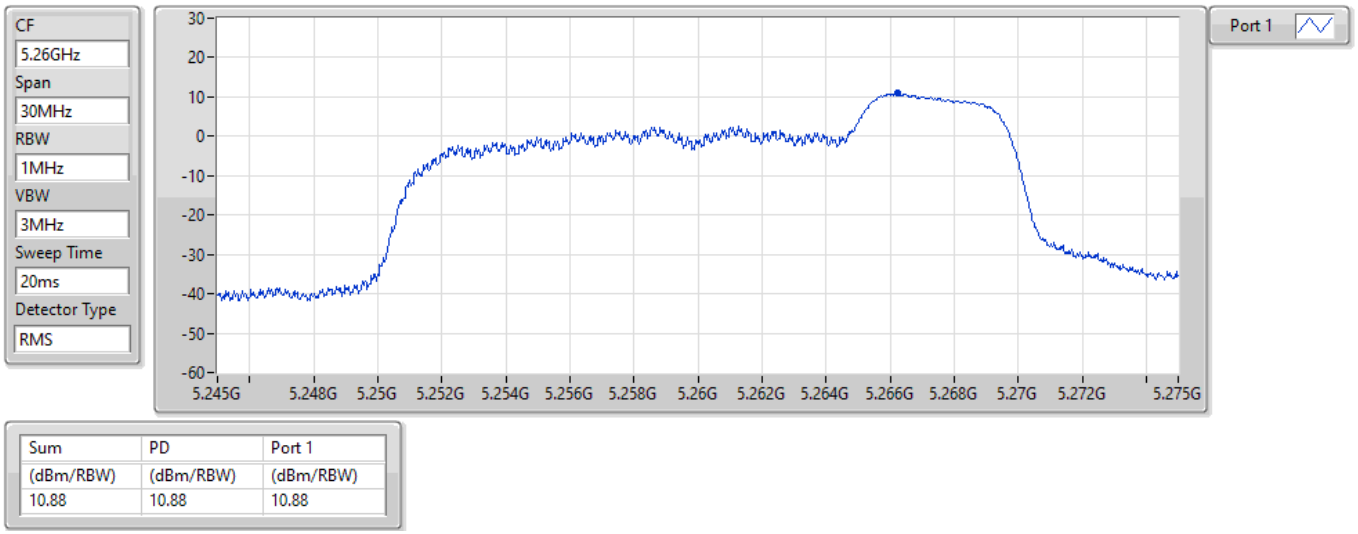

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.88	10.88	10.88

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5300MHz

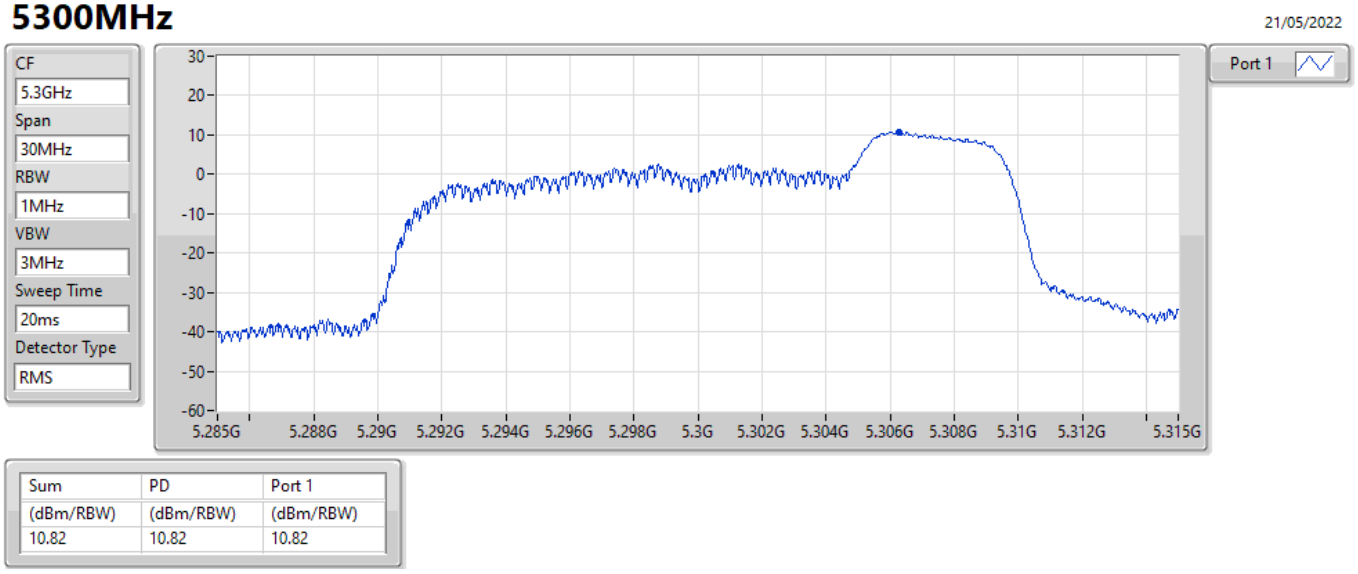

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.82	10.82	10.82

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5320MHz

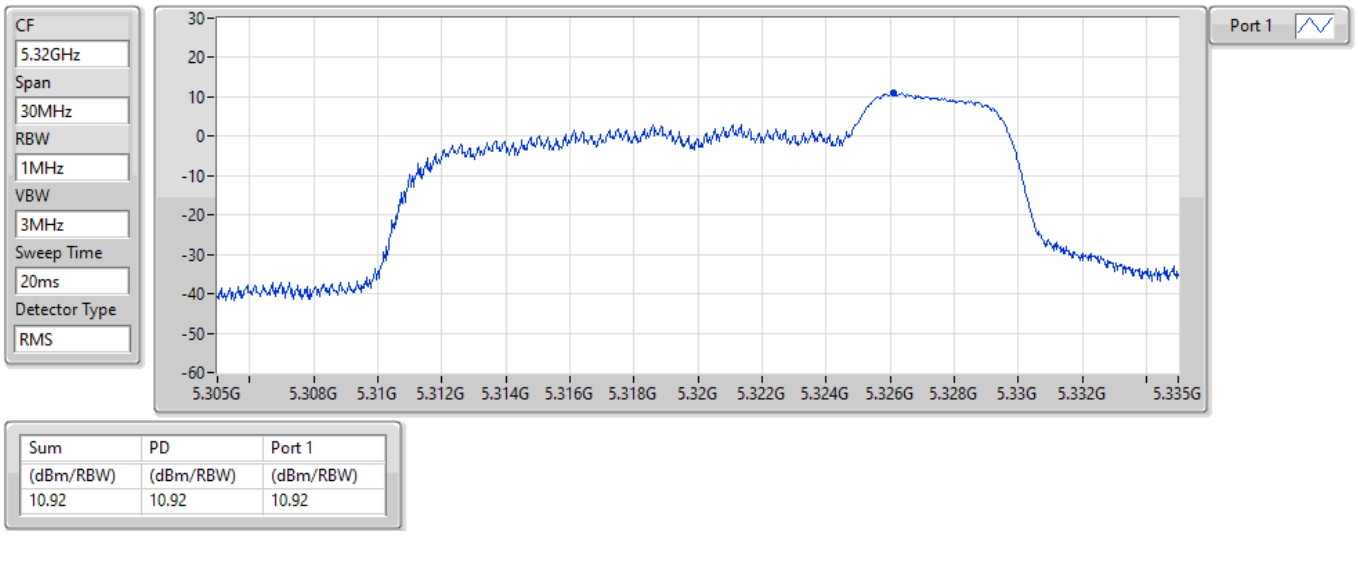

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.92	10.92	10.92

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5500MHz

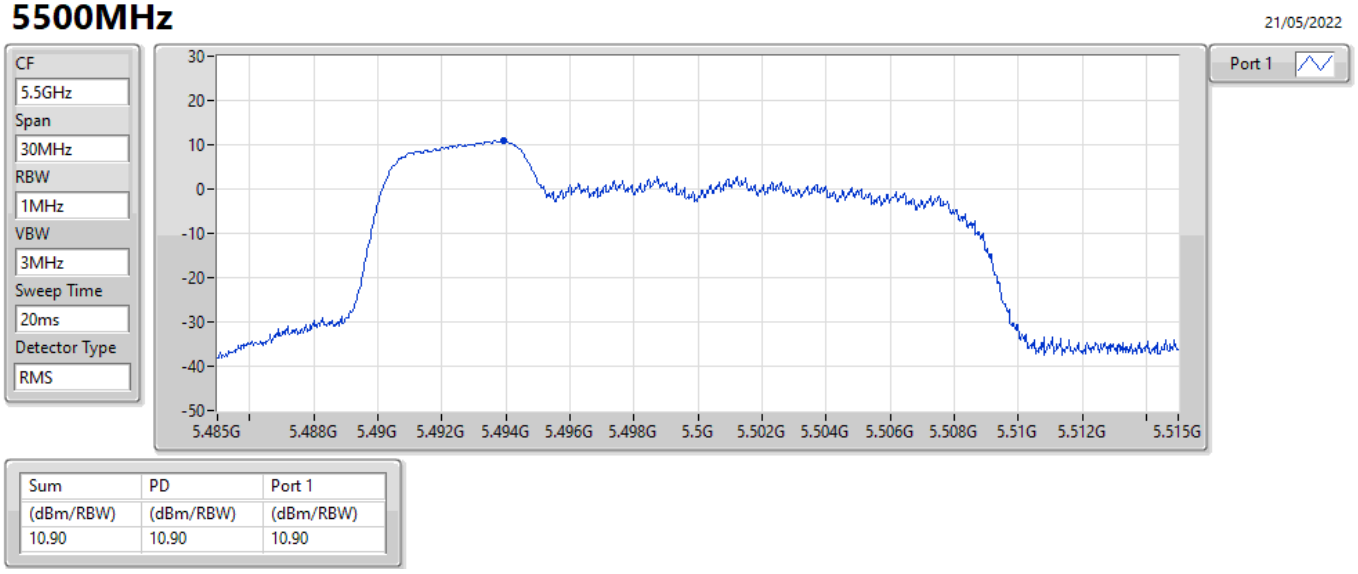

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.90	10.90	10.90

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5580MHz

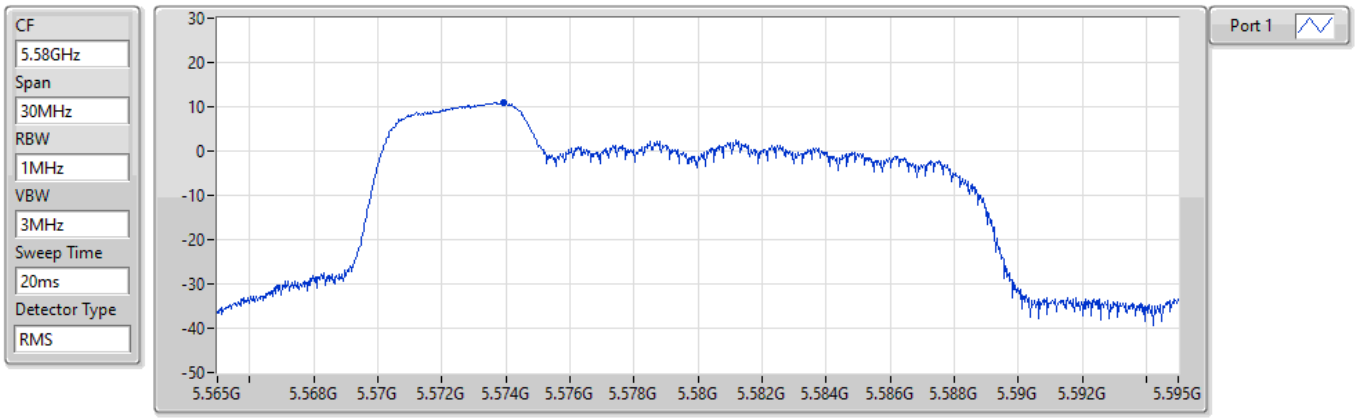

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.97	10.97	10.97

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5700MHz

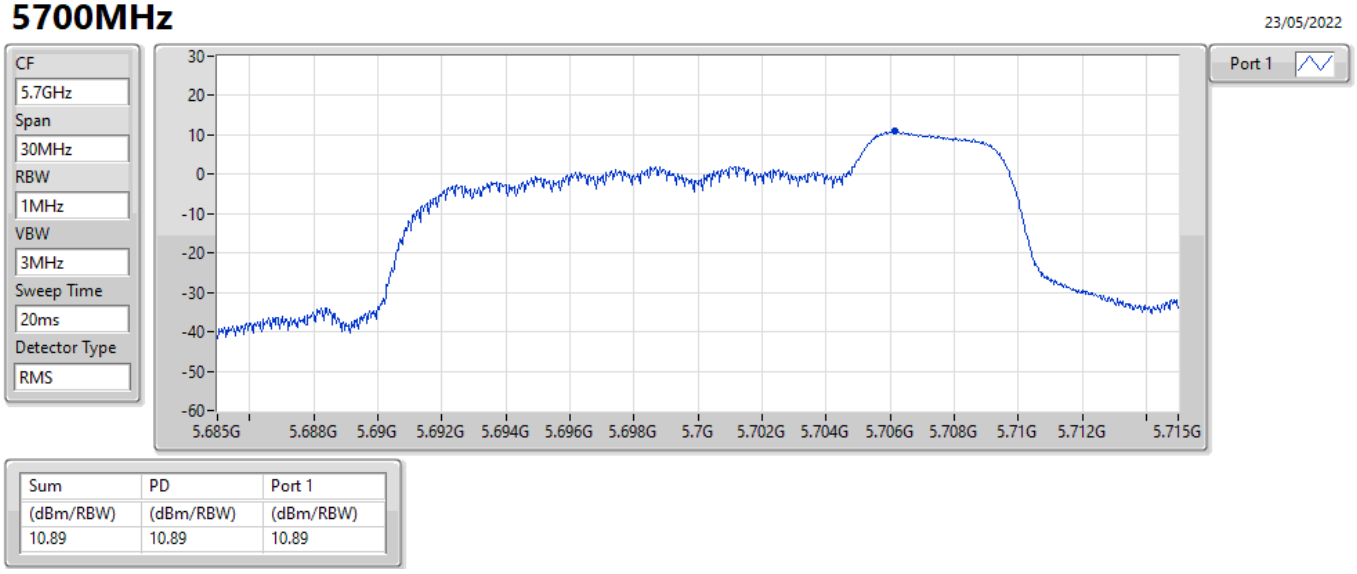

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.89	10.89	10.89

802.11ax HEW20_Nss1,(MCS0)_1TX PSD

5720MHz Straddle 5.47-5.725GHz

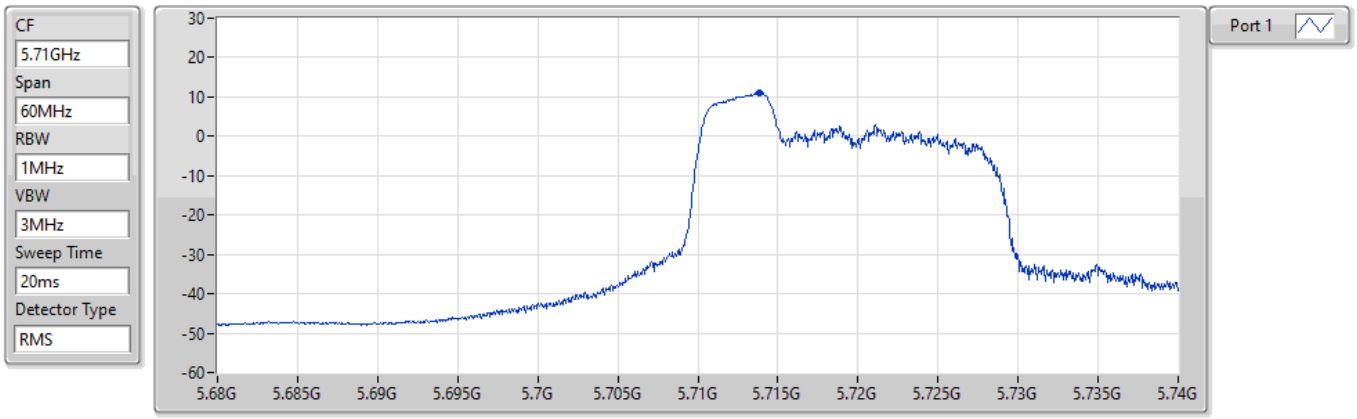


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.98	10.98	10.98

802.11ax HEW20_Nss1,(MCS0)_1TX **PSD**

5720MHz Straddle 5.725-5.85GHz

21/05/2022

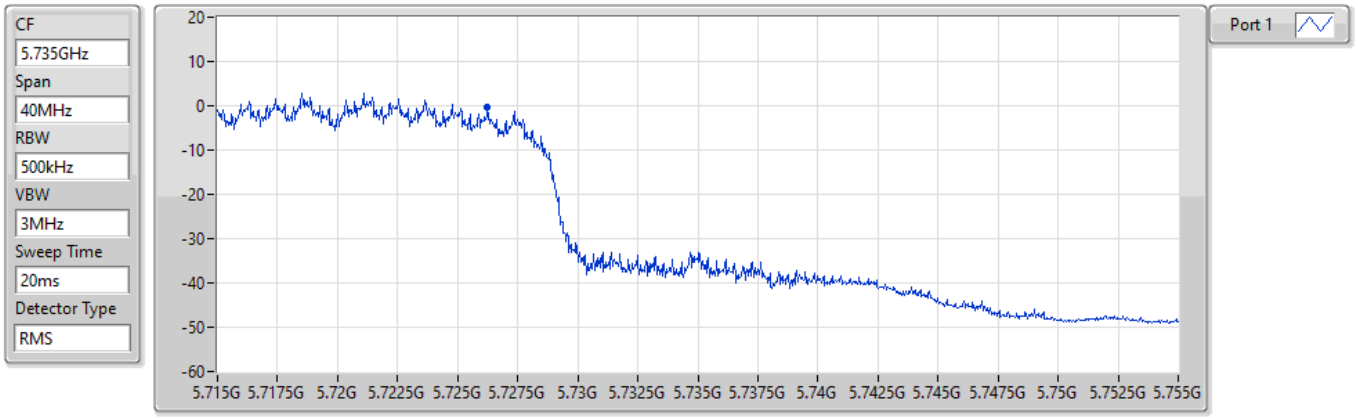


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.33	-0.33	-0.33

802.11ax HEW20_Nss1,(MCS0)_1TX **PSD**

5745MHz


23/05/2022

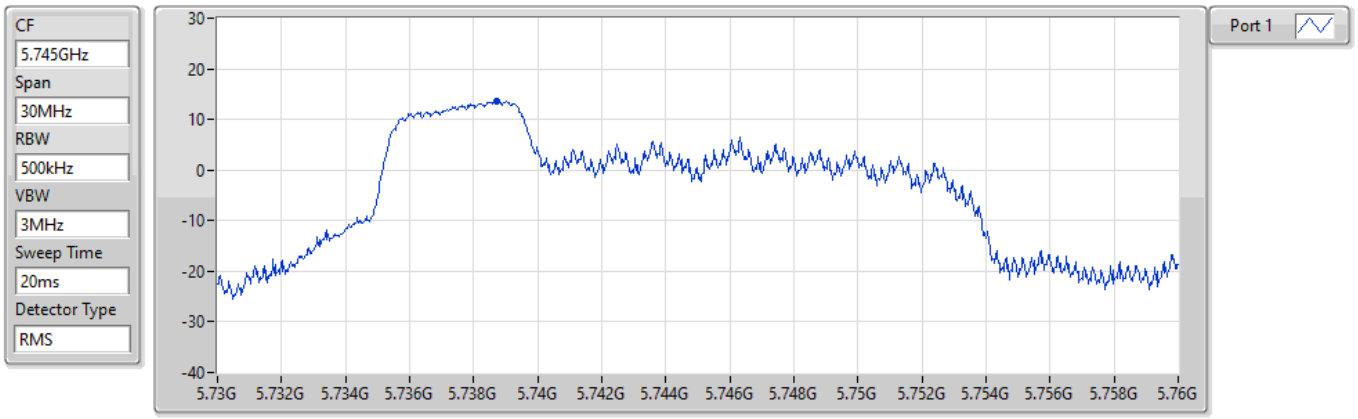

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.65	13.65	13.65

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5785MHz

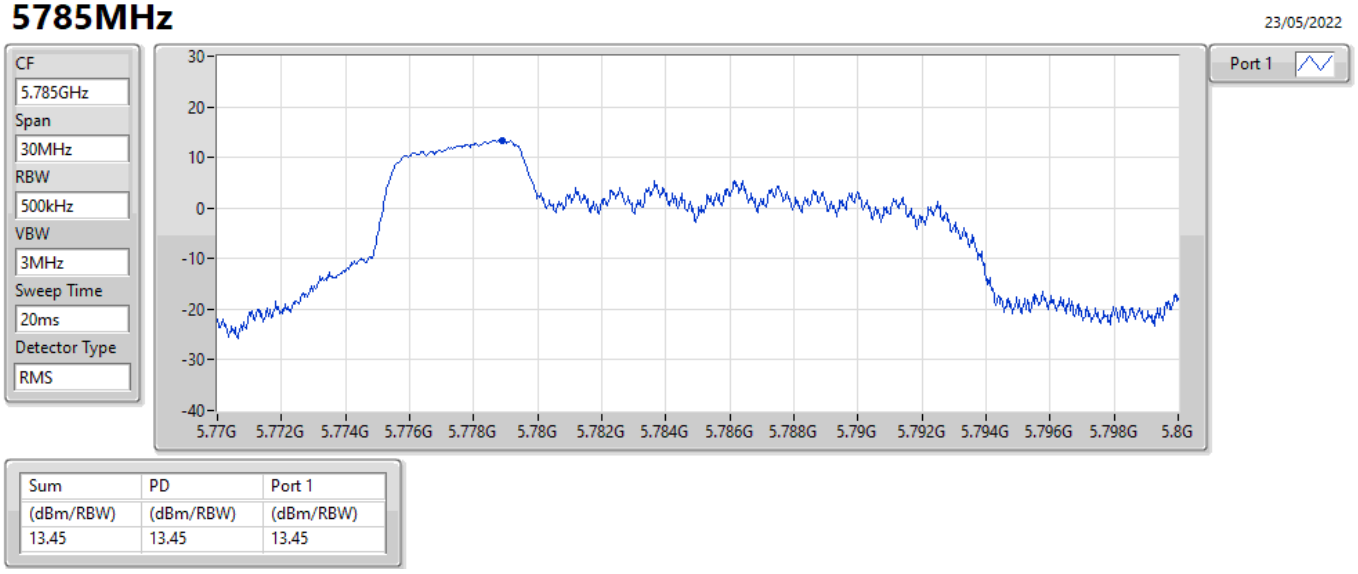

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.45	13.45	13.45

802.11ax HEW20_Nss1,(MCS0)_1TX PSD

5825MHz

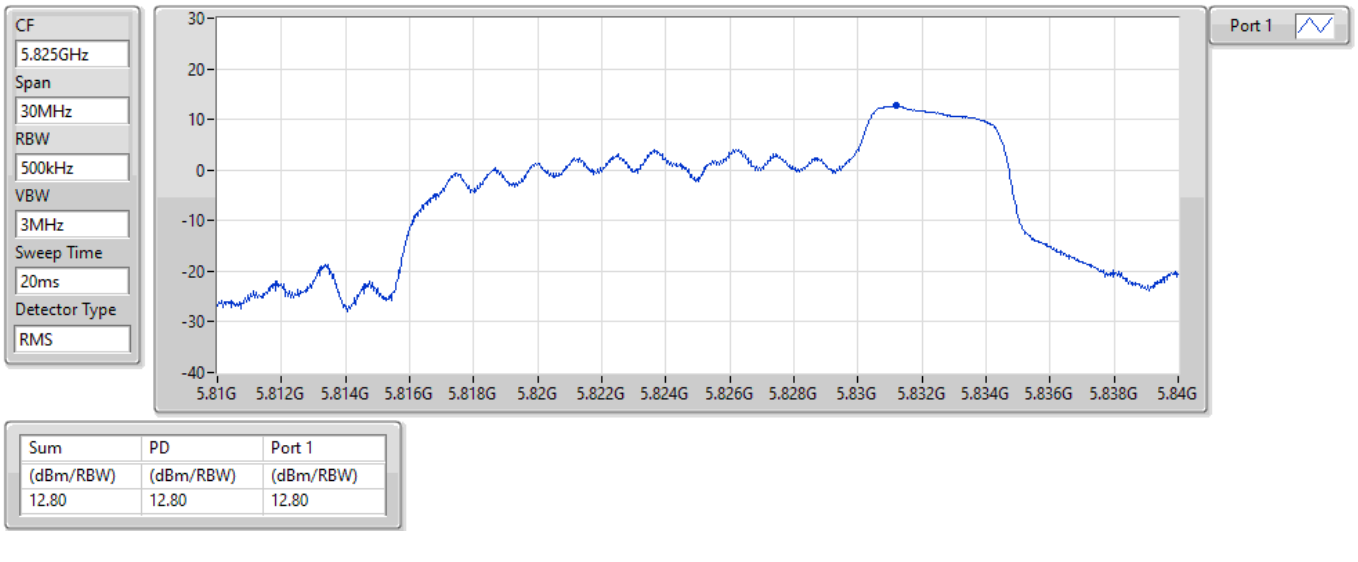

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.80	12.80	12.80

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.96
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.94
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.97
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	13.01

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	4.86	10.90	10.90	11.00
5200MHz	Pass	4.86	10.95	10.95	11.00
5240MHz	Pass	4.86	10.96	10.96	11.00
5260MHz	Pass	4.86	10.92	10.92	11.00
5300MHz	Pass	4.86	10.88	10.88	11.00
5320MHz	Pass	4.86	10.94	10.94	11.00
5500MHz	Pass	4.86	10.96	10.96	11.00
5580MHz	Pass	4.86	10.94	10.94	11.00
5700MHz	Pass	4.86	10.78	10.78	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.86	10.97	10.97	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.86	-1.72	-1.72	30.00
5745MHz	Pass	4.86	13.01	13.01	30.00
5785MHz	Pass	4.86	12.78	12.78	30.00
5825MHz	Pass	4.86	12.04	12.04	30.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5180MHz

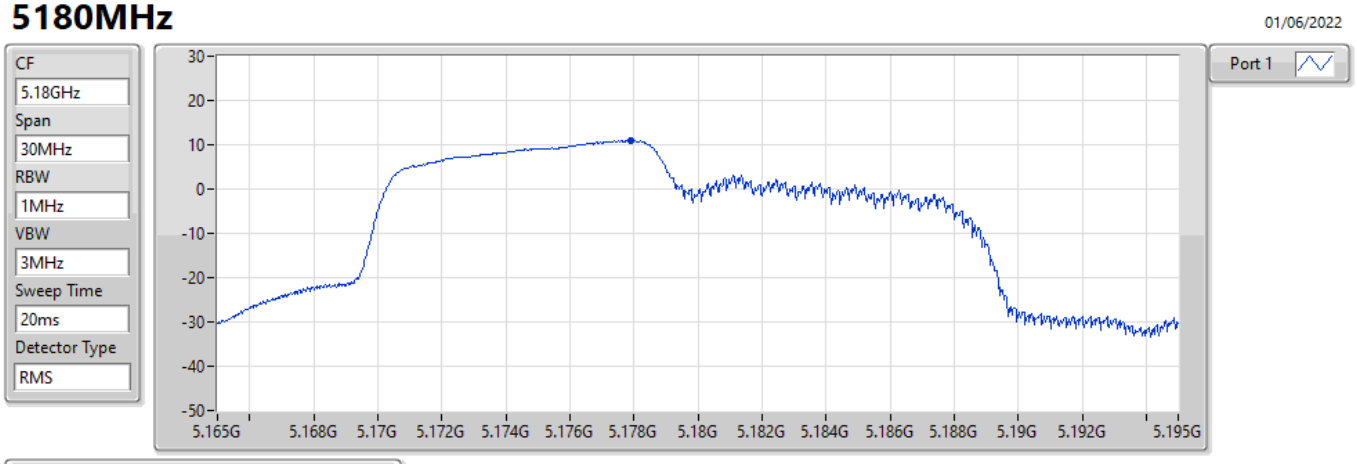

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.90	10.90	10.90

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5200MHz

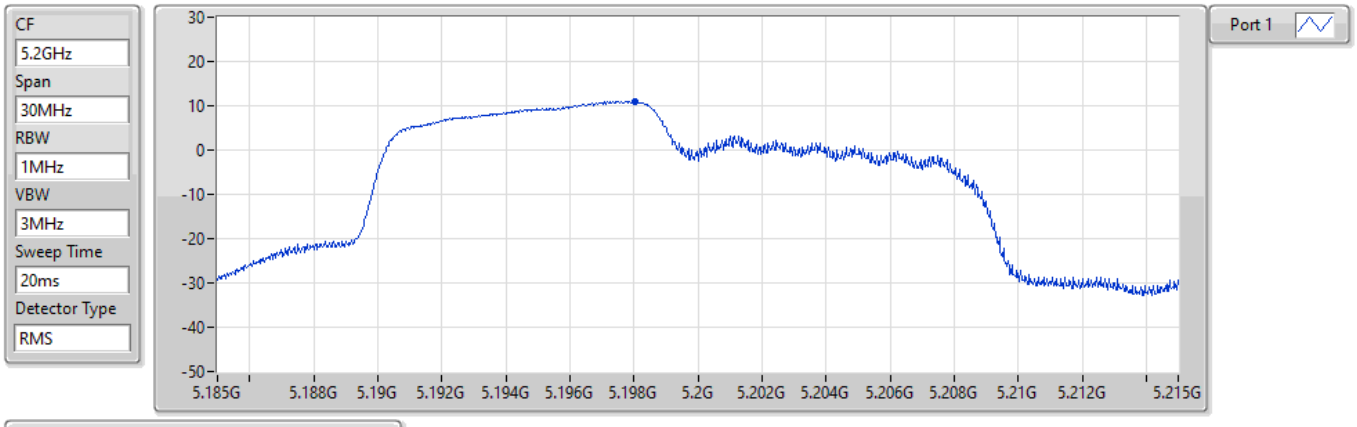

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.95	10.95	10.95

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5240MHz

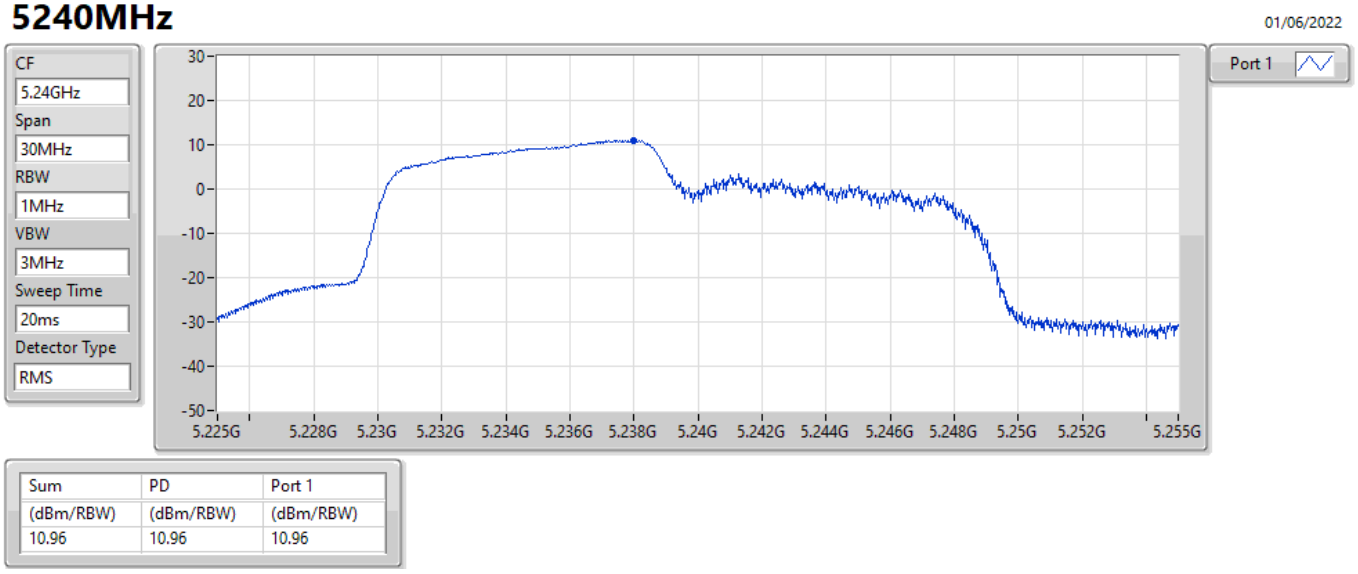

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.96	10.96	10.96

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5260MHz

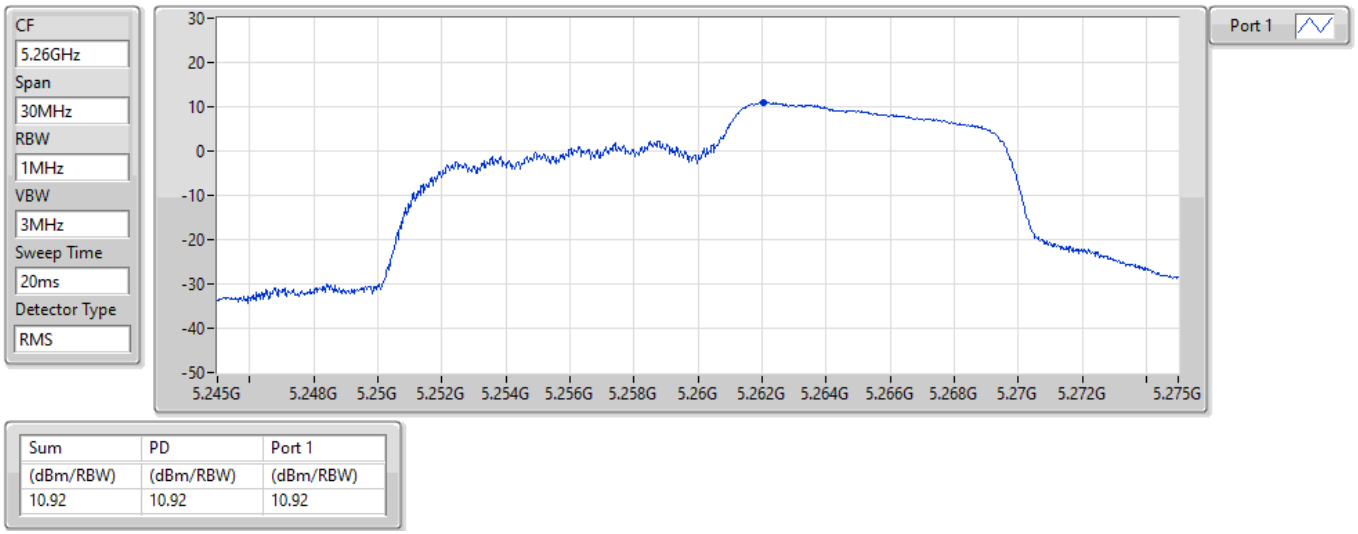

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.92	10.92	10.92

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5300MHz

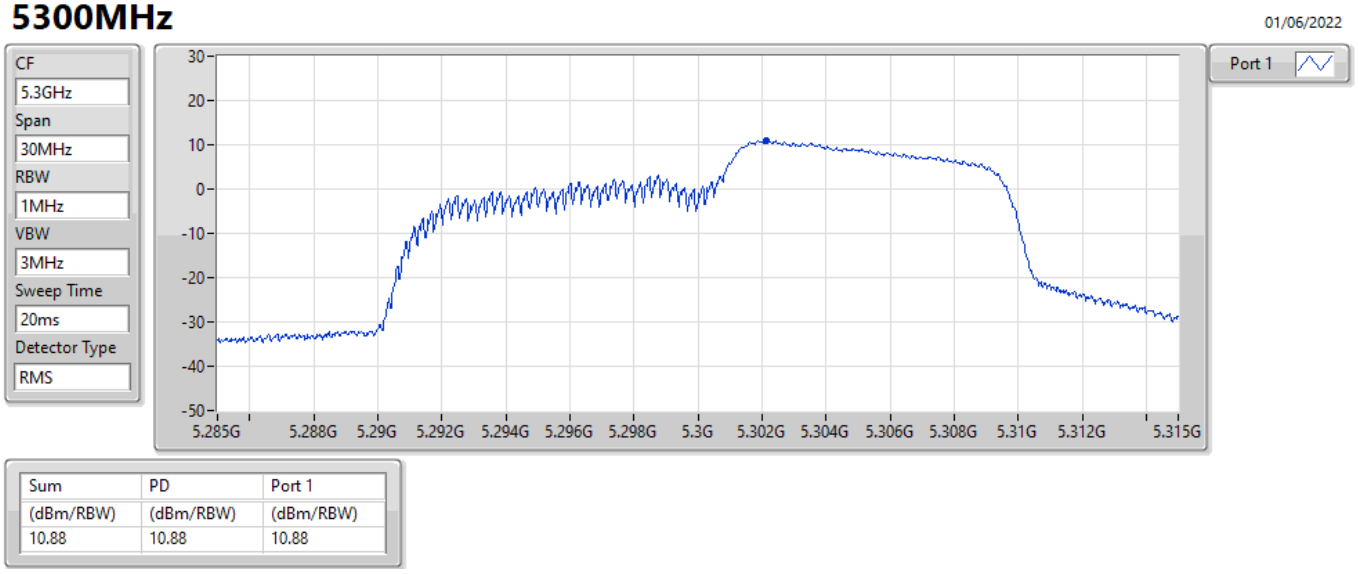

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.88	10.88	10.88

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5320MHz

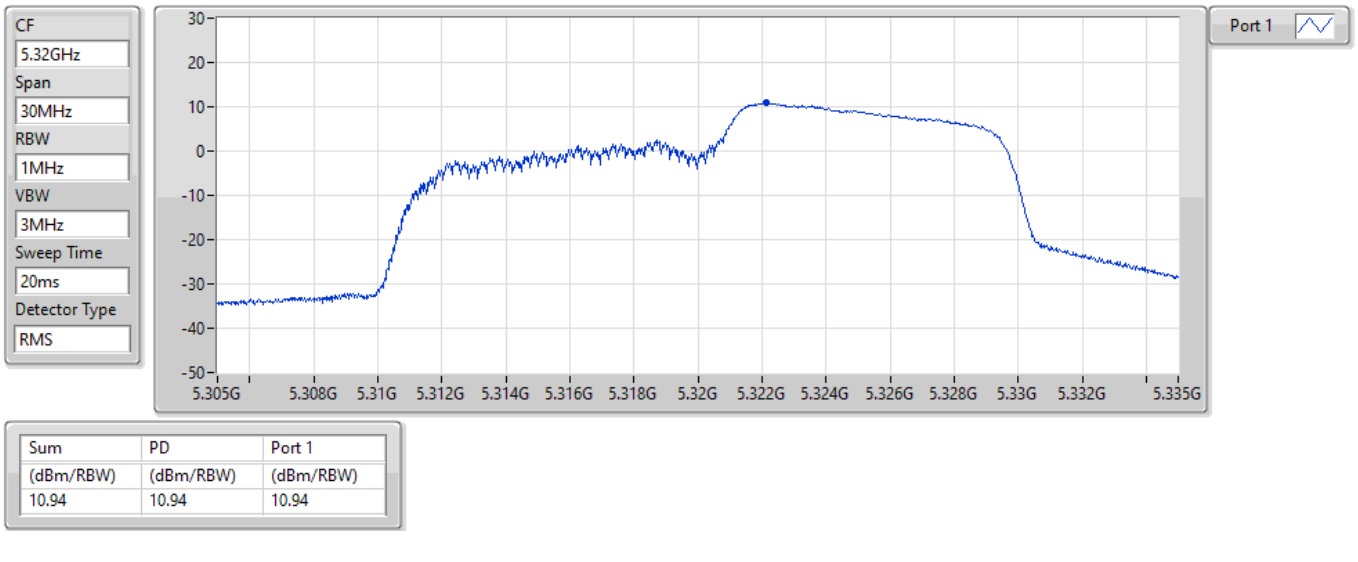

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.94	10.94	10.94

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5500MHz

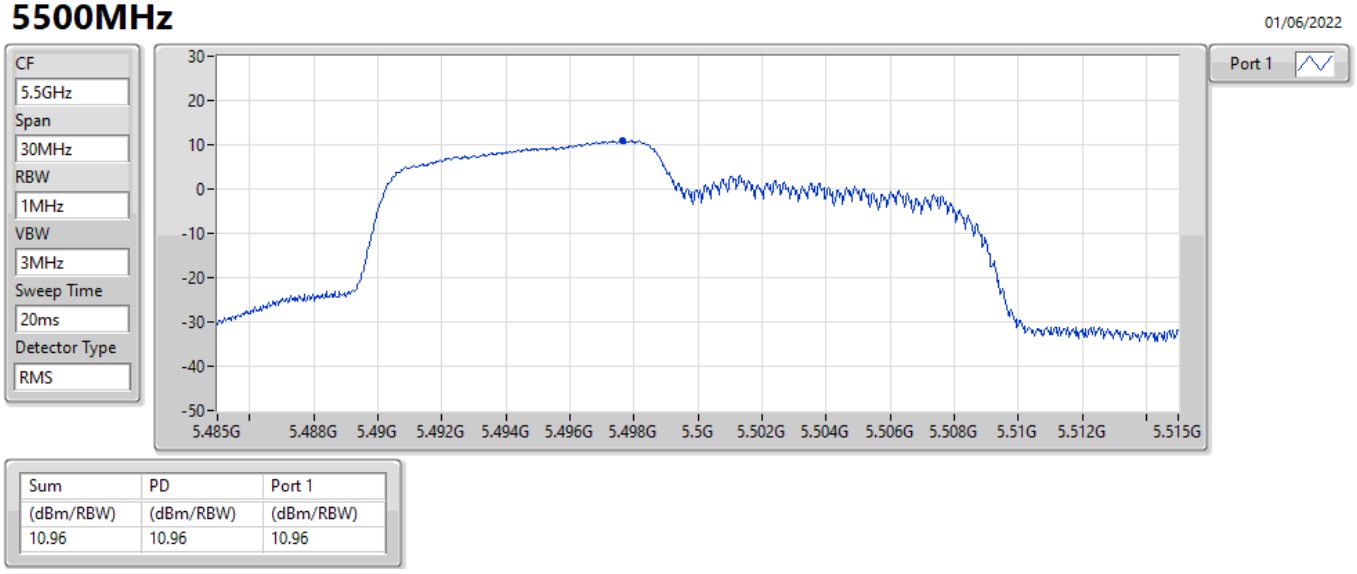

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.96	10.96	10.96

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5580MHz

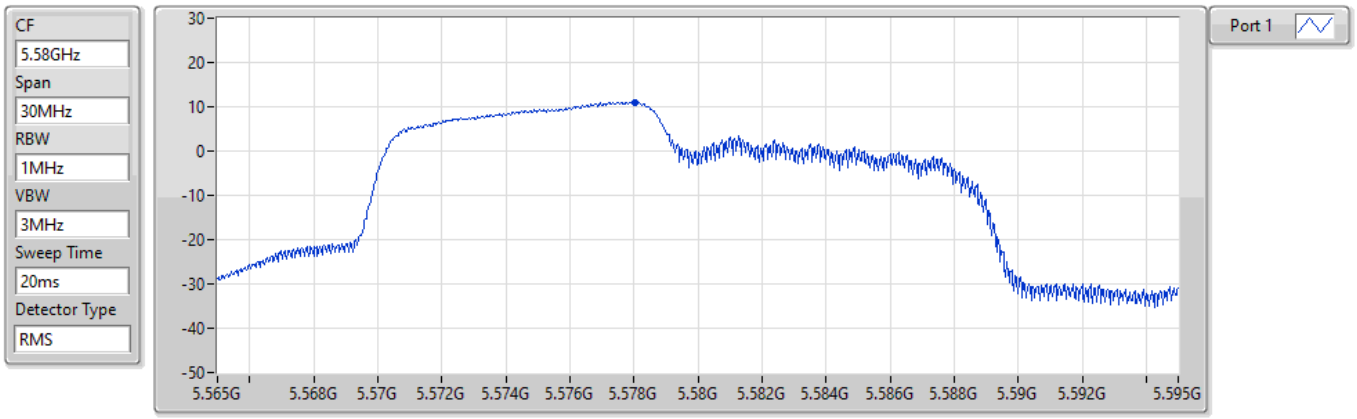

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.94	10.94	10.94

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5700MHz

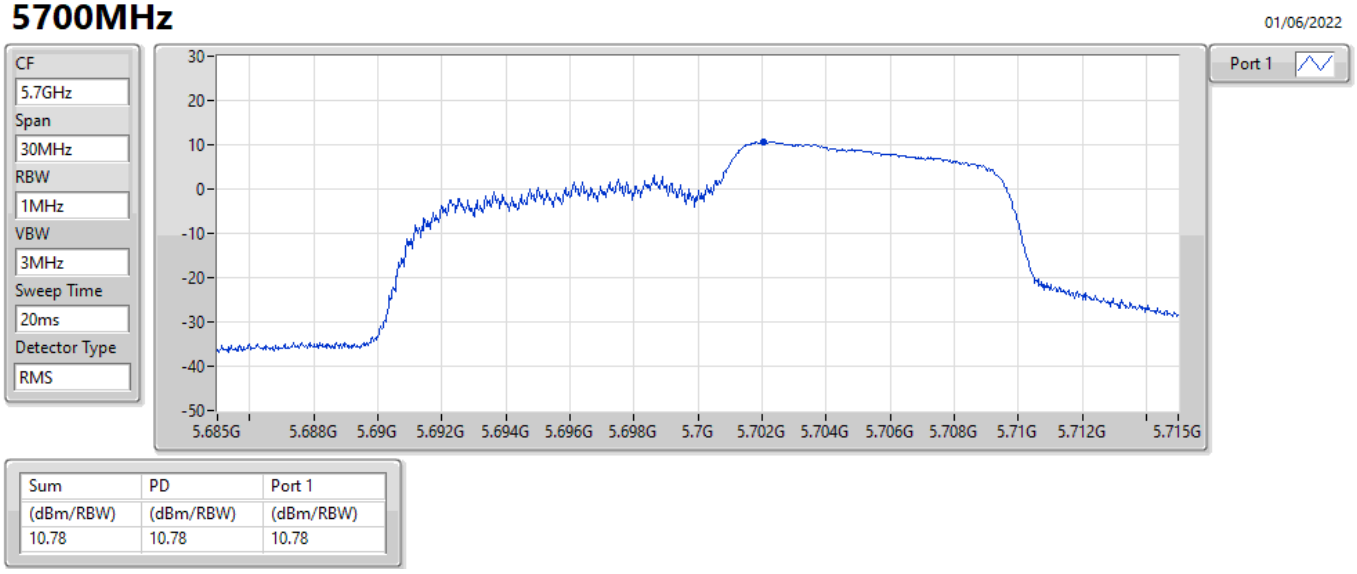

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.78	10.78	10.78

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.47-5.725GHz

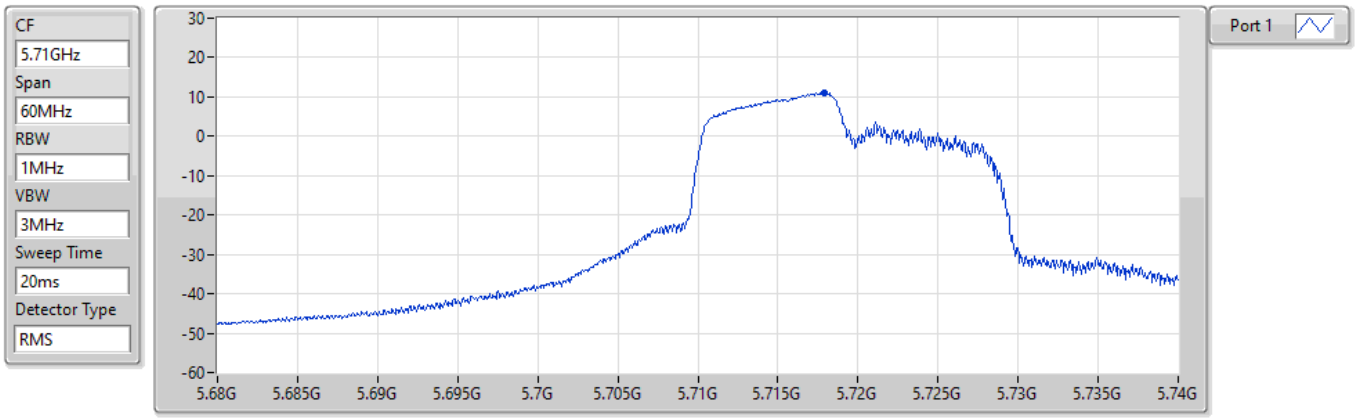

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.97	10.97	10.97

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.725-5.85GHz

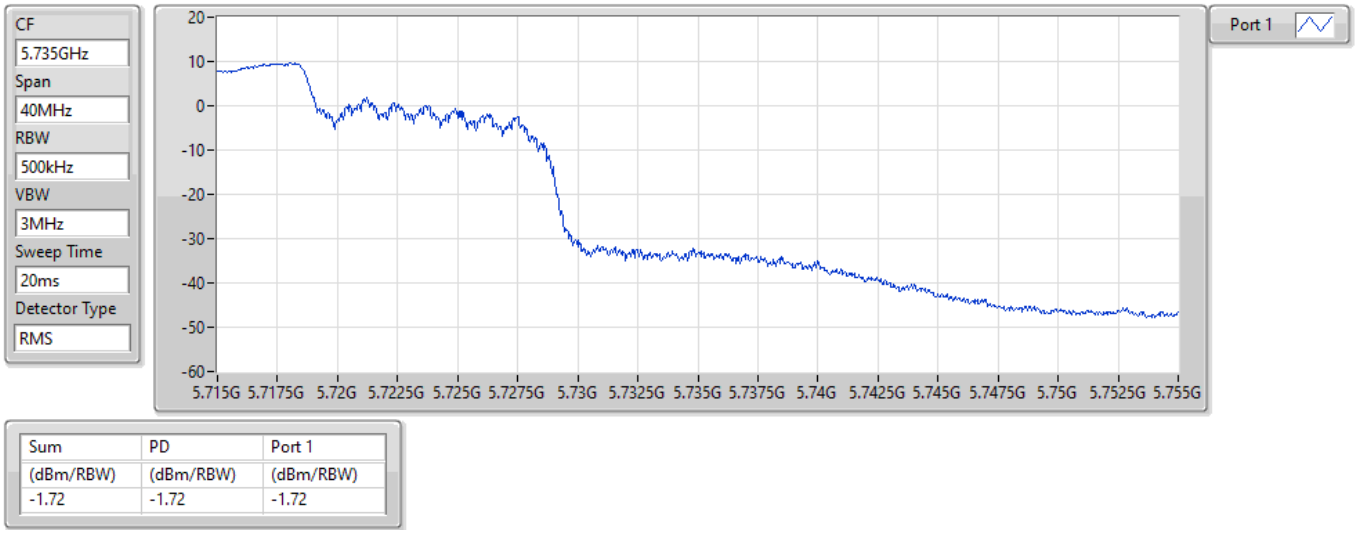

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.72	-1.72	-1.72

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5745MHz

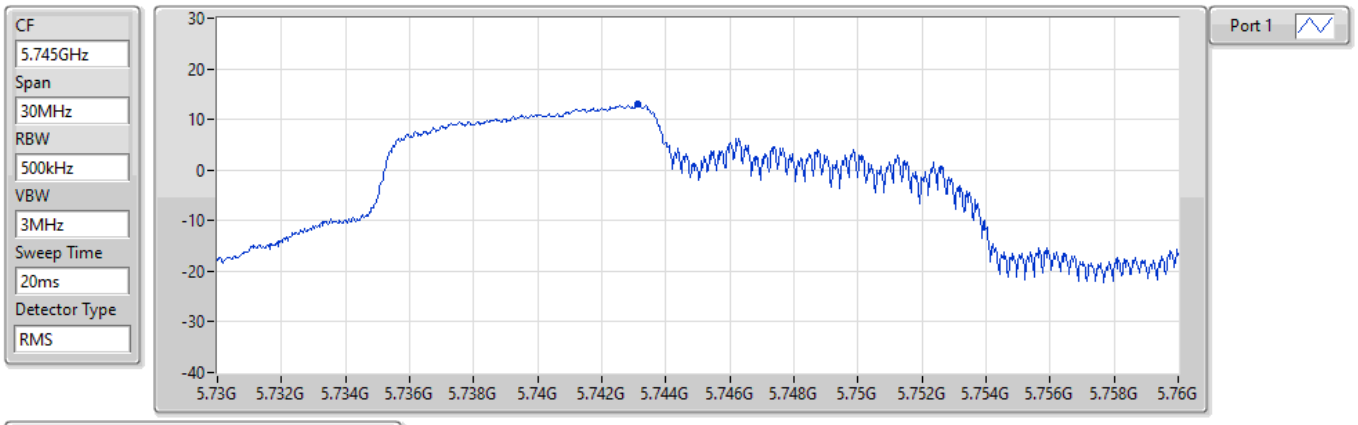

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.01	13.01	13.01

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5785MHz

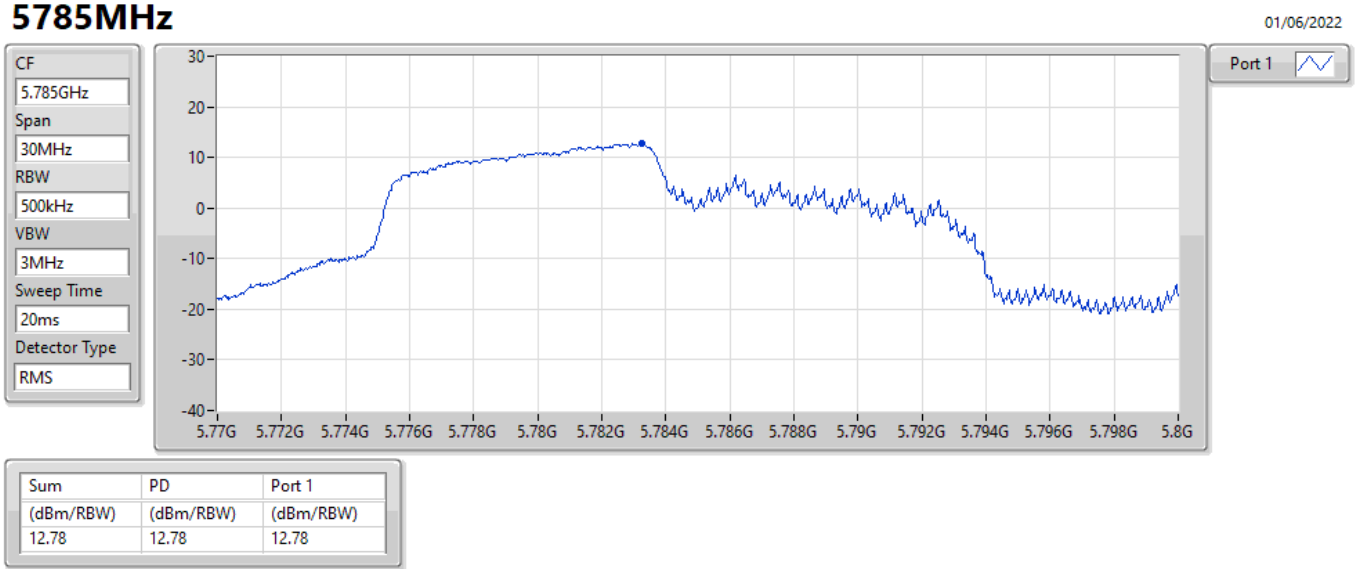

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.78	12.78	12.78

802.11ax HEW20_Nss1,(MCS0)_1TX PSD

5825MHz

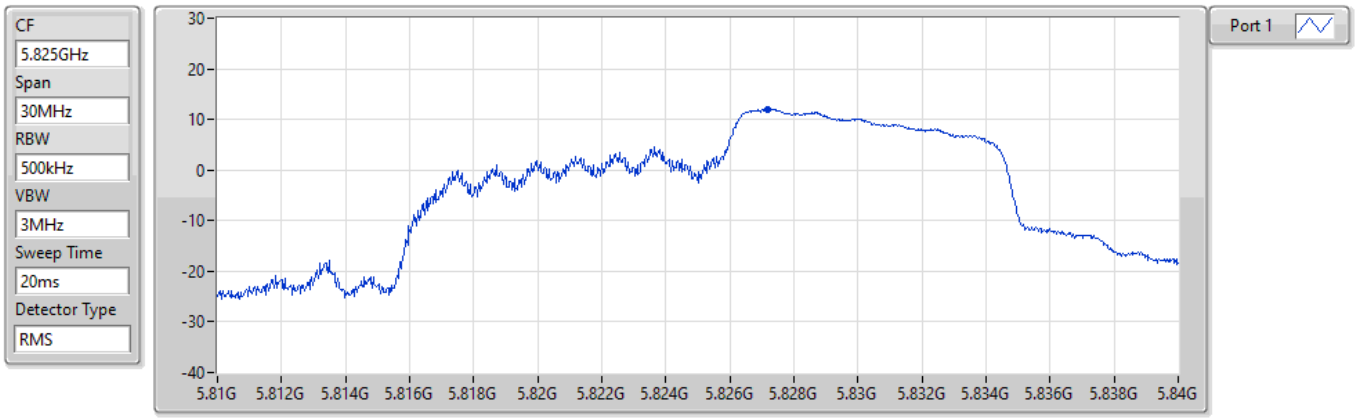

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.04	12.04	12.04

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.82
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.99
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.92
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	14.82

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	5.00	10.78	10.78	11.00
5200MHz	Pass	5.00	10.80	10.80	11.00
5240MHz	Pass	5.00	10.82	10.82	11.00
5260MHz	Pass	5.00	10.93	10.93	11.00
5300MHz	Pass	5.00	10.77	10.77	11.00
5320MHz	Pass	5.00	10.99	10.99	11.00
5500MHz	Pass	5.00	10.88	10.88	11.00
5580MHz	Pass	5.00	10.92	10.92	11.00
5700MHz	Pass	5.00	10.89	10.89	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	10.81	10.81	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	-13.12	-13.12	30.00
5745MHz	Pass	5.00	14.82	14.82	30.00
5785MHz	Pass	5.00	12.77	12.77	30.00
5825MHz	Pass	5.00	11.97	11.97	30.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5180MHz

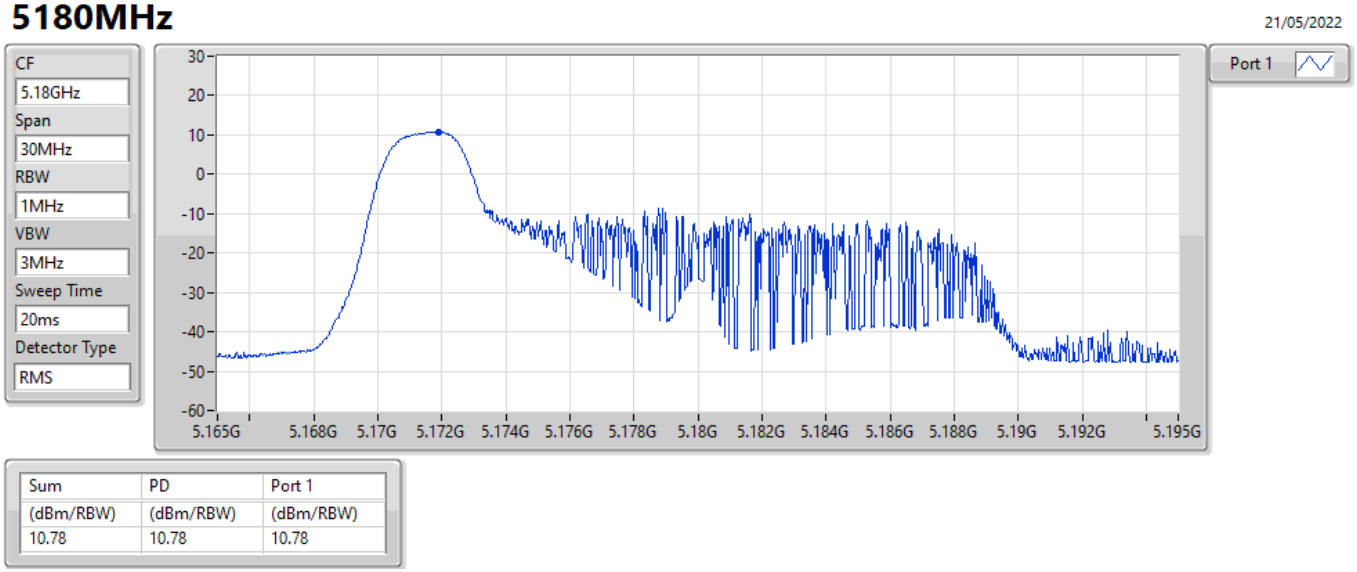

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.78	10.78	10.78

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5200MHz

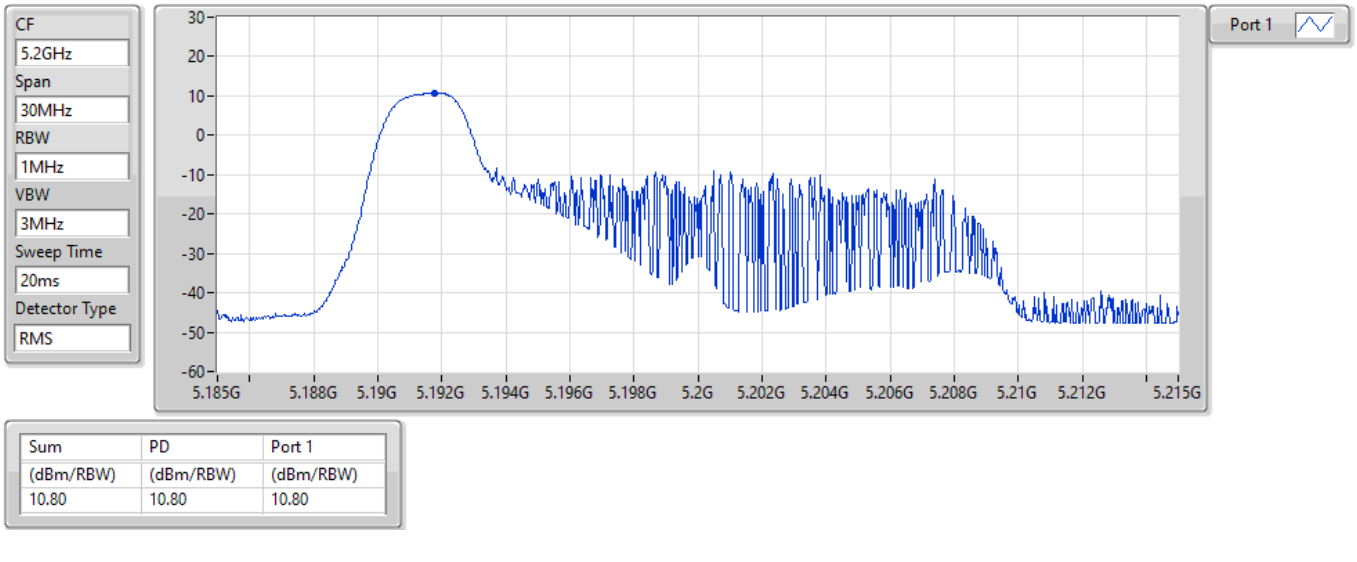

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.80	10.80	10.80

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5240MHz

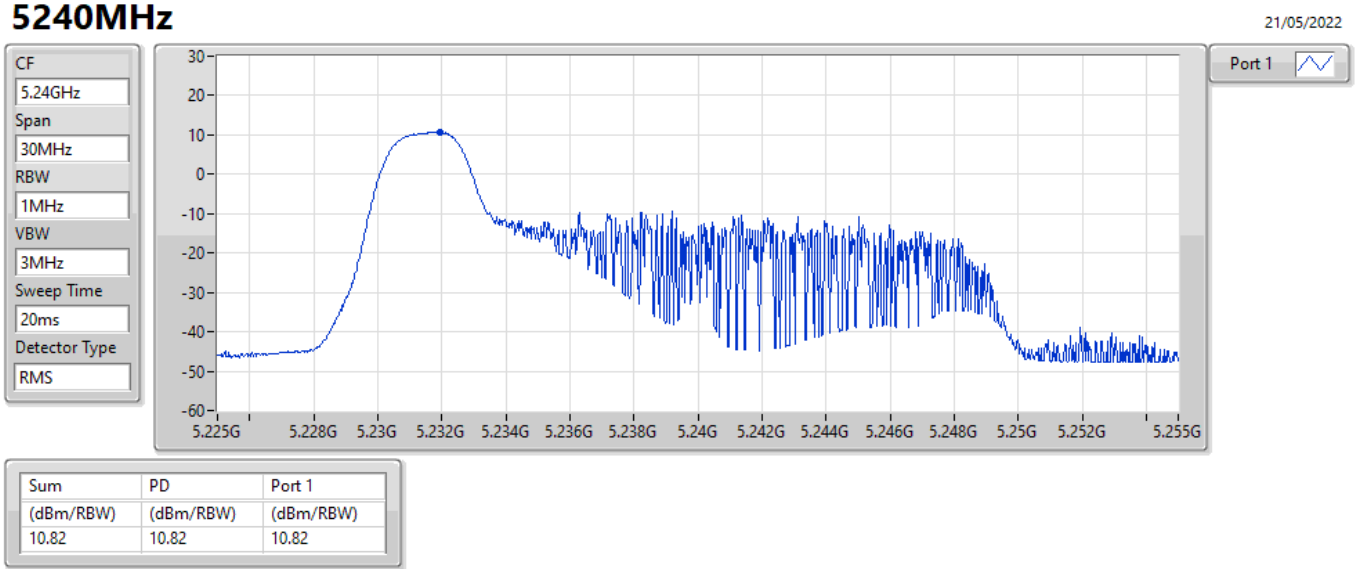

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.82	10.82	10.82

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5260MHz

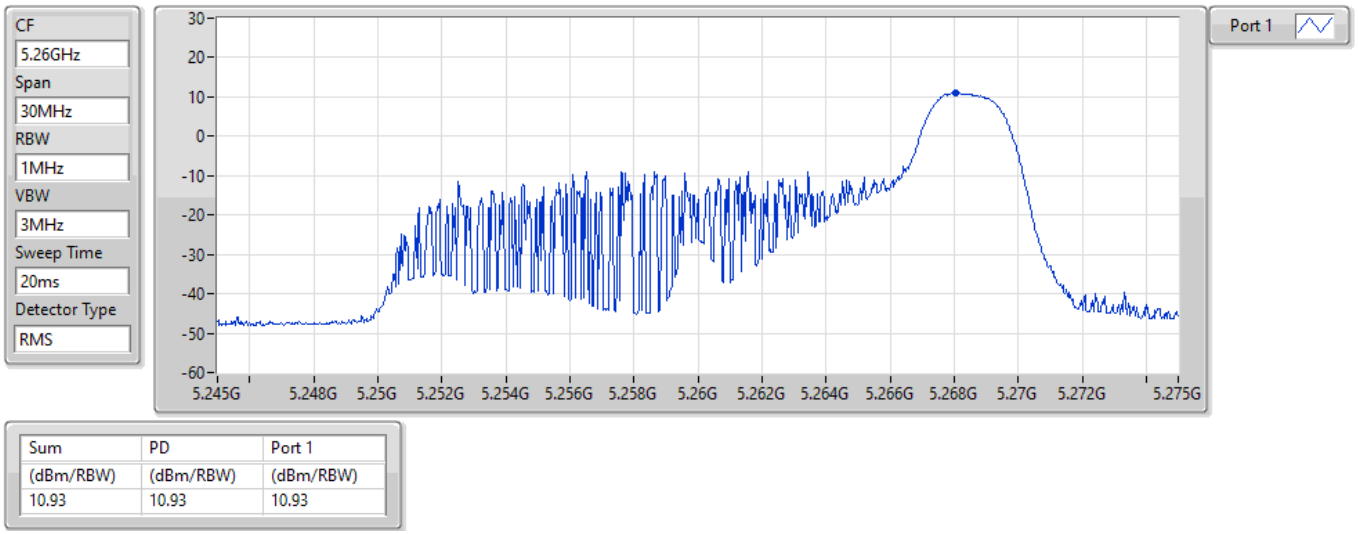

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.93	10.93	10.93

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5300MHz

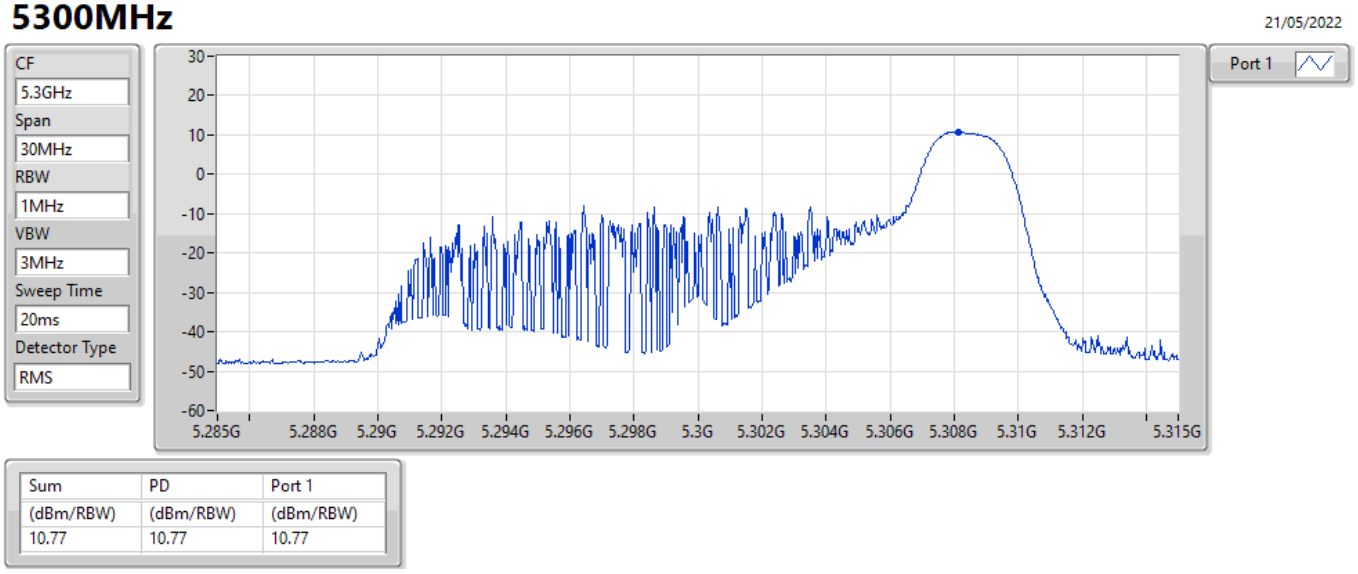

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.77	10.77	10.77

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5320MHz

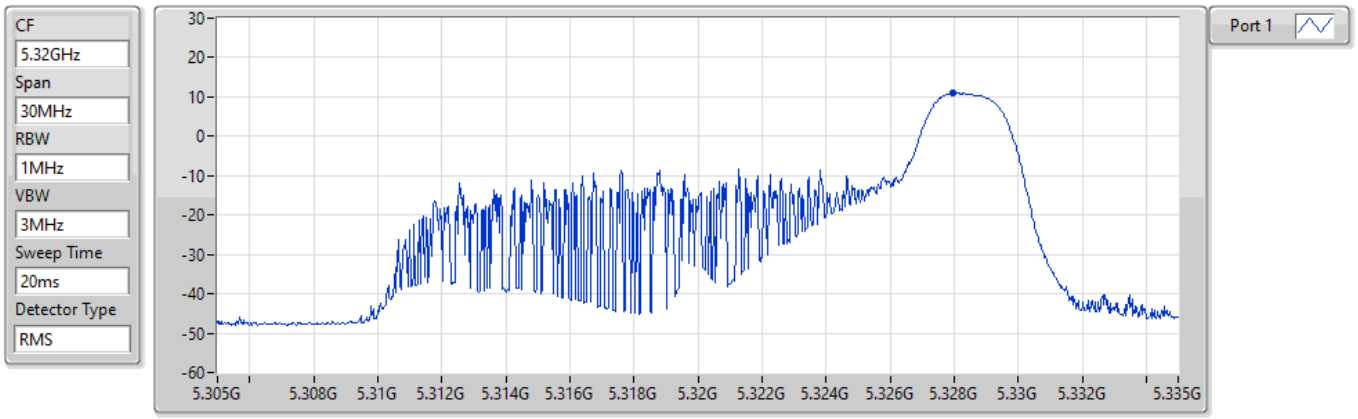

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.99	10.99	10.99

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5500MHz

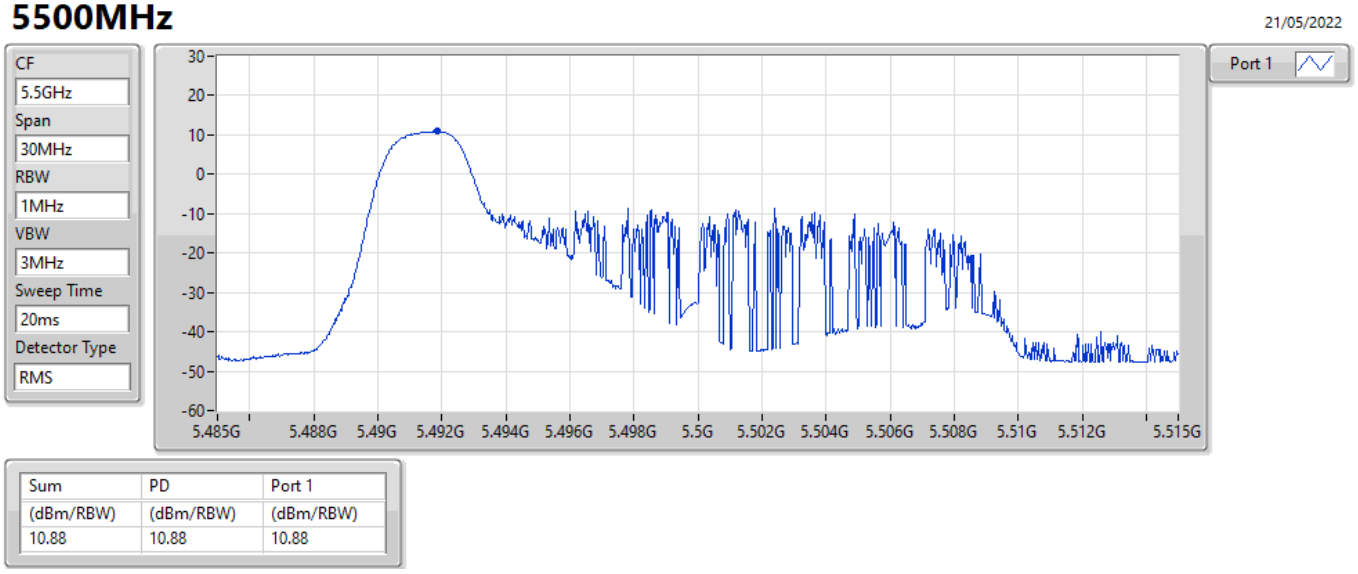

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.88	10.88	10.88

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5580MHz

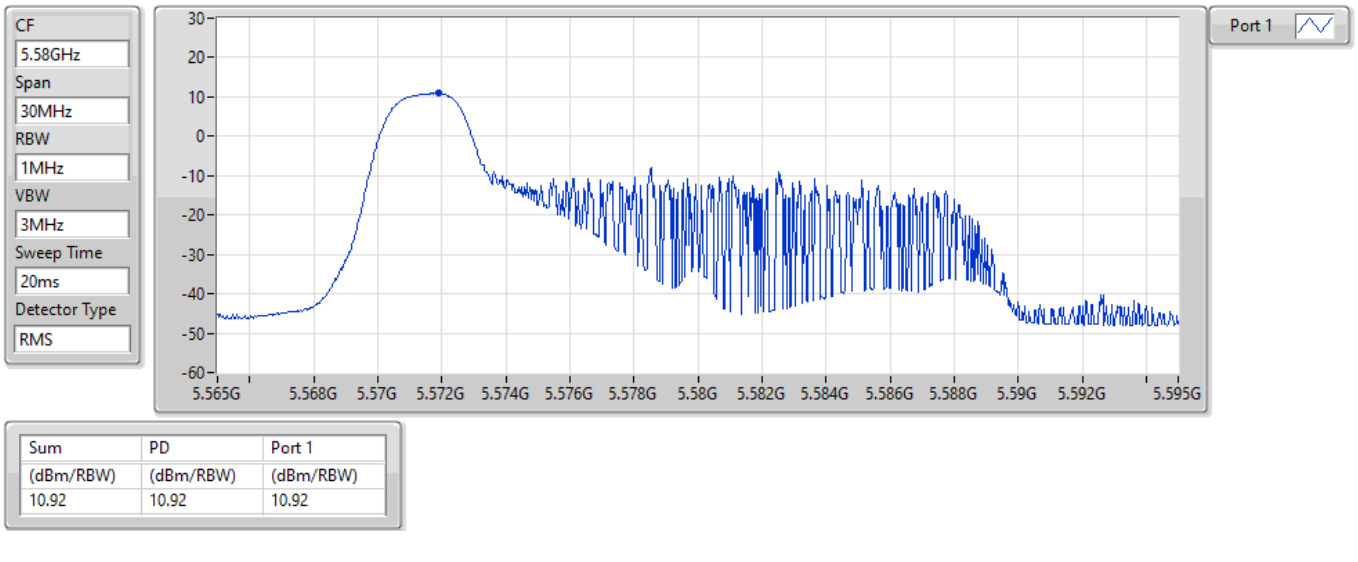

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.92	10.92	10.92

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5700MHz

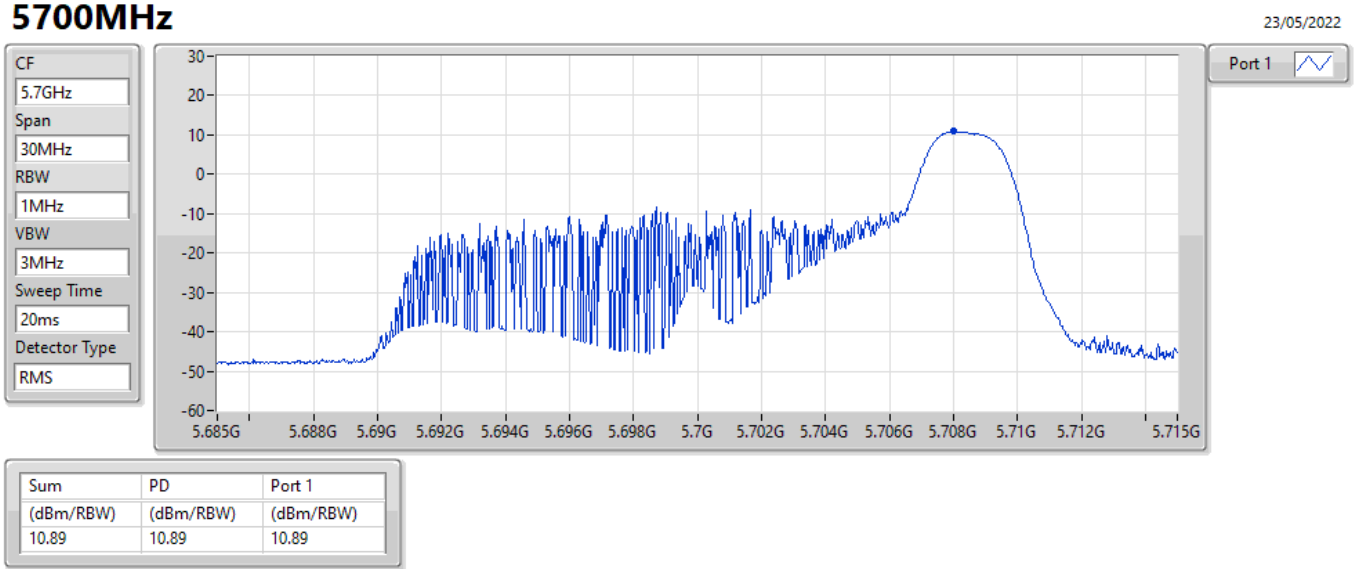

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.89	10.89	10.89

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.47-5.725GHz

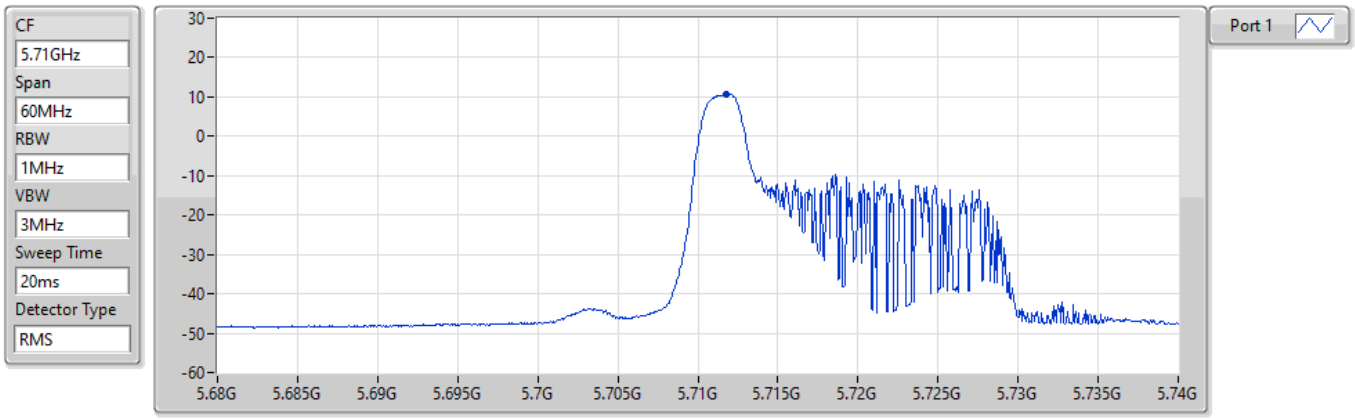

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.81	10.81	10.81

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.725-5.85GHz

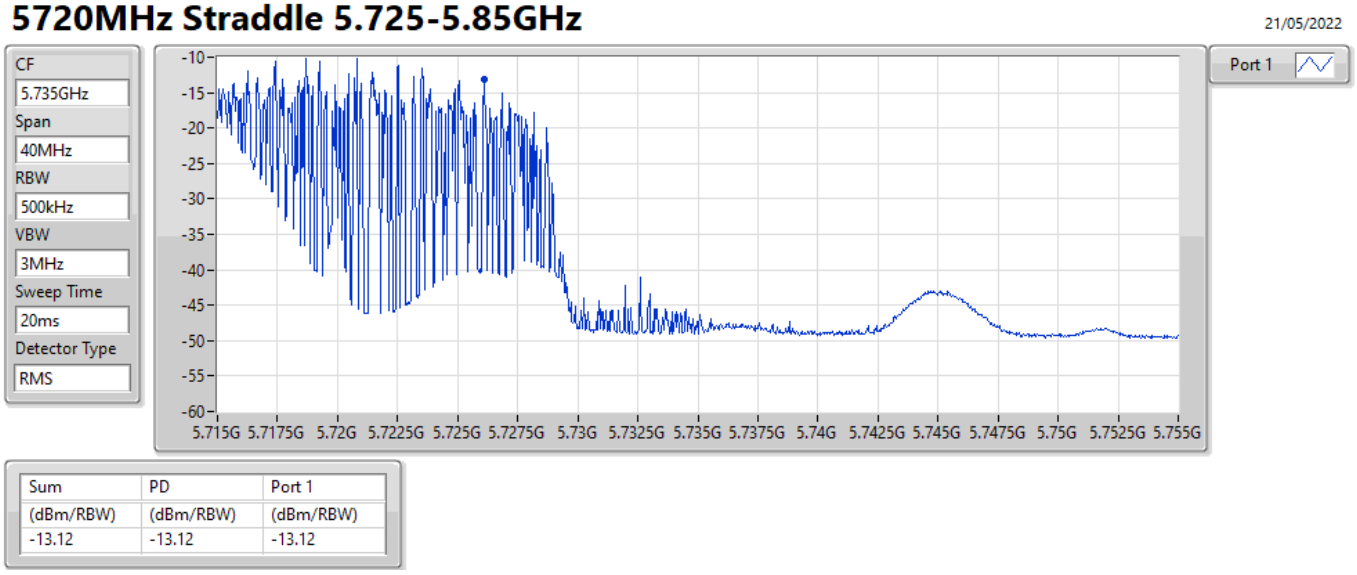

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.12	-13.12	-13.12

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5745MHz

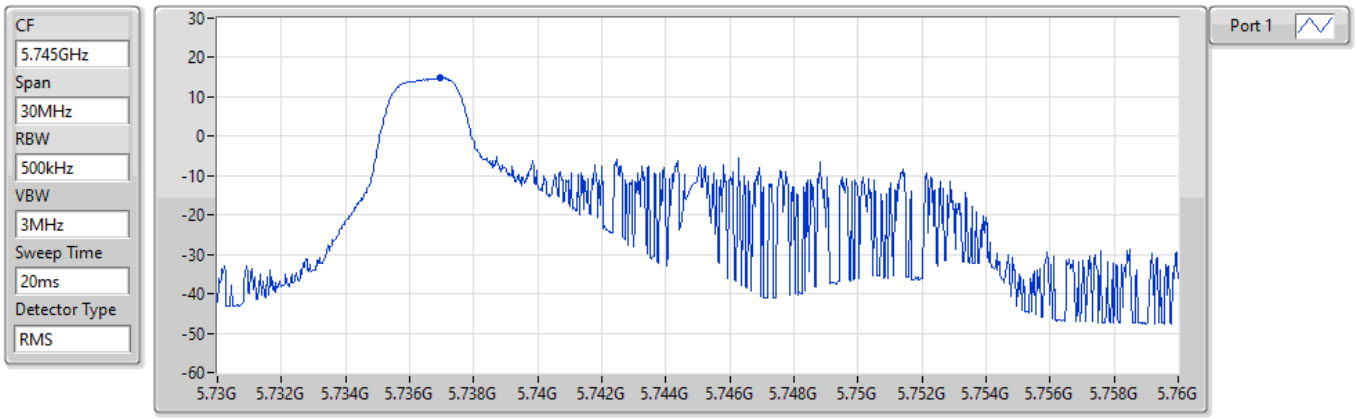

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.82	14.82	14.82

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5785MHz

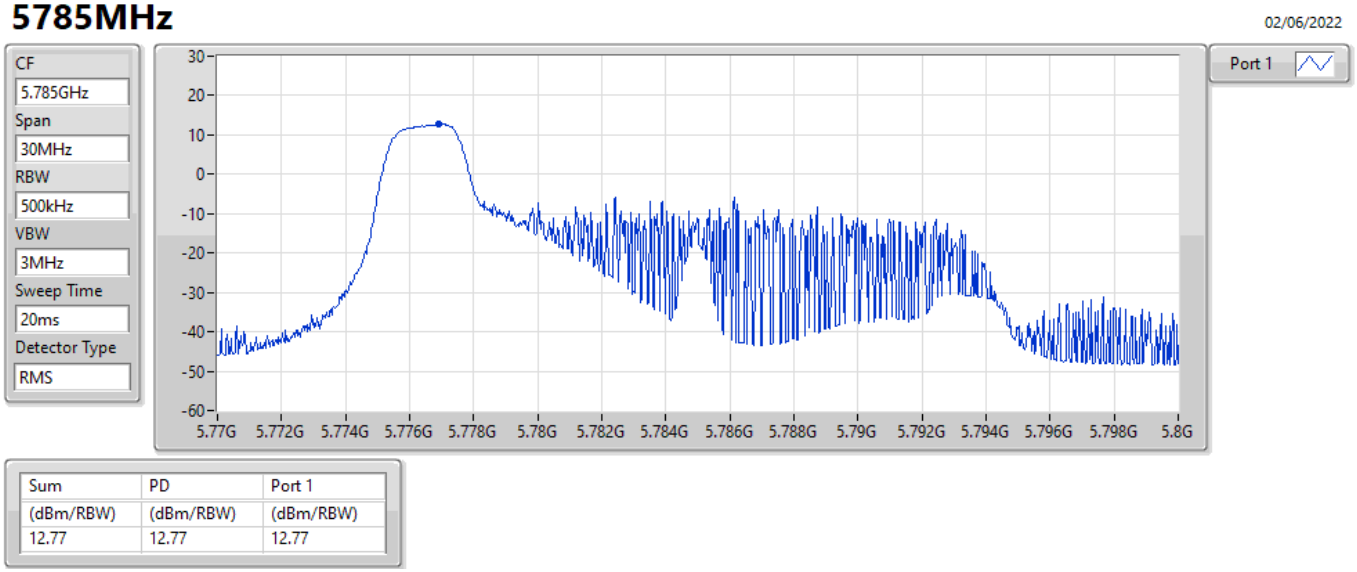

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.77	12.77	12.77

802.11ax HEW20_Nss1,(MCS0)_1TX PSD

5825MHz

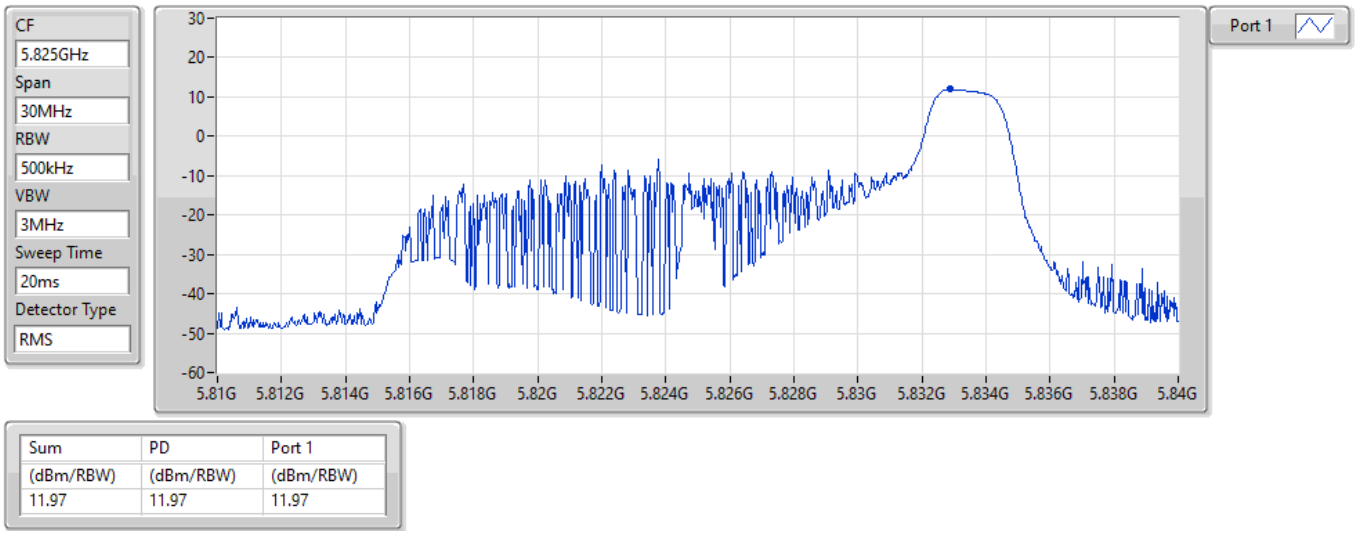

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.97	11.97	11.97

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.97
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.92
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.98
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	13.65

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	5.00	10.92	10.92	11.00
5200MHz	Pass	5.00	10.94	10.94	11.00
5240MHz	Pass	5.00	10.97	10.97	11.00
5260MHz	Pass	5.00	10.88	10.88	11.00
5300MHz	Pass	5.00	10.82	10.82	11.00
5320MHz	Pass	5.00	10.92	10.92	11.00
5500MHz	Pass	5.00	10.90	10.90	11.00
5580MHz	Pass	5.00	10.97	10.97	11.00
5700MHz	Pass	5.00	10.89	10.89	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	10.98	10.98	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	-0.33	-0.33	30.00
5745MHz	Pass	5.00	13.65	13.65	30.00
5785MHz	Pass	5.00	13.45	13.45	30.00
5825MHz	Pass	5.00	12.80	12.80	30.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5180MHz

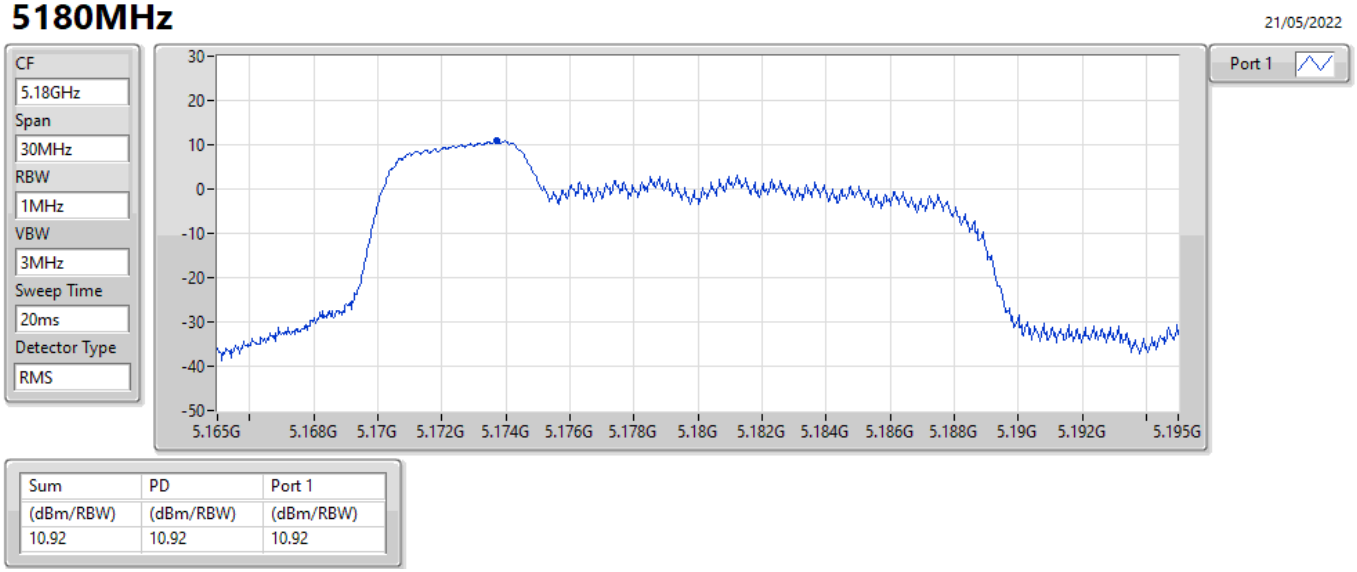

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.92	10.92	10.92

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5200MHz

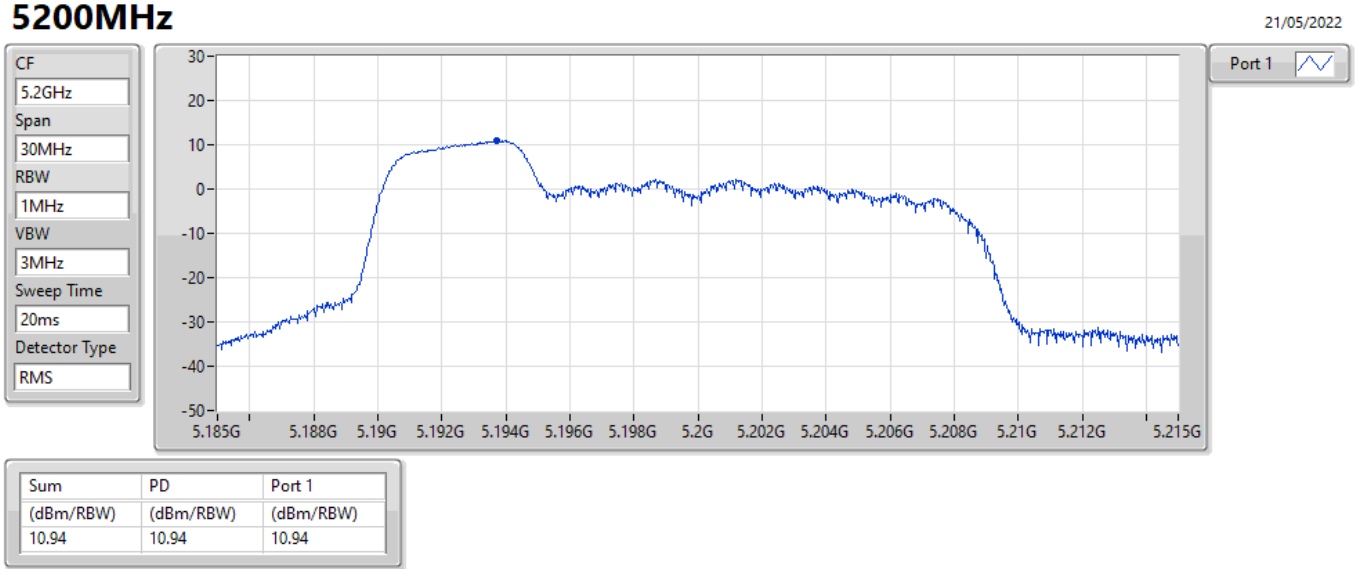

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.94	10.94	10.94

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5240MHz

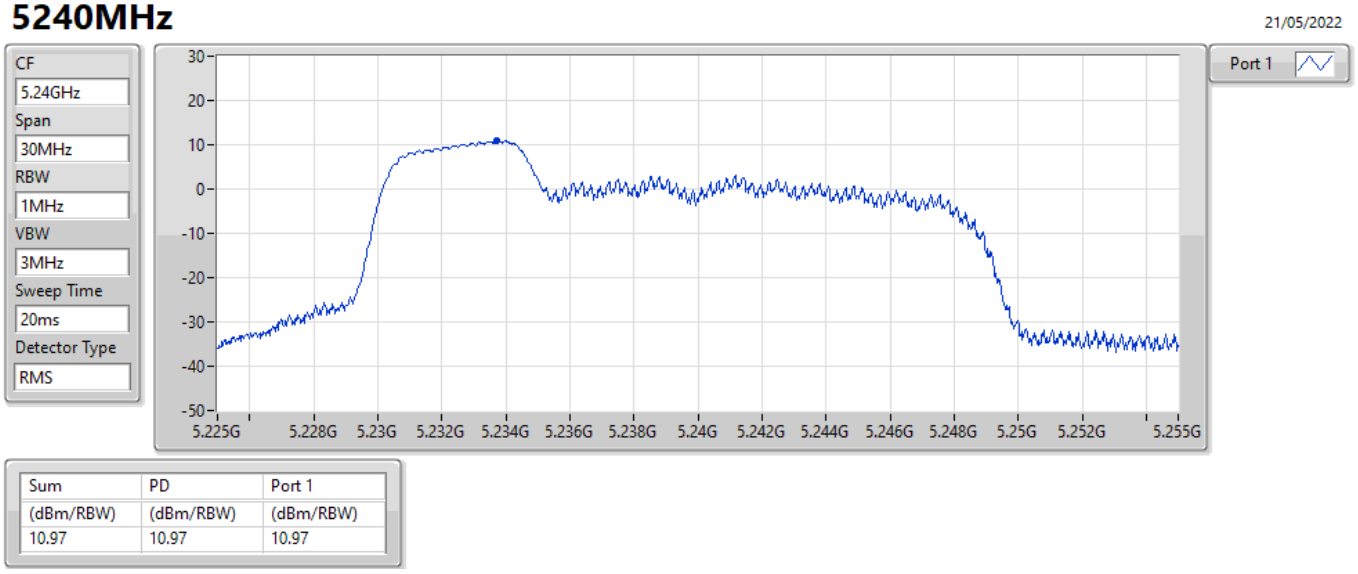

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.97	10.97	10.97

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5260MHz

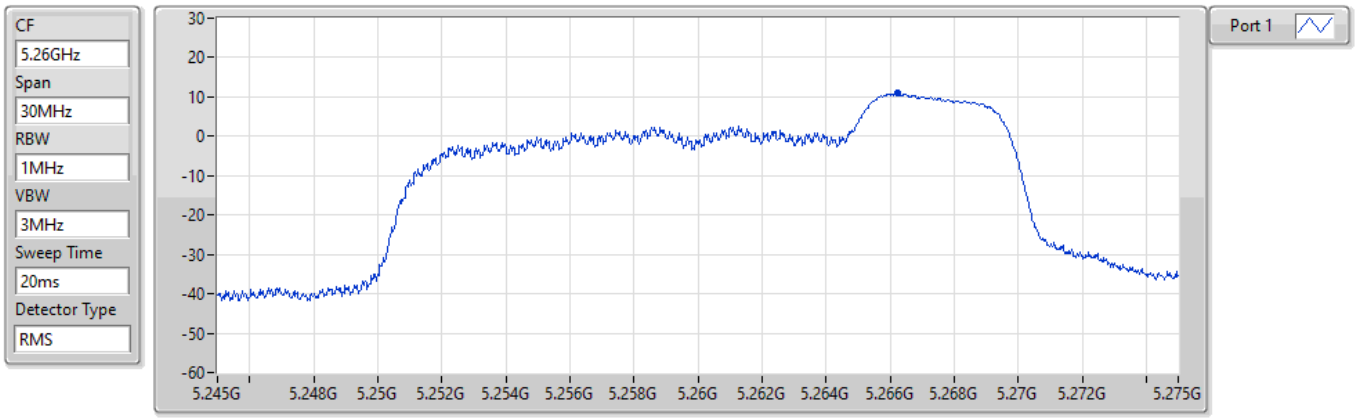

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.88	10.88	10.88

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5300MHz

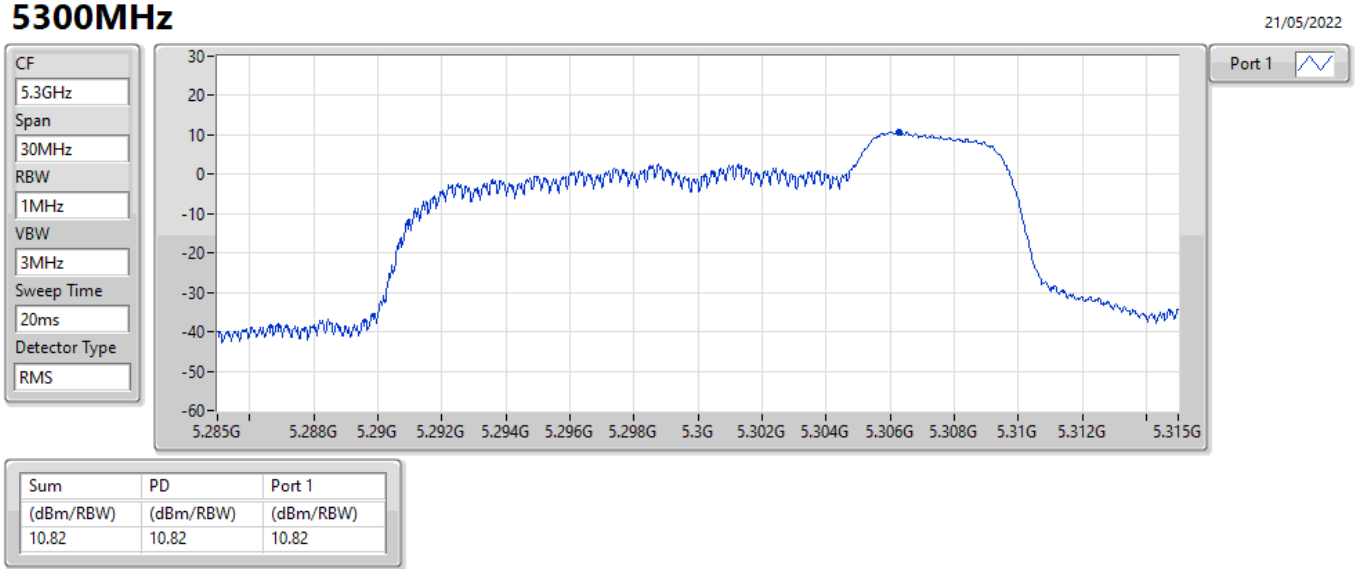

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.82	10.82	10.82

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5320MHz

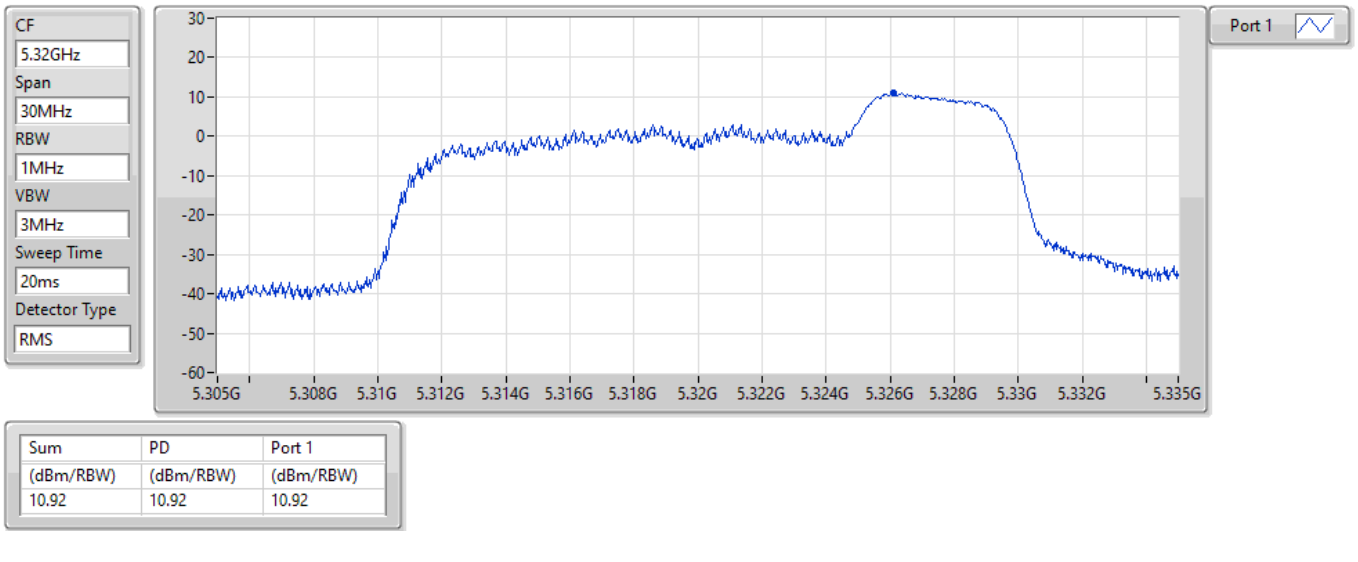

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.92	10.92	10.92

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5500MHz

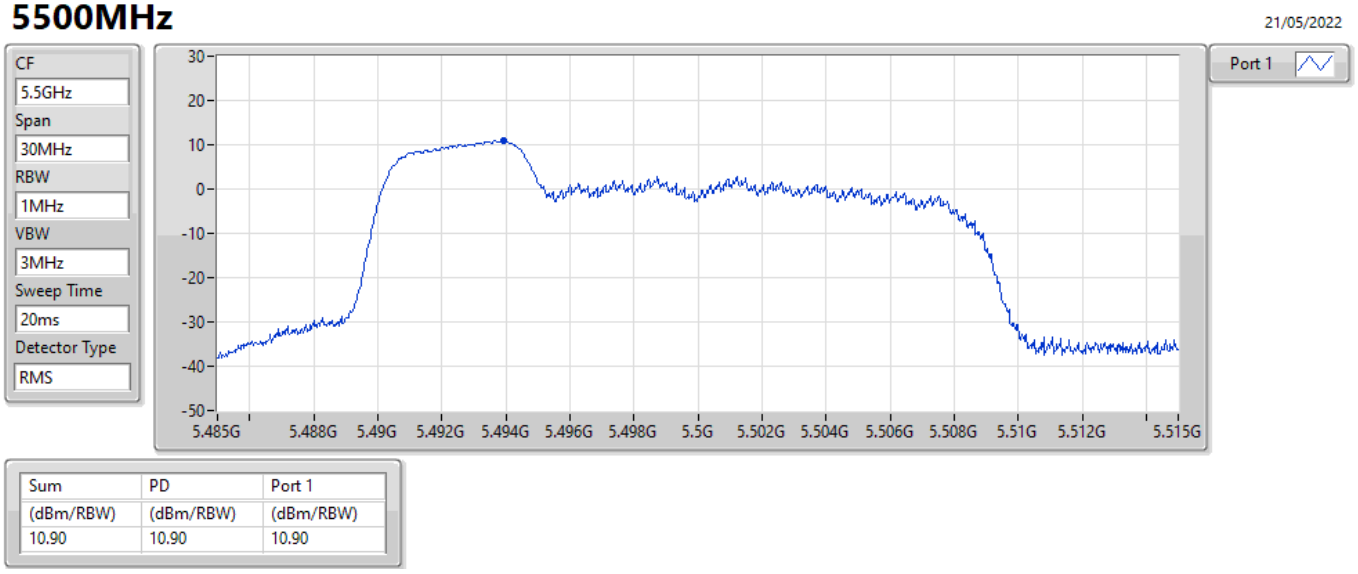

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.90	10.90	10.90

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5580MHz

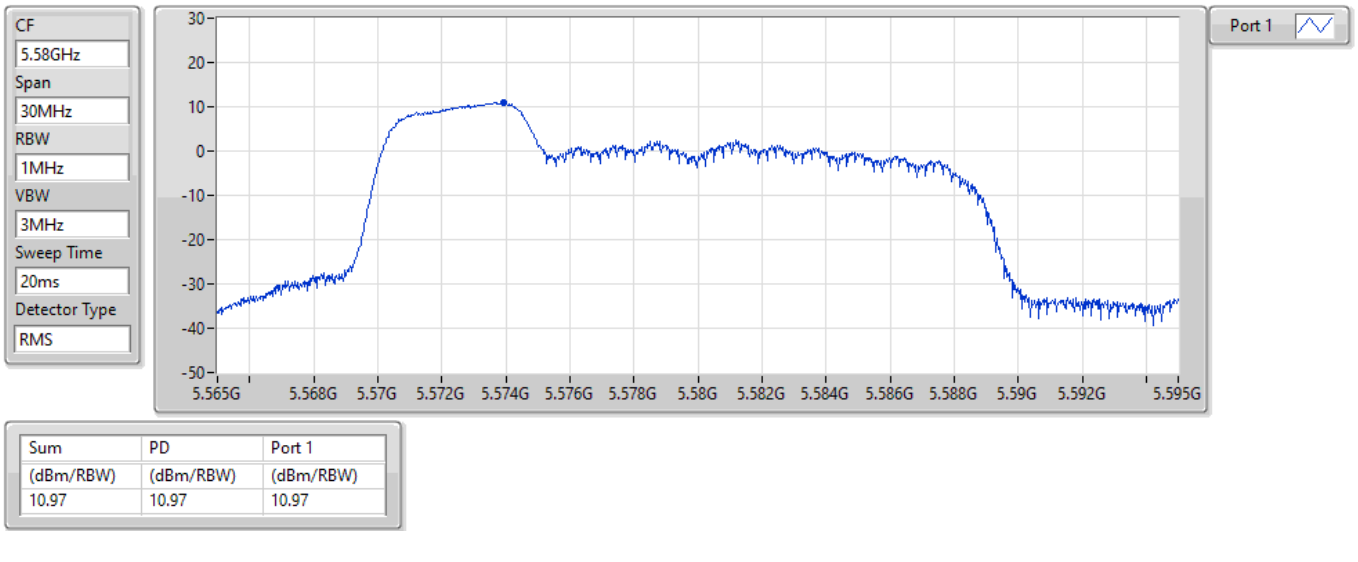

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.97	10.97	10.97

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5700MHz

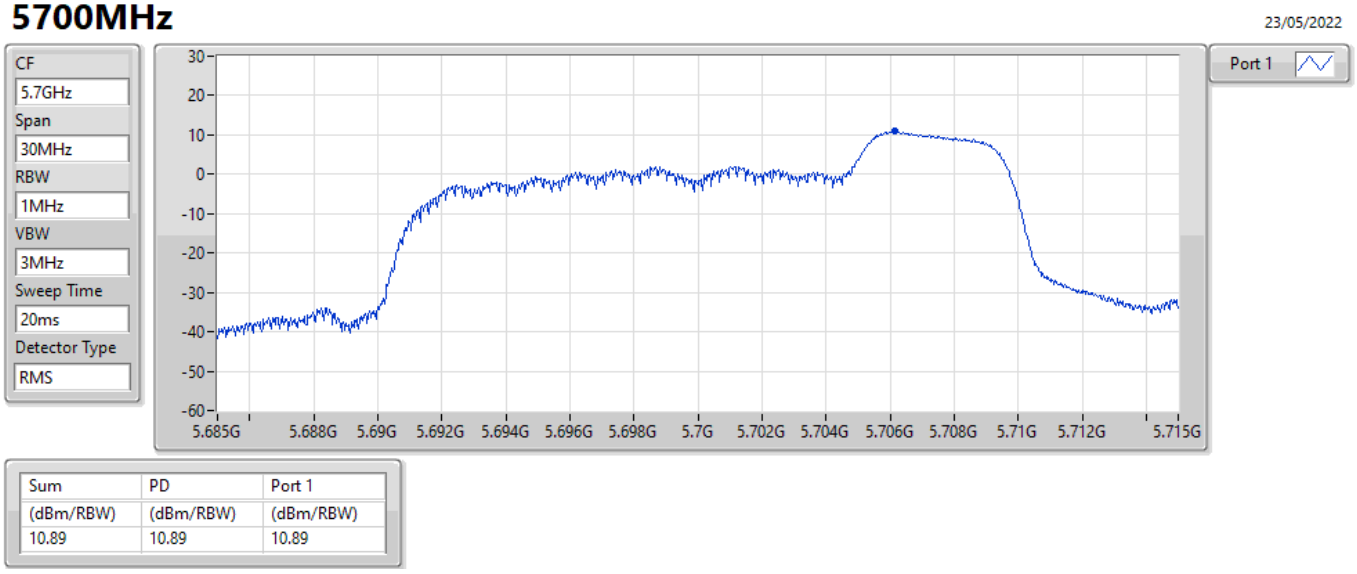

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.89	10.89	10.89

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.47-5.725GHz

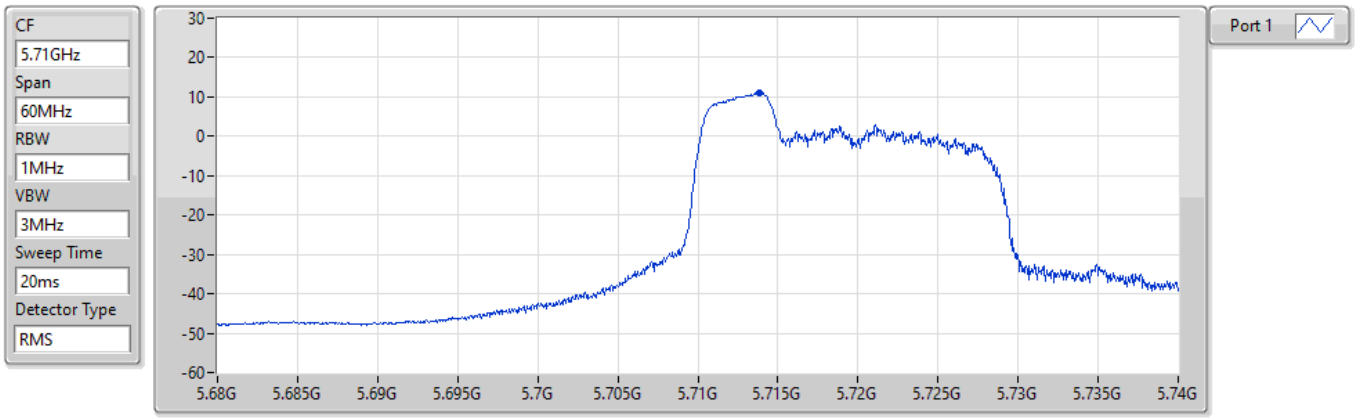

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.98	10.98	10.98

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.725-5.85GHz

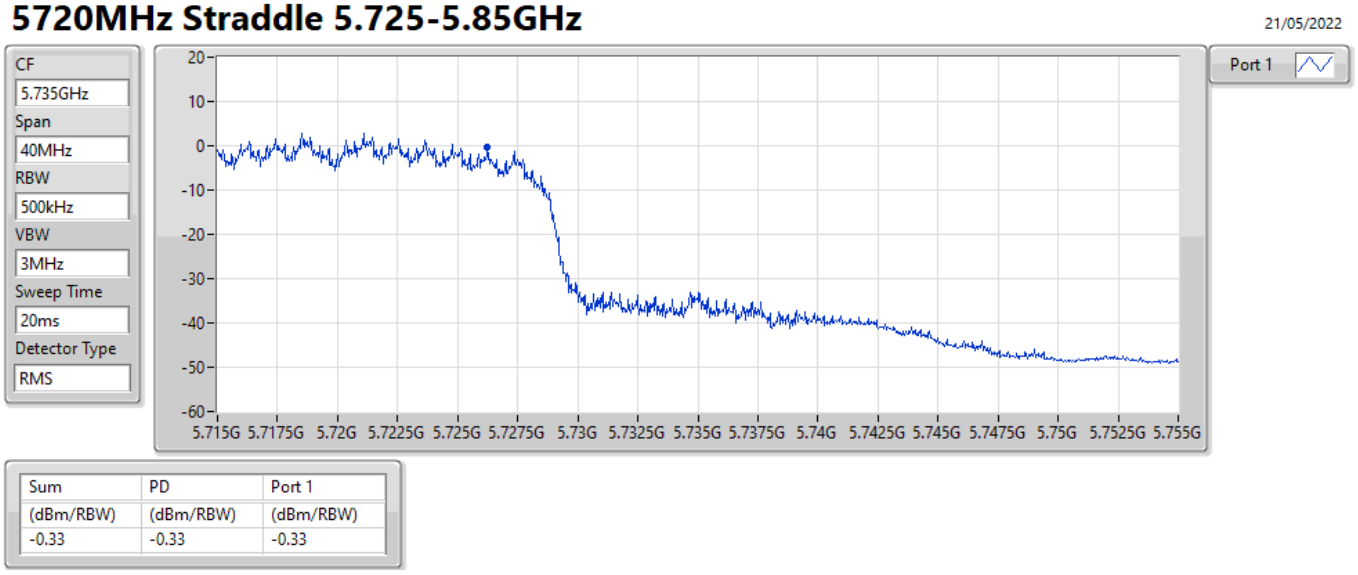

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.33	-0.33	-0.33

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5745MHz

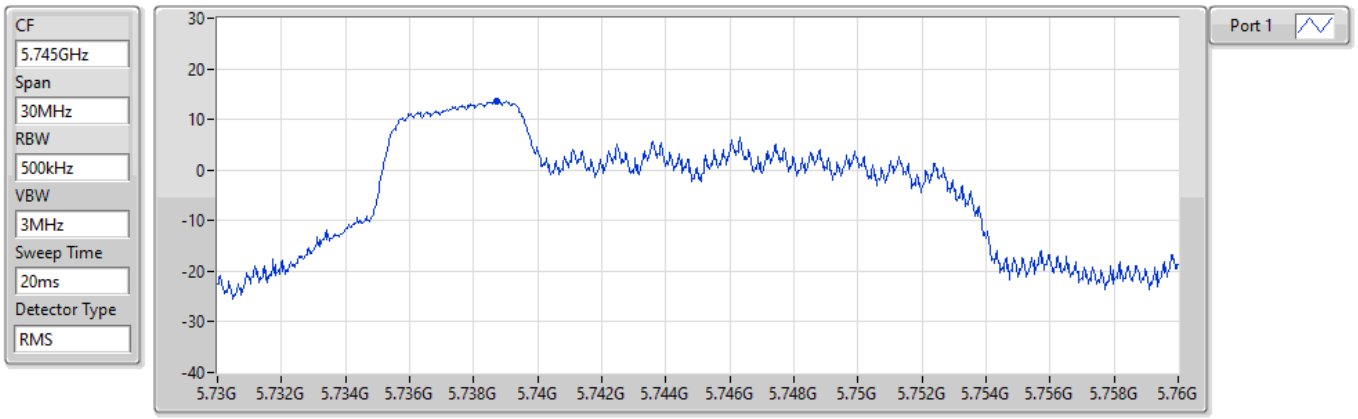

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.65	13.65	13.65

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5785MHz

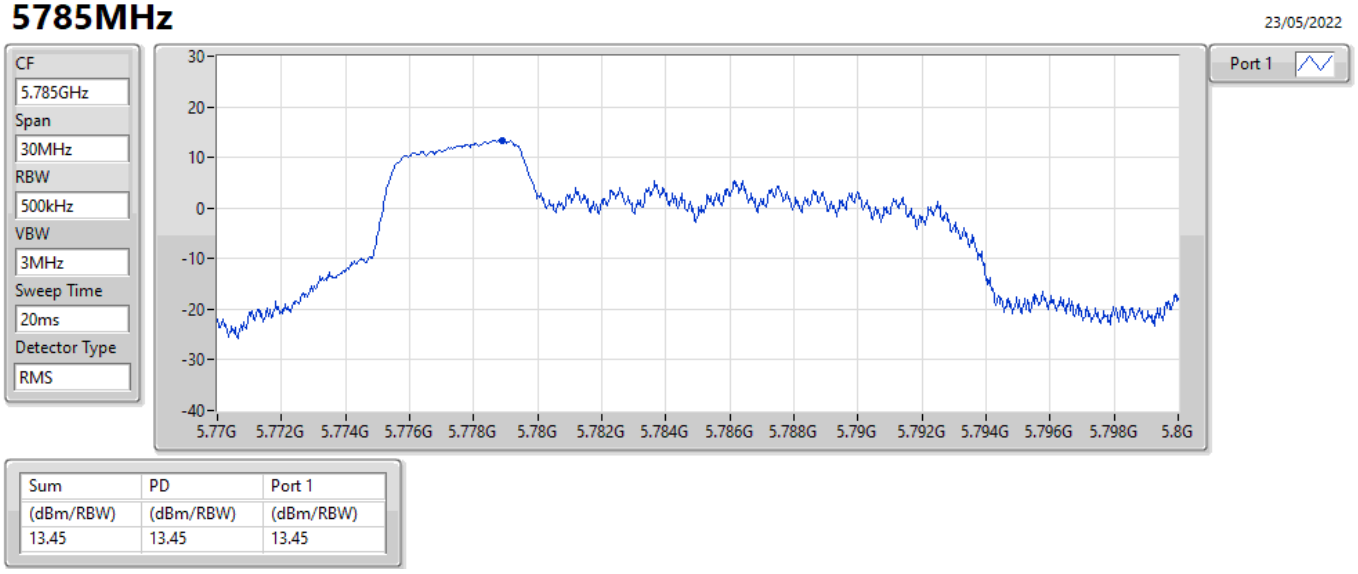

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.45	13.45	13.45

802.11ax HEW20_Nss1,(MCS0)_1TX PSD

5825MHz

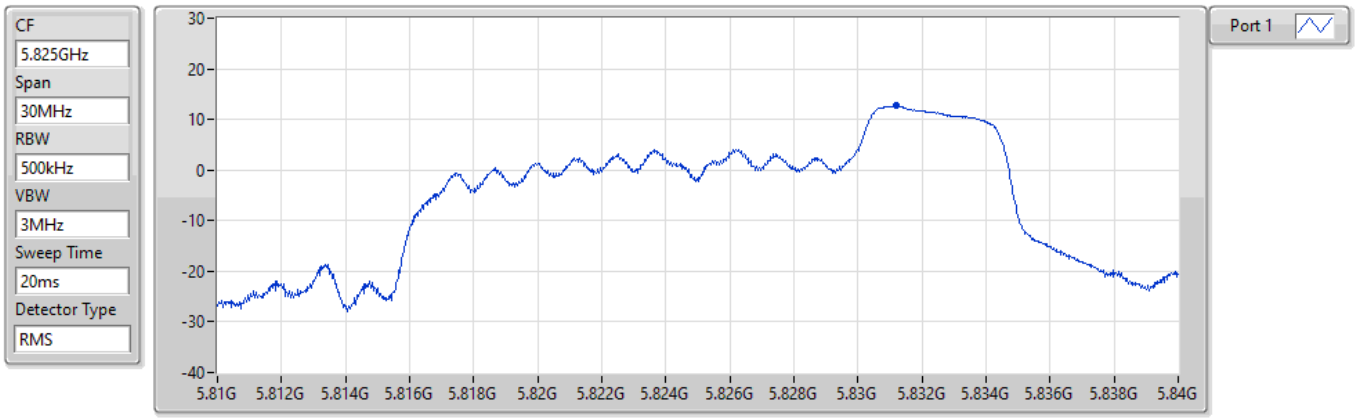

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.80	12.80	12.80

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.96
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.94
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.97
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	13.01

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	5.00	10.90	10.90	11.00
5200MHz	Pass	5.00	10.95	10.95	11.00
5240MHz	Pass	5.00	10.96	10.96	11.00
5260MHz	Pass	5.00	10.92	10.92	11.00
5300MHz	Pass	5.00	10.88	10.88	11.00
5320MHz	Pass	5.00	10.94	10.94	11.00
5500MHz	Pass	5.00	10.96	10.96	11.00
5580MHz	Pass	5.00	10.94	10.94	11.00
5700MHz	Pass	5.00	10.78	10.78	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	10.97	10.97	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	-1.72	-1.72	30.00
5745MHz	Pass	5.00	13.01	13.01	30.00
5785MHz	Pass	5.00	12.78	12.78	30.00
5825MHz	Pass	5.00	12.04	12.04	30.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5180MHz

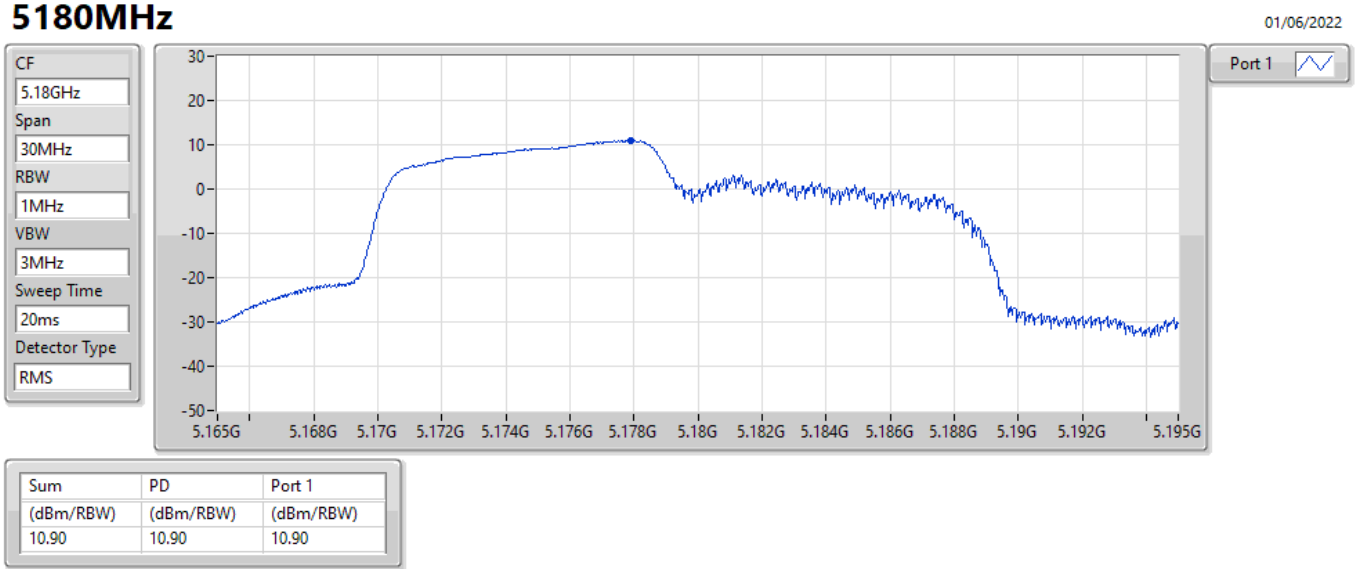

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.90	10.90	10.90

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5200MHz

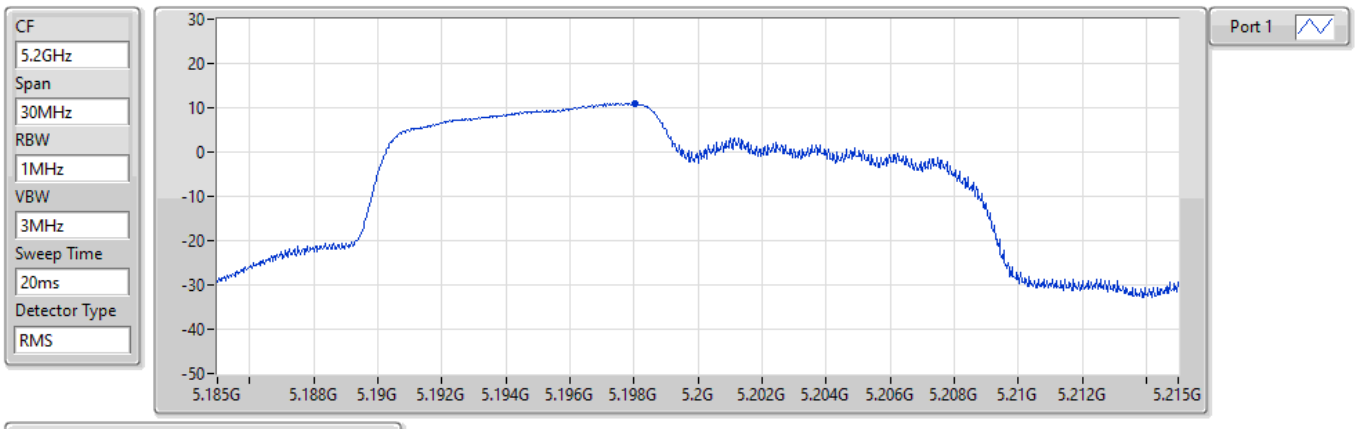

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.95	10.95	10.95

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5240MHz

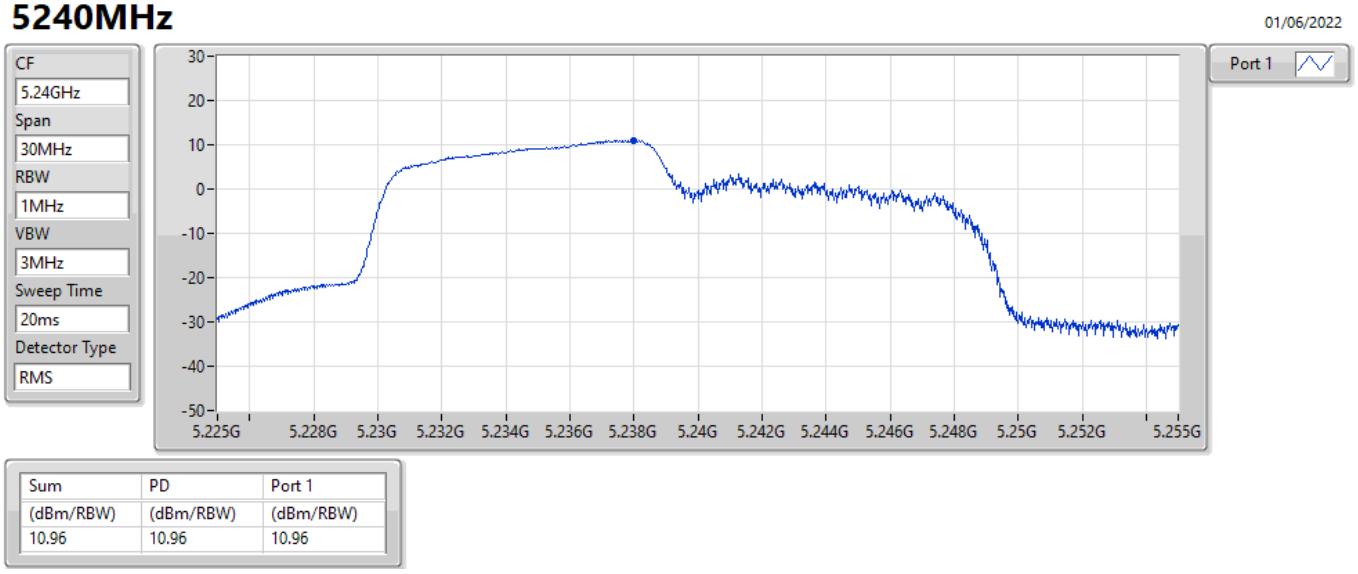

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.96	10.96	10.96

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5260MHz

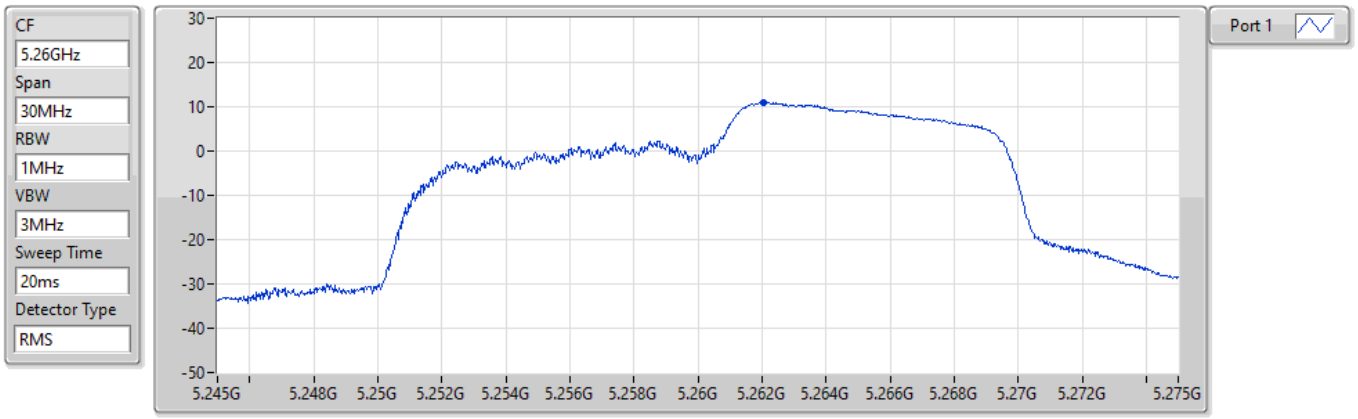

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.92	10.92	10.92

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5300MHz

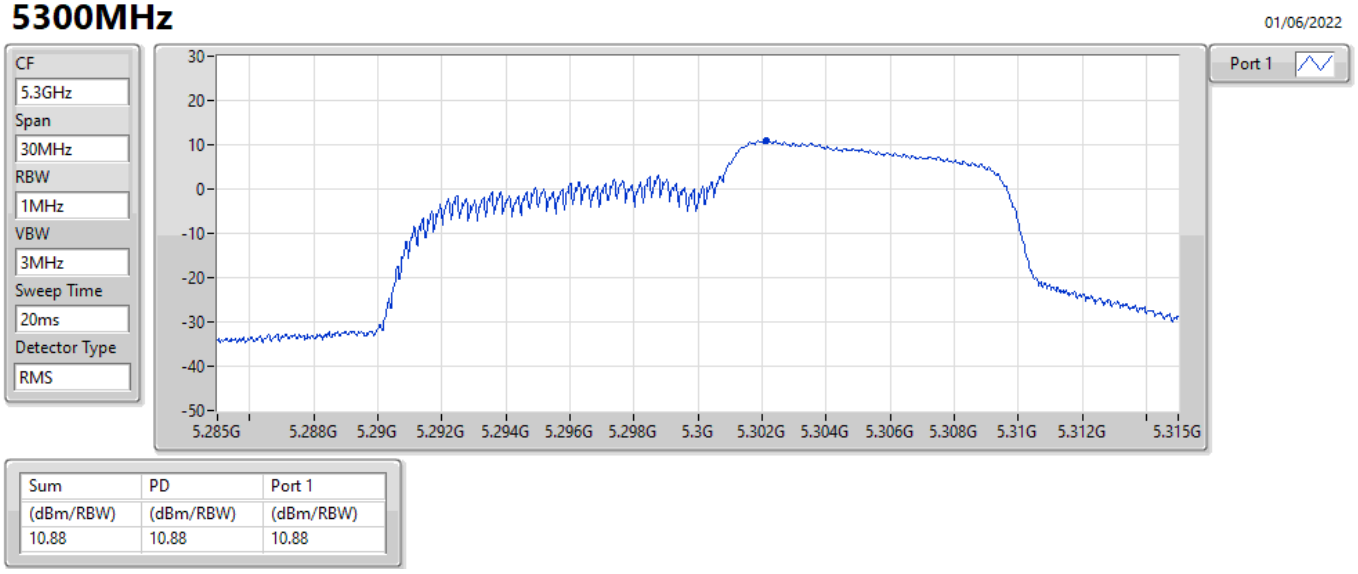

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.88	10.88	10.88

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5320MHz

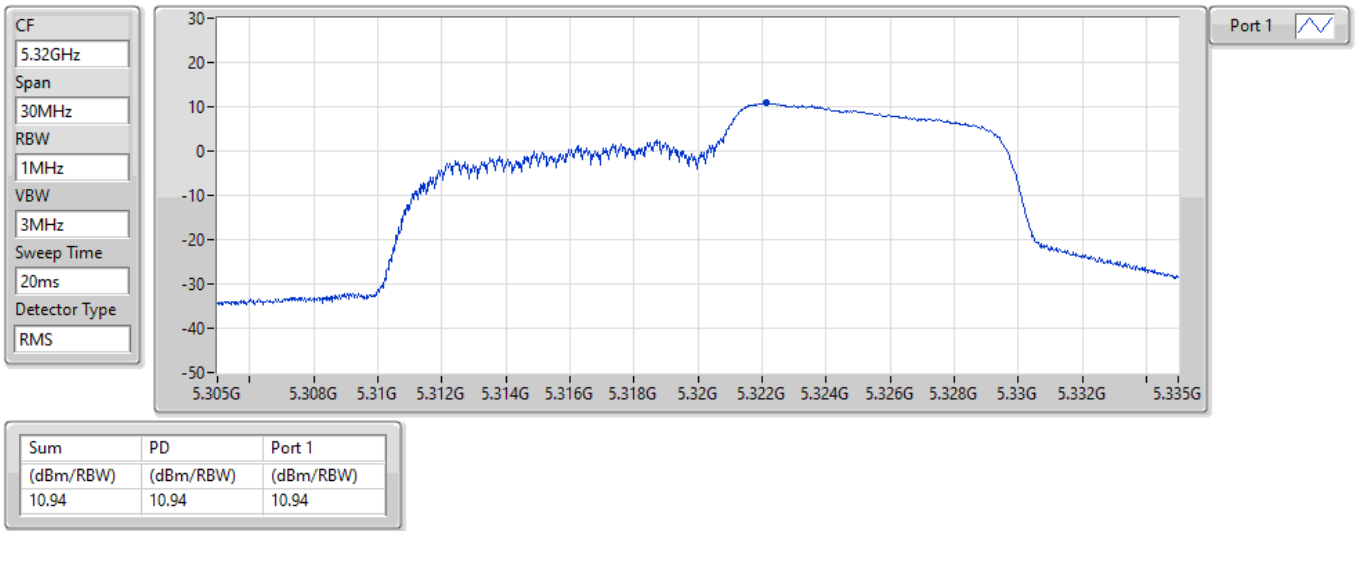

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.94	10.94	10.94

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5500MHz

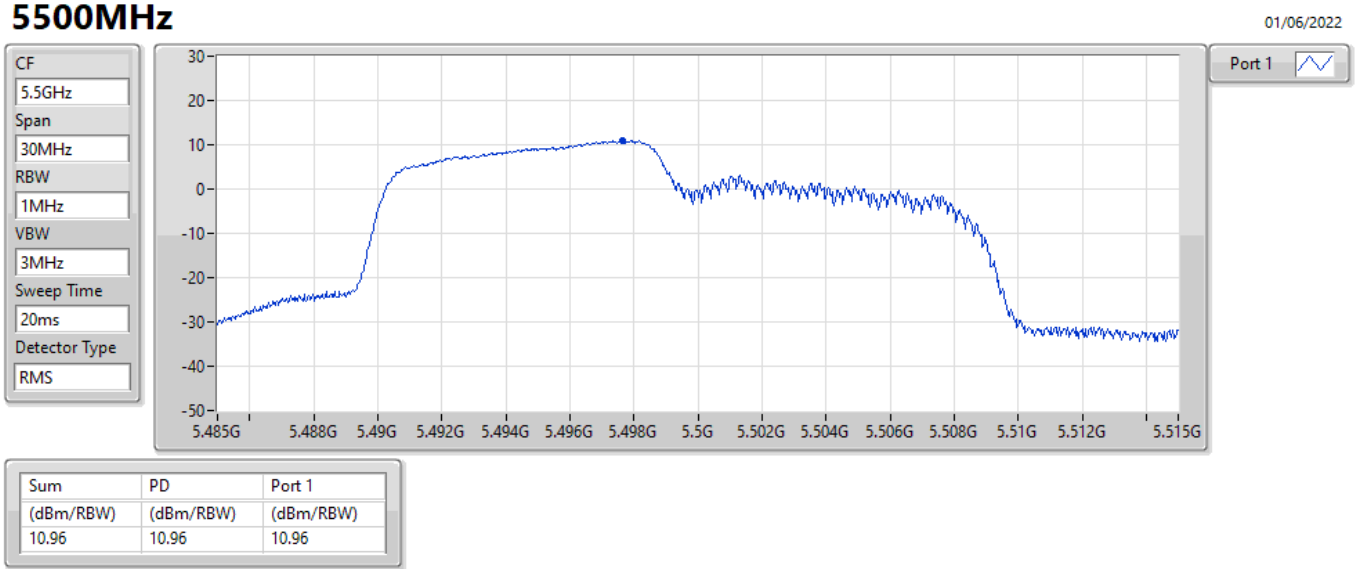

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.96	10.96	10.96

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5580MHz

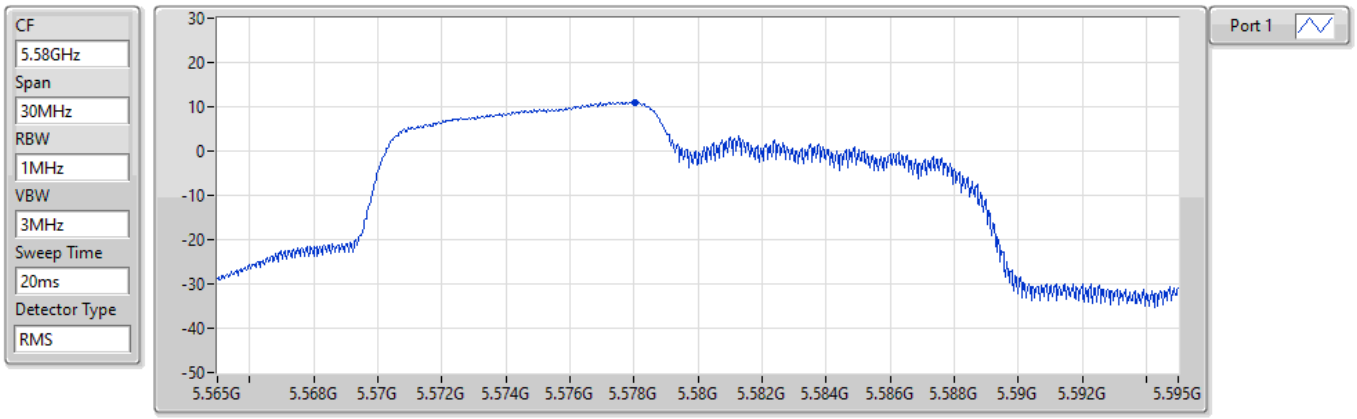

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.94	10.94	10.94

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5700MHz

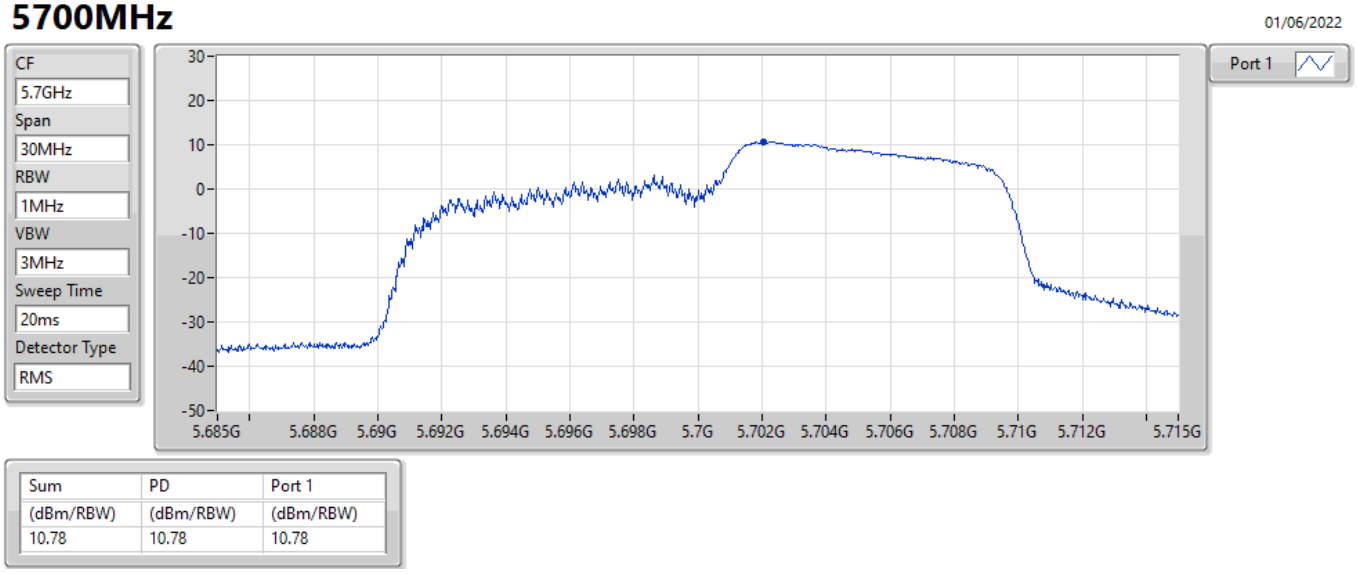

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.78	10.78	10.78

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.47-5.725GHz

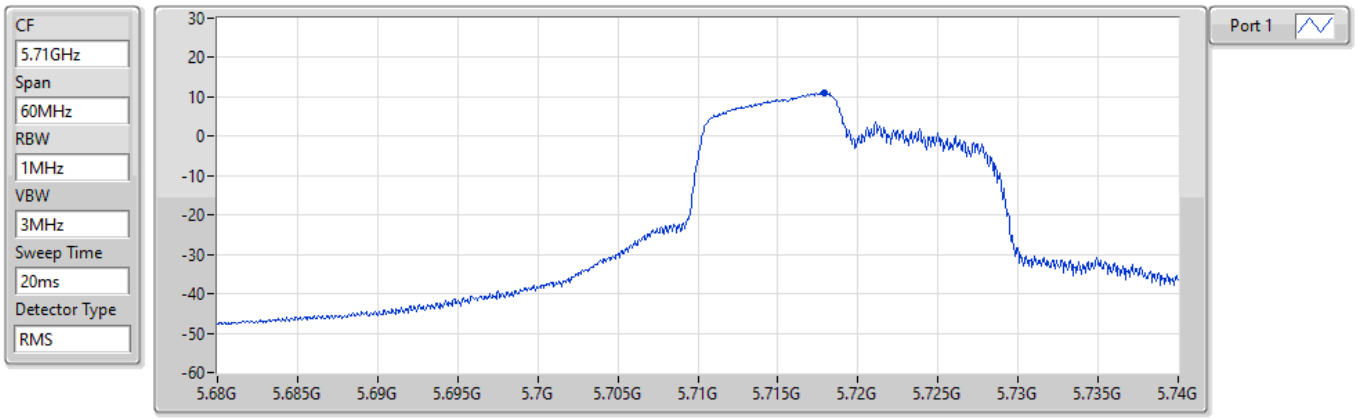

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.97	10.97	10.97

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.725-5.85GHz

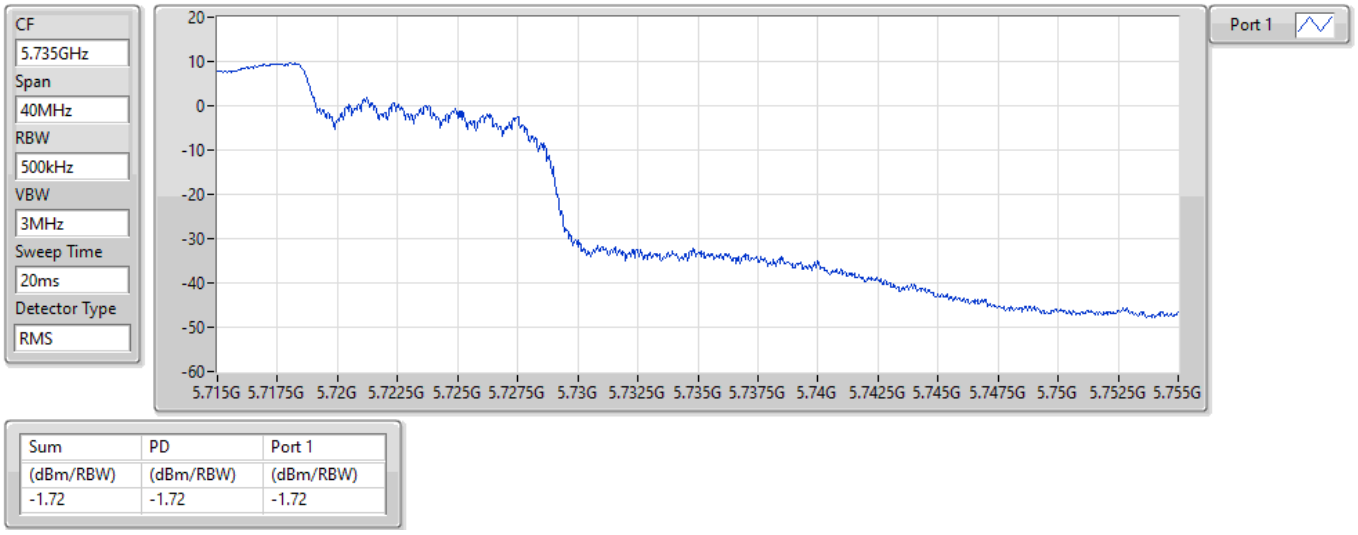

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-1.72	-1.72	-1.72

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5745MHz

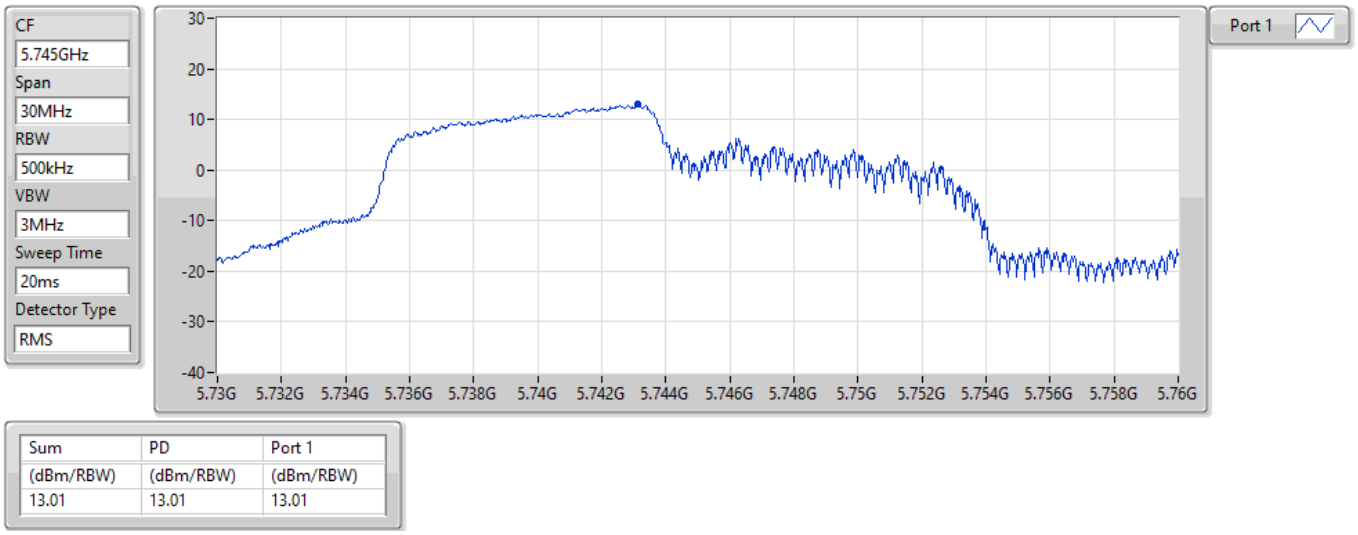

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.01	13.01	13.01

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5785MHz

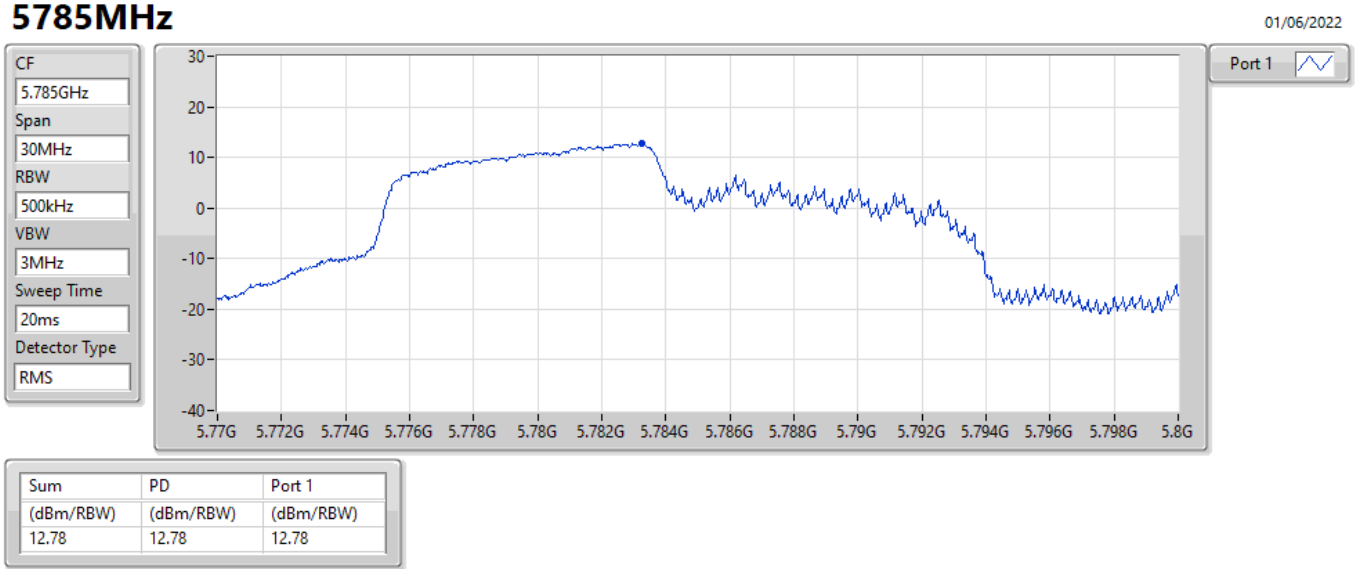

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.78	12.78	12.78

802.11ax HEW20_Nss1,(MCS0)_1TX PSD

5825MHz

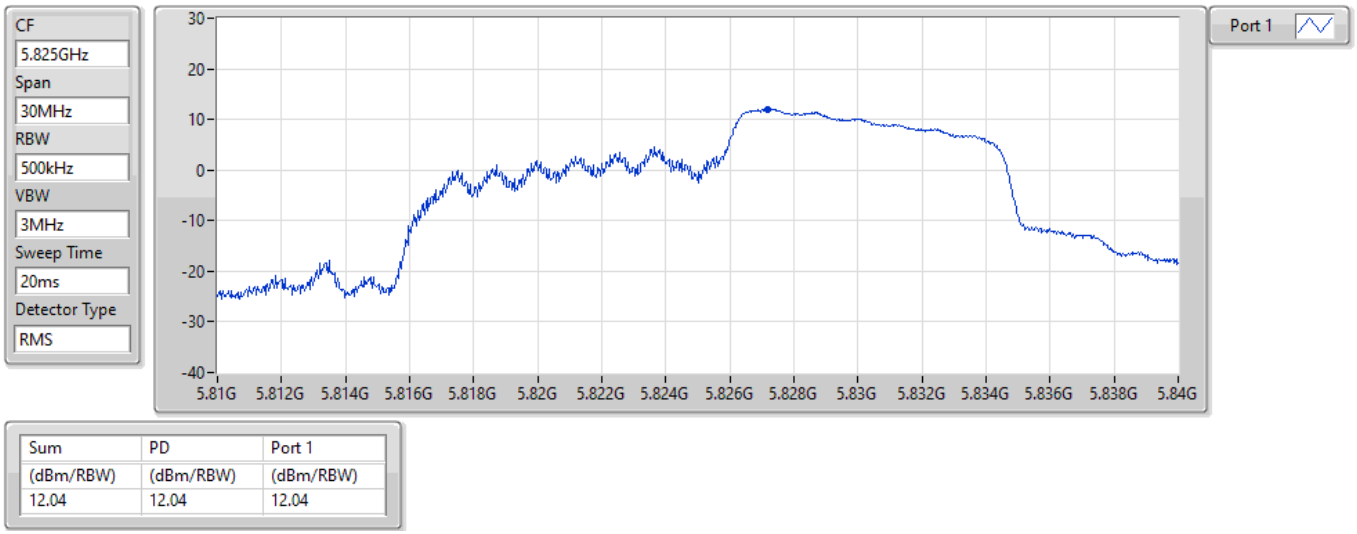

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.04	12.04	12.04

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.82
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.99
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.92
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	12.81

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	5.00	10.78	10.78	11.00
5200MHz	Pass	5.00	10.80	10.80	11.00
5240MHz	Pass	5.00	10.82	10.82	11.00
5260MHz	Pass	5.00	10.93	10.93	11.00
5300MHz	Pass	5.00	10.77	10.77	11.00
5320MHz	Pass	5.00	10.99	10.99	11.00
5500MHz	Pass	5.00	10.88	10.88	11.00
5580MHz	Pass	5.00	10.92	10.92	11.00
5700MHz	Pass	5.00	9.00	9.00	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	10.81	10.81	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	-13.12	-13.12	30.00
5745MHz	Pass	5.00	12.81	12.81	30.00
5785MHz	Pass	5.00	11.62	11.62	30.00
5825MHz	Pass	5.00	11.53	11.53	30.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5180MHz

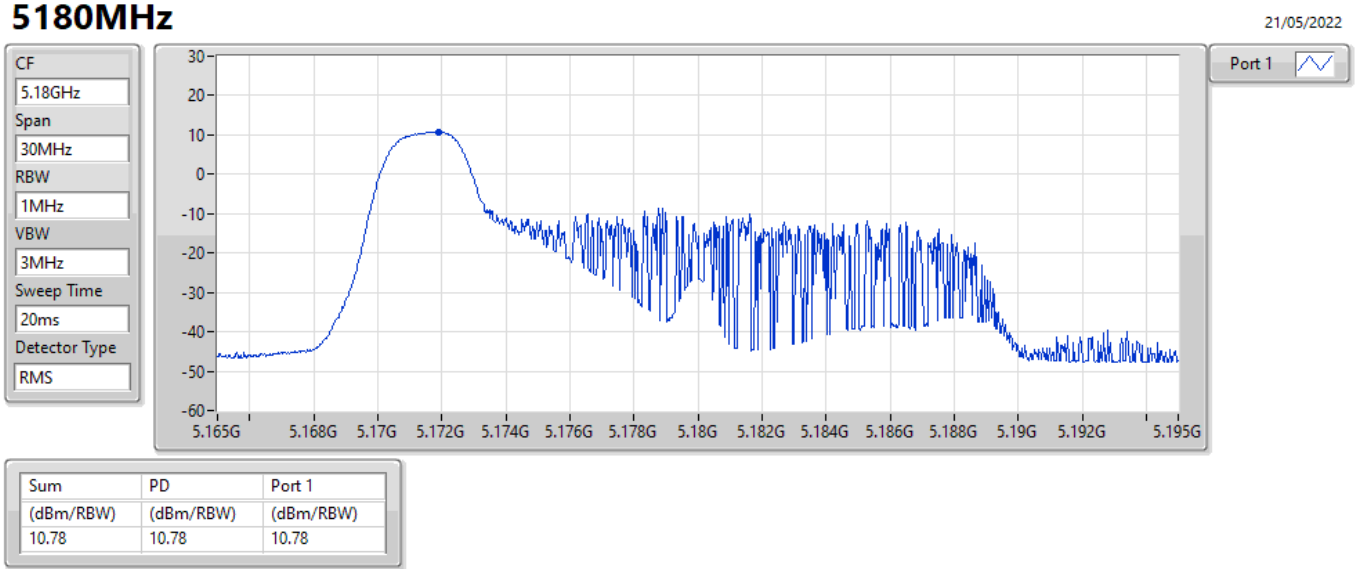

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.78	10.78	10.78

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5200MHz

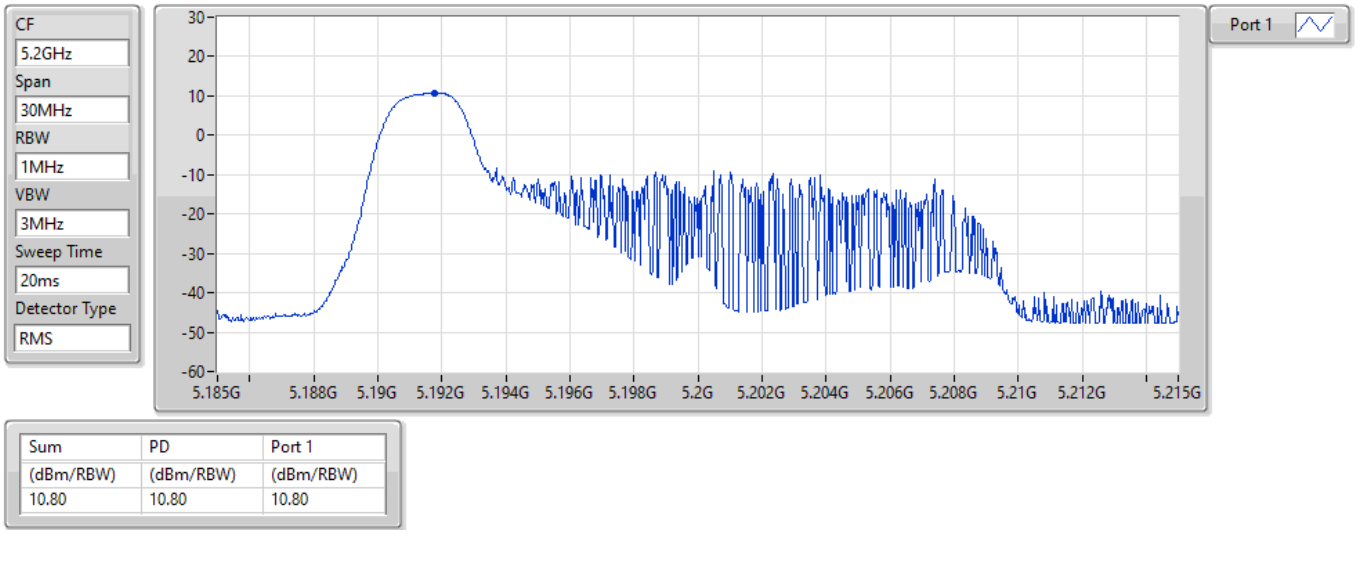

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.80	10.80	10.80

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5240MHz

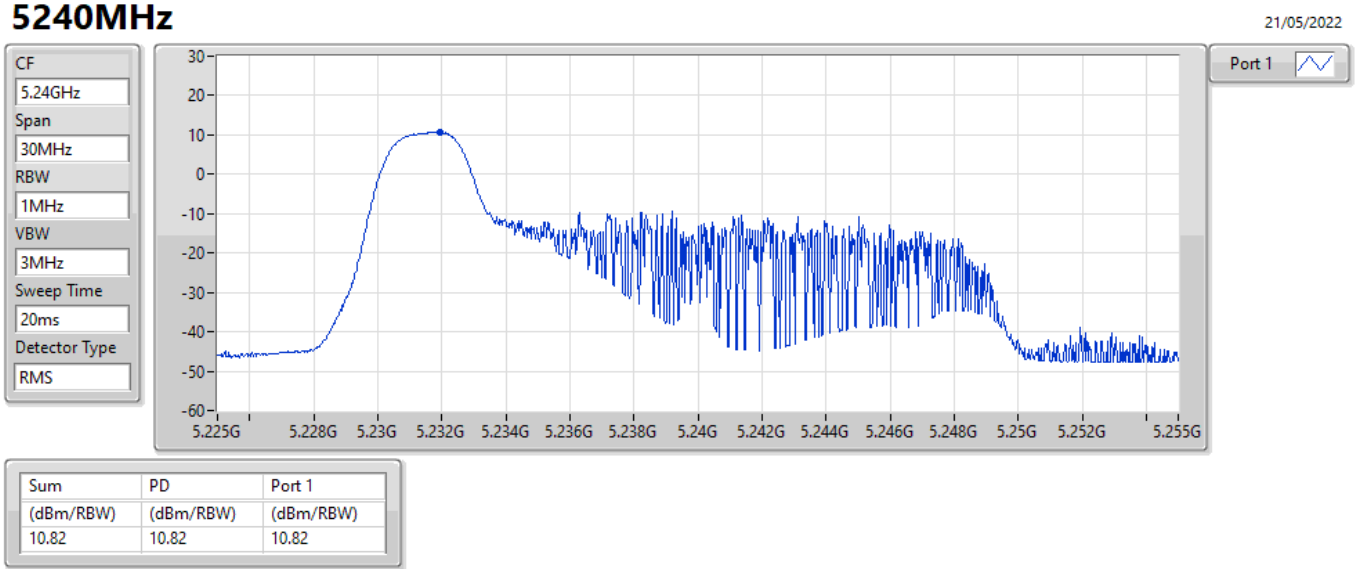

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.82	10.82	10.82

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5260MHz

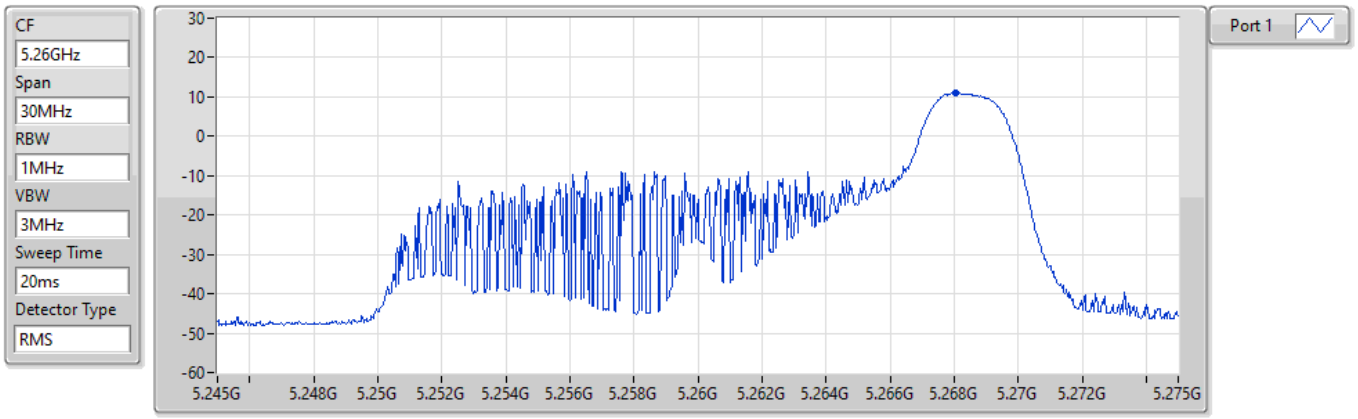

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.93	10.93	10.93

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5300MHz

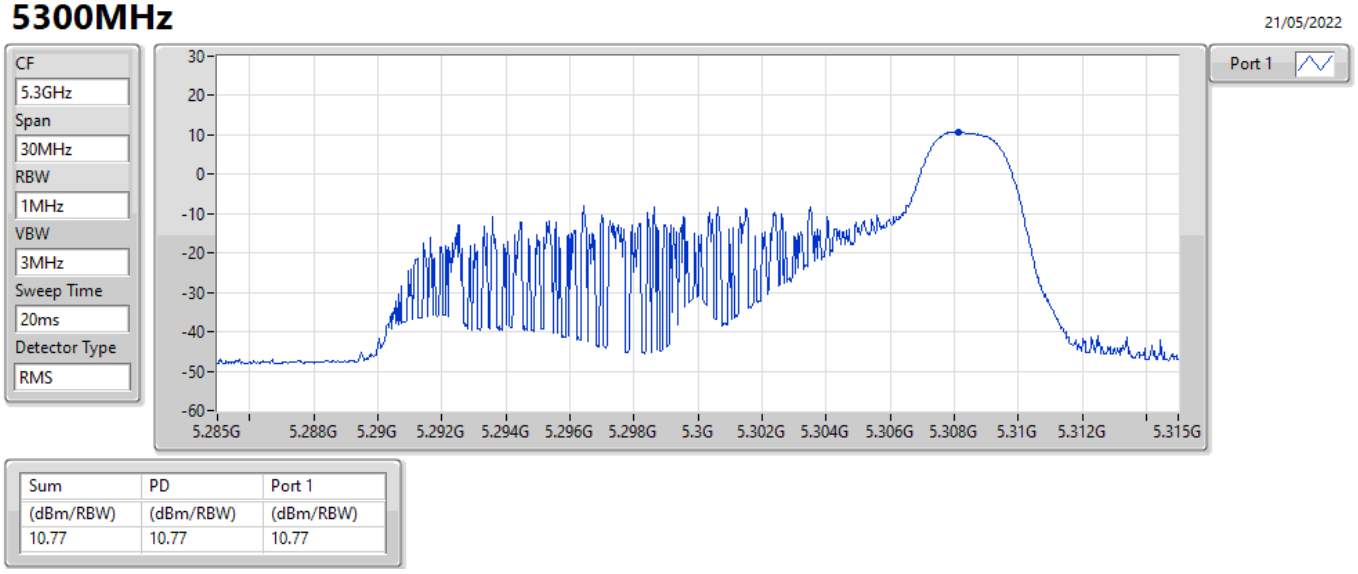

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.77	10.77	10.77

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5320MHz

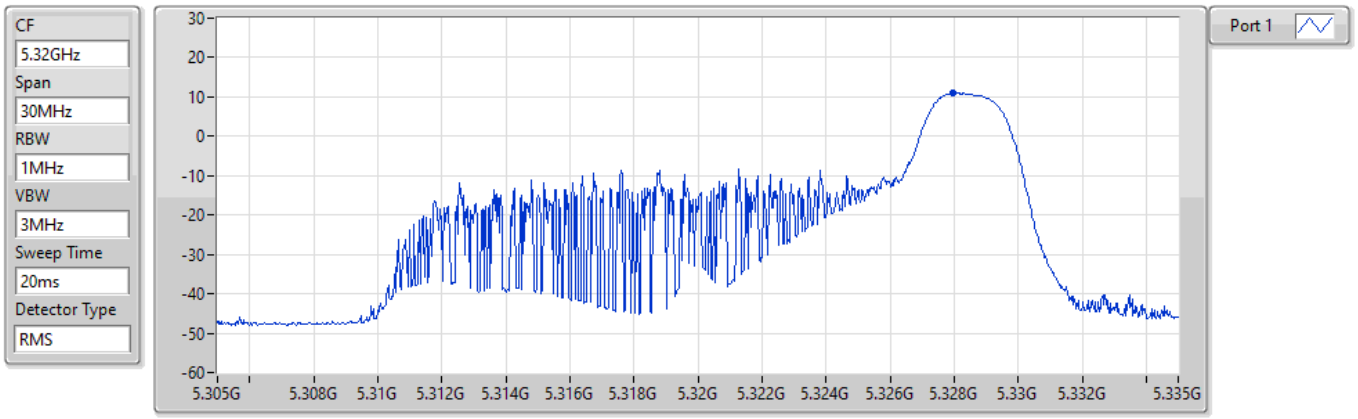

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.99	10.99	10.99

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5500MHz

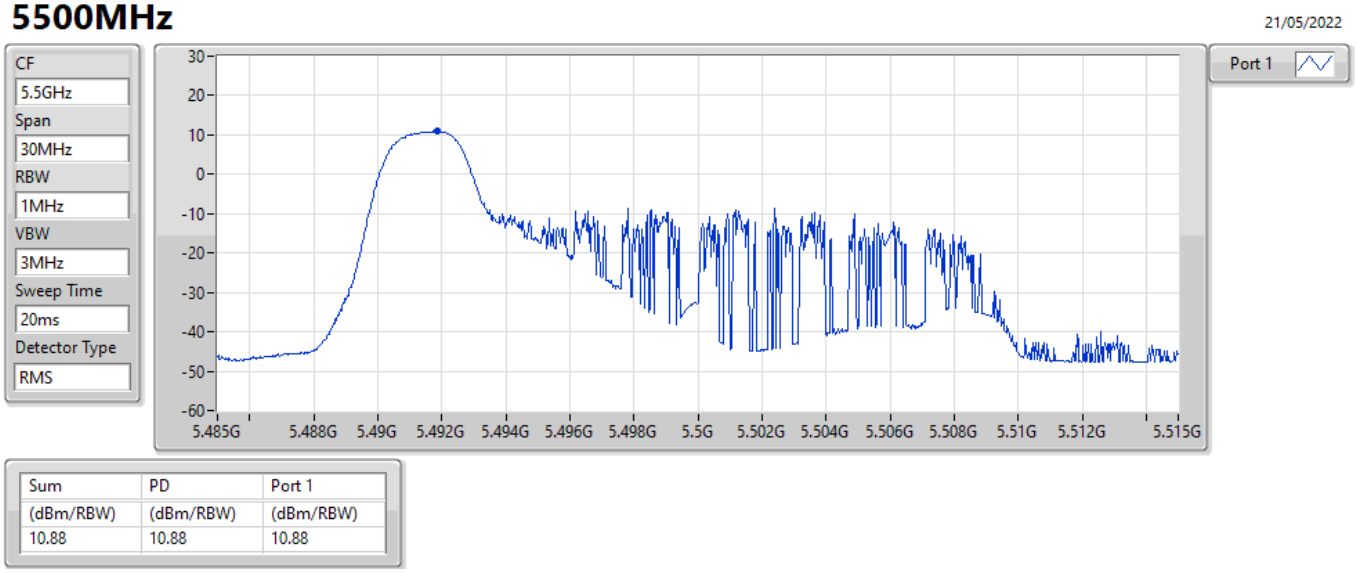

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.88	10.88	10.88

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5580MHz

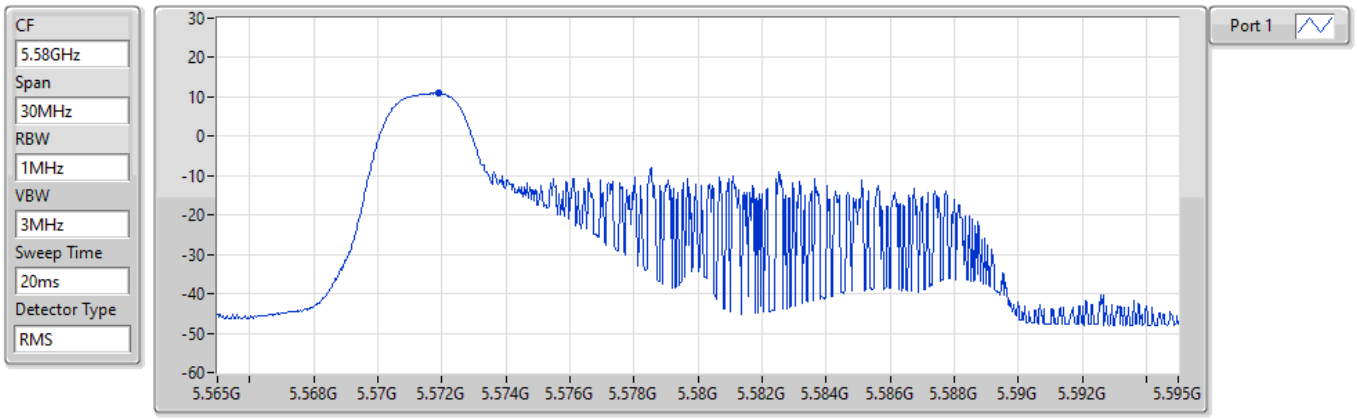

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.92	10.92	10.92

802.11ax HEW20_Nss1,(MCS0)_1TX **PSD**


5700MHz

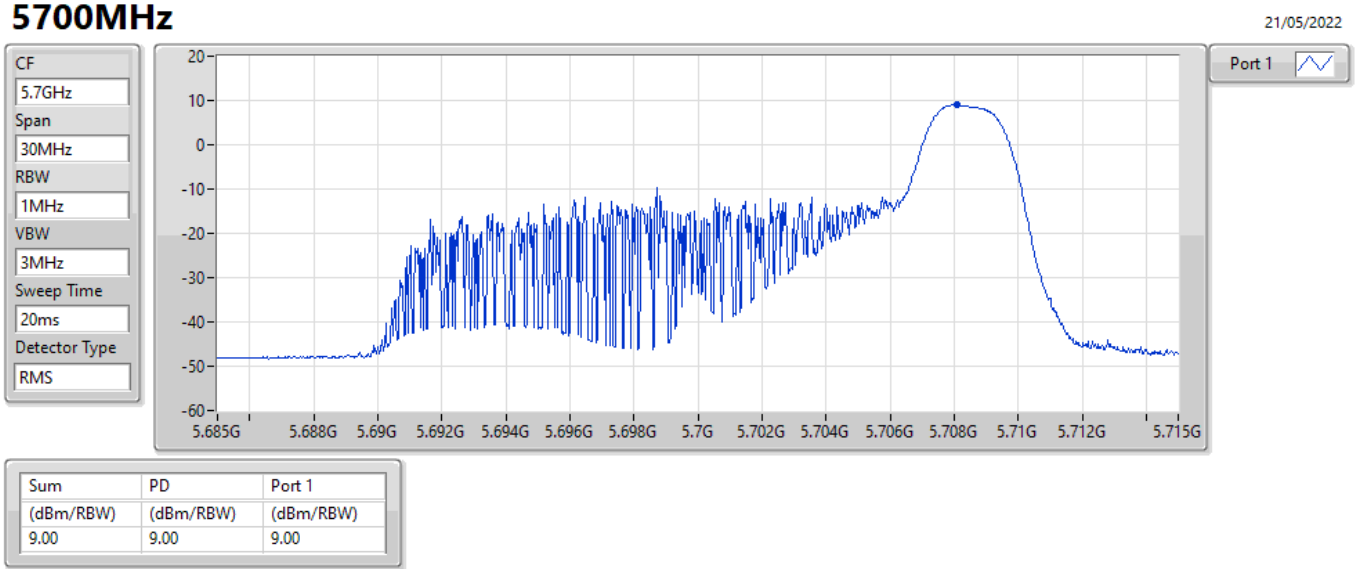

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.00	9.00	9.00

802.11ax HEW20_Nss1,(MCS0)_1TX **PSD**


5720MHz Straddle 5.47-5.725GHz

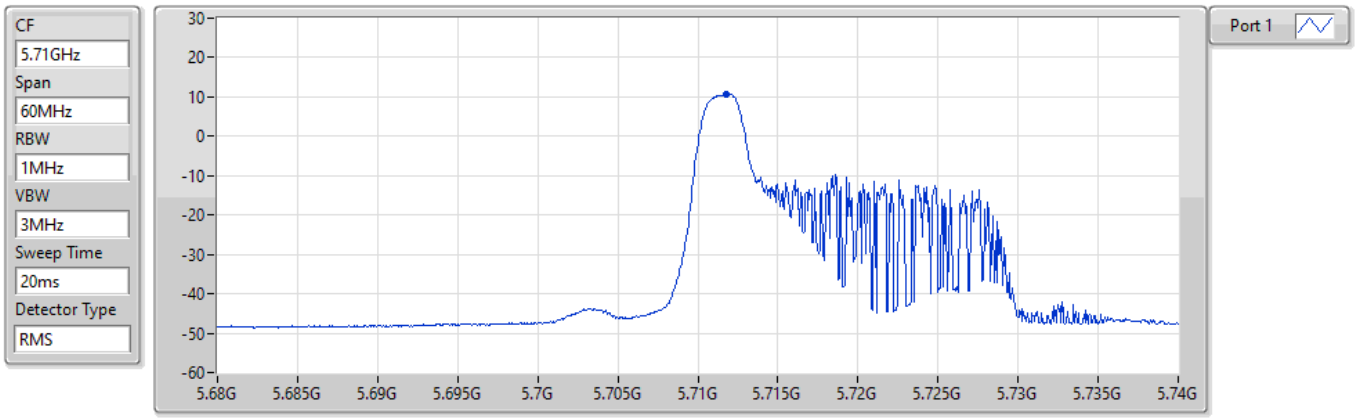

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.81	10.81	10.81

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.725-5.85GHz

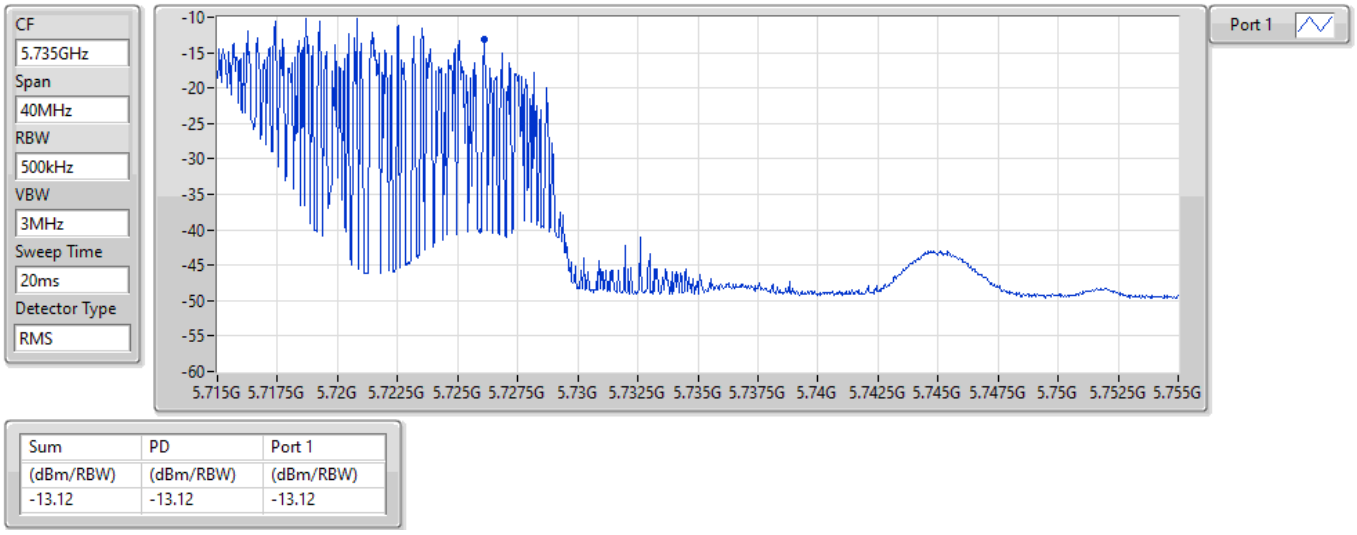

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.12	-13.12	-13.12

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5745MHz

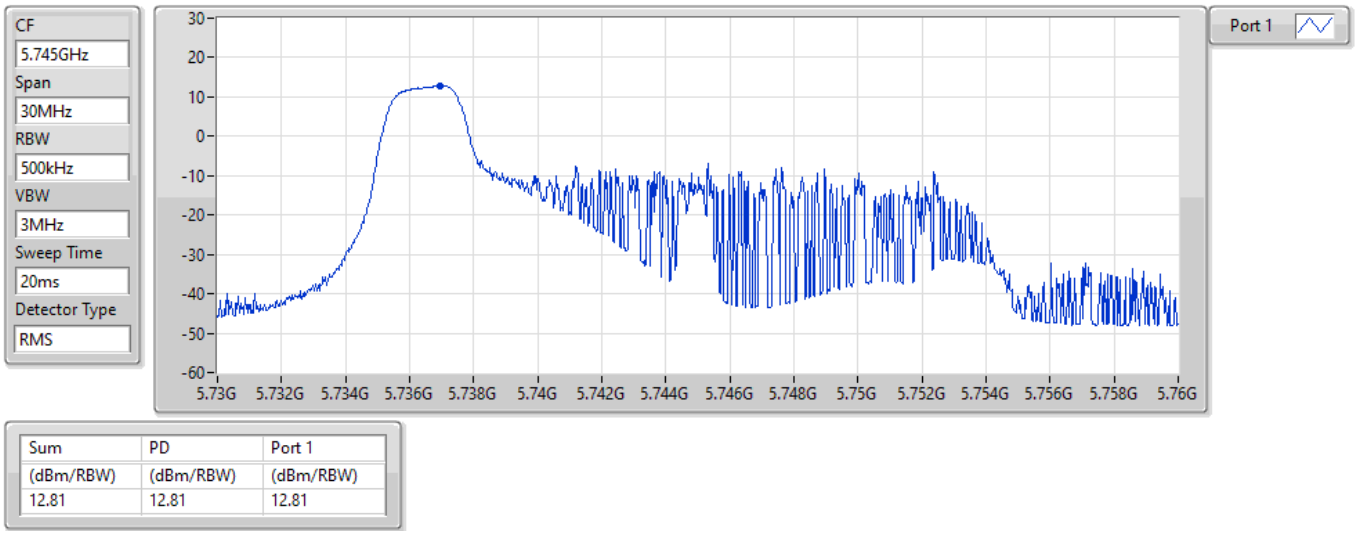

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.81	12.81	12.81

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5785MHz

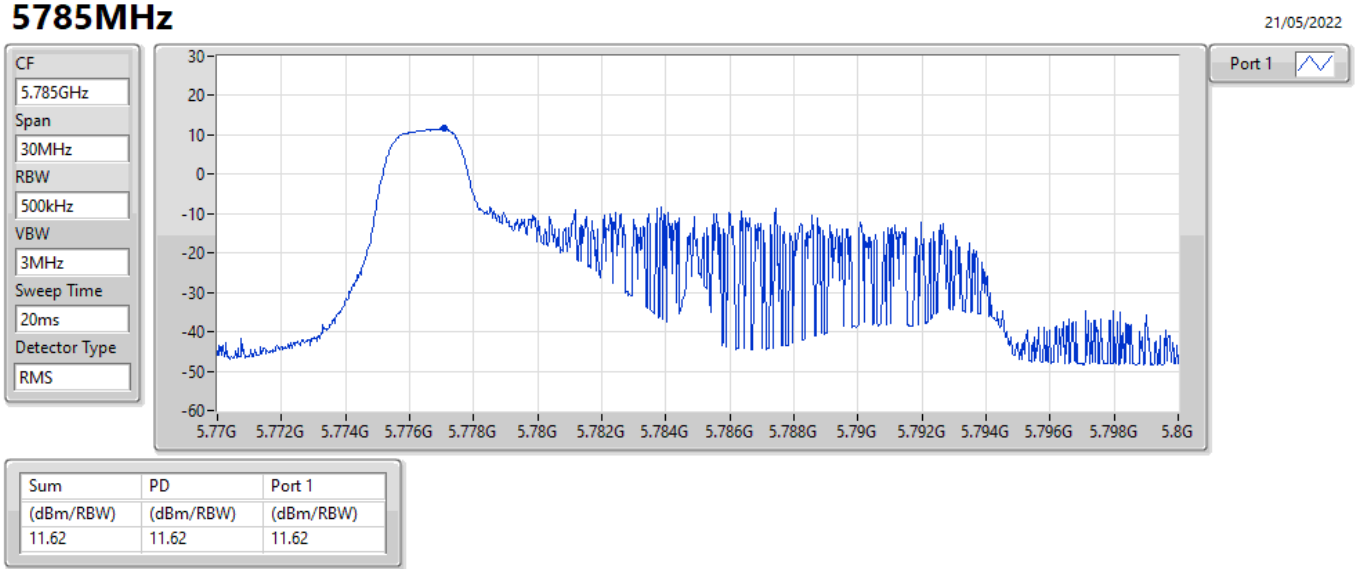

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.62	11.62	11.62

802.11ax HEW20_Nss1,(MCS0)_1TX PSD

5825MHz

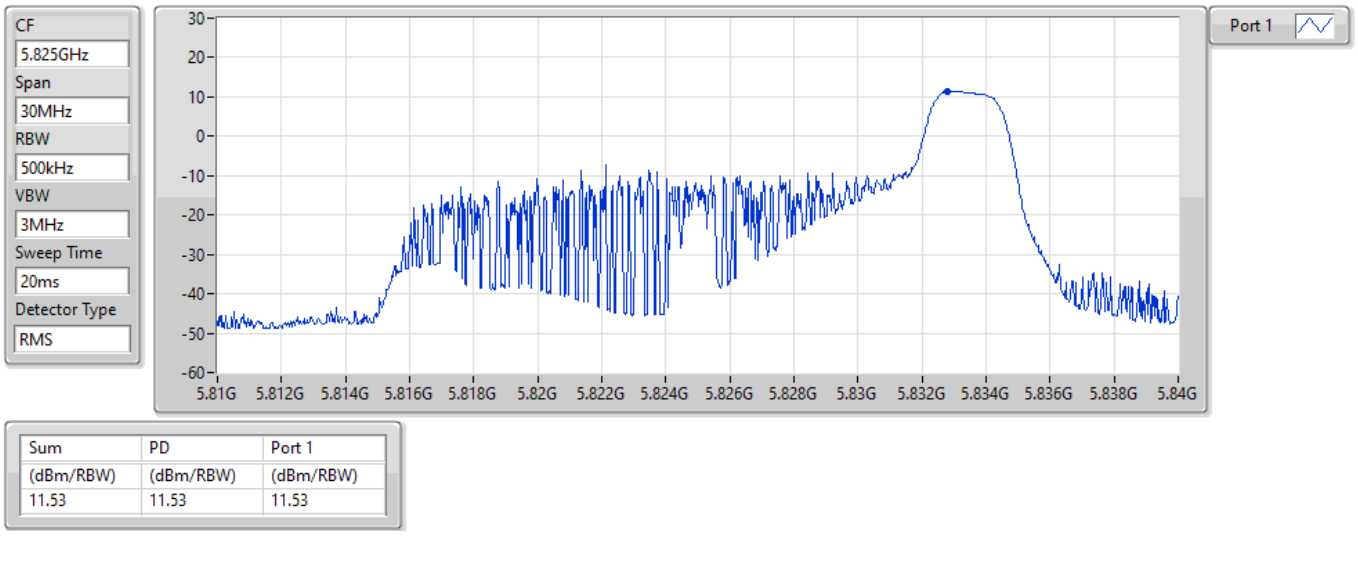

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.53	11.53	11.53

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.97
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.92
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.98
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	12.67

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	5.00	10.92	10.92	11.00
5200MHz	Pass	5.00	10.94	10.94	11.00
5240MHz	Pass	5.00	10.97	10.97	11.00
5260MHz	Pass	5.00	10.88	10.88	11.00
5300MHz	Pass	5.00	10.82	10.82	11.00
5320MHz	Pass	5.00	10.92	10.92	11.00
5500MHz	Pass	5.00	10.90	10.90	11.00
5580MHz	Pass	5.00	10.97	10.97	11.00
5700MHz	Pass	5.00	9.31	9.31	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	10.98	10.98	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	-0.33	-0.33	30.00
5745MHz	Pass	5.00	12.67	12.67	30.00
5785MHz	Pass	5.00	10.91	10.91	30.00
5825MHz	Pass	5.00	11.20	11.20	30.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5180MHz

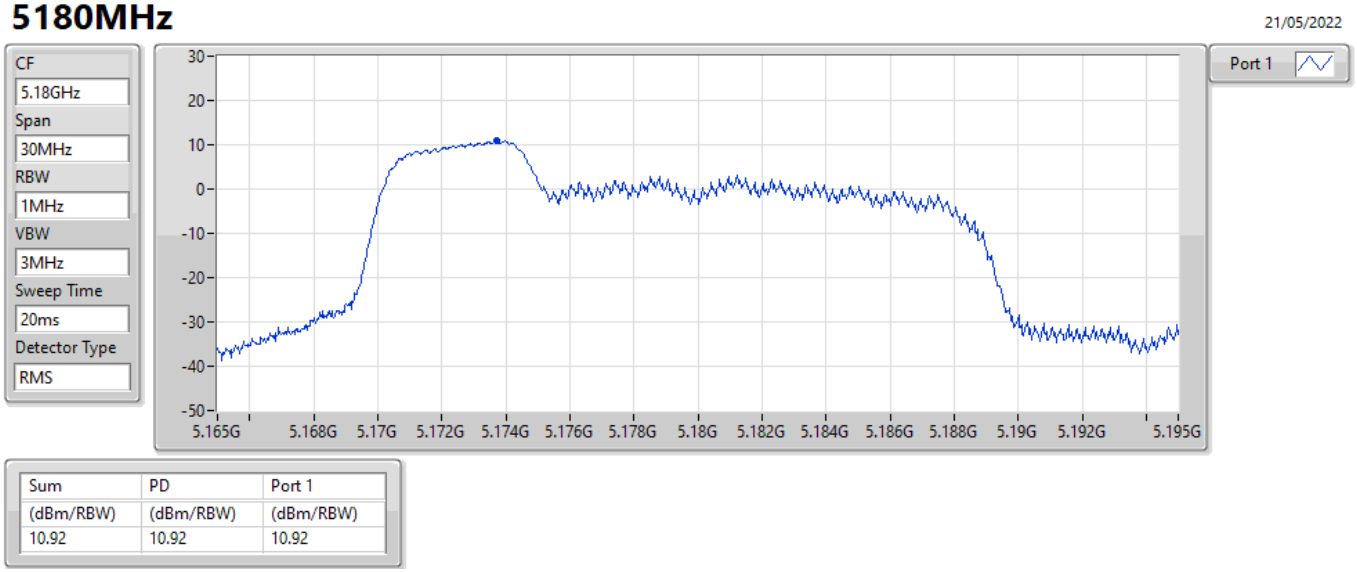

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.92	10.92	10.92

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5200MHz

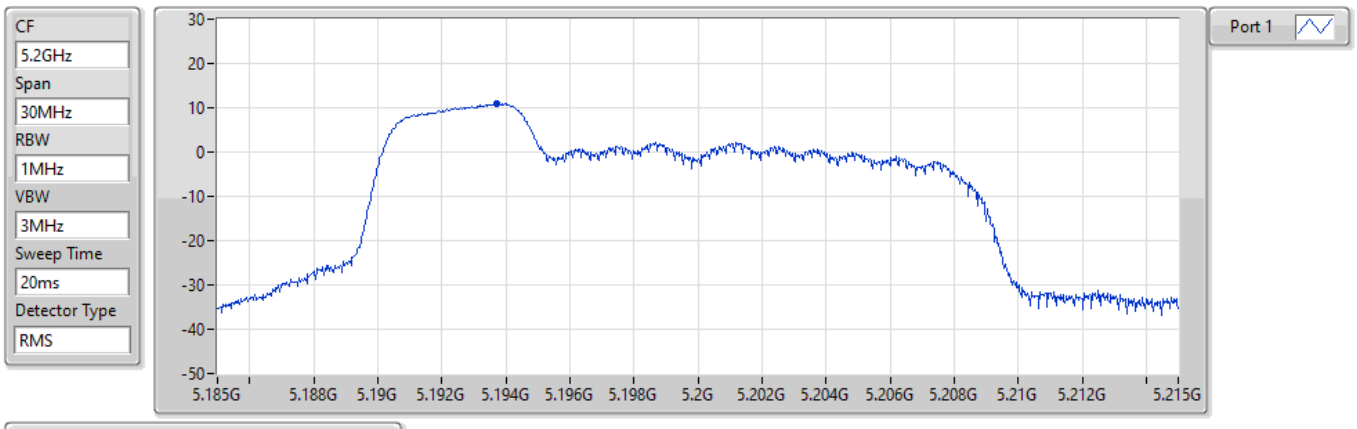

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.94	10.94	10.94

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5240MHz

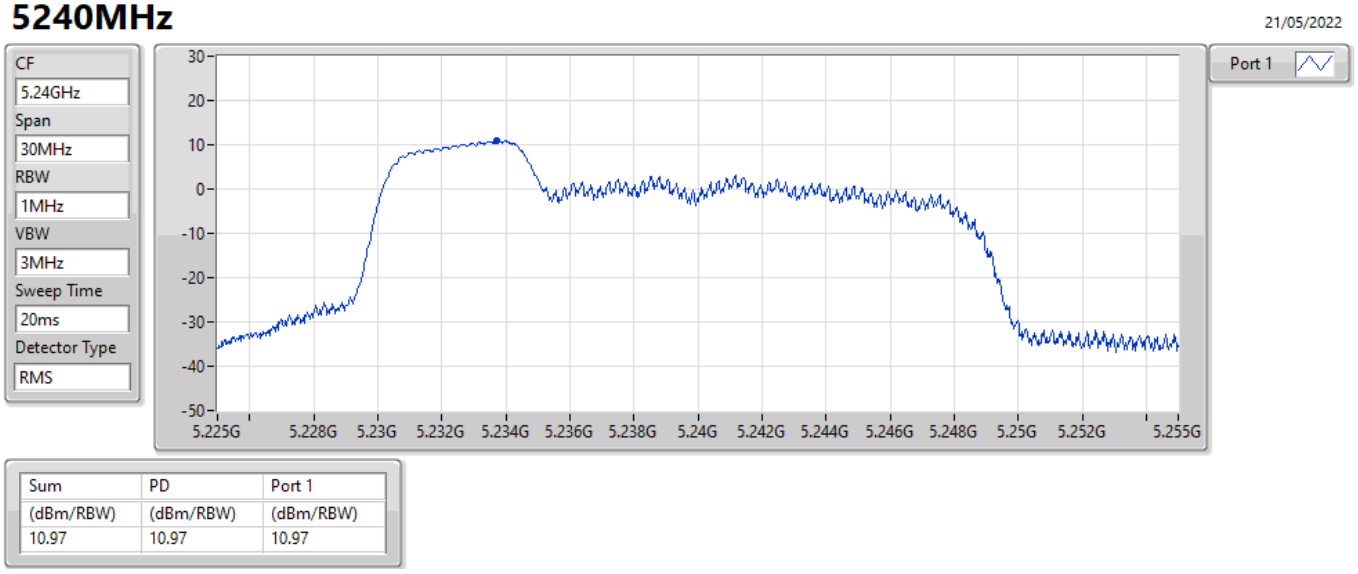

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.97	10.97	10.97

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5260MHz

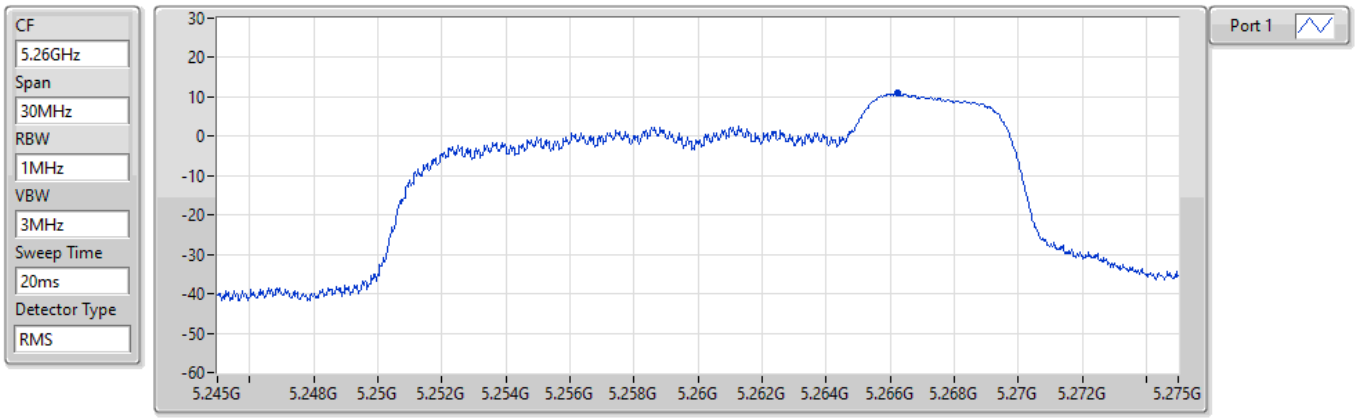

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.88	10.88	10.88

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5300MHz

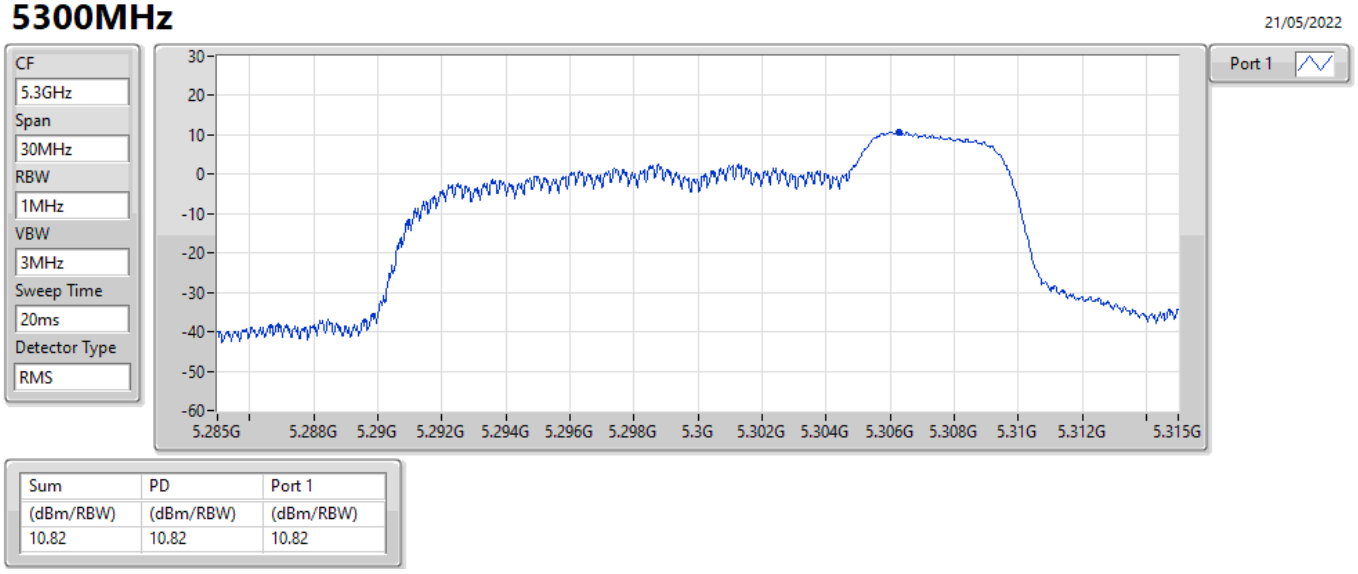

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.82	10.82	10.82

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5320MHz

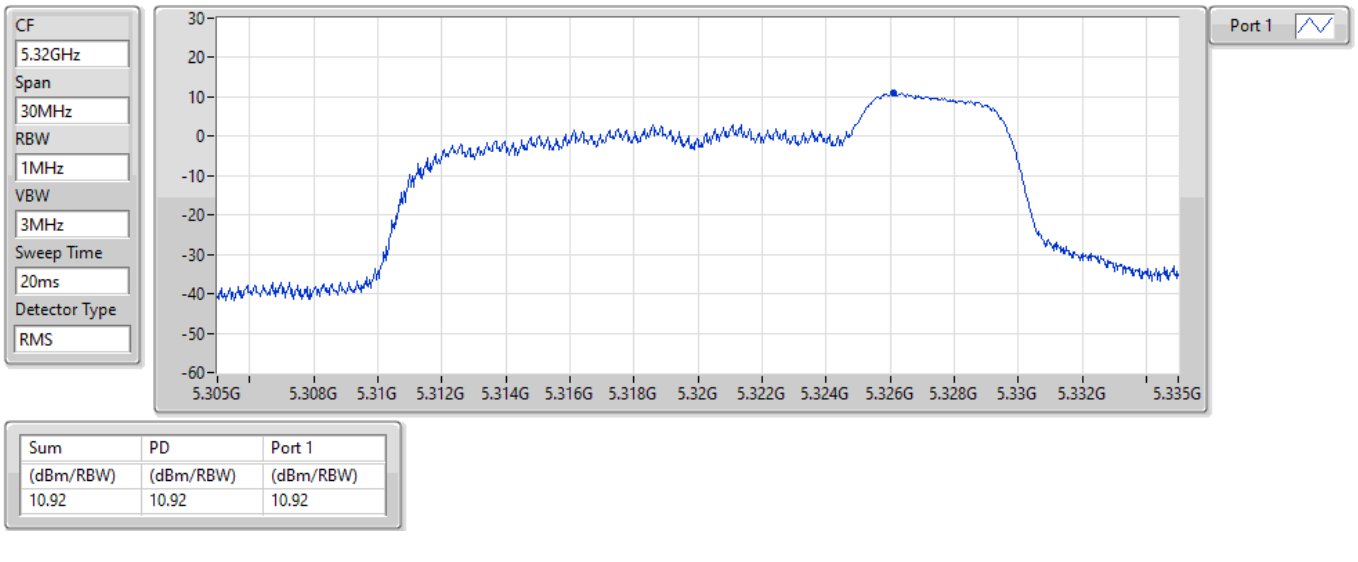

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.92	10.92	10.92

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5500MHz

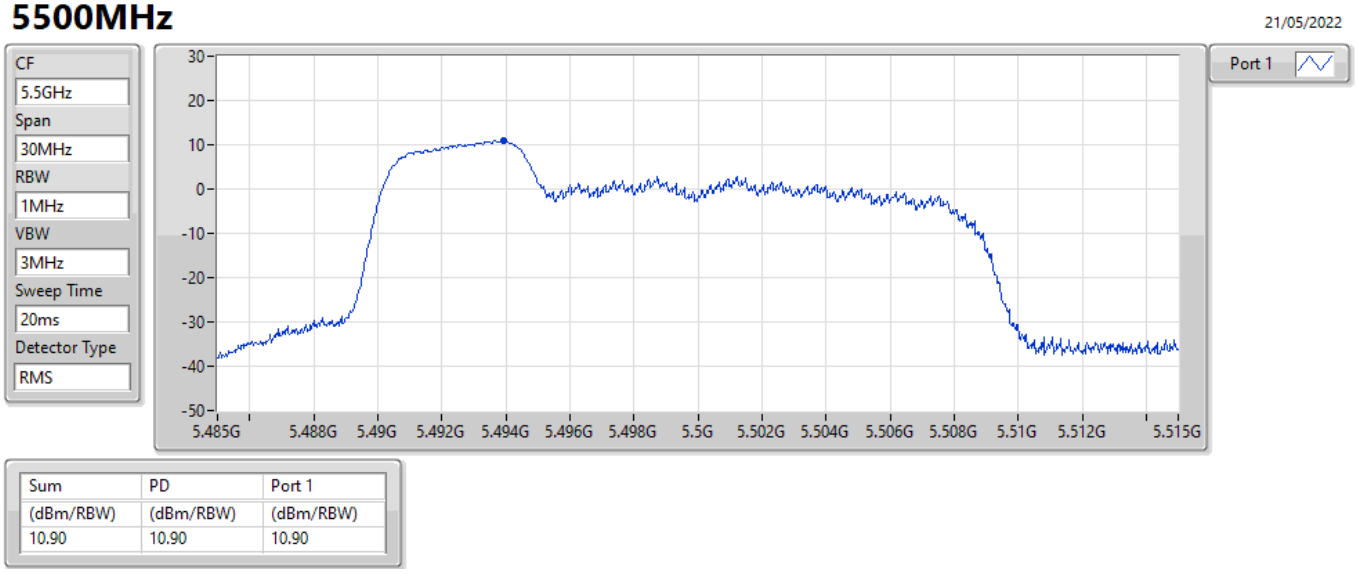

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.90	10.90	10.90

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5580MHz

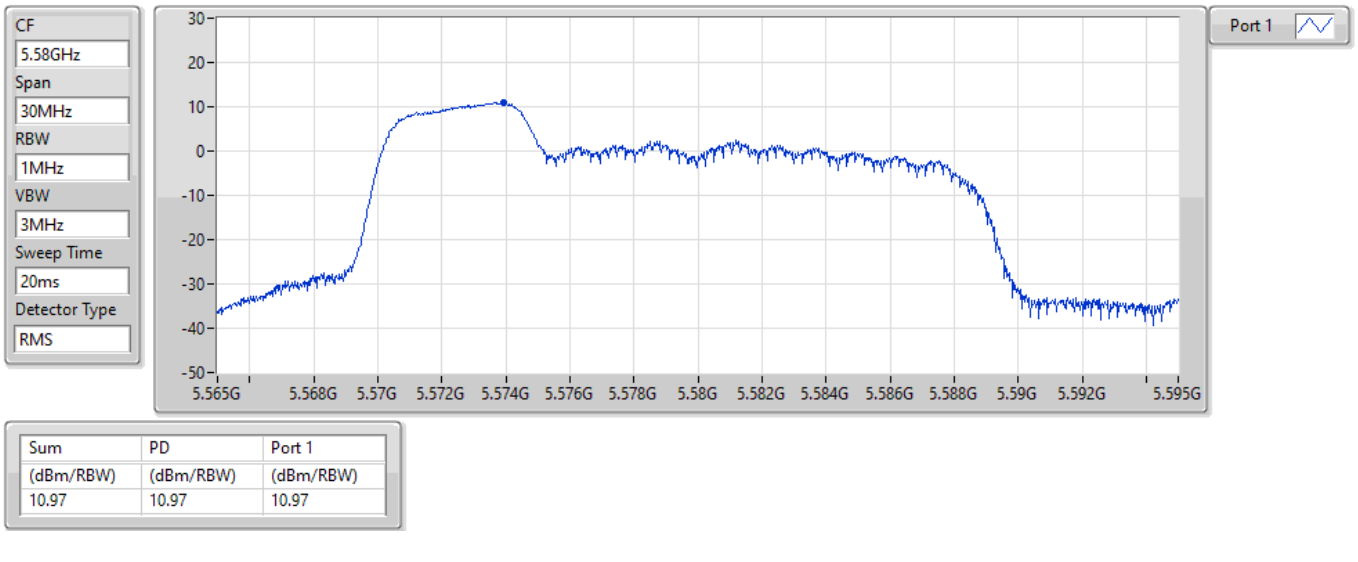

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.97	10.97	10.97

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5700MHz

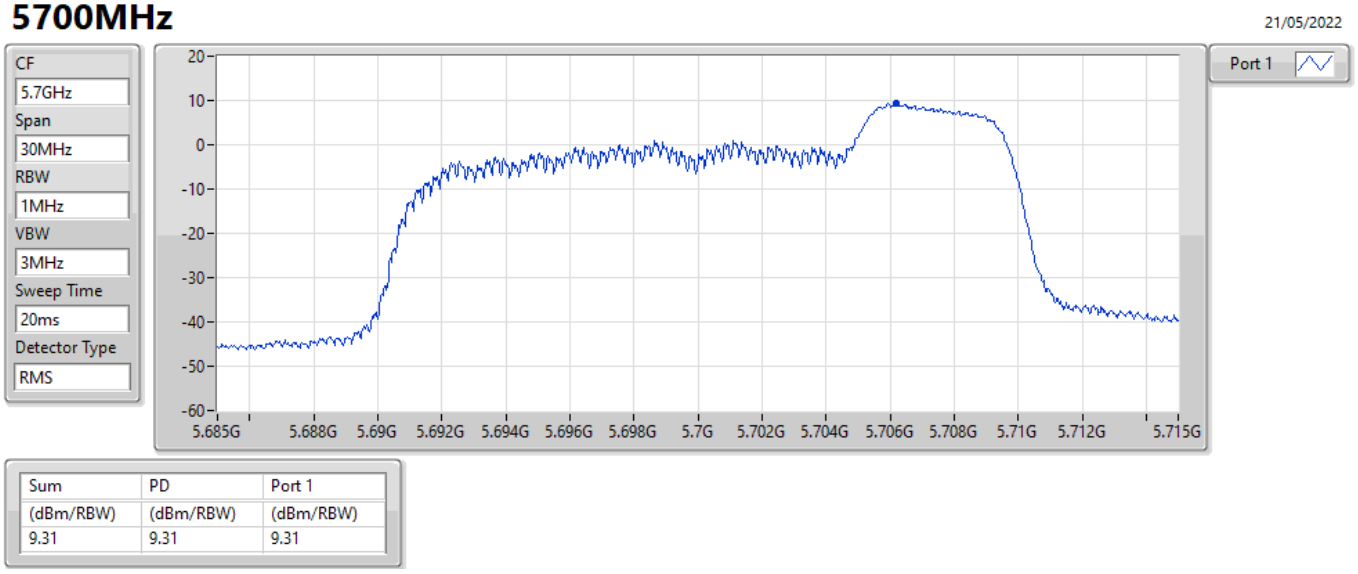

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.31	9.31	9.31

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.47-5.725GHz

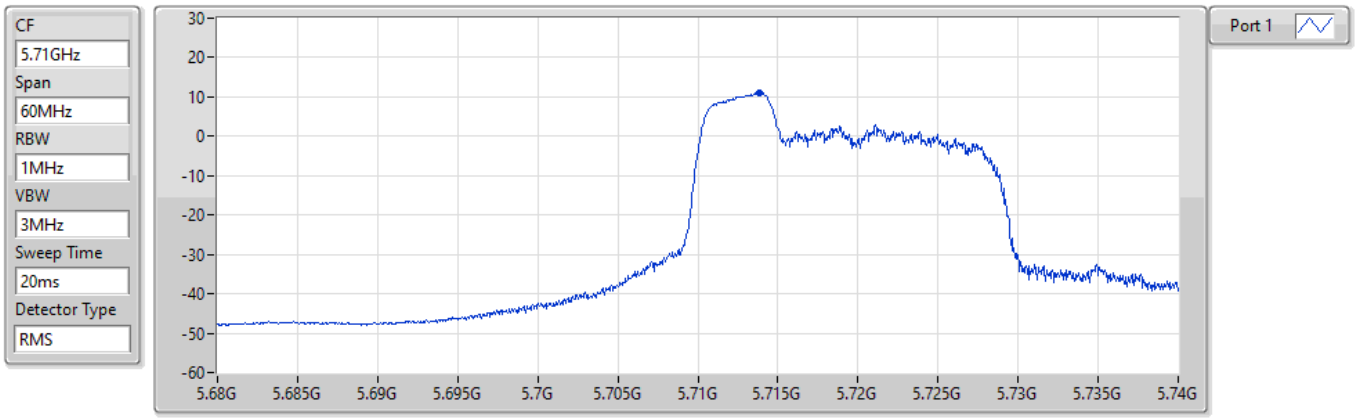

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.98	10.98	10.98

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.725-5.85GHz

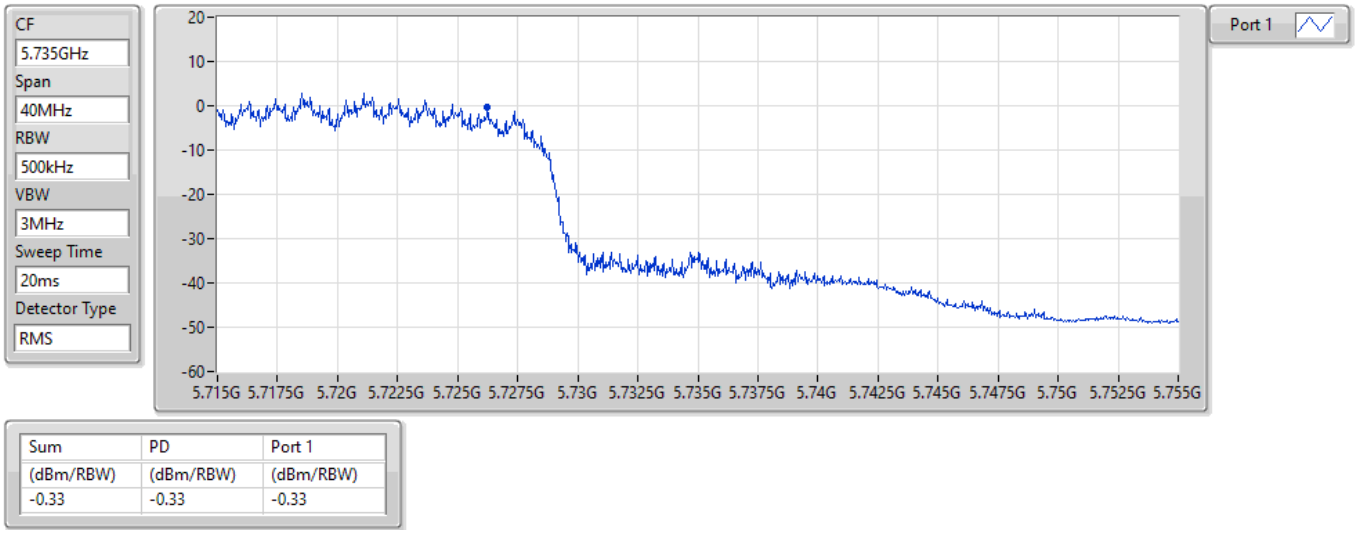

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.33	-0.33	-0.33

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5745MHz

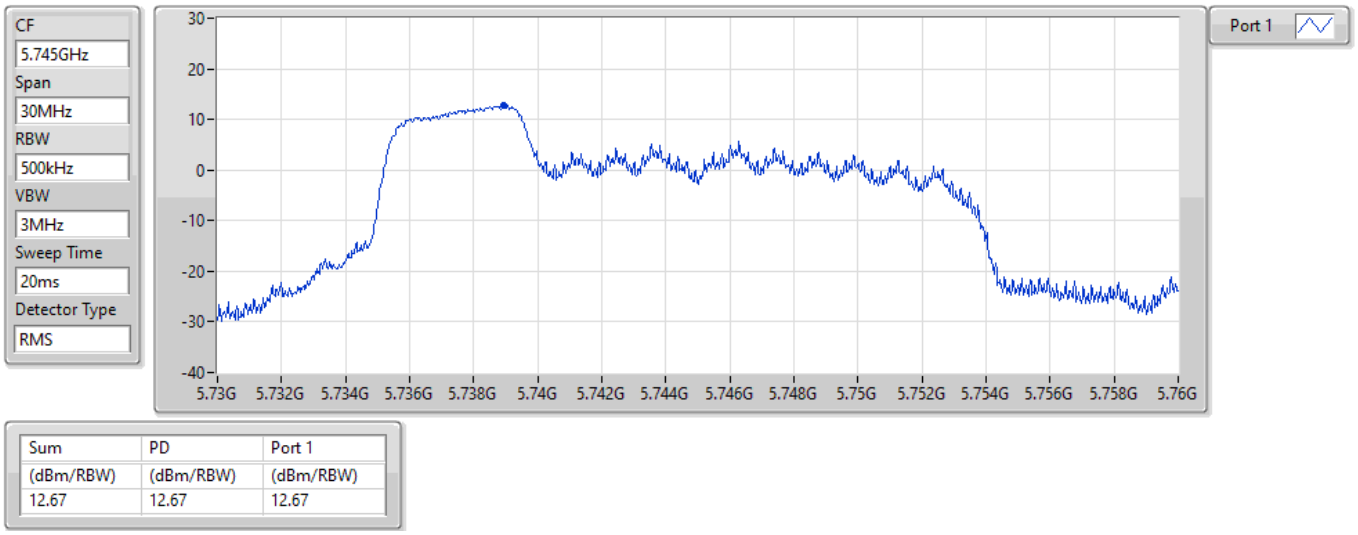

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.67	12.67	12.67

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5785MHz

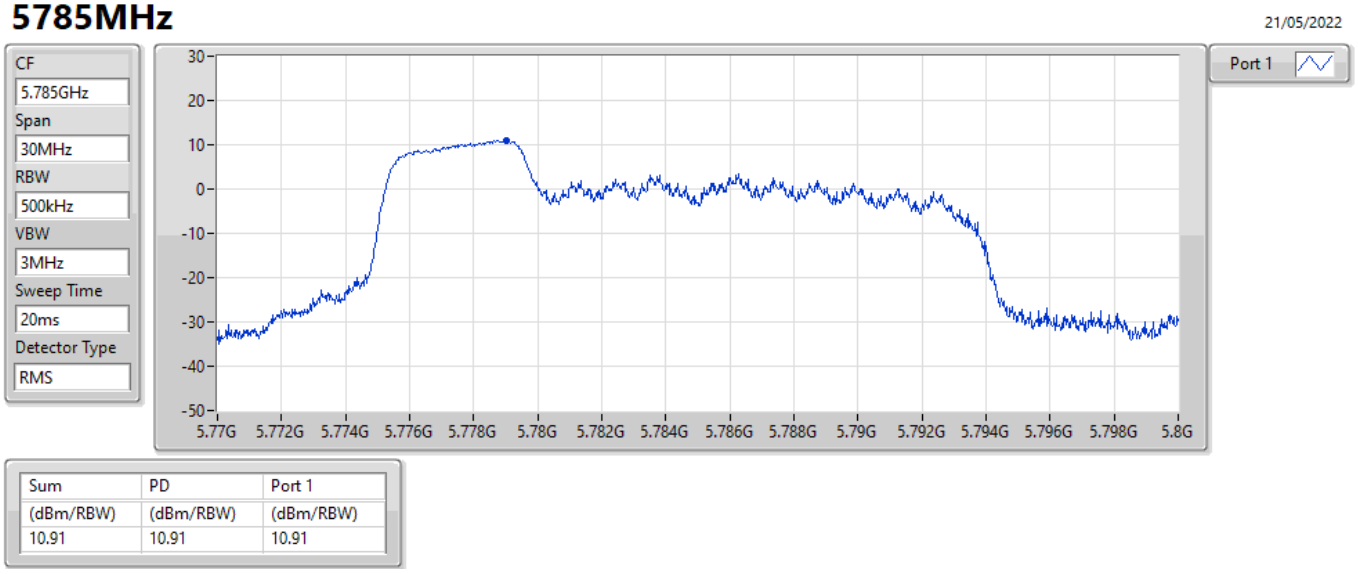

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.91	10.91	10.91

802.11ax HEW20_Nss1,(MCS0)_1TX PSD

5825MHz

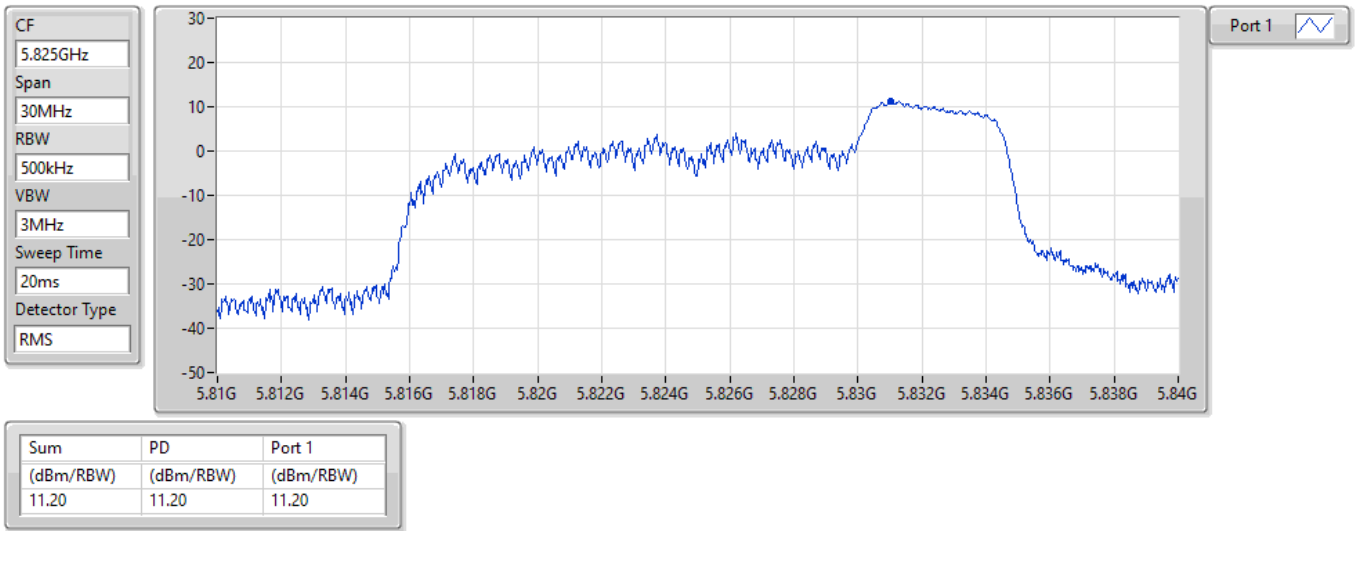

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.20	11.20	11.20

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.81
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.97
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	10.89
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_1TX	12.94

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_1TX	-	-	-	-	-
5180MHz	Pass	5.00	10.80	10.80	11.00
5200MHz	Pass	5.00	10.07	10.07	11.00
5240MHz	Pass	5.00	10.81	10.81	11.00
5260MHz	Pass	5.00	10.97	10.97	11.00
5300MHz	Pass	5.00	10.89	10.89	11.00
5320MHz	Pass	5.00	10.96	10.96	11.00
5500MHz	Pass	5.00	10.65	10.65	11.00
5580MHz	Pass	5.00	10.86	10.86	11.00
5700MHz	Pass	5.00	9.54	9.54	11.00
5720MHz Straddle 5.47-5.725GHz	Pass	5.00	10.89	10.89	11.00
5720MHz Straddle 5.725-5.85GHz	Pass	5.00	-0.61	-0.61	30.00
5745MHz	Pass	5.00	12.94	12.94	30.00
5785MHz	Pass	5.00	11.35	11.35	30.00
5825MHz	Pass	5.00	12.83	12.83	30.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5180MHz

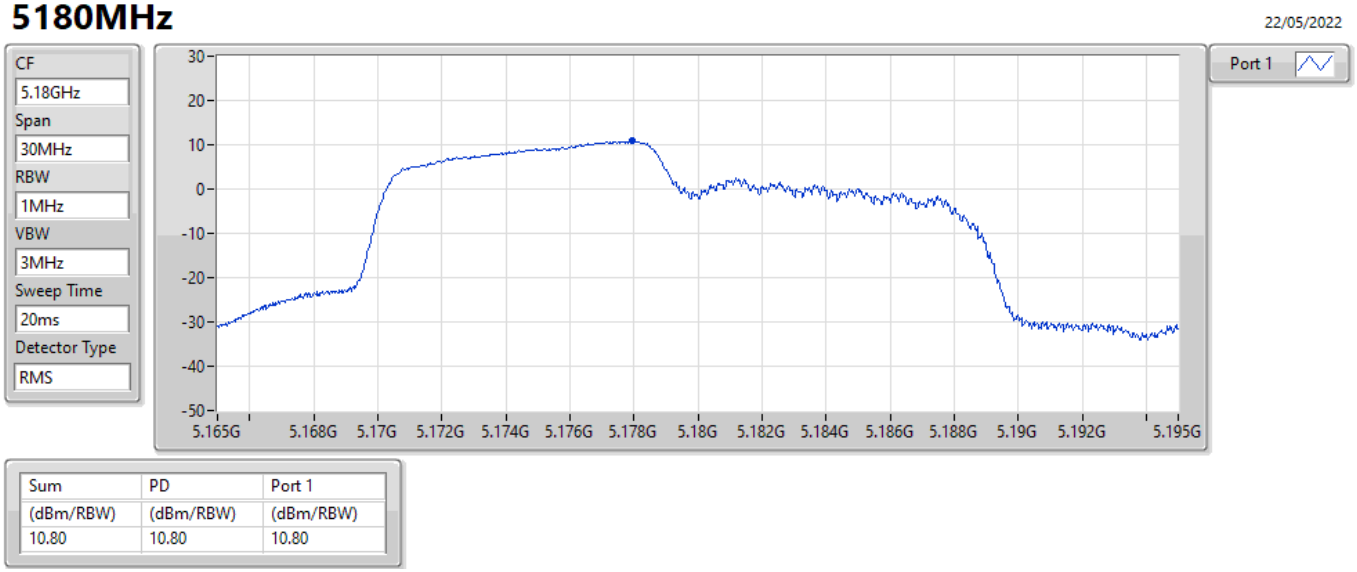

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.80	10.80	10.80

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5200MHz

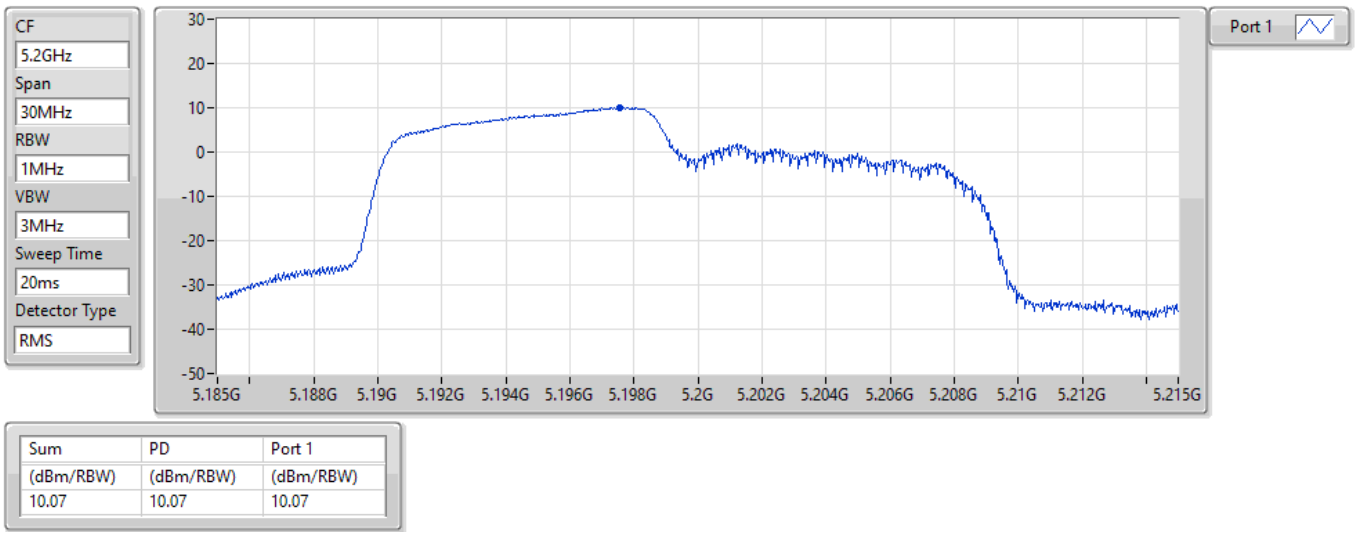

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.07	10.07	10.07

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5240MHz

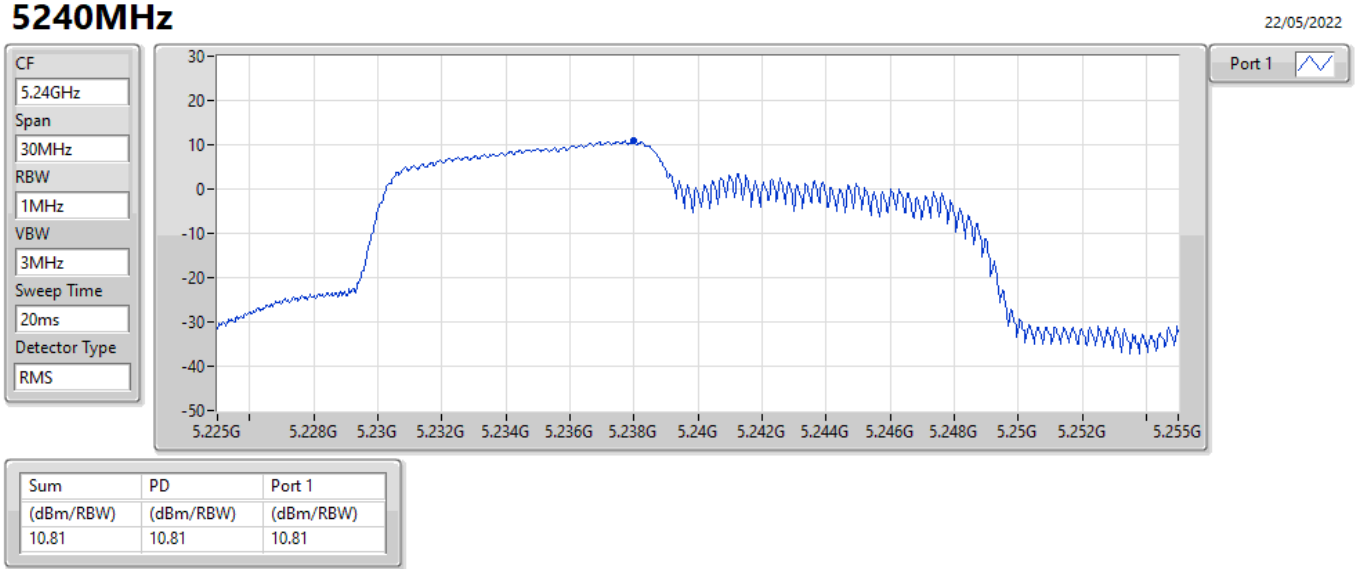

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.81	10.81	10.81

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5260MHz

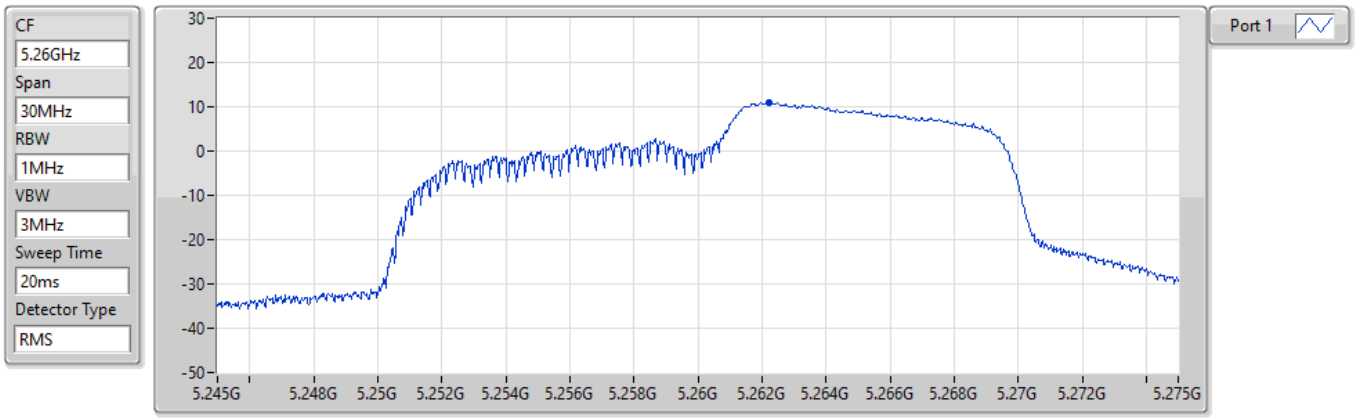

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.97	10.97	10.97

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5300MHz

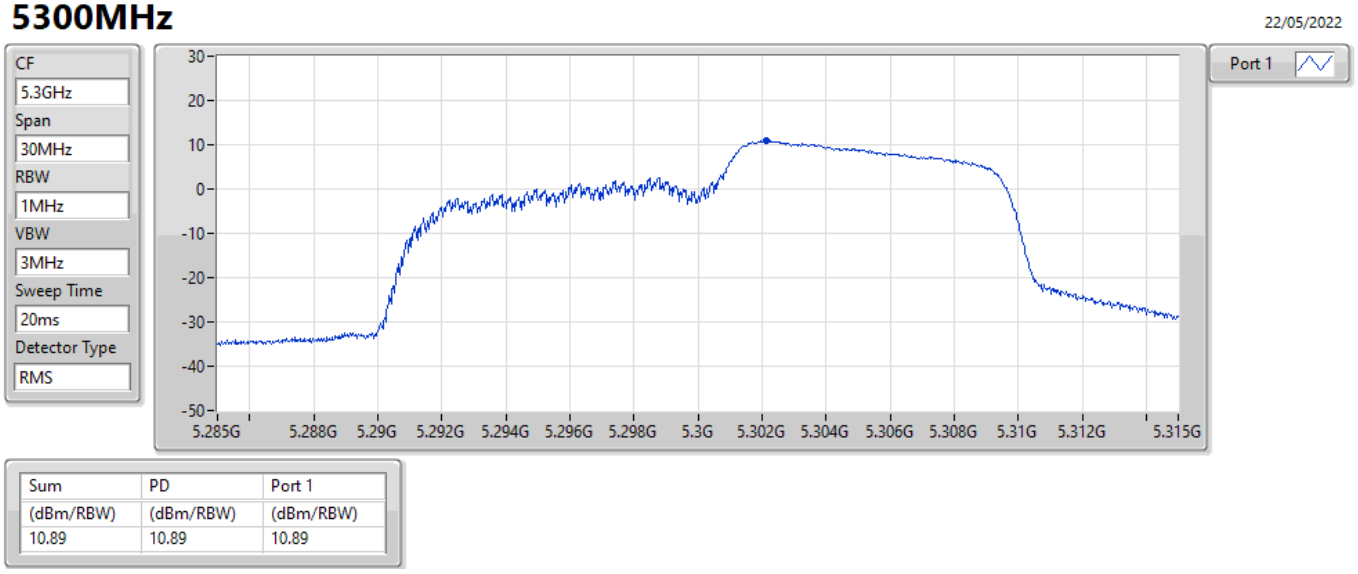

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.89	10.89	10.89

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5320MHz

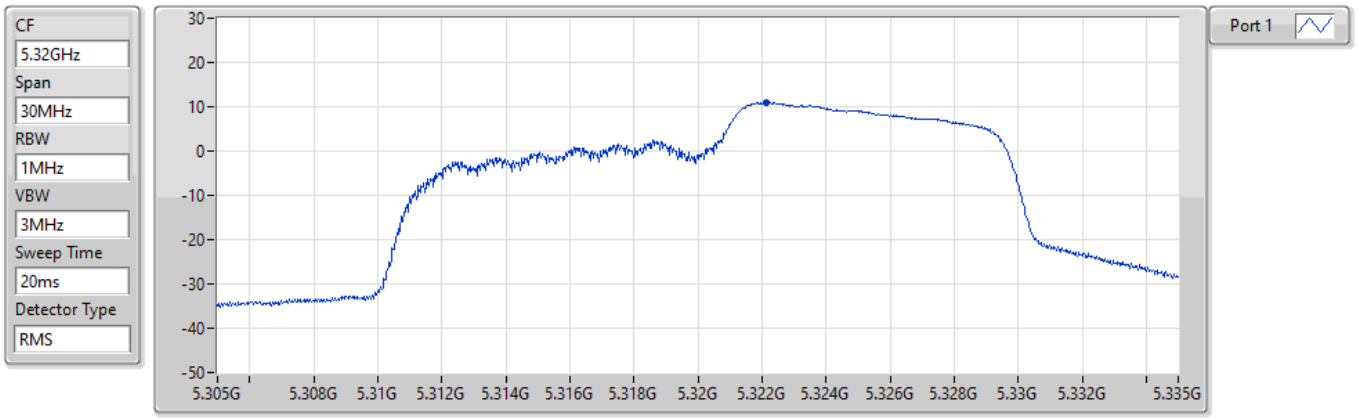

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.96	10.96	10.96

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5500MHz

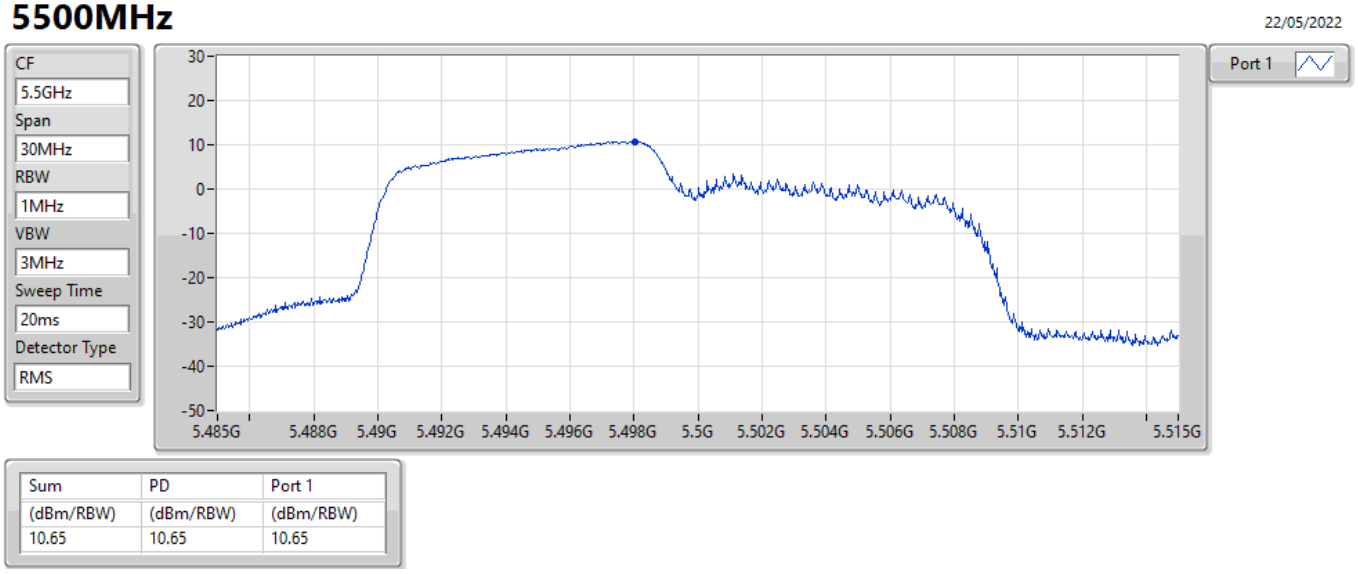

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.65	10.65	10.65

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5580MHz

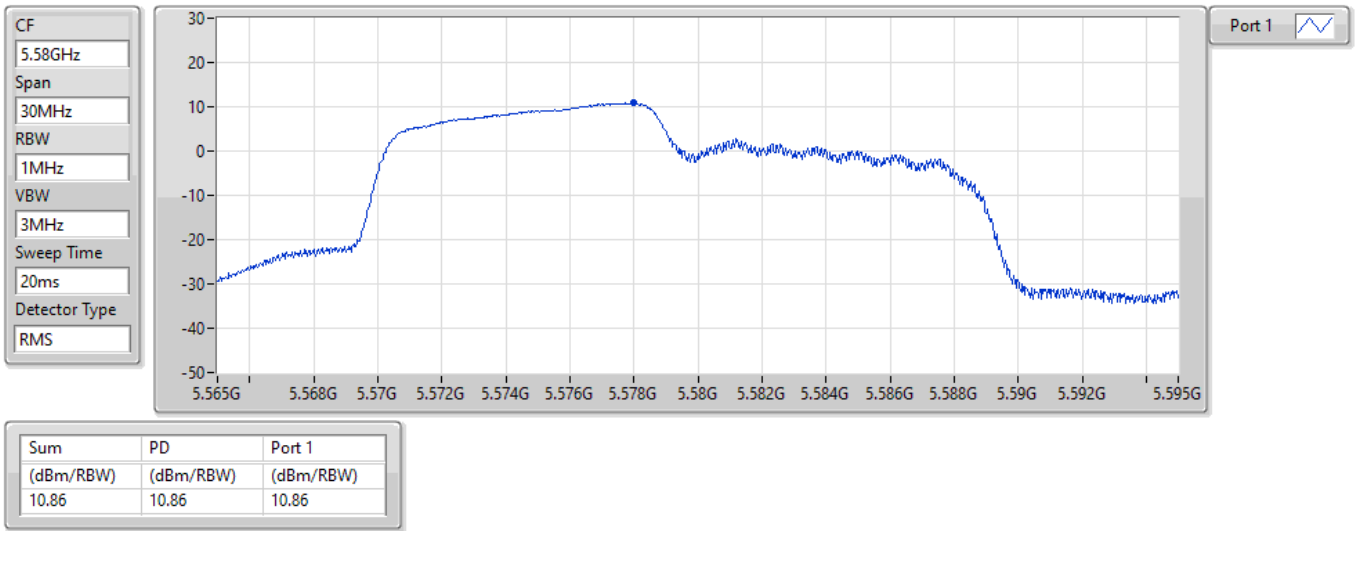

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.86	10.86	10.86

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5700MHz

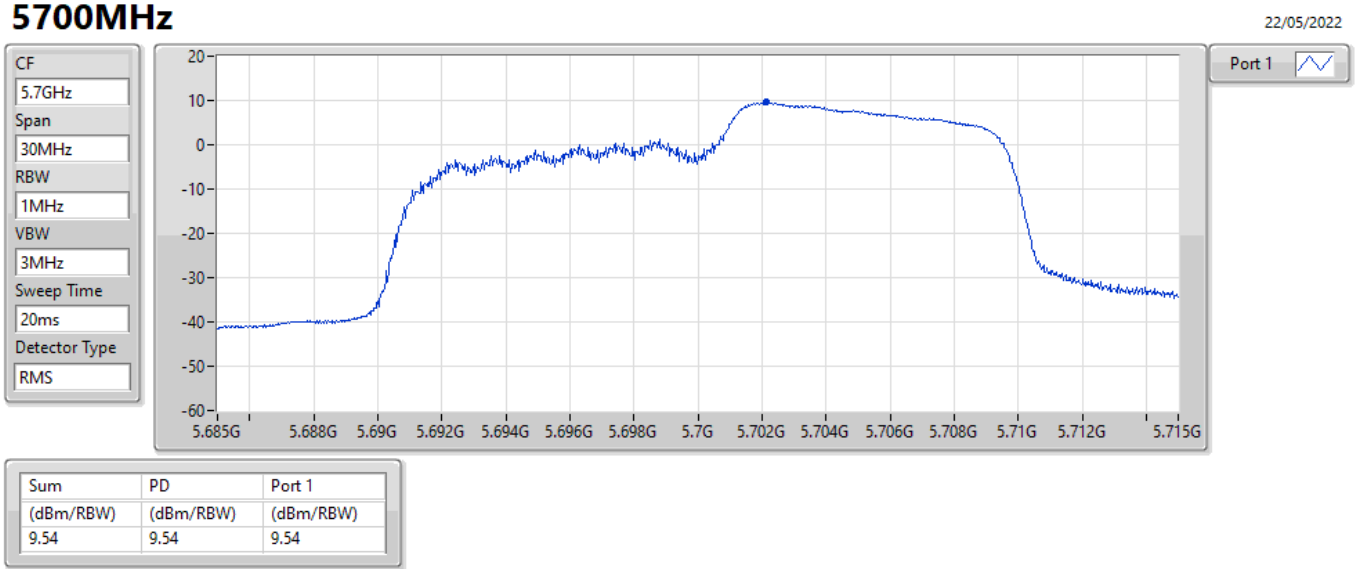

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.54	9.54	9.54

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.47-5.725GHz

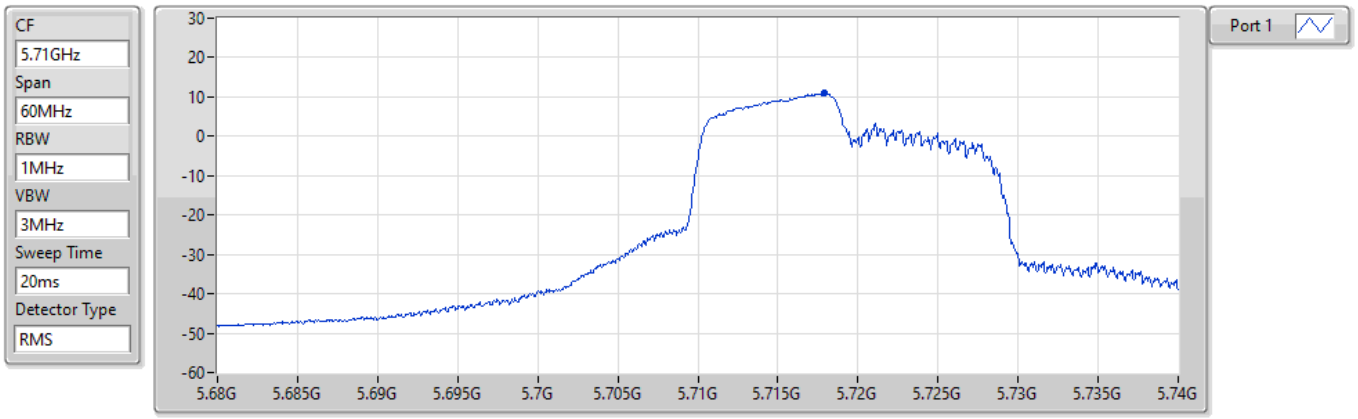

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
10.89	10.89	10.89

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5720MHz Straddle 5.725-5.85GHz

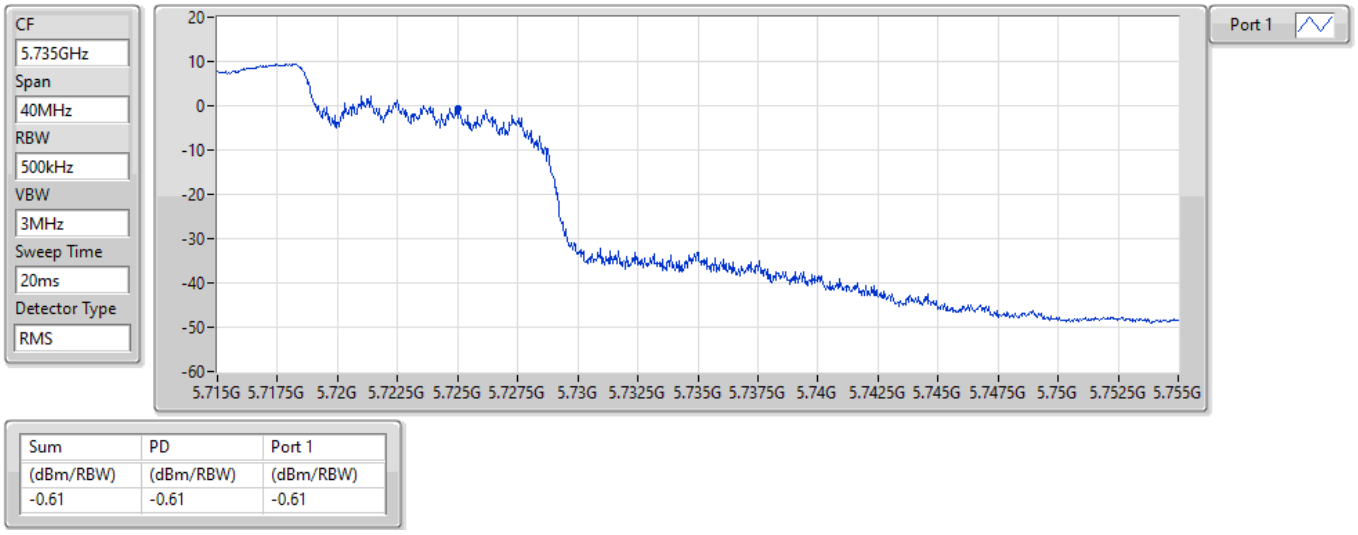

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.61	-0.61	-0.61

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5745MHz

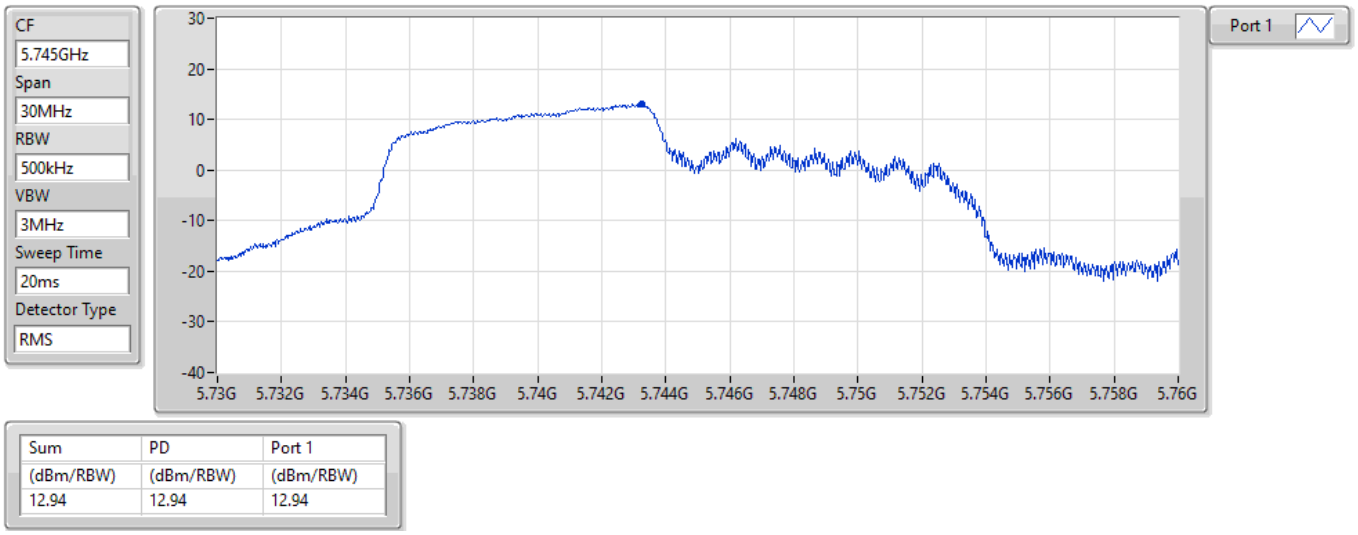

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.94	12.94	12.94

802.11ax HEW20_Nss1,(MCS0)_1TX PSD


5785MHz

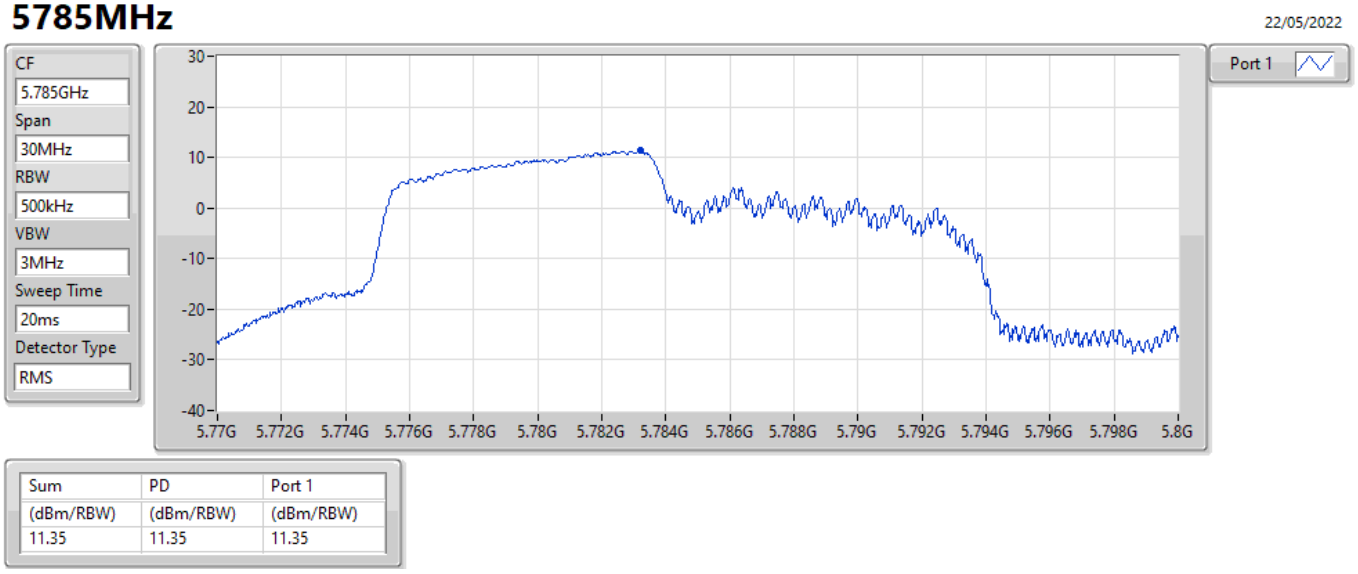

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
11.35	11.35	11.35

802.11ax HEW20_Nss1,(MCS0)_1TX PSD

5825MHz

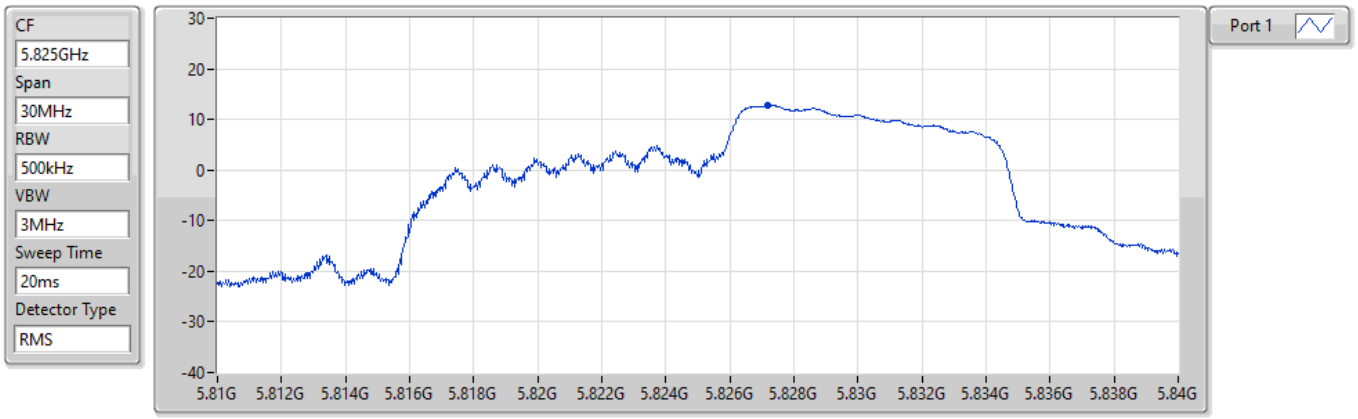

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
12.83	12.83	12.83

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	9.09
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	9.04
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	9.11
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	15.15

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.87	6.01	6.24	9.07	9.13
5200MHz	Pass	7.87	6.01	6.18	9.09	9.13
5240MHz	Pass	7.87	5.90	6.24	9.06	9.13
5260MHz	Pass	7.87	5.92	5.97	8.94	9.13
5300MHz	Pass	7.87	5.89	6.03	8.95	9.13
5320MHz	Pass	7.87	5.86	6.23	9.04	9.13
5500MHz	Pass	7.87	5.92	6.09	9.02	9.13
5580MHz	Pass	7.87	5.81	6.15	8.98	9.13
5700MHz	Pass	7.87	6.02	6.25	9.11	9.13
5720MHz Straddle 5.47-5.725GHz	Pass	7.87	5.96	6.04	9.01	9.13
5720MHz Straddle 5.725-5.85GHz	Pass	7.87	-16.57	-17.82	-15.49	28.13
5745MHz	Pass	7.87	11.55	11.98	14.78	28.13
5785MHz	Pass	7.87	11.97	12.30	15.15	28.13
5825MHz	Pass	7.87	10.66	11.05	13.83	28.13

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5180MHz

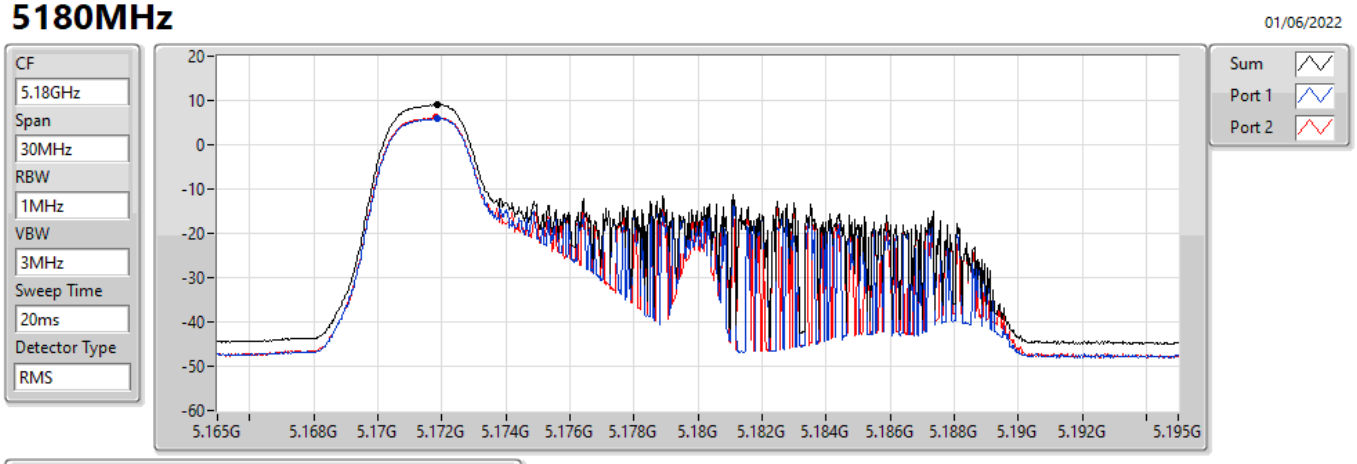

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.07	9.07	6.01	6.24

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5200MHz

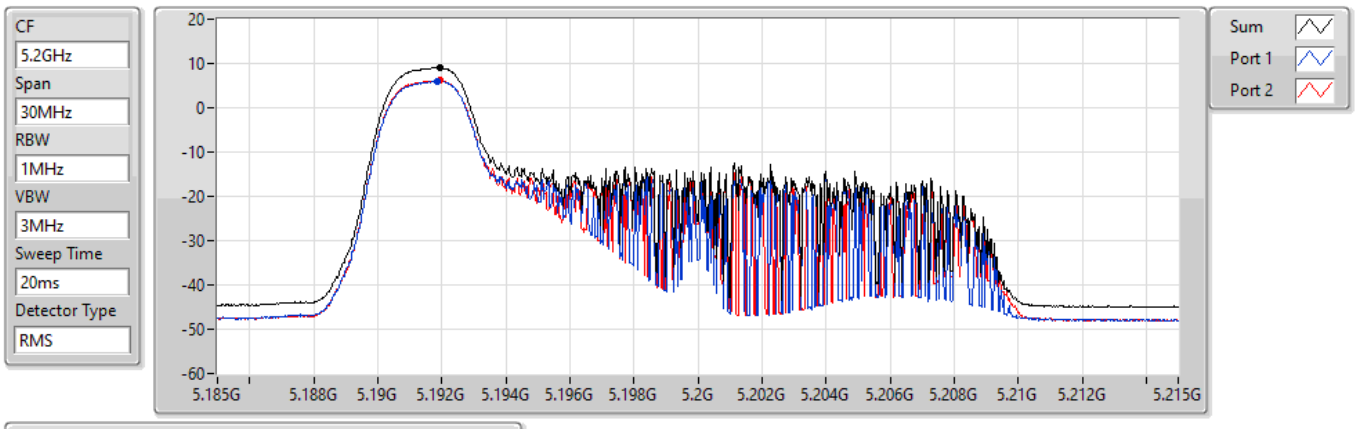

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.09	9.09	6.01	6.18

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5240MHz

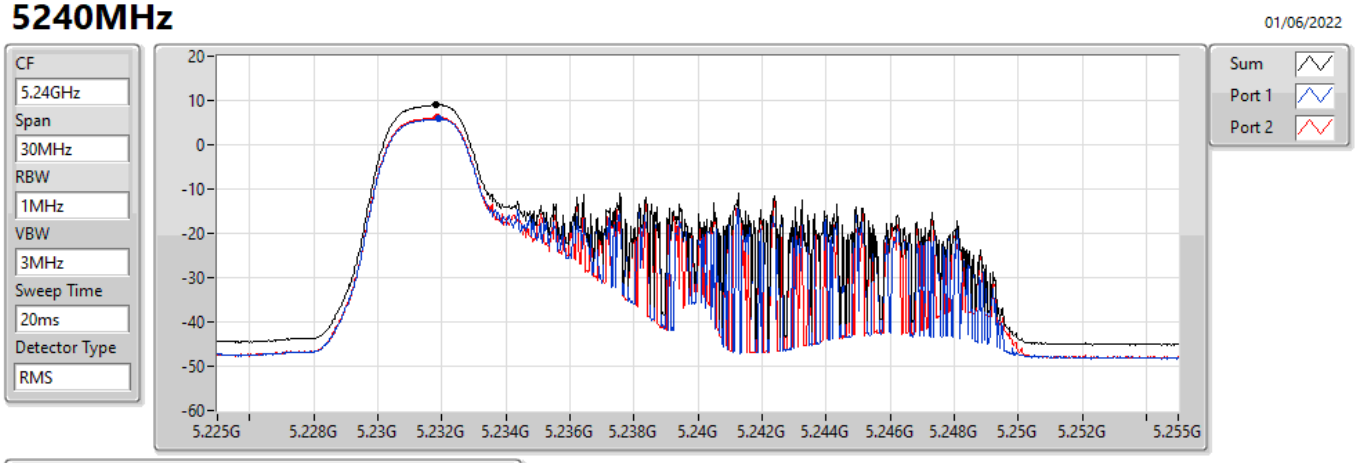

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.06	9.06	5.90	6.24

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5260MHz

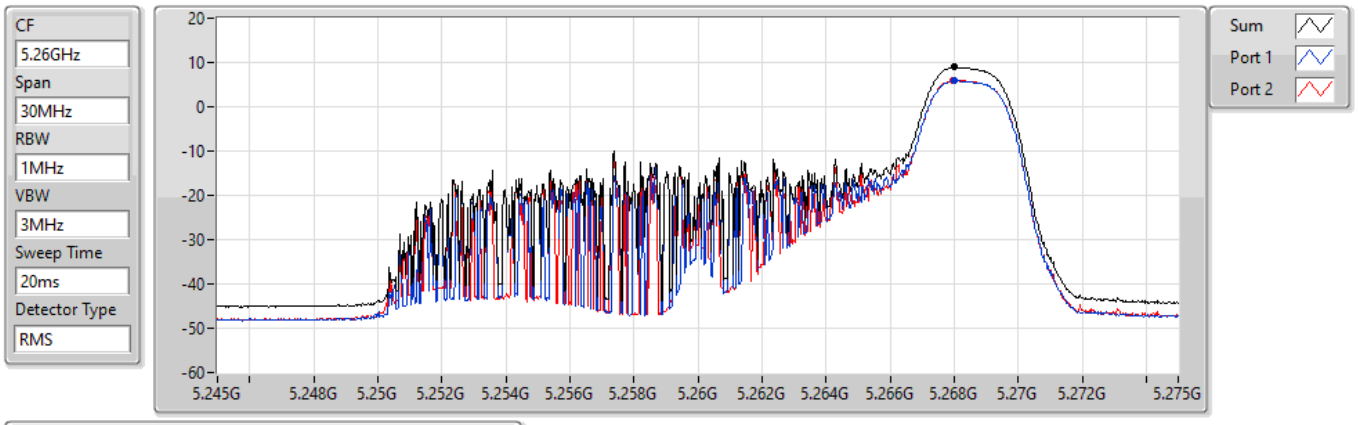

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.94	8.94	5.92	5.97

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5300MHz

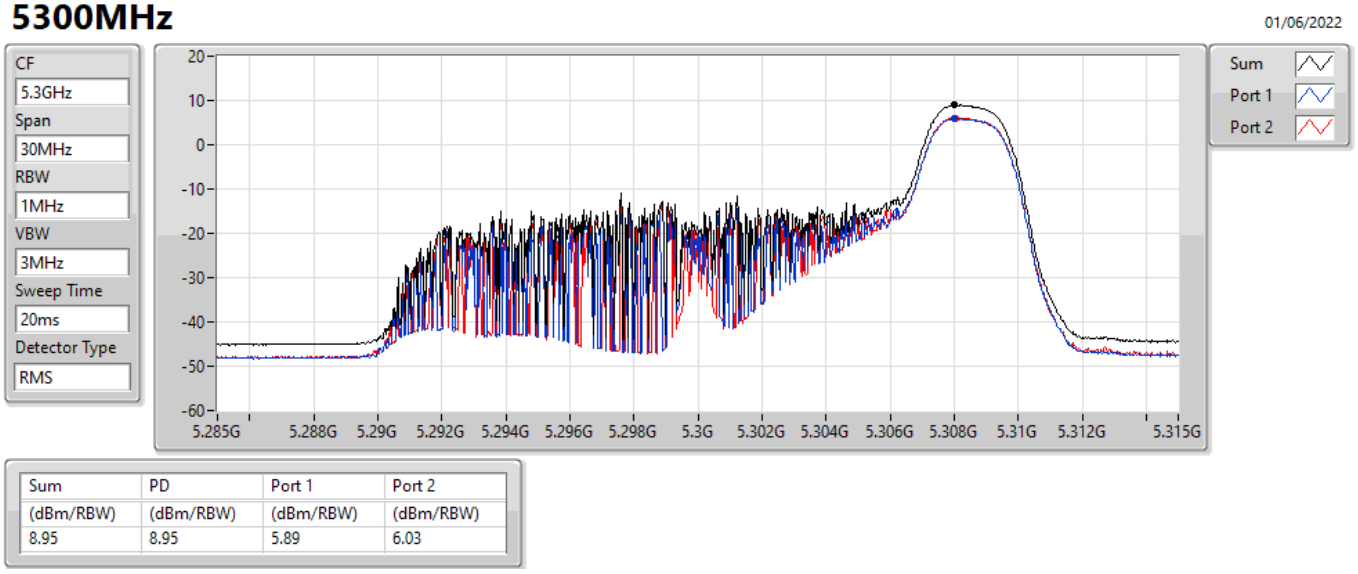

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.95	8.95	5.89	6.03

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5320MHz

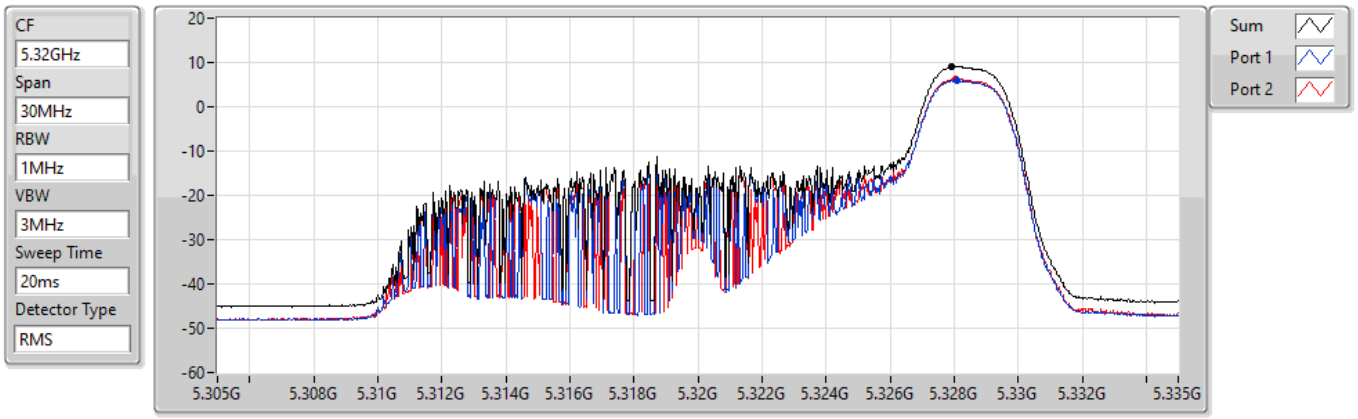

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.04	9.04	5.86	6.23

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5500MHz

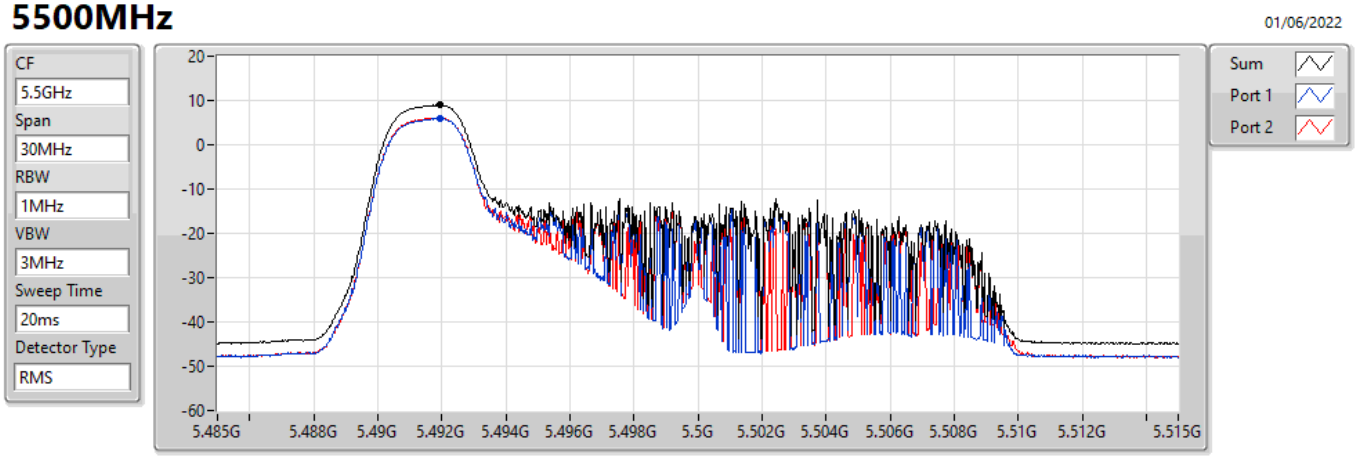

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.02	9.02	5.92	6.09

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5580MHz

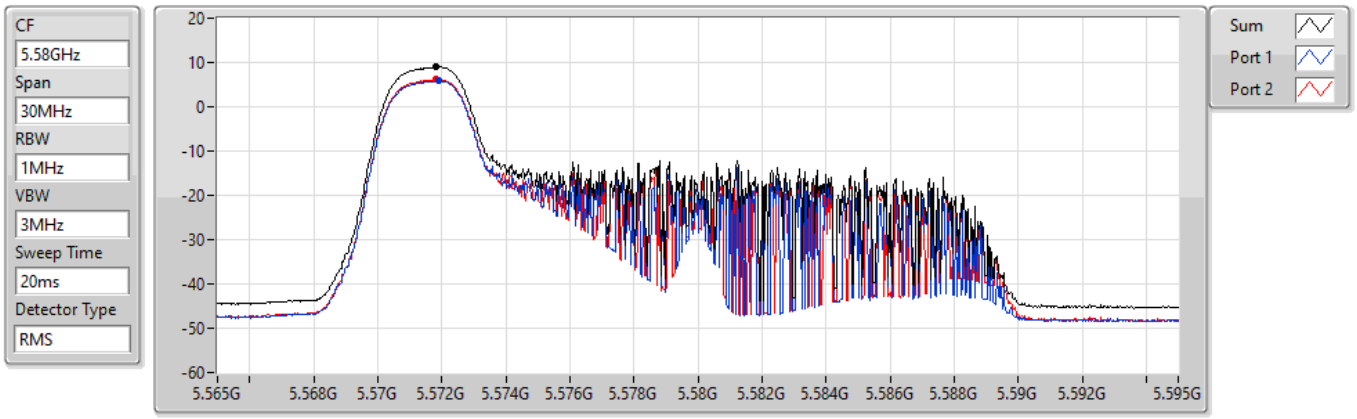

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.98	8.98	5.81	6.15

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5700MHz

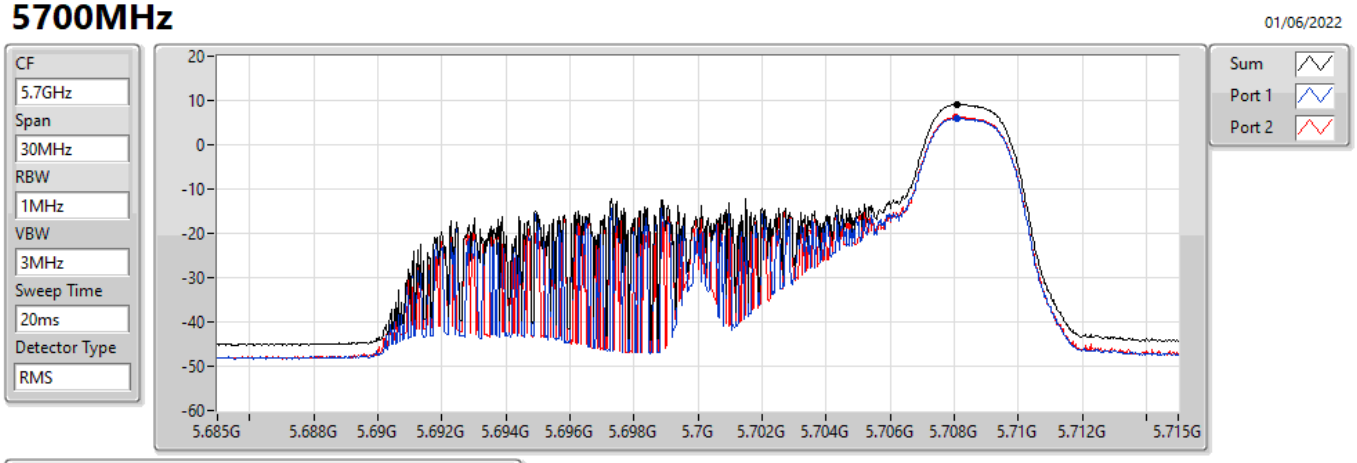

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.11	9.11	6.02	6.25

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.47-5.725GHz

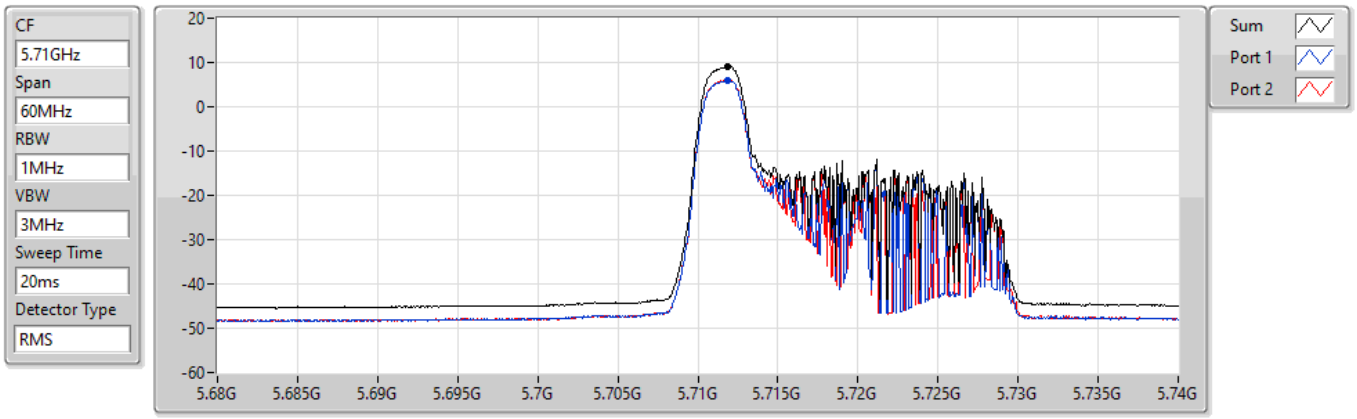

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.01	9.01	5.96	6.04

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.725-5.85GHz

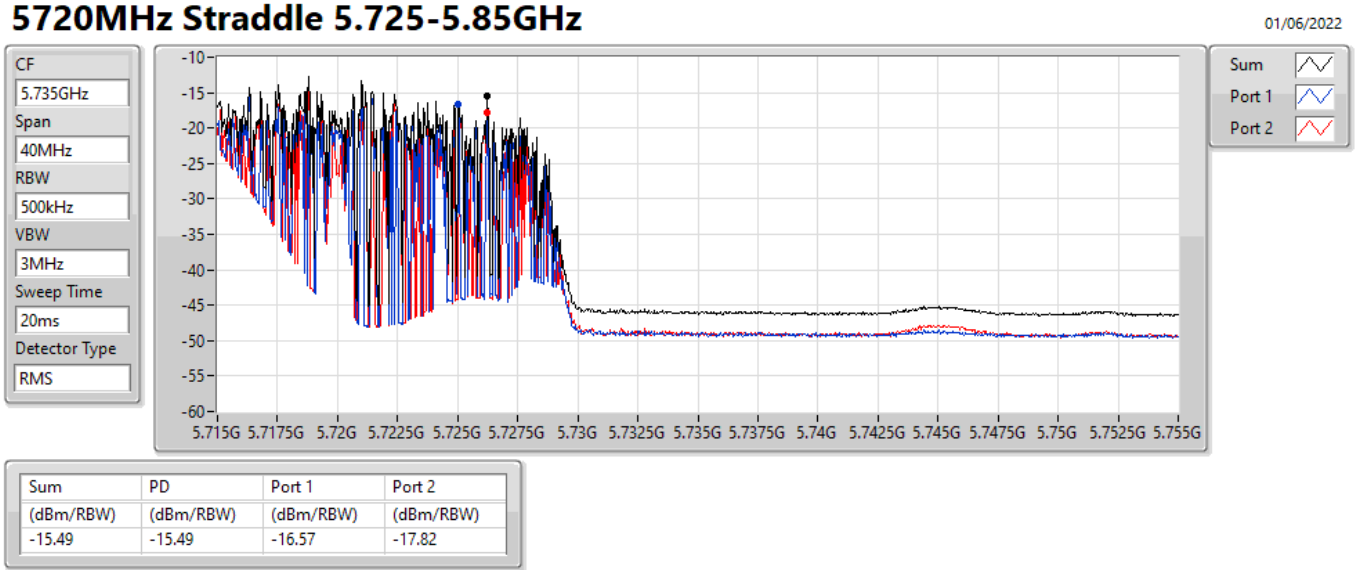

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-15.49	-15.49	-16.57	-17.82

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5745MHz

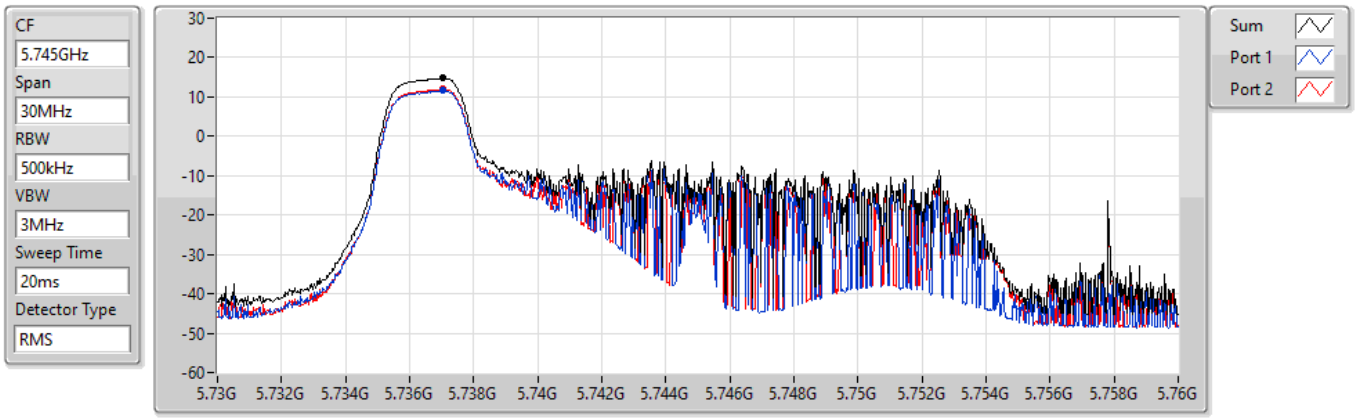

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.78	14.78	11.55	11.98

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5785MHz

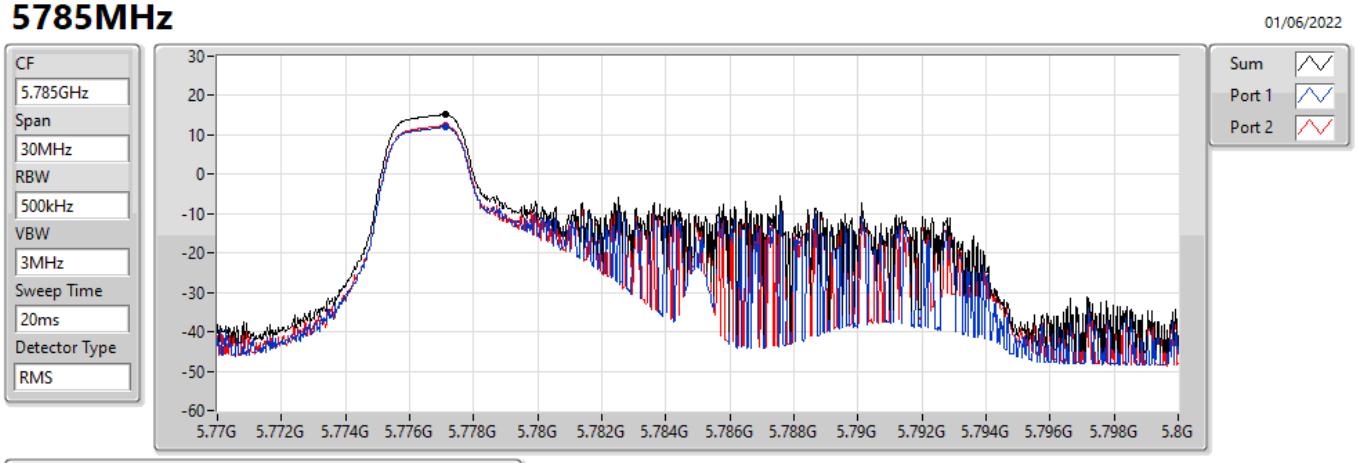

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.15	15.15	11.97	12.30

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5825MHz

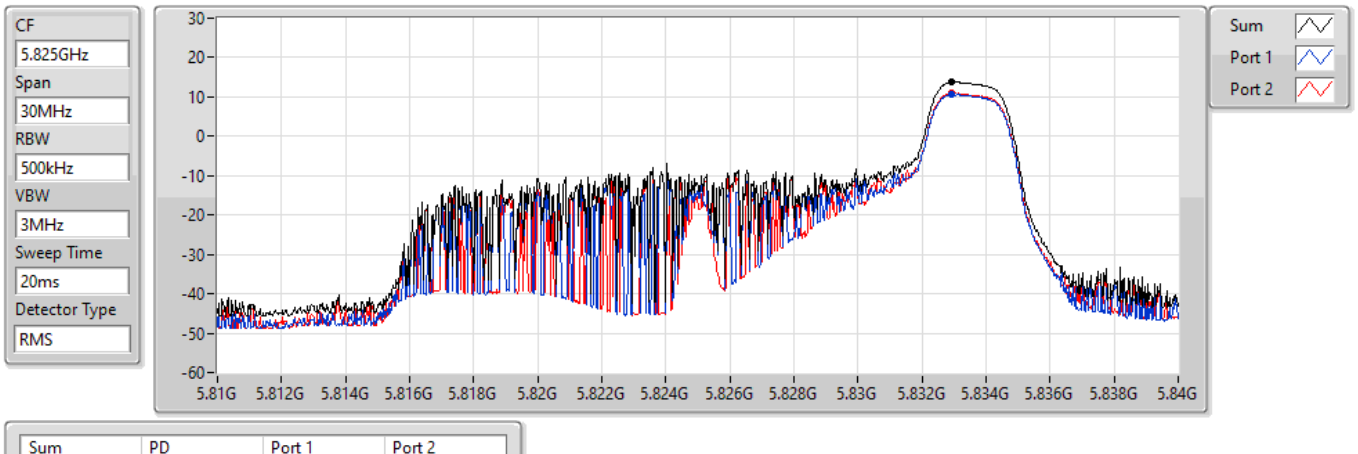

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.83	13.83	10.66	11.05

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	9.07
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	9.06
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	9.11
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	14.54

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.87	5.84	6.43	9.07	9.13
5200MHz	Pass	7.87	5.93	6.16	8.93	9.13
5240MHz	Pass	7.87	5.57	6.24	8.87	9.13
5260MHz	Pass	7.87	6.00	6.22	9.06	9.13
5300MHz	Pass	7.87	6.42	6.01	9.04	9.13
5320MHz	Pass	7.87	5.93	6.20	8.97	9.13
5500MHz	Pass	7.87	5.93	5.93	8.93	9.13
5580MHz	Pass	7.87	5.87	6.27	9.00	9.13
5700MHz	Pass	7.87	5.80	6.11	8.92	9.13
5720MHz Straddle 5.47-5.725GHz	Pass	7.87	6.02	6.22	9.11	9.13
5720MHz Straddle 5.725-5.85GHz	Pass	7.87	-5.96	-5.33	-3.07	28.13
5745MHz	Pass	7.87	11.15	11.65	14.29	28.13
5785MHz	Pass	7.87	11.39	11.73	14.54	28.13
5825MHz	Pass	7.87	11.54	10.90	14.20	28.13

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5180MHz

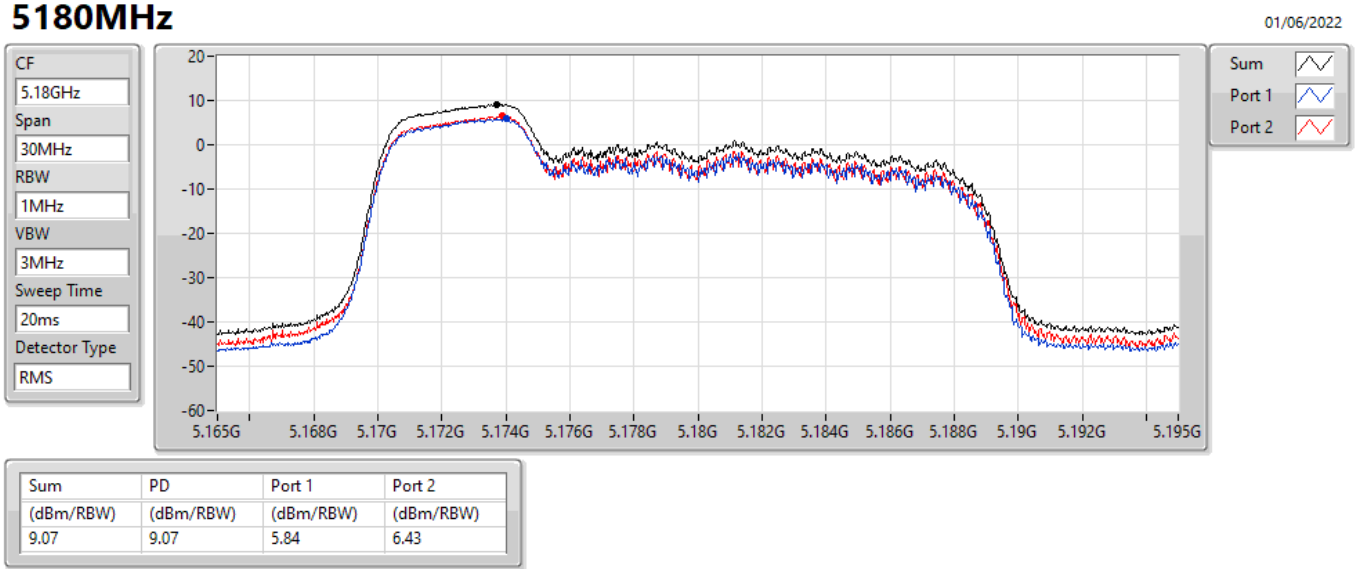

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.07	9.07	5.84	6.43

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5200MHz

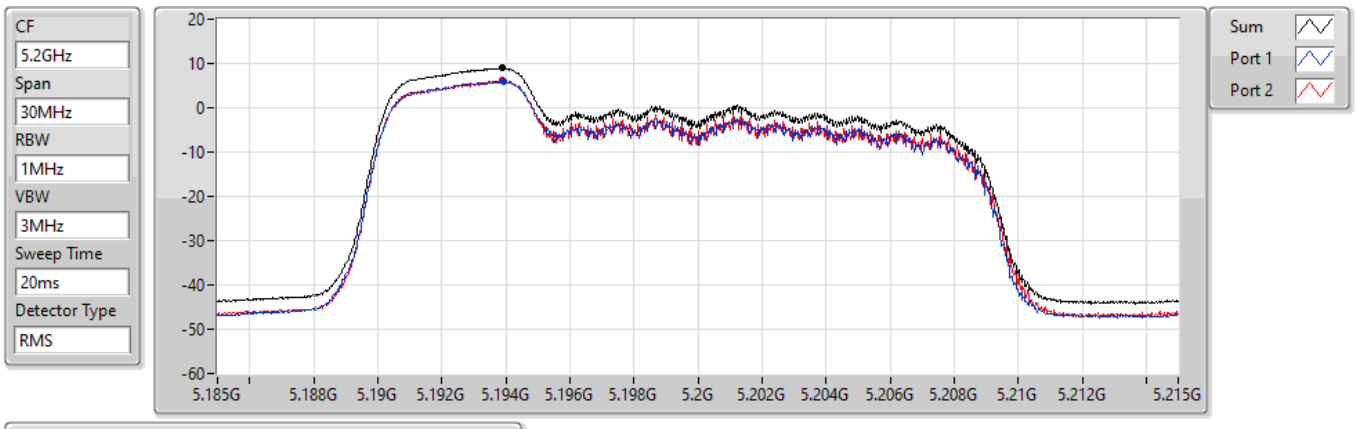

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.93	8.93	5.93	6.16

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5240MHz

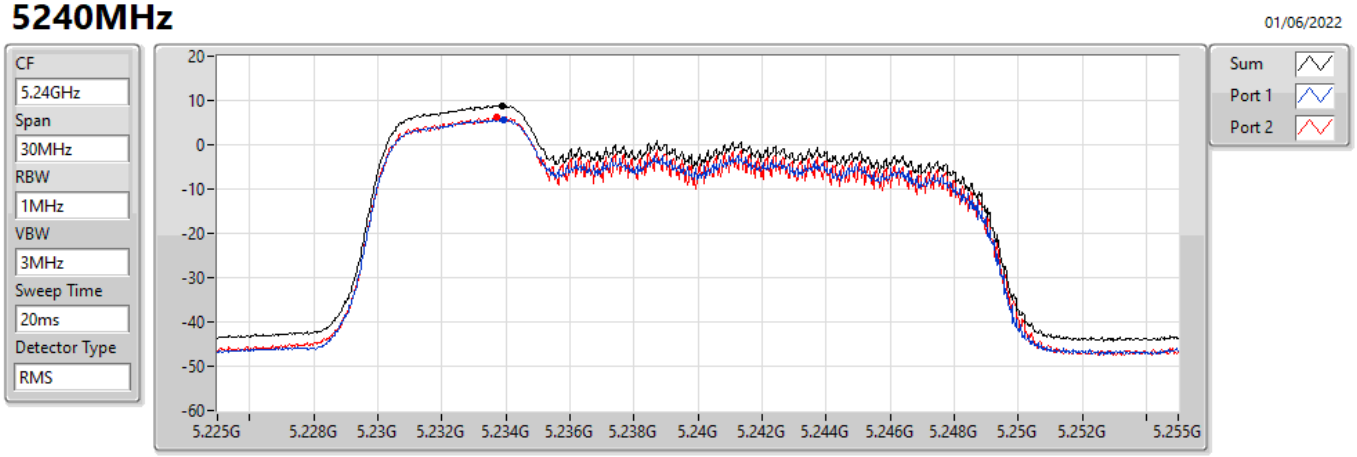

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.87	8.87	5.57	6.24

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5260MHz

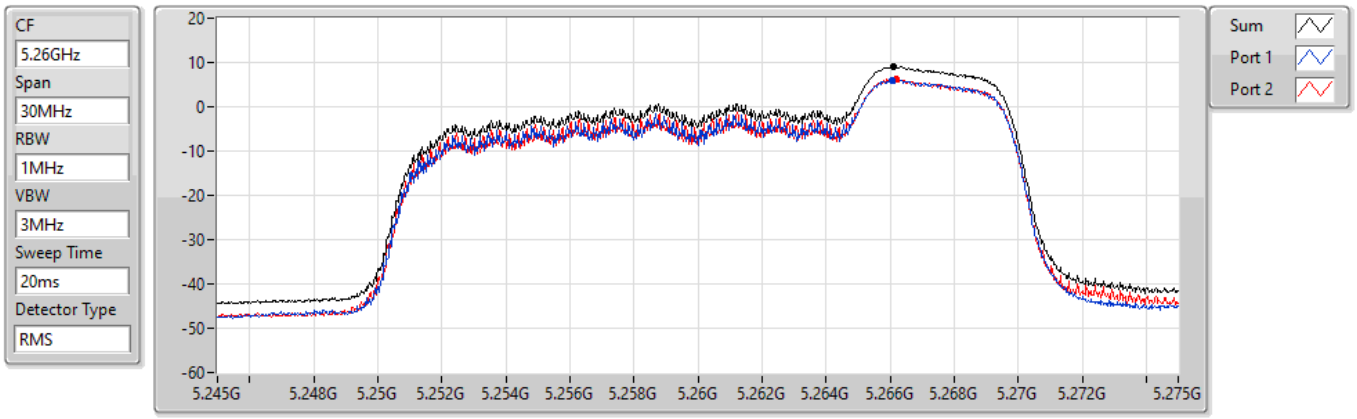

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.06	9.06	6.00	6.22

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5300MHz

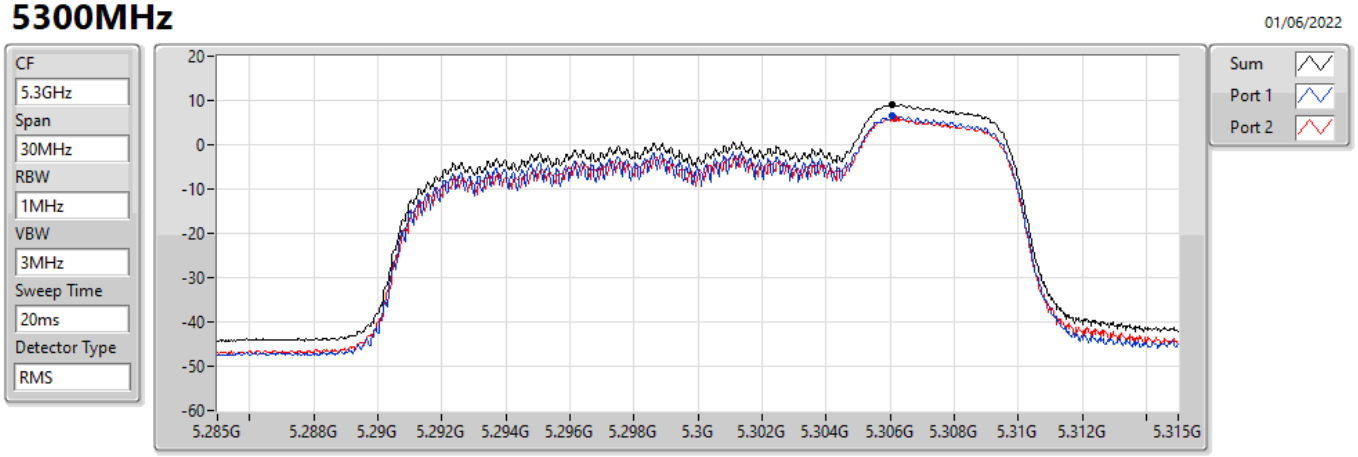

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.04	9.04	6.42	6.01

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5320MHz

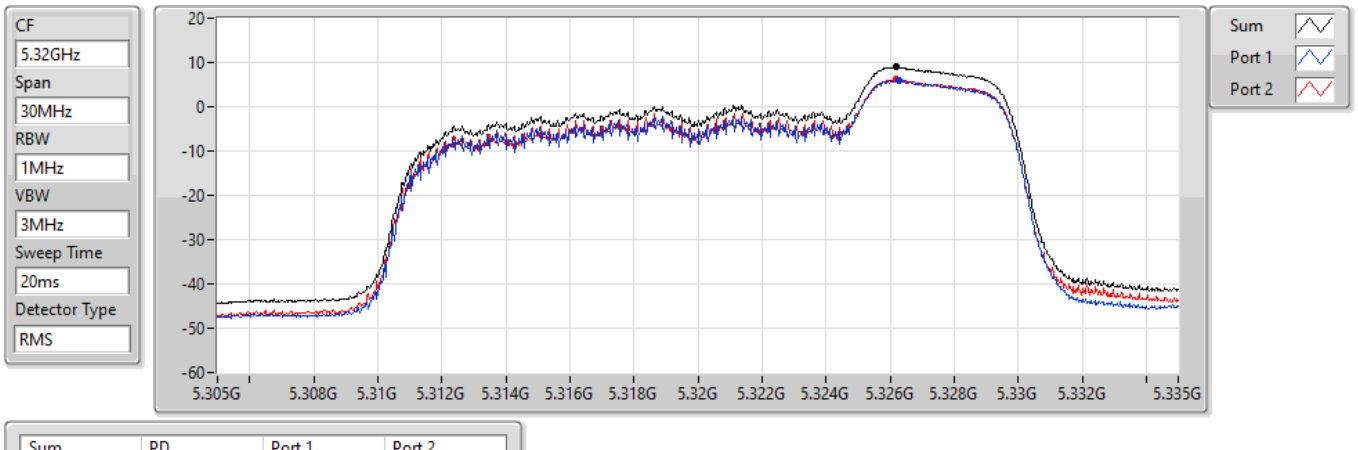

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.97	8.97	5.93	6.20

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5500MHz

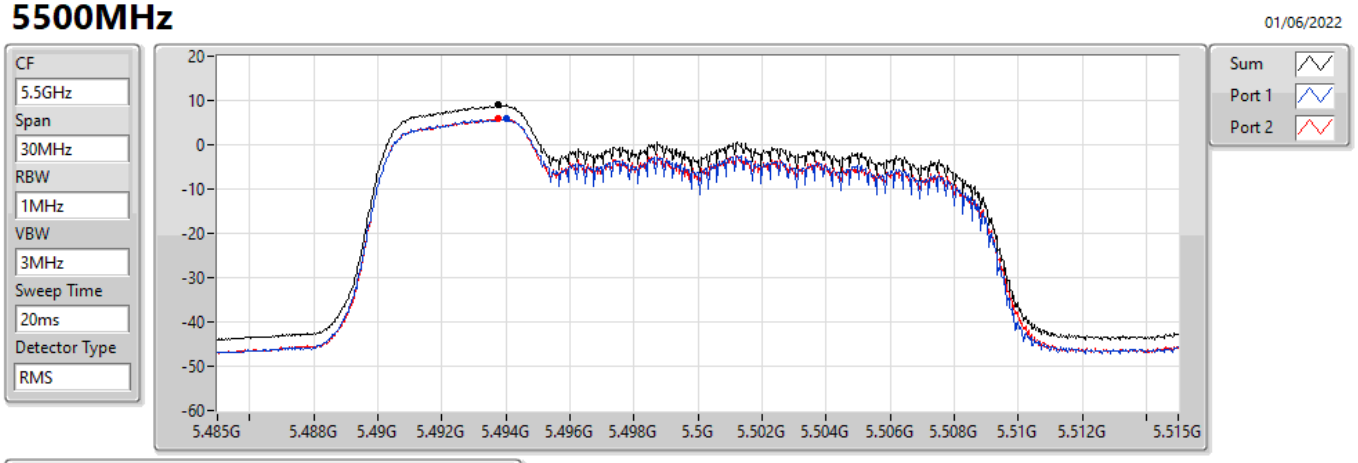

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.93	8.93	5.93	5.93

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5580MHz

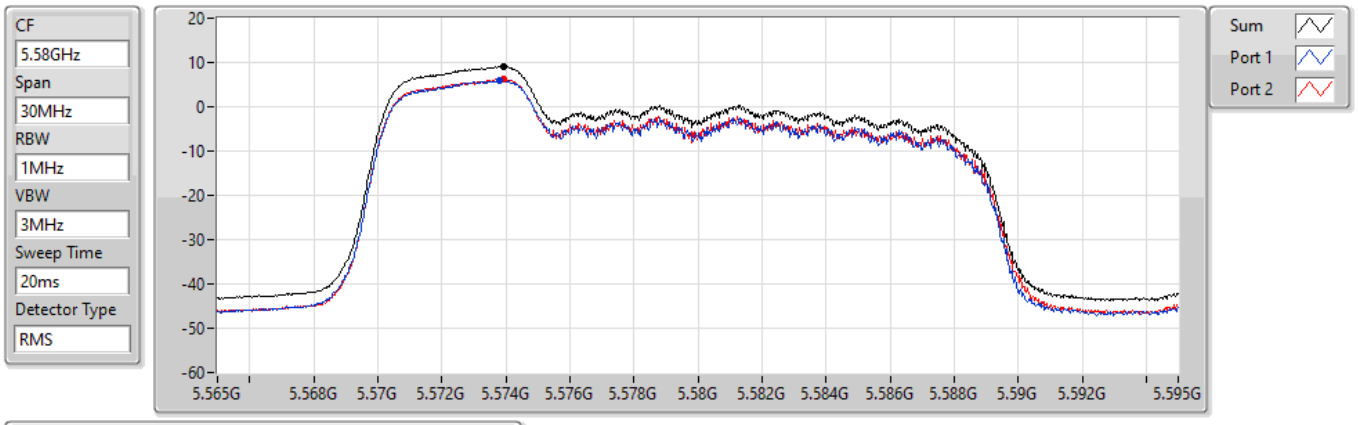

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.00	9.00	5.87	6.27

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5700MHz

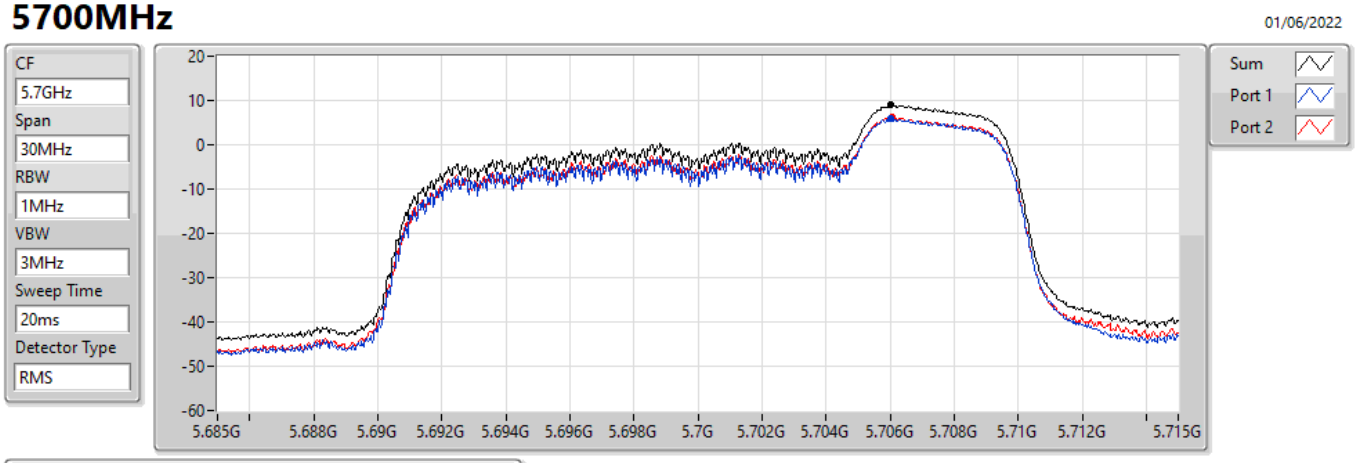

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.92	8.92	5.80	6.11

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.47-5.725GHz

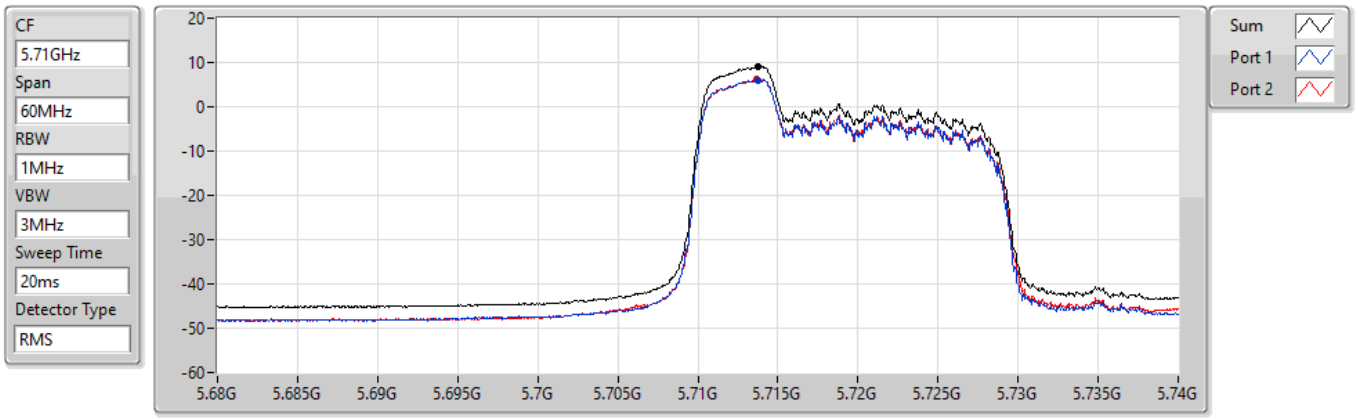

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.11	9.11	6.02	6.22

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.725-5.85GHz

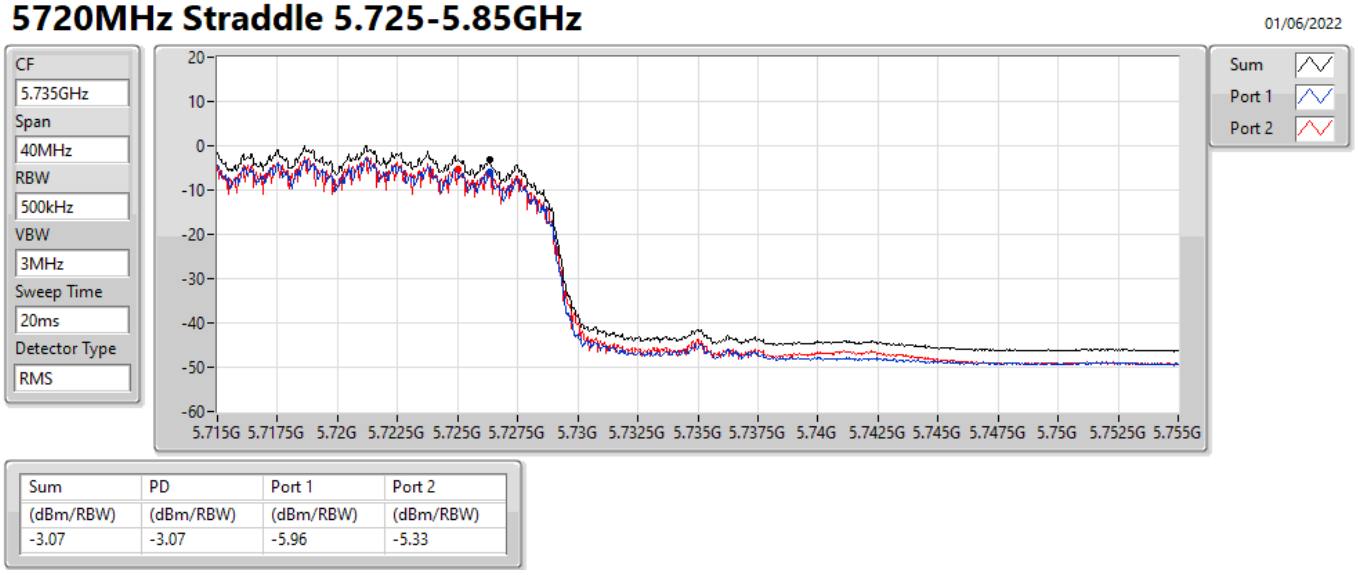

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.07	-3.07	-5.96	-5.33

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5745MHz

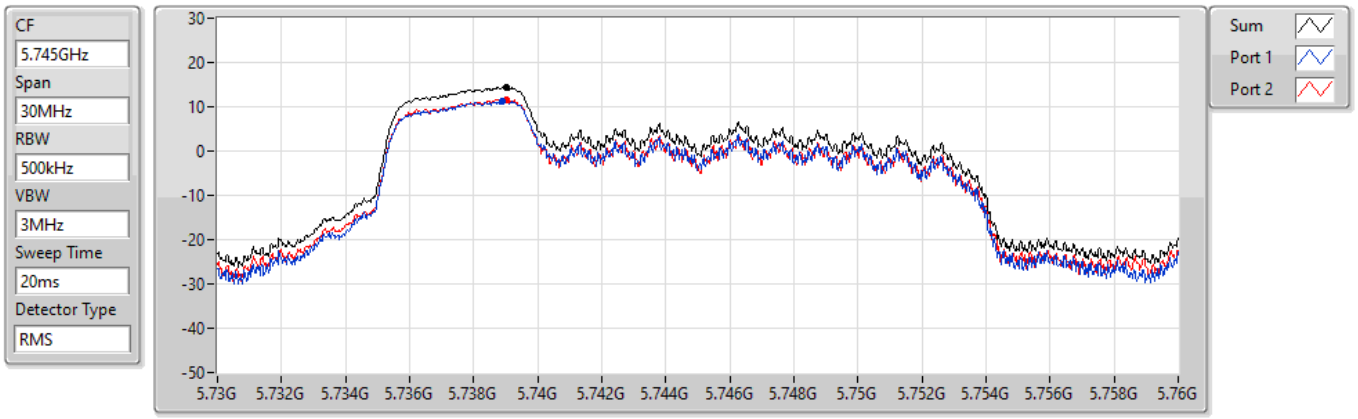

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.29	14.29	11.15	11.65

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5785MHz

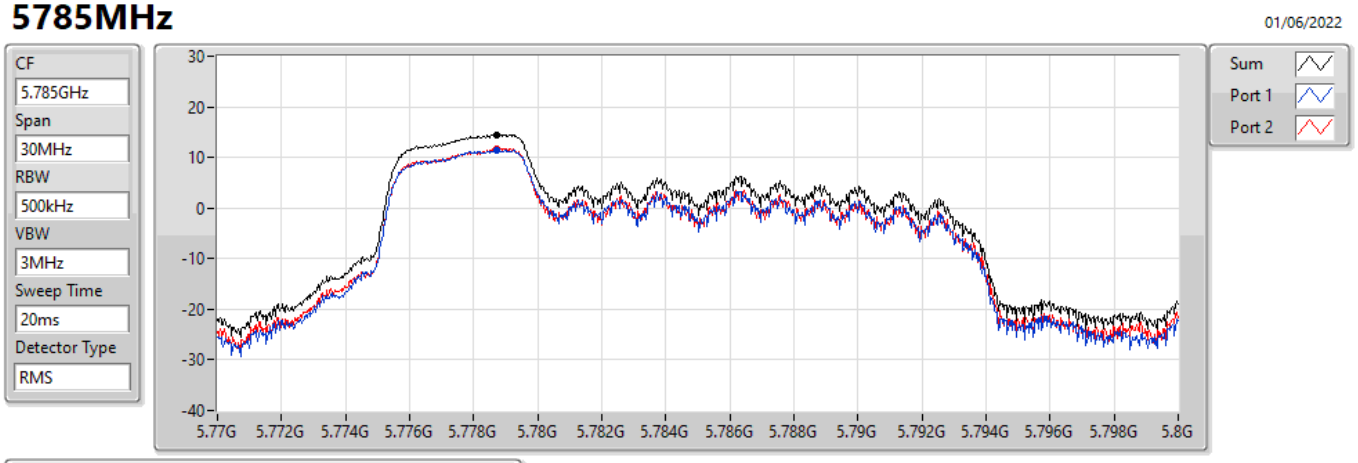

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.54	14.54	11.39	11.73

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5825MHz

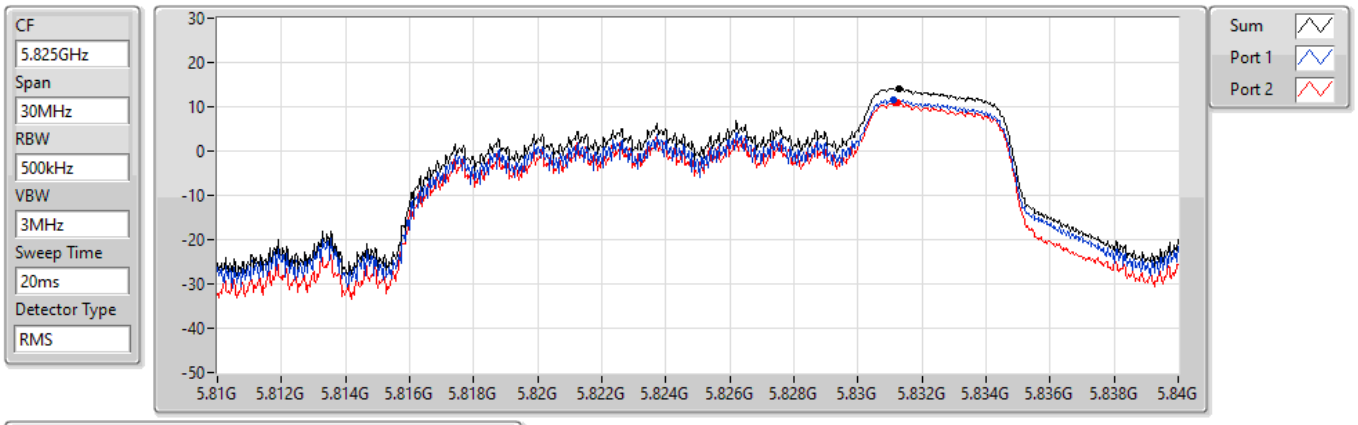

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.20	14.20	11.54	10.90

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.92
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	9.07
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	9.09
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	14.45

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	7.87	5.93	5.89	8.92	9.13
5200MHz	Pass	7.87	5.79	6.03	8.90	9.13
5240MHz	Pass	7.87	5.98	5.88	8.89	9.13
5260MHz	Pass	7.87	5.63	6.16	8.87	9.13
5300MHz	Pass	7.87	6.11	6.07	9.03	9.13
5320MHz	Pass	7.87	6.10	6.18	9.07	9.13
5500MHz	Pass	7.87	5.80	6.21	8.96	9.13
5580MHz	Pass	7.87	5.77	6.27	8.98	9.13
5700MHz	Pass	7.87	6.05	6.19	9.09	9.13
5720MHz Straddle 5.47-5.725GHz	Pass	7.87	6.08	5.98	9.00	9.13
5720MHz Straddle 5.725-5.85GHz	Pass	7.87	-4.96	-5.76	-2.33	28.13
5745MHz	Pass	7.87	11.66	11.48	14.45	28.13
5785MHz	Pass	7.87	11.70	11.16	14.35	28.13
5825MHz	Pass	7.87	10.78	10.37	13.51	28.13

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5180MHz

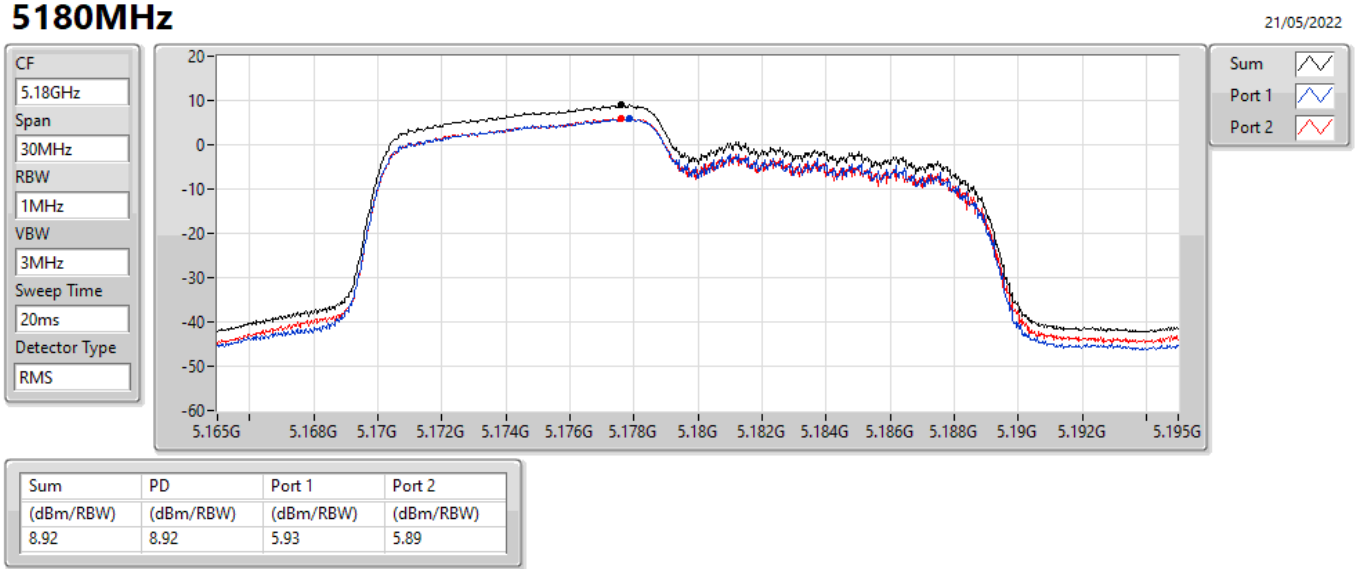

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.92	8.92	5.93	5.89

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5200MHz

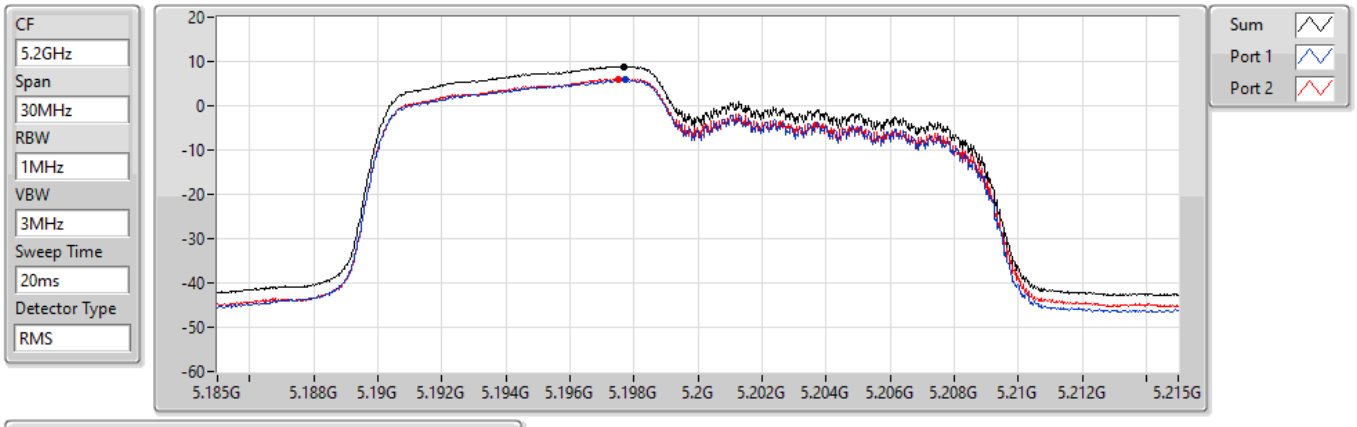

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.90	8.90	5.79	6.03

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5240MHz

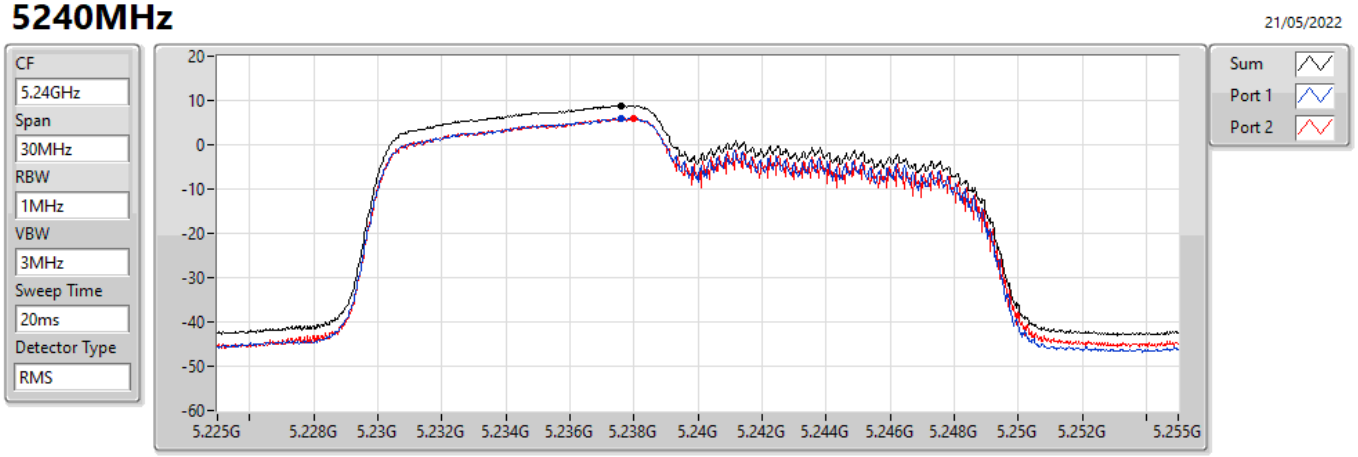

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.89	8.89	5.98	5.88

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5260MHz

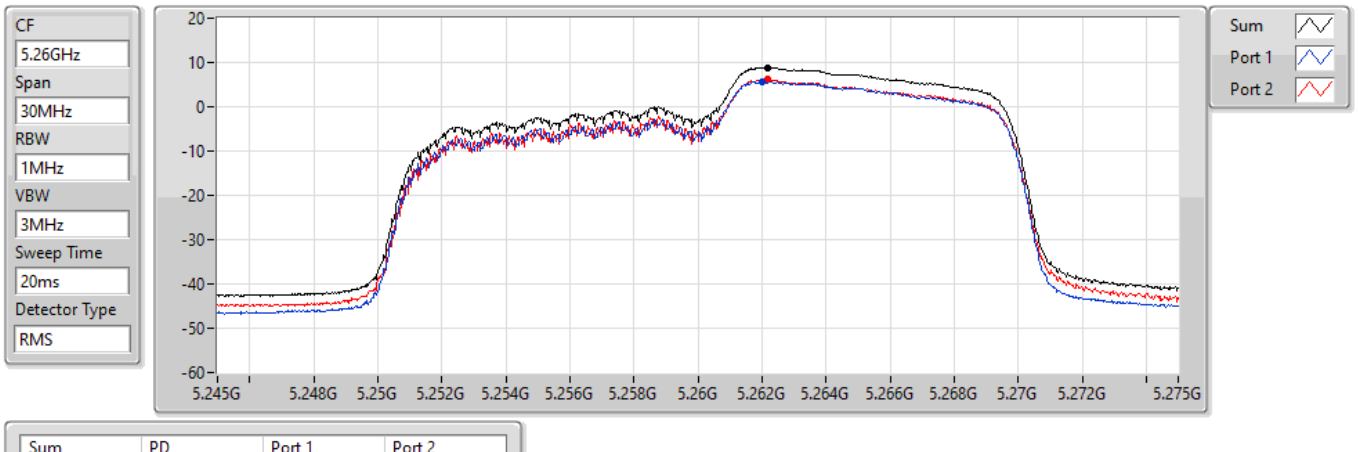

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.87	8.87	5.63	6.16

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5300MHz

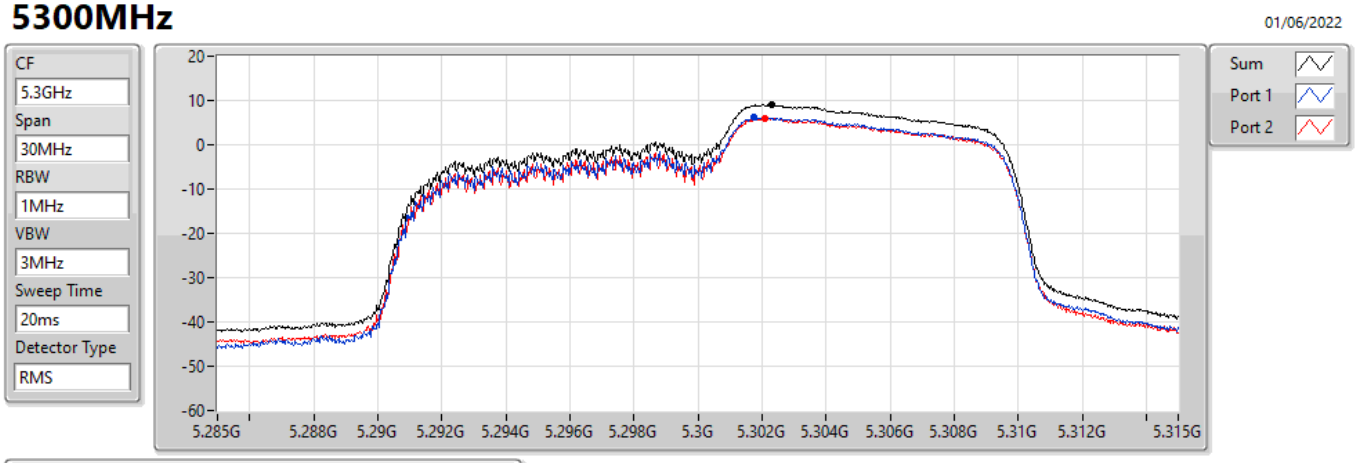

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.03	9.03	6.11	6.07

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5320MHz

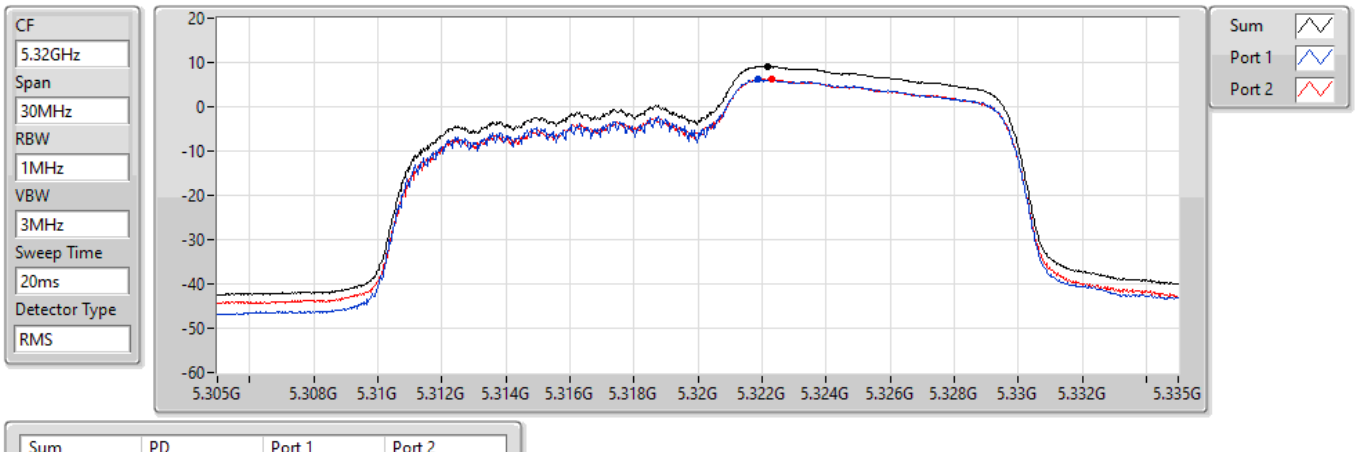

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.07	9.07	6.10	6.18

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5500MHz

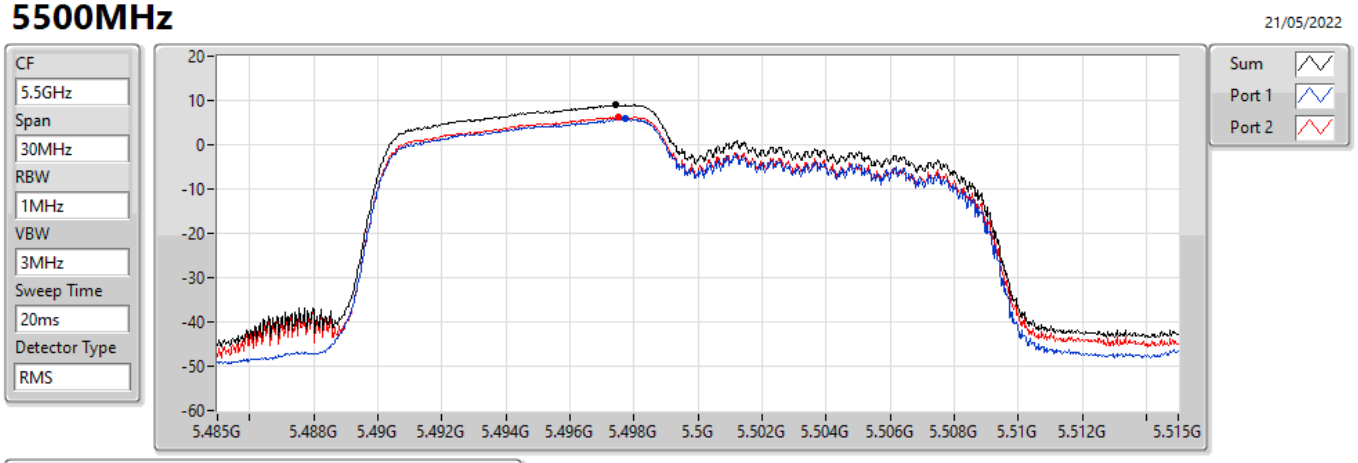

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.96	8.96	5.80	6.21

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5580MHz

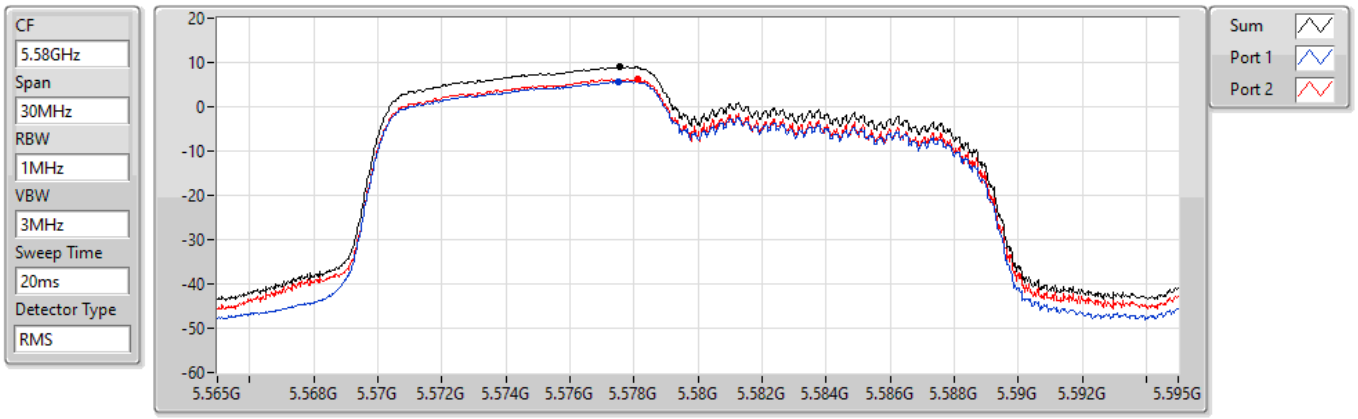

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.98	8.98	5.77	6.27

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5700MHz

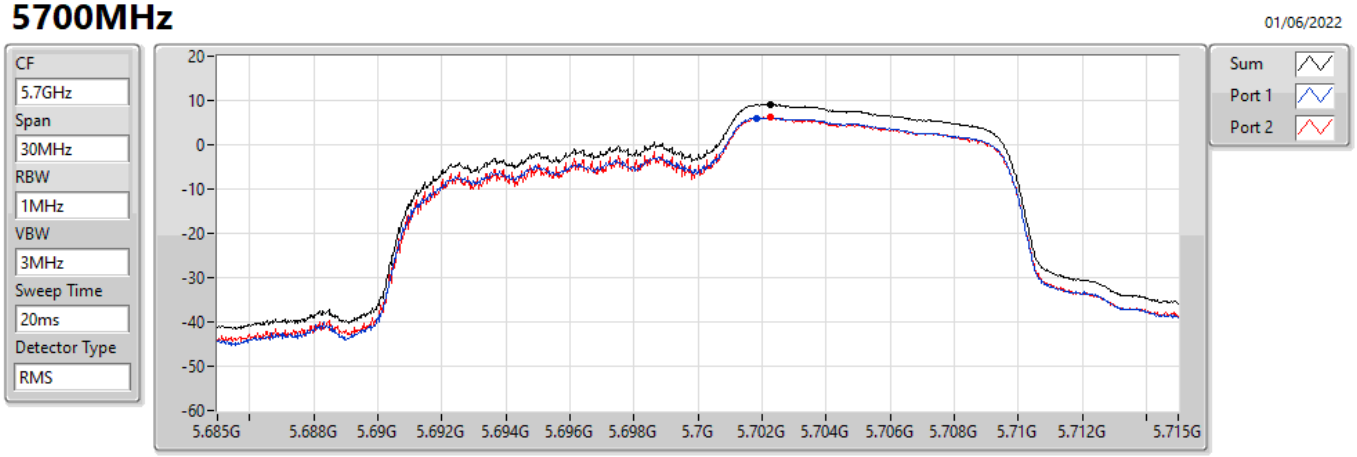

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.09	9.09	6.05	6.19

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.47-5.725GHz

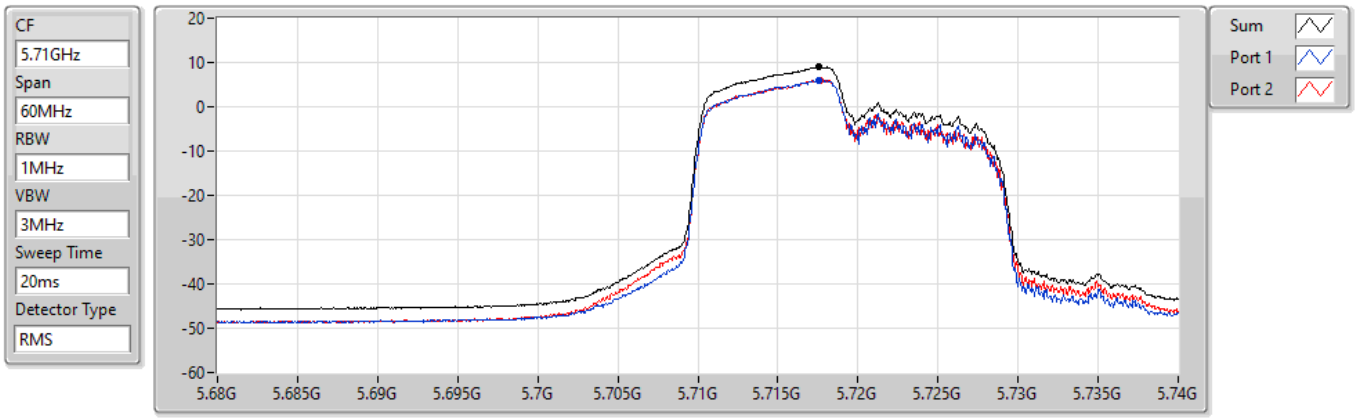

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.00	9.00	6.08	5.98

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.725-5.85GHz

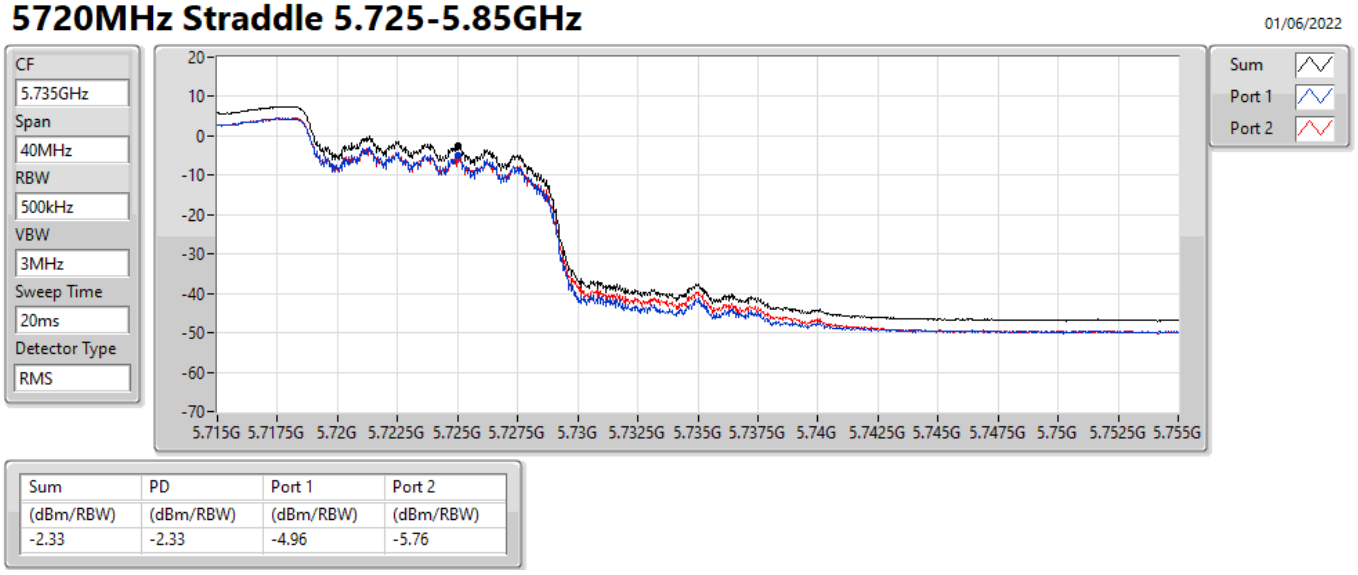

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.33	-2.33	-4.96	-5.76

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5745MHz

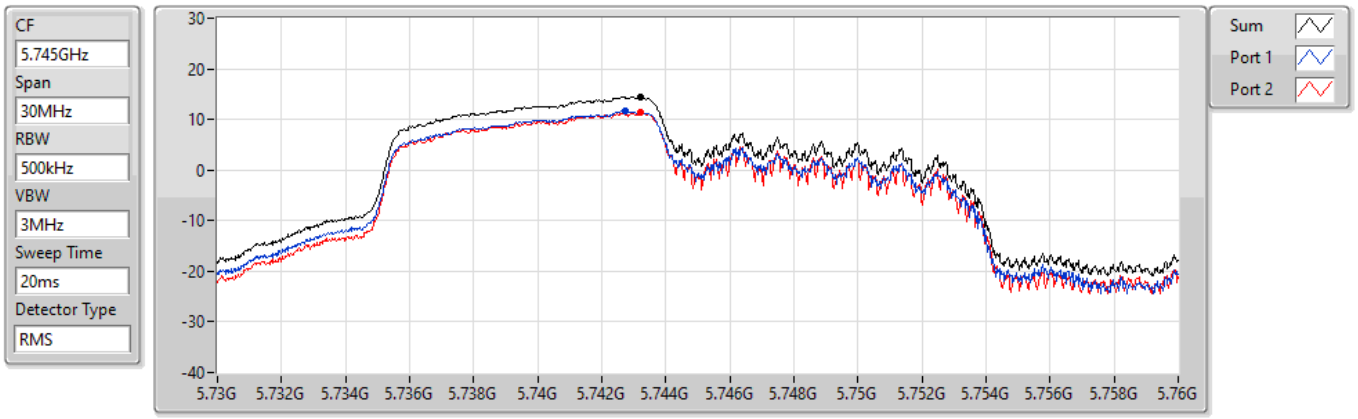

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.45	14.45	11.66	11.48

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5785MHz

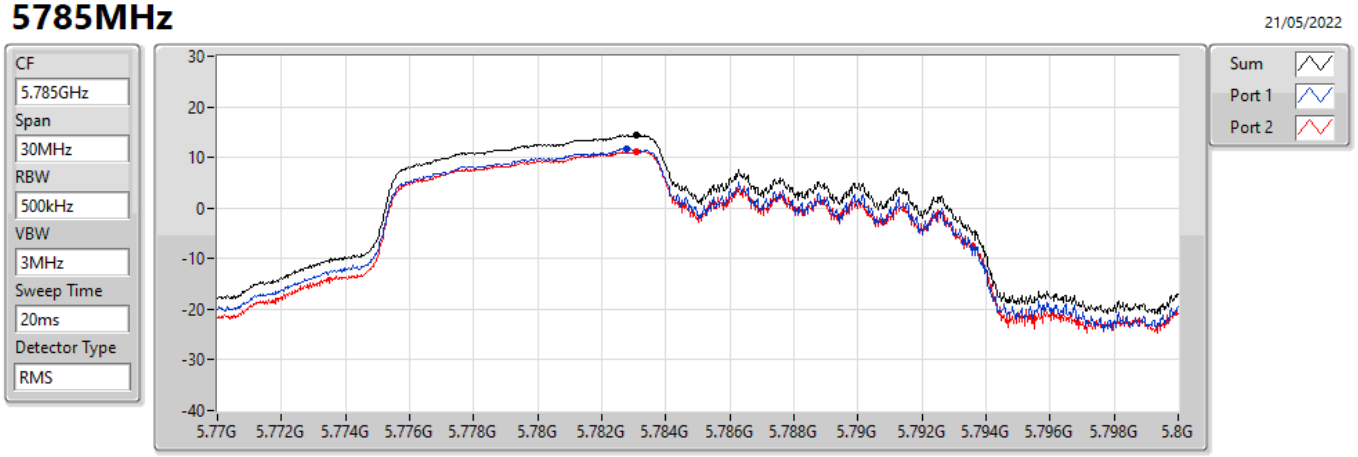

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.35	14.35	11.70	11.16

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5825MHz

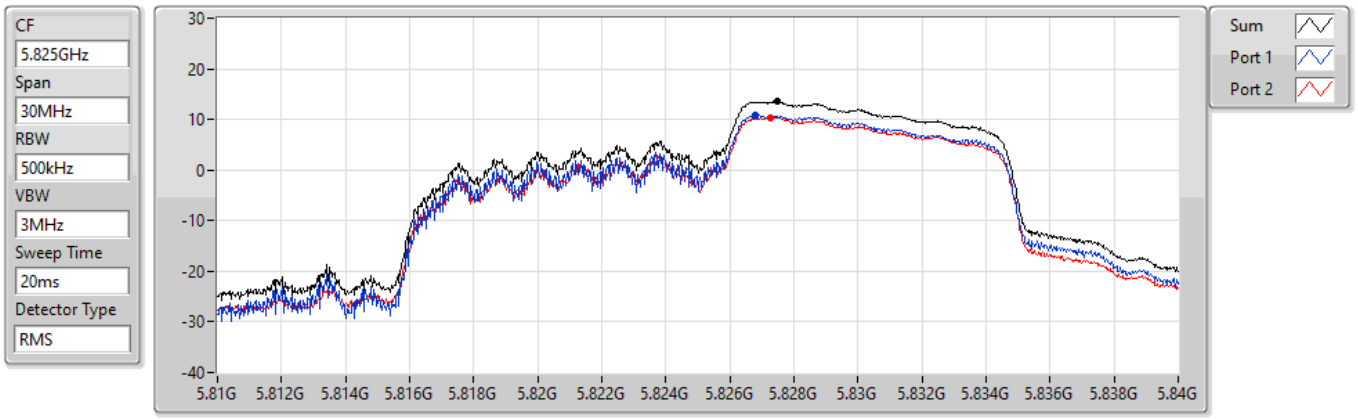

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.51	13.51	10.78	10.37

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.94
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.98
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.98
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	16.99

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	8.01	5.69	6.18	8.93	8.99
5200MHz	Pass	8.01	5.92	6.01	8.94	8.99
5240MHz	Pass	8.01	5.74	5.86	8.81	8.99
5260MHz	Pass	8.01	5.75	5.99	8.87	8.99
5300MHz	Pass	8.01	5.37	6.47	8.94	8.99
5320MHz	Pass	8.01	5.55	6.40	8.98	8.99
5500MHz	Pass	8.01	5.82	5.92	8.84	8.99
5580MHz	Pass	8.01	6.00	5.98	8.96	8.99
5700MHz	Pass	8.01	5.68	5.91	8.78	8.99
5720MHz Straddle 5.47-5.725GHz	Pass	8.01	5.93	6.03	8.98	8.99
5720MHz Straddle 5.725-5.85GHz	Pass	8.01	-17.79	-18.45	-16.57	27.99
5745MHz	Pass	8.01	14.06	13.94	16.99	27.99
5785MHz	Pass	8.01	11.97	12.30	15.15	27.99
5825MHz	Pass	8.01	10.70	11.19	13.94	27.99

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5180MHz

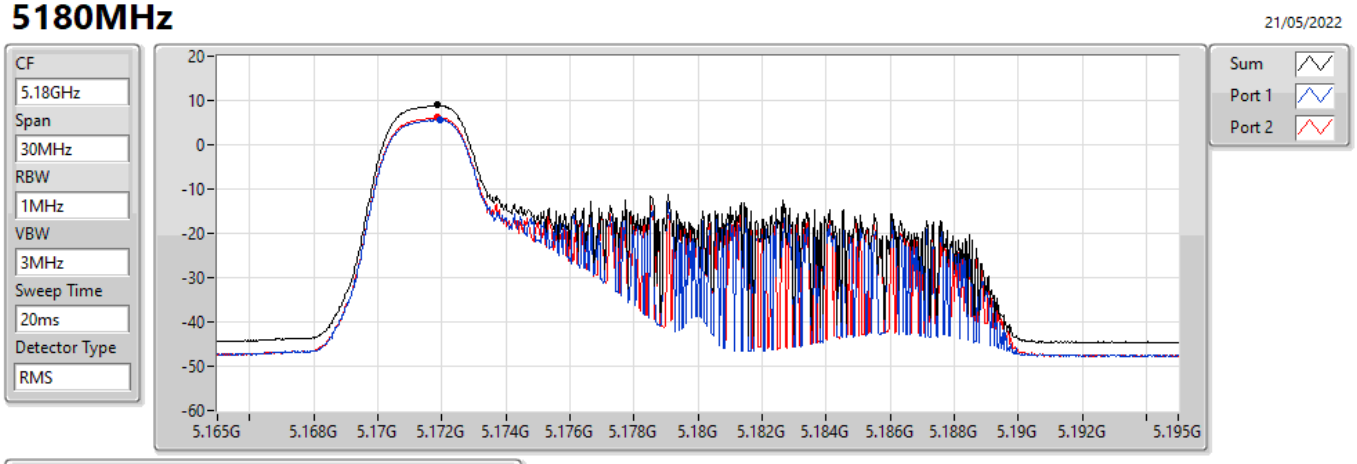

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.93	8.93	5.69	6.18

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5200MHz

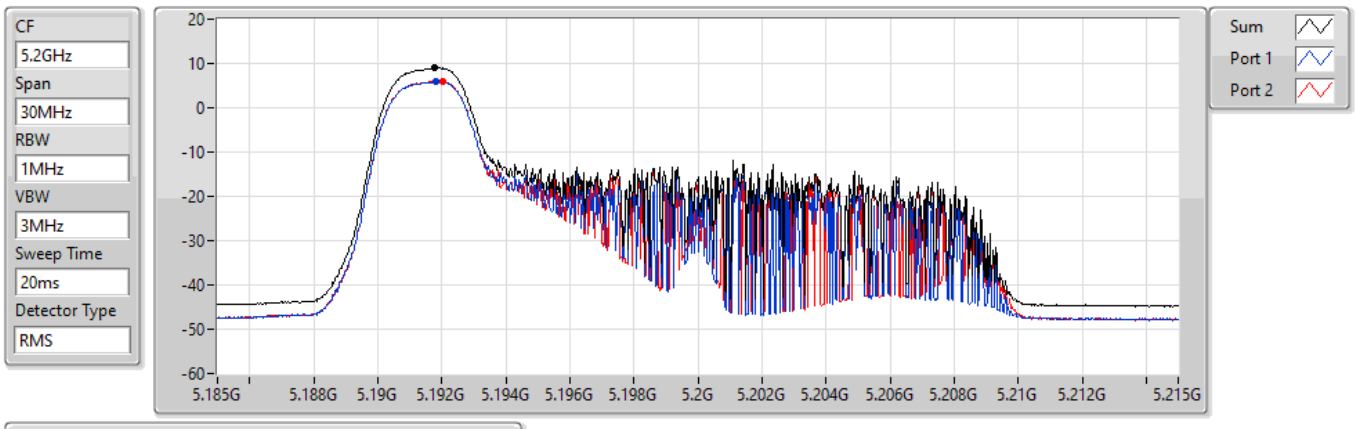

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.94	8.94	5.92	6.01

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5240MHz

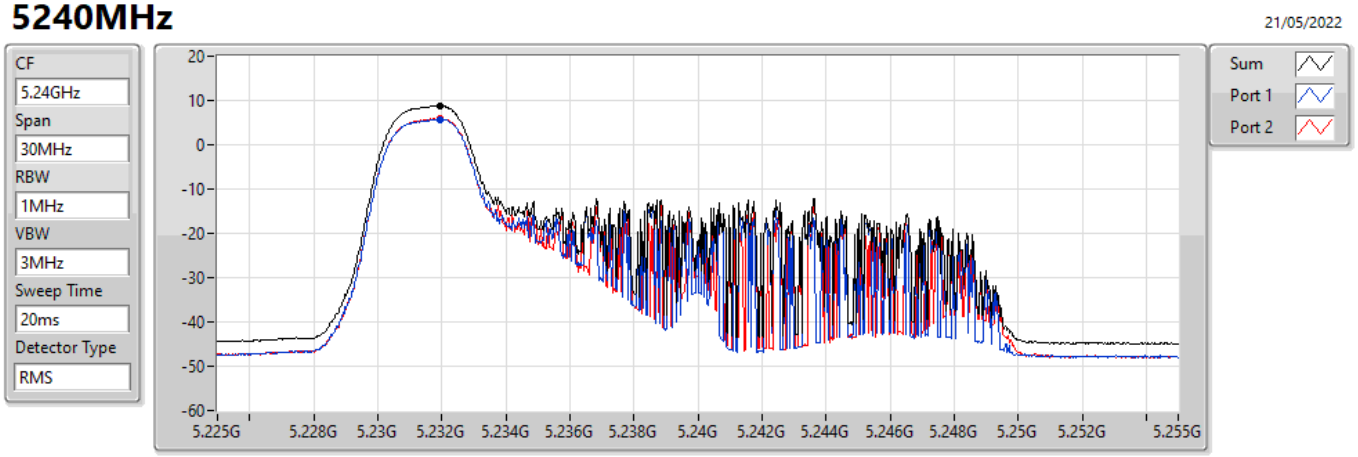

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.81	8.81	5.74	5.86

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5260MHz

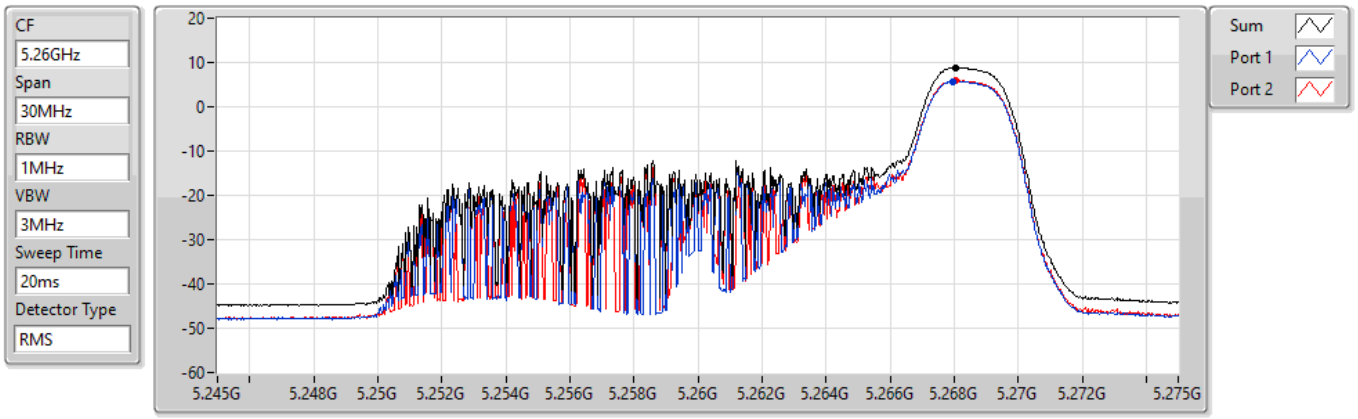

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.87	8.87	5.75	5.99

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5300MHz

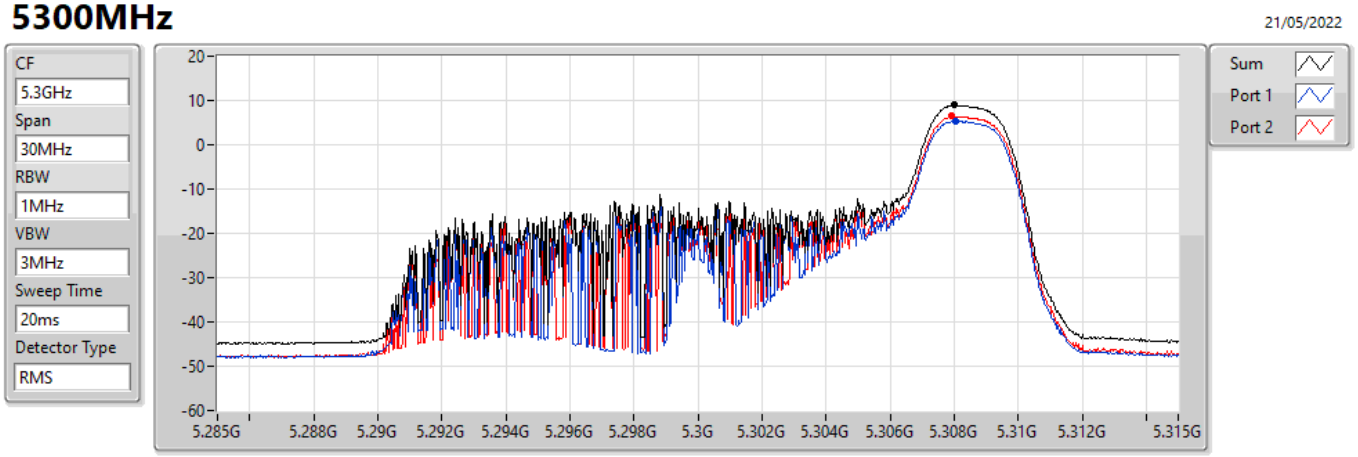

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.94	8.94	5.37	6.47

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5320MHz

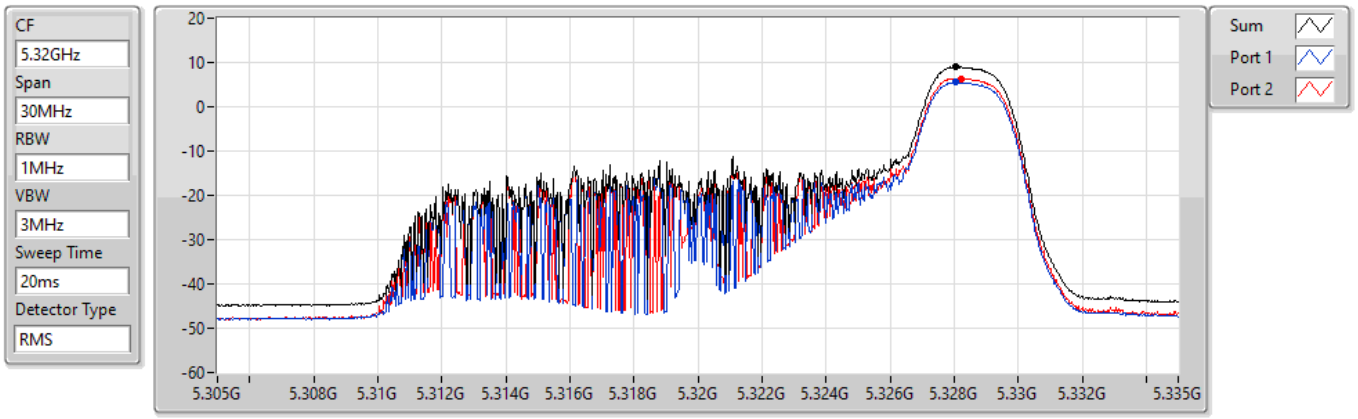

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.98	8.98	5.55	6.40

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5500MHz

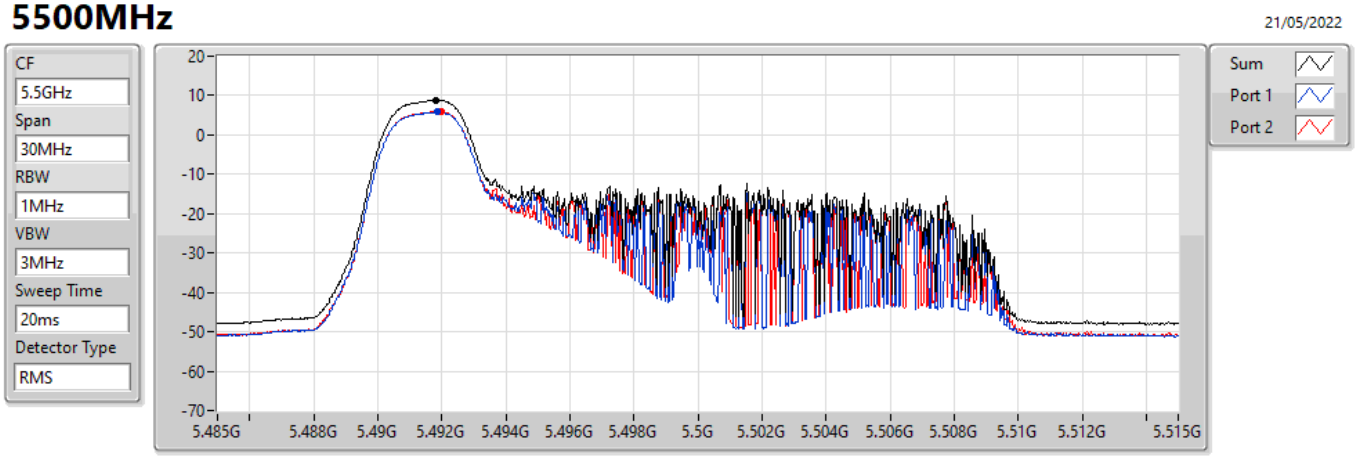

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.84	8.84	5.82	5.92

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5580MHz

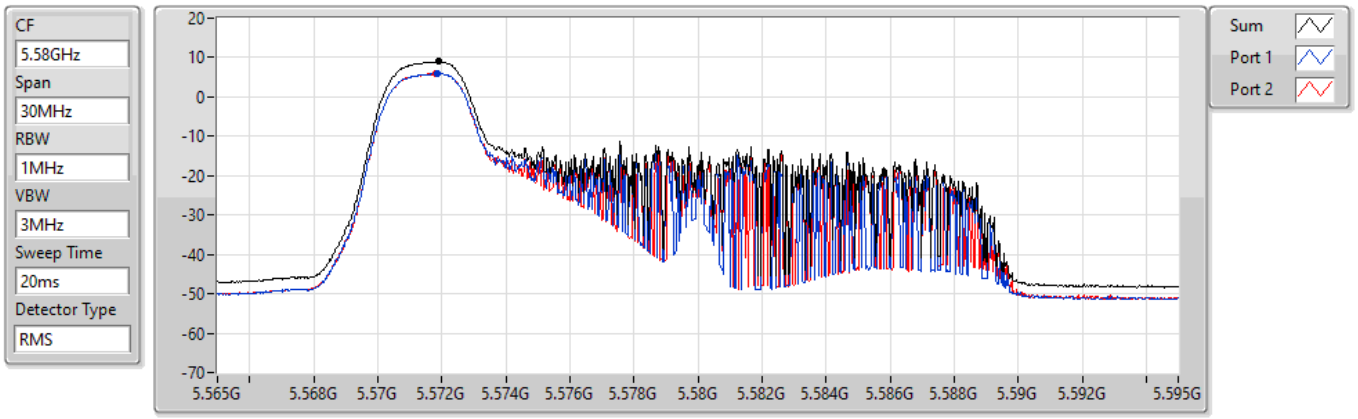

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.96	8.96	6.00	5.98

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5700MHz

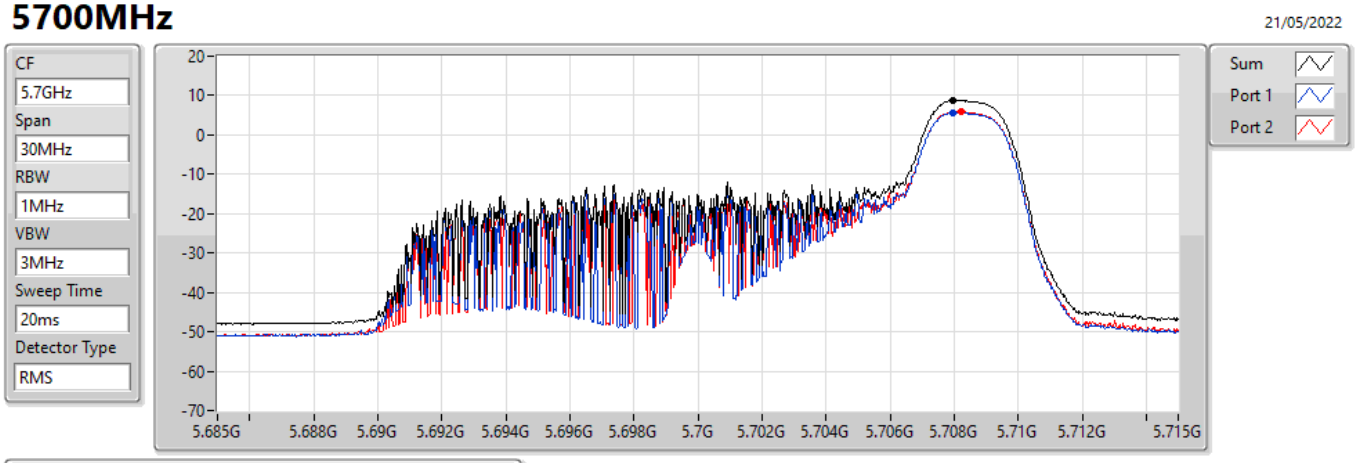

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.78	8.78	5.68	5.91

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5720MHz Straddle 5.47-5.725GHz

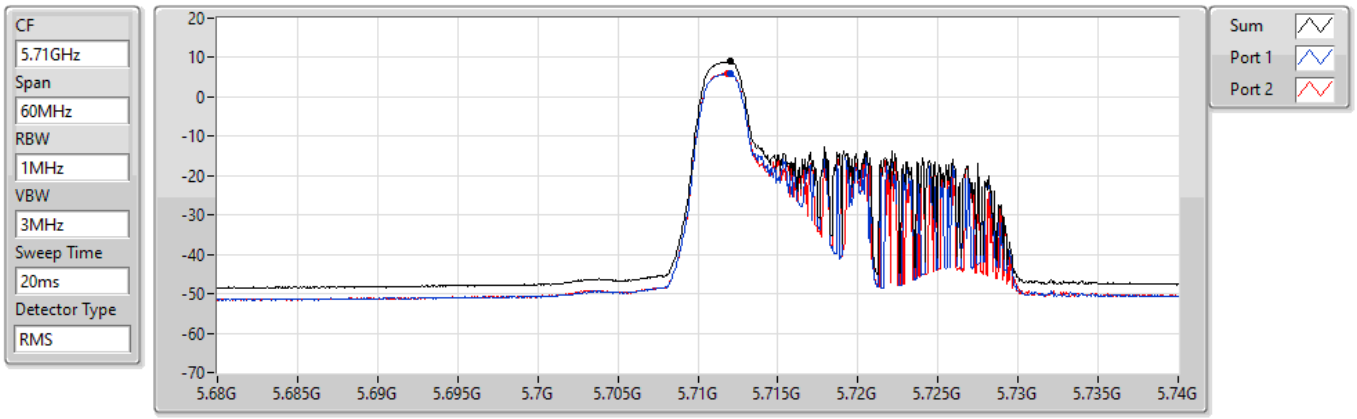


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.98	8.98	5.93	6.03

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5720MHz Straddle 5.725-5.85GHz

21/05/2022

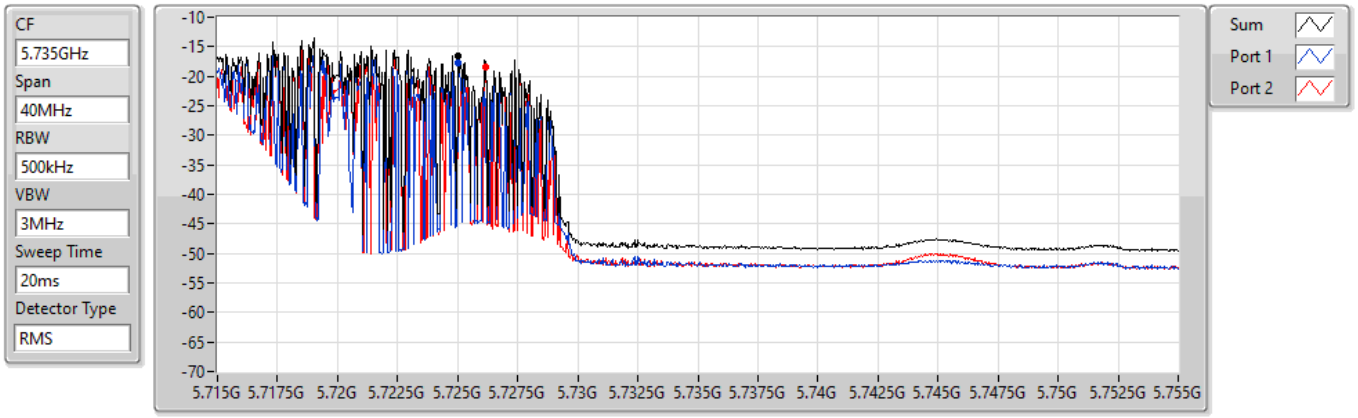


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-16.57	-16.57	-17.79	-18.45

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5745MHz


01/06/2022

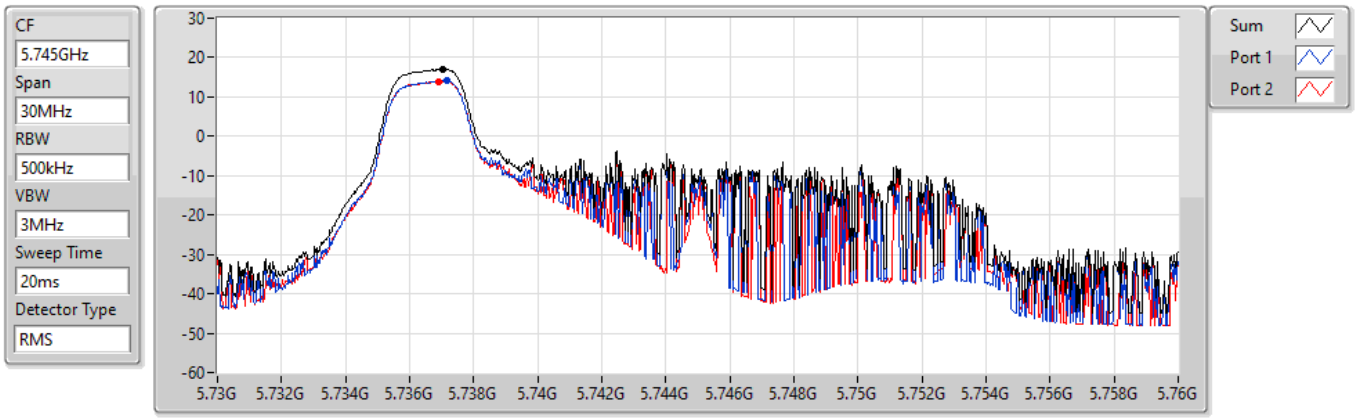

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
16.99	16.99	14.06	13.94

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5785MHz

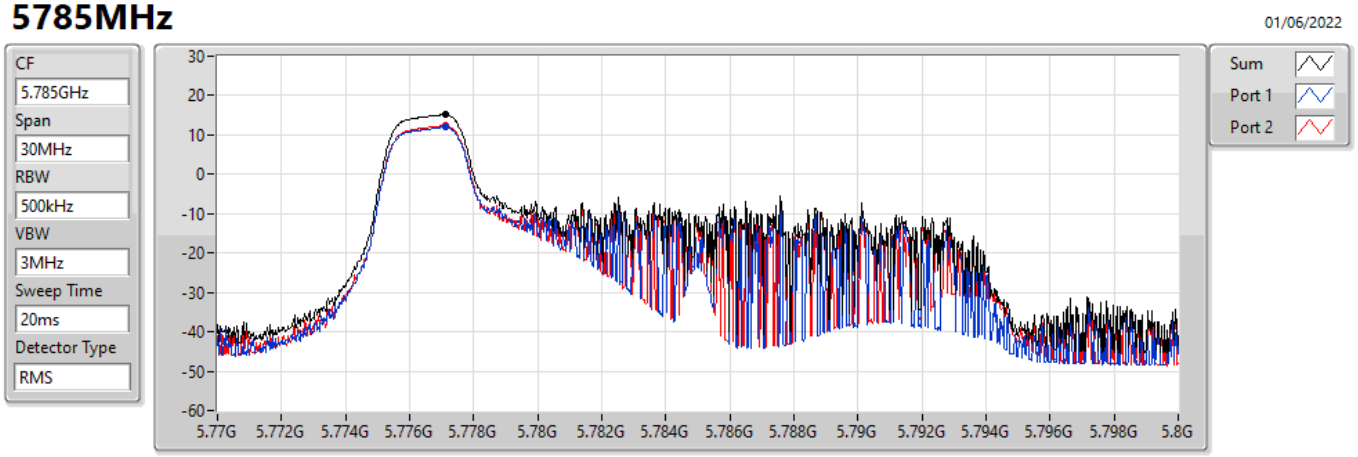

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.15	15.15	11.97	12.30

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5825MHz

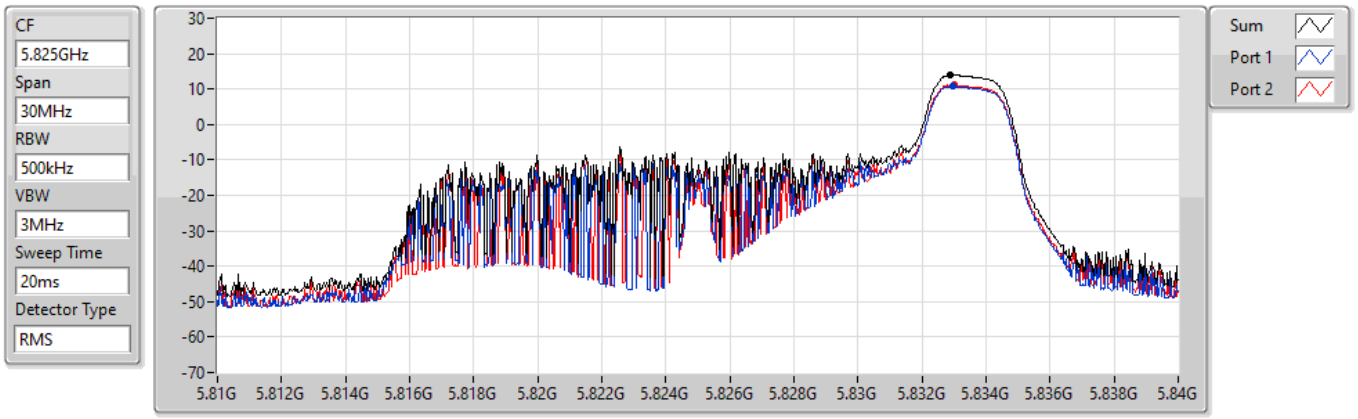

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.94	13.94	10.70	11.19

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.98	16.99
5.25-5.35GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.93	16.94
5.47-5.725GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.98	16.99
5.725-5.85GHz	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	15.31	23.32

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5180MHz	Pass	8.01	5.53	6.29	8.90	8.99	16.91	17.00
5200MHz	Pass	8.01	5.93	6.00	8.94	8.99	16.95	17.00
5240MHz	Pass	8.01	5.98	6.13	8.98	8.99	16.99	17.00
5260MHz	Pass	8.01	5.73	6.13	8.88	8.99	16.89	17.00
5300MHz	Pass	8.01	6.10	6.06	8.93	8.99	16.94	17.00
5320MHz	Pass	8.01	5.76	5.97	8.84	8.99	16.85	17.00
5500MHz	Pass	8.01	5.87	6.28	8.98	8.99	16.99	17.00
5580MHz	Pass	8.01	5.64	5.90	8.77	8.99	16.78	17.00
5700MHz	Pass	8.01	5.80	6.11	8.92	8.99	16.93	17.00
5720MHz Straddle 5.47-5.725GHz	Pass	8.01	5.52	6.44	8.93	8.99	16.94	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	8.01	-6.04	-6.20	-3.76	27.99	4.25	36.00
5745MHz	Pass	8.01	12.06	12.63	15.20	27.99	23.21	36.00
5785MHz	Pass	8.01	12.17	12.61	15.31	27.99	23.32	36.00
5825MHz	Pass	8.01	12.23	11.30	14.79	27.99	22.80	36.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5180MHz

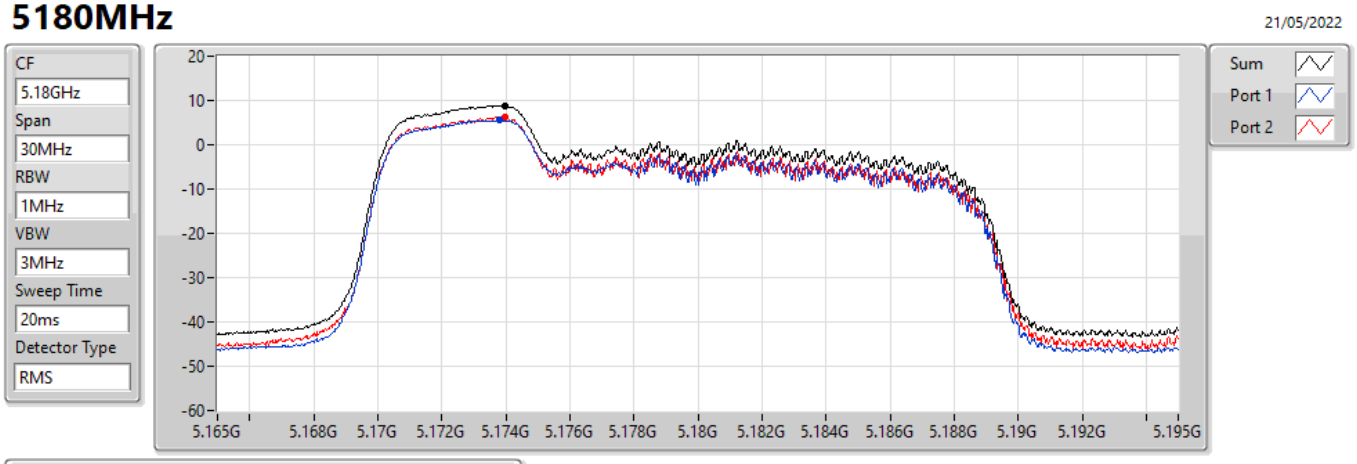

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.90	8.90	5.53	6.29

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5200MHz

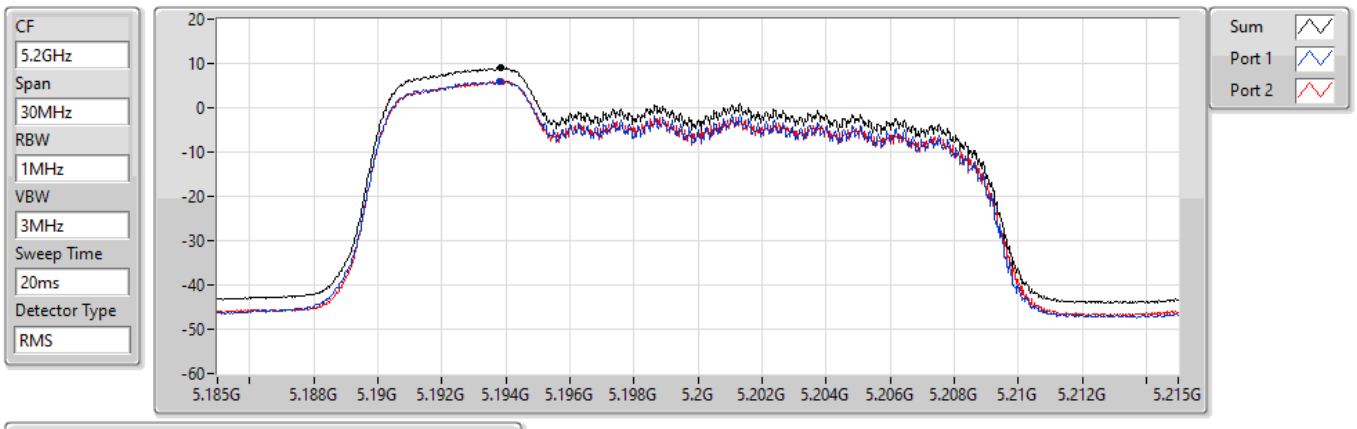

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.94	8.94	5.93	6.00

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5240MHz

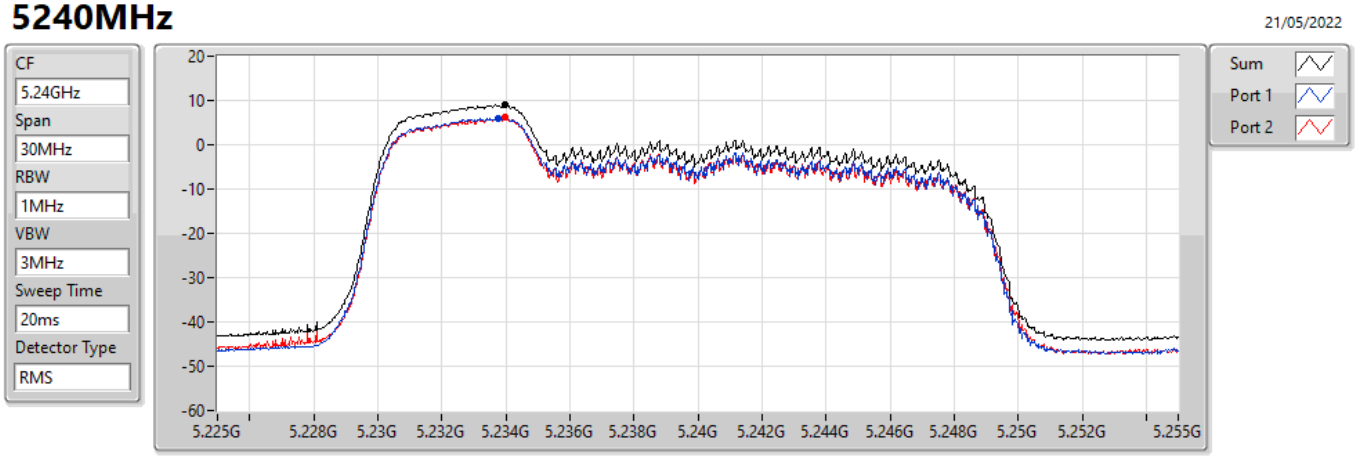

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.98	8.98	5.98	6.13

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5260MHz

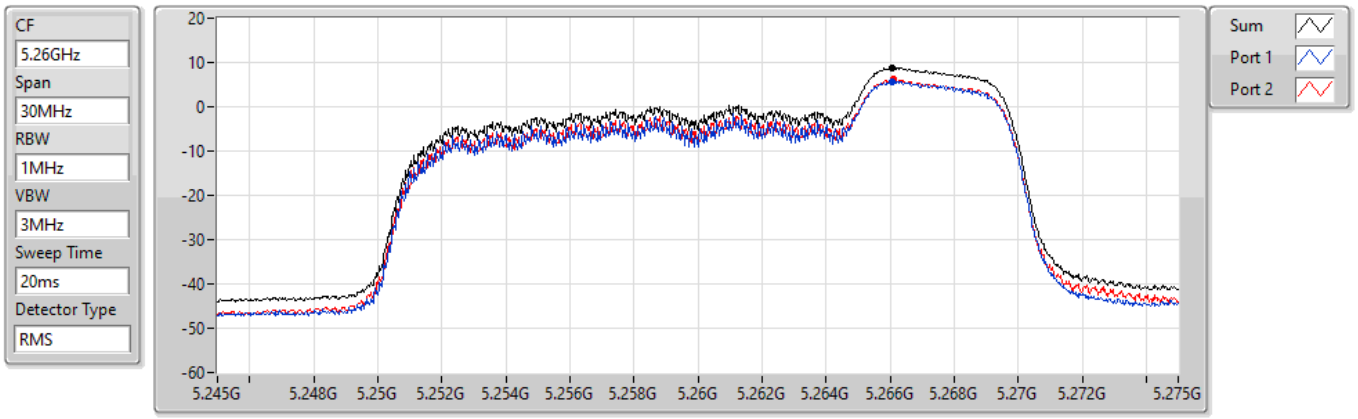

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.88	8.88	5.73	6.13

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5300MHz

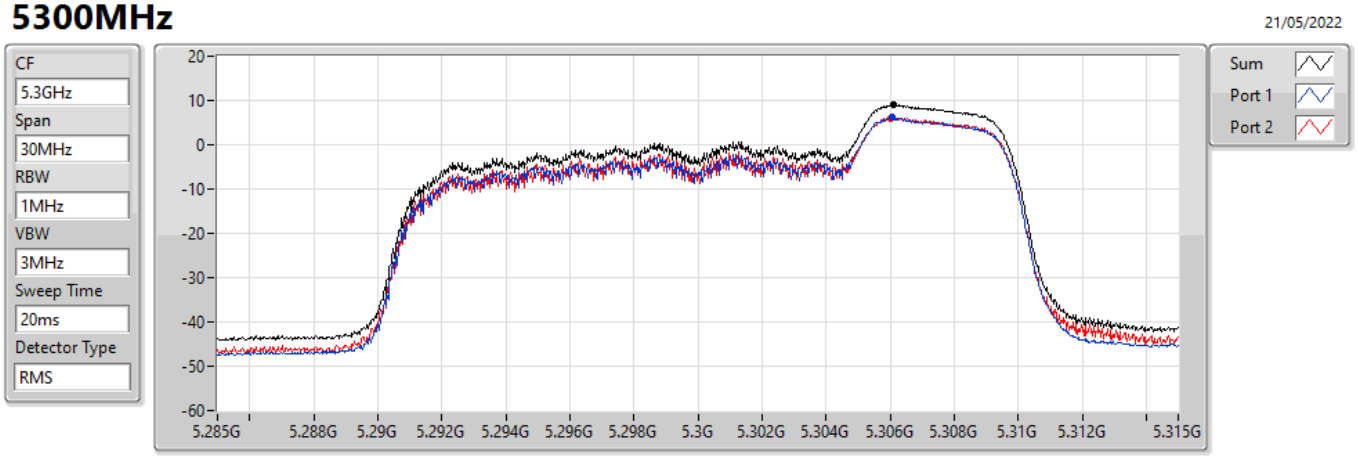

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.93	8.93	6.10	6.06

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5320MHz

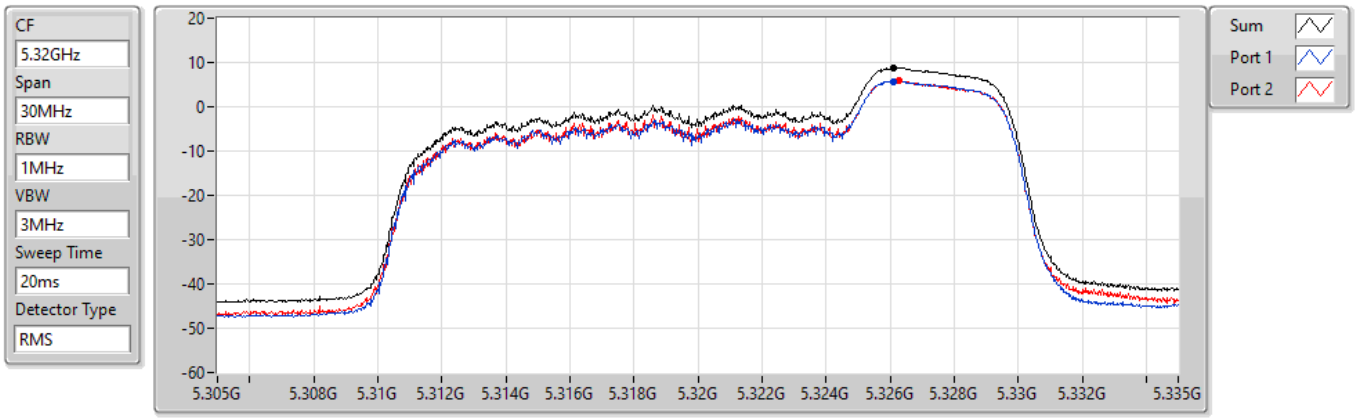

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.84	8.84	5.76	5.97

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5500MHz

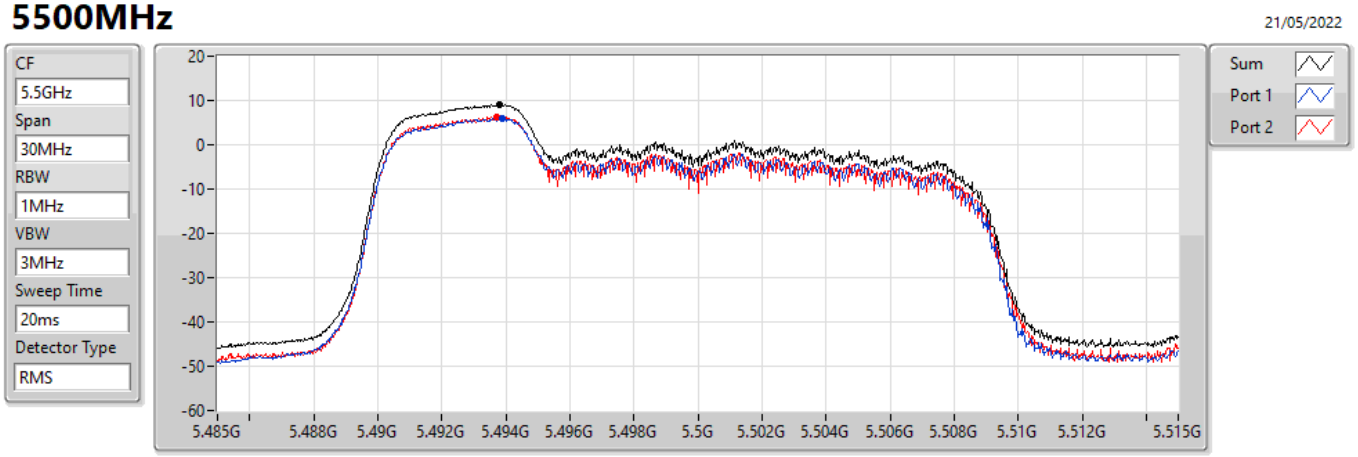

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.98	8.98	5.87	6.28

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5580MHz

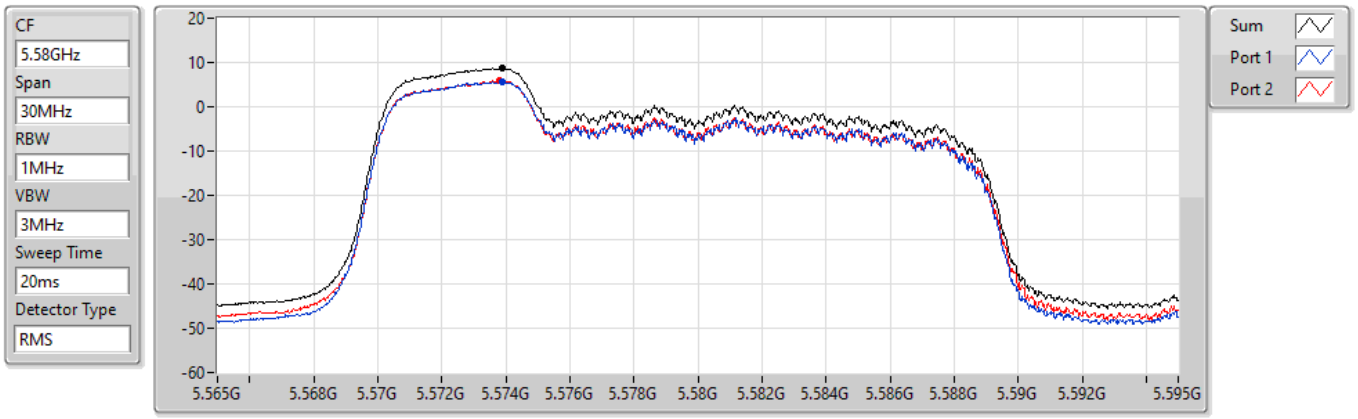

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.77	8.77	5.64	5.90

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5700MHz

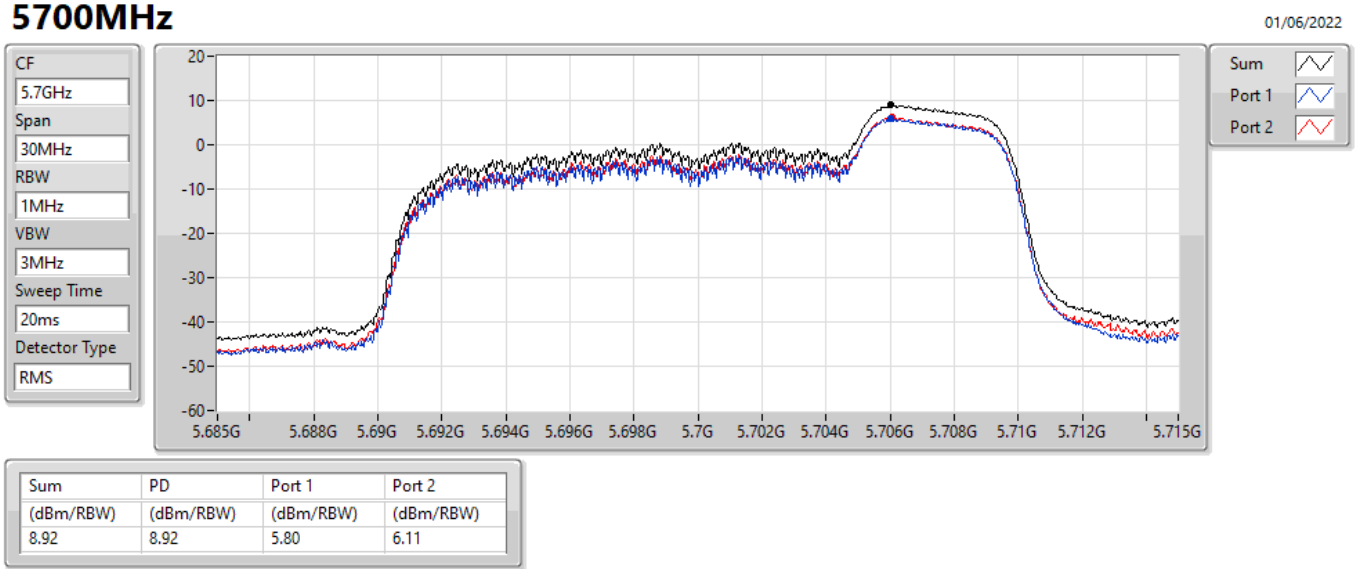

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.92	8.92	5.80	6.11

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.47-5.725GHz

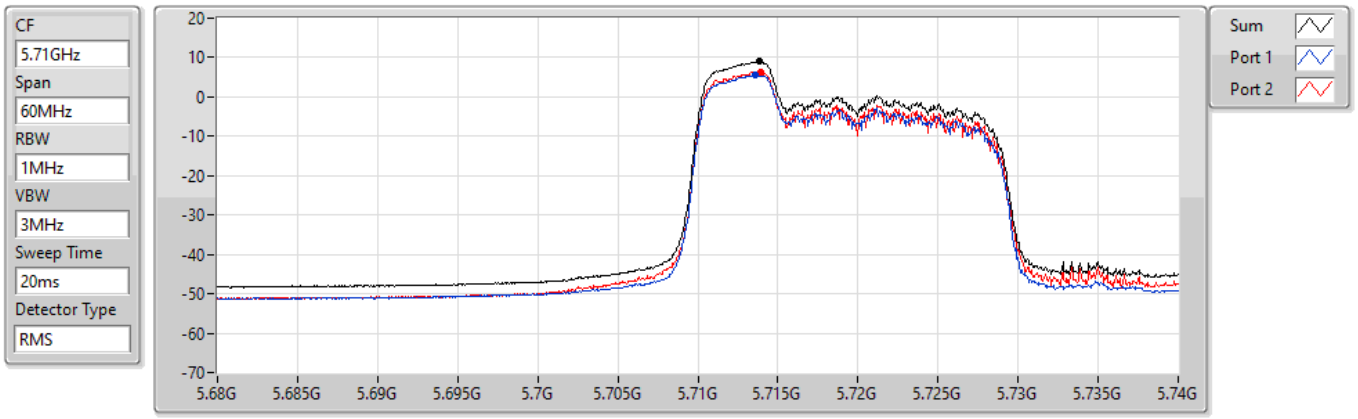

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.93	8.93	5.52	6.44

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.725-5.85GHz

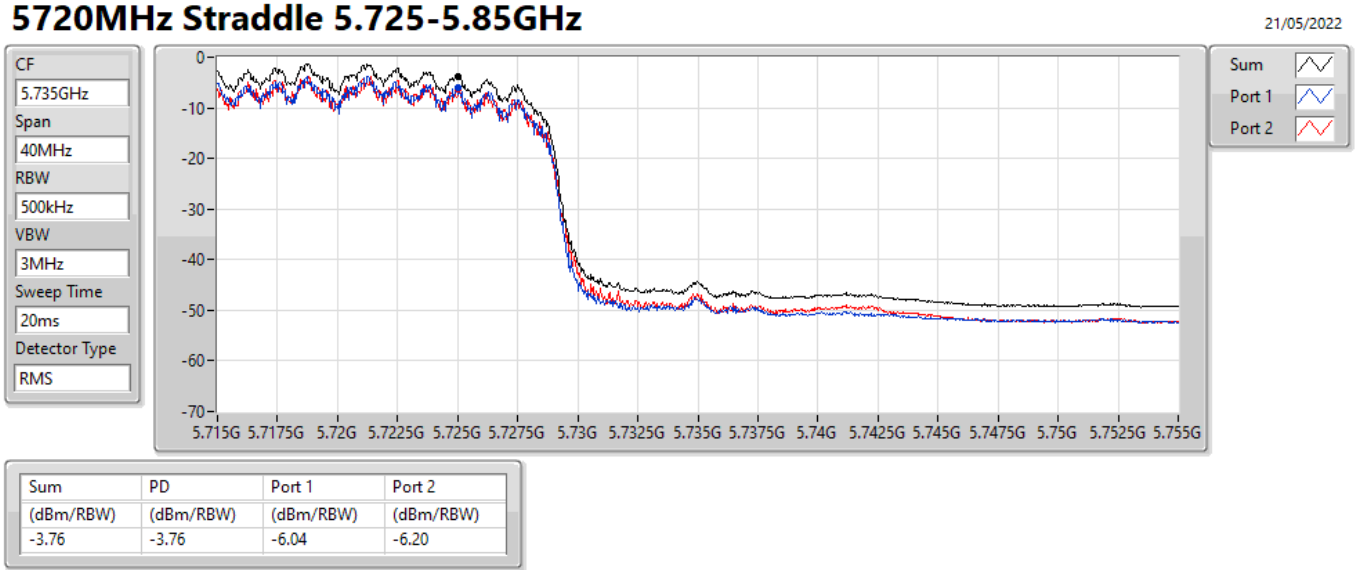

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.76	-3.76	-6.04	-6.20

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5745MHz

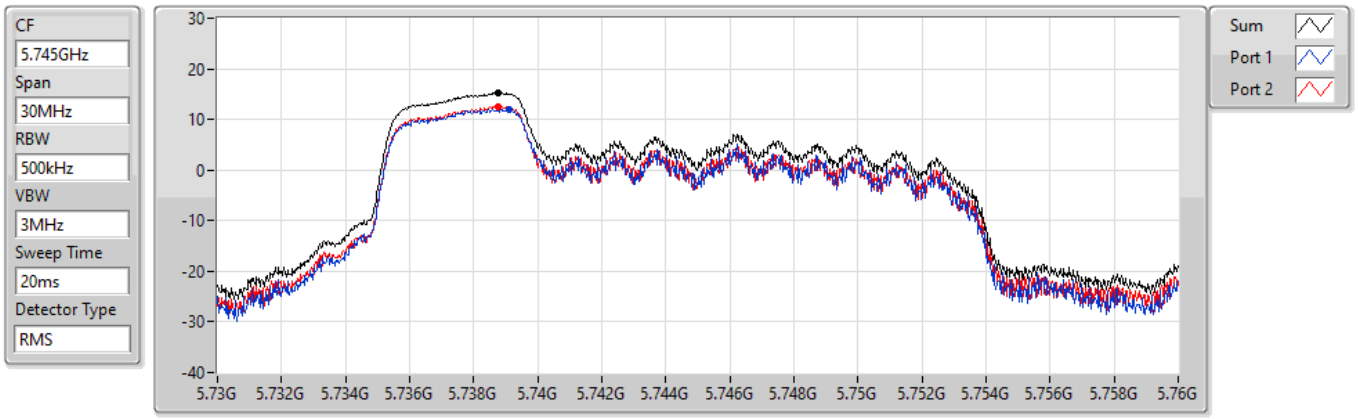

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.20	15.20	12.06	12.63

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5785MHz

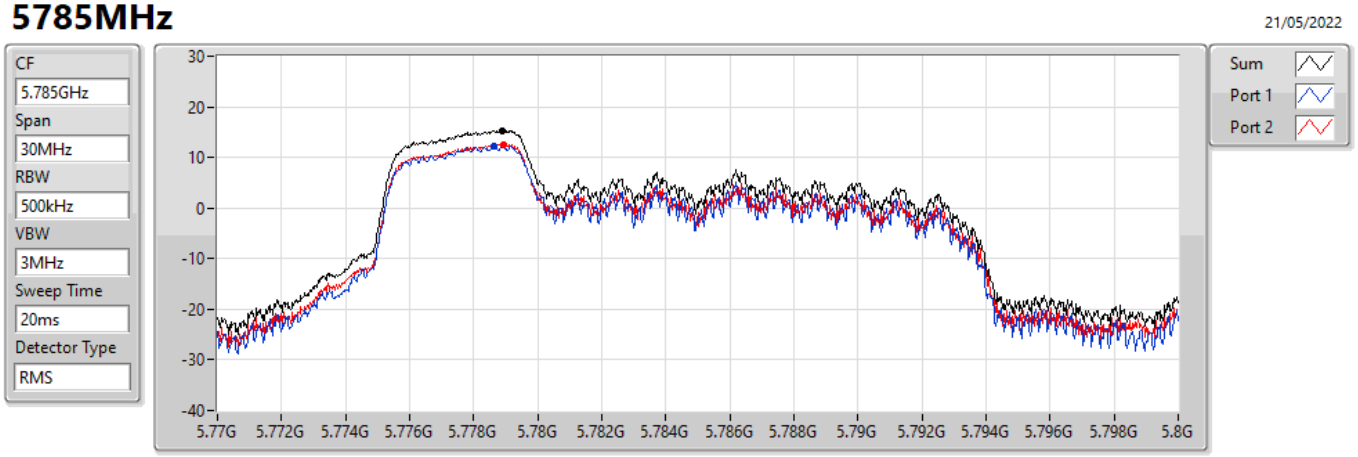

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.31	15.31	12.17	12.61

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5825MHz

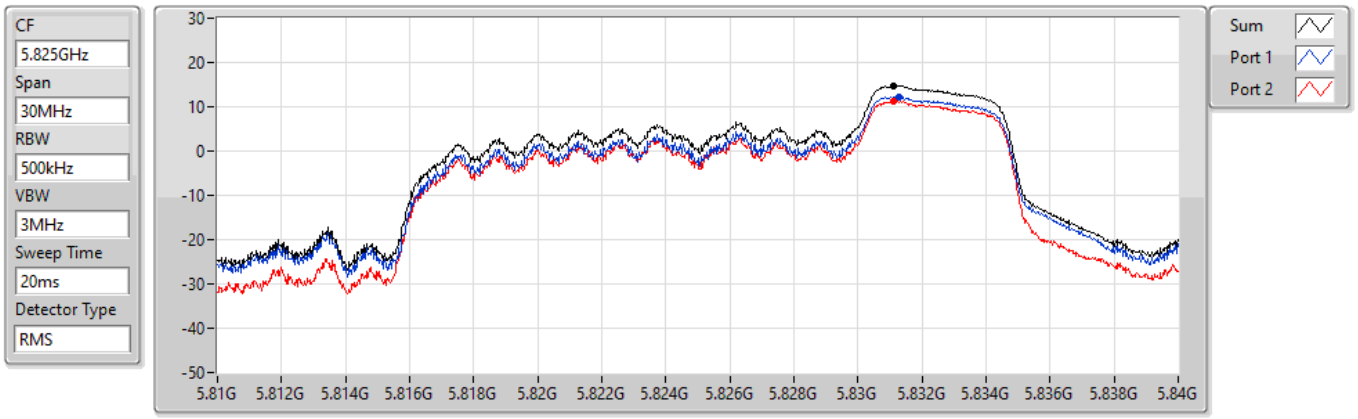

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.79	14.79	12.23	11.30

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.92
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.87
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.98
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	14.45

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	8.01	5.93	5.89	8.92	8.99
5200MHz	Pass	8.01	5.79	6.03	8.90	8.99
5240MHz	Pass	8.01	5.98	5.88	8.89	8.99
5260MHz	Pass	8.01	5.63	6.16	8.87	8.99
5300MHz	Pass	8.01	5.62	6.10	8.80	8.99
5320MHz	Pass	8.01	5.57	6.03	8.79	8.99
5500MHz	Pass	8.01	5.80	6.21	8.96	8.99
5580MHz	Pass	8.01	5.77	6.27	8.98	8.99
5700MHz	Pass	8.01	5.29	5.35	8.24	8.99
5720MHz Straddle 5.47-5.725GHz	Pass	8.01	5.60	6.14	8.78	8.99
5720MHz Straddle 5.725-5.85GHz	Pass	8.01	-6.18	-6.42	-3.34	27.99
5745MHz	Pass	8.01	11.66	11.48	14.45	27.99
5785MHz	Pass	8.01	11.70	11.16	14.35	27.99
5825MHz	Pass	8.01	10.78	10.37	13.51	27.99

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5180MHz

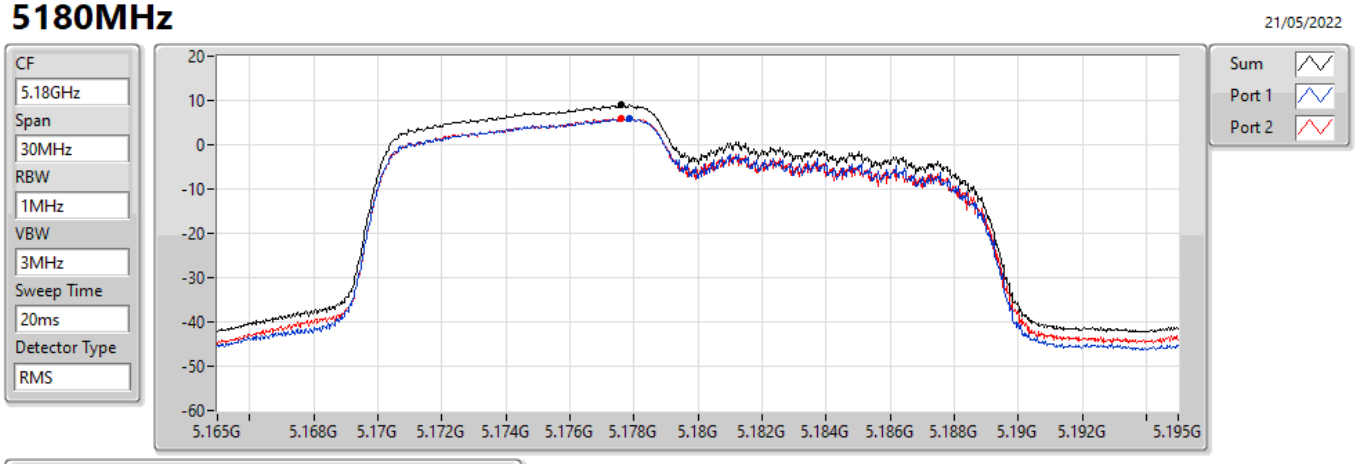

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.92	8.92	5.93	5.89

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5200MHz

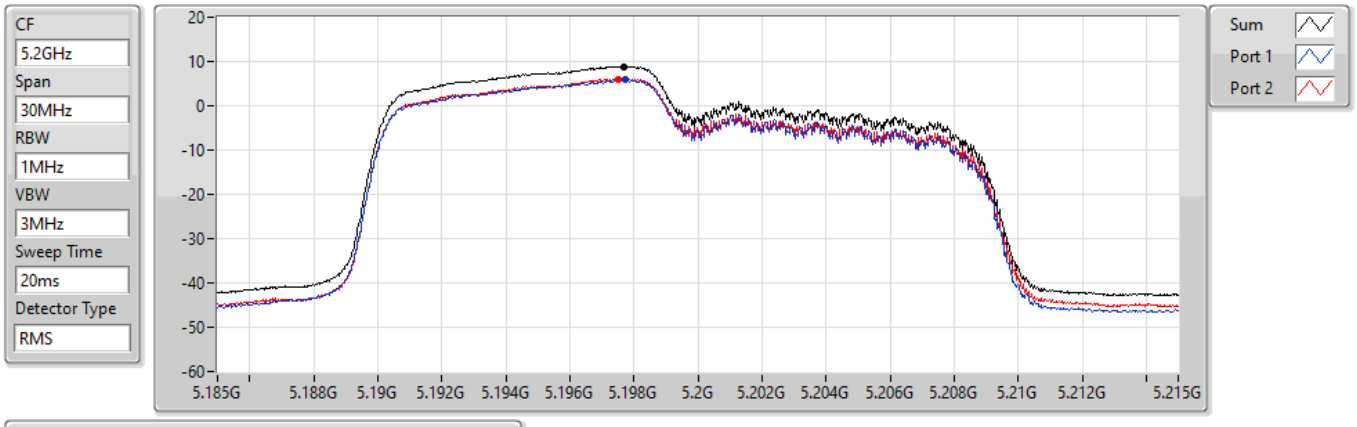

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.90	8.90	5.79	6.03

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5240MHz

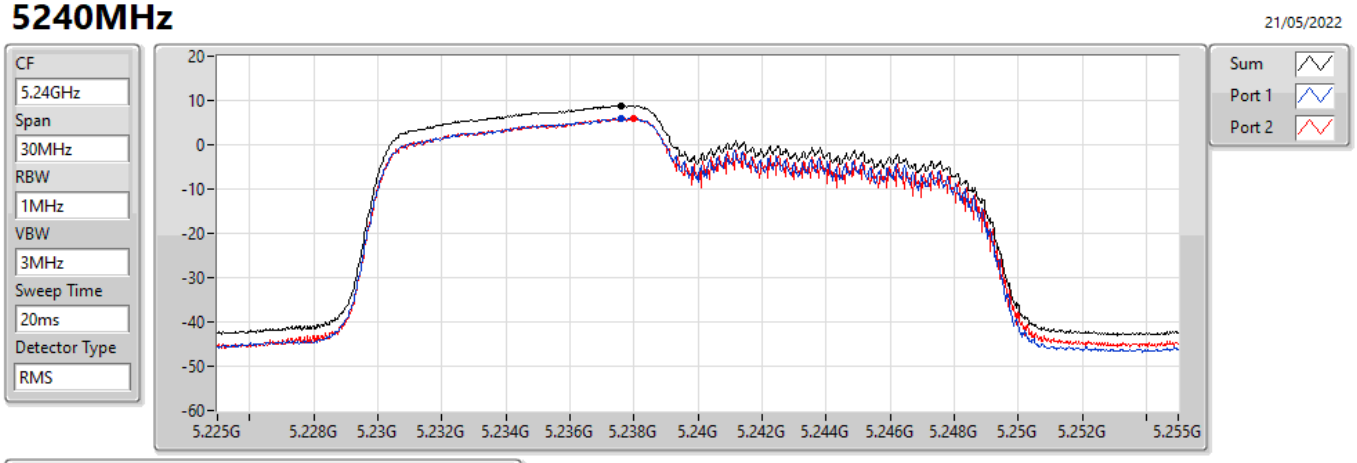

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.89	8.89	5.98	5.88

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5260MHz

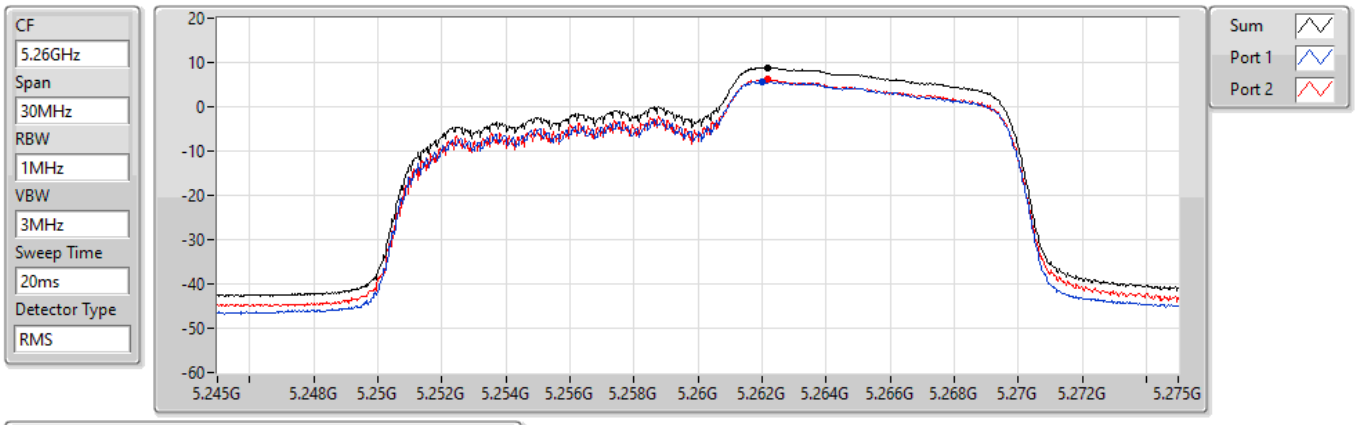

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.87	8.87	5.63	6.16

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5300MHz

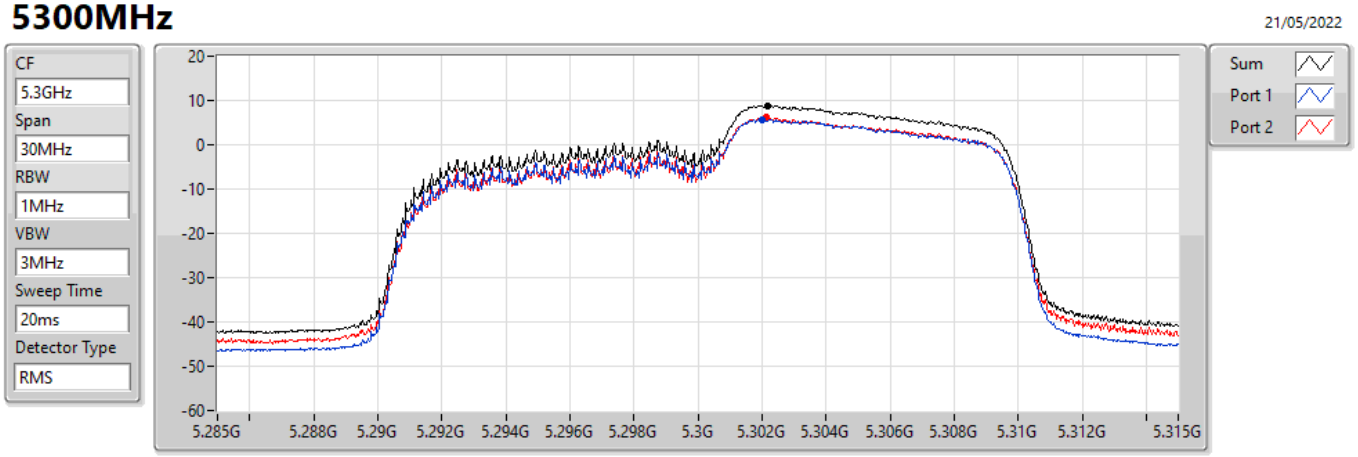

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.80	8.80	5.62	6.10

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5320MHz

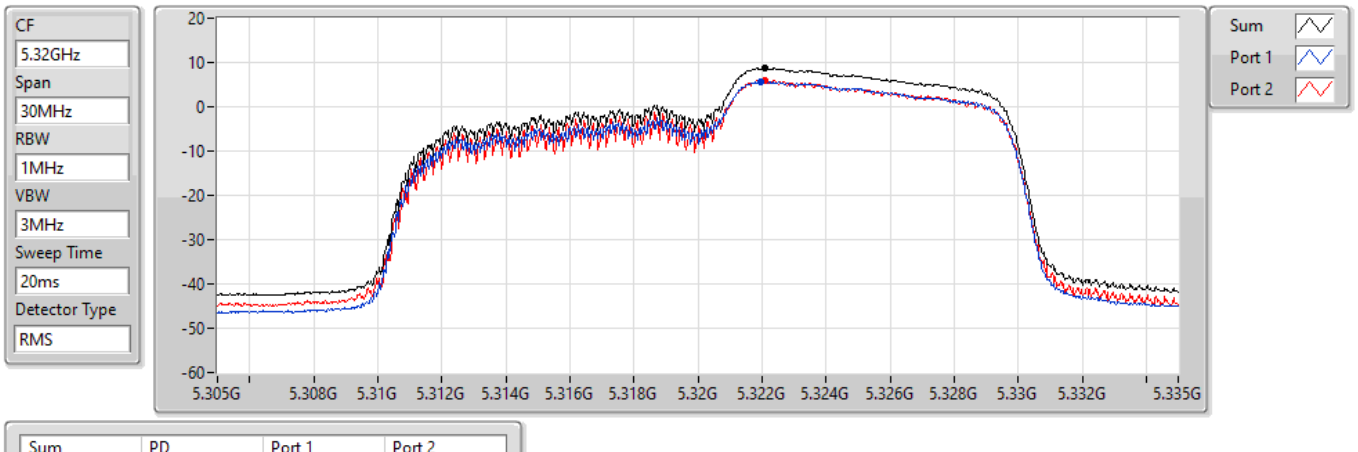

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.79	8.79	5.57	6.03

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5500MHz

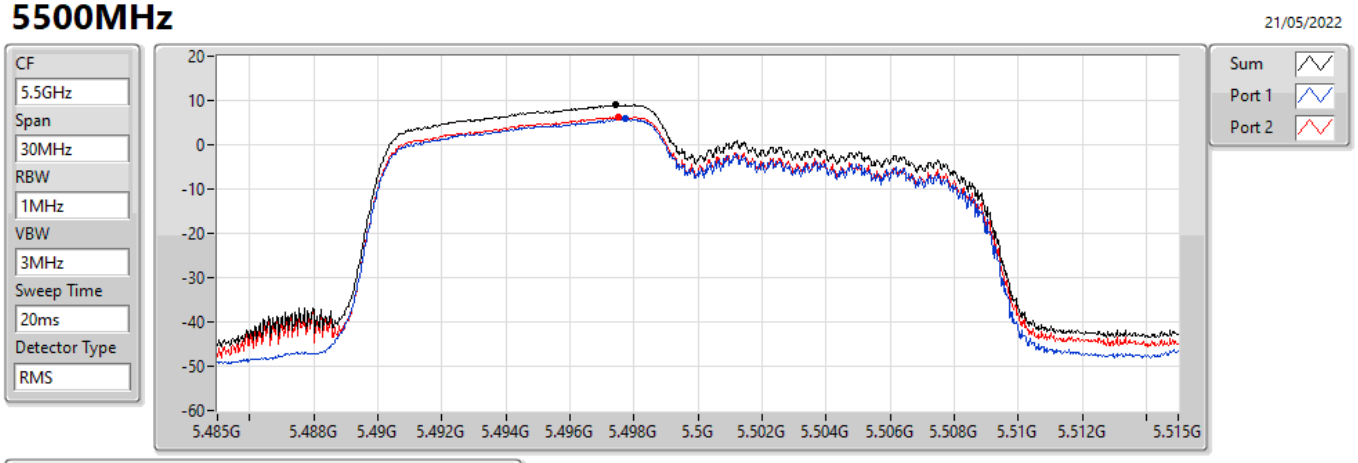

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.96	8.96	5.80	6.21

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5580MHz

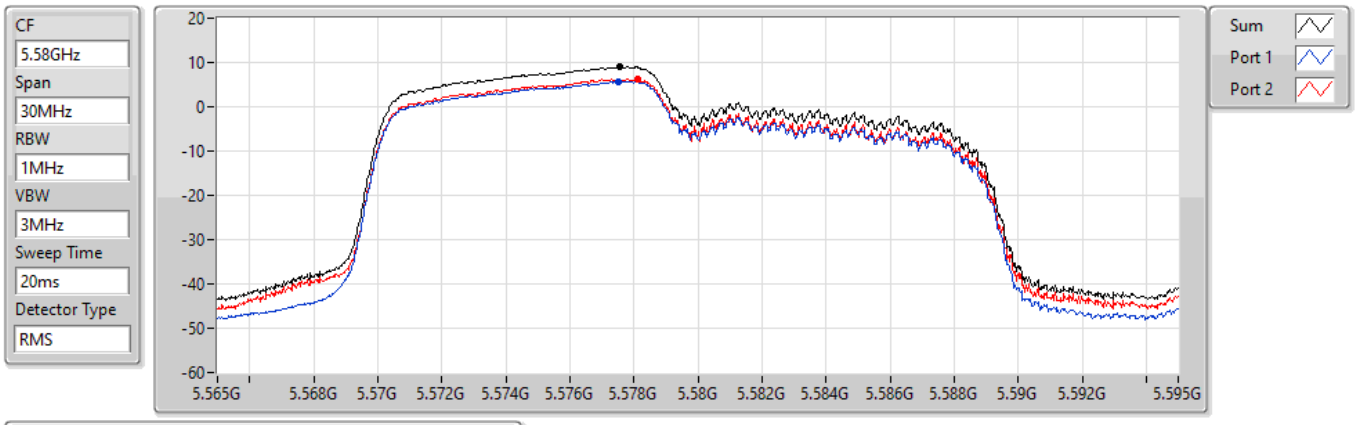

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.98	8.98	5.77	6.27

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5700MHz

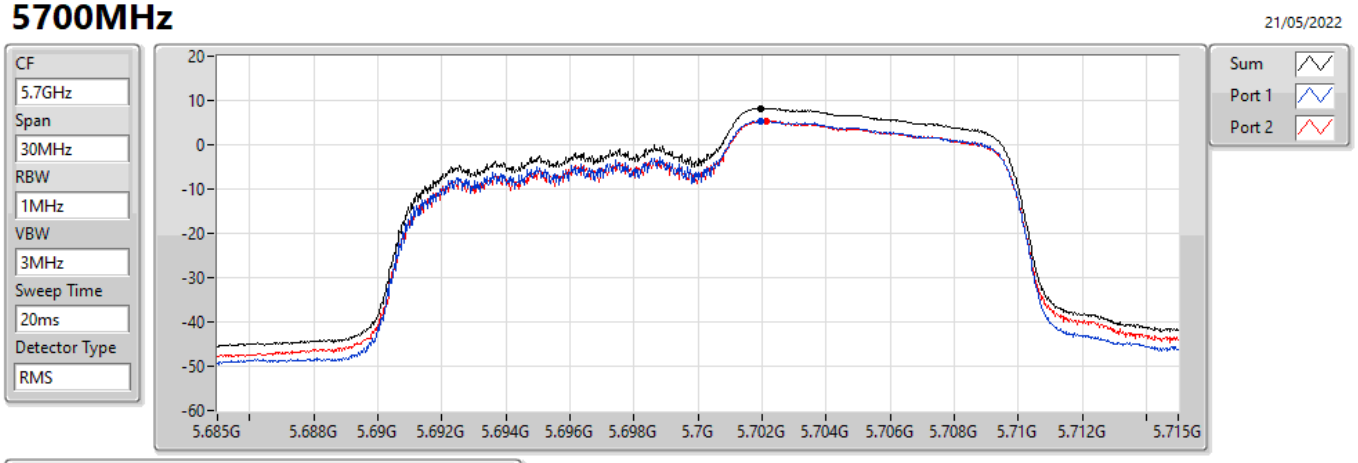

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.24	8.24	5.29	5.35

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.47-5.725GHz

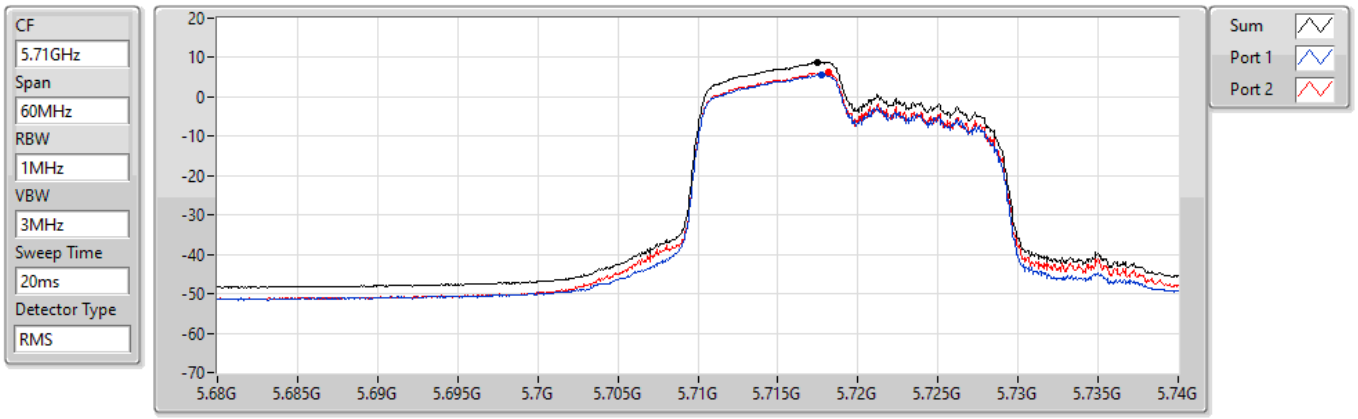

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.78	8.78	5.60	6.14

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.725-5.85GHz

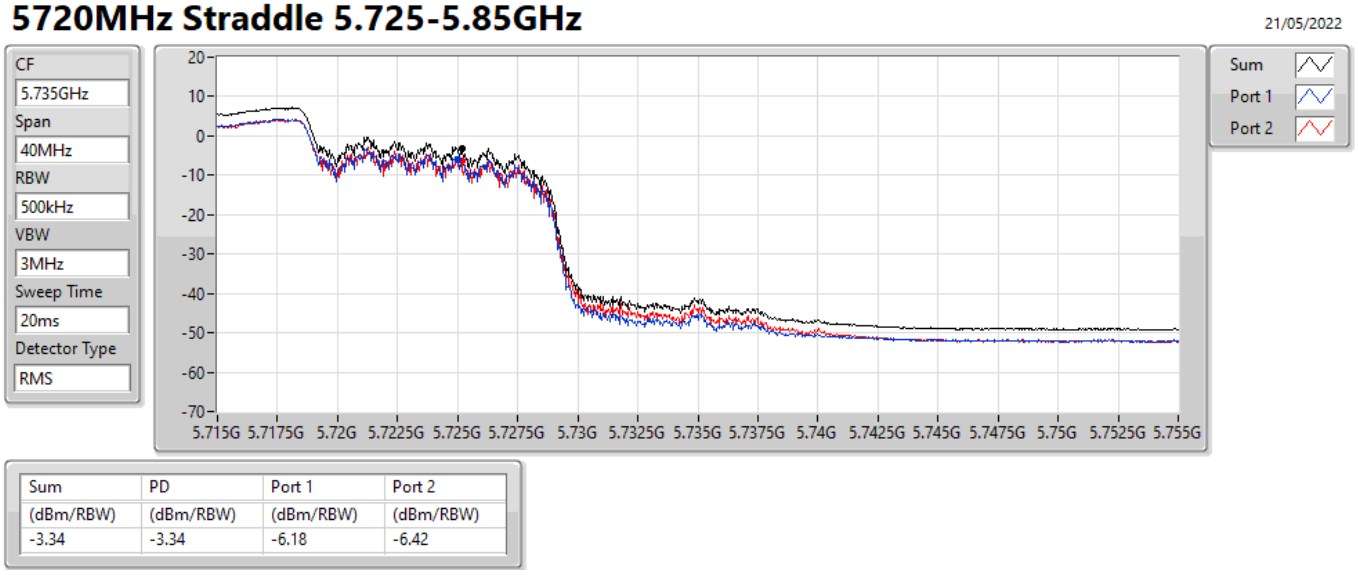

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.34	-3.34	-6.18	-6.42

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5745MHz

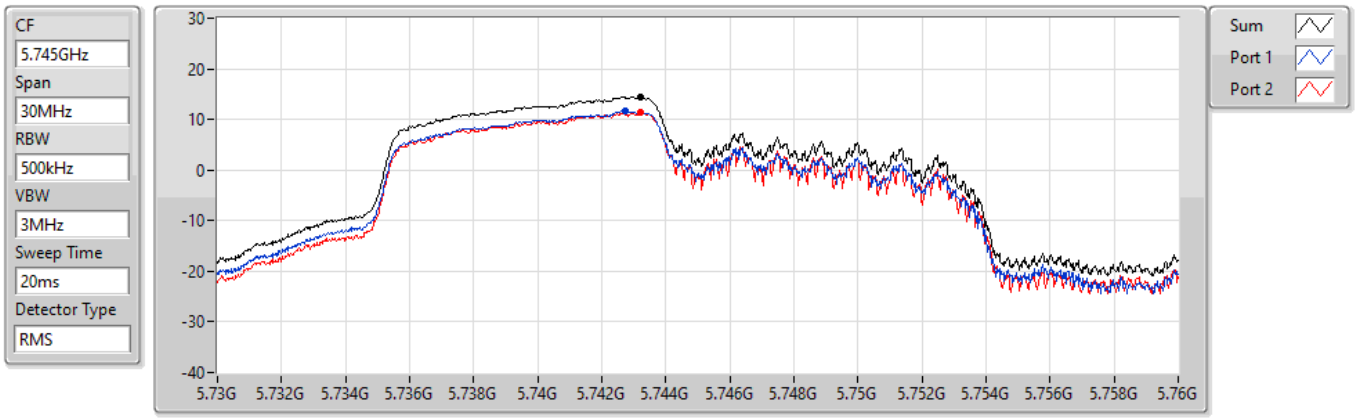

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.45	14.45	11.66	11.48

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5785MHz

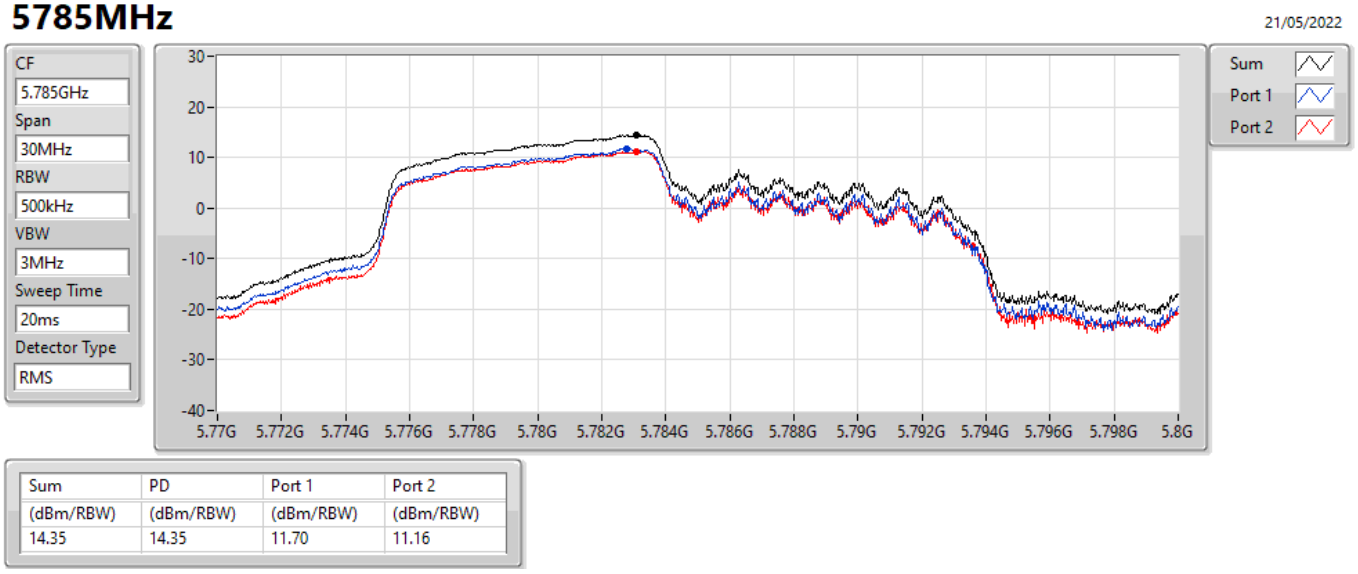

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.35	14.35	11.70	11.16

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5825MHz

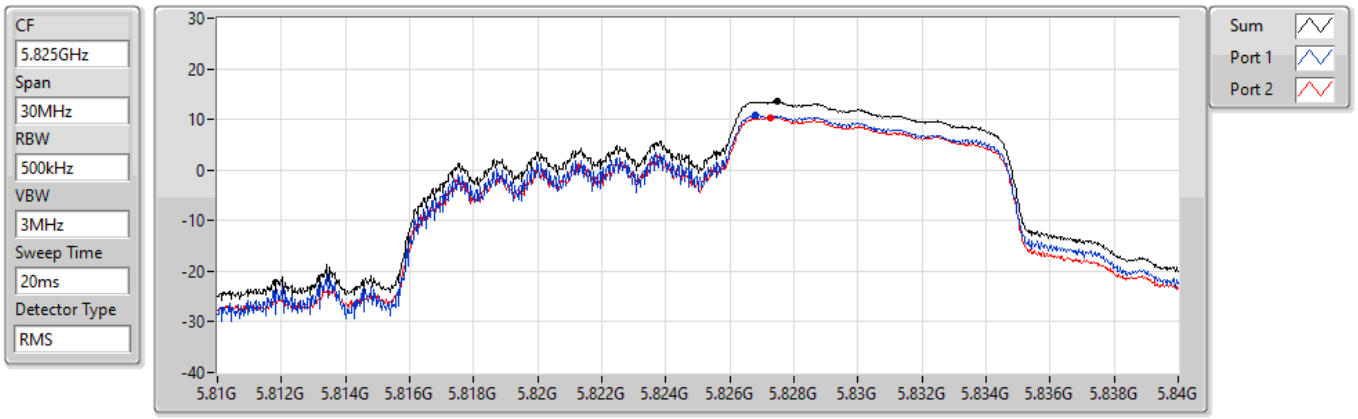

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.51	13.51	10.78	10.37

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.94
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.98
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.98
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	15.32

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	8.01	5.69	6.18	8.93	8.99
5200MHz	Pass	8.01	5.92	6.01	8.94	8.99
5240MHz	Pass	8.01	5.74	5.86	8.81	8.99
5260MHz	Pass	8.01	5.75	5.99	8.87	8.99
5300MHz	Pass	8.01	5.37	6.47	8.94	8.99
5320MHz	Pass	8.01	5.55	6.40	8.98	8.99
5500MHz	Pass	8.01	5.82	5.92	8.84	8.99
5580MHz	Pass	8.01	6.00	5.98	8.96	8.99
5700MHz	Pass	8.01	5.68	5.91	8.78	8.99
5720MHz Straddle 5.47-5.725GHz	Pass	8.01	5.93	6.03	8.98	8.99
5720MHz Straddle 5.725-5.85GHz	Pass	8.01	-17.79	-18.45	-16.57	27.99
5745MHz	Pass	8.01	12.04	12.63	15.32	27.99
5785MHz	Pass	8.01	11.07	11.31	14.17	27.99
5825MHz	Pass	8.01	10.70	11.19	13.94	27.99

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5180MHz

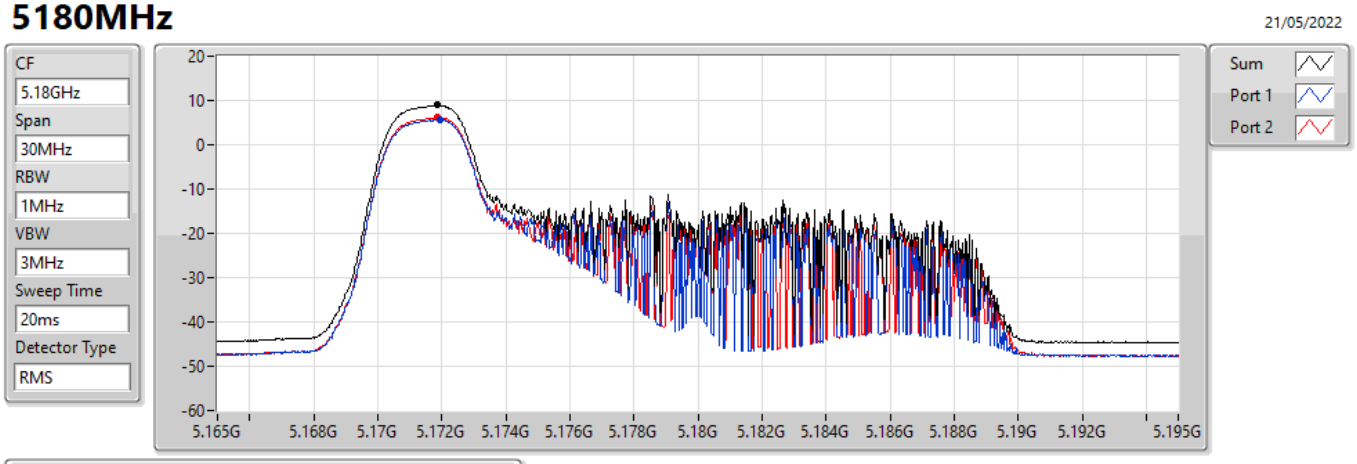

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.93	8.93	5.69	6.18

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5200MHz

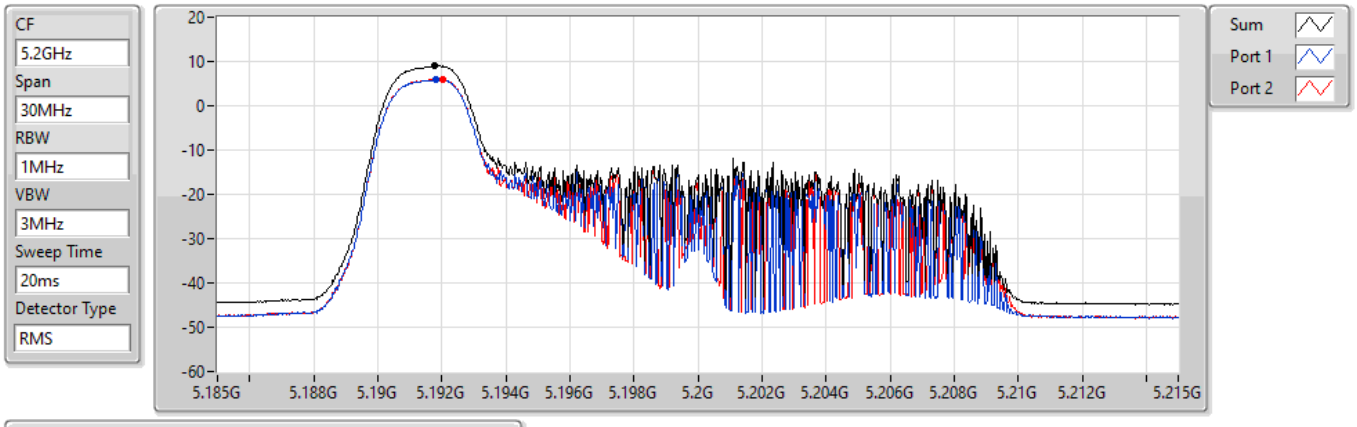

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.94	8.94	5.92	6.01

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5240MHz

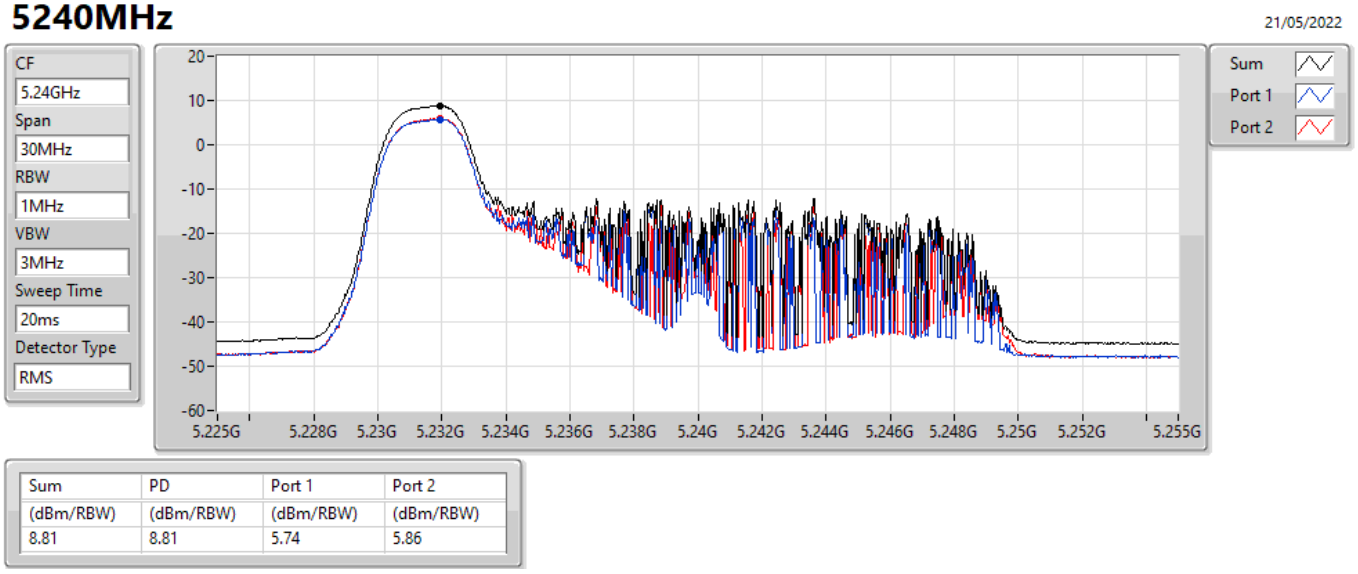

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.81	8.81	5.74	5.86

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5260MHz

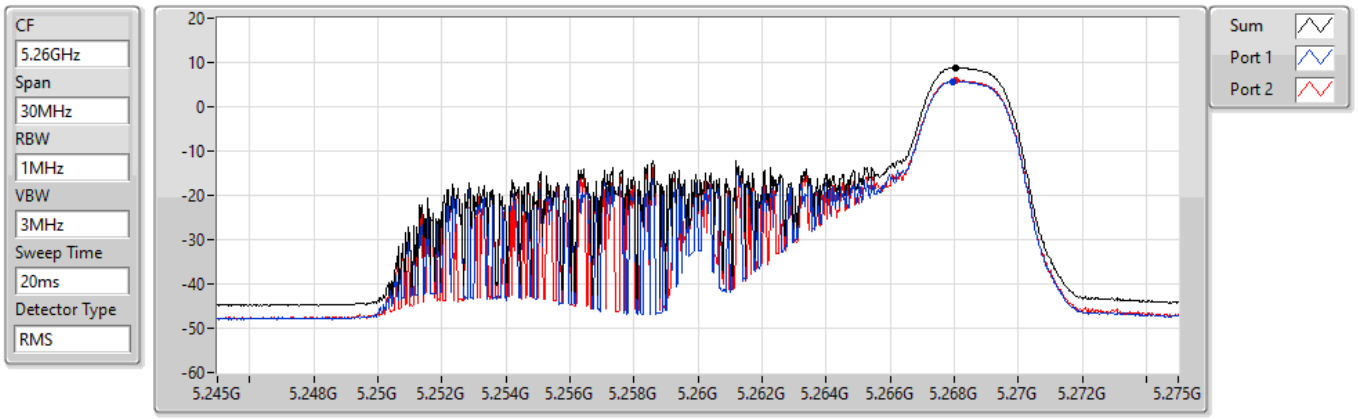

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.87	8.87	5.75	5.99

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5300MHz

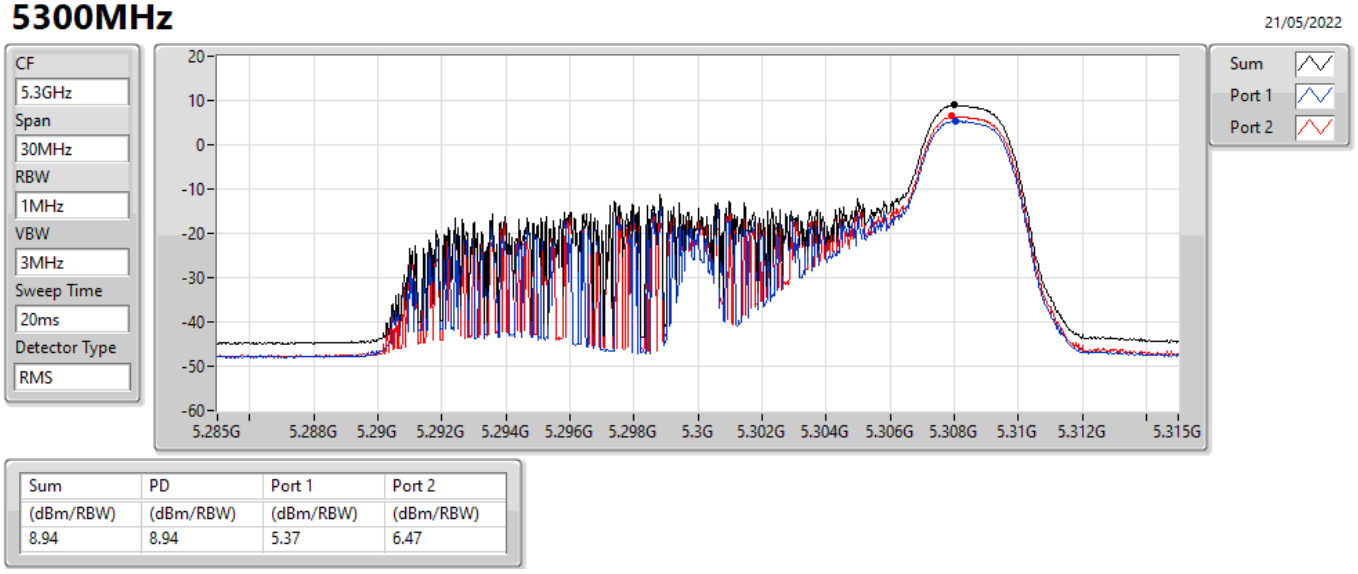

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.94	8.94	5.37	6.47

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5320MHz

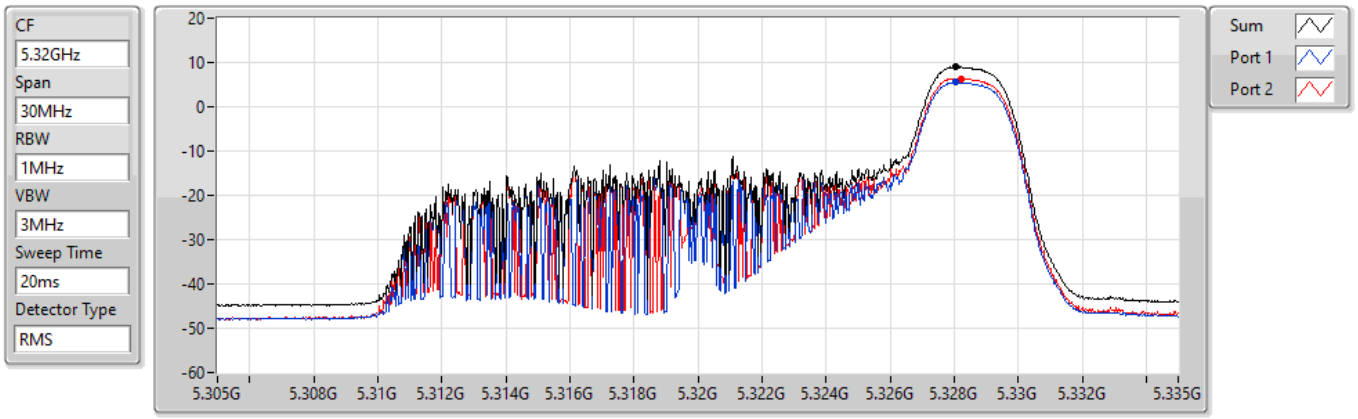

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.98	8.98	5.55	6.40

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5500MHz

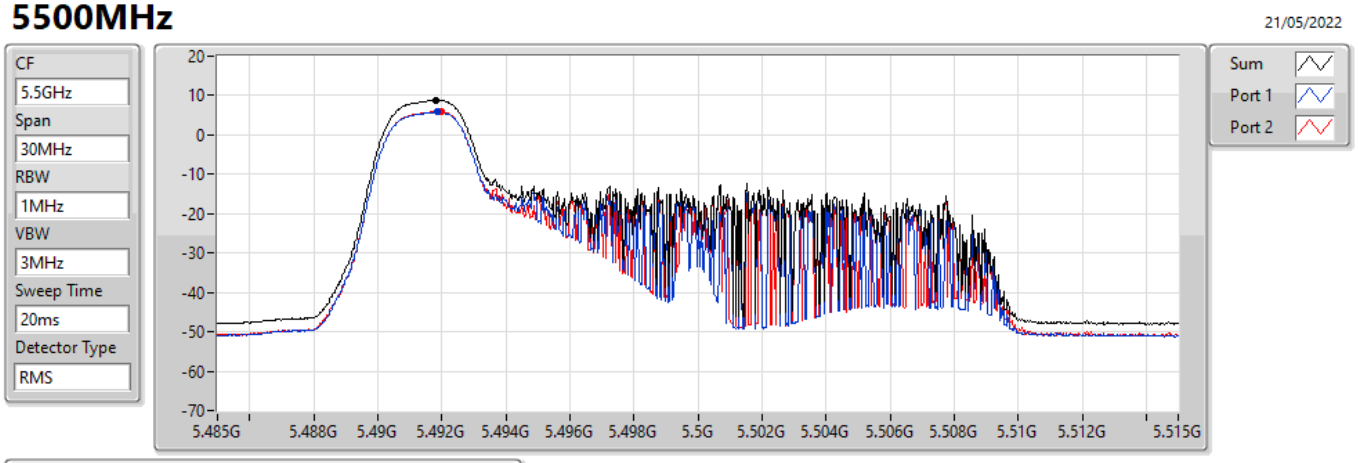

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.84	8.84	5.82	5.92

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5580MHz

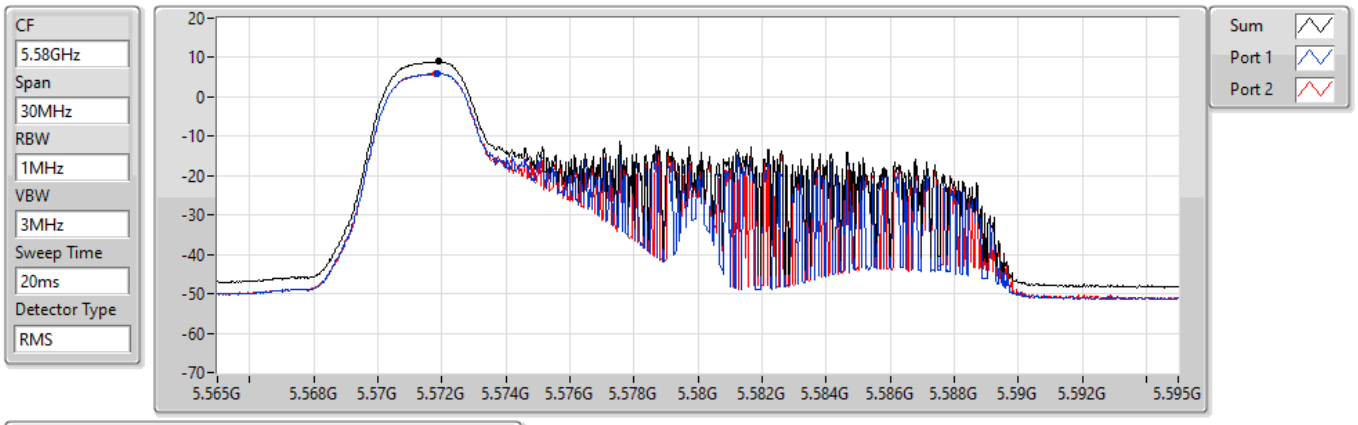

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.96	8.96	6.00	5.98

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5700MHz

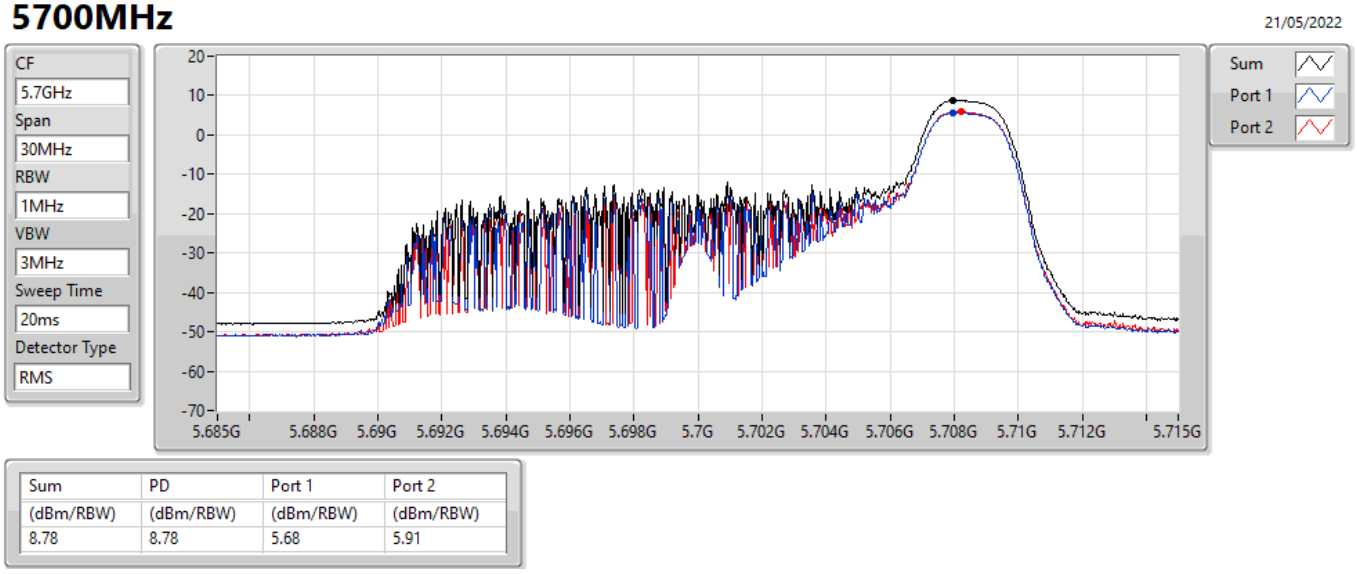

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.78	8.78	5.68	5.91

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.47-5.725GHz

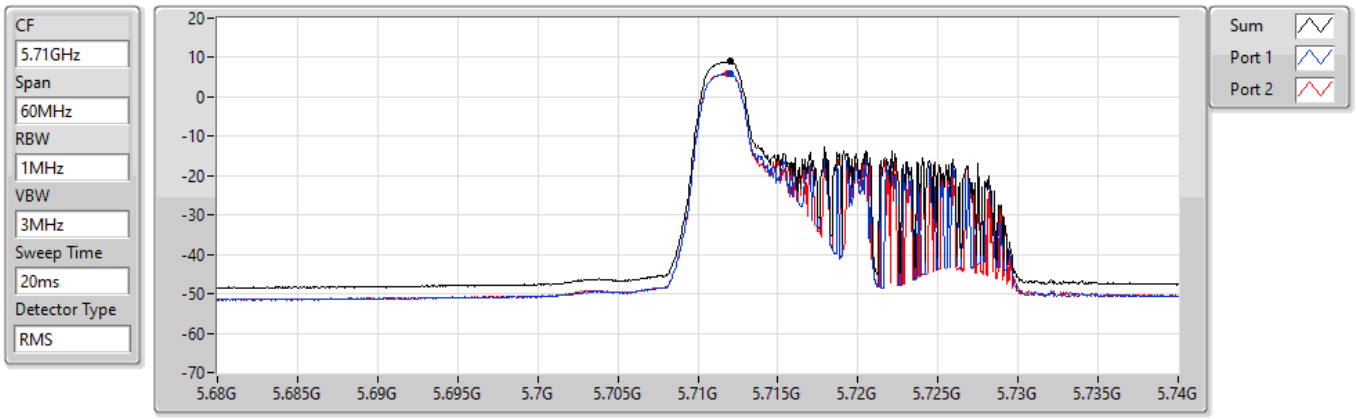

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.98	8.98	5.93	6.03

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.725-5.85GHz

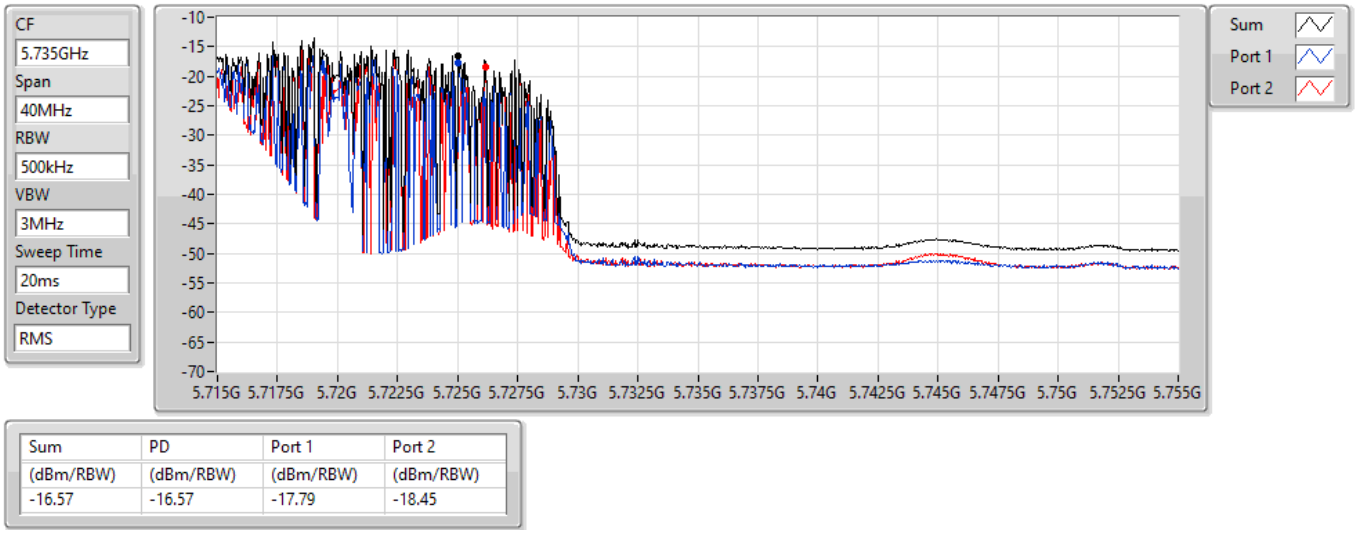

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-16.57	-16.57	-17.79	-18.45

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5745MHz

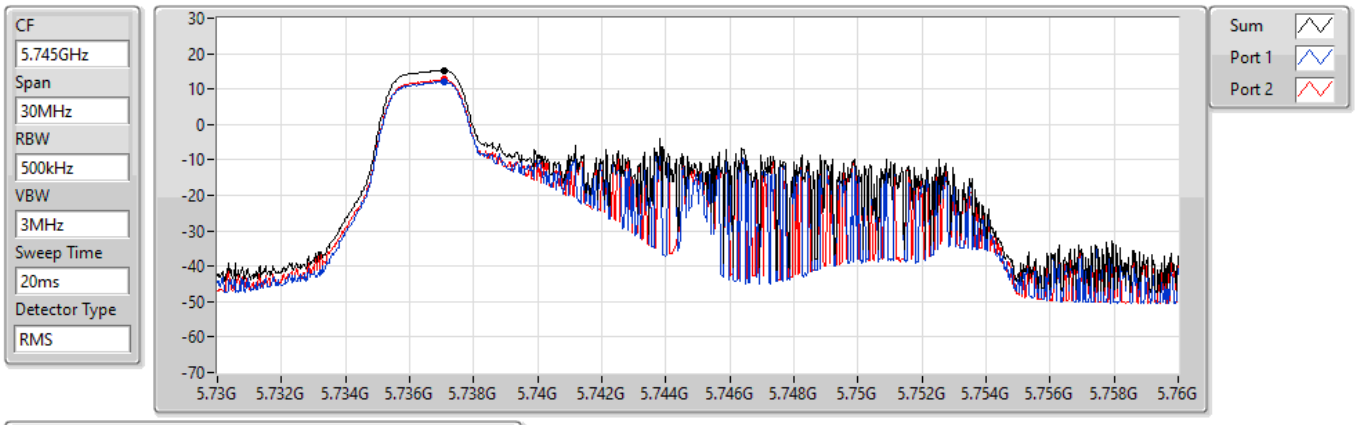

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.32	15.32	12.04	12.63

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5785MHz

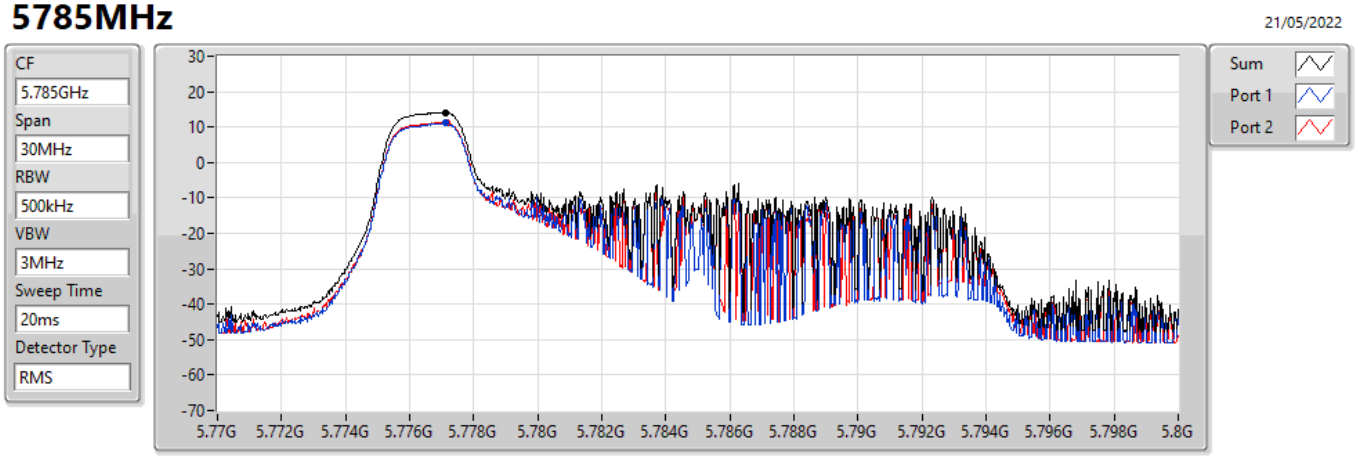

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.17	14.17	11.07	11.31

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5825MHz

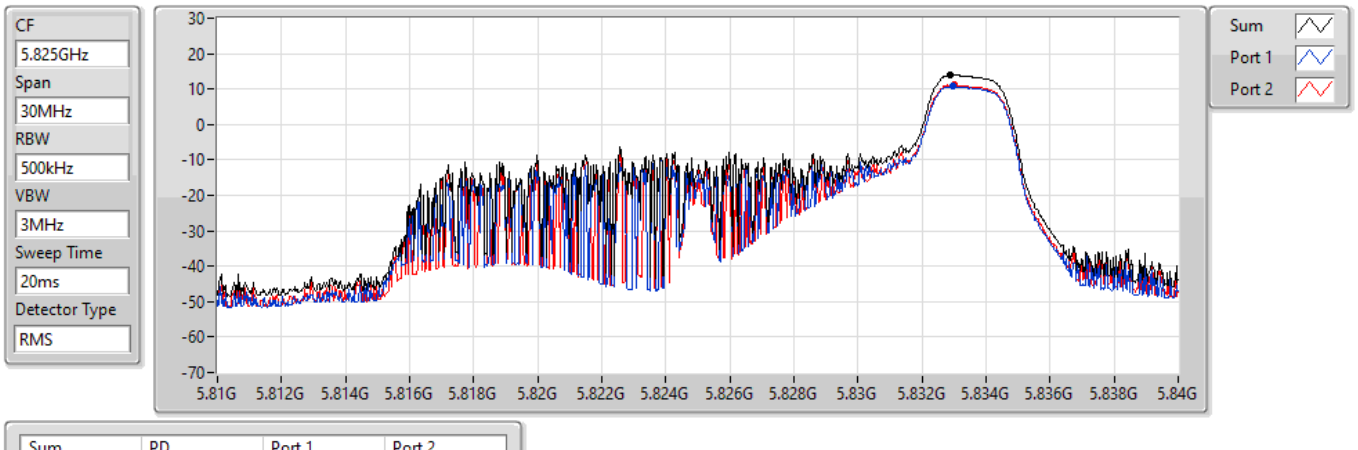

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.94	13.94	10.70	11.19

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.98
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.93
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.98
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	15.31

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	8.01	5.53	6.29	8.90	8.99
5200MHz	Pass	8.01	5.93	6.00	8.94	8.99
5240MHz	Pass	8.01	5.98	6.13	8.98	8.99
5260MHz	Pass	8.01	5.73	6.13	8.88	8.99
5300MHz	Pass	8.01	6.10	6.06	8.93	8.99
5320MHz	Pass	8.01	5.76	5.97	8.84	8.99
5500MHz	Pass	8.01	5.87	6.28	8.98	8.99
5580MHz	Pass	8.01	5.64	5.90	8.77	8.99
5700MHz	Pass	8.01	4.70	4.88	7.80	8.99
5720MHz Straddle 5.47-5.725GHz	Pass	8.01	5.52	6.44	8.93	8.99
5720MHz Straddle 5.725-5.85GHz	Pass	8.01	-6.04	-6.20	-3.76	27.99
5745MHz	Pass	8.01	12.06	12.63	15.20	27.99
5785MHz	Pass	8.01	12.17	12.61	15.31	27.99
5825MHz	Pass	8.01	12.23	11.30	14.79	27.99

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5180MHz

21/05/2022

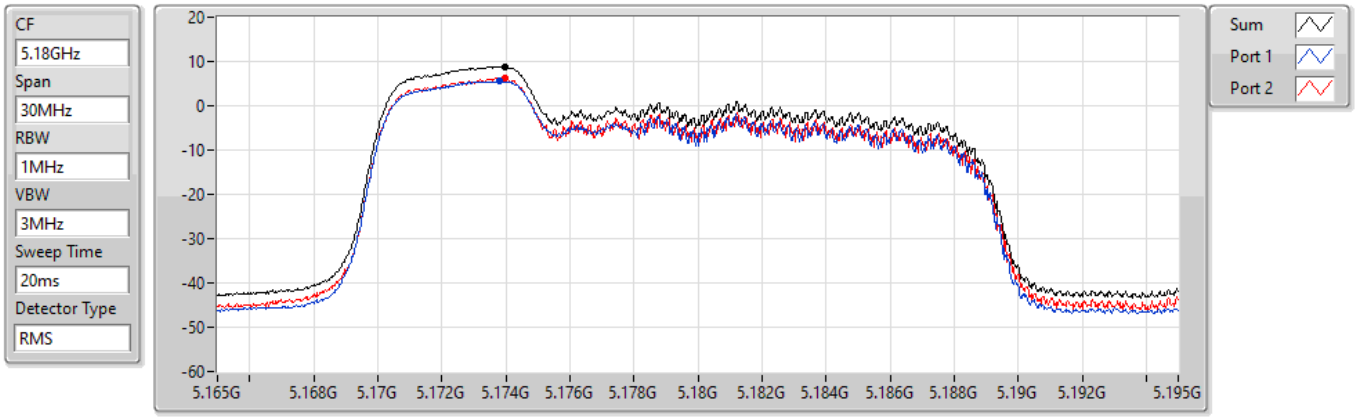


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.90	8.90	5.53	6.29

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5200MHz


21/05/2022

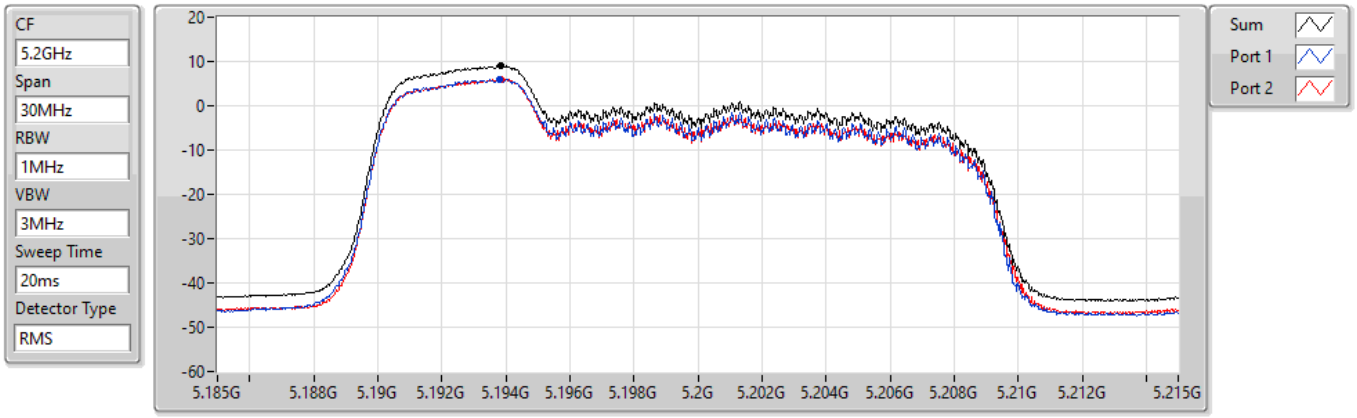

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.94	8.94	5.93	6.00

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5240MHz

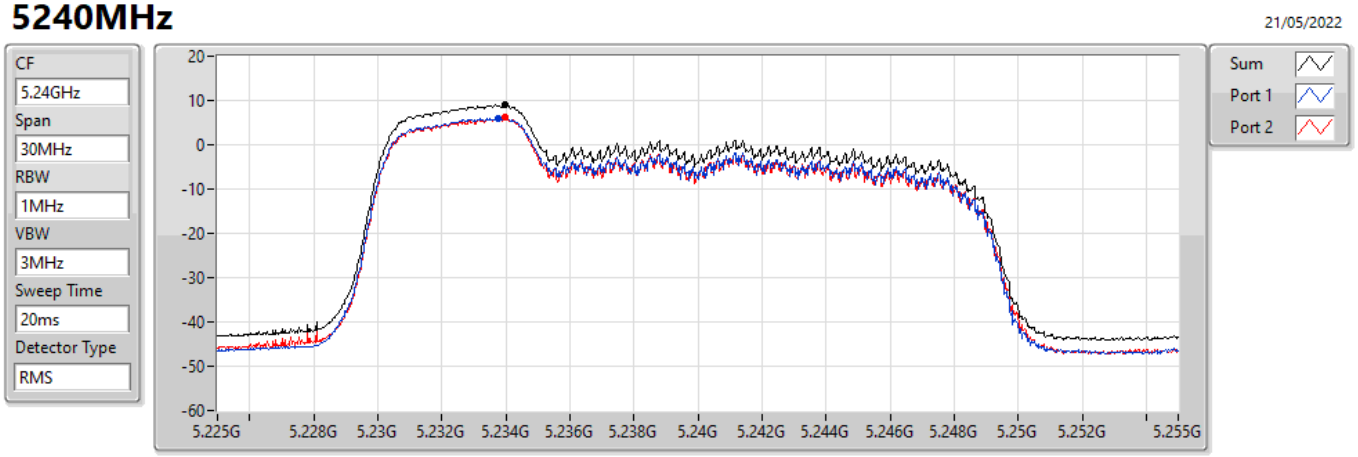

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.98	8.98	5.98	6.13

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5260MHz

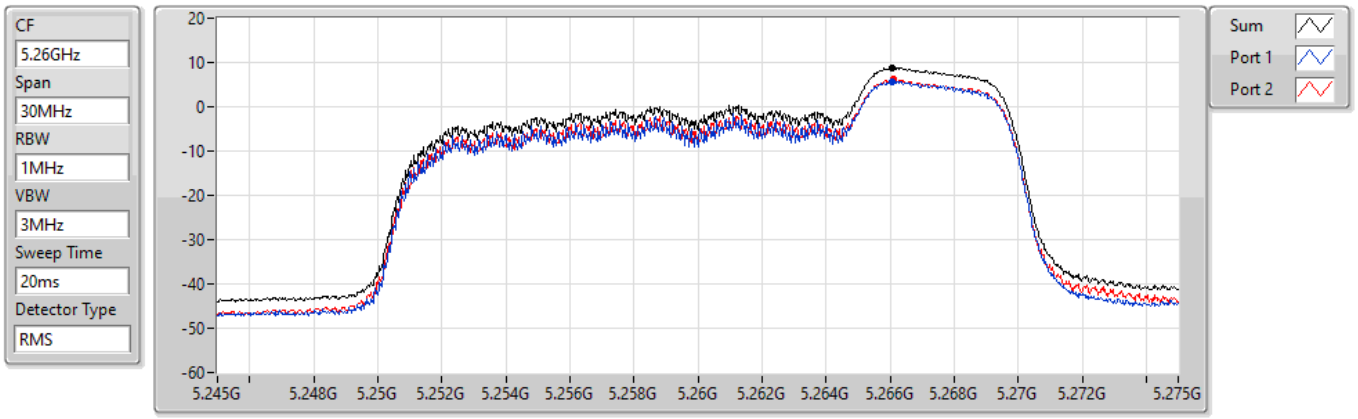

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.88	8.88	5.73	6.13

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5300MHz

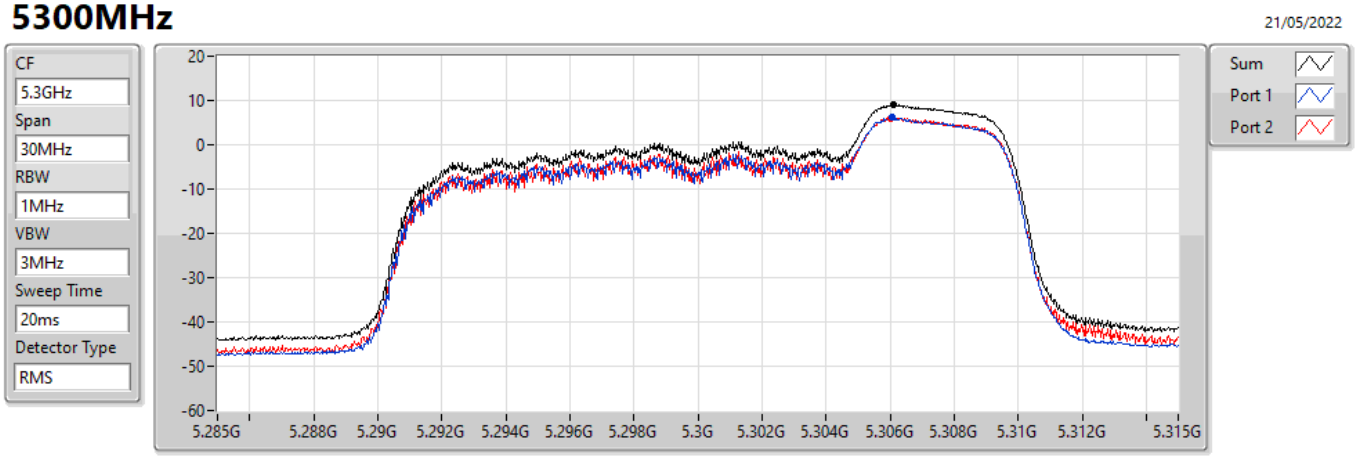

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.93	8.93	6.10	6.06

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5320MHz

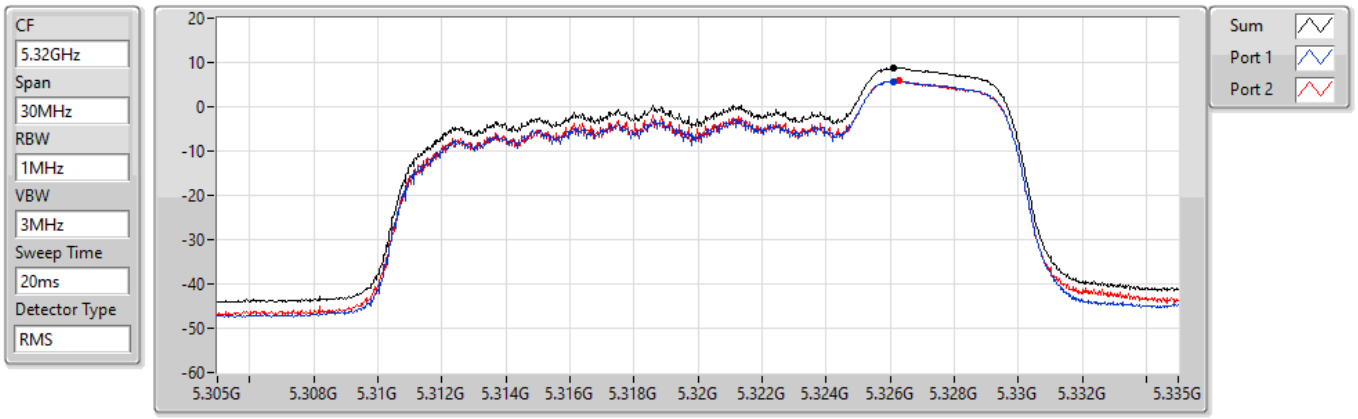

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.84	8.84	5.76	5.97

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5500MHz

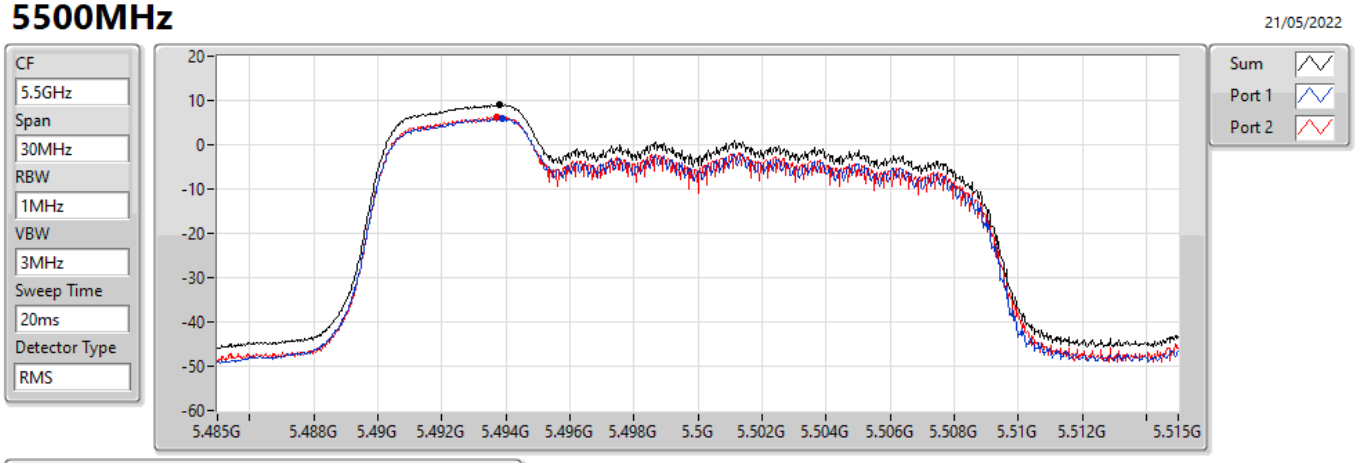

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.98	8.98	5.87	6.28

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5580MHz

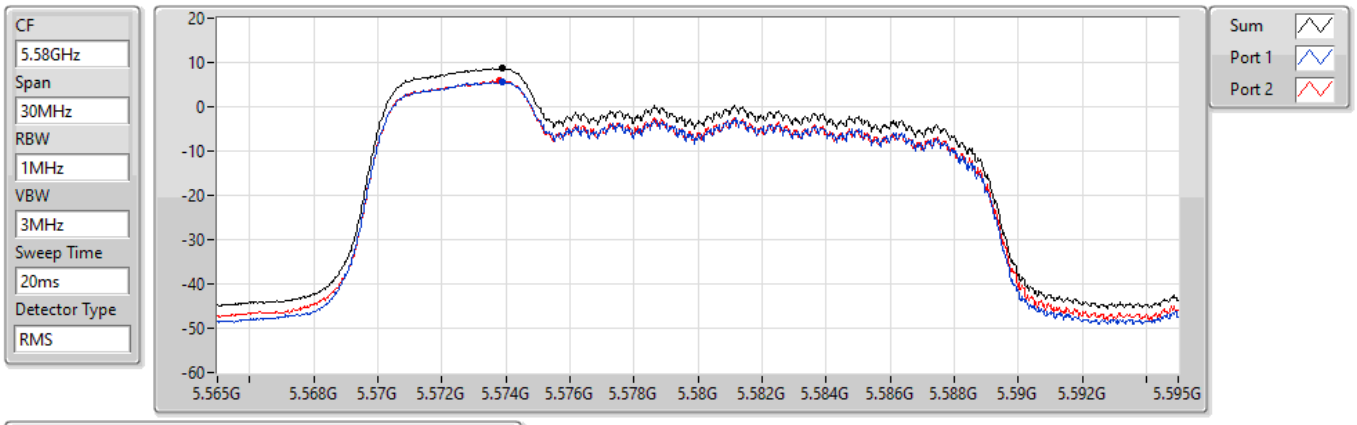

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.77	8.77	5.64	5.90

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5700MHz

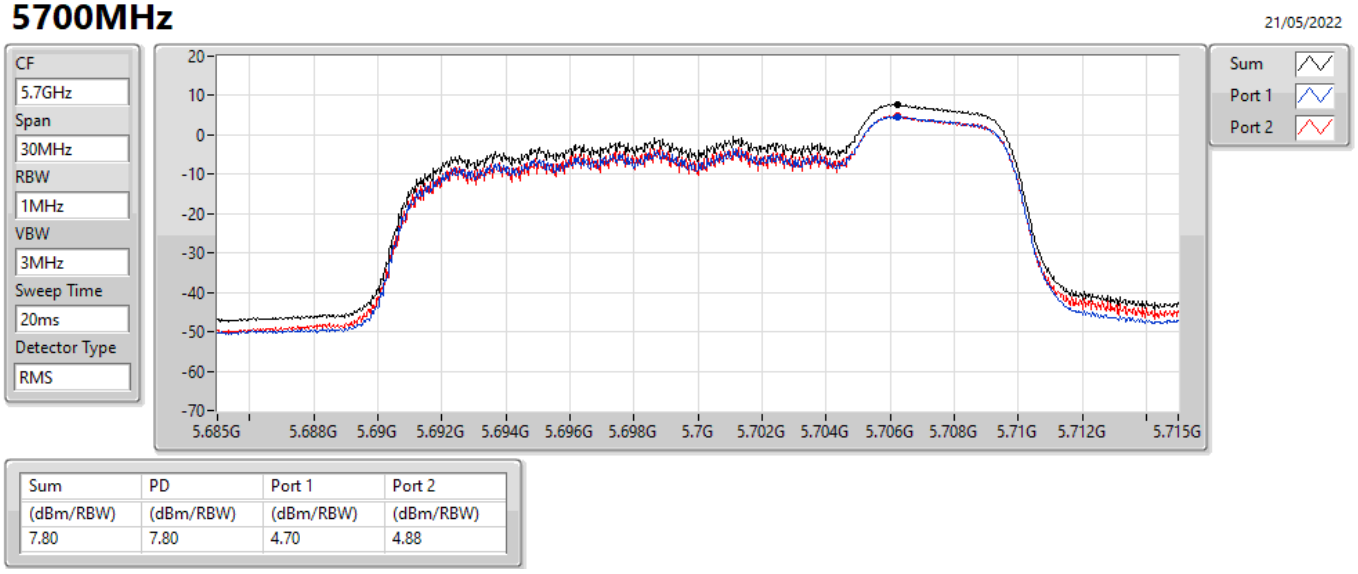

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.80	7.80	4.70	4.88

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.47-5.725GHz

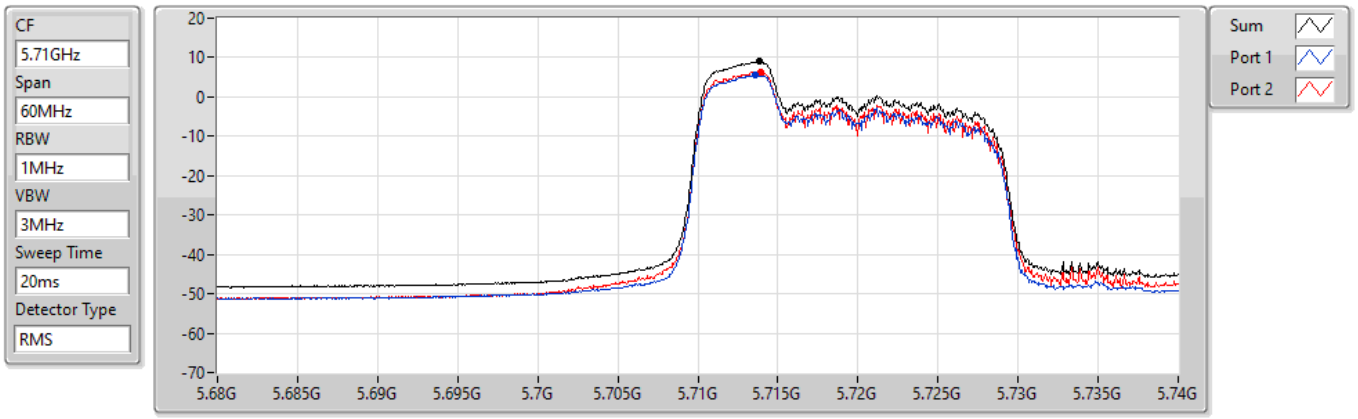

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.93	8.93	5.52	6.44

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.725-5.85GHz

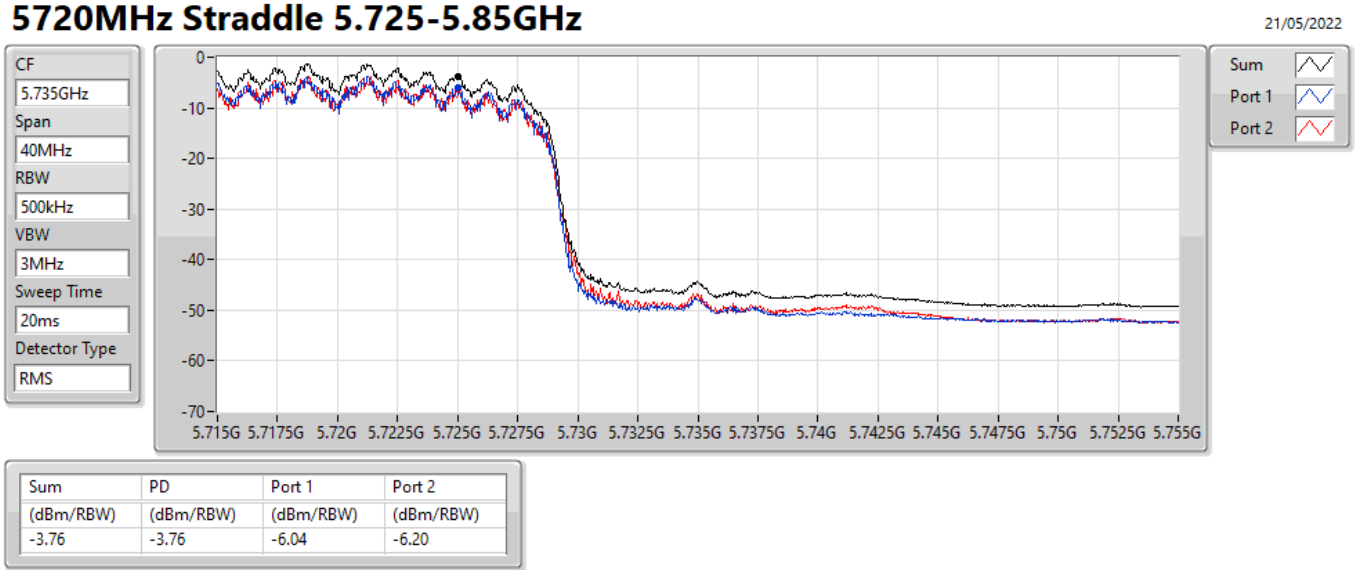

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.76	-3.76	-6.04	-6.20

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5745MHz

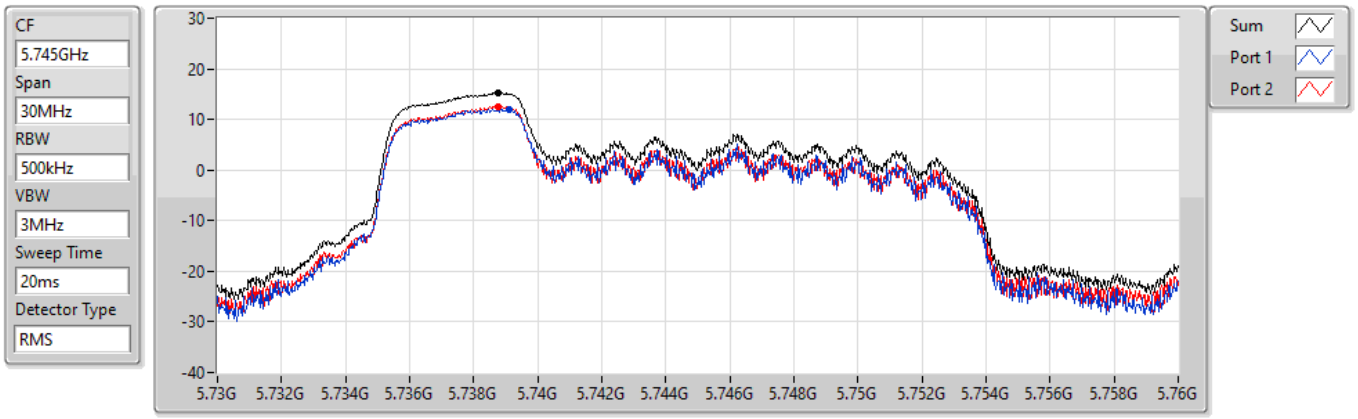

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.20	15.20	12.06	12.63

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5785MHz

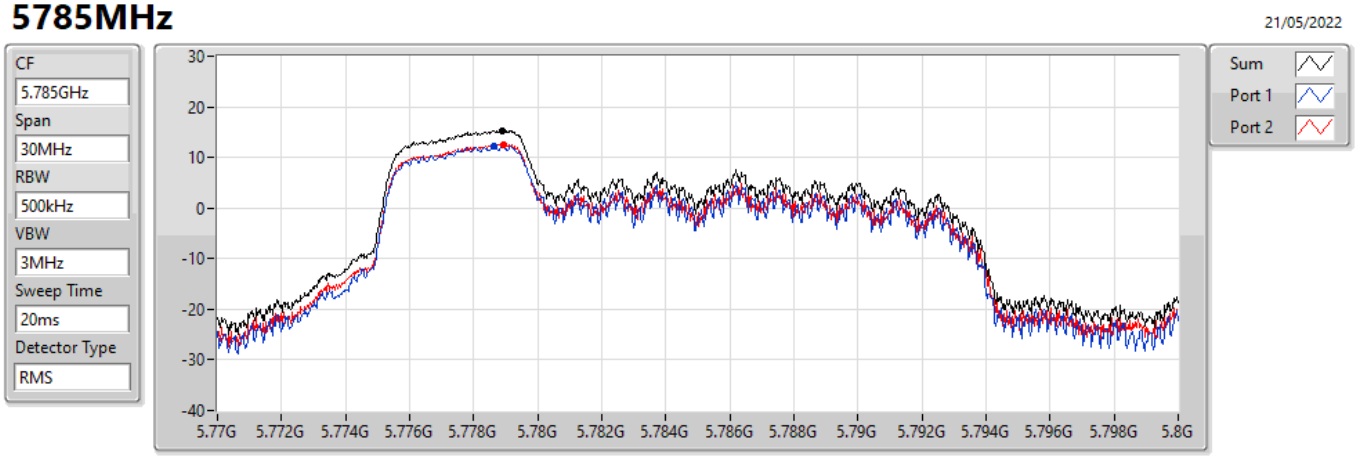

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
15.31	15.31	12.17	12.61

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5825MHz

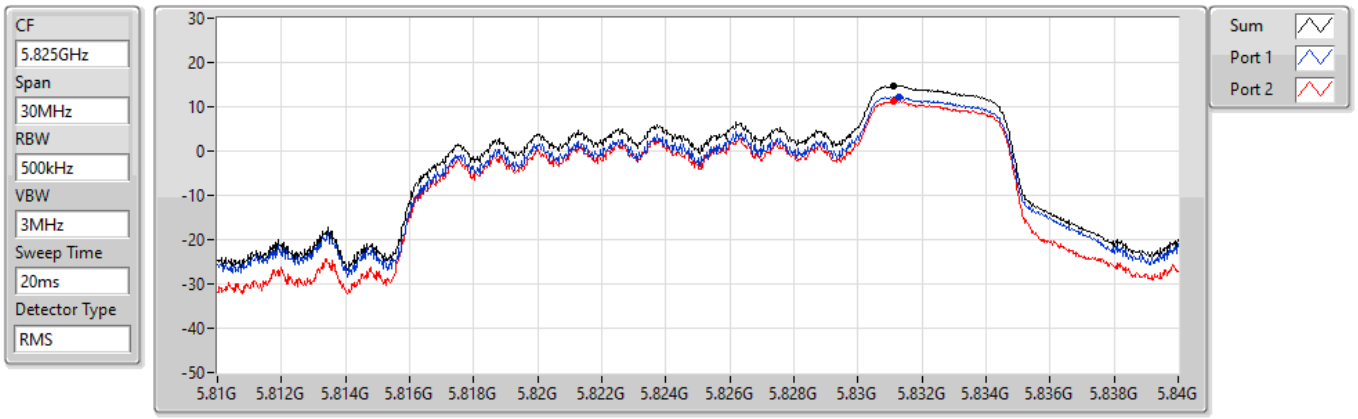

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.79	14.79	12.23	11.30

Summary

Mode	PD (dBm/RBW)
5.15-5.25GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.92
5.25-5.35GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.87
5.47-5.725GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	8.98
5.725-5.85GHz	-
802.11ax HEW20_Nss1,(MCS0)_2TX	14.45

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;


Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5180MHz	Pass	8.01	5.93	5.89	8.92	8.99
5200MHz	Pass	8.01	5.79	6.03	8.90	8.99
5240MHz	Pass	8.01	5.98	5.88	8.89	8.99
5260MHz	Pass	8.01	5.63	6.16	8.87	8.99
5300MHz	Pass	8.01	5.62	6.10	8.80	8.99
5320MHz	Pass	8.01	5.57	6.03	8.79	8.99
5500MHz	Pass	8.01	5.80	6.21	8.96	8.99
5580MHz	Pass	8.01	5.77	6.27	8.98	8.99
5700MHz	Pass	8.01	5.29	5.35	8.24	8.99
5720MHz Straddle 5.47-5.725GHz	Pass	8.01	5.60	6.14	8.78	8.99
5720MHz Straddle 5.725-5.85GHz	Pass	8.01	-6.18	-6.42	-3.34	27.99
5745MHz	Pass	8.01	11.66	11.48	14.45	27.99
5785MHz	Pass	8.01	11.70	11.16	14.35	27.99
5825MHz	Pass	8.01	10.78	10.37	13.51	27.99

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5180MHz

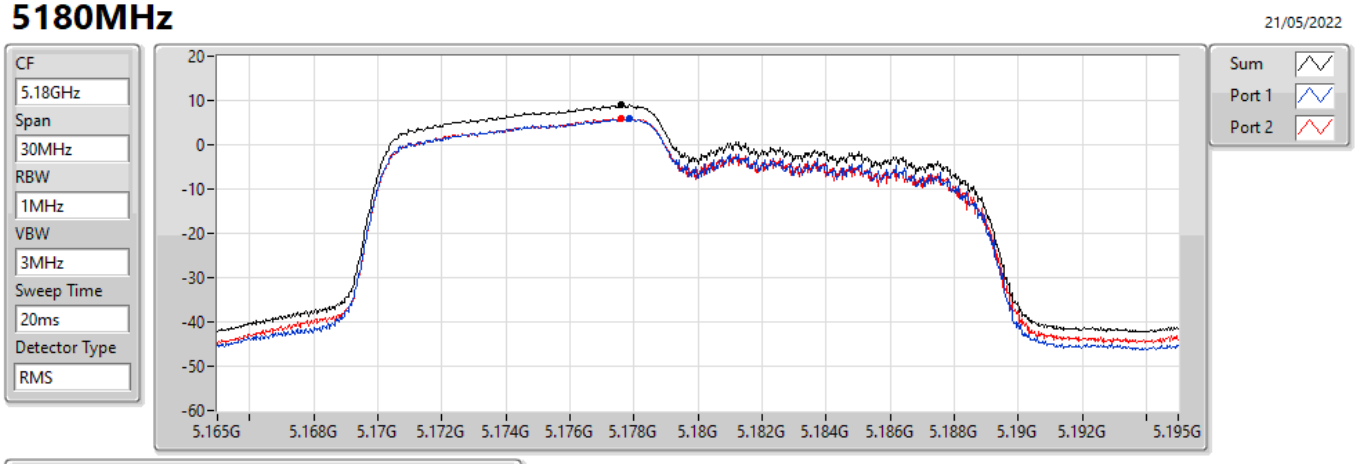

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.92	8.92	5.93	5.89

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5200MHz

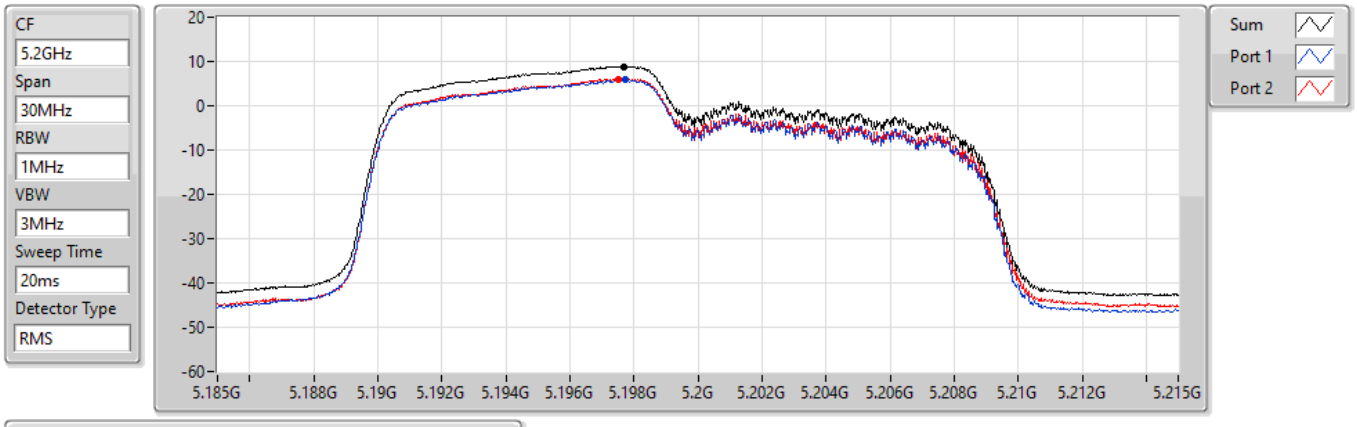

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.90	8.90	5.79	6.03

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5240MHz

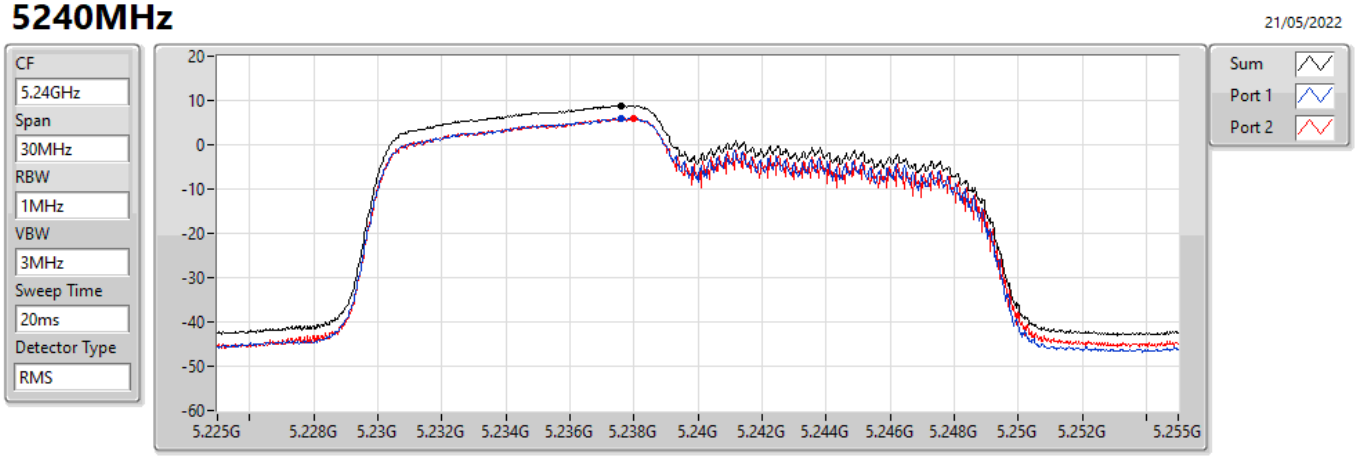

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.89	8.89	5.98	5.88

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5260MHz

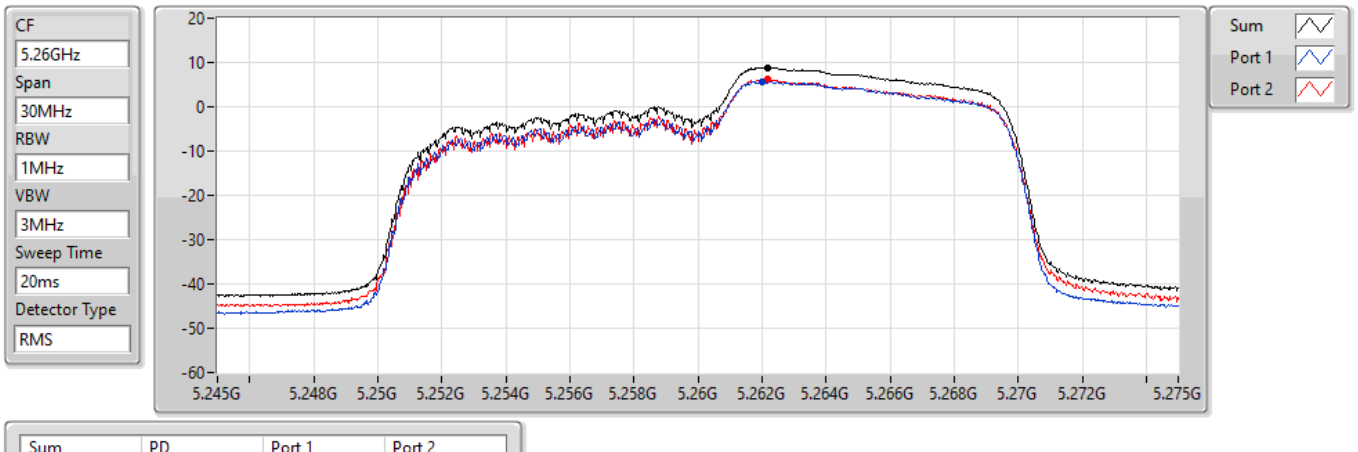

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.87	8.87	5.63	6.16

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5300MHz

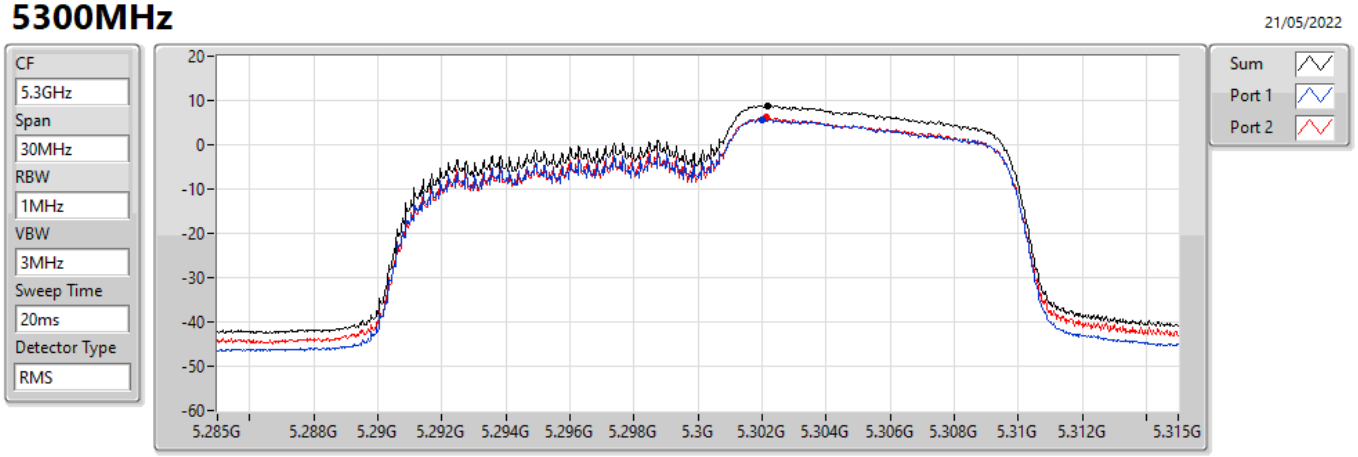

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.80	8.80	5.62	6.10

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5320MHz

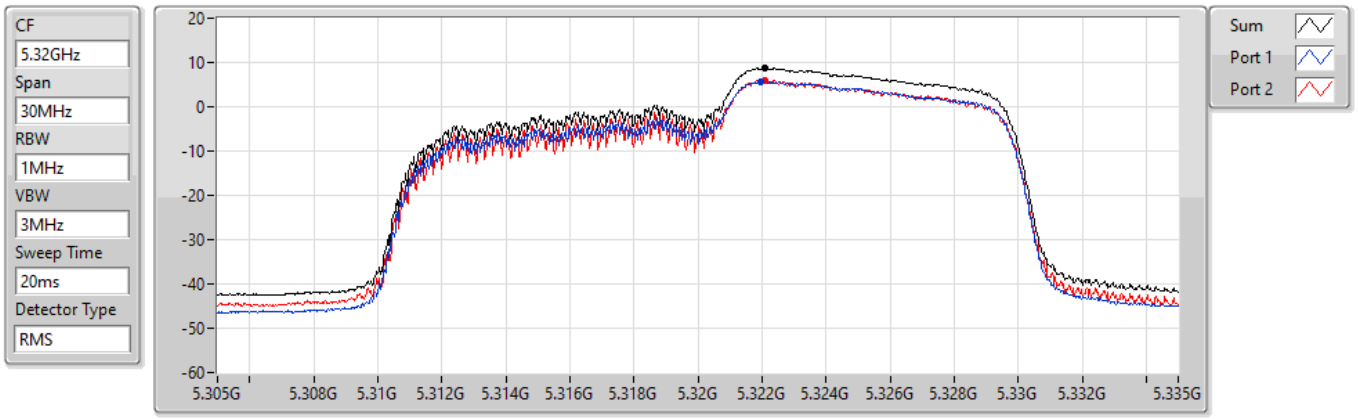

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.79	8.79	5.57	6.03

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5500MHz

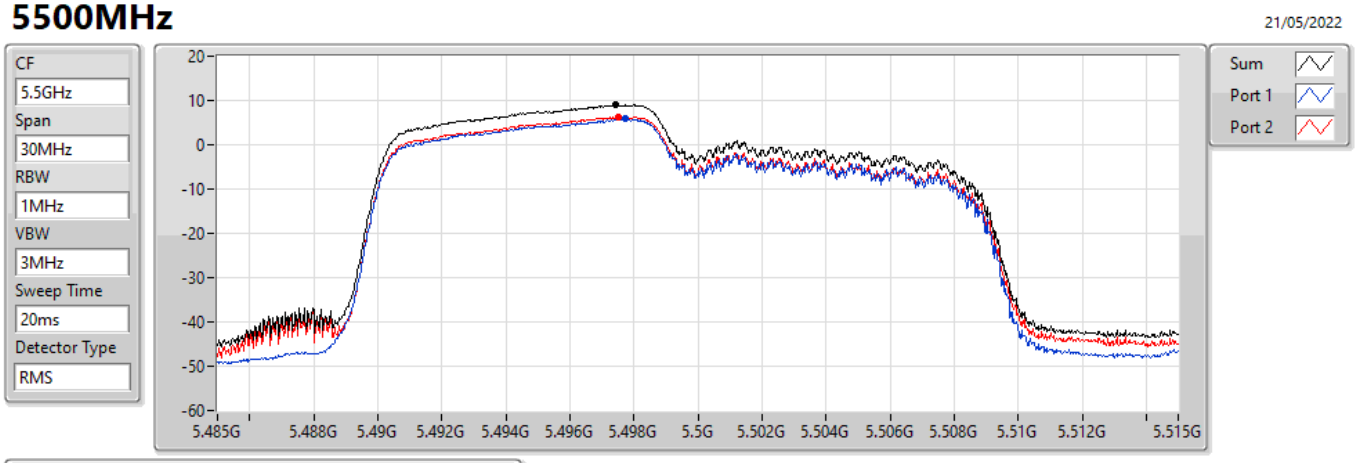

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.96	8.96	5.80	6.21

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5580MHz

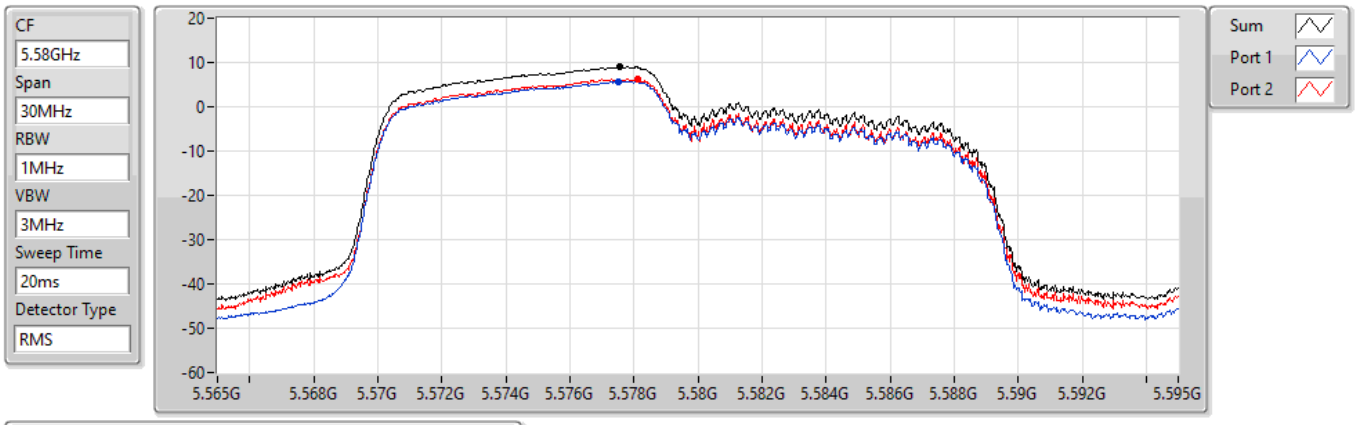

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.98	8.98	5.77	6.27

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5700MHz

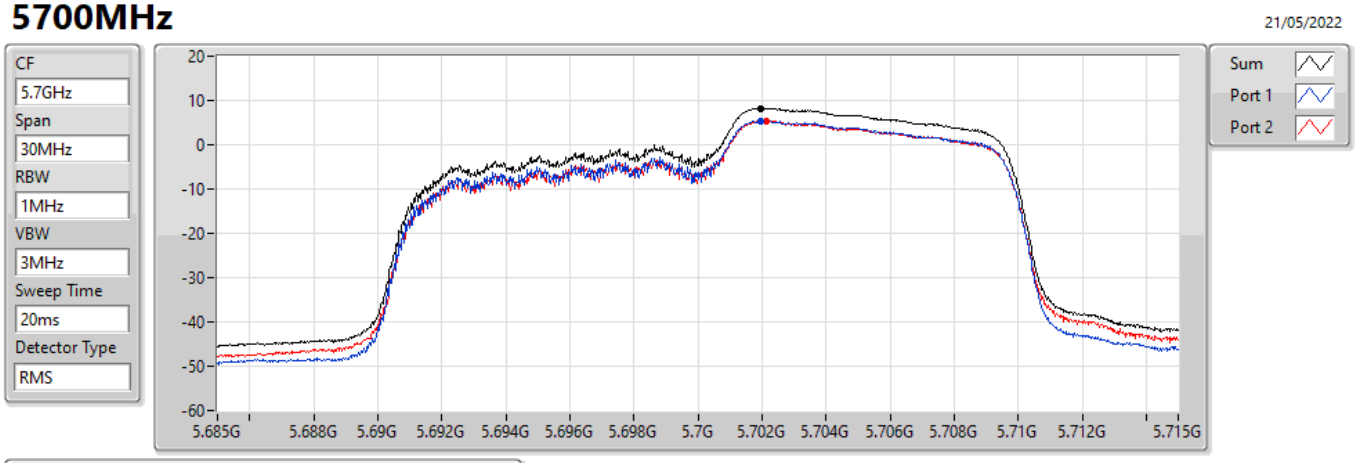

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.24	8.24	5.29	5.35

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.47-5.725GHz

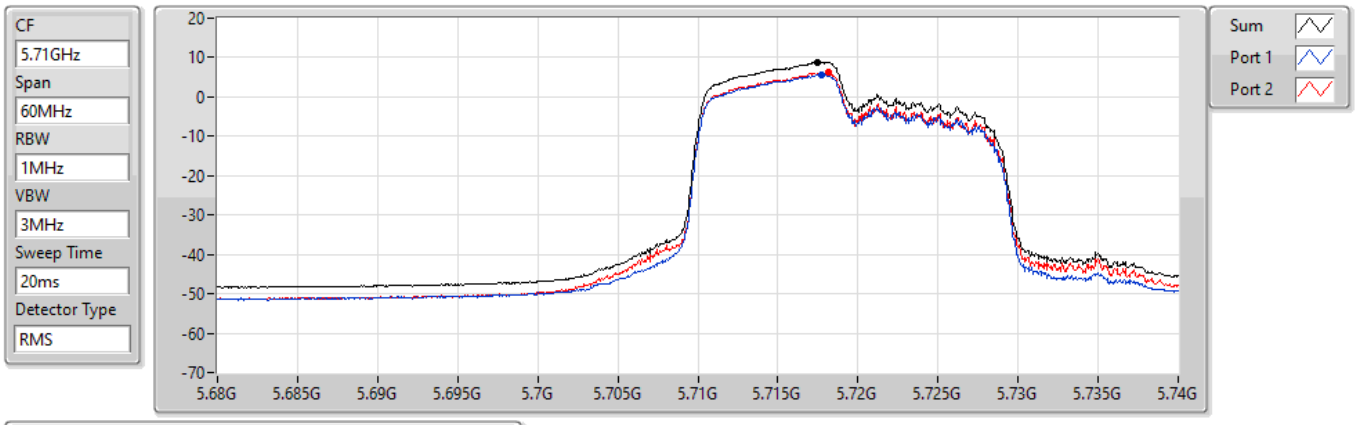

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.78	8.78	5.60	6.14

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5720MHz Straddle 5.725-5.85GHz

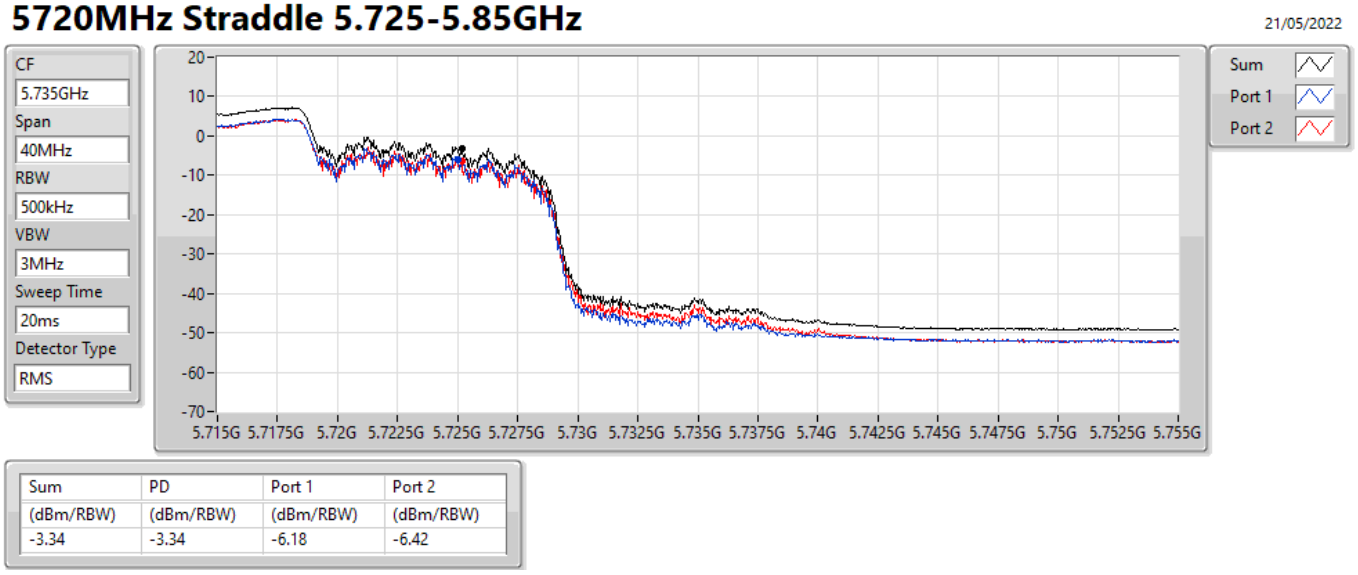

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-3.34	-3.34	-6.18	-6.42

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5745MHz

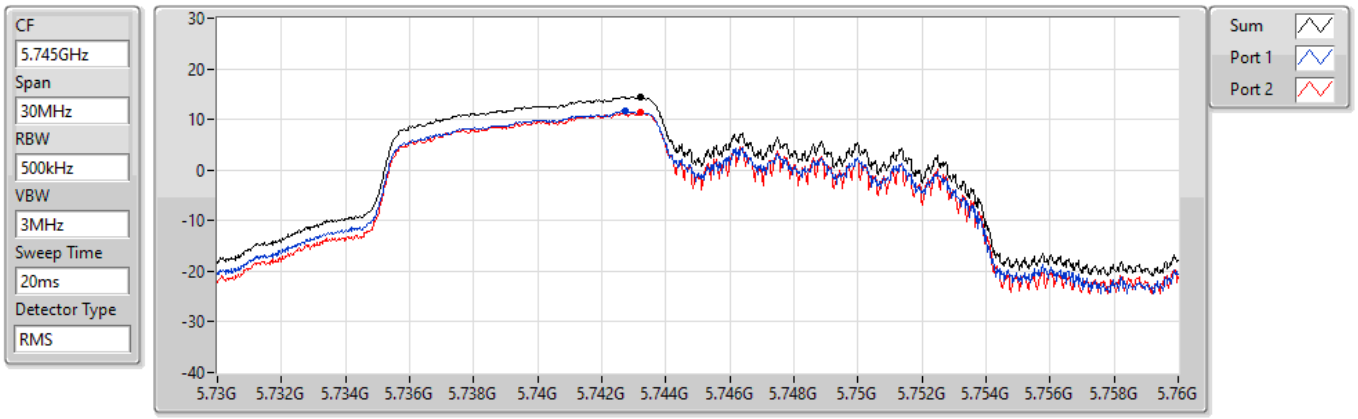

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.45	14.45	11.66	11.48

802.11ax HEW20_Nss1,(MCS0)_2TX PSD


5785MHz

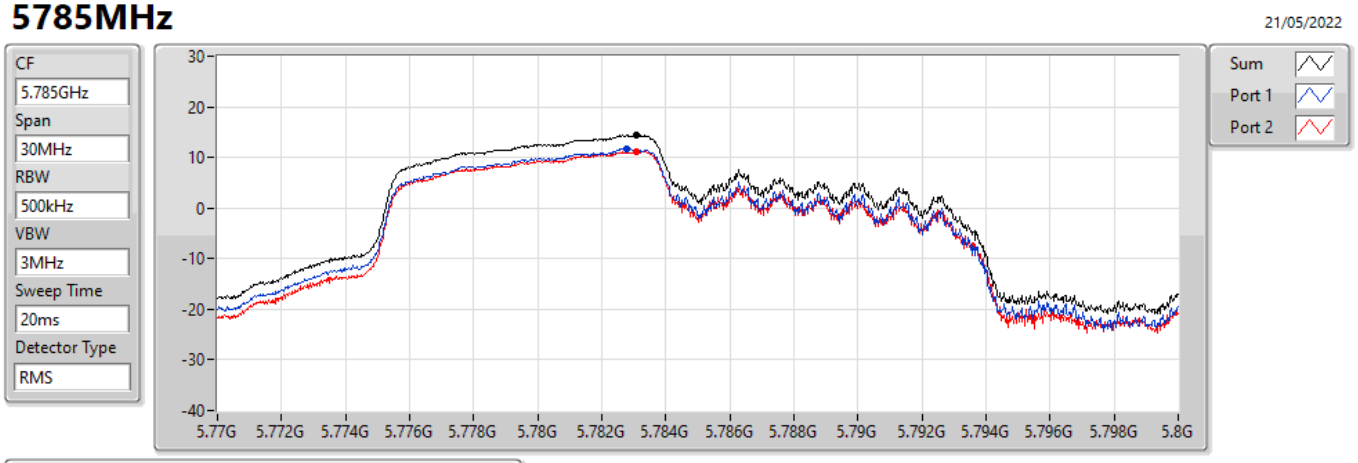

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
14.35	14.35	11.70	11.16

802.11ax HEW20_Nss1,(MCS0)_2TX PSD

5825MHz

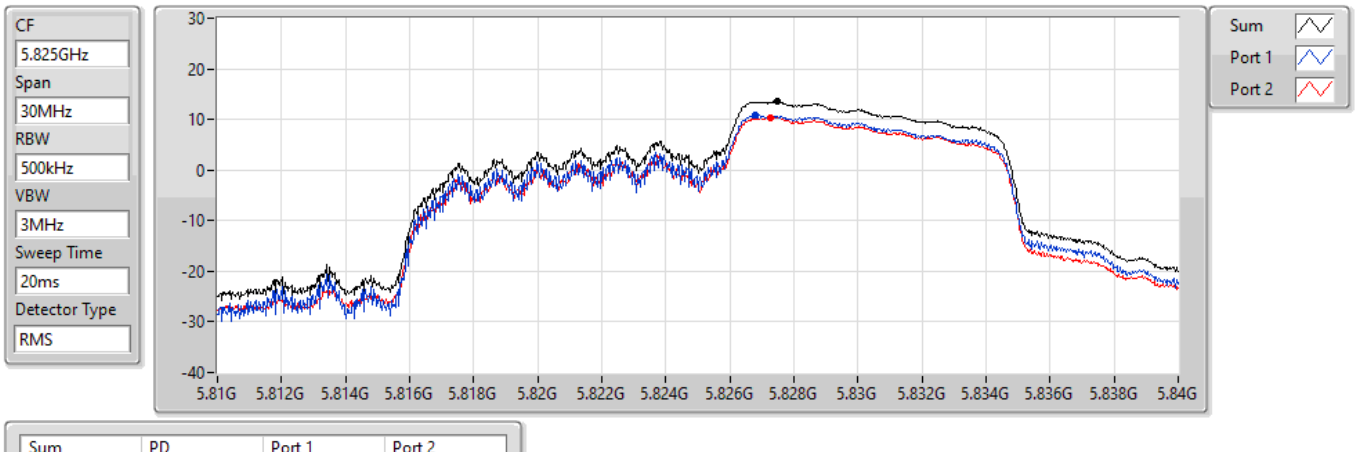


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
13.51	13.51	10.78	10.37

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 3	Pass	PK	60.01M	35.92	40.00	-4.08	Vertical

Mode 3


18/05/2022

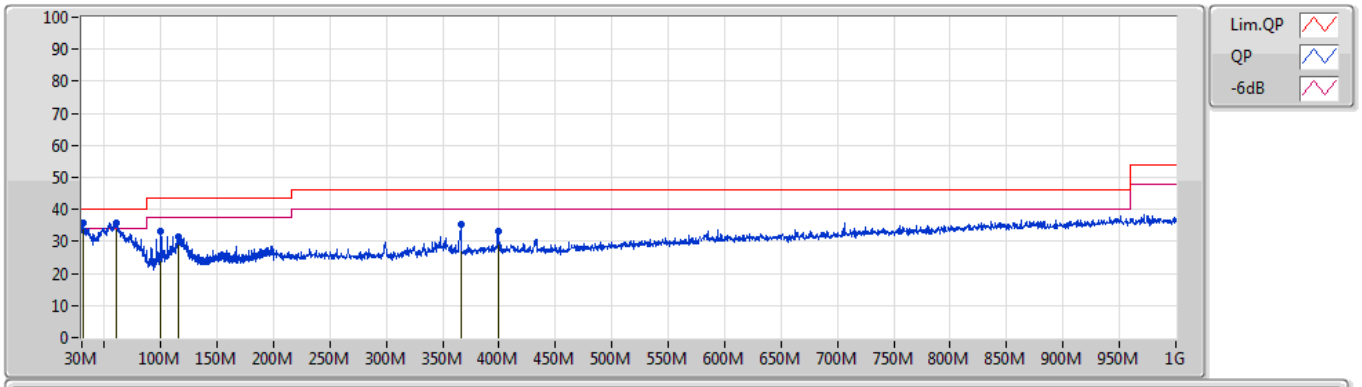

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	30.85M	35.61	40.00	-4.39	-13.16	3	Vertical	55	1.00	-	48.77	14.00	0.73	27.89
PK	60.01M	35.92	40.00	-4.08	-16.67	3	Vertical	193	1.00	"Worst"	52.59	9.80	1.30	27.77
PK	99.62M	33.36	43.50	-10.14	-16.35	3	Vertical	79	1.00	-	49.71	9.56	1.90	27.81
PK	115.6M	31.39	43.50	-12.11	-15.05	3	Vertical	190	2.00	-	46.44	10.50	2.13	27.68
PK	366.4M	35.26	46.00	-10.74	-7.69	3	Vertical	4	2.00	-	42.95	15.38	3.97	27.04
PK	399.6M	33.01	46.00	-12.99	-7.02	3	Vertical	38	2.00	-	40.03	16.22	4.10	27.34

Mode 3

18/05/2022

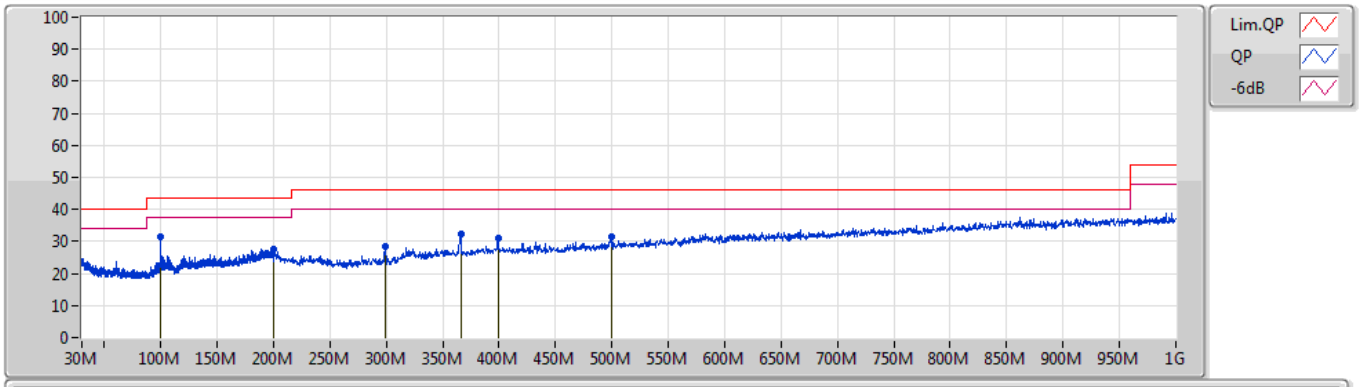


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	100.04M	31.53	43.50	-11.97	-16.31	3	Horizontal	133	1.00	"Worst"	47.84	9.60	1.90	27.81
PK	199.92M	27.68	43.50	-15.82	-9.56	3	Horizontal	229	3.00	-	37.24	14.51	3.20	27.27
PK	299.6M	28.37	46.00	-17.63	-9.67	3	Horizontal	286	1.00	-	38.04	13.20	3.50	26.37
PK	366.4M	32.51	46.00	-13.49	-7.69	3	Horizontal	214	2.00	-	40.20	15.38	3.97	27.04
PK	399.6M	31.24	46.00	-14.76	-7.02	3	Horizontal	11	1.00	-	38.26	16.22	4.10	27.34
PK	499.6M	31.66	46.00	-14.34	-5.79	3	Horizontal	15	1.00	-	37.45	17.51	4.60	27.90

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW160_Nss1,(MCS0)_1TX	Pass	AV	5.3928G	53.99	54.00	-0.01	3	Vertical	74	1.29	-

802.11a_Nss1,(6Mbps)_1TX

5180MHz_TnomVnom

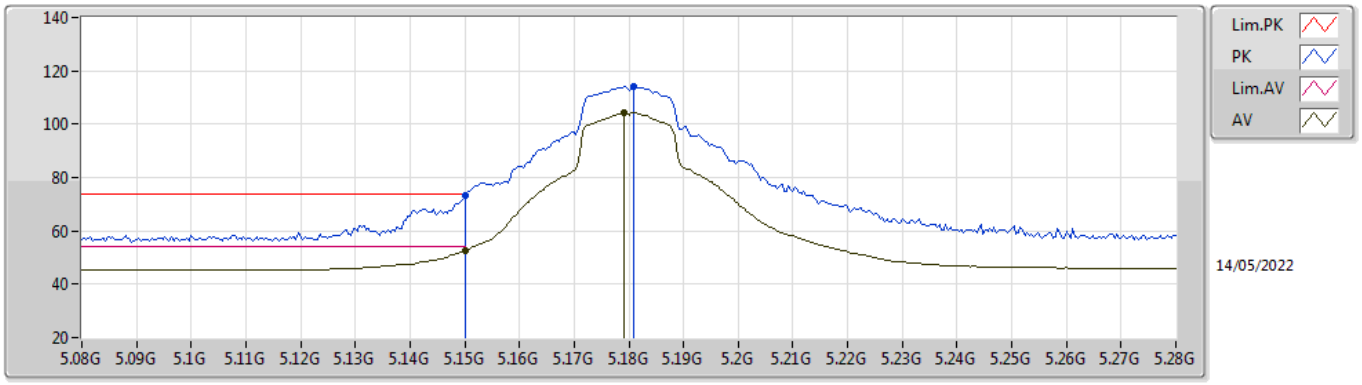


EUT X_1TX
Setting 21.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	73.45	74.00	-0.55	67.62	3	Vertical	75	1.11	-	34.00	7.17	35.34
AV	5.15G	52.71	54.00	-1.29	46.88	3	Vertical	75	1.11	-	34.00	7.17	35.34
PK	5.1808G	114.18	Inf	-Inf	108.21	3	Vertical	75	1.11	-	34.12	7.19	35.34
AV	5.1792G	104.21	Inf	-Inf	98.24	3	Vertical	75	1.11	-	34.12	7.19	35.34

802.11a_Nss1,(6Mbps)_1TX

5180MHz_TnomVnom

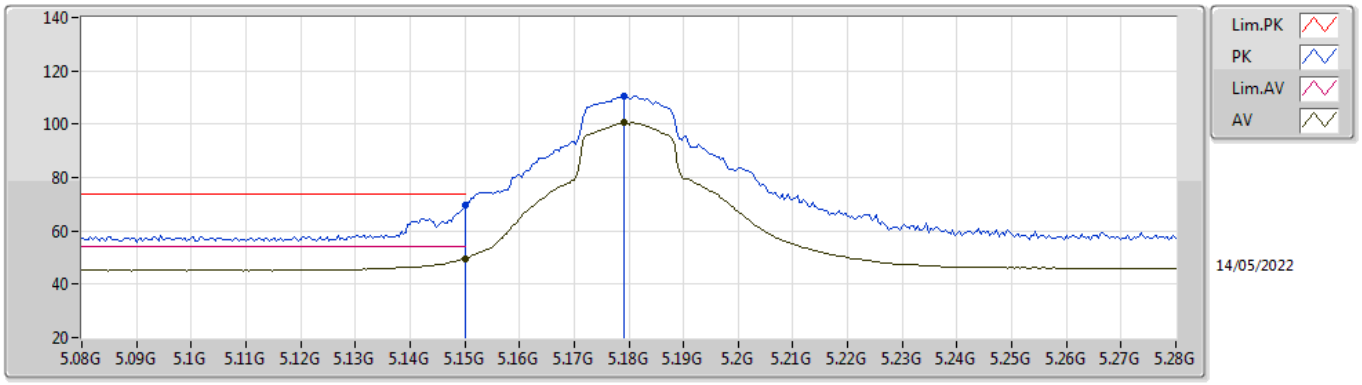


EUT X_1TX
Setting 21.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	69.74	74.00	-4.26	63.91	3	Horizontal	200	2.04	-	34.00	7.17	35.34
AV	5.15G	49.73	54.00	-4.27	43.90	3	Horizontal	200	2.04	-	34.00	7.17	35.34
PK	5.1792G	110.37	Inf	-Inf	104.40	3	Horizontal	200	2.04	-	34.12	7.19	35.34
AV	5.1792G	100.54	Inf	-Inf	94.57	3	Horizontal	200	2.04	-	34.12	7.19	35.34

802.11a_Nss1,(6Mbps)_1TX

5180MHz_TnomVnom

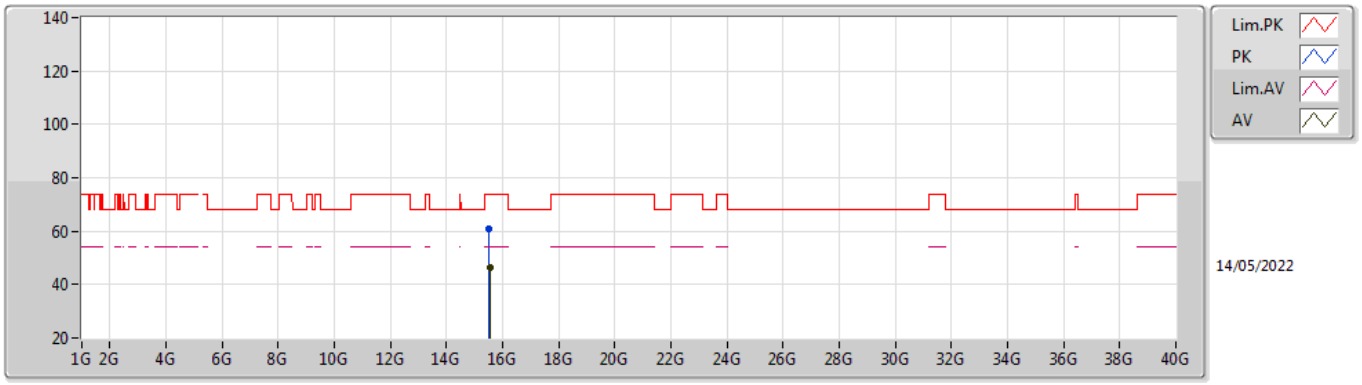


EUT X_1TX
Setting 21.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.52824G	60.68	74.00	-13.32	44.41	3	Vertical	283	1.27	-	38.50	13.16	35.39
AV	15.53694G	46.43	54.00	-7.57	30.22	3	Vertical	283	1.27	-	38.44	13.17	35.40

802.11a_Nss1,(6Mbps)_1TX

5180MHz_TnomVnom

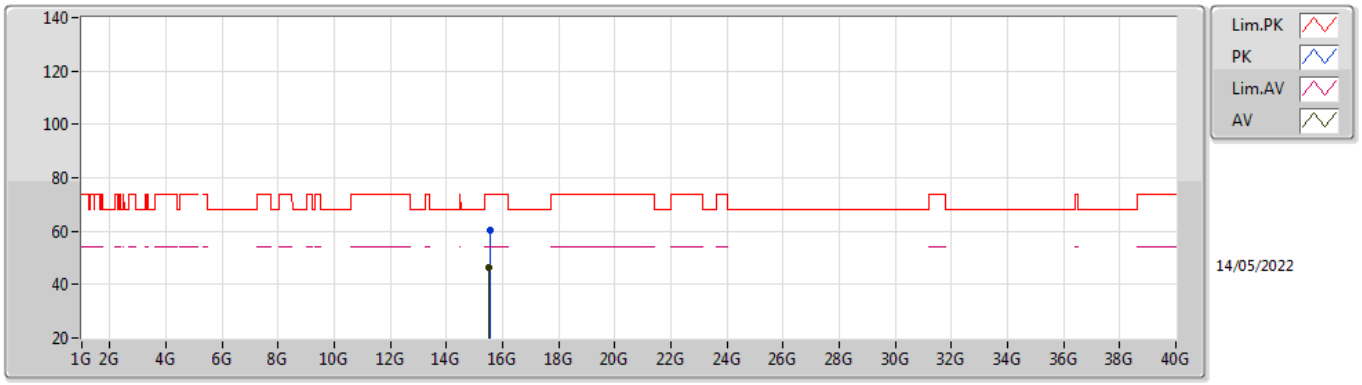


EUT X_1TX
Setting 21.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.53778G	60.24	74.00	-13.76	44.03	3	Horizontal	112	2.93	-	38.44	13.17	35.40
AV	15.52962G	46.52	54.00	-7.48	30.26	3	Horizontal	112	2.93	-	38.49	13.16	35.39

802.11a_Nss1,(6Mbps)_1TX

5200MHz_TnomVnom

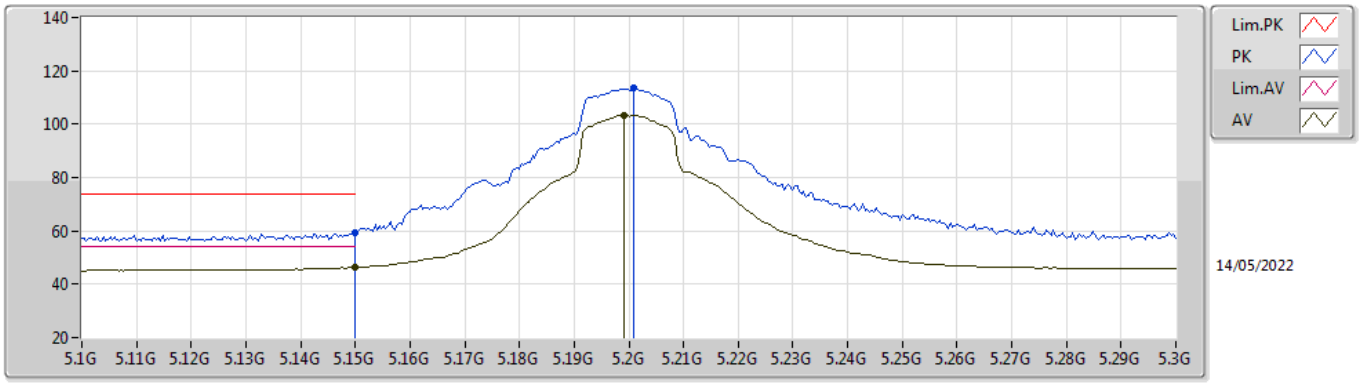


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	59.12	74.00	-14.88	53.29	3	Vertical	77	1.77	-	34.00	7.17	35.34
AV	5.15G	46.24	54.00	-7.76	40.41	3	Vertical	77	1.77	-	34.00	7.17	35.34
PK	5.2008G	113.53	Inf	-Inf	107.47	3	Vertical	77	1.77	-	34.20	7.20	35.34
AV	5.1992G	103.52	Inf	-Inf	97.46	3	Vertical	77	1.77	-	34.20	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5200MHz_TnomVnom

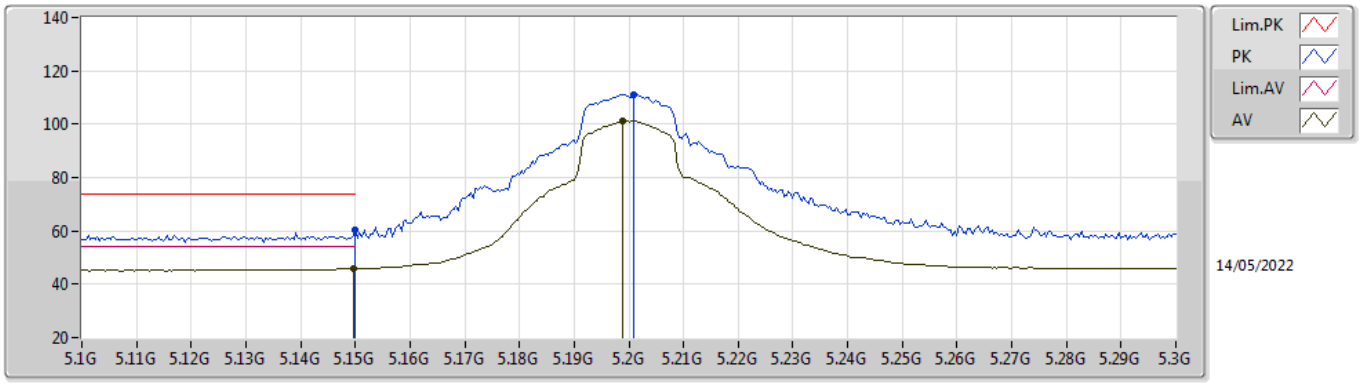


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	60.23	74.00	-13.77	54.40	3	Horizontal	203	2.24	-	34.00	7.17	35.34
AV	5.1496G	45.85	54.00	-8.15	40.02	3	Horizontal	203	2.24	-	34.00	7.17	35.34
PK	5.2008G	111.19	Inf	-Inf	105.13	3	Horizontal	203	2.24	-	34.20	7.20	35.34
AV	5.1988G	101.19	Inf	-Inf	95.13	3	Horizontal	203	2.24	-	34.20	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5200MHz_TnomVnom

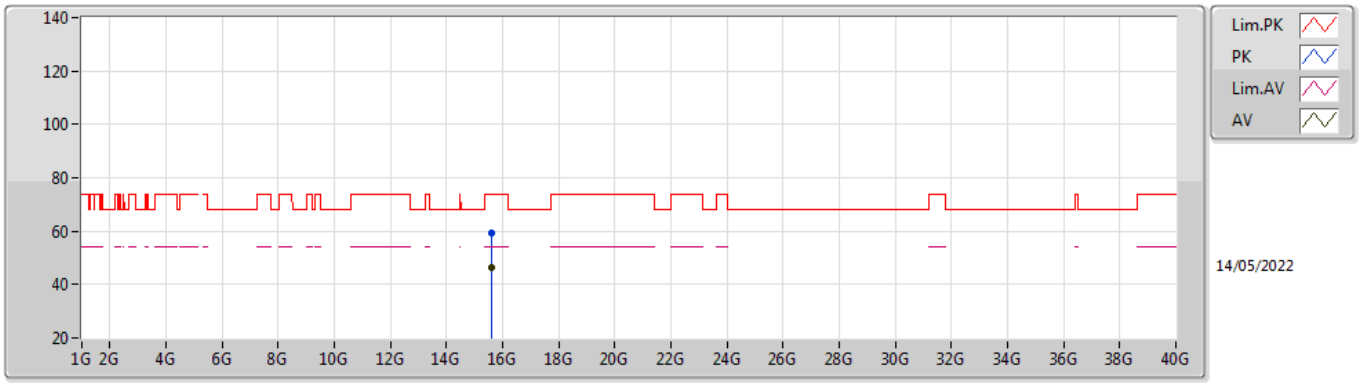


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.60216G	59.51	74.00	-14.49	43.78	3	Vertical	224	1.19	-	37.99	13.20	35.46
AV	15.58542G	46.20	54.00	-7.80	30.35	3	Vertical	224	1.19	-	38.10	13.19	35.44

802.11a_Nss1,(6Mbps)_1TX

5200MHz_TnomVnom

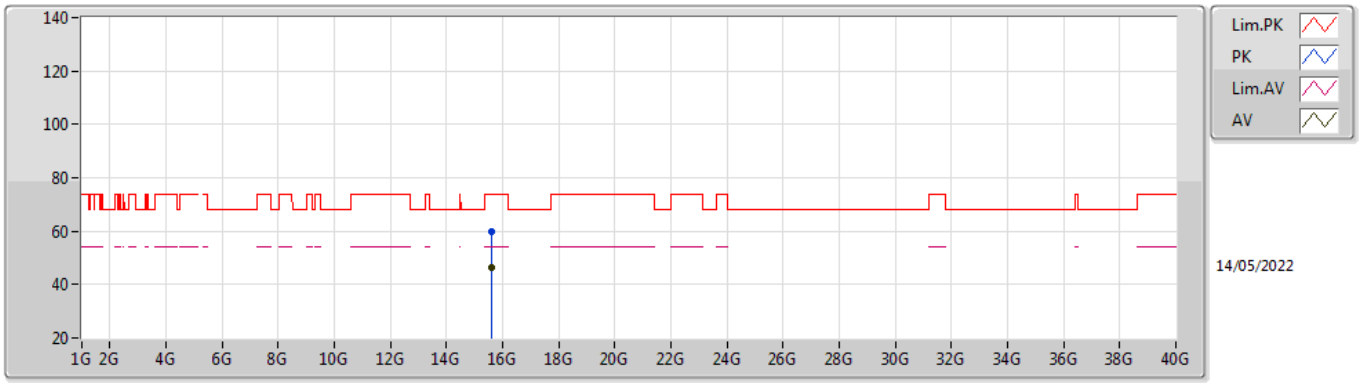


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.60858G	59.73	74.00	-14.27	44.03	3	Horizontal	119	2.50	-	37.96	13.20	35.46
AV	15.58638G	46.18	54.00	-7.82	30.33	3	Horizontal	119	2.50	-	38.10	13.19	35.44

802.11a_Nss1,(6Mbps)_1TX

5240MHz_TnomVnom

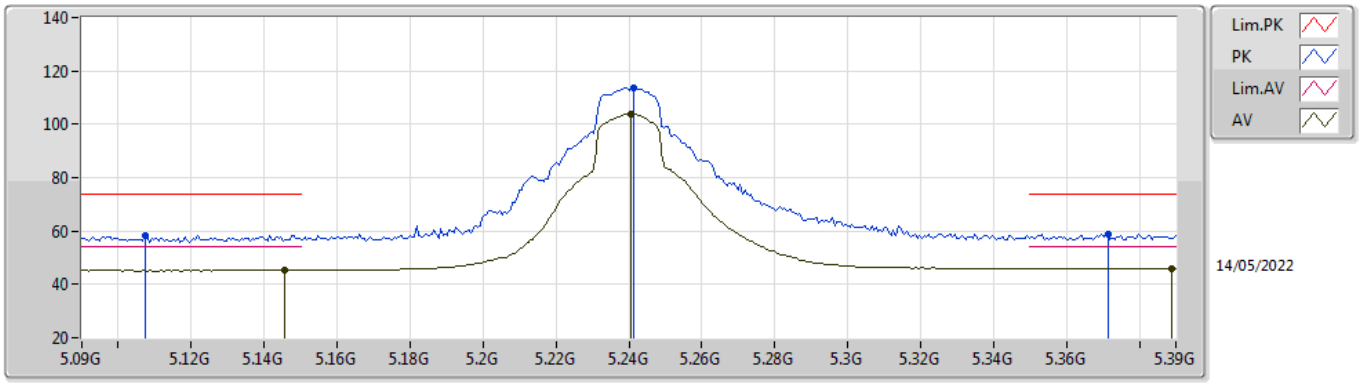


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1074G	58.44	74.00	-15.56	52.71	3	Vertical	296	2.10	-	33.91	7.15	35.33
AV	5.1458G	45.37	54.00	-8.63	39.55	3	Vertical	296	2.10	-	33.99	7.17	35.34
PK	5.2412G	113.74	Inf	-Inf	107.52	3	Vertical	296	2.10	-	34.36	7.20	35.34
AV	5.2406G	103.87	Inf	-Inf	97.65	3	Vertical	296	2.10	-	34.36	7.20	35.34
PK	5.3714G	58.72	74.00	-15.28	52.32	3	Vertical	296	2.10	-	34.54	7.20	35.34
AV	5.3888G	46.02	54.00	-7.98	39.59	3	Vertical	296	2.10	-	34.58	7.20	35.35

802.11a_Nss1,(6Mbps)_1TX

5240MHz_TnomVnom

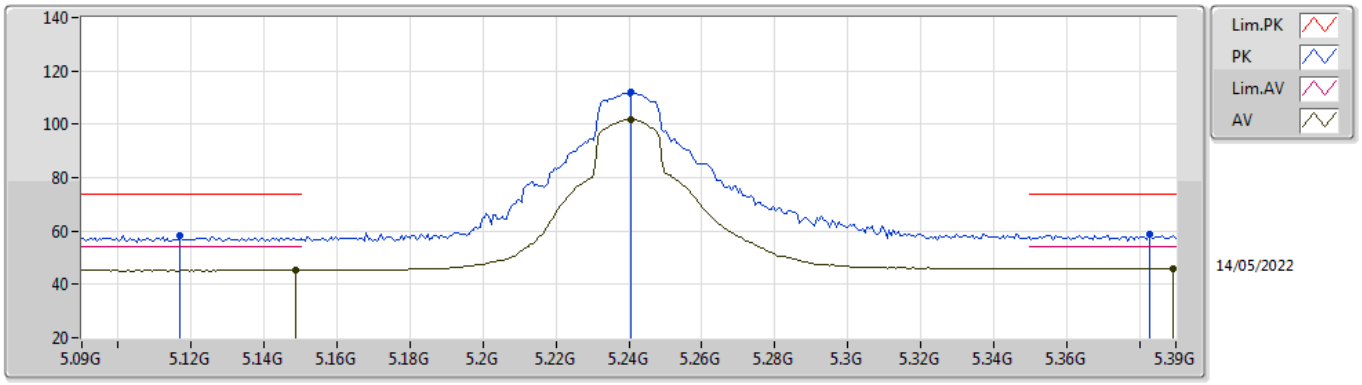


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.117G	58.26	74.00	-15.74	52.50	3	Horizontal	201	1.99	-	33.93	7.16	35.33
AV	5.1488G	45.33	54.00	-8.67	39.50	3	Horizontal	201	1.99	-	34.00	7.17	35.34
PK	5.2406G	111.91	Inf	-Inf	105.69	3	Horizontal	201	1.99	-	34.36	7.20	35.34
AV	5.2406G	101.93	Inf	-Inf	95.71	3	Horizontal	201	1.99	-	34.36	7.20	35.34
PK	5.3828G	59.01	74.00	-14.99	52.59	3	Horizontal	201	1.99	-	34.57	7.20	35.35
AV	5.3894G	46.07	54.00	-7.93	39.64	3	Horizontal	201	1.99	-	34.58	7.20	35.35

802.11a_Nss1,(6Mbps)_1TX

5240MHz_TnomVnom

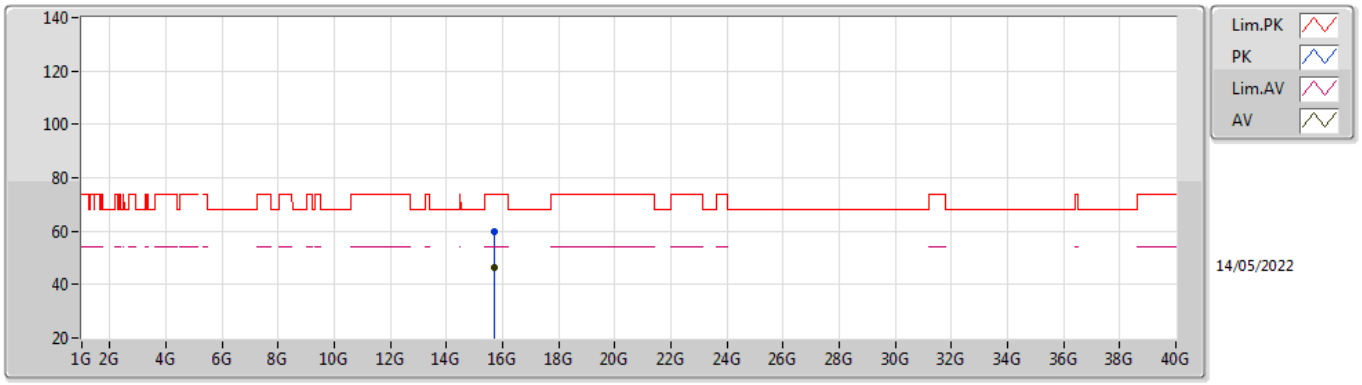


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.72618G	59.76	74.00	-14.24	44.46	3	Vertical	205	2.26	-	37.60	13.26	35.56
AV	15.7227G	46.27	54.00	-7.73	30.98	3	Vertical	205	2.26	-	37.59	13.26	35.56

802.11a_Nss1,(6Mbps)_1TX

5240MHz_TnomVnom

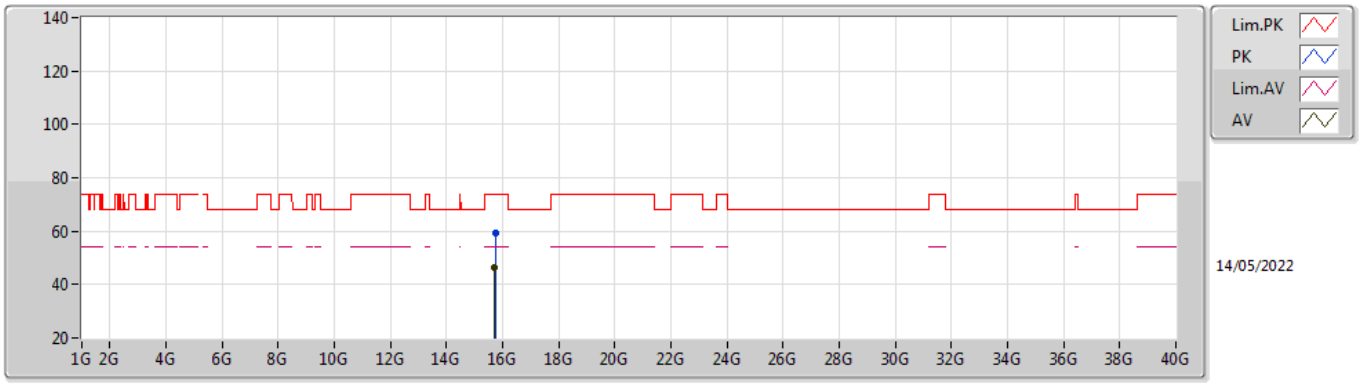


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.73026G	59.56	74.00	-14.44	44.23	3	Horizontal	210	2.61	-	37.62	13.27	35.56
AV	15.70944G	46.20	54.00	-7.80	30.96	3	Horizontal	210	2.61	-	37.54	13.25	35.55

802.11a_Nss1,(6Mbps)_1TX

5260MHz_TnomVnom

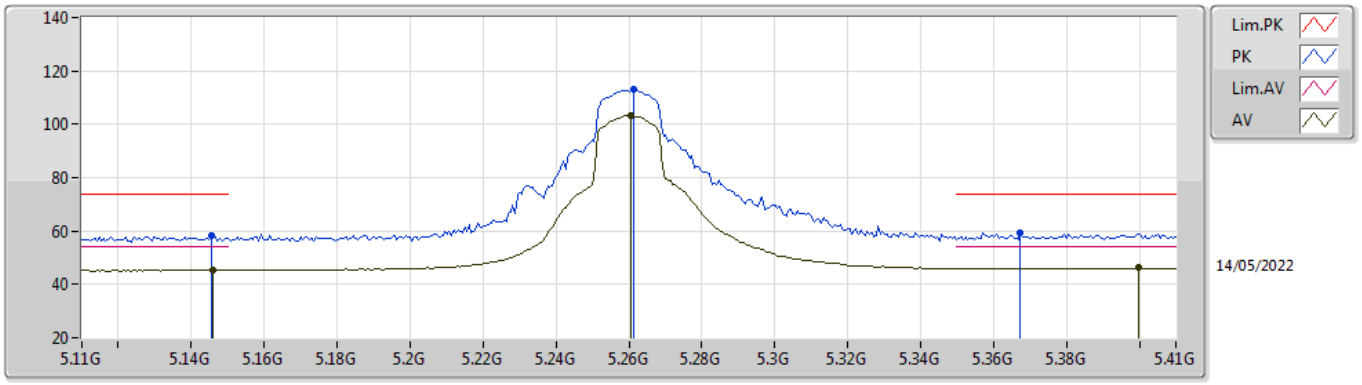


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1454G	58.11	74.00	-15.89	52.29	3	Vertical	74	1.00	-	33.99	7.17	35.34
AV	5.146G	45.38	54.00	-8.62	39.56	3	Vertical	74	1.00	-	33.99	7.17	35.34
PK	5.2612G	113.08	Inf	-Inf	106.80	3	Vertical	74	1.00	-	34.42	7.20	35.34
AV	5.2606G	103.20	Inf	-Inf	96.92	3	Vertical	74	1.00	-	34.42	7.20	35.34
PK	5.3674G	59.31	74.00	-14.69	52.92	3	Vertical	74	1.00	-	34.53	7.20	35.34
AV	5.3998G	46.13	54.00	-7.87	39.68	3	Vertical	74	1.00	-	34.60	7.20	35.35

802.11a_Nss1,(6Mbps)_1TX

5260MHz_TnomVnom

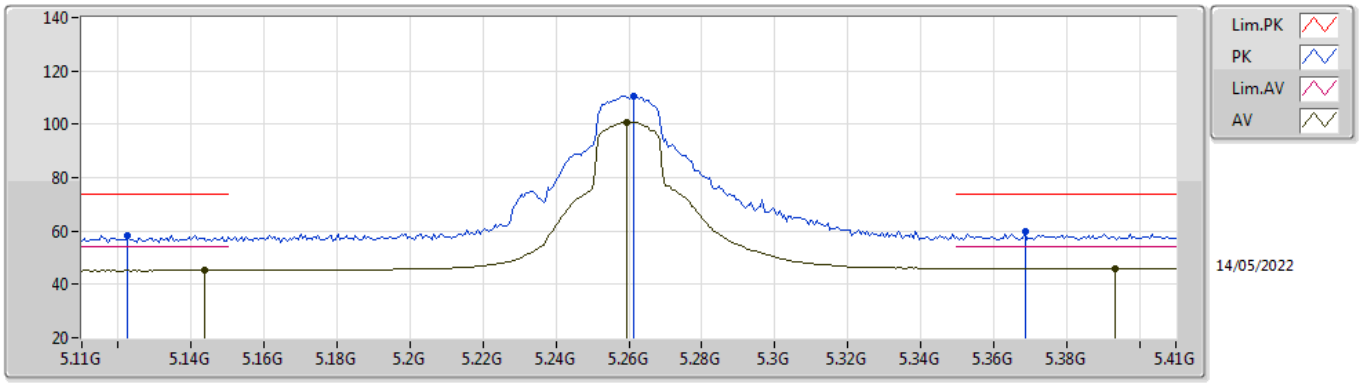


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1226G	58.48	74.00	-15.52	52.70	3	Horizontal	201	2.18	-	33.95	7.16	35.33
AV	5.1436G	45.34	54.00	-8.66	39.52	3	Horizontal	201	2.18	-	33.99	7.17	35.34
PK	5.2612G	110.65	Inf	-Inf	104.37	3	Horizontal	201	2.18	-	34.42	7.20	35.34
AV	5.2594G	100.91	Inf	-Inf	94.63	3	Horizontal	201	2.18	-	34.42	7.20	35.34
PK	5.3686G	59.70	74.00	-14.30	53.30	3	Horizontal	201	2.18	-	34.54	7.20	35.34
AV	5.3932G	46.10	54.00	-7.90	39.66	3	Horizontal	201	2.18	-	34.59	7.20	35.35

802.11a_Nss1,(6Mbps)_1TX

5260MHz_TnomVnom

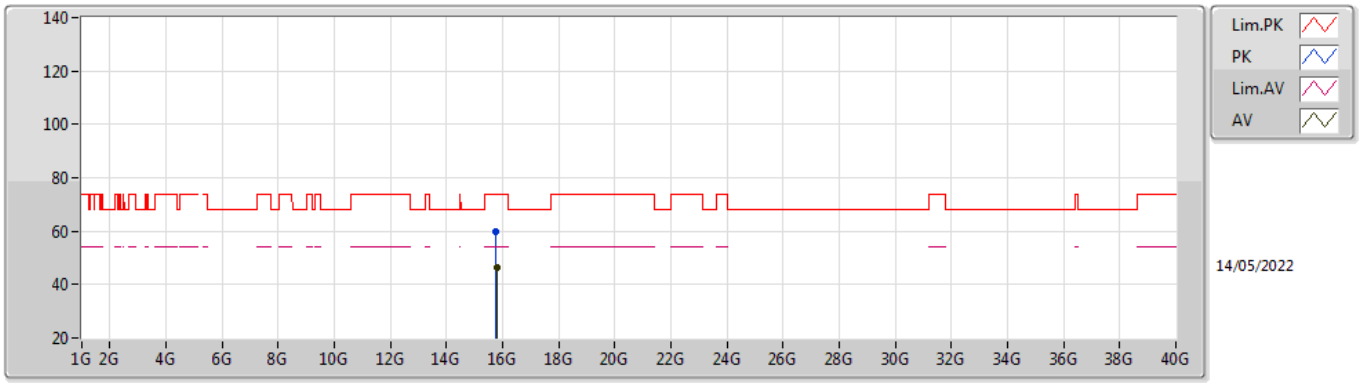


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.76584G	59.96	74.00	-14.04	44.51	3	Vertical	348	1.29	-	37.76	13.28	35.59
AV	15.78942G	46.40	54.00	-7.60	30.86	3	Vertical	348	1.29	-	37.86	13.29	35.61

802.11a_Nss1,(6Mbps)_1TX

5260MHz_TnomVnom

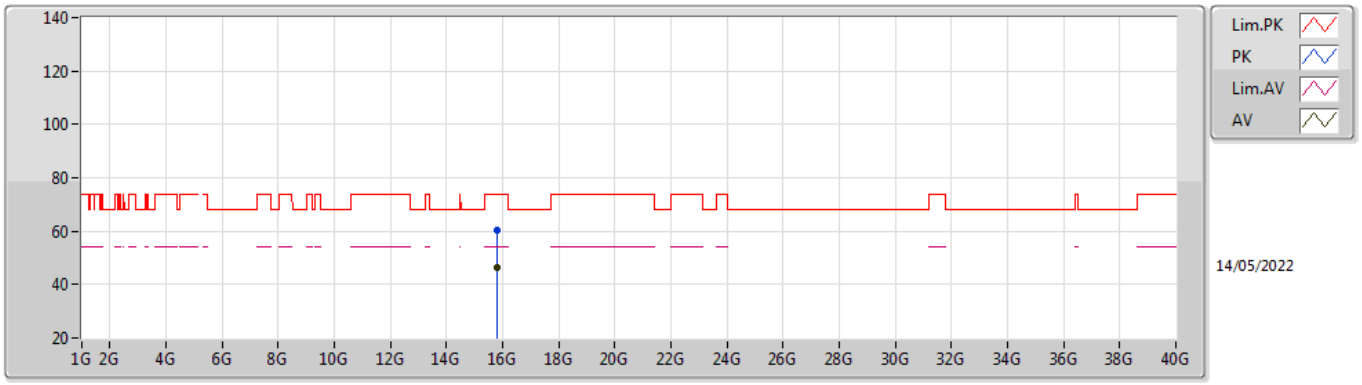


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.78558G	60.12	74.00	-13.88	44.60	3	Horizontal	104	2.50	-	37.84	13.29	35.61
AV	15.78954G	46.36	54.00	-7.64	30.82	3	Horizontal	104	2.50	-	37.86	13.29	35.61

802.11a_Nss1,(6Mbps)_1TX

5300MHz_TnomVnom

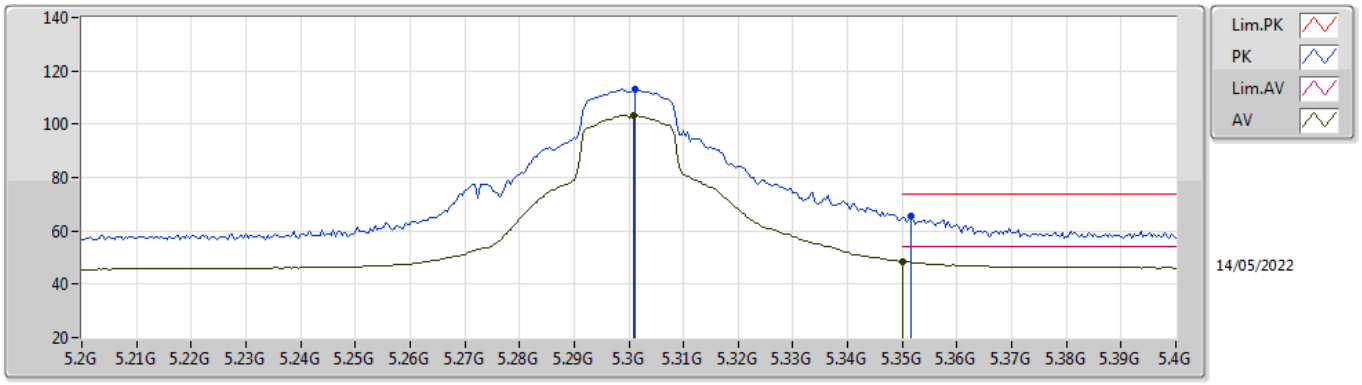


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3012G	113.14	Inf	-Inf	106.78	3	Vertical	313	1.98	-	34.50	7.20	35.34
AV	5.3008G	103.28	Inf	-Inf	96.92	3	Vertical	313	1.98	-	34.50	7.20	35.34
PK	5.3516G	65.70	74.00	-8.30	59.34	3	Vertical	313	1.98	-	34.50	7.20	35.34
AV	5.35G	48.49	54.00	-5.51	42.13	3	Vertical	313	1.98	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5300MHz_TnomVnom

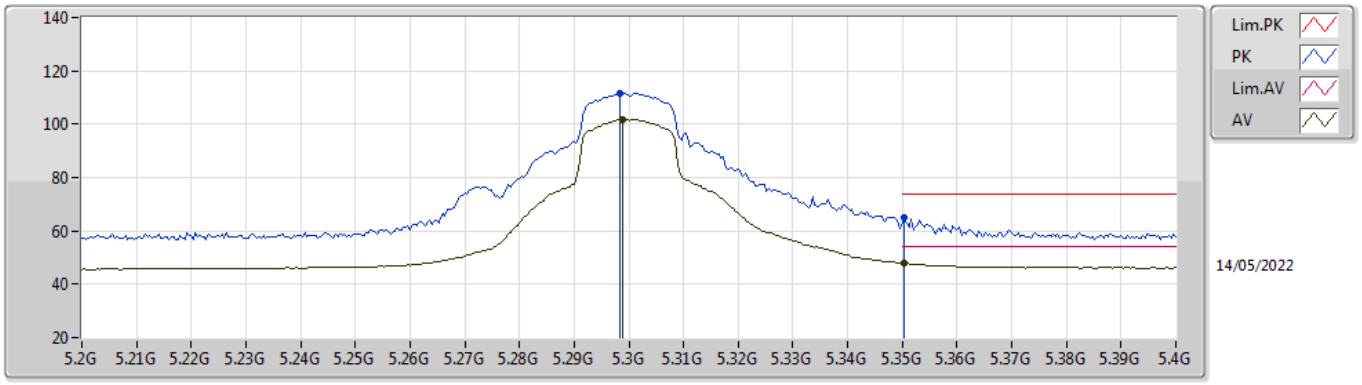


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2984G	111.70	Inf	-Inf	105.34	3	Horizontal	200	1.97	-	34.50	7.20	35.34
AV	5.2988G	101.93	Inf	-Inf	95.57	3	Horizontal	200	1.97	-	34.50	7.20	35.34
PK	5.3504G	64.83	74.00	-9.17	58.47	3	Horizontal	200	1.97	-	34.50	7.20	35.34
AV	5.3504G	47.84	54.00	-6.16	41.48	3	Horizontal	200	1.97	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5300MHz_TnomVnom

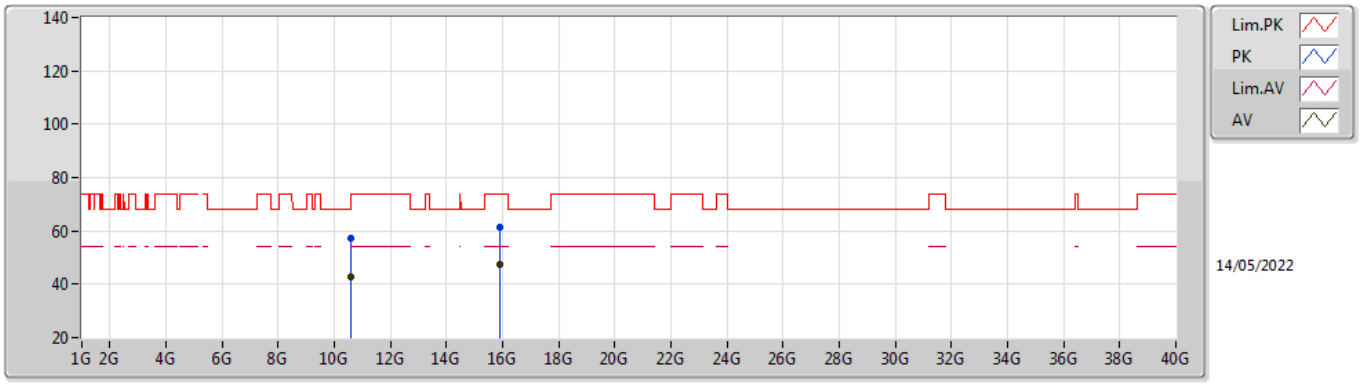


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.59658G	57.27	68.20	-10.93	43.87	3	Vertical	203	1.80	-	38.20	10.59	35.39
AV	10.60144G	42.65	54.00	-11.35	29.24	3	Vertical	203	1.80	-	38.20	10.59	35.38
PK	15.90042G	61.40	74.00	-12.60	46.16	3	Vertical	153	1.88	-	37.60	13.35	35.71
AV	15.89838G	47.67	54.00	-6.33	32.42	3	Vertical	153	1.88	-	37.60	13.35	35.70

802.11a_Nss1,(6Mbps)_1TX

5300MHz_TnomVnom

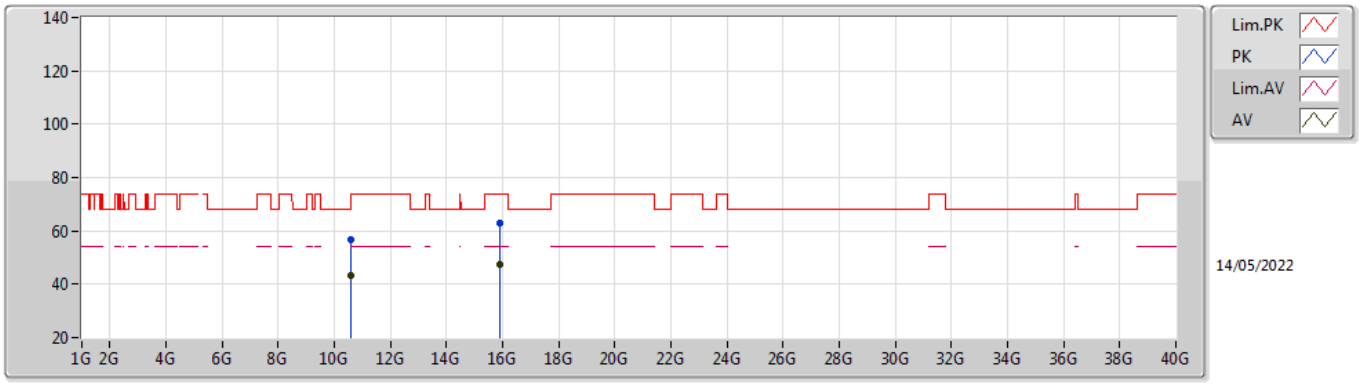


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60246G	56.74	74.00	-17.26	43.33	3	Horizontal	219	2.28	-	38.20	10.59	35.38
AV	10.6015G	43.23	54.00	-10.77	29.82	3	Horizontal	219	2.28	-	38.20	10.59	35.38
PK	15.9051G	62.82	74.00	-11.18	47.59	3	Horizontal	152	1.85	-	37.59	13.35	35.71
AV	15.90288G	47.48	54.00	-6.52	32.25	3	Horizontal	152	1.85	-	37.59	13.35	35.71

802.11a_Nss1,(6Mbps)_1TX

5320MHz_TnomVnom

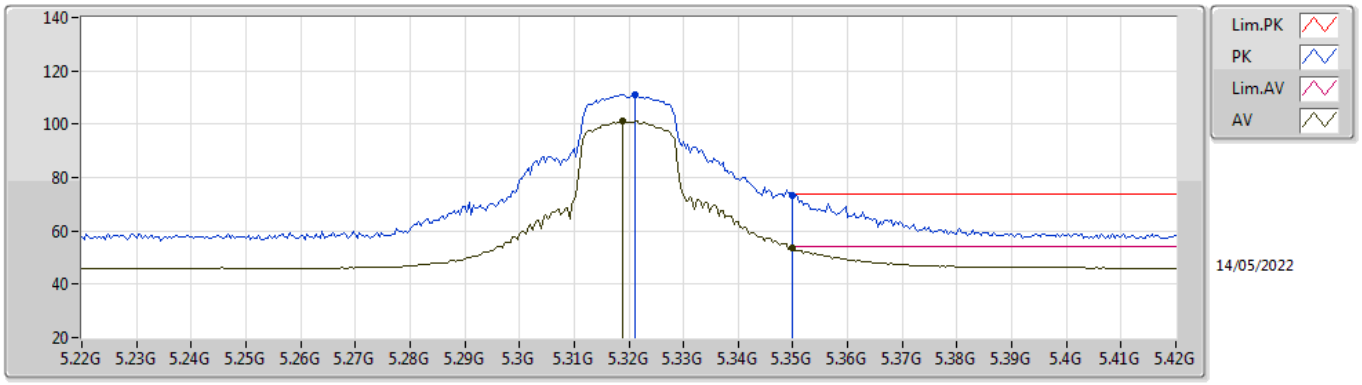


EUT X_1TX
Setting 18.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3212G	111.04	Inf	-Inf	104.68	3	Vertical	314	1.99	-	34.50	7.20	35.34
AV	5.3188G	101.34	Inf	-Inf	94.98	3	Vertical	314	1.99	-	34.50	7.20	35.34
PK	5.35G	73.53	74.00	-0.47	67.17	3	Vertical	314	1.99	-	34.50	7.20	35.34
AV	5.35G	53.77	54.00	-0.23	47.41	3	Vertical	314	1.99	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5320MHz_TnomVnom

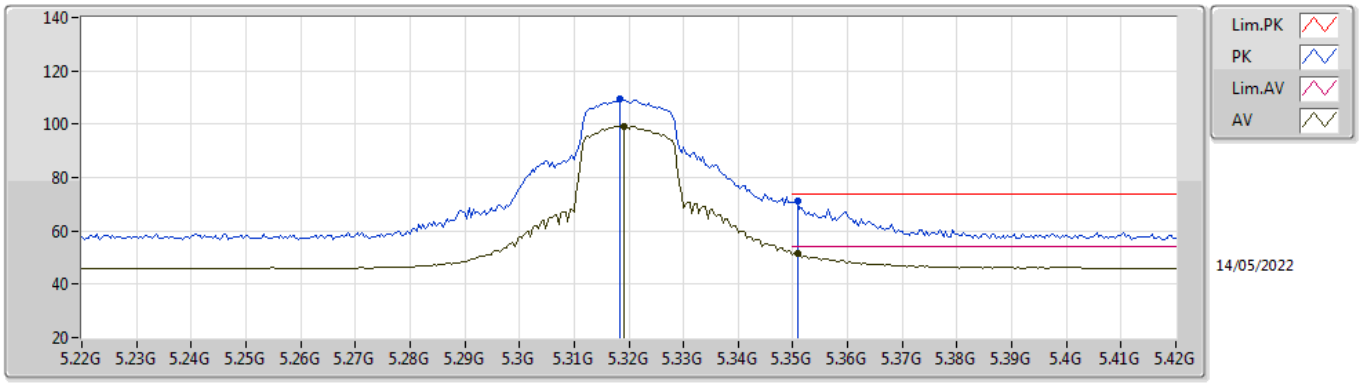


EUT X_1TX
Setting 18.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3184G	109.51	Inf	-Inf	103.15	3	Horizontal	202	2.09	-	34.50	7.20	35.34
AV	5.3192G	99.38	Inf	-Inf	93.02	3	Horizontal	202	2.09	-	34.50	7.20	35.34
PK	5.3508G	70.97	74.00	-3.03	64.61	3	Horizontal	202	2.09	-	34.50	7.20	35.34
AV	5.3508G	51.73	54.00	-2.27	45.37	3	Horizontal	202	2.09	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5320MHz_TnomVnom

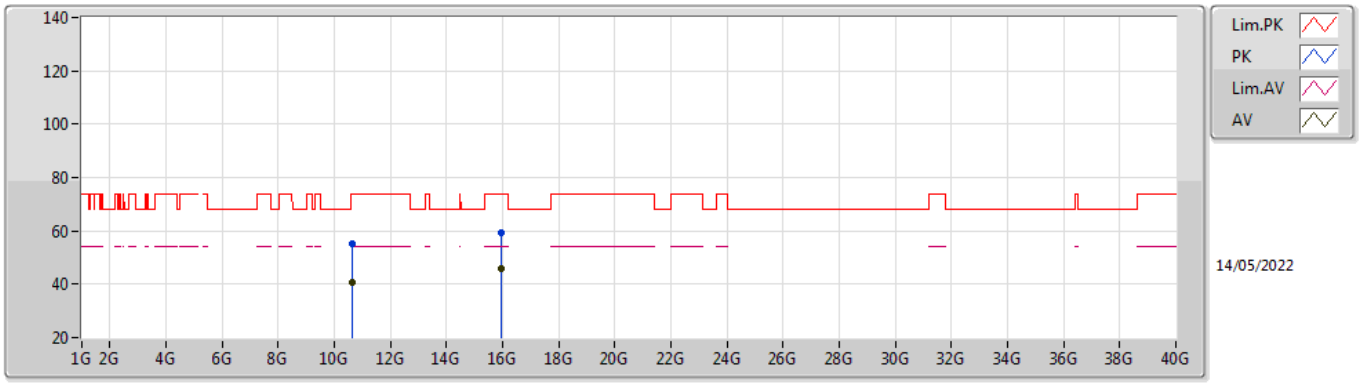


EUT X_1TX
Setting 18.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.62872G	55.04	74.00	-18.96	41.55	3	Vertical	345	1.22	-	38.26	10.59	35.36
AV	10.65392G	40.89	54.00	-13.11	27.32	3	Vertical	345	1.22	-	38.31	10.60	35.34
PK	15.94794G	59.14	74.00	-14.86	44.02	3	Vertical	261	1.34	-	37.50	13.37	35.75
AV	15.95178G	45.89	54.00	-8.11	30.76	3	Vertical	261	1.34	-	37.50	13.38	35.75

802.11a_Nss1,(6Mbps)_1TX

5320MHz_TnomVnom

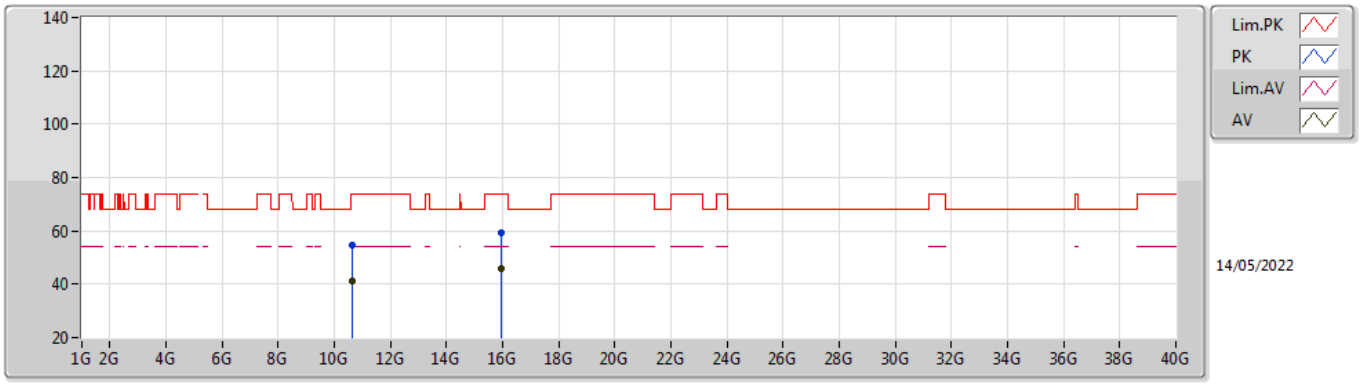


EUT X_1TX
Setting 18.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.63004G	54.60	74.00	-19.40	41.11	3	Horizontal	102	1.41	-	38.26	10.59	35.36
AV	10.64012G	40.95	54.00	-13.05	27.42	3	Horizontal	102	1.41	-	38.28	10.60	35.35
PK	15.97176G	59.31	74.00	-14.69	44.23	3	Horizontal	130	1.74	-	37.46	13.39	35.77
AV	15.95628G	45.91	54.00	-8.09	30.79	3	Horizontal	130	1.74	-	37.49	13.38	35.75

802.11a_Nss1,(6Mbps)_1TX

5500MHz_TnomVnom

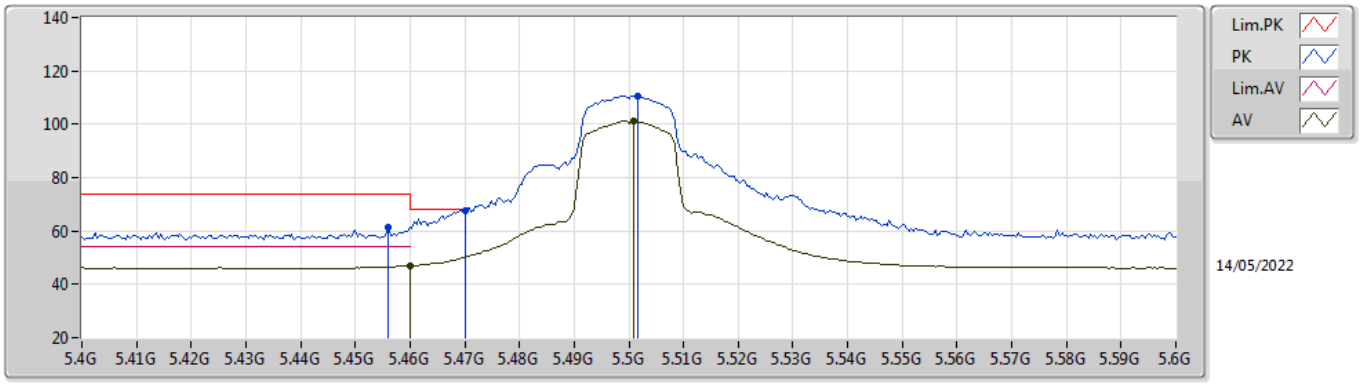


EUT X_1TX
Setting 18.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.456G	61.41	74.00	-12.59	54.99	3	Vertical	321	1.92	-	34.51	7.26	35.35
AV	5.46G	46.90	54.00	-7.10	40.47	3	Vertical	321	1.92	-	34.52	7.26	35.35
PK	5.47G	67.80	68.20	-0.40	61.34	3	Vertical	321	1.92	-	34.54	7.27	35.35
PK	5.5016G	110.77	Inf	-Inf	104.22	3	Vertical	321	1.92	-	34.60	7.30	35.35
AV	5.5008G	101.17	Inf	-Inf	94.62	3	Vertical	321	1.92	-	34.60	7.30	35.35

802.11a_Nss1,(6Mbps)_1TX

5500MHz_TnomVnom

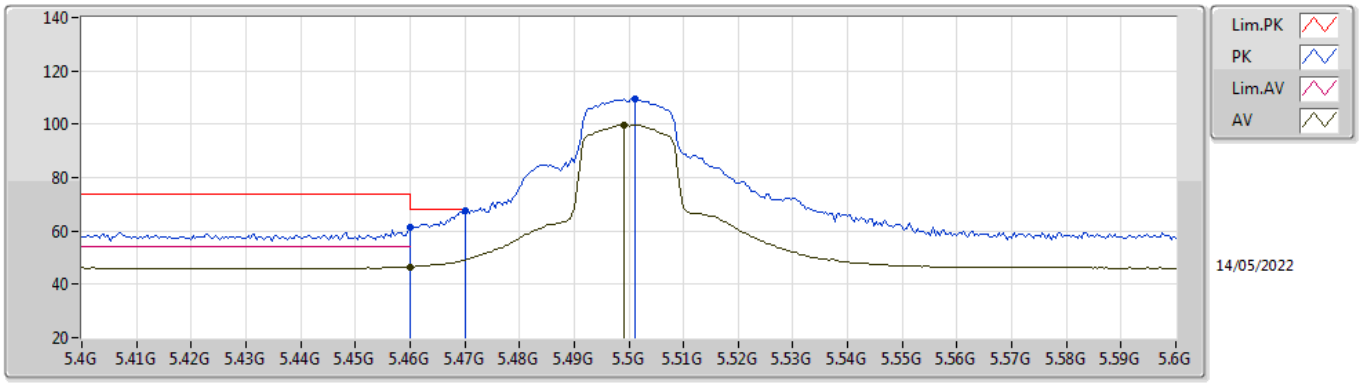


EUT X_1TX
Setting 18.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.46G	61.63	74.00	-12.37	55.20	3	Horizontal	196	2.06	-	34.52	7.26	35.35
AV	5.46G	46.63	54.00	-7.37	40.20	3	Horizontal	196	2.06	-	34.52	7.26	35.35
PK	5.47G	67.76	68.20	-0.44	61.30	3	Horizontal	196	2.06	-	34.54	7.27	35.35
PK	5.5012G	109.50	Inf	-Inf	102.95	3	Horizontal	196	2.06	-	34.60	7.30	35.35
AV	5.4992G	99.88	Inf	-Inf	93.33	3	Horizontal	196	2.06	-	34.60	7.30	35.35

802.11a_Nss1,(6Mbps)_1TX

5500MHz_TnomVnom

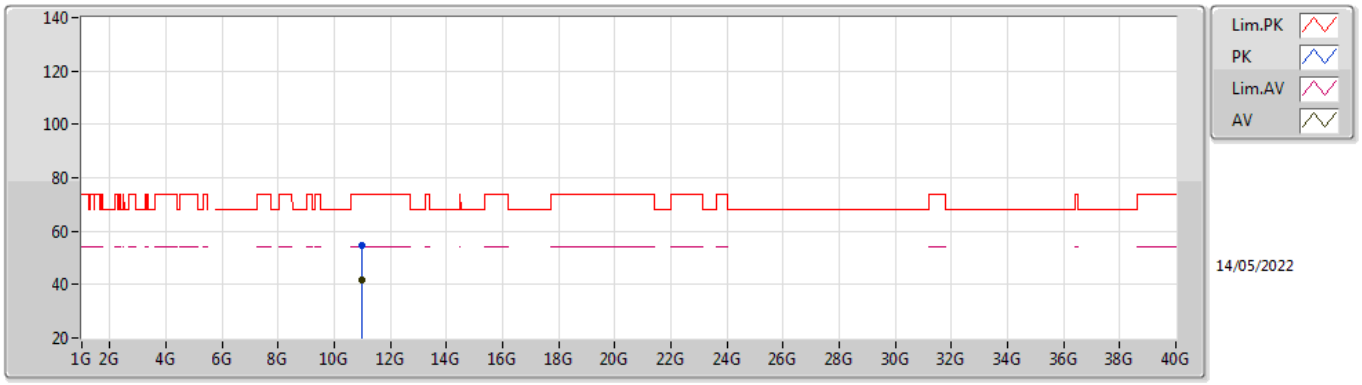


EUT X_1TX
Setting 18.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9883G	54.78	74.00	-19.22	40.79	3	Vertical	336	2.41	-	38.39	10.65	35.05
AV	10.99712G	41.55	54.00	-12.45	27.54	3	Vertical	336	2.41	-	38.40	10.65	35.04

802.11a_Nss1,(6Mbps)_1TX

5500MHz_TnomVnom

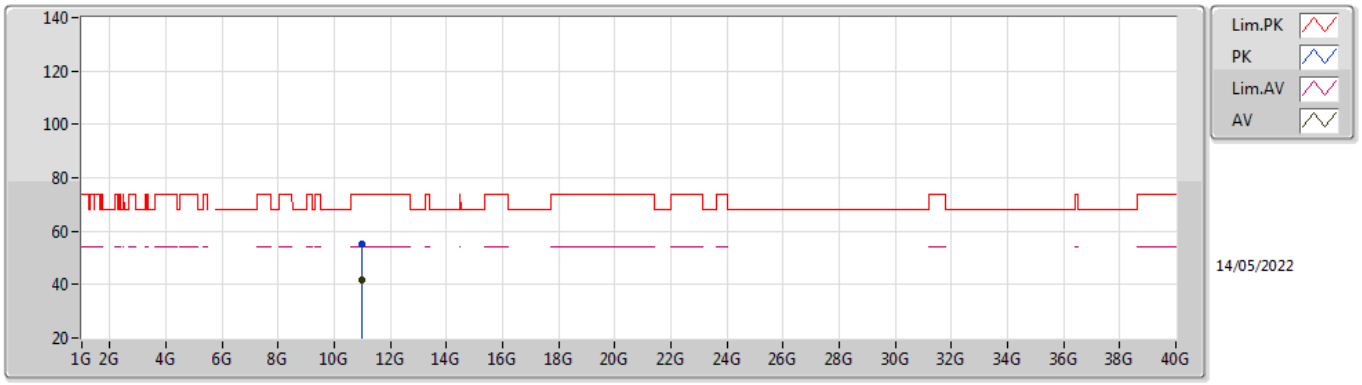


EUT X_1TX
Setting 18.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.99904G	55.26	74.00	-18.74	41.25	3	Horizontal	219	1.14	-	38.40	10.65	35.04
AV	10.98554G	41.53	54.00	-12.47	27.54	3	Horizontal	219	1.14	-	38.39	10.65	35.05

802.11a_Nss1,(6Mbps)_1TX

5580MHz_TnomVnom

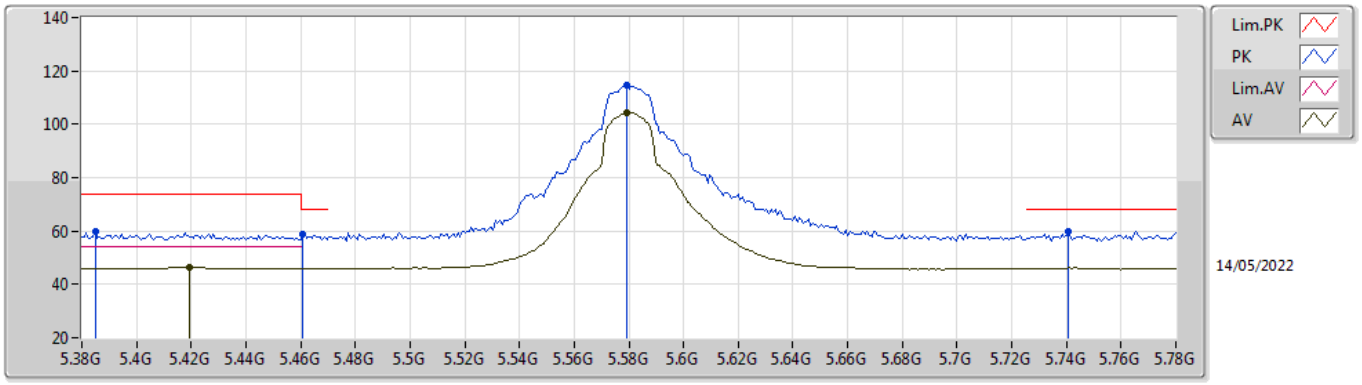


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3848G	59.68	74.00	-14.32	53.26	3	Vertical	321	2.05	-	34.57	7.20	35.35
AV	5.4192G	46.55	54.00	-7.45	40.12	3	Vertical	321	2.05	-	34.56	7.22	35.35
PK	5.4608G	59.03	68.20	-9.17	52.60	3	Vertical	321	2.05	-	34.52	7.26	35.35
PK	5.5792G	114.45	Inf	-Inf	107.86	3	Vertical	321	2.05	-	34.60	7.38	35.39
AV	5.5792G	104.46	Inf	-Inf	97.87	3	Vertical	321	2.05	-	34.60	7.38	35.39
PK	5.7408G	59.71	68.20	-8.49	53.56	3	Vertical	321	2.05	-	34.22	7.40	35.47

802.11a_Nss1,(6Mbps)_1TX

5580MHz_TnomVnom

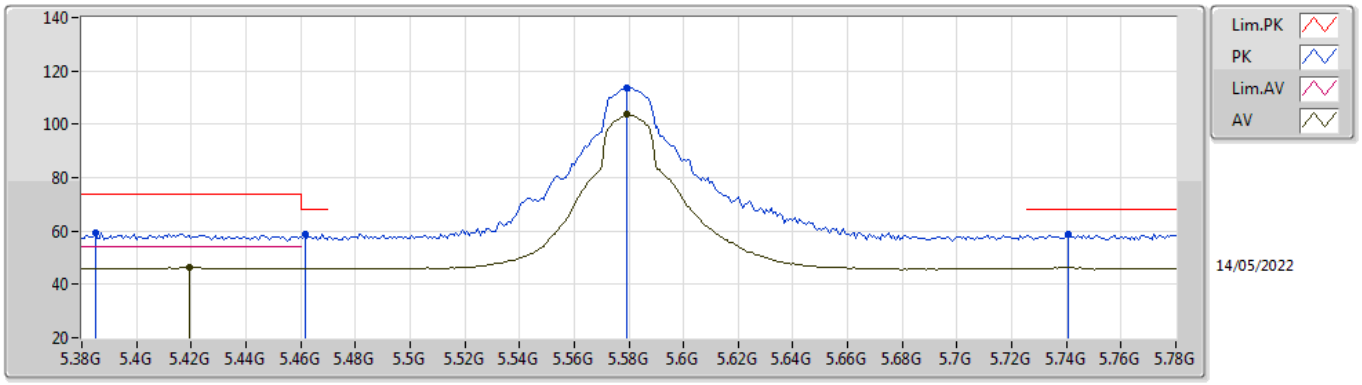


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3848G	59.48	74.00	-14.52	53.06	3	Horizontal	196	1.93	-	34.57	7.20	35.35
AV	5.4192G	46.35	54.00	-7.65	39.92	3	Horizontal	196	1.93	-	34.56	7.22	35.35
PK	5.4616G	58.99	68.20	-9.21	52.56	3	Horizontal	196	1.93	-	34.52	7.26	35.35
PK	5.5792G	113.58	Inf	-Inf	106.99	3	Horizontal	196	1.93	-	34.60	7.38	35.39
AV	5.5792G	103.61	Inf	-Inf	97.02	3	Horizontal	196	1.93	-	34.60	7.38	35.39
PK	5.7408G	58.97	68.20	-9.23	52.82	3	Horizontal	196	1.93	-	34.22	7.40	35.47

802.11a_Nss1,(6Mbps)_1TX

5580MHz_TnomVnom

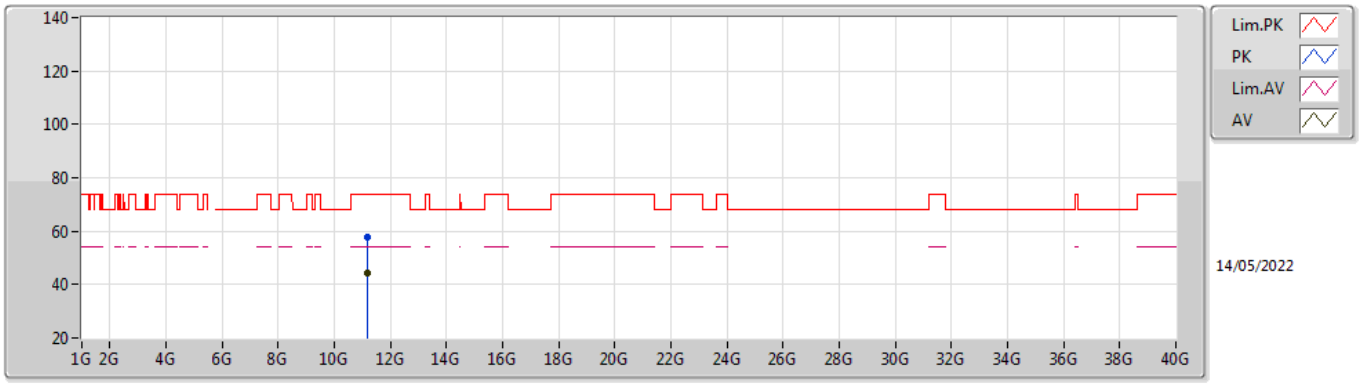


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.15862G	57.56	74.00	-16.44	43.55	3	Vertical	326	1.80	-	38.56	10.67	35.22
AV	11.16108G	44.07	54.00	-9.93	30.06	3	Vertical	326	1.80	-	38.56	10.67	35.22

802.11a_Nss1,(6Mbps)_1TX

5580MHz_TnomVnom

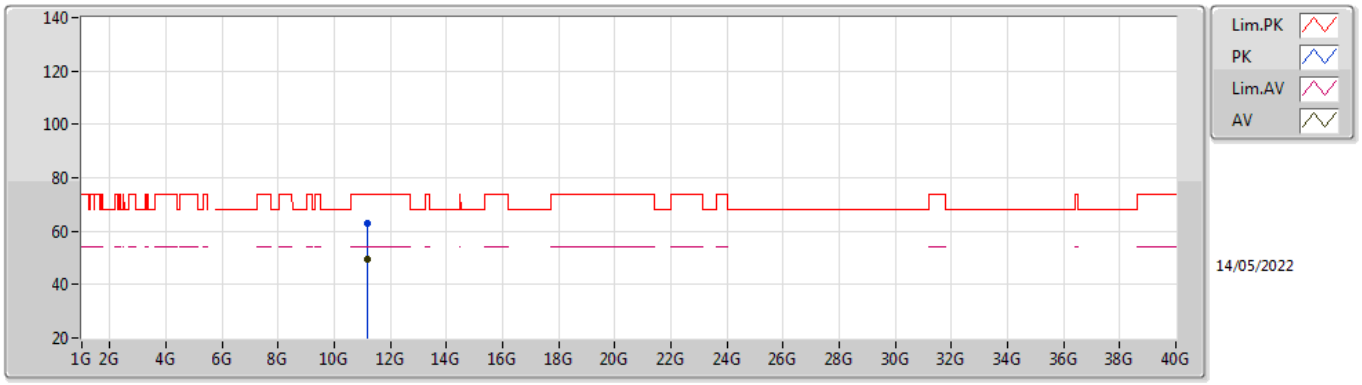


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1618G	63.05	74.00	-10.95	49.04	3	Horizontal	234	2.13	-	38.56	10.67	35.22
AV	11.16144G	49.33	54.00	-4.67	35.32	3	Horizontal	234	2.13	-	38.56	10.67	35.22

802.11a_Nss1,(6Mbps)_1TX

5700MHz_TnomVnom

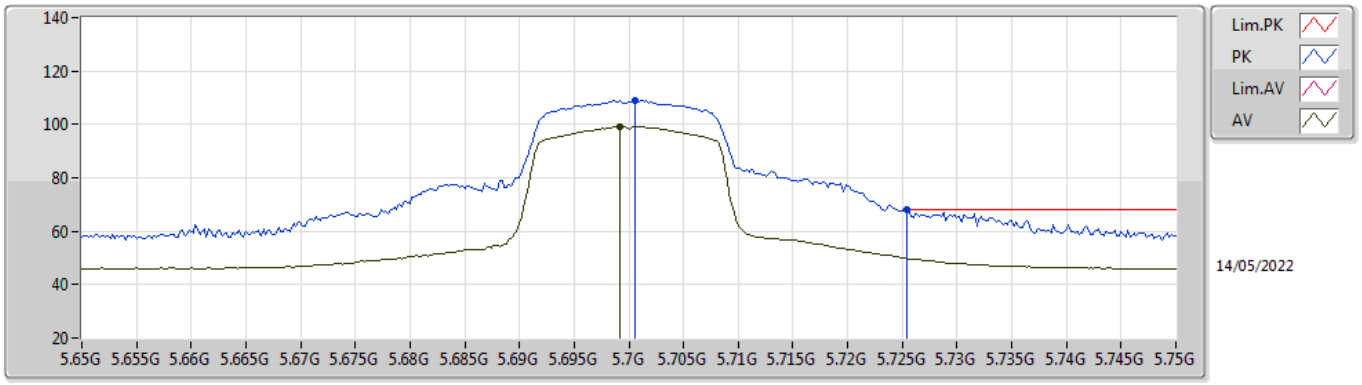


EUT X_1TX
Setting 15.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7006G	108.96	Inf	-Inf	102.71	3	Vertical	326	2.10	-	34.30	7.40	35.45
AV	5.6992G	99.15	Inf	-Inf	92.90	3	Vertical	326	2.10	-	34.30	7.40	35.45
PK	5.7254G	67.95	68.20	-0.25	61.76	3	Vertical	326	2.10	-	34.25	7.40	35.46

802.11a_Nss1,(6Mbps)_1TX

5700MHz_TnomVnom

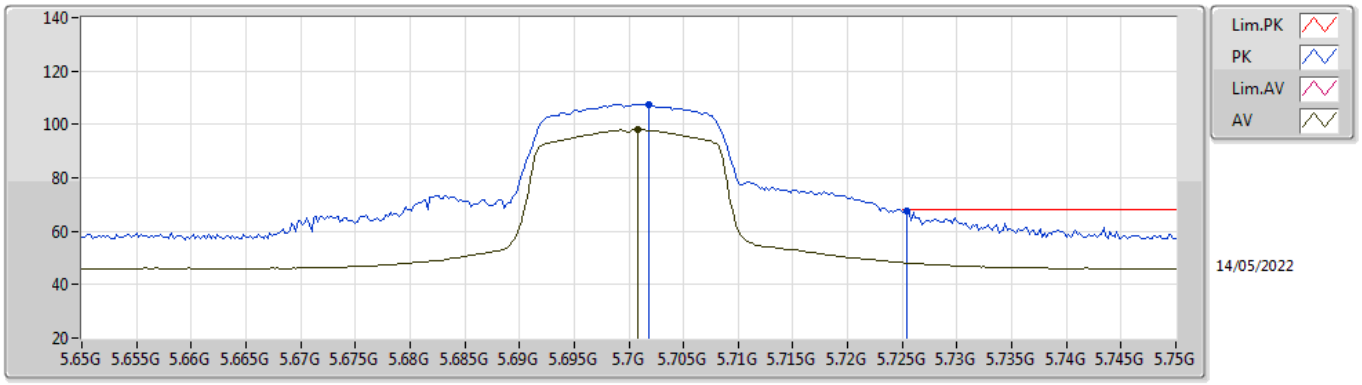


EUT X_1TX
Setting 15.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7018G	107.66	Inf	-Inf	101.41	3	Horizontal	191	2.05	-	34.30	7.40	35.45
AV	5.7008G	97.98	Inf	-Inf	91.73	3	Horizontal	191	2.05	-	34.30	7.40	35.45
PK	5.7254G	67.58	68.20	-0.62	61.39	3	Horizontal	191	2.05	-	34.25	7.40	35.46

802.11a_Nss1,(6Mbps)_1TX

5700MHz_TnomVnom

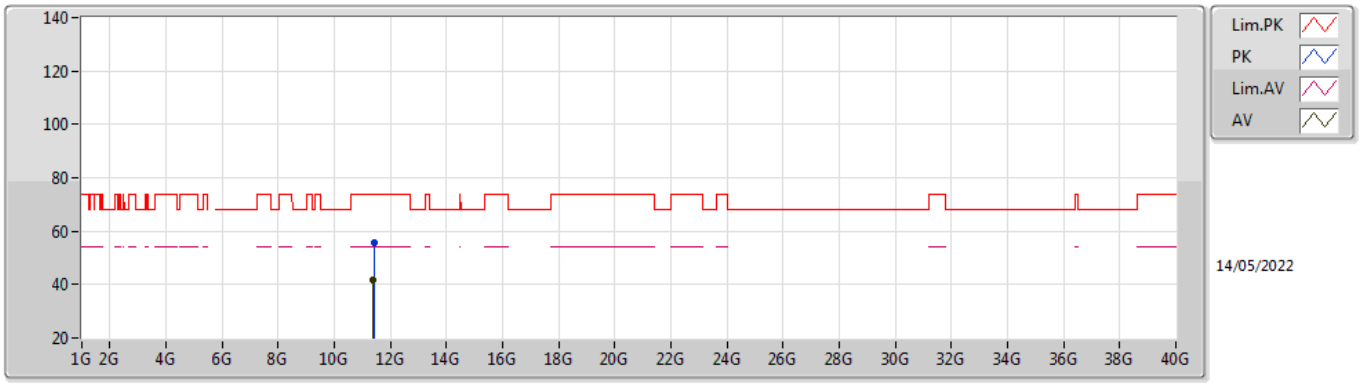


EUT X_1TX
Setting 15.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4084G	55.70	74.00	-18.30	41.67	3	Vertical	212	2.41	-	38.82	10.71	35.50
AV	11.38518G	41.64	54.00	-12.36	27.61	3	Vertical	212	2.41	-	38.79	10.71	35.47

802.11a_Nss1,(6Mbps)_1TX

5700MHz_TnomVnom

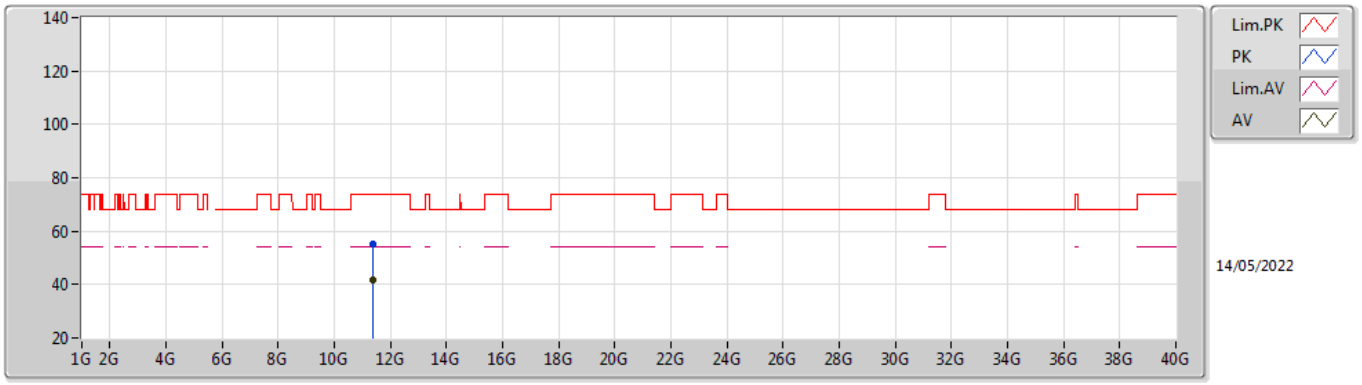


EUT X_1TX
Setting 15.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.39952G	55.14	74.00	-18.86	41.12	3	Horizontal	149	2.98	-	38.80	10.71	35.49
AV	11.38794G	41.63	54.00	-12.37	27.60	3	Horizontal	149	2.98	-	38.79	10.71	35.47

802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

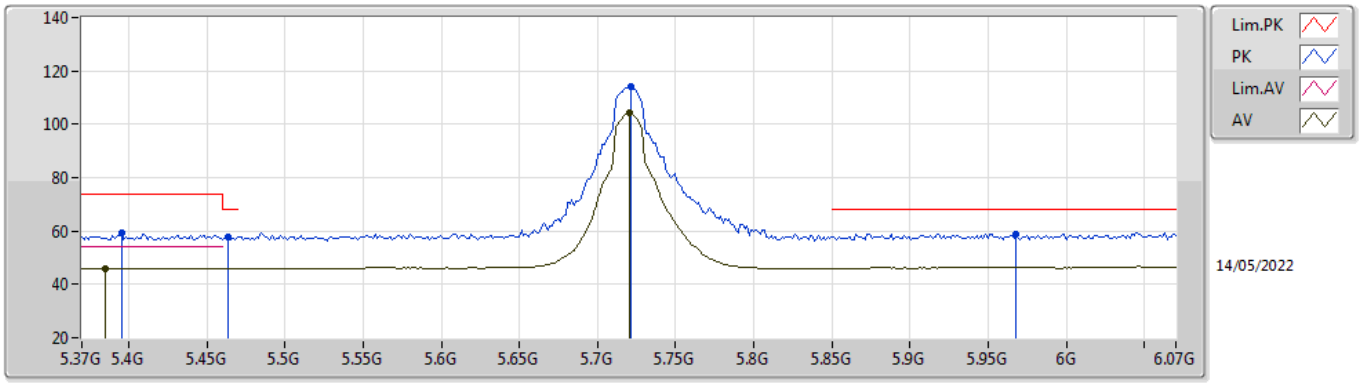


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3952G	59.24	74.00	-14.76	52.80	3	Vertical	326	2.08	-	34.59	7.20	35.35
AV	5.3854G	46.10	54.00	-7.90	39.68	3	Vertical	326	2.08	-	34.57	7.20	35.35
PK	5.4638G	57.53	68.20	-10.67	51.09	3	Vertical	326	2.08	-	34.53	7.26	35.35
PK	5.7214G	114.15	Inf	-Inf	107.95	3	Vertical	326	2.08	-	34.26	7.40	35.46
AV	5.72G	104.14	Inf	-Inf	97.94	3	Vertical	326	2.08	-	34.26	7.40	35.46
PK	5.9678G	59.00	68.20	-9.20	52.21	3	Vertical	326	2.08	-	34.80	7.57	35.58

802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

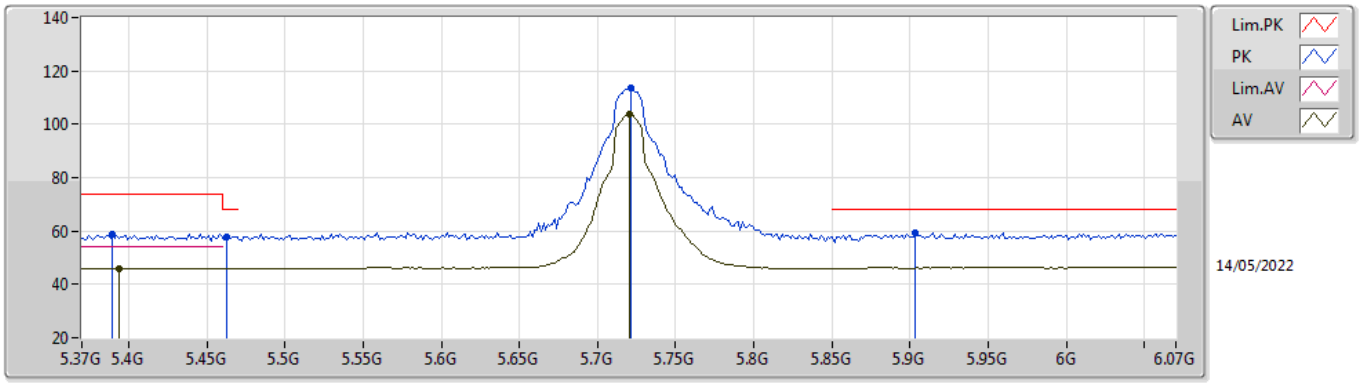


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3896G	58.67	74.00	-15.33	52.24	3	Horizontal	191	2.04	-	34.58	7.20	35.35
AV	5.3938G	46.08	54.00	-7.92	39.64	3	Horizontal	191	2.04	-	34.59	7.20	35.35
PK	5.4624G	57.99	68.20	-10.21	51.56	3	Horizontal	191	2.04	-	34.52	7.26	35.35
PK	5.7214G	113.38	Inf	-Inf	107.18	3	Horizontal	191	2.04	-	34.26	7.40	35.46
AV	5.72G	103.74	Inf	-Inf	97.54	3	Horizontal	191	2.04	-	34.26	7.40	35.46
PK	5.9034G	59.22	68.20	-8.98	52.66	3	Horizontal	191	2.04	-	34.61	7.50	35.55

802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

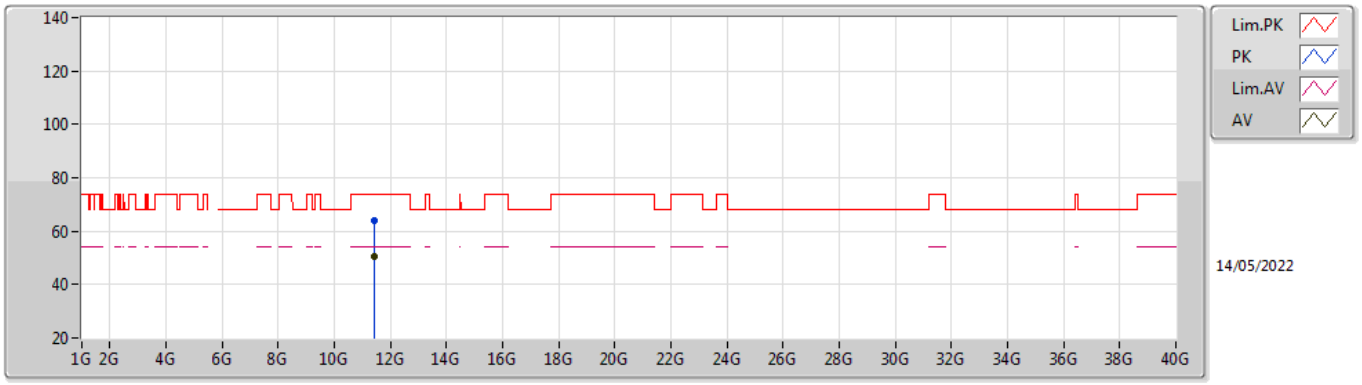


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.44168G	64.20	74.00	-9.80	50.13	3	Vertical	188	2.42	-	38.88	10.72	35.53
AV	11.43982G	50.64	54.00	-3.36	36.57	3	Vertical	188	2.42	-	38.88	10.72	35.53

802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

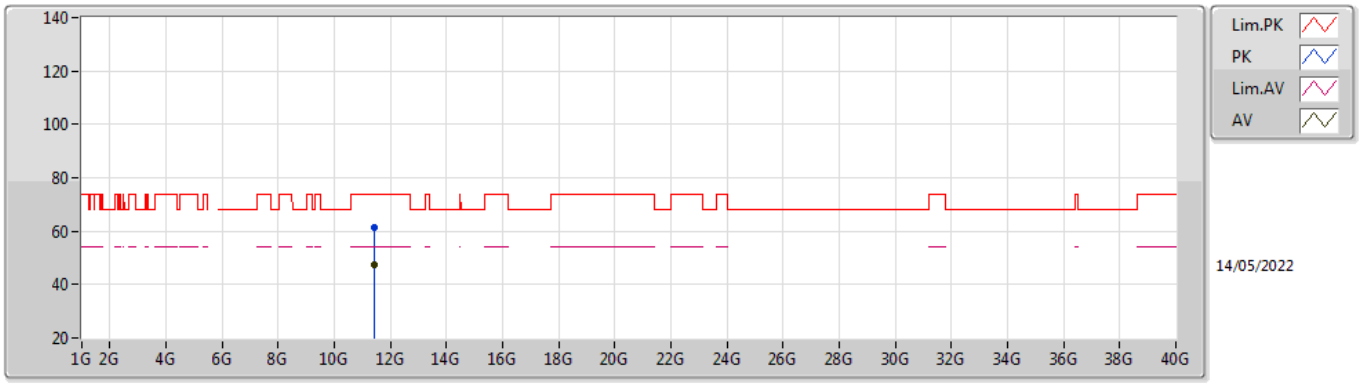


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4436G	61.23	74.00	-12.77	47.16	3	Horizontal	181	2.12	-	38.89	10.72	35.54
AV	11.44156G	47.62	54.00	-6.38	33.55	3	Horizontal	181	2.12	-	38.88	10.72	35.53

802.11a_Nss1,(6Mbps)_1TX

5745MHz_TnomVnom

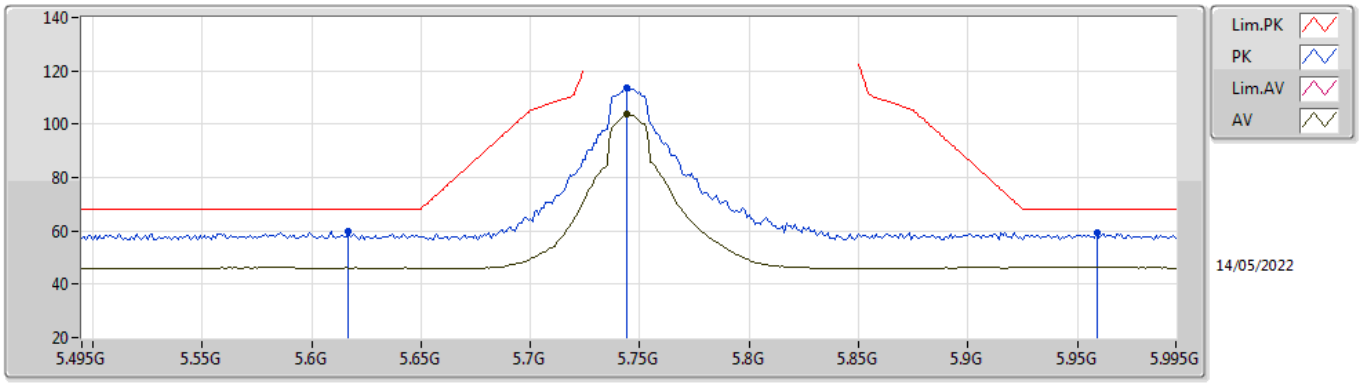


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.617G	59.95	68.20	-8.25	53.39	3	Vertical	327	1.99	-	34.57	7.40	35.41
PK	5.744G	113.62	Inf	-Inf	107.48	3	Vertical	327	1.99	-	34.21	7.40	35.47
AV	5.744G	103.56	Inf	-Inf	97.42	3	Vertical	327	1.99	-	34.21	7.40	35.47
PK	5.959G	59.15	68.20	-9.05	52.37	3	Vertical	327	1.99	-	34.80	7.56	35.58

802.11a_Nss1,(6Mbps)_1TX

5745MHz_TnomVnom

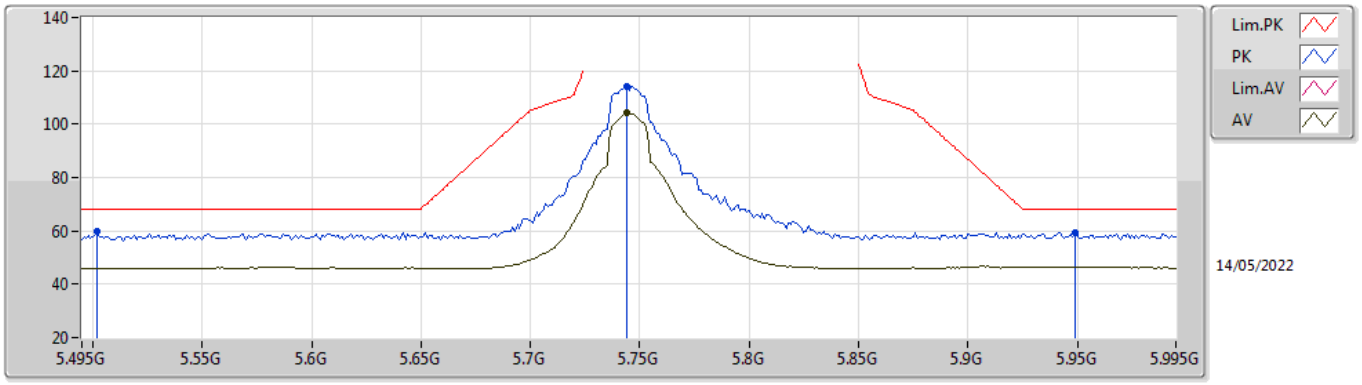


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.502G	59.77	68.20	-8.43	53.22	3	Horizontal	192	2.01	-	34.60	7.30	35.35
PK	5.744G	114.12	Inf	-Inf	107.98	3	Horizontal	192	2.01	-	34.21	7.40	35.47
AV	5.744G	104.17	Inf	-Inf	98.03	3	Horizontal	192	2.01	-	34.21	7.40	35.47
PK	5.949G	59.56	68.20	-8.64	52.78	3	Horizontal	192	2.01	-	34.80	7.55	35.57

802.11a_Nss1,(6Mbps)_1TX

5745MHz_TnomVnom

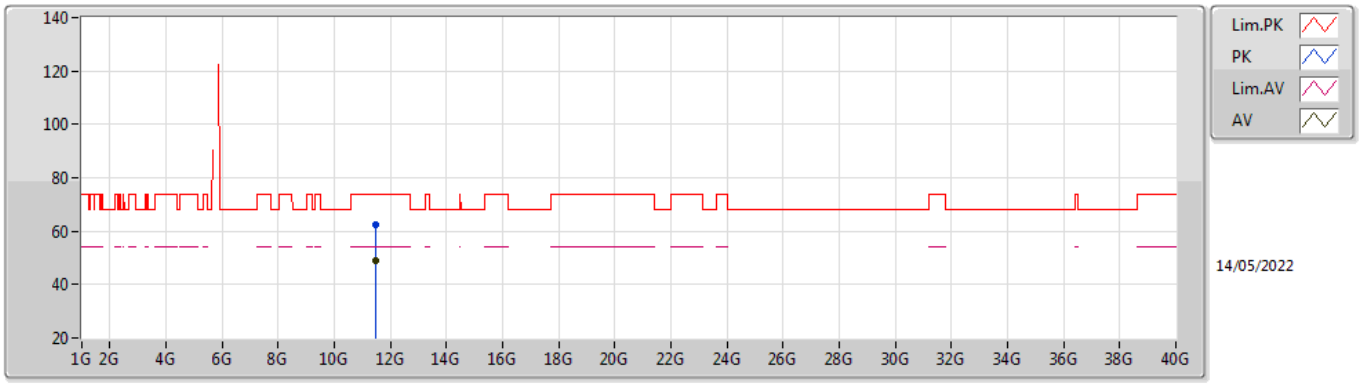


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.49366G	62.35	74.00	-11.65	48.23	3	Vertical	169	2.44	-	38.99	10.72	35.59
AV	11.49132G	48.86	54.00	-5.14	34.75	3	Vertical	169	2.44	-	38.98	10.72	35.59

802.11a_Nss1,(6Mbps)_1TX

5745MHz_TnomVnom

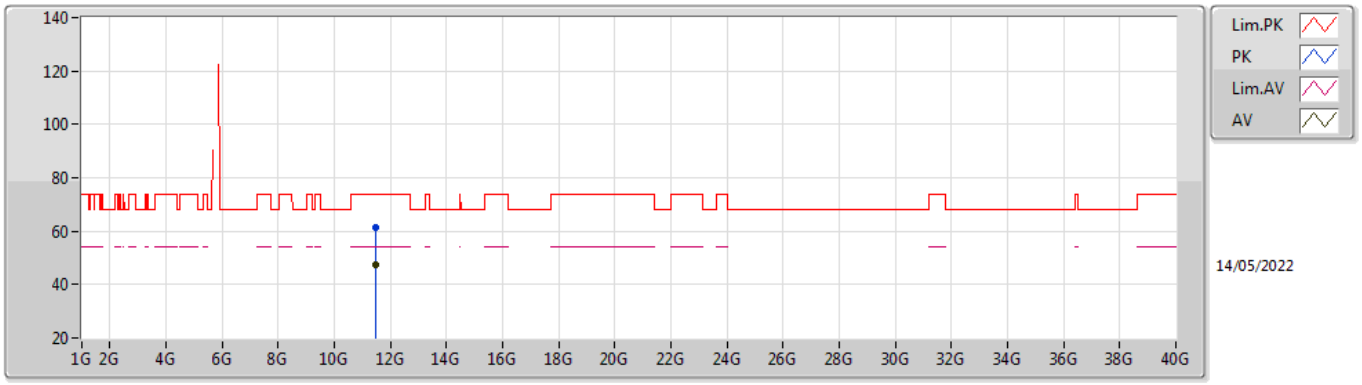


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.49228G	61.33	74.00	-12.67	47.22	3	Horizontal	185	1.97	-	38.98	10.72	35.59
AV	11.49156G	47.54	54.00	-6.46	33.43	3	Horizontal	185	1.97	-	38.98	10.72	35.59

802.11a_Nss1,(6Mbps)_1TX

5785MHz_TnomVnom

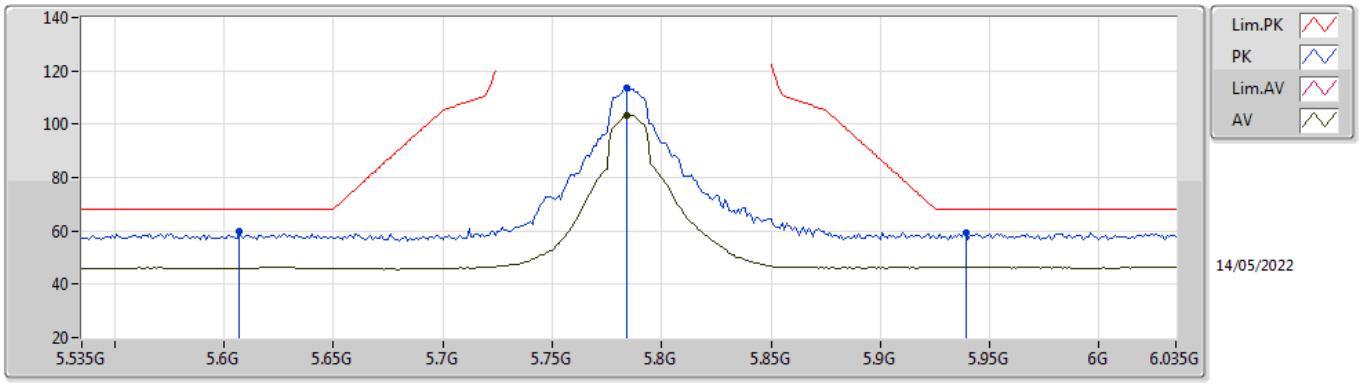


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.607G	59.59	68.20	-8.61	53.00	3	Vertical	334	2.05	-	34.59	7.40	35.40
PK	5.784G	113.44	Inf	-Inf	107.33	3	Vertical	334	2.05	-	34.20	7.40	35.49
AV	5.784G	103.44	Inf	-Inf	97.33	3	Vertical	334	2.05	-	34.20	7.40	35.49
PK	5.939G	59.21	68.20	-8.99	52.48	3	Vertical	334	2.05	-	34.76	7.54	35.57

802.11a_Nss1,(6Mbps)_1TX

5785MHz_TnomVnom

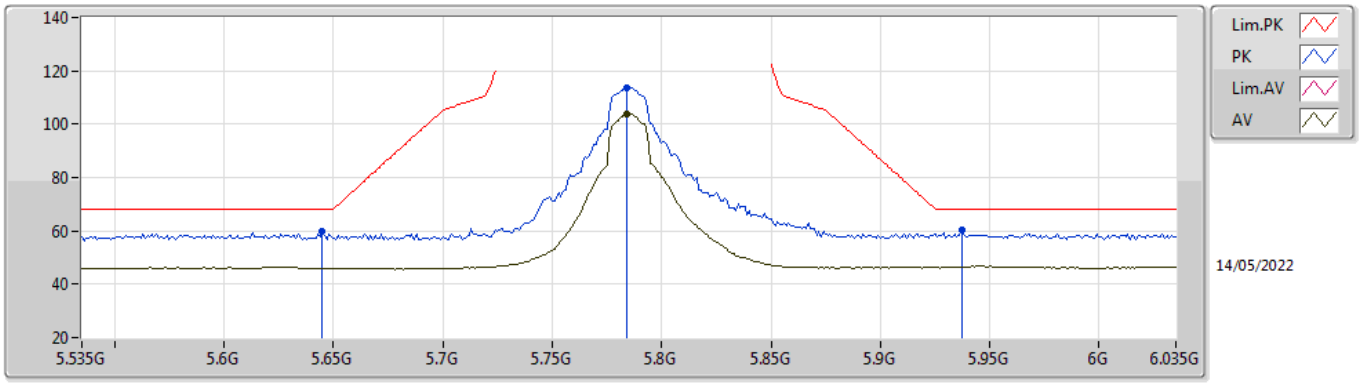


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.645G	59.57	68.20	-8.63	53.08	3	Horizontal	194	2.08	-	34.51	7.40	35.42
PK	5.784G	113.81	Inf	-Inf	107.70	3	Horizontal	194	2.08	-	34.20	7.40	35.49
AV	5.784G	103.86	Inf	-Inf	97.75	3	Horizontal	194	2.08	-	34.20	7.40	35.49
PK	5.937G	60.33	68.20	-7.87	53.61	3	Horizontal	194	2.08	-	34.75	7.54	35.57

802.11a_Nss1,(6Mbps)_1TX

5785MHz_TnomVnom

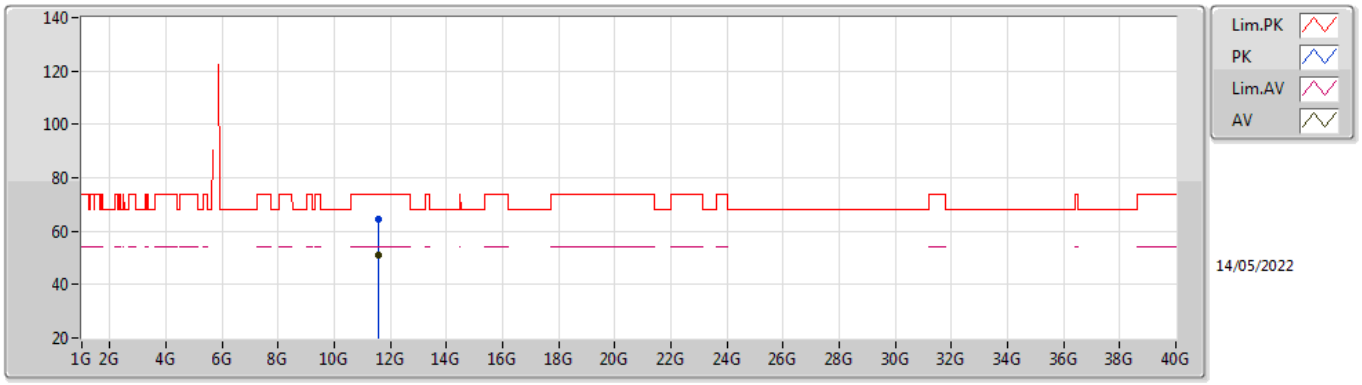


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.56772G	64.57	74.00	-9.43	50.15	3	Vertical	187	2.54	-	39.27	10.74	35.59
AV	11.56982G	51.03	54.00	-2.97	36.59	3	Vertical	187	2.54	-	39.28	10.74	35.58

802.11a_Nss1,(6Mbps)_1TX

5785MHz_TnomVnom

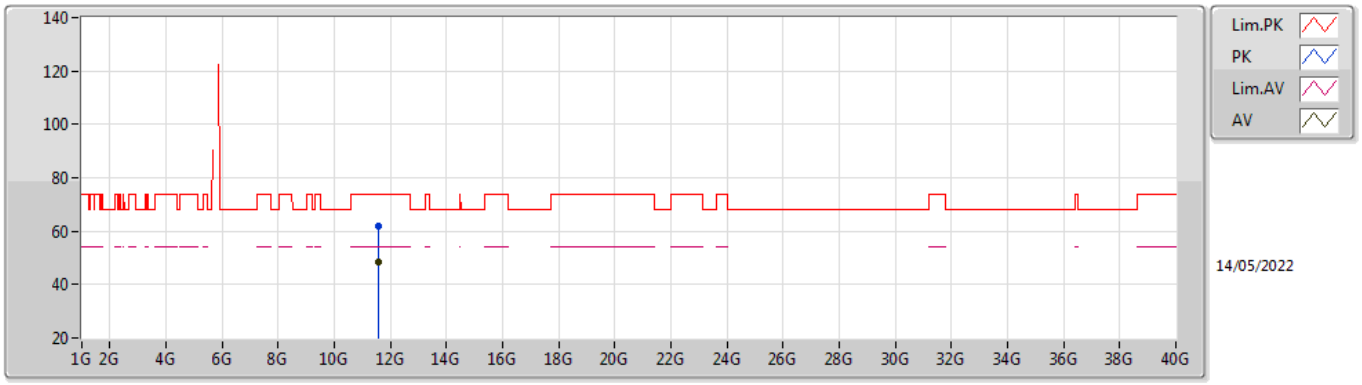


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.57084G	61.97	74.00	-12.03	47.53	3	Horizontal	182	2.12	-	39.28	10.74	35.58
AV	11.57156G	48.36	54.00	-5.64	33.91	3	Horizontal	182	2.12	-	39.29	10.74	35.58

802.11a_Nss1,(6Mbps)_1TX

5825MHz_TnomVnom

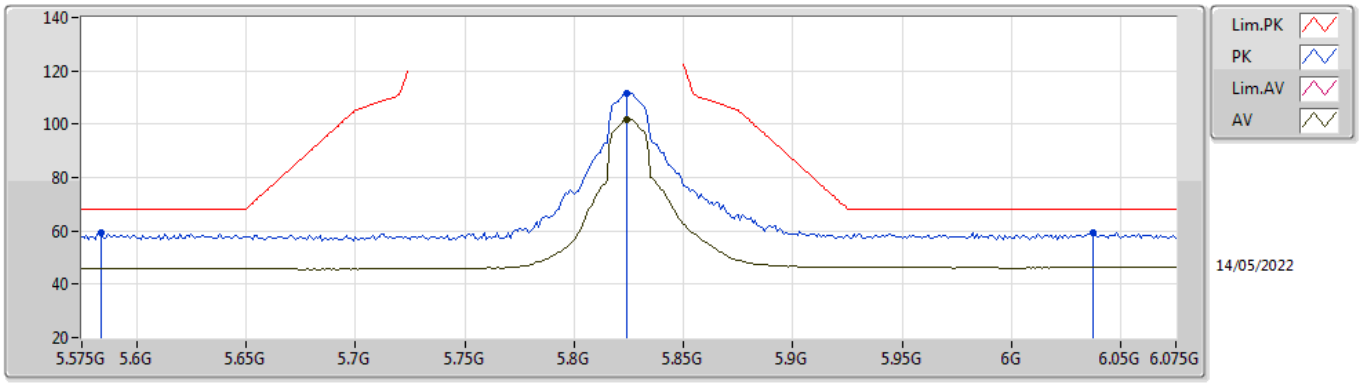


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.584G	59.17	68.20	-9.03	52.58	3	Vertical	280	1.80	-	34.60	7.38	35.39
PK	5.824G	111.66	Inf	-Inf	105.50	3	Vertical	280	1.80	-	34.25	7.42	35.51
AV	5.824G	101.77	Inf	-Inf	95.61	3	Vertical	280	1.80	-	34.25	7.42	35.51
PK	6.037G	59.42	68.20	-8.78	52.52	3	Vertical	280	1.80	-	34.87	7.62	35.59

802.11a_Nss1,(6Mbps)_1TX

5825MHz_TnomVnom

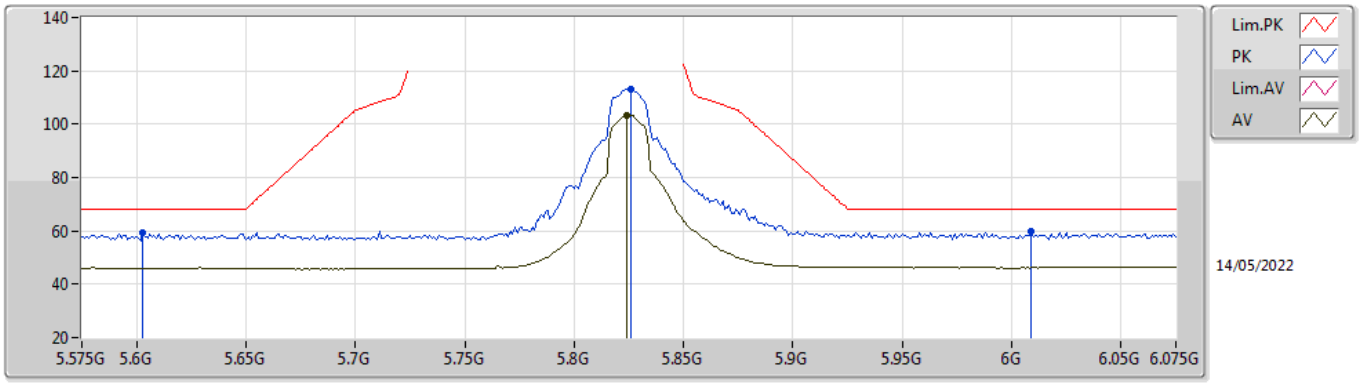


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.603G	59.20	68.20	-9.00	52.61	3	Horizontal	190	1.98	-	34.59	7.40	35.40
PK	5.826G	113.12	Inf	-Inf	106.95	3	Horizontal	190	1.98	-	34.25	7.43	35.51
AV	5.824G	103.50	Inf	-Inf	97.34	3	Horizontal	190	1.98	-	34.25	7.42	35.51
PK	6.009G	59.83	68.20	-8.37	53.01	3	Horizontal	190	1.98	-	34.82	7.60	35.60

802.11a_Nss1,(6Mbps)_1TX

5825MHz_TnomVnom

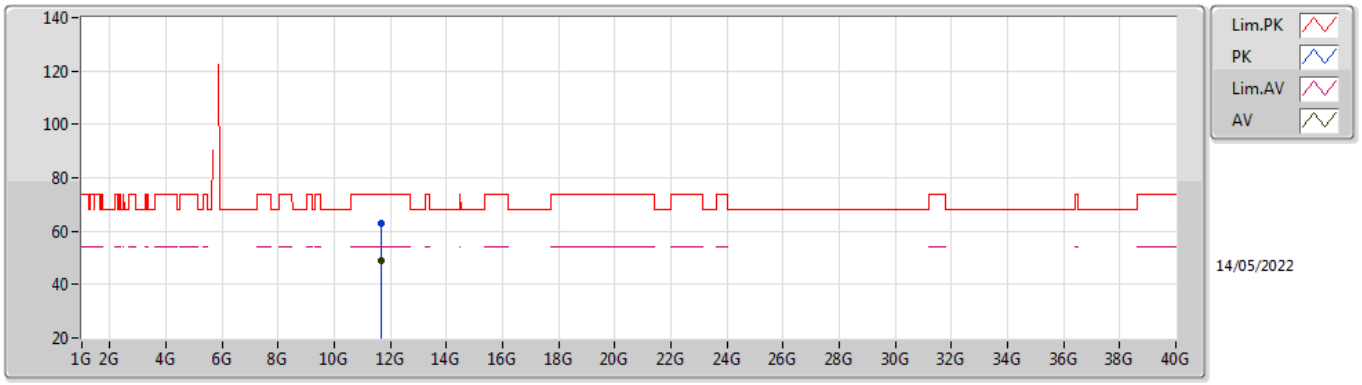


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65216G	63.17	74.00	-10.83	48.59	3	Vertical	161	2.37	-	39.40	10.75	35.57
AV	11.65108G	48.80	54.00	-5.20	34.22	3	Vertical	161	2.37	-	39.40	10.75	35.57

802.11a_Nss1,(6Mbps)_1TX

5825MHz_TnomVnom

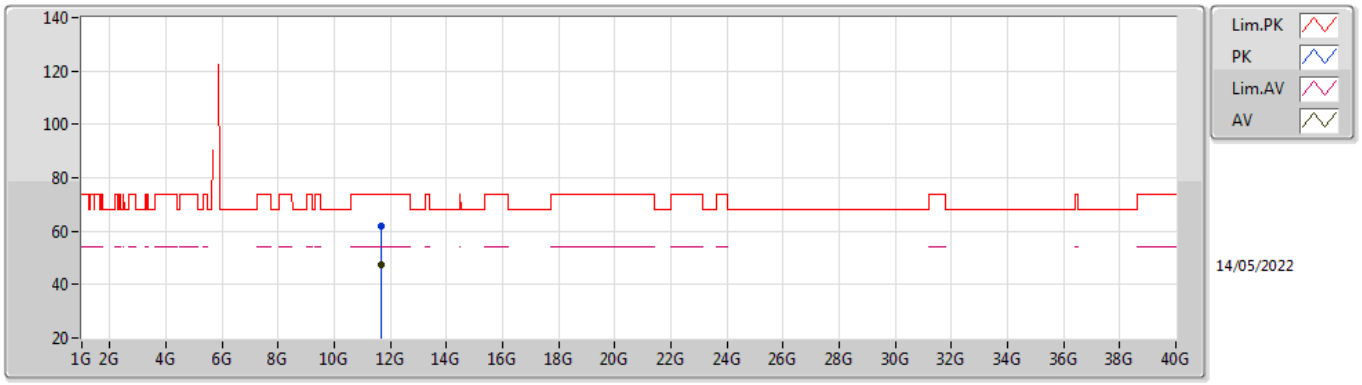


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65324G	61.72	74.00	-12.28	47.14	3	Horizontal	186	2.03	-	39.40	10.75	35.57
AV	11.65168G	47.65	54.00	-6.35	33.07	3	Horizontal	186	2.03	-	39.40	10.75	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

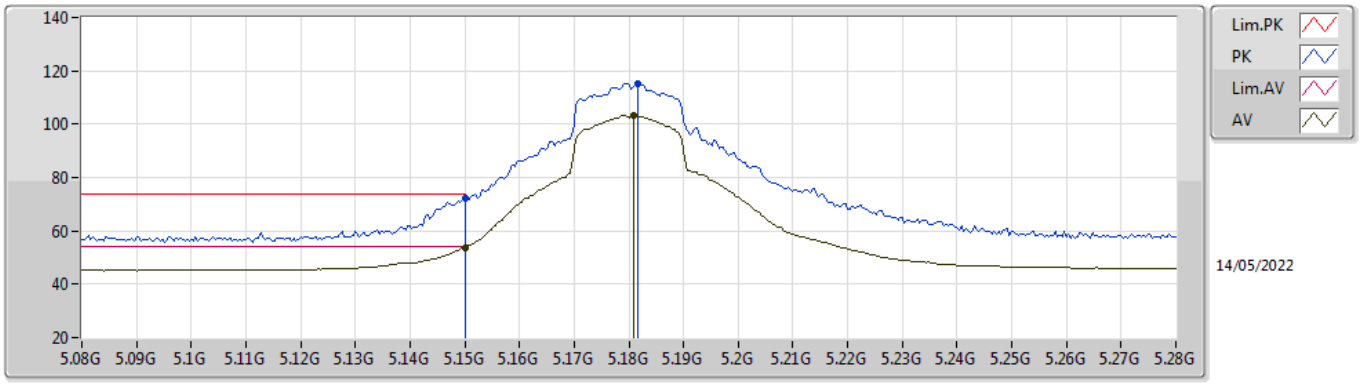


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	72.02	74.00	-1.98	66.19	3	Vertical	308	2.05	-	34.00	7.17	35.34
AV	5.15G	53.81	54.00	-0.19	47.98	3	Vertical	308	2.05	-	34.00	7.17	35.34
PK	5.1816G	115.21	Inf	-Inf	109.23	3	Vertical	308	2.05	-	34.13	7.19	35.34
AV	5.1808G	103.36	Inf	-Inf	97.39	3	Vertical	308	2.05	-	34.12	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

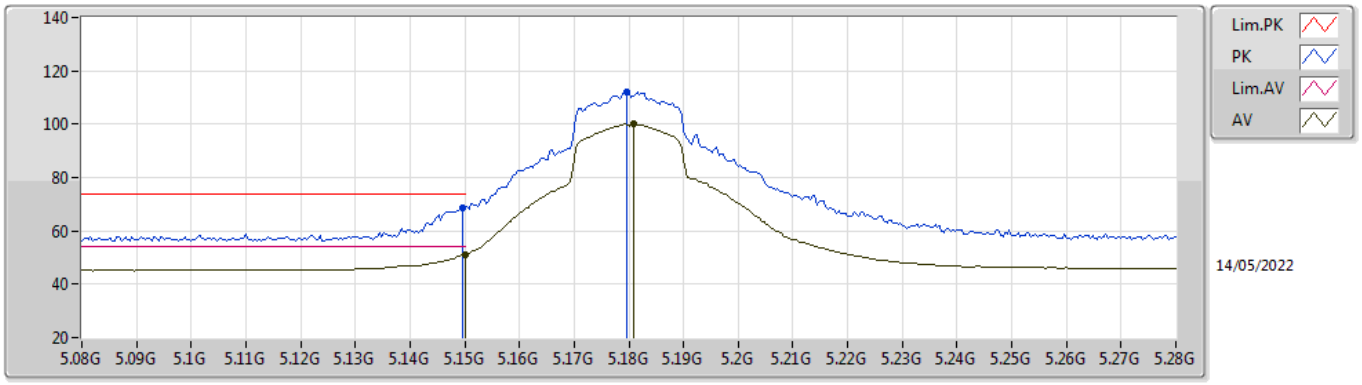


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1496G	68.57	74.00	-5.43	62.74	3	Horizontal	202	2.16	-	34.00	7.17	35.34
AV	5.15G	51.11	54.00	-2.89	45.28	3	Horizontal	202	2.16	-	34.00	7.17	35.34
PK	5.1796G	112.07	Inf	-Inf	106.10	3	Horizontal	202	2.16	-	34.12	7.19	35.34
AV	5.1808G	100.15	Inf	-Inf	94.18	3	Horizontal	202	2.16	-	34.12	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

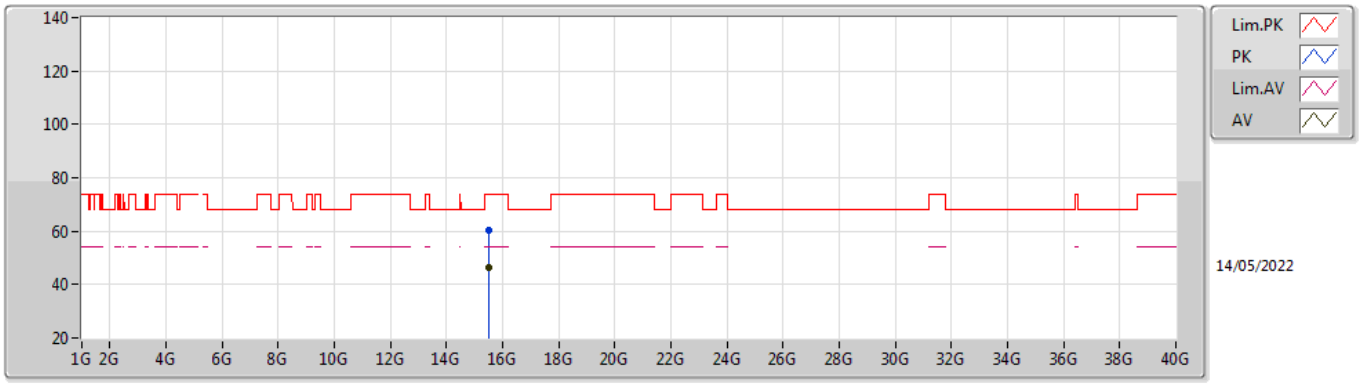


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.52506G	60.52	74.00	-13.48	44.23	3	Vertical	52	2.28	-	38.52	13.16	35.39
AV	15.5283G	46.63	54.00	-7.37	30.36	3	Vertical	52	2.28	-	38.50	13.16	35.39

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

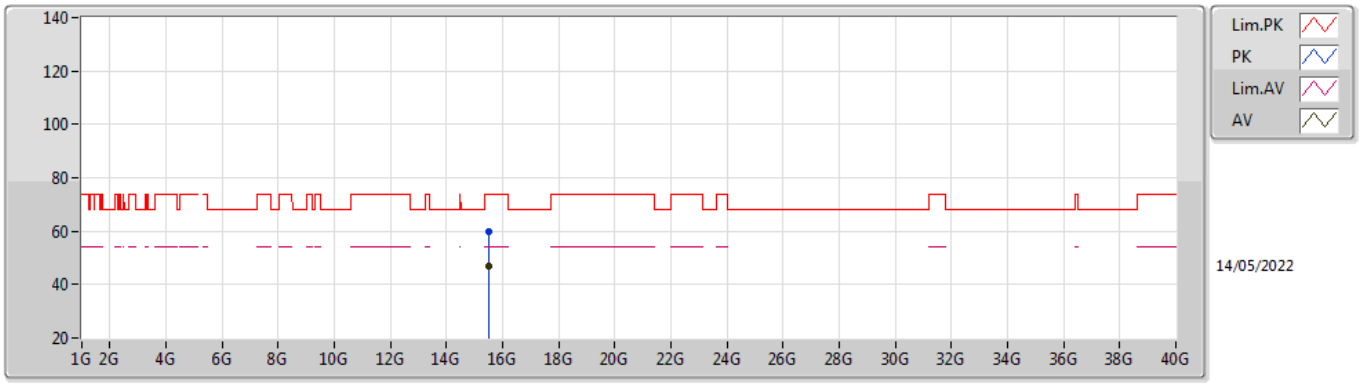


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.52512G	59.94	74.00	-14.06	43.65	3	Horizontal	266	1.16	-	38.52	13.16	35.39
AV	15.52578G	46.66	54.00	-7.34	30.37	3	Horizontal	266	1.16	-	38.52	13.16	35.39

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

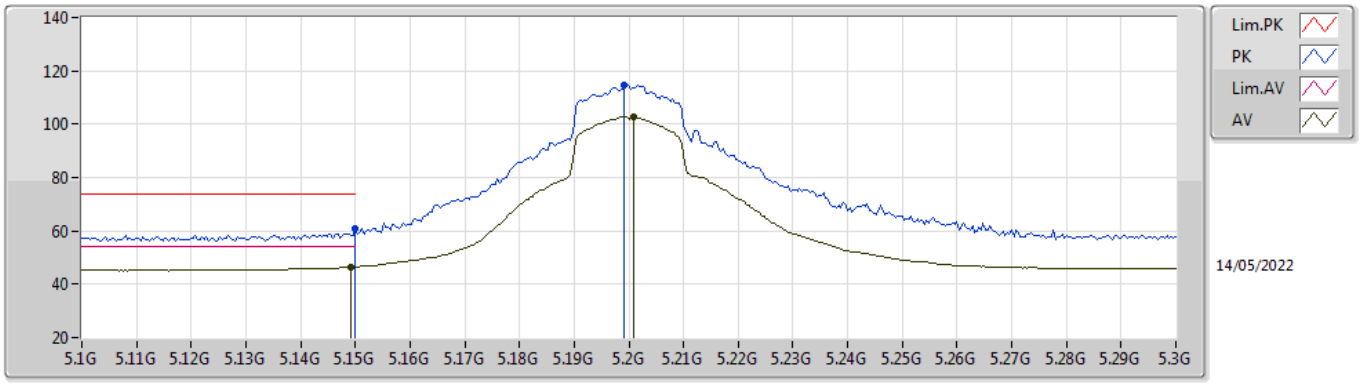


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	60.80	74.00	-13.20	54.97	3	Vertical	77	1.78	-	34.00	7.17	35.34
AV	5.1492G	46.46	54.00	-7.54	40.63	3	Vertical	77	1.78	-	34.00	7.17	35.34
PK	5.1992G	114.68	Inf	-Inf	108.62	3	Vertical	77	1.78	-	34.20	7.20	35.34
AV	5.2008G	102.81	Inf	-Inf	96.75	3	Vertical	77	1.78	-	34.20	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

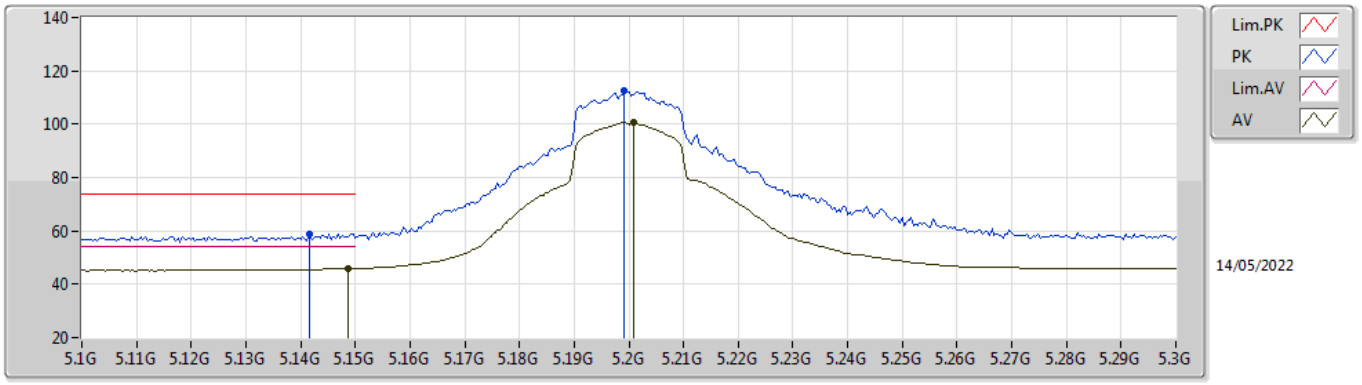


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1416G	58.74	74.00	-15.26	52.93	3	Horizontal	203	2.14	-	33.98	7.17	35.34
AV	5.1488G	45.94	54.00	-8.06	40.11	3	Horizontal	203	2.14	-	34.00	7.17	35.34
PK	5.1992G	112.49	Inf	-Inf	106.43	3	Horizontal	203	2.14	-	34.20	7.20	35.34
AV	5.2008G	100.47	Inf	-Inf	94.41	3	Horizontal	203	2.14	-	34.20	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

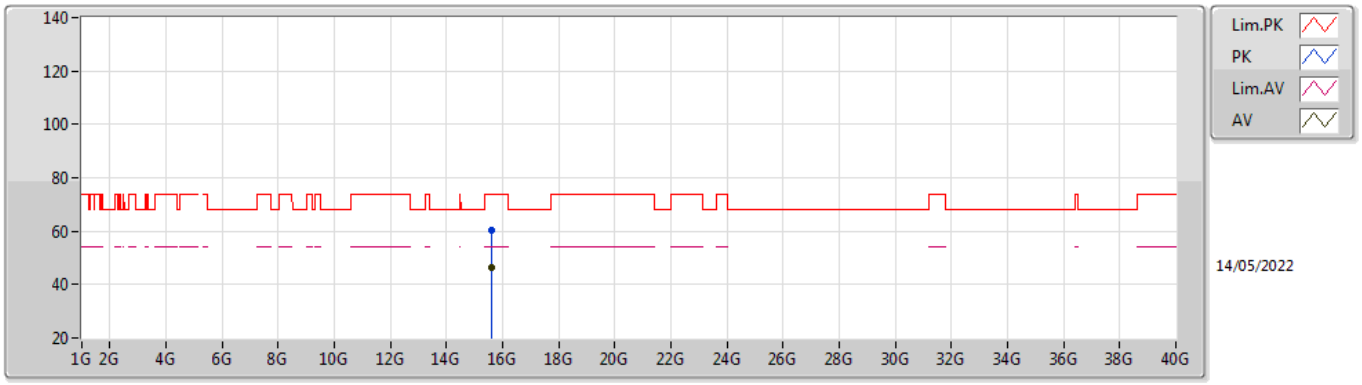


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.60438G	60.35	74.00	-13.65	44.63	3	Vertical	272	1.93	-	37.98	13.20	35.46
AV	15.585G	46.38	54.00	-7.62	30.52	3	Vertical	272	1.93	-	38.11	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

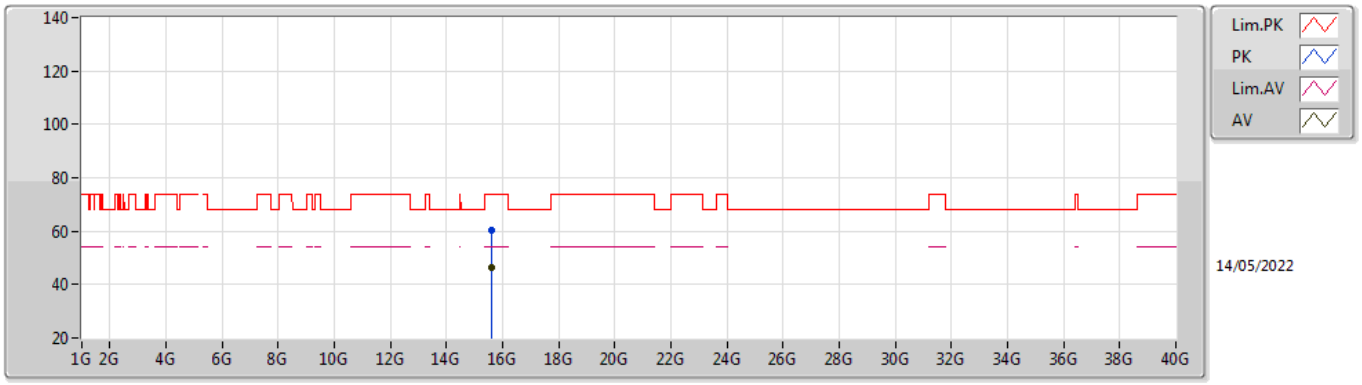


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.60432G	60.27	74.00	-13.73	44.55	3	Horizontal	71	1.44	-	37.98	13.20	35.46
AV	15.58566G	46.42	54.00	-7.58	30.57	3	Horizontal	71	1.44	-	38.10	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

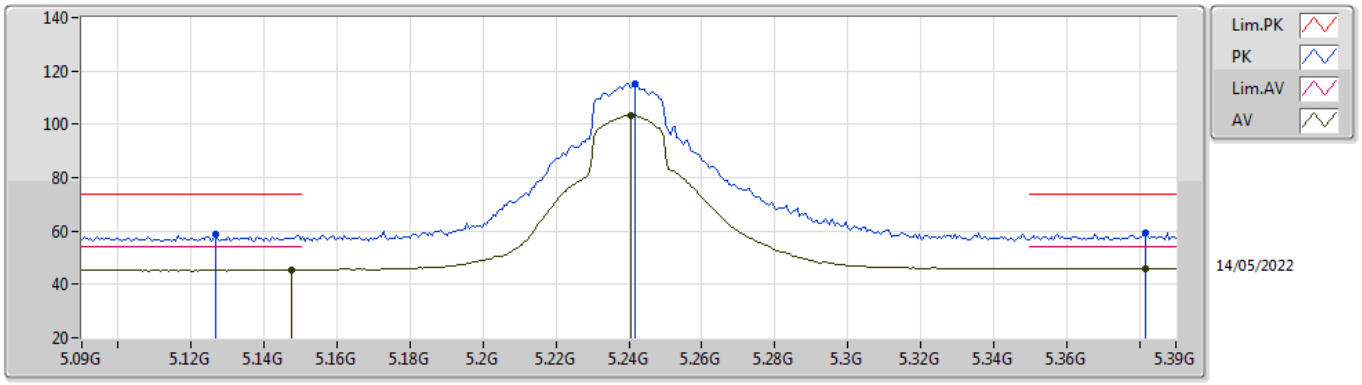


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1266G	58.66	74.00	-15.34	52.89	3	Vertical	304	2.12	-	33.95	7.16	35.34
AV	5.1476G	45.48	54.00	-8.52	39.65	3	Vertical	304	2.12	-	34.00	7.17	35.34
PK	5.2418G	115.31	Inf	-Inf	109.08	3	Vertical	304	2.12	-	34.37	7.20	35.34
AV	5.2406G	103.42	Inf	-Inf	97.20	3	Vertical	304	2.12	-	34.36	7.20	35.34
PK	5.3816G	59.39	74.00	-14.61	52.98	3	Vertical	304	2.12	-	34.56	7.20	35.35
AV	5.3816G	45.99	54.00	-8.01	39.58	3	Vertical	304	2.12	-	34.56	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

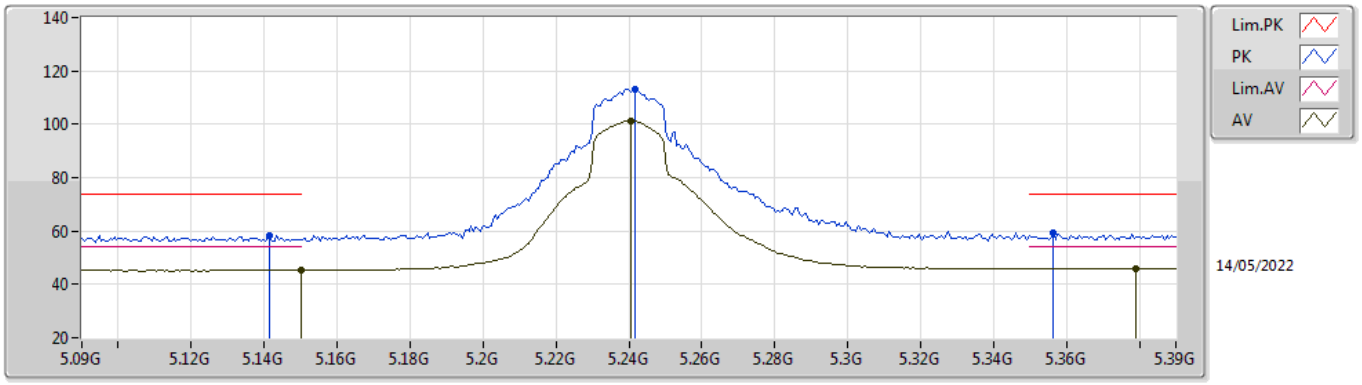


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1416G	58.28	74.00	-15.72	52.47	3	Horizontal	201	1.99	-	33.98	7.17	35.34
AV	5.15G	45.38	54.00	-8.62	39.55	3	Horizontal	201	1.99	-	34.00	7.17	35.34
PK	5.2418G	113.16	Inf	-Inf	106.93	3	Horizontal	201	1.99	-	34.37	7.20	35.34
AV	5.2406G	101.38	Inf	-Inf	95.16	3	Horizontal	201	1.99	-	34.36	7.20	35.34
PK	5.3564G	59.46	74.00	-14.54	53.09	3	Horizontal	201	1.99	-	34.51	7.20	35.34
AV	5.3792G	45.93	54.00	-8.07	39.52	3	Horizontal	201	1.99	-	34.56	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

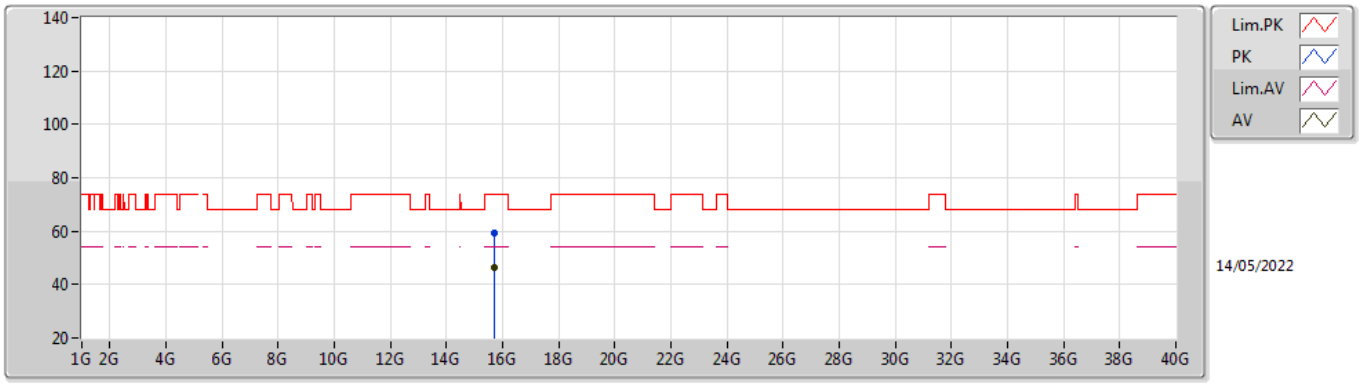


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.70686G	59.37	74.00	-14.63	44.13	3	Vertical	227	1.01	-	37.53	13.25	35.54
AV	15.71736G	46.21	54.00	-7.79	30.93	3	Vertical	227	1.01	-	37.57	13.26	35.55

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

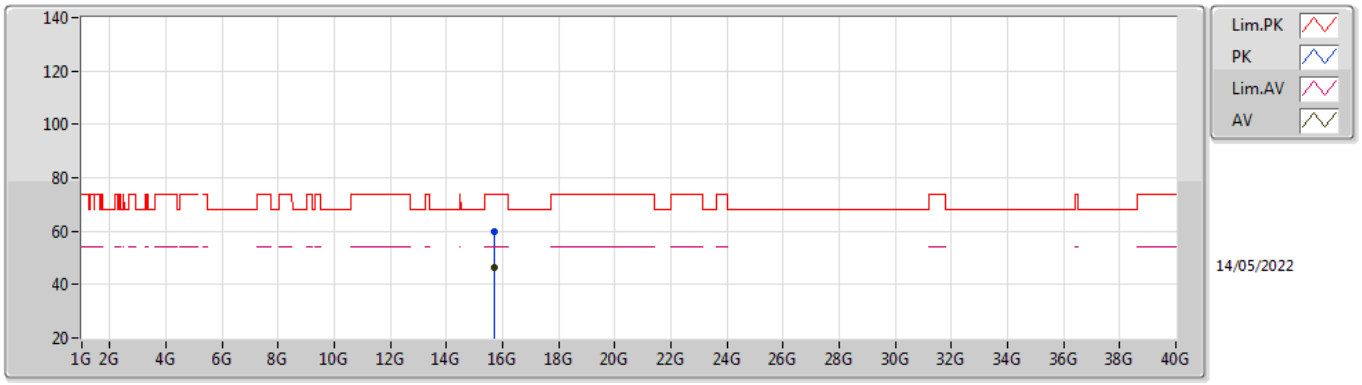


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.72288G	59.77	74.00	-14.23	44.48	3	Horizontal	334	2.09	-	37.59	13.26	35.56
AV	15.71802G	46.22	54.00	-7.78	30.94	3	Horizontal	334	2.09	-	37.57	13.26	35.55

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

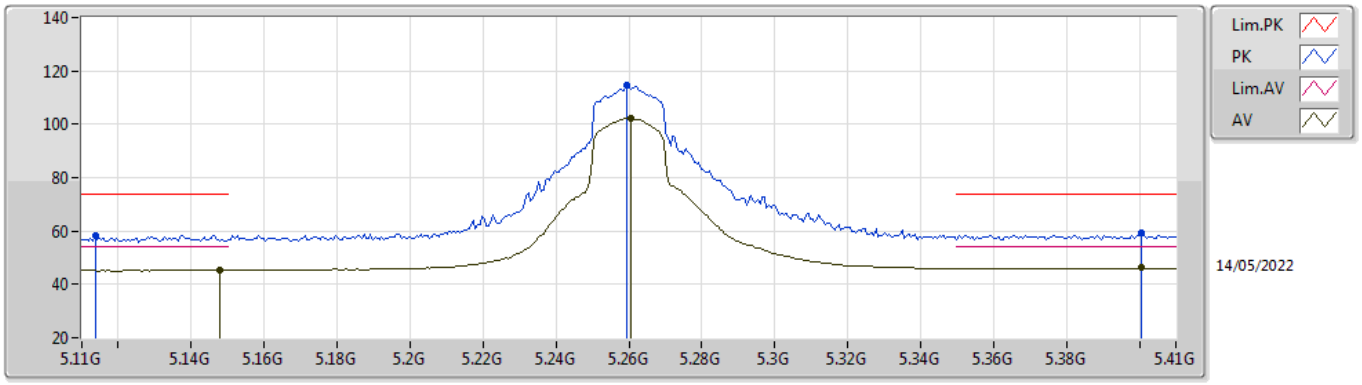


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1136G	58.50	74.00	-15.50	52.74	3	Vertical	75	1.02	-	33.93	7.16	35.33
AV	5.1478G	45.41	54.00	-8.59	39.58	3	Vertical	75	1.02	-	34.00	7.17	35.34
PK	5.2594G	114.87	Inf	-Inf	108.59	3	Vertical	75	1.02	-	34.42	7.20	35.34
AV	5.2606G	102.33	Inf	-Inf	96.05	3	Vertical	75	1.02	-	34.42	7.20	35.34
PK	5.4004G	59.10	74.00	-14.90	52.65	3	Vertical	75	1.02	-	34.60	7.20	35.35
AV	5.4004G	46.15	54.00	-7.85	39.70	3	Vertical	75	1.02	-	34.60	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

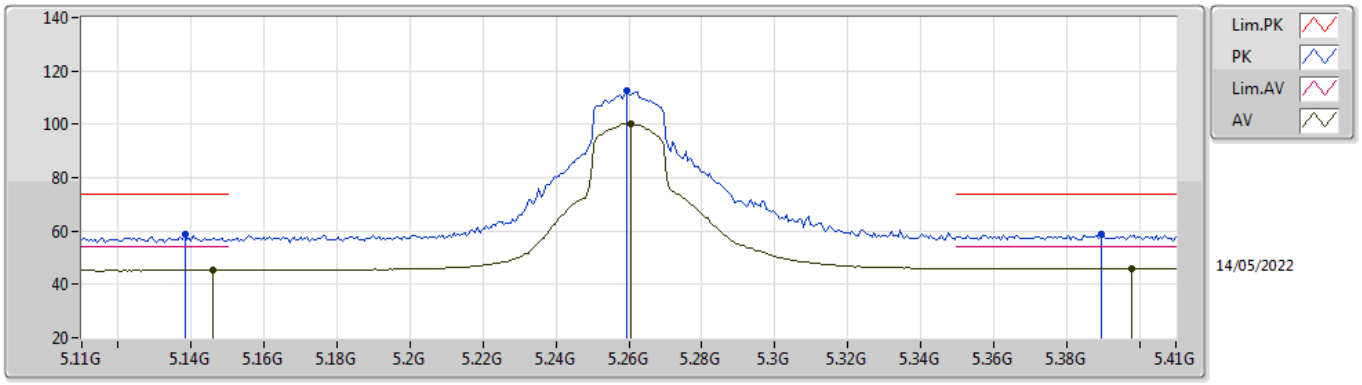


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1382G	58.67	74.00	-15.33	52.86	3	Horizontal	201	2.18	-	33.98	7.17	35.34
AV	5.146G	45.35	54.00	-8.65	39.53	3	Horizontal	201	2.18	-	33.99	7.17	35.34
PK	5.2594G	112.75	Inf	-Inf	106.47	3	Horizontal	201	2.18	-	34.42	7.20	35.34
AV	5.2606G	100.27	Inf	-Inf	93.99	3	Horizontal	201	2.18	-	34.42	7.20	35.34
PK	5.3896G	58.54	74.00	-15.46	52.11	3	Horizontal	201	2.18	-	34.58	7.20	35.35
AV	5.398G	46.06	54.00	-7.94	39.61	3	Horizontal	201	2.18	-	34.60	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

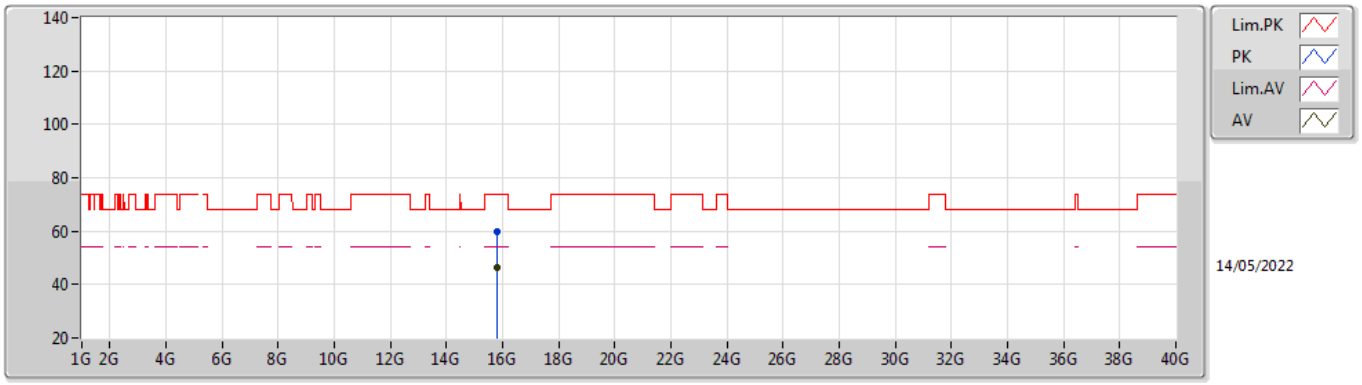


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.78336G	60.00	74.00	-14.00	44.49	3	Vertical	145	2.26	-	37.83	13.29	35.61
AV	15.79026G	46.48	54.00	-7.52	30.93	3	Vertical	145	2.26	-	37.86	13.30	35.61

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

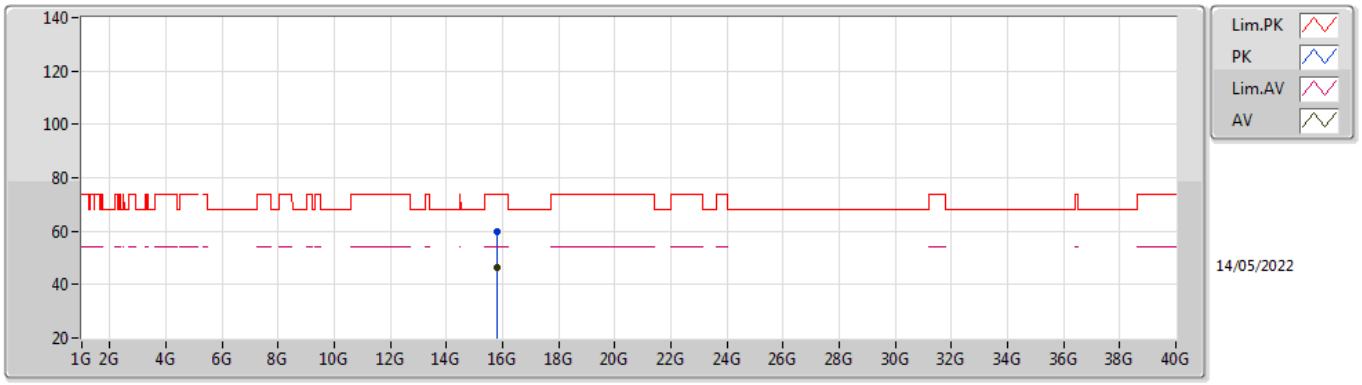


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.78306G	59.75	74.00	-14.25	44.24	3	Horizontal	59	1.36	-	37.83	13.29	35.61
AV	15.7842G	46.54	54.00	-7.46	31.02	3	Horizontal	59	1.36	-	37.84	13.29	35.61

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

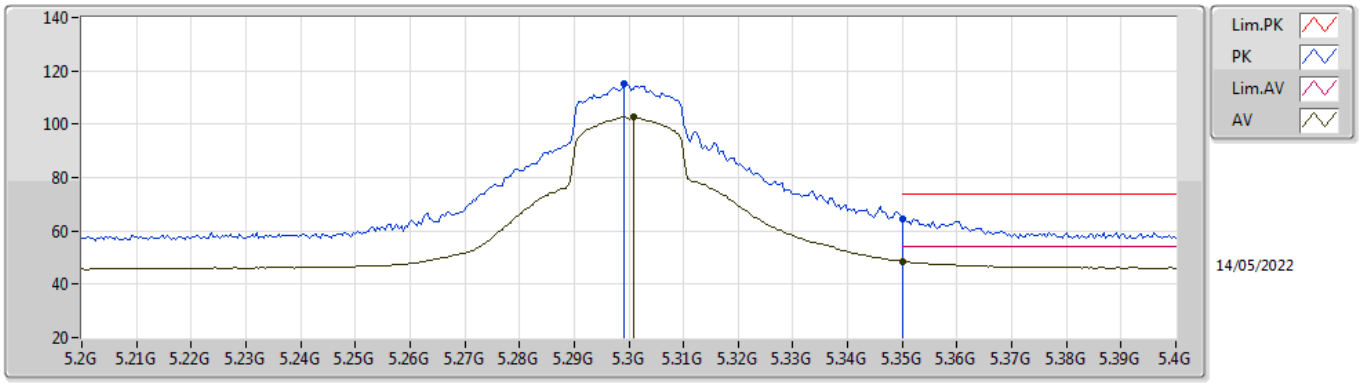


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2992G	114.98	Inf	-Inf	108.62	3	Vertical	312	1.97	-	34.50	7.20	35.34
AV	5.3008G	102.57	Inf	-Inf	96.21	3	Vertical	312	1.97	-	34.50	7.20	35.34
PK	5.35G	64.74	74.00	-9.26	58.38	3	Vertical	312	1.97	-	34.50	7.20	35.34
AV	5.35G	48.42	54.00	-5.58	42.06	3	Vertical	312	1.97	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

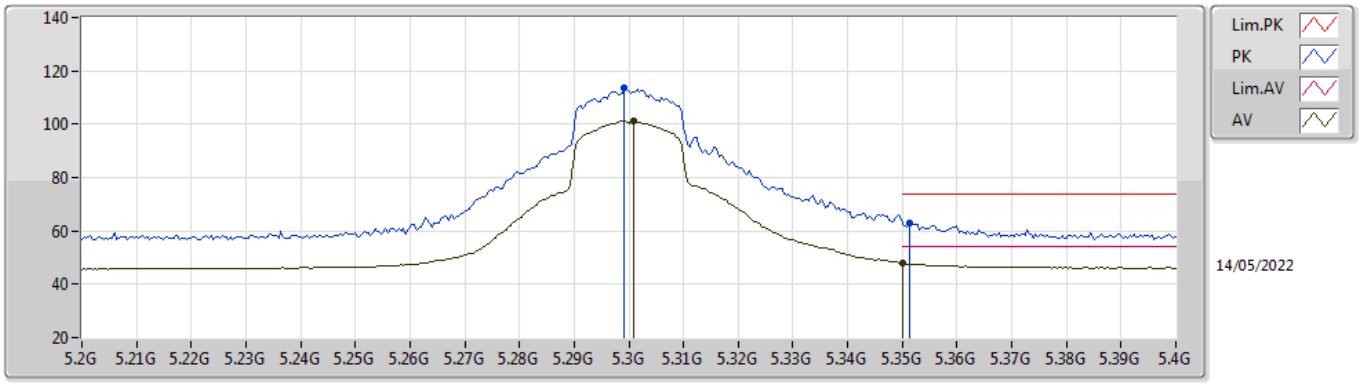


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2992G	113.52	Inf	-Inf	107.16	3	Horizontal	200	1.97	-	34.50	7.20	35.34
AV	5.3008G	101.15	Inf	-Inf	94.79	3	Horizontal	200	1.97	-	34.50	7.20	35.34
PK	5.3512G	62.97	74.00	-11.03	56.61	3	Horizontal	200	1.97	-	34.50	7.20	35.34
AV	5.35G	47.83	54.00	-6.17	41.47	3	Horizontal	200	1.97	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

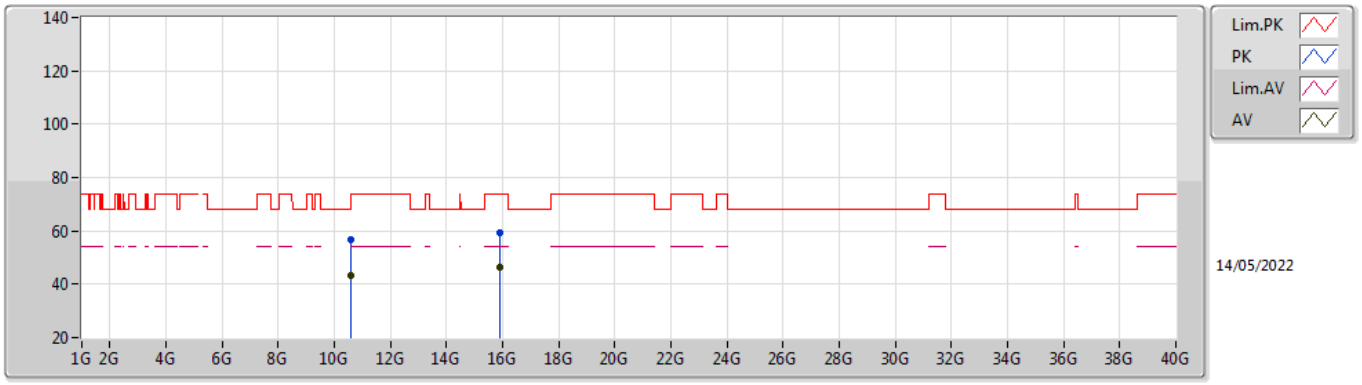


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60177G	56.61	74.00	-17.39	43.20	3	Vertical	357	1.80	-	38.20	10.59	35.38
AV	10.6024G	43.53	54.00	-10.47	30.12	3	Vertical	357	1.80	-	38.20	10.59	35.38
PK	15.88518G	59.50	74.00	-14.50	44.21	3	Vertical	15	1.37	-	37.64	13.34	35.69
AV	15.89004G	46.30	54.00	-7.70	31.02	3	Vertical	15	1.37	-	37.63	13.35	35.70

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

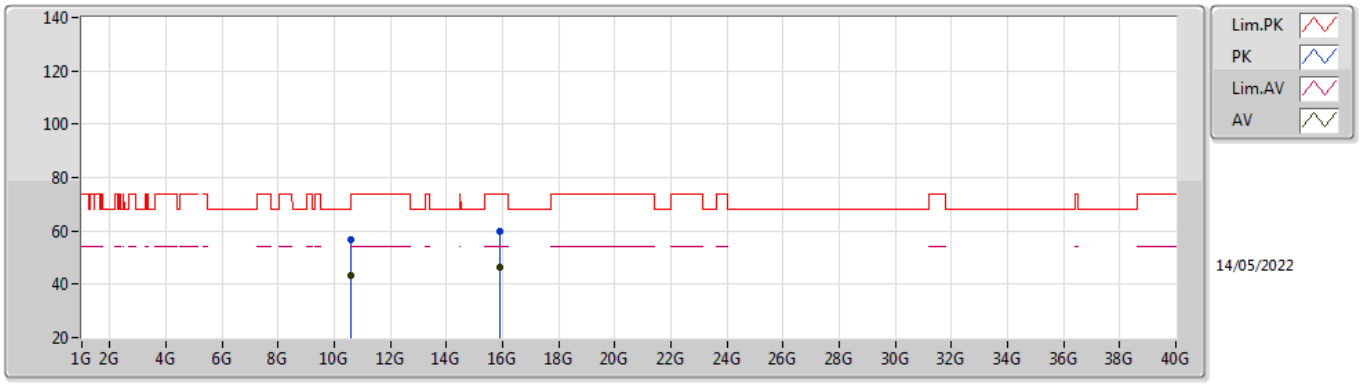


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60189G	56.61	74.00	-17.39	43.20	3	Horizontal	98	2.38	-	38.20	10.59	35.38
AV	10.6021G	43.38	54.00	-10.62	29.97	3	Horizontal	98	2.38	-	38.20	10.59	35.38
PK	15.89538G	59.67	74.00	-14.33	44.41	3	Horizontal	193	2.35	-	37.61	13.35	35.70
AV	15.8919G	46.34	54.00	-7.66	31.07	3	Horizontal	193	2.35	-	37.62	13.35	35.70

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

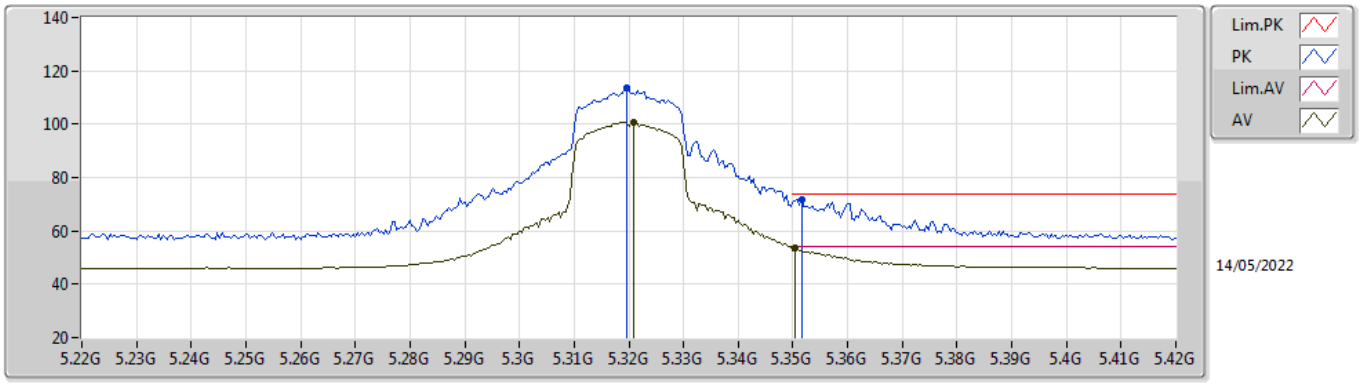


EUT X_1TX
Setting 18.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3196G	113.48	Inf	-Inf	107.12	3	Vertical	312	2.00	-	34.50	7.20	35.34
AV	5.3208G	100.62	Inf	-Inf	94.26	3	Vertical	312	2.00	-	34.50	7.20	35.34
PK	5.3516G	71.82	74.00	-2.18	65.46	3	Vertical	312	2.00	-	34.50	7.20	35.34
AV	5.3504G	53.57	54.00	-0.43	47.21	3	Vertical	312	2.00	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

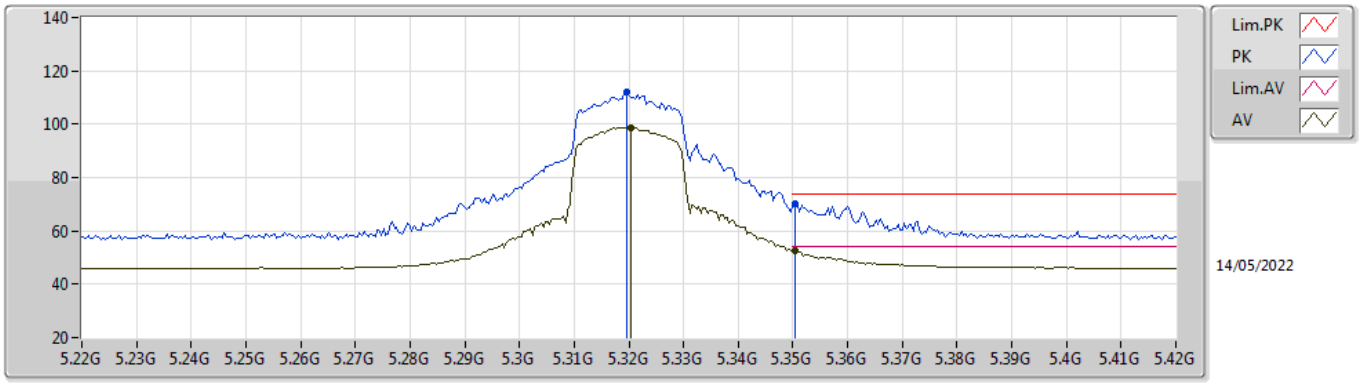


EUT X_1TX
Setting 18.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3196G	111.91	Inf	-Inf	105.55	3	Horizontal	201	1.96	-	34.50	7.20	35.34
AV	5.3204G	98.84	Inf	-Inf	92.48	3	Horizontal	201	1.96	-	34.50	7.20	35.34
PK	5.3504G	70.00	74.00	-4.00	63.64	3	Horizontal	201	1.96	-	34.50	7.20	35.34
AV	5.3504G	52.40	54.00	-1.60	46.04	3	Horizontal	201	1.96	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

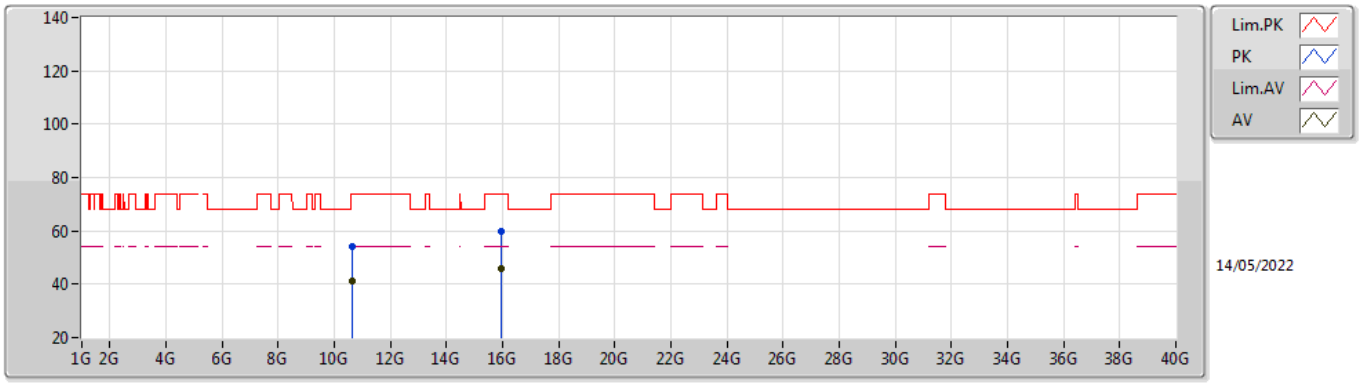


EUT X_1TX
Setting 18.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.64966G	54.21	74.00	-19.79	40.65	3	Vertical	182	1.35	-	38.30	10.60	35.34
AV	10.6484G	41.01	54.00	-12.99	27.45	3	Vertical	182	1.35	-	38.30	10.60	35.34
PK	15.96114G	59.58	74.00	-14.42	44.48	3	Vertical	177	1.12	-	37.48	13.38	35.76
AV	15.96264G	45.87	54.00	-8.13	30.78	3	Vertical	177	1.12	-	37.47	13.38	35.76

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

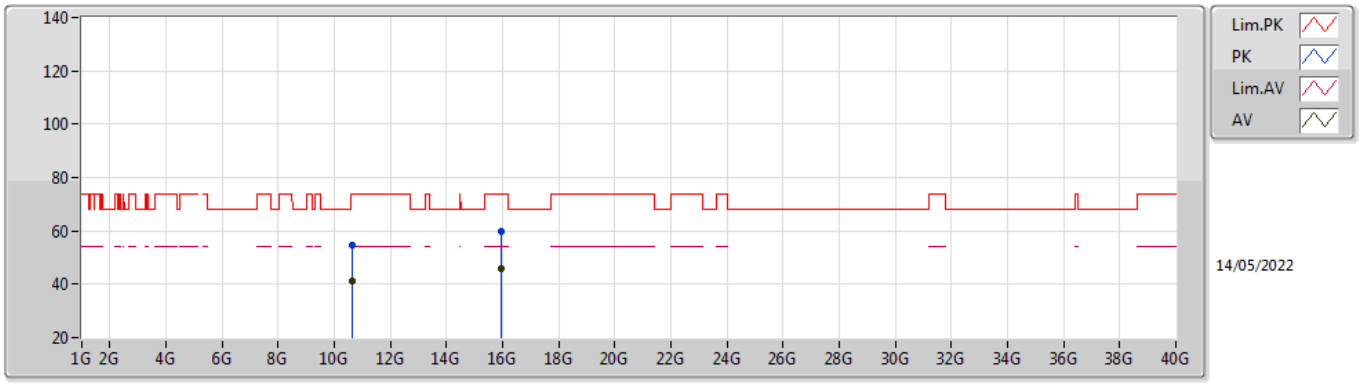


EUT X_1TX
Setting 18.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.64336G	54.71	74.00	-19.29	41.17	3	Horizontal	188	1.89	-	38.29	10.60	35.35
AV	10.64366G	41.02	54.00	-12.98	27.48	3	Horizontal	188	1.89	-	38.29	10.60	35.35
PK	15.95238G	60.01	74.00	-13.99	44.88	3	Horizontal	250	1.30	-	37.50	13.38	35.75
AV	15.95484G	45.93	54.00	-8.07	30.81	3	Horizontal	250	1.30	-	37.49	13.38	35.75

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

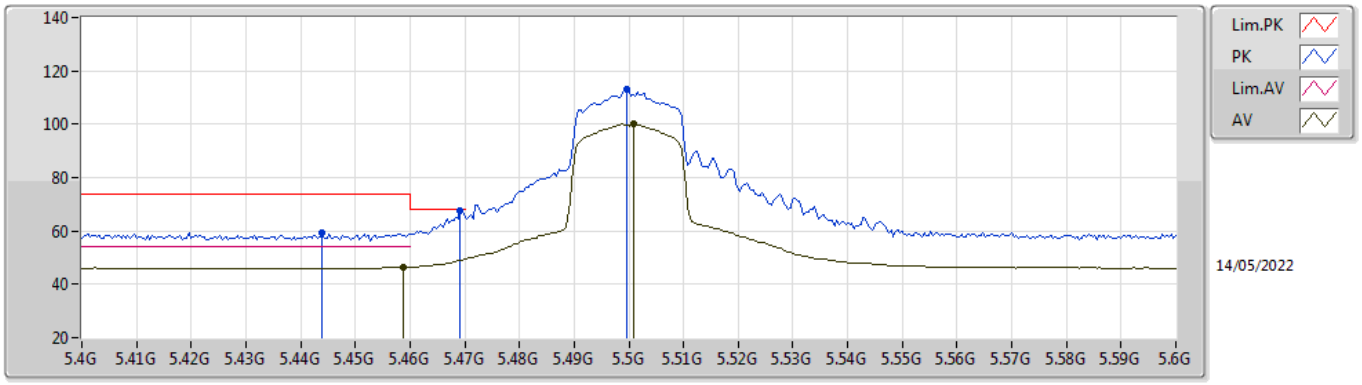


EUT X_1TX
Setting 17.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.444G	59.38	74.00	-14.62	52.98	3	Vertical	260	2.16	-	34.51	7.24	35.35
PK	5.4692G	67.61	68.20	-0.59	61.15	3	Vertical	260	2.16	-	34.54	7.27	35.35
AV	5.4588G	46.44	54.00	-7.56	40.01	3	Vertical	260	2.16	-	34.52	7.26	35.35
PK	5.4996G	112.95	Inf	-Inf	106.40	3	Vertical	260	2.16	-	34.60	7.30	35.35
AV	5.5008G	100.00	Inf	-Inf	93.45	3	Vertical	260	2.16	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

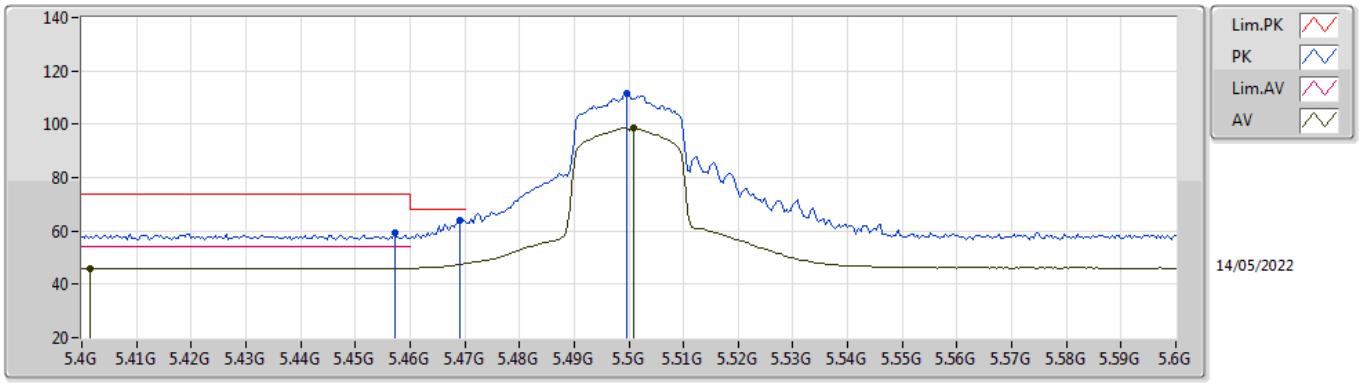


EUT X_1TX
Setting 17.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4572G	59.35	74.00	-14.65	52.93	3	Horizontal	197	2.15	-	34.51	7.26	35.35
AV	5.4016G	46.11	54.00	-7.89	39.66	3	Horizontal	197	2.15	-	34.60	7.20	35.35
PK	5.4692G	64.12	68.20	-4.08	57.66	3	Horizontal	197	2.15	-	34.54	7.27	35.35
PK	5.4996G	111.49	Inf	-Inf	104.94	3	Horizontal	197	2.15	-	34.60	7.30	35.35
AV	5.5008G	98.46	Inf	-Inf	91.91	3	Horizontal	197	2.15	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

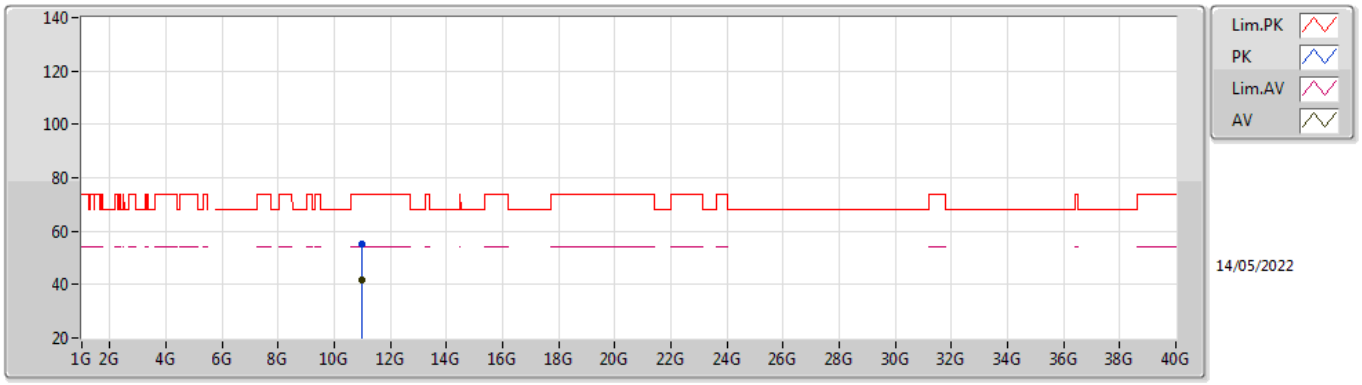


EUT X_1TX
Setting 17.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9907G	54.97	74.00	-19.03	40.98	3	Vertical	240	1.80	-	38.39	10.65	35.05
AV	10.99676G	41.67	54.00	-12.33	27.66	3	Vertical	240	1.80	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

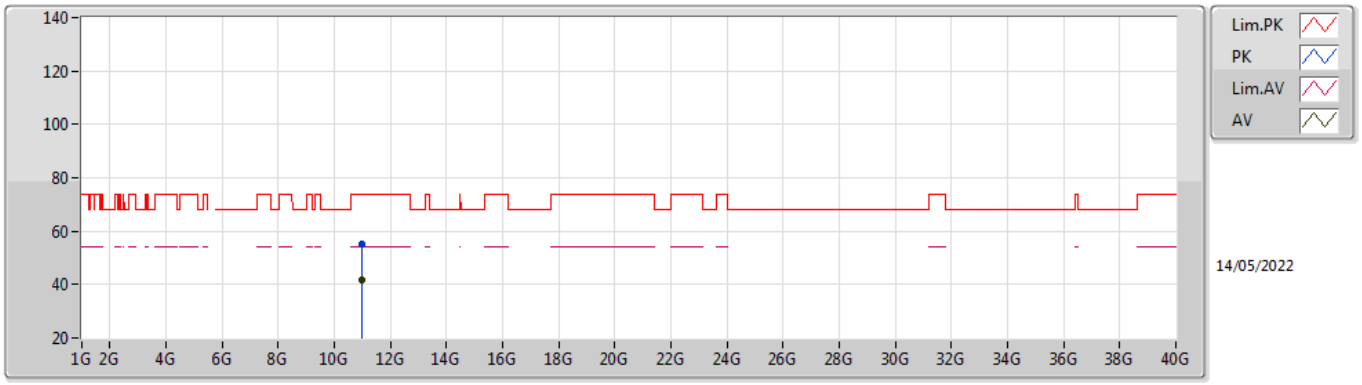


EUT X_1TX
Setting 17.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.99016G	55.11	74.00	-18.89	41.12	3	Horizontal	92	2.23	-	38.39	10.65	35.05
AV	10.9877G	41.69	54.00	-12.31	27.70	3	Horizontal	92	2.23	-	38.39	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

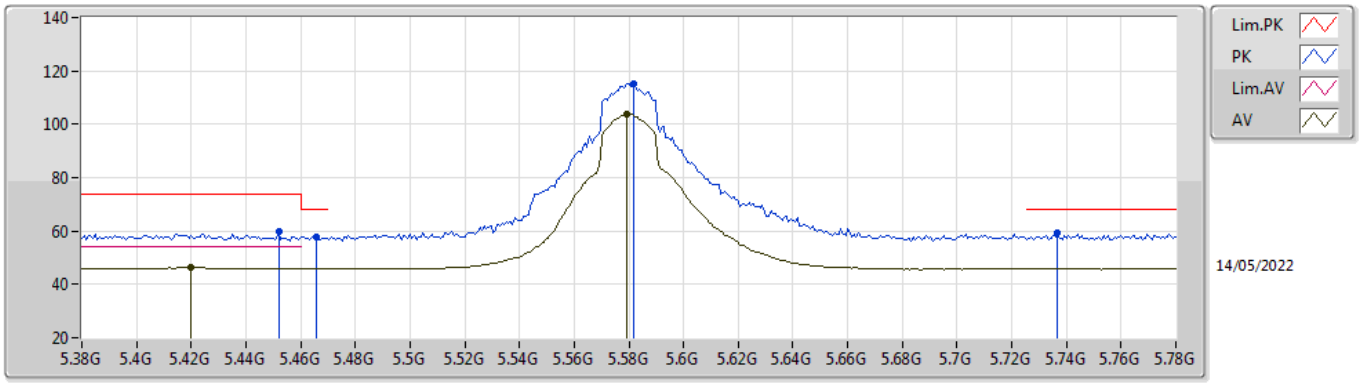


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.452G	59.67	74.00	-14.33	53.27	3	Vertical	322	2.05	-	34.50	7.25	35.35
AV	5.42G	46.36	54.00	-7.64	39.93	3	Vertical	322	2.05	-	34.56	7.22	35.35
PK	5.4656G	57.94	68.20	-10.26	51.49	3	Vertical	322	2.05	-	34.53	7.27	35.35
PK	5.5816G	115.34	Inf	-Inf	108.75	3	Vertical	322	2.05	-	34.60	7.38	35.39
AV	5.5792G	103.65	Inf	-Inf	97.06	3	Vertical	322	2.05	-	34.60	7.38	35.39
PK	5.7368G	59.11	68.20	-9.09	52.95	3	Vertical	322	2.05	-	34.23	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

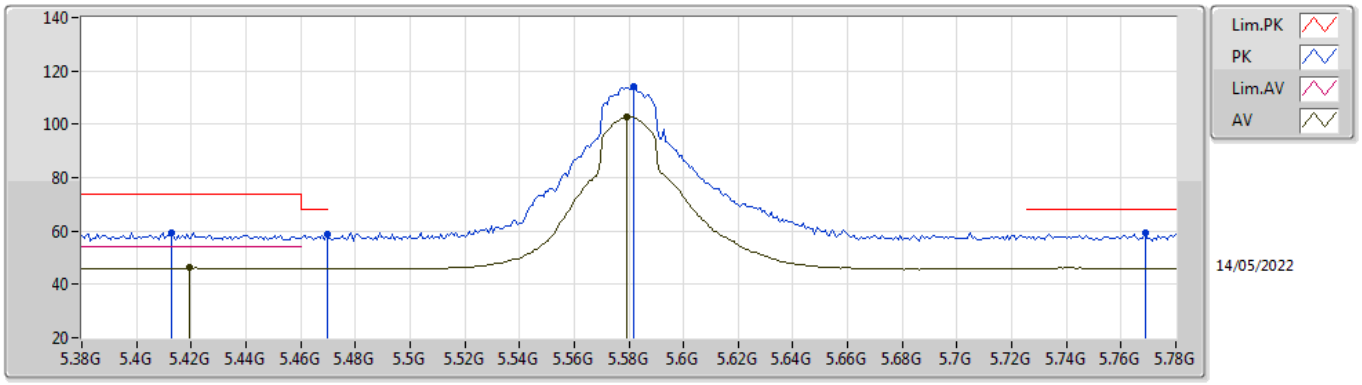


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4128G	59.54	74.00	-14.46	53.11	3	Horizontal	196	1.93	-	34.57	7.21	35.35
AV	5.4192G	46.21	54.00	-7.79	39.78	3	Horizontal	196	1.93	-	34.56	7.22	35.35
PK	5.4696G	58.84	68.20	-9.36	52.38	3	Horizontal	196	1.93	-	34.54	7.27	35.35
PK	5.5816G	114.23	Inf	-Inf	107.64	3	Horizontal	196	1.93	-	34.60	7.38	35.39
AV	5.5792G	102.85	Inf	-Inf	96.26	3	Horizontal	196	1.93	-	34.60	7.38	35.39
PK	5.7688G	59.06	68.20	-9.14	52.94	3	Horizontal	196	1.93	-	34.20	7.40	35.48

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

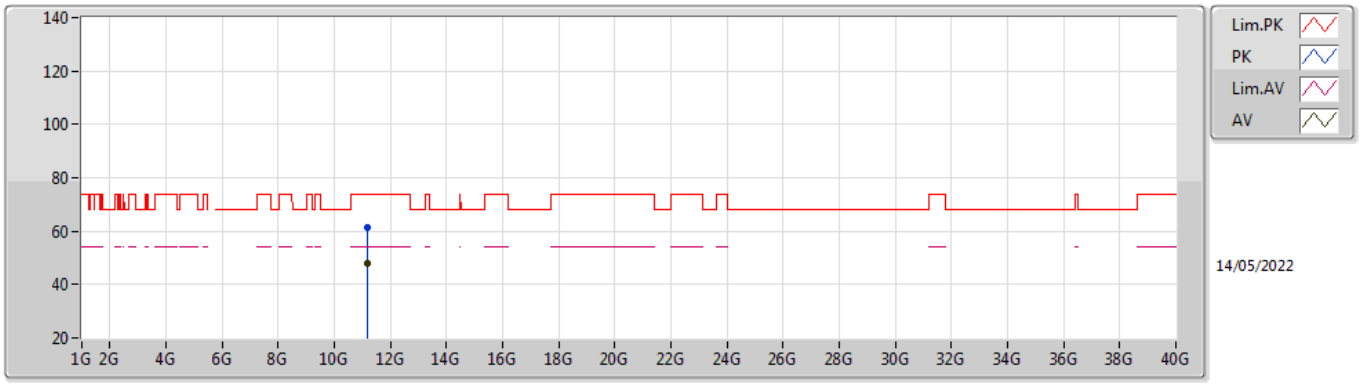


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.16156G	61.20	74.00	-12.80	47.19	3	Vertical	196	2.30	-	38.56	10.67	35.22
AV	11.1576G	47.80	54.00	-6.20	33.79	3	Vertical	196	2.30	-	38.56	10.67	35.22

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

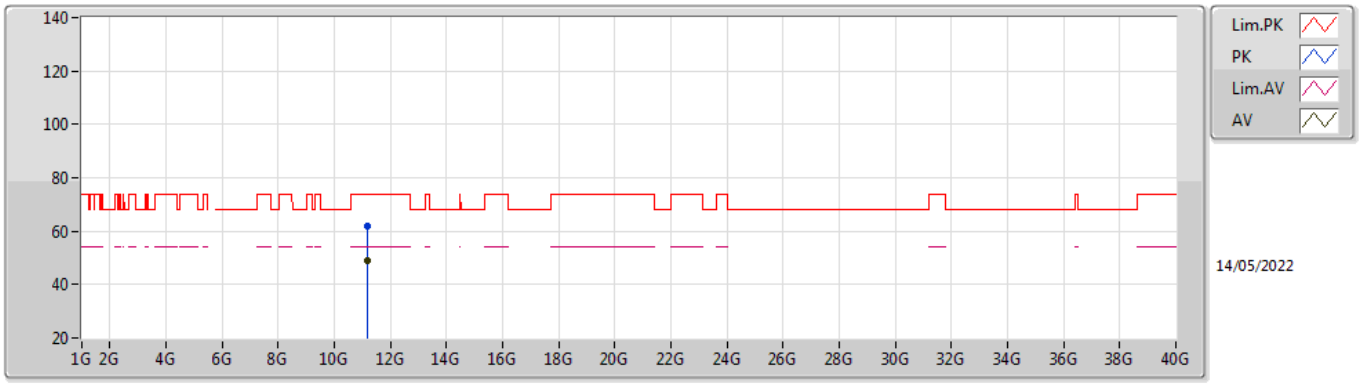


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.15844G	62.15	74.00	-11.85	48.14	3	Horizontal	234	2.12	-	38.56	10.67	35.22
AV	11.15736G	49.21	54.00	-4.79	35.20	3	Horizontal	234	2.12	-	38.56	10.67	35.22

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

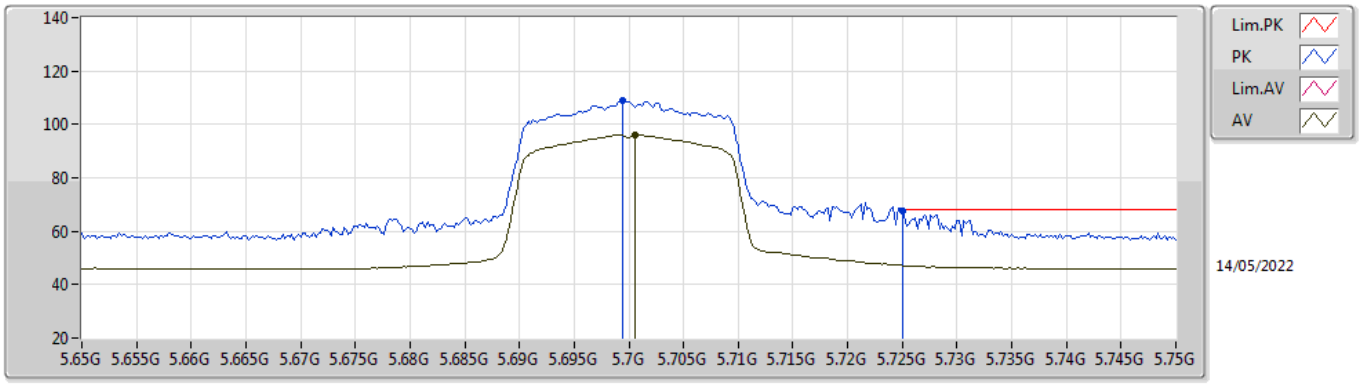


EUT X_1TX
Setting 14
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6994G	109.03	Inf	-Inf	102.78	3	Vertical	332	2.08	-	34.30	7.40	35.45
AV	5.7006G	96.00	Inf	-Inf	89.75	3	Vertical	332	2.08	-	34.30	7.40	35.45
PK	5.725G	67.56	68.20	-0.64	61.37	3	Vertical	332	2.08	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

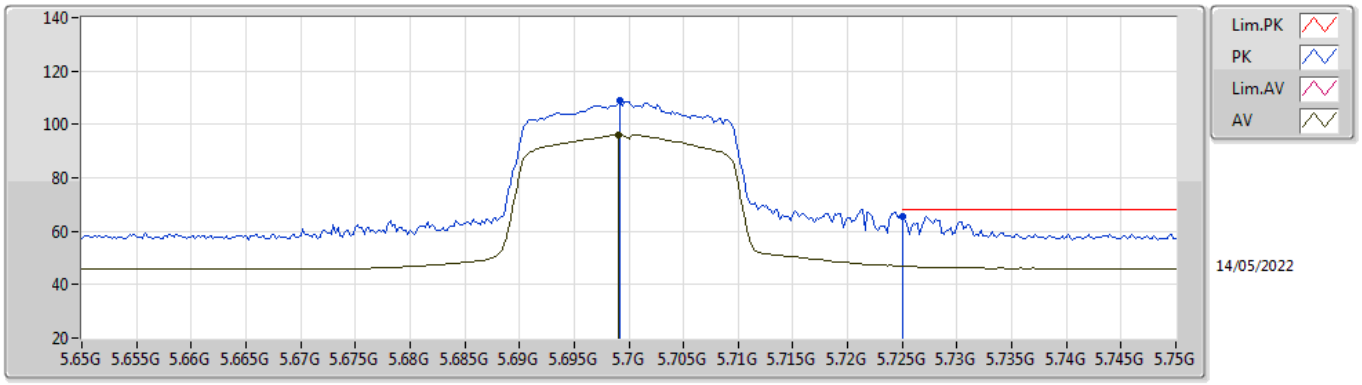


EUT X_1TX
Setting 14
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6992G	108.81	Inf	-Inf	102.56	3	Horizontal	193	1.97	-	34.30	7.40	35.45
AV	5.699G	95.95	Inf	-Inf	89.70	3	Horizontal	193	1.97	-	34.30	7.40	35.45
PK	5.725G	65.62	68.20	-2.58	59.43	3	Horizontal	193	1.97	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

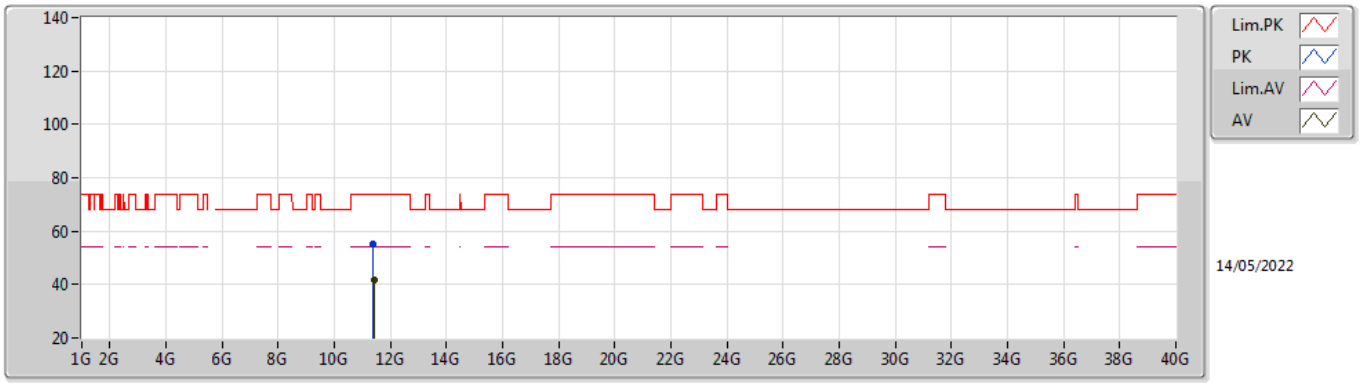


EUT X_1TX
Setting 14
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.39178G	55.43	74.00	-18.57	41.41	3	Vertical	12	2.96	-	38.79	10.71	35.48
AV	11.41386G	41.78	54.00	-12.22	27.74	3	Vertical	12	2.96	-	38.83	10.71	35.50

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

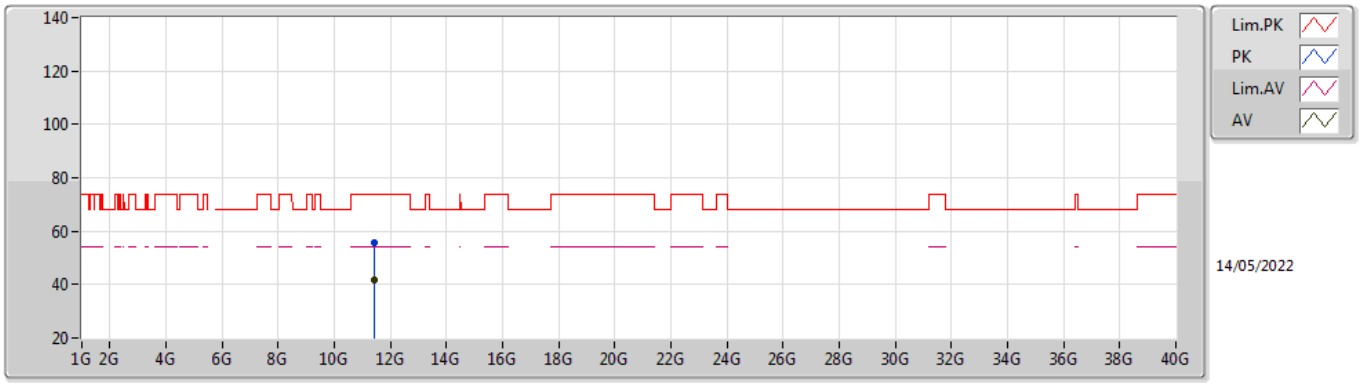


EUT X_1TX
Setting 14
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.41266G	55.52	74.00	-18.48	41.48	3	Horizontal	67	1.52	-	38.83	10.71	35.50
AV	11.41488G	41.78	54.00	-12.22	27.74	3	Horizontal	67	1.52	-	38.83	10.71	35.50

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

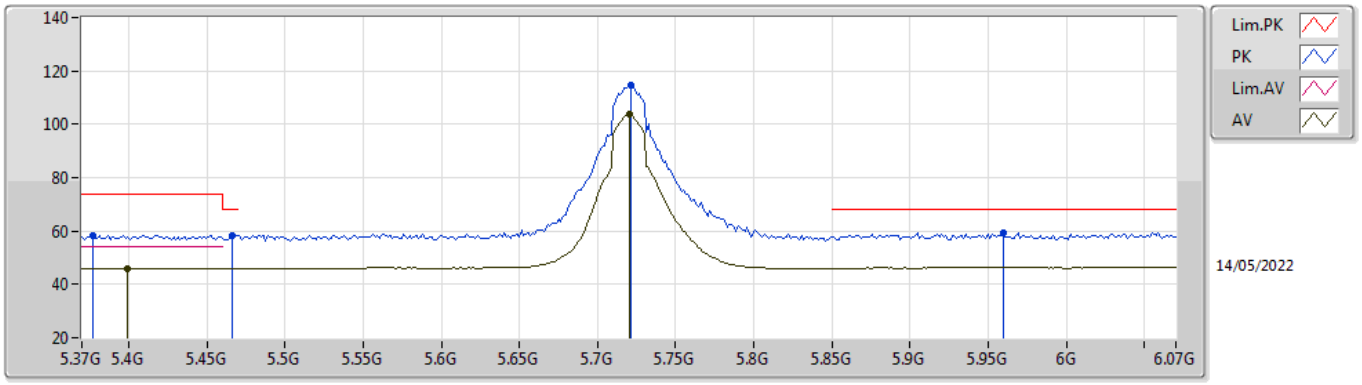


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.377G	58.31	74.00	-15.69	51.91	3	Vertical	326	2.08	-	34.55	7.20	35.35
AV	5.3994G	46.10	54.00	-7.90	39.65	3	Vertical	326	2.08	-	34.60	7.20	35.35
PK	5.4666G	58.36	68.20	-9.84	51.91	3	Vertical	326	2.08	-	34.53	7.27	35.35
PK	5.7214G	114.51	Inf	-Inf	108.31	3	Vertical	326	2.08	-	34.26	7.40	35.46
AV	5.72G	103.59	Inf	-Inf	97.39	3	Vertical	326	2.08	-	34.26	7.40	35.46
PK	5.9594G	59.19	68.20	-9.01	52.41	3	Vertical	326	2.08	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

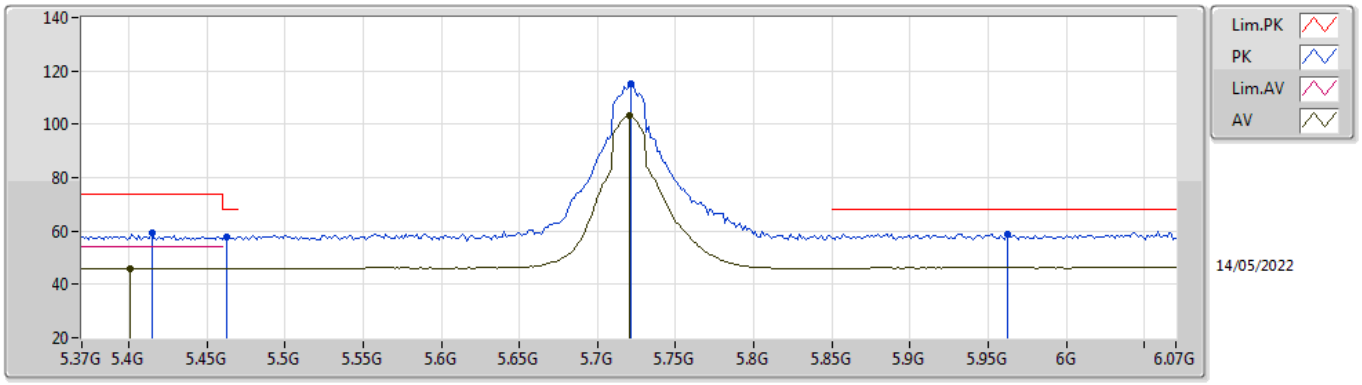


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4148G	59.20	74.00	-14.80	52.77	3	Horizontal	193	2.07	-	34.57	7.21	35.35
AV	5.4008G	46.10	54.00	-7.90	39.65	3	Horizontal	193	2.07	-	34.60	7.20	35.35
PK	5.4624G	57.67	68.20	-10.53	51.24	3	Horizontal	193	2.07	-	34.52	7.26	35.35
PK	5.7214G	114.93	Inf	-Inf	108.73	3	Horizontal	193	2.07	-	34.26	7.40	35.46
AV	5.72G	103.23	Inf	-Inf	97.03	3	Horizontal	193	2.07	-	34.26	7.40	35.46
PK	5.9622G	58.91	68.20	-9.29	52.13	3	Horizontal	193	2.07	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

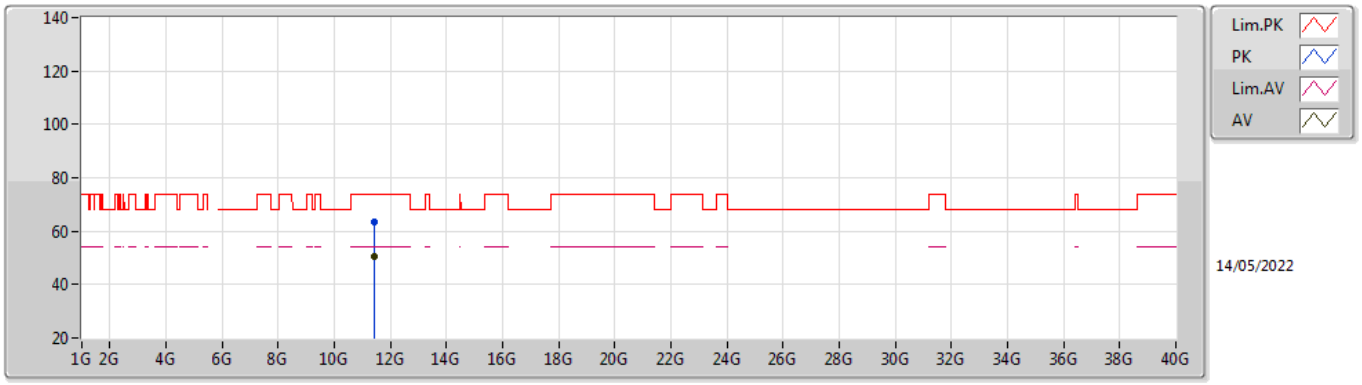


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.44162G	63.36	74.00	-10.64	49.29	3	Vertical	187	2.48	-	38.88	10.72	35.53
AV	11.43742G	50.37	54.00	-3.63	36.31	3	Vertical	187	2.48	-	38.87	10.72	35.53

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

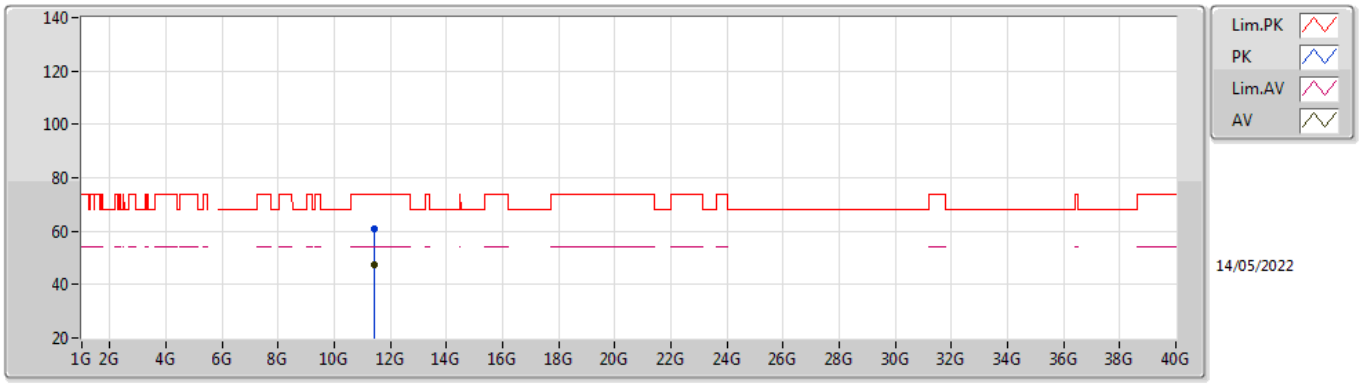


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.44192G	61.01	74.00	-12.99	46.94	3	Horizontal	181	2.12	-	38.88	10.72	35.53
AV	11.43742G	47.64	54.00	-6.36	33.58	3	Horizontal	181	2.12	-	38.87	10.72	35.53

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

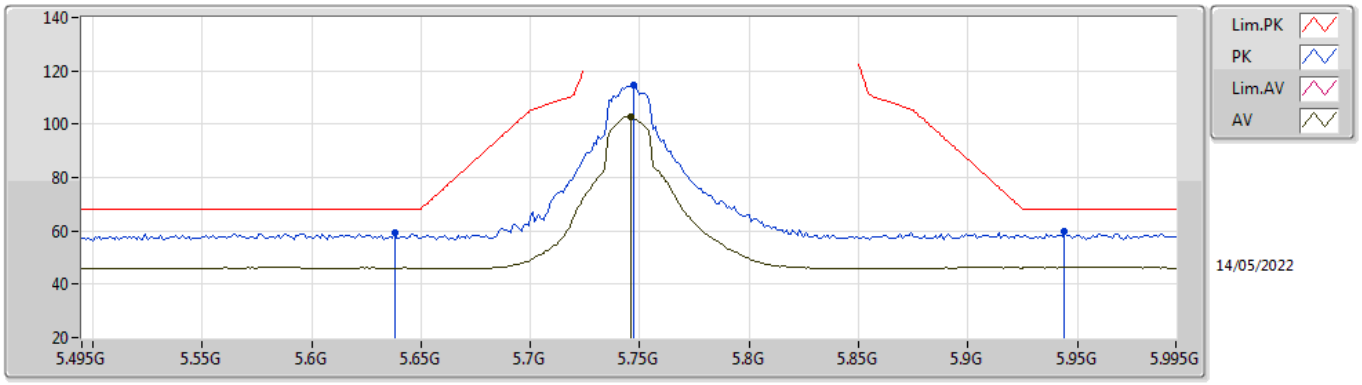


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.638G	59.13	68.20	-9.07	52.63	3	Vertical	333	2.06	-	34.52	7.40	35.42
PK	5.747G	114.55	Inf	-Inf	108.41	3	Vertical	333	2.06	-	34.21	7.40	35.47
AV	5.746G	102.92	Inf	-Inf	96.78	3	Vertical	333	2.06	-	34.21	7.40	35.47
PK	5.944G	60.07	68.20	-8.13	53.32	3	Vertical	333	2.06	-	34.78	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

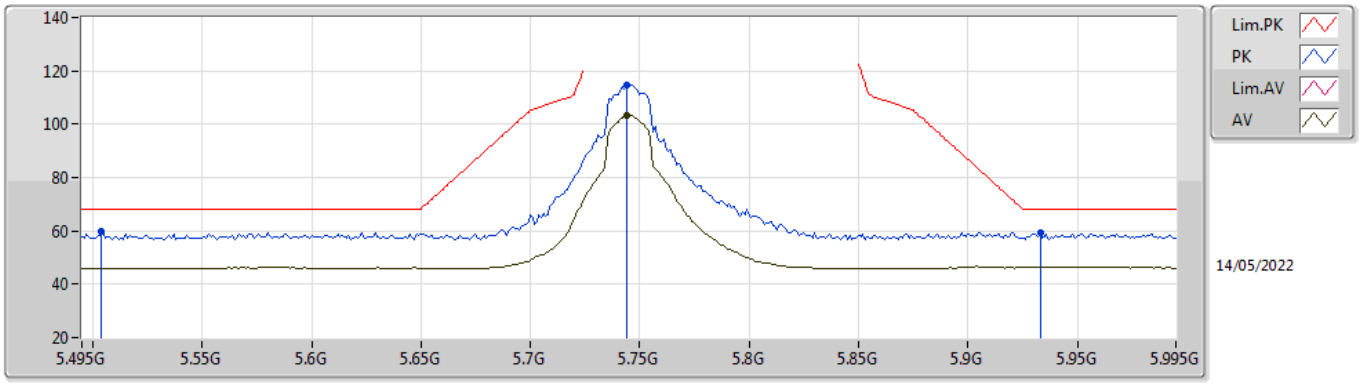


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.504G	59.60	68.20	-8.60	53.05	3	Horizontal	192	2.02	-	34.60	7.30	35.35
PK	5.744G	114.81	Inf	-Inf	108.67	3	Horizontal	192	2.02	-	34.21	7.40	35.47
AV	5.744G	103.25	Inf	-Inf	97.11	3	Horizontal	192	2.02	-	34.21	7.40	35.47
PK	5.933G	59.52	68.20	-8.68	52.83	3	Horizontal	192	2.02	-	34.73	7.53	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

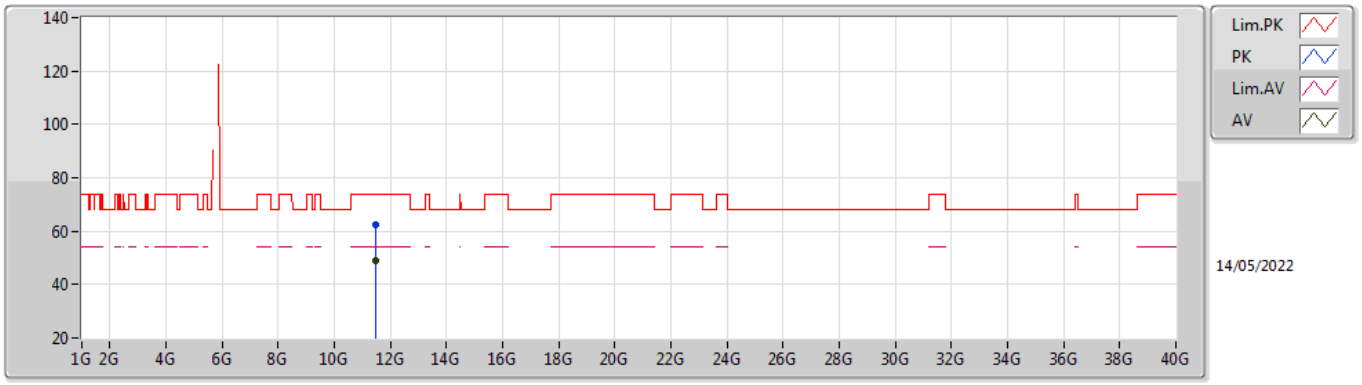


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.49216G	62.22	74.00	-11.78	48.11	3	Vertical	157	2.39	-	38.98	10.72	35.59
AV	11.4873G	48.71	54.00	-5.29	34.61	3	Vertical	157	2.39	-	38.97	10.72	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

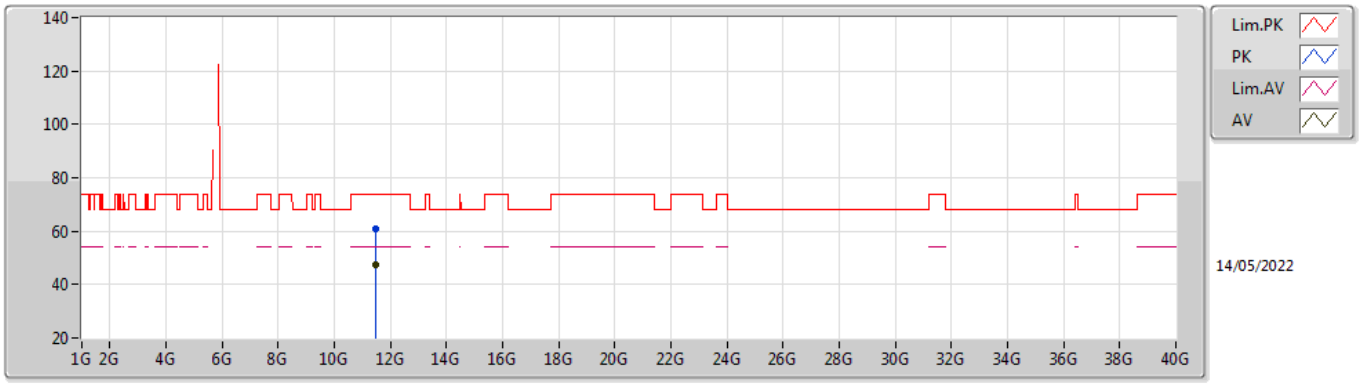


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.49318G	60.78	74.00	-13.22	46.66	3	Horizontal	184	2.00	-	38.99	10.72	35.59
AV	11.48754G	47.63	54.00	-6.37	33.52	3	Horizontal	184	2.00	-	38.98	10.72	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

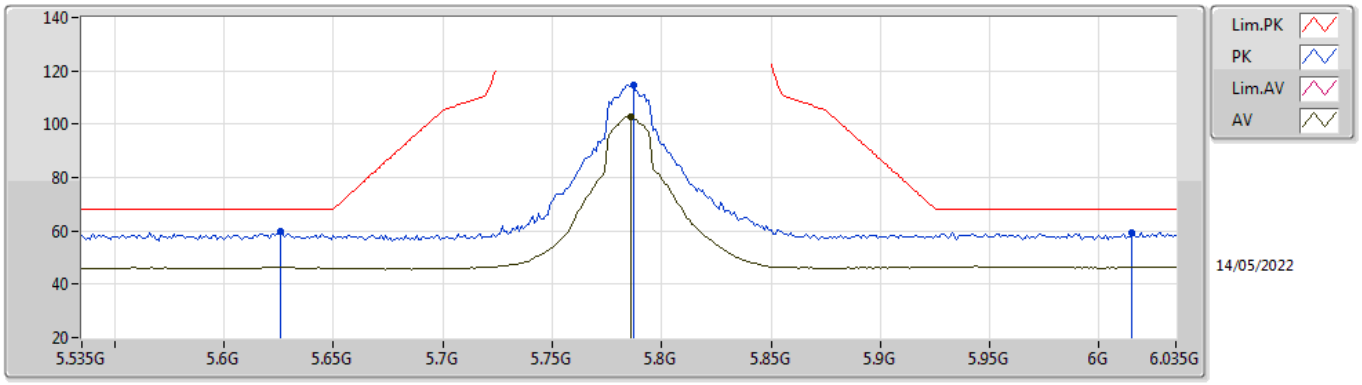


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.626G	59.66	68.20	-8.54	53.12	3	Vertical	332	2.05	-	34.55	7.40	35.41
PK	5.787G	114.48	Inf	-Inf	108.37	3	Vertical	332	2.05	-	34.20	7.40	35.49
AV	5.786G	102.76	Inf	-Inf	96.65	3	Vertical	332	2.05	-	34.20	7.40	35.49
PK	6.015G	59.56	68.20	-8.64	52.71	3	Vertical	332	2.05	-	34.83	7.61	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

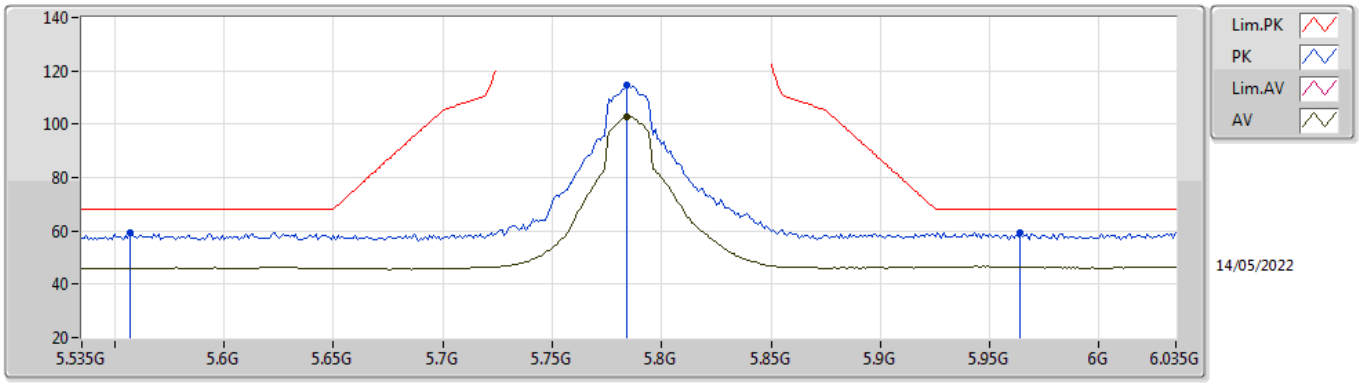


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.557G	59.27	68.20	-8.93	52.69	3	Horizontal	194	2.09	-	34.60	7.36	35.38
PK	5.784G	114.58	Inf	-Inf	108.47	3	Horizontal	194	2.09	-	34.20	7.40	35.49
AV	5.784G	102.95	Inf	-Inf	96.84	3	Horizontal	194	2.09	-	34.20	7.40	35.49
PK	5.964G	59.48	68.20	-8.72	52.70	3	Horizontal	194	2.09	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

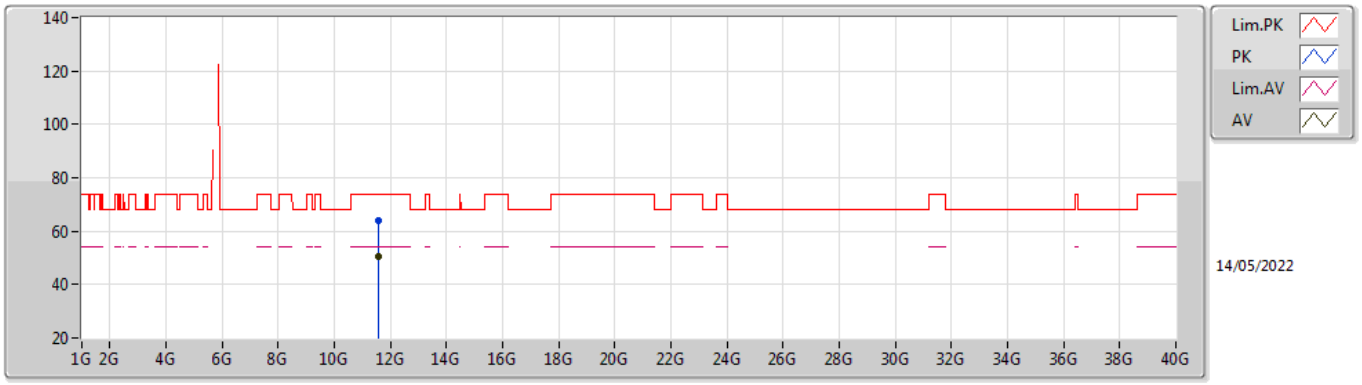


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.57162G	63.99	74.00	-10.01	49.54	3	Vertical	189	2.44	-	39.29	10.74	35.58
AV	11.5673G	50.33	54.00	-3.67	35.91	3	Vertical	189	2.44	-	39.27	10.74	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

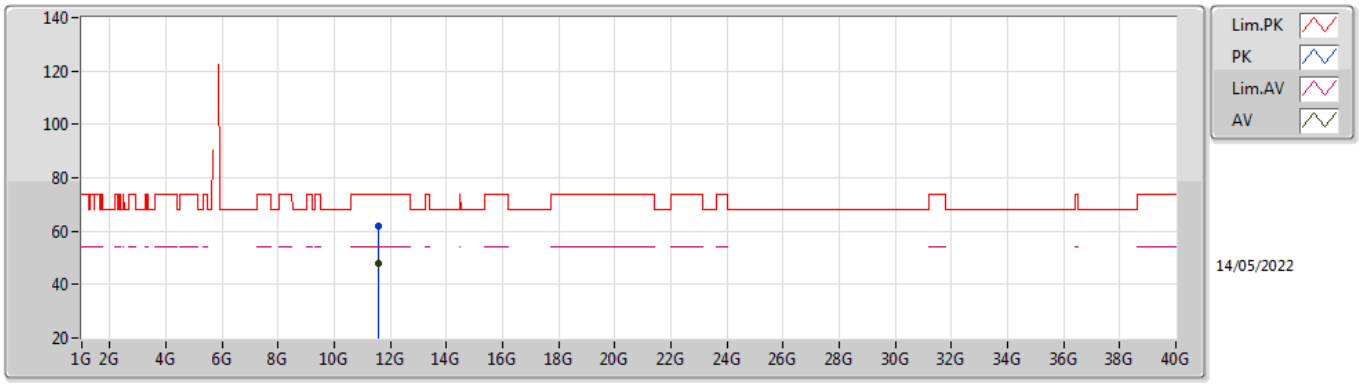


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.57342G	61.99	74.00	-12.01	47.54	3	Horizontal	184	2.09	-	39.29	10.74	35.58
AV	11.56742G	48.16	54.00	-5.84	33.74	3	Horizontal	184	2.09	-	39.27	10.74	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

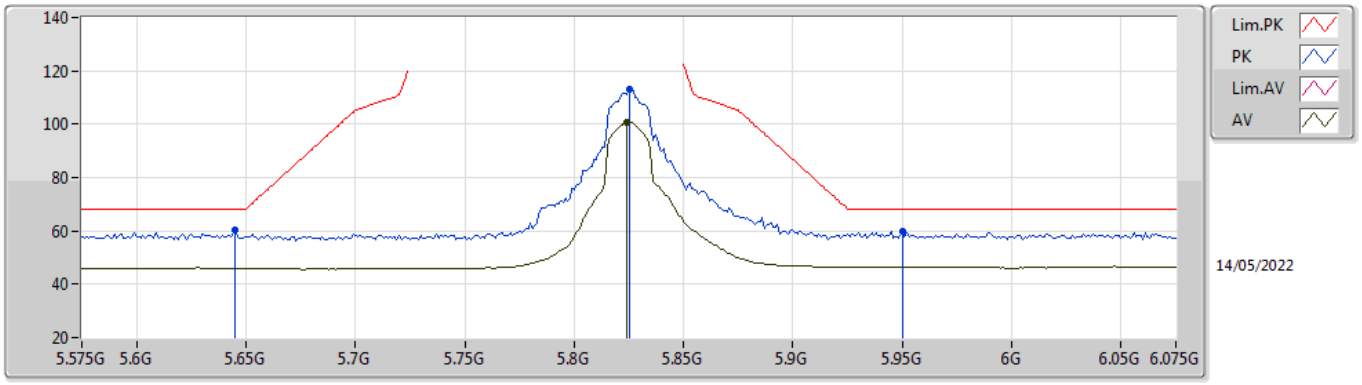


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.645G	60.39	68.20	-7.81	53.90	3	Vertical	286	1.80	-	34.51	7.40	35.42
PK	5.825G	112.97	Inf	-Inf	106.80	3	Vertical	286	1.80	-	34.25	7.43	35.51
AV	5.824G	100.85	Inf	-Inf	94.69	3	Vertical	286	1.80	-	34.25	7.42	35.51
PK	5.95G	59.89	68.20	-8.31	53.12	3	Vertical	286	1.80	-	34.80	7.55	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

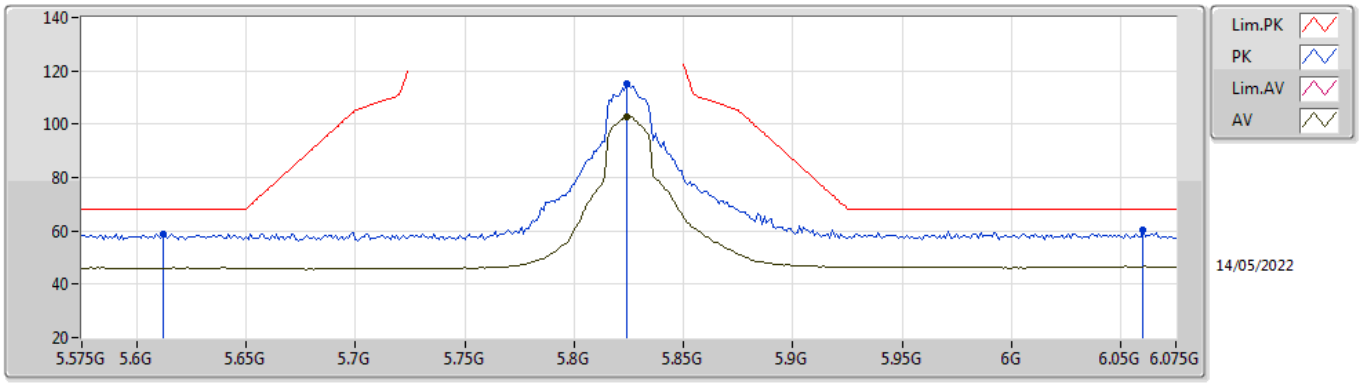


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.612G	58.86	68.20	-9.34	52.29	3	Horizontal	191	1.99	-	34.58	7.40	35.41
PK	5.824G	114.97	Inf	-Inf	108.81	3	Horizontal	191	1.99	-	34.25	7.42	35.51
AV	5.824G	102.66	Inf	-Inf	96.50	3	Horizontal	191	1.99	-	34.25	7.42	35.51
PK	6.06G	60.14	68.20	-8.06	53.17	3	Horizontal	191	1.99	-	34.92	7.63	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

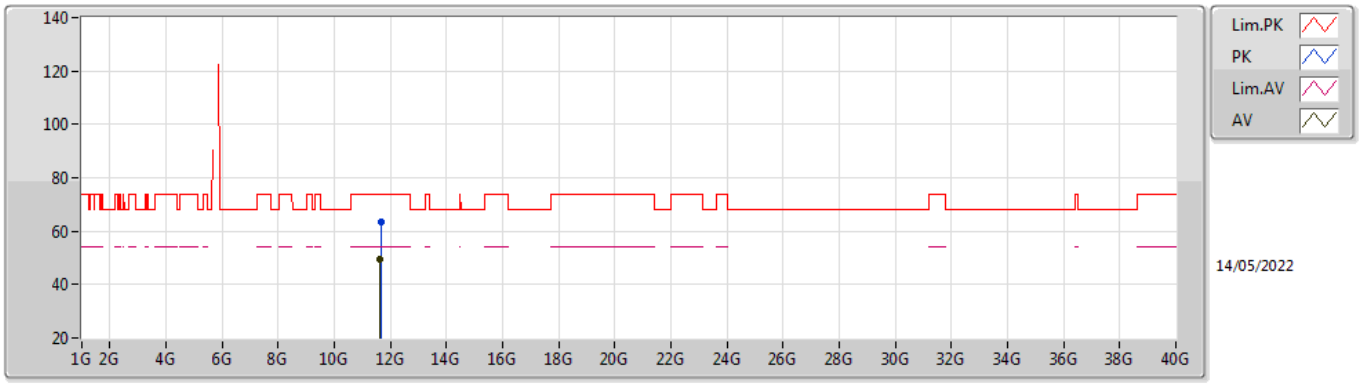


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65222G	63.29	74.00	-10.71	48.71	3	Vertical	180	2.44	-	39.40	10.75	35.57
AV	11.64742G	49.51	54.00	-4.49	34.93	3	Vertical	180	2.44	-	39.40	10.75	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

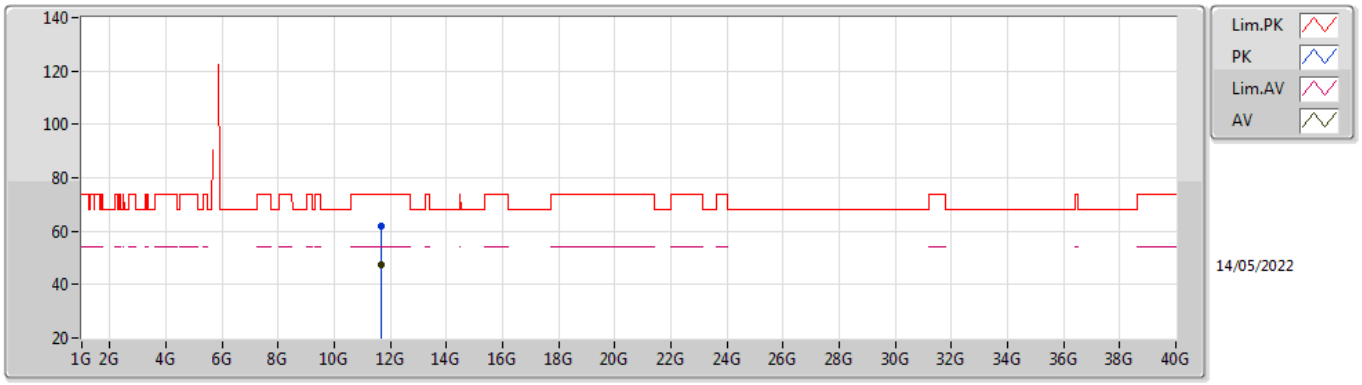


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65342G	61.82	74.00	-12.18	47.24	3	Horizontal	193	2.07	-	39.40	10.75	35.57
AV	11.65174G	47.63	54.00	-6.37	33.05	3	Horizontal	193	2.07	-	39.40	10.75	35.57

802.11ax HEW40_Nss1,(MCS0)_1TX

5190MHz_TnomVnom

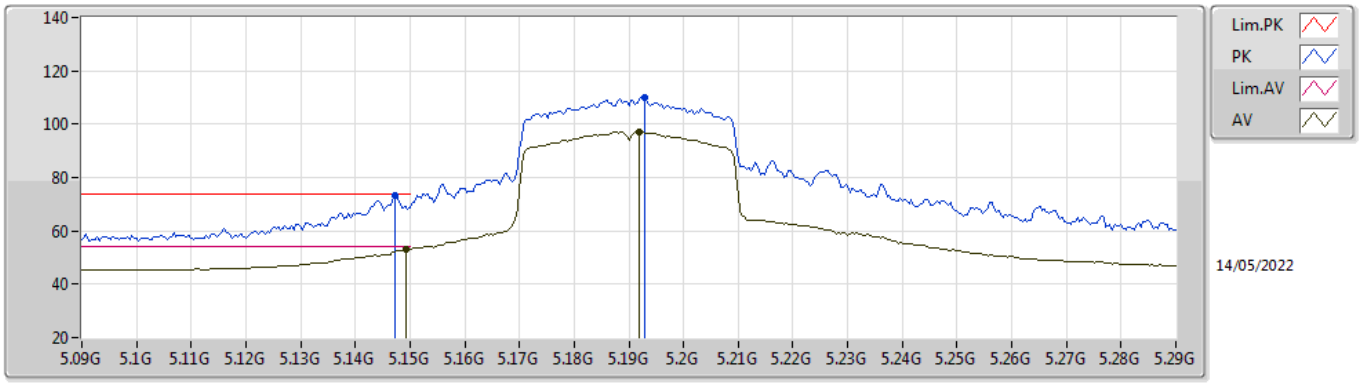


EUT X_1TX
Setting 17
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1472G	73.34	74.00	-0.66	67.52	3	Vertical	309	2.03	-	33.99	7.17	35.34
AV	5.1492G	53.30	54.00	-0.70	47.47	3	Vertical	309	2.03	-	34.00	7.17	35.34
PK	5.1928G	109.91	Inf	-Inf	103.88	3	Vertical	309	2.03	-	34.17	7.20	35.34
AV	5.192G	97.08	Inf	-Inf	91.05	3	Vertical	309	2.03	-	34.17	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5190MHz_TnomVnom

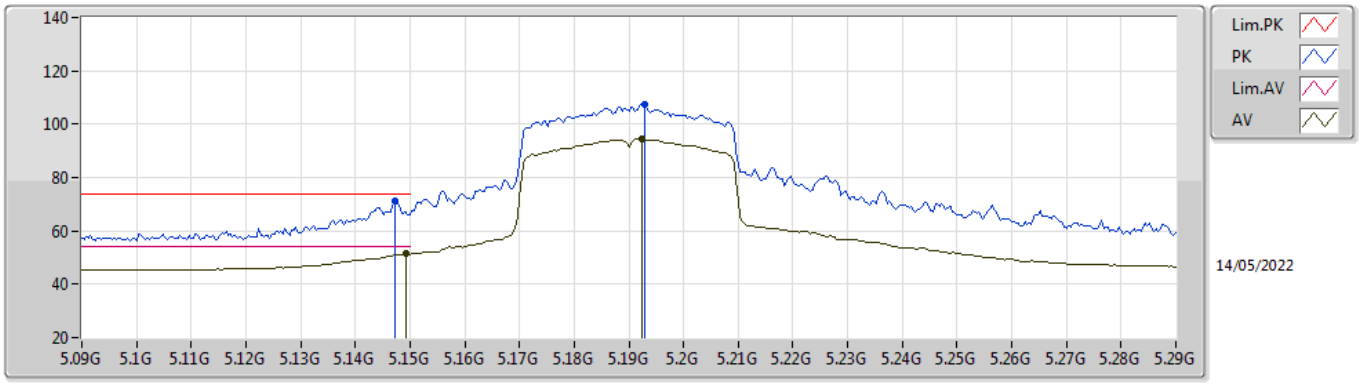


EUT X_1TX
Setting 17
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1472G	71.22	74.00	-2.78	65.40	3	Horizontal	201	2.14	-	33.99	7.17	35.34
AV	5.1492G	51.31	54.00	-2.69	45.48	3	Horizontal	201	2.14	-	34.00	7.17	35.34
PK	5.1928G	107.26	Inf	-Inf	101.23	3	Horizontal	201	2.14	-	34.17	7.20	35.34
AV	5.1924G	94.46	Inf	-Inf	88.43	3	Horizontal	201	2.14	-	34.17	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5190MHz_TnomVnom

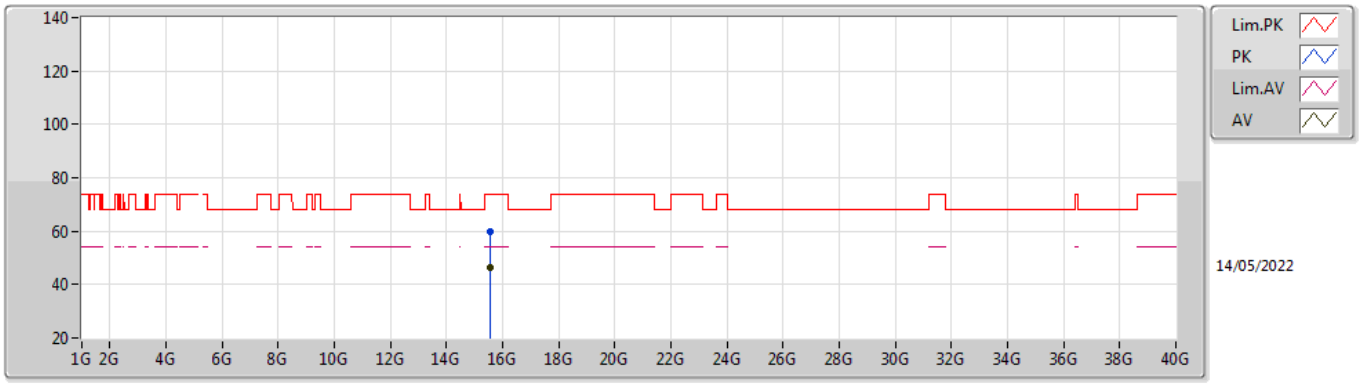


EUT X_1TX
Setting 17
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.55848G	59.78	74.00	-14.22	43.73	3	Vertical	115	1.17	-	38.29	13.18	35.42
AV	15.56028G	46.53	54.00	-7.47	30.49	3	Vertical	115	1.17	-	38.28	13.18	35.42

802.11ax HEW40_Nss1,(MCS0)_1TX

5190MHz_TnomVnom

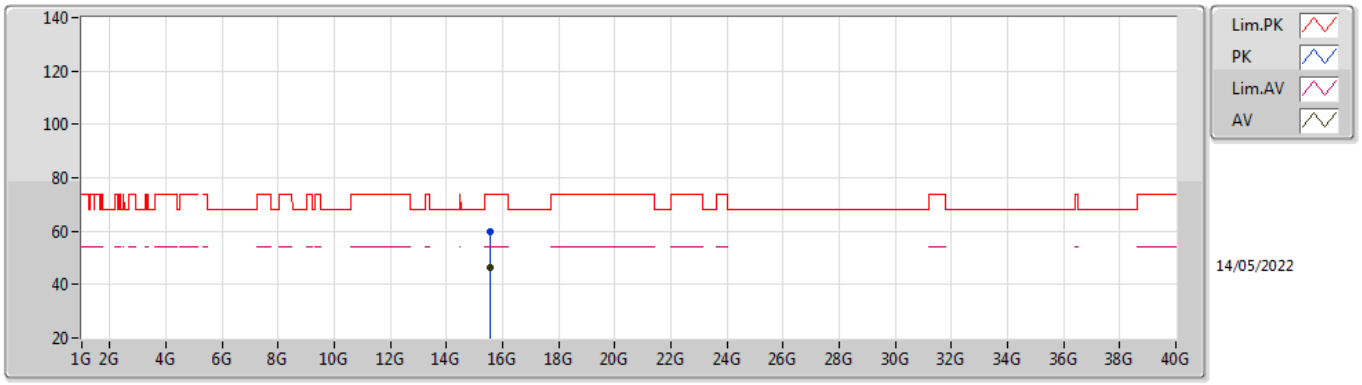


EUT X_1TX
Setting 17
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.56664G	59.66	74.00	-14.34	43.68	3	Horizontal	337	2.93	-	38.23	13.18	35.43
AV	15.5613G	46.57	54.00	-7.43	30.54	3	Horizontal	337	2.93	-	38.27	13.18	35.42

802.11ax HEW40_Nss1,(MCS0)_1TX

5230MHz_TnomVnom

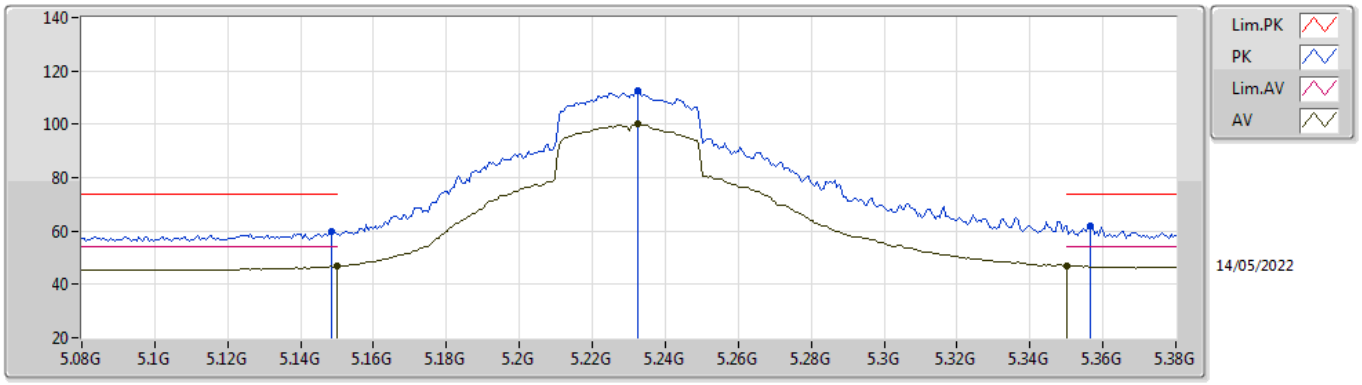


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1484G	59.67	74.00	-14.33	53.84	3	Vertical	311	2.03	-	34.00	7.17	35.34
AV	5.15G	46.72	54.00	-7.28	40.89	3	Vertical	311	2.03	-	34.00	7.17	35.34
PK	5.2324G	112.46	Inf	-Inf	106.27	3	Vertical	311	2.03	-	34.33	7.20	35.34
AV	5.2324G	100.13	Inf	-Inf	93.94	3	Vertical	311	2.03	-	34.33	7.20	35.34
PK	5.3566G	62.09	74.00	-11.91	55.72	3	Vertical	311	2.03	-	34.51	7.20	35.34
AV	5.35G	46.79	54.00	-7.21	40.43	3	Vertical	311	2.03	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5230MHz_TnomVnom

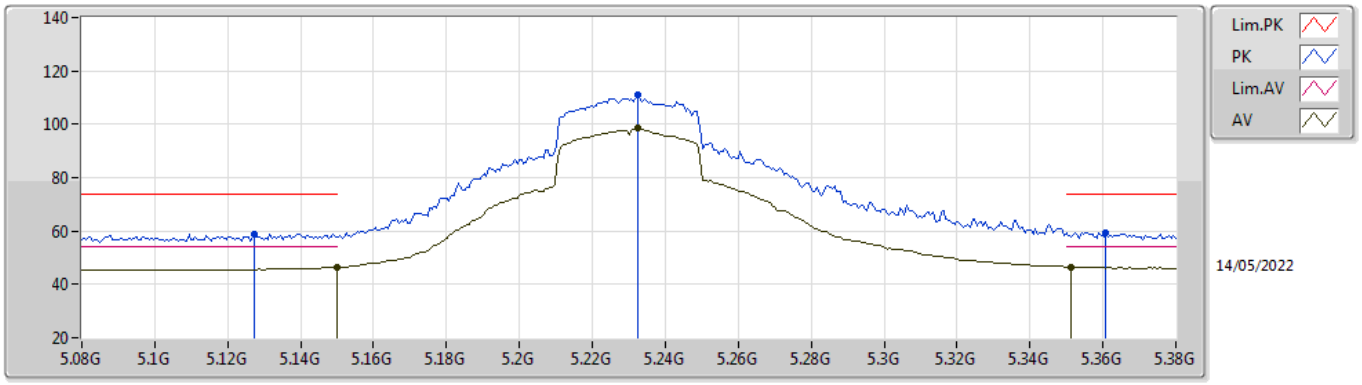


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1274G	58.87	74.00	-15.13	53.10	3	Horizontal	201	2.02	-	33.95	7.16	35.34
AV	5.15G	46.33	54.00	-7.67	40.50	3	Horizontal	201	2.02	-	34.00	7.17	35.34
PK	5.2324G	110.79	Inf	-Inf	104.60	3	Horizontal	201	2.02	-	34.33	7.20	35.34
AV	5.2324G	98.48	Inf	-Inf	92.29	3	Horizontal	201	2.02	-	34.33	7.20	35.34
PK	5.3608G	59.40	74.00	-14.60	53.02	3	Horizontal	201	2.02	-	34.52	7.20	35.34
AV	5.3512G	46.54	54.00	-7.46	40.18	3	Horizontal	201	2.02	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5230MHz_TnomVnom

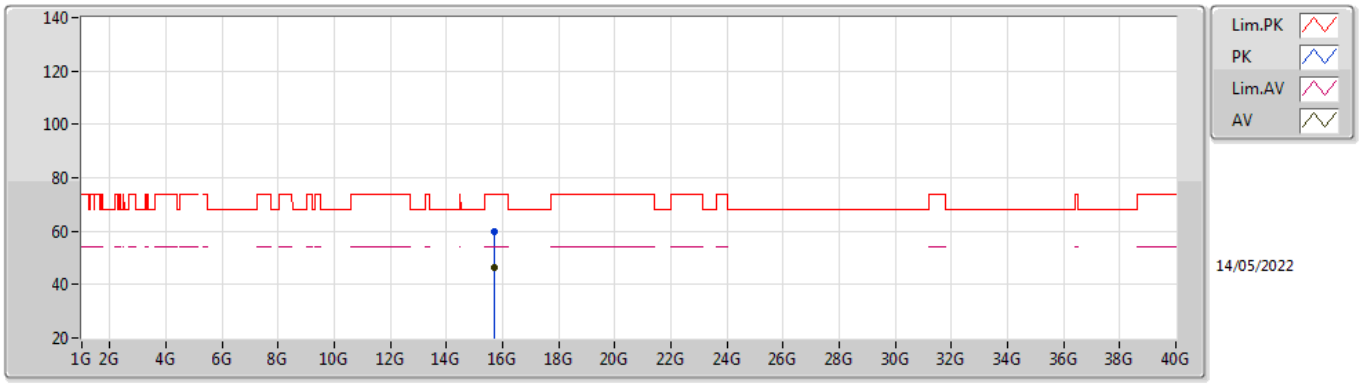


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.70224G	59.88	74.00	-14.12	44.66	3	Vertical	97	1.86	-	37.51	13.25	35.54
AV	15.69912G	46.13	54.00	-7.87	30.92	3	Vertical	97	1.86	-	37.50	13.25	35.54

802.11ax HEW40_Nss1,(MCS0)_1TX

5230MHz_TnomVnom

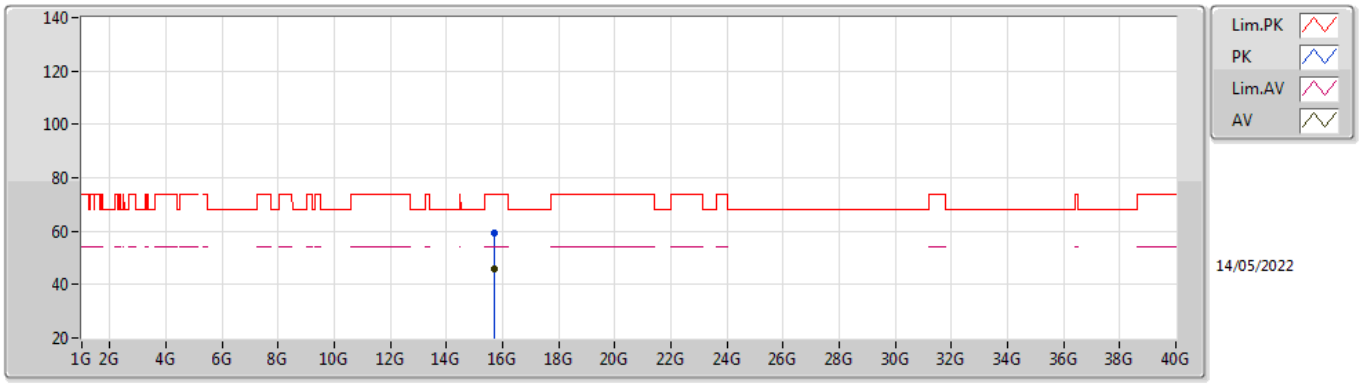


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.70452G	59.31	74.00	-14.69	44.08	3	Horizontal	227	2.35	-	37.52	13.25	35.54
AV	15.70476G	46.11	54.00	-7.89	30.88	3	Horizontal	227	2.35	-	37.52	13.25	35.54

802.11ax HEW40_Nss1,(MCS0)_1TX

5270MHz_TnomVnom

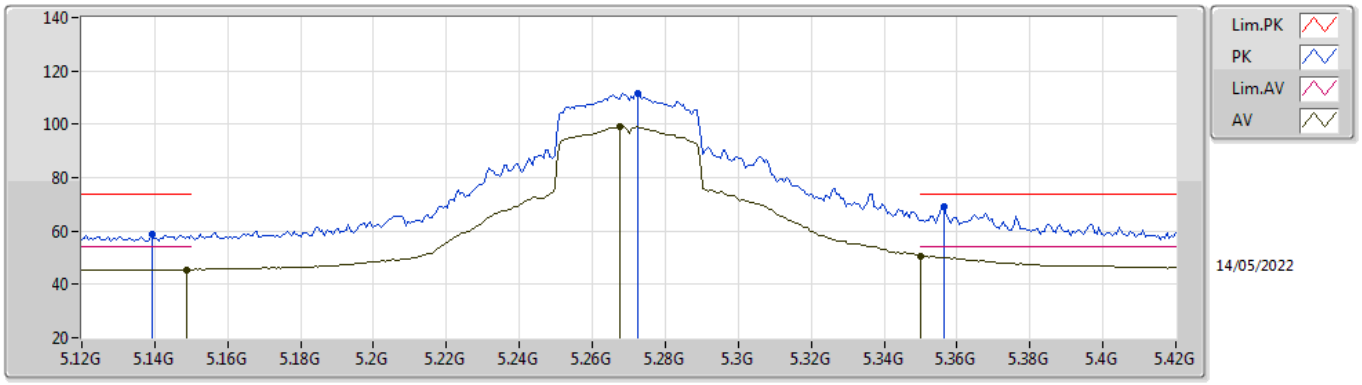


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1392G	58.83	74.00	-15.17	53.02	3	Vertical	311	1.88	-	33.98	7.17	35.34
AV	5.1488G	45.58	54.00	-8.42	39.75	3	Vertical	311	1.88	-	34.00	7.17	35.34
PK	5.2724G	111.49	Inf	-Inf	105.19	3	Vertical	311	1.88	-	34.44	7.20	35.34
AV	5.2676G	99.04	Inf	-Inf	92.74	3	Vertical	311	1.88	-	34.44	7.20	35.34
PK	5.3564G	68.96	74.00	-5.04	62.59	3	Vertical	311	1.88	-	34.51	7.20	35.34
AV	5.35G	50.74	54.00	-3.26	44.38	3	Vertical	311	1.88	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5270MHz_TnomVnom

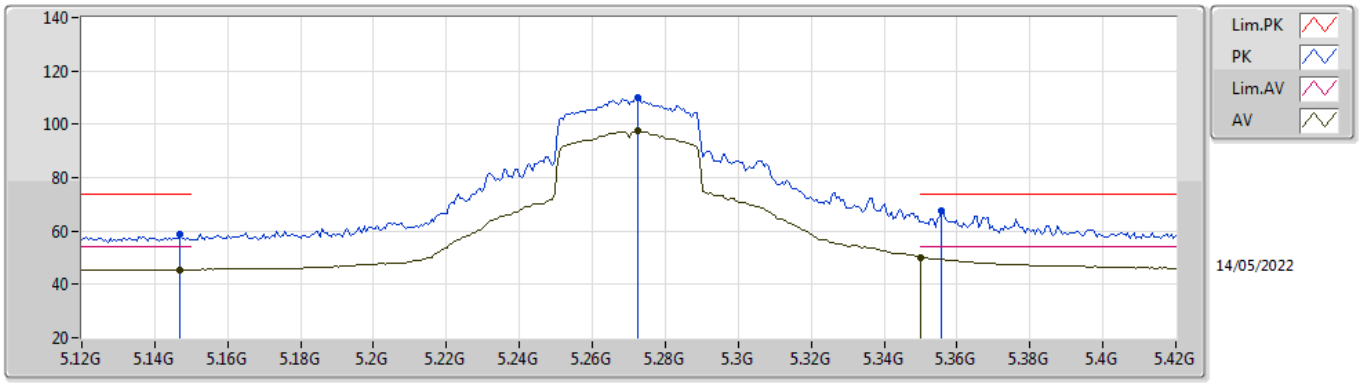


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.147G	58.80	74.00	-15.20	52.98	3	Horizontal	201	1.95	-	33.99	7.17	35.34
AV	5.147G	45.60	54.00	-8.40	39.78	3	Horizontal	201	1.95	-	33.99	7.17	35.34
PK	5.2724G	109.98	Inf	-Inf	103.68	3	Horizontal	201	1.95	-	34.44	7.20	35.34
AV	5.2724G	97.43	Inf	-Inf	91.13	3	Horizontal	201	1.95	-	34.44	7.20	35.34
PK	5.3558G	67.47	74.00	-6.53	61.10	3	Horizontal	201	1.95	-	34.51	7.20	35.34
AV	5.35G	49.95	54.00	-4.05	43.59	3	Horizontal	201	1.95	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5270MHz_TnomVnom

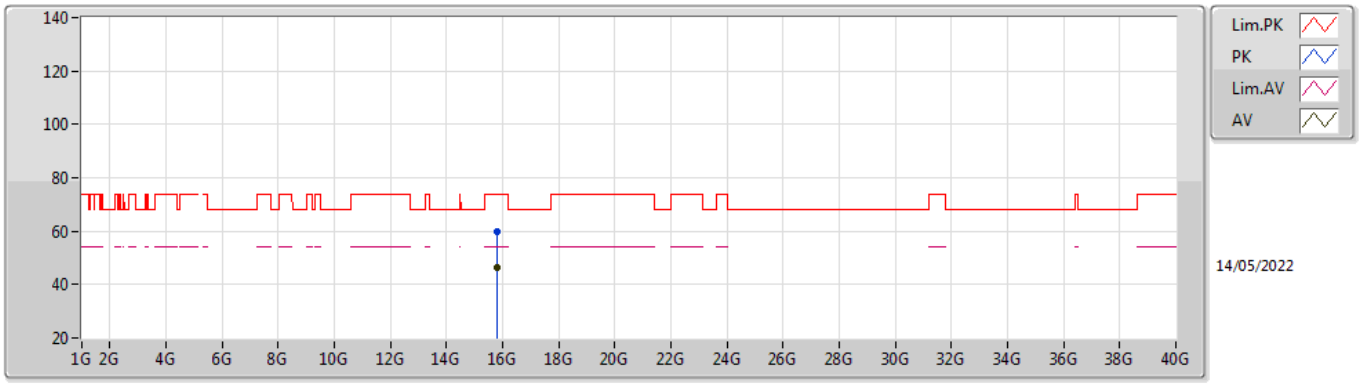


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.80496G	59.84	74.00	-14.16	44.28	3	Vertical	127	1.48	-	37.89	13.30	35.63
AV	15.79554G	46.55	54.00	-7.45	30.99	3	Vertical	127	1.48	-	37.88	13.30	35.62

802.11ax HEW40_Nss1,(MCS0)_1TX

5270MHz_TnomVnom

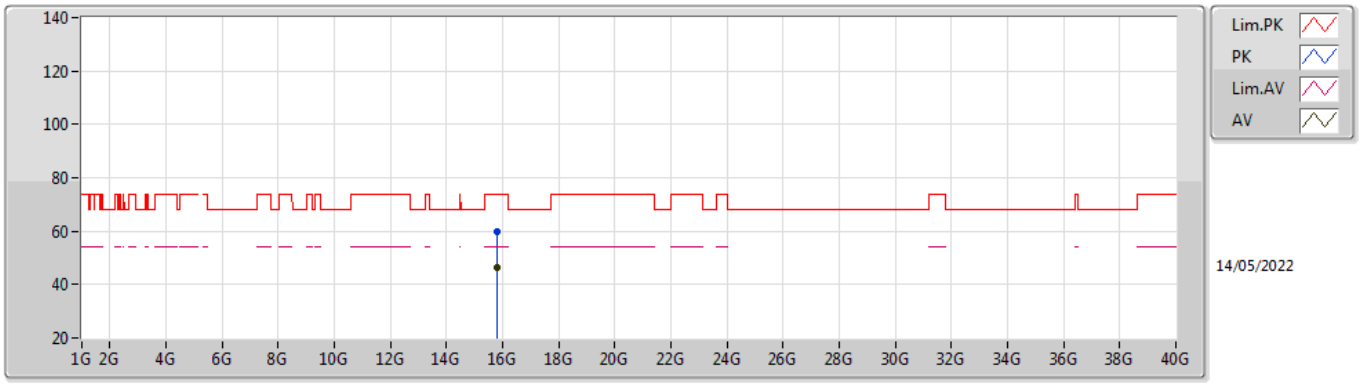


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.80406G	59.86	74.00	-14.14	44.30	3	Horizontal	317	1.36	-	37.89	13.30	35.63
AV	15.79746G	46.55	54.00	-7.45	30.98	3	Horizontal	317	1.36	-	37.89	13.30	35.62

802.11ax HEW40_Nss1,(MCS0)_1TX

5310MHz_TnomVnom

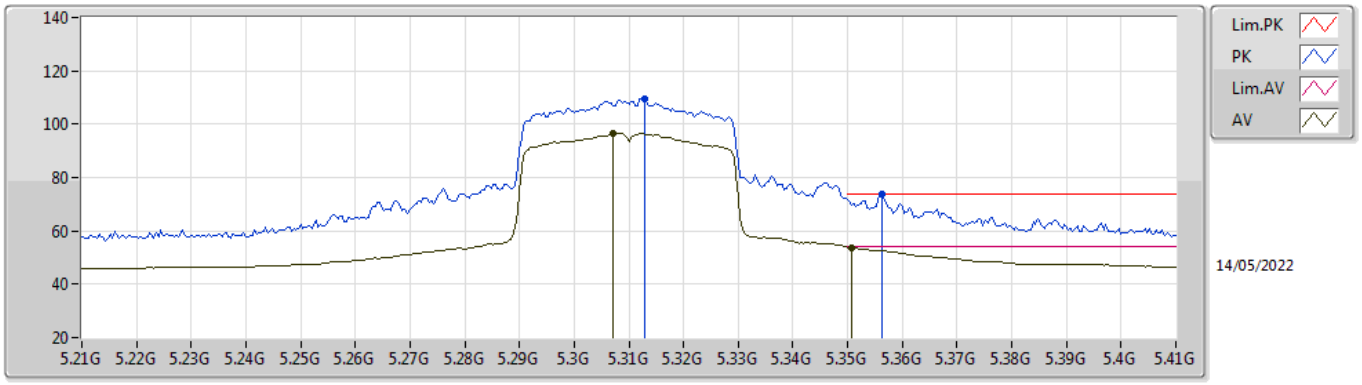


EUT X_1TX
Setting 16.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3128G	109.34	Inf	-Inf	102.98	3	Vertical	74	1.24	-	34.50	7.20	35.34
AV	5.3072G	96.64	Inf	-Inf	90.28	3	Vertical	74	1.24	-	34.50	7.20	35.34
PK	5.3564G	73.70	74.00	-0.30	67.33	3	Vertical	74	1.24	-	34.51	7.20	35.34
AV	5.3508G	53.87	54.00	-0.13	47.51	3	Vertical	74	1.24	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5310MHz_TnomVnom

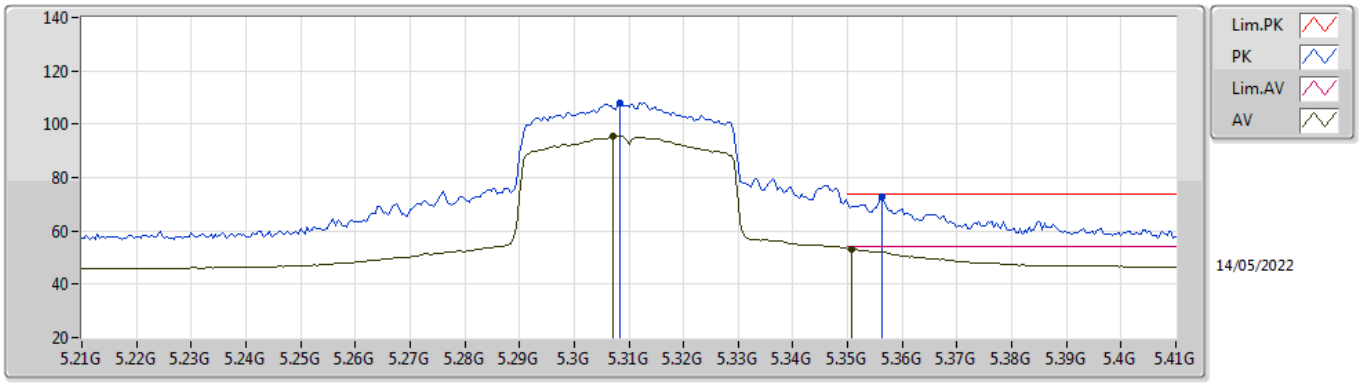


EUT X_1TX
Setting 16.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3084G	107.97	Inf	-Inf	101.61	3	Horizontal	201	2.06	-	34.50	7.20	35.34
AV	5.3072G	95.60	Inf	-Inf	89.24	3	Horizontal	201	2.06	-	34.50	7.20	35.34
PK	5.3564G	72.82	74.00	-1.18	66.45	3	Horizontal	201	2.06	-	34.51	7.20	35.34
AV	5.3508G	53.25	54.00	-0.75	46.89	3	Horizontal	201	2.06	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5310MHz_TnomVnom

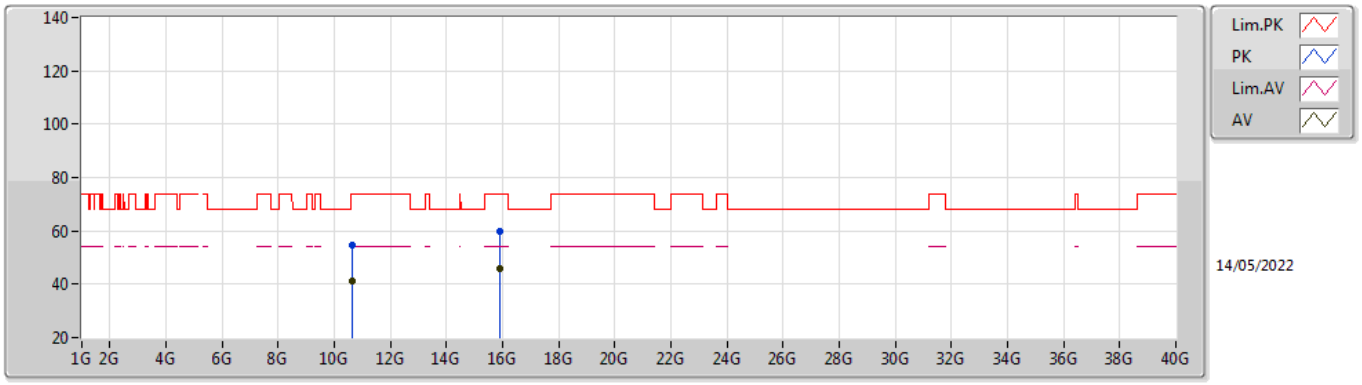


EUT X_1TX
Setting 16.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.62306G	54.53	74.00	-19.47	41.05	3	Vertical	262	1.60	-	38.25	10.59	35.36
AV	10.62966G	40.99	54.00	-13.01	27.50	3	Vertical	262	1.60	-	38.26	10.59	35.36
PK	15.91938G	60.05	74.00	-13.95	44.85	3	Vertical	92	1.51	-	37.56	13.36	35.72
AV	15.9228G	45.98	54.00	-8.02	30.80	3	Vertical	92	1.51	-	37.55	13.36	35.73

802.11ax HEW40_Nss1,(MCS0)_1TX

5310MHz_TnomVnom

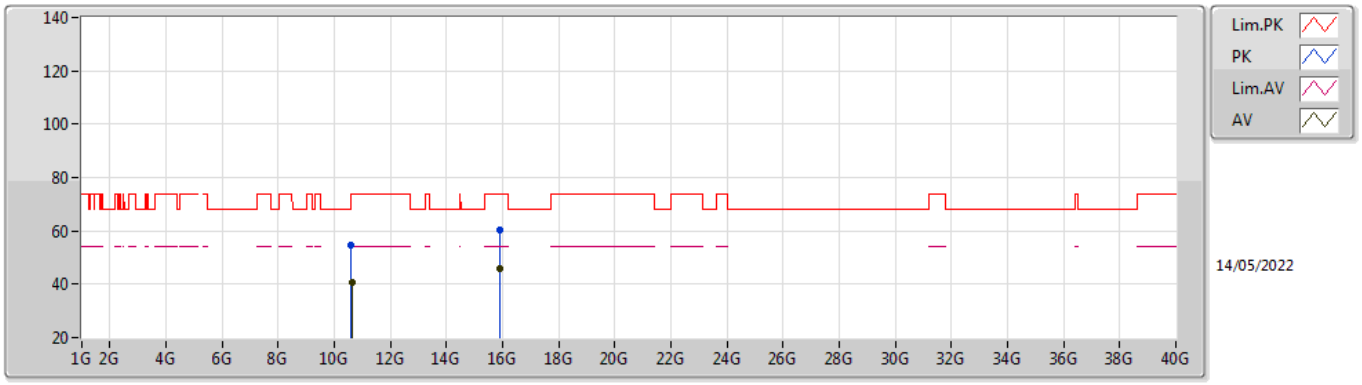


EUT X_1TX
Setting 16.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60998G	54.63	74.00	-19.37	41.20	3	Horizontal	15	2.74	-	38.22	10.59	35.38
AV	10.62462G	40.87	54.00	-13.13	27.39	3	Horizontal	15	2.74	-	38.25	10.59	35.36
PK	15.9246G	60.24	74.00	-13.76	45.06	3	Horizontal	220	2.00	-	37.55	13.36	35.73
AV	15.915G	46.06	54.00	-7.94	30.85	3	Horizontal	220	2.00	-	37.57	13.36	35.72

802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TnomVnom

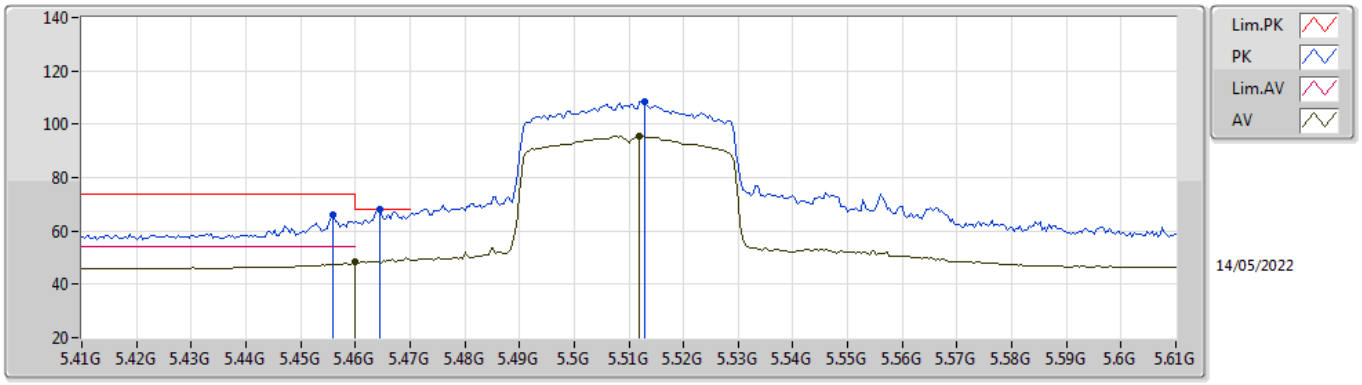


EUT X_1TX
Setting 16.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.456G	65.81	74.00	-8.19	59.39	3	Vertical	320	1.89	-	34.51	7.26	35.35
AV	5.46G	48.58	54.00	-5.42	42.15	3	Vertical	320	1.89	-	34.52	7.26	35.35
PK	5.4644G	68.17	68.20	-0.03	61.73	3	Vertical	320	1.89	-	34.53	7.26	35.35
PK	5.5128G	108.36	Inf	-Inf	101.81	3	Vertical	320	1.89	-	34.60	7.31	35.36
AV	5.512G	95.54	Inf	-Inf	88.99	3	Vertical	320	1.89	-	34.60	7.31	35.36

802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TnomVnom

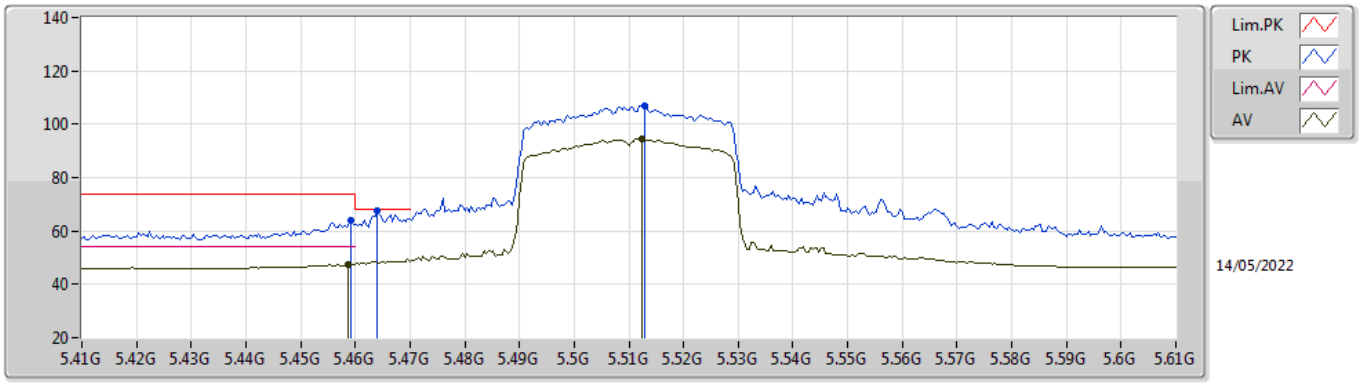


EUT X_1TX
Setting 16.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4592G	63.74	74.00	-10.26	57.31	3	Horizontal	197	1.96	-	34.52	7.26	35.35
AV	5.4588G	47.55	54.00	-6.45	41.12	3	Horizontal	197	1.96	-	34.52	7.26	35.35
PK	5.464G	67.51	68.20	-0.69	61.07	3	Horizontal	197	1.96	-	34.53	7.26	35.35
PK	5.5128G	107.11	Inf	-Inf	100.56	3	Horizontal	197	1.96	-	34.60	7.31	35.36
AV	5.5124G	94.44	Inf	-Inf	87.89	3	Horizontal	197	1.96	-	34.60	7.31	35.36

802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TnomVnom

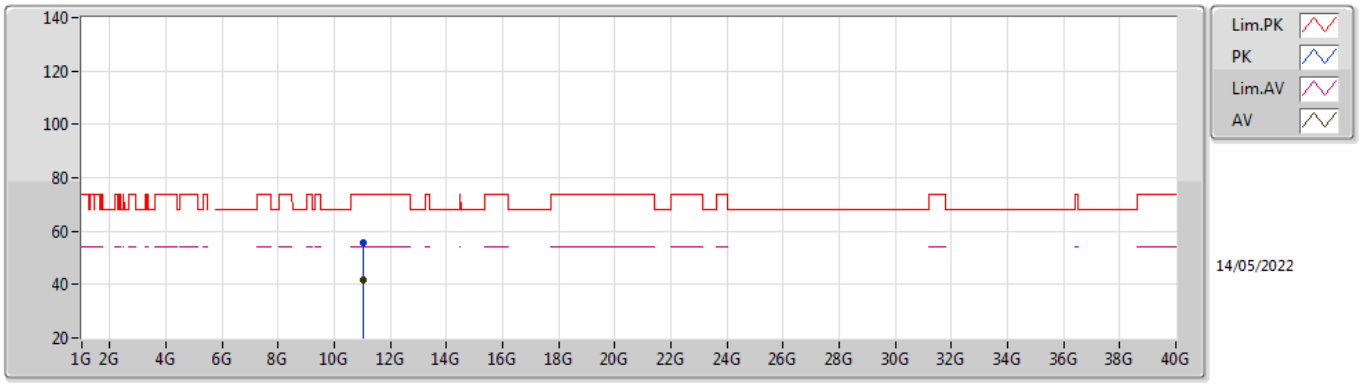


EUT X_1TX
Setting 16.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.02906G	55.56	74.00	-18.44	41.55	3	Vertical	119	2.58	-	38.43	10.65	35.07
AV	11.02954G	41.67	54.00	-12.33	27.66	3	Vertical	119	2.58	-	38.43	10.65	35.07

802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TnomVnom

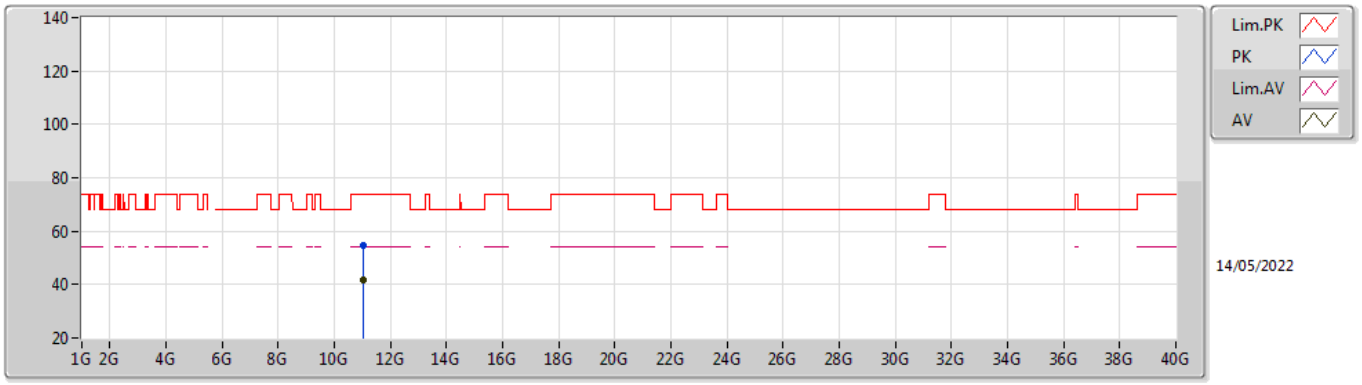


EUT X_1TX
Setting 16.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.02882G	54.80	74.00	-19.20	40.79	3	Horizontal	37	2.74	-	38.43	10.65	35.07
AV	11.03266G	41.60	54.00	-12.40	27.60	3	Horizontal	37	2.74	-	38.43	10.65	35.08

802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TnomVnom

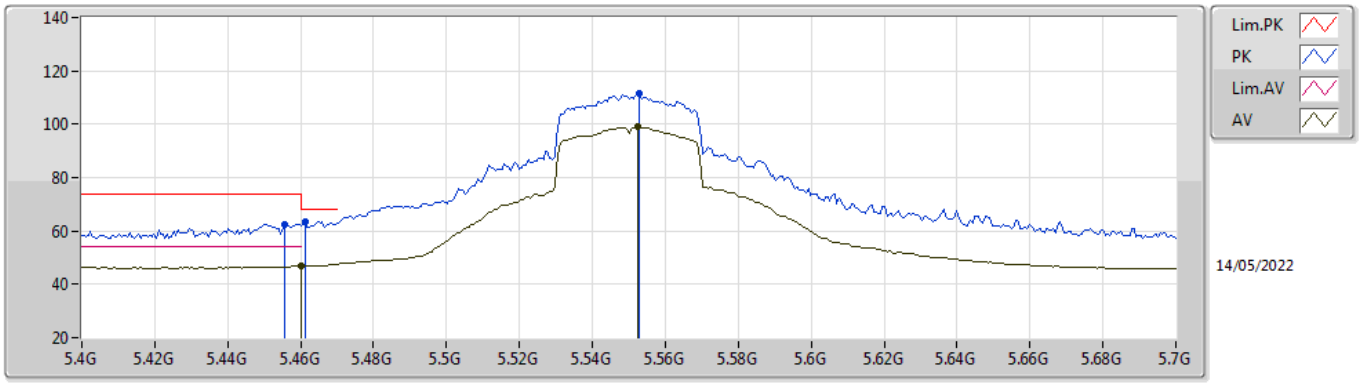


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4558G	62.55	74.00	-11.45	56.13	3	Vertical	322	2.06	-	34.51	7.26	35.35
PK	5.4612G	63.37	68.20	-4.83	56.94	3	Vertical	322	2.06	-	34.52	7.26	35.35
AV	5.46G	46.79	54.00	-7.21	40.36	3	Vertical	322	2.06	-	34.52	7.26	35.35
PK	5.553G	111.52	Inf	-Inf	104.95	3	Vertical	322	2.06	-	34.60	7.35	35.38
AV	5.5524G	99.11	Inf	-Inf	92.54	3	Vertical	322	2.06	-	34.60	7.35	35.38

802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TnomVnom

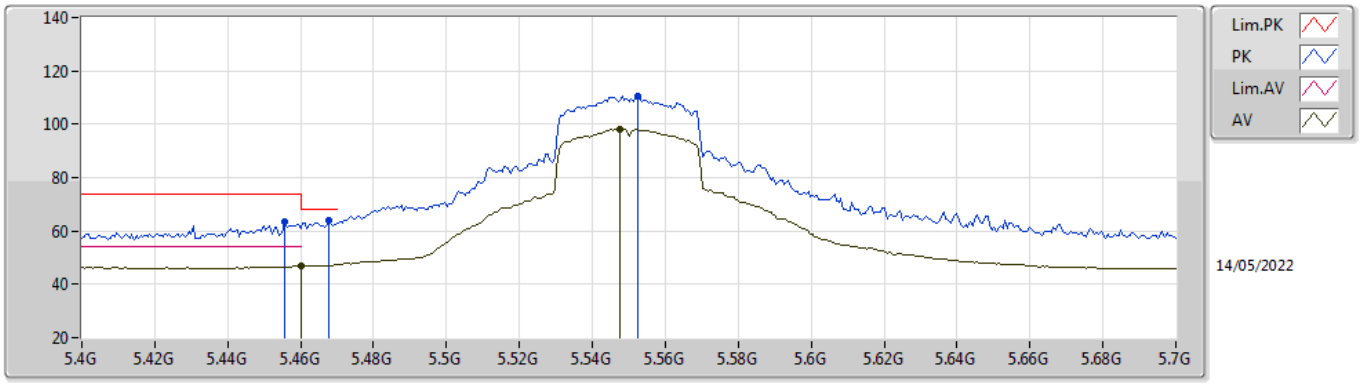


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4558G	63.44	74.00	-10.56	57.02	3	Horizontal	197	2.05	-	34.51	7.26	35.35
AV	5.46G	46.68	54.00	-7.32	40.25	3	Horizontal	197	2.05	-	34.52	7.26	35.35
PK	5.4678G	64.06	68.20	-4.14	57.60	3	Horizontal	197	2.05	-	34.54	7.27	35.35
PK	5.5524G	110.50	Inf	-Inf	103.93	3	Horizontal	197	2.05	-	34.60	7.35	35.38
AV	5.5476G	98.35	Inf	-Inf	91.77	3	Horizontal	197	2.05	-	34.60	7.35	35.37

802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TnomVnom

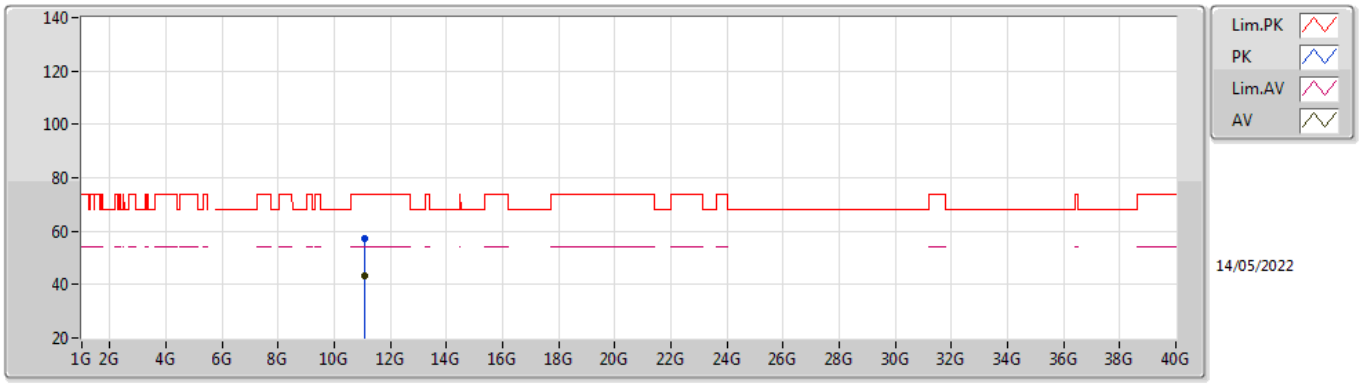


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.10354G	57.30	74.00	-16.70	43.29	3	Vertical	174	1.93	-	38.50	10.67	35.16
AV	11.10492G	43.14	54.00	-10.86	29.13	3	Vertical	174	1.93	-	38.50	10.67	35.16

802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TnomVnom

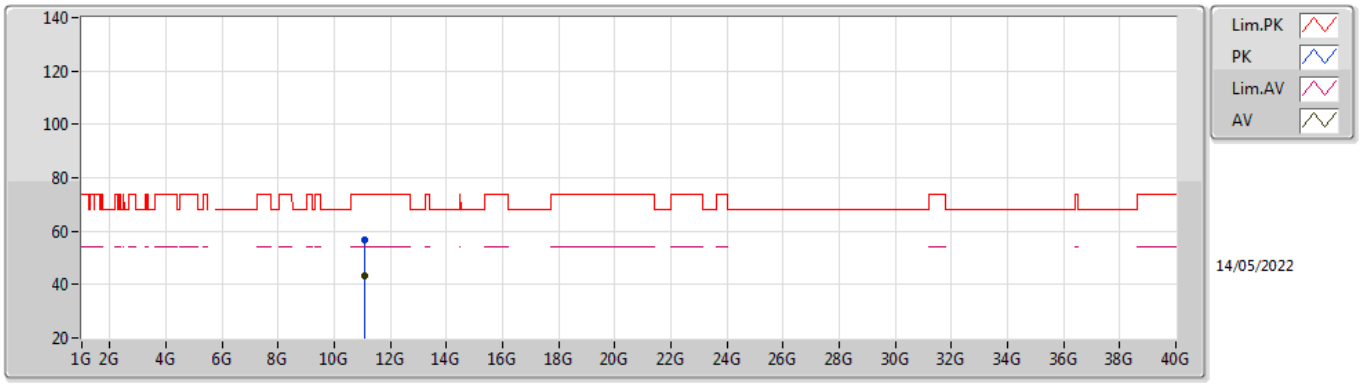


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.09658G	56.47	74.00	-17.53	42.46	3	Horizontal	329	1.67	-	38.50	10.66	35.15
AV	11.09574G	43.05	54.00	-10.95	29.04	3	Horizontal	329	1.67	-	38.50	10.66	35.15

802.11ax HEW40_Nss1,(MCS0)_1TX

5670MHz_TnomVnom

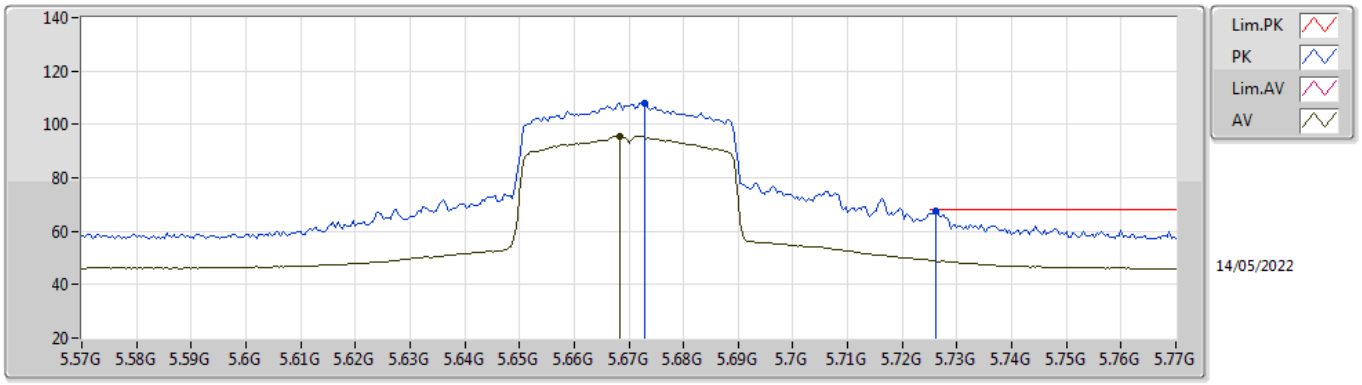


EUT X_1TX
Setting 16
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6728G	108.11	Inf	-Inf	101.74	3	Vertical	330	1.94	-	34.41	7.40	35.44
AV	5.6684G	95.44	Inf	-Inf	89.04	3	Vertical	330	1.94	-	34.43	7.40	35.43
PK	5.726G	67.68	68.20	-0.52	61.49	3	Vertical	330	1.94	-	34.25	7.40	35.46

802.11ax HEW40_Nss1,(MCS0)_1TX

5670MHz_TnomVnom

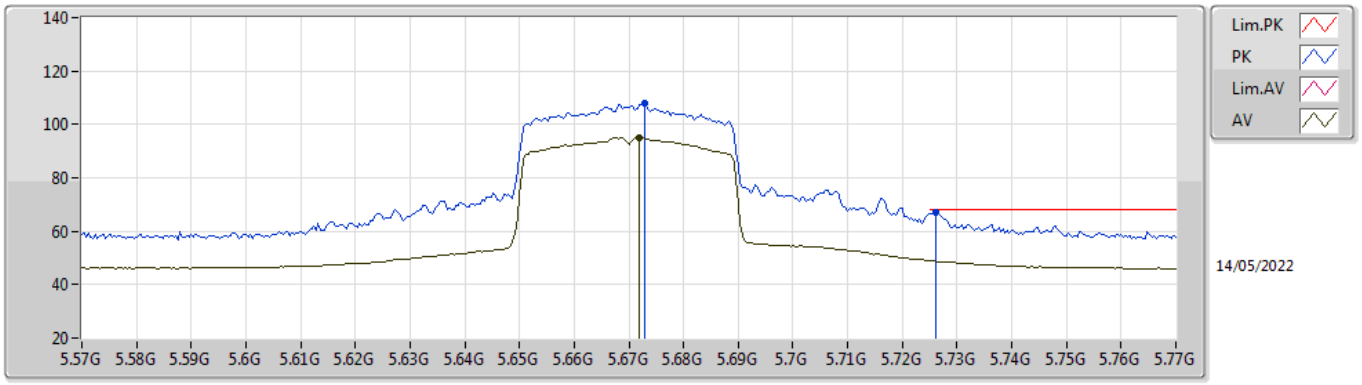


EUT X_1TX
Setting 16
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6728G	107.69	Inf	-Inf	101.32	3	Horizontal	196	2.06	-	34.41	7.40	35.44
AV	5.672G	94.87	Inf	-Inf	88.50	3	Horizontal	196	2.06	-	34.41	7.40	35.44
PK	5.726G	66.99	68.20	-1.21	60.80	3	Horizontal	196	2.06	-	34.25	7.40	35.46

802.11ax HEW40_Nss1,(MCS0)_1TX

5670MHz_TnomVnom

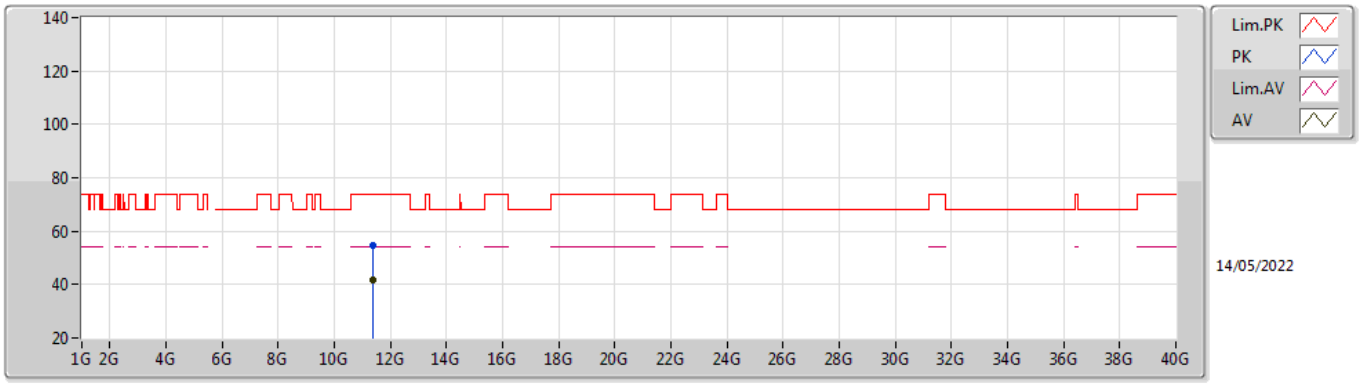


EUT X_1TX
Setting 16
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.35452G	54.80	74.00	-19.20	40.79	3	Vertical	211	2.42	-	38.75	10.70	35.44
AV	11.3547G	41.53	54.00	-12.47	27.52	3	Vertical	211	2.42	-	38.75	10.70	35.44

802.11ax HEW40_Nss1,(MCS0)_1TX

5670MHz_TnomVnom

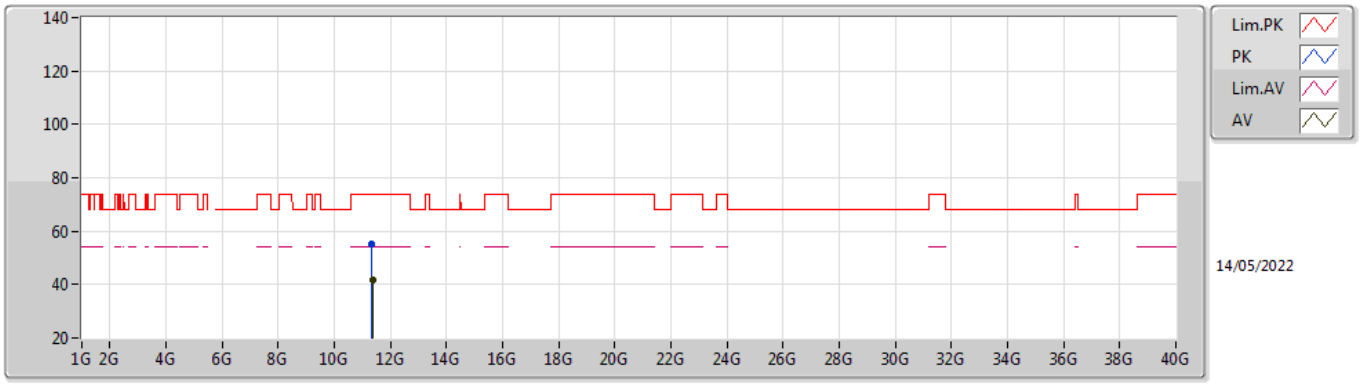


EUT X_1TX
Setting 16
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.32752G	55.22	74.00	-18.78	41.20	3	Horizontal	147	1.99	-	38.73	10.70	35.41
AV	11.35452G	41.47	54.00	-12.53	27.46	3	Horizontal	147	1.99	-	38.75	10.70	35.44

802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

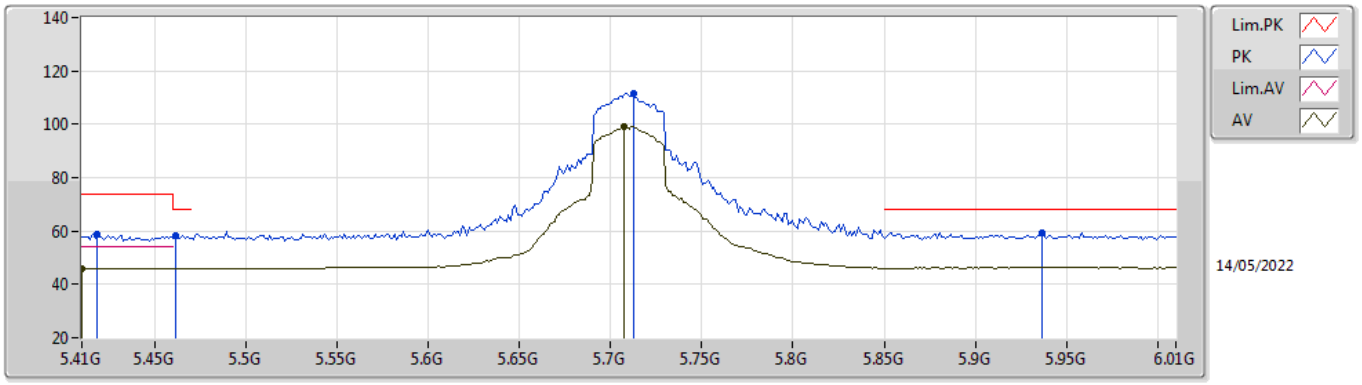


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4184G	58.96	74.00	-15.04	52.53	3	Vertical	326	2.10	-	34.56	7.22	35.35
AV	5.41G	46.08	54.00	-7.92	39.64	3	Vertical	326	2.10	-	34.58	7.21	35.35
PK	5.4616G	58.48	68.20	-9.72	52.05	3	Vertical	326	2.10	-	34.52	7.26	35.35
PK	5.7124G	111.59	Inf	-Inf	105.37	3	Vertical	326	2.10	-	34.28	7.40	35.46
AV	5.7076G	99.19	Inf	-Inf	92.96	3	Vertical	326	2.10	-	34.28	7.40	35.45
PK	5.9368G	59.40	68.20	-8.80	52.68	3	Vertical	326	2.10	-	34.75	7.54	35.57

802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

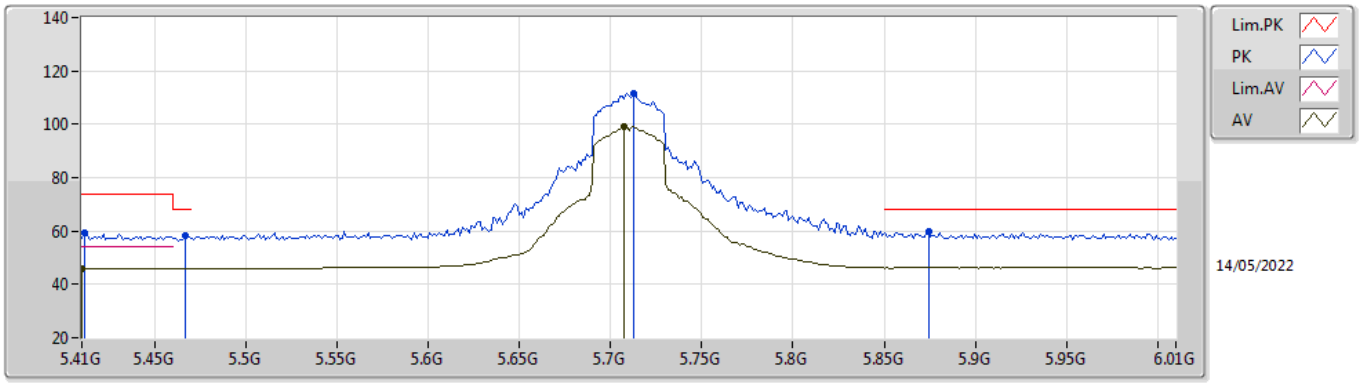


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4112G	59.48	74.00	-14.52	53.04	3	Horizontal	191	2.06	-	34.58	7.21	35.35
AV	5.41G	46.06	54.00	-7.94	39.62	3	Horizontal	191	2.06	-	34.58	7.21	35.35
PK	5.4664G	58.18	68.20	-10.02	51.73	3	Horizontal	191	2.06	-	34.53	7.27	35.35
PK	5.7124G	111.37	Inf	-Inf	105.15	3	Horizontal	191	2.06	-	34.28	7.40	35.46
AV	5.7076G	99.08	Inf	-Inf	92.85	3	Horizontal	191	2.06	-	34.28	7.40	35.45
PK	5.8744G	59.62	68.20	-8.58	53.24	3	Horizontal	191	2.06	-	34.45	7.47	35.54

802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

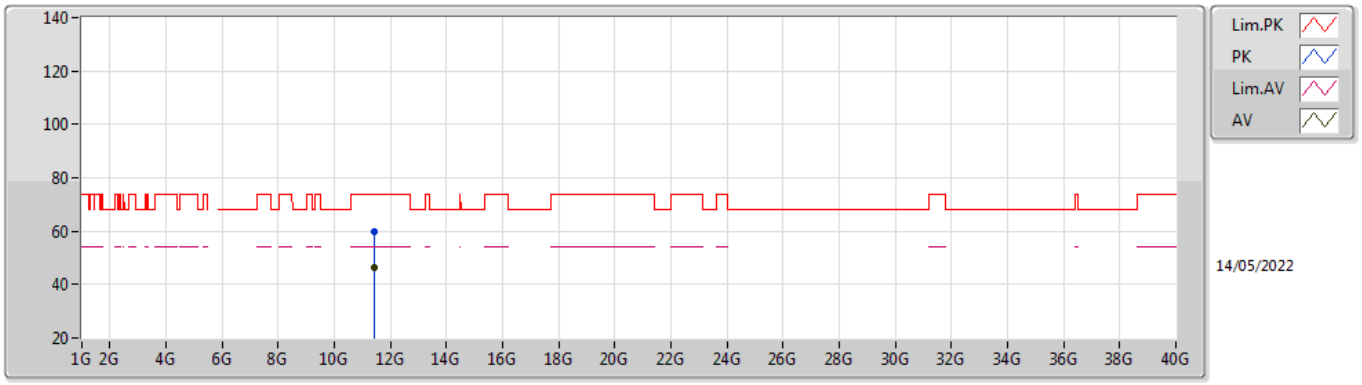


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.42348G	59.58	74.00	-14.42	45.53	3	Vertical	196	2.62	-	38.85	10.71	35.51
AV	11.41586G	46.31	54.00	-7.69	32.28	3	Vertical	196	2.62	-	38.83	10.71	35.51

802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

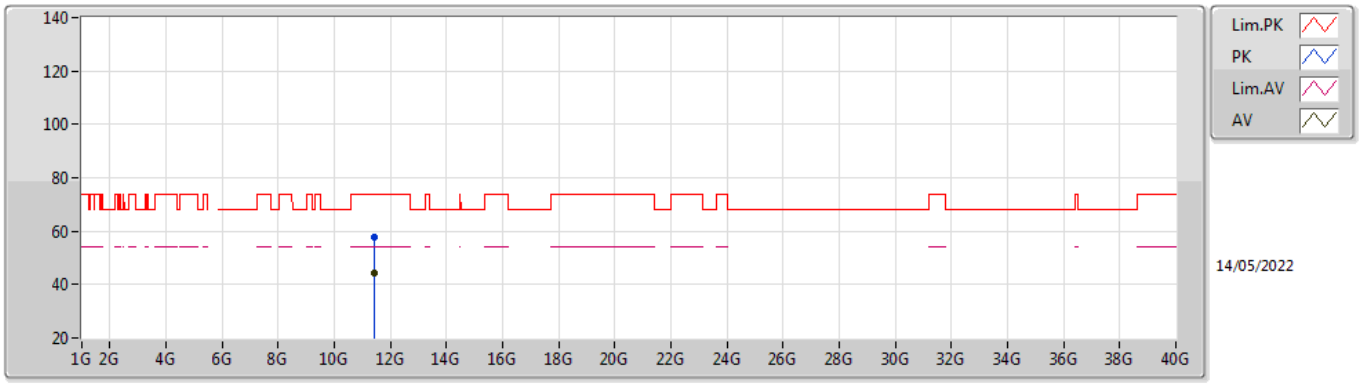


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.42042G	57.71	74.00	-16.29	43.67	3	Horizontal	58	1.74	-	38.84	10.71	35.51
AV	11.4158G	44.39	54.00	-9.61	30.36	3	Horizontal	58	1.74	-	38.83	10.71	35.51

802.11ax HEW40_Nss1,(MCS0)_1TX

5755MHz_TnomVnom

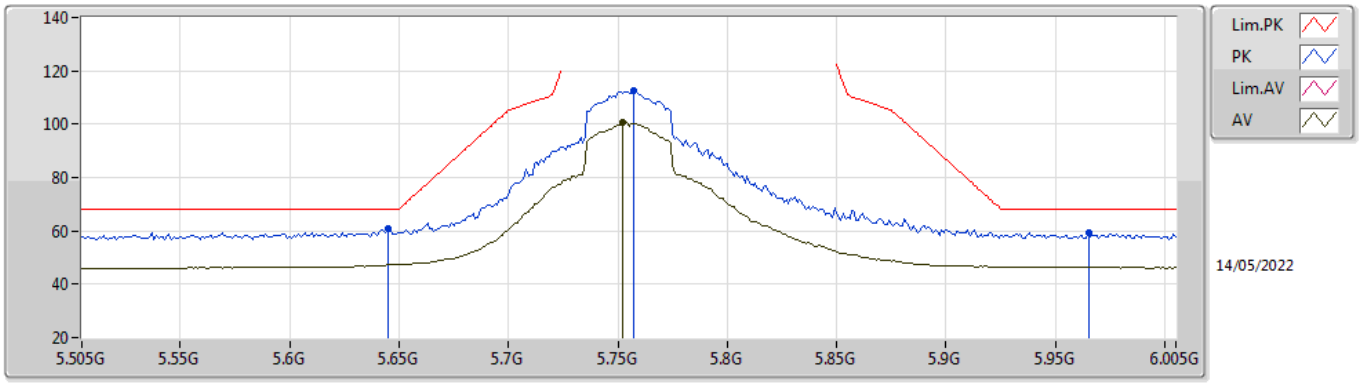


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.645G	60.70	68.20	-7.50	54.21	3	Vertical	333	2.06	-	34.51	7.40	35.42
PK	5.757G	112.52	Inf	-Inf	106.40	3	Vertical	333	2.06	-	34.20	7.40	35.48
AV	5.752G	100.56	Inf	-Inf	94.44	3	Vertical	333	2.06	-	34.20	7.40	35.48
PK	5.965G	59.53	68.20	-8.67	52.75	3	Vertical	333	2.06	-	34.80	7.56	35.58

802.11ax HEW40_Nss1,(MCS0)_1TX

5755MHz_TnomVnom

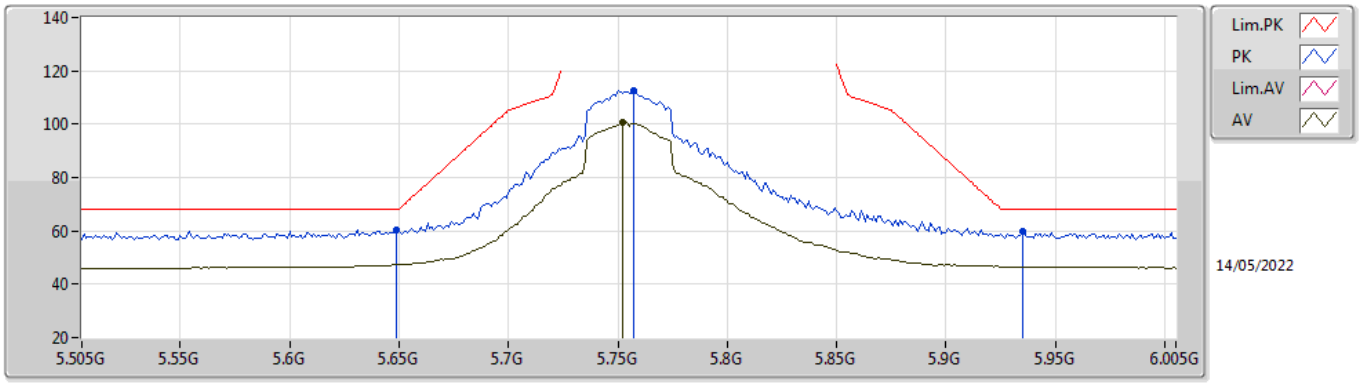


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.649G	60.49	68.20	-7.71	54.01	3	Horizontal	192	2.02	-	34.50	7.40	35.42
PK	5.757G	112.51	Inf	-Inf	106.39	3	Horizontal	192	2.02	-	34.20	7.40	35.48
AV	5.752G	100.74	Inf	-Inf	94.62	3	Horizontal	192	2.02	-	34.20	7.40	35.48
PK	5.935G	59.72	68.20	-8.48	53.01	3	Horizontal	192	2.02	-	34.74	7.54	35.57

802.11ax HEW40_Nss1,(MCS0)_1TX

5755MHz_TnomVnom

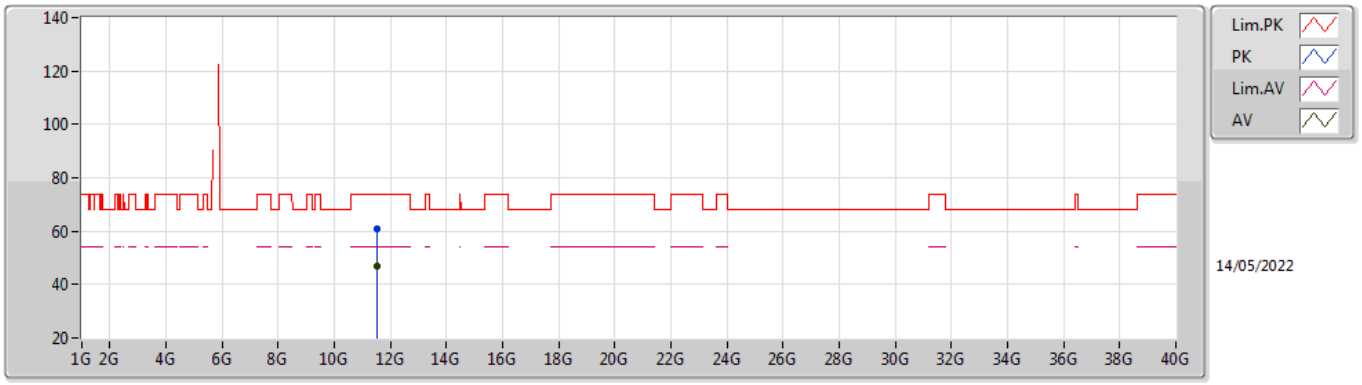


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.51054G	60.86	74.00	-13.14	46.69	3	Vertical	189	2.40	-	39.04	10.73	35.60
AV	11.5058G	46.99	54.00	-7.01	32.84	3	Vertical	189	2.40	-	39.02	10.73	35.60

802.11ax HEW40_Nss1,(MCS0)_1TX

5755MHz_TnomVnom

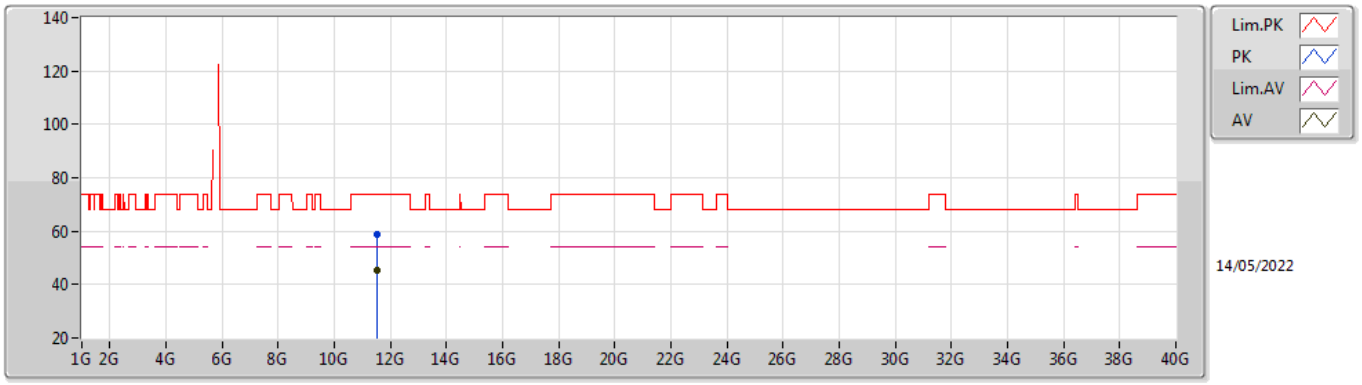


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.51282G	58.84	74.00	-15.16	44.66	3	Horizontal	184	2.10	-	39.05	10.73	35.60
AV	11.50574G	45.19	54.00	-8.81	31.04	3	Horizontal	184	2.10	-	39.02	10.73	35.60

802.11ax HEW40_Nss1,(MCS0)_1TX

5795MHz_TnomVnom

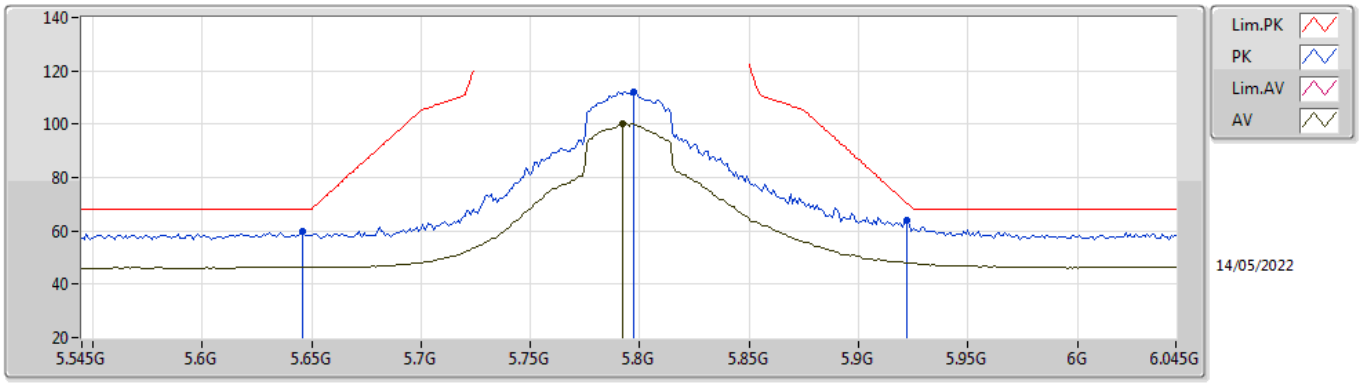


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.646G	59.83	68.20	-8.37	53.34	3	Vertical	334	1.94	-	34.51	7.40	35.42
PK	5.797G	112.31	Inf	-Inf	106.21	3	Vertical	334	1.94	-	34.20	7.40	35.50
AV	5.792G	100.42	Inf	-Inf	94.32	3	Vertical	334	1.94	-	34.20	7.40	35.50
PK	5.922G	63.79	70.42	-6.63	57.14	3	Vertical	334	1.94	-	34.69	7.52	35.56

802.11ax HEW40_Nss1,(MCS0)_1TX

5795MHz_TnomVnom

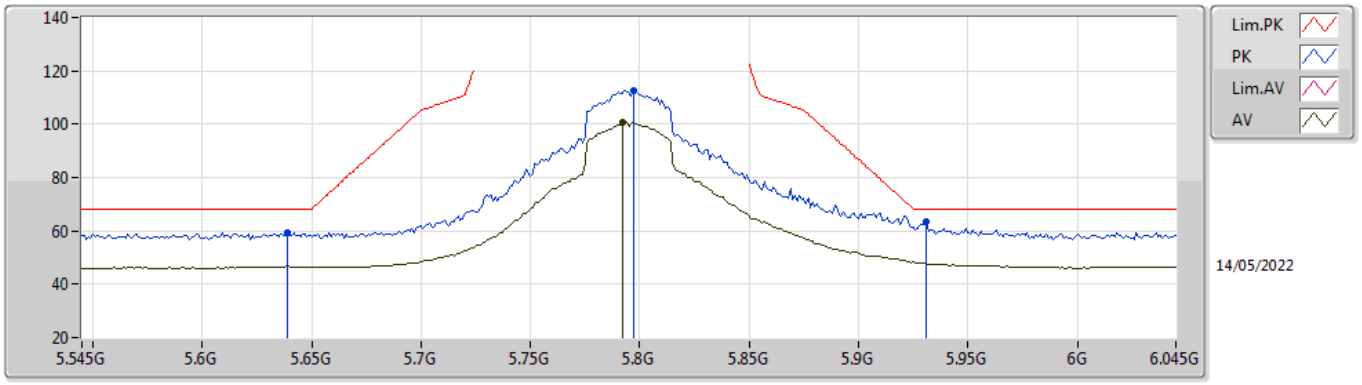


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.639G	59.27	68.20	-8.93	52.77	3	Horizontal	191	2.05	-	34.52	7.40	35.42
PK	5.797G	112.71	Inf	-Inf	106.61	3	Horizontal	191	2.05	-	34.20	7.40	35.50
AV	5.792G	100.69	Inf	-Inf	94.59	3	Horizontal	191	2.05	-	34.20	7.40	35.50
PK	5.931G	63.21	68.20	-4.99	56.53	3	Horizontal	191	2.05	-	34.72	7.53	35.57

802.11ax HEW40_Nss1,(MCS0)_1TX

5795MHz_TnomVnom

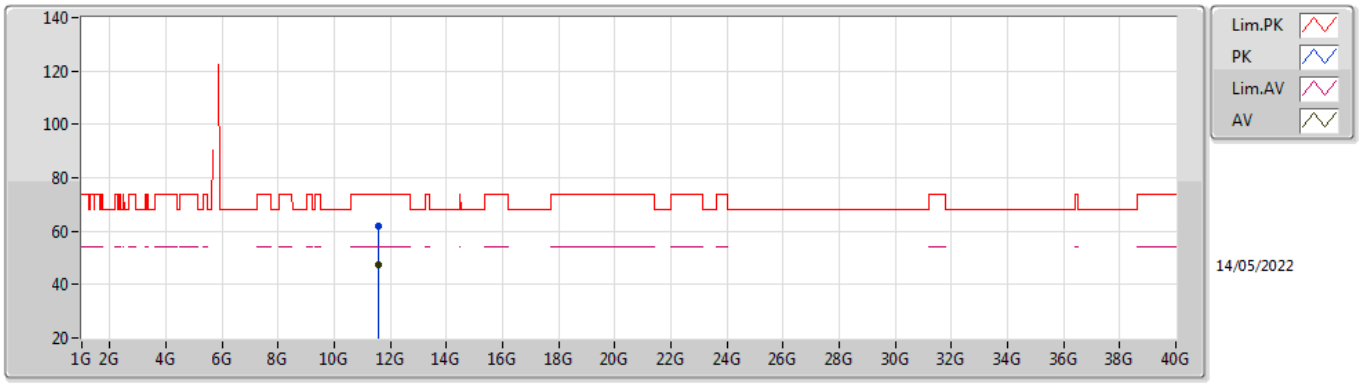


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5816G	62.08	74.00	-11.92	47.59	3	Vertical	188	2.43	-	39.33	10.74	35.58
AV	11.58574G	47.34	54.00	-6.66	32.84	3	Vertical	188	2.43	-	39.34	10.74	35.58

802.11ax HEW40_Nss1,(MCS0)_1TX

5795MHz_TnomVnom

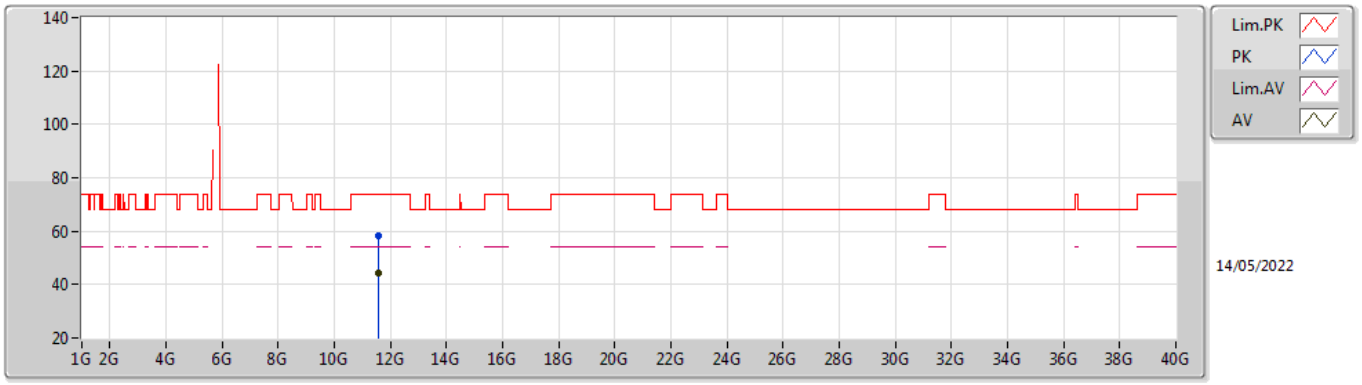


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.59504G	58.46	74.00	-15.54	43.92	3	Horizontal	196	1.80	-	39.38	10.74	35.58
AV	11.5858G	44.42	54.00	-9.58	29.92	3	Horizontal	196	1.80	-	39.34	10.74	35.58

802.11ax HEW80_Nss1,(MCS0)_1TX

5210MHz_TnomVnom

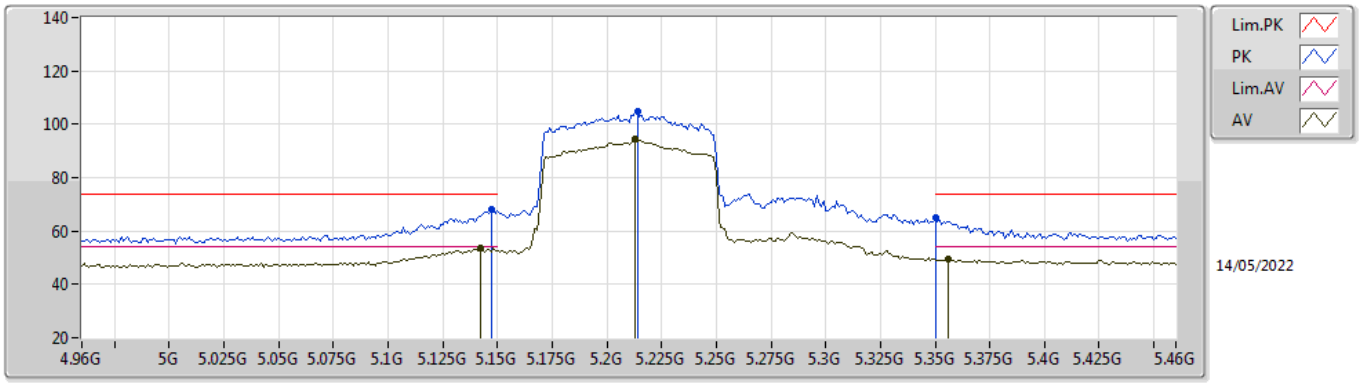


EUT X_1TX
Setting 15.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.147G	68.26	74.00	-5.74	62.44	3	Vertical	297	2.16	-	33.99	7.17	35.34
AV	5.142G	53.76	54.00	-0.24	47.95	3	Vertical	297	2.16	-	33.98	7.17	35.34
PK	5.214G	104.65	Inf	-Inf	98.53	3	Vertical	297	2.16	-	34.26	7.20	35.34
AV	5.213G	94.23	Inf	-Inf	88.12	3	Vertical	297	2.16	-	34.25	7.20	35.34
PK	5.35G	64.81	74.00	-9.19	58.45	3	Vertical	297	2.16	-	34.50	7.20	35.34
AV	5.356G	49.27	54.00	-4.73	42.90	3	Vertical	297	2.16	-	34.51	7.20	35.34

802.11ax HEW80_Nss1,(MCS0)_1TX

5210MHz_TnomVnom

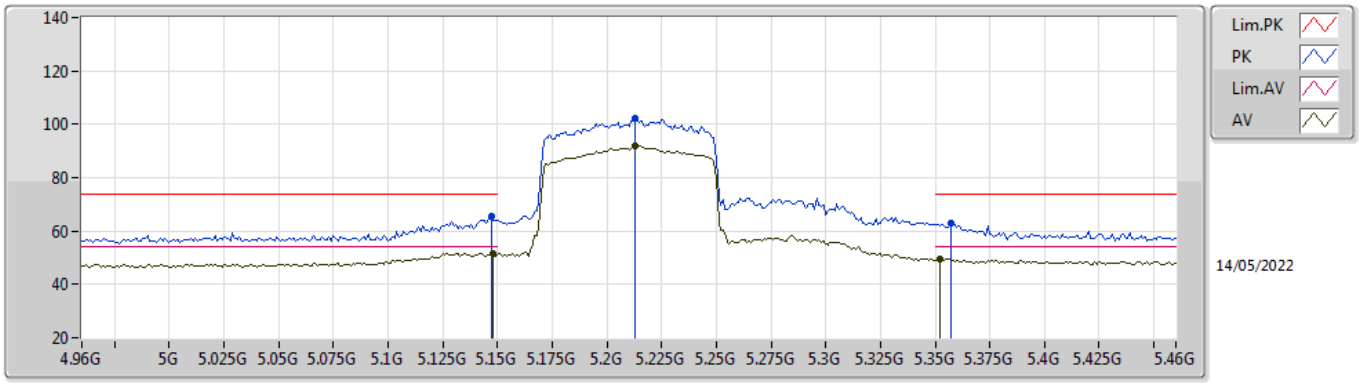


EUT X_1TX
Setting 15.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.147G	65.40	74.00	-8.60	59.58	3	Horizontal	201	2.00	-	33.99	7.17	35.34
AV	5.148G	51.63	54.00	-2.37	45.80	3	Horizontal	201	2.00	-	34.00	7.17	35.34
PK	5.213G	102.20	Inf	-Inf	96.09	3	Horizontal	201	2.00	-	34.25	7.20	35.34
AV	5.213G	91.86	Inf	-Inf	85.75	3	Horizontal	201	2.00	-	34.25	7.20	35.34
PK	5.357G	62.92	74.00	-11.08	56.55	3	Horizontal	201	2.00	-	34.51	7.20	35.34
AV	5.352G	49.62	54.00	-4.38	43.26	3	Horizontal	201	2.00	-	34.50	7.20	35.34

802.11ax HEW80_Nss1,(MCS0)_1TX

5210MHz_TnomVnom

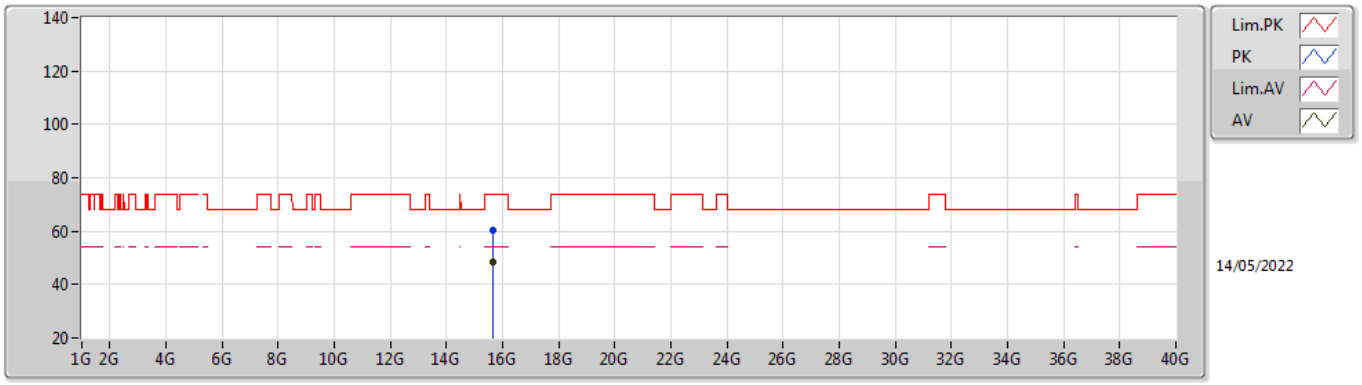


EUT X_1TX
Setting 15.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6396G	60.27	74.00	-13.73	44.74	3	Vertical	260	2.37	-	37.80	13.22	35.49
AV	15.64206G	48.59	54.00	-5.41	33.07	3	Vertical	260	2.37	-	37.79	13.22	35.49

802.11ax HEW80_Nss1,(MCS0)_1TX

5210MHz_TnomVnom

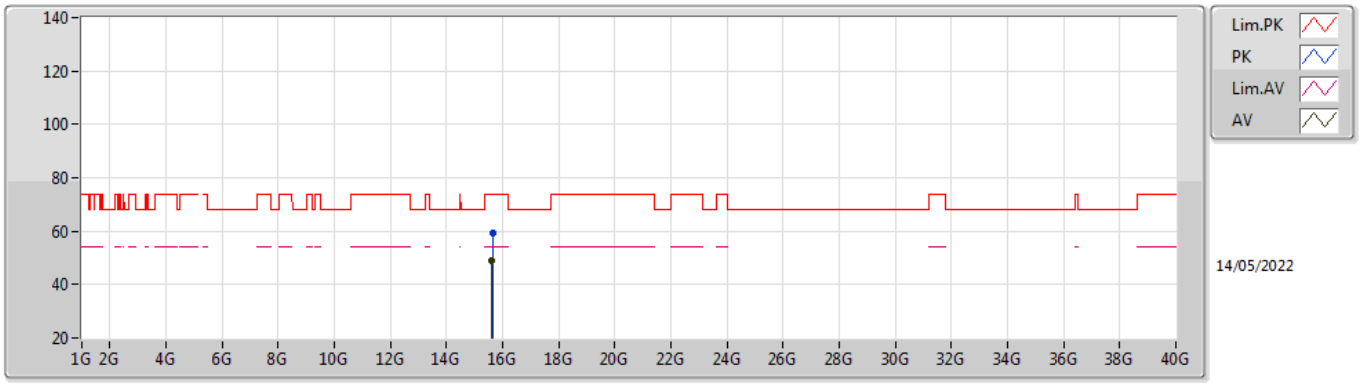


EUT X_1TX
Setting 15.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6375G	59.17	74.00	-14.83	43.63	3	Horizontal	323	1.06	-	37.81	13.22	35.49
AV	15.61782G	49.05	54.00	-4.95	33.40	3	Horizontal	323	1.06	-	37.91	13.21	35.47

802.11ax HEW80_Nss1,(MCS0)_1TX

5290MHz_TnomVnom

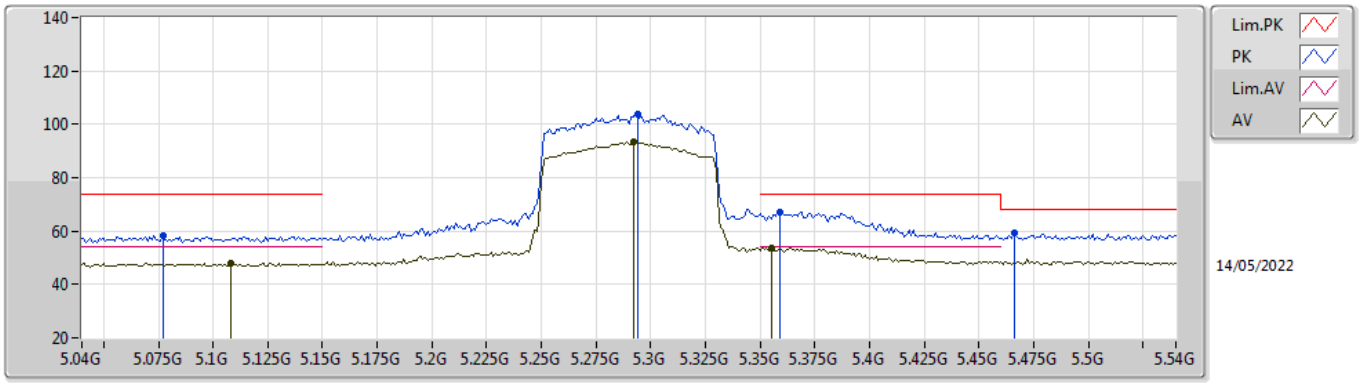


EUT X_1TX
Setting 14.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.077G	58.33	74.00	-15.67	52.67	3	Vertical	312	1.98	-	33.85	7.14	35.33
AV	5.108G	48.12	54.00	-5.88	42.38	3	Vertical	312	1.98	-	33.92	7.15	35.33
PK	5.294G	103.83	Inf	-Inf	97.48	3	Vertical	312	1.98	-	34.49	7.20	35.34
AV	5.292G	93.37	Inf	-Inf	87.03	3	Vertical	312	1.98	-	34.48	7.20	35.34
PK	5.359G	67.15	74.00	-6.85	60.77	3	Vertical	312	1.98	-	34.52	7.20	35.34
AV	5.355G	53.62	54.00	-0.38	47.25	3	Vertical	312	1.98	-	34.51	7.20	35.34
PK	5.466G	59.23	68.20	-8.97	52.78	3	Vertical	312	1.98	-	34.53	7.27	35.35

802.11ax HEW80_Nss1,(MCS0)_1TX

5290MHz_TnomVnom

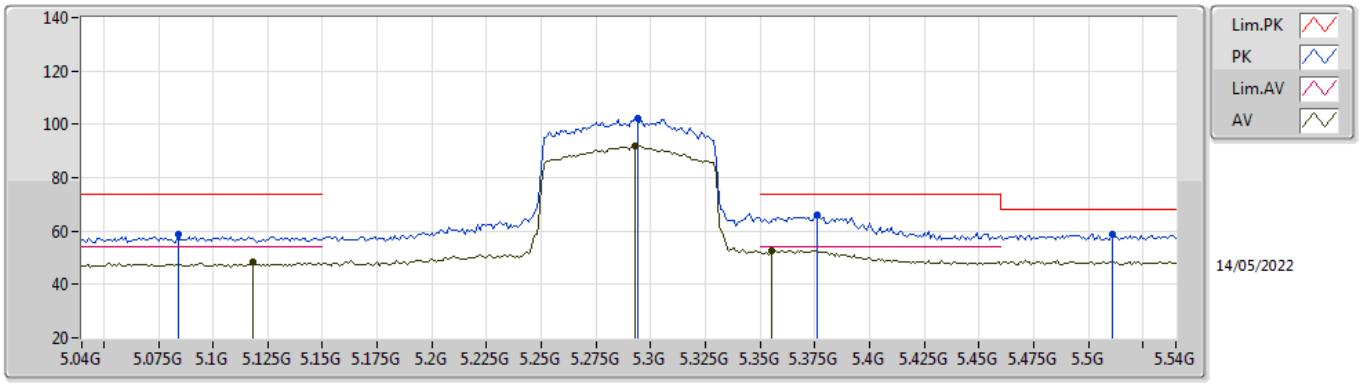


EUT X_1TX
Setting 14.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.084G	58.65	74.00	-15.35	52.97	3	Horizontal	200	1.98	-	33.87	7.14	35.33
AV	5.118G	48.23	54.00	-5.77	42.46	3	Horizontal	200	1.98	-	33.94	7.16	35.33
PK	5.294G	102.43	Inf	-Inf	96.08	3	Horizontal	200	1.98	-	34.49	7.20	35.34
AV	5.293G	92.09	Inf	-Inf	85.74	3	Horizontal	200	1.98	-	34.49	7.20	35.34
PK	5.376G	66.13	74.00	-7.87	59.73	3	Horizontal	200	1.98	-	34.55	7.20	35.35
AV	5.355G	52.80	54.00	-1.20	46.43	3	Horizontal	200	1.98	-	34.51	7.20	35.34
PK	5.511G	58.64	68.20	-9.56	52.09	3	Horizontal	200	1.98	-	34.60	7.31	35.36

802.11ax HEW80_Nss1,(MCS0)_1TX

5290MHz_TnomVnom

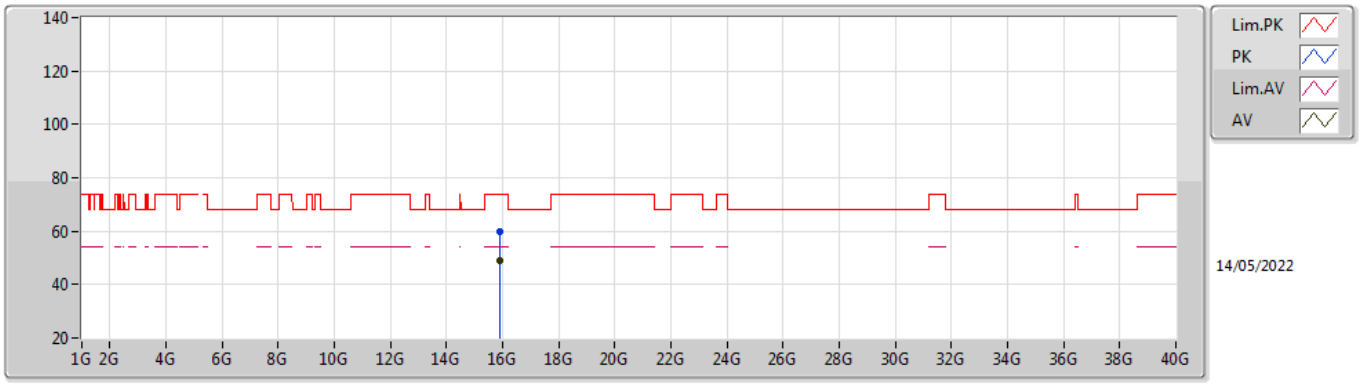


EUT X_1TX
Setting 14.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.87846G	59.97	74.00	-14.03	44.66	3	Vertical	266	2.38	-	37.66	13.34	35.69
AV	15.88188G	49.03	54.00	-4.97	33.73	3	Vertical	266	2.38	-	37.65	13.34	35.69

802.11ax HEW80_Nss1,(MCS0)_1TX

5290MHz_TnomVnom

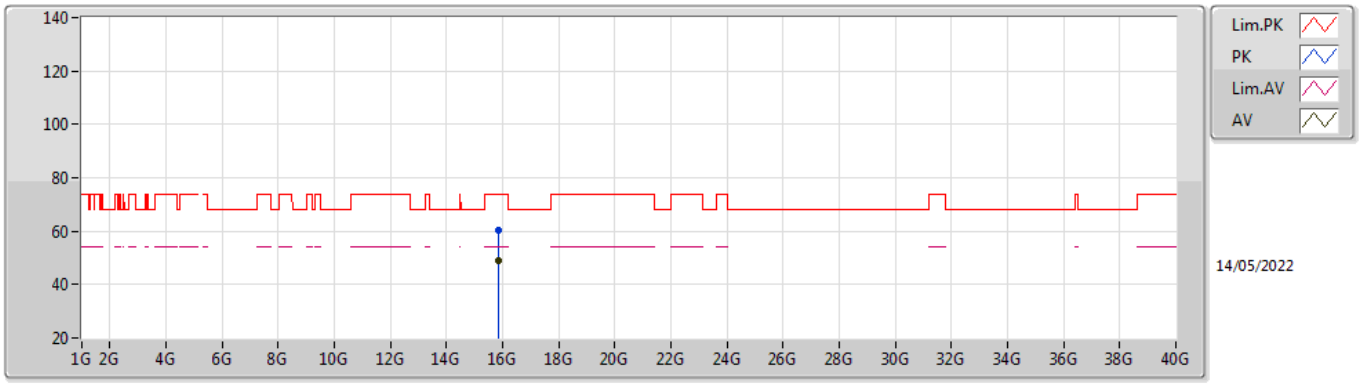


EUT X_1TX
Setting 14.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.85704G	60.38	74.00	-13.62	44.99	3	Horizontal	18	2.16	-	37.73	13.33	35.67
AV	15.85512G	49.15	54.00	-4.85	33.76	3	Horizontal	18	2.16	-	37.73	13.33	35.67

802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TnomVnom

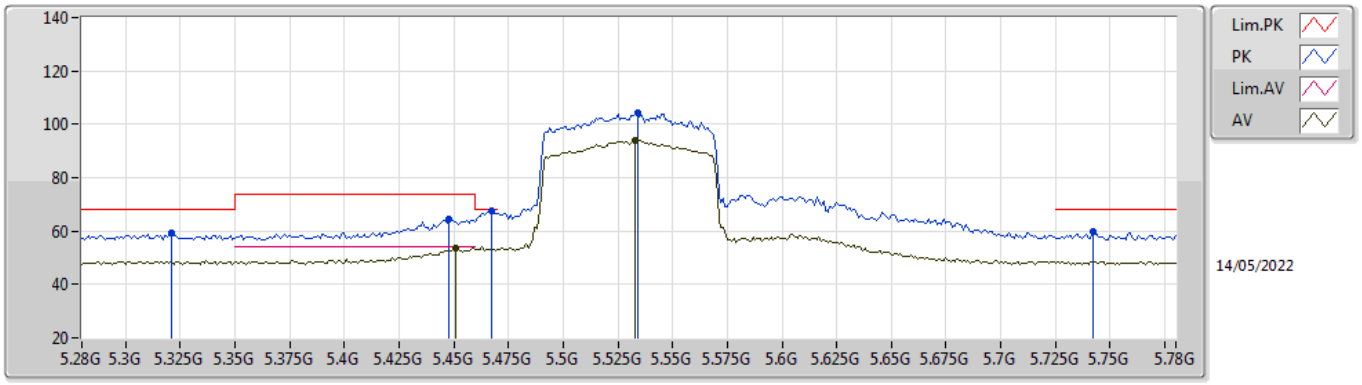


EUT X_1TX
Setting 15.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.321G	59.38	68.20	-8.82	53.02	3	Vertical	326	2.04	-	34.50	7.20	35.34
PK	5.448G	64.64	74.00	-9.36	58.24	3	Vertical	326	2.04	-	34.50	7.25	35.35
AV	5.451G	53.78	54.00	-0.22	47.38	3	Vertical	326	2.04	-	34.50	7.25	35.35
PK	5.467G	67.42	68.20	-0.78	60.97	3	Vertical	326	2.04	-	34.53	7.27	35.35
PK	5.534G	104.44	Inf	-Inf	97.88	3	Vertical	326	2.04	-	34.60	7.33	35.37
AV	5.533G	94.19	Inf	-Inf	87.63	3	Vertical	326	2.04	-	34.60	7.33	35.37
PK	5.742G	59.68	68.20	-8.52	53.53	3	Vertical	326	2.04	-	34.22	7.40	35.47

802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TnomVnom

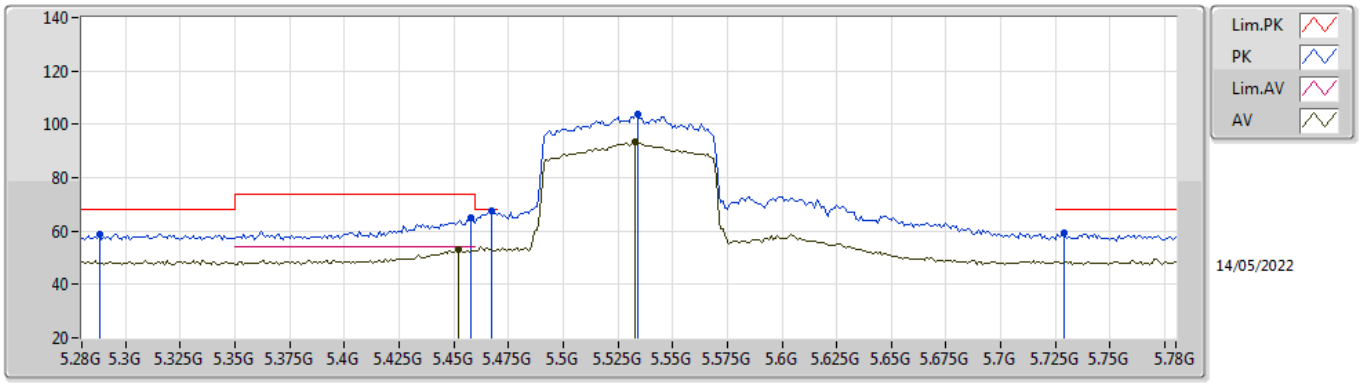


EUT X_1TX
Setting 15.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.288G	58.89	68.20	-9.31	52.55	3	Horizontal	198	2.11	-	34.48	7.20	35.34
PK	5.458G	64.90	74.00	-9.10	58.47	3	Horizontal	198	2.11	-	34.52	7.26	35.35
AV	5.452G	53.16	54.00	-0.84	46.76	3	Horizontal	198	2.11	-	34.50	7.25	35.35
PK	5.467G	67.79	68.20	-0.41	61.34	3	Horizontal	198	2.11	-	34.53	7.27	35.35
PK	5.534G	103.62	Inf	-Inf	97.06	3	Horizontal	198	2.11	-	34.60	7.33	35.37
AV	5.533G	93.28	Inf	-Inf	86.72	3	Horizontal	198	2.11	-	34.60	7.33	35.37
PK	5.729G	59.17	68.20	-9.03	52.99	3	Horizontal	198	2.11	-	34.24	7.40	35.46

802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TnomVnom

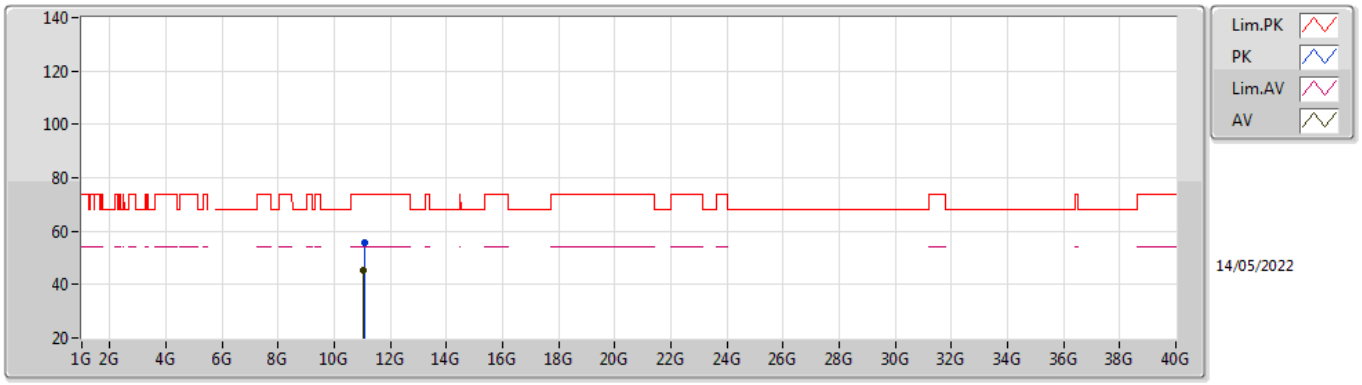


EUT X_1TX
Setting 15.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.06846G	55.70	74.00	-18.30	41.69	3	Vertical	285	2.03	-	38.47	10.66	35.12
AV	11.05406G	45.10	54.00	-8.90	31.09	3	Vertical	285	2.03	-	38.45	10.66	35.10

802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TnomVnom

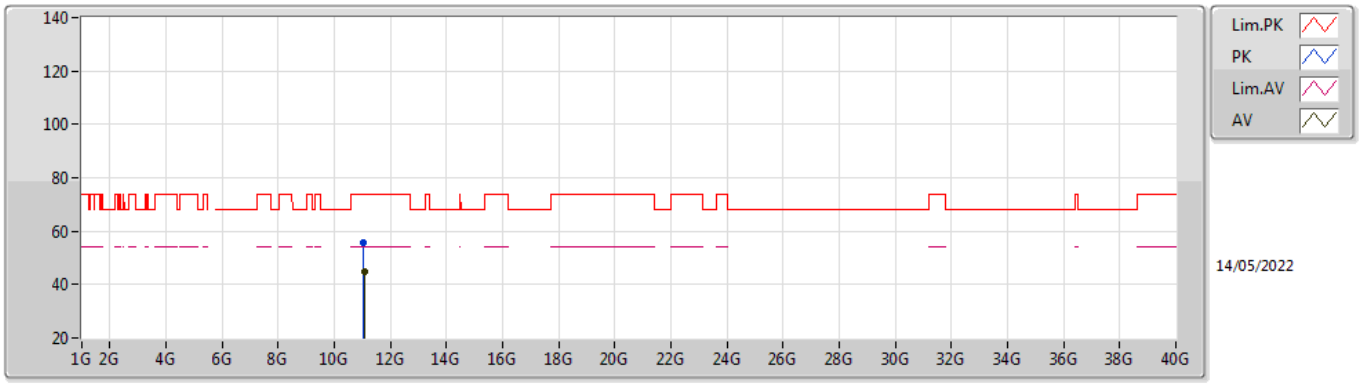


EUT X_1TX
Setting 15.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0462G	55.59	74.00	-18.41	41.57	3	Horizontal	180	2.42	-	38.45	10.66	35.09
AV	11.06366G	44.85	54.00	-9.15	30.84	3	Horizontal	180	2.42	-	38.46	10.66	35.11

802.11ax HEW80_Nss1,(MCS0)_1TX

5610MHz_TnomVnom

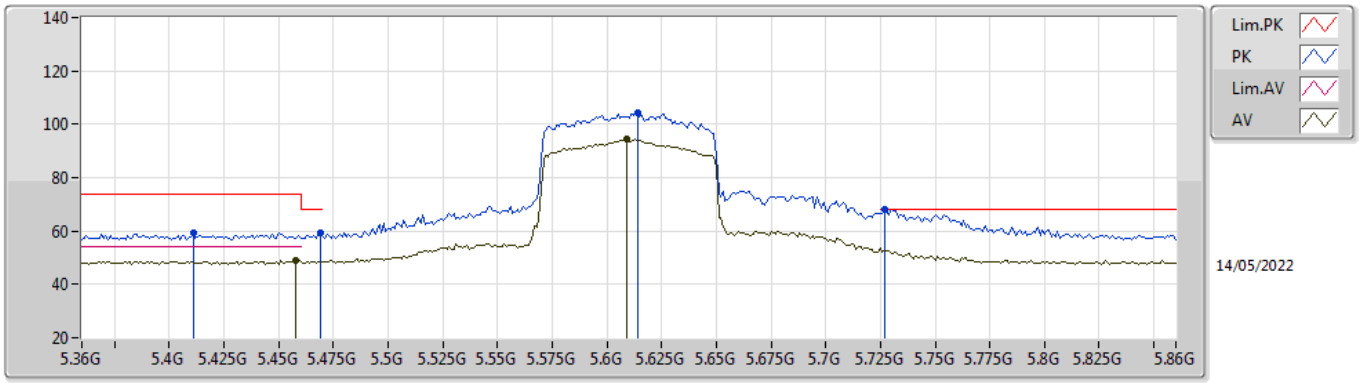


EUT X_1TX
Setting 15.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.411G	59.34	74.00	-14.66	52.90	3	Vertical	329	2.04	-	34.58	7.21	35.35
PK	5.469G	59.33	68.20	-8.87	52.87	3	Vertical	329	2.04	-	34.54	7.27	35.35
AV	5.458G	48.77	54.00	-5.23	42.34	3	Vertical	329	2.04	-	34.52	7.26	35.35
PK	5.614G	104.46	Inf	-Inf	97.90	3	Vertical	329	2.04	-	34.57	7.40	35.41
AV	5.609G	94.30	Inf	-Inf	87.72	3	Vertical	329	2.04	-	34.58	7.40	35.40
PK	5.727G	68.14	68.20	-0.06	61.95	3	Vertical	329	2.04	-	34.25	7.40	35.46

802.11ax HEW80_Nss1,(MCS0)_1TX

5610MHz_TnomVnom

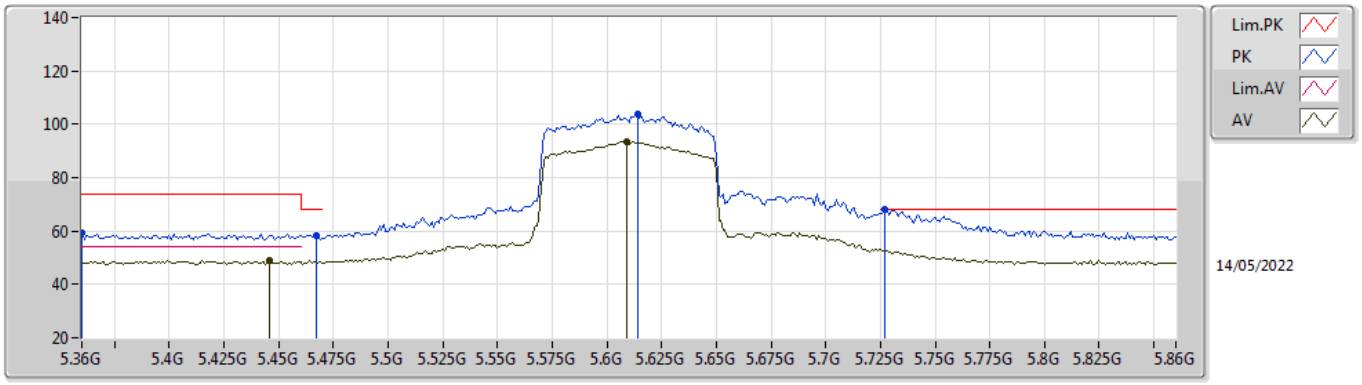


EUT X_1TX
Setting 15.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.36G	59.25	74.00	-14.75	52.87	3	Horizontal	195	2.03	-	34.52	7.20	35.34
PK	5.467G	58.51	68.20	-9.69	52.06	3	Horizontal	195	2.03	-	34.53	7.27	35.35
AV	5.446G	48.92	54.00	-5.08	42.51	3	Horizontal	195	2.03	-	34.51	7.25	35.35
PK	5.614G	103.84	Inf	-Inf	97.28	3	Horizontal	195	2.03	-	34.57	7.40	35.41
AV	5.609G	93.59	Inf	-Inf	87.01	3	Horizontal	195	2.03	-	34.58	7.40	35.40
PK	5.727G	67.91	68.20	-0.29	61.72	3	Horizontal	195	2.03	-	34.25	7.40	35.46

802.11ax HEW80_Nss1,(MCS0)_1TX

5610MHz_TnomVnom

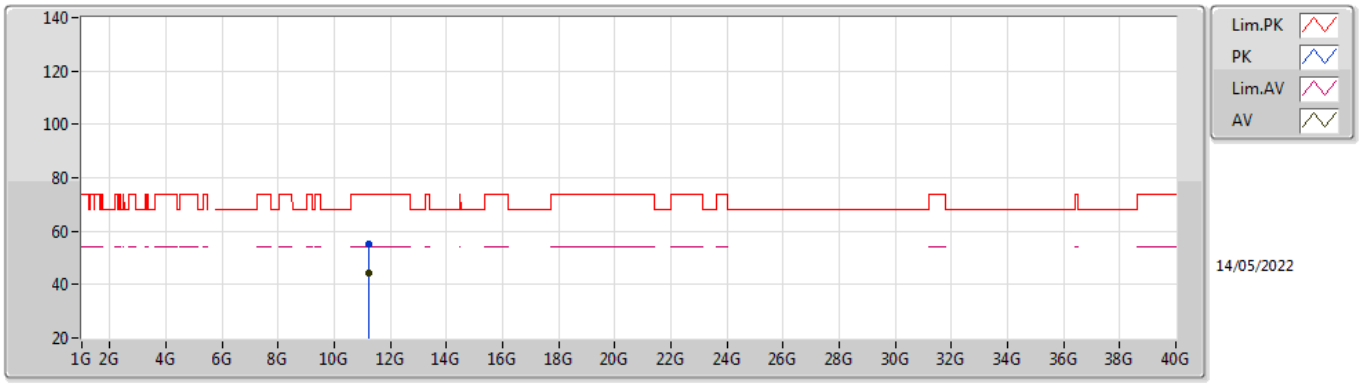


EUT X_1TX
Setting 15.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.21808G	55.30	74.00	-18.70	41.28	3	Vertical	267	1.54	-	38.62	10.68	35.28
AV	11.2323G	44.43	54.00	-9.57	30.42	3	Vertical	267	1.54	-	38.63	10.68	35.30

802.11ax HEW80_Nss1,(MCS0)_1TX

5610MHz_TnomVnom

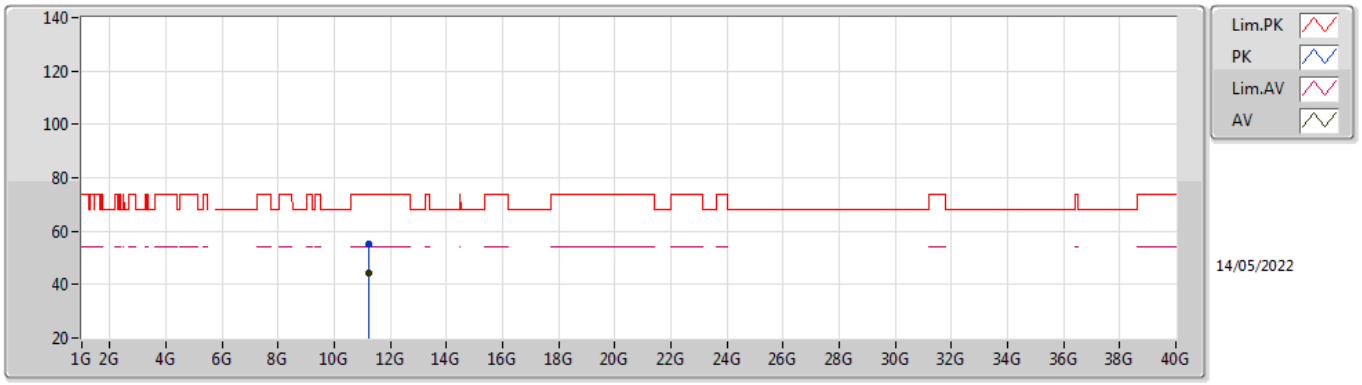


EUT X_1TX
Setting 15.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.22258G	54.96	74.00	-19.04	40.95	3	Horizontal	339	1.30	-	38.62	10.68	35.29
AV	11.22714G	44.42	54.00	-9.58	30.40	3	Horizontal	339	1.30	-	38.63	10.68	35.29

802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

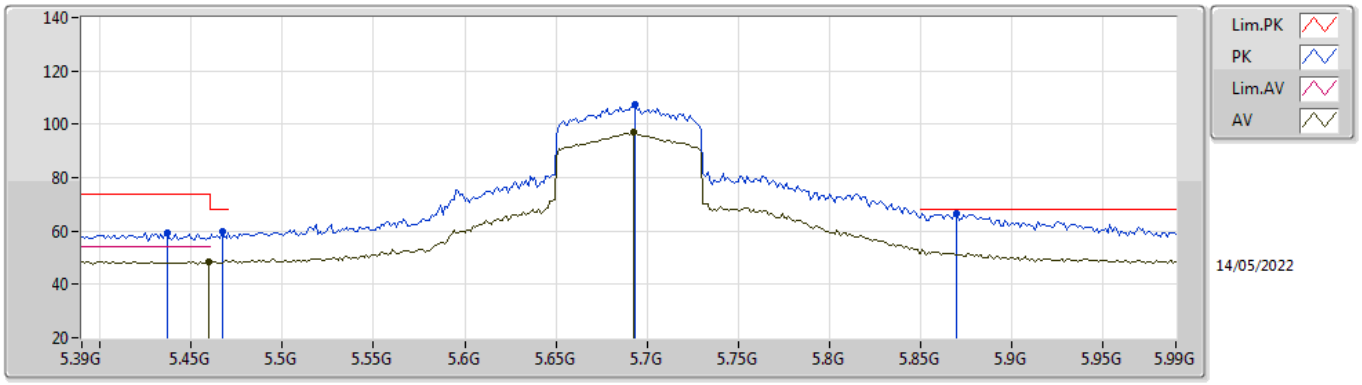


EUT X_1TX
Setting 18.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4368G	59.16	74.00	-14.84	52.74	3	Vertical	332	1.98	-	34.53	7.24	35.35
PK	5.4668G	59.62	68.20	-8.58	53.17	3	Vertical	332	1.98	-	34.53	7.27	35.35
AV	5.4596G	48.68	54.00	-5.32	42.25	3	Vertical	332	1.98	-	34.52	7.26	35.35
PK	5.6936G	107.20	Inf	-Inf	100.92	3	Vertical	332	1.98	-	34.33	7.40	35.45
AV	5.6924G	96.92	Inf	-Inf	90.64	3	Vertical	332	1.98	-	34.33	7.40	35.45
PK	5.87G	66.69	68.20	-1.51	60.34	3	Vertical	332	1.98	-	34.42	7.47	35.54

802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

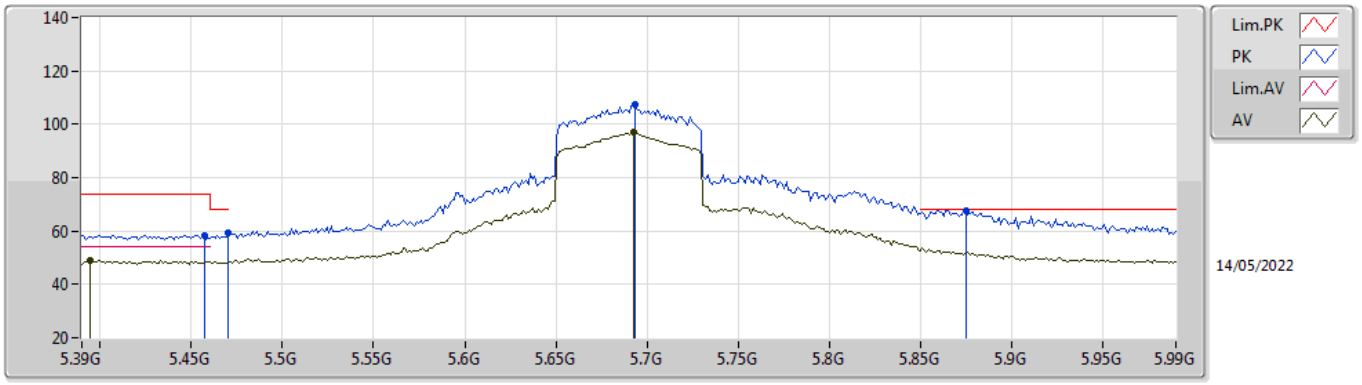


EUT X_1TX
Setting 18.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4572G	58.51	74.00	-15.49	52.09	3	Horizontal	194	1.96	-	34.51	7.26	35.35
AV	5.3948G	48.91	54.00	-5.09	42.47	3	Horizontal	194	1.96	-	34.59	7.20	35.35
PK	5.47G	59.47	68.20	-8.73	53.01	3	Horizontal	194	1.96	-	34.54	7.27	35.35
PK	5.6936G	107.31	Inf	-Inf	101.03	3	Horizontal	194	1.96	-	34.33	7.40	35.45
AV	5.6924G	97.21	Inf	-Inf	90.93	3	Horizontal	194	1.96	-	34.33	7.40	35.45
PK	5.8748G	67.84	68.20	-0.36	61.46	3	Horizontal	194	1.96	-	34.45	7.47	35.54

802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

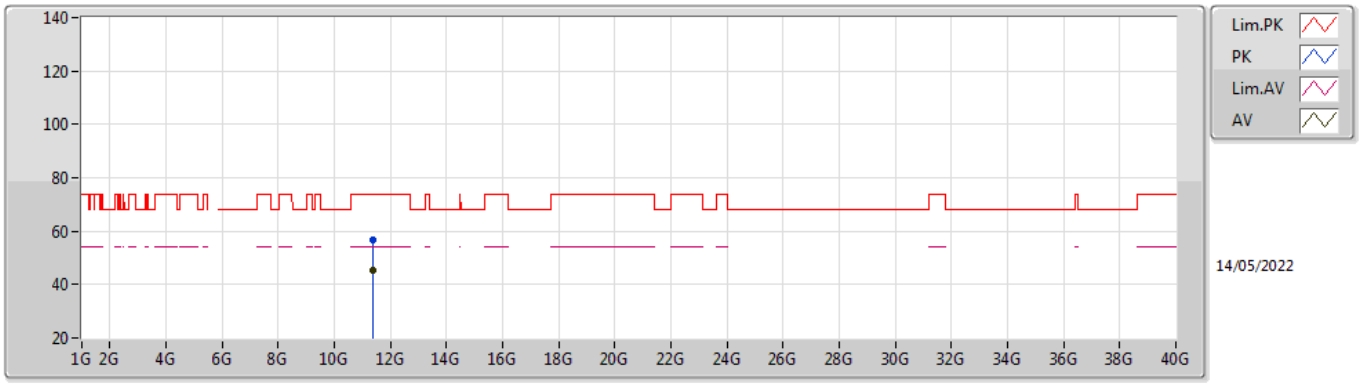


EUT X_1TX
Setting 18.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.37844G	56.69	74.00	-17.31	42.66	3	Vertical	73	2.90	-	38.78	10.71	35.46
AV	11.3797G	45.40	54.00	-8.60	31.38	3	Vertical	73	2.90	-	38.78	10.71	35.47

802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

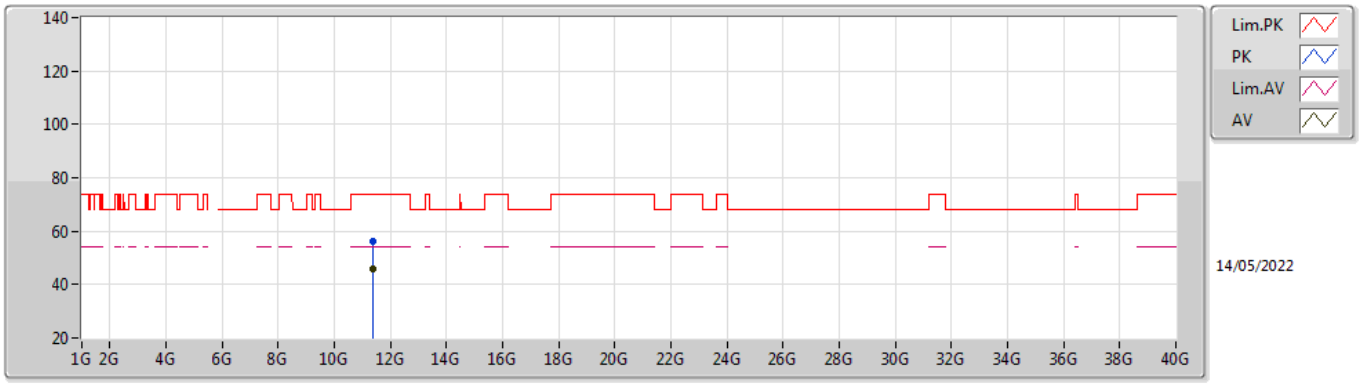


EUT X_1TX
Setting 18.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.3917G	56.32	74.00	-17.68	42.30	3	Horizontal	18	1.57	-	38.79	10.71	35.48
AV	11.37862G	45.83	54.00	-8.17	31.80	3	Horizontal	18	1.57	-	38.78	10.71	35.46

802.11ax HEW80_Nss1,(MCS0)_1TX

5775MHz_TnomVnom

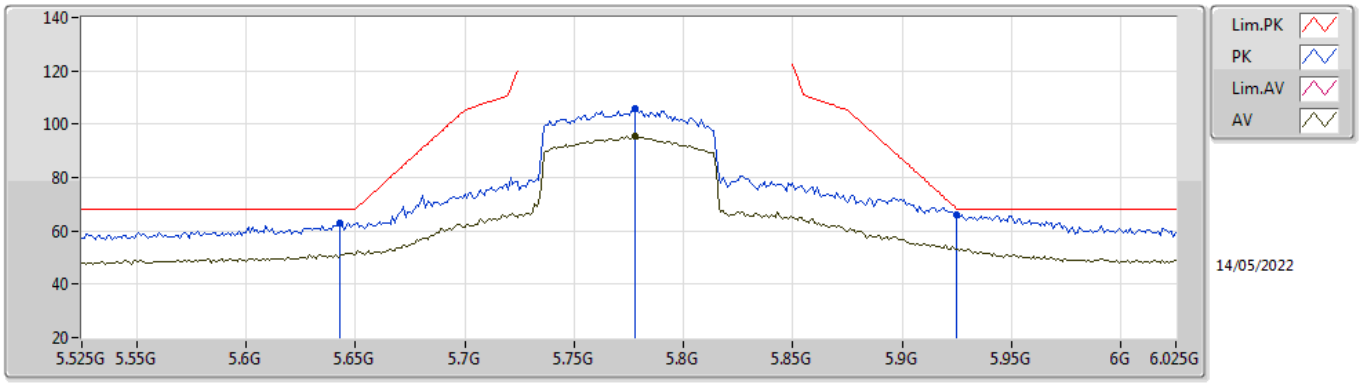


EUT X_1TX
Setting 17.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.643G	62.97	68.20	-5.23	56.48	3	Vertical	333	1.98	-	34.51	7.40	35.42
PK	5.778G	105.94	Inf	-Inf	99.83	3	Vertical	333	1.98	-	34.20	7.40	35.49
AV	5.778G	95.66	Inf	-Inf	89.55	3	Vertical	333	1.98	-	34.20	7.40	35.49
PK	5.925G	66.28	68.20	-1.92	59.61	3	Vertical	333	1.98	-	34.70	7.53	35.56

802.11ax HEW80_Nss1,(MCS0)_1TX

5775MHz_TnomVnom

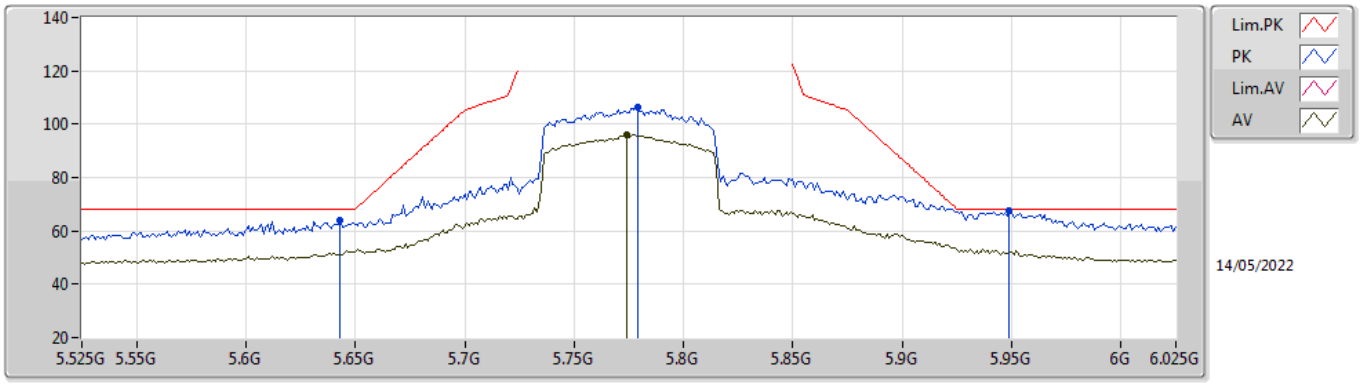


EUT X_1TX
Setting 17.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.643G	63.72	68.20	-4.48	57.23	3	Horizontal	194	2.09	-	34.51	7.40	35.42
PK	5.779G	106.35	Inf	-Inf	100.24	3	Horizontal	194	2.09	-	34.20	7.40	35.49
AV	5.774G	96.14	Inf	-Inf	90.03	3	Horizontal	194	2.09	-	34.20	7.40	35.49
PK	5.949G	67.80	68.20	-0.40	61.02	3	Horizontal	194	2.09	-	34.80	7.55	35.57

802.11ax HEW80_Nss1,(MCS0)_1TX

5775MHz_TnomVnom

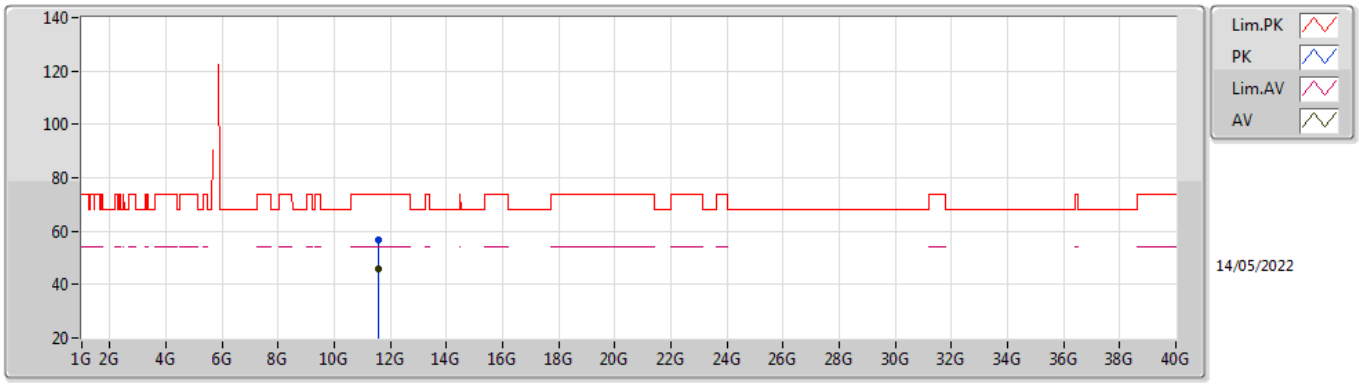


EUT X_1TX
Setting 17.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.54976G	56.53	74.00	-17.47	42.19	3	Vertical	33	2.32	-	39.20	10.73	35.59
AV	11.55474G	46.09	54.00	-7.91	31.73	3	Vertical	33	2.32	-	39.22	10.73	35.59

802.11ax HEW80_Nss1,(MCS0)_1TX

5775MHz_TnomVnom

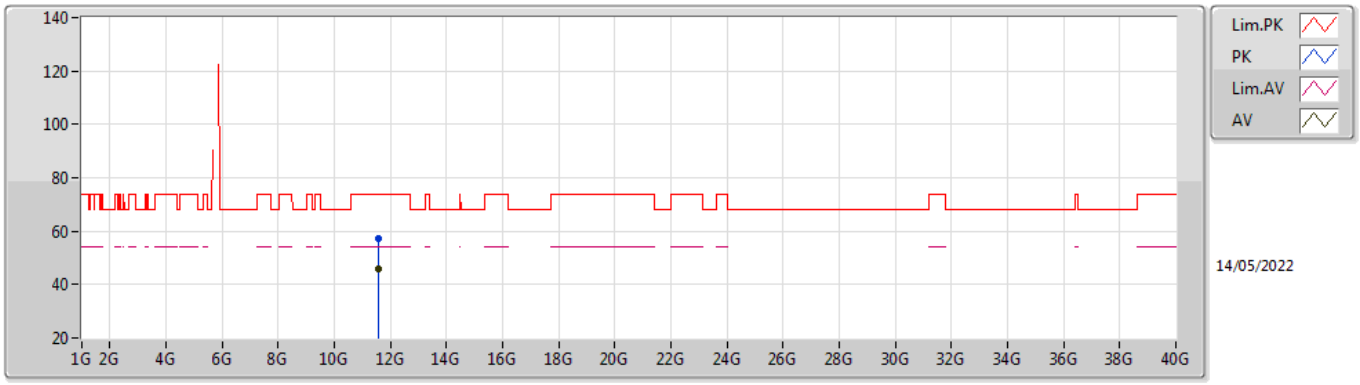


EUT X_1TX
Setting 17.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5575G	57.27	74.00	-16.73	42.90	3	Horizontal	221	1.34	-	39.23	10.73	35.59
AV	11.55732G	46.12	54.00	-7.88	31.75	3	Horizontal	221	1.34	-	39.23	10.73	35.59

802.11ax HEW160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

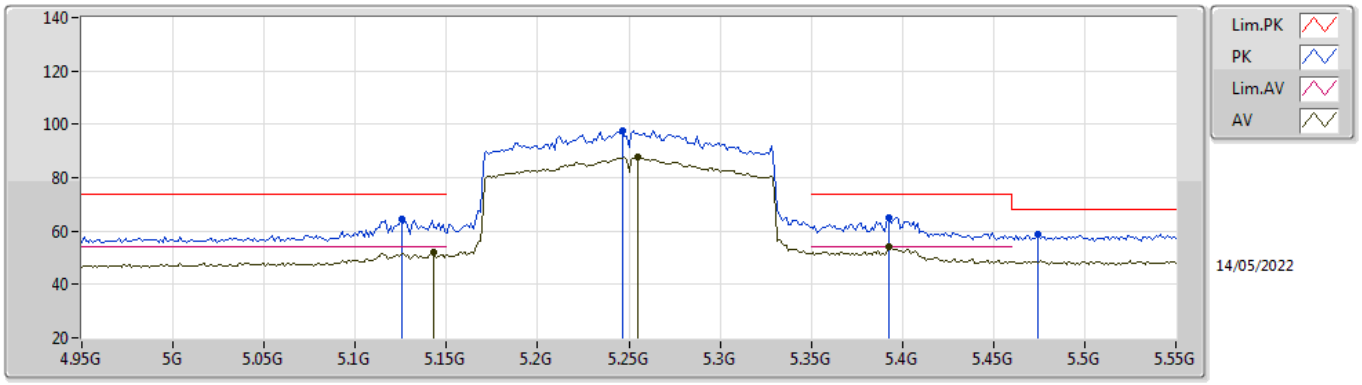


EUT X_1TX
Setting 11
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1252G	64.56	74.00	-9.44	58.79	3	Vertical	74	1.29	-	33.95	7.16	35.34
AV	5.1432G	52.08	54.00	-1.92	46.26	3	Vertical	74	1.29	-	33.99	7.17	35.34
PK	5.2464G	97.83	Inf	-Inf	91.58	3	Vertical	74	1.29	-	34.39	7.20	35.34
AV	5.2548G	87.95	Inf	-Inf	81.68	3	Vertical	74	1.29	-	34.41	7.20	35.34
PK	5.3928G	65.19	74.00	-8.81	58.75	3	Vertical	74	1.29	-	34.59	7.20	35.35
AV	5.3928G	53.99	54.00	-0.01	47.55	3	Vertical	74	1.29	-	34.59	7.20	35.35
PK	5.4744G	58.94	68.20	-9.26	52.47	3	Vertical	74	1.29	-	34.55	7.27	35.35

802.11ax HEW160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

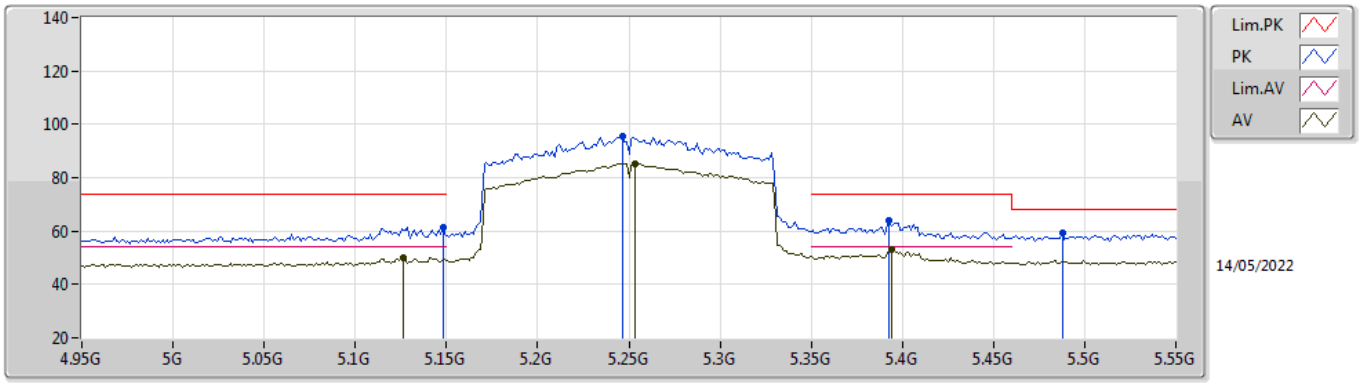


EUT X_1TX
Setting 11
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.148G	61.42	74.00	-12.58	55.59	3	Horizontal	201	2.22	-	34.00	7.17	35.34
AV	5.1264G	50.10	54.00	-3.90	44.33	3	Horizontal	201	2.22	-	33.95	7.16	35.34
PK	5.2464G	95.60	Inf	-Inf	89.35	3	Horizontal	201	2.22	-	34.39	7.20	35.34
AV	5.2536G	85.30	Inf	-Inf	79.03	3	Horizontal	201	2.22	-	34.41	7.20	35.34
PK	5.3928G	64.18	74.00	-9.82	57.74	3	Horizontal	201	2.22	-	34.59	7.20	35.35
AV	5.394G	52.96	54.00	-1.04	46.52	3	Horizontal	201	2.22	-	34.59	7.20	35.35
PK	5.4876G	59.20	68.20	-9.00	52.68	3	Horizontal	201	2.22	-	34.58	7.29	35.35

802.11ax HEW160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

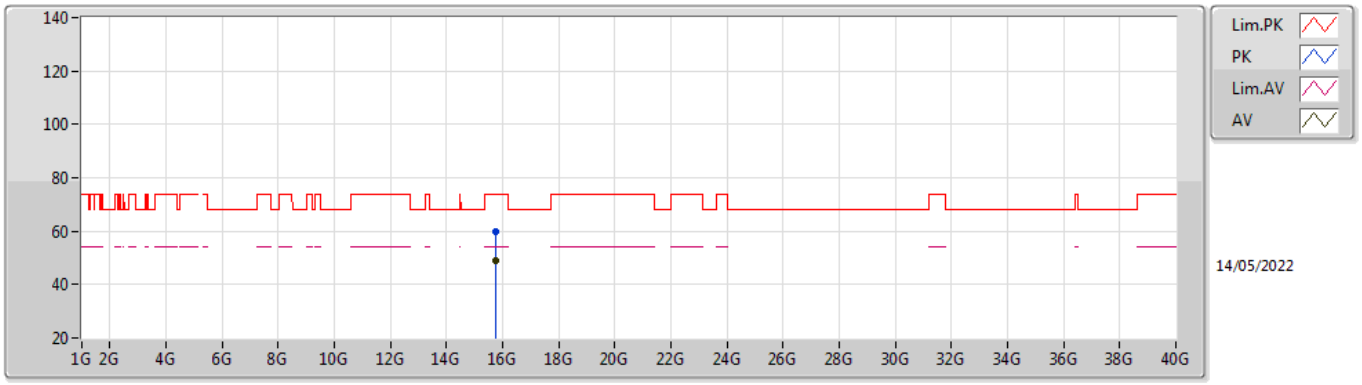


EUT X_1TX
Setting 11
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.76104G	59.78	74.00	-14.22	44.35	3	Vertical	168	2.76	-	37.74	13.28	35.59
AV	15.7506G	48.87	54.00	-5.13	33.47	3	Vertical	168	2.76	-	37.70	13.28	35.58

802.11ax HEW160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

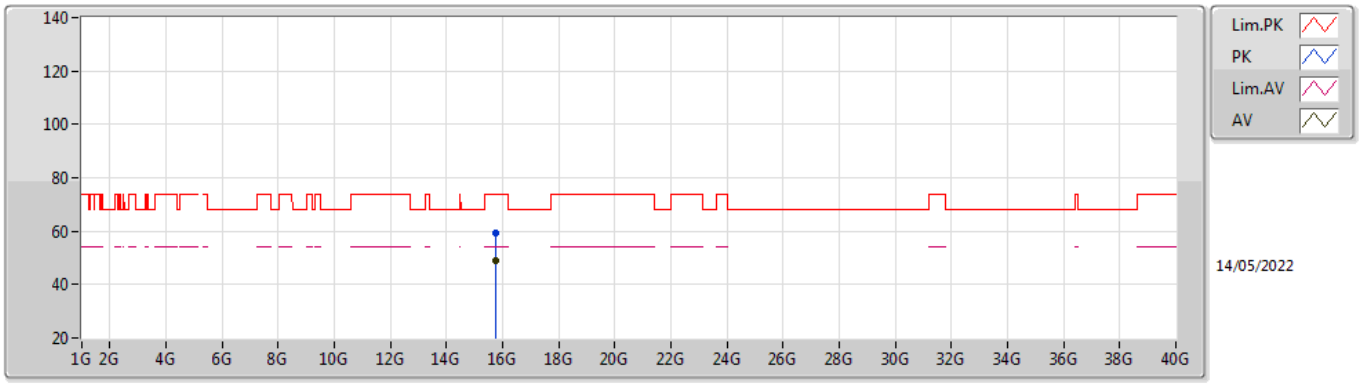


EUT X_1TX
Setting 11
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.75726G	59.43	74.00	-14.57	44.01	3	Horizontal	243	1.71	-	37.73	13.28	35.59
AV	15.76092G	48.74	54.00	-5.26	33.31	3	Horizontal	243	1.71	-	37.74	13.28	35.59

802.11ax HEW160_Nss1,(MCS0)_1TX

5570MHz_TnomVnom

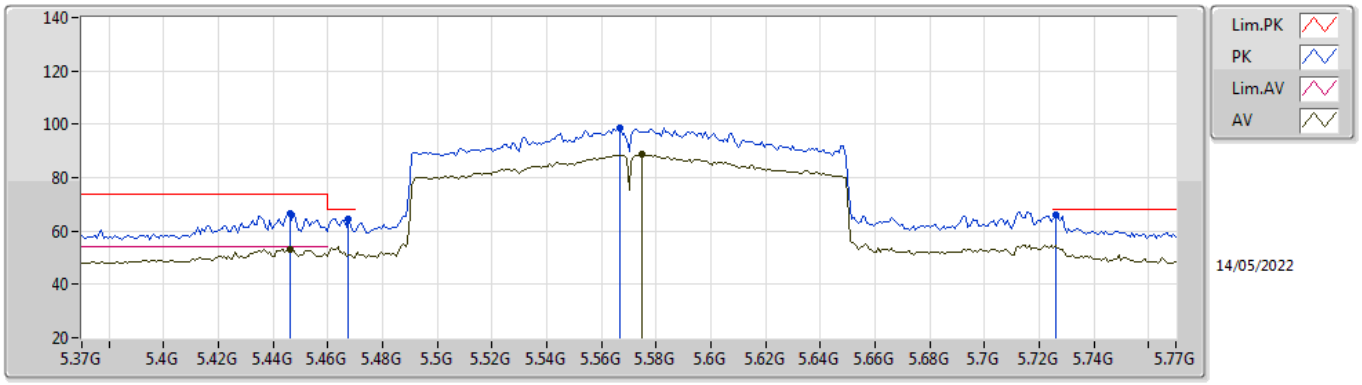


EUT X_1TX
Setting 12.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.446G	66.81	74.00	-7.19	60.40	3	Vertical	321	2.03	-	34.51	7.25	35.35
AV	5.446G	53.27	54.00	-0.73	46.86	3	Vertical	321	2.03	-	34.51	7.25	35.35
PK	5.4676G	64.61	68.20	-3.59	58.15	3	Vertical	321	2.03	-	34.54	7.27	35.35
PK	5.5668G	98.67	Inf	-Inf	92.08	3	Vertical	321	2.03	-	34.60	7.37	35.38
AV	5.5748G	88.98	Inf	-Inf	82.40	3	Vertical	321	2.03	-	34.60	7.37	35.39
PK	5.726G	65.79	68.20	-2.41	59.60	3	Vertical	321	2.03	-	34.25	7.40	35.46

802.11ax HEW160_Nss1,(MCS0)_1TX

5570MHz_TnomVnom

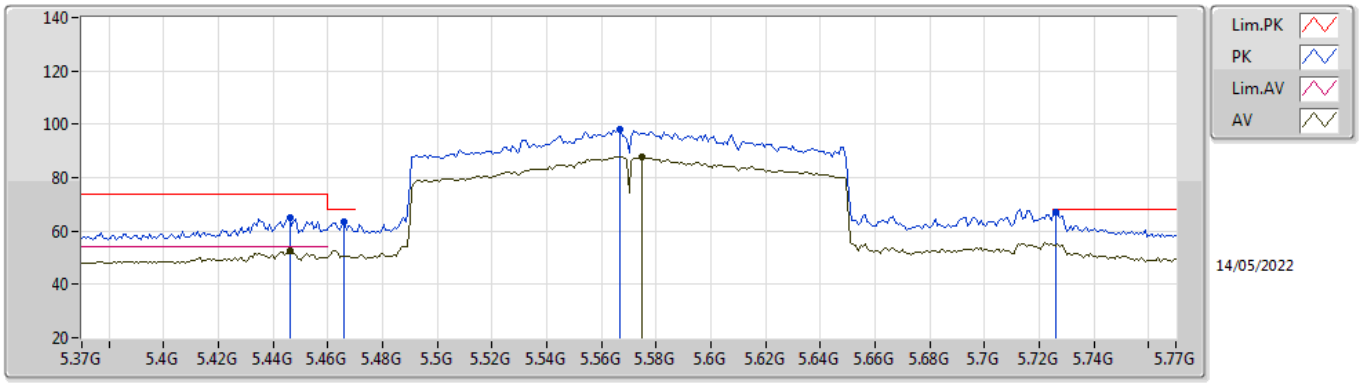


EUT X_1TX
Setting 12.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.446G	65.04	74.00	-8.96	58.63	3	Horizontal	193	2.02	-	34.51	7.25	35.35
AV	5.446G	52.44	54.00	-1.56	46.03	3	Horizontal	193	2.02	-	34.51	7.25	35.35
PK	5.466G	63.31	68.20	-4.89	56.86	3	Horizontal	193	2.02	-	34.53	7.27	35.35
PK	5.5668G	98.06	Inf	-Inf	91.47	3	Horizontal	193	2.02	-	34.60	7.37	35.38
AV	5.5748G	87.95	Inf	-Inf	81.37	3	Horizontal	193	2.02	-	34.60	7.37	35.39
PK	5.726G	67.28	68.20	-0.92	61.09	3	Horizontal	193	2.02	-	34.25	7.40	35.46

802.11ax HEW160_Nss1,(MCS0)_1TX

5570MHz_TnomVnom

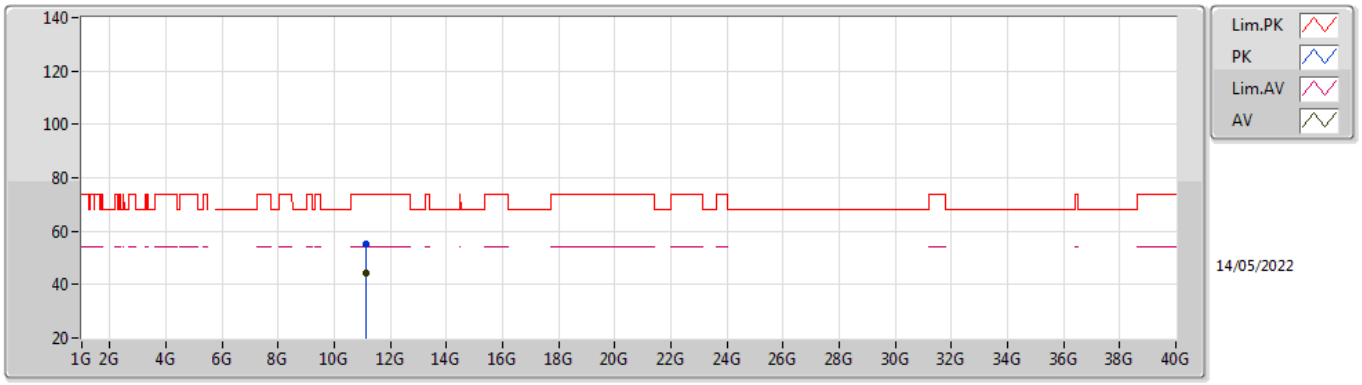


EUT X_1TX
Setting 12.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1343G	55.38	74.00	-18.62	41.37	3	Vertical	216	2.49	-	38.53	10.67	35.19
AV	11.1397G	44.45	54.00	-9.55	30.44	3	Vertical	216	2.49	-	38.54	10.67	35.20

802.11ax HEW160_Nss1,(MCS0)_1TX

5570MHz_TnomVnom

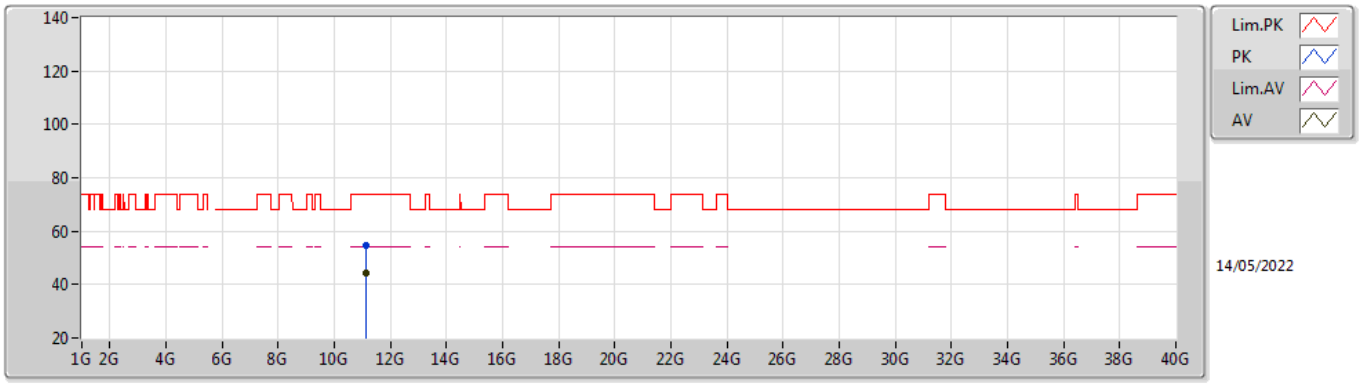

EUT X_1TX
Setting 12.25
03-D-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.15404G	54.81	74.00	-19.19	40.80	3	Horizontal	295	1.42	-	38.55	10.67	35.21
AV	11.15248G	44.25	54.00	-9.75	30.24	3	Horizontal	295	1.42	-	38.55	10.67	35.21

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW160_Nss1,(MCS0)_1TX	Pass	AV	5.402G	53.90	54.00	-0.10	3	Horizontal	111	1.98	-

802.11a_Nss1,(6Mbps)_1TX

5180MHz_TnomVnom

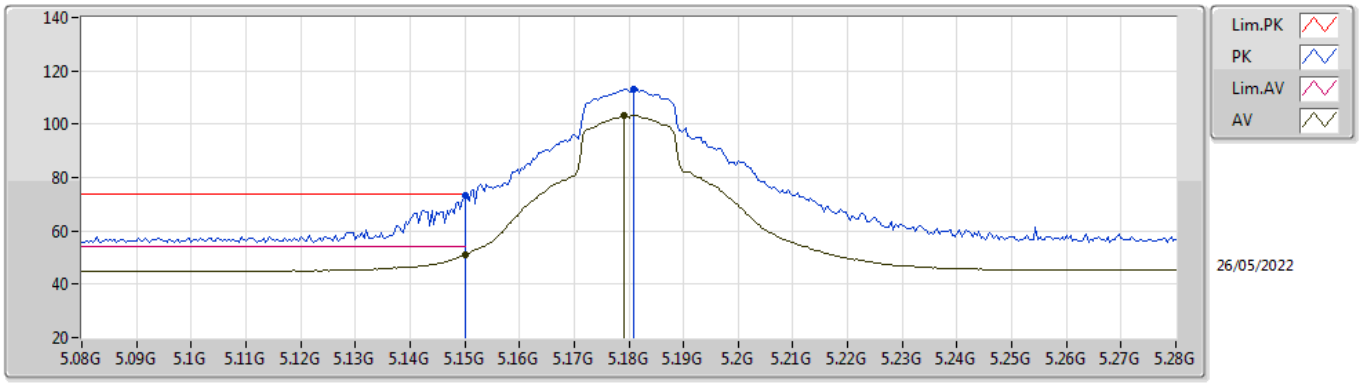


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	73.16	74.00	-0.84	67.33	3	Vertical	34	2.02	-	34.00	7.17	35.34
AV	5.15G	51.08	54.00	-2.92	45.25	3	Vertical	34	2.02	-	34.00	7.17	35.34
PK	5.1808G	113.05	Inf	-Inf	107.08	3	Vertical	34	2.02	-	34.12	7.19	35.34
AV	5.1792G	103.19	Inf	-Inf	97.22	3	Vertical	34	2.02	-	34.12	7.19	35.34

802.11a_Nss1,(6Mbps)_1TX

5180MHz_TnomVnom

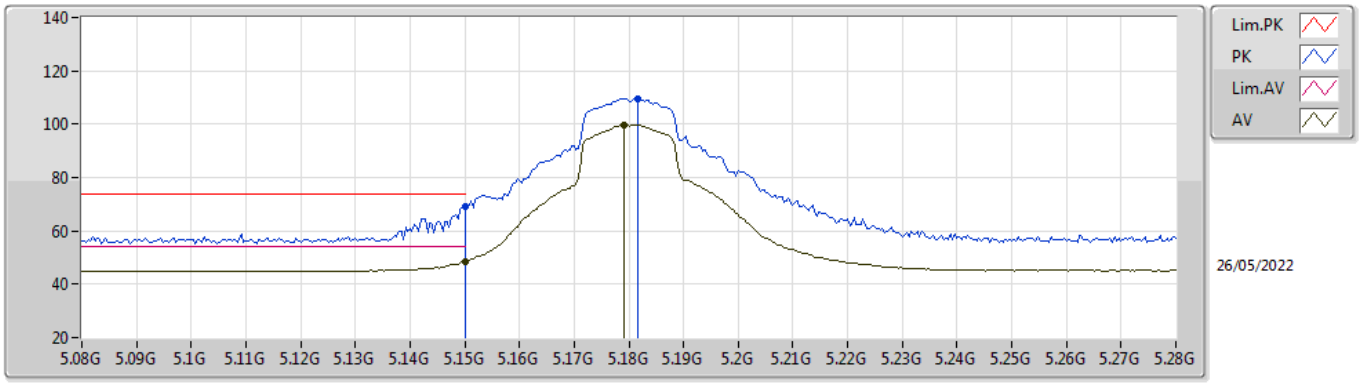


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	69.39	74.00	-4.61	63.56	3	Horizontal	54	1.78	-	34.00	7.17	35.34
AV	5.15G	48.51	54.00	-5.49	42.68	3	Horizontal	54	1.78	-	34.00	7.17	35.34
PK	5.1816G	109.73	Inf	-Inf	103.75	3	Horizontal	54	1.78	-	34.13	7.19	35.34
AV	5.1792G	99.89	Inf	-Inf	93.92	3	Horizontal	54	1.78	-	34.12	7.19	35.34

802.11a_Nss1,(6Mbps)_1TX

5180MHz_TnomVnom

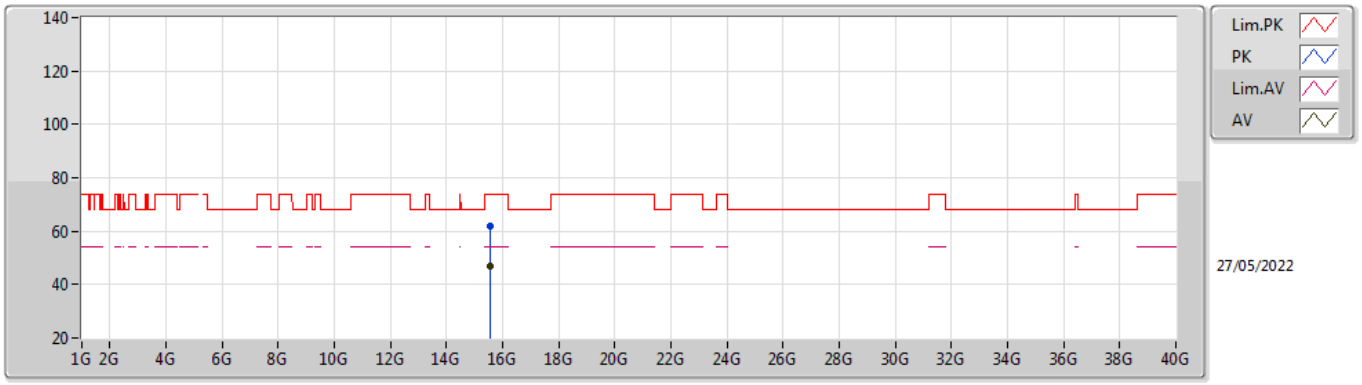


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5412G	61.92	74.00	-12.08	45.74	3	Vertical	154	2.09	-	38.41	13.17	35.40
AV	15.53736G	46.91	54.00	-7.09	30.70	3	Vertical	154	2.09	-	38.44	13.17	35.40

802.11a_Nss1,(6Mbps)_1TX

5180MHz_TnomVnom

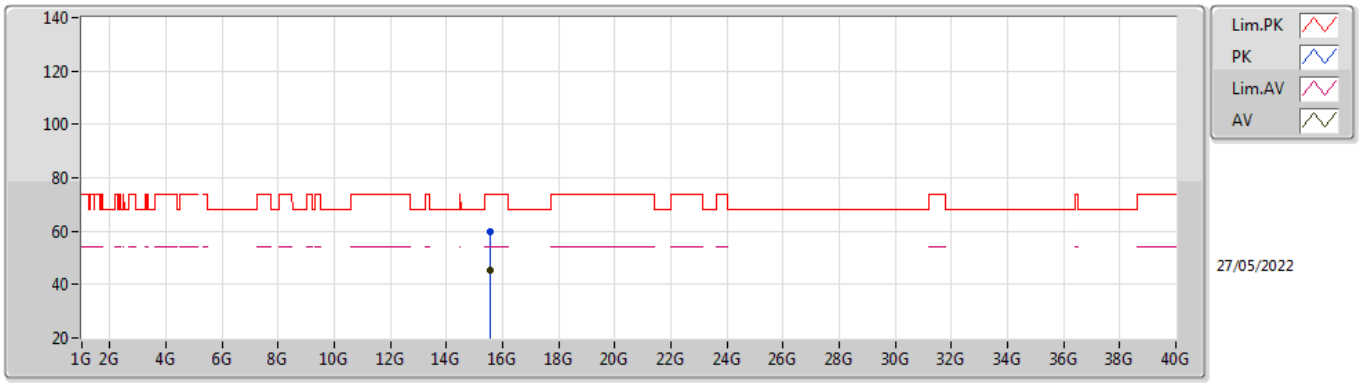


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.53874G	59.57	74.00	-14.43	43.37	3	Horizontal	282	1.80	-	38.43	13.17	35.40
AV	15.5388G	45.59	54.00	-8.41	29.39	3	Horizontal	282	1.80	-	38.43	13.17	35.40

802.11a_Nss1,(6Mbps)_1TX

5200MHz_TnomVnom

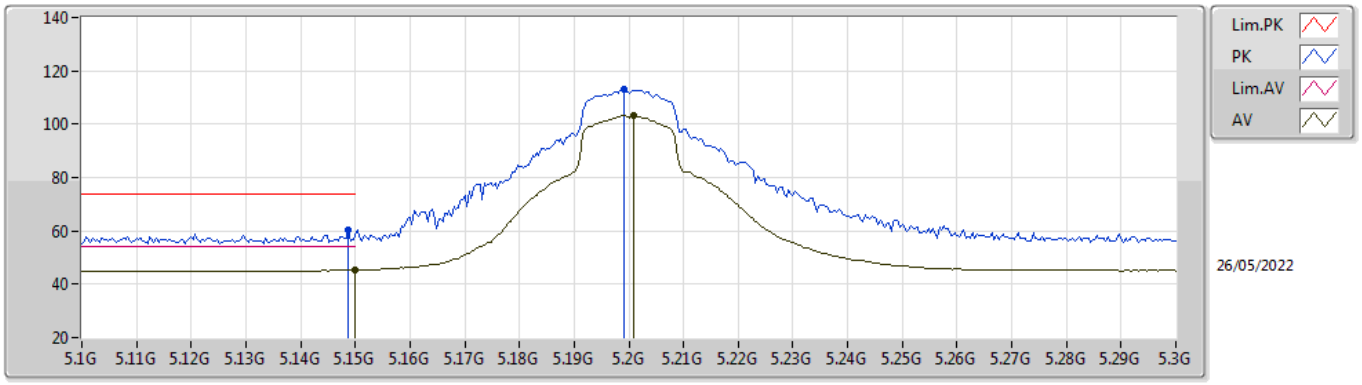


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1488G	60.55	74.00	-13.45	54.72	3	Vertical	34	1.99	-	34.00	7.17	35.34
AV	5.15G	45.38	54.00	-8.62	39.55	3	Vertical	34	1.99	-	34.00	7.17	35.34
PK	5.1992G	112.96	Inf	-Inf	106.90	3	Vertical	34	1.99	-	34.20	7.20	35.34
AV	5.2008G	103.09	Inf	-Inf	97.03	3	Vertical	34	1.99	-	34.20	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5200MHz_TnomVnom

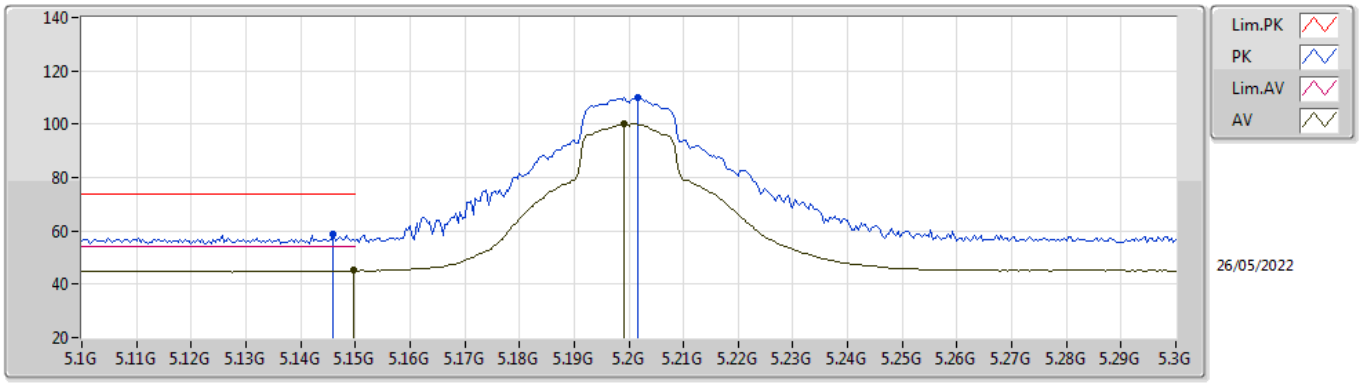


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.146G	58.95	74.00	-15.05	53.13	3	Horizontal	54	1.80	-	33.99	7.17	35.34
AV	5.1496G	45.09	54.00	-8.91	39.26	3	Horizontal	54	1.80	-	34.00	7.17	35.34
PK	5.2016G	109.88	Inf	-Inf	103.81	3	Horizontal	54	1.80	-	34.21	7.20	35.34
AV	5.1992G	100.05	Inf	-Inf	93.99	3	Horizontal	54	1.80	-	34.20	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5200MHz_TnomVnom

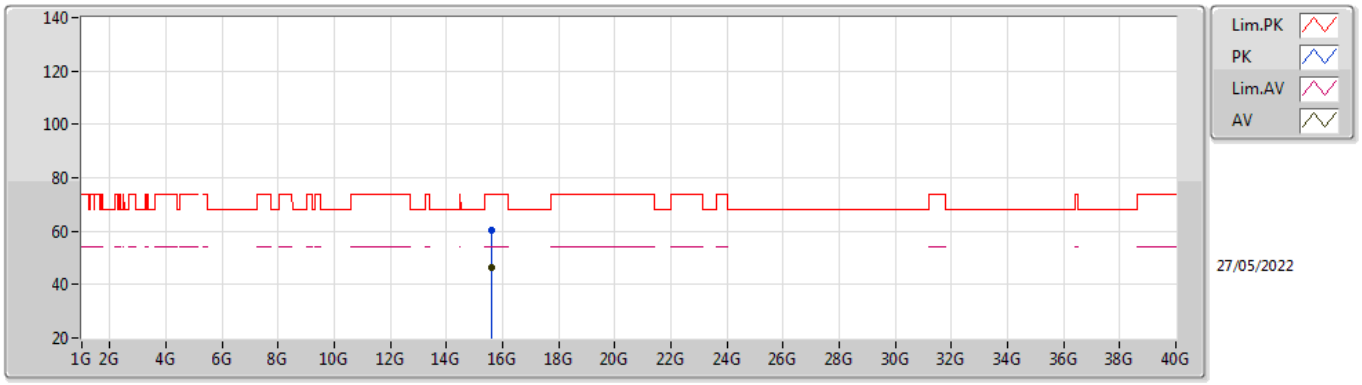


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6009G	60.30	74.00	-13.70	44.55	3	Vertical	155	2.10	-	38.00	13.20	35.45
AV	15.60276G	46.57	54.00	-7.43	30.84	3	Vertical	155	2.10	-	37.99	13.20	35.46

802.11a_Nss1,(6Mbps)_1TX

5200MHz_TnomVnom

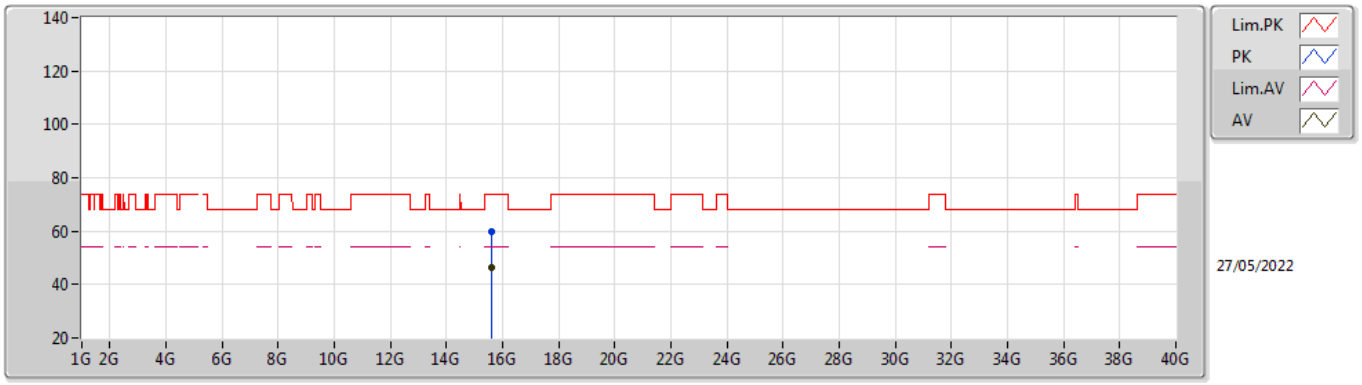


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.59916G	60.06	74.00	-13.94	44.30	3	Horizontal	291	1.89	-	38.01	13.20	35.45
AV	15.60276G	46.34	54.00	-7.66	30.61	3	Horizontal	291	1.89	-	37.99	13.20	35.46

802.11a_Nss1,(6Mbps)_1TX

5240MHz_TnomVnom

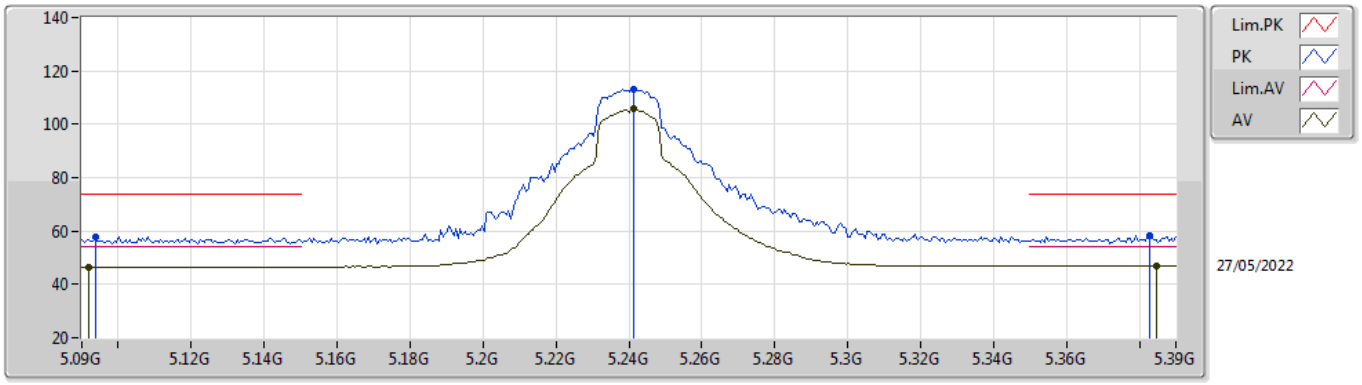


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.0936G	57.71	74.00	-16.29	52.00	3	Vertical	33	1.78	-	33.89	7.15	35.33
AV	5.0918G	46.61	54.00	-7.39	40.91	3	Vertical	33	1.78	-	33.88	7.15	35.33
PK	5.2412G	113.09	Inf	-Inf	106.87	3	Vertical	33	1.78	-	34.36	7.20	35.34
AV	5.2412G	105.78	Inf	-Inf	99.56	3	Vertical	33	1.78	-	34.36	7.20	35.34
PK	5.3828G	58.20	74.00	-15.80	51.78	3	Vertical	33	1.78	-	34.57	7.20	35.35
AV	5.3846G	46.97	54.00	-7.03	40.55	3	Vertical	33	1.78	-	34.57	7.20	35.35

802.11a_Nss1,(6Mbps)_1TX

5240MHz_TnomVnom

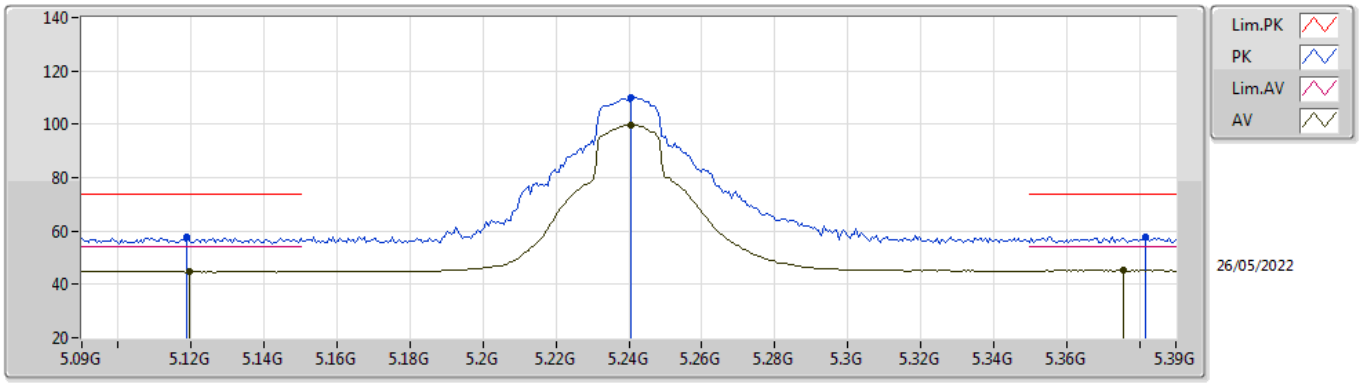


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1188G	58.01	74.00	-15.99	52.24	3	Horizontal	55	1.89	-	33.94	7.16	35.33
AV	5.1194G	44.86	54.00	-9.14	39.09	3	Horizontal	55	1.89	-	33.94	7.16	35.33
PK	5.2406G	109.78	Inf	-Inf	103.56	3	Horizontal	55	1.89	-	34.36	7.20	35.34
AV	5.2406G	99.90	Inf	-Inf	93.68	3	Horizontal	55	1.89	-	34.36	7.20	35.34
PK	5.3816G	57.79	74.00	-16.21	51.38	3	Horizontal	55	1.89	-	34.56	7.20	35.35
AV	5.3756G	45.26	54.00	-8.74	38.86	3	Horizontal	55	1.89	-	34.55	7.20	35.35

802.11a_Nss1,(6Mbps)_1TX

5240MHz_TnomVnom

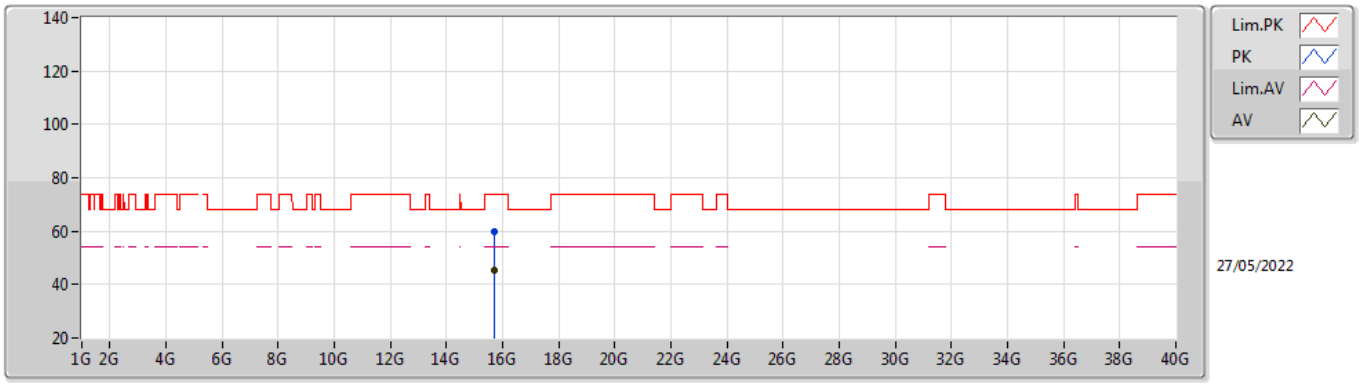


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.72198G	60.08	74.00	-13.92	44.79	3	Vertical	165	1.94	-	37.59	13.26	35.56
AV	15.71868G	45.43	54.00	-8.57	30.15	3	Vertical	165	1.94	-	37.57	13.26	35.55

802.11a_Nss1,(6Mbps)_1TX

5240MHz_TnomVnom

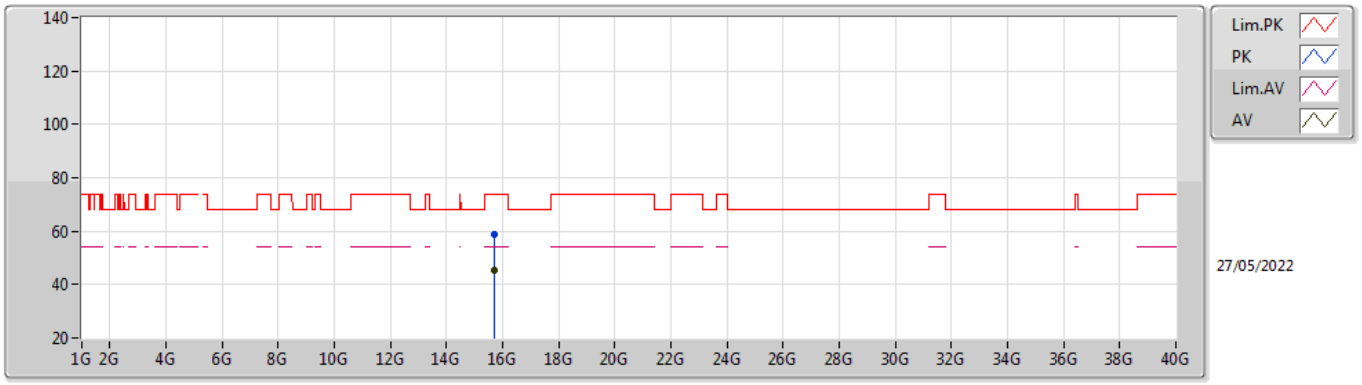


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.72624G	58.77	74.00	-15.23	43.47	3	Horizontal	168	1.62	-	37.60	13.26	35.56
AV	15.7224G	45.35	54.00	-8.65	30.06	3	Horizontal	168	1.62	-	37.59	13.26	35.56

802.11a_Nss1,(6Mbps)_1TX

5260MHz_TnomVnom

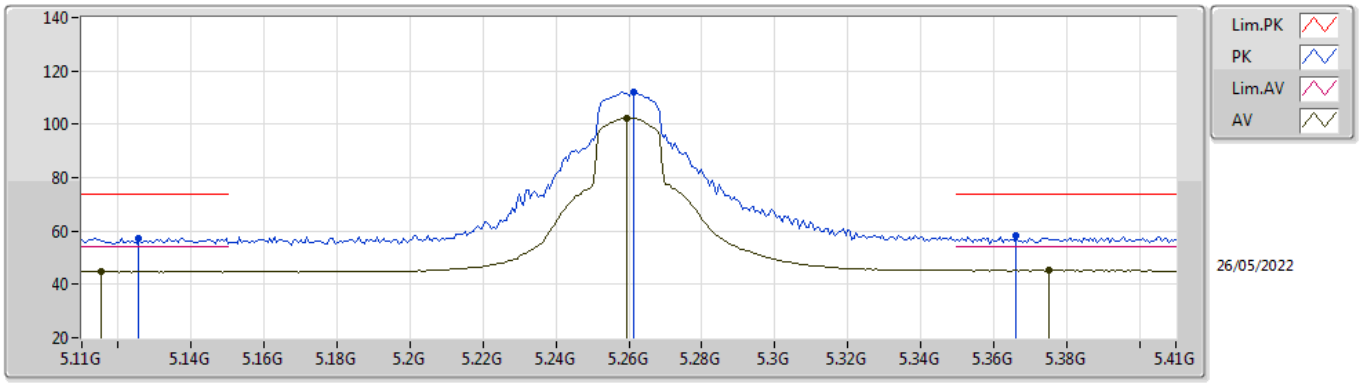


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1256G	57.26	74.00	-16.74	51.49	3	Vertical	26	1.84	-	33.95	7.16	35.34
AV	5.1154G	44.77	54.00	-9.23	39.01	3	Vertical	26	1.84	-	33.93	7.16	35.33
PK	5.2612G	112.17	Inf	-Inf	105.89	3	Vertical	26	1.84	-	34.42	7.20	35.34
AV	5.2594G	102.42	Inf	-Inf	96.14	3	Vertical	26	1.84	-	34.42	7.20	35.34
PK	5.3662G	58.05	74.00	-15.95	51.66	3	Vertical	26	1.84	-	34.53	7.20	35.34
AV	5.3752G	45.29	54.00	-8.71	38.89	3	Vertical	26	1.84	-	34.55	7.20	35.35

802.11a_Nss1,(6Mbps)_1TX

5260MHz_TnomVnom

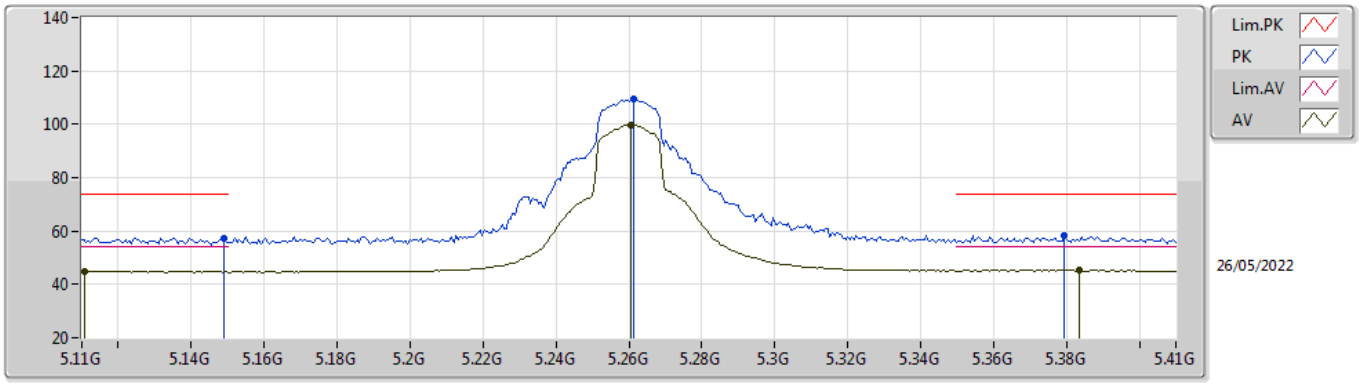


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.149G	57.43	74.00	-16.57	51.60	3	Horizontal	54	1.85	-	34.00	7.17	35.34
AV	5.1106G	44.73	54.00	-9.27	38.98	3	Horizontal	54	1.85	-	33.92	7.16	35.33
PK	5.2612G	109.36	Inf	-Inf	103.08	3	Horizontal	54	1.85	-	34.42	7.20	35.34
AV	5.2606G	99.59	Inf	-Inf	93.31	3	Horizontal	54	1.85	-	34.42	7.20	35.34
PK	5.3794G	58.11	74.00	-15.89	51.70	3	Horizontal	54	1.85	-	34.56	7.20	35.35
AV	5.3836G	45.18	54.00	-8.82	38.76	3	Horizontal	54	1.85	-	34.57	7.20	35.35

802.11a_Nss1,(6Mbps)_1TX

5260MHz_TnomVnom

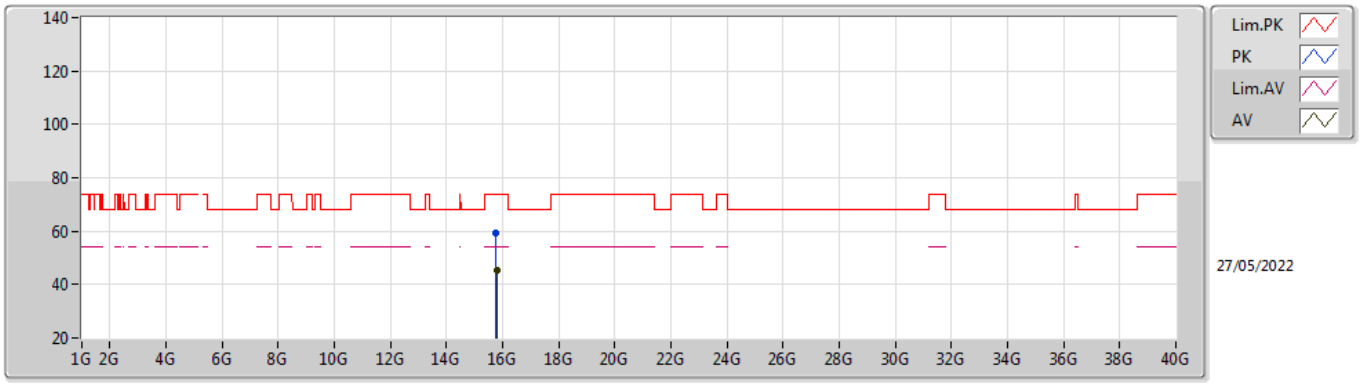


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.77706G	59.27	74.00	-14.73	43.77	3	Vertical	118	1.48	-	37.81	13.29	35.60
AV	15.78276G	45.59	54.00	-8.41	30.08	3	Vertical	118	1.48	-	37.83	13.29	35.61

802.11a_Nss1,(6Mbps)_1TX

5260MHz_TnomVnom

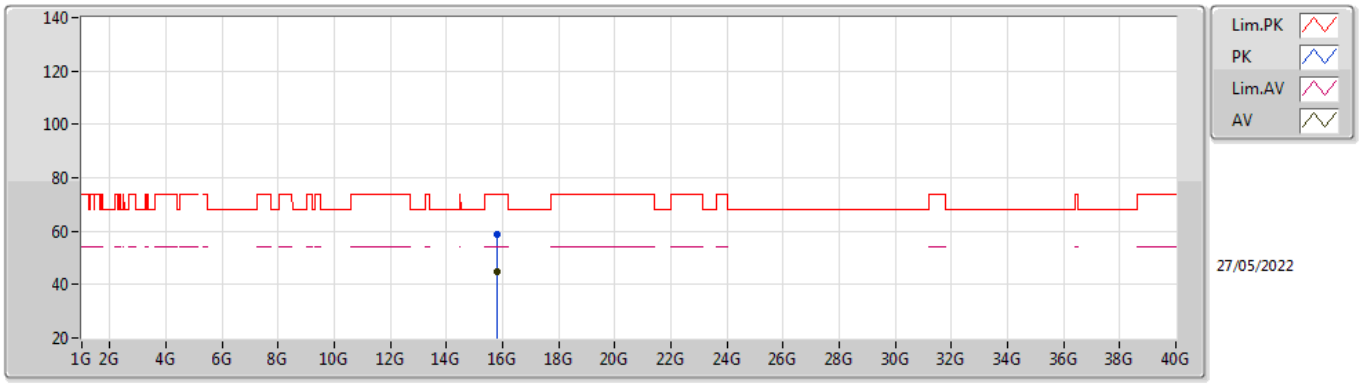


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7791G	58.68	74.00	-15.32	43.17	3	Horizontal	264	1.78	-	37.82	13.29	35.60
AV	15.77976G	44.97	54.00	-9.03	29.46	3	Horizontal	264	1.78	-	37.82	13.29	35.60

802.11a_Nss1,(6Mbps)_1TX

5300MHz_TnomVnom

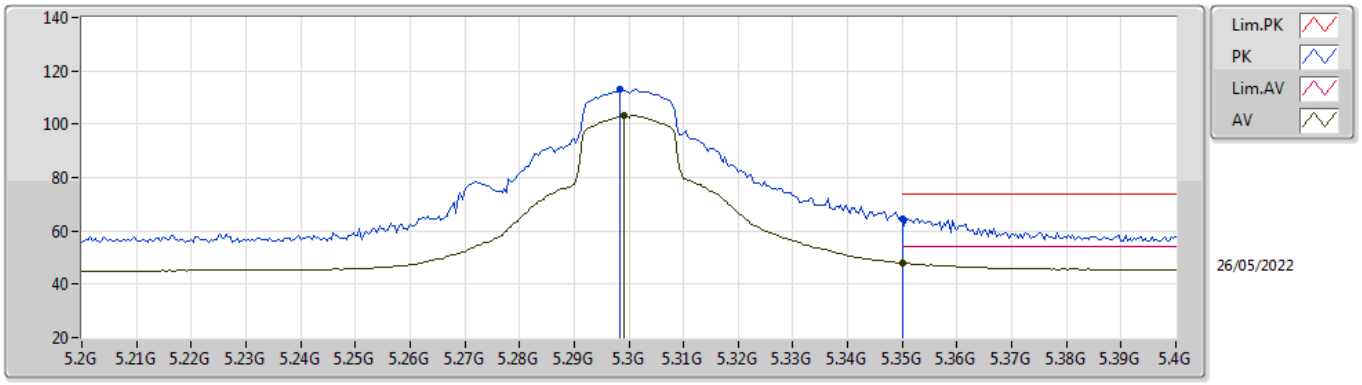


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2984G	112.95	Inf	-Inf	106.59	3	Vertical	35	1.92	-	34.50	7.20	35.34
AV	5.2992G	103.21	Inf	-Inf	96.85	3	Vertical	35	1.92	-	34.50	7.20	35.34
PK	5.35G	64.64	74.00	-9.36	58.28	3	Vertical	35	1.92	-	34.50	7.20	35.34
AV	5.35G	47.81	54.00	-6.19	41.45	3	Vertical	35	1.92	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5300MHz_TnomVnom

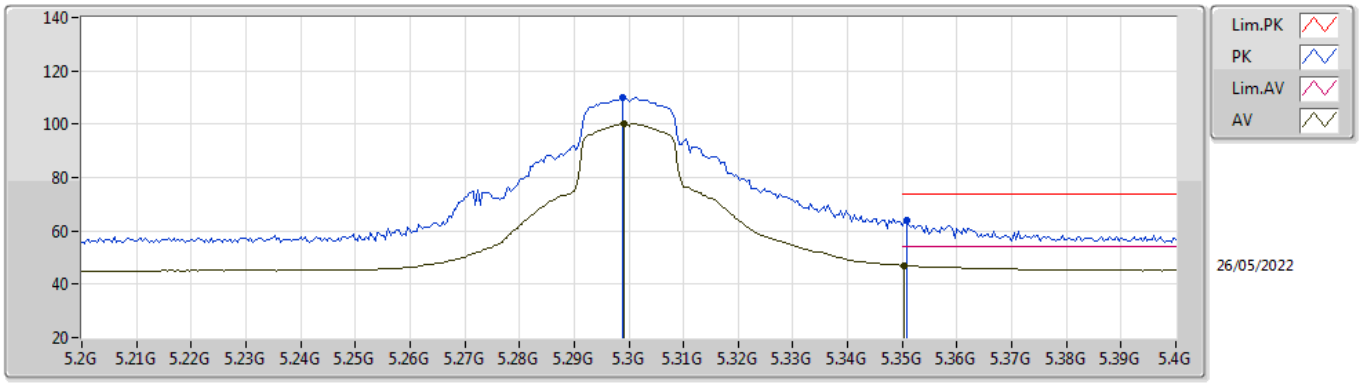


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2988G	109.96	Inf	-Inf	103.60	3	Horizontal	53	1.80	-	34.50	7.20	35.34
AV	5.2992G	100.17	Inf	-Inf	93.81	3	Horizontal	53	1.80	-	34.50	7.20	35.34
PK	5.3508G	64.10	74.00	-9.90	57.74	3	Horizontal	53	1.80	-	34.50	7.20	35.34
AV	5.3504G	47.03	54.00	-6.97	40.67	3	Horizontal	53	1.80	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5300MHz_TnomVnom

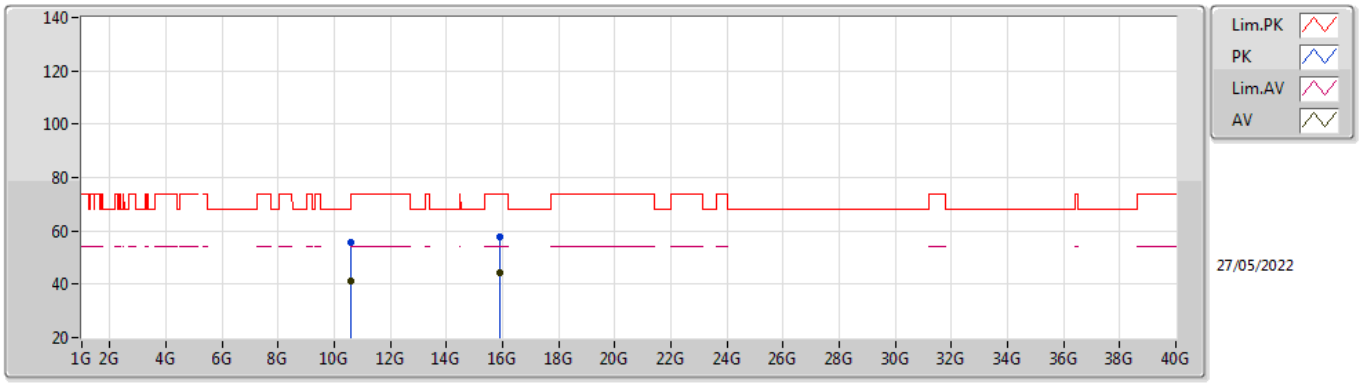


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60706G	55.48	74.00	-18.52	42.06	3	Vertical	74	1.71	-	38.21	10.59	35.38
AV	10.60174G	41.19	54.00	-12.81	27.78	3	Vertical	74	1.71	-	38.20	10.59	35.38
PK	15.909G	57.99	74.00	-16.01	42.77	3	Vertical	337	1.10	-	37.58	13.35	35.71
AV	15.8874G	44.14	54.00	-9.86	28.86	3	Vertical	337	1.10	-	37.64	13.34	35.70

802.11a_Nss1,(6Mbps)_1TX

5300MHz_TnomVnom

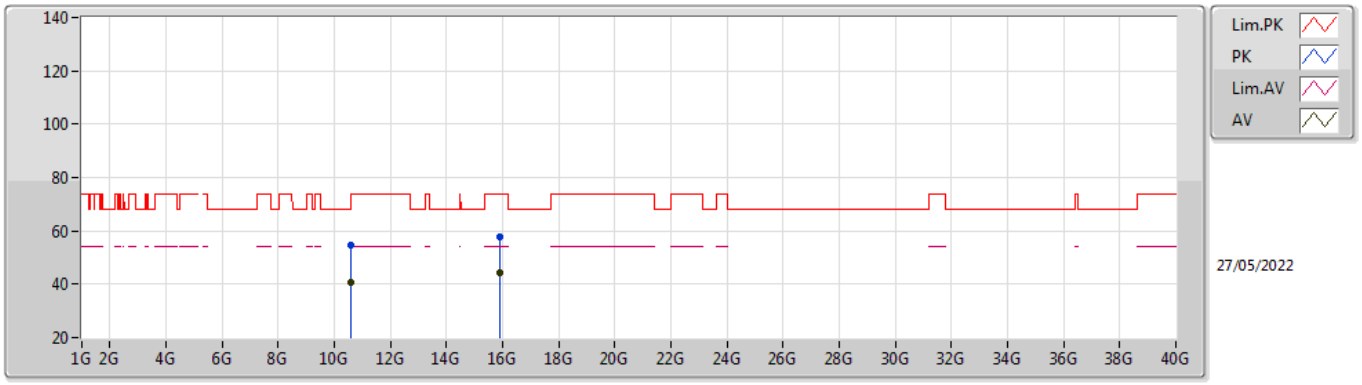


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6G	54.44	74.00	-19.56	41.03	3	Horizontal	141	1.80	-	38.20	10.59	35.38
AV	10.60102G	40.48	54.00	-13.52	27.07	3	Horizontal	141	1.80	-	38.20	10.59	35.38
PK	15.9087G	57.86	74.00	-16.14	42.64	3	Horizontal	127	1.34	-	37.58	13.35	35.71
AV	15.90024G	44.13	54.00	-9.87	28.89	3	Horizontal	127	1.34	-	37.60	13.35	35.71

802.11a_Nss1,(6Mbps)_1TX

5320MHz_TnomVnom

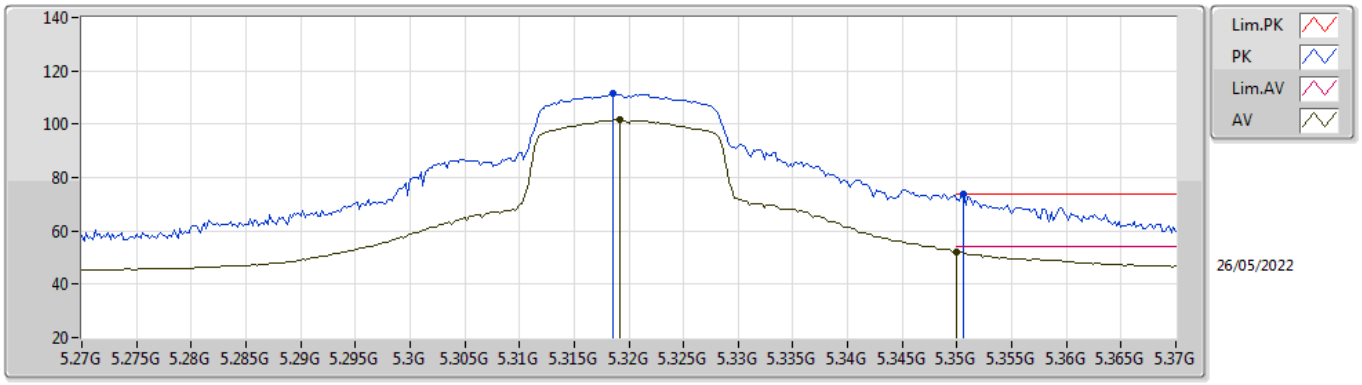


EUT Z_1TX
Setting 17.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3186G	111.50	Inf	-Inf	105.14	3	Vertical	30	1.93	-	34.50	7.20	35.34
AV	5.3192G	101.66	Inf	-Inf	95.30	3	Vertical	30	1.93	-	34.50	7.20	35.34
PK	5.3506G	73.77	74.00	-0.23	67.41	3	Vertical	30	1.93	-	34.50	7.20	35.34
AV	5.35G	52.10	54.00	-1.90	45.74	3	Vertical	30	1.93	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5320MHz_TnomVnom

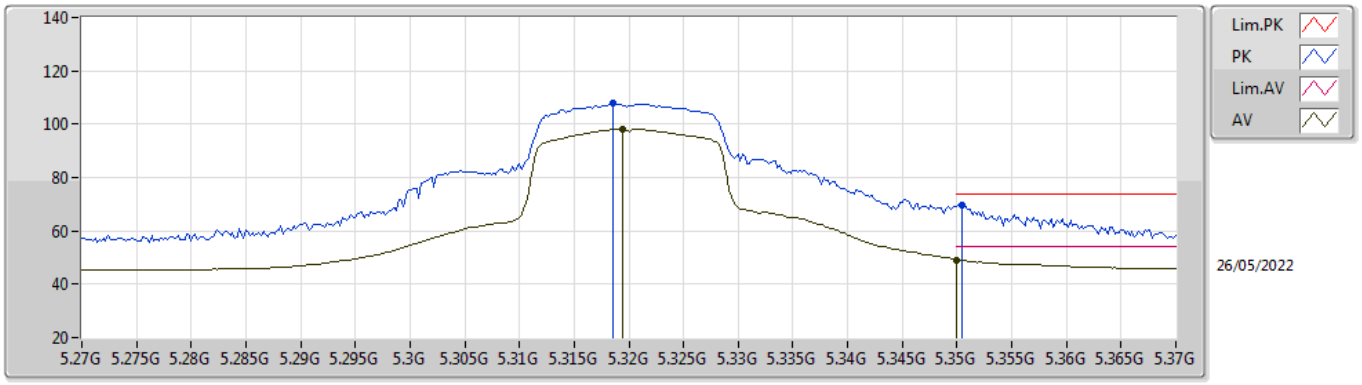


EUT Z_1TX
Setting 17.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3186G	107.93	Inf	-Inf	101.57	3	Horizontal	55	1.80	-	34.50	7.20	35.34
AV	5.3194G	98.14	Inf	-Inf	91.78	3	Horizontal	55	1.80	-	34.50	7.20	35.34
PK	5.3504G	69.90	74.00	-4.10	63.54	3	Horizontal	55	1.80	-	34.50	7.20	35.34
AV	5.35G	49.21	54.00	-4.79	42.85	3	Horizontal	55	1.80	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5320MHz_TnomVnom

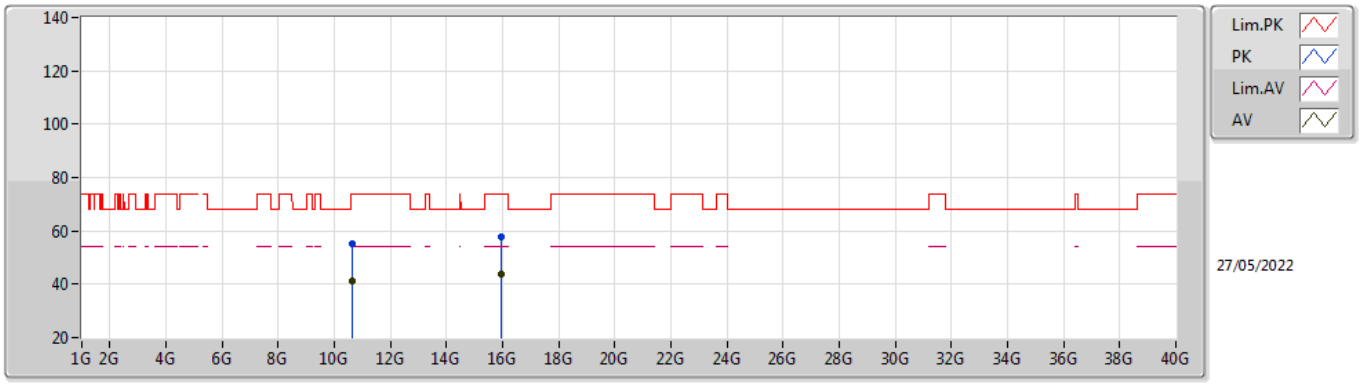


EUT X_1TX
Setting 17.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.63976G	55.06	74.00	-18.94	41.53	3	Vertical	145	1.82	-	38.28	10.60	35.35
AV	10.64204G	41.13	54.00	-12.87	27.60	3	Vertical	145	1.82	-	38.28	10.60	35.35
PK	15.95724G	57.55	74.00	-16.45	42.43	3	Vertical	158	2.59	-	37.49	13.38	35.75
AV	15.96078G	43.93	54.00	-10.07	28.83	3	Vertical	158	2.59	-	37.48	13.38	35.76

802.11a_Nss1,(6Mbps)_1TX

5320MHz_TnomVnom

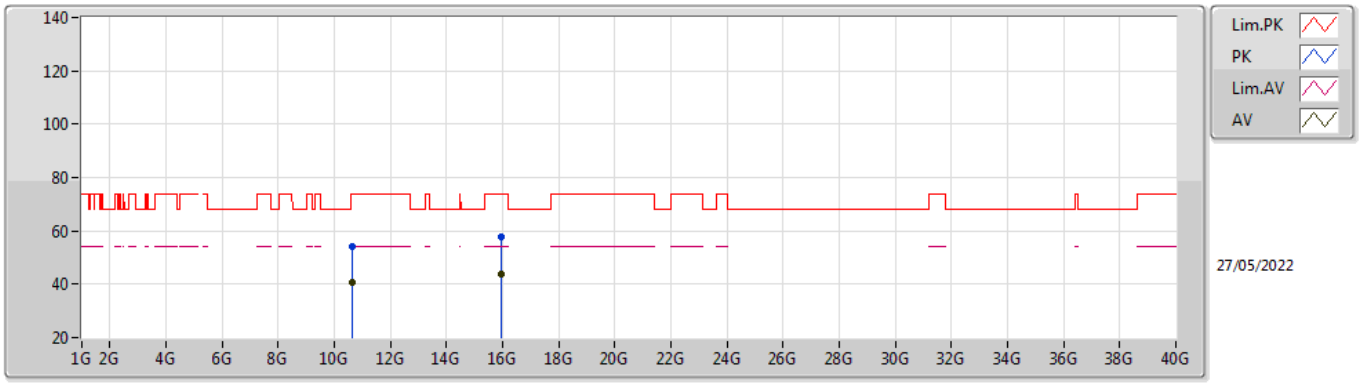


EUT X_1TX
Setting 17.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.64102G	54.17	74.00	-19.83	40.64	3	Horizontal	342	2.18	-	38.28	10.60	35.35
AV	10.64072G	40.80	54.00	-13.20	27.27	3	Horizontal	342	2.18	-	38.28	10.60	35.35
PK	15.96672G	57.63	74.00	-16.37	42.54	3	Horizontal	197	1.07	-	37.47	13.38	35.76
AV	15.96642G	43.73	54.00	-10.27	28.64	3	Horizontal	197	1.07	-	37.47	13.38	35.76

802.11a_Nss1,(6Mbps)_1TX

5500MHz_TnomVnom

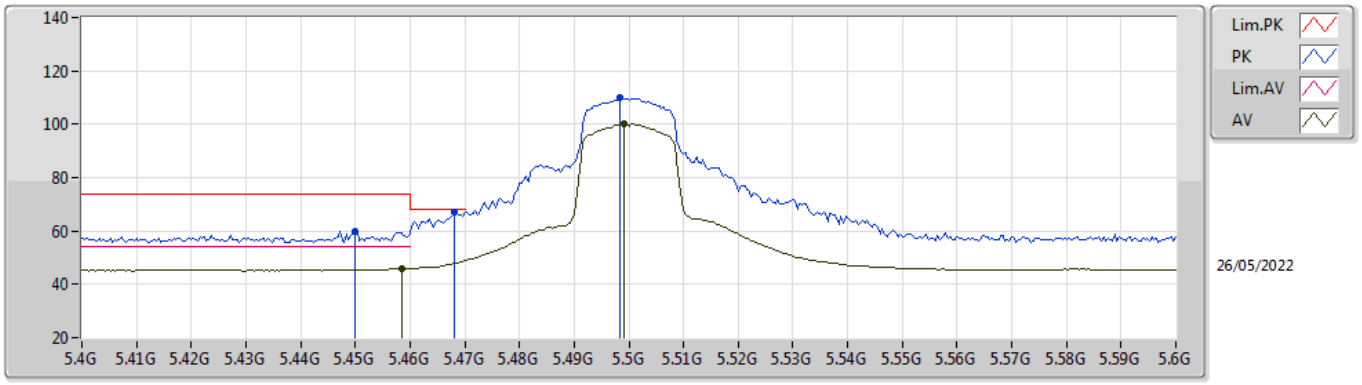


EUT Z_1TX
Setting 18.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.45G	59.97	74.00	-14.03	53.57	3	Vertical	29	1.80	-	34.50	7.25	35.35
AV	5.4584G	45.84	54.00	-8.16	39.41	3	Vertical	29	1.80	-	34.52	7.26	35.35
PK	5.468G	67.29	68.20	-0.91	60.83	3	Vertical	29	1.80	-	34.54	7.27	35.35
PK	5.4984G	109.90	Inf	-Inf	103.35	3	Vertical	29	1.80	-	34.60	7.30	35.35
AV	5.4992G	100.11	Inf	-Inf	93.56	3	Vertical	29	1.80	-	34.60	7.30	35.35

802.11a_Nss1,(6Mbps)_1TX

5500MHz_TnomVnom

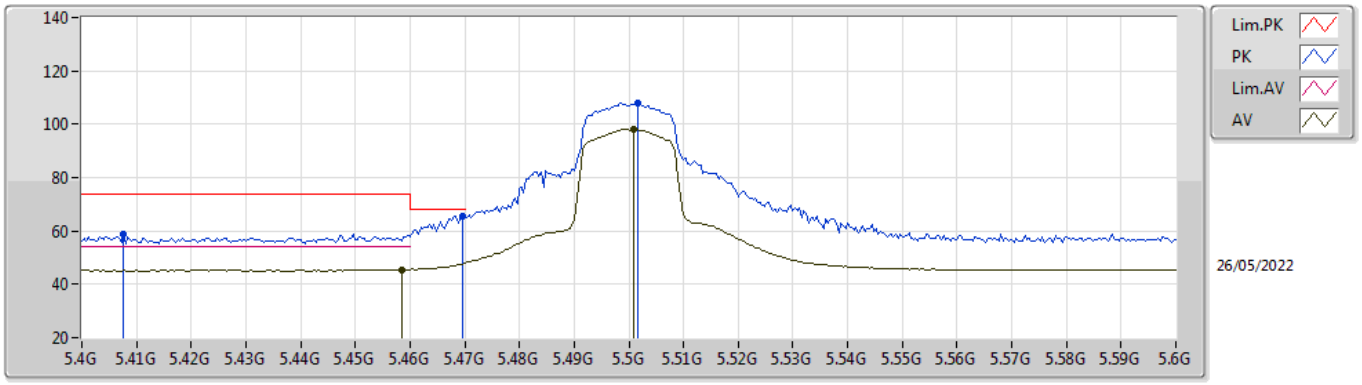


EUT Z_1TX
Setting 18.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4076G	58.97	74.00	-15.03	52.53	3	Horizontal	53	1.85	-	34.58	7.21	35.35
PK	5.4696G	65.61	68.20	-2.59	59.15	3	Horizontal	53	1.85	-	34.54	7.27	35.35
AV	5.4584G	45.51	54.00	-8.49	39.08	3	Horizontal	53	1.85	-	34.52	7.26	35.35
PK	5.5016G	107.83	Inf	-Inf	101.28	3	Horizontal	53	1.85	-	34.60	7.30	35.35
AV	5.5008G	98.11	Inf	-Inf	91.56	3	Horizontal	53	1.85	-	34.60	7.30	35.35

802.11a_Nss1,(6Mbps)_1TX

5500MHz_TnomVnom

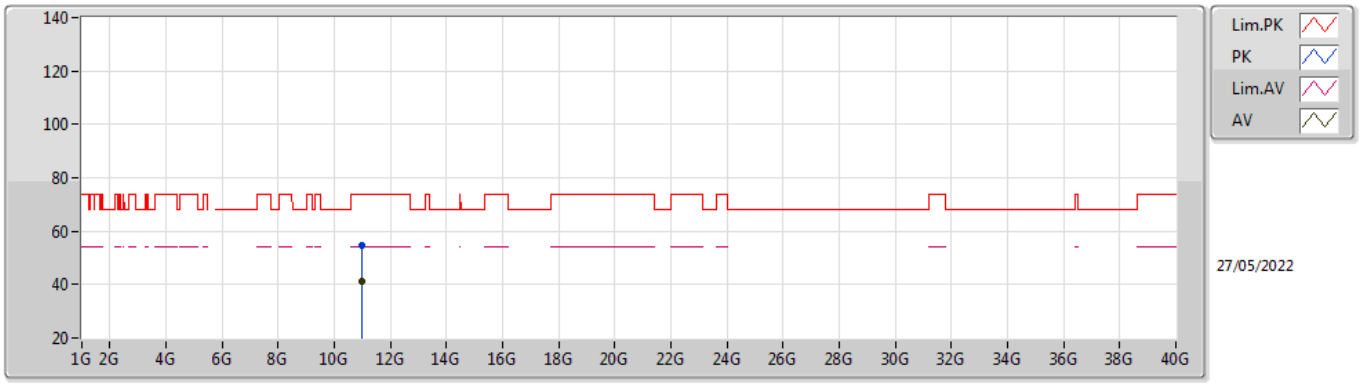


EUT X_1TX
Setting 18.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.00006G	54.87	74.00	-19.13	40.86	3	Vertical	252	1.60	-	38.40	10.65	35.04
AV	11.00114G	41.18	54.00	-12.82	27.17	3	Vertical	252	1.60	-	38.40	10.65	35.04

802.11a_Nss1,(6Mbps)_1TX

5500MHz_TnomVnom

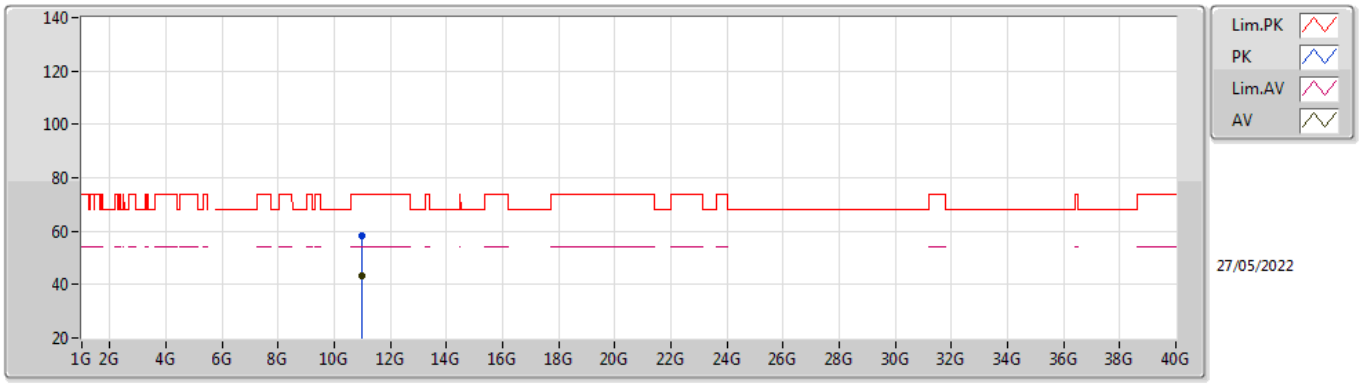


EUT X_1TX
Setting 18.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.99766G	58.15	74.00	-15.85	44.14	3	Horizontal	137	2.19	-	38.40	10.65	35.04
AV	11.0012G	43.23	54.00	-10.77	29.22	3	Horizontal	137	2.19	-	38.40	10.65	35.04

802.11a_Nss1,(6Mbps)_1TX

5580MHz_TnomVnom

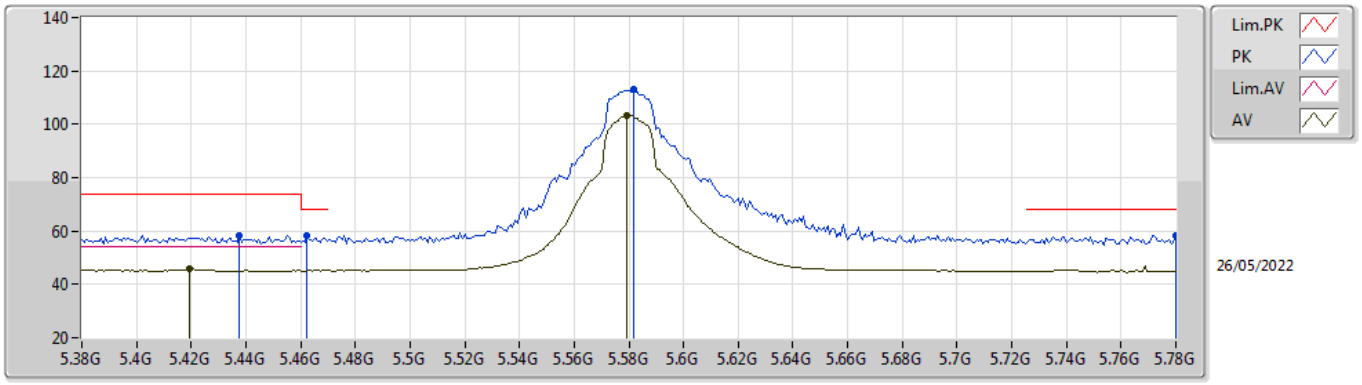


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4376G	58.45	74.00	-15.55	52.04	3	Vertical	31	1.87	-	34.52	7.24	35.35
AV	5.4192G	45.73	54.00	-8.27	39.30	3	Vertical	31	1.87	-	34.56	7.22	35.35
PK	5.4624G	58.17	68.20	-10.03	51.74	3	Vertical	31	1.87	-	34.52	7.26	35.35
PK	5.5816G	112.89	Inf	-Inf	106.30	3	Vertical	31	1.87	-	34.60	7.38	35.39
AV	5.5792G	103.16	Inf	-Inf	96.57	3	Vertical	31	1.87	-	34.60	7.38	35.39
PK	5.78G	58.36	68.20	-9.84	52.25	3	Vertical	31	1.87	-	34.20	7.40	35.49

802.11a_Nss1,(6Mbps)_1TX

5580MHz_TnomVnom

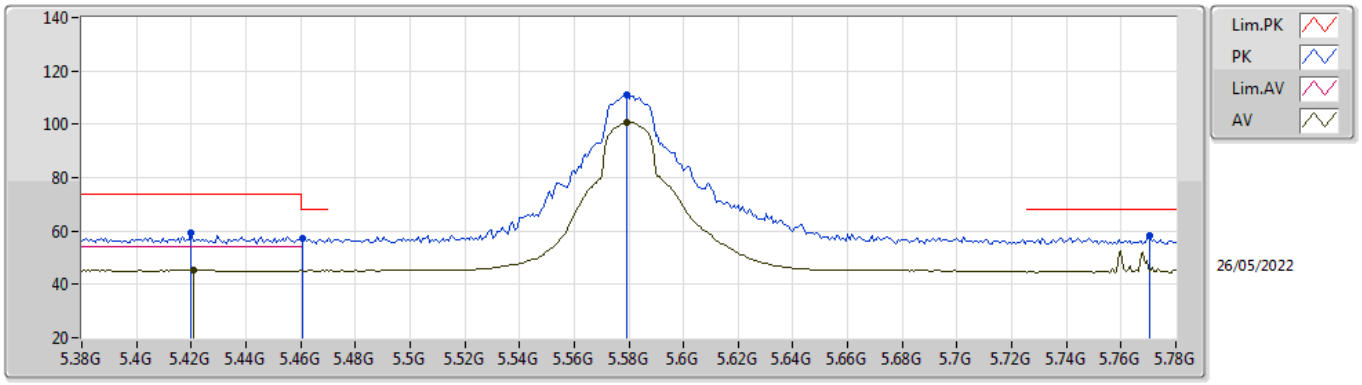


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.42G	59.37	74.00	-14.63	52.94	3	Horizontal	53	1.78	-	34.56	7.22	35.35
AV	5.4208G	45.53	54.00	-8.47	39.10	3	Horizontal	53	1.78	-	34.56	7.22	35.35
PK	5.4608G	57.29	68.20	-10.91	50.86	3	Horizontal	53	1.78	-	34.52	7.26	35.35
PK	5.5792G	110.86	Inf	-Inf	104.27	3	Horizontal	53	1.78	-	34.60	7.38	35.39
AV	5.5792G	100.85	Inf	-Inf	94.26	3	Horizontal	53	1.78	-	34.60	7.38	35.39
PK	5.7704G	58.31	68.20	-9.89	52.20	3	Horizontal	53	1.78	-	34.20	7.40	35.49

802.11a_Nss1,(6Mbps)_1TX

5580MHz_TnomVnom

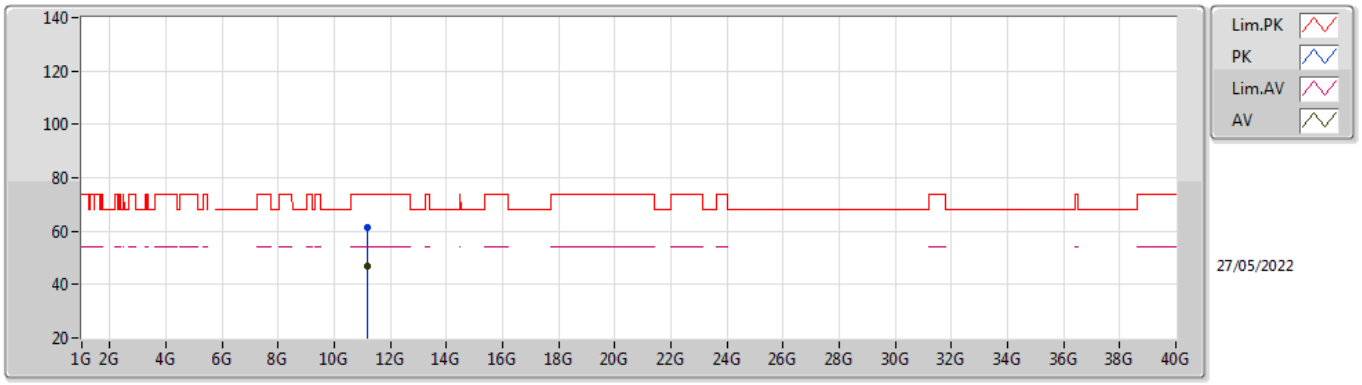


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.16198G	61.16	74.00	-12.84	47.15	3	Vertical	178	3.00	-	38.56	10.67	35.22
AV	11.16G	46.99	54.00	-7.01	32.98	3	Vertical	178	3.00	-	38.56	10.67	35.22

802.11a_Nss1,(6Mbps)_1TX

5580MHz_TnomVnom

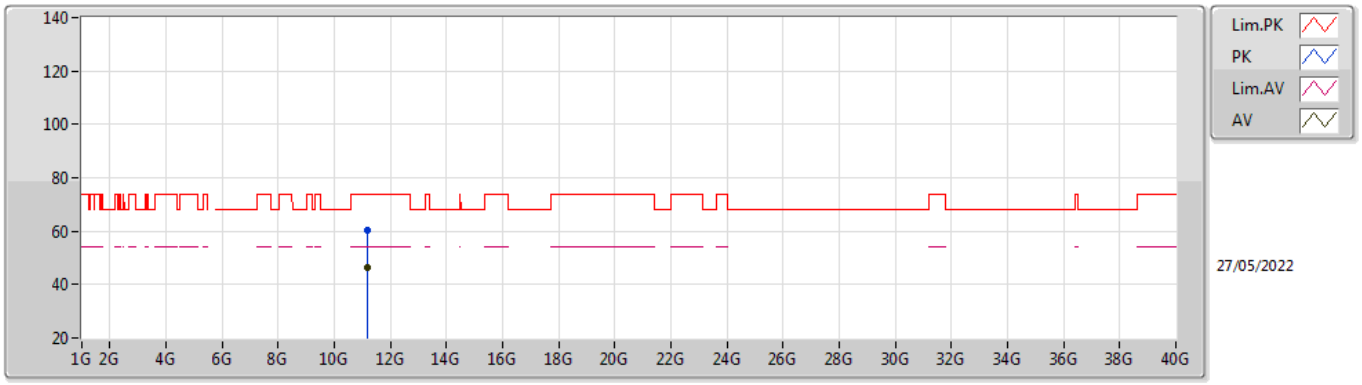


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.16192G	60.18	74.00	-13.82	46.17	3	Horizontal	301	1.16	-	38.56	10.67	35.22
AV	11.16174G	46.33	54.00	-7.67	32.32	3	Horizontal	301	1.16	-	38.56	10.67	35.22

802.11a_Nss1,(6Mbps)_1TX

5700MHz_TnomVnom

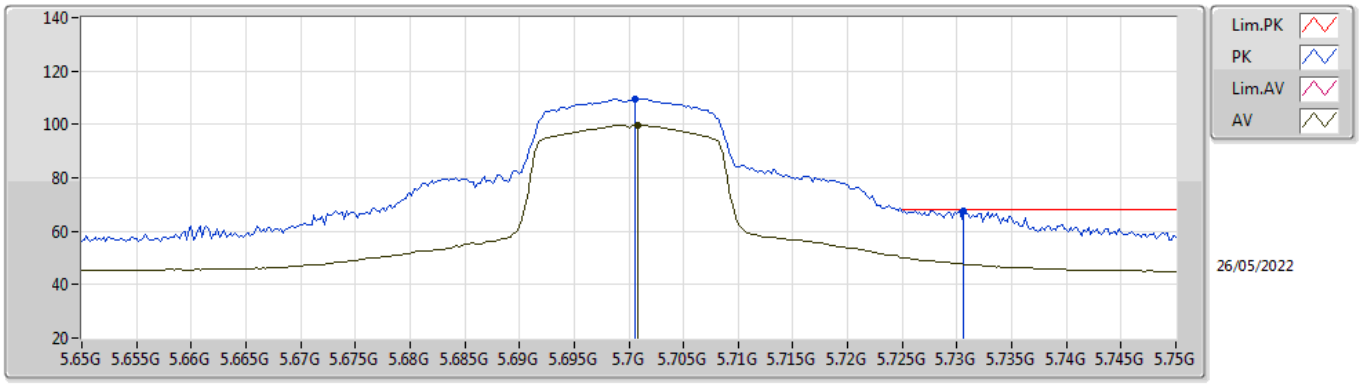


EUT Z_1TX
Setting 16.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7006G	109.61	Inf	-Inf	103.36	3	Vertical	32	1.80	-	34.30	7.40	35.45
AV	5.7008G	99.82	Inf	-Inf	93.57	3	Vertical	32	1.80	-	34.30	7.40	35.45
PK	5.7306G	67.84	68.20	-0.36	61.67	3	Vertical	32	1.80	-	34.24	7.40	35.47

802.11a_Nss1,(6Mbps)_1TX

5700MHz_TnomVnom

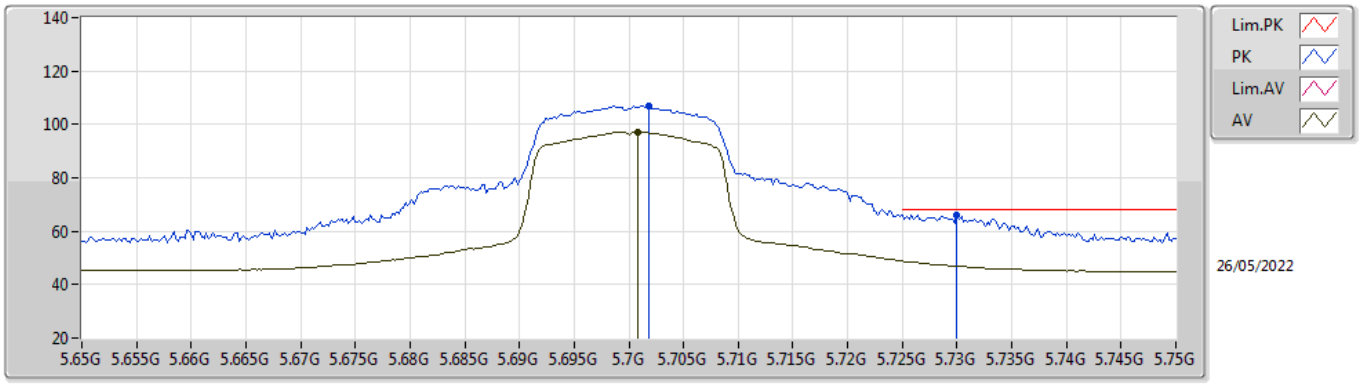


EUT Z_1TX
Setting 16.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7018G	106.85	Inf	-Inf	100.60	3	Horizontal	45	1.89	-	34.30	7.40	35.45
AV	5.7008G	97.17	Inf	-Inf	90.92	3	Horizontal	45	1.89	-	34.30	7.40	35.45
PK	5.73G	66.01	68.20	-2.19	59.84	3	Horizontal	45	1.89	-	34.24	7.40	35.47

802.11a_Nss1,(6Mbps)_1TX

5700MHz_TnomVnom

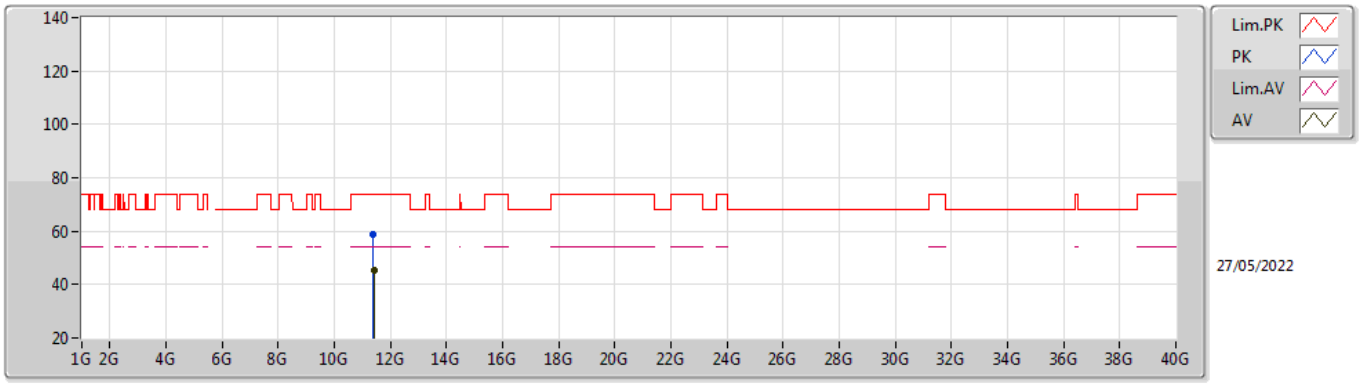


EUT X_1TX
Setting 16.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.39934G	58.84	74.00	-15.16	44.82	3	Vertical	323	2.76	-	38.80	10.71	35.49
AV	11.40168G	45.11	54.00	-8.89	31.09	3	Vertical	323	2.76	-	38.80	10.71	35.49

802.11a_Nss1,(6Mbps)_1TX

5700MHz_TnomVnom

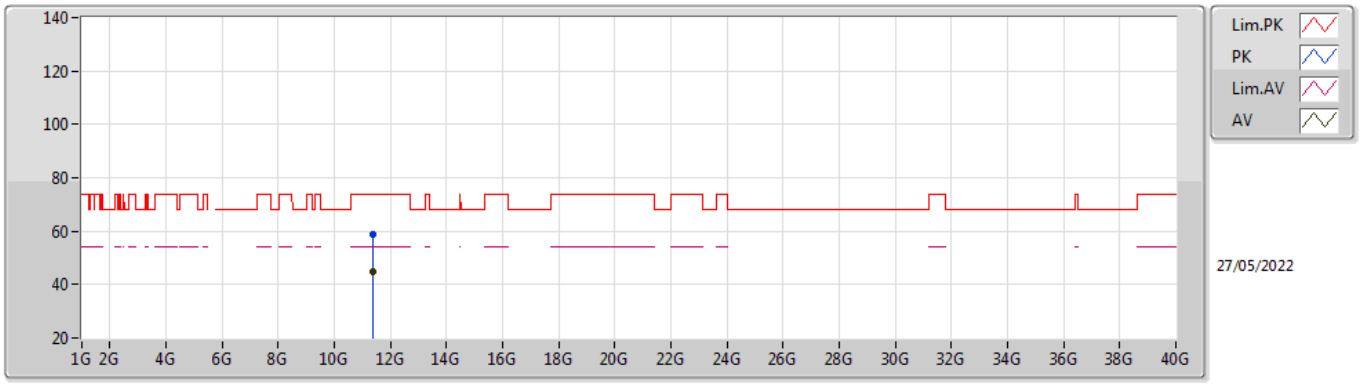


EUT X_1TX
Setting 16.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.39664G	58.97	74.00	-15.03	44.94	3	Horizontal	137	2.08	-	38.80	10.71	35.48
AV	11.40132G	44.71	54.00	-9.29	30.69	3	Horizontal	137	2.08	-	38.80	10.71	35.49

802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

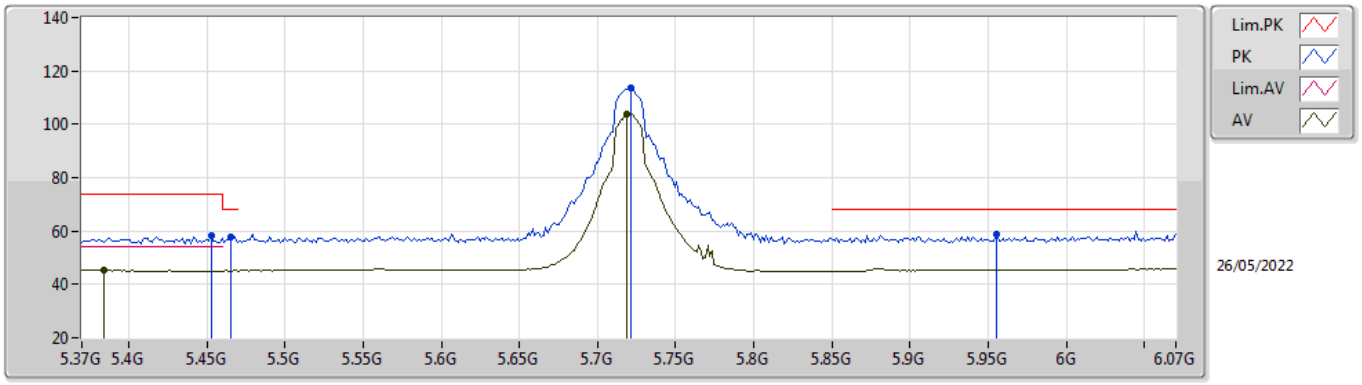


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4526G	58.03	74.00	-15.97	51.62	3	Vertical	30	1.90	-	34.51	7.25	35.35
AV	5.384G	45.16	54.00	-8.84	38.74	3	Vertical	30	1.90	-	34.57	7.20	35.35
PK	5.4652G	57.66	68.20	-10.54	51.21	3	Vertical	30	1.90	-	34.53	7.27	35.35
PK	5.7214G	113.52	Inf	-Inf	107.32	3	Vertical	30	1.90	-	34.26	7.40	35.46
AV	5.7186G	103.74	Inf	-Inf	97.54	3	Vertical	30	1.90	-	34.26	7.40	35.46
PK	5.9552G	58.65	68.20	-9.55	51.87	3	Vertical	30	1.90	-	34.80	7.56	35.58

802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

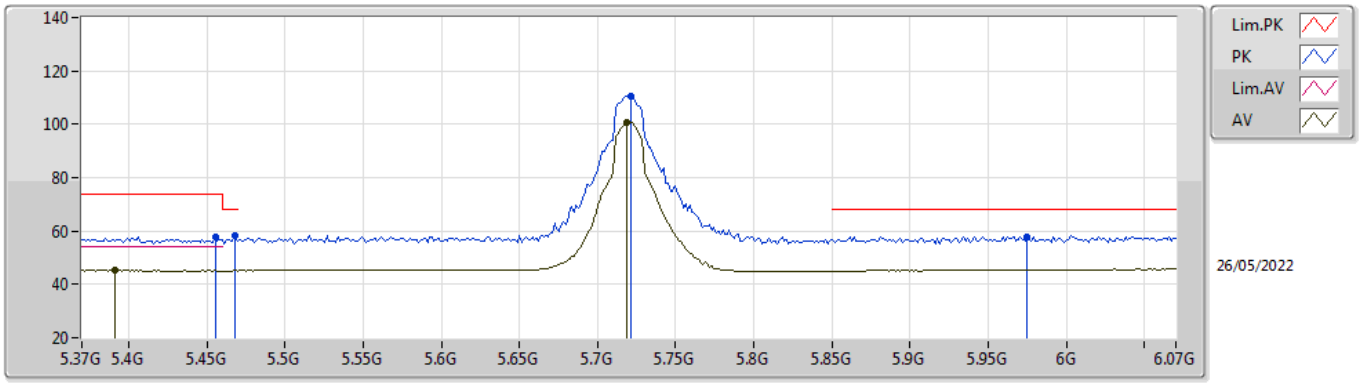


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4554G	57.76	74.00	-16.24	51.34	3	Horizontal	53	1.80	-	34.51	7.26	35.35
AV	5.391G	45.18	54.00	-8.82	38.75	3	Horizontal	53	1.80	-	34.58	7.20	35.35
PK	5.468G	58.12	68.20	-10.08	51.66	3	Horizontal	53	1.80	-	34.54	7.27	35.35
PK	5.7214G	110.45	Inf	-Inf	104.25	3	Horizontal	53	1.80	-	34.26	7.40	35.46
AV	5.7186G	100.72	Inf	-Inf	94.52	3	Horizontal	53	1.80	-	34.26	7.40	35.46
PK	5.9748G	57.98	68.20	-10.22	51.20	3	Horizontal	53	1.80	-	34.80	7.57	35.59

802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

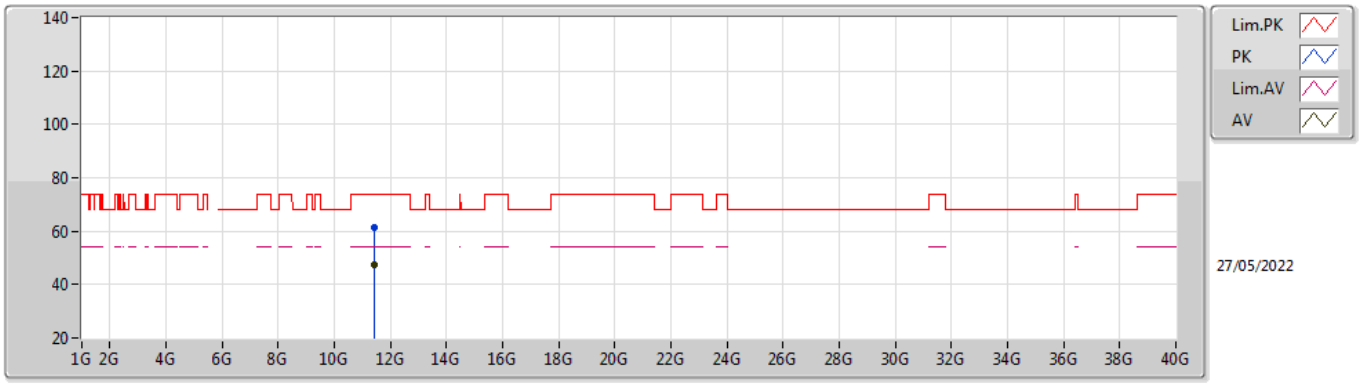


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.44342G	61.27	74.00	-12.73	47.20	3	Vertical	184	2.82	-	38.89	10.72	35.54
AV	11.43922G	47.23	54.00	-6.77	33.16	3	Vertical	184	2.82	-	38.88	10.72	35.53

802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

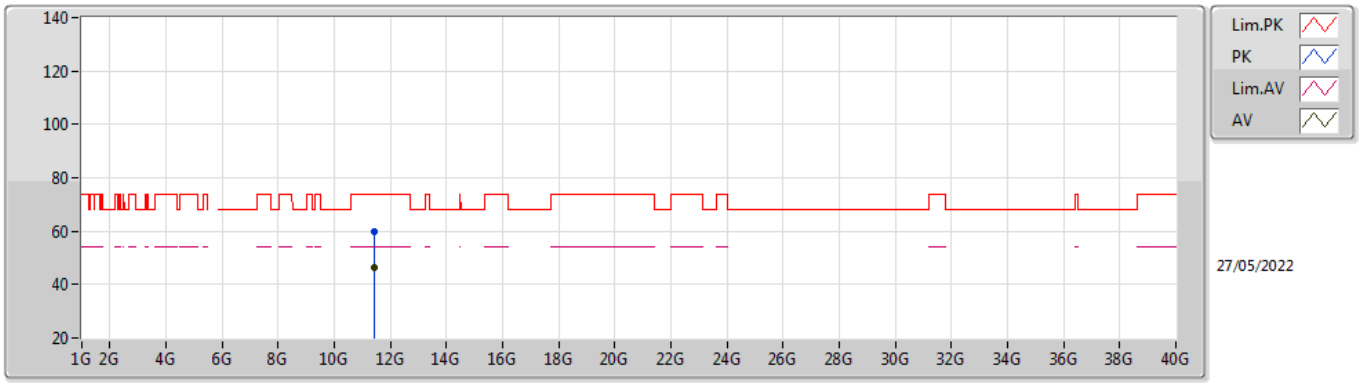


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.44204G	59.99	74.00	-14.01	45.93	3	Horizontal	141	2.05	-	38.88	10.72	35.54
AV	11.43976G	46.16	54.00	-7.84	32.09	3	Horizontal	141	2.05	-	38.88	10.72	35.53

802.11a_Nss1,(6Mbps)_1TX

5745MHz_TnomVnom

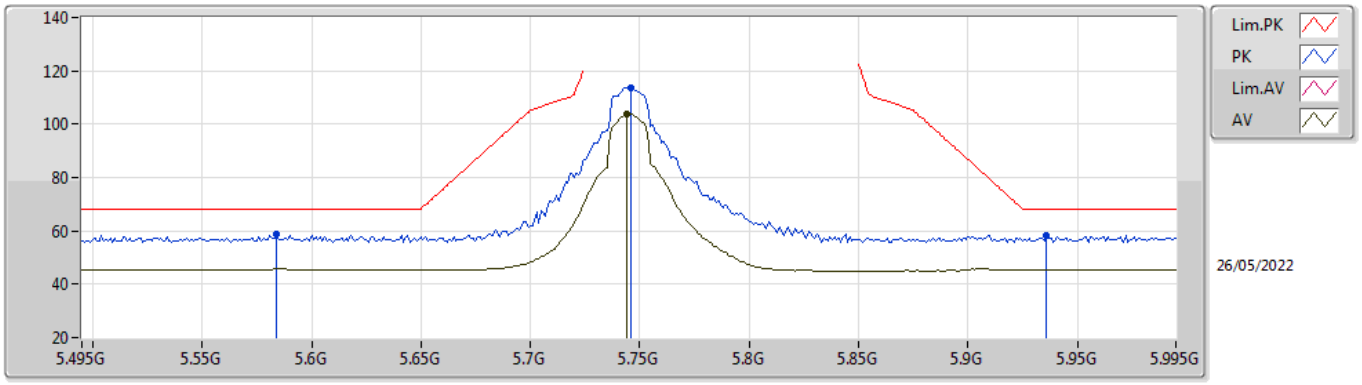


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.584G	58.84	68.20	-9.36	52.25	3	Vertical	32	1.88	-	34.60	7.38	35.39
PK	5.746G	113.48	Inf	-Inf	107.34	3	Vertical	32	1.88	-	34.21	7.40	35.47
AV	5.744G	103.70	Inf	-Inf	97.56	3	Vertical	32	1.88	-	34.21	7.40	35.47
PK	5.936G	58.27	68.20	-9.93	51.56	3	Vertical	32	1.88	-	34.74	7.54	35.57

802.11a_Nss1,(6Mbps)_1TX

5745MHz_TnomVnom

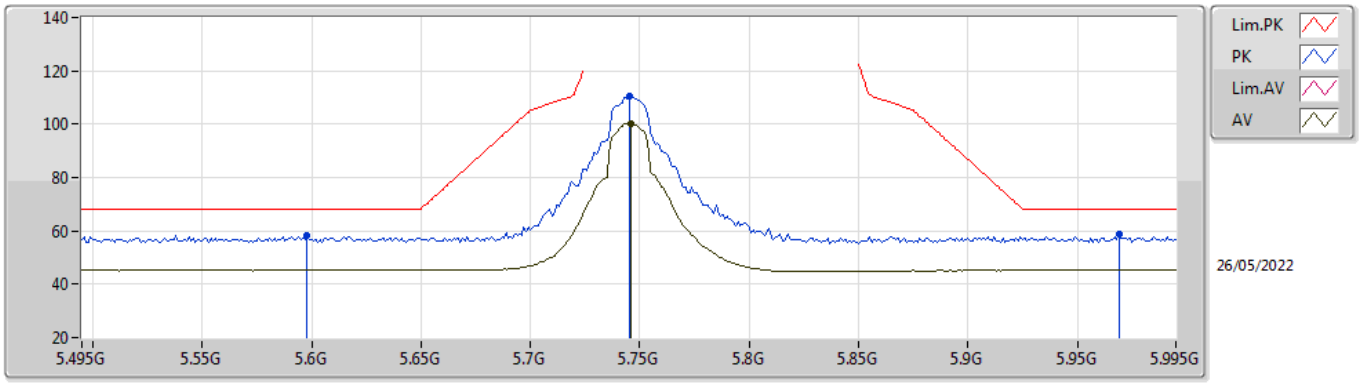


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.598G	58.26	68.20	-9.94	51.66	3	Horizontal	47	1.86	-	34.60	7.40	35.40
PK	5.745G	110.36	Inf	-Inf	104.22	3	Horizontal	47	1.86	-	34.21	7.40	35.47
AV	5.746G	100.33	Inf	-Inf	94.19	3	Horizontal	47	1.86	-	34.21	7.40	35.47
PK	5.969G	58.56	68.20	-9.64	51.77	3	Horizontal	47	1.86	-	34.80	7.57	35.58

802.11a_Nss1,(6Mbps)_1TX

5745MHz_TnomVnom

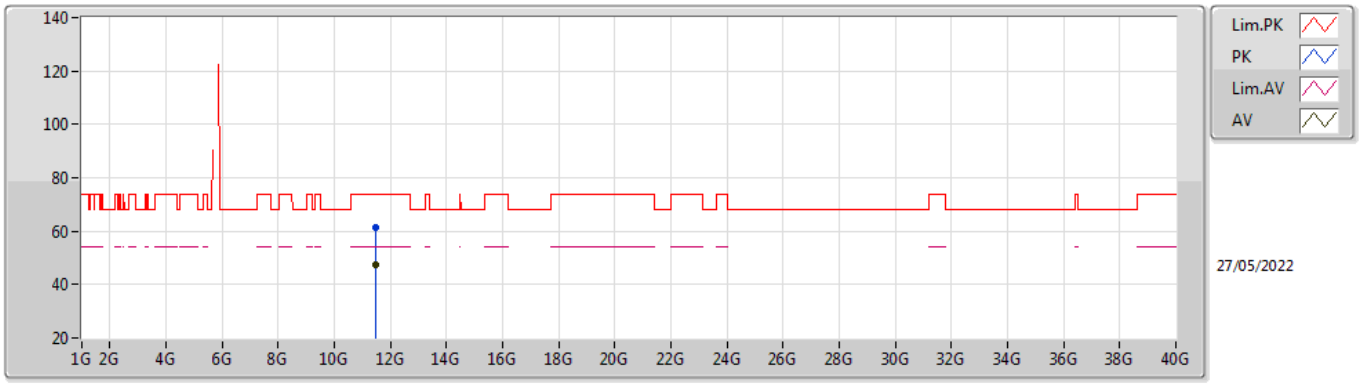


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4918G	61.21	74.00	-12.79	47.10	3	Vertical	181	3.00	-	38.98	10.72	35.59
AV	11.49138G	47.33	54.00	-6.67	33.22	3	Vertical	181	3.00	-	38.98	10.72	35.59

802.11a_Nss1,(6Mbps)_1TX

5745MHz_TnomVnom

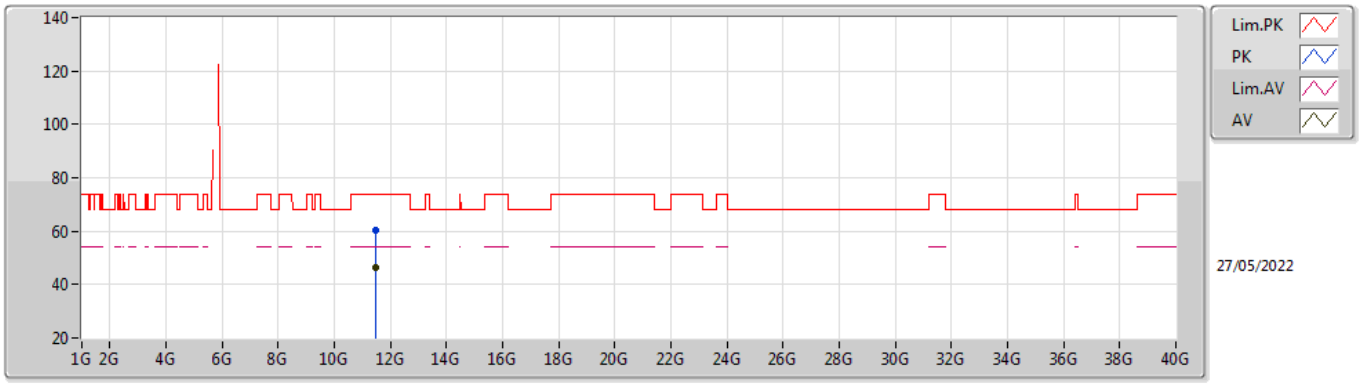


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.48838G	60.25	74.00	-13.75	46.14	3	Horizontal	140	2.08	-	38.98	10.72	35.59
AV	11.48946G	46.32	54.00	-7.68	32.21	3	Horizontal	140	2.08	-	38.98	10.72	35.59

802.11a_Nss1,(6Mbps)_1TX

5785MHz_TnomVnom

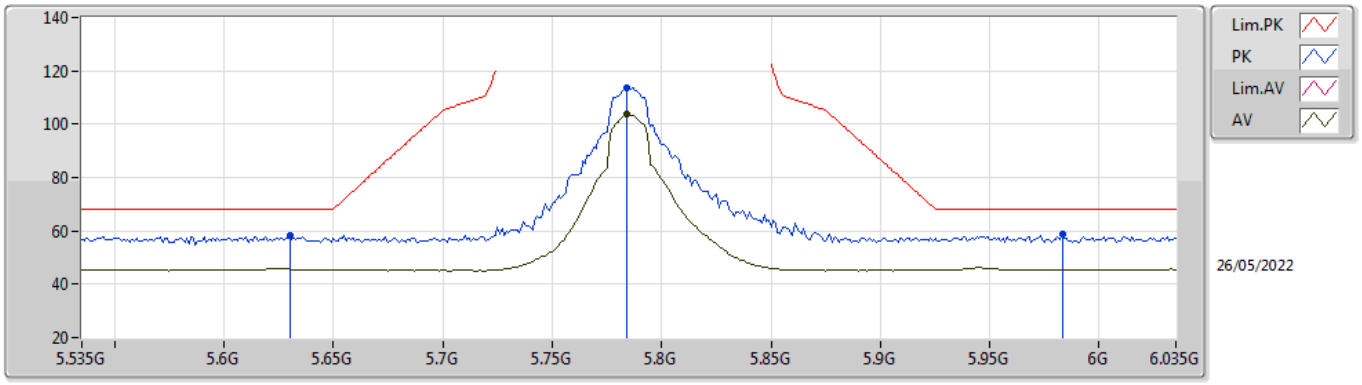


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.63G	58.48	68.20	-9.72	51.95	3	Vertical	31	1.80	-	34.54	7.40	35.41
PK	5.784G	113.74	Inf	-Inf	107.63	3	Vertical	31	1.80	-	34.20	7.40	35.49
AV	5.784G	103.73	Inf	-Inf	97.62	3	Vertical	31	1.80	-	34.20	7.40	35.49
PK	5.983G	58.59	68.20	-9.61	51.80	3	Vertical	31	1.80	-	34.80	7.58	35.59

802.11a_Nss1,(6Mbps)_1TX

5785MHz_TnomVnom

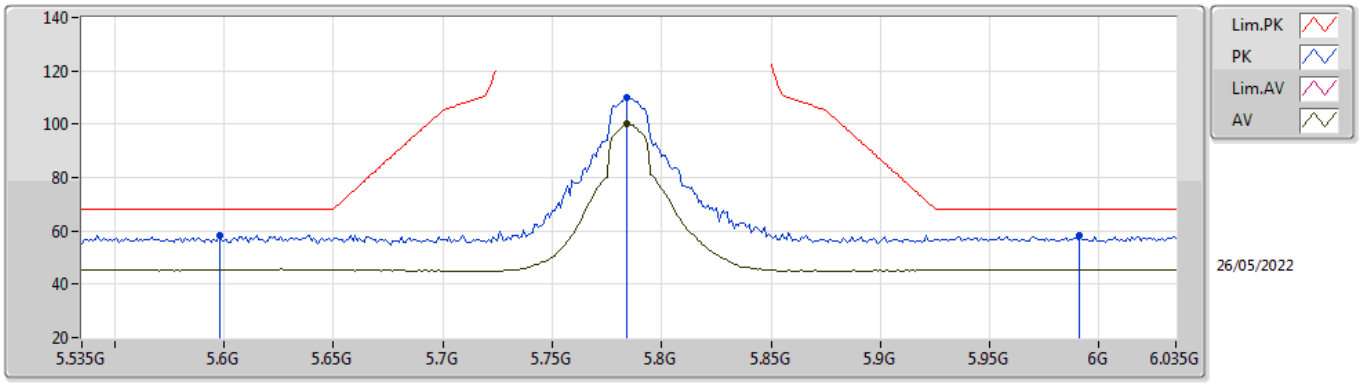


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.598G	58.34	68.20	-9.86	51.74	3	Horizontal	46	1.80	-	34.60	7.40	35.40
PK	5.784G	110.07	Inf	-Inf	103.96	3	Horizontal	46	1.80	-	34.20	7.40	35.49
AV	5.784G	100.08	Inf	-Inf	93.97	3	Horizontal	46	1.80	-	34.20	7.40	35.49
PK	5.991G	58.03	68.20	-10.17	51.24	3	Horizontal	46	1.80	-	34.80	7.59	35.60

802.11a_Nss1,(6Mbps)_1TX

5785MHz_TnomVnom

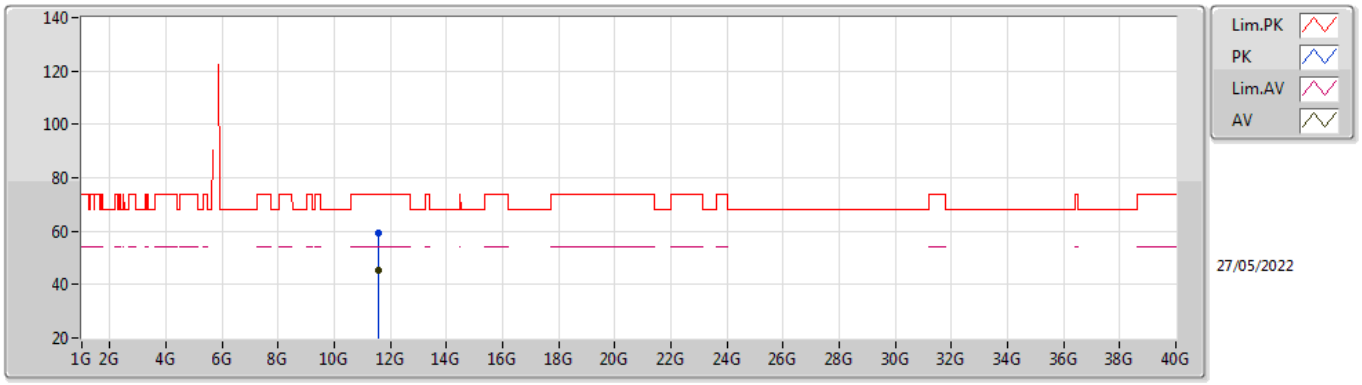


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.57186G	59.10	74.00	-14.90	44.65	3	Vertical	215	3.00	-	39.29	10.74	35.58
AV	11.57006G	45.14	54.00	-8.86	30.70	3	Vertical	215	3.00	-	39.28	10.74	35.58

802.11a_Nss1,(6Mbps)_1TX

5785MHz_TnomVnom

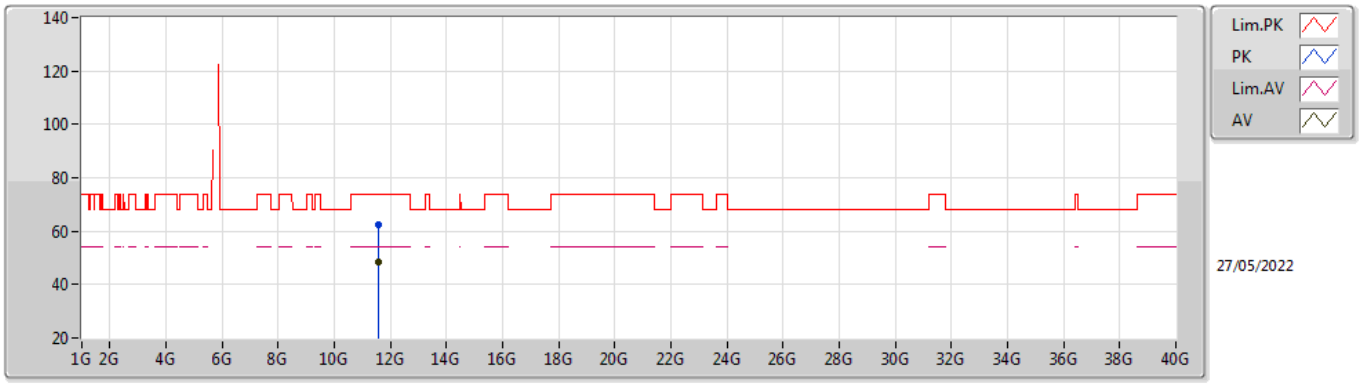


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5733G	62.40	74.00	-11.60	47.95	3	Horizontal	141	2.07	-	39.29	10.74	35.58
AV	11.57156G	48.35	54.00	-5.65	33.90	3	Horizontal	141	2.07	-	39.29	10.74	35.58

802.11a_Nss1,(6Mbps)_1TX

5825MHz_TnomVnom

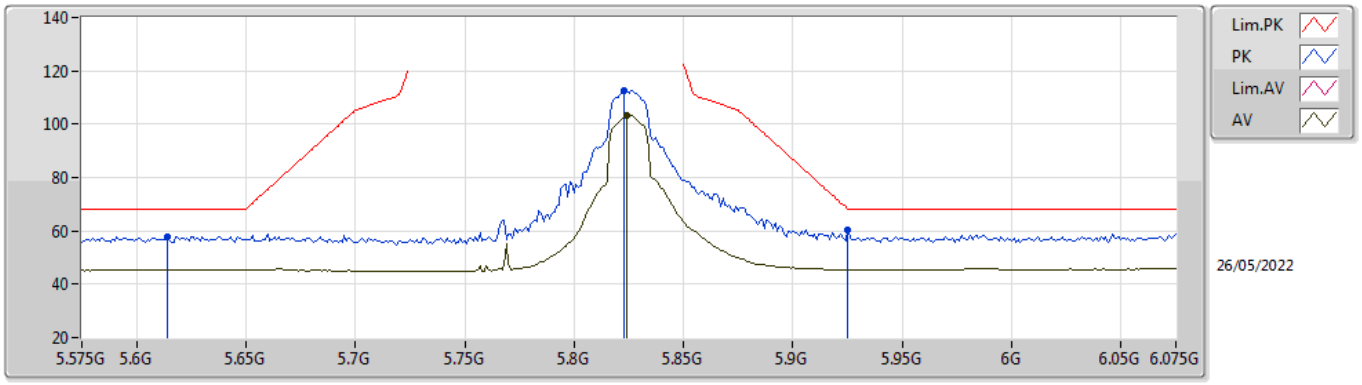


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.614G	57.90	68.20	-10.30	51.34	3	Vertical	30	1.92	-	34.57	7.40	35.41
PK	5.823G	112.58	Inf	-Inf	106.42	3	Vertical	30	1.92	-	34.25	7.42	35.51
AV	5.824G	103.15	Inf	-Inf	96.99	3	Vertical	30	1.92	-	34.25	7.42	35.51
PK	5.925G	60.50	68.20	-7.70	53.83	3	Vertical	30	1.92	-	34.70	7.53	35.56

802.11a_Nss1,(6Mbps)_1TX

5825MHz_TnomVnom

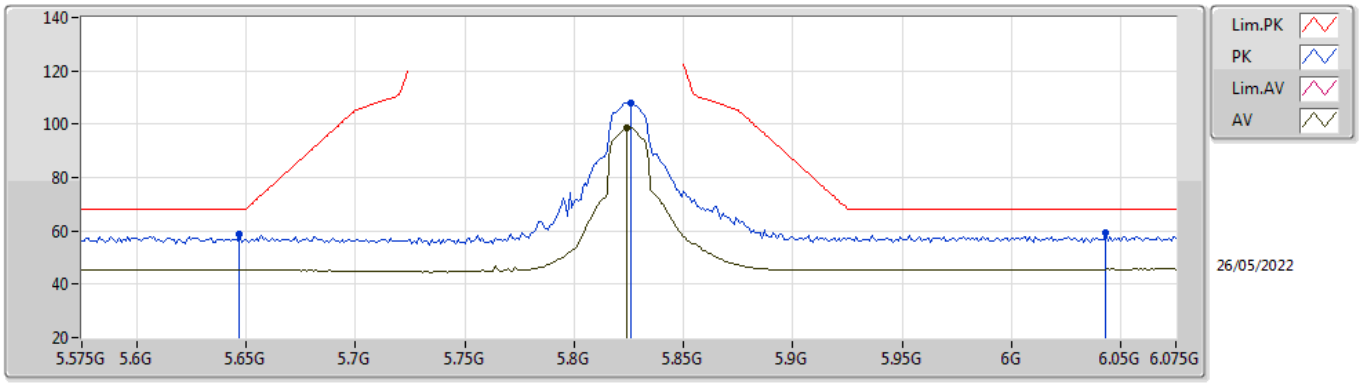


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.647G	58.54	68.20	-9.66	52.05	3	Horizontal	43	1.84	-	34.51	7.40	35.42
PK	5.826G	107.91	Inf	-Inf	101.74	3	Horizontal	43	1.84	-	34.25	7.43	35.51
AV	5.824G	98.41	Inf	-Inf	92.25	3	Horizontal	43	1.84	-	34.25	7.42	35.51
PK	6.043G	59.06	68.20	-9.14	52.13	3	Horizontal	43	1.84	-	34.89	7.62	35.58

802.11a_Nss1,(6Mbps)_1TX

5825MHz_TnomVnom

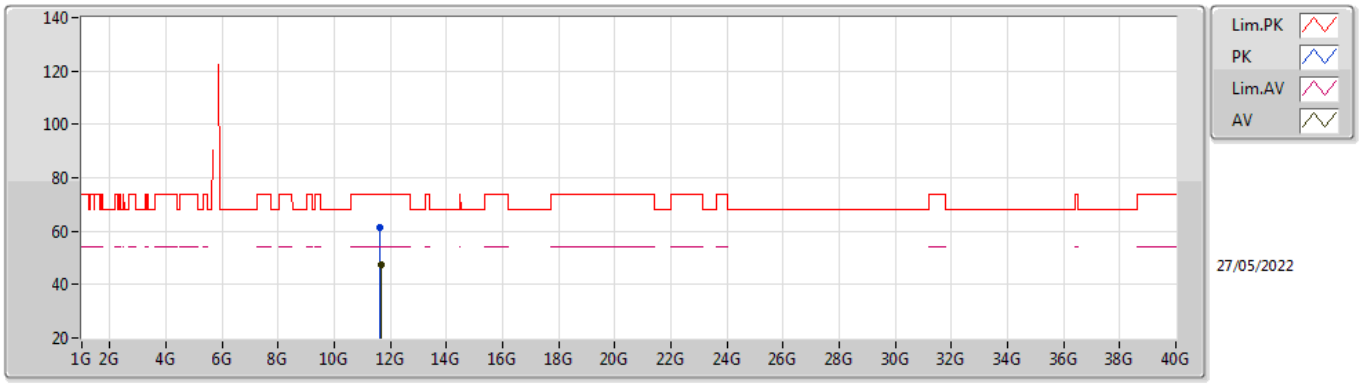


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6467G	61.32	74.00	-12.68	46.74	3	Vertical	201	2.42	-	39.40	10.75	35.57
AV	11.65156G	47.41	54.00	-6.59	32.83	3	Vertical	201	2.42	-	39.40	10.75	35.57

802.11a_Nss1,(6Mbps)_1TX

5825MHz_TnomVnom

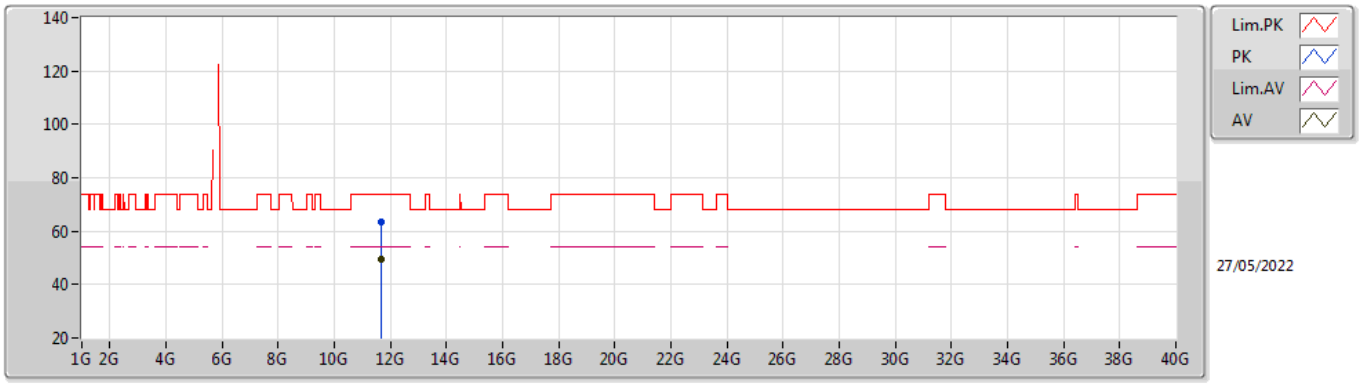


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65216G	63.42	74.00	-10.58	48.84	3	Horizontal	141	2.03	-	39.40	10.75	35.57
AV	11.65162G	49.44	54.00	-4.56	34.86	3	Horizontal	141	2.03	-	39.40	10.75	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

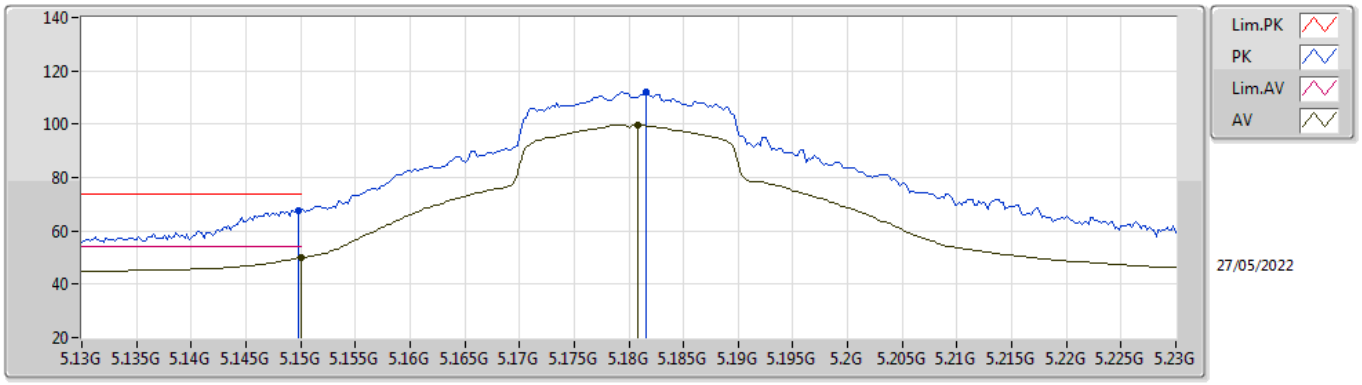


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1498G	67.69	74.00	-6.31	61.86	3	Vertical	138	1.99	-	34.00	7.17	35.34
AV	5.15G	49.87	54.00	-4.13	44.04	3	Vertical	138	1.99	-	34.00	7.17	35.34
PK	5.1816G	111.91	Inf	-Inf	105.93	3	Vertical	138	1.99	-	34.13	7.19	35.34
AV	5.1808G	99.77	Inf	-Inf	93.80	3	Vertical	138	1.99	-	34.12	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

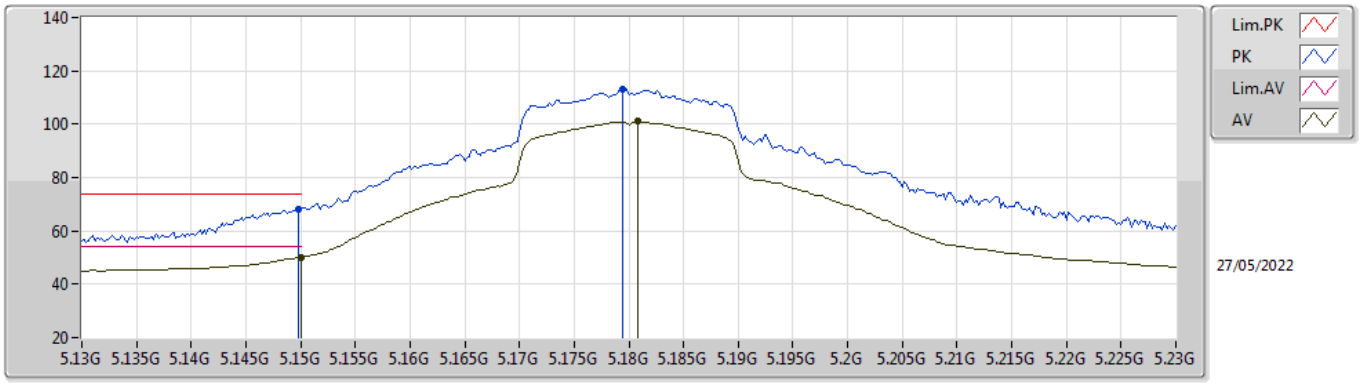


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1498G	68.25	74.00	-5.75	62.42	3	Horizontal	111	2.07	-	34.00	7.17	35.34
AV	5.15G	50.18	54.00	-3.82	44.35	3	Horizontal	111	2.07	-	34.00	7.17	35.34
PK	5.1794G	113.01	Inf	-Inf	107.04	3	Horizontal	111	2.07	-	34.12	7.19	35.34
AV	5.1808G	100.97	Inf	-Inf	95.00	3	Horizontal	111	2.07	-	34.12	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

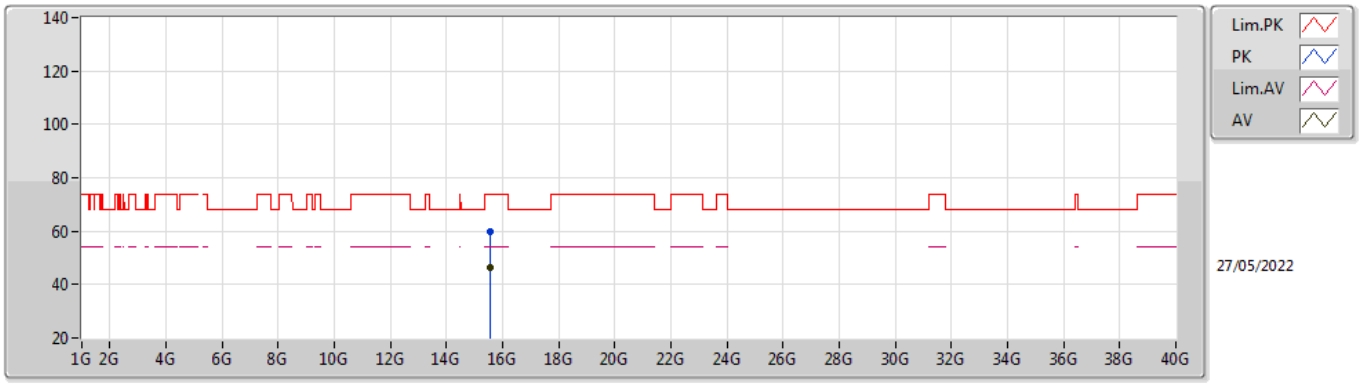


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5388G	59.79	74.00	-14.21	43.59	3	Vertical	151	2.44	-	38.43	13.17	35.40
AV	15.53598G	46.13	54.00	-7.87	29.91	3	Vertical	151	2.44	-	38.45	13.17	35.40

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

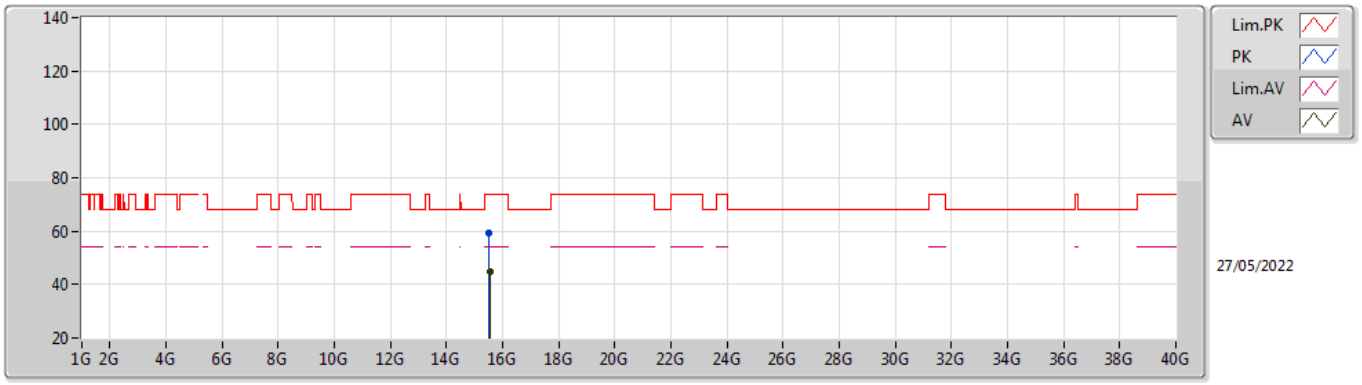


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5301G	59.18	74.00	-14.82	42.92	3	Horizontal	178	1.80	-	38.49	13.17	35.40
AV	15.53874G	44.85	54.00	-9.15	28.65	3	Horizontal	178	1.80	-	38.43	13.17	35.40

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

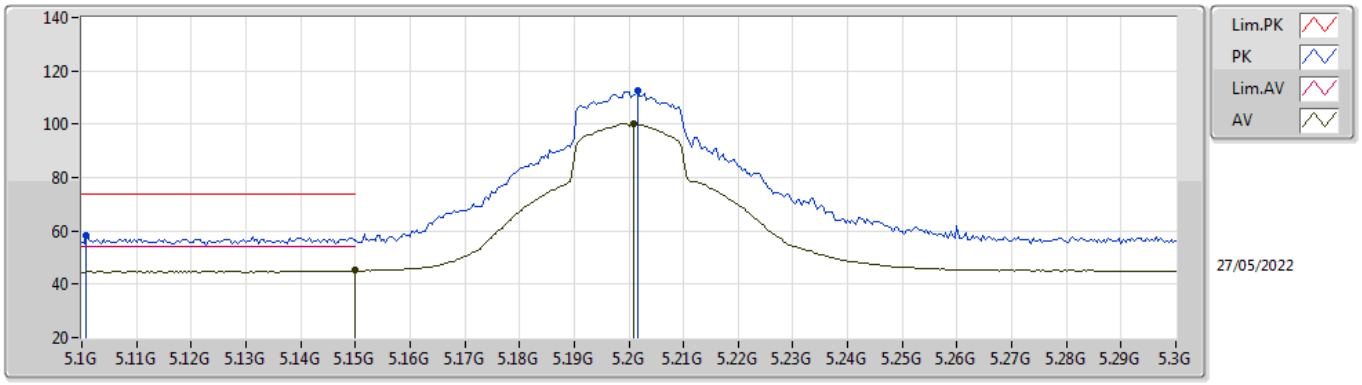


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1008G	58.02	74.00	-15.98	52.30	3	Vertical	138	1.97	-	33.90	7.15	35.33
AV	5.15G	45.09	54.00	-8.91	39.26	3	Vertical	138	1.97	-	34.00	7.17	35.34
PK	5.2016G	112.40	Inf	-Inf	106.33	3	Vertical	138	1.97	-	34.21	7.20	35.34
AV	5.2008G	100.33	Inf	-Inf	94.27	3	Vertical	138	1.97	-	34.20	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

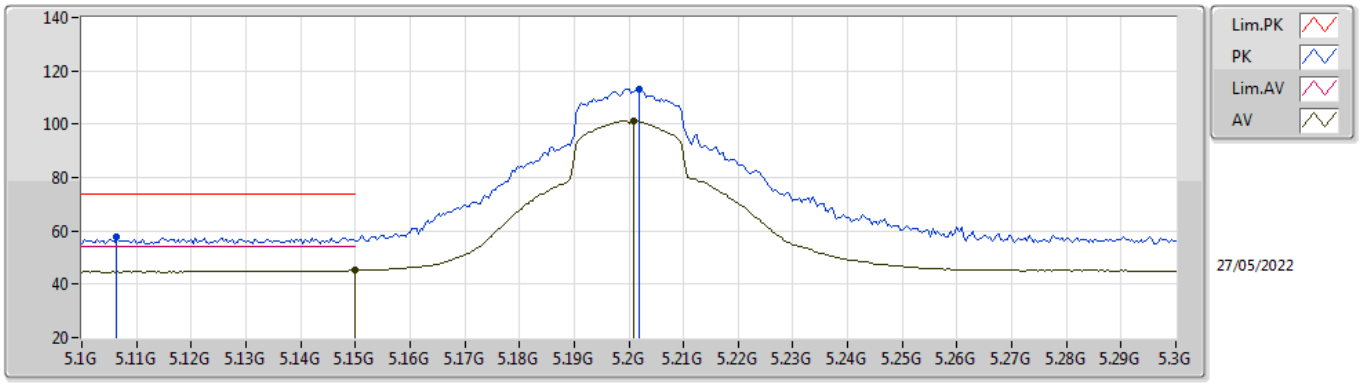


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1064G	57.96	74.00	-16.04	52.23	3	Horizontal	111	1.96	-	33.91	7.15	35.33
AV	5.15G	45.14	54.00	-8.86	39.31	3	Horizontal	111	1.96	-	34.00	7.17	35.34
PK	5.202G	113.28	Inf	-Inf	107.21	3	Horizontal	111	1.96	-	34.21	7.20	35.34
AV	5.2008G	101.39	Inf	-Inf	95.33	3	Horizontal	111	1.96	-	34.20	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

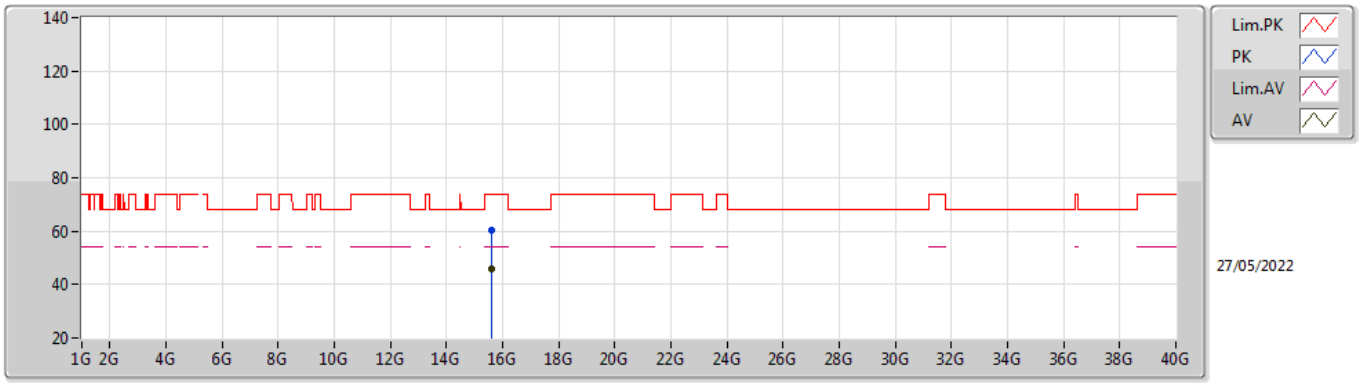


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.59502G	60.46	74.00	-13.54	44.68	3	Vertical	154	2.14	-	38.03	13.20	35.45
AV	15.5997G	46.07	54.00	-7.93	30.32	3	Vertical	154	2.14	-	38.00	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

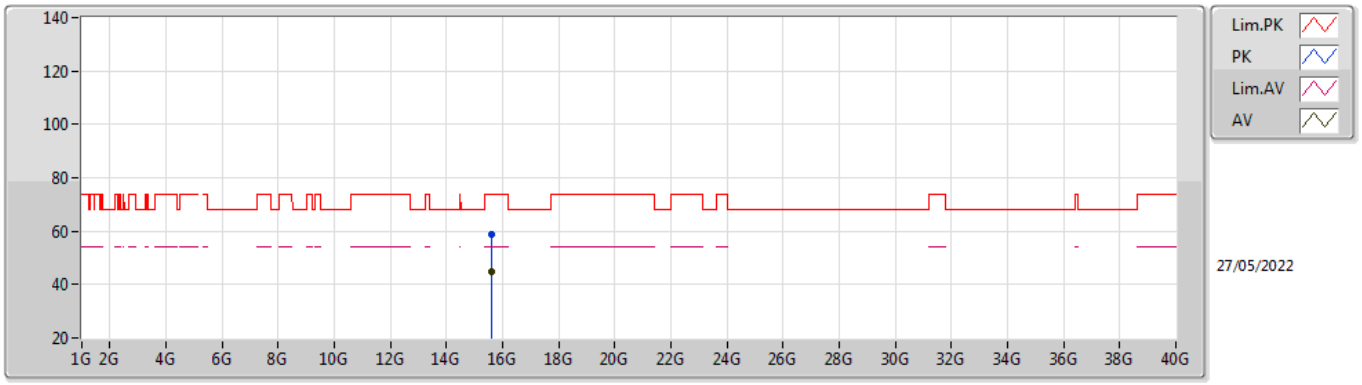


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.59712G	58.63	74.00	-15.37	42.86	3	Horizontal	16	2.07	-	38.02	13.20	35.45
AV	15.59556G	44.57	54.00	-9.43	28.79	3	Horizontal	16	2.07	-	38.03	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

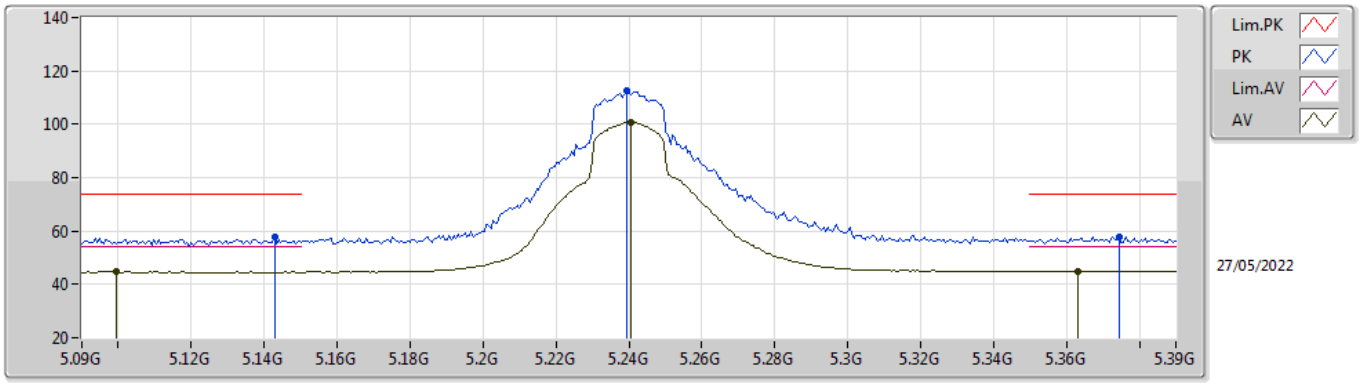


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1428G	57.80	74.00	-16.20	51.98	3	Vertical	138	1.94	-	33.99	7.17	35.34
AV	5.0996G	44.66	54.00	-9.34	38.94	3	Vertical	138	1.94	-	33.90	7.15	35.33
PK	5.2394G	112.44	Inf	-Inf	106.22	3	Vertical	138	1.94	-	34.36	7.20	35.34
AV	5.2406G	100.82	Inf	-Inf	94.60	3	Vertical	138	1.94	-	34.36	7.20	35.34
PK	5.3744G	57.94	74.00	-16.06	51.53	3	Vertical	138	1.94	-	34.55	7.20	35.34
AV	5.363G	45.08	54.00	-8.92	38.69	3	Vertical	138	1.94	-	34.53	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

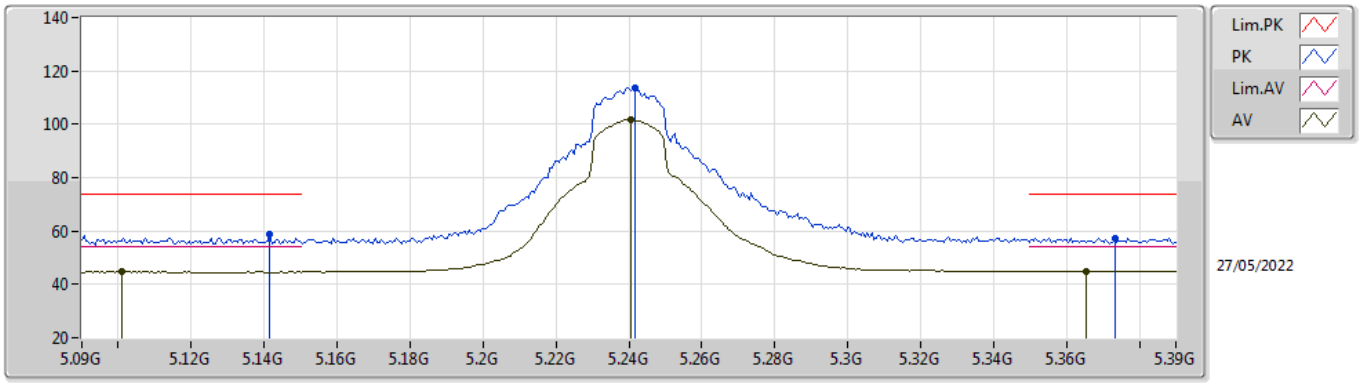


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1416G	58.82	74.00	-15.18	53.01	3	Horizontal	110	1.97	-	33.98	7.17	35.34
AV	5.1008G	44.69	54.00	-9.31	38.97	3	Horizontal	110	1.97	-	33.90	7.15	35.33
PK	5.2418G	113.78	Inf	-Inf	107.55	3	Horizontal	110	1.97	-	34.37	7.20	35.34
AV	5.2406G	101.72	Inf	-Inf	95.50	3	Horizontal	110	1.97	-	34.36	7.20	35.34
PK	5.3732G	57.50	74.00	-16.50	51.09	3	Horizontal	110	1.97	-	34.55	7.20	35.34
AV	5.3654G	45.03	54.00	-8.97	38.64	3	Horizontal	110	1.97	-	34.53	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

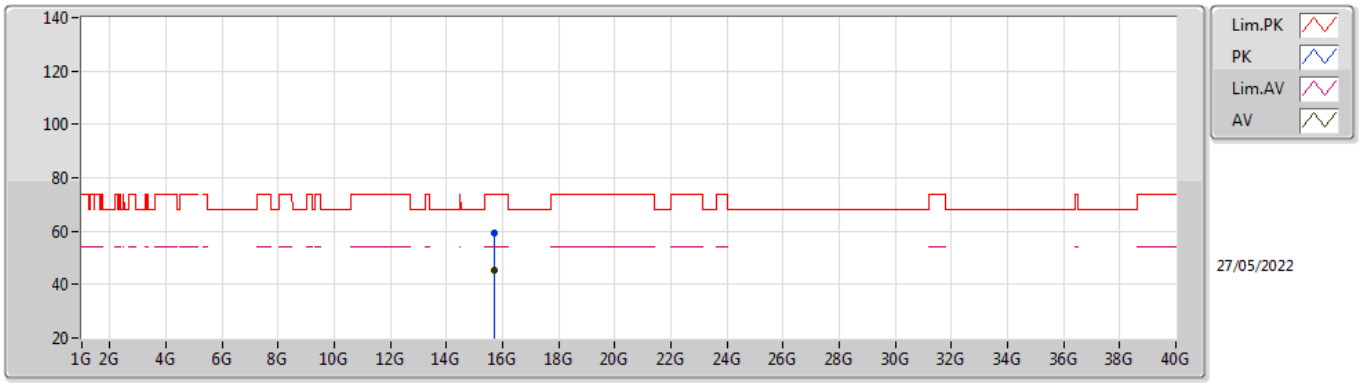


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.71898G	59.06	74.00	-14.94	43.77	3	Vertical	316	2.71	-	37.58	13.26	35.55
AV	15.72204G	45.34	54.00	-8.66	30.05	3	Vertical	316	2.71	-	37.59	13.26	35.56

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

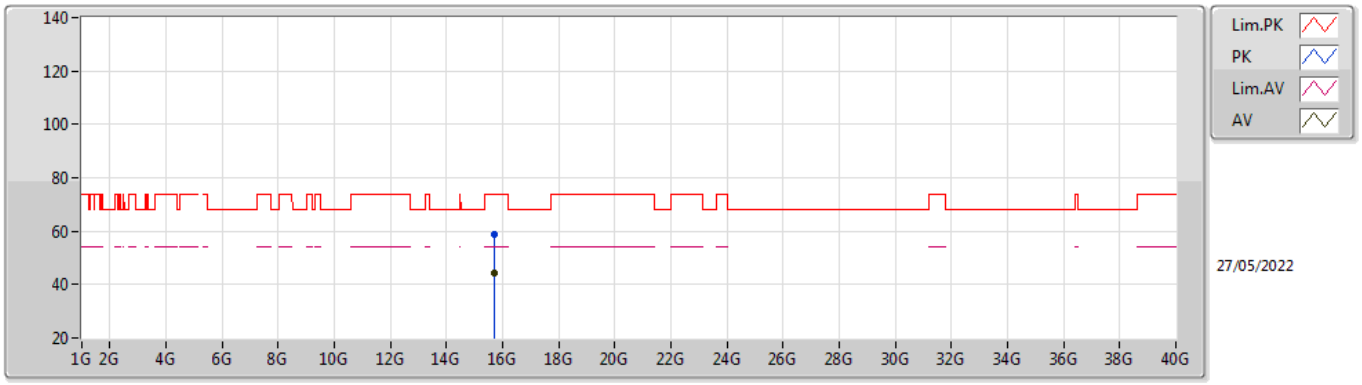


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.71778G	58.71	74.00	-15.29	43.43	3	Horizontal	284	1.80	-	37.57	13.26	35.55
AV	15.72192G	44.54	54.00	-9.46	29.25	3	Horizontal	284	1.80	-	37.59	13.26	35.56

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

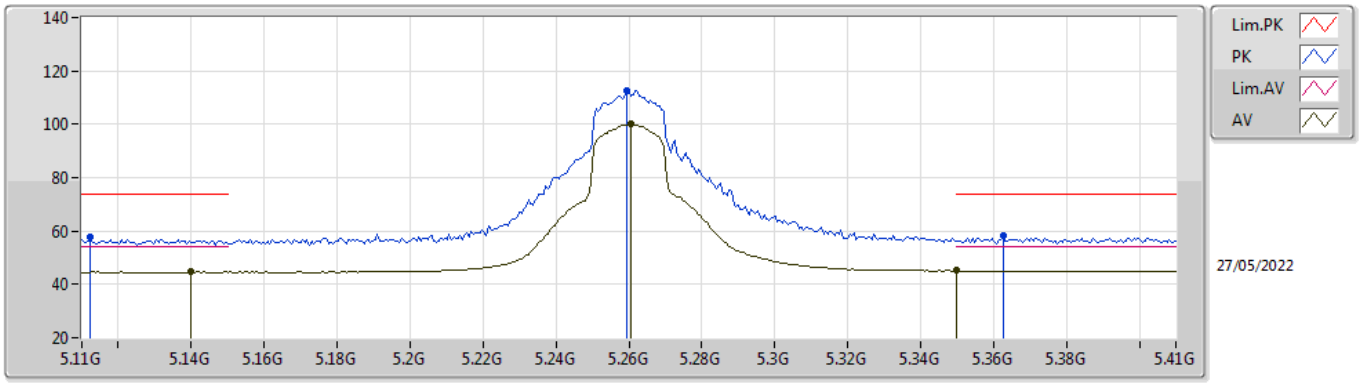


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1124G	57.58	74.00	-16.42	51.83	3	Vertical	138	1.98	-	33.92	7.16	35.33
AV	5.14G	44.61	54.00	-9.39	38.80	3	Vertical	138	1.98	-	33.98	7.17	35.34
PK	5.2594G	112.51	Inf	-Inf	106.23	3	Vertical	138	1.98	-	34.42	7.20	35.34
AV	5.2606G	100.14	Inf	-Inf	93.86	3	Vertical	138	1.98	-	34.42	7.20	35.34
PK	5.3626G	58.17	74.00	-15.83	51.78	3	Vertical	138	1.98	-	34.53	7.20	35.34
AV	5.35G	45.10	54.00	-8.90	38.74	3	Vertical	138	1.98	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

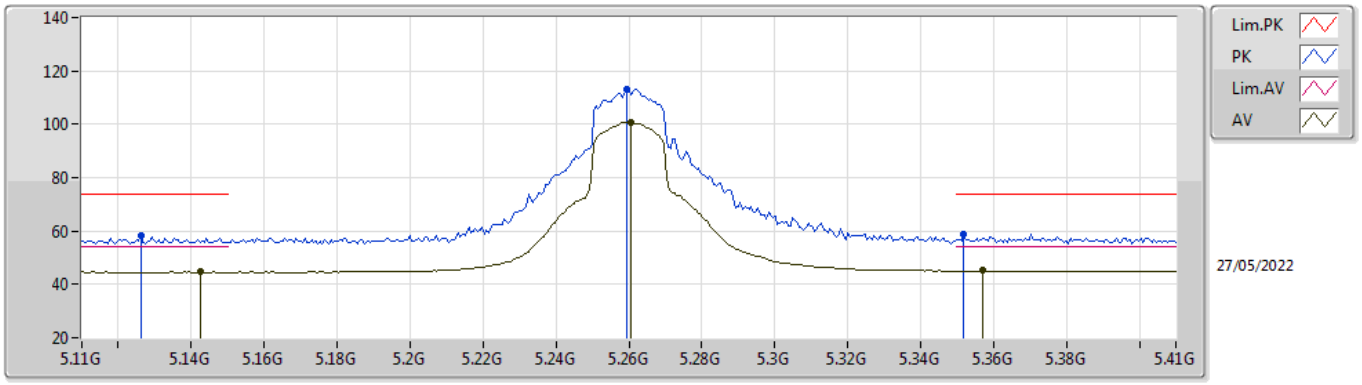


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1262G	58.26	74.00	-15.74	52.49	3	Horizontal	110	2.08	-	33.95	7.16	35.34
AV	5.1424G	44.62	54.00	-9.38	38.81	3	Horizontal	110	2.08	-	33.98	7.17	35.34
PK	5.2594G	113.35	Inf	-Inf	107.07	3	Horizontal	110	2.08	-	34.42	7.20	35.34
AV	5.2606G	100.76	Inf	-Inf	94.48	3	Horizontal	110	2.08	-	34.42	7.20	35.34
PK	5.3518G	58.57	74.00	-15.43	52.21	3	Horizontal	110	2.08	-	34.50	7.20	35.34
AV	5.3572G	45.13	54.00	-8.87	38.76	3	Horizontal	110	2.08	-	34.51	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

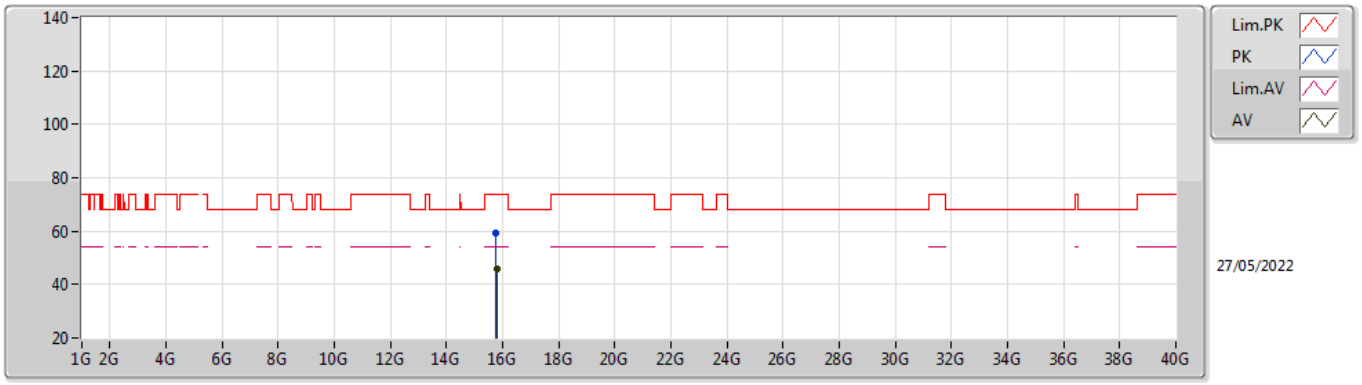


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.77844G	59.25	74.00	-14.75	43.75	3	Vertical	179	1.93	-	37.81	13.29	35.60
AV	15.77952G	45.82	54.00	-8.18	30.31	3	Vertical	179	1.93	-	37.82	13.29	35.60

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

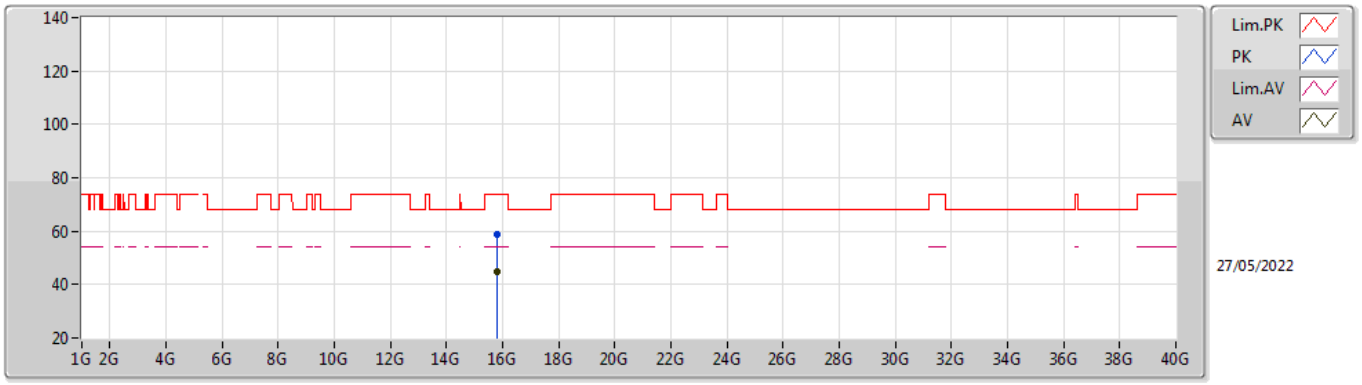


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.77928G	58.83	74.00	-15.17	43.32	3	Horizontal	32	2.28	-	37.82	13.29	35.60
AV	15.78126G	44.87	54.00	-9.13	29.36	3	Horizontal	32	2.28	-	37.83	13.29	35.61

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

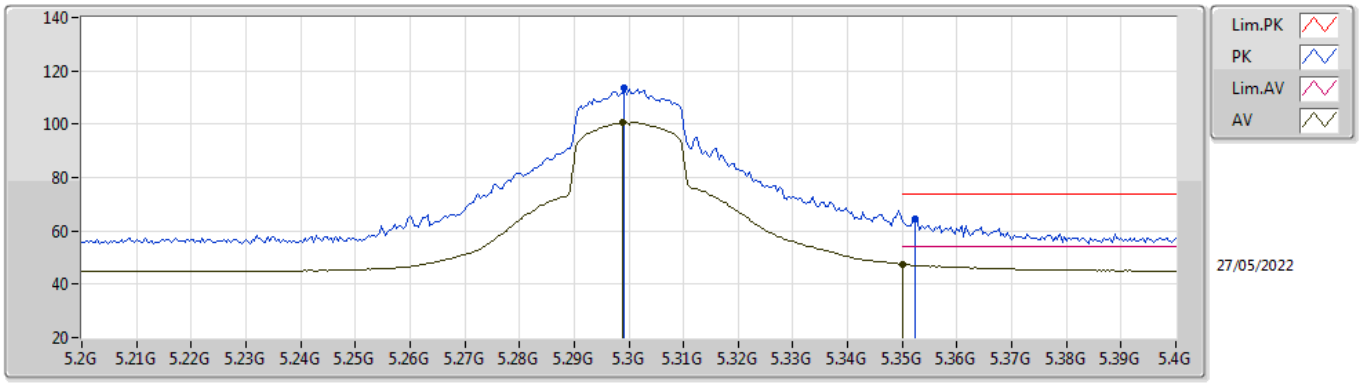


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2992G	113.43	Inf	-Inf	107.07	3	Vertical	138	1.91	-	34.50	7.20	35.34
AV	5.2988G	100.91	Inf	-Inf	94.55	3	Vertical	138	1.91	-	34.50	7.20	35.34
PK	5.3524G	64.55	74.00	-9.45	58.19	3	Vertical	138	1.91	-	34.50	7.20	35.34
AV	5.35G	47.47	54.00	-6.53	41.11	3	Vertical	138	1.91	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

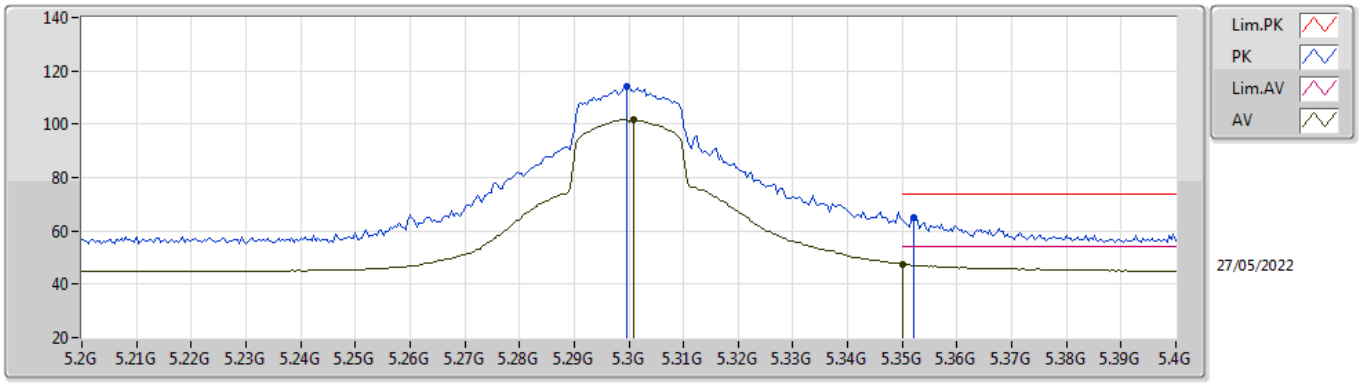


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2996G	114.34	Inf	-Inf	107.98	3	Horizontal	110	1.99	-	34.50	7.20	35.34
AV	5.3008G	101.71	Inf	-Inf	95.35	3	Horizontal	110	1.99	-	34.50	7.20	35.34
PK	5.352G	64.93	74.00	-9.07	58.57	3	Horizontal	110	1.99	-	34.50	7.20	35.34
AV	5.35G	47.53	54.00	-6.47	41.17	3	Horizontal	110	1.99	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

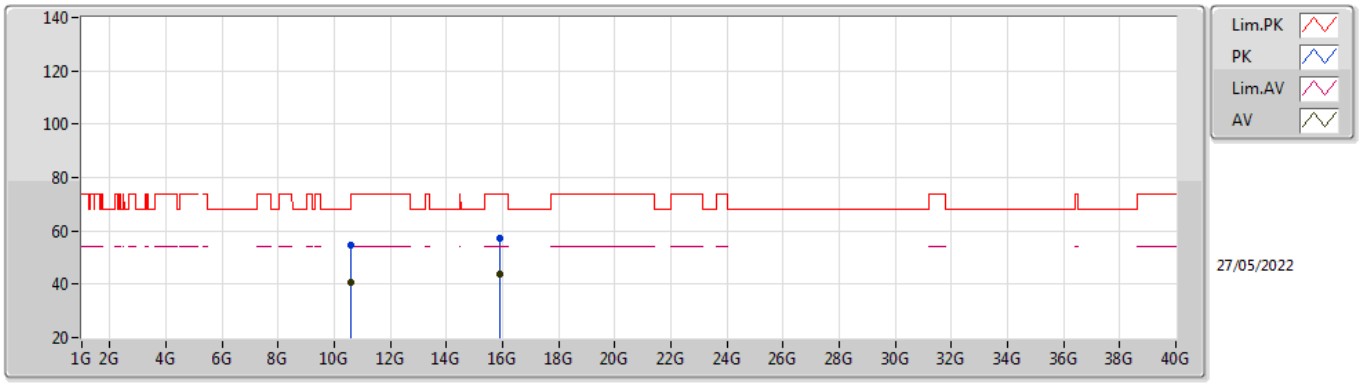


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60111G	54.68	74.00	-19.32	41.27	3	Vertical	80	1.59	-	38.20	10.59	35.38
AV	10.60156G	40.79	54.00	-13.21	27.38	3	Vertical	80	1.59	-	38.20	10.59	35.38
PK	15.91488G	57.26	74.00	-16.74	42.05	3	Vertical	258	1.47	-	37.57	13.36	35.72
AV	15.8853G	43.77	54.00	-10.23	28.48	3	Vertical	258	1.47	-	37.64	13.34	35.69

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

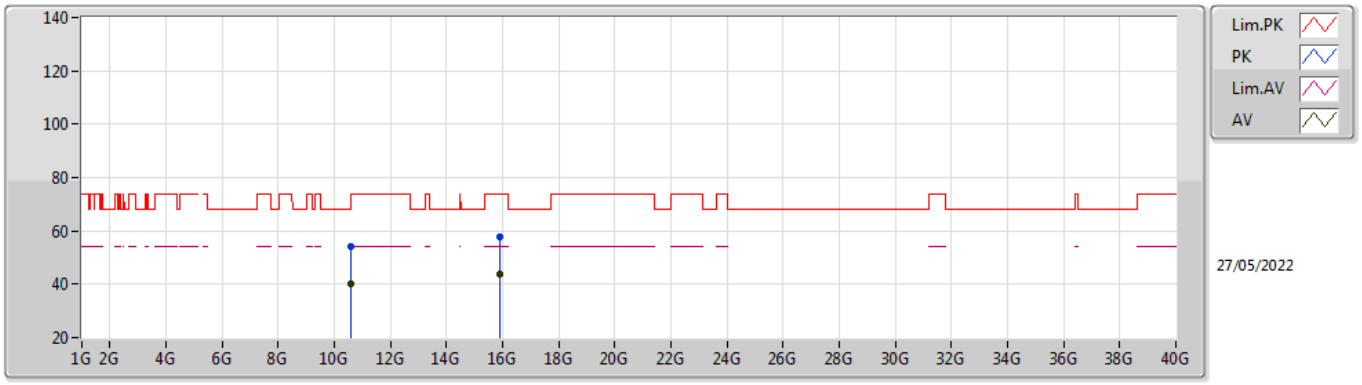


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60204G	54.39	74.00	-19.61	40.98	3	Horizontal	137	1.80	-	38.20	10.59	35.38
AV	10.60192G	40.10	54.00	-13.90	26.69	3	Horizontal	137	1.80	-	38.20	10.59	35.38
PK	15.9063G	57.57	74.00	-16.43	42.34	3	Horizontal	271	3.00	-	37.59	13.35	35.71
AV	15.9006G	43.99	54.00	-10.01	28.75	3	Horizontal	271	3.00	-	37.60	13.35	35.71

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

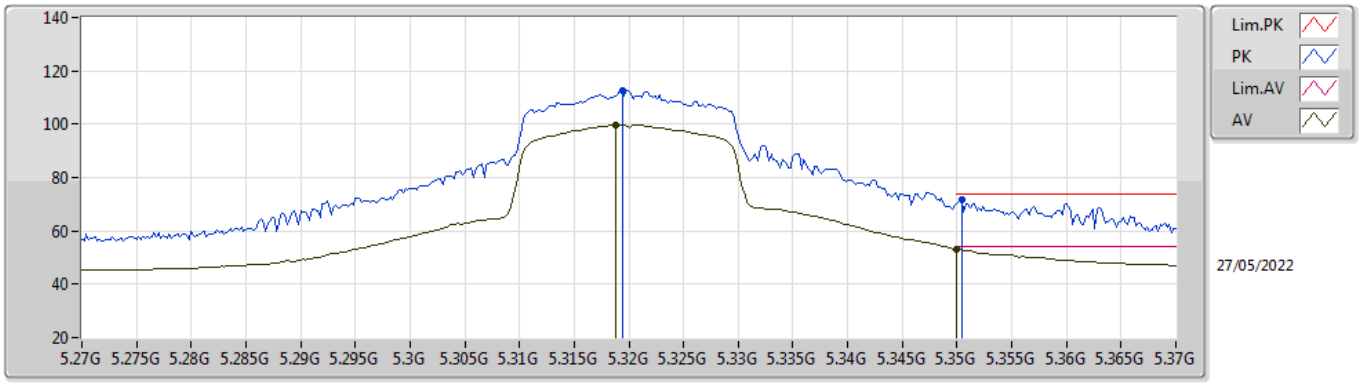


EUT Z_1TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3194G	112.69	Inf	-Inf	106.33	3	Vertical	137	1.88	-	34.50	7.20	35.34
AV	5.3188G	99.78	Inf	-Inf	93.42	3	Vertical	137	1.88	-	34.50	7.20	35.34
PK	5.3504G	71.51	74.00	-2.49	65.15	3	Vertical	137	1.88	-	34.50	7.20	35.34
AV	5.35G	53.17	54.00	-0.83	46.81	3	Vertical	137	1.88	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

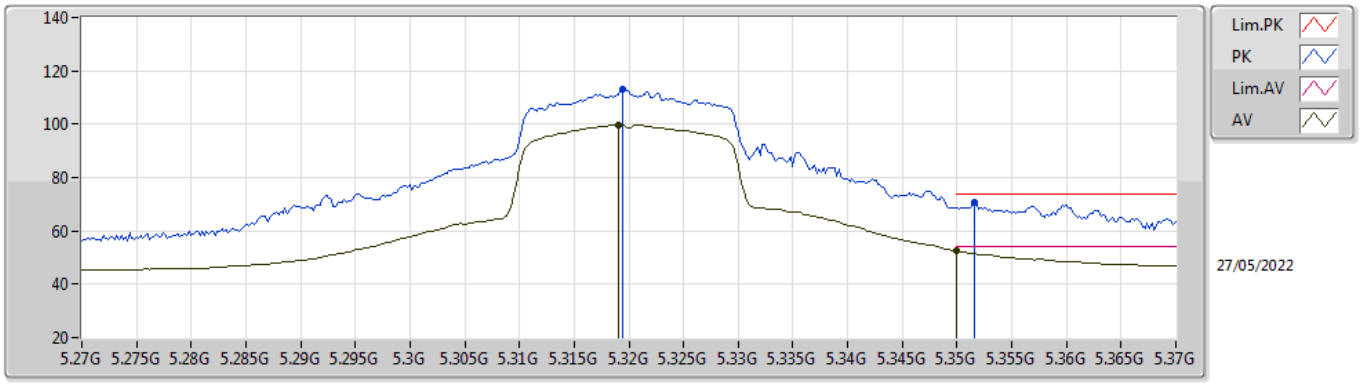


EUT Z_1TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3194G	112.88	Inf	-Inf	106.52	3	Horizontal	113	2.09	-	34.50	7.20	35.34
AV	5.319G	99.78	Inf	-Inf	93.42	3	Horizontal	113	2.09	-	34.50	7.20	35.34
PK	5.3516G	70.93	74.00	-3.07	64.57	3	Horizontal	113	2.09	-	34.50	7.20	35.34
AV	5.35G	52.34	54.00	-1.66	45.98	3	Horizontal	113	2.09	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

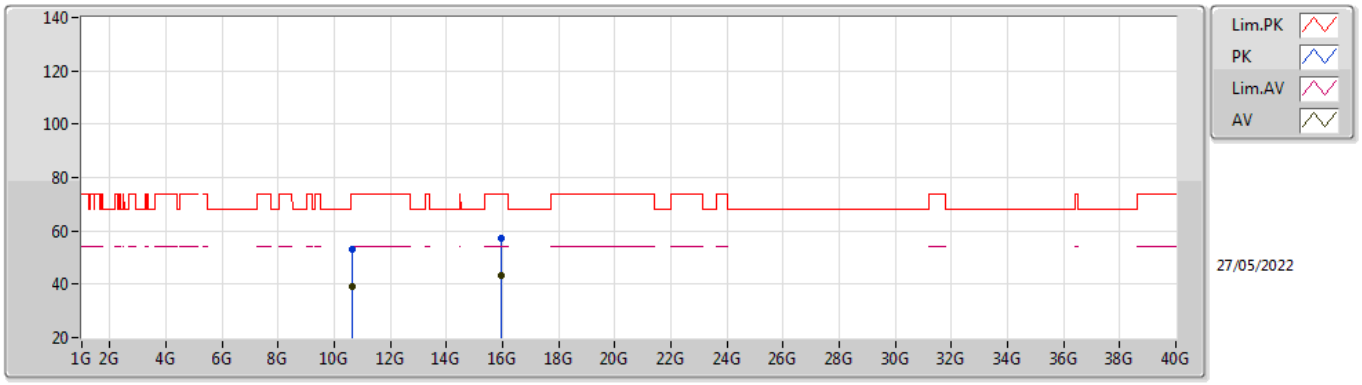


EUT X_1TX
Setting 18
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.63076G	53.21	74.00	-20.79	39.72	3	Vertical	231	1.16	-	38.26	10.59	35.36
AV	10.646G	39.31	54.00	-14.69	25.76	3	Vertical	231	1.16	-	38.29	10.60	35.34
PK	15.94848G	57.42	74.00	-16.58	42.30	3	Vertical	296	2.50	-	37.50	13.37	35.75
AV	15.97206G	43.46	54.00	-10.54	28.38	3	Vertical	296	2.50	-	37.46	13.39	35.77

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

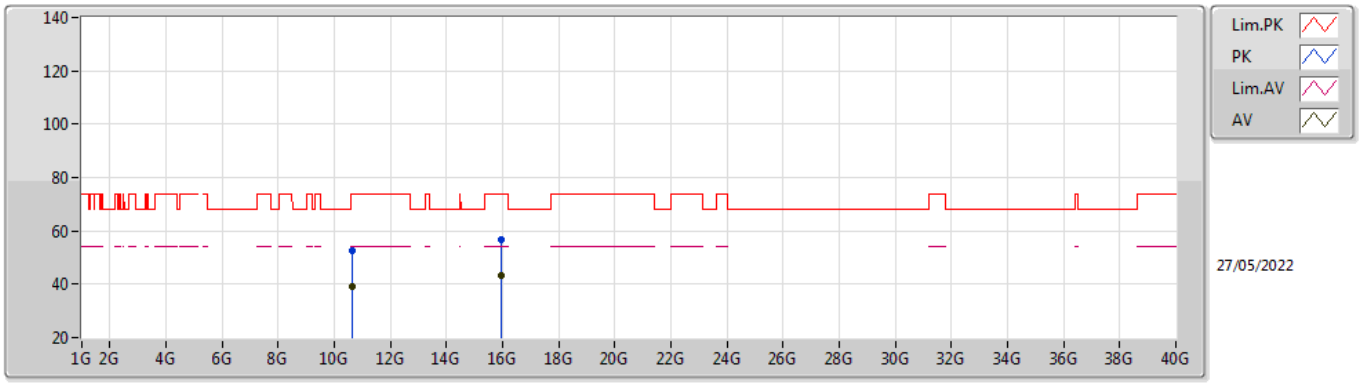


EUT X_1TX
Setting 18
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.64372G	52.67	74.00	-21.33	39.13	3	Horizontal	61	1.11	-	38.29	10.60	35.35
AV	10.65032G	39.34	54.00	-14.66	25.78	3	Horizontal	61	1.11	-	38.30	10.60	35.34
PK	15.95508G	56.88	74.00	-17.12	41.76	3	Horizontal	200	2.54	-	37.49	13.38	35.75
AV	15.9669G	43.46	54.00	-10.54	28.37	3	Horizontal	200	2.54	-	37.47	13.38	35.76

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

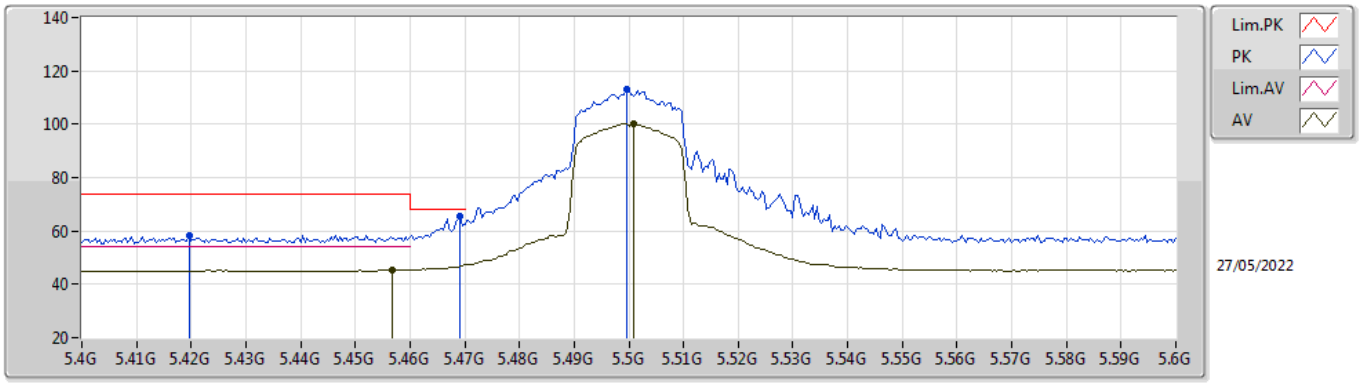


EUT Z_1TX
Setting 17.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4196G	58.23	74.00	-15.77	51.80	3	Vertical	39	2.02	-	34.56	7.22	35.35
PK	5.4692G	65.35	68.20	-2.85	58.89	3	Vertical	39	2.02	-	34.54	7.27	35.35
AV	5.4568G	45.26	54.00	-8.74	38.84	3	Vertical	39	2.02	-	34.51	7.26	35.35
PK	5.4996G	112.97	Inf	-Inf	106.42	3	Vertical	39	2.02	-	34.60	7.30	35.35
AV	5.5008G	100.07	Inf	-Inf	93.52	3	Vertical	39	2.02	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

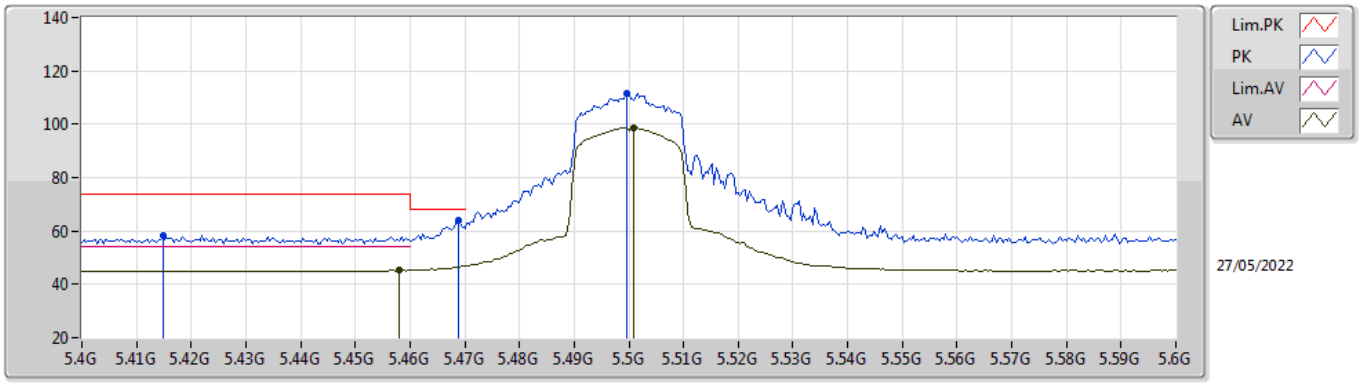


EUT Z_1TX
Setting 17.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4148G	58.21	74.00	-15.79	51.78	3	Horizontal	57	1.94	-	34.57	7.21	35.35
PK	5.4688G	63.92	68.20	-4.28	57.46	3	Horizontal	57	1.94	-	34.54	7.27	35.35
AV	5.458G	45.26	54.00	-8.74	38.83	3	Horizontal	57	1.94	-	34.52	7.26	35.35
PK	5.4996G	111.60	Inf	-Inf	105.05	3	Horizontal	57	1.94	-	34.60	7.30	35.35
AV	5.5008G	98.73	Inf	-Inf	92.18	3	Horizontal	57	1.94	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

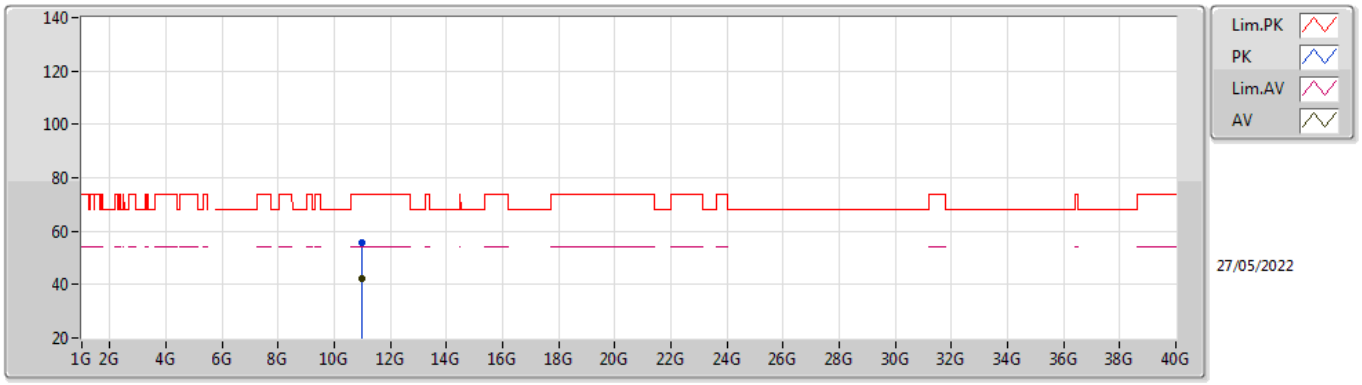


EUT X_1TX
Setting 17.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.00276G	55.46	74.00	-18.54	41.45	3	Vertical	211	2.60	-	38.40	10.65	35.04
AV	10.99964G	42.16	54.00	-11.84	28.15	3	Vertical	211	2.60	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

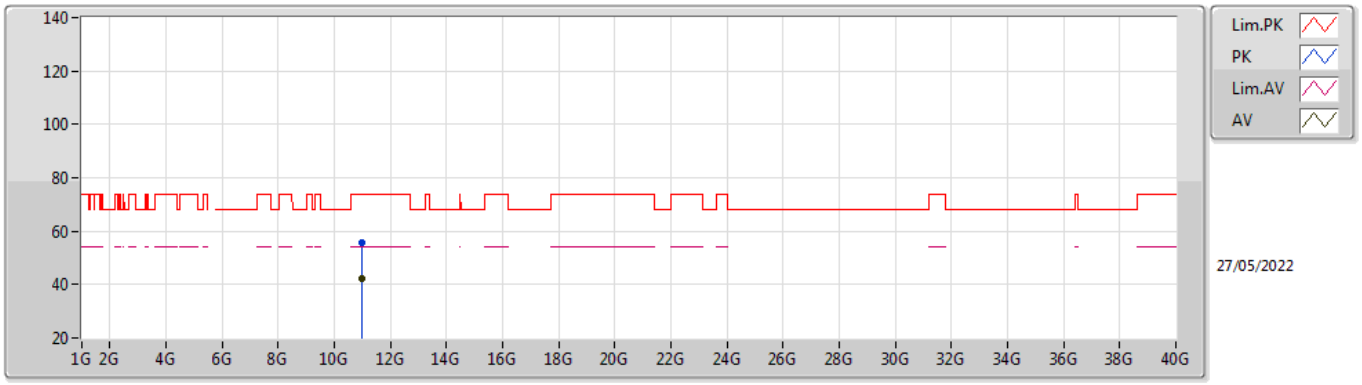


EUT X_1TX
Setting 17.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.99988G	55.73	74.00	-18.27	41.72	3	Horizontal	15	1.35	-	38.40	10.65	35.04
AV	10.9976G	42.23	54.00	-11.77	28.22	3	Horizontal	15	1.35	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

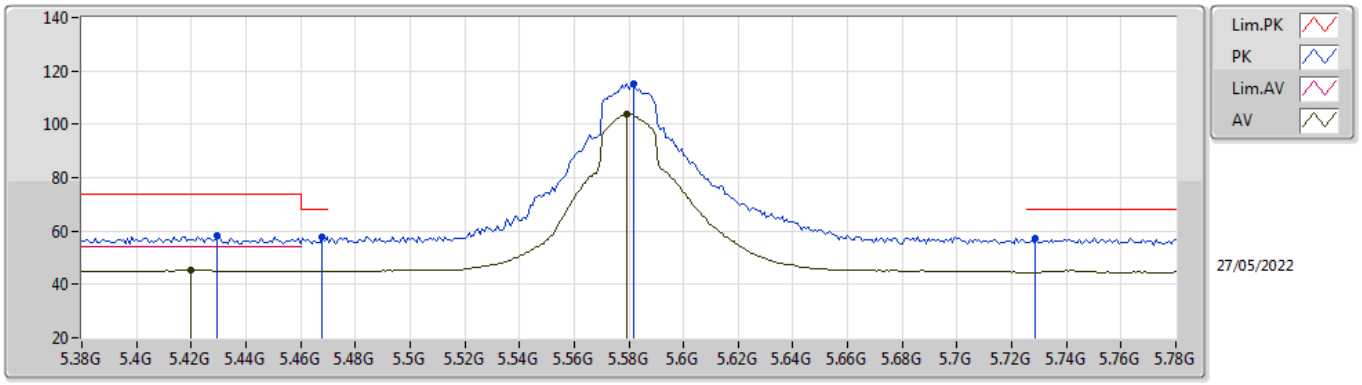


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4296G	58.37	74.00	-15.63	51.95	3	Vertical	40	2.06	-	34.54	7.23	35.35
AV	5.42G	45.45	54.00	-8.55	39.02	3	Vertical	40	2.06	-	34.56	7.22	35.35
PK	5.468G	57.63	68.20	-10.57	51.17	3	Vertical	40	2.06	-	34.54	7.27	35.35
PK	5.5816G	115.39	Inf	-Inf	108.80	3	Vertical	40	2.06	-	34.60	7.38	35.39
AV	5.5792G	103.65	Inf	-Inf	97.06	3	Vertical	40	2.06	-	34.60	7.38	35.39
PK	5.7288G	57.42	68.20	-10.78	51.24	3	Vertical	40	2.06	-	34.24	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

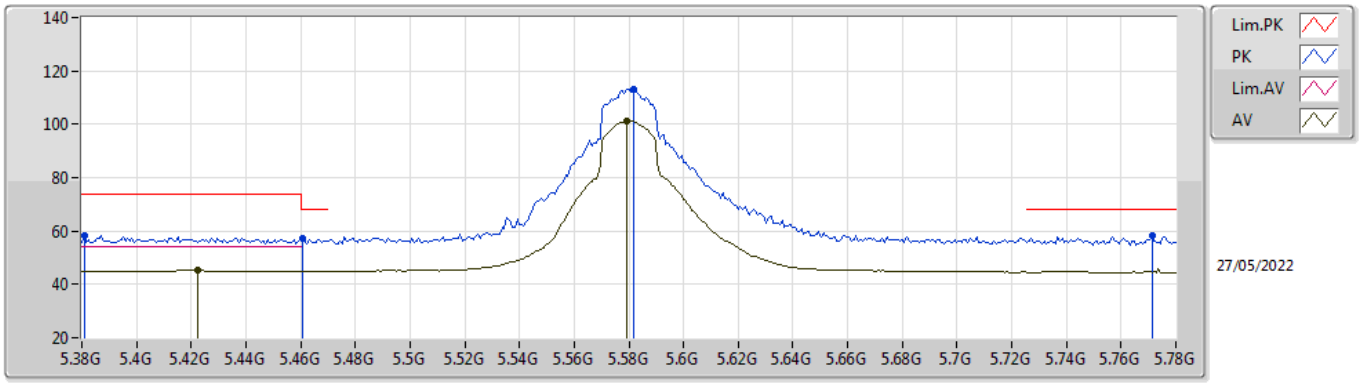


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3808G	58.26	74.00	-15.74	51.85	3	Horizontal	56	1.88	-	34.56	7.20	35.35
PK	5.4608G	57.11	68.20	-11.09	50.68	3	Horizontal	56	1.88	-	34.52	7.26	35.35
AV	5.4224G	45.43	54.00	-8.57	39.00	3	Horizontal	56	1.88	-	34.56	7.22	35.35
PK	5.5816G	113.23	Inf	-Inf	106.64	3	Horizontal	56	1.88	-	34.60	7.38	35.39
AV	5.5792G	101.46	Inf	-Inf	94.87	3	Horizontal	56	1.88	-	34.60	7.38	35.39
PK	5.7712G	58.40	68.20	-9.80	52.29	3	Horizontal	56	1.88	-	34.20	7.40	35.49

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

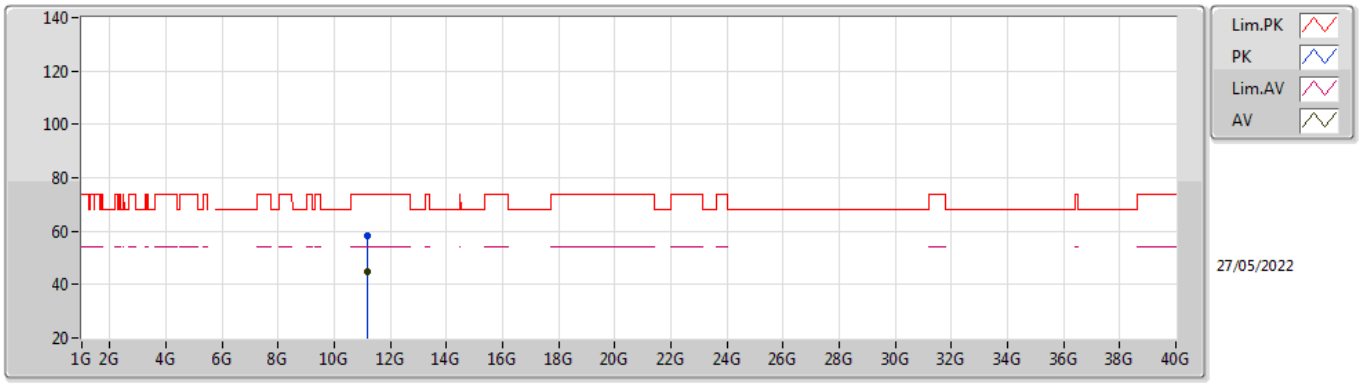


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1618G	58.28	74.00	-15.72	44.27	3	Vertical	149	2.96	-	38.56	10.67	35.22
AV	11.1573G	44.64	54.00	-9.36	30.63	3	Vertical	149	2.96	-	38.56	10.67	35.22

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

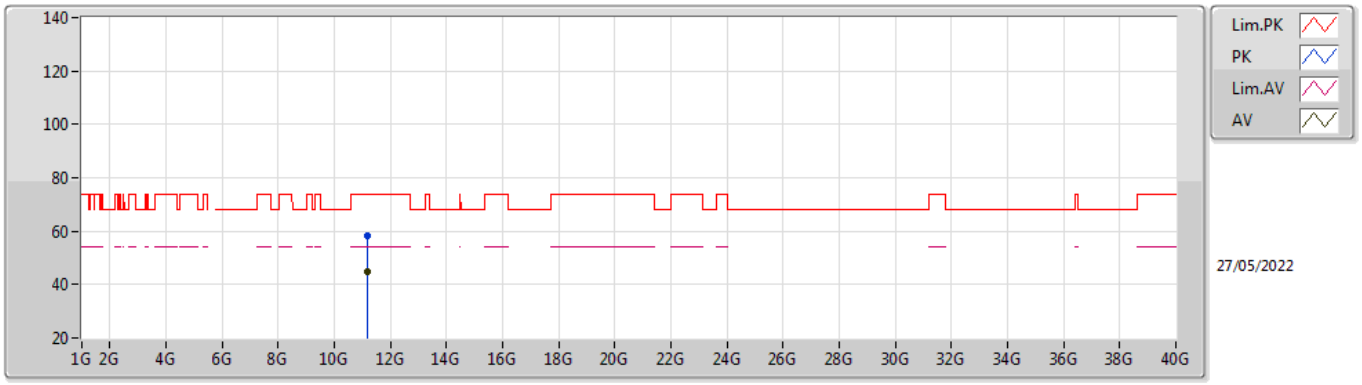


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.16192G	58.50	74.00	-15.50	44.49	3	Horizontal	142	1.80	-	38.56	10.67	35.22
AV	11.15742G	44.96	54.00	-9.04	30.95	3	Horizontal	142	1.80	-	38.56	10.67	35.22

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

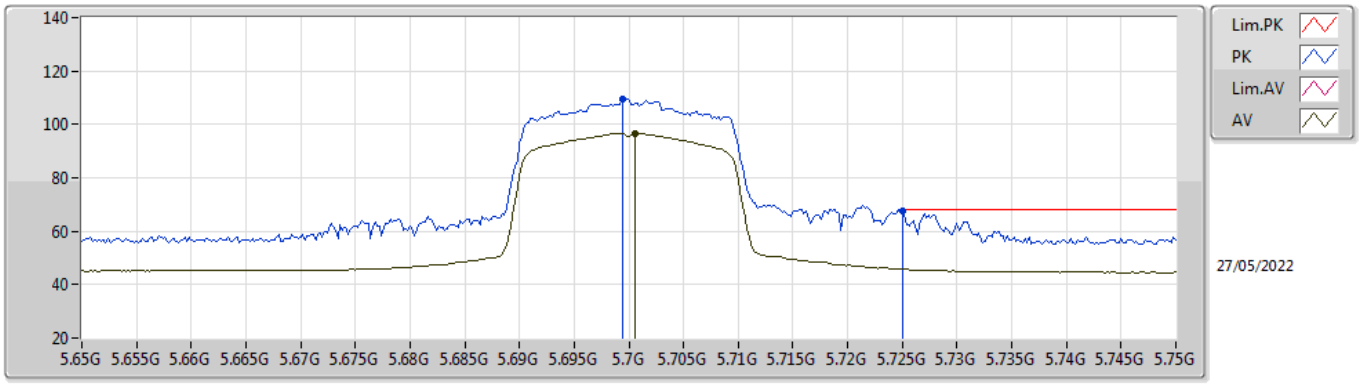


EUT Z_1TX
Setting 14
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6994G	109.54	Inf	-Inf	103.29	3	Vertical	37	1.90	-	34.30	7.40	35.45
AV	5.7006G	96.68	Inf	-Inf	90.43	3	Vertical	37	1.90	-	34.30	7.40	35.45
PK	5.725G	67.37	68.20	-0.83	61.18	3	Vertical	37	1.90	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

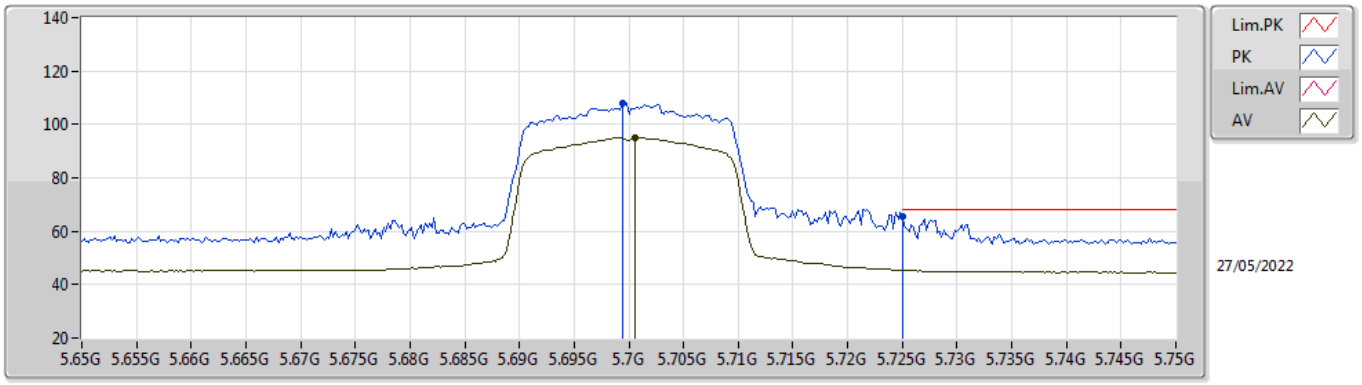


EUT Z_1TX
Setting 14
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6994G	107.92	Inf	-Inf	101.67	3	Horizontal	53	1.94	-	34.30	7.40	35.45
AV	5.7006G	95.10	Inf	-Inf	88.85	3	Horizontal	53	1.94	-	34.30	7.40	35.45
PK	5.725G	65.72	68.20	-2.48	59.53	3	Horizontal	53	1.94	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

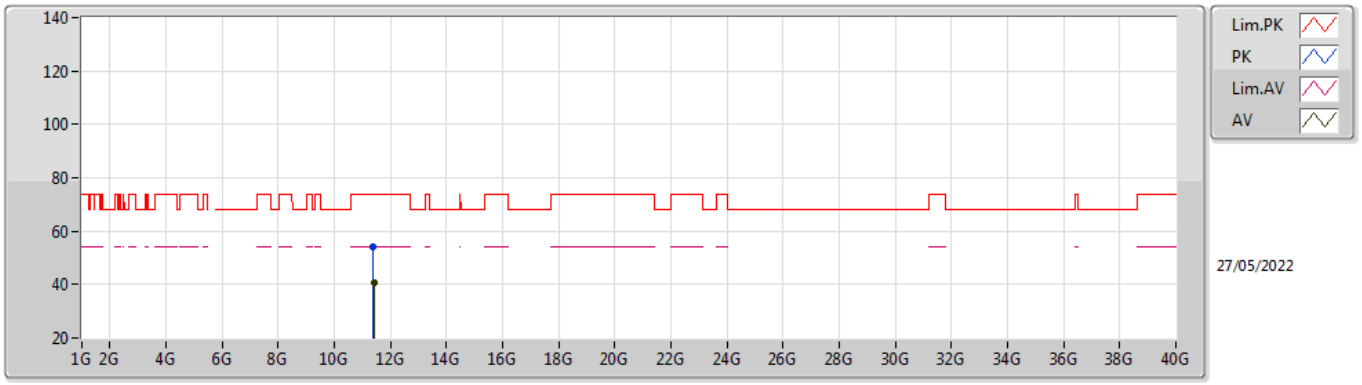


EUT X_1TX
Setting 14
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.39028G	54.37	74.00	-19.63	40.35	3	Vertical	10	2.79	-	38.79	10.71	35.48
AV	11.415G	40.89	54.00	-13.11	26.85	3	Vertical	10	2.79	-	38.83	10.71	35.50

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

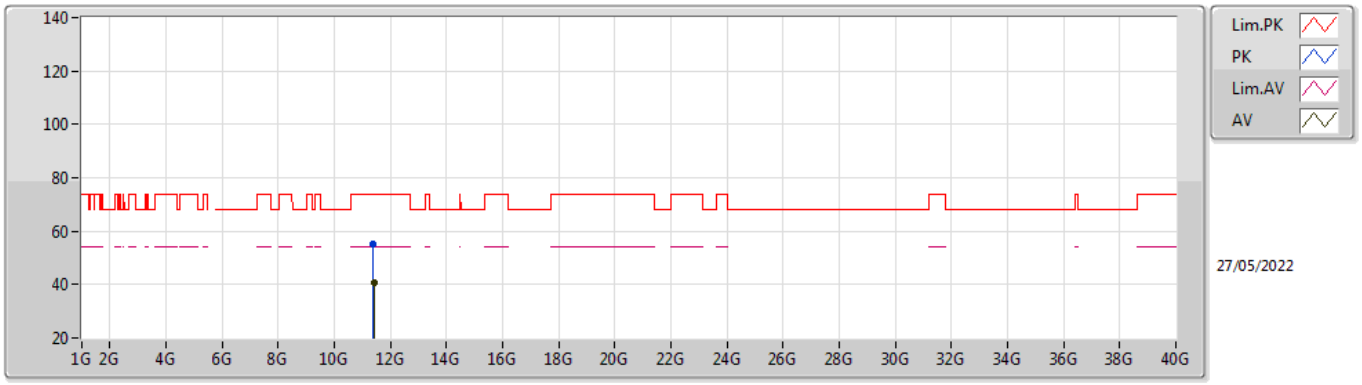


EUT X_1TX
Setting 14
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.3973G	55.00	74.00	-19.00	40.97	3	Horizontal	345	1.81	-	38.80	10.71	35.48
AV	11.41368G	40.90	54.00	-13.10	26.86	3	Horizontal	345	1.81	-	38.83	10.71	35.50

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

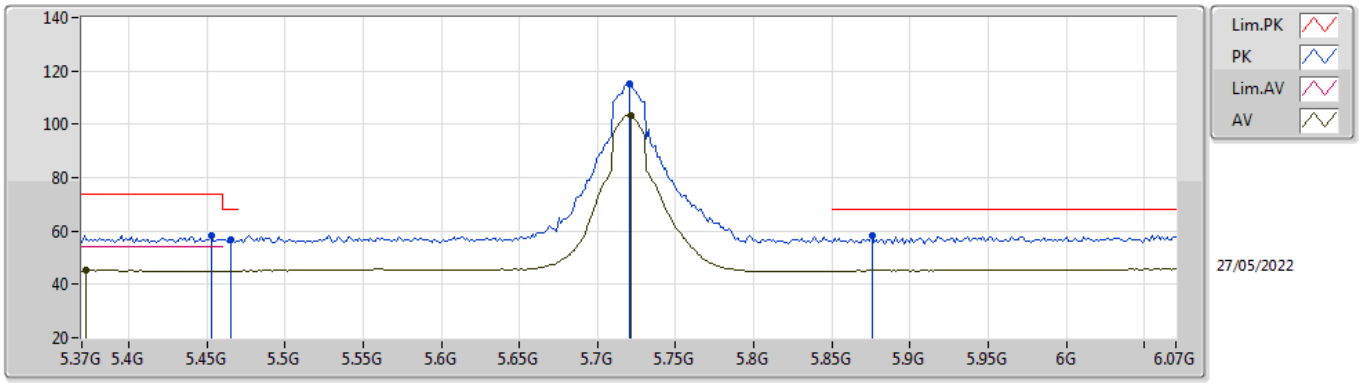


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4526G	58.43	74.00	-15.57	52.02	3	Vertical	37	1.98	-	34.51	7.25	35.35
AV	5.3728G	45.30	54.00	-8.70	38.89	3	Vertical	37	1.98	-	34.55	7.20	35.34
PK	5.4652G	56.63	68.20	-11.57	50.18	3	Vertical	37	1.98	-	34.53	7.27	35.35
PK	5.72G	115.31	Inf	-Inf	109.11	3	Vertical	37	1.98	-	34.26	7.40	35.46
AV	5.7214G	103.49	Inf	-Inf	97.29	3	Vertical	37	1.98	-	34.26	7.40	35.46
PK	5.8754G	58.11	68.20	-10.09	51.72	3	Vertical	37	1.98	-	34.45	7.48	35.54

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

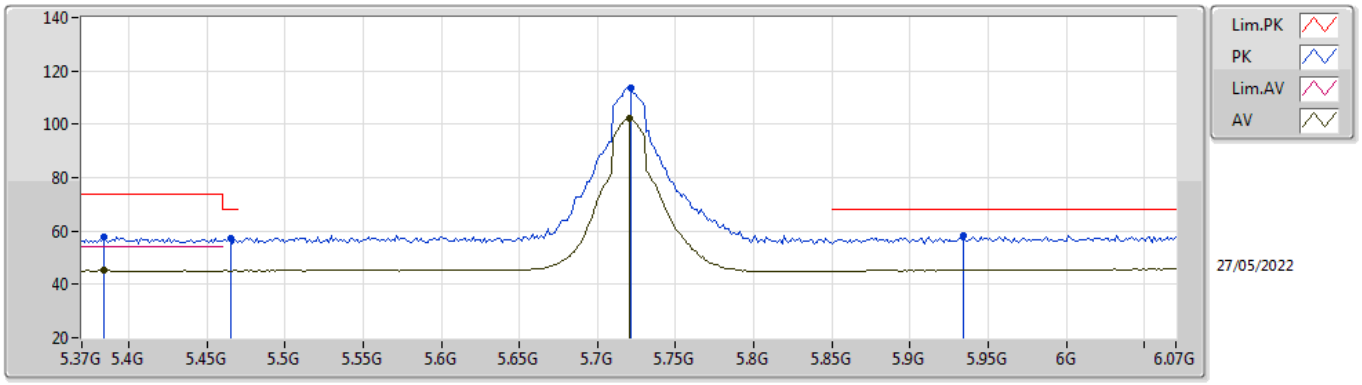


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.384G	57.82	74.00	-16.18	51.40	3	Horizontal	52	1.92	-	34.57	7.20	35.35
AV	5.384G	45.14	54.00	-8.86	38.72	3	Horizontal	52	1.92	-	34.57	7.20	35.35
PK	5.4652G	57.27	68.20	-10.93	50.82	3	Horizontal	52	1.92	-	34.53	7.27	35.35
PK	5.7214G	113.57	Inf	-Inf	107.37	3	Horizontal	52	1.92	-	34.26	7.40	35.46
AV	5.72G	102.03	Inf	-Inf	95.83	3	Horizontal	52	1.92	-	34.26	7.40	35.46
PK	5.9342G	58.19	68.20	-10.01	51.49	3	Horizontal	52	1.92	-	34.74	7.53	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

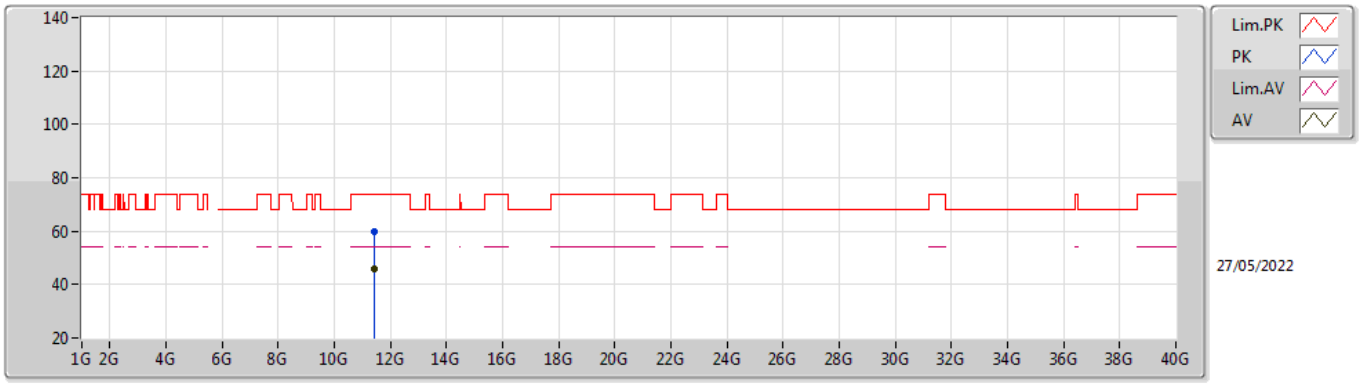


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.43874G	59.69	74.00	-14.31	45.62	3	Vertical	171	2.77	-	38.88	10.72	35.53
AV	11.43742G	45.93	54.00	-8.07	31.87	3	Vertical	171	2.77	-	38.87	10.72	35.53

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

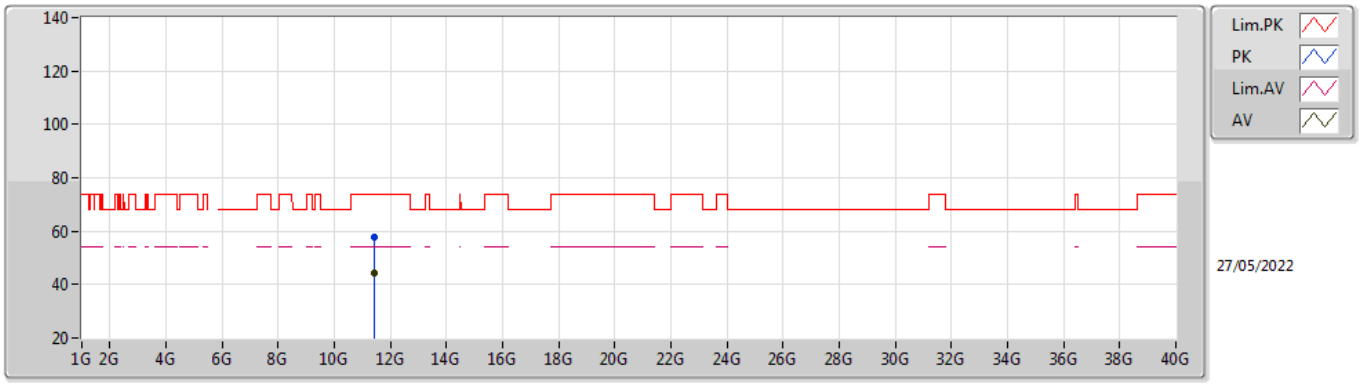


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4472G	57.66	74.00	-16.34	43.59	3	Horizontal	120	1.70	-	38.89	10.72	35.54
AV	11.43766G	44.36	54.00	-9.64	30.29	3	Horizontal	120	1.70	-	38.88	10.72	35.53

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

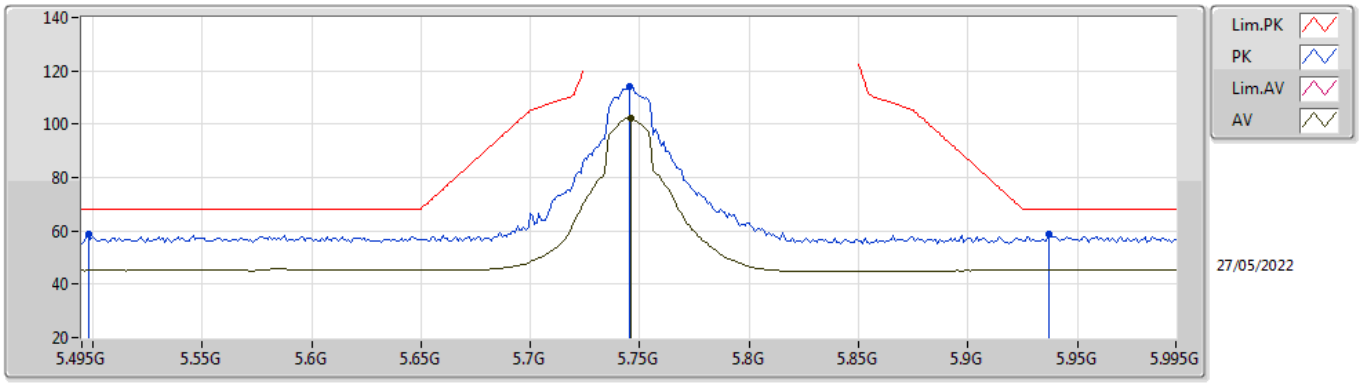


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.498G	58.61	68.20	-9.59	52.06	3	Vertical	40	2.04	-	34.60	7.30	35.35
PK	5.745G	113.91	Inf	-Inf	107.77	3	Vertical	40	2.04	-	34.21	7.40	35.47
AV	5.746G	102.27	Inf	-Inf	96.13	3	Vertical	40	2.04	-	34.21	7.40	35.47
PK	5.937G	58.62	68.20	-9.58	51.90	3	Vertical	40	2.04	-	34.75	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

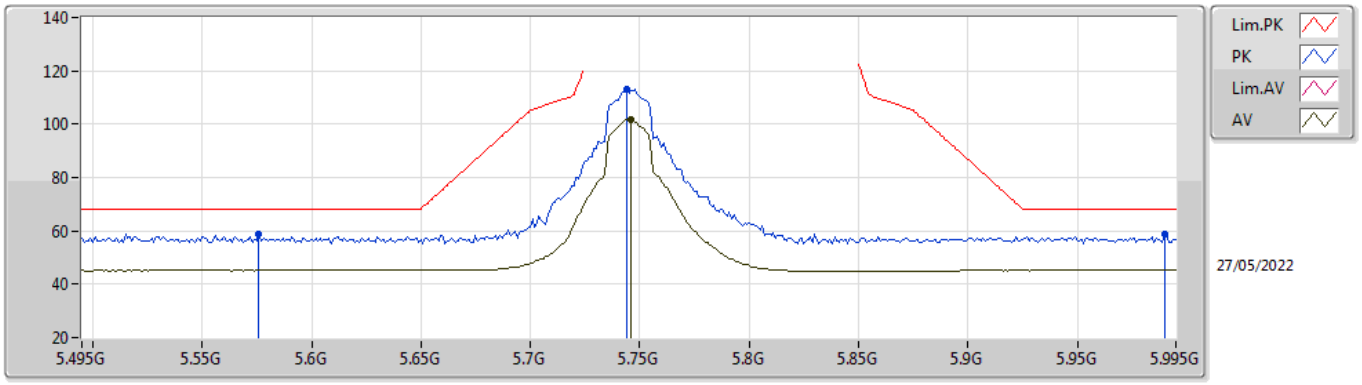


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.576G	58.57	68.20	-9.63	51.98	3	Horizontal	51	1.80	-	34.60	7.38	35.39
PK	5.744G	112.99	Inf	-Inf	106.85	3	Horizontal	51	1.80	-	34.21	7.40	35.47
AV	5.746G	101.58	Inf	-Inf	95.44	3	Horizontal	51	1.80	-	34.21	7.40	35.47
PK	5.99G	58.57	68.20	-9.63	51.77	3	Horizontal	51	1.80	-	34.80	7.59	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

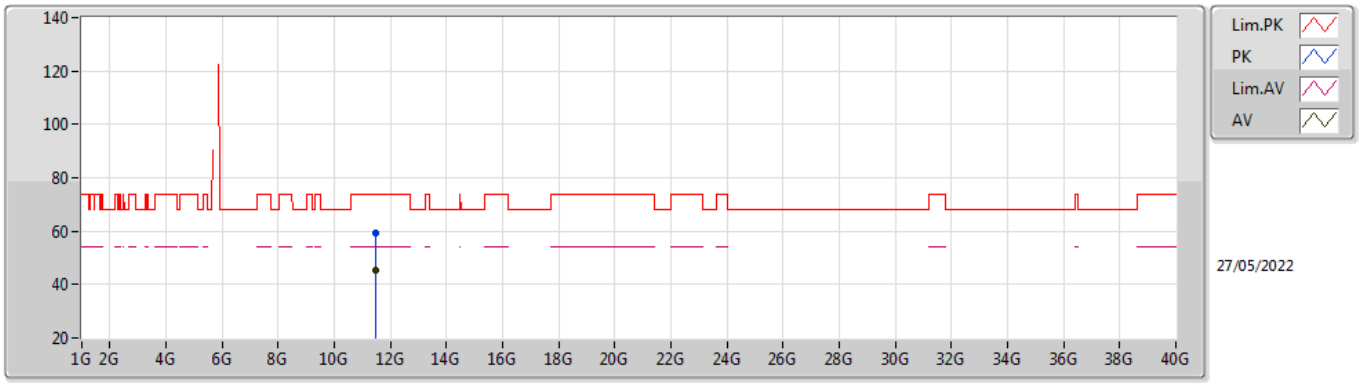


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.49342G	59.10	74.00	-14.90	44.98	3	Vertical	237	2.71	-	38.99	10.72	35.59
AV	11.48862G	45.37	54.00	-8.63	31.26	3	Vertical	237	2.71	-	38.98	10.72	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

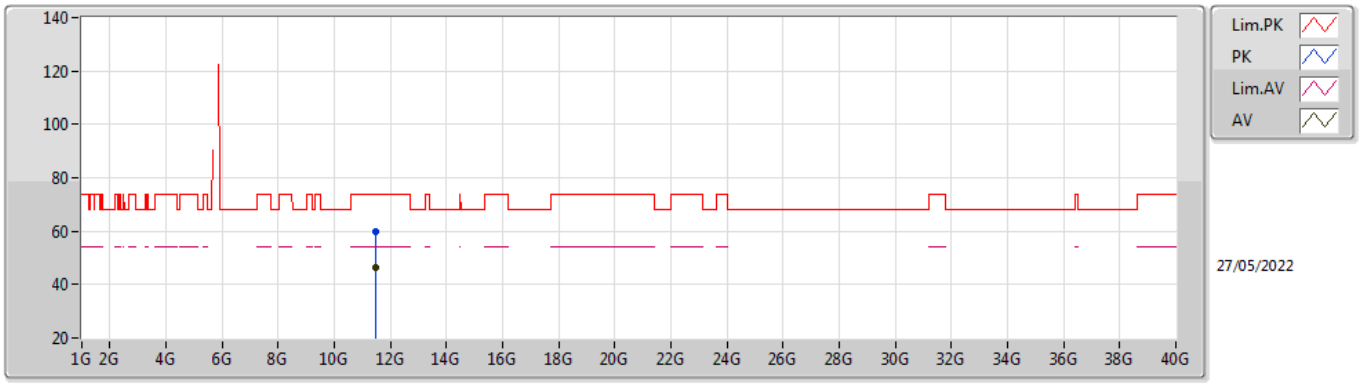


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.48778G	59.76	74.00	-14.24	45.65	3	Horizontal	137	2.07	-	38.98	10.72	35.59
AV	11.48736G	46.34	54.00	-7.66	32.24	3	Horizontal	137	2.07	-	38.97	10.72	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

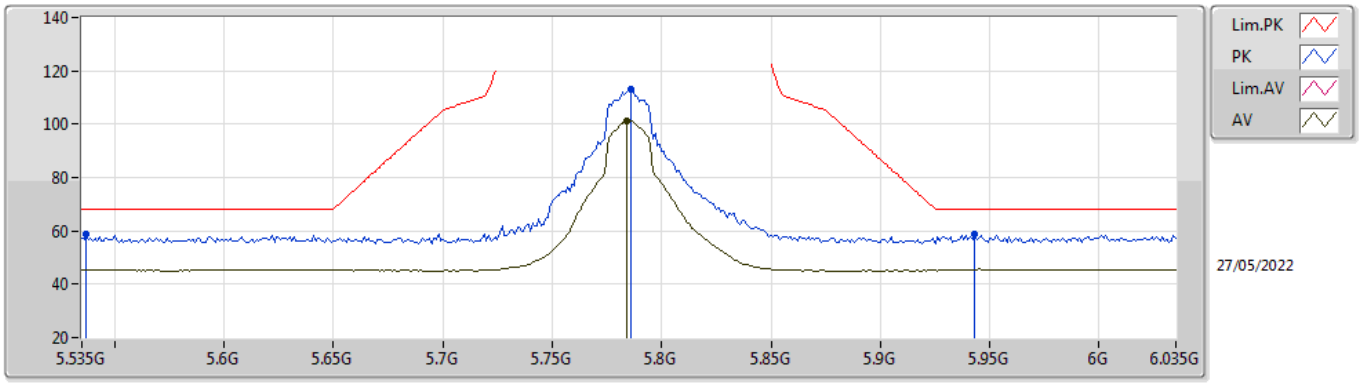


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.537G	58.68	68.20	-9.52	52.11	3	Vertical	191	1.80	-	34.60	7.34	35.37
PK	5.786G	112.88	Inf	-Inf	106.77	3	Vertical	191	1.80	-	34.20	7.40	35.49
AV	5.784G	101.30	Inf	-Inf	95.19	3	Vertical	191	1.80	-	34.20	7.40	35.49
PK	5.943G	58.56	68.20	-9.64	51.82	3	Vertical	191	1.80	-	34.77	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

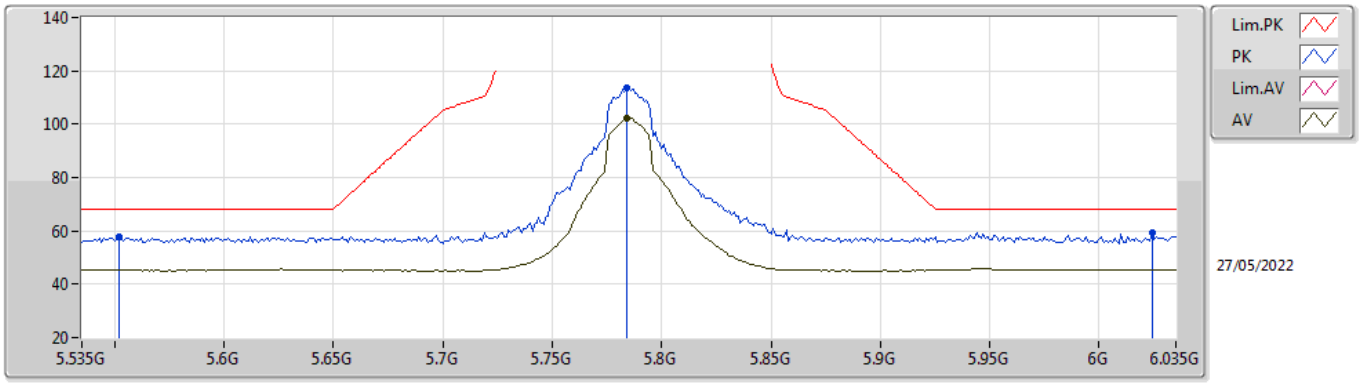


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.552G	57.74	68.20	-10.46	51.17	3	Horizontal	51	1.99	-	34.60	7.35	35.38
PK	5.784G	113.71	Inf	-Inf	107.60	3	Horizontal	51	1.99	-	34.20	7.40	35.49
AV	5.784G	102.16	Inf	-Inf	96.05	3	Horizontal	51	1.99	-	34.20	7.40	35.49
PK	6.024G	59.49	68.20	-8.71	52.62	3	Horizontal	51	1.99	-	34.85	7.61	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

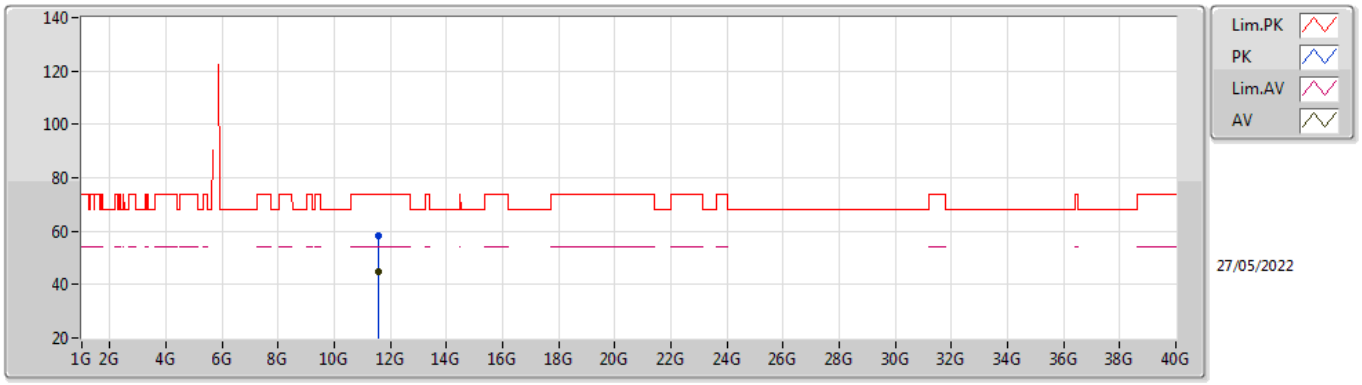


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.57186G	58.20	74.00	-15.80	43.75	3	Vertical	212	2.79	-	39.29	10.74	35.58
AV	11.56742G	44.80	54.00	-9.20	30.38	3	Vertical	212	2.79	-	39.27	10.74	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

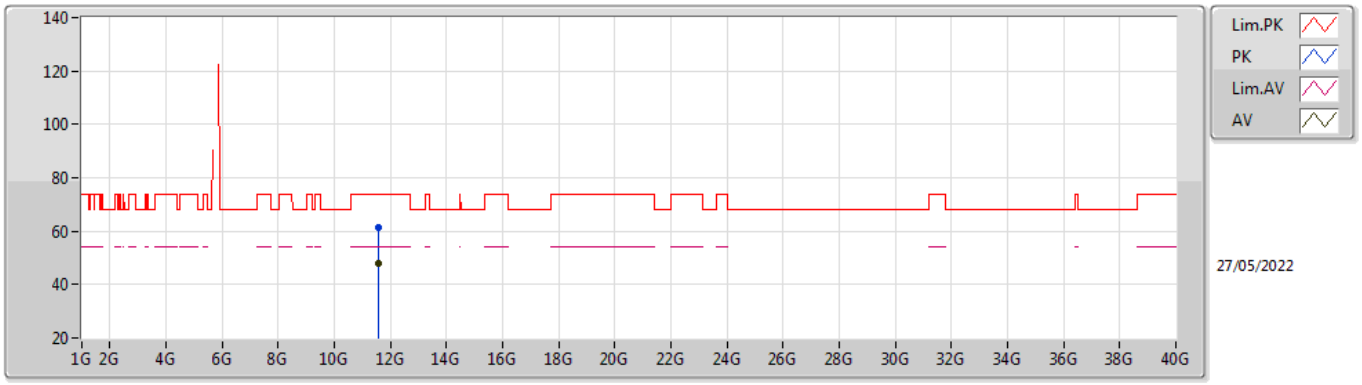


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.57372G	61.25	74.00	-12.75	46.80	3	Horizontal	72	2.63	-	39.29	10.74	35.58
AV	11.56754G	47.86	54.00	-6.14	33.44	3	Horizontal	72	2.63	-	39.27	10.74	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

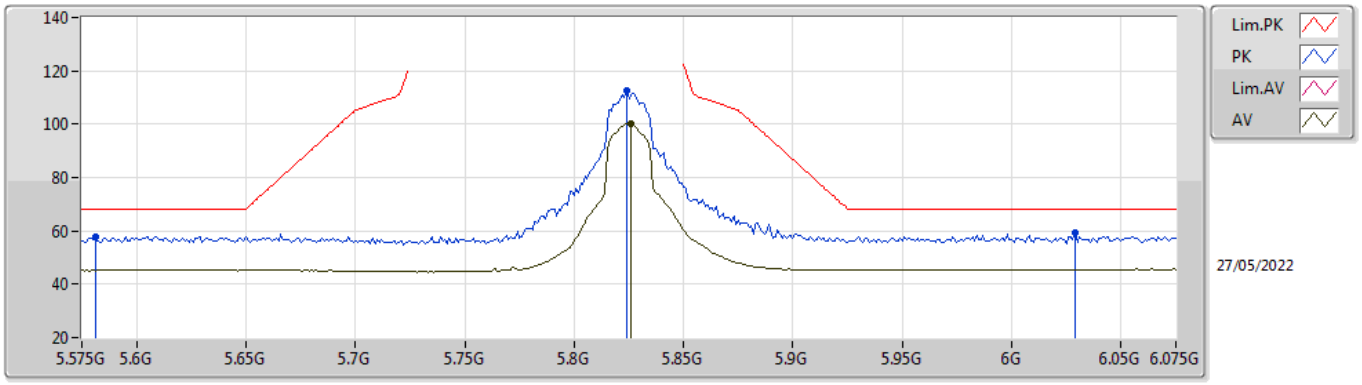


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.581G	57.89	68.20	-10.31	51.30	3	Vertical	189	1.80	-	34.60	7.38	35.39
PK	5.824G	112.60	Inf	-Inf	106.44	3	Vertical	189	1.80	-	34.25	7.42	35.51
AV	5.826G	100.03	Inf	-Inf	93.86	3	Vertical	189	1.80	-	34.25	7.43	35.51
PK	6.029G	59.16	68.20	-9.04	52.28	3	Vertical	189	1.80	-	34.86	7.61	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

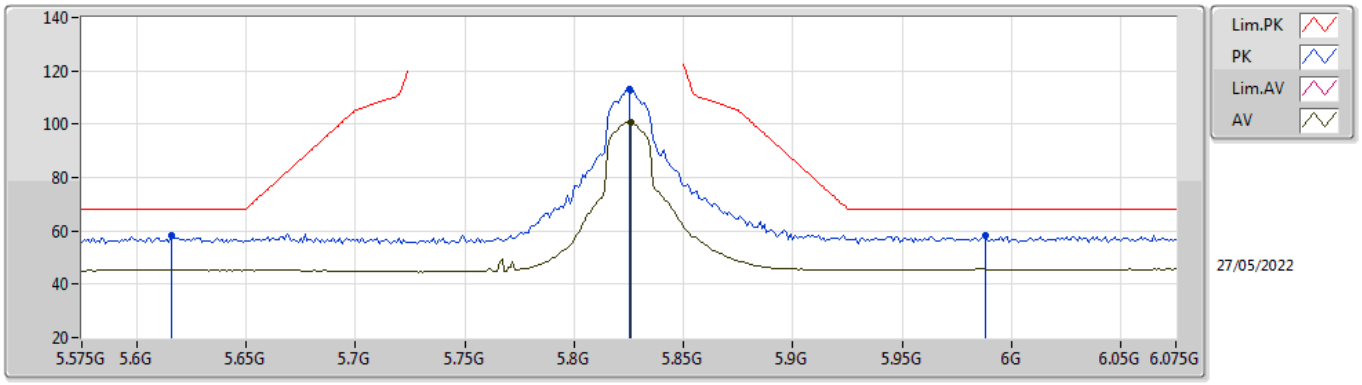


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.616G	58.19	68.20	-10.01	51.63	3	Horizontal	51	1.83	-	34.57	7.40	35.41
PK	5.825G	113.24	Inf	-Inf	107.07	3	Horizontal	51	1.83	-	34.25	7.43	35.51
AV	5.826G	100.78	Inf	-Inf	94.61	3	Horizontal	51	1.83	-	34.25	7.43	35.51
PK	5.988G	58.36	68.20	-9.84	51.56	3	Horizontal	51	1.83	-	34.80	7.59	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

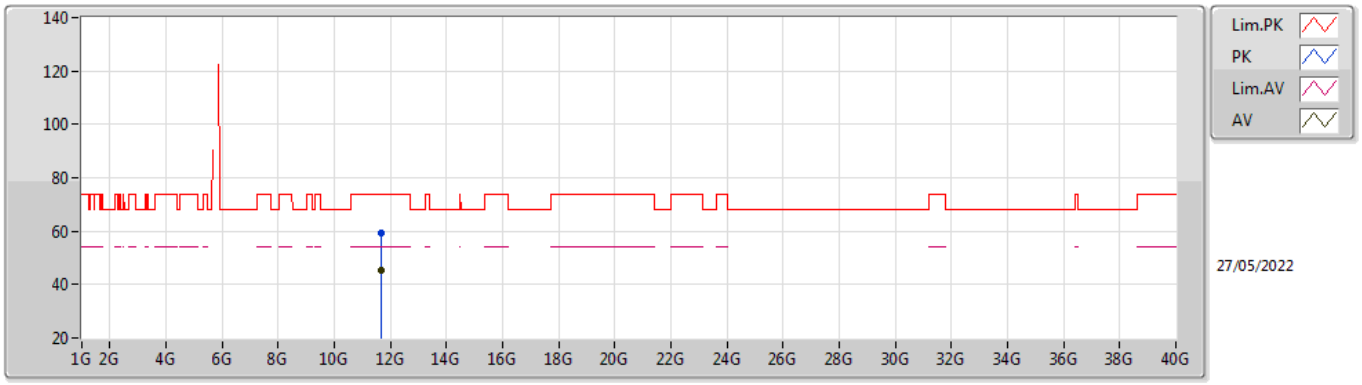


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6515G	59.26	74.00	-14.74	44.68	3	Vertical	133	1.04	-	39.40	10.75	35.57
AV	11.65216G	45.54	54.00	-8.46	30.96	3	Vertical	133	1.04	-	39.40	10.75	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

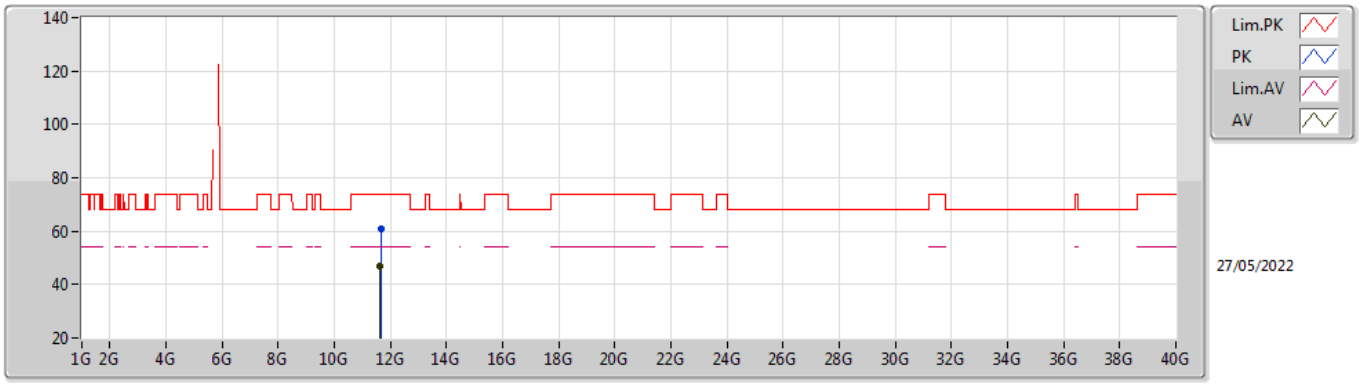


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65366G	60.79	74.00	-13.21	46.21	3	Horizontal	195	1.95	-	39.40	10.75	35.57
AV	11.64748G	46.94	54.00	-7.06	32.36	3	Horizontal	195	1.95	-	39.40	10.75	35.57

802.11ax HEW40_Nss1,(MCS0)_1TX

5190MHz_TnomVnom

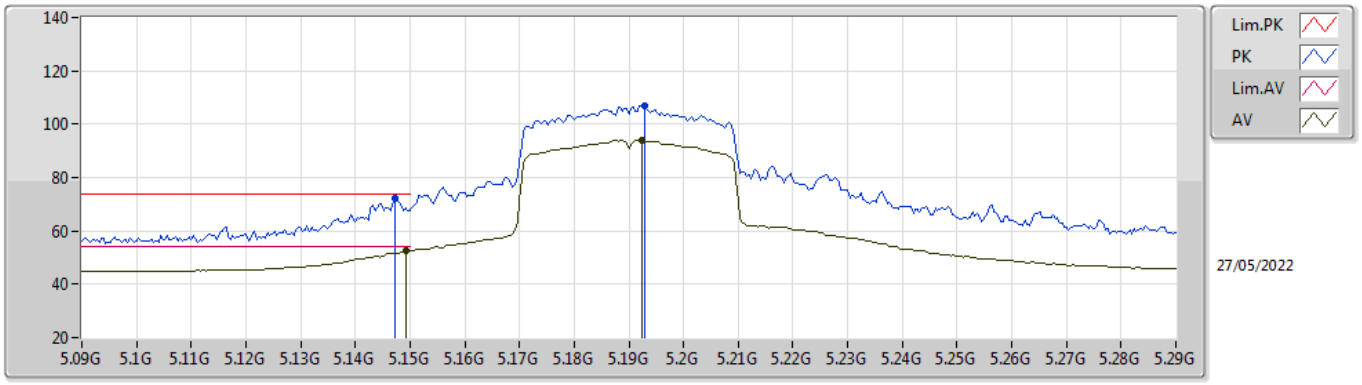


EUT Z_1TX
Setting 17.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1472G	72.19	74.00	-1.81	66.37	3	Vertical	138	1.97	-	33.99	7.17	35.34
AV	5.1492G	52.83	54.00	-1.17	47.00	3	Vertical	138	1.97	-	34.00	7.17	35.34
PK	5.1928G	107.04	Inf	-Inf	101.01	3	Vertical	138	1.97	-	34.17	7.20	35.34
AV	5.1924G	94.16	Inf	-Inf	88.13	3	Vertical	138	1.97	-	34.17	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5190MHz_TnomVnom

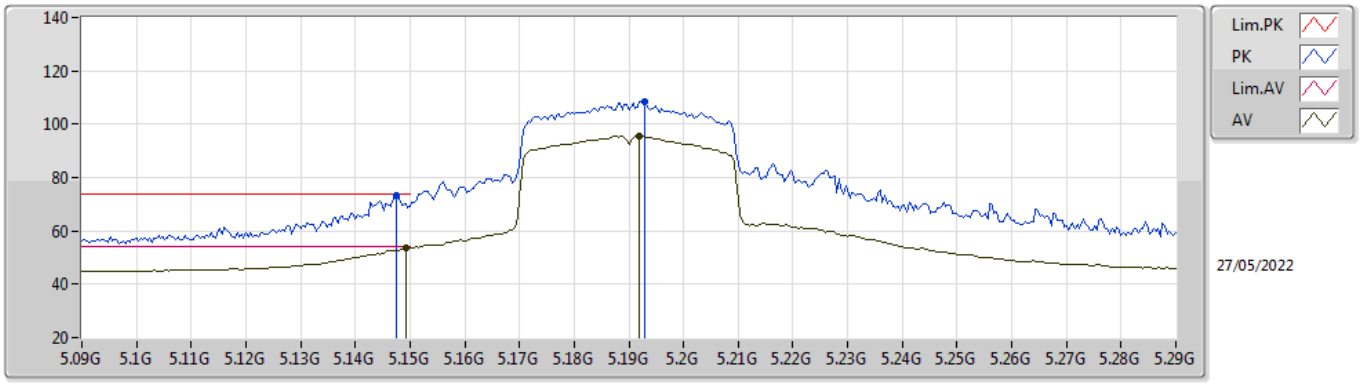


EUT Z_1TX
Setting 17.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1476G	73.51	74.00	-0.49	67.68	3	Horizontal	111	2.11	-	34.00	7.17	35.34
AV	5.1492G	53.63	54.00	-0.37	47.80	3	Horizontal	111	2.11	-	34.00	7.17	35.34
PK	5.1928G	108.38	Inf	-Inf	102.35	3	Horizontal	111	2.11	-	34.17	7.20	35.34
AV	5.192G	95.48	Inf	-Inf	89.45	3	Horizontal	111	2.11	-	34.17	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5190MHz_TnomVnom

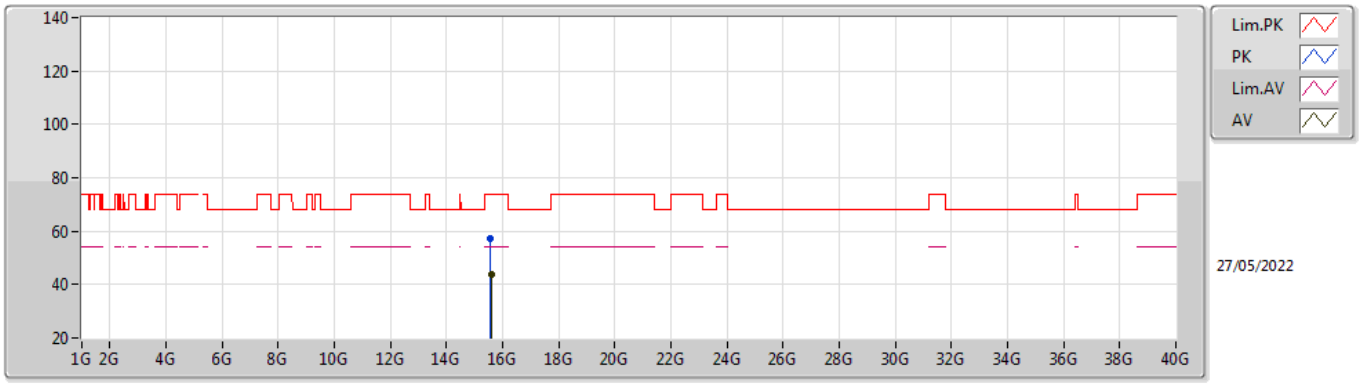


EUT X_1TX
Setting 17.75
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5803G	57.12	74.00	-16.88	41.23	3	Vertical	145	2.13	-	38.14	13.19	35.44
AV	15.5881G	43.96	54.00	-10.04	28.13	3	Vertical	145	2.13	-	38.08	13.19	35.44

802.11ax HEW40_Nss1,(MCS0)_1TX

5190MHz_TnomVnom

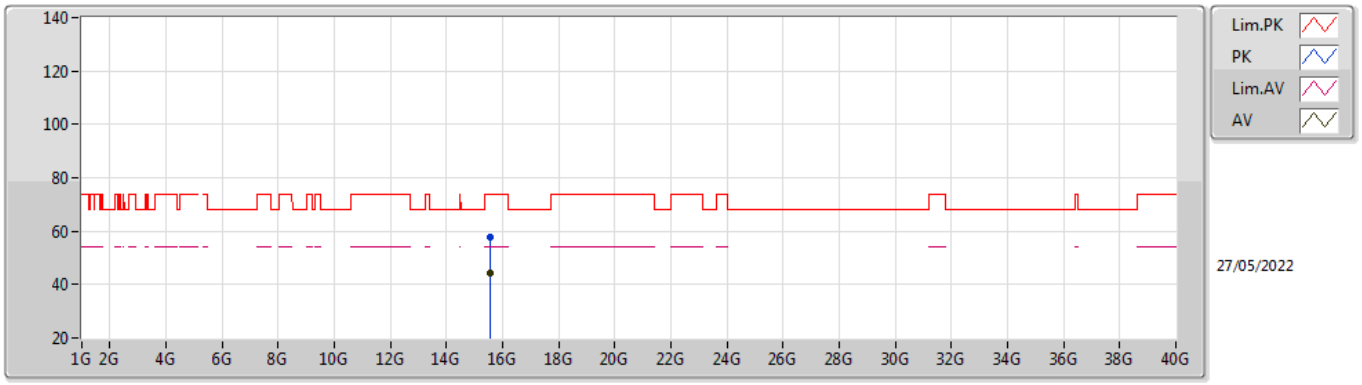


EUT X_1TX
Setting 17.75
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5798G	57.77	74.00	-16.23	41.88	3	Horizontal	282	1.85	-	38.14	13.19	35.44
AV	15.5782G	44.25	54.00	-9.75	28.35	3	Horizontal	282	1.85	-	38.15	13.19	35.44

802.11ax HEW40_Nss1,(MCS0)_1TX

5230MHz_TnomVnom

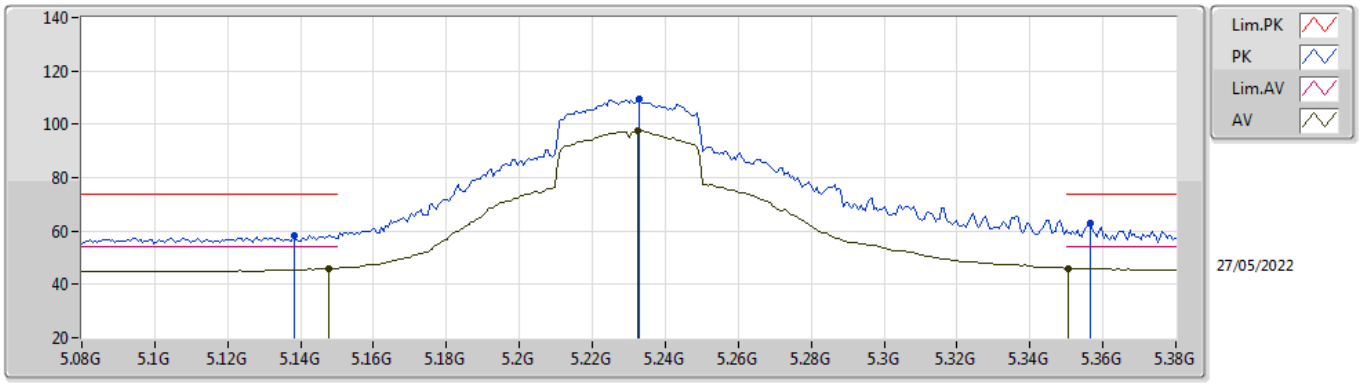


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1382G	58.35	74.00	-15.65	52.54	3	Vertical	138	2.05	-	33.98	7.17	35.34
AV	5.1478G	46.08	54.00	-7.92	40.25	3	Vertical	138	2.05	-	34.00	7.17	35.34
PK	5.233G	109.74	Inf	-Inf	103.55	3	Vertical	138	2.05	-	34.33	7.20	35.34
AV	5.2324G	97.82	Inf	-Inf	91.63	3	Vertical	138	2.05	-	34.33	7.20	35.34
PK	5.3566G	62.85	74.00	-11.15	56.48	3	Vertical	138	2.05	-	34.51	7.20	35.34
AV	5.3506G	46.08	54.00	-7.92	39.72	3	Vertical	138	2.05	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5230MHz_TnomVnom

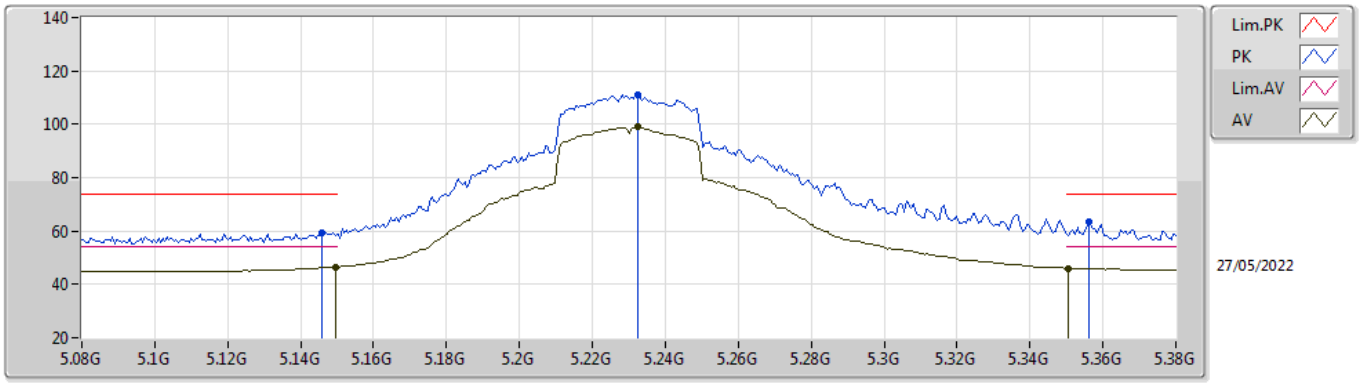


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.146G	59.43	74.00	-14.57	53.61	3	Horizontal	111	2.07	-	33.99	7.17	35.34
AV	5.1496G	46.48	54.00	-7.52	40.65	3	Horizontal	111	2.07	-	34.00	7.17	35.34
PK	5.2324G	111.14	Inf	-Inf	104.95	3	Horizontal	111	2.07	-	34.33	7.20	35.34
AV	5.2324G	98.97	Inf	-Inf	92.78	3	Horizontal	111	2.07	-	34.33	7.20	35.34
PK	5.356G	63.28	74.00	-10.72	56.91	3	Horizontal	111	2.07	-	34.51	7.20	35.34
AV	5.3506G	46.02	54.00	-7.98	39.66	3	Horizontal	111	2.07	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5230MHz_TnomVnom

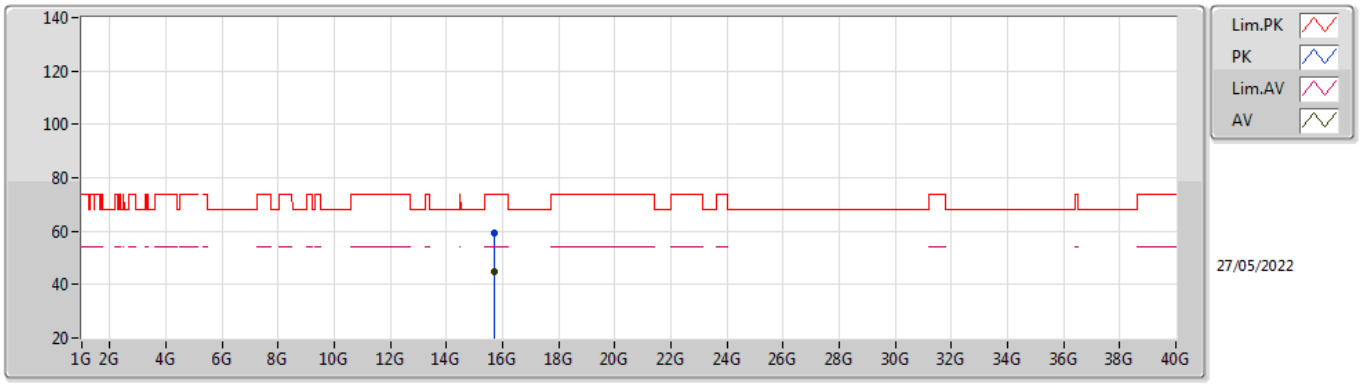


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6969G	59.12	74.00	-14.88	43.89	3	Vertical	122	1.20	-	37.52	13.25	35.54
AV	15.6906G	45.02	54.00	-8.98	29.75	3	Vertical	122	1.20	-	37.55	13.25	35.53

802.11ax HEW40_Nss1,(MCS0)_1TX

5230MHz_TnomVnom

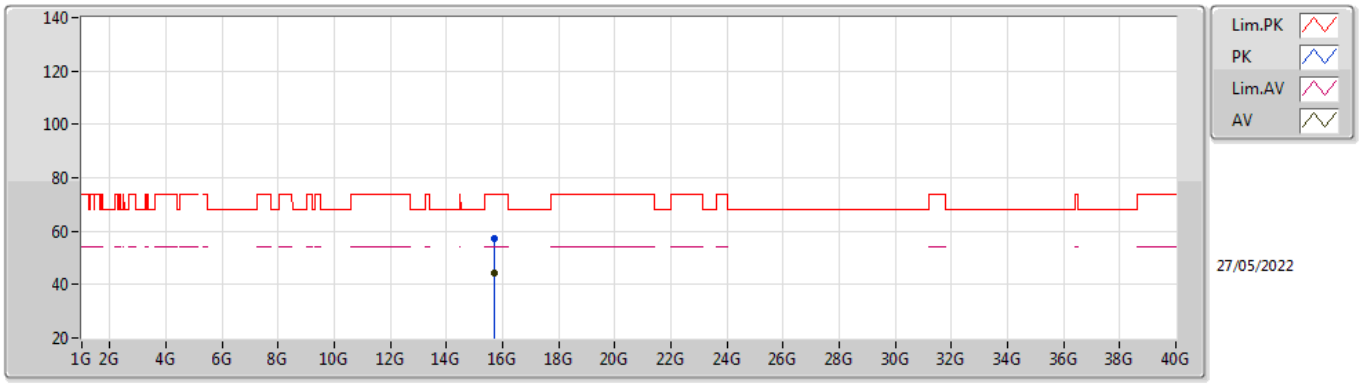


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6831G	57.31	74.00	-16.69	42.01	3	Horizontal	197	2.56	-	37.58	13.24	35.52
AV	15.6904G	44.35	54.00	-9.65	29.08	3	Horizontal	197	2.56	-	37.55	13.25	35.53

802.11ax HEW40_Nss1,(MCS0)_1TX

5270MHz_TnomVnom

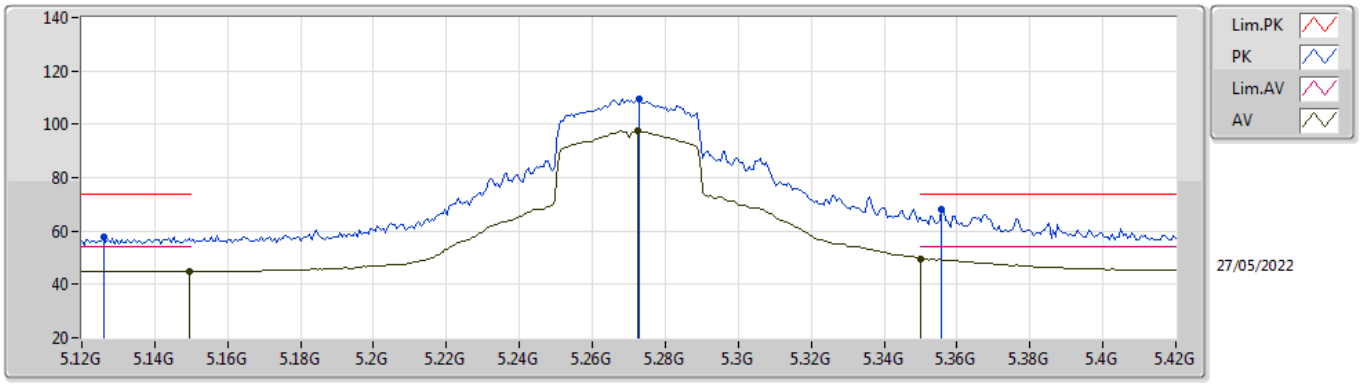


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.126G	57.60	74.00	-16.40	51.83	3	Vertical	139	1.92	-	33.95	7.16	35.34
AV	5.1494G	44.85	54.00	-9.15	39.02	3	Vertical	139	1.92	-	34.00	7.17	35.34
PK	5.273G	109.60	Inf	-Inf	103.29	3	Vertical	139	1.92	-	34.45	7.20	35.34
AV	5.2724G	97.47	Inf	-Inf	91.17	3	Vertical	139	1.92	-	34.44	7.20	35.34
PK	5.3558G	68.33	74.00	-5.67	61.96	3	Vertical	139	1.92	-	34.51	7.20	35.34
AV	5.35G	49.67	54.00	-4.33	43.31	3	Vertical	139	1.92	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5270MHz_TnomVnom

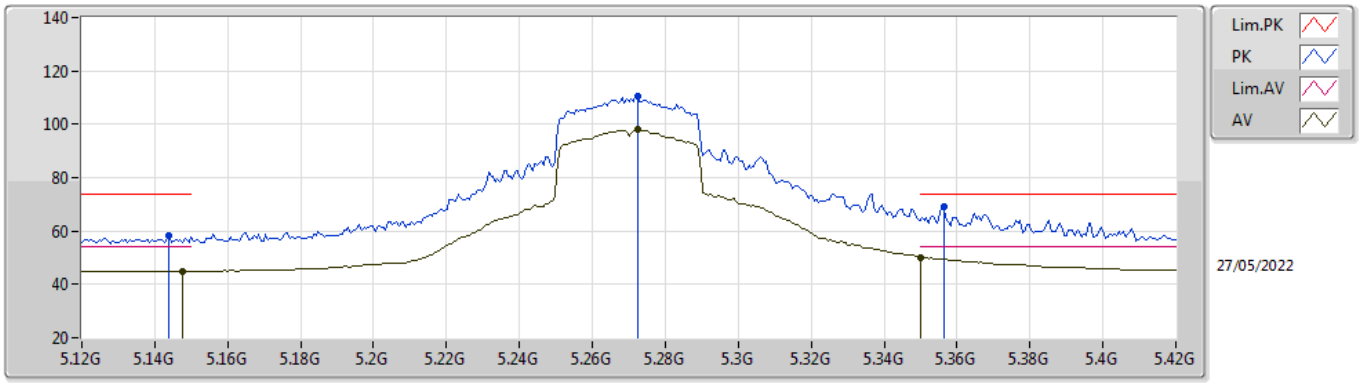


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.144G	58.05	74.00	-15.95	52.23	3	Horizontal	111	2.07	-	33.99	7.17	35.34
AV	5.1476G	45.01	54.00	-8.99	39.18	3	Horizontal	111	2.07	-	34.00	7.17	35.34
PK	5.2724G	110.58	Inf	-Inf	104.28	3	Horizontal	111	2.07	-	34.44	7.20	35.34
AV	5.2724G	97.96	Inf	-Inf	91.66	3	Horizontal	111	2.07	-	34.44	7.20	35.34
PK	5.3564G	69.08	74.00	-4.92	62.71	3	Horizontal	111	2.07	-	34.51	7.20	35.34
AV	5.35G	50.25	54.00	-3.75	43.89	3	Horizontal	111	2.07	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5270MHz_TnomVnom

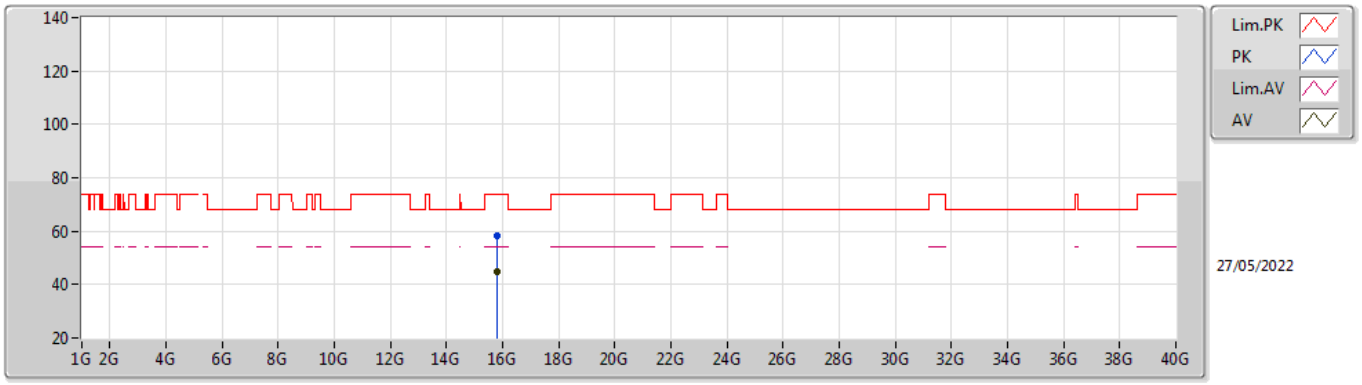


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7978G	58.36	74.00	-15.64	42.79	3	Vertical	10	2.07	-	37.89	13.30	35.62
AV	15.8126G	44.99	54.00	-9.01	29.45	3	Vertical	10	2.07	-	37.86	13.31	35.63

802.11ax HEW40_Nss1,(MCS0)_1TX

5270MHz_TnomVnom

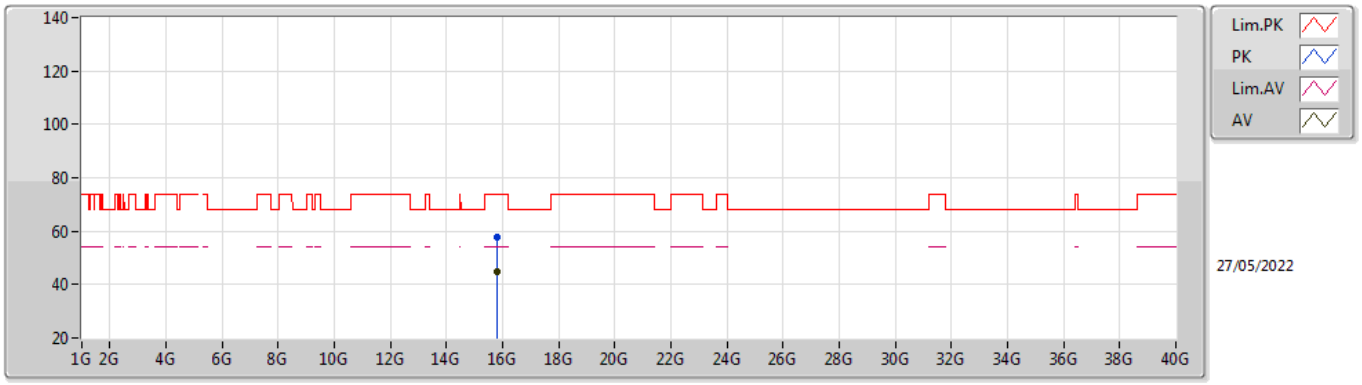


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.8112G	57.84	74.00	-16.16	42.29	3	Horizontal	28	2.97	-	37.87	13.31	35.63
AV	15.811G	44.79	54.00	-9.21	29.24	3	Horizontal	28	2.97	-	37.87	13.31	35.63

802.11ax HEW40_Nss1,(MCS0)_1TX

5310MHz_TnomVnom

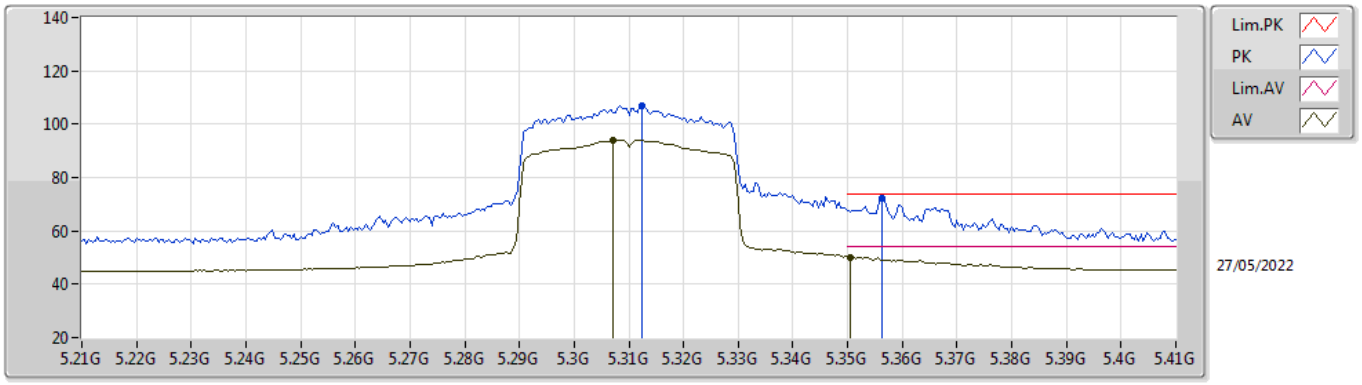


EUT Z_1TX
Setting 15
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3124G	106.86	Inf	-Inf	100.50	3	Vertical	138	1.91	-	34.50	7.20	35.34
AV	5.3072G	94.18	Inf	-Inf	87.82	3	Vertical	138	1.91	-	34.50	7.20	35.34
PK	5.3564G	72.45	74.00	-1.55	66.08	3	Vertical	138	1.91	-	34.51	7.20	35.34
AV	5.3504G	50.25	54.00	-3.75	43.89	3	Vertical	138	1.91	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5310MHz_TnomVnom

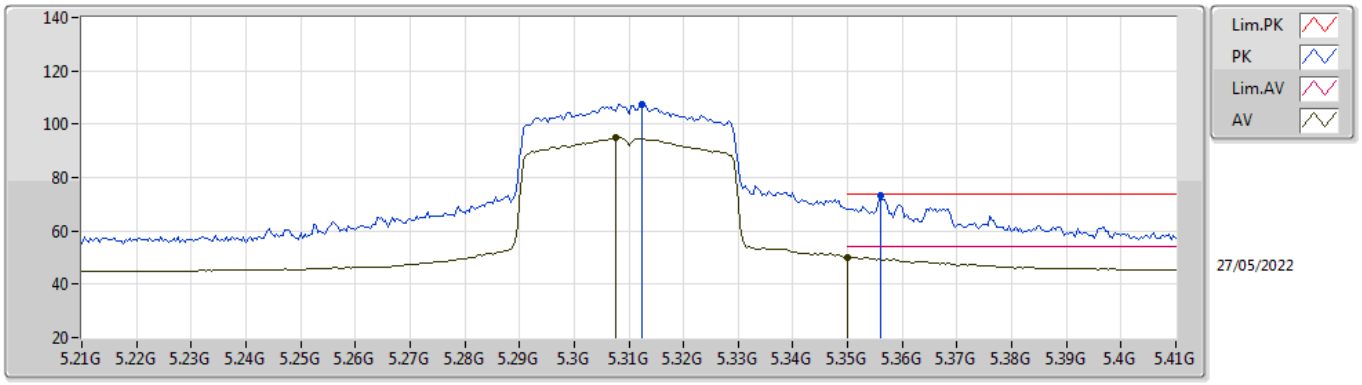


EUT Z_1TX
Setting 15
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3124G	107.45	Inf	-Inf	101.09	3	Horizontal	110	1.96	-	34.50	7.20	35.34
AV	5.3076G	95.09	Inf	-Inf	88.73	3	Horizontal	110	1.96	-	34.50	7.20	35.34
PK	5.356G	73.20	74.00	-0.80	66.83	3	Horizontal	110	1.96	-	34.51	7.20	35.34
AV	5.35G	50.22	54.00	-3.78	43.86	3	Horizontal	110	1.96	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5310MHz_TnomVnom

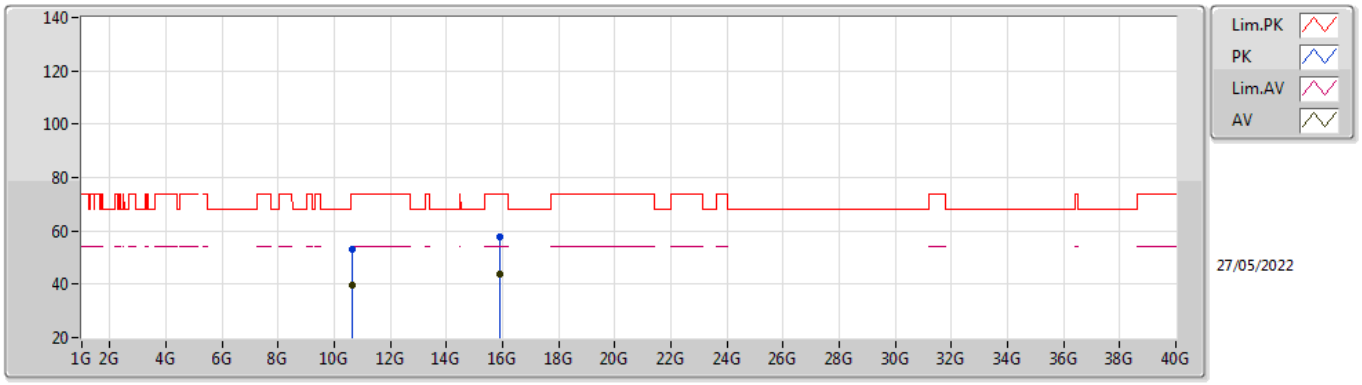


EUT X_1TX
Setting 15
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6446G	53.01	74.00	-20.99	39.47	3	Vertical	28	2.95	-	38.29	10.60	35.35
AV	10.643G	39.45	54.00	-14.55	25.91	3	Vertical	28	2.95	-	38.29	10.60	35.35
PK	15.9245G	57.61	74.00	-16.39	42.43	3	Vertical	303	2.38	-	37.55	13.36	35.73
AV	15.9247G	43.82	54.00	-10.18	28.64	3	Vertical	303	2.38	-	37.55	13.36	35.73

802.11ax HEW40_Nss1,(MCS0)_1TX

5310MHz_TnomVnom

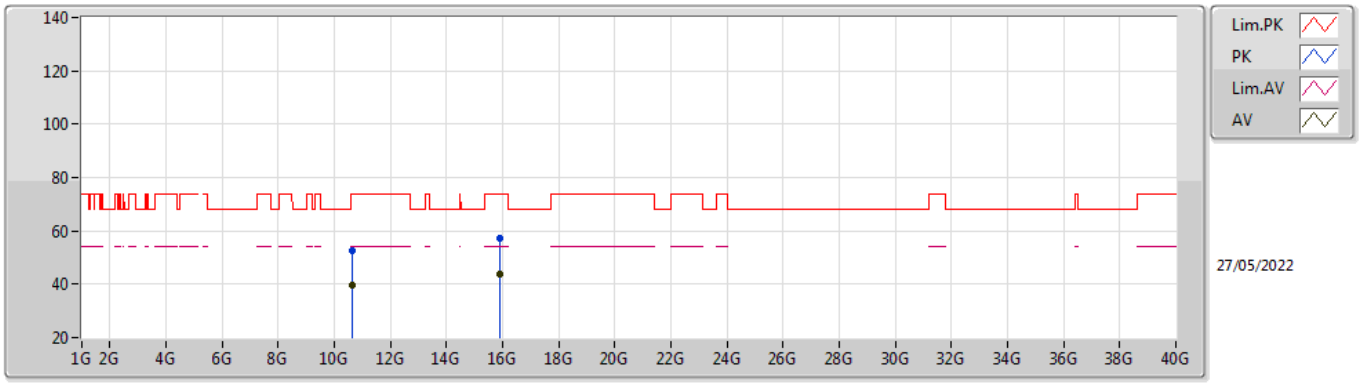


EUT X_1TX
Setting 15
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.638G	52.46	74.00	-21.54	38.93	3	Horizontal	316	1.69	-	38.28	10.60	35.35
AV	10.635G	39.40	54.00	-14.60	25.88	3	Horizontal	316	1.69	-	38.27	10.60	35.35
PK	15.918G	57.39	74.00	-16.61	42.19	3	Horizontal	246	1.44	-	37.56	13.36	35.72
AV	15.906G	43.88	54.00	-10.12	28.65	3	Horizontal	246	1.44	-	37.59	13.35	35.71

802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TnomVnom

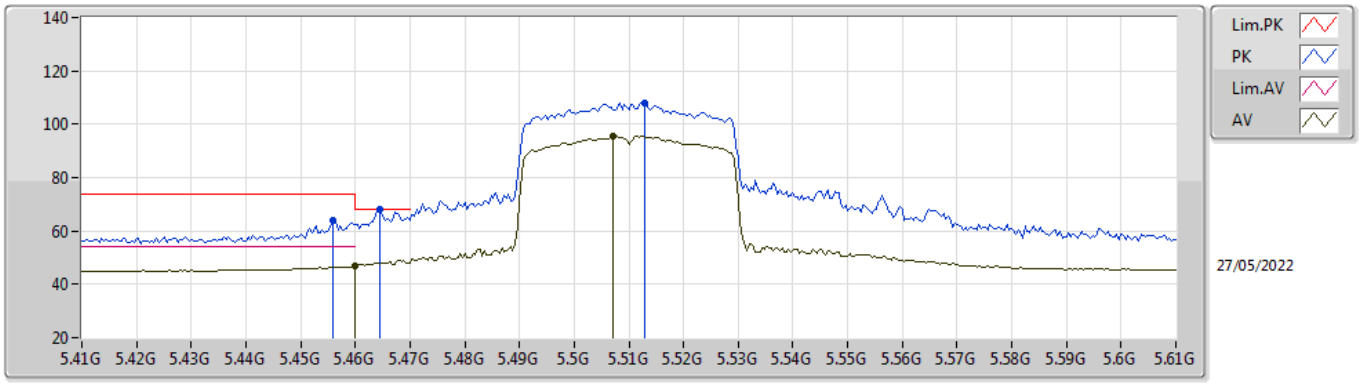


EUT Z_1TX
Setting 16.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.456G	63.74	74.00	-10.26	57.32	3	Vertical	37	1.97	-	34.51	7.26	35.35
AV	5.46G	46.93	54.00	-7.07	40.50	3	Vertical	37	1.97	-	34.52	7.26	35.35
PK	5.4644G	67.92	68.20	-0.28	61.48	3	Vertical	37	1.97	-	34.53	7.26	35.35
PK	5.5128G	108.15	Inf	-Inf	101.60	3	Vertical	37	1.97	-	34.60	7.31	35.36
AV	5.5072G	95.59	Inf	-Inf	89.03	3	Vertical	37	1.97	-	34.60	7.31	35.35

802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TnomVnom

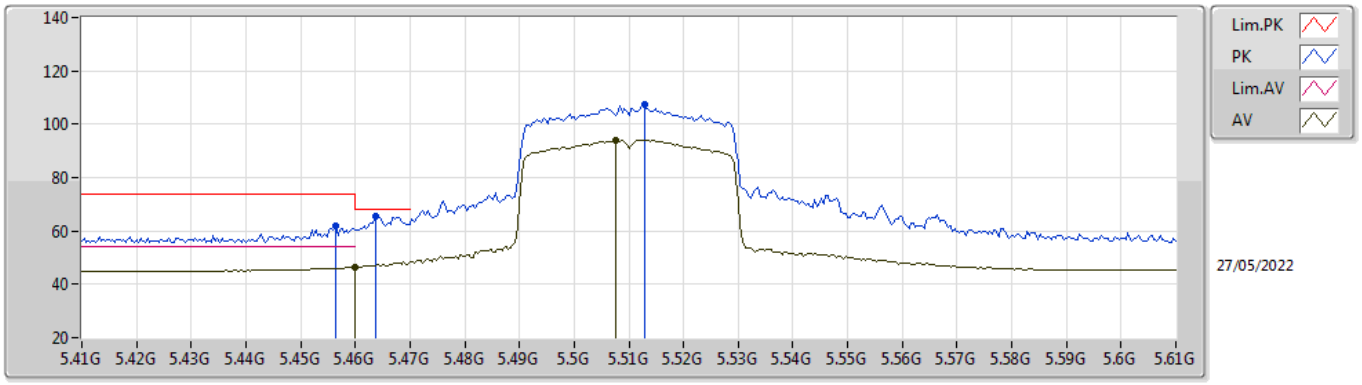


EUT Z_1TX
Setting 16.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4564G	62.06	74.00	-11.94	55.64	3	Horizontal	57	1.85	-	34.51	7.26	35.35
AV	5.46G	46.41	54.00	-7.59	39.98	3	Horizontal	57	1.85	-	34.52	7.26	35.35
PK	5.4636G	65.36	68.20	-2.84	58.92	3	Horizontal	57	1.85	-	34.53	7.26	35.35
PK	5.5128G	107.31	Inf	-Inf	100.76	3	Horizontal	57	1.85	-	34.60	7.31	35.36
AV	5.5076G	94.07	Inf	-Inf	87.51	3	Horizontal	57	1.85	-	34.60	7.31	35.35

802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TnomVnom

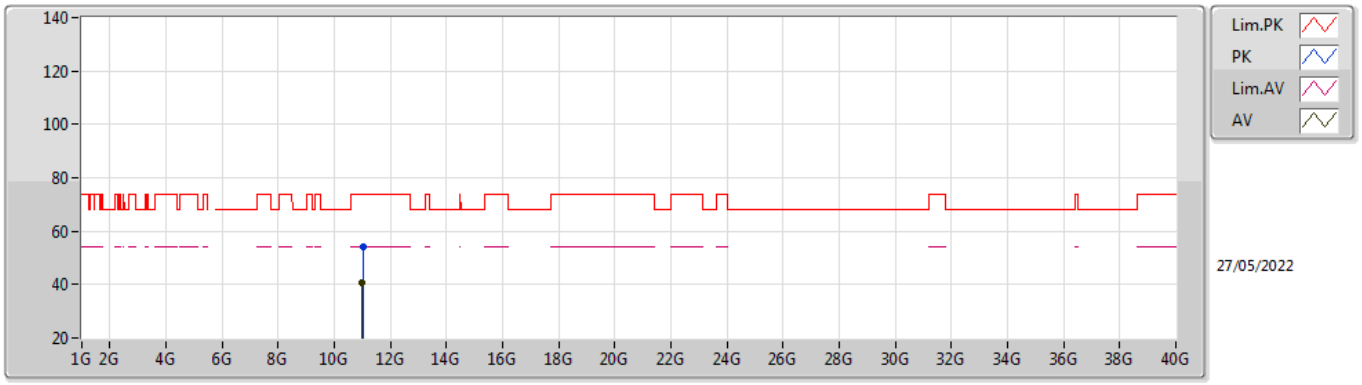


EUT X_1TX
Setting 16.25
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.024G	54.10	74.00	-19.90	40.10	3	Vertical	163	2.84	-	38.42	10.65	35.07
AV	11.0066G	40.57	54.00	-13.43	26.56	3	Vertical	163	2.84	-	38.41	10.65	35.05

802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TnomVnom

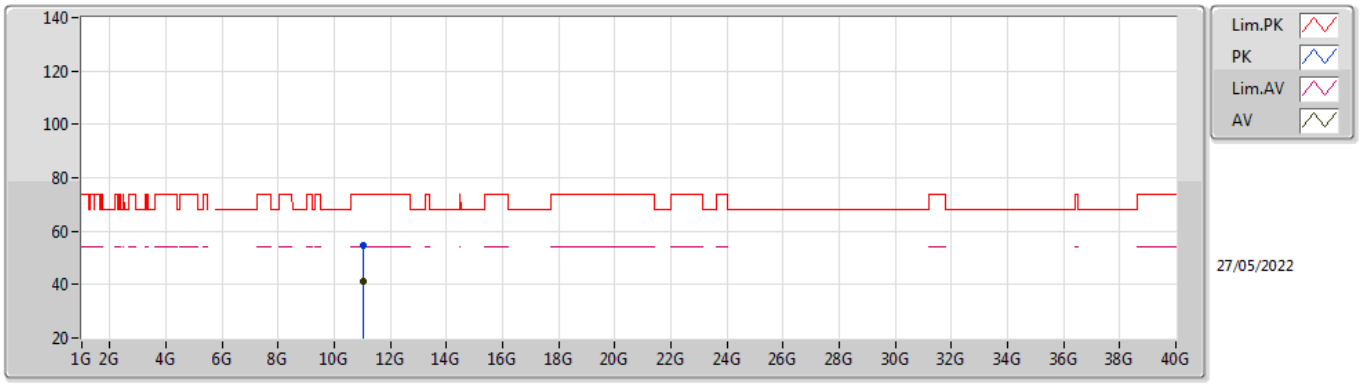


EUT X_1TX
Setting 16.25
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0157G	54.71	74.00	-19.29	40.70	3	Horizontal	252	1.36	-	38.42	10.65	35.06
AV	11.0201G	41.30	54.00	-12.70	27.29	3	Horizontal	252	1.36	-	38.42	10.65	35.06

802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TnomVnom

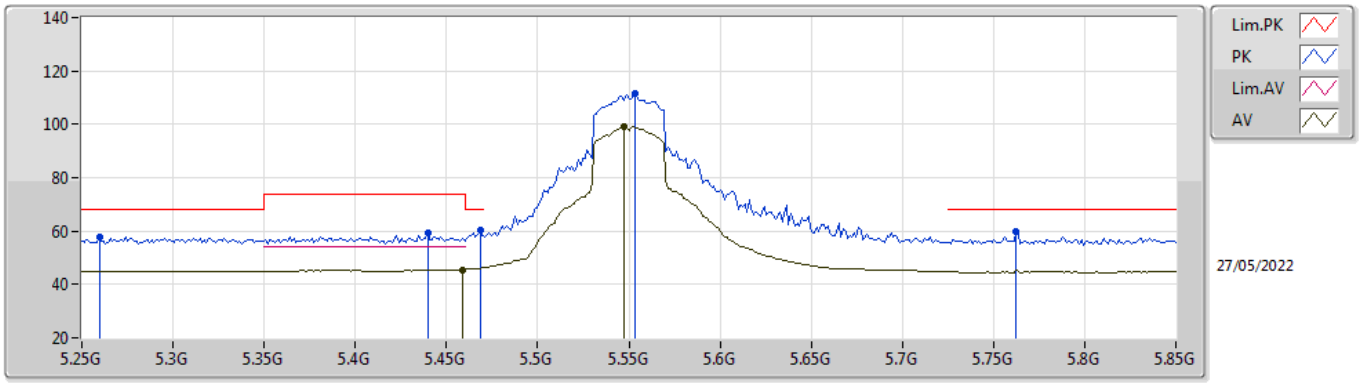


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2596G	57.98	68.20	-10.22	51.70	3	Vertical	39	2.09	-	34.42	7.20	35.34
PK	5.4396G	59.22	74.00	-14.78	52.81	3	Vertical	39	2.09	-	34.52	7.24	35.35
PK	5.4684G	60.25	68.20	-7.95	53.79	3	Vertical	39	2.09	-	34.54	7.27	35.35
AV	5.4588G	45.59	54.00	-8.41	39.16	3	Vertical	39	2.09	-	34.52	7.26	35.35
PK	5.5536G	111.51	Inf	-Inf	104.94	3	Vertical	39	2.09	-	34.60	7.35	35.38
AV	5.5476G	99.07	Inf	-Inf	92.49	3	Vertical	39	2.09	-	34.60	7.35	35.37
PK	5.7624G	59.97	68.20	-8.23	53.85	3	Vertical	39	2.09	-	34.20	7.40	35.48

802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TnomVnom

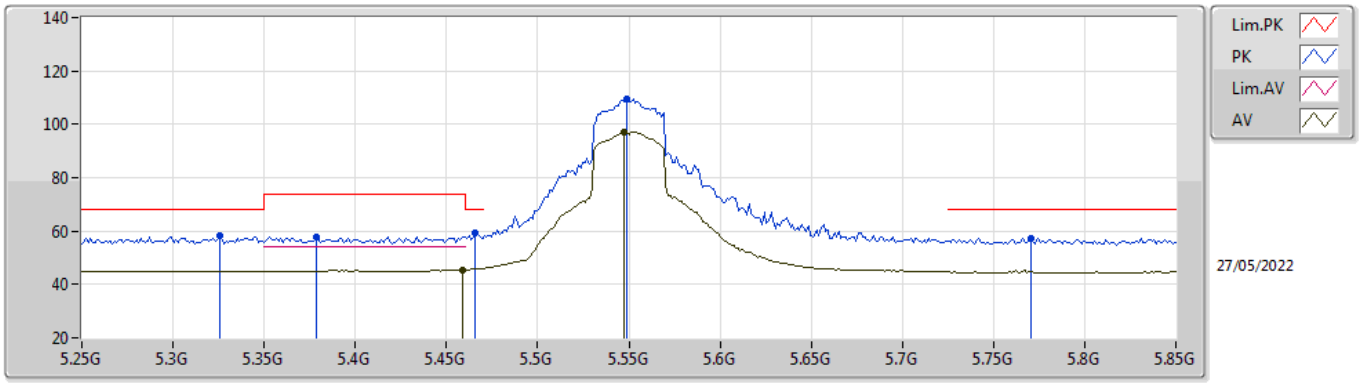


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3256G	58.48	68.20	-9.72	52.12	3	Horizontal	56	1.90	-	34.50	7.20	35.34
PK	5.3784G	57.98	74.00	-16.02	51.57	3	Horizontal	56	1.90	-	34.56	7.20	35.35
PK	5.466G	59.32	68.20	-8.88	52.87	3	Horizontal	56	1.90	-	34.53	7.27	35.35
AV	5.4588G	45.40	54.00	-8.60	38.97	3	Horizontal	56	1.90	-	34.52	7.26	35.35
PK	5.5488G	109.60	Inf	-Inf	103.02	3	Horizontal	56	1.90	-	34.60	7.35	35.37
AV	5.5476G	97.26	Inf	-Inf	90.68	3	Horizontal	56	1.90	-	34.60	7.35	35.37
PK	5.7708G	57.43	68.20	-10.77	51.32	3	Horizontal	56	1.90	-	34.20	7.40	35.49

802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TnomVnom

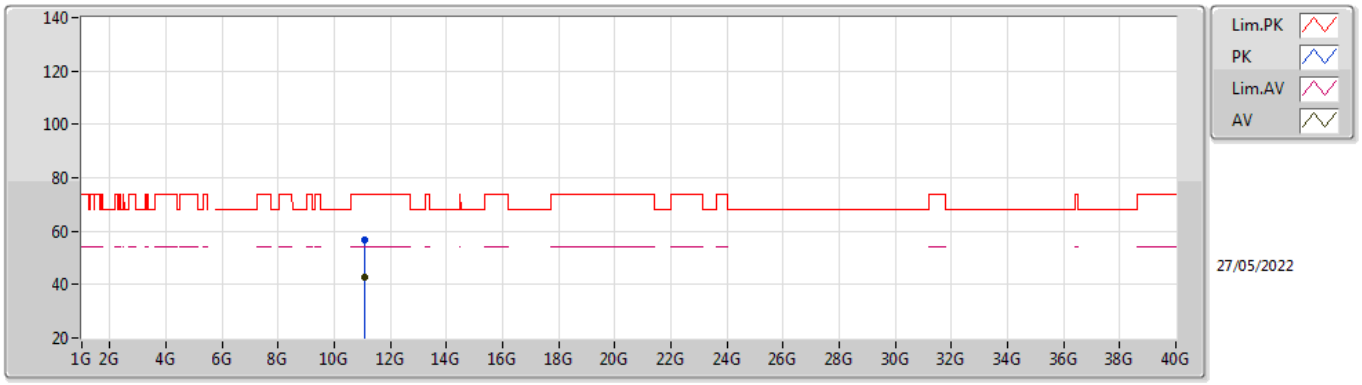


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0901G	56.67	74.00	-17.33	42.66	3	Vertical	149	3.00	-	38.49	10.66	35.14
AV	11.0958G	42.83	54.00	-11.17	28.82	3	Vertical	149	3.00	-	38.50	10.66	35.15

802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TnomVnom

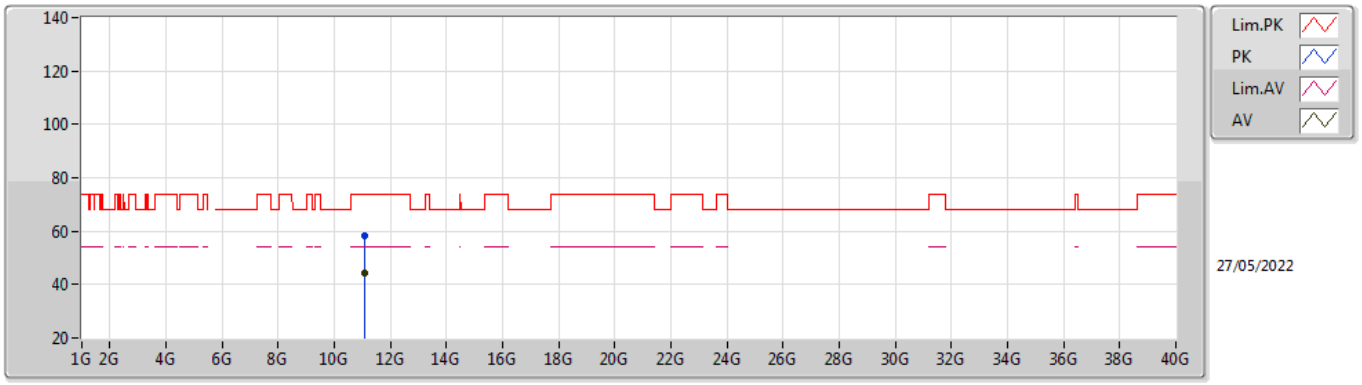


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1007G	58.45	74.00	-15.55	44.43	3	Horizontal	135	2.14	-	38.50	10.67	35.15
AV	11.0959G	44.31	54.00	-9.69	30.30	3	Horizontal	135	2.14	-	38.50	10.66	35.15

802.11ax HEW40_Nss1,(MCS0)_1TX

5670MHz_TnomVnom

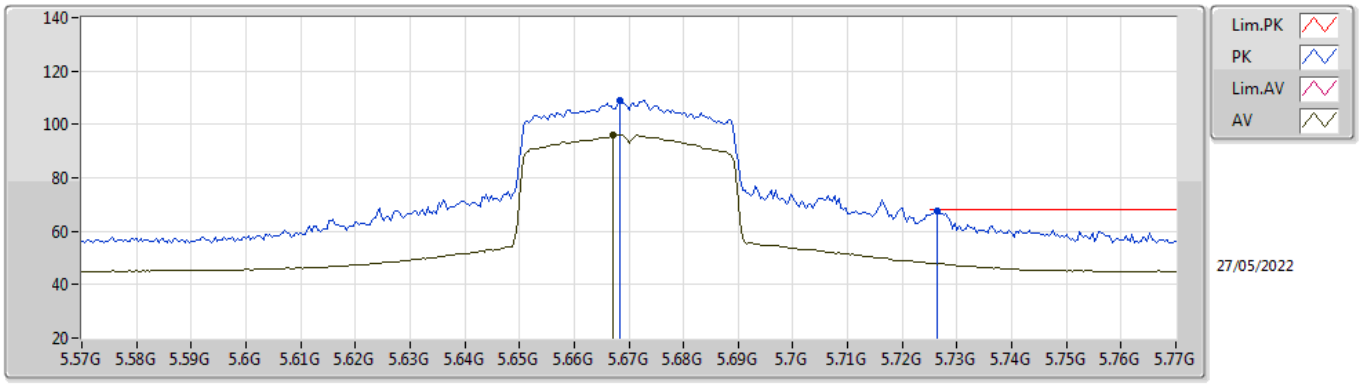


EUT Z_1TX
Setting 15.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6684G	108.95	Inf	-Inf	102.55	3	Vertical	38	1.92	-	34.43	7.40	35.43
AV	5.6672G	96.10	Inf	-Inf	89.70	3	Vertical	38	1.92	-	34.43	7.40	35.43
PK	5.7264G	67.82	68.20	-0.38	61.63	3	Vertical	38	1.92	-	34.25	7.40	35.46

802.11ax HEW40_Nss1,(MCS0)_1TX

5670MHz_TnomVnom

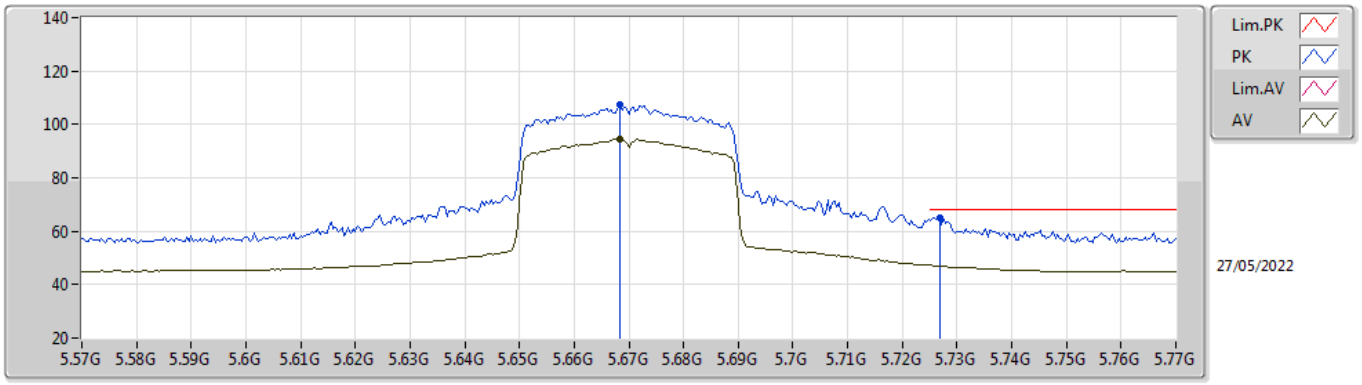


EUT Z_1TX
Setting 15.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6684G	107.24	Inf	-Inf	100.84	3	Horizontal	53	1.94	-	34.43	7.40	35.43
AV	5.6684G	94.40	Inf	-Inf	88.00	3	Horizontal	53	1.94	-	34.43	7.40	35.43
PK	5.7268G	65.04	68.20	-3.16	58.85	3	Horizontal	53	1.94	-	34.25	7.40	35.46

802.11ax HEW40_Nss1,(MCS0)_1TX

5670MHz_TnomVnom

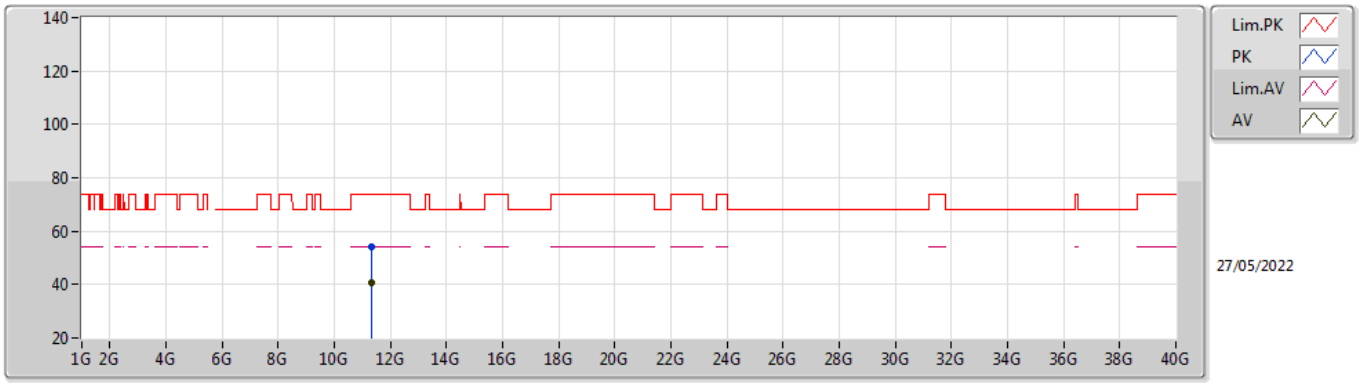


EUT X_1TX
Setting 15.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.3447G	54.22	74.00	-19.78	40.21	3	Vertical	342	3.00	-	38.74	10.70	35.43
AV	11.348G	40.66	54.00	-13.34	26.64	3	Vertical	342	3.00	-	38.75	10.70	35.43

802.11ax HEW40_Nss1,(MCS0)_1TX

5670MHz_TnomVnom

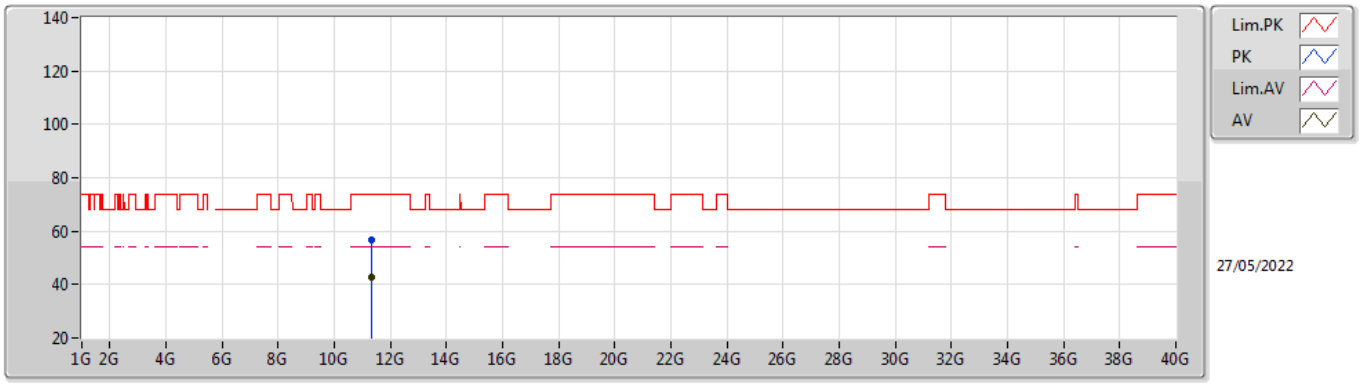


EUT X_1TX
Setting 15.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.3276G	56.59	74.00	-17.41	42.57	3	Horizontal	137	2.08	-	38.73	10.70	35.41
AV	11.3358G	42.68	54.00	-11.32	28.66	3	Horizontal	137	2.08	-	38.74	10.70	35.42

802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

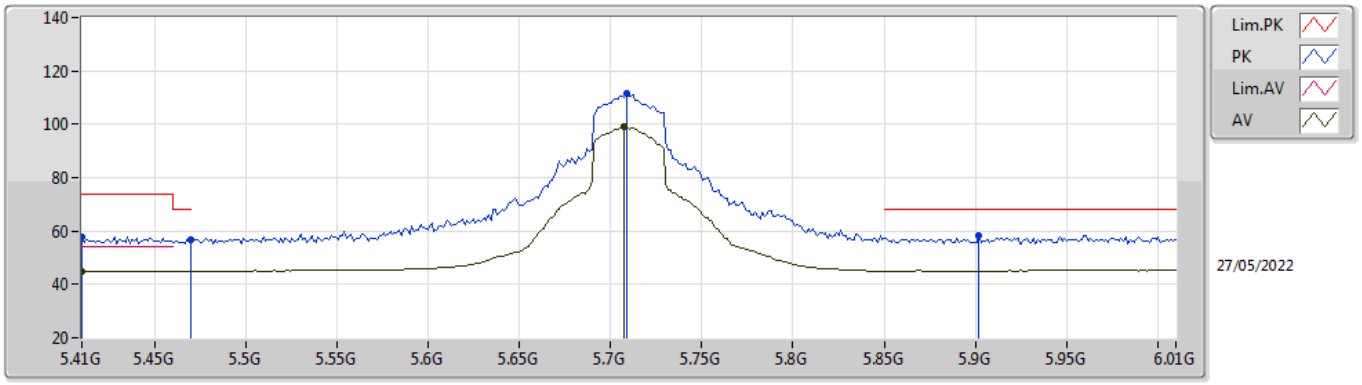


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.41G	57.83	74.00	-16.17	51.39	3	Vertical	38	1.86	-	34.58	7.21	35.35
AV	5.41G	45.01	54.00	-8.99	38.57	3	Vertical	38	1.86	-	34.58	7.21	35.35
PK	5.47G	56.84	68.20	-11.36	50.38	3	Vertical	38	1.86	-	34.54	7.27	35.35
PK	5.7088G	111.32	Inf	-Inf	105.09	3	Vertical	38	1.86	-	34.28	7.40	35.45
AV	5.7076G	99.17	Inf	-Inf	92.94	3	Vertical	38	1.86	-	34.28	7.40	35.45
PK	5.902G	58.53	68.20	-9.67	51.97	3	Vertical	38	1.86	-	34.61	7.50	35.55

802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

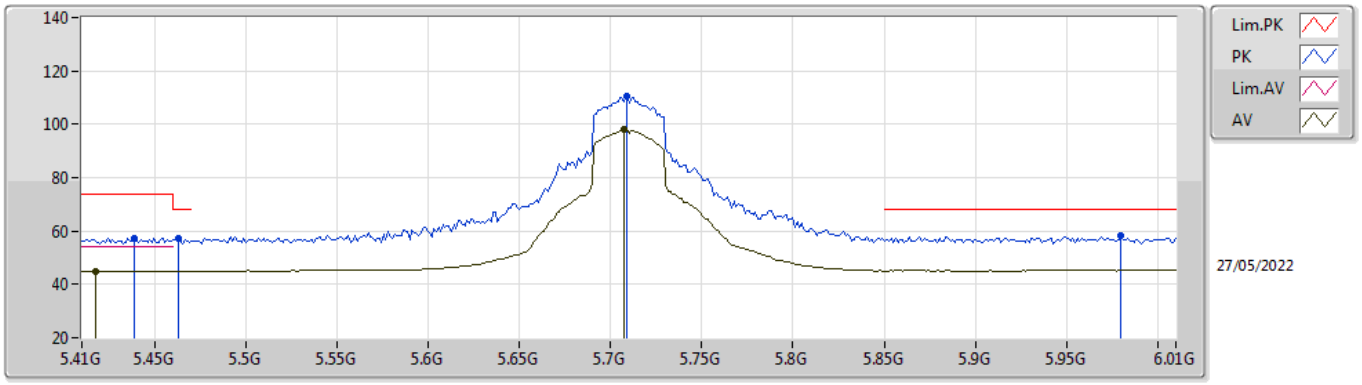


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4388G	57.27	74.00	-16.73	50.86	3	Horizontal	53	1.88	-	34.52	7.24	35.35
AV	5.4172G	44.95	54.00	-9.05	38.51	3	Horizontal	53	1.88	-	34.57	7.22	35.35
PK	5.4628G	57.13	68.20	-11.07	50.69	3	Horizontal	53	1.88	-	34.53	7.26	35.35
PK	5.7088G	110.31	Inf	-Inf	104.08	3	Horizontal	53	1.88	-	34.28	7.40	35.45
AV	5.7076G	98.11	Inf	-Inf	91.88	3	Horizontal	53	1.88	-	34.28	7.40	35.45
PK	5.98G	58.06	68.20	-10.14	51.27	3	Horizontal	53	1.88	-	34.80	7.58	35.59

802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

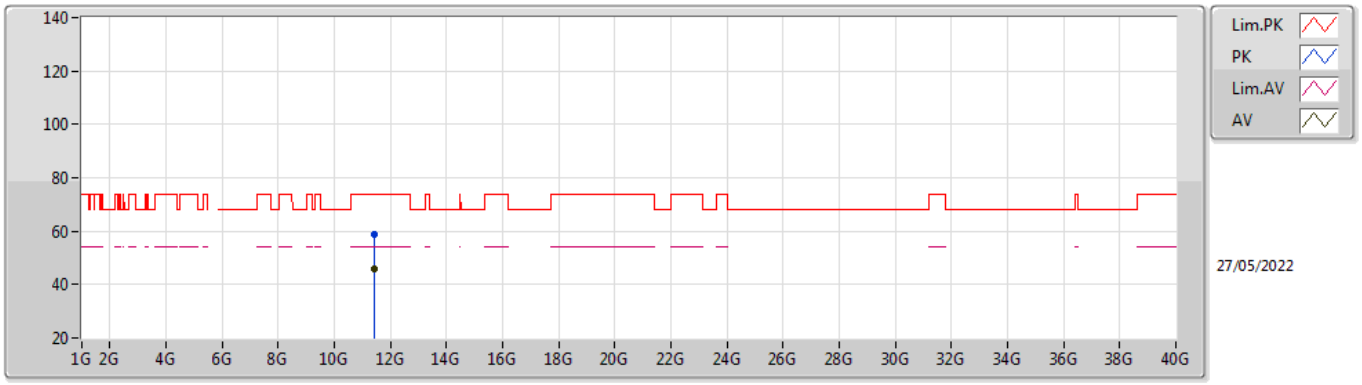


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4204G	58.84	74.00	-15.16	44.80	3	Vertical	179	2.79	-	38.84	10.71	35.51
AV	11.4159G	45.70	54.00	-8.30	31.67	3	Vertical	179	2.79	-	38.83	10.71	35.51

802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

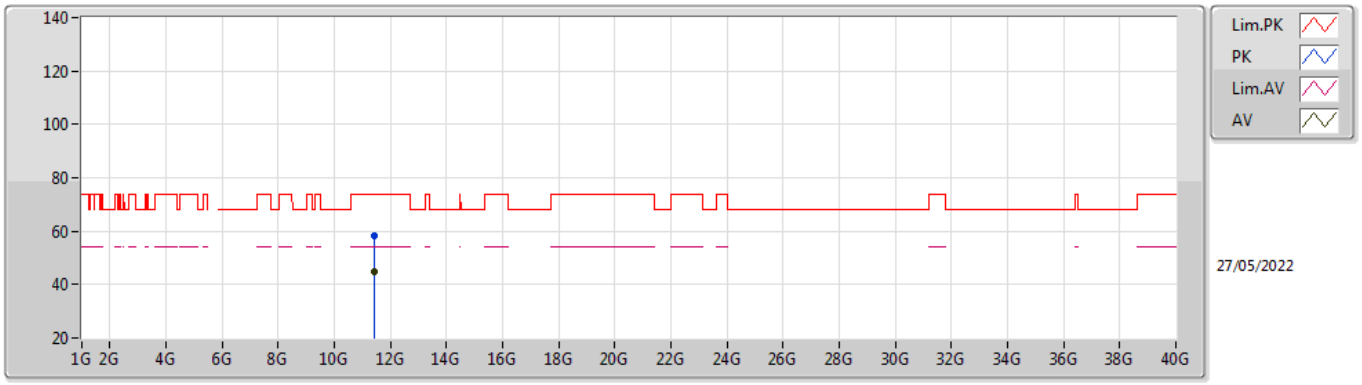


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.425G	58.24	74.00	-15.76	44.20	3	Horizontal	137	2.07	-	38.85	10.71	35.52
AV	11.4159G	44.84	54.00	-9.16	30.81	3	Horizontal	137	2.07	-	38.83	10.71	35.51

802.11ax HEW40_Nss1,(MCS0)_1TX

5755MHz_TnomVnom

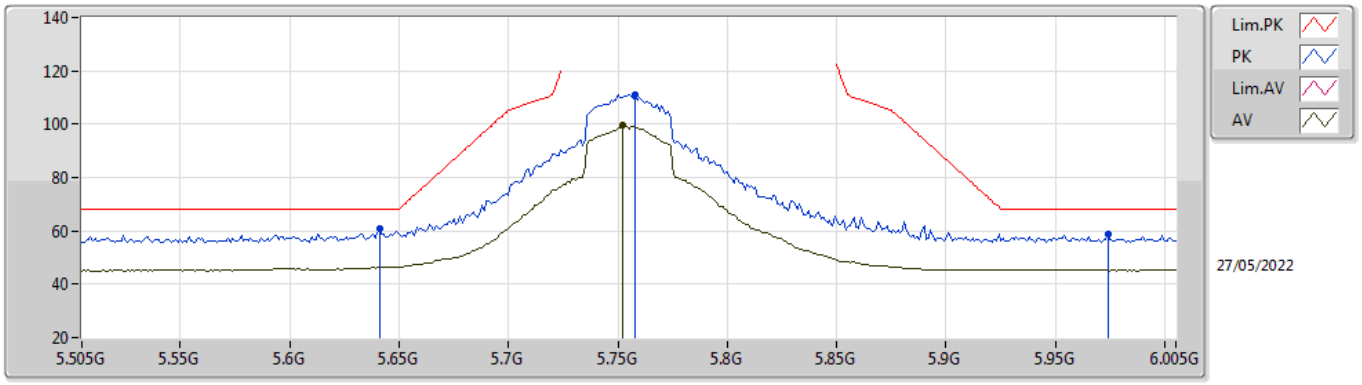


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.641G	60.79	68.20	-7.41	54.29	3	Vertical	38	1.91	-	34.52	7.40	35.42
PK	5.758G	111.25	Inf	-Inf	105.13	3	Vertical	38	1.91	-	34.20	7.40	35.48
AV	5.752G	99.47	Inf	-Inf	93.35	3	Vertical	38	1.91	-	34.20	7.40	35.48
PK	5.974G	58.54	68.20	-9.66	51.76	3	Vertical	38	1.91	-	34.80	7.57	35.59

802.11ax HEW40_Nss1,(MCS0)_1TX

5755MHz_TnomVnom

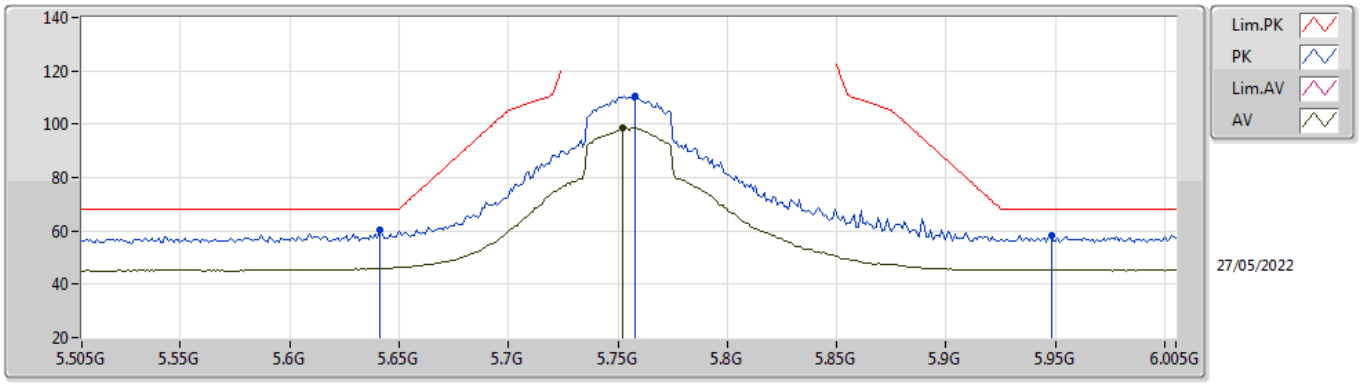


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.641G	60.43	68.20	-7.77	53.93	3	Horizontal	52	1.90	-	34.52	7.40	35.42
PK	5.758G	110.63	Inf	-Inf	104.51	3	Horizontal	52	1.90	-	34.20	7.40	35.48
AV	5.752G	98.78	Inf	-Inf	92.66	3	Horizontal	52	1.90	-	34.20	7.40	35.48
PK	5.948G	58.21	68.20	-9.99	51.44	3	Horizontal	52	1.90	-	34.79	7.55	35.57

802.11ax HEW40_Nss1,(MCS0)_1TX

5755MHz_TnomVnom

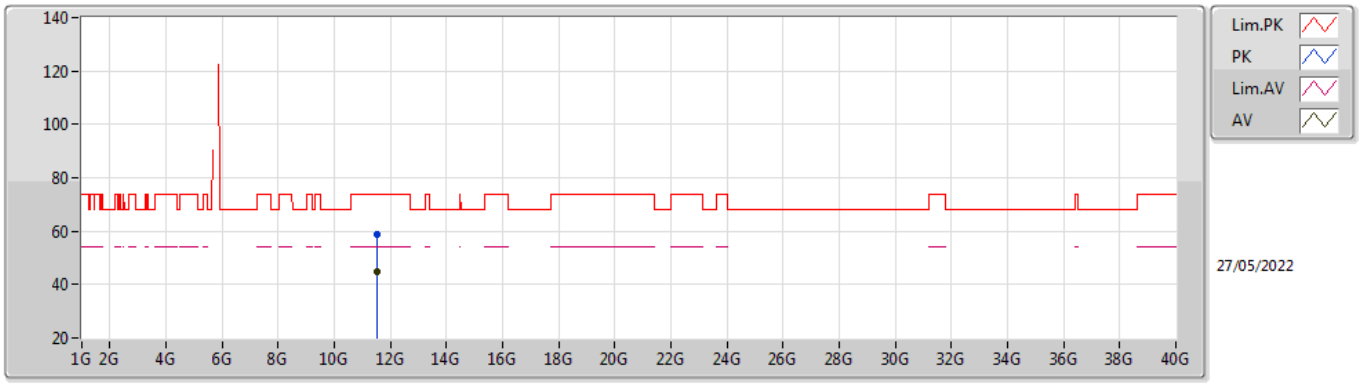


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5086G	58.92	74.00	-15.08	44.76	3	Vertical	179	2.80	-	39.03	10.73	35.60
AV	11.5058G	44.95	54.00	-9.05	30.80	3	Vertical	179	2.80	-	39.02	10.73	35.60

802.11ax HEW40_Nss1,(MCS0)_1TX

5755MHz_TnomVnom

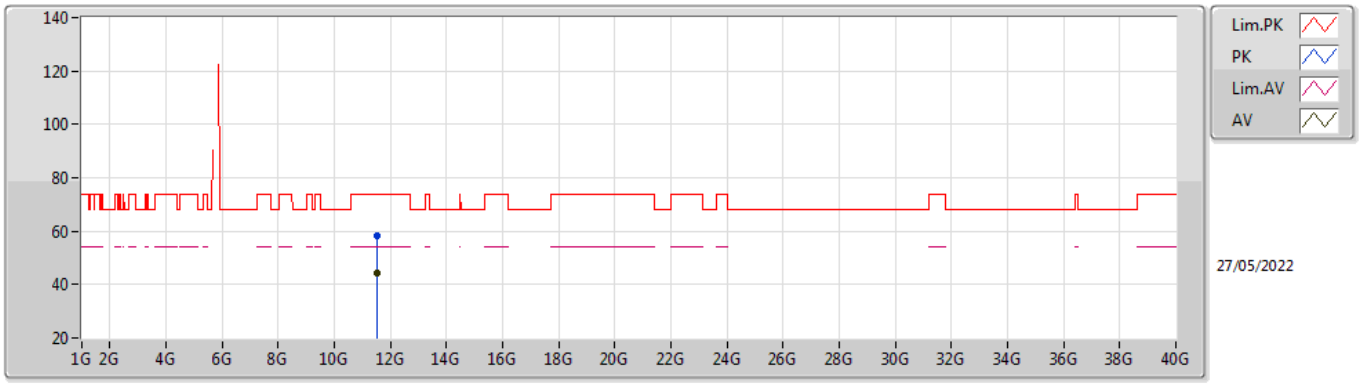


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5104G	58.27	74.00	-15.73	44.10	3	Horizontal	137	2.05	-	39.04	10.73	35.60
AV	11.5059G	44.32	54.00	-9.68	30.17	3	Horizontal	137	2.05	-	39.02	10.73	35.60

802.11ax HEW40_Nss1,(MCS0)_1TX

5795MHz_TnomVnom

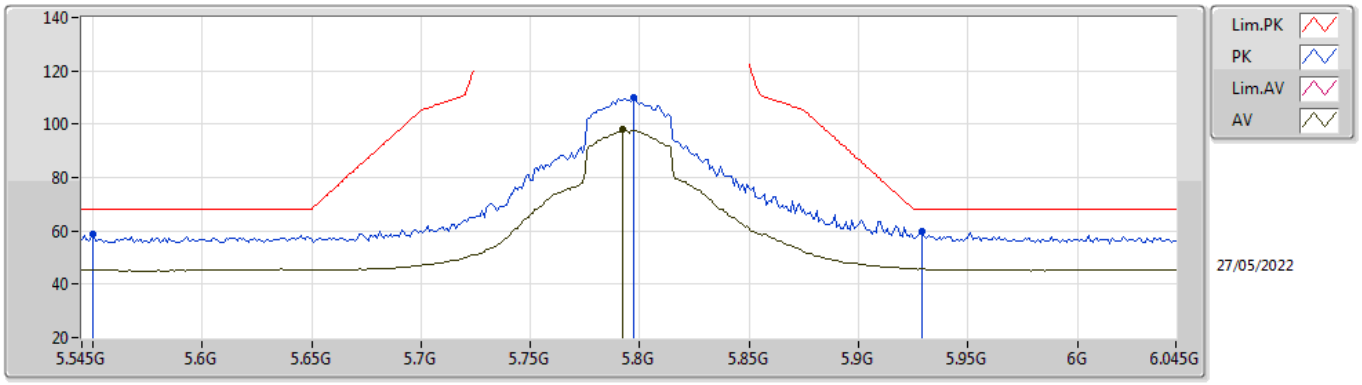


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.55G	58.79	68.20	-9.41	52.21	3	Vertical	40	1.80	-	34.60	7.35	35.37
PK	5.797G	110.06	Inf	-Inf	103.96	3	Vertical	40	1.80	-	34.20	7.40	35.50
AV	5.792G	97.95	Inf	-Inf	91.85	3	Vertical	40	1.80	-	34.20	7.40	35.50
PK	5.929G	59.92	68.20	-8.28	53.23	3	Vertical	40	1.80	-	34.72	7.53	35.56

802.11ax HEW40_Nss1,(MCS0)_1TX

5795MHz_TnomVnom

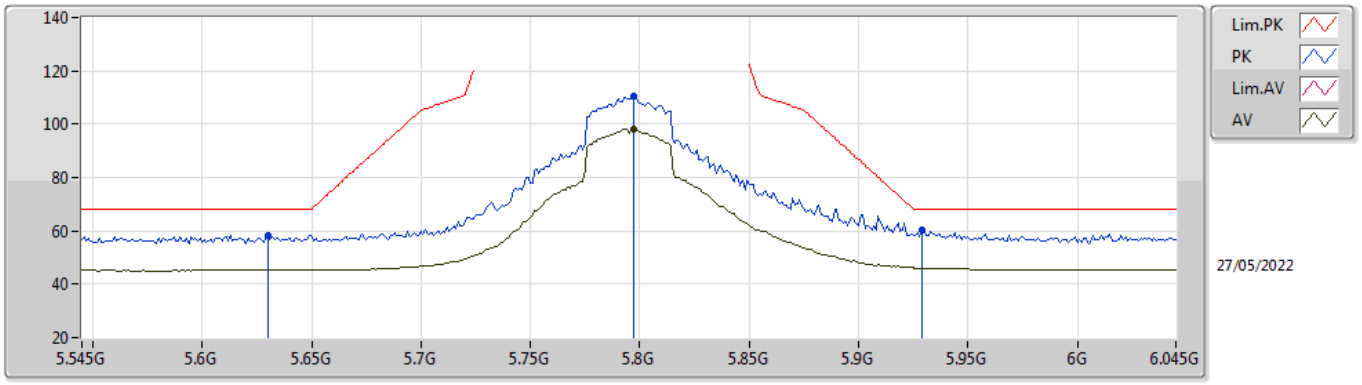


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.63G	58.16	68.20	-10.04	51.63	3	Horizontal	51	1.85	-	34.54	7.40	35.41
PK	5.797G	110.32	Inf	-Inf	104.22	3	Horizontal	51	1.85	-	34.20	7.40	35.50
AV	5.797G	98.04	Inf	-Inf	91.94	3	Horizontal	51	1.85	-	34.20	7.40	35.50
PK	5.929G	60.50	68.20	-7.70	53.81	3	Horizontal	51	1.85	-	34.72	7.53	35.56

802.11ax HEW40_Nss1,(MCS0)_1TX

5795MHz_TnomVnom

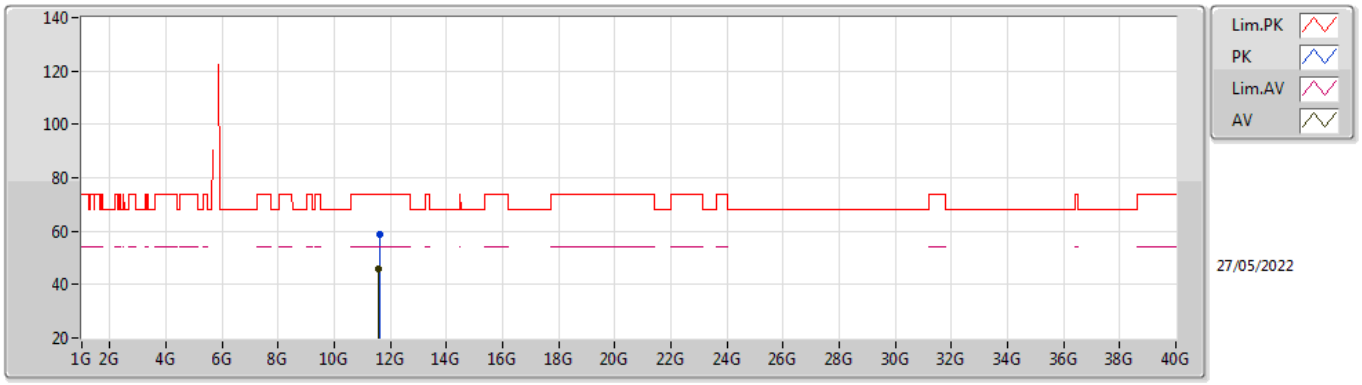


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6082G	58.91	74.00	-15.09	44.35	3	Vertical	169	2.96	-	39.40	10.74	35.58
AV	11.5951G	45.73	54.00	-8.27	31.19	3	Vertical	169	2.96	-	39.38	10.74	35.58

802.11ax HEW40_Nss1,(MCS0)_1TX

5795MHz_TnomVnom

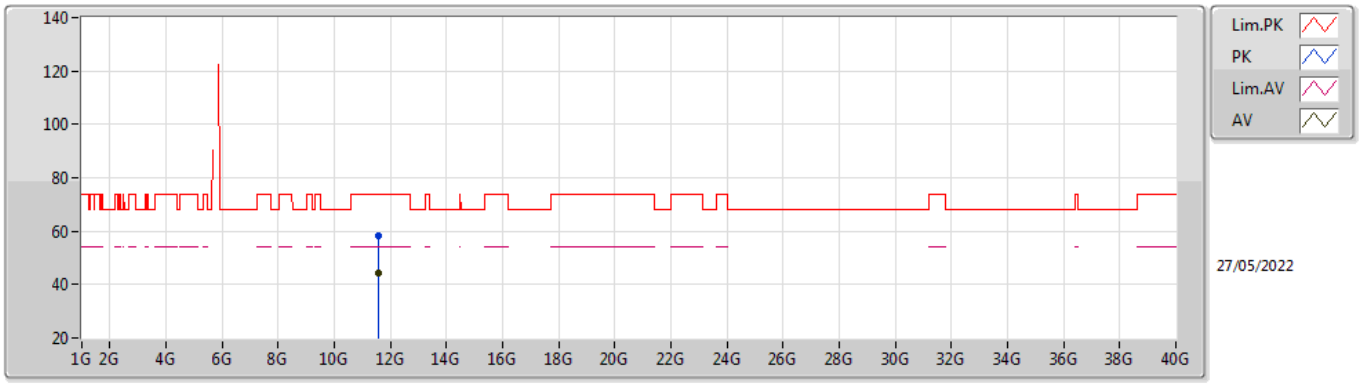


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.598G	58.10	74.00	-15.90	43.55	3	Horizontal	198	1.80	-	39.39	10.74	35.58
AV	11.5949G	44.19	54.00	-9.81	29.65	3	Horizontal	198	1.80	-	39.38	10.74	35.58

802.11ax HEW80_Nss1,(MCS0)_1TX

5210MHz_TnomVnom

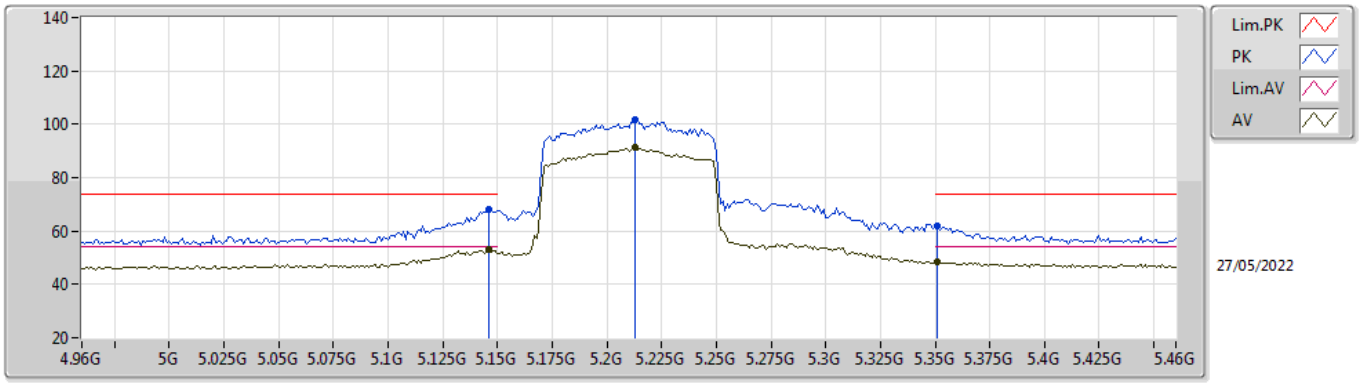


EUT Z_1TX
Setting 15.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.146G	68.12	74.00	-5.88	62.30	3	Vertical	138	1.86	-	33.99	7.17	35.34
AV	5.146G	53.18	54.00	-0.82	47.36	3	Vertical	138	1.86	-	33.99	7.17	35.34
PK	5.213G	101.77	Inf	-Inf	95.66	3	Vertical	138	1.86	-	34.25	7.20	35.34
AV	5.213G	91.41	Inf	-Inf	85.30	3	Vertical	138	1.86	-	34.25	7.20	35.34
PK	5.351G	62.12	74.00	-11.88	55.76	3	Vertical	138	1.86	-	34.50	7.20	35.34
AV	5.351G	48.67	54.00	-5.33	42.31	3	Vertical	138	1.86	-	34.50	7.20	35.34

802.11ax HEW80_Nss1,(MCS0)_1TX

5210MHz_TnomVnom

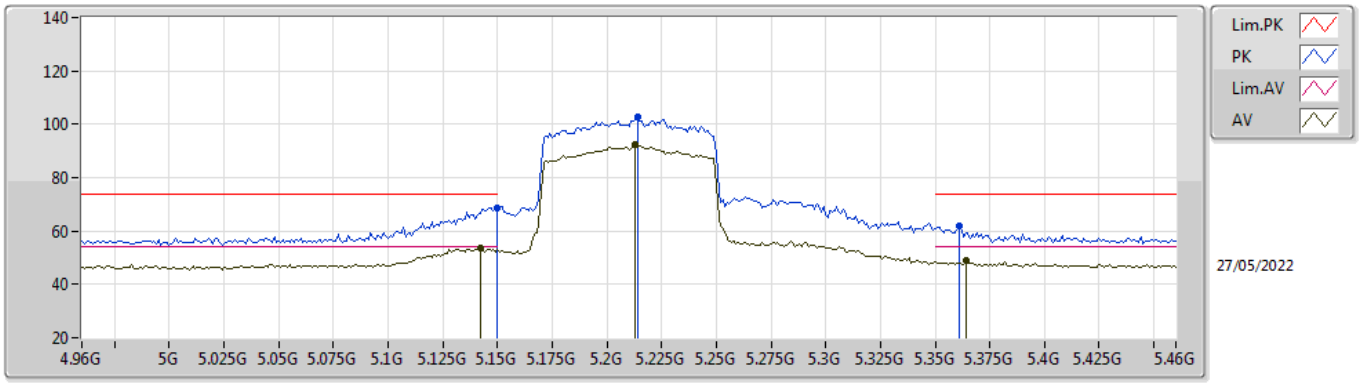


EUT Z_1TX
Setting 15.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	68.58	74.00	-5.42	62.75	3	Horizontal	112	1.92	-	34.00	7.17	35.34
AV	5.142G	53.87	54.00	-0.13	48.06	3	Horizontal	112	1.92	-	33.98	7.17	35.34
PK	5.214G	102.64	Inf	-Inf	96.52	3	Horizontal	112	1.92	-	34.26	7.20	35.34
AV	5.213G	92.26	Inf	-Inf	86.15	3	Horizontal	112	1.92	-	34.25	7.20	35.34
PK	5.361G	62.05	74.00	-11.95	55.67	3	Horizontal	112	1.92	-	34.52	7.20	35.34
AV	5.364G	48.72	54.00	-5.28	42.33	3	Horizontal	112	1.92	-	34.53	7.20	35.34

802.11ax HEW80_Nss1,(MCS0)_1TX

5210MHz_TnomVnom

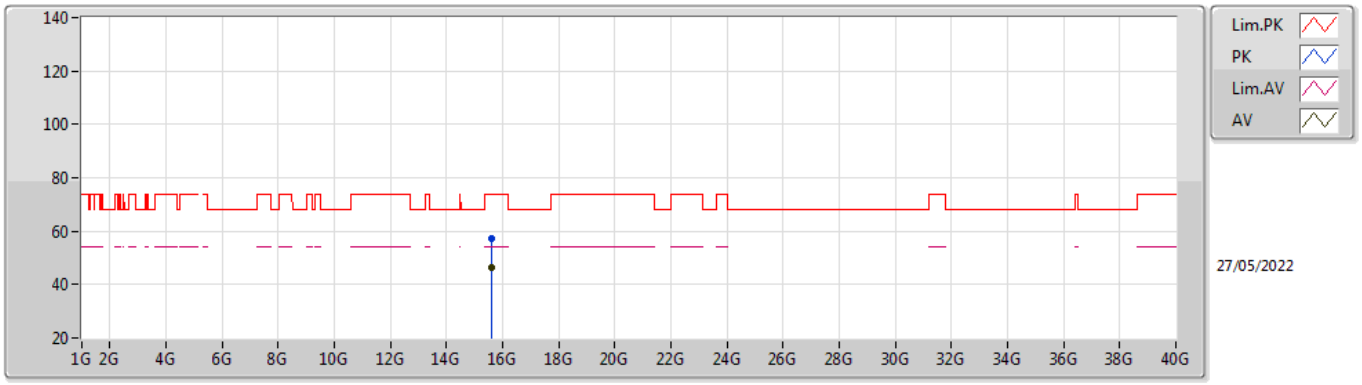


EUT X_1TX
Setting 15.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6287G	57.35	74.00	-16.65	41.76	3	Vertical	67	1.29	-	37.86	13.21	35.48
AV	15.6052G	46.60	54.00	-7.40	30.89	3	Vertical	67	1.29	-	37.97	13.20	35.46

802.11ax HEW80_Nss1,(MCS0)_1TX

5210MHz_TnomVnom

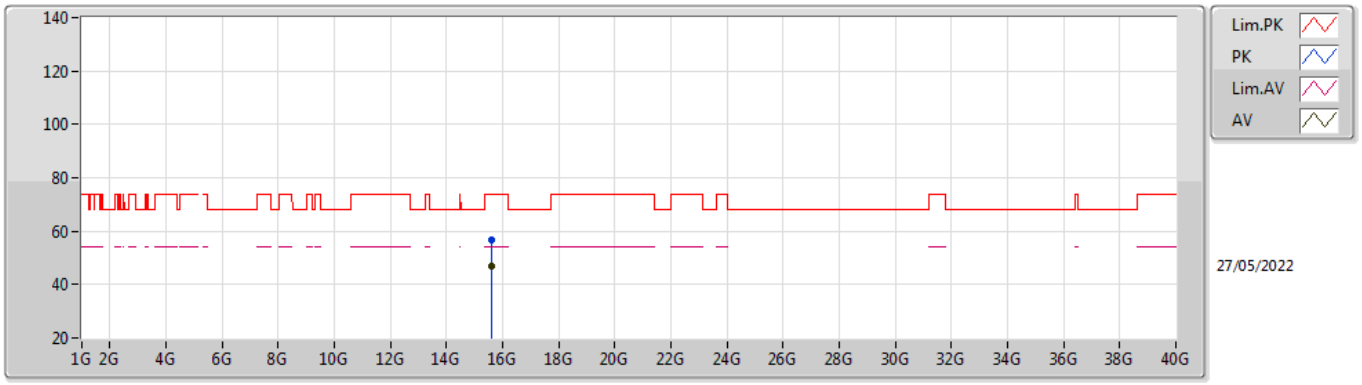


EUT X_1TX
Setting 15.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6153G	56.90	74.00	-17.10	41.24	3	Horizontal	348	2.37	-	37.92	13.21	35.47
AV	15.6065G	46.74	54.00	-7.26	31.03	3	Horizontal	348	2.37	-	37.97	13.20	35.46

802.11ax HEW80_Nss1,(MCS0)_1TX

5290MHz_TnomVnom

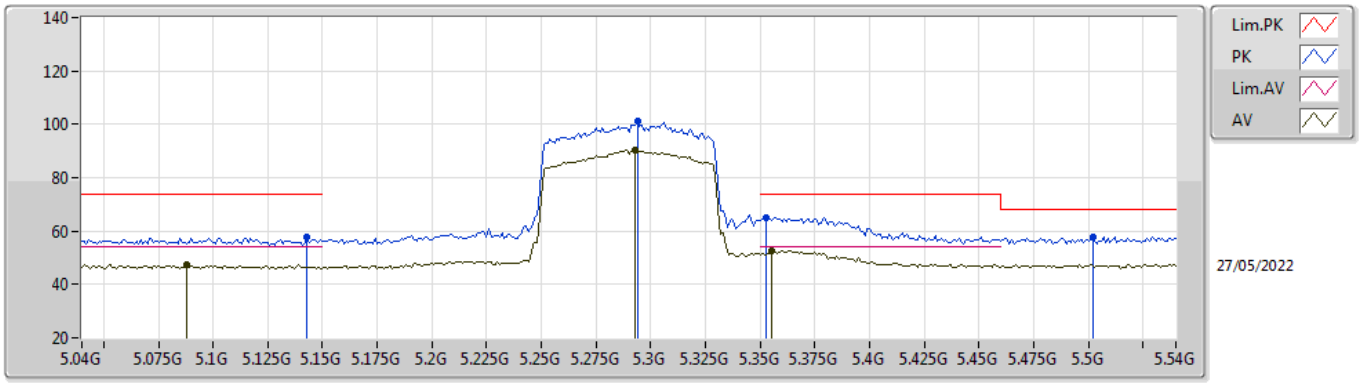


EUT Z_1TX
Setting 13.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.143G	57.86	74.00	-16.14	52.04	3	Vertical	136	1.80	-	33.99	7.17	35.34
AV	5.088G	47.49	54.00	-6.51	41.80	3	Vertical	136	1.80	-	33.88	7.14	35.33
PK	5.294G	101.02	Inf	-Inf	94.67	3	Vertical	136	1.80	-	34.49	7.20	35.34
AV	5.293G	90.35	Inf	-Inf	84.00	3	Vertical	136	1.80	-	34.49	7.20	35.34
PK	5.353G	65.25	74.00	-8.75	58.88	3	Vertical	136	1.80	-	34.51	7.20	35.34
AV	5.355G	52.83	54.00	-1.17	46.46	3	Vertical	136	1.80	-	34.51	7.20	35.34
PK	5.502G	57.79	68.20	-10.41	51.24	3	Vertical	136	1.80	-	34.60	7.30	35.35

802.11ax HEW80_Nss1,(MCS0)_1TX

5290MHz_TnomVnom

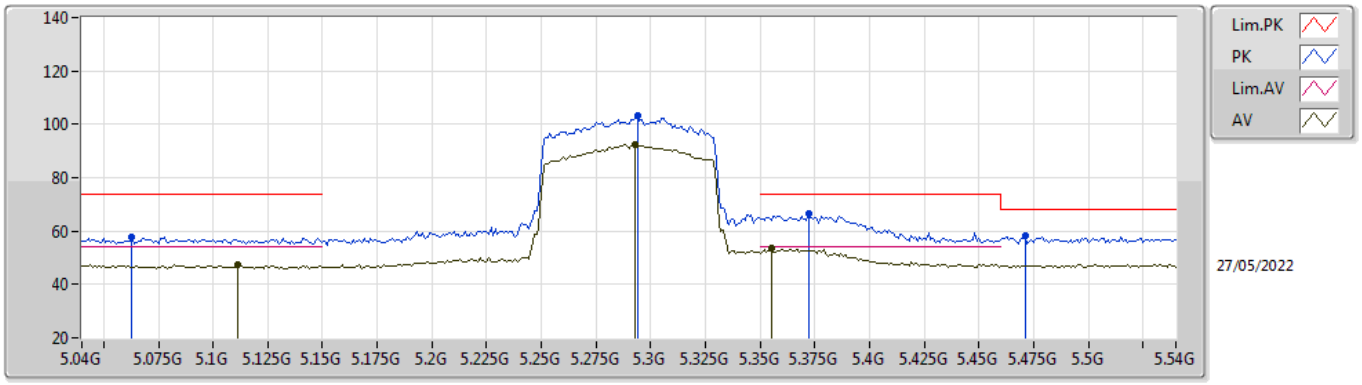


EUT Z_1TX
Setting 13.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.063G	57.89	74.00	-16.11	52.26	3	Horizontal	110	2.00	-	33.83	7.13	35.33
AV	5.111G	47.44	54.00	-6.56	41.69	3	Horizontal	110	2.00	-	33.92	7.16	35.33
PK	5.294G	103.02	Inf	-Inf	96.67	3	Horizontal	110	2.00	-	34.49	7.20	35.34
AV	5.293G	92.48	Inf	-Inf	86.13	3	Horizontal	110	2.00	-	34.49	7.20	35.34
PK	5.372G	66.66	74.00	-7.34	60.26	3	Horizontal	110	2.00	-	34.54	7.20	35.34
AV	5.355G	53.44	54.00	-0.56	47.07	3	Horizontal	110	2.00	-	34.51	7.20	35.34
PK	5.471G	58.13	68.20	-10.07	51.67	3	Horizontal	110	2.00	-	34.54	7.27	35.35

802.11ax HEW80_Nss1,(MCS0)_1TX

5290MHz_TnomVnom

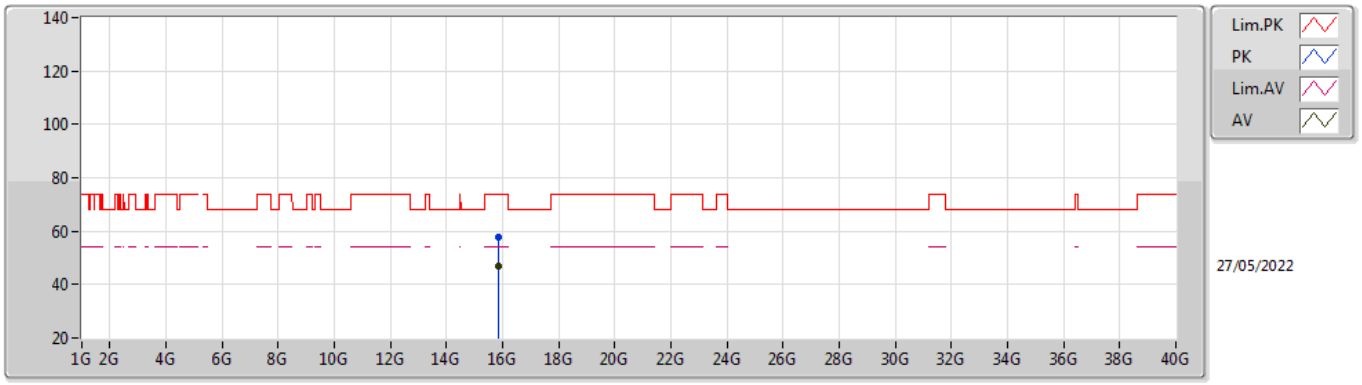


EUT X_1TX
Setting 13.75
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.855G	57.64	74.00	-16.36	42.25	3	Vertical	230	2.36	-	37.73	13.33	35.67
AV	15.854G	46.86	54.00	-7.14	31.46	3	Vertical	230	2.36	-	37.74	13.33	35.67

802.11ax HEW80_Nss1,(MCS0)_1TX

5290MHz_TnomVnom

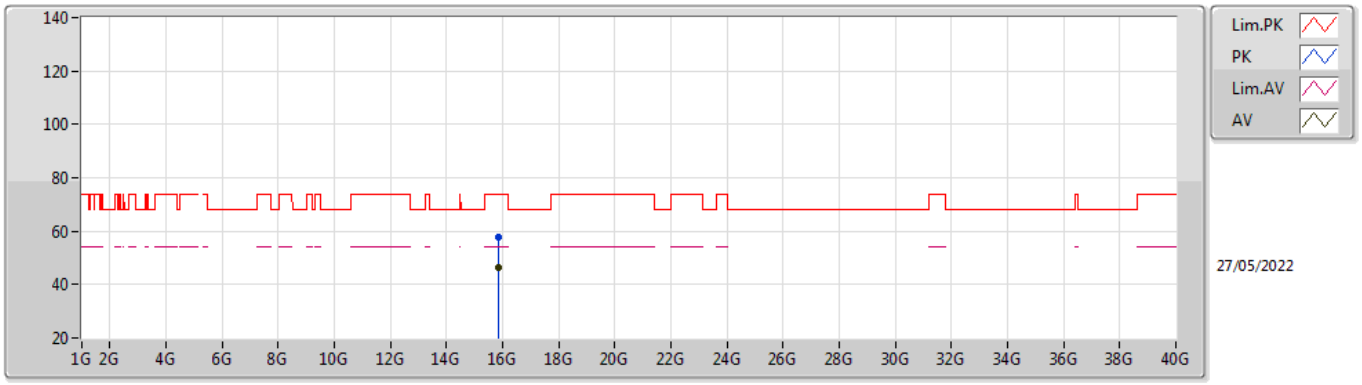


EUT X_1TX
Setting 13.75
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.8561G	57.98	74.00	-16.02	42.59	3	Horizontal	37	2.29	-	37.73	13.33	35.67
AV	15.8568G	46.62	54.00	-7.38	31.23	3	Horizontal	37	2.29	-	37.73	13.33	35.67

802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TnomVnom

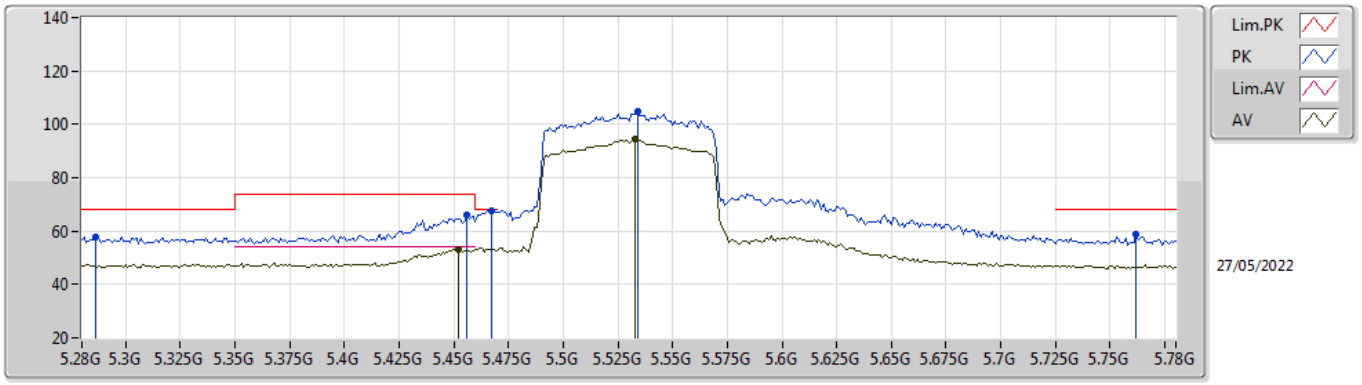


EUT Z_1TX
Setting 15.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.286G	57.77	68.20	-10.43	51.44	3	Vertical	38	2.18	-	34.47	7.20	35.34
PK	5.456G	66.01	74.00	-7.99	59.59	3	Vertical	38	2.18	-	34.51	7.26	35.35
AV	5.452G	53.30	54.00	-0.70	46.90	3	Vertical	38	2.18	-	34.50	7.25	35.35
PK	5.467G	67.70	68.20	-0.50	61.25	3	Vertical	38	2.18	-	34.53	7.27	35.35
PK	5.534G	104.77	Inf	-Inf	98.21	3	Vertical	38	2.18	-	34.60	7.33	35.37
AV	5.533G	94.28	Inf	-Inf	87.72	3	Vertical	38	2.18	-	34.60	7.33	35.37
PK	5.762G	58.78	68.20	-9.42	52.66	3	Vertical	38	2.18	-	34.20	7.40	35.48

802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TnomVnom

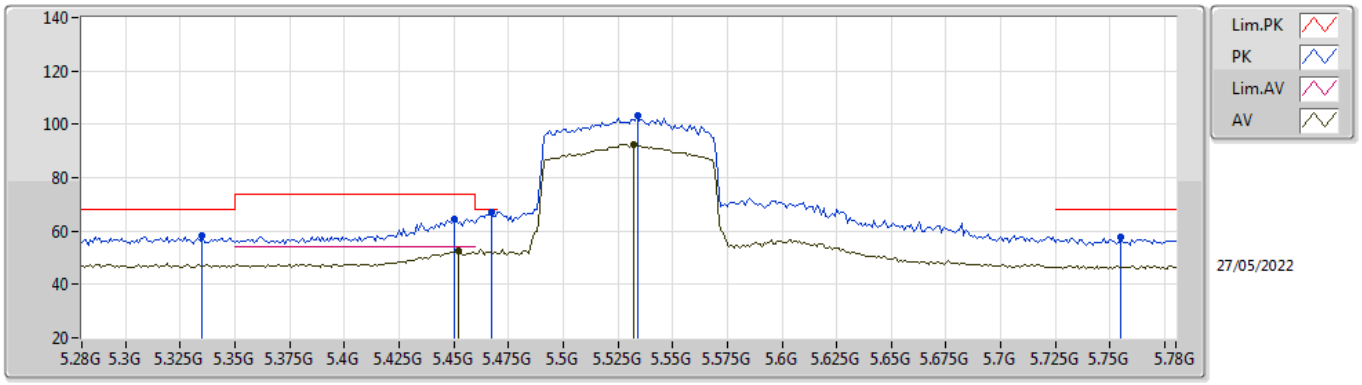


EUT Z_1TX
Setting 15.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.335G	58.02	68.20	-10.18	51.66	3	Horizontal	57	1.80	-	34.50	7.20	35.34
PK	5.45G	64.70	74.00	-9.30	58.30	3	Horizontal	57	1.80	-	34.50	7.25	35.35
AV	5.452G	52.80	54.00	-1.20	46.40	3	Horizontal	57	1.80	-	34.50	7.25	35.35
PK	5.467G	67.19	68.20	-1.01	60.74	3	Horizontal	57	1.80	-	34.53	7.27	35.35
PK	5.534G	103.13	Inf	-Inf	96.57	3	Horizontal	57	1.80	-	34.60	7.33	35.37
AV	5.532G	92.57	Inf	-Inf	86.01	3	Horizontal	57	1.80	-	34.60	7.33	35.37
PK	5.755G	57.60	68.20	-10.60	51.48	3	Horizontal	57	1.80	-	34.20	7.40	35.48

802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TnomVnom

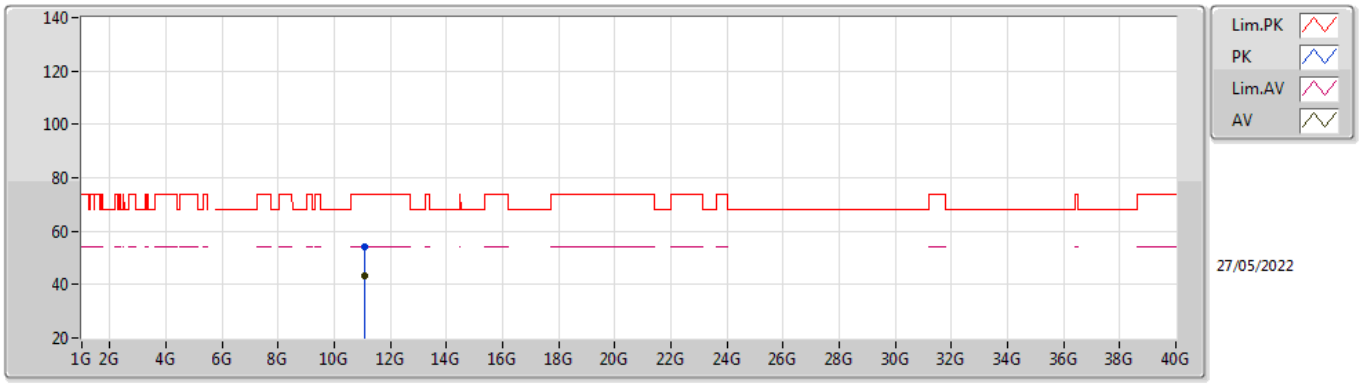


EUT X_1TX
Setting 15.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0693G	54.37	74.00	-19.63	40.36	3	Vertical	106	2.82	-	38.47	10.66	35.12
AV	11.0599G	43.39	54.00	-10.61	29.38	3	Vertical	106	2.82	-	38.46	10.66	35.11

802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TnomVnom

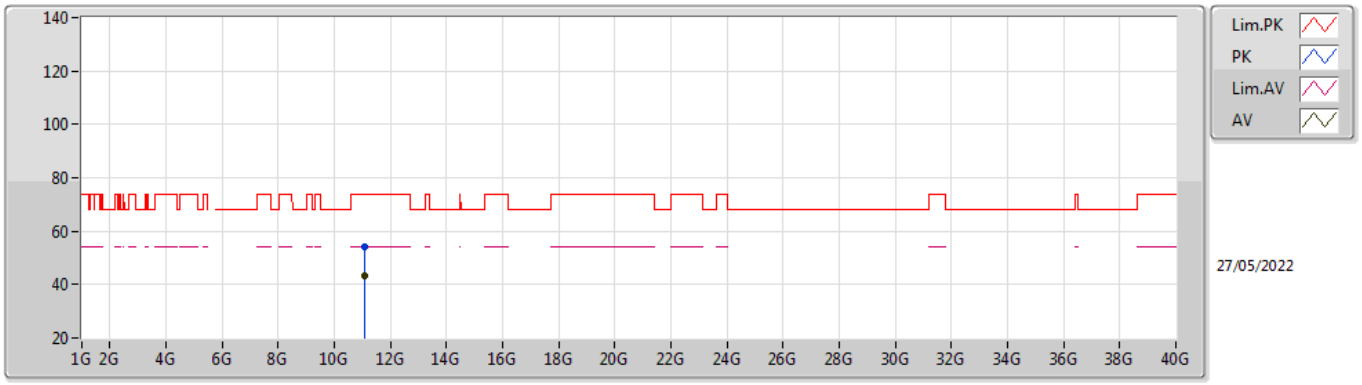


EUT X_1TX
Setting 15.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0658G	54.10	74.00	-19.90	40.08	3	Horizontal	337	2.65	-	38.47	10.66	35.11
AV	11.0612G	43.25	54.00	-10.75	29.24	3	Horizontal	337	2.65	-	38.46	10.66	35.11

802.11ax HEW80_Nss1,(MCS0)_1TX

5610MHz_TnomVnom

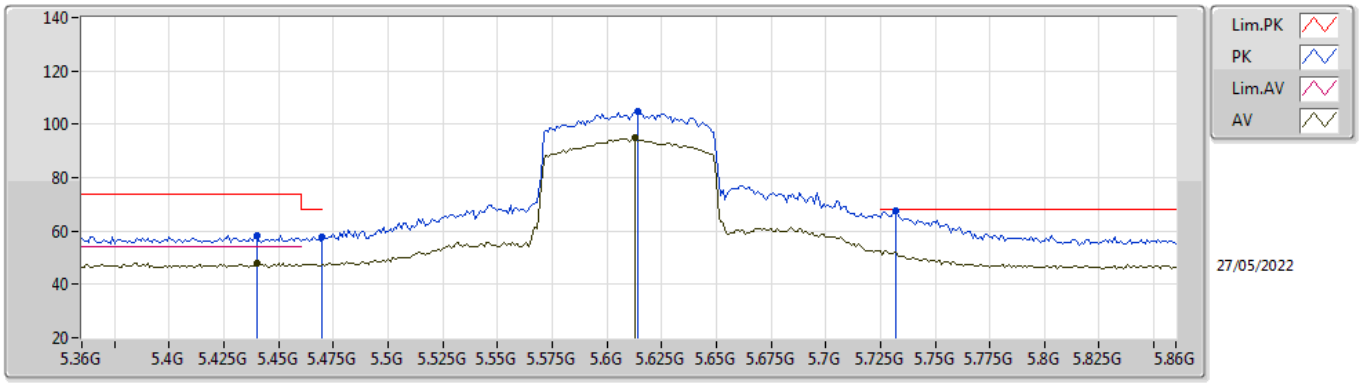


EUT Z_1TX
Setting 15
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.44G	58.40	74.00	-15.60	51.99	3	Vertical	42	2.13	-	34.52	7.24	35.35
AV	5.44G	47.93	54.00	-6.07	41.52	3	Vertical	42	2.13	-	34.52	7.24	35.35
PK	5.47G	58.00	68.20	-10.20	51.54	3	Vertical	42	2.13	-	34.54	7.27	35.35
PK	5.614G	104.71	Inf	-Inf	98.15	3	Vertical	42	2.13	-	34.57	7.40	35.41
AV	5.613G	94.93	Inf	-Inf	88.37	3	Vertical	42	2.13	-	34.57	7.40	35.41
PK	5.732G	67.33	68.20	-0.87	61.16	3	Vertical	42	2.13	-	34.24	7.40	35.47

802.11ax HEW80_Nss1,(MCS0)_1TX

5610MHz_TnomVnom

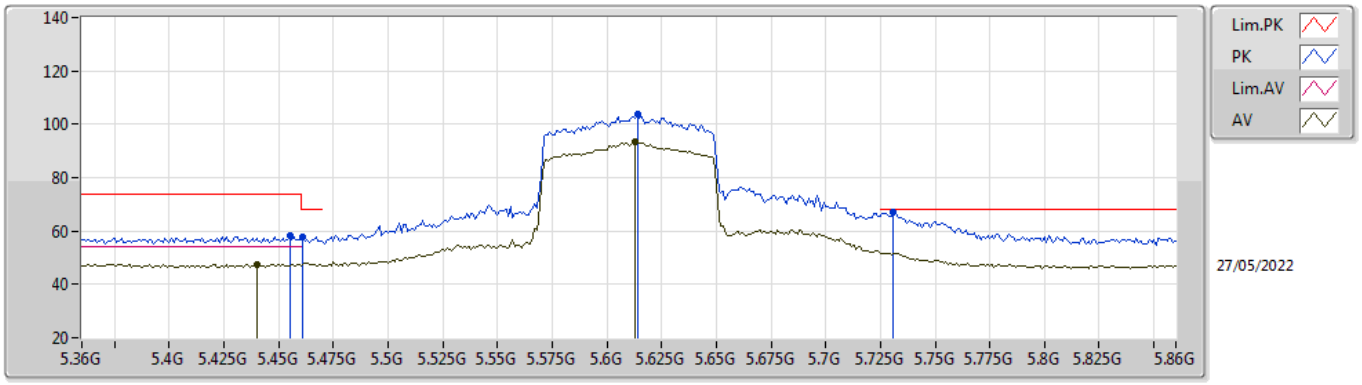


EUT Z_1TX
Setting 15
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.455G	58.53	74.00	-15.47	52.12	3	Horizontal	52	1.92	-	34.51	7.25	35.35
AV	5.44G	47.57	54.00	-6.43	41.16	3	Horizontal	52	1.92	-	34.52	7.24	35.35
PK	5.461G	57.96	68.20	-10.24	51.53	3	Horizontal	52	1.92	-	34.52	7.26	35.35
PK	5.614G	103.90	Inf	-Inf	97.34	3	Horizontal	52	1.92	-	34.57	7.40	35.41
AV	5.613G	93.36	Inf	-Inf	86.80	3	Horizontal	52	1.92	-	34.57	7.40	35.41
PK	5.731G	67.22	68.20	-0.98	61.05	3	Horizontal	52	1.92	-	34.24	7.40	35.47

802.11ax HEW80_Nss1,(MCS0)_1TX

5610MHz_TnomVnom

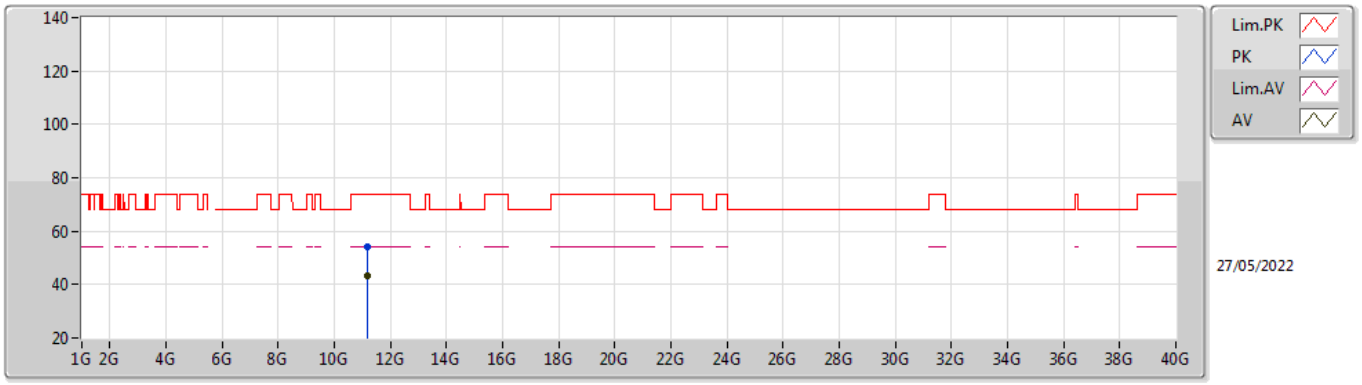


EUT X_1TX
Setting 15
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1953G	53.92	74.00	-20.08	39.90	3	Vertical	298	2.36	-	38.60	10.68	35.26
AV	11.1952G	43.34	54.00	-10.66	29.32	3	Vertical	298	2.36	-	38.60	10.68	35.26

802.11ax HEW80_Nss1,(MCS0)_1TX

5610MHz_TnomVnom

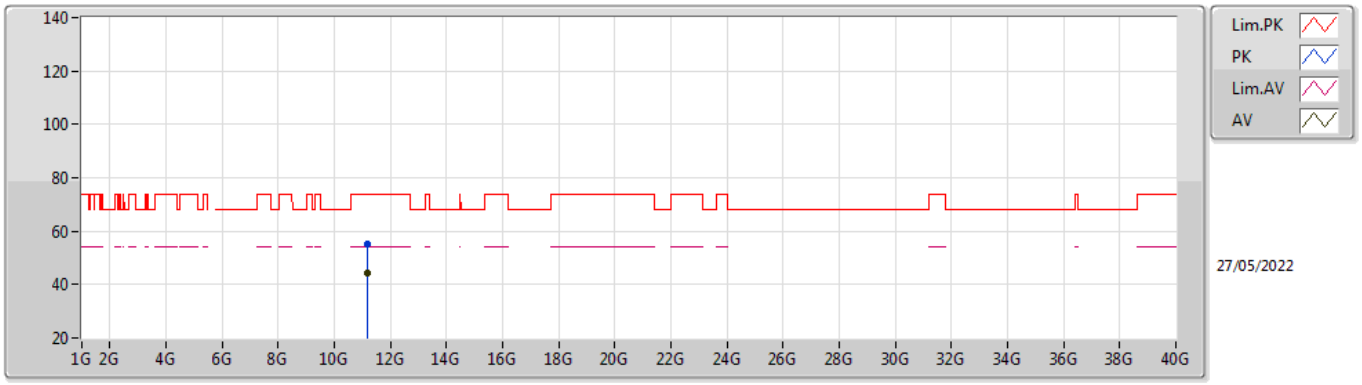


EUT X_1TX
Setting 15
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.2039G	54.97	74.00	-19.03	40.96	3	Horizontal	178	2.99	-	38.60	10.68	35.27
AV	11.2036G	44.27	54.00	-9.73	30.26	3	Horizontal	178	2.99	-	38.60	10.68	35.27

802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

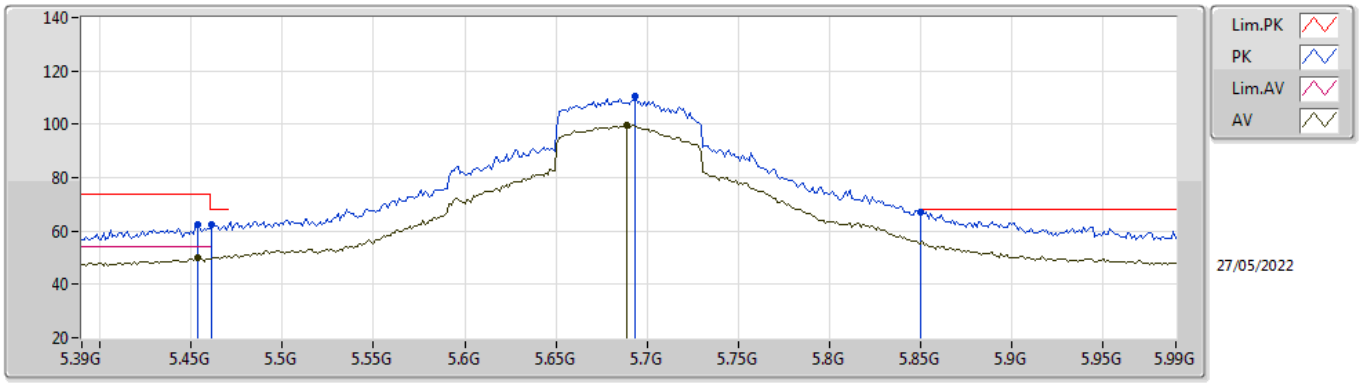


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4536G	62.19	74.00	-11.81	55.78	3	Vertical	37	1.90	-	34.51	7.25	35.35
AV	5.4536G	49.93	54.00	-4.07	43.52	3	Vertical	37	1.90	-	34.51	7.25	35.35
PK	5.4608G	62.23	68.20	-5.97	55.80	3	Vertical	37	1.90	-	34.52	7.26	35.35
PK	5.6936G	110.38	Inf	-Inf	104.10	3	Vertical	37	1.90	-	34.33	7.40	35.45
AV	5.6888G	99.42	Inf	-Inf	93.12	3	Vertical	37	1.90	-	34.34	7.40	35.44
PK	5.85G	67.00	68.20	-1.20	60.78	3	Vertical	37	1.90	-	34.30	7.45	35.53

802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

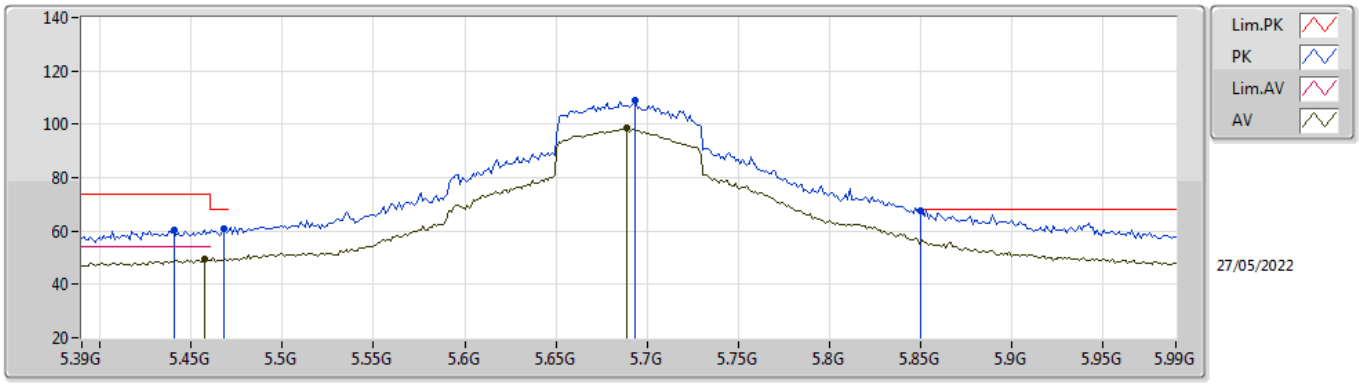


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4404G	60.36	74.00	-13.64	53.95	3	Horizontal	53	1.92	-	34.52	7.24	35.35
PK	5.468G	60.70	68.20	-7.50	54.24	3	Horizontal	53	1.92	-	34.54	7.27	35.35
AV	5.4572G	49.44	54.00	-4.56	43.02	3	Horizontal	53	1.92	-	34.51	7.26	35.35
PK	5.6936G	108.72	Inf	-Inf	102.44	3	Horizontal	53	1.92	-	34.33	7.40	35.45
AV	5.6888G	98.50	Inf	-Inf	92.20	3	Horizontal	53	1.92	-	34.34	7.40	35.44
PK	5.85G	67.78	68.20	-0.42	61.56	3	Horizontal	53	1.92	-	34.30	7.45	35.53

802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

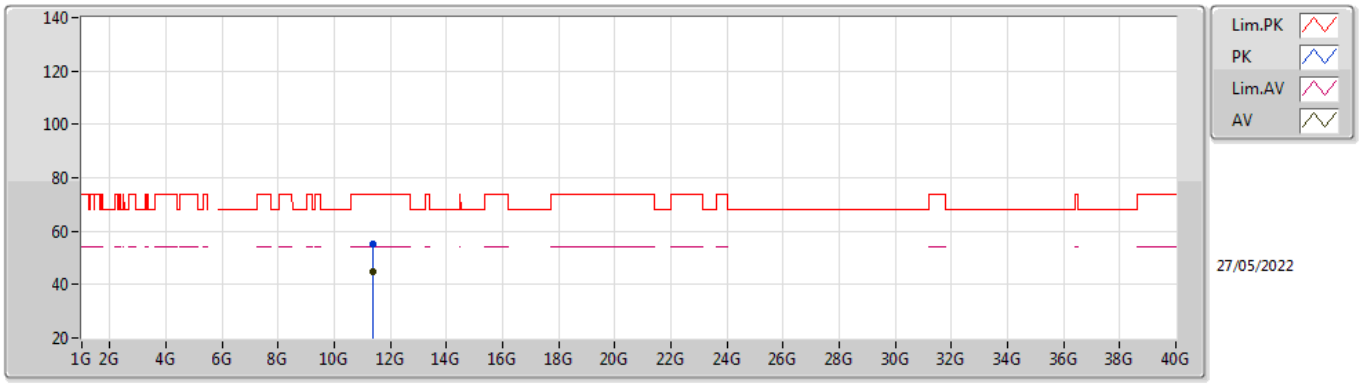


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.3964G	55.38	74.00	-18.62	41.35	3	Vertical	147	2.85	-	38.80	10.71	35.48
AV	11.3694G	44.79	54.00	-9.21	30.76	3	Vertical	147	2.85	-	38.77	10.71	35.45

802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

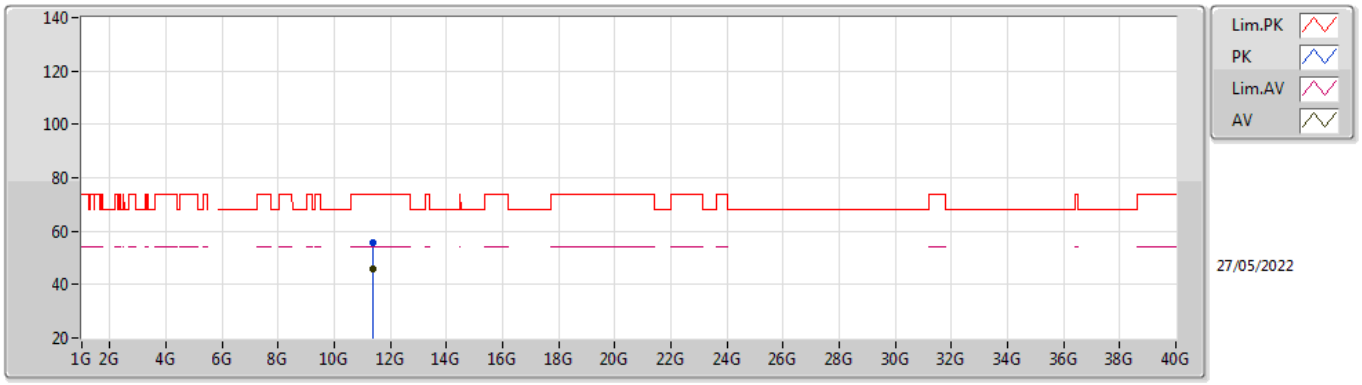


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.3757G	55.82	74.00	-18.18	41.79	3	Horizontal	251	1.77	-	38.78	10.71	35.46
AV	11.3828G	46.07	54.00	-7.93	32.05	3	Horizontal	251	1.77	-	38.78	10.71	35.47

802.11ax HEW80_Nss1,(MCS0)_1TX

5775MHz_TnomVnom

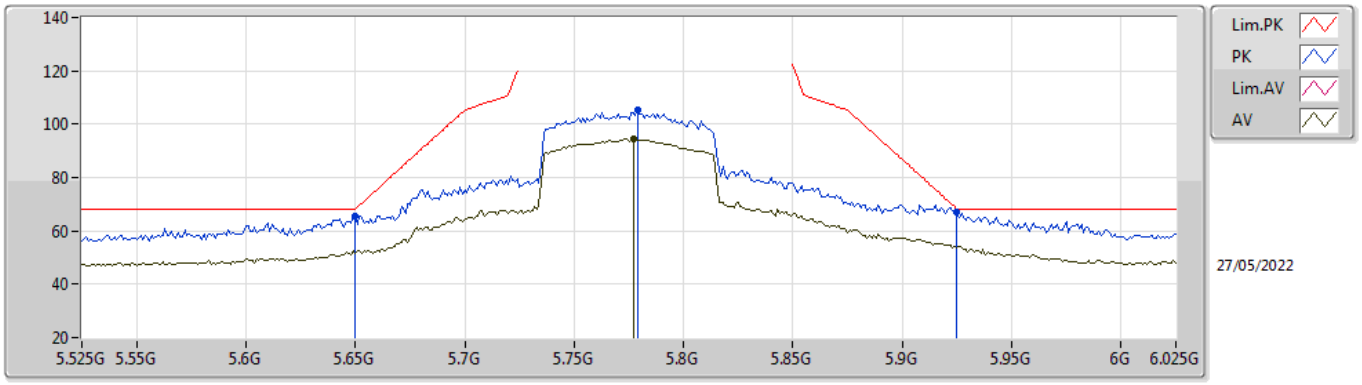


EUT Z_1TX
Setting 18.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.65G	65.46	68.20	-2.74	58.99	3	Vertical	189	1.86	-	34.50	7.40	35.43
PK	5.779G	105.22	Inf	-Inf	99.11	3	Vertical	189	1.86	-	34.20	7.40	35.49
AV	5.777G	94.74	Inf	-Inf	88.63	3	Vertical	189	1.86	-	34.20	7.40	35.49
PK	5.925G	66.90	68.20	-1.30	60.23	3	Vertical	189	1.86	-	34.70	7.53	35.56

802.11ax HEW80_Nss1,(MCS0)_1TX

5775MHz_TnomVnom

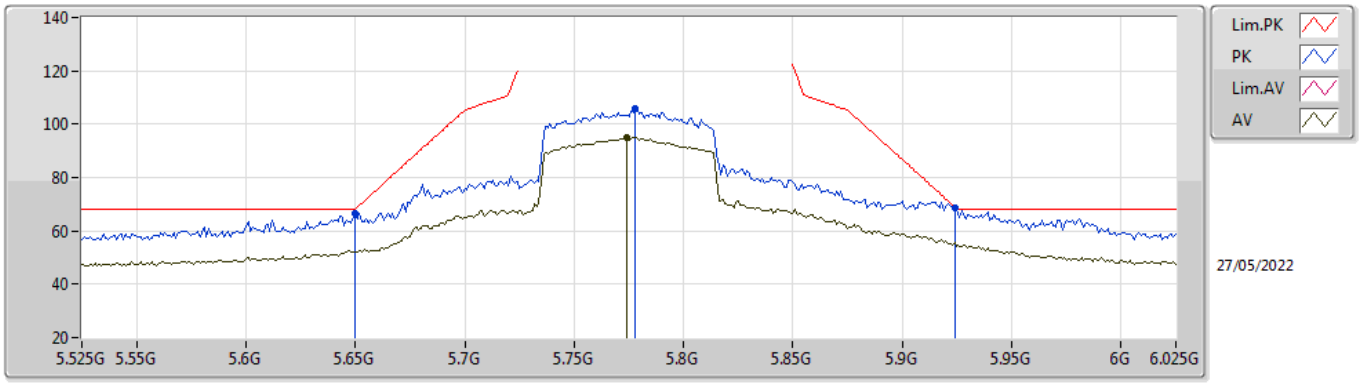


EUT Z_1TX
Setting 18.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.65G	66.30	68.20	-1.90	59.83	3	Horizontal	51	1.87	-	34.50	7.40	35.43
PK	5.778G	105.63	Inf	-Inf	99.52	3	Horizontal	51	1.87	-	34.20	7.40	35.49
AV	5.774G	95.01	Inf	-Inf	88.90	3	Horizontal	51	1.87	-	34.20	7.40	35.49
PK	5.924G	68.79	68.94	-0.15	62.13	3	Horizontal	51	1.87	-	34.70	7.52	35.56

802.11ax HEW80_Nss1,(MCS0)_1TX

5775MHz_TnomVnom

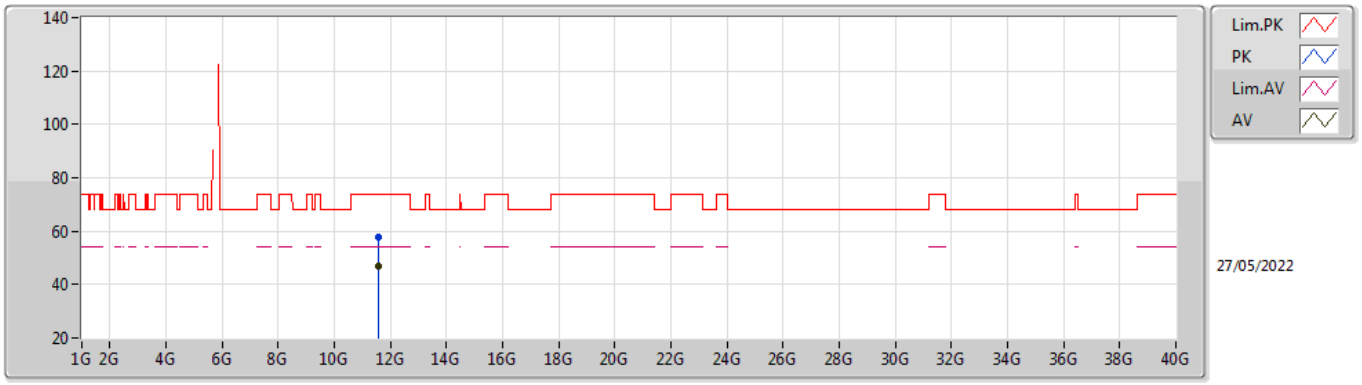


EUT X_1TX
Setting 18.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.562G	57.59	74.00	-16.41	43.20	3	Vertical	172	2.97	-	39.25	10.73	35.59
AV	11.5675G	46.75	54.00	-7.25	32.33	3	Vertical	172	2.97	-	39.27	10.74	35.59

802.11ax HEW80_Nss1,(MCS0)_1TX

5775MHz_TnomVnom

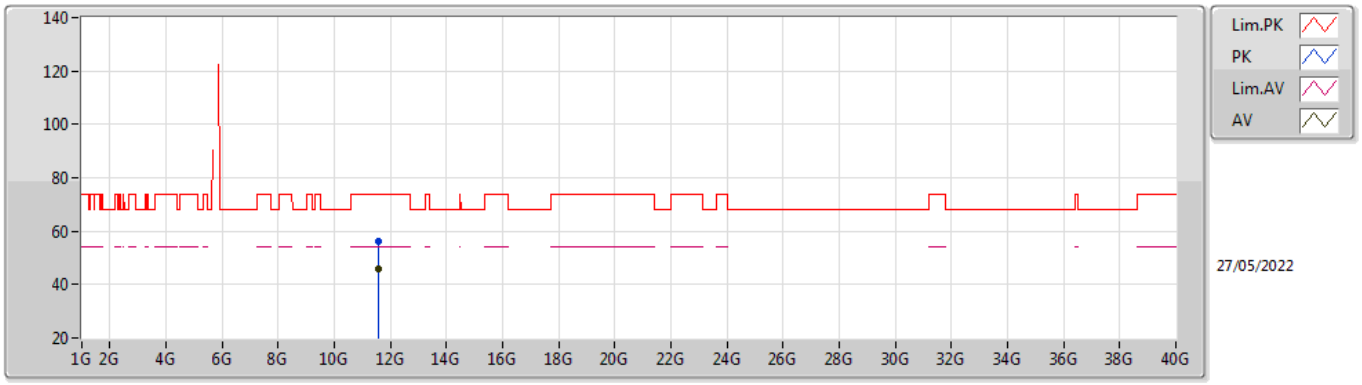


EUT X_1TX
Setting 18.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5712G	56.14	74.00	-17.86	41.70	3	Horizontal	192	2.08	-	39.28	10.74	35.58
AV	11.5712G	45.94	54.00	-8.06	31.50	3	Horizontal	192	2.08	-	39.28	10.74	35.58

802.11ax HEW160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

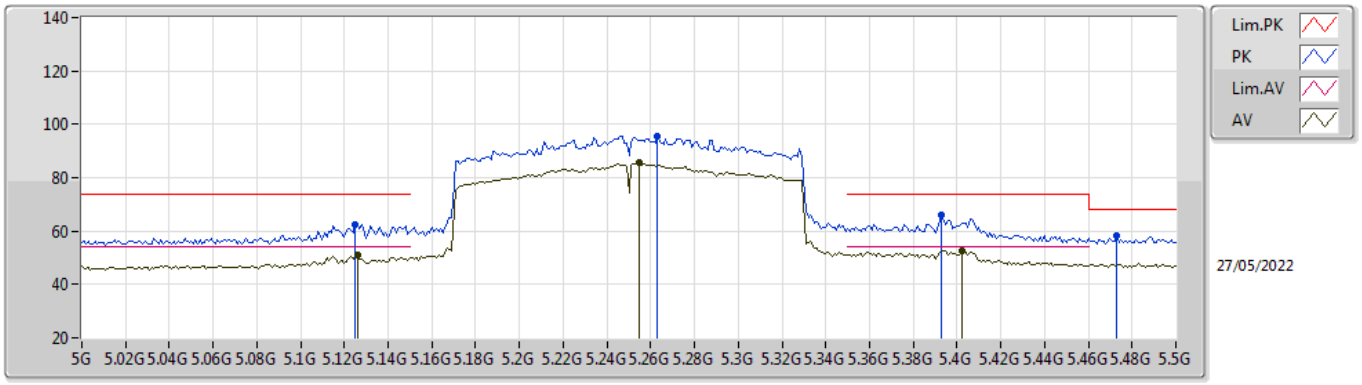


EUT Z_1TX
Setting 12
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.125G	62.56	74.00	-11.44	56.79	3	Vertical	138	1.80	-	33.95	7.16	35.34
AV	5.126G	51.02	54.00	-2.98	45.25	3	Vertical	138	1.80	-	33.95	7.16	35.34
PK	5.263G	95.46	Inf	-Inf	89.17	3	Vertical	138	1.80	-	34.43	7.20	35.34
AV	5.255G	85.50	Inf	-Inf	79.23	3	Vertical	138	1.80	-	34.41	7.20	35.34
PK	5.393G	66.14	74.00	-7.86	59.70	3	Vertical	138	1.80	-	34.59	7.20	35.35
AV	5.402G	52.76	54.00	-1.24	46.31	3	Vertical	138	1.80	-	34.60	7.20	35.35
PK	5.473G	58.29	68.20	-9.91	51.82	3	Vertical	138	1.80	-	34.55	7.27	35.35

802.11ax HEW160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

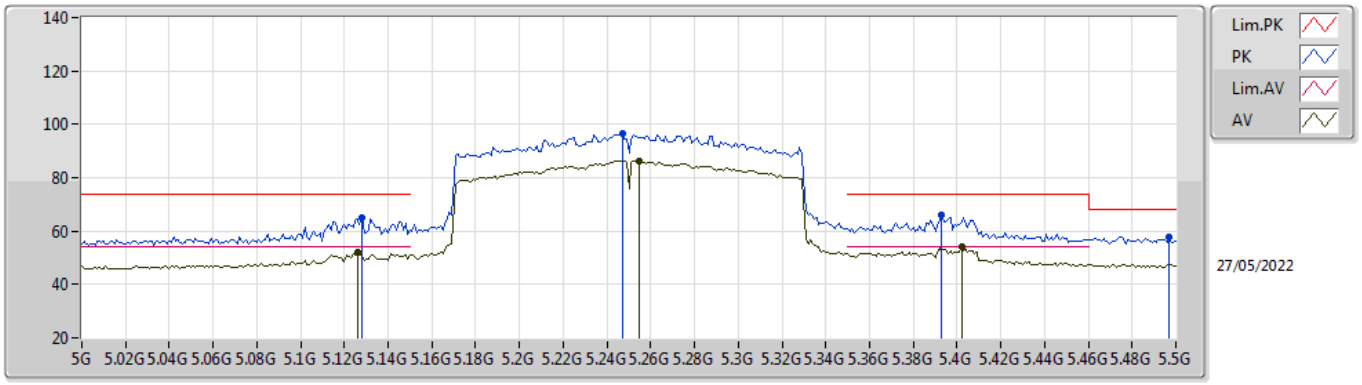


EUT Z_1TX
Setting 12
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.128G	64.75	74.00	-9.25	58.97	3	Horizontal	111	1.98	-	33.96	7.16	35.34
AV	5.126G	51.94	54.00	-2.06	46.17	3	Horizontal	111	1.98	-	33.95	7.16	35.34
PK	5.247G	96.78	Inf	-Inf	90.53	3	Horizontal	111	1.98	-	34.39	7.20	35.34
AV	5.255G	86.46	Inf	-Inf	80.19	3	Horizontal	111	1.98	-	34.41	7.20	35.34
PK	5.393G	66.26	74.00	-7.74	59.82	3	Horizontal	111	1.98	-	34.59	7.20	35.35
AV	5.402G	53.90	54.00	-0.10	47.45	3	Horizontal	111	1.98	-	34.60	7.20	35.35
PK	5.497G	57.65	68.20	-10.55	51.11	3	Horizontal	111	1.98	-	34.59	7.30	35.35

802.11ax HEW160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

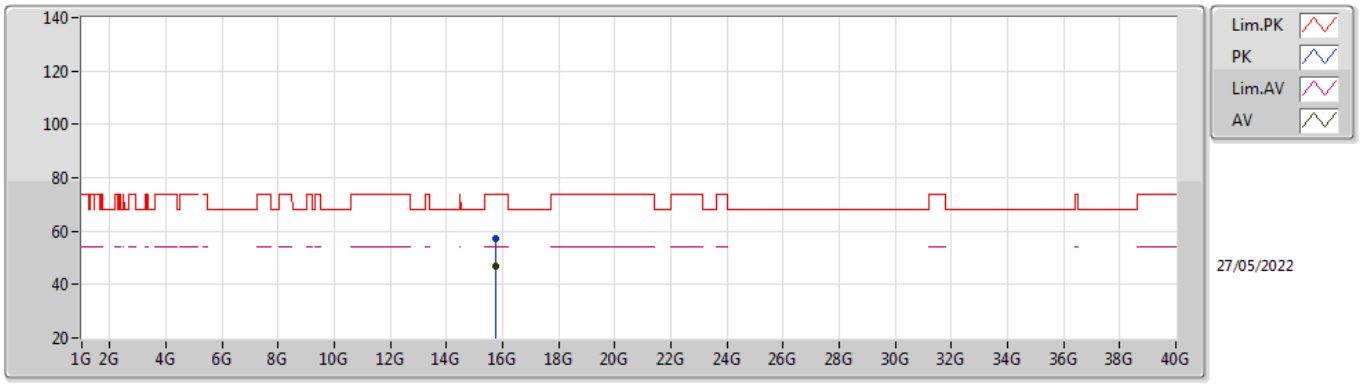


EUT X_1TX
Setting 12
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7377G	57.37	74.00	-16.63	42.02	3	Vertical	356	2.93	-	37.65	13.27	35.57
AV	15.76074G	46.77	54.00	-7.23	31.34	3	Vertical	356	2.93	-	37.74	13.28	35.59

802.11ax HEW160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

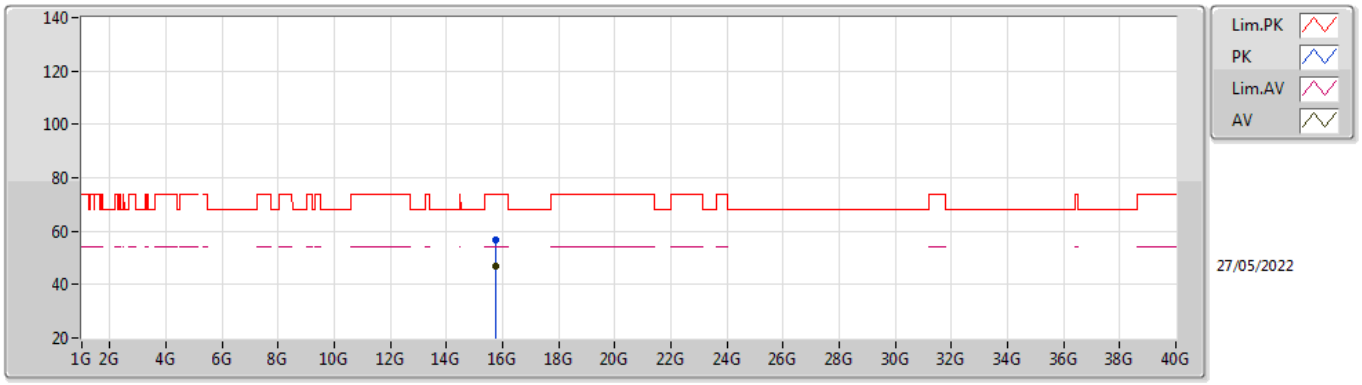


EUT X_1TX
Setting 12
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.76164G	56.71	74.00	-17.29	41.27	3	Horizontal	343	2.32	-	37.75	13.28	35.59
AV	15.76266G	46.85	54.00	-7.15	31.41	3	Horizontal	343	2.32	-	37.75	13.28	35.59

802.11ax HEW160_Nss1,(MCS0)_1TX

5570MHz_TnomVnom

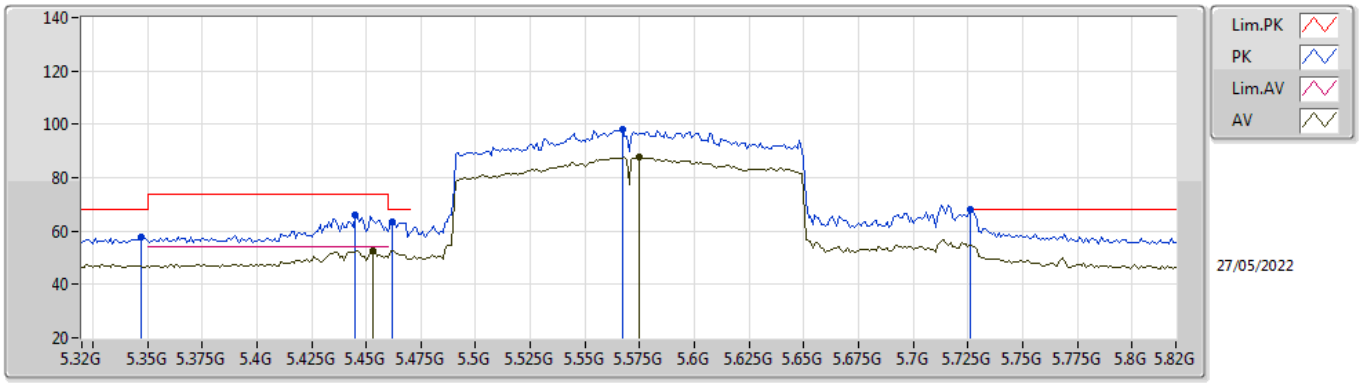


EUT Z_1TX
Setting 11.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.347G	57.58	68.20	-10.62	51.22	3	Vertical	38	2.09	-	34.50	7.20	35.34
PK	5.445G	65.84	74.00	-8.16	59.43	3	Vertical	38	2.09	-	34.51	7.25	35.35
AV	5.453G	52.54	54.00	-1.46	46.13	3	Vertical	38	2.09	-	34.51	7.25	35.35
PK	5.462G	63.57	68.20	-4.63	57.14	3	Vertical	38	2.09	-	34.52	7.26	35.35
PK	5.567G	98.00	Inf	-Inf	91.41	3	Vertical	38	2.09	-	34.60	7.37	35.38
AV	5.575G	87.84	Inf	-Inf	81.26	3	Vertical	38	2.09	-	34.60	7.37	35.39
PK	5.726G	68.02	68.20	-0.18	61.83	3	Vertical	38	2.09	-	34.25	7.40	35.46

802.11ax HEW160_Nss1,(MCS0)_1TX

5570MHz_TnomVnom

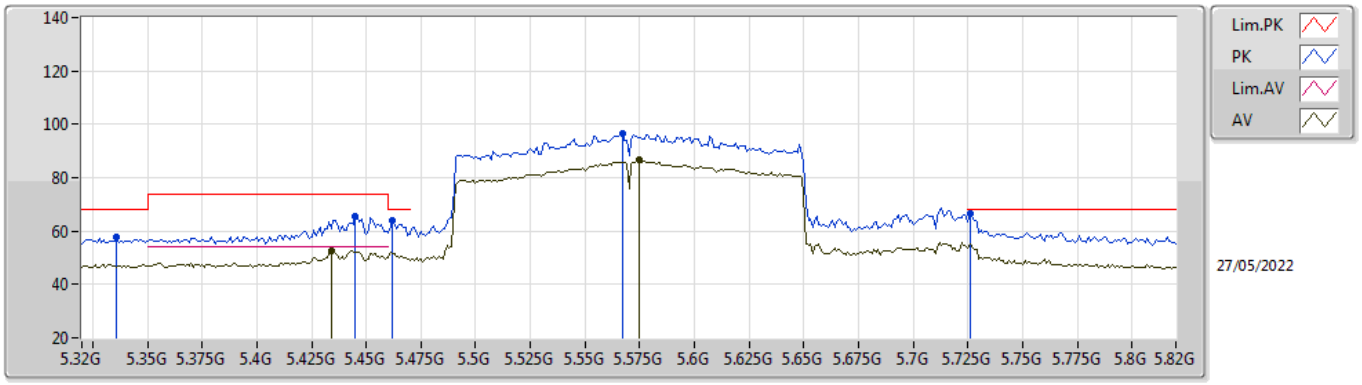


EUT Z_1TX
Setting 11.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.336G	57.87	68.20	-10.33	51.51	3	Horizontal	54	1.86	-	34.50	7.20	35.34
PK	5.445G	65.70	74.00	-8.30	59.29	3	Horizontal	54	1.86	-	34.51	7.25	35.35
AV	5.434G	52.67	54.00	-1.33	46.26	3	Horizontal	54	1.86	-	34.53	7.23	35.35
PK	5.462G	64.07	68.20	-4.13	57.64	3	Horizontal	54	1.86	-	34.52	7.26	35.35
PK	5.567G	96.35	Inf	-Inf	89.76	3	Horizontal	54	1.86	-	34.60	7.37	35.38
AV	5.575G	86.53	Inf	-Inf	79.95	3	Horizontal	54	1.86	-	34.60	7.37	35.39
PK	5.726G	66.45	68.20	-1.75	60.26	3	Horizontal	54	1.86	-	34.25	7.40	35.46

802.11ax HEW160_Nss1,(MCS0)_1TX

5570MHz_TnomVnom

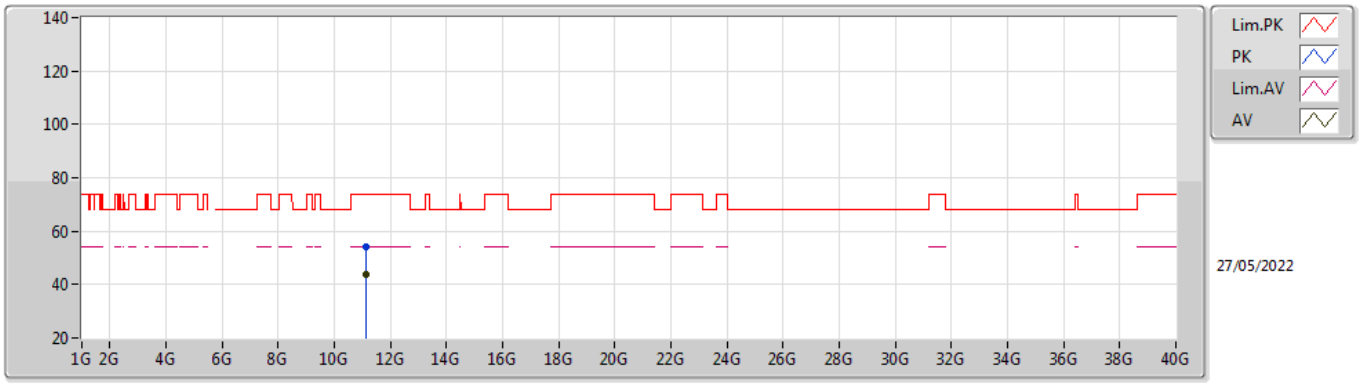


EUT X_1TX
Setting 11.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.12848G	54.21	74.00	-19.79	40.19	3	Vertical	213	1.32	-	38.53	10.67	35.18
AV	11.15254G	43.87	54.00	-10.13	29.86	3	Vertical	213	1.32	-	38.55	10.67	35.21

802.11ax HEW160_Nss1,(MCS0)_1TX

5570MHz_TnomVnom

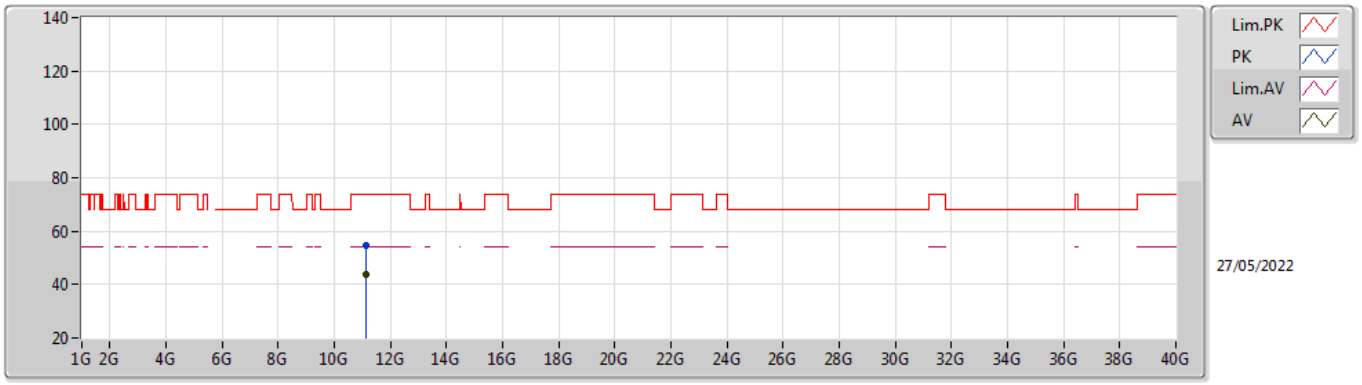

EUT X_1TX
Setting 11.25
03-B-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1292G	54.65	74.00	-19.35	40.63	3	Horizontal	316	2.18	-	38.53	10.67	35.18
AV	11.1502G	43.57	54.00	-10.43	29.56	3	Horizontal	316	2.18	-	38.55	10.67	35.21

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW40_Nss1,(MCS0)_1TX	Pass	AV	5.35G	53.99	54.00	-0.01	3	Vertical	75	1.31	-

802.11a_Nss1,(6Mbps)_1TX

5180MHz_TnomVnom

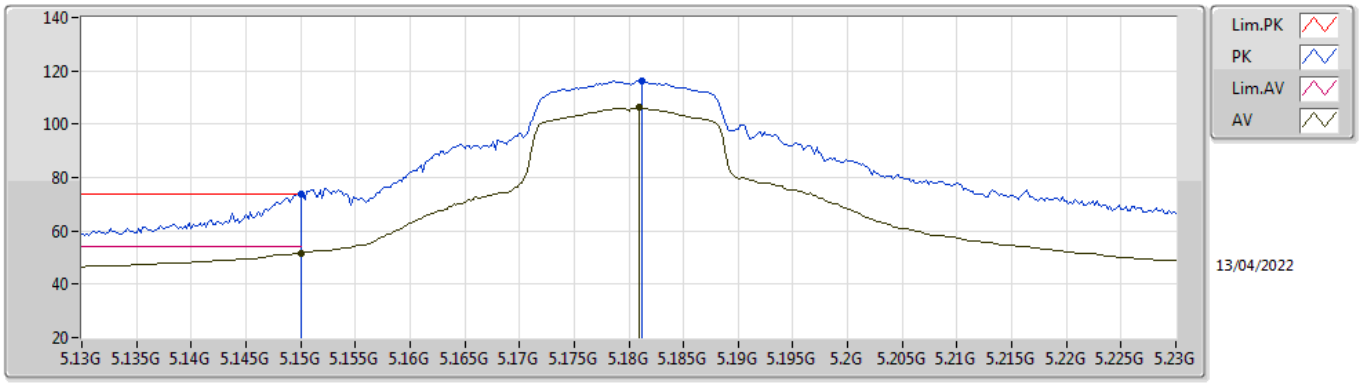


EUT X_1TX
Setting 19
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	73.82	74.00	-0.18	67.99	3	Vertical	78	1.52	-	34.00	7.17	35.34
AV	5.15G	51.68	54.00	-2.32	45.85	3	Vertical	78	1.52	-	34.00	7.17	35.34
PK	5.1812G	116.26	Inf	-Inf	110.29	3	Vertical	78	1.52	-	34.12	7.19	35.34
AV	5.181G	106.17	Inf	-Inf	100.20	3	Vertical	78	1.52	-	34.12	7.19	35.34

802.11a_Nss1,(6Mbps)_1TX

5180MHz_TnomVnom

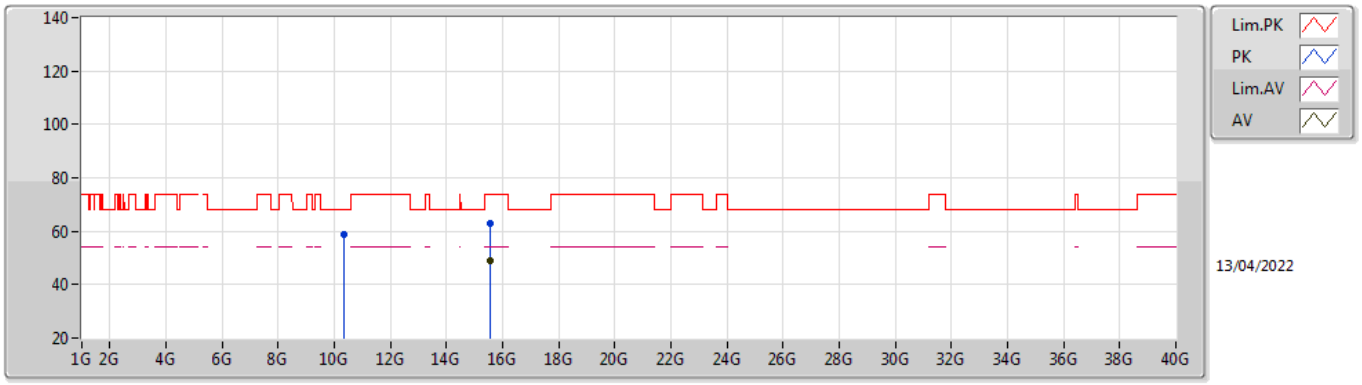


EUT X_1TX
Setting 19
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.36064G	58.73	68.20	-9.47	45.60	3	Vertical	193	1.06	-	38.16	10.55	35.58
PK	15.5358G	63.15	74.00	-10.85	46.93	3	Vertical	160	2.03	-	38.45	13.17	35.40
AV	15.53838G	49.03	54.00	-4.97	32.83	3	Vertical	160	2.03	-	38.43	13.17	35.40

802.11a_Nss1,(6Mbps)_1TX

5180MHz_TnomVnom

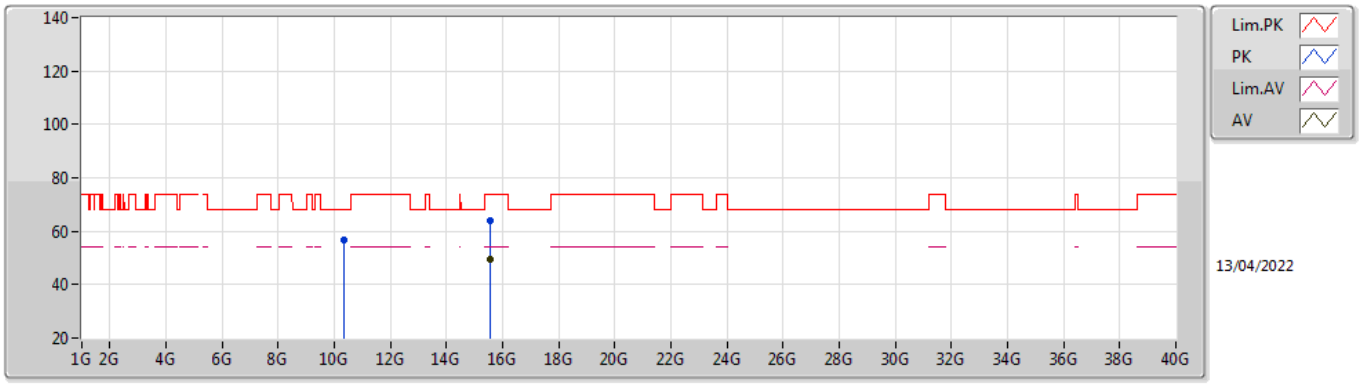


EUT X_1TX
Setting 19
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.35832G	56.75	68.20	-11.45	43.62	3	Horizontal	165	2.24	-	38.16	10.55	35.58
PK	15.5376G	63.98	74.00	-10.02	47.77	3	Horizontal	318	1.84	-	38.44	13.17	35.40
AV	15.53844G	49.35	54.00	-4.65	33.15	3	Horizontal	318	1.84	-	38.43	13.17	35.40

802.11a_Nss1,(6Mbps)_1TX

5200MHz_TnomVnom

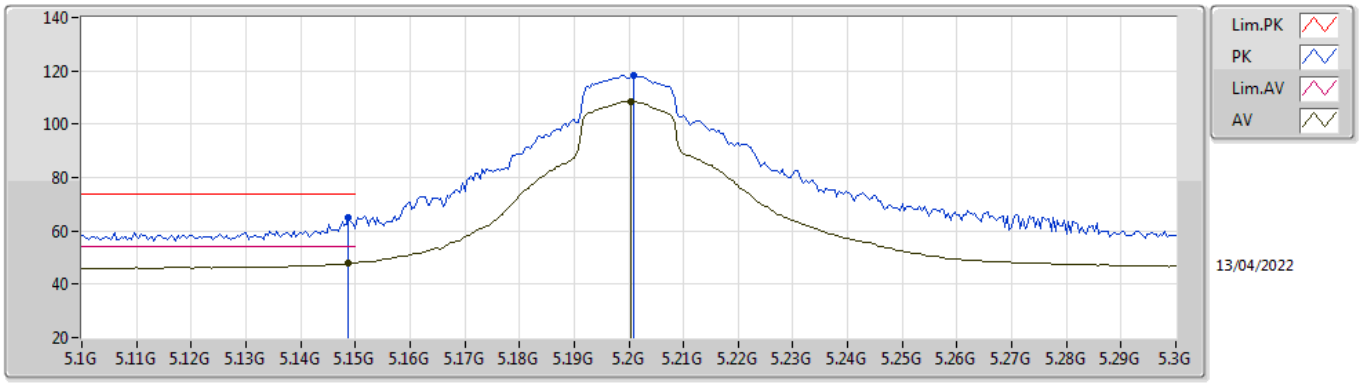


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1488G	64.76	74.00	-9.24	58.93	3	Vertical	77	1.53	-	34.00	7.17	35.34
AV	5.1488G	47.93	54.00	-6.07	42.10	3	Vertical	77	1.53	-	34.00	7.17	35.34
PK	5.2008G	118.47	Inf	-Inf	112.41	3	Vertical	77	1.53	-	34.20	7.20	35.34
AV	5.2004G	108.46	Inf	-Inf	102.40	3	Vertical	77	1.53	-	34.20	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5200MHz_TnomVnom

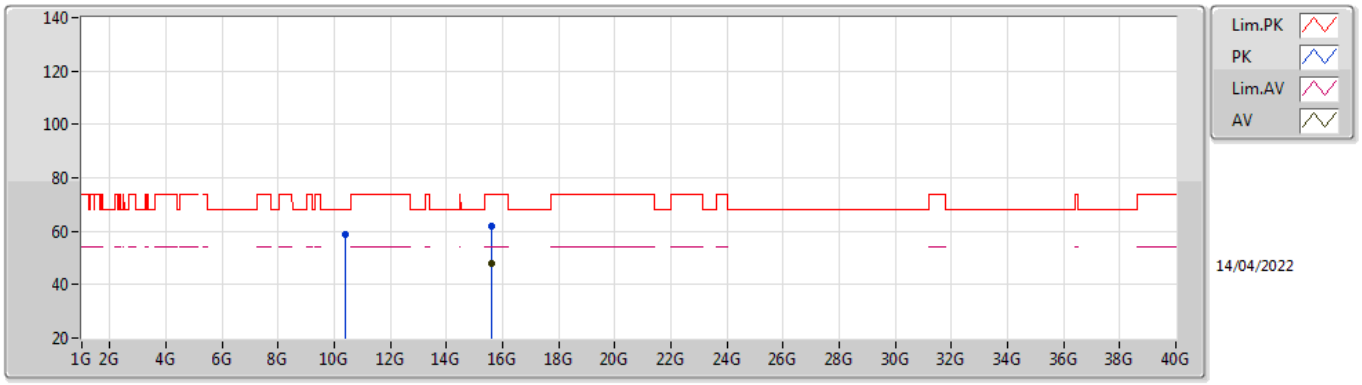


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.40102G	58.62	68.20	-9.58	45.41	3	Vertical	179	1.02	-	38.20	10.56	35.55
PK	15.59394G	62.09	74.00	-11.91	46.30	3	Vertical	270	2.08	-	38.04	13.20	35.45
AV	15.5988G	47.76	54.00	-6.24	32.00	3	Vertical	270	2.08	-	38.01	13.20	35.45

802.11a_Nss1,(6Mbps)_1TX

5200MHz_TnomVnom

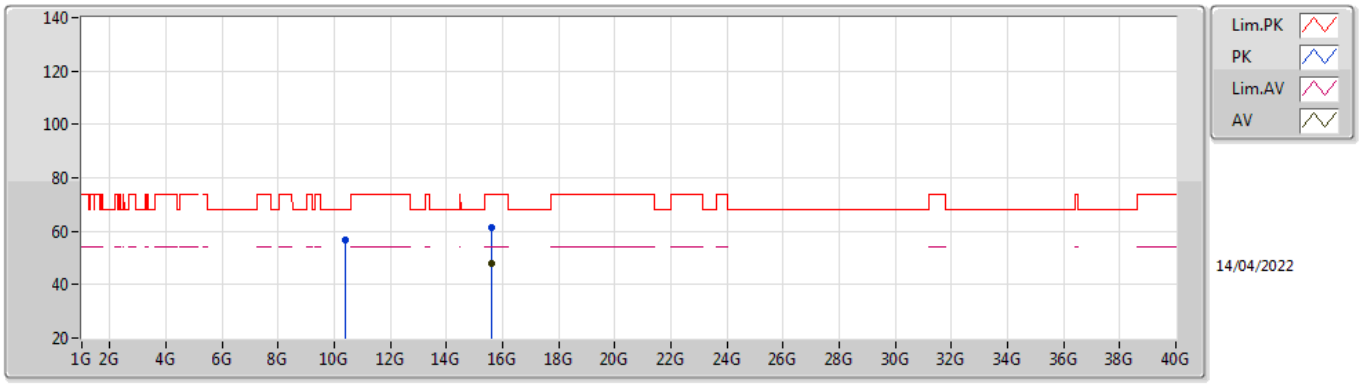


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.39922G	56.47	68.20	-11.73	43.26	3	Horizontal	138	2.69	-	38.20	10.56	35.55
PK	15.60558G	61.33	74.00	-12.67	45.62	3	Horizontal	26	1.75	-	37.97	13.20	35.46
AV	15.59706G	47.81	54.00	-6.19	32.04	3	Horizontal	26	1.75	-	38.02	13.20	35.45

802.11a_Nss1,(6Mbps)_1TX

5240MHz_TnomVnom

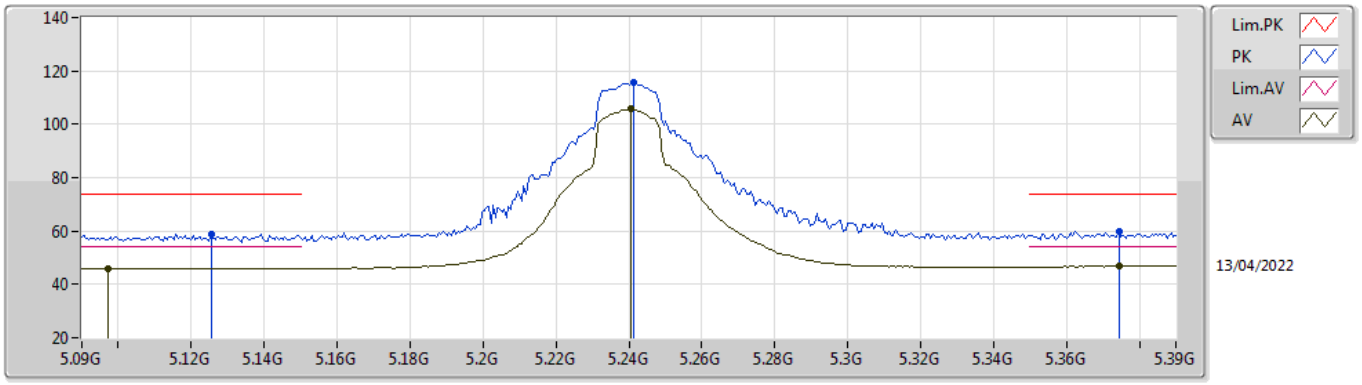


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1254G	58.82	74.00	-15.18	53.05	3	Vertical	250	1.80	-	33.95	7.16	35.34
AV	5.0972G	45.96	54.00	-8.04	40.25	3	Vertical	250	1.80	-	33.89	7.15	35.33
PK	5.2412G	115.46	Inf	-Inf	109.24	3	Vertical	250	1.80	-	34.36	7.20	35.34
AV	5.2406G	105.62	Inf	-Inf	99.40	3	Vertical	250	1.80	-	34.36	7.20	35.34
PK	5.3744G	59.88	74.00	-14.12	53.47	3	Vertical	250	1.80	-	34.55	7.20	35.34
AV	5.3744G	47.01	54.00	-6.99	40.60	3	Vertical	250	1.80	-	34.55	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5240MHz_TnomVnom

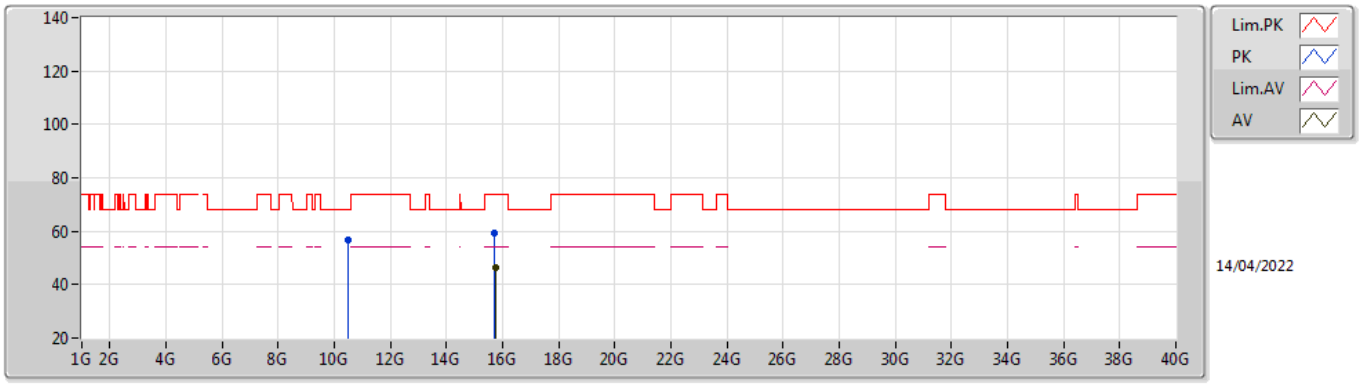


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.4779G	56.50	68.20	-11.70	43.22	3	Vertical	350	1.80	-	38.20	10.57	35.49
PK	15.71964G	59.13	74.00	-14.87	43.84	3	Vertical	106	2.23	-	37.58	13.26	35.55
AV	15.73242G	46.20	54.00	-7.80	30.87	3	Vertical	106	2.23	-	37.63	13.27	35.57

802.11a_Nss1,(6Mbps)_1TX

5240MHz_TnomVnom

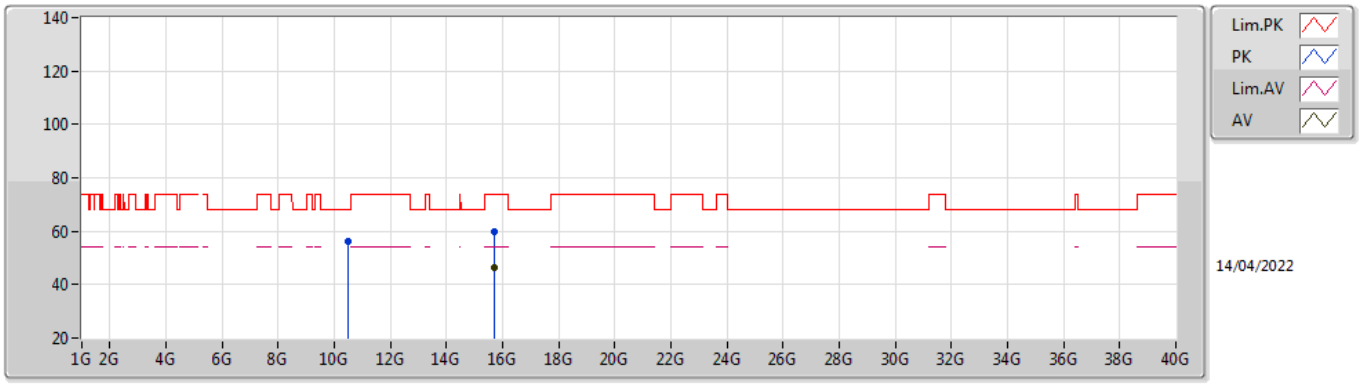


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.4761G	56.23	68.20	-11.97	42.95	3	Horizontal	139	2.69	-	38.20	10.57	35.49
PK	15.7236G	59.85	74.00	-14.15	44.56	3	Horizontal	62	1.19	-	37.59	13.26	35.56
AV	15.71988G	46.33	54.00	-7.67	31.04	3	Horizontal	62	1.19	-	37.58	13.26	35.55

802.11a_Nss1,(6Mbps)_1TX

5260MHz_TnomVnom

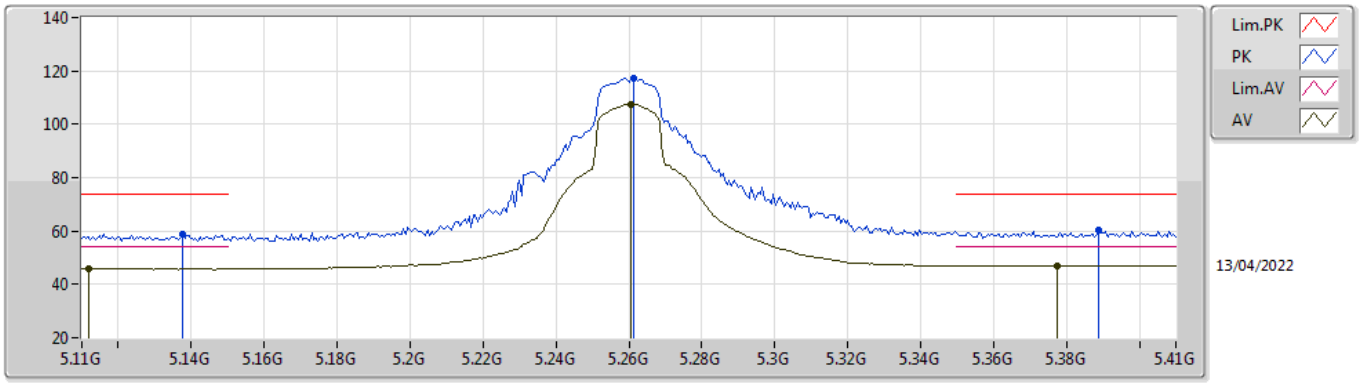


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1376G	58.75	74.00	-15.25	52.94	3	Vertical	78	1.56	-	33.98	7.17	35.34
AV	5.1118G	45.90	54.00	-8.10	40.15	3	Vertical	78	1.56	-	33.92	7.16	35.33
PK	5.2612G	117.45	Inf	-Inf	111.17	3	Vertical	78	1.56	-	34.42	7.20	35.34
AV	5.2606G	107.57	Inf	-Inf	101.29	3	Vertical	78	1.56	-	34.42	7.20	35.34
PK	5.389G	60.50	74.00	-13.50	54.07	3	Vertical	78	1.56	-	34.58	7.20	35.35
AV	5.3776G	47.14	54.00	-6.86	40.73	3	Vertical	78	1.56	-	34.56	7.20	35.35

802.11a_Nss1,(6Mbps)_1TX

5260MHz_TnomVnom

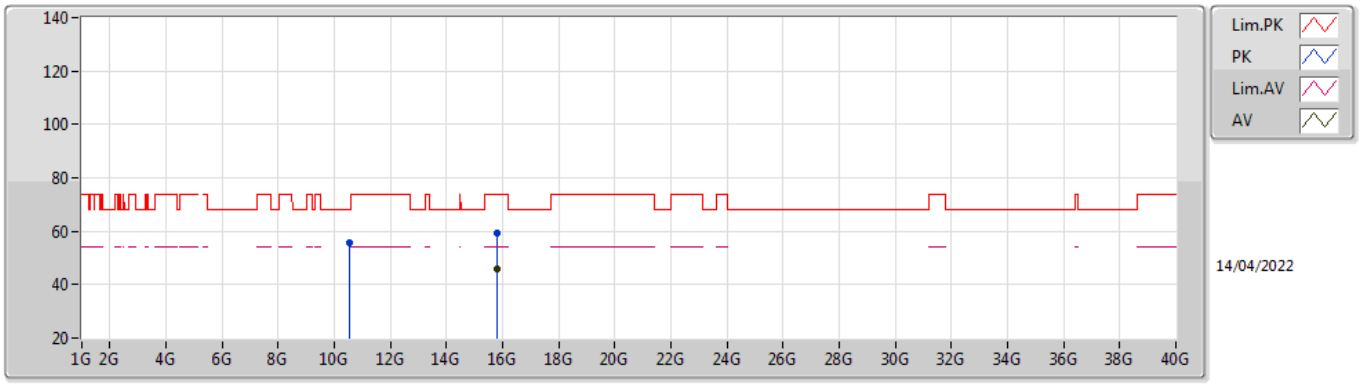


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.52138G	55.78	68.20	-12.42	42.45	3	Vertical	353	1.80	-	38.20	10.58	35.45
PK	15.79032G	59.49	74.00	-14.51	43.94	3	Vertical	245	1.24	-	37.86	13.30	35.61
AV	15.79404G	45.95	54.00	-8.05	30.39	3	Vertical	245	1.24	-	37.88	13.30	35.62

802.11a_Nss1,(6Mbps)_1TX

5260MHz_TnomVnom

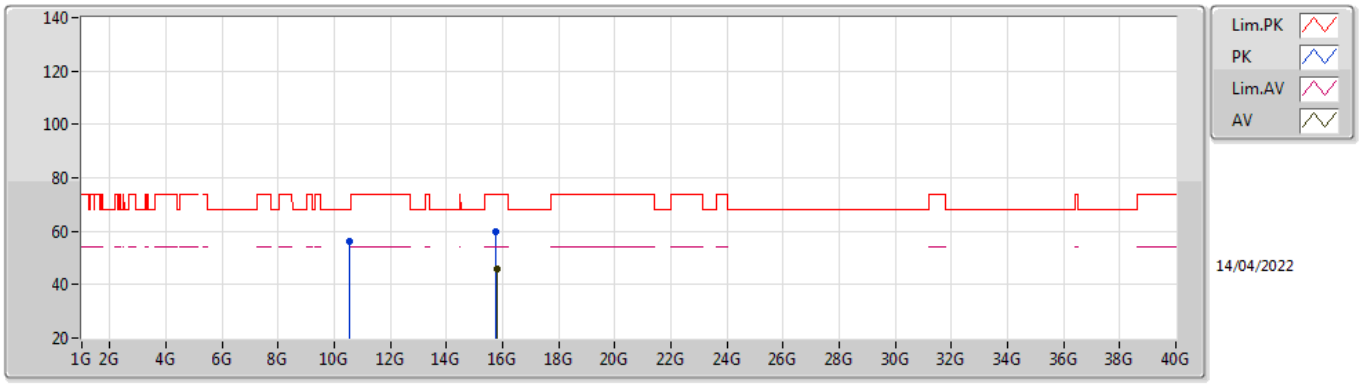


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.52852G	56.21	68.20	-11.99	42.88	3	Horizontal	310	1.00	-	38.20	10.58	35.45
PK	15.77052G	59.89	74.00	-14.11	44.42	3	Horizontal	265	2.58	-	37.78	13.29	35.60
AV	15.7812G	45.98	54.00	-8.02	30.48	3	Horizontal	265	2.58	-	37.82	13.29	35.61

802.11a_Nss1,(6Mbps)_1TX

5300MHz_TnomVnom

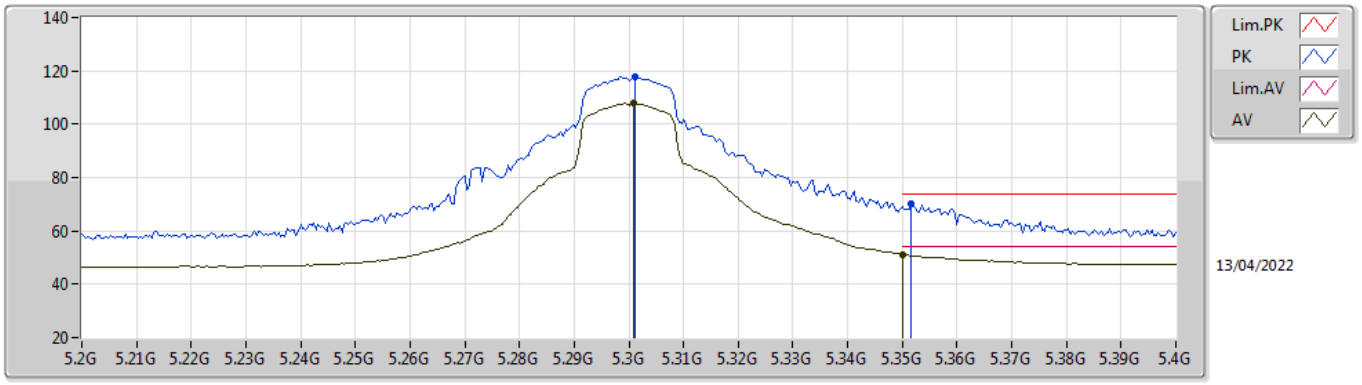


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3012G	117.56	Inf	-Inf	111.20	3	Vertical	79	1.58	-	34.50	7.20	35.34
AV	5.3008G	107.78	Inf	-Inf	101.42	3	Vertical	79	1.58	-	34.50	7.20	35.34
PK	5.3516G	70.32	74.00	-3.68	63.96	3	Vertical	79	1.58	-	34.50	7.20	35.34
AV	5.35G	51.17	54.00	-2.83	44.81	3	Vertical	79	1.58	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5300MHz_TnomVnom

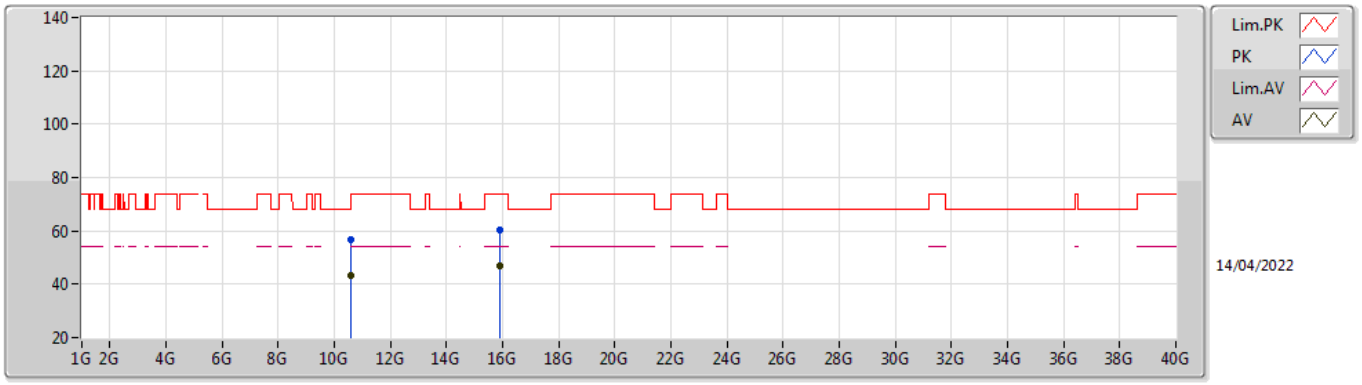


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.61422G	56.50	74.00	-17.50	43.05	3	Vertical	343	1.80	-	38.23	10.59	35.37
AV	10.6009G	43.08	54.00	-10.92	29.67	3	Vertical	343	1.80	-	38.20	10.59	35.38
PK	15.90816G	60.58	74.00	-13.42	45.36	3	Vertical	169	1.26	-	37.58	13.35	35.71
AV	15.9042G	46.74	54.00	-7.26	31.51	3	Vertical	169	1.26	-	37.59	13.35	35.71

802.11a_Nss1,(6Mbps)_1TX

5300MHz_TnomVnom

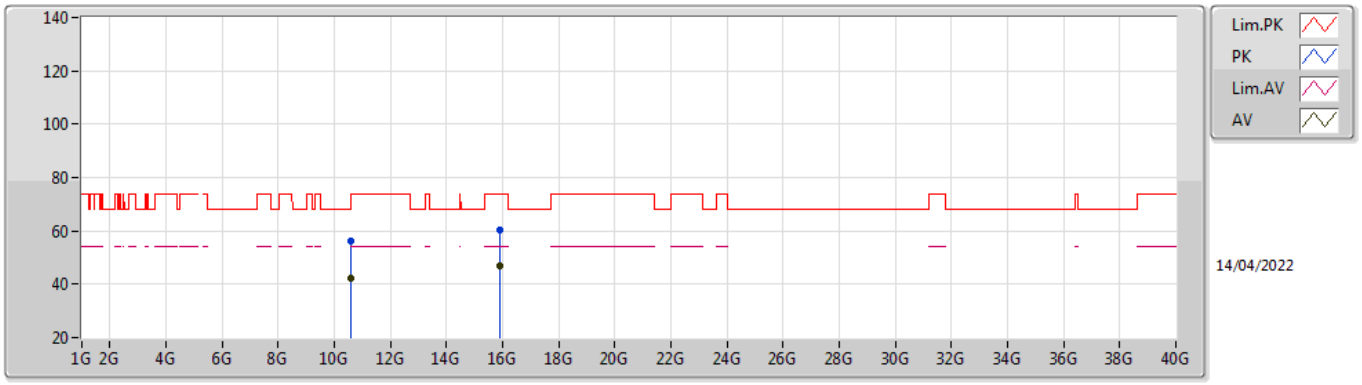


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60234G	56.38	74.00	-17.62	42.97	3	Horizontal	309	1.08	-	38.20	10.59	35.38
AV	10.6012G	42.35	54.00	-11.65	28.94	3	Horizontal	309	1.08	-	38.20	10.59	35.38
PK	15.90054G	60.44	74.00	-13.56	45.20	3	Horizontal	232	2.10	-	37.60	13.35	35.71
AV	15.89838G	46.71	54.00	-7.29	31.46	3	Horizontal	232	2.10	-	37.60	13.35	35.70

802.11a_Nss1,(6Mbps)_1TX

5320MHz_TnomVnom

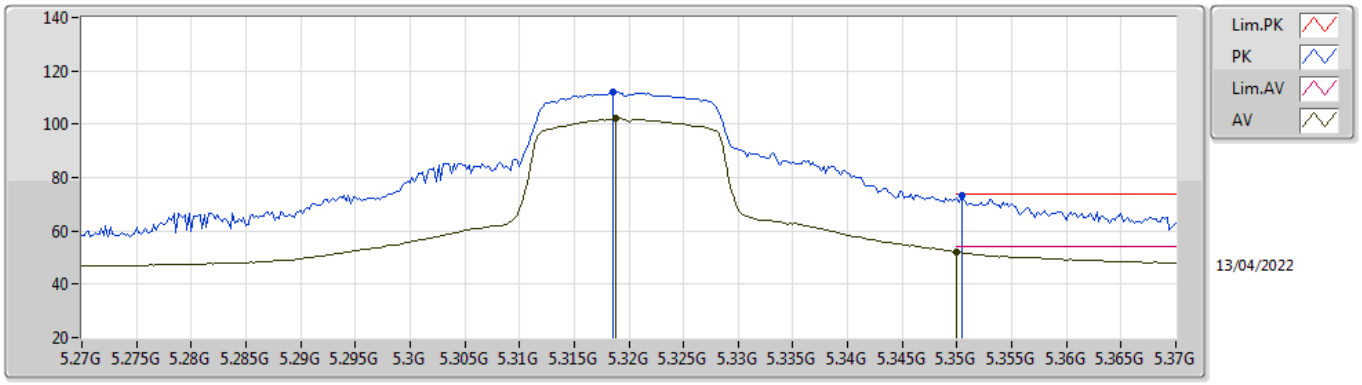


EUT X_1TX
Setting 17
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3186G	111.89	Inf	-Inf	105.53	3	Vertical	247	1.80	-	34.50	7.20	35.34
AV	5.3188G	102.03	Inf	-Inf	95.67	3	Vertical	247	1.80	-	34.50	7.20	35.34
PK	5.3504G	73.03	74.00	-0.97	66.67	3	Vertical	247	1.80	-	34.50	7.20	35.34
AV	5.35G	51.89	54.00	-2.11	45.53	3	Vertical	247	1.80	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_1TX

5320MHz_TnomVnom

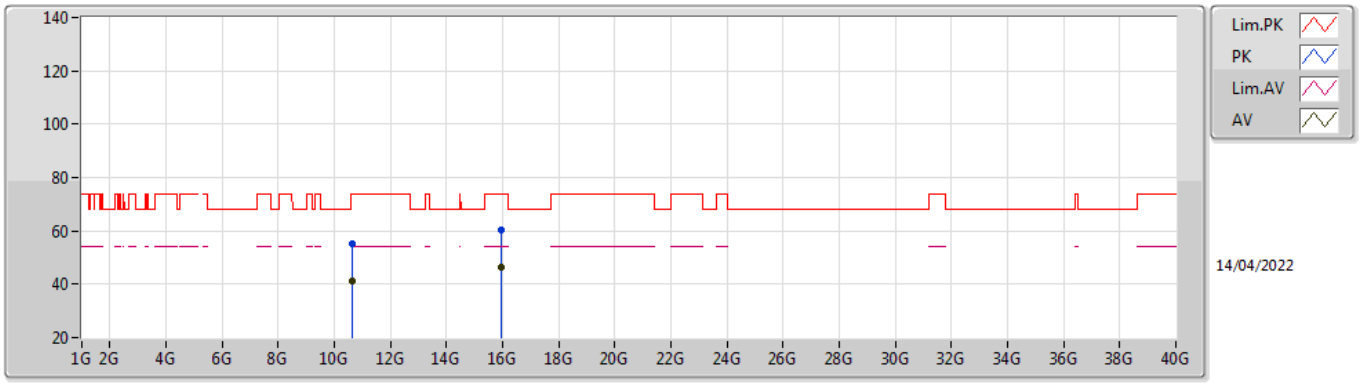


EUT X_1TX
Setting 17
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.64378G	54.93	74.00	-19.07	41.39	3	Vertical	29	2.23	-	38.29	10.60	35.35
AV	10.65386G	41.14	54.00	-12.86	27.57	3	Vertical	29	2.23	-	38.31	10.60	35.34
PK	15.95568G	60.55	74.00	-13.45	45.43	3	Vertical	108	2.16	-	37.49	13.38	35.75
AV	15.97224G	46.38	54.00	-7.62	31.30	3	Vertical	108	2.16	-	37.46	13.39	35.77

802.11a_Nss1,(6Mbps)_1TX

5320MHz_TnomVnom

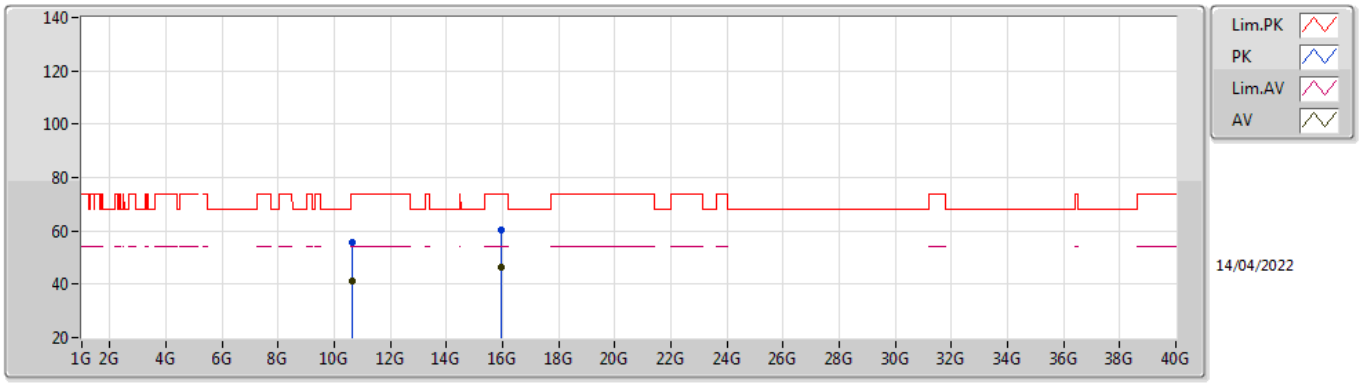


EUT X_1TX
Setting 17
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.63064G	55.51	74.00	-18.49	42.02	3	Horizontal	293	1.96	-	38.26	10.59	35.36
AV	10.6517G	41.10	54.00	-12.90	27.54	3	Horizontal	293	1.96	-	38.30	10.60	35.34
PK	15.9567G	60.26	74.00	-13.74	45.14	3	Horizontal	178	1.37	-	37.49	13.38	35.75
AV	15.94626G	46.37	54.00	-7.63	31.23	3	Horizontal	178	1.37	-	37.51	13.37	35.74

802.11a_Nss1,(6Mbps)_1TX

5500MHz_TnomVnom

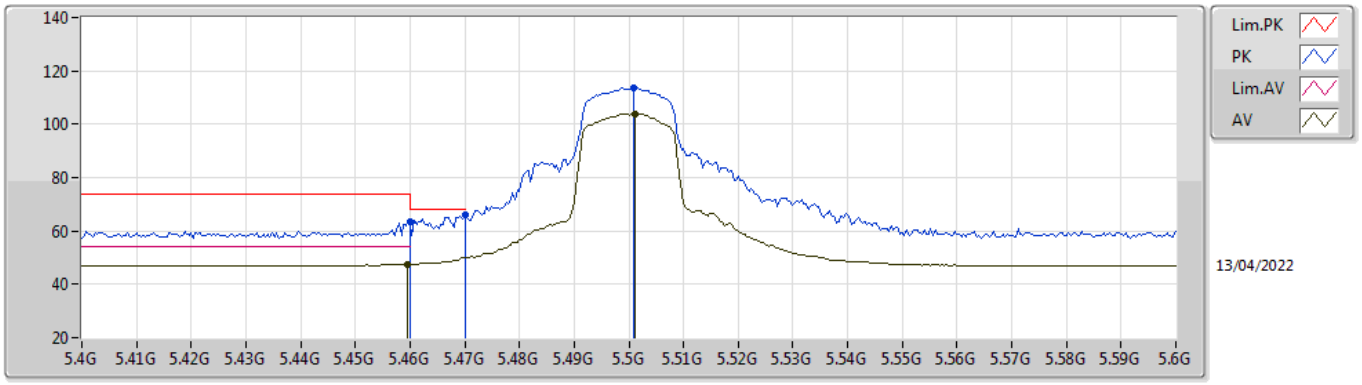


EUT X_1TX
Setting 17.75
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.46G	63.31	74.00	-10.69	56.88	3	Vertical	254	1.69	-	34.52	7.26	35.35
AV	5.4596G	47.61	54.00	-6.39	41.18	3	Vertical	254	1.69	-	34.52	7.26	35.35
PK	5.47G	66.17	68.20	-2.03	59.71	3	Vertical	254	1.69	-	34.54	7.27	35.35
PK	5.5008G	113.67	Inf	-Inf	107.12	3	Vertical	254	1.69	-	34.60	7.30	35.35
AV	5.5012G	104.00	Inf	-Inf	97.45	3	Vertical	254	1.69	-	34.60	7.30	35.35

802.11a_Nss1,(6Mbps)_1TX

5500MHz_TnomVnom

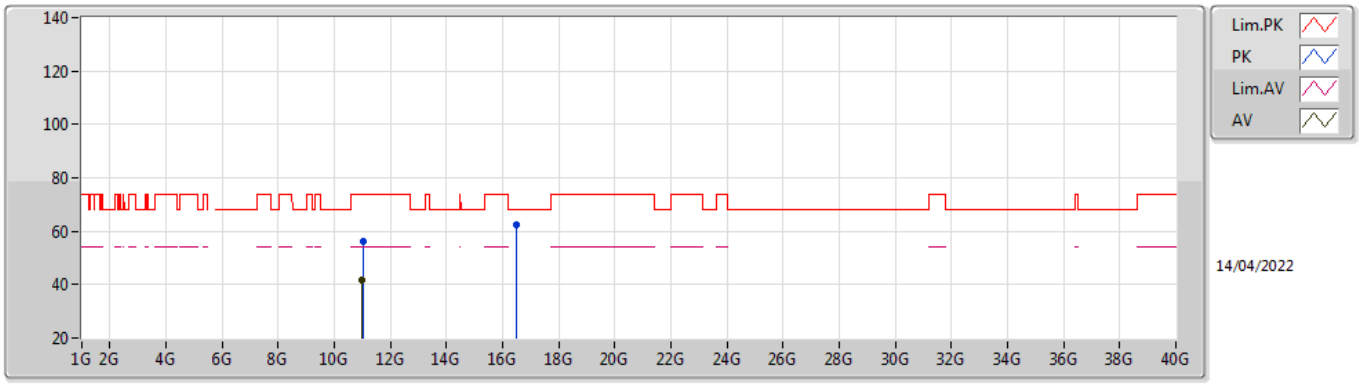


EUT X_1TX
Setting 17.75
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.01026G	55.96	74.00	-18.04	41.95	3	Vertical	26	1.05	-	38.41	10.65	35.05
AV	11.00576G	41.74	54.00	-12.26	27.73	3	Vertical	26	1.05	-	38.41	10.65	35.05
PK	16.50312G	62.24	68.20	-5.96	45.43	3	Vertical	262	2.38	-	38.42	13.75	35.36

802.11a_Nss1,(6Mbps)_1TX

5500MHz_TnomVnom

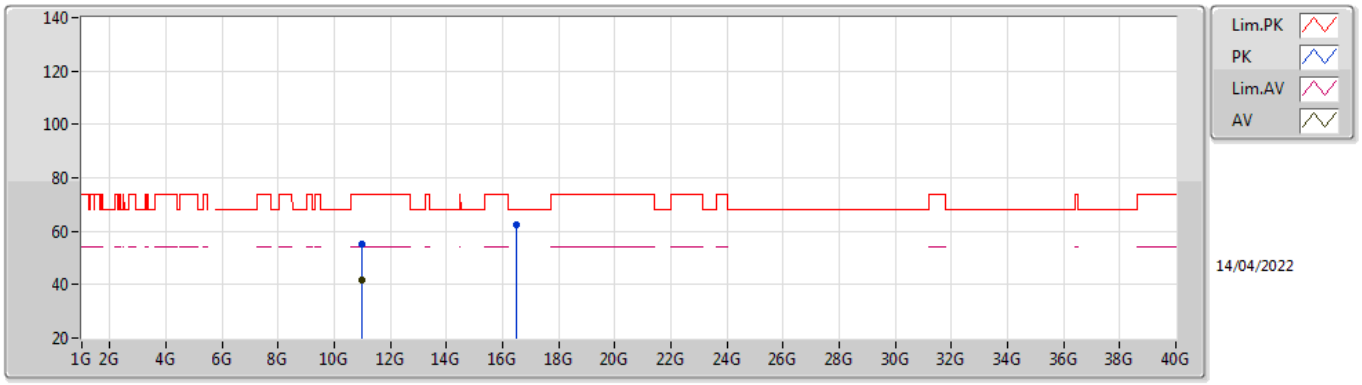


EUT X_1TX
Setting 17.75
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.00618G	55.16	74.00	-18.84	41.15	3	Horizontal	139	1.89	-	38.41	10.65	35.05
AV	11.00642G	41.81	54.00	-12.19	27.80	3	Horizontal	139	1.89	-	38.41	10.65	35.05
PK	16.50144G	62.16	68.20	-6.04	45.36	3	Horizontal	357	2.06	-	38.41	13.75	35.36

802.11a_Nss1,(6Mbps)_1TX

5580MHz_TnomVnom

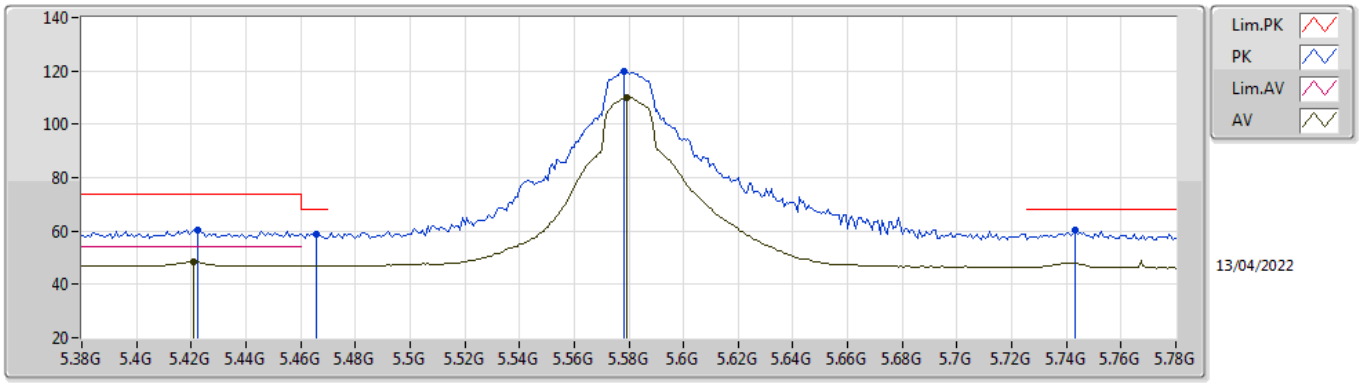


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4224G	60.53	74.00	-13.47	54.10	3	Vertical	79	1.37	-	34.56	7.22	35.35
AV	5.4208G	48.51	54.00	-5.49	42.08	3	Vertical	79	1.37	-	34.56	7.22	35.35
PK	5.4656G	58.90	68.20	-9.30	52.45	3	Vertical	79	1.37	-	34.53	7.27	35.35
PK	5.5784G	119.74	Inf	-Inf	113.15	3	Vertical	79	1.37	-	34.60	7.38	35.39
AV	5.5792G	110.03	Inf	-Inf	103.44	3	Vertical	79	1.37	-	34.60	7.38	35.39
PK	5.7432G	60.24	68.20	-7.96	54.10	3	Vertical	79	1.37	-	34.21	7.40	35.47

802.11a_Nss1,(6Mbps)_1TX

5580MHz_TnomVnom

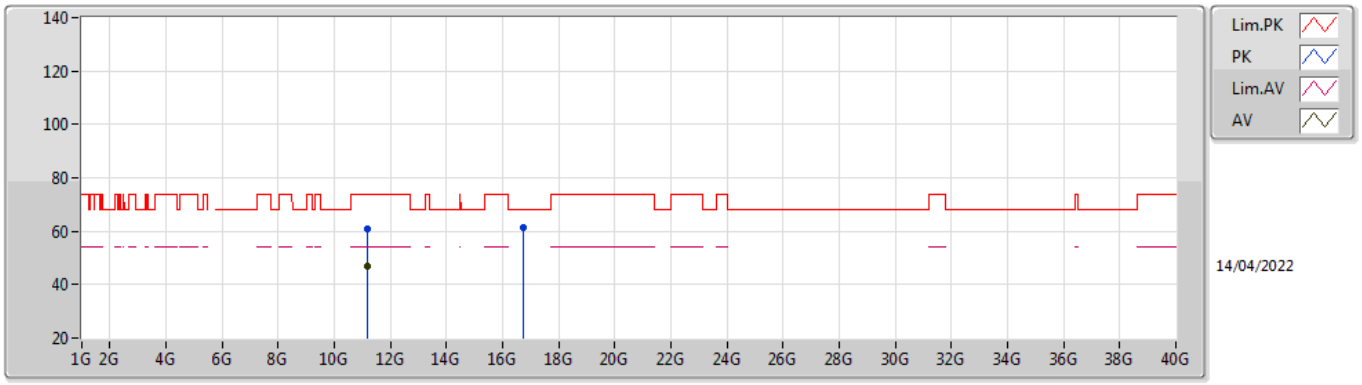


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.16222G	60.82	74.00	-13.18	46.81	3	Vertical	157	2.77	-	38.56	10.67	35.22
AV	11.15976G	47.05	54.00	-6.95	33.04	3	Vertical	157	2.77	-	38.56	10.67	35.22
PK	16.75458G	61.59	68.20	-6.61	43.69	3	Vertical	312	2.27	-	39.08	13.93	35.11

802.11a_Nss1,(6Mbps)_1TX

5580MHz_TnomVnom

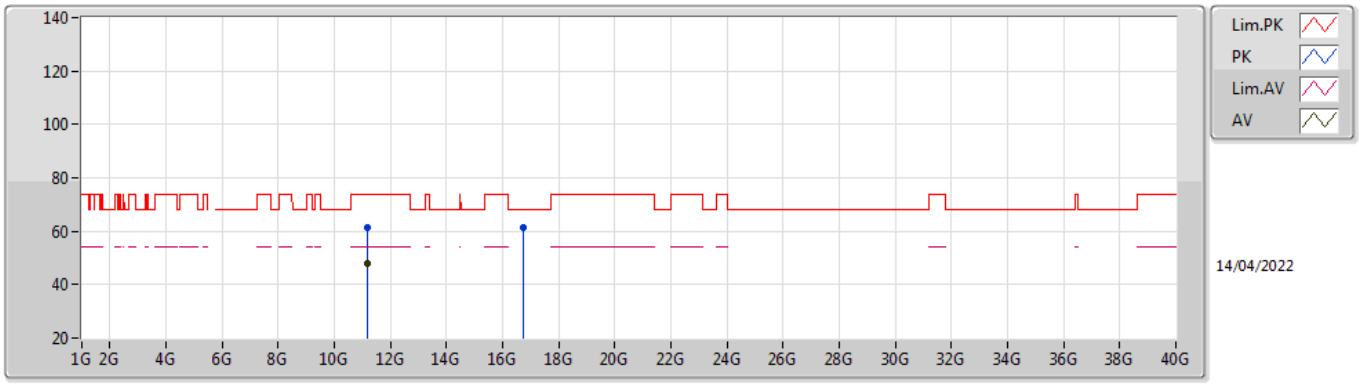


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.15784G	61.56	74.00	-12.44	47.55	3	Horizontal	133	2.07	-	38.56	10.67	35.22
AV	11.15874G	47.92	54.00	-6.08	33.91	3	Horizontal	133	2.07	-	38.56	10.67	35.22
PK	16.75356G	61.50	68.20	-6.70	43.61	3	Horizontal	218	2.06	-	39.07	13.93	35.11

802.11a_Nss1,(6Mbps)_1TX

5700MHz_TnomVnom

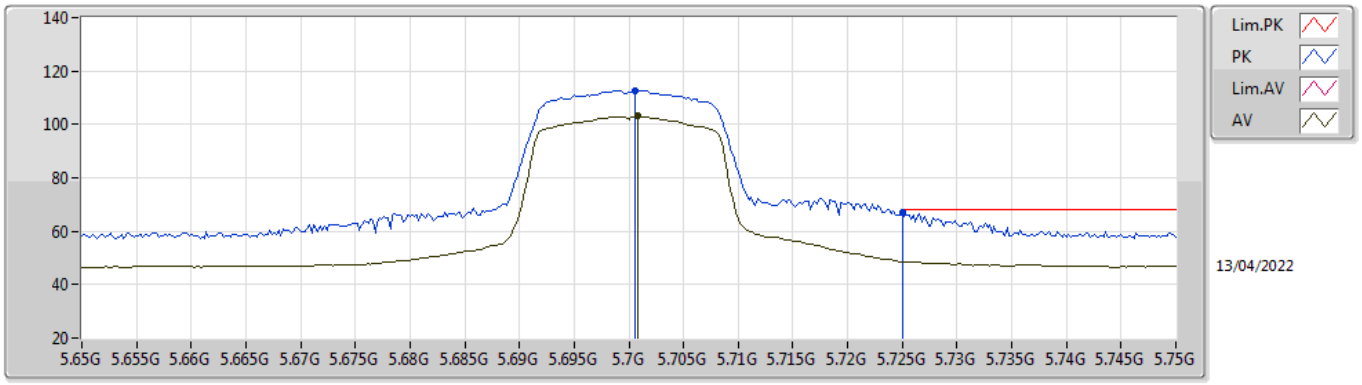


EUT X_1TX
Setting 14.25
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7006G	112.69	Inf	-Inf	106.44	3	Vertical	78	1.29	-	34.30	7.40	35.45
AV	5.7008G	103.06	Inf	-Inf	96.81	3	Vertical	78	1.29	-	34.30	7.40	35.45
PK	5.725G	66.95	68.20	-1.25	60.76	3	Vertical	78	1.29	-	34.25	7.40	35.46

802.11a_Nss1,(6Mbps)_1TX

5700MHz_TnomVnom

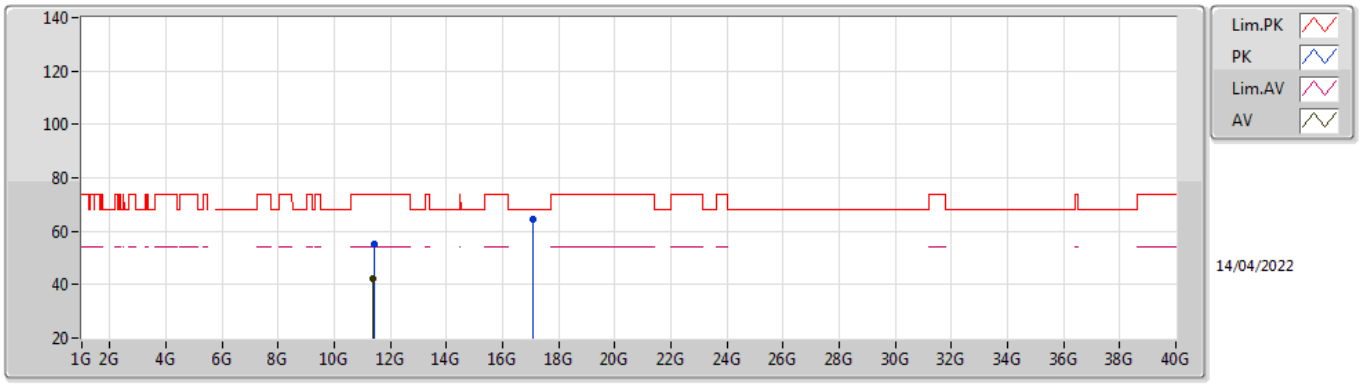


EUT X_1TX
Setting 14.25
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.40588G	55.42	74.00	-18.58	41.39	3	Vertical	116	2.08	-	38.81	10.71	35.49
AV	11.39028G	42.04	54.00	-11.96	28.02	3	Vertical	116	2.08	-	38.79	10.71	35.48
PK	17.10576G	64.39	68.20	-3.81	44.87	3	Vertical	210	1.33	-	40.22	14.17	34.87

802.11a_Nss1,(6Mbps)_1TX

5700MHz_TnomVnom

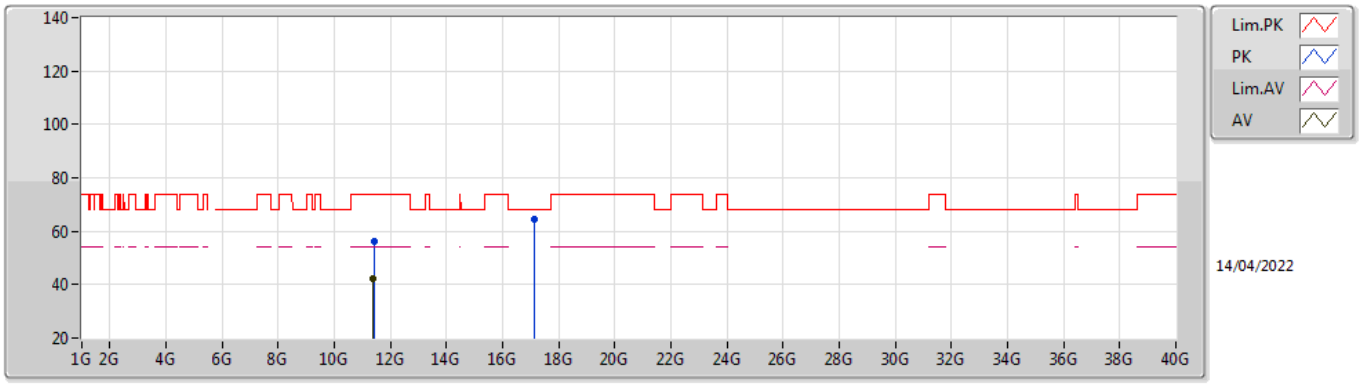


EUT X_1TX
Setting 14.25
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.41416G	55.95	74.00	-18.05	41.91	3	Horizontal	10	2.52	-	38.83	10.71	35.50
AV	11.3934G	42.25	54.00	-11.75	28.23	3	Horizontal	10	2.52	-	38.79	10.71	35.48
PK	17.10918G	64.27	68.20	-3.93	44.72	3	Horizontal	17	1.55	-	40.24	14.18	34.87

802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

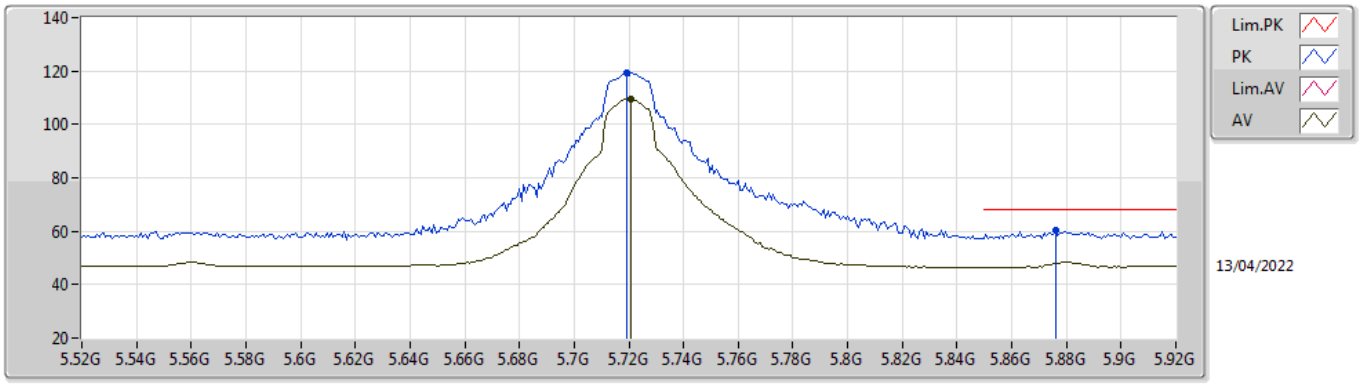


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7192G	119.41	Inf	-Inf	113.21	3	Vertical	78	1.35	-	34.26	7.40	35.46
AV	5.7208G	109.70	Inf	-Inf	103.50	3	Vertical	78	1.35	-	34.26	7.40	35.46
PK	5.876G	60.20	68.20	-8.00	53.80	3	Vertical	78	1.35	-	34.46	7.48	35.54

802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

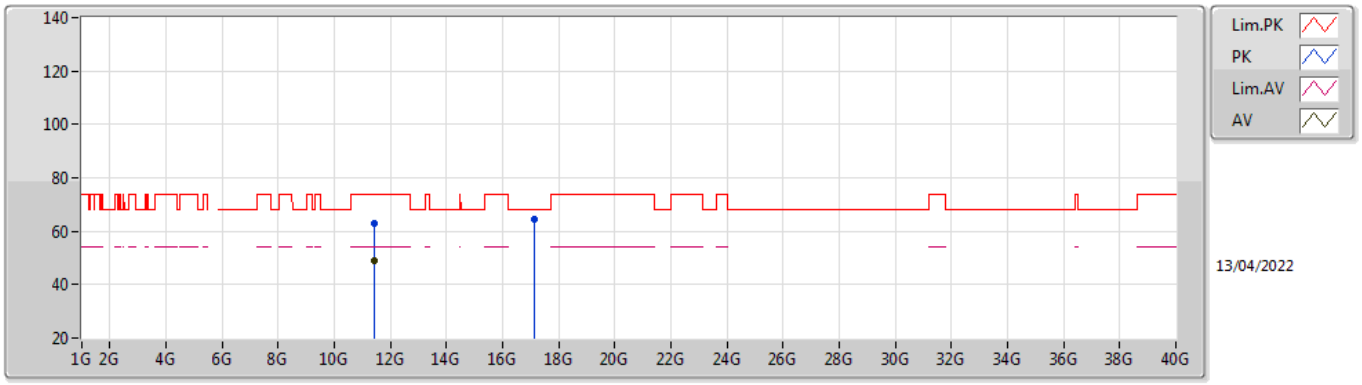


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.44168G	62.86	74.00	-11.14	48.79	3	Vertical	171	2.45	-	38.88	10.72	35.53
AV	11.44114G	49.09	54.00	-4.91	35.02	3	Vertical	171	2.45	-	38.88	10.72	35.53
PK	17.1507G	64.38	68.20	-3.82	44.65	3	Vertical	178	2.67	-	40.40	14.21	34.88

802.11a_Nss1,(6Mbps)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

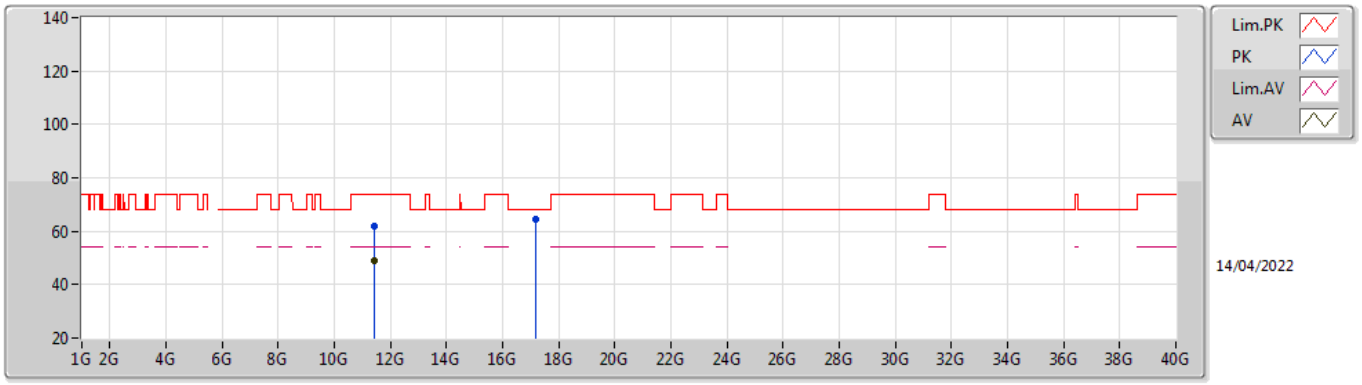


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.43898G	62.08	74.00	-11.92	48.01	3	Horizontal	132	2.09	-	38.88	10.72	35.53
AV	11.44102G	48.71	54.00	-5.29	34.64	3	Horizontal	132	2.09	-	38.88	10.72	35.53
PK	17.16036G	64.27	68.20	-3.93	44.50	3	Horizontal	91	2.83	-	40.44	14.21	34.88

802.11a_Nss1,(6Mbps)_1TX

5745MHz_TnomVnom

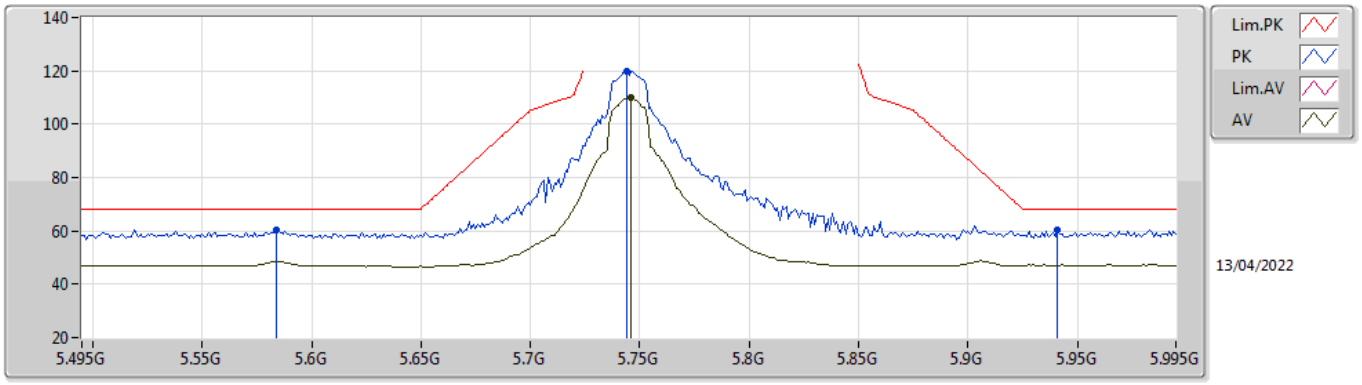


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.584G	60.32	68.20	-7.88	53.73	3	Vertical	78	1.35	-	34.60	7.38	35.39
PK	5.744G	119.97	Inf	-Inf	113.83	3	Vertical	78	1.35	-	34.21	7.40	35.47
AV	5.746G	109.87	Inf	-Inf	103.73	3	Vertical	78	1.35	-	34.21	7.40	35.47
PK	5.941G	60.30	68.20	-7.90	53.57	3	Vertical	78	1.35	-	34.76	7.54	35.57

802.11a_Nss1,(6Mbps)_1TX

5745MHz_TnomVnom

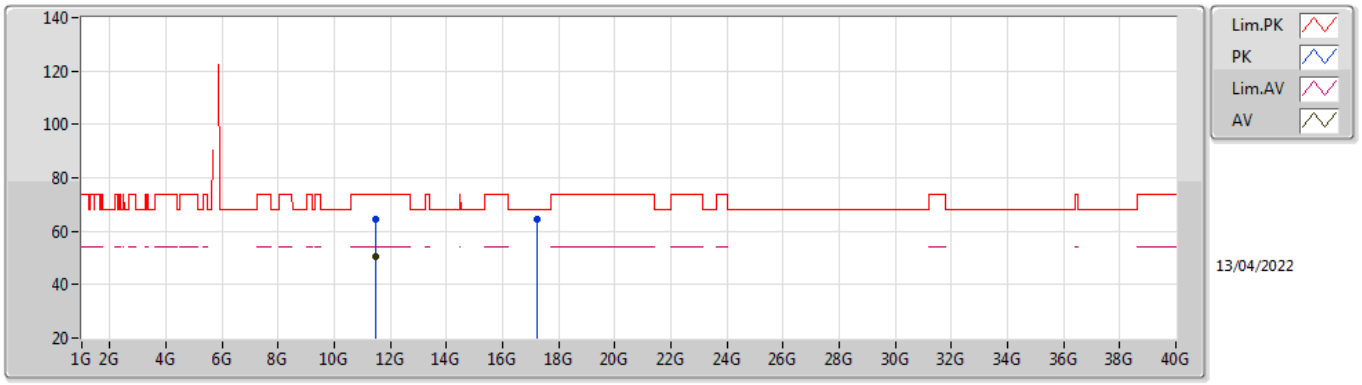


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.49156G	64.37	74.00	-9.63	50.26	3	Vertical	177	2.75	-	38.98	10.72	35.59
AV	11.49144G	50.39	54.00	-3.61	36.28	3	Vertical	177	2.75	-	38.98	10.72	35.59
PK	17.2434G	64.43	68.20	-3.77	44.18	3	Vertical	307	1.07	-	40.86	14.27	34.88

802.11a_Nss1,(6Mbps)_1TX

5745MHz_TnomVnom

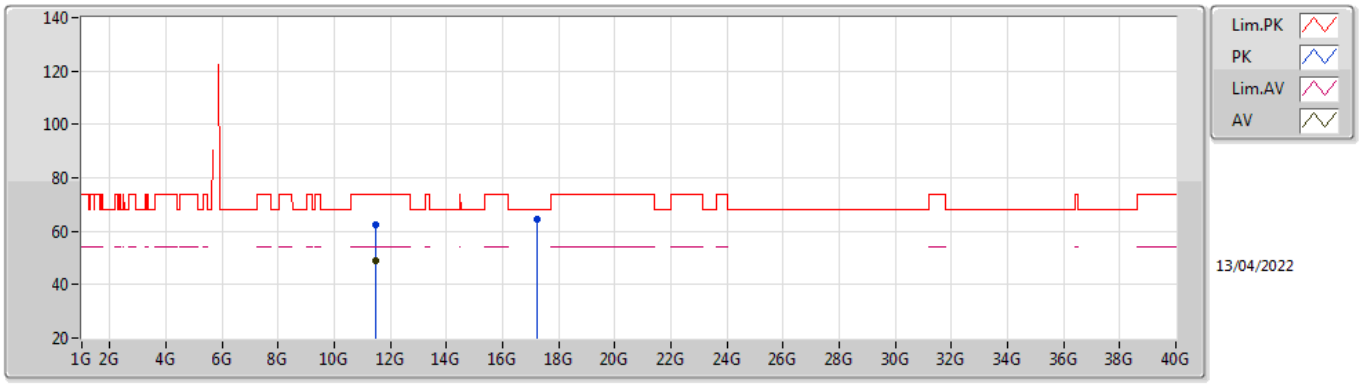


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.49288G	62.56	74.00	-11.44	48.44	3	Horizontal	135	2.06	-	38.99	10.72	35.59
AV	11.4915G	49.05	54.00	-4.95	34.94	3	Horizontal	135	2.06	-	38.98	10.72	35.59
PK	17.24004G	64.50	68.20	-3.70	44.27	3	Horizontal	40	1.85	-	40.84	14.27	34.88

802.11a_Nss1,(6Mbps)_1TX

5785MHz_TnomVnom

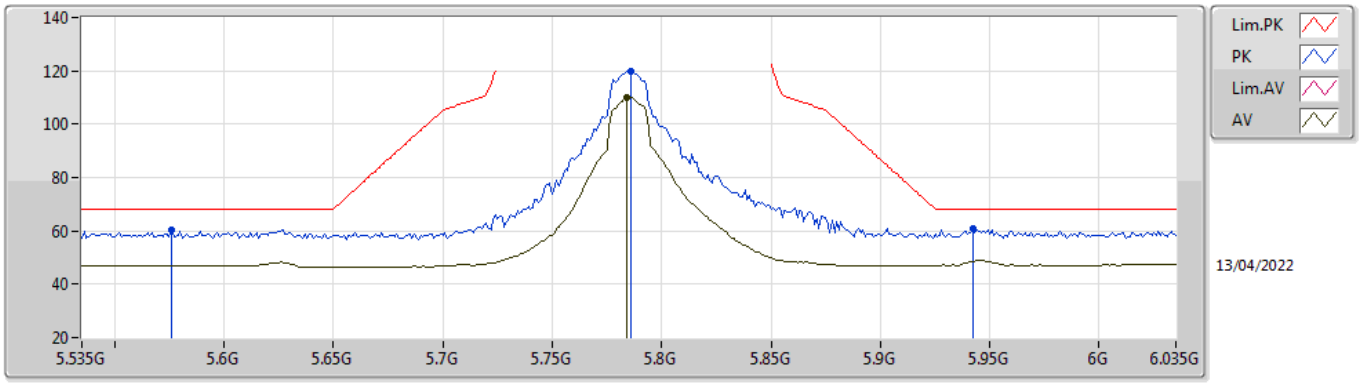


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.576G	60.18	68.20	-8.02	53.59	3	Vertical	79	1.39	-	34.60	7.38	35.39
PK	5.786G	119.80	Inf	-Inf	113.69	3	Vertical	79	1.39	-	34.20	7.40	35.49
AV	5.784G	110.00	Inf	-Inf	103.89	3	Vertical	79	1.39	-	34.20	7.40	35.49
PK	5.942G	61.00	68.20	-7.20	54.26	3	Vertical	79	1.39	-	34.77	7.54	35.57

802.11a_Nss1,(6Mbps)_1TX

5785MHz_TnomVnom

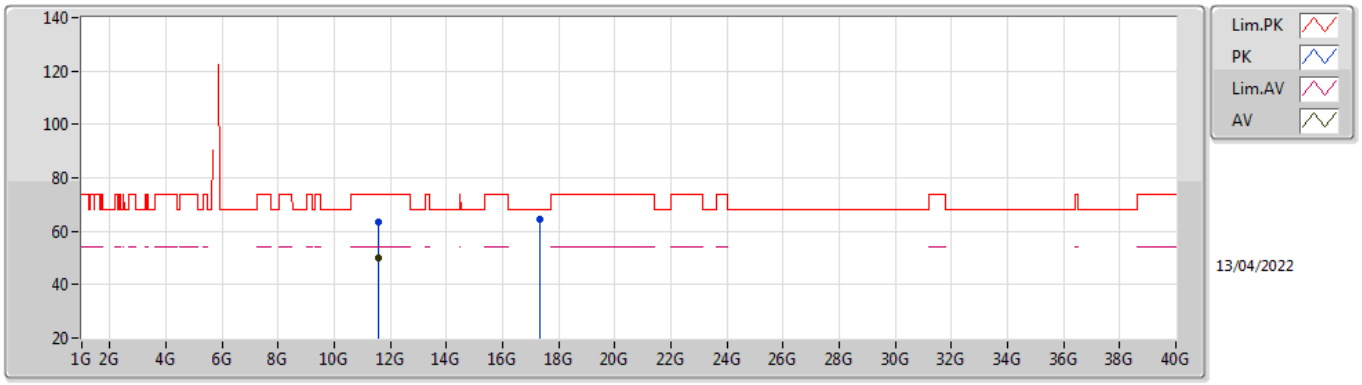


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5733G	63.33	74.00	-10.67	48.88	3	Vertical	155	2.70	-	39.29	10.74	35.58
AV	11.57138G	49.77	54.00	-4.23	35.32	3	Vertical	155	2.70	-	39.29	10.74	35.58
PK	17.34708G	64.49	68.20	-3.71	43.65	3	Vertical	13	1.09	-	41.39	14.34	34.89

802.11a_Nss1,(6Mbps)_1TX

5785MHz_TnomVnom

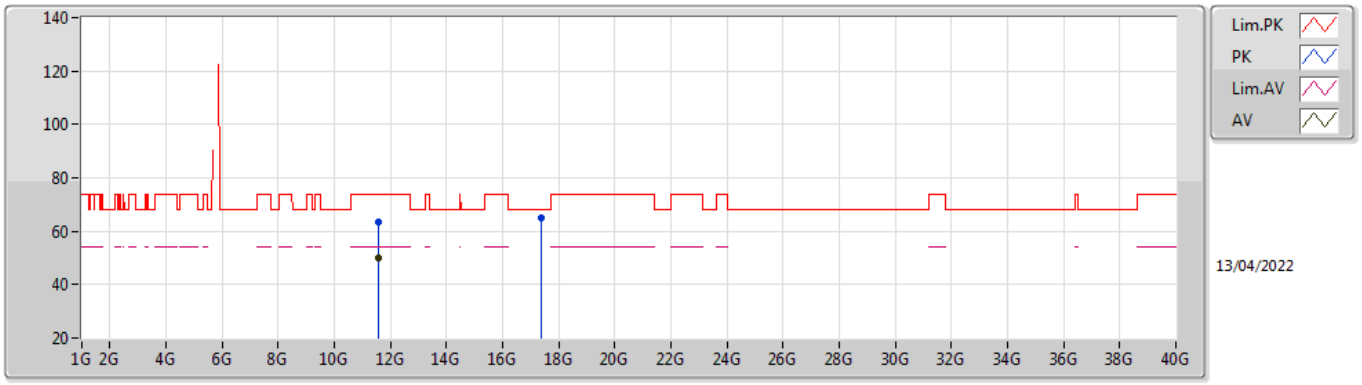


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.57168G	63.68	74.00	-10.32	49.23	3	Horizontal	96	2.69	-	39.29	10.74	35.58
AV	11.57138G	50.19	54.00	-3.81	35.74	3	Horizontal	96	2.69	-	39.29	10.74	35.58
PK	17.35614G	64.95	68.20	-3.25	44.08	3	Horizontal	327	1.26	-	41.42	14.35	34.90

802.11a_Nss1,(6Mbps)_1TX

5825MHz_TnomVnom

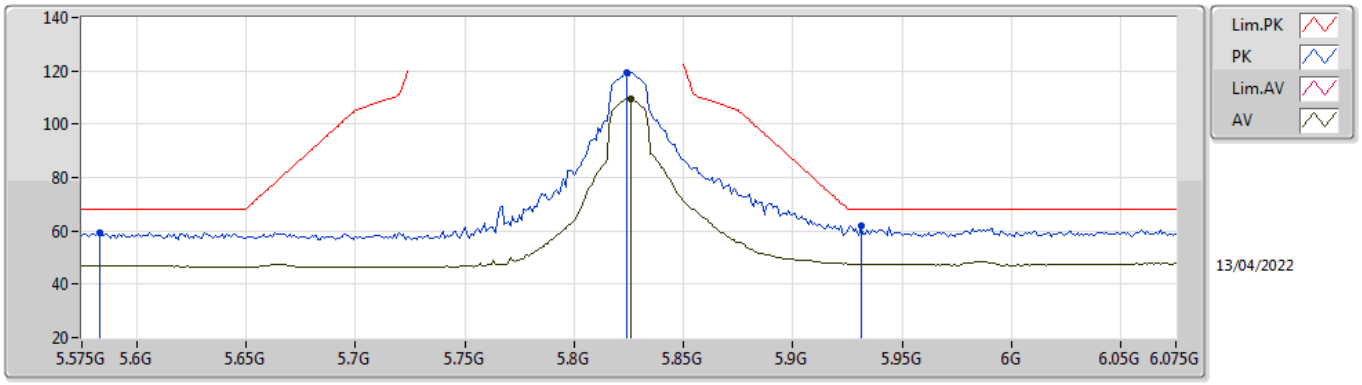


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.583G	59.41	68.20	-8.79	52.82	3	Vertical	77	1.30	-	34.60	7.38	35.39
PK	5.824G	119.47	Inf	-Inf	113.31	3	Vertical	77	1.30	-	34.25	7.42	35.51
AV	5.826G	109.62	Inf	-Inf	103.45	3	Vertical	77	1.30	-	34.25	7.43	35.51
PK	5.931G	61.95	68.20	-6.25	55.27	3	Vertical	77	1.30	-	34.72	7.53	35.57

802.11a_Nss1,(6Mbps)_1TX

5825MHz_TnomVnom

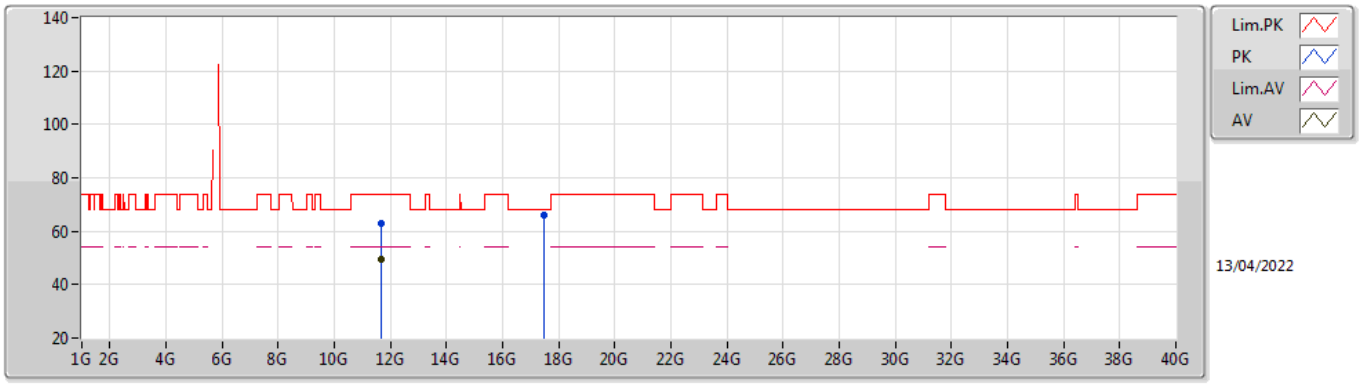


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65216G	63.11	74.00	-10.89	48.53	3	Vertical	168	3.00	-	39.40	10.75	35.57
AV	11.65132G	49.40	54.00	-4.60	34.82	3	Vertical	168	3.00	-	39.40	10.75	35.57
PK	17.48826G	66.12	68.20	-2.08	44.20	3	Vertical	167	1.98	-	42.39	14.44	34.91

802.11a_Nss1,(6Mbps)_1TX

5825MHz_TnomVnom

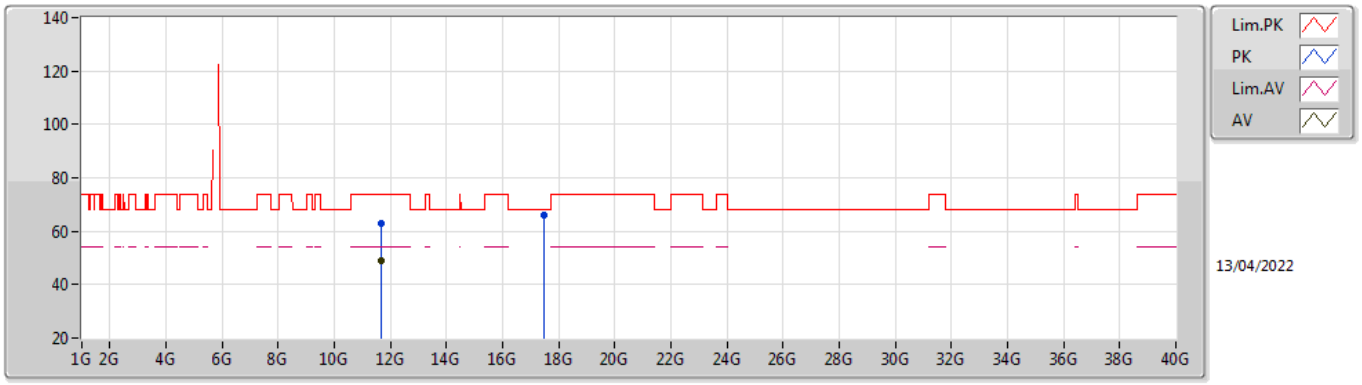


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65216G	63.02	74.00	-10.98	48.44	3	Horizontal	143	2.03	-	39.40	10.75	35.57
AV	11.65144G	48.98	54.00	-5.02	34.40	3	Horizontal	143	2.03	-	39.40	10.75	35.57
PK	17.4789G	66.00	68.20	-2.20	44.16	3	Horizontal	39	2.68	-	42.31	14.44	34.91

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

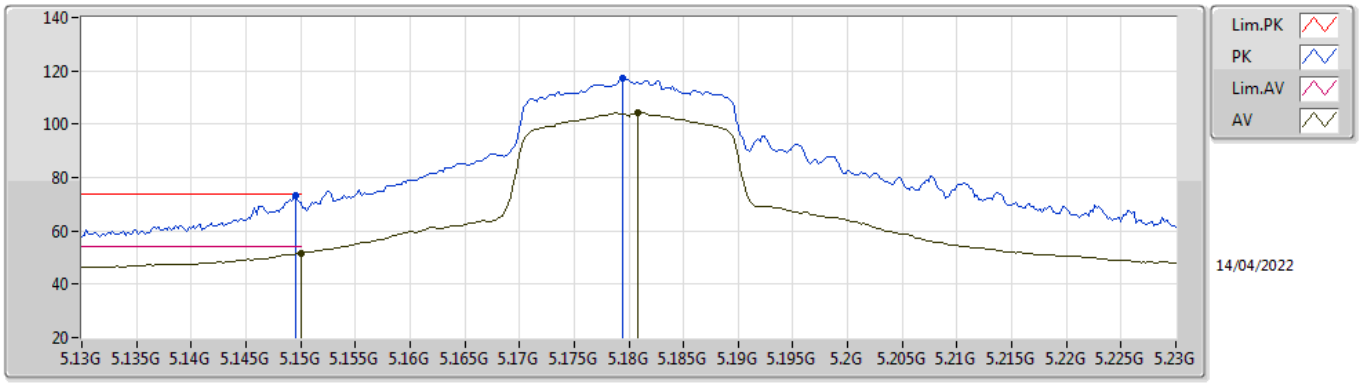


EUT X_1TX
Setting 17.25
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1496G	73.37	74.00	-0.63	67.54	3	Vertical	78	1.51	-	34.00	7.17	35.34
AV	5.15G	51.50	54.00	-2.50	45.67	3	Vertical	78	1.51	-	34.00	7.17	35.34
PK	5.1794G	117.16	Inf	-Inf	111.19	3	Vertical	78	1.51	-	34.12	7.19	35.34
AV	5.1808G	104.30	Inf	-Inf	98.33	3	Vertical	78	1.51	-	34.12	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

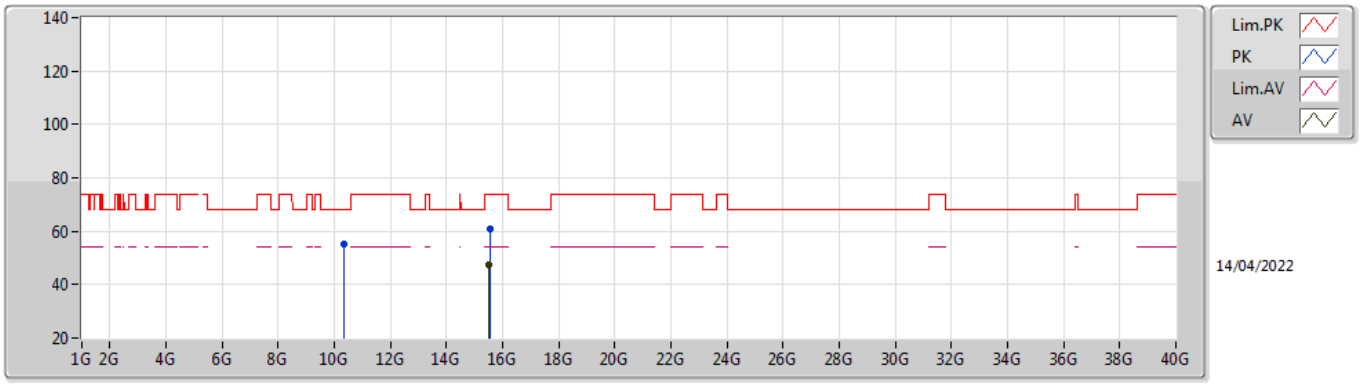


EUT X_1TX
Setting 17.25
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.36548G	55.37	68.20	-12.83	42.23	3	Vertical	217	1.73	-	38.17	10.55	35.58
PK	15.53756G	60.95	74.00	-13.05	44.74	3	Vertical	175	1.23	-	38.44	13.17	35.40
AV	15.53184G	47.38	54.00	-6.62	31.13	3	Vertical	175	1.23	-	38.48	13.17	35.40

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

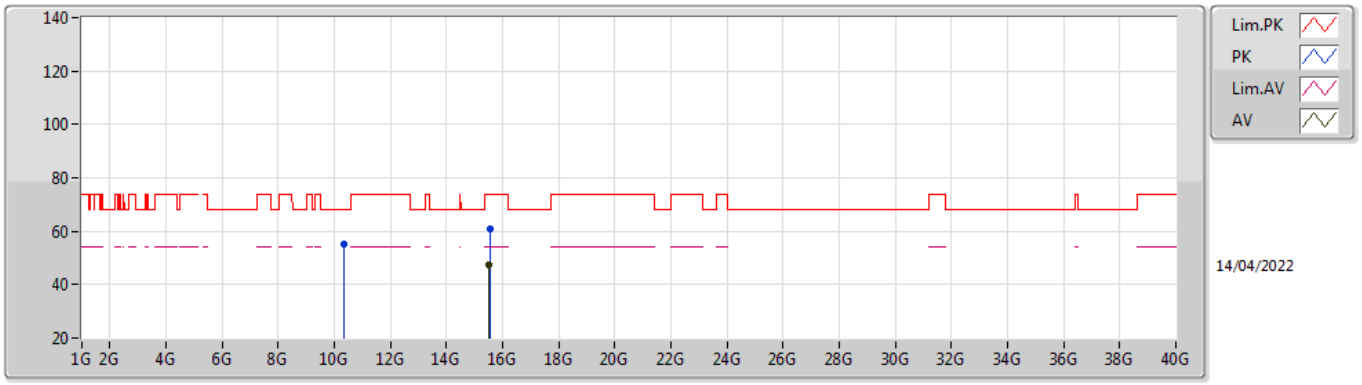


EUT X_1TX
Setting 17.25
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.3512G	55.08	68.20	-13.12	41.97	3	Horizontal	214	1.58	-	38.15	10.55	35.59
PK	15.53568G	60.66	74.00	-13.34	44.44	3	Horizontal	88	1.66	-	38.45	13.17	35.40
AV	15.53056G	47.32	54.00	-6.68	31.06	3	Horizontal	88	1.66	-	38.49	13.17	35.40

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

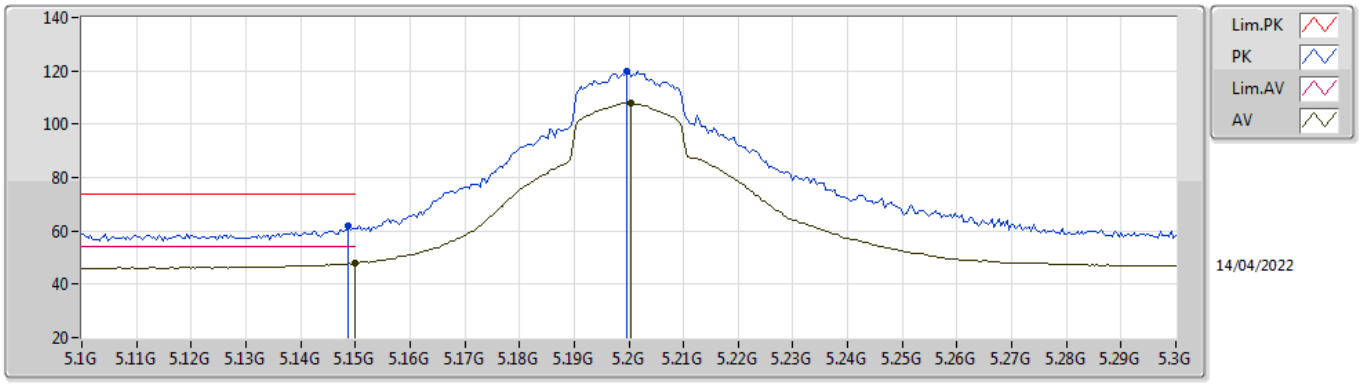


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1488G	61.68	74.00	-12.32	55.85	3	Vertical	78	1.56	-	34.00	7.17	35.34
AV	5.15G	47.79	54.00	-6.21	41.96	3	Vertical	78	1.56	-	34.00	7.17	35.34
PK	5.1996G	119.75	Inf	-Inf	113.69	3	Vertical	78	1.56	-	34.20	7.20	35.34
AV	5.2004G	107.90	Inf	-Inf	101.84	3	Vertical	78	1.56	-	34.20	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

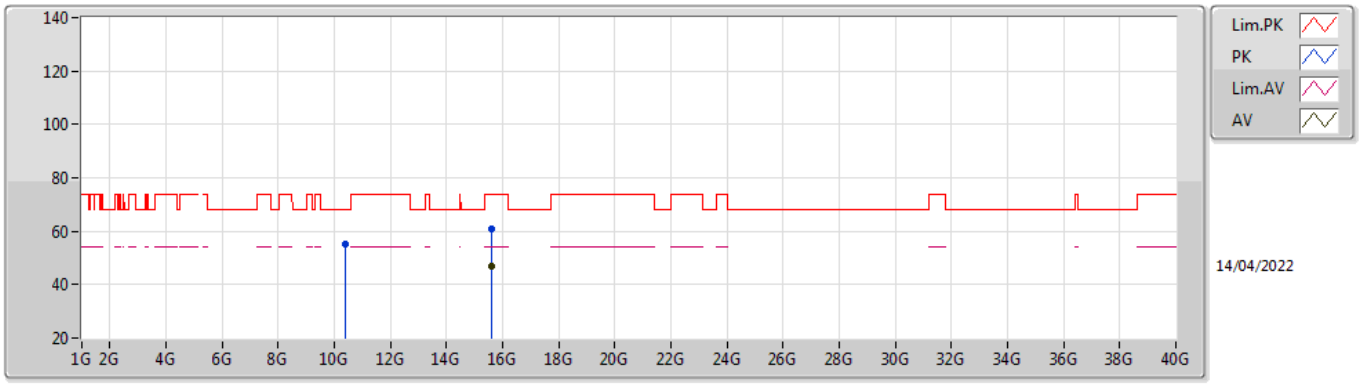


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.3994G	55.34	68.20	-12.86	42.13	3	Vertical	326	1.82	-	38.20	10.56	35.55
PK	15.59952G	60.82	74.00	-13.18	45.07	3	Vertical	177	2.93	-	38.00	13.20	35.45
AV	15.59736G	47.06	54.00	-6.94	31.29	3	Vertical	177	2.93	-	38.02	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

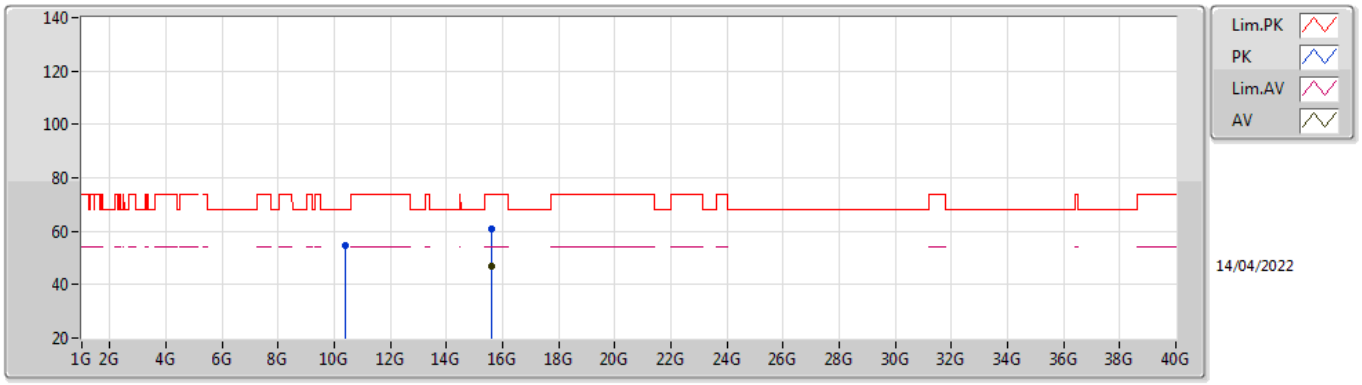


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.3942G	54.69	68.20	-13.51	41.49	3	Horizontal	285	1.72	-	38.19	10.56	35.55
PK	15.603G	61.06	74.00	-12.94	45.34	3	Horizontal	116	1.97	-	37.98	13.20	35.46
AV	15.59296G	47.05	54.00	-6.95	31.25	3	Horizontal	116	1.97	-	38.05	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

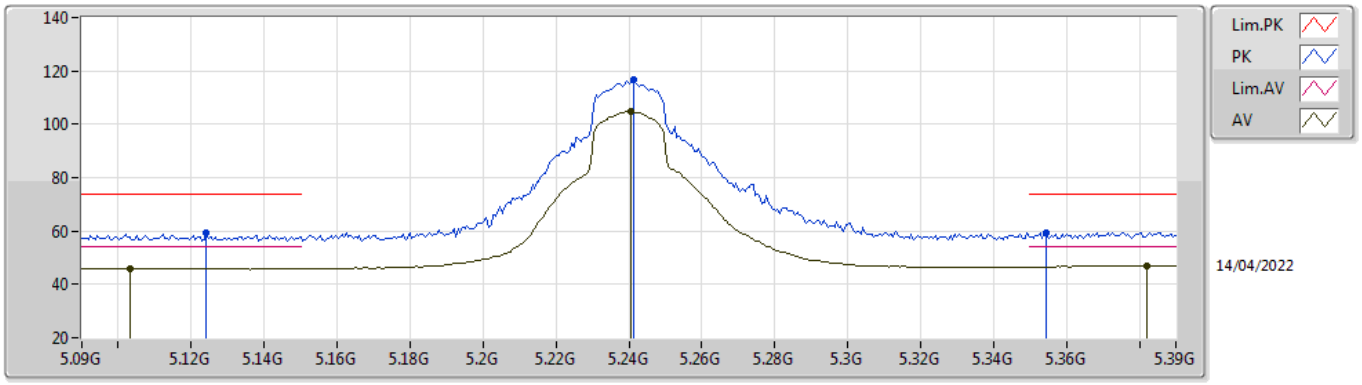


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1242G	59.13	74.00	-14.87	53.35	3	Vertical	250	1.78	-	33.95	7.16	35.33
AV	5.1032G	46.00	54.00	-8.00	40.27	3	Vertical	250	1.78	-	33.91	7.15	35.33
PK	5.2412G	116.47	Inf	-Inf	110.25	3	Vertical	250	1.78	-	34.36	7.20	35.34
AV	5.2406G	104.96	Inf	-Inf	98.74	3	Vertical	250	1.78	-	34.36	7.20	35.34
PK	5.3546G	59.55	74.00	-14.45	53.18	3	Vertical	250	1.78	-	34.51	7.20	35.34
AV	5.3822G	47.04	54.00	-6.96	40.63	3	Vertical	250	1.78	-	34.56	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

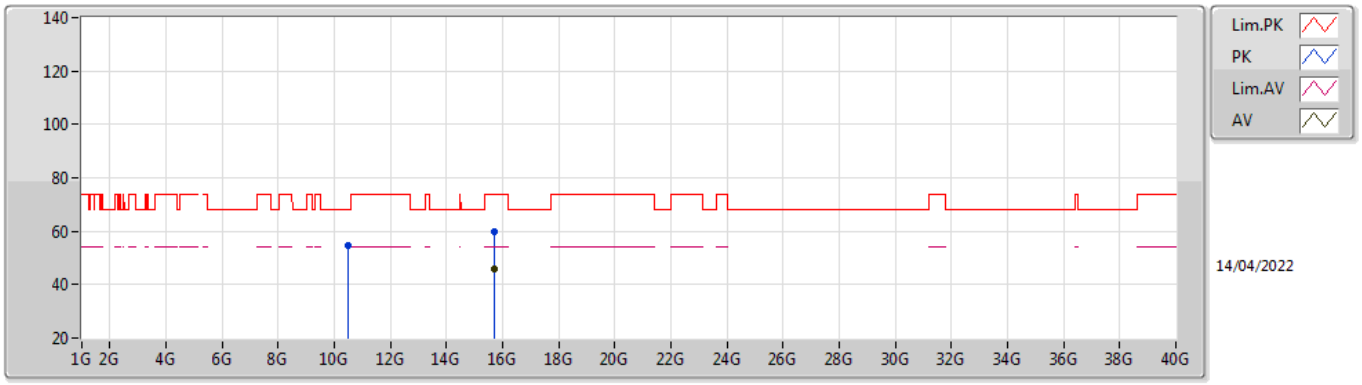


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.48384G	54.63	68.20	-13.57	41.34	3	Vertical	115	1.63	-	38.20	10.57	35.48
PK	15.7272G	59.80	74.00	-14.20	44.49	3	Vertical	328	1.83	-	37.61	13.26	35.56
AV	15.72944G	46.12	54.00	-7.88	30.80	3	Vertical	328	1.83	-	37.62	13.26	35.56

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

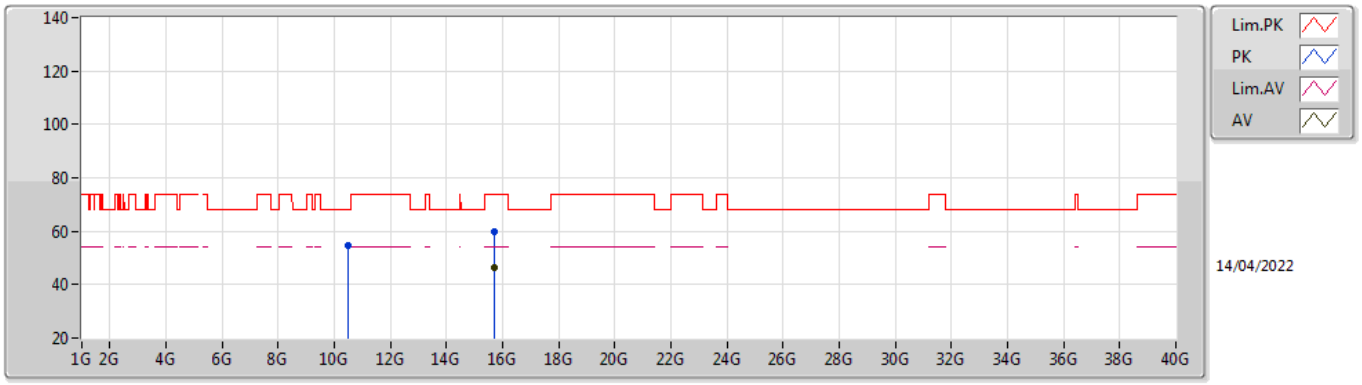


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.48496G	54.88	68.20	-13.32	41.59	3	Horizontal	226	2.38	-	38.20	10.57	35.48
PK	15.72008G	59.58	74.00	-14.42	44.29	3	Horizontal	185	2.61	-	37.58	13.26	35.55
AV	15.71972G	46.18	54.00	-7.82	30.89	3	Horizontal	185	2.61	-	37.58	13.26	35.55

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

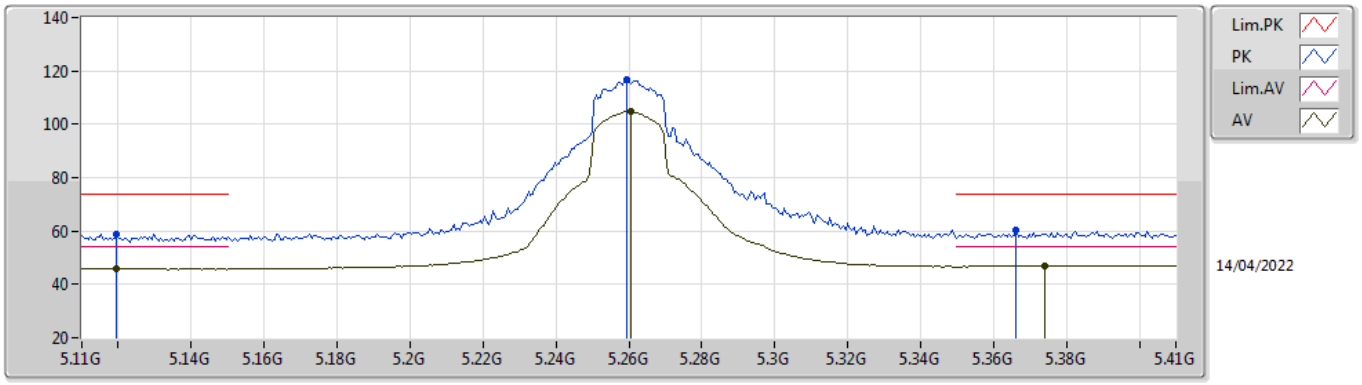


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1196G	58.64	74.00	-15.36	52.87	3	Vertical	250	1.91	-	33.94	7.16	35.33
AV	5.1196G	45.92	54.00	-8.08	40.15	3	Vertical	250	1.91	-	33.94	7.16	35.33
PK	5.2594G	116.95	Inf	-Inf	110.67	3	Vertical	250	1.91	-	34.42	7.20	35.34
AV	5.2606G	104.84	Inf	-Inf	98.56	3	Vertical	250	1.91	-	34.42	7.20	35.34
PK	5.3662G	60.38	74.00	-13.62	53.99	3	Vertical	250	1.91	-	34.53	7.20	35.34
AV	5.374G	47.12	54.00	-6.88	40.71	3	Vertical	250	1.91	-	34.55	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

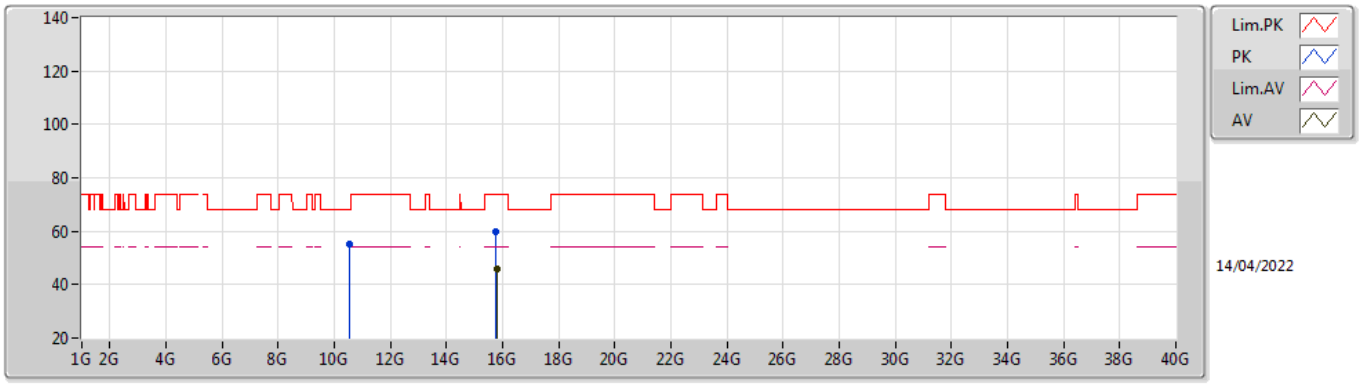


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.5186G	54.93	68.20	-13.27	41.60	3	Vertical	144	2.94	-	38.20	10.58	35.45
PK	15.77744G	59.78	74.00	-14.22	44.28	3	Vertical	87	2.14	-	37.81	13.29	35.60
AV	15.78776G	45.92	54.00	-8.08	30.39	3	Vertical	87	2.14	-	37.85	13.29	35.61

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

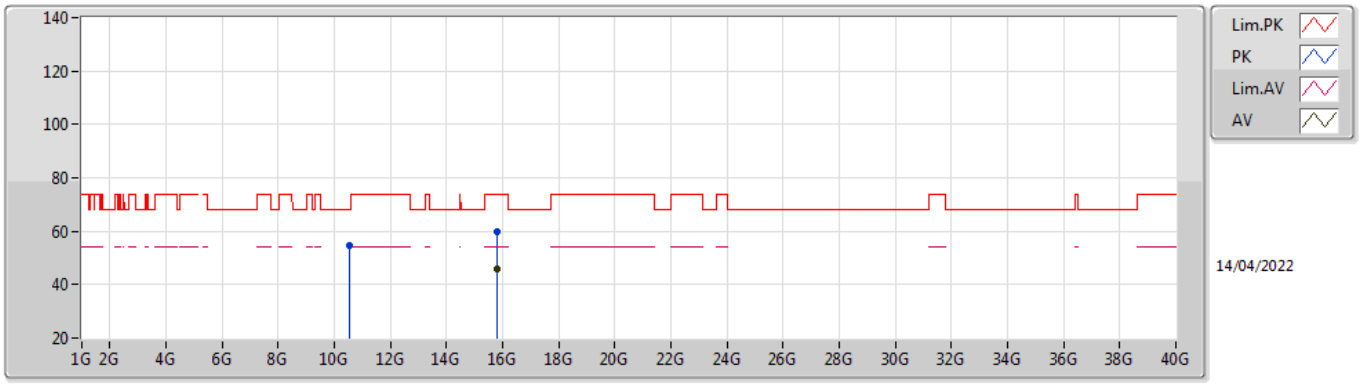


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.52116G	54.62	68.20	-13.58	41.29	3	Horizontal	38	2.55	-	38.20	10.58	35.45
PK	15.78712G	59.65	74.00	-14.35	44.12	3	Horizontal	290	2.05	-	37.85	13.29	35.61
AV	15.78444G	45.83	54.00	-8.17	30.31	3	Horizontal	290	2.05	-	37.84	13.29	35.61

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

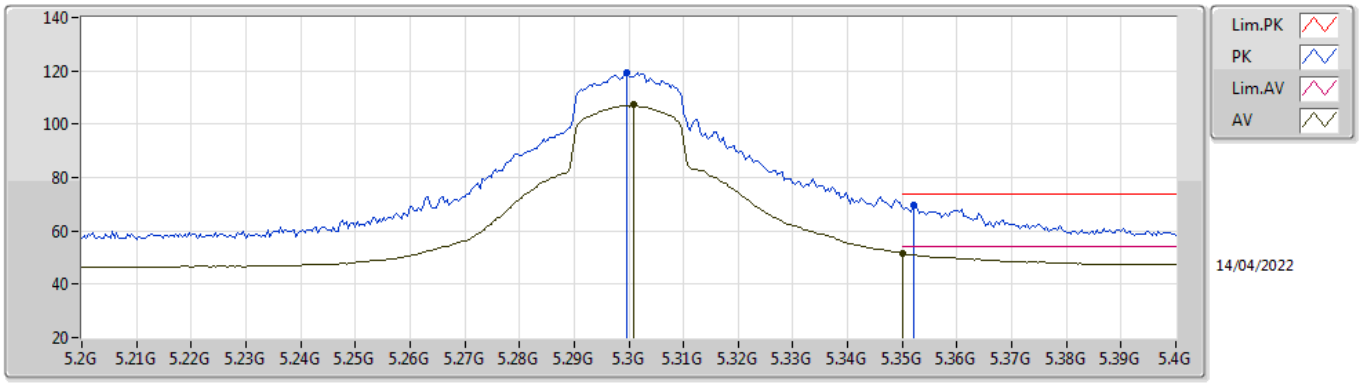


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2996G	119.19	Inf	-Inf	112.83	3	Vertical	79	1.56	-	34.50	7.20	35.34
AV	5.3008G	107.21	Inf	-Inf	100.85	3	Vertical	79	1.56	-	34.50	7.20	35.34
PK	5.352G	69.55	74.00	-4.45	63.19	3	Vertical	79	1.56	-	34.50	7.20	35.34
AV	5.35G	51.45	54.00	-2.55	45.09	3	Vertical	79	1.56	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

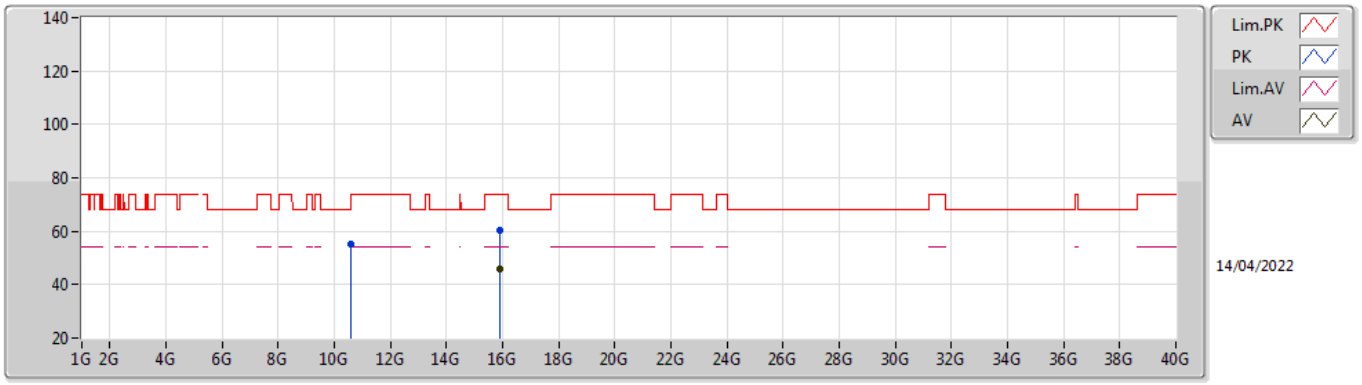


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.5964G	54.92	68.20	-13.28	41.52	3	Vertical	119	1.17	-	38.20	10.59	35.39
PK	15.89132G	60.44	74.00	-13.56	45.16	3	Vertical	98	2.33	-	37.63	13.35	35.70
AV	15.90928G	46.12	54.00	-7.88	30.90	3	Vertical	98	2.33	-	37.58	13.35	35.71

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

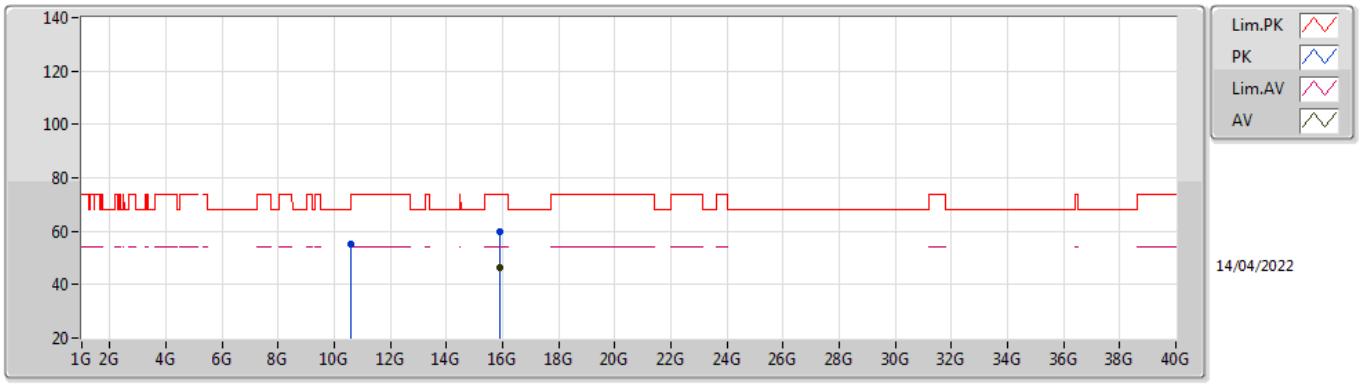


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.59068G	55.43	68.20	-12.77	42.03	3	Horizontal	195	1.85	-	38.20	10.59	35.39
PK	15.90028G	59.77	74.00	-14.23	44.53	3	Horizontal	18	1.70	-	37.60	13.35	35.71
AV	15.9096G	46.16	54.00	-7.84	30.94	3	Horizontal	18	1.70	-	37.58	13.35	35.71

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

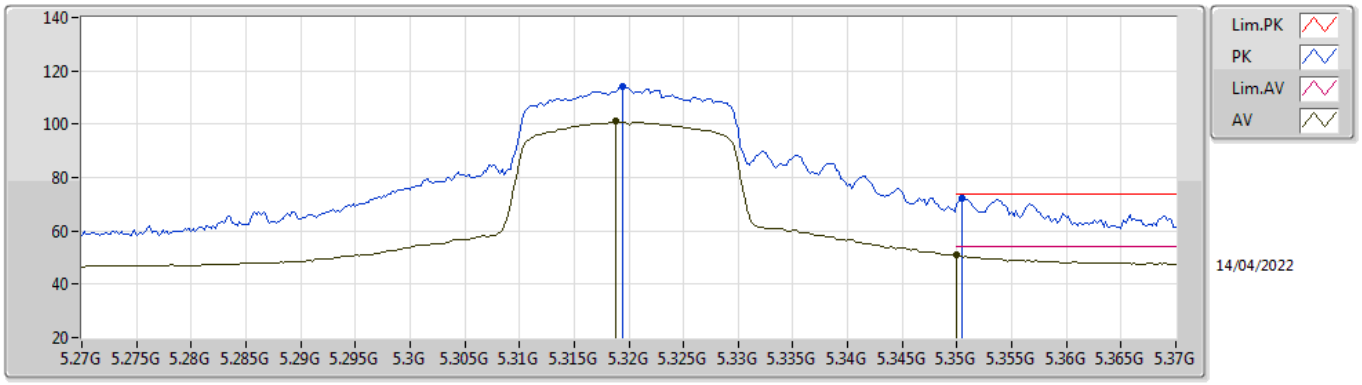


EUT X_1TX
Setting 16.75
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3194G	114.09	Inf	-Inf	107.73	3	Vertical	251	1.85	-	34.50	7.20	35.34
AV	5.3188G	101.00	Inf	-Inf	94.64	3	Vertical	251	1.85	-	34.50	7.20	35.34
PK	5.3504G	72.48	74.00	-1.52	66.12	3	Vertical	251	1.85	-	34.50	7.20	35.34
AV	5.35G	50.78	54.00	-3.22	44.42	3	Vertical	251	1.85	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

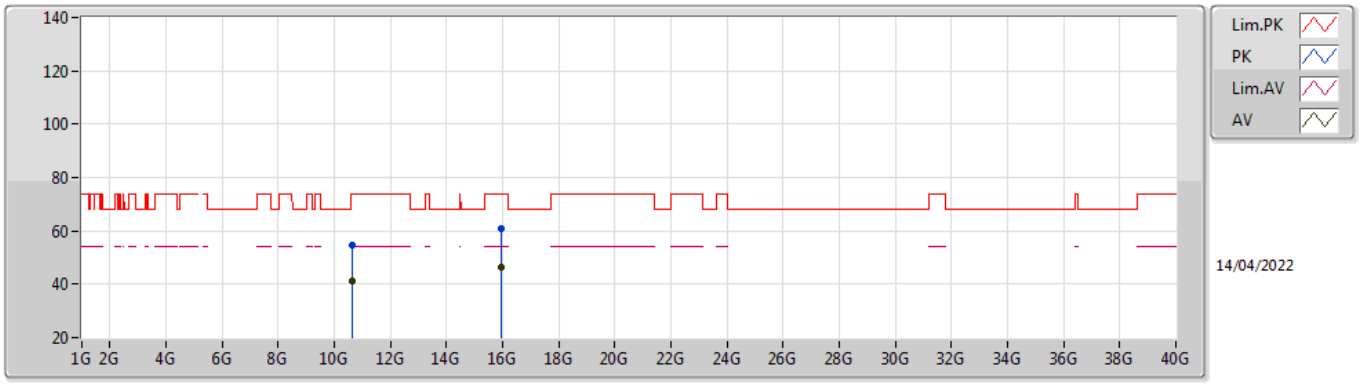


EUT X_1TX
Setting 16.75
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.63924G	54.63	74.00	-19.37	41.10	3	Vertical	209	1.92	-	38.28	10.60	35.35
AV	10.6466G	40.96	54.00	-13.04	27.41	3	Vertical	209	1.92	-	38.29	10.60	35.34
PK	15.96372G	60.65	74.00	-13.35	45.56	3	Vertical	351	2.43	-	37.47	13.38	35.76
AV	15.95456G	46.23	54.00	-7.77	31.11	3	Vertical	351	2.43	-	37.49	13.38	35.75

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

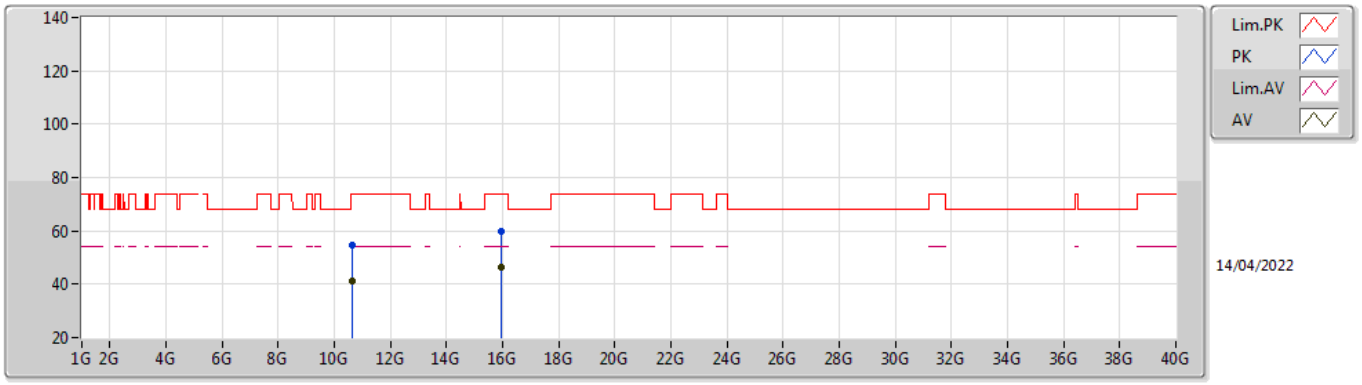


EUT X_1TX
Setting 16.75
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.63048G	54.82	74.00	-19.18	41.33	3	Horizontal	38	2.12	-	38.26	10.59	35.36
AV	10.6482G	40.99	54.00	-13.01	27.43	3	Horizontal	38	2.12	-	38.30	10.60	35.34
PK	15.96292G	59.99	74.00	-14.01	44.90	3	Horizontal	163	2.89	-	37.47	13.38	35.76
AV	15.95272G	46.25	54.00	-7.75	31.13	3	Horizontal	163	2.89	-	37.49	13.38	35.75

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

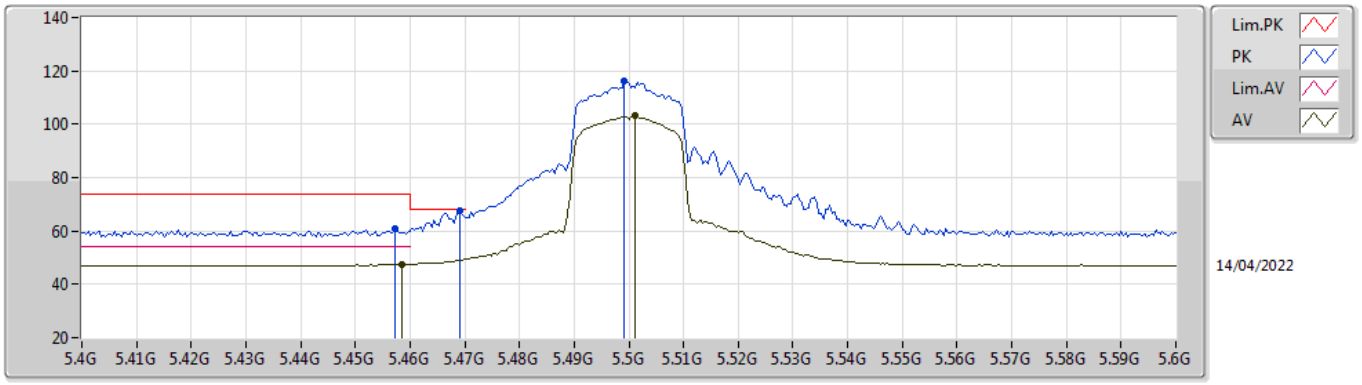


EUT X_1TX
Setting 17.25
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4572G	61.00	74.00	-13.00	54.58	3	Vertical	253	1.68	-	34.51	7.26	35.35
AV	5.4584G	47.48	54.00	-6.52	41.05	3	Vertical	253	1.68	-	34.52	7.26	35.35
PK	5.4692G	67.82	68.20	-0.38	61.36	3	Vertical	253	1.68	-	34.54	7.27	35.35
PK	5.4992G	115.99	Inf	-Inf	109.44	3	Vertical	253	1.68	-	34.60	7.30	35.35
AV	5.5012G	103.03	Inf	-Inf	96.48	3	Vertical	253	1.68	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

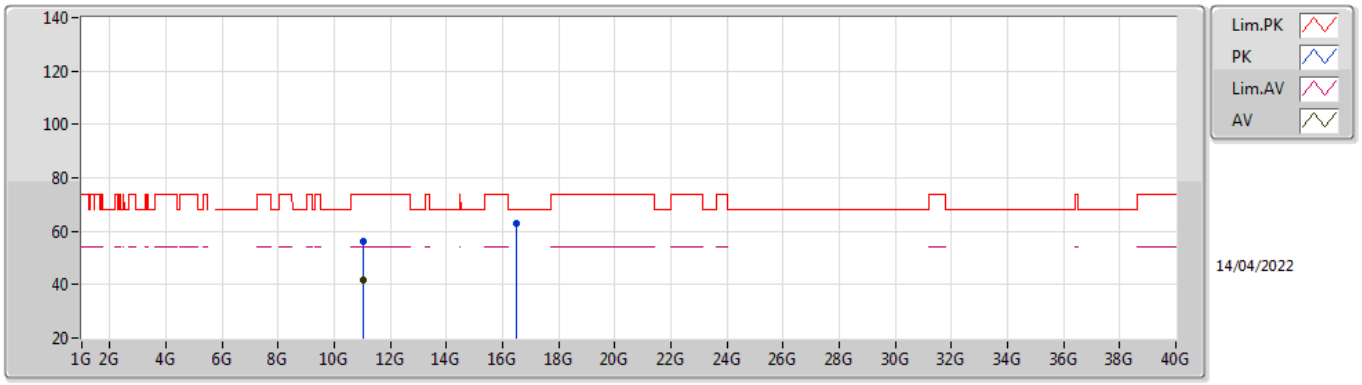


EUT X_1TX
Setting 17.25
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.00876G	56.02	74.00	-17.98	42.01	3	Vertical	20	2.23	-	38.41	10.65	35.05
AV	11.0098G	41.74	54.00	-12.26	27.73	3	Vertical	20	2.23	-	38.41	10.65	35.05
PK	16.49136G	62.91	68.20	-5.29	46.20	3	Vertical	88	1.55	-	38.34	13.74	35.37

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

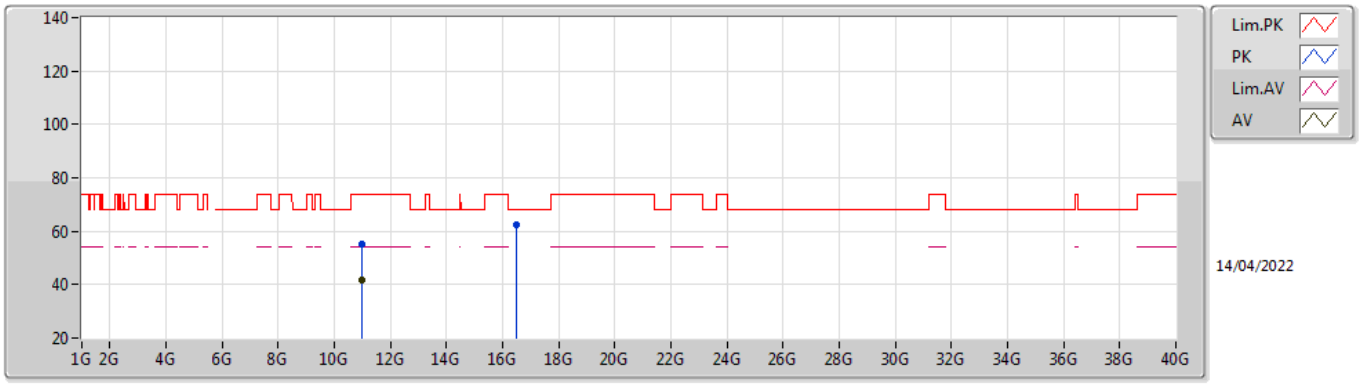


EUT X_1TX
Setting 17.25
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.00804G	55.10	74.00	-18.90	41.09	3	Horizontal	9	1.03	-	38.41	10.65	35.05
AV	11.00692G	41.75	54.00	-12.25	27.74	3	Horizontal	9	1.03	-	38.41	10.65	35.05
PK	16.50072G	62.26	68.20	-5.94	45.47	3	Horizontal	344	2.42	-	38.40	13.75	35.36

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

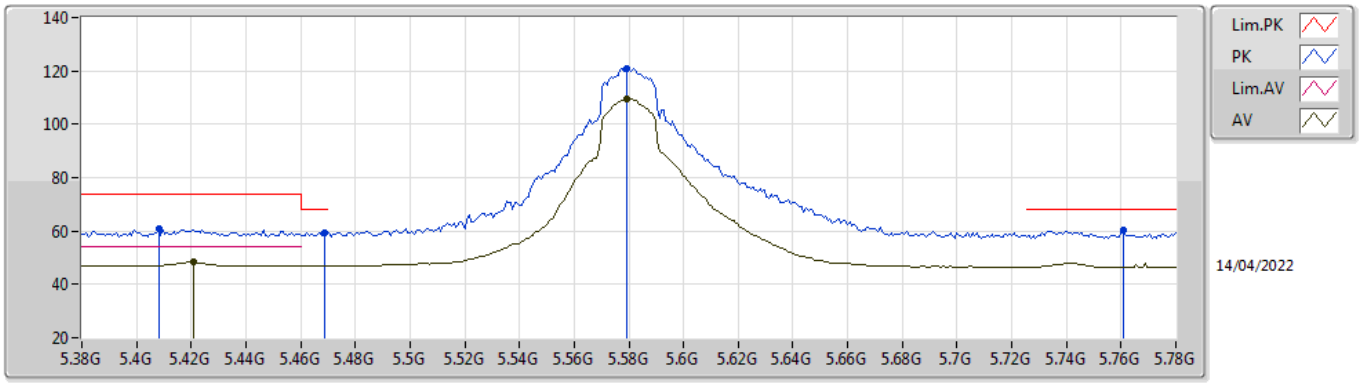


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.408G	60.73	74.00	-13.27	54.29	3	Vertical	79	1.36	-	34.58	7.21	35.35
AV	5.4208G	48.37	54.00	-5.63	41.94	3	Vertical	79	1.36	-	34.56	7.22	35.35
PK	5.4688G	59.42	68.20	-8.78	52.96	3	Vertical	79	1.36	-	34.54	7.27	35.35
PK	5.5792G	121.05	Inf	-Inf	114.46	3	Vertical	79	1.36	-	34.60	7.38	35.39
AV	5.5792G	109.55	Inf	-Inf	102.96	3	Vertical	79	1.36	-	34.60	7.38	35.39
PK	5.7608G	60.58	68.20	-7.62	54.46	3	Vertical	79	1.36	-	34.20	7.40	35.48

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

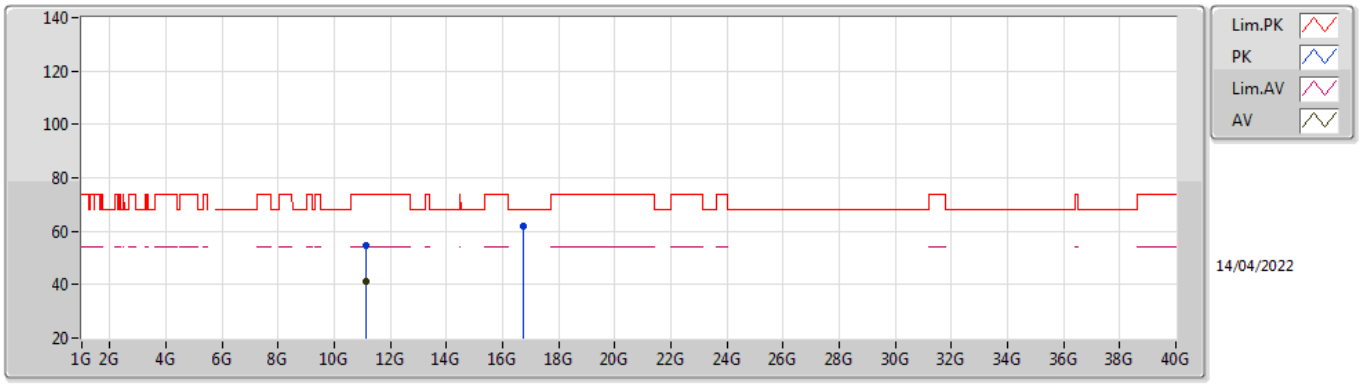


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.15488G	54.66	74.00	-19.34	40.65	3	Vertical	101	1.64	-	38.55	10.67	35.21
AV	11.15068G	41.21	54.00	-12.79	27.20	3	Vertical	101	1.64	-	38.55	10.67	35.21
PK	16.73652G	62.07	68.20	-6.13	44.31	3	Vertical	211	2.07	-	38.96	13.92	35.12

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

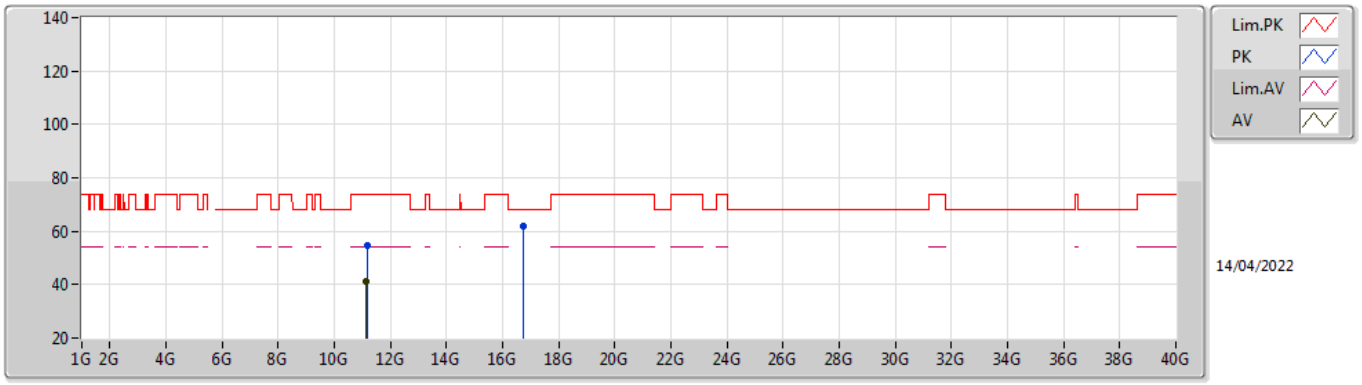


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.157G	54.66	74.00	-19.34	40.65	3	Horizontal	193	1.54	-	38.56	10.67	35.22
AV	11.15092G	41.21	54.00	-12.79	27.20	3	Horizontal	193	1.54	-	38.55	10.67	35.21
PK	16.74236G	62.04	68.20	-6.16	44.24	3	Horizontal	244	1.31	-	39.00	13.92	35.12

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

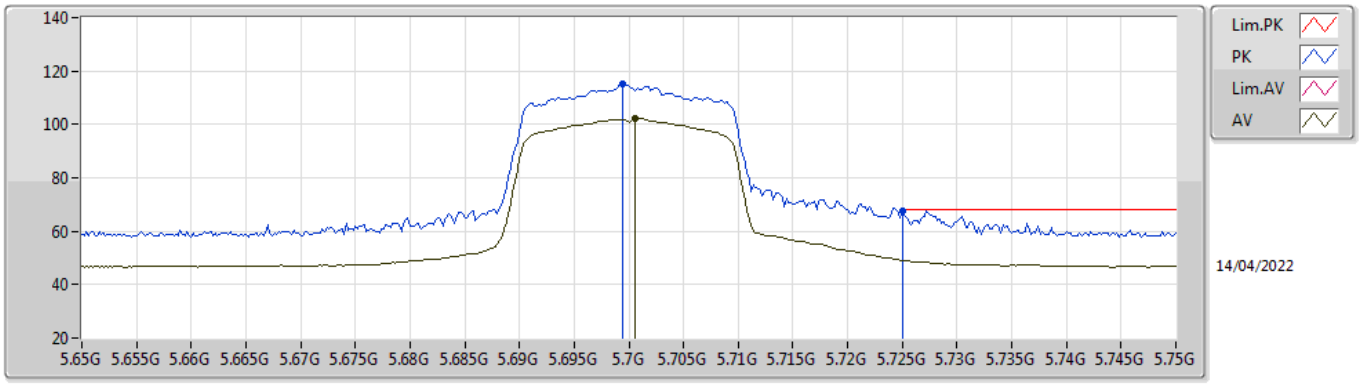


EUT X_1TX
Setting 14
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6994G	114.97	Inf	-Inf	108.72	3	Vertical	78	1.26	-	34.30	7.40	35.45
AV	5.7006G	102.20	Inf	-Inf	95.95	3	Vertical	78	1.26	-	34.30	7.40	35.45
PK	5.725G	67.63	68.20	-0.57	61.44	3	Vertical	78	1.26	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

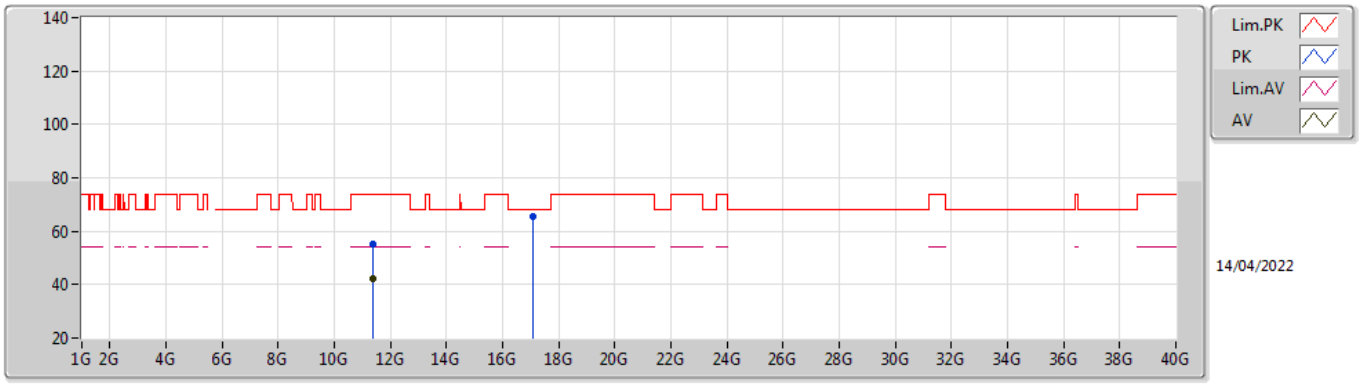


EUT X_1TX
Setting 14
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.39596G	55.40	74.00	-18.60	41.37	3	Vertical	47	2.33	-	38.80	10.71	35.48
AV	11.3994G	42.02	54.00	-11.98	28.00	3	Vertical	47	2.33	-	38.80	10.71	35.49
PK	17.09088G	65.71	68.20	-2.49	46.25	3	Vertical	6	1.35	-	40.17	14.16	34.87

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

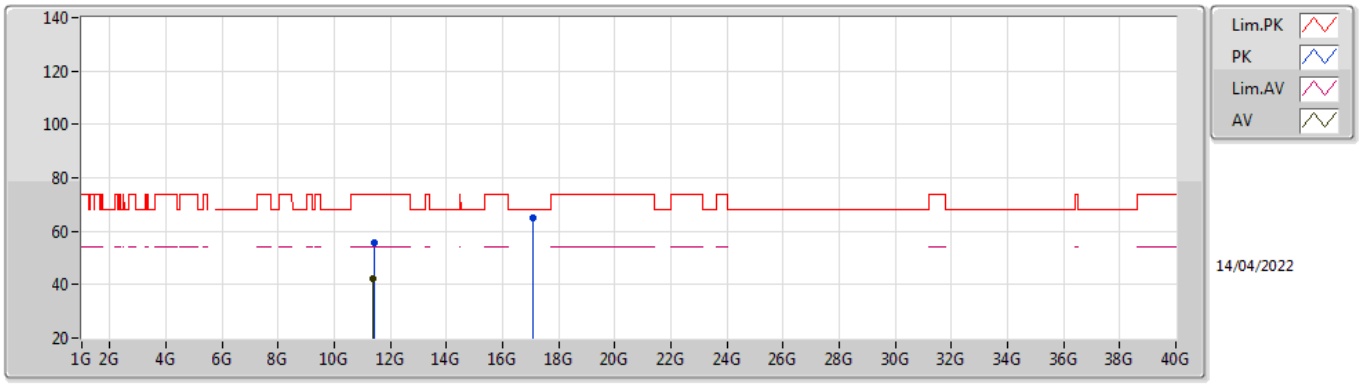


EUT X_1TX
Setting 14
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.40424G	55.67	74.00	-18.33	41.64	3	Horizontal	101	2.06	-	38.81	10.71	35.49
AV	11.39948G	42.00	54.00	-12.00	27.98	3	Horizontal	101	2.06	-	38.80	10.71	35.49
PK	17.0932G	65.10	68.20	-3.10	45.62	3	Horizontal	143	2.11	-	40.18	14.17	34.87

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

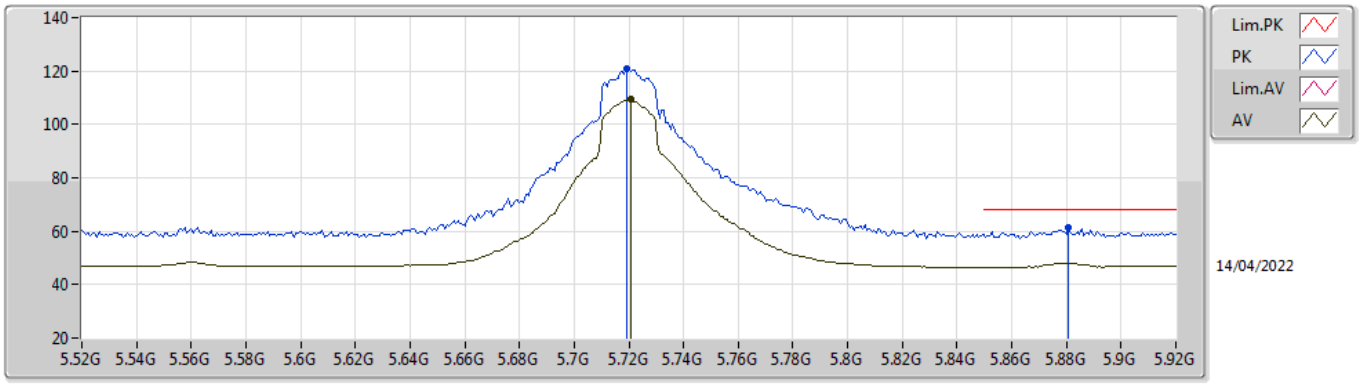


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7192G	120.82	Inf	-Inf	114.62	3	Vertical	78	1.41	-	34.26	7.40	35.46
AV	5.7208G	109.32	Inf	-Inf	103.12	3	Vertical	78	1.41	-	34.26	7.40	35.46
PK	5.8808G	61.35	68.20	-6.85	54.93	3	Vertical	78	1.41	-	34.48	7.48	35.54

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

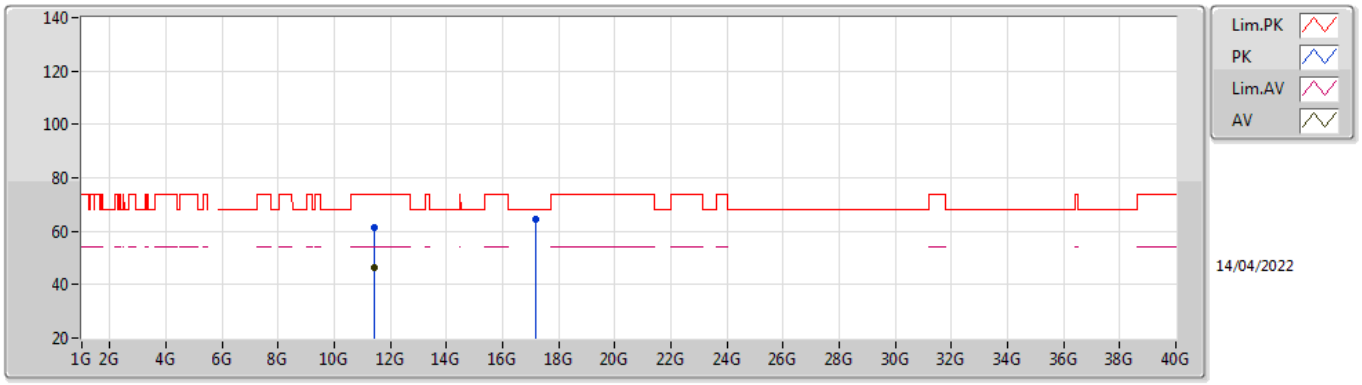


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4396G	61.20	74.00	-12.80	47.13	3	Vertical	172	2.46	-	38.88	10.72	35.53
AV	11.43744G	46.62	54.00	-7.38	32.56	3	Vertical	172	2.46	-	38.87	10.72	35.53
PK	17.15636G	64.72	68.20	-3.48	44.96	3	Vertical	188	2.75	-	40.43	14.21	34.88

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

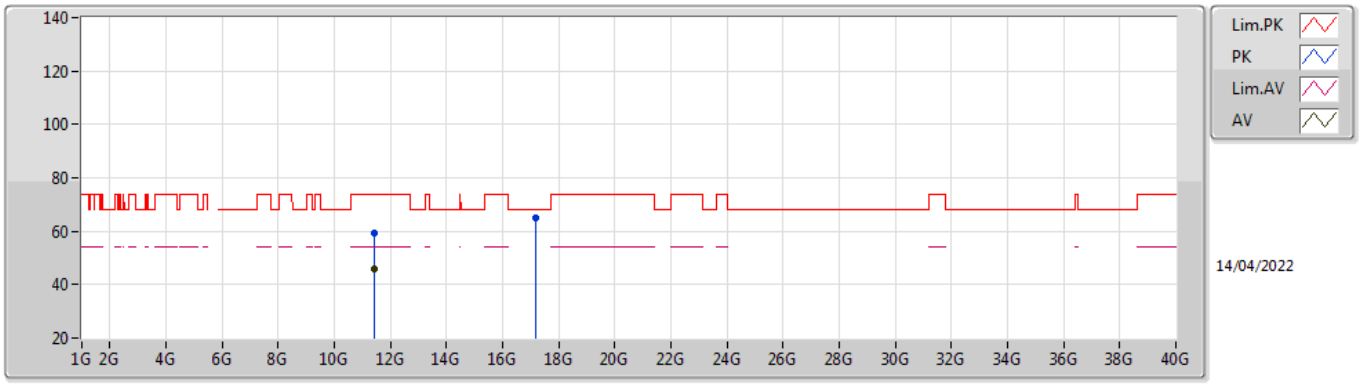


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.44596G	59.53	74.00	-14.47	45.46	3	Horizontal	132	2.04	-	38.89	10.72	35.54
AV	11.43744G	45.79	54.00	-8.21	31.73	3	Horizontal	132	2.04	-	38.87	10.72	35.53
PK	17.15888G	64.98	68.20	-3.22	45.21	3	Horizontal	140	2.52	-	40.44	14.21	34.88

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

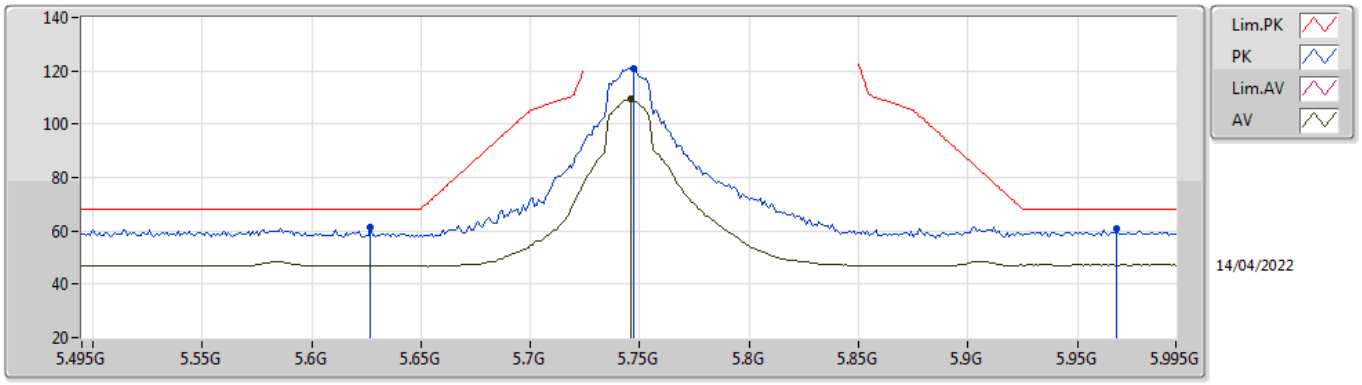


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.627G	61.23	68.20	-6.97	54.69	3	Vertical	78	1.34	-	34.55	7.40	35.41
PK	5.747G	120.96	Inf	-Inf	114.82	3	Vertical	78	1.34	-	34.21	7.40	35.47
AV	5.746G	109.35	Inf	-Inf	103.21	3	Vertical	78	1.34	-	34.21	7.40	35.47
PK	5.968G	60.62	68.20	-7.58	53.83	3	Vertical	78	1.34	-	34.80	7.57	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

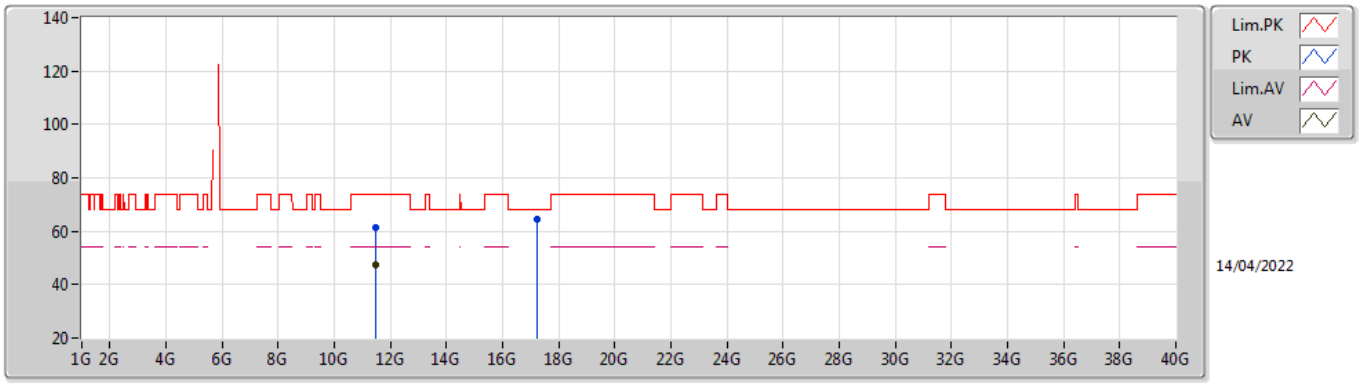


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.49236G	61.25	74.00	-12.75	47.14	3	Vertical	172	2.49	-	38.98	10.72	35.59
AV	11.48728G	47.31	54.00	-6.69	33.21	3	Vertical	172	2.49	-	38.97	10.72	35.59
PK	17.23536G	64.61	68.20	-3.59	44.42	3	Vertical	1	1.84	-	40.81	14.26	34.88

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

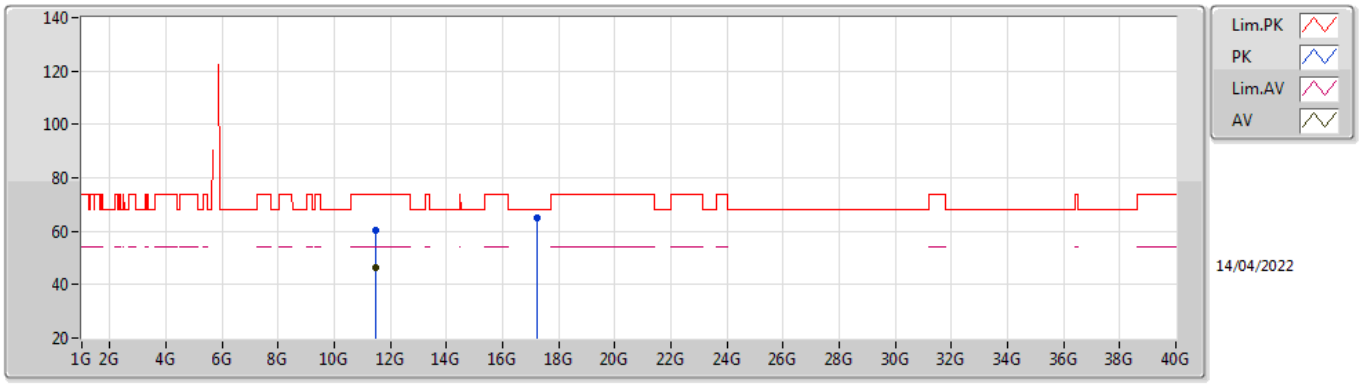


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4916G	60.31	74.00	-13.69	46.20	3	Horizontal	187	2.11	-	38.98	10.72	35.59
AV	11.48748G	46.22	54.00	-7.78	32.12	3	Horizontal	187	2.11	-	38.97	10.72	35.59
PK	17.22992G	65.17	68.20	-3.03	45.01	3	Horizontal	82	1.17	-	40.78	14.26	34.88

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

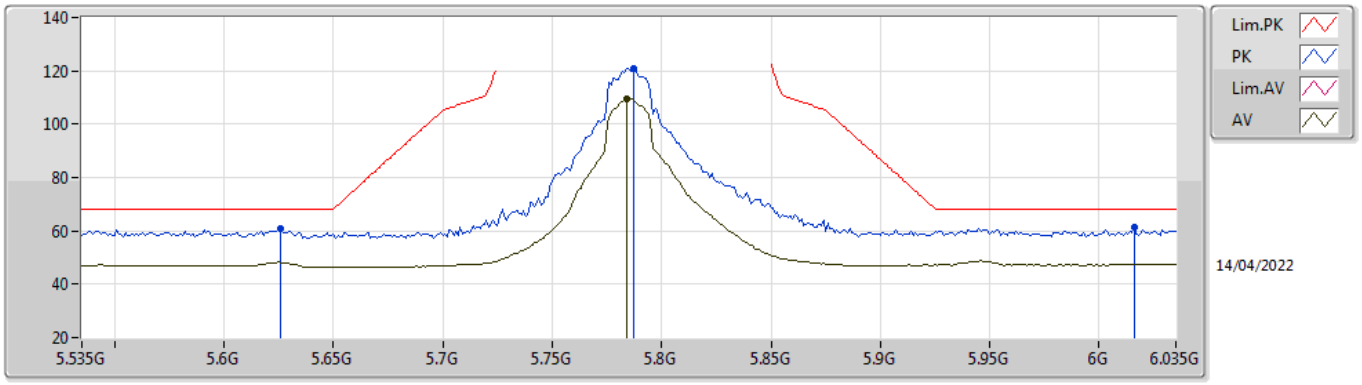


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.626G	60.94	68.20	-7.26	54.40	3	Vertical	78	1.30	-	34.55	7.40	35.41
PK	5.787G	120.84	Inf	-Inf	114.73	3	Vertical	78	1.30	-	34.20	7.40	35.49
AV	5.784G	109.43	Inf	-Inf	103.32	3	Vertical	78	1.30	-	34.20	7.40	35.49
PK	6.016G	61.26	68.20	-6.94	54.41	3	Vertical	78	1.30	-	34.83	7.61	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

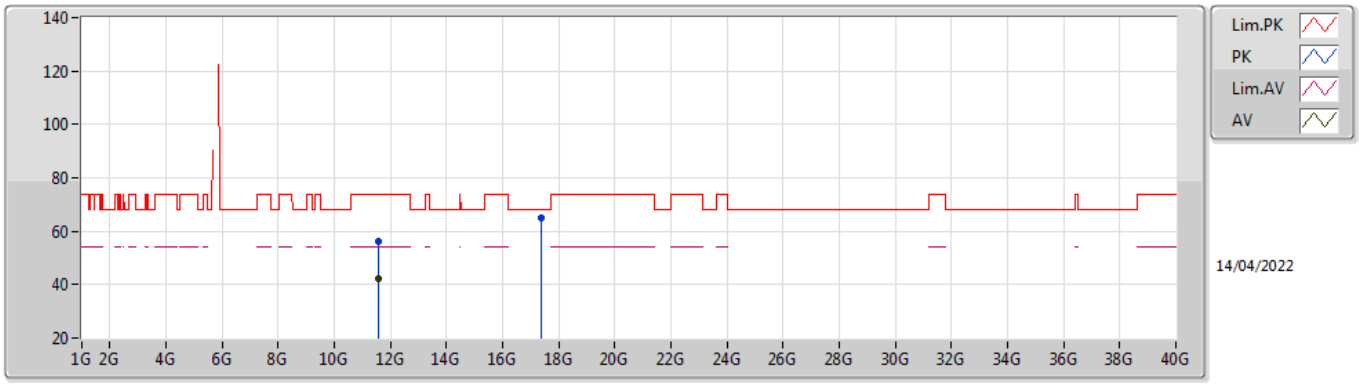


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.58G	56.45	74.00	-17.55	41.97	3	Vertical	297	2.07	-	39.32	10.74	35.58
AV	11.5774G	42.27	54.00	-11.73	27.80	3	Vertical	297	2.07	-	39.31	10.74	35.58
PK	17.3596G	64.82	68.20	-3.38	43.93	3	Vertical	57	2.38	-	41.44	14.35	34.90

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

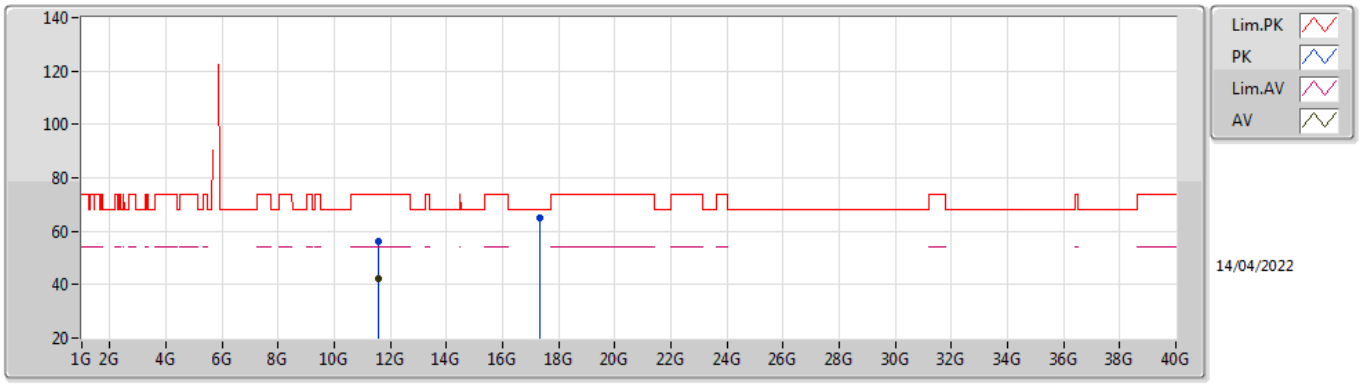


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.57672G	56.03	74.00	-17.97	41.56	3	Horizontal	146	1.92	-	39.31	10.74	35.58
AV	11.57452G	42.09	54.00	-11.91	27.63	3	Horizontal	146	1.92	-	39.30	10.74	35.58
PK	17.34556G	64.85	68.20	-3.35	44.02	3	Horizontal	287	2.79	-	41.38	14.34	34.89

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

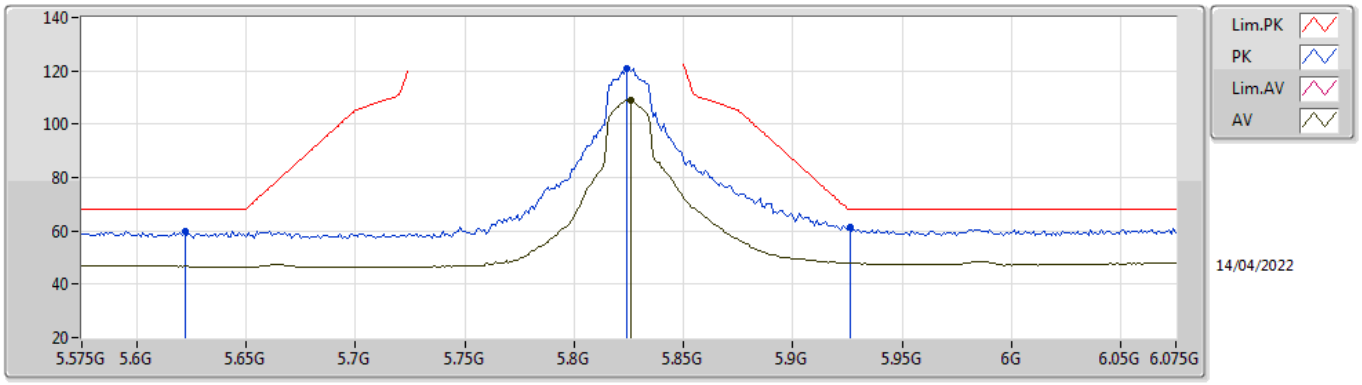


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.622G	59.87	68.20	-8.33	53.32	3	Vertical	79	1.26	-	34.56	7.40	35.41
PK	5.824G	120.97	Inf	-Inf	114.81	3	Vertical	79	1.26	-	34.25	7.42	35.51
AV	5.826G	109.01	Inf	-Inf	102.84	3	Vertical	79	1.26	-	34.25	7.43	35.51
PK	5.926G	61.37	68.20	-6.83	54.70	3	Vertical	79	1.26	-	34.70	7.53	35.56

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

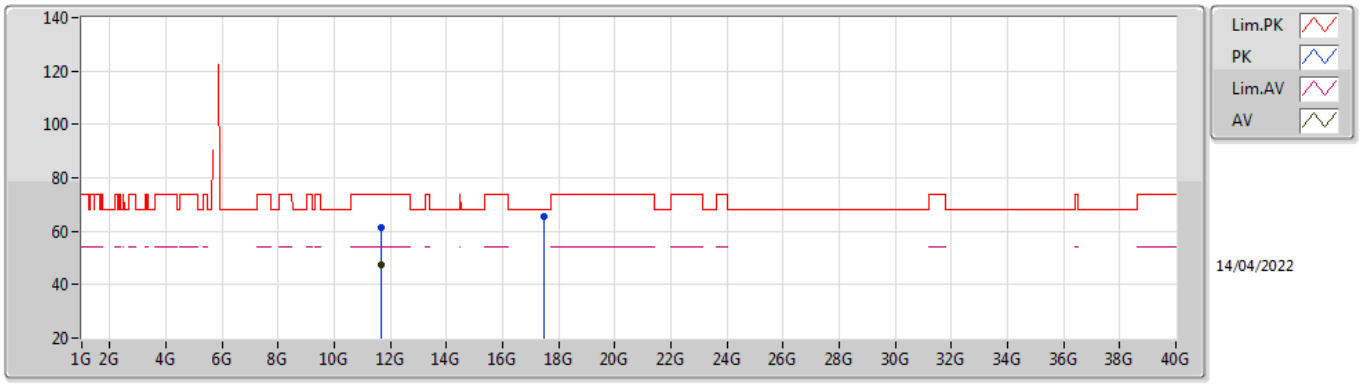


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65312G	61.53	74.00	-12.47	46.95	3	Vertical	165	3.00	-	39.40	10.75	35.57
AV	11.65008G	47.67	54.00	-6.33	33.09	3	Vertical	165	3.00	-	39.40	10.75	35.57
PK	17.47108G	65.46	68.20	-2.74	43.70	3	Vertical	352	2.60	-	42.24	14.43	34.91

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

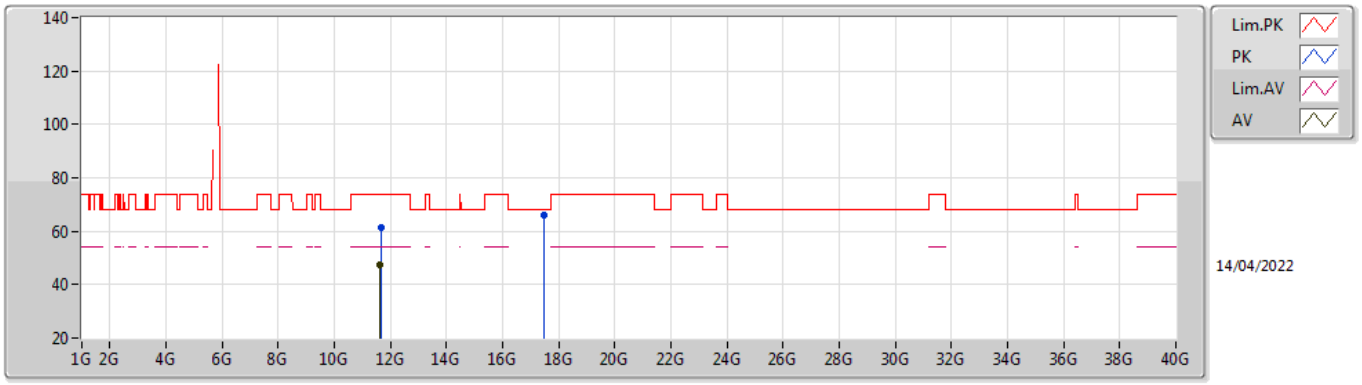


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65356G	61.30	74.00	-12.70	46.72	3	Horizontal	137	2.06	-	39.40	10.75	35.57
AV	11.64732G	47.25	54.00	-6.75	32.67	3	Horizontal	137	2.06	-	39.40	10.75	35.57
PK	17.46848G	65.97	68.20	-2.23	44.23	3	Horizontal	153	1.09	-	42.22	14.43	34.91

802.11ax HEW40_Nss1,(MCS0)_1TX

5190MHz_TnomVnom

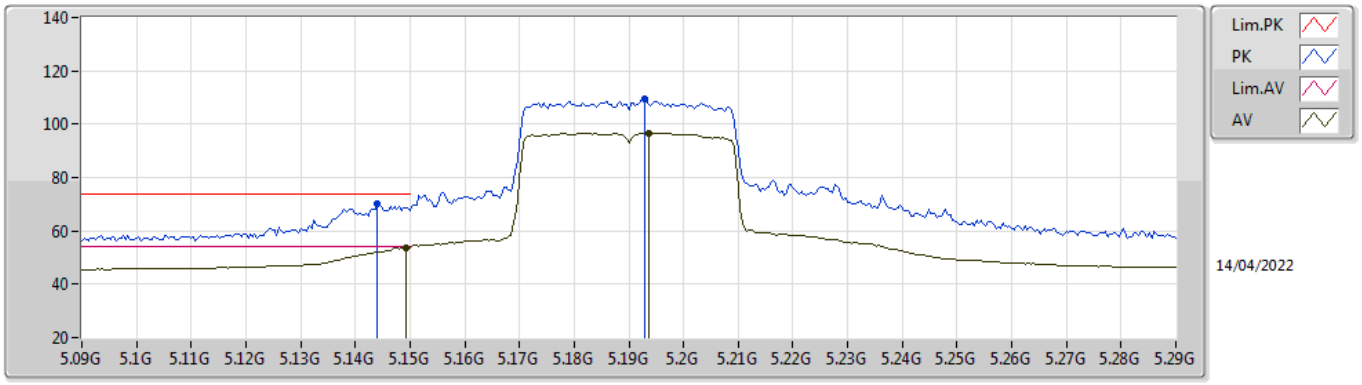


EUT X_1TX
Setting 15.5
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.144G	70.31	74.00	-3.69	64.49	3	Vertical	73	1.43	-	33.99	7.17	35.34
AV	5.1492G	53.80	54.00	-0.20	47.97	3	Vertical	73	1.43	-	34.00	7.17	35.34
PK	5.1928G	109.52	Inf	-Inf	103.49	3	Vertical	73	1.43	-	34.17	7.20	35.34
AV	5.1936G	96.70	Inf	-Inf	90.67	3	Vertical	73	1.43	-	34.17	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5190MHz_TnomVnom

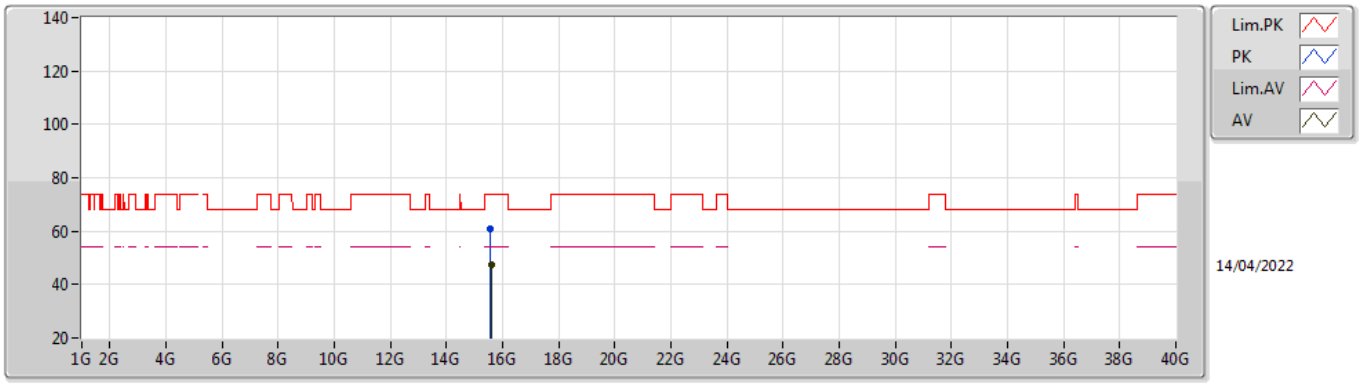


EUT X_1TX
Setting 15.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.57492G	60.88	74.00	-13.12	44.94	3	Vertical	203	1.30	-	38.18	13.19	35.43
AV	15.58434G	47.36	54.00	-6.64	31.50	3	Vertical	203	1.30	-	38.11	13.19	35.44

802.11ax HEW40_Nss1,(MCS0)_1TX

5190MHz_TnomVnom

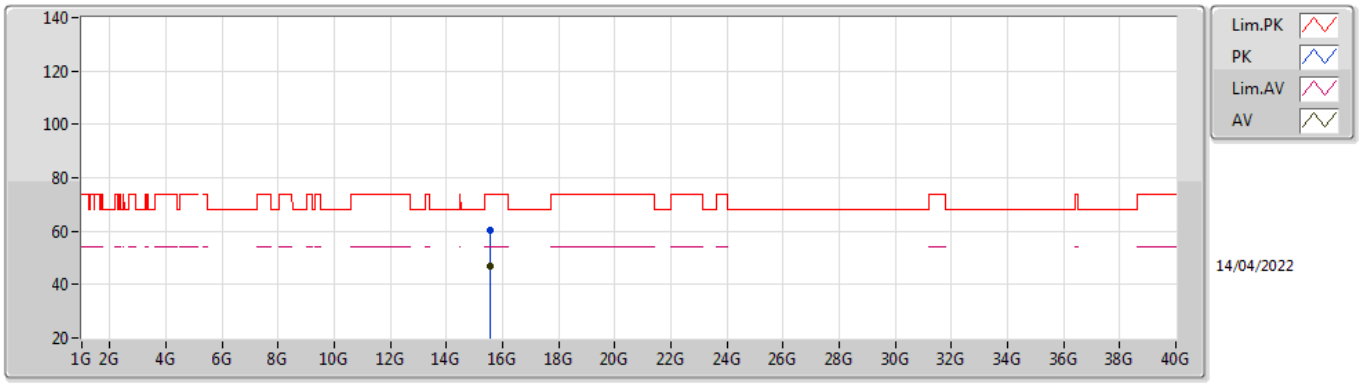


EUT X_1TX
Setting 15.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.57654G	60.34	74.00	-13.66	44.42	3	Horizontal	351	1.94	-	38.16	13.19	35.43
AV	15.5784G	47.00	54.00	-7.00	31.10	3	Horizontal	351	1.94	-	38.15	13.19	35.44

802.11ax HEW40_Nss1,(MCS0)_1TX

5230MHz_TnomVnom

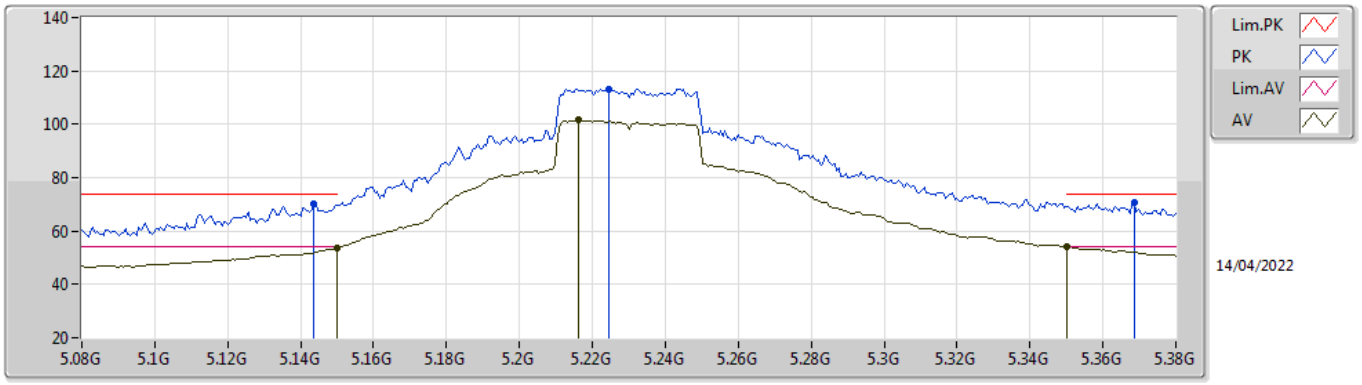


EUT X_1TX
Setting 21.75
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1436G	70.37	74.00	-3.63	64.55	3	Vertical	75	1.31	-	33.99	7.17	35.34
AV	5.15G	53.52	54.00	-0.48	47.69	3	Vertical	75	1.31	-	34.00	7.17	35.34
PK	5.2246G	113.32	Inf	-Inf	107.16	3	Vertical	75	1.31	-	34.30	7.20	35.34
AV	5.2162G	101.55	Inf	-Inf	95.43	3	Vertical	75	1.31	-	34.26	7.20	35.34
PK	5.3686G	70.50	74.00	-3.50	64.10	3	Vertical	75	1.31	-	34.54	7.20	35.34
AV	5.35G	53.99	54.00	-0.01	47.63	3	Vertical	75	1.31	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5230MHz_TnomVnom

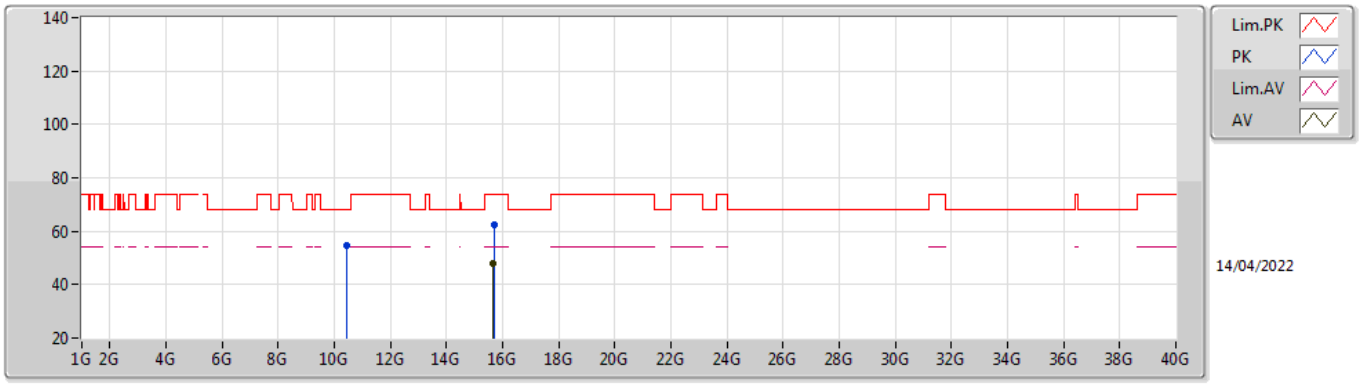


EUT X_1TX
Setting 21.75
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.45094G	54.51	68.20	-13.69	41.25	3	Vertical	139	2.12	-	38.20	10.57	35.51
PK	15.68124G	62.28	74.00	-11.72	46.97	3	Vertical	168	1.96	-	37.59	13.24	35.52
AV	15.67962G	47.84	54.00	-6.16	32.52	3	Vertical	168	1.96	-	37.60	13.24	35.52

802.11ax HEW40_Nss1,(MCS0)_1TX

5230MHz_TnomVnom

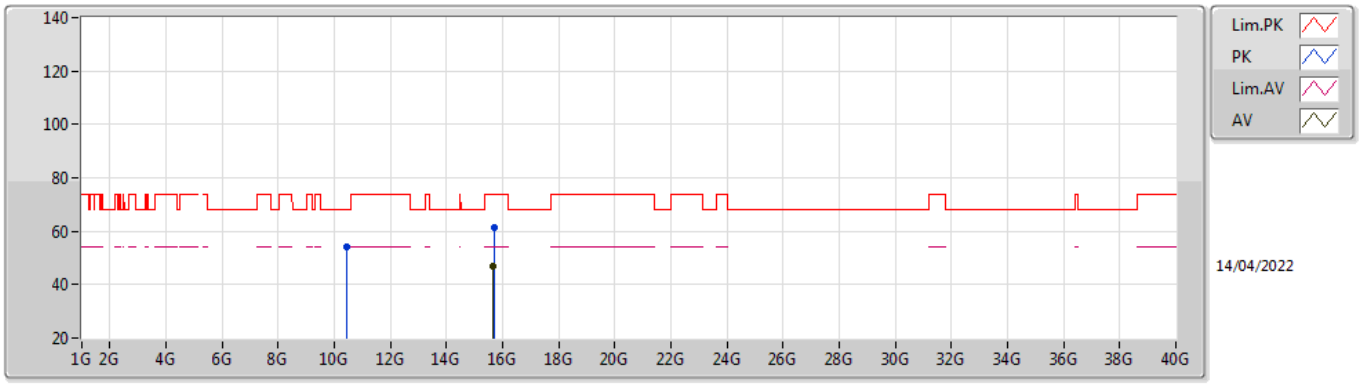


EUT X_1TX
Setting 21.75
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.4636G	54.08	68.20	-14.12	40.81	3	Horizontal	265	2.07	-	38.20	10.57	35.50
PK	15.6867G	61.44	74.00	-12.56	46.16	3	Horizontal	247	1.78	-	37.57	13.24	35.53
AV	15.6774G	47.06	54.00	-6.94	31.73	3	Horizontal	247	1.78	-	37.61	13.24	35.52

802.11ax HEW40_Nss1,(MCS0)_1TX

5270MHz_TnomVnom

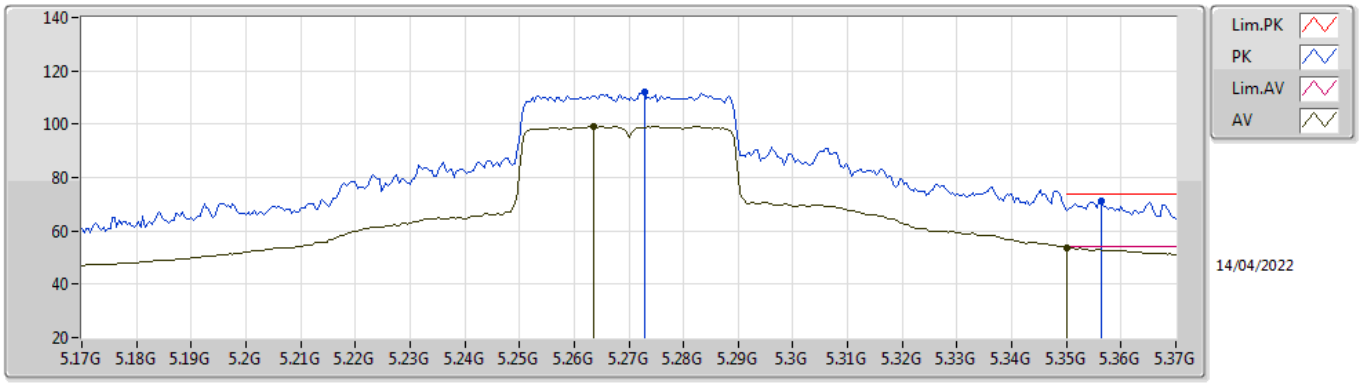


EUT X_1TX
Setting 18.5
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2728G	111.91	Inf	-Inf	105.60	3	Vertical	74	1.73	-	34.45	7.20	35.34
AV	5.2636G	99.04	Inf	-Inf	92.75	3	Vertical	74	1.73	-	34.43	7.20	35.34
PK	5.3564G	71.17	74.00	-2.83	64.80	3	Vertical	74	1.73	-	34.51	7.20	35.34
AV	5.35G	53.64	54.00	-0.36	47.28	3	Vertical	74	1.73	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5270MHz_TnomVnom

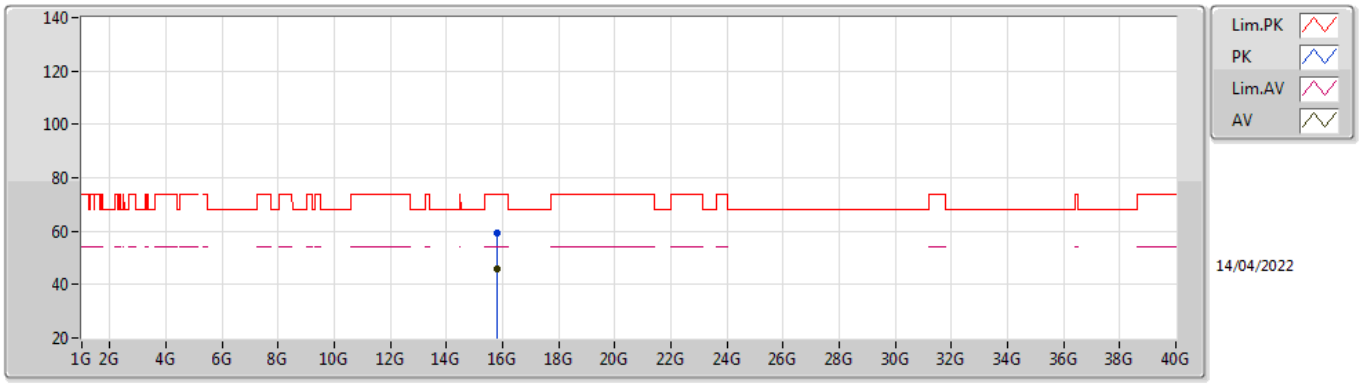


EUT X_1TX
Setting 18.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.81066G	59.20	74.00	-14.80	43.65	3	Vertical	212	2.89	-	37.87	13.31	35.63
AV	15.80142G	45.64	54.00	-8.36	30.06	3	Vertical	212	2.89	-	37.90	13.30	35.62

802.11ax HEW40_Nss1,(MCS0)_1TX

5270MHz_TnomVnom

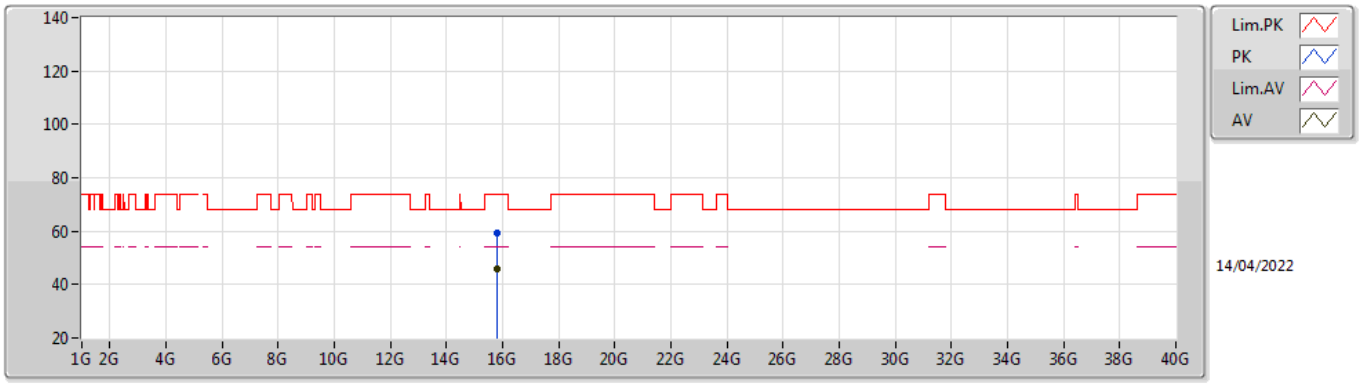


EUT X_1TX
Setting 18.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.8022G	59.31	74.00	-14.69	43.74	3	Horizontal	296	1.35	-	37.89	13.30	35.62
AV	15.80532G	45.66	54.00	-8.34	30.11	3	Horizontal	296	1.35	-	37.88	13.30	35.63

802.11ax HEW40_Nss1,(MCS0)_1TX

5310MHz_TnomVnom

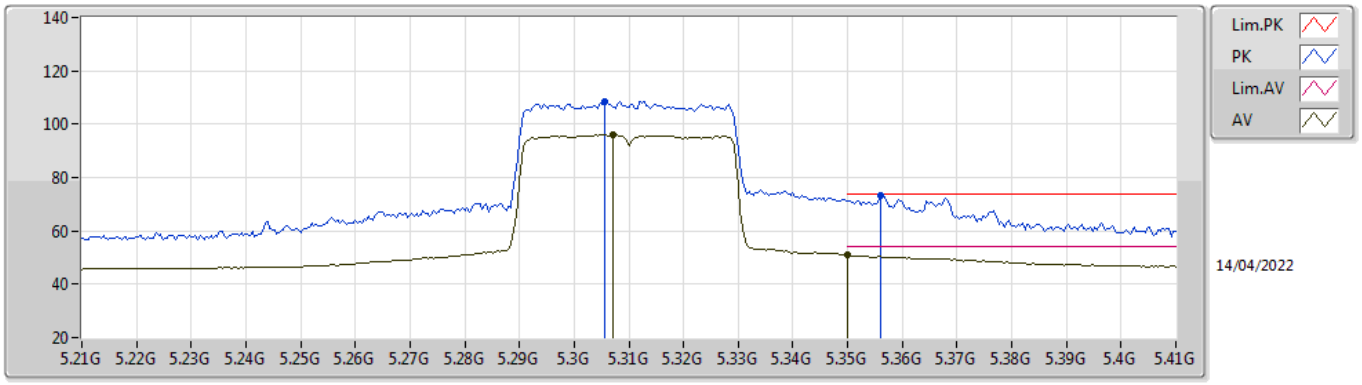


EUT X_1TX
Setting 15.25
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3056G	108.34	Inf	-Inf	101.98	3	Vertical	73	1.72	-	34.50	7.20	35.34
AV	5.3072G	96.09	Inf	-Inf	89.73	3	Vertical	73	1.72	-	34.50	7.20	35.34
PK	5.356G	73.42	74.00	-0.58	67.05	3	Vertical	73	1.72	-	34.51	7.20	35.34
AV	5.35G	50.85	54.00	-3.15	44.49	3	Vertical	73	1.72	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_1TX

5310MHz_TnomVnom

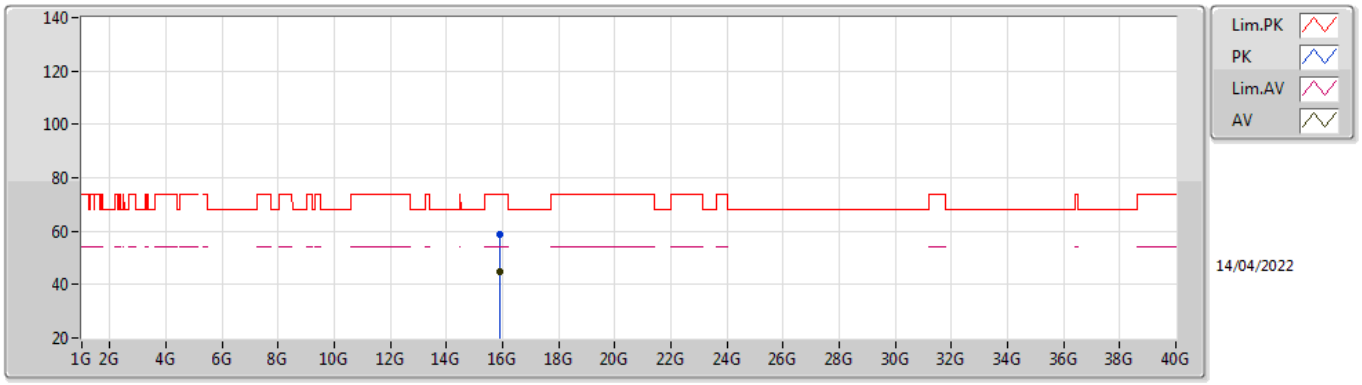


EUT X_1TX
Setting 15.25
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.91728G	59.03	74.00	-14.97	43.82	3	Vertical	67	2.47	-	37.57	13.36	35.72
AV	15.915G	45.02	54.00	-8.98	29.81	3	Vertical	67	2.47	-	37.57	13.36	35.72

802.11ax HEW40_Nss1,(MCS0)_1TX

5310MHz_TnomVnom

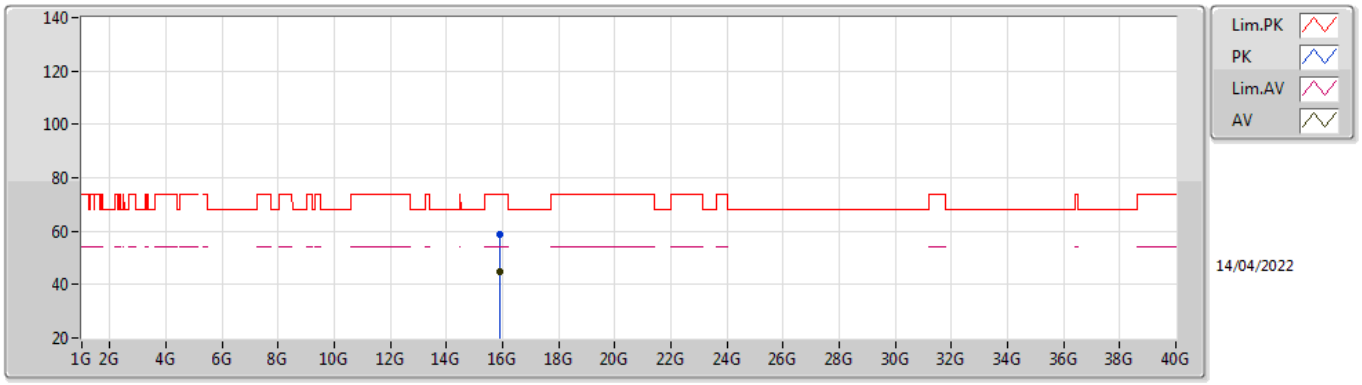


EUT X_1TX
Setting 15.25
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.92256G	58.87	74.00	-15.13	43.68	3	Horizontal	57	1.55	-	37.55	13.36	35.72
AV	15.92076G	44.97	54.00	-9.03	29.77	3	Horizontal	57	1.55	-	37.56	13.36	35.72

802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TnomVnom

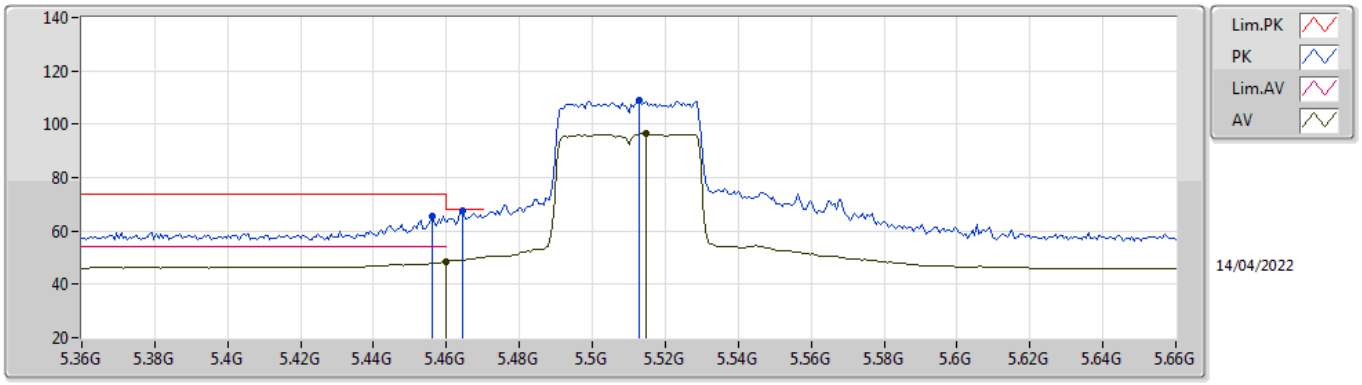


EUT X_1TX
Setting 15.75
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.456G	65.61	74.00	-8.39	59.19	3	Vertical	74	1.68	-	34.51	7.26	35.35
AV	5.46G	48.50	54.00	-5.50	42.07	3	Vertical	74	1.68	-	34.52	7.26	35.35
PK	5.4644G	67.48	68.20	-0.72	61.04	3	Vertical	74	1.68	-	34.53	7.26	35.35
PK	5.513G	109.02	Inf	-Inf	102.47	3	Vertical	74	1.68	-	34.60	7.31	35.36
AV	5.5148G	96.44	Inf	-Inf	89.89	3	Vertical	74	1.68	-	34.60	7.31	35.36

802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TnomVnom

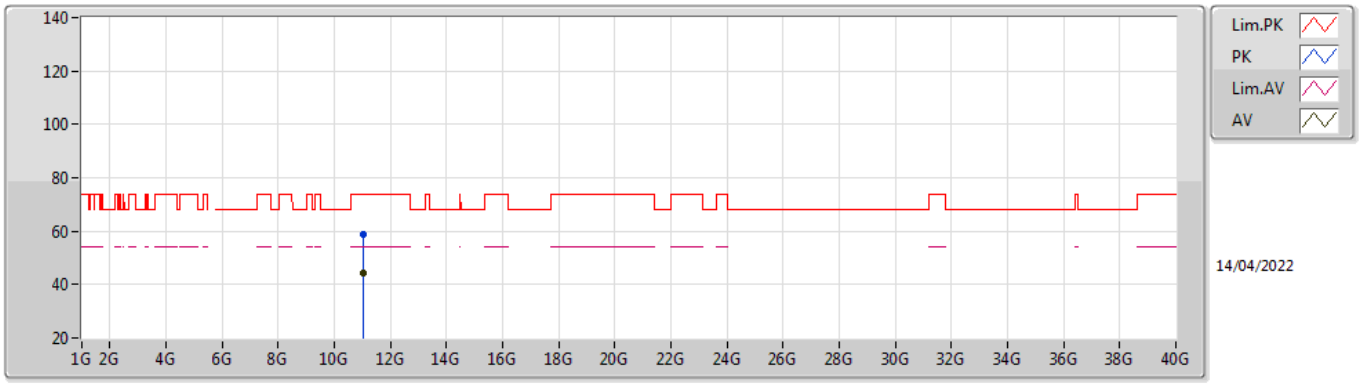


EUT X_1TX
Setting 15.75
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0203G	58.94	74.00	-15.06	44.93	3	Vertical	110	1.58	-	38.42	10.65	35.06
AV	11.01802G	44.17	54.00	-9.83	30.16	3	Vertical	110	1.58	-	38.42	10.65	35.06

802.11ax HEW40_Nss1,(MCS0)_1TX

5510MHz_TnomVnom

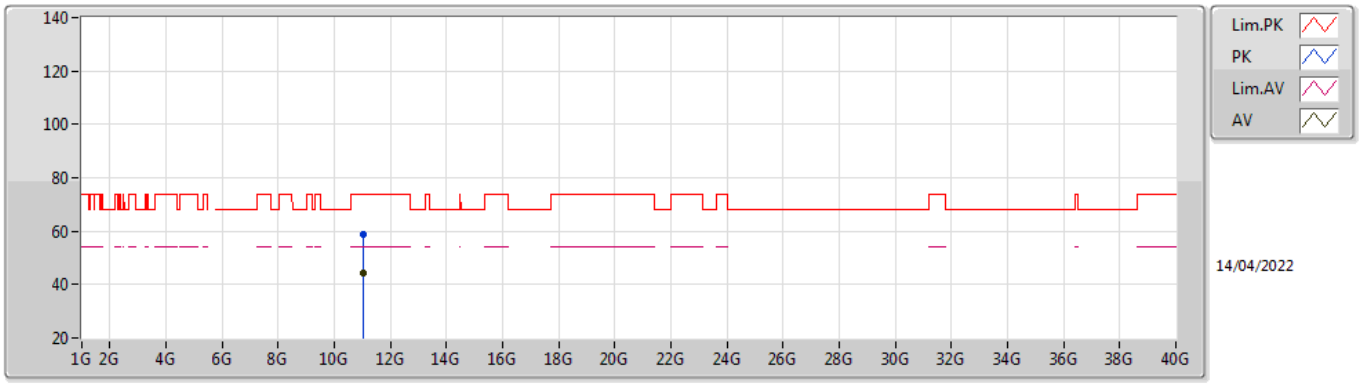


EUT X_1TX
Setting 15.75
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0203G	58.72	74.00	-15.28	44.71	3	Horizontal	149	2.46	-	38.42	10.65	35.06
AV	11.01832G	44.28	54.00	-9.72	30.27	3	Horizontal	149	2.46	-	38.42	10.65	35.06

802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TnomVnom

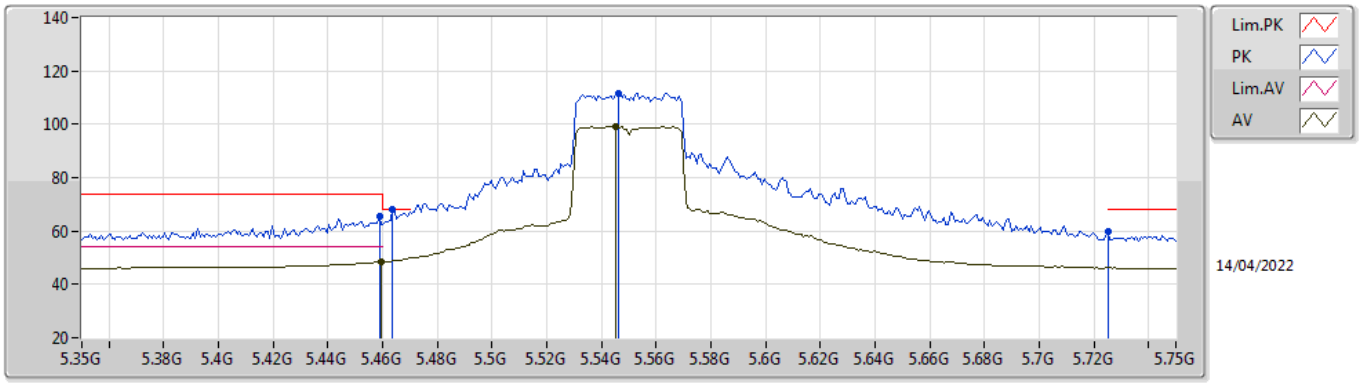


EUT X_1TX
Setting 17.75
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4588G	65.34	74.00	-8.66	58.91	3	Vertical	76	1.66	-	34.52	7.26	35.35
AV	5.4596G	48.31	54.00	-5.69	41.88	3	Vertical	76	1.66	-	34.52	7.26	35.35
PK	5.4636G	67.97	68.20	-0.23	61.53	3	Vertical	76	1.66	-	34.53	7.26	35.35
PK	5.546G	111.54	Inf	-Inf	104.96	3	Vertical	76	1.66	-	34.60	7.35	35.37
AV	5.5452G	99.03	Inf	-Inf	92.45	3	Vertical	76	1.66	-	34.60	7.35	35.37
PK	5.7252G	59.79	68.20	-8.41	53.60	3	Vertical	76	1.66	-	34.25	7.40	35.46

802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TnomVnom

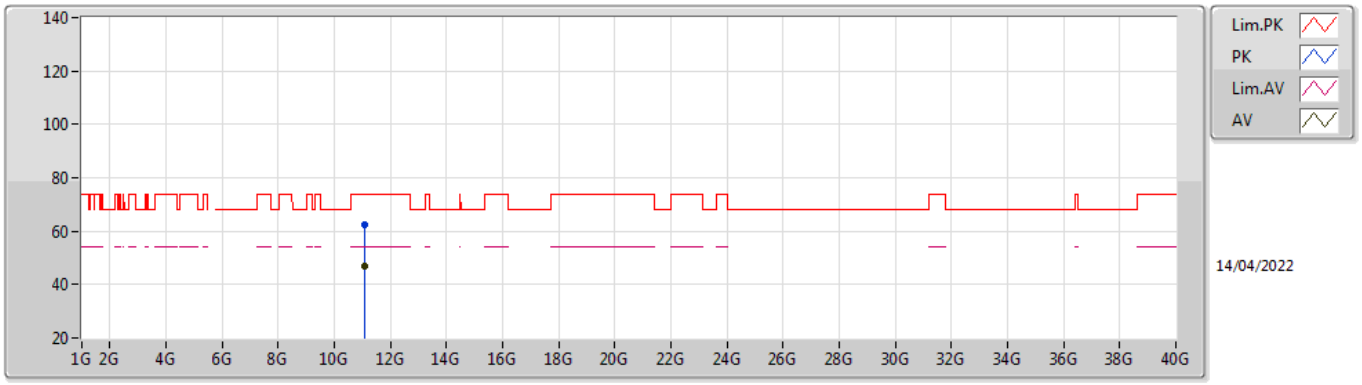


EUT X_1TX
Setting 17.75
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.10036G	62.59	74.00	-11.41	48.57	3	Vertical	51	2.52	-	38.50	10.67	35.15
AV	11.09874G	46.75	54.00	-7.25	32.74	3	Vertical	51	2.52	-	38.50	10.66	35.15

802.11ax HEW40_Nss1,(MCS0)_1TX

5550MHz_TnomVnom

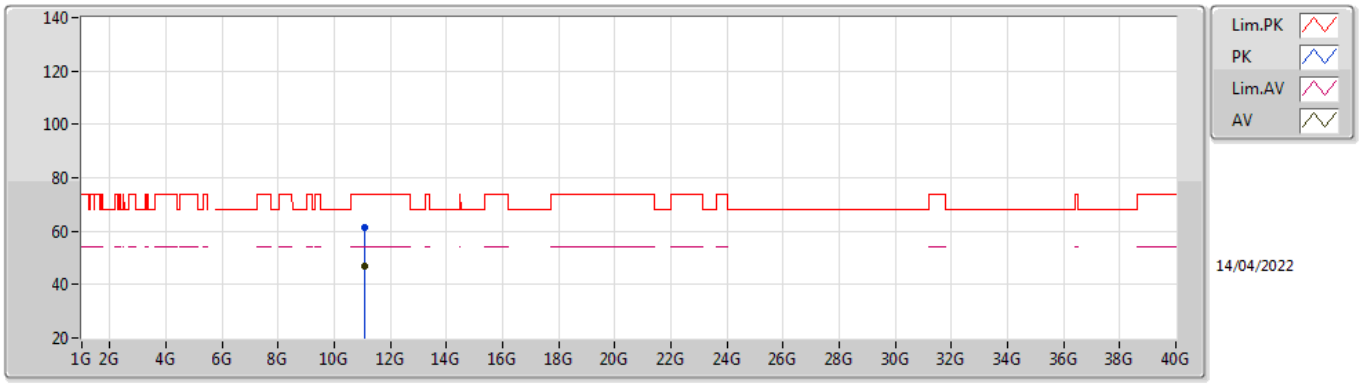


EUT X_1TX
Setting 17.75
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.10054G	61.53	74.00	-12.47	47.51	3	Horizontal	115	2.44	-	38.50	10.67	35.15
AV	11.0988G	46.67	54.00	-7.33	32.66	3	Horizontal	115	2.44	-	38.50	10.66	35.15

802.11ax HEW40_Nss1,(MCS0)_1TX

5670MHz_TnomVnom

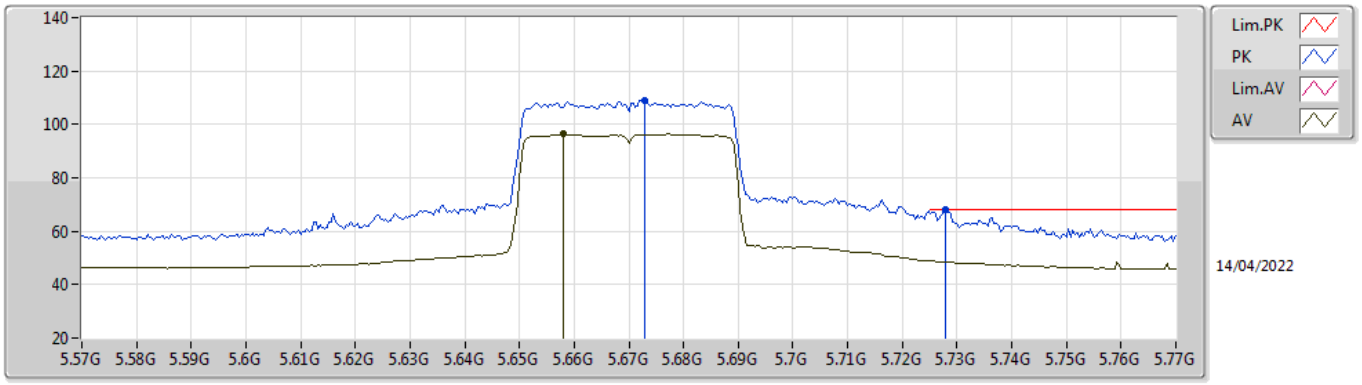


EUT X_1TX
Setting 15
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6728G	109.16	Inf	-Inf	102.79	3	Vertical	76	1.61	-	34.41	7.40	35.44
AV	5.658G	96.35	Inf	-Inf	89.91	3	Vertical	76	1.61	-	34.47	7.40	35.43
PK	5.728G	68.16	68.20	-0.04	61.98	3	Vertical	76	1.61	-	34.24	7.40	35.46

802.11ax HEW40_Nss1,(MCS0)_1TX

5670MHz_TnomVnom

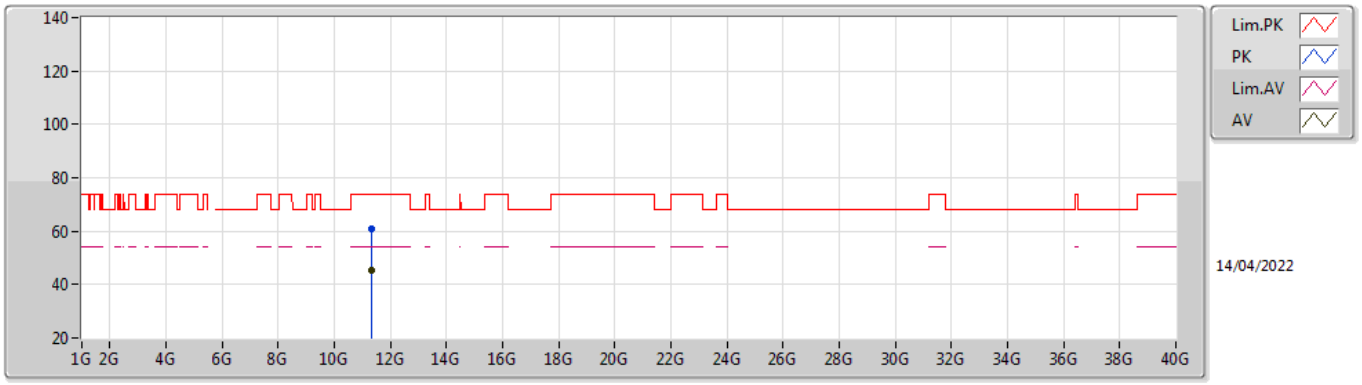


EUT X_1TX
Setting 15
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.34048G	60.79	74.00	-13.21	46.77	3	Vertical	49	1.88	-	38.74	10.70	35.42
AV	11.3388G	45.18	54.00	-8.82	31.16	3	Vertical	49	1.88	-	38.74	10.70	35.42

802.11ax HEW40_Nss1,(MCS0)_1TX

5670MHz_TnomVnom

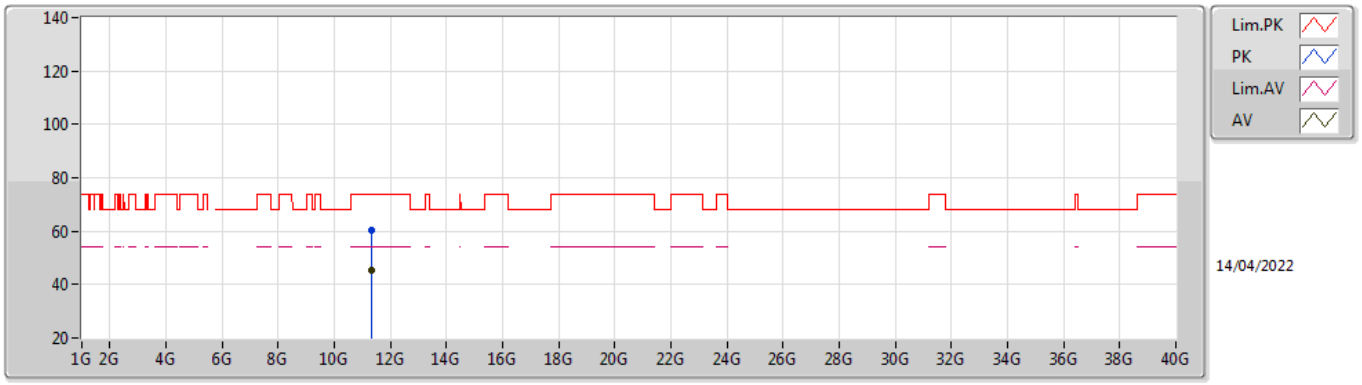


EUT X_1TX
Setting 15
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.34054G	60.39	74.00	-13.61	46.37	3	Horizontal	283	1.67	-	38.74	10.70	35.42
AV	11.33874G	45.14	54.00	-8.86	31.12	3	Horizontal	283	1.67	-	38.74	10.70	35.42

802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

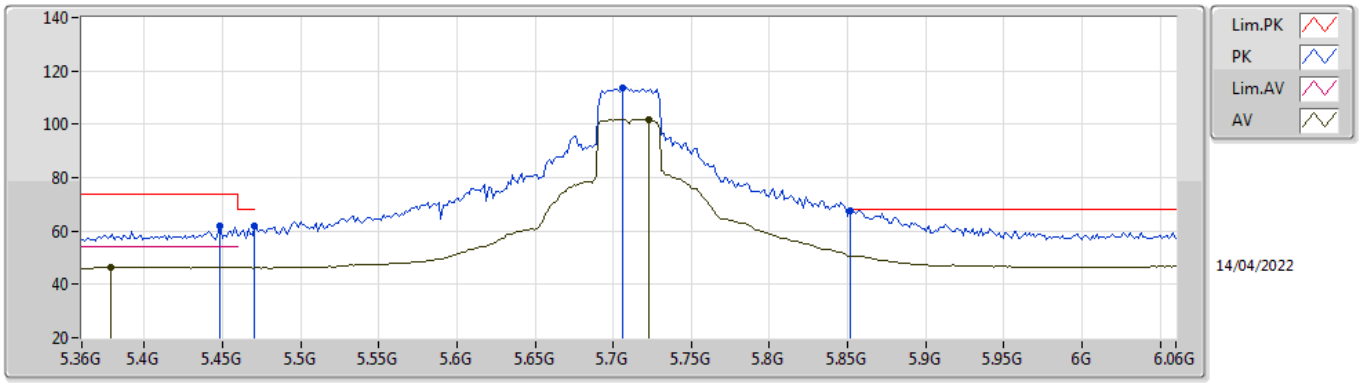


EUT X_1TX
Setting 20
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4482G	61.80	74.00	-12.20	55.40	3	Vertical	76	1.57	-	34.50	7.25	35.35
AV	5.3782G	46.34	54.00	-7.66	39.93	3	Vertical	76	1.57	-	34.56	7.20	35.35
PK	5.47G	61.96	68.20	-6.24	55.50	3	Vertical	76	1.57	-	34.54	7.27	35.35
PK	5.7058G	113.78	Inf	-Inf	107.54	3	Vertical	76	1.57	-	34.29	7.40	35.45
AV	5.7226G	101.69	Inf	-Inf	95.50	3	Vertical	76	1.57	-	34.25	7.40	35.46
PK	5.8514G	67.82	68.20	-0.38	61.59	3	Vertical	76	1.57	-	34.31	7.45	35.53

802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

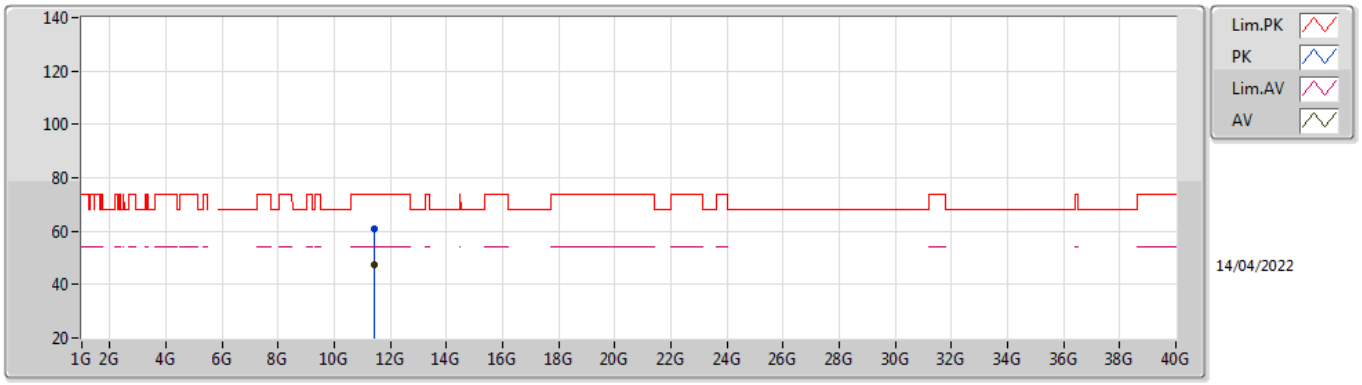


EUT X_1TX
Setting 20
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4158G	60.96	74.00	-13.04	46.93	3	Vertical	179	2.58	-	38.83	10.71	35.51
AV	11.41592G	47.44	54.00	-6.56	33.41	3	Vertical	179	2.58	-	38.83	10.71	35.51

802.11ax HEW40_Nss1,(MCS0)_1TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

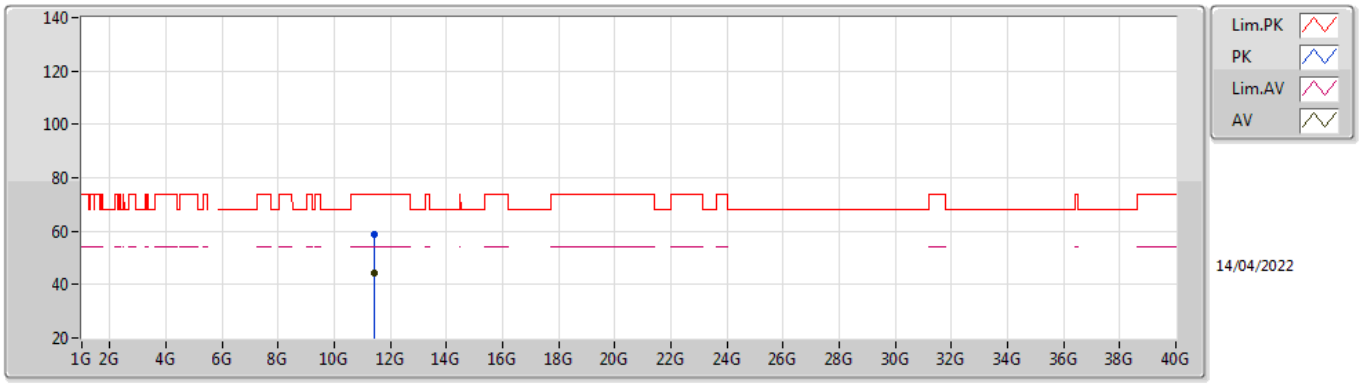


EUT X_1TX
Setting 20
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.42948G	58.60	74.00	-15.40	44.55	3	Horizontal	195	2.10	-	38.86	10.71	35.52
AV	11.41574G	44.18	54.00	-9.82	30.15	3	Horizontal	195	2.10	-	38.83	10.71	35.51

802.11ax HEW40_Nss1,(MCS0)_1TX

5755MHz_TnomVnom

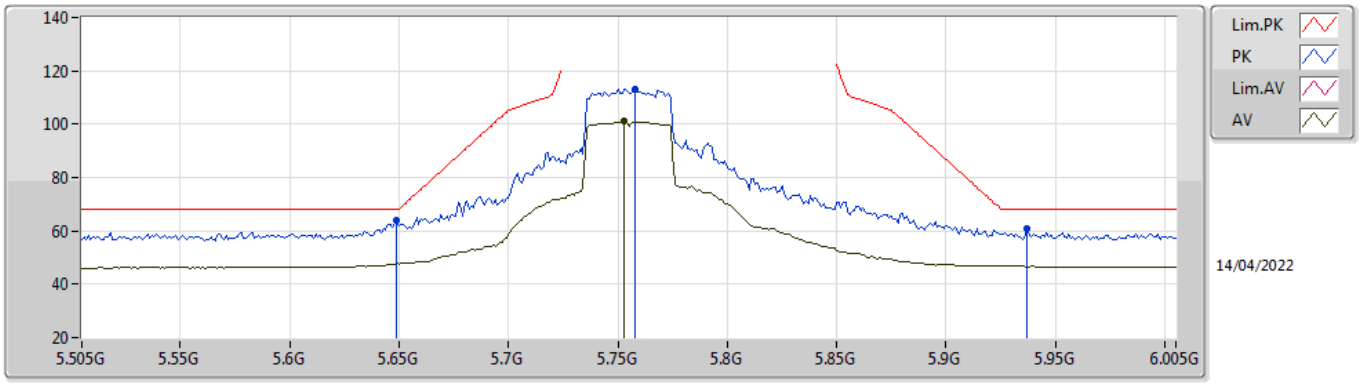


EUT X_1TX
Setting 18.75
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.649G	63.82	68.20	-4.38	57.34	3	Vertical	77	1.60	-	34.50	7.40	35.42
PK	5.758G	113.33	Inf	-Inf	107.21	3	Vertical	77	1.60	-	34.20	7.40	35.48
AV	5.753G	101.12	Inf	-Inf	95.00	3	Vertical	77	1.60	-	34.20	7.40	35.48
PK	5.937G	60.65	68.20	-7.55	53.93	3	Vertical	77	1.60	-	34.75	7.54	35.57

802.11ax HEW40_Nss1,(MCS0)_1TX

5755MHz_TnomVnom

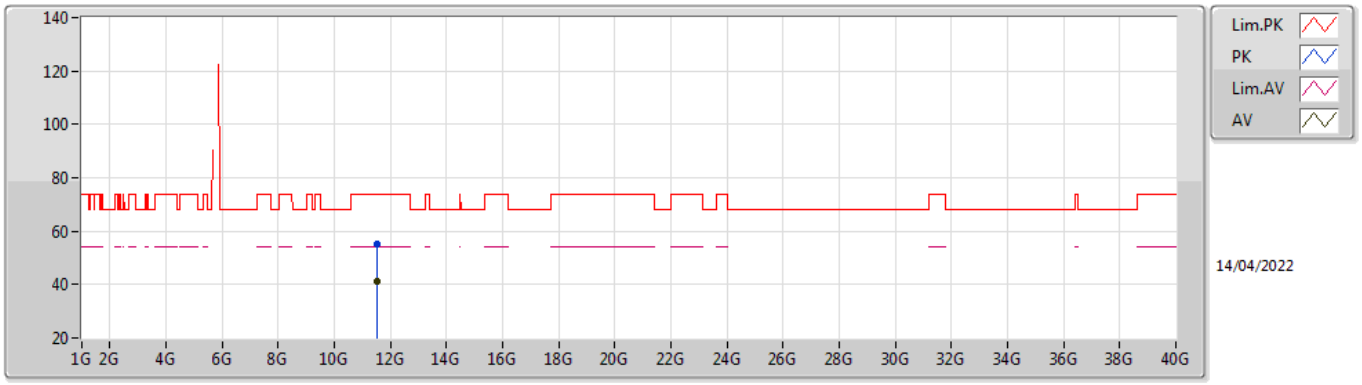


EUT X_1TX
Setting 18.75
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.51024G	55.18	74.00	-18.82	41.01	3	Vertical	77	1.60	-	39.04	10.73	35.60
AV	11.51666G	41.38	54.00	-12.62	27.18	3	Vertical	77	1.60	-	39.07	10.73	35.60

802.11ax HEW40_Nss1,(MCS0)_1TX

5755MHz_TnomVnom

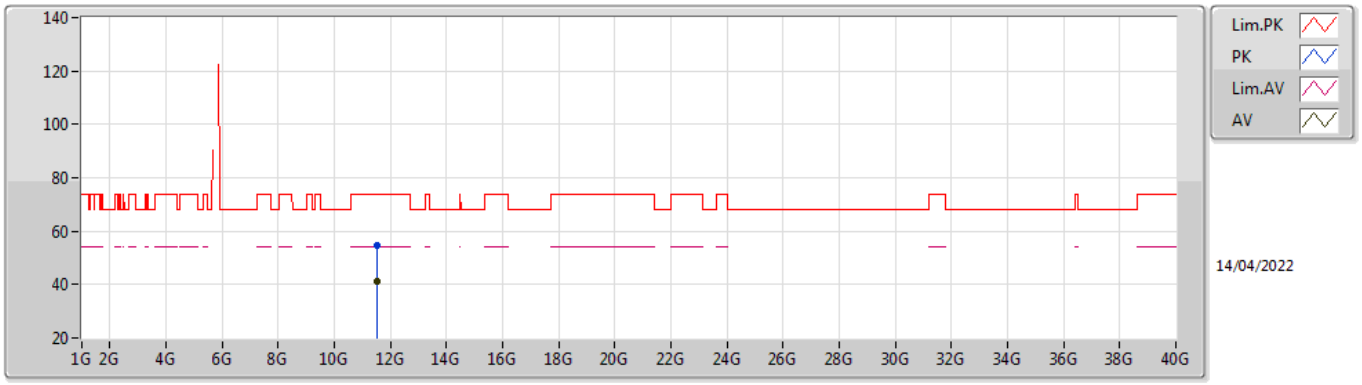


EUT X_1TX
Setting 18.75
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.50706G	54.53	74.00	-19.47	40.37	3	Horizontal	2	1.18	-	39.03	10.73	35.60
AV	11.50382G	41.36	54.00	-12.64	27.21	3	Horizontal	2	1.18	-	39.02	10.73	35.60

802.11ax HEW40_Nss1,(MCS0)_1TX

5795MHz_TnomVnom

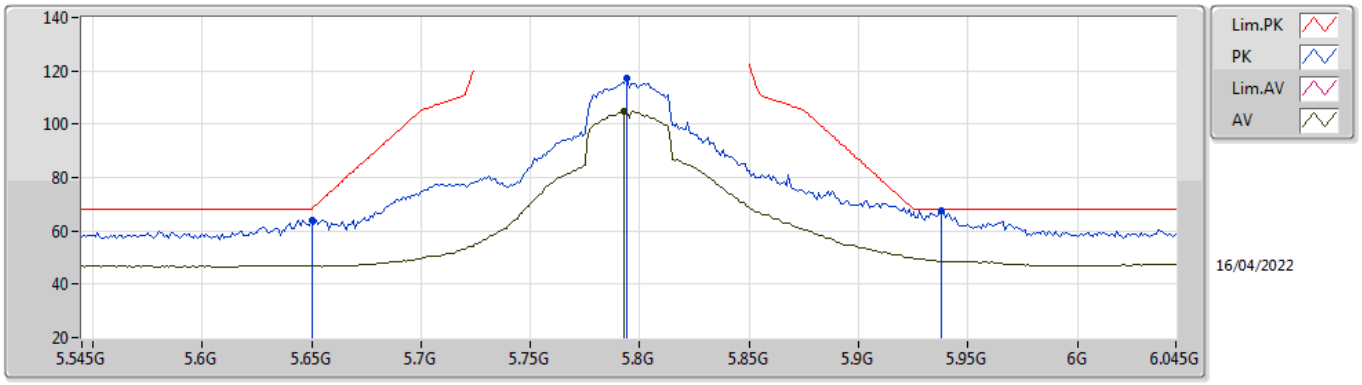


EUT X_1TX
Setting 21
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.65G	64.12	68.20	-4.08	57.65	3	Vertical	88	1.68	-	34.50	7.40	35.43
PK	5.794G	117.04	Inf	-Inf	110.94	3	Vertical	88	1.68	-	34.20	7.40	35.50
AV	5.793G	105.01	Inf	-Inf	98.91	3	Vertical	88	1.68	-	34.20	7.40	35.50
PK	5.938G	67.57	68.20	-0.63	60.85	3	Vertical	88	1.68	-	34.75	7.54	35.57

802.11ax HEW40_Nss1,(MCS0)_1TX

5795MHz_TnomVnom

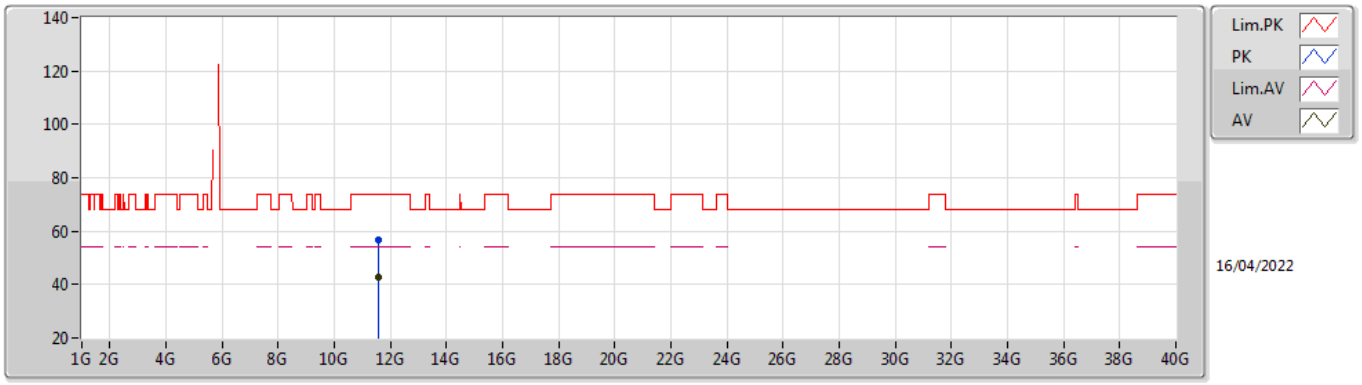


EUT X_1TX
Setting 21
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.57902G	56.72	74.00	-17.28	42.24	3	Vertical	339	1.80	-	39.32	10.74	35.58
AV	11.59132G	42.90	54.00	-11.10	28.37	3	Vertical	339	1.80	-	39.37	10.74	35.58

802.11ax HEW40_Nss1,(MCS0)_1TX

5795MHz_TnomVnom

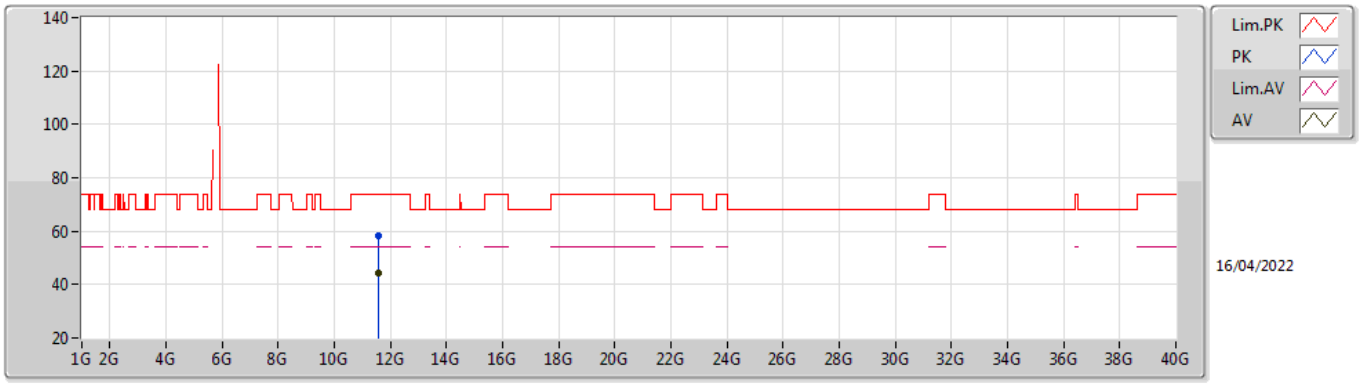


EUT X_1TX
Setting 21
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.59066G	58.25	74.00	-15.75	43.73	3	Horizontal	208	1.94	-	39.36	10.74	35.58
AV	11.59138G	44.51	54.00	-9.49	29.98	3	Horizontal	208	1.94	-	39.37	10.74	35.58

802.11ax HEW80_Nss1,(MCS0)_1TX

5210MHz_TnomVnom

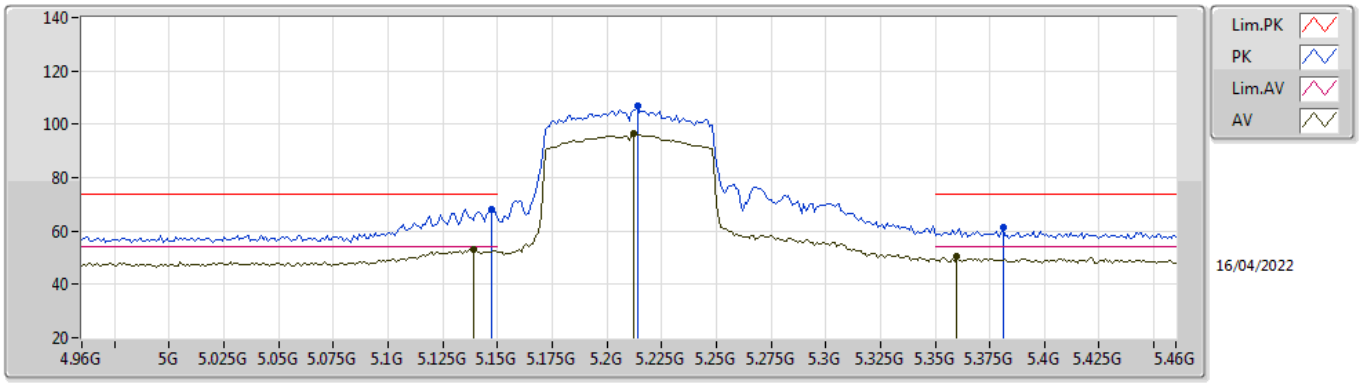


EUT X_1TX
Setting 14.25
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.147G	68.31	74.00	-5.69	62.49	3	Vertical	68	1.80	-	33.99	7.17	35.34
AV	5.139G	53.31	54.00	-0.69	47.50	3	Vertical	68	1.80	-	33.98	7.17	35.34
PK	5.214G	107.04	Inf	-Inf	100.92	3	Vertical	68	1.80	-	34.26	7.20	35.34
AV	5.212G	96.43	Inf	-Inf	90.32	3	Vertical	68	1.80	-	34.25	7.20	35.34
PK	5.381G	61.13	74.00	-12.87	54.72	3	Vertical	68	1.80	-	34.56	7.20	35.35
AV	5.36G	50.47	54.00	-3.53	44.09	3	Vertical	68	1.80	-	34.52	7.20	35.34

802.11ax HEW80_Nss1,(MCS0)_1TX

5210MHz_TnomVnom

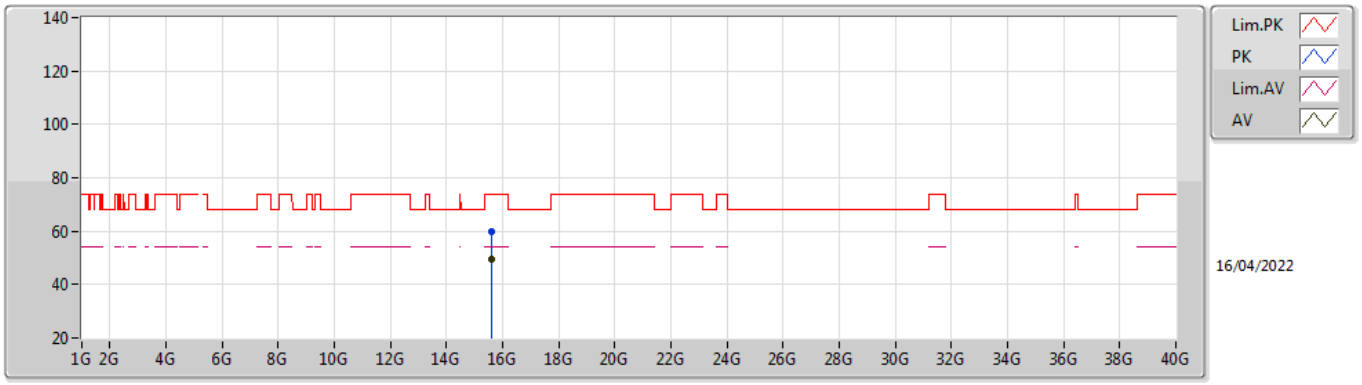


EUT X_1TX
Setting 14.25
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.62934G	60.06	74.00	-13.94	44.48	3	Vertical	0	1.92	-	37.85	13.21	35.48
AV	15.62052G	49.46	54.00	-4.54	33.82	3	Vertical	0	1.92	-	37.90	13.21	35.47

802.11ax HEW80_Nss1,(MCS0)_1TX

5210MHz_TnomVnom

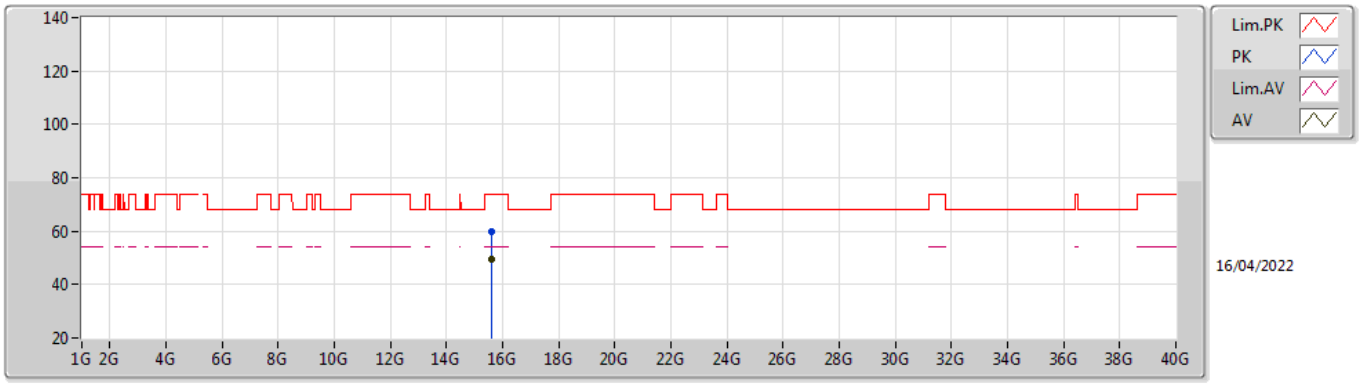


EUT X_1TX
Setting 14.25
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6168G	59.80	74.00	-14.20	44.14	3	Horizontal	130	2.63	-	37.92	13.21	35.47
AV	15.61614G	49.31	54.00	-4.69	33.65	3	Horizontal	130	2.63	-	37.92	13.21	35.47

802.11ax HEW80_Nss1,(MCS0)_1TX

5290MHz_TnomVnom

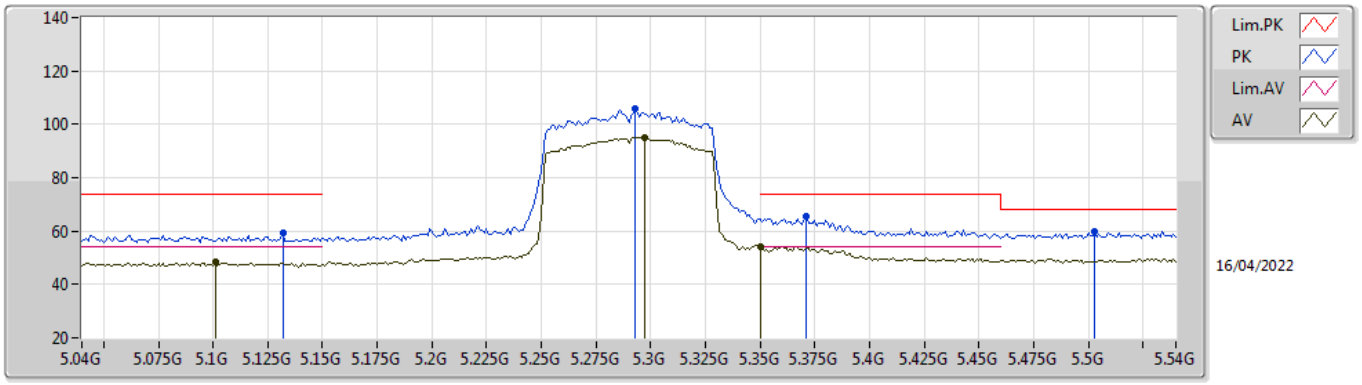


EUT X_1TX
Setting 12.75
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.132G	59.22	74.00	-14.78	53.43	3	Vertical	69	1.80	-	33.96	7.17	35.34
AV	5.101G	48.62	54.00	-5.38	42.90	3	Vertical	69	1.80	-	33.90	7.15	35.33
PK	5.293G	105.61	Inf	-Inf	99.26	3	Vertical	69	1.80	-	34.49	7.20	35.34
AV	5.297G	95.22	Inf	-Inf	88.87	3	Vertical	69	1.80	-	34.49	7.20	35.34
PK	5.371G	65.45	74.00	-8.55	59.05	3	Vertical	69	1.80	-	34.54	7.20	35.34
AV	5.35G	53.98	54.00	-0.02	47.62	3	Vertical	69	1.80	-	34.50	7.20	35.34
PK	5.503G	59.60	68.20	-8.60	53.05	3	Vertical	69	1.80	-	34.60	7.30	35.35

802.11ax HEW80_Nss1,(MCS0)_1TX

5290MHz_TnomVnom

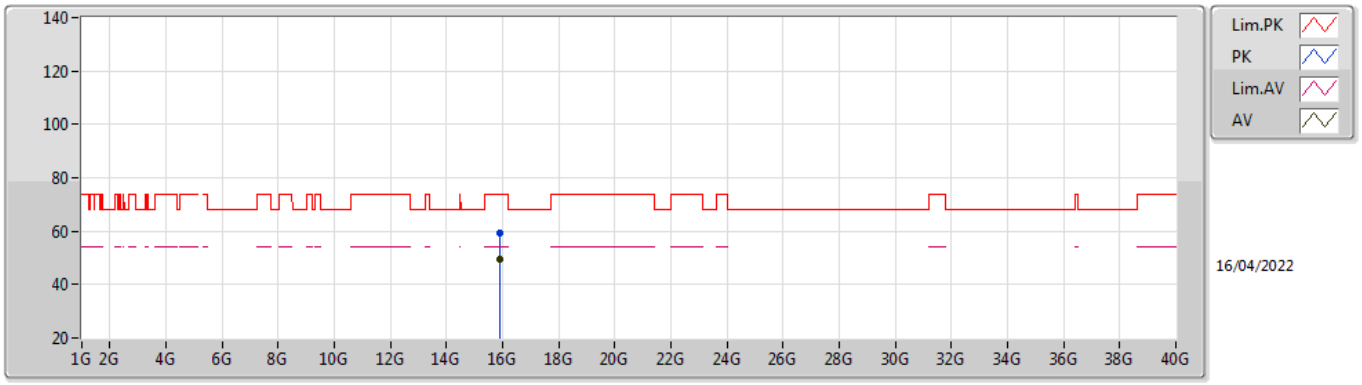


EUT X_1TX
Setting 12.75
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.8832G	59.12	74.00	-14.88	43.82	3	Vertical	119	1.07	-	37.65	13.34	35.69
AV	15.8772G	49.38	54.00	-4.62	34.06	3	Vertical	119	1.07	-	37.67	13.34	35.69

802.11ax HEW80_Nss1,(MCS0)_1TX

5290MHz_TnomVnom

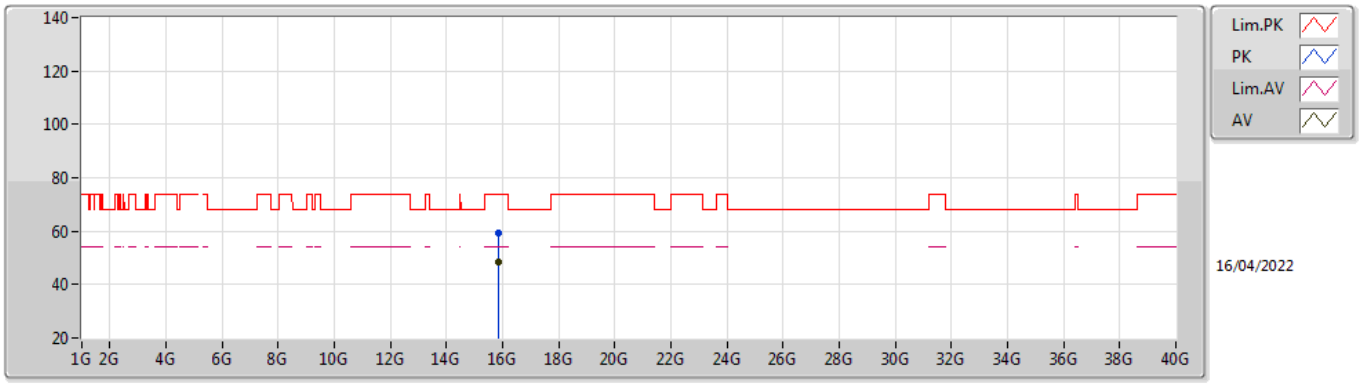


EUT X_1TX
Setting 12.75
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.86508G	59.29	74.00	-14.71	43.94	3	Horizontal	82	2.65	-	37.70	13.33	35.68
AV	15.86154G	48.65	54.00	-5.35	33.27	3	Horizontal	82	2.65	-	37.72	13.33	35.67

802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TnomVnom

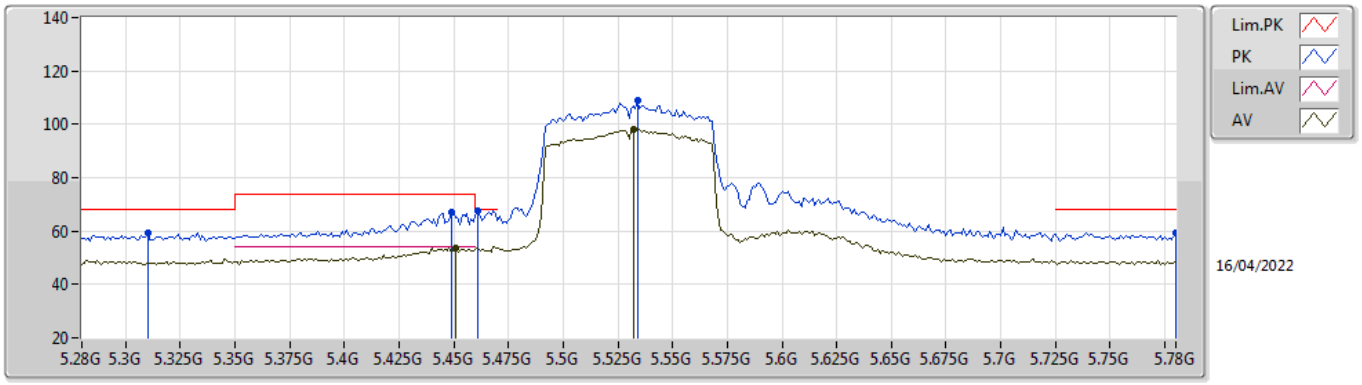


EUT X_1TX
Setting 14.75
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.31G	59.38	68.20	-8.82	53.02	3	Vertical	69	1.64	-	34.50	7.20	35.34
PK	5.449G	67.15	74.00	-6.85	60.75	3	Vertical	69	1.64	-	34.50	7.25	35.35
AV	5.451G	53.63	54.00	-0.37	47.23	3	Vertical	69	1.64	-	34.50	7.25	35.35
PK	5.461G	67.80	68.20	-0.40	61.37	3	Vertical	69	1.64	-	34.52	7.26	35.35
PK	5.534G	109.04	Inf	-Inf	102.48	3	Vertical	69	1.64	-	34.60	7.33	35.37
AV	5.532G	98.25	Inf	-Inf	91.69	3	Vertical	69	1.64	-	34.60	7.33	35.37
PK	5.78G	59.27	68.20	-8.93	53.16	3	Vertical	69	1.64	-	34.20	7.40	35.49

802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TnomVnom

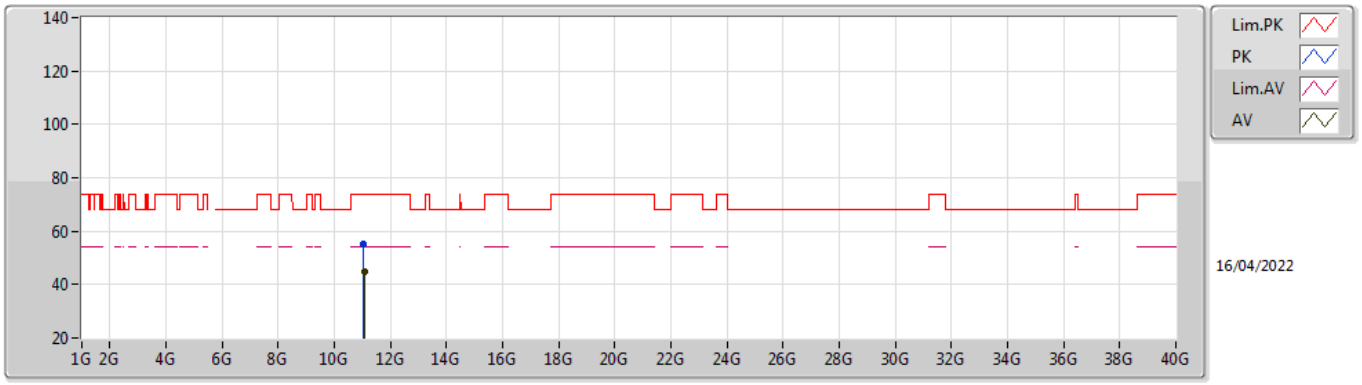


EUT X_1TX
Setting 14.75
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0486G	55.18	74.00	-18.82	41.16	3	Vertical	13	1.11	-	38.45	10.66	35.09
AV	11.0639G	44.88	54.00	-9.12	30.87	3	Vertical	13	1.11	-	38.46	10.66	35.11

802.11ax HEW80_Nss1,(MCS0)_1TX

5530MHz_TnomVnom

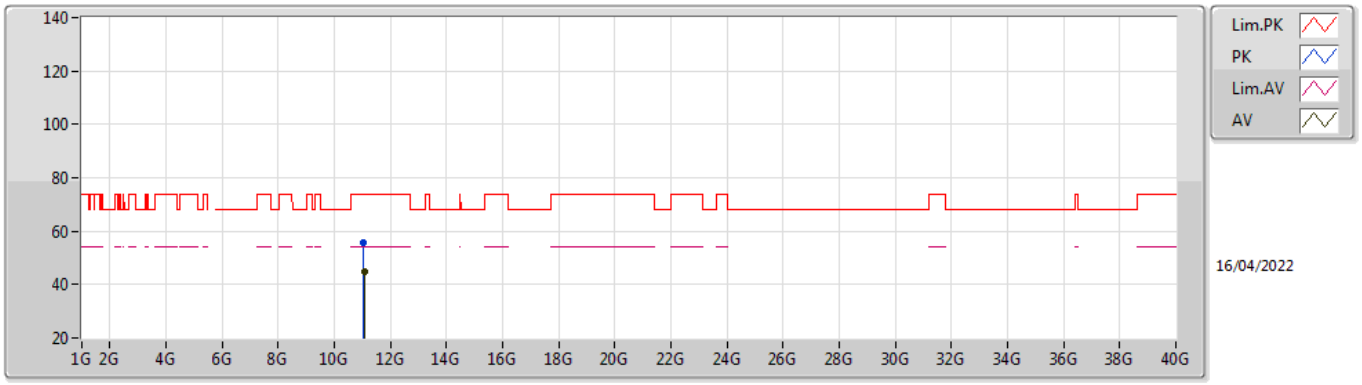


EUT X_1TX
Setting 14.75
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.05634G	55.49	74.00	-18.51	41.47	3	Horizontal	107	1.85	-	38.46	10.66	35.10
AV	11.06294G	44.72	54.00	-9.28	30.71	3	Horizontal	107	1.85	-	38.46	10.66	35.11

802.11ax HEW80_Nss1,(MCS0)_1TX

5610MHz_TnomVnom

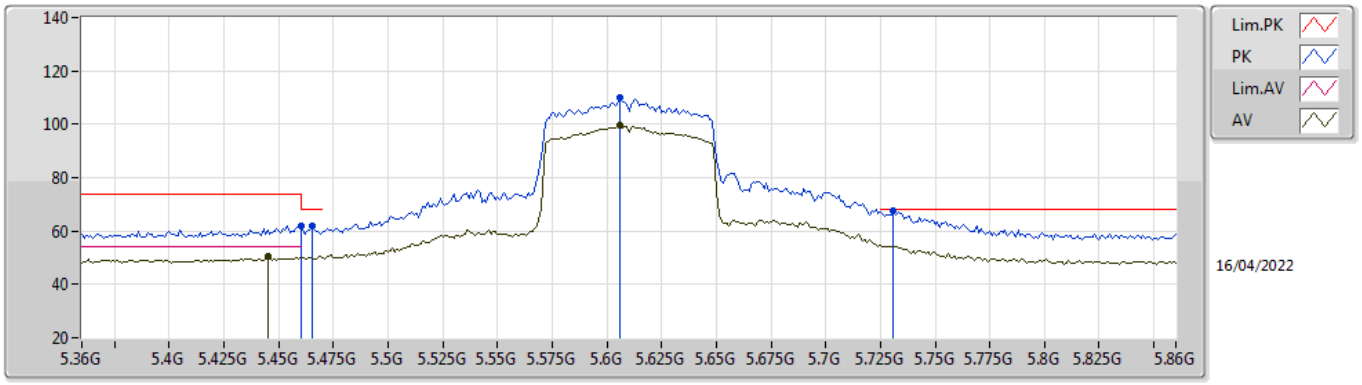


EUT X_1TX
Setting 15.5
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.46G	61.93	74.00	-12.07	55.50	3	Vertical	68	1.63	-	34.52	7.26	35.35
AV	5.445G	50.36	54.00	-3.64	43.95	3	Vertical	68	1.63	-	34.51	7.25	35.35
PK	5.465G	61.86	68.20	-6.34	55.42	3	Vertical	68	1.63	-	34.53	7.26	35.35
PK	5.606G	109.87	Inf	-Inf	103.28	3	Vertical	68	1.63	-	34.59	7.40	35.40
AV	5.606G	99.40	Inf	-Inf	92.81	3	Vertical	68	1.63	-	34.59	7.40	35.40
PK	5.731G	67.37	68.20	-0.83	61.20	3	Vertical	68	1.63	-	34.24	7.40	35.47

802.11ax HEW80_Nss1,(MCS0)_1TX

5610MHz_TnomVnom

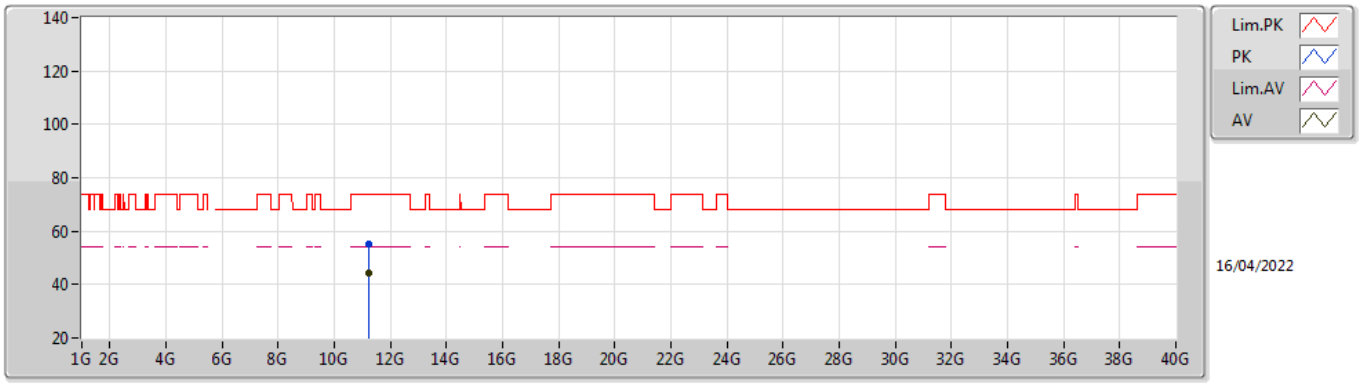


EUT X_1TX
Setting 15.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.22498G	55.41	74.00	-18.59	41.40	3	Vertical	178	1.66	-	38.62	10.68	35.29
AV	11.22642G	44.24	54.00	-9.76	30.22	3	Vertical	178	1.66	-	38.63	10.68	35.29

802.11ax HEW80_Nss1,(MCS0)_1TX

5610MHz_TnomVnom

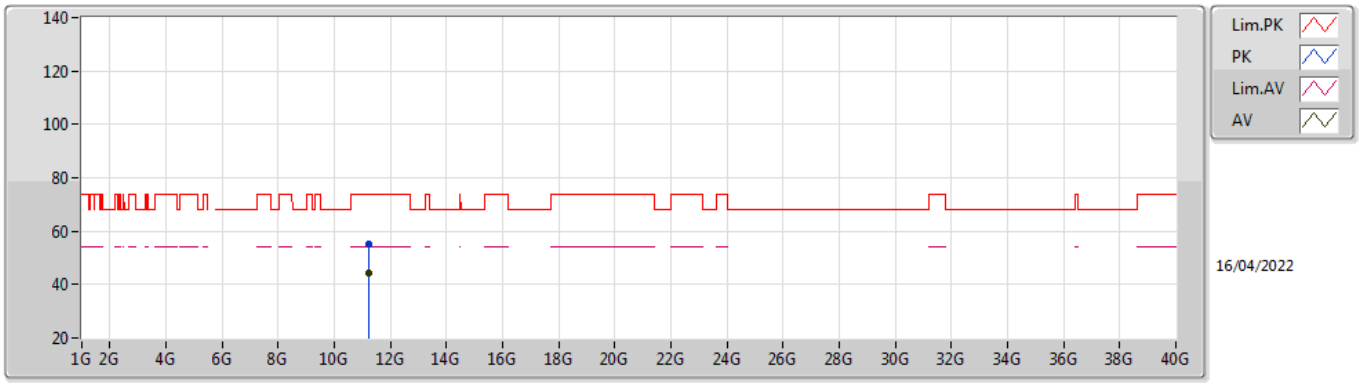


EUT X_1TX
Setting 15.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.21742G	55.11	74.00	-18.89	41.09	3	Horizontal	230	1.07	-	38.62	10.68	35.28
AV	11.22696G	44.47	54.00	-9.53	30.45	3	Horizontal	230	1.07	-	38.63	10.68	35.29

802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

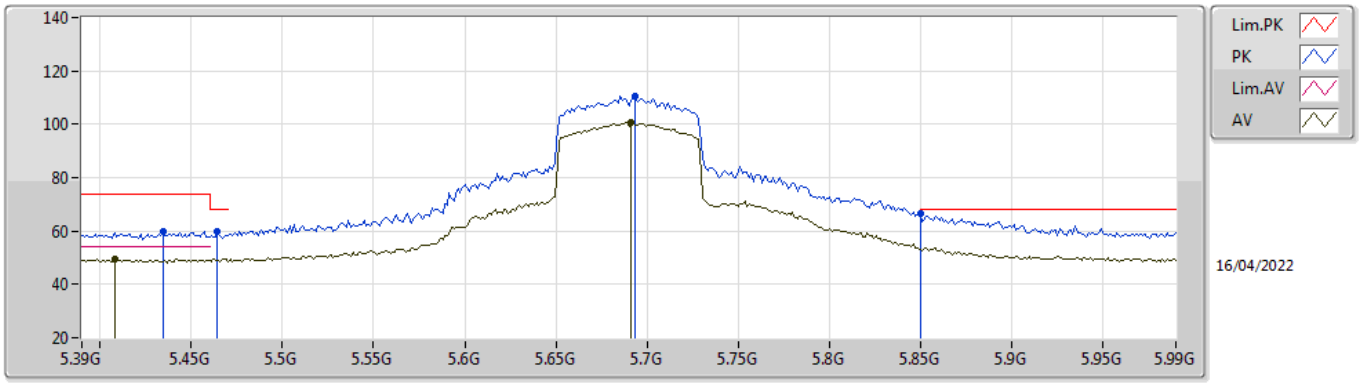


EUT X_1TX
Setting 17.75
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4344G	59.94	74.00	-14.06	53.53	3	Vertical	68	1.64	-	34.53	7.23	35.35
AV	5.408G	49.54	54.00	-4.46	43.10	3	Vertical	68	1.64	-	34.58	7.21	35.35
PK	5.4644G	59.65	68.20	-8.55	53.21	3	Vertical	68	1.64	-	34.53	7.26	35.35
PK	5.6936G	110.77	Inf	-Inf	104.49	3	Vertical	68	1.64	-	34.33	7.40	35.45
AV	5.6912G	100.80	Inf	-Inf	94.51	3	Vertical	68	1.64	-	34.34	7.40	35.45
PK	5.85G	66.41	68.20	-1.79	60.19	3	Vertical	68	1.64	-	34.30	7.45	35.53

802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

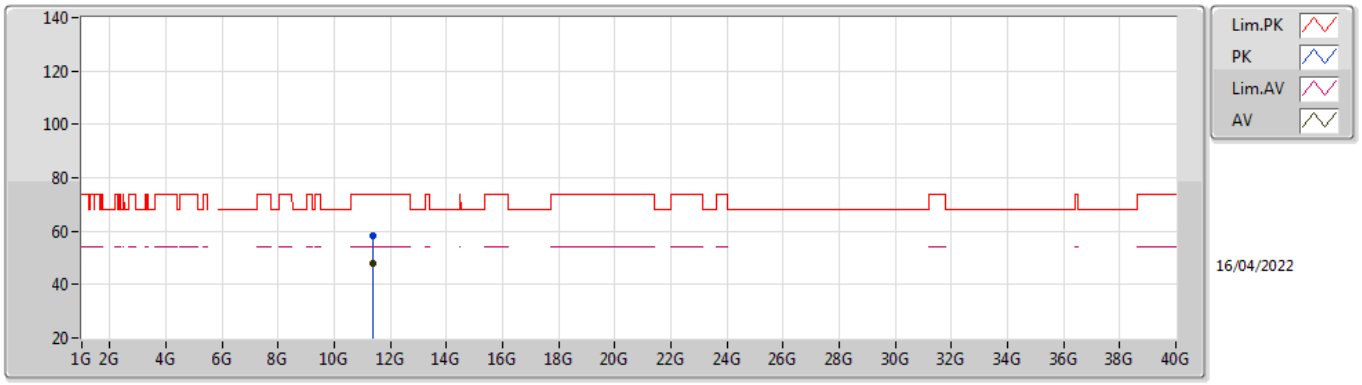


EUT X_1TX
Setting 17.75
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.37076G	58.30	74.00	-15.70	44.28	3	Vertical	170	2.62	-	38.77	10.71	35.46
AV	11.38876G	48.09	54.00	-5.91	34.07	3	Vertical	170	2.62	-	38.79	10.71	35.48

802.11ax HEW80_Nss1,(MCS0)_1TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

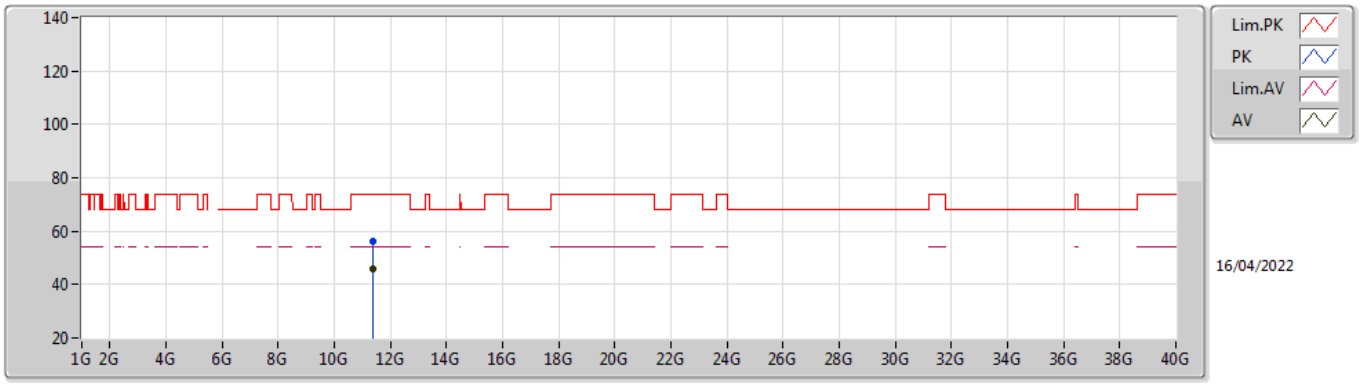


EUT X_1TX
Setting 17.75
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.37658G	56.28	74.00	-17.72	42.25	3	Horizontal	154	2.04	-	38.78	10.71	35.46
AV	11.3935G	46.06	54.00	-7.94	32.04	3	Horizontal	154	2.04	-	38.79	10.71	35.48

802.11ax HEW80_Nss1,(MCS0)_1TX

5775MHz_TnomVnom

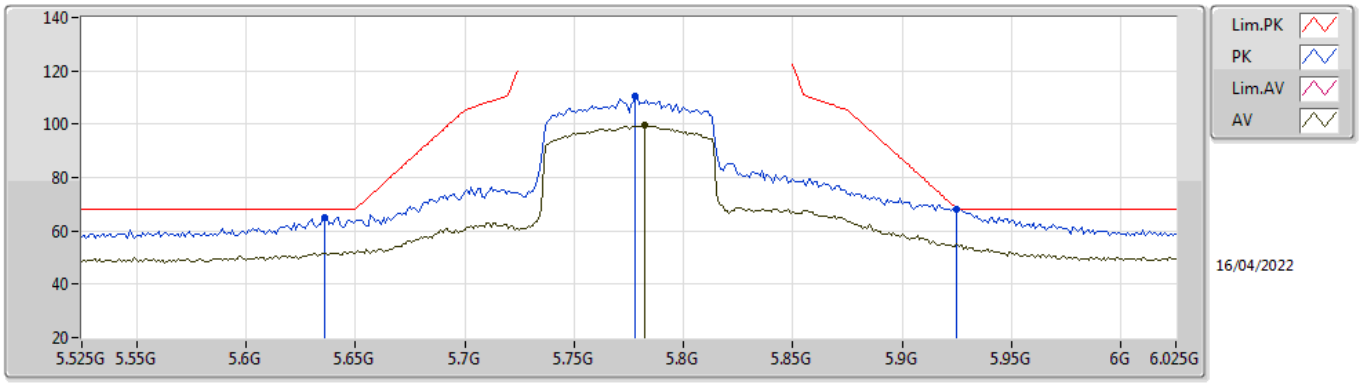


EUT X_1TX
Setting 16.25
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.636G	65.04	68.20	-3.16	58.53	3	Vertical	68	1.53	-	34.53	7.40	35.42
PK	5.778G	110.28	Inf	-Inf	104.17	3	Vertical	68	1.53	-	34.20	7.40	35.49
AV	5.782G	99.43	Inf	-Inf	93.32	3	Vertical	68	1.53	-	34.20	7.40	35.49
PK	5.925G	67.94	68.20	-0.26	61.27	3	Vertical	68	1.53	-	34.70	7.53	35.56

802.11ax HEW80_Nss1,(MCS0)_1TX

5775MHz_TnomVnom

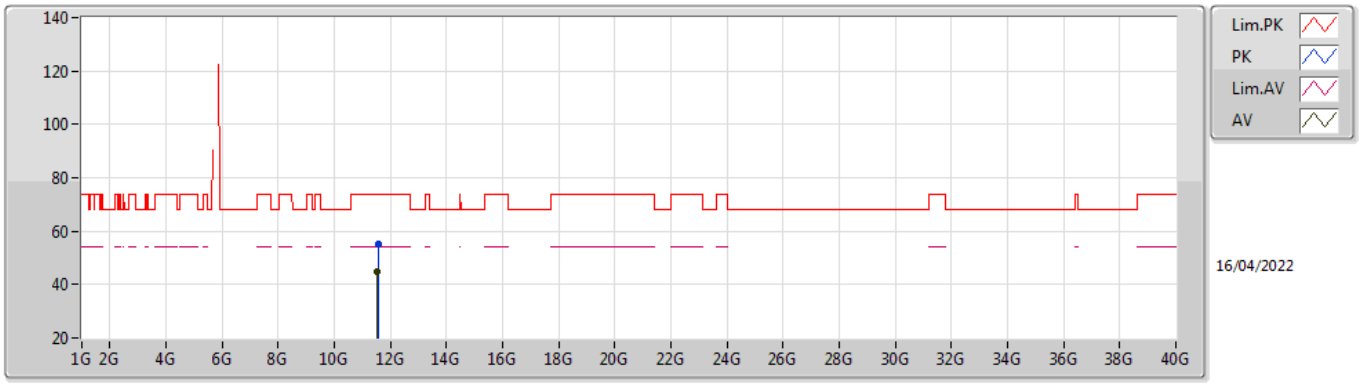


EUT X_1TX
Setting 16.25
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.56122G	55.31	74.00	-18.69	40.93	3	Vertical	128	1.01	-	39.24	10.73	35.59
AV	11.53974G	44.97	54.00	-9.03	30.67	3	Vertical	128	1.01	-	39.16	10.73	35.59

802.11ax HEW80_Nss1,(MCS0)_1TX

5775MHz_TnomVnom

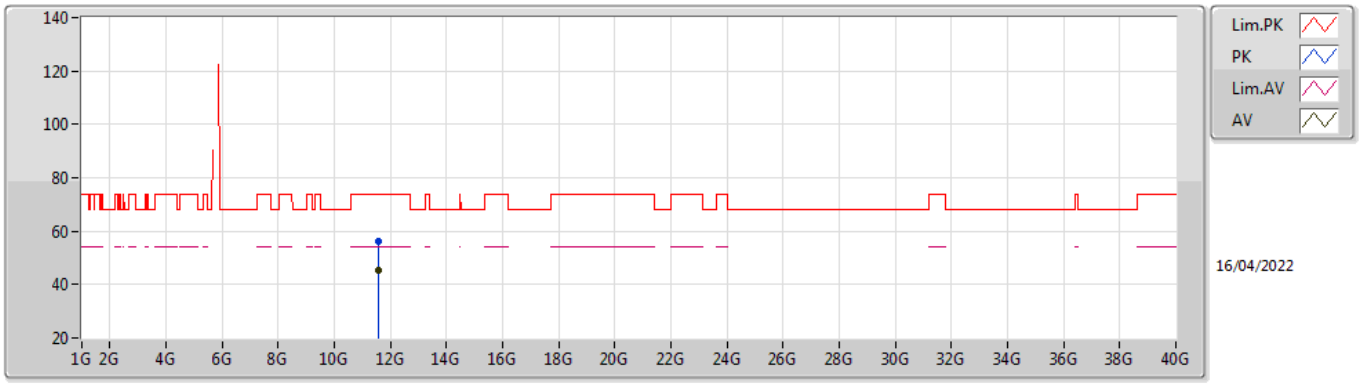


EUT X_1TX
Setting 16.25
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.55888G	56.01	74.00	-17.99	41.63	3	Horizontal	282	2.70	-	39.24	10.73	35.59
AV	11.56374G	45.10	54.00	-8.90	30.71	3	Horizontal	282	2.70	-	39.25	10.73	35.59

802.11ax HEW160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

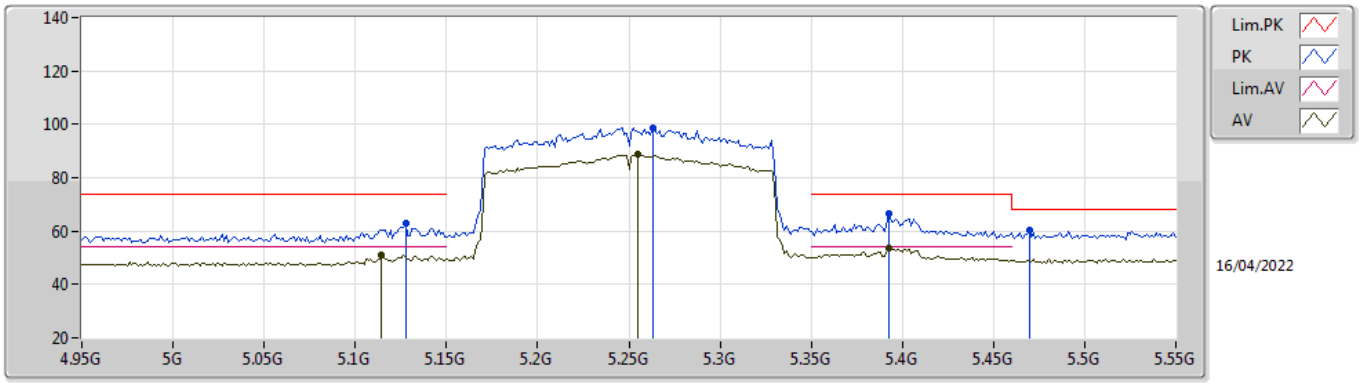


EUT X_1TX
Setting 9
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1276G	62.90	74.00	-11.10	57.12	3	Vertical	69	1.80	-	33.96	7.16	35.34
AV	5.1144G	50.90	54.00	-3.10	45.14	3	Vertical	69	1.80	-	33.93	7.16	35.33
PK	5.2632G	98.79	Inf	-Inf	92.50	3	Vertical	69	1.80	-	34.43	7.20	35.34
AV	5.2548G	88.92	Inf	-Inf	82.65	3	Vertical	69	1.80	-	34.41	7.20	35.34
PK	5.3928G	66.31	74.00	-7.69	59.87	3	Vertical	69	1.80	-	34.59	7.20	35.35
AV	5.3928G	53.76	54.00	-0.24	47.32	3	Vertical	69	1.80	-	34.59	7.20	35.35
PK	5.4696G	60.11	68.20	-8.09	53.65	3	Vertical	69	1.80	-	34.54	7.27	35.35

802.11ax HEW160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

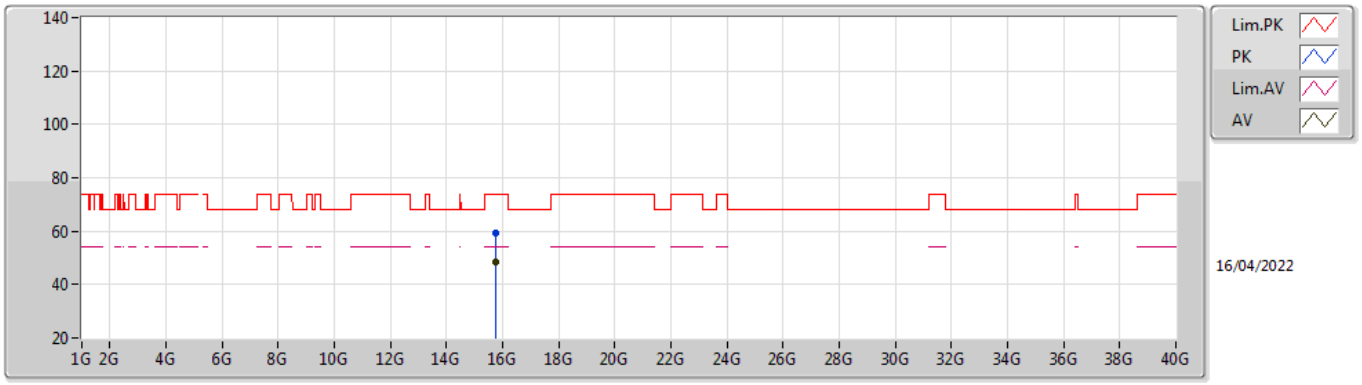


EUT X_1TX
Setting 9
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.74034G	59.23	74.00	-14.77	43.87	3	Vertical	335	2.19	-	37.66	13.27	35.57
AV	15.74226G	48.69	54.00	-5.31	33.32	3	Vertical	335	2.19	-	37.67	13.27	35.57

802.11ax HEW160_Nss1,(MCS0)_1TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

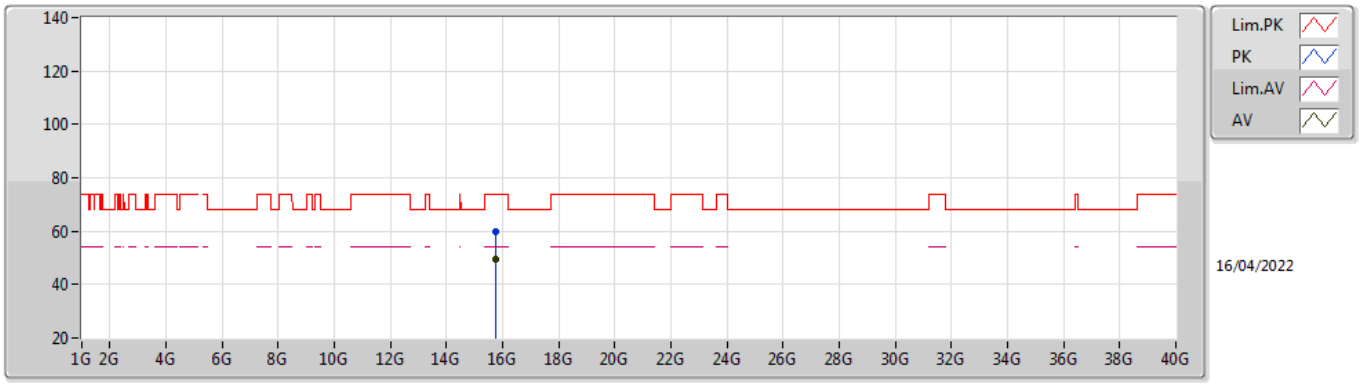


EUT X_1TX
Setting 9
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.76164G	59.92	74.00	-14.08	44.48	3	Horizontal	206	2.79	-	37.75	13.28	35.59
AV	15.74016G	49.39	54.00	-4.61	34.03	3	Horizontal	206	2.79	-	37.66	13.27	35.57

802.11ax HEW160_Nss1,(MCS0)_1TX

5570MHz_TnomVnom

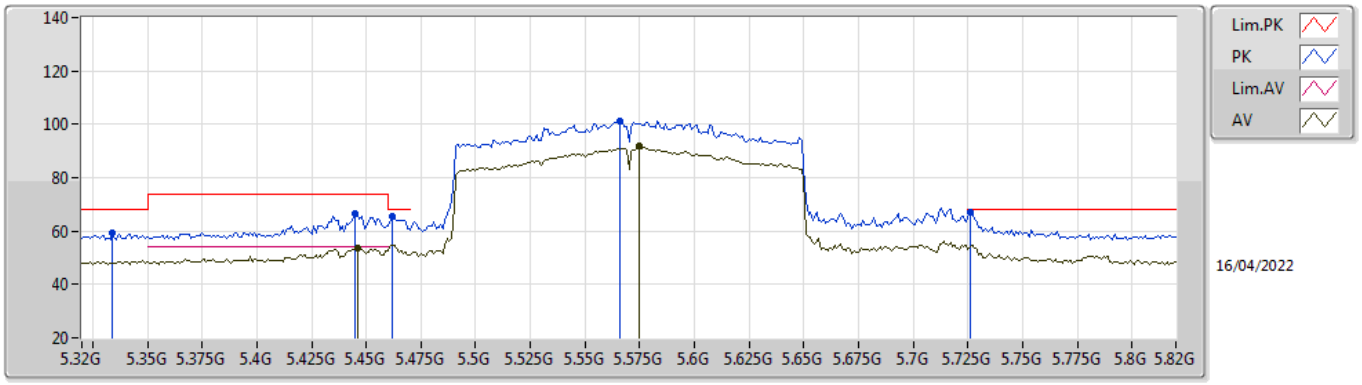


EUT X_1TX
Setting 10.25
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.334G	59.43	68.20	-8.77	53.07	3	Vertical	70	1.72	-	34.50	7.20	35.34
PK	5.445G	66.63	74.00	-7.37	60.22	3	Vertical	70	1.72	-	34.51	7.25	35.35
AV	5.446G	53.58	54.00	-0.42	47.17	3	Vertical	70	1.72	-	34.51	7.25	35.35
PK	5.462G	65.70	68.20	-2.50	59.27	3	Vertical	70	1.72	-	34.52	7.26	35.35
PK	5.566G	101.36	Inf	-Inf	94.77	3	Vertical	70	1.72	-	34.60	7.37	35.38
AV	5.575G	91.65	Inf	-Inf	85.07	3	Vertical	70	1.72	-	34.60	7.37	35.39
PK	5.726G	66.89	68.20	-1.31	60.70	3	Vertical	70	1.72	-	34.25	7.40	35.46

802.11ax HEW160_Nss1,(MCS0)_1TX

5570MHz_TnomVnom

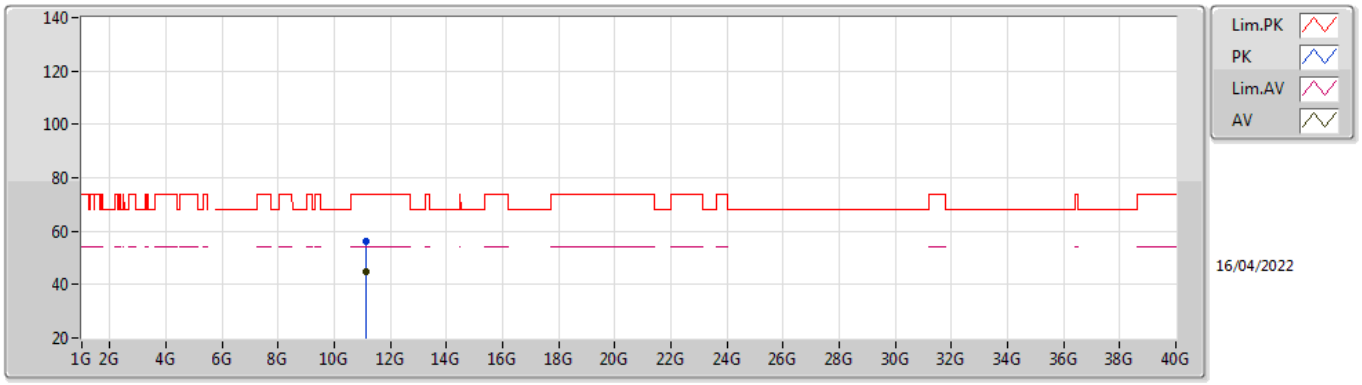


EUT X_1TX
Setting 10.25
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.13766G	56.11	74.00	-17.89	42.09	3	Vertical	199	2.76	-	38.54	10.67	35.19
AV	11.14312G	44.79	54.00	-9.21	30.78	3	Vertical	199	2.76	-	38.54	10.67	35.20

802.11ax HEW160_Nss1,(MCS0)_1TX

5570MHz_TnomVnom

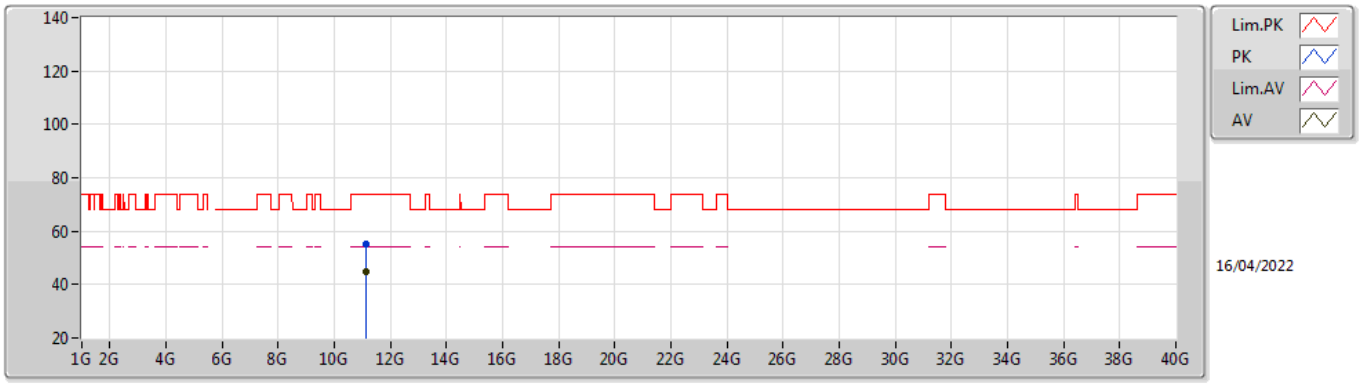

EUT X_1TX
Setting 10.25
03-C-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.12572G	55.39	74.00	-18.61	41.37	3	Horizontal	125	1.80	-	38.53	10.67	35.18
AV	11.14258G	44.68	54.00	-9.32	30.67	3	Horizontal	125	1.80	-	38.54	10.67	35.20

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW80_Nss1,(MCS0)_2TX	Pass	PK	5.924G	68.83	68.94	-0.11	3	Vertical	325	1.97	-

802.11a_Nss1,(6Mbps)_2TX

5180MHz_TnomVnom

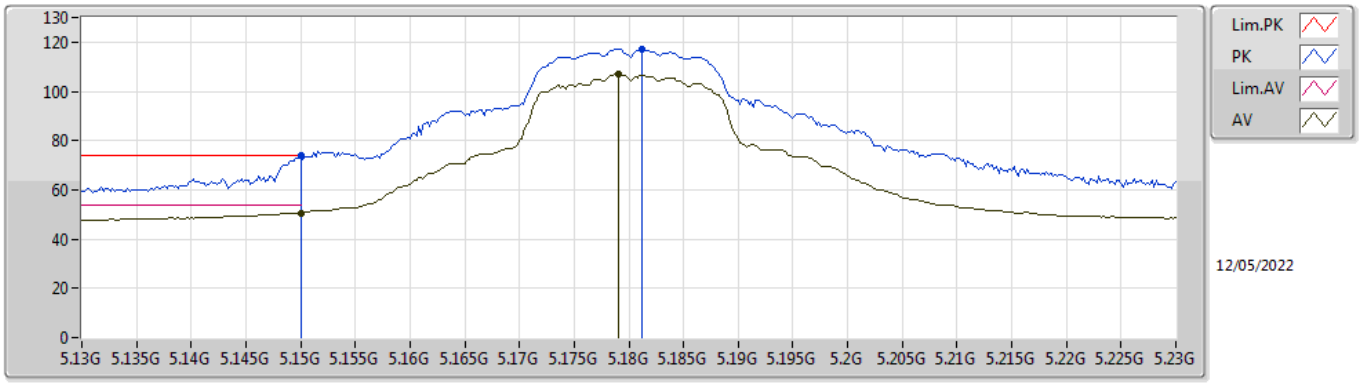


EUT X_2TX
Setting 18.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	73.79	74.00	-0.21	67.96	3	Vertical	61	1.80	-	34.00	7.17	35.34
AV	5.15G	50.67	54.00	-3.33	44.84	3	Vertical	61	1.80	-	34.00	7.17	35.34
PK	5.1812G	117.13	Inf	-Inf	111.16	3	Vertical	61	1.80	-	34.12	7.19	35.34
AV	5.179G	106.88	Inf	-Inf	100.91	3	Vertical	61	1.80	-	34.12	7.19	35.34

802.11a_Nss1,(6Mbps)_2TX

5180MHz_TnomVnom

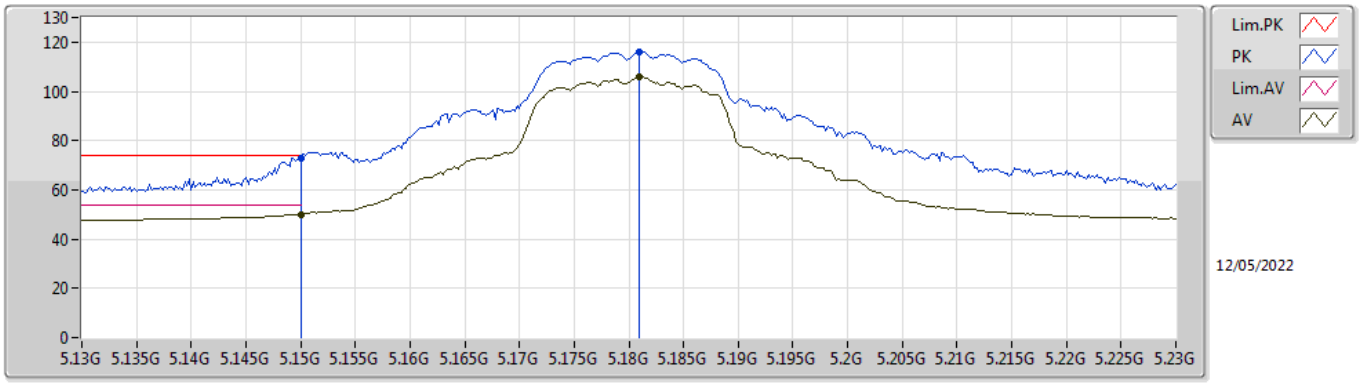


EUT X_2TX
Setting 18.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	72.96	74.00	-1.04	67.13	3	Horizontal	202	1.01	-	34.00	7.17	35.34
AV	5.15G	49.95	54.00	-4.05	44.12	3	Horizontal	202	1.01	-	34.00	7.17	35.34
PK	5.181G	115.99	Inf	-Inf	110.02	3	Horizontal	202	1.01	-	34.12	7.19	35.34
AV	5.181G	105.68	Inf	-Inf	99.71	3	Horizontal	202	1.01	-	34.12	7.19	35.34

802.11a_Nss1,(6Mbps)_2TX

5180MHz_TnomVnom

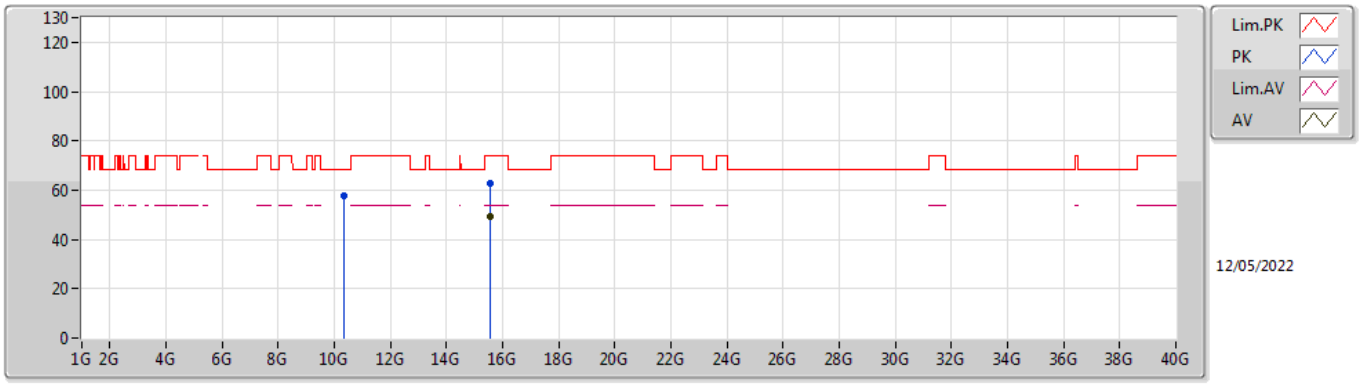


EUT X_2TX
Setting 18.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.363G	57.89	68.20	-10.31	44.76	3	Vertical	225	1.80	-	38.16	10.55	35.58
PK	15.53977G	62.72	74.00	-11.28	46.53	3	Vertical	127	1.74	-	38.42	13.17	35.40
AV	15.53899G	49.29	54.00	-4.71	33.09	3	Vertical	127	1.74	-	38.43	13.17	35.40

802.11a_Nss1,(6Mbps)_2TX

5180MHz_TnomVnom

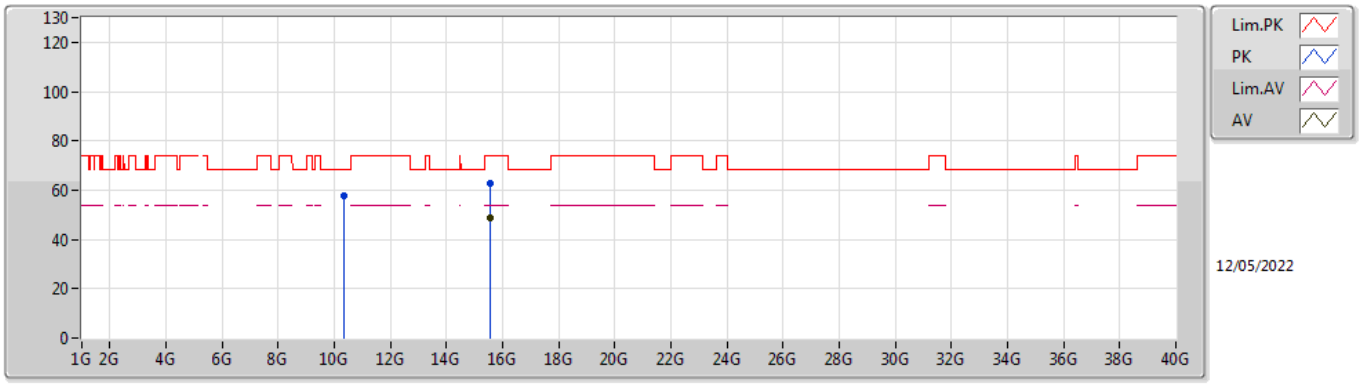


EUT X_2TX
Setting 18.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.35682G	57.66	68.20	-10.54	44.53	3	Horizontal	220	1.78	-	38.16	10.55	35.58
PK	15.5414G	62.77	74.00	-11.23	46.59	3	Horizontal	313	2.69	-	38.41	13.17	35.40
AV	15.53931G	48.86	54.00	-5.14	32.67	3	Horizontal	313	2.69	-	38.42	13.17	35.40

802.11a_Nss1,(6Mbps)_2TX

5200MHz_TnomVnom

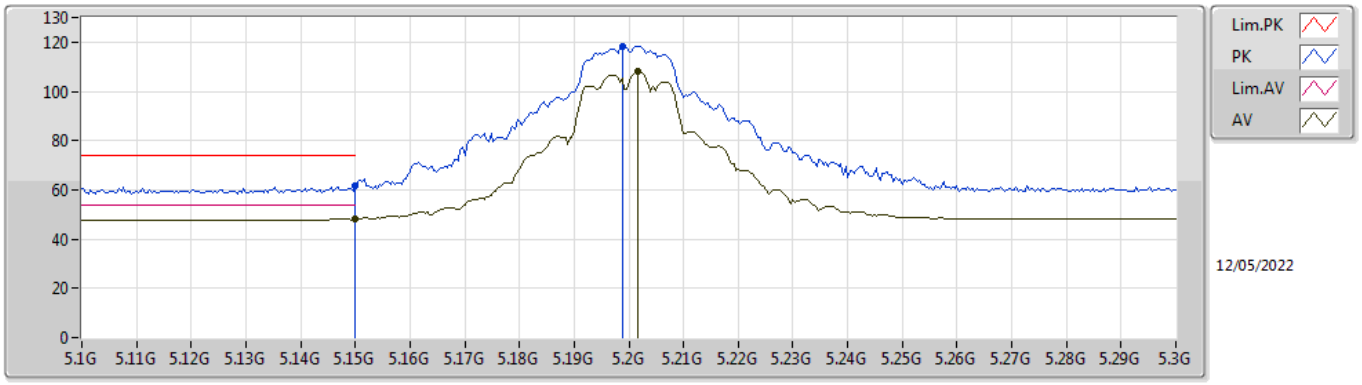


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	61.56	74.00	-12.44	55.73	3	Vertical	58	1.80	-	34.00	7.17	35.34
AV	5.15G	48.09	54.00	-5.91	42.26	3	Vertical	58	1.80	-	34.00	7.17	35.34
PK	5.1988G	118.19	Inf	-Inf	112.13	3	Vertical	58	1.80	-	34.20	7.20	35.34
AV	5.2016G	107.98	Inf	-Inf	101.91	3	Vertical	58	1.80	-	34.21	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5200MHz_TnomVnom

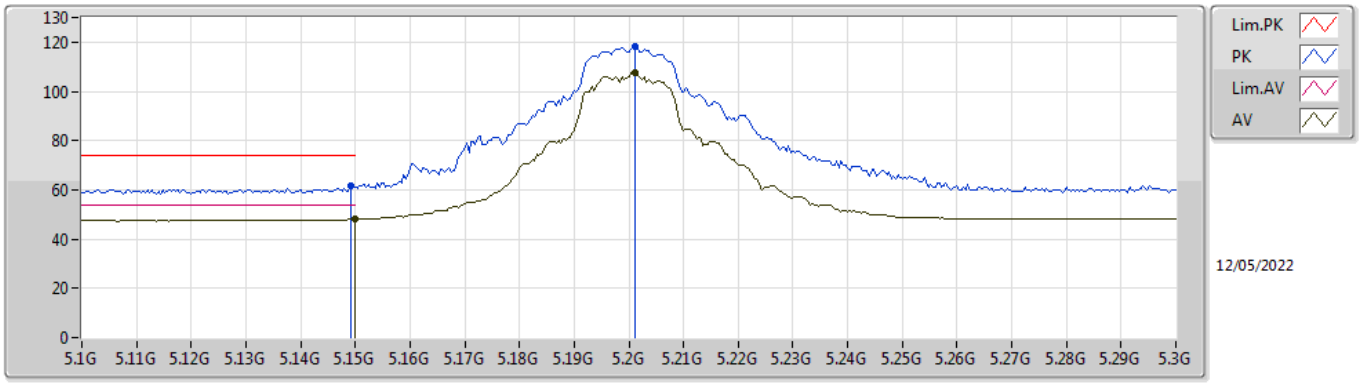


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1492G	61.58	74.00	-12.42	55.75	3	Horizontal	198	2.21	-	34.00	7.17	35.34
AV	5.15G	48.05	54.00	-5.95	42.22	3	Horizontal	198	2.21	-	34.00	7.17	35.34
PK	5.2012G	118.00	Inf	-Inf	111.94	3	Horizontal	198	2.21	-	34.20	7.20	35.34
AV	5.2012G	107.66	Inf	-Inf	101.60	3	Horizontal	198	2.21	-	34.20	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5200MHz_TnomVnom

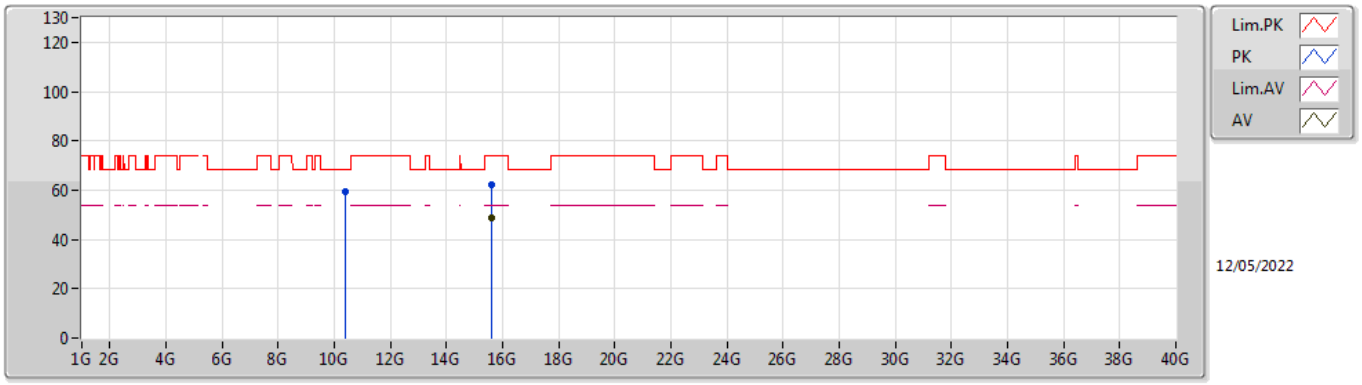


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.40336G	59.13	68.20	-9.07	45.92	3	Vertical	225	1.79	-	38.20	10.56	35.55
PK	15.59996G	62.47	74.00	-11.53	46.72	3	Vertical	39	1.52	-	38.00	13.20	35.45
AV	15.60006G	48.74	54.00	-5.26	32.99	3	Vertical	39	1.52	-	38.00	13.20	35.45

802.11a_Nss1,(6Mbps)_2TX

5200MHz_TnomVnom

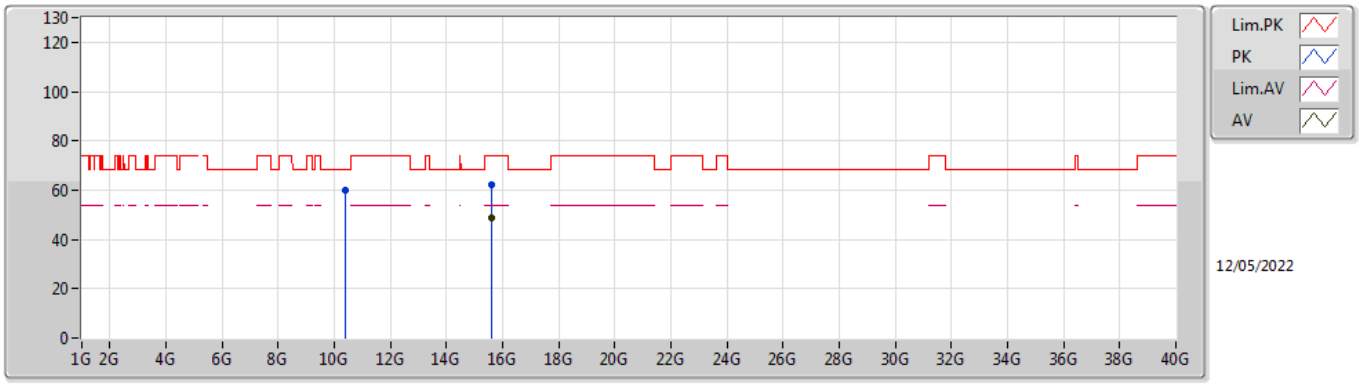


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.40786G	59.71	68.20	-8.49	46.49	3	Horizontal	198	1.80	-	38.20	10.56	35.54
PK	15.6014G	62.37	74.00	-11.63	46.64	3	Horizontal	339	1.41	-	37.99	13.20	35.46
AV	15.60034G	48.69	54.00	-5.31	32.94	3	Horizontal	339	1.41	-	38.00	13.20	35.45

802.11a_Nss1,(6Mbps)_2TX

5240MHz_TnomVnom

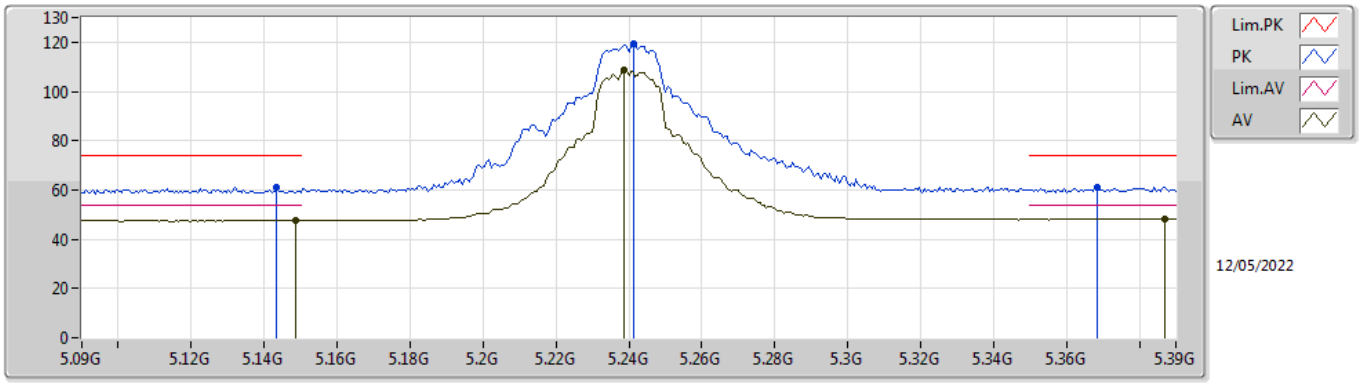


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1434G	60.94	74.00	-13.06	55.12	3	Vertical	223	2.04	-	33.99	7.17	35.34
AV	5.1488G	47.70	54.00	-6.30	41.87	3	Vertical	223	2.04	-	34.00	7.17	35.34
PK	5.2412G	119.37	Inf	-Inf	113.15	3	Vertical	223	2.04	-	34.36	7.20	35.34
AV	5.2388G	108.60	Inf	-Inf	102.38	3	Vertical	223	2.04	-	34.36	7.20	35.34
PK	5.3684G	60.91	74.00	-13.09	54.51	3	Vertical	223	2.04	-	34.54	7.20	35.34
AV	5.387G	48.24	54.00	-5.76	41.82	3	Vertical	223	2.04	-	34.57	7.20	35.35

802.11a_Nss1,(6Mbps)_2TX

5240MHz_TnomVnom

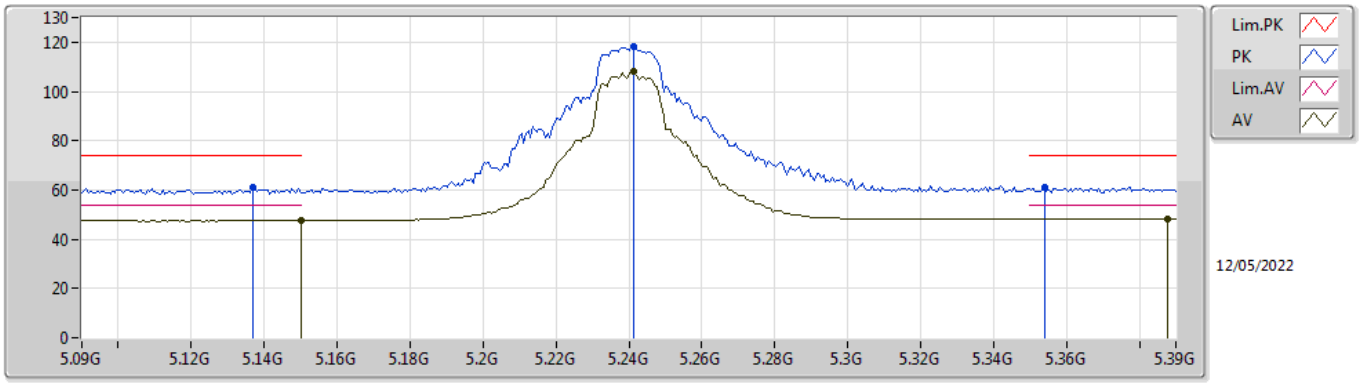


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1368G	61.16	74.00	-12.84	55.36	3	Horizontal	198	2.20	-	33.97	7.17	35.34
AV	5.15G	47.64	54.00	-6.36	41.81	3	Horizontal	198	2.20	-	34.00	7.17	35.34
PK	5.2412G	118.30	Inf	-Inf	112.08	3	Horizontal	198	2.20	-	34.36	7.20	35.34
AV	5.2412G	108.04	Inf	-Inf	101.82	3	Horizontal	198	2.20	-	34.36	7.20	35.34
PK	5.354G	61.15	74.00	-12.85	54.78	3	Horizontal	198	2.20	-	34.51	7.20	35.34
AV	5.3876G	48.23	54.00	-5.77	41.80	3	Horizontal	198	2.20	-	34.58	7.20	35.35

802.11a_Nss1,(6Mbps)_2TX

5240MHz_TnomVnom

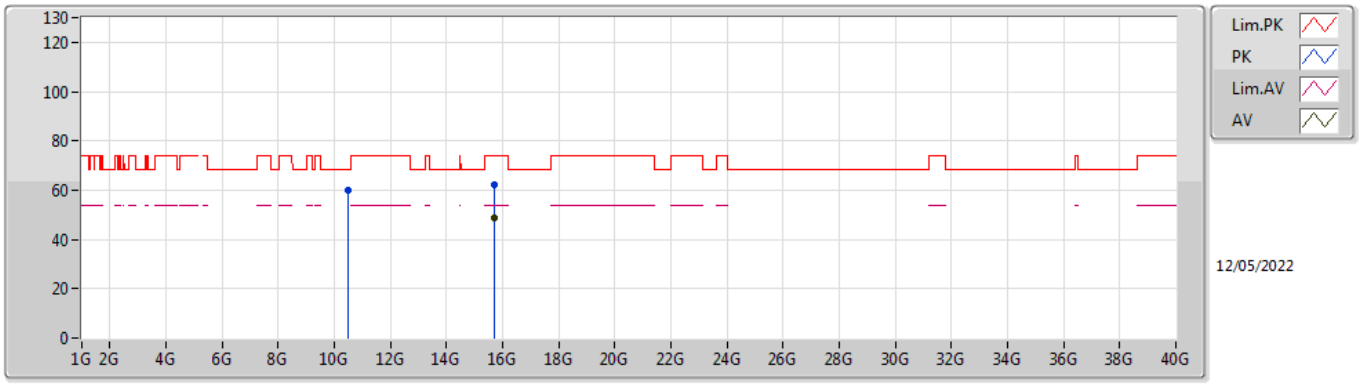


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.4836G	60.06	68.20	-8.14	46.77	3	Vertical	226	1.78	-	38.20	10.57	35.48
PK	15.71902G	62.08	74.00	-11.92	46.79	3	Vertical	136	2.49	-	37.58	13.26	35.55
AV	15.72119G	48.51	54.00	-5.49	33.23	3	Vertical	136	2.49	-	37.58	13.26	35.56

802.11a_Nss1,(6Mbps)_2TX

5240MHz_TnomVnom

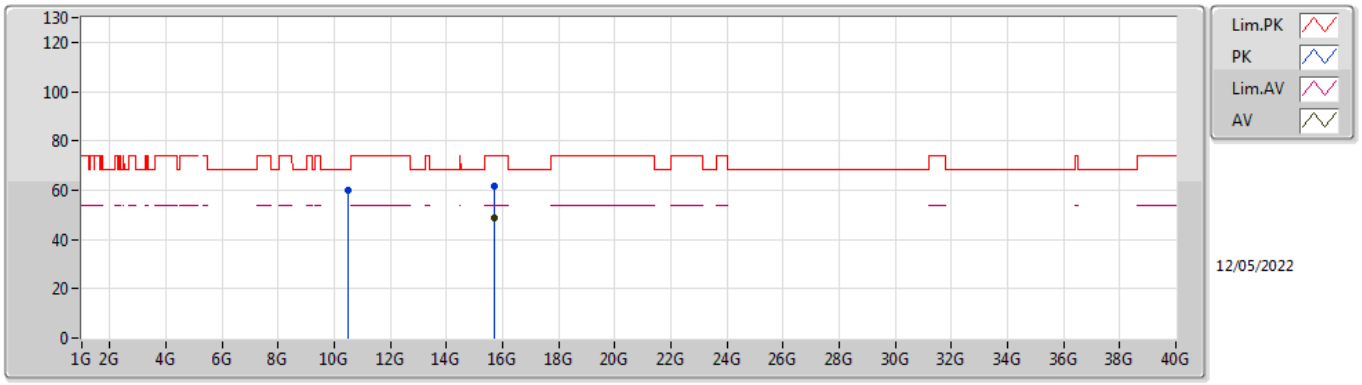


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.48252G	60.16	68.20	-8.04	46.87	3	Horizontal	198	1.79	-	38.20	10.57	35.48
PK	15.71866G	61.84	74.00	-12.16	46.56	3	Horizontal	285	2.16	-	37.57	13.26	35.55
AV	15.72011G	48.57	54.00	-5.43	33.28	3	Horizontal	285	2.16	-	37.58	13.26	35.55

802.11a_Nss1,(6Mbps)_2TX

5260MHz_TnomVnom

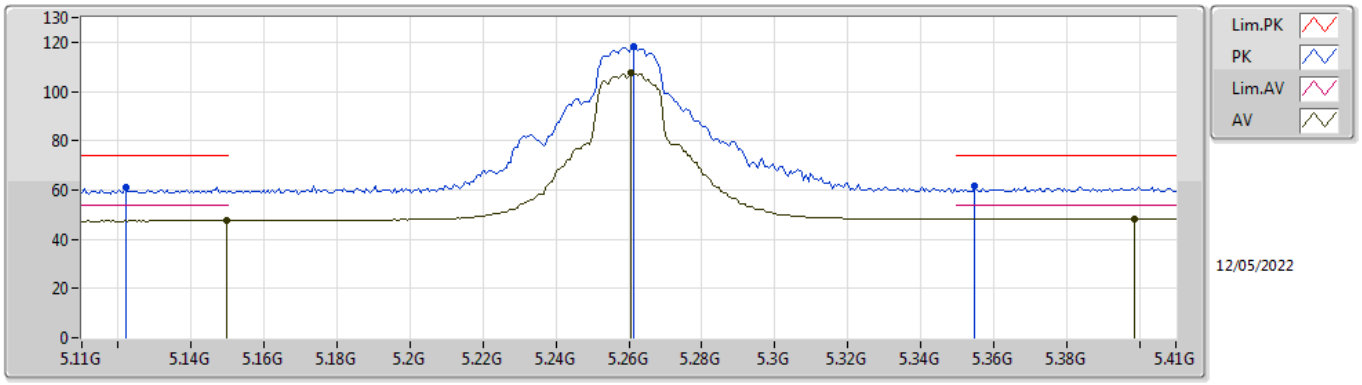


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.122G	61.13	74.00	-12.87	55.36	3	Vertical	216	2.05	-	33.94	7.16	35.33
AV	5.1496G	47.60	54.00	-6.40	41.77	3	Vertical	216	2.05	-	34.00	7.17	35.34
PK	5.2612G	118.06	Inf	-Inf	111.78	3	Vertical	216	2.05	-	34.42	7.20	35.34
AV	5.2606G	107.54	Inf	-Inf	101.26	3	Vertical	216	2.05	-	34.42	7.20	35.34
PK	5.3548G	61.86	74.00	-12.14	55.49	3	Vertical	216	2.05	-	34.51	7.20	35.34
AV	5.3986G	48.44	54.00	-5.56	41.99	3	Vertical	216	2.05	-	34.60	7.20	35.35

802.11a_Nss1,(6Mbps)_2TX

5260MHz_TnomVnom

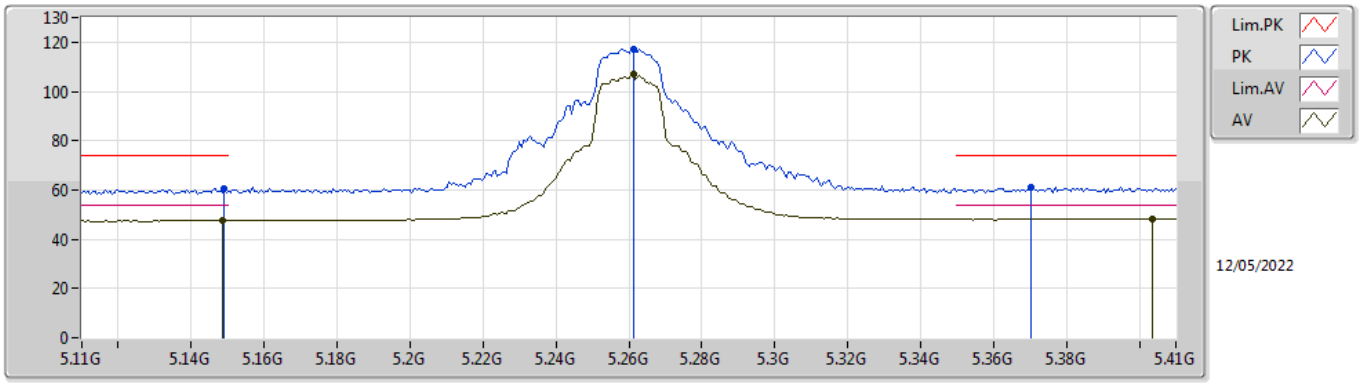


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.149G	60.37	74.00	-13.63	54.54	3	Horizontal	197	2.21	-	34.00	7.17	35.34
AV	5.1484G	47.55	54.00	-6.45	41.72	3	Horizontal	197	2.21	-	34.00	7.17	35.34
PK	5.2612G	117.10	Inf	-Inf	110.82	3	Horizontal	197	2.21	-	34.42	7.20	35.34
AV	5.2612G	106.80	Inf	-Inf	100.52	3	Horizontal	197	2.21	-	34.42	7.20	35.34
PK	5.3704G	61.15	74.00	-12.85	54.75	3	Horizontal	197	2.21	-	34.54	7.20	35.34
AV	5.4034G	48.36	54.00	-5.64	41.92	3	Horizontal	197	2.21	-	34.59	7.20	35.35

802.11a_Nss1,(6Mbps)_2TX

5260MHz_TnomVnom

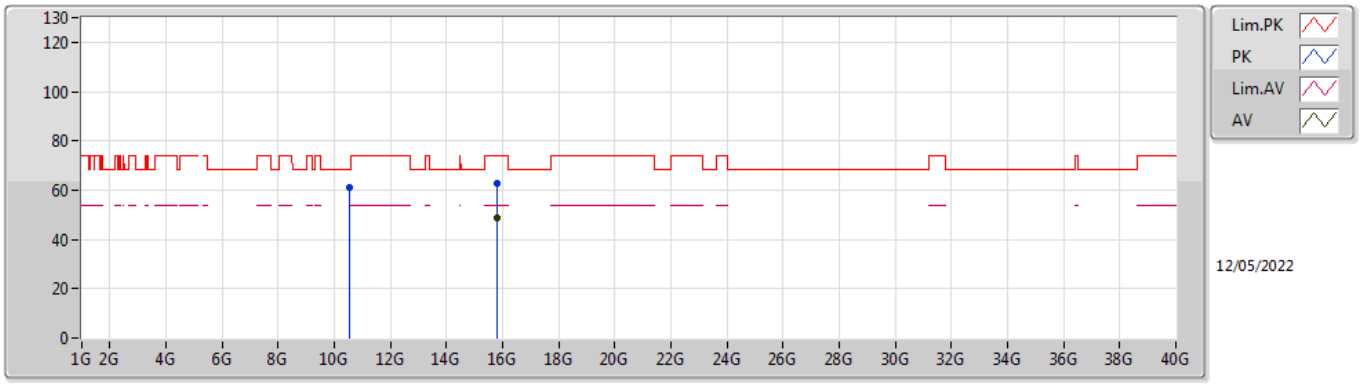


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.523G	61.28	68.20	-6.92	47.95	3	Vertical	226	1.80	-	38.20	10.58	35.45
PK	15.78131G	62.90	74.00	-11.10	47.39	3	Vertical	99	2.71	-	37.83	13.29	35.61
AV	15.77897G	48.56	54.00	-5.44	33.05	3	Vertical	99	2.71	-	37.82	13.29	35.60

802.11a_Nss1,(6Mbps)_2TX

5260MHz_TnomVnom

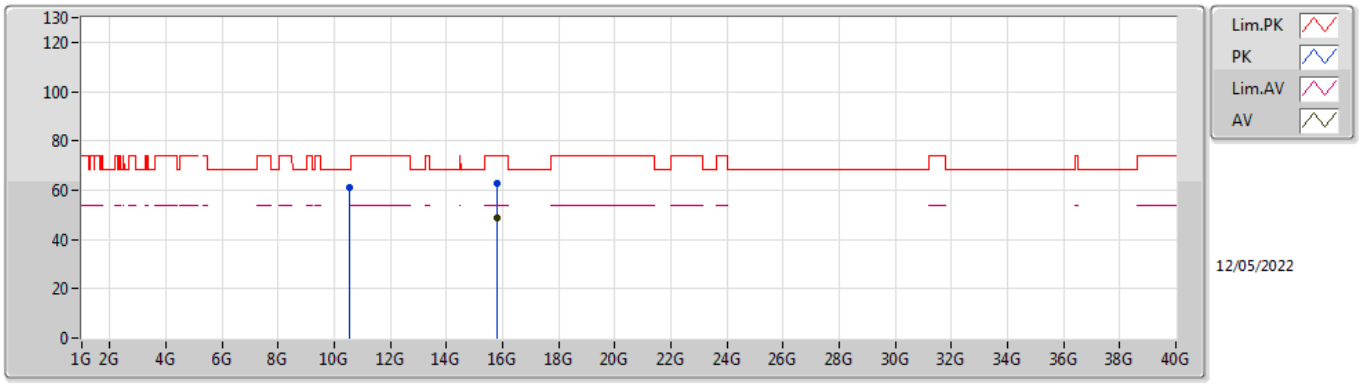


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.51742G	60.93	68.20	-7.27	47.61	3	Horizontal	199	1.80	-	38.20	10.58	35.46
PK	15.78118G	62.55	74.00	-11.45	47.05	3	Horizontal	44	2.94	-	37.82	13.29	35.61
AV	15.78127G	48.61	54.00	-5.39	33.10	3	Horizontal	44	2.94	-	37.83	13.29	35.61

802.11a_Nss1,(6Mbps)_2TX

5300MHz_TnomVnom

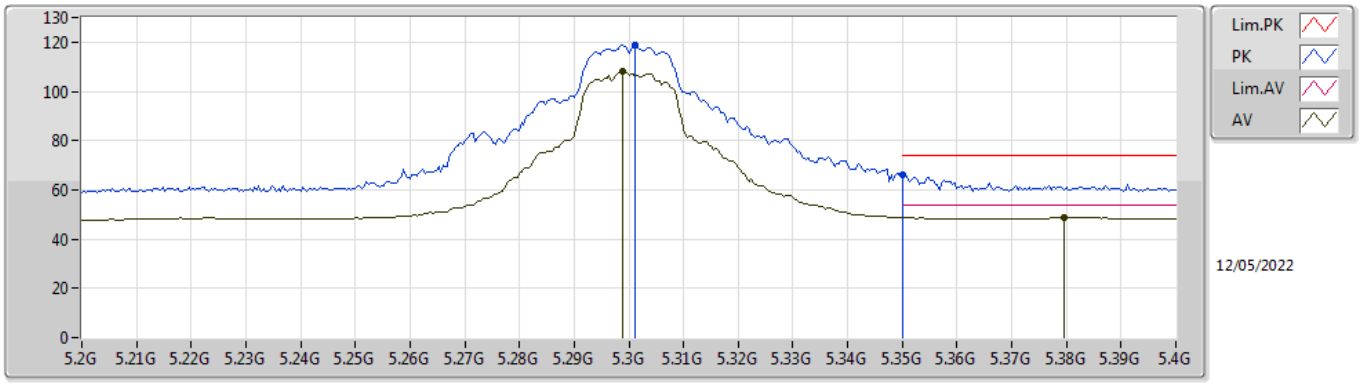


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3012G	118.71	Inf	-Inf	112.35	3	Vertical	222	2.01	-	34.50	7.20	35.34
AV	5.2988G	108.14	Inf	-Inf	101.78	3	Vertical	222	2.01	-	34.50	7.20	35.34
PK	5.35G	66.32	74.00	-7.68	59.96	3	Vertical	222	2.01	-	34.50	7.20	35.34
AV	5.3796G	48.83	54.00	-5.17	42.42	3	Vertical	222	2.01	-	34.56	7.20	35.35

802.11a_Nss1,(6Mbps)_2TX

5300MHz_TnomVnom

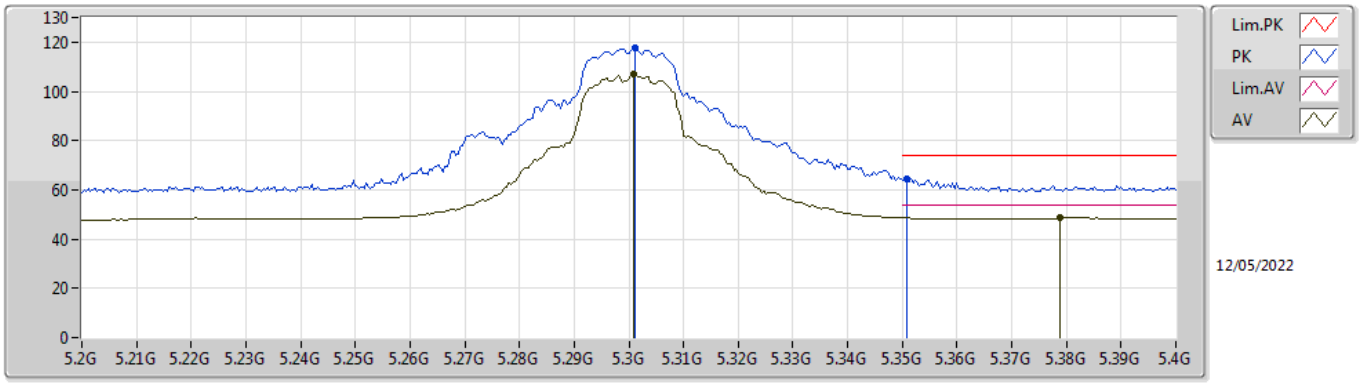


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3012G	117.64	Inf	-Inf	111.28	3	Horizontal	198	1.98	-	34.50	7.20	35.34
AV	5.3008G	107.24	Inf	-Inf	100.88	3	Horizontal	198	1.98	-	34.50	7.20	35.34
PK	5.3508G	64.46	74.00	-9.54	58.10	3	Horizontal	198	1.98	-	34.50	7.20	35.34
AV	5.3788G	48.80	54.00	-5.20	42.39	3	Horizontal	198	1.98	-	34.56	7.20	35.35

802.11a_Nss1,(6Mbps)_2TX

5300MHz_TnomVnom

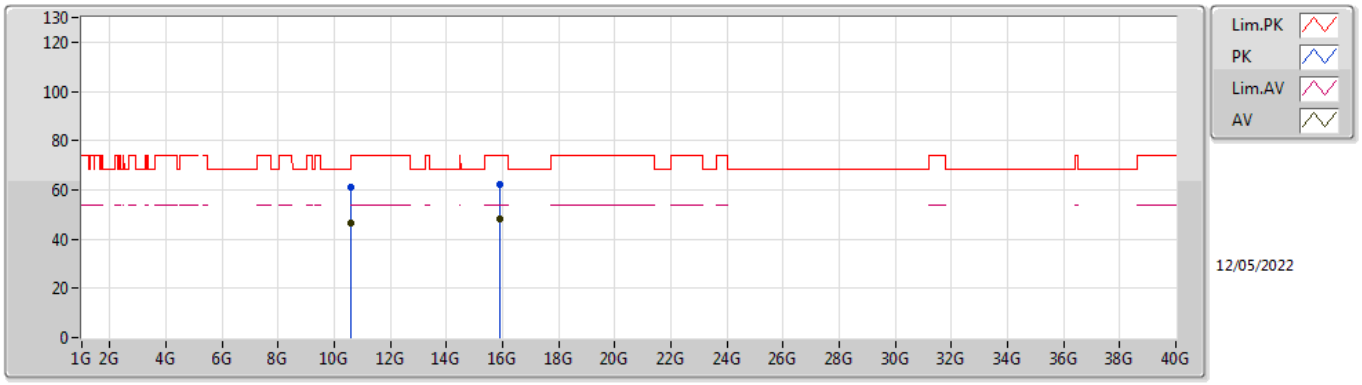


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60004G	60.94	74.00	-13.06	47.53	3	Vertical	357	1.80	-	38.20	10.59	35.38
AV	10.60234G	46.72	54.00	-7.28	33.31	3	Vertical	357	1.80	-	38.20	10.59	35.38
PK	15.9011G	61.99	74.00	-12.01	46.75	3	Vertical	153	1.61	-	37.60	13.35	35.71
AV	15.9G	48.17	54.00	-5.83	32.93	3	Vertical	153	1.61	-	37.60	13.35	35.71

802.11a_Nss1,(6Mbps)_2TX

5300MHz_TnomVnom

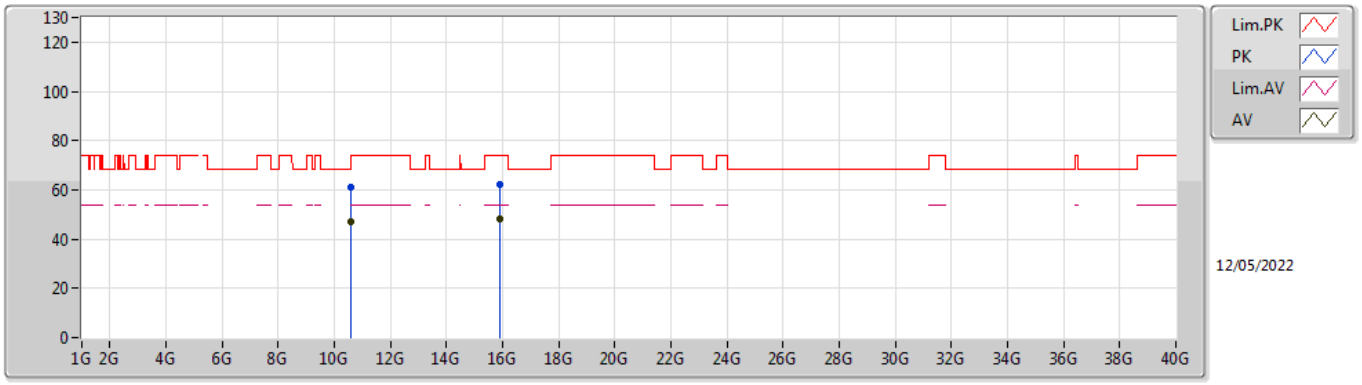


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60318G	61.02	74.00	-12.98	47.60	3	Horizontal	222	2.04	-	38.21	10.59	35.38
AV	10.60258G	47.18	54.00	-6.82	33.76	3	Horizontal	222	2.04	-	38.21	10.59	35.38
PK	15.90032G	62.00	74.00	-12.00	46.76	3	Horizontal	120	1.80	-	37.60	13.35	35.71
AV	15.90027G	48.17	54.00	-5.83	32.93	3	Horizontal	120	1.80	-	37.60	13.35	35.71

802.11a_Nss1,(6Mbps)_2TX

5320MHz_TnomVnom

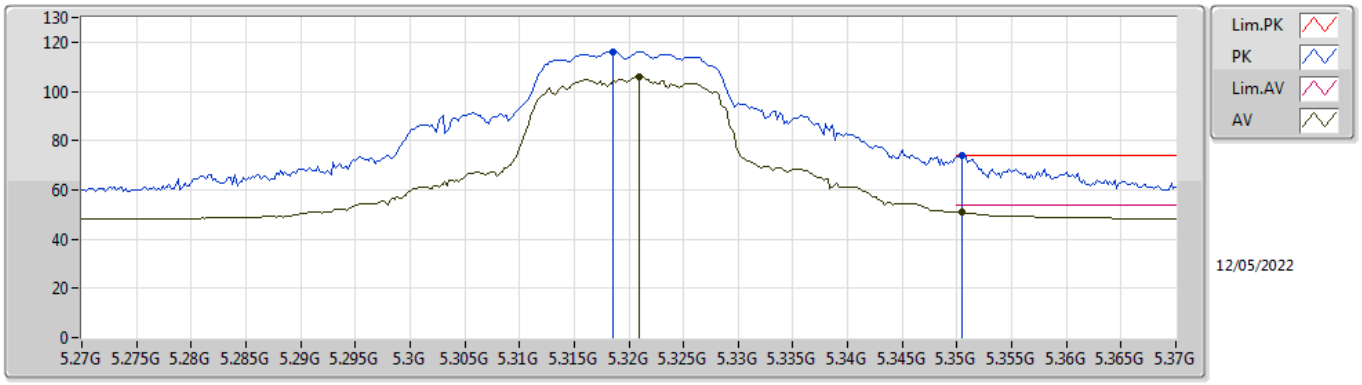


EUT X_2TX
Setting 17.25
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3186G	116.22	Inf	-Inf	109.86	3	Vertical	215	1.92	-	34.50	7.20	35.34
AV	5.321G	105.85	Inf	-Inf	99.49	3	Vertical	215	1.92	-	34.50	7.20	35.34
PK	5.3504G	73.75	74.00	-0.25	67.39	3	Vertical	215	1.92	-	34.50	7.20	35.34
AV	5.3504G	51.02	54.00	-2.98	44.66	3	Vertical	215	1.92	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5320MHz_TnomVnom

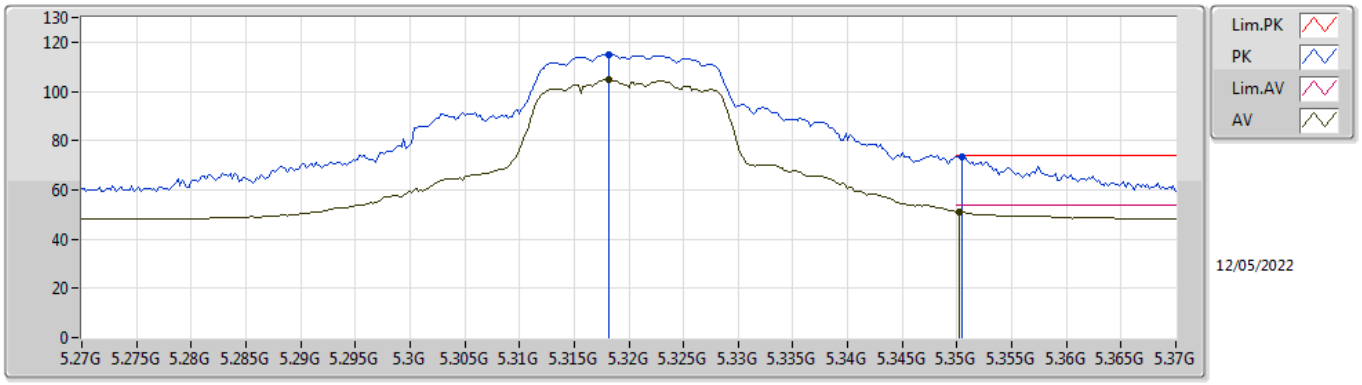


EUT X_2TX
Setting 17.25
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3182G	115.02	Inf	-Inf	108.66	3	Horizontal	195	2.15	-	34.50	7.20	35.34
AV	5.3182G	104.70	Inf	-Inf	98.34	3	Horizontal	195	2.15	-	34.50	7.20	35.34
PK	5.3504G	73.55	74.00	-0.45	67.19	3	Horizontal	195	2.15	-	34.50	7.20	35.34
AV	5.3502G	51.18	54.00	-2.82	44.82	3	Horizontal	195	2.15	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5320MHz_TnomVnom

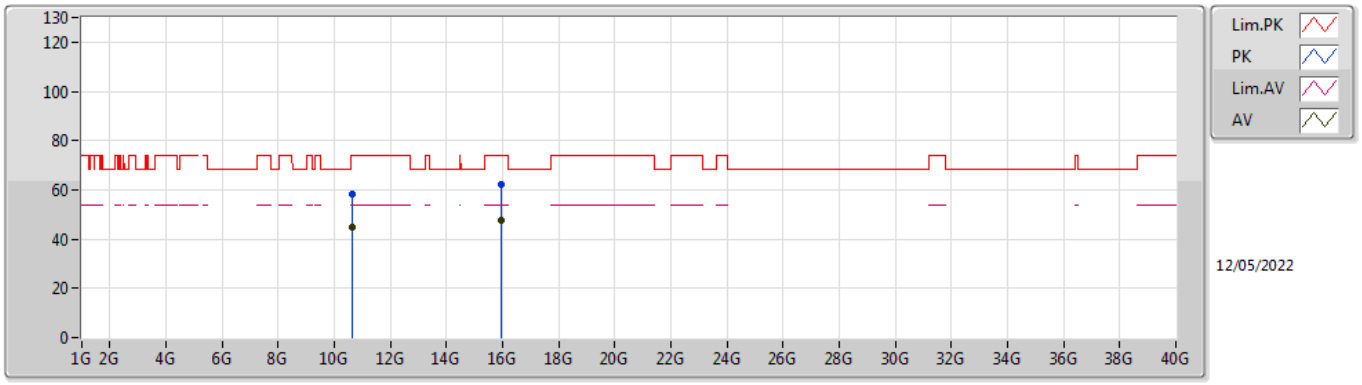


EUT X_2TX
Setting 17.25
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.63742G	58.48	74.00	-15.52	44.96	3	Vertical	357	1.74	-	38.27	10.60	35.35
AV	10.63724G	45.09	54.00	-8.91	31.57	3	Vertical	357	1.74	-	38.27	10.60	35.35
PK	15.95956G	62.15	74.00	-11.85	47.05	3	Vertical	225	2.40	-	37.48	13.38	35.76
AV	15.9586G	47.90	54.00	-6.10	32.80	3	Vertical	225	2.40	-	37.48	13.38	35.76

802.11a_Nss1,(6Mbps)_2TX

5320MHz_TnomVnom

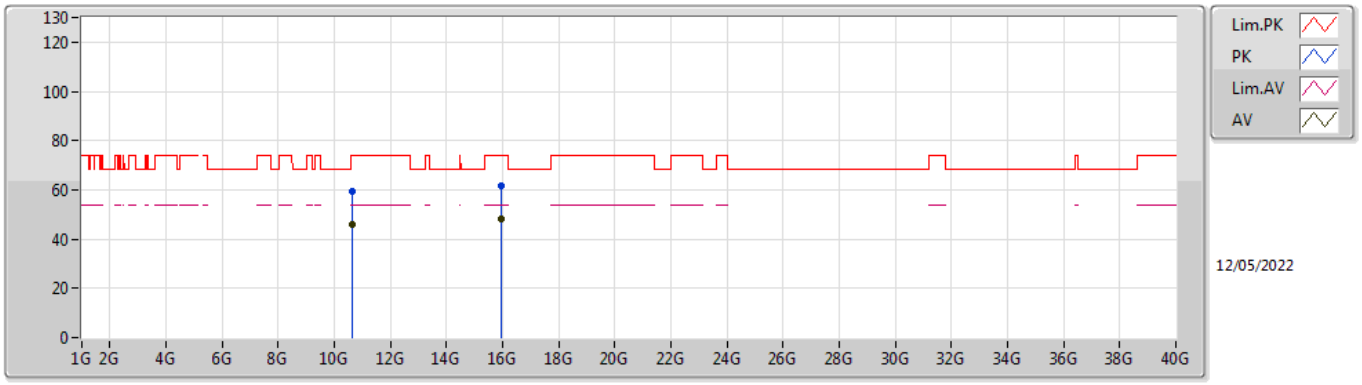


EUT X_2TX
Setting 17.25
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.63694G	59.64	74.00	-14.36	46.12	3	Horizontal	223	1.80	-	38.27	10.60	35.35
AV	10.64258G	45.77	54.00	-8.23	32.23	3	Horizontal	223	1.80	-	38.29	10.60	35.35
PK	15.95938G	61.72	74.00	-12.28	46.62	3	Horizontal	178	2.34	-	37.48	13.38	35.76
AV	15.96097G	48.05	54.00	-5.95	32.95	3	Horizontal	178	2.34	-	37.48	13.38	35.76

802.11a_Nss1,(6Mbps)_2TX

5500MHz_TnomVnom

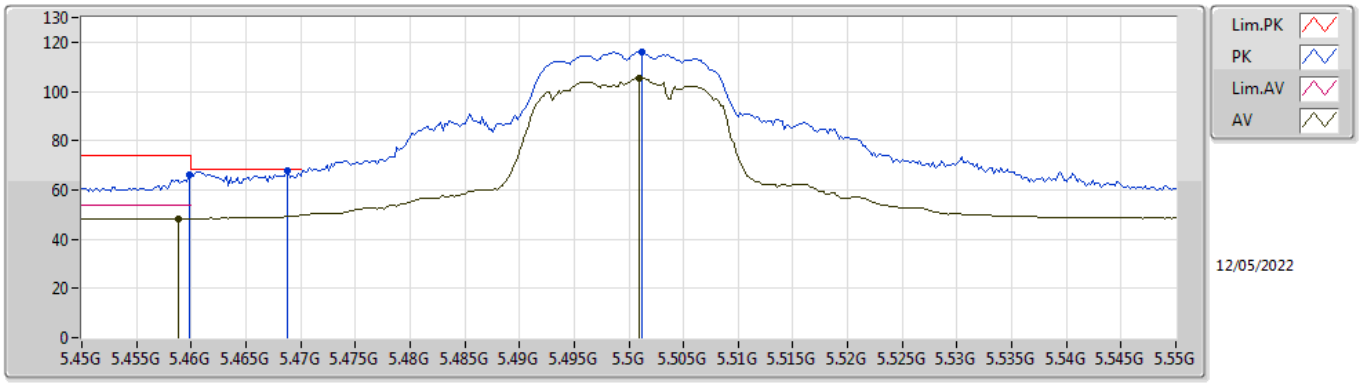


EUT X_2TX
Setting 16.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4598G	66.23	74.00	-7.77	59.80	3	Vertical	215	1.99	-	34.52	7.26	35.35
AV	5.4588G	48.30	54.00	-5.70	41.87	3	Vertical	215	1.99	-	34.52	7.26	35.35
PK	5.4688G	67.76	68.20	-0.44	61.30	3	Vertical	215	1.99	-	34.54	7.27	35.35
PK	5.5012G	115.88	Inf	-Inf	109.33	3	Vertical	215	1.99	-	34.60	7.30	35.35
AV	5.501G	105.61	Inf	-Inf	99.06	3	Vertical	215	1.99	-	34.60	7.30	35.35

802.11a_Nss1,(6Mbps)_2TX

5500MHz_TnomVnom

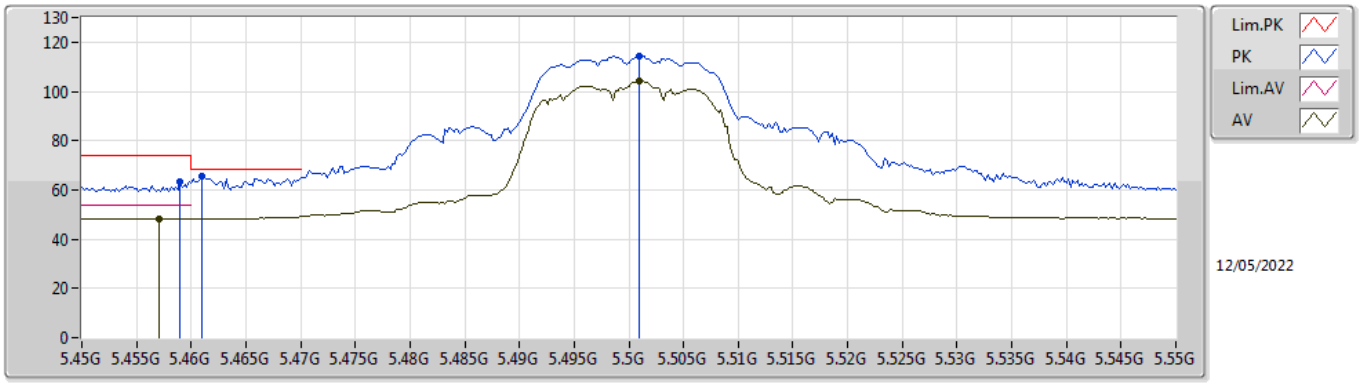


EUT X_2TX
Setting 16.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.459G	63.37	74.00	-10.63	56.94	3	Horizontal	176	1.96	-	34.52	7.26	35.35
AV	5.457G	48.23	54.00	-5.77	41.81	3	Horizontal	176	1.96	-	34.51	7.26	35.35
PK	5.461G	65.45	68.20	-2.75	59.02	3	Horizontal	176	1.96	-	34.52	7.26	35.35
PK	5.501G	114.33	Inf	-Inf	107.78	3	Horizontal	176	1.96	-	34.60	7.30	35.35
AV	5.501G	104.05	Inf	-Inf	97.50	3	Horizontal	176	1.96	-	34.60	7.30	35.35

802.11a_Nss1,(6Mbps)_2TX

5500MHz_TnomVnom

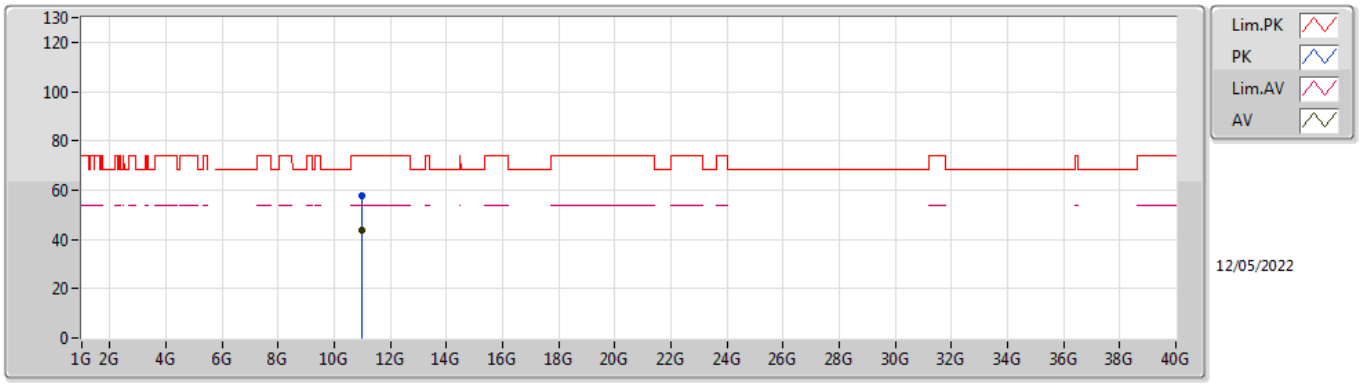


EUT X_2TX
Setting 16.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.00084G	57.67	74.00	-16.33	43.66	3	Vertical	168	2.22	-	38.40	10.65	35.04
AV	11.00118G	43.58	54.00	-10.42	29.57	3	Vertical	168	2.22	-	38.40	10.65	35.04

802.11a_Nss1,(6Mbps)_2TX

5500MHz_TnomVnom

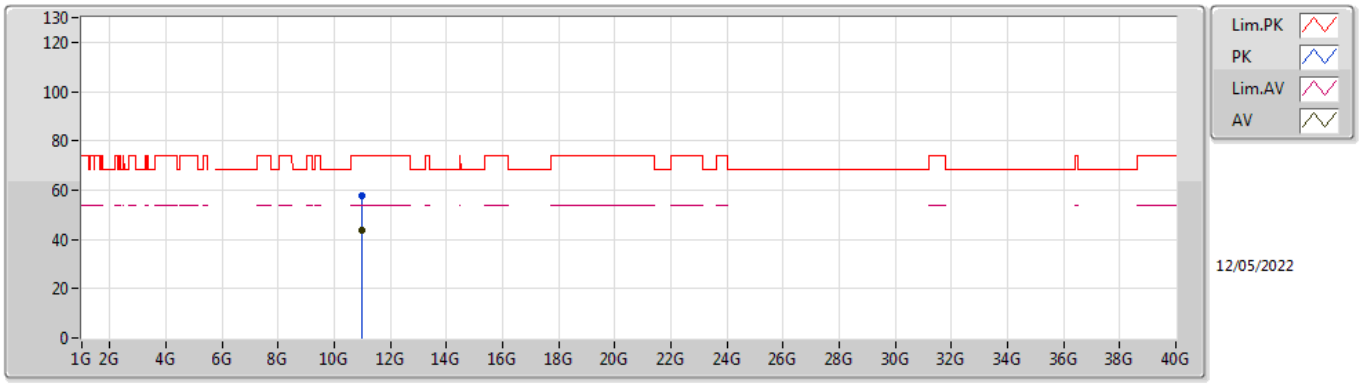


EUT X_2TX
Setting 16.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.99859G	57.69	74.00	-16.31	43.68	3	Horizontal	227	1.47	-	38.40	10.65	35.04
AV	11.00091G	43.60	54.00	-10.40	29.59	3	Horizontal	227	1.47	-	38.40	10.65	35.04

802.11a_Nss1,(6Mbps)_2TX

5580MHz_TnomVnom

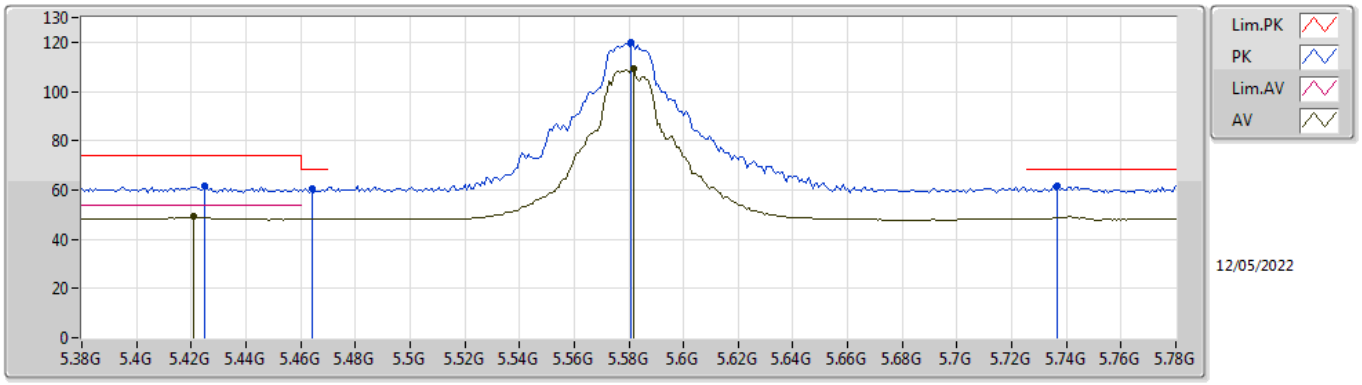


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4248G	61.60	74.00	-12.40	55.18	3	Vertical	212	2.06	-	34.55	7.22	35.35
AV	5.4208G	49.28	54.00	-4.72	42.85	3	Vertical	212	2.06	-	34.56	7.22	35.35
PK	5.464G	60.47	68.20	-7.73	54.03	3	Vertical	212	2.06	-	34.53	7.26	35.35
PK	5.5808G	119.72	Inf	-Inf	113.13	3	Vertical	212	2.06	-	34.60	7.38	35.39
AV	5.5816G	109.00	Inf	-Inf	102.41	3	Vertical	212	2.06	-	34.60	7.38	35.39
PK	5.7368G	61.77	68.20	-6.43	55.61	3	Vertical	212	2.06	-	34.23	7.40	35.47

802.11a_Nss1,(6Mbps)_2TX

5580MHz_TnomVnom

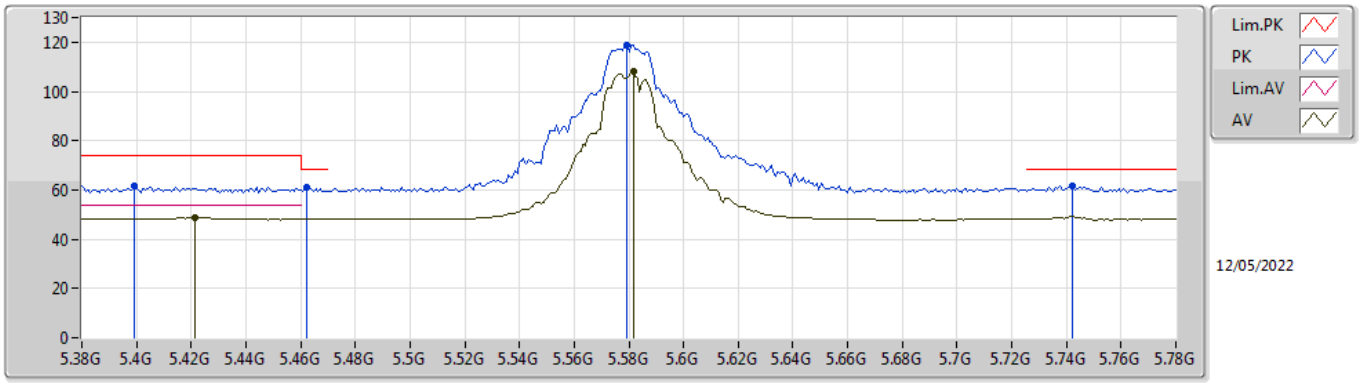


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3992G	61.63	74.00	-12.37	55.18	3	Horizontal	360	2.01	-	34.60	7.20	35.35
AV	5.4216G	48.95	54.00	-5.05	42.52	3	Horizontal	360	2.01	-	34.56	7.22	35.35
PK	5.4624G	60.83	68.20	-7.37	54.40	3	Horizontal	360	2.01	-	34.52	7.26	35.35
PK	5.5792G	118.88	Inf	-Inf	112.29	3	Horizontal	360	2.01	-	34.60	7.38	35.39
AV	5.5816G	108.28	Inf	-Inf	101.69	3	Horizontal	360	2.01	-	34.60	7.38	35.39
PK	5.7424G	61.50	68.20	-6.70	55.35	3	Horizontal	360	2.01	-	34.22	7.40	35.47

802.11a_Nss1,(6Mbps)_2TX

5580MHz_TnomVnom

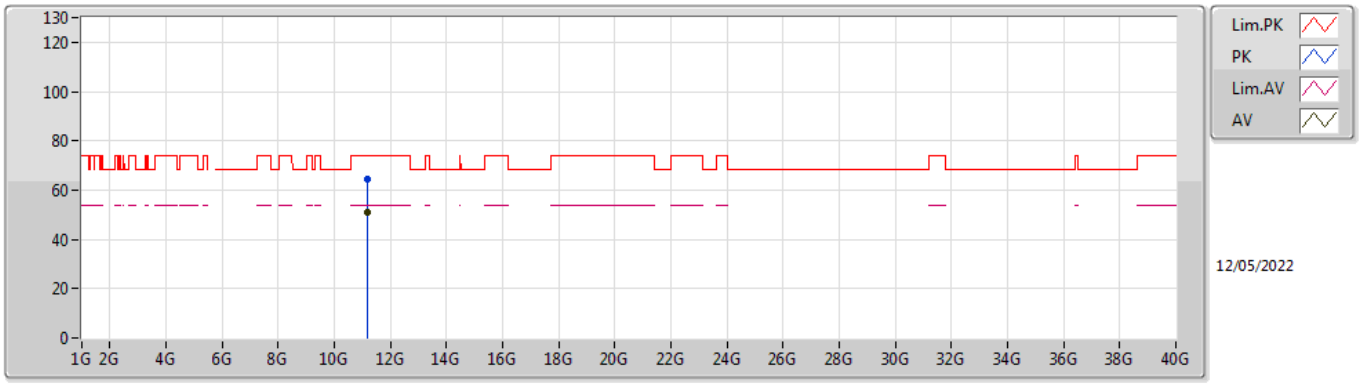


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.16384G	64.32	74.00	-9.68	50.31	3	Vertical	165	2.42	-	38.56	10.67	35.22
AV	11.15898G	50.82	54.00	-3.18	36.81	3	Vertical	165	2.42	-	38.56	10.67	35.22

802.11a_Nss1,(6Mbps)_2TX

5580MHz_TnomVnom

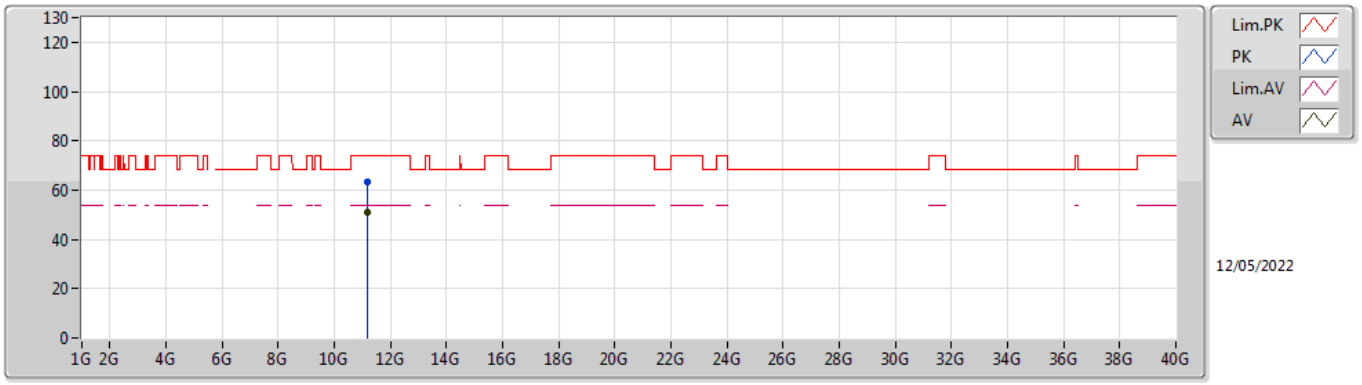


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1603G	63.50	74.00	-10.50	49.49	3	Horizontal	131	1.78	-	38.56	10.67	35.22
AV	11.16042G	50.85	54.00	-3.15	36.84	3	Horizontal	131	1.78	-	38.56	10.67	35.22

802.11a_Nss1,(6Mbps)_2TX

5700MHz_TnomVnom

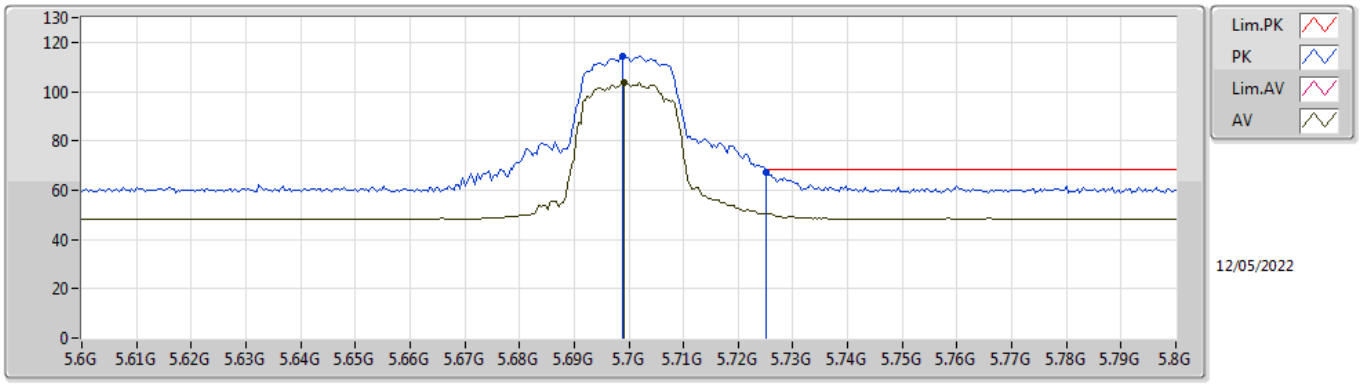


EUT X_2TX
Setting 14.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6988G	114.23	Inf	-Inf	107.98	3	Vertical	318	1.80	-	34.30	7.40	35.45
AV	5.6992G	103.92	Inf	-Inf	97.67	3	Vertical	318	1.80	-	34.30	7.40	35.45
PK	5.7252G	67.45	68.20	-0.75	61.26	3	Vertical	318	1.80	-	34.25	7.40	35.46

802.11a_Nss1,(6Mbps)_2TX

5700MHz_TnomVnom

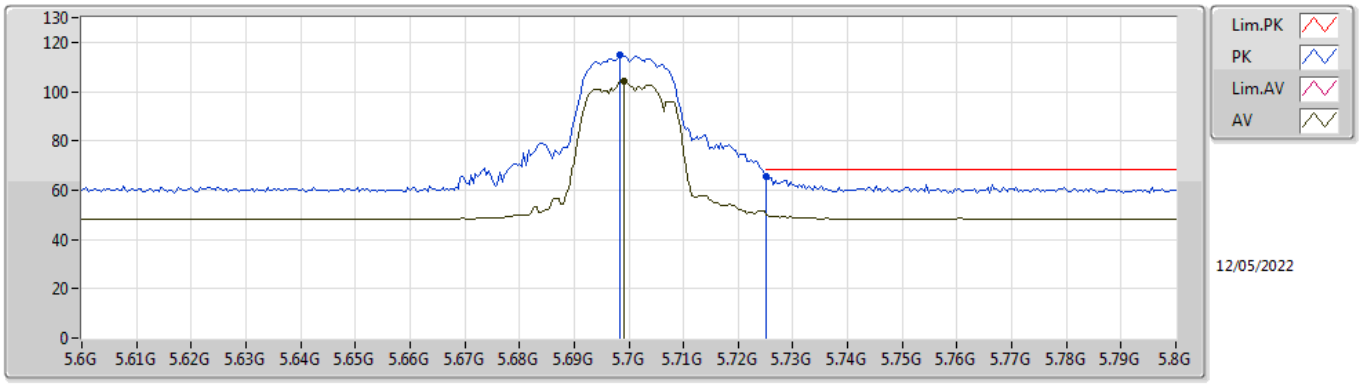


EUT X_2TX
Setting 14.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6984G	114.99	Inf	-Inf	108.73	3	Horizontal	360	1.96	-	34.31	7.40	35.45
AV	5.6992G	104.25	Inf	-Inf	98.00	3	Horizontal	360	1.96	-	34.30	7.40	35.45
PK	5.7252G	65.68	68.20	-2.52	59.49	3	Horizontal	360	1.96	-	34.25	7.40	35.46

802.11a_Nss1,(6Mbps)_2TX

5700MHz_TnomVnom

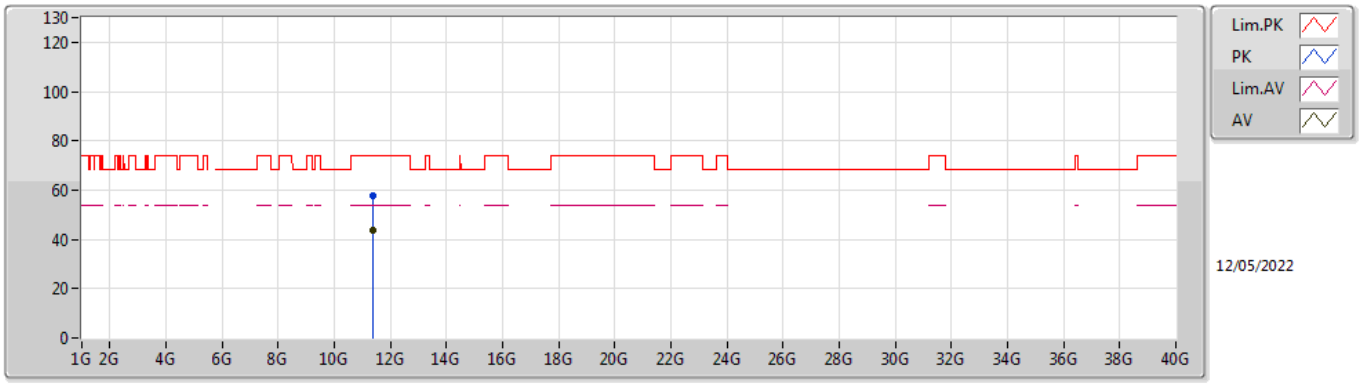


EUT X_2TX
Setting 14.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.39949G	57.74	74.00	-16.26	43.72	3	Vertical	335	2.35	-	38.80	10.71	35.49
AV	11.40063G	43.55	54.00	-10.45	29.53	3	Vertical	335	2.35	-	38.80	10.71	35.49

802.11a_Nss1,(6Mbps)_2TX

5700MHz_TnomVnom

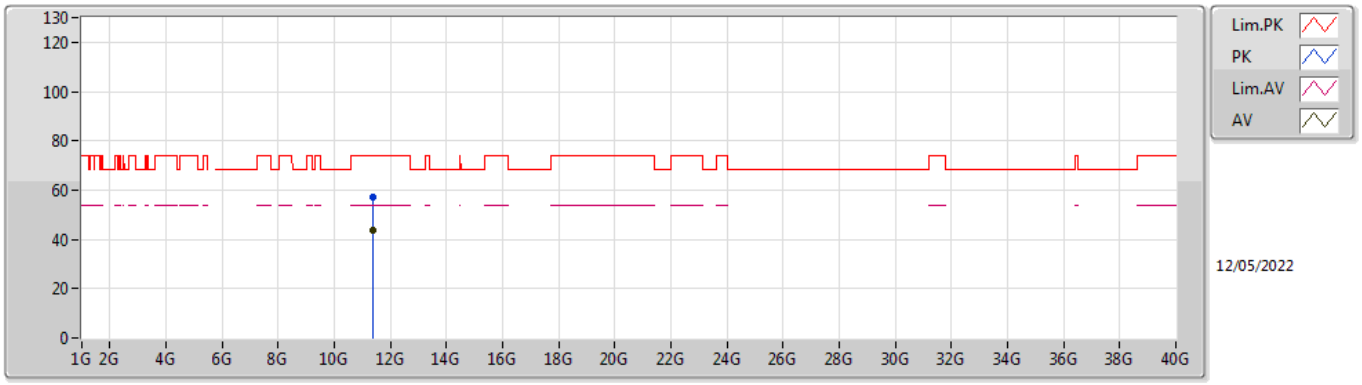


EUT X_2TX
Setting 14.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.39944G	57.42	74.00	-16.58	43.40	3	Horizontal	14	2.45	-	38.80	10.71	35.49
AV	11.40034G	43.58	54.00	-10.42	29.56	3	Horizontal	14	2.45	-	38.80	10.71	35.49

802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

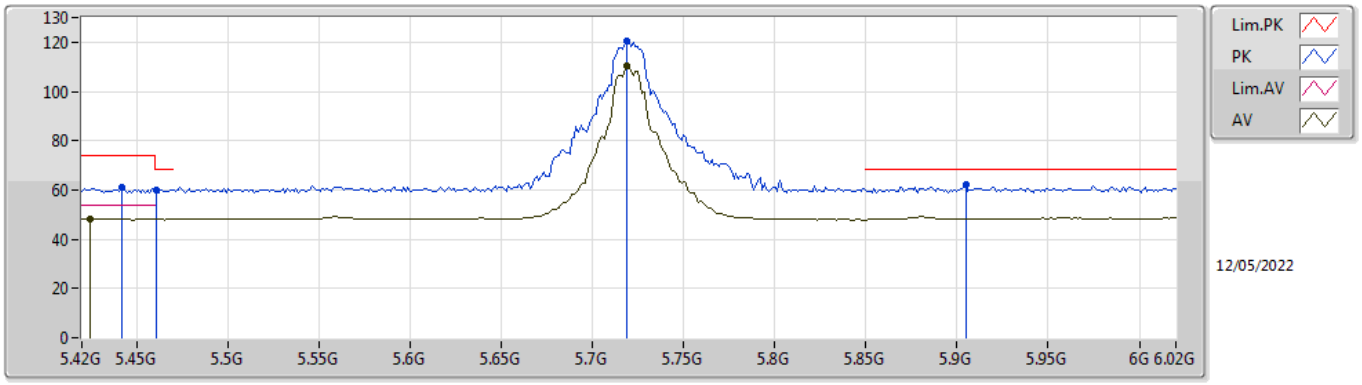


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4416G	60.90	74.00	-13.10	54.49	3	Vertical	319	1.99	-	34.52	7.24	35.35
AV	5.4248G	48.16	54.00	-5.84	41.74	3	Vertical	319	1.99	-	34.55	7.22	35.35
PK	5.4608G	60.23	68.20	-7.97	53.80	3	Vertical	319	1.99	-	34.52	7.26	35.35
PK	5.7188G	120.38	Inf	-Inf	114.18	3	Vertical	319	1.99	-	34.26	7.40	35.46
AV	5.7188G	110.13	Inf	-Inf	103.93	3	Vertical	319	1.99	-	34.26	7.40	35.46
PK	5.9048G	62.43	68.20	-5.77	55.86	3	Vertical	319	1.99	-	34.62	7.50	35.55

802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

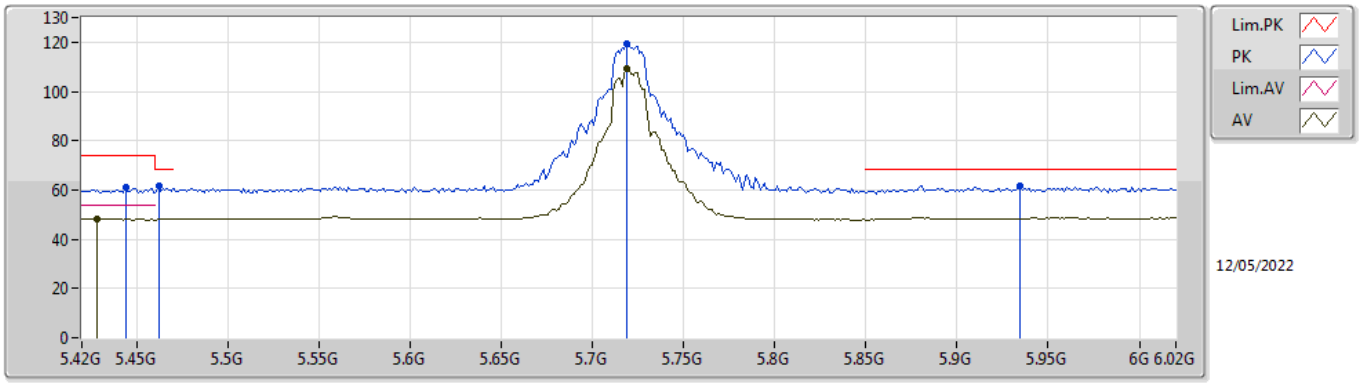


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.444G	61.32	74.00	-12.68	54.92	3	Horizontal	0	2.02	-	34.51	7.24	35.35
AV	5.4284G	48.10	54.00	-5.90	41.68	3	Horizontal	0	2.02	-	34.54	7.23	35.35
PK	5.462G	61.37	68.20	-6.83	54.94	3	Horizontal	0	2.02	-	34.52	7.26	35.35
PK	5.7188G	119.55	Inf	-Inf	113.35	3	Horizontal	0	2.02	-	34.26	7.40	35.46
AV	5.7188G	109.18	Inf	-Inf	102.98	3	Horizontal	0	2.02	-	34.26	7.40	35.46
PK	5.9348G	61.68	68.20	-6.52	54.98	3	Horizontal	0	2.02	-	34.74	7.53	35.57

802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

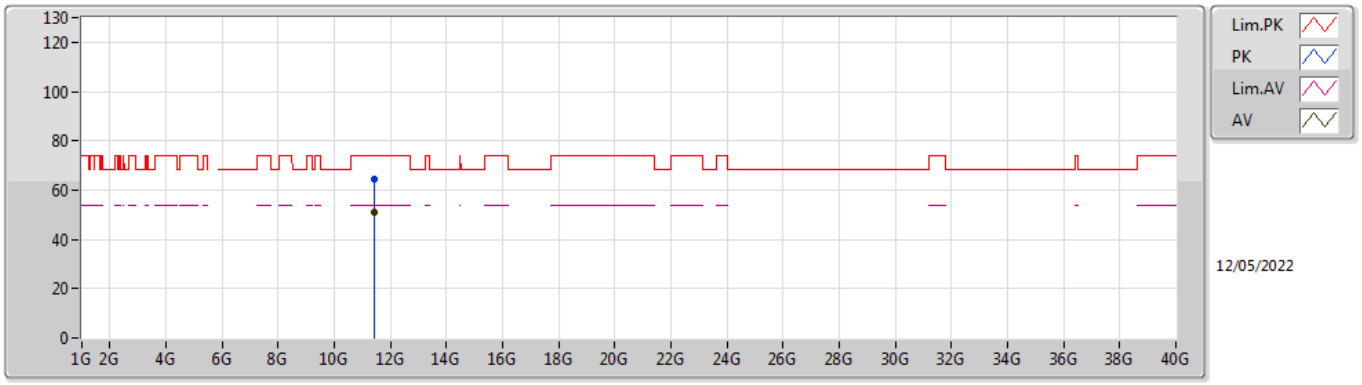


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.43922G	64.16	74.00	-9.84	50.09	3	Vertical	175	2.96	-	38.88	10.72	35.53
AV	11.4397G	51.21	54.00	-2.79	37.14	3	Vertical	175	2.96	-	38.88	10.72	35.53

802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

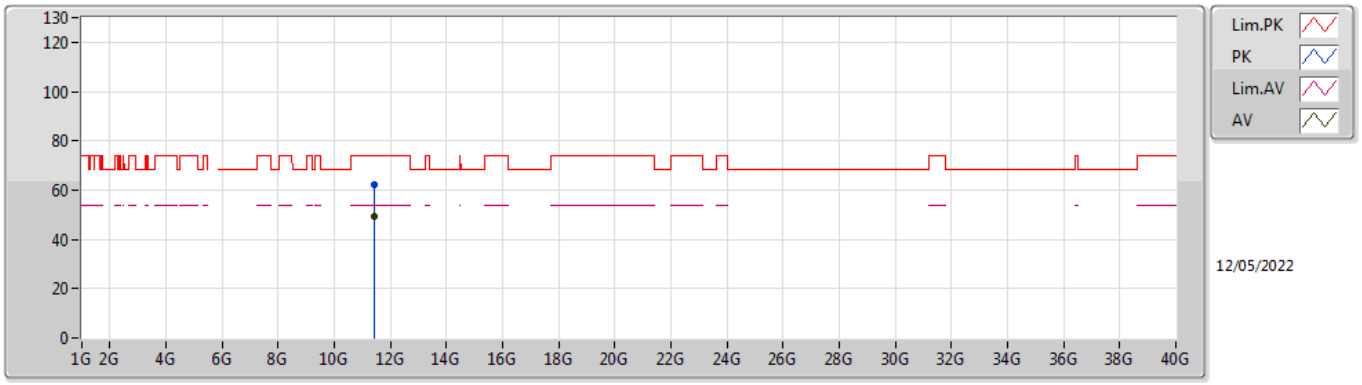


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.43544G	62.05	74.00	-11.95	47.99	3	Horizontal	135	1.80	-	38.87	10.72	35.53
AV	11.44066G	49.05	54.00	-4.95	34.98	3	Horizontal	135	1.80	-	38.88	10.72	35.53

802.11a_Nss1,(6Mbps)_2TX

5745MHz_TnomVnom

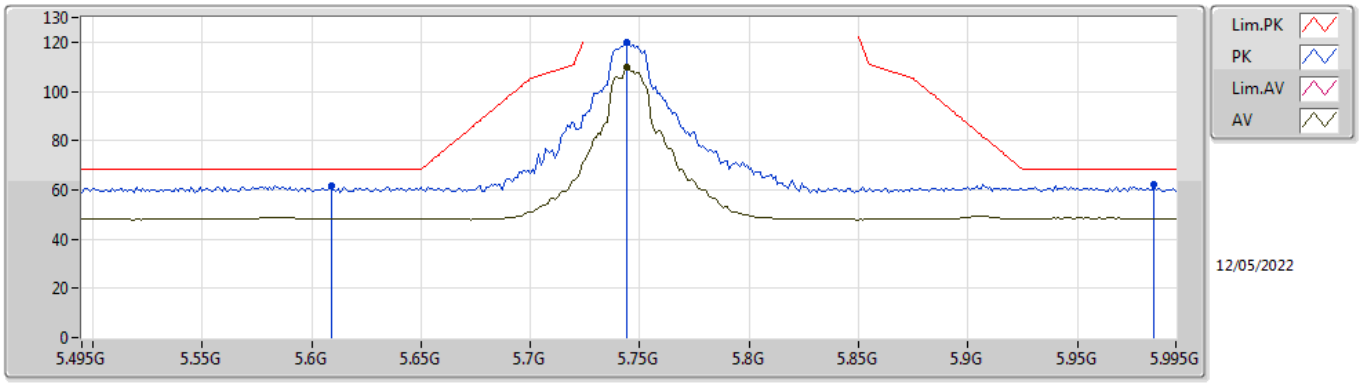


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.609G	61.63	68.20	-6.57	55.05	3	Vertical	321	1.87	-	34.58	7.40	35.40
PK	5.744G	119.97	Inf	-Inf	113.83	3	Vertical	321	1.87	-	34.21	7.40	35.47
AV	5.744G	109.57	Inf	-Inf	103.43	3	Vertical	321	1.87	-	34.21	7.40	35.47
PK	5.985G	61.96	68.20	-6.24	55.17	3	Vertical	321	1.87	-	34.80	7.58	35.59

802.11a_Nss1,(6Mbps)_2TX

5745MHz_TnomVnom

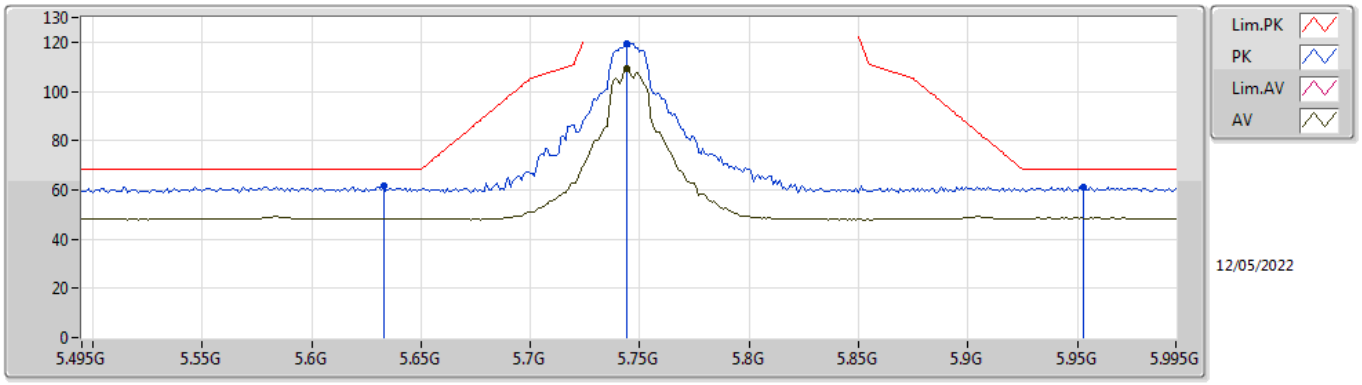


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.633G	61.46	68.20	-6.74	54.95	3	Horizontal	360	1.93	-	34.53	7.40	35.42
PK	5.744G	119.60	Inf	-Inf	113.46	3	Horizontal	360	1.93	-	34.21	7.40	35.47
AV	5.744G	109.13	Inf	-Inf	102.99	3	Horizontal	360	1.93	-	34.21	7.40	35.47
PK	5.953G	61.22	68.20	-6.98	54.45	3	Horizontal	360	1.93	-	34.80	7.55	35.58

802.11a_Nss1,(6Mbps)_2TX

5745MHz_TnomVnom

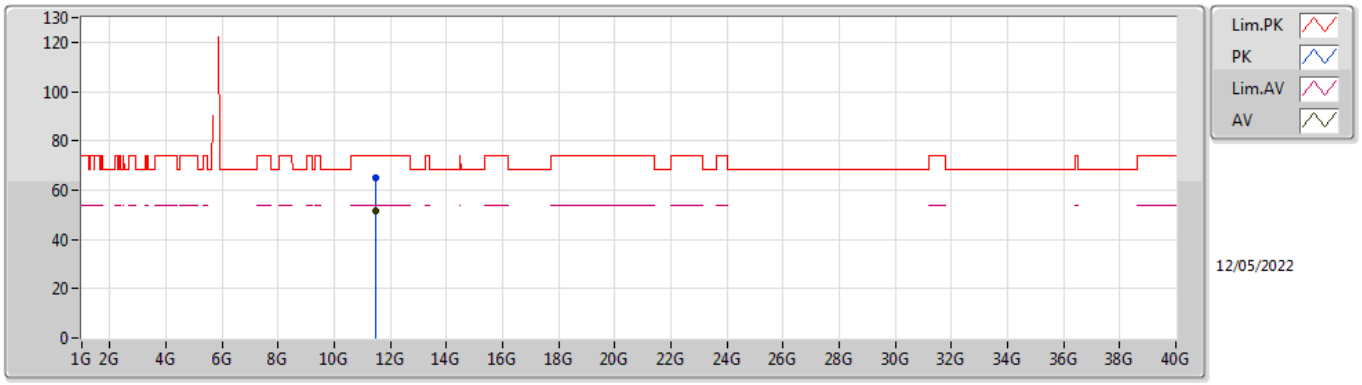


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4897G	64.97	74.00	-9.03	50.86	3	Vertical	175	3.00	-	38.98	10.72	35.59
AV	11.48964G	51.40	54.00	-2.60	37.29	3	Vertical	175	3.00	-	38.98	10.72	35.59

802.11a_Nss1,(6Mbps)_2TX

5745MHz_TnomVnom

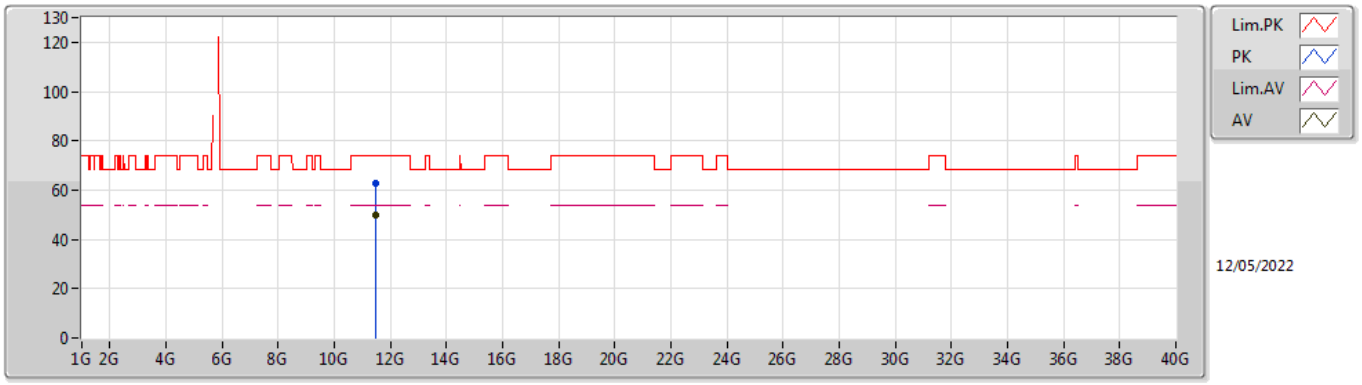


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.49108G	62.92	74.00	-11.08	48.81	3	Horizontal	190	1.80	-	38.98	10.72	35.59
AV	11.49126G	49.96	54.00	-4.04	35.85	3	Horizontal	190	1.80	-	38.98	10.72	35.59

802.11a_Nss1,(6Mbps)_2TX

5785MHz_TnomVnom

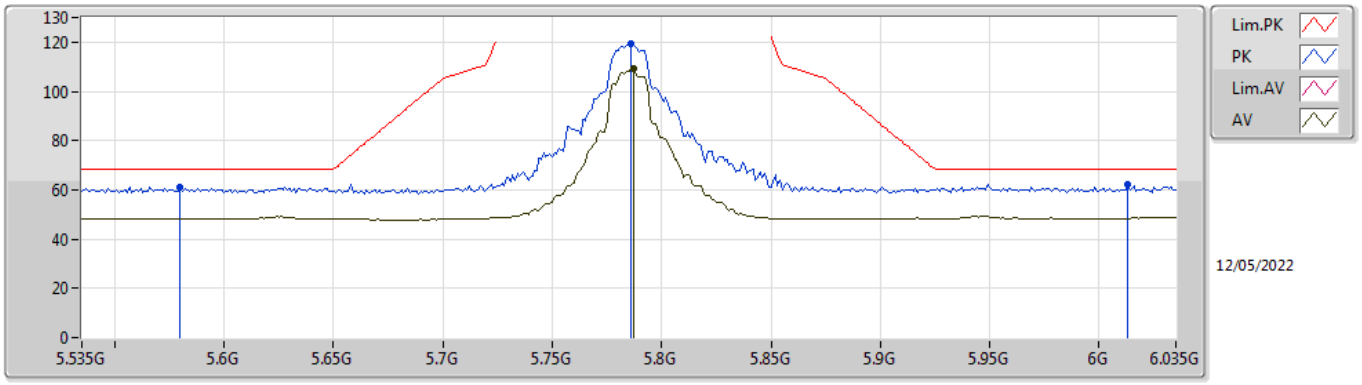


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.58G	61.33	68.20	-6.87	54.74	3	Vertical	321	2.02	-	34.60	7.38	35.39
PK	5.786G	119.55	Inf	-Inf	113.44	3	Vertical	321	2.02	-	34.20	7.40	35.49
AV	5.787G	109.41	Inf	-Inf	103.30	3	Vertical	321	2.02	-	34.20	7.40	35.49
PK	6.013G	61.99	68.20	-6.21	55.14	3	Vertical	321	2.02	-	34.83	7.61	35.59

802.11a_Nss1,(6Mbps)_2TX

5785MHz_TnomVnom

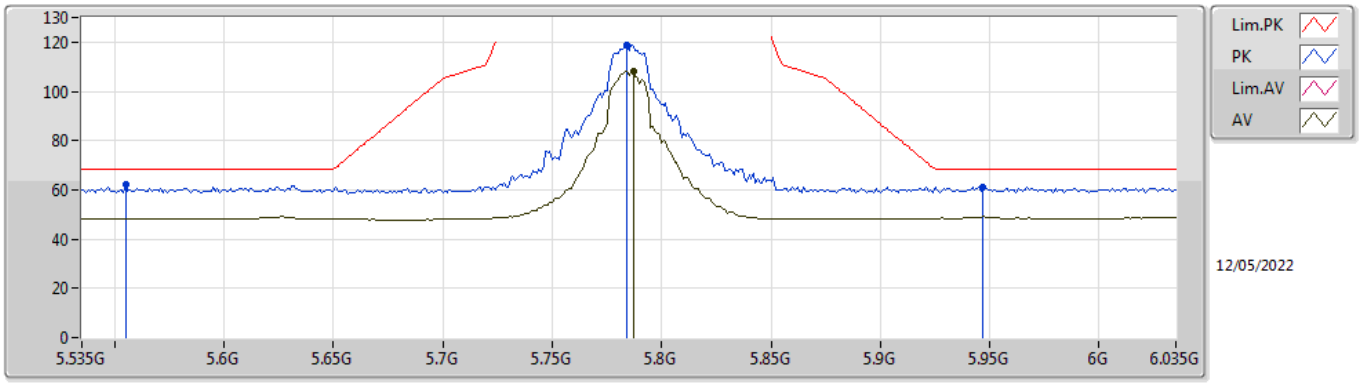


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.555G	62.01	68.20	-6.19	55.43	3	Horizontal	0	2.09	-	34.60	7.36	35.38
PK	5.784G	118.77	Inf	-Inf	112.66	3	Horizontal	0	2.09	-	34.20	7.40	35.49
AV	5.787G	108.18	Inf	-Inf	102.07	3	Horizontal	0	2.09	-	34.20	7.40	35.49
PK	5.947G	61.19	68.20	-7.01	54.42	3	Horizontal	0	2.09	-	34.79	7.55	35.57

802.11a_Nss1,(6Mbps)_2TX

5785MHz_TnomVnom

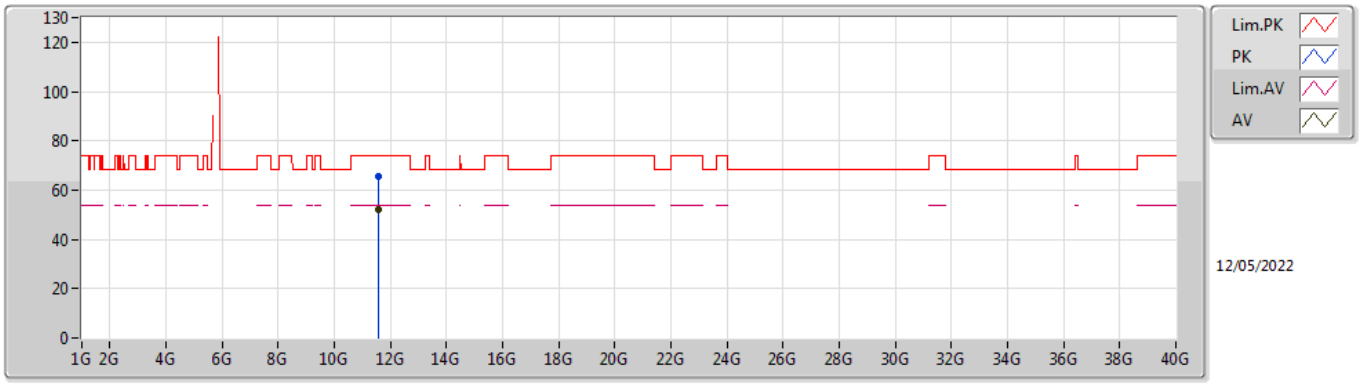


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.56946G	65.64	74.00	-8.36	51.20	3	Vertical	175	2.97	-	39.28	10.74	35.58
AV	11.56988G	52.14	54.00	-1.86	37.70	3	Vertical	175	2.97	-	39.28	10.74	35.58

802.11a_Nss1,(6Mbps)_2TX

5785MHz_TnomVnom

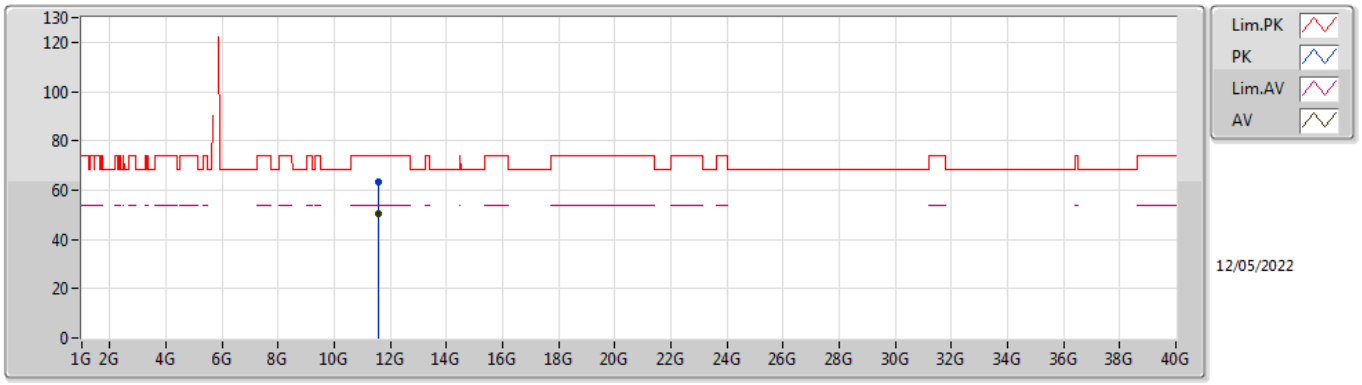


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.57138G	63.29	74.00	-10.71	48.84	3	Horizontal	136	1.75	-	39.29	10.74	35.58
AV	11.57126G	50.35	54.00	-3.65	35.90	3	Horizontal	136	1.75	-	39.29	10.74	35.58

802.11a_Nss1,(6Mbps)_2TX

5825MHz_TnomVnom

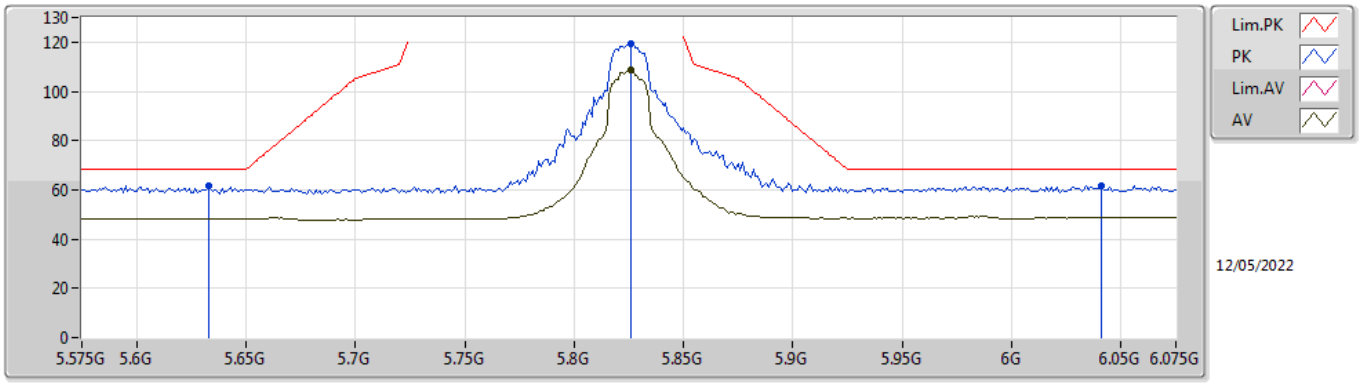


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.633G	61.88	68.20	-6.32	55.37	3	Vertical	323	1.84	-	34.53	7.40	35.42
PK	5.826G	119.34	Inf	-Inf	113.17	3	Vertical	323	1.84	-	34.25	7.43	35.51
AV	5.826G	108.70	Inf	-Inf	102.53	3	Vertical	323	1.84	-	34.25	7.43	35.51
PK	6.041G	61.51	68.20	-6.69	54.59	3	Vertical	323	1.84	-	34.88	7.62	35.58

802.11a_Nss1,(6Mbps)_2TX

5825MHz_TnomVnom

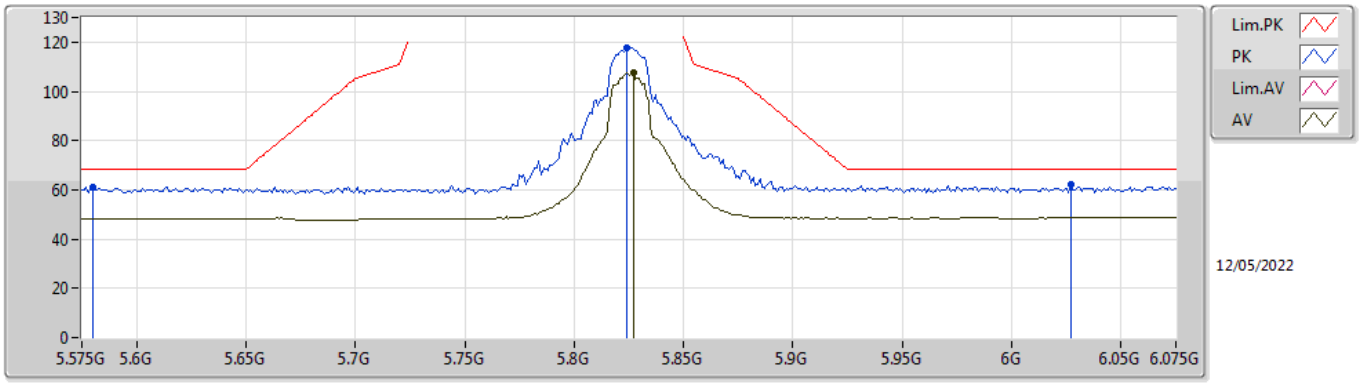


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.58G	61.31	68.20	-6.89	54.72	3	Horizontal	197	2.09	-	34.60	7.38	35.39
PK	5.824G	117.78	Inf	-Inf	111.62	3	Horizontal	197	2.09	-	34.25	7.42	35.51
AV	5.827G	107.35	Inf	-Inf	101.18	3	Horizontal	197	2.09	-	34.25	7.43	35.51
PK	6.027G	62.14	68.20	-6.06	55.27	3	Horizontal	197	2.09	-	34.85	7.61	35.59

802.11a_Nss1,(6Mbps)_2TX

5825MHz_TnomVnom

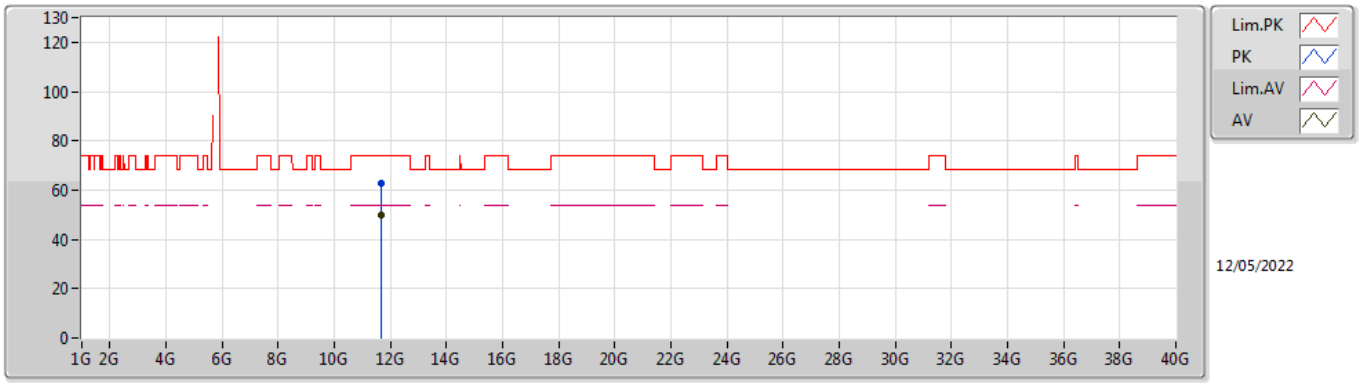


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6498G	62.53	74.00	-11.47	47.95	3	Vertical	214	2.65	-	39.40	10.75	35.57
AV	11.651G	49.65	54.00	-4.35	35.07	3	Vertical	214	2.65	-	39.40	10.75	35.57

802.11a_Nss1,(6Mbps)_2TX

5825MHz_TnomVnom

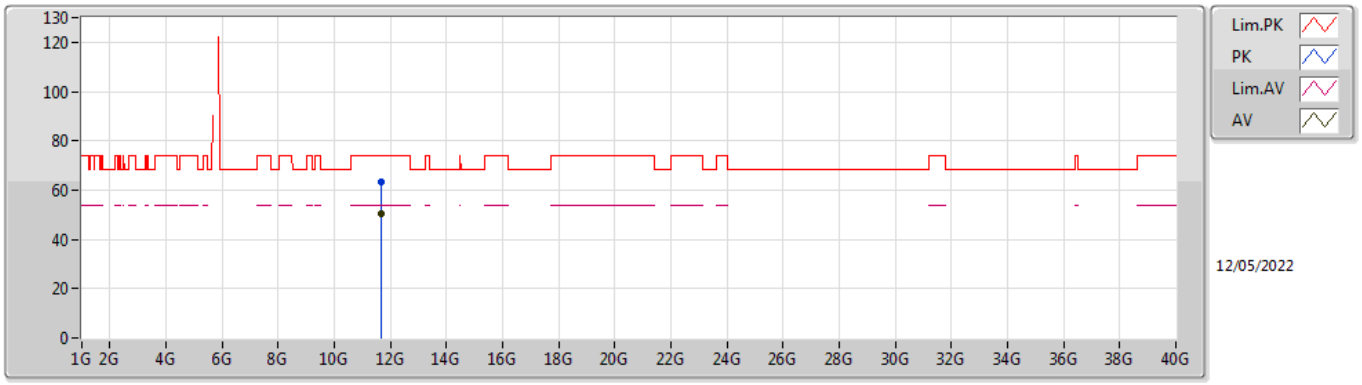


EUT X_2TX
Setting 21.5
03-D-K-3

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.64976G	63.53	74.00	-10.47	48.95	3	Horizontal	146	2.02	-	39.40	10.75	35.57
AV	11.65084G	50.23	54.00	-3.77	35.65	3	Horizontal	146	2.02	-	39.40	10.75	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

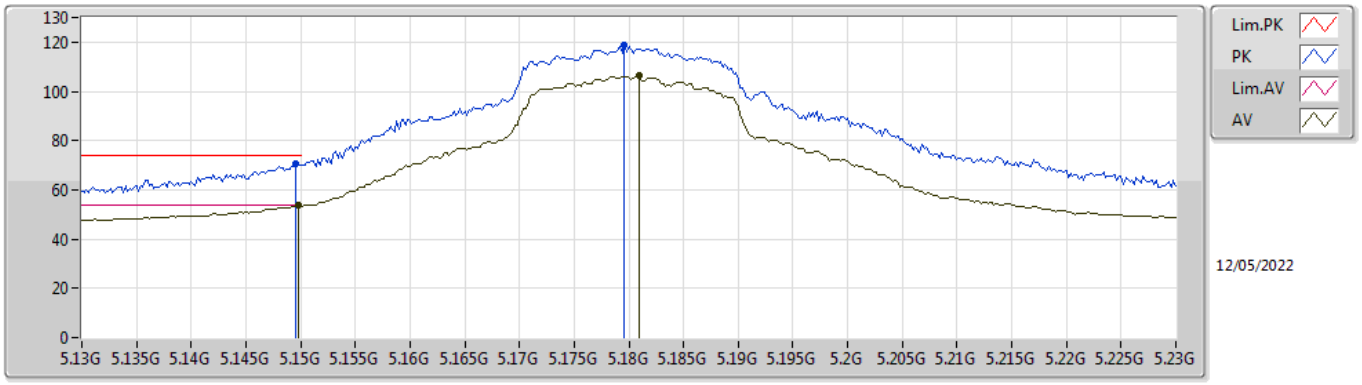


EUT X_2TX
Setting 20.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1496G	70.65	74.00	-3.35	64.82	3	Vertical	58	2.02	-	34.00	7.17	35.34
AV	5.1498G	53.76	54.00	-0.24	47.93	3	Vertical	58	2.02	-	34.00	7.17	35.34
PK	5.1796G	119.05	Inf	-Inf	113.08	3	Vertical	58	2.02	-	34.12	7.19	35.34
AV	5.181G	106.24	Inf	-Inf	100.27	3	Vertical	58	2.02	-	34.12	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

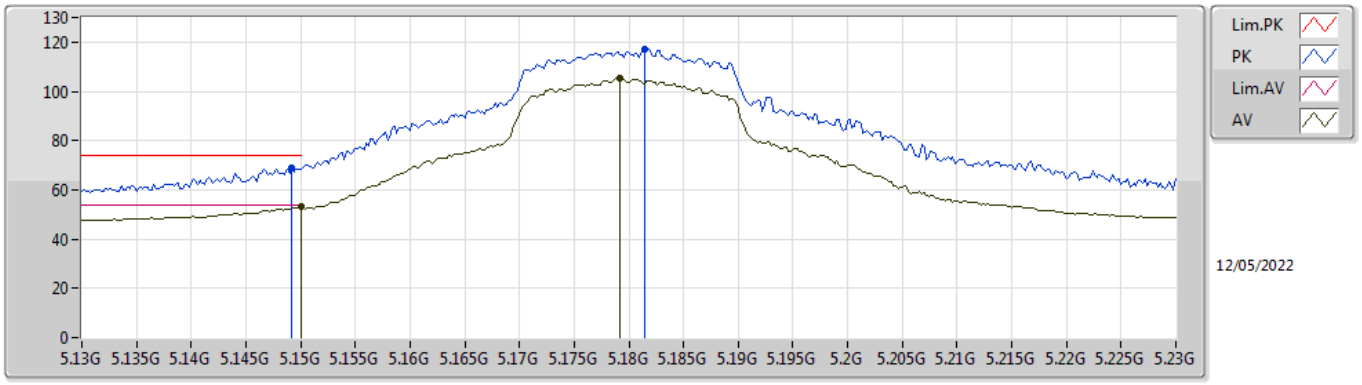


EUT X_2TX
Setting 20.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1492G	68.83	74.00	-5.17	63.00	3	Horizontal	198	2.05	-	34.00	7.17	35.34
AV	5.15G	53.01	54.00	-0.99	47.18	3	Horizontal	198	2.05	-	34.00	7.17	35.34
PK	5.1814G	117.16	Inf	-Inf	111.18	3	Horizontal	198	2.05	-	34.13	7.19	35.34
AV	5.1792G	105.44	Inf	-Inf	99.47	3	Horizontal	198	2.05	-	34.12	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

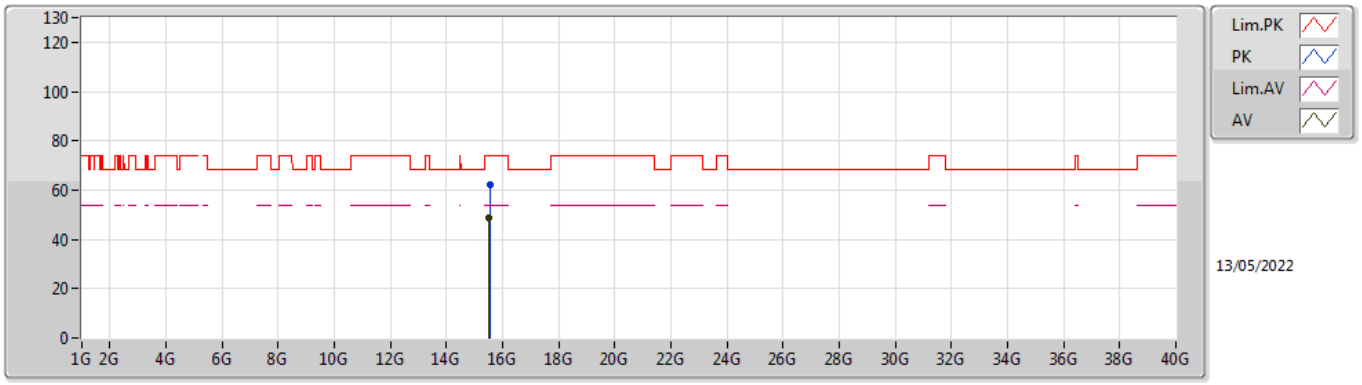


EUT X_2TX
Setting 20.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.54414G	62.33	74.00	-11.67	46.18	3	Vertical	312	1.40	-	38.39	13.17	35.41
AV	15.52566G	48.61	54.00	-5.39	32.32	3	Vertical	312	1.40	-	38.52	13.16	35.39

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

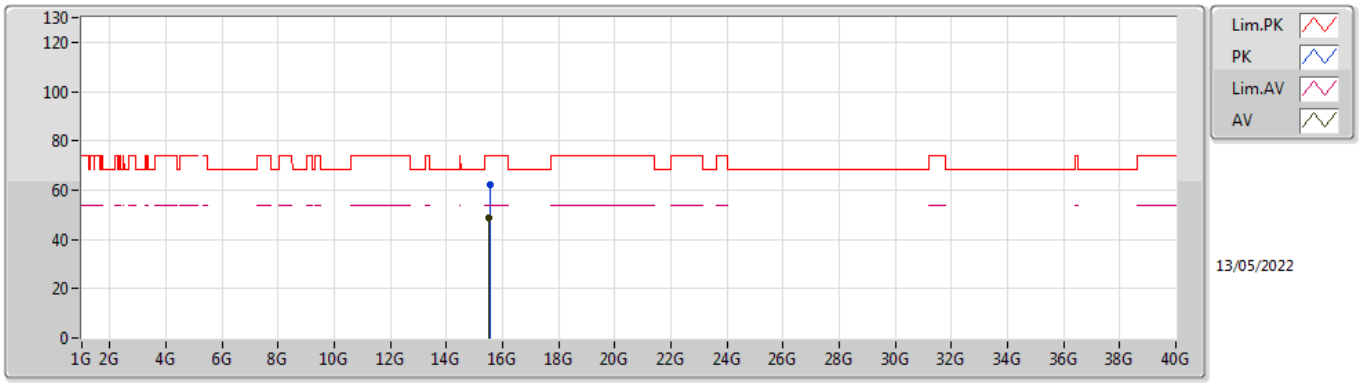


EUT X_2TX
Setting 20.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.53934G	62.32	74.00	-11.68	46.13	3	Horizontal	314	1.15	-	38.42	13.17	35.40
AV	15.5262G	48.58	54.00	-5.42	32.29	3	Horizontal	314	1.15	-	38.52	13.16	35.39

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

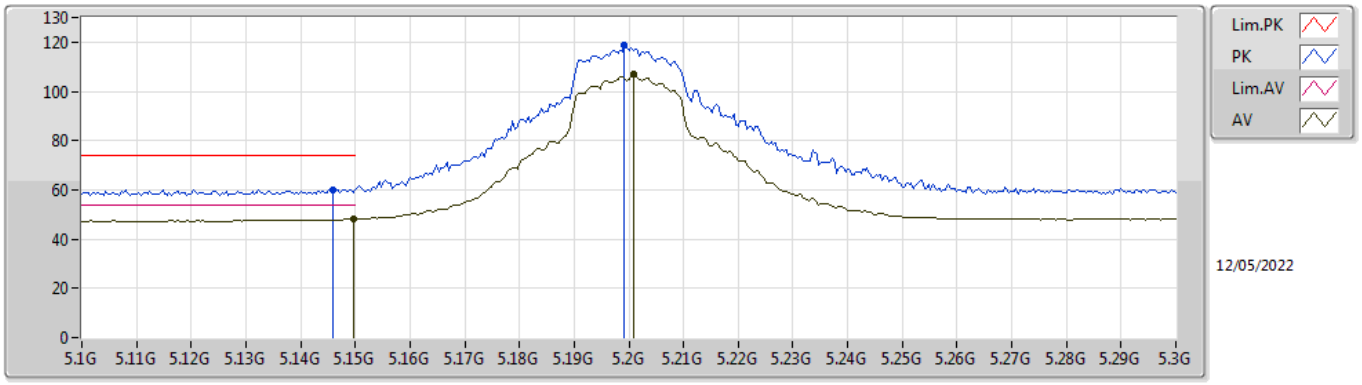


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.146G	60.07	74.00	-13.93	54.25	3	Vertical	60	1.98	-	33.99	7.17	35.34
AV	5.1496G	48.01	54.00	-5.99	42.18	3	Vertical	60	1.98	-	34.00	7.17	35.34
PK	5.1992G	118.77	Inf	-Inf	112.71	3	Vertical	60	1.98	-	34.20	7.20	35.34
AV	5.2008G	106.78	Inf	-Inf	100.72	3	Vertical	60	1.98	-	34.20	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

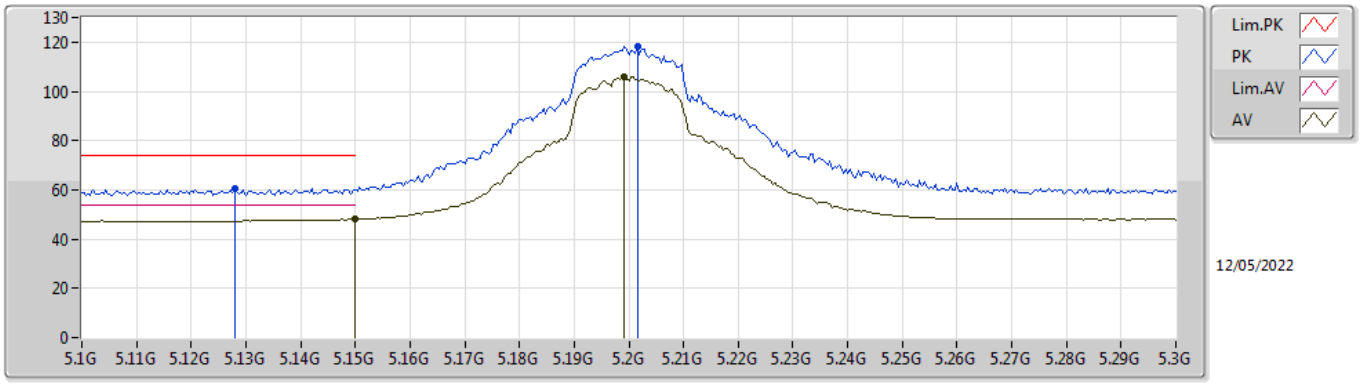


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.128G	60.62	74.00	-13.38	54.84	3	Horizontal	198	2.24	-	33.96	7.16	35.34
AV	5.15G	48.06	54.00	-5.94	42.23	3	Horizontal	198	2.24	-	34.00	7.17	35.34
PK	5.2016G	118.30	Inf	-Inf	112.23	3	Horizontal	198	2.24	-	34.21	7.20	35.34
AV	5.1992G	106.08	Inf	-Inf	100.02	3	Horizontal	198	2.24	-	34.20	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

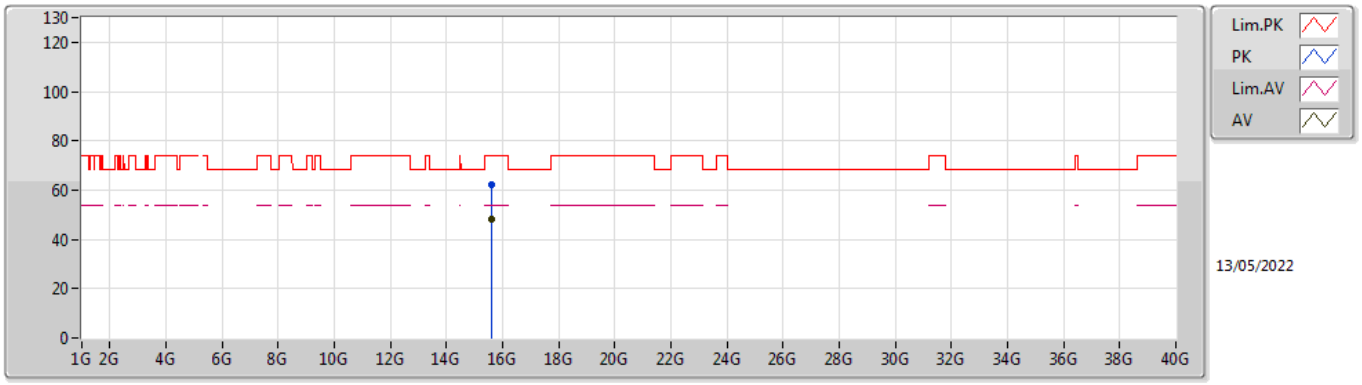


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.60246G	62.00	74.00	-12.00	46.27	3	Vertical	248	1.87	-	37.99	13.20	35.46
AV	15.58506G	48.46	54.00	-5.54	32.61	3	Vertical	248	1.87	-	38.10	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

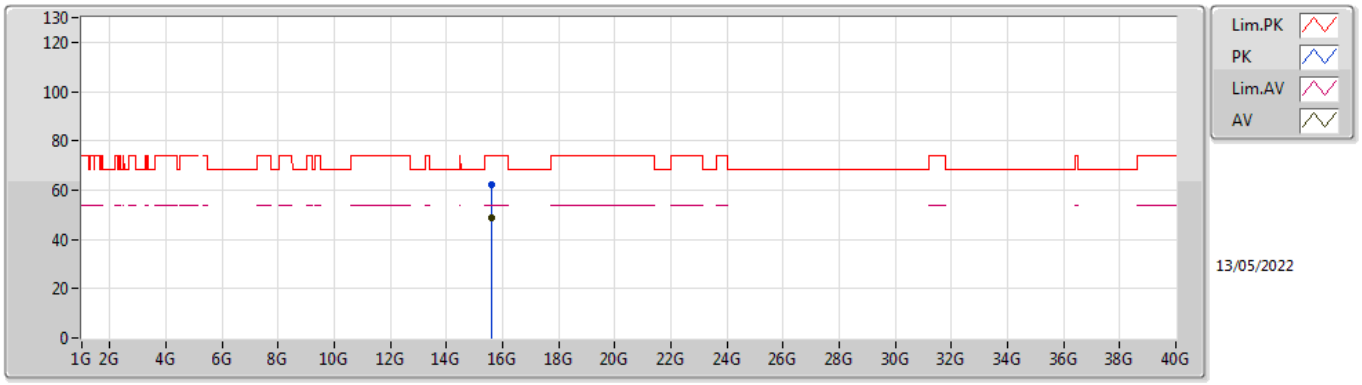


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.60354G	61.96	74.00	-12.04	46.24	3	Horizontal	164	1.22	-	37.98	13.20	35.46
AV	15.58554G	48.51	54.00	-5.49	32.66	3	Horizontal	164	1.22	-	38.10	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

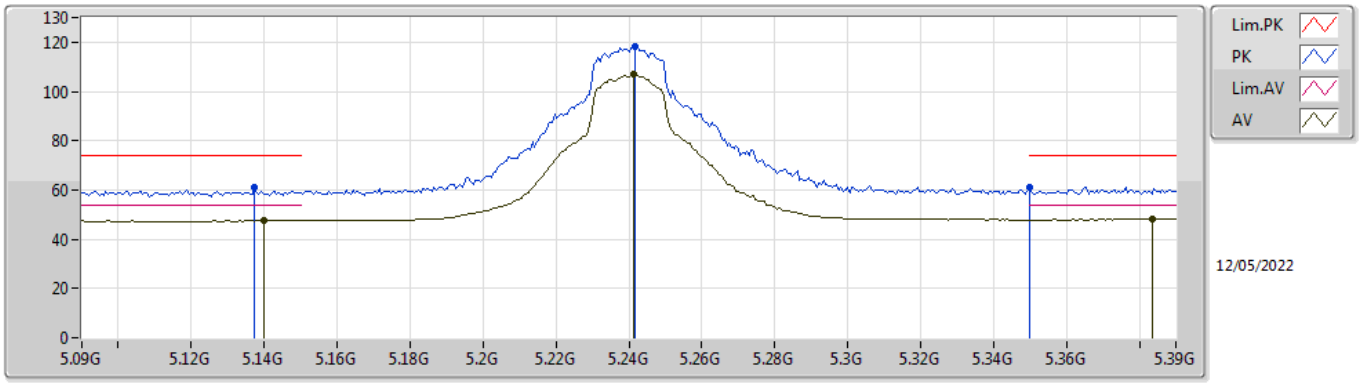


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1374G	61.02	74.00	-12.98	55.22	3	Vertical	211	2.16	-	33.97	7.17	35.34
AV	5.1398G	47.51	54.00	-6.49	41.70	3	Vertical	211	2.16	-	33.98	7.17	35.34
PK	5.2418G	118.30	Inf	-Inf	112.07	3	Vertical	211	2.16	-	34.37	7.20	35.34
AV	5.2412G	106.99	Inf	-Inf	100.77	3	Vertical	211	2.16	-	34.36	7.20	35.34
PK	5.35G	61.01	74.00	-12.99	54.65	3	Vertical	211	2.16	-	34.50	7.20	35.34
AV	5.3834G	48.09	54.00	-5.91	41.67	3	Vertical	211	2.16	-	34.57	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

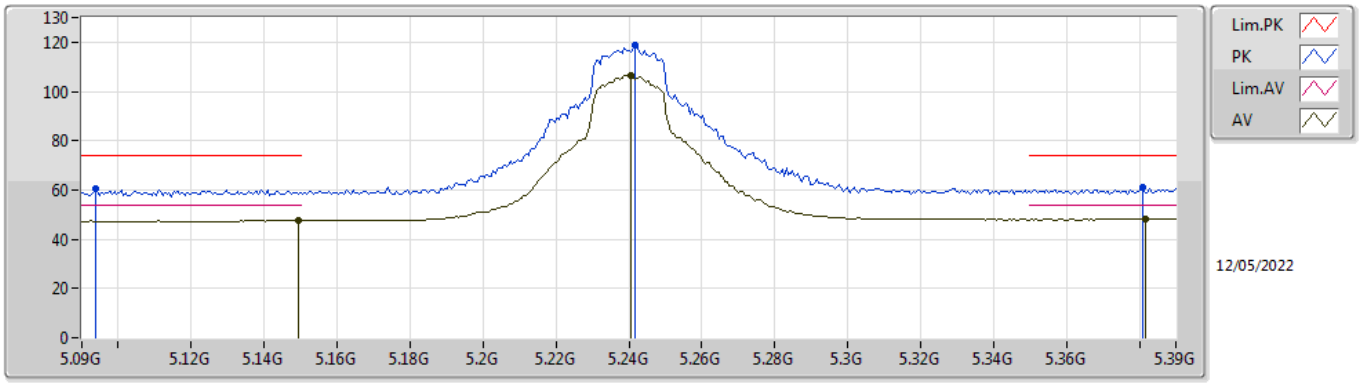


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.0936G	60.26	74.00	-13.74	54.55	3	Horizontal	198	2.20	-	33.89	7.15	35.33
AV	5.1494G	47.55	54.00	-6.45	41.72	3	Horizontal	198	2.20	-	34.00	7.17	35.34
PK	5.2418G	118.86	Inf	-Inf	112.63	3	Horizontal	198	2.20	-	34.37	7.20	35.34
AV	5.2406G	106.36	Inf	-Inf	100.14	3	Horizontal	198	2.20	-	34.36	7.20	35.34
PK	5.381G	60.95	74.00	-13.05	54.54	3	Horizontal	198	2.20	-	34.56	7.20	35.35
AV	5.3816G	48.14	54.00	-5.86	41.73	3	Horizontal	198	2.20	-	34.56	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

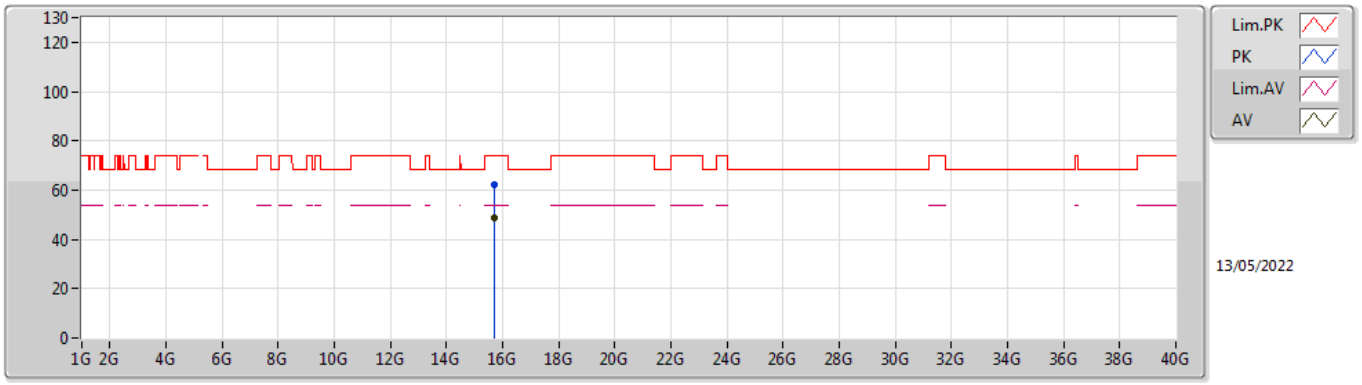


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.71964G	62.21	74.00	-11.79	46.92	3	Vertical	171	2.55	-	37.58	13.26	35.55
AV	15.71322G	48.47	54.00	-5.53	33.21	3	Vertical	171	2.55	-	37.55	13.26	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

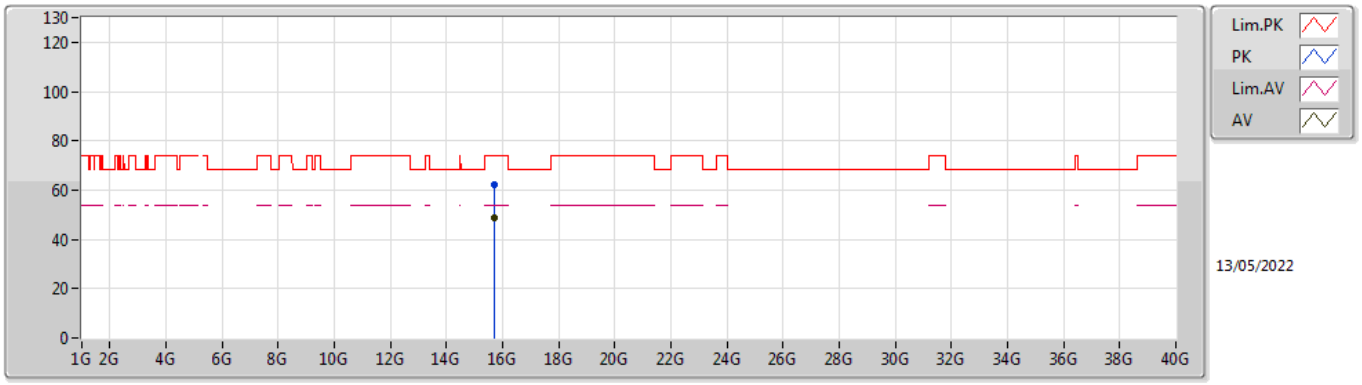


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.71352G	62.13	74.00	-11.87	46.87	3	Horizontal	264	2.41	-	37.55	13.26	35.55
AV	15.7248G	48.49	54.00	-5.51	33.19	3	Horizontal	264	2.41	-	37.60	13.26	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

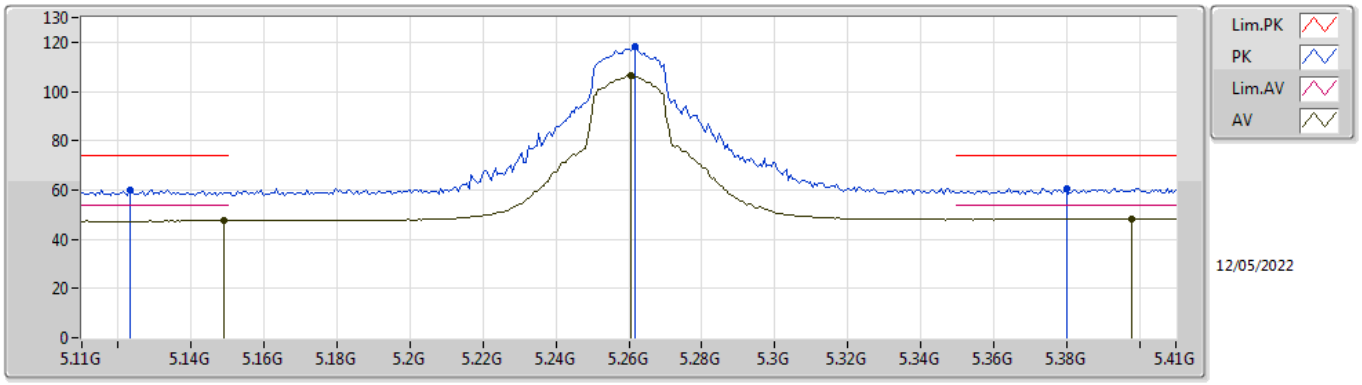


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1232G	60.07	74.00	-13.93	54.29	3	Vertical	223	2.04	-	33.95	7.16	35.33
AV	5.149G	47.49	54.00	-6.51	41.66	3	Vertical	223	2.04	-	34.00	7.17	35.34
PK	5.2618G	118.01	Inf	-Inf	111.73	3	Vertical	223	2.04	-	34.42	7.20	35.34
AV	5.2606G	106.31	Inf	-Inf	100.03	3	Vertical	223	2.04	-	34.42	7.20	35.34
PK	5.38G	60.74	74.00	-13.26	54.33	3	Vertical	223	2.04	-	34.56	7.20	35.35
AV	5.398G	48.24	54.00	-5.76	41.79	3	Vertical	223	2.04	-	34.60	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

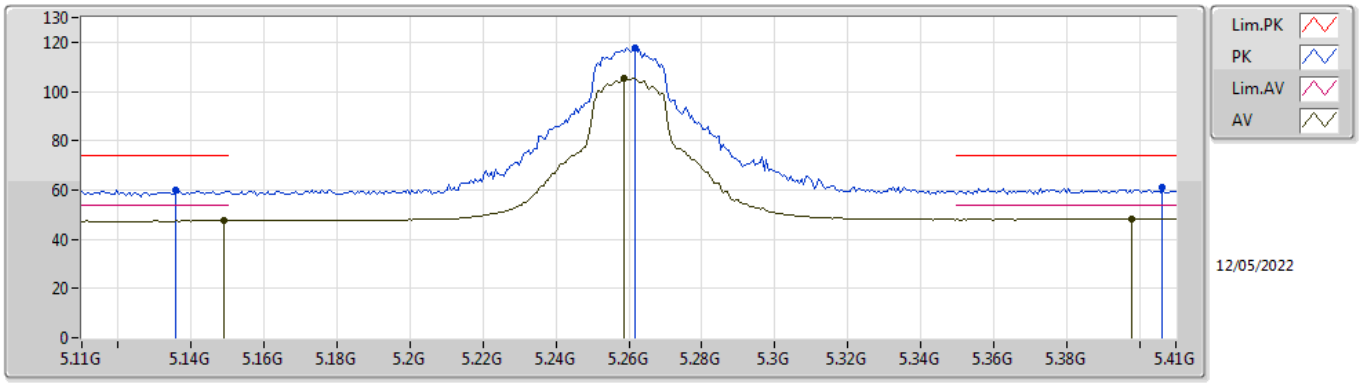


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1358G	60.17	74.00	-13.83	54.37	3	Horizontal	198	2.11	-	33.97	7.17	35.34
AV	5.149G	47.52	54.00	-6.48	41.69	3	Horizontal	198	2.11	-	34.00	7.17	35.34
PK	5.2618G	117.92	Inf	-Inf	111.64	3	Horizontal	198	2.11	-	34.42	7.20	35.34
AV	5.2588G	105.42	Inf	-Inf	99.14	3	Horizontal	198	2.11	-	34.42	7.20	35.34
PK	5.4064G	61.09	74.00	-12.91	54.64	3	Horizontal	198	2.11	-	34.59	7.21	35.35
AV	5.398G	48.26	54.00	-5.74	41.81	3	Horizontal	198	2.11	-	34.60	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

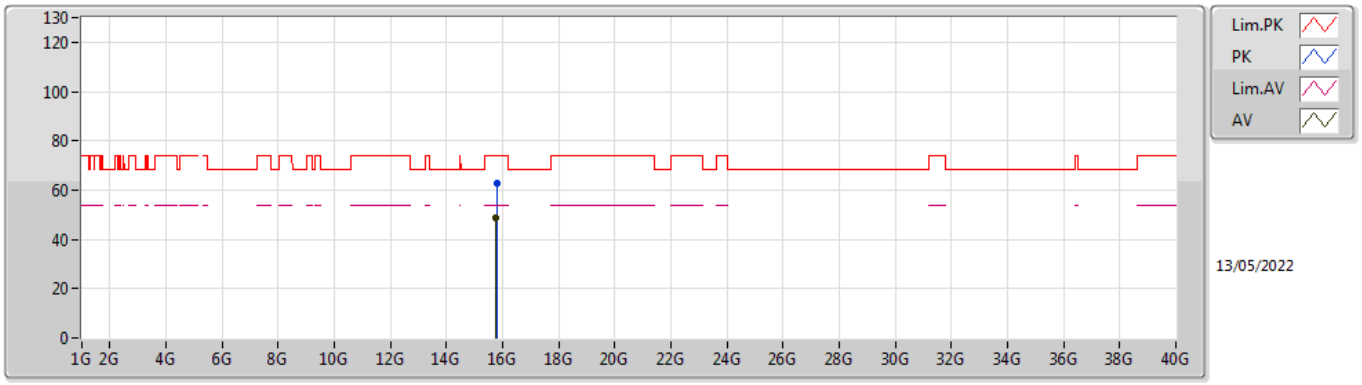


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.78906G	62.49	74.00	-11.51	46.95	3	Vertical	338	2.22	-	37.86	13.29	35.61
AV	15.77784G	48.84	54.00	-5.16	33.34	3	Vertical	338	2.22	-	37.81	13.29	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

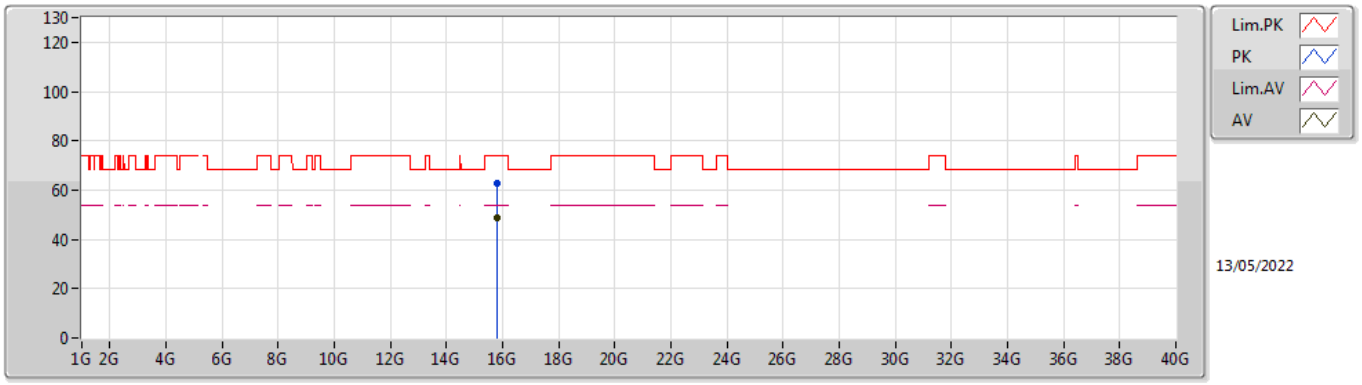


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.78036G	62.92	74.00	-11.08	47.42	3	Horizontal	213	1.93	-	37.82	13.29	35.61
AV	15.79098G	48.86	54.00	-5.14	33.31	3	Horizontal	213	1.93	-	37.86	13.30	35.61

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

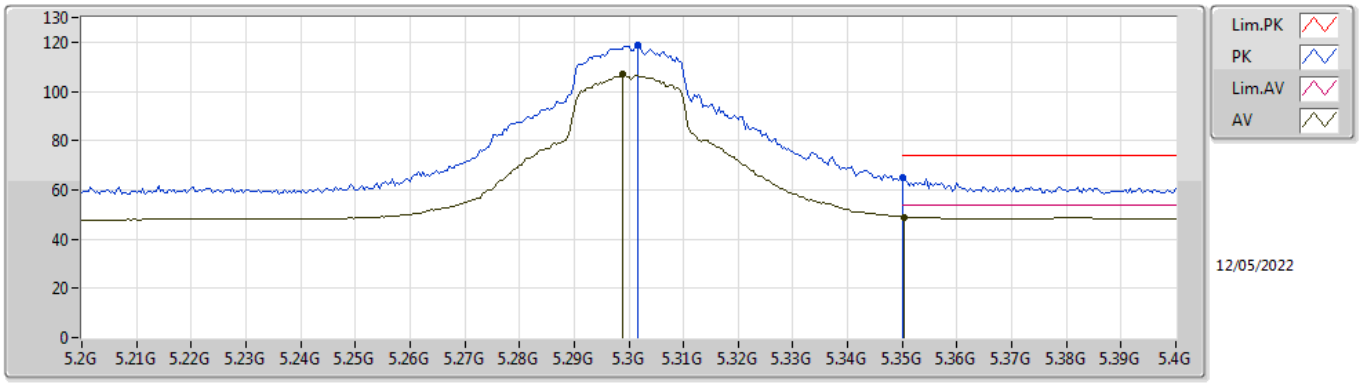


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3016G	119.03	Inf	-Inf	112.67	3	Vertical	212	2.02	-	34.50	7.20	35.34
AV	5.2988G	106.77	Inf	-Inf	100.41	3	Vertical	212	2.02	-	34.50	7.20	35.34
PK	5.35G	65.13	74.00	-8.87	58.77	3	Vertical	212	2.02	-	34.50	7.20	35.34
AV	5.3504G	48.96	54.00	-5.04	42.60	3	Vertical	212	2.02	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

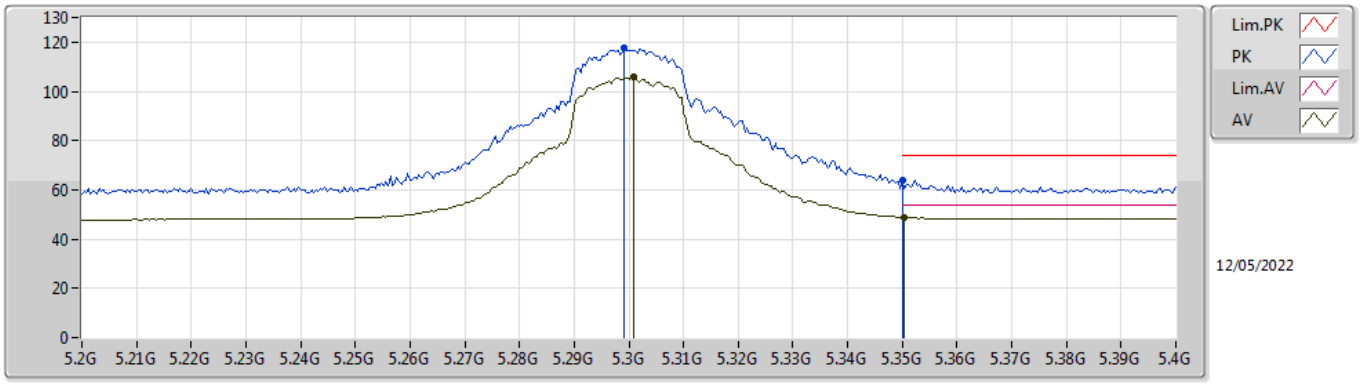


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2992G	117.47	Inf	-Inf	111.11	3	Horizontal	197	1.97	-	34.50	7.20	35.34
AV	5.3008G	105.97	Inf	-Inf	99.61	3	Horizontal	197	1.97	-	34.50	7.20	35.34
PK	5.35G	63.81	74.00	-10.19	57.45	3	Horizontal	197	1.97	-	34.50	7.20	35.34
AV	5.3504G	48.72	54.00	-5.28	42.36	3	Horizontal	197	1.97	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

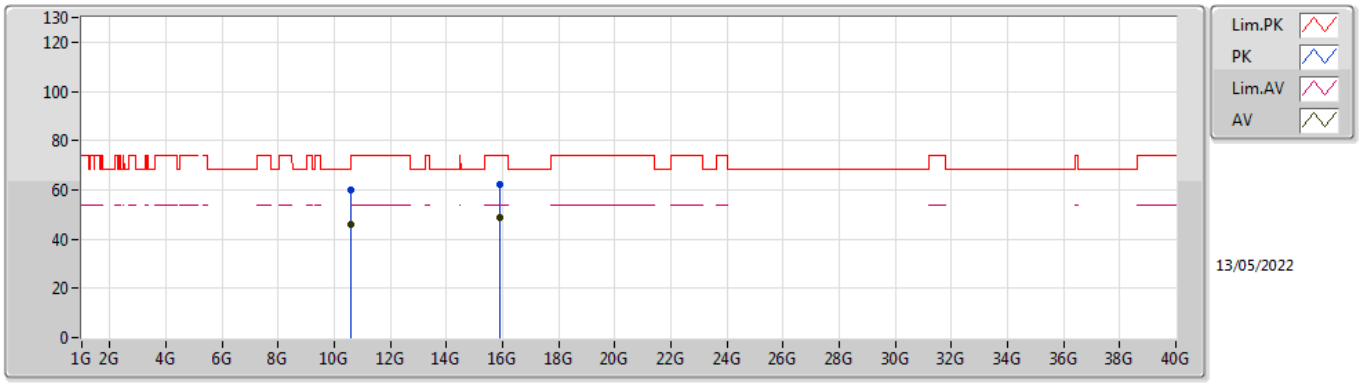


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60366G	59.71	74.00	-14.29	46.29	3	Vertical	219	1.90	-	38.21	10.59	35.38
AV	10.60102G	45.87	54.00	-8.13	32.46	3	Vertical	219	1.90	-	38.20	10.59	35.38
PK	15.88968G	62.18	74.00	-11.82	46.91	3	Vertical	83	2.92	-	37.63	13.34	35.70
AV	15.89844G	48.62	54.00	-5.38	33.37	3	Vertical	83	2.92	-	37.60	13.35	35.70

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

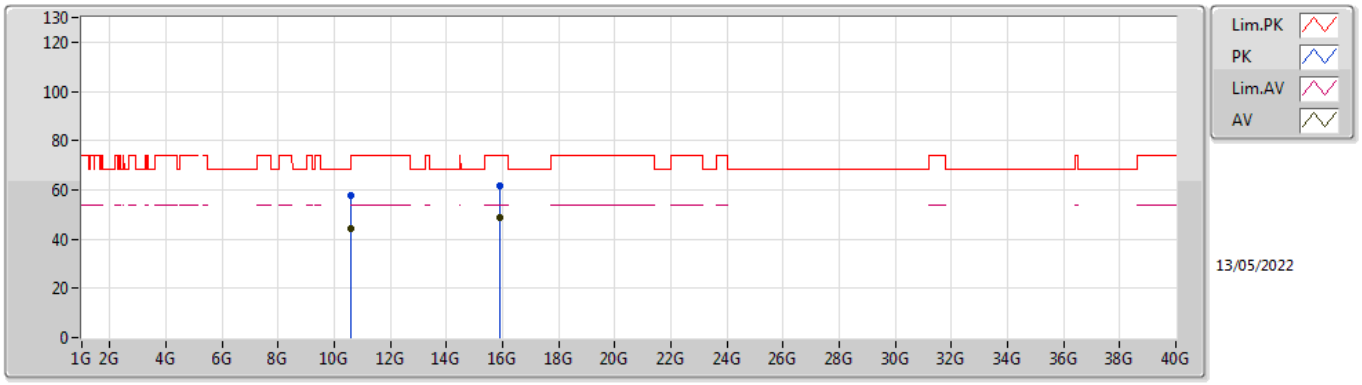


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60126G	57.86	74.00	-16.14	44.45	3	Horizontal	319	2.78	-	38.20	10.59	35.38
AV	10.60126G	44.53	54.00	-9.47	31.12	3	Horizontal	319	2.78	-	38.20	10.59	35.38
PK	15.91086G	61.80	74.00	-12.20	46.58	3	Horizontal	118	2.35	-	37.58	13.36	35.72
AV	15.89724G	48.47	54.00	-5.53	33.21	3	Horizontal	118	2.35	-	37.61	13.35	35.70

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

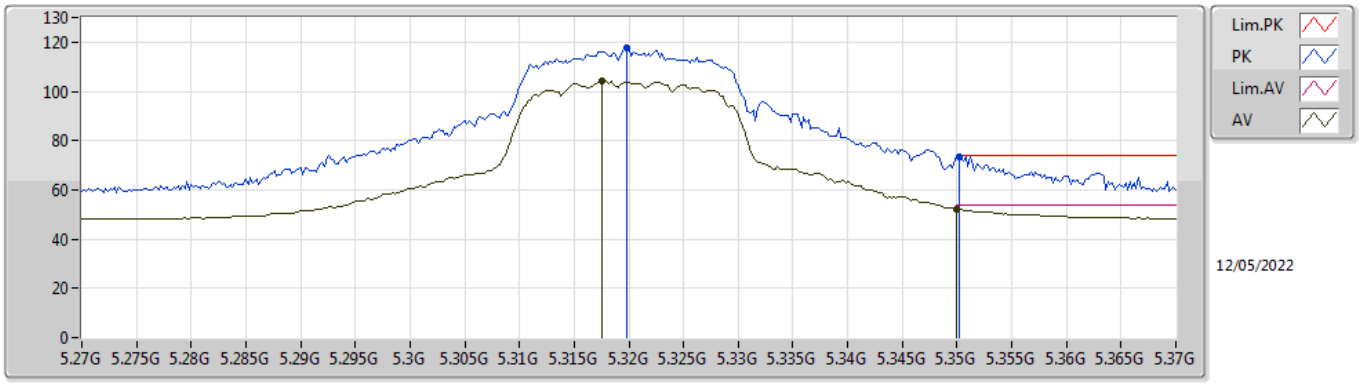


EUT X_2TX
Setting 17.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3198G	117.45	Inf	-Inf	111.09	3	Vertical	328	1.90	-	34.50	7.20	35.34
AV	5.3176G	104.14	Inf	-Inf	97.78	3	Vertical	328	1.90	-	34.50	7.20	35.34
PK	5.3502G	73.49	74.00	-0.51	67.13	3	Vertical	328	1.90	-	34.50	7.20	35.34
AV	5.35G	52.04	54.00	-1.96	45.68	3	Vertical	328	1.90	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

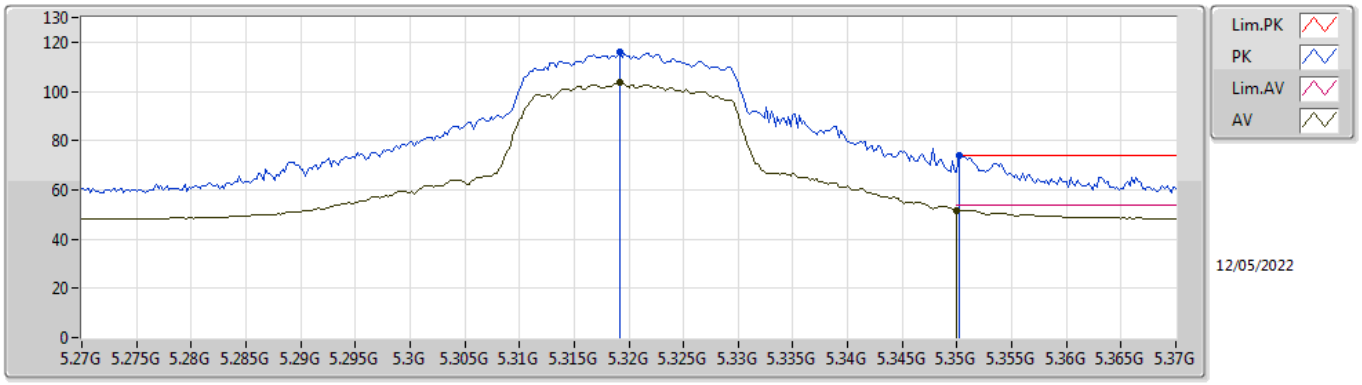


EUT X_2TX
Setting 17.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3192G	115.85	Inf	-Inf	109.49	3	Horizontal	197	2.08	-	34.50	7.20	35.34
AV	5.3192G	103.62	Inf	-Inf	97.26	3	Horizontal	197	2.08	-	34.50	7.20	35.34
PK	5.3502G	73.86	74.00	-0.14	67.50	3	Horizontal	197	2.08	-	34.50	7.20	35.34
AV	5.35G	51.59	54.00	-2.41	45.23	3	Horizontal	197	2.08	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

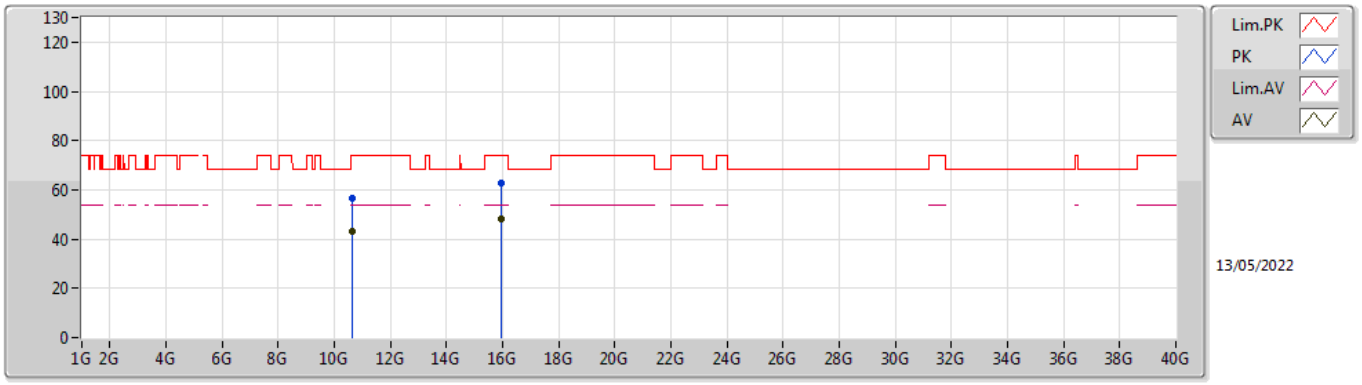


EUT X_2TX
Setting 17.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.64282G	56.74	74.00	-17.26	43.20	3	Vertical	261	1.55	-	38.29	10.60	35.35
AV	10.6355G	43.18	54.00	-10.82	29.66	3	Vertical	261	1.55	-	38.27	10.60	35.35
PK	15.96654G	62.51	74.00	-11.49	47.42	3	Vertical	123	2.13	-	37.47	13.38	35.76
AV	15.95664G	48.05	54.00	-5.95	32.93	3	Vertical	123	2.13	-	37.49	13.38	35.75

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

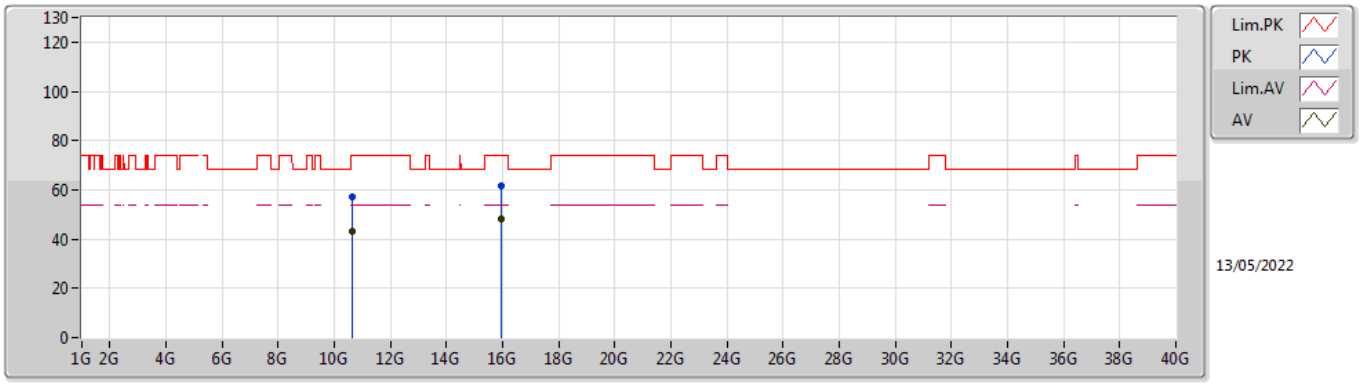


EUT X_2TX
Setting 17.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.62764G	57.22	74.00	-16.78	43.73	3	Horizontal	204	2.06	-	38.26	10.59	35.36
AV	10.64702G	43.15	54.00	-10.85	29.60	3	Horizontal	204	2.06	-	38.29	10.60	35.34
PK	15.96438G	61.39	74.00	-12.61	46.30	3	Horizontal	265	2.05	-	37.47	13.38	35.76
AV	15.95706G	48.07	54.00	-5.93	32.95	3	Horizontal	265	2.05	-	37.49	13.38	35.75

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

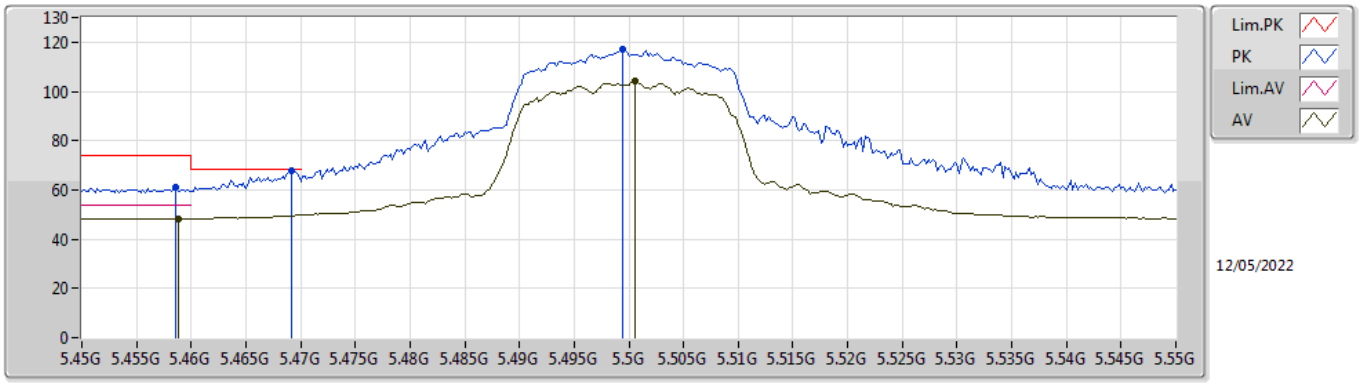


EUT X_2TX
Setting 16.75
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4586G	60.89	74.00	-13.11	54.46	3	Vertical	214	1.89	-	34.52	7.26	35.35
AV	5.4588G	48.26	54.00	-5.74	41.83	3	Vertical	214	1.89	-	34.52	7.26	35.35
PK	5.4692G	67.94	68.20	-0.26	61.48	3	Vertical	214	1.89	-	34.54	7.27	35.35
PK	5.4994G	117.12	Inf	-Inf	110.57	3	Vertical	214	1.89	-	34.60	7.30	35.35
AV	5.5006G	104.10	Inf	-Inf	97.55	3	Vertical	214	1.89	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

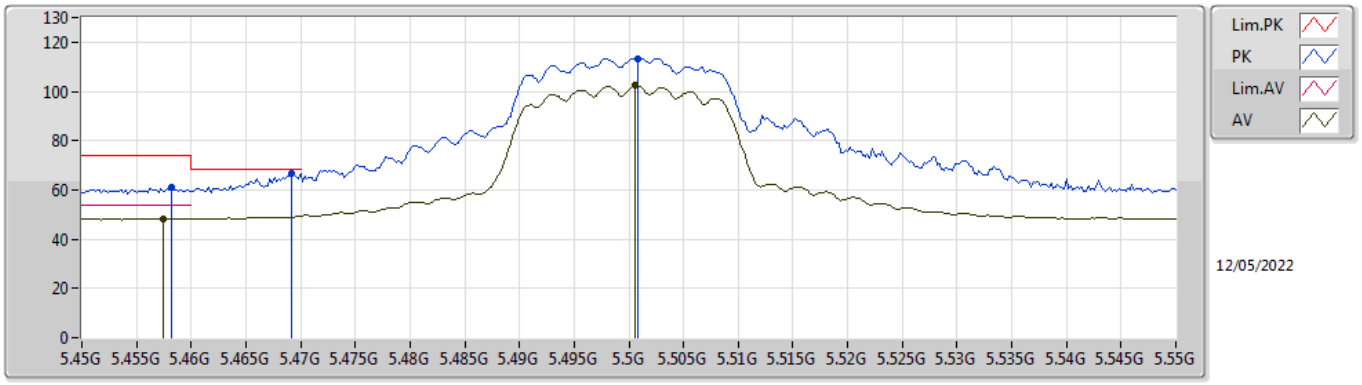


EUT X_2TX
Setting 16.75
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4582G	61.17	74.00	-12.83	54.74	3	Horizontal	177	1.88	-	34.52	7.26	35.35
AV	5.4574G	48.18	54.00	-5.82	41.76	3	Horizontal	177	1.88	-	34.51	7.26	35.35
PK	5.4692G	66.88	68.20	-1.32	60.42	3	Horizontal	177	1.88	-	34.54	7.27	35.35
PK	5.5008G	113.41	Inf	-Inf	106.86	3	Horizontal	177	1.88	-	34.60	7.30	35.35
AV	5.5006G	102.46	Inf	-Inf	95.91	3	Horizontal	177	1.88	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

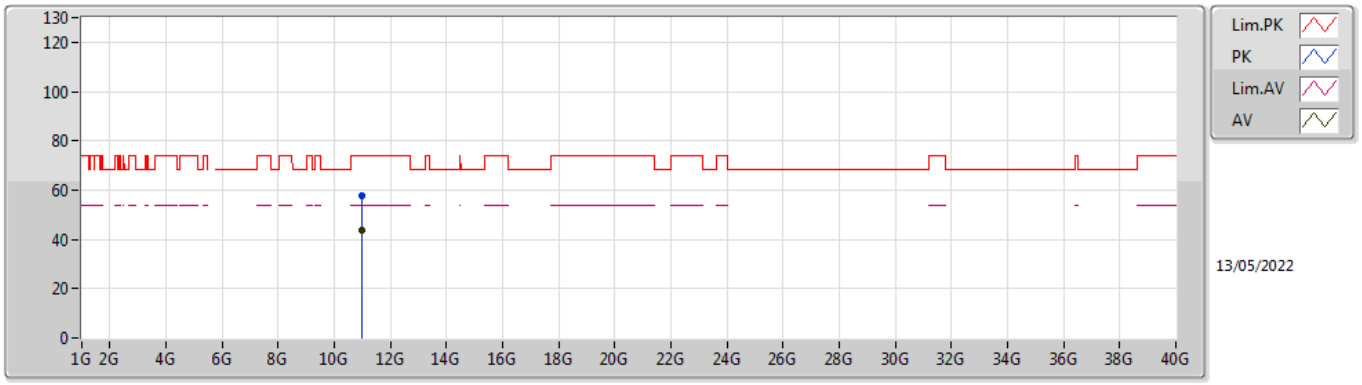


EUT X_2TX
Setting 16.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.99958G	57.62	74.00	-16.38	43.61	3	Vertical	319	1.32	-	38.40	10.65	35.04
AV	10.99622G	43.90	54.00	-10.10	29.89	3	Vertical	319	1.32	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

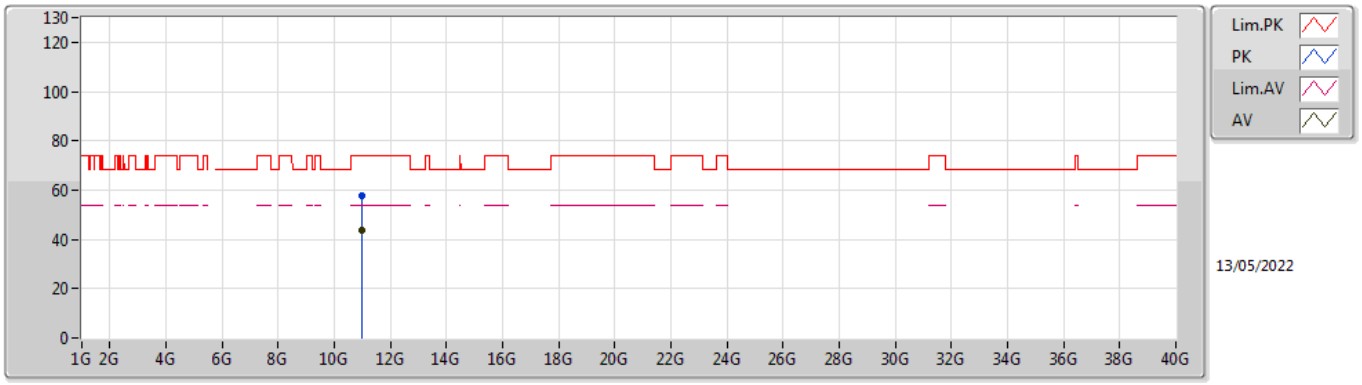


EUT X_2TX
Setting 16.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0015G	57.77	74.00	-16.23	43.76	3	Horizontal	136	1.72	-	38.40	10.65	35.04
AV	10.9922G	43.89	54.00	-10.11	29.90	3	Horizontal	136	1.72	-	38.39	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

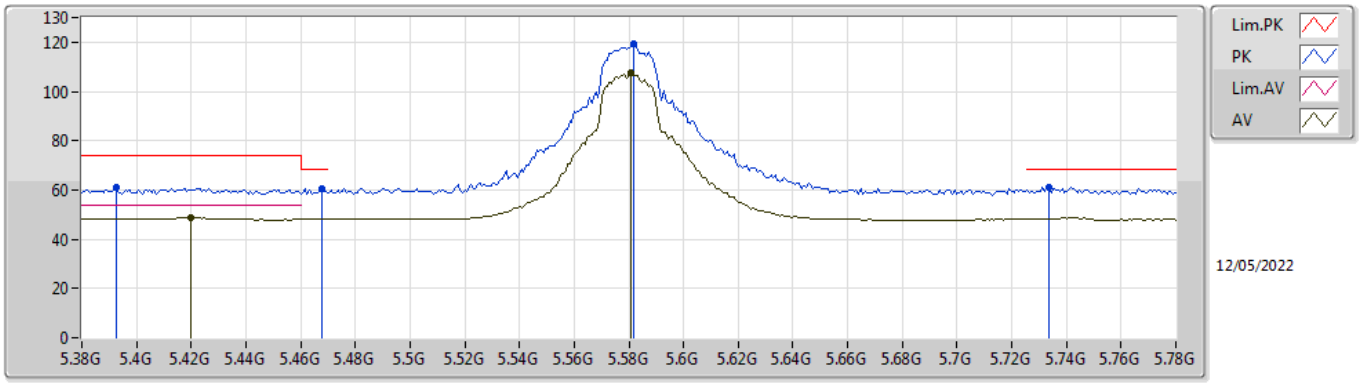


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3928G	60.88	74.00	-13.12	54.44	3	Vertical	211	1.96	-	34.59	7.20	35.35
AV	5.42G	48.84	54.00	-5.16	42.41	3	Vertical	211	1.96	-	34.56	7.22	35.35
PK	5.468G	60.39	68.20	-7.81	53.93	3	Vertical	211	1.96	-	34.54	7.27	35.35
PK	5.5816G	119.51	Inf	-Inf	112.92	3	Vertical	211	1.96	-	34.60	7.38	35.39
AV	5.5808G	107.38	Inf	-Inf	100.79	3	Vertical	211	1.96	-	34.60	7.38	35.39
PK	5.7336G	61.32	68.20	-6.88	55.16	3	Vertical	211	1.96	-	34.23	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

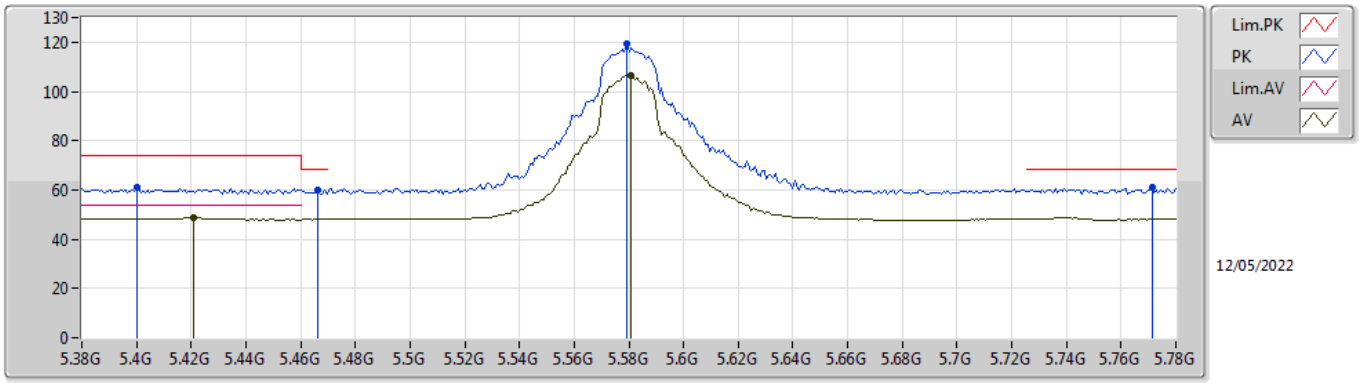


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4G	60.90	74.00	-13.10	54.45	3	Horizontal	360	2.00	-	34.60	7.20	35.35
AV	5.4208G	48.66	54.00	-5.34	42.23	3	Horizontal	360	2.00	-	34.56	7.22	35.35
PK	5.4664G	60.19	68.20	-8.01	53.74	3	Horizontal	360	2.00	-	34.53	7.27	35.35
PK	5.5792G	119.32	Inf	-Inf	112.73	3	Horizontal	360	2.00	-	34.60	7.38	35.39
AV	5.5808G	106.58	Inf	-Inf	99.99	3	Horizontal	360	2.00	-	34.60	7.38	35.39
PK	5.7712G	60.82	68.20	-7.38	54.71	3	Horizontal	360	2.00	-	34.20	7.40	35.49

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

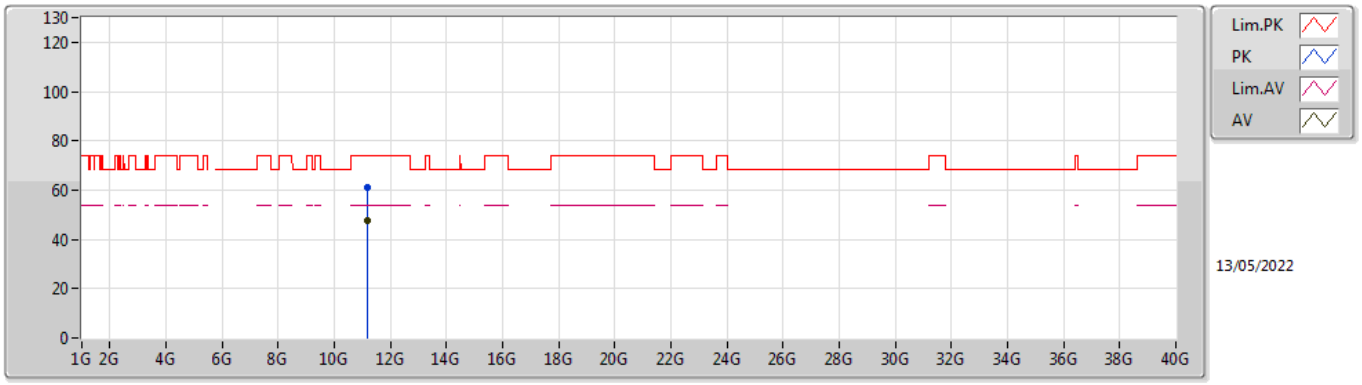


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1618G	61.15	74.00	-12.85	47.14	3	Vertical	224	1.83	-	38.56	10.67	35.22
AV	11.15922G	47.74	54.00	-6.26	33.73	3	Vertical	224	1.83	-	38.56	10.67	35.22

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

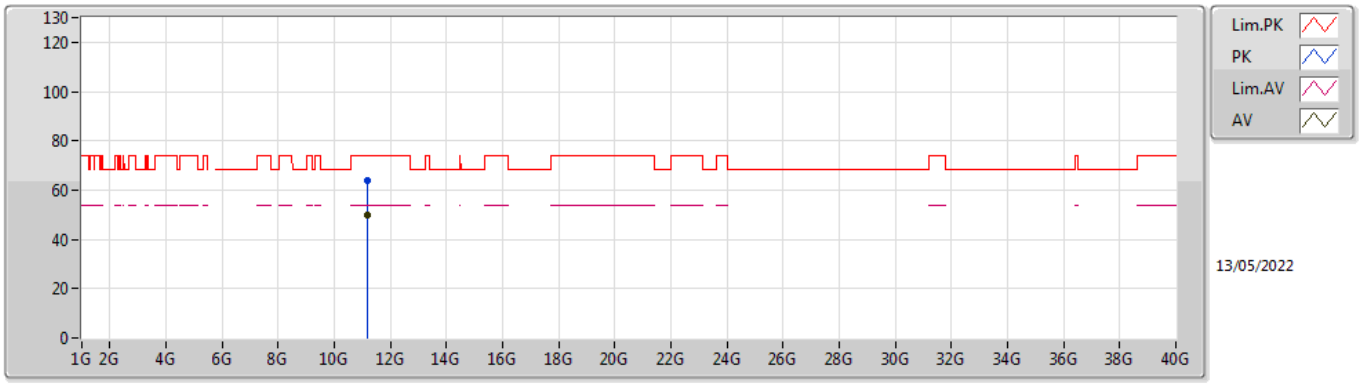


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.15904G	63.87	74.00	-10.13	49.86	3	Horizontal	229	2.10	-	38.56	10.67	35.22
AV	11.1591G	50.06	54.00	-3.94	36.05	3	Horizontal	229	2.10	-	38.56	10.67	35.22

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

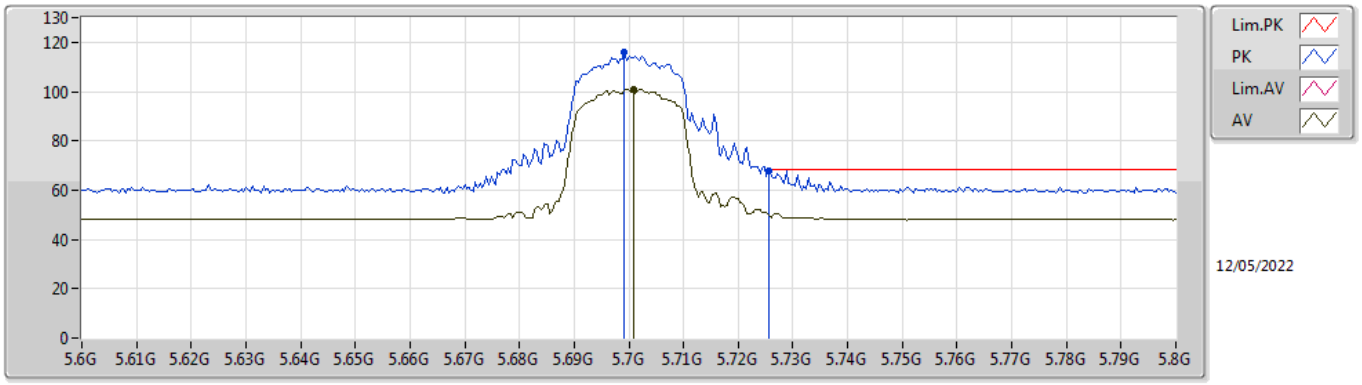


EUT X_2TX
Setting 13
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6992G	115.84	Inf	-Inf	109.59	3	Vertical	317	1.80	-	34.30	7.40	35.45
AV	5.7008G	100.97	Inf	-Inf	94.72	3	Vertical	317	1.80	-	34.30	7.40	35.45
PK	5.7256G	67.59	68.20	-0.61	61.40	3	Vertical	317	1.80	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

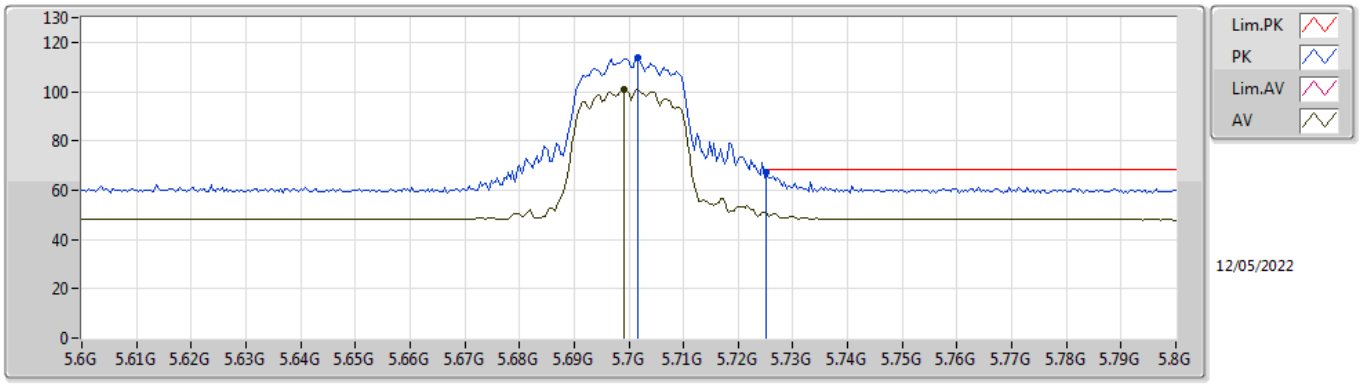


EUT X_2TX
Setting 13
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7016G	113.60	Inf	-Inf	107.35	3	Horizontal	3	2.06	-	34.30	7.40	35.45
AV	5.6992G	100.65	Inf	-Inf	94.40	3	Horizontal	3	2.06	-	34.30	7.40	35.45
PK	5.7252G	67.31	68.20	-0.89	61.12	3	Horizontal	3	2.06	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

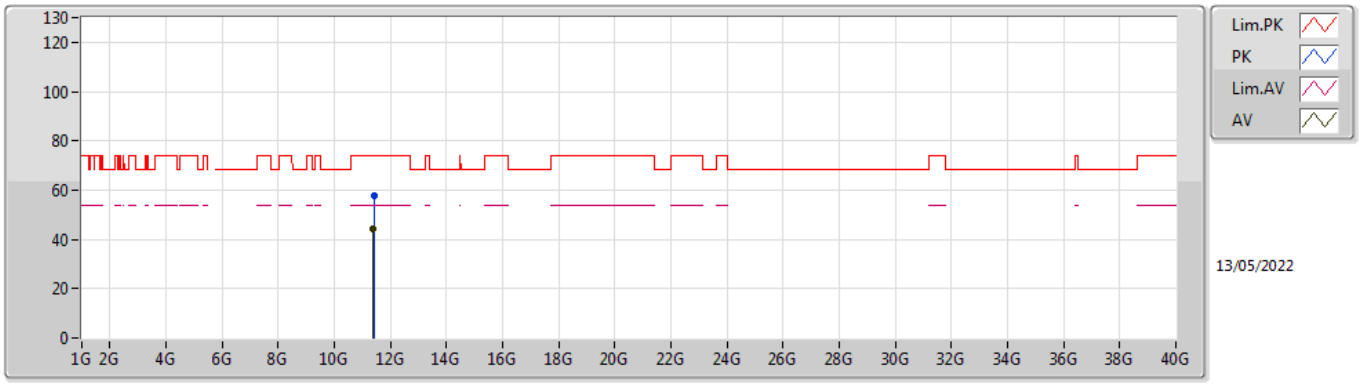


EUT X_2TX
Setting 13
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.40534G	57.82	74.00	-16.18	43.79	3	Vertical	27	1.05	-	38.81	10.71	35.49
AV	11.38566G	43.99	54.00	-10.01	29.96	3	Vertical	27	1.05	-	38.79	10.71	35.47

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

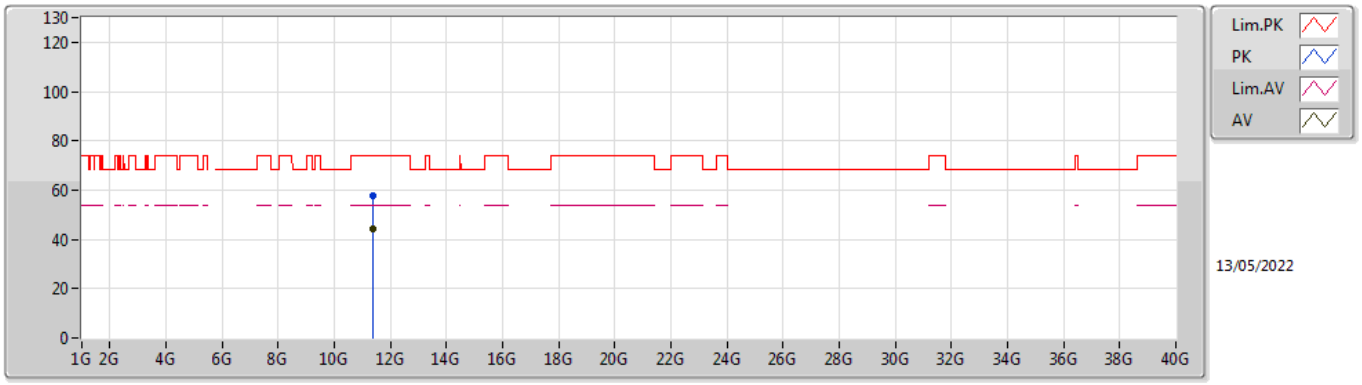


EUT X_2TX
Setting 13
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.39556G	57.68	74.00	-16.32	43.65	3	Horizontal	285	2.23	-	38.80	10.71	35.48
AV	11.3865G	44.03	54.00	-9.97	30.00	3	Horizontal	285	2.23	-	38.79	10.71	35.47

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

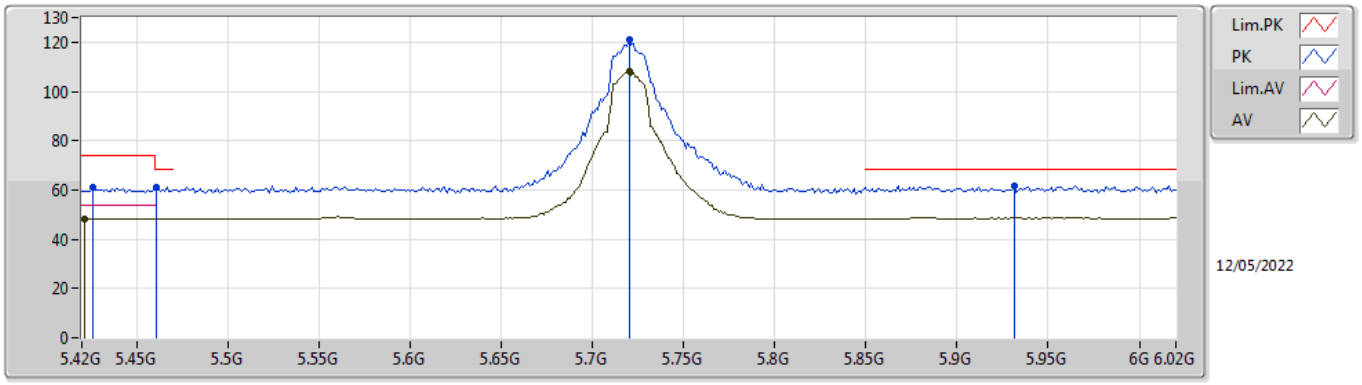


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.426G	60.83	74.00	-13.17	54.40	3	Vertical	318	1.80	-	34.55	7.23	35.35
AV	5.4212G	48.23	54.00	-5.77	41.80	3	Vertical	318	1.80	-	34.56	7.22	35.35
PK	5.4608G	60.95	68.20	-7.25	54.52	3	Vertical	318	1.80	-	34.52	7.26	35.35
PK	5.72G	120.86	Inf	-Inf	114.66	3	Vertical	318	1.80	-	34.26	7.40	35.46
AV	5.72G	107.97	Inf	-Inf	101.77	3	Vertical	318	1.80	-	34.26	7.40	35.46
PK	5.9312G	61.91	68.20	-6.29	55.23	3	Vertical	318	1.80	-	34.72	7.53	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

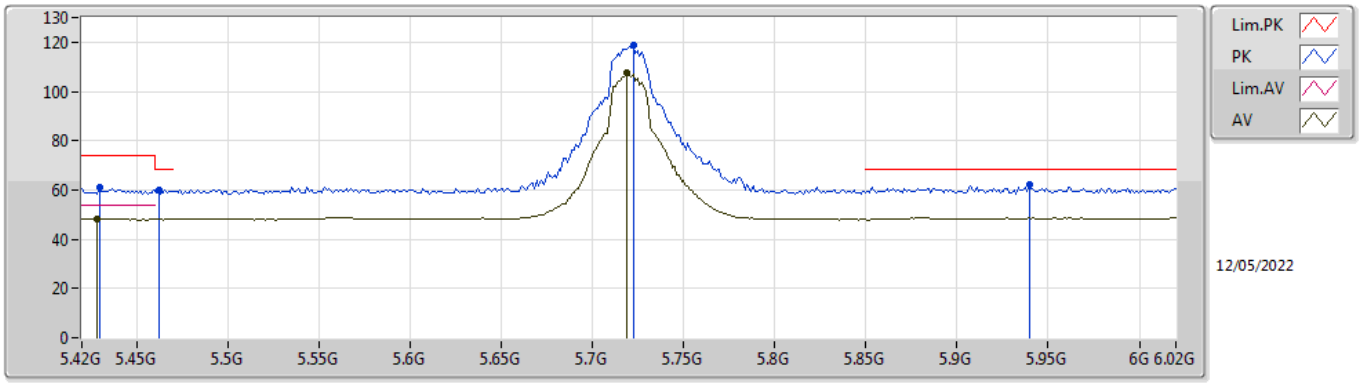


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4296G	60.95	74.00	-13.05	54.53	3	Horizontal	0	2.03	-	34.54	7.23	35.35
AV	5.4284G	48.11	54.00	-5.89	41.69	3	Horizontal	0	2.03	-	34.54	7.23	35.35
PK	5.462G	59.79	68.20	-8.41	53.36	3	Horizontal	0	2.03	-	34.52	7.26	35.35
PK	5.7224G	119.07	Inf	-Inf	112.87	3	Horizontal	0	2.03	-	34.26	7.40	35.46
AV	5.7188G	107.35	Inf	-Inf	101.15	3	Horizontal	0	2.03	-	34.26	7.40	35.46
PK	5.9396G	61.99	68.20	-6.21	55.26	3	Horizontal	0	2.03	-	34.76	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

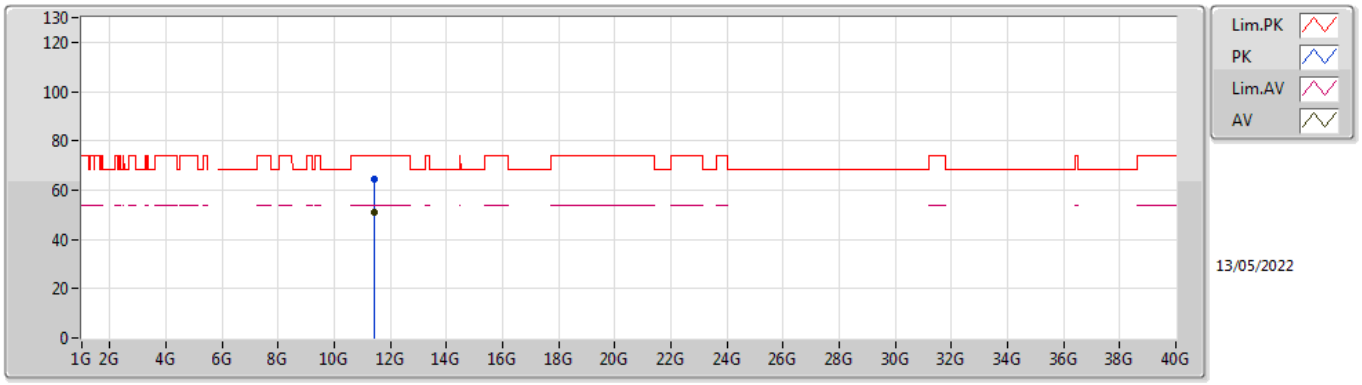


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.43958G	64.61	74.00	-9.39	50.54	3	Vertical	186	2.49	-	38.88	10.72	35.53
AV	11.43748G	50.90	54.00	-3.10	36.84	3	Vertical	186	2.49	-	38.87	10.72	35.53

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

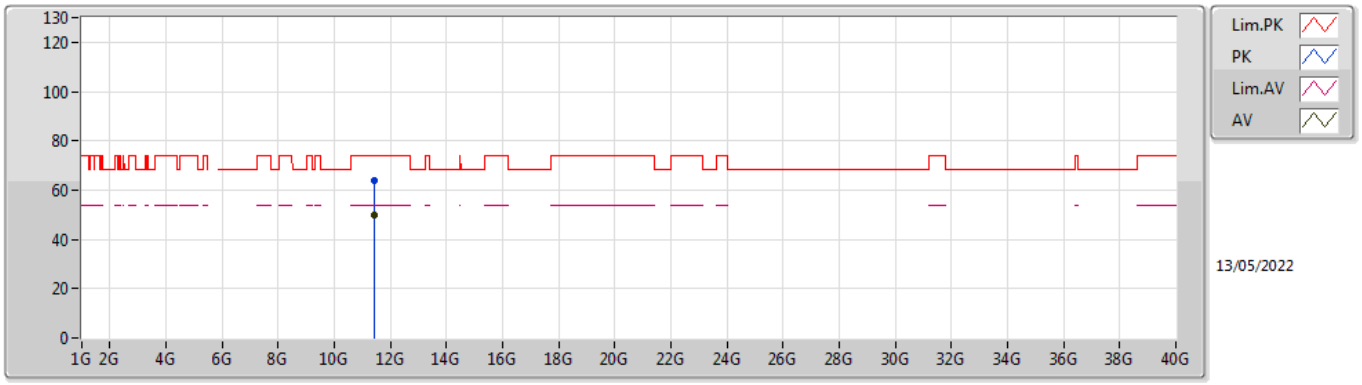


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4361G	63.69	74.00	-10.31	49.63	3	Horizontal	190	2.09	-	38.87	10.72	35.53
AV	11.44054G	49.97	54.00	-4.03	35.90	3	Horizontal	190	2.09	-	38.88	10.72	35.53

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

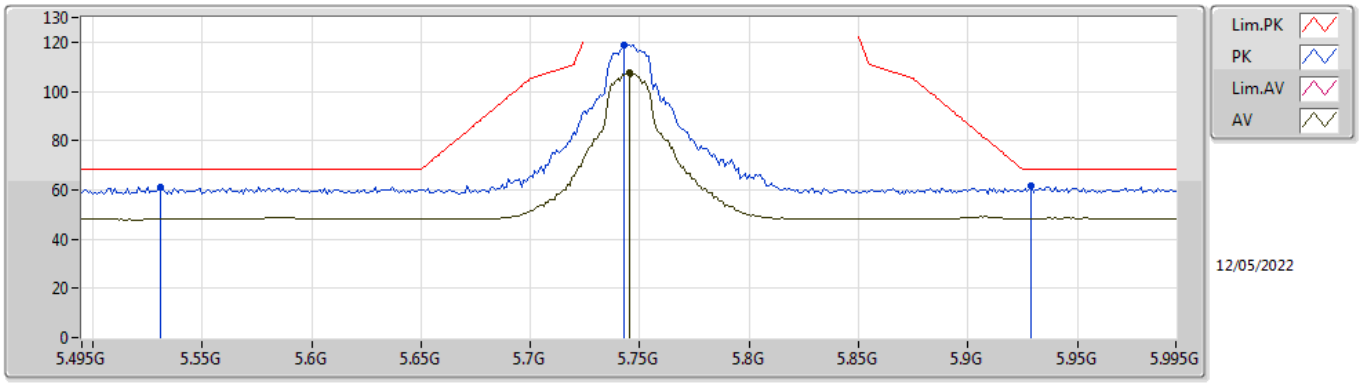


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.531G	61.10	68.20	-7.10	54.54	3	Vertical	319	1.97	-	34.60	7.33	35.37
PK	5.743G	118.62	Inf	-Inf	112.48	3	Vertical	319	1.97	-	34.21	7.40	35.47
AV	5.745G	107.84	Inf	-Inf	101.70	3	Vertical	319	1.97	-	34.21	7.40	35.47
PK	5.929G	61.83	68.20	-6.37	55.14	3	Vertical	319	1.97	-	34.72	7.53	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

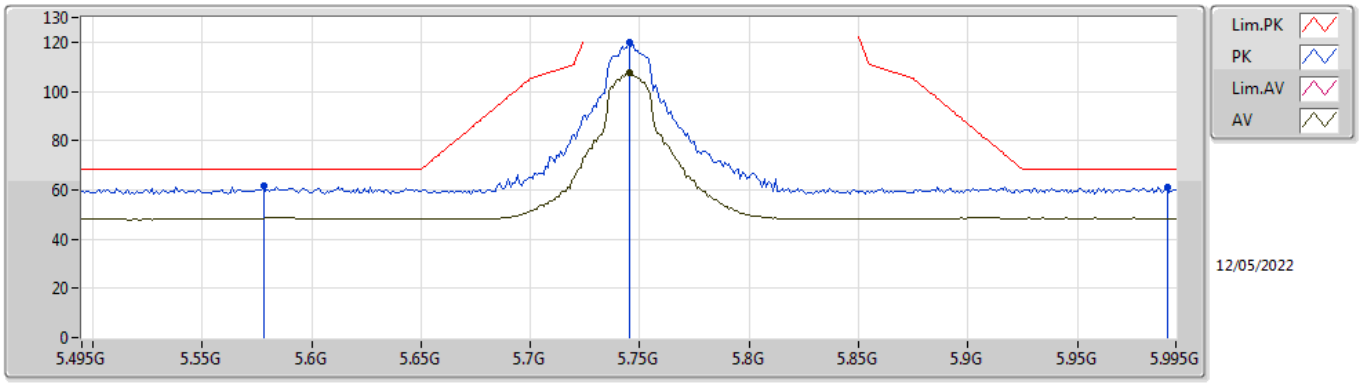


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.578G	61.57	68.20	-6.63	54.98	3	Horizontal	0	2.01	-	34.60	7.38	35.39
PK	5.745G	120.15	Inf	-Inf	114.01	3	Horizontal	0	2.01	-	34.21	7.40	35.47
AV	5.745G	107.51	Inf	-Inf	101.37	3	Horizontal	0	2.01	-	34.21	7.40	35.47
PK	5.991G	61.34	68.20	-6.86	54.55	3	Horizontal	0	2.01	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

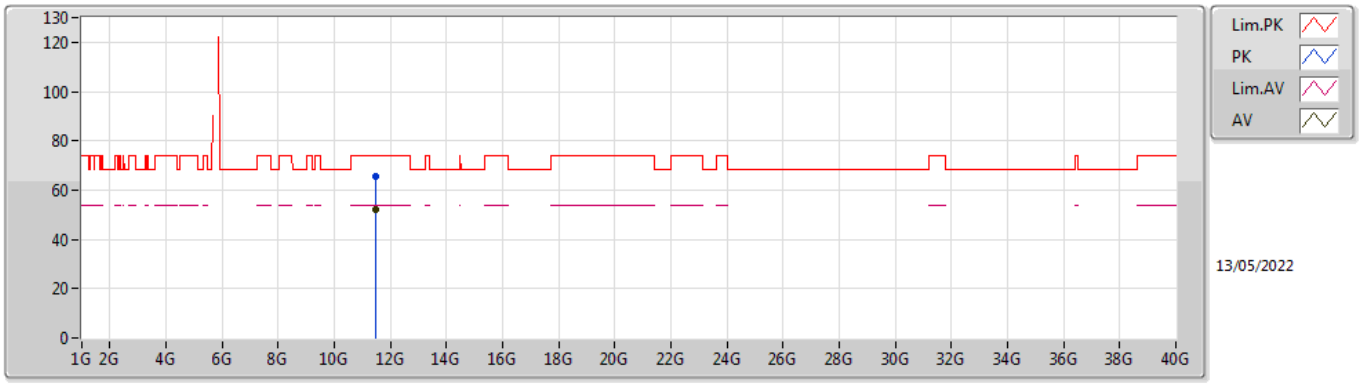


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.48988G	65.35	74.00	-8.65	51.24	3	Vertical	187	2.42	-	38.98	10.72	35.59
AV	11.48754G	51.90	54.00	-2.10	37.79	3	Vertical	187	2.42	-	38.98	10.72	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

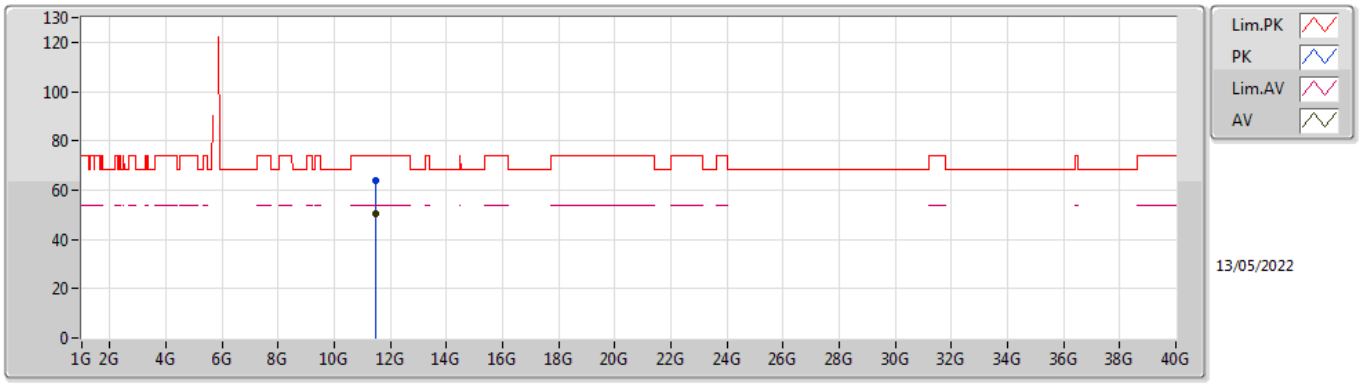


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.49084G	63.82	74.00	-10.18	49.71	3	Horizontal	192	2.06	-	38.98	10.72	35.59
AV	11.49066G	50.50	54.00	-3.50	36.39	3	Horizontal	192	2.06	-	38.98	10.72	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

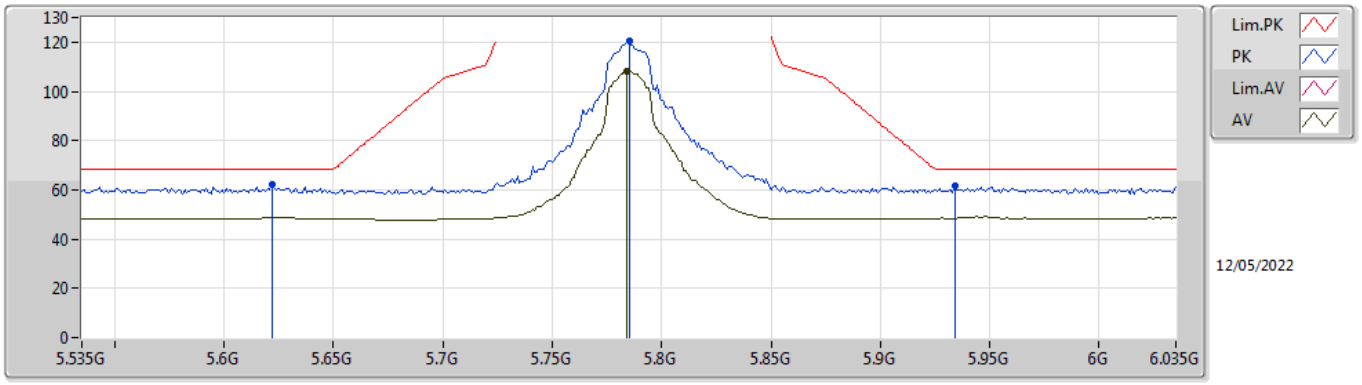


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.622G	62.21	68.20	-5.99	55.66	3	Vertical	318	2.04	-	34.56	7.40	35.41
PK	5.785G	120.43	Inf	-Inf	114.32	3	Vertical	318	2.04	-	34.20	7.40	35.49
AV	5.784G	108.08	Inf	-Inf	101.97	3	Vertical	318	2.04	-	34.20	7.40	35.49
PK	5.934G	61.42	68.20	-6.78	54.72	3	Vertical	318	2.04	-	34.74	7.53	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

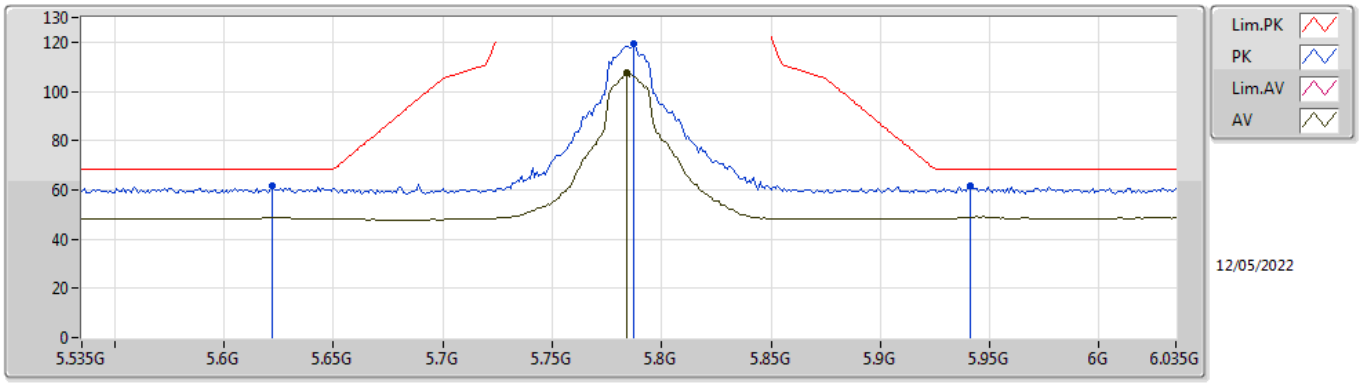


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.622G	61.37	68.20	-6.83	54.82	3	Horizontal	6	1.98	-	34.56	7.40	35.41
PK	5.787G	119.51	Inf	-Inf	113.40	3	Horizontal	6	1.98	-	34.20	7.40	35.49
AV	5.784G	107.67	Inf	-Inf	101.56	3	Horizontal	6	1.98	-	34.20	7.40	35.49
PK	5.941G	61.75	68.20	-6.45	55.02	3	Horizontal	6	1.98	-	34.76	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

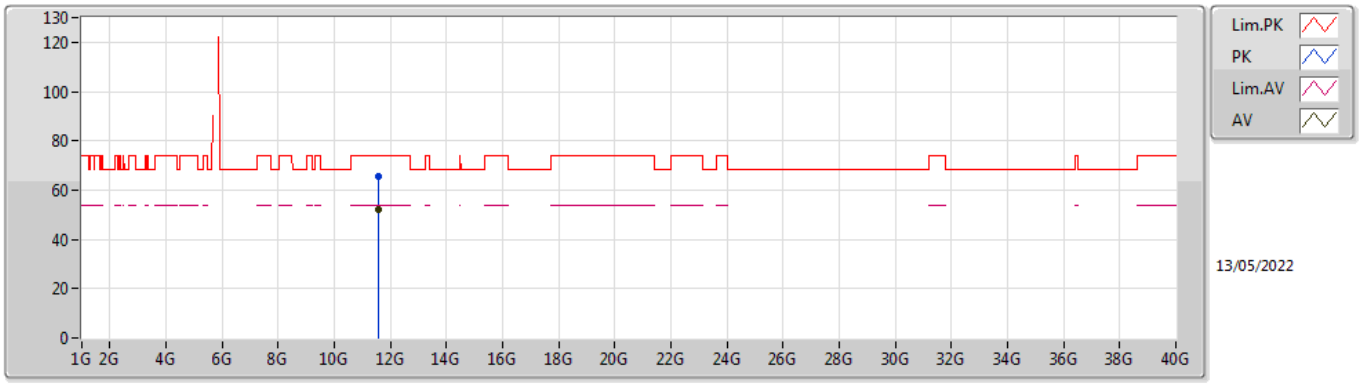


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5703G	65.50	74.00	-8.50	51.06	3	Vertical	185	2.98	-	39.28	10.74	35.58
AV	11.56976G	52.33	54.00	-1.67	37.89	3	Vertical	185	2.98	-	39.28	10.74	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

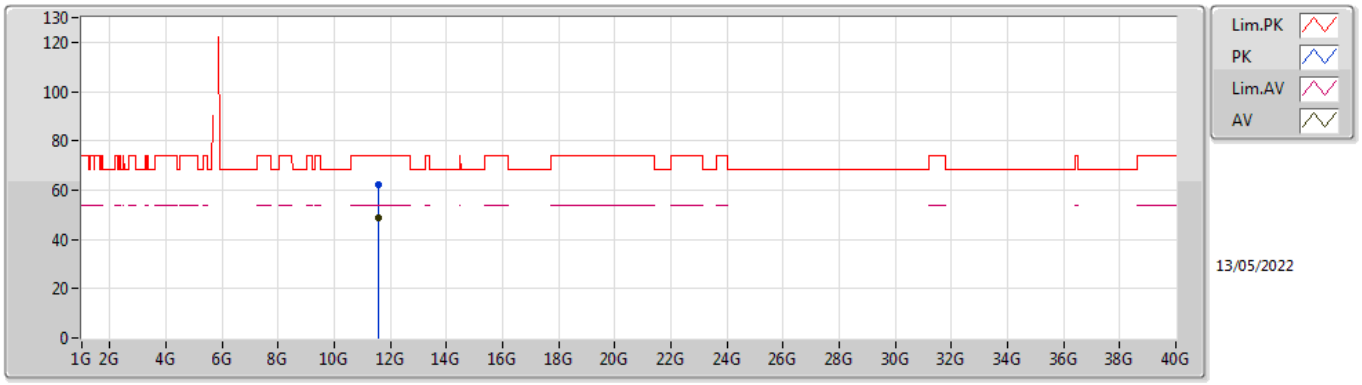


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.57012G	62.26	74.00	-11.74	47.82	3	Horizontal	134	1.80	-	39.28	10.74	35.58
AV	11.57048G	48.82	54.00	-5.18	34.38	3	Horizontal	134	1.80	-	39.28	10.74	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

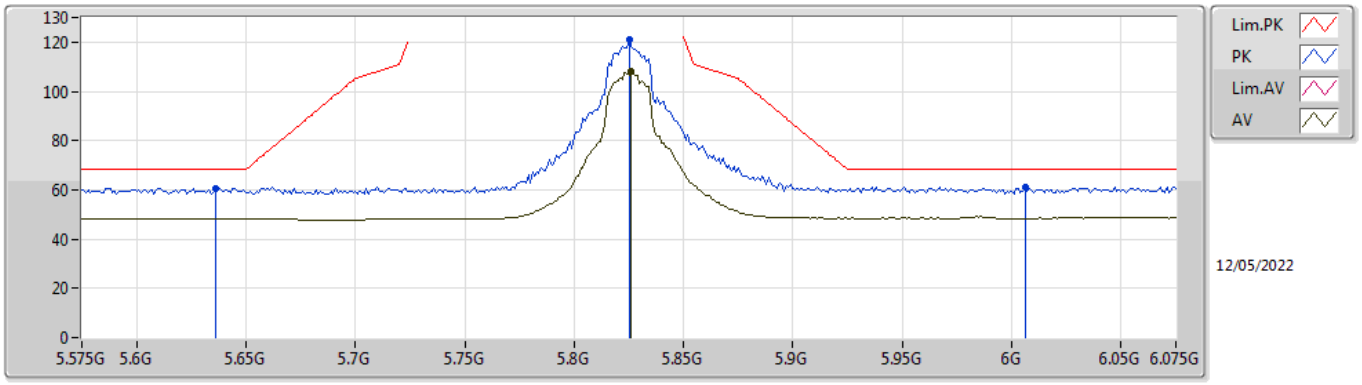


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.636G	60.69	68.20	-7.51	54.18	3	Vertical	321	2.02	-	34.53	7.40	35.42
PK	5.825G	120.94	Inf	-Inf	114.77	3	Vertical	321	2.02	-	34.25	7.43	35.51
AV	5.826G	107.91	Inf	-Inf	101.74	3	Vertical	321	2.02	-	34.25	7.43	35.51
PK	6.006G	61.26	68.20	-6.94	54.45	3	Vertical	321	2.02	-	34.81	7.60	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

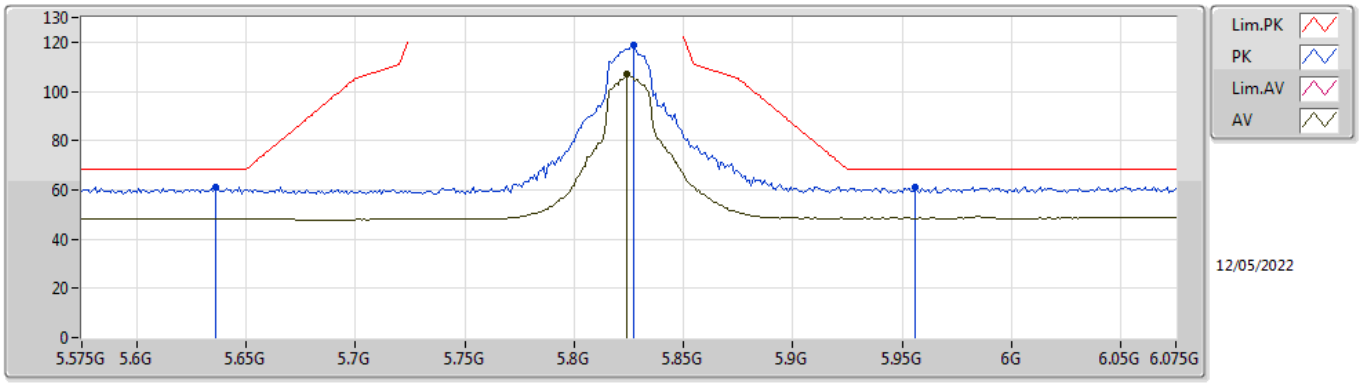


EUT X_2TX
Setting 21.5
03-D-K-3-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.636G	61.04	68.20	-7.16	54.53	3	Horizontal	191	1.99	-	34.53	7.40	35.42
PK	5.827G	118.56	Inf	-Inf	112.39	3	Horizontal	191	1.99	-	34.25	7.43	35.51
AV	5.824G	106.78	Inf	-Inf	100.62	3	Horizontal	191	1.99	-	34.25	7.42	35.51
PK	5.956G	61.17	68.20	-7.03	54.39	3	Horizontal	191	1.99	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

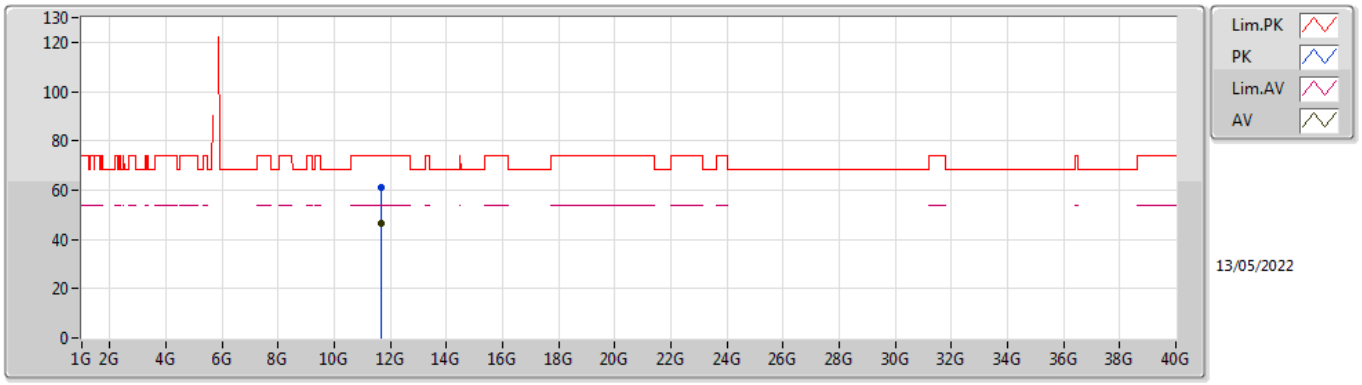


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.64934G	60.86	74.00	-13.14	46.28	3	Vertical	143	1.80	-	39.40	10.75	35.57
AV	11.65156G	46.68	54.00	-7.32	32.10	3	Vertical	143	1.80	-	39.40	10.75	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

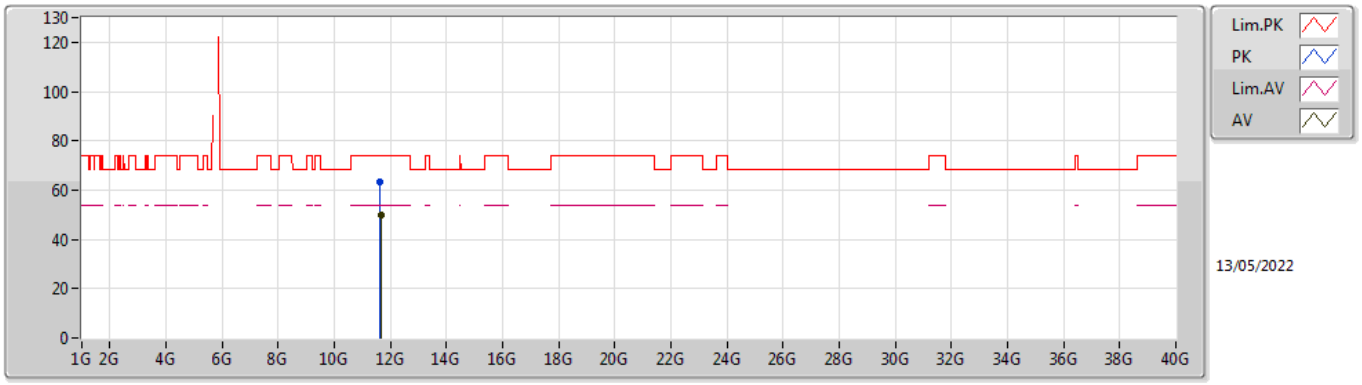


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.64598G	63.11	74.00	-10.89	48.53	3	Horizontal	193	2.05	-	39.40	10.75	35.57
AV	11.65042G	49.66	54.00	-4.34	35.08	3	Horizontal	193	2.05	-	39.40	10.75	35.57

802.11ax HEW40_Nss1,(MCS0)_2TX

5190MHz_TnomVnom

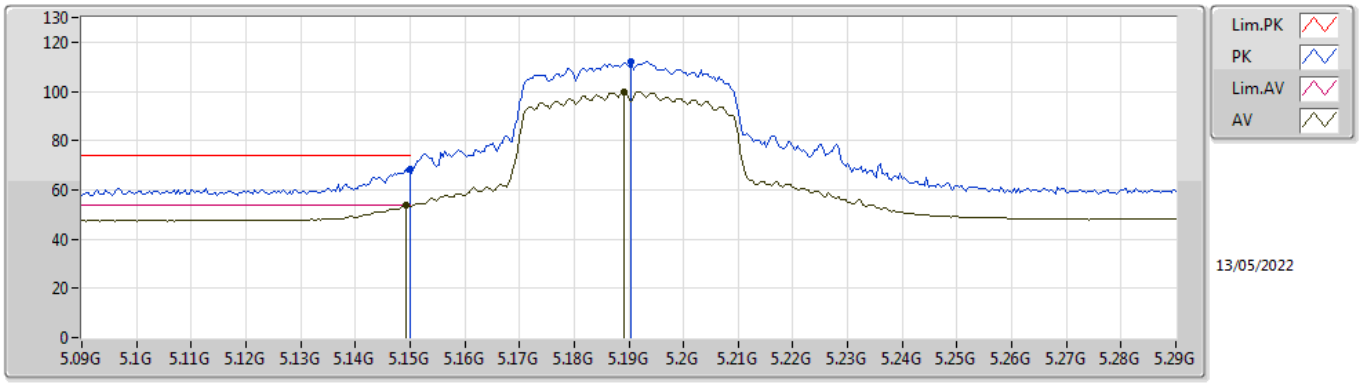


EUT X_2TX
Setting 15.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	68.35	74.00	-5.65	62.52	3	Vertical	255	2.20	-	34.00	7.17	35.34
AV	5.1492G	53.71	54.00	-0.29	47.88	3	Vertical	255	2.20	-	34.00	7.17	35.34
PK	5.1904G	111.90	Inf	-Inf	105.88	3	Vertical	255	2.20	-	34.16	7.20	35.34
AV	5.1892G	99.78	Inf	-Inf	93.77	3	Vertical	255	2.20	-	34.16	7.19	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5190MHz_TnomVnom

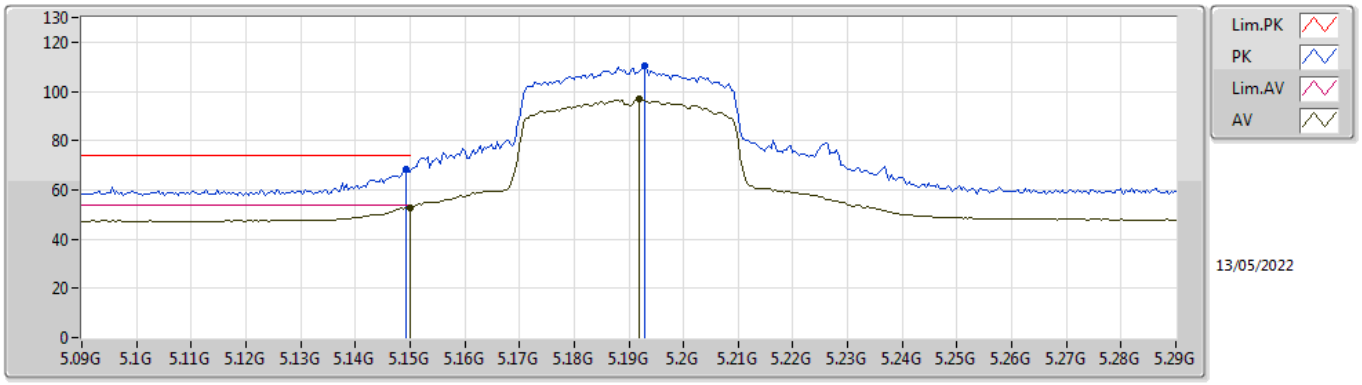


EUT X_2TX
Setting 15.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1492G	68.38	74.00	-5.62	62.55	3	Horizontal	163	1.86	-	34.00	7.17	35.34
AV	5.15G	52.84	54.00	-1.16	47.01	3	Horizontal	163	1.86	-	34.00	7.17	35.34
PK	5.1928G	110.28	Inf	-Inf	104.25	3	Horizontal	163	1.86	-	34.17	7.20	35.34
AV	5.192G	97.06	Inf	-Inf	91.03	3	Horizontal	163	1.86	-	34.17	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5190MHz_TnomVnom

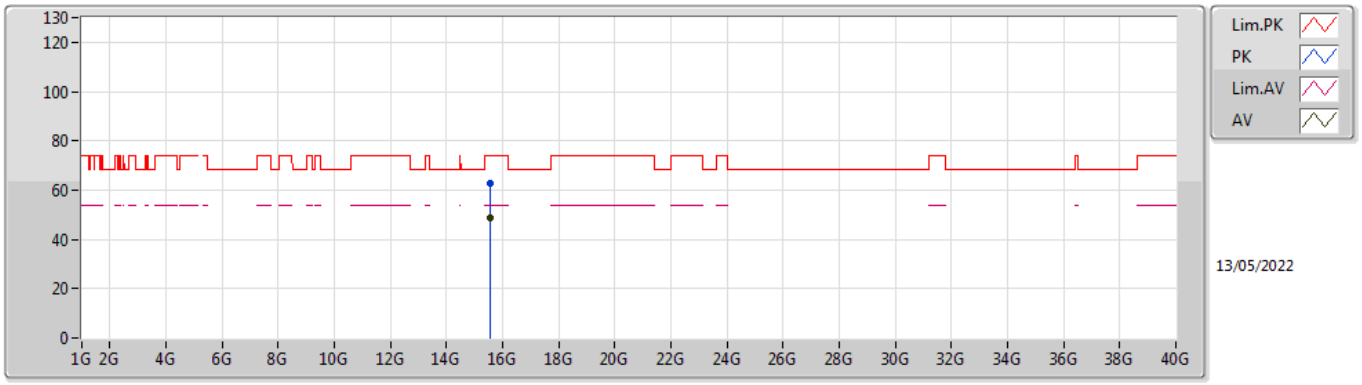


EUT X_2TX
Setting 15.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.57276G	62.51	74.00	-11.49	46.56	3	Vertical	120	1.37	-	38.19	13.19	35.43
AV	15.5715G	48.73	54.00	-5.27	32.77	3	Vertical	120	1.37	-	38.20	13.19	35.43

802.11ax HEW40_Nss1,(MCS0)_2TX

5190MHz_TnomVnom

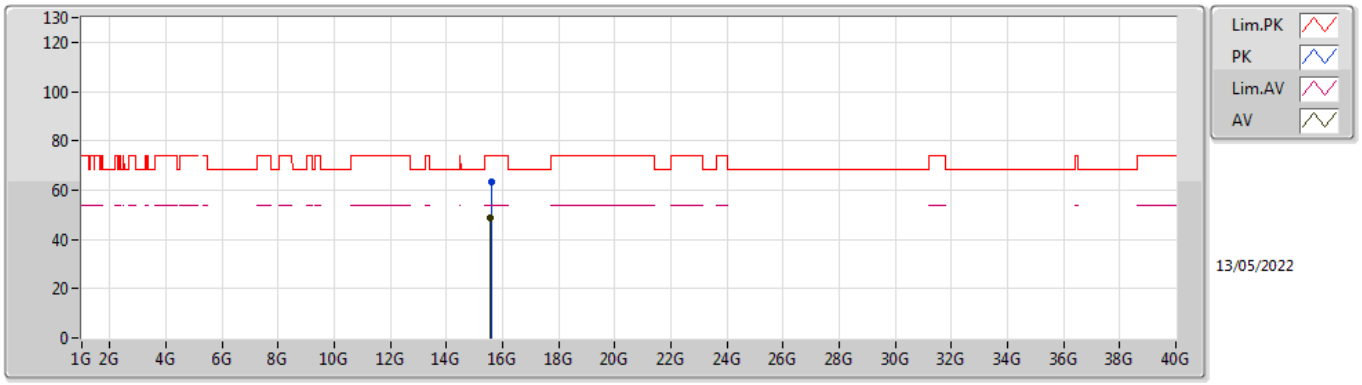


EUT X_2TX
Setting 15.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.58434G	63.10	74.00	-10.90	47.24	3	Horizontal	28	1.68	-	38.11	13.19	35.44
AV	15.57078G	48.71	54.00	-5.29	32.75	3	Horizontal	28	1.68	-	38.20	13.19	35.43

802.11ax HEW40_Nss1,(MCS0)_2TX

5230MHz_TnomVnom

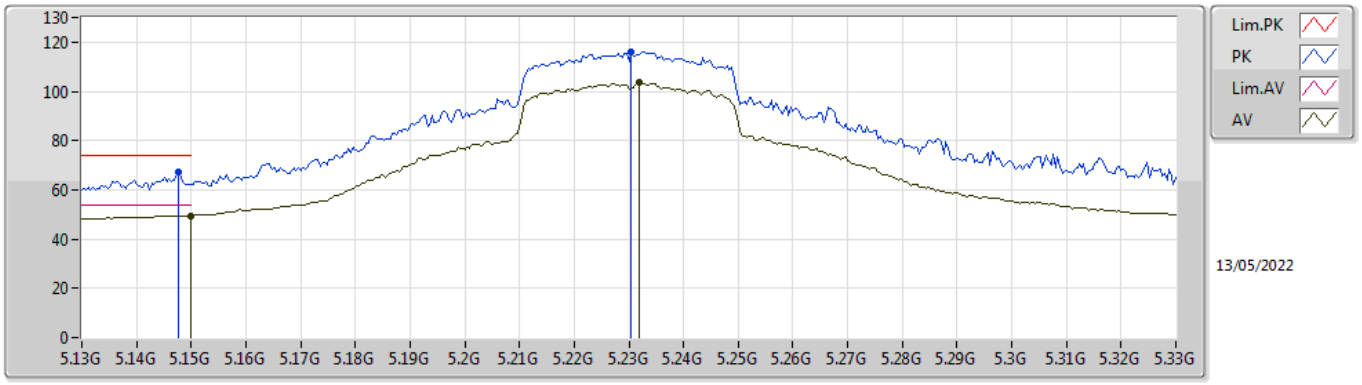


EUT X_2TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1476G	67.03	74.00	-6.97	61.20	3	Vertical	256	1.98	-	34.00	7.17	35.34
AV	5.15G	49.58	54.00	-4.42	43.75	3	Vertical	256	1.98	-	34.00	7.17	35.34
PK	5.2304G	116.17	Inf	-Inf	109.99	3	Vertical	256	1.98	-	34.32	7.20	35.34
AV	5.232G	103.91	Inf	-Inf	97.72	3	Vertical	256	1.98	-	34.33	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5230MHz_TnomVnom

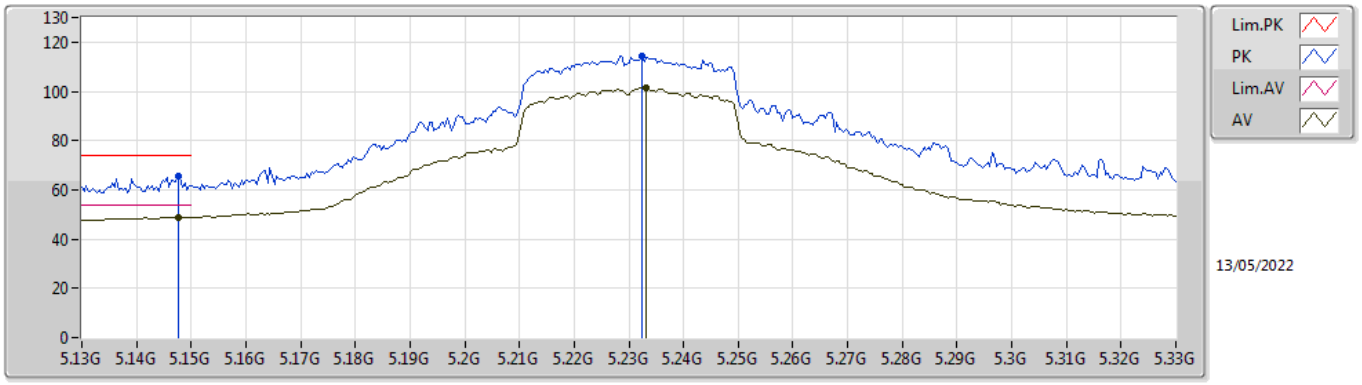


EUT X_2TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1476G	65.84	74.00	-8.16	60.01	3	Horizontal	204	2.19	-	34.00	7.17	35.34
AV	5.1476G	48.84	54.00	-5.16	43.01	3	Horizontal	204	2.19	-	34.00	7.17	35.34
PK	5.2324G	114.36	Inf	-Inf	108.17	3	Horizontal	204	2.19	-	34.33	7.20	35.34
AV	5.2332G	101.55	Inf	-Inf	95.36	3	Horizontal	204	2.19	-	34.33	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5230MHz_TnomVnom

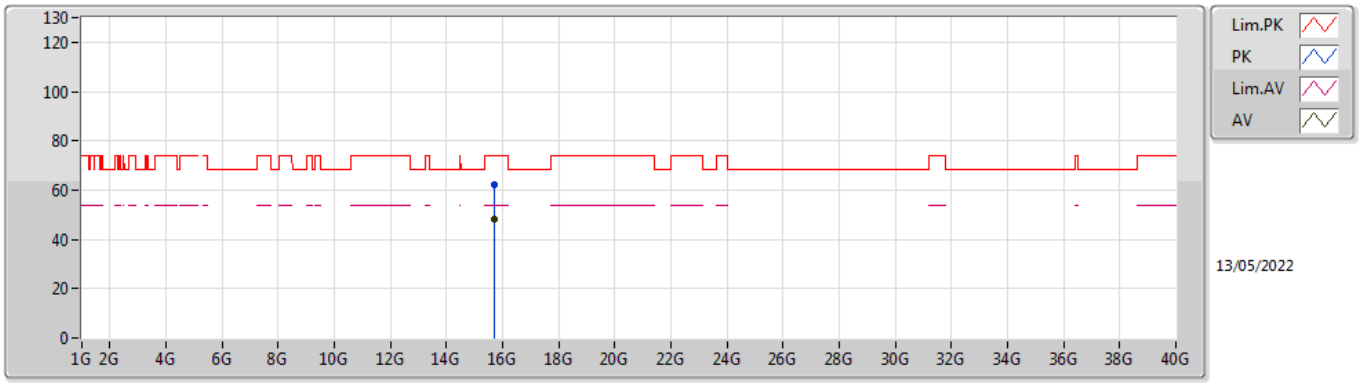


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.70278G	62.05	74.00	-11.95	46.83	3	Vertical	70	1.28	-	37.51	13.25	35.54
AV	15.705G	48.37	54.00	-5.63	33.14	3	Vertical	70	1.28	-	37.52	13.25	35.54

802.11ax HEW40_Nss1,(MCS0)_2TX

5230MHz_TnomVnom

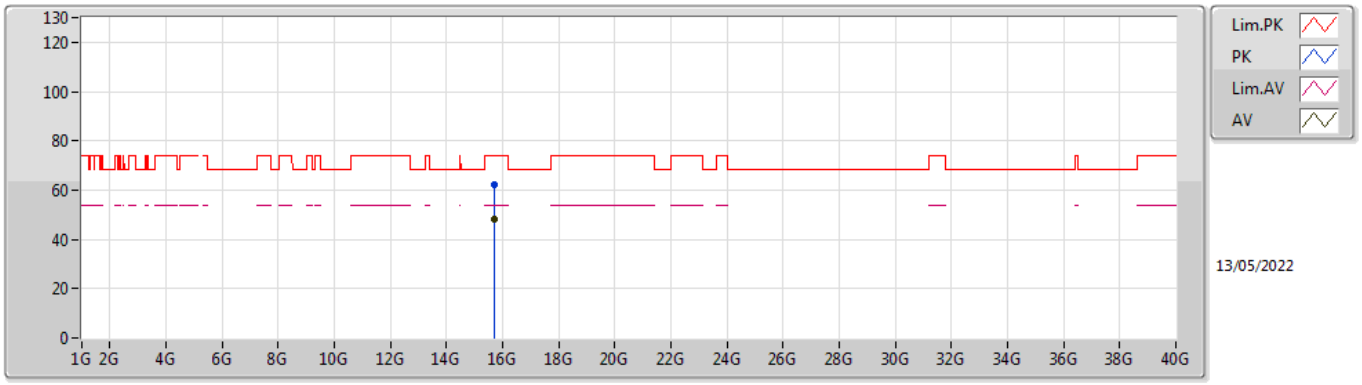


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.69282G	62.25	74.00	-11.75	46.99	3	Horizontal	23	1.13	-	37.54	13.25	35.53
AV	15.70398G	48.36	54.00	-5.64	33.13	3	Horizontal	23	1.13	-	37.52	13.25	35.54

802.11ax HEW40_Nss1,(MCS0)_2TX

5270MHz_TnomVnom

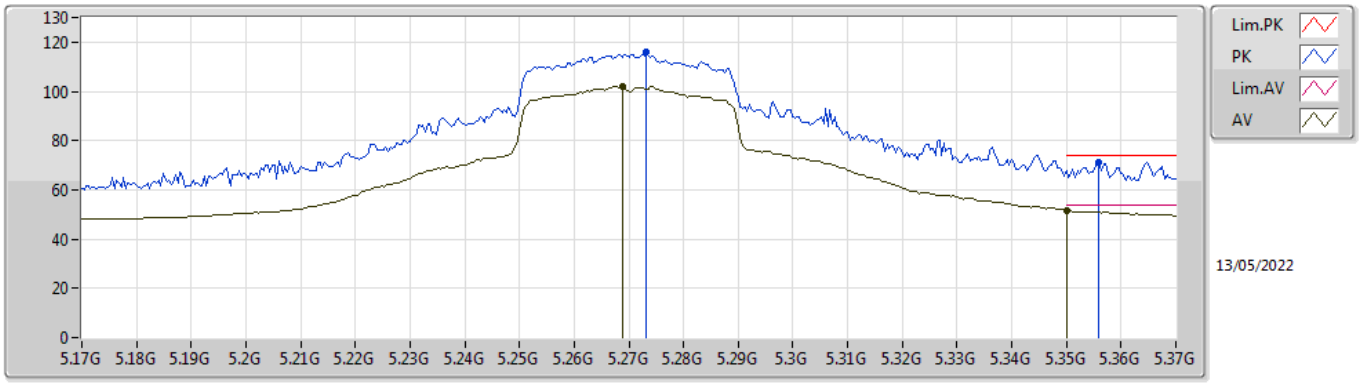


EUT X_2TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2732G	115.86	Inf	-Inf	109.55	3	Vertical	250	1.92	-	34.45	7.20	35.34
AV	5.2688G	102.05	Inf	-Inf	95.75	3	Vertical	250	1.92	-	34.44	7.20	35.34
PK	5.356G	71.02	74.00	-2.98	64.65	3	Vertical	250	1.92	-	34.51	7.20	35.34
AV	5.35G	51.58	54.00	-2.42	45.22	3	Vertical	250	1.92	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5270MHz_TnomVnom

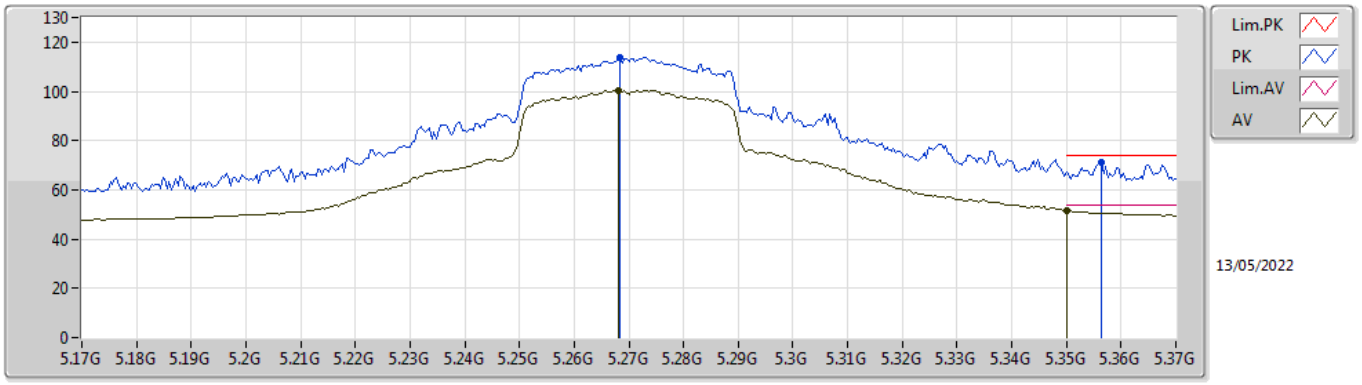


EUT X_2TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2684G	113.78	Inf	-Inf	107.48	3	Horizontal	202	1.96	-	34.44	7.20	35.34
AV	5.268G	100.54	Inf	-Inf	94.24	3	Horizontal	202	1.96	-	34.44	7.20	35.34
PK	5.3564G	71.15	74.00	-2.85	64.78	3	Horizontal	202	1.96	-	34.51	7.20	35.34
AV	5.35G	51.79	54.00	-2.21	45.43	3	Horizontal	202	1.96	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5270MHz_TnomVnom

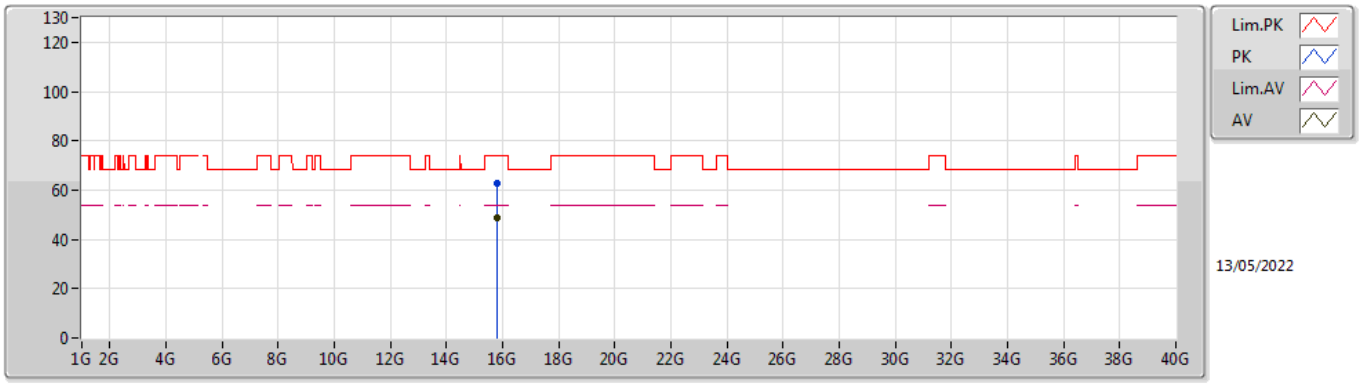


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.80406G	62.75	74.00	-11.25	47.19	3	Vertical	6	1.80	-	37.89	13.30	35.63
AV	15.79608G	48.81	54.00	-5.19	33.25	3	Vertical	6	1.80	-	37.88	13.30	35.62

802.11ax HEW40_Nss1,(MCS0)_2TX

5270MHz_TnomVnom

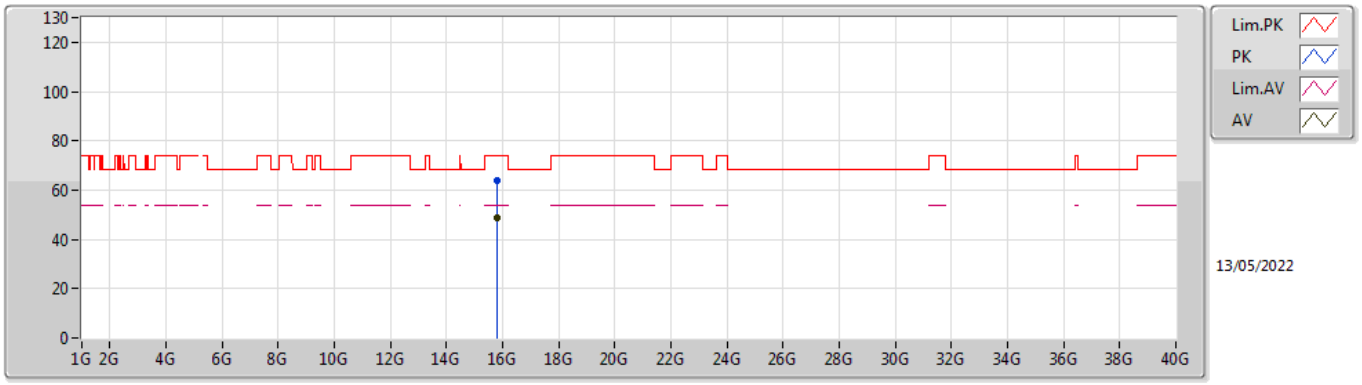


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.80412G	63.93	74.00	-10.07	48.37	3	Horizontal	86	1.45	-	37.89	13.30	35.63
AV	15.80226G	48.72	54.00	-5.28	33.15	3	Horizontal	86	1.45	-	37.89	13.30	35.62

802.11ax HEW40_Nss1,(MCS0)_2TX

5310MHz_TnomVnom

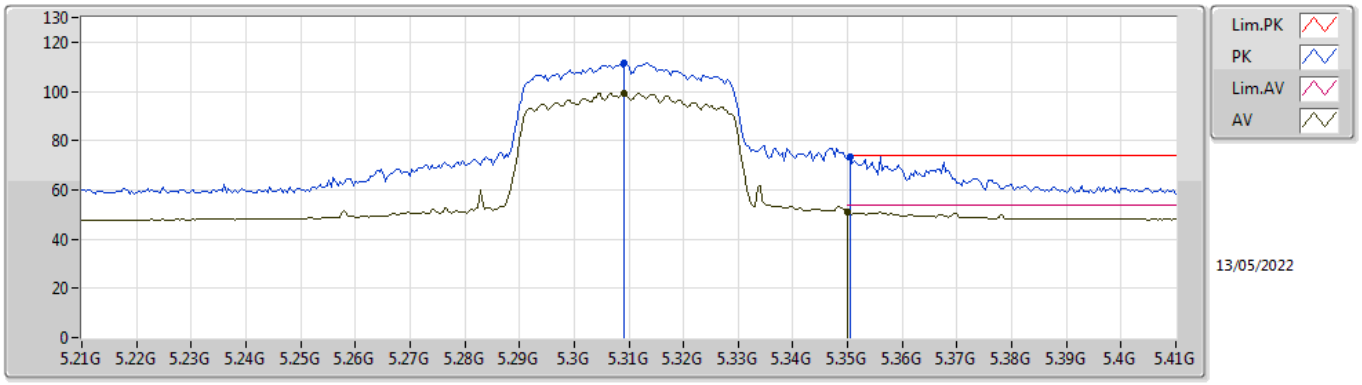


EUT X_2TX
Setting 14.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3092G	111.31	Inf	-Inf	104.95	3	Vertical	249	1.99	-	34.50	7.20	35.34
AV	5.3092G	99.22	Inf	-Inf	92.86	3	Vertical	249	1.99	-	34.50	7.20	35.34
PK	5.3504G	73.34	74.00	-0.66	66.98	3	Vertical	249	1.99	-	34.50	7.20	35.34
AV	5.35G	51.16	54.00	-2.84	44.80	3	Vertical	249	1.99	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5310MHz_TnomVnom

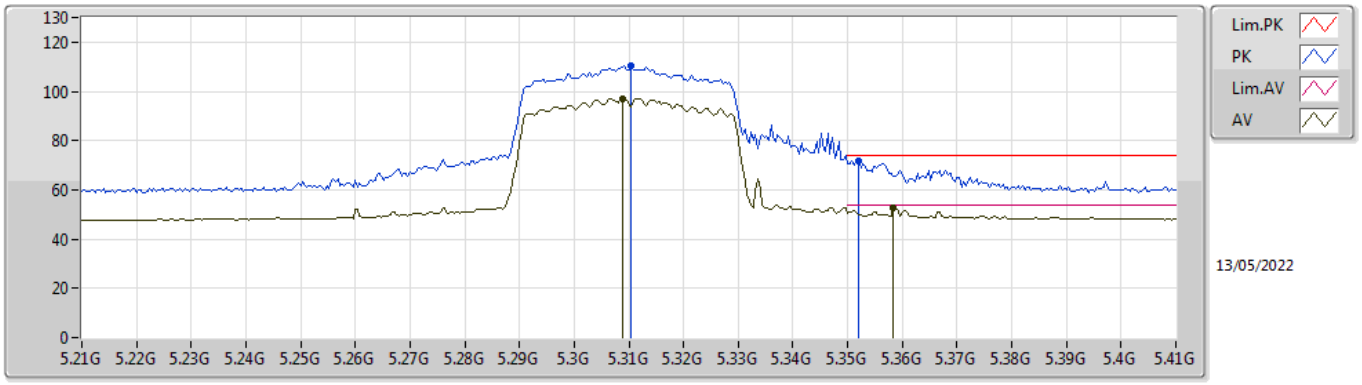


EUT X_2TX
Setting 14.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3104G	110.54	Inf	-Inf	104.18	3	Horizontal	160	1.98	-	34.50	7.20	35.34
AV	5.3088G	97.12	Inf	-Inf	90.76	3	Horizontal	160	1.98	-	34.50	7.20	35.34
PK	5.352G	71.80	74.00	-2.20	65.44	3	Horizontal	160	1.98	-	34.50	7.20	35.34
AV	5.3584G	52.62	54.00	-1.38	46.24	3	Horizontal	160	1.98	-	34.52	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5310MHz_TnomVnom

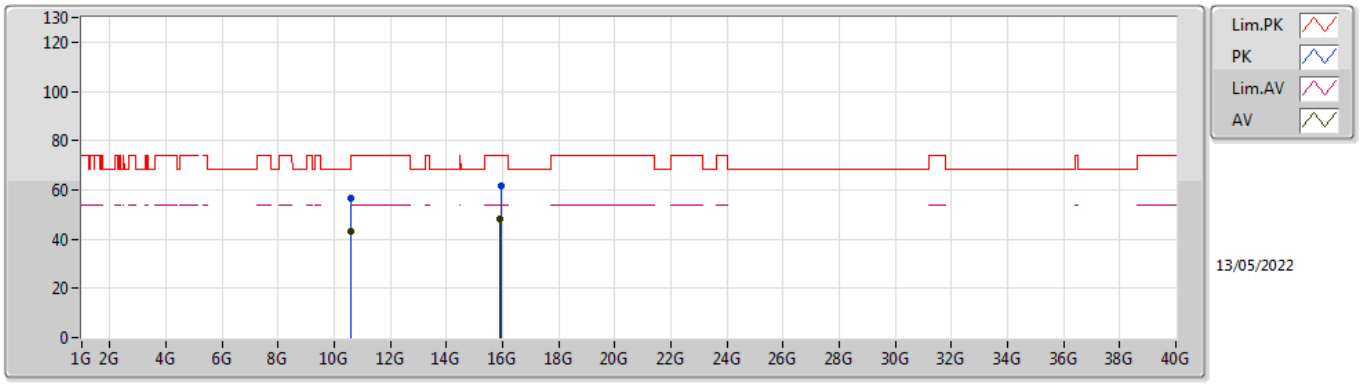


EUT X_2TX
Setting 14.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.61394G	56.55	74.00	-17.45	43.10	3	Vertical	165	1.19	-	38.23	10.59	35.37
AV	10.61076G	43.14	54.00	-10.86	29.70	3	Vertical	165	1.19	-	38.22	10.59	35.37
PK	15.92856G	61.85	74.00	-12.15	46.68	3	Vertical	65	1.55	-	37.54	13.36	35.73
AV	15.9156G	48.20	54.00	-5.80	32.99	3	Vertical	65	1.55	-	37.57	13.36	35.72

802.11ax HEW40_Nss1,(MCS0)_2TX

5310MHz_TnomVnom

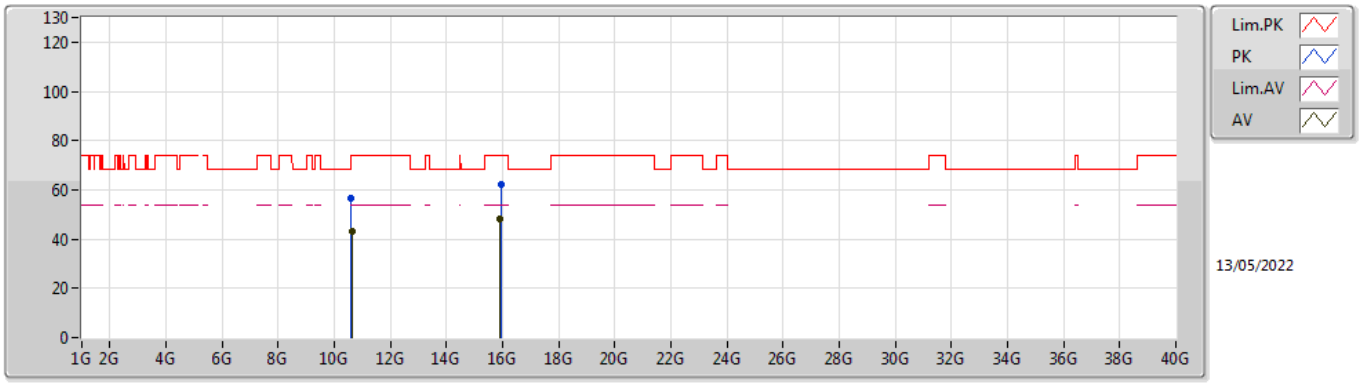


EUT X_2TX
Setting 14.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60902G	56.86	74.00	-17.14	43.43	3	Horizontal	154	1.09	-	38.22	10.59	35.38
AV	10.61886G	43.14	54.00	-10.86	29.68	3	Horizontal	154	1.09	-	38.24	10.59	35.37
PK	15.93936G	61.94	74.00	-12.06	46.79	3	Horizontal	343	2.94	-	37.52	13.37	35.74
AV	15.91848G	48.21	54.00	-5.79	33.01	3	Horizontal	343	2.94	-	37.56	13.36	35.72

802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TnomVnom

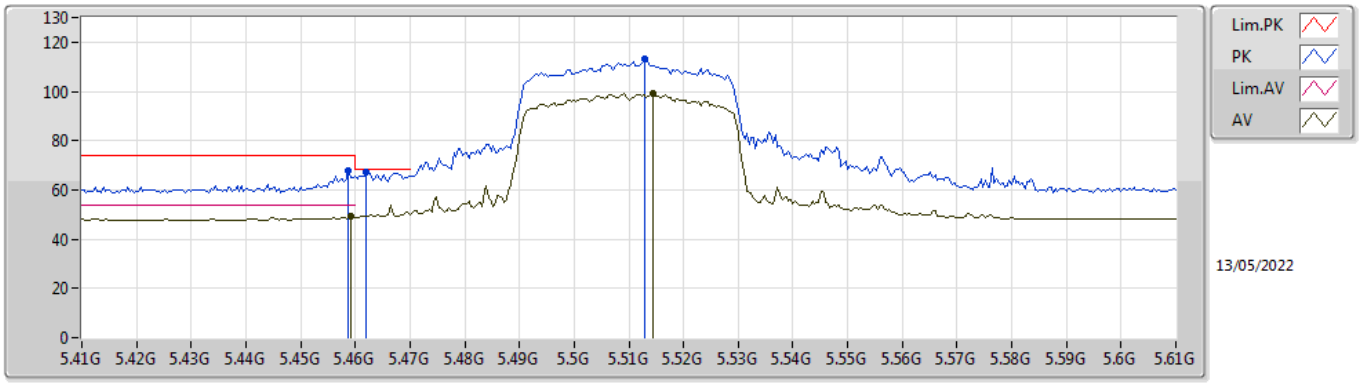


EUT X_2TX
Setting 14.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4588G	67.81	74.00	-6.19	61.38	3	Vertical	241	1.98	-	34.52	7.26	35.35
AV	5.4592G	49.12	54.00	-4.88	42.69	3	Vertical	241	1.98	-	34.52	7.26	35.35
PK	5.462G	67.48	68.20	-0.72	61.05	3	Vertical	241	1.98	-	34.52	7.26	35.35
PK	5.5128G	112.96	Inf	-Inf	106.41	3	Vertical	241	1.98	-	34.60	7.31	35.36
AV	5.5144G	98.94	Inf	-Inf	92.39	3	Vertical	241	1.98	-	34.60	7.31	35.36

802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TnomVnom

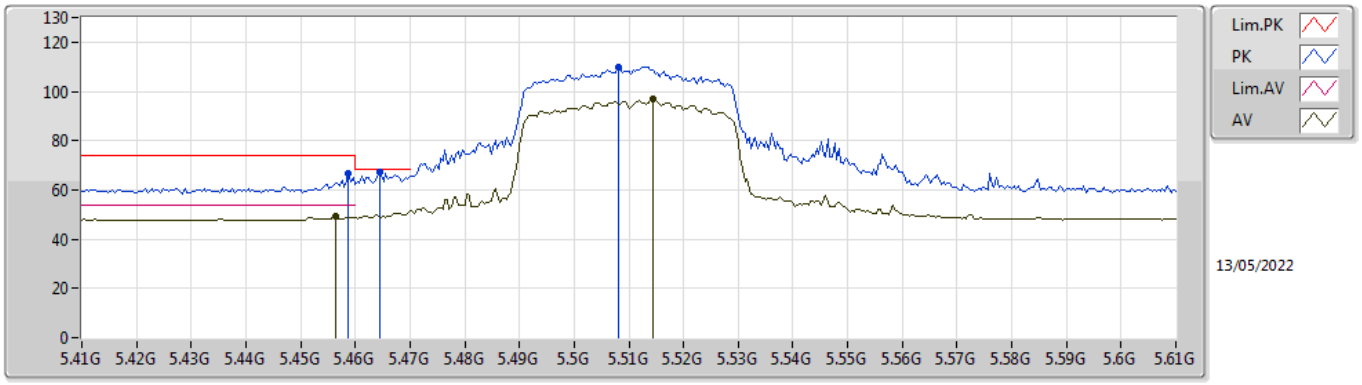


EUT X_2TX
Setting 14.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4588G	66.43	74.00	-7.57	60.00	3	Horizontal	160	1.96	-	34.52	7.26	35.35
AV	5.4564G	49.36	54.00	-4.64	42.94	3	Horizontal	160	1.96	-	34.51	7.26	35.35
PK	5.4644G	67.08	68.20	-1.12	60.64	3	Horizontal	160	1.96	-	34.53	7.26	35.35
PK	5.508G	109.99	Inf	-Inf	103.43	3	Horizontal	160	1.96	-	34.60	7.31	35.35
AV	5.5144G	96.67	Inf	-Inf	90.12	3	Horizontal	160	1.96	-	34.60	7.31	35.36

802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TnomVnom

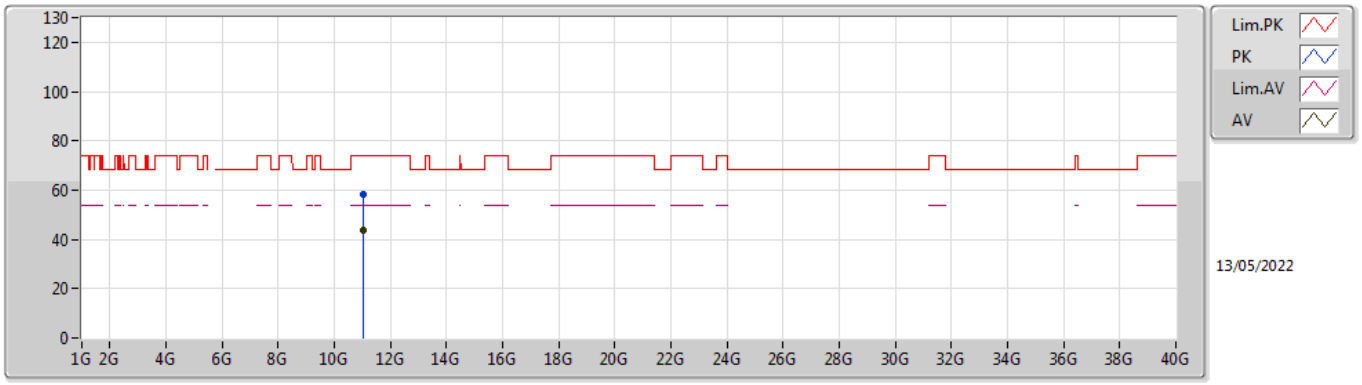


EUT X_2TX
Setting 14.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0293G	58.02	74.00	-15.98	44.01	3	Vertical	320	1.96	-	38.43	10.65	35.07
AV	11.0311G	43.90	54.00	-10.10	29.89	3	Vertical	320	1.96	-	38.43	10.65	35.07

802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TnomVnom

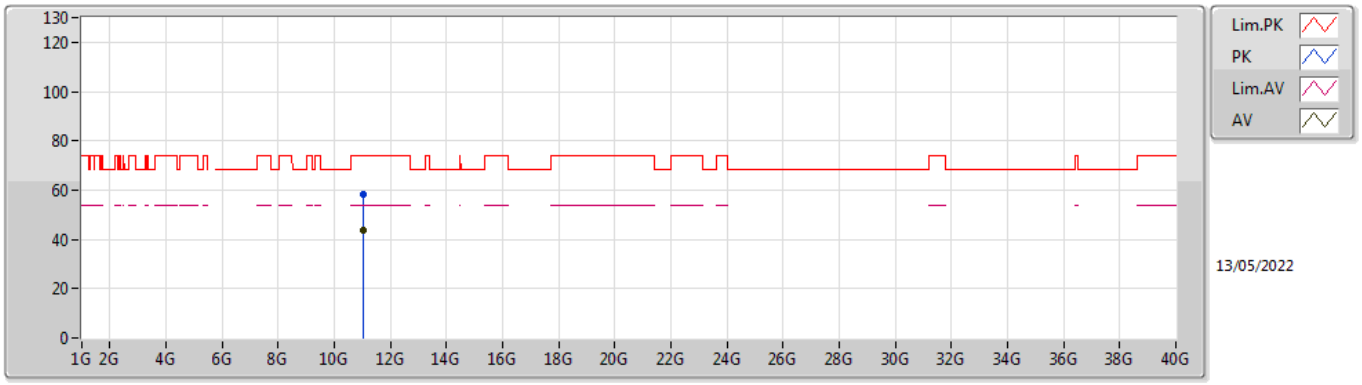


EUT X_2TX
Setting 14.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0164G	58.08	74.00	-15.92	44.07	3	Horizontal	91	1.87	-	38.42	10.65	35.06
AV	11.03176G	43.90	54.00	-10.10	29.90	3	Horizontal	91	1.87	-	38.43	10.65	35.08

802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TnomVnom

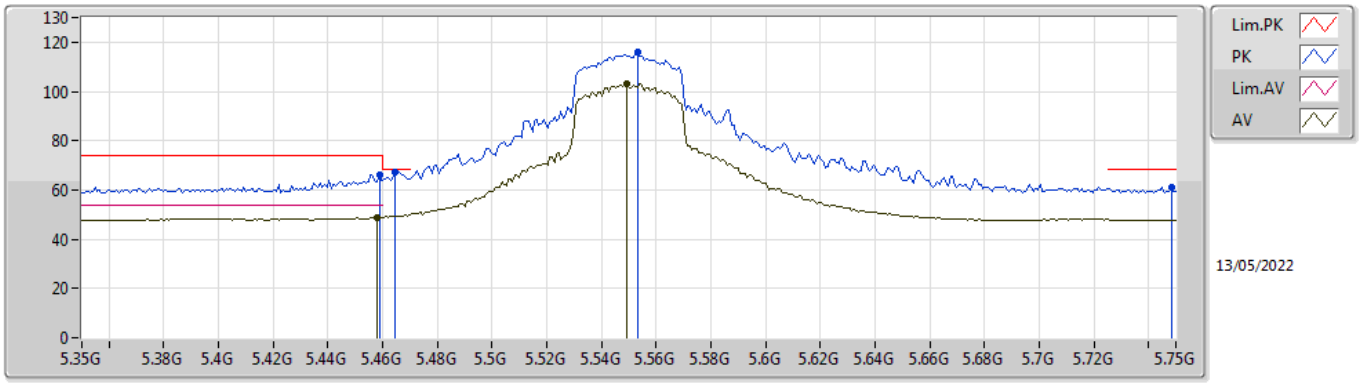


EUT X_2TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4588G	66.06	74.00	-7.94	59.63	3	Vertical	240	2.05	-	34.52	7.26	35.35
AV	5.458G	48.82	54.00	-5.18	42.39	3	Vertical	240	2.05	-	34.52	7.26	35.35
PK	5.4644G	67.31	68.20	-0.89	60.87	3	Vertical	240	2.05	-	34.53	7.26	35.35
PK	5.5532G	115.96	Inf	-Inf	109.39	3	Vertical	240	2.05	-	34.60	7.35	35.38
AV	5.5492G	103.18	Inf	-Inf	96.60	3	Vertical	240	2.05	-	34.60	7.35	35.37
PK	5.7484G	61.03	68.20	-7.17	54.90	3	Vertical	240	2.05	-	34.20	7.40	35.47

802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TnomVnom

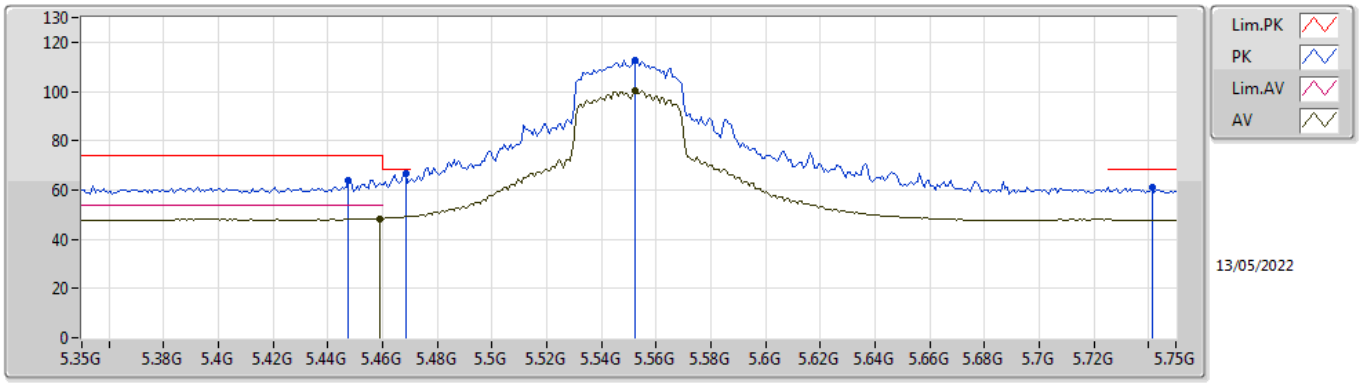


EUT X_2TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4476G	64.03	74.00	-9.97	57.63	3	Horizontal	334	1.92	-	34.50	7.25	35.35
PK	5.4684G	66.48	68.20	-1.72	60.02	3	Horizontal	334	1.92	-	34.54	7.27	35.35
AV	5.4588G	48.41	54.00	-5.59	41.98	3	Horizontal	334	1.92	-	34.52	7.26	35.35
PK	5.5524G	112.85	Inf	-Inf	106.28	3	Horizontal	334	1.92	-	34.60	7.35	35.38
AV	5.5524G	100.04	Inf	-Inf	93.47	3	Horizontal	334	1.92	-	34.60	7.35	35.38
PK	5.7412G	61.17	68.20	-7.03	55.02	3	Horizontal	334	1.92	-	34.22	7.40	35.47

802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TnomVnom

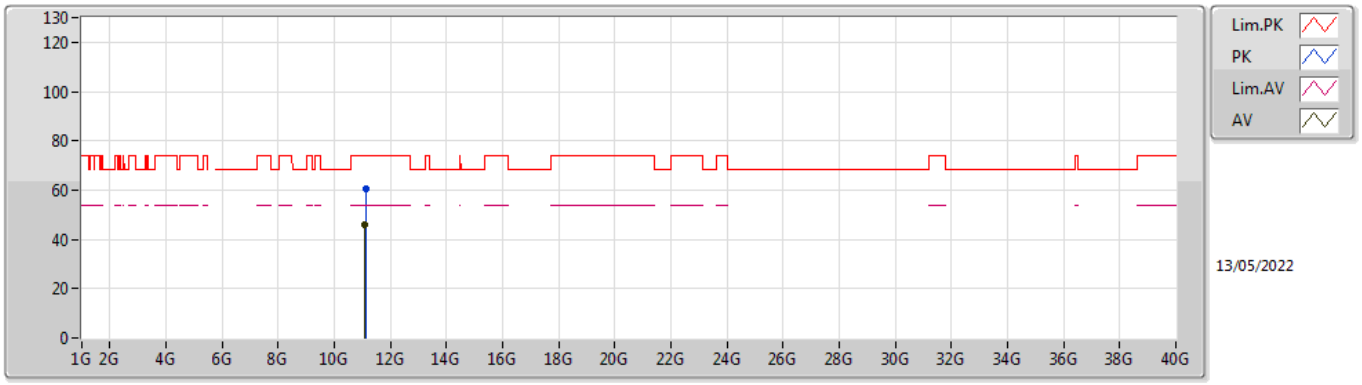


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1069G	60.53	74.00	-13.47	46.51	3	Vertical	224	1.84	-	38.51	10.67	35.16
AV	11.1042G	45.97	54.00	-8.03	31.96	3	Vertical	224	1.84	-	38.50	10.67	35.16

802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TnomVnom

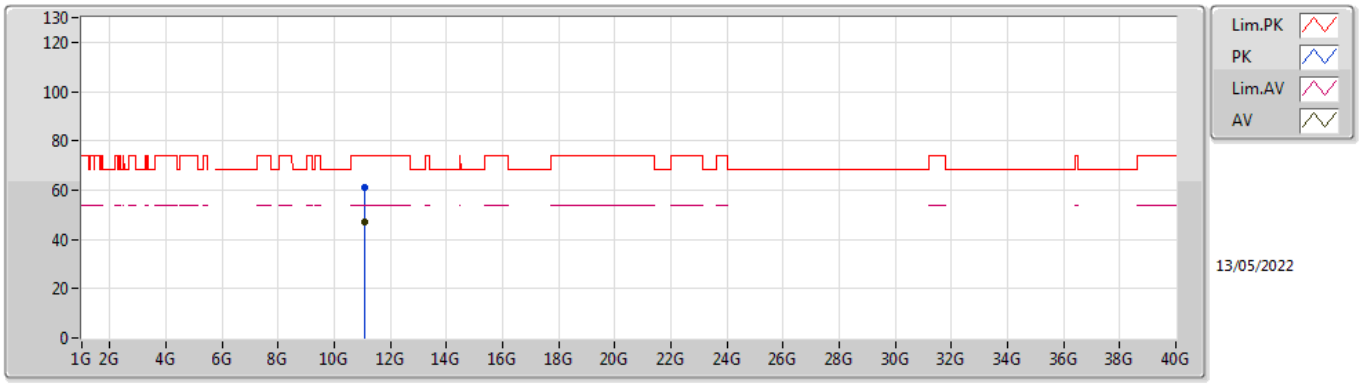


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.097G	61.11	74.00	-12.89	47.10	3	Horizontal	219	2.08	-	38.50	10.66	35.15
AV	11.10396G	47.19	54.00	-6.81	33.18	3	Horizontal	219	2.08	-	38.50	10.67	35.16

802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TnomVnom

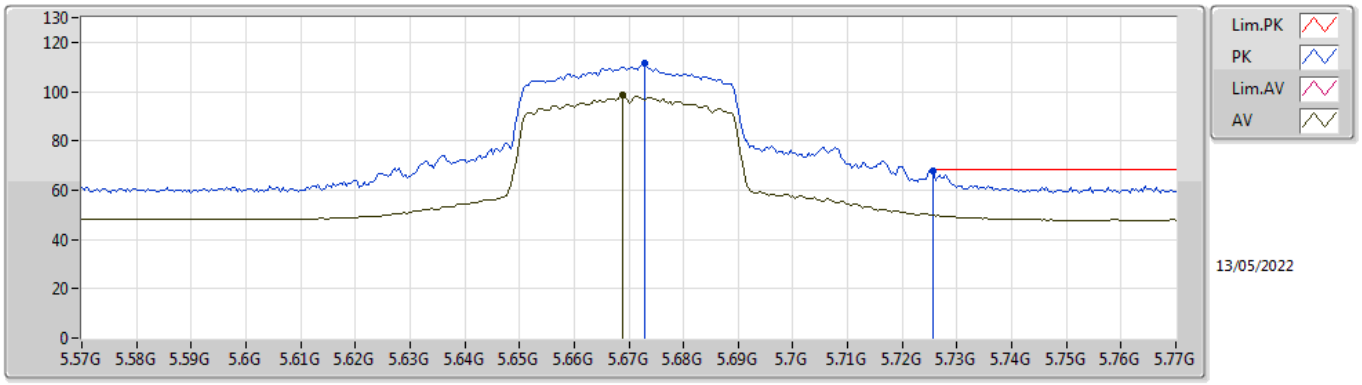


EUT X_2TX
Setting 14.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6728G	111.36	Inf	-Inf	104.99	3	Vertical	326	1.79	-	34.41	7.40	35.44
AV	5.6688G	98.42	Inf	-Inf	92.03	3	Vertical	326	1.79	-	34.42	7.40	35.43
PK	5.7256G	68.01	68.20	-0.19	61.82	3	Vertical	326	1.79	-	34.25	7.40	35.46

802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TnomVnom

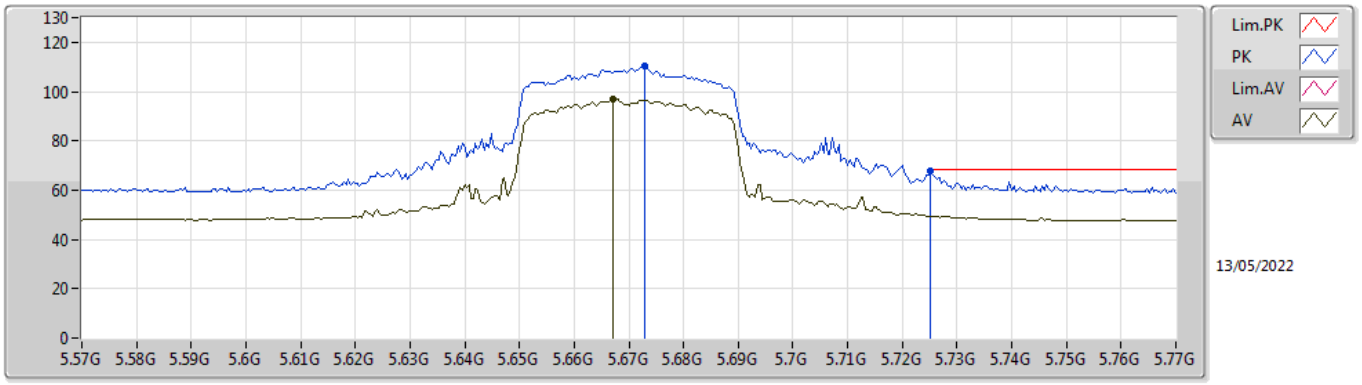


EUT X_2TX
Setting 14.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6728G	110.47	Inf	-Inf	104.10	3	Horizontal	159	1.80	-	34.41	7.40	35.44
AV	5.6672G	97.12	Inf	-Inf	90.72	3	Horizontal	159	1.80	-	34.43	7.40	35.43
PK	5.7252G	67.82	68.20	-0.38	61.63	3	Horizontal	159	1.80	-	34.25	7.40	35.46

802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TnomVnom

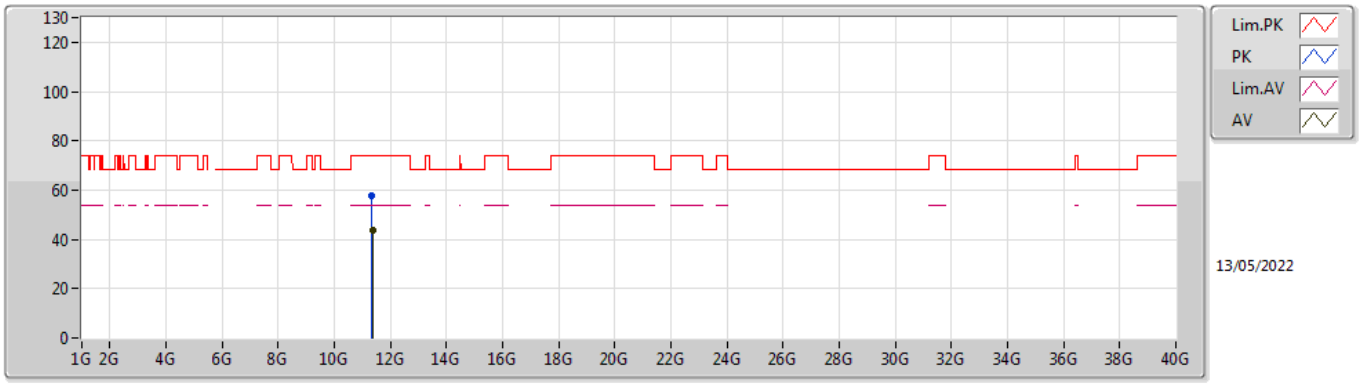


EUT X_2TX
Setting 14.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.34414G	57.52	74.00	-16.48	43.51	3	Vertical	222	1.47	-	38.74	10.70	35.43
AV	11.3529G	43.79	54.00	-10.21	29.78	3	Vertical	222	1.47	-	38.75	10.70	35.44

802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TnomVnom

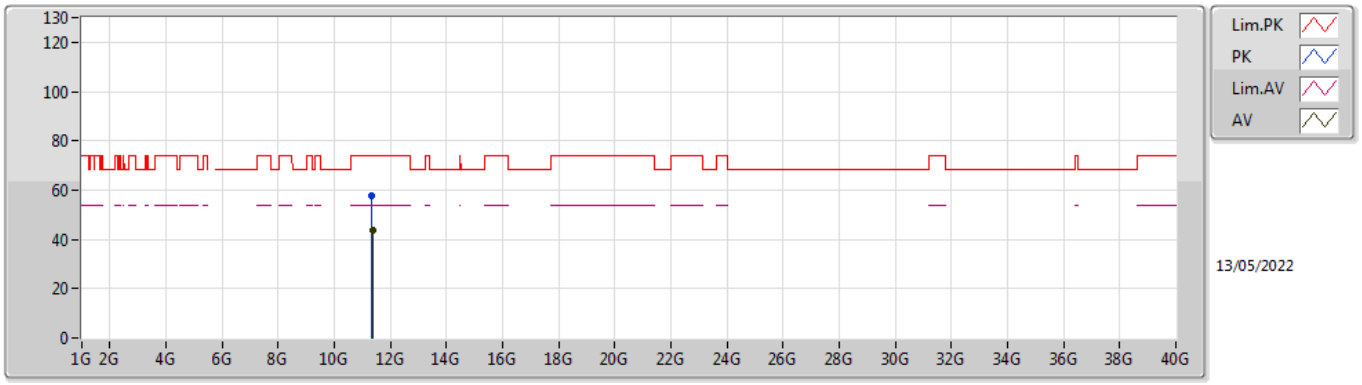


EUT X_2TX
Setting 14.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.34126G	57.54	74.00	-16.46	43.52	3	Horizontal	319	2.66	-	38.74	10.70	35.42
AV	11.35308G	43.76	54.00	-10.24	29.75	3	Horizontal	319	2.66	-	38.75	10.70	35.44

802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

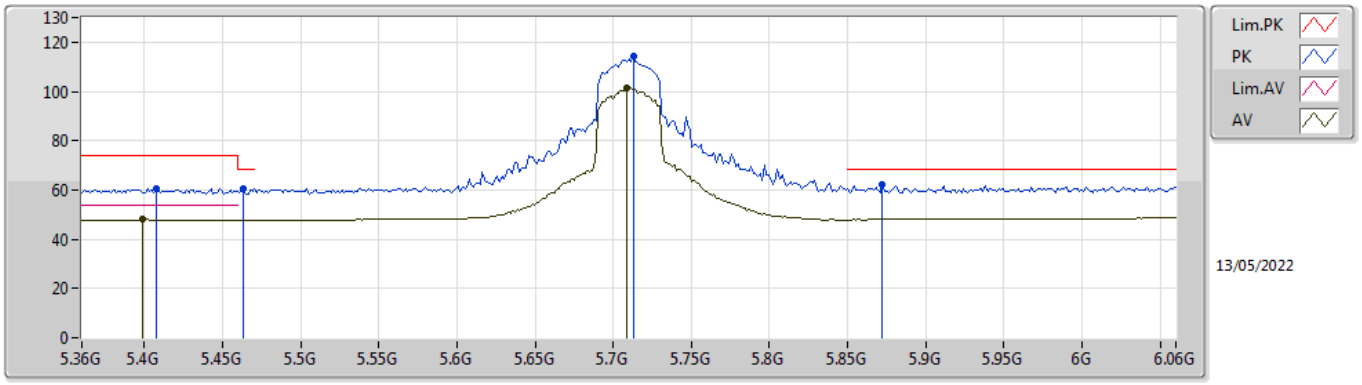


EUT X_2TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4076G	60.60	74.00	-13.40	54.16	3	Vertical	324	1.80	-	34.58	7.21	35.35
AV	5.3992G	48.00	54.00	-6.00	41.55	3	Vertical	324	1.80	-	34.60	7.20	35.35
PK	5.4636G	60.49	68.20	-7.71	54.05	3	Vertical	324	1.80	-	34.53	7.26	35.35
PK	5.7128G	114.38	Inf	-Inf	108.17	3	Vertical	324	1.80	-	34.27	7.40	35.46
AV	5.7086G	101.56	Inf	-Inf	95.33	3	Vertical	324	1.80	-	34.28	7.40	35.45
PK	5.8724G	62.17	68.20	-6.03	55.81	3	Vertical	324	1.80	-	34.43	7.47	35.54

802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

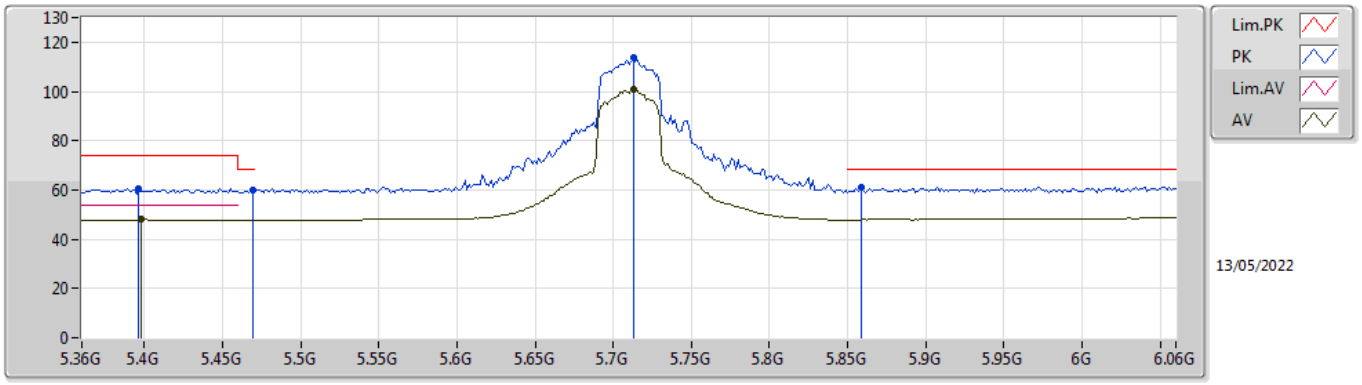


EUT X_2TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3964G	60.38	74.00	-13.62	53.94	3	Horizontal	188	1.87	-	34.59	7.20	35.35
AV	5.3978G	47.97	54.00	-6.03	41.52	3	Horizontal	188	1.87	-	34.60	7.20	35.35
PK	5.4692G	60.02	68.20	-8.18	53.56	3	Horizontal	188	1.87	-	34.54	7.27	35.35
PK	5.7128G	113.49	Inf	-Inf	107.28	3	Horizontal	188	1.87	-	34.27	7.40	35.46
AV	5.7128G	100.75	Inf	-Inf	94.54	3	Horizontal	188	1.87	-	34.27	7.40	35.46
PK	5.8584G	61.34	68.20	-6.86	55.06	3	Horizontal	188	1.87	-	34.35	7.46	35.53

802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

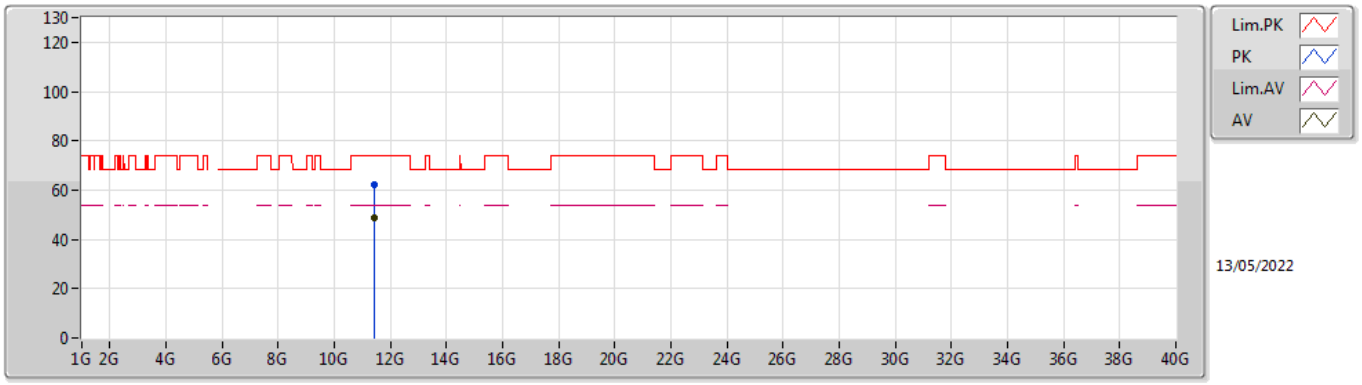


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.42G	61.94	74.00	-12.06	47.90	3	Vertical	186	2.44	-	38.84	10.71	35.51
AV	11.41994G	48.55	54.00	-5.45	34.51	3	Vertical	186	2.44	-	38.84	10.71	35.51

802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

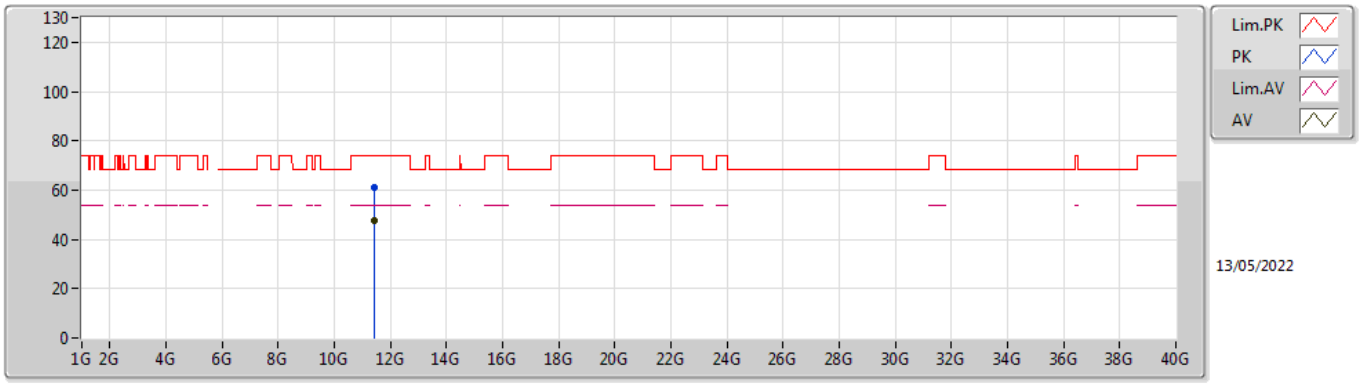


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.42G	61.17	74.00	-12.83	47.13	3	Horizontal	188	2.11	-	38.84	10.71	35.51
AV	11.41586G	47.36	54.00	-6.64	33.33	3	Horizontal	188	2.11	-	38.83	10.71	35.51

802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TnomVnom

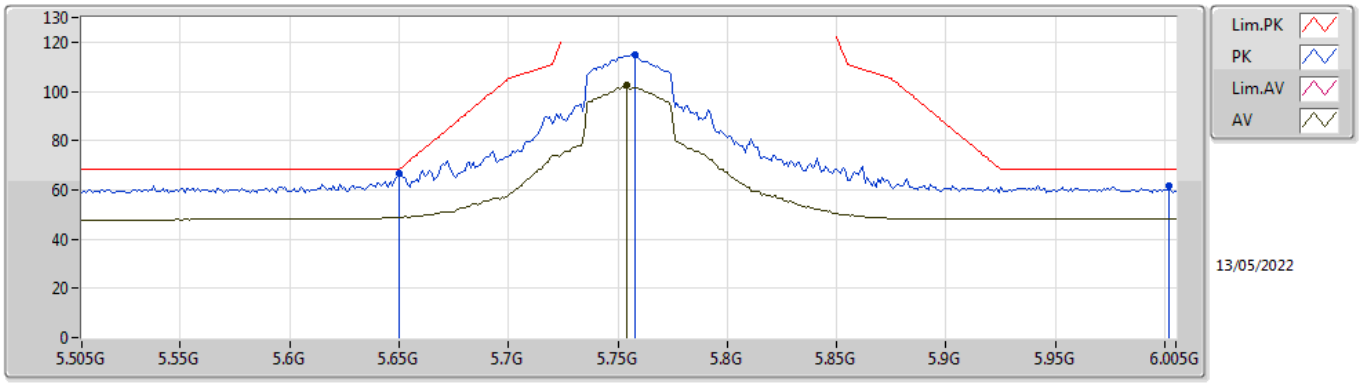


EUT X_2TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.65G	66.57	68.20	-1.63	60.10	3	Vertical	235	1.99	-	34.50	7.40	35.43
PK	5.758G	114.97	Inf	-Inf	108.85	3	Vertical	235	1.99	-	34.20	7.40	35.48
AV	5.754G	102.33	Inf	-Inf	96.21	3	Vertical	235	1.99	-	34.20	7.40	35.48
PK	6.002G	61.67	68.20	-6.53	54.87	3	Vertical	235	1.99	-	34.80	7.60	35.60

802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TnomVnom

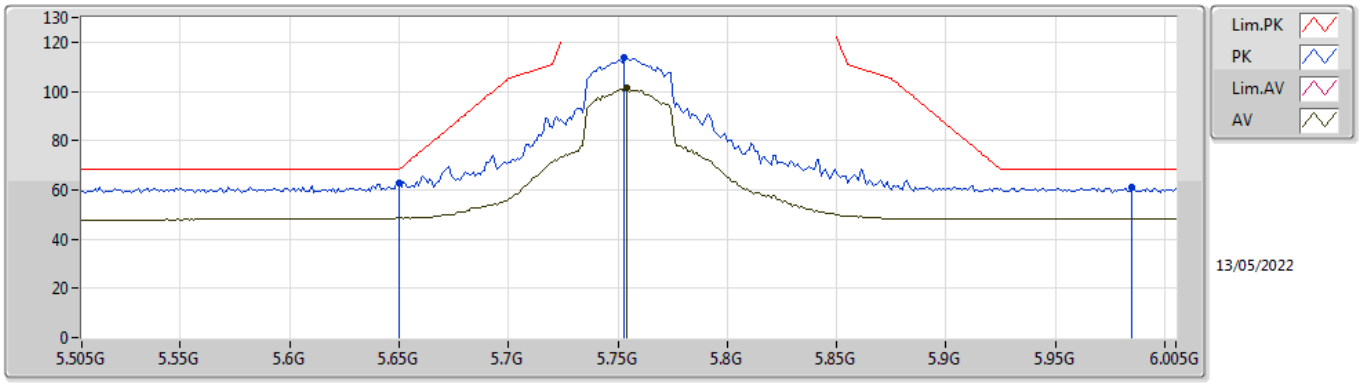


EUT X_2TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.65G	62.75	68.20	-5.45	56.28	3	Horizontal	183	1.84	-	34.50	7.40	35.43
PK	5.753G	114.03	Inf	-Inf	107.91	3	Horizontal	183	1.84	-	34.20	7.40	35.48
AV	5.754G	101.66	Inf	-Inf	95.54	3	Horizontal	183	1.84	-	34.20	7.40	35.48
PK	5.985G	60.98	68.20	-7.22	54.19	3	Horizontal	183	1.84	-	34.80	7.58	35.59

802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TnomVnom

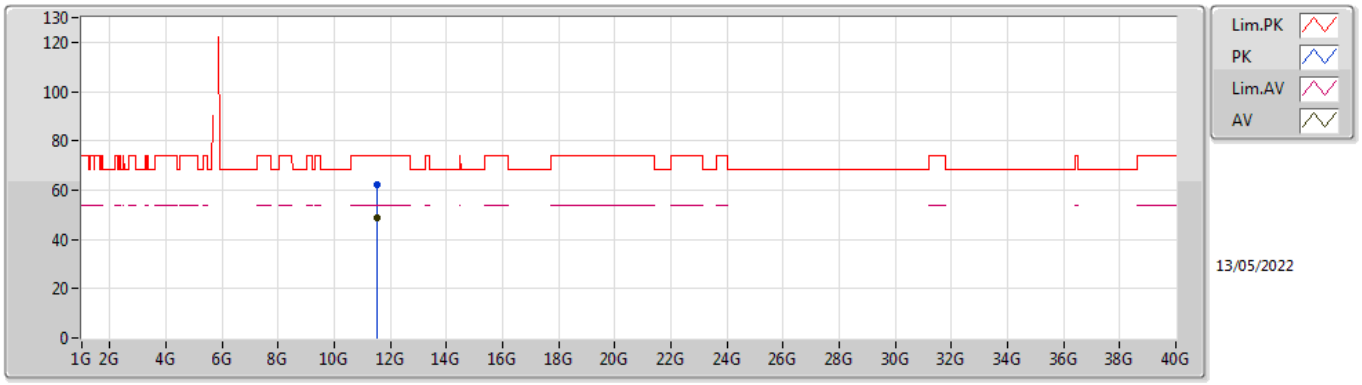


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.50886G	62.47	74.00	-11.53	48.30	3	Vertical	186	2.44	-	39.04	10.73	35.60
AV	11.50988G	48.97	54.00	-5.03	34.80	3	Vertical	186	2.44	-	39.04	10.73	35.60

802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TnomVnom

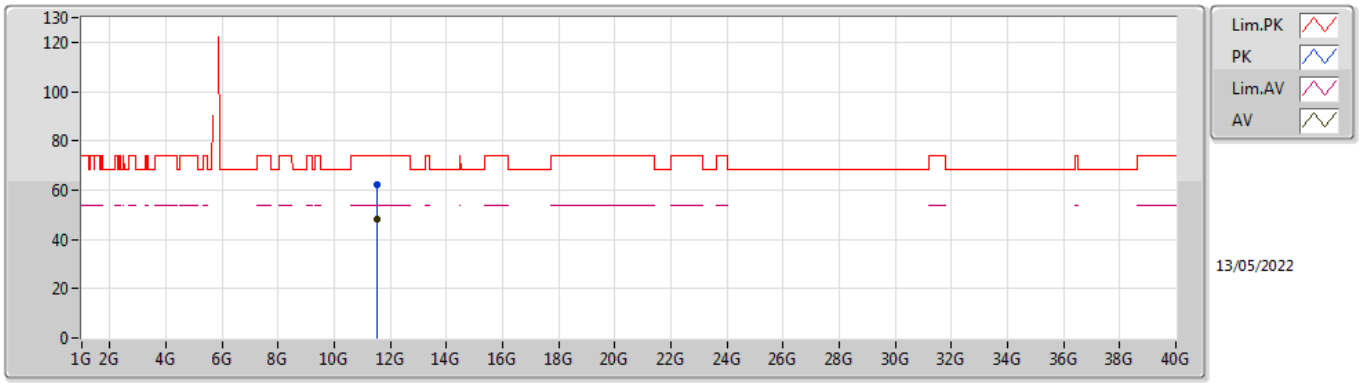


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.51072G	62.18	74.00	-11.82	48.01	3	Horizontal	193	2.09	-	39.04	10.73	35.60
AV	11.50592G	48.30	54.00	-5.70	34.15	3	Horizontal	193	2.09	-	39.02	10.73	35.60

802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TnomVnom

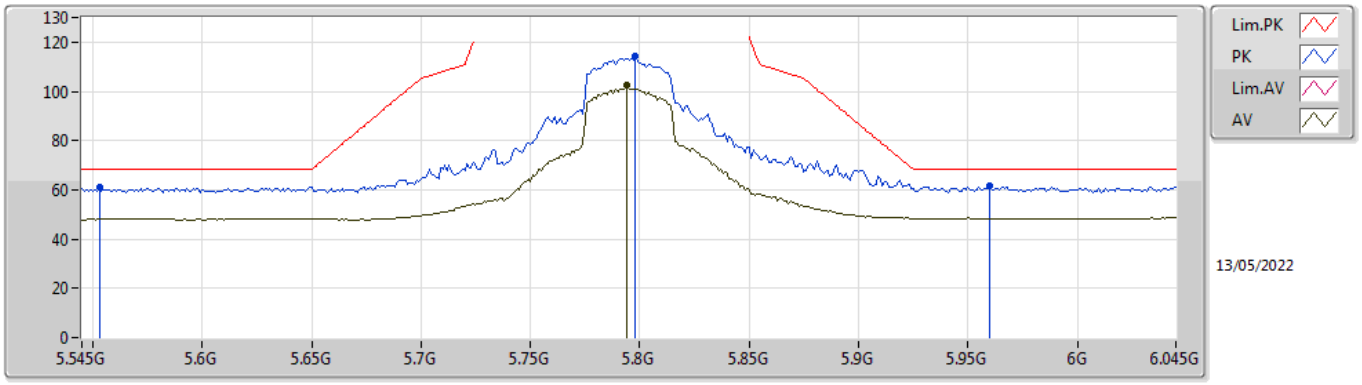


EUT X_2TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.553G	61.06	68.20	-7.14	54.49	3	Vertical	235	1.94	-	34.60	7.35	35.38
PK	5.798G	114.42	Inf	-Inf	108.32	3	Vertical	235	1.94	-	34.20	7.40	35.50
AV	5.794G	102.39	Inf	-Inf	96.29	3	Vertical	235	1.94	-	34.20	7.40	35.50
PK	5.96G	61.36	68.20	-6.84	54.58	3	Vertical	235	1.94	-	34.80	7.56	35.58

802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TnomVnom

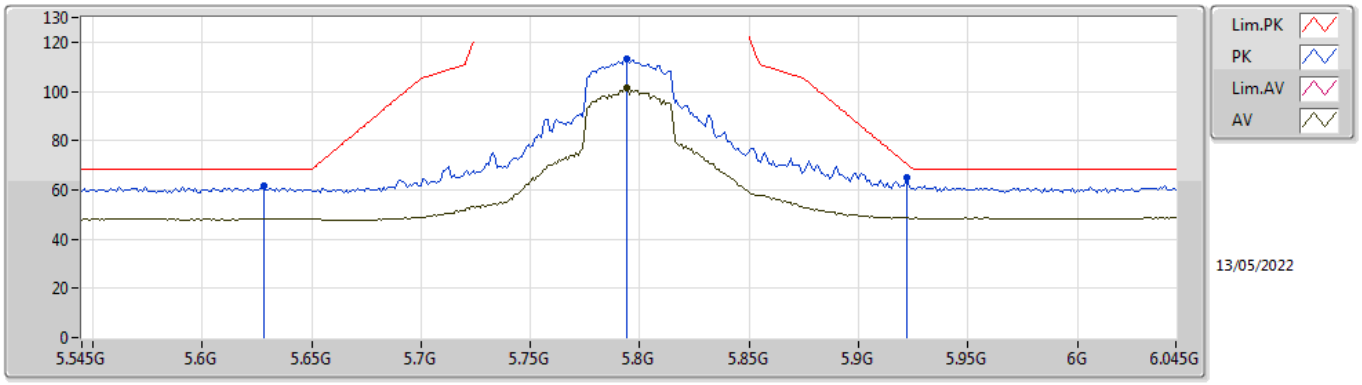


EUT X_2TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.628G	61.75	68.20	-6.45	55.22	3	Horizontal	187	1.80	-	34.54	7.40	35.41
PK	5.794G	113.31	Inf	-Inf	107.21	3	Horizontal	187	1.80	-	34.20	7.40	35.50
AV	5.794G	101.15	Inf	-Inf	95.05	3	Horizontal	187	1.80	-	34.20	7.40	35.50
PK	5.922G	64.83	70.42	-5.59	58.18	3	Horizontal	187	1.80	-	34.69	7.52	35.56

802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TnomVnom

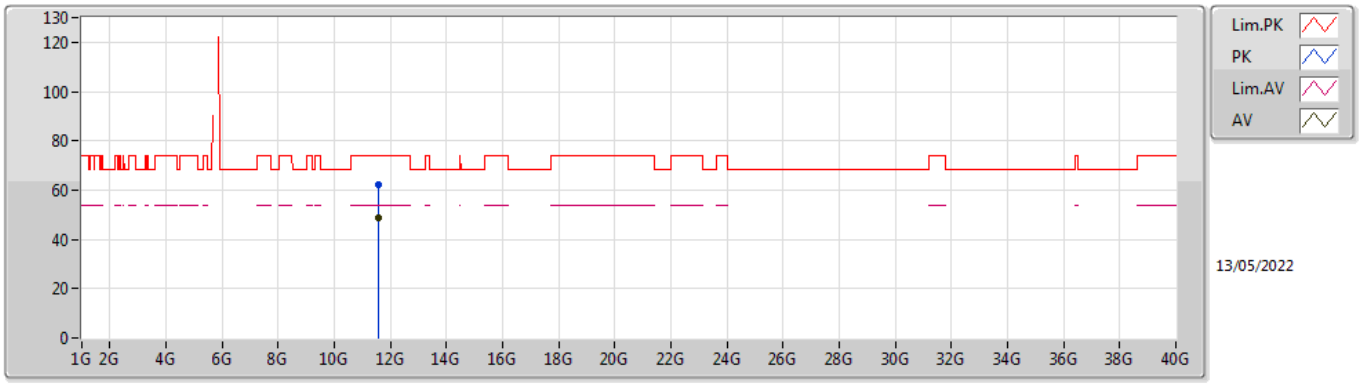


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.59522G	62.38	74.00	-11.62	47.84	3	Vertical	207	3.00	-	39.38	10.74	35.58
AV	11.5951G	48.80	54.00	-5.20	34.26	3	Vertical	207	3.00	-	39.38	10.74	35.58

802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TnomVnom

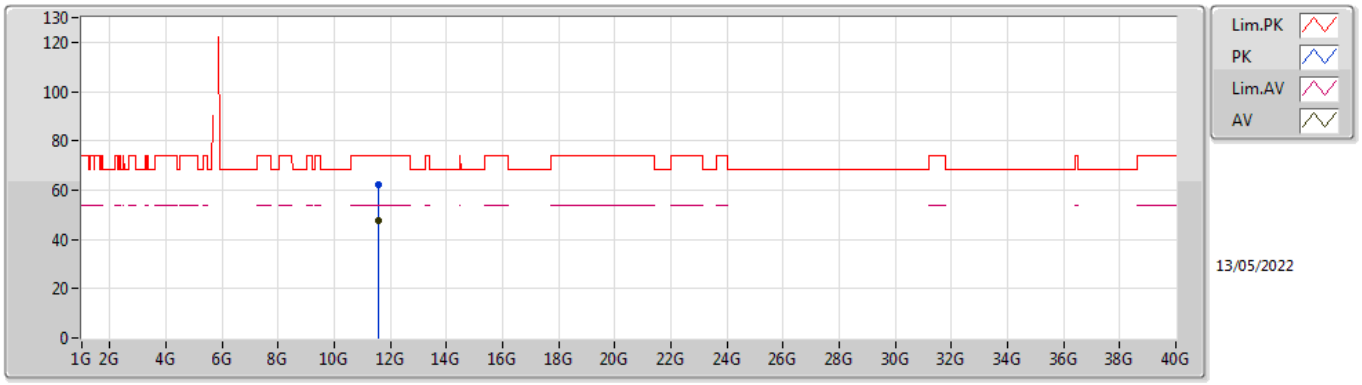


EUT X_2TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.59552G	62.04	74.00	-11.96	47.50	3	Horizontal	134	1.95	-	39.38	10.74	35.58
AV	11.59042G	47.44	54.00	-6.56	32.92	3	Horizontal	134	1.95	-	39.36	10.74	35.58

802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TnomVnom

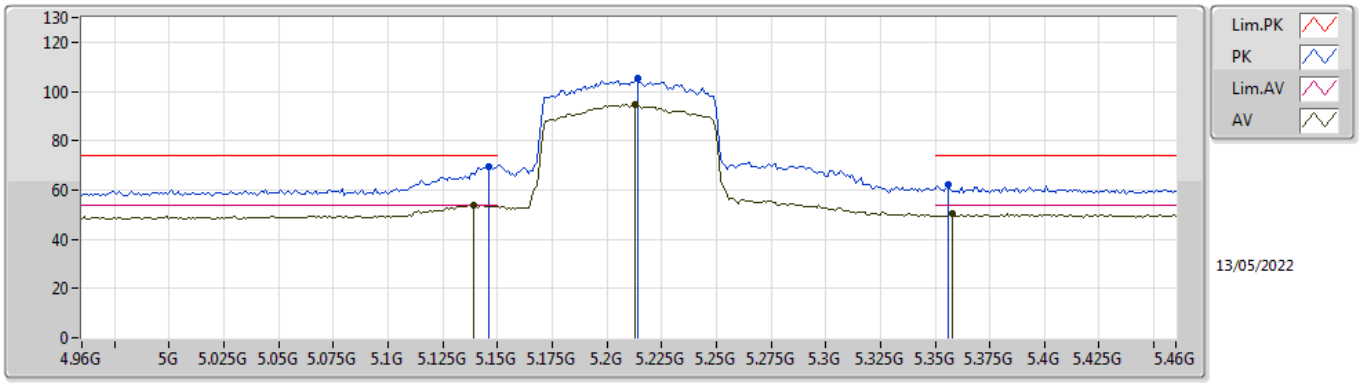


EUT X_2TX
Setting 13.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.146G	69.47	74.00	-4.53	63.65	3	Vertical	67	1.80	-	33.99	7.17	35.34
AV	5.139G	53.81	54.00	-0.19	48.00	3	Vertical	67	1.80	-	33.98	7.17	35.34
PK	5.214G	105.51	Inf	-Inf	99.39	3	Vertical	67	1.80	-	34.26	7.20	35.34
AV	5.213G	94.95	Inf	-Inf	88.84	3	Vertical	67	1.80	-	34.25	7.20	35.34
PK	5.356G	61.99	74.00	-12.01	55.62	3	Vertical	67	1.80	-	34.51	7.20	35.34
AV	5.358G	50.24	54.00	-3.76	43.86	3	Vertical	67	1.80	-	34.52	7.20	35.34

802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TnomVnom

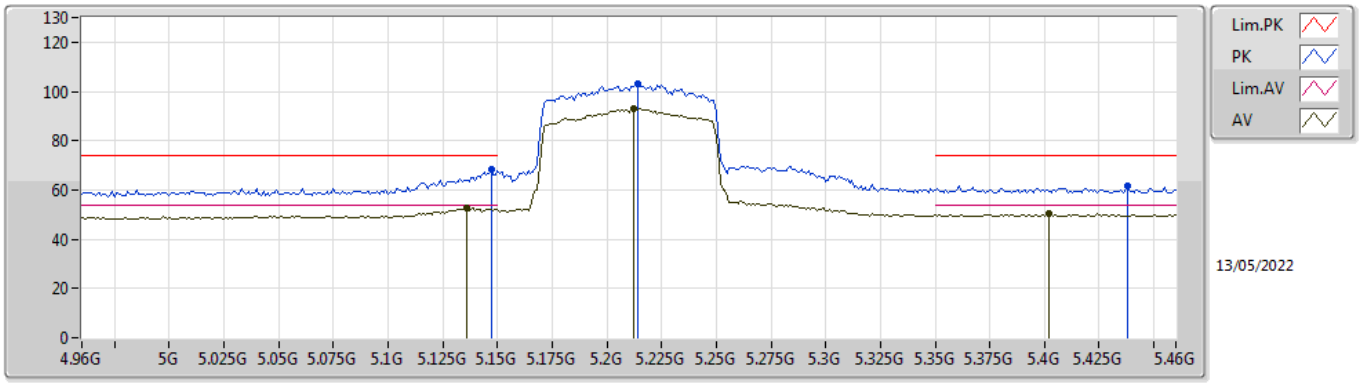


EUT X_2TX
Setting 13.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.147G	68.28	74.00	-5.72	62.46	3	Horizontal	164	2.00	-	33.99	7.17	35.34
AV	5.136G	52.65	54.00	-1.35	46.85	3	Horizontal	164	2.00	-	33.97	7.17	35.34
PK	5.214G	102.99	Inf	-Inf	96.87	3	Horizontal	164	2.00	-	34.26	7.20	35.34
AV	5.212G	92.91	Inf	-Inf	86.80	3	Horizontal	164	2.00	-	34.25	7.20	35.34
PK	5.438G	61.66	74.00	-12.34	55.25	3	Horizontal	164	2.00	-	34.52	7.24	35.35
AV	5.402G	50.29	54.00	-3.71	43.84	3	Horizontal	164	2.00	-	34.60	7.20	35.35

802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TnomVnom

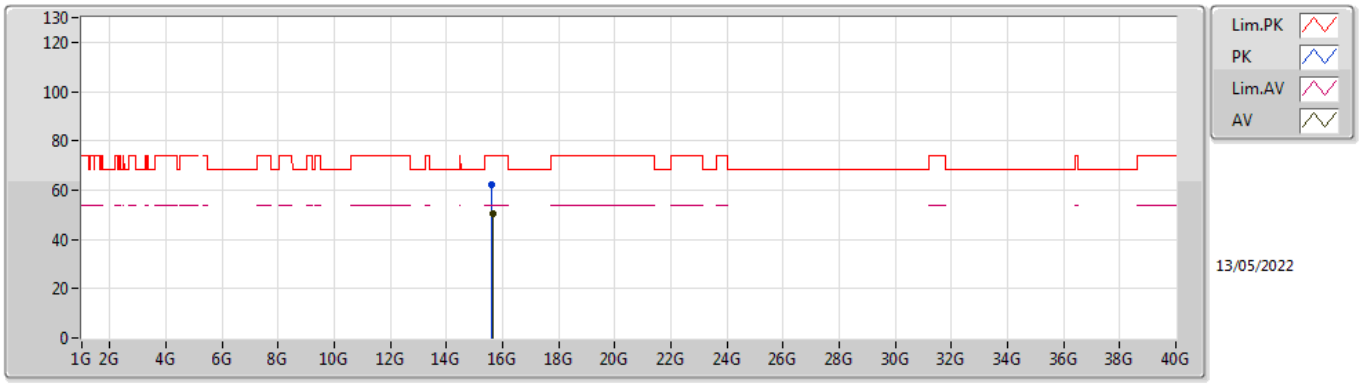


EUT X_2TX
Setting 13.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.62682G	62.08	74.00	-11.92	46.48	3	Vertical	354	2.56	-	37.87	13.21	35.48
AV	15.63762G	50.71	54.00	-3.29	35.17	3	Vertical	354	2.56	-	37.81	13.22	35.49

802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TnomVnom

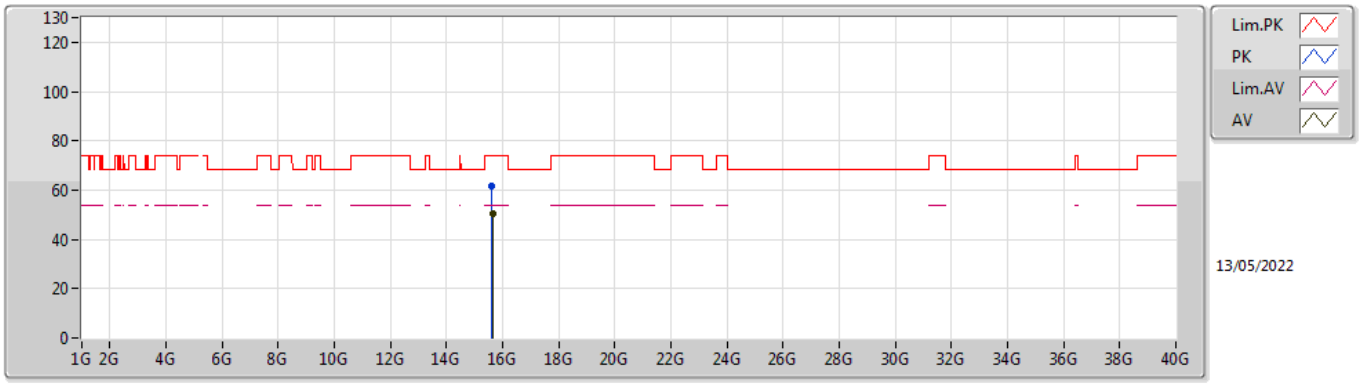


EUT X_2TX
Setting 13.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.62532G	61.69	74.00	-12.31	46.09	3	Horizontal	109	1.37	-	37.87	13.21	35.48
AV	15.63336G	50.69	54.00	-3.31	35.12	3	Horizontal	109	1.37	-	37.83	13.22	35.48

802.11ax HEW80_Nss1,(MCS0)_2TX

5290MHz_TnomVnom

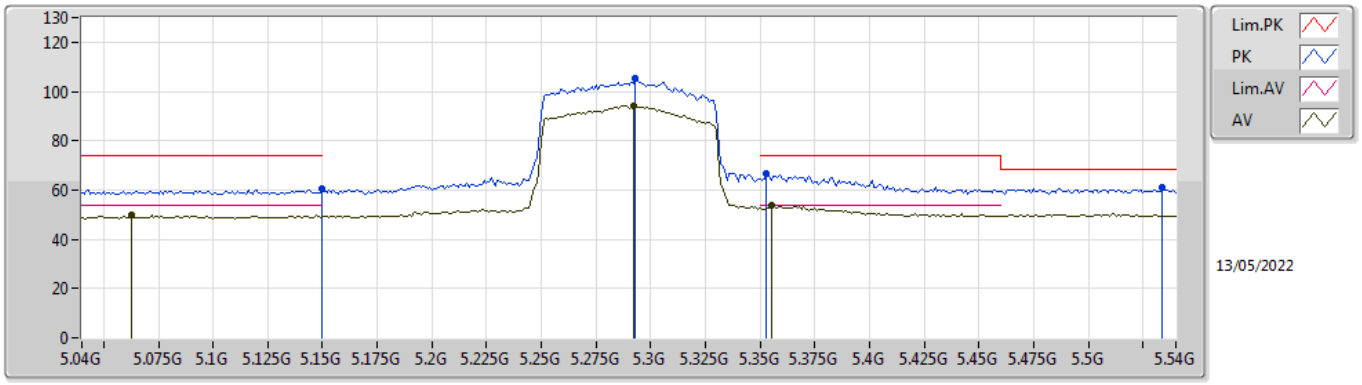


EUT X_2TX
Setting 12.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	60.67	74.00	-13.33	54.84	3	Vertical	68	1.85	-	34.00	7.17	35.34
AV	5.063G	49.85	54.00	-4.15	44.22	3	Vertical	68	1.85	-	33.83	7.13	35.33
PK	5.293G	105.15	Inf	-Inf	98.80	3	Vertical	68	1.85	-	34.49	7.20	35.34
AV	5.292G	94.19	Inf	-Inf	87.85	3	Vertical	68	1.85	-	34.48	7.20	35.34
PK	5.353G	66.55	74.00	-7.45	60.18	3	Vertical	68	1.85	-	34.51	7.20	35.34
AV	5.355G	53.63	54.00	-0.37	47.26	3	Vertical	68	1.85	-	34.51	7.20	35.34
PK	5.534G	60.86	68.20	-7.34	54.30	3	Vertical	68	1.85	-	34.60	7.33	35.37

802.11ax HEW80_Nss1,(MCS0)_2TX

5290MHz_TnomVnom

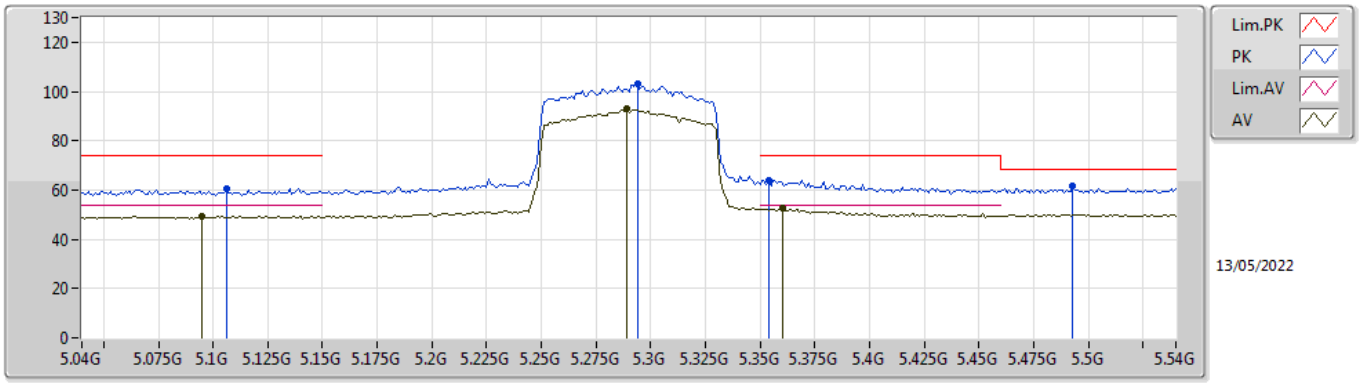


EUT X_2TX
Setting 12.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.106G	60.61	74.00	-13.39	54.88	3	Horizontal	162	1.89	-	33.91	7.15	35.33
AV	5.095G	49.46	54.00	-4.54	43.75	3	Horizontal	162	1.89	-	33.89	7.15	35.33
PK	5.294G	103.22	Inf	-Inf	96.87	3	Horizontal	162	1.89	-	34.49	7.20	35.34
AV	5.289G	92.89	Inf	-Inf	86.55	3	Horizontal	162	1.89	-	34.48	7.20	35.34
PK	5.354G	64.05	74.00	-9.95	57.68	3	Horizontal	162	1.89	-	34.51	7.20	35.34
AV	5.36G	52.41	54.00	-1.59	46.03	3	Horizontal	162	1.89	-	34.52	7.20	35.34
PK	5.493G	61.76	68.20	-6.44	55.23	3	Horizontal	162	1.89	-	34.59	7.29	35.35

802.11ax HEW80_Nss1,(MCS0)_2TX

5290MHz_TnomVnom

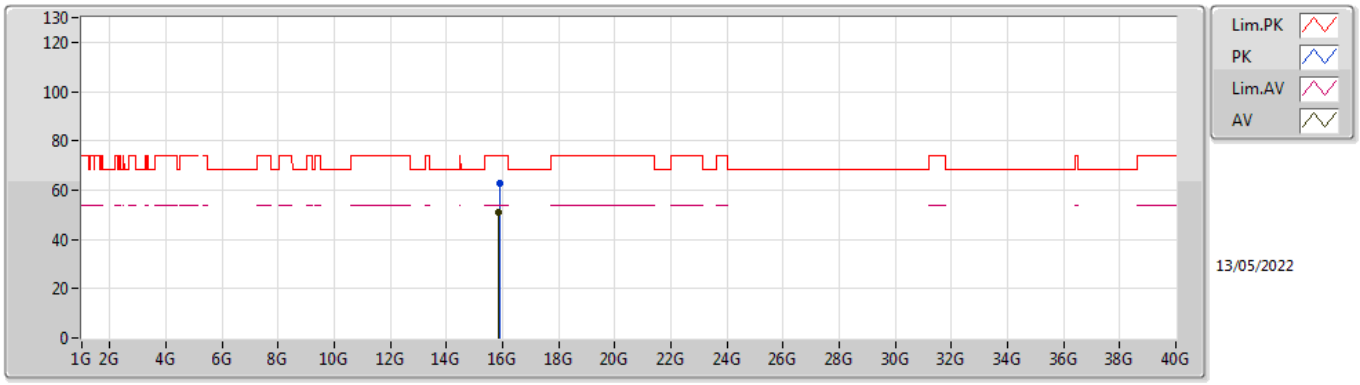


EUT X_2TX
Setting 12.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.88182G	62.91	74.00	-11.09	47.61	3	Vertical	50	2.94	-	37.65	13.34	35.69
AV	15.86652G	50.97	54.00	-3.03	35.62	3	Vertical	50	2.94	-	37.70	13.33	35.68

802.11ax HEW80_Nss1,(MCS0)_2TX

5290MHz_TnomVnom

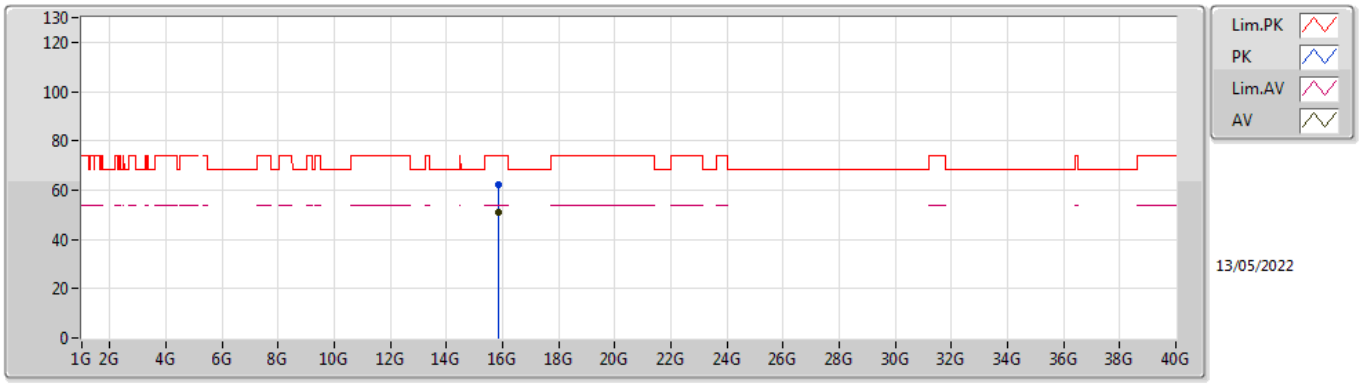


EUT X_2TX
Setting 12.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.85656G	62.47	74.00	-11.53	47.08	3	Horizontal	22	2.94	-	37.73	13.33	35.67
AV	15.86118G	50.95	54.00	-3.05	35.57	3	Horizontal	22	2.94	-	37.72	13.33	35.67

802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TnomVnom

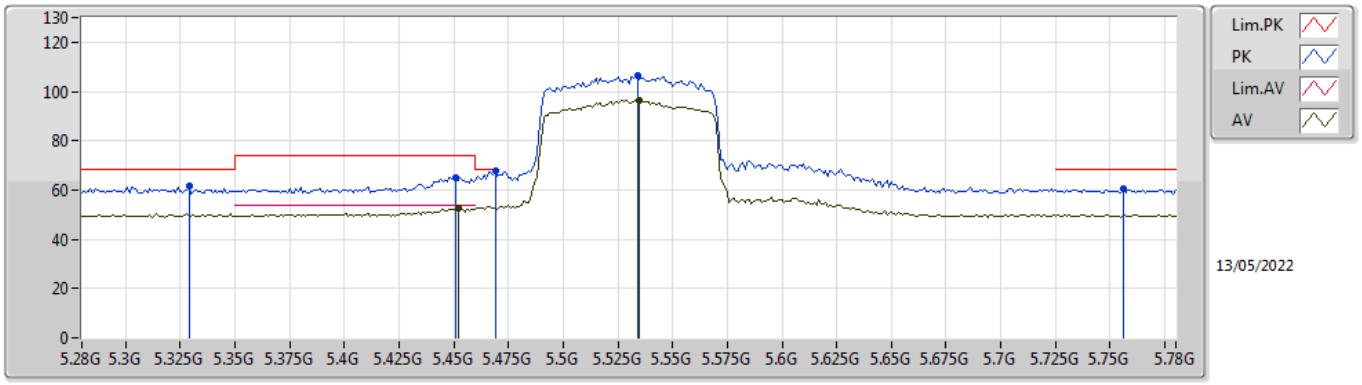


EUT X_2TX
Setting 13.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.329G	61.73	68.20	-6.47	55.37	3	Vertical	241	1.98	-	34.50	7.20	35.34
PK	5.451G	65.11	74.00	-8.89	58.71	3	Vertical	241	1.98	-	34.50	7.25	35.35
AV	5.452G	52.72	54.00	-1.28	46.32	3	Vertical	241	1.98	-	34.50	7.25	35.35
PK	5.469G	67.54	68.20	-0.66	61.08	3	Vertical	241	1.98	-	34.54	7.27	35.35
PK	5.534G	106.23	Inf	-Inf	99.67	3	Vertical	241	1.98	-	34.60	7.33	35.37
AV	5.535G	96.33	Inf	-Inf	89.76	3	Vertical	241	1.98	-	34.60	7.34	35.37
PK	5.756G	60.56	68.20	-7.64	54.44	3	Vertical	241	1.98	-	34.20	7.40	35.48

802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TnomVnom

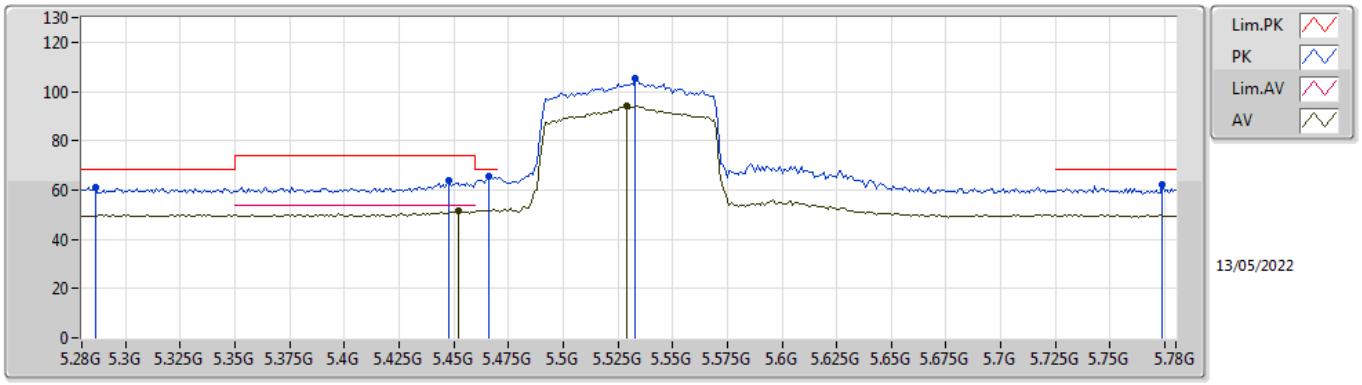


EUT X_2TX
Setting 13.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.286G	61.12	68.20	-7.08	54.79	3	Horizontal	186	1.76	-	34.47	7.20	35.34
PK	5.448G	63.74	74.00	-10.26	57.34	3	Horizontal	186	1.76	-	34.50	7.25	35.35
AV	5.452G	51.45	54.00	-2.55	45.05	3	Horizontal	186	1.76	-	34.50	7.25	35.35
PK	5.466G	65.47	68.20	-2.73	59.02	3	Horizontal	186	1.76	-	34.53	7.27	35.35
PK	5.533G	105.16	Inf	-Inf	98.60	3	Horizontal	186	1.76	-	34.60	7.33	35.37
AV	5.529G	93.92	Inf	-Inf	87.35	3	Horizontal	186	1.76	-	34.60	7.33	35.36
PK	5.774G	62.38	68.20	-5.82	56.27	3	Horizontal	186	1.76	-	34.20	7.40	35.49

802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TnomVnom

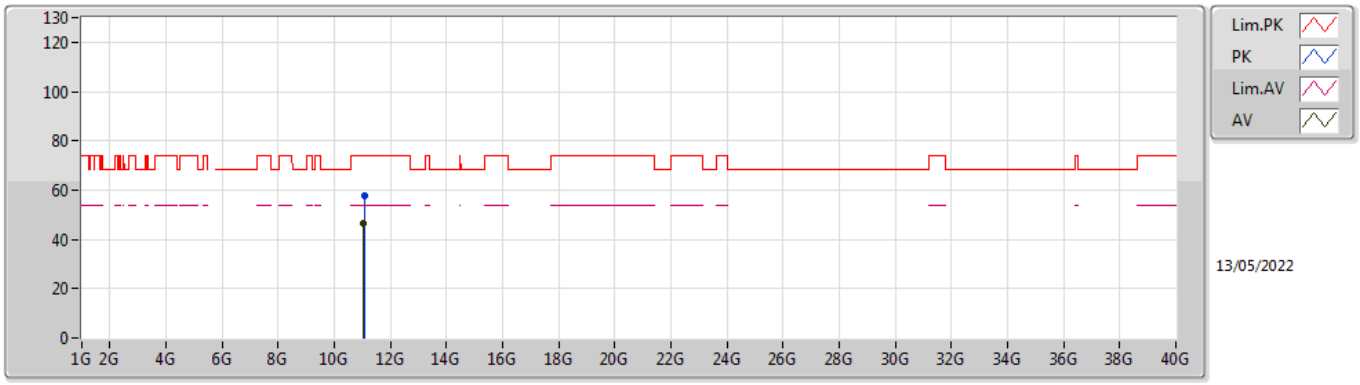


EUT X_2TX
Setting 13.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.06948G	57.65	74.00	-16.35	43.64	3	Vertical	292	1.27	-	38.47	10.66	35.12
AV	11.05418G	46.39	54.00	-7.61	32.38	3	Vertical	292	1.27	-	38.45	10.66	35.10

802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TnomVnom

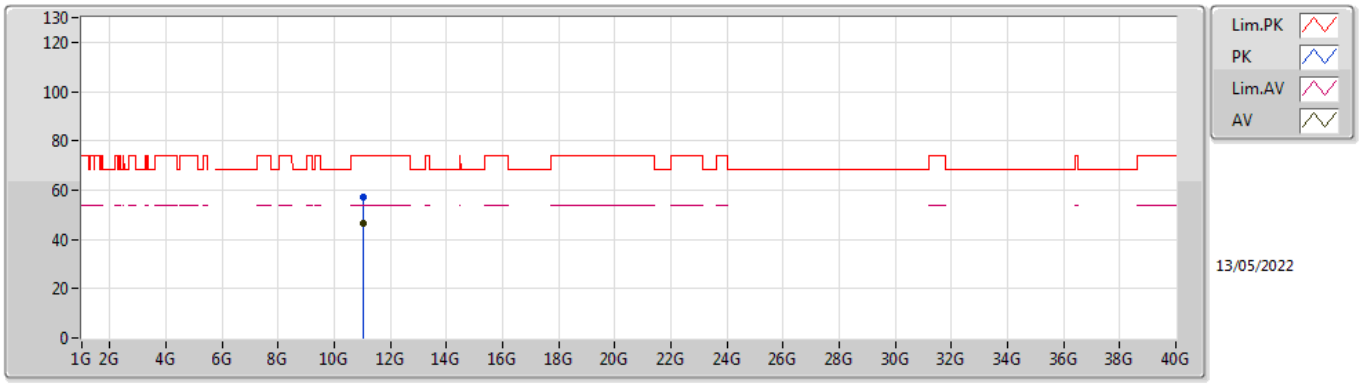


EUT X_2TX
Setting 13.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0456G	57.40	74.00	-16.60	43.38	3	Horizontal	209	2.54	-	38.45	10.66	35.09
AV	11.04818G	46.60	54.00	-7.40	32.58	3	Horizontal	209	2.54	-	38.45	10.66	35.09

802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TnomVnom

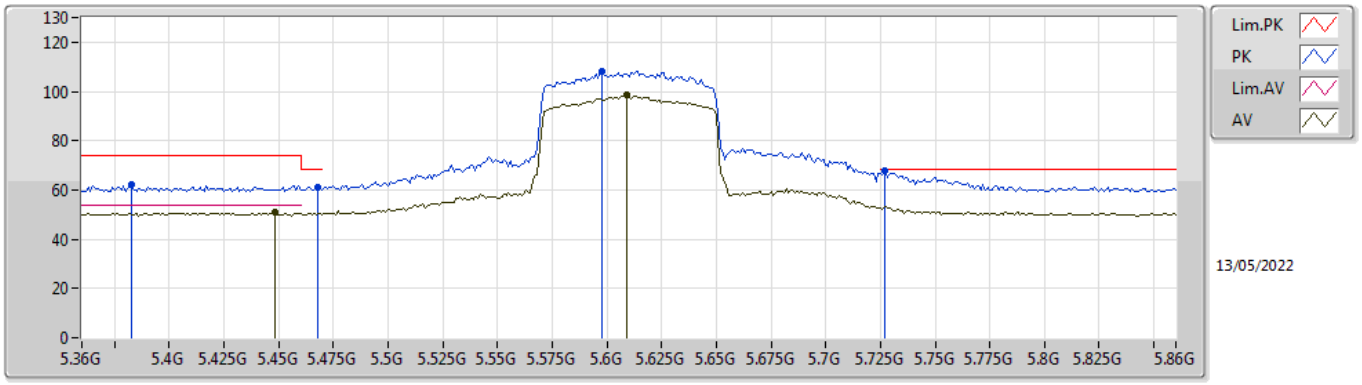


EUT X_2TX
Setting 14.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.383G	62.43	74.00	-11.57	56.01	3	Vertical	239	1.91	-	34.57	7.20	35.35
PK	5.468G	61.26	68.20	-6.94	54.80	3	Vertical	239	1.91	-	34.54	7.27	35.35
AV	5.448G	51.00	54.00	-3.00	44.60	3	Vertical	239	1.91	-	34.50	7.25	35.35
PK	5.598G	108.42	Inf	-Inf	101.82	3	Vertical	239	1.91	-	34.60	7.40	35.40
AV	5.609G	98.35	Inf	-Inf	91.77	3	Vertical	239	1.91	-	34.58	7.40	35.40
PK	5.727G	68.06	68.20	-0.14	61.87	3	Vertical	239	1.91	-	34.25	7.40	35.46

802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TnomVnom

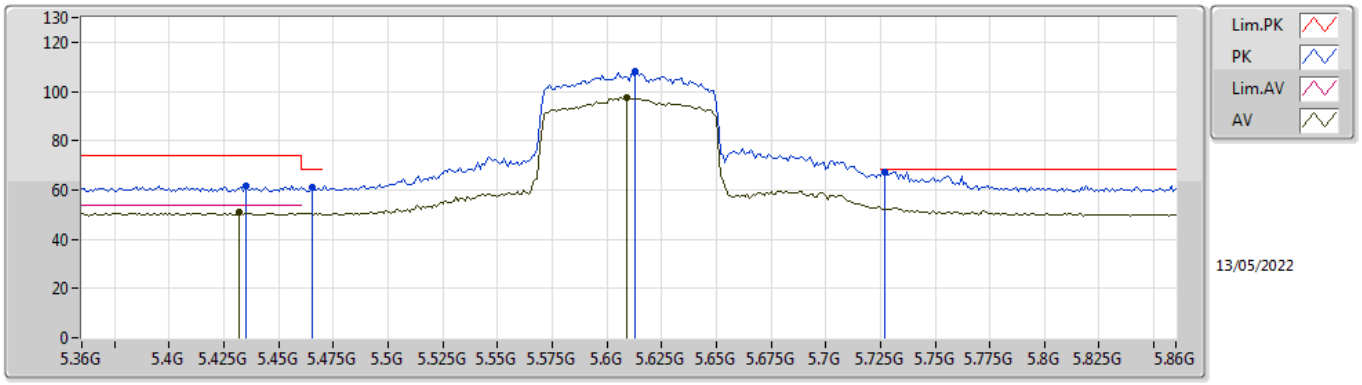


EUT X_2TX
Setting 14.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.435G	61.69	74.00	-12.31	55.27	3	Horizontal	193	2.10	-	34.53	7.24	35.35
AV	5.432G	50.74	54.00	-3.26	44.32	3	Horizontal	193	2.10	-	34.54	7.23	35.35
PK	5.465G	60.96	68.20	-7.24	54.52	3	Horizontal	193	2.10	-	34.53	7.26	35.35
PK	5.613G	108.04	Inf	-Inf	101.48	3	Horizontal	193	2.10	-	34.57	7.40	35.41
AV	5.609G	97.60	Inf	-Inf	91.02	3	Horizontal	193	2.10	-	34.58	7.40	35.40
PK	5.727G	67.26	68.20	-0.94	61.07	3	Horizontal	193	2.10	-	34.25	7.40	35.46

802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TnomVnom

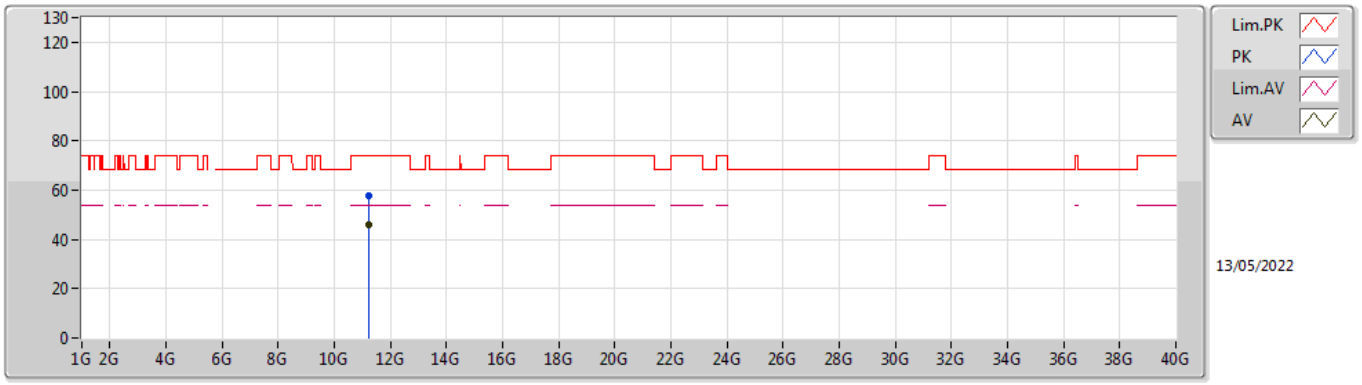


EUT X_2TX
Setting 14.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.23362G	57.99	74.00	-16.01	43.97	3	Vertical	360	1.09	-	38.63	10.69	35.30
AV	11.22408G	45.67	54.00	-8.33	31.66	3	Vertical	360	1.09	-	38.62	10.68	35.29

802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TnomVnom

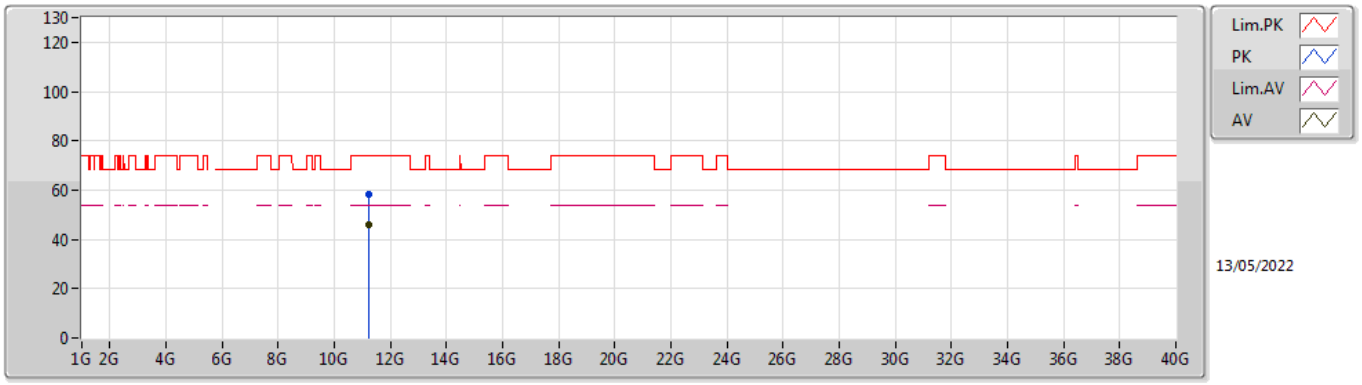


EUT X_2TX
Setting 14.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.2113G	58.04	74.00	-15.96	44.03	3	Horizontal	353	1.94	-	38.61	10.68	35.28
AV	11.23068G	45.71	54.00	-8.29	31.70	3	Horizontal	353	1.94	-	38.63	10.68	35.30

802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

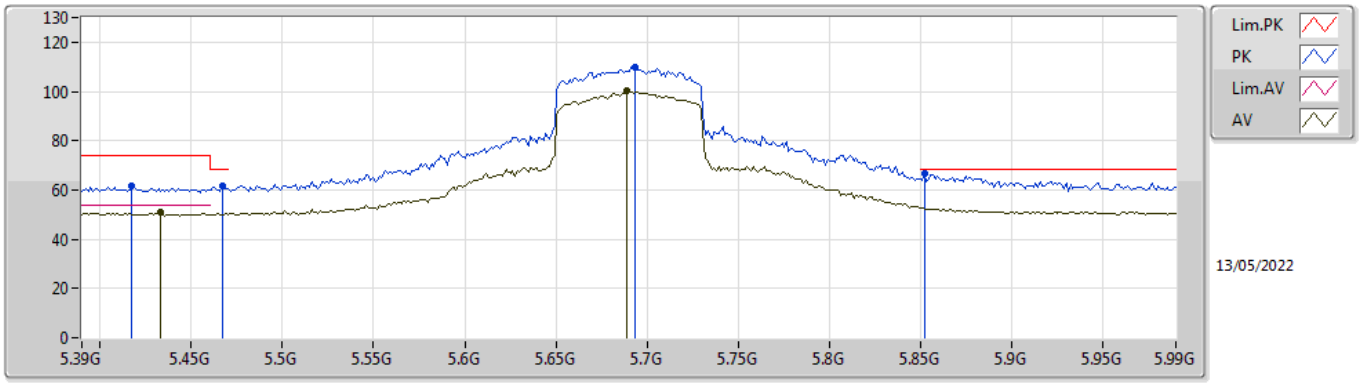


EUT X_2TX
Setting 16.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4176G	61.39	74.00	-12.61	54.96	3	Vertical	325	1.80	-	34.56	7.22	35.35
AV	5.4332G	50.95	54.00	-3.05	44.54	3	Vertical	325	1.80	-	34.53	7.23	35.35
PK	5.4668G	61.66	68.20	-6.54	55.21	3	Vertical	325	1.80	-	34.53	7.27	35.35
PK	5.6936G	110.06	Inf	-Inf	103.78	3	Vertical	325	1.80	-	34.33	7.40	35.45
AV	5.6888G	100.03	Inf	-Inf	93.73	3	Vertical	325	1.80	-	34.34	7.40	35.44
PK	5.852G	66.42	68.20	-1.78	60.19	3	Vertical	325	1.80	-	34.31	7.45	35.53

802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

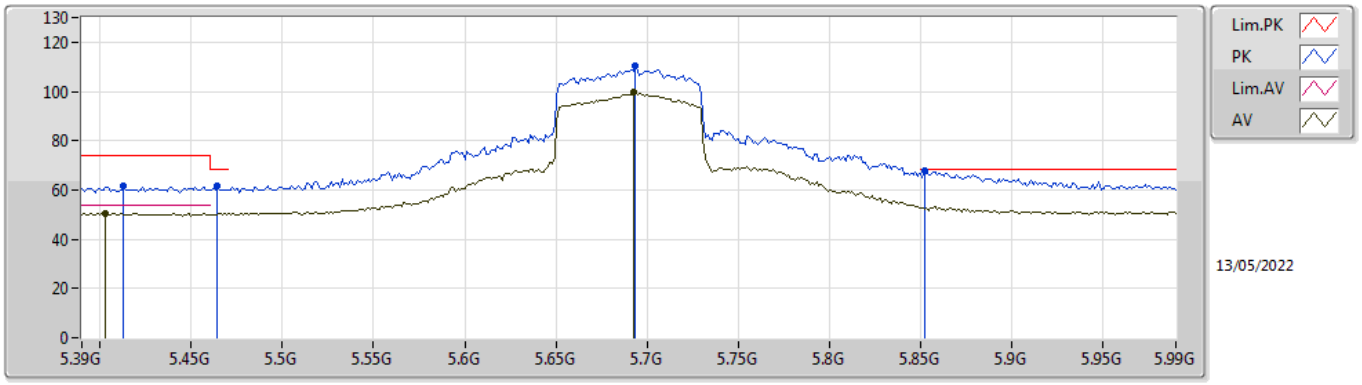


EUT X_2TX
Setting 16.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4128G	61.36	74.00	-12.64	54.93	3	Horizontal	184	1.95	-	34.57	7.21	35.35
AV	5.4032G	50.62	54.00	-3.38	44.18	3	Horizontal	184	1.95	-	34.59	7.20	35.35
PK	5.4644G	61.37	68.20	-6.83	54.93	3	Horizontal	184	1.95	-	34.53	7.26	35.35
PK	5.6936G	110.28	Inf	-Inf	104.00	3	Horizontal	184	1.95	-	34.33	7.40	35.45
AV	5.6924G	99.74	Inf	-Inf	93.46	3	Horizontal	184	1.95	-	34.33	7.40	35.45
PK	5.852G	67.98	68.20	-0.22	61.75	3	Horizontal	184	1.95	-	34.31	7.45	35.53

802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

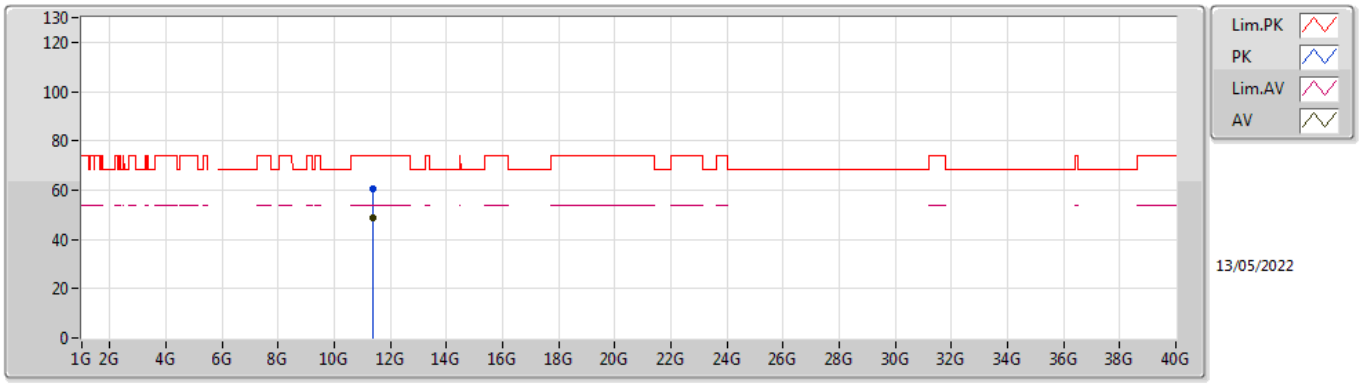


EUT X_2TX
Setting 16.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.38504G	60.69	74.00	-13.31	46.66	3	Vertical	186	2.46	-	38.79	10.71	35.47
AV	11.38924G	49.01	54.00	-4.99	34.99	3	Vertical	186	2.46	-	38.79	10.71	35.48

802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

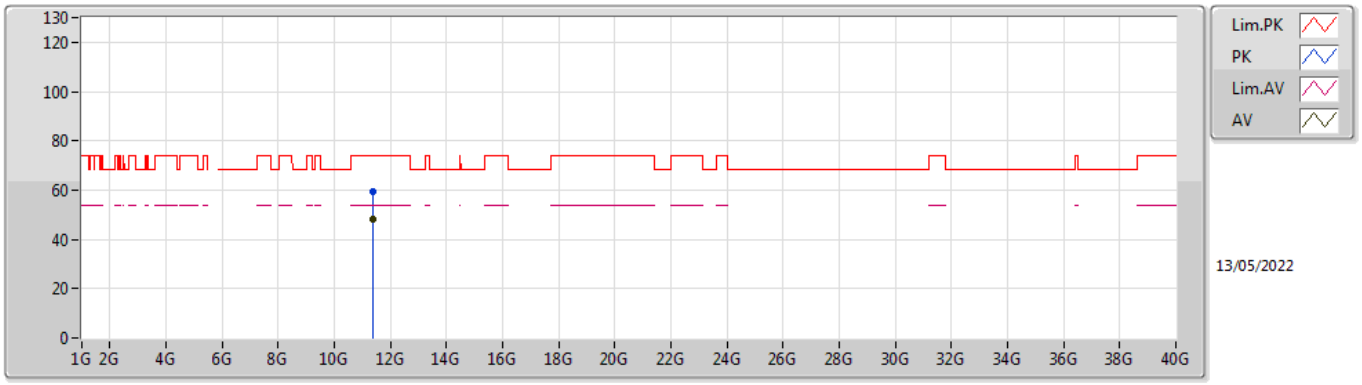


EUT X_2TX
Setting 16.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.38024G	59.33	74.00	-14.67	45.31	3	Horizontal	190	2.12	-	38.78	10.71	35.47
AV	11.3755G	48.35	54.00	-5.65	34.32	3	Horizontal	190	2.12	-	38.78	10.71	35.46

802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TnomVnom

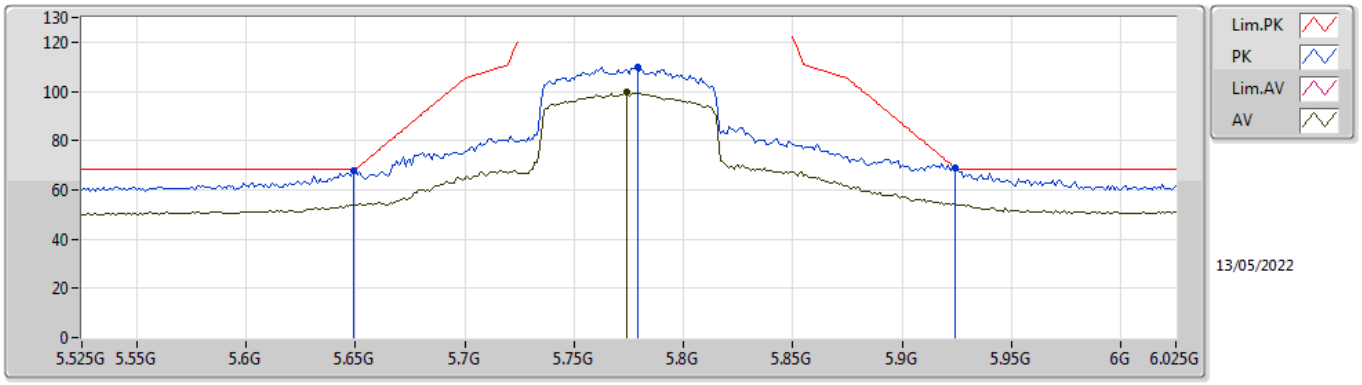


EUT X_2TX
Setting 16
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.649G	68.03	68.20	-0.17	61.55	3	Vertical	325	1.97	-	34.50	7.40	35.42
PK	5.779G	109.68	Inf	-Inf	103.57	3	Vertical	325	1.97	-	34.20	7.40	35.49
AV	5.774G	99.99	Inf	-Inf	93.88	3	Vertical	325	1.97	-	34.20	7.40	35.49
PK	5.924G	68.83	68.94	-0.11	62.17	3	Vertical	325	1.97	-	34.70	7.52	35.56

802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TnomVnom

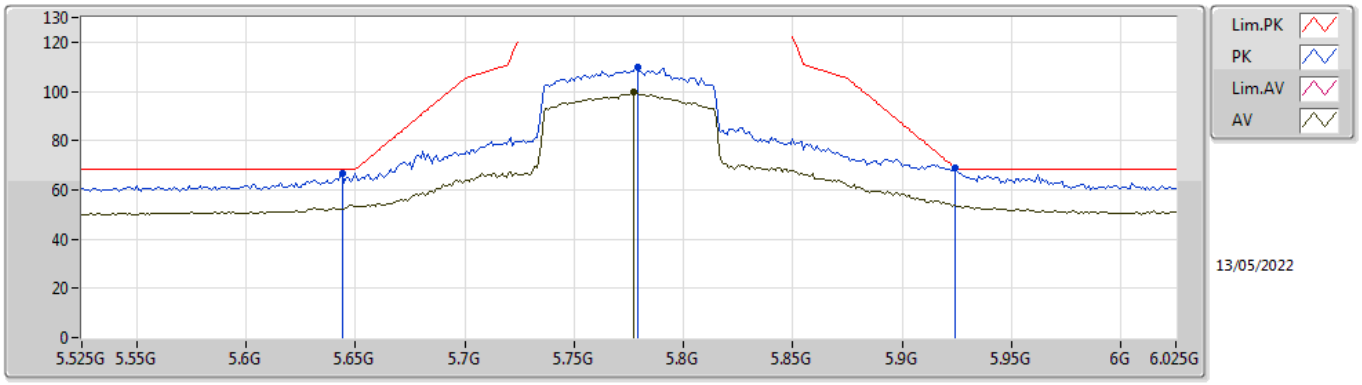


EUT X_2TX
Setting 16
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.644G	66.67	68.20	-1.53	60.18	3	Horizontal	337	2.01	-	34.51	7.40	35.42
PK	5.779G	109.92	Inf	-Inf	103.81	3	Horizontal	337	2.01	-	34.20	7.40	35.49
AV	5.777G	99.59	Inf	-Inf	93.48	3	Horizontal	337	2.01	-	34.20	7.40	35.49
PK	5.924G	68.70	68.94	-0.24	62.04	3	Horizontal	337	2.01	-	34.70	7.52	35.56

802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TnomVnom

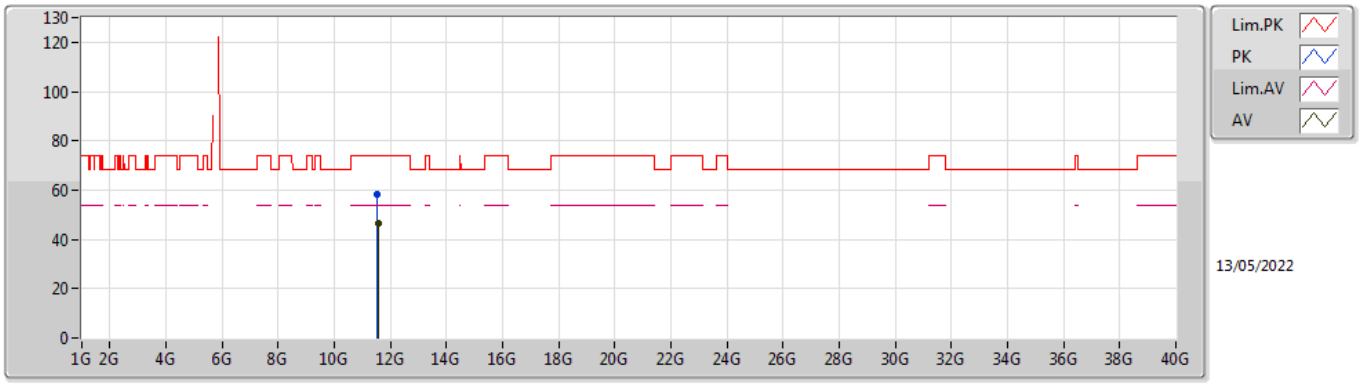


EUT X_2TX
Setting 16
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.53554G	58.33	74.00	-15.67	44.05	3	Vertical	96	1.49	-	39.14	10.73	35.59
AV	11.56338G	46.63	54.00	-7.37	32.24	3	Vertical	96	1.49	-	39.25	10.73	35.59

802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TnomVnom

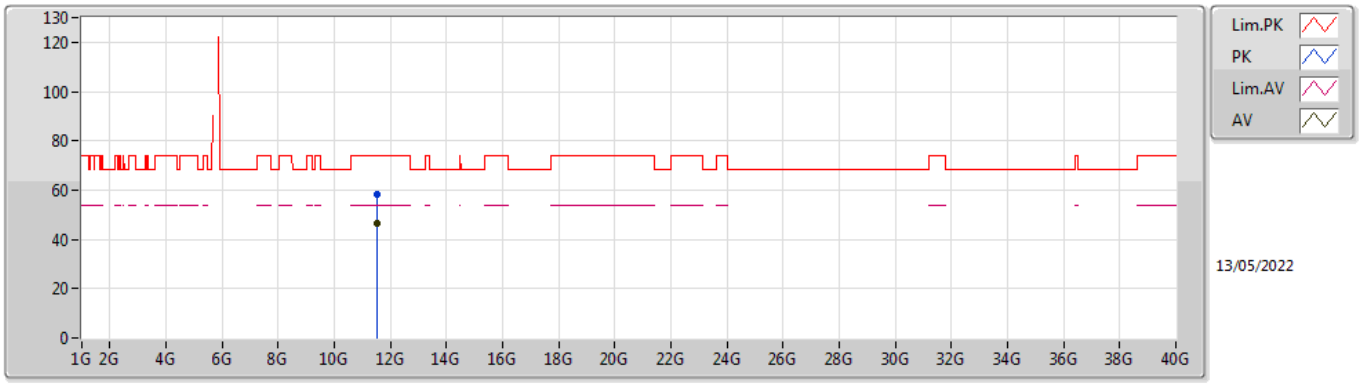


EUT X_2TX
Setting 16
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.54676G	58.53	74.00	-15.47	44.20	3	Horizontal	56	2.06	-	39.19	10.73	35.59
AV	11.53656G	46.70	54.00	-7.30	32.41	3	Horizontal	56	2.06	-	39.15	10.73	35.59

802.11ax HEW160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

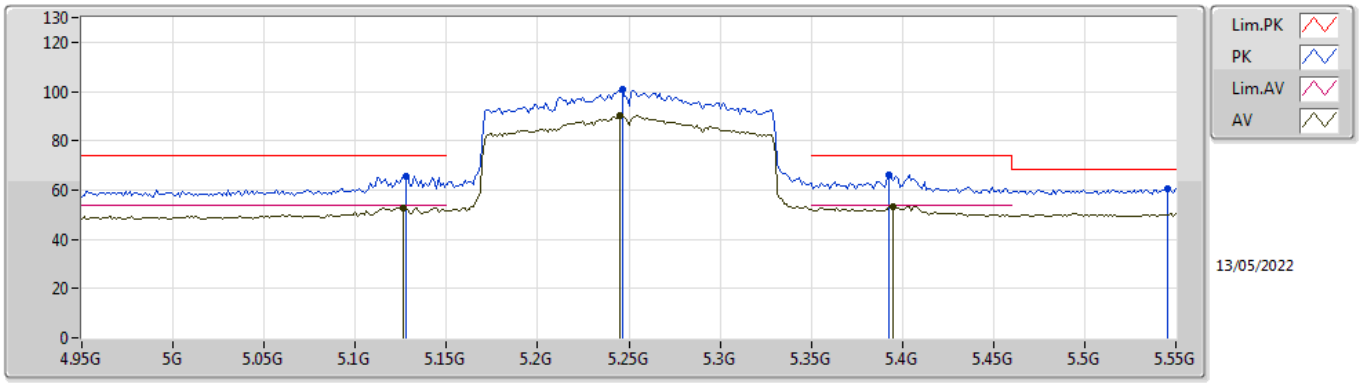


EUT X_2TX
Setting 9.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1276G	65.84	74.00	-8.16	60.06	3	Vertical	70	1.94	-	33.96	7.16	35.34
AV	5.1264G	52.95	54.00	-1.05	47.18	3	Vertical	70	1.94	-	33.95	7.16	35.34
PK	5.2464G	100.94	Inf	-Inf	94.69	3	Vertical	70	1.94	-	34.39	7.20	35.34
AV	5.2452G	90.13	Inf	-Inf	83.89	3	Vertical	70	1.94	-	34.38	7.20	35.34
PK	5.3928G	66.37	74.00	-7.63	59.93	3	Vertical	70	1.94	-	34.59	7.20	35.35
AV	5.3952G	53.44	54.00	-0.56	47.00	3	Vertical	70	1.94	-	34.59	7.20	35.35
PK	5.5452G	60.50	68.20	-7.70	53.92	3	Vertical	70	1.94	-	34.60	7.35	35.37

802.11ax HEW160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

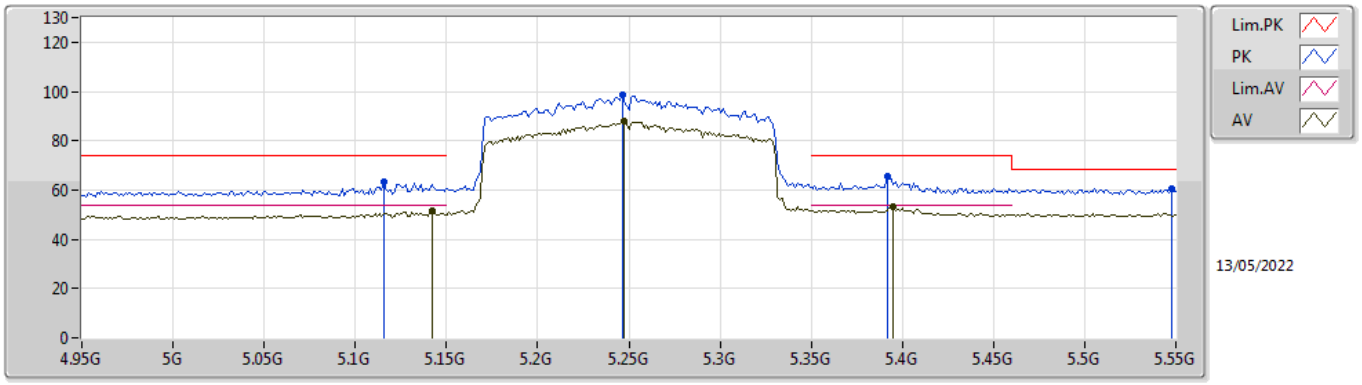


EUT X_2TX
Setting 9.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1156G	63.12	74.00	-10.88	57.36	3	Horizontal	163	2.11	-	33.93	7.16	35.33
AV	5.142G	51.73	54.00	-2.27	45.92	3	Horizontal	163	2.11	-	33.98	7.17	35.34
PK	5.2464G	98.50	Inf	-Inf	92.25	3	Horizontal	163	2.11	-	34.39	7.20	35.34
AV	5.2476G	87.82	Inf	-Inf	81.57	3	Horizontal	163	2.11	-	34.39	7.20	35.34
PK	5.3916G	65.37	74.00	-8.63	58.94	3	Horizontal	163	2.11	-	34.58	7.20	35.35
AV	5.3952G	53.39	54.00	-0.61	46.95	3	Horizontal	163	2.11	-	34.59	7.20	35.35
PK	5.5476G	60.64	68.20	-7.56	54.06	3	Horizontal	163	2.11	-	34.60	7.35	35.37

802.11ax HEW160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

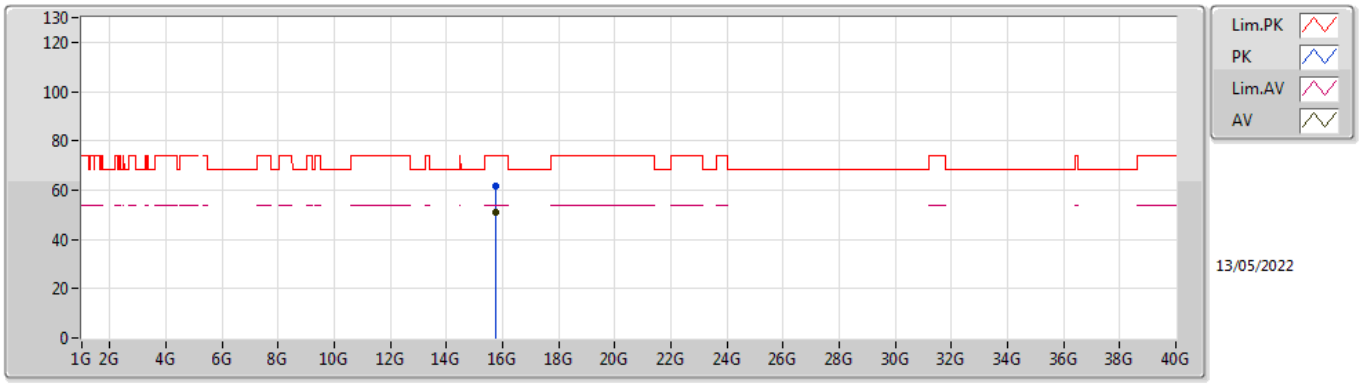


EUT X_2TX
Setting 9.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.74448G	61.69	74.00	-12.31	46.32	3	Vertical	159	2.52	-	37.68	13.27	35.58
AV	15.74496G	50.82	54.00	-3.18	35.45	3	Vertical	159	2.52	-	37.68	13.27	35.58

802.11ax HEW160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

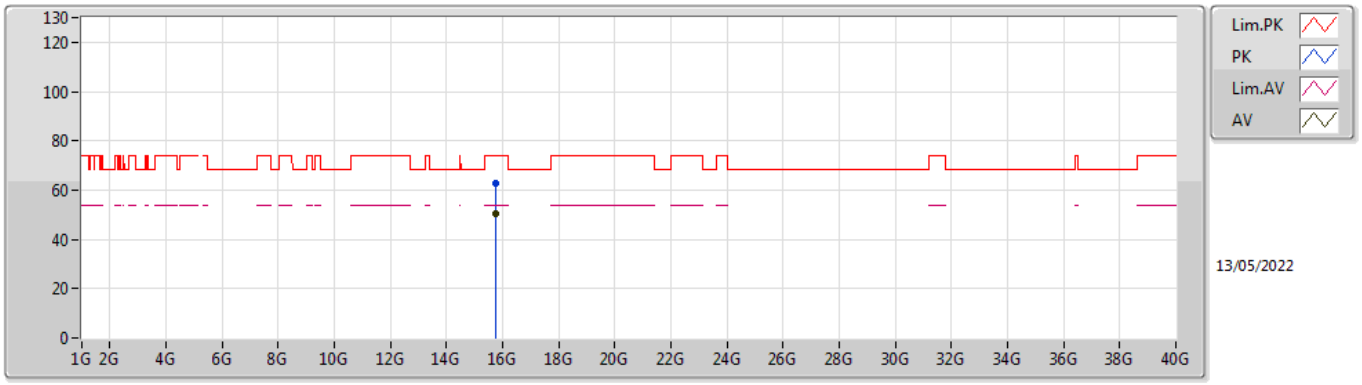


EUT X_2TX
Setting 9.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.75048G	62.92	74.00	-11.08	47.52	3	Horizontal	332	1.23	-	37.70	13.28	35.58
AV	15.74844G	50.53	54.00	-3.47	35.15	3	Horizontal	332	1.23	-	37.69	13.27	35.58

802.11ax HEW160_Nss1,(MCS0)_2TX

5570MHz_TnomVnom

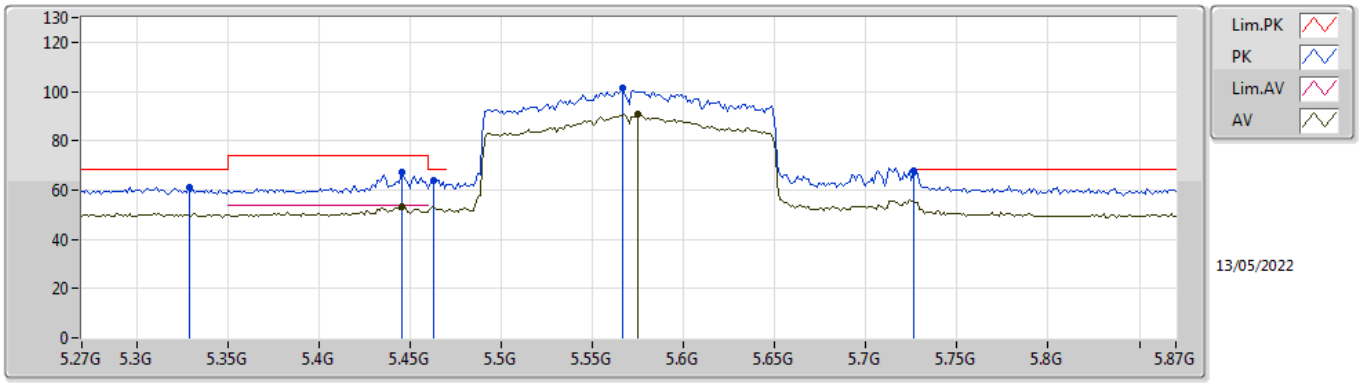


EUT X_2TX
Setting 9.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3288G	60.93	68.20	-7.27	54.57	3	Vertical	326	1.90	-	34.50	7.20	35.34
PK	5.4452G	67.09	74.00	-6.91	60.68	3	Vertical	326	1.90	-	34.51	7.25	35.35
AV	5.4452G	53.29	54.00	-0.71	46.88	3	Vertical	326	1.90	-	34.51	7.25	35.35
PK	5.4632G	64.00	68.20	-4.20	57.56	3	Vertical	326	1.90	-	34.53	7.26	35.35
PK	5.5664G	101.50	Inf	-Inf	94.91	3	Vertical	326	1.90	-	34.60	7.37	35.38
AV	5.5748G	90.70	Inf	-Inf	84.12	3	Vertical	326	1.90	-	34.60	7.37	35.39
PK	5.726G	67.84	68.20	-0.36	61.65	3	Vertical	326	1.90	-	34.25	7.40	35.46

802.11ax HEW160_Nss1,(MCS0)_2TX

5570MHz_TnomVnom

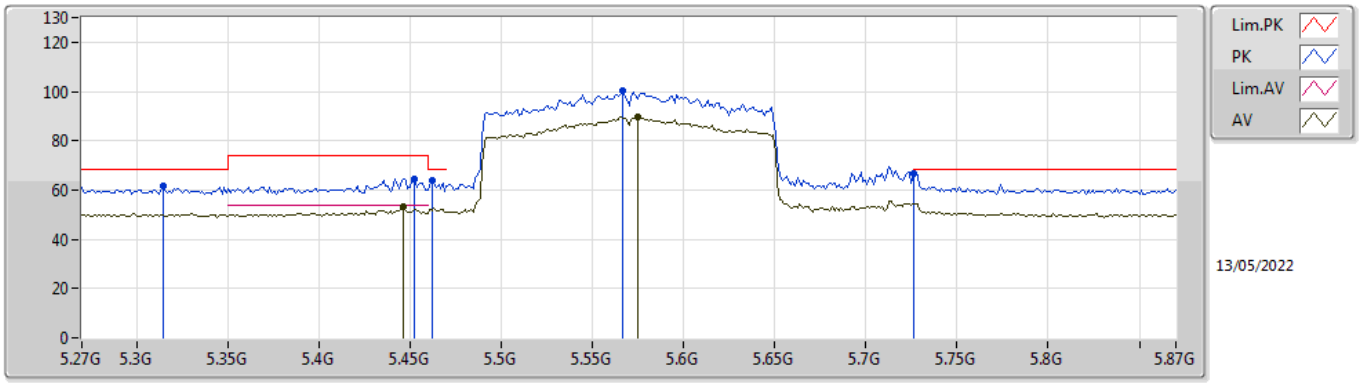


EUT X_2TX
Setting 9.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3144G	61.44	68.20	-6.76	55.08	3	Horizontal	192	2.13	-	34.50	7.20	35.34
PK	5.4524G	64.64	74.00	-9.36	58.24	3	Horizontal	192	2.13	-	34.50	7.25	35.35
AV	5.4464G	53.11	54.00	-0.89	46.70	3	Horizontal	192	2.13	-	34.51	7.25	35.35
PK	5.462G	64.12	68.20	-4.08	57.69	3	Horizontal	192	2.13	-	34.52	7.26	35.35
PK	5.5664G	100.38	Inf	-Inf	93.79	3	Horizontal	192	2.13	-	34.60	7.37	35.38
AV	5.5748G	89.93	Inf	-Inf	83.35	3	Horizontal	192	2.13	-	34.60	7.37	35.39
PK	5.726G	66.72	68.20	-1.48	60.53	3	Horizontal	192	2.13	-	34.25	7.40	35.46

802.11ax HEW160_Nss1,(MCS0)_2TX

5570MHz_TnomVnom

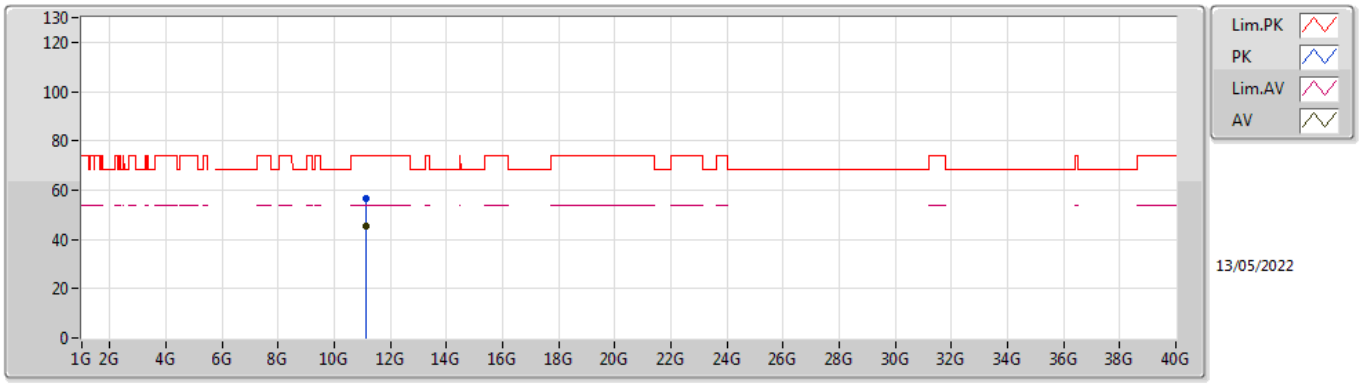


EUT X_2TX
Setting 9.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.15398G	56.79	74.00	-17.21	42.78	3	Vertical	280	1.05	-	38.55	10.67	35.21
AV	11.13028G	45.62	54.00	-8.38	31.61	3	Vertical	280	1.05	-	38.53	10.67	35.19

802.11ax HEW160_Nss1,(MCS0)_2TX

5570MHz_TnomVnom

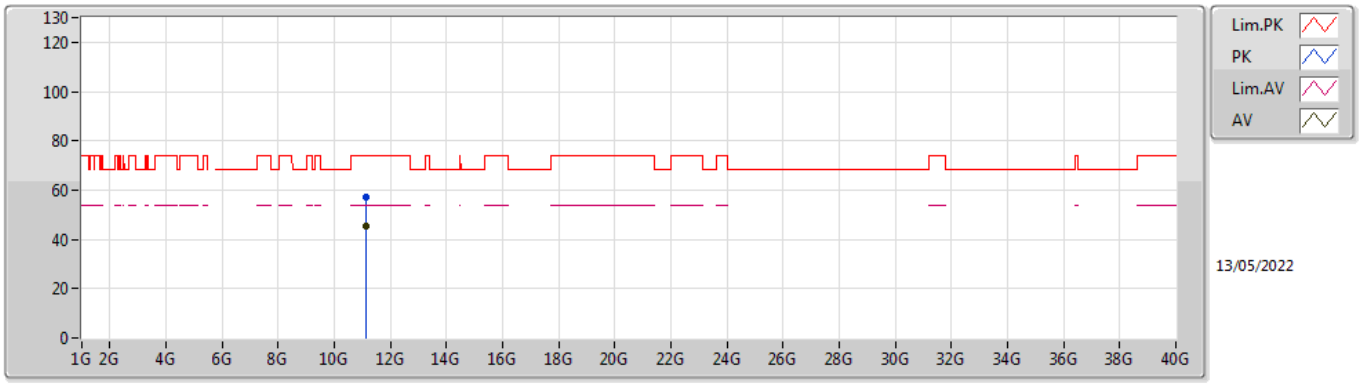

EUT X_2TX
Setting 9.75
03-D-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.13046G	57.16	74.00	-16.84	43.15	3	Horizontal	177	2.18	-	38.53	10.67	35.19
AV	11.15128G	45.57	54.00	-8.43	31.56	3	Horizontal	177	2.18	-	38.55	10.67	35.21

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW40_Nss1,(MCS0)_2TX	Pass	PK	5.464G	68.18	68.20	-0.02	3	Vertical	177	1.77	-

802.11a_Nss1,(6Mbps)_2TX

5180MHz_TnomVnom

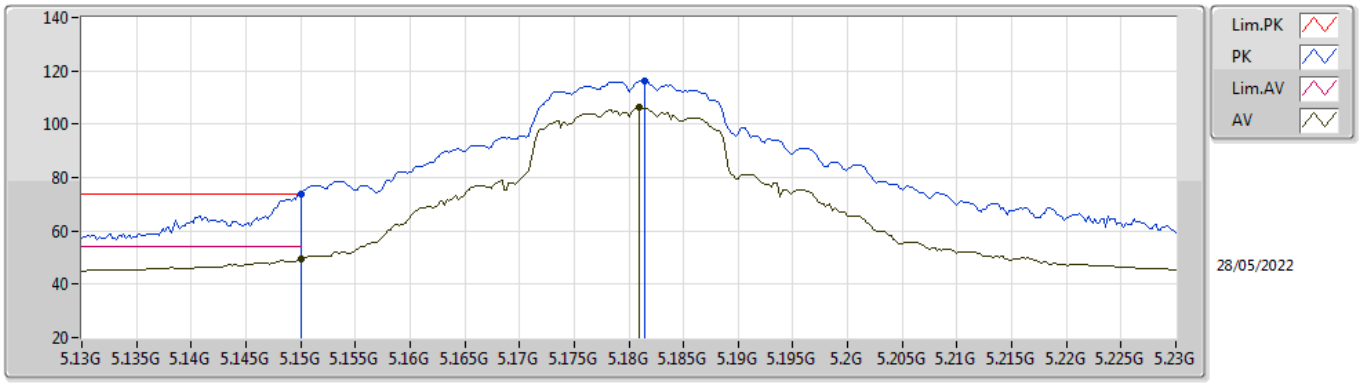


EUT X_2TX
Setting 20.25
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	73.97	74.00	-0.03	68.14	3	Vertical	178	2.14	-	34.00	7.17	35.34
AV	5.15G	49.58	54.00	-4.42	43.75	3	Vertical	178	2.14	-	34.00	7.17	35.34
PK	5.1814G	116.44	Inf	-Inf	110.46	3	Vertical	178	2.14	-	34.13	7.19	35.34
AV	5.181G	106.14	Inf	-Inf	100.17	3	Vertical	178	2.14	-	34.12	7.19	35.34

802.11a_Nss1,(6Mbps)_2TX

5180MHz_TnomVnom

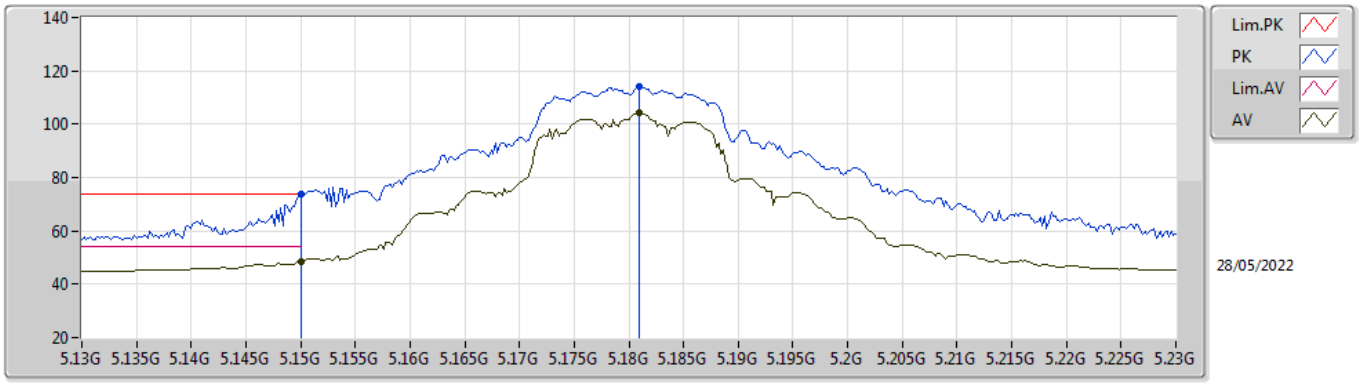


EUT X_2TX
Setting 20.25
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	73.55	74.00	-0.45	67.72	3	Horizontal	186	2.18	-	34.00	7.17	35.34
AV	5.15G	48.64	54.00	-5.36	42.81	3	Horizontal	186	2.18	-	34.00	7.17	35.34
PK	5.181G	113.97	Inf	-Inf	108.00	3	Horizontal	186	2.18	-	34.12	7.19	35.34
AV	5.181G	104.08	Inf	-Inf	98.11	3	Horizontal	186	2.18	-	34.12	7.19	35.34

802.11a_Nss1,(6Mbps)_2TX

5180MHz_TnomVnom

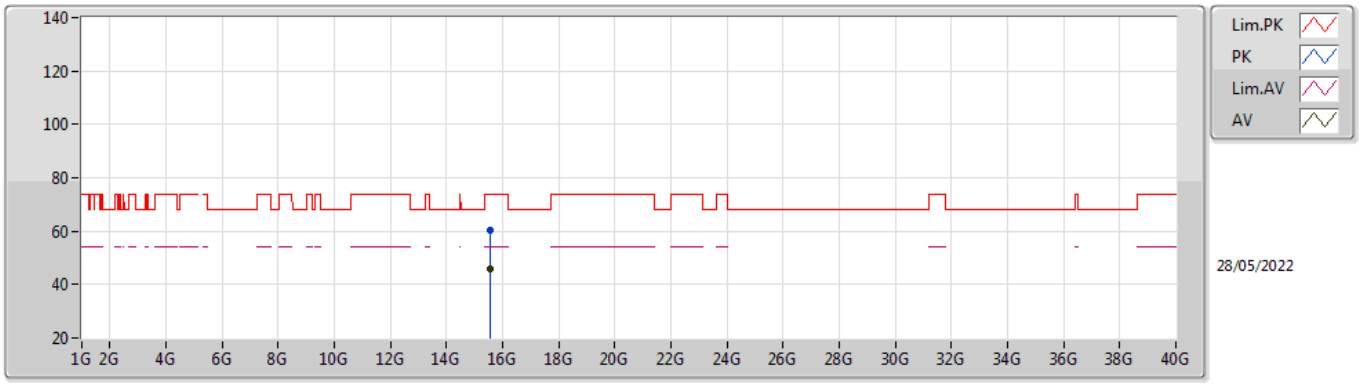


EUT X_2TX
Setting 20.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.53616G	60.31	74.00	-13.69	44.09	3	Vertical	104	2.19	-	38.45	13.17	35.40
AV	15.53718G	45.93	54.00	-8.07	29.72	3	Vertical	104	2.19	-	38.44	13.17	35.40

802.11a_Nss1,(6Mbps)_2TX

5180MHz_TnomVnom

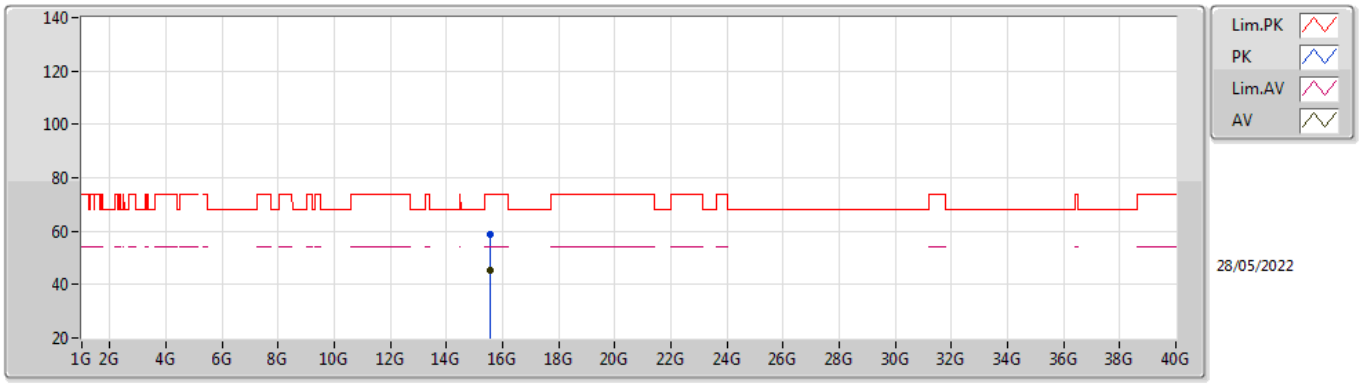


EUT X_2TX
Setting 20.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5472G	58.76	74.00	-15.24	42.63	3	Horizontal	280	1.04	-	38.37	13.17	35.41
AV	15.5415G	45.15	54.00	-8.85	28.97	3	Horizontal	280	1.04	-	38.41	13.17	35.40

802.11a_Nss1,(6Mbps)_2TX

5200MHz_TnomVnom

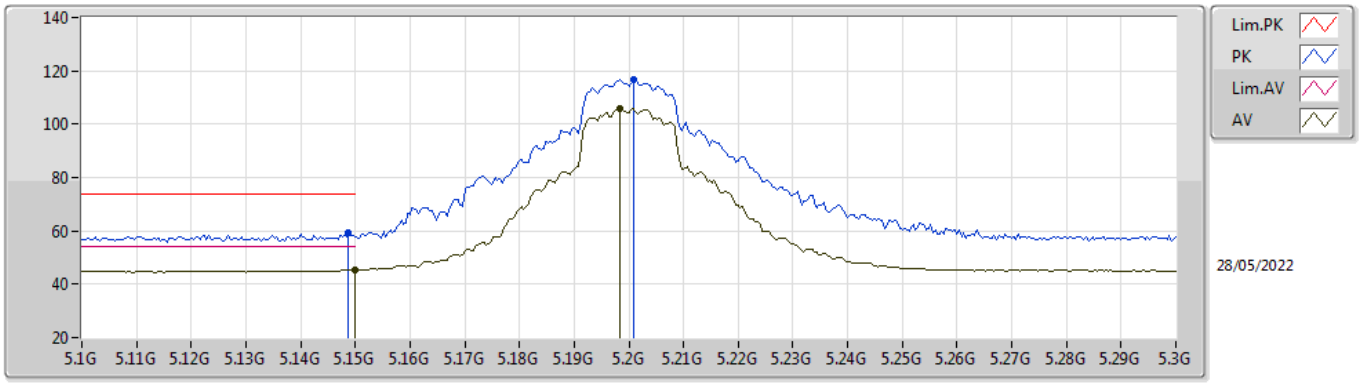


EUT X_2TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1488G	59.50	74.00	-14.50	53.67	3	Vertical	182	2.06	-	34.00	7.17	35.34
AV	5.15G	45.28	54.00	-8.72	39.45	3	Vertical	182	2.06	-	34.00	7.17	35.34
PK	5.2008G	116.73	Inf	-Inf	110.67	3	Vertical	182	2.06	-	34.20	7.20	35.34
AV	5.1984G	106.10	Inf	-Inf	100.05	3	Vertical	182	2.06	-	34.19	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5200MHz_TnomVnom

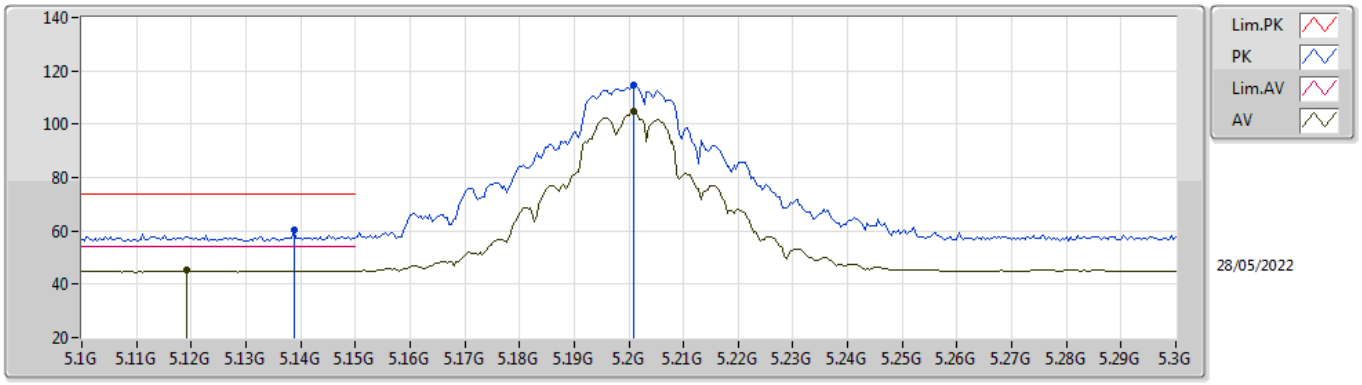


EUT X_2TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1388G	60.57	74.00	-13.43	54.76	3	Horizontal	188	2.16	-	33.98	7.17	35.34
AV	5.1192G	45.11	54.00	-8.89	39.34	3	Horizontal	188	2.16	-	33.94	7.16	35.33
PK	5.2008G	114.62	Inf	-Inf	108.56	3	Horizontal	188	2.16	-	34.20	7.20	35.34
AV	5.2008G	104.62	Inf	-Inf	98.56	3	Horizontal	188	2.16	-	34.20	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5200MHz_TnomVnom

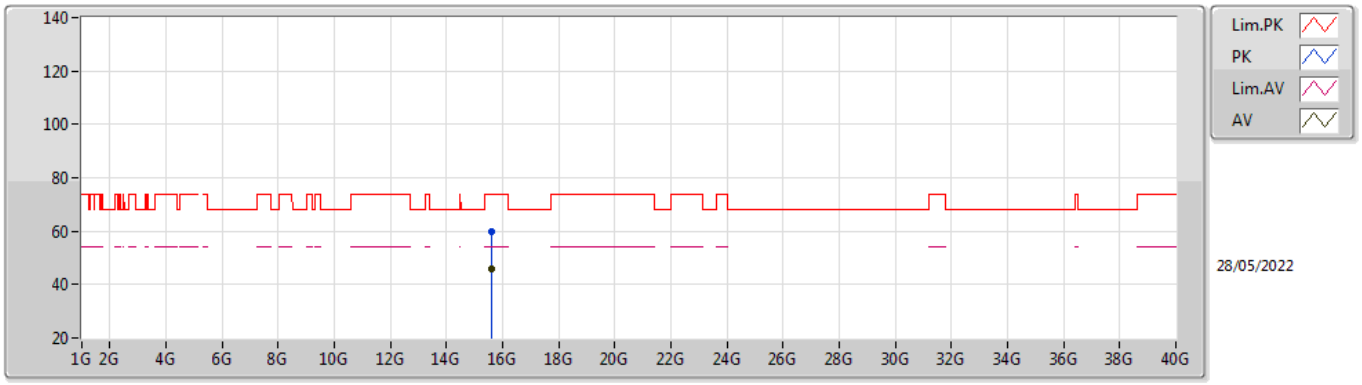


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.59832G	59.83	74.00	-14.17	44.07	3	Vertical	155	2.24	-	38.01	13.20	35.45
AV	15.5976G	46.12	54.00	-7.88	30.35	3	Vertical	155	2.24	-	38.02	13.20	35.45

802.11a_Nss1,(6Mbps)_2TX

5200MHz_TnomVnom

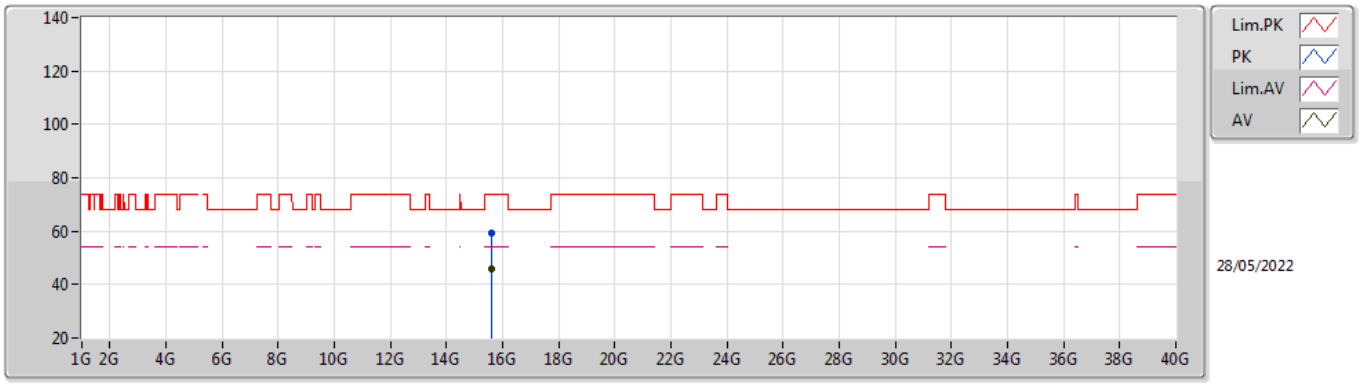


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.59634G	59.43	74.00	-14.57	43.65	3	Horizontal	184	1.79	-	38.03	13.20	35.45
AV	15.59688G	45.64	54.00	-8.36	29.87	3	Horizontal	184	1.79	-	38.02	13.20	35.45

802.11a_Nss1,(6Mbps)_2TX

5240MHz_TnomVnom

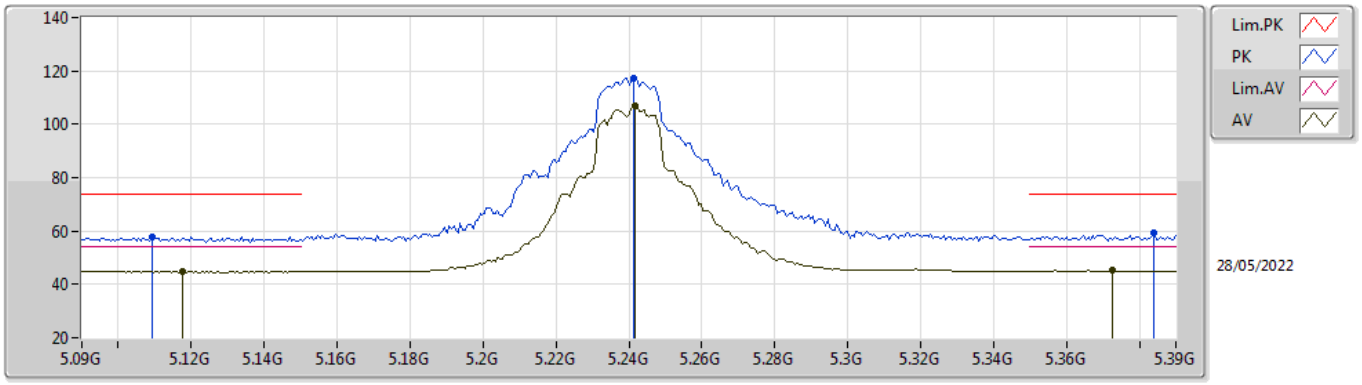


EUT X_2TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1092G	57.89	74.00	-16.11	52.15	3	Vertical	175	1.99	-	33.92	7.15	35.33
AV	5.1176G	44.71	54.00	-9.29	38.94	3	Vertical	175	1.99	-	33.94	7.16	35.33
PK	5.2412G	117.41	Inf	-Inf	111.19	3	Vertical	175	1.99	-	34.36	7.20	35.34
AV	5.2418G	107.00	Inf	-Inf	100.77	3	Vertical	175	1.99	-	34.37	7.20	35.34
PK	5.384G	59.25	74.00	-14.75	52.83	3	Vertical	175	1.99	-	34.57	7.20	35.35
AV	5.3726G	45.13	54.00	-8.87	38.72	3	Vertical	175	1.99	-	34.55	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5240MHz_TnomVnom

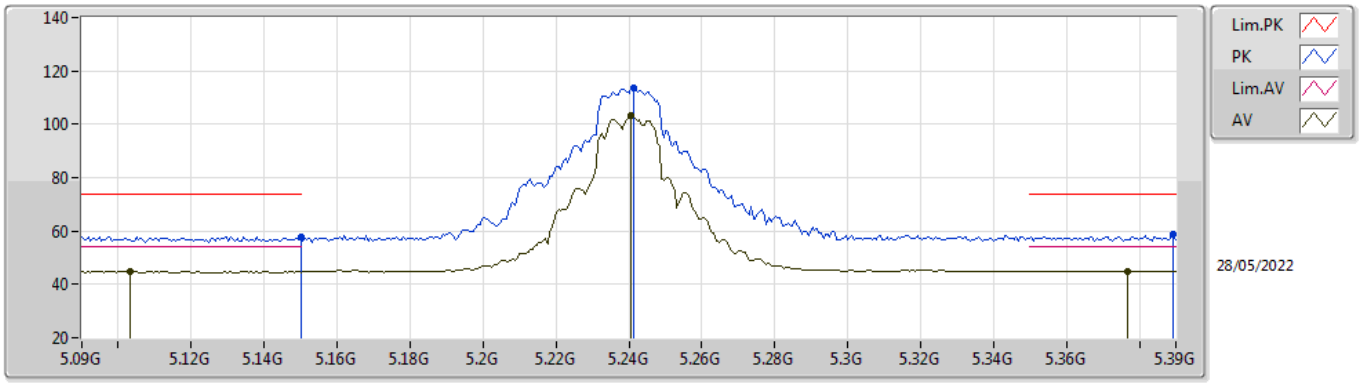


EUT X_2TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	58.01	74.00	-15.99	52.18	3	Horizontal	188	2.15	-	34.00	7.17	35.34
AV	5.1032G	44.67	54.00	-9.33	38.94	3	Horizontal	188	2.15	-	33.91	7.15	35.33
PK	5.2412G	113.69	Inf	-Inf	107.47	3	Horizontal	188	2.15	-	34.36	7.20	35.34
AV	5.2406G	103.48	Inf	-Inf	97.26	3	Horizontal	188	2.15	-	34.36	7.20	35.34
PK	5.3894G	58.79	74.00	-15.21	52.36	3	Horizontal	188	2.15	-	34.58	7.20	35.35
AV	5.3768G	45.03	54.00	-8.97	38.63	3	Horizontal	188	2.15	-	34.55	7.20	35.35

802.11a_Nss1,(6Mbps)_2TX

5240MHz_TnomVnom

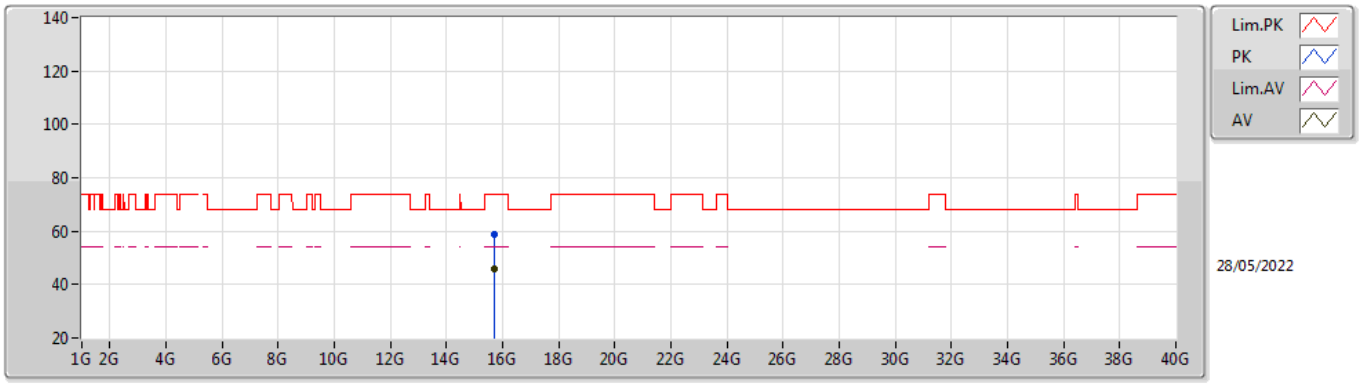


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.71778G	58.97	74.00	-15.03	43.69	3	Vertical	137	1.58	-	37.57	13.26	35.55
AV	15.72282G	45.77	54.00	-8.23	30.48	3	Vertical	137	1.58	-	37.59	13.26	35.56

802.11a_Nss1,(6Mbps)_2TX

5240MHz_TnomVnom

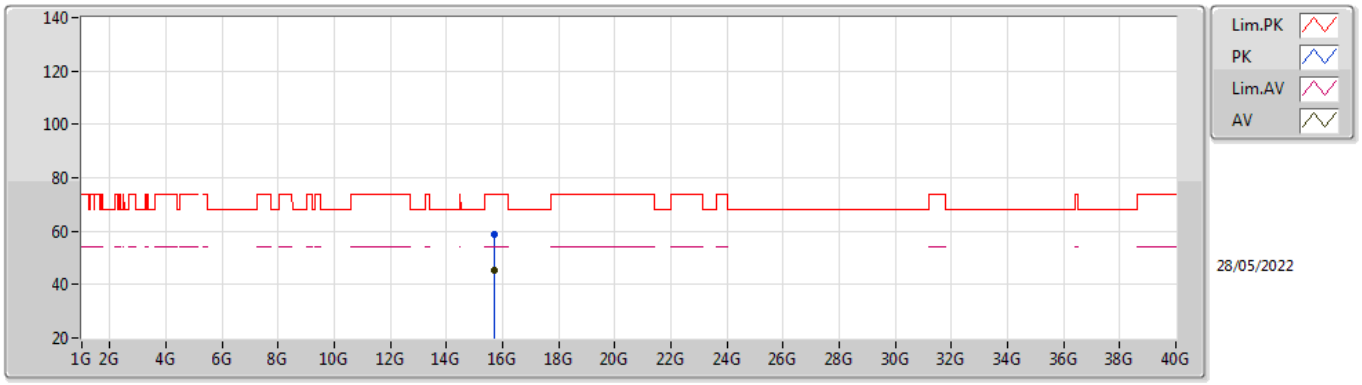


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.71952G	58.84	74.00	-15.16	43.55	3	Horizontal	270	1.80	-	37.58	13.26	35.55
AV	15.72126G	45.10	54.00	-8.90	29.81	3	Horizontal	270	1.80	-	37.59	13.26	35.56

802.11a_Nss1,(6Mbps)_2TX

5260MHz_TnomVnom

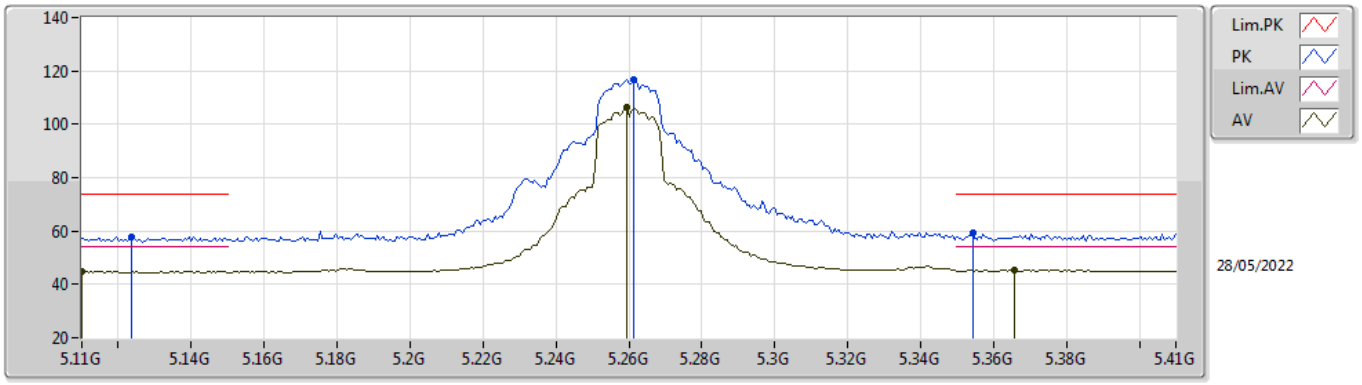


EUT X_2TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1238G	57.81	74.00	-16.19	52.03	3	Vertical	176	2.02	-	33.95	7.16	35.33
AV	5.11G	44.67	54.00	-9.33	38.92	3	Vertical	176	2.02	-	33.92	7.16	35.33
PK	5.2612G	116.51	Inf	-Inf	110.23	3	Vertical	176	2.02	-	34.42	7.20	35.34
AV	5.2594G	106.21	Inf	-Inf	99.93	3	Vertical	176	2.02	-	34.42	7.20	35.34
PK	5.3542G	59.10	74.00	-14.90	52.73	3	Vertical	176	2.02	-	34.51	7.20	35.34
AV	5.3656G	45.15	54.00	-8.85	38.76	3	Vertical	176	2.02	-	34.53	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5260MHz_TnomVnom

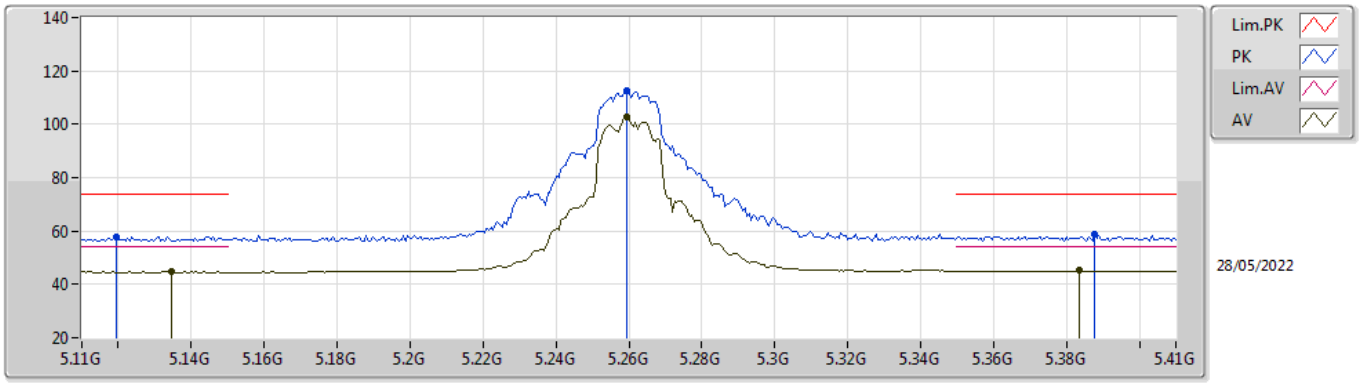


EUT X_2TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1196G	58.01	74.00	-15.99	52.24	3	Horizontal	195	1.92	-	33.94	7.16	35.33
AV	5.1346G	44.66	54.00	-9.34	38.86	3	Horizontal	195	1.92	-	33.97	7.17	35.34
PK	5.2594G	112.76	Inf	-Inf	106.48	3	Horizontal	195	1.92	-	34.42	7.20	35.34
AV	5.2594G	102.62	Inf	-Inf	96.34	3	Horizontal	195	1.92	-	34.42	7.20	35.34
PK	5.3878G	58.82	74.00	-15.18	52.39	3	Horizontal	195	1.92	-	34.58	7.20	35.35
AV	5.3836G	45.10	54.00	-8.90	38.68	3	Horizontal	195	1.92	-	34.57	7.20	35.35

802.11a_Nss1,(6Mbps)_2TX

5260MHz_TnomVnom

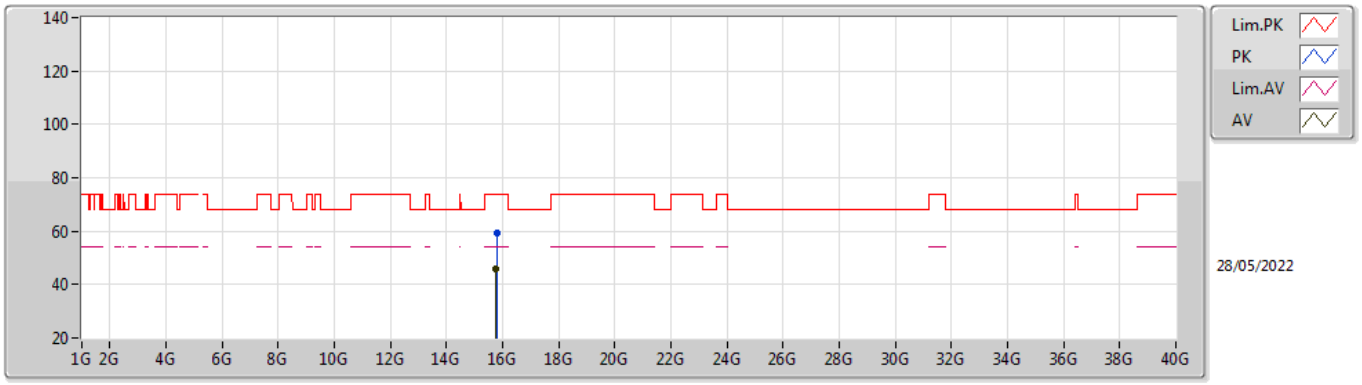


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.78156G	59.15	74.00	-14.85	43.64	3	Vertical	175	2.03	-	37.83	13.29	35.61
AV	15.77754G	45.75	54.00	-8.25	30.25	3	Vertical	175	2.03	-	37.81	13.29	35.60

802.11a_Nss1,(6Mbps)_2TX

5260MHz_TnomVnom

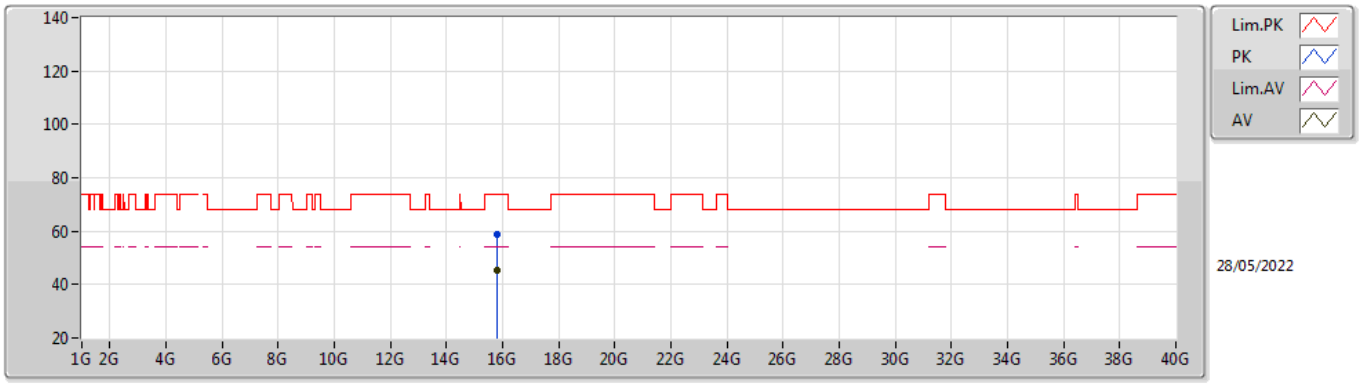


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.79266G	58.67	74.00	-15.33	43.12	3	Horizontal	317	2.81	-	37.87	13.30	35.62
AV	15.7821G	45.43	54.00	-8.57	29.92	3	Horizontal	317	2.81	-	37.83	13.29	35.61

802.11a_Nss1,(6Mbps)_2TX

5300MHz_TnomVnom

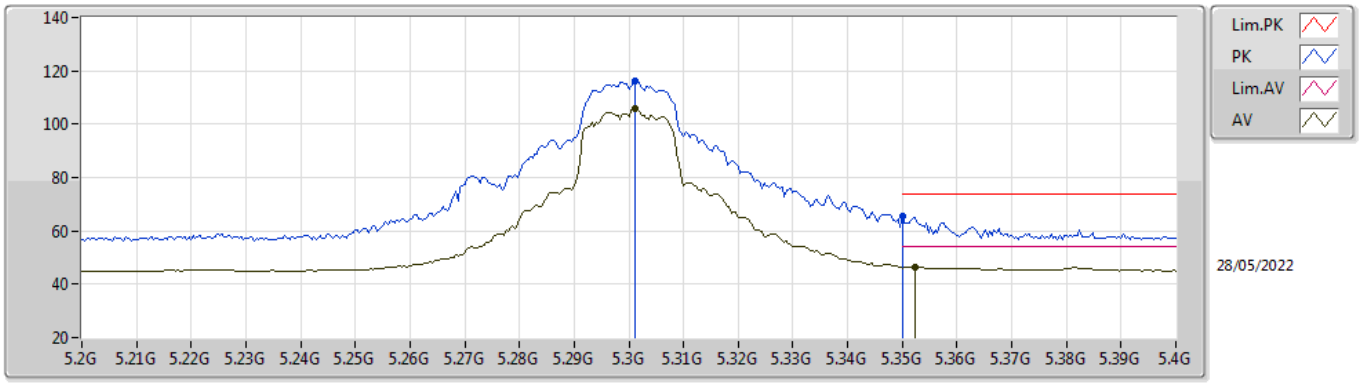


EUT X_2TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3012G	116.25	Inf	-Inf	109.89	3	Vertical	179	1.80	-	34.50	7.20	35.34
AV	5.3012G	105.68	Inf	-Inf	99.32	3	Vertical	179	1.80	-	34.50	7.20	35.34
PK	5.35G	65.30	74.00	-8.70	58.94	3	Vertical	179	1.80	-	34.50	7.20	35.34
AV	5.3524G	46.40	54.00	-7.60	40.04	3	Vertical	179	1.80	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5300MHz_TnomVnom

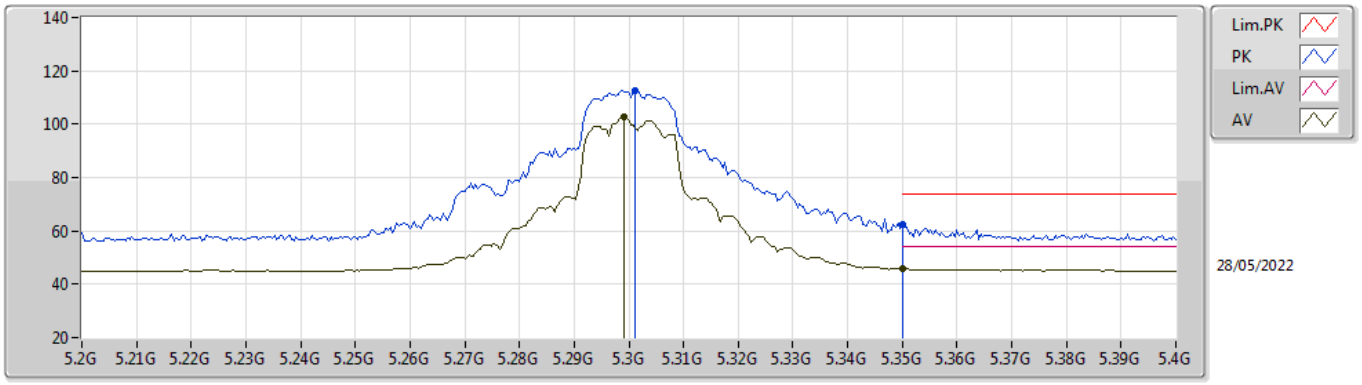


EUT X_2TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3012G	112.70	Inf	-Inf	106.34	3	Horizontal	201	2.02	-	34.50	7.20	35.34
AV	5.2992G	102.71	Inf	-Inf	96.35	3	Horizontal	201	2.02	-	34.50	7.20	35.34
PK	5.35G	62.33	74.00	-11.67	55.97	3	Horizontal	201	2.02	-	34.50	7.20	35.34
AV	5.35G	45.85	54.00	-8.15	39.49	3	Horizontal	201	2.02	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5300MHz_TnomVnom

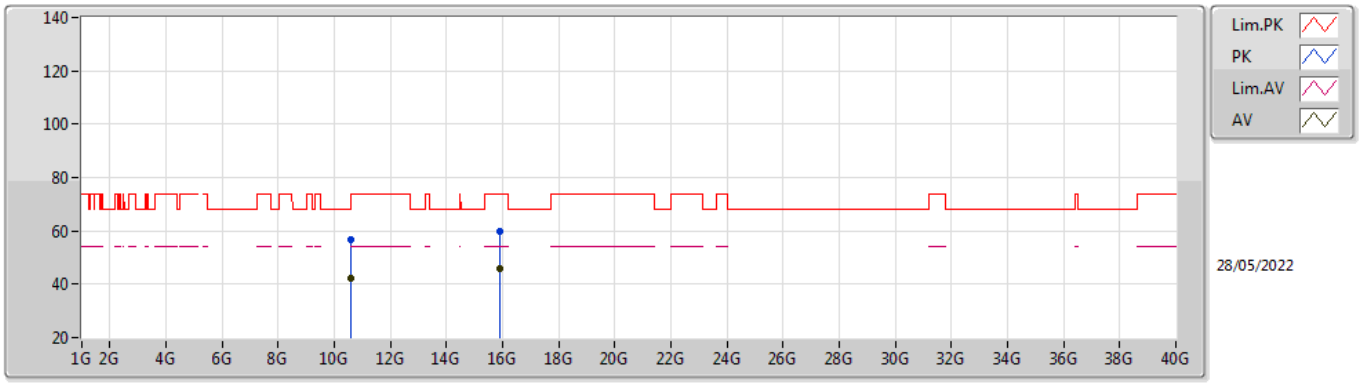


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60309G	56.51	74.00	-17.49	43.09	3	Vertical	204	1.80	-	38.21	10.59	35.38
AV	10.60285G	42.20	54.00	-11.80	28.78	3	Vertical	204	1.80	-	38.21	10.59	35.38
PK	15.89838G	60.03	74.00	-13.97	44.78	3	Vertical	195	2.44	-	37.60	13.35	35.70
AV	15.89742G	45.86	54.00	-8.14	30.60	3	Vertical	195	2.44	-	37.61	13.35	35.70

802.11a_Nss1,(6Mbps)_2TX

5300MHz_TnomVnom

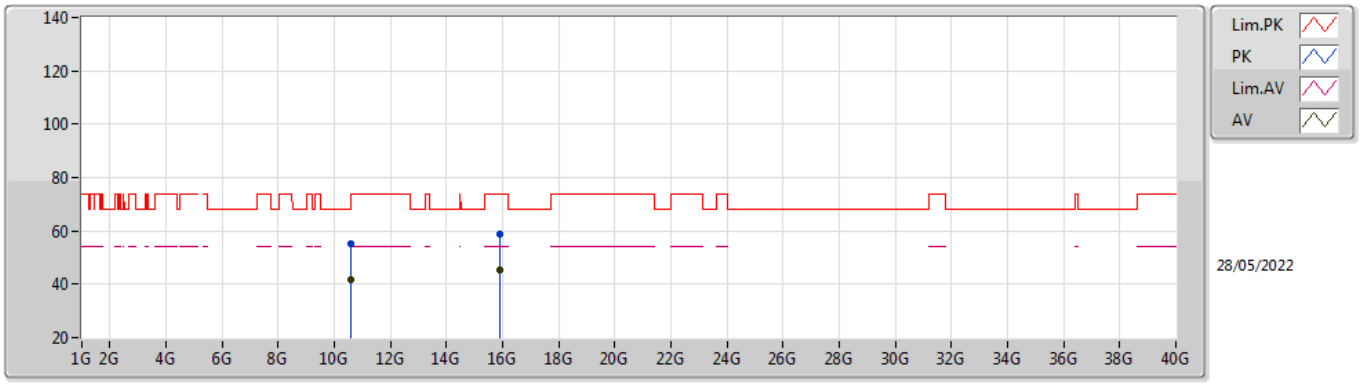


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.59862G	55.25	68.20	-12.95	41.85	3	Horizontal	146	2.11	-	38.20	10.59	35.39
AV	10.60396G	41.90	54.00	-12.10	28.48	3	Horizontal	146	2.11	-	38.21	10.59	35.38
PK	15.90564G	58.96	74.00	-15.04	43.73	3	Horizontal	279	1.00	-	37.59	13.35	35.71
AV	15.8973G	45.16	54.00	-8.84	29.90	3	Horizontal	279	1.00	-	37.61	13.35	35.70

802.11a_Nss1,(6Mbps)_2TX

5320MHz_TnomVnom

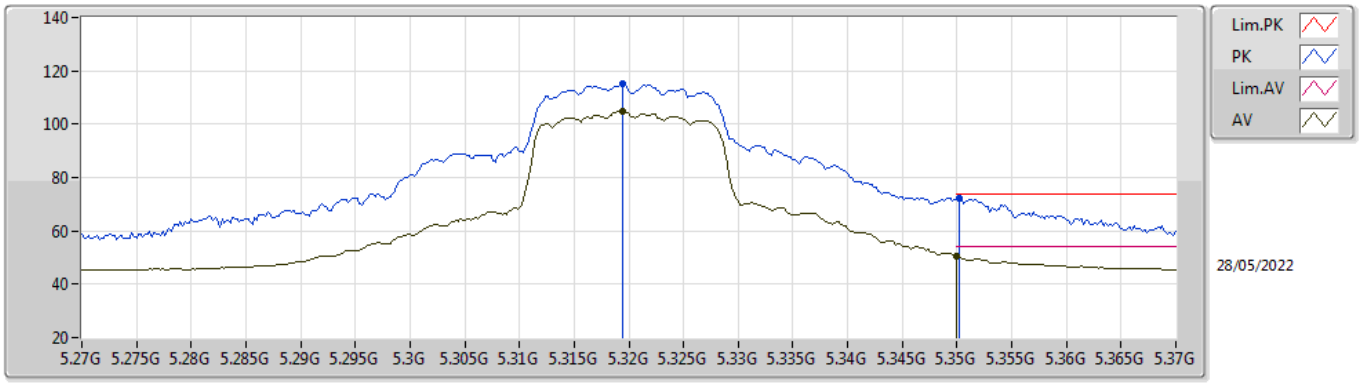


EUT X_2TX
Setting 16.75
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3194G	115.04	Inf	-Inf	108.68	3	Vertical	175	2.10	-	34.50	7.20	35.34
AV	5.3194G	105.01	Inf	-Inf	98.65	3	Vertical	175	2.10	-	34.50	7.20	35.34
PK	5.3502G	72.02	74.00	-1.98	65.66	3	Vertical	175	2.10	-	34.50	7.20	35.34
AV	5.35G	50.54	54.00	-3.46	44.18	3	Vertical	175	2.10	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5320MHz_TnomVnom

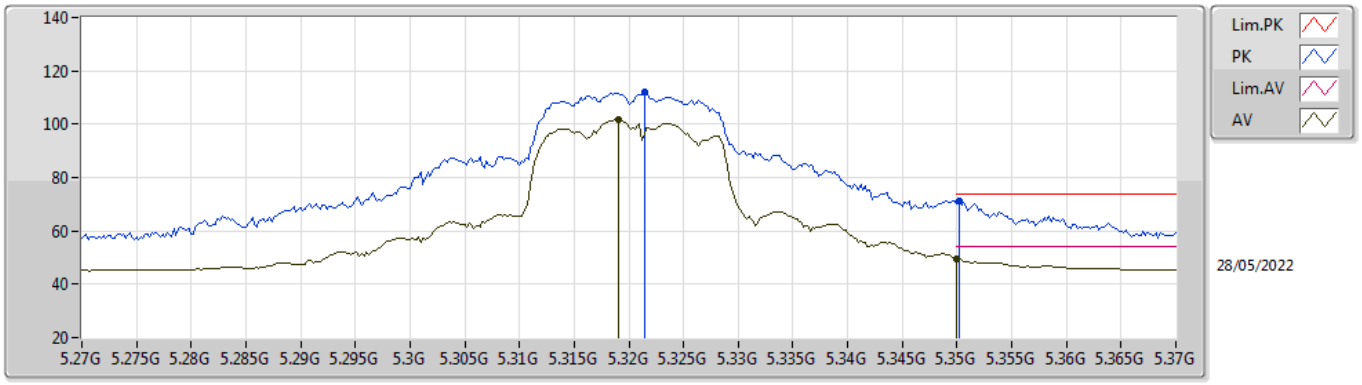


EUT X_2TX
Setting 16.75
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3214G	111.88	Inf	-Inf	105.52	3	Horizontal	202	1.94	-	34.50	7.20	35.34
AV	5.319G	101.57	Inf	-Inf	95.21	3	Horizontal	202	1.94	-	34.50	7.20	35.34
PK	5.3502G	71.21	74.00	-2.79	64.85	3	Horizontal	202	1.94	-	34.50	7.20	35.34
AV	5.35G	49.47	54.00	-4.53	43.11	3	Horizontal	202	1.94	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5320MHz_TnomVnom

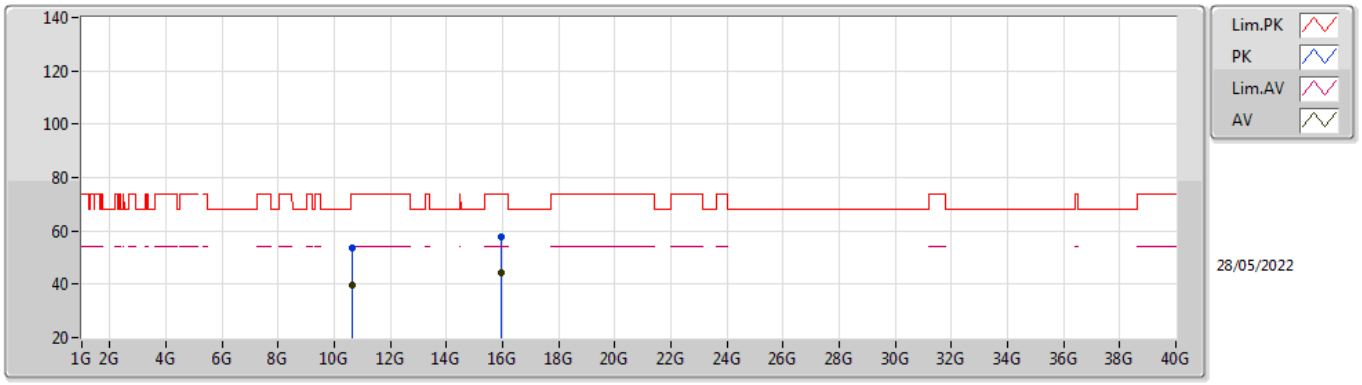


EUT X_2TX
Setting 16.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.63802G	53.84	74.00	-20.16	40.31	3	Vertical	130	1.80	-	38.28	10.60	35.35
AV	10.64036G	39.69	54.00	-14.31	26.16	3	Vertical	130	1.80	-	38.28	10.60	35.35
PK	15.96654G	57.76	74.00	-16.24	42.67	3	Vertical	169	2.65	-	37.47	13.38	35.76
AV	15.96036G	44.14	54.00	-9.86	29.04	3	Vertical	169	2.65	-	37.48	13.38	35.76

802.11a_Nss1,(6Mbps)_2TX

5320MHz_TnomVnom

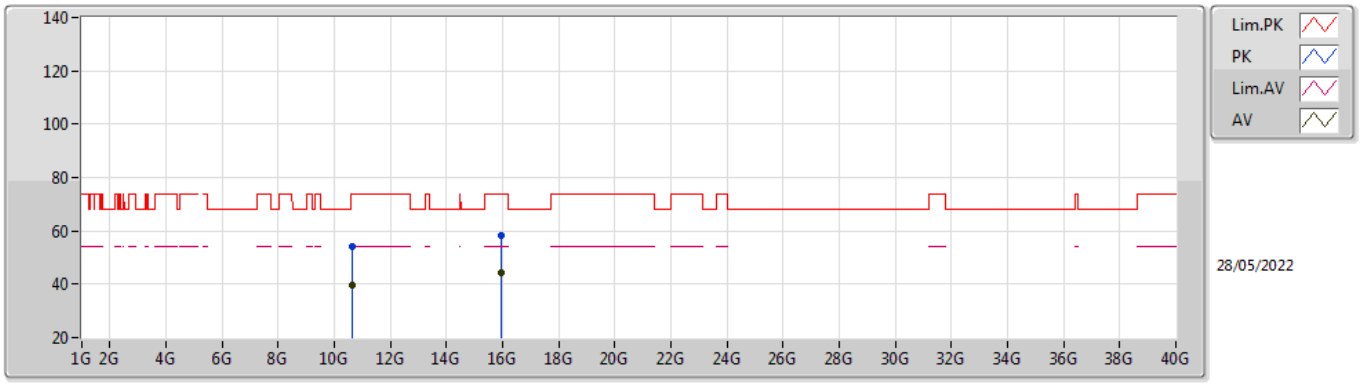


EUT X_2TX
Setting 16.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.63772G	53.92	74.00	-20.08	40.39	3	Horizontal	139	2.10	-	38.28	10.60	35.35
AV	10.64546G	39.70	54.00	-14.30	26.15	3	Horizontal	139	2.10	-	38.29	10.60	35.34
PK	15.9516G	58.05	74.00	-15.95	42.92	3	Horizontal	193	1.25	-	37.50	13.38	35.75
AV	15.97248G	44.16	54.00	-9.84	29.08	3	Horizontal	193	1.25	-	37.46	13.39	35.77

802.11a_Nss1,(6Mbps)_2TX

5500MHz_TnomVnom

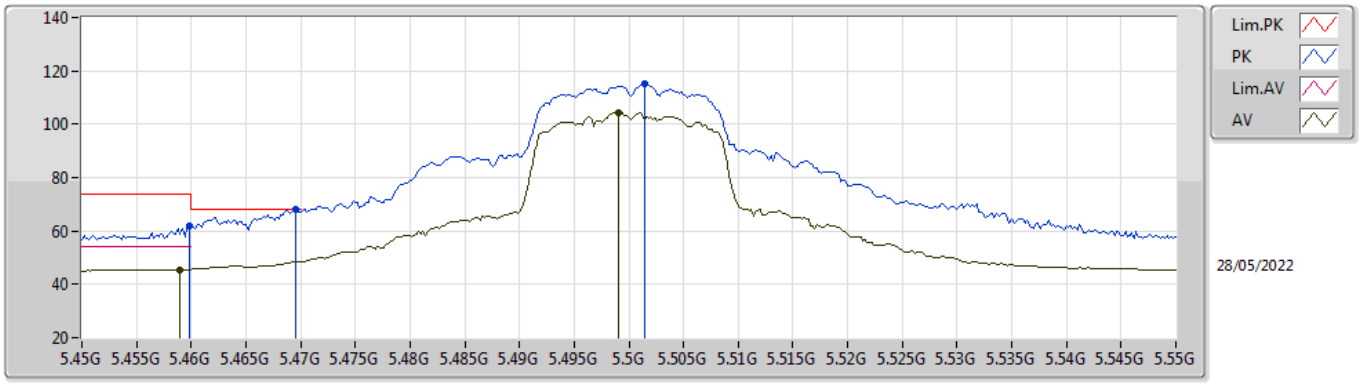


EUT X_2TX
Setting 17.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4598G	61.93	74.00	-12.07	55.50	3	Vertical	178	1.76	-	34.52	7.26	35.35
AV	5.459G	45.52	54.00	-8.48	39.09	3	Vertical	178	1.76	-	34.52	7.26	35.35
PK	5.4696G	68.04	68.20	-0.16	61.58	3	Vertical	178	1.76	-	34.54	7.27	35.35
PK	5.5014G	114.98	Inf	-Inf	108.43	3	Vertical	178	1.76	-	34.60	7.30	35.35
AV	5.499G	104.44	Inf	-Inf	97.89	3	Vertical	178	1.76	-	34.60	7.30	35.35

802.11a_Nss1,(6Mbps)_2TX

5500MHz_TnomVnom

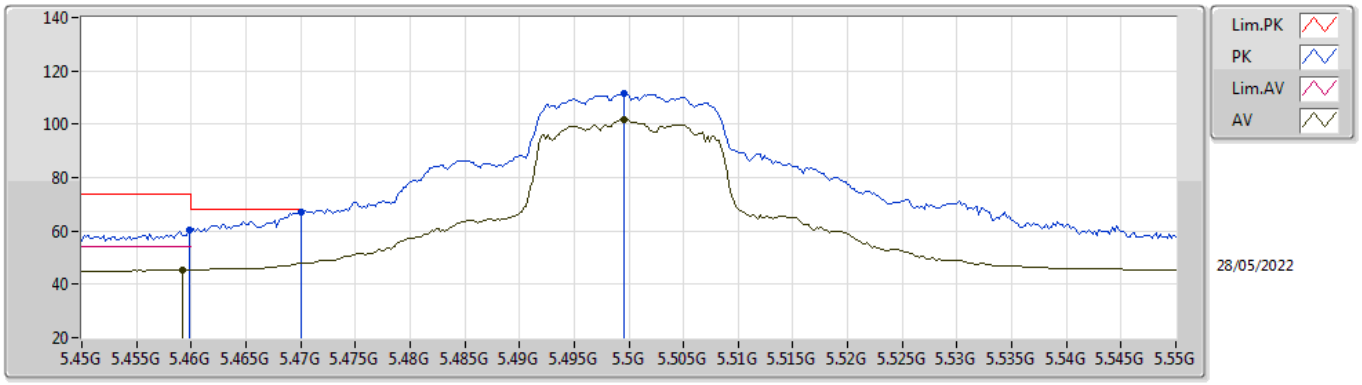


EUT X_2TX
Setting 17.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4598G	60.17	74.00	-13.83	53.74	3	Horizontal	190	3.00	-	34.52	7.26	35.35
AV	5.4592G	45.38	54.00	-8.62	38.95	3	Horizontal	190	3.00	-	34.52	7.26	35.35
PK	5.47G	67.20	68.20	-1.00	60.74	3	Horizontal	190	3.00	-	34.54	7.27	35.35
PK	5.4996G	111.79	Inf	-Inf	105.24	3	Horizontal	190	3.00	-	34.60	7.30	35.35
AV	5.4996G	101.98	Inf	-Inf	95.43	3	Horizontal	190	3.00	-	34.60	7.30	35.35

802.11a_Nss1,(6Mbps)_2TX

5500MHz_TnomVnom

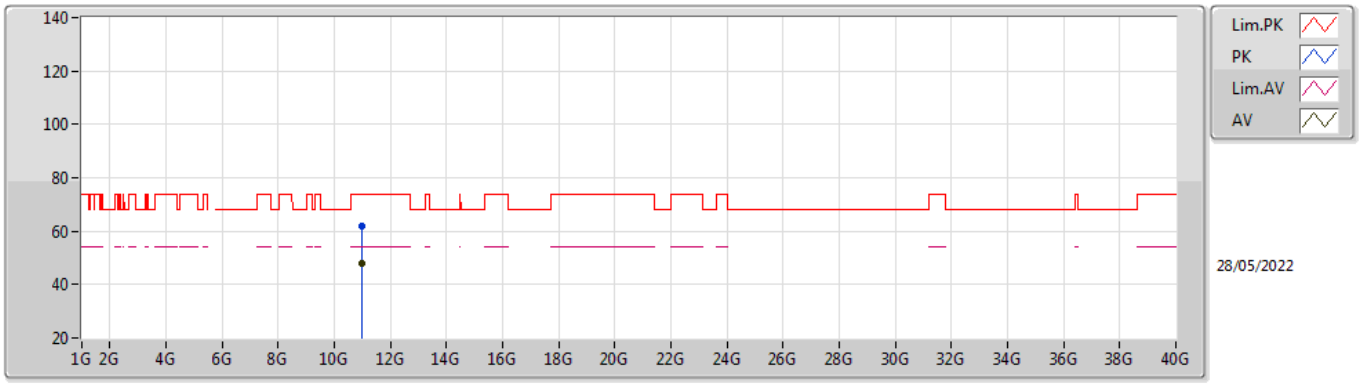


EUT X_2TX
Setting 17.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.00372G	62.07	74.00	-11.93	48.06	3	Vertical	225	1.45	-	38.40	10.65	35.04
AV	11.00384G	47.68	54.00	-6.32	33.67	3	Vertical	225	1.45	-	38.40	10.65	35.04

802.11a_Nss1,(6Mbps)_2TX

5500MHz_TnomVnom

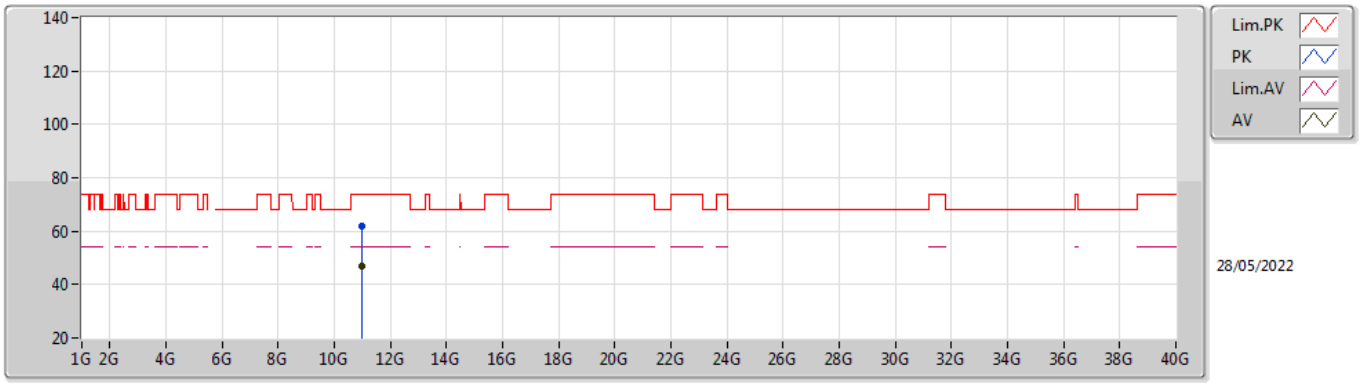


EUT X_2TX
Setting 17.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.99958G	61.72	74.00	-12.28	47.71	3	Horizontal	136	2.11	-	38.40	10.65	35.04
AV	10.99994G	47.14	54.00	-6.86	33.13	3	Horizontal	136	2.11	-	38.40	10.65	35.04

802.11a_Nss1,(6Mbps)_2TX

5580MHz_TnomVnom

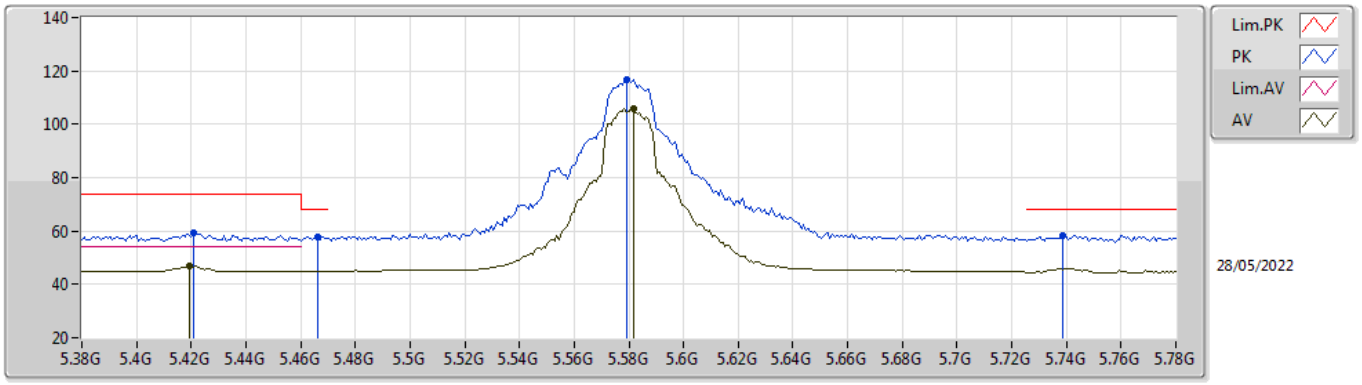


EUT X_2TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4208G	59.51	74.00	-14.49	53.08	3	Vertical	178	1.80	-	34.56	7.22	35.35
AV	5.4192G	46.73	54.00	-7.27	40.30	3	Vertical	178	1.80	-	34.56	7.22	35.35
PK	5.4664G	57.80	68.20	-10.40	51.35	3	Vertical	178	1.80	-	34.53	7.27	35.35
PK	5.5792G	116.70	Inf	-Inf	110.11	3	Vertical	178	1.80	-	34.60	7.38	35.39
AV	5.5816G	105.96	Inf	-Inf	99.37	3	Vertical	178	1.80	-	34.60	7.38	35.39
PK	5.7384G	58.35	68.20	-9.85	52.20	3	Vertical	178	1.80	-	34.22	7.40	35.47

802.11a_Nss1,(6Mbps)_2TX

5580MHz_TnomVnom

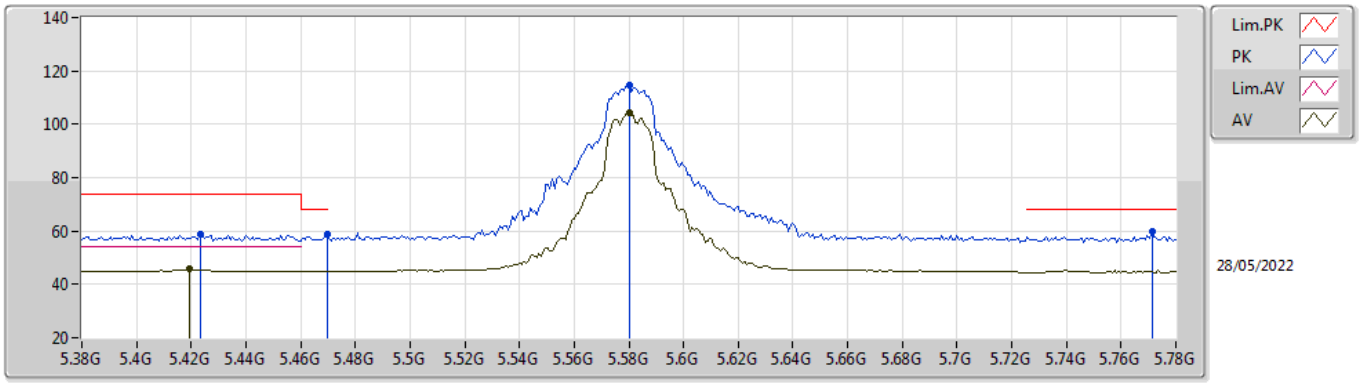


EUT X_2TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4232G	59.03	74.00	-14.97	52.61	3	Horizontal	191	2.98	-	34.55	7.22	35.35
AV	5.4192G	45.75	54.00	-8.25	39.32	3	Horizontal	191	2.98	-	34.56	7.22	35.35
PK	5.4696G	58.75	68.20	-9.45	52.29	3	Horizontal	191	2.98	-	34.54	7.27	35.35
PK	5.58G	114.64	Inf	-Inf	108.05	3	Horizontal	191	2.98	-	34.60	7.38	35.39
AV	5.58G	104.43	Inf	-Inf	97.84	3	Horizontal	191	2.98	-	34.60	7.38	35.39
PK	5.7712G	59.79	68.20	-8.41	53.68	3	Horizontal	191	2.98	-	34.20	7.40	35.49

802.11a_Nss1,(6Mbps)_2TX

5580MHz_TnomVnom

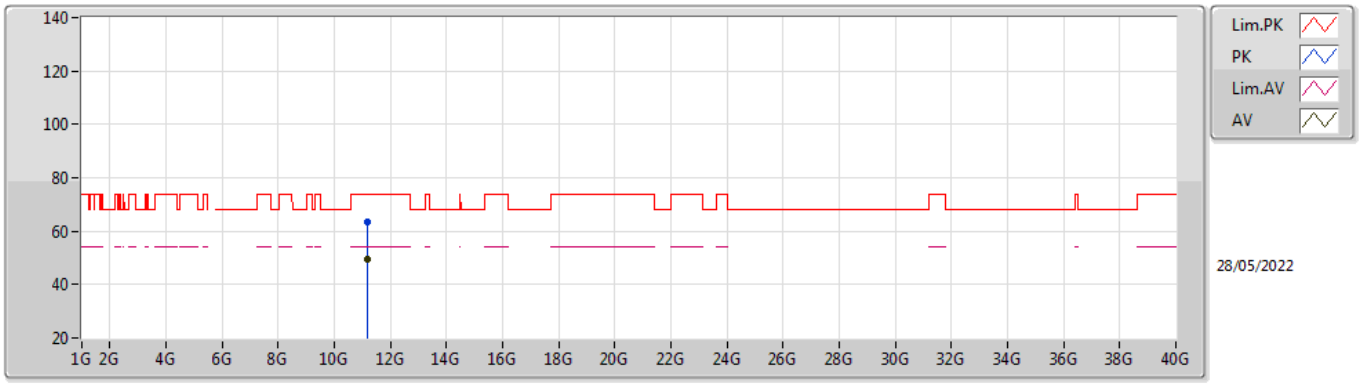


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.15982G	63.68	74.00	-10.32	49.67	3	Vertical	200	1.00	-	38.56	10.67	35.22
AV	11.1594G	49.66	54.00	-4.34	35.65	3	Vertical	200	1.00	-	38.56	10.67	35.22

802.11a_Nss1,(6Mbps)_2TX

5580MHz_TnomVnom

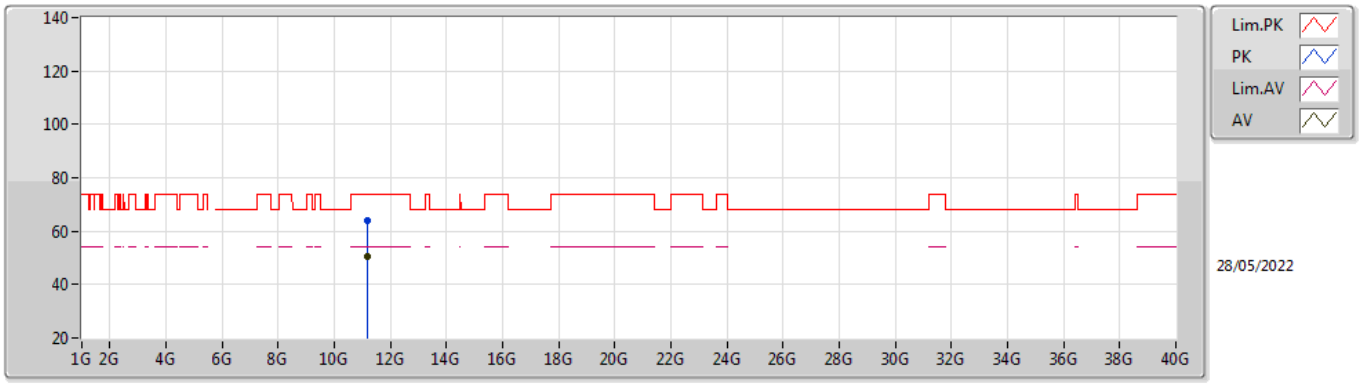


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.15982G	63.96	74.00	-10.04	49.95	3	Horizontal	138	2.11	-	38.56	10.67	35.22
AV	11.16036G	50.77	54.00	-3.23	36.76	3	Horizontal	138	2.11	-	38.56	10.67	35.22

802.11a_Nss1,(6Mbps)_2TX

5700MHz_TnomVnom

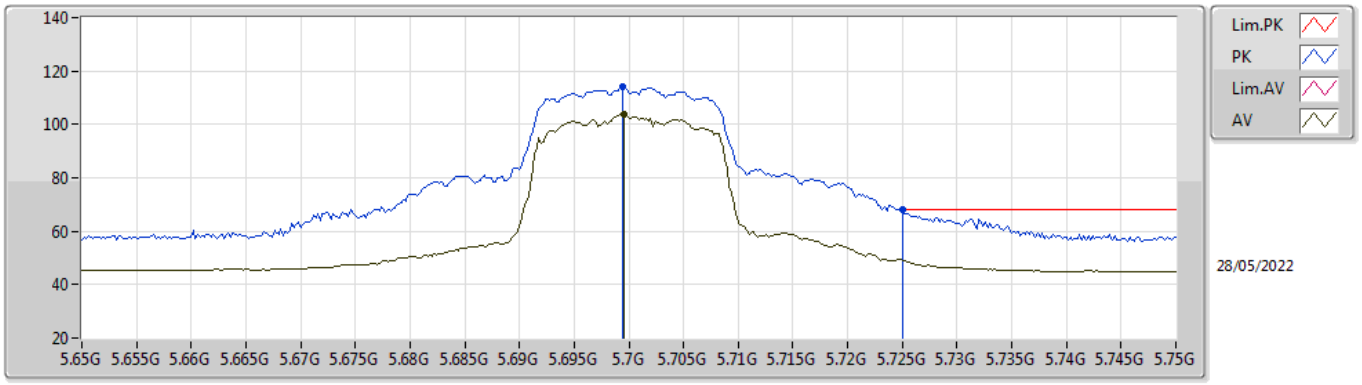


EUT X_2TX
Setting 15.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6994G	114.13	Inf	-Inf	107.88	3	Vertical	175	1.74	-	34.30	7.40	35.45
AV	5.6996G	103.98	Inf	-Inf	97.73	3	Vertical	175	1.74	-	34.30	7.40	35.45
PK	5.725G	68.13	68.20	-0.07	61.94	3	Vertical	175	1.74	-	34.25	7.40	35.46

802.11a_Nss1,(6Mbps)_2TX

5700MHz_TnomVnom

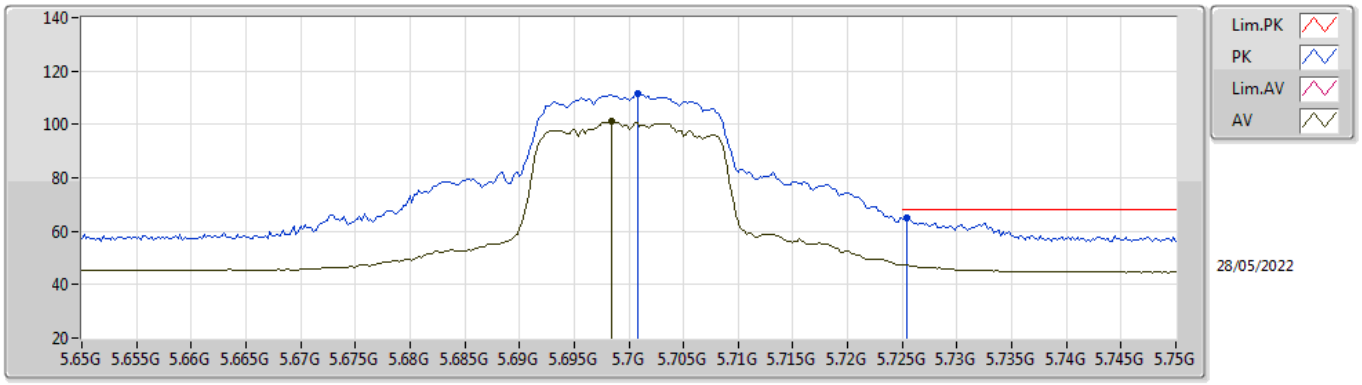


EUT X_2TX
Setting 15.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7008G	111.37	Inf	-Inf	105.12	3	Horizontal	184	3.00	-	34.30	7.40	35.45
AV	5.6984G	101.18	Inf	-Inf	94.92	3	Horizontal	184	3.00	-	34.31	7.40	35.45
PK	5.7254G	64.82	68.20	-3.38	58.63	3	Horizontal	184	3.00	-	34.25	7.40	35.46

802.11a_Nss1,(6Mbps)_2TX

5700MHz_TnomVnom

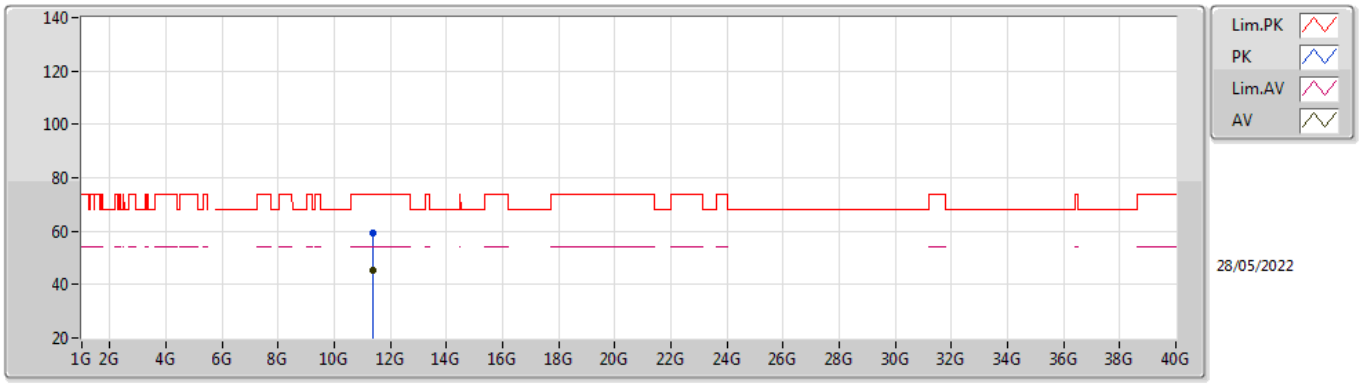


EUT X_2TX
Setting 15.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.39988G	59.10	74.00	-14.90	45.08	3	Vertical	201	1.05	-	38.80	10.71	35.49
AV	11.39904G	45.30	54.00	-8.70	31.28	3	Vertical	201	1.05	-	38.80	10.71	35.49

802.11a_Nss1,(6Mbps)_2TX

5700MHz_TnomVnom

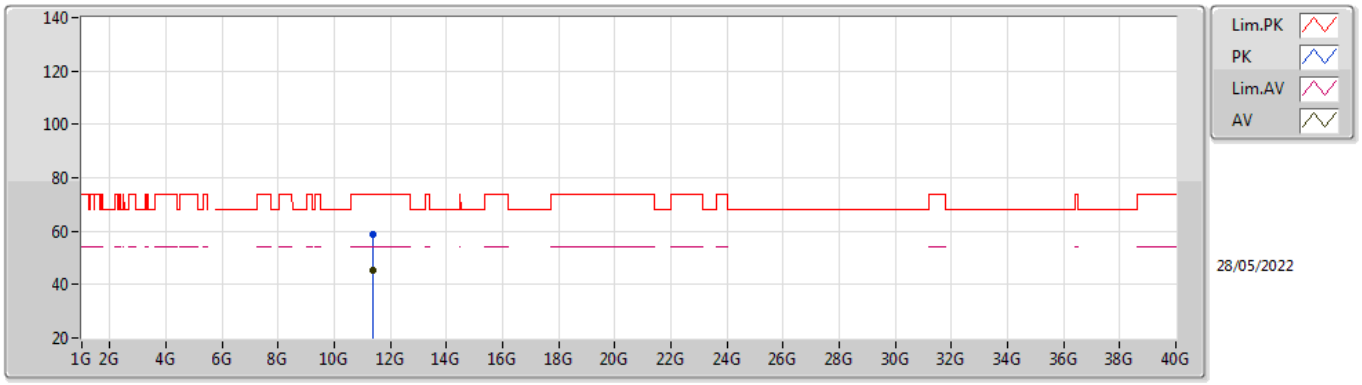


EUT X_2TX
Setting 15.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.40126G	58.84	74.00	-15.16	44.82	3	Horizontal	253	1.39	-	38.80	10.71	35.49
AV	11.4009G	45.56	54.00	-8.44	31.54	3	Horizontal	253	1.39	-	38.80	10.71	35.49

802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

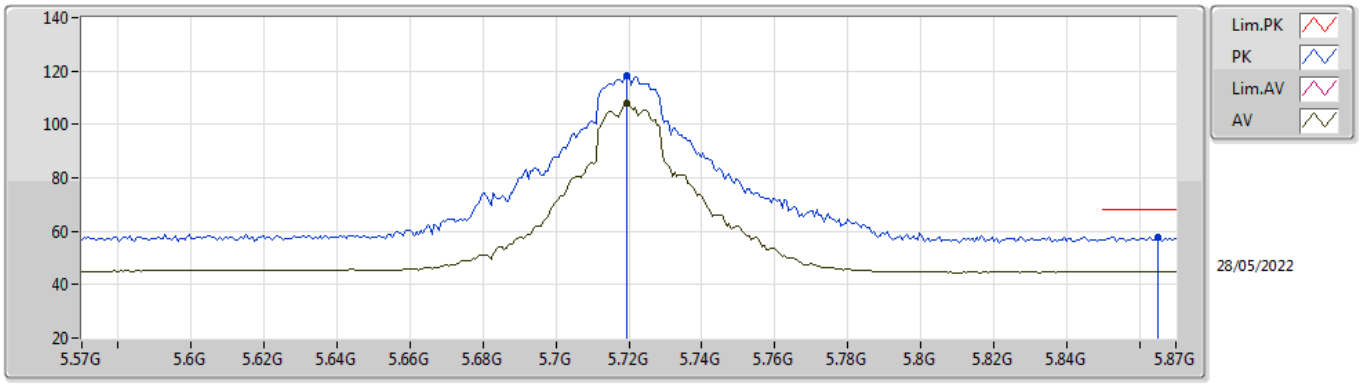


EUT X_2TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7194G	118.42	Inf	-Inf	112.22	3	Vertical	176	1.64	-	34.26	7.40	35.46
AV	5.7194G	107.84	Inf	-Inf	101.64	3	Vertical	176	1.64	-	34.26	7.40	35.46
PK	5.8652G	57.97	68.20	-10.23	51.64	3	Vertical	176	1.64	-	34.39	7.47	35.53

802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

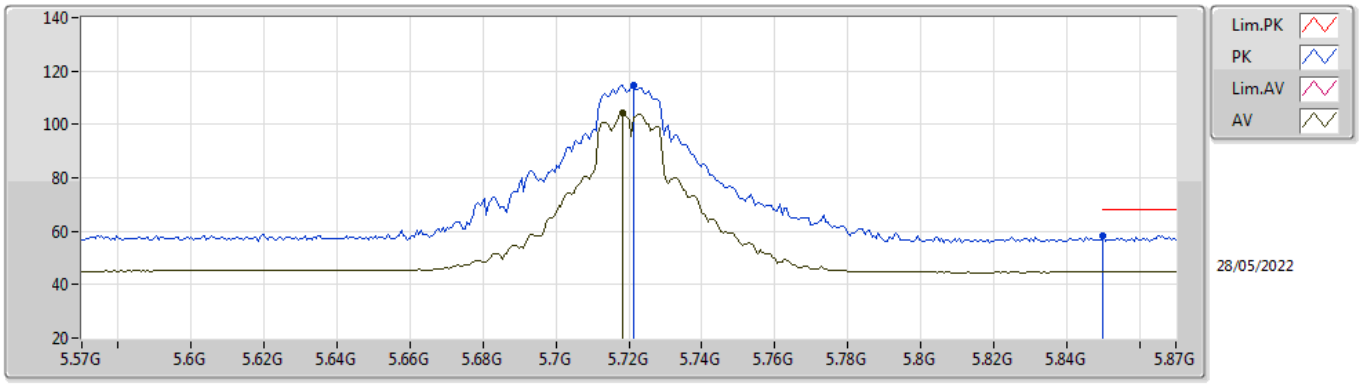


EUT X_2TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7212G	114.70	Inf	-Inf	108.50	3	Horizontal	186	3.00	-	34.26	7.40	35.46
AV	5.7182G	104.23	Inf	-Inf	98.03	3	Horizontal	186	3.00	-	34.26	7.40	35.46
PK	5.85G	58.29	68.20	-9.91	52.07	3	Horizontal	186	3.00	-	34.30	7.45	35.53

802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

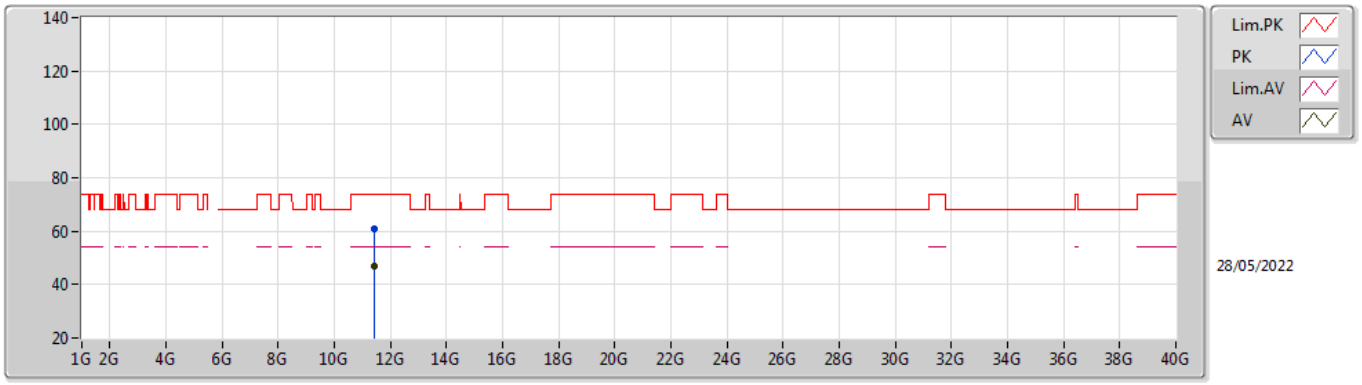


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.43976G	61.01	74.00	-12.99	46.94	3	Vertical	201	2.43	-	38.88	10.72	35.53
AV	11.43988G	46.89	54.00	-7.11	32.82	3	Vertical	201	2.43	-	38.88	10.72	35.53

802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

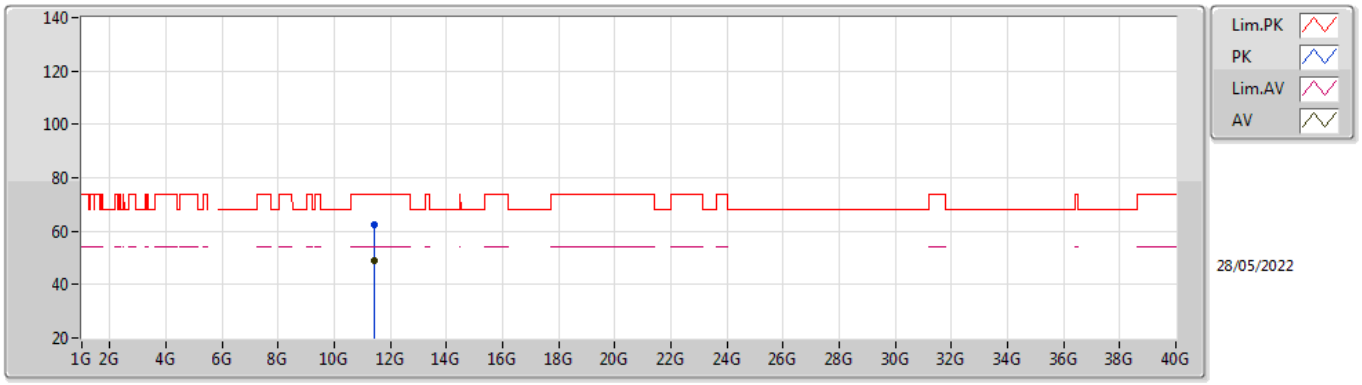


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.44126G	62.24	74.00	-11.76	48.17	3	Horizontal	141	2.08	-	38.88	10.72	35.53
AV	11.44114G	49.19	54.00	-4.81	35.12	3	Horizontal	141	2.08	-	38.88	10.72	35.53

802.11a_Nss1,(6Mbps)_2TX

5745MHz_TnomVnom

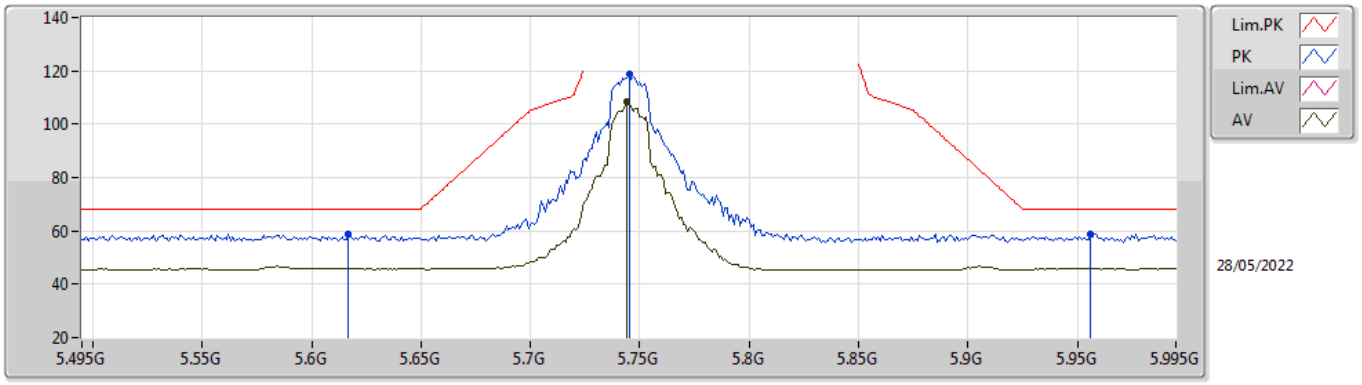


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.617G	58.83	68.20	-9.37	52.27	3	Vertical	176	1.74	-	34.57	7.40	35.41
PK	5.745G	118.98	Inf	-Inf	112.84	3	Vertical	176	1.74	-	34.21	7.40	35.47
AV	5.744G	108.28	Inf	-Inf	102.14	3	Vertical	176	1.74	-	34.21	7.40	35.47
PK	5.956G	58.81	68.20	-9.39	52.03	3	Vertical	176	1.74	-	34.80	7.56	35.58

802.11a_Nss1,(6Mbps)_2TX

5745MHz_TnomVnom

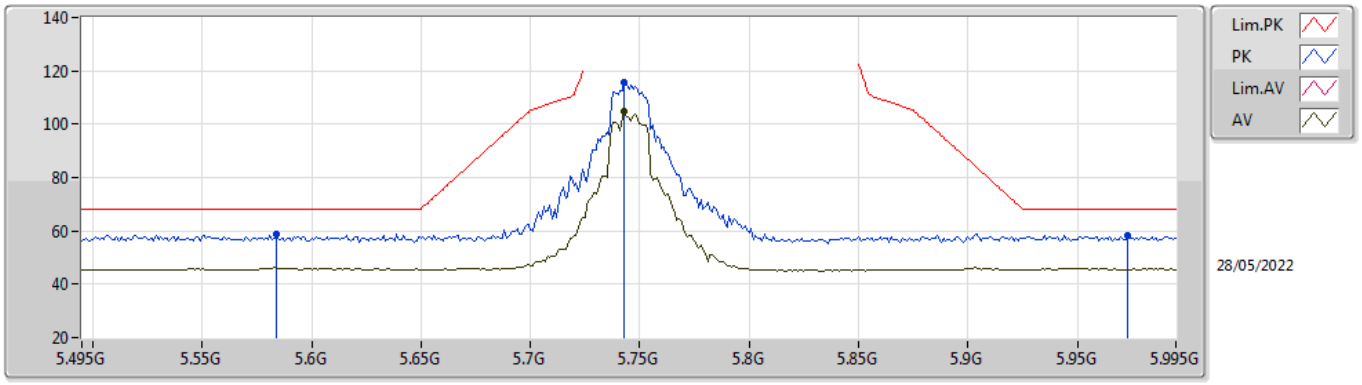


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.584G	58.75	68.20	-9.45	52.16	3	Horizontal	184	2.97	-	34.60	7.38	35.39
PK	5.743G	115.49	Inf	-Inf	109.35	3	Horizontal	184	2.97	-	34.21	7.40	35.47
AV	5.743G	104.82	Inf	-Inf	98.68	3	Horizontal	184	2.97	-	34.21	7.40	35.47
PK	5.973G	58.30	68.20	-9.90	51.52	3	Horizontal	184	2.97	-	34.80	7.57	35.59

802.11a_Nss1,(6Mbps)_2TX

5745MHz_TnomVnom

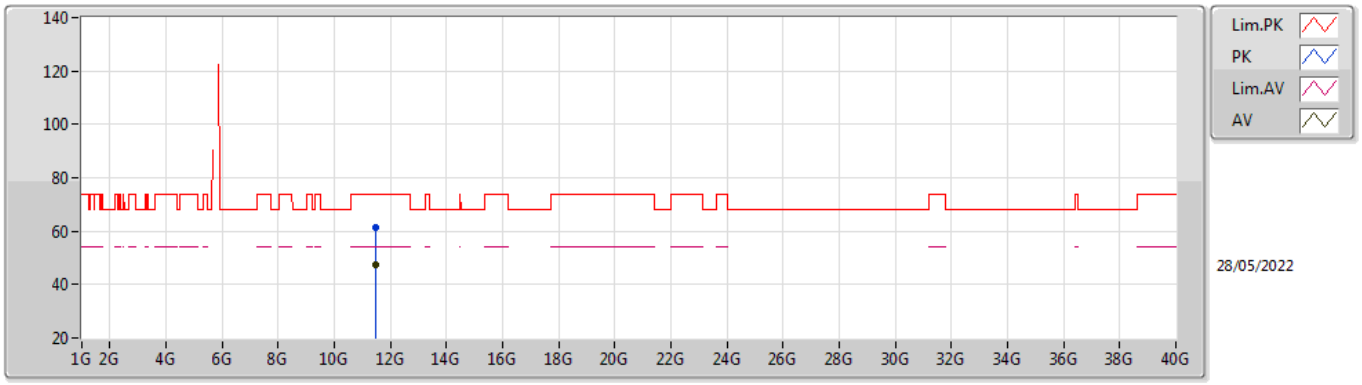


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.48988G	61.35	74.00	-12.65	47.24	3	Vertical	204	3.00	-	38.98	10.72	35.59
AV	11.49018G	47.43	54.00	-6.57	33.32	3	Vertical	204	3.00	-	38.98	10.72	35.59

802.11a_Nss1,(6Mbps)_2TX

5745MHz_TnomVnom

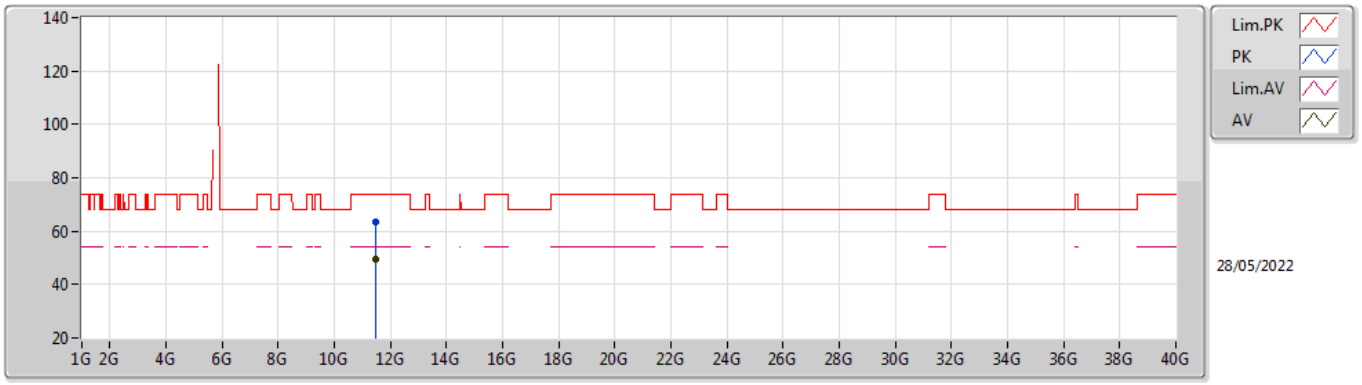


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.49114G	63.25	74.00	-10.75	49.14	3	Horizontal	139	2.06	-	38.98	10.72	35.59
AV	11.49072G	49.24	54.00	-4.76	35.13	3	Horizontal	139	2.06	-	38.98	10.72	35.59

802.11a_Nss1,(6Mbps)_2TX

5785MHz_TnomVnom

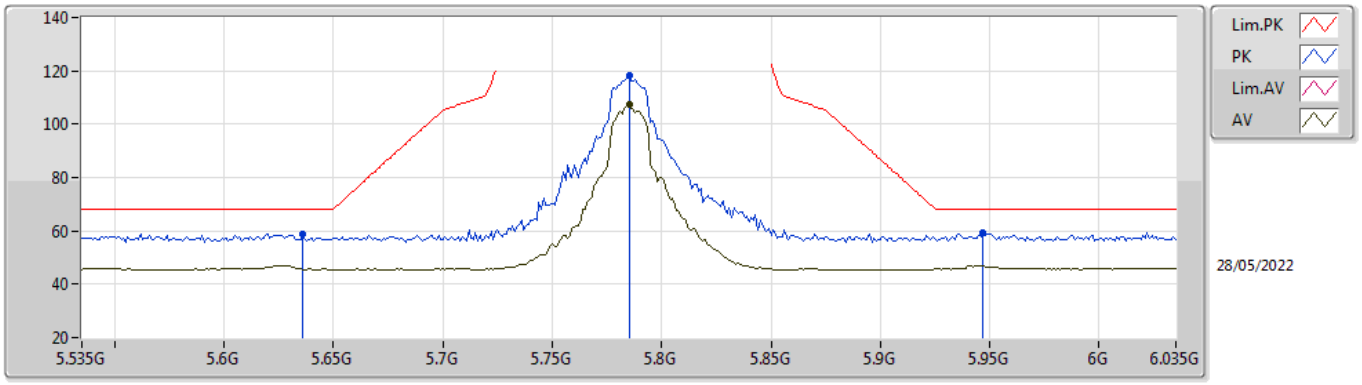


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.636G	58.95	68.20	-9.25	52.44	3	Vertical	175	1.69	-	34.53	7.40	35.42
PK	5.785G	118.50	Inf	-Inf	112.39	3	Vertical	175	1.69	-	34.20	7.40	35.49
AV	5.785G	107.59	Inf	-Inf	101.48	3	Vertical	175	1.69	-	34.20	7.40	35.49
PK	5.947G	59.30	68.20	-8.90	52.53	3	Vertical	175	1.69	-	34.79	7.55	35.57

802.11a_Nss1,(6Mbps)_2TX

5785MHz_TnomVnom

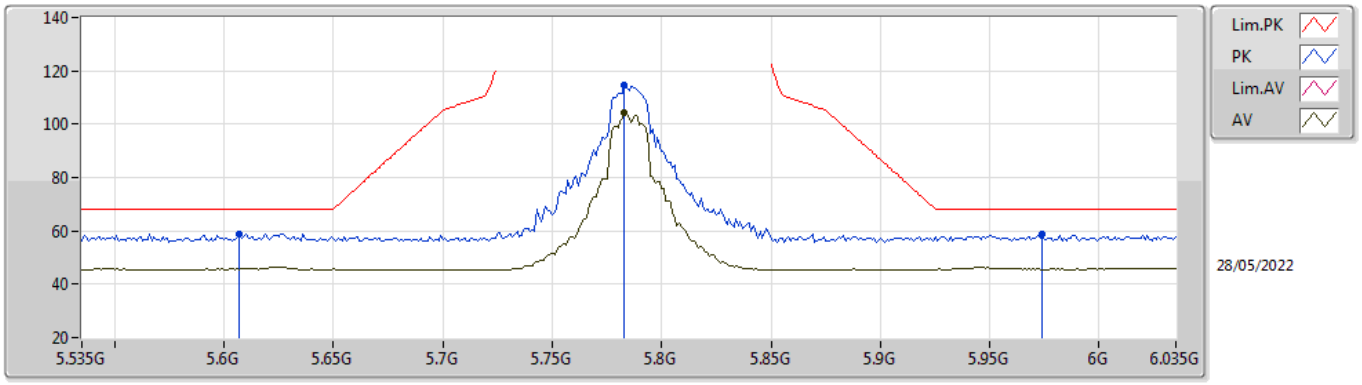


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.607G	58.82	68.20	-9.38	52.23	3	Horizontal	184	2.92	-	34.59	7.40	35.40
PK	5.783G	114.56	Inf	-Inf	108.45	3	Horizontal	184	2.92	-	34.20	7.40	35.49
AV	5.783G	104.20	Inf	-Inf	98.09	3	Horizontal	184	2.92	-	34.20	7.40	35.49
PK	5.974G	58.79	68.20	-9.41	52.01	3	Horizontal	184	2.92	-	34.80	7.57	35.59

802.11a_Nss1,(6Mbps)_2TX

5785MHz_TnomVnom

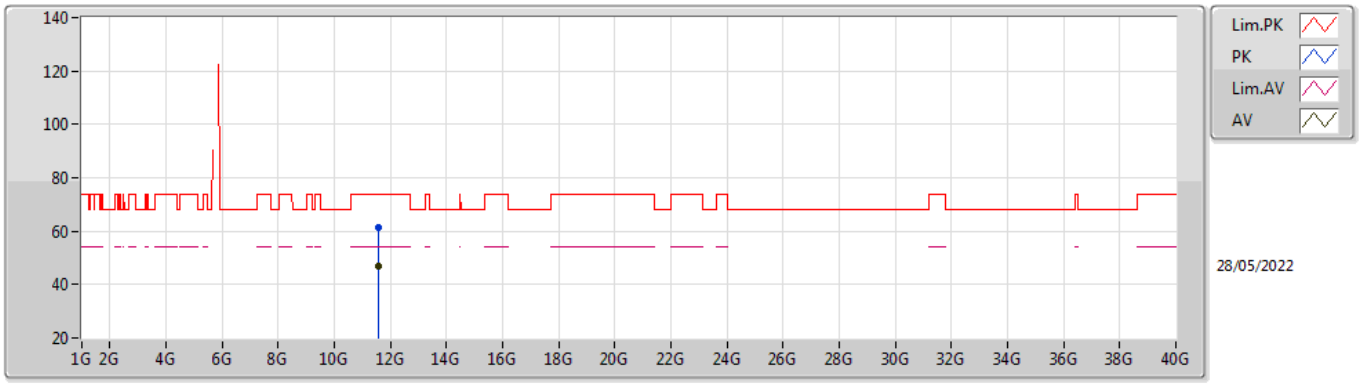


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.57036G	61.38	74.00	-12.62	46.94	3	Vertical	201	2.97	-	39.28	10.74	35.58
AV	11.57012G	47.02	54.00	-6.98	32.58	3	Vertical	201	2.97	-	39.28	10.74	35.58

802.11a_Nss1,(6Mbps)_2TX

5785MHz_TnomVnom

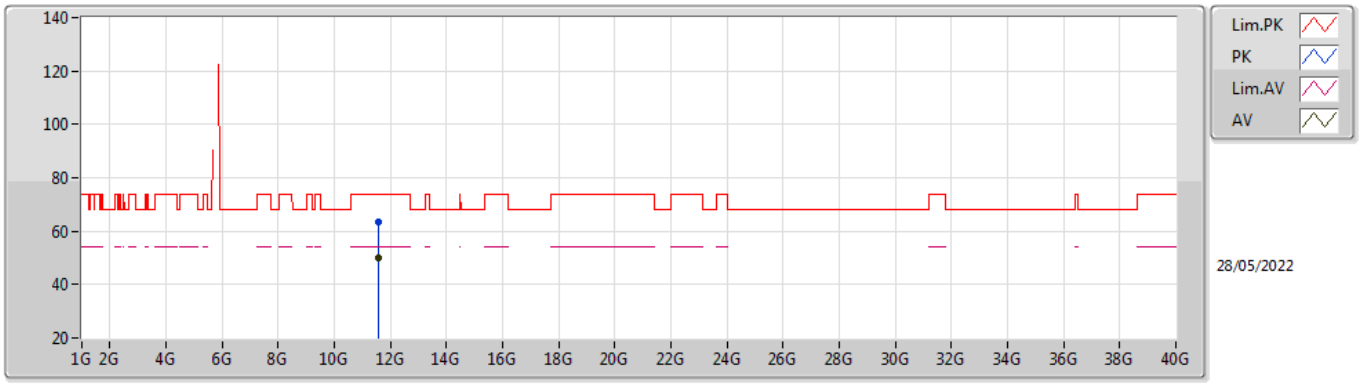


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.56982G	63.44	74.00	-10.56	49.00	3	Horizontal	200	2.08	-	39.28	10.74	35.58
AV	11.57078G	49.82	54.00	-4.18	35.38	3	Horizontal	200	2.08	-	39.28	10.74	35.58

802.11a_Nss1,(6Mbps)_2TX

5825MHz_TnomVnom

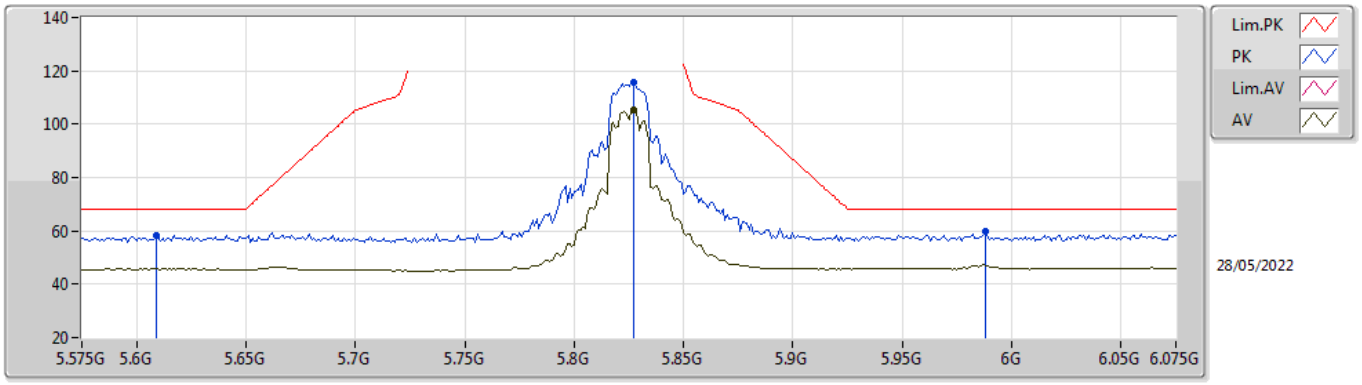


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.609G	58.27	68.20	-9.93	51.69	3	Vertical	177	1.80	-	34.58	7.40	35.40
PK	5.827G	115.59	Inf	-Inf	109.42	3	Vertical	177	1.80	-	34.25	7.43	35.51
AV	5.827G	105.59	Inf	-Inf	99.42	3	Vertical	177	1.80	-	34.25	7.43	35.51
PK	5.988G	59.71	68.20	-8.49	52.91	3	Vertical	177	1.80	-	34.80	7.59	35.59

802.11a_Nss1,(6Mbps)_2TX

5825MHz_TnomVnom

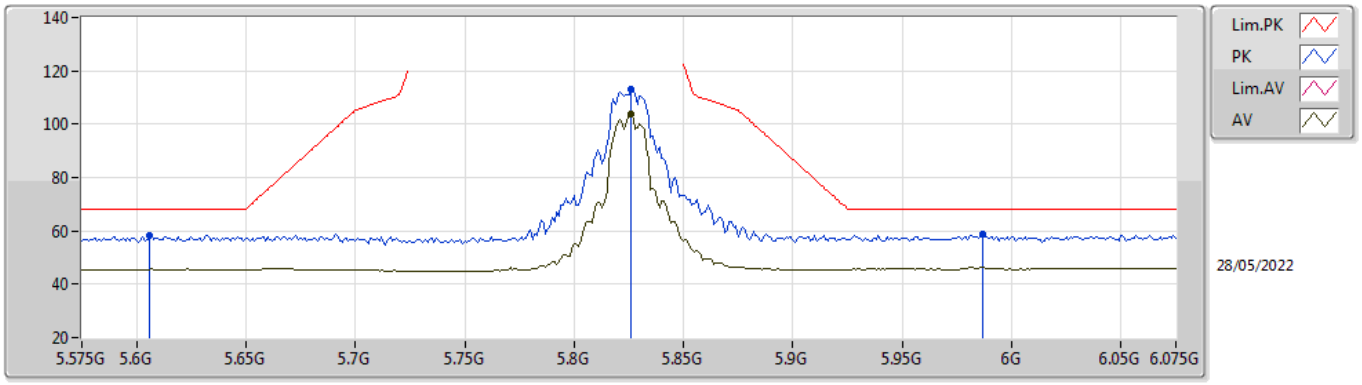


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.606G	58.27	68.20	-9.93	51.68	3	Horizontal	186	3.00	-	34.59	7.40	35.40
PK	5.826G	112.93	Inf	-Inf	106.76	3	Horizontal	186	3.00	-	34.25	7.43	35.51
AV	5.826G	103.64	Inf	-Inf	97.47	3	Horizontal	186	3.00	-	34.25	7.43	35.51
PK	5.987G	58.93	68.20	-9.27	52.13	3	Horizontal	186	3.00	-	34.80	7.59	35.59

802.11a_Nss1,(6Mbps)_2TX

5825MHz_TnomVnom

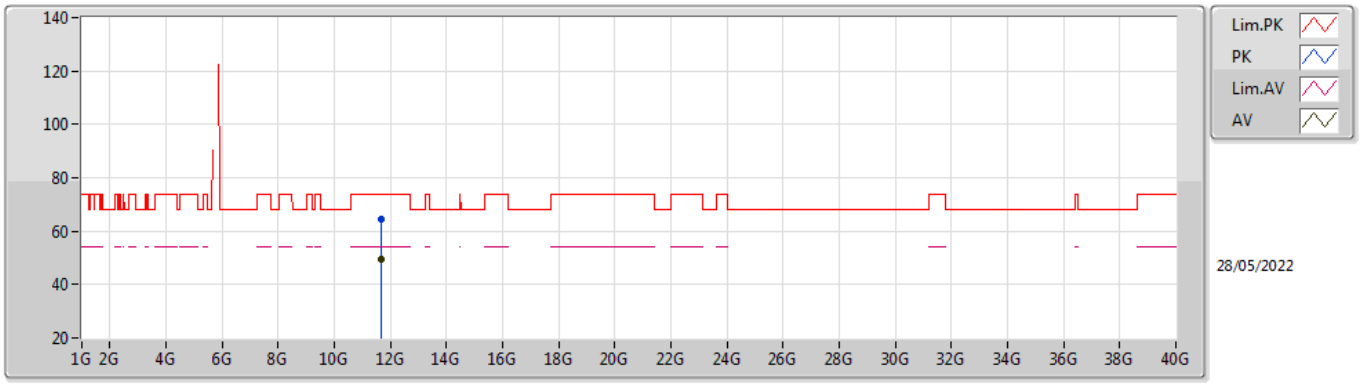


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.64994G	64.24	74.00	-9.76	49.66	3	Vertical	178	2.88	-	39.40	10.75	35.57
AV	11.64934G	49.48	54.00	-4.52	34.90	3	Vertical	178	2.88	-	39.40	10.75	35.57

802.11a_Nss1,(6Mbps)_2TX

5825MHz_TnomVnom

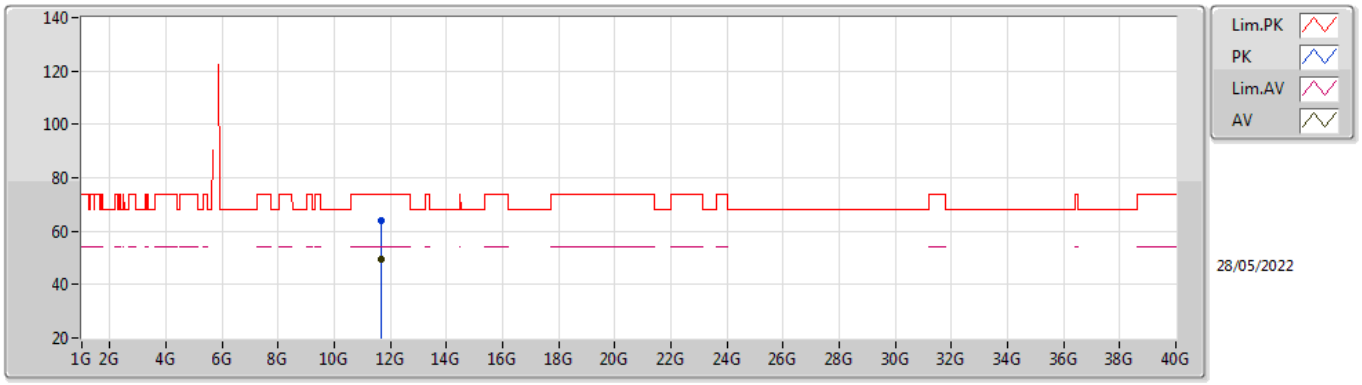


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.64976G	63.85	74.00	-10.15	49.27	3	Horizontal	200	2.10	-	39.40	10.75	35.57
AV	11.6503G	49.60	54.00	-4.40	35.02	3	Horizontal	200	2.10	-	39.40	10.75	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

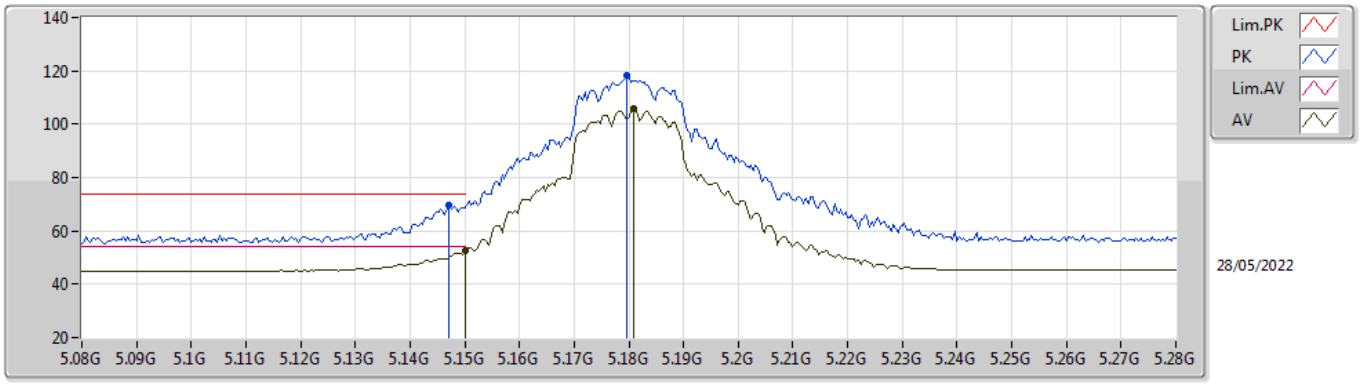


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1472G	69.57	74.00	-4.43	63.75	3	Vertical	177	2.13	-	33.99	7.17	35.34
AV	5.15G	52.33	54.00	-1.67	46.50	3	Vertical	177	2.13	-	34.00	7.17	35.34
PK	5.1796G	118.05	Inf	-Inf	112.08	3	Vertical	177	2.13	-	34.12	7.19	35.34
AV	5.1808G	105.99	Inf	-Inf	100.02	3	Vertical	177	2.13	-	34.12	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

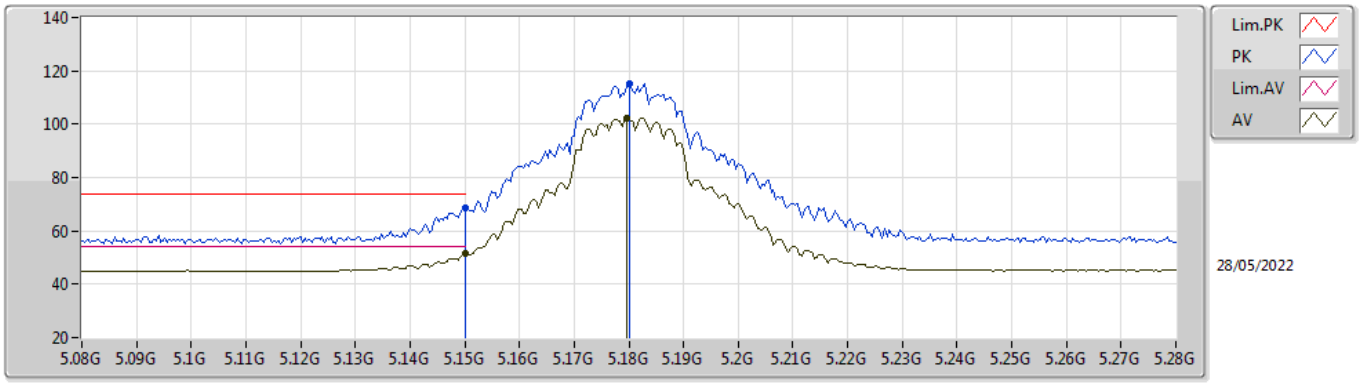


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	68.59	74.00	-5.41	62.76	3	Horizontal	191	1.80	-	34.00	7.17	35.34
AV	5.15G	51.66	54.00	-2.34	45.83	3	Horizontal	191	1.80	-	34.00	7.17	35.34
PK	5.18G	115.26	Inf	-Inf	109.29	3	Horizontal	191	1.80	-	34.12	7.19	35.34
AV	5.1796G	102.23	Inf	-Inf	96.26	3	Horizontal	191	1.80	-	34.12	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

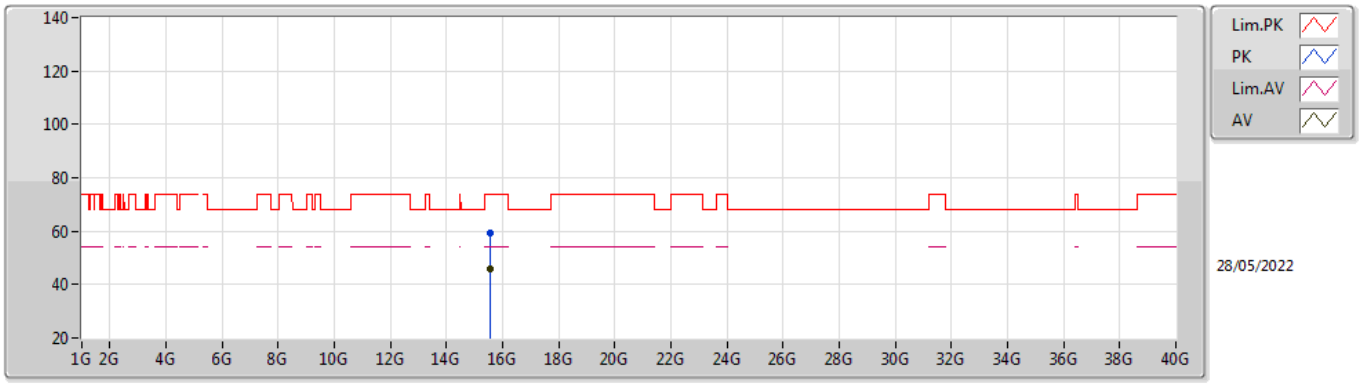


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.53304G	59.38	74.00	-14.62	43.14	3	Vertical	153	2.44	-	38.47	13.17	35.40
AV	15.54G	45.89	54.00	-8.11	29.70	3	Vertical	153	2.44	-	38.42	13.17	35.40

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

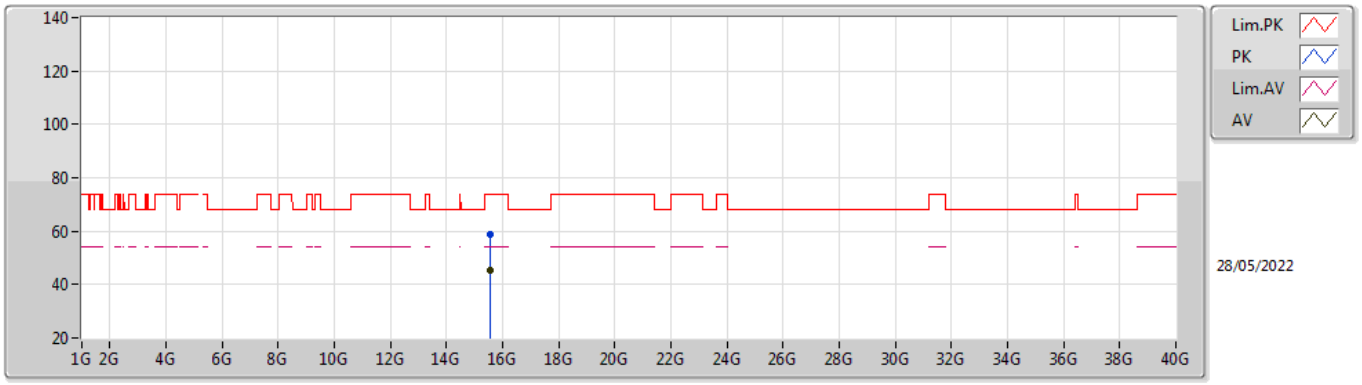


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.54312G	58.81	74.00	-15.19	42.65	3	Horizontal	137	2.50	-	38.40	13.17	35.41
AV	15.53556G	45.22	54.00	-8.78	29.00	3	Horizontal	137	2.50	-	38.45	13.17	35.40

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

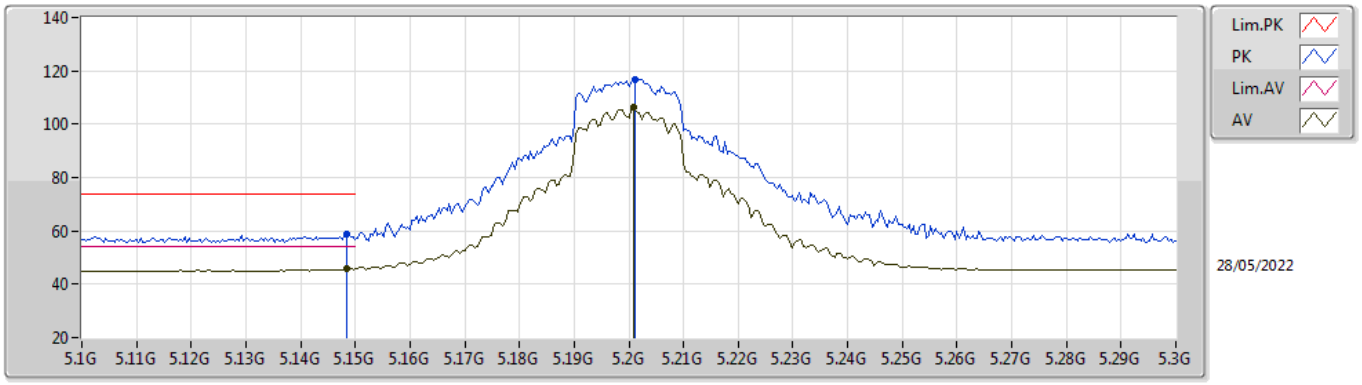


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1484G	58.99	74.00	-15.01	53.16	3	Vertical	175	1.95	-	34.00	7.17	35.34
AV	5.1484G	45.82	54.00	-8.18	39.99	3	Vertical	175	1.95	-	34.00	7.17	35.34
PK	5.2012G	116.97	Inf	-Inf	110.91	3	Vertical	175	1.95	-	34.20	7.20	35.34
AV	5.2008G	106.24	Inf	-Inf	100.18	3	Vertical	175	1.95	-	34.20	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

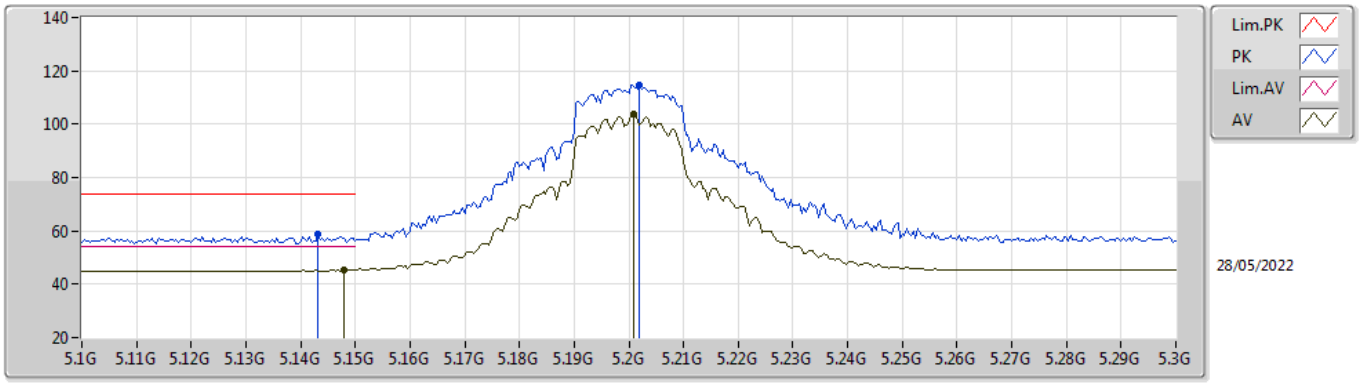


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1432G	58.54	74.00	-15.46	52.72	3	Horizontal	184	2.19	-	33.99	7.17	35.34
AV	5.148G	45.40	54.00	-8.60	39.57	3	Horizontal	184	2.19	-	34.00	7.17	35.34
PK	5.202G	114.46	Inf	-Inf	108.39	3	Horizontal	184	2.19	-	34.21	7.20	35.34
AV	5.2008G	103.82	Inf	-Inf	97.76	3	Horizontal	184	2.19	-	34.20	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

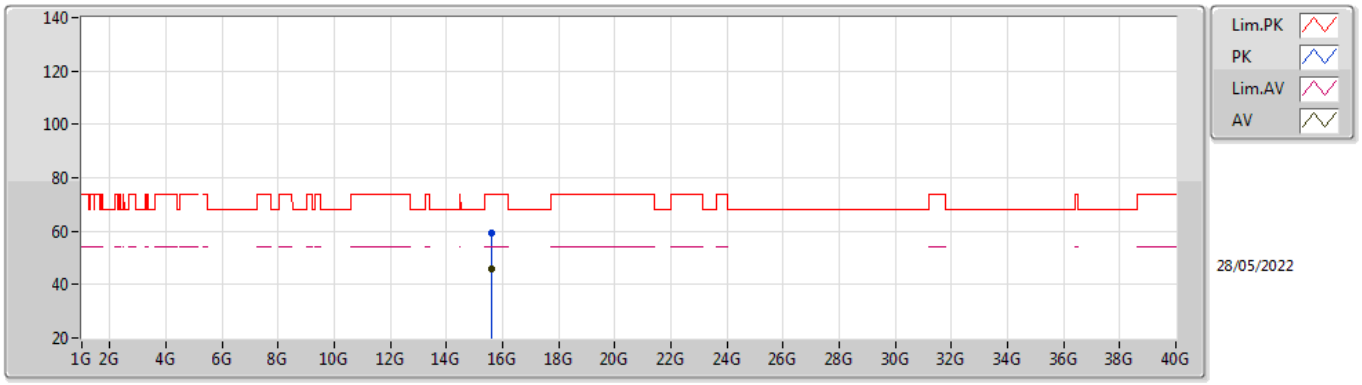


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.59628G	59.29	74.00	-14.71	43.51	3	Vertical	149	2.32	-	38.03	13.20	35.45
AV	15.59628G	45.82	54.00	-8.18	30.04	3	Vertical	149	2.32	-	38.03	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

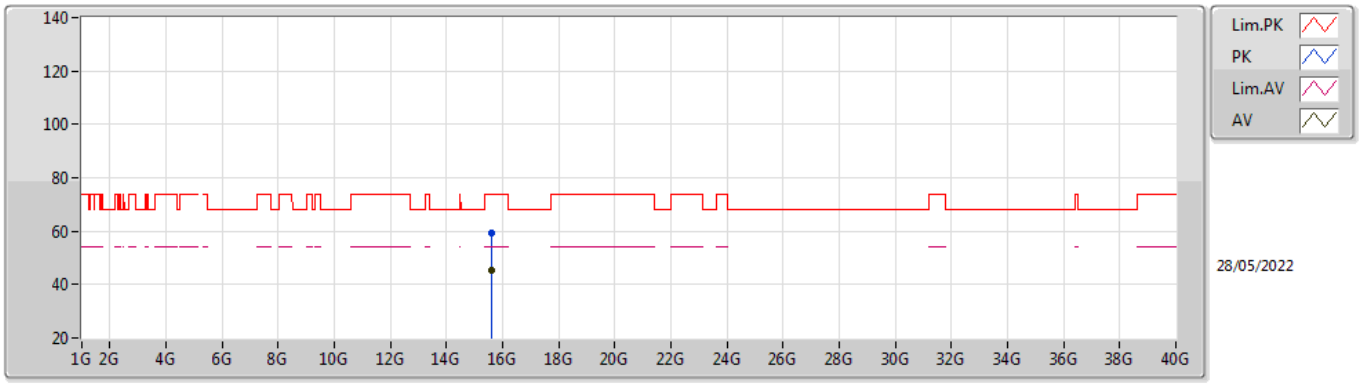


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.60624G	59.50	74.00	-14.50	43.79	3	Horizontal	282	1.80	-	37.97	13.20	35.46
AV	15.59598G	45.47	54.00	-8.53	29.69	3	Horizontal	282	1.80	-	38.03	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

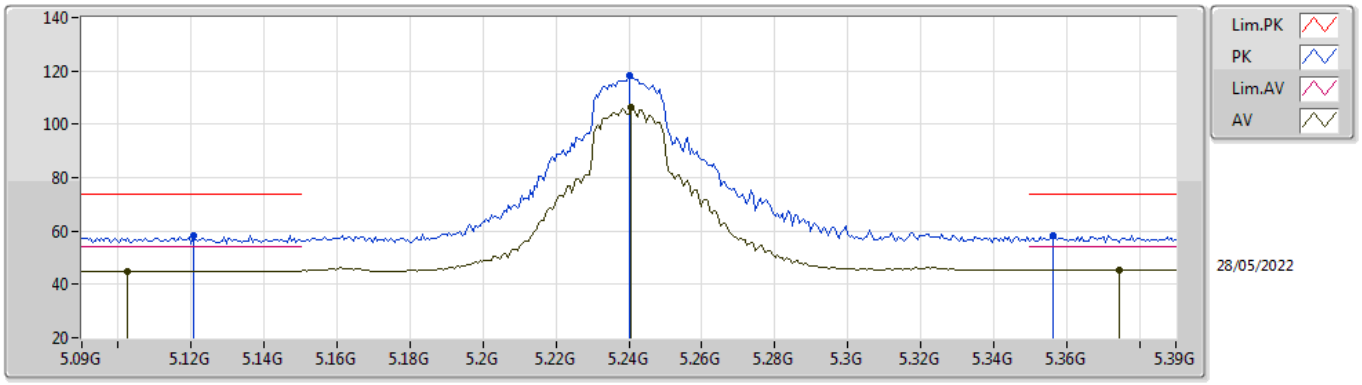


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1206G	58.50	74.00	-15.50	52.73	3	Vertical	176	2.01	-	33.94	7.16	35.33
AV	5.1026G	45.06	54.00	-8.94	39.33	3	Vertical	176	2.01	-	33.91	7.15	35.33
PK	5.24G	118.13	Inf	-Inf	111.91	3	Vertical	176	2.01	-	34.36	7.20	35.34
AV	5.2406G	106.60	Inf	-Inf	100.38	3	Vertical	176	2.01	-	34.36	7.20	35.34
PK	5.3564G	58.52	74.00	-15.48	52.15	3	Vertical	176	2.01	-	34.51	7.20	35.34
AV	5.3744G	45.45	54.00	-8.55	39.04	3	Vertical	176	2.01	-	34.55	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

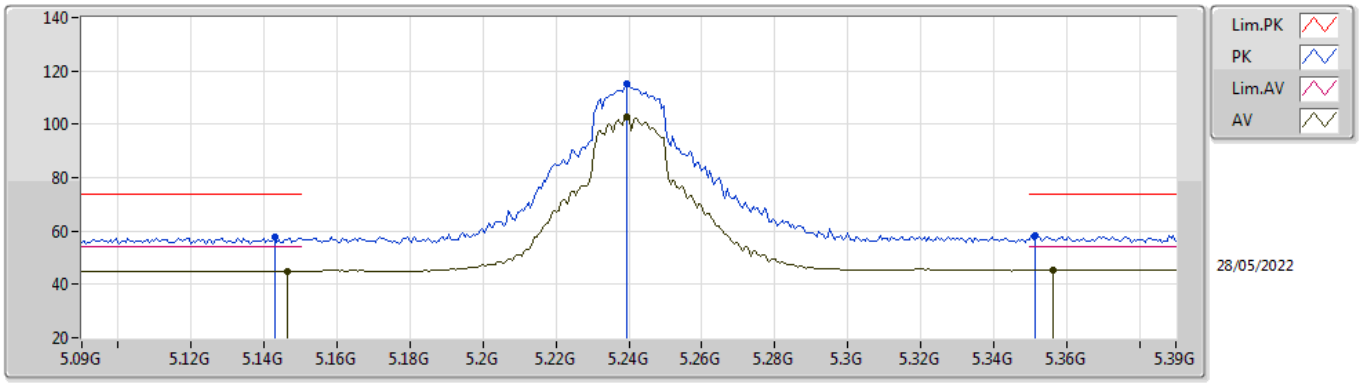


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1428G	57.97	74.00	-16.03	52.15	3	Horizontal	201	2.01	-	33.99	7.17	35.34
AV	5.1464G	45.04	54.00	-8.96	39.22	3	Horizontal	201	2.01	-	33.99	7.17	35.34
PK	5.2394G	115.32	Inf	-Inf	109.10	3	Horizontal	201	2.01	-	34.36	7.20	35.34
AV	5.2394G	102.96	Inf	-Inf	96.74	3	Horizontal	201	2.01	-	34.36	7.20	35.34
PK	5.3516G	58.19	74.00	-15.81	51.83	3	Horizontal	201	2.01	-	34.50	7.20	35.34
AV	5.3564G	45.36	54.00	-8.64	38.99	3	Horizontal	201	2.01	-	34.51	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

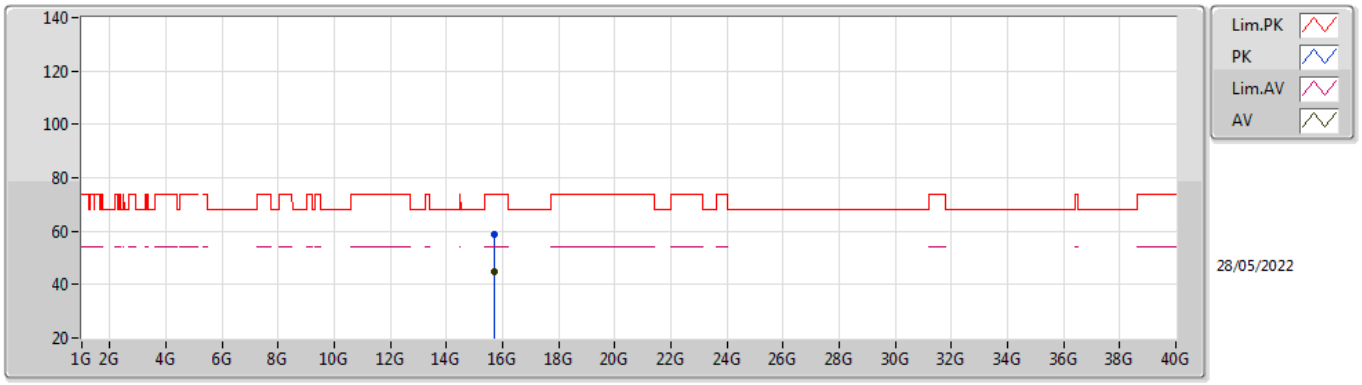


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.72138G	58.63	74.00	-15.37	43.34	3	Vertical	152	2.42	-	37.59	13.26	35.56
AV	15.72006G	45.00	54.00	-9.00	29.71	3	Vertical	152	2.42	-	37.58	13.26	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

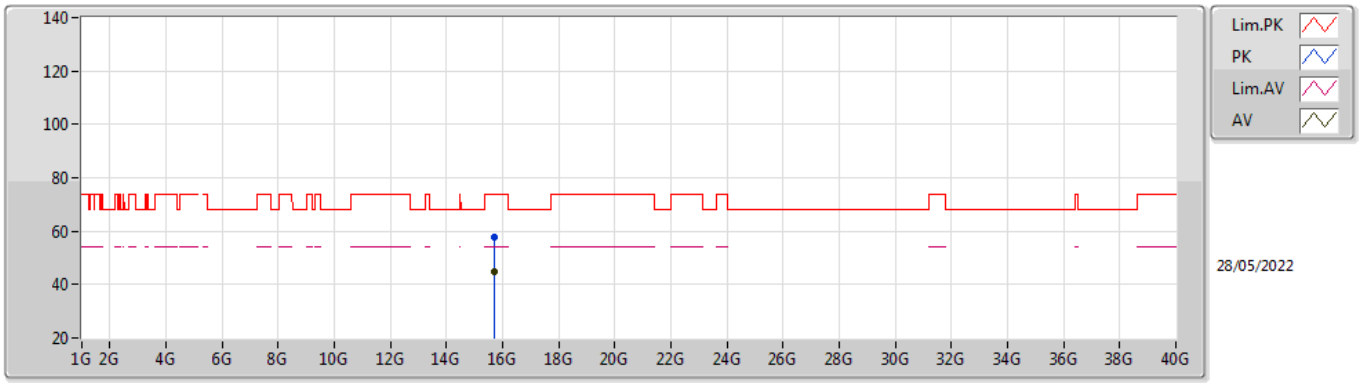


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.72528G	58.00	74.00	-16.00	42.70	3	Horizontal	269	1.80	-	37.60	13.26	35.56
AV	15.72186G	44.77	54.00	-9.23	29.48	3	Horizontal	269	1.80	-	37.59	13.26	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

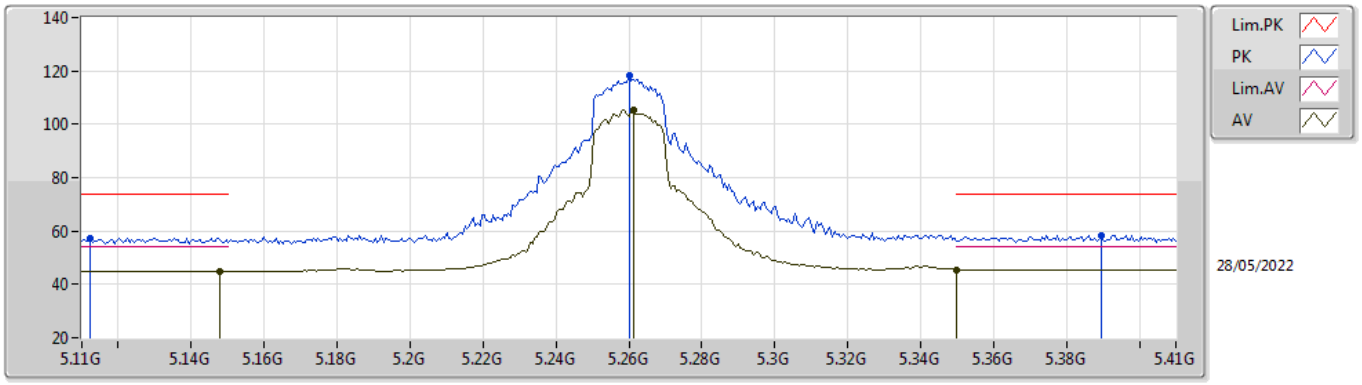


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1124G	57.30	74.00	-16.70	51.55	3	Vertical	175	1.89	-	33.92	7.16	35.33
AV	5.1478G	44.98	54.00	-9.02	39.15	3	Vertical	175	1.89	-	34.00	7.17	35.34
PK	5.26G	118.52	Inf	-Inf	112.24	3	Vertical	175	1.89	-	34.42	7.20	35.34
AV	5.2612G	105.56	Inf	-Inf	99.28	3	Vertical	175	1.89	-	34.42	7.20	35.34
PK	5.3896G	58.38	74.00	-15.62	51.95	3	Vertical	175	1.89	-	34.58	7.20	35.35
AV	5.35G	45.55	54.00	-8.45	39.19	3	Vertical	175	1.89	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

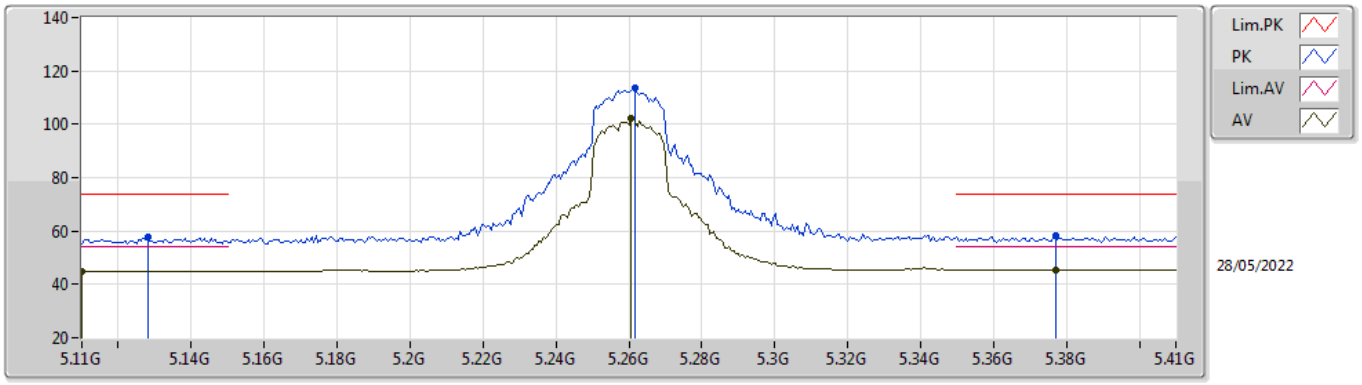


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.128G	57.59	74.00	-16.41	51.81	3	Horizontal	200	2.05	-	33.96	7.16	35.34
AV	5.11G	44.99	54.00	-9.01	39.24	3	Horizontal	200	2.05	-	33.92	7.16	35.33
PK	5.2618G	113.67	Inf	-Inf	107.39	3	Horizontal	200	2.05	-	34.42	7.20	35.34
AV	5.2606G	102.04	Inf	-Inf	95.76	3	Horizontal	200	2.05	-	34.42	7.20	35.34
PK	5.377G	58.45	74.00	-15.55	52.05	3	Horizontal	200	2.05	-	34.55	7.20	35.35
AV	5.377G	45.42	54.00	-8.58	39.02	3	Horizontal	200	2.05	-	34.55	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

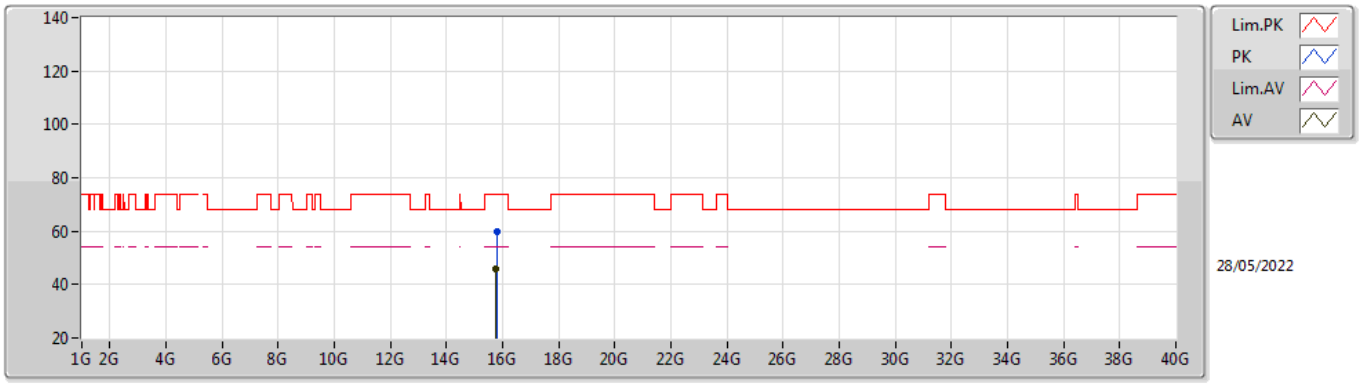


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.77964G	60.08	74.00	-13.92	44.57	3	Vertical	198	2.98	-	37.82	13.29	35.60
AV	15.77748G	45.85	54.00	-8.15	30.35	3	Vertical	198	2.98	-	37.81	13.29	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

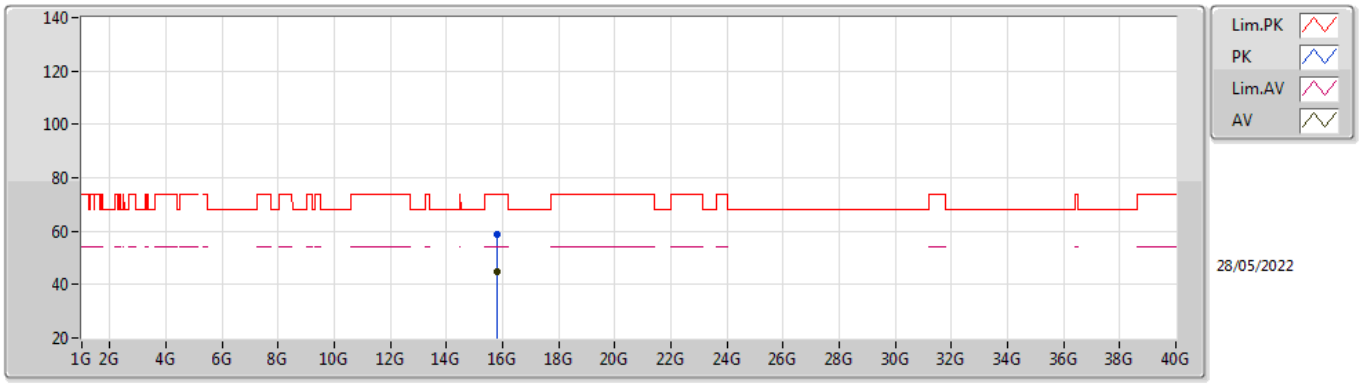


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.78078G	58.65	74.00	-15.35	43.15	3	Horizontal	283	1.80	-	37.82	13.29	35.61
AV	15.7821G	44.98	54.00	-9.02	29.47	3	Horizontal	283	1.80	-	37.83	13.29	35.61

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

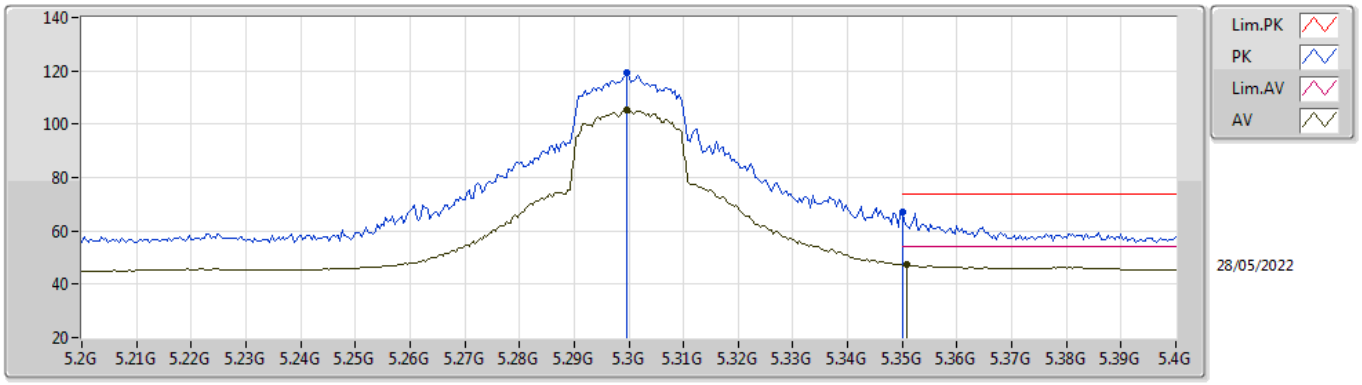


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2996G	119.06	Inf	-Inf	112.70	3	Vertical	179	2.07	-	34.50	7.20	35.34
AV	5.2996G	105.38	Inf	-Inf	99.02	3	Vertical	179	2.07	-	34.50	7.20	35.34
PK	5.35G	66.95	74.00	-7.05	60.59	3	Vertical	179	2.07	-	34.50	7.20	35.34
AV	5.3508G	47.21	54.00	-6.79	40.85	3	Vertical	179	2.07	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

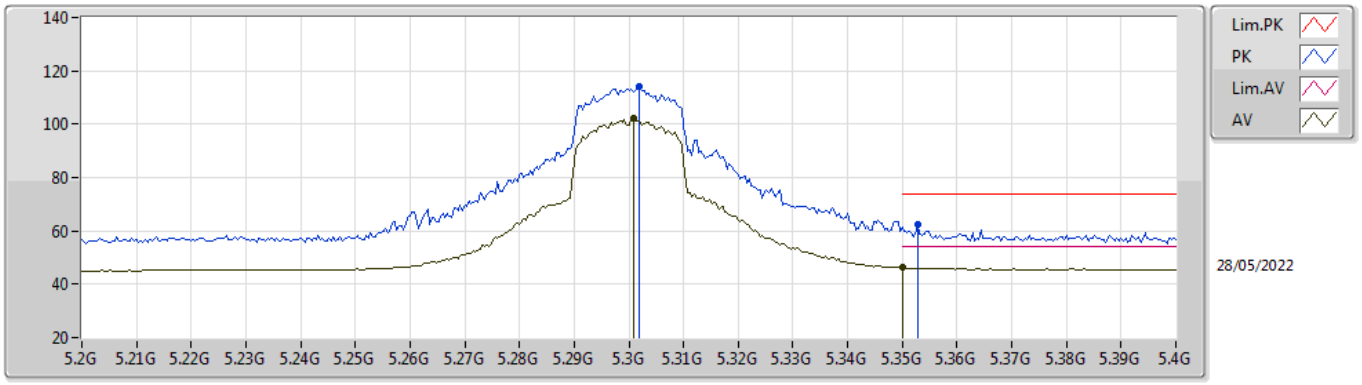


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.302G	114.00	Inf	-Inf	107.64	3	Horizontal	200	2.12	-	34.50	7.20	35.34
AV	5.3008G	102.21	Inf	-Inf	95.85	3	Horizontal	200	2.12	-	34.50	7.20	35.34
PK	5.3528G	62.46	74.00	-11.54	56.09	3	Horizontal	200	2.12	-	34.51	7.20	35.34
AV	5.35G	46.30	54.00	-7.70	39.94	3	Horizontal	200	2.12	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

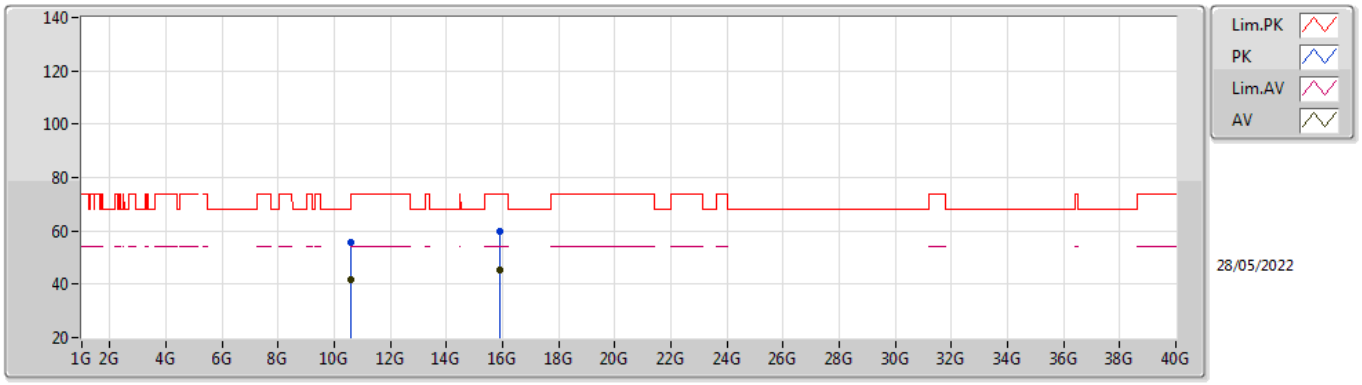


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60396G	55.44	74.00	-18.56	42.02	3	Vertical	205	1.80	-	38.21	10.59	35.38
AV	10.60153G	41.63	54.00	-12.37	28.22	3	Vertical	205	1.80	-	38.20	10.59	35.38
PK	15.9063G	59.65	74.00	-14.35	44.42	3	Vertical	199	2.97	-	37.59	13.35	35.71
AV	15.8985G	45.56	54.00	-8.44	30.31	3	Vertical	199	2.97	-	37.60	13.35	35.70

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

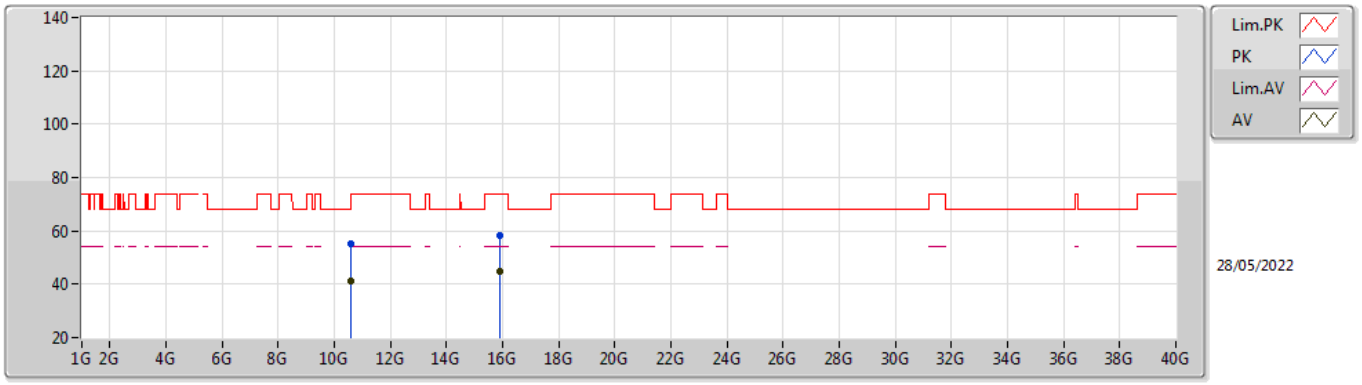


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60256G	55.07	74.00	-18.93	41.65	3	Horizontal	79	2.78	-	38.21	10.59	35.38
AV	10.60225G	41.20	54.00	-12.80	27.79	3	Horizontal	79	2.78	-	38.20	10.59	35.38
PK	15.89754G	58.51	74.00	-15.49	43.25	3	Horizontal	260	1.80	-	37.61	13.35	35.70
AV	15.9006G	44.83	54.00	-9.17	29.59	3	Horizontal	260	1.80	-	37.60	13.35	35.71

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

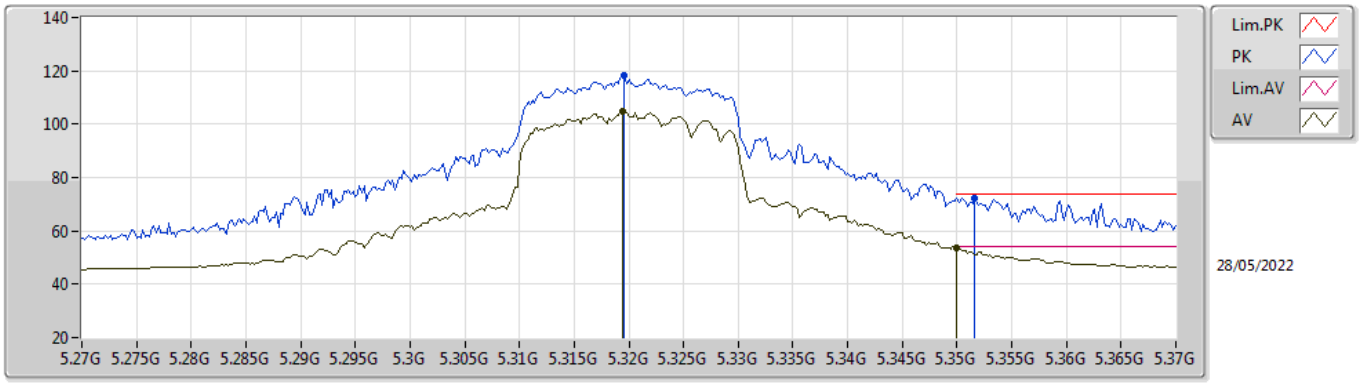


EUT X_2TX
Setting 17.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3196G	118.34	Inf	-Inf	111.98	3	Vertical	178	1.95	-	34.50	7.20	35.34
AV	5.3194G	104.83	Inf	-Inf	98.47	3	Vertical	178	1.95	-	34.50	7.20	35.34
PK	5.3516G	72.49	74.00	-1.51	66.13	3	Vertical	178	1.95	-	34.50	7.20	35.34
AV	5.35G	53.80	54.00	-0.20	47.44	3	Vertical	178	1.95	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

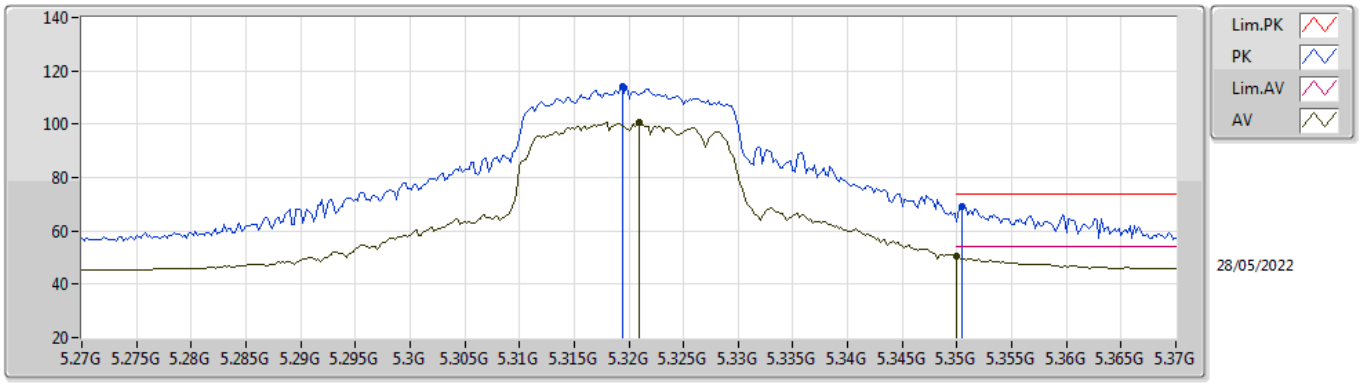


EUT X_2TX
Setting 17.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3194G	114.25	Inf	-Inf	107.89	3	Horizontal	201	1.97	-	34.50	7.20	35.34
AV	5.321G	100.89	Inf	-Inf	94.53	3	Horizontal	201	1.97	-	34.50	7.20	35.34
PK	5.3504G	69.05	74.00	-4.95	62.69	3	Horizontal	201	1.97	-	34.50	7.20	35.34
AV	5.35G	50.31	54.00	-3.69	43.95	3	Horizontal	201	1.97	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

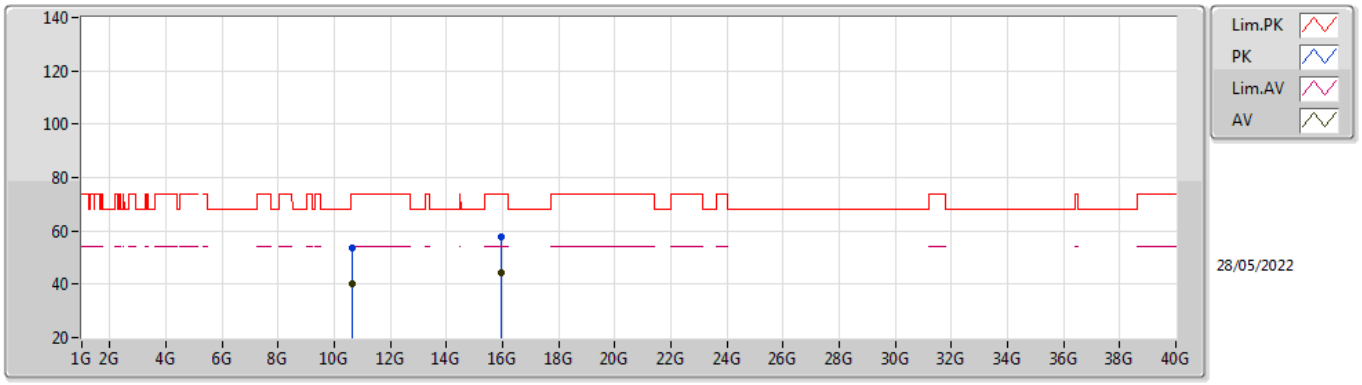


EUT X_2TX
Setting 17.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.64804G	53.85	74.00	-20.15	40.29	3	Vertical	360	2.39	-	38.30	10.60	35.34
AV	10.64132G	40.03	54.00	-13.97	26.50	3	Vertical	360	2.39	-	38.28	10.60	35.35
PK	15.95166G	57.63	74.00	-16.37	42.50	3	Vertical	184	2.33	-	37.50	13.38	35.75
AV	15.97404G	44.31	54.00	-9.69	29.24	3	Vertical	184	2.33	-	37.45	13.39	35.77

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

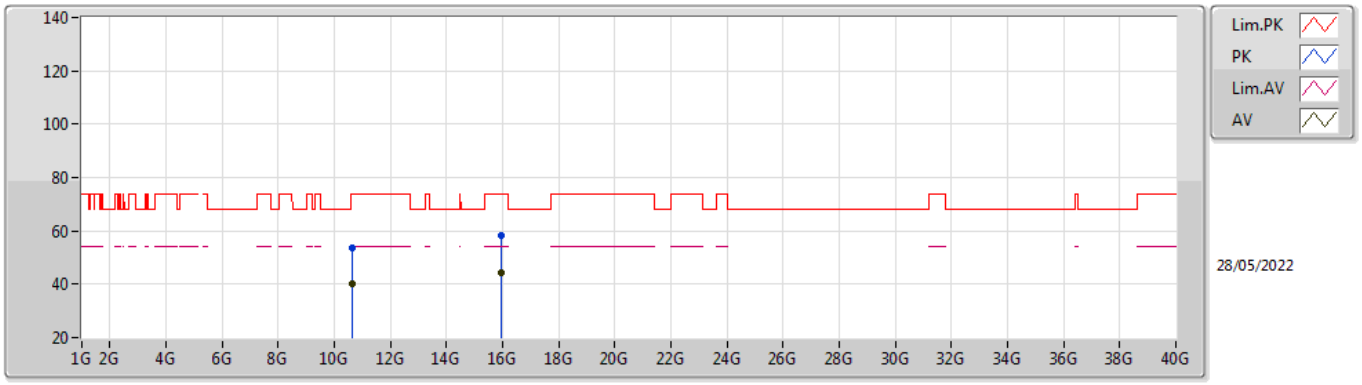


EUT X_2TX
Setting 17.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.63688G	53.46	74.00	-20.54	39.94	3	Horizontal	121	1.31	-	38.27	10.60	35.35
AV	10.64168G	40.01	54.00	-13.99	26.48	3	Horizontal	121	1.31	-	38.28	10.60	35.35
PK	15.96558G	58.15	74.00	-15.85	43.06	3	Horizontal	19	1.34	-	37.47	13.38	35.76
AV	15.9699G	44.16	54.00	-9.84	29.08	3	Horizontal	19	1.34	-	37.46	13.38	35.76

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

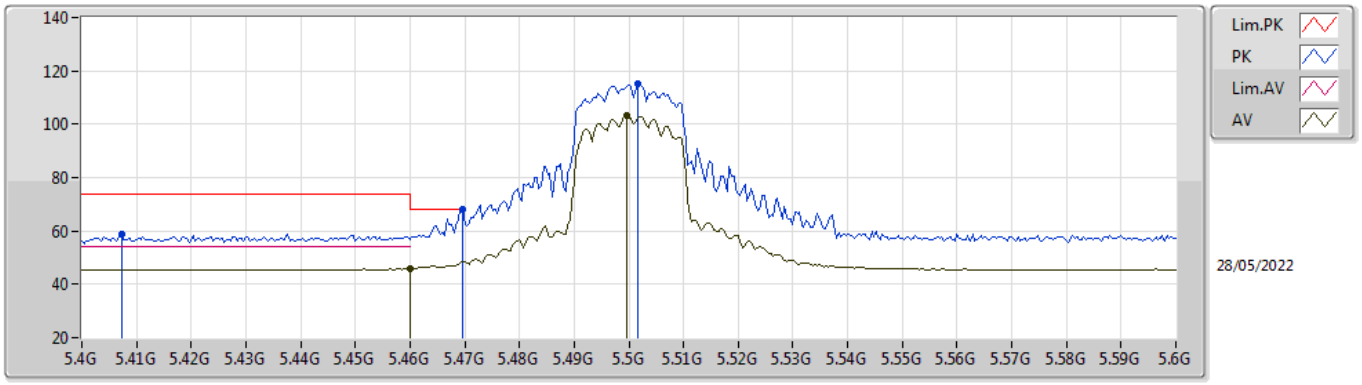


EUT X_2TX
Setting 17
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4072G	58.84	74.00	-15.16	52.39	3	Vertical	178	1.76	-	34.59	7.21	35.35
PK	5.4696G	68.03	68.20	-0.17	61.57	3	Vertical	178	1.76	-	34.54	7.27	35.35
AV	5.46G	45.75	54.00	-8.25	39.32	3	Vertical	178	1.76	-	34.52	7.26	35.35
PK	5.5016G	115.36	Inf	-Inf	108.81	3	Vertical	178	1.76	-	34.60	7.30	35.35
AV	5.4996G	103.46	Inf	-Inf	96.91	3	Vertical	178	1.76	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

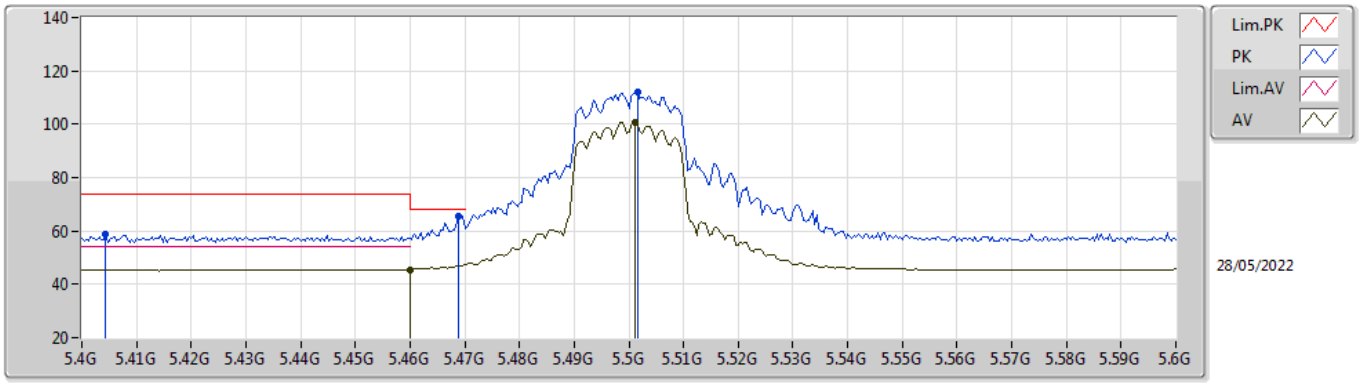


EUT X_2TX
Setting 17
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4044G	58.86	74.00	-15.14	52.42	3	Horizontal	191	3.00	-	34.59	7.20	35.35
PK	5.4688G	65.38	68.20	-2.82	58.92	3	Horizontal	191	3.00	-	34.54	7.27	35.35
AV	5.46G	45.56	54.00	-8.44	39.13	3	Horizontal	191	3.00	-	34.52	7.26	35.35
PK	5.5016G	112.11	Inf	-Inf	105.56	3	Horizontal	191	3.00	-	34.60	7.30	35.35
AV	5.5012G	100.76	Inf	-Inf	94.21	3	Horizontal	191	3.00	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

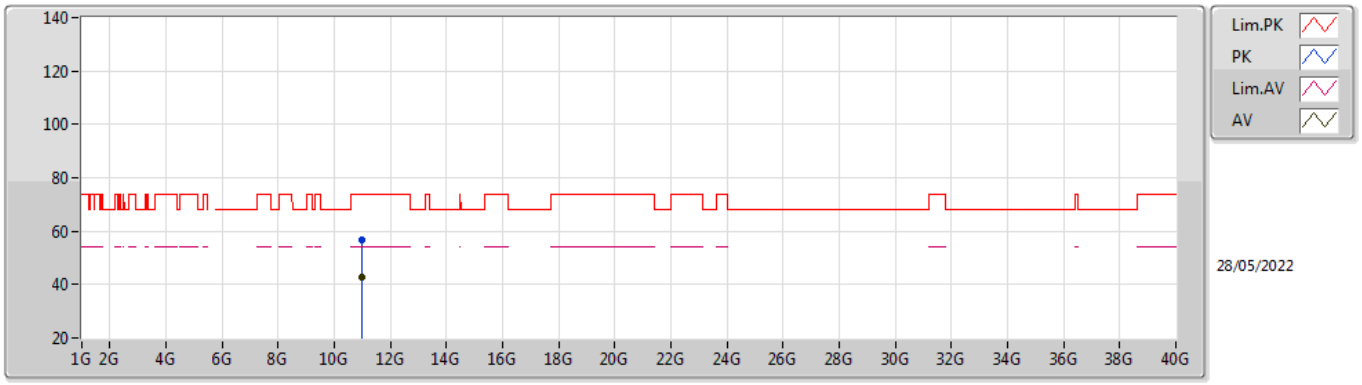


EUT X_2TX
Setting 17
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.99916G	56.60	74.00	-17.40	42.59	3	Vertical	225	1.80	-	38.40	10.65	35.04
AV	11.00186G	42.65	54.00	-11.35	28.64	3	Vertical	225	1.80	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

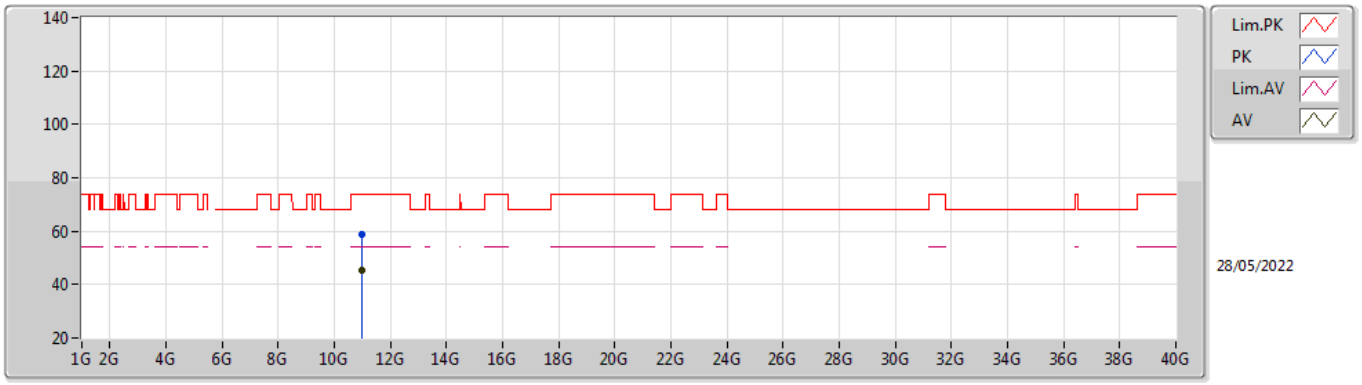


EUT X_2TX
Setting 17
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9997G	58.87	74.00	-15.13	44.86	3	Horizontal	42	1.18	-	38.40	10.65	35.04
AV	10.99982G	45.43	54.00	-8.57	31.42	3	Horizontal	42	1.18	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

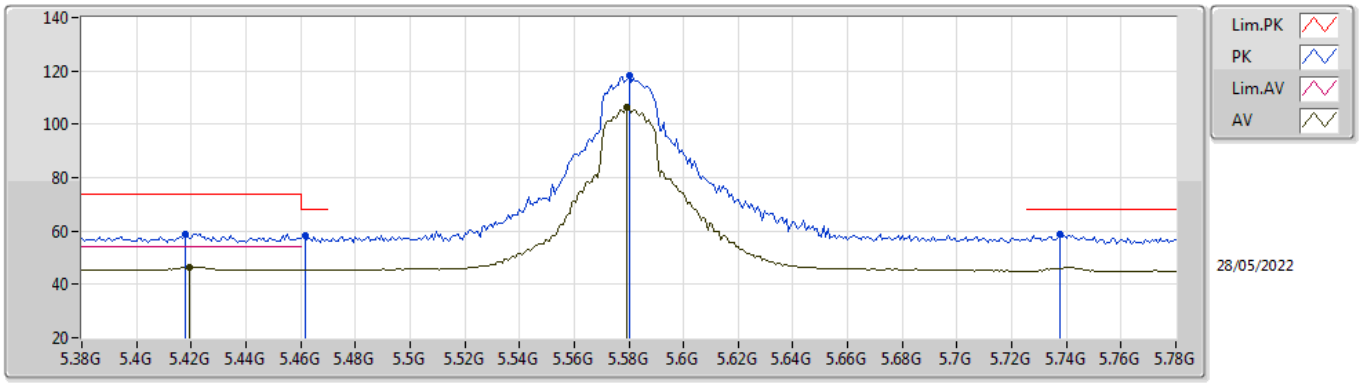


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4176G	58.78	74.00	-15.22	52.35	3	Vertical	176	1.74	-	34.56	7.22	35.35
AV	5.4192G	46.63	54.00	-7.37	40.20	3	Vertical	176	1.74	-	34.56	7.22	35.35
PK	5.4616G	58.02	68.20	-10.18	51.59	3	Vertical	176	1.74	-	34.52	7.26	35.35
PK	5.58G	118.42	Inf	-Inf	111.83	3	Vertical	176	1.74	-	34.60	7.38	35.39
AV	5.5792G	106.44	Inf	-Inf	99.85	3	Vertical	176	1.74	-	34.60	7.38	35.39
PK	5.7376G	58.65	68.20	-9.55	52.50	3	Vertical	176	1.74	-	34.22	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

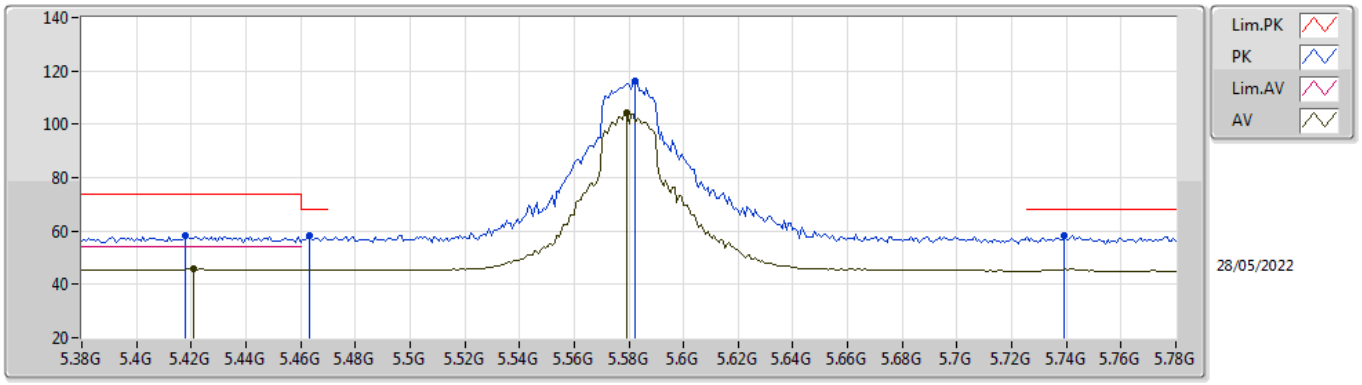


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4176G	58.20	74.00	-15.80	51.77	3	Horizontal	189	2.95	-	34.56	7.22	35.35
AV	5.4208G	45.78	54.00	-8.22	39.35	3	Horizontal	189	2.95	-	34.56	7.22	35.35
PK	5.4632G	58.02	68.20	-10.18	51.58	3	Horizontal	189	2.95	-	34.53	7.26	35.35
PK	5.5824G	116.06	Inf	-Inf	109.47	3	Horizontal	189	2.95	-	34.60	7.38	35.39
AV	5.5792G	104.41	Inf	-Inf	97.82	3	Horizontal	189	2.95	-	34.60	7.38	35.39
PK	5.7392G	58.11	68.20	-10.09	51.96	3	Horizontal	189	2.95	-	34.22	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

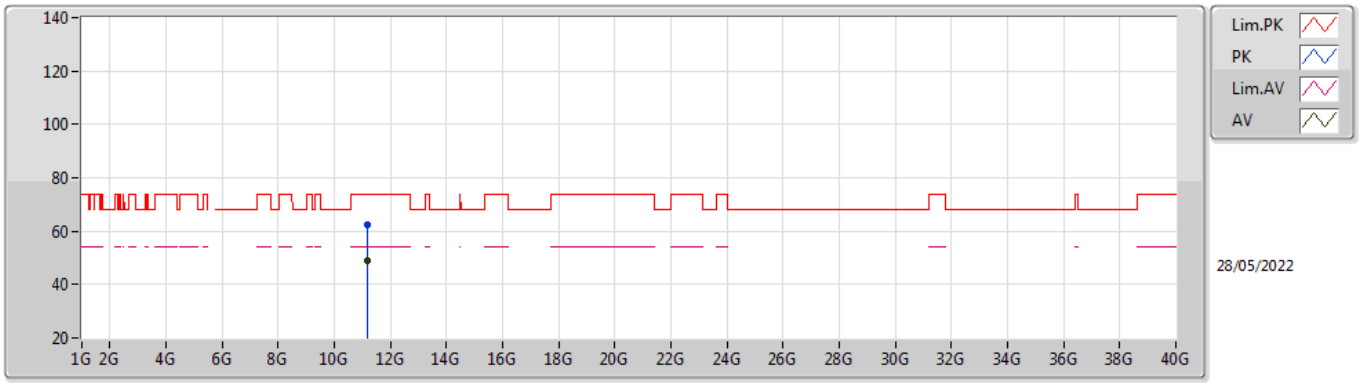


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1621G	62.39	74.00	-11.61	48.38	3	Vertical	199	1.00	-	38.56	10.67	35.22
AV	11.15958G	48.98	54.00	-5.02	34.97	3	Vertical	199	1.00	-	38.56	10.67	35.22

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

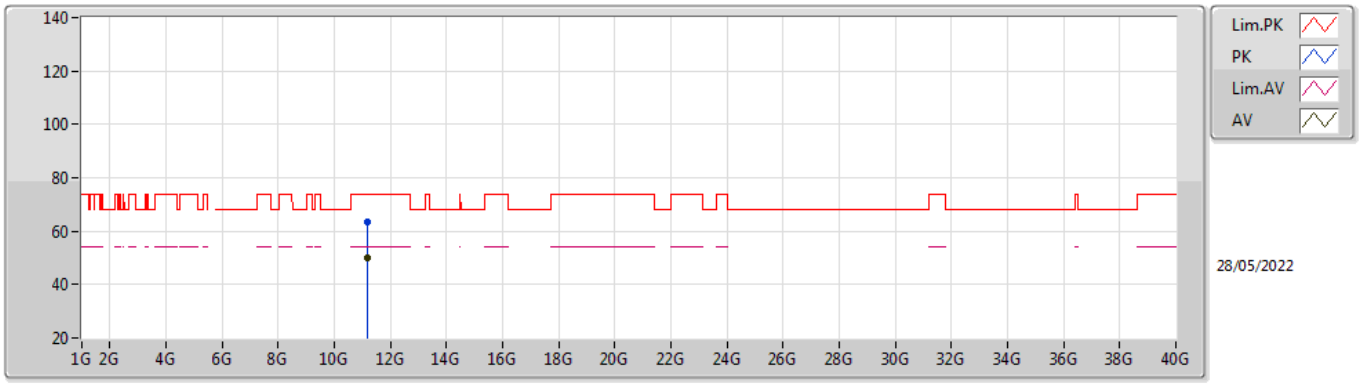


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1627G	63.46	74.00	-10.54	49.45	3	Horizontal	138	2.12	-	38.56	10.67	35.22
AV	11.15778G	49.89	54.00	-4.11	35.88	3	Horizontal	138	2.12	-	38.56	10.67	35.22

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

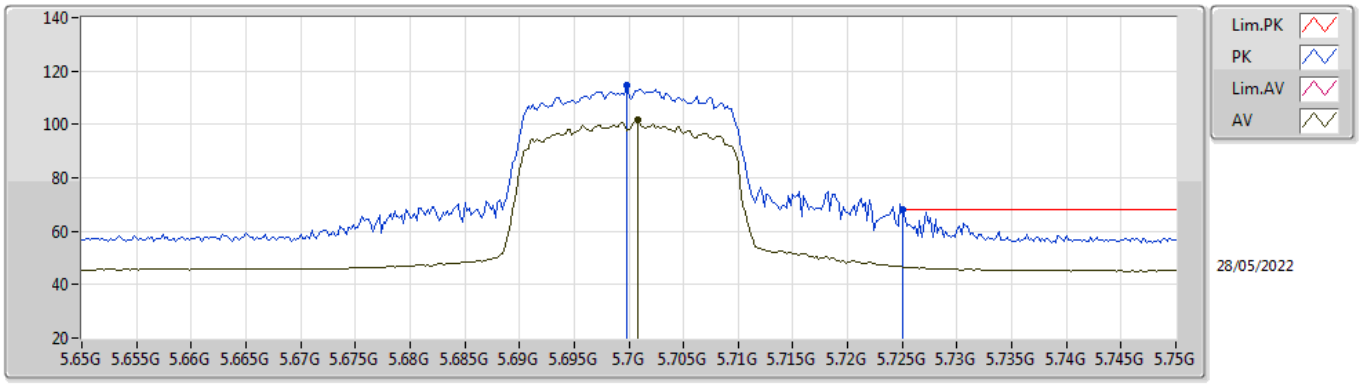


EUT X_2TX
Setting 14
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6998G	114.64	Inf	-Inf	108.39	3	Vertical	177	1.80	-	34.30	7.40	35.45
AV	5.7008G	101.61	Inf	-Inf	95.36	3	Vertical	177	1.80	-	34.30	7.40	35.45
PK	5.725G	68.05	68.20	-0.15	61.86	3	Vertical	177	1.80	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

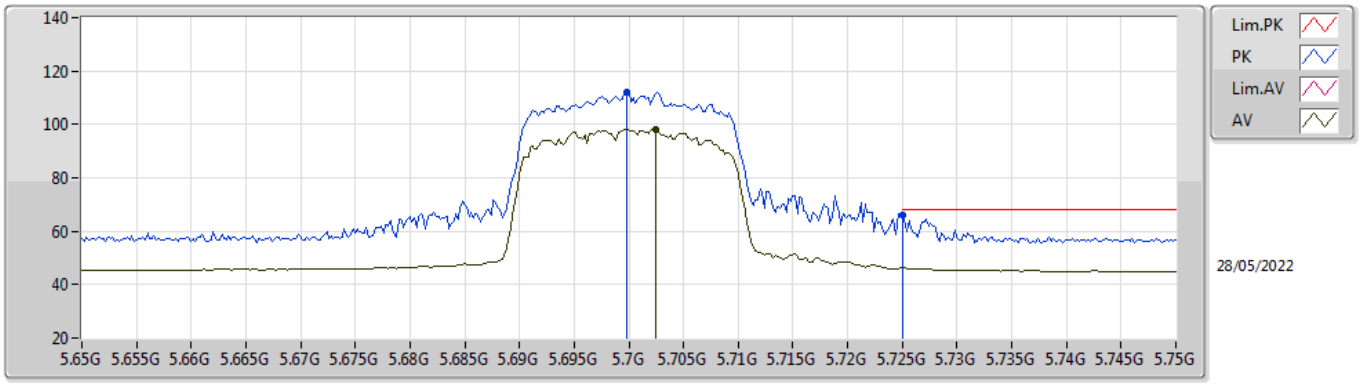


EUT X_2TX
Setting 14
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6998G	112.14	Inf	-Inf	105.89	3	Horizontal	190	3.00	-	34.30	7.40	35.45
AV	5.7024G	98.21	Inf	-Inf	91.96	3	Horizontal	190	3.00	-	34.30	7.40	35.45
PK	5.725G	65.93	68.20	-2.27	59.74	3	Horizontal	190	3.00	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

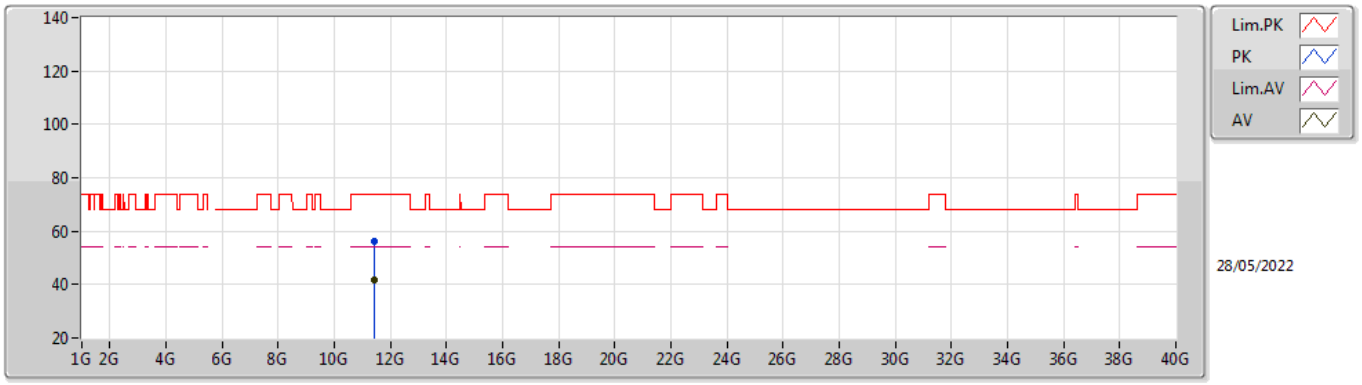


EUT X_2TX
Setting 14
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.40936G	56.38	74.00	-17.62	42.35	3	Vertical	144	2.97	-	38.82	10.71	35.50
AV	11.40234G	41.77	54.00	-12.23	27.75	3	Vertical	144	2.97	-	38.80	10.71	35.49

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

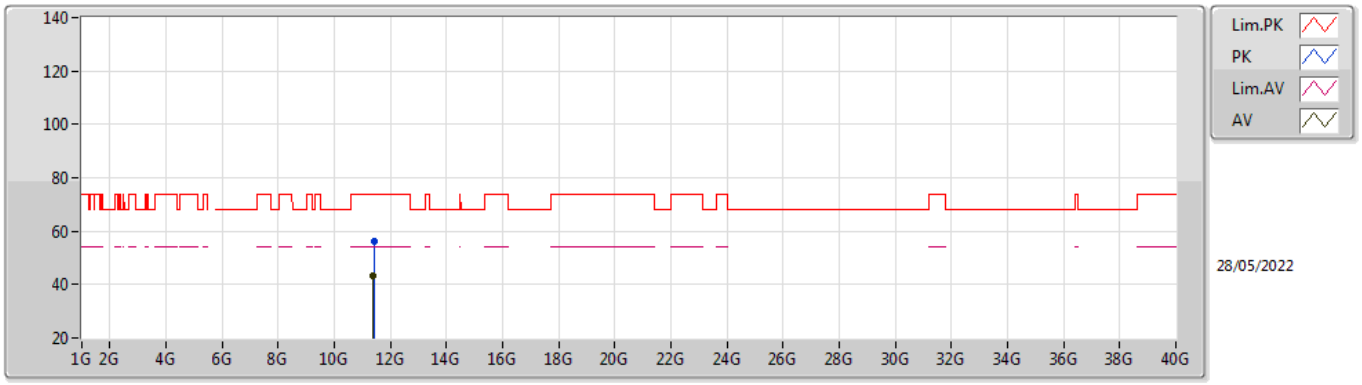


EUT X_2TX
Setting 14
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4057G	56.40	74.00	-17.60	42.37	3	Horizontal	169	1.27	-	38.81	10.71	35.49
AV	11.40042G	43.16	54.00	-10.84	29.14	3	Horizontal	169	1.27	-	38.80	10.71	35.49

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

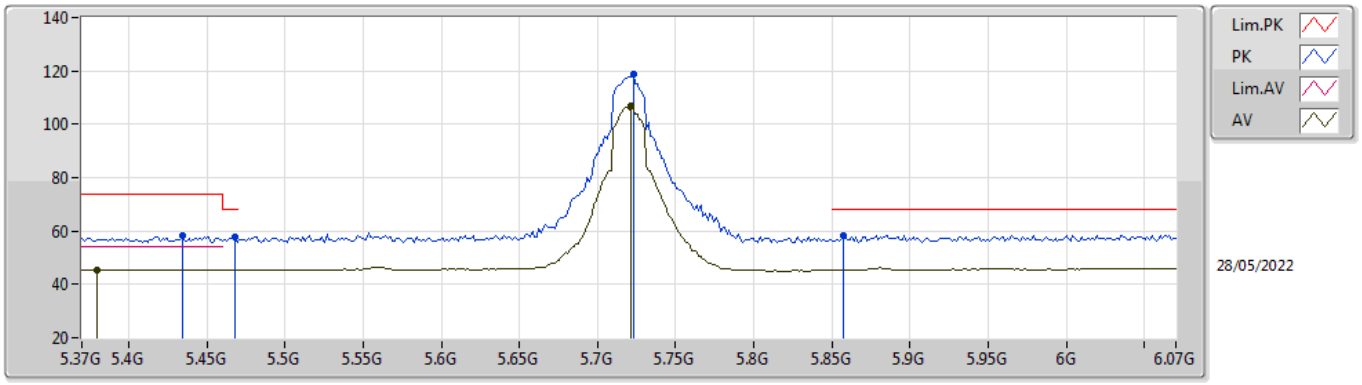


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4344G	58.25	74.00	-15.75	51.84	3	Vertical	177	1.73	-	34.53	7.23	35.35
AV	5.3798G	45.46	54.00	-8.54	39.05	3	Vertical	177	1.73	-	34.56	7.20	35.35
PK	5.468G	57.94	68.20	-10.26	51.48	3	Vertical	177	1.73	-	34.54	7.27	35.35
PK	5.7228G	118.55	Inf	-Inf	112.36	3	Vertical	177	1.73	-	34.25	7.40	35.46
AV	5.7214G	106.97	Inf	-Inf	100.77	3	Vertical	177	1.73	-	34.26	7.40	35.46
PK	5.8572G	58.35	68.20	-9.85	52.08	3	Vertical	177	1.73	-	34.34	7.46	35.53

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

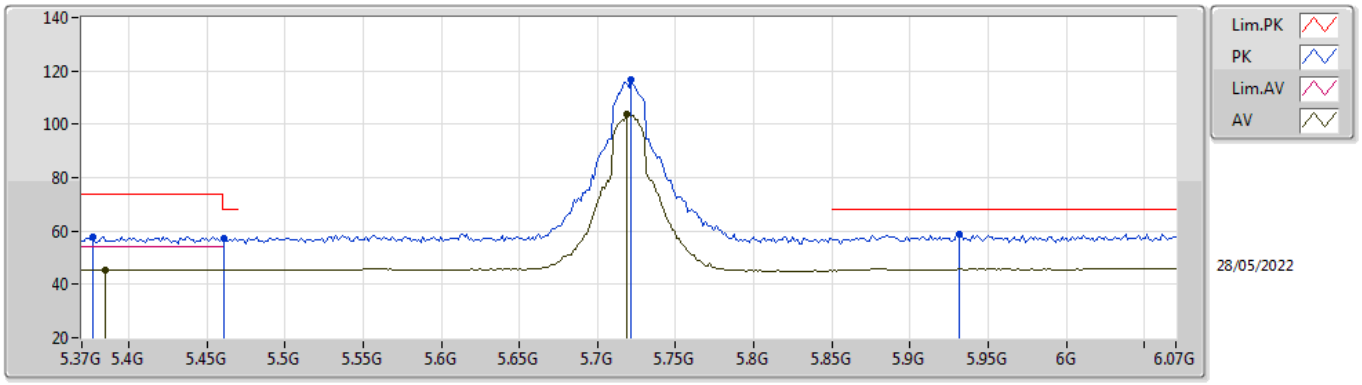


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.377G	57.97	74.00	-16.03	51.57	3	Horizontal	187	3.00	-	34.55	7.20	35.35
AV	5.3854G	45.38	54.00	-8.62	38.96	3	Horizontal	187	3.00	-	34.57	7.20	35.35
PK	5.461G	57.25	68.20	-10.95	50.82	3	Horizontal	187	3.00	-	34.52	7.26	35.35
PK	5.7214G	116.91	Inf	-Inf	110.71	3	Horizontal	187	3.00	-	34.26	7.40	35.46
AV	5.7186G	103.86	Inf	-Inf	97.66	3	Horizontal	187	3.00	-	34.26	7.40	35.46
PK	5.9314G	58.71	68.20	-9.49	52.02	3	Horizontal	187	3.00	-	34.73	7.53	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

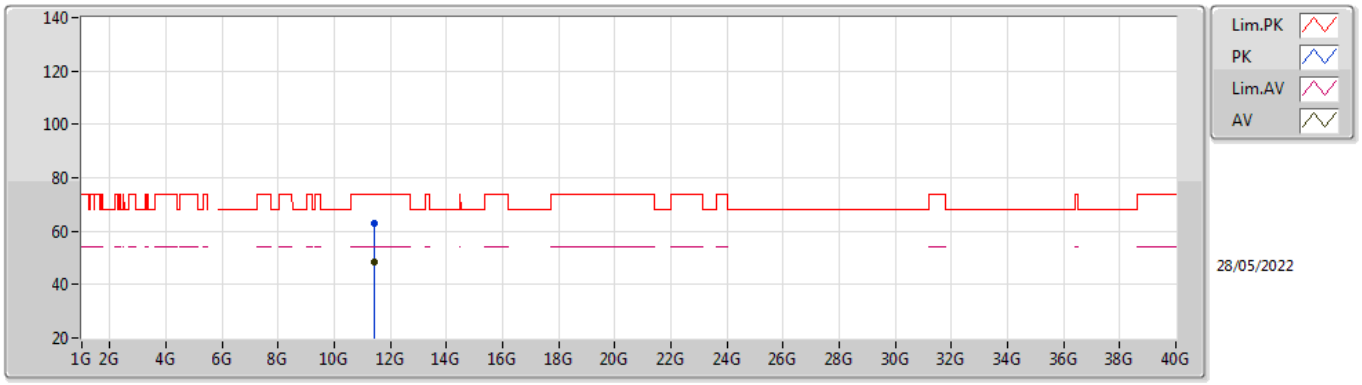


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.43982G	62.90	74.00	-11.10	48.83	3	Vertical	201	1.00	-	38.88	10.72	35.53
AV	11.4397G	48.64	54.00	-5.36	34.57	3	Vertical	201	1.00	-	38.88	10.72	35.53

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

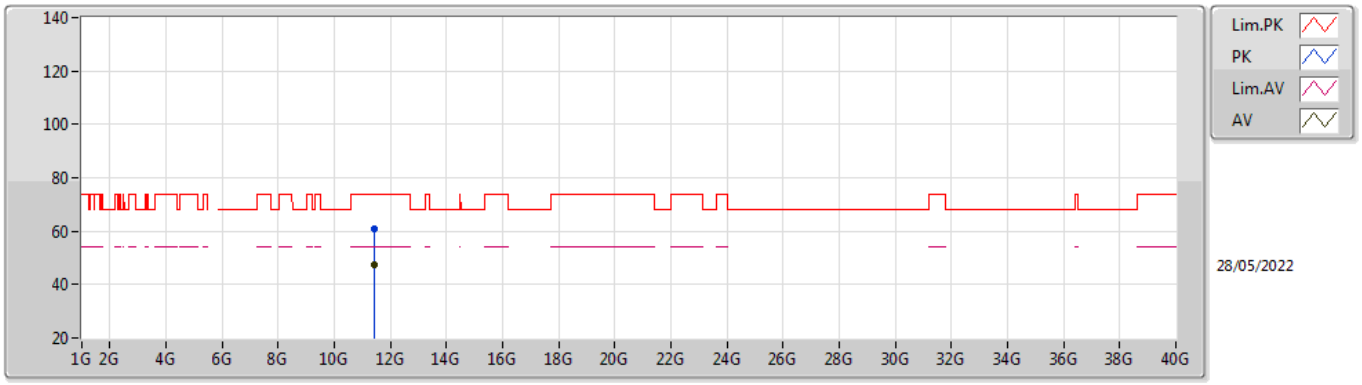


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.44144G	60.75	74.00	-13.25	46.68	3	Horizontal	140	2.07	-	38.88	10.72	35.53
AV	11.4379G	47.67	54.00	-6.33	33.60	3	Horizontal	140	2.07	-	38.88	10.72	35.53

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

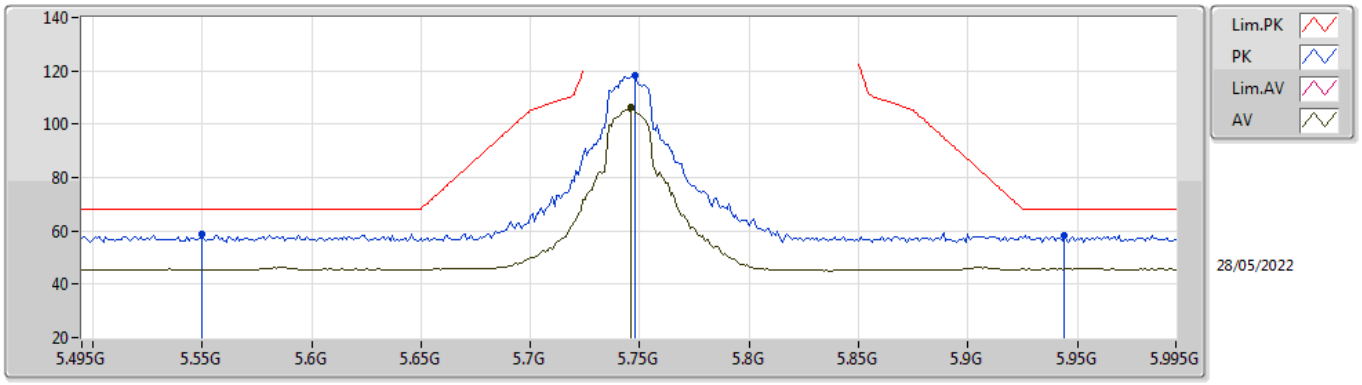


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.55G	58.86	68.20	-9.34	52.28	3	Vertical	176	1.73	-	34.60	7.35	35.37
PK	5.748G	118.41	Inf	-Inf	112.28	3	Vertical	176	1.73	-	34.20	7.40	35.47
AV	5.746G	106.21	Inf	-Inf	100.07	3	Vertical	176	1.73	-	34.21	7.40	35.47
PK	5.944G	58.26	68.20	-9.94	51.51	3	Vertical	176	1.73	-	34.78	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

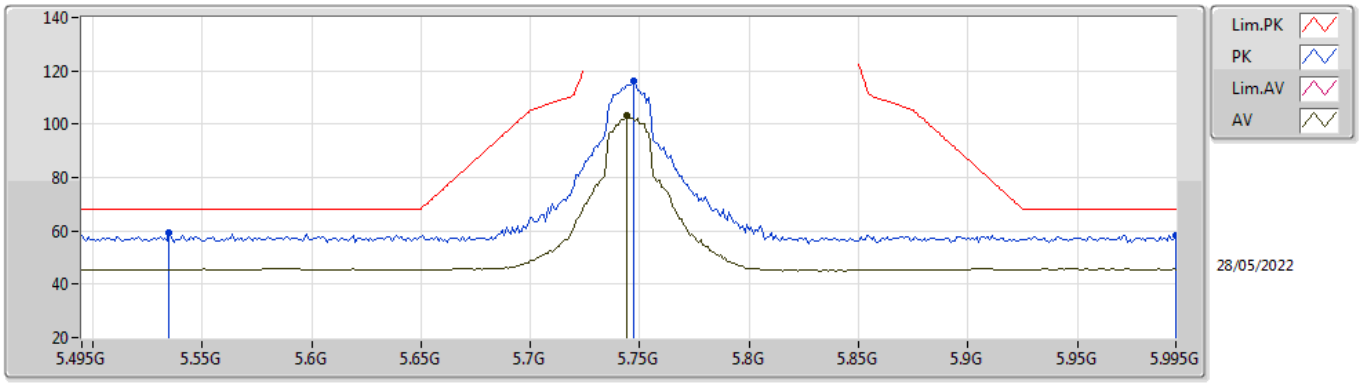


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.535G	59.53	68.20	-8.67	52.96	3	Horizontal	187	2.98	-	34.60	7.34	35.37
PK	5.747G	116.38	Inf	-Inf	110.24	3	Horizontal	187	2.98	-	34.21	7.40	35.47
AV	5.744G	103.19	Inf	-Inf	97.05	3	Horizontal	187	2.98	-	34.21	7.40	35.47
PK	5.995G	58.29	68.20	-9.91	51.50	3	Horizontal	187	2.98	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

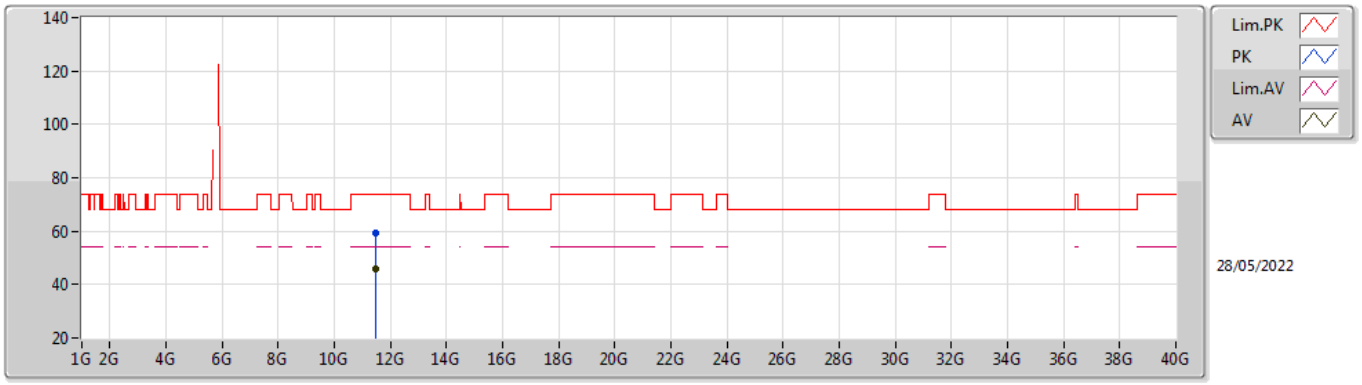


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.48478G	59.11	74.00	-14.89	45.00	3	Vertical	204	2.95	-	38.97	10.72	35.58
AV	11.48754G	45.98	54.00	-8.02	31.87	3	Vertical	204	2.95	-	38.98	10.72	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

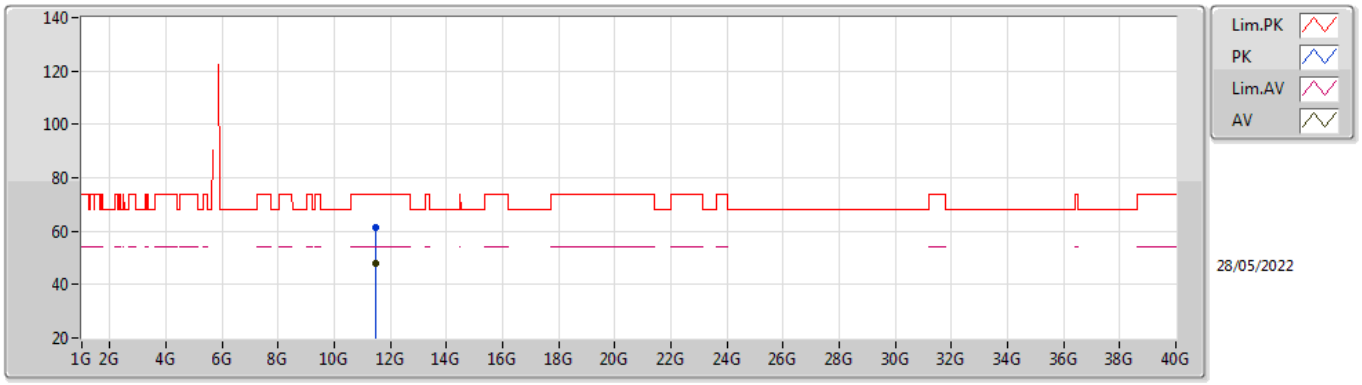


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.49012G	61.56	74.00	-12.44	47.45	3	Horizontal	137	2.05	-	38.98	10.72	35.59
AV	11.48772G	48.04	54.00	-5.96	33.93	3	Horizontal	137	2.05	-	38.98	10.72	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

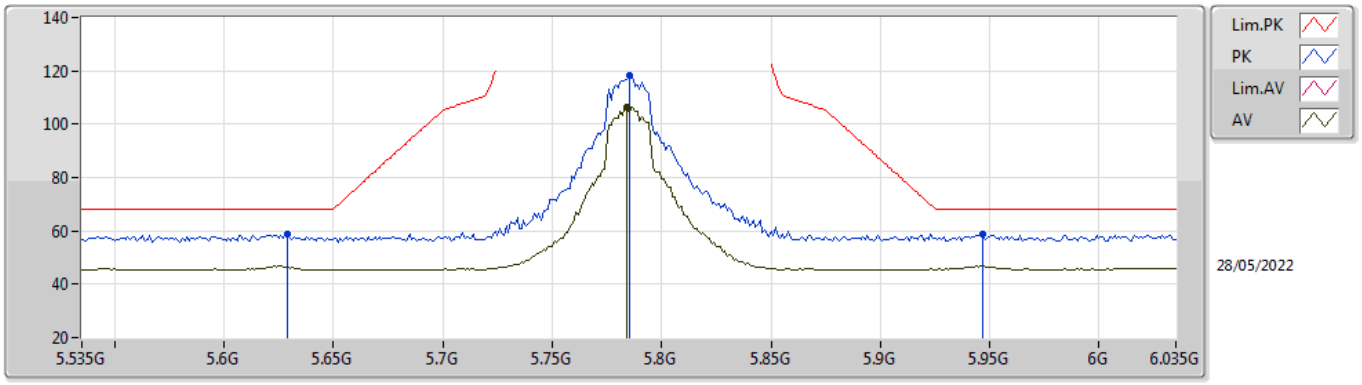


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.629G	58.79	68.20	-9.41	52.26	3	Vertical	177	1.80	-	34.54	7.40	35.41
PK	5.785G	118.32	Inf	-Inf	112.21	3	Vertical	177	1.80	-	34.20	7.40	35.49
AV	5.784G	106.41	Inf	-Inf	100.30	3	Vertical	177	1.80	-	34.20	7.40	35.49
PK	5.947G	58.71	68.20	-9.49	51.94	3	Vertical	177	1.80	-	34.79	7.55	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

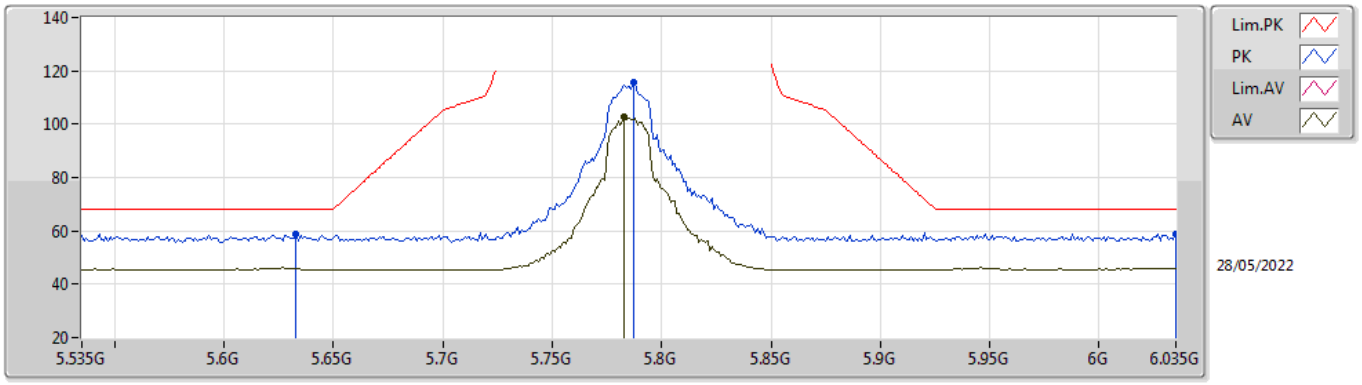


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.633G	58.83	68.20	-9.37	52.32	3	Horizontal	186	3.00	-	34.53	7.40	35.42
PK	5.787G	115.67	Inf	-Inf	109.56	3	Horizontal	186	3.00	-	34.20	7.40	35.49
AV	5.783G	102.53	Inf	-Inf	96.42	3	Horizontal	186	3.00	-	34.20	7.40	35.49
PK	6.035G	59.00	68.20	-9.20	52.10	3	Horizontal	186	3.00	-	34.87	7.62	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

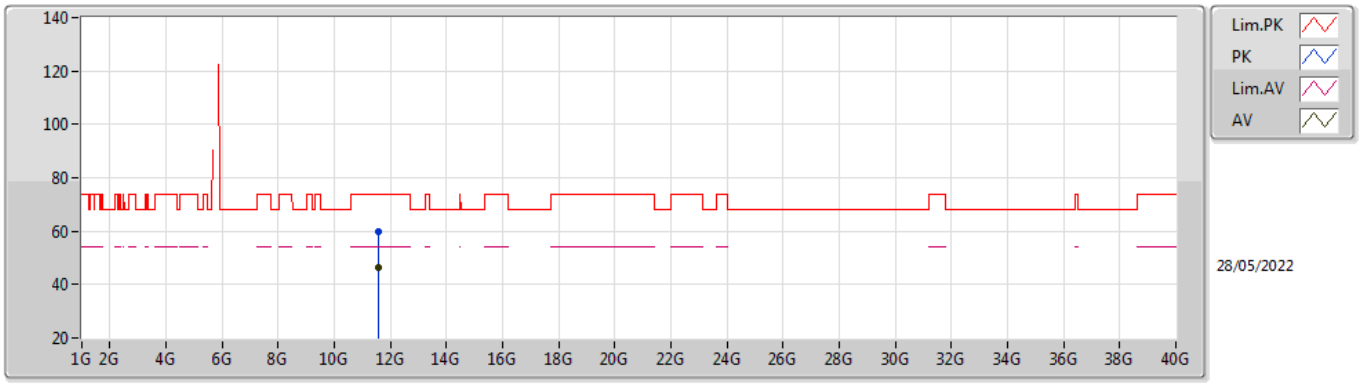


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.56766G	60.01	74.00	-13.99	45.59	3	Vertical	212	2.98	-	39.27	10.74	35.59
AV	11.5676G	46.35	54.00	-7.65	31.93	3	Vertical	212	2.98	-	39.27	10.74	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

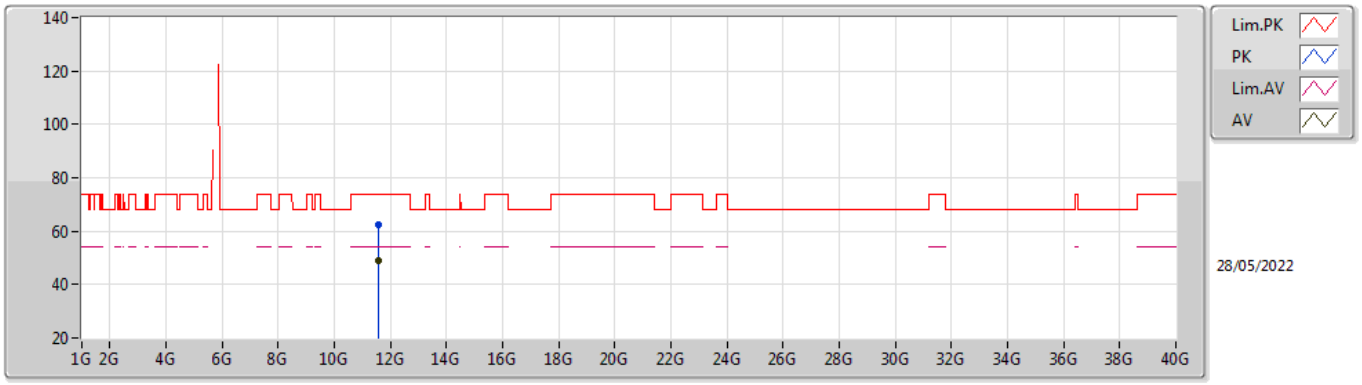


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5727G	62.43	74.00	-11.57	47.98	3	Horizontal	136	2.06	-	39.29	10.74	35.58
AV	11.56778G	49.18	54.00	-4.82	34.76	3	Horizontal	136	2.06	-	39.27	10.74	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

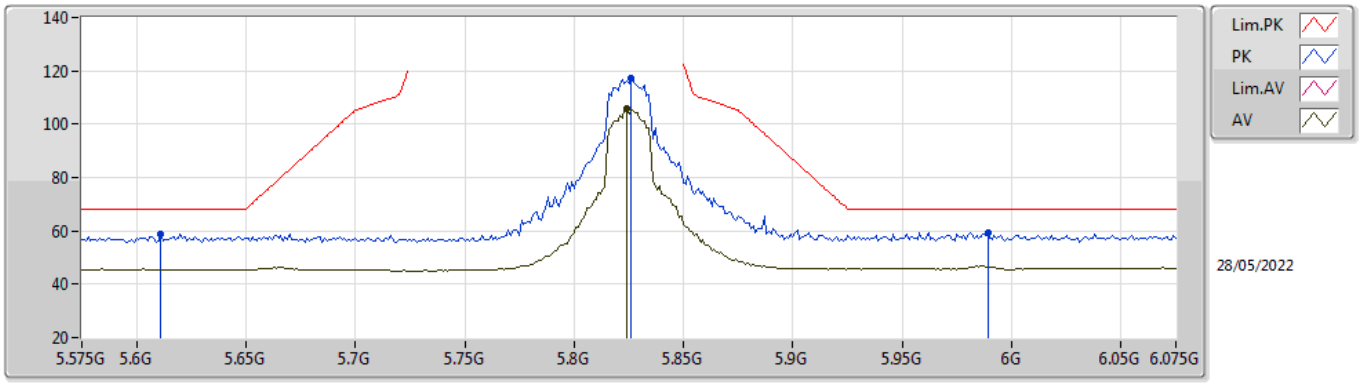


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.611G	58.95	68.20	-9.25	52.38	3	Vertical	177	1.87	-	34.58	7.40	35.41
PK	5.826G	117.27	Inf	-Inf	111.10	3	Vertical	177	1.87	-	34.25	7.43	35.51
AV	5.824G	105.65	Inf	-Inf	99.49	3	Vertical	177	1.87	-	34.25	7.42	35.51
PK	5.989G	59.41	68.20	-8.79	52.61	3	Vertical	177	1.87	-	34.80	7.59	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

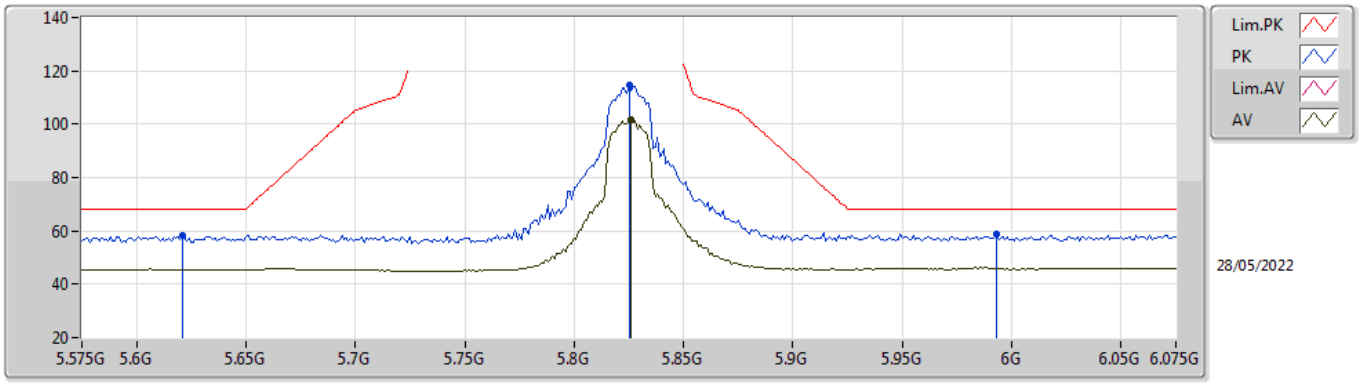


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.621G	58.32	68.20	-9.88	51.77	3	Horizontal	189	3.00	-	34.56	7.40	35.41
PK	5.825G	114.62	Inf	-Inf	108.45	3	Horizontal	189	3.00	-	34.25	7.43	35.51
AV	5.826G	101.82	Inf	-Inf	95.65	3	Horizontal	189	3.00	-	34.25	7.43	35.51
PK	5.993G	58.67	68.20	-9.53	51.88	3	Horizontal	189	3.00	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

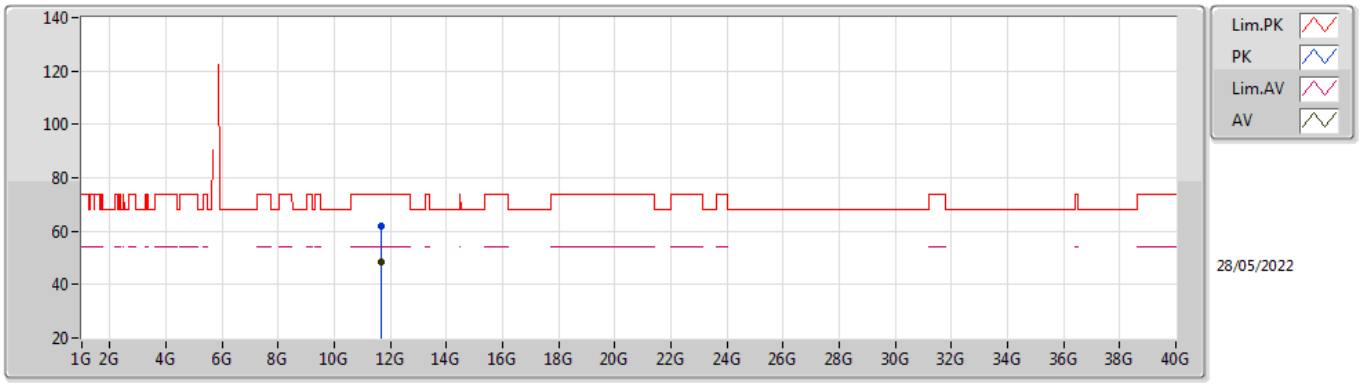


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65192G	62.14	74.00	-11.86	47.56	3	Vertical	178	2.74	-	39.40	10.75	35.57
AV	11.65228G	48.27	54.00	-5.73	33.69	3	Vertical	178	2.74	-	39.40	10.75	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

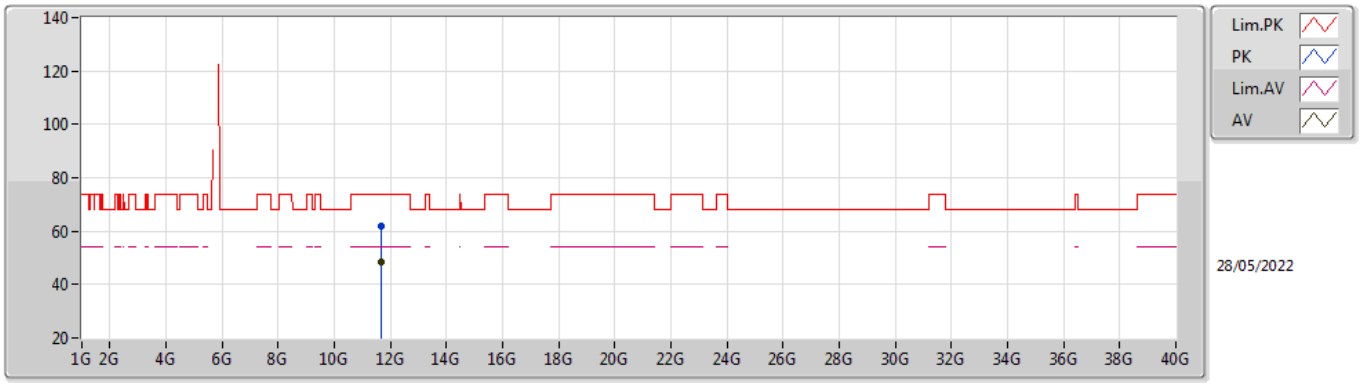


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6521G	61.78	74.00	-12.22	47.20	3	Horizontal	199	2.09	-	39.40	10.75	35.57
AV	11.65024G	48.43	54.00	-5.57	33.85	3	Horizontal	199	2.09	-	39.40	10.75	35.57

802.11ax HEW40_Nss1,(MCS0)_2TX

5190MHz_TnomVnom

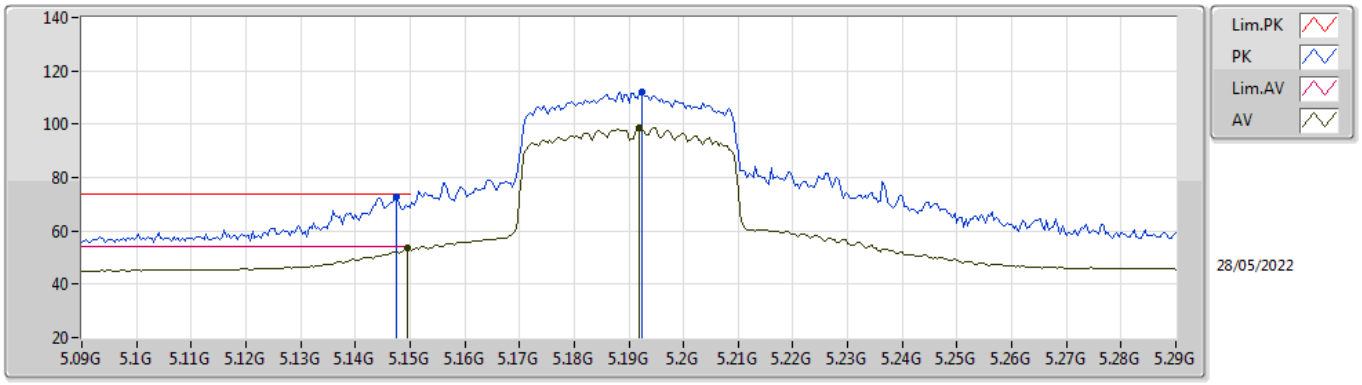


EUT X_2TX
Setting 16.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1476G	72.73	74.00	-1.27	66.90	3	Vertical	176	2.16	-	34.00	7.17	35.34
AV	5.1496G	53.42	54.00	-0.58	47.59	3	Vertical	176	2.16	-	34.00	7.17	35.34
PK	5.1924G	112.06	Inf	-Inf	106.03	3	Vertical	176	2.16	-	34.17	7.20	35.34
AV	5.192G	98.87	Inf	-Inf	92.84	3	Vertical	176	2.16	-	34.17	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5190MHz_TnomVnom

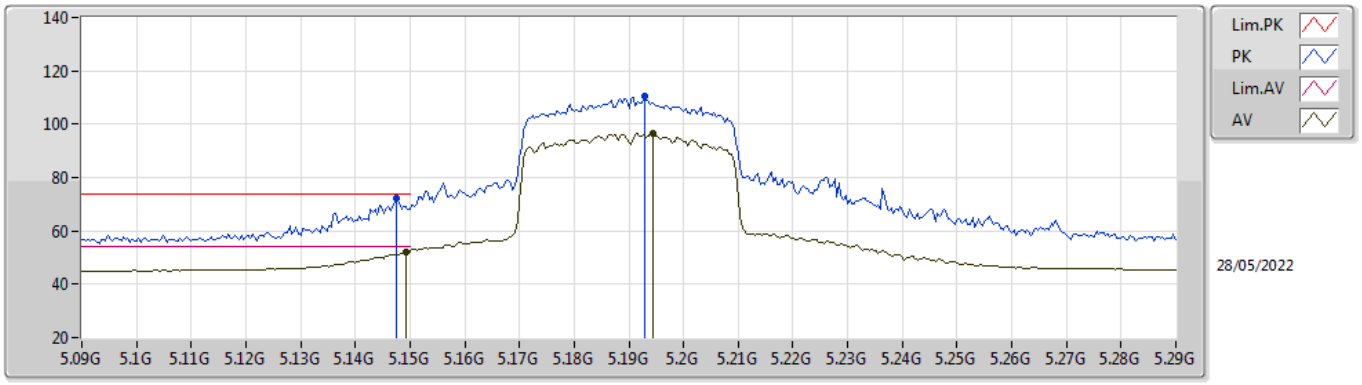


EUT X_2TX
Setting 16.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1476G	72.09	74.00	-1.91	66.26	3	Horizontal	186	2.14	-	34.00	7.17	35.34
AV	5.1492G	52.32	54.00	-1.68	46.49	3	Horizontal	186	2.14	-	34.00	7.17	35.34
PK	5.1928G	110.46	Inf	-Inf	104.43	3	Horizontal	186	2.14	-	34.17	7.20	35.34
AV	5.1944G	96.61	Inf	-Inf	90.57	3	Horizontal	186	2.14	-	34.18	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5190MHz_TnomVnom

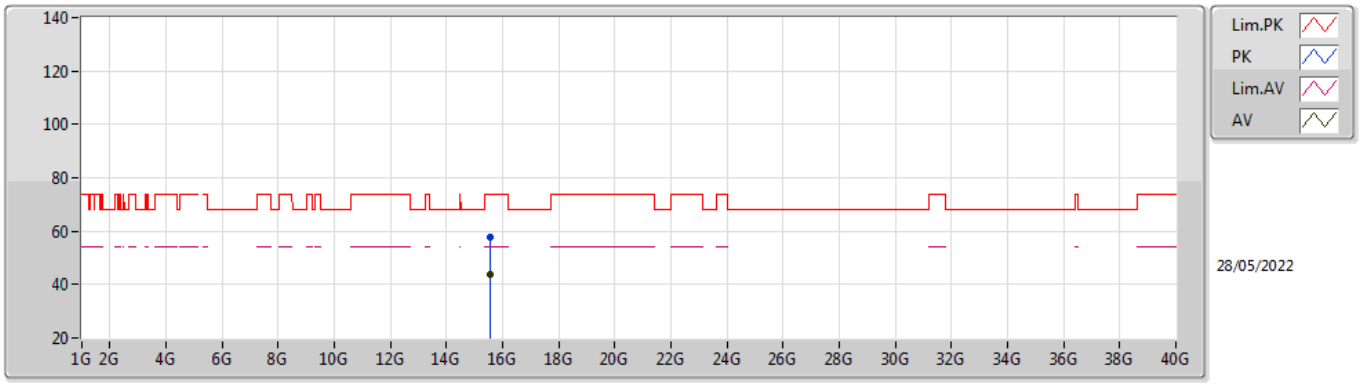


EUT X_2TX
Setting 16.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.57168G	57.74	74.00	-16.26	41.78	3	Vertical	319	2.86	-	38.20	13.19	35.43
AV	15.58014G	44.05	54.00	-9.95	28.16	3	Vertical	319	2.86	-	38.14	13.19	35.44

802.11ax HEW40_Nss1,(MCS0)_2TX

5190MHz_TnomVnom

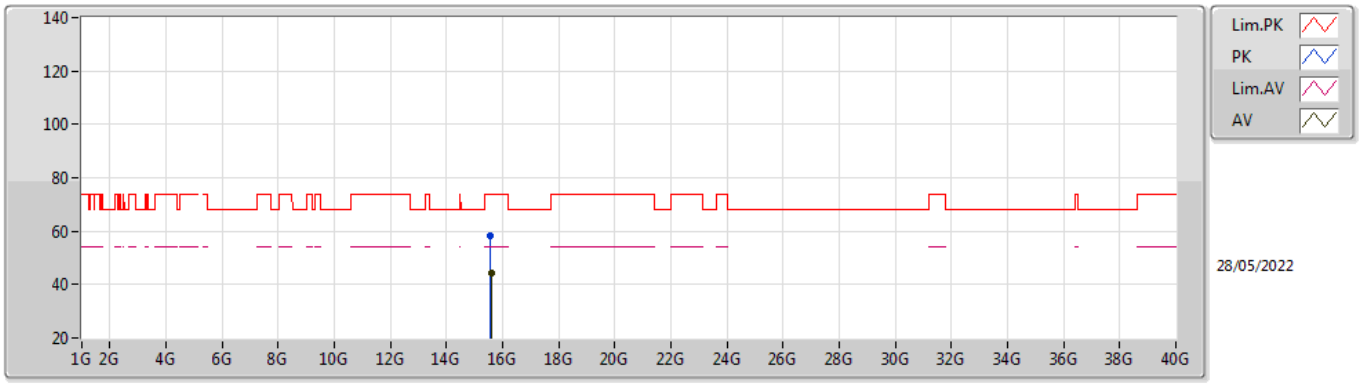


EUT X_2TX
Setting 16.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.55686G	58.31	74.00	-15.69	42.25	3	Horizontal	72	1.69	-	38.30	13.18	35.42
AV	15.5838G	44.10	54.00	-9.90	28.24	3	Horizontal	72	1.69	-	38.11	13.19	35.44

802.11ax HEW40_Nss1,(MCS0)_2TX

5230MHz_TnomVnom

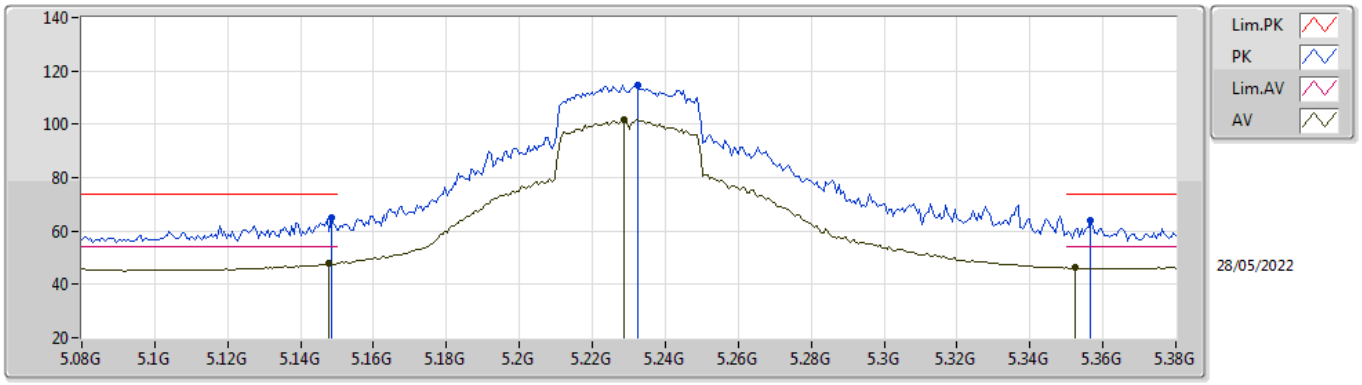


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1484G	65.10	74.00	-8.90	59.27	3	Vertical	173	2.04	-	34.00	7.17	35.34
AV	5.1478G	48.03	54.00	-5.97	42.20	3	Vertical	173	2.04	-	34.00	7.17	35.34
PK	5.2324G	114.80	Inf	-Inf	108.61	3	Vertical	173	2.04	-	34.33	7.20	35.34
AV	5.2288G	101.72	Inf	-Inf	95.54	3	Vertical	173	2.04	-	34.32	7.20	35.34
PK	5.3566G	64.05	74.00	-9.95	57.68	3	Vertical	173	2.04	-	34.51	7.20	35.34
AV	5.3524G	46.22	54.00	-7.78	39.86	3	Vertical	173	2.04	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5230MHz_TnomVnom

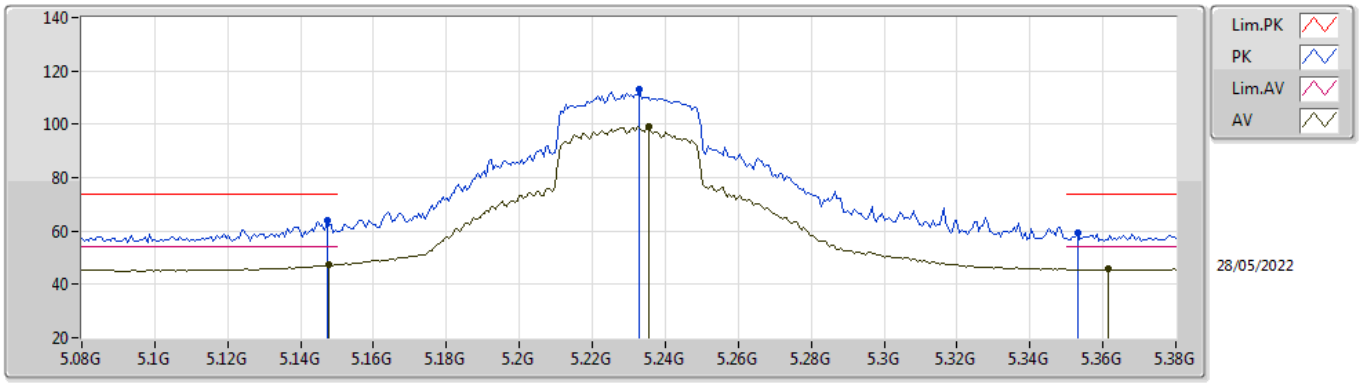


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1472G	64.06	74.00	-9.94	58.24	3	Horizontal	186	1.96	-	33.99	7.17	35.34
AV	5.1478G	47.33	54.00	-6.67	41.50	3	Horizontal	186	1.96	-	34.00	7.17	35.34
PK	5.233G	112.97	Inf	-Inf	106.78	3	Horizontal	186	1.96	-	34.33	7.20	35.34
AV	5.2354G	99.11	Inf	-Inf	92.91	3	Horizontal	186	1.96	-	34.34	7.20	35.34
PK	5.353G	59.37	74.00	-14.63	53.00	3	Horizontal	186	1.96	-	34.51	7.20	35.34
AV	5.3614G	45.62	54.00	-8.38	39.24	3	Horizontal	186	1.96	-	34.52	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5230MHz_TnomVnom

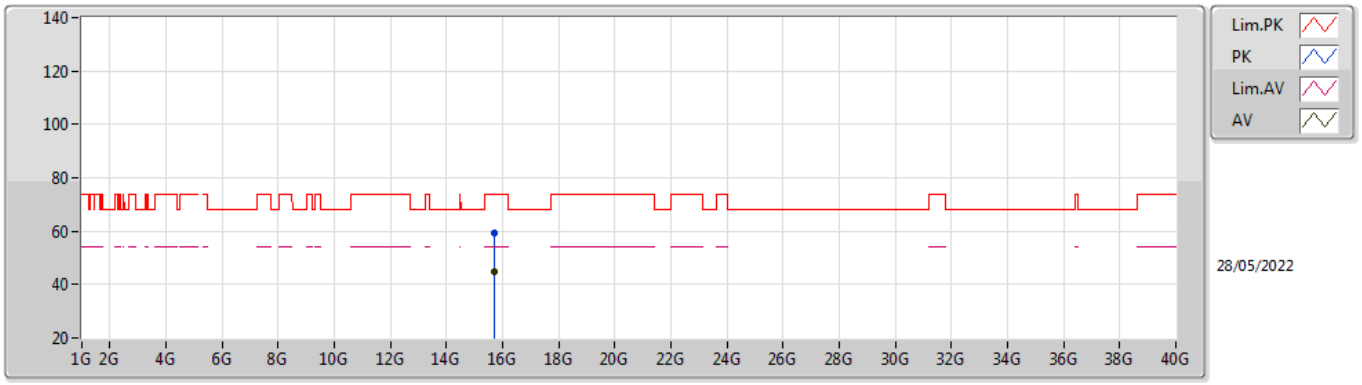


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.68376G	59.55	74.00	-14.45	44.25	3	Vertical	195	3.00	-	37.58	13.24	35.52
AV	15.68382G	44.97	54.00	-9.03	29.67	3	Vertical	195	3.00	-	37.58	13.24	35.52

802.11ax HEW40_Nss1,(MCS0)_2TX

5230MHz_TnomVnom

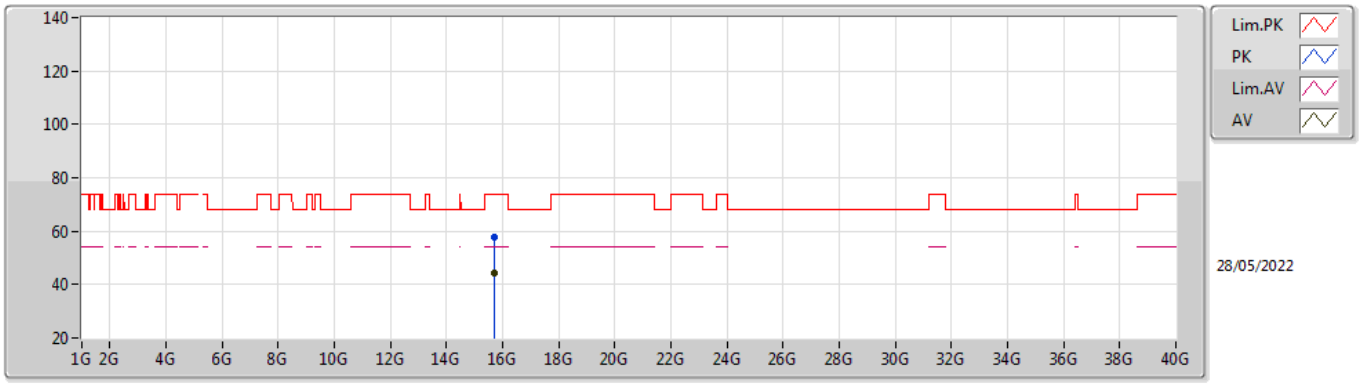


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.69066G	57.74	74.00	-16.26	42.47	3	Horizontal	201	1.41	-	37.55	13.25	35.53
AV	15.6876G	44.30	54.00	-9.70	29.03	3	Horizontal	201	1.41	-	37.56	13.24	35.53

802.11ax HEW40_Nss1,(MCS0)_2TX

5270MHz_TnomVnom

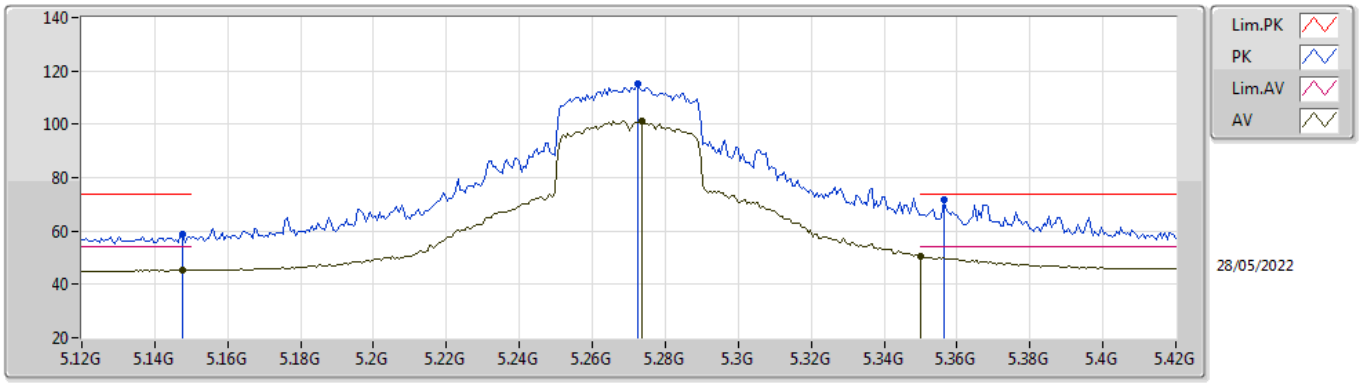


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1476G	58.68	74.00	-15.32	52.85	3	Vertical	174	2.01	-	34.00	7.17	35.34
AV	5.1476G	45.29	54.00	-8.71	39.46	3	Vertical	174	2.01	-	34.00	7.17	35.34
PK	5.2724G	115.31	Inf	-Inf	109.01	3	Vertical	174	2.01	-	34.44	7.20	35.34
AV	5.2736G	101.39	Inf	-Inf	95.08	3	Vertical	174	2.01	-	34.45	7.20	35.34
PK	5.3564G	71.93	74.00	-2.07	65.56	3	Vertical	174	2.01	-	34.51	7.20	35.34
AV	5.35G	50.31	54.00	-3.69	43.95	3	Vertical	174	2.01	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5270MHz_TnomVnom

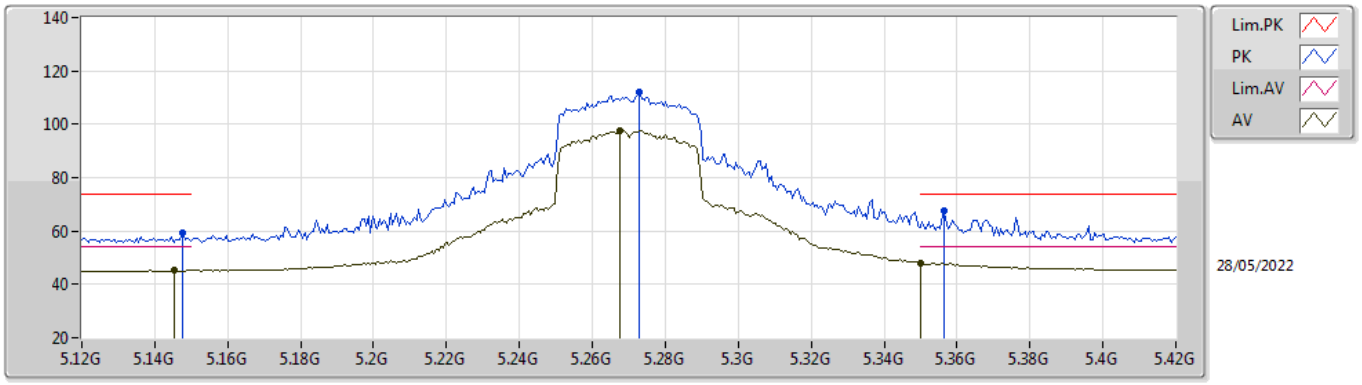


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1476G	59.08	74.00	-14.92	53.25	3	Horizontal	189	2.03	-	34.00	7.17	35.34
AV	5.1452G	45.19	54.00	-8.81	39.37	3	Horizontal	189	2.03	-	33.99	7.17	35.34
PK	5.273G	112.03	Inf	-Inf	105.72	3	Horizontal	189	2.03	-	34.45	7.20	35.34
AV	5.2676G	97.84	Inf	-Inf	91.54	3	Horizontal	189	2.03	-	34.44	7.20	35.34
PK	5.3564G	67.69	74.00	-6.31	61.32	3	Horizontal	189	2.03	-	34.51	7.20	35.34
AV	5.35G	47.87	54.00	-6.13	41.51	3	Horizontal	189	2.03	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5270MHz_TnomVnom

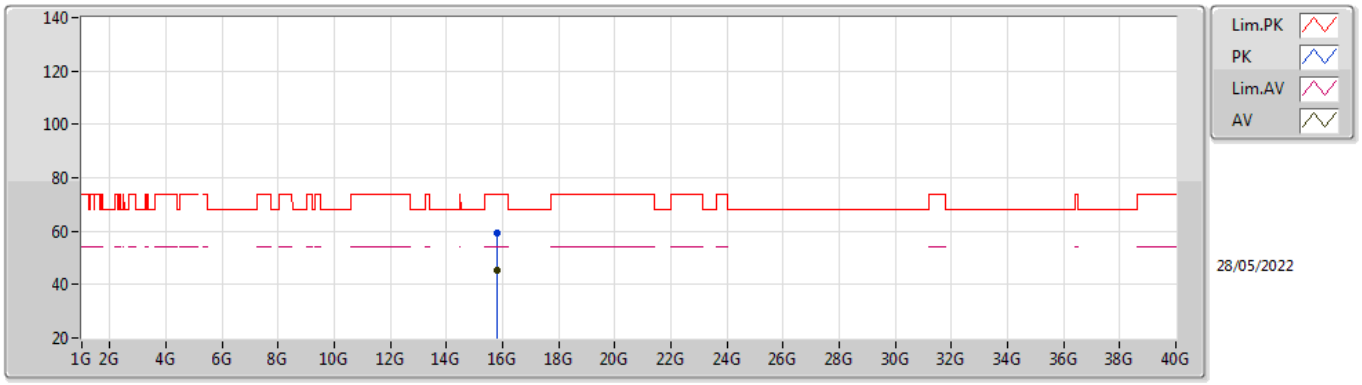


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.81168G	59.18	74.00	-14.82	43.64	3	Vertical	224	2.50	-	37.86	13.31	35.63
AV	15.80706G	45.55	54.00	-8.45	30.00	3	Vertical	224	2.50	-	37.88	13.30	35.63

802.11ax HEW40_Nss1,(MCS0)_2TX

5270MHz_TnomVnom

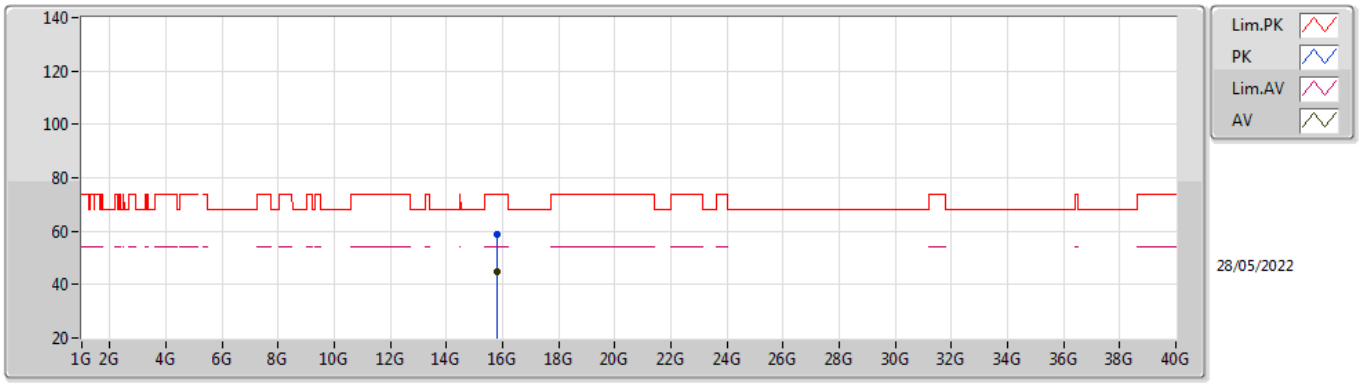


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7992G	58.87	74.00	-15.13	43.29	3	Horizontal	280	1.87	-	37.90	13.30	35.62
AV	15.80802G	44.72	54.00	-9.28	29.17	3	Horizontal	280	1.87	-	37.88	13.30	35.63

802.11ax HEW40_Nss1,(MCS0)_2TX

5310MHz_TnomVnom

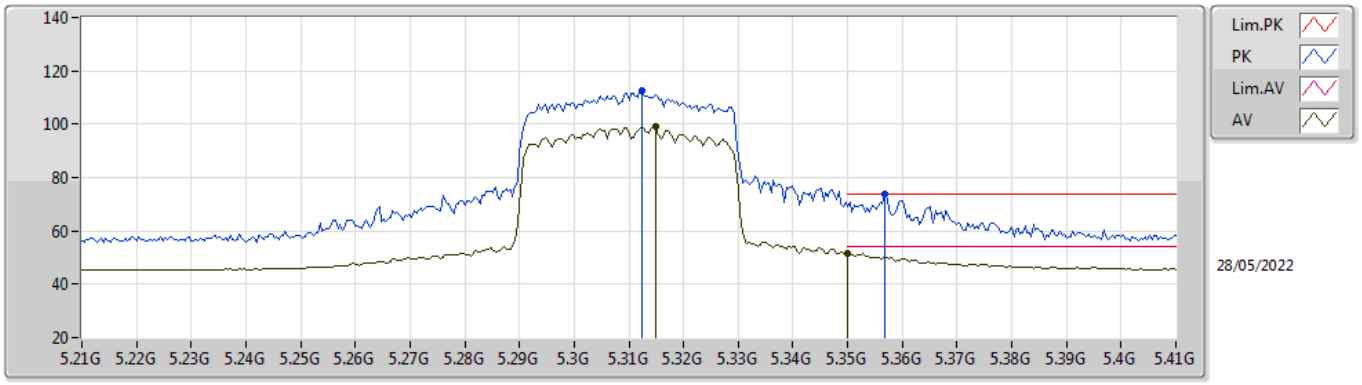


EUT X_2TX
Setting 14.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3124G	112.47	Inf	-Inf	106.11	3	Vertical	175	1.96	-	34.50	7.20	35.34
AV	5.3148G	99.16	Inf	-Inf	92.80	3	Vertical	175	1.96	-	34.50	7.20	35.34
PK	5.3568G	73.85	74.00	-0.15	67.48	3	Vertical	175	1.96	-	34.51	7.20	35.34
AV	5.35G	51.53	54.00	-2.47	45.17	3	Vertical	175	1.96	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5310MHz_TnomVnom

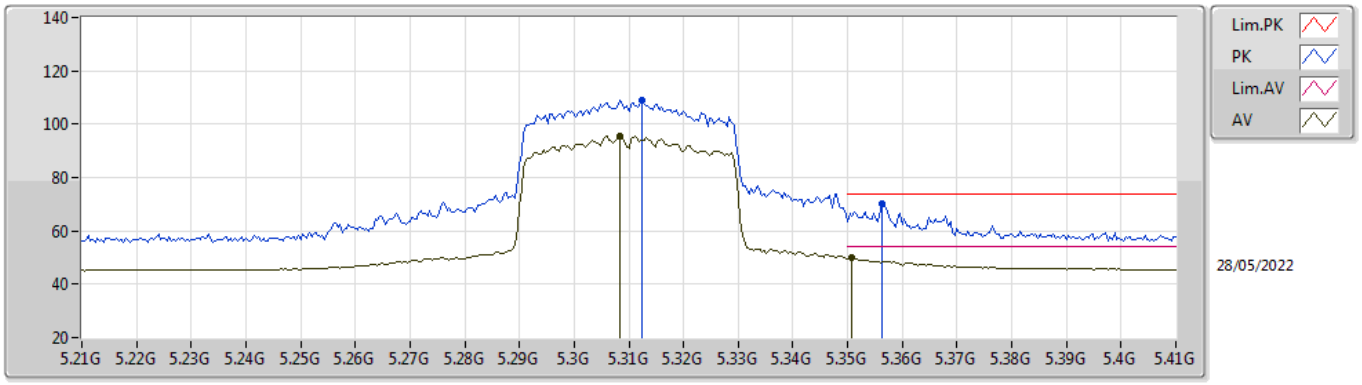


EUT X_2TX
Setting 14.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3124G	109.13	Inf	-Inf	102.77	3	Horizontal	189	2.96	-	34.50	7.20	35.34
AV	5.3084G	95.73	Inf	-Inf	89.37	3	Horizontal	189	2.96	-	34.50	7.20	35.34
PK	5.3564G	70.36	74.00	-3.64	63.99	3	Horizontal	189	2.96	-	34.51	7.20	35.34
AV	5.3508G	49.78	54.00	-4.22	43.42	3	Horizontal	189	2.96	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5310MHz_TnomVnom

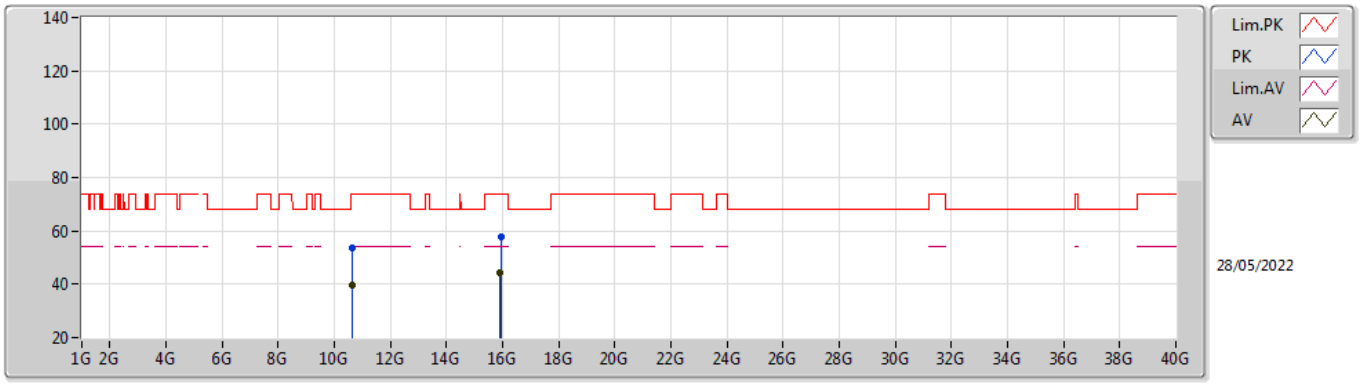


EUT X_2TX
Setting 14.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.62252G	53.47	74.00	-20.53	39.99	3	Vertical	304	2.17	-	38.25	10.59	35.36
AV	10.63482G	39.61	54.00	-14.39	26.09	3	Vertical	304	2.17	-	38.27	10.60	35.35
PK	15.93318G	57.74	74.00	-16.26	42.57	3	Vertical	169	2.31	-	37.53	13.37	35.73
AV	15.915G	44.32	54.00	-9.68	29.11	3	Vertical	169	2.31	-	37.57	13.36	35.72

802.11ax HEW40_Nss1,(MCS0)_2TX

5310MHz_TnomVnom

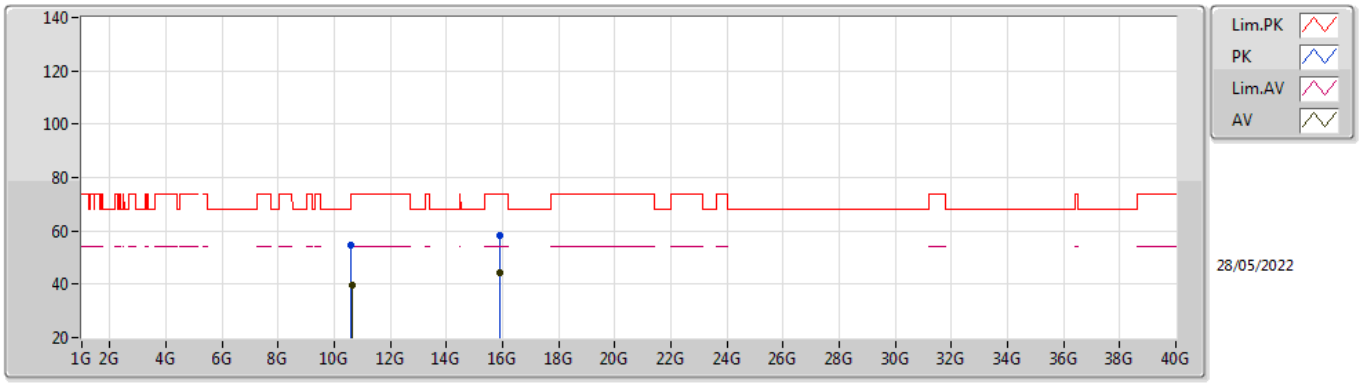


EUT X_2TX
Setting 14.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.61172G	54.46	74.00	-19.54	41.02	3	Horizontal	242	1.18	-	38.22	10.59	35.37
AV	10.62654G	39.57	54.00	-14.43	26.09	3	Horizontal	242	1.18	-	38.25	10.59	35.36
PK	15.91668G	58.50	74.00	-15.50	43.29	3	Horizontal	241	2.17	-	37.57	13.36	35.72
AV	15.91506G	44.39	54.00	-9.61	29.18	3	Horizontal	241	2.17	-	37.57	13.36	35.72

802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TnomVnom

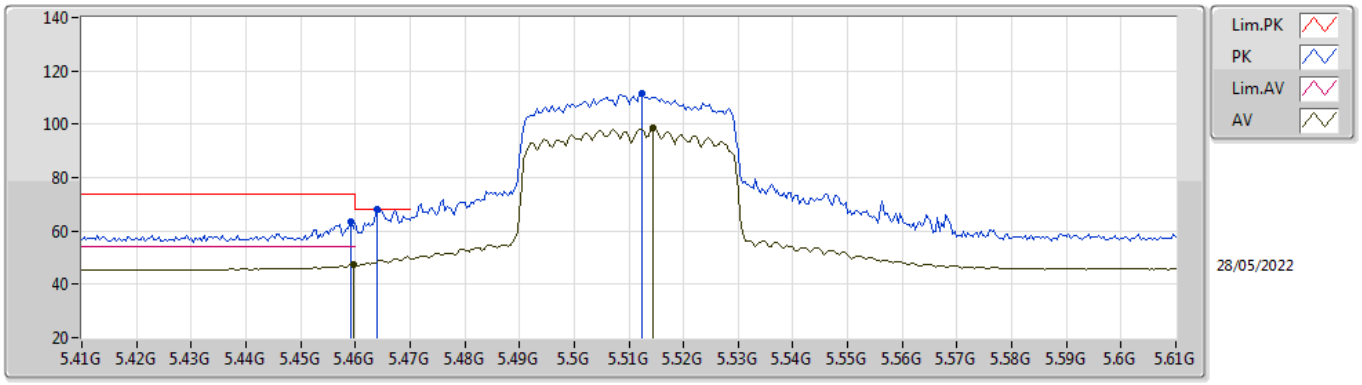


EUT X_2TX
Setting 15.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4592G	63.32	74.00	-10.68	56.89	3	Vertical	177	1.77	-	34.52	7.26	35.35
AV	5.4596G	47.39	54.00	-6.61	40.96	3	Vertical	177	1.77	-	34.52	7.26	35.35
PK	5.464G	68.18	68.20	-0.02	61.74	3	Vertical	177	1.77	-	34.53	7.26	35.35
PK	5.5124G	111.47	Inf	-Inf	104.92	3	Vertical	177	1.77	-	34.60	7.31	35.36
AV	5.5144G	98.49	Inf	-Inf	91.94	3	Vertical	177	1.77	-	34.60	7.31	35.36

802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TnomVnom

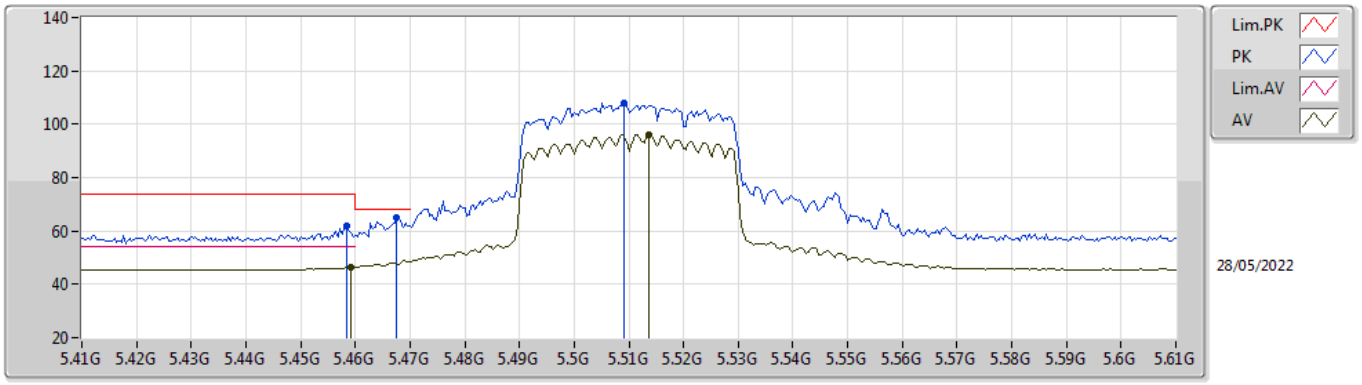


EUT X_2TX
Setting 15.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4584G	62.03	74.00	-11.97	55.60	3	Horizontal	185	3.00	-	34.52	7.26	35.35
AV	5.4592G	46.48	54.00	-7.52	40.05	3	Horizontal	185	3.00	-	34.52	7.26	35.35
PK	5.4676G	64.92	68.20	-3.28	58.46	3	Horizontal	185	3.00	-	34.54	7.27	35.35
PK	5.5092G	107.88	Inf	-Inf	101.32	3	Horizontal	185	3.00	-	34.60	7.31	35.35
AV	5.5136G	96.07	Inf	-Inf	89.52	3	Horizontal	185	3.00	-	34.60	7.31	35.36

802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TnomVnom

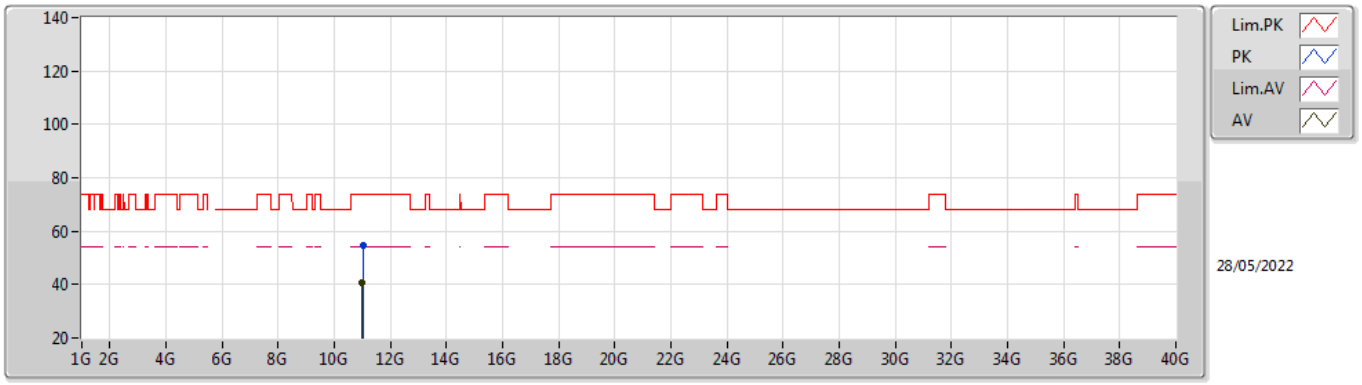


EUT X_2TX
Setting 15.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.03062G	54.53	74.00	-19.47	40.52	3	Vertical	342	2.12	-	38.43	10.65	35.07
AV	11.00758G	40.84	54.00	-13.16	26.83	3	Vertical	342	2.12	-	38.41	10.65	35.05

802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TnomVnom

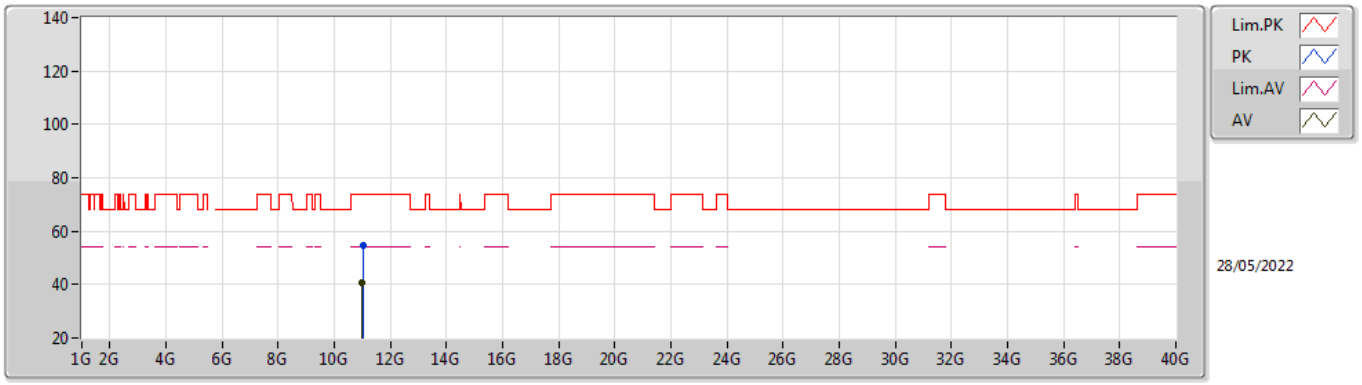


EUT X_2TX
Setting 15.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.01586G	54.74	74.00	-19.26	40.73	3	Horizontal	260	1.77	-	38.42	10.65	35.06
AV	11.0056G	40.85	54.00	-13.15	26.84	3	Horizontal	260	1.77	-	38.41	10.65	35.05

802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TnomVnom

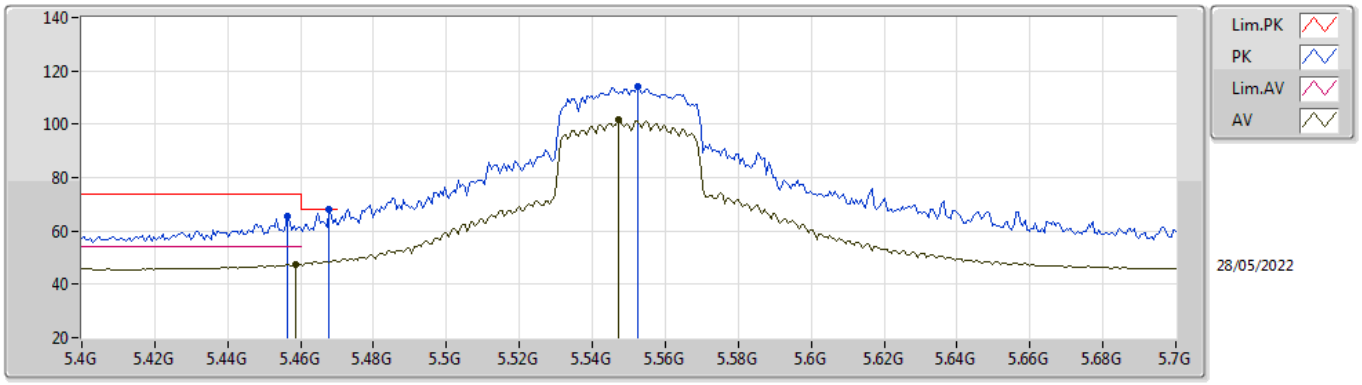


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4564G	65.46	74.00	-8.54	59.04	3	Vertical	174	1.80	-	34.51	7.26	35.35
AV	5.4588G	47.41	54.00	-6.59	40.98	3	Vertical	174	1.80	-	34.52	7.26	35.35
PK	5.4678G	67.86	68.20	-0.34	61.40	3	Vertical	174	1.80	-	34.54	7.27	35.35
PK	5.5524G	114.11	Inf	-Inf	107.54	3	Vertical	174	1.80	-	34.60	7.35	35.38
AV	5.547G	101.68	Inf	-Inf	95.10	3	Vertical	174	1.80	-	34.60	7.35	35.37

802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TnomVnom

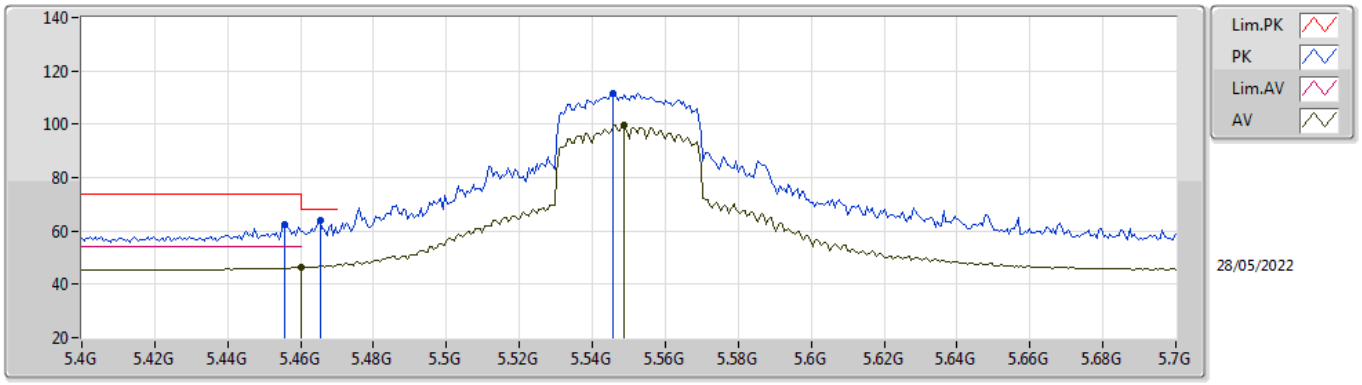


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4558G	62.56	74.00	-11.44	56.14	3	Horizontal	191	3.00	-	34.51	7.26	35.35
AV	5.46G	46.48	54.00	-7.52	40.05	3	Horizontal	191	3.00	-	34.52	7.26	35.35
PK	5.4654G	63.94	68.20	-4.26	57.49	3	Horizontal	191	3.00	-	34.53	7.27	35.35
PK	5.5458G	111.80	Inf	-Inf	105.22	3	Horizontal	191	3.00	-	34.60	7.35	35.37
AV	5.5488G	99.69	Inf	-Inf	93.11	3	Horizontal	191	3.00	-	34.60	7.35	35.37

802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TnomVnom

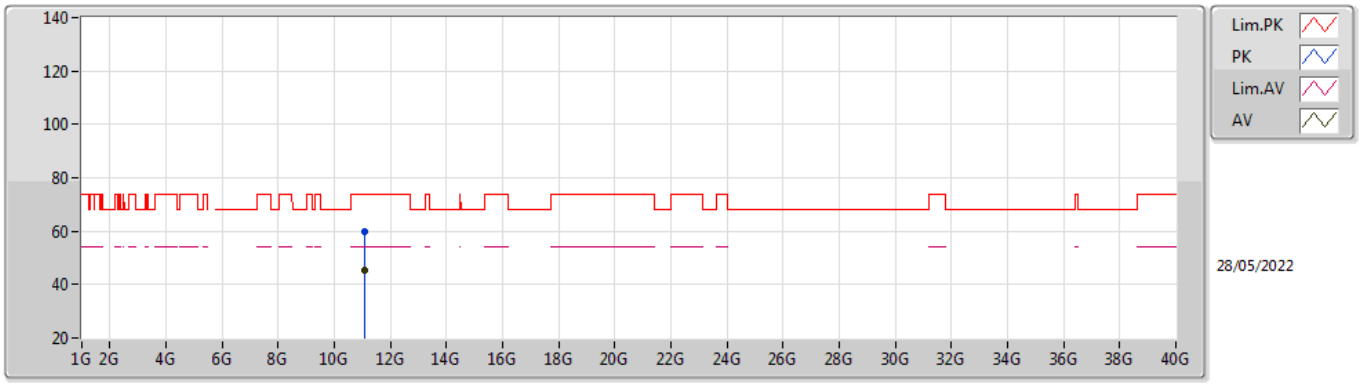


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.09874G	59.80	74.00	-14.20	45.79	3	Vertical	198	1.03	-	38.50	10.66	35.15
AV	11.0994G	45.18	54.00	-8.82	31.17	3	Vertical	198	1.03	-	38.50	10.66	35.15

802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TnomVnom

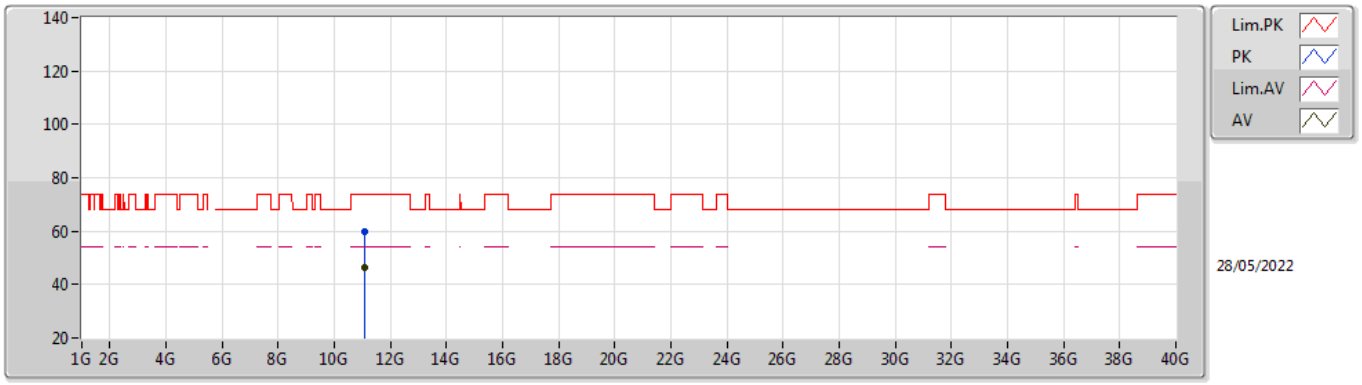


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.10516G	59.58	74.00	-14.42	45.56	3	Horizontal	349	2.78	-	38.51	10.67	35.16
AV	11.09502G	46.23	54.00	-7.77	32.22	3	Horizontal	349	2.78	-	38.50	10.66	35.15

802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TnomVnom

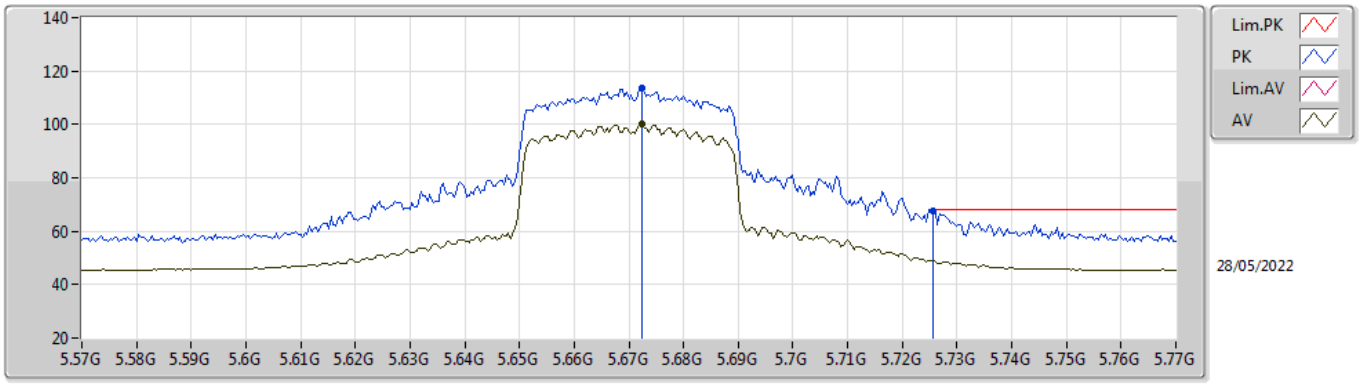


EUT X_2TX
Setting 15.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6724G	113.63	Inf	-Inf	107.26	3	Vertical	176	1.76	-	34.41	7.40	35.44
AV	5.6724G	100.40	Inf	-Inf	94.03	3	Vertical	176	1.76	-	34.41	7.40	35.44
PK	5.7256G	67.76	68.20	-0.44	61.57	3	Vertical	176	1.76	-	34.25	7.40	35.46

802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TnomVnom

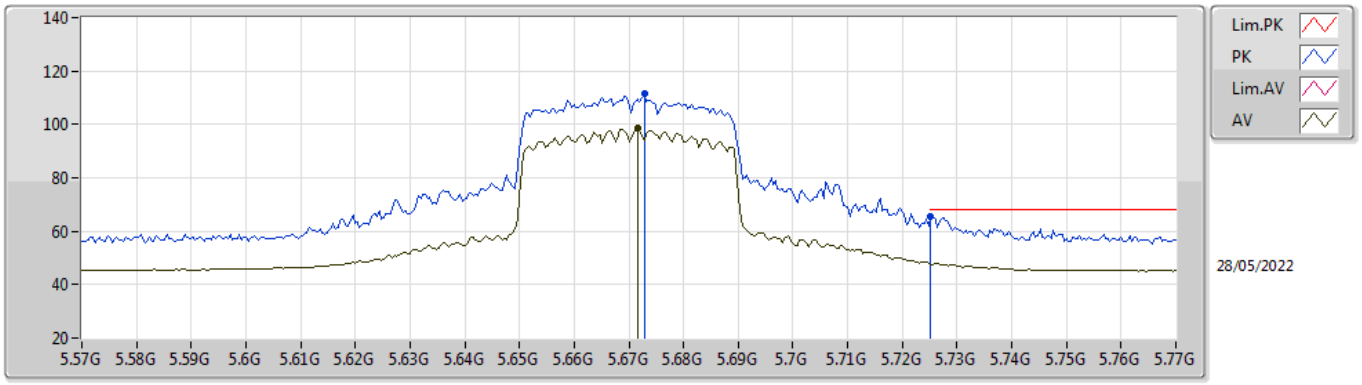


EUT X_2TX
Setting 15.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6728G	111.42	Inf	-Inf	105.05	3	Horizontal	186	3.00	-	34.41	7.40	35.44
AV	5.6716G	98.51	Inf	-Inf	92.14	3	Horizontal	186	3.00	-	34.41	7.40	35.44
PK	5.7252G	65.47	68.20	-2.73	59.28	3	Horizontal	186	3.00	-	34.25	7.40	35.46

802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TnomVnom

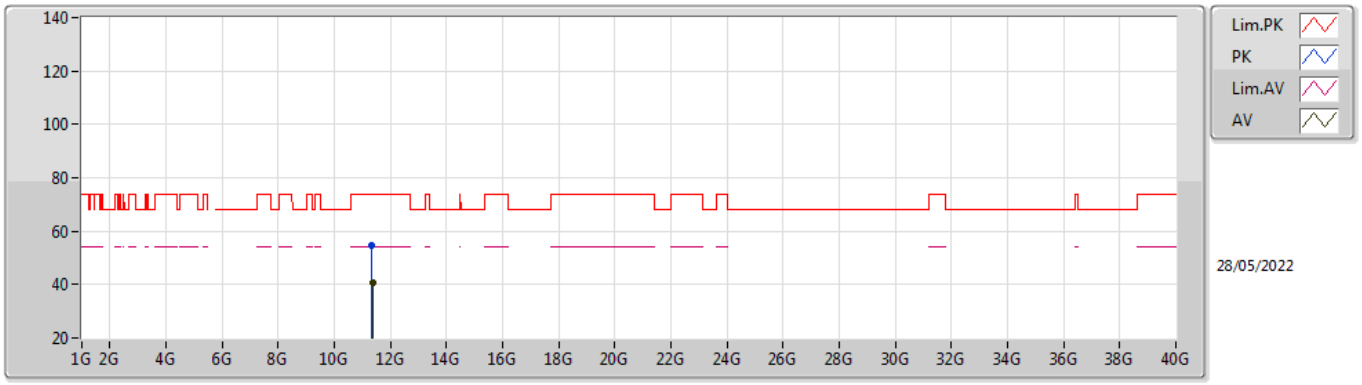


EUT X_2TX
Setting 15.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.34456G	54.51	74.00	-19.49	40.50	3	Vertical	163	1.48	-	38.74	10.70	35.43
AV	11.3538G	40.67	54.00	-13.33	26.66	3	Vertical	163	1.48	-	38.75	10.70	35.44

802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TnomVnom

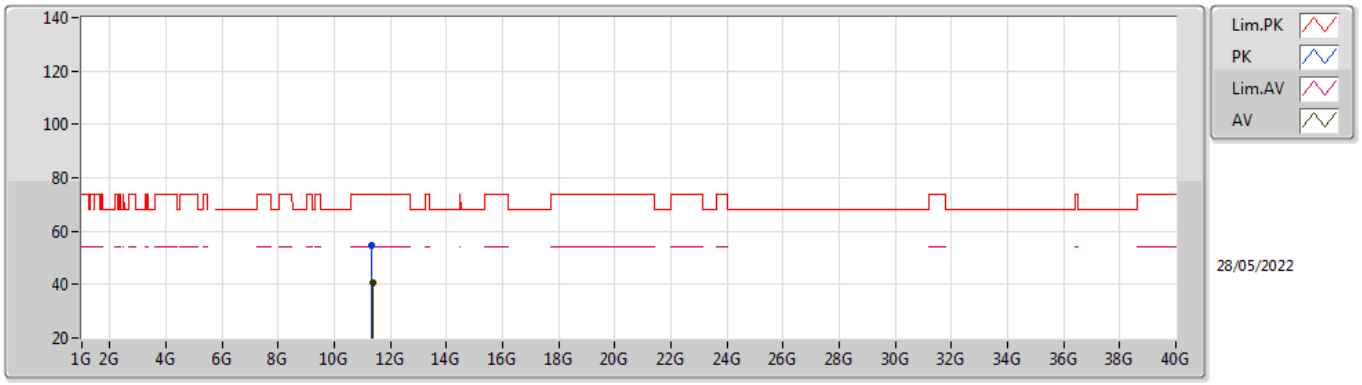


EUT X_2TX
Setting 15.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.3331G	54.58	74.00	-19.42	40.56	3	Horizontal	179	1.36	-	38.73	10.70	35.41
AV	11.35326G	40.67	54.00	-13.33	26.66	3	Horizontal	179	1.36	-	38.75	10.70	35.44

802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

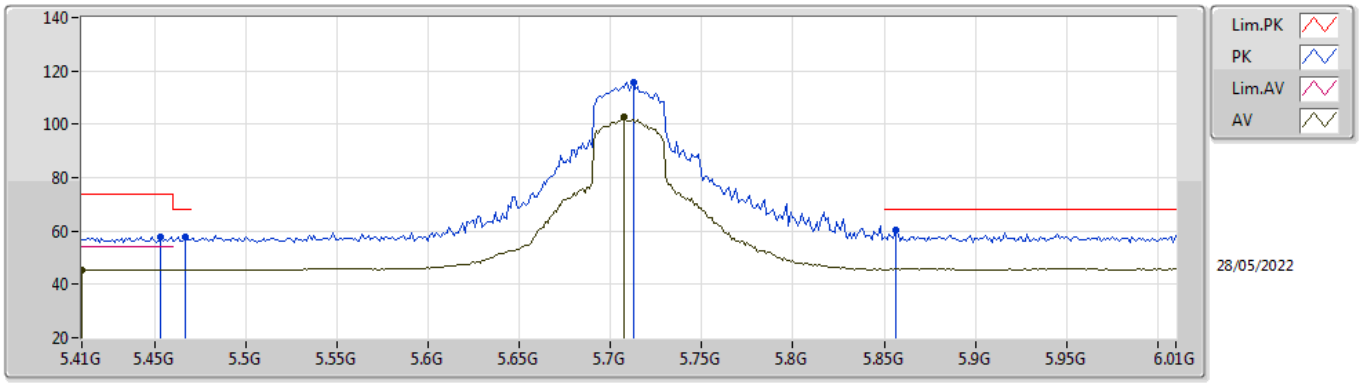


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4532G	58.01	74.00	-15.99	51.60	3	Vertical	177	1.66	-	34.51	7.25	35.35
AV	5.41G	45.35	54.00	-8.65	38.91	3	Vertical	177	1.66	-	34.58	7.21	35.35
PK	5.4664G	57.58	68.20	-10.62	51.13	3	Vertical	177	1.66	-	34.53	7.27	35.35
PK	5.7124G	115.91	Inf	-Inf	109.69	3	Vertical	177	1.66	-	34.28	7.40	35.46
AV	5.7076G	102.95	Inf	-Inf	96.72	3	Vertical	177	1.66	-	34.28	7.40	35.45
PK	5.8564G	60.14	68.20	-8.06	53.87	3	Vertical	177	1.66	-	34.34	7.46	35.53

802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

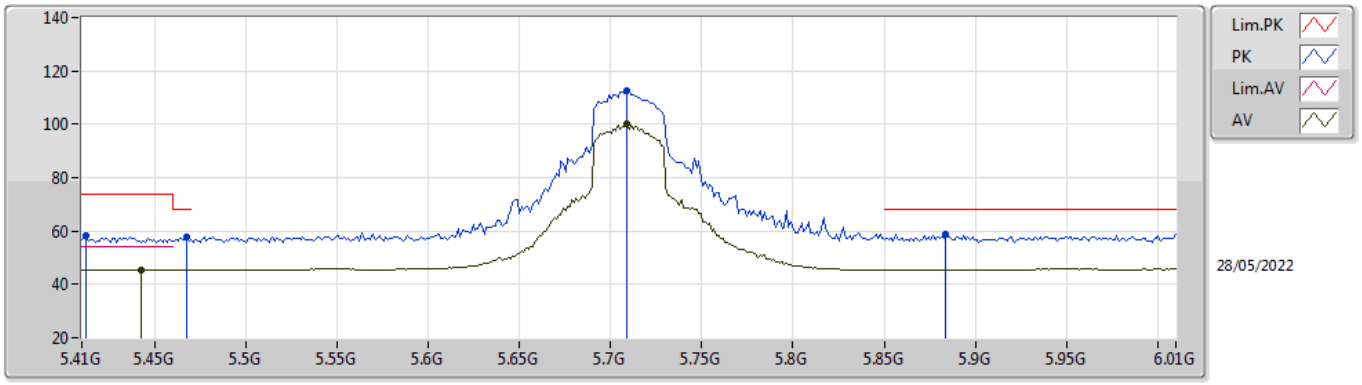


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4124G	58.10	74.00	-15.90	51.66	3	Horizontal	184	3.00	-	34.58	7.21	35.35
PK	5.4676G	57.74	68.20	-10.46	51.28	3	Horizontal	184	3.00	-	34.54	7.27	35.35
AV	5.4424G	45.33	54.00	-8.67	38.92	3	Horizontal	184	3.00	-	34.52	7.24	35.35
PK	5.7088G	112.69	Inf	-Inf	106.46	3	Horizontal	184	3.00	-	34.28	7.40	35.45
AV	5.7088G	100.27	Inf	-Inf	94.04	3	Horizontal	184	3.00	-	34.28	7.40	35.45
PK	5.884G	58.77	68.20	-9.43	52.33	3	Horizontal	184	3.00	-	34.50	7.48	35.54

802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

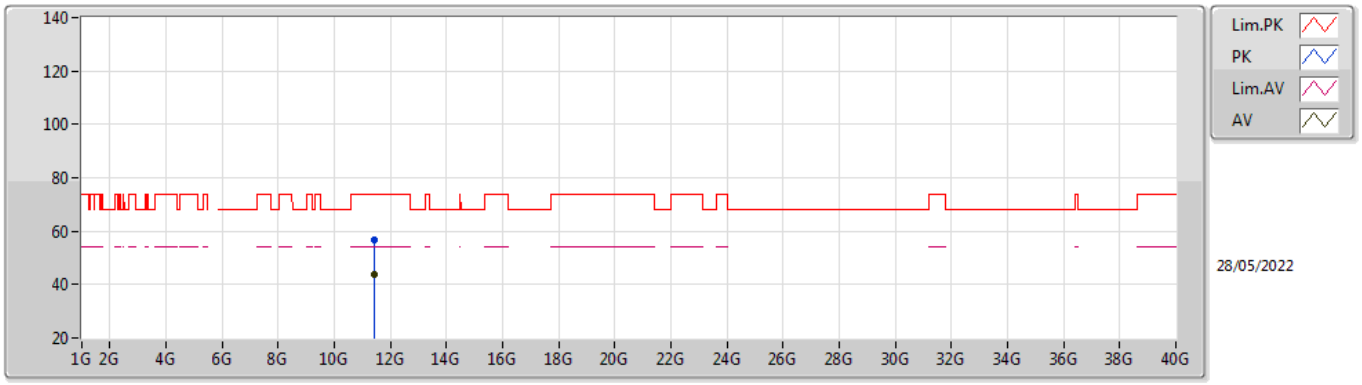


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.42258G	56.71	74.00	-17.29	42.66	3	Vertical	208	1.38	-	38.85	10.71	35.51
AV	11.42474G	43.79	54.00	-10.21	29.75	3	Vertical	208	1.38	-	38.85	10.71	35.52

802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

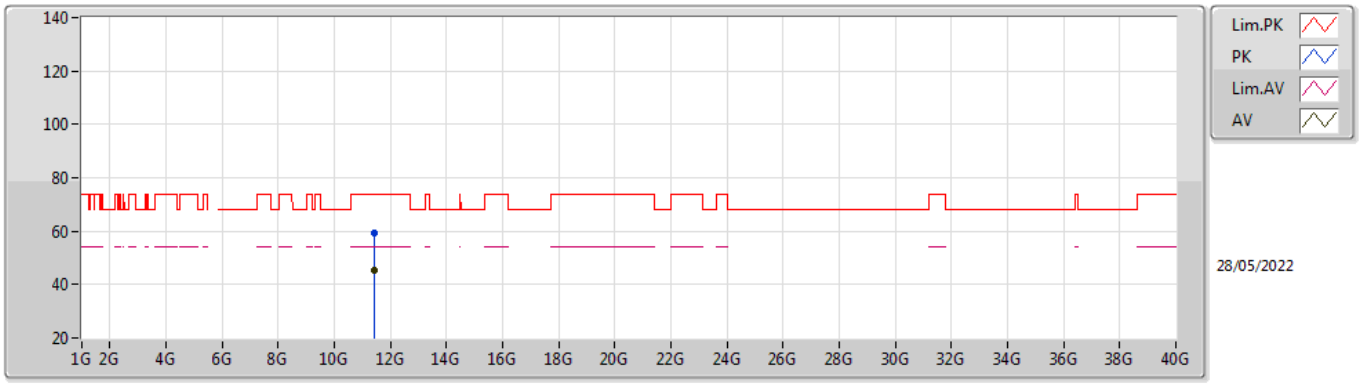


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.41502G	59.30	74.00	-14.70	45.26	3	Horizontal	138	2.07	-	38.83	10.71	35.50
AV	11.41532G	45.27	54.00	-8.73	31.24	3	Horizontal	138	2.07	-	38.83	10.71	35.51

802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TnomVnom

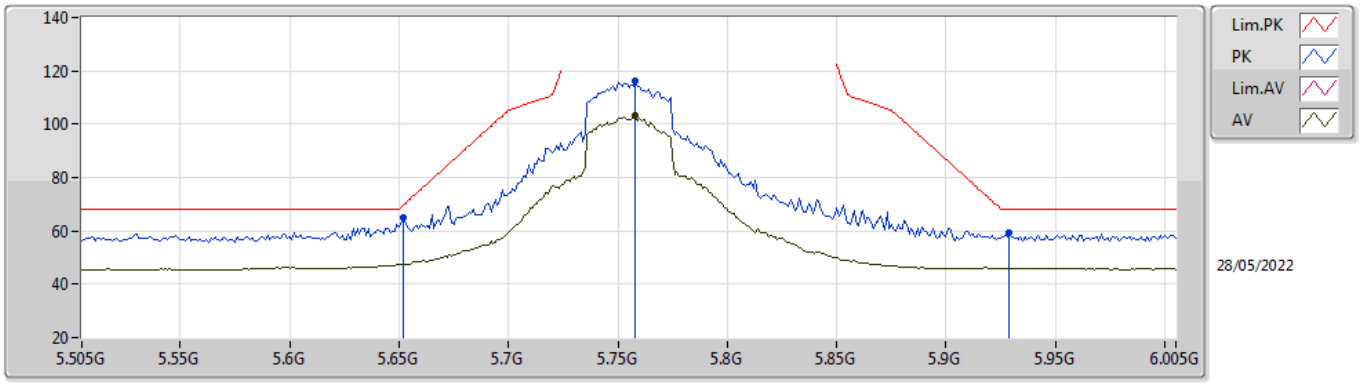


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.652G	64.82	69.68	-4.86	58.36	3	Vertical	175	1.63	-	34.49	7.40	35.43
PK	5.758G	115.95	Inf	-Inf	109.83	3	Vertical	175	1.63	-	34.20	7.40	35.48
AV	5.758G	103.09	Inf	-Inf	96.97	3	Vertical	175	1.63	-	34.20	7.40	35.48
PK	5.929G	59.17	68.20	-9.03	52.48	3	Vertical	175	1.63	-	34.72	7.53	35.56

802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TnomVnom

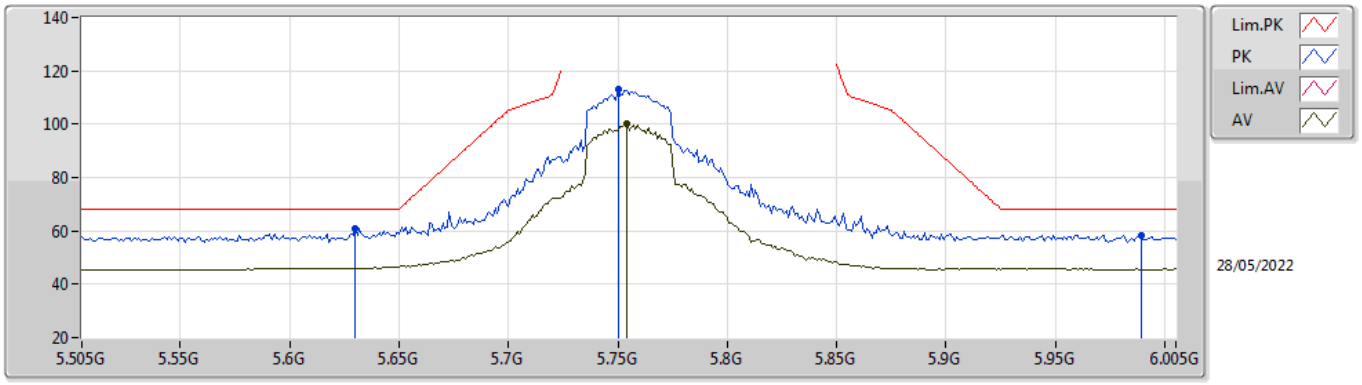


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.63G	61.11	68.20	-7.09	54.58	3	Horizontal	184	2.93	-	34.54	7.40	35.41
PK	5.75G	112.93	Inf	-Inf	106.81	3	Horizontal	184	2.93	-	34.20	7.40	35.48
AV	5.754G	100.13	Inf	-Inf	94.01	3	Horizontal	184	2.93	-	34.20	7.40	35.48
PK	5.989G	58.49	68.20	-9.71	51.69	3	Horizontal	184	2.93	-	34.80	7.59	35.59

802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TnomVnom

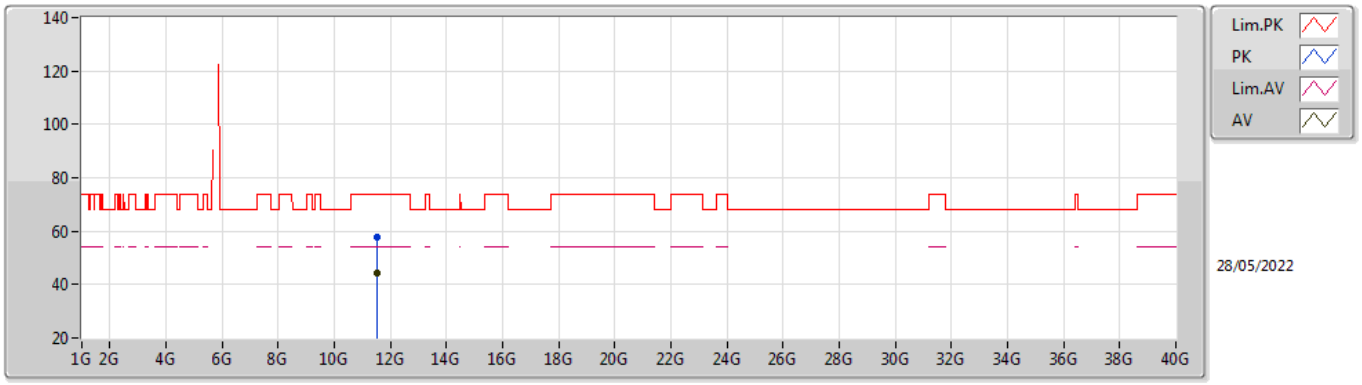


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.50892G	57.86	74.00	-16.14	43.69	3	Vertical	203	3.00	-	39.04	10.73	35.60
AV	11.50742G	44.38	54.00	-9.62	30.22	3	Vertical	203	3.00	-	39.03	10.73	35.60

802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TnomVnom

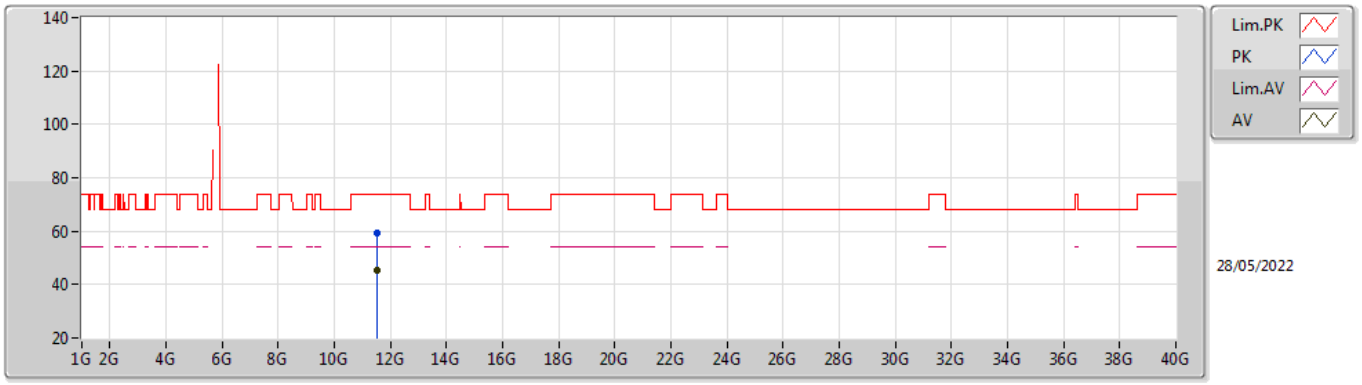


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5175G	59.26	74.00	-14.74	45.06	3	Horizontal	8	1.37	-	39.07	10.73	35.60
AV	11.50766G	45.41	54.00	-8.59	31.25	3	Horizontal	8	1.37	-	39.03	10.73	35.60

802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TnomVnom

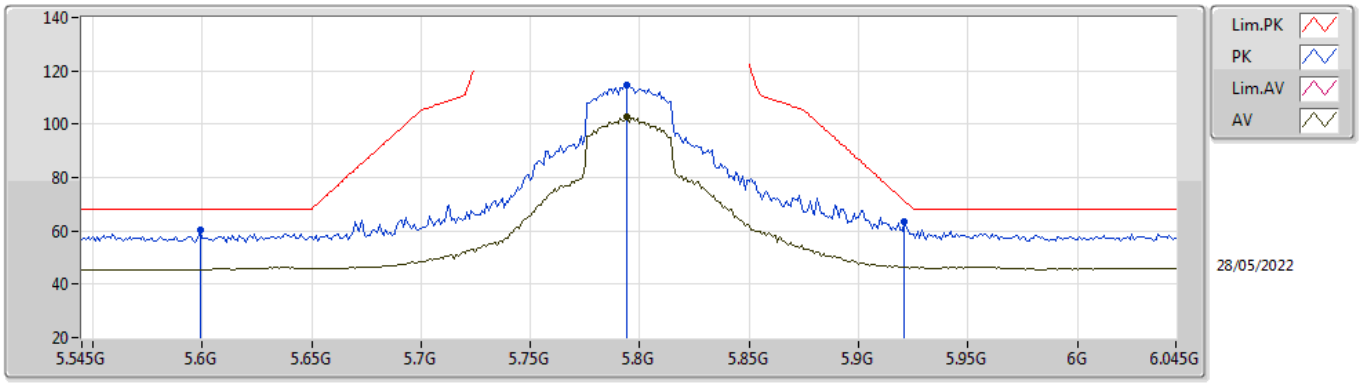


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.599G	60.34	68.20	-7.86	53.74	3	Vertical	174	1.79	-	34.60	7.40	35.40
PK	5.794G	114.49	Inf	-Inf	108.39	3	Vertical	174	1.79	-	34.20	7.40	35.50
AV	5.794G	102.53	Inf	-Inf	96.43	3	Vertical	174	1.79	-	34.20	7.40	35.50
PK	5.921G	63.69	71.16	-7.47	57.05	3	Vertical	174	1.79	-	34.68	7.52	35.56

802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TnomVnom

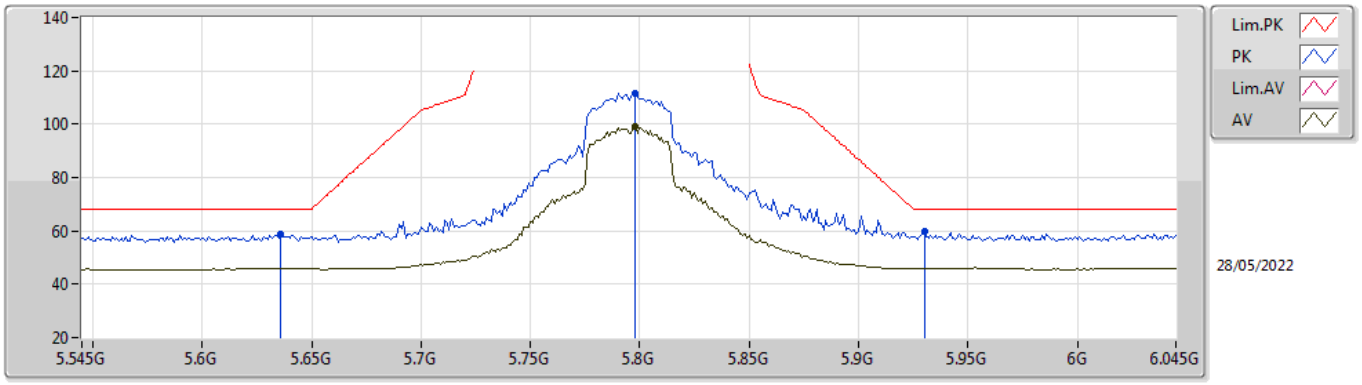


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.636G	58.56	68.20	-9.64	52.05	3	Horizontal	190	2.93	-	34.53	7.40	35.42
PK	5.798G	111.80	Inf	-Inf	105.70	3	Horizontal	190	2.93	-	34.20	7.40	35.50
AV	5.798G	99.20	Inf	-Inf	93.10	3	Horizontal	190	2.93	-	34.20	7.40	35.50
PK	5.93G	59.79	68.20	-8.41	53.10	3	Horizontal	190	2.93	-	34.72	7.53	35.56

802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TnomVnom

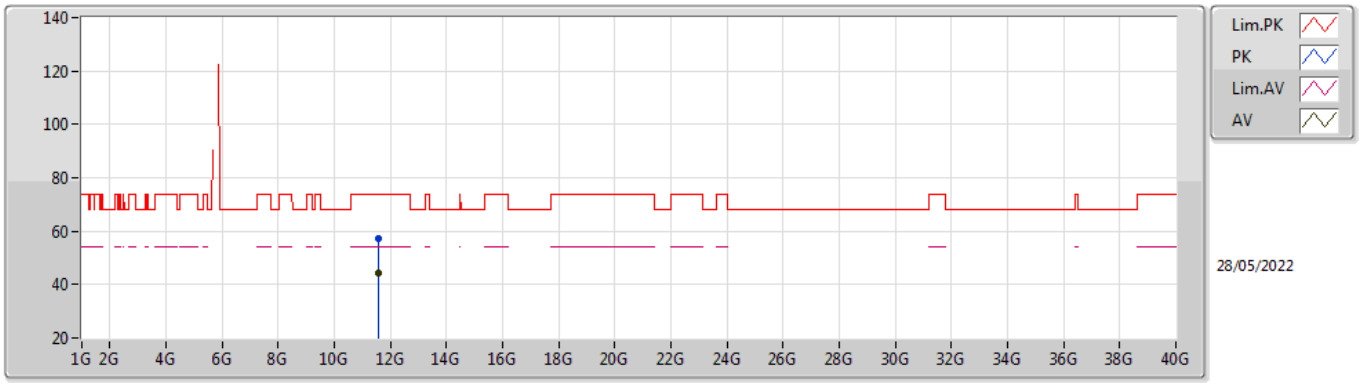


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.595G	57.08	74.00	-16.92	42.54	3	Vertical	219	2.60	-	39.38	10.74	35.58
AV	11.595G	44.20	54.00	-9.80	29.66	3	Vertical	219	2.60	-	39.38	10.74	35.58

802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TnomVnom

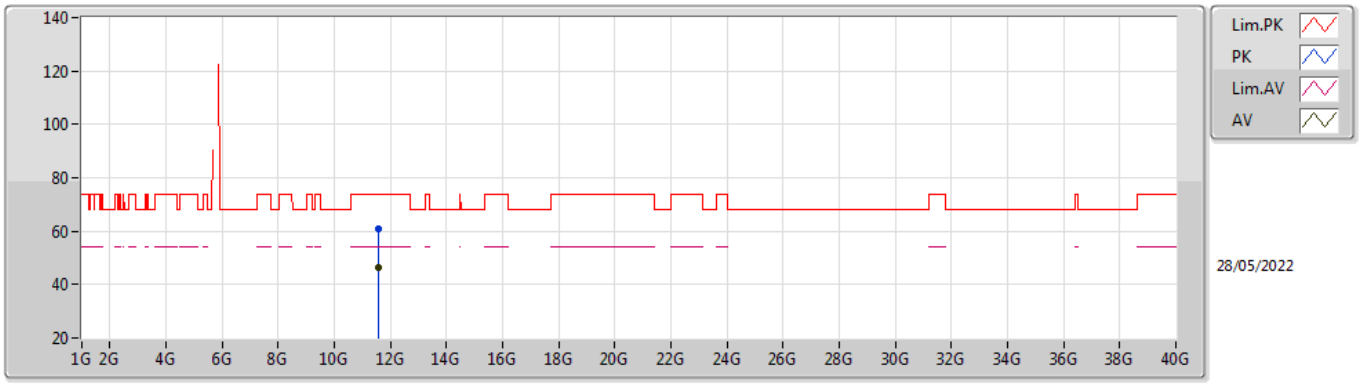


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.59114G	60.62	74.00	-13.38	46.10	3	Horizontal	199	2.11	-	39.36	10.74	35.58
AV	11.59048G	46.53	54.00	-7.47	32.01	3	Horizontal	199	2.11	-	39.36	10.74	35.58

802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TnomVnom

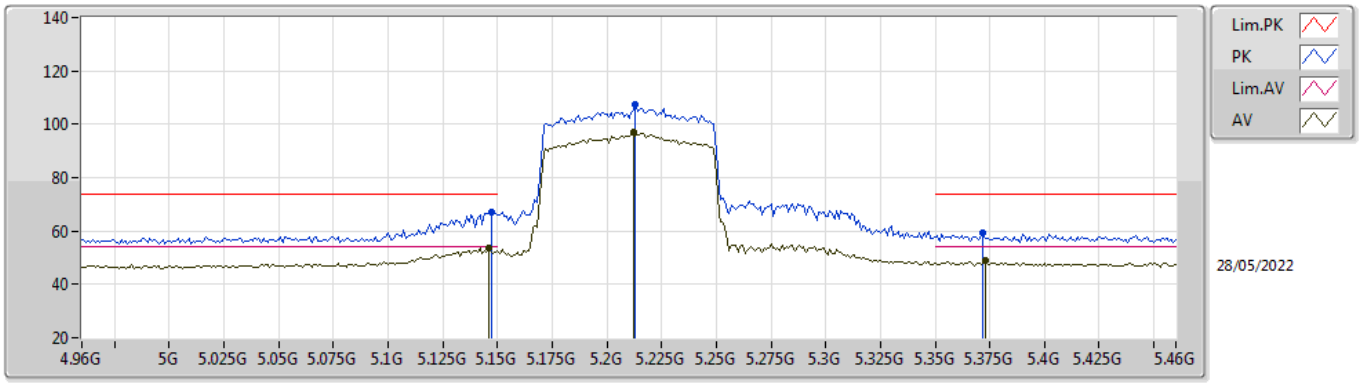


EUT X_2TX
Setting 14.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.147G	67.27	74.00	-6.73	61.45	3	Vertical	176	2.14	-	33.99	7.17	35.34
AV	5.146G	53.58	54.00	-0.42	47.76	3	Vertical	176	2.14	-	33.99	7.17	35.34
PK	5.213G	107.54	Inf	-Inf	101.43	3	Vertical	176	2.14	-	34.25	7.20	35.34
AV	5.212G	96.88	Inf	-Inf	90.77	3	Vertical	176	2.14	-	34.25	7.20	35.34
PK	5.372G	59.15	74.00	-14.85	52.75	3	Vertical	176	2.14	-	34.54	7.20	35.34
AV	5.373G	48.71	54.00	-5.29	42.30	3	Vertical	176	2.14	-	34.55	7.20	35.34

802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TnomVnom

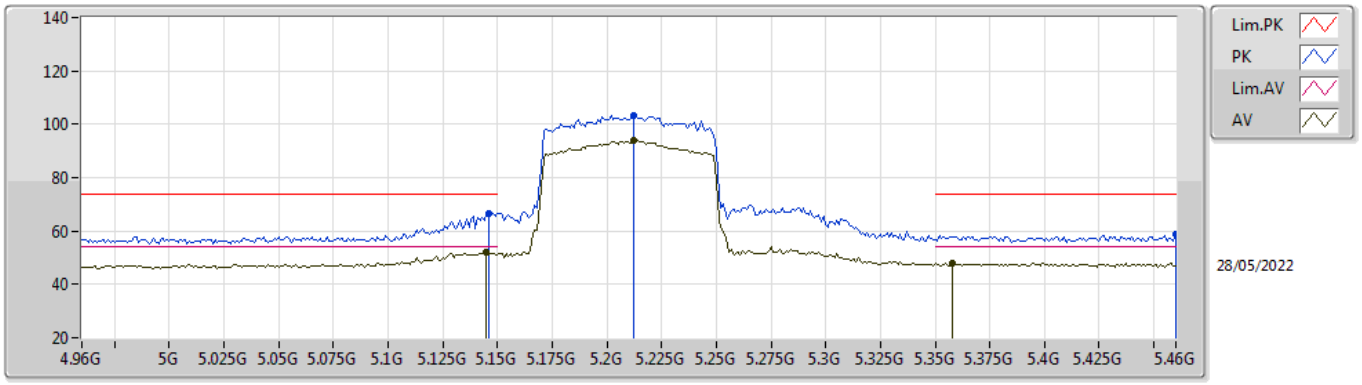


EUT X_2TX
Setting 14.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.146G	66.78	74.00	-7.22	60.96	3	Horizontal	184	2.21	-	33.99	7.17	35.34
AV	5.145G	51.88	54.00	-2.12	46.06	3	Horizontal	184	2.21	-	33.99	7.17	35.34
PK	5.212G	103.12	Inf	-Inf	97.01	3	Horizontal	184	2.21	-	34.25	7.20	35.34
AV	5.212G	94.12	Inf	-Inf	88.01	3	Horizontal	184	2.21	-	34.25	7.20	35.34
PK	5.46G	58.86	74.00	-15.14	52.43	3	Horizontal	184	2.21	-	34.52	7.26	35.35
AV	5.358G	48.09	54.00	-5.91	41.71	3	Horizontal	184	2.21	-	34.52	7.20	35.34

802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TnomVnom

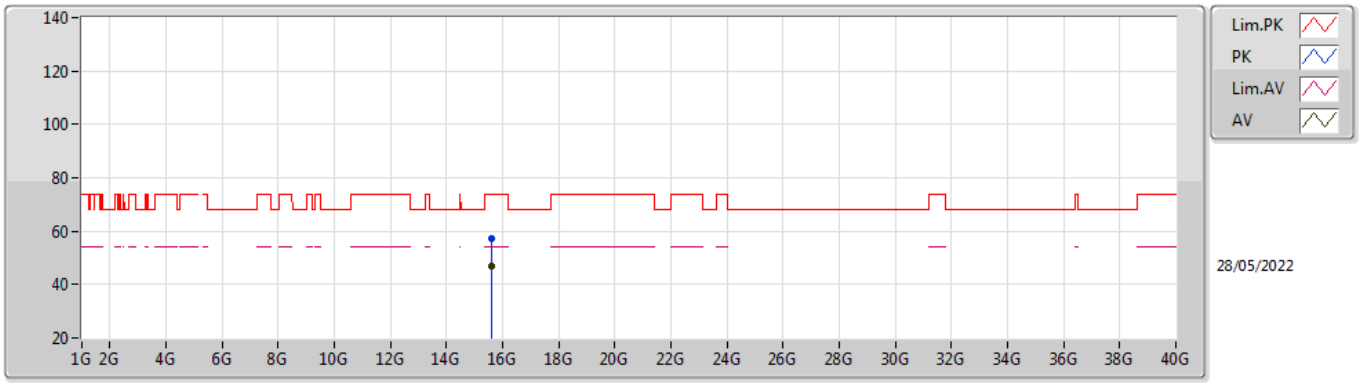


EUT X_2TX
Setting 14.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.61626G	57.26	74.00	-16.74	41.60	3	Vertical	13	1.60	-	37.92	13.21	35.47
AV	15.62118G	47.12	54.00	-6.88	31.49	3	Vertical	13	1.60	-	37.89	13.21	35.47

802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TnomVnom

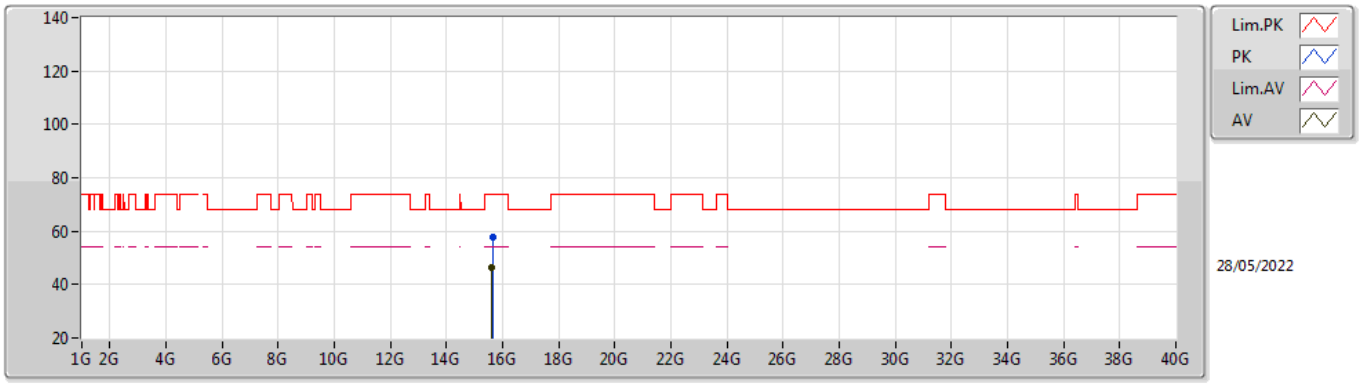


EUT X_2TX
Setting 14.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.63612G	57.81	74.00	-16.19	42.25	3	Horizontal	351	2.79	-	37.82	13.22	35.48
AV	15.62112G	46.59	54.00	-7.41	30.96	3	Horizontal	351	2.79	-	37.89	13.21	35.47

802.11ax HEW80_Nss1,(MCS0)_2TX

5290MHz_TnomVnom

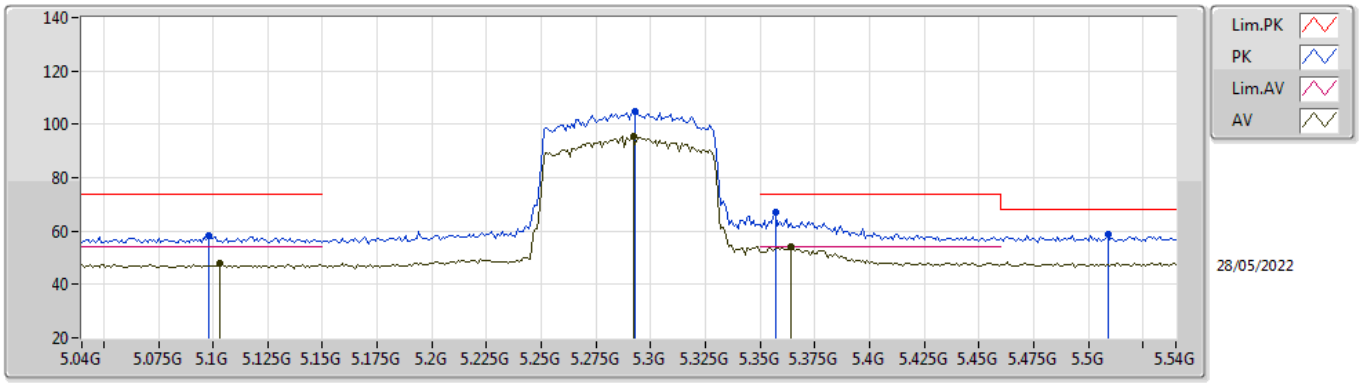


EUT X_2TX
Setting 12
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.098G	58.10	74.00	-15.90	52.38	3	Vertical	180	2.05	-	33.90	7.15	35.33
AV	5.103G	47.97	54.00	-6.03	42.24	3	Vertical	180	2.05	-	33.91	7.15	35.33
PK	5.293G	104.66	Inf	-Inf	98.31	3	Vertical	180	2.05	-	34.49	7.20	35.34
AV	5.292G	95.58	Inf	-Inf	89.24	3	Vertical	180	2.05	-	34.48	7.20	35.34
PK	5.357G	67.01	74.00	-6.99	60.64	3	Vertical	180	2.05	-	34.51	7.20	35.34
AV	5.364G	53.94	54.00	-0.06	47.55	3	Vertical	180	2.05	-	34.53	7.20	35.34
PK	5.509G	58.62	68.20	-9.58	52.06	3	Vertical	180	2.05	-	34.60	7.31	35.35

802.11ax HEW80_Nss1,(MCS0)_2TX

5290MHz_TnomVnom

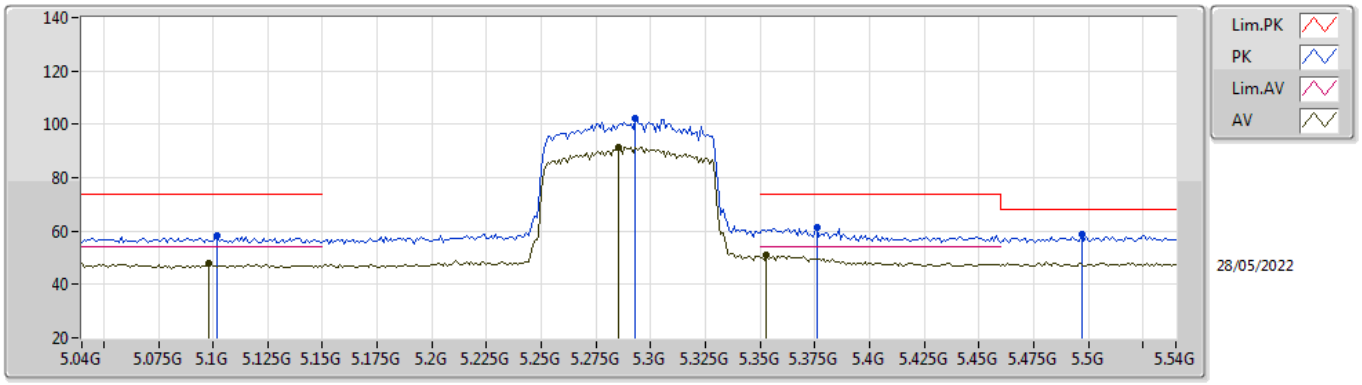


EUT X_2TX
Setting 12
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.102G	58.13	74.00	-15.87	52.41	3	Horizontal	201	1.92	-	33.90	7.15	35.33
AV	5.098G	47.78	54.00	-6.22	42.06	3	Horizontal	201	1.92	-	33.90	7.15	35.33
PK	5.293G	102.01	Inf	-Inf	95.66	3	Horizontal	201	1.92	-	34.49	7.20	35.34
AV	5.285G	91.51	Inf	-Inf	85.18	3	Horizontal	201	1.92	-	34.47	7.20	35.34
PK	5.376G	61.46	74.00	-12.54	55.06	3	Horizontal	201	1.92	-	34.55	7.20	35.35
AV	5.353G	51.18	54.00	-2.82	44.81	3	Horizontal	201	1.92	-	34.51	7.20	35.34
PK	5.497G	58.84	68.20	-9.36	52.30	3	Horizontal	201	1.92	-	34.59	7.30	35.35

802.11ax HEW80_Nss1,(MCS0)_2TX

5290MHz_TnomVnom

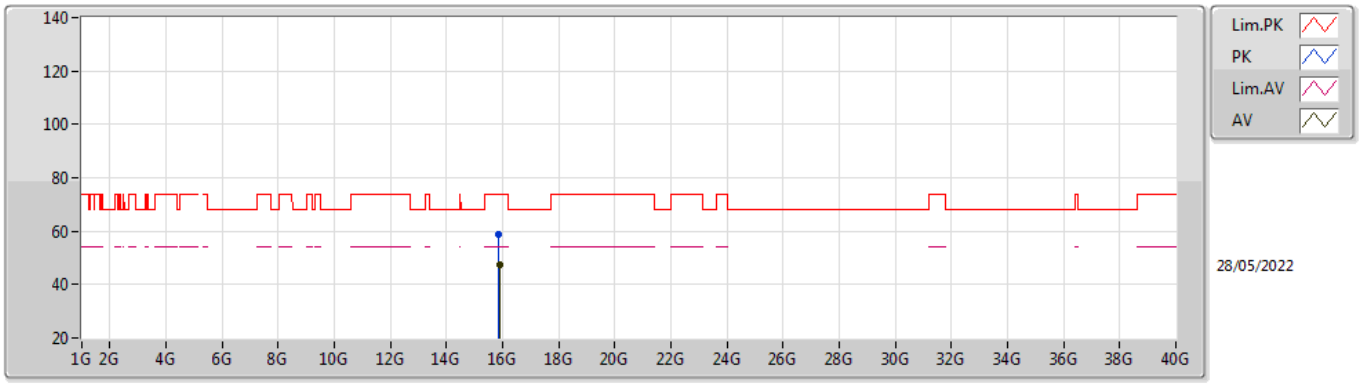


EUT X_2TX
Setting 12
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.86904G	58.85	74.00	-15.15	43.51	3	Vertical	101	1.18	-	37.69	13.33	35.68
AV	15.88092G	47.46	54.00	-6.54	32.15	3	Vertical	101	1.18	-	37.66	13.34	35.69

802.11ax HEW80_Nss1,(MCS0)_2TX

5290MHz_TnomVnom

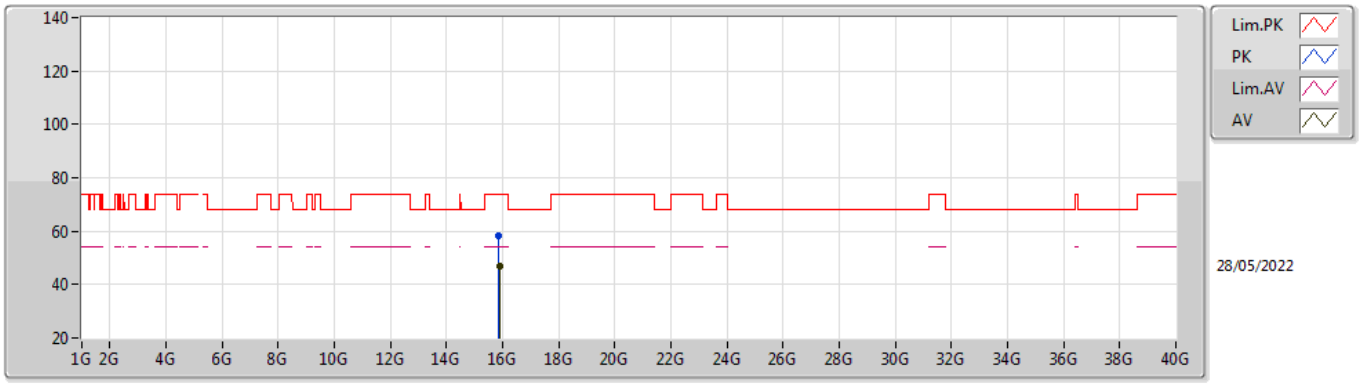


EUT X_2TX
Setting 12
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.85896G	58.38	74.00	-15.62	43.00	3	Horizontal	210	1.27	-	37.72	13.33	35.67
AV	15.8787G	47.12	54.00	-6.88	31.81	3	Horizontal	210	1.27	-	37.66	13.34	35.69

802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TnomVnom

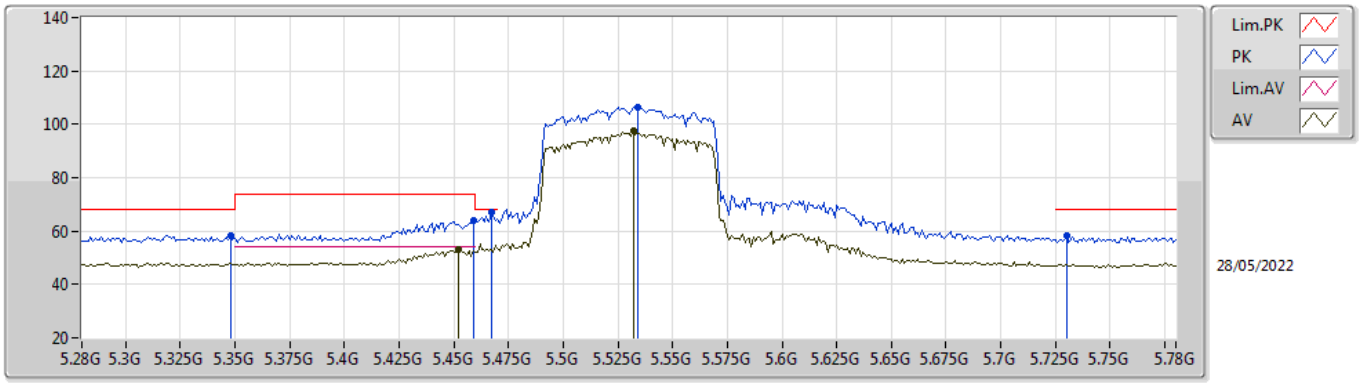


EUT X_2TX
Setting 14.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.348G	58.31	68.20	-9.89	51.95	3	Vertical	177	1.74	-	34.50	7.20	35.34
PK	5.459G	63.95	74.00	-10.05	57.52	3	Vertical	177	1.74	-	34.52	7.26	35.35
AV	5.452G	53.31	54.00	-0.69	46.91	3	Vertical	177	1.74	-	34.50	7.25	35.35
PK	5.467G	67.12	68.20	-1.08	60.67	3	Vertical	177	1.74	-	34.53	7.27	35.35
PK	5.534G	106.43	Inf	-Inf	99.87	3	Vertical	177	1.74	-	34.60	7.33	35.37
AV	5.532G	97.74	Inf	-Inf	91.18	3	Vertical	177	1.74	-	34.60	7.33	35.37
PK	5.73G	58.19	68.20	-10.01	52.02	3	Vertical	177	1.74	-	34.24	7.40	35.47

802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TnomVnom

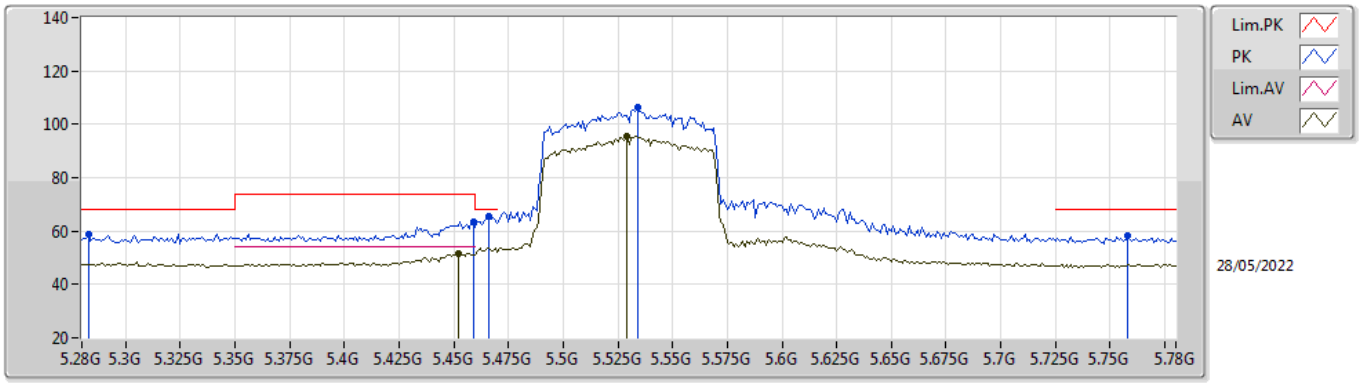


EUT X_2TX
Setting 14.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.283G	58.98	68.20	-9.22	52.65	3	Horizontal	185	3.00	-	34.47	7.20	35.34
PK	5.459G	63.59	74.00	-10.41	57.16	3	Horizontal	185	3.00	-	34.52	7.26	35.35
AV	5.452G	51.53	54.00	-2.47	45.13	3	Horizontal	185	3.00	-	34.50	7.25	35.35
PK	5.466G	65.49	68.20	-2.71	59.04	3	Horizontal	185	3.00	-	34.53	7.27	35.35
PK	5.534G	106.20	Inf	-Inf	99.64	3	Horizontal	185	3.00	-	34.60	7.33	35.37
AV	5.529G	95.46	Inf	-Inf	88.89	3	Horizontal	185	3.00	-	34.60	7.33	35.36
PK	5.758G	58.16	68.20	-10.04	52.04	3	Horizontal	185	3.00	-	34.20	7.40	35.48

802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TnomVnom

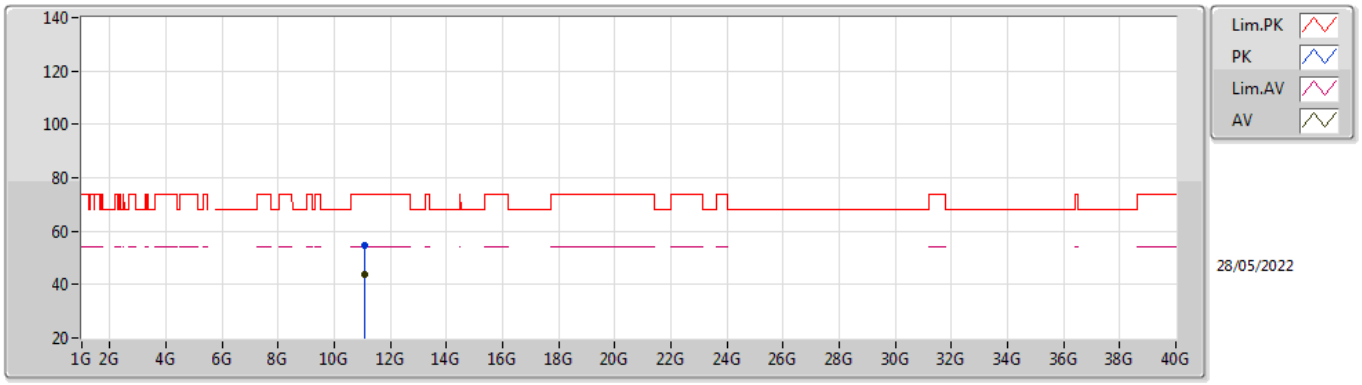


EUT X_2TX
Setting 14.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.06144G	54.62	74.00	-19.38	40.61	3	Vertical	226	2.94	-	38.46	10.66	35.11
AV	11.07296G	43.98	54.00	-10.02	29.97	3	Vertical	226	2.94	-	38.47	10.66	35.12

802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TnomVnom

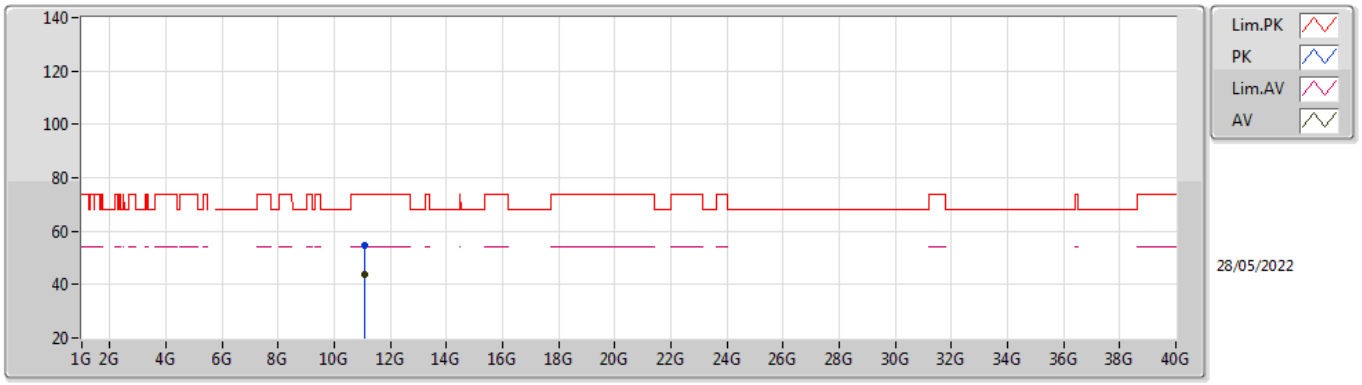


EUT X_2TX
Setting 14.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.07158G	54.64	74.00	-19.36	40.63	3	Horizontal	146	1.67	-	38.47	10.66	35.12
AV	11.06486G	43.95	54.00	-10.05	29.94	3	Horizontal	146	1.67	-	38.46	10.66	35.11

802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TnomVnom

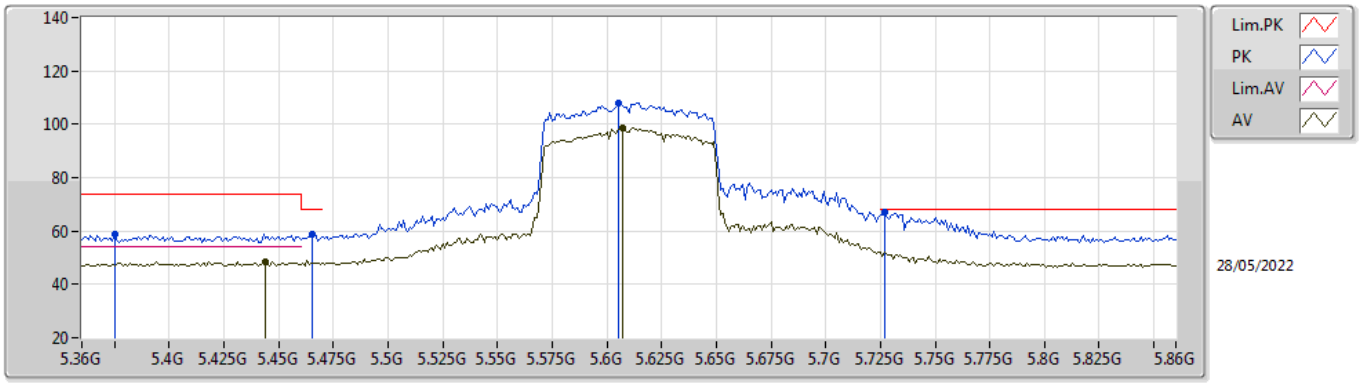


EUT X_2TX
Setting 14.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.375G	58.63	74.00	-15.37	52.22	3	Vertical	175	1.80	-	34.55	7.20	35.34
PK	5.465G	58.86	68.20	-9.34	52.42	3	Vertical	175	1.80	-	34.53	7.26	35.35
AV	5.444G	48.58	54.00	-5.42	42.18	3	Vertical	175	1.80	-	34.51	7.24	35.35
PK	5.605G	108.15	Inf	-Inf	101.56	3	Vertical	175	1.80	-	34.59	7.40	35.40
AV	5.607G	98.45	Inf	-Inf	91.86	3	Vertical	175	1.80	-	34.59	7.40	35.40
PK	5.727G	67.15	68.20	-1.05	60.96	3	Vertical	175	1.80	-	34.25	7.40	35.46

802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TnomVnom

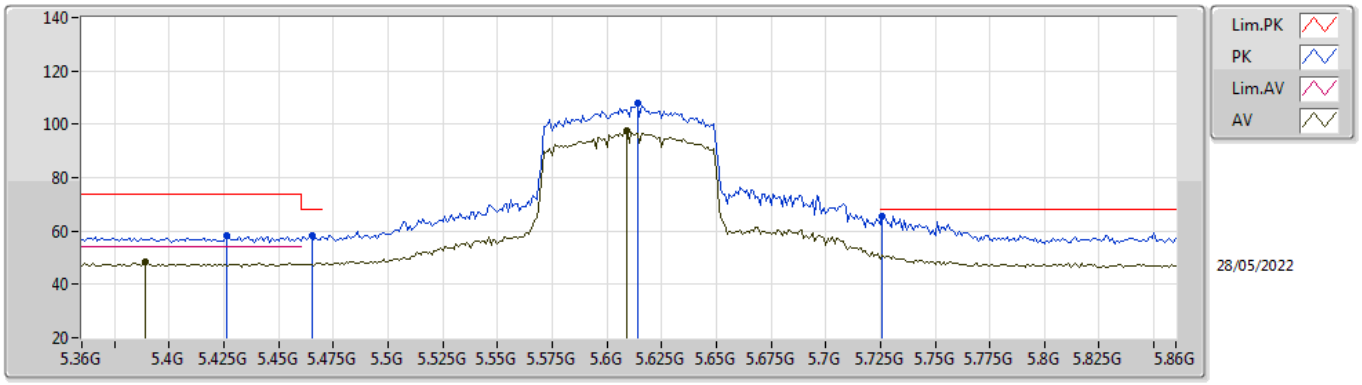


EUT X_2TX
Setting 14.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.426G	58.46	74.00	-15.54	52.03	3	Horizontal	189	2.94	-	34.55	7.23	35.35
AV	5.389G	48.35	54.00	-5.65	41.92	3	Horizontal	189	2.94	-	34.58	7.20	35.35
PK	5.465G	58.08	68.20	-10.12	51.64	3	Horizontal	189	2.94	-	34.53	7.26	35.35
PK	5.614G	107.99	Inf	-Inf	101.43	3	Horizontal	189	2.94	-	34.57	7.40	35.41
AV	5.609G	97.33	Inf	-Inf	90.75	3	Horizontal	189	2.94	-	34.58	7.40	35.40
PK	5.726G	65.56	68.20	-2.64	59.37	3	Horizontal	189	2.94	-	34.25	7.40	35.46

802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TnomVnom

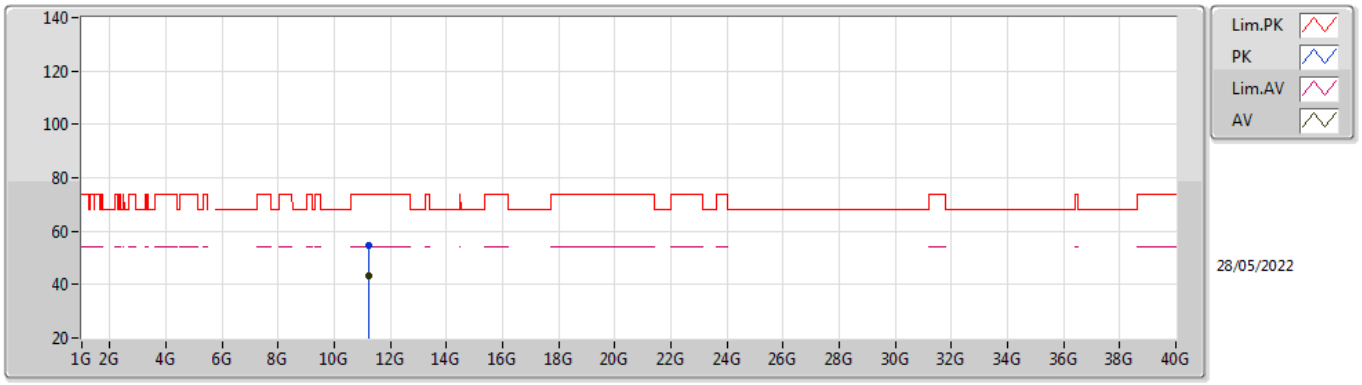


EUT X_2TX
Setting 14.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.20806G	54.87	74.00	-19.13	40.85	3	Vertical	24	2.90	-	38.61	10.68	35.27
AV	11.21994G	43.44	54.00	-10.56	29.43	3	Vertical	24	2.90	-	38.62	10.68	35.29

802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TnomVnom

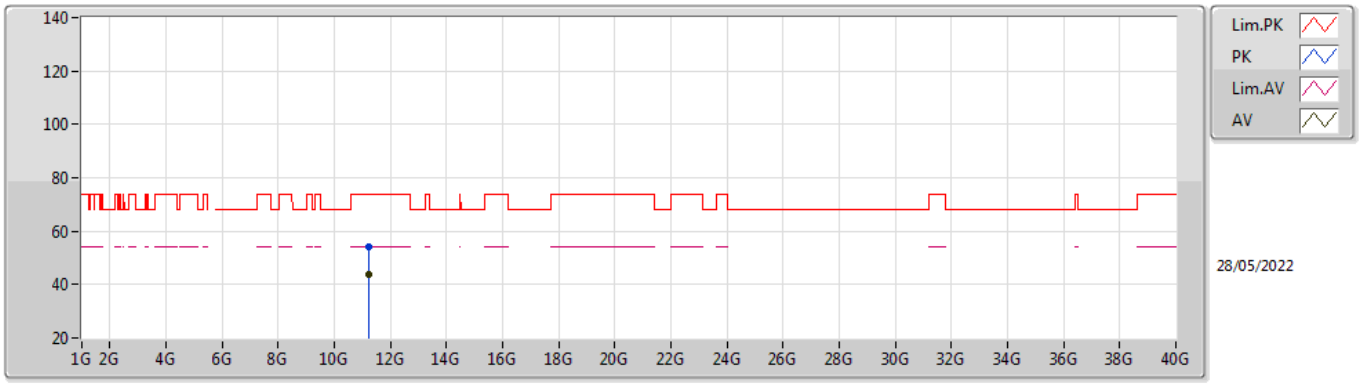


EUT X_2TX
Setting 14.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.20746G	54.28	74.00	-19.72	40.26	3	Horizontal	67	1.30	-	38.61	10.68	35.27
AV	11.22816G	43.59	54.00	-10.41	29.58	3	Horizontal	67	1.30	-	38.63	10.68	35.30

802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

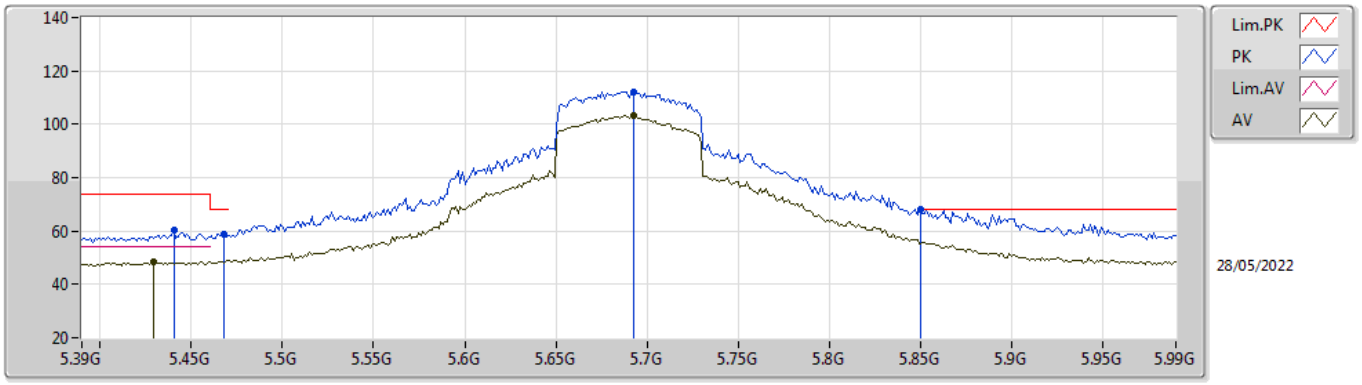


EUT X_2TX
Setting 20
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4404G	60.10	74.00	-13.90	53.69	3	Vertical	177	1.76	-	34.52	7.24	35.35
AV	5.4296G	48.61	54.00	-5.39	42.19	3	Vertical	177	1.76	-	34.54	7.23	35.35
PK	5.468G	58.69	68.20	-9.51	52.23	3	Vertical	177	1.76	-	34.54	7.27	35.35
PK	5.6924G	112.26	Inf	-Inf	105.98	3	Vertical	177	1.76	-	34.33	7.40	35.45
AV	5.6924G	103.34	Inf	-Inf	97.06	3	Vertical	177	1.76	-	34.33	7.40	35.45
PK	5.85G	68.03	68.20	-0.17	61.81	3	Vertical	177	1.76	-	34.30	7.45	35.53

802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

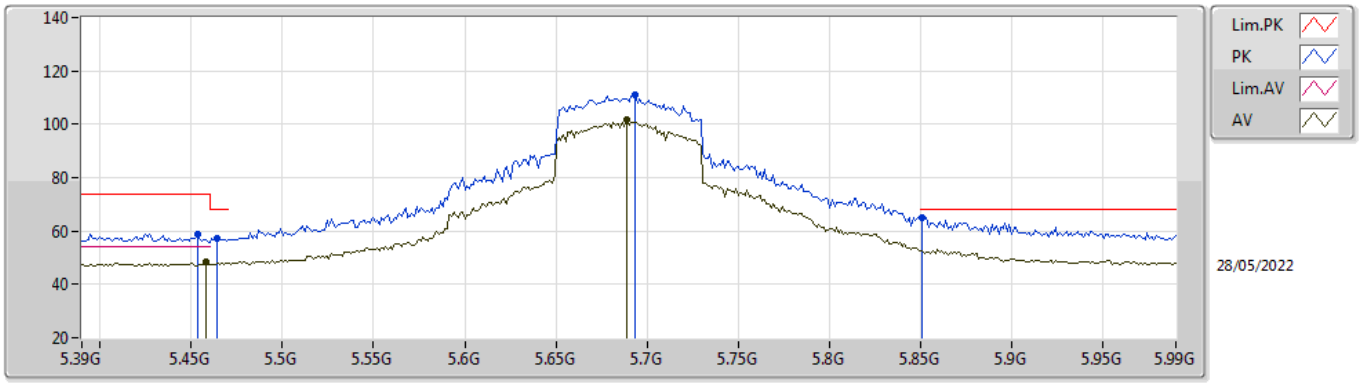


EUT X_2TX
Setting 20
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4536G	58.91	74.00	-15.09	52.50	3	Horizontal	185	3.00	-	34.51	7.25	35.35
AV	5.4584G	48.25	54.00	-5.75	41.82	3	Horizontal	185	3.00	-	34.52	7.26	35.35
PK	5.4644G	57.18	68.20	-11.02	50.74	3	Horizontal	185	3.00	-	34.53	7.26	35.35
PK	5.6936G	111.09	Inf	-Inf	104.81	3	Horizontal	185	3.00	-	34.33	7.40	35.45
AV	5.6888G	101.51	Inf	-Inf	95.21	3	Horizontal	185	3.00	-	34.34	7.40	35.44
PK	5.8508G	65.12	68.20	-3.08	58.90	3	Horizontal	185	3.00	-	34.30	7.45	35.53

802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

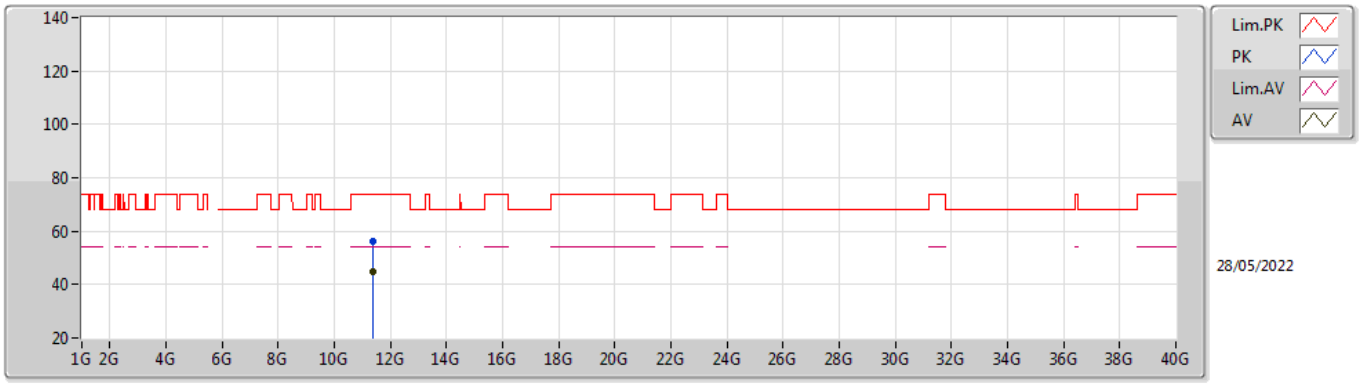


EUT X_2TX
Setting 20
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.37982G	55.99	74.00	-18.01	41.97	3	Vertical	213	3.00	-	38.78	10.71	35.47
AV	11.38306G	44.93	54.00	-9.07	30.91	3	Vertical	213	3.00	-	38.78	10.71	35.47

802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

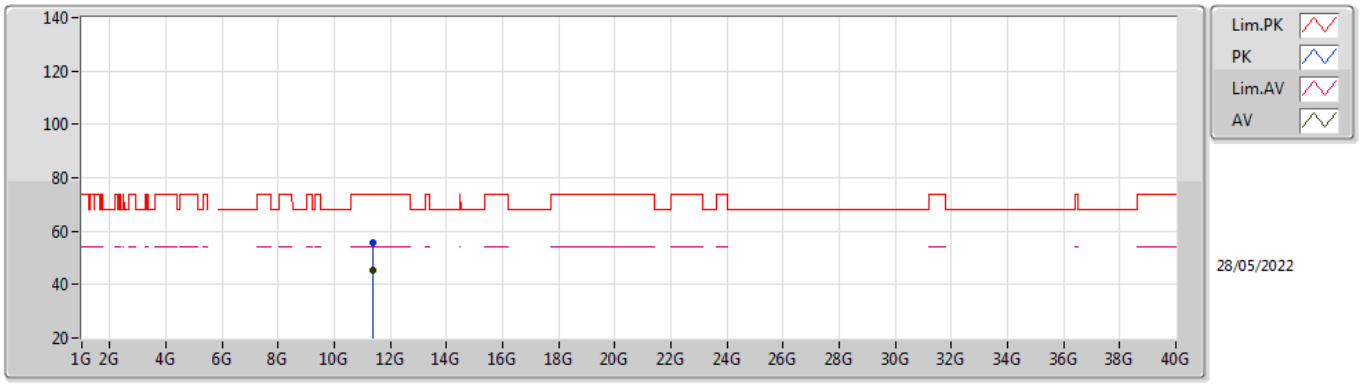


EUT X_2TX
Setting 20
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.39026G	55.85	74.00	-18.15	41.83	3	Horizontal	312	2.41	-	38.79	10.71	35.48
AV	11.38528G	45.16	54.00	-8.84	31.13	3	Horizontal	312	2.41	-	38.79	10.71	35.47

802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TnomVnom

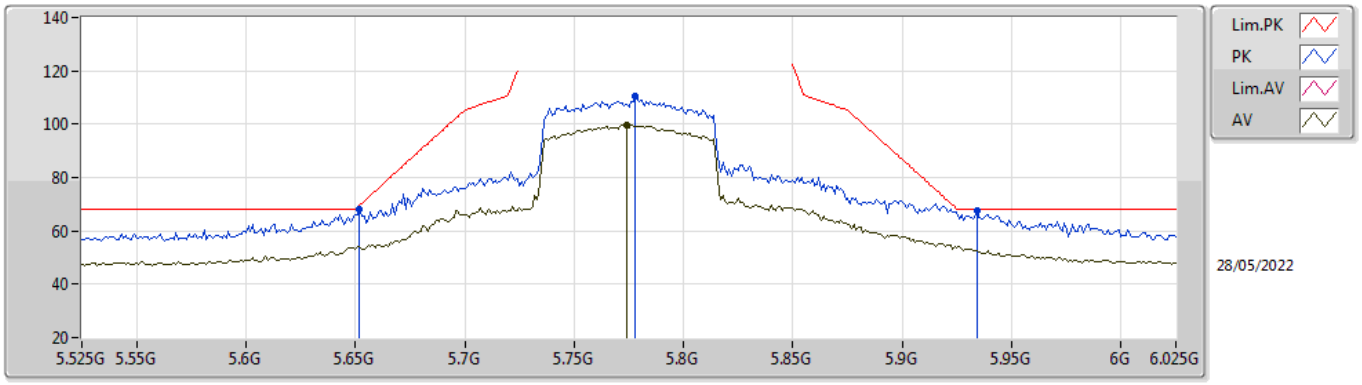


EUT X_2TX
Setting 17.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.652G	67.99	69.68	-1.69	61.53	3	Vertical	176	1.80	-	34.49	7.40	35.43
PK	5.778G	110.63	Inf	-Inf	104.52	3	Vertical	176	1.80	-	34.20	7.40	35.49
AV	5.774G	99.46	Inf	-Inf	93.35	3	Vertical	176	1.80	-	34.20	7.40	35.49
PK	5.934G	67.70	68.20	-0.50	61.00	3	Vertical	176	1.80	-	34.74	7.53	35.57

802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TnomVnom

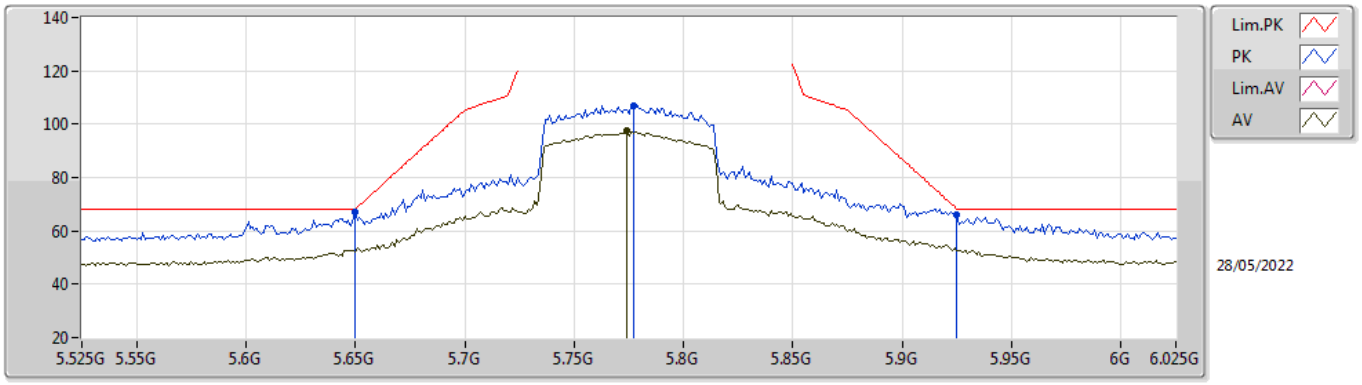


EUT X_2TX
Setting 17.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.65G	67.07	68.20	-1.13	60.60	3	Horizontal	186	2.83	-	34.50	7.40	35.43
PK	5.777G	107.01	Inf	-Inf	100.90	3	Horizontal	186	2.83	-	34.20	7.40	35.49
AV	5.774G	97.51	Inf	-Inf	91.40	3	Horizontal	186	2.83	-	34.20	7.40	35.49
PK	5.925G	65.78	68.20	-2.42	59.11	3	Horizontal	186	2.83	-	34.70	7.53	35.56

802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TnomVnom

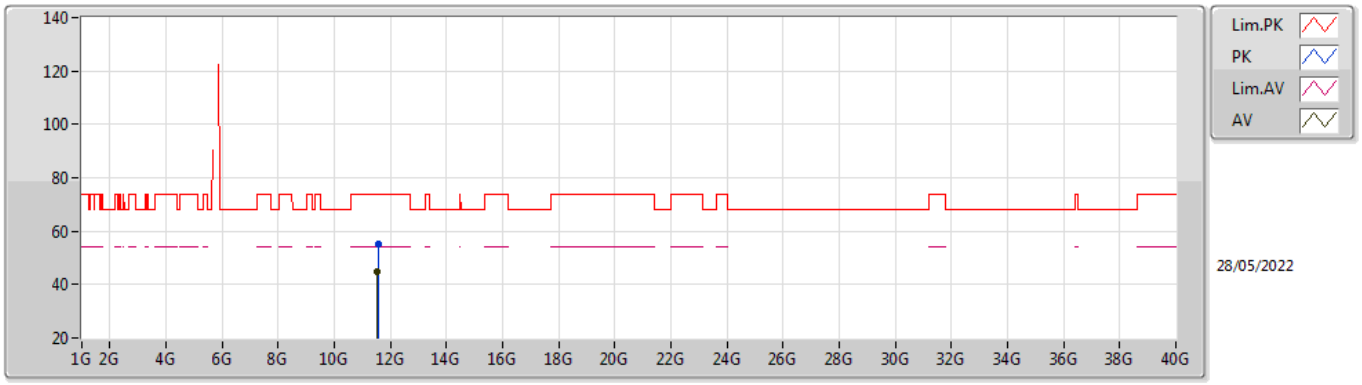


EUT X_2TX
Setting 17.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.55174G	55.33	74.00	-18.67	40.98	3	Vertical	120	1.78	-	39.21	10.73	35.59
AV	11.54688G	44.64	54.00	-9.36	30.31	3	Vertical	120	1.78	-	39.19	10.73	35.59

802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TnomVnom

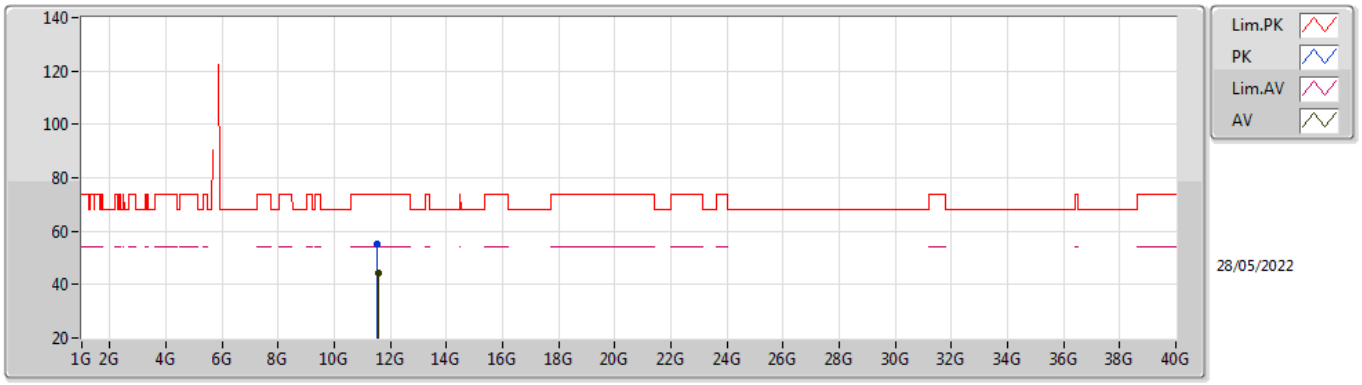


EUT X_2TX
Setting 17.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5431G	55.33	74.00	-18.67	41.02	3	Horizontal	43	1.49	-	39.17	10.73	35.59
AV	11.56008G	44.42	54.00	-9.58	30.04	3	Horizontal	43	1.49	-	39.24	10.73	35.59

802.11ax HEW160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

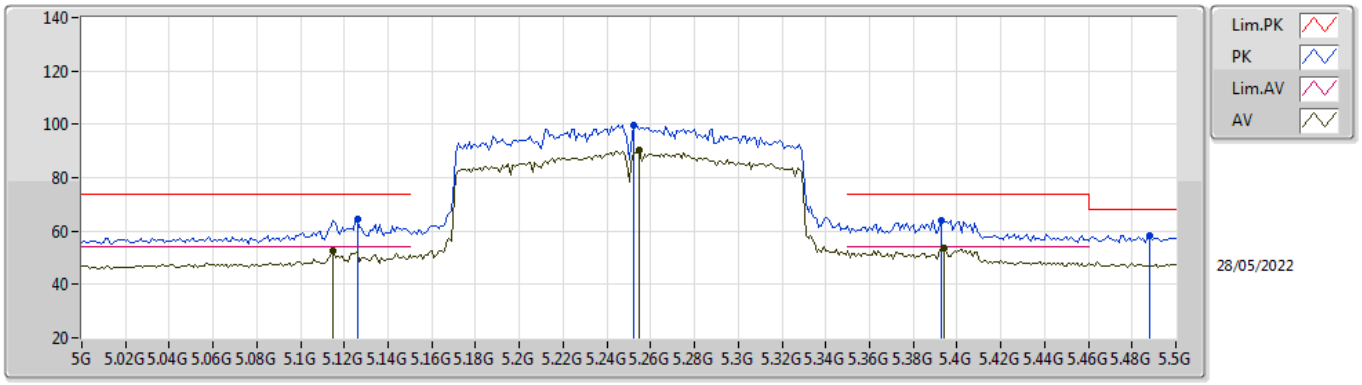


EUT X_2TX
Setting 10
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.126G	64.35	74.00	-9.65	58.58	3	Vertical	173	2.10	-	33.95	7.16	35.34
AV	5.115G	52.70	54.00	-1.30	46.94	3	Vertical	173	2.10	-	33.93	7.16	35.33
PK	5.252G	99.62	Inf	-Inf	93.36	3	Vertical	173	2.10	-	34.40	7.20	35.34
AV	5.255G	90.16	Inf	-Inf	83.89	3	Vertical	173	2.10	-	34.41	7.20	35.34
PK	5.393G	64.08	74.00	-9.92	57.64	3	Vertical	173	2.10	-	34.59	7.20	35.35
AV	5.394G	53.76	54.00	-0.24	47.32	3	Vertical	173	2.10	-	34.59	7.20	35.35
PK	5.488G	58.37	68.20	-9.83	51.85	3	Vertical	173	2.10	-	34.58	7.29	35.35

802.11ax HEW160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

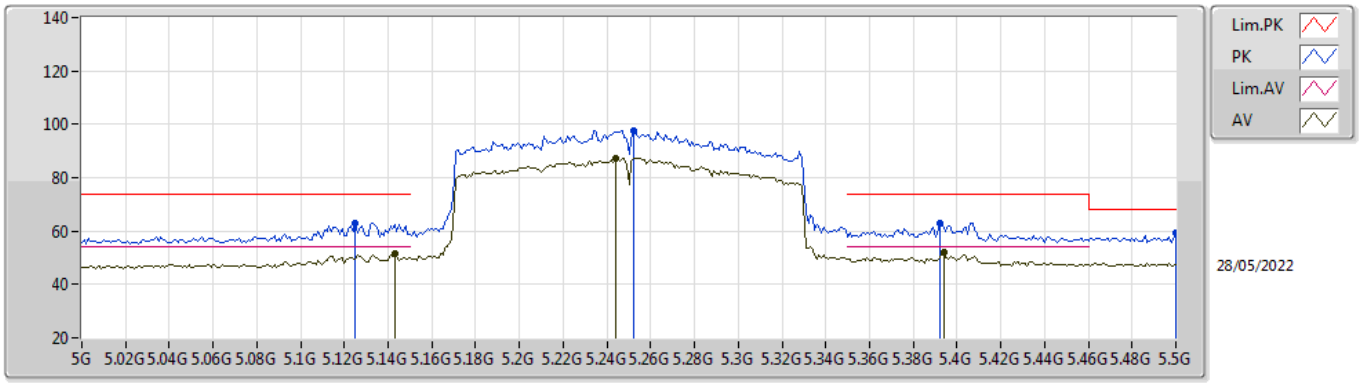


EUT X_2TX
Setting 10
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.125G	62.78	74.00	-11.22	57.01	3	Horizontal	185	2.23	-	33.95	7.16	35.34
AV	5.143G	51.80	54.00	-2.20	45.98	3	Horizontal	185	2.23	-	33.99	7.17	35.34
PK	5.252G	97.80	Inf	-Inf	91.54	3	Horizontal	185	2.23	-	34.40	7.20	35.34
AV	5.244G	87.40	Inf	-Inf	81.16	3	Horizontal	185	2.23	-	34.38	7.20	35.34
PK	5.392G	62.89	74.00	-11.11	56.46	3	Horizontal	185	2.23	-	34.58	7.20	35.35
AV	5.394G	51.87	54.00	-2.13	45.43	3	Horizontal	185	2.23	-	34.59	7.20	35.35
PK	5.5G	59.10	68.20	-9.10	52.55	3	Horizontal	185	2.23	-	34.60	7.30	35.35

802.11ax HEW160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

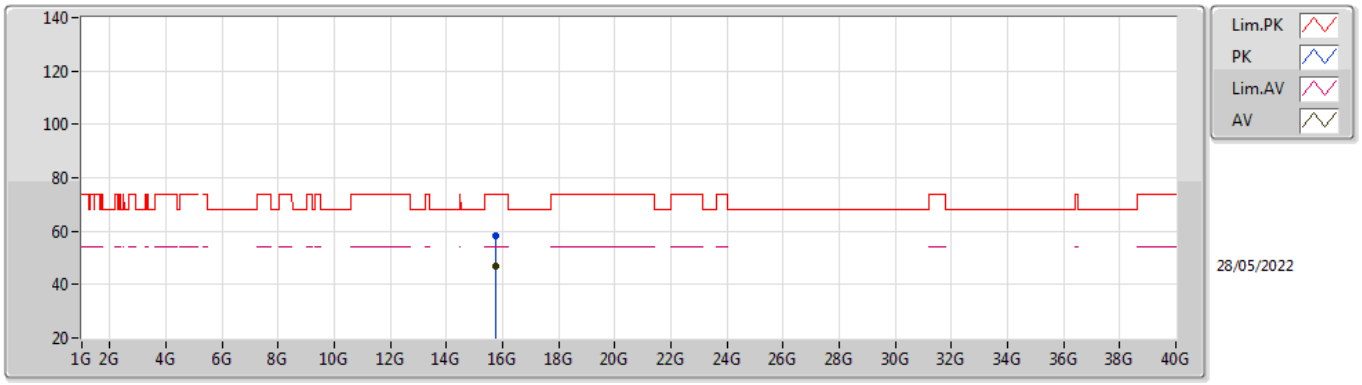


EUT X_2TX
Setting 10
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.74004G	58.10	74.00	-15.90	42.74	3	Vertical	308	2.21	-	37.66	13.27	35.57
AV	15.75708G	46.99	54.00	-7.01	31.57	3	Vertical	308	2.21	-	37.73	13.28	35.59

802.11ax HEW160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

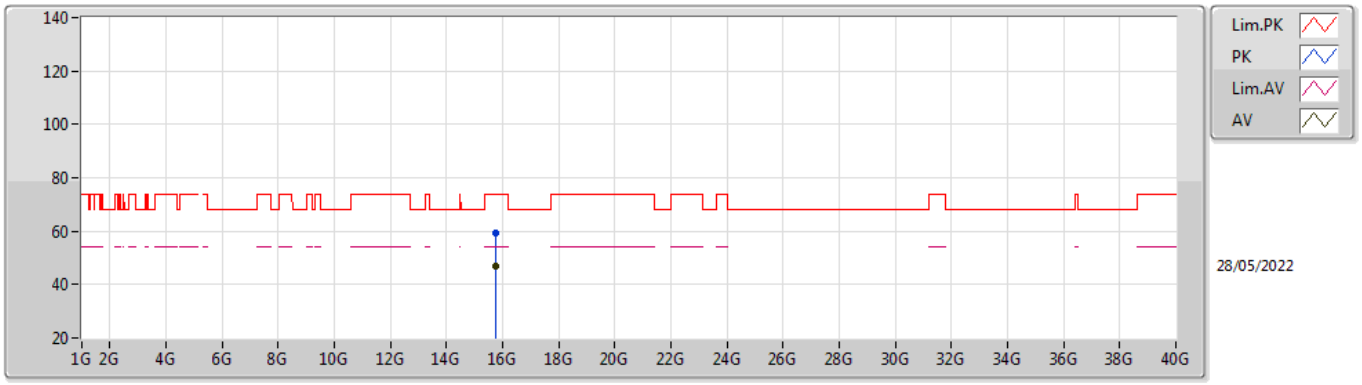


EUT X_2TX
Setting 10
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.75954G	59.34	74.00	-14.66	43.91	3	Horizontal	54	1.83	-	37.74	13.28	35.59
AV	15.76302G	47.09	54.00	-6.91	31.65	3	Horizontal	54	1.83	-	37.75	13.28	35.59

802.11ax HEW160_Nss1,(MCS0)_2TX

5570MHz_TnomVnom

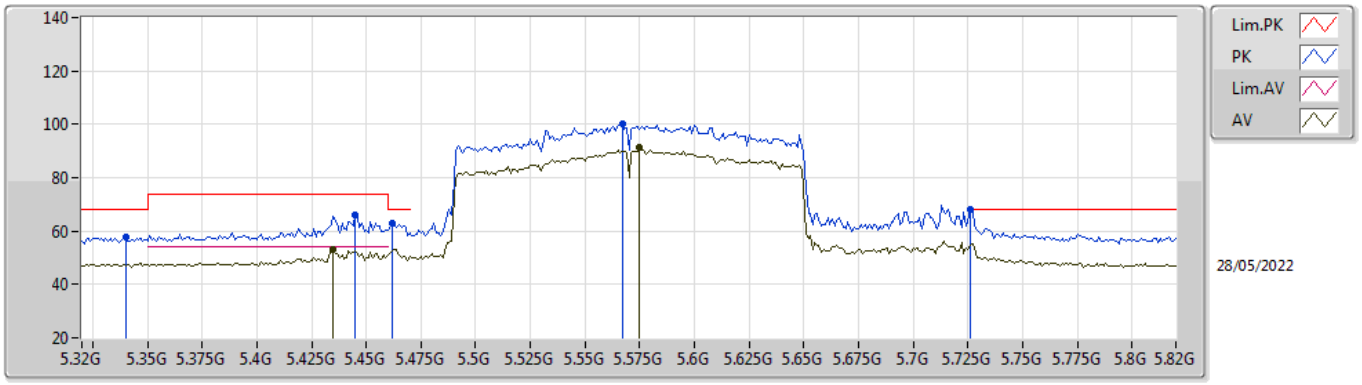


EUT X_2TX
Setting 10
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.34G	57.98	68.20	-10.22	51.62	3	Vertical	171	1.80	-	34.50	7.20	35.34
PK	5.445G	65.95	74.00	-8.05	59.54	3	Vertical	171	1.80	-	34.51	7.25	35.35
AV	5.435G	52.88	54.00	-1.12	46.46	3	Vertical	171	1.80	-	34.53	7.24	35.35
PK	5.462G	62.76	68.20	-5.44	56.33	3	Vertical	171	1.80	-	34.52	7.26	35.35
PK	5.567G	100.32	Inf	-Inf	93.73	3	Vertical	171	1.80	-	34.60	7.37	35.38
AV	5.575G	91.13	Inf	-Inf	84.55	3	Vertical	171	1.80	-	34.60	7.37	35.39
PK	5.726G	68.18	68.20	-0.02	61.99	3	Vertical	171	1.80	-	34.25	7.40	35.46

802.11ax HEW160_Nss1,(MCS0)_2TX

5570MHz_TnomVnom

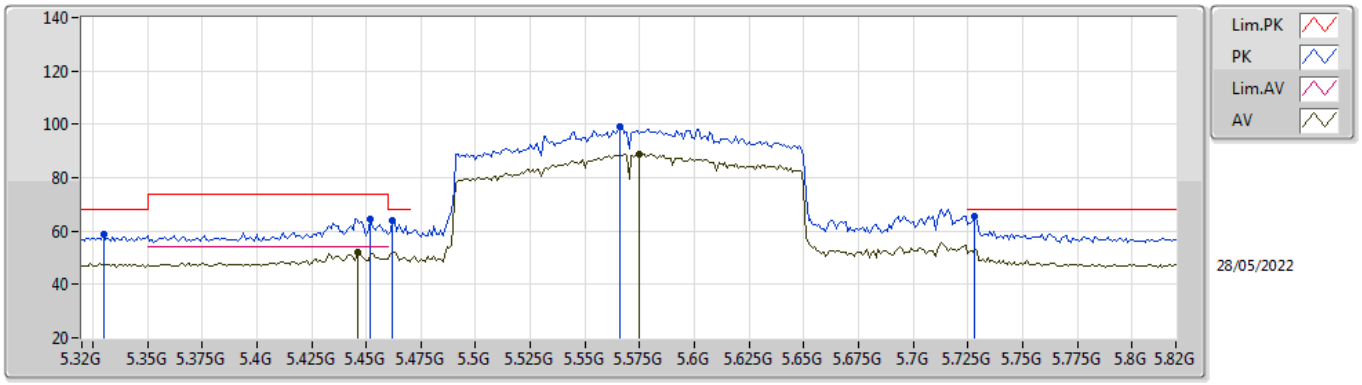


EUT X_2TX
Setting 10
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.33G	58.65	68.20	-9.55	52.29	3	Horizontal	187	2.98	-	34.50	7.20	35.34
PK	5.452G	64.72	74.00	-9.28	58.32	3	Horizontal	187	2.98	-	34.50	7.25	35.35
AV	5.446G	51.89	54.00	-2.11	45.48	3	Horizontal	187	2.98	-	34.51	7.25	35.35
PK	5.462G	63.77	68.20	-4.43	57.34	3	Horizontal	187	2.98	-	34.52	7.26	35.35
PK	5.566G	99.37	Inf	-Inf	92.78	3	Horizontal	187	2.98	-	34.60	7.37	35.38
AV	5.575G	89.05	Inf	-Inf	82.47	3	Horizontal	187	2.98	-	34.60	7.37	35.39
PK	5.728G	65.59	68.20	-2.61	59.41	3	Horizontal	187	2.98	-	34.24	7.40	35.46

802.11ax HEW160_Nss1,(MCS0)_2TX

5570MHz_TnomVnom

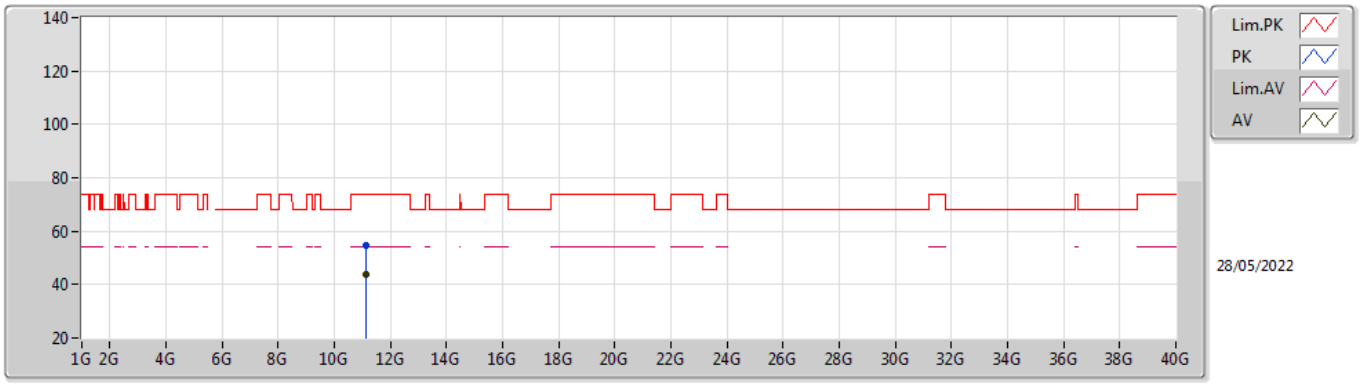


EUT X_2TX
Setting 10
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.14342G	54.74	74.00	-19.26	40.73	3	Vertical	287	1.89	-	38.54	10.67	35.20
AV	11.14576G	43.63	54.00	-10.37	29.61	3	Vertical	287	1.89	-	38.55	10.67	35.20

802.11ax HEW160_Nss1,(MCS0)_2TX

5570MHz_TnomVnom

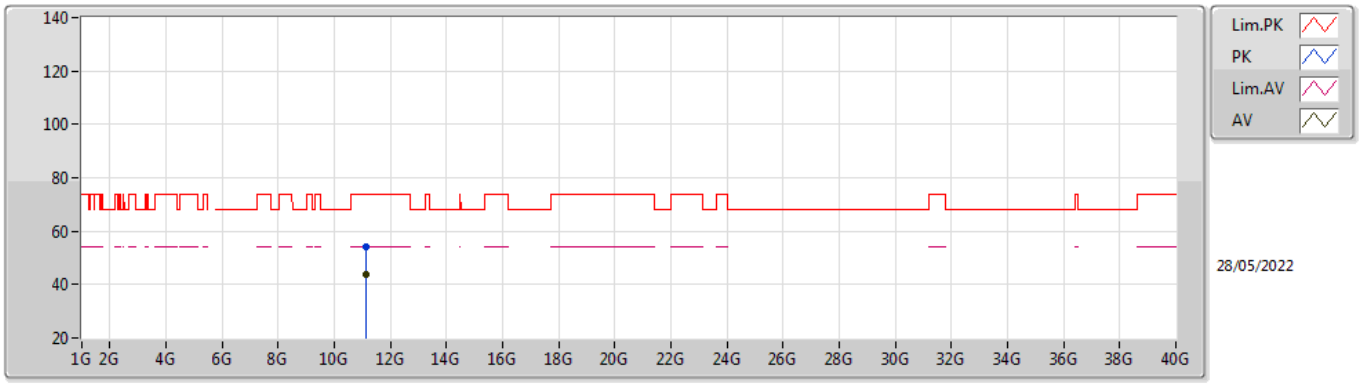

EUT X_2TX
Setting 10
03-B-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1445G	54.19	74.00	-19.81	40.18	3	Horizontal	126	1.12	-	38.54	10.67	35.20
AV	11.14588G	43.85	54.00	-10.15	29.83	3	Horizontal	126	1.12	-	38.55	10.67	35.20

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	PK	5.1496G	73.92	74.00	-0.08	3	Vertical	52	1.98	-

802.11a_Nss1,(6Mbps)_2TX

5180MHz_TnomVnom

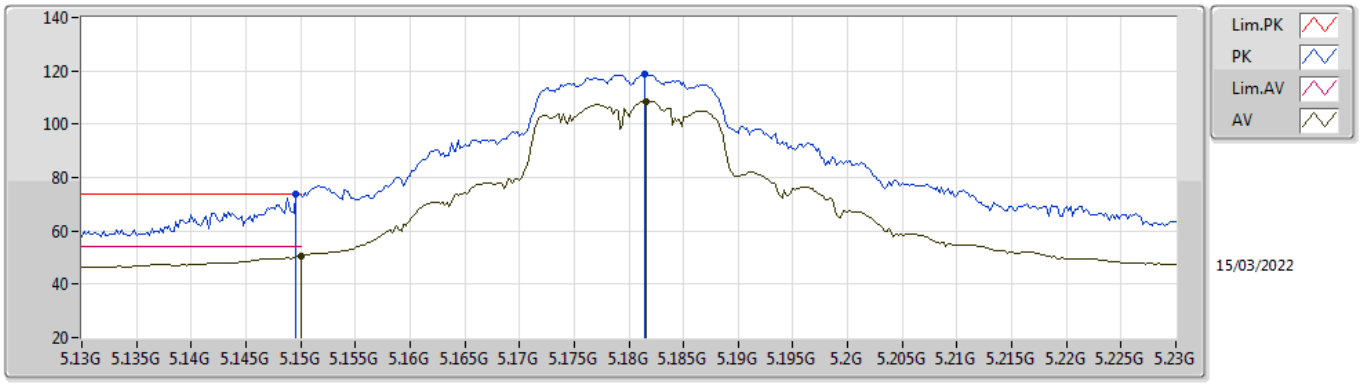


EUT Y_2TX
Setting 19
03-C-C-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1496G	73.92	74.00	-0.08	68.09	3	Vertical	52	1.98	-	34.00	7.17	35.34
AV	5.15G	50.54	54.00	-3.46	44.71	3	Vertical	52	1.98	-	34.00	7.17	35.34
PK	5.1814G	118.91	Inf	-Inf	112.93	3	Vertical	52	1.98	-	34.13	7.19	35.34
AV	5.1816G	108.59	Inf	-Inf	102.61	3	Vertical	52	1.98	-	34.13	7.19	35.34

802.11a_Nss1,(6Mbps)_2TX

5180MHz_TnomVnom

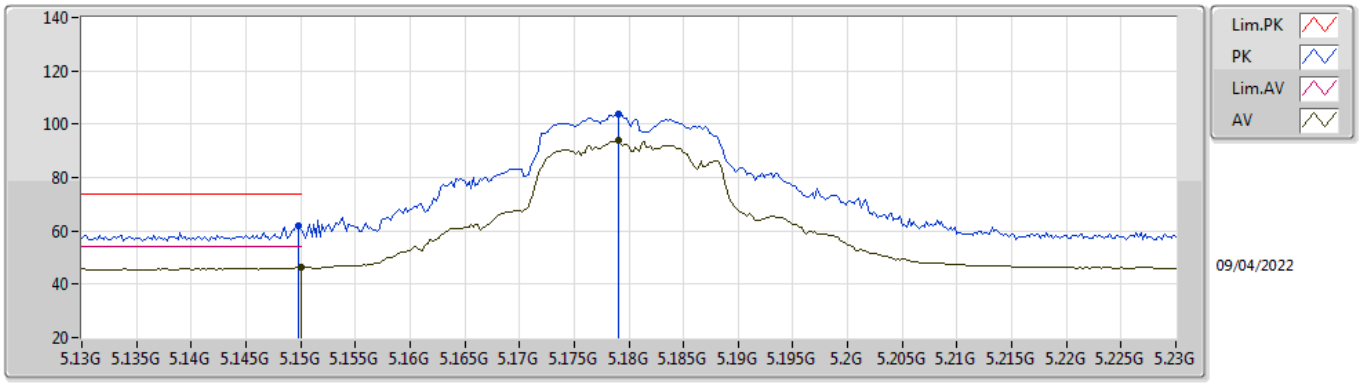


EUT Y_2TX
Setting 19.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1498G	61.69	74.00	-12.31	55.86	3	Horizontal	162	1.72	-	34.00	7.17	35.34
AV	5.15G	46.24	54.00	-7.76	40.41	3	Horizontal	162	1.72	-	34.00	7.17	35.34
PK	5.179G	103.59	Inf	-Inf	97.62	3	Horizontal	162	1.72	-	34.12	7.19	35.34
AV	5.179G	93.79	Inf	-Inf	87.82	3	Horizontal	162	1.72	-	34.12	7.19	35.34

802.11a_Nss1,(6Mbps)_2TX

5180MHz_TnomVnom

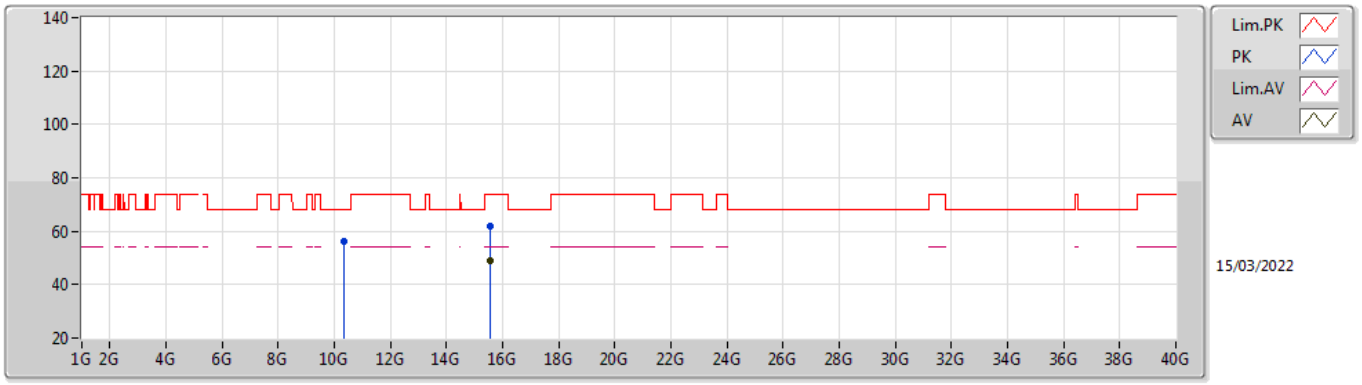


EUT Y_2TX
Setting 19
03-C-C-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.35988G	56.42	68.20	-11.78	43.29	3	Vertical	205	1.80	-	38.16	10.55	35.58
PK	15.53552G	61.85	74.00	-12.15	45.63	3	Vertical	238	1.91	-	38.45	13.17	35.40
AV	15.53916G	48.89	54.00	-5.11	32.69	3	Vertical	238	1.91	-	38.43	13.17	35.40

802.11a_Nss1,(6Mbps)_2TX

5180MHz_TnomVnom

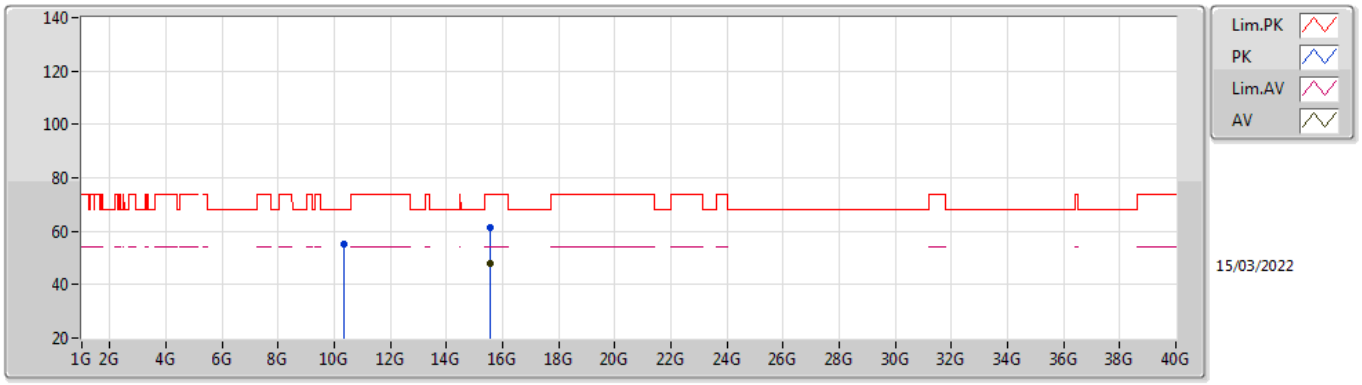


EUT Y_2TX
Setting 19
03-C-C-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.36252G	55.18	68.20	-13.02	42.05	3	Horizontal	88	2.64	-	38.16	10.55	35.58
PK	15.54756G	61.26	74.00	-12.74	45.13	3	Horizontal	141	1.80	-	38.37	13.17	35.41
AV	15.53864G	47.75	54.00	-6.25	31.55	3	Horizontal	141	1.80	-	38.43	13.17	35.40

802.11a_Nss1,(6Mbps)_2TX

5200MHz_TnomVnom

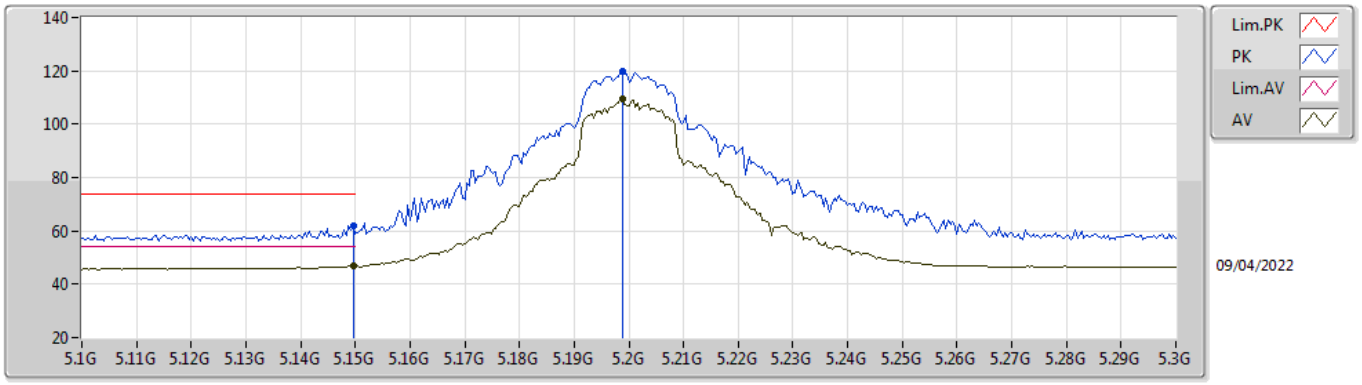


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1496G	62.12	74.00	-11.88	56.29	3	Vertical	357	1.80	-	34.00	7.17	35.34
AV	5.1496G	46.88	54.00	-7.12	41.05	3	Vertical	357	1.80	-	34.00	7.17	35.34
PK	5.1988G	119.66	Inf	-Inf	113.60	3	Vertical	357	1.80	-	34.20	7.20	35.34
AV	5.1988G	109.58	Inf	-Inf	103.52	3	Vertical	357	1.80	-	34.20	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5200MHz_TnomVnom

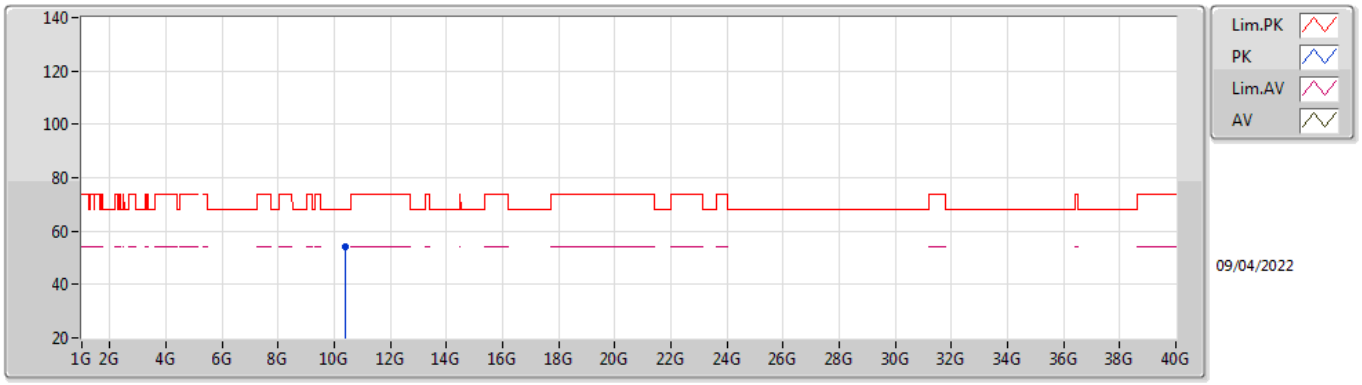


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.39524G	54.27	68.20	-13.93	41.06	3	Vertical	166	2.11	-	38.20	10.56	35.55

802.11a_Nss1,(6Mbps)_2TX

5200MHz_TnomVnom

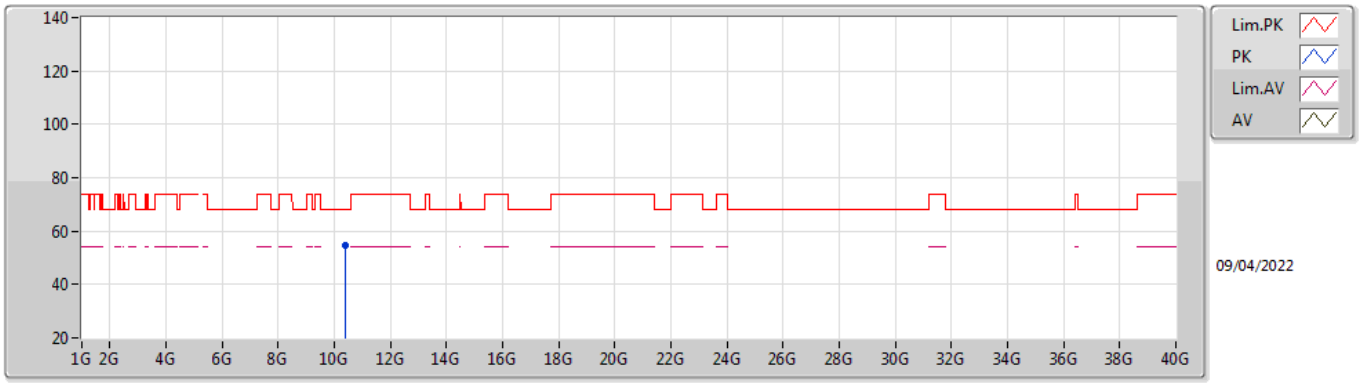


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.3952G	54.46	68.20	-13.74	41.25	3	Horizontal	146	1.89	-	38.20	10.56	35.55

802.11a_Nss1,(6Mbps)_2TX

5240MHz_TnomVnom

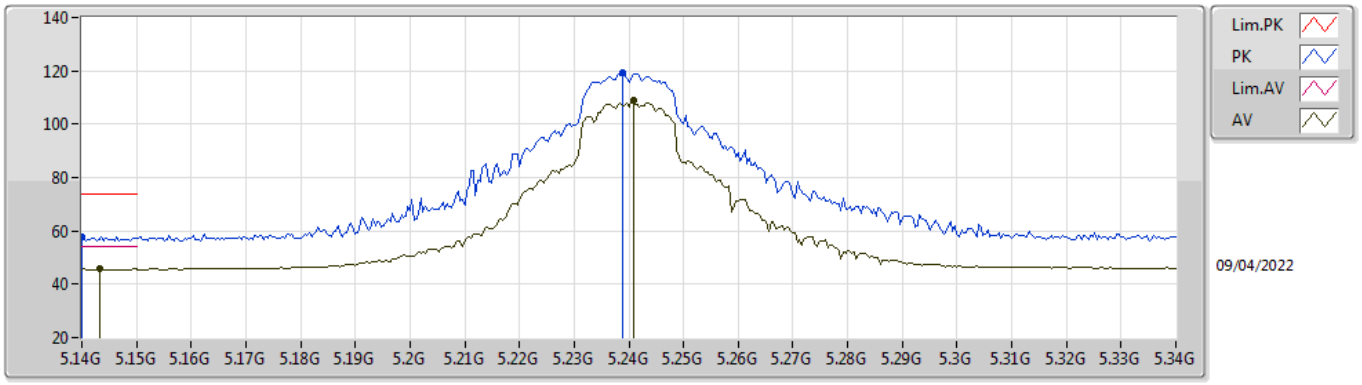


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.14G	57.97	74.00	-16.03	52.16	3	Vertical	357	1.80	-	33.98	7.17	35.34
AV	5.1432G	45.62	54.00	-8.38	39.80	3	Vertical	357	1.80	-	33.99	7.17	35.34
PK	5.2388G	119.13	Inf	-Inf	112.91	3	Vertical	357	1.80	-	34.36	7.20	35.34
AV	5.2408G	109.12	Inf	-Inf	102.90	3	Vertical	357	1.80	-	34.36	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5240MHz_TnomVnom

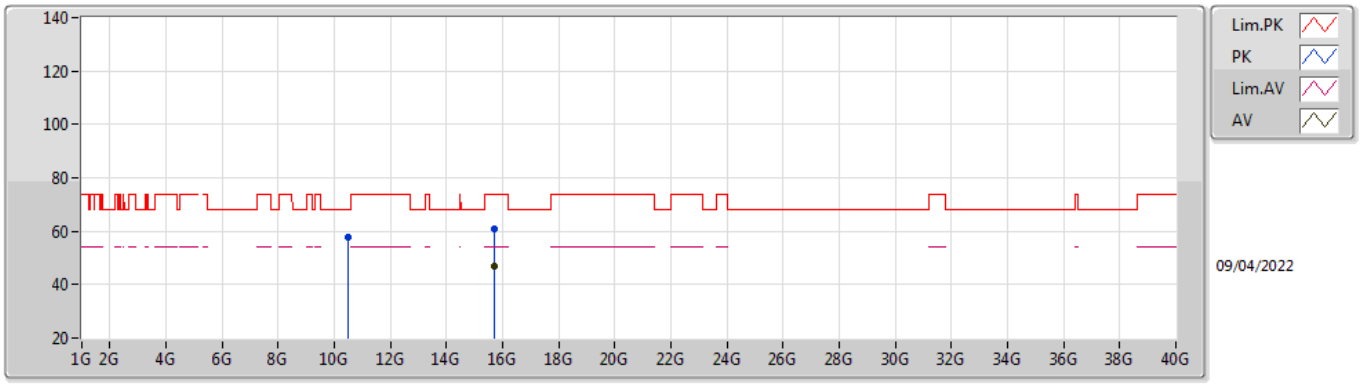


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.47696G	57.82	68.20	-10.38	44.54	3	Vertical	248	1.57	-	38.20	10.57	35.49
PK	15.71792G	61.02	74.00	-12.98	45.74	3	Vertical	176	1.80	-	37.57	13.26	35.55
AV	15.71992G	46.98	54.00	-7.02	31.69	3	Vertical	176	1.80	-	37.58	13.26	35.55

802.11a_Nss1,(6Mbps)_2TX

5240MHz_TnomVnom

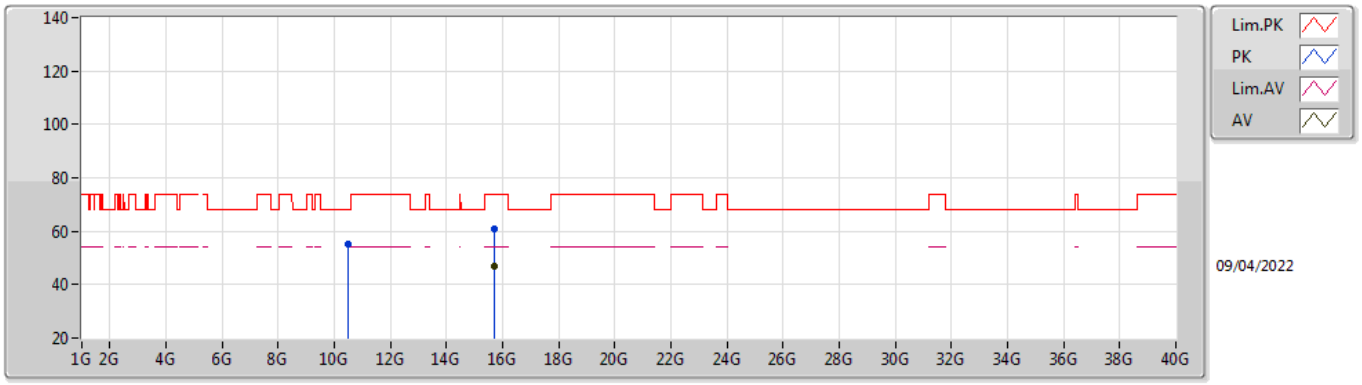


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.47952G	54.93	68.20	-13.27	41.65	3	Horizontal	349	1.38	-	38.20	10.57	35.49
PK	15.71344G	60.89	74.00	-13.11	45.63	3	Horizontal	144	1.80	-	37.55	13.26	35.55
AV	15.71956G	46.65	54.00	-7.35	31.36	3	Horizontal	144	1.80	-	37.58	13.26	35.55

802.11a_Nss1,(6Mbps)_2TX

5260MHz_TnomVnom

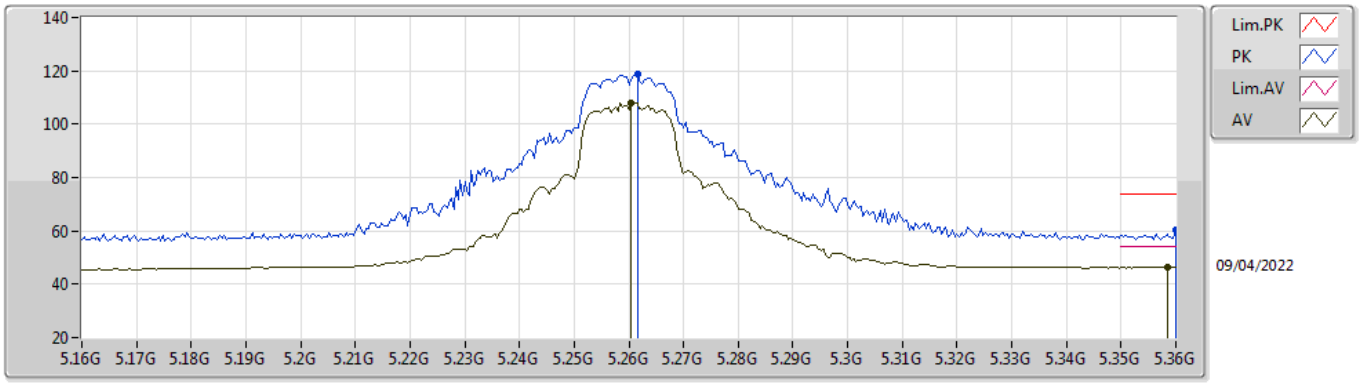


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2616G	119.04	Inf	-Inf	112.76	3	Vertical	357	1.80	-	34.42	7.20	35.34
AV	5.2604G	108.01	Inf	-Inf	101.73	3	Vertical	357	1.80	-	34.42	7.20	35.34
PK	5.36G	60.12	74.00	-13.88	53.74	3	Vertical	357	1.80	-	34.52	7.20	35.34
AV	5.3584G	46.49	54.00	-7.51	40.11	3	Vertical	357	1.80	-	34.52	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5260MHz_TnomVnom

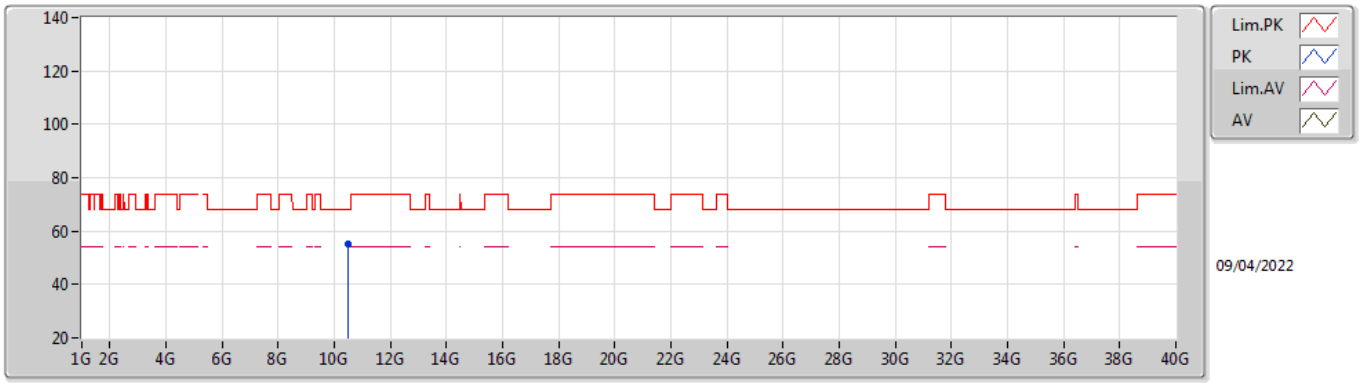


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.5134G	55.18	68.20	-13.02	41.86	3	Vertical	264	1.24	-	38.20	10.58	35.46

802.11a_Nss1,(6Mbps)_2TX

5260MHz_TnomVnom

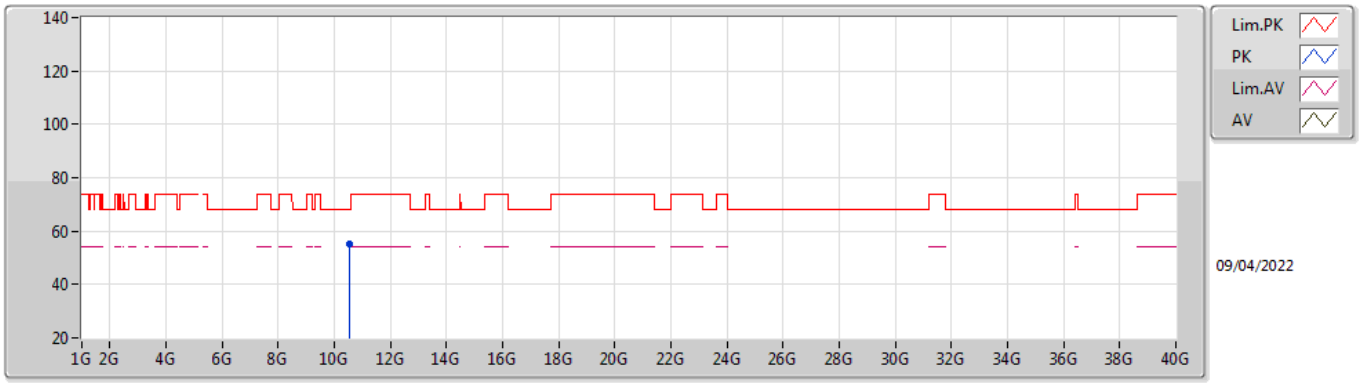


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.524G	55.01	68.20	-13.19	41.68	3	Horizontal	313	1.92	-	38.20	10.58	35.45

802.11a_Nss1,(6Mbps)_2TX

5300MHz_TnomVnom

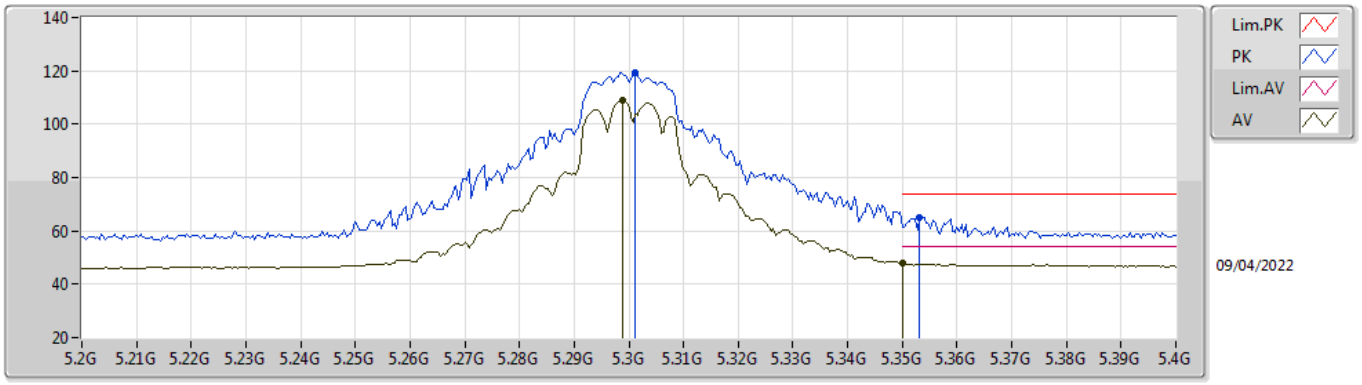


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3012G	119.12	Inf	-Inf	112.76	3	Vertical	356	1.80	-	34.50	7.20	35.34
AV	5.2988G	109.07	Inf	-Inf	102.71	3	Vertical	356	1.80	-	34.50	7.20	35.34
PK	5.3532G	64.82	74.00	-9.18	58.45	3	Vertical	356	1.80	-	34.51	7.20	35.34
AV	5.35G	47.76	54.00	-6.24	41.40	3	Vertical	356	1.80	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5300MHz_TnomVnom

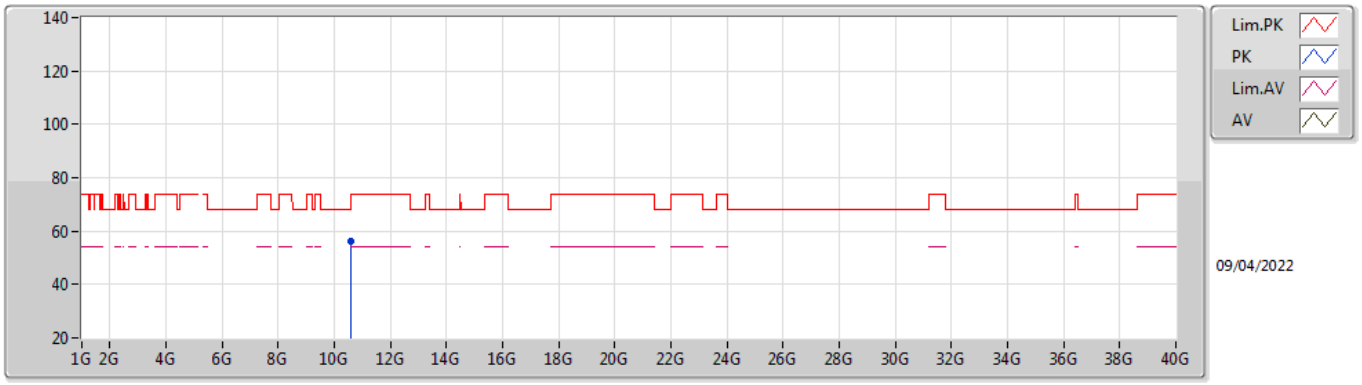


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.59816G	56.41	68.20	-11.79	43.01	3	Horizontal	137	1.80	-	38.20	10.59	35.39

802.11a_Nss1,(6Mbps)_2TX

5320MHz_TnomVnom

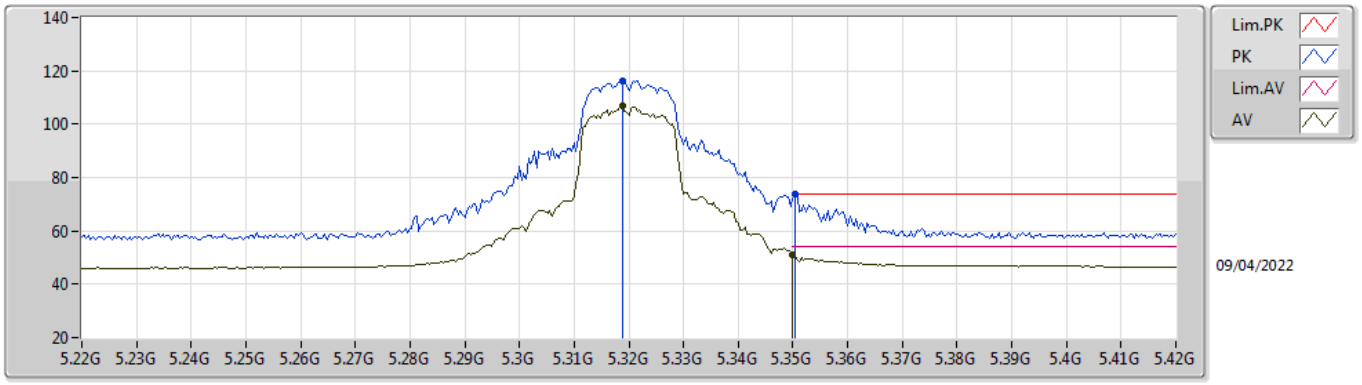


EUT Y_2TX
Setting 17.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3188G	116.46	Inf	-Inf	110.10	3	Vertical	348	1.80	-	34.50	7.20	35.34
AV	5.3188G	106.79	Inf	-Inf	100.43	3	Vertical	348	1.80	-	34.50	7.20	35.34
PK	5.3504G	73.59	74.00	-0.41	67.23	3	Vertical	348	1.80	-	34.50	7.20	35.34
AV	5.35G	51.10	54.00	-2.90	44.74	3	Vertical	348	1.80	-	34.50	7.20	35.34

802.11a_Nss1,(6Mbps)_2TX

5320MHz_TnomVnom

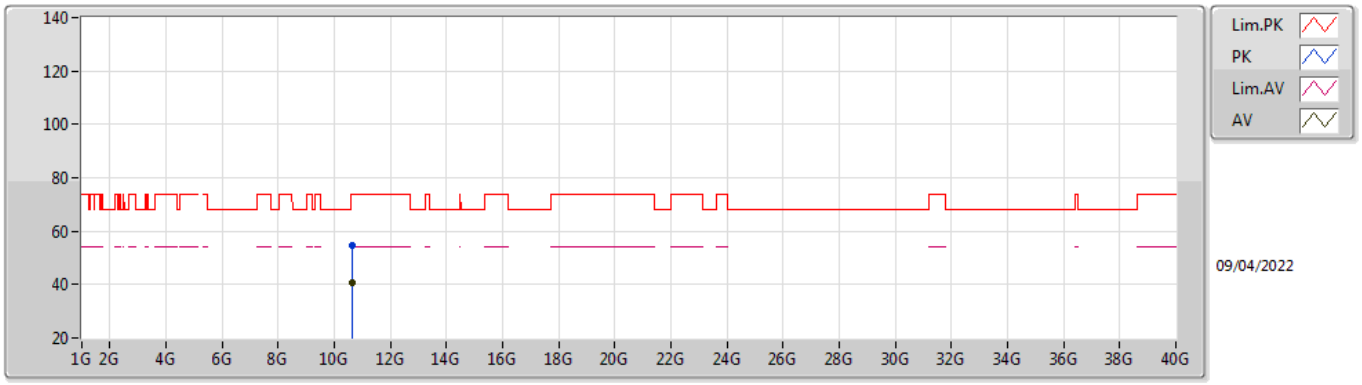


EUT Y_2TX
Setting 17.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.63968G	54.53	74.00	-19.47	41.00	3	Vertical	185	1.36	-	38.28	10.60	35.35
AV	10.64456G	40.54	54.00	-13.46	27.00	3	Vertical	185	1.36	-	38.29	10.60	35.35

802.11a_Nss1,(6Mbps)_2TX

5320MHz_TnomVnom

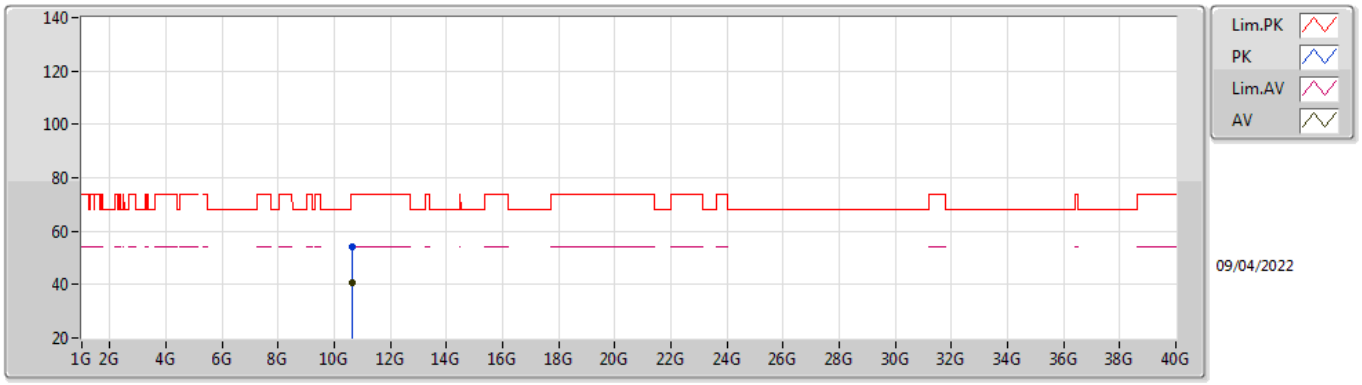


EUT Y_2TX
Setting 17.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.64624G	53.94	74.00	-20.06	40.39	3	Horizontal	113	2.32	-	38.29	10.60	35.34
AV	10.64984G	40.54	54.00	-13.46	26.98	3	Horizontal	113	2.32	-	38.30	10.60	35.34

802.11a_Nss1,(6Mbps)_2TX

5500MHz_TnomVnom

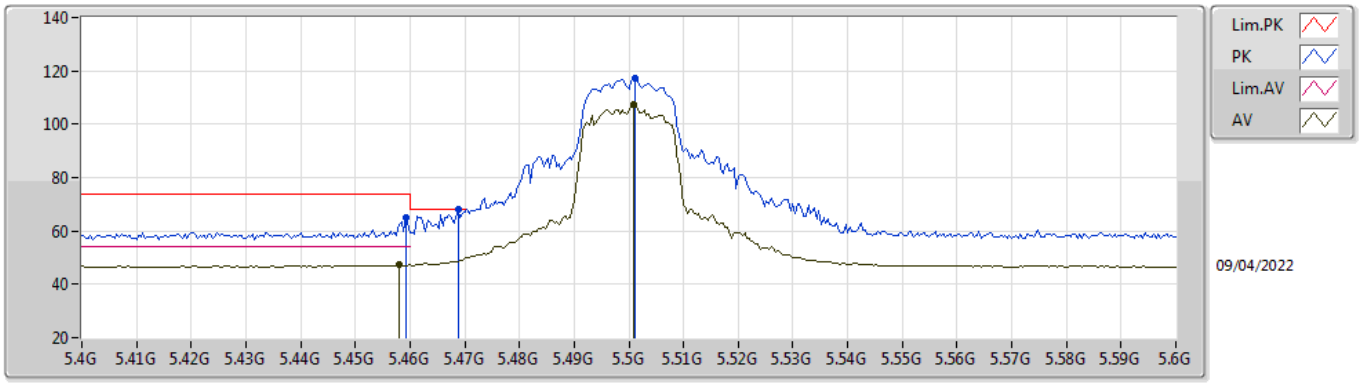


EUT Y_2TX
Setting 16.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4592G	64.96	74.00	-9.04	58.53	3	Vertical	358	1.89	-	34.52	7.26	35.35
AV	5.458G	47.18	54.00	-6.82	40.75	3	Vertical	358	1.89	-	34.52	7.26	35.35
PK	5.4688G	67.99	68.20	-0.21	61.53	3	Vertical	358	1.89	-	34.54	7.27	35.35
PK	5.5012G	117.34	Inf	-Inf	110.79	3	Vertical	358	1.89	-	34.60	7.30	35.35
AV	5.5008G	107.37	Inf	-Inf	100.82	3	Vertical	358	1.89	-	34.60	7.30	35.35

802.11a_Nss1,(6Mbps)_2TX

5500MHz_TnomVnom

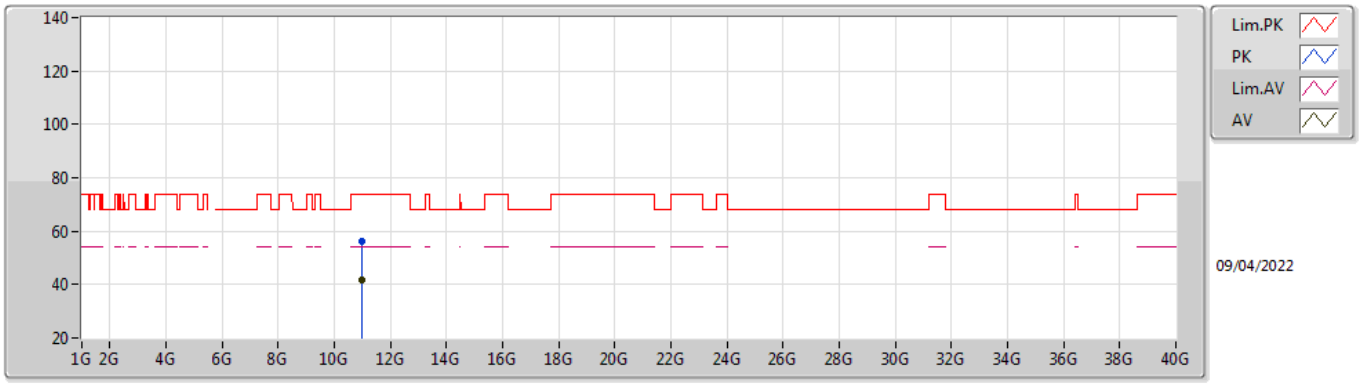


EUT Y_2TX
Setting 16.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.99988G	56.36	74.00	-17.64	42.35	3	Vertical	119	1.50	-	38.40	10.65	35.04
AV	11.00316G	41.67	54.00	-12.33	27.66	3	Vertical	119	1.50	-	38.40	10.65	35.04

802.11a_Nss1,(6Mbps)_2TX

5500MHz_TnomVnom

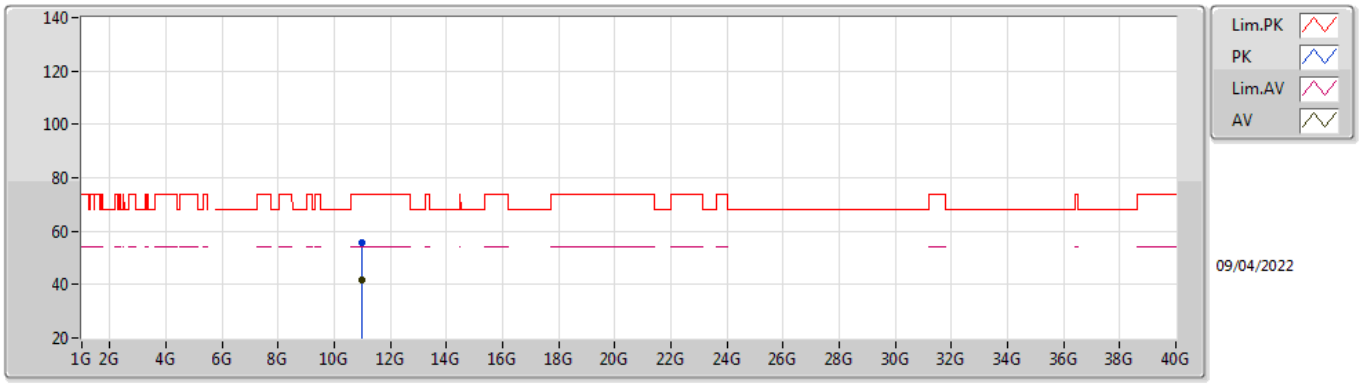


EUT Y_2TX
Setting 16.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.99678G	55.57	74.00	-18.43	41.56	3	Horizontal	278	2.26	-	38.40	10.65	35.04
AV	11.0024G	41.64	54.00	-12.36	27.63	3	Horizontal	278	2.26	-	38.40	10.65	35.04

802.11a_Nss1,(6Mbps)_2TX

5580MHz_TnomVnom

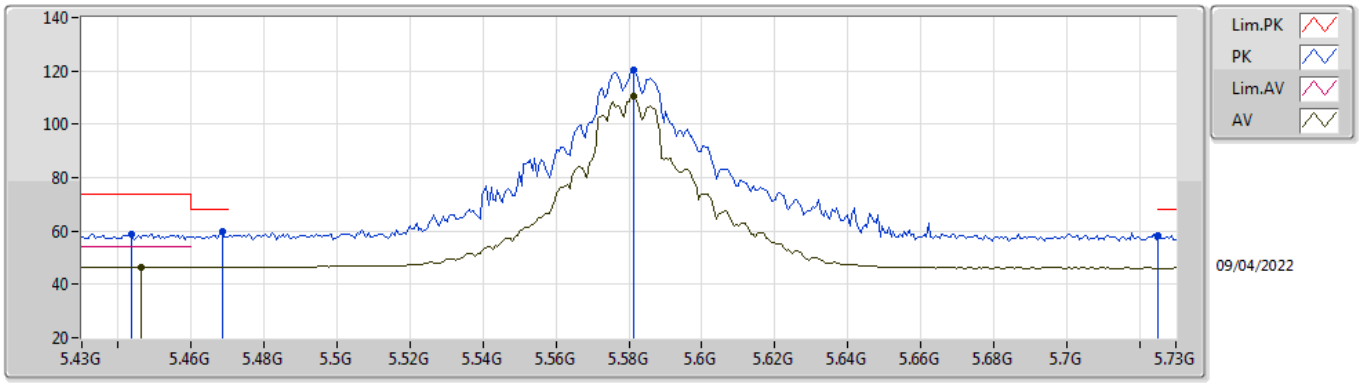


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4438G	58.94	74.00	-15.06	52.54	3	Vertical	-0	1.80	-	34.51	7.24	35.35
AV	5.4462G	46.62	54.00	-7.38	40.21	3	Vertical	-0	1.80	-	34.51	7.25	35.35
PK	5.4684G	59.86	68.20	-8.34	53.40	3	Vertical	-0	1.80	-	34.54	7.27	35.35
PK	5.5812G	120.39	Inf	-Inf	113.80	3	Vertical	-0	1.80	-	34.60	7.38	35.39
AV	5.5812G	110.43	Inf	-Inf	103.84	3	Vertical	-0	1.80	-	34.60	7.38	35.39
PK	5.7252G	58.12	68.20	-10.08	51.93	3	Vertical	-0	1.80	-	34.25	7.40	35.46

802.11a_Nss1,(6Mbps)_2TX

5580MHz_TnomVnom

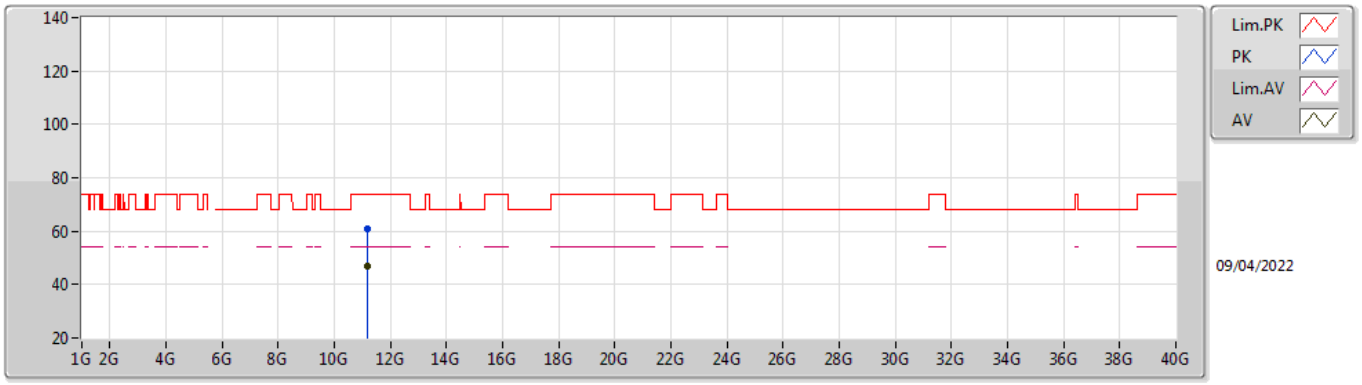


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1618G	60.78	74.00	-13.22	46.77	3	Vertical	189	2.05	-	38.56	10.67	35.22
AV	11.1616G	47.10	54.00	-6.90	33.09	3	Vertical	189	2.05	-	38.56	10.67	35.22

802.11a_Nss1,(6Mbps)_2TX

5580MHz_TnomVnom

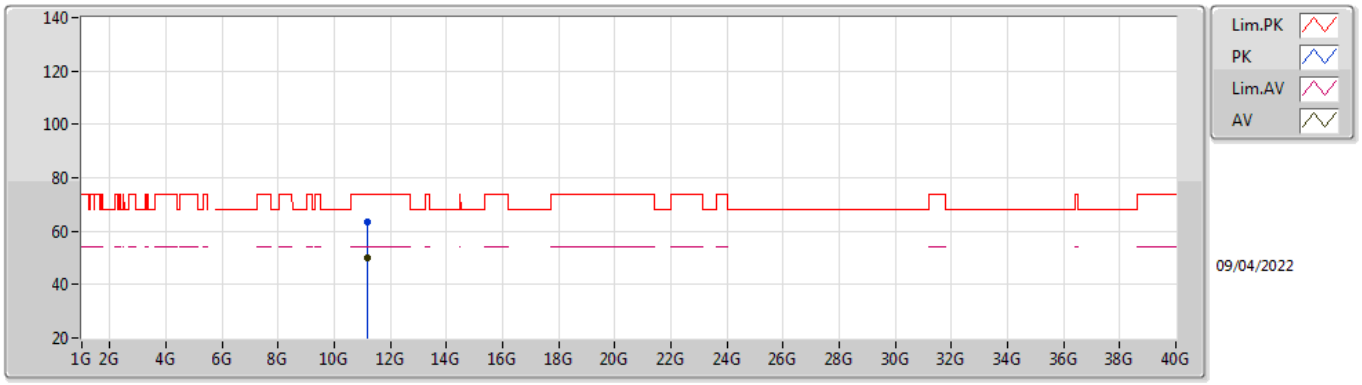


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1598G	63.61	74.00	-10.39	49.60	3	Horizontal	138	1.80	-	38.56	10.67	35.22
AV	11.15948G	50.07	54.00	-3.93	36.06	3	Horizontal	138	1.80	-	38.56	10.67	35.22

802.11a_Nss1,(6Mbps)_2TX

5700MHz_TnomVnom

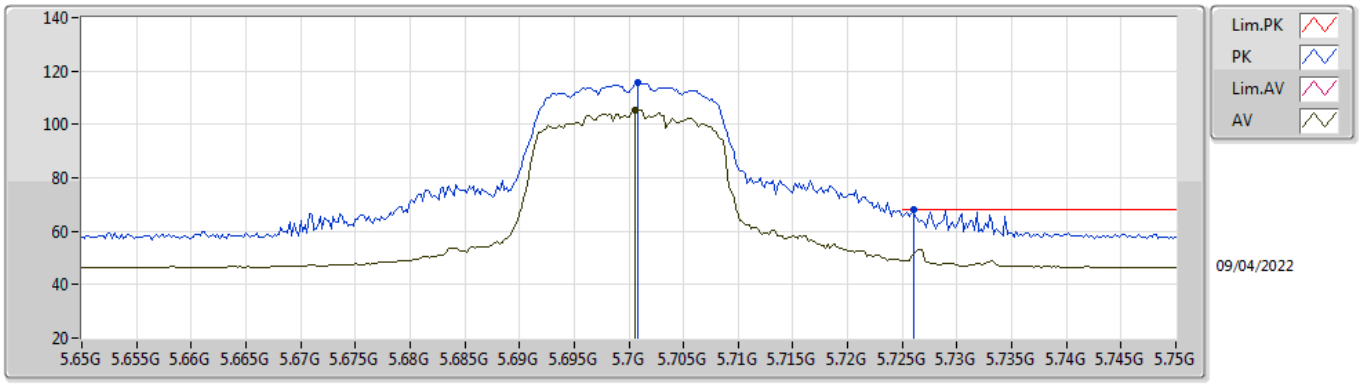


EUT Y_2TX
Setting 14.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7008G	115.45	Inf	-Inf	109.20	3	Vertical	358	1.80	-	34.30	7.40	35.45
AV	5.7006G	105.53	Inf	-Inf	99.28	3	Vertical	358	1.80	-	34.30	7.40	35.45
PK	5.726G	67.96	68.20	-0.24	61.77	3	Vertical	358	1.80	-	34.25	7.40	35.46

802.11a_Nss1,(6Mbps)_2TX

5700MHz_TnomVnom

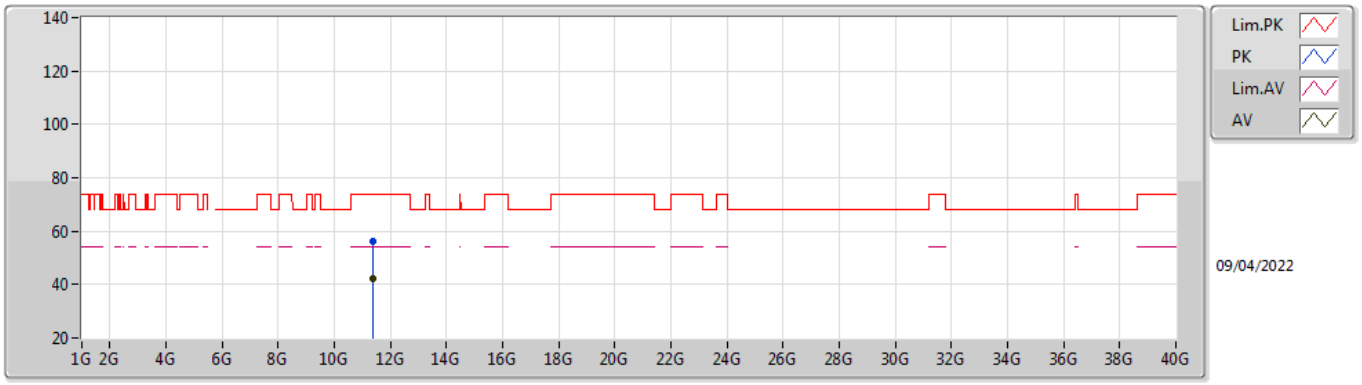


EUT Y_2TX
Setting 14.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.39536G	55.98	74.00	-18.02	41.95	3	Vertical	69	2.94	-	38.80	10.71	35.48
AV	11.39588G	42.20	54.00	-11.80	28.17	3	Vertical	69	2.94	-	38.80	10.71	35.48

802.11a_Nss1,(6Mbps)_2TX

5700MHz_TnomVnom

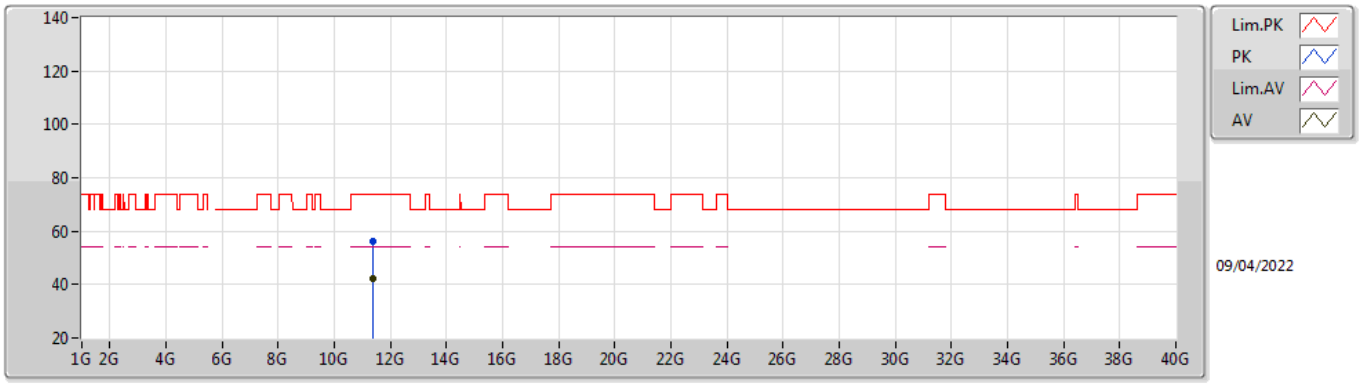


EUT Y_2TX
Setting 14.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.39564G	56.17	74.00	-17.83	42.14	3	Horizontal	120	2.96	-	38.80	10.71	35.48
AV	11.39508G	42.23	54.00	-11.77	28.20	3	Horizontal	120	2.96	-	38.80	10.71	35.48

802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

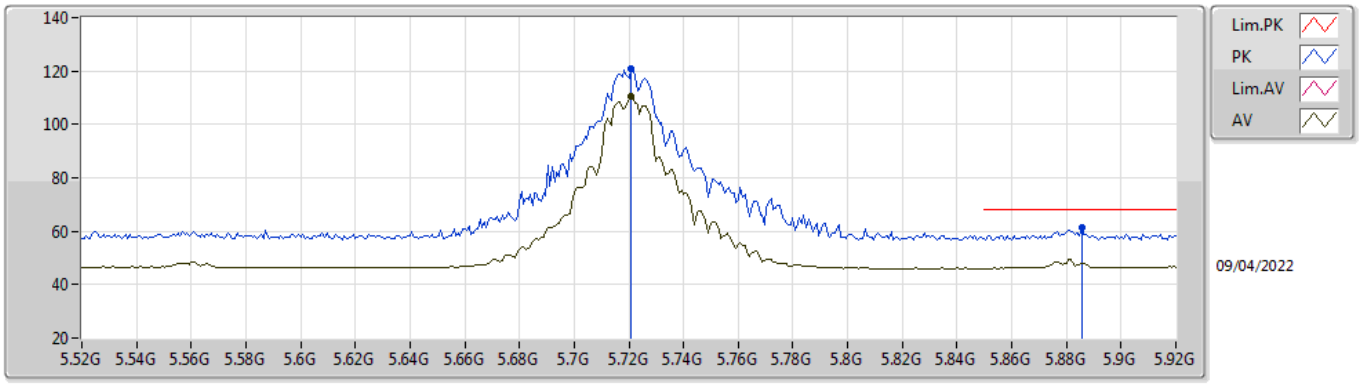


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7208G	120.78	Inf	-Inf	114.58	3	Vertical	360	1.80	-	34.26	7.40	35.46
AV	5.7208G	110.35	Inf	-Inf	104.15	3	Vertical	360	1.80	-	34.26	7.40	35.46
PK	5.8856G	61.36	68.20	-6.84	54.90	3	Vertical	358	1.80	-	34.51	7.49	35.54

802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

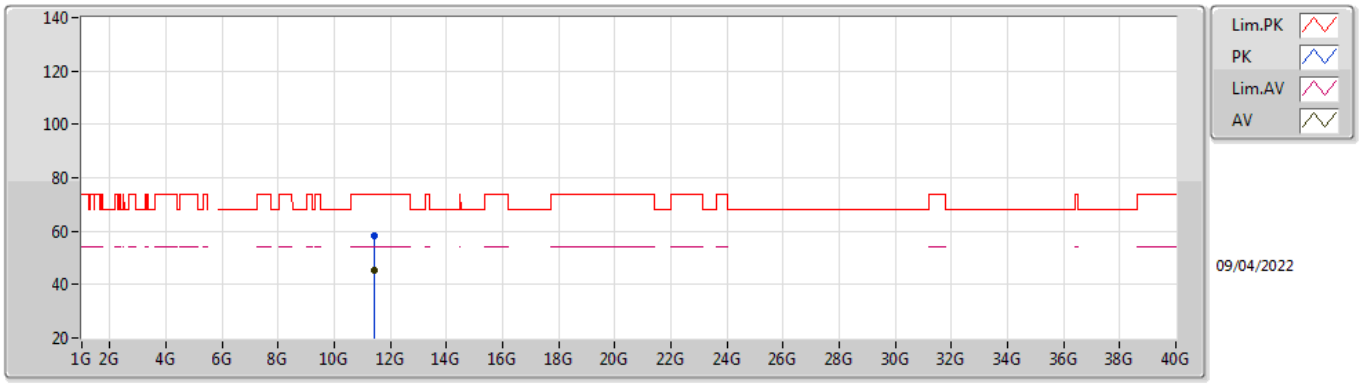


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.437G	58.07	74.00	-15.93	44.01	3	Vertical	246	2.95	-	38.87	10.72	35.53
AV	11.44148G	45.32	54.00	-8.68	31.25	3	Vertical	246	2.95	-	38.88	10.72	35.53

802.11a_Nss1,(6Mbps)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

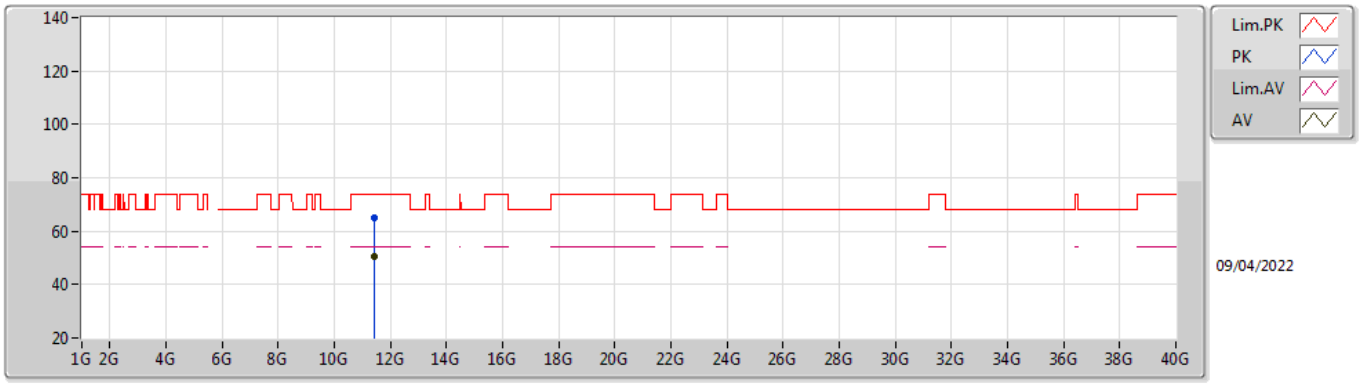


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4398G	65.04	74.00	-8.96	50.97	3	Horizontal	140	1.80	-	38.88	10.72	35.53
AV	11.43988G	50.77	54.00	-3.23	36.70	3	Horizontal	140	1.80	-	38.88	10.72	35.53

802.11a_Nss1,(6Mbps)_2TX

5745MHz_TnomVnom

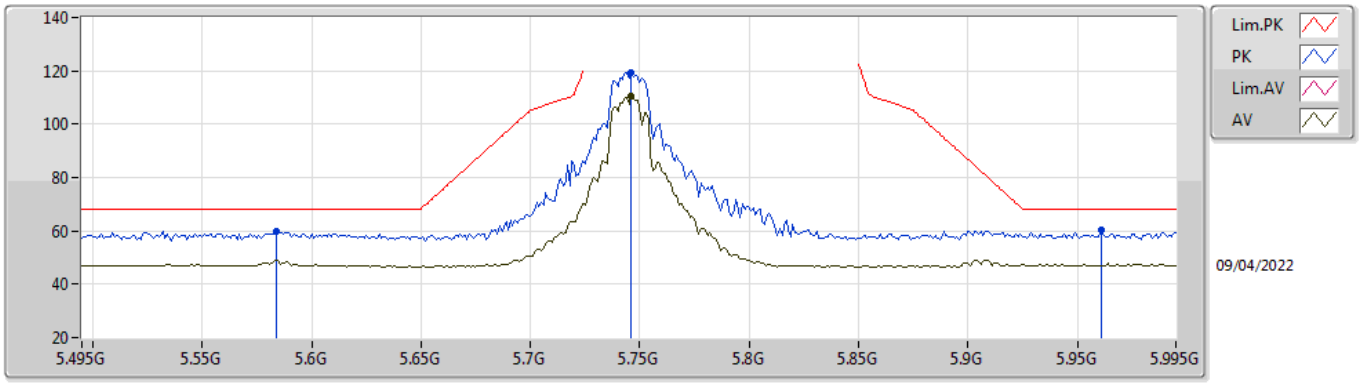


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.584G	59.90	68.20	-8.30	53.31	3	Vertical	358	1.80	-	34.60	7.38	35.39
PK	5.746G	119.55	Inf	-Inf	113.41	3	Vertical	358	1.80	-	34.21	7.40	35.47
AV	5.746G	110.40	Inf	-Inf	104.26	3	Vertical	358	1.80	-	34.21	7.40	35.47
PK	5.961G	60.30	68.20	-7.90	53.52	3	Vertical	358	1.80	-	34.80	7.56	35.58

802.11a_Nss1,(6Mbps)_2TX

5745MHz_TnomVnom

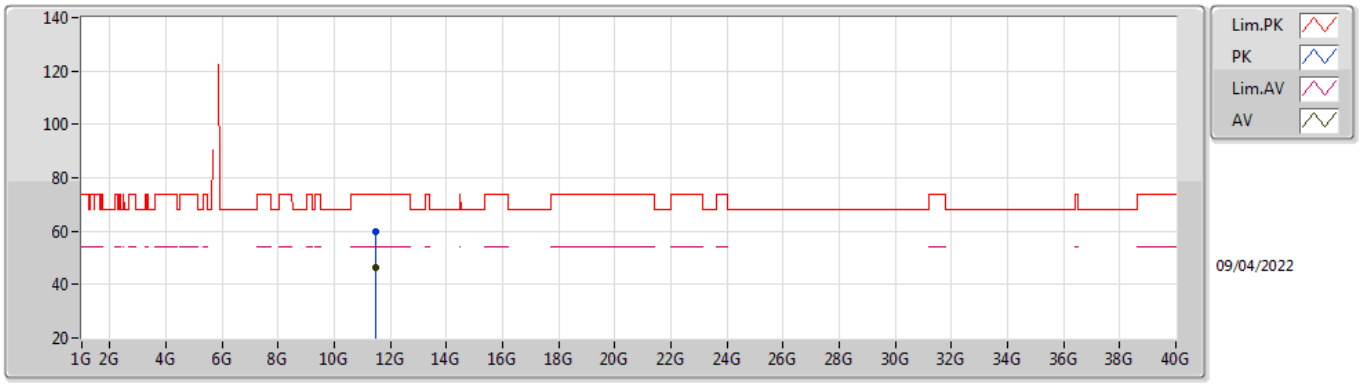


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.487G	59.65	74.00	-14.35	45.55	3	Vertical	196	1.80	-	38.97	10.72	35.59
AV	11.49164G	46.52	54.00	-7.48	32.41	3	Vertical	196	1.80	-	38.98	10.72	35.59

802.11a_Nss1,(6Mbps)_2TX

5745MHz_TnomVnom

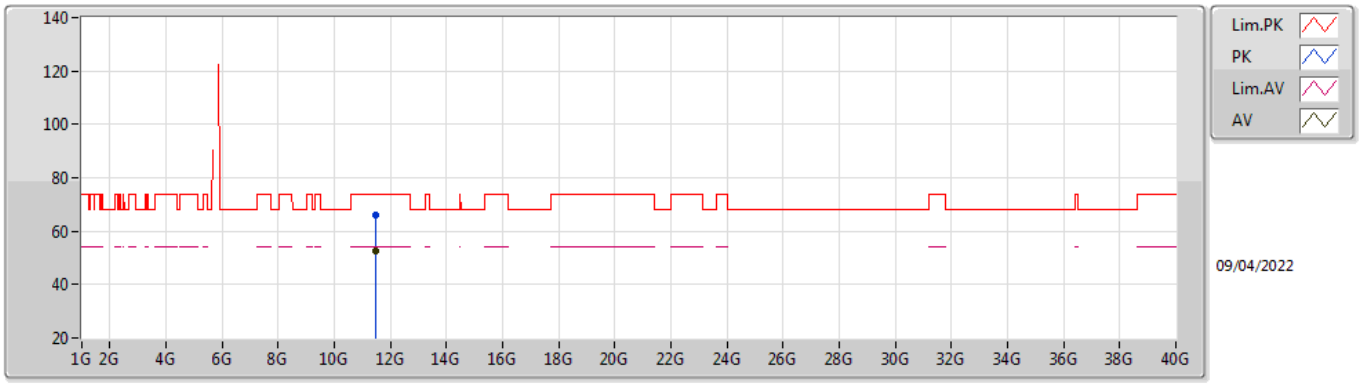


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.48972G	66.07	74.00	-7.93	51.96	3	Horizontal	134	1.79	-	38.98	10.72	35.59
AV	11.48992G	52.70	54.00	-1.30	38.59	3	Horizontal	134	1.79	-	38.98	10.72	35.59

802.11a_Nss1,(6Mbps)_2TX

5785MHz_TnomVnom

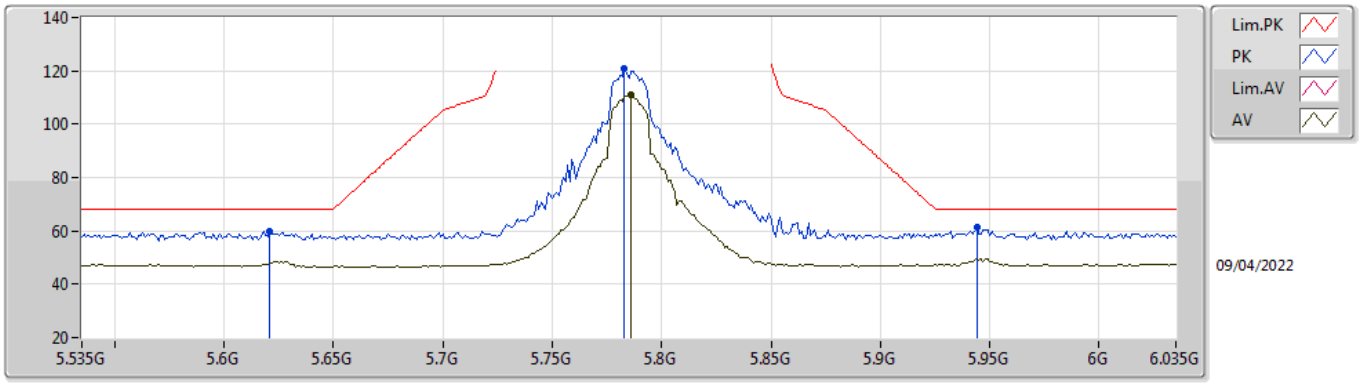


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.621G	59.93	68.20	-8.27	53.38	3	Vertical	360	1.80	-	34.56	7.40	35.41
PK	5.783G	120.64	Inf	-Inf	114.53	3	Vertical	360	1.80	-	34.20	7.40	35.49
AV	5.786G	110.93	Inf	-Inf	104.82	3	Vertical	360	1.80	-	34.20	7.40	35.49
PK	5.944G	61.58	68.20	-6.62	54.83	3	Vertical	360	1.80	-	34.78	7.54	35.57

802.11a_Nss1,(6Mbps)_2TX

5785MHz_TnomVnom

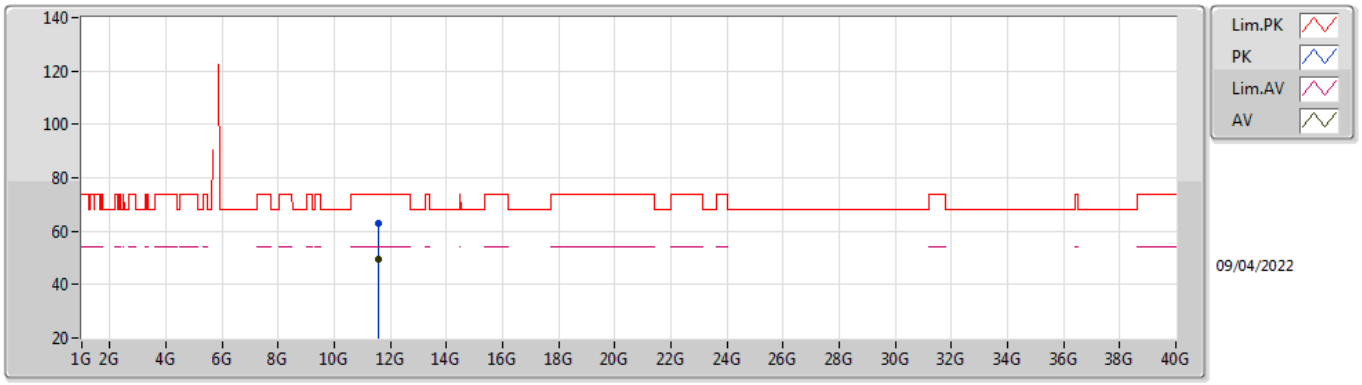


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.57108G	62.70	74.00	-11.30	48.26	3	Vertical	175	2.48	-	39.28	10.74	35.58
AV	11.57124G	49.49	54.00	-4.51	35.05	3	Vertical	175	2.48	-	39.28	10.74	35.58

802.11a_Nss1,(6Mbps)_2TX

5785MHz_TnomVnom

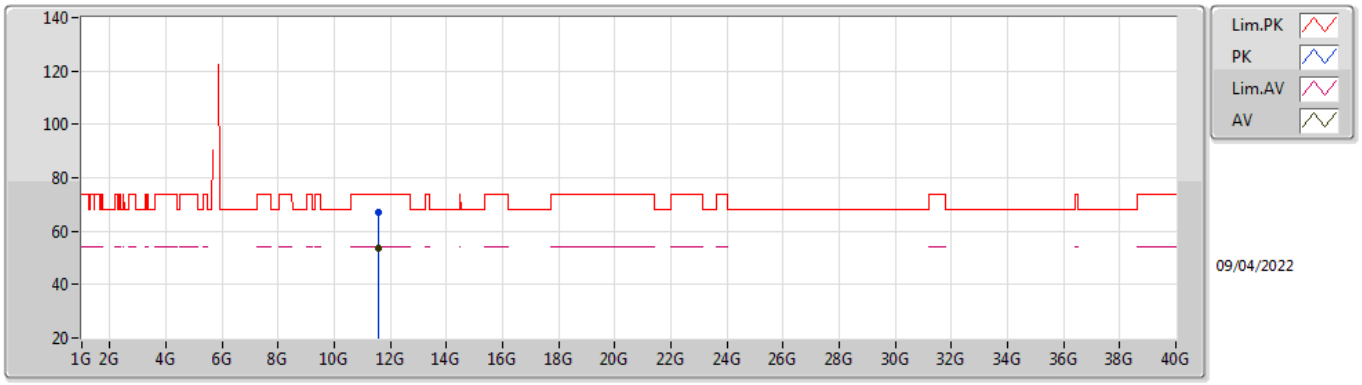


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5698G	66.99	74.00	-7.01	52.55	3	Horizontal	136	1.78	-	39.28	10.74	35.58
AV	11.57016G	53.43	54.00	-0.57	38.99	3	Horizontal	136	1.78	-	39.28	10.74	35.58

802.11a_Nss1,(6Mbps)_2TX

5825MHz_TnomVnom

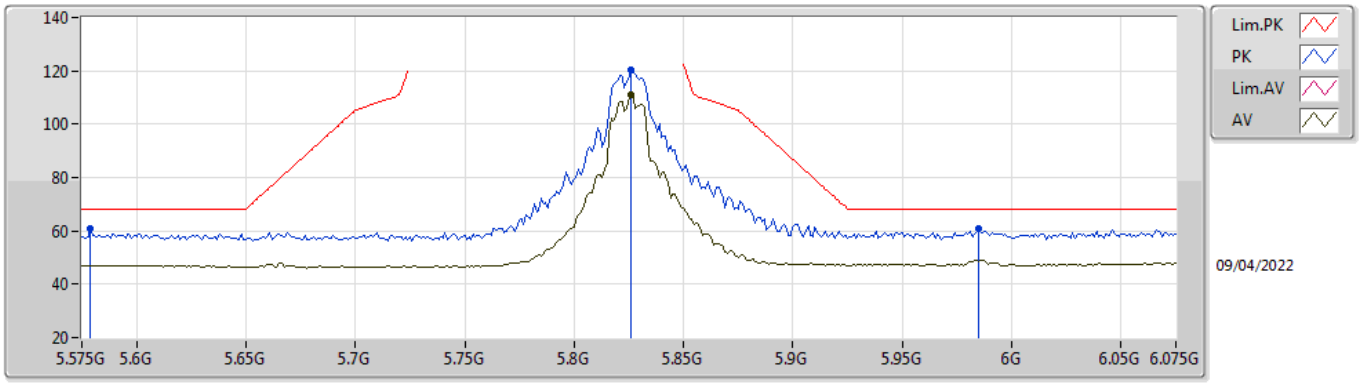


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.579G	61.01	68.20	-7.19	54.42	3	Vertical	360	1.80	-	34.60	7.38	35.39
PK	5.826G	120.27	Inf	-Inf	114.10	3	Vertical	360	1.80	-	34.25	7.43	35.51
AV	5.826G	111.21	Inf	-Inf	105.04	3	Vertical	360	1.80	-	34.25	7.43	35.51
PK	5.985G	60.85	68.20	-7.35	54.06	3	Vertical	360	1.80	-	34.80	7.58	35.59

802.11a_Nss1,(6Mbps)_2TX

5825MHz_TnomVnom

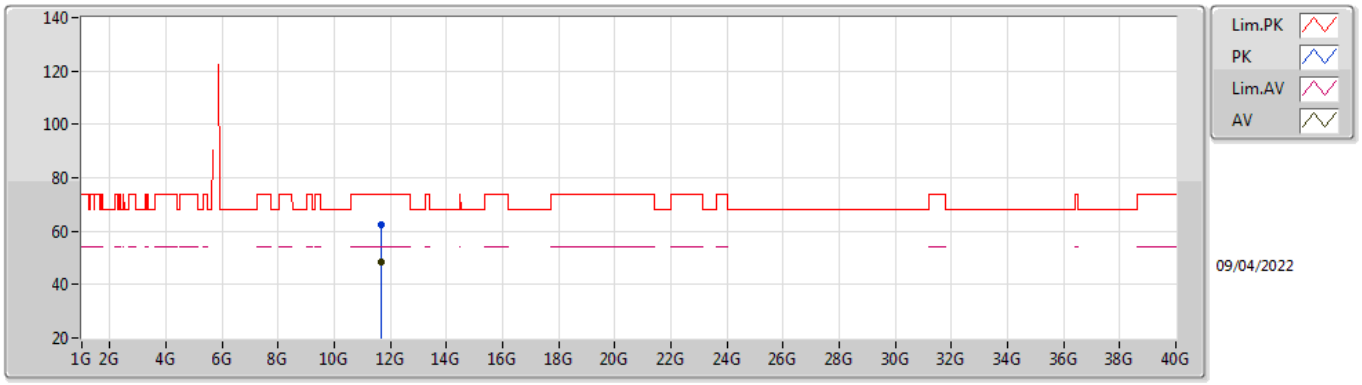


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65104G	62.33	74.00	-11.67	47.75	3	Vertical	176	2.48	-	39.40	10.75	35.57
AV	11.65128G	48.55	54.00	-5.45	33.97	3	Vertical	176	2.48	-	39.40	10.75	35.57

802.11a_Nss1,(6Mbps)_2TX

5825MHz_TnomVnom

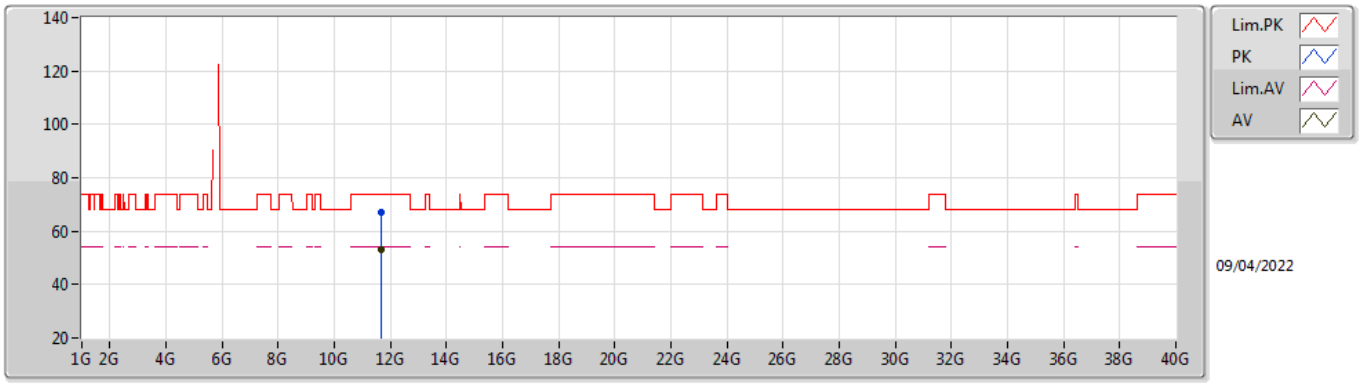


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.64984G	67.09	74.00	-6.91	52.51	3	Horizontal	138	1.77	-	39.40	10.75	35.57
AV	11.65004G	52.89	54.00	-1.11	38.31	3	Horizontal	138	1.77	-	39.40	10.75	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

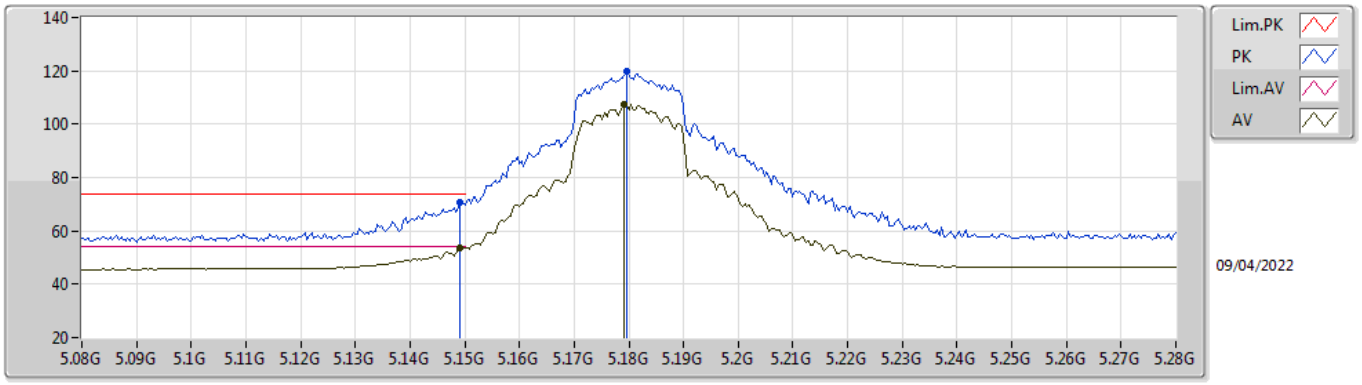


EUT Y_2TX
Setting 20.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1492G	70.56	74.00	-3.44	64.73	3	Vertical	352	1.80	-	34.00	7.17	35.34
AV	5.1492G	53.84	54.00	-0.16	48.01	3	Vertical	352	1.80	-	34.00	7.17	35.34
PK	5.1796G	119.85	Inf	-Inf	113.88	3	Vertical	352	1.80	-	34.12	7.19	35.34
AV	5.1792G	107.38	Inf	-Inf	101.41	3	Vertical	352	1.80	-	34.12	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

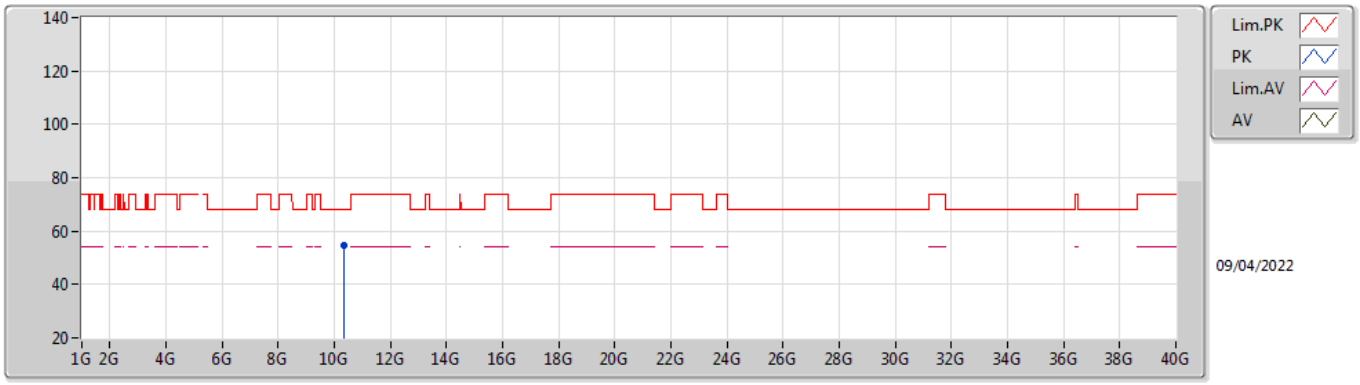


EUT Y_2TX
Setting 20.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.36136G	54.43	68.20	-13.77	41.30	3	Vertical	257	1.64	-	38.16	10.55	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

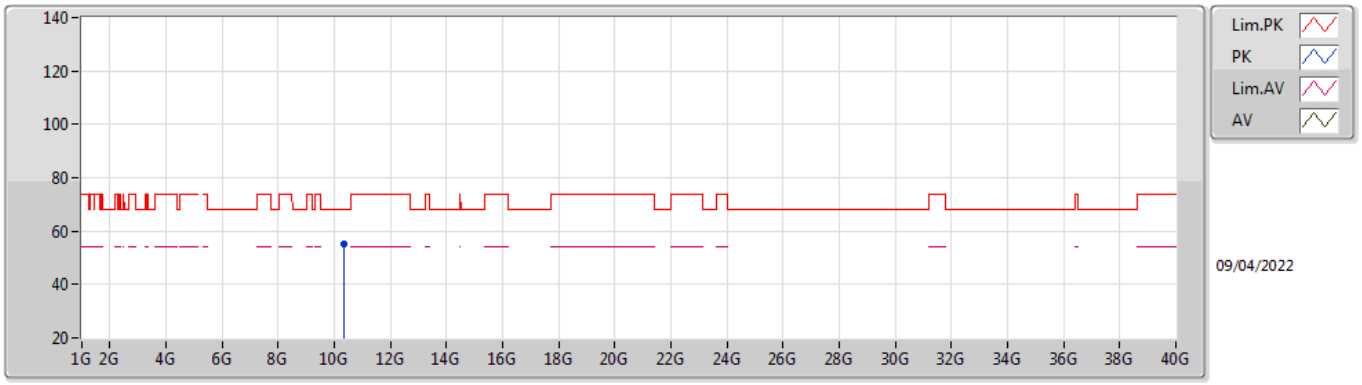


EUT Y_2TX
Setting 20.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.3575G	55.03	68.20	-13.17	41.90	3	Horizontal	61	1.26	-	38.16	10.55	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

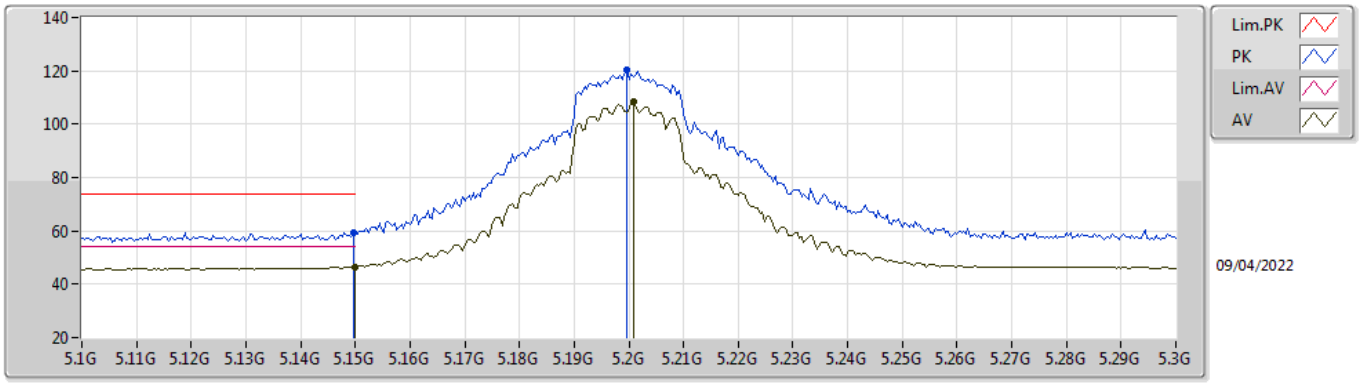


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1496G	59.48	74.00	-14.52	53.65	3	Vertical	357	1.80	-	34.00	7.17	35.34
AV	5.15G	46.52	54.00	-7.48	40.69	3	Vertical	357	1.80	-	34.00	7.17	35.34
PK	5.1996G	120.35	Inf	-Inf	114.29	3	Vertical	357	1.80	-	34.20	7.20	35.34
AV	5.2008G	108.39	Inf	-Inf	102.33	3	Vertical	357	1.80	-	34.20	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

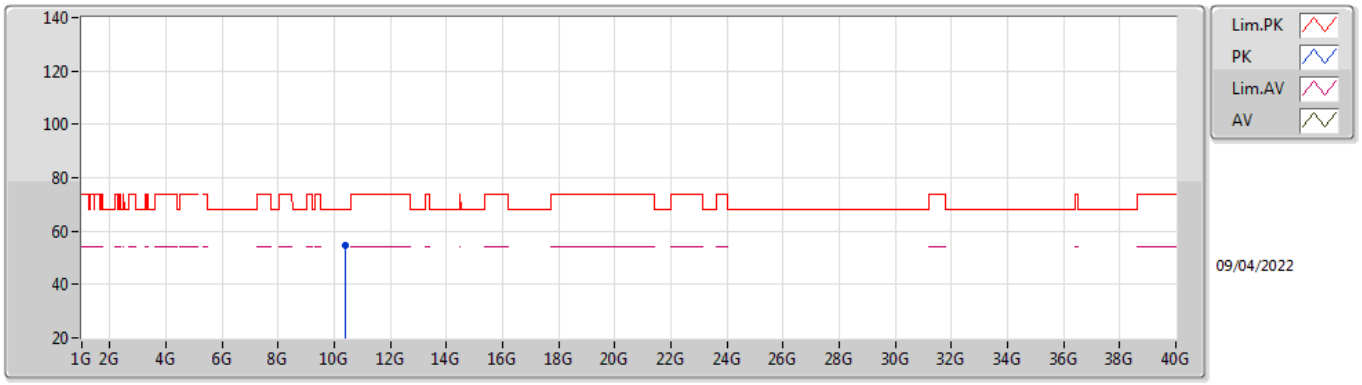


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.39874G	54.72	68.20	-13.48	41.51	3	Vertical	218	2.04	-	38.20	10.56	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

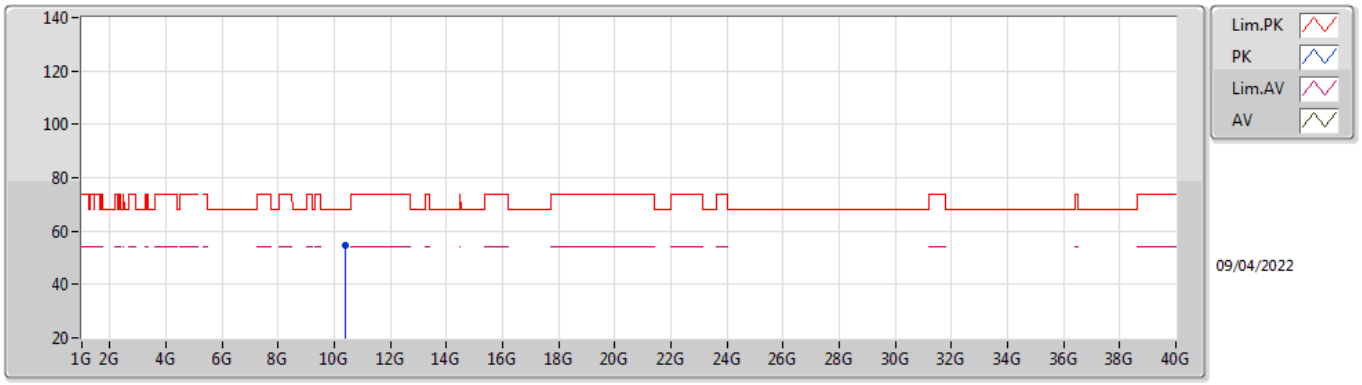


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.39826G	54.58	68.20	-13.62	41.37	3	Horizontal	281	1.09	-	38.20	10.56	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

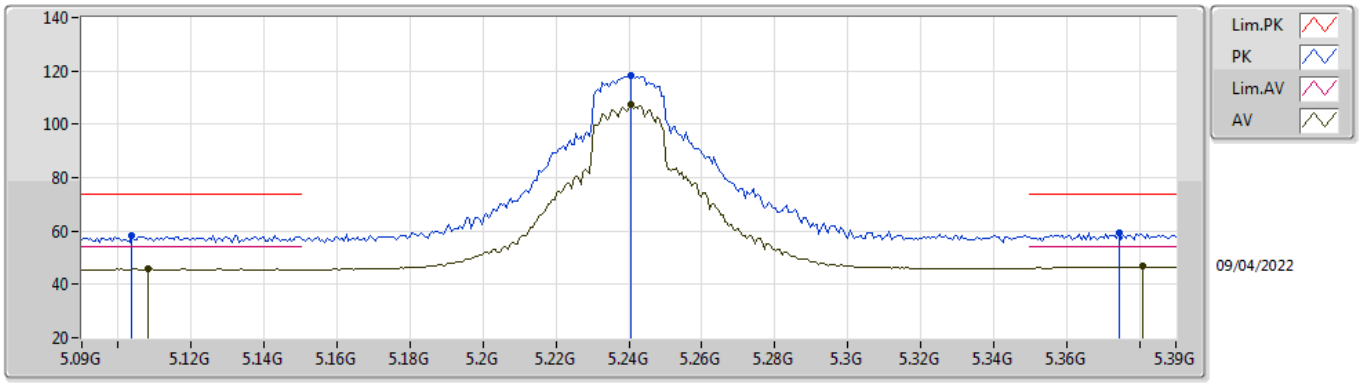


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1038G	58.27	74.00	-15.73	52.54	3	Vertical	357	1.80	-	33.91	7.15	35.33
AV	5.108G	45.69	54.00	-8.31	39.95	3	Vertical	357	1.80	-	33.92	7.15	35.33
PK	5.2406G	118.14	Inf	-Inf	111.92	3	Vertical	357	1.80	-	34.36	7.20	35.34
AV	5.2406G	107.27	Inf	-Inf	101.05	3	Vertical	357	1.80	-	34.36	7.20	35.34
PK	5.3744G	59.31	74.00	-14.69	52.90	3	Vertical	357	1.80	-	34.55	7.20	35.34
AV	5.381G	46.65	54.00	-7.35	40.24	3	Vertical	357	1.80	-	34.56	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

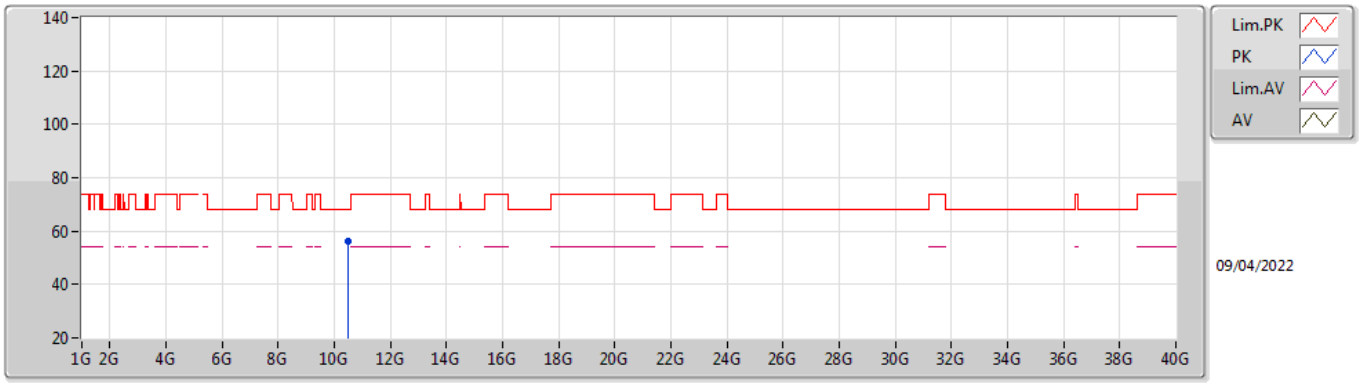


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.48008G	56.33	68.20	-11.87	43.05	3	Vertical	252	1.77	-	38.20	10.57	35.49

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

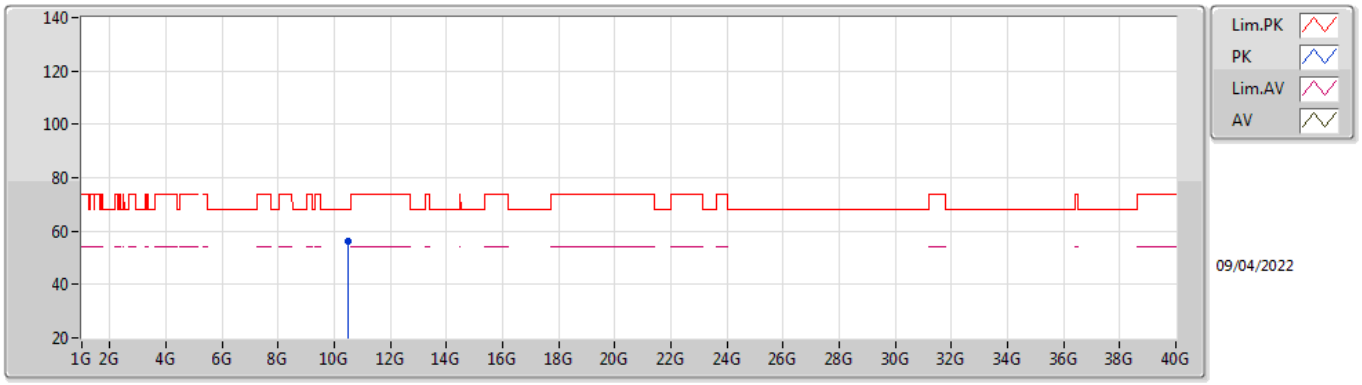


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.47988G	56.05	68.20	-12.15	42.77	3	Horizontal	118	2.06	-	38.20	10.57	35.49

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

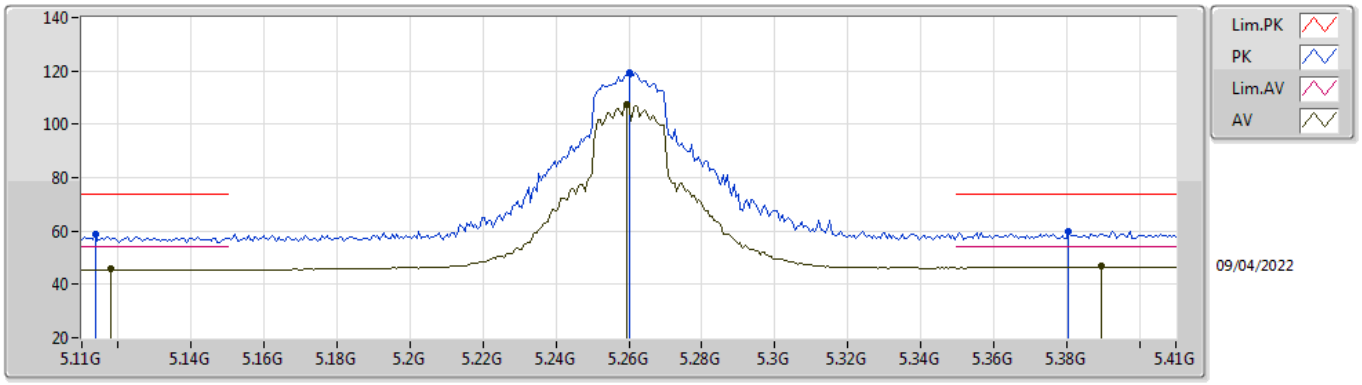


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1136G	58.60	74.00	-15.40	52.84	3	Vertical	358	1.87	-	33.93	7.16	35.33
AV	5.1178G	45.64	54.00	-8.36	39.87	3	Vertical	358	1.87	-	33.94	7.16	35.33
PK	5.26G	119.33	Inf	-Inf	113.05	3	Vertical	358	1.87	-	34.42	7.20	35.34
AV	5.2594G	107.39	Inf	-Inf	101.11	3	Vertical	358	1.87	-	34.42	7.20	35.34
PK	5.3806G	59.77	74.00	-14.23	53.36	3	Vertical	358	1.87	-	34.56	7.20	35.35
AV	5.3896G	46.64	54.00	-7.36	40.21	3	Vertical	358	1.87	-	34.58	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

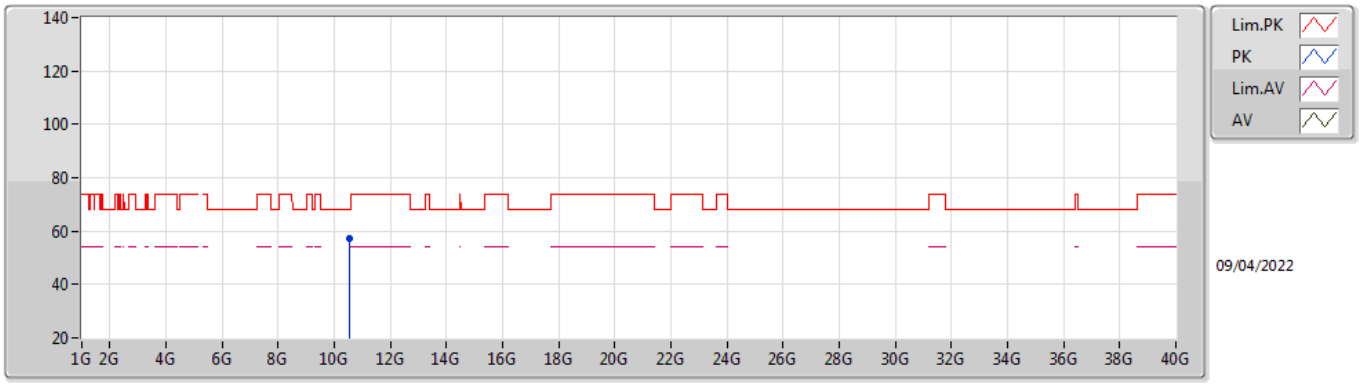


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.52368G	57.41	68.20	-10.79	44.08	3	Vertical	248	1.43	-	38.20	10.58	35.45

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

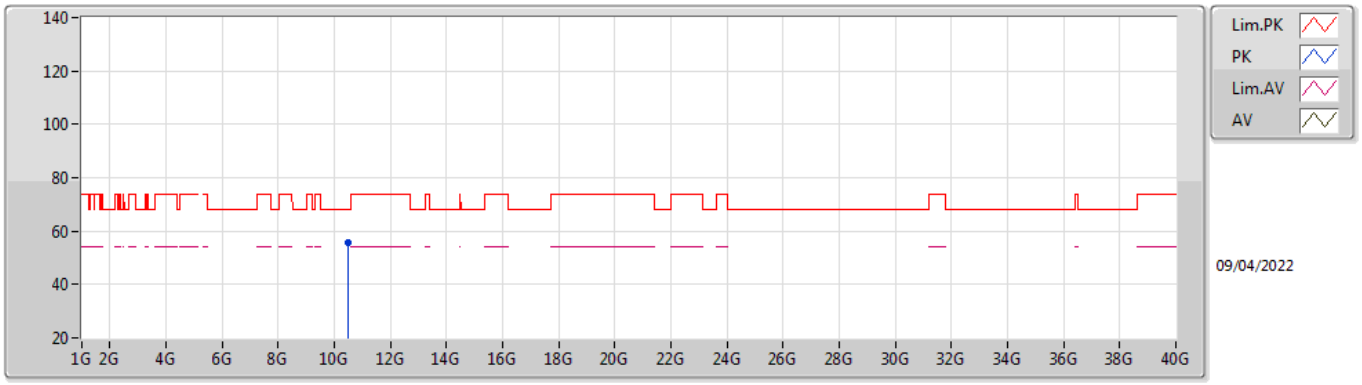


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.51388G	55.50	68.20	-12.70	42.18	3	Horizontal	123	1.80	-	38.20	10.58	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

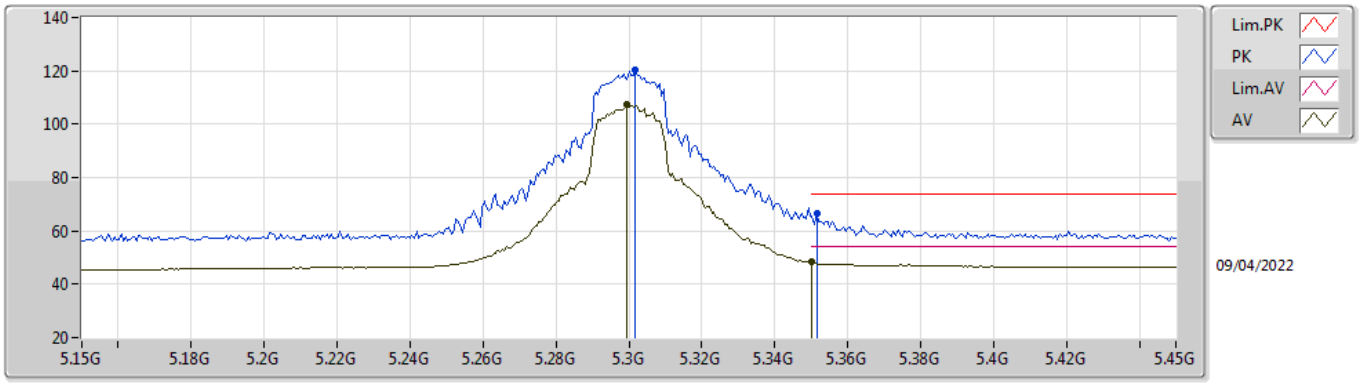


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3018G	120.11	Inf	-Inf	113.75	3	Vertical	355	1.80	-	34.50	7.20	35.34
AV	5.2994G	107.66	Inf	-Inf	101.30	3	Vertical	355	1.80	-	34.50	7.20	35.34
PK	5.3516G	66.41	74.00	-7.59	60.05	3	Vertical	355	1.80	-	34.50	7.20	35.34
AV	5.35G	48.20	54.00	-5.80	41.84	3	Vertical	355	1.80	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

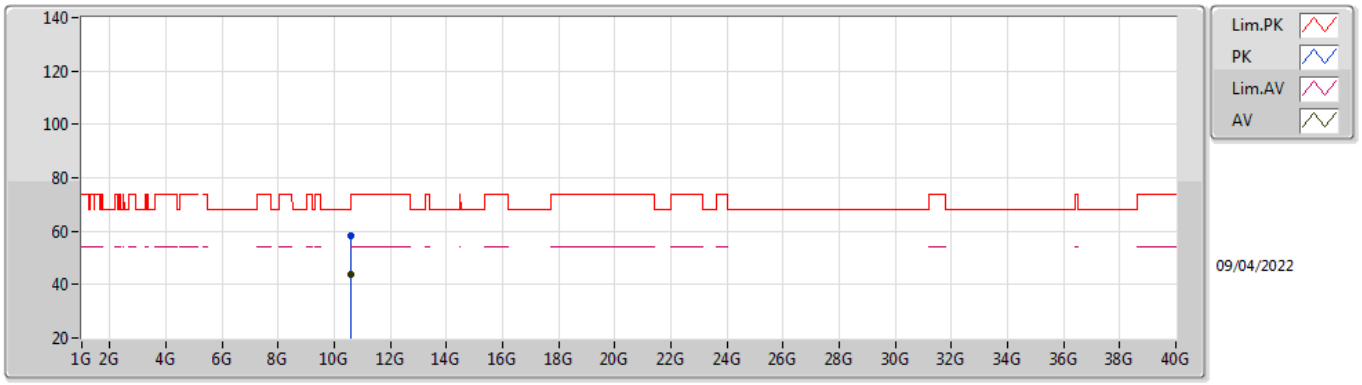


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6036G	58.53	74.00	-15.47	45.11	3	Vertical	250	1.48	-	38.21	10.59	35.38
AV	10.6012G	44.03	54.00	-9.97	30.62	3	Vertical	250	1.48	-	38.20	10.59	35.38

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

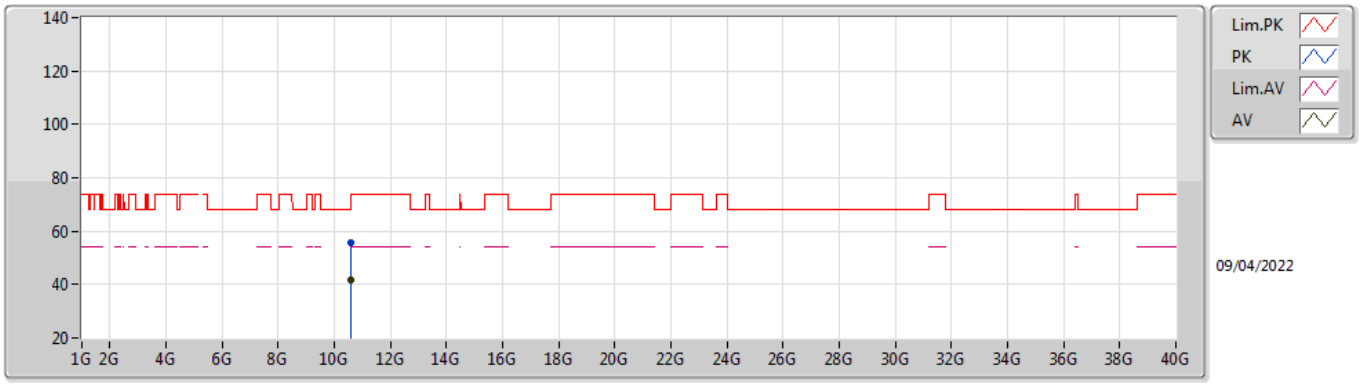


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60808G	55.72	74.00	-18.28	42.29	3	Horizontal	295	1.18	-	38.22	10.59	35.38
AV	10.60428G	41.78	54.00	-12.22	28.36	3	Horizontal	295	1.18	-	38.21	10.59	35.38

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

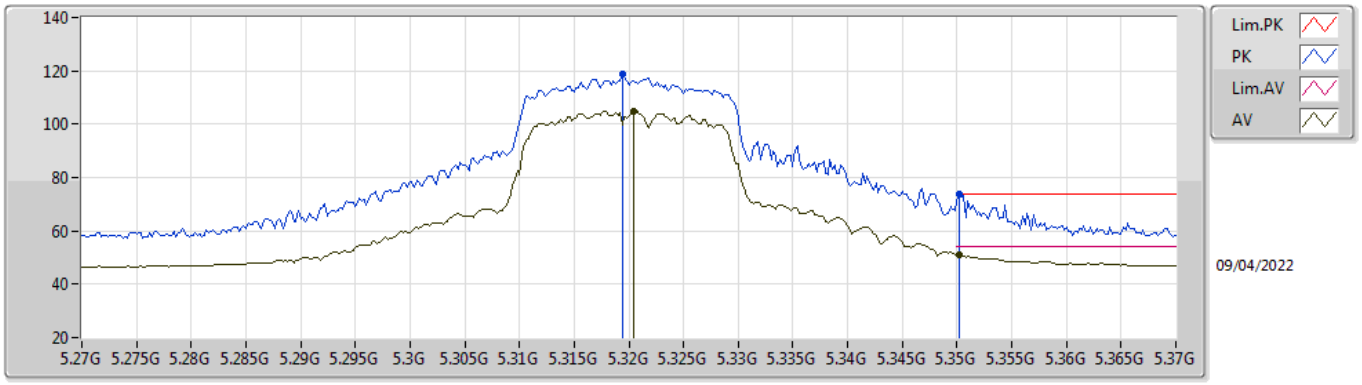


EUT Y_2TX
Setting 17
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3194G	118.68	Inf	-Inf	112.32	3	Vertical	360	1.90	-	34.50	7.20	35.34
AV	5.3204G	104.99	Inf	-Inf	98.63	3	Vertical	360	1.90	-	34.50	7.20	35.34
PK	5.3502G	73.82	74.00	-0.18	67.46	3	Vertical	360	1.90	-	34.50	7.20	35.34
AV	5.3502G	50.84	54.00	-3.16	44.48	3	Vertical	360	1.90	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

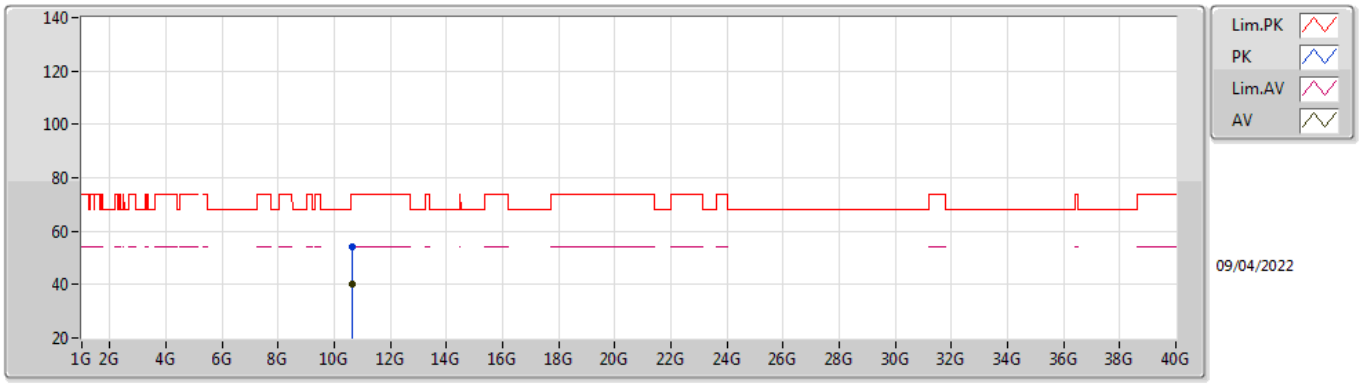


EUT Y_2TX
Setting 17
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.63742G	54.03	74.00	-19.97	40.51	3	Vertical	207	2.69	-	38.27	10.60	35.35
AV	10.64274G	40.43	54.00	-13.57	26.89	3	Vertical	207	2.69	-	38.29	10.60	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

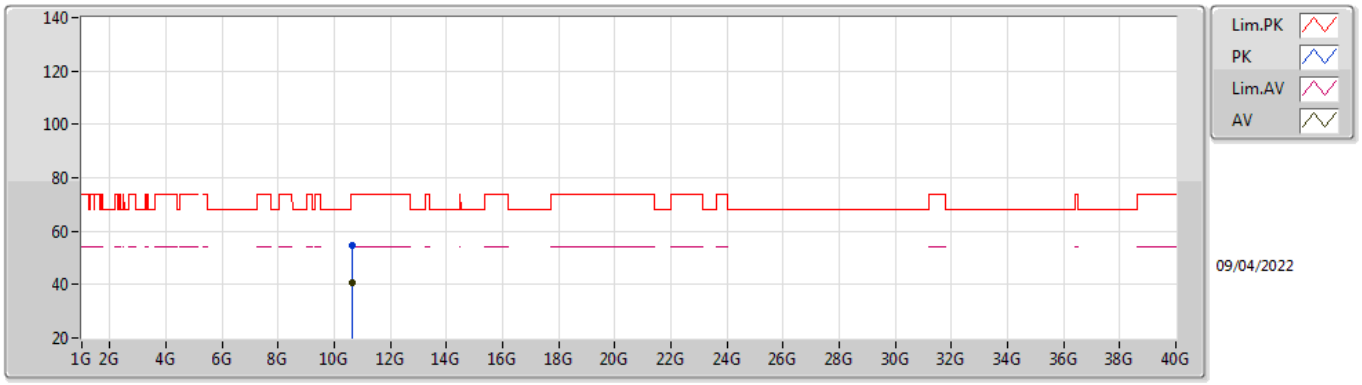


EUT Y_2TX
Setting 17
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6437G	54.40	74.00	-19.60	40.86	3	Horizontal	360	1.66	-	38.29	10.60	35.35
AV	10.64266G	40.44	54.00	-13.56	26.90	3	Horizontal	360	1.66	-	38.29	10.60	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

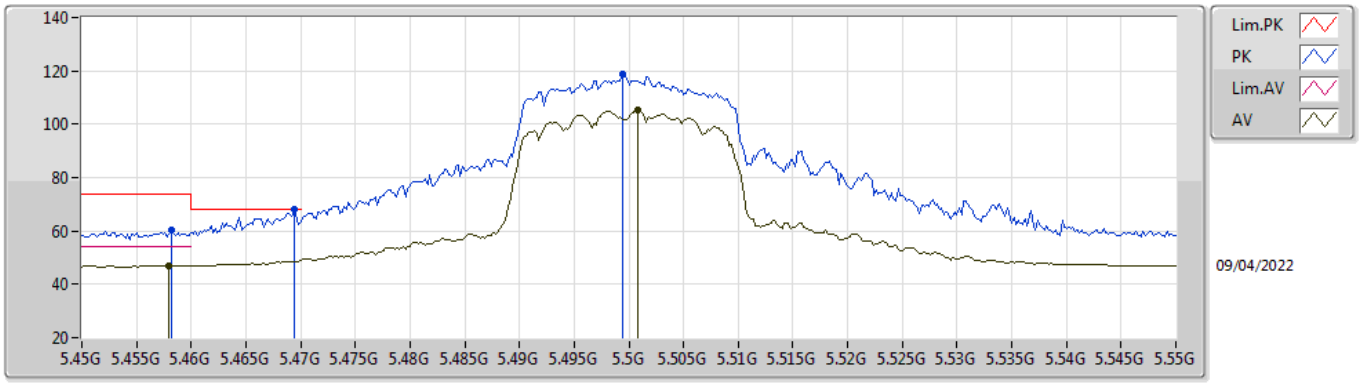


EUT Y_2TX
Setting 16
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4582G	60.54	74.00	-13.46	54.11	3	Vertical	4	1.88	-	34.52	7.26	35.35
AV	5.458G	46.94	54.00	-7.06	40.51	3	Vertical	4	1.88	-	34.52	7.26	35.35
PK	5.4694G	67.97	68.20	-0.23	61.51	3	Vertical	4	1.88	-	34.54	7.27	35.35
PK	5.4994G	118.57	Inf	-Inf	112.02	3	Vertical	4	1.88	-	34.60	7.30	35.35
AV	5.5008G	105.21	Inf	-Inf	98.66	3	Vertical	4	1.88	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

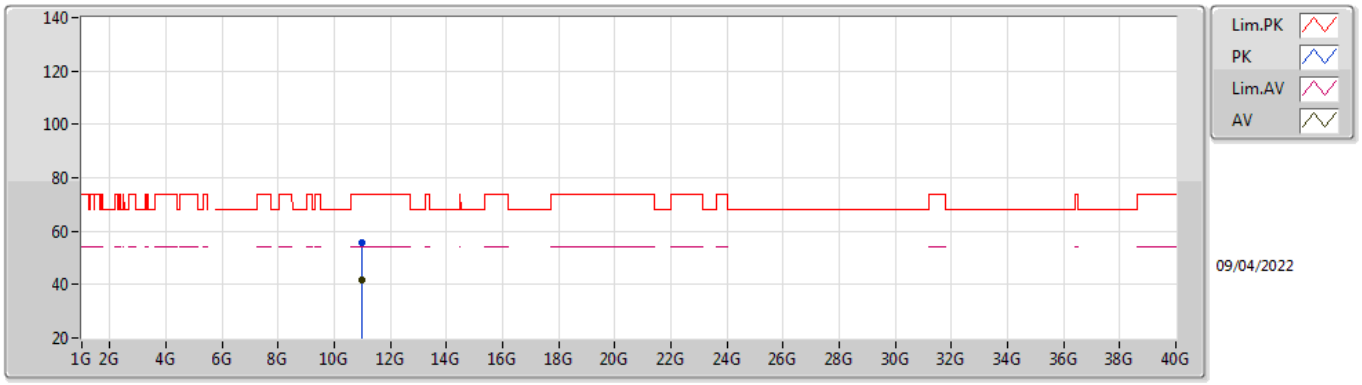


EUT Y_2TX
Setting 16
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0035G	55.67	74.00	-18.33	41.66	3	Vertical	63	1.90	-	38.40	10.65	35.04
AV	11.00252G	41.63	54.00	-12.37	27.62	3	Vertical	63	1.90	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

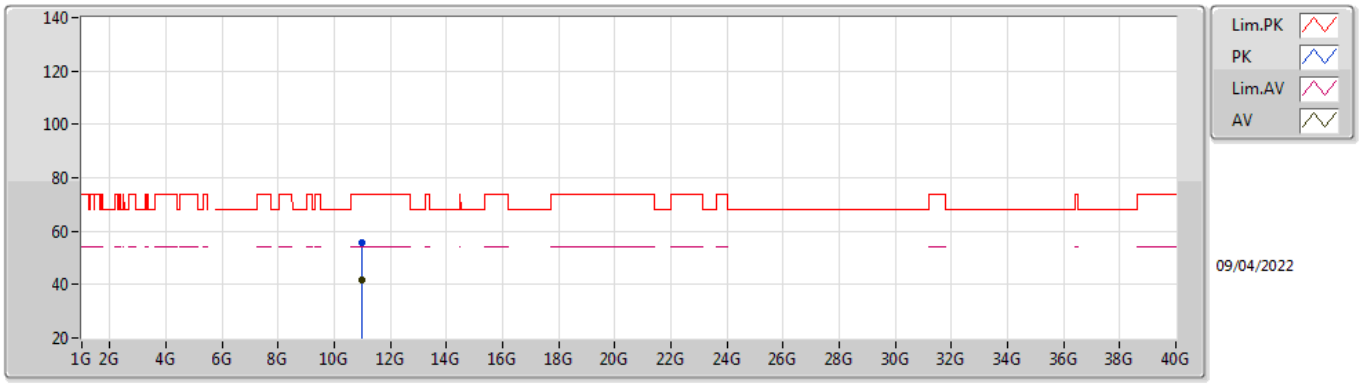


EUT Y_2TX
Setting 16
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.005G	55.79	74.00	-18.21	41.78	3	Horizontal	205	1.39	-	38.41	10.65	35.05
AV	11.0025G	41.68	54.00	-12.32	27.67	3	Horizontal	205	1.39	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

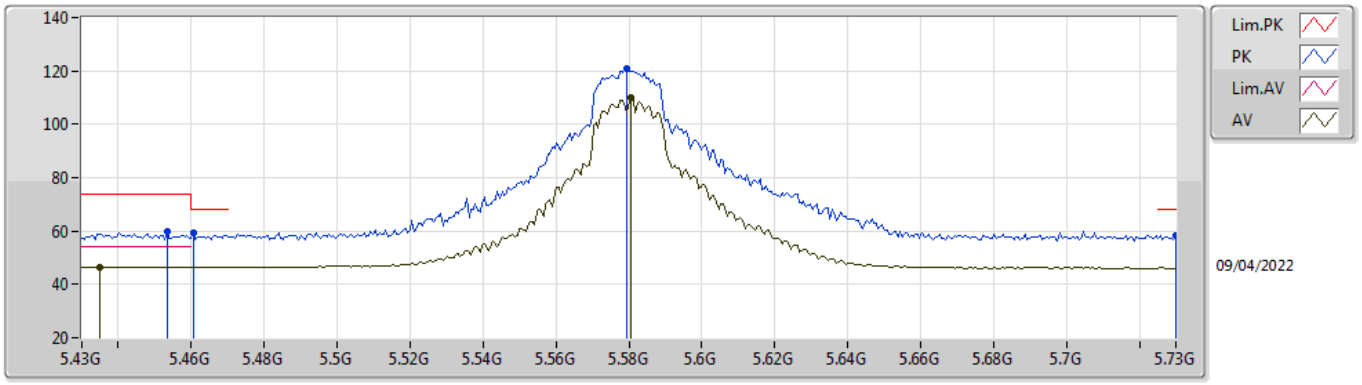


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4534G	59.76	74.00	-14.24	53.35	3	Vertical	1	1.80	-	34.51	7.25	35.35
AV	5.4348G	46.54	54.00	-7.46	40.13	3	Vertical	1	1.80	-	34.53	7.23	35.35
PK	5.4606G	59.07	68.20	-9.13	52.64	3	Vertical	1	1.80	-	34.52	7.26	35.35
PK	5.5794G	120.63	Inf	-Inf	114.04	3	Vertical	1	1.80	-	34.60	7.38	35.39
AV	5.5806G	109.81	Inf	-Inf	103.22	3	Vertical	1	1.80	-	34.60	7.38	35.39
PK	5.73G	58.20	68.20	-10.00	52.03	3	Vertical	1	1.80	-	34.24	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

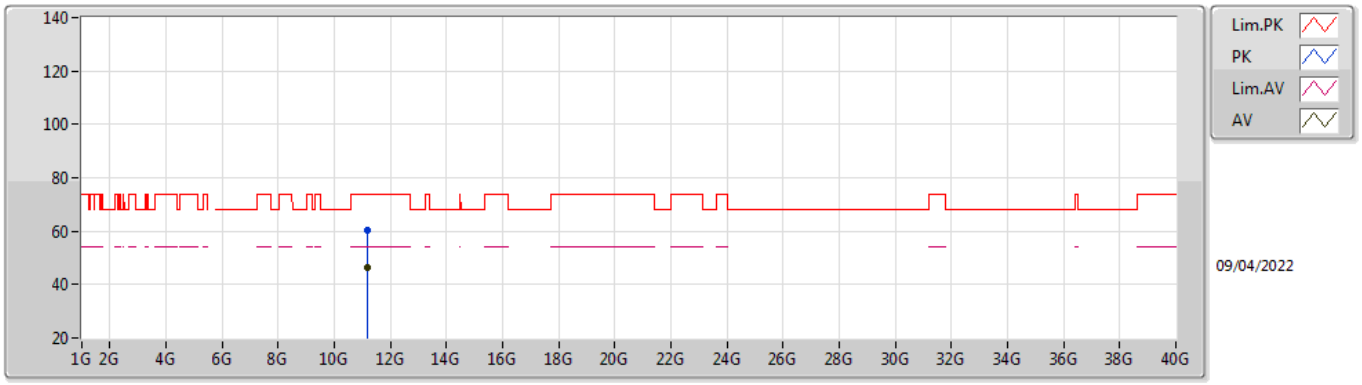


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.16324G	60.24	74.00	-13.76	46.23	3	Vertical	176	1.91	-	38.56	10.67	35.22
AV	11.15804G	46.45	54.00	-7.55	32.44	3	Vertical	176	1.91	-	38.56	10.67	35.22

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

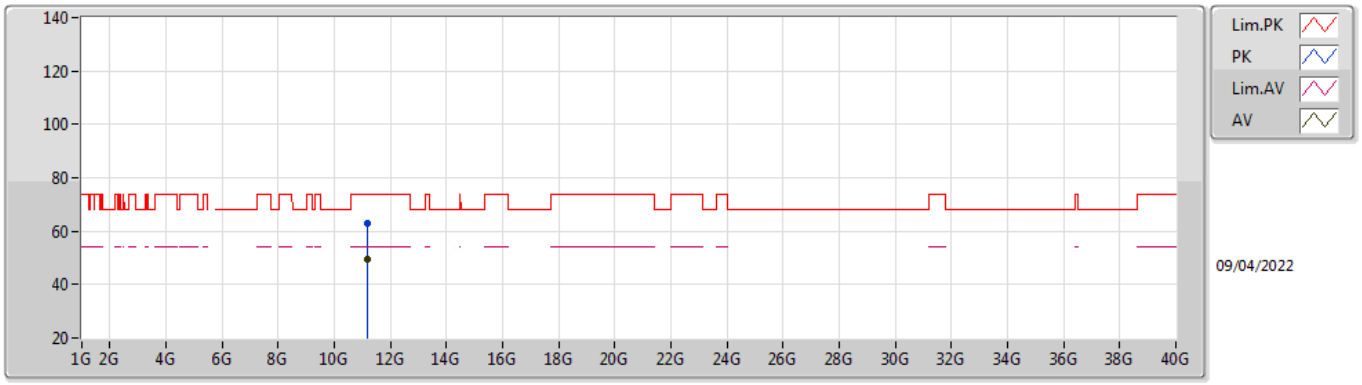


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.15976G	62.89	74.00	-11.11	48.88	3	Horizontal	64	1.07	-	38.56	10.67	35.22
AV	11.15744G	49.47	54.00	-4.53	35.46	3	Horizontal	64	1.07	-	38.56	10.67	35.22

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

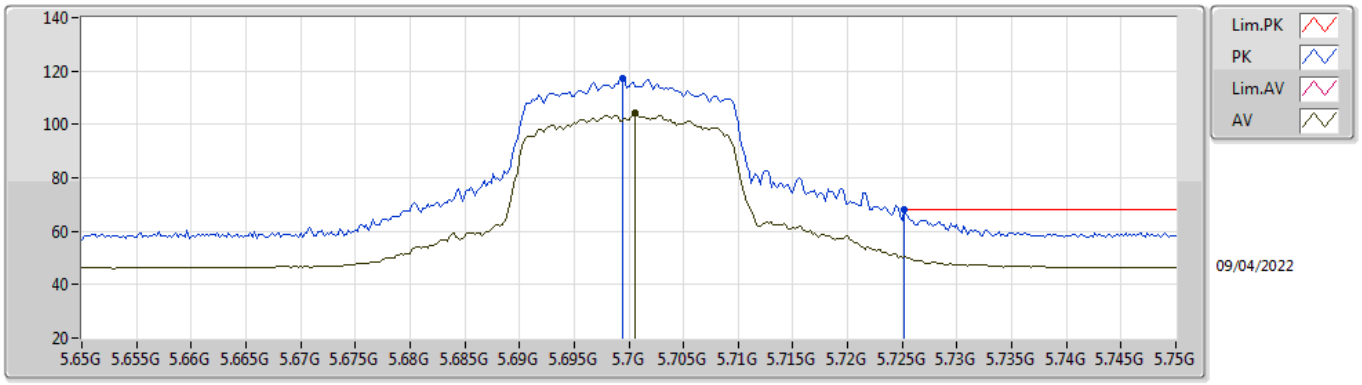


EUT Y_2TX
Setting 14.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6994G	117.18	Inf	-Inf	110.93	3	Vertical	3	1.80	-	34.30	7.40	35.45
AV	5.7006G	104.16	Inf	-Inf	97.91	3	Vertical	3	1.80	-	34.30	7.40	35.45
PK	5.7252G	67.97	68.20	-0.23	61.78	3	Vertical	3	1.80	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

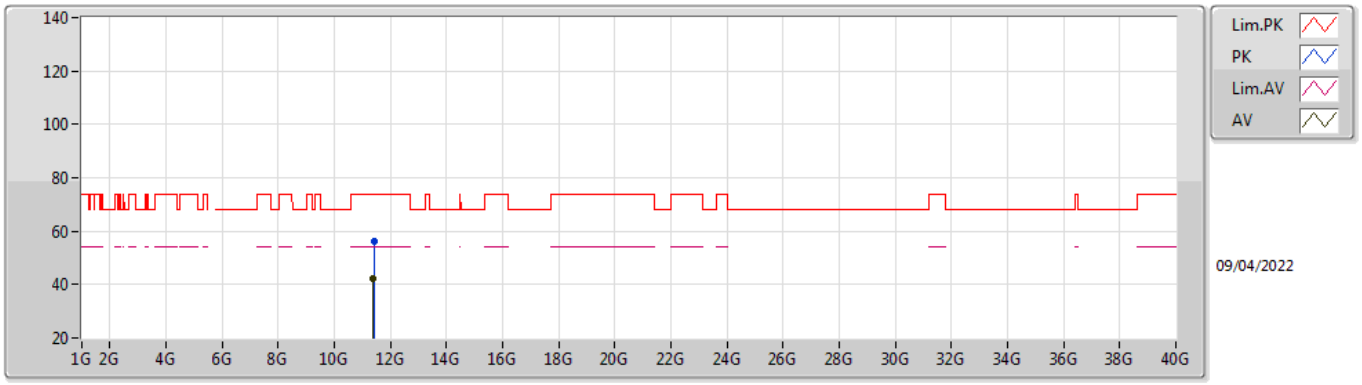


EUT Y_2TX
Setting 14.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.40352G	56.30	74.00	-17.70	42.27	3	Vertical	298	1.45	-	38.81	10.71	35.49
AV	11.39596G	42.24	54.00	-11.76	28.21	3	Vertical	298	1.45	-	38.80	10.71	35.48

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

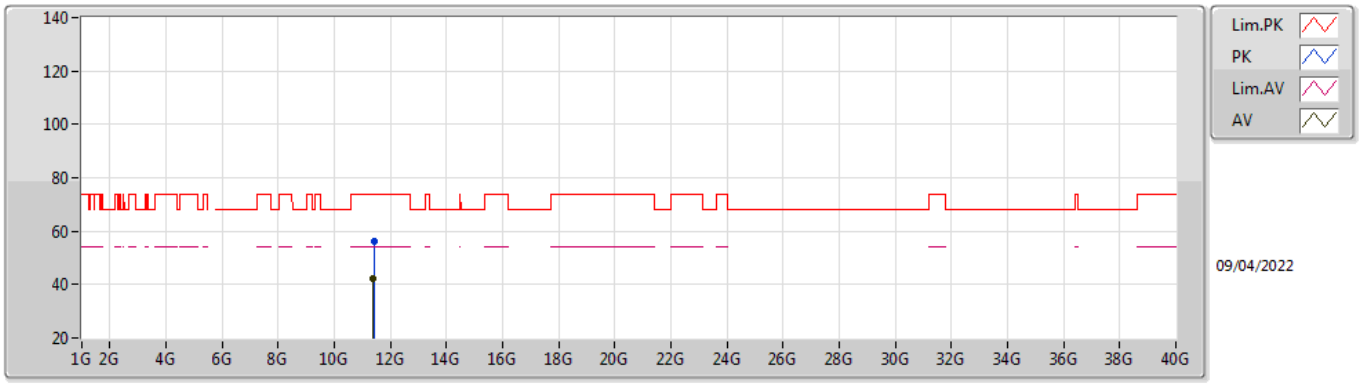


EUT Y_2TX
Setting 14.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4028G	56.00	74.00	-18.00	41.97	3	Horizontal	48	1.51	-	38.81	10.71	35.49
AV	11.39838G	42.22	54.00	-11.78	28.20	3	Horizontal	48	1.51	-	38.80	10.71	35.49

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

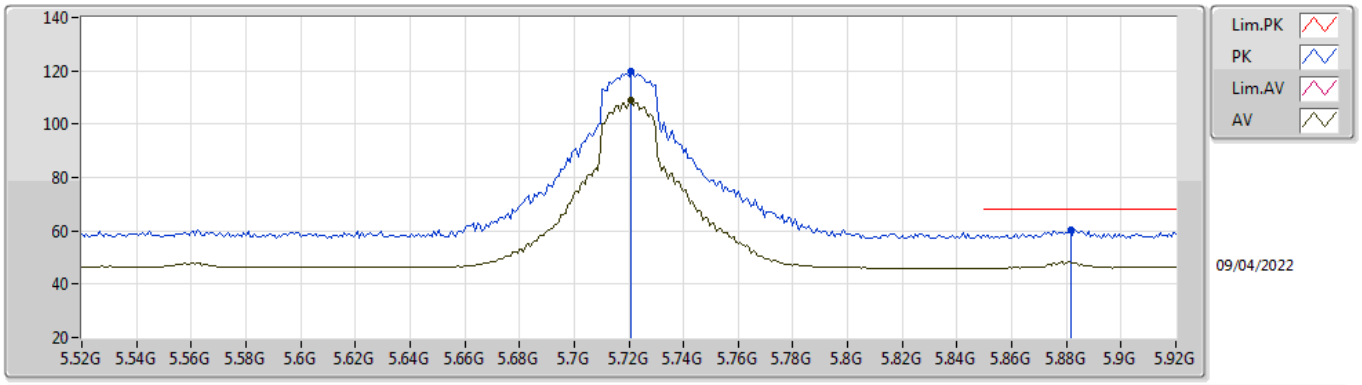


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7208G	119.92	Inf	-Inf	113.72	3	Vertical	0	1.80	-	34.26	7.40	35.46
AV	5.7208G	108.97	Inf	-Inf	102.77	3	Vertical	0	1.80	-	34.26	7.40	35.46
PK	5.8816G	60.51	68.20	-7.69	54.08	3	Vertical	0	1.80	-	34.49	7.48	35.54

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

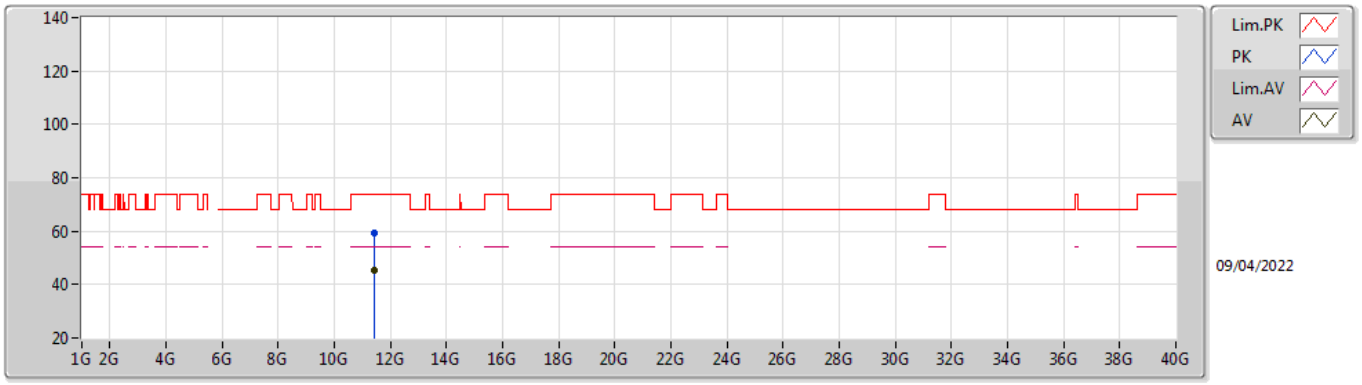


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.443G	59.28	74.00	-14.72	45.21	3	Vertical	170	1.80	-	38.89	10.72	35.54
AV	11.4404G	45.25	54.00	-8.75	31.18	3	Vertical	170	1.80	-	38.88	10.72	35.53

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

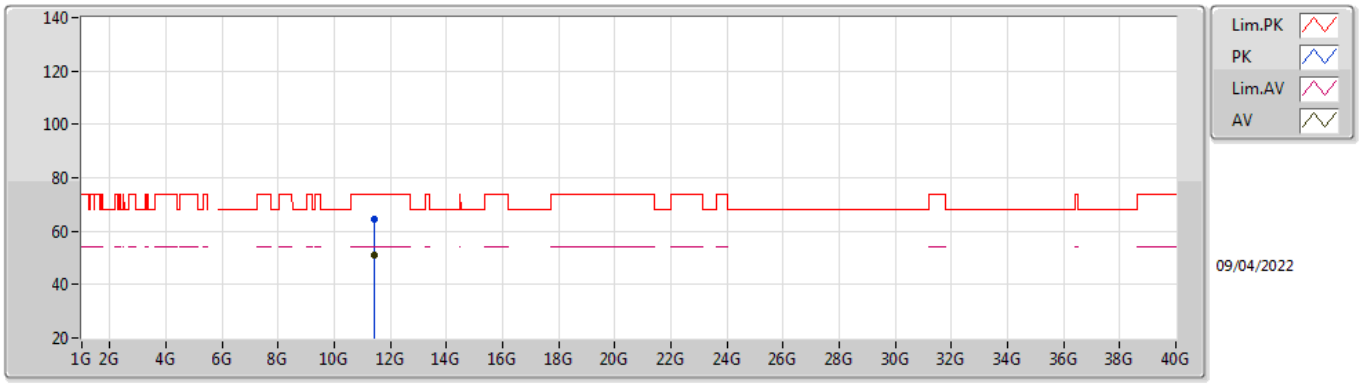


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4426G	64.28	74.00	-9.72	50.21	3	Horizontal	143	1.76	-	38.89	10.72	35.54
AV	11.43756G	51.28	54.00	-2.72	37.21	3	Horizontal	143	1.76	-	38.88	10.72	35.53

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

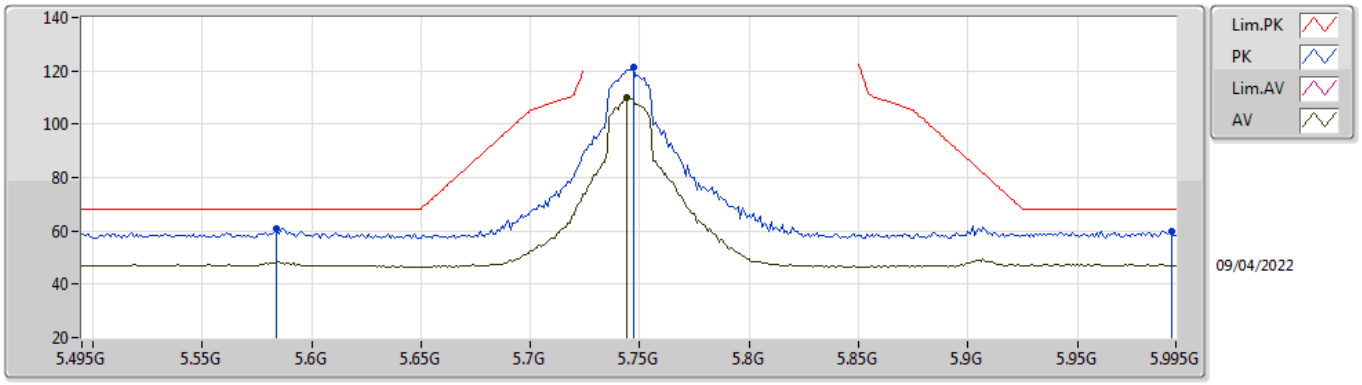


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.584G	61.02	68.20	-7.18	54.43	3	Vertical	2	1.80	-	34.60	7.38	35.39
PK	5.747G	121.26	Inf	-Inf	115.12	3	Vertical	2	1.80	-	34.21	7.40	35.47
AV	5.744G	109.84	Inf	-Inf	103.70	3	Vertical	2	1.80	-	34.21	7.40	35.47
PK	5.993G	60.05	68.20	-8.15	53.26	3	Vertical	2	1.80	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

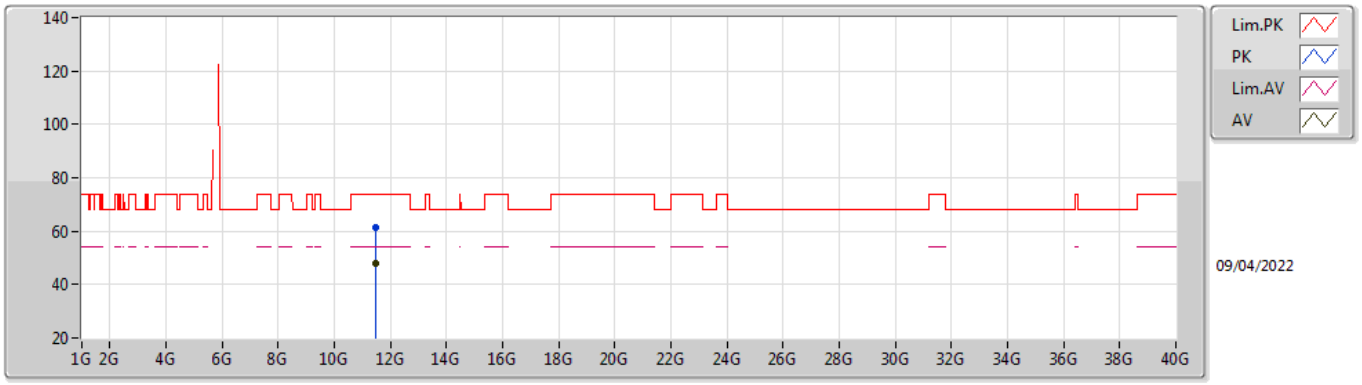


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4906G	61.30	74.00	-12.70	47.19	3	Vertical	184	2.44	-	38.98	10.72	35.59
AV	11.4906G	47.91	54.00	-6.09	33.80	3	Vertical	184	2.44	-	38.98	10.72	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

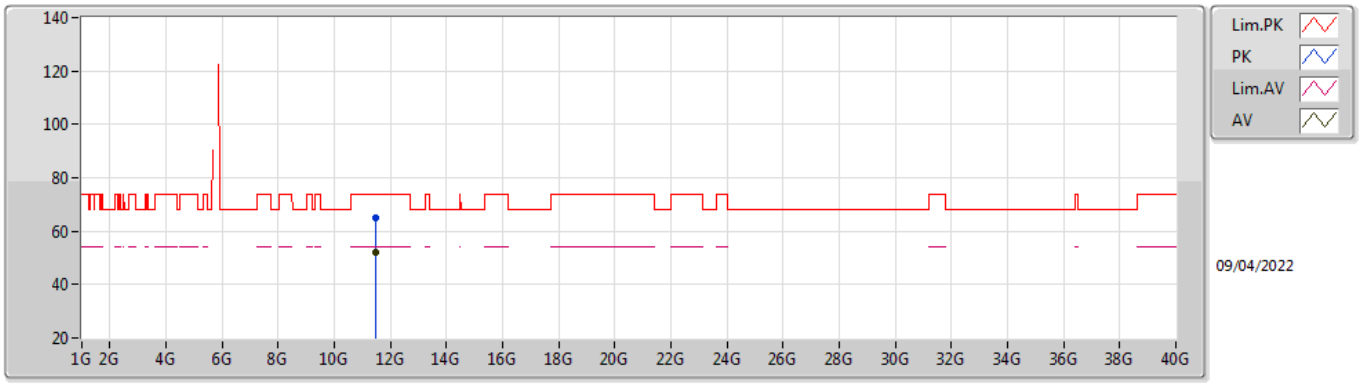


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.49024G	64.92	74.00	-9.08	50.81	3	Horizontal	137	1.80	-	38.98	10.72	35.59
AV	11.48768G	52.07	54.00	-1.93	37.96	3	Horizontal	137	1.80	-	38.98	10.72	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

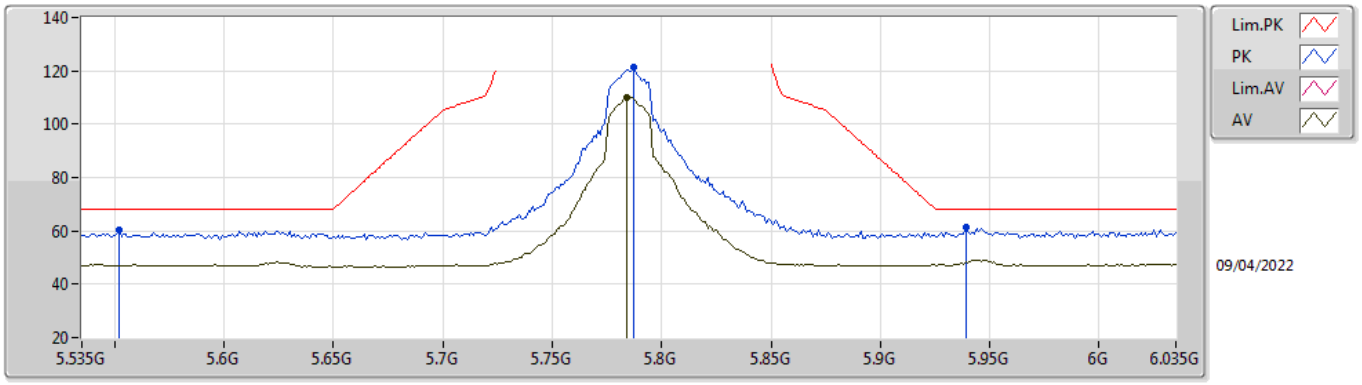


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.552G	60.29	68.20	-7.91	53.72	3	Vertical	0	1.80	-	34.60	7.35	35.38
PK	5.787G	121.59	Inf	-Inf	115.48	3	Vertical	0	1.80	-	34.20	7.40	35.49
AV	5.784G	110.19	Inf	-Inf	104.08	3	Vertical	0	1.80	-	34.20	7.40	35.49
PK	5.939G	61.26	68.20	-6.94	54.53	3	Vertical	0	1.80	-	34.76	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

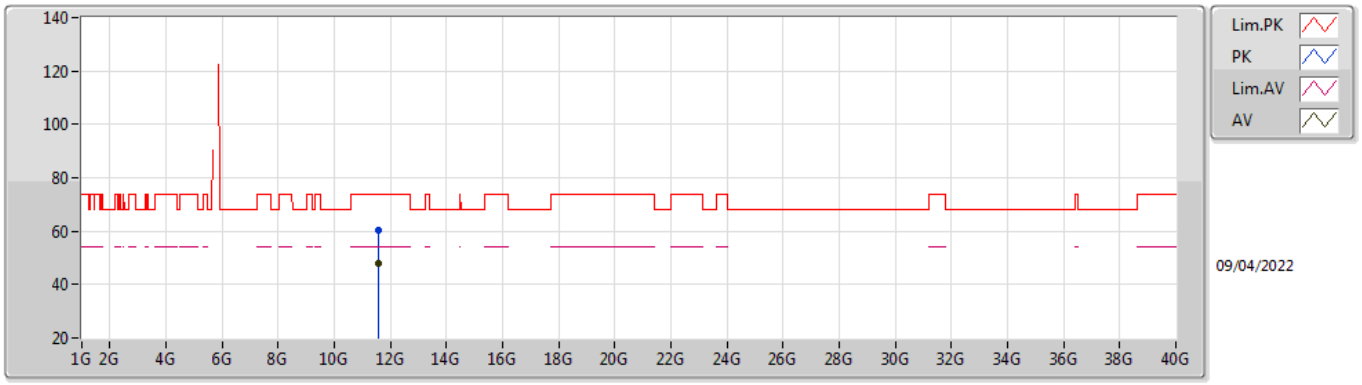


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.57272G	60.44	74.00	-13.56	45.99	3	Vertical	183	1.00	-	39.29	10.74	35.58
AV	11.57068G	47.74	54.00	-6.26	33.30	3	Vertical	183	1.00	-	39.28	10.74	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

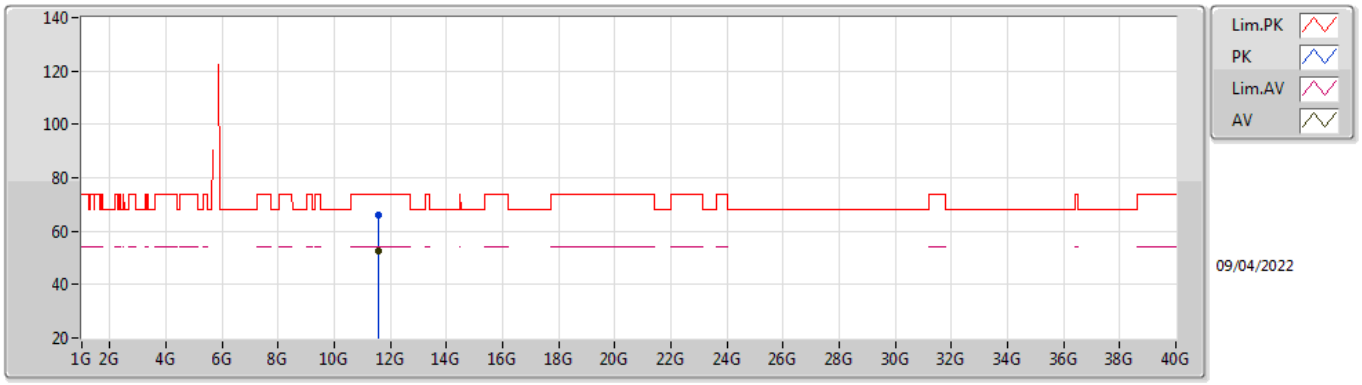


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.57024G	65.86	74.00	-8.14	51.42	3	Horizontal	137	1.80	-	39.28	10.74	35.58
AV	11.56776G	52.82	54.00	-1.18	38.40	3	Horizontal	137	1.80	-	39.27	10.74	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

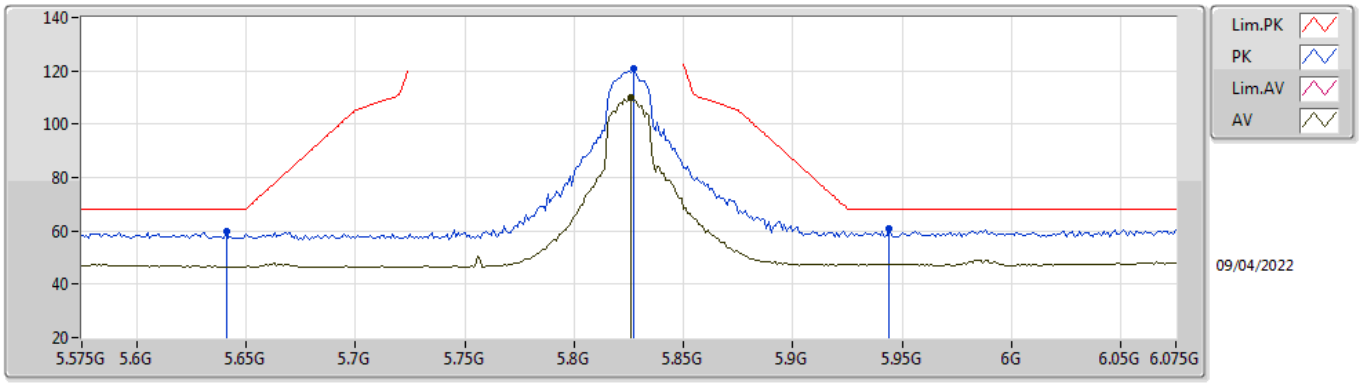


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.641G	59.75	68.20	-8.45	53.25	3	Vertical	3	1.80	-	34.52	7.40	35.42
PK	5.827G	121.02	Inf	-Inf	114.85	3	Vertical	3	1.80	-	34.25	7.43	35.51
AV	5.826G	110.01	Inf	-Inf	103.84	3	Vertical	3	1.80	-	34.25	7.43	35.51
PK	5.944G	60.71	68.20	-7.49	53.96	3	Vertical	3	1.80	-	34.78	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

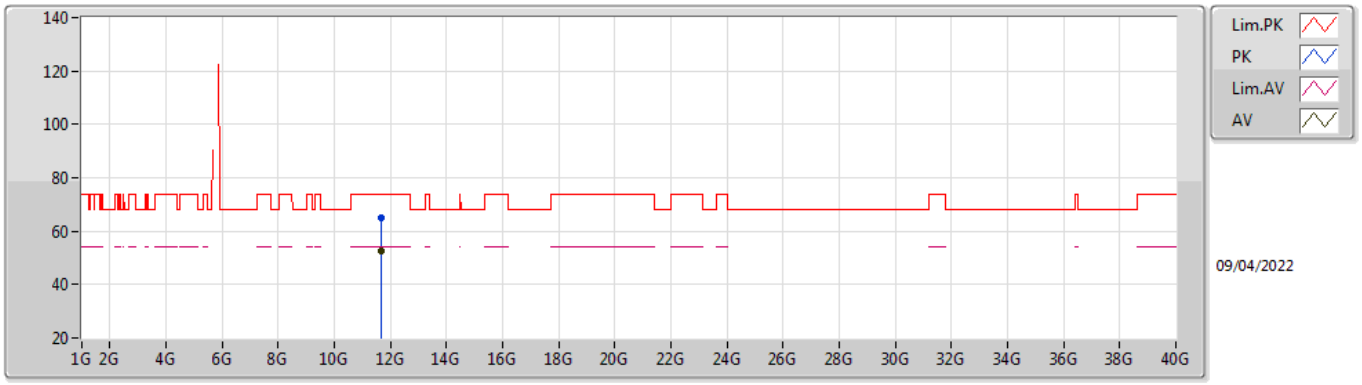


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65008G	65.09	74.00	-8.91	50.51	3	Vertical	137	1.78	-	39.40	10.75	35.57
AV	11.6476G	52.38	54.00	-1.62	37.80	3	Vertical	137	1.78	-	39.40	10.75	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

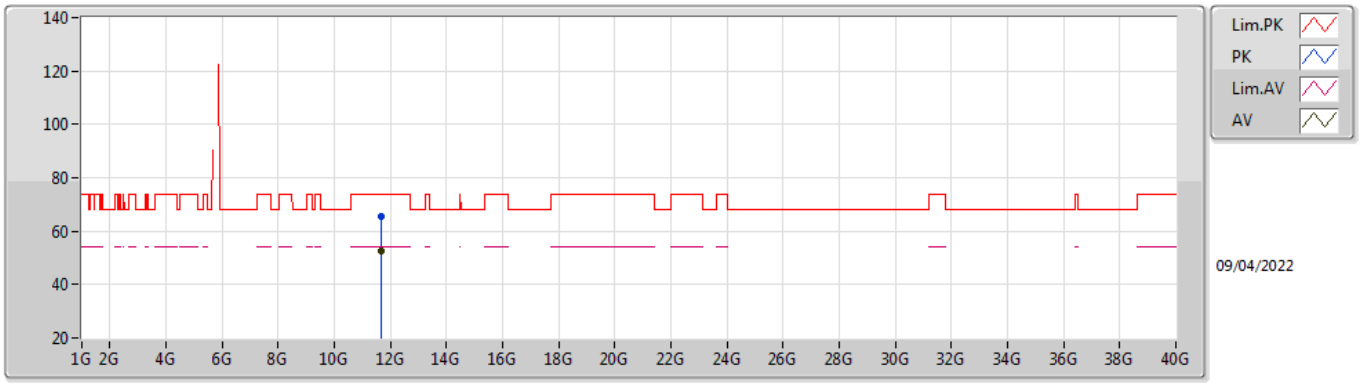


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65004G	65.33	74.00	-8.67	50.75	3	Horizontal	137	1.78	-	39.40	10.75	35.57
AV	11.6476G	52.34	54.00	-1.66	37.76	3	Horizontal	137	1.78	-	39.40	10.75	35.57

802.11ax HEW40_Nss1,(MCS0)_2TX

5190MHz_TnomVnom

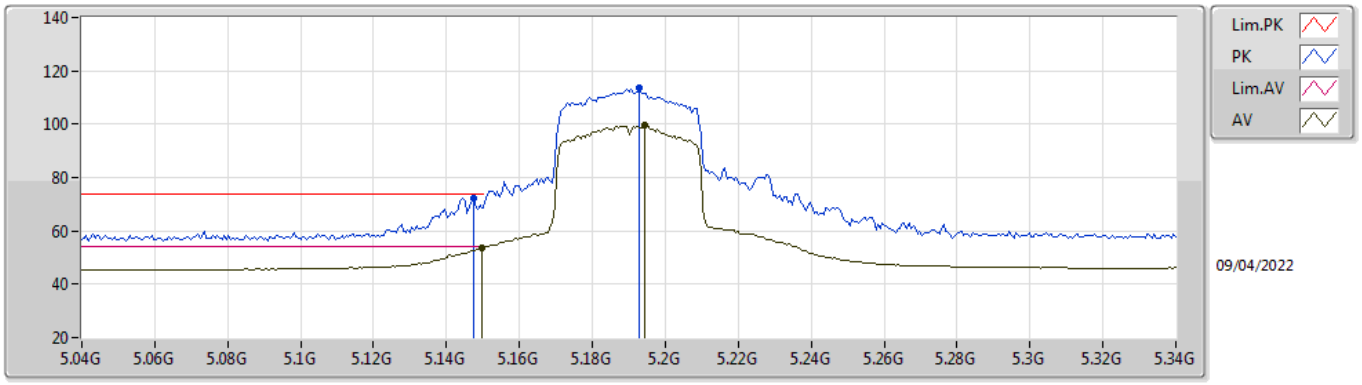


EUT Y_2TX
Setting 15.75
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1474G	72.48	74.00	-1.52	66.66	3	Vertical	354	1.75	-	33.99	7.17	35.34
AV	5.1498G	53.87	54.00	-0.13	48.04	3	Vertical	354	1.75	-	34.00	7.17	35.34
PK	5.193G	113.44	Inf	-Inf	107.41	3	Vertical	354	1.75	-	34.17	7.20	35.34
AV	5.1942G	99.86	Inf	-Inf	93.82	3	Vertical	354	1.75	-	34.18	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5190MHz_TnomVnom

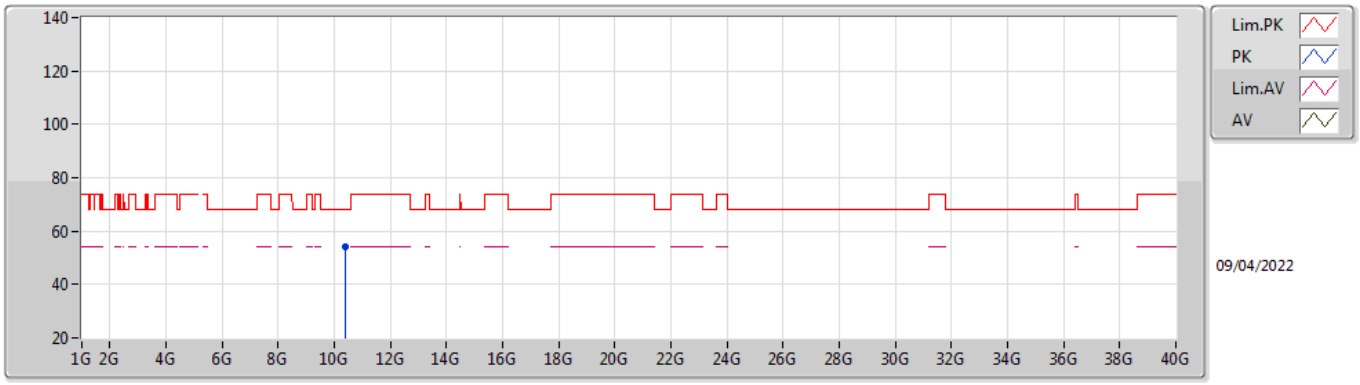


EUT Y_2TX
Setting 15.75
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.38202G	54.37	68.20	-13.83	41.19	3	Vertical	132	1.67	-	38.18	10.56	35.56

802.11ax HEW40_Nss1,(MCS0)_2TX

5190MHz_TnomVnom

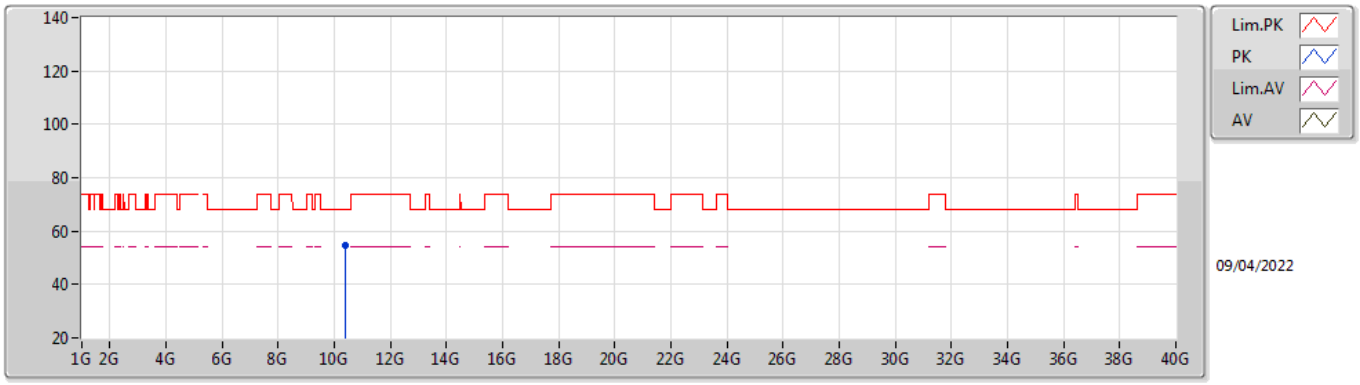


EUT Y_2TX
Setting 15.75
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.37624G	54.68	68.20	-13.52	41.51	3	Horizontal	149	1.02	-	38.18	10.56	35.57

802.11ax HEW40_Nss1,(MCS0)_2TX

5230MHz_TnomVnom

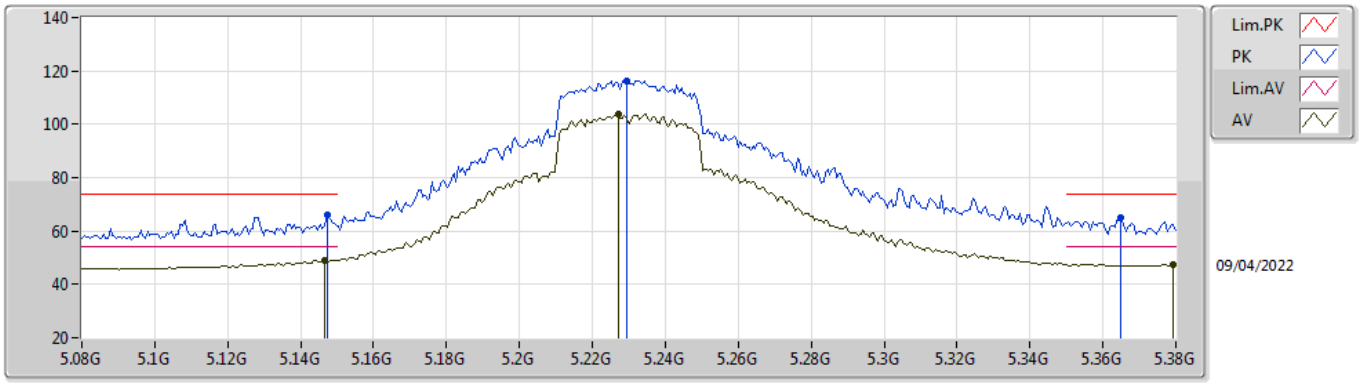


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1472G	66.09	74.00	-7.91	60.27	3	Vertical	356	1.79	-	33.99	7.17	35.34
AV	5.1466G	49.17	54.00	-4.83	43.35	3	Vertical	356	1.79	-	33.99	7.17	35.34
PK	5.2294G	116.46	Inf	-Inf	110.28	3	Vertical	356	1.79	-	34.32	7.20	35.34
AV	5.227G	103.91	Inf	-Inf	97.74	3	Vertical	356	1.79	-	34.31	7.20	35.34
PK	5.365G	64.87	74.00	-9.13	58.48	3	Vertical	356	1.79	-	34.53	7.20	35.34
AV	5.3794G	47.37	54.00	-6.63	40.96	3	Vertical	356	1.79	-	34.56	7.20	35.35

802.11ax HEW40_Nss1,(MCS0)_2TX

5230MHz_TnomVnom

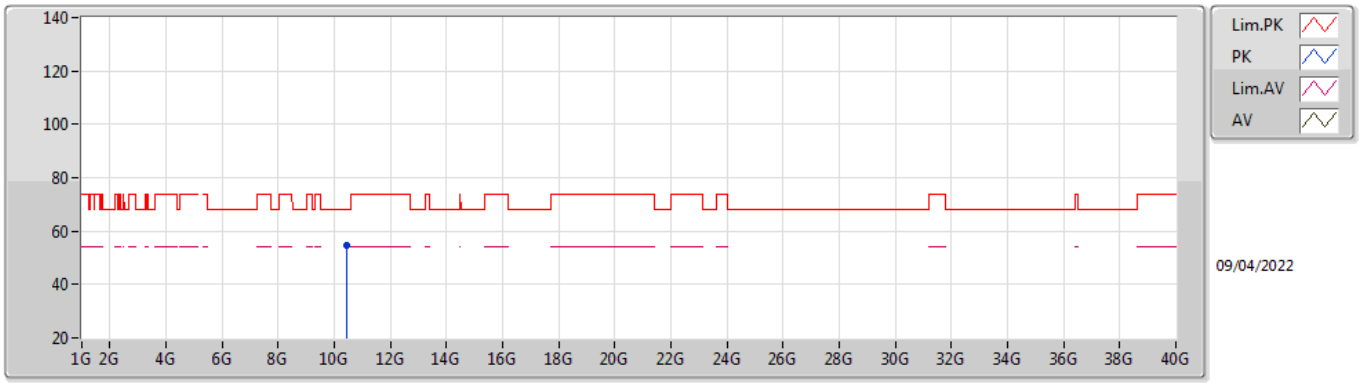


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.45744G	54.59	68.20	-13.61	41.32	3	Vertical	3	2.90	-	38.20	10.57	35.50

802.11ax HEW40_Nss1,(MCS0)_2TX

5230MHz_TnomVnom

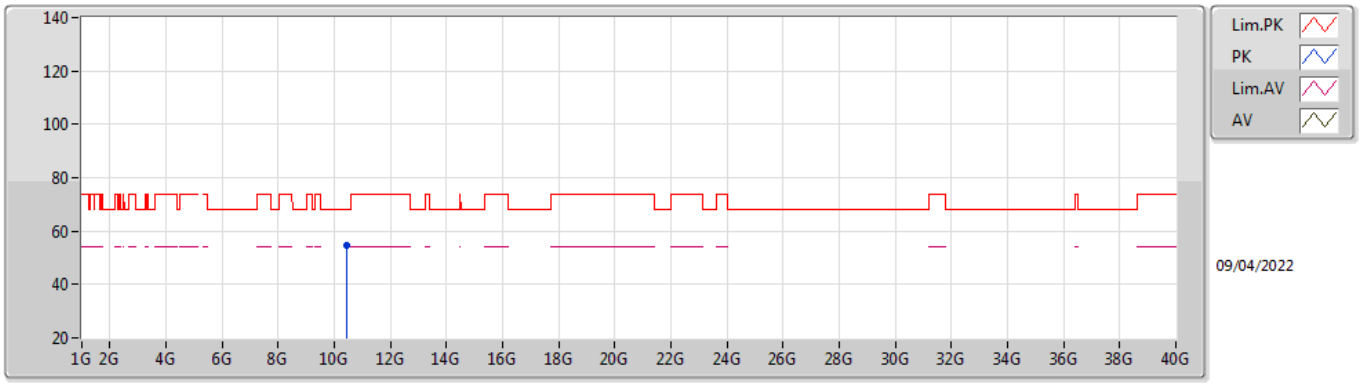


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.45566G	54.41	68.20	-13.79	41.15	3	Horizontal	146	1.44	-	38.20	10.57	35.51

802.11ax HEW40_Nss1,(MCS0)_2TX

5270MHz_TnomVnom

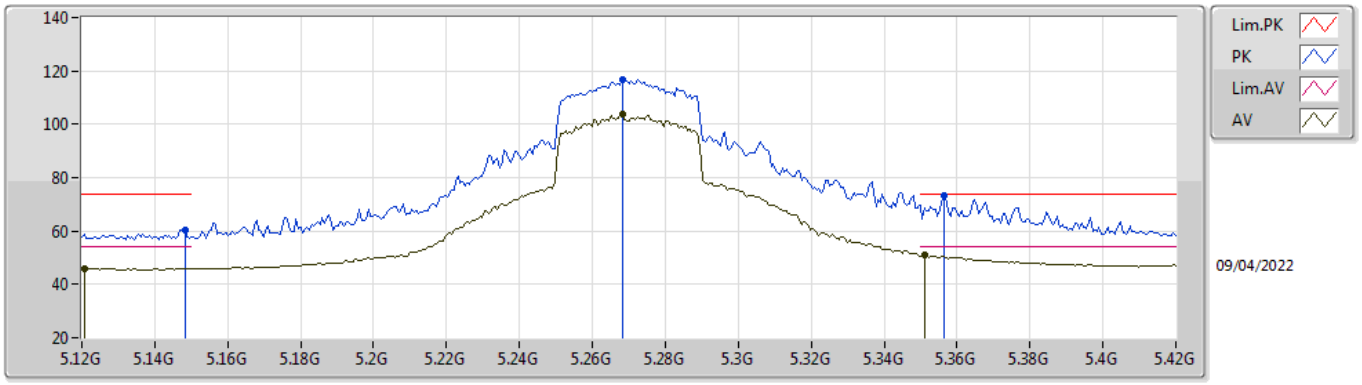


EUT Y_2TX
Setting 20.25
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1482G	60.47	74.00	-13.53	54.64	3	Vertical	0	1.94	-	34.00	7.17	35.34
AV	5.1206G	45.93	54.00	-8.07	40.16	3	Vertical	0	1.94	-	33.94	7.16	35.33
PK	5.2682G	116.93	Inf	-Inf	110.63	3	Vertical	0	1.94	-	34.44	7.20	35.34
AV	5.2682G	103.62	Inf	-Inf	97.32	3	Vertical	0	1.94	-	34.44	7.20	35.34
PK	5.3564G	73.38	74.00	-0.62	67.01	3	Vertical	0	1.94	-	34.51	7.20	35.34
AV	5.351G	51.22	54.00	-2.78	44.86	3	Vertical	0	1.94	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5270MHz_TnomVnom

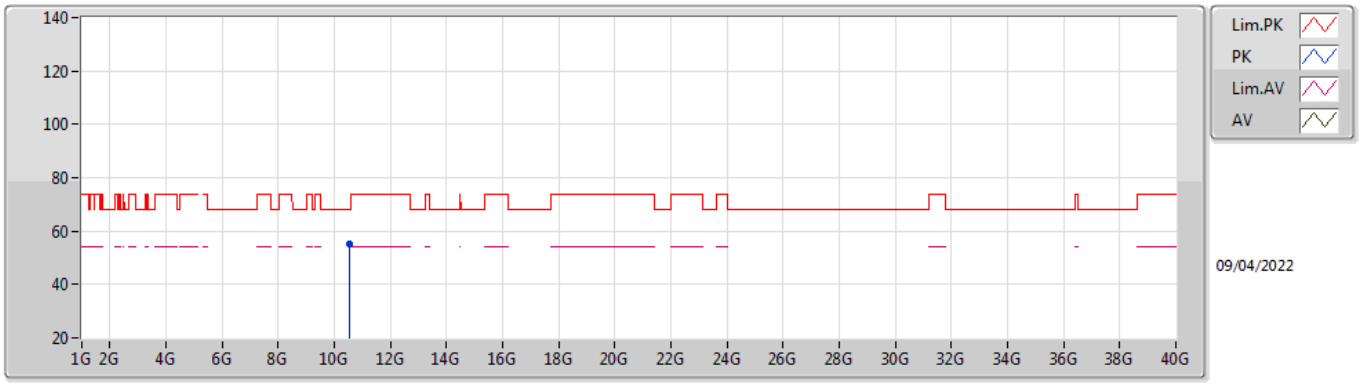


EUT Y_2TX
Setting 20.25
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.54008G	55.08	68.20	-13.12	41.74	3	Vertical	99	2.04	-	38.20	10.58	35.44

802.11ax HEW40_Nss1,(MCS0)_2TX

5270MHz_TnomVnom

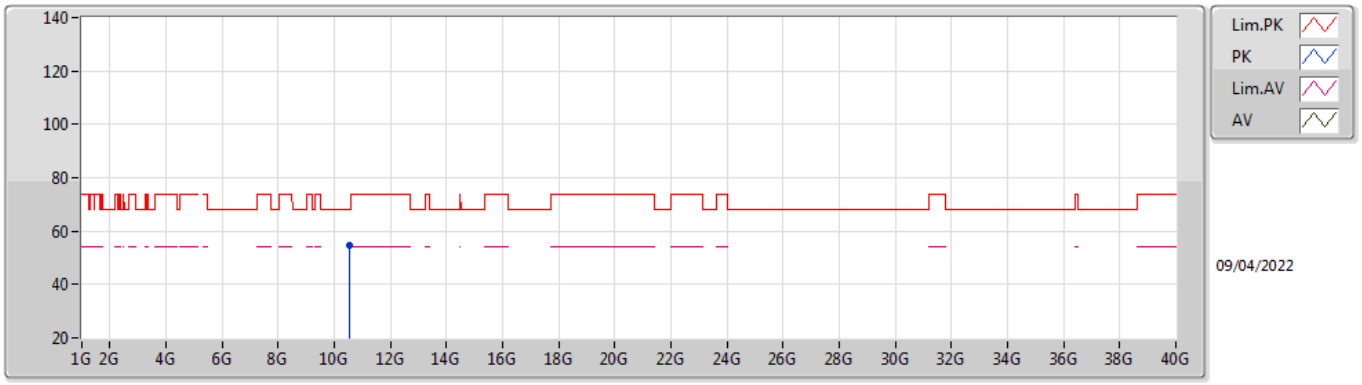


EUT Y_2TX
Setting 20.25
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.54056G	54.73	68.20	-13.47	41.39	3	Horizontal	77	1.87	-	38.20	10.58	35.44

802.11ax HEW40_Nss1,(MCS0)_2TX

5310MHz_TnomVnom

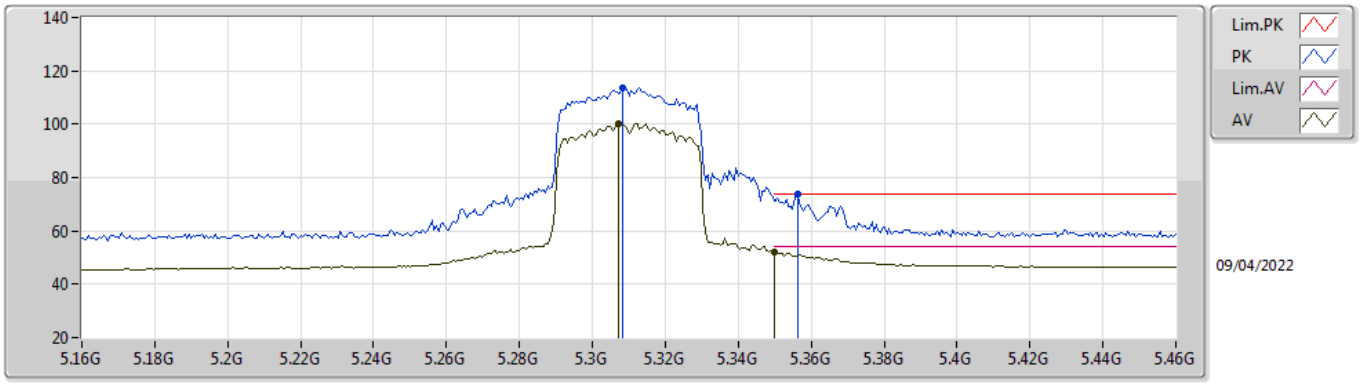


EUT Y_2TX
Setting 14.75
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3082G	113.72	Inf	-Inf	107.36	3	Vertical	0	1.90	-	34.50	7.20	35.34
AV	5.307G	100.20	Inf	-Inf	93.84	3	Vertical	0	1.90	-	34.50	7.20	35.34
PK	5.3562G	73.84	74.00	-0.16	67.47	3	Vertical	0	1.90	-	34.51	7.20	35.34
AV	5.35G	51.83	54.00	-2.17	45.47	3	Vertical	0	1.90	-	34.50	7.20	35.34

802.11ax HEW40_Nss1,(MCS0)_2TX

5310MHz_TnomVnom

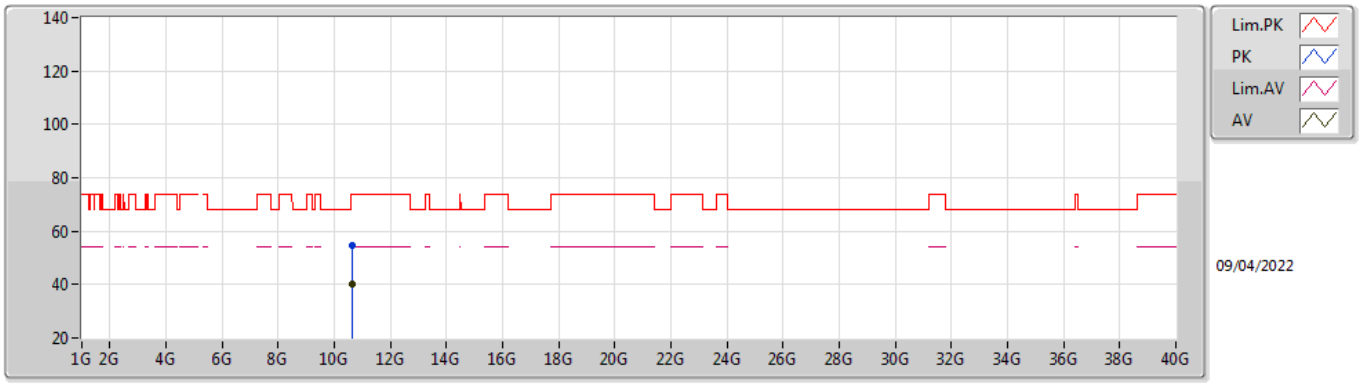


EUT Y_2TX
Setting 14.75
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.62152G	54.71	74.00	-19.29	41.25	3	Vertical	27	2.98	-	38.24	10.59	35.37
AV	10.61718G	40.43	54.00	-13.57	26.98	3	Vertical	27	2.98	-	38.23	10.59	35.37

802.11ax HEW40_Nss1,(MCS0)_2TX

5310MHz_TnomVnom

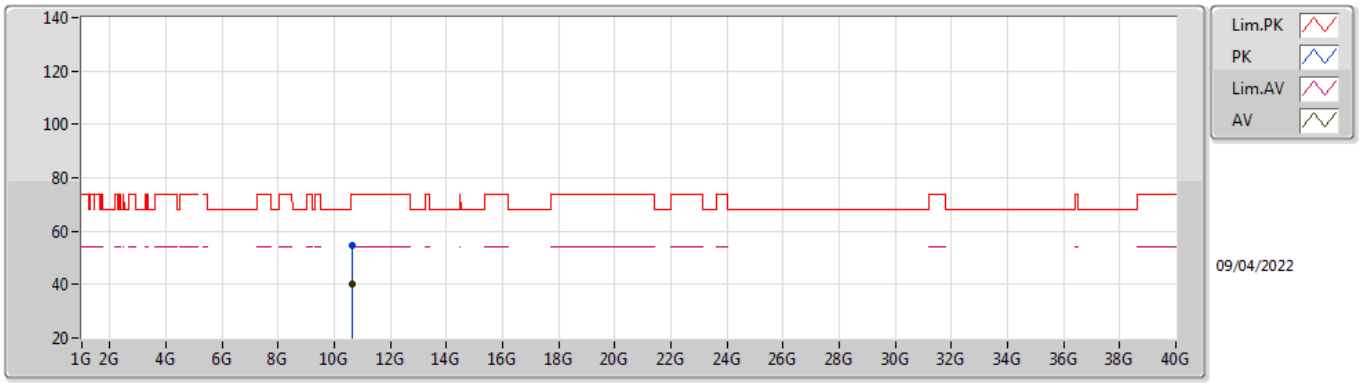


EUT Y_2TX
Setting 14.75
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.61856G	54.81	74.00	-19.19	41.35	3	Horizontal	35	2.41	-	38.24	10.59	35.37
AV	10.6173G	40.40	54.00	-13.60	26.95	3	Horizontal	35	2.41	-	38.23	10.59	35.37

802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TnomVnom

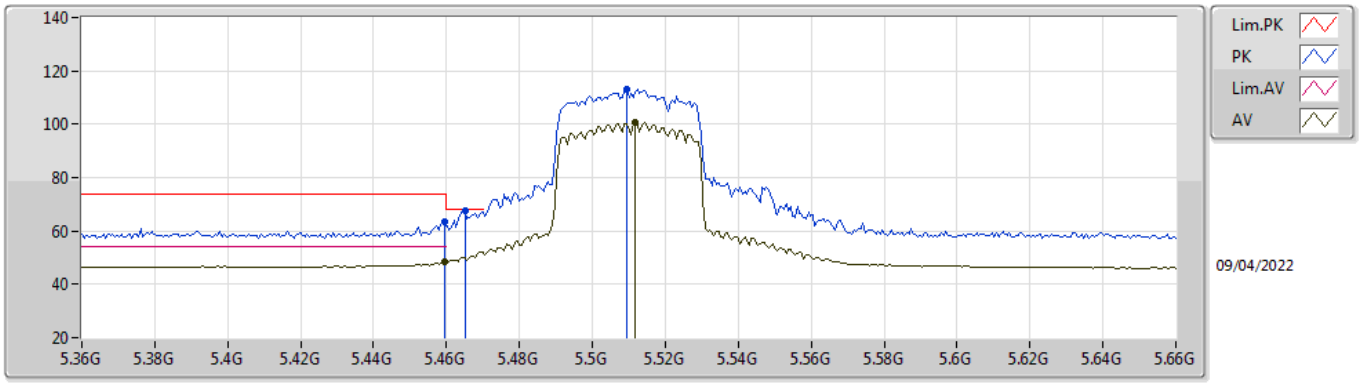


EUT Y_2TX
Setting 14.75
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4596G	63.68	74.00	-10.32	57.25	3	Vertical	2	1.89	-	34.52	7.26	35.35
AV	5.4596G	48.47	54.00	-5.53	42.04	3	Vertical	2	1.89	-	34.52	7.26	35.35
PK	5.465G	67.60	68.20	-0.60	61.16	3	Vertical	2	1.89	-	34.53	7.26	35.35
PK	5.5094G	112.94	Inf	-Inf	106.38	3	Vertical	2	1.89	-	34.60	7.31	35.35
AV	5.5118G	100.68	Inf	-Inf	94.13	3	Vertical	2	1.89	-	34.60	7.31	35.36

802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TnomVnom

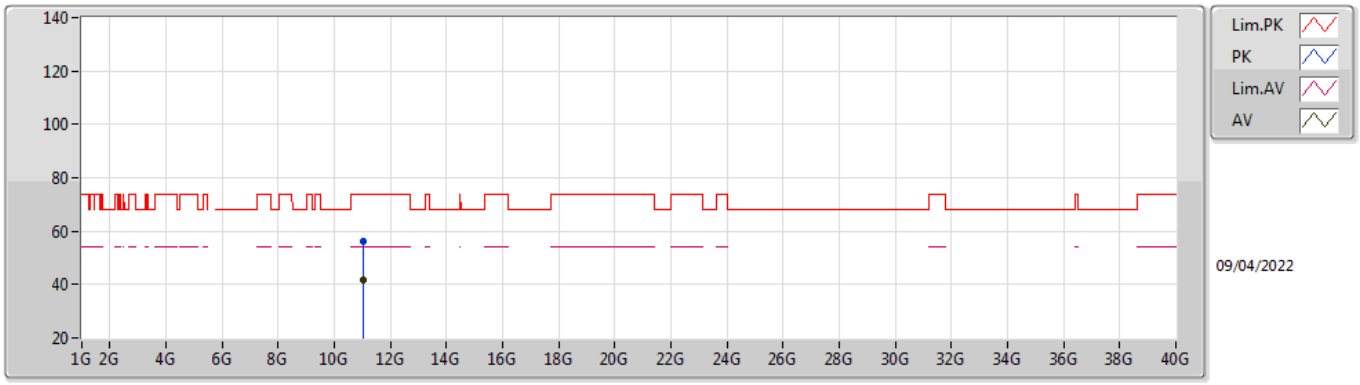


EUT Y_2TX
Setting 14.75
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.02356G	56.42	74.00	-17.58	42.42	3	Vertical	162	2.94	-	38.42	10.65	35.07
AV	11.02114G	41.69	54.00	-12.31	27.68	3	Vertical	162	2.94	-	38.42	10.65	35.06

802.11ax HEW40_Nss1,(MCS0)_2TX

5510MHz_TnomVnom

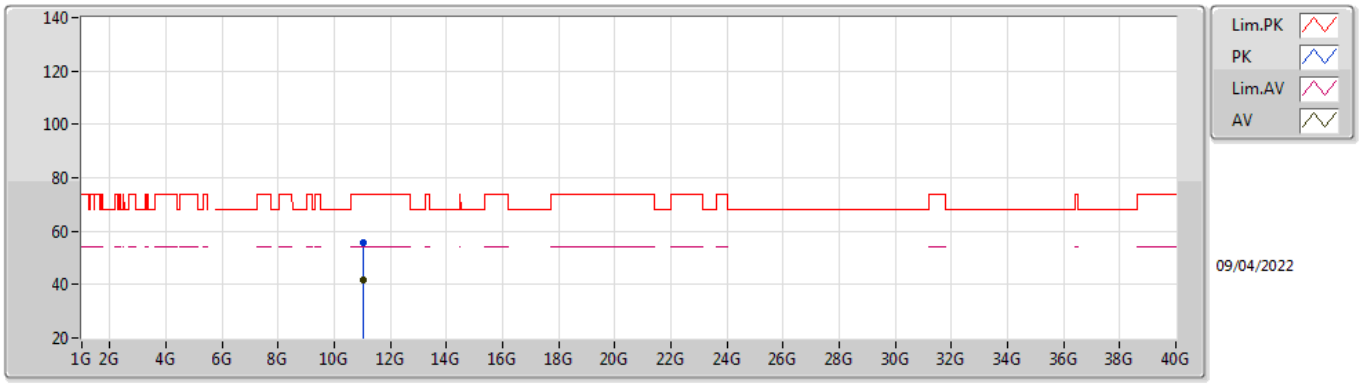


EUT Y_2TX
Setting 14.75
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.01514G	55.66	74.00	-18.34	41.65	3	Horizontal	250	2.06	-	38.42	10.65	35.06
AV	11.02186G	41.72	54.00	-12.28	27.71	3	Horizontal	250	2.06	-	38.42	10.65	35.06

802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TnomVnom

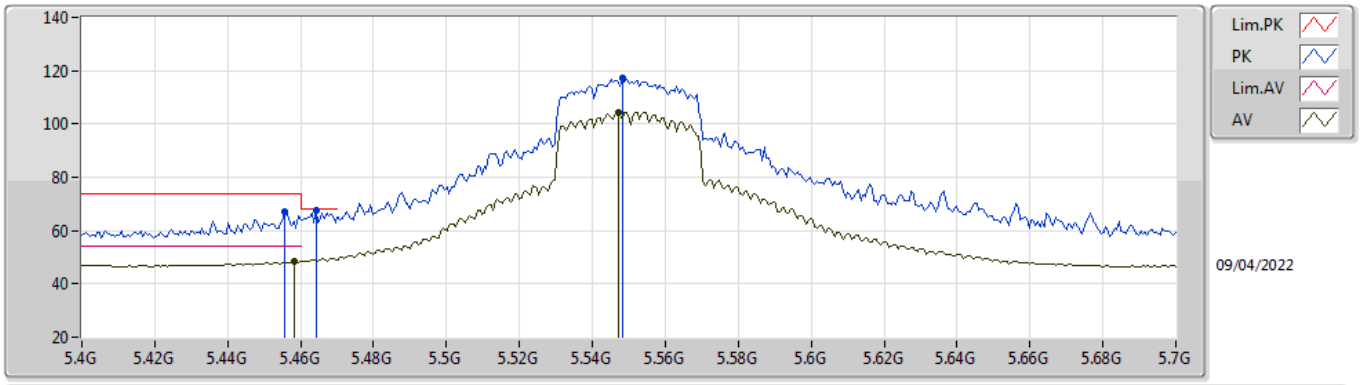


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4558G	66.92	74.00	-7.08	60.50	3	Vertical	0	1.88	-	34.51	7.26	35.35
AV	5.4582G	48.55	54.00	-5.45	42.12	3	Vertical	0	1.88	-	34.52	7.26	35.35
PK	5.4642G	67.37	68.20	-0.83	60.93	3	Vertical	0	1.88	-	34.53	7.26	35.35
PK	5.5482G	117.40	Inf	-Inf	110.82	3	Vertical	0	1.88	-	34.60	7.35	35.37
AV	5.547G	104.54	Inf	-Inf	97.96	3	Vertical	0	1.88	-	34.60	7.35	35.37

802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TnomVnom

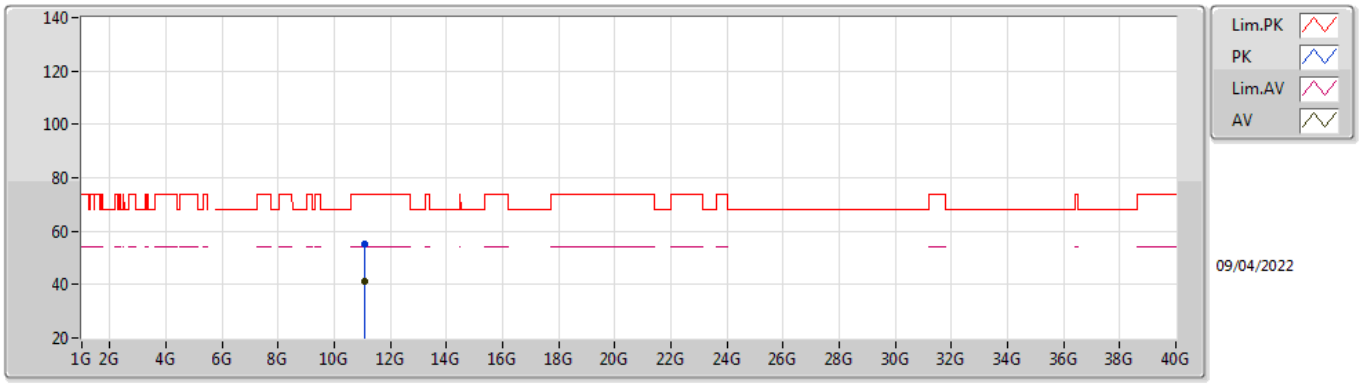


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.09848G	55.21	74.00	-18.79	41.20	3	Vertical	91	1.96	-	38.50	10.66	35.15
AV	11.09536G	41.39	54.00	-12.61	27.38	3	Vertical	91	1.96	-	38.50	10.66	35.15

802.11ax HEW40_Nss1,(MCS0)_2TX

5550MHz_TnomVnom

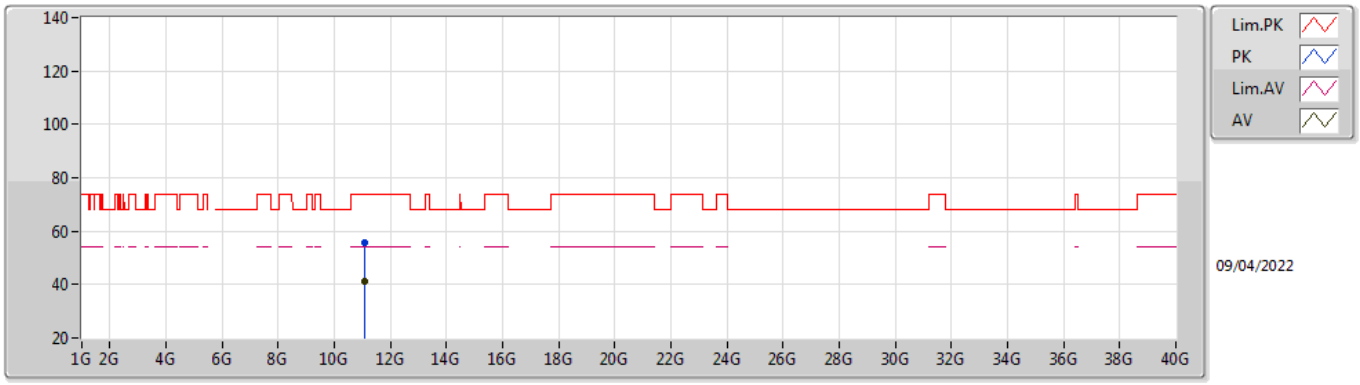


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.09512G	55.49	74.00	-18.51	41.48	3	Horizontal	314	2.13	-	38.50	10.66	35.15
AV	11.0951G	41.34	54.00	-12.66	27.33	3	Horizontal	314	2.13	-	38.50	10.66	35.15

802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TnomVnom

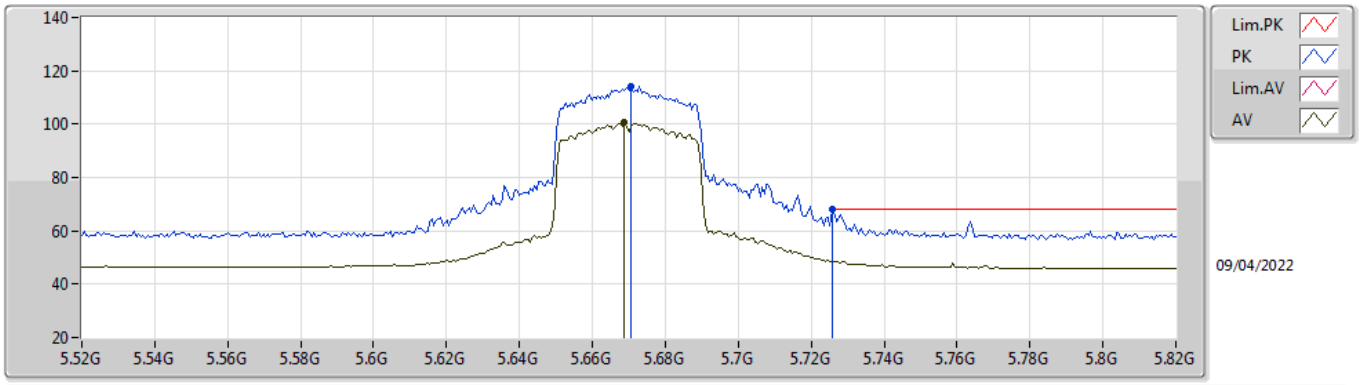


EUT Y_2TX
Setting 14.75
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6706G	114.03	Inf	-Inf	107.65	3	Vertical	0	1.88	-	34.42	7.40	35.44
AV	5.6688G	100.46	Inf	-Inf	94.07	3	Vertical	0	1.88	-	34.42	7.40	35.43
PK	5.7258G	67.94	68.20	-0.26	61.75	3	Vertical	0	1.88	-	34.25	7.40	35.46

802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TnomVnom

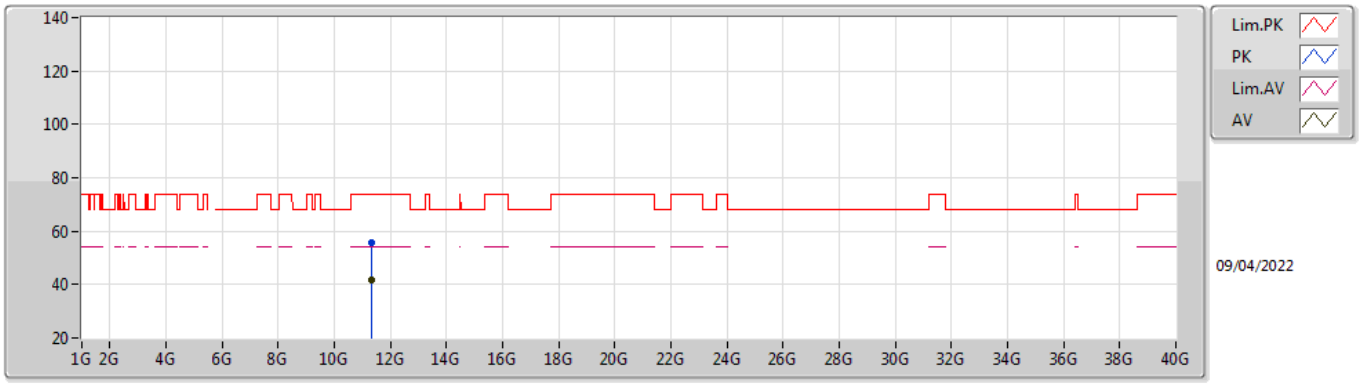


EUT Y_2TX
Setting 14.75
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.335G	55.78	74.00	-18.22	41.77	3	Vertical	110	1.61	-	38.73	10.70	35.42
AV	11.33708G	41.86	54.00	-12.14	27.84	3	Vertical	110	1.61	-	38.74	10.70	35.42

802.11ax HEW40_Nss1,(MCS0)_2TX

5670MHz_TnomVnom

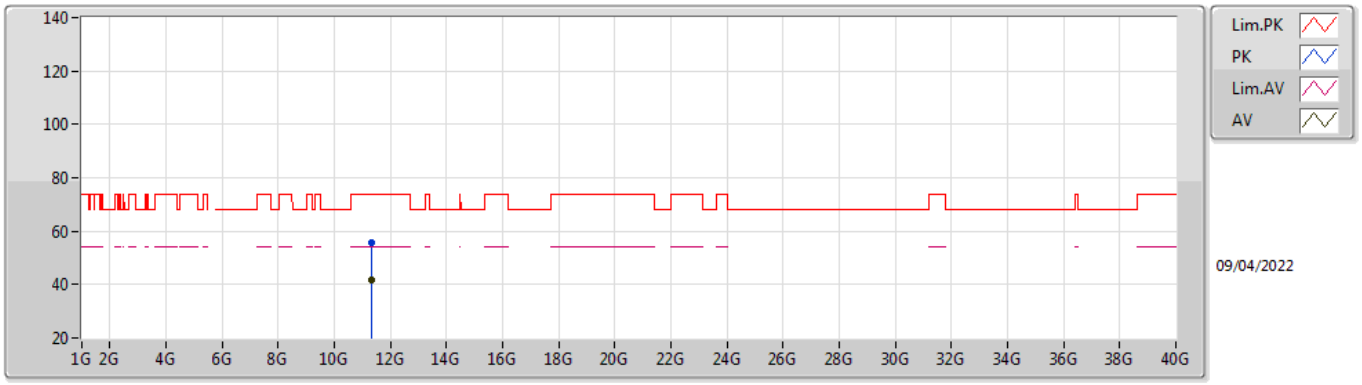


EUT Y_2TX
Setting 14.75
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.33532G	55.92	74.00	-18.08	41.90	3	Horizontal	36	1.85	-	38.74	10.70	35.42
AV	11.33516G	41.89	54.00	-12.11	27.87	3	Horizontal	36	1.85	-	38.74	10.70	35.42

802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

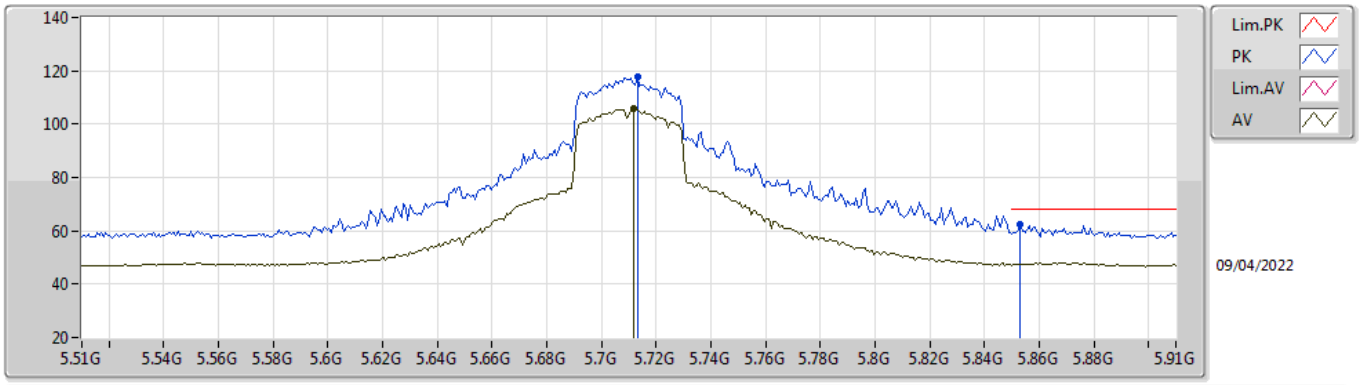


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7132G	117.55	Inf	-Inf	111.34	3	Vertical	0	1.86	-	34.27	7.40	35.46
AV	5.7116G	105.90	Inf	-Inf	99.68	3	Vertical	0	1.86	-	34.28	7.40	35.46
PK	5.8532G	62.42	68.20	-5.78	56.18	3	Vertical	0	1.86	-	34.32	7.45	35.53

802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

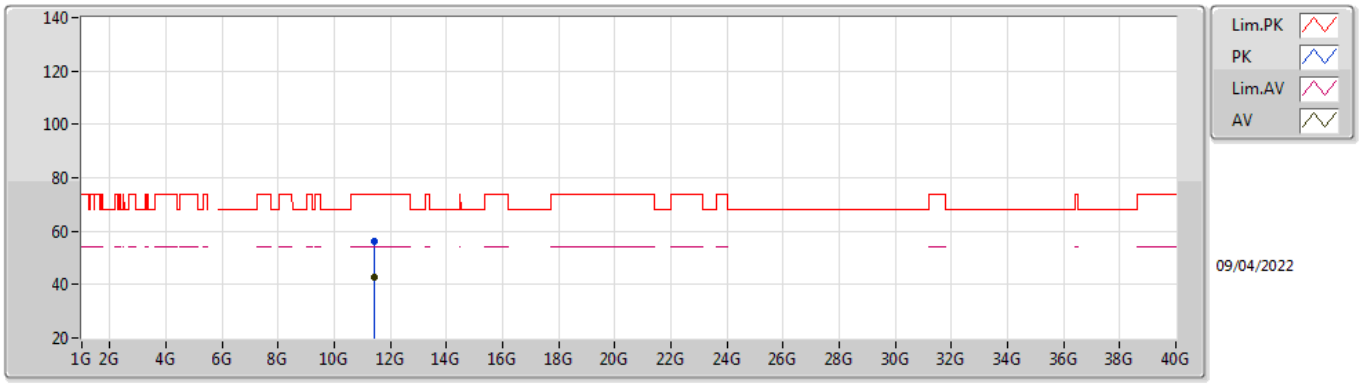


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.42304G	56.21	74.00	-17.79	42.16	3	Vertical	13	2.77	-	38.85	10.71	35.51
AV	11.41524G	42.80	54.00	-11.20	28.77	3	Vertical	13	2.77	-	38.83	10.71	35.51

802.11ax HEW40_Nss1,(MCS0)_2TX

5710MHz Straddle 5.47-5.725GHz_TnomVnom

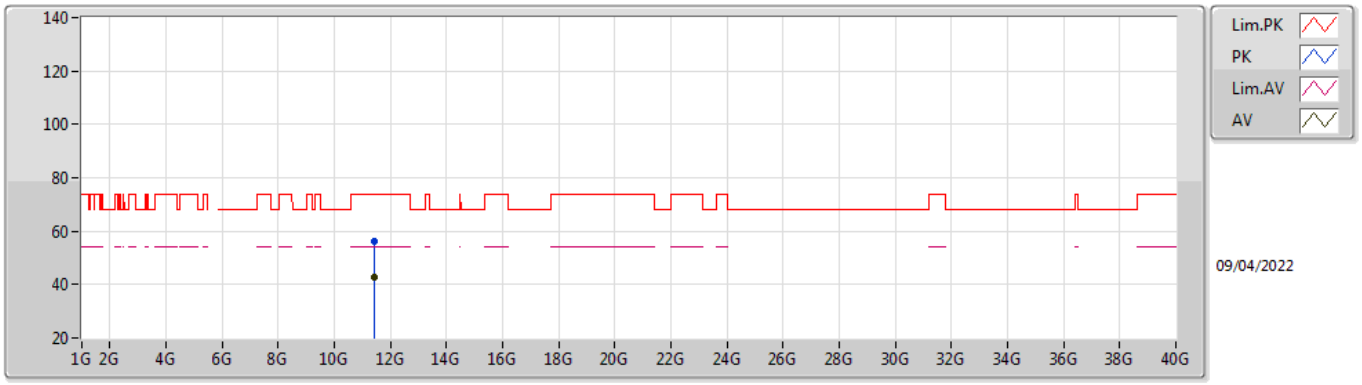


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.41526G	56.31	74.00	-17.69	42.28	3	Horizontal	146	2.75	-	38.83	10.71	35.51
AV	11.42148G	42.79	54.00	-11.21	28.75	3	Horizontal	146	2.75	-	38.84	10.71	35.51

802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TnomVnom

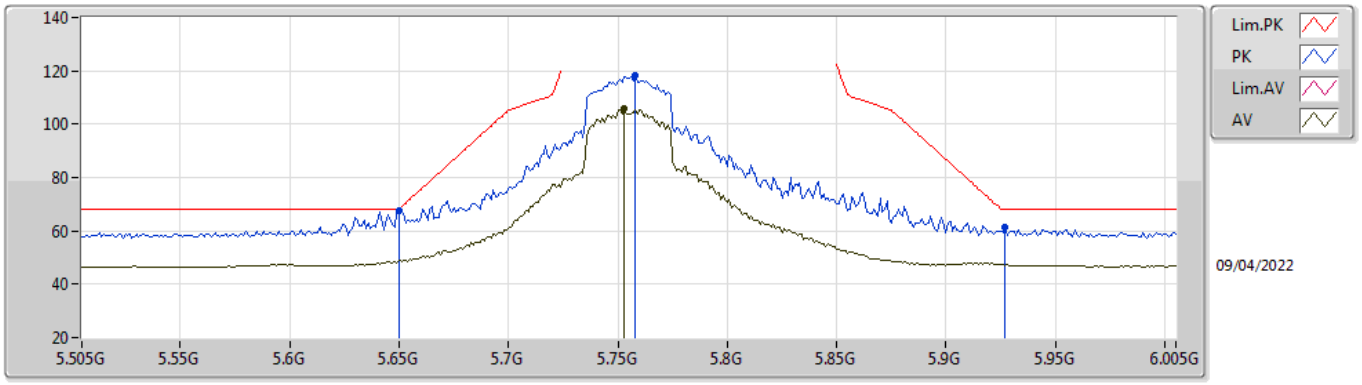


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.65G	67.39	68.20	-0.81	60.92	3	Vertical	0	1.86	-	34.50	7.40	35.43
PK	5.758G	118.29	Inf	-Inf	112.17	3	Vertical	0	1.86	-	34.20	7.40	35.48
AV	5.753G	105.65	Inf	-Inf	99.53	3	Vertical	0	1.86	-	34.20	7.40	35.48
PK	5.927G	61.43	68.20	-6.77	54.75	3	Vertical	0	1.86	-	34.71	7.53	35.56

802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TnomVnom

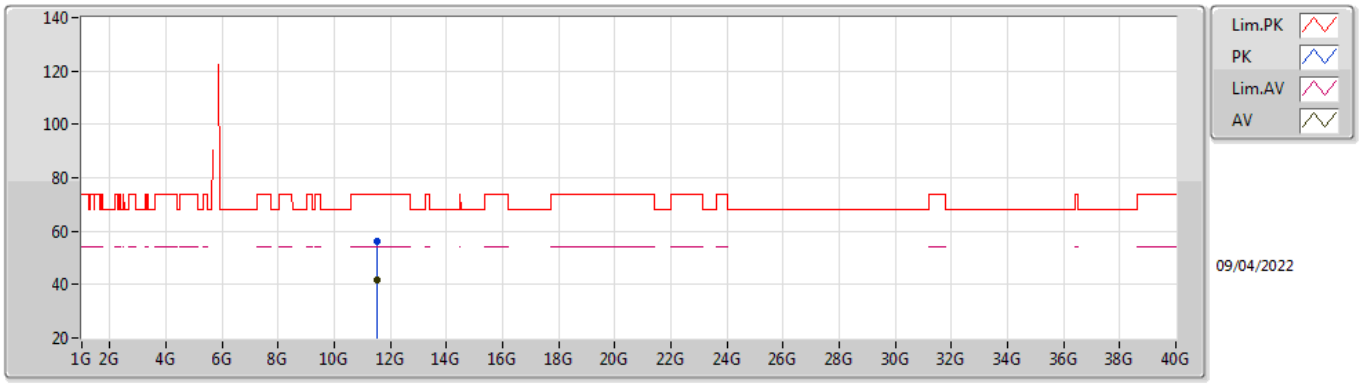


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.511G	56.38	74.00	-17.62	42.21	3	Vertical	193	1.80	-	39.04	10.73	35.60
AV	11.50694G	41.92	54.00	-12.08	27.76	3	Vertical	193	1.80	-	39.03	10.73	35.60

802.11ax HEW40_Nss1,(MCS0)_2TX

5755MHz_TnomVnom

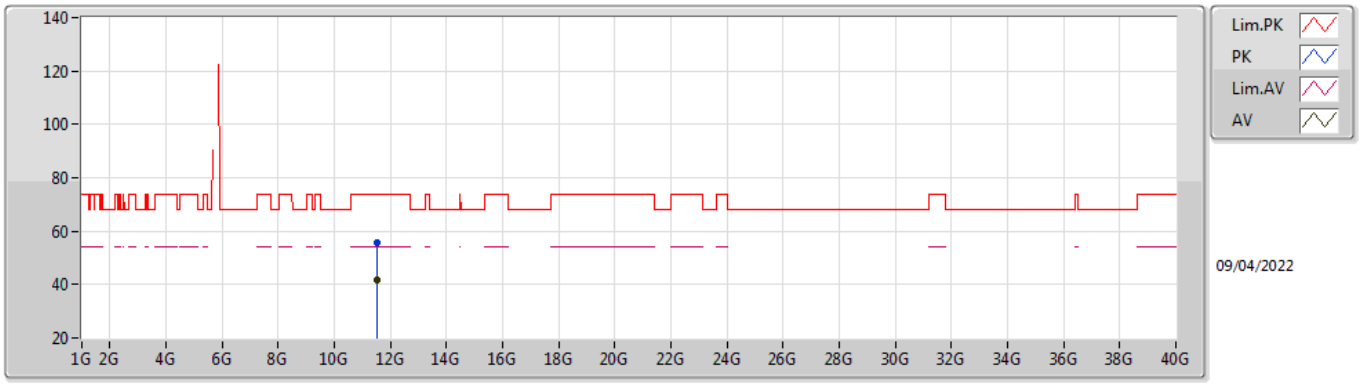


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.51202G	55.81	74.00	-18.19	41.63	3	Horizontal	343	2.48	-	39.05	10.73	35.60
AV	11.5126G	41.86	54.00	-12.14	27.68	3	Horizontal	343	2.48	-	39.05	10.73	35.60

802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TnomVnom

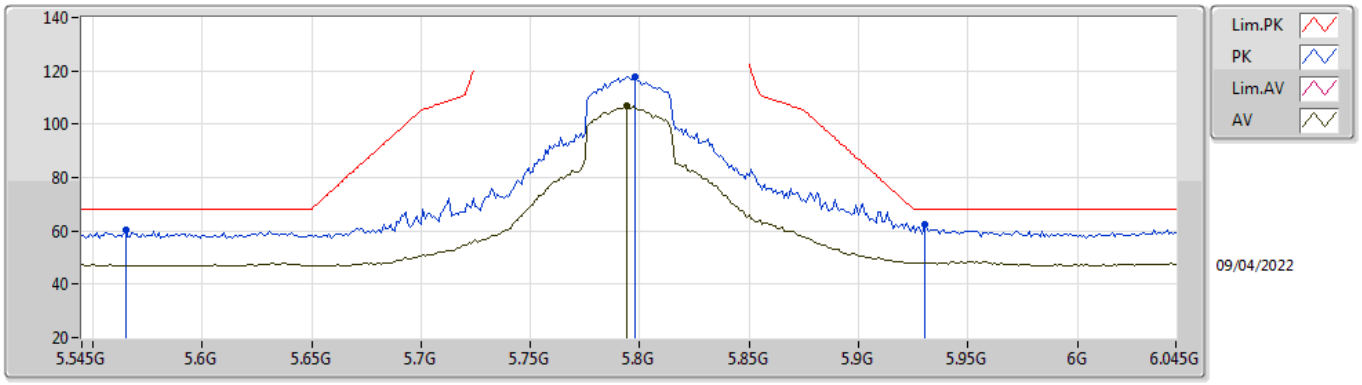


EUT Y_2TX
Setting 21.5
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.565G	60.27	68.20	-7.93	53.68	3	Vertical	1	1.80	-	34.60	7.37	35.38
PK	5.798G	117.83	Inf	-Inf	111.73	3	Vertical	1	1.80	-	34.20	7.40	35.50
AV	5.794G	106.96	Inf	-Inf	100.86	3	Vertical	1	1.80	-	34.20	7.40	35.50
PK	5.93G	62.56	68.20	-5.64	55.87	3	Vertical	1	1.80	-	34.72	7.53	35.56

802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TnomVnom

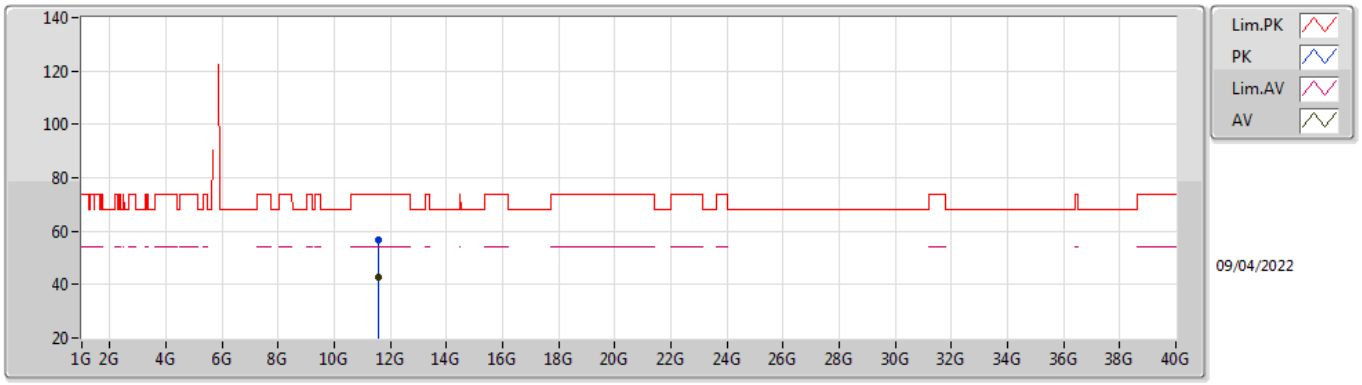


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.58518G	56.65	74.00	-17.35	42.15	3	Vertical	254	1.49	-	39.34	10.74	35.58
AV	11.58522G	42.89	54.00	-11.11	28.39	3	Vertical	254	1.49	-	39.34	10.74	35.58

802.11ax HEW40_Nss1,(MCS0)_2TX

5795MHz_TnomVnom

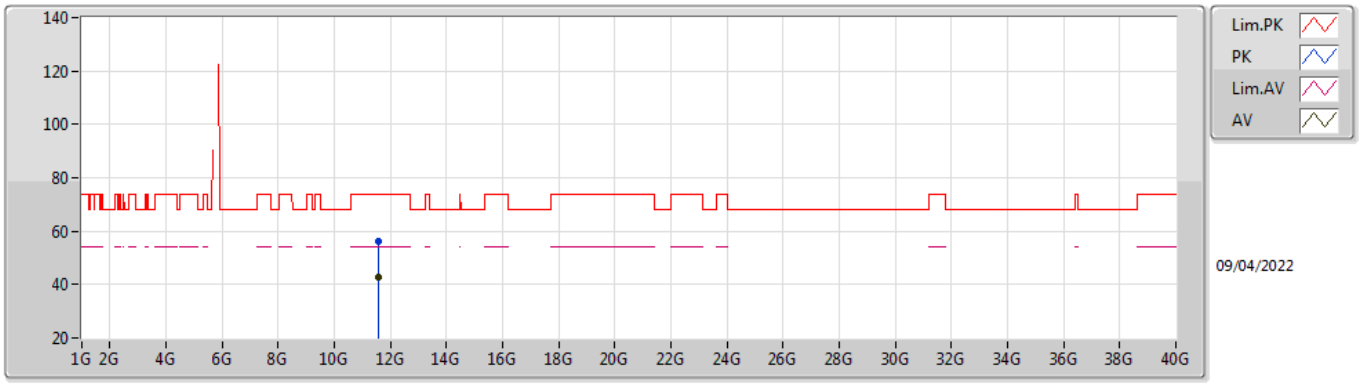


EUT Y_2TX
Setting 21.5
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.589G	56.05	74.00	-17.95	41.53	3	Horizontal	317	2.10	-	39.36	10.74	35.58
AV	11.59072G	42.92	54.00	-11.08	28.40	3	Horizontal	317	2.10	-	39.36	10.74	35.58

802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TnomVnom

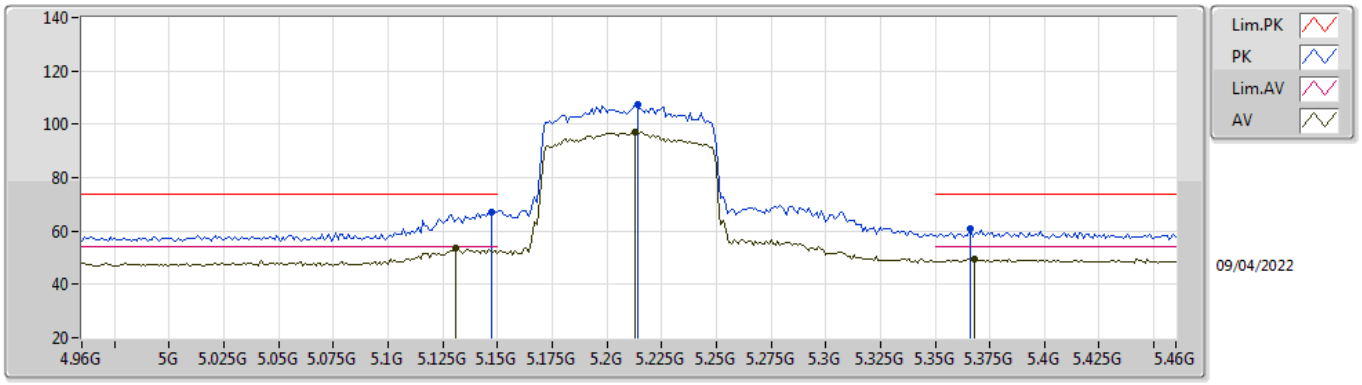


EUT Y_2TX
Setting 13.25
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.147G	67.15	74.00	-6.85	61.33	3	Vertical	357	1.80	-	33.99	7.17	35.34
AV	5.131G	53.87	54.00	-0.13	48.08	3	Vertical	357	1.80	-	33.96	7.17	35.34
PK	5.214G	107.20	Inf	-Inf	101.08	3	Vertical	357	1.80	-	34.26	7.20	35.34
AV	5.213G	97.31	Inf	-Inf	91.20	3	Vertical	357	1.80	-	34.25	7.20	35.34
PK	5.366G	60.86	74.00	-13.14	54.47	3	Vertical	357	1.80	-	34.53	7.20	35.34
AV	5.368G	49.47	54.00	-4.53	43.07	3	Vertical	357	1.80	-	34.54	7.20	35.34

802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TnomVnom

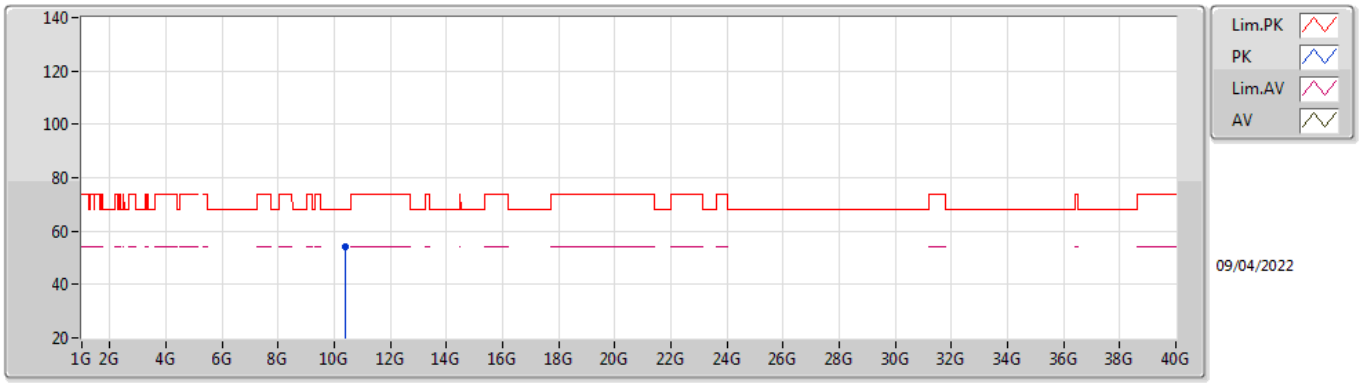


EUT Y_2TX
Setting 13.25
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.41718G	54.10	68.20	-14.10	40.88	3	Vertical	97	2.24	-	38.20	10.56	35.54

802.11ax HEW80_Nss1,(MCS0)_2TX

5210MHz_TnomVnom

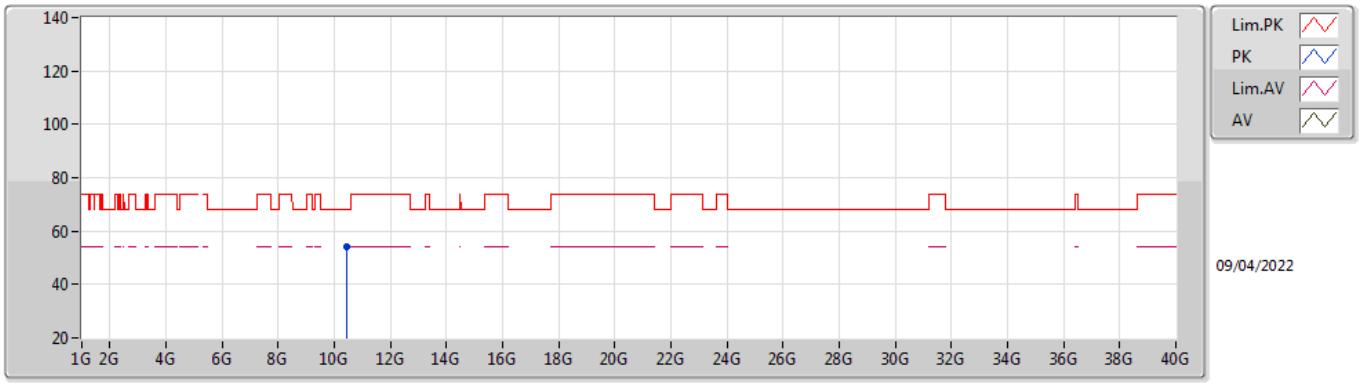


EUT Y_2TX
Setting 13.25
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.4232G	54.37	68.20	-13.83	41.14	3	Horizontal	238	2.24	-	38.20	10.56	35.53

802.11ax HEW80_Nss1,(MCS0)_2TX

5290MHz_TnomVnom

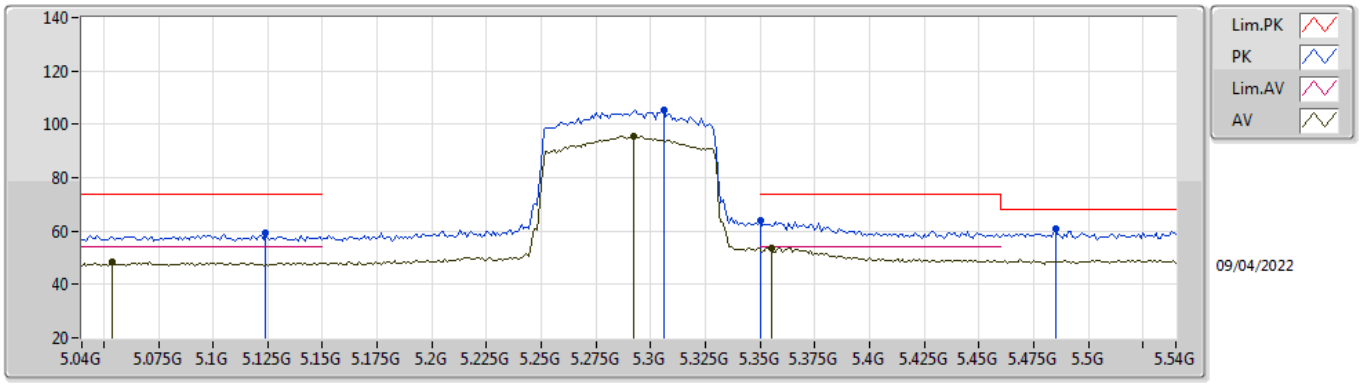


EUT Y_2TX
Setting 11
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.124G	59.07	74.00	-14.93	53.29	3	Vertical	357	1.80	-	33.95	7.16	35.33
AV	5.054G	48.50	54.00	-5.50	42.89	3	Vertical	357	1.80	-	33.81	7.13	35.33
PK	5.306G	105.58	Inf	-Inf	99.22	3	Vertical	357	1.80	-	34.50	7.20	35.34
AV	5.292G	95.68	Inf	-Inf	89.34	3	Vertical	357	1.80	-	34.48	7.20	35.34
PK	5.35G	63.75	74.00	-10.25	57.39	3	Vertical	357	1.80	-	34.50	7.20	35.34
AV	5.355G	53.85	54.00	-0.15	47.48	3	Vertical	357	1.80	-	34.51	7.20	35.34
PK	5.485G	60.64	68.20	-7.56	54.13	3	Vertical	357	1.80	-	34.57	7.29	35.35

802.11ax HEW80_Nss1,(MCS0)_2TX

5290MHz_TnomVnom

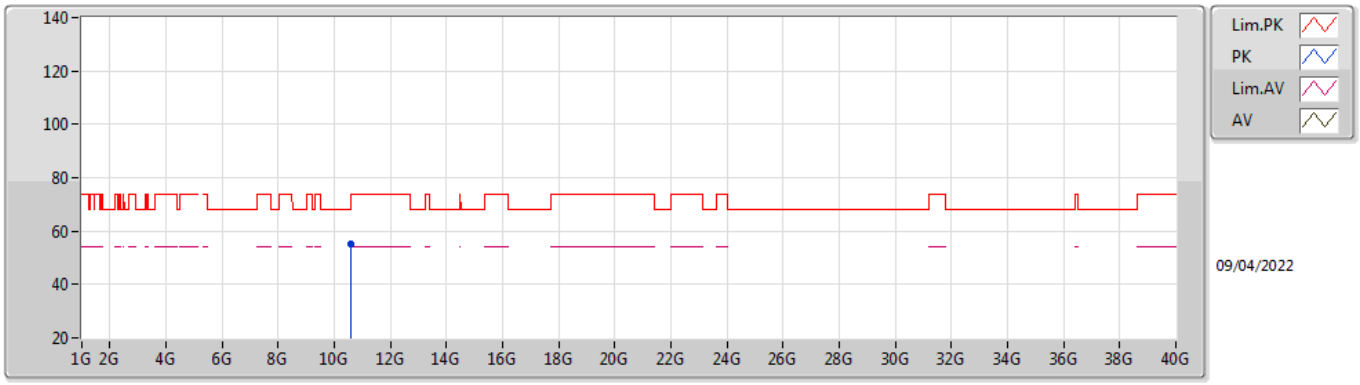


EUT Y_2TX
Setting 11
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.5803G	54.97	68.20	-13.23	41.58	3	Vertical	224	1.90	-	38.20	10.59	35.40

802.11ax HEW80_Nss1,(MCS0)_2TX

5290MHz_TnomVnom

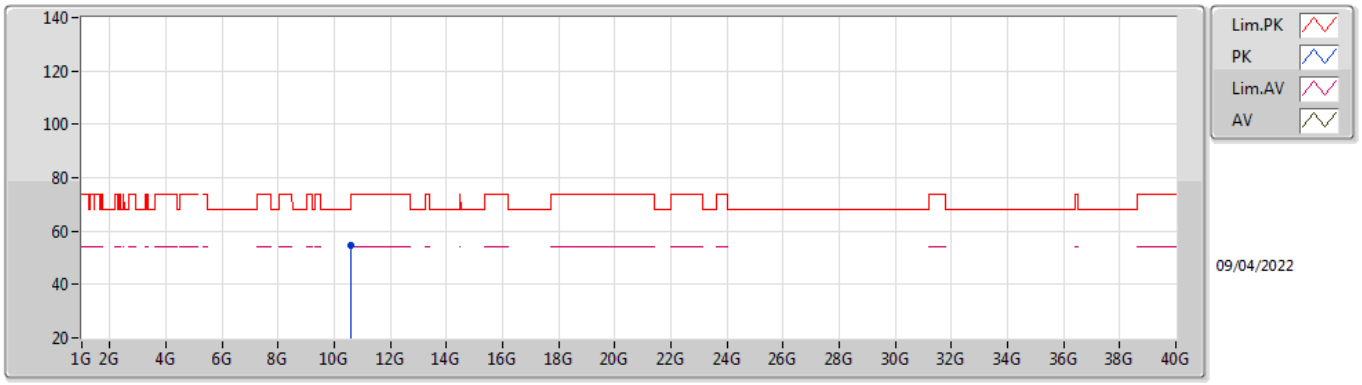


EUT Y_2TX
Setting 11
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.5785G	54.85	68.20	-13.35	41.46	3	Horizontal	212	2.68	-	38.20	10.59	35.40

802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TnomVnom

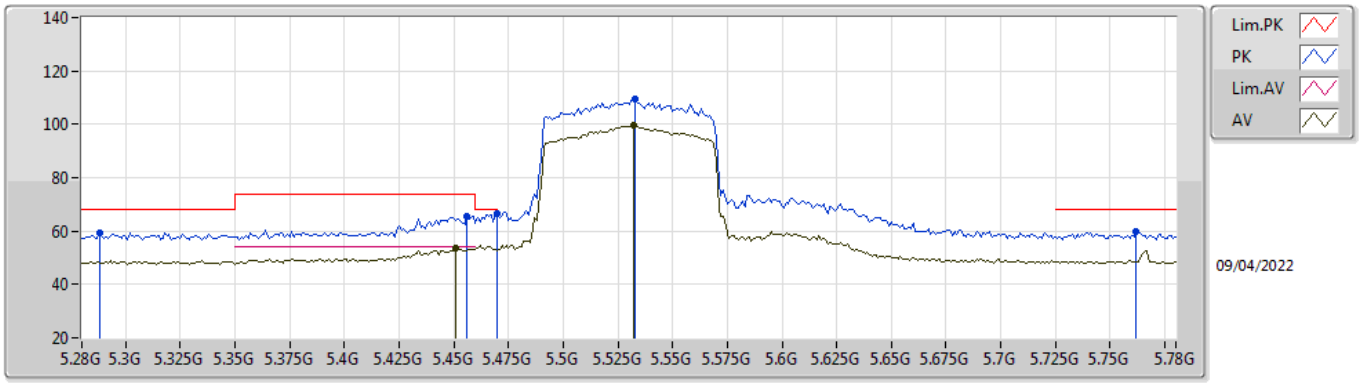


EUT Y_2TX
Setting 13.75
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.288G	59.54	68.20	-8.66	53.20	3	Vertical	1	1.87	-	34.48	7.20	35.34
PK	5.456G	65.41	74.00	-8.59	58.99	3	Vertical	1	1.87	-	34.51	7.26	35.35
AV	5.451G	53.85	54.00	-0.15	47.45	3	Vertical	1	1.87	-	34.50	7.25	35.35
PK	5.47G	66.79	68.20	-1.41	60.33	3	Vertical	1	1.87	-	34.54	7.27	35.35
PK	5.533G	109.33	Inf	-Inf	102.77	3	Vertical	1	1.87	-	34.60	7.33	35.37
AV	5.532G	99.62	Inf	-Inf	93.06	3	Vertical	1	1.87	-	34.60	7.33	35.37
PK	5.762G	59.62	68.20	-8.58	53.50	3	Vertical	1	1.87	-	34.20	7.40	35.48

802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TnomVnom

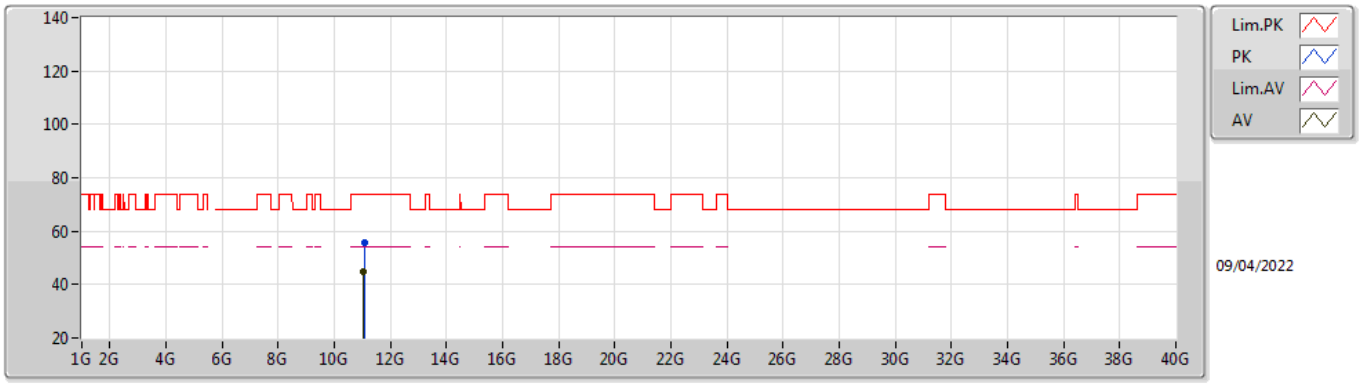


EUT Y_2TX
Setting 13.75
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.05784G	55.92	74.00	-18.08	41.90	3	Vertical	228	2.89	-	38.46	10.66	35.10
AV	11.05692G	44.84	54.00	-9.16	30.82	3	Vertical	228	2.89	-	38.46	10.66	35.10

802.11ax HEW80_Nss1,(MCS0)_2TX

5530MHz_TnomVnom

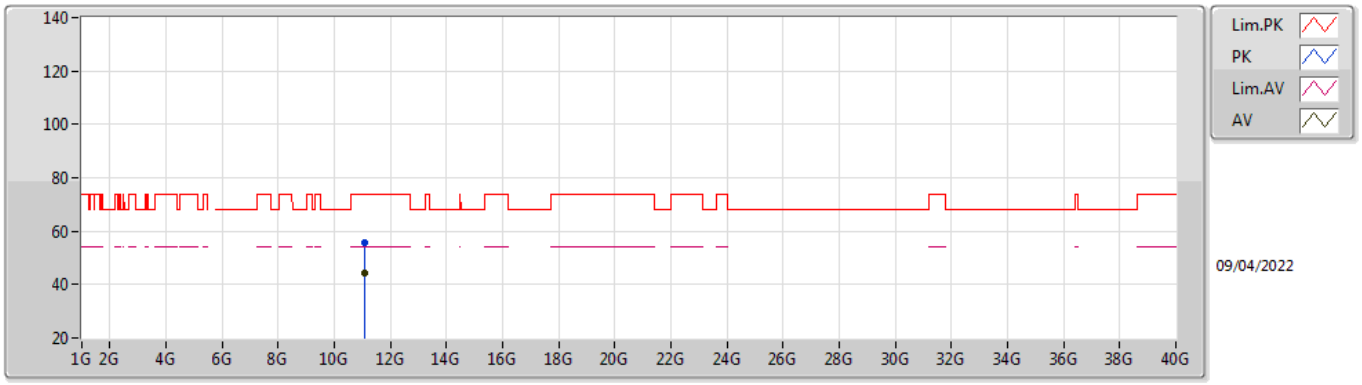


EUT Y_2TX
Setting 13.75
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.05968G	55.57	74.00	-18.43	41.56	3	Horizontal	285	2.19	-	38.46	10.66	35.11
AV	11.06476G	44.51	54.00	-9.49	30.50	3	Horizontal	285	2.19	-	38.46	10.66	35.11

802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TnomVnom

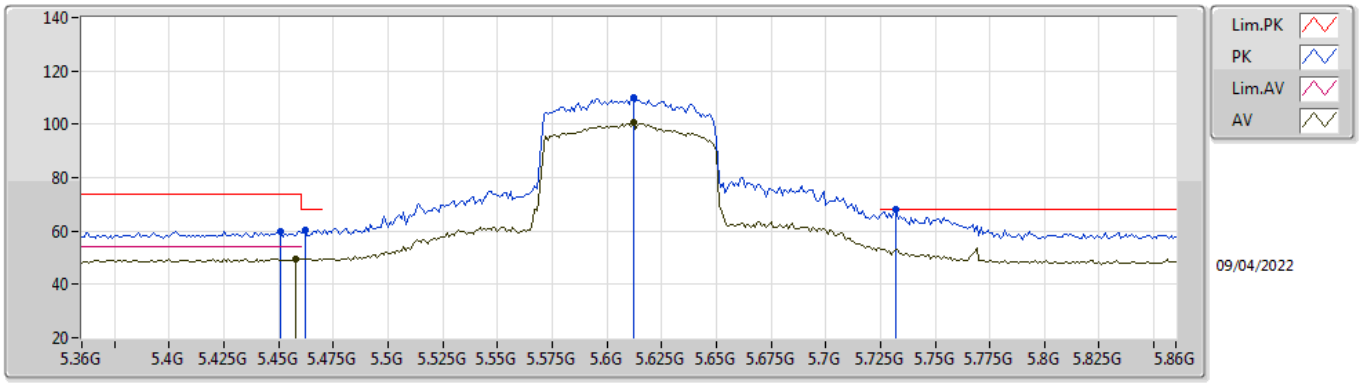


EUT Y_2TX
Setting 15
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.451G	60.00	74.00	-14.00	53.60	3	Vertical	5	1.80	-	34.50	7.25	35.35
PK	5.462G	60.17	68.20	-8.03	53.74	3	Vertical	5	1.80	-	34.52	7.26	35.35
AV	5.458G	49.48	54.00	-4.52	43.05	3	Vertical	5	1.80	-	34.52	7.26	35.35
PK	5.612G	109.78	Inf	-Inf	103.21	3	Vertical	5	1.80	-	34.58	7.40	35.41
AV	5.612G	100.46	Inf	-Inf	93.89	3	Vertical	5	1.80	-	34.58	7.40	35.41
PK	5.732G	67.92	68.20	-0.28	61.75	3	Vertical	5	1.80	-	34.24	7.40	35.47

802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TnomVnom

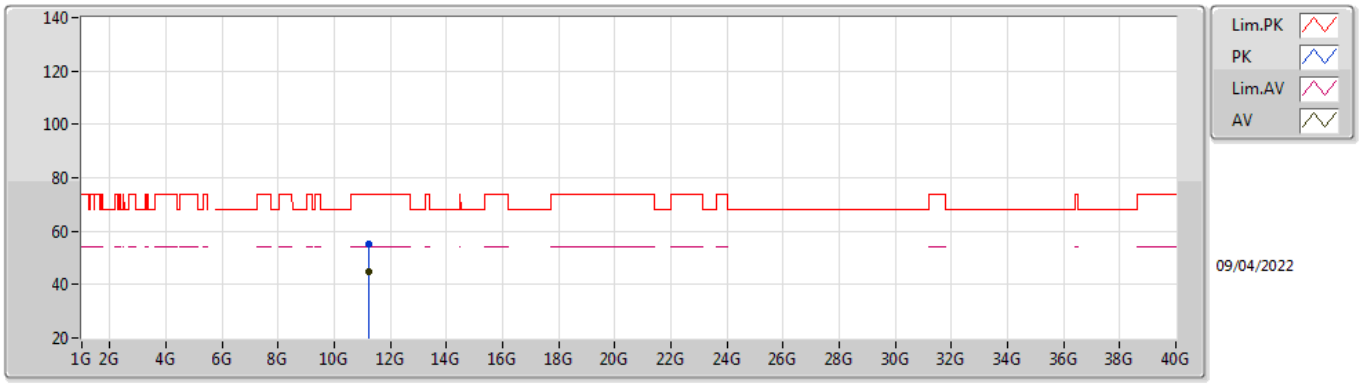


EUT Y_2TX
Setting 15
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.2179G	55.04	74.00	-18.96	41.02	3	Vertical	67	2.50	-	38.62	10.68	35.28
AV	11.21578G	44.62	54.00	-9.38	30.60	3	Vertical	67	2.50	-	38.62	10.68	35.28

802.11ax HEW80_Nss1,(MCS0)_2TX

5610MHz_TnomVnom

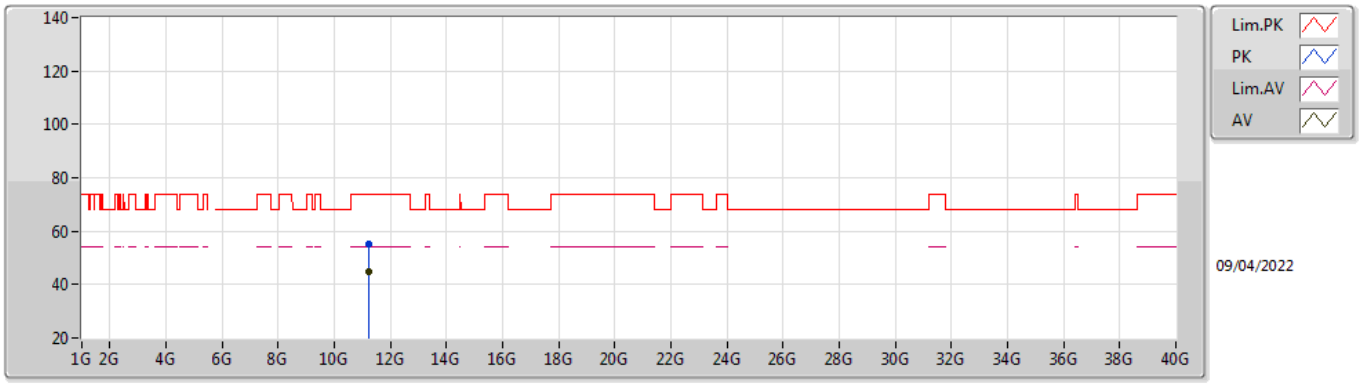


EUT Y_2TX
Setting 15
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.21568G	55.07	74.00	-18.93	41.05	3	Horizontal	99	1.10	-	38.62	10.68	35.28
AV	11.22306G	44.75	54.00	-9.25	30.74	3	Horizontal	99	1.10	-	38.62	10.68	35.29

802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

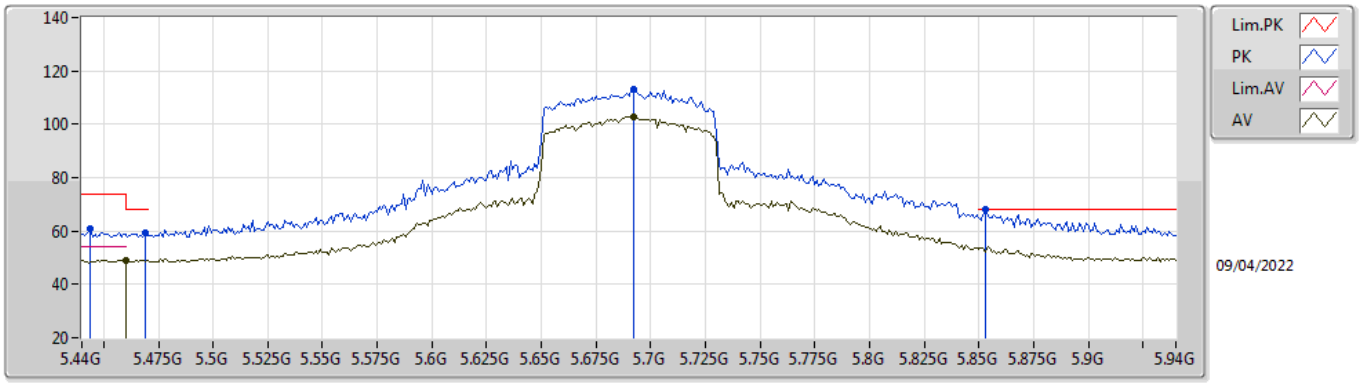


EUT Y_2TX
Setting 17
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.444G	60.82	74.00	-13.18	54.42	3	Vertical	360	1.92	-	34.51	7.24	35.35
PK	5.469G	59.11	68.20	-9.09	52.65	3	Vertical	360	1.92	-	34.54	7.27	35.35
AV	5.46G	49.15	54.00	-4.85	42.72	3	Vertical	360	1.92	-	34.52	7.26	35.35
PK	5.692G	112.85	Inf	-Inf	106.57	3	Vertical	360	1.92	-	34.33	7.40	35.45
AV	5.692G	102.66	Inf	-Inf	96.38	3	Vertical	360	1.92	-	34.33	7.40	35.45
PK	5.853G	67.98	68.20	-0.22	61.74	3	Vertical	360	1.92	-	34.32	7.45	35.53

802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

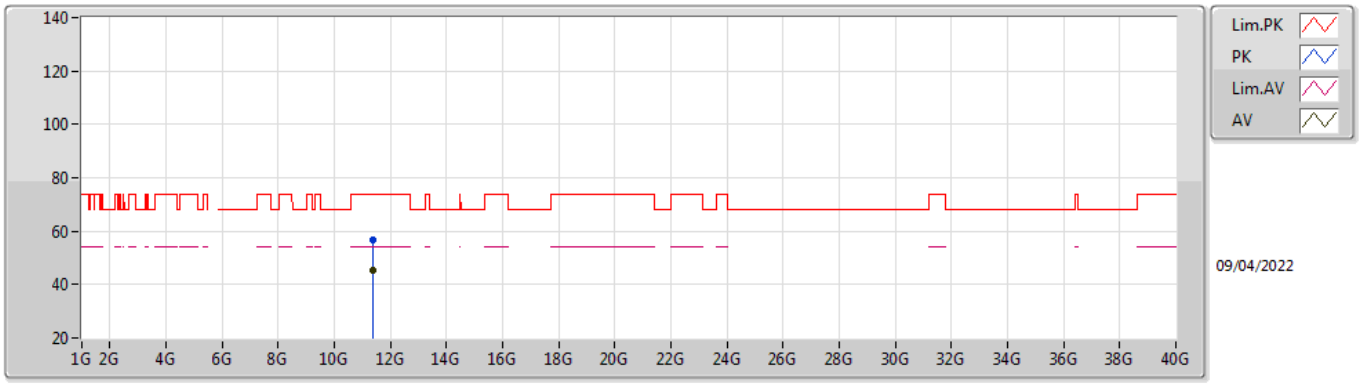


EUT Y_2TX
Setting 17
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.38034G	56.59	74.00	-17.41	42.57	3	Vertical	117	1.53	-	38.78	10.71	35.47
AV	11.38112G	45.50	54.00	-8.50	31.48	3	Vertical	117	1.53	-	38.78	10.71	35.47

802.11ax HEW80_Nss1,(MCS0)_2TX

5690MHz Straddle 5.47-5.725GHz_TnomVnom

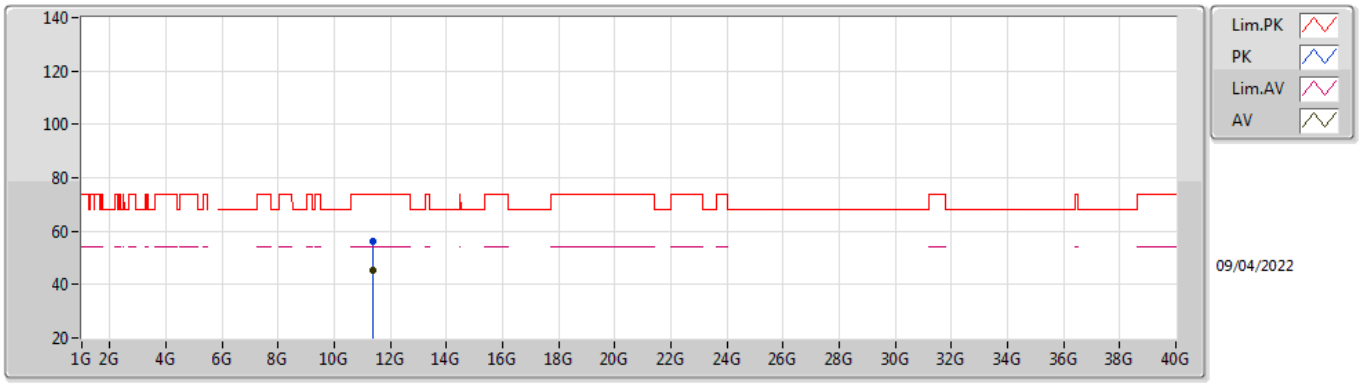


EUT Y_2TX
Setting 17
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.37928G	56.17	74.00	-17.83	42.14	3	Horizontal	325	1.80	-	38.78	10.71	35.46
AV	11.38036G	45.55	54.00	-8.45	31.53	3	Horizontal	325	1.80	-	38.78	10.71	35.47

802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TnomVnom

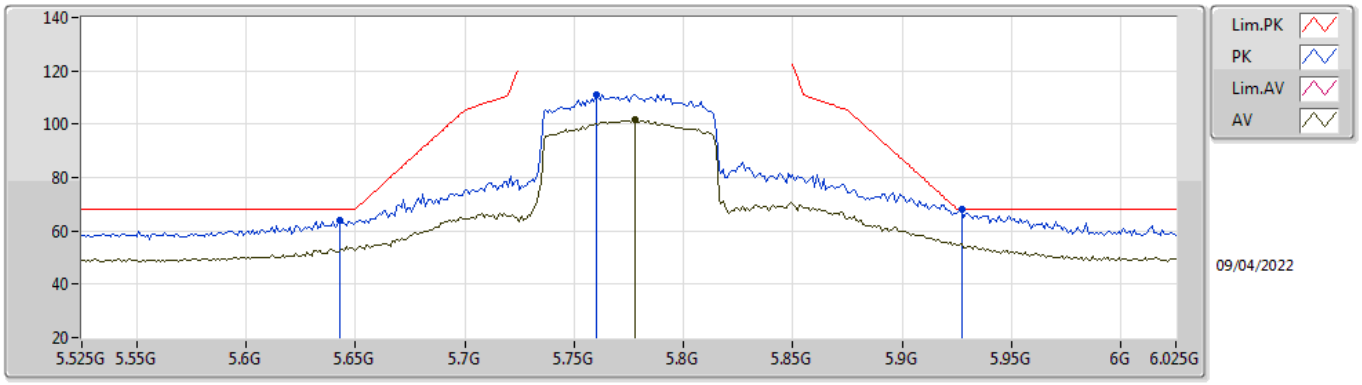


EUT Y_2TX
Setting 15.75
03-C-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.643G	64.18	68.20	-4.02	57.69	3	Vertical	0	1.80	-	34.51	7.40	35.42
PK	5.76G	111.17	Inf	-Inf	105.05	3	Vertical	0	1.80	-	34.20	7.40	35.48
AV	5.778G	101.48	Inf	-Inf	95.37	3	Vertical	0	1.80	-	34.20	7.40	35.49
PK	5.927G	67.99	68.20	-0.21	61.31	3	Vertical	0	1.80	-	34.71	7.53	35.56

802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TnomVnom

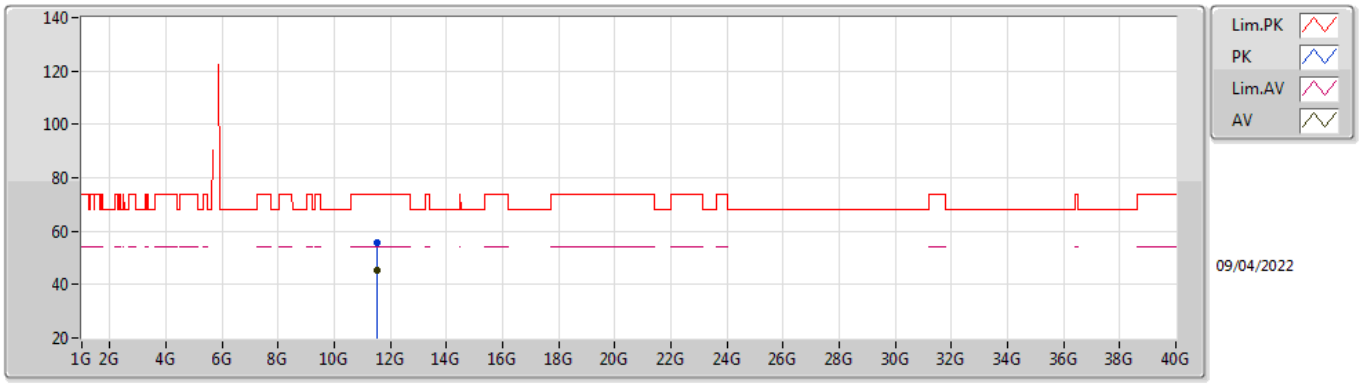


EUT Y_2TX
Setting 15.75
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.54606G	55.91	74.00	-18.09	41.59	3	Vertical	125	1.12	-	39.18	10.73	35.59
AV	11.54784G	45.33	54.00	-8.67	31.00	3	Vertical	125	1.12	-	39.19	10.73	35.59

802.11ax HEW80_Nss1,(MCS0)_2TX

5775MHz_TnomVnom

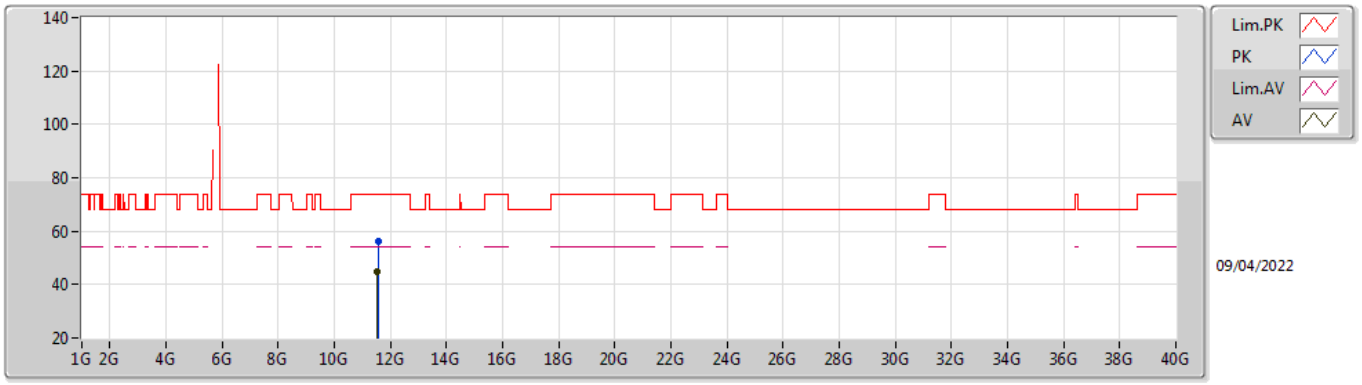


EUT Y_2TX
Setting 15.75
03-C-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.55288G	56.07	74.00	-17.93	41.72	3	Horizontal	24	2.80	-	39.21	10.73	35.59
AV	11.54578G	44.96	54.00	-9.04	30.64	3	Horizontal	24	2.80	-	39.18	10.73	35.59

802.11ax HEW160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

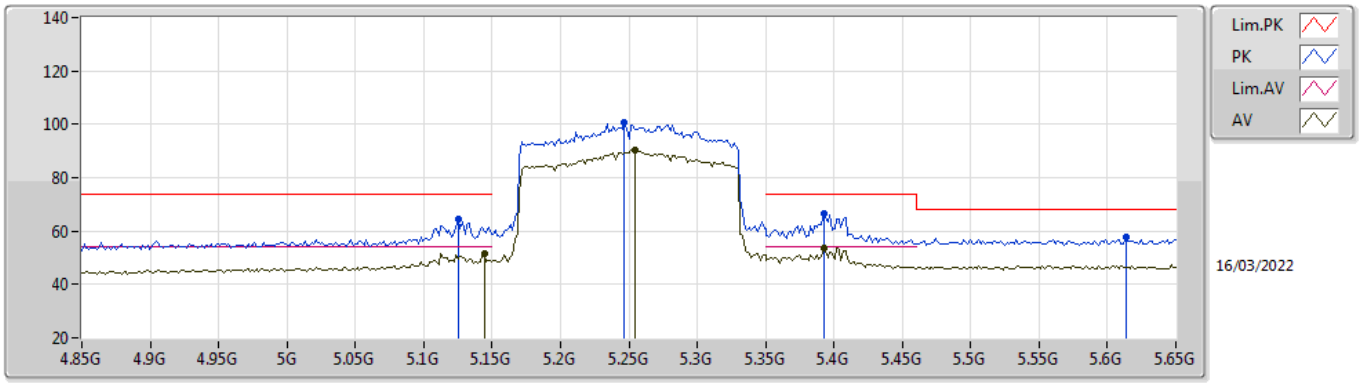


EUT Y_2TX
Setting 8.75
02-B-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1252G	64.55	74.00	-9.45	57.97	3	Vertical	78	1.80	-	33.50	5.23	32.15
AV	5.1444G	51.60	54.00	-2.40	45.01	3	Vertical	78	1.80	-	33.50	5.24	32.15
PK	5.2468G	100.55	Inf	-Inf	93.79	3	Vertical	78	1.80	-	33.59	5.32	32.15
AV	5.2548G	90.60	Inf	-Inf	83.80	3	Vertical	78	1.80	-	33.61	5.33	32.14
PK	5.3924G	66.55	74.00	-7.45	59.51	3	Vertical	78	1.80	-	33.78	5.40	32.14
AV	5.3924G	53.51	54.00	-0.49	46.47	3	Vertical	78	1.80	-	33.78	5.40	32.14
PK	5.6132G	57.51	68.20	-10.69	50.18	3	Vertical	78	1.80	-	33.87	5.60	32.14

802.11ax HEW160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

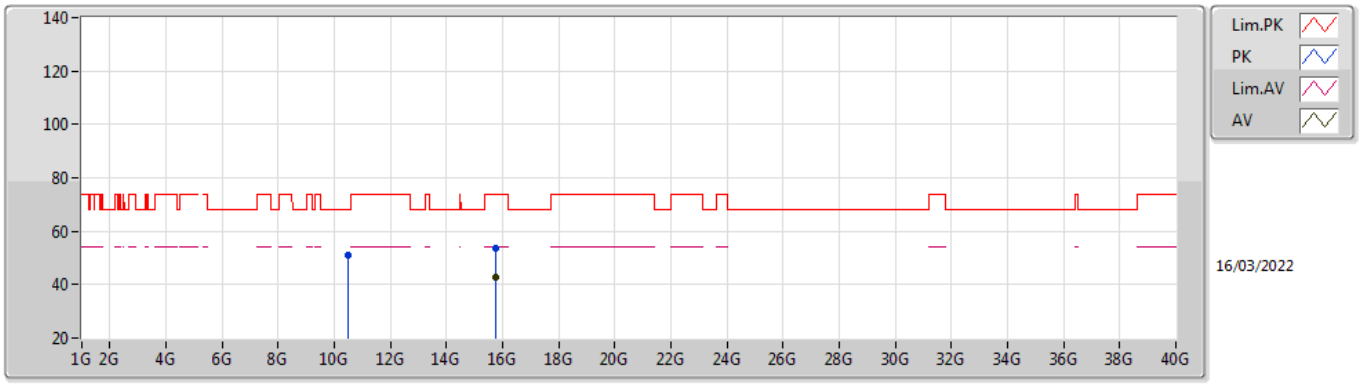


EUT Y_2TX
Setting 8.75
02-B-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.5104G	50.89	68.20	-17.31	38.03	3	Vertical	30	1.34	-	38.41	7.50	33.05
PK	15.73336G	53.66	74.00	-20.34	39.81	3	Vertical	303	2.93	-	37.40	9.88	33.43
AV	15.73032G	42.75	54.00	-11.25	28.89	3	Vertical	303	2.93	-	37.40	9.88	33.42

802.11ax HEW160_Nss1,(MCS0)_2TX

5250MHz Straddle 5.25-5.35GHz_TnomVnom

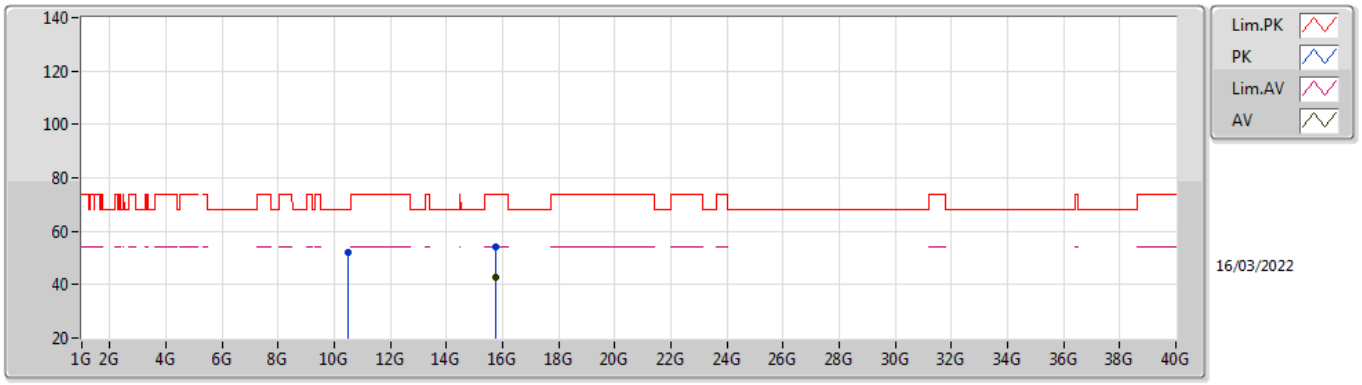


EUT Y_2TX
Setting 8.75
02-B-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.48424G	51.92	68.20	-16.28	39.07	3	Horizontal	152	2.58	-	38.40	7.49	33.04
PK	15.74776G	53.89	74.00	-20.11	40.04	3	Horizontal	219	2.31	-	37.40	9.89	33.44
AV	15.75848G	42.64	54.00	-11.36	28.81	3	Horizontal	219	2.31	-	37.40	9.89	33.46

802.11ax HEW160_Nss1,(MCS0)_2TX

5570MHz_TnomVnom

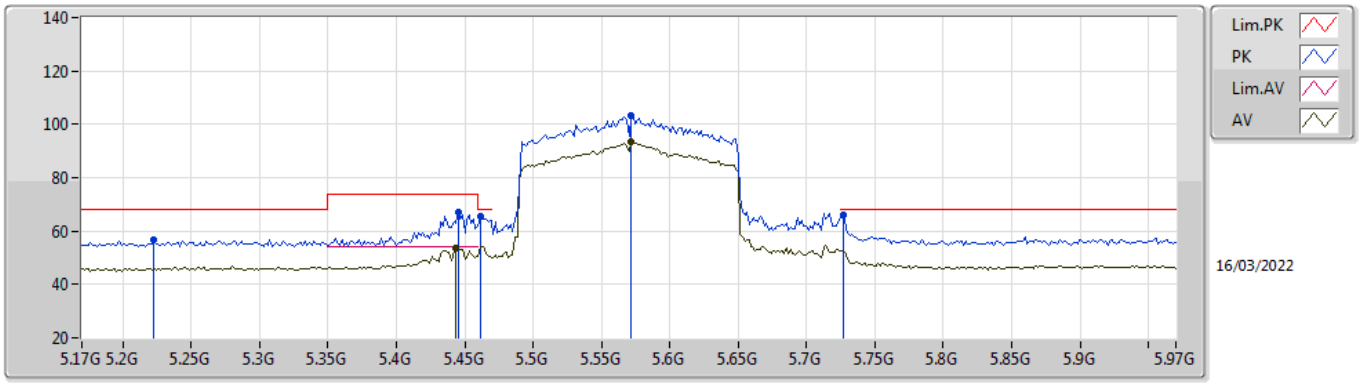


EUT Y_2TX
Setting 9.5
02-B-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.2228G	56.97	68.20	-11.23	50.26	3	Vertical	82	1.73	-	33.55	5.31	32.15
PK	5.4452G	67.03	74.00	-6.97	59.82	3	Vertical	82	1.73	-	33.89	5.45	32.13
AV	5.4436G	53.82	54.00	-0.18	46.62	3	Vertical	82	1.73	-	33.89	5.44	32.13
PK	5.4612G	65.74	68.20	-2.46	58.51	3	Vertical	82	1.73	-	33.90	5.46	32.13
PK	5.5716G	103.22	Inf	-Inf	95.88	3	Vertical	82	1.73	-	33.90	5.57	32.13
AV	5.5716G	93.22	Inf	-Inf	85.88	3	Vertical	82	1.73	-	33.90	5.57	32.13
PK	5.7268G	66.09	68.20	-2.11	58.88	3	Vertical	82	1.73	-	33.75	5.60	32.14

802.11ax HEW160_Nss1,(MCS0)_2TX

5570MHz_TnomVnom

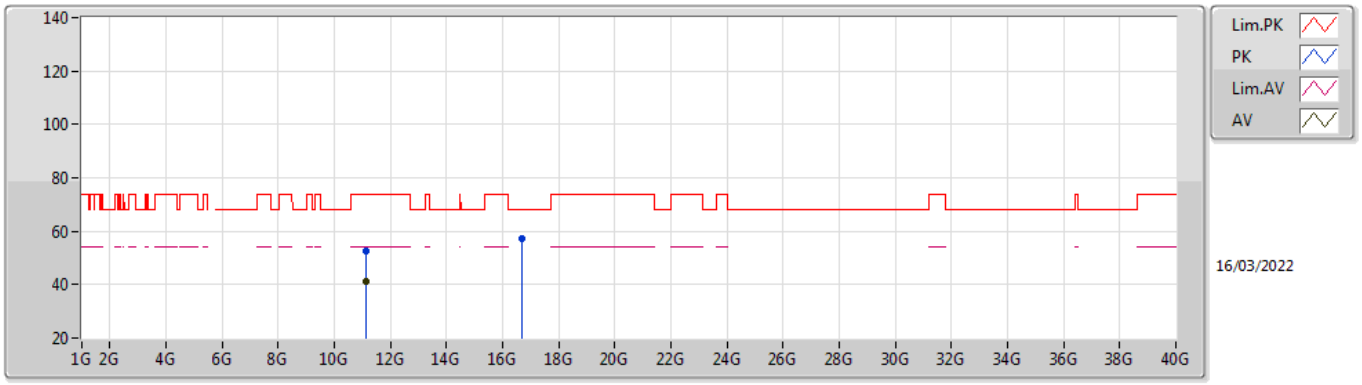


EUT Y_2TX
Setting 9.5
02-B-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.13256G	52.37	74.00	-21.63	39.25	3	Vertical	315	2.53	-	38.63	7.75	33.26
AV	11.12152G	40.95	54.00	-13.05	27.84	3	Vertical	315	2.53	-	38.62	7.75	33.26
PK	16.69336G	57.19	68.20	-11.01	40.40	3	Vertical	36	1.14	-	39.69	10.35	33.25

802.11ax HEW160_Nss1,(MCS0)_2TX

5570MHz_TnomVnom

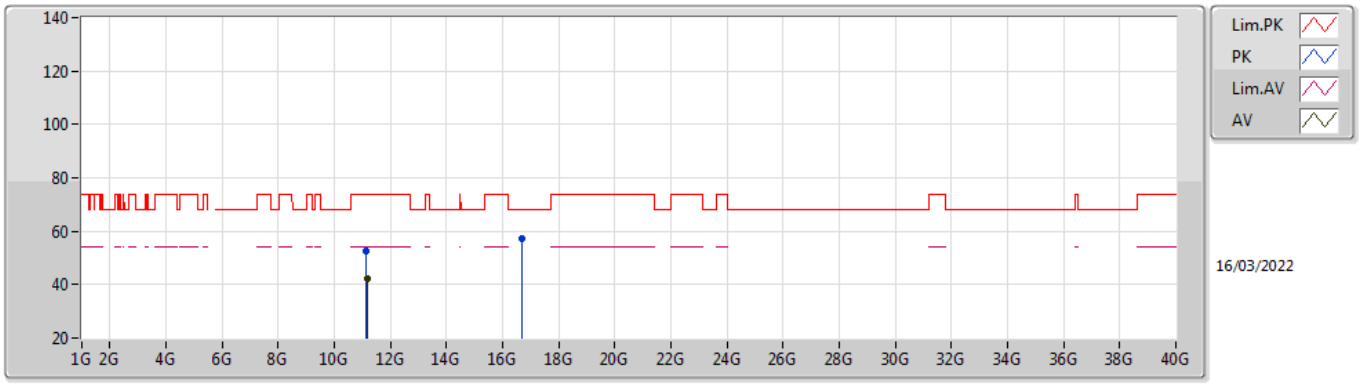

EUT Y_2TX
Setting 9.5
02-B-R-5


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.12408G	52.80	74.00	-21.20	39.69	3	Horizontal	153	2.04	-	38.62	7.75	33.26
AV	11.1588G	42.10	54.00	-11.90	28.93	3	Horizontal	153	2.04	-	38.66	7.76	33.25
PK	16.71136G	57.30	68.20	-10.90	40.44	3	Horizontal	64	1.35	-	39.77	10.36	33.27

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	PK	5.7274G	68.03	68.20	-0.17	3	Vertical	320	1.90	-

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

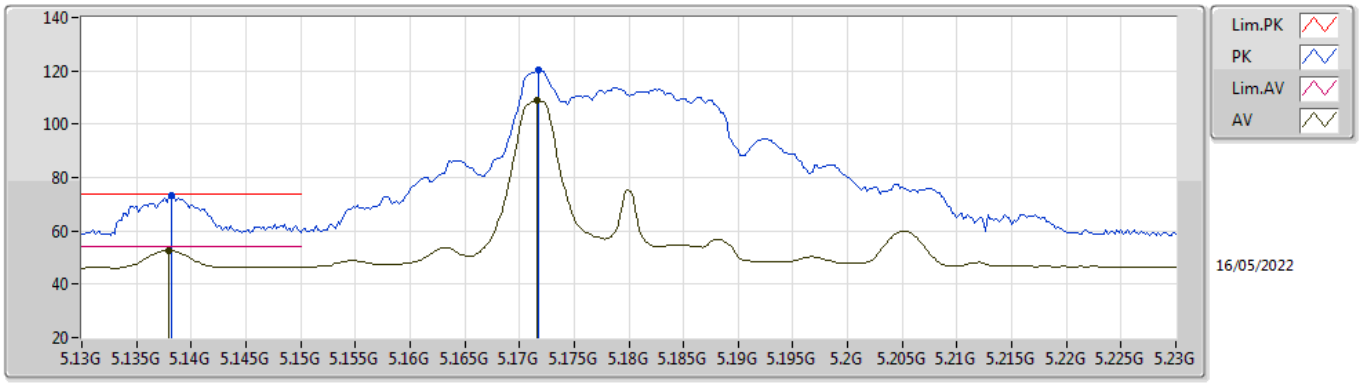


EUT X_1TX
Setting 20.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1382G	73.37	74.00	-0.63	67.56	3	Vertical	65	1.88	-	33.98	7.17	35.34
AV	5.138G	52.76	54.00	-1.24	46.95	3	Vertical	65	1.88	-	33.98	7.17	35.34
PK	5.1718G	120.19	Inf	-Inf	114.25	3	Vertical	65	1.88	-	34.09	7.19	35.34
AV	5.1716G	108.71	Inf	-Inf	102.77	3	Vertical	65	1.88	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

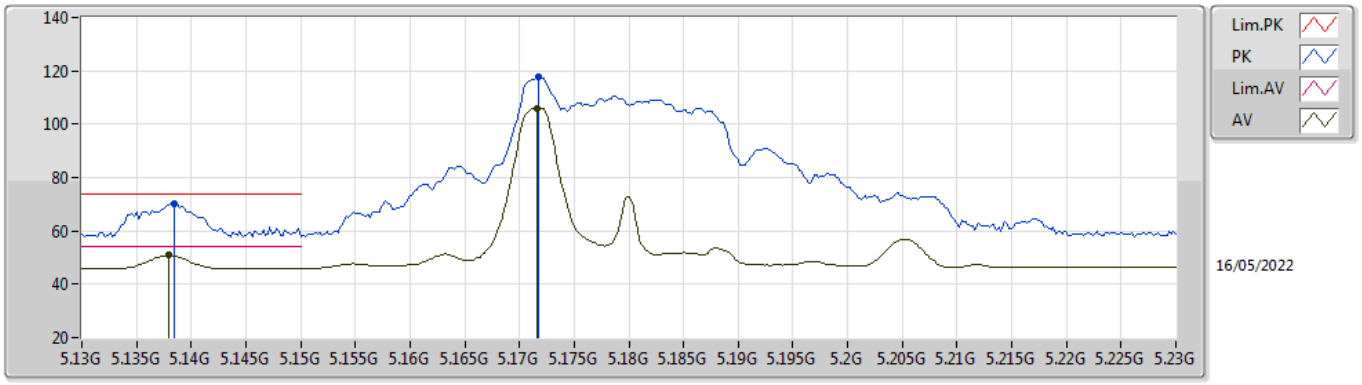


EUT X_1TX
Setting 20.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1384G	70.40	74.00	-3.60	64.59	3	Horizontal	162	1.94	-	33.98	7.17	35.34
AV	5.138G	50.81	54.00	-3.19	45.00	3	Horizontal	162	1.94	-	33.98	7.17	35.34
PK	5.1718G	117.56	Inf	-Inf	111.62	3	Horizontal	162	1.94	-	34.09	7.19	35.34
AV	5.1716G	106.00	Inf	-Inf	100.06	3	Horizontal	162	1.94	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

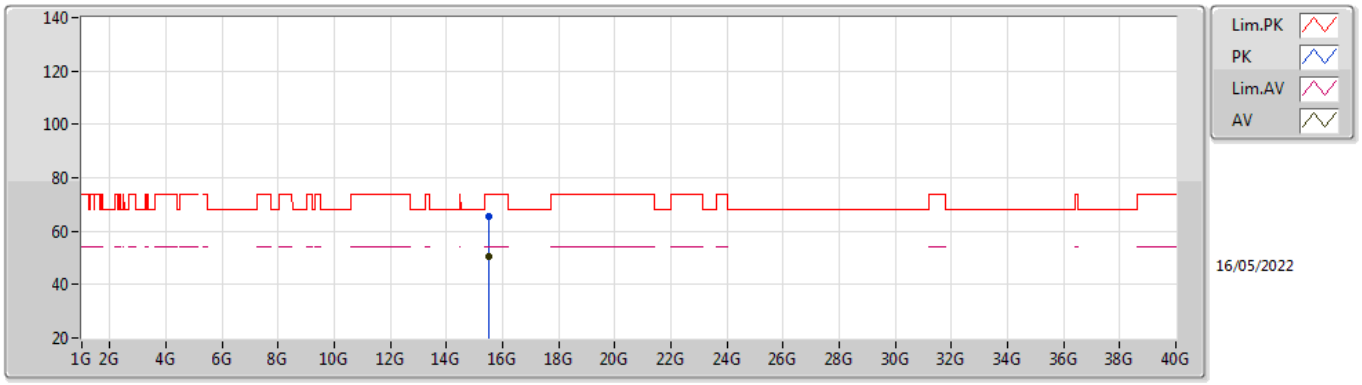


EUT X_1TX
Setting 20.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.515G	65.26	74.00	-8.74	48.89	3	Vertical	287	1.80	-	38.59	13.16	35.38
AV	15.5142G	50.70	54.00	-3.30	34.32	3	Vertical	287	1.80	-	38.60	13.16	35.38

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

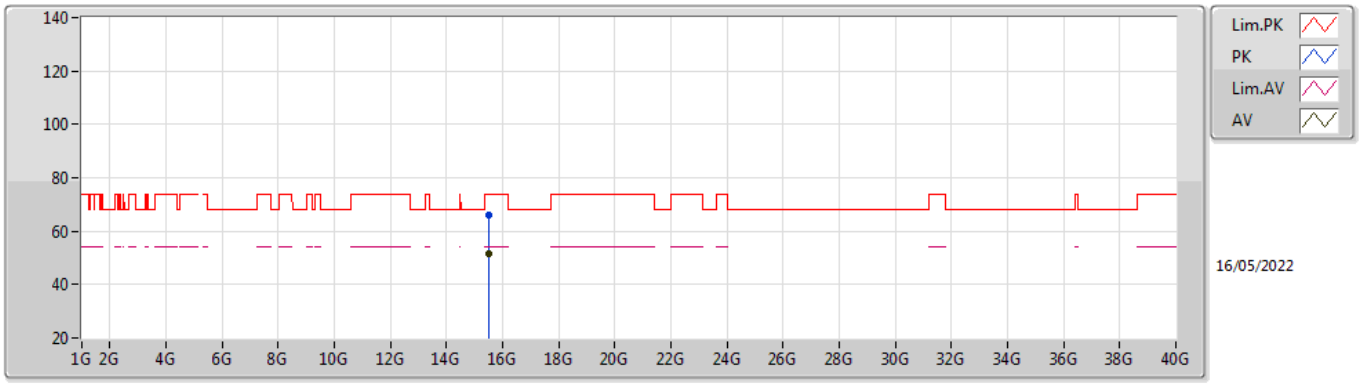


EUT X_1TX
Setting 20.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5138G	65.80	74.00	-8.20	49.42	3	Horizontal	305	2.76	-	38.60	13.16	35.38
AV	15.5148G	51.34	54.00	-2.66	34.96	3	Horizontal	305	2.76	-	38.60	13.16	35.38

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

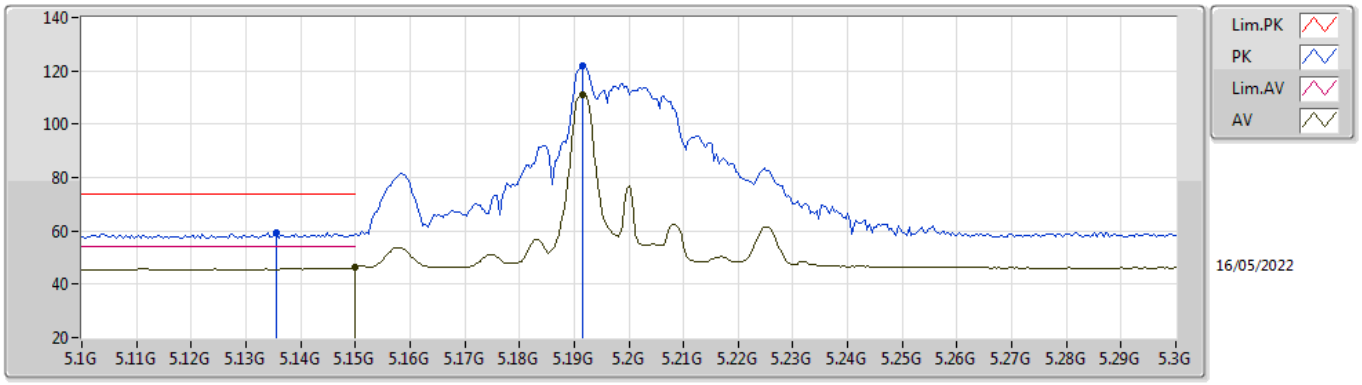


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1356G	59.38	74.00	-14.62	53.58	3	Vertical	66	1.85	-	33.97	7.17	35.34
AV	5.15G	46.15	54.00	-7.85	40.32	3	Vertical	66	1.85	-	34.00	7.17	35.34
PK	5.1916G	121.71	Inf	-Inf	115.68	3	Vertical	66	1.85	-	34.17	7.20	35.34
AV	5.1916G	110.89	Inf	-Inf	104.86	3	Vertical	66	1.85	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

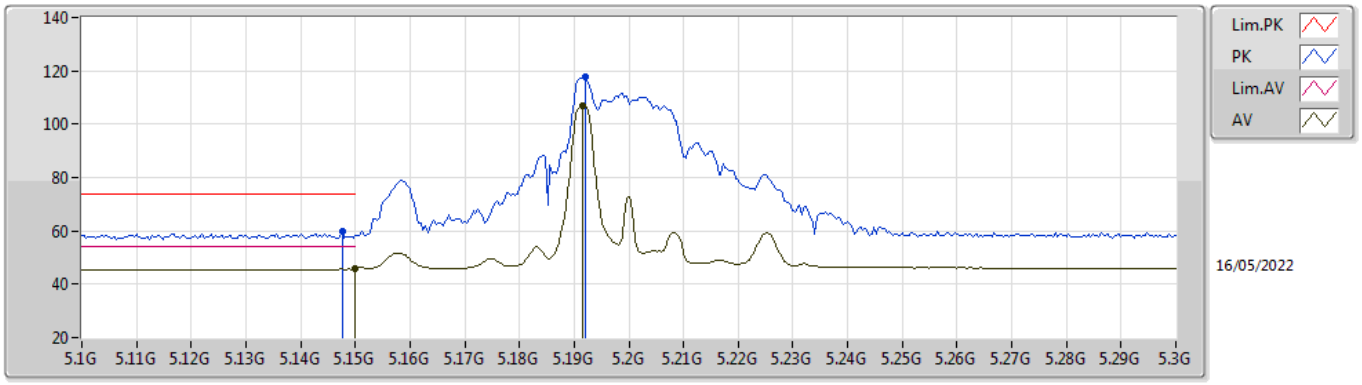


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1476G	59.94	74.00	-14.06	54.11	3	Horizontal	162	1.92	-	34.00	7.17	35.34
AV	5.15G	45.74	54.00	-8.26	39.91	3	Horizontal	162	1.92	-	34.00	7.17	35.34
PK	5.192G	117.80	Inf	-Inf	111.77	3	Horizontal	162	1.92	-	34.17	7.20	35.34
AV	5.1916G	107.11	Inf	-Inf	101.08	3	Horizontal	162	1.92	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

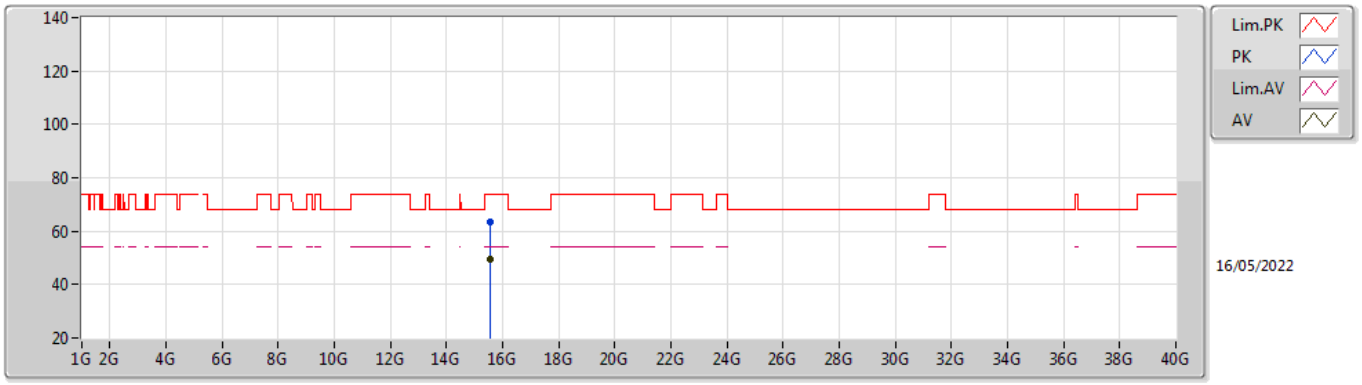


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5748G	63.66	74.00	-10.34	47.72	3	Vertical	223	2.97	-	38.18	13.19	35.43
AV	15.5746G	49.52	54.00	-4.48	33.58	3	Vertical	223	2.97	-	38.18	13.19	35.43

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

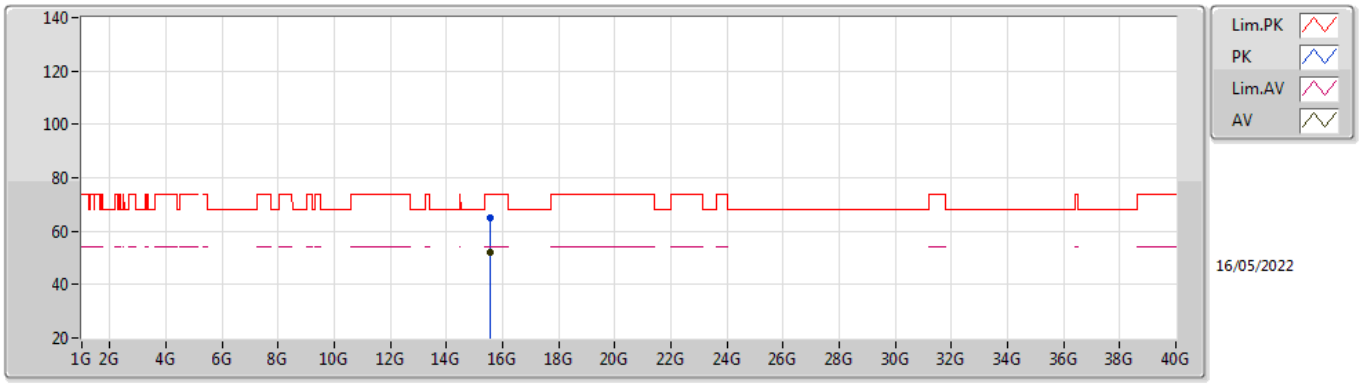


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.574G	65.18	74.00	-8.82	49.24	3	Horizontal	229	1.79	-	38.18	13.19	35.43
AV	15.5746G	52.10	54.00	-1.90	36.16	3	Horizontal	229	1.79	-	38.18	13.19	35.43

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

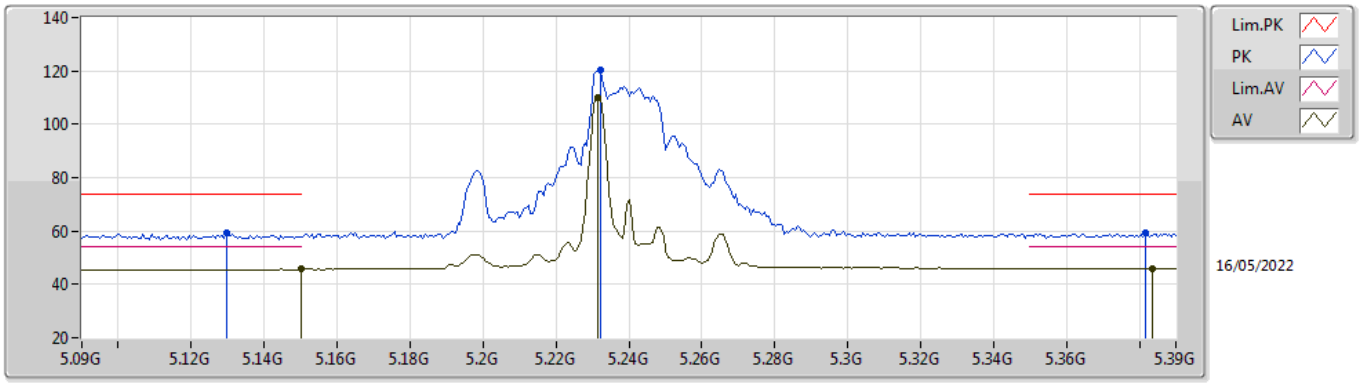


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1296G	59.49	74.00	-14.51	53.71	3	Vertical	67	1.79	-	33.96	7.16	35.34
AV	5.15G	45.86	54.00	-8.14	40.03	3	Vertical	67	1.79	-	34.00	7.17	35.34
PK	5.2322G	120.23	Inf	-Inf	114.04	3	Vertical	67	1.79	-	34.33	7.20	35.34
AV	5.2316G	110.08	Inf	-Inf	103.89	3	Vertical	67	1.79	-	34.33	7.20	35.34
PK	5.3816G	59.12	74.00	-14.88	52.71	3	Vertical	67	1.79	-	34.56	7.20	35.35
AV	5.3834G	46.12	54.00	-7.88	39.70	3	Vertical	67	1.79	-	34.57	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

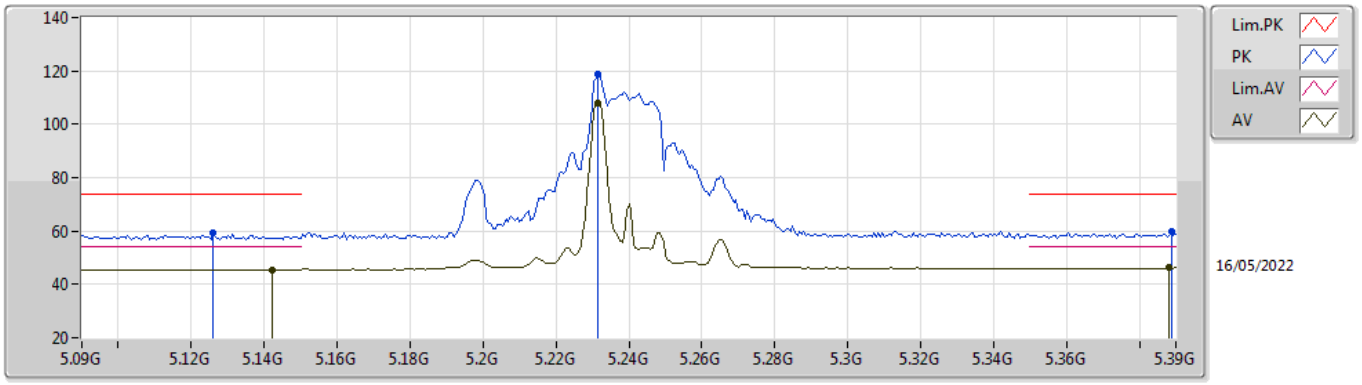


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.126G	59.55	74.00	-14.45	53.78	3	Horizontal	161	1.92	-	33.95	7.16	35.34
AV	5.1422G	45.49	54.00	-8.51	39.68	3	Horizontal	161	1.92	-	33.98	7.17	35.34
PK	5.2316G	118.67	Inf	-Inf	112.48	3	Horizontal	161	1.92	-	34.33	7.20	35.34
AV	5.2316G	107.79	Inf	-Inf	101.60	3	Horizontal	161	1.92	-	34.33	7.20	35.34
PK	5.3888G	59.83	74.00	-14.17	53.40	3	Horizontal	161	1.92	-	34.58	7.20	35.35
AV	5.3882G	46.15	54.00	-7.85	39.72	3	Horizontal	161	1.92	-	34.58	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

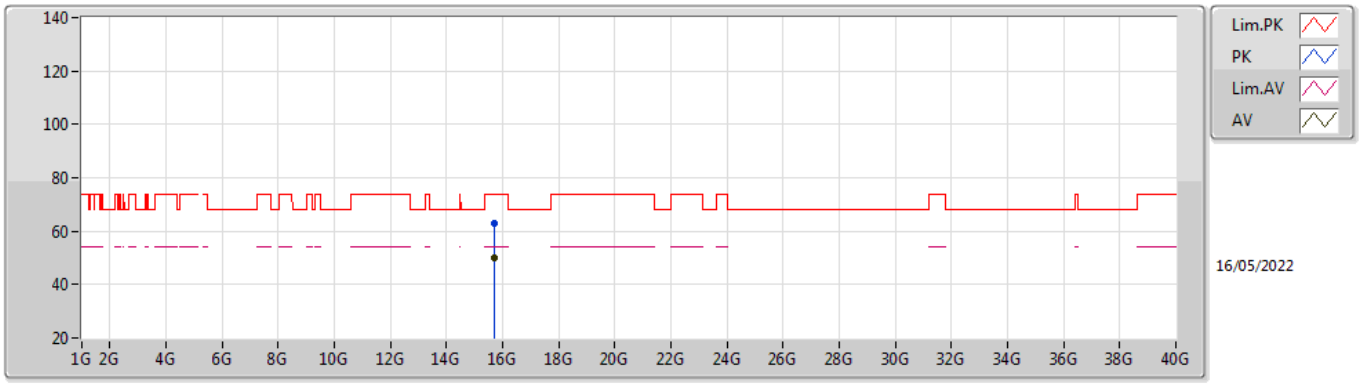


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.695G	62.92	74.00	-11.08	47.67	3	Vertical	140	1.80	-	37.53	13.25	35.53
AV	15.6948G	49.82	54.00	-4.18	34.57	3	Vertical	140	1.80	-	37.53	13.25	35.53

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

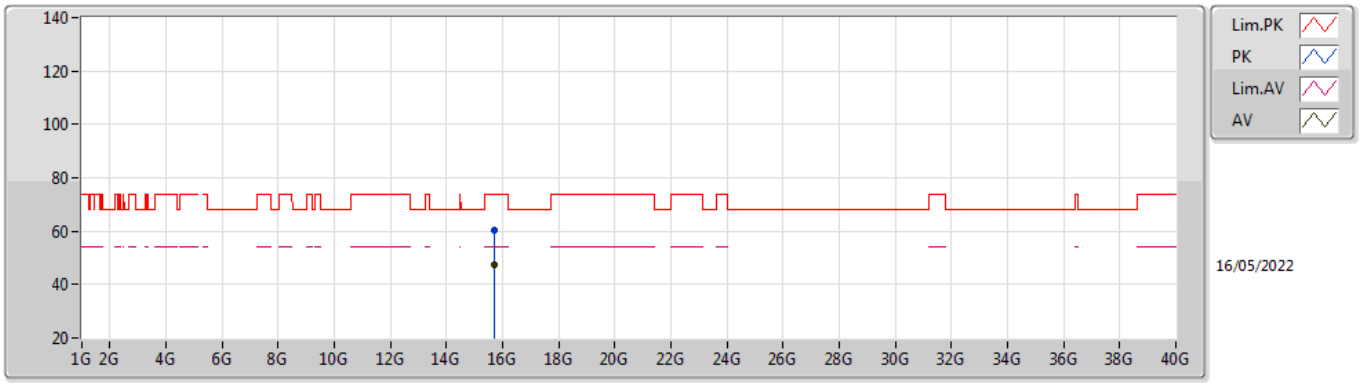


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6946G	60.55	74.00	-13.45	45.30	3	Horizontal	235	2.31	-	37.53	13.25	35.53
AV	15.6946G	47.59	54.00	-6.41	32.34	3	Horizontal	235	2.31	-	37.53	13.25	35.53

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

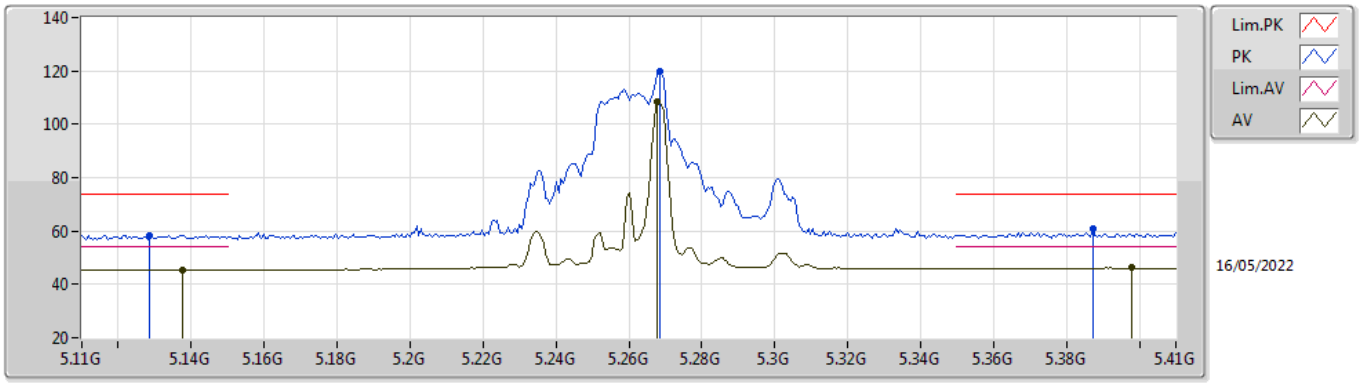


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1286G	58.48	74.00	-15.52	52.70	3	Vertical	68	1.74	-	33.96	7.16	35.34
AV	5.1376G	45.46	54.00	-8.54	39.65	3	Vertical	68	1.74	-	33.98	7.17	35.34
PK	5.2684G	119.74	Inf	-Inf	113.44	3	Vertical	68	1.74	-	34.44	7.20	35.34
AV	5.2678G	108.45	Inf	-Inf	102.15	3	Vertical	68	1.74	-	34.44	7.20	35.34
PK	5.3872G	60.95	74.00	-13.05	54.53	3	Vertical	68	1.74	-	34.57	7.20	35.35
AV	5.398G	46.17	54.00	-7.83	39.72	3	Vertical	68	1.74	-	34.60	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

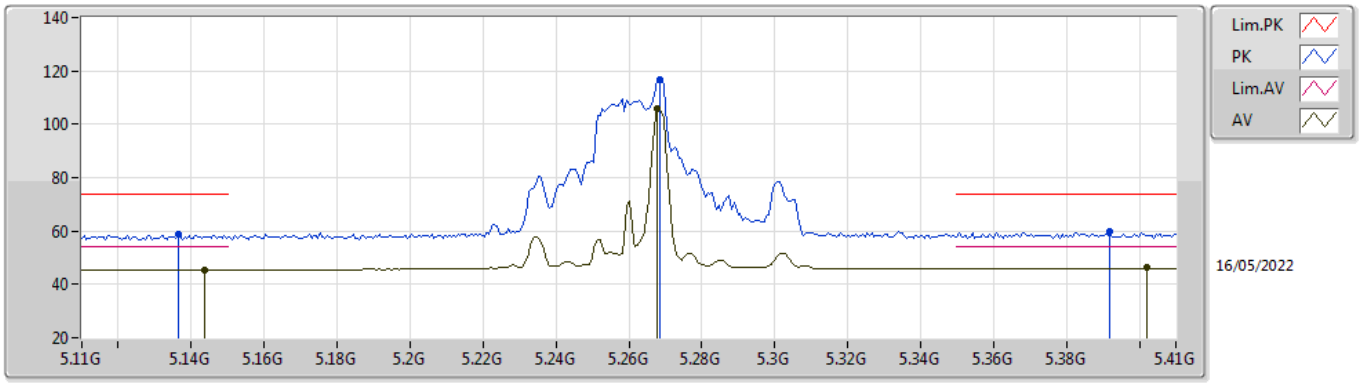


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1364G	58.84	74.00	-15.16	53.04	3	Horizontal	160	1.90	-	33.97	7.17	35.34
AV	5.1436G	45.45	54.00	-8.55	39.63	3	Horizontal	160	1.90	-	33.99	7.17	35.34
PK	5.2684G	116.87	Inf	-Inf	110.57	3	Horizontal	160	1.90	-	34.44	7.20	35.34
AV	5.2678G	105.71	Inf	-Inf	99.41	3	Horizontal	160	1.90	-	34.44	7.20	35.34
PK	5.392G	59.81	74.00	-14.19	53.38	3	Horizontal	160	1.90	-	34.58	7.20	35.35
AV	5.4022G	46.18	54.00	-7.82	39.73	3	Horizontal	160	1.90	-	34.60	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

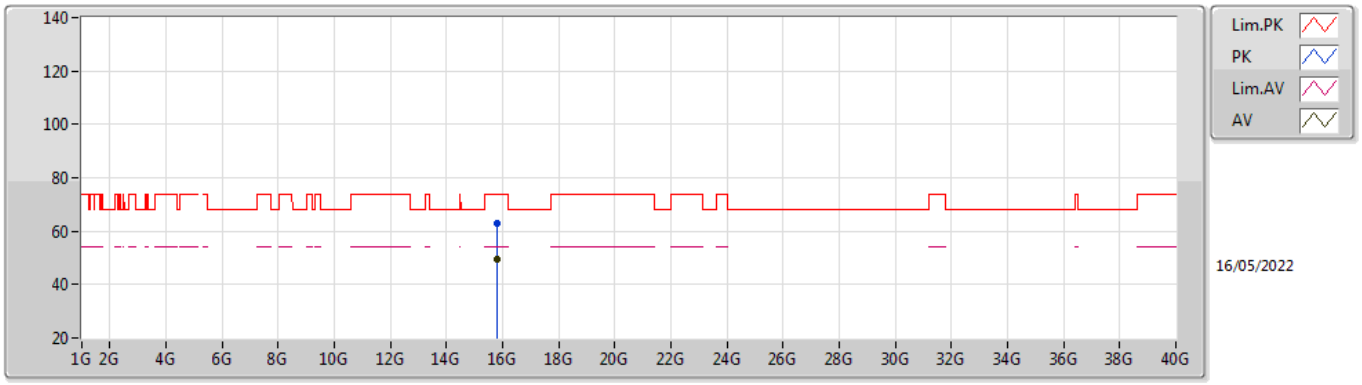


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.8034G	62.78	74.00	-11.22	47.21	3	Vertical	137	1.80	-	37.89	13.30	35.62
AV	15.8048G	49.29	54.00	-4.71	33.73	3	Vertical	137	1.80	-	37.89	13.30	35.63

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

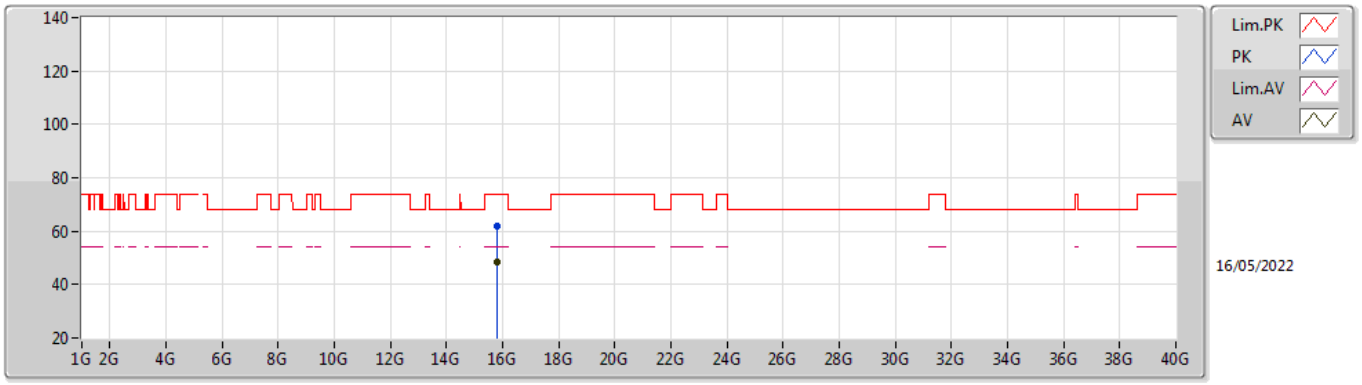


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.8056G	62.10	74.00	-11.90	46.55	3	Horizontal	152	1.80	-	37.88	13.30	35.63
AV	15.805G	48.30	54.00	-5.70	32.75	3	Horizontal	152	1.80	-	37.88	13.30	35.63

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

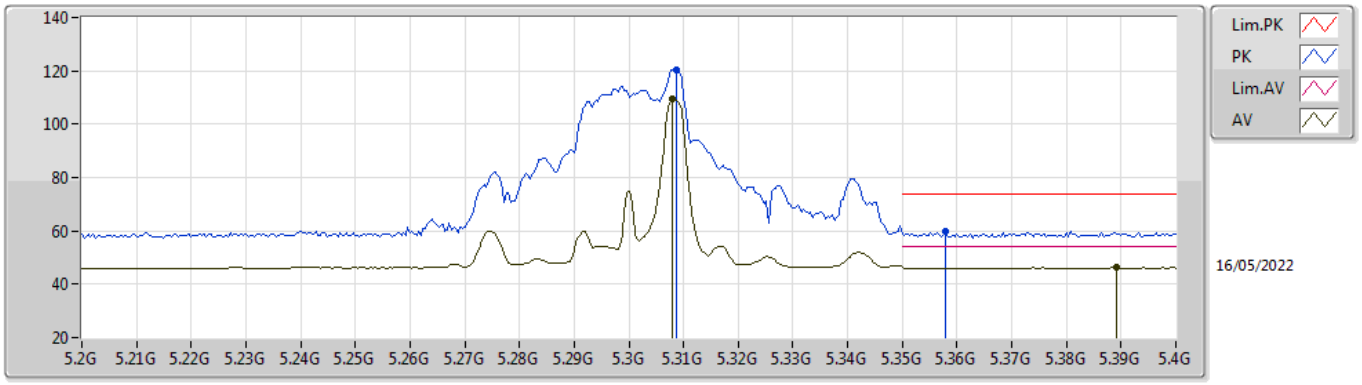


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3088G	120.48	Inf	-Inf	114.12	3	Vertical	66	1.83	-	34.50	7.20	35.34
AV	5.308G	109.54	Inf	-Inf	103.18	3	Vertical	66	1.83	-	34.50	7.20	35.34
PK	5.358G	60.05	74.00	-13.95	53.67	3	Vertical	66	1.83	-	34.52	7.20	35.34
AV	5.3892G	46.20	54.00	-7.80	39.77	3	Vertical	66	1.83	-	34.58	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

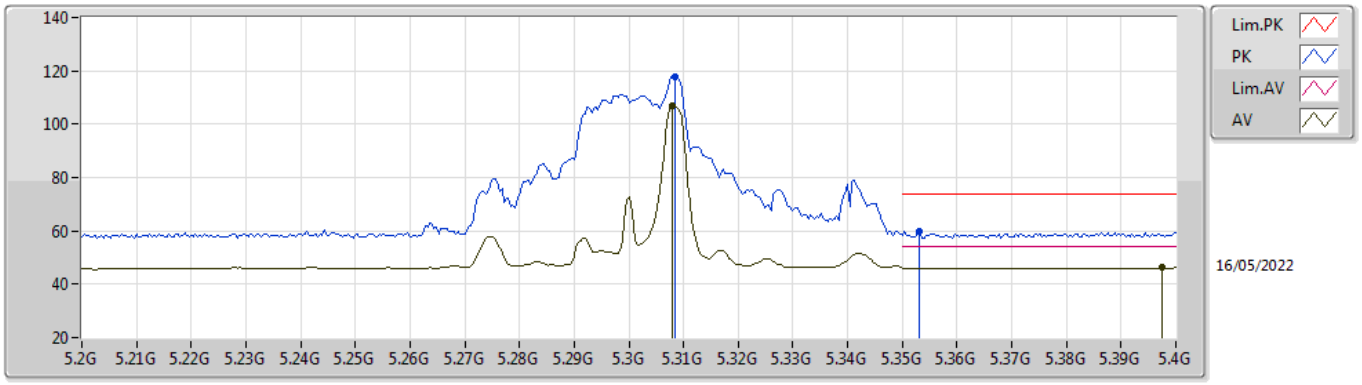


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3084G	117.85	Inf	-Inf	111.49	3	Horizontal	161	1.89	-	34.50	7.20	35.34
AV	5.308G	107.09	Inf	-Inf	100.73	3	Horizontal	161	1.89	-	34.50	7.20	35.34
PK	5.3532G	59.97	74.00	-14.03	53.60	3	Horizontal	161	1.89	-	34.51	7.20	35.34
AV	5.3976G	46.15	54.00	-7.85	39.70	3	Horizontal	161	1.89	-	34.60	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

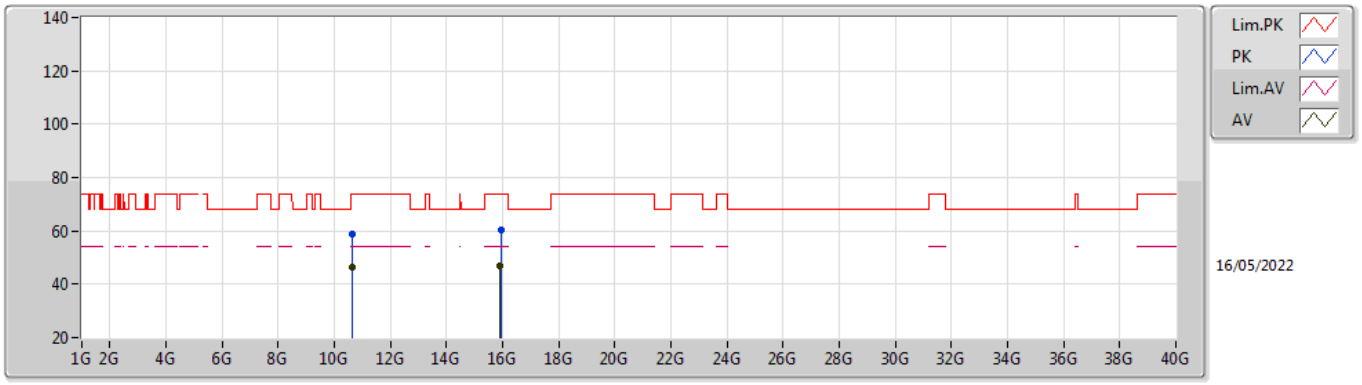


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.616G	58.96	74.00	-15.04	45.51	3	Vertical	223	1.80	-	38.23	10.59	35.37
AV	10.6168G	46.27	54.00	-7.73	32.82	3	Vertical	223	1.80	-	38.23	10.59	35.37
PK	15.9418G	60.23	74.00	-13.77	45.08	3	Vertical	190	2.41	-	37.52	13.37	35.74
AV	15.9256G	46.85	54.00	-7.15	31.67	3	Vertical	190	2.41	-	37.55	13.36	35.73

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

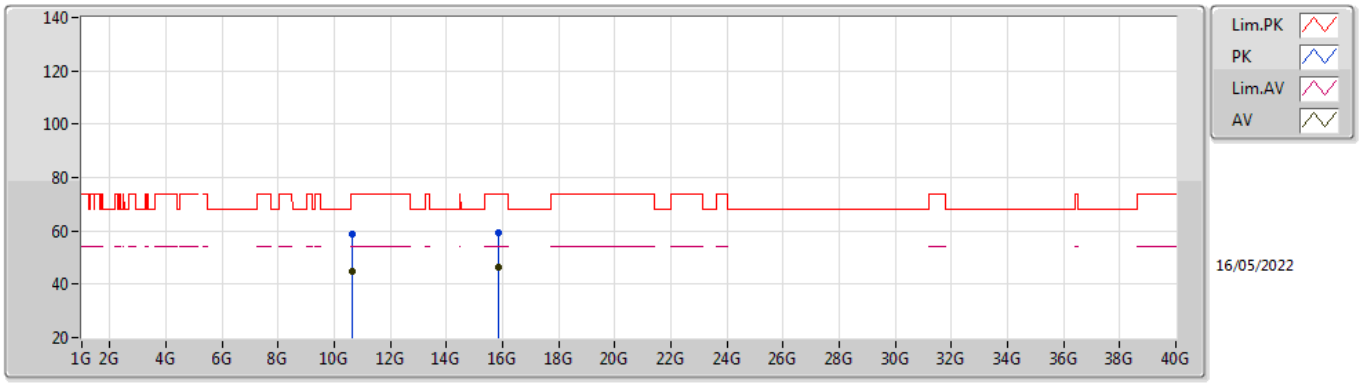


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6174G	58.77	74.00	-15.23	45.32	3	Horizontal	209	1.78	-	38.23	10.59	35.37
AV	10.6166G	45.02	54.00	-8.98	31.57	3	Horizontal	209	1.78	-	38.23	10.59	35.37
PK	15.8764G	59.36	74.00	-14.64	44.04	3	Horizontal	302	1.66	-	37.67	13.34	35.69
AV	15.8522G	46.50	54.00	-7.50	31.10	3	Horizontal	302	1.66	-	37.74	13.33	35.67

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

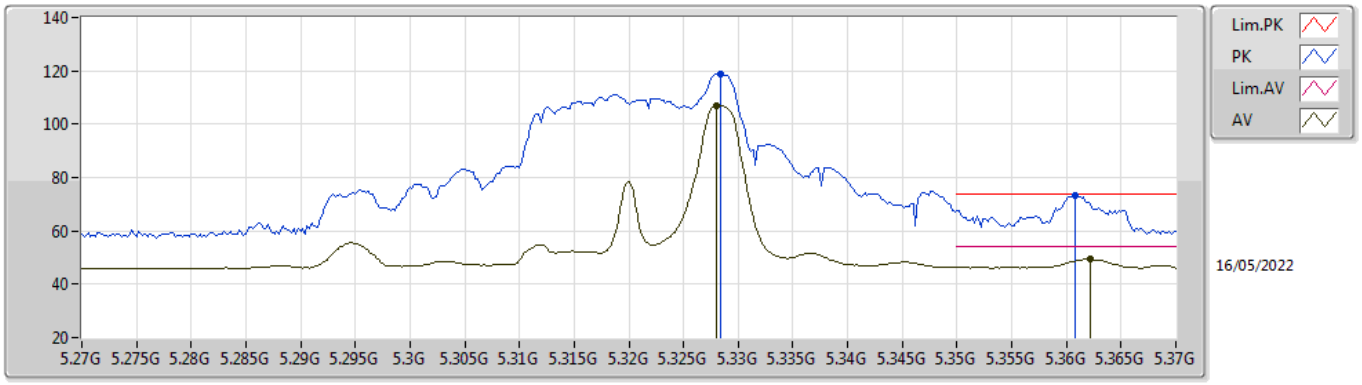


EUT X_1TX
Setting 19.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3284G	118.57	Inf	-Inf	112.21	3	Vertical	259	1.77	-	34.50	7.20	35.34
AV	5.328G	107.11	Inf	-Inf	100.75	3	Vertical	259	1.77	-	34.50	7.20	35.34
PK	5.3608G	73.46	74.00	-0.54	67.08	3	Vertical	259	1.77	-	34.52	7.20	35.34
AV	5.3622G	49.29	54.00	-4.71	42.91	3	Vertical	259	1.77	-	34.52	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

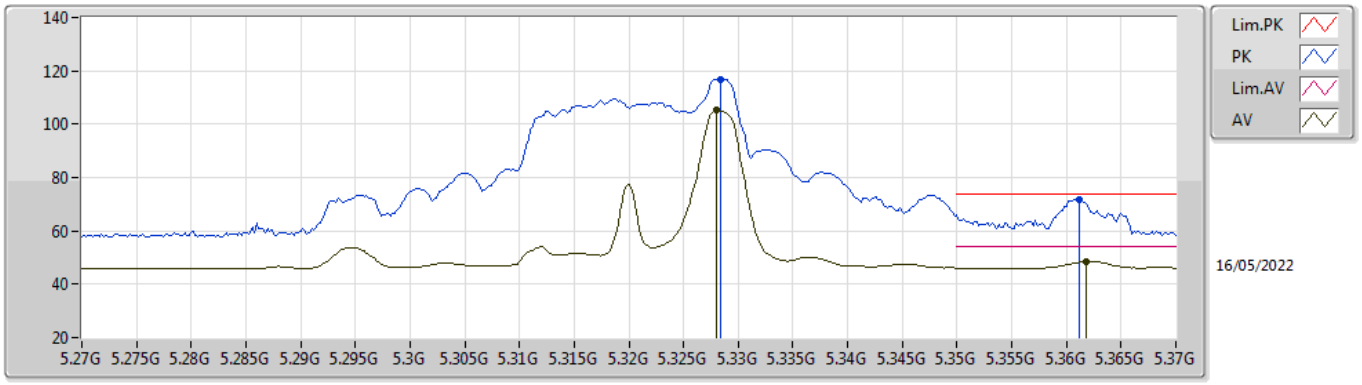


EUT X_1TX
Setting 19.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3284G	116.80	Inf	-Inf	110.44	3	Horizontal	187	1.86	-	34.50	7.20	35.34
AV	5.328G	105.19	Inf	-Inf	98.83	3	Horizontal	187	1.86	-	34.50	7.20	35.34
PK	5.3612G	71.93	74.00	-2.07	65.55	3	Horizontal	187	1.86	-	34.52	7.20	35.34
AV	5.3618G	48.47	54.00	-5.53	42.09	3	Horizontal	187	1.86	-	34.52	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

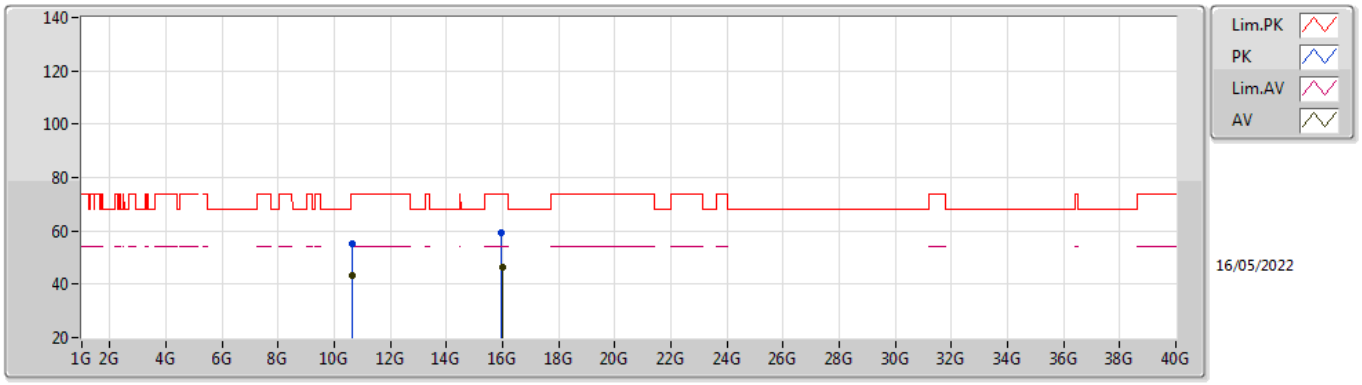


EUT X_1TX
Setting 19.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6218G	55.00	74.00	-19.00	41.54	3	Vertical	309	1.92	-	38.24	10.59	35.37
AV	10.6568G	43.08	54.00	-10.92	29.51	3	Vertical	309	1.92	-	38.31	10.60	35.34
PK	15.9516G	59.42	74.00	-14.58	44.29	3	Vertical	236	2.12	-	37.50	13.38	35.75
AV	15.9854G	46.56	54.00	-7.44	31.52	3	Vertical	236	2.12	-	37.43	13.39	35.78

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

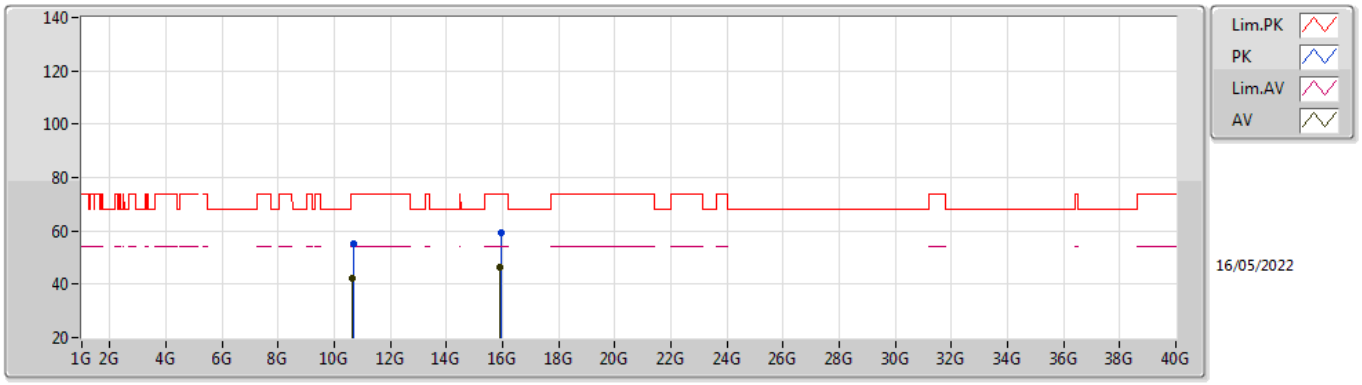


EUT X_1TX
Setting 19.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6664G	55.38	74.00	-18.62	41.78	3	Horizontal	25	1.38	-	38.33	10.60	35.33
AV	10.657G	42.02	54.00	-11.98	28.44	3	Horizontal	25	1.38	-	38.31	10.60	35.33
PK	15.9696G	59.56	74.00	-14.44	44.48	3	Horizontal	145	2.26	-	37.46	13.38	35.76
AV	15.9108G	46.36	54.00	-7.64	31.14	3	Horizontal	145	2.26	-	37.58	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

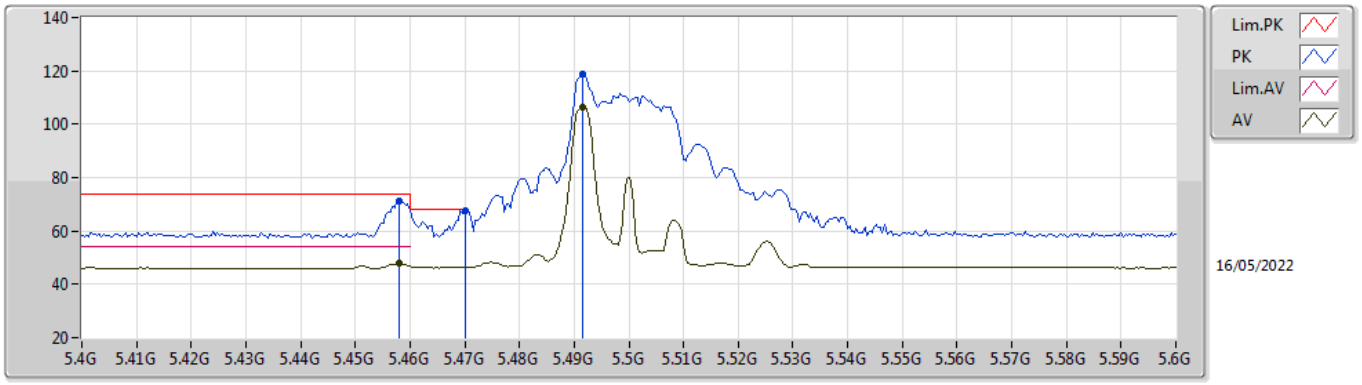


EUT X_1TX
Setting 19.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.458G	71.00	74.00	-3.00	64.57	3	Vertical	254	1.88	-	34.52	7.26	35.35
AV	5.458G	47.74	54.00	-6.26	41.31	3	Vertical	254	1.88	-	34.52	7.26	35.35
PK	5.47G	67.53	68.20	-0.67	61.07	3	Vertical	254	1.88	-	34.54	7.27	35.35
PK	5.4916G	118.68	Inf	-Inf	112.16	3	Vertical	254	1.88	-	34.58	7.29	35.35
AV	5.4916G	106.36	Inf	-Inf	99.84	3	Vertical	254	1.88	-	34.58	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

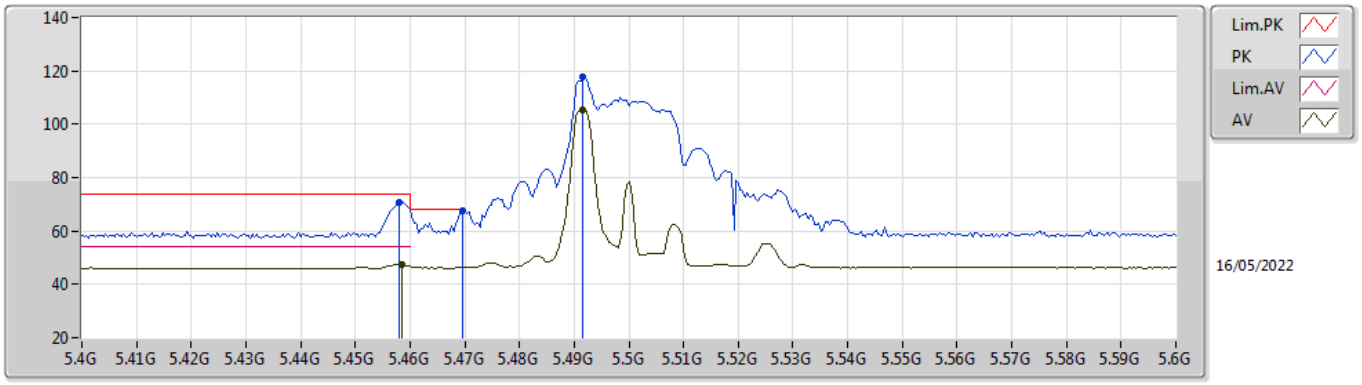


EUT X_1TX
Setting 19.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.458G	70.85	74.00	-3.15	64.42	3	Horizontal	184	2.06	-	34.52	7.26	35.35
AV	5.4584G	47.38	54.00	-6.62	40.95	3	Horizontal	184	2.06	-	34.52	7.26	35.35
PK	5.4696G	67.38	68.20	-0.82	60.92	3	Horizontal	184	2.06	-	34.54	7.27	35.35
PK	5.4916G	117.69	Inf	-Inf	111.17	3	Horizontal	184	2.06	-	34.58	7.29	35.35
AV	5.4916G	105.41	Inf	-Inf	98.89	3	Horizontal	184	2.06	-	34.58	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

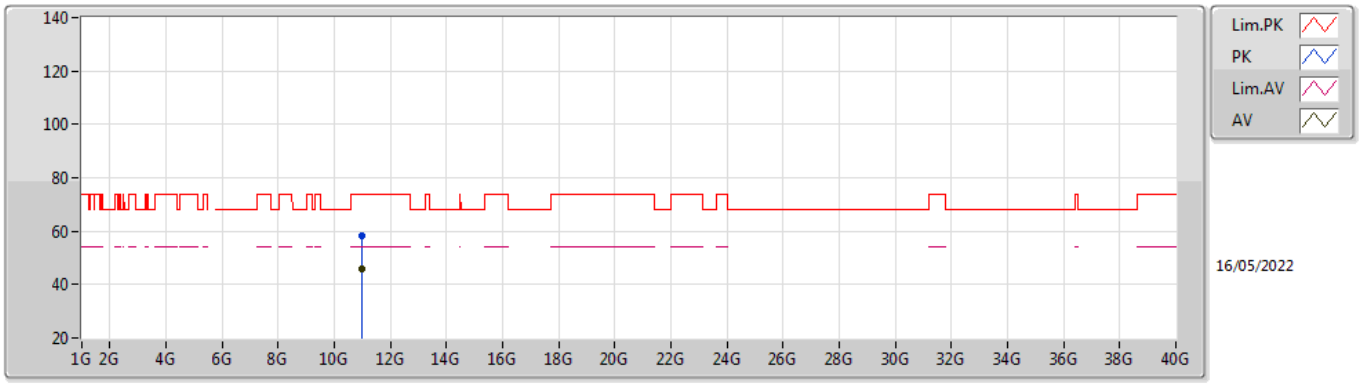


EUT X_1TX
Setting 19.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9824G	58.07	74.00	-15.93	44.10	3	Vertical	190	1.65	-	38.38	10.65	35.06
AV	10.983G	46.09	54.00	-7.91	32.11	3	Vertical	190	1.65	-	38.38	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

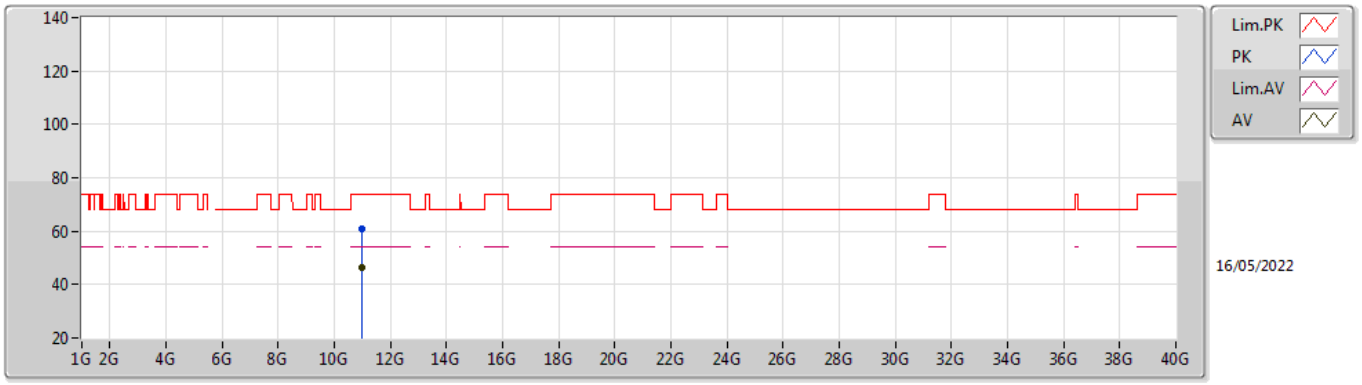


EUT X_1TX
Setting 19.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9834G	60.85	74.00	-13.15	46.87	3	Horizontal	153	2.60	-	38.38	10.65	35.05
AV	10.9828G	46.26	54.00	-7.74	32.28	3	Horizontal	153	2.60	-	38.38	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

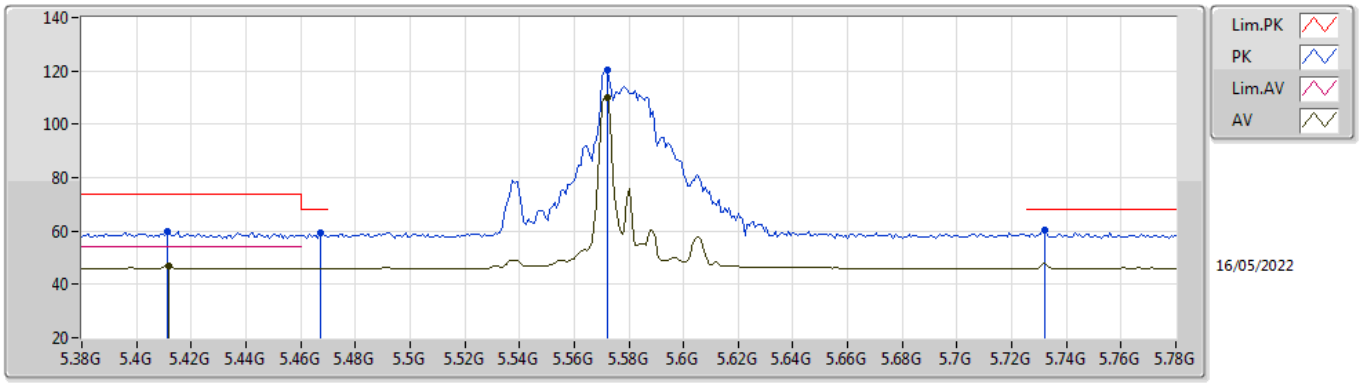


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4112G	60.07	74.00	-13.93	53.63	3	Vertical	318	1.97	-	34.58	7.21	35.35
AV	5.412G	47.04	54.00	-6.96	40.60	3	Vertical	318	1.97	-	34.58	7.21	35.35
PK	5.4672G	59.08	68.20	-9.12	52.63	3	Vertical	318	1.97	-	34.53	7.27	35.35
PK	5.572G	120.35	Inf	-Inf	113.77	3	Vertical	318	1.97	-	34.60	7.37	35.39
AV	5.572G	109.76	Inf	-Inf	103.18	3	Vertical	318	1.97	-	34.60	7.37	35.39
PK	5.732G	60.57	68.20	-7.63	54.40	3	Vertical	318	1.97	-	34.24	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

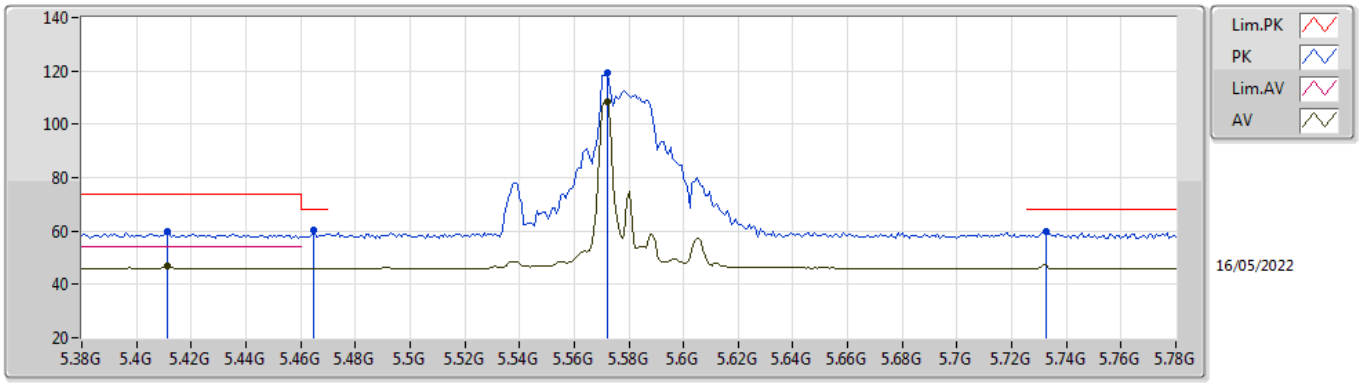


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4112G	59.58	74.00	-14.42	53.14	3	Horizontal	185	2.10	-	34.58	7.21	35.35
AV	5.4112G	47.00	54.00	-7.00	40.56	3	Horizontal	185	2.10	-	34.58	7.21	35.35
PK	5.4648G	60.38	68.20	-7.82	53.94	3	Horizontal	185	2.10	-	34.53	7.26	35.35
PK	5.572G	119.09	Inf	-Inf	112.51	3	Horizontal	185	2.10	-	34.60	7.37	35.39
AV	5.572G	108.54	Inf	-Inf	101.96	3	Horizontal	185	2.10	-	34.60	7.37	35.39
PK	5.7328G	59.93	68.20	-8.27	53.77	3	Horizontal	185	2.10	-	34.23	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

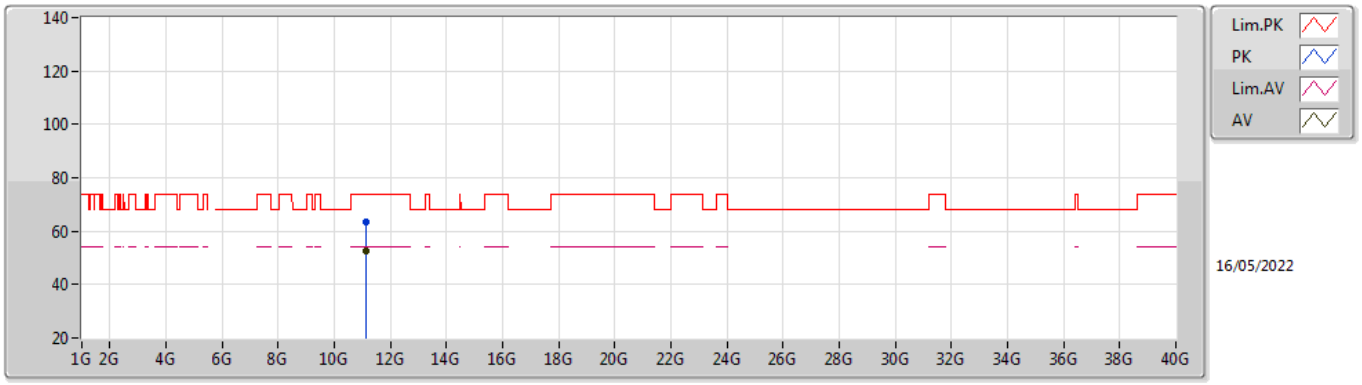


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1428G	63.34	74.00	-10.66	49.33	3	Vertical	174	2.38	-	38.54	10.67	35.20
AV	11.143G	52.36	54.00	-1.64	38.35	3	Vertical	174	2.38	-	38.54	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

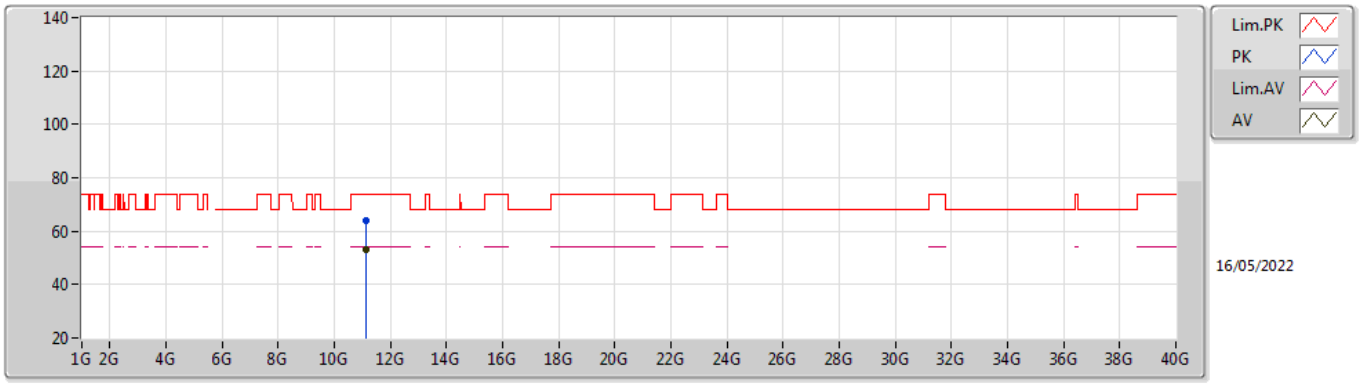


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1444G	63.89	74.00	-10.11	49.88	3	Horizontal	223	2.07	-	38.54	10.67	35.20
AV	11.143G	53.28	54.00	-0.72	39.27	3	Horizontal	223	2.07	-	38.54	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

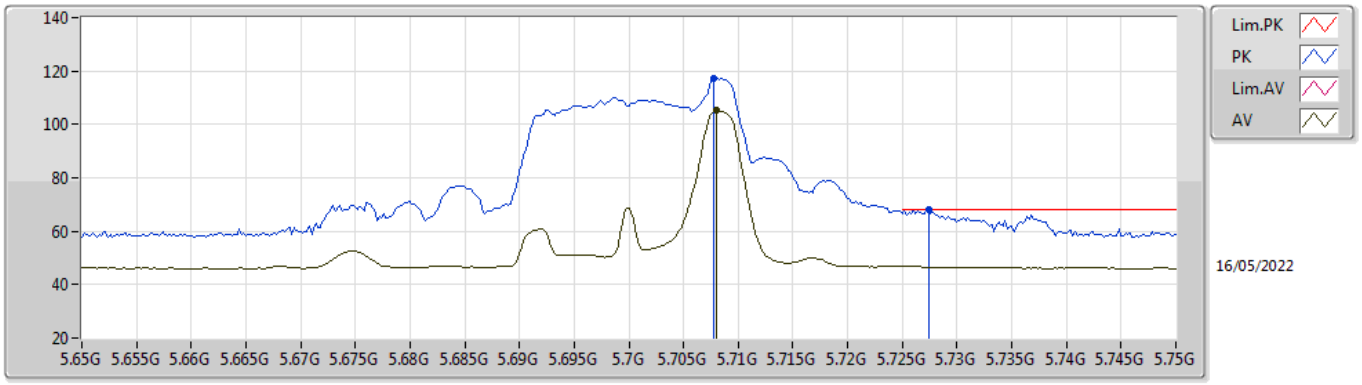


EUT X_1TX
Setting 17
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7078G	117.12	Inf	-Inf	110.89	3	Vertical	320	1.90	-	34.28	7.40	35.45
AV	5.708G	105.16	Inf	-Inf	98.93	3	Vertical	320	1.90	-	34.28	7.40	35.45
PK	5.7274G	68.03	68.20	-0.17	61.84	3	Vertical	320	1.90	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

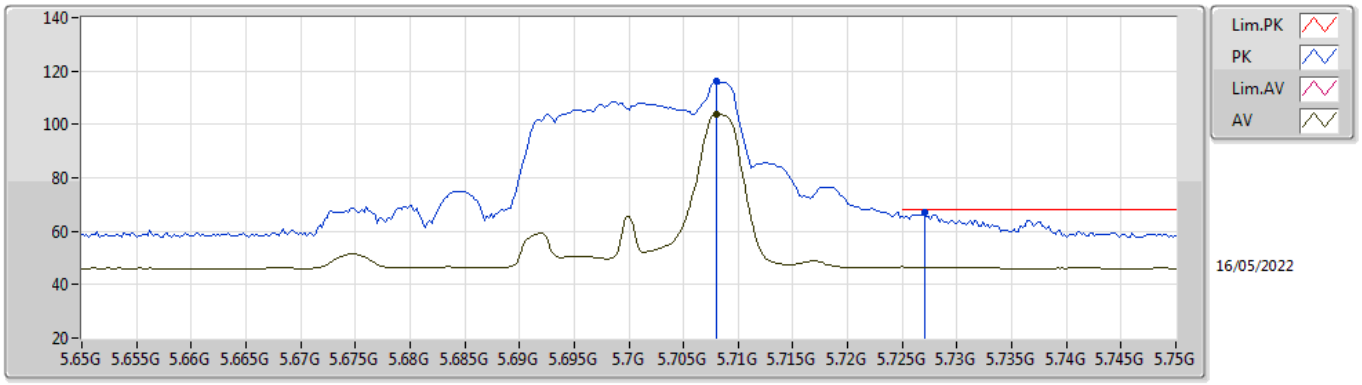


EUT X_1TX
Setting 17
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.708G	115.96	Inf	-Inf	109.73	3	Horizontal	181	2.04	-	34.28	7.40	35.45
AV	5.708G	103.89	Inf	-Inf	97.66	3	Horizontal	181	2.04	-	34.28	7.40	35.45
PK	5.727G	67.24	68.20	-0.96	61.05	3	Horizontal	181	2.04	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

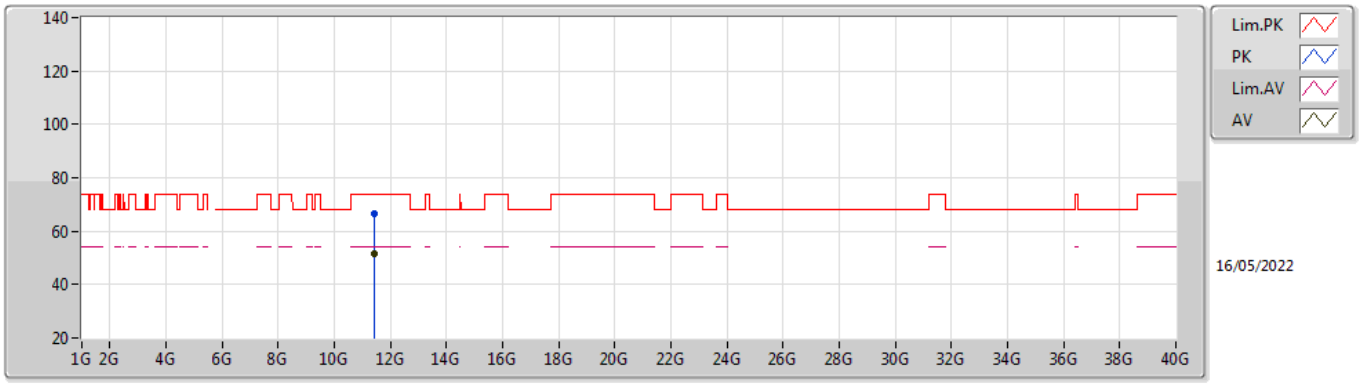


EUT X_1TX
Setting 17
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4158G	66.72	74.00	-7.28	52.69	3	Vertical	268	2.33	-	38.83	10.71	35.51
AV	11.4168G	51.43	54.00	-2.57	37.40	3	Vertical	268	2.33	-	38.83	10.71	35.51

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

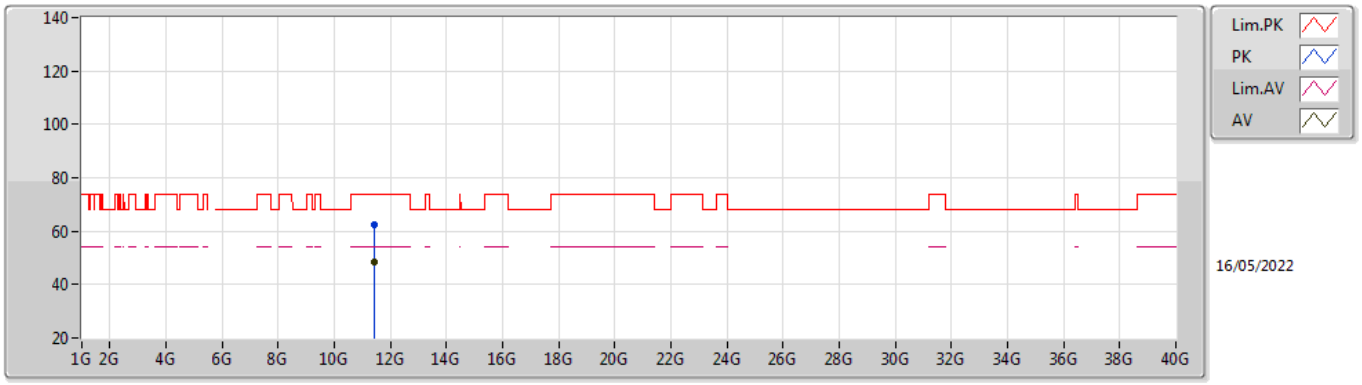


EUT X_1TX
Setting 17
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4156G	62.42	74.00	-11.58	48.39	3	Horizontal	154	1.23	-	38.83	10.71	35.51
AV	11.4166G	48.40	54.00	-5.60	34.37	3	Horizontal	154	1.23	-	38.83	10.71	35.51

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

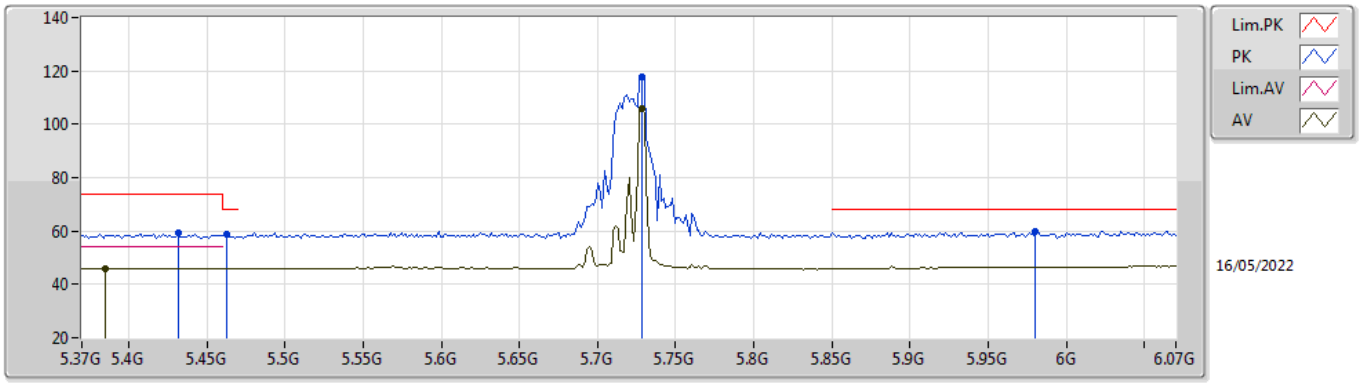


EUT X_1TX
Setting 18.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4316G	59.49	74.00	-14.51	53.07	3	Vertical	320	1.99	-	34.54	7.23	35.35
AV	5.3854G	46.03	54.00	-7.97	39.61	3	Vertical	320	1.99	-	34.57	7.20	35.35
PK	5.4624G	59.05	68.20	-9.15	52.62	3	Vertical	320	1.99	-	34.52	7.26	35.35
PK	5.7284G	117.70	Inf	-Inf	111.52	3	Vertical	320	1.99	-	34.24	7.40	35.46
AV	5.7284G	106.01	Inf	-Inf	99.83	3	Vertical	320	1.99	-	34.24	7.40	35.46
PK	5.9804G	60.03	68.20	-8.17	53.24	3	Vertical	320	1.99	-	34.80	7.58	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

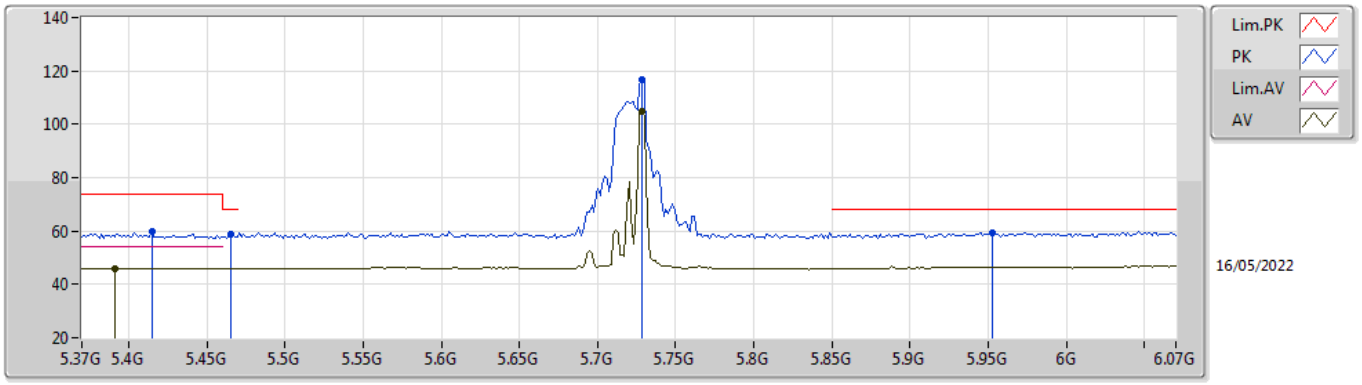


EUT X_1TX
Setting 18.25
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4148G	59.74	74.00	-14.26	53.31	3	Horizontal	342	2.09	-	34.57	7.21	35.35
AV	5.391G	46.03	54.00	-7.97	39.60	3	Horizontal	342	2.09	-	34.58	7.20	35.35
PK	5.4652G	58.96	68.20	-9.24	52.51	3	Horizontal	342	2.09	-	34.53	7.27	35.35
PK	5.7284G	116.77	Inf	-Inf	110.59	3	Horizontal	342	2.09	-	34.24	7.40	35.46
AV	5.7284G	104.98	Inf	-Inf	98.80	3	Horizontal	342	2.09	-	34.24	7.40	35.46
PK	5.9524G	59.38	68.20	-8.82	52.61	3	Horizontal	342	2.09	-	34.80	7.55	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

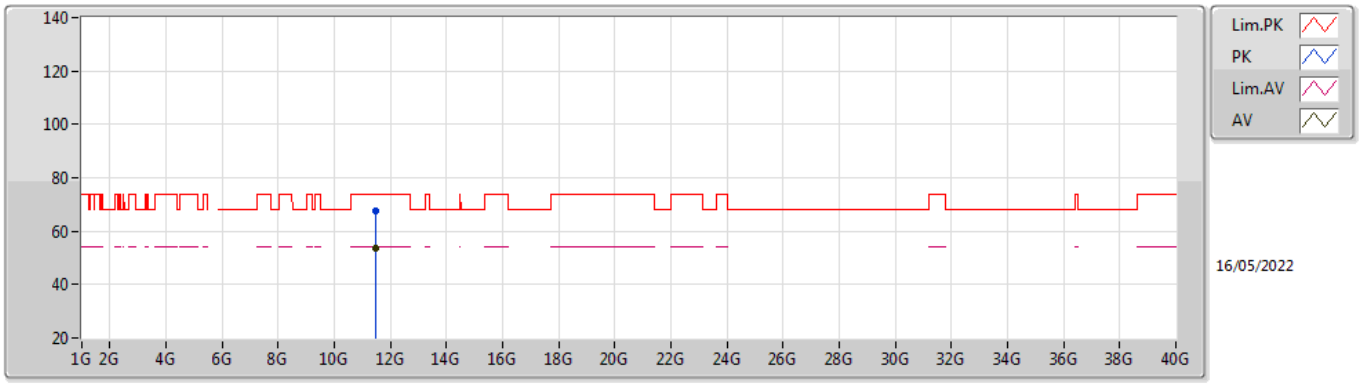


EUT X_1TX
Setting 18.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4566G	67.35	74.00	-6.65	53.27	3	Vertical	188	2.47	-	38.91	10.72	35.55
AV	11.4568G	53.67	54.00	-0.33	39.59	3	Vertical	188	2.47	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

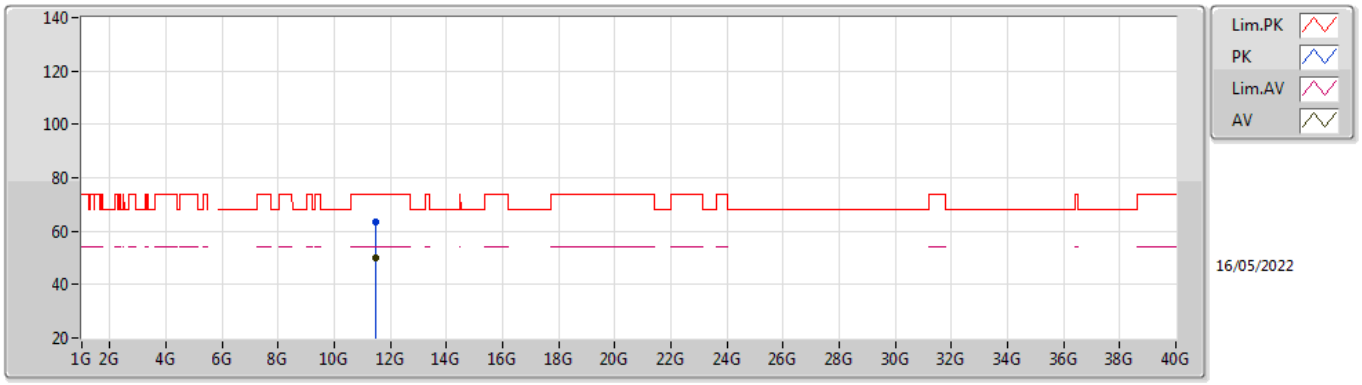


EUT X_1TX
Setting 18.25
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4558G	63.19	74.00	-10.81	49.11	3	Horizontal	181	2.07	-	38.91	10.72	35.55
AV	11.4568G	49.79	54.00	-4.21	35.71	3	Horizontal	181	2.07	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

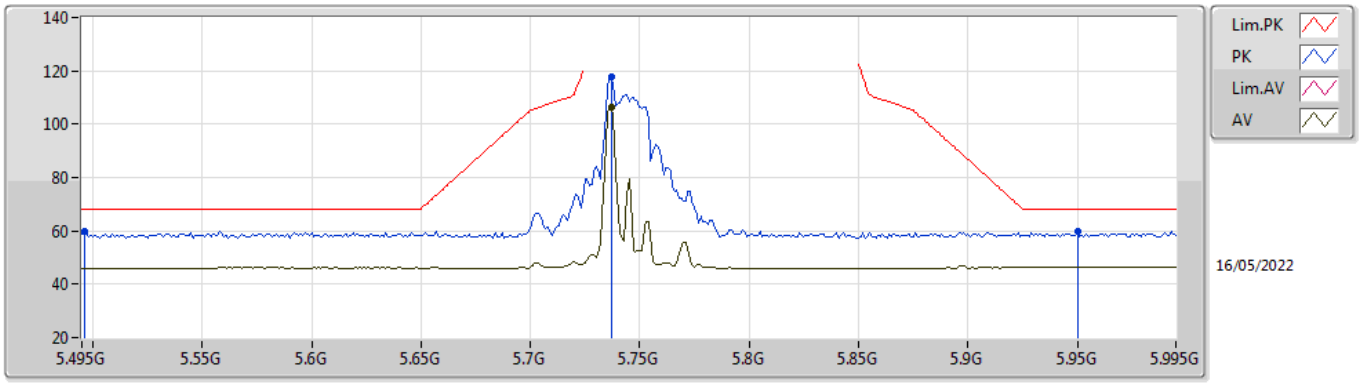


EUT X_1TX
Setting 19.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.496G	59.74	68.20	-8.46	53.20	3	Vertical	322	1.90	-	34.59	7.30	35.35
PK	5.737G	118.00	Inf	-Inf	111.84	3	Vertical	322	1.90	-	34.23	7.40	35.47
AV	5.737G	106.39	Inf	-Inf	100.23	3	Vertical	322	1.90	-	34.23	7.40	35.47
PK	5.95G	59.62	68.20	-8.58	52.85	3	Vertical	322	1.90	-	34.80	7.55	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

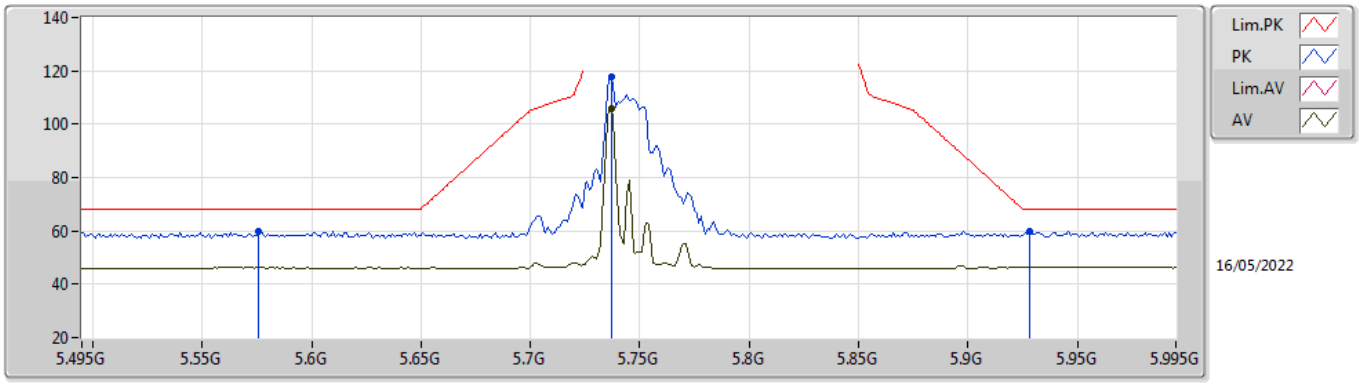


EUT X_1TX
Setting 19.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.576G	59.85	68.20	-8.35	53.26	3	Horizontal	184	2.04	-	34.60	7.38	35.39
PK	5.737G	117.64	Inf	-Inf	111.48	3	Horizontal	184	2.04	-	34.23	7.40	35.47
AV	5.737G	105.95	Inf	-Inf	99.79	3	Horizontal	184	2.04	-	34.23	7.40	35.47
PK	5.928G	59.79	68.20	-8.41	53.11	3	Horizontal	184	2.04	-	34.71	7.53	35.56

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

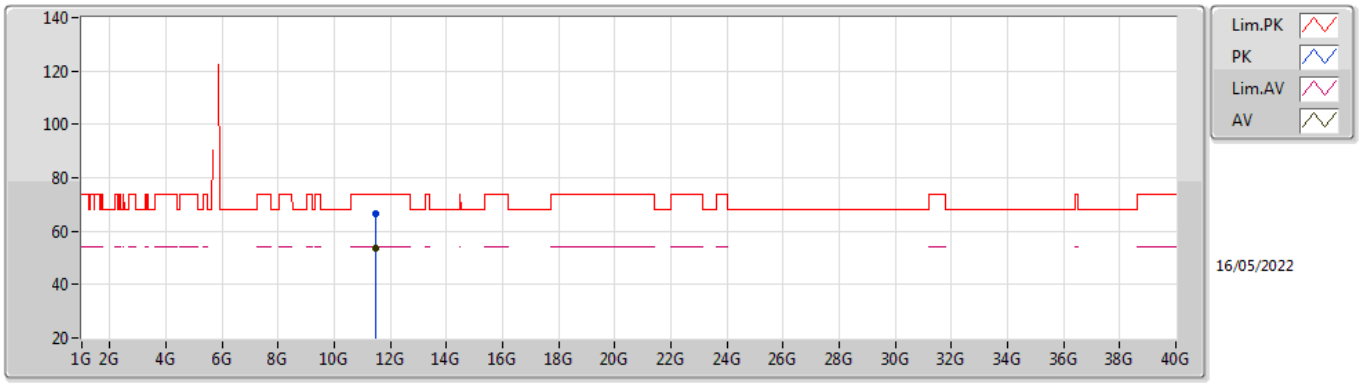


EUT X_1TX
Setting 19.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.474G	66.35	74.00	-7.65	52.25	3	Vertical	184	2.58	-	38.95	10.72	35.57
AV	11.473G	53.77	54.00	-0.23	39.67	3	Vertical	184	2.58	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

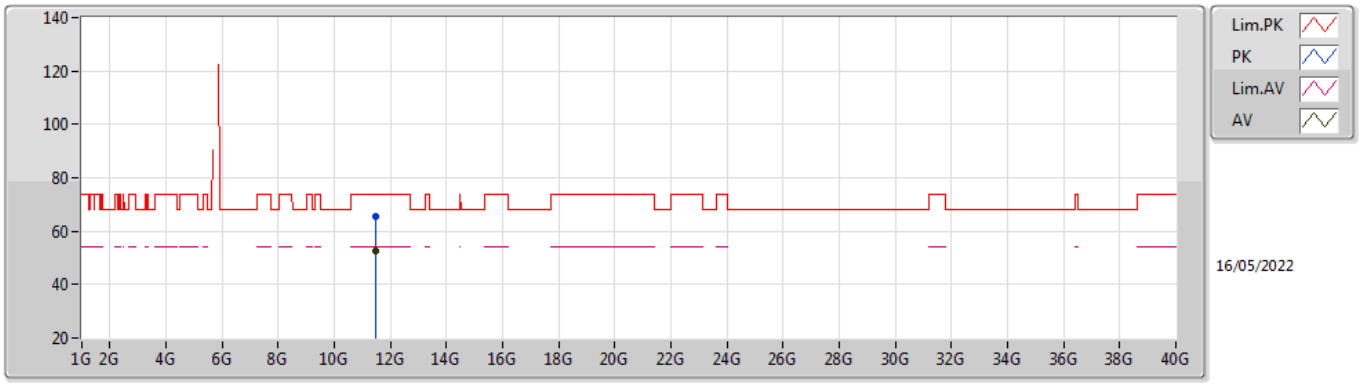


EUT X_1TX
Setting 19.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.472G	65.40	74.00	-8.60	51.31	3	Horizontal	188	2.15	-	38.94	10.72	35.57
AV	11.473G	52.45	54.00	-1.55	38.35	3	Horizontal	188	2.15	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

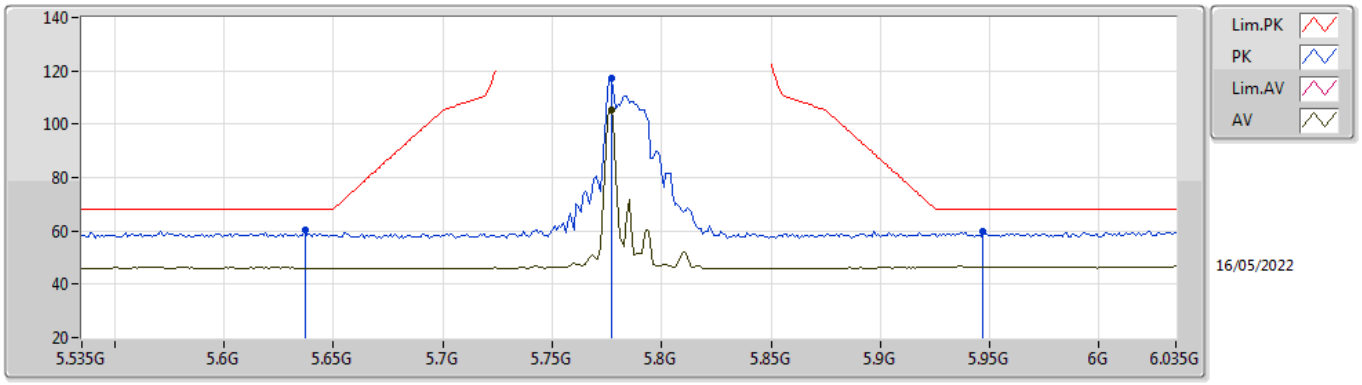


EUT X_1TX
Setting 18.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.637G	60.29	68.20	-7.91	53.78	3	Vertical	323	1.88	-	34.53	7.40	35.42
PK	5.777G	117.00	Inf	-Inf	110.89	3	Vertical	323	1.88	-	34.20	7.40	35.49
AV	5.777G	105.09	Inf	-Inf	98.98	3	Vertical	323	1.88	-	34.20	7.40	35.49
PK	5.947G	59.97	68.20	-8.23	53.20	3	Vertical	323	1.88	-	34.79	7.55	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

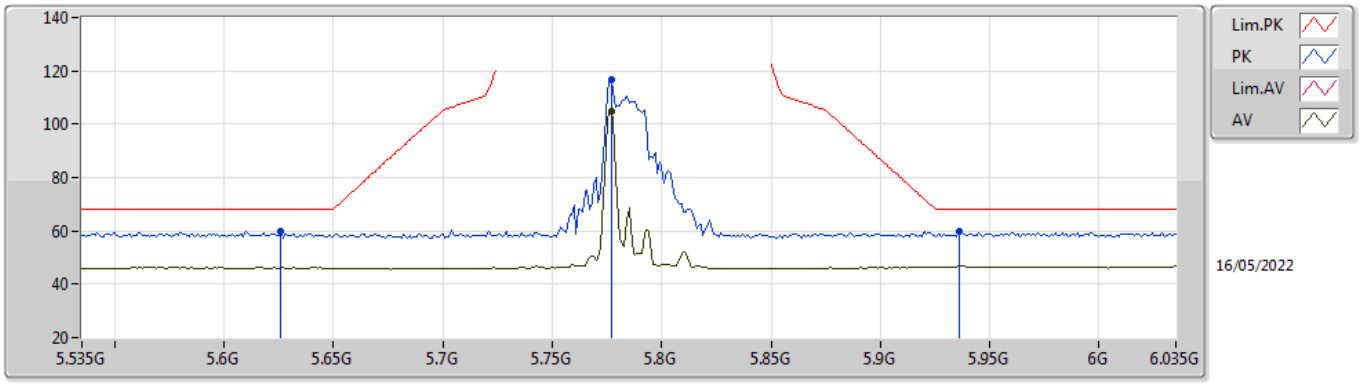


EUT X_1TX
Setting 18.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.626G	59.82	68.20	-8.38	53.28	3	Horizontal	201	2.09	-	34.55	7.40	35.41
PK	5.777G	116.70	Inf	-Inf	110.59	3	Horizontal	201	2.09	-	34.20	7.40	35.49
AV	5.777G	104.83	Inf	-Inf	98.72	3	Horizontal	201	2.09	-	34.20	7.40	35.49
PK	5.936G	59.71	68.20	-8.49	53.00	3	Horizontal	201	2.09	-	34.74	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

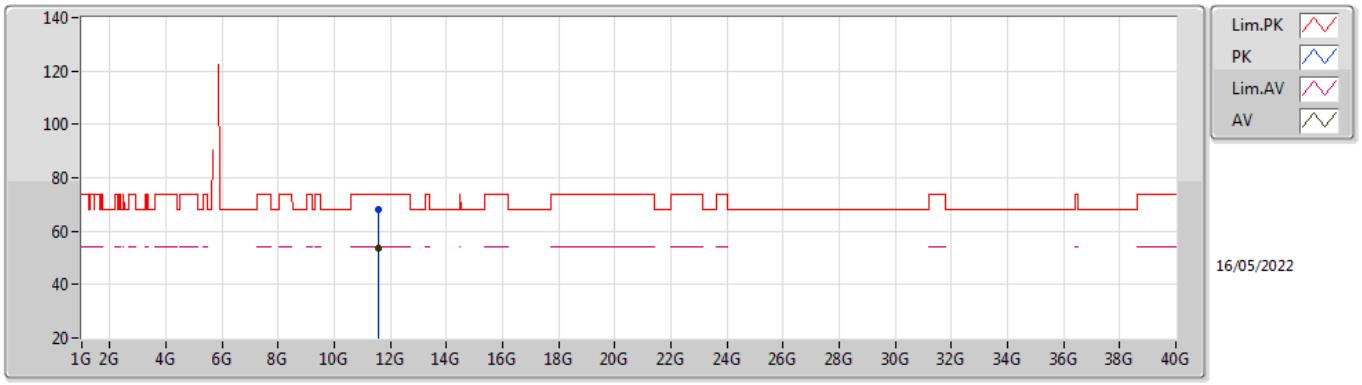


EUT X_1TX
Setting 18.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5536G	67.98	74.00	-6.02	53.63	3	Vertical	183	3.00	-	39.21	10.73	35.59
AV	11.553G	53.56	54.00	-0.44	39.21	3	Vertical	183	3.00	-	39.21	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

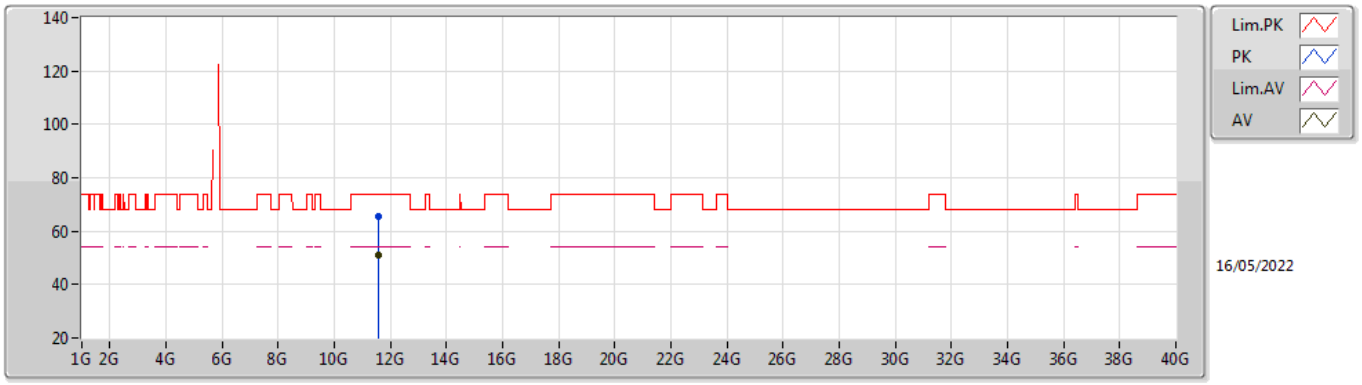


EUT X_1TX
Setting 18.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5536G	65.29	74.00	-8.71	50.94	3	Horizontal	190	2.14	-	39.21	10.73	35.59
AV	11.553G	50.98	54.00	-3.02	36.63	3	Horizontal	190	2.14	-	39.21	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

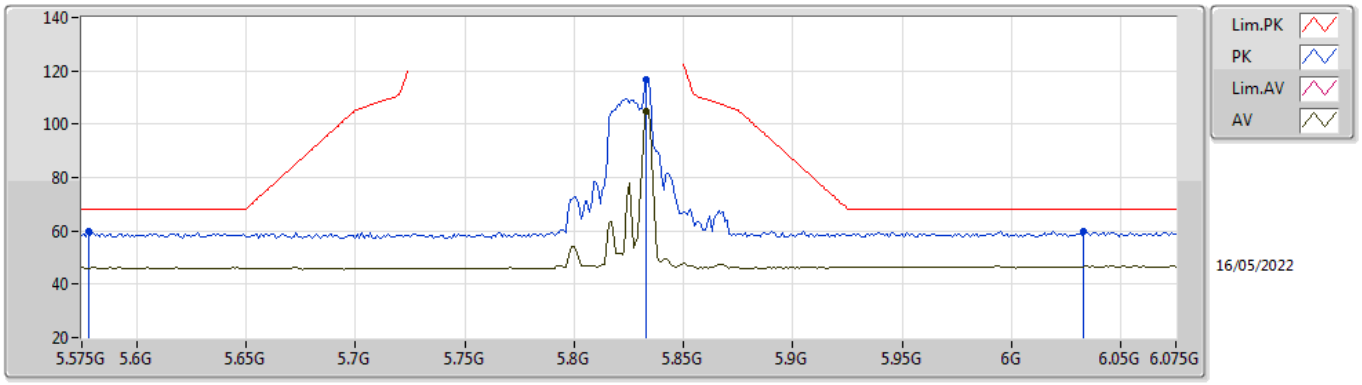


EUT X_1TX
Setting 18.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.578G	59.63	68.20	-8.57	53.04	3	Vertical	322	1.93	-	34.60	7.38	35.39
PK	5.833G	116.54	Inf	-Inf	110.36	3	Vertical	322	1.93	-	34.27	7.43	35.52
AV	5.833G	104.91	Inf	-Inf	98.73	3	Vertical	322	1.93	-	34.27	7.43	35.52
PK	6.033G	59.95	68.20	-8.25	53.05	3	Vertical	322	1.93	-	34.87	7.62	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

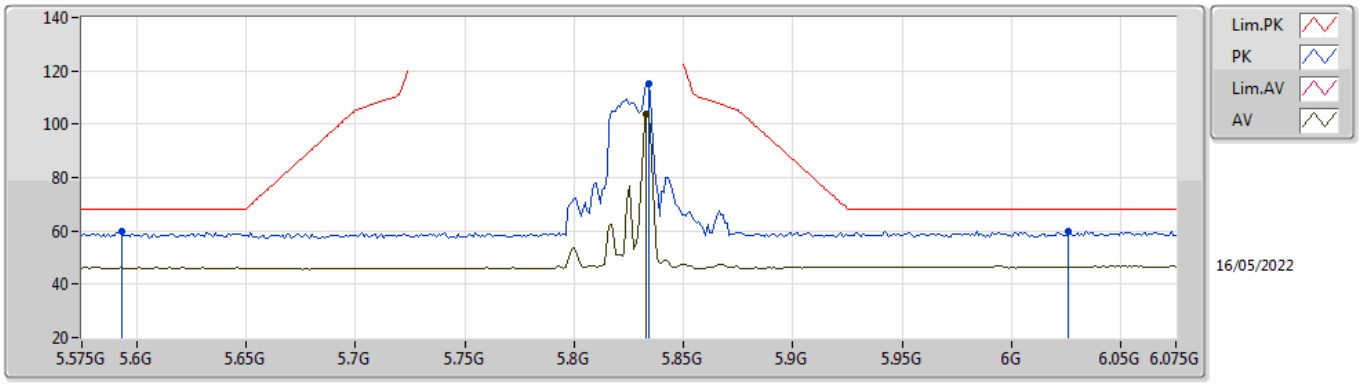


EUT X_1TX
Setting 18.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.593G	60.00	68.20	-8.20	53.41	3	Horizontal	184	1.80	-	34.60	7.39	35.40
PK	5.834G	115.21	Inf	-Inf	109.03	3	Horizontal	184	1.80	-	34.27	7.43	35.52
AV	5.833G	103.59	Inf	-Inf	97.41	3	Horizontal	184	1.80	-	34.27	7.43	35.52
PK	6.026G	59.70	68.20	-8.50	52.83	3	Horizontal	184	1.80	-	34.85	7.61	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

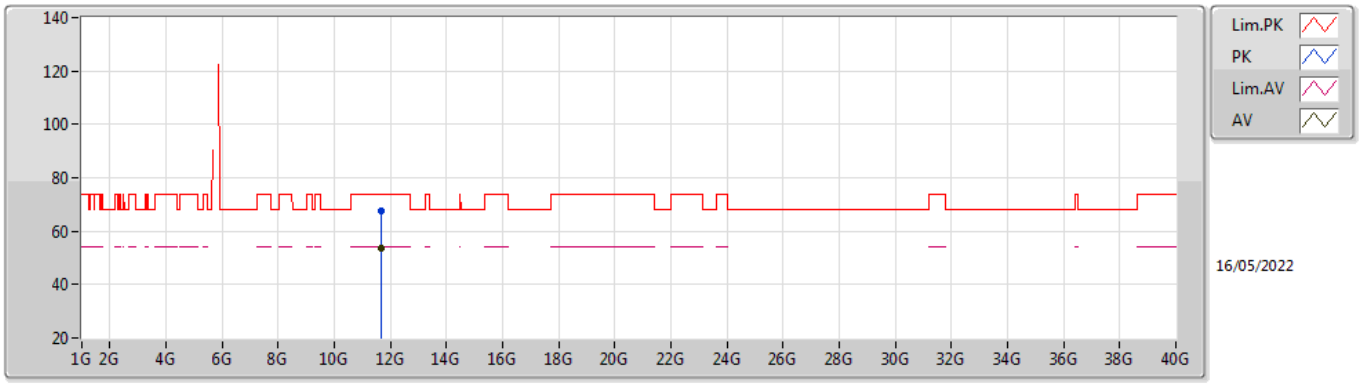


EUT X_1TX
Setting 18.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6668G	67.79	74.00	-6.21	53.20	3	Vertical	176	3.00	-	39.40	10.75	35.56
AV	11.6668G	53.52	54.00	-0.48	38.93	3	Vertical	176	3.00	-	39.40	10.75	35.56

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

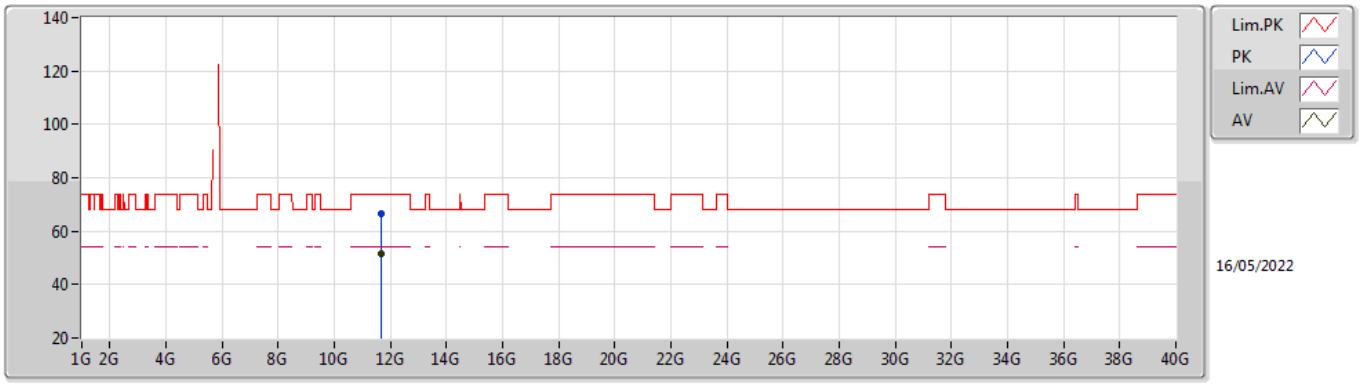

EUT X_1TX
Setting 18.5
03-D-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6676G	66.40	74.00	-7.60	51.81	3	Horizontal	192	2.07	-	39.40	10.75	35.56
AV	11.667G	51.33	54.00	-2.67	36.74	3	Horizontal	192	2.07	-	39.40	10.75	35.56

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	PK	5.7252G	68.15	68.20	-0.05	3	Vertical	321	2.00	-

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

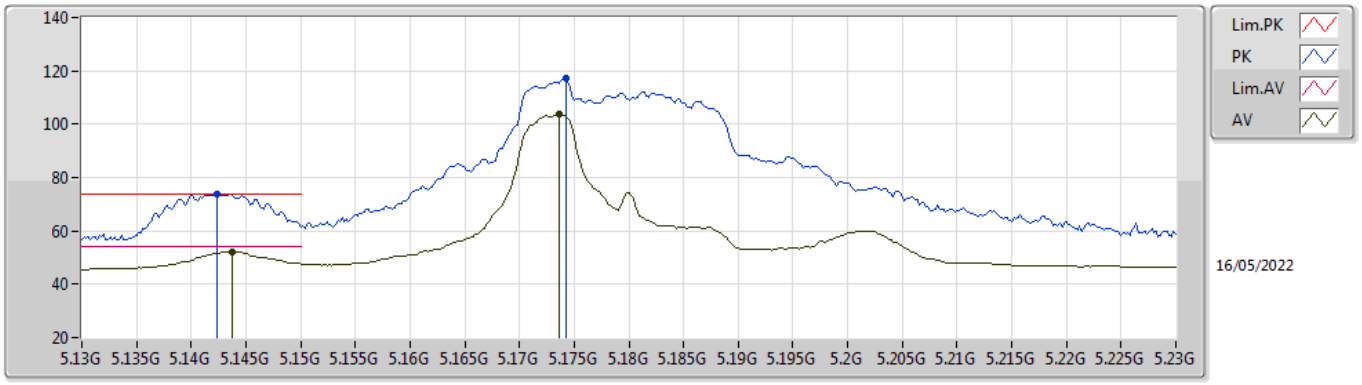


EUT X_1TX
Setting 20
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1424G	73.89	74.00	-0.11	68.08	3	Vertical	280	1.80	-	33.98	7.17	35.34
AV	5.1438G	51.98	54.00	-2.02	46.16	3	Vertical	280	1.80	-	33.99	7.17	35.34
PK	5.1742G	117.36	Inf	-Inf	111.41	3	Vertical	280	1.80	-	34.10	7.19	35.34
AV	5.1736G	103.87	Inf	-Inf	97.93	3	Vertical	280	1.80	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

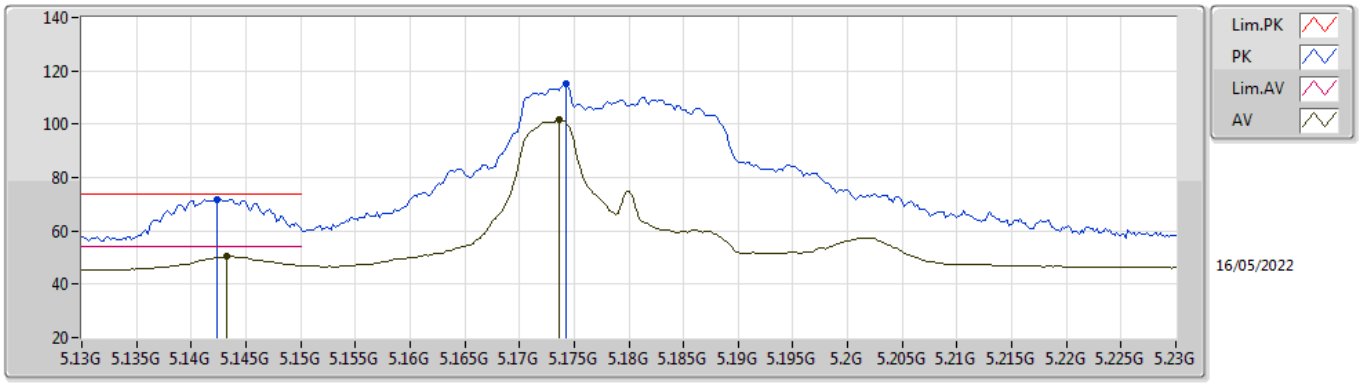


EUT X_1TX
Setting 20
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1424G	71.95	74.00	-2.05	66.14	3	Horizontal	195	1.92	-	33.98	7.17	35.34
AV	5.1432G	50.28	54.00	-3.72	44.46	3	Horizontal	195	1.92	-	33.99	7.17	35.34
PK	5.1742G	115.10	Inf	-Inf	109.15	3	Horizontal	195	1.92	-	34.10	7.19	35.34
AV	5.1736G	101.55	Inf	-Inf	95.61	3	Horizontal	195	1.92	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

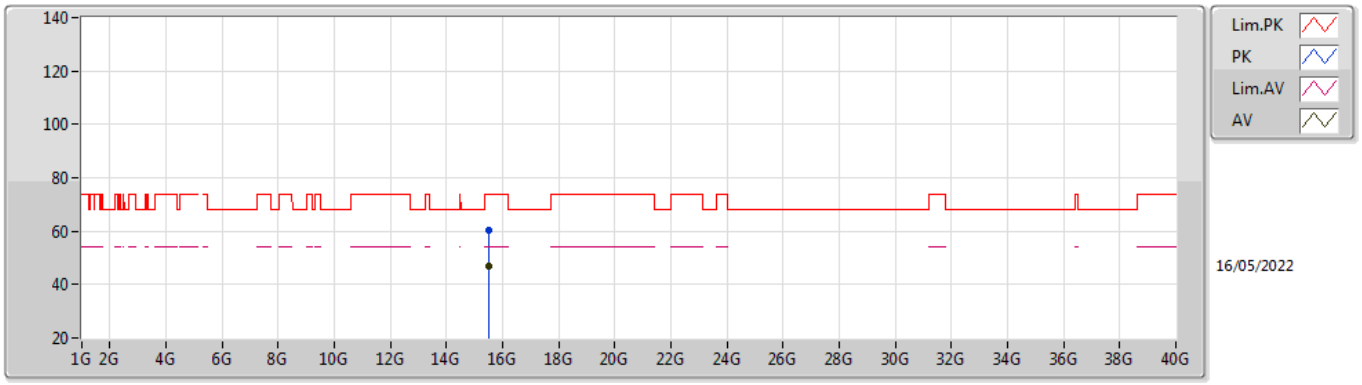


EUT X_1TX
Setting 20
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5026G	60.37	74.00	-13.63	43.91	3	Vertical	244	1.12	-	38.68	13.15	35.37
AV	15.5028G	46.74	54.00	-7.26	30.28	3	Vertical	244	1.12	-	38.68	13.15	35.37

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

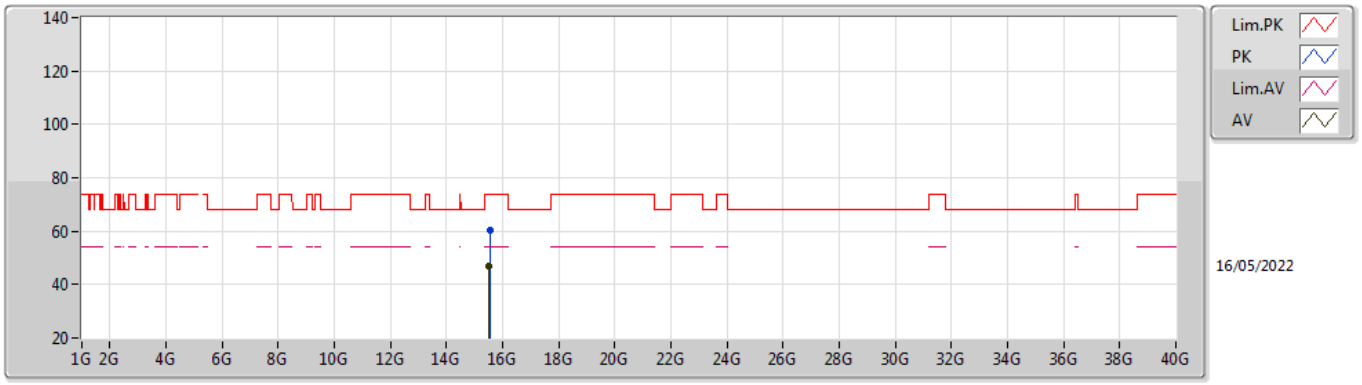


EUT X_1TX
Setting 20
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5526G	60.55	74.00	-13.45	44.45	3	Horizontal	184	2.16	-	38.33	13.18	35.41
AV	15.495G	46.74	54.00	-7.26	30.25	3	Horizontal	184	2.16	-	38.71	13.15	35.37

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

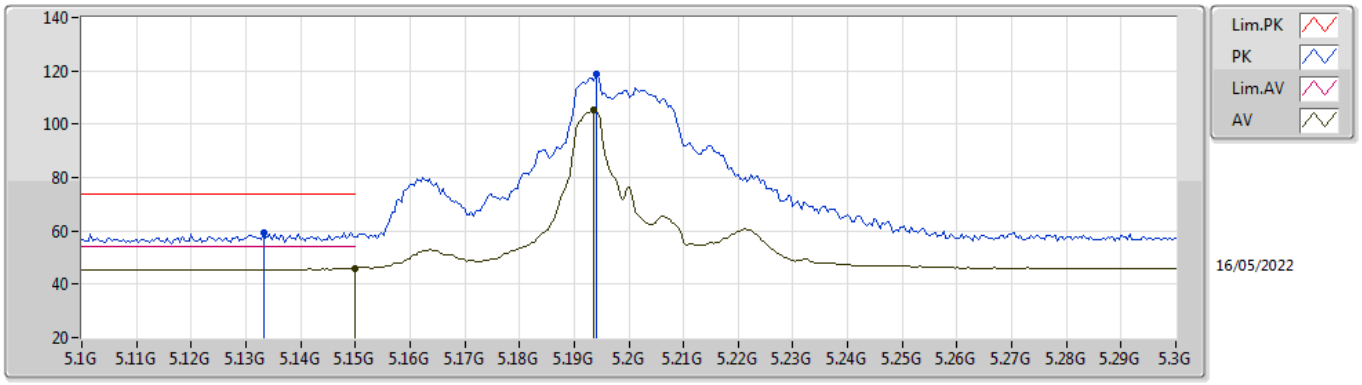


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1332G	59.44	74.00	-14.56	53.64	3	Vertical	277	1.80	-	33.97	7.17	35.34
AV	5.15G	45.97	54.00	-8.03	40.14	3	Vertical	277	1.80	-	34.00	7.17	35.34
PK	5.194G	118.73	Inf	-Inf	112.69	3	Vertical	277	1.80	-	34.18	7.20	35.34
AV	5.1936G	105.54	Inf	-Inf	99.51	3	Vertical	277	1.80	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

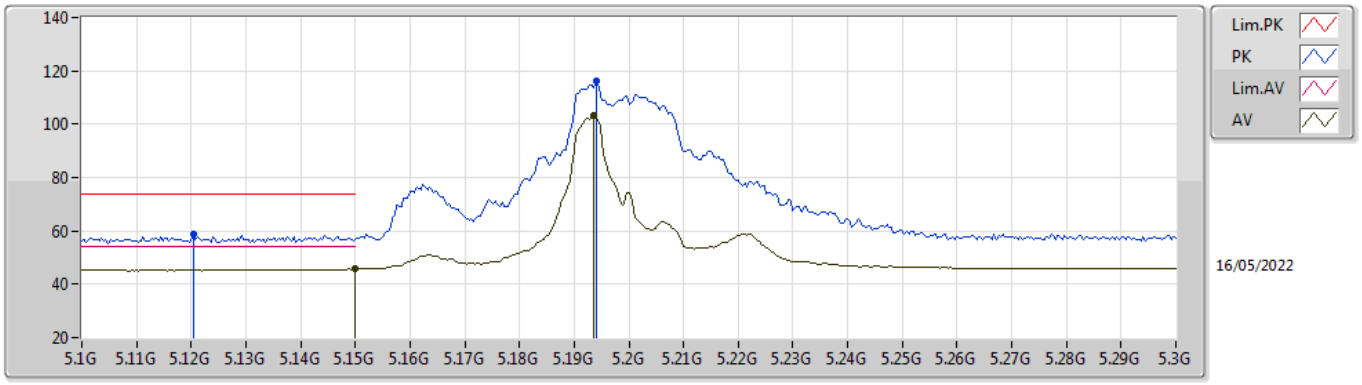


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1204G	58.73	74.00	-15.27	52.96	3	Horizontal	198	2.13	-	33.94	7.16	35.33
AV	5.15G	45.67	54.00	-8.33	39.84	3	Horizontal	198	2.13	-	34.00	7.17	35.34
PK	5.194G	116.17	Inf	-Inf	110.13	3	Horizontal	198	2.13	-	34.18	7.20	35.34
AV	5.1936G	103.04	Inf	-Inf	97.01	3	Horizontal	198	2.13	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

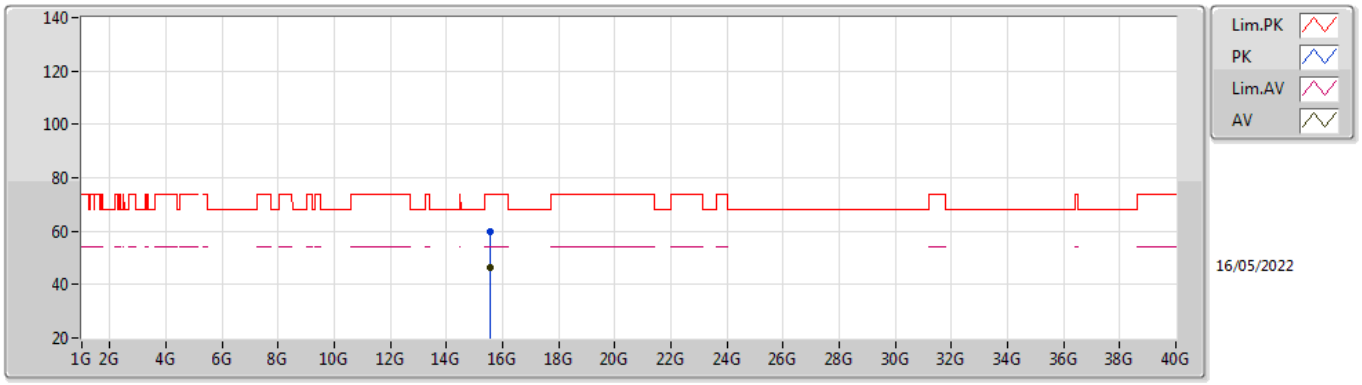


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5562G	59.79	74.00	-14.21	43.72	3	Vertical	317	1.12	-	38.31	13.18	35.42
AV	15.5638G	46.53	54.00	-7.47	30.52	3	Vertical	317	1.12	-	38.25	13.18	35.42

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

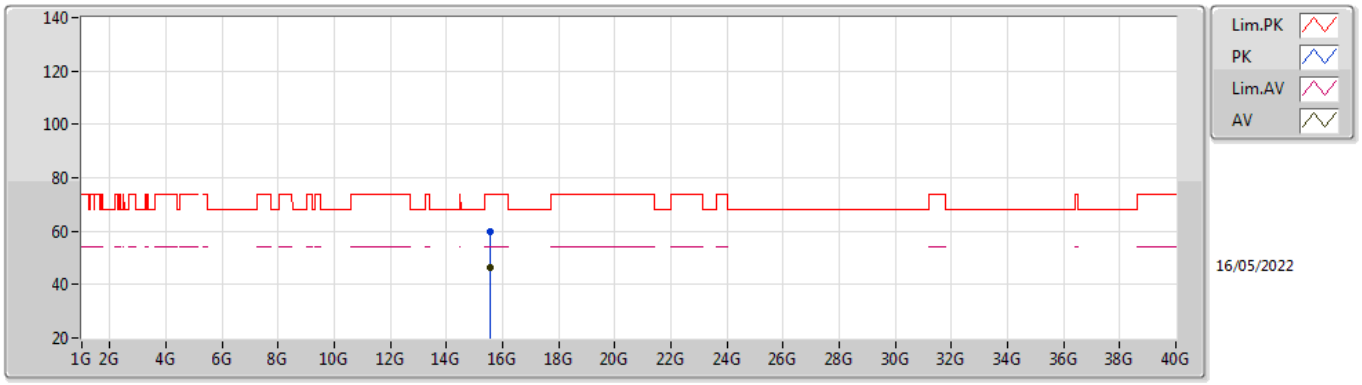


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5734G	59.57	74.00	-14.43	43.62	3	Horizontal	212	2.82	-	38.19	13.19	35.43
AV	15.571G	46.52	54.00	-7.48	30.56	3	Horizontal	212	2.82	-	38.20	13.19	35.43

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

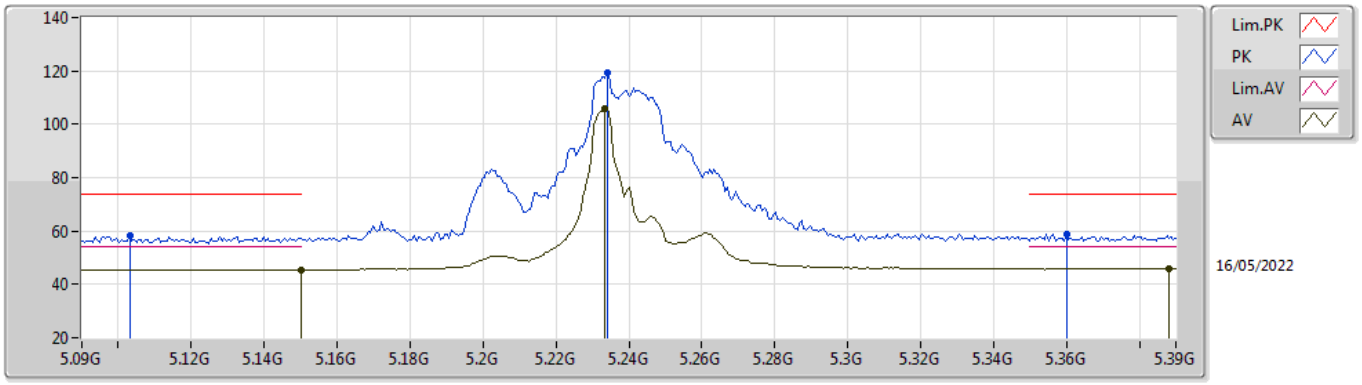


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1032G	58.25	74.00	-15.75	52.52	3	Vertical	273	1.98	-	33.91	7.15	35.33
AV	5.15G	45.50	54.00	-8.50	39.67	3	Vertical	273	1.98	-	34.00	7.17	35.34
PK	5.234G	119.28	Inf	-Inf	113.08	3	Vertical	273	1.98	-	34.34	7.20	35.34
AV	5.2334G	106.10	Inf	-Inf	99.91	3	Vertical	273	1.98	-	34.33	7.20	35.34
PK	5.36G	58.67	74.00	-15.33	52.29	3	Vertical	273	1.98	-	34.52	7.20	35.34
AV	5.3882G	46.12	54.00	-7.88	39.69	3	Vertical	273	1.98	-	34.58	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

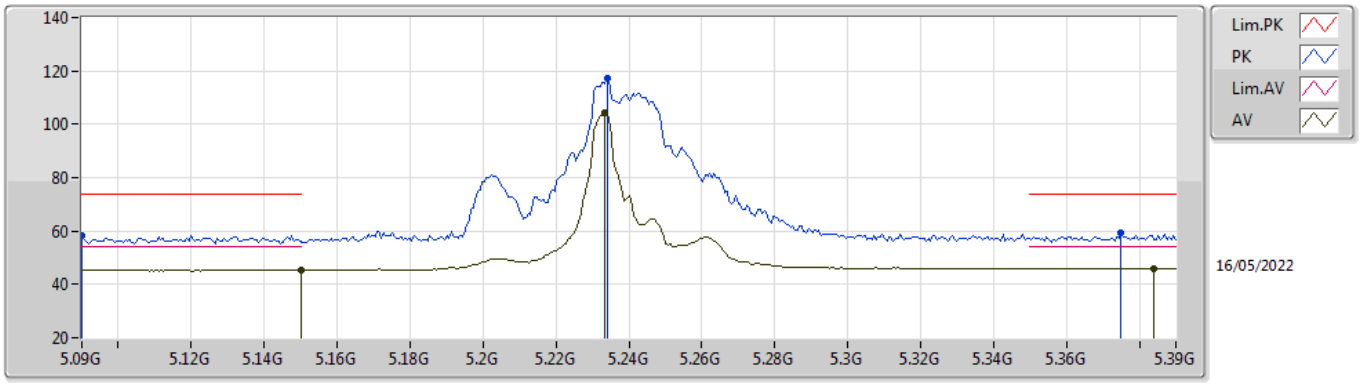


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.09G	58.05	74.00	-15.95	52.36	3	Horizontal	338	2.23	-	33.88	7.14	35.33
AV	5.15G	45.41	54.00	-8.59	39.58	3	Horizontal	338	2.23	-	34.00	7.17	35.34
PK	5.234G	117.32	Inf	-Inf	111.12	3	Horizontal	338	2.23	-	34.34	7.20	35.34
AV	5.2334G	104.26	Inf	-Inf	98.07	3	Horizontal	338	2.23	-	34.33	7.20	35.34
PK	5.375G	59.11	74.00	-14.89	52.70	3	Horizontal	338	2.23	-	34.55	7.20	35.34
AV	5.384G	46.02	54.00	-7.98	39.60	3	Horizontal	338	2.23	-	34.57	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

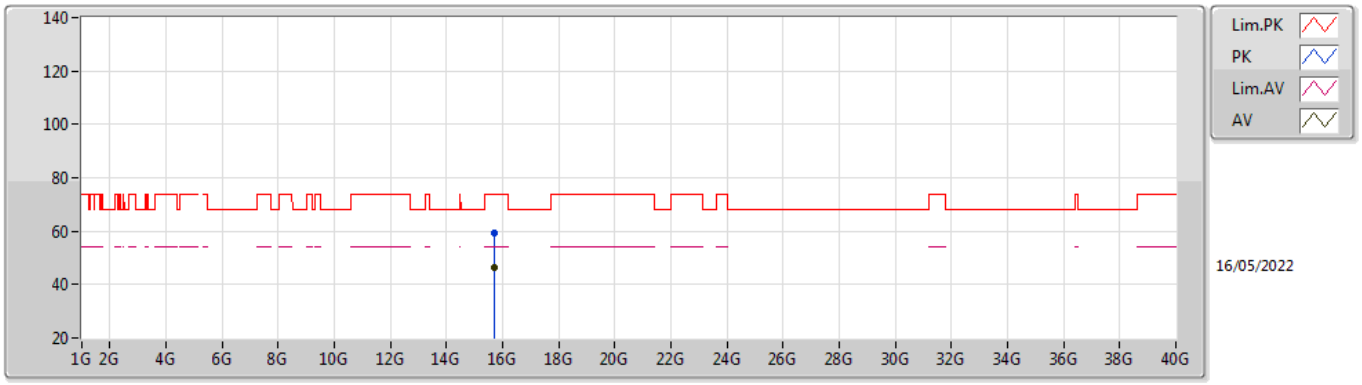


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6982G	59.33	74.00	-14.67	44.11	3	Vertical	264	2.60	-	37.51	13.25	35.54
AV	15.7156G	46.38	54.00	-7.62	31.11	3	Vertical	264	2.60	-	37.56	13.26	35.55

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

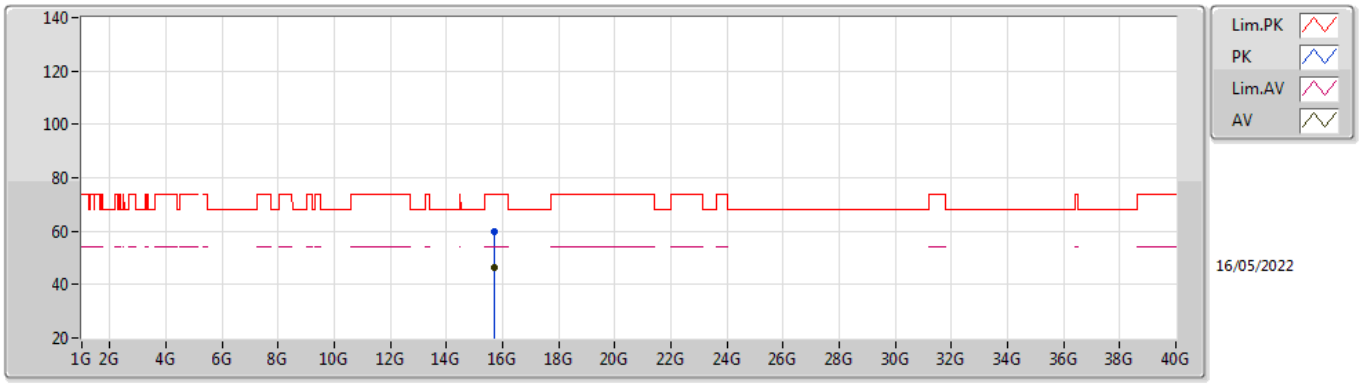


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7214G	59.98	74.00	-14.02	44.69	3	Horizontal	55	2.11	-	37.59	13.26	35.56
AV	15.7184G	46.26	54.00	-7.74	30.98	3	Horizontal	55	2.11	-	37.57	13.26	35.55

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

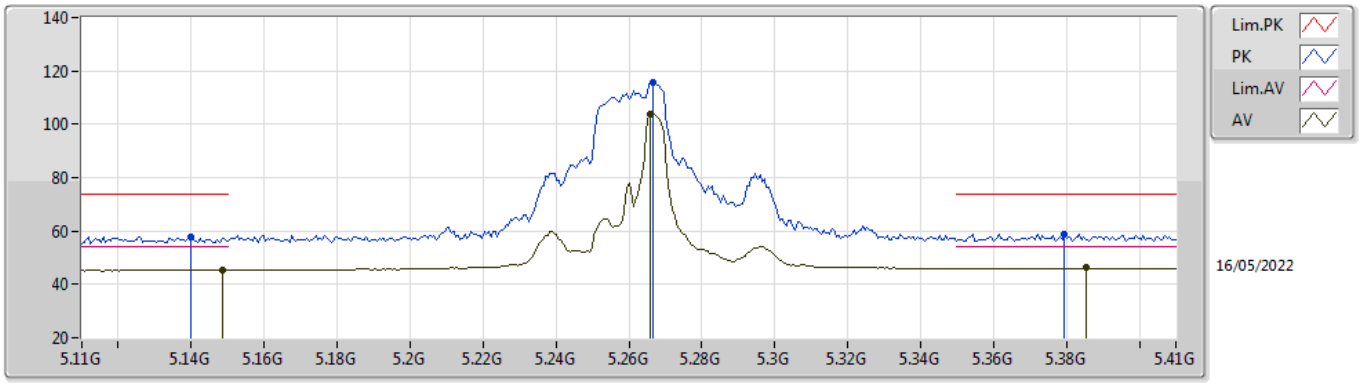


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.14G	57.86	74.00	-16.14	52.05	3	Vertical	287	1.08	-	33.98	7.17	35.34
AV	5.1484G	45.39	54.00	-8.61	39.56	3	Vertical	287	1.08	-	34.00	7.17	35.34
PK	5.2666G	115.86	Inf	-Inf	109.57	3	Vertical	287	1.08	-	34.43	7.20	35.34
AV	5.266G	104.02	Inf	-Inf	97.73	3	Vertical	287	1.08	-	34.43	7.20	35.34
PK	5.3794G	58.89	74.00	-15.11	52.48	3	Vertical	287	1.08	-	34.56	7.20	35.35
AV	5.3854G	46.16	54.00	-7.84	39.74	3	Vertical	287	1.08	-	34.57	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

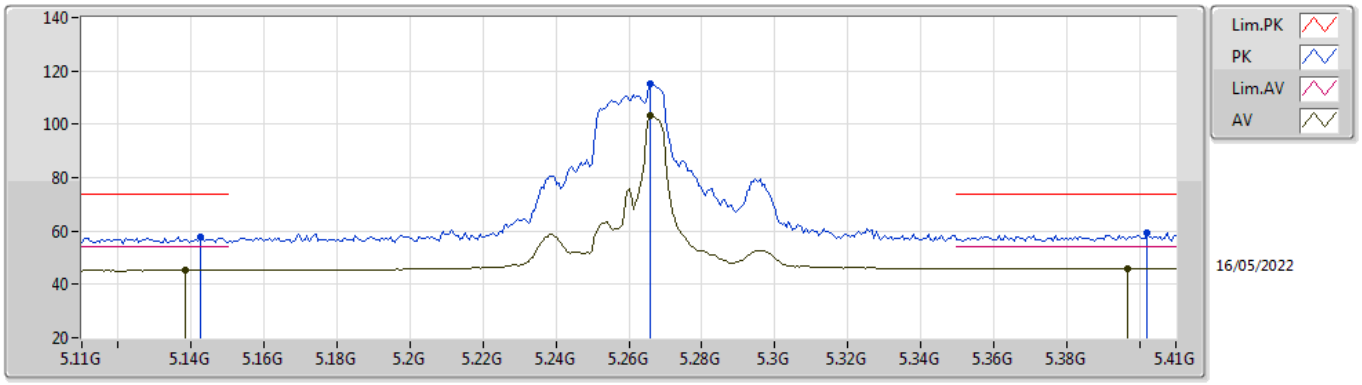


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1424G	57.63	74.00	-16.37	51.82	3	Horizontal	337	2.21	-	33.98	7.17	35.34
AV	5.1382G	45.36	54.00	-8.64	39.55	3	Horizontal	337	2.21	-	33.98	7.17	35.34
PK	5.266G	115.15	Inf	-Inf	108.86	3	Horizontal	337	2.21	-	34.43	7.20	35.34
AV	5.266G	103.15	Inf	-Inf	96.86	3	Horizontal	337	2.21	-	34.43	7.20	35.34
PK	5.4022G	59.50	74.00	-14.50	53.05	3	Horizontal	337	2.21	-	34.60	7.20	35.35
AV	5.3968G	46.09	54.00	-7.91	39.65	3	Horizontal	337	2.21	-	34.59	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

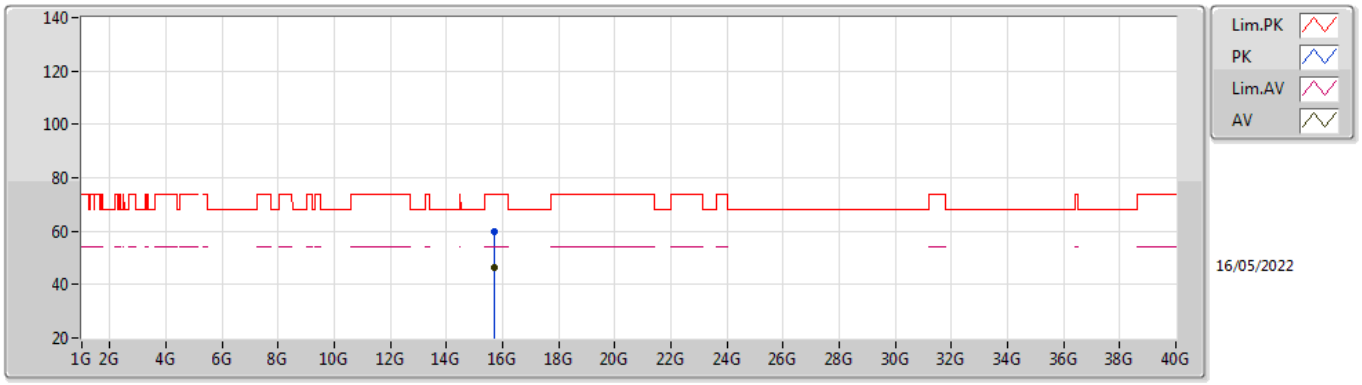


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7158G	59.66	74.00	-14.34	44.39	3	Vertical	288	1.42	-	37.56	13.26	35.55
AV	15.7004G	46.45	54.00	-7.55	31.24	3	Vertical	288	1.42	-	37.50	13.25	35.54

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

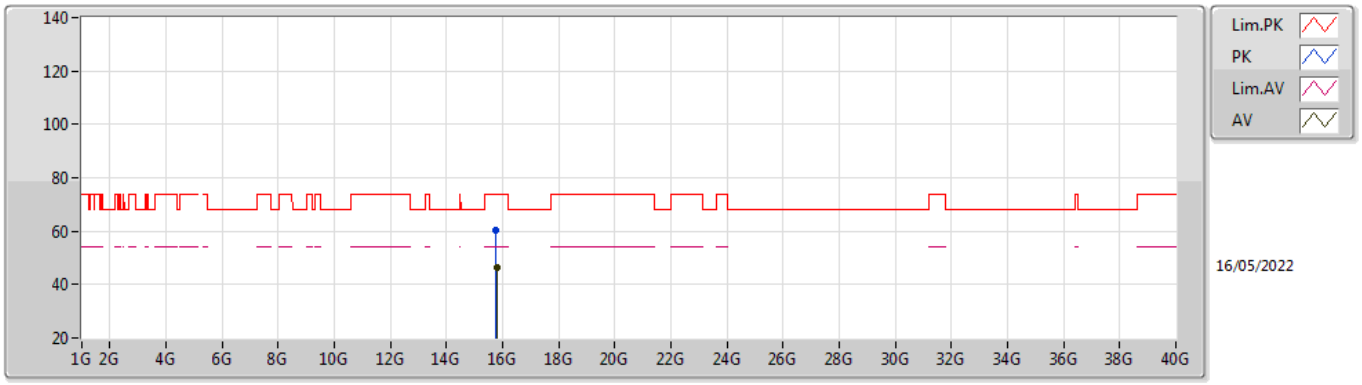


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7744G	60.14	74.00	-13.86	44.65	3	Horizontal	176	1.80	-	37.80	13.29	35.60
AV	15.791G	46.46	54.00	-7.54	30.91	3	Horizontal	176	1.80	-	37.86	13.30	35.61

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

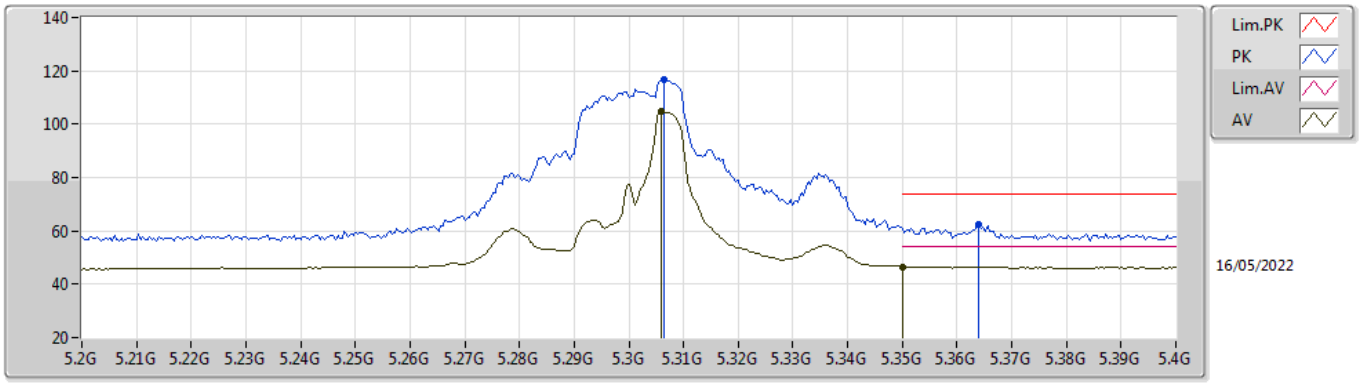


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3064G	116.84	Inf	-Inf	110.48	3	Vertical	275	1.00	-	34.50	7.20	35.34
AV	5.306G	104.96	Inf	-Inf	98.60	3	Vertical	275	1.00	-	34.50	7.20	35.34
PK	5.364G	62.38	74.00	-11.62	55.99	3	Vertical	275	1.00	-	34.53	7.20	35.34
AV	5.35G	46.52	54.00	-7.48	40.16	3	Vertical	275	1.00	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

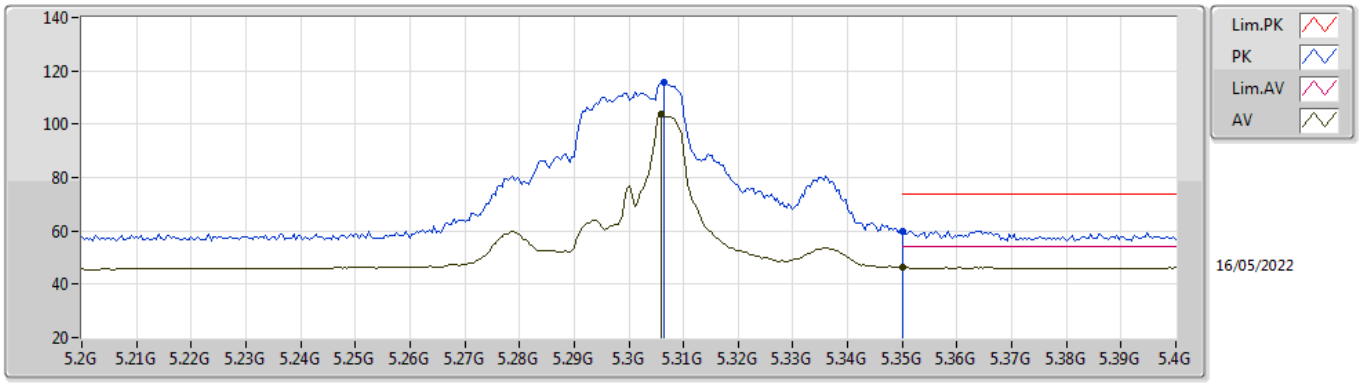


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3064G	115.72	Inf	-Inf	109.36	3	Horizontal	343	1.97	-	34.50	7.20	35.34
AV	5.306G	103.88	Inf	-Inf	97.52	3	Horizontal	343	1.97	-	34.50	7.20	35.34
PK	5.35G	60.03	74.00	-13.97	53.67	3	Horizontal	343	1.97	-	34.50	7.20	35.34
AV	5.35G	46.43	54.00	-7.57	40.07	3	Horizontal	343	1.97	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

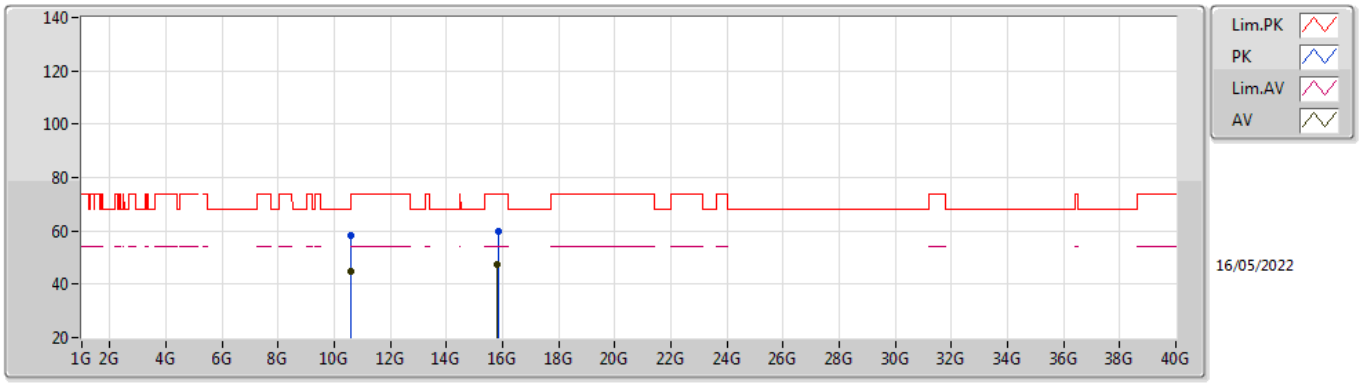


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6126G	58.31	74.00	-15.69	44.86	3	Vertical	287	1.80	-	38.23	10.59	35.37
AV	10.6138G	45.00	54.00	-9.00	31.55	3	Vertical	287	1.80	-	38.23	10.59	35.37
PK	15.8394G	59.87	74.00	-14.13	44.43	3	Vertical	168	1.80	-	37.78	13.32	35.66
AV	15.821G	47.25	54.00	-6.75	31.74	3	Vertical	168	1.80	-	37.84	13.31	35.64

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

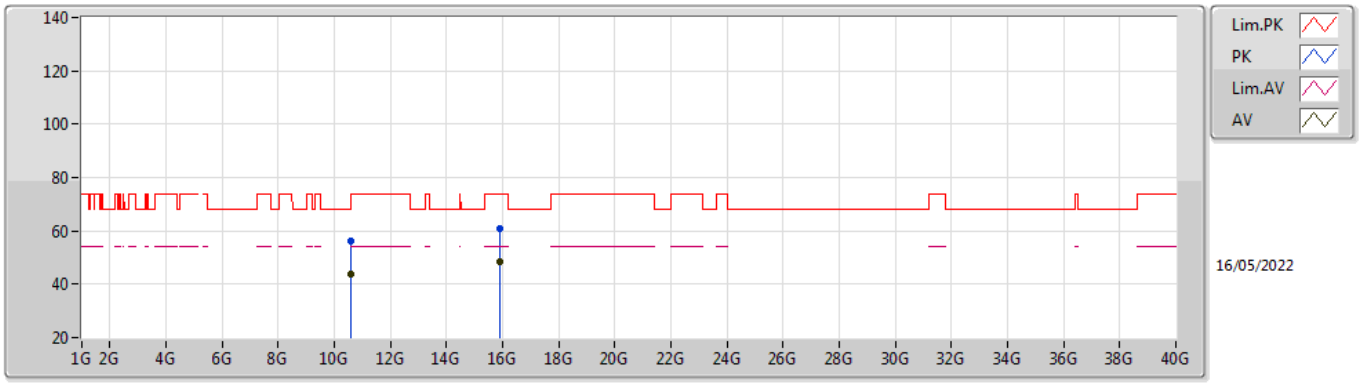


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6138G	56.46	74.00	-17.54	43.01	3	Horizontal	235	1.80	-	38.23	10.59	35.37
AV	10.6138G	43.57	54.00	-10.43	30.12	3	Horizontal	235	1.80	-	38.23	10.59	35.37
PK	15.921G	60.86	74.00	-13.14	45.66	3	Horizontal	176	1.80	-	37.56	13.36	35.72
AV	15.9213G	48.36	54.00	-5.64	33.16	3	Horizontal	176	1.80	-	37.56	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

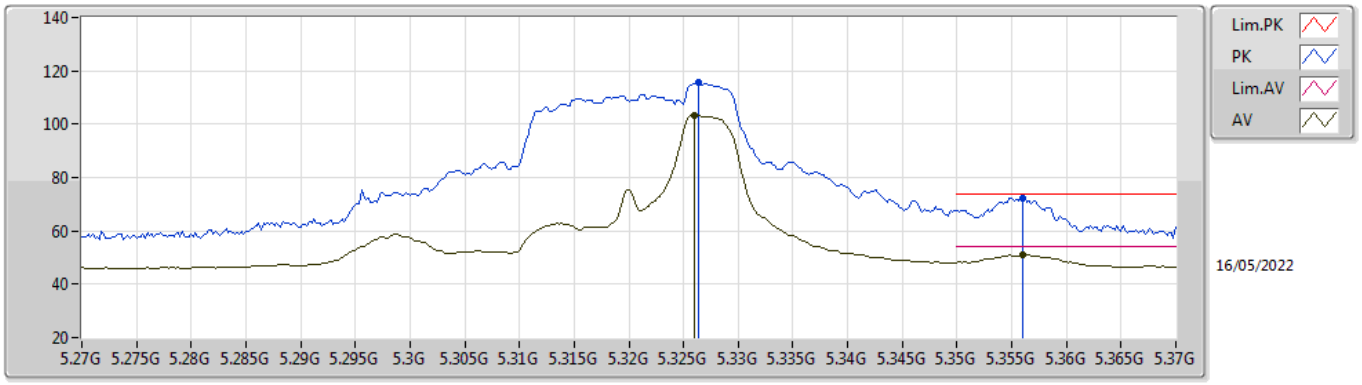


EUT X_1TX
Setting 20
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3264G	115.52	Inf	-Inf	109.16	3	Vertical	276	1.94	-	34.50	7.20	35.34
AV	5.326G	103.52	Inf	-Inf	97.16	3	Vertical	276	1.94	-	34.50	7.20	35.34
PK	5.356G	72.47	74.00	-1.53	66.10	3	Vertical	276	1.94	-	34.51	7.20	35.34
AV	5.356G	51.03	54.00	-2.97	44.66	3	Vertical	276	1.94	-	34.51	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

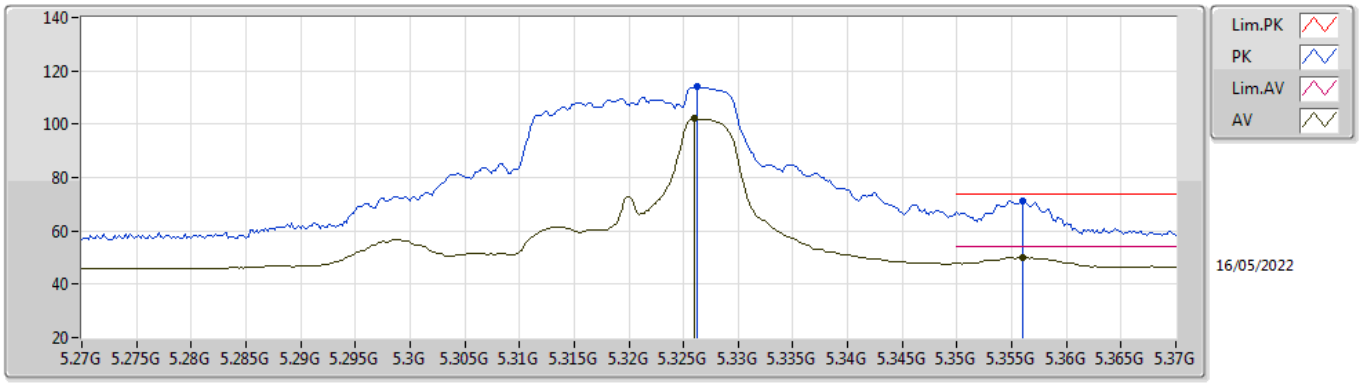


EUT X_1TX
Setting 20
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3262G	114.19	Inf	-Inf	107.83	3	Horizontal	352	1.94	-	34.50	7.20	35.34
AV	5.326G	102.19	Inf	-Inf	95.83	3	Horizontal	352	1.94	-	34.50	7.20	35.34
PK	5.356G	71.38	74.00	-2.62	65.01	3	Horizontal	352	1.94	-	34.51	7.20	35.34
AV	5.356G	49.98	54.00	-4.02	43.61	3	Horizontal	352	1.94	-	34.51	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

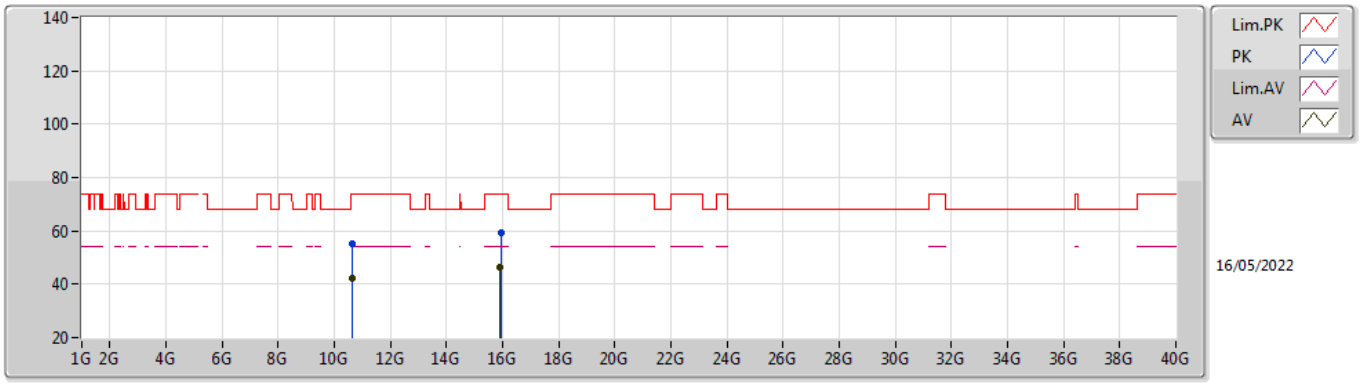


EUT X_1TX
Setting 20
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6514G	55.29	74.00	-18.71	41.73	3	Vertical	343	1.14	-	38.30	10.60	35.34
AV	10.6541G	42.44	54.00	-11.56	28.87	3	Vertical	343	1.14	-	38.31	10.60	35.34
PK	15.9555G	59.14	74.00	-14.86	44.02	3	Vertical	87	1.30	-	37.49	13.38	35.75
AV	15.8874G	46.31	54.00	-7.69	31.03	3	Vertical	87	1.30	-	37.64	13.34	35.70

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

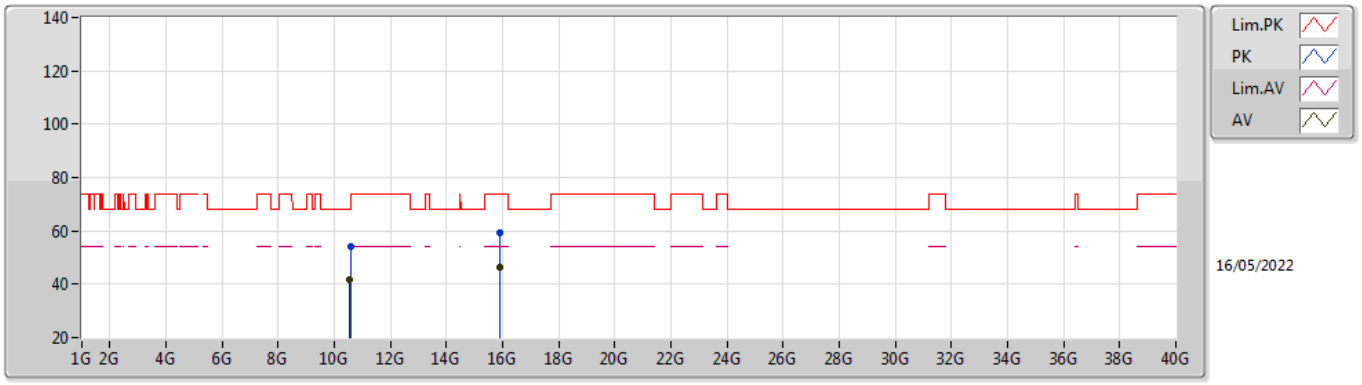


EUT X_1TX
Setting 20
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.5674G	54.27	68.20	-13.93	40.89	3	Horizontal	225	2.39	-	38.20	10.59	35.41
AV	10.5538G	41.58	Inf	-Inf	28.22	3	Horizontal	225	2.39	-	38.20	10.58	35.42
PK	15.9033G	59.31	74.00	-14.69	44.08	3	Horizontal	99	2.88	-	37.59	13.35	35.71
AV	15.8916G	46.35	54.00	-7.65	31.07	3	Horizontal	99	2.88	-	37.63	13.35	35.70

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

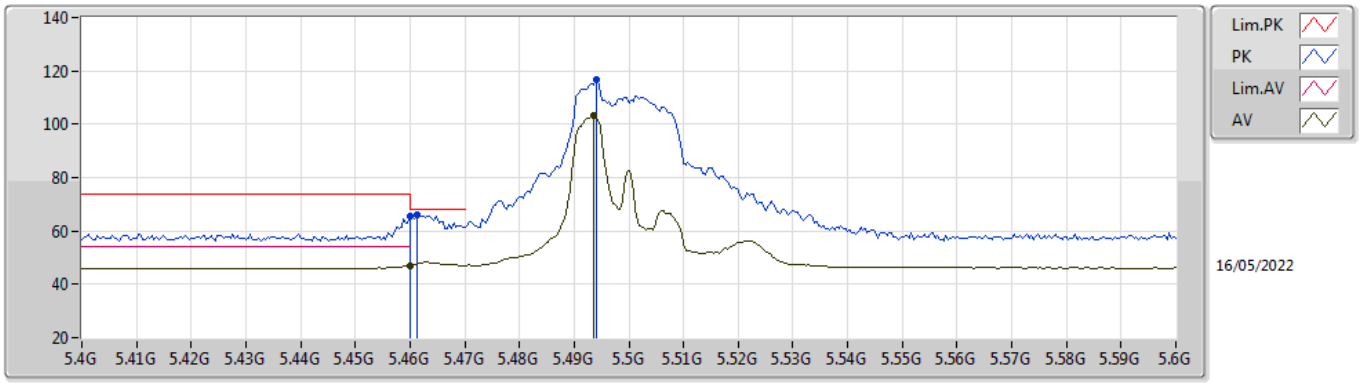


EUT X_1TX
Setting 20
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.46G	65.30	74.00	-8.70	58.87	3	Vertical	280	1.96	-	34.52	7.26	35.35
AV	5.46G	46.93	54.00	-7.07	40.50	3	Vertical	280	1.96	-	34.52	7.26	35.35
PK	5.4612G	65.93	68.20	-2.27	59.50	3	Vertical	280	1.96	-	34.52	7.26	35.35
PK	5.494G	116.88	Inf	-Inf	110.35	3	Vertical	280	1.96	-	34.59	7.29	35.35
AV	5.4936G	103.27	Inf	-Inf	96.74	3	Vertical	280	1.96	-	34.59	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

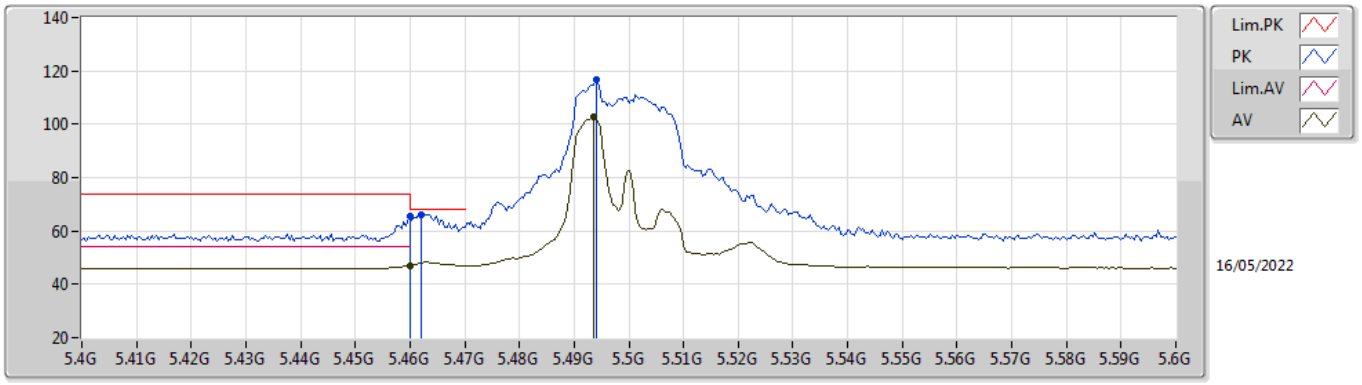


EUT X_1TX
Setting 20
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.46G	65.57	74.00	-8.43	59.14	3	Horizontal	360	2.08	-	34.52	7.26	35.35
AV	5.46G	46.90	54.00	-7.10	40.47	3	Horizontal	360	2.08	-	34.52	7.26	35.35
PK	5.462G	66.20	68.20	-2.00	59.77	3	Horizontal	360	2.08	-	34.52	7.26	35.35
PK	5.494G	116.48	Inf	-Inf	109.95	3	Horizontal	360	2.08	-	34.59	7.29	35.35
AV	5.4936G	102.61	Inf	-Inf	96.08	3	Horizontal	360	2.08	-	34.59	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

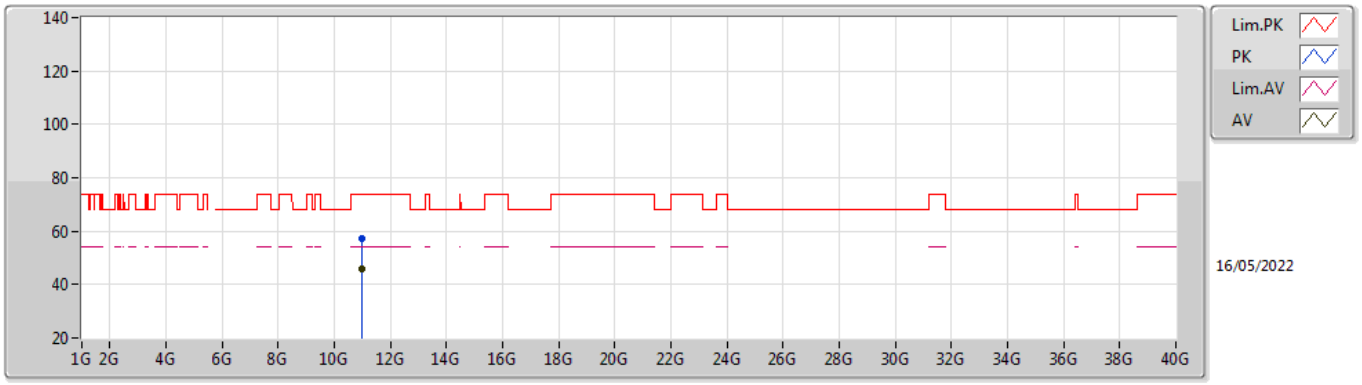


EUT X_1TX
Setting 20
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9865G	57.39	74.00	-16.61	43.40	3	Vertical	176	1.12	-	38.39	10.65	35.05
AV	10.9862G	45.72	54.00	-8.28	31.73	3	Vertical	176	1.12	-	38.39	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

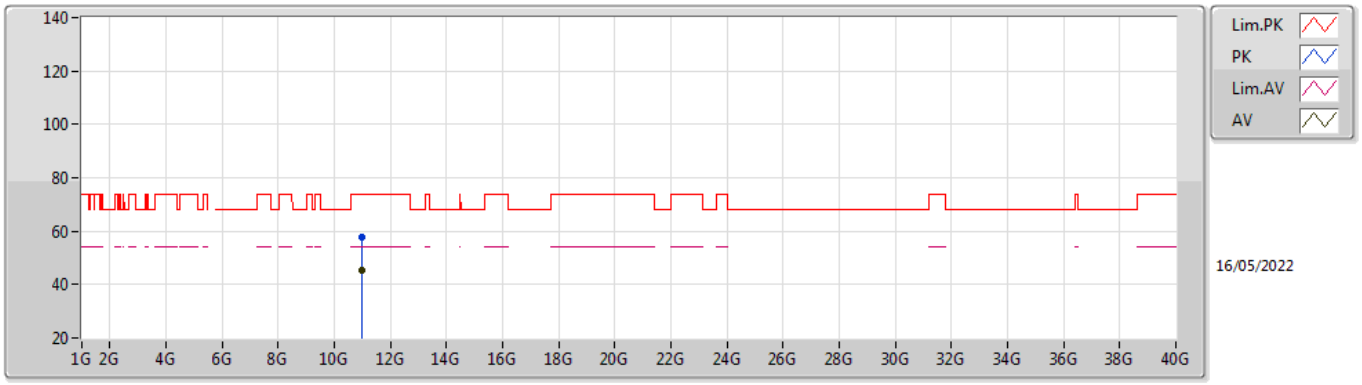


EUT X_1TX
Setting 20
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9862G	57.89	74.00	-16.11	43.90	3	Horizontal	155	1.01	-	38.39	10.65	35.05
AV	10.9862G	45.30	54.00	-8.70	31.31	3	Horizontal	155	1.01	-	38.39	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

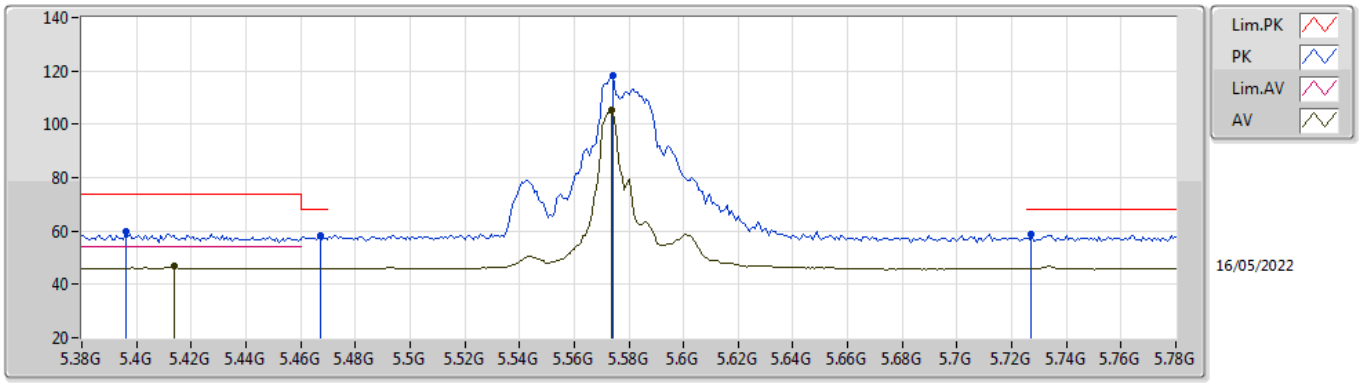


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.396G	59.88	74.00	-14.12	53.44	3	Vertical	270	1.00	-	34.59	7.20	35.35
AV	5.4136G	46.66	54.00	-7.34	40.23	3	Vertical	270	1.00	-	34.57	7.21	35.35
PK	5.4672G	58.46	68.20	-9.74	52.01	3	Vertical	270	1.00	-	34.53	7.27	35.35
PK	5.5744G	118.49	Inf	-Inf	111.91	3	Vertical	270	1.00	-	34.60	7.37	35.39
AV	5.5736G	105.42	Inf	-Inf	98.84	3	Vertical	270	1.00	-	34.60	7.37	35.39
PK	5.7272G	58.67	68.20	-9.53	52.48	3	Vertical	270	1.00	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

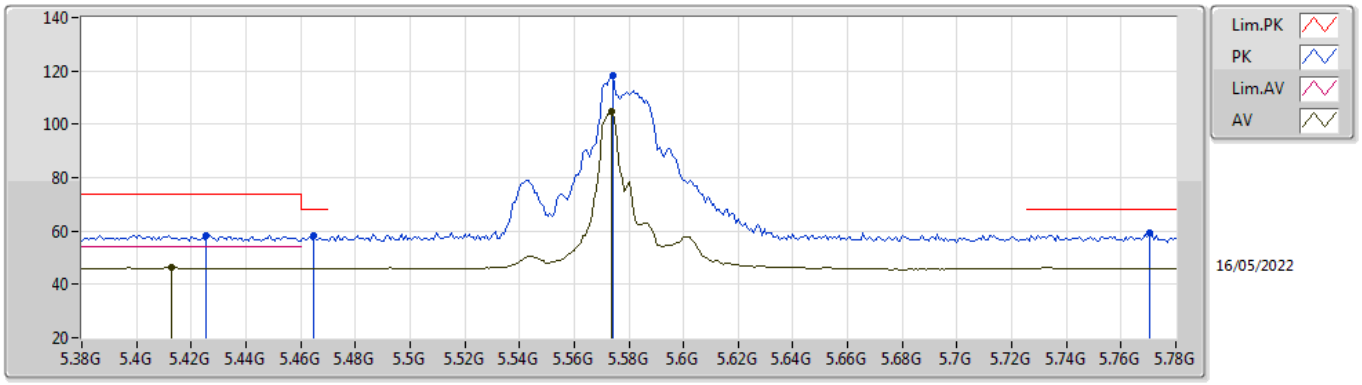


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4256G	58.52	74.00	-15.48	52.09	3	Horizontal	341	1.83	-	34.55	7.23	35.35
AV	5.4128G	46.57	54.00	-7.43	40.14	3	Horizontal	341	1.83	-	34.57	7.21	35.35
PK	5.4648G	58.33	68.20	-9.87	51.89	3	Horizontal	341	1.83	-	34.53	7.26	35.35
PK	5.5744G	118.19	Inf	-Inf	111.61	3	Horizontal	341	1.83	-	34.60	7.37	35.39
AV	5.5736G	105.01	Inf	-Inf	98.43	3	Horizontal	341	1.83	-	34.60	7.37	35.39
PK	5.7704G	59.25	68.20	-8.95	53.14	3	Horizontal	341	1.83	-	34.20	7.40	35.49

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

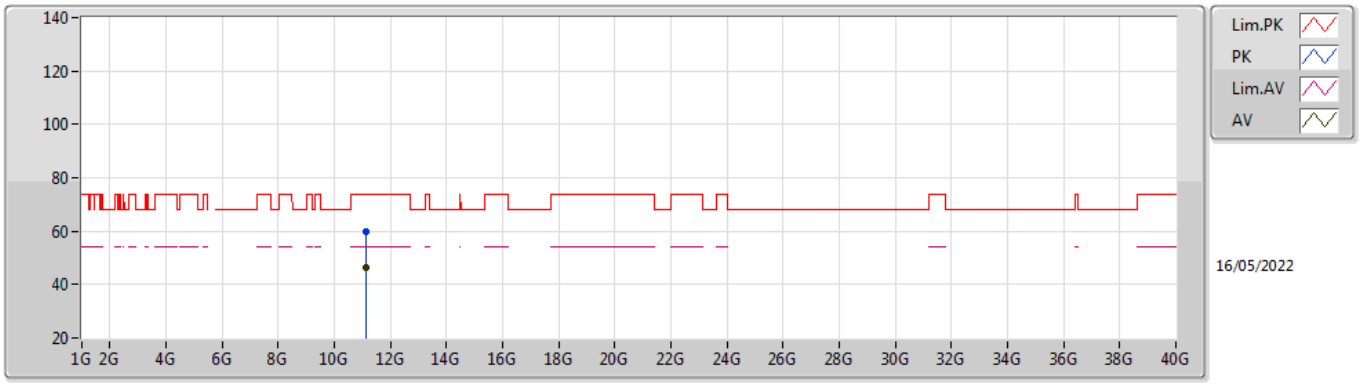


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1459G	59.60	74.00	-14.40	45.58	3	Vertical	278	1.78	-	38.55	10.67	35.20
AV	11.1462G	46.22	54.00	-7.78	32.20	3	Vertical	278	1.78	-	38.55	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

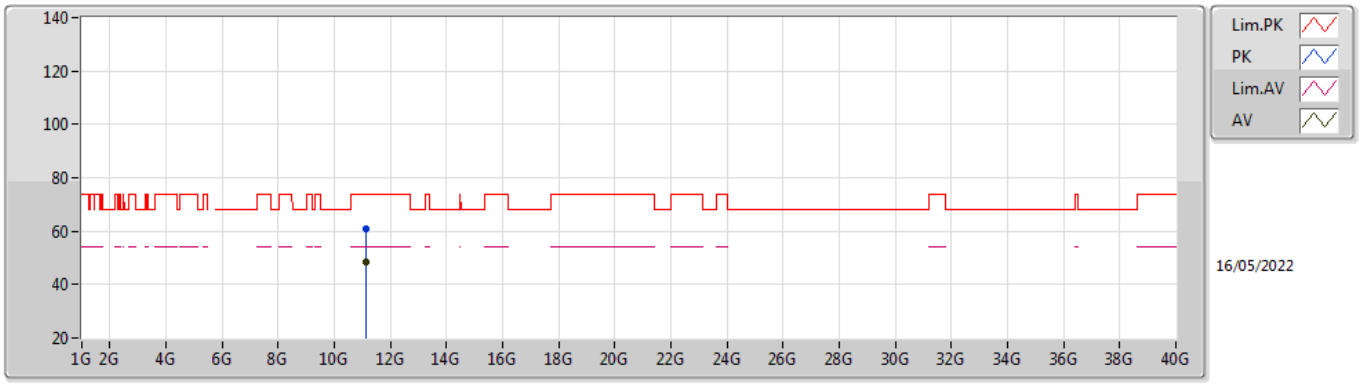


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1462G	60.89	74.00	-13.11	46.87	3	Horizontal	254	1.80	-	38.55	10.67	35.20
AV	11.1462G	48.28	54.00	-5.72	34.26	3	Horizontal	254	1.80	-	38.55	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

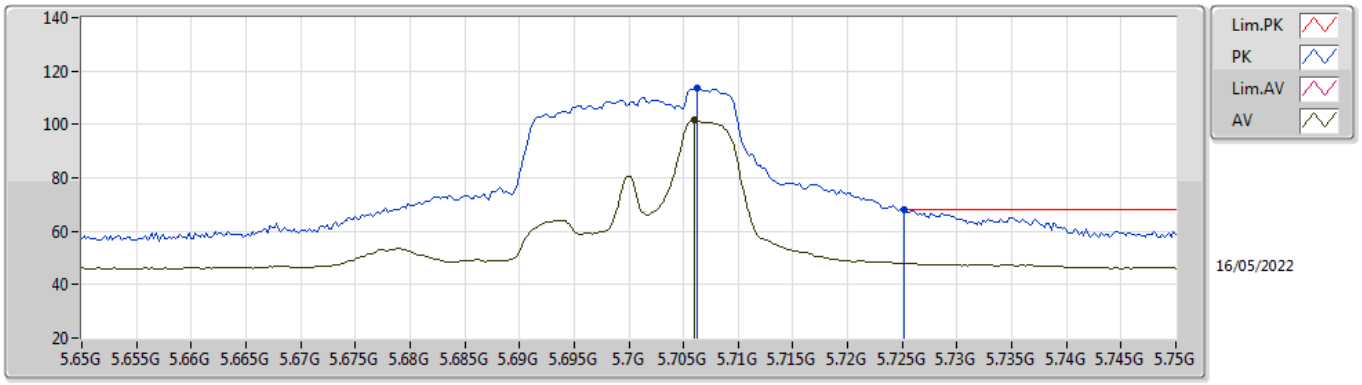


EUT X_1TX
Setting 17.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7062G	113.71	Inf	-Inf	107.47	3	Vertical	321	2.00	-	34.29	7.40	35.45
AV	5.706G	101.55	Inf	-Inf	95.31	3	Vertical	321	2.00	-	34.29	7.40	35.45
PK	5.7252G	68.15	68.20	-0.05	61.96	3	Vertical	321	2.00	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

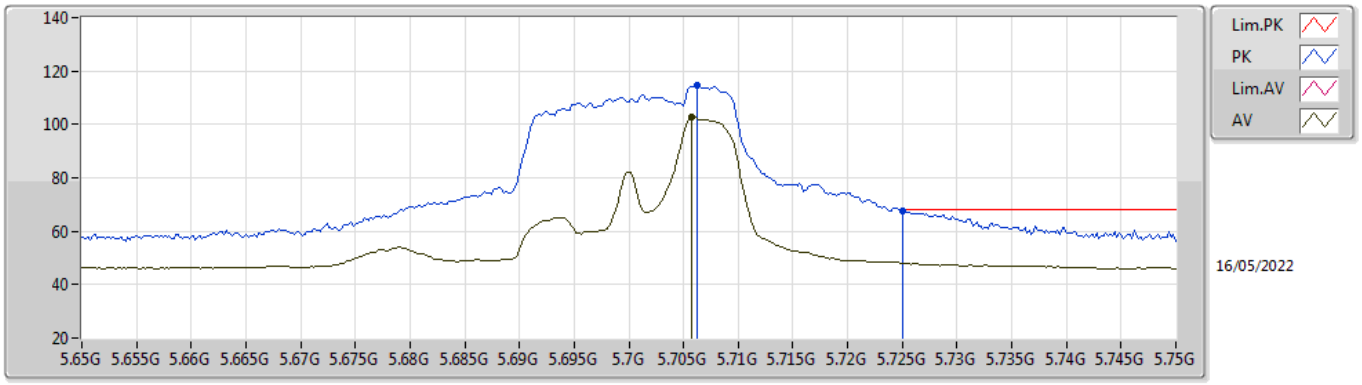


EUT X_1TX
Setting 17.75
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7062G	114.53	Inf	-Inf	108.29	3	Horizontal	2	1.96	-	34.29	7.40	35.45
AV	5.7058G	102.59	Inf	-Inf	96.35	3	Horizontal	2	1.96	-	34.29	7.40	35.45
PK	5.725G	67.44	68.20	-0.76	61.25	3	Horizontal	2	1.96	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

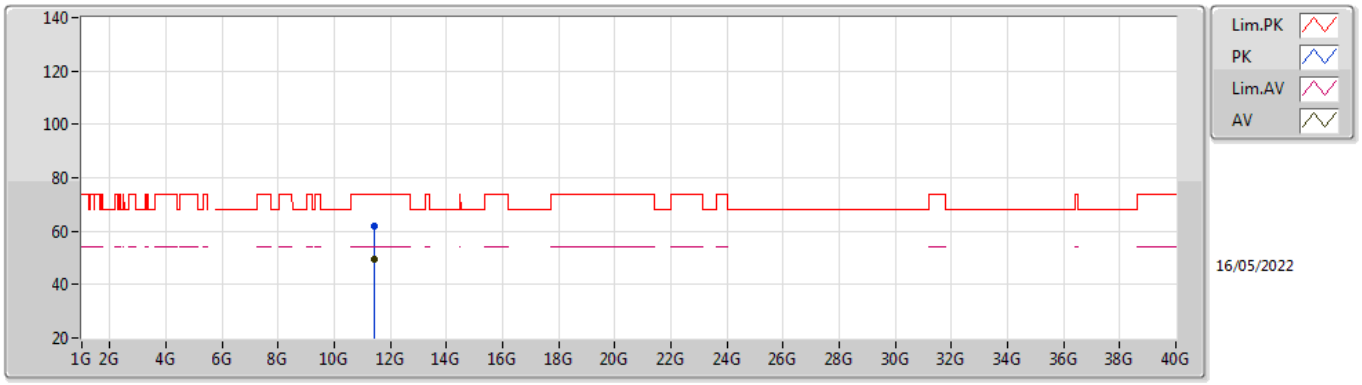


EUT X_1TX
Setting 17.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4135G	62.08	74.00	-11.92	48.04	3	Vertical	212	1.91	-	38.83	10.71	35.50
AV	11.4144G	49.41	54.00	-4.59	35.37	3	Vertical	212	1.91	-	38.83	10.71	35.50

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

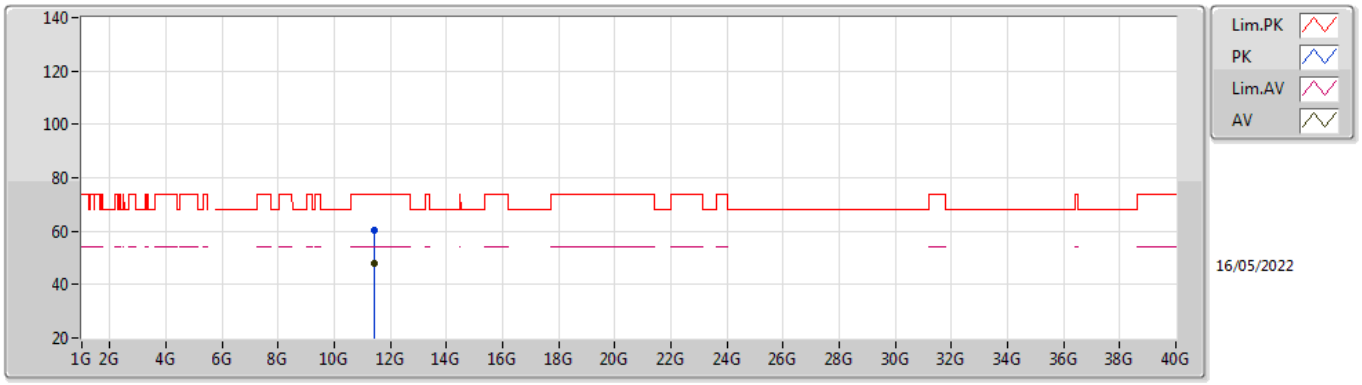


EUT X_1TX
Setting 17.75
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4135G	60.48	74.00	-13.52	46.44	3	Horizontal	81	1.51	-	38.83	10.71	35.50
AV	11.4141G	47.86	54.00	-6.14	33.82	3	Horizontal	81	1.51	-	38.83	10.71	35.50

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

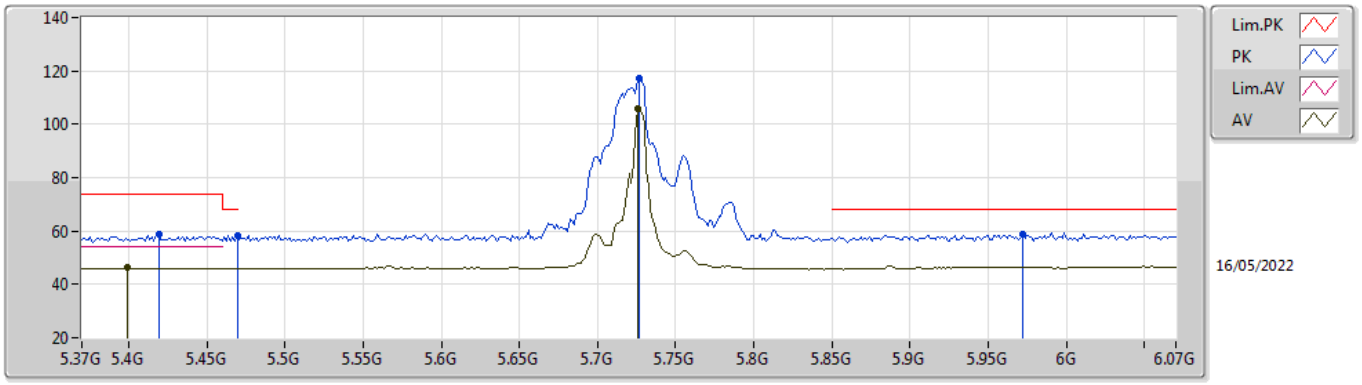


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.419G	58.86	74.00	-15.14	52.43	3	Vertical	321	1.99	-	34.56	7.22	35.35
AV	5.3994G	46.13	54.00	-7.87	39.68	3	Vertical	321	1.99	-	34.60	7.20	35.35
PK	5.4694G	58.29	68.20	-9.91	51.83	3	Vertical	321	1.99	-	34.54	7.27	35.35
PK	5.727G	117.39	Inf	-Inf	111.20	3	Vertical	321	1.99	-	34.25	7.40	35.46
AV	5.7256G	105.61	Inf	-Inf	99.42	3	Vertical	321	1.99	-	34.25	7.40	35.46
PK	5.972G	58.58	68.20	-9.62	51.80	3	Vertical	321	1.99	-	34.80	7.57	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

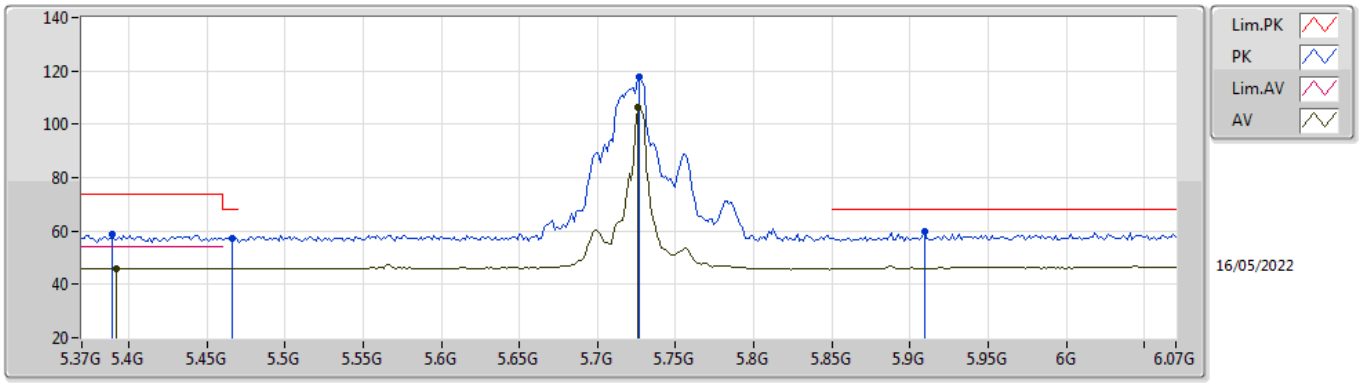


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3896G	58.77	74.00	-15.23	52.34	3	Horizontal	2	2.02	-	34.58	7.20	35.35
AV	5.3924G	46.05	54.00	-7.95	39.62	3	Horizontal	2	2.02	-	34.58	7.20	35.35
PK	5.4666G	57.41	68.20	-10.79	50.96	3	Horizontal	2	2.02	-	34.53	7.27	35.35
PK	5.727G	117.95	Inf	-Inf	111.76	3	Horizontal	2	2.02	-	34.25	7.40	35.46
AV	5.7256G	106.23	Inf	-Inf	100.04	3	Horizontal	2	2.02	-	34.25	7.40	35.46
PK	5.909G	59.71	68.20	-8.49	53.11	3	Horizontal	2	2.02	-	34.64	7.51	35.55

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

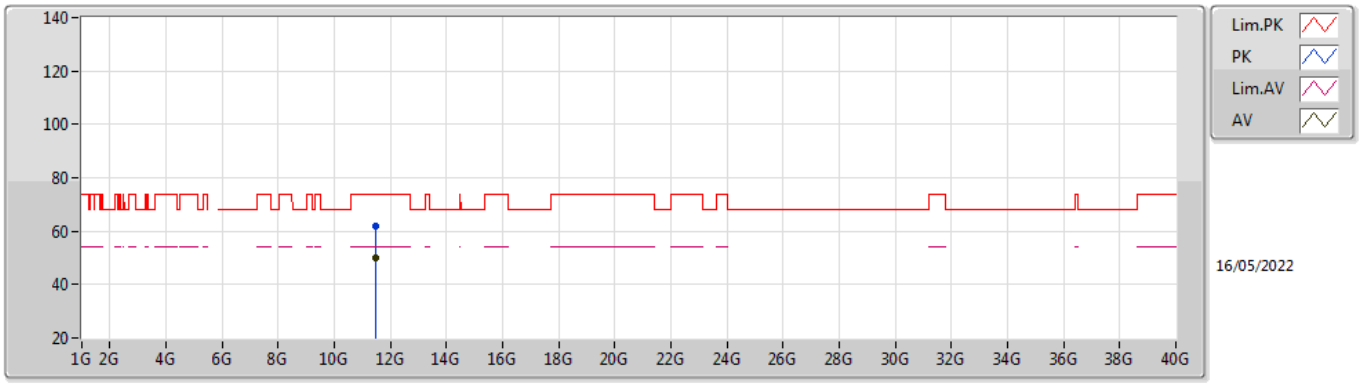


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4538G	61.99	74.00	-12.01	47.91	3	Vertical	158	2.80	-	38.91	10.72	35.55
AV	11.4541G	49.99	54.00	-4.01	35.91	3	Vertical	158	2.80	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

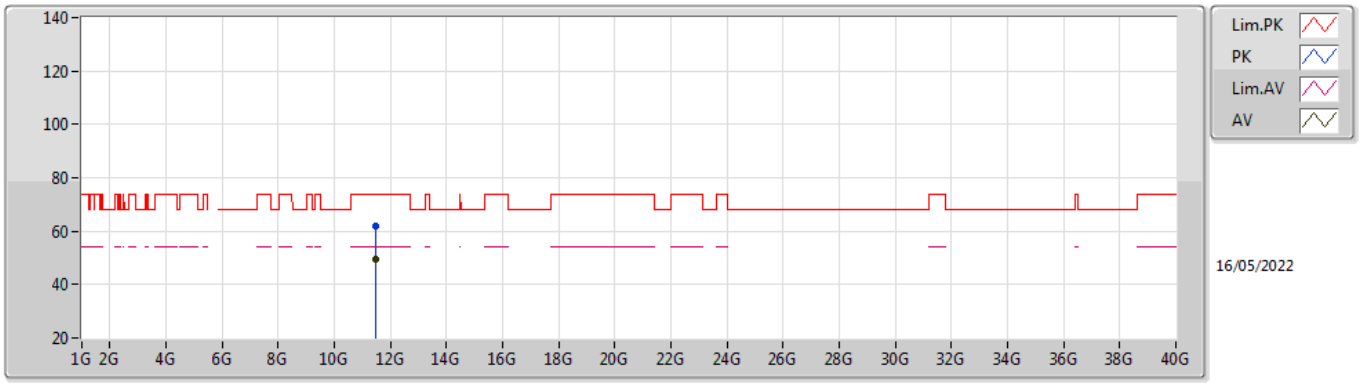


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4538G	62.12	74.00	-11.88	48.04	3	Horizontal	129	2.10	-	38.91	10.72	35.55
AV	11.4541G	49.69	54.00	-4.31	35.61	3	Horizontal	129	2.10	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

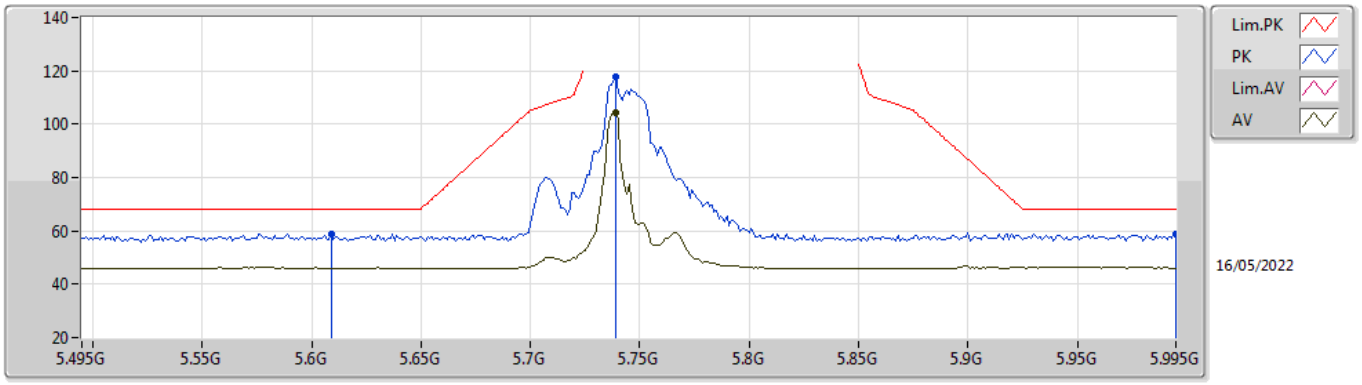


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.609G	58.98	68.20	-9.22	52.40	3	Vertical	270	2.01	-	34.58	7.40	35.40
PK	5.739G	117.82	Inf	-Inf	111.67	3	Vertical	270	2.01	-	34.22	7.40	35.47
AV	5.739G	104.51	Inf	-Inf	98.36	3	Vertical	270	2.01	-	34.22	7.40	35.47
PK	5.995G	58.76	68.20	-9.44	51.97	3	Vertical	270	2.01	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

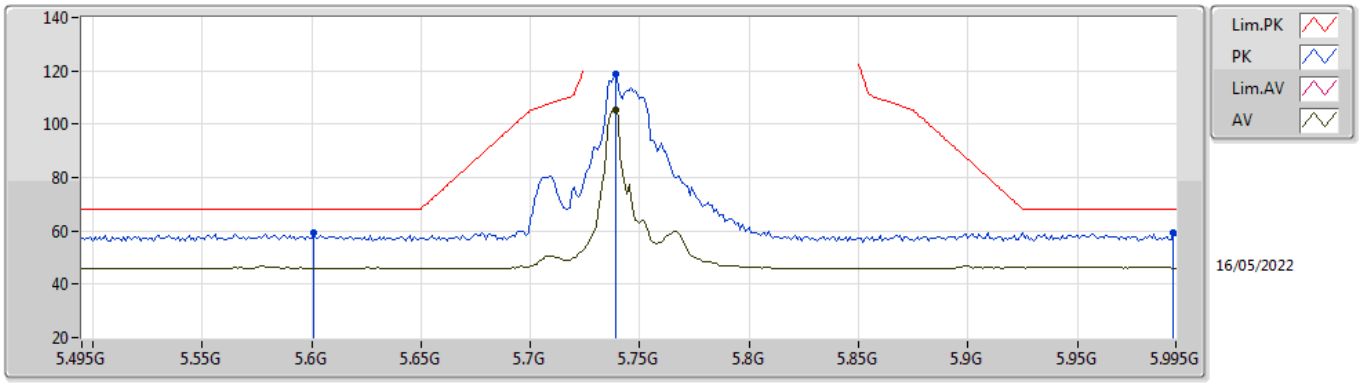


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.601G	59.47	68.20	-8.73	52.87	3	Horizontal	4	2.03	-	34.60	7.40	35.40
PK	5.739G	118.80	Inf	-Inf	112.65	3	Horizontal	4	2.03	-	34.22	7.40	35.47
AV	5.739G	105.50	Inf	-Inf	99.35	3	Horizontal	4	2.03	-	34.22	7.40	35.47
PK	5.994G	59.43	68.20	-8.77	52.64	3	Horizontal	4	2.03	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

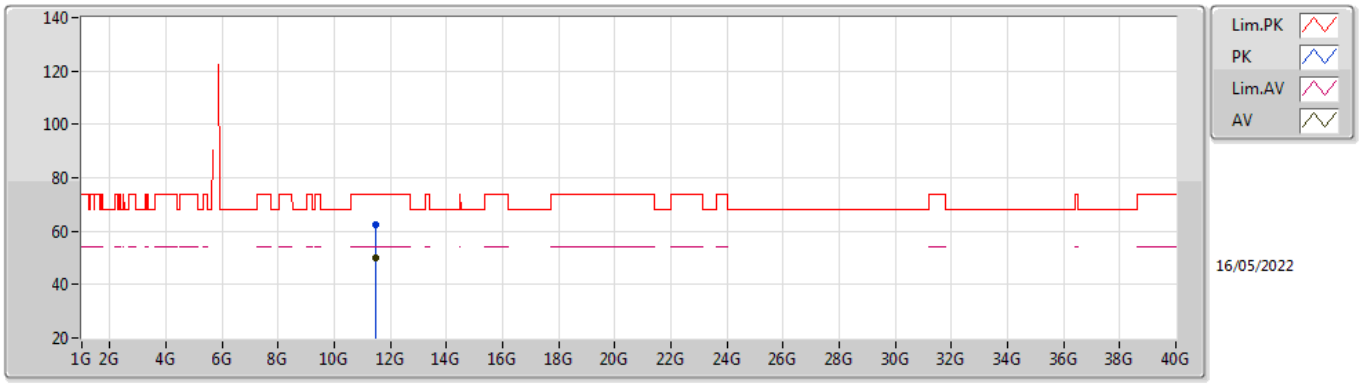


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4756G	62.57	74.00	-11.43	48.47	3	Vertical	157	2.79	-	38.95	10.72	35.57
AV	11.4762G	50.13	54.00	-3.87	36.03	3	Vertical	157	2.79	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

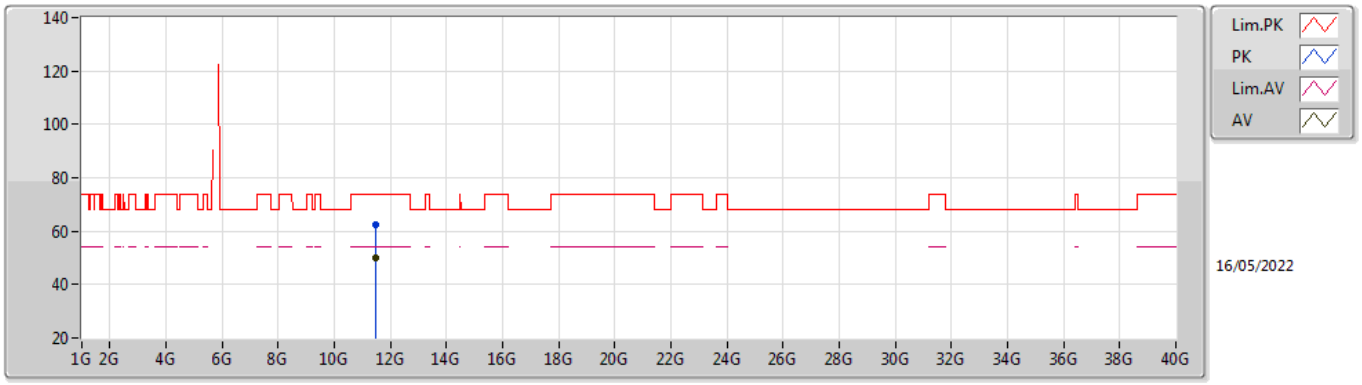


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4762G	62.52	74.00	-11.48	48.42	3	Horizontal	129	2.09	-	38.95	10.72	35.57
AV	11.4762G	50.22	54.00	-3.78	36.12	3	Horizontal	129	2.09	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

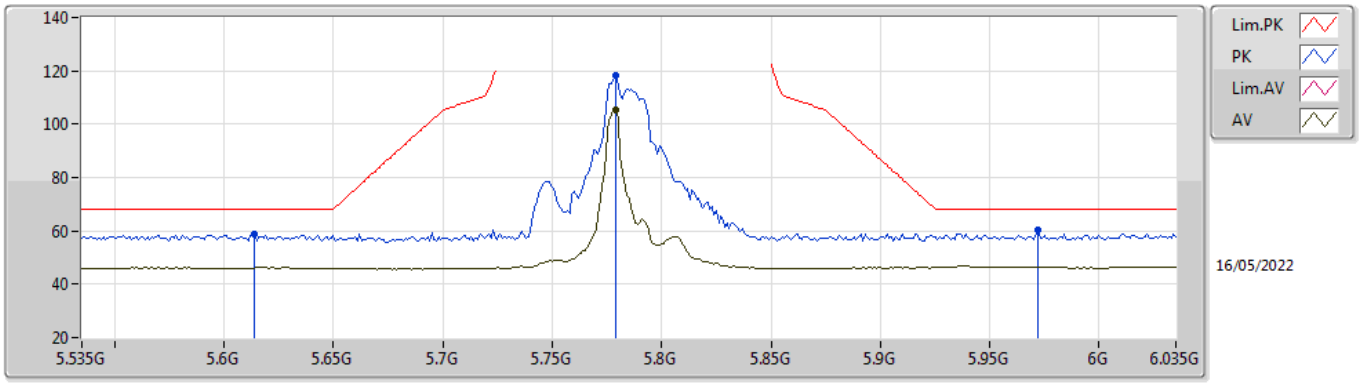


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.614G	58.70	68.20	-9.50	52.14	3	Vertical	322	2.05	-	34.57	7.40	35.41
PK	5.779G	118.39	Inf	-Inf	112.28	3	Vertical	322	2.05	-	34.20	7.40	35.49
AV	5.779G	105.21	Inf	-Inf	99.10	3	Vertical	322	2.05	-	34.20	7.40	35.49
PK	5.972G	60.33	68.20	-7.87	53.55	3	Vertical	322	2.05	-	34.80	7.57	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

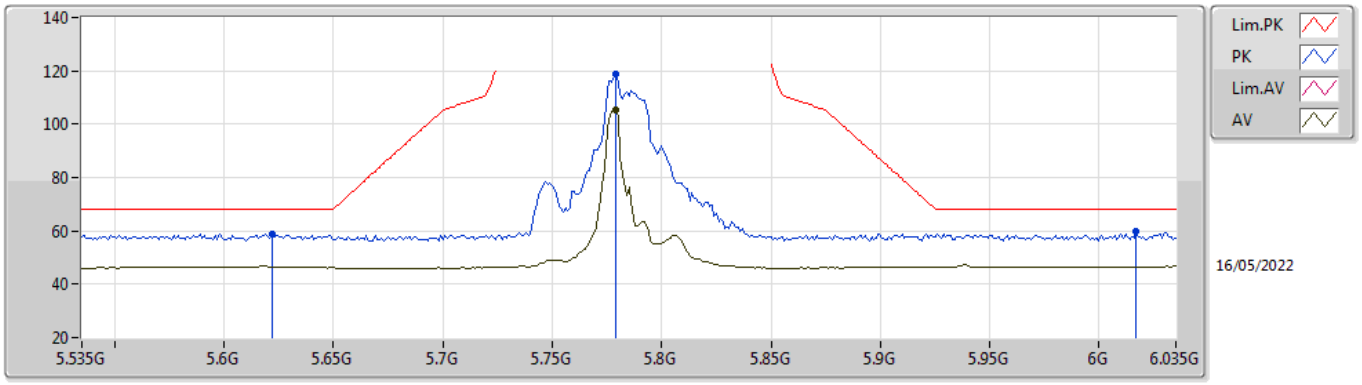


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.622G	59.02	68.20	-9.18	52.47	3	Horizontal	3	2.00	-	34.56	7.40	35.41
PK	5.779G	118.80	Inf	-Inf	112.69	3	Horizontal	3	2.00	-	34.20	7.40	35.49
AV	5.779G	105.59	Inf	-Inf	99.48	3	Horizontal	3	2.00	-	34.20	7.40	35.49
PK	6.017G	59.58	68.20	-8.62	52.73	3	Horizontal	3	2.00	-	34.83	7.61	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

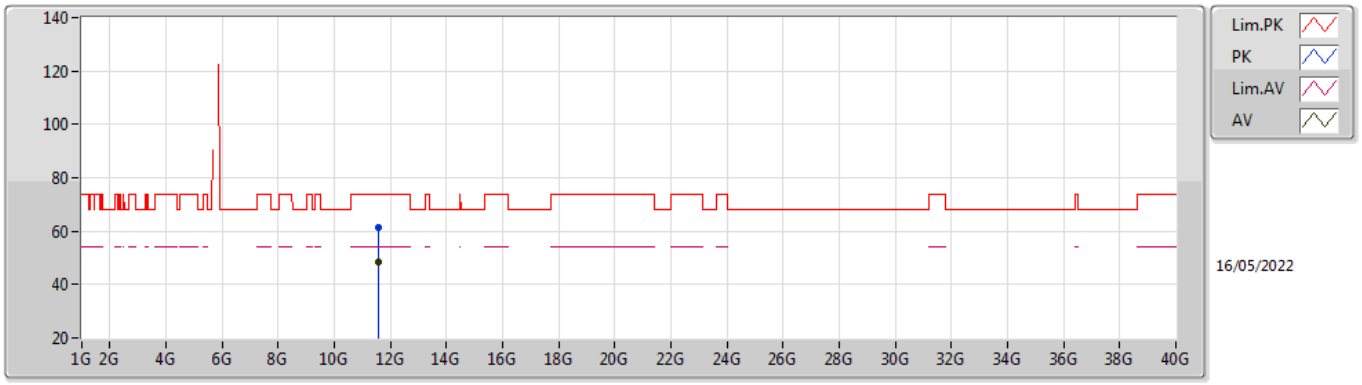


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5562G	61.60	74.00	-12.40	47.24	3	Vertical	154	1.80	-	39.22	10.73	35.59
AV	11.5562G	48.47	54.00	-5.53	34.11	3	Vertical	154	1.80	-	39.22	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

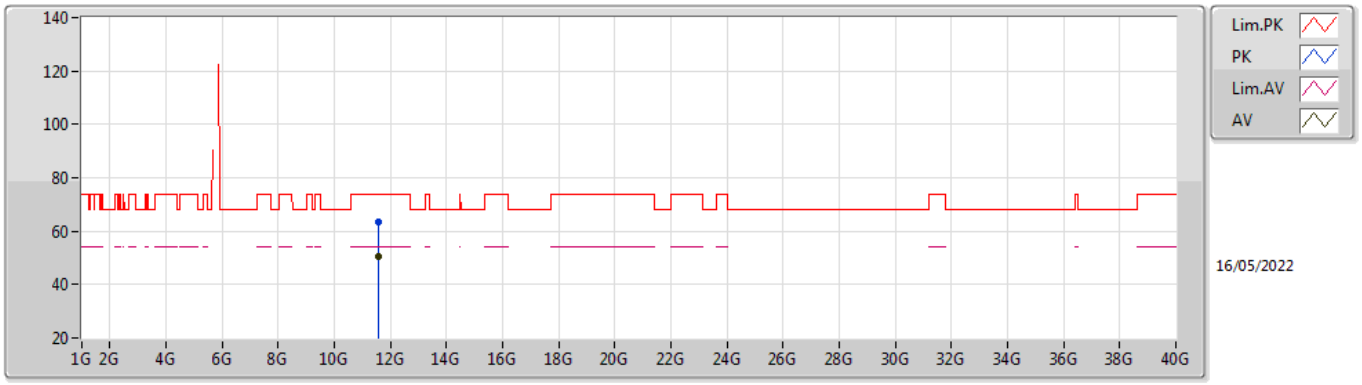


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5562G	63.27	74.00	-10.73	48.91	3	Horizontal	184	2.02	-	39.22	10.73	35.59
AV	11.5562G	50.28	54.00	-3.72	35.92	3	Horizontal	184	2.02	-	39.22	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

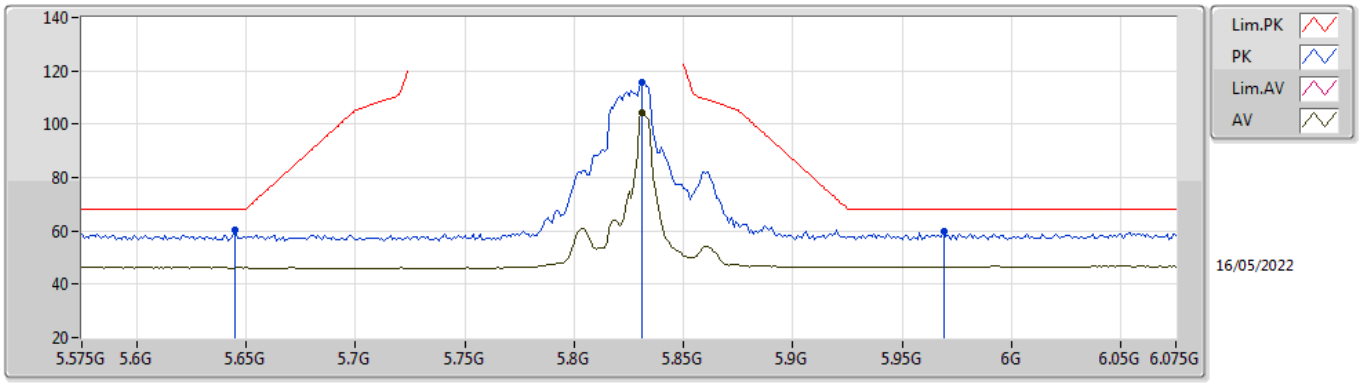


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.645G	60.11	68.20	-8.09	53.62	3	Vertical	261	1.91	-	34.51	7.40	35.42
PK	5.831G	115.81	Inf	-Inf	109.64	3	Vertical	261	1.91	-	34.26	7.43	35.52
AV	5.831G	104.13	Inf	-Inf	97.96	3	Vertical	261	1.91	-	34.26	7.43	35.52
PK	5.969G	60.04	68.20	-8.16	53.25	3	Vertical	261	1.91	-	34.80	7.57	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

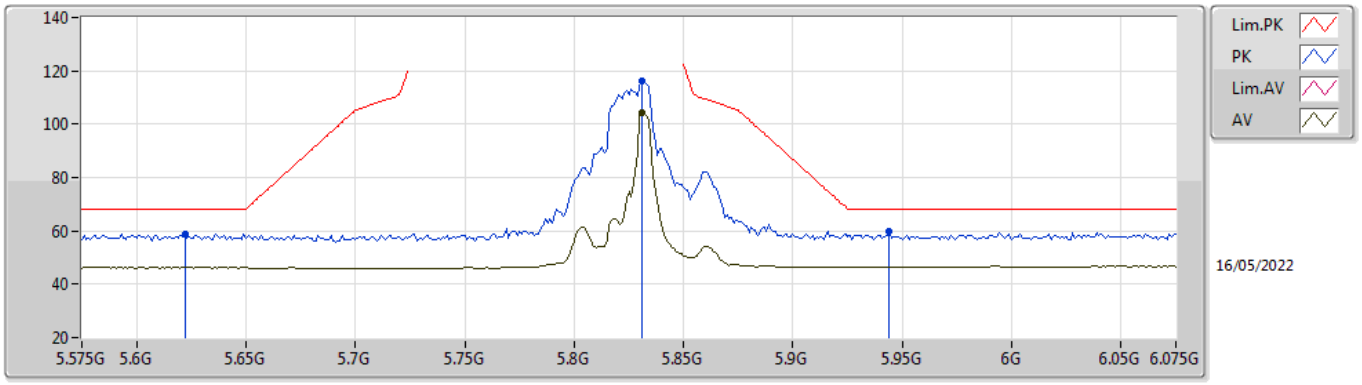


EUT X_1TX
Setting 21.5
03-D-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.622G	58.95	68.20	-9.25	52.40	3	Horizontal	8	1.99	-	34.56	7.40	35.41
PK	5.831G	116.41	Inf	-Inf	110.24	3	Horizontal	8	1.99	-	34.26	7.43	35.52
AV	5.831G	104.54	Inf	-Inf	98.37	3	Horizontal	8	1.99	-	34.26	7.43	35.52
PK	5.944G	59.78	68.20	-8.42	53.03	3	Horizontal	8	1.99	-	34.78	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

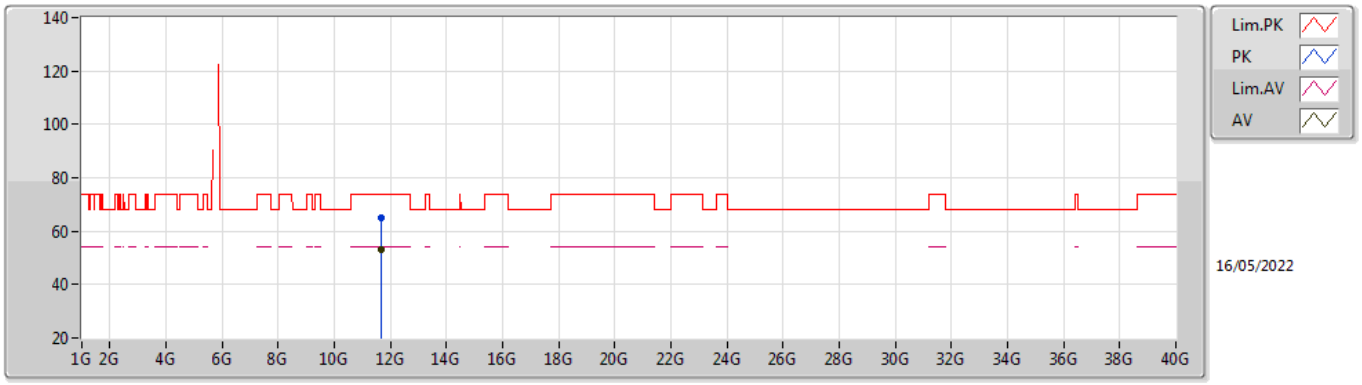


EUT X_1TX
Setting 21.5
03-D-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6653G	65.12	74.00	-8.88	50.53	3	Vertical	168	3.00	-	39.40	10.75	35.56
AV	11.6641G	52.88	54.00	-1.12	38.29	3	Vertical	168	3.00	-	39.40	10.75	35.56

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

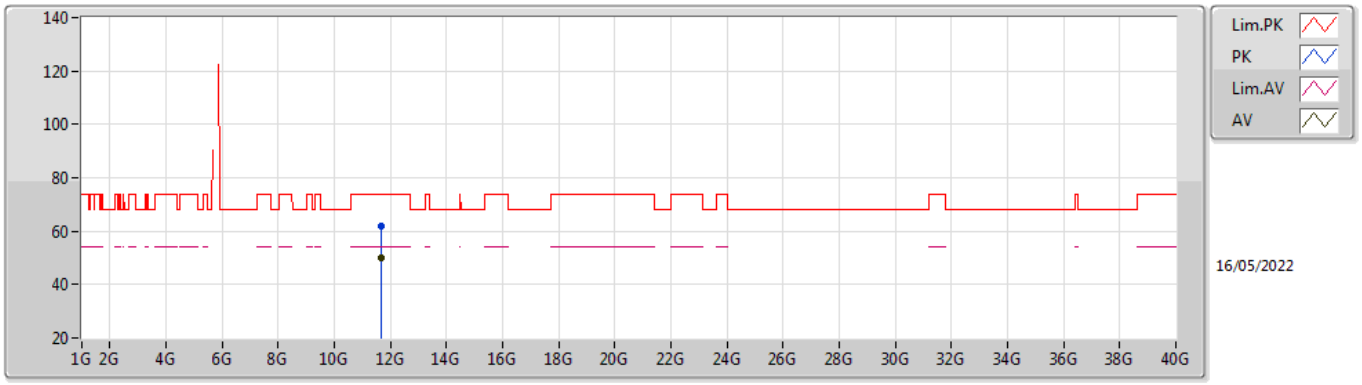

EUT X_1TX
Setting 21.5
03-D-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6653G	62.06	74.00	-11.94	47.47	3	Horizontal	192	1.98	-	39.40	10.75	35.56
AV	11.6641G	50.09	54.00	-3.91	35.50	3	Horizontal	192	1.98	-	39.40	10.75	35.56

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	PK	5.725G	67.77	68.20	-0.43	3	Vertical	214	1.80	-

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

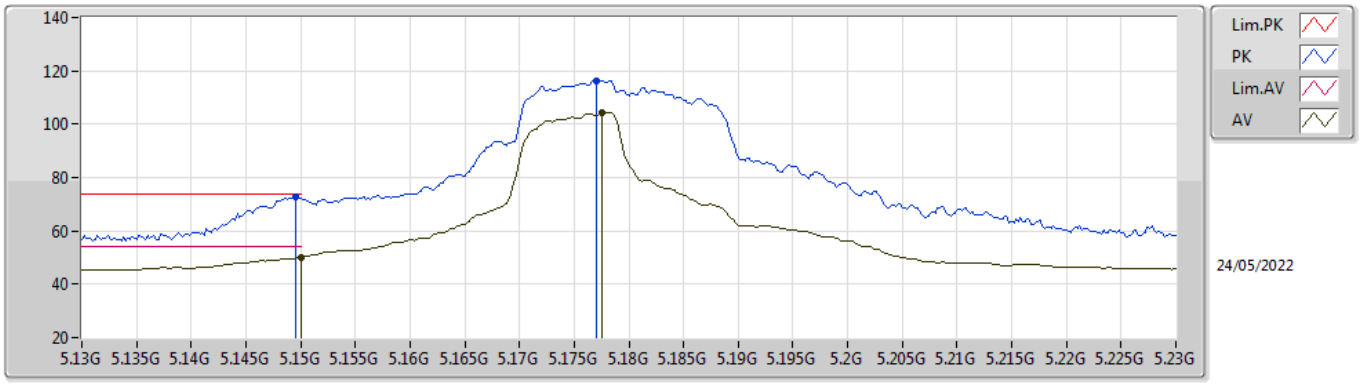


EUT X_1TX
Setting 19.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1496G	72.62	74.00	-1.38	66.79	3	Vertical	215	1.80	-	34.00	7.17	35.34
AV	5.15G	50.23	54.00	-3.77	44.40	3	Vertical	215	1.80	-	34.00	7.17	35.34
PK	5.177G	116.44	Inf	-Inf	110.48	3	Vertical	215	1.80	-	34.11	7.19	35.34
AV	5.1776G	104.44	Inf	-Inf	98.48	3	Vertical	215	1.80	-	34.11	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

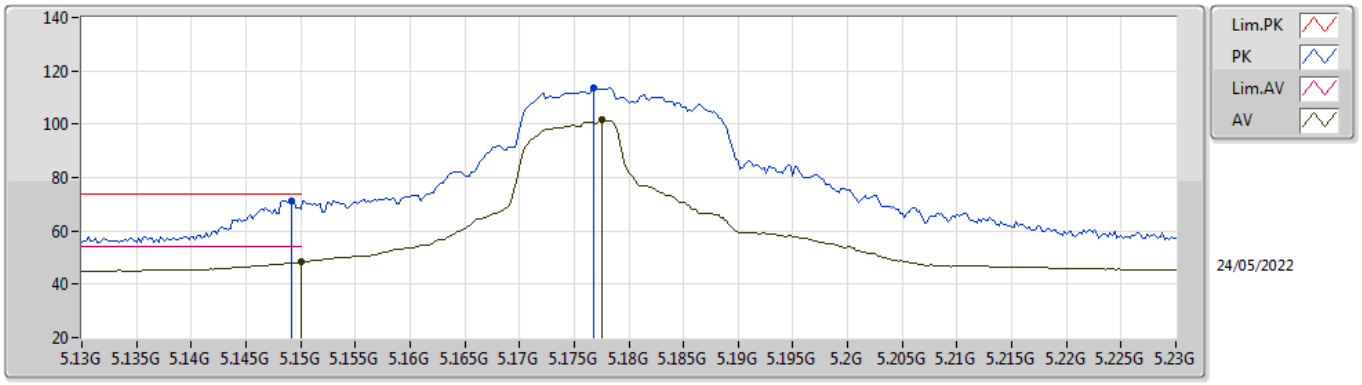


EUT X_1TX
Setting 19.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1492G	71.12	74.00	-2.88	65.29	3	Horizontal	221	2.78	-	34.00	7.17	35.34
AV	5.15G	48.40	54.00	-5.60	42.57	3	Horizontal	221	2.78	-	34.00	7.17	35.34
PK	5.1768G	113.49	Inf	-Inf	107.53	3	Horizontal	221	2.78	-	34.11	7.19	35.34
AV	5.1776G	101.53	Inf	-Inf	95.57	3	Horizontal	221	2.78	-	34.11	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

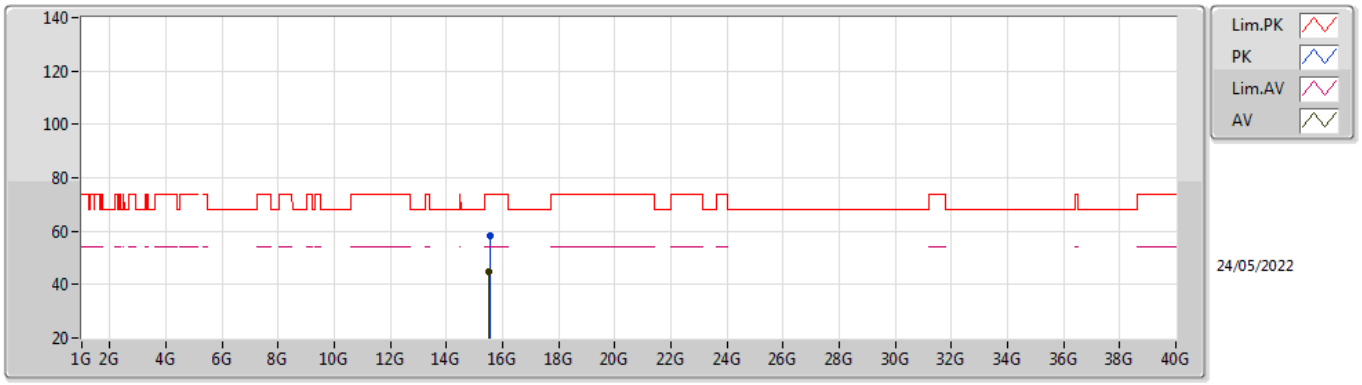


EUT X_1TX
Setting 19.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.53676G	58.22	74.00	-15.78	42.01	3	Vertical	35	1.85	-	38.44	13.17	35.40
AV	15.52704G	44.73	54.00	-9.27	28.45	3	Vertical	35	1.85	-	38.51	13.16	35.39

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

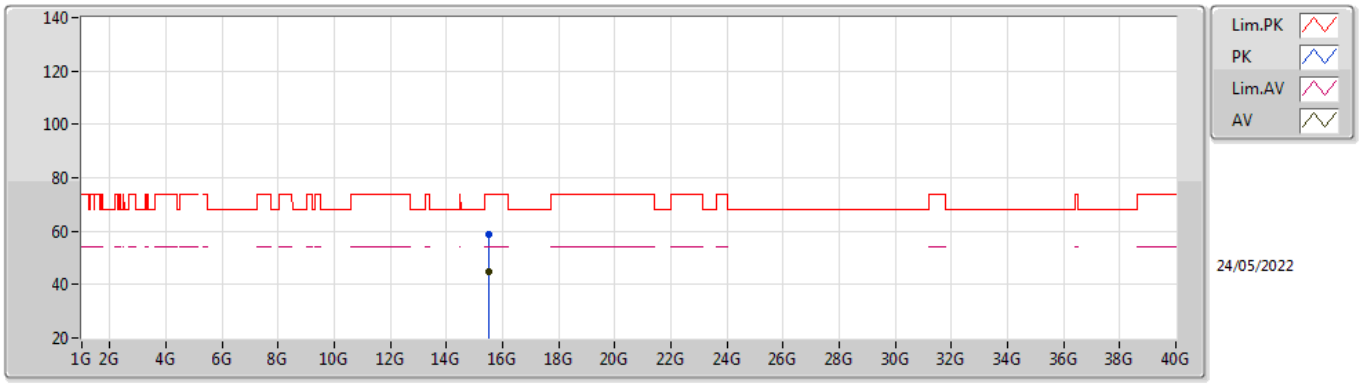


EUT X_1TX
Setting 19.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.52728G	58.61	74.00	-15.39	42.33	3	Horizontal	75	1.17	-	38.51	13.16	35.39
AV	15.525G	44.70	54.00	-9.30	28.40	3	Horizontal	75	1.17	-	38.53	13.16	35.39

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

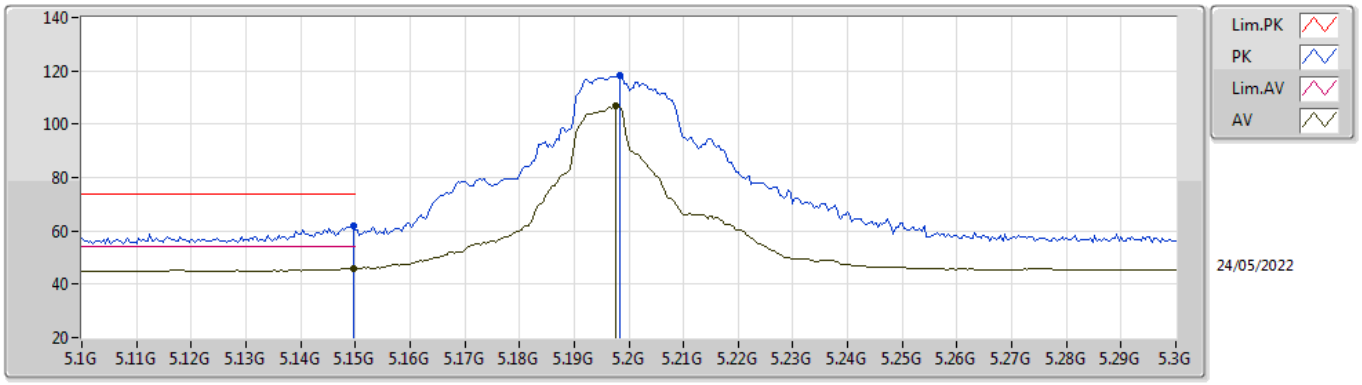


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1496G	61.68	74.00	-12.32	55.85	3	Vertical	217	1.72	-	34.00	7.17	35.34
AV	5.1496G	45.82	54.00	-8.18	39.99	3	Vertical	217	1.72	-	34.00	7.17	35.34
PK	5.1984G	118.38	Inf	-Inf	112.33	3	Vertical	217	1.72	-	34.19	7.20	35.34
AV	5.1976G	106.71	Inf	-Inf	100.66	3	Vertical	217	1.72	-	34.19	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

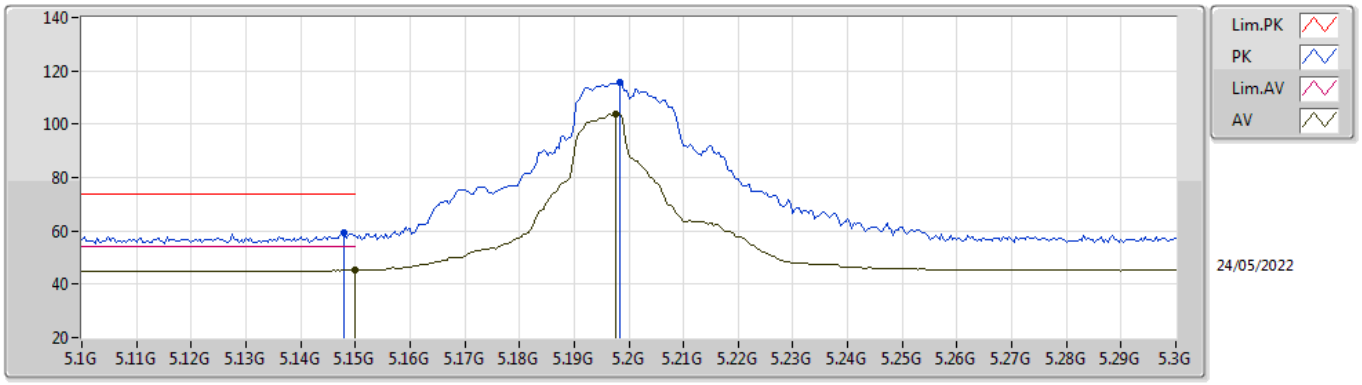


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.148G	59.21	74.00	-14.79	53.38	3	Horizontal	223	2.52	-	34.00	7.17	35.34
AV	5.15G	45.20	54.00	-8.80	39.37	3	Horizontal	223	2.52	-	34.00	7.17	35.34
PK	5.1984G	115.65	Inf	-Inf	109.60	3	Horizontal	223	2.52	-	34.19	7.20	35.34
AV	5.1976G	104.02	Inf	-Inf	97.97	3	Horizontal	223	2.52	-	34.19	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

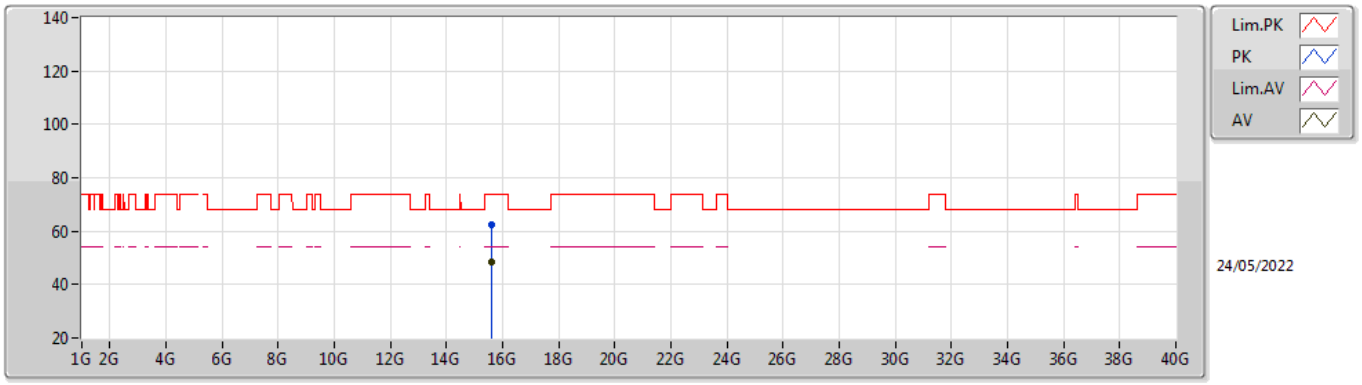


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.58542G	62.20	74.00	-11.80	46.35	3	Vertical	159	2.42	-	38.10	13.19	35.44
AV	15.58752G	48.63	54.00	-5.37	32.79	3	Vertical	159	2.42	-	38.09	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

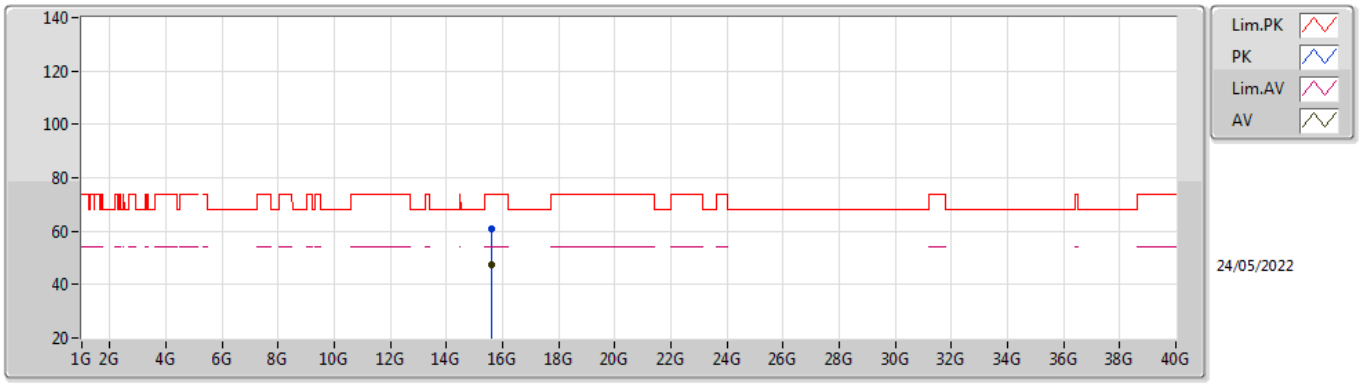


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.59004G	60.96	74.00	-13.04	45.14	3	Horizontal	186	1.86	-	38.07	13.20	35.45
AV	15.58746G	47.17	54.00	-6.83	31.33	3	Horizontal	186	1.86	-	38.09	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

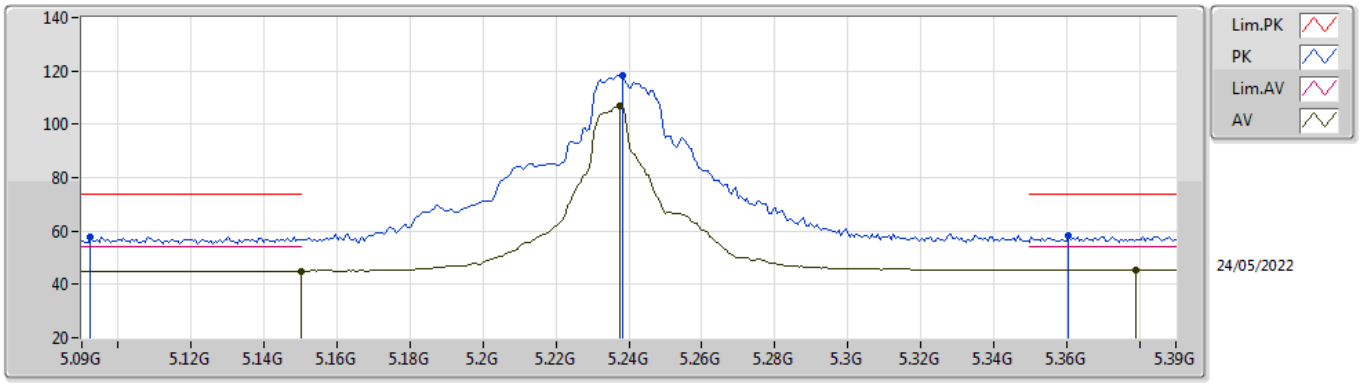


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.0924G	57.91	74.00	-16.09	52.21	3	Vertical	217	1.97	-	33.88	7.15	35.33
AV	5.15G	44.96	54.00	-9.04	39.13	3	Vertical	217	1.97	-	34.00	7.17	35.34
PK	5.2382G	118.28	Inf	-Inf	112.07	3	Vertical	217	1.97	-	34.35	7.20	35.34
AV	5.2376G	106.72	Inf	-Inf	100.51	3	Vertical	217	1.97	-	34.35	7.20	35.34
PK	5.3606G	58.36	74.00	-15.64	51.98	3	Vertical	217	1.97	-	34.52	7.20	35.34
AV	5.3792G	45.41	54.00	-8.59	39.00	3	Vertical	217	1.97	-	34.56	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

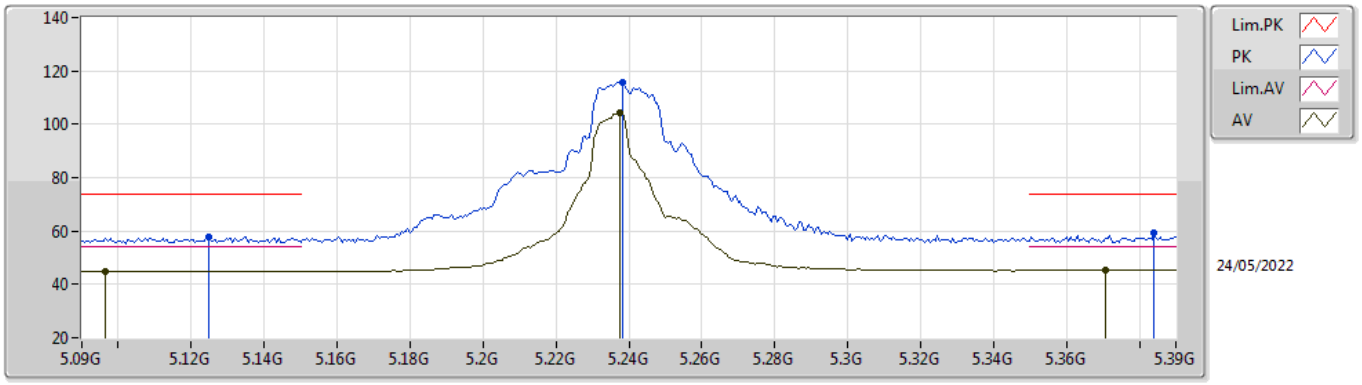


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1248G	57.94	74.00	-16.06	52.16	3	Horizontal	224	2.60	-	33.95	7.16	35.33
AV	5.0966G	44.94	54.00	-9.06	39.23	3	Horizontal	224	2.60	-	33.89	7.15	35.33
PK	5.2382G	115.76	Inf	-Inf	109.55	3	Horizontal	224	2.60	-	34.35	7.20	35.34
AV	5.2376G	104.41	Inf	-Inf	98.20	3	Horizontal	224	2.60	-	34.35	7.20	35.34
PK	5.384G	59.49	74.00	-14.51	53.07	3	Horizontal	224	2.60	-	34.57	7.20	35.35
AV	5.3708G	45.39	54.00	-8.61	38.99	3	Horizontal	224	2.60	-	34.54	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

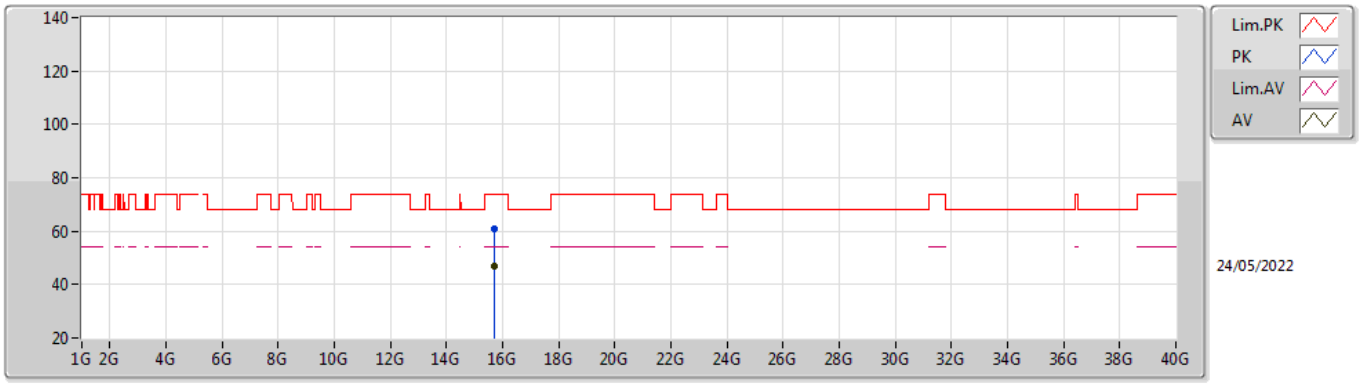


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.72006G	60.69	74.00	-13.31	45.40	3	Vertical	167	2.02	-	37.58	13.26	35.55
AV	15.70764G	47.07	54.00	-6.93	31.83	3	Vertical	167	2.02	-	37.53	13.25	35.54

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

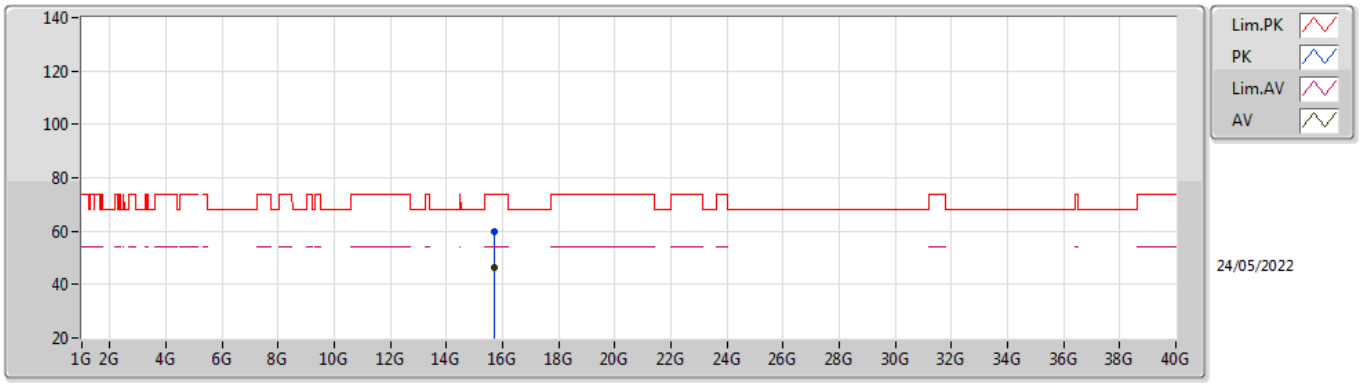


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7086G	59.89	74.00	-14.11	44.66	3	Horizontal	290	1.80	-	37.53	13.25	35.55
AV	15.7074G	46.15	54.00	-7.85	30.91	3	Horizontal	290	1.80	-	37.53	13.25	35.54

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

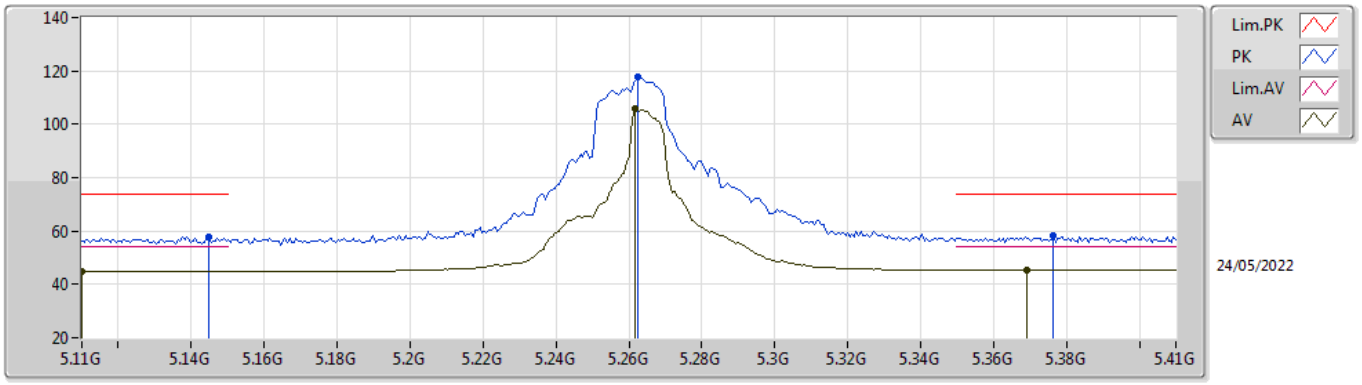


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1448G	57.79	74.00	-16.21	51.97	3	Vertical	215	1.85	-	33.99	7.17	35.34
AV	5.11G	44.89	54.00	-9.11	39.14	3	Vertical	215	1.85	-	33.92	7.16	35.33
PK	5.2624G	117.90	Inf	-Inf	111.62	3	Vertical	215	1.85	-	34.42	7.20	35.34
AV	5.2618G	105.72	Inf	-Inf	99.44	3	Vertical	215	1.85	-	34.42	7.20	35.34
PK	5.3764G	58.04	74.00	-15.96	51.64	3	Vertical	215	1.85	-	34.55	7.20	35.35
AV	5.3692G	45.49	54.00	-8.51	39.09	3	Vertical	215	1.85	-	34.54	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

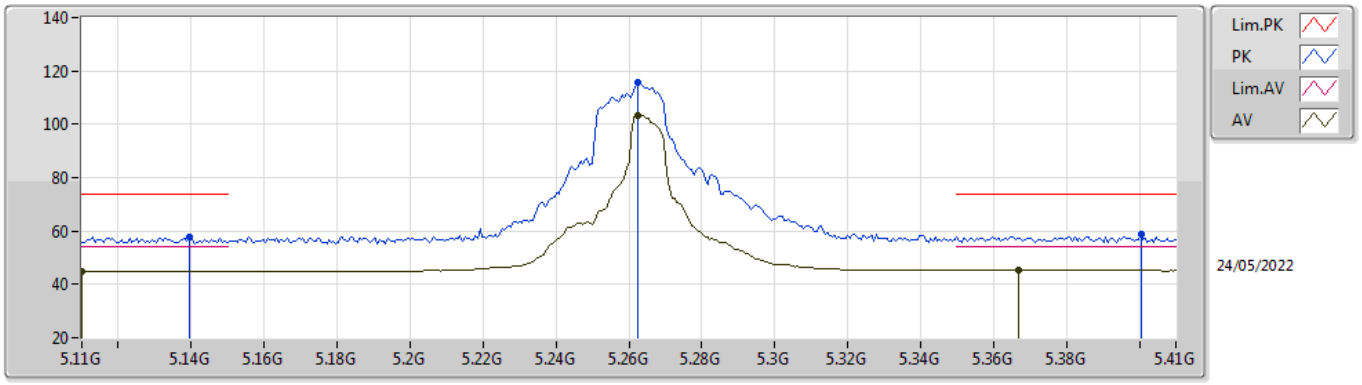


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1394G	57.99	74.00	-16.01	52.18	3	Horizontal	219	2.84	-	33.98	7.17	35.34
AV	5.11G	44.87	54.00	-9.13	39.12	3	Horizontal	219	2.84	-	33.92	7.16	35.33
PK	5.2624G	115.60	Inf	-Inf	109.32	3	Horizontal	219	2.84	-	34.42	7.20	35.34
AV	5.2624G	103.49	Inf	-Inf	97.21	3	Horizontal	219	2.84	-	34.42	7.20	35.34
PK	5.4004G	58.71	74.00	-15.29	52.26	3	Horizontal	219	2.84	-	34.60	7.20	35.35
AV	5.3668G	45.40	54.00	-8.60	39.01	3	Horizontal	219	2.84	-	34.53	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

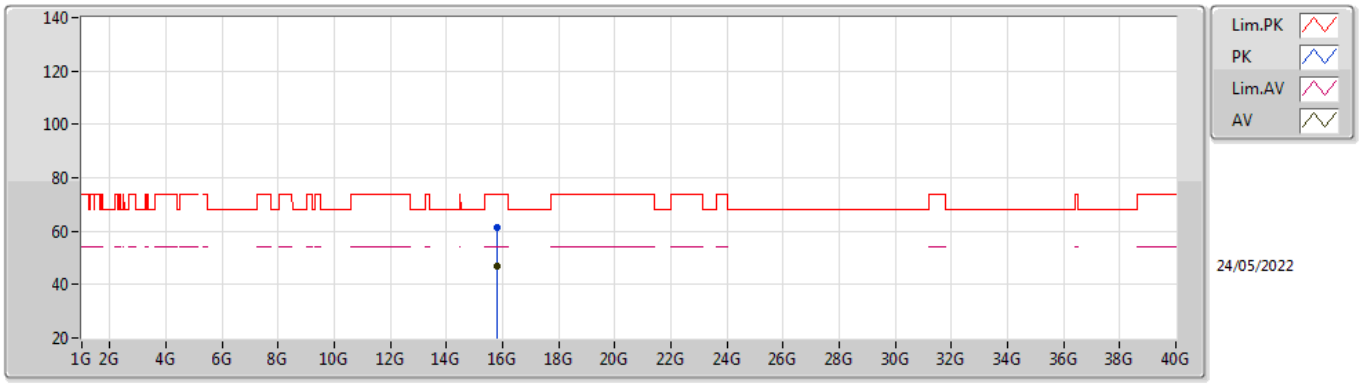


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.79032G	61.15	74.00	-12.85	45.60	3	Vertical	170	2.07	-	37.86	13.30	35.61
AV	15.7935G	47.01	54.00	-6.99	31.46	3	Vertical	170	2.07	-	37.87	13.30	35.62

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

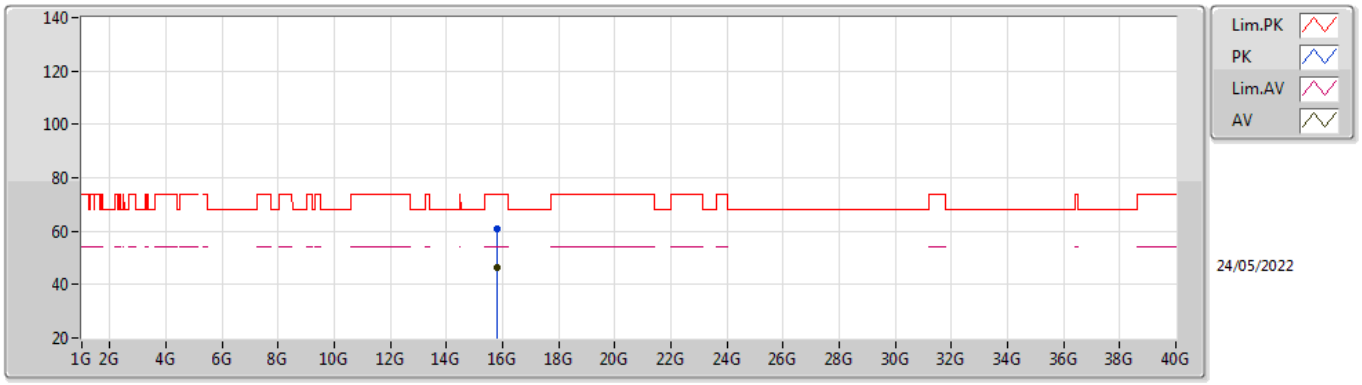


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.79134G	60.85	74.00	-13.15	45.29	3	Horizontal	291	1.79	-	37.87	13.30	35.61
AV	15.7932G	46.17	54.00	-7.83	30.62	3	Horizontal	291	1.79	-	37.87	13.30	35.62

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

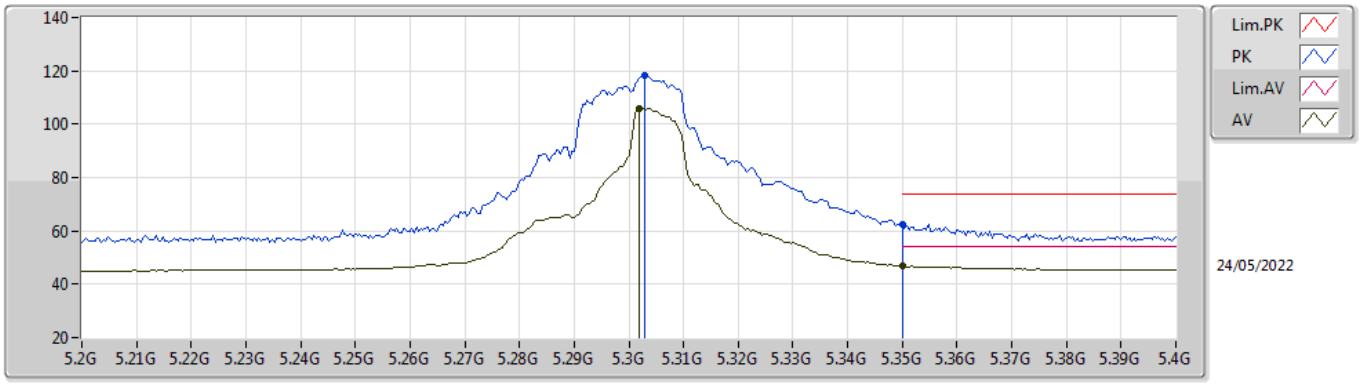


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3028G	118.20	Inf	-Inf	111.84	3	Vertical	214	1.80	-	34.50	7.20	35.34
AV	5.302G	106.07	Inf	-Inf	99.71	3	Vertical	214	1.80	-	34.50	7.20	35.34
PK	5.35G	62.43	74.00	-11.57	56.07	3	Vertical	214	1.80	-	34.50	7.20	35.34
AV	5.35G	46.72	54.00	-7.28	40.36	3	Vertical	214	1.80	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

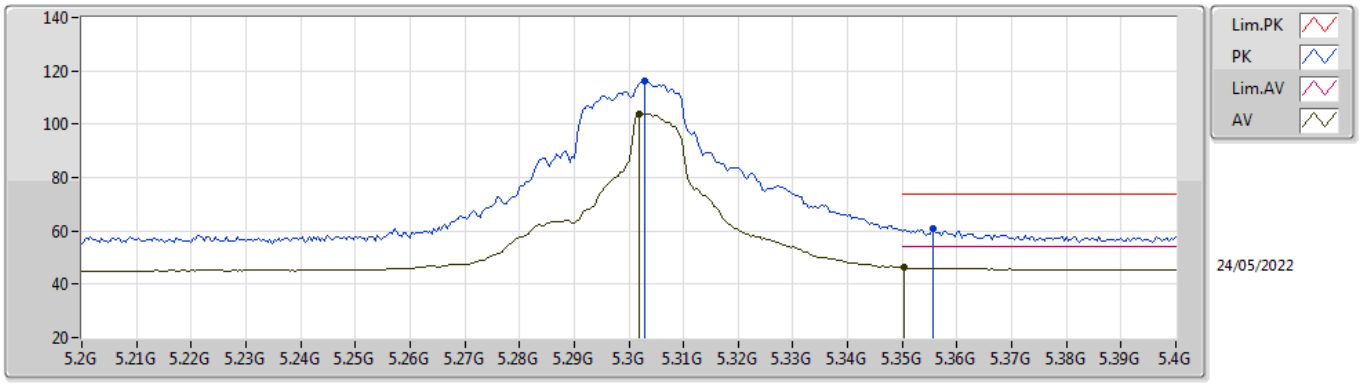


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3028G	116.23	Inf	-Inf	109.87	3	Horizontal	221	2.01	-	34.50	7.20	35.34
AV	5.302G	104.02	Inf	-Inf	97.66	3	Horizontal	221	2.01	-	34.50	7.20	35.34
PK	5.3556G	61.12	74.00	-12.88	54.75	3	Horizontal	221	2.01	-	34.51	7.20	35.34
AV	5.3504G	46.17	54.00	-7.83	39.81	3	Horizontal	221	2.01	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

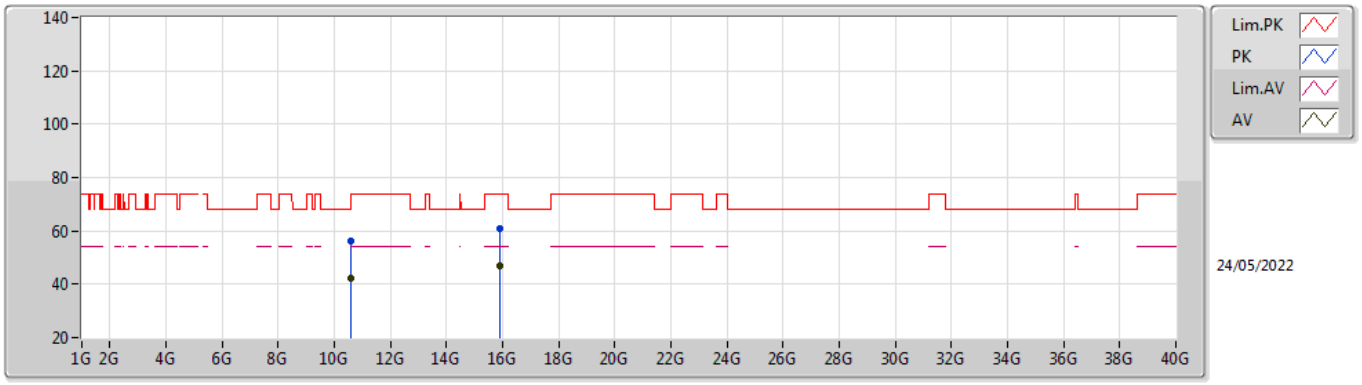


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60654G	56.01	74.00	-17.99	42.59	3	Vertical	60	1.80	-	38.21	10.59	35.38
AV	10.60612G	42.17	54.00	-11.83	28.75	3	Vertical	60	1.80	-	38.21	10.59	35.38
PK	15.90954G	60.67	74.00	-13.33	45.45	3	Vertical	167	2.00	-	37.58	13.35	35.71
AV	15.91338G	46.92	54.00	-7.08	31.71	3	Vertical	167	2.00	-	37.57	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

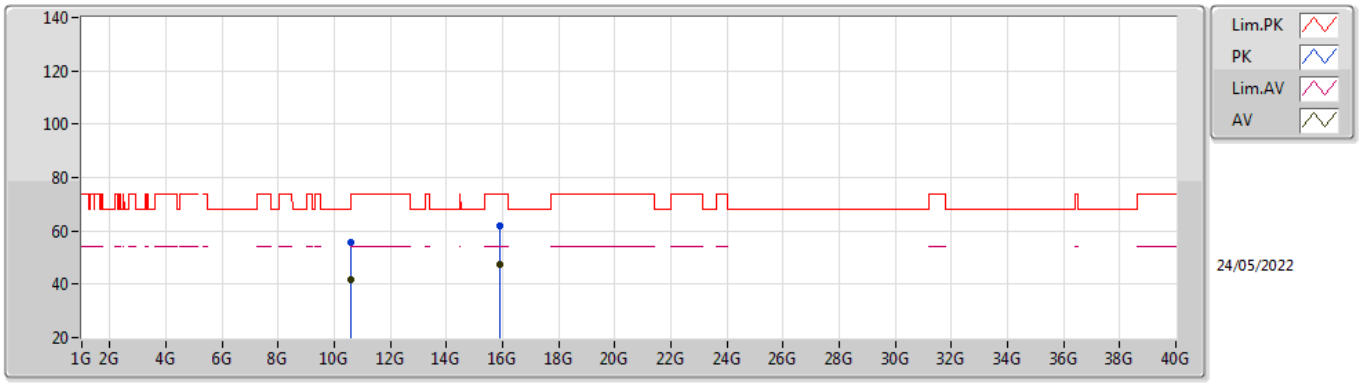


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60864G	55.61	74.00	-18.39	42.18	3	Horizontal	57	2.14	-	38.22	10.59	35.38
AV	10.60858G	41.84	54.00	-12.16	28.41	3	Horizontal	57	2.14	-	38.22	10.59	35.38
PK	15.9105G	62.03	74.00	-11.97	46.80	3	Horizontal	253	1.88	-	37.58	13.36	35.71
AV	15.91338G	47.66	54.00	-6.34	32.45	3	Horizontal	253	1.88	-	37.57	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

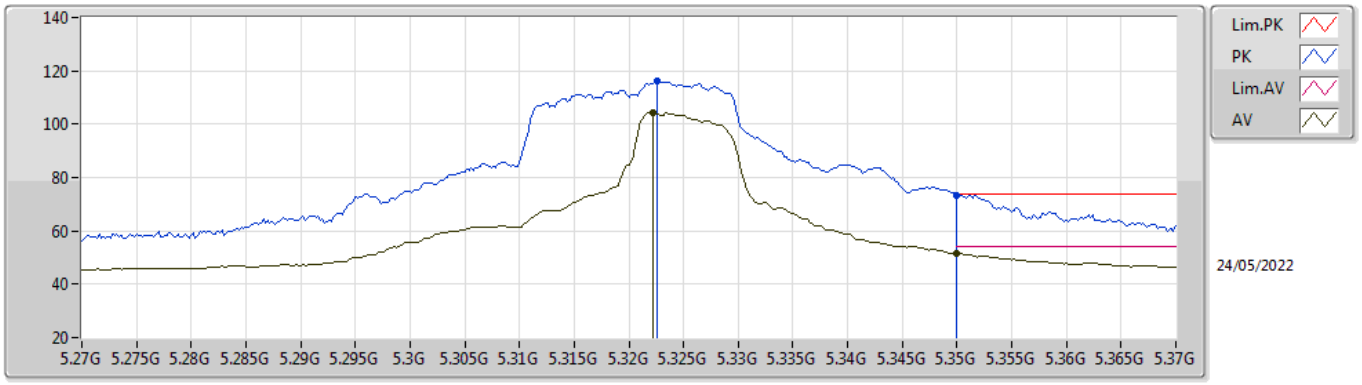


EUT X_1TX
Setting 19.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3226G	116.42	Inf	-Inf	110.06	3	Vertical	218	1.80	-	34.50	7.20	35.34
AV	5.3222G	104.21	Inf	-Inf	97.85	3	Vertical	218	1.80	-	34.50	7.20	35.34
PK	5.35G	73.51	74.00	-0.49	67.15	3	Vertical	218	1.80	-	34.50	7.20	35.34
AV	5.35G	51.72	54.00	-2.28	45.36	3	Vertical	218	1.80	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

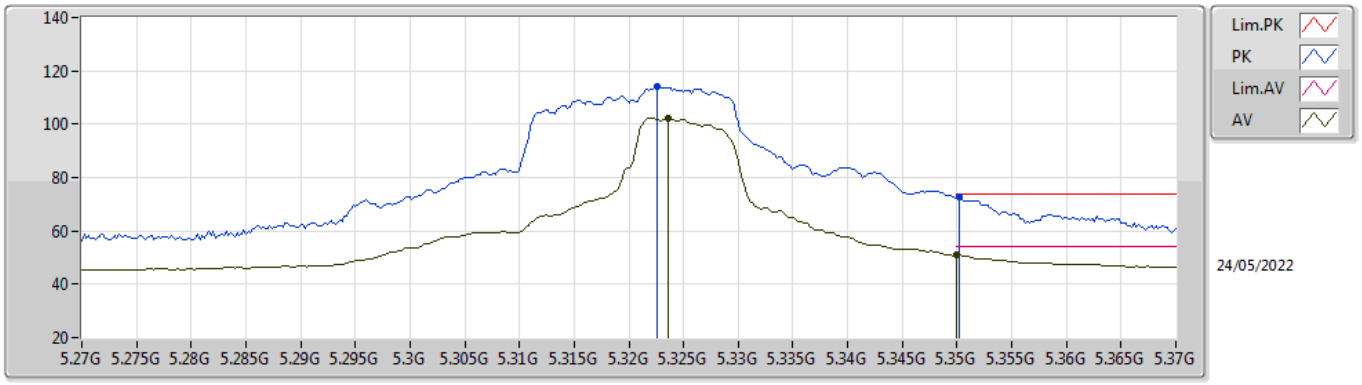


EUT X_1TX
Setting 19.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3226G	114.38	Inf	-Inf	108.02	3	Horizontal	217	2.76	-	34.50	7.20	35.34
AV	5.3236G	102.27	Inf	-Inf	95.91	3	Horizontal	217	2.76	-	34.50	7.20	35.34
PK	5.3502G	72.58	74.00	-1.42	66.22	3	Horizontal	217	2.76	-	34.50	7.20	35.34
AV	5.35G	51.05	54.00	-2.95	44.69	3	Horizontal	217	2.76	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

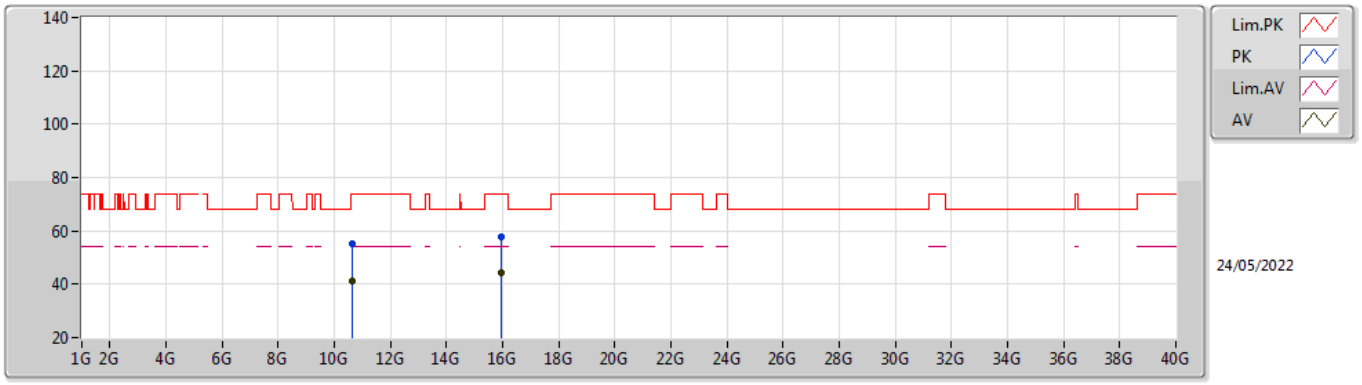


EUT X_1TX
Setting 19.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.64792G	55.08	74.00	-18.92	41.52	3	Vertical	60	1.64	-	38.30	10.60	35.34
AV	10.6463G	41.21	54.00	-12.79	27.66	3	Vertical	60	1.64	-	38.29	10.60	35.34
PK	15.969G	57.74	74.00	-16.26	42.66	3	Vertical	86	2.64	-	37.46	13.38	35.76
AV	15.97278G	44.29	54.00	-9.71	29.22	3	Vertical	86	2.64	-	37.45	13.39	35.77

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

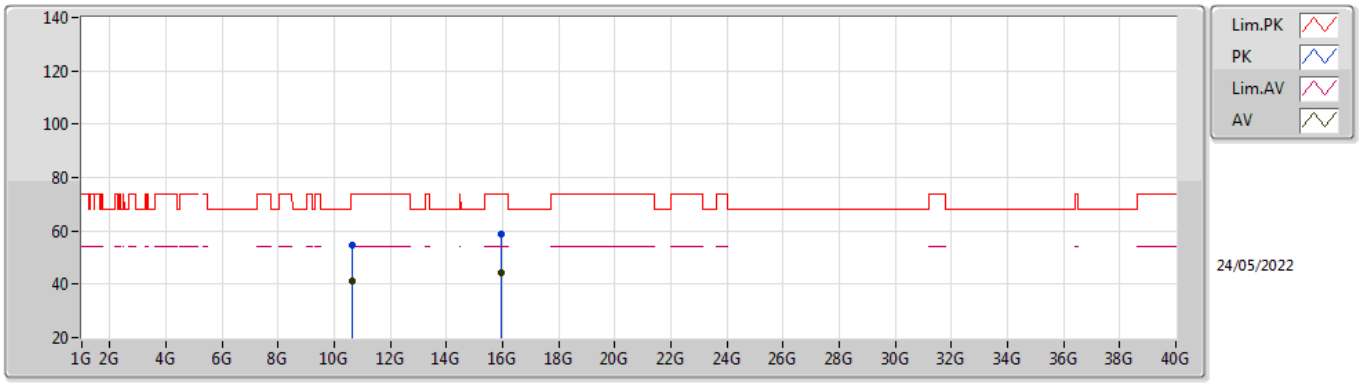


EUT X_1TX
Setting 19.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.64516G	54.74	74.00	-19.26	41.20	3	Horizontal	217	1.76	-	38.29	10.60	35.35
AV	10.6463G	41.07	54.00	-12.93	27.52	3	Horizontal	217	1.76	-	38.29	10.60	35.34
PK	15.97104G	58.70	74.00	-15.30	43.62	3	Horizontal	91	2.73	-	37.46	13.39	35.77
AV	15.96312G	44.30	54.00	-9.70	29.21	3	Horizontal	91	2.73	-	37.47	13.38	35.76

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

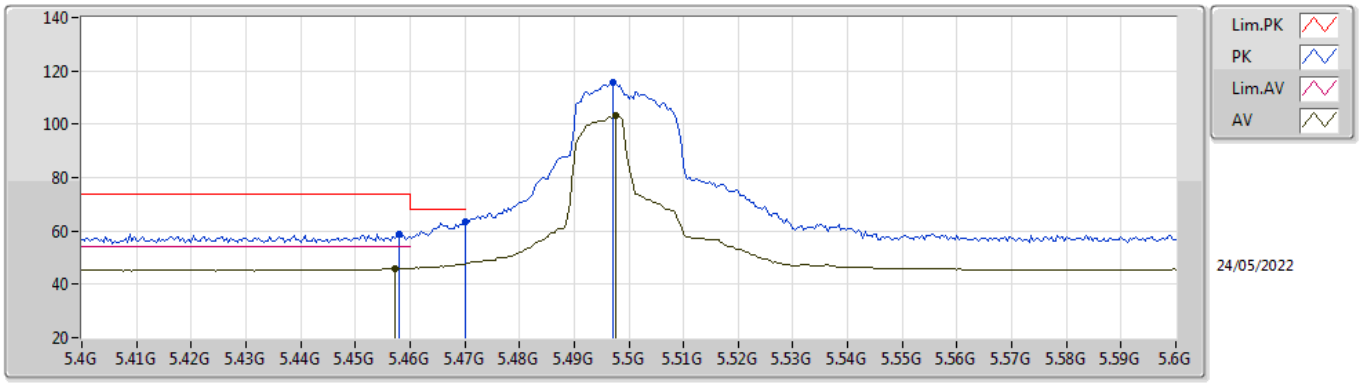


EUT X_1TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.458G	58.94	74.00	-15.06	52.51	3	Vertical	215	1.79	-	34.52	7.26	35.35
AV	5.4572G	46.09	54.00	-7.91	39.67	3	Vertical	215	1.79	-	34.51	7.26	35.35
PK	5.47G	63.46	68.20	-4.74	57.00	3	Vertical	215	1.79	-	34.54	7.27	35.35
PK	5.4972G	115.54	Inf	-Inf	109.00	3	Vertical	215	1.79	-	34.59	7.30	35.35
AV	5.4976G	103.24	Inf	-Inf	96.69	3	Vertical	215	1.79	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

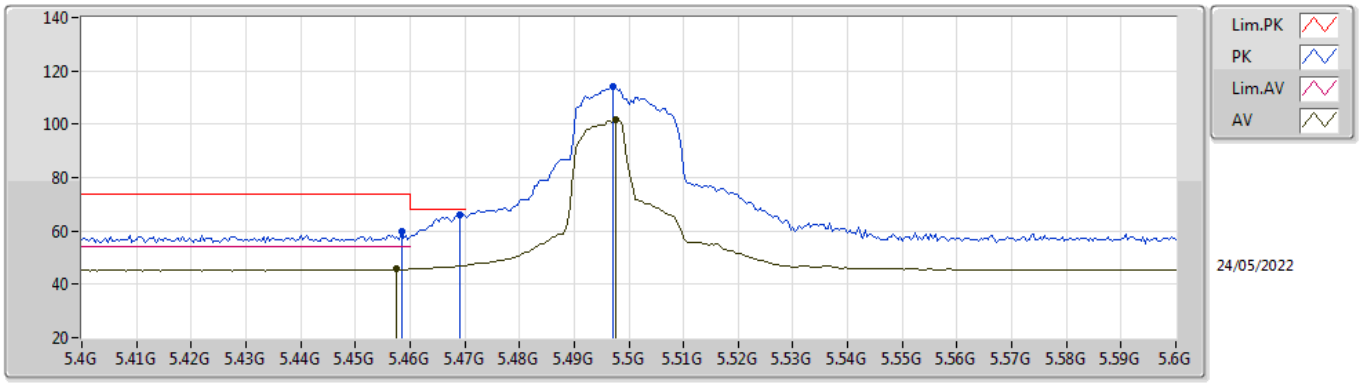


EUT X_1TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4584G	59.82	74.00	-14.18	53.39	3	Horizontal	219	1.94	-	34.52	7.26	35.35
AV	5.4576G	45.70	54.00	-8.30	39.27	3	Horizontal	219	1.94	-	34.52	7.26	35.35
PK	5.4692G	66.16	68.20	-2.04	59.70	3	Horizontal	219	1.94	-	34.54	7.27	35.35
PK	5.4972G	113.99	Inf	-Inf	107.45	3	Horizontal	219	1.94	-	34.59	7.30	35.35
AV	5.4976G	101.53	Inf	-Inf	94.98	3	Horizontal	219	1.94	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

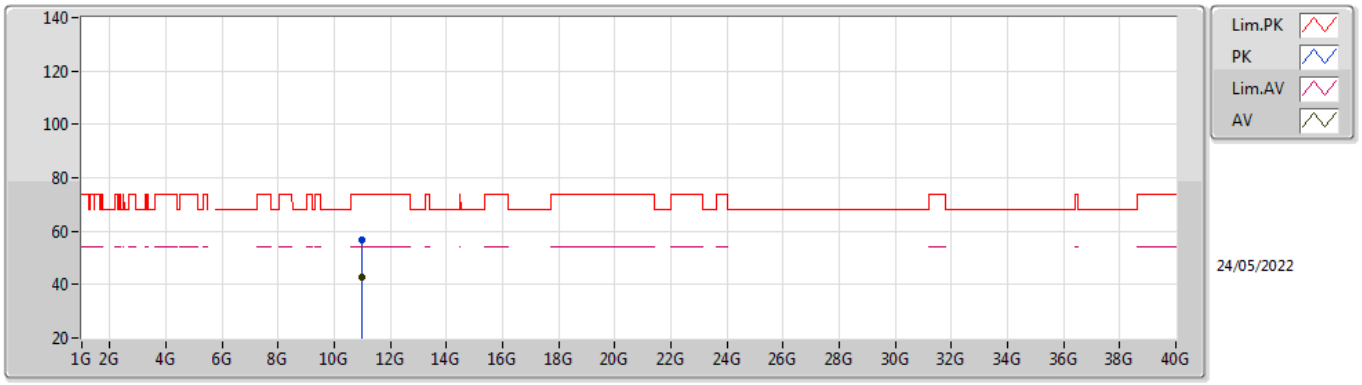


EUT X_1TX
Setting 18
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9904G	56.98	74.00	-17.02	42.99	3	Vertical	234	1.77	-	38.39	10.65	35.05
AV	10.9913G	42.70	54.00	-11.30	28.71	3	Vertical	234	1.77	-	38.39	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

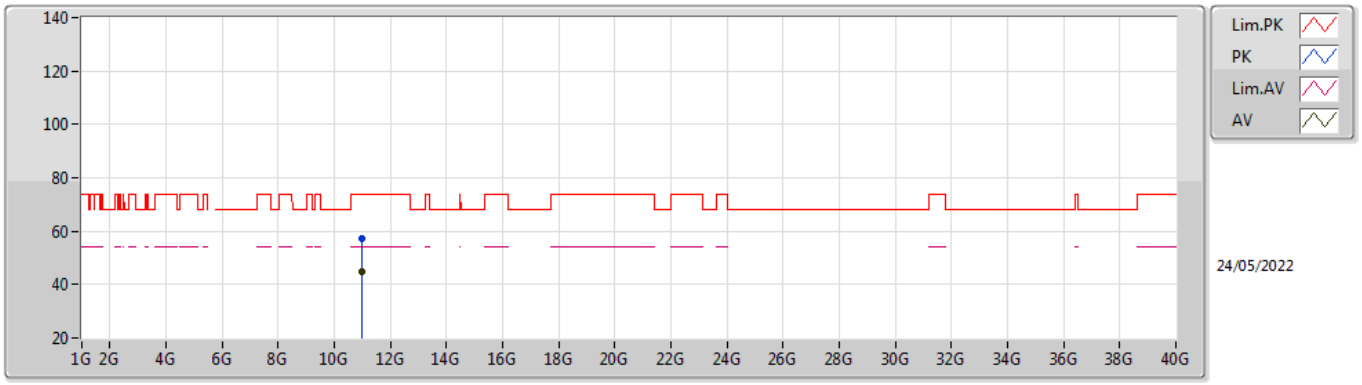


EUT X_1TX
Setting 18
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.991G	57.28	74.00	-16.72	43.29	3	Horizontal	237	2.93	-	38.39	10.65	35.05
AV	10.99136G	44.81	54.00	-9.19	30.82	3	Horizontal	237	2.93	-	38.39	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

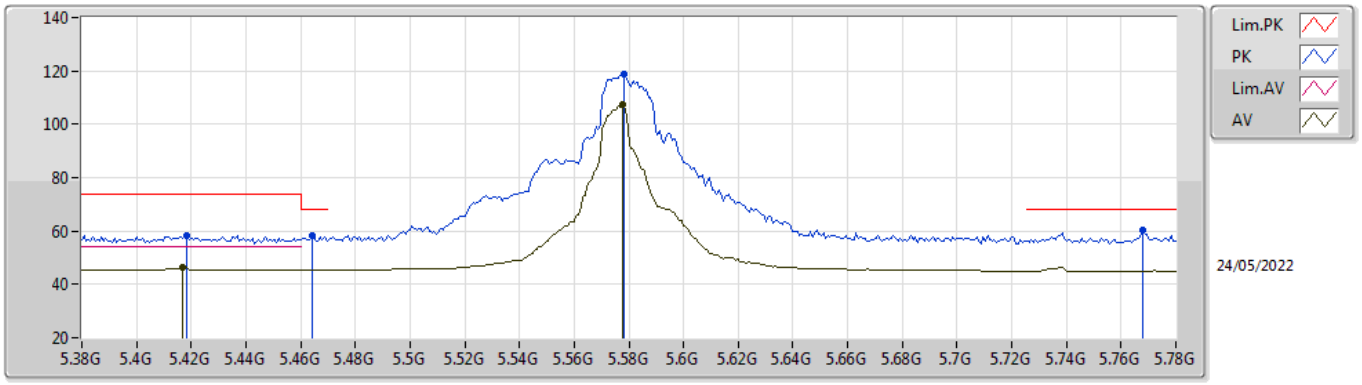


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4184G	58.40	74.00	-15.60	51.97	3	Vertical	217	1.22	-	34.56	7.22	35.35
AV	5.4168G	46.49	54.00	-7.51	40.05	3	Vertical	217	1.22	-	34.57	7.22	35.35
PK	5.464G	58.28	68.20	-9.92	51.84	3	Vertical	217	1.22	-	34.53	7.26	35.35
PK	5.5784G	118.65	Inf	-Inf	112.06	3	Vertical	217	1.22	-	34.60	7.38	35.39
AV	5.5776G	107.23	Inf	-Inf	100.64	3	Vertical	217	1.22	-	34.60	7.38	35.39
PK	5.768G	60.25	68.20	-7.95	54.13	3	Vertical	217	1.22	-	34.20	7.40	35.48

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

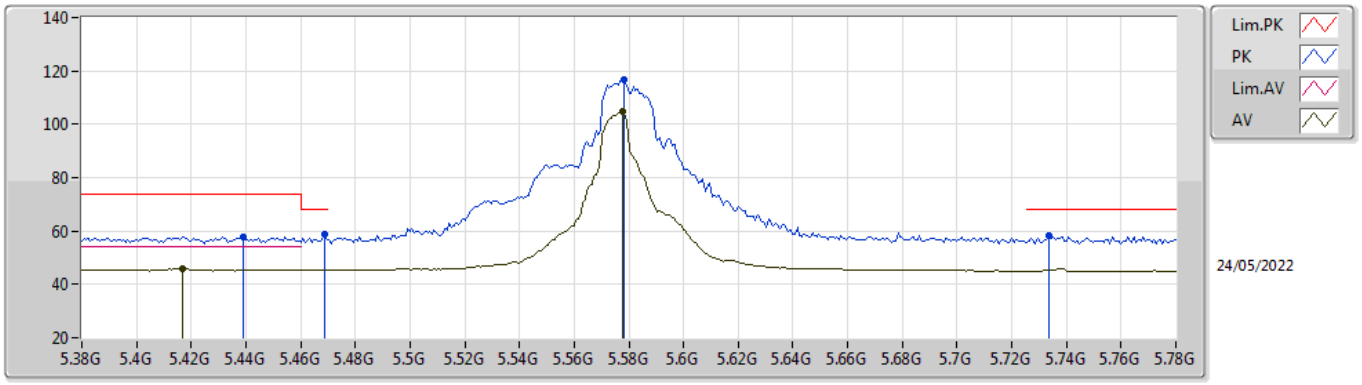


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4392G	57.92	74.00	-16.08	51.51	3	Horizontal	218	1.87	-	34.52	7.24	35.35
AV	5.4168G	46.04	54.00	-7.96	39.60	3	Horizontal	218	1.87	-	34.57	7.22	35.35
PK	5.4688G	58.55	68.20	-9.65	52.09	3	Horizontal	218	1.87	-	34.54	7.27	35.35
PK	5.5784G	116.49	Inf	-Inf	109.90	3	Horizontal	218	1.87	-	34.60	7.38	35.39
AV	5.5776G	105.05	Inf	-Inf	98.46	3	Horizontal	218	1.87	-	34.60	7.38	35.39
PK	5.7336G	58.20	68.20	-10.00	52.04	3	Horizontal	218	1.87	-	34.23	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

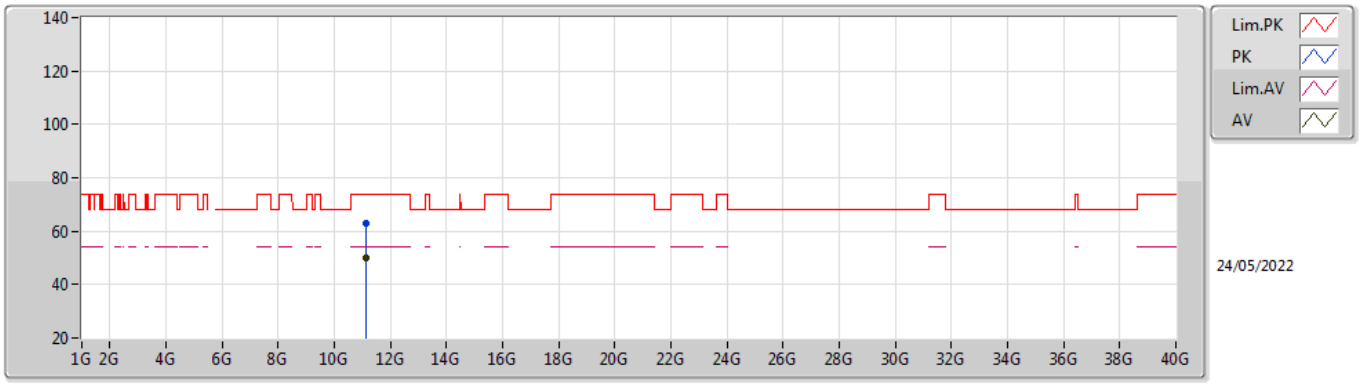


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.15106G	62.69	74.00	-11.31	48.68	3	Vertical	189	2.62	-	38.55	10.67	35.21
AV	11.15136G	50.01	54.00	-3.99	36.00	3	Vertical	189	2.62	-	38.55	10.67	35.21

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

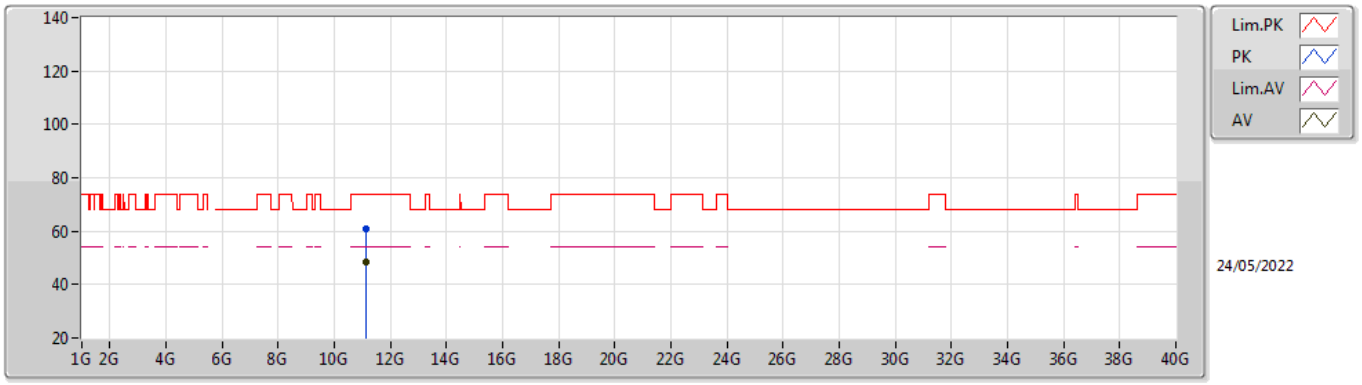


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1495G	61.08	74.00	-12.92	47.07	3	Horizontal	241	2.08	-	38.55	10.67	35.21
AV	11.15118G	48.35	54.00	-5.65	34.34	3	Horizontal	241	2.08	-	38.55	10.67	35.21

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

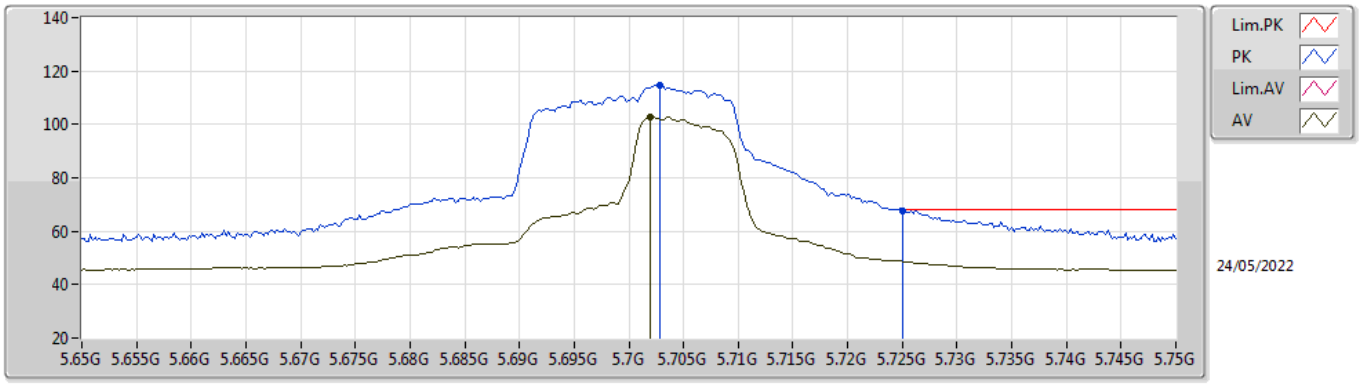


EUT X_1TX
Setting 17.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7028G	114.74	Inf	-Inf	108.50	3	Vertical	214	1.80	-	34.29	7.40	35.45
AV	5.702G	102.82	Inf	-Inf	96.57	3	Vertical	214	1.80	-	34.30	7.40	35.45
PK	5.725G	67.77	68.20	-0.43	61.58	3	Vertical	214	1.80	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

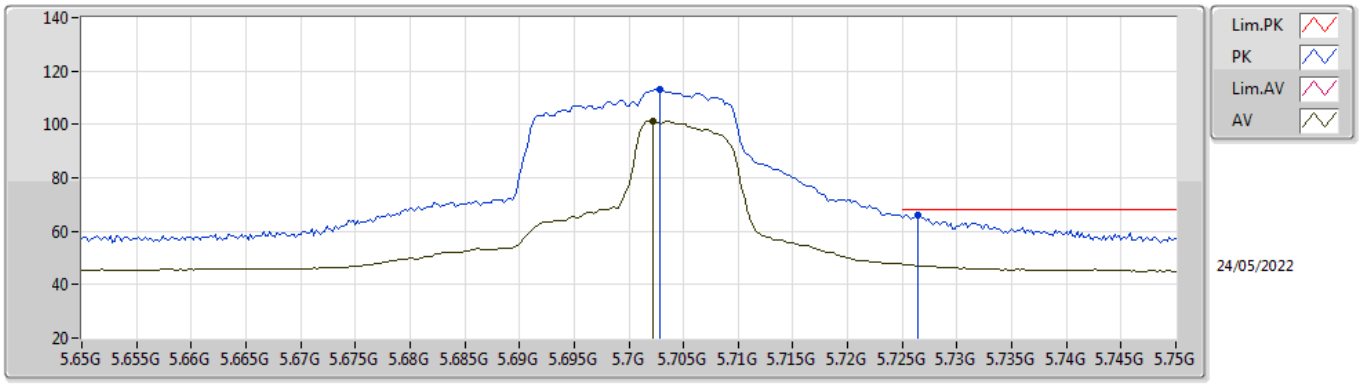


EUT X_1TX
Setting 17.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7028G	113.35	Inf	-Inf	107.11	3	Horizontal	218	1.87	-	34.29	7.40	35.45
AV	5.7022G	101.32	Inf	-Inf	95.07	3	Horizontal	218	1.87	-	34.30	7.40	35.45
PK	5.7264G	66.16	68.20	-2.04	59.97	3	Horizontal	218	1.87	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

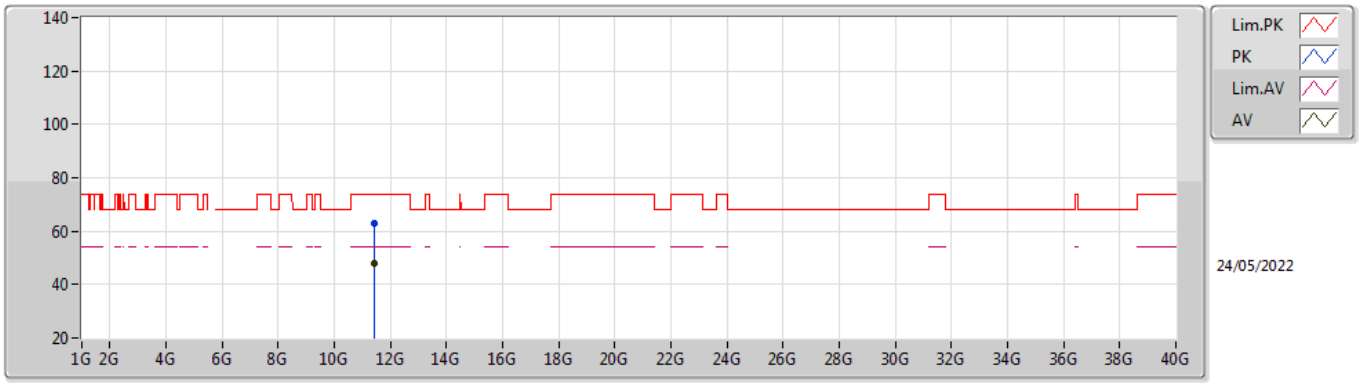


EUT X_1TX
Setting 17.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4087G	62.77	74.00	-11.23	48.74	3	Vertical	191	2.83	-	38.82	10.71	35.50
AV	11.40624G	47.99	54.00	-6.01	33.96	3	Vertical	191	2.83	-	38.81	10.71	35.49

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

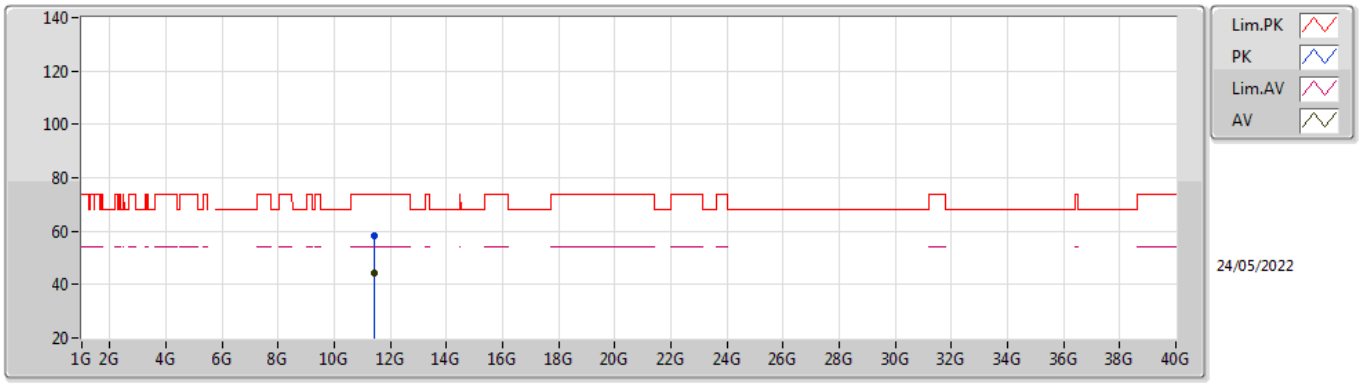


EUT X_1TX
Setting 17.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.40804G	58.18	74.00	-15.82	44.15	3	Horizontal	39	2.71	-	38.82	10.71	35.50
AV	11.40888G	44.43	54.00	-9.57	30.40	3	Horizontal	39	2.71	-	38.82	10.71	35.50

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

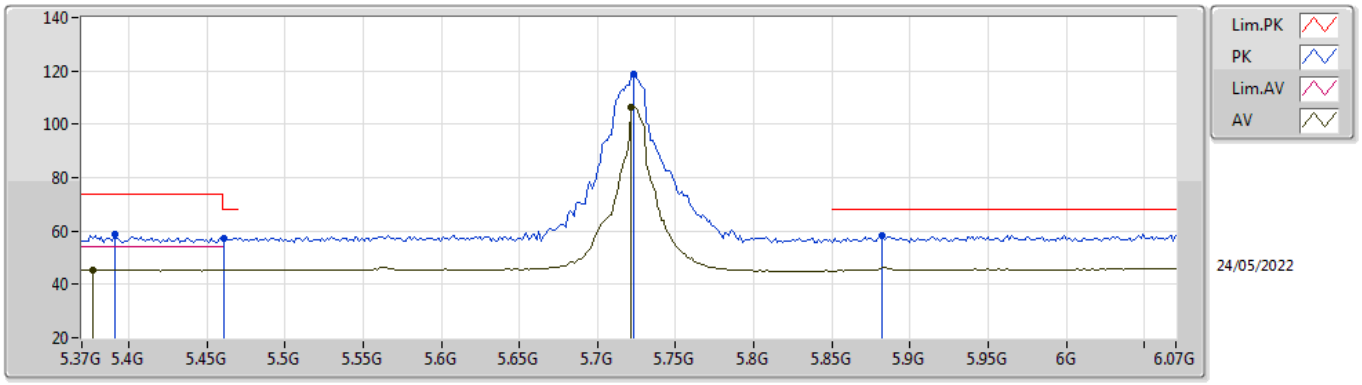


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.391G	58.64	74.00	-15.36	52.21	3	Vertical	213	1.58	-	34.58	7.20	35.35
AV	5.377G	45.34	54.00	-8.66	38.94	3	Vertical	213	1.58	-	34.55	7.20	35.35
PK	5.461G	57.36	68.20	-10.84	50.93	3	Vertical	213	1.58	-	34.52	7.26	35.35
PK	5.7228G	118.56	Inf	-Inf	112.37	3	Vertical	213	1.58	-	34.25	7.40	35.46
AV	5.7214G	106.57	Inf	-Inf	100.37	3	Vertical	213	1.58	-	34.26	7.40	35.46
PK	5.8824G	58.22	68.20	-9.98	51.79	3	Vertical	213	1.58	-	34.49	7.48	35.54

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

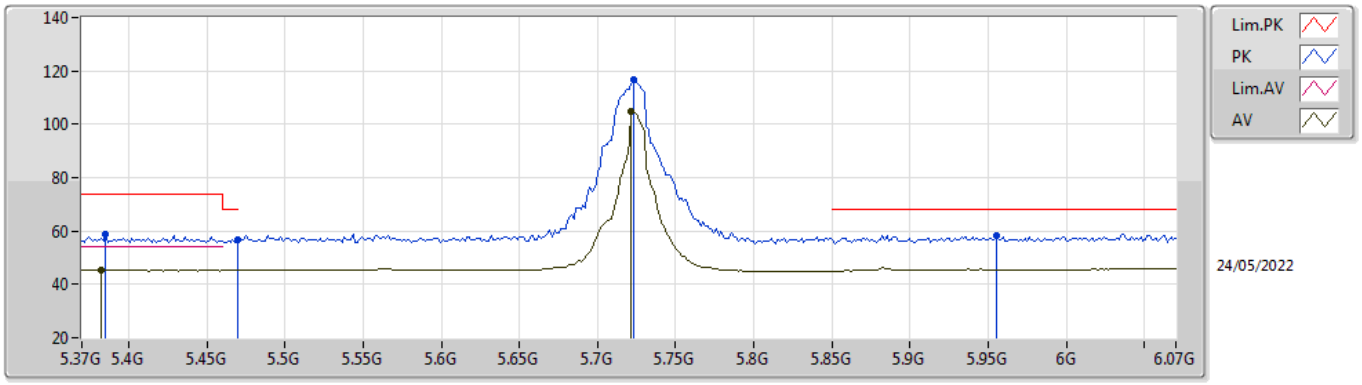


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3854G	58.60	74.00	-15.40	52.18	3	Horizontal	216	2.60	-	34.57	7.20	35.35
AV	5.3826G	45.29	54.00	-8.71	38.87	3	Horizontal	216	2.60	-	34.57	7.20	35.35
PK	5.4694G	56.76	68.20	-11.44	50.30	3	Horizontal	216	2.60	-	34.54	7.27	35.35
PK	5.7228G	116.72	Inf	-Inf	110.53	3	Horizontal	216	2.60	-	34.25	7.40	35.46
AV	5.7214G	104.67	Inf	-Inf	98.47	3	Horizontal	216	2.60	-	34.26	7.40	35.46
PK	5.9552G	58.34	68.20	-9.86	51.56	3	Horizontal	216	2.60	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

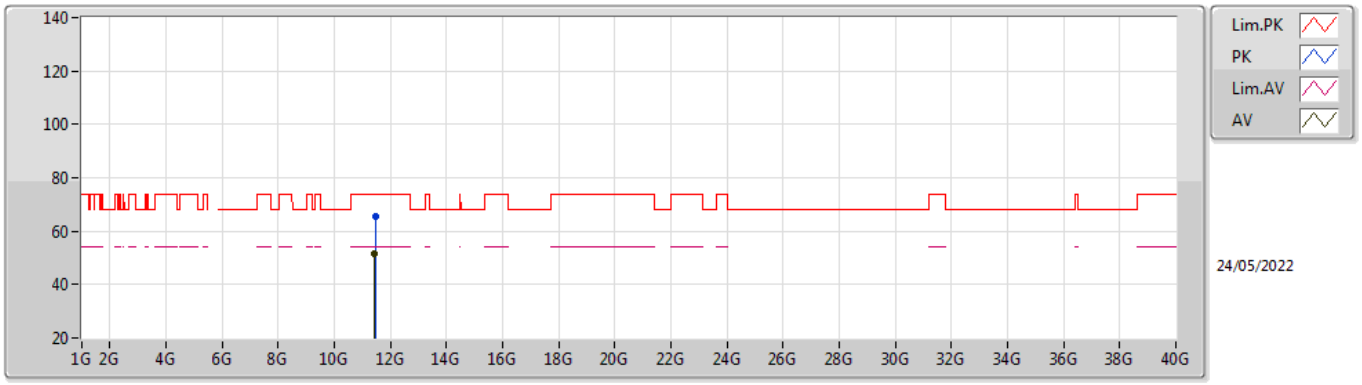


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4511G	65.34	74.00	-8.66	51.27	3	Vertical	192	2.82	-	38.90	10.72	35.55
AV	11.44858G	51.46	54.00	-2.54	37.38	3	Vertical	192	2.82	-	38.90	10.72	35.54

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

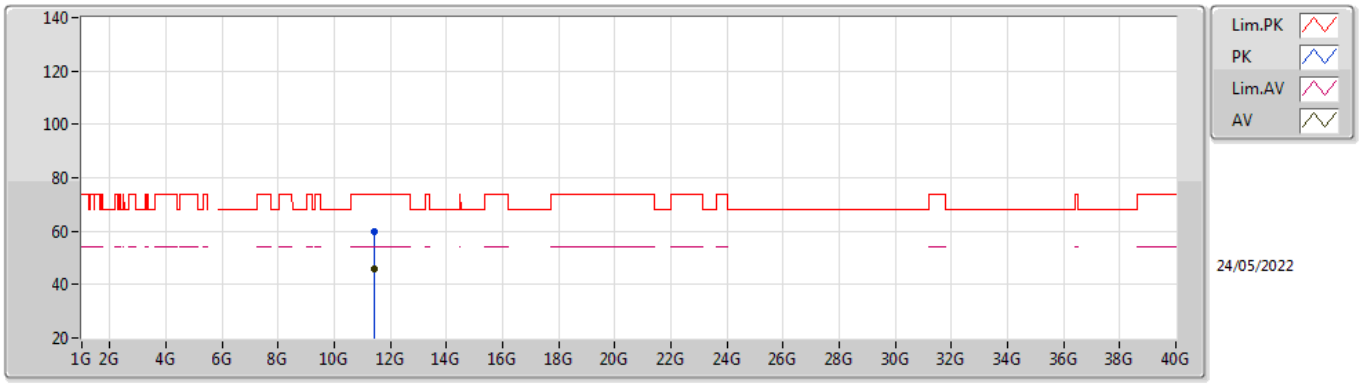


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.44432G	59.67	74.00	-14.33	45.60	3	Horizontal	132	2.10	-	38.89	10.72	35.54
AV	11.44852G	46.05	54.00	-7.95	31.97	3	Horizontal	132	2.10	-	38.90	10.72	35.54

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

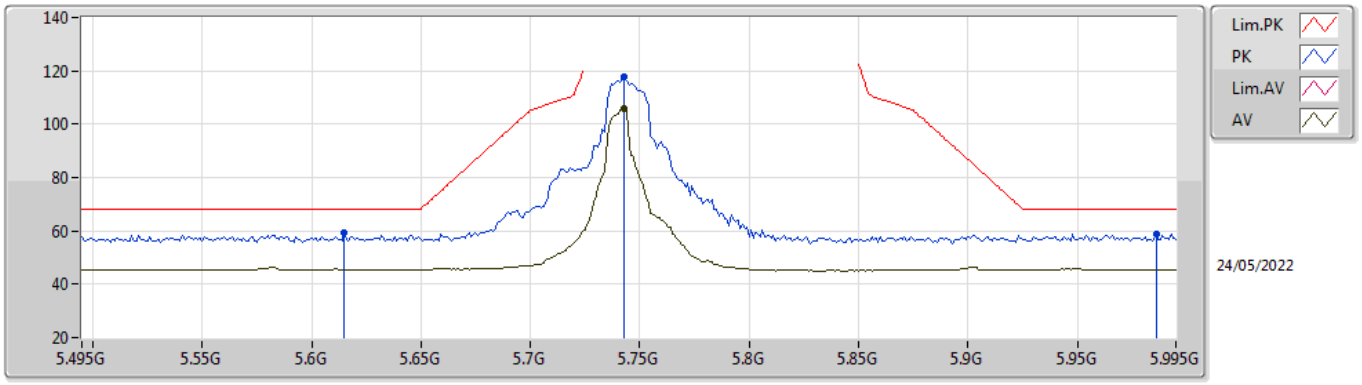


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.615G	59.24	68.20	-8.96	52.68	3	Vertical	213	1.66	-	34.57	7.40	35.41
PK	5.743G	117.64	Inf	-Inf	111.50	3	Vertical	213	1.66	-	34.21	7.40	35.47
AV	5.743G	106.07	Inf	-Inf	99.93	3	Vertical	213	1.66	-	34.21	7.40	35.47
PK	5.986G	59.01	68.20	-9.19	52.21	3	Vertical	213	1.66	-	34.80	7.59	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

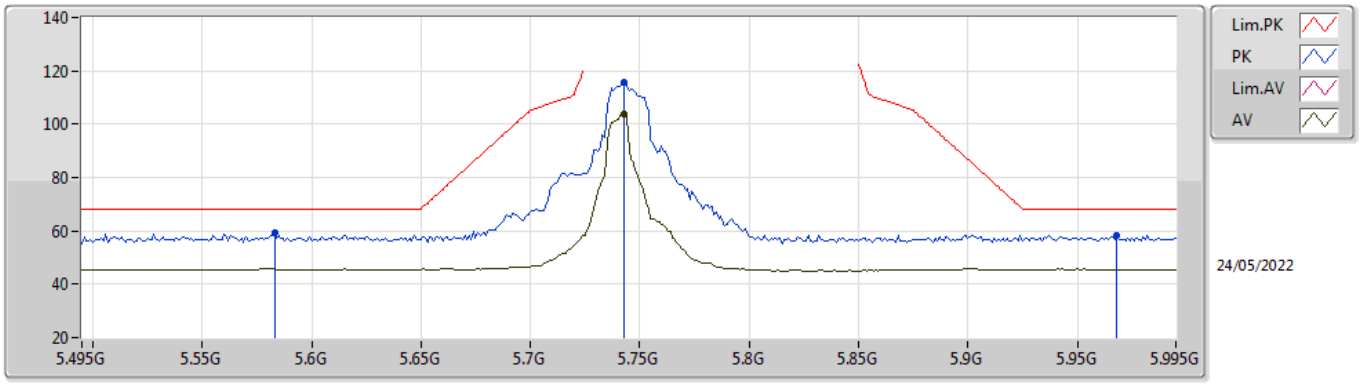


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.583G	59.50	68.20	-8.70	52.91	3	Horizontal	213	1.89	-	34.60	7.38	35.39
PK	5.743G	115.66	Inf	-Inf	109.52	3	Horizontal	213	1.89	-	34.21	7.40	35.47
AV	5.743G	104.05	Inf	-Inf	97.91	3	Horizontal	213	1.89	-	34.21	7.40	35.47
PK	5.968G	58.45	68.20	-9.75	51.66	3	Horizontal	213	1.89	-	34.80	7.57	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

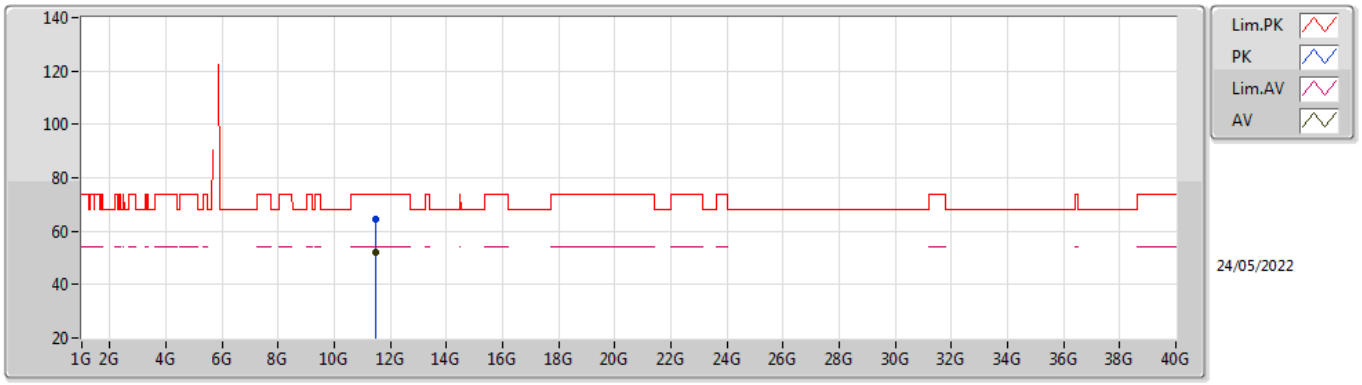


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.47932G	64.37	74.00	-9.63	50.27	3	Vertical	189	2.79	-	38.96	10.72	35.58
AV	11.4813G	52.04	54.00	-1.96	37.94	3	Vertical	189	2.79	-	38.96	10.72	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

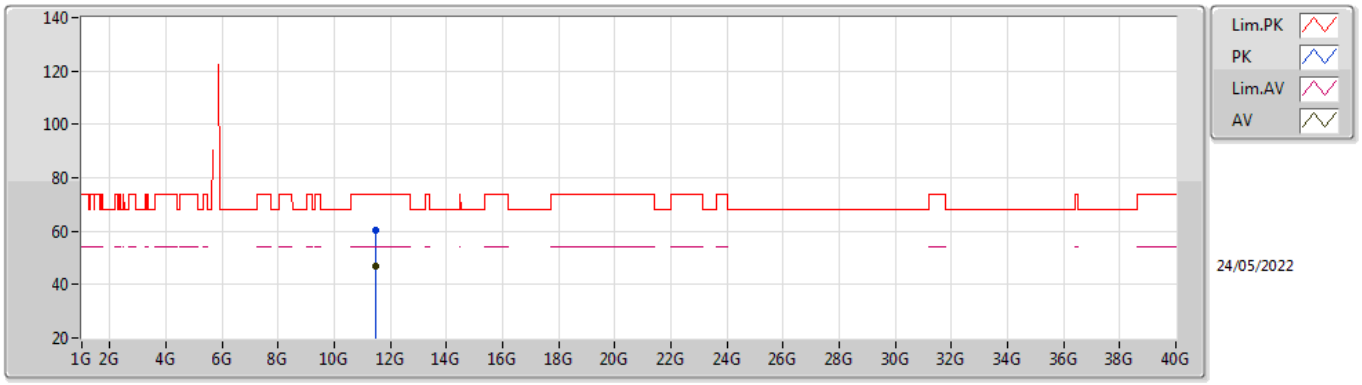


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.47932G	60.13	74.00	-13.87	46.03	3	Horizontal	153	2.07	-	38.96	10.72	35.58
AV	11.48124G	46.66	54.00	-7.34	32.56	3	Horizontal	153	2.07	-	38.96	10.72	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

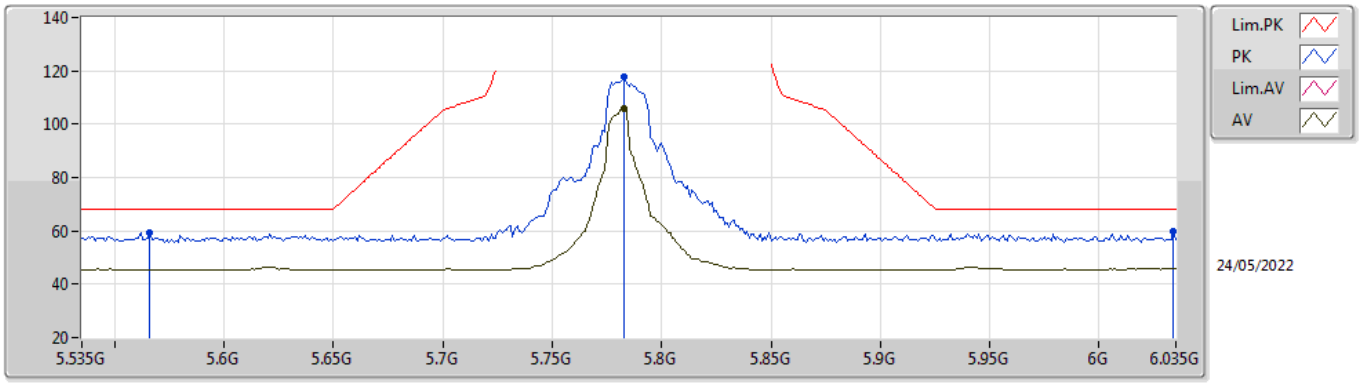


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.566G	59.42	68.20	-8.78	52.83	3	Vertical	213	1.75	-	34.60	7.37	35.38
PK	5.783G	117.54	Inf	-Inf	111.43	3	Vertical	213	1.75	-	34.20	7.40	35.49
AV	5.783G	106.04	Inf	-Inf	99.93	3	Vertical	213	1.75	-	34.20	7.40	35.49
PK	6.034G	59.67	68.20	-8.53	52.77	3	Vertical	213	1.75	-	34.87	7.62	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

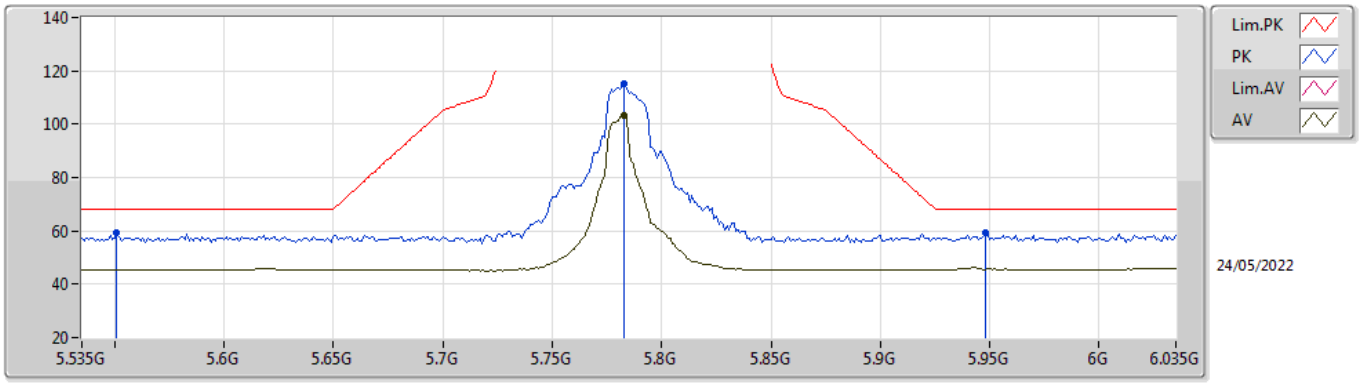


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.551G	59.35	68.20	-8.85	52.78	3	Horizontal	219	1.80	-	34.60	7.35	35.38
PK	5.783G	115.03	Inf	-Inf	108.92	3	Horizontal	219	1.80	-	34.20	7.40	35.49
AV	5.783G	103.51	Inf	-Inf	97.40	3	Horizontal	219	1.80	-	34.20	7.40	35.49
PK	5.948G	59.10	68.20	-9.10	52.33	3	Horizontal	219	1.80	-	34.79	7.55	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

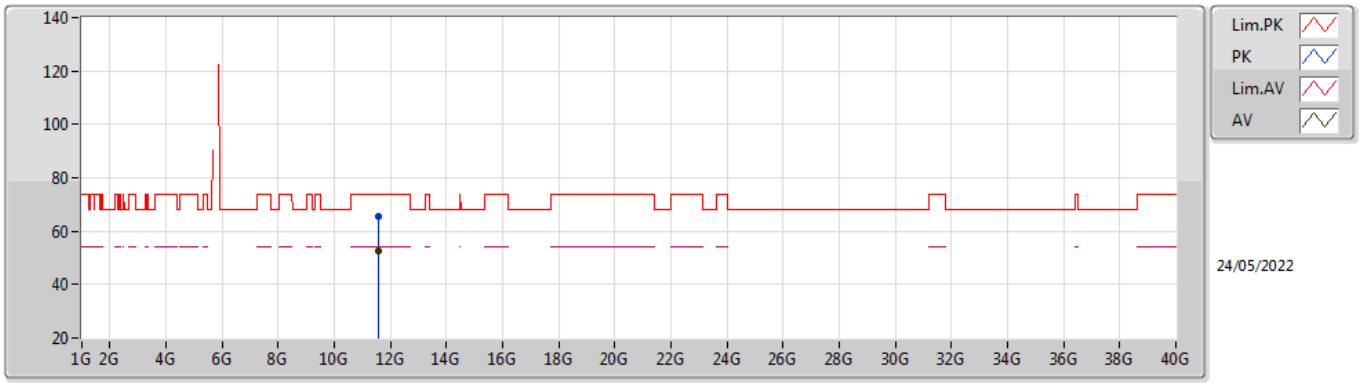


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.56886G	65.39	74.00	-8.61	50.95	3	Vertical	187	2.83	-	39.28	10.74	35.58
AV	11.5613G	52.56	54.00	-1.44	38.17	3	Vertical	187	2.83	-	39.25	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

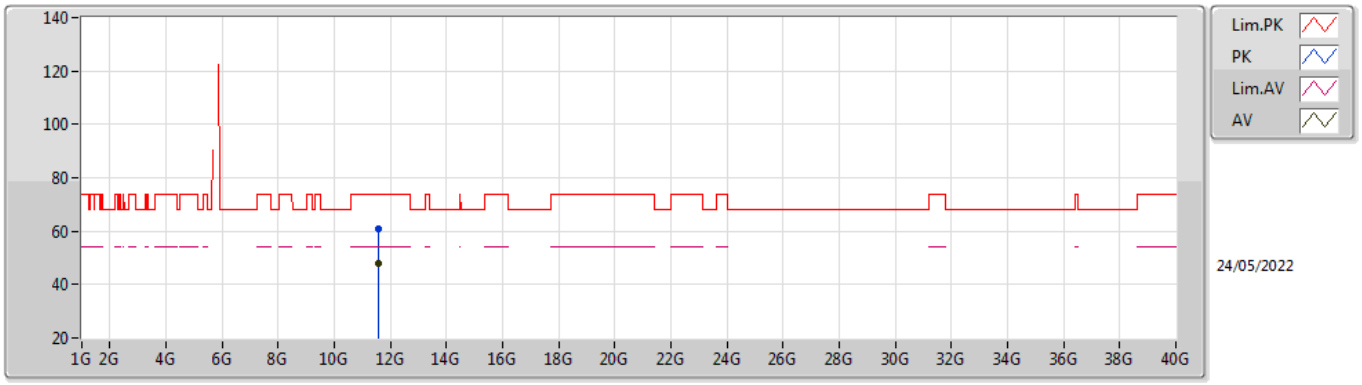


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.56112G	60.84	74.00	-13.16	46.46	3	Horizontal	149	2.00	-	39.24	10.73	35.59
AV	11.56124G	48.03	54.00	-5.97	33.65	3	Horizontal	149	2.00	-	39.24	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

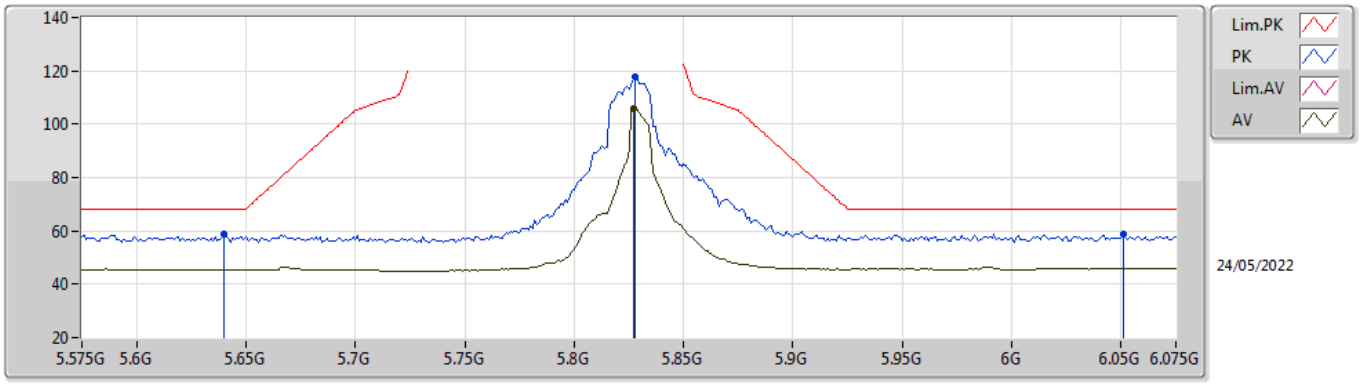


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.64G	58.66	68.20	-9.54	52.16	3	Vertical	213	1.72	-	34.52	7.40	35.42
PK	5.828G	117.80	Inf	-Inf	111.62	3	Vertical	213	1.72	-	34.26	7.43	35.51
AV	5.827G	105.72	Inf	-Inf	99.55	3	Vertical	213	1.72	-	34.25	7.43	35.51
PK	6.051G	58.89	68.20	-9.31	51.94	3	Vertical	213	1.72	-	34.90	7.63	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

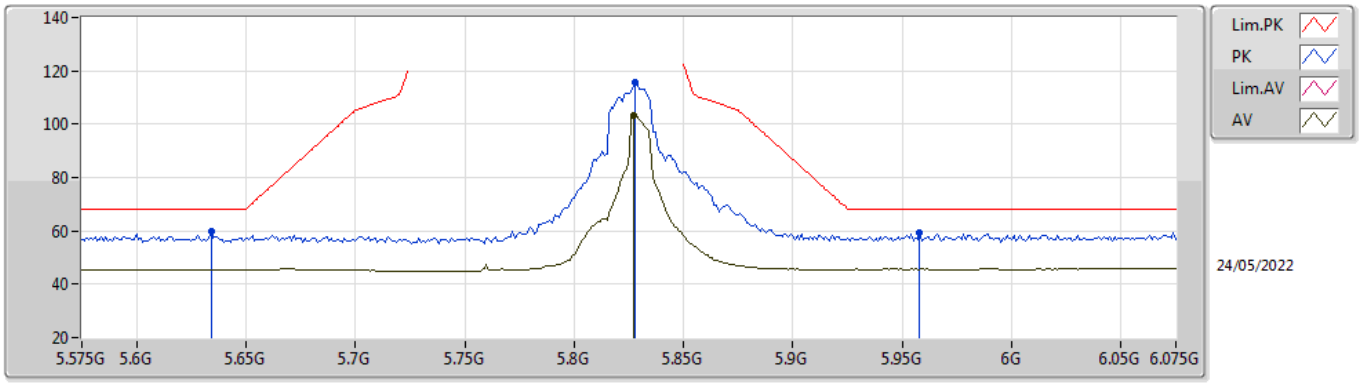


EUT X_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.634G	59.79	68.20	-8.41	53.28	3	Horizontal	222	1.85	-	34.53	7.40	35.42
PK	5.828G	115.56	Inf	-Inf	109.38	3	Horizontal	222	1.85	-	34.26	7.43	35.51
AV	5.827G	103.40	Inf	-Inf	97.23	3	Horizontal	222	1.85	-	34.25	7.43	35.51
PK	5.958G	59.32	68.20	-8.88	52.54	3	Horizontal	222	1.85	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

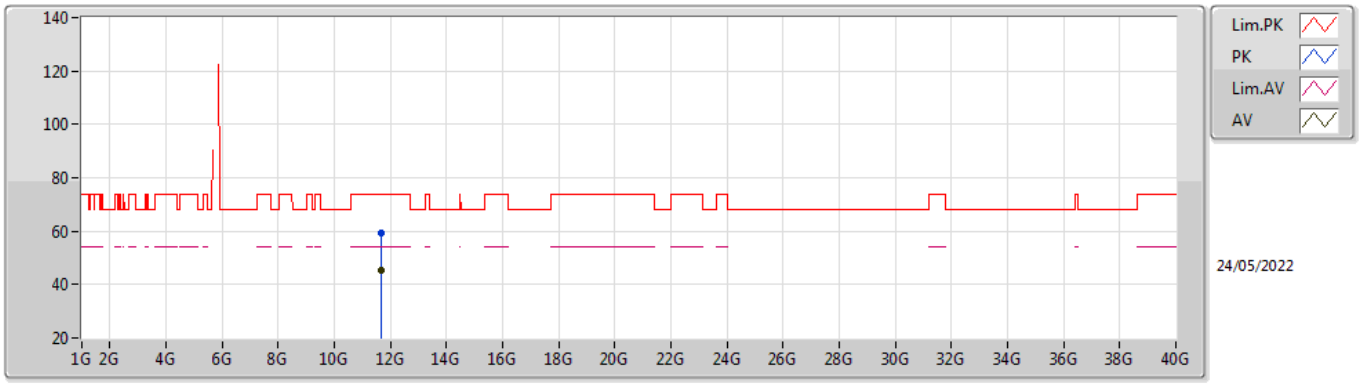


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6587G	59.33	74.00	-14.67	44.75	3	Vertical	324	2.12	-	39.40	10.75	35.57
AV	11.65552G	45.19	54.00	-8.81	30.61	3	Vertical	324	2.12	-	39.40	10.75	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

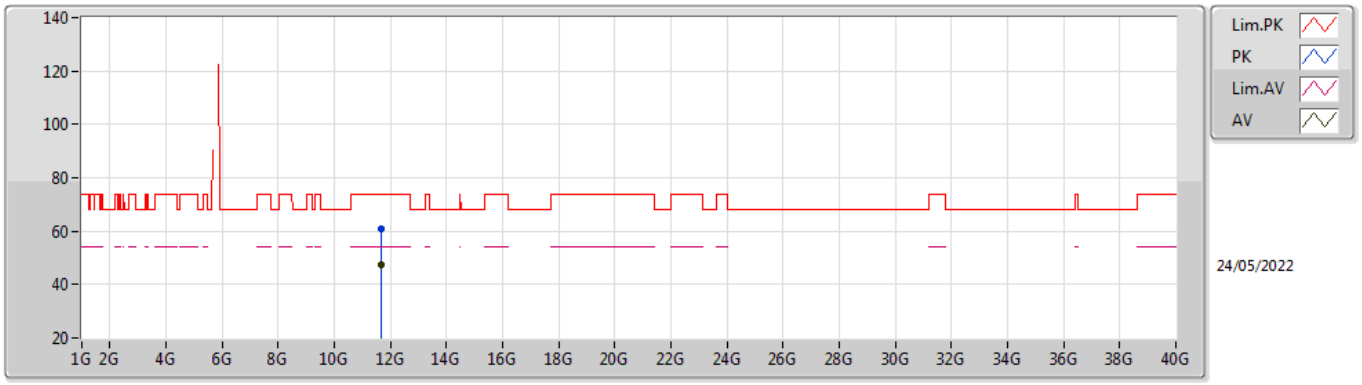

EUT X_1TX
Setting 21.5
03-B-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.66104G	61.10	74.00	-12.90	46.51	3	Horizontal	157	2.07	-	39.40	10.75	35.56
AV	11.65852G	47.56	54.00	-6.44	32.98	3	Horizontal	157	2.07	-	39.40	10.75	35.57

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	AV	11.4568G	53.79	54.00	-0.21	3	Vertical	180	2.43	-

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

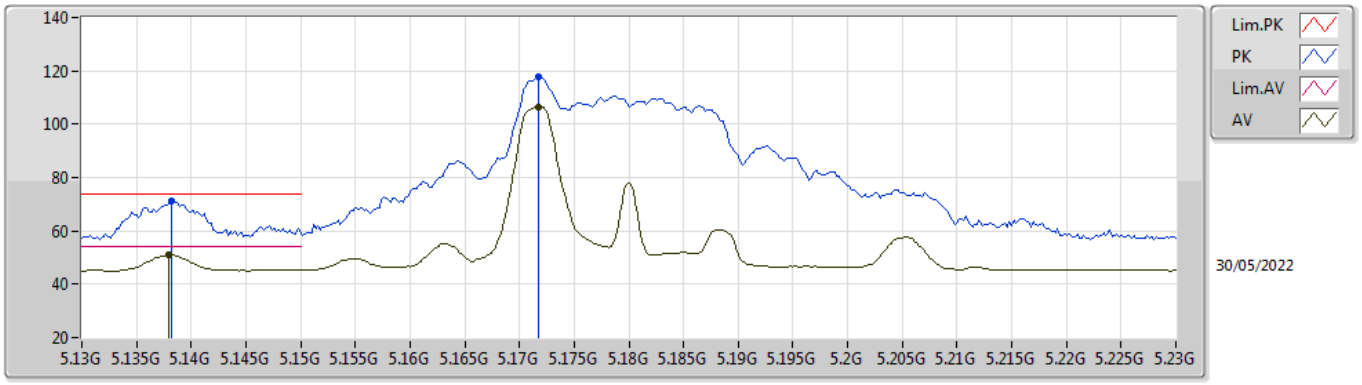


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1382G	71.05	74.00	-2.95	65.24	3	Vertical	48	1.80	-	33.98	7.17	35.34
AV	5.138G	50.96	54.00	-3.04	45.15	3	Vertical	48	1.80	-	33.98	7.17	35.34
PK	5.1718G	117.88	Inf	-Inf	111.94	3	Vertical	48	1.80	-	34.09	7.19	35.34
AV	5.1718G	106.35	Inf	-Inf	100.41	3	Vertical	48	1.80	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

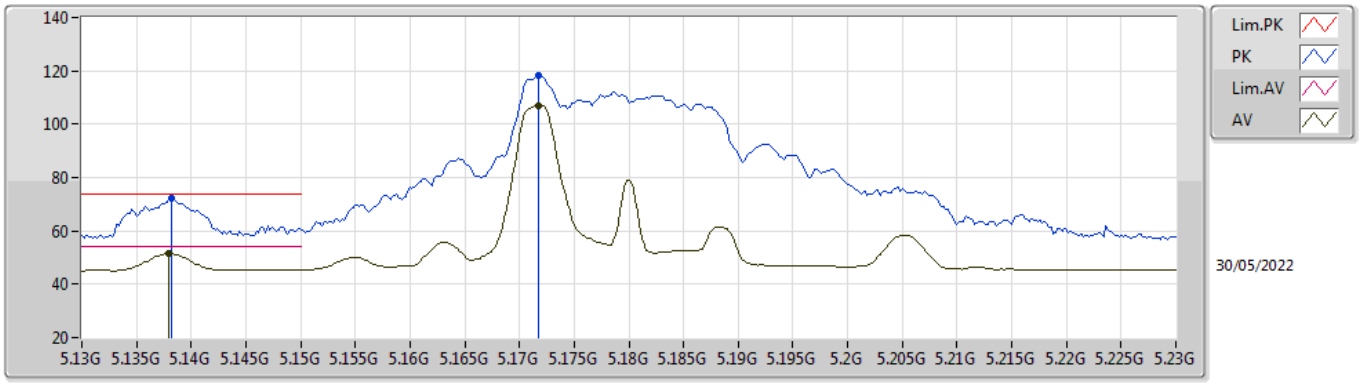


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1382G	72.04	74.00	-1.96	66.23	3	Horizontal	183	2.43	-	33.98	7.17	35.34
AV	5.138G	51.49	54.00	-2.51	45.68	3	Horizontal	183	2.43	-	33.98	7.17	35.34
PK	5.1718G	118.48	Inf	-Inf	112.54	3	Horizontal	183	2.43	-	34.09	7.19	35.34
AV	5.1718G	106.98	Inf	-Inf	101.04	3	Horizontal	183	2.43	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

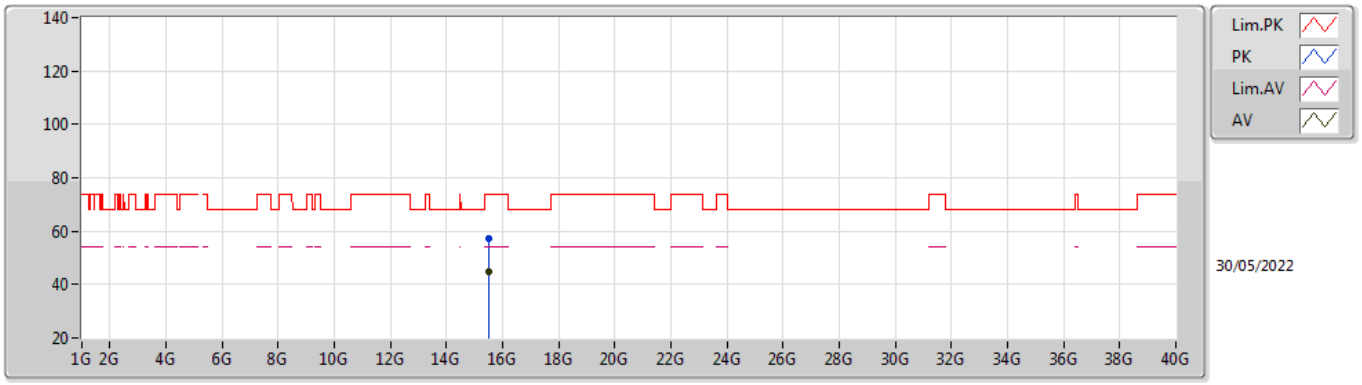


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.4934G	57.44	74.00	-16.56	40.94	3	Vertical	278	2.38	-	38.71	13.15	35.36
AV	15.4992G	44.87	54.00	-9.13	28.39	3	Vertical	278	2.38	-	38.70	13.15	35.37

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

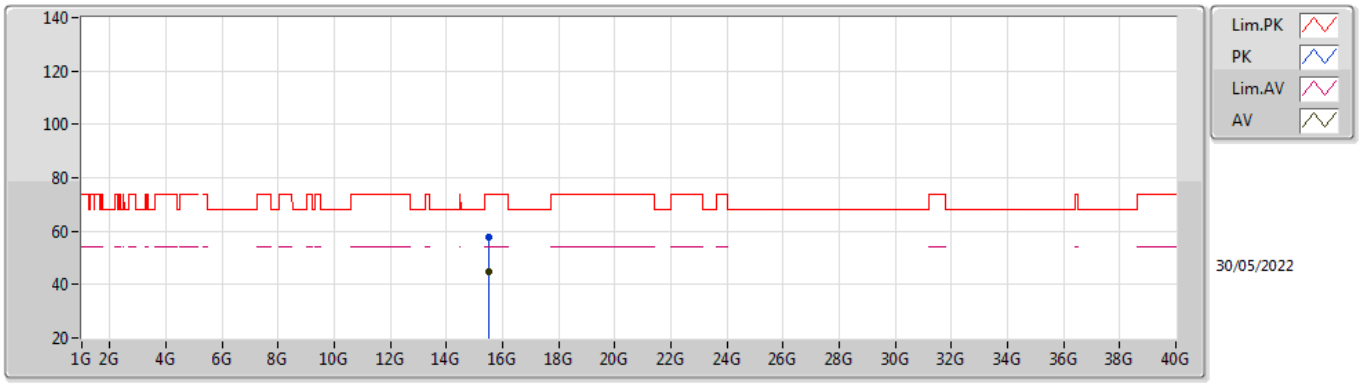


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5298G	58.01	74.00	-15.99	41.76	3	Horizontal	306	2.61	-	38.49	13.16	35.40
AV	15.4992G	44.73	54.00	-9.27	28.25	3	Horizontal	306	2.61	-	38.70	13.15	35.37

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

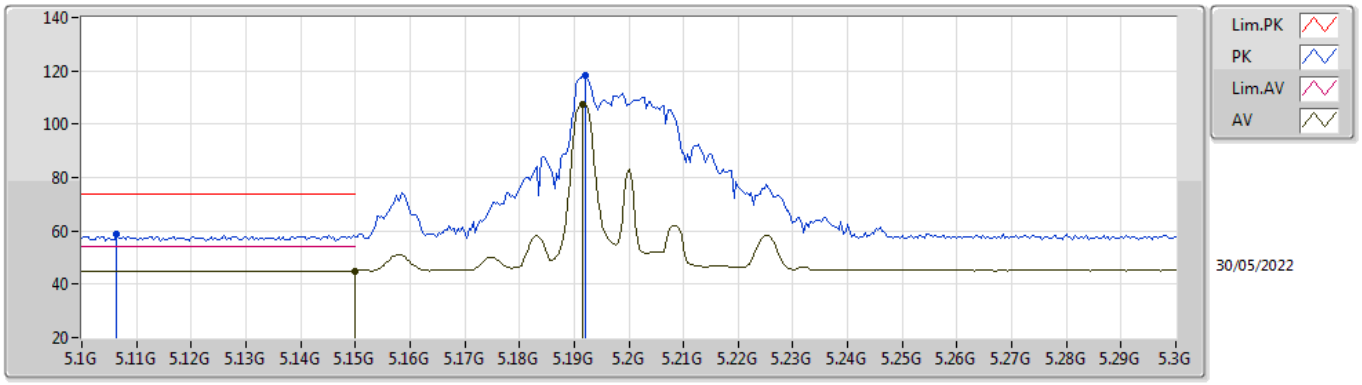


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1064G	58.61	74.00	-15.39	52.88	3	Vertical	216	1.80	-	33.91	7.15	35.33
AV	5.15G	45.01	54.00	-8.99	39.18	3	Vertical	216	1.80	-	34.00	7.17	35.34
PK	5.192G	118.30	Inf	-Inf	112.27	3	Vertical	216	1.80	-	34.17	7.20	35.34
AV	5.1916G	107.16	Inf	-Inf	101.13	3	Vertical	216	1.80	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

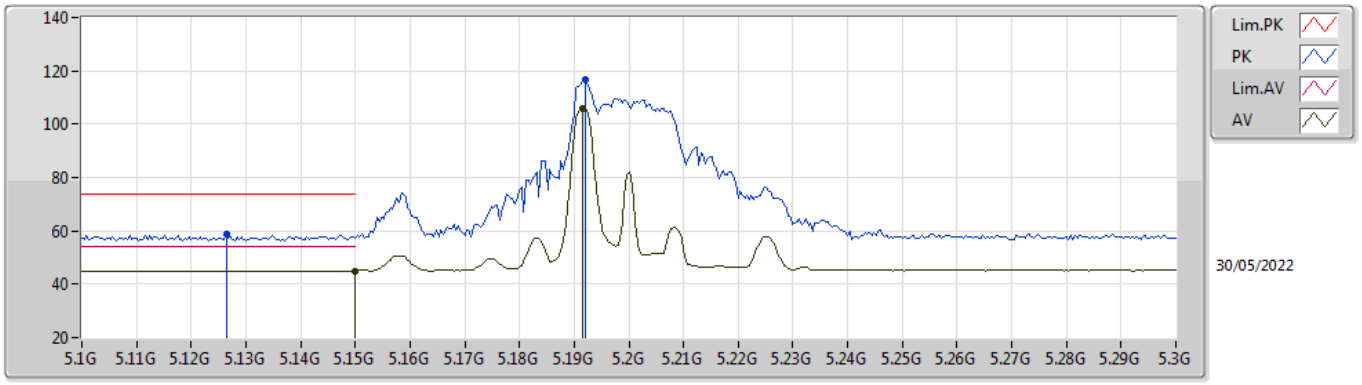


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1264G	58.63	74.00	-15.37	52.86	3	Horizontal	177	1.80	-	33.95	7.16	35.34
AV	5.15G	44.92	54.00	-9.08	39.09	3	Horizontal	177	1.80	-	34.00	7.17	35.34
PK	5.192G	116.68	Inf	-Inf	110.65	3	Horizontal	177	1.80	-	34.17	7.20	35.34
AV	5.1916G	105.61	Inf	-Inf	99.58	3	Horizontal	177	1.80	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

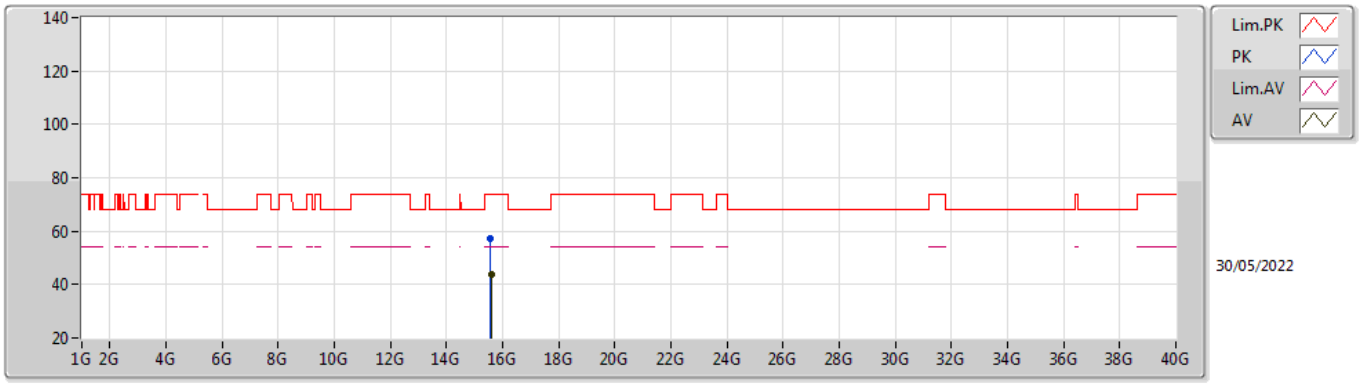


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5726G	57.23	74.00	-16.77	41.28	3	Vertical	254	2.91	-	38.19	13.19	35.43
AV	15.5912G	44.00	54.00	-10.00	28.19	3	Vertical	254	2.91	-	38.06	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

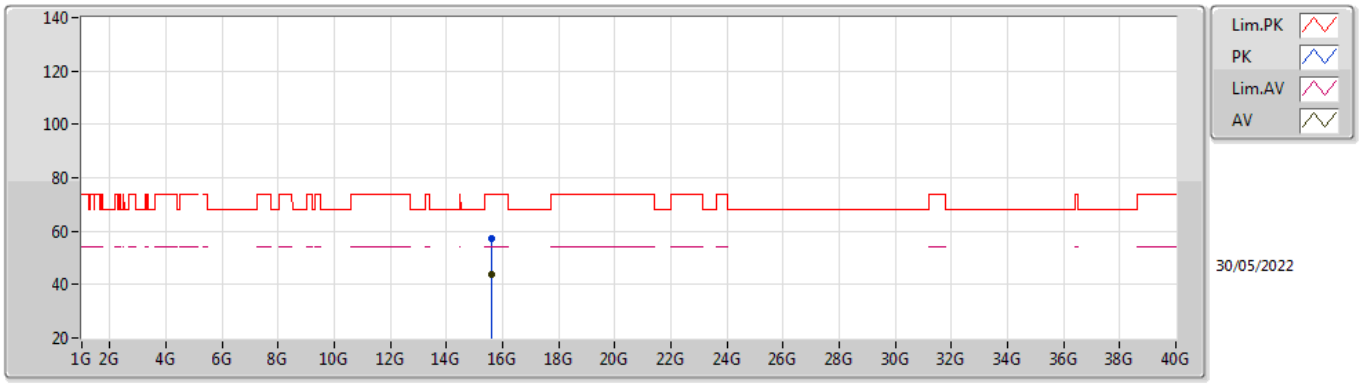


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6236G	57.48	74.00	-16.52	41.86	3	Horizontal	10	3.00	-	37.88	13.21	35.47
AV	15.5826G	43.98	54.00	-10.02	28.11	3	Horizontal	10	3.00	-	38.12	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

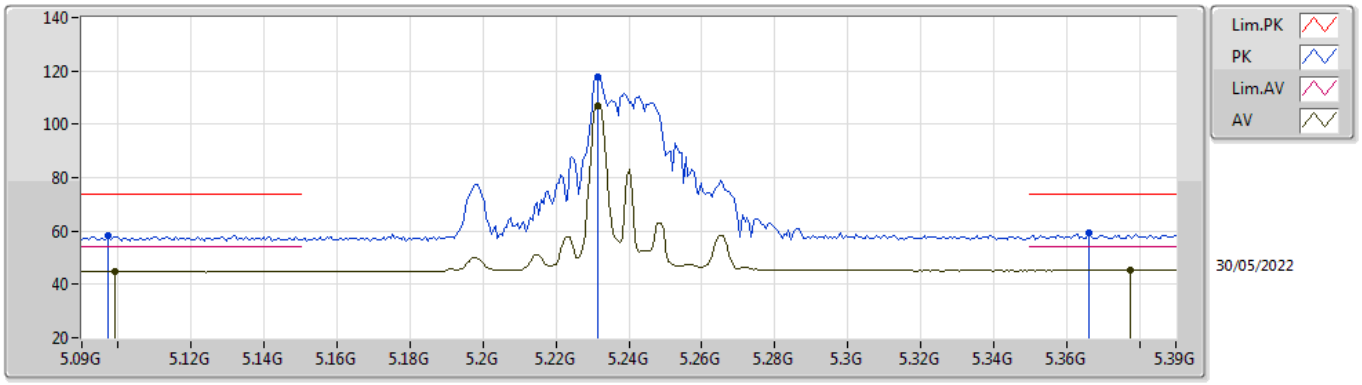


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.0972G	58.29	74.00	-15.71	52.58	3	Vertical	214	1.80	-	33.89	7.15	35.33
AV	5.099G	44.81	54.00	-9.19	39.09	3	Vertical	214	1.80	-	33.90	7.15	35.33
PK	5.2316G	117.96	Inf	-Inf	111.77	3	Vertical	214	1.80	-	34.33	7.20	35.34
AV	5.2316G	107.04	Inf	-Inf	100.85	3	Vertical	214	1.80	-	34.33	7.20	35.34
PK	5.366G	59.08	74.00	-14.92	52.69	3	Vertical	214	1.80	-	34.53	7.20	35.34
AV	5.3774G	45.29	54.00	-8.71	38.89	3	Vertical	214	1.80	-	34.55	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

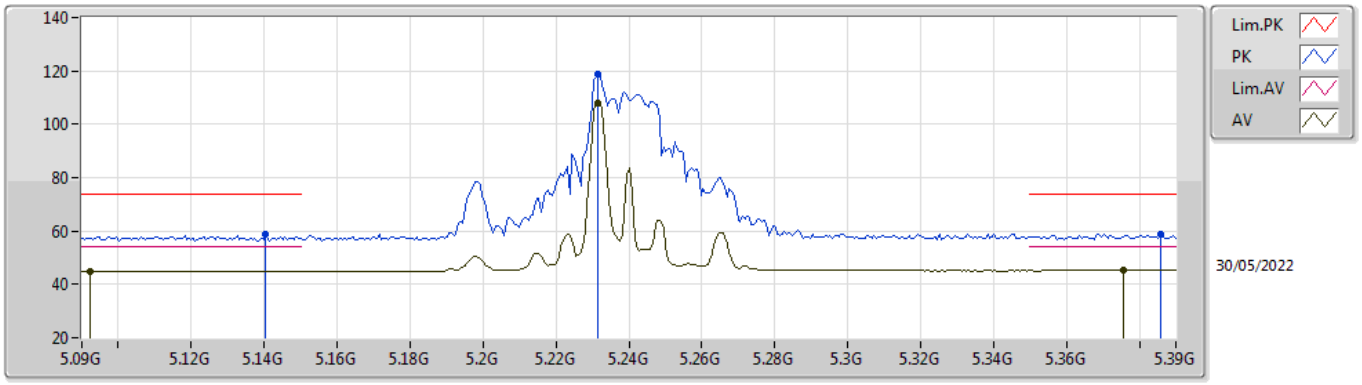


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1404G	58.55	74.00	-15.45	52.74	3	Horizontal	183	2.50	-	33.98	7.17	35.34
AV	5.0924G	44.81	54.00	-9.19	39.11	3	Horizontal	183	2.50	-	33.88	7.15	35.33
PK	5.2316G	118.95	Inf	-Inf	112.76	3	Horizontal	183	2.50	-	34.33	7.20	35.34
AV	5.2316G	107.83	Inf	-Inf	101.64	3	Horizontal	183	2.50	-	34.33	7.20	35.34
PK	5.3858G	58.73	74.00	-15.27	52.31	3	Horizontal	183	2.50	-	34.57	7.20	35.35
AV	5.3756G	45.29	54.00	-8.71	38.89	3	Horizontal	183	2.50	-	34.55	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

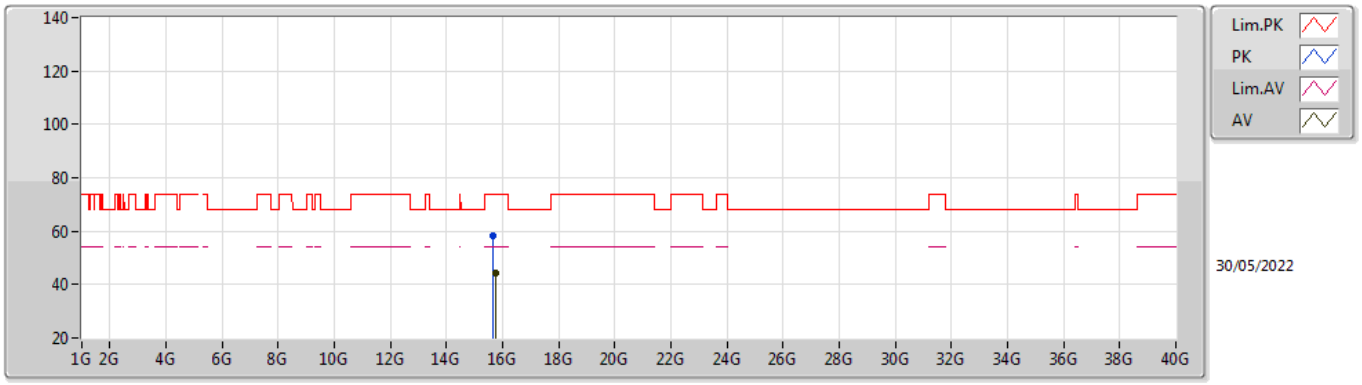


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.672G	58.09	74.00	-15.91	42.72	3	Vertical	253	1.57	-	37.64	13.24	35.51
AV	15.7678G	44.10	54.00	-9.90	28.64	3	Vertical	253	1.57	-	37.77	13.28	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

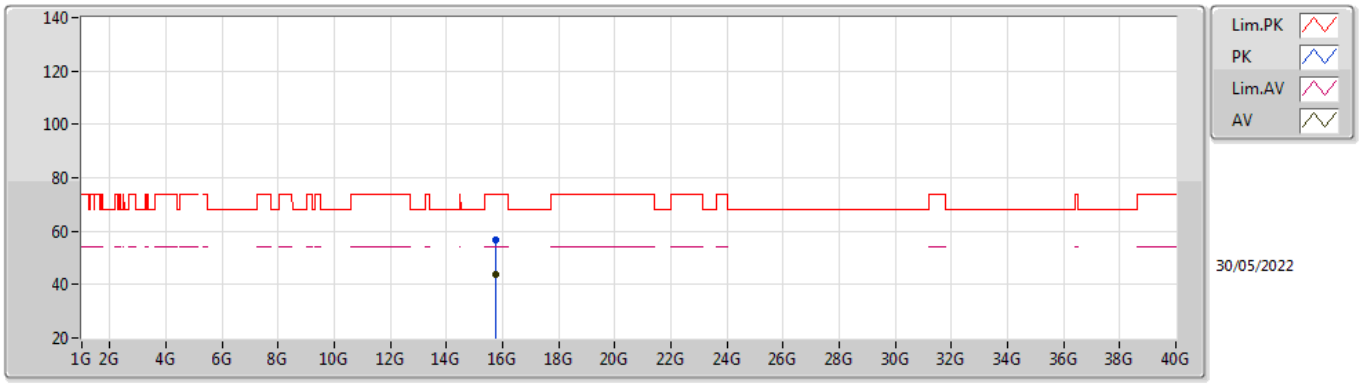


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.761G	56.91	74.00	-17.09	41.48	3	Horizontal	311	1.59	-	37.74	13.28	35.59
AV	15.7618G	44.03	54.00	-9.97	28.59	3	Horizontal	311	1.59	-	37.75	13.28	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

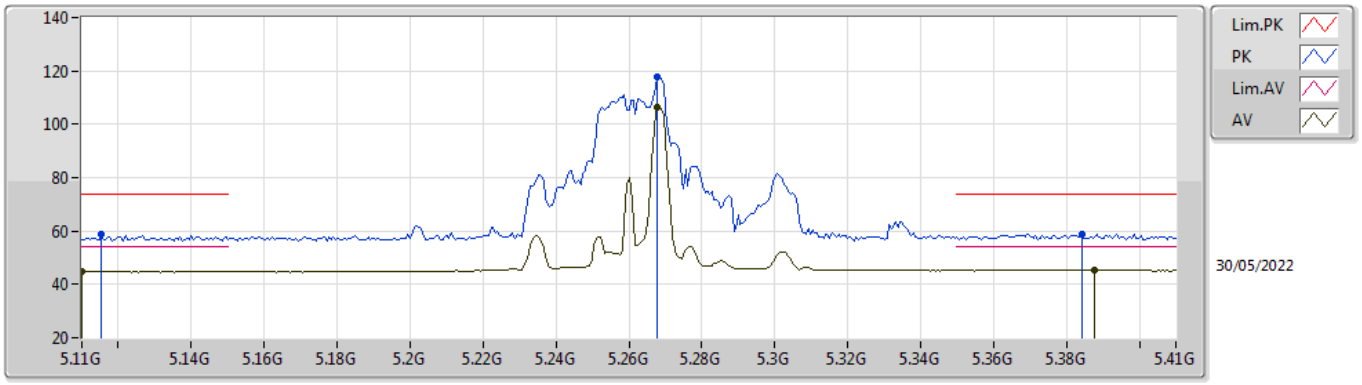


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1154G	58.97	74.00	-15.03	53.21	3	Vertical	83	2.02	-	33.93	7.16	35.33
AV	5.11G	44.77	54.00	-9.23	39.02	3	Vertical	83	2.02	-	33.92	7.16	35.33
PK	5.2678G	117.54	Inf	-Inf	111.24	3	Vertical	83	2.02	-	34.44	7.20	35.34
AV	5.2678G	106.47	Inf	-Inf	100.17	3	Vertical	83	2.02	-	34.44	7.20	35.34
PK	5.3842G	58.80	74.00	-15.20	52.38	3	Vertical	83	2.02	-	34.57	7.20	35.35
AV	5.3878G	45.36	54.00	-8.64	38.93	3	Vertical	83	2.02	-	34.58	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

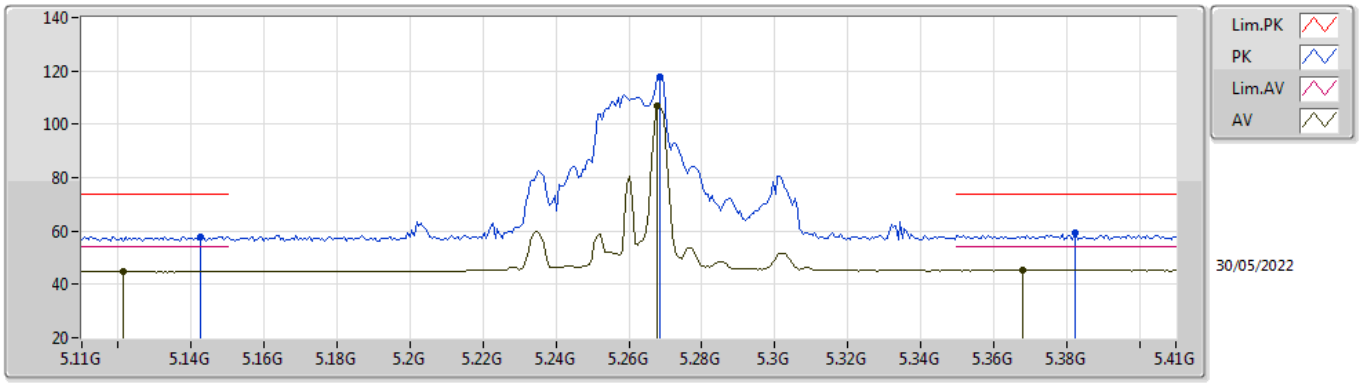


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1424G	57.92	74.00	-16.08	52.11	3	Horizontal	184	2.48	-	33.98	7.17	35.34
AV	5.1214G	44.79	54.00	-9.21	39.02	3	Horizontal	184	2.48	-	33.94	7.16	35.33
PK	5.2684G	117.99	Inf	-Inf	111.69	3	Horizontal	184	2.48	-	34.44	7.20	35.34
AV	5.2678G	106.68	Inf	-Inf	100.38	3	Horizontal	184	2.48	-	34.44	7.20	35.34
PK	5.3824G	59.07	74.00	-14.93	52.66	3	Horizontal	184	2.48	-	34.56	7.20	35.35
AV	5.368G	45.30	54.00	-8.70	38.90	3	Horizontal	184	2.48	-	34.54	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

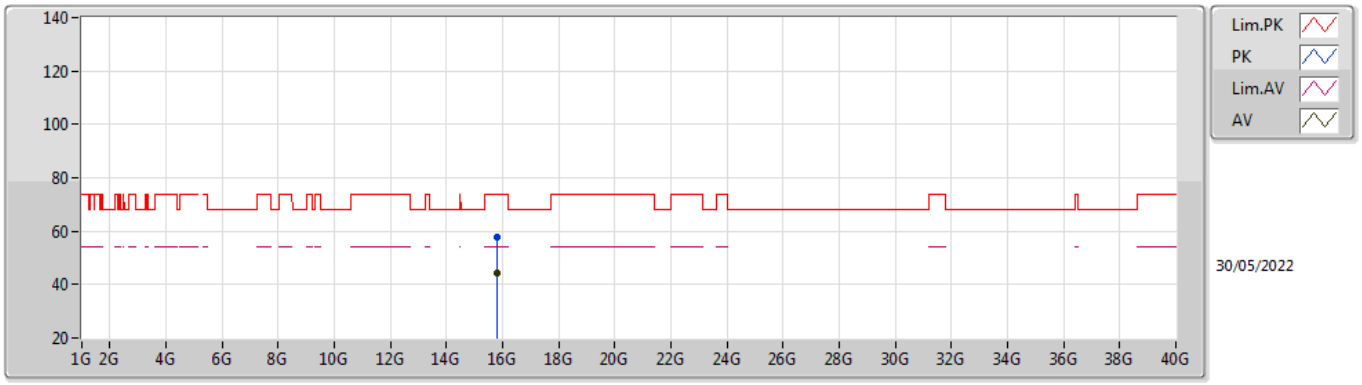


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.808G	57.99	74.00	-16.01	42.44	3	Vertical	320	1.19	-	37.88	13.30	35.63
AV	15.8008G	44.37	54.00	-9.63	28.79	3	Vertical	320	1.19	-	37.90	13.30	35.62

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

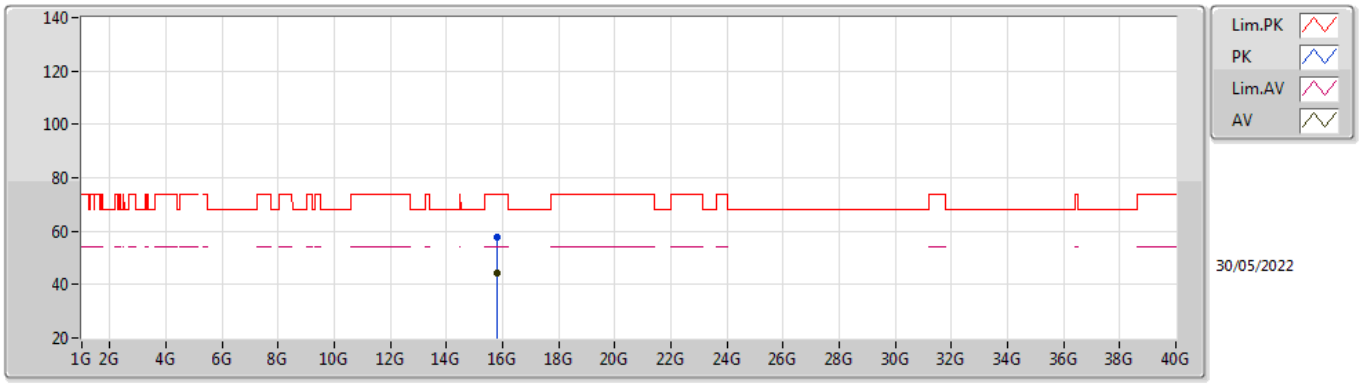


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.8012G	57.81	74.00	-16.19	42.23	3	Horizontal	273	1.73	-	37.90	13.30	35.62
AV	15.824G	44.34	54.00	-9.66	28.84	3	Horizontal	273	1.73	-	37.83	13.31	35.64

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

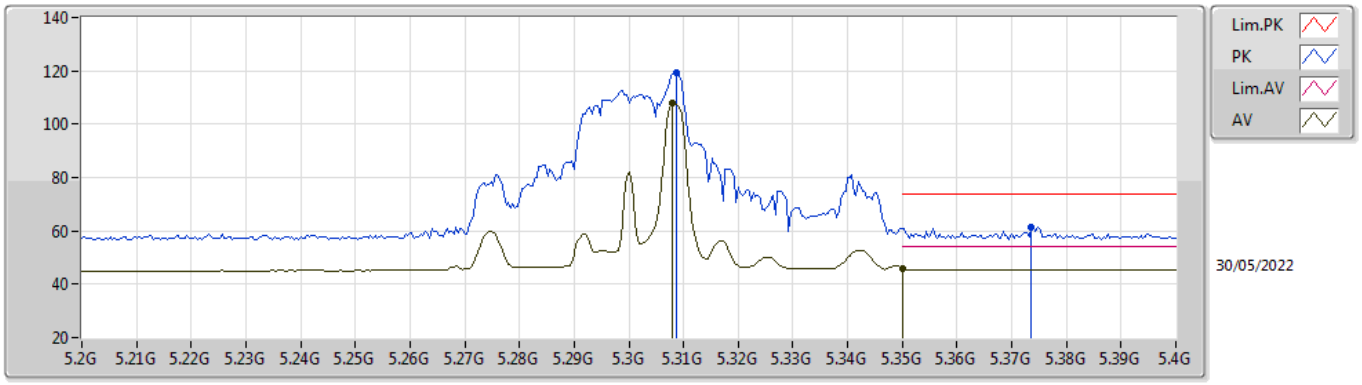


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3088G	119.06	Inf	-Inf	112.70	3	Vertical	83	1.77	-	34.50	7.20	35.34
AV	5.308G	107.97	Inf	-Inf	101.61	3	Vertical	83	1.77	-	34.50	7.20	35.34
PK	5.3736G	61.36	74.00	-12.64	54.95	3	Vertical	83	1.77	-	34.55	7.20	35.34
AV	5.35G	45.67	54.00	-8.33	39.31	3	Vertical	83	1.77	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

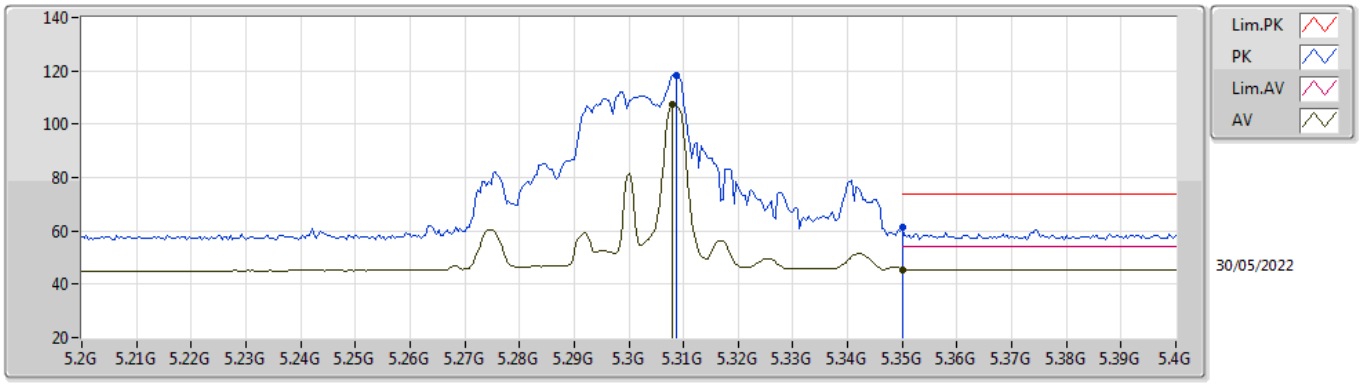


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3088G	118.47	Inf	-Inf	112.11	3	Horizontal	189	2.46	-	34.50	7.20	35.34
AV	5.308G	107.35	Inf	-Inf	100.99	3	Horizontal	189	2.46	-	34.50	7.20	35.34
PK	5.35G	61.17	74.00	-12.83	54.81	3	Horizontal	189	2.46	-	34.50	7.20	35.34
AV	5.35G	45.44	54.00	-8.56	39.08	3	Horizontal	189	2.46	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

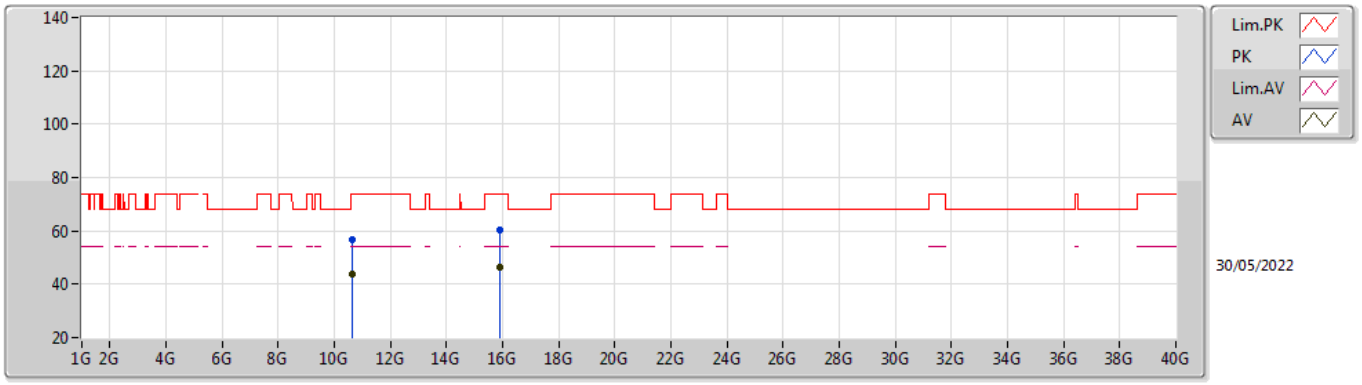


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6156G	56.58	74.00	-17.42	43.13	3	Vertical	208	1.69	-	38.23	10.59	35.37
AV	10.6166G	43.57	54.00	-10.43	30.12	3	Vertical	208	1.69	-	38.23	10.59	35.37
PK	15.925G	60.47	74.00	-13.53	45.29	3	Vertical	156	1.80	-	37.55	13.36	35.73
AV	15.9252G	46.52	54.00	-7.48	31.34	3	Vertical	156	1.80	-	37.55	13.36	35.73

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

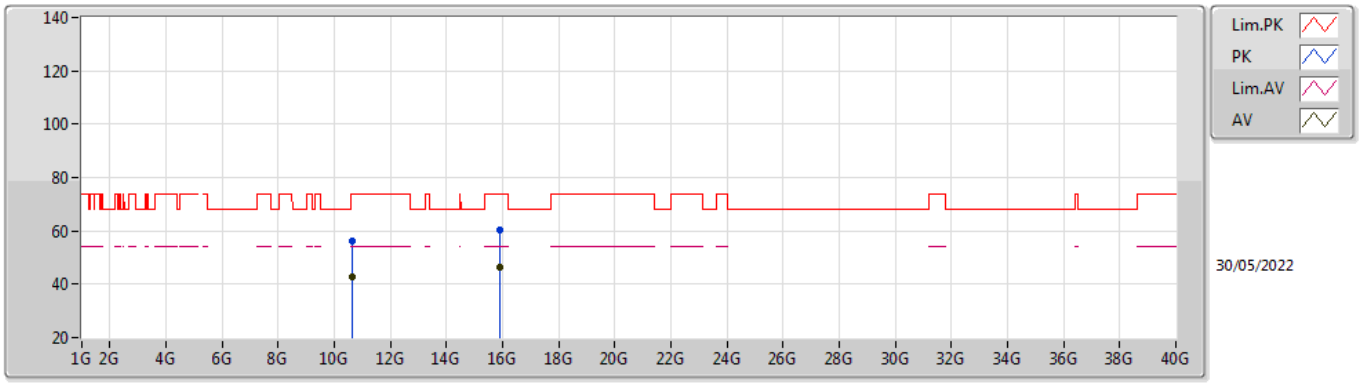


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.616G	56.15	74.00	-17.85	42.70	3	Horizontal	301	1.80	-	38.23	10.59	35.37
AV	10.6168G	42.91	54.00	-11.09	29.46	3	Horizontal	301	1.80	-	38.23	10.59	35.37
PK	15.9254G	60.44	74.00	-13.56	45.26	3	Horizontal	188	1.80	-	37.55	13.36	35.73
AV	15.9252G	46.59	54.00	-7.41	31.41	3	Horizontal	188	1.80	-	37.55	13.36	35.73

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

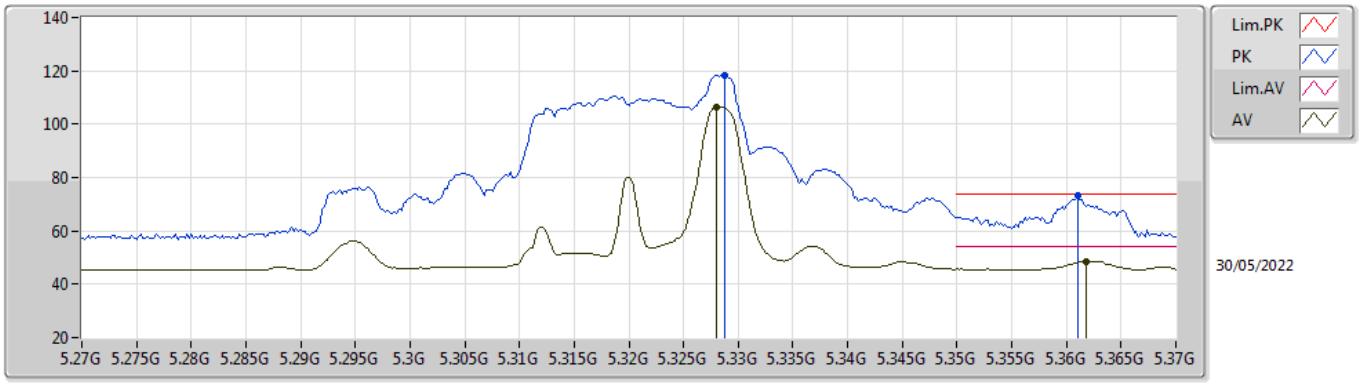


EUT Z_1TX
Setting 18.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3288G	118.24	Inf	-Inf	111.88	3	Vertical	165	1.76	-	34.50	7.20	35.34
AV	5.328G	106.46	Inf	-Inf	100.10	3	Vertical	165	1.76	-	34.50	7.20	35.34
PK	5.361G	73.27	74.00	-0.73	66.89	3	Vertical	165	1.76	-	34.52	7.20	35.34
AV	5.3618G	48.65	54.00	-5.35	42.27	3	Vertical	165	1.76	-	34.52	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

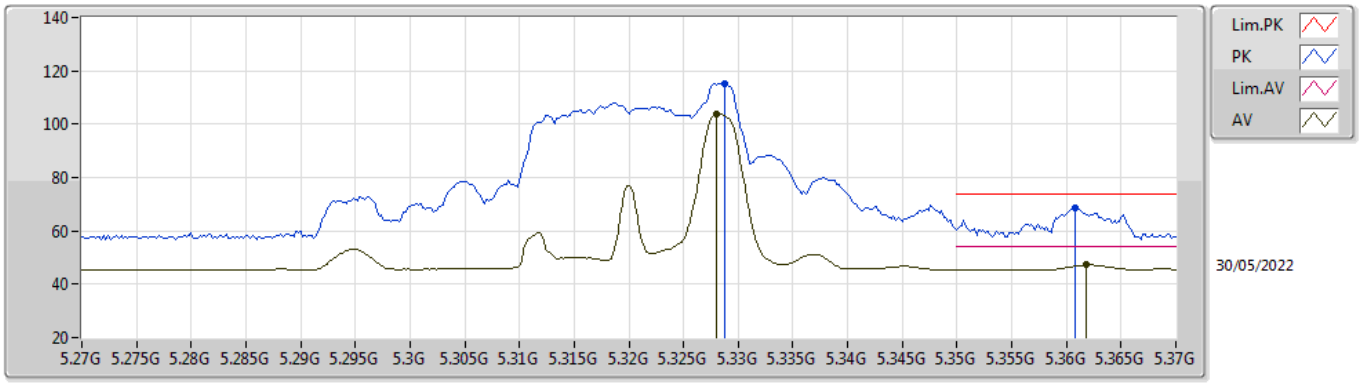


EUT Z_1TX
Setting 18.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3288G	115.33	Inf	-Inf	108.97	3	Horizontal	121	2.04	-	34.50	7.20	35.34
AV	5.328G	103.56	Inf	-Inf	97.20	3	Horizontal	121	2.04	-	34.50	7.20	35.34
PK	5.3608G	68.65	74.00	-5.35	62.27	3	Horizontal	121	2.04	-	34.52	7.20	35.34
AV	5.3618G	47.24	54.00	-6.76	40.86	3	Horizontal	121	2.04	-	34.52	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

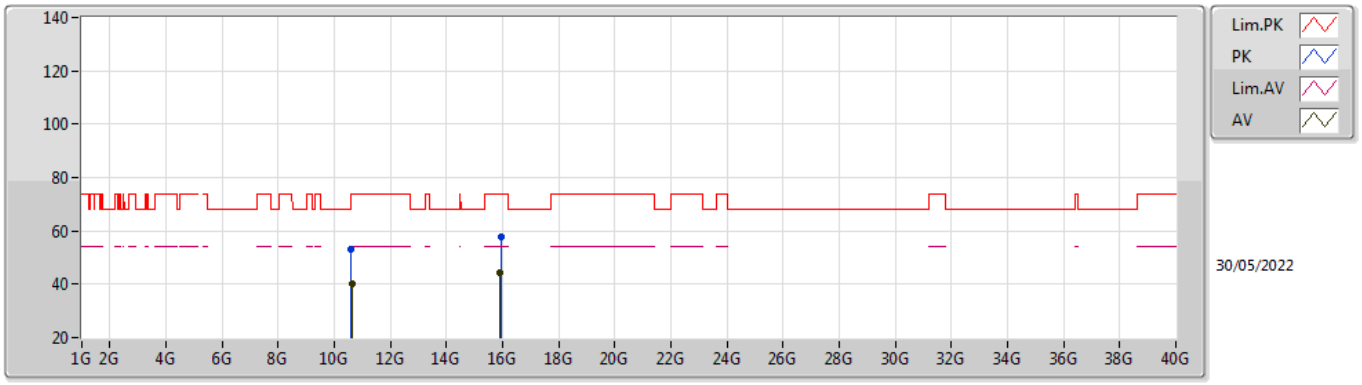


EUT X_1TX
Setting 18.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6132G	52.87	74.00	-21.13	39.42	3	Vertical	359	2.09	-	38.23	10.59	35.37
AV	10.6568G	40.16	54.00	-13.84	26.59	3	Vertical	359	2.09	-	38.31	10.60	35.34
PK	15.9668G	57.88	74.00	-16.12	42.79	3	Vertical	179	2.89	-	37.47	13.38	35.76
AV	15.9206G	44.35	54.00	-9.65	29.15	3	Vertical	179	2.89	-	37.56	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

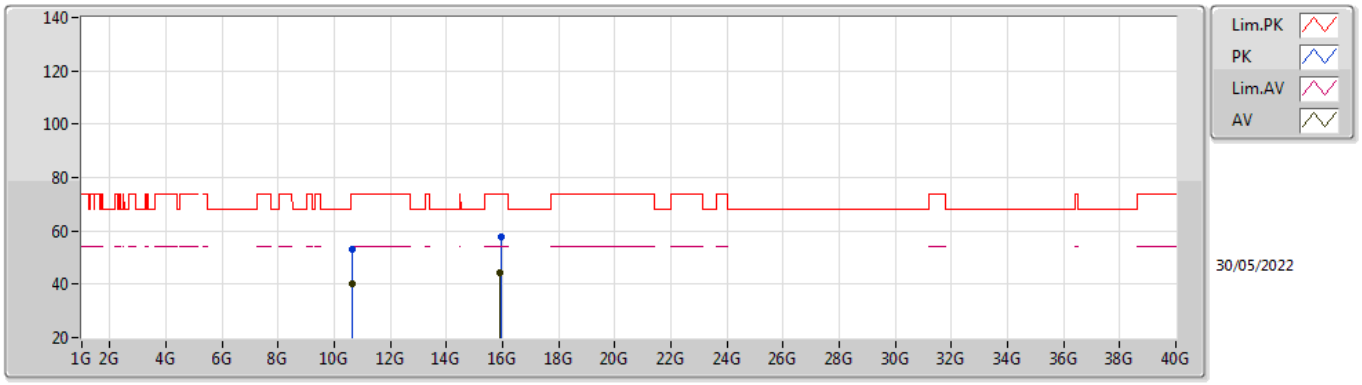


EUT X_1TX
Setting 18.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6562G	53.05	74.00	-20.95	39.48	3	Horizontal	49	1.81	-	38.31	10.60	35.34
AV	10.657G	40.15	54.00	-13.85	26.57	3	Horizontal	49	1.81	-	38.31	10.60	35.33
PK	15.9286G	57.52	74.00	-16.48	42.35	3	Horizontal	199	2.46	-	37.54	13.36	35.73
AV	15.9102G	44.33	54.00	-9.67	29.10	3	Horizontal	199	2.46	-	37.58	13.36	35.71

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

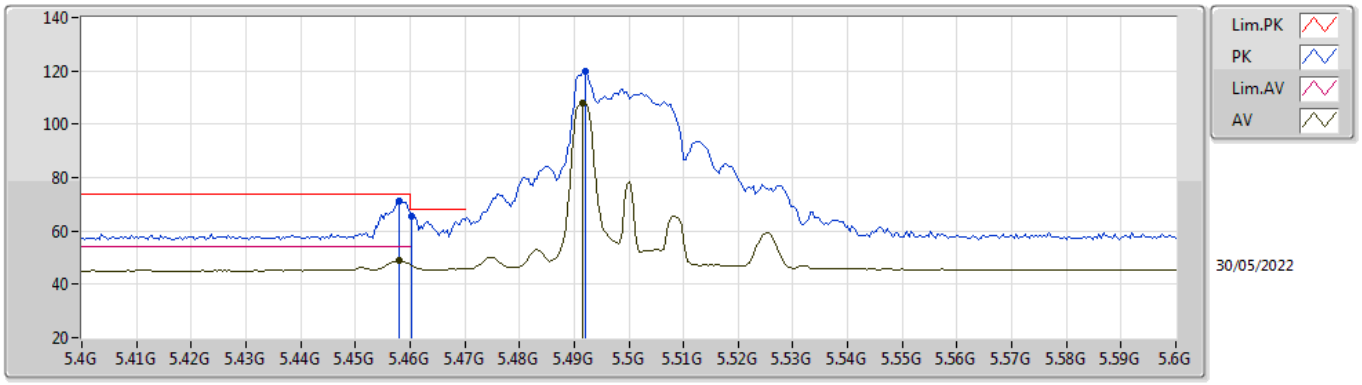


EUT Z_1TX
Setting 20.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.458G	71.02	74.00	-2.98	64.59	3	Vertical	82	1.80	-	34.52	7.26	35.35
AV	5.458G	48.92	54.00	-5.08	42.49	3	Vertical	82	1.80	-	34.52	7.26	35.35
PK	5.4604G	65.63	68.20	-2.57	59.20	3	Vertical	82	1.80	-	34.52	7.26	35.35
PK	5.492G	120.07	Inf	-Inf	113.55	3	Vertical	82	1.80	-	34.58	7.29	35.35
AV	5.4916G	107.78	Inf	-Inf	101.26	3	Vertical	82	1.80	-	34.58	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

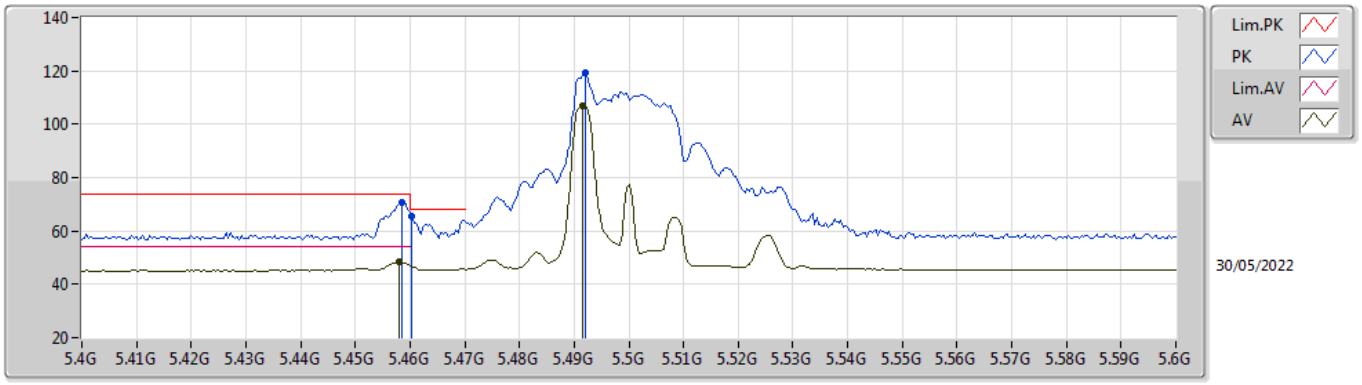


EUT Z_1TX
Setting 20.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4584G	70.82	74.00	-3.18	64.39	3	Horizontal	179	2.41	-	34.52	7.26	35.35
AV	5.458G	48.48	54.00	-5.52	42.05	3	Horizontal	179	2.41	-	34.52	7.26	35.35
PK	5.4604G	65.51	68.20	-2.69	59.08	3	Horizontal	179	2.41	-	34.52	7.26	35.35
PK	5.492G	119.08	Inf	-Inf	112.56	3	Horizontal	179	2.41	-	34.58	7.29	35.35
AV	5.4916G	106.79	Inf	-Inf	100.27	3	Horizontal	179	2.41	-	34.58	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

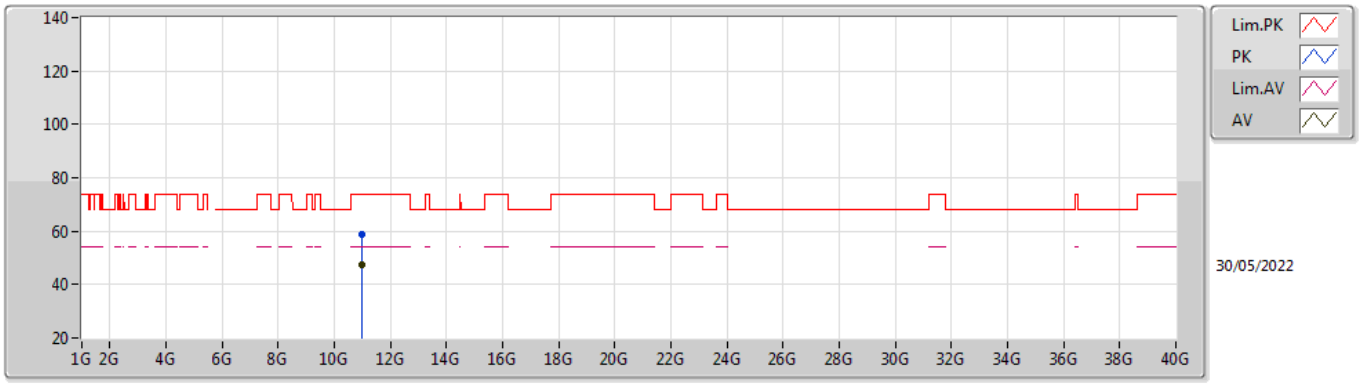


EUT X_1TX
Setting 20.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9838G	58.93	74.00	-15.07	44.95	3	Vertical	212	2.15	-	38.38	10.65	35.05
AV	10.9832G	47.20	54.00	-6.80	33.22	3	Vertical	212	2.15	-	38.38	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

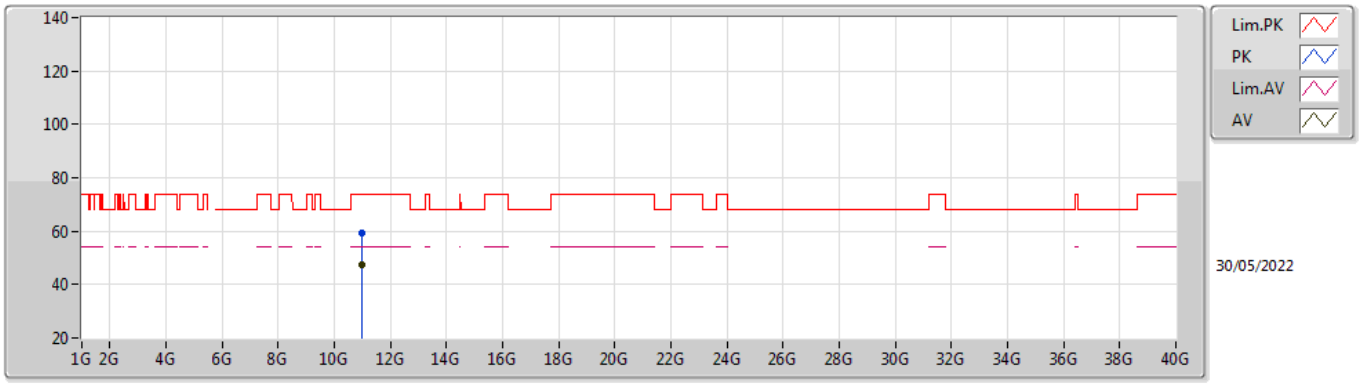


EUT X_1TX
Setting 20.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9838G	59.47	74.00	-14.53	45.49	3	Horizontal	354	1.69	-	38.38	10.65	35.05
AV	10.983G	47.40	54.00	-6.60	33.42	3	Horizontal	354	1.69	-	38.38	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

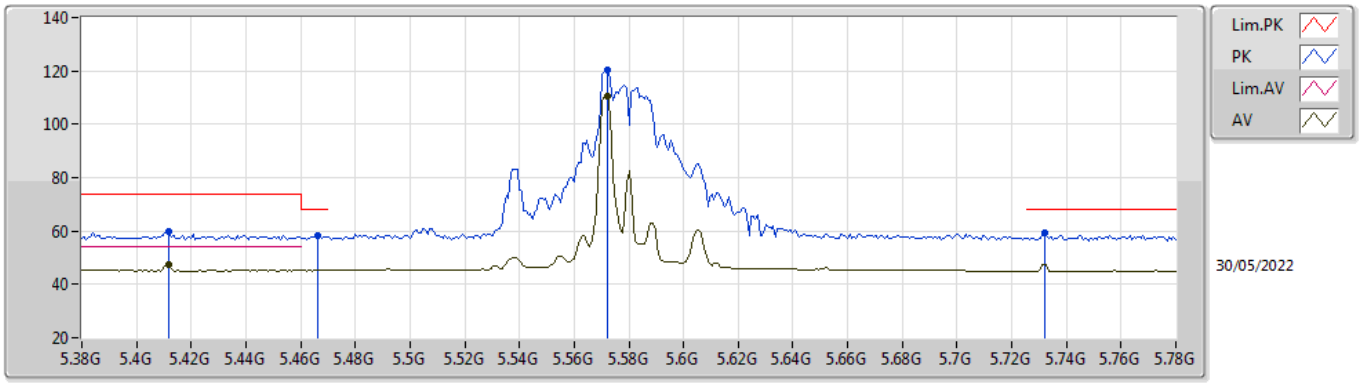


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.412G	59.77	74.00	-14.23	53.33	3	Vertical	83	1.76	-	34.58	7.21	35.35
AV	5.412G	47.34	54.00	-6.66	40.90	3	Vertical	83	1.76	-	34.58	7.21	35.35
PK	5.4664G	58.05	68.20	-10.15	51.60	3	Vertical	83	1.76	-	34.53	7.27	35.35
PK	5.572G	120.55	Inf	-Inf	113.97	3	Vertical	83	1.76	-	34.60	7.37	35.39
AV	5.572G	110.50	Inf	-Inf	103.92	3	Vertical	83	1.76	-	34.60	7.37	35.39
PK	5.732G	59.25	68.20	-8.95	53.08	3	Vertical	83	1.76	-	34.24	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

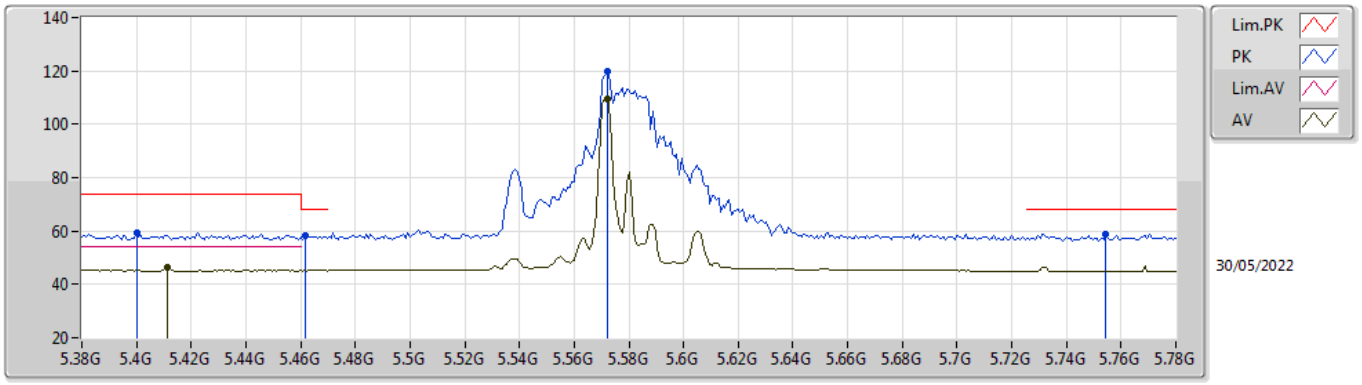


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4G	59.39	74.00	-14.61	52.94	3	Horizontal	178	2.30	-	34.60	7.20	35.35
AV	5.4112G	46.33	54.00	-7.67	39.89	3	Horizontal	178	2.30	-	34.58	7.21	35.35
PK	5.4616G	58.35	68.20	-9.85	51.92	3	Horizontal	178	2.30	-	34.52	7.26	35.35
PK	5.572G	119.72	Inf	-Inf	113.14	3	Horizontal	178	2.30	-	34.60	7.37	35.39
AV	5.572G	109.59	Inf	-Inf	103.01	3	Horizontal	178	2.30	-	34.60	7.37	35.39
PK	5.7544G	58.77	68.20	-9.43	52.65	3	Horizontal	178	2.30	-	34.20	7.40	35.48

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

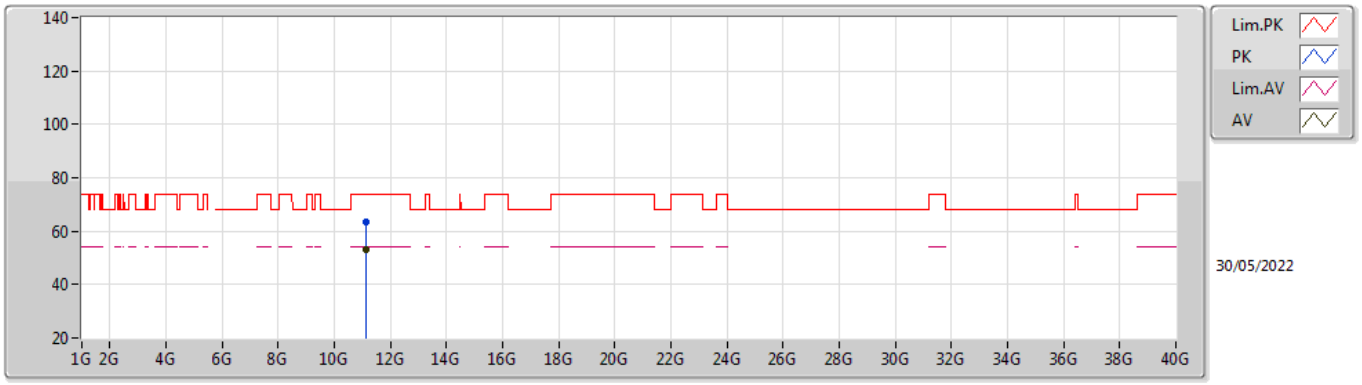


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1444G	63.34	74.00	-10.66	49.33	3	Vertical	166	3.00	-	38.54	10.67	35.20
AV	11.1432G	52.97	54.00	-1.03	38.96	3	Vertical	166	3.00	-	38.54	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

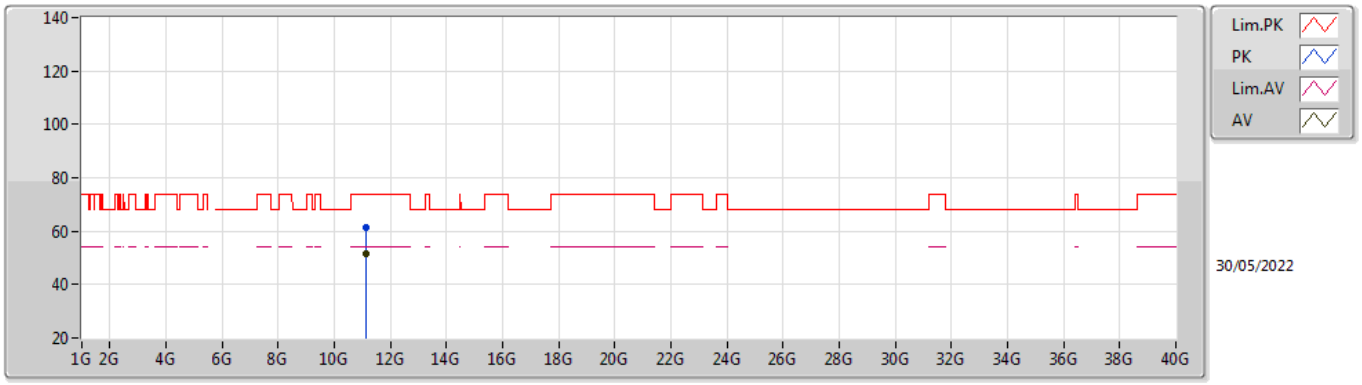


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.144G	61.51	74.00	-12.49	47.50	3	Horizontal	146	1.79	-	38.54	10.67	35.20
AV	11.1432G	51.36	54.00	-2.64	37.35	3	Horizontal	146	1.79	-	38.54	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

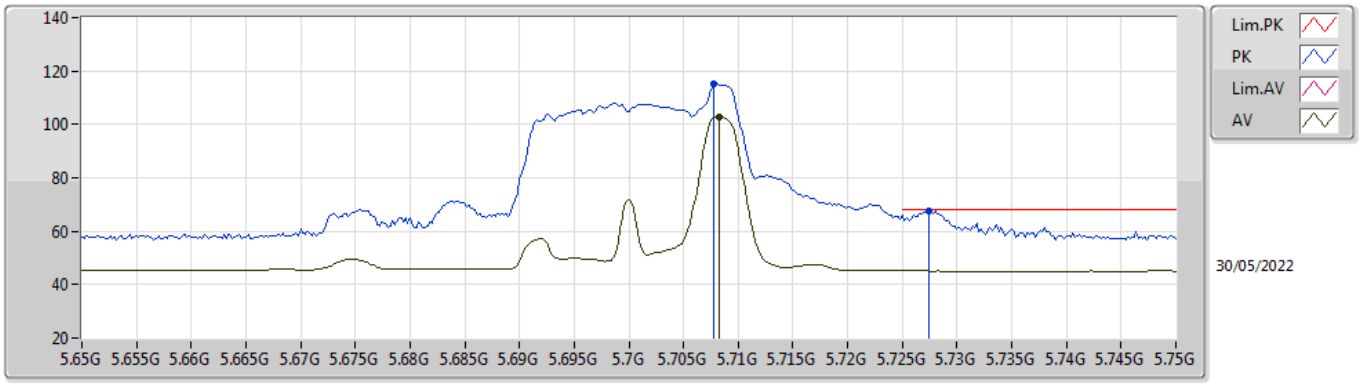


EUT Z_1TX
Setting 16.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7078G	115.31	Inf	-Inf	109.08	3	Vertical	137	1.00	-	34.28	7.40	35.45
AV	5.7082G	102.98	Inf	-Inf	96.75	3	Vertical	137	1.00	-	34.28	7.40	35.45
PK	5.7274G	67.49	68.20	-0.71	61.30	3	Vertical	137	1.00	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

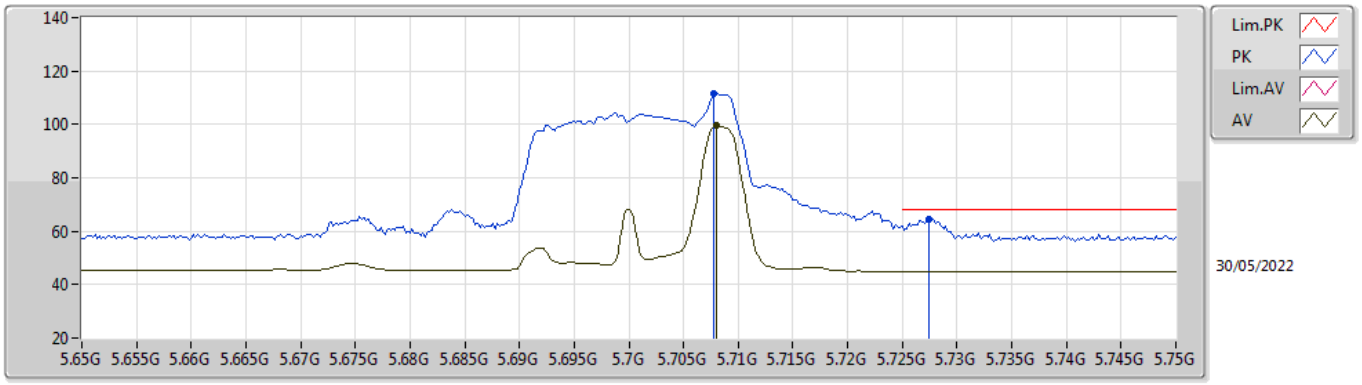


EUT Z_1TX
Setting 16.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7078G	111.59	Inf	-Inf	105.36	3	Horizontal	124	1.85	-	34.28	7.40	35.45
AV	5.708G	99.41	Inf	-Inf	93.18	3	Horizontal	124	1.85	-	34.28	7.40	35.45
PK	5.7274G	64.30	68.20	-3.90	58.11	3	Horizontal	124	1.85	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

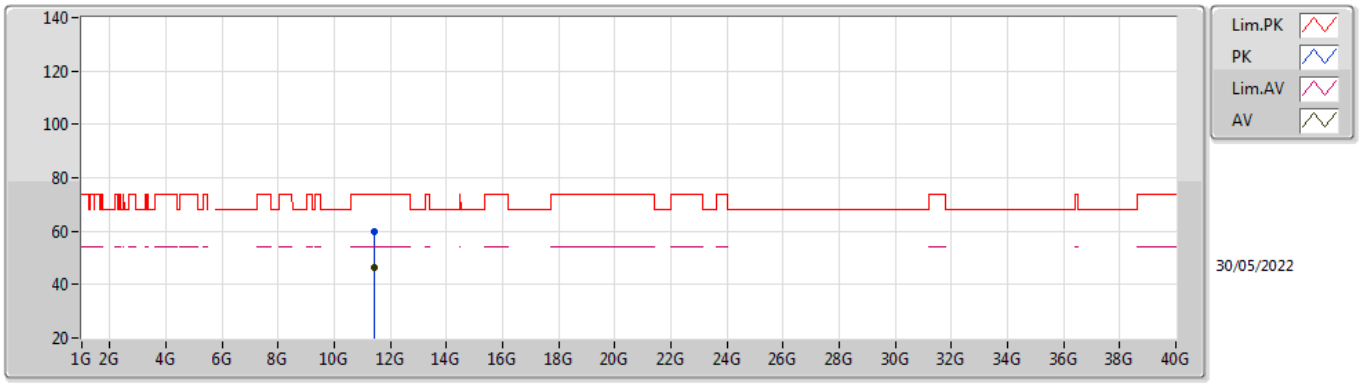


EUT X_1TX
Setting 16.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4158G	59.77	74.00	-14.23	45.74	3	Vertical	54	1.62	-	38.83	10.71	35.51
AV	11.417G	46.13	54.00	-7.87	32.10	3	Vertical	54	1.62	-	38.83	10.71	35.51

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

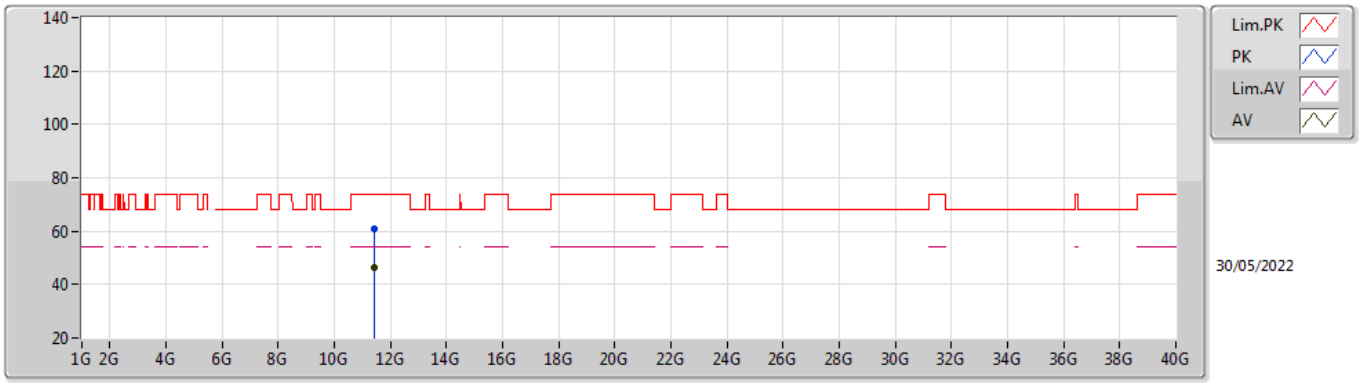


EUT X_1TX
Setting 16.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4178G	60.83	74.00	-13.17	46.79	3	Horizontal	29	1.47	-	38.84	10.71	35.51
AV	11.417G	46.16	54.00	-7.84	32.13	3	Horizontal	29	1.47	-	38.83	10.71	35.51

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

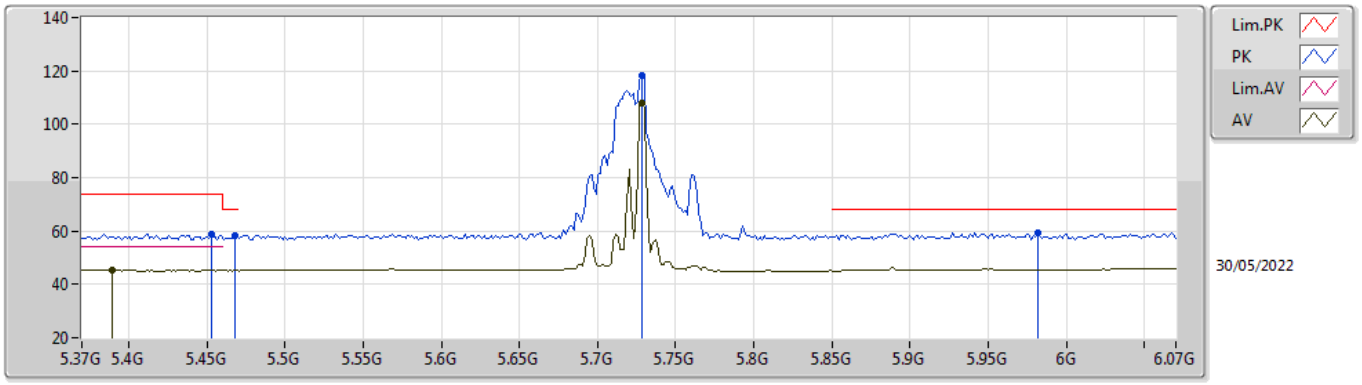


EUT Z_1TX
Setting 21.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4526G	58.84	74.00	-15.16	52.43	3	Vertical	132	1.80	-	34.51	7.25	35.35
AV	5.3896G	45.22	54.00	-8.78	38.79	3	Vertical	132	1.80	-	34.58	7.20	35.35
PK	5.468G	58.38	68.20	-9.82	51.92	3	Vertical	132	1.80	-	34.54	7.27	35.35
PK	5.7284G	118.51	Inf	-Inf	112.33	3	Vertical	132	1.80	-	34.24	7.40	35.46
AV	5.7284G	108.01	Inf	-Inf	101.83	3	Vertical	132	1.80	-	34.24	7.40	35.46
PK	5.9818G	59.24	68.20	-8.96	52.45	3	Vertical	132	1.80	-	34.80	7.58	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

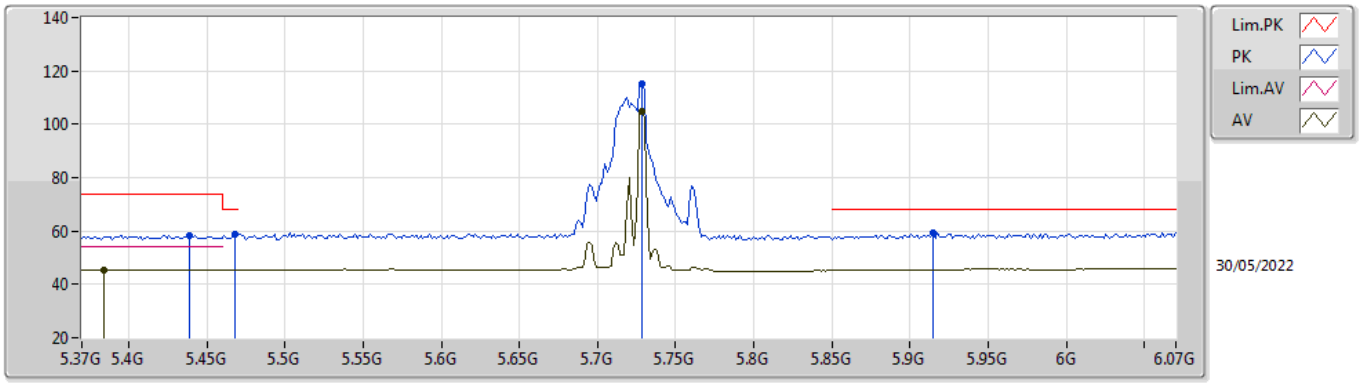


EUT Z_1TX
Setting 21.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4386G	58.23	74.00	-15.77	51.82	3	Horizontal	124	1.80	-	34.52	7.24	35.35
AV	5.384G	45.36	54.00	-8.64	38.94	3	Horizontal	124	1.80	-	34.57	7.20	35.35
PK	5.468G	58.55	68.20	-9.65	52.09	3	Horizontal	124	1.80	-	34.54	7.27	35.35
PK	5.7284G	115.33	Inf	-Inf	109.15	3	Horizontal	124	1.80	-	34.24	7.40	35.46
AV	5.7284G	104.70	Inf	-Inf	98.52	3	Horizontal	124	1.80	-	34.24	7.40	35.46
PK	5.9146G	59.52	68.20	-8.68	52.91	3	Horizontal	124	1.80	-	34.66	7.51	35.56

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

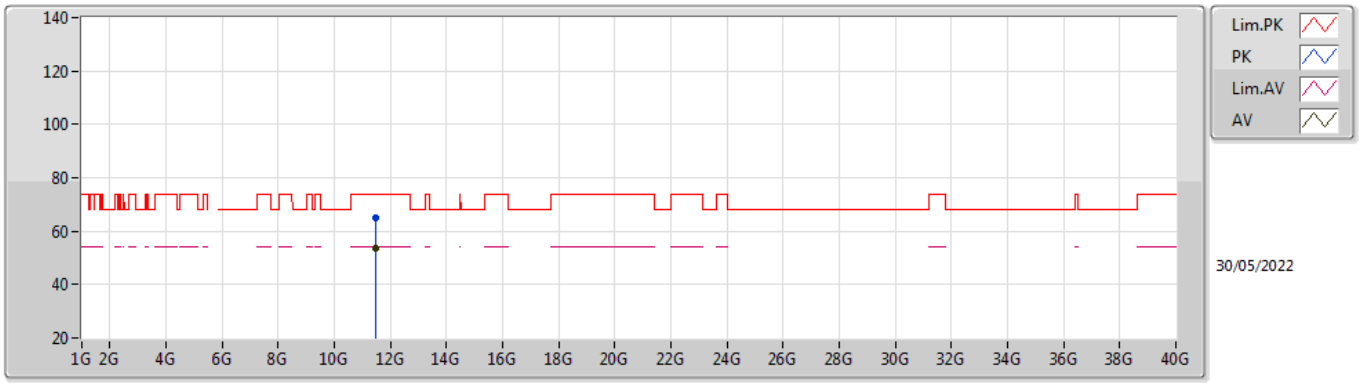


EUT X_1TX
Setting 21.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4574G	64.97	74.00	-9.03	50.89	3	Vertical	180	2.43	-	38.91	10.72	35.55
AV	11.4568G	53.79	54.00	-0.21	39.71	3	Vertical	180	2.43	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

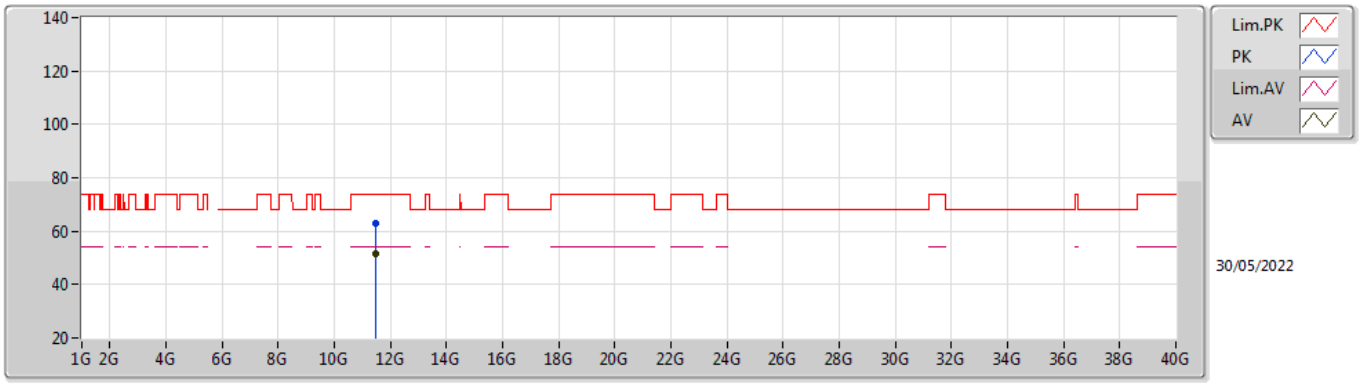


EUT X_1TX
Setting 21.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4568G	62.92	74.00	-11.08	48.84	3	Horizontal	139	2.05	-	38.91	10.72	35.55
AV	11.457G	51.39	54.00	-2.61	37.31	3	Horizontal	139	2.05	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

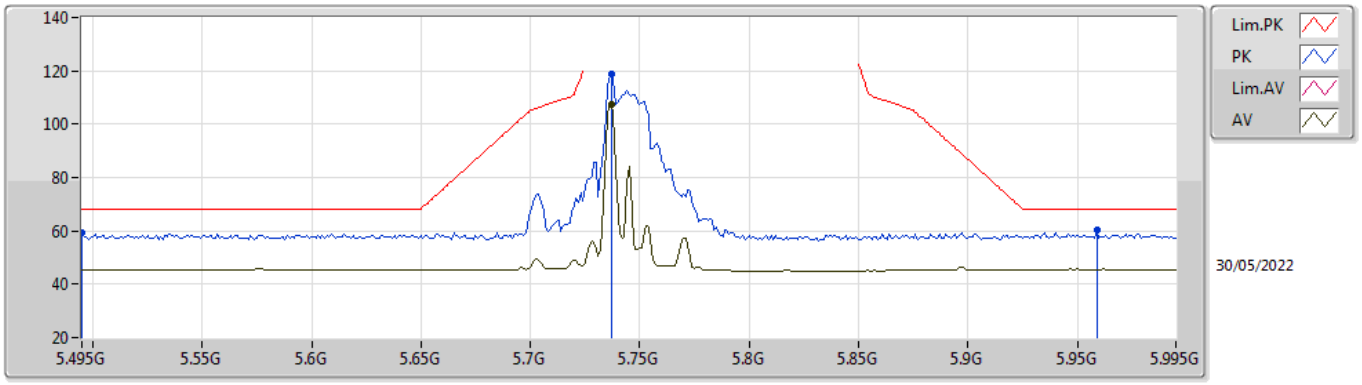


EUT Z_1TX
Setting 21
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.495G	59.09	68.20	-9.11	52.55	3	Vertical	133	1.86	-	34.59	7.30	35.35
PK	5.737G	118.83	Inf	-Inf	112.67	3	Vertical	133	1.86	-	34.23	7.40	35.47
AV	5.737G	107.19	Inf	-Inf	101.03	3	Vertical	133	1.86	-	34.23	7.40	35.47
PK	5.959G	60.17	68.20	-8.03	53.39	3	Vertical	133	1.86	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

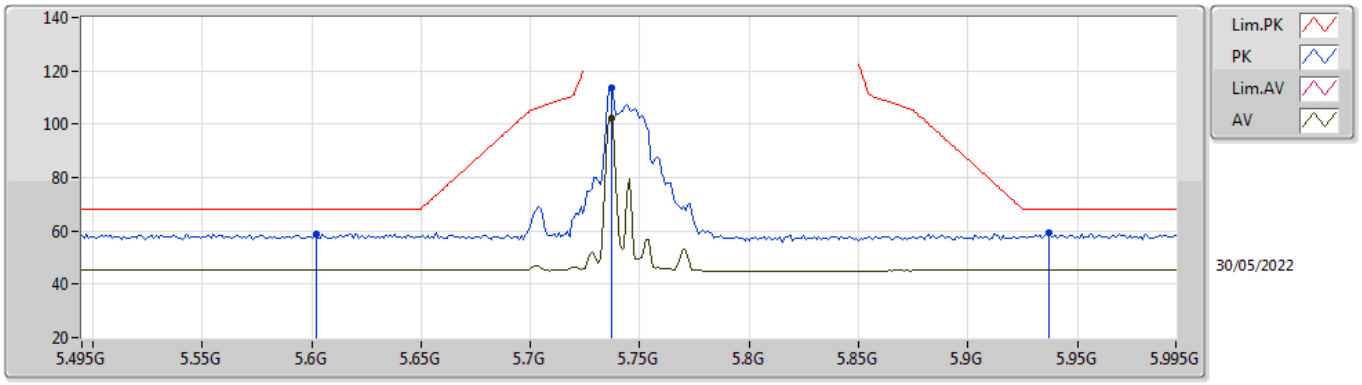


EUT Z_1TX
Setting 21
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.602G	59.03	68.20	-9.17	52.43	3	Horizontal	123	1.76	-	34.60	7.40	35.40
PK	5.737G	113.79	Inf	-Inf	107.63	3	Horizontal	123	1.76	-	34.23	7.40	35.47
AV	5.737G	102.06	Inf	-Inf	95.90	3	Horizontal	123	1.76	-	34.23	7.40	35.47
PK	5.937G	59.27	68.20	-8.93	52.55	3	Horizontal	123	1.76	-	34.75	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

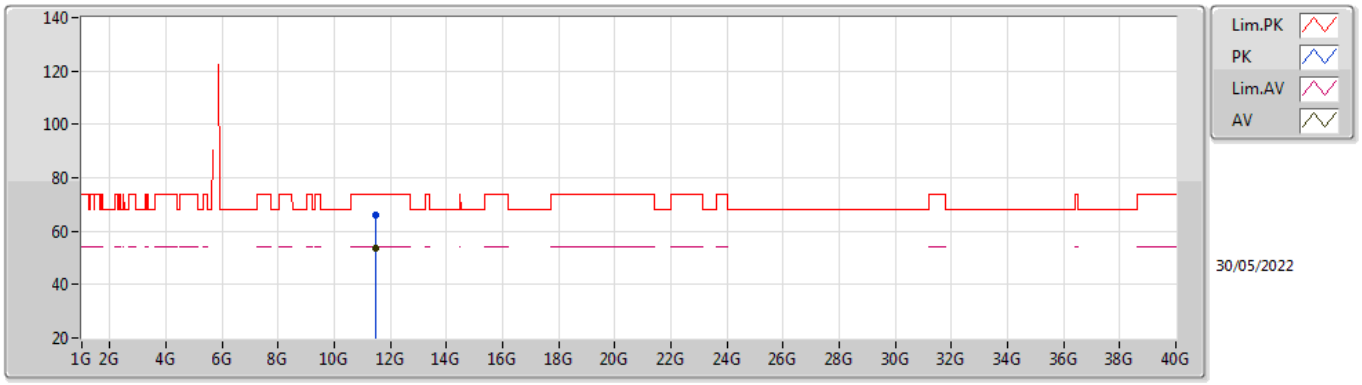


EUT X_1TX
Setting 21
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4736G	66.12	74.00	-7.88	52.02	3	Vertical	181	2.49	-	38.95	10.72	35.57
AV	11.473G	53.56	54.00	-0.44	39.46	3	Vertical	181	2.49	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

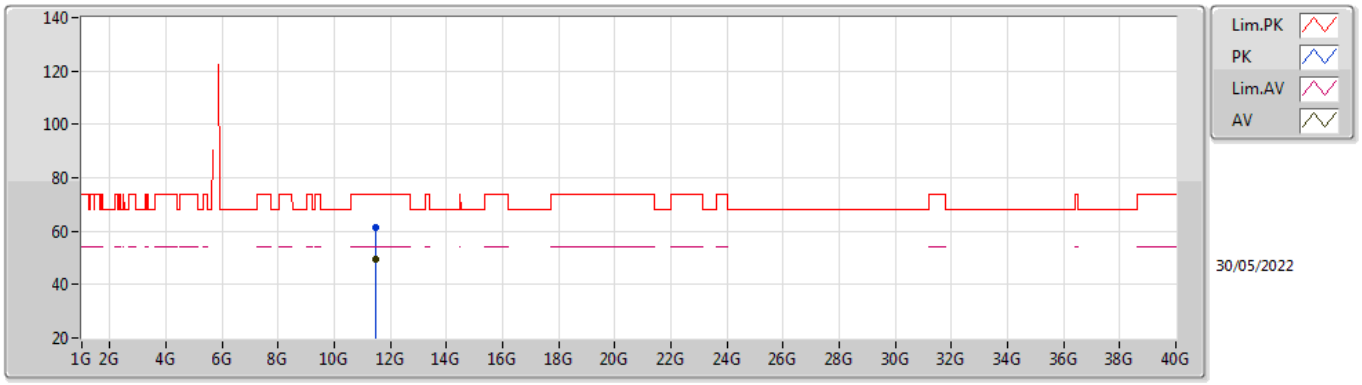


EUT X_1TX
Setting 21
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.474G	61.36	74.00	-12.64	47.26	3	Horizontal	148	1.80	-	38.95	10.72	35.57
AV	11.473G	49.61	54.00	-4.39	35.51	3	Horizontal	148	1.80	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

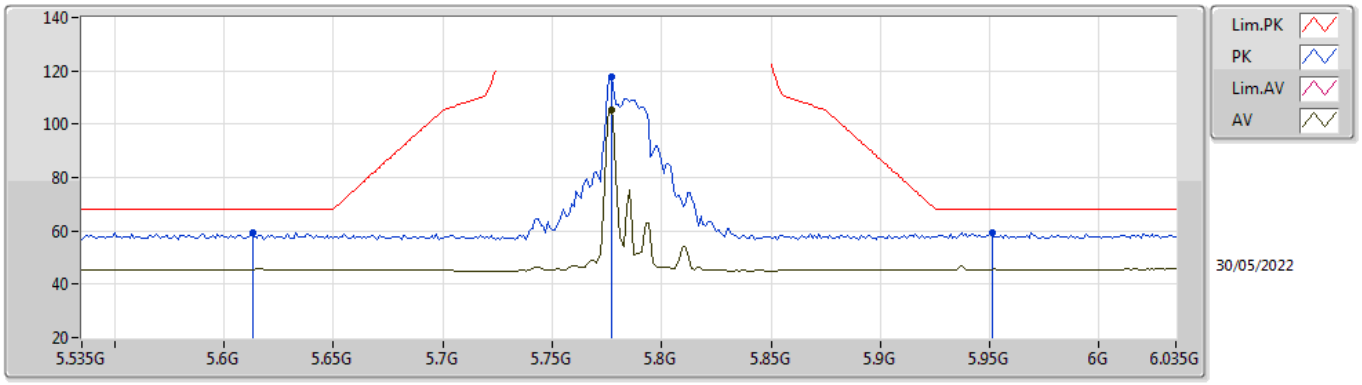


EUT Z_1TX
Setting 19.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.613G	59.22	68.20	-8.98	52.66	3	Vertical	134	1.83	-	34.57	7.40	35.41
PK	5.777G	117.56	Inf	-Inf	111.45	3	Vertical	134	1.83	-	34.20	7.40	35.49
AV	5.777G	105.17	Inf	-Inf	99.06	3	Vertical	134	1.83	-	34.20	7.40	35.49
PK	5.951G	59.49	68.20	-8.71	52.72	3	Vertical	134	1.83	-	34.80	7.55	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

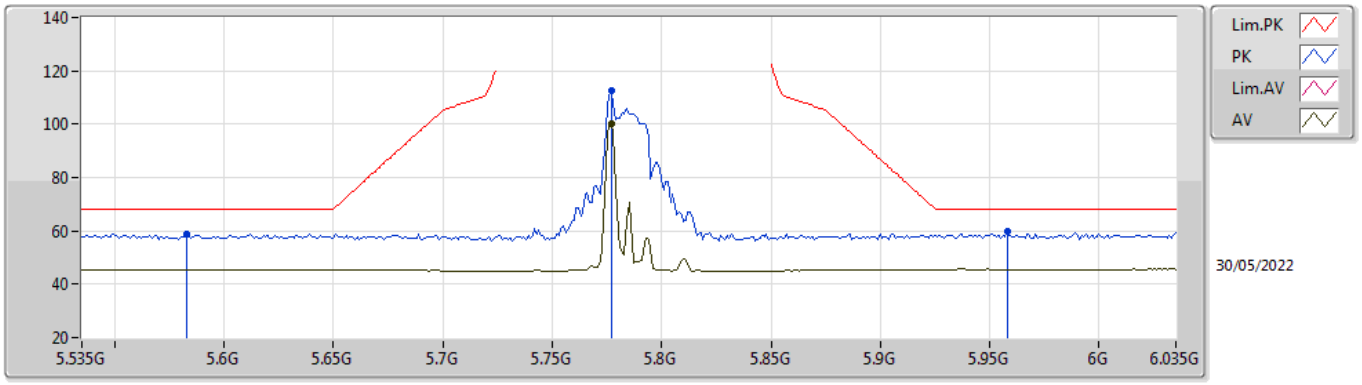


EUT Z_1TX
Setting 19.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.583G	59.04	68.20	-9.16	52.45	3	Horizontal	137	2.79	-	34.60	7.38	35.39
PK	5.777G	112.34	Inf	-Inf	106.23	3	Horizontal	137	2.79	-	34.20	7.40	35.49
AV	5.777G	99.95	Inf	-Inf	93.84	3	Horizontal	137	2.79	-	34.20	7.40	35.49
PK	5.958G	60.04	68.20	-8.16	53.26	3	Horizontal	137	2.79	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

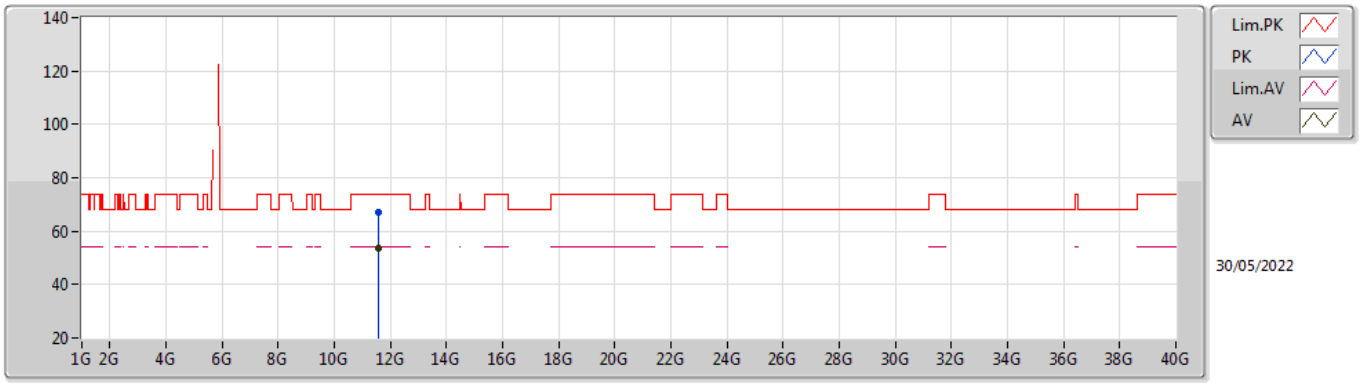


EUT X_1TX
Setting 19.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5538G	67.21	74.00	-6.79	52.85	3	Vertical	182	2.76	-	39.22	10.73	35.59
AV	11.5532G	53.50	54.00	-0.50	39.15	3	Vertical	182	2.76	-	39.21	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

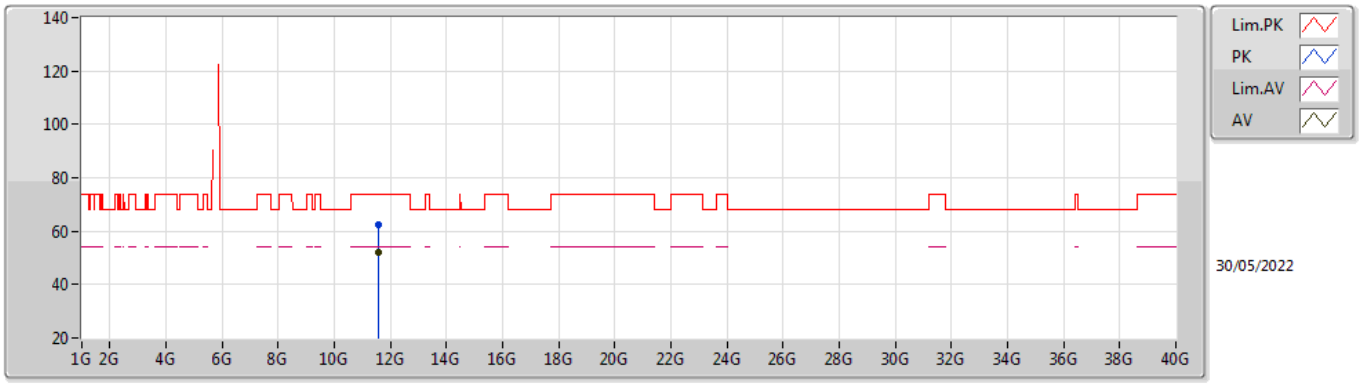


EUT X_1TX
Setting 19.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5532G	62.28	74.00	-11.72	47.93	3	Horizontal	132	2.10	-	39.21	10.73	35.59
AV	11.553G	51.82	54.00	-2.18	37.47	3	Horizontal	132	2.10	-	39.21	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

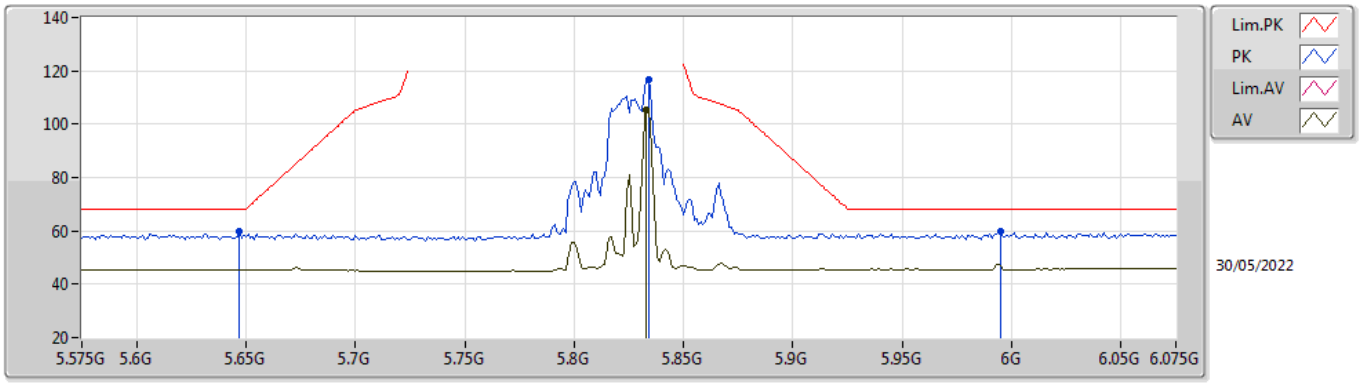


EUT Z_1TX
Setting 18.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.647G	59.64	68.20	-8.56	53.15	3	Vertical	133	1.96	-	34.51	7.40	35.42
PK	5.834G	116.79	Inf	-Inf	110.61	3	Vertical	133	1.96	-	34.27	7.43	35.52
AV	5.833G	105.24	Inf	-Inf	99.06	3	Vertical	133	1.96	-	34.27	7.43	35.52
PK	5.995G	59.58	68.20	-8.62	52.79	3	Vertical	133	1.96	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

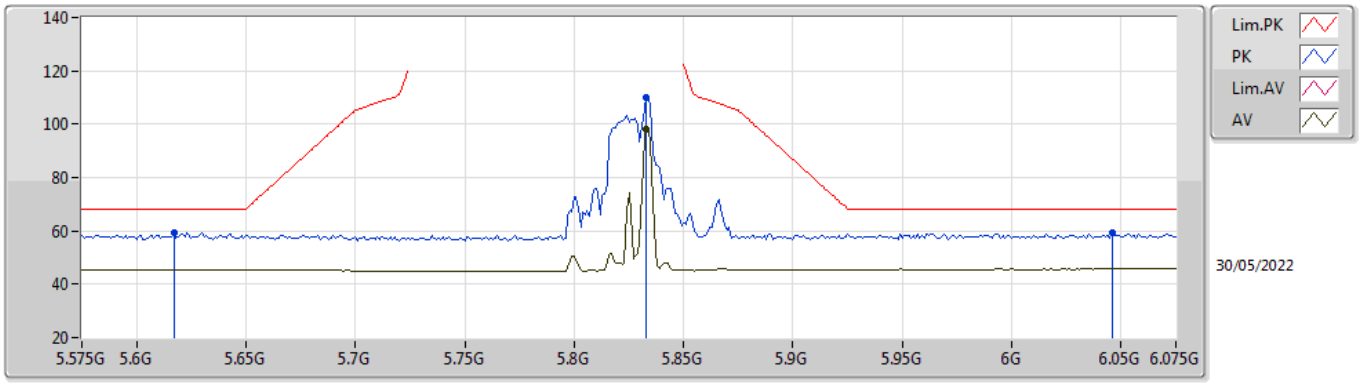


EUT Z_1TX
Setting 18.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.617G	59.22	68.20	-8.98	52.66	3	Horizontal	120	1.80	-	34.57	7.40	35.41
PK	5.833G	109.80	Inf	-Inf	103.62	3	Horizontal	120	1.80	-	34.27	7.43	35.52
AV	5.833G	98.13	Inf	-Inf	91.95	3	Horizontal	120	1.80	-	34.27	7.43	35.52
PK	6.046G	59.20	68.20	-9.00	52.27	3	Horizontal	120	1.80	-	34.89	7.62	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

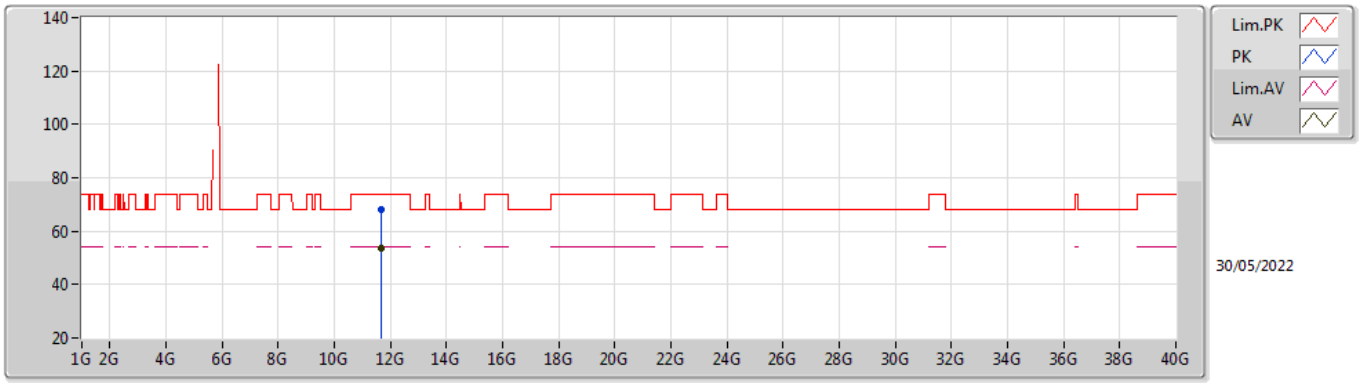


EUT X_1TX
Setting 18.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.666G	68.04	74.00	-5.96	53.45	3	Vertical	180	2.50	-	39.40	10.75	35.56
AV	11.6668G	53.70	54.00	-0.30	39.11	3	Vertical	180	2.50	-	39.40	10.75	35.56

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

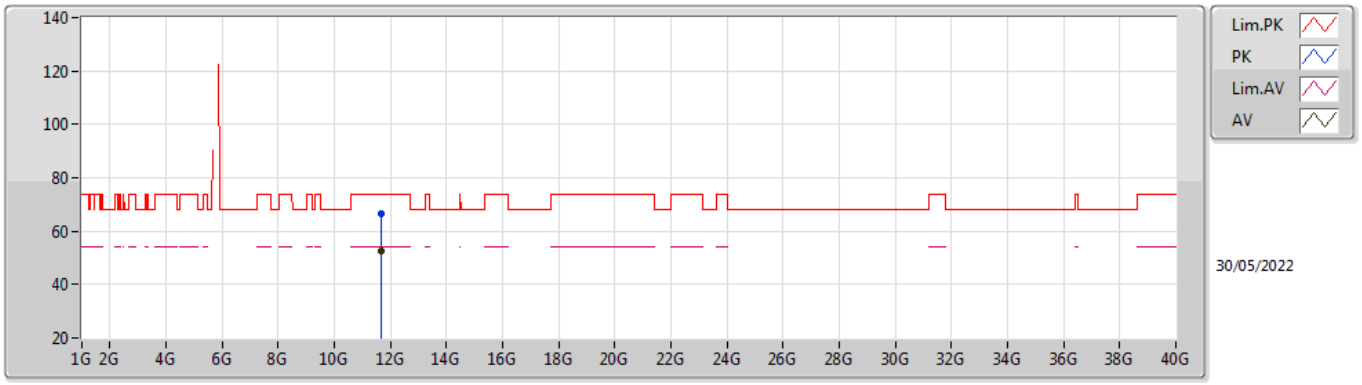

EUT X_1TX
Setting 18.5
03-B-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6668G	66.32	74.00	-7.68	51.73	3	Horizontal	206	2.07	-	39.40	10.75	35.56
AV	11.667G	52.56	54.00	-1.44	37.97	3	Horizontal	206	2.07	-	39.40	10.75	35.56

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	PK	5.356G	73.34	74.00	-0.66	3	Vertical	138	1.80	-

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

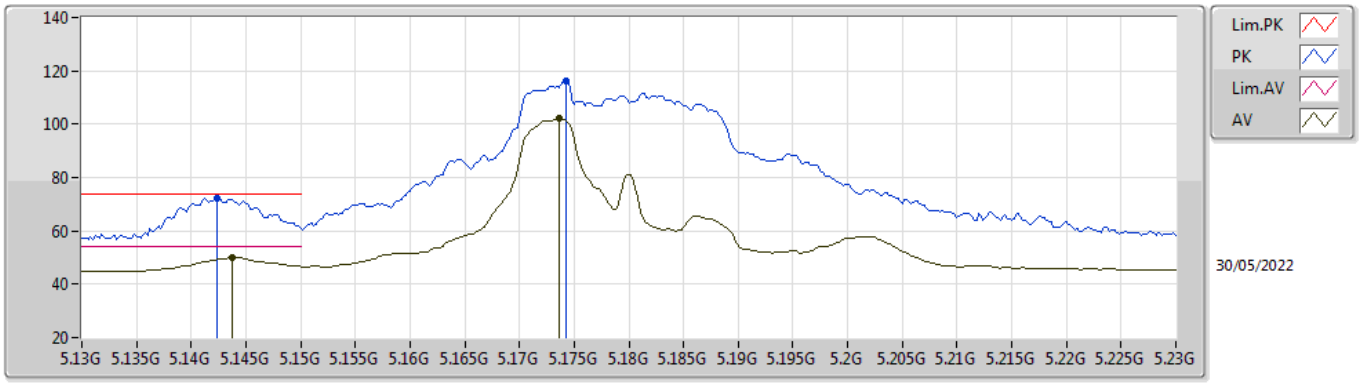


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1424G	72.47	74.00	-1.53	66.66	3	Vertical	138	1.79	-	33.98	7.17	35.34
AV	5.1438G	49.94	54.00	-4.06	44.12	3	Vertical	138	1.79	-	33.99	7.17	35.34
PK	5.1742G	116.31	Inf	-Inf	110.36	3	Vertical	138	1.79	-	34.10	7.19	35.34
AV	5.1736G	102.36	Inf	-Inf	96.42	3	Vertical	138	1.79	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

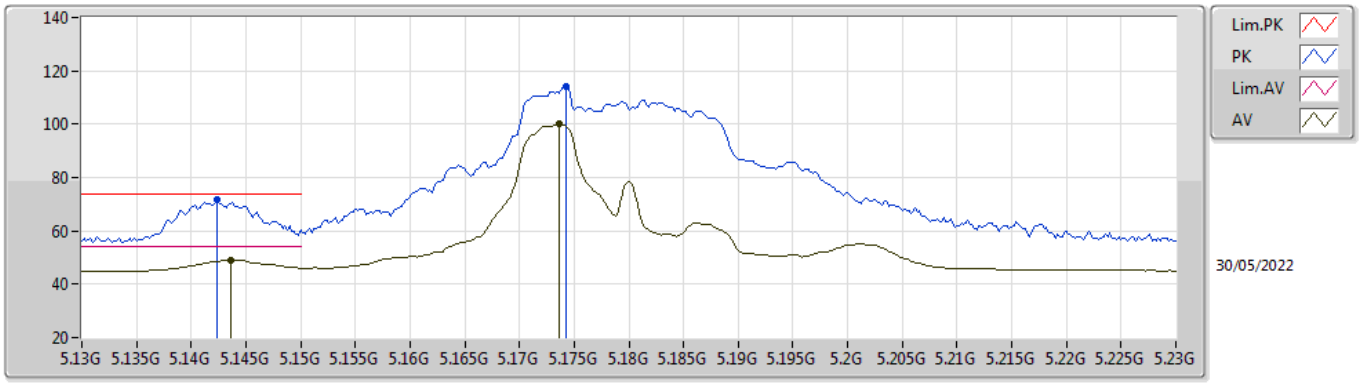


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1424G	71.77	74.00	-2.23	65.96	3	Horizontal	180	1.99	-	33.98	7.17	35.34
AV	5.1436G	49.12	54.00	-4.88	43.30	3	Horizontal	180	1.99	-	33.99	7.17	35.34
PK	5.1742G	114.16	Inf	-Inf	108.21	3	Horizontal	180	1.99	-	34.10	7.19	35.34
AV	5.1736G	100.30	Inf	-Inf	94.36	3	Horizontal	180	1.99	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

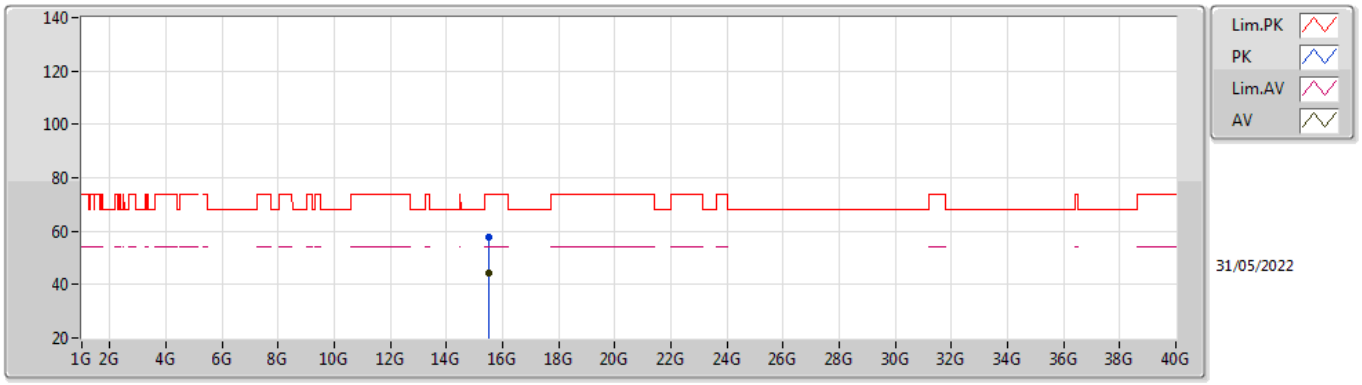


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.52956G	57.96	74.00	-16.04	41.70	3	Vertical	56	2.82	-	38.49	13.16	35.39
AV	15.52536G	44.49	54.00	-9.51	28.20	3	Vertical	56	2.82	-	38.52	13.16	35.39

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

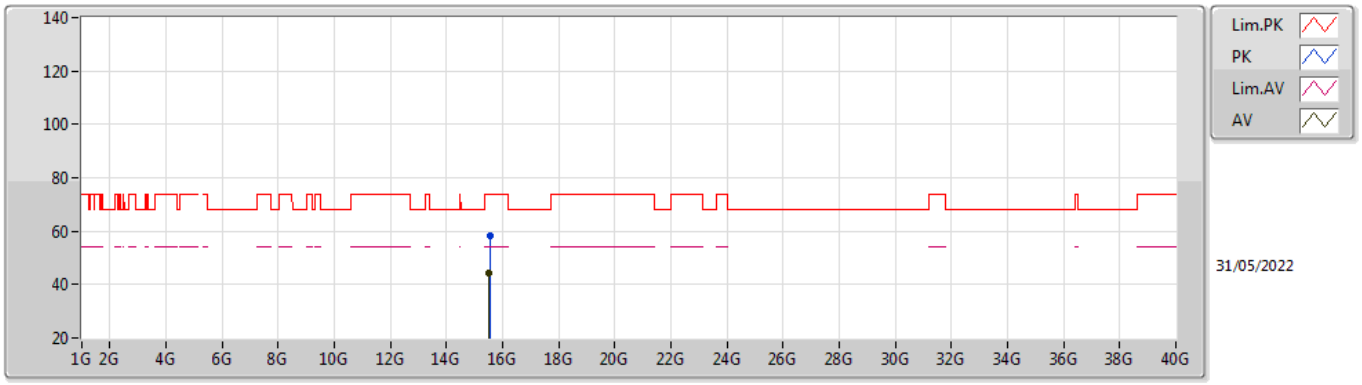


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.53748G	58.51	74.00	-15.49	42.30	3	Horizontal	280	2.40	-	38.44	13.17	35.40
AV	15.5274G	44.40	54.00	-9.60	28.12	3	Horizontal	280	2.40	-	38.51	13.16	35.39

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

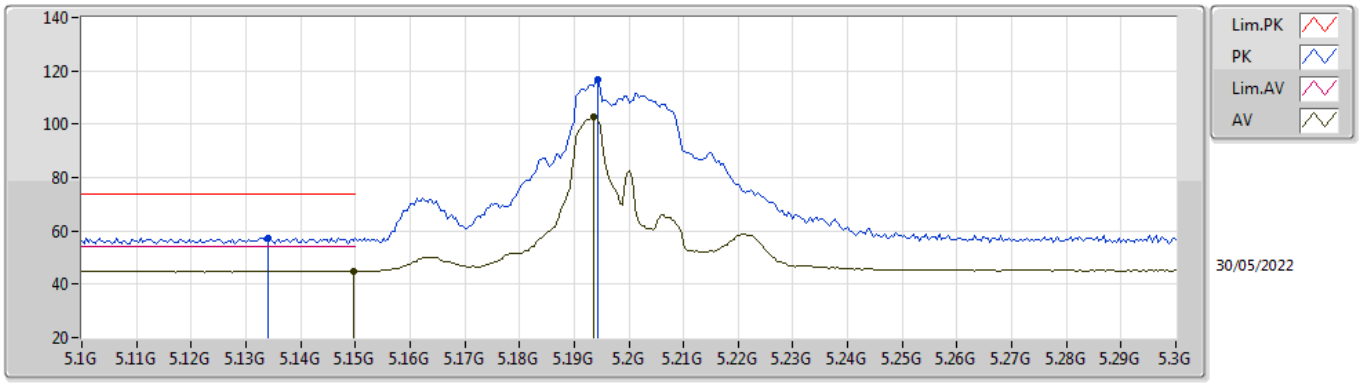


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.134G	57.30	74.00	-16.70	51.50	3	Vertical	138	1.79	-	33.97	7.17	35.34
AV	5.1496G	44.90	54.00	-9.10	39.07	3	Vertical	138	1.79	-	34.00	7.17	35.34
PK	5.1944G	116.73	Inf	-Inf	110.69	3	Vertical	138	1.79	-	34.18	7.20	35.34
AV	5.1936G	102.92	Inf	-Inf	96.89	3	Vertical	138	1.79	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

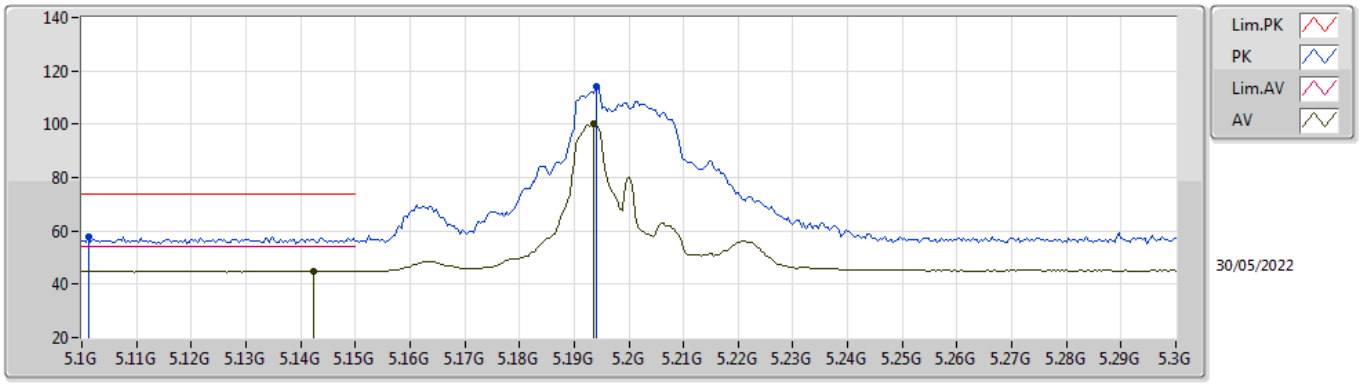


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1012G	57.93	74.00	-16.07	52.21	3	Horizontal	122	1.78	-	33.90	7.15	35.33
AV	5.1424G	44.83	54.00	-9.17	39.02	3	Horizontal	122	1.78	-	33.98	7.17	35.34
PK	5.194G	114.14	Inf	-Inf	108.10	3	Horizontal	122	1.78	-	34.18	7.20	35.34
AV	5.1936G	100.31	Inf	-Inf	94.28	3	Horizontal	122	1.78	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

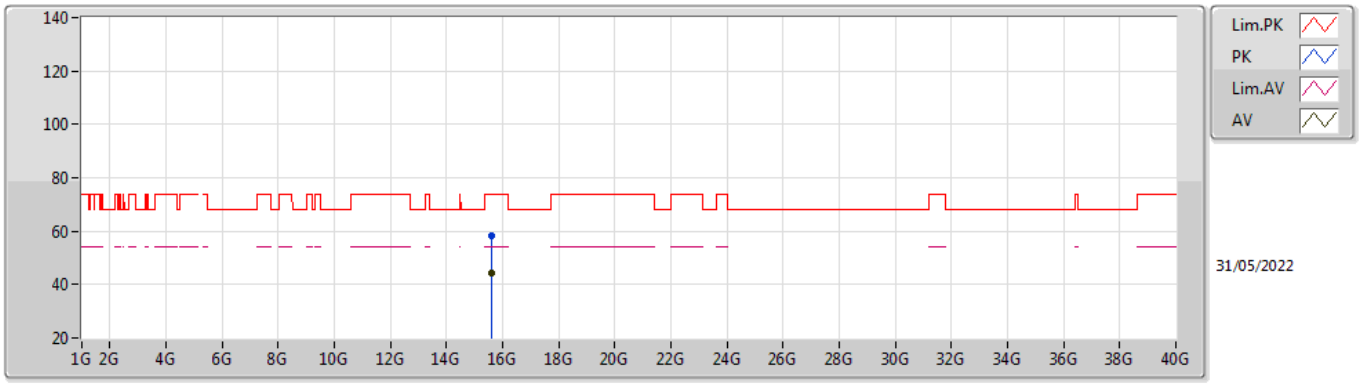


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.59688G	58.15	74.00	-15.85	42.38	3	Vertical	231	1.06	-	38.02	13.20	35.45
AV	15.59064G	44.34	54.00	-9.66	28.52	3	Vertical	231	1.06	-	38.07	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

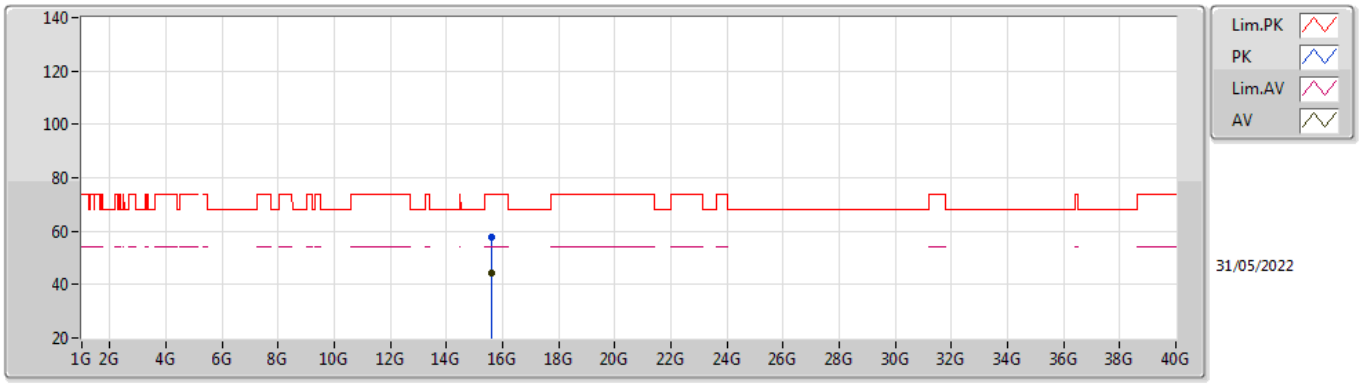


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.60198G	57.82	74.00	-16.18	42.09	3	Horizontal	221	2.89	-	37.99	13.20	35.46
AV	15.59064G	44.27	54.00	-9.73	28.45	3	Horizontal	221	2.89	-	38.07	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

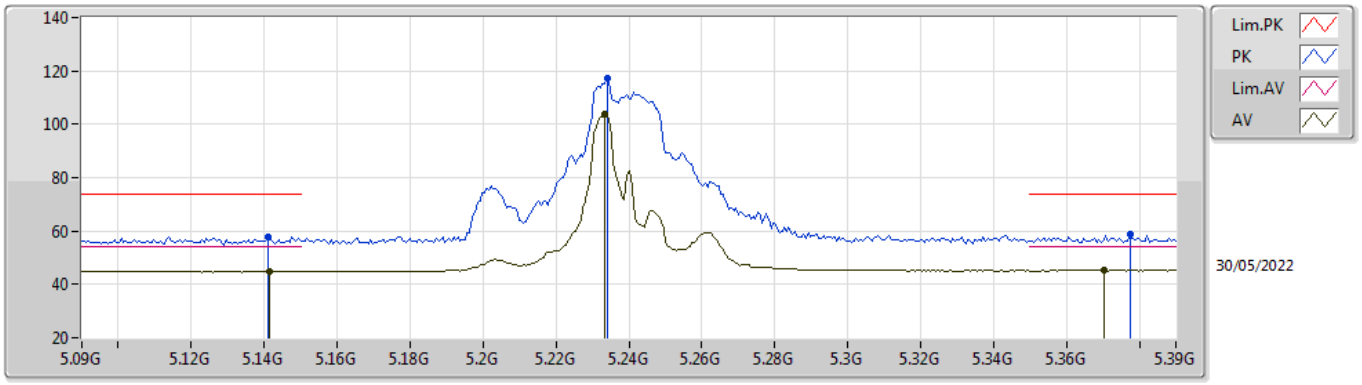


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.141G	57.65	74.00	-16.35	51.84	3	Vertical	139	1.75	-	33.98	7.17	35.34
AV	5.1416G	44.81	54.00	-9.19	39.00	3	Vertical	139	1.75	-	33.98	7.17	35.34
PK	5.234G	117.32	Inf	-Inf	111.12	3	Vertical	139	1.75	-	34.34	7.20	35.34
AV	5.2334G	103.54	Inf	-Inf	97.35	3	Vertical	139	1.75	-	34.33	7.20	35.34
PK	5.3774G	58.75	74.00	-15.25	52.35	3	Vertical	139	1.75	-	34.55	7.20	35.35
AV	5.3702G	45.29	54.00	-8.71	38.89	3	Vertical	139	1.75	-	34.54	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

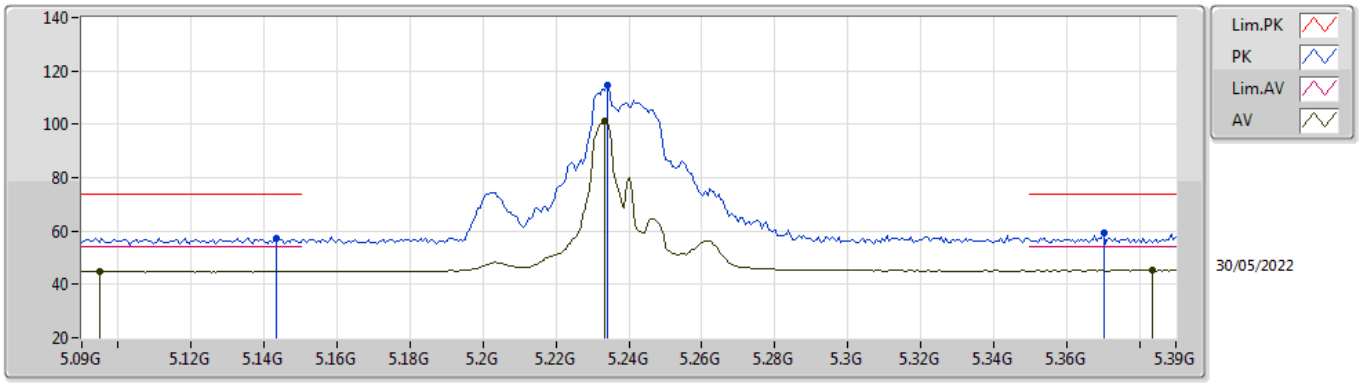


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1434G	57.42	74.00	-16.58	51.60	3	Horizontal	121	1.79	-	33.99	7.17	35.34
AV	5.0948G	44.79	54.00	-9.21	39.08	3	Horizontal	121	1.79	-	33.89	7.15	35.33
PK	5.234G	114.75	Inf	-Inf	108.55	3	Horizontal	121	1.79	-	34.34	7.20	35.34
AV	5.2334G	101.01	Inf	-Inf	94.82	3	Horizontal	121	1.79	-	34.33	7.20	35.34
PK	5.3702G	59.50	74.00	-14.50	53.10	3	Horizontal	121	1.79	-	34.54	7.20	35.34
AV	5.3834G	45.25	54.00	-8.75	38.83	3	Horizontal	121	1.79	-	34.57	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

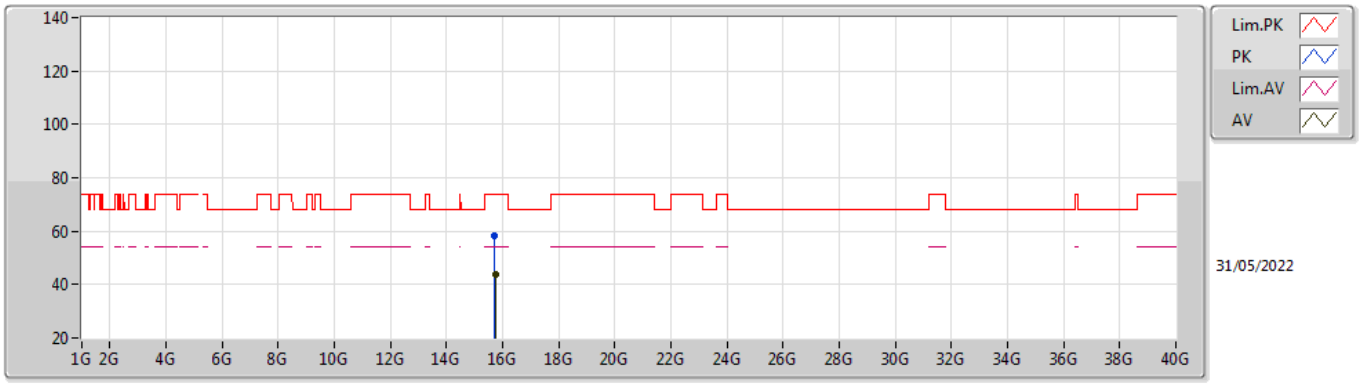


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.71154G	58.50	74.00	-15.50	43.24	3	Vertical	180	1.82	-	37.55	13.26	35.55
AV	15.73062G	43.86	54.00	-10.14	28.53	3	Vertical	180	1.82	-	37.62	13.27	35.56

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

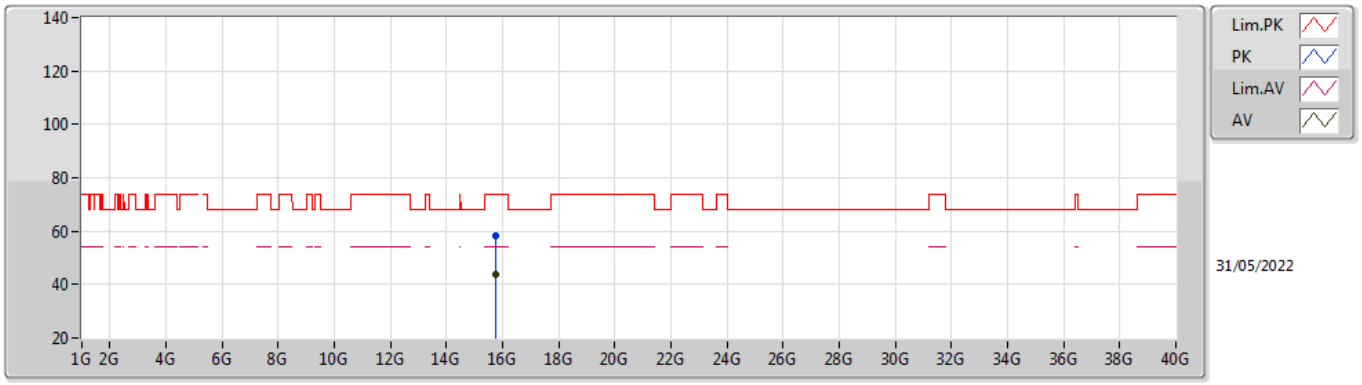


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.73158G	58.35	74.00	-15.65	43.01	3	Horizontal	279	2.03	-	37.63	13.27	35.56
AV	15.73254G	43.85	54.00	-10.15	28.52	3	Horizontal	279	2.03	-	37.63	13.27	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

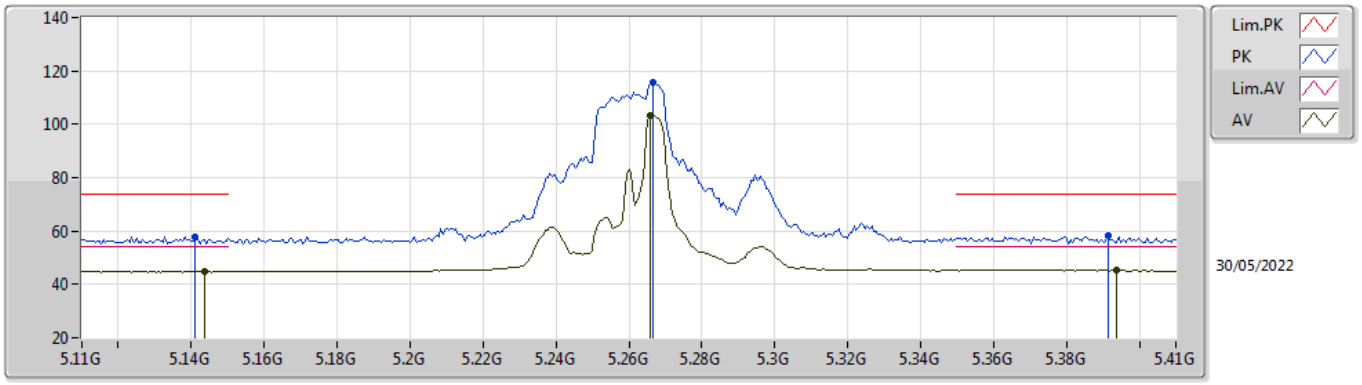


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1412G	57.81	74.00	-16.19	52.00	3	Vertical	138	1.94	-	33.98	7.17	35.34
AV	5.1436G	44.73	54.00	-9.27	38.91	3	Vertical	138	1.94	-	33.99	7.17	35.34
PK	5.2666G	115.72	Inf	-Inf	109.43	3	Vertical	138	1.94	-	34.43	7.20	35.34
AV	5.266G	103.47	Inf	-Inf	97.18	3	Vertical	138	1.94	-	34.43	7.20	35.34
PK	5.3914G	58.18	74.00	-15.82	51.75	3	Vertical	138	1.94	-	34.58	7.20	35.35
AV	5.3938G	45.29	54.00	-8.71	38.85	3	Vertical	138	1.94	-	34.59	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

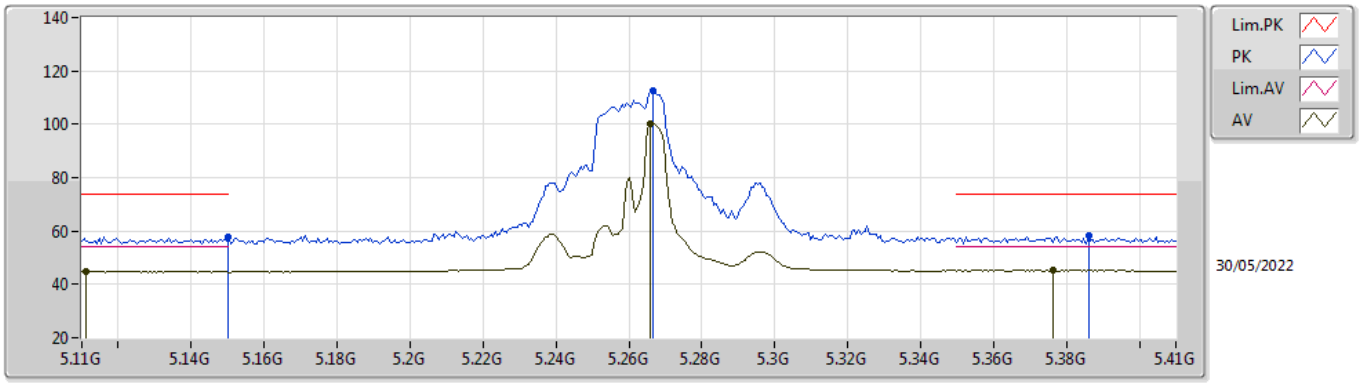


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	57.68	74.00	-16.32	51.85	3	Horizontal	122	1.90	-	34.00	7.17	35.34
AV	5.1112G	44.72	54.00	-9.28	38.97	3	Horizontal	122	1.90	-	33.92	7.16	35.33
PK	5.2666G	112.51	Inf	-Inf	106.22	3	Horizontal	122	1.90	-	34.43	7.20	35.34
AV	5.266G	100.35	Inf	-Inf	94.06	3	Horizontal	122	1.90	-	34.43	7.20	35.34
PK	5.386G	58.28	74.00	-15.72	51.86	3	Horizontal	122	1.90	-	34.57	7.20	35.35
AV	5.3764G	45.27	54.00	-8.73	38.87	3	Horizontal	122	1.90	-	34.55	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

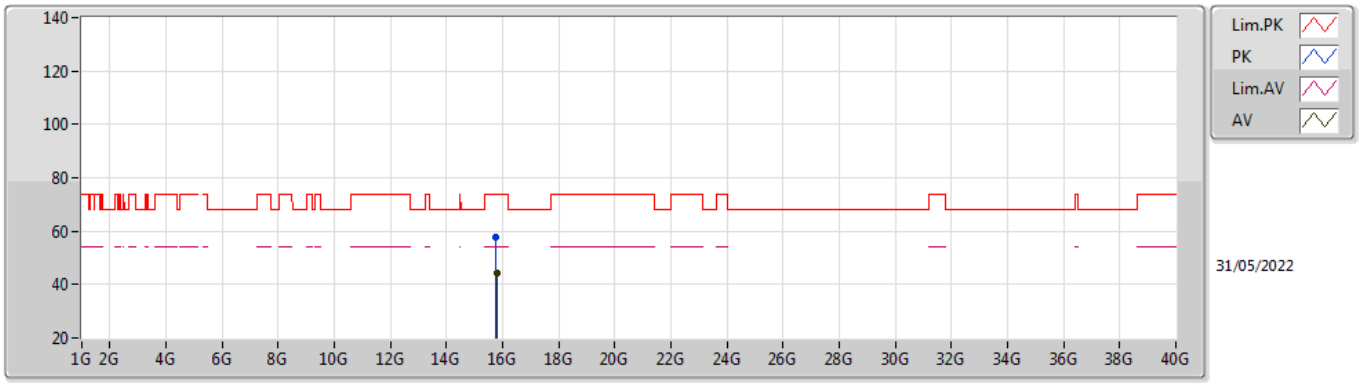


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.76704G	58.01	74.00	-15.99	42.55	3	Vertical	14	2.24	-	37.77	13.28	35.59
AV	15.79122G	44.50	54.00	-9.50	28.95	3	Vertical	14	2.24	-	37.86	13.30	35.61

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

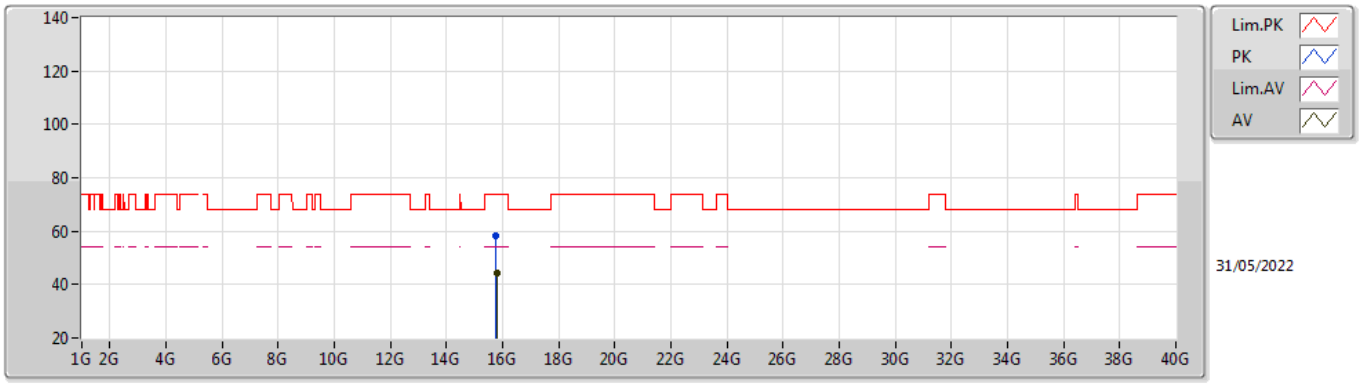


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.76734G	58.20	74.00	-15.80	42.74	3	Horizontal	175	2.79	-	37.77	13.28	35.59
AV	15.79092G	44.51	54.00	-9.49	28.96	3	Horizontal	175	2.79	-	37.86	13.30	35.61

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

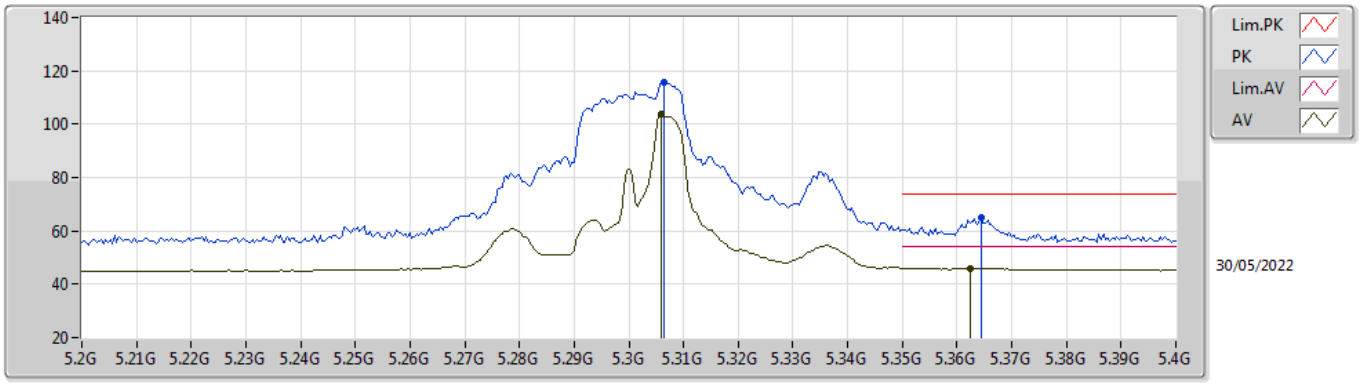


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3064G	115.89	Inf	-Inf	109.53	3	Vertical	139	1.80	-	34.50	7.20	35.34
AV	5.306G	103.68	Inf	-Inf	97.32	3	Vertical	139	1.80	-	34.50	7.20	35.34
PK	5.3644G	64.88	74.00	-9.12	58.49	3	Vertical	139	1.80	-	34.53	7.20	35.34
AV	5.3624G	45.98	54.00	-8.02	39.60	3	Vertical	139	1.80	-	34.52	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

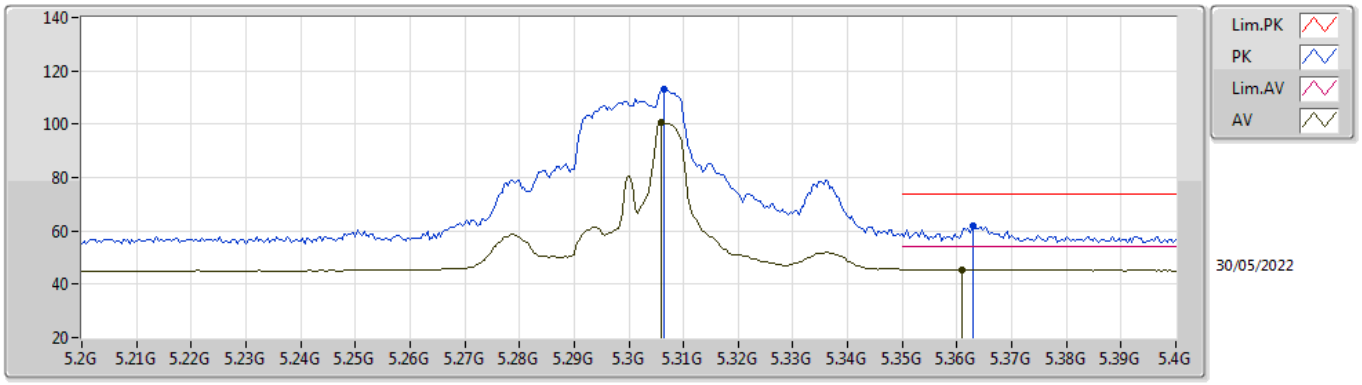


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3064G	113.11	Inf	-Inf	106.75	3	Horizontal	129	1.80	-	34.50	7.20	35.34
AV	5.306G	100.92	Inf	-Inf	94.56	3	Horizontal	129	1.80	-	34.50	7.20	35.34
PK	5.3628G	61.85	74.00	-12.15	55.46	3	Horizontal	129	1.80	-	34.53	7.20	35.34
AV	5.3608G	45.59	54.00	-8.41	39.21	3	Horizontal	129	1.80	-	34.52	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

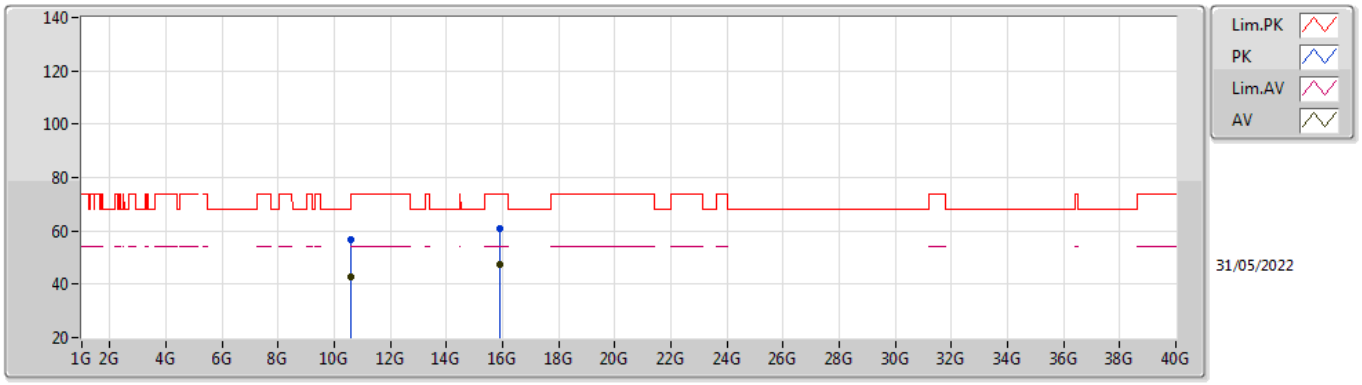


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6138G	56.62	74.00	-17.38	43.17	3	Vertical	65	1.54	-	38.23	10.59	35.37
AV	10.6138G	42.80	54.00	-11.20	29.35	3	Vertical	65	1.54	-	38.23	10.59	35.37
PK	15.9212G	60.83	74.00	-13.17	45.63	3	Vertical	180	1.98	-	37.56	13.36	35.72
AV	15.9212G	47.22	54.00	-6.78	32.02	3	Vertical	180	1.98	-	37.56	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

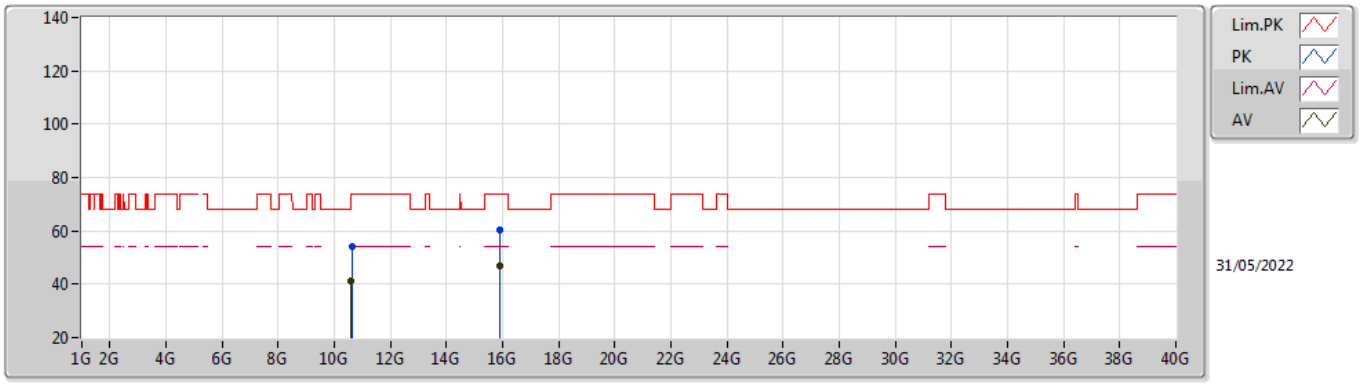


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.616G	54.31	74.00	-19.69	40.86	3	Horizontal	305	1.06	-	38.23	10.59	35.37
AV	10.6142G	41.07	54.00	-12.93	27.62	3	Horizontal	305	1.06	-	38.23	10.59	35.37
PK	15.9212G	60.22	74.00	-13.78	45.02	3	Horizontal	186	1.80	-	37.56	13.36	35.72
AV	15.9212G	47.03	54.00	-6.97	31.83	3	Horizontal	186	1.80	-	37.56	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

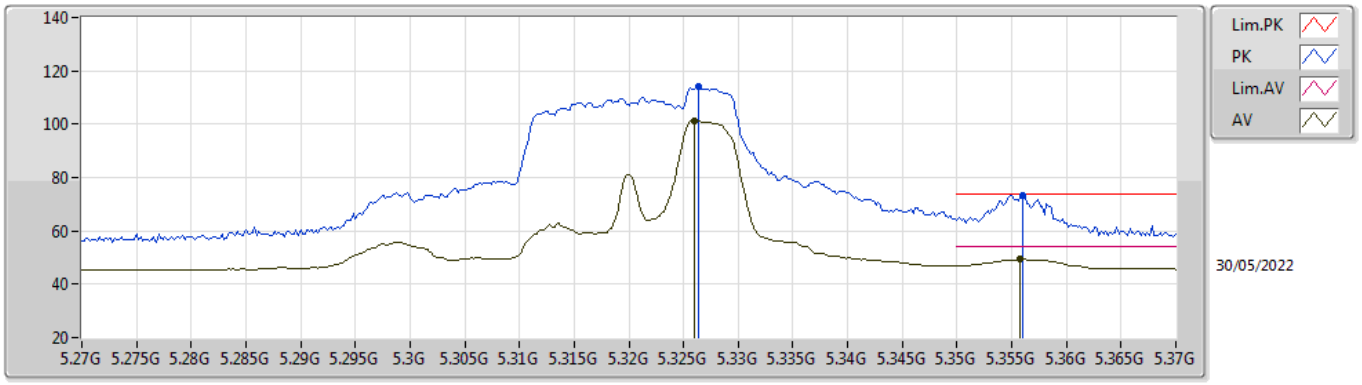


EUT Z_1TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3264G	113.96	Inf	-Inf	107.60	3	Vertical	138	1.80	-	34.50	7.20	35.34
AV	5.326G	101.43	Inf	-Inf	95.07	3	Vertical	138	1.80	-	34.50	7.20	35.34
PK	5.356G	73.34	74.00	-0.66	66.97	3	Vertical	138	1.80	-	34.51	7.20	35.34
AV	5.3558G	49.25	54.00	-4.75	42.88	3	Vertical	138	1.80	-	34.51	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

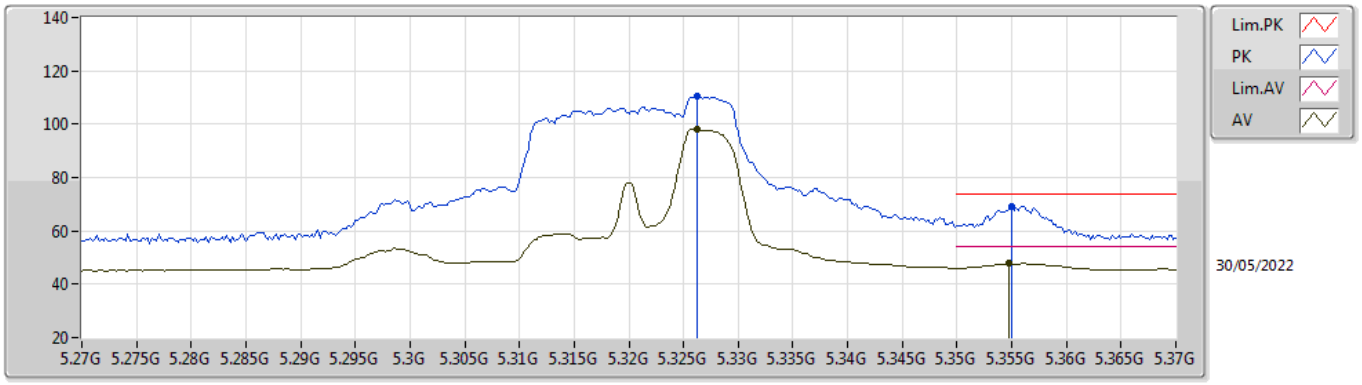


EUT Z_1TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3262G	110.60	Inf	-Inf	104.24	3	Horizontal	130	1.80	-	34.50	7.20	35.34
AV	5.3262G	98.35	Inf	-Inf	91.99	3	Horizontal	130	1.80	-	34.50	7.20	35.34
PK	5.355G	69.21	74.00	-4.79	62.84	3	Horizontal	130	1.80	-	34.51	7.20	35.34
AV	5.3548G	47.75	54.00	-6.25	41.38	3	Horizontal	130	1.80	-	34.51	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

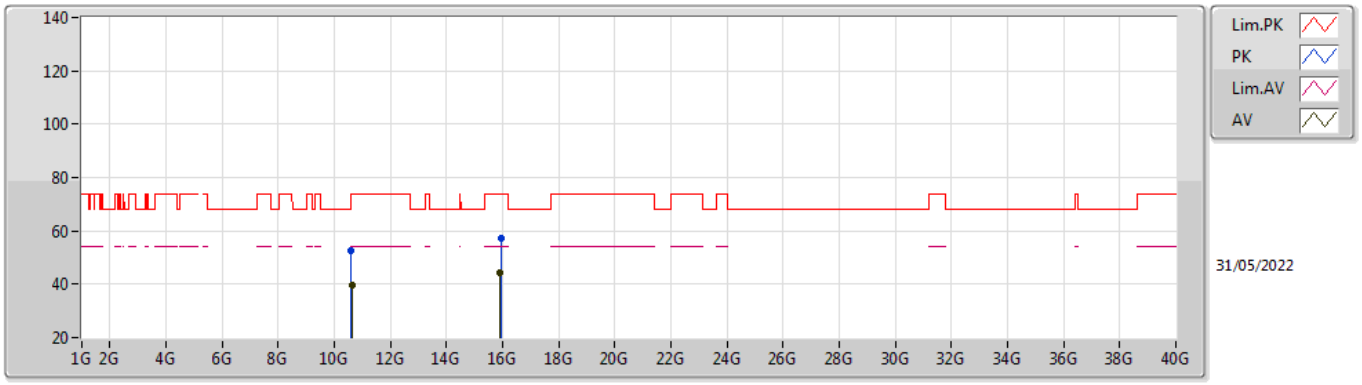


EUT X_1TX
Setting 18
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6034G	52.81	74.00	-21.19	39.39	3	Vertical	338	2.46	-	38.21	10.59	35.38
AV	10.6358G	39.54	54.00	-14.46	26.02	3	Vertical	338	2.46	-	38.27	10.60	35.35
PK	15.9462G	57.01	74.00	-16.99	41.87	3	Vertical	309	1.54	-	37.51	13.37	35.74
AV	15.9112G	44.13	54.00	-9.87	28.91	3	Vertical	309	1.54	-	37.58	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

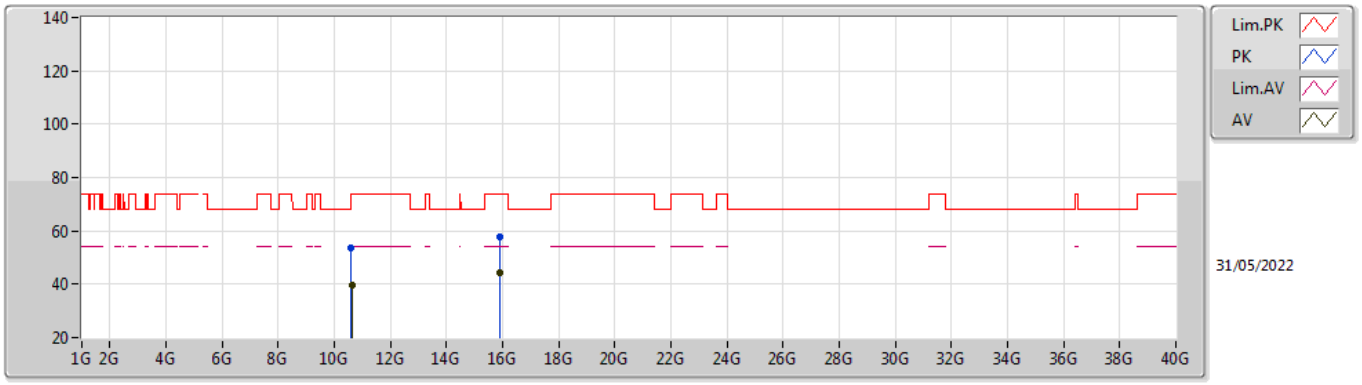


EUT X_1TX
Setting 18
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6006G	53.56	74.00	-20.44	40.15	3	Horizontal	331	1.13	-	38.20	10.59	35.38
AV	10.6628G	39.55	54.00	-14.45	25.95	3	Horizontal	331	1.13	-	38.33	10.60	35.33
PK	15.9186G	57.77	74.00	-16.23	42.57	3	Horizontal	223	1.31	-	37.56	13.36	35.72
AV	15.915G	44.08	54.00	-9.92	28.87	3	Horizontal	223	1.31	-	37.57	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

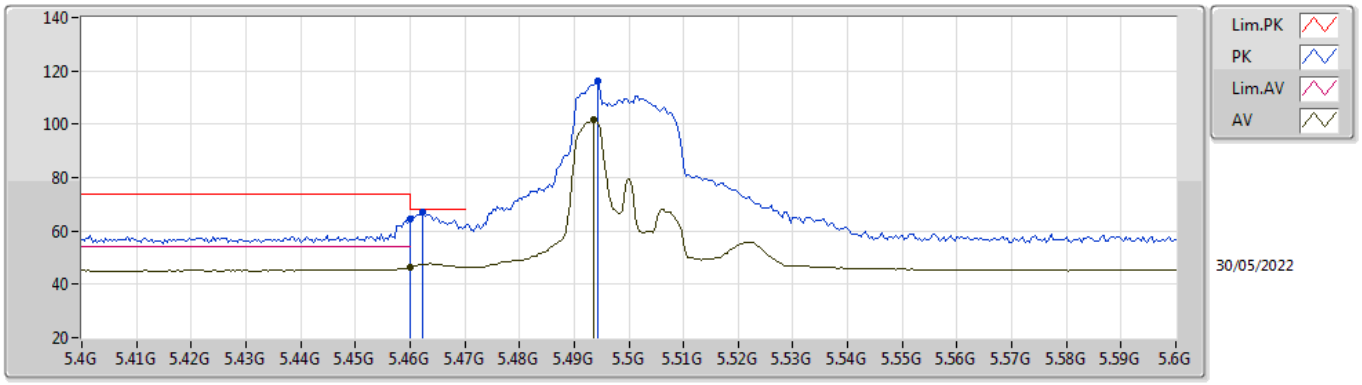


EUT Z_1TX
Setting 19
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.46G	64.73	74.00	-9.27	58.30	3	Vertical	132	2.16	-	34.52	7.26	35.35
AV	5.46G	46.53	54.00	-7.47	40.10	3	Vertical	132	2.16	-	34.52	7.26	35.35
PK	5.4624G	67.02	68.20	-1.18	60.59	3	Vertical	132	2.16	-	34.52	7.26	35.35
PK	5.4944G	116.39	Inf	-Inf	109.86	3	Vertical	132	2.16	-	34.59	7.29	35.35
AV	5.4936G	101.93	Inf	-Inf	95.40	3	Vertical	132	2.16	-	34.59	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

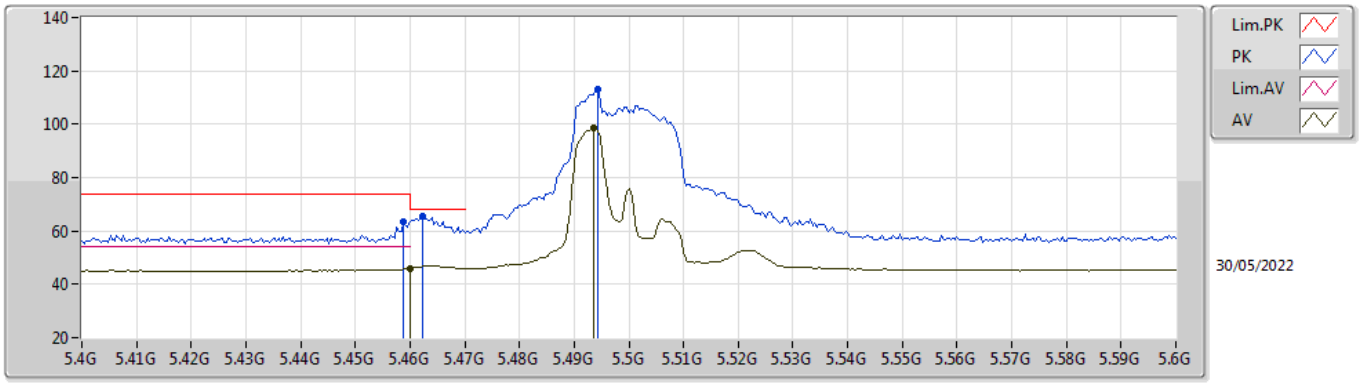


EUT Z_1TX
Setting 19
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4588G	63.36	74.00	-10.64	56.93	3	Horizontal	130	1.92	-	34.52	7.26	35.35
AV	5.46G	45.90	54.00	-8.10	39.47	3	Horizontal	130	1.92	-	34.52	7.26	35.35
PK	5.4624G	65.64	68.20	-2.56	59.21	3	Horizontal	130	1.92	-	34.52	7.26	35.35
PK	5.4944G	113.22	Inf	-Inf	106.69	3	Horizontal	130	1.92	-	34.59	7.29	35.35
AV	5.4936G	98.74	Inf	-Inf	92.21	3	Horizontal	130	1.92	-	34.59	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

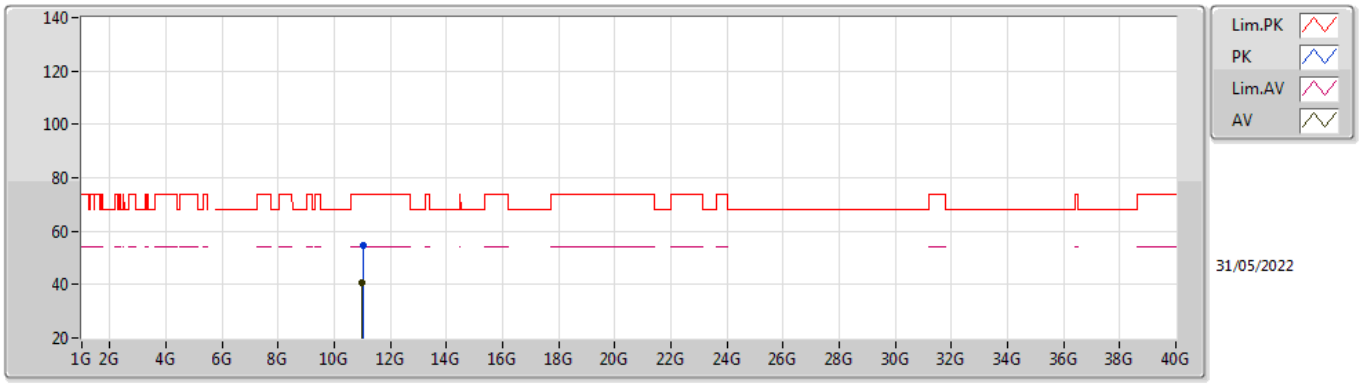


EUT X_1TX
Setting 19
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0146G	54.64	74.00	-19.36	40.64	3	Vertical	269	2.15	-	38.41	10.65	35.06
AV	10.9996G	40.79	54.00	-13.21	26.78	3	Vertical	269	2.15	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

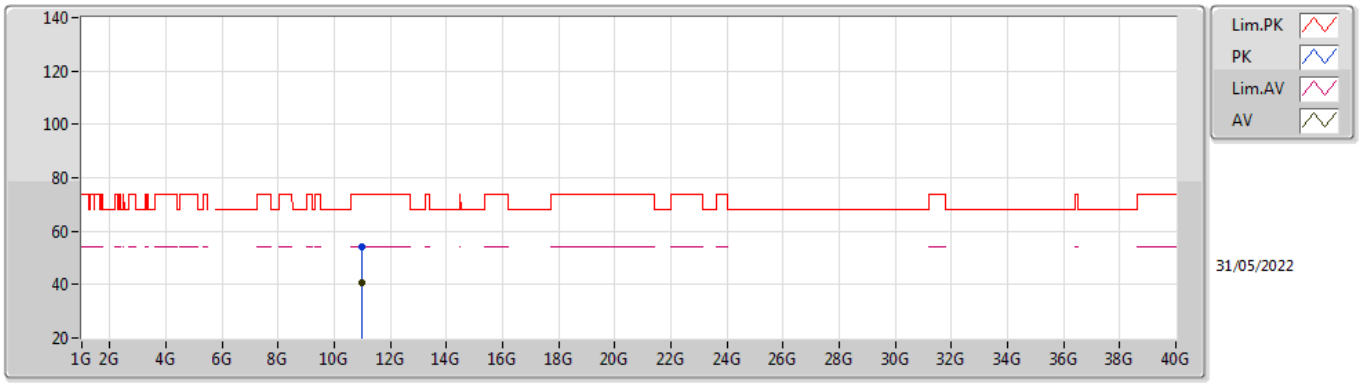


EUT X_1TX
Setting 19
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9984G	54.21	74.00	-19.79	40.20	3	Horizontal	203	1.17	-	38.40	10.65	35.04
AV	10.9862G	40.75	54.00	-13.25	26.76	3	Horizontal	203	1.17	-	38.39	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

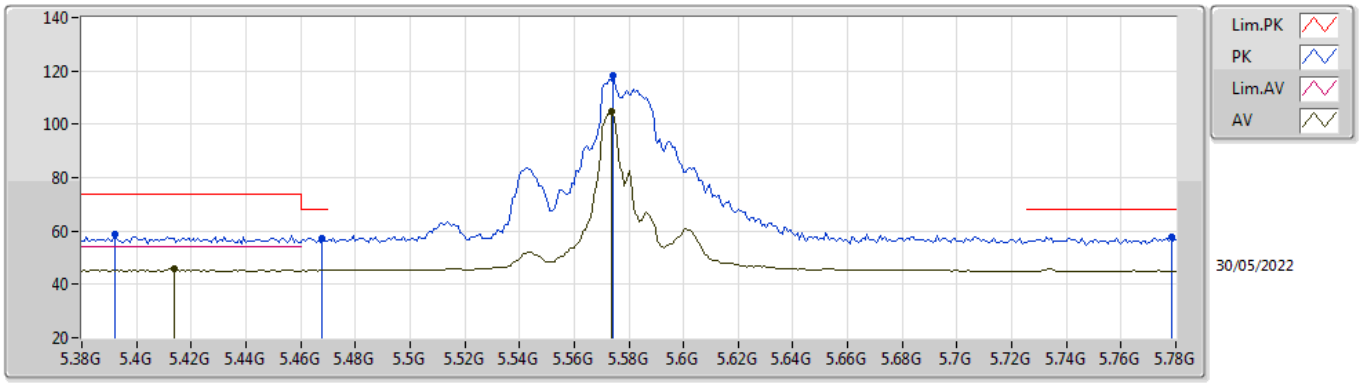


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.392G	58.68	74.00	-15.32	52.25	3	Vertical	168	1.80	-	34.58	7.20	35.35
AV	5.4136G	45.94	54.00	-8.06	39.51	3	Vertical	168	1.80	-	34.57	7.21	35.35
PK	5.468G	57.30	68.20	-10.90	50.84	3	Vertical	168	1.80	-	34.54	7.27	35.35
PK	5.5744G	118.51	Inf	-Inf	111.93	3	Vertical	168	1.80	-	34.60	7.37	35.39
AV	5.5736G	104.91	Inf	-Inf	98.33	3	Vertical	168	1.80	-	34.60	7.37	35.39
PK	5.7784G	57.79	68.20	-10.41	51.68	3	Vertical	168	1.80	-	34.20	7.40	35.49

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

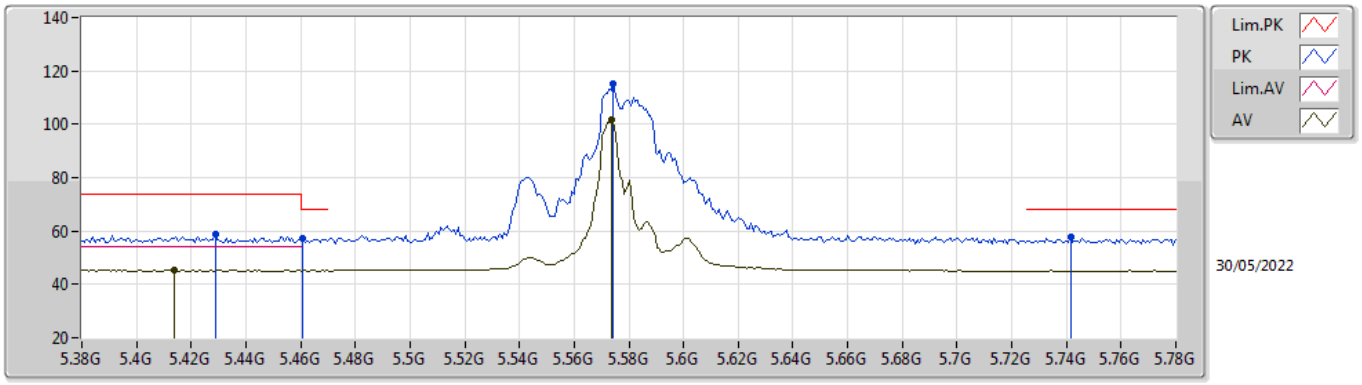


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4288G	58.57	74.00	-15.43	52.15	3	Horizontal	132	1.68	-	34.54	7.23	35.35
AV	5.4136G	45.56	54.00	-8.44	39.13	3	Horizontal	132	1.68	-	34.57	7.21	35.35
PK	5.4608G	57.27	68.20	-10.93	50.84	3	Horizontal	132	1.68	-	34.52	7.26	35.35
PK	5.5744G	115.12	Inf	-Inf	108.54	3	Horizontal	132	1.68	-	34.60	7.37	35.39
AV	5.5736G	101.69	Inf	-Inf	95.11	3	Horizontal	132	1.68	-	34.60	7.37	35.39
PK	5.7416G	57.65	68.20	-10.55	51.50	3	Horizontal	132	1.68	-	34.22	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

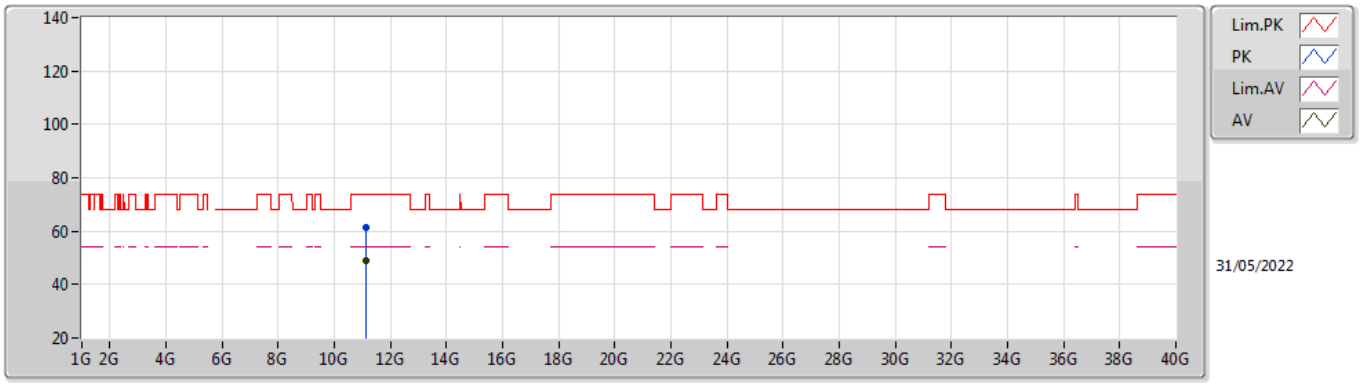


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1462G	61.48	74.00	-12.52	47.46	3	Vertical	191	2.80	-	38.55	10.67	35.20
AV	11.1462G	49.09	54.00	-4.91	35.07	3	Vertical	191	2.80	-	38.55	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

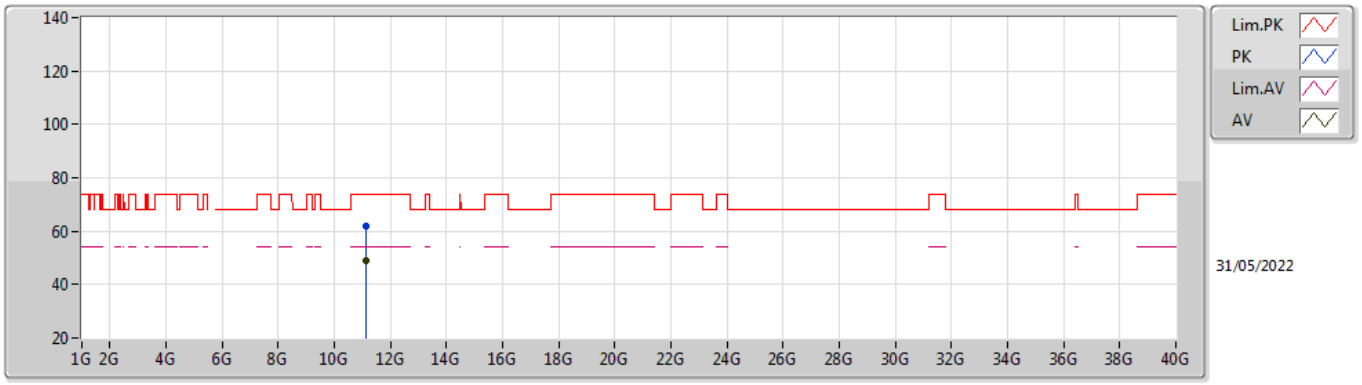


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1458G	62.08	74.00	-11.92	48.06	3	Horizontal	255	2.14	-	38.55	10.67	35.20
AV	11.1462G	49.16	54.00	-4.84	35.14	3	Horizontal	255	2.14	-	38.55	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

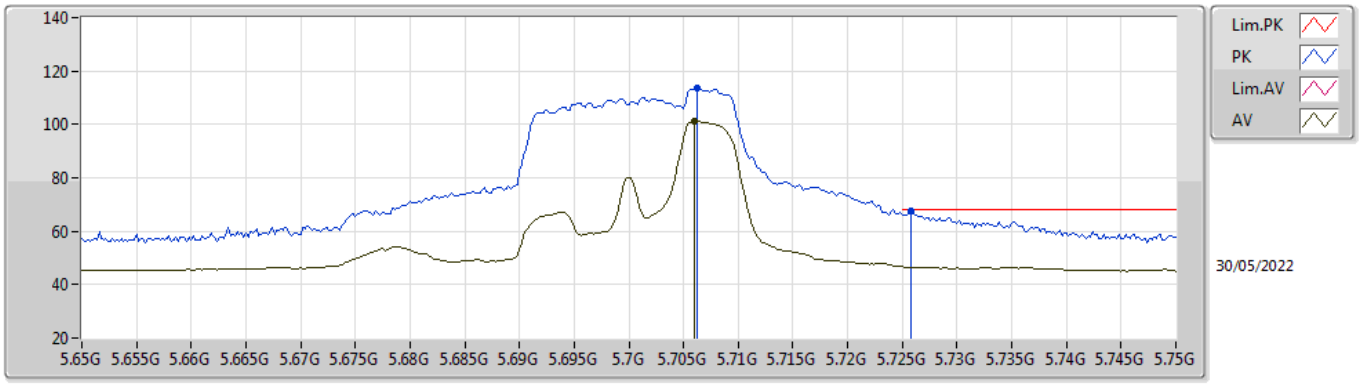


EUT Z_1TX
Setting 18.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7062G	113.69	Inf	-Inf	107.45	3	Vertical	133	1.92	-	34.29	7.40	35.45
AV	5.706G	101.34	Inf	-Inf	95.10	3	Vertical	133	1.92	-	34.29	7.40	35.45
PK	5.7258G	67.39	68.20	-0.81	61.20	3	Vertical	133	1.92	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

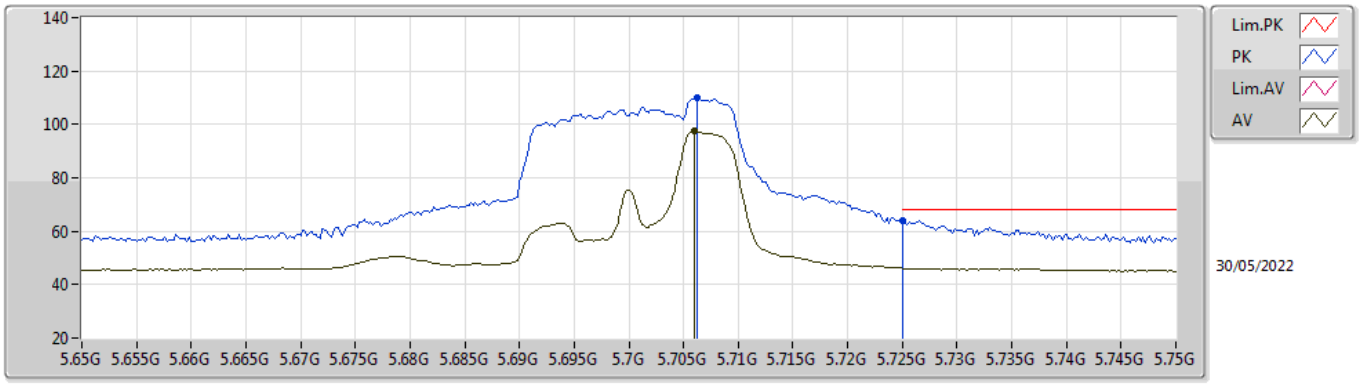


EUT Z_1TX
Setting 18.25
03-B-E-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7062G	109.84	Inf	-Inf	103.60	3	Horizontal	123	1.78	-	34.29	7.40	35.45
AV	5.706G	97.56	Inf	-Inf	91.32	3	Horizontal	123	1.78	-	34.29	7.40	35.45
PK	5.725G	64.13	68.20	-4.07	57.94	3	Horizontal	123	1.78	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

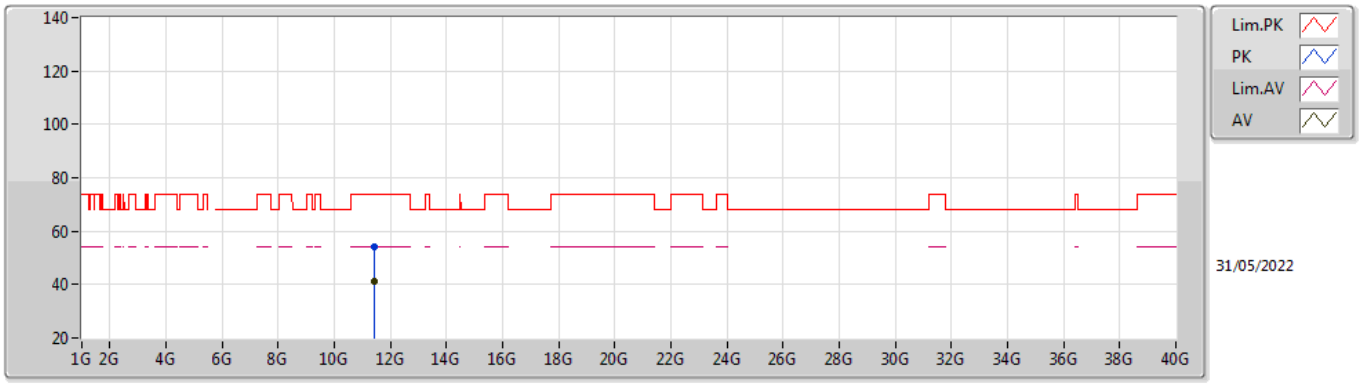


EUT X_1TX
Setting 18.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4162G	54.20	74.00	-19.80	40.17	3	Vertical	274	1.59	-	38.83	10.71	35.51
AV	11.4354G	41.16	54.00	-12.84	27.10	3	Vertical	274	1.59	-	38.87	10.72	35.53

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

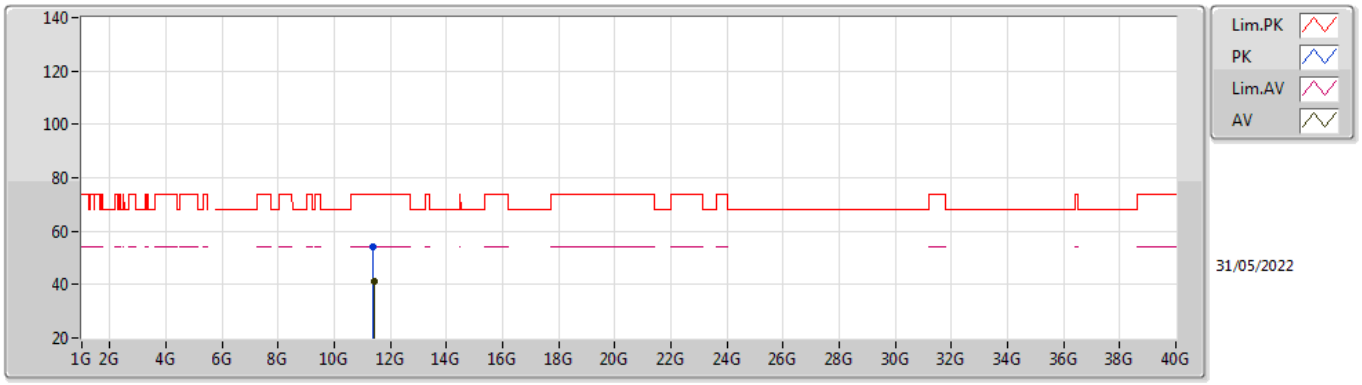


EUT X_1TX
Setting 18.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.3808G	54.03	74.00	-19.97	40.01	3	Horizontal	113	1.50	-	38.78	10.71	35.47
AV	11.4204G	41.13	54.00	-12.87	27.09	3	Horizontal	113	1.50	-	38.84	10.71	35.51

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

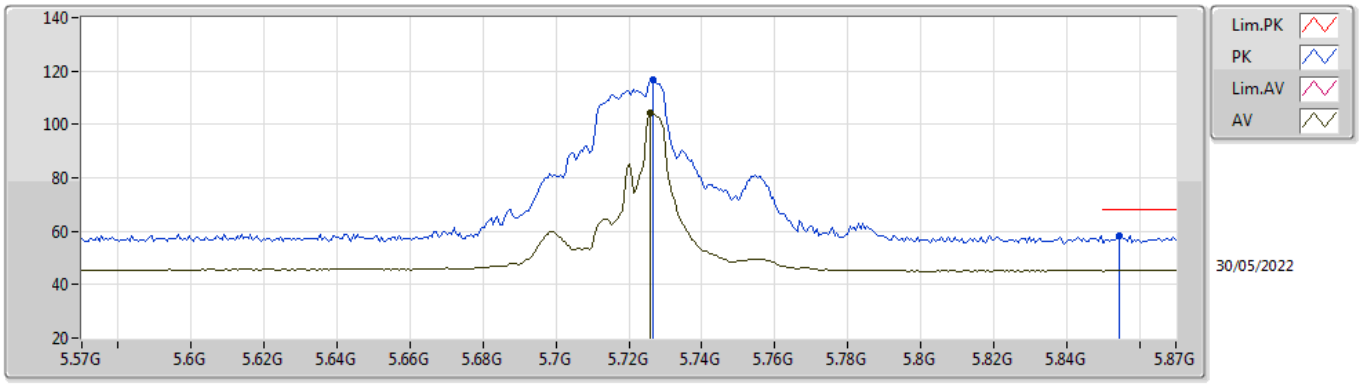


EUT Z_1TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7266G	116.50	Inf	-Inf	110.31	3	Vertical	134	1.86	-	34.25	7.40	35.46
AV	5.726G	104.30	Inf	-Inf	98.11	3	Vertical	134	1.86	-	34.25	7.40	35.46
PK	5.8544G	58.16	68.20	-10.04	51.91	3	Vertical	134	1.86	-	34.33	7.45	35.53

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

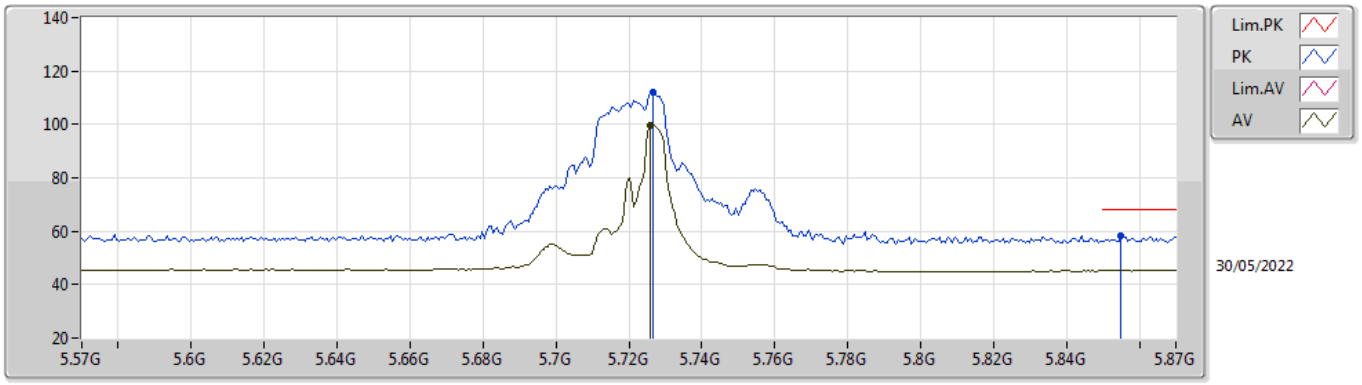


EUT Z_1TX
Setting 21.5
03-B-E-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7266G	111.96	Inf	-Inf	105.77	3	Horizontal	125	1.80	-	34.25	7.40	35.46
AV	5.726G	99.75	Inf	-Inf	93.56	3	Horizontal	125	1.80	-	34.25	7.40	35.46
PK	5.855G	58.11	68.20	-10.09	51.85	3	Horizontal	125	1.80	-	34.33	7.46	35.53

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

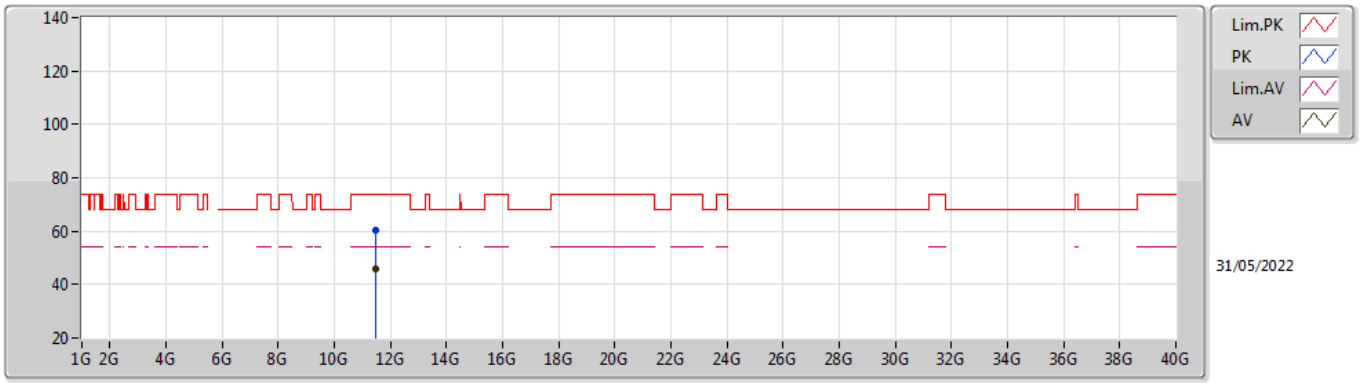


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4538G	60.53	74.00	-13.47	46.45	3	Vertical	157	2.83	-	38.91	10.72	35.55
AV	11.454G	46.11	54.00	-7.89	32.03	3	Vertical	157	2.83	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

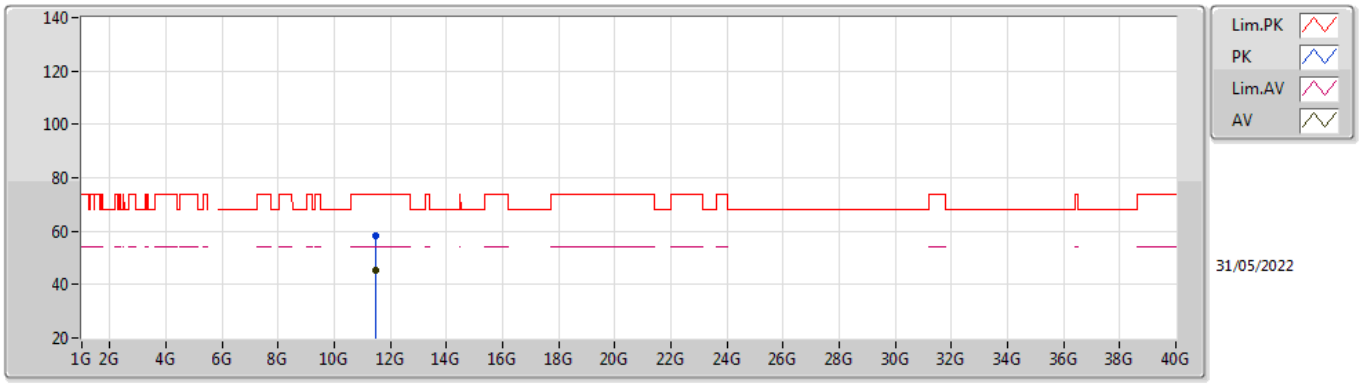


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.453G	58.19	74.00	-15.81	44.11	3	Horizontal	248	2.90	-	38.91	10.72	35.55
AV	11.454G	45.48	54.00	-8.52	31.40	3	Horizontal	248	2.90	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

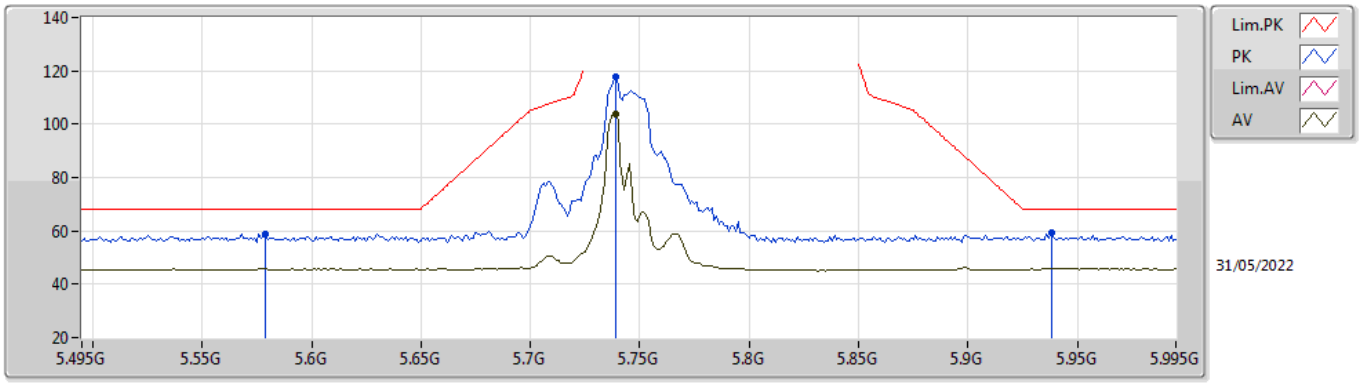


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.579G	59.04	68.20	-9.16	52.45	3	Vertical	133	1.80	-	34.60	7.38	35.39
PK	5.739G	117.63	Inf	-Inf	111.48	3	Vertical	133	1.80	-	34.22	7.40	35.47
AV	5.739G	103.80	Inf	-Inf	97.65	3	Vertical	133	1.80	-	34.22	7.40	35.47
PK	5.938G	59.07	68.20	-9.13	52.35	3	Vertical	133	1.80	-	34.75	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

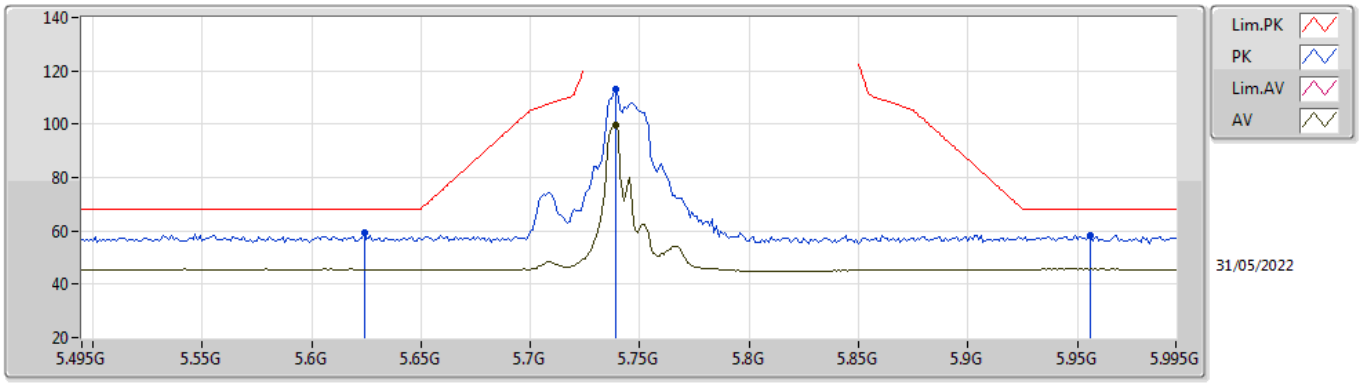


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.624G	59.25	68.20	-8.95	52.71	3	Horizontal	123	1.77	-	34.55	7.40	35.41
PK	5.739G	113.19	Inf	-Inf	107.04	3	Horizontal	123	1.77	-	34.22	7.40	35.47
AV	5.739G	99.42	Inf	-Inf	93.27	3	Horizontal	123	1.77	-	34.22	7.40	35.47
PK	5.956G	58.17	68.20	-10.03	51.39	3	Horizontal	123	1.77	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

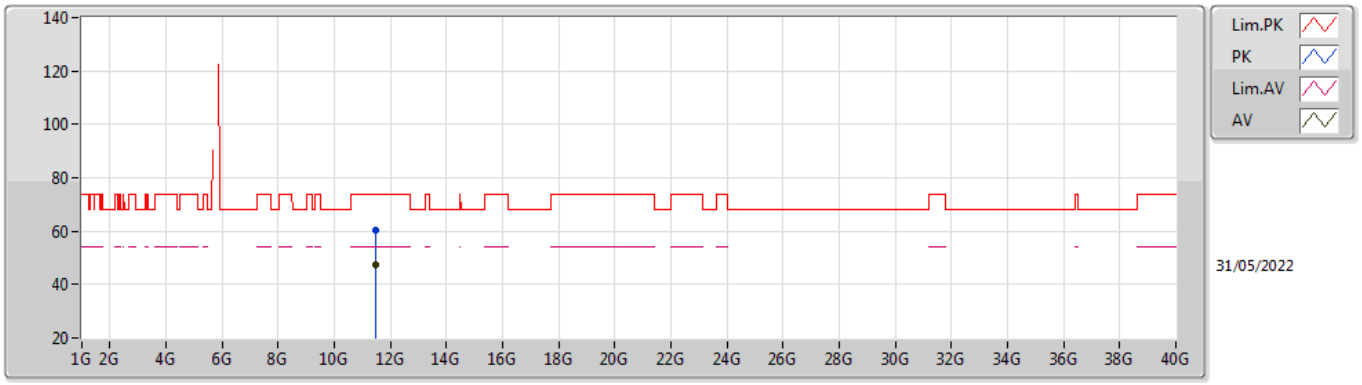


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4758G	60.34	74.00	-13.66	46.24	3	Vertical	161	2.94	-	38.95	10.72	35.57
AV	11.4762G	47.25	54.00	-6.75	33.15	3	Vertical	161	2.94	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

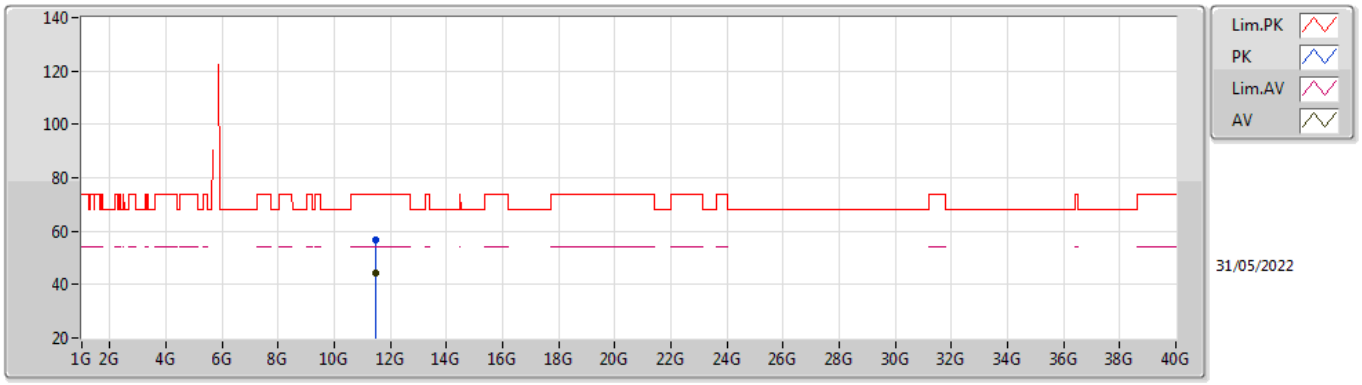


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4748G	56.90	74.00	-17.10	42.80	3	Horizontal	244	1.80	-	38.95	10.72	35.57
AV	11.476G	44.51	54.00	-9.49	30.41	3	Horizontal	244	1.80	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

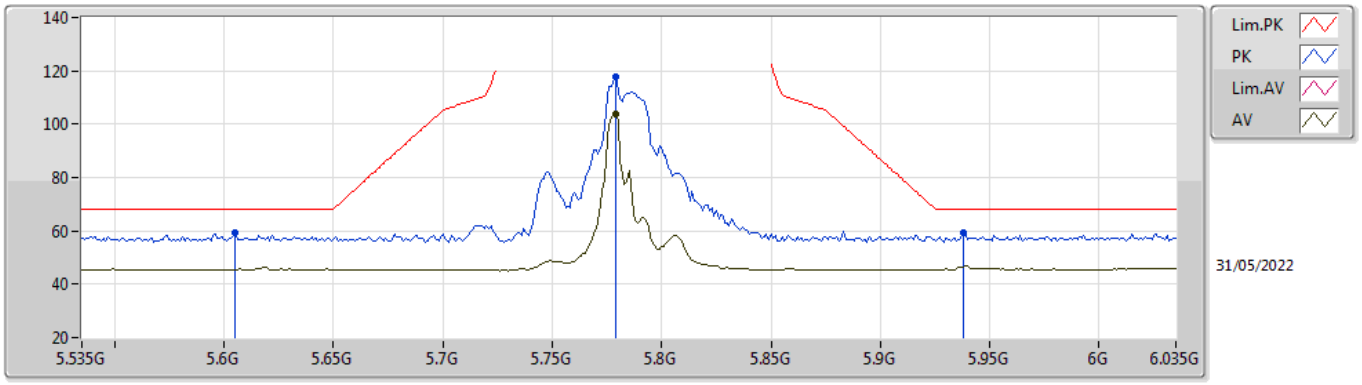


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.605G	59.53	68.20	-8.67	52.94	3	Vertical	135	1.80	-	34.59	7.40	35.40
PK	5.779G	117.51	Inf	-Inf	111.40	3	Vertical	135	1.80	-	34.20	7.40	35.49
AV	5.779G	103.70	Inf	-Inf	97.59	3	Vertical	135	1.80	-	34.20	7.40	35.49
PK	5.938G	59.07	68.20	-9.13	52.35	3	Vertical	135	1.80	-	34.75	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

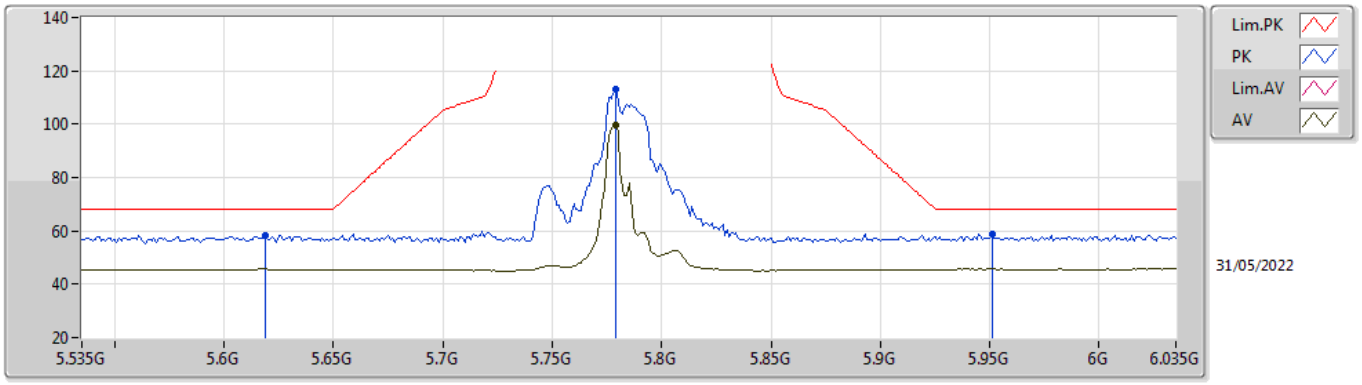


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.619G	58.36	68.20	-9.84	51.81	3	Horizontal	122	1.64	-	34.56	7.40	35.41
PK	5.779G	112.95	Inf	-Inf	106.84	3	Horizontal	122	1.64	-	34.20	7.40	35.49
AV	5.779G	99.50	Inf	-Inf	93.39	3	Horizontal	122	1.64	-	34.20	7.40	35.49
PK	5.951G	58.93	68.20	-9.27	52.16	3	Horizontal	122	1.64	-	34.80	7.55	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

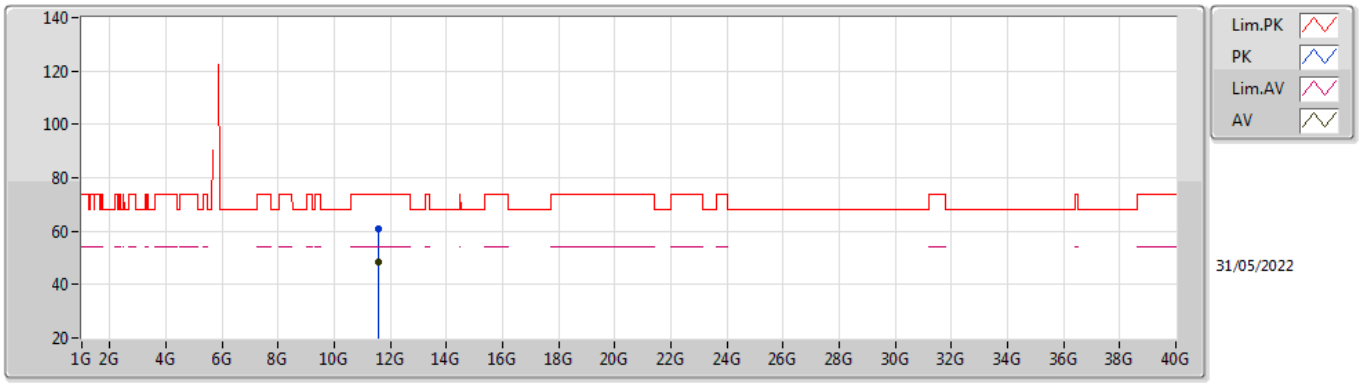


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5558G	60.87	74.00	-13.13	46.51	3	Vertical	164	3.00	-	39.22	10.73	35.59
AV	11.5562G	48.52	54.00	-5.48	34.16	3	Vertical	164	3.00	-	39.22	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

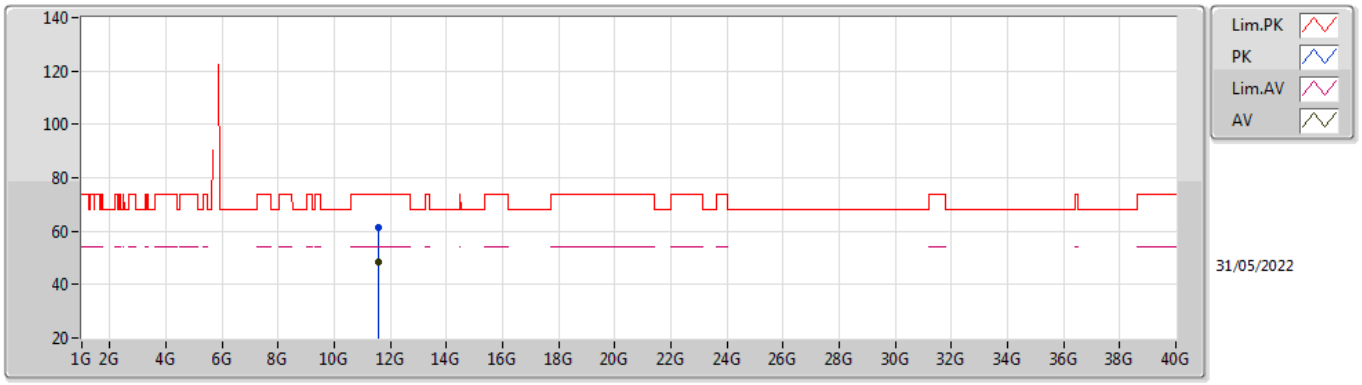


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.556G	61.47	74.00	-12.53	47.11	3	Horizontal	134	2.09	-	39.22	10.73	35.59
AV	11.556G	48.19	54.00	-5.81	33.83	3	Horizontal	134	2.09	-	39.22	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

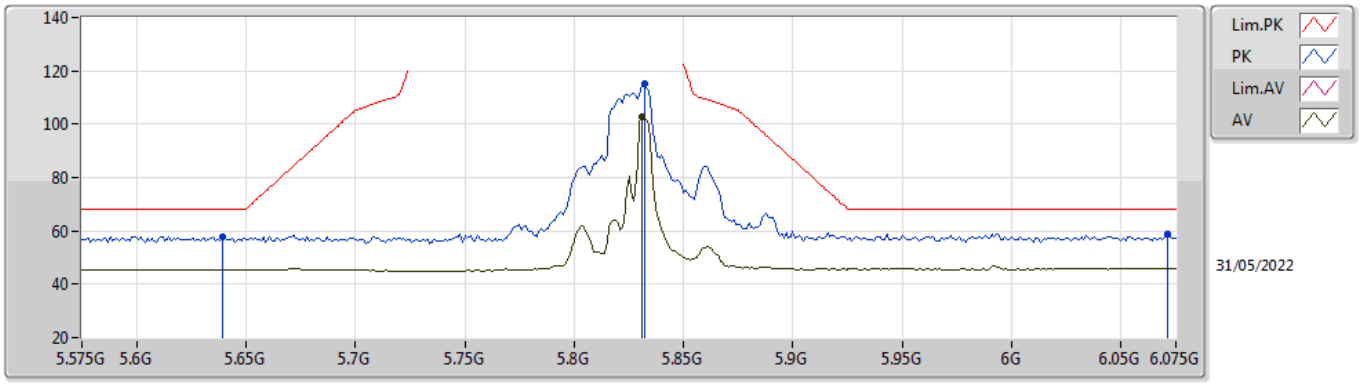


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.639G	57.78	68.20	-10.42	51.28	3	Vertical	132	1.80	-	34.52	7.40	35.42
PK	5.832G	115.00	Inf	-Inf	108.83	3	Vertical	132	1.80	-	34.26	7.43	35.52
AV	5.831G	102.77	Inf	-Inf	96.60	3	Vertical	132	1.80	-	34.26	7.43	35.52
PK	6.071G	58.72	68.20	-9.48	51.71	3	Vertical	132	1.80	-	34.94	7.64	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

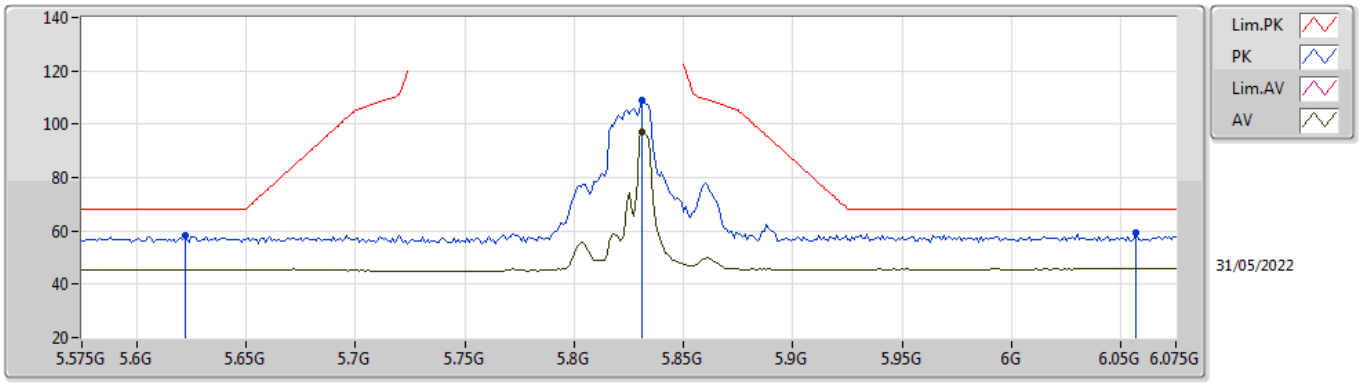


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.622G	58.24	68.20	-9.96	51.69	3	Horizontal	58	1.78	-	34.56	7.40	35.41
PK	5.831G	109.06	Inf	-Inf	102.89	3	Horizontal	58	1.78	-	34.26	7.43	35.52
AV	5.831G	96.95	Inf	-Inf	90.78	3	Horizontal	58	1.78	-	34.26	7.43	35.52
PK	6.057G	59.06	68.20	-9.14	52.10	3	Horizontal	58	1.78	-	34.91	7.63	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

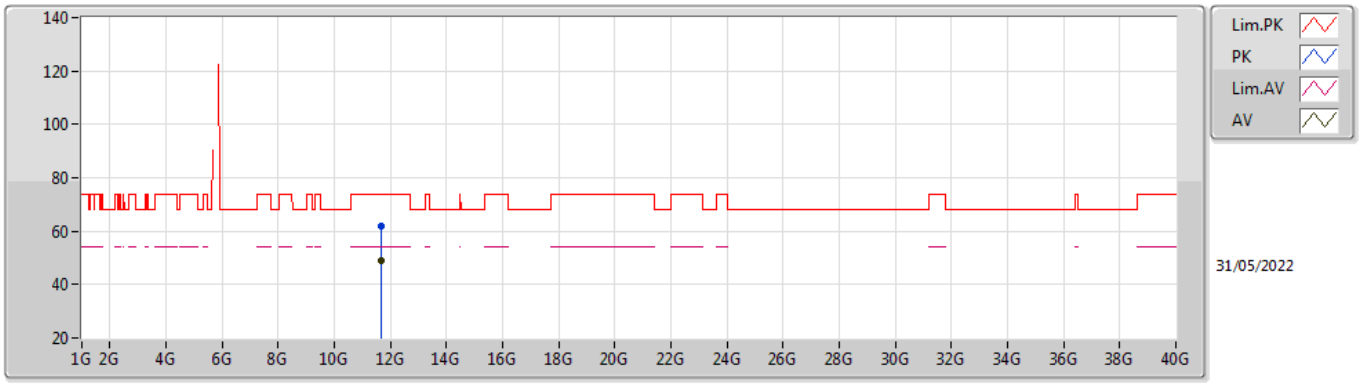


EUT X_1TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6626G	62.01	74.00	-11.99	47.42	3	Vertical	164	2.89	-	39.40	10.75	35.56
AV	11.664G	48.75	54.00	-5.25	34.16	3	Vertical	164	2.89	-	39.40	10.75	35.56

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

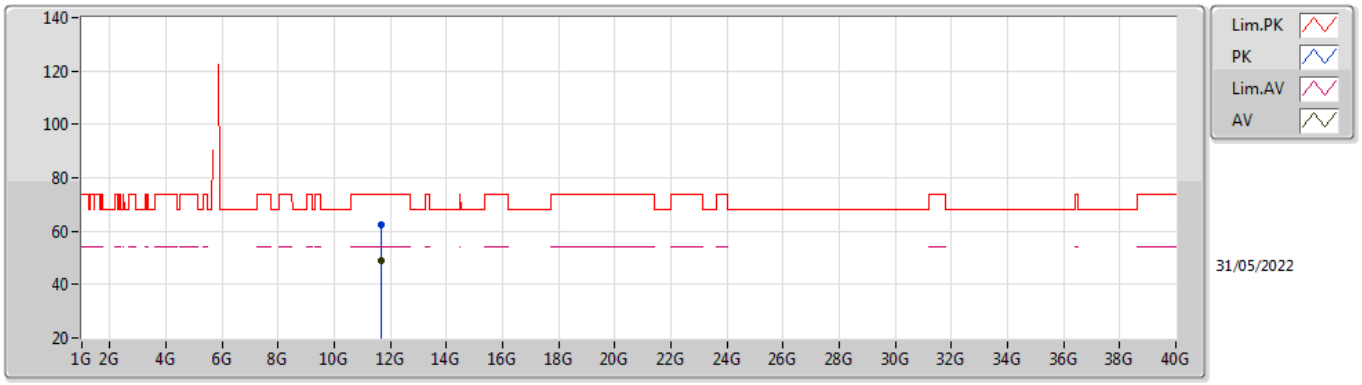

EUT X_1TX
Setting 21.5
03-B-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6654G	62.17	74.00	-11.83	47.58	3	Horizontal	204	2.05	-	39.40	10.75	35.56
AV	11.664G	48.90	54.00	-5.10	34.31	3	Horizontal	204	2.05	-	39.40	10.75	35.56

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	PK	5.35G	73.92	74.00	-0.08	3	Vertical	138	1.90	-

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

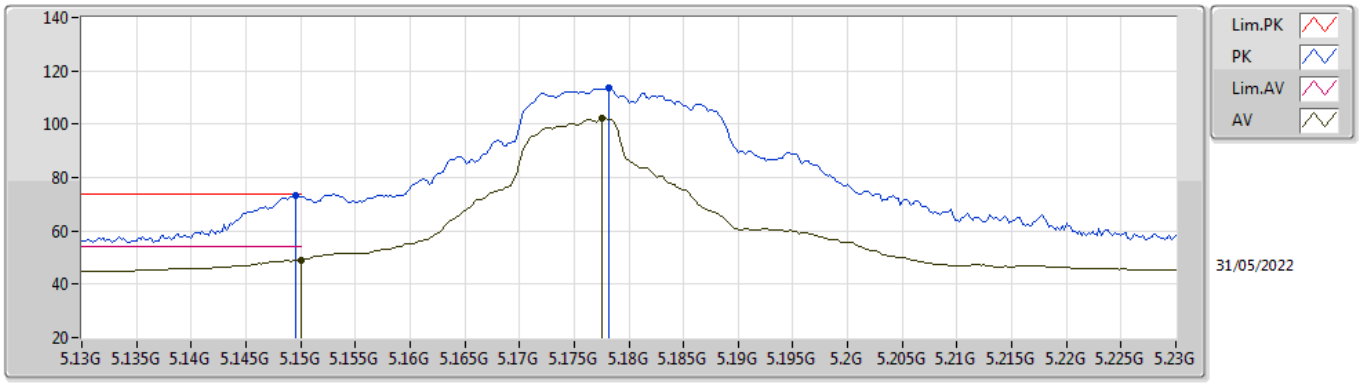


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1496G	73.15	74.00	-0.85	67.32	3	Vertical	138	1.80	-	34.00	7.17	35.34
AV	5.15G	49.14	54.00	-4.86	43.31	3	Vertical	138	1.80	-	34.00	7.17	35.34
PK	5.1782G	113.76	Inf	-Inf	107.80	3	Vertical	138	1.80	-	34.11	7.19	35.34
AV	5.1776G	102.25	Inf	-Inf	96.29	3	Vertical	138	1.80	-	34.11	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

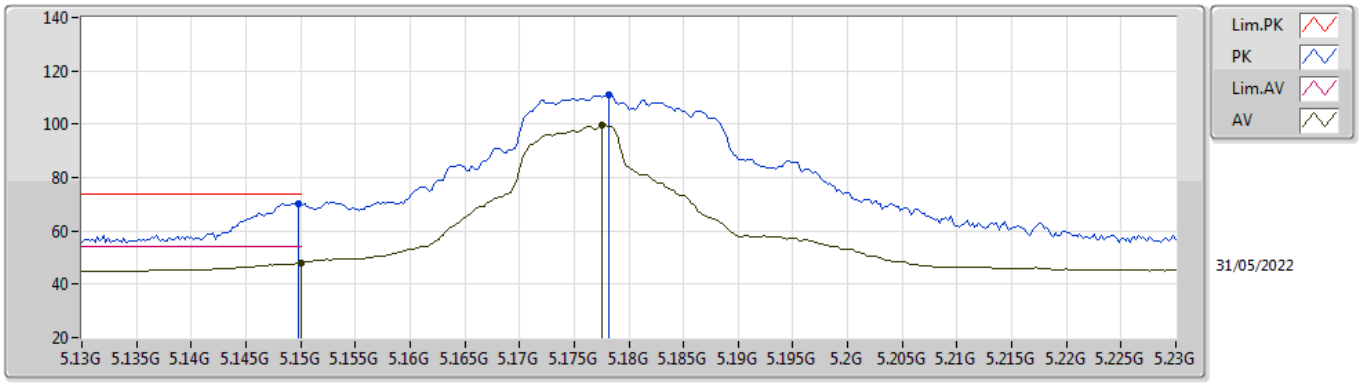


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1498G	70.37	74.00	-3.63	64.54	3	Horizontal	179	1.80	-	34.00	7.17	35.34
AV	5.15G	47.90	54.00	-6.10	42.07	3	Horizontal	179	1.80	-	34.00	7.17	35.34
PK	5.1782G	111.15	Inf	-Inf	105.19	3	Horizontal	179	1.80	-	34.11	7.19	35.34
AV	5.1776G	99.66	Inf	-Inf	93.70	3	Horizontal	179	1.80	-	34.11	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

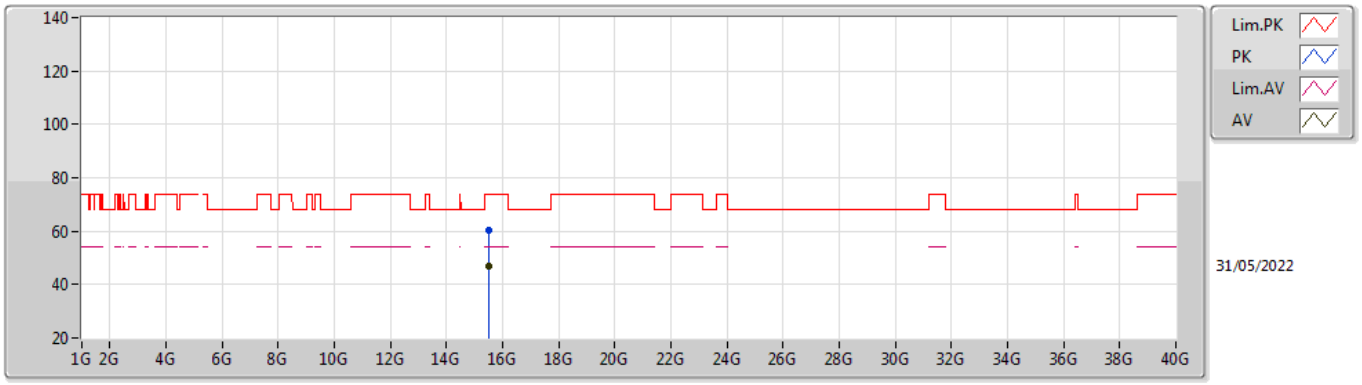


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5282G	60.36	74.00	-13.64	44.09	3	Vertical	150	2.30	-	38.50	13.16	35.39
AV	15.5272G	46.90	54.00	-7.10	30.62	3	Vertical	150	2.30	-	38.51	13.16	35.39

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

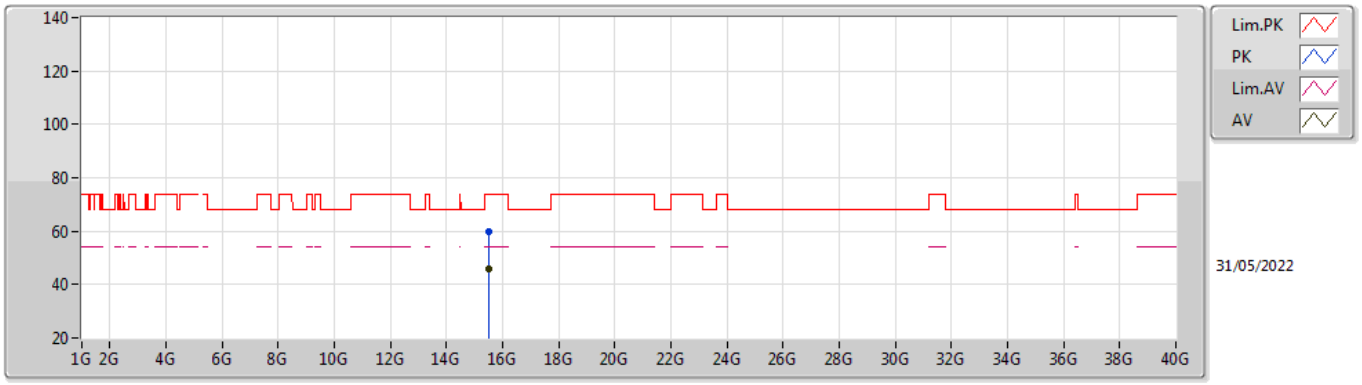


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5304G	59.69	74.00	-14.31	43.43	3	Horizontal	274	1.80	-	38.49	13.17	35.40
AV	15.5274G	46.03	54.00	-7.97	29.75	3	Horizontal	274	1.80	-	38.51	13.16	35.39

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

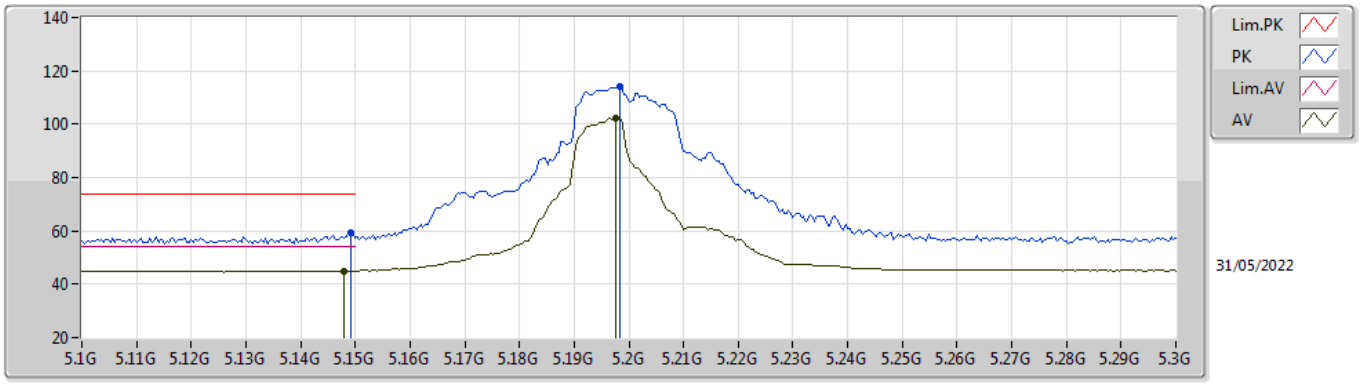


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1492G	59.41	74.00	-14.59	53.58	3	Vertical	138	1.76	-	34.00	7.17	35.34
AV	5.148G	45.06	54.00	-8.94	39.23	3	Vertical	138	1.76	-	34.00	7.17	35.34
PK	5.1984G	114.04	Inf	-Inf	107.99	3	Vertical	138	1.76	-	34.19	7.20	35.34
AV	5.1976G	102.47	Inf	-Inf	96.42	3	Vertical	138	1.76	-	34.19	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

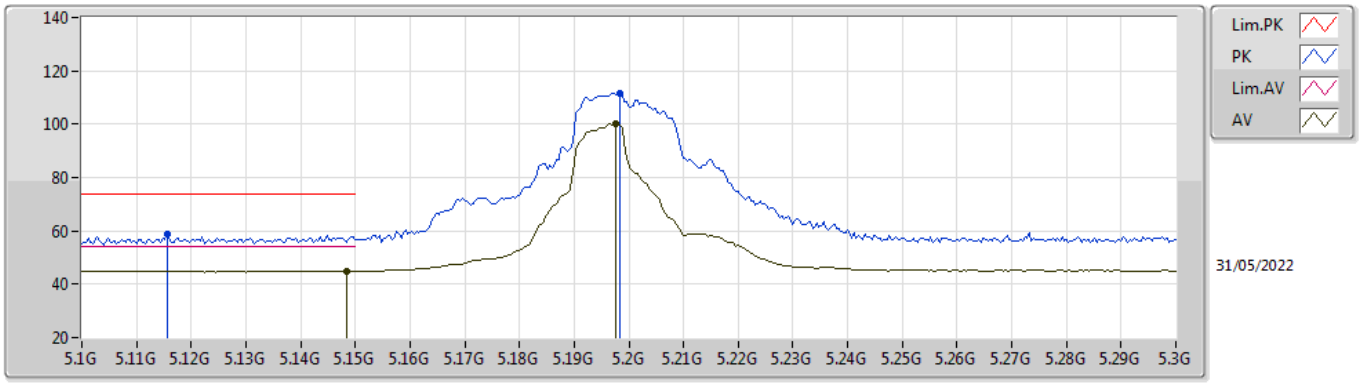


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1156G	58.67	74.00	-15.33	52.91	3	Horizontal	120	1.78	-	33.93	7.16	35.33
AV	5.1484G	44.95	54.00	-9.05	39.12	3	Horizontal	120	1.78	-	34.00	7.17	35.34
PK	5.1984G	111.78	Inf	-Inf	105.73	3	Horizontal	120	1.78	-	34.19	7.20	35.34
AV	5.1976G	100.35	Inf	-Inf	94.30	3	Horizontal	120	1.78	-	34.19	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

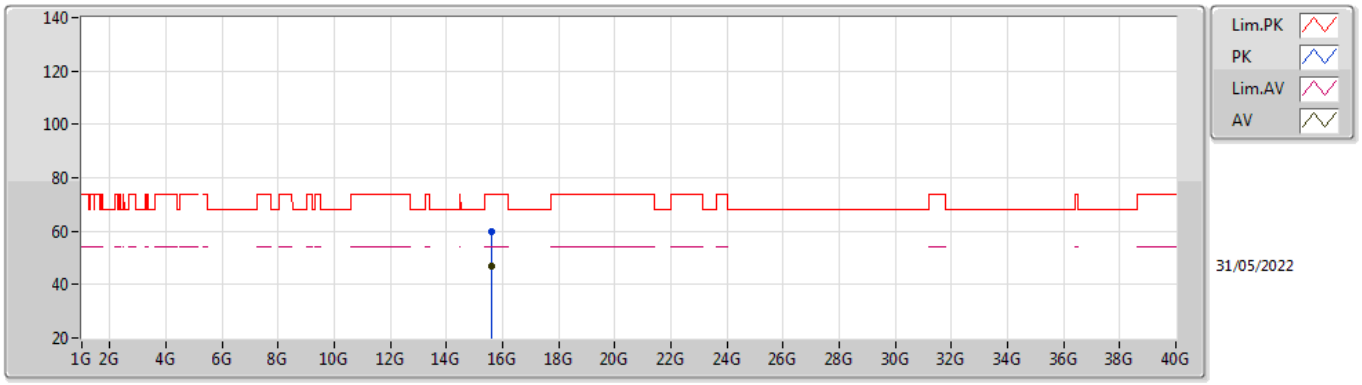


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5888G	59.70	74.00	-14.30	43.87	3	Vertical	148	2.50	-	38.08	13.19	35.44
AV	15.5876G	46.74	54.00	-7.26	30.90	3	Vertical	148	2.50	-	38.09	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

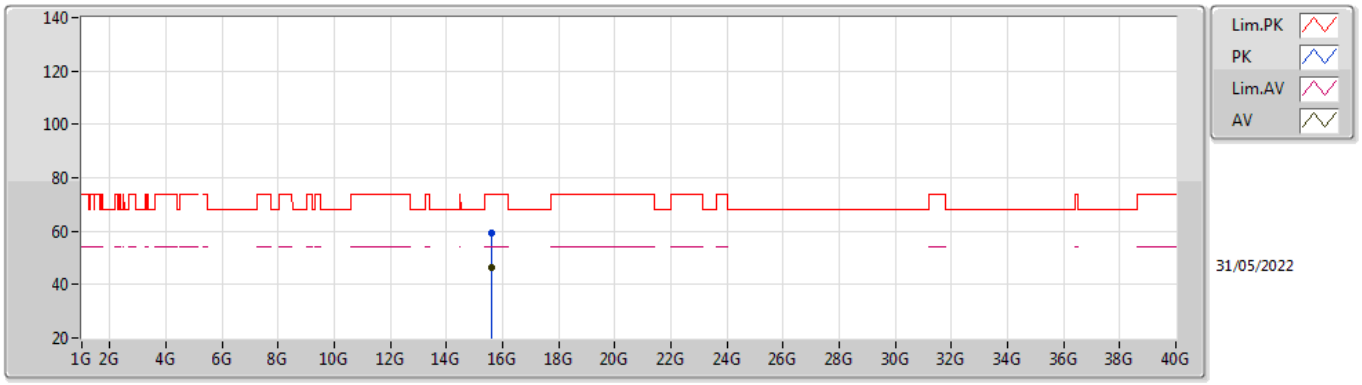


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5882G	59.26	74.00	-14.74	43.43	3	Horizontal	274	1.80	-	38.08	13.19	35.44
AV	15.5874G	46.22	54.00	-7.78	30.38	3	Horizontal	274	1.80	-	38.09	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

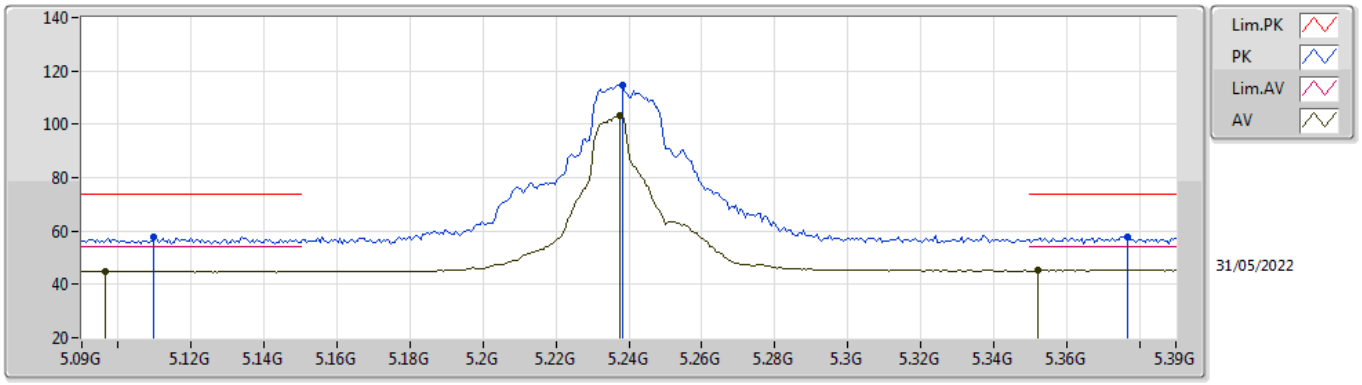


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1098G	57.73	74.00	-16.27	51.99	3	Vertical	137	1.96	-	33.92	7.15	35.33
AV	5.0966G	44.81	54.00	-9.19	39.10	3	Vertical	137	1.96	-	33.89	7.15	35.33
PK	5.2382G	114.72	Inf	-Inf	108.51	3	Vertical	137	1.96	-	34.35	7.20	35.34
AV	5.2376G	103.14	Inf	-Inf	96.93	3	Vertical	137	1.96	-	34.35	7.20	35.34
PK	5.3768G	57.95	74.00	-16.05	51.55	3	Vertical	137	1.96	-	34.55	7.20	35.35
AV	5.3522G	45.26	54.00	-8.74	38.90	3	Vertical	137	1.96	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

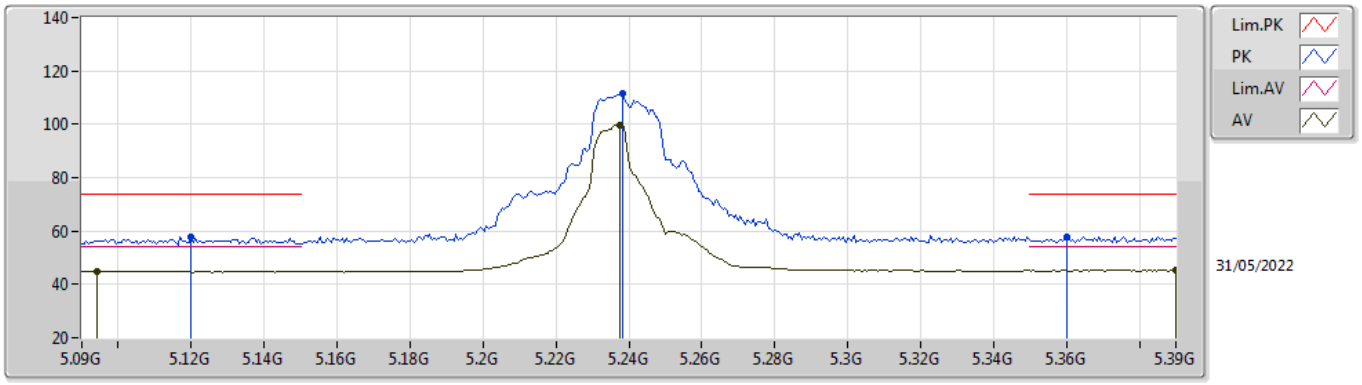


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.12G	57.82	74.00	-16.18	52.05	3	Horizontal	127	1.80	-	33.94	7.16	35.33
AV	5.0942G	44.77	54.00	-9.23	39.06	3	Horizontal	127	1.80	-	33.89	7.15	35.33
PK	5.2382G	111.34	Inf	-Inf	105.13	3	Horizontal	127	1.80	-	34.35	7.20	35.34
AV	5.2376G	99.87	Inf	-Inf	93.66	3	Horizontal	127	1.80	-	34.35	7.20	35.34
PK	5.36G	57.83	74.00	-16.17	51.45	3	Horizontal	127	1.80	-	34.52	7.20	35.34
AV	5.39G	45.17	54.00	-8.83	38.74	3	Horizontal	127	1.80	-	34.58	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

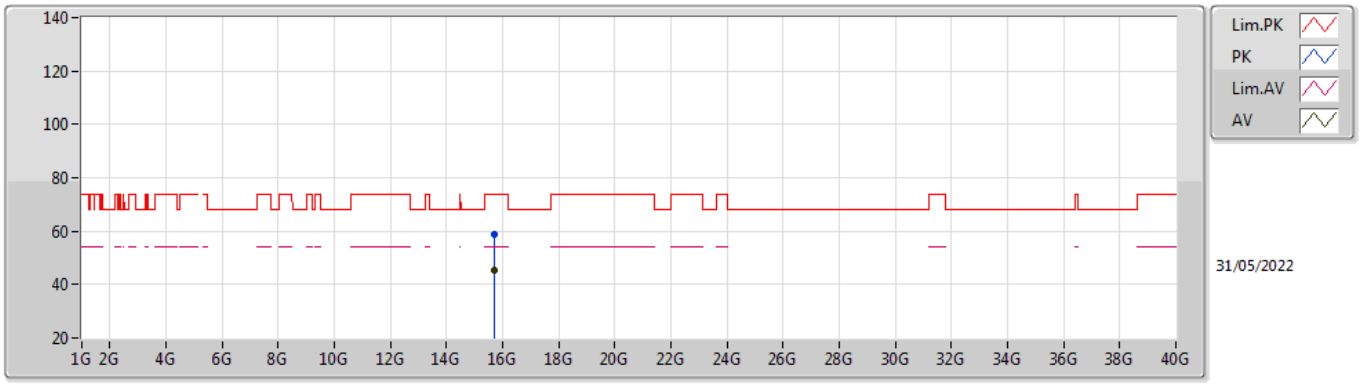


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7084G	59.00	74.00	-15.00	43.77	3	Vertical	157	2.25	-	37.53	13.25	35.55
AV	15.7074G	45.52	54.00	-8.48	30.28	3	Vertical	157	2.25	-	37.53	13.25	35.54

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

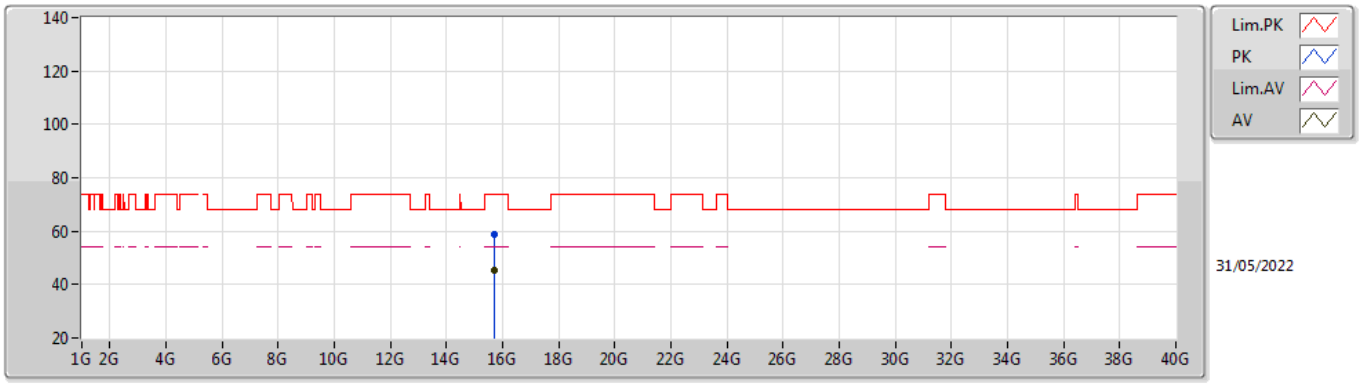


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7018G	58.93	74.00	-15.07	43.71	3	Horizontal	271	1.80	-	37.51	13.25	35.54
AV	15.7076G	45.38	54.00	-8.62	30.14	3	Horizontal	271	1.80	-	37.53	13.25	35.54

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

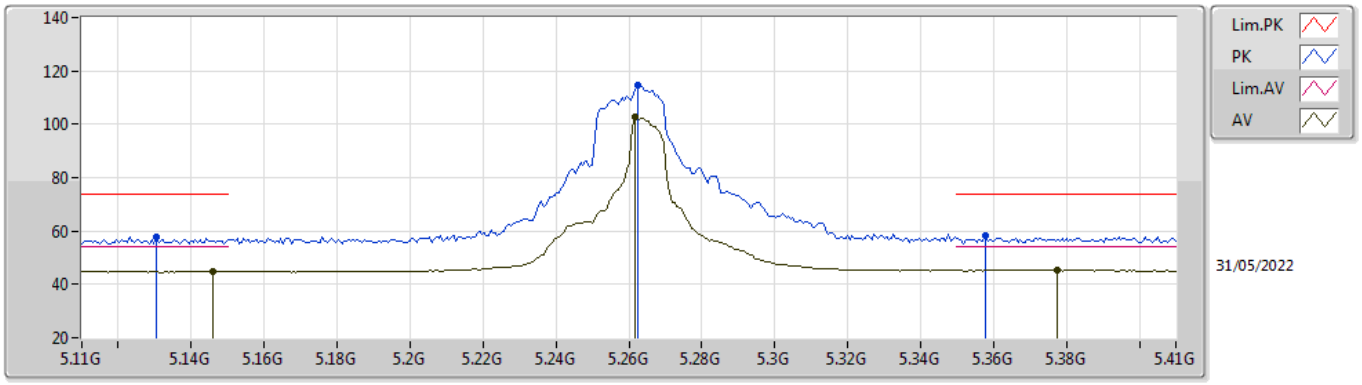


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1304G	57.96	74.00	-16.04	52.17	3	Vertical	139	1.80	-	33.96	7.17	35.34
AV	5.146G	44.71	54.00	-9.29	38.89	3	Vertical	139	1.80	-	33.99	7.17	35.34
PK	5.2624G	114.59	Inf	-Inf	108.31	3	Vertical	139	1.80	-	34.42	7.20	35.34
AV	5.2618G	102.59	Inf	-Inf	96.31	3	Vertical	139	1.80	-	34.42	7.20	35.34
PK	5.3578G	58.25	74.00	-15.75	51.87	3	Vertical	139	1.80	-	34.52	7.20	35.34
AV	5.3776G	45.29	54.00	-8.71	38.88	3	Vertical	139	1.80	-	34.56	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

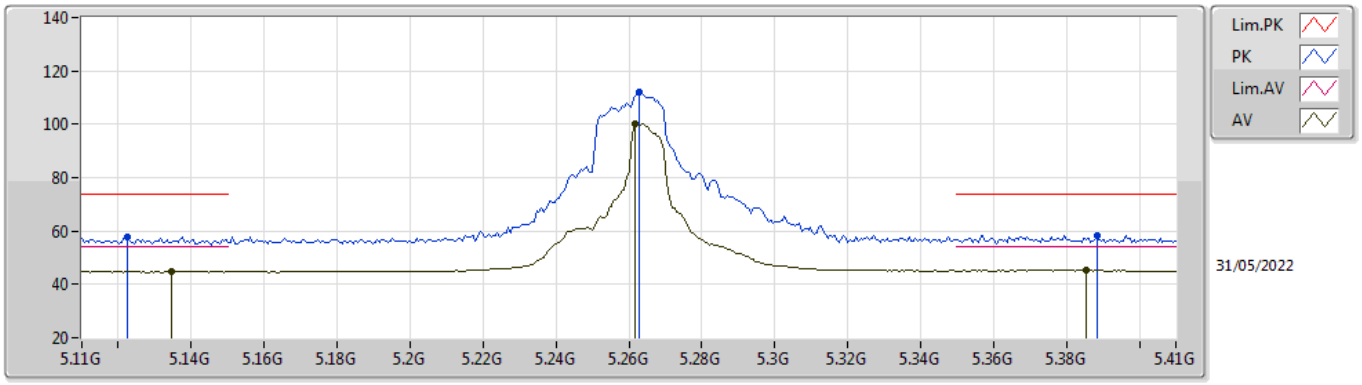


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1226G	57.70	74.00	-16.30	51.92	3	Horizontal	122	1.89	-	33.95	7.16	35.33
AV	5.1346G	44.73	54.00	-9.27	38.93	3	Horizontal	122	1.89	-	33.97	7.17	35.34
PK	5.263G	112.06	Inf	-Inf	105.77	3	Horizontal	122	1.89	-	34.43	7.20	35.34
AV	5.2618G	100.02	Inf	-Inf	93.74	3	Horizontal	122	1.89	-	34.42	7.20	35.34
PK	5.3884G	58.31	74.00	-15.69	51.88	3	Horizontal	122	1.89	-	34.58	7.20	35.35
AV	5.3854G	45.21	54.00	-8.79	38.79	3	Horizontal	122	1.89	-	34.57	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

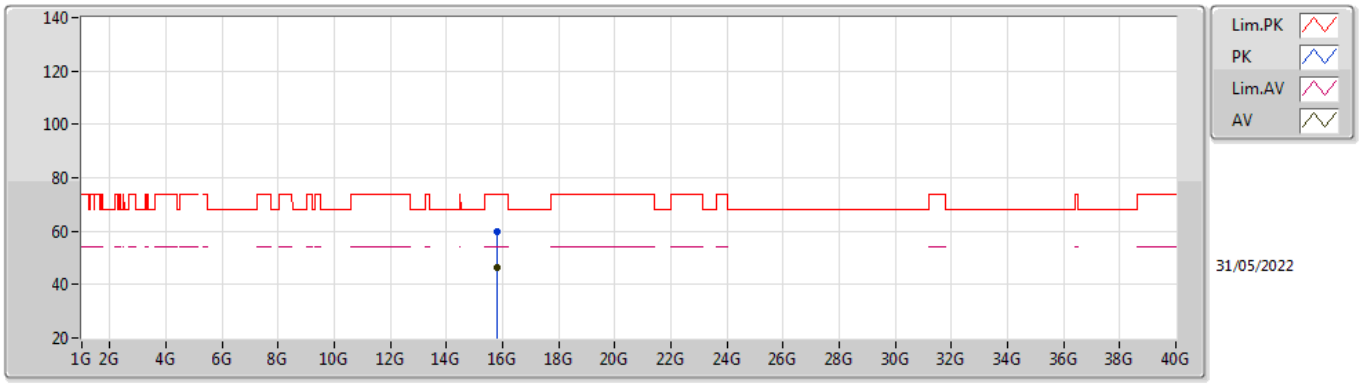


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7896G	59.90	74.00	-14.10	44.36	3	Vertical	158	2.33	-	37.86	13.29	35.61
AV	15.7906G	46.18	54.00	-7.82	30.63	3	Vertical	158	2.33	-	37.86	13.30	35.61

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

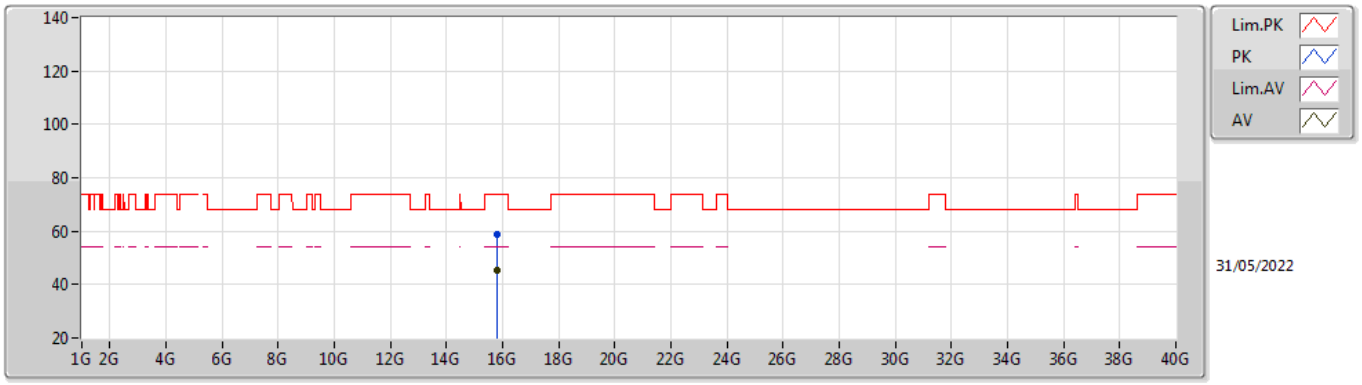


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7892G	58.69	74.00	-15.31	43.15	3	Horizontal	273	1.78	-	37.86	13.29	35.61
AV	15.7894G	45.58	54.00	-8.42	30.04	3	Horizontal	273	1.78	-	37.86	13.29	35.61

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

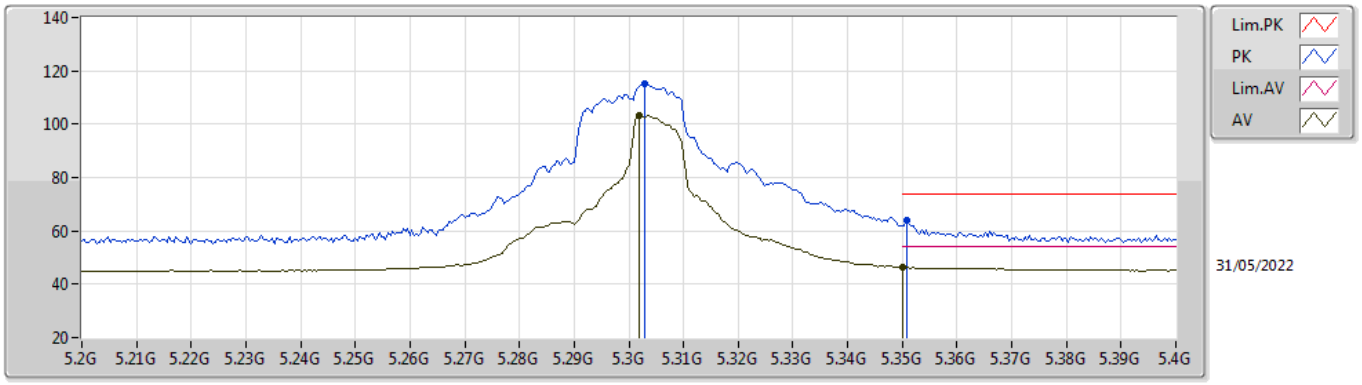


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3028G	115.30	Inf	-Inf	108.94	3	Vertical	139	1.80	-	34.50	7.20	35.34
AV	5.302G	103.13	Inf	-Inf	96.77	3	Vertical	139	1.80	-	34.50	7.20	35.34
PK	5.3508G	63.78	74.00	-10.22	57.42	3	Vertical	139	1.80	-	34.50	7.20	35.34
AV	5.35G	46.25	54.00	-7.75	39.89	3	Vertical	139	1.80	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

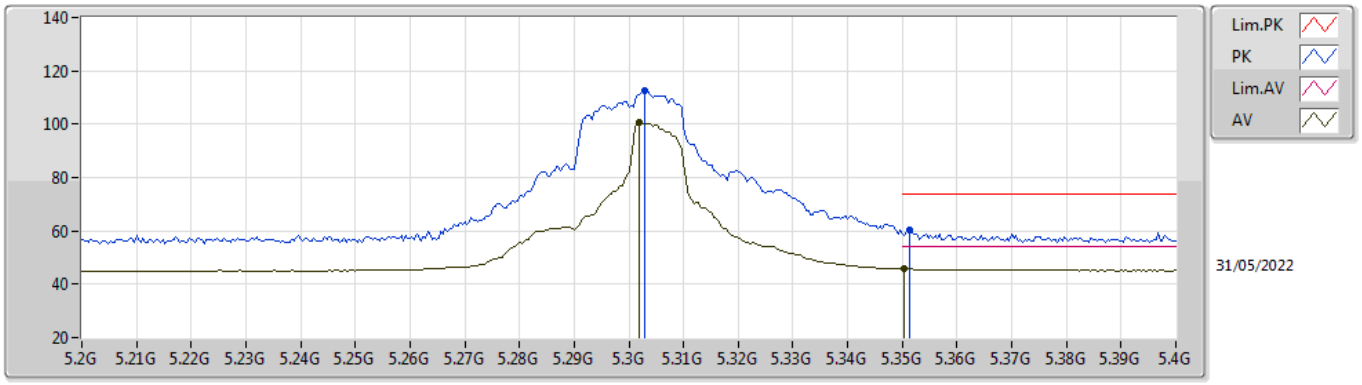


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3028G	112.60	Inf	-Inf	106.24	3	Horizontal	128	1.80	-	34.50	7.20	35.34
AV	5.302G	100.55	Inf	-Inf	94.19	3	Horizontal	128	1.80	-	34.50	7.20	35.34
PK	5.3512G	60.28	74.00	-13.72	53.92	3	Horizontal	128	1.80	-	34.50	7.20	35.34
AV	5.3504G	45.82	54.00	-8.18	39.46	3	Horizontal	128	1.80	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

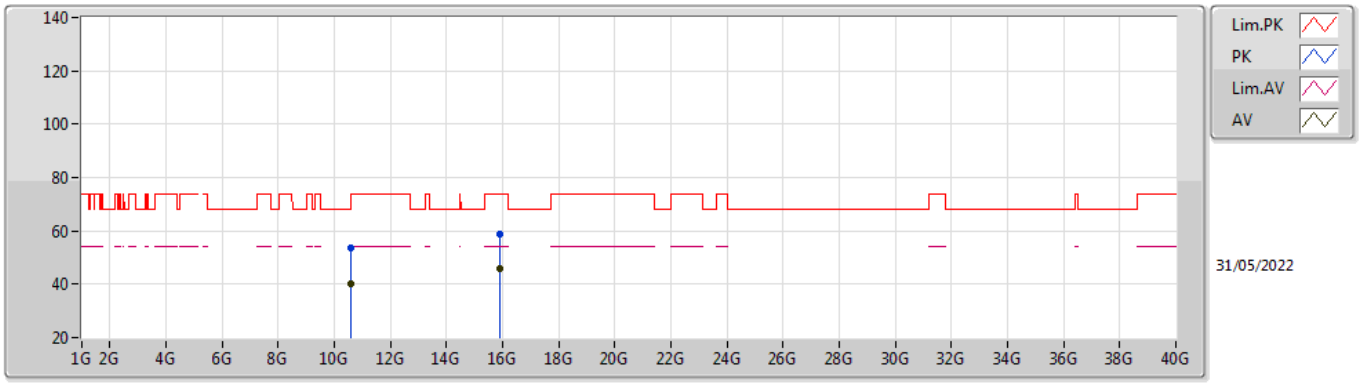


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6082G	53.43	74.00	-20.57	40.00	3	Vertical	203	1.80	-	38.22	10.59	35.38
AV	10.6086G	40.43	54.00	-13.57	27.00	3	Vertical	203	1.80	-	38.22	10.59	35.38
PK	15.9114G	58.94	74.00	-15.06	43.72	3	Vertical	184	1.90	-	37.58	13.36	35.72
AV	15.911G	45.67	54.00	-8.33	30.45	3	Vertical	184	1.90	-	37.58	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

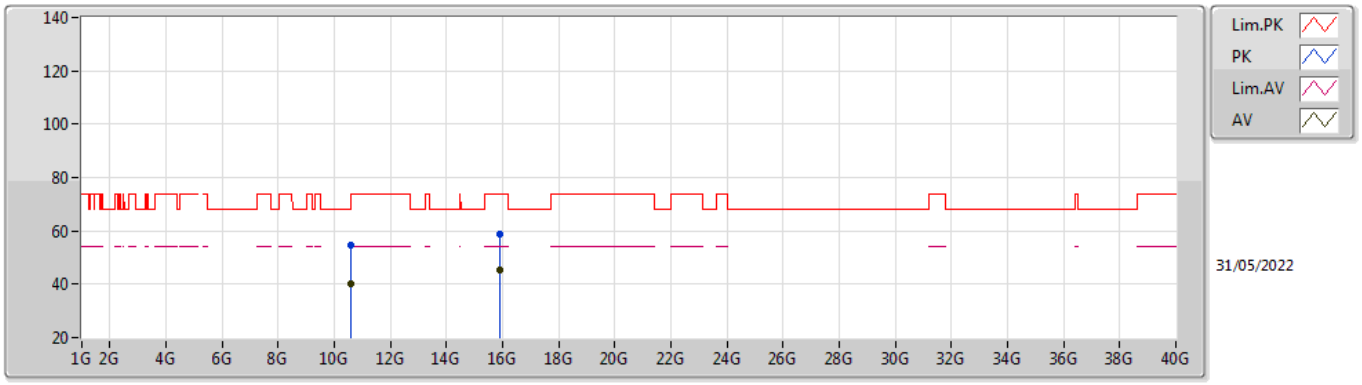


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6042G	54.62	74.00	-19.38	41.20	3	Horizontal	100	1.80	-	38.21	10.59	35.38
AV	10.6088G	40.26	54.00	-13.74	26.83	3	Horizontal	100	1.80	-	38.22	10.59	35.38
PK	15.9046G	58.95	74.00	-15.05	43.72	3	Horizontal	273	1.80	-	37.59	13.35	35.71
AV	15.9134G	45.22	54.00	-8.78	30.01	3	Horizontal	273	1.80	-	37.57	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

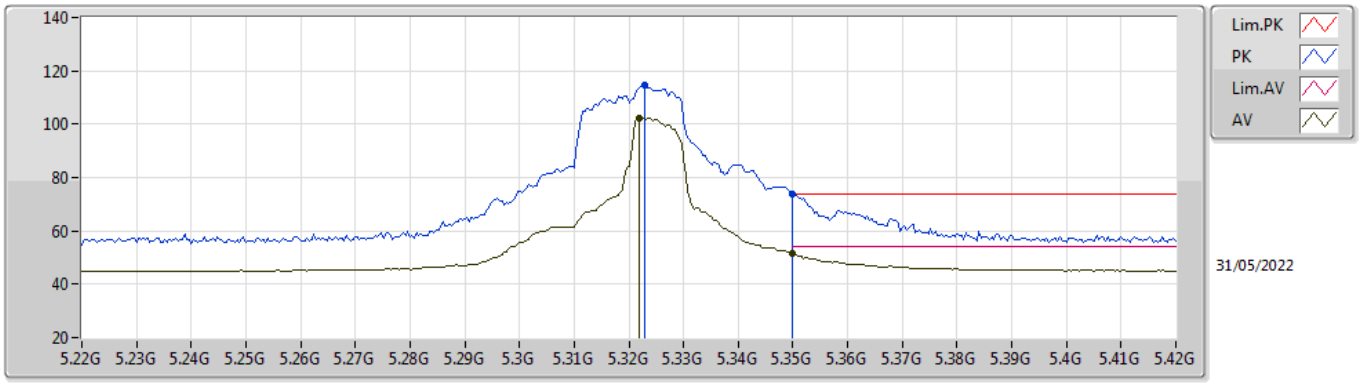


EUT Z_1TX
Setting 19
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3228G	114.55	Inf	-Inf	108.19	3	Vertical	138	1.90	-	34.50	7.20	35.34
AV	5.322G	102.49	Inf	-Inf	96.13	3	Vertical	138	1.90	-	34.50	7.20	35.34
PK	5.35G	73.92	74.00	-0.08	67.56	3	Vertical	138	1.90	-	34.50	7.20	35.34
AV	5.35G	51.43	54.00	-2.57	45.07	3	Vertical	138	1.90	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

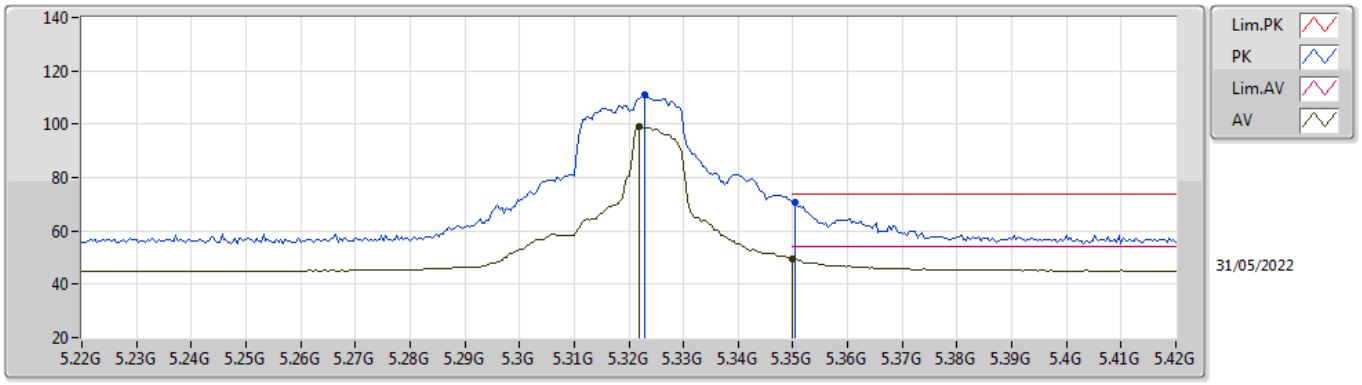


EUT Z_1TX
Setting 19
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3228G	110.96	Inf	-Inf	104.60	3	Horizontal	129	1.80	-	34.50	7.20	35.34
AV	5.322G	98.95	Inf	-Inf	92.59	3	Horizontal	129	1.80	-	34.50	7.20	35.34
PK	5.3504G	70.75	74.00	-3.25	64.39	3	Horizontal	129	1.80	-	34.50	7.20	35.34
AV	5.35G	49.41	54.00	-4.59	43.05	3	Horizontal	129	1.80	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

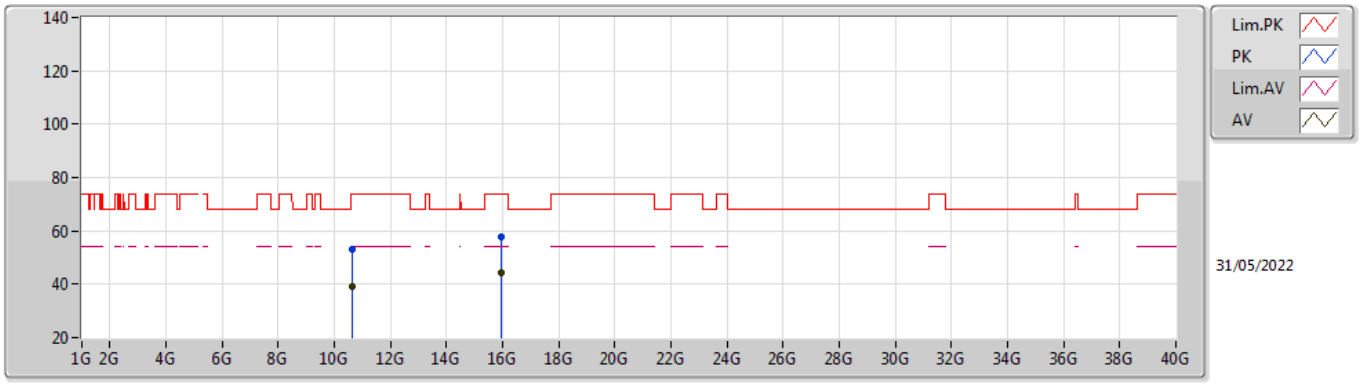


EUT X_1TX
Setting 19
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6263G	53.01	74.00	-20.99	39.53	3	Vertical	304	2.50	-	38.25	10.59	35.36
AV	10.6254G	39.35	54.00	-14.65	25.87	3	Vertical	304	2.50	-	38.25	10.59	35.36
PK	15.9616G	57.75	74.00	-16.25	42.65	3	Vertical	9	2.54	-	37.48	13.38	35.76
AV	15.9355G	44.15	54.00	-9.85	28.99	3	Vertical	9	2.54	-	37.53	13.37	35.74

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

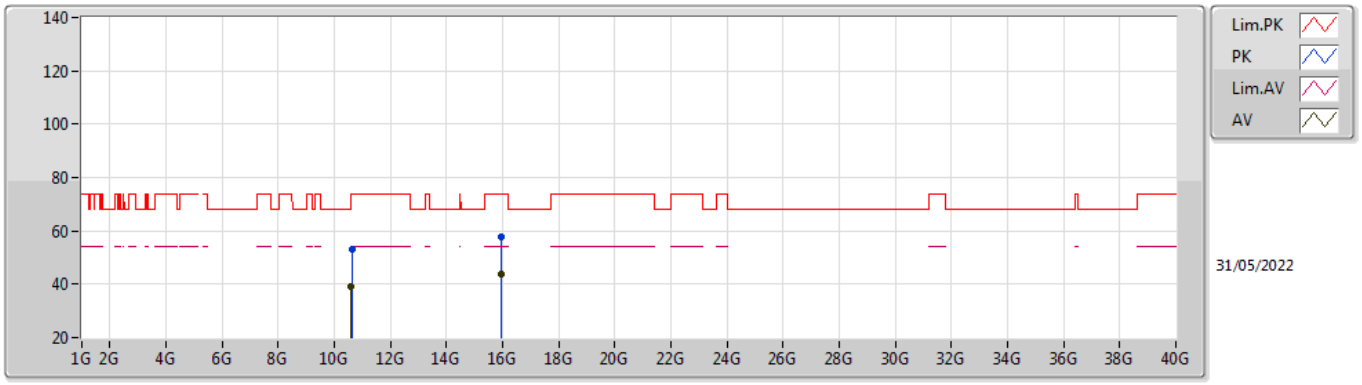


EUT X_1TX
Setting 19
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6186G	52.99	74.00	-21.01	39.53	3	Horizontal	202	1.22	-	38.24	10.59	35.37
AV	10.6129G	39.36	54.00	-14.64	25.91	3	Horizontal	202	1.22	-	38.23	10.59	35.37
PK	15.9704G	57.89	74.00	-16.11	42.81	3	Horizontal	67	2.47	-	37.46	13.39	35.77
AV	15.9637G	44.04	54.00	-9.96	28.95	3	Horizontal	67	2.47	-	37.47	13.38	35.76

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

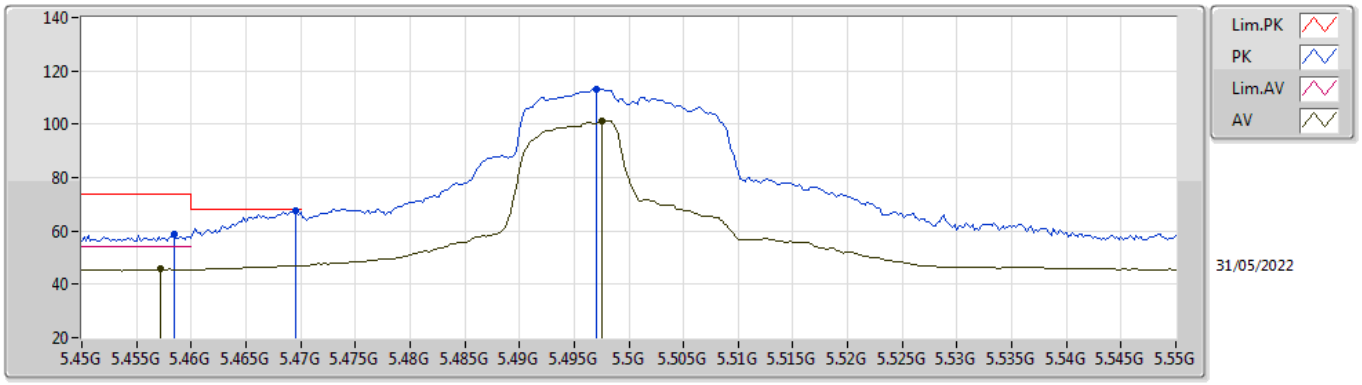


EUT Z_1TX
Setting 18.75
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4584G	58.77	74.00	-15.23	52.34	3	Vertical	132	1.95	-	34.52	7.26	35.35
AV	5.4572G	45.69	54.00	-8.31	39.27	3	Vertical	132	1.95	-	34.51	7.26	35.35
PK	5.4696G	67.83	68.20	-0.37	61.37	3	Vertical	132	1.95	-	34.54	7.27	35.35
PK	5.497G	113.31	Inf	-Inf	106.77	3	Vertical	132	1.95	-	34.59	7.30	35.35
AV	5.4976G	101.38	Inf	-Inf	94.83	3	Vertical	132	1.95	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

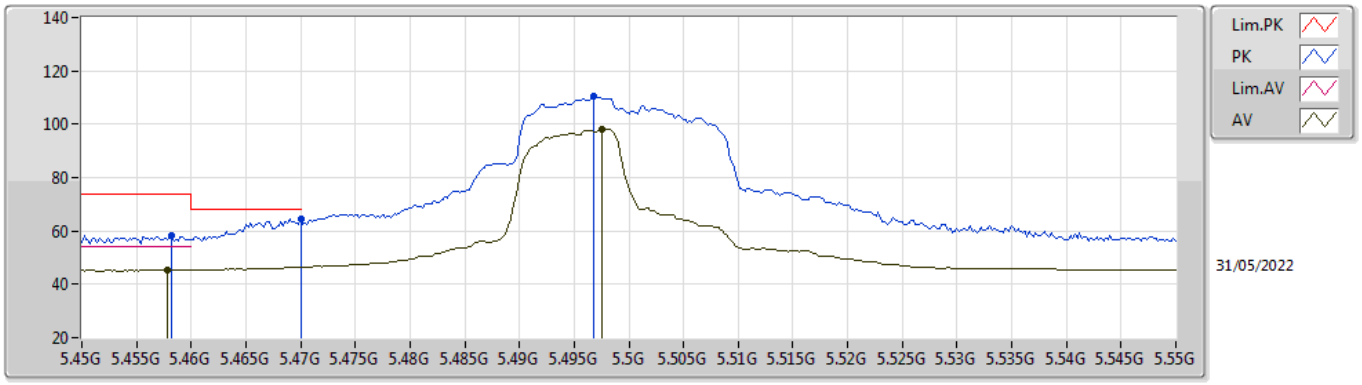


EUT Z_1TX
Setting 18.75
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4582G	58.39	74.00	-15.61	51.96	3	Horizontal	129	1.87	-	34.52	7.26	35.35
AV	5.4578G	45.42	54.00	-8.58	38.99	3	Horizontal	129	1.87	-	34.52	7.26	35.35
PK	5.47G	64.70	68.20	-3.50	58.24	3	Horizontal	129	1.87	-	34.54	7.27	35.35
PK	5.4968G	110.30	Inf	-Inf	103.76	3	Horizontal	129	1.87	-	34.59	7.30	35.35
AV	5.4976G	98.36	Inf	-Inf	91.81	3	Horizontal	129	1.87	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

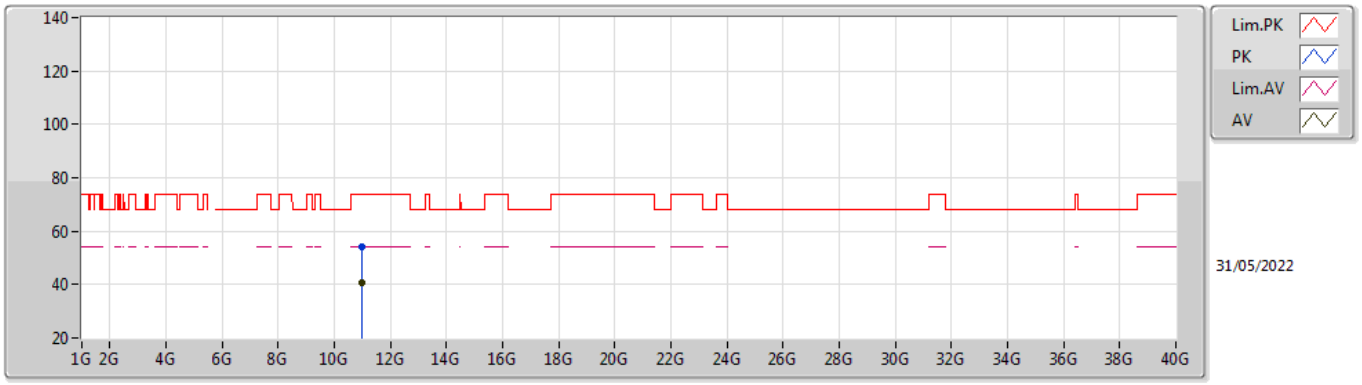


EUT X_1TX
Setting 18.75
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11G	53.93	74.00	-20.07	39.92	3	Vertical	339	1.51	-	38.40	10.65	35.04
AV	10.9948G	40.63	54.00	-13.37	26.63	3	Vertical	339	1.51	-	38.39	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

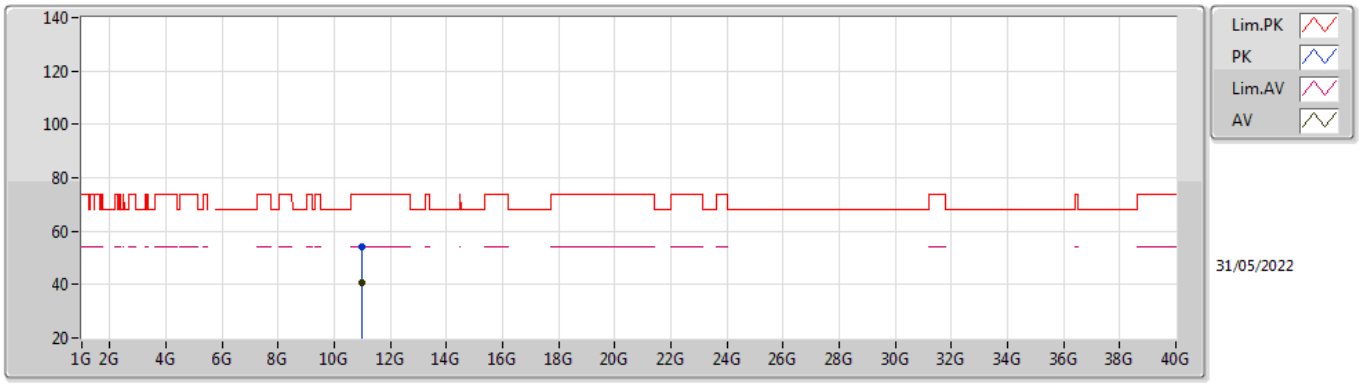


EUT X_1TX
Setting 18.75
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0005G	54.06	74.00	-19.94	40.05	3	Horizontal	282	2.46	-	38.40	10.65	35.04
AV	10.9889G	40.64	54.00	-13.36	26.65	3	Horizontal	282	2.46	-	38.39	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

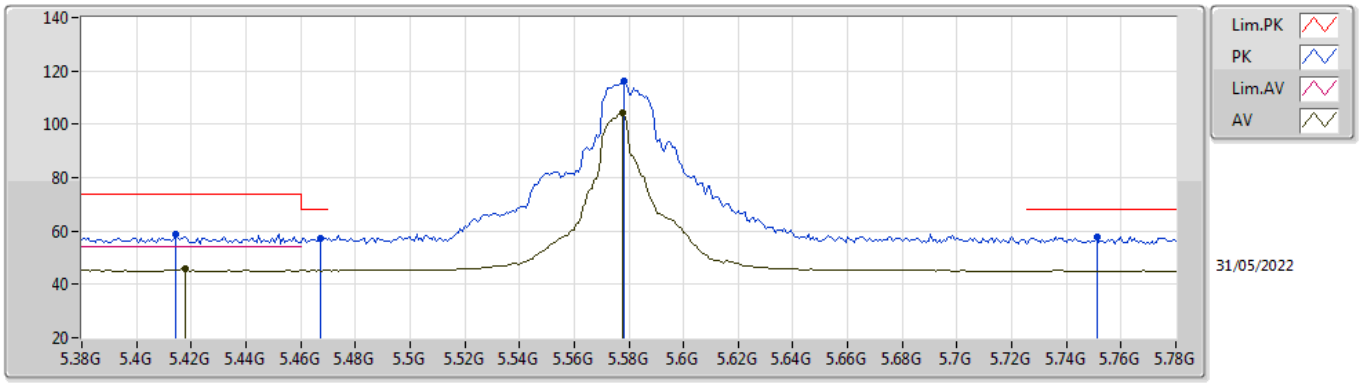


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4144G	58.71	74.00	-15.29	52.28	3	Vertical	169	2.01	-	34.57	7.21	35.35
AV	5.4176G	45.68	54.00	-8.32	39.25	3	Vertical	169	2.01	-	34.56	7.22	35.35
PK	5.4672G	57.25	68.20	-10.95	50.80	3	Vertical	169	2.01	-	34.53	7.27	35.35
PK	5.5784G	116.03	Inf	-Inf	109.44	3	Vertical	169	2.01	-	34.60	7.38	35.39
AV	5.5776G	104.49	Inf	-Inf	97.90	3	Vertical	169	2.01	-	34.60	7.38	35.39
PK	5.7512G	57.70	68.20	-10.50	51.58	3	Vertical	169	2.01	-	34.20	7.40	35.48

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

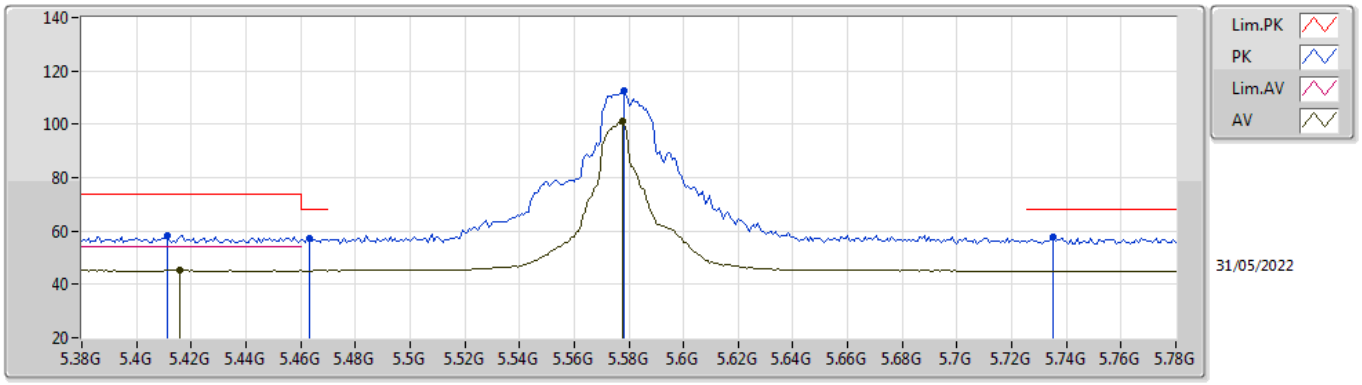


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4112G	58.52	74.00	-15.48	52.08	3	Horizontal	130	1.68	-	34.58	7.21	35.35
AV	5.416G	45.53	54.00	-8.47	39.09	3	Horizontal	130	1.68	-	34.57	7.22	35.35
PK	5.4632G	57.36	68.20	-10.84	50.92	3	Horizontal	130	1.68	-	34.53	7.26	35.35
PK	5.5784G	112.38	Inf	-Inf	105.79	3	Horizontal	130	1.68	-	34.60	7.38	35.39
AV	5.5776G	101.01	Inf	-Inf	94.42	3	Horizontal	130	1.68	-	34.60	7.38	35.39
PK	5.7352G	57.68	68.20	-10.52	51.52	3	Horizontal	130	1.68	-	34.23	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

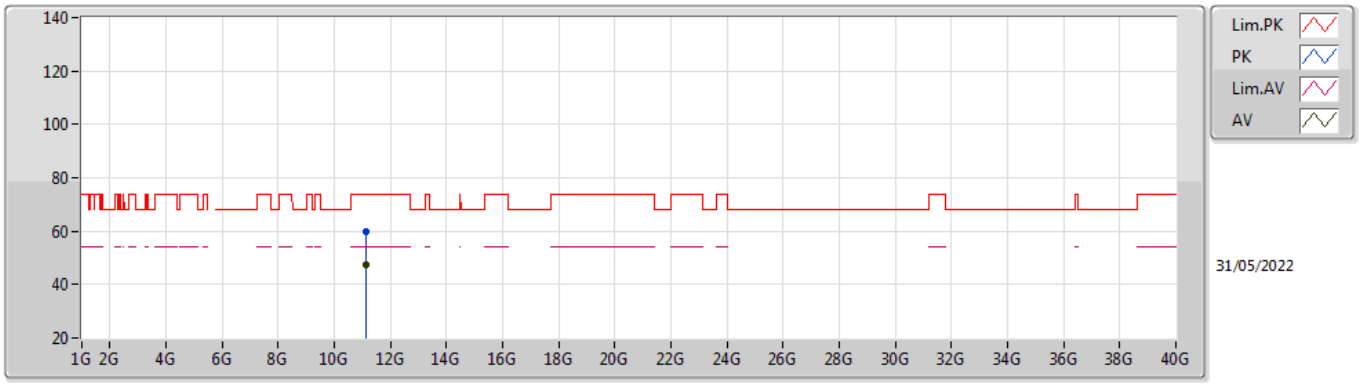


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.149G	59.68	74.00	-14.32	45.67	3	Vertical	171	2.91	-	38.55	10.67	35.21
AV	11.1512G	47.55	54.00	-6.45	33.54	3	Vertical	171	2.91	-	38.55	10.67	35.21

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

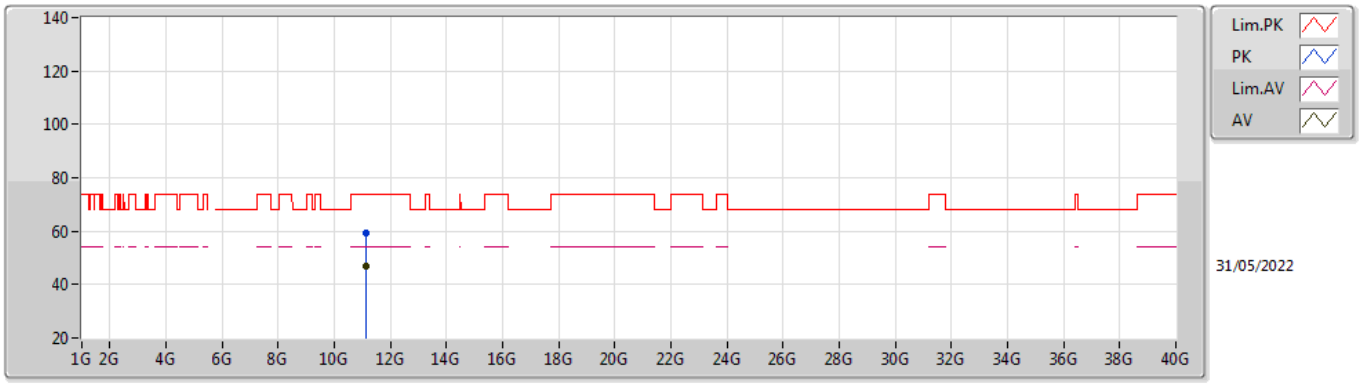


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.151G	59.13	74.00	-14.87	45.12	3	Horizontal	131	1.80	-	38.55	10.67	35.21
AV	11.1512G	47.10	54.00	-6.90	33.09	3	Horizontal	131	1.80	-	38.55	10.67	35.21

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

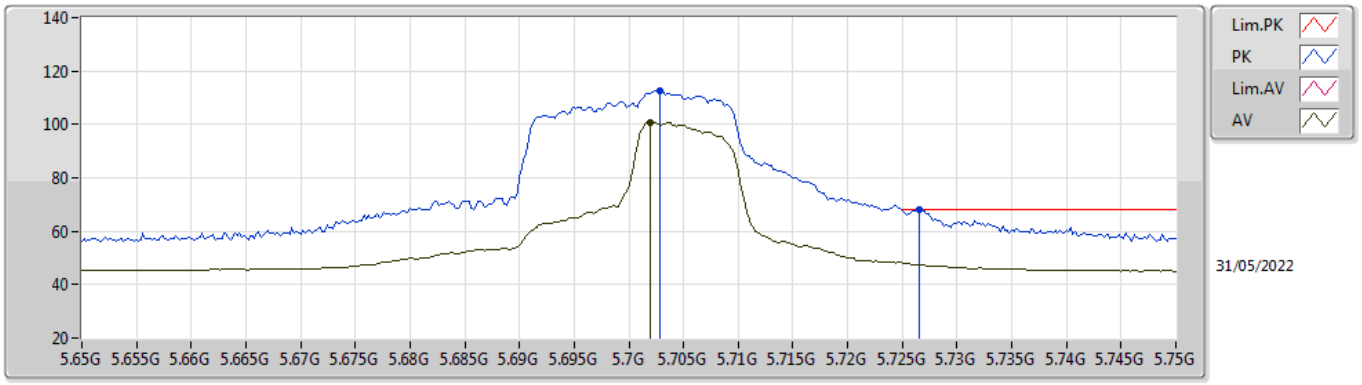


EUT Z_1TX
Setting 17.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7028G	112.73	Inf	-Inf	106.49	3	Vertical	130	1.77	-	34.29	7.40	35.45
AV	5.702G	100.70	Inf	-Inf	94.45	3	Vertical	130	1.77	-	34.30	7.40	35.45
PK	5.7266G	68.03	68.20	-0.17	61.84	3	Vertical	130	1.77	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

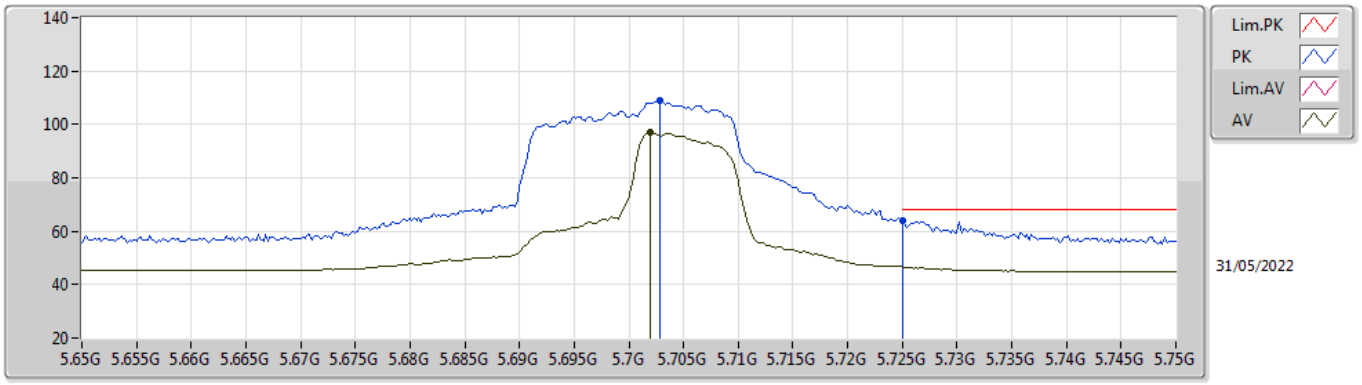


EUT Z_1TX
Setting 17.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7028G	108.76	Inf	-Inf	102.52	3	Horizontal	122	1.77	-	34.29	7.40	35.45
AV	5.702G	96.85	Inf	-Inf	90.60	3	Horizontal	122	1.77	-	34.30	7.40	35.45
PK	5.725G	63.71	68.20	-4.49	57.52	3	Horizontal	122	1.77	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

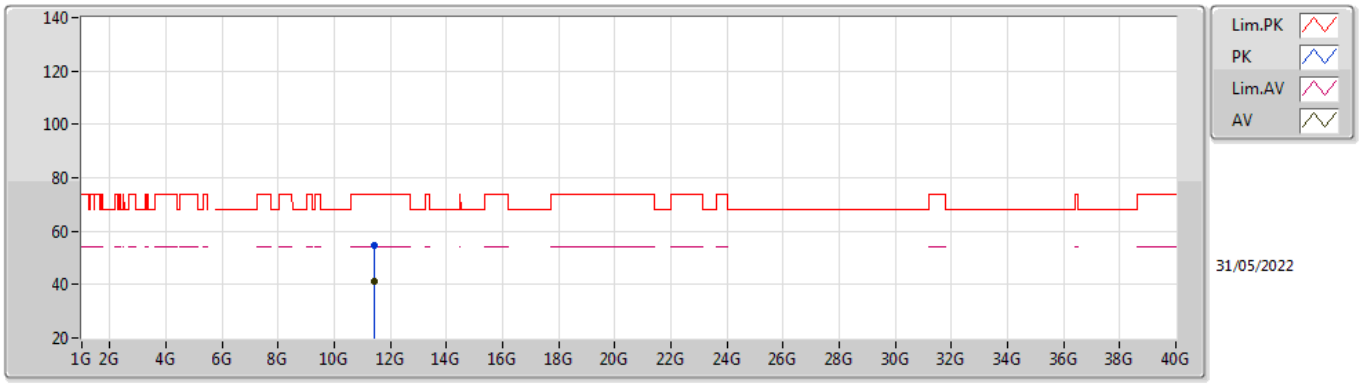


EUT X_1TX
Setting 17.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4062G	54.44	74.00	-19.56	40.41	3	Vertical	326	1.58	-	38.81	10.71	35.49
AV	11.4234G	41.11	54.00	-12.89	27.06	3	Vertical	326	1.58	-	38.85	10.71	35.51

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

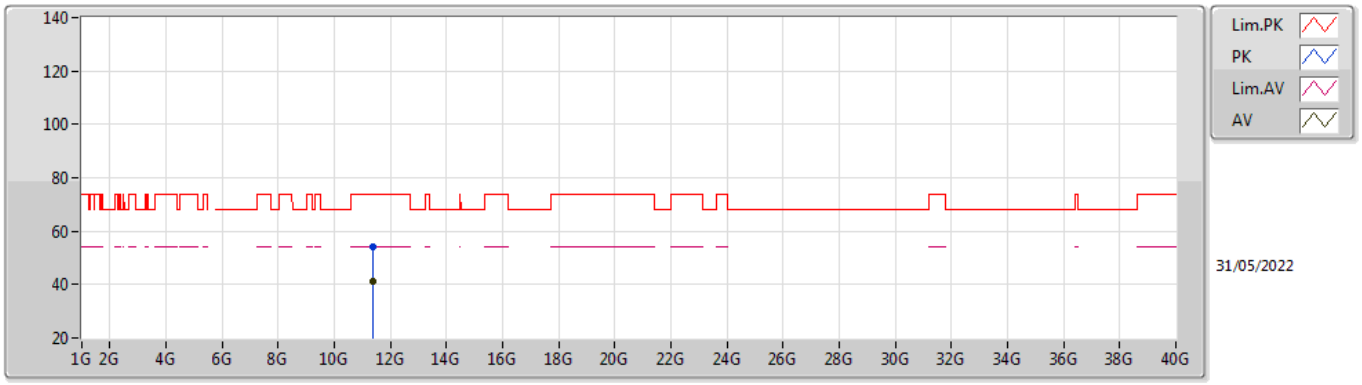


EUT X_1TX
Setting 17.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4012G	54.19	74.00	-19.81	40.17	3	Horizontal	347	1.27	-	38.80	10.71	35.49
AV	11.4012G	41.21	54.00	-12.79	27.19	3	Horizontal	347	1.27	-	38.80	10.71	35.49

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

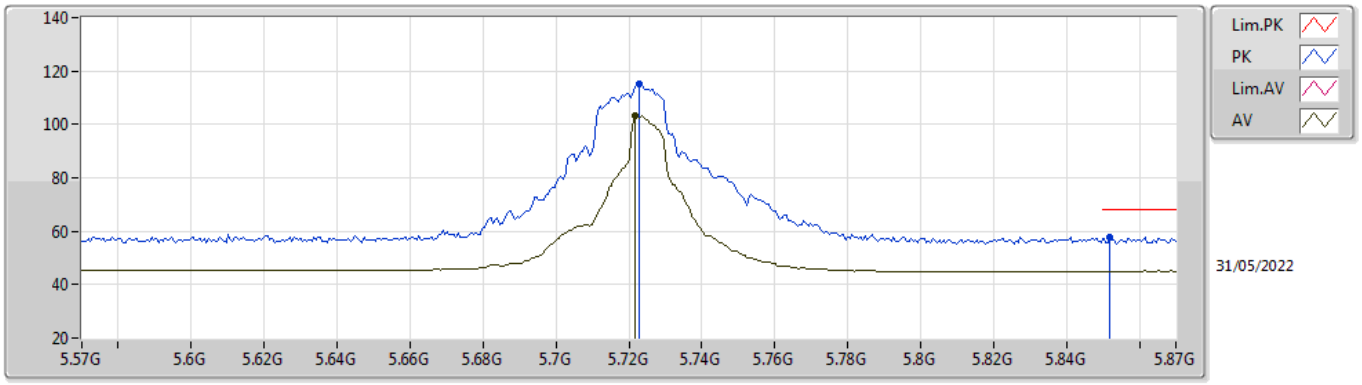


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.723G	115.34	Inf	-Inf	109.15	3	Vertical	134	1.80	-	34.25	7.40	35.46
AV	5.7218G	103.38	Inf	-Inf	97.18	3	Vertical	134	1.80	-	34.26	7.40	35.46
PK	5.852G	57.85	68.20	-10.35	51.62	3	Vertical	134	1.80	-	34.31	7.45	35.53

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

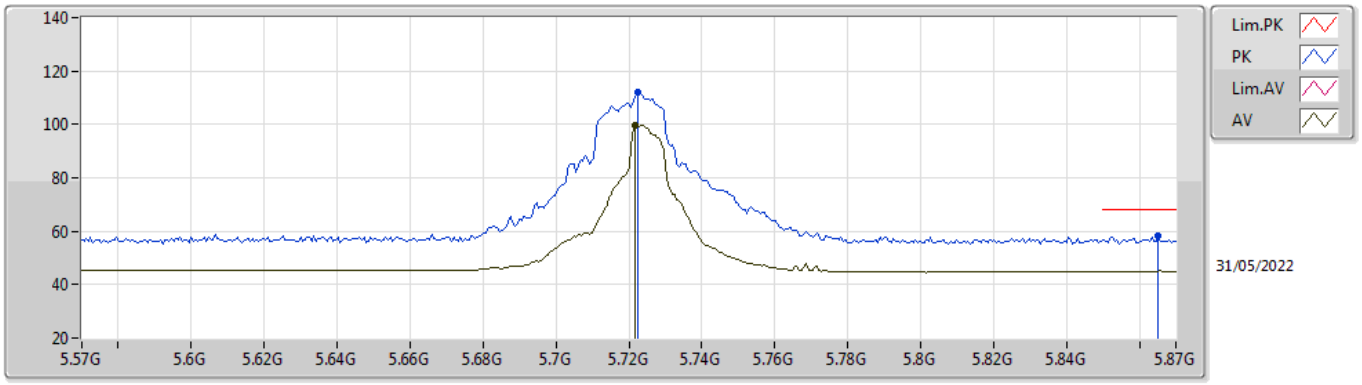


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7224G	111.84	Inf	-Inf	105.64	3	Horizontal	122	1.80	-	34.26	7.40	35.46
AV	5.7218G	99.86	Inf	-Inf	93.66	3	Horizontal	122	1.80	-	34.26	7.40	35.46
PK	5.8652G	58.14	68.20	-10.06	51.81	3	Horizontal	122	1.80	-	34.39	7.47	35.53

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

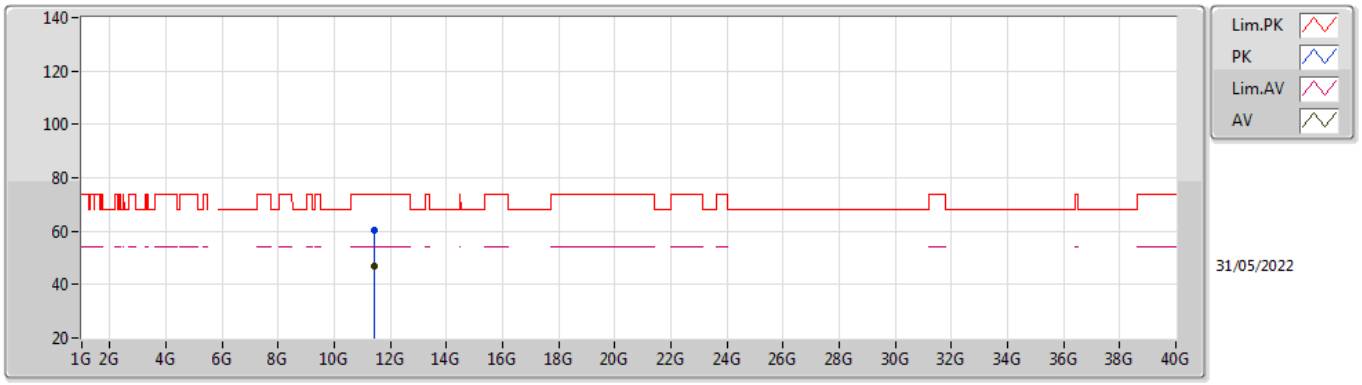


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4508G	60.59	74.00	-13.41	46.51	3	Vertical	159	3.00	-	38.90	10.72	35.54
AV	11.4462G	46.88	54.00	-7.12	32.81	3	Vertical	159	3.00	-	38.89	10.72	35.54

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

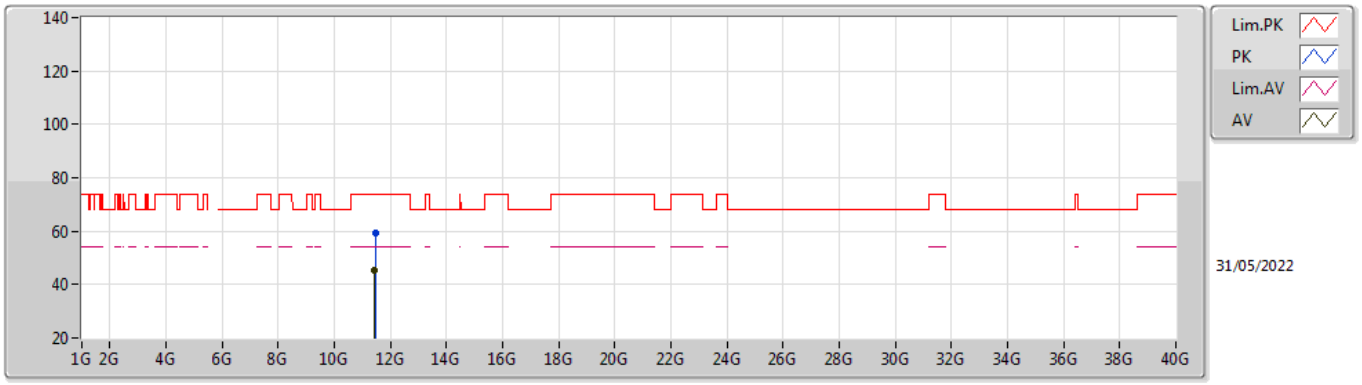


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.451G	59.22	74.00	-14.78	45.15	3	Horizontal	146	1.80	-	38.90	10.72	35.55
AV	11.4488G	45.25	54.00	-8.75	31.17	3	Horizontal	146	1.80	-	38.90	10.72	35.54

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

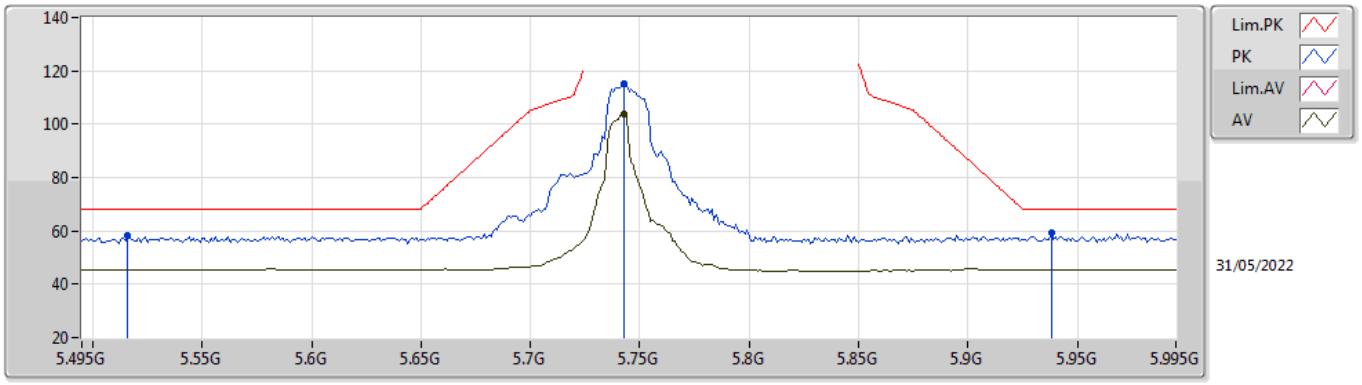


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.516G	58.40	68.20	-9.80	51.84	3	Vertical	132	1.83	-	34.60	7.32	35.36
PK	5.743G	115.35	Inf	-Inf	109.21	3	Vertical	132	1.83	-	34.21	7.40	35.47
AV	5.743G	103.83	Inf	-Inf	97.69	3	Vertical	132	1.83	-	34.21	7.40	35.47
PK	5.938G	59.14	68.20	-9.06	52.42	3	Vertical	132	1.83	-	34.75	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

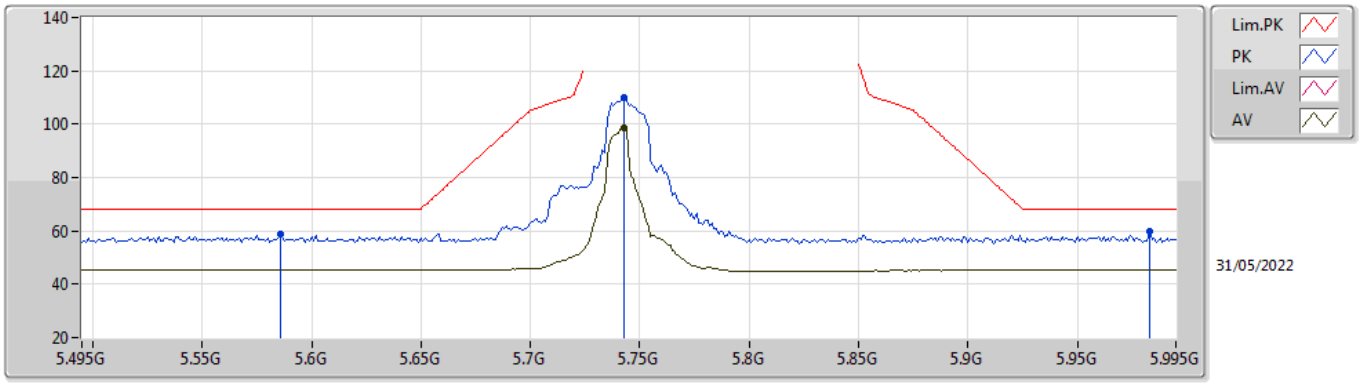


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.586G	58.58	68.20	-9.62	51.98	3	Horizontal	125	1.64	-	34.60	7.39	35.39
PK	5.743G	109.97	Inf	-Inf	103.83	3	Horizontal	125	1.64	-	34.21	7.40	35.47
AV	5.743G	98.63	Inf	-Inf	92.49	3	Horizontal	125	1.64	-	34.21	7.40	35.47
PK	5.983G	59.80	68.20	-8.40	53.01	3	Horizontal	125	1.64	-	34.80	7.58	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

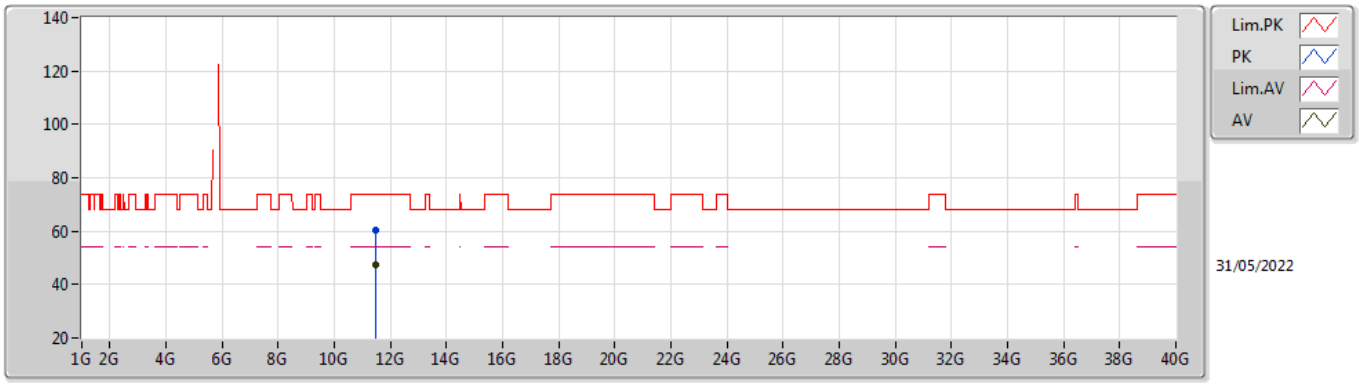


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4794G	60.48	74.00	-13.52	46.38	3	Vertical	158	2.98	-	38.96	10.72	35.58
AV	11.4812G	47.47	54.00	-6.53	33.37	3	Vertical	158	2.98	-	38.96	10.72	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

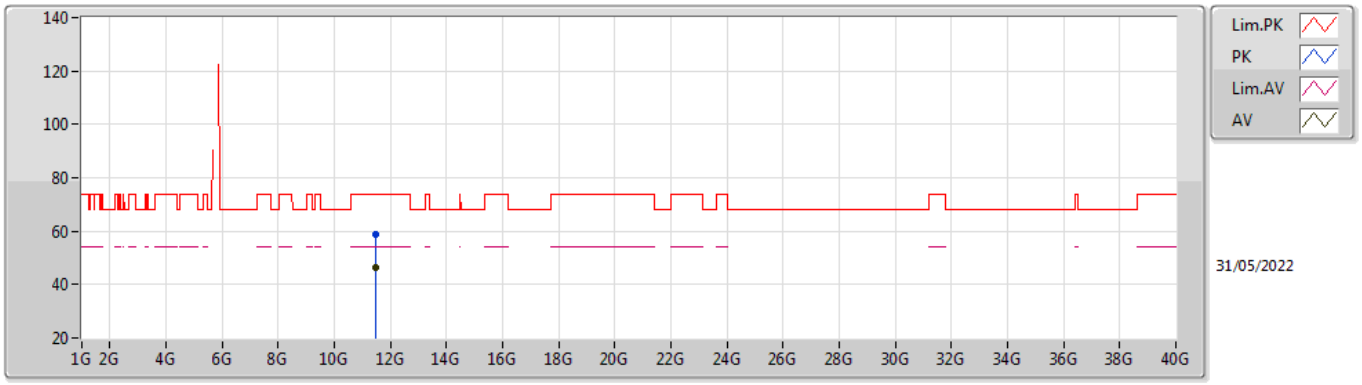


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4866G	58.71	74.00	-15.29	44.60	3	Horizontal	146	1.80	-	38.97	10.72	35.58
AV	11.4814G	46.30	54.00	-7.70	32.20	3	Horizontal	146	1.80	-	38.96	10.72	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

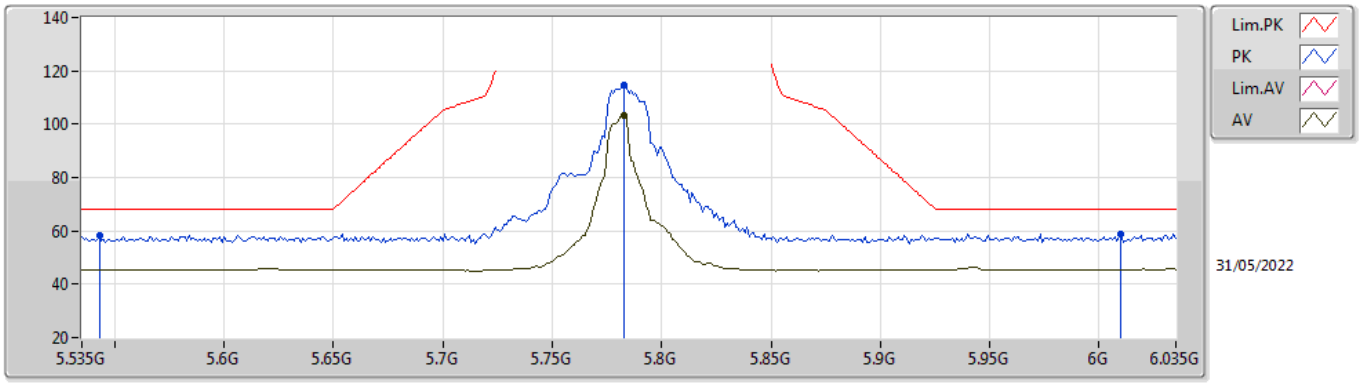


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.543G	58.37	68.20	-9.83	51.80	3	Vertical	134	1.80	-	34.60	7.34	35.37
PK	5.783G	114.81	Inf	-Inf	108.70	3	Vertical	134	1.80	-	34.20	7.40	35.49
AV	5.783G	103.31	Inf	-Inf	97.20	3	Vertical	134	1.80	-	34.20	7.40	35.49
PK	6.01G	58.82	68.20	-9.38	52.00	3	Vertical	134	1.80	-	34.82	7.60	35.60

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

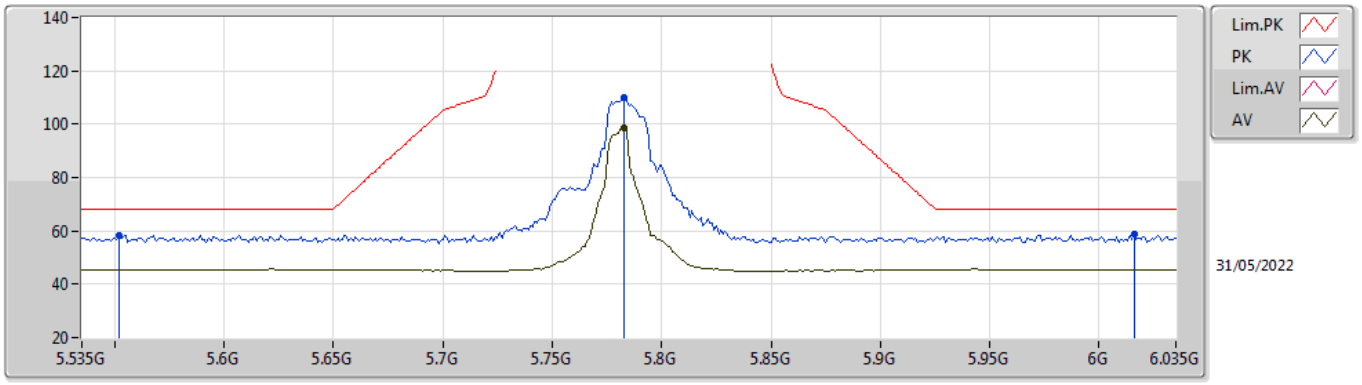


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.552G	58.37	68.20	-9.83	51.80	3	Horizontal	122	1.65	-	34.60	7.35	35.38
PK	5.783G	110.19	Inf	-Inf	104.08	3	Horizontal	122	1.65	-	34.20	7.40	35.49
AV	5.783G	98.77	Inf	-Inf	92.66	3	Horizontal	122	1.65	-	34.20	7.40	35.49
PK	6.016G	58.58	68.20	-9.62	51.73	3	Horizontal	122	1.65	-	34.83	7.61	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

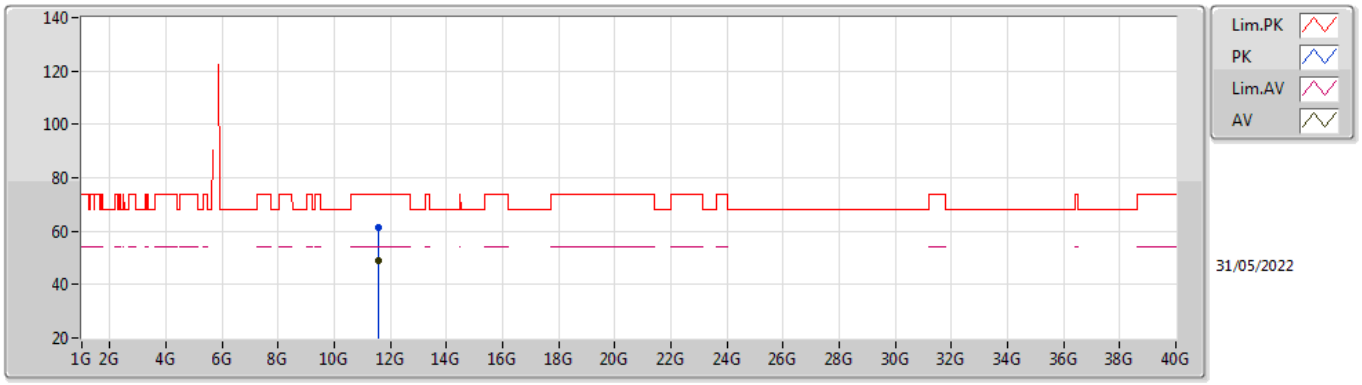


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5612G	61.24	74.00	-12.76	46.86	3	Vertical	158	3.00	-	39.24	10.73	35.59
AV	11.5614G	48.91	54.00	-5.09	34.52	3	Vertical	158	3.00	-	39.25	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

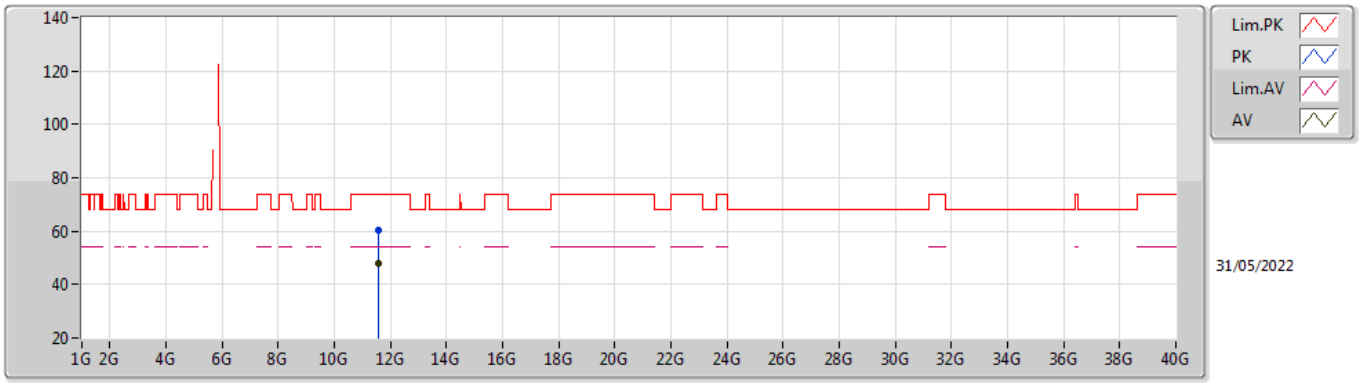


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5612G	60.45	74.00	-13.55	46.07	3	Horizontal	147	1.80	-	39.24	10.73	35.59
AV	11.5612G	48.01	54.00	-5.99	33.63	3	Horizontal	147	1.80	-	39.24	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

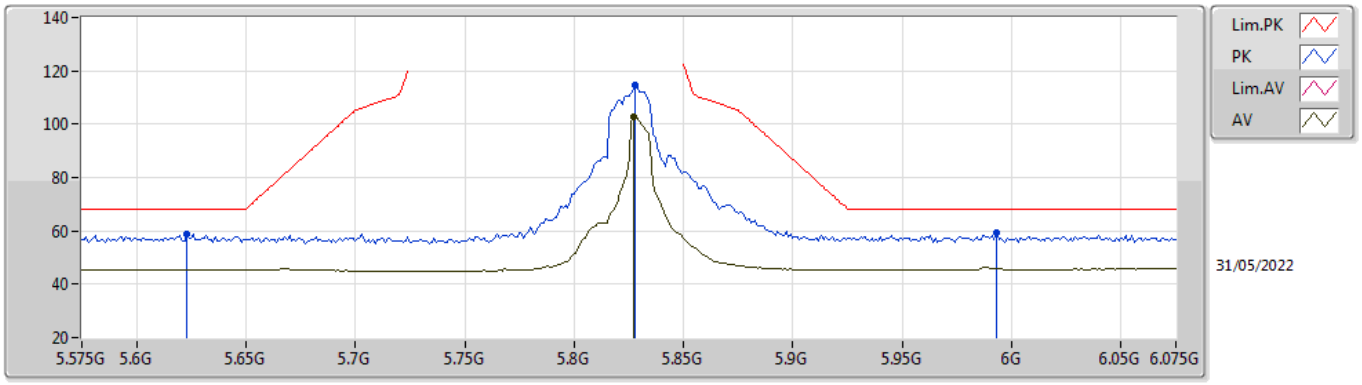


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.623G	58.92	68.20	-9.28	52.38	3	Vertical	133	1.80	-	34.55	7.40	35.41
PK	5.828G	114.62	Inf	-Inf	108.44	3	Vertical	133	1.80	-	34.26	7.43	35.51
AV	5.827G	102.58	Inf	-Inf	96.41	3	Vertical	133	1.80	-	34.25	7.43	35.51
PK	5.993G	59.49	68.20	-8.71	52.70	3	Vertical	133	1.80	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

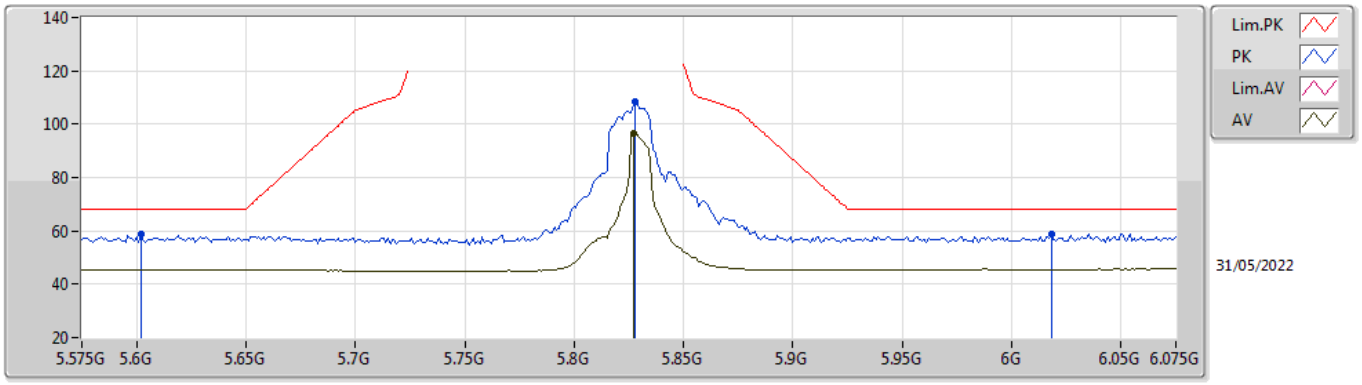


EUT Z_1TX
Setting 21.5
03-B-K-4-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.602G	58.69	68.20	-9.51	52.09	3	Horizontal	58	1.85	-	34.60	7.40	35.40
PK	5.828G	108.36	Inf	-Inf	102.18	3	Horizontal	58	1.85	-	34.26	7.43	35.51
AV	5.827G	96.59	Inf	-Inf	90.42	3	Horizontal	58	1.85	-	34.25	7.43	35.51
PK	6.018G	58.80	68.20	-9.40	51.94	3	Horizontal	58	1.85	-	34.84	7.61	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

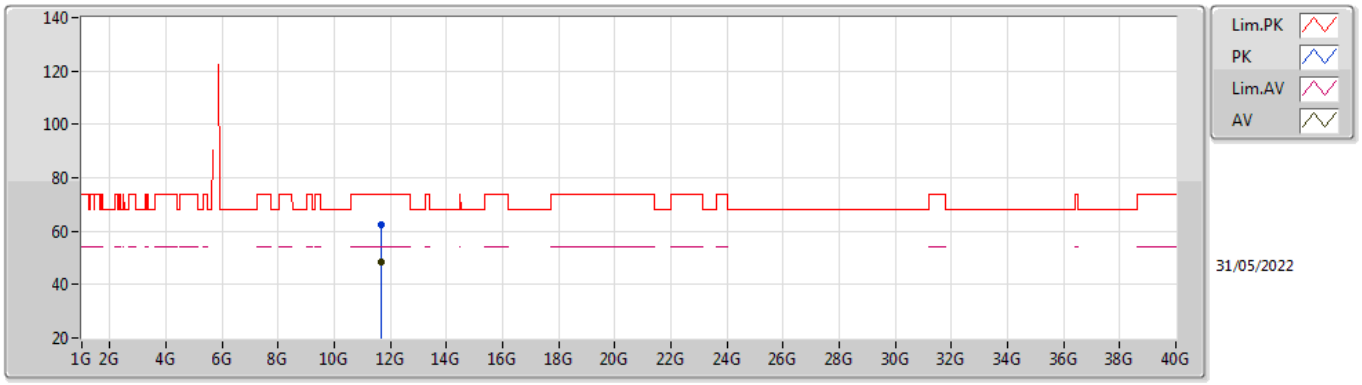


EUT X_1TX
Setting 21.5
03-B-K-4

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6588G	62.29	74.00	-11.71	47.71	3	Vertical	143	3.00	-	39.40	10.75	35.57
AV	11.6562G	48.70	54.00	-5.30	34.12	3	Vertical	143	3.00	-	39.40	10.75	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

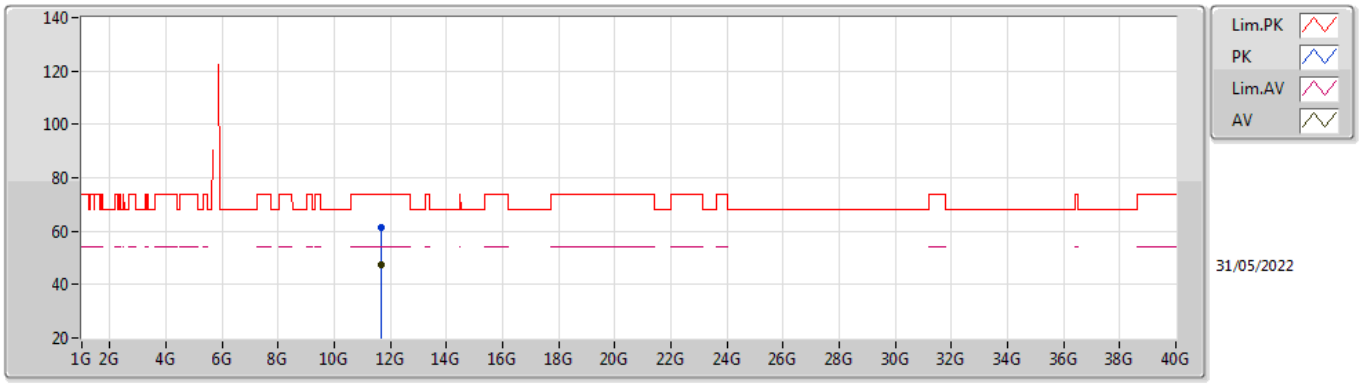

EUT X_1TX
Setting 21.5
03-B-K-4


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6612G	61.43	74.00	-12.57	46.84	3	Horizontal	149	1.79	-	39.40	10.75	35.56
AV	11.6562G	47.65	54.00	-6.35	33.07	3	Horizontal	149	1.79	-	39.40	10.75	35.57

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	AV	11.5531G	53.97	54.00	-0.03	3	Vertical	173	3.00	-

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

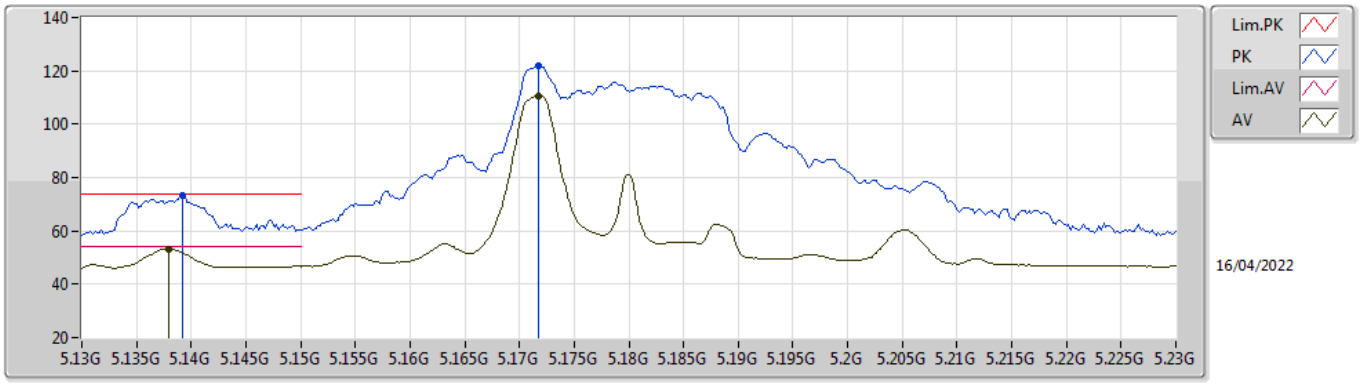


EUT X_1TX
Setting 20.25
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1392G	73.35	74.00	-0.65	67.54	3	Vertical	69	1.80	-	33.98	7.17	35.34
AV	5.138G	53.26	54.00	-0.74	47.45	3	Vertical	69	1.80	-	33.98	7.17	35.34
PK	5.1718G	121.98	Inf	-Inf	116.04	3	Vertical	69	1.80	-	34.09	7.19	35.34
AV	5.1718G	110.38	Inf	-Inf	104.44	3	Vertical	69	1.80	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

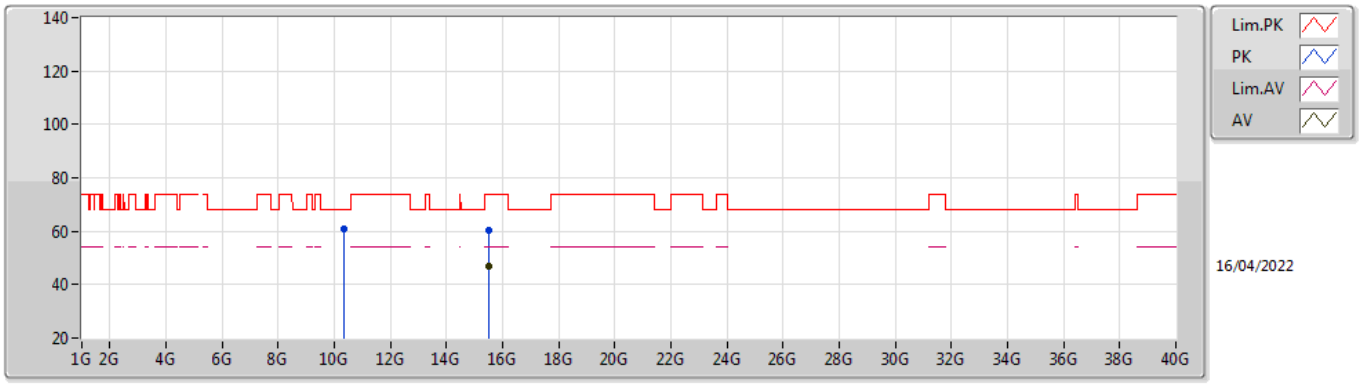


EUT X_1TX
Setting 20.25
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.344G	60.93	68.20	-7.27	47.83	3	Vertical	180	1.05	-	38.14	10.55	35.59
PK	15.53196G	60.52	74.00	-13.48	44.27	3	Vertical	103	2.63	-	38.48	13.17	35.40
AV	15.52752G	47.05	54.00	-6.95	30.77	3	Vertical	103	2.63	-	38.51	13.16	35.39

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

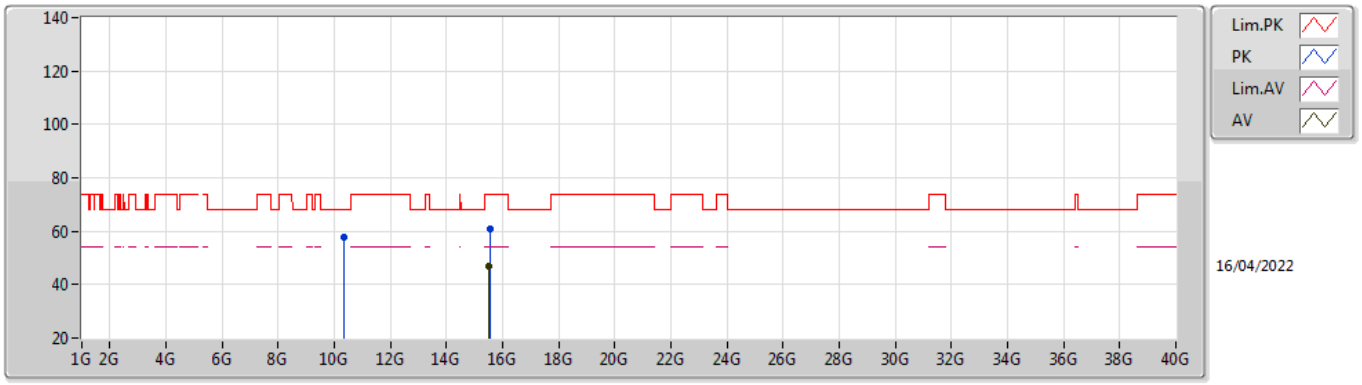


EUT X_1TX
Setting 20.25
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.3436G	57.62	68.20	-10.58	44.53	3	Horizontal	149	1.95	-	38.14	10.55	35.60
PK	15.54234G	60.98	74.00	-13.02	44.82	3	Horizontal	85	2.72	-	38.40	13.17	35.41
AV	15.52632G	47.00	54.00	-7.00	30.71	3	Horizontal	85	2.72	-	38.52	13.16	35.39

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

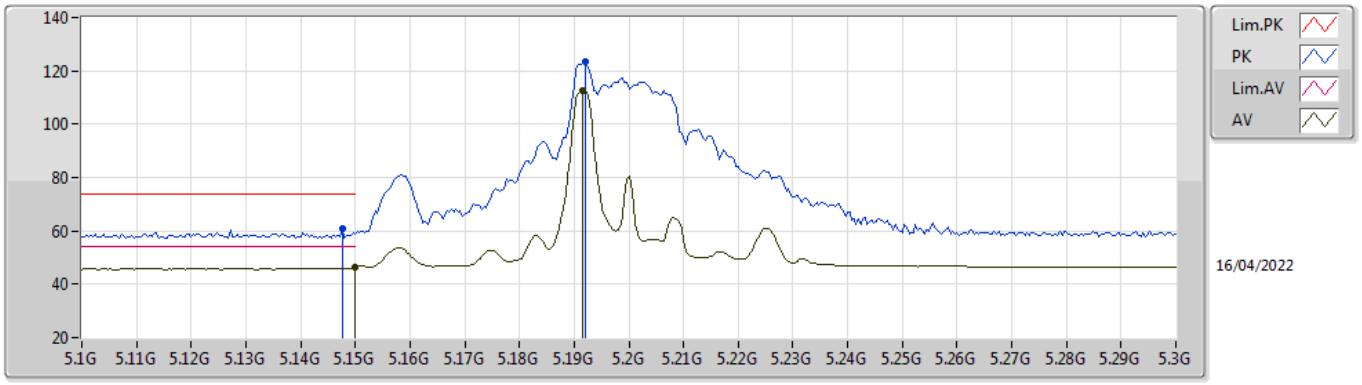


EUT X_1TX
Setting 21.5
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1476G	60.84	74.00	-13.16	55.01	3	Vertical	68	1.86	-	34.00	7.17	35.34
AV	5.15G	46.32	54.00	-7.68	40.49	3	Vertical	68	1.86	-	34.00	7.17	35.34
PK	5.192G	123.56	Inf	-Inf	117.53	3	Vertical	68	1.86	-	34.17	7.20	35.34
AV	5.1916G	112.66	Inf	-Inf	106.63	3	Vertical	68	1.86	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

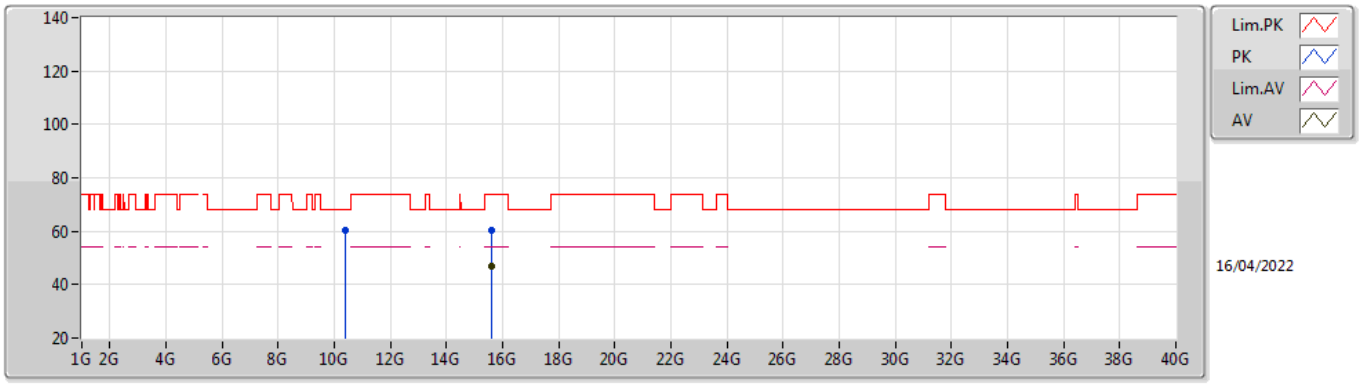


EUT X_1TX
Setting 21.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.3818G	60.45	68.20	-7.75	47.27	3	Vertical	180	1.10	-	38.18	10.56	35.56
PK	15.59394G	60.36	74.00	-13.64	44.57	3	Vertical	176	2.50	-	38.04	13.20	35.45
AV	15.59238G	47.09	54.00	-6.91	31.29	3	Vertical	176	2.50	-	38.05	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

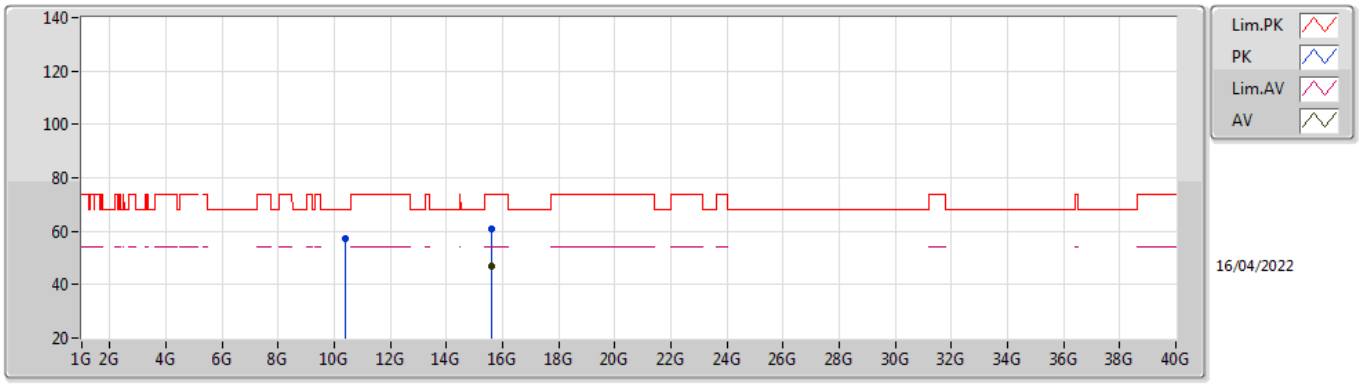


EUT X_1TX
Setting 21.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.383G	57.34	68.20	-10.86	44.16	3	Horizontal	152	2.52	-	38.18	10.56	35.56
PK	15.60048G	60.69	74.00	-13.31	44.94	3	Horizontal	202	2.39	-	38.00	13.20	35.45
AV	15.60348G	47.03	54.00	-6.97	31.31	3	Horizontal	202	2.39	-	37.98	13.20	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

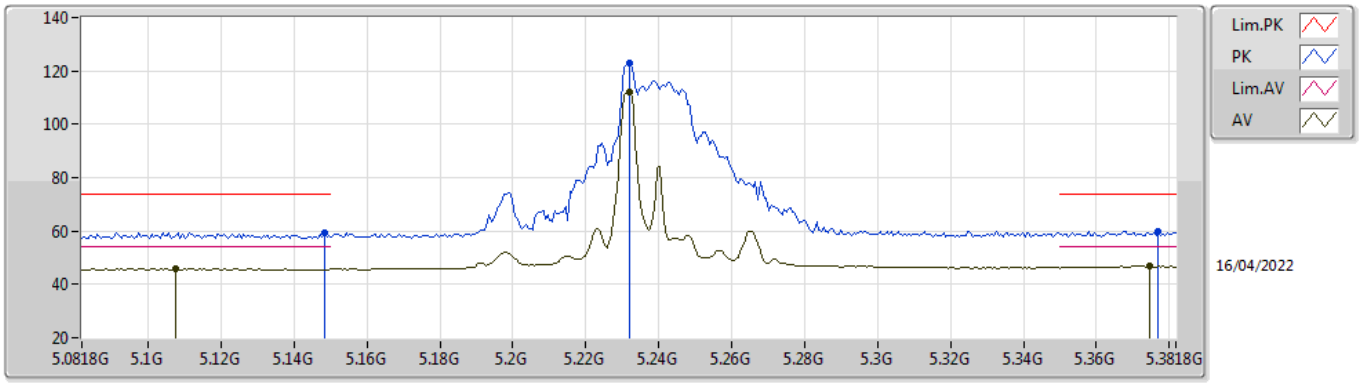


EUT X_1TX
Setting 21.5
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1484G	59.48	74.00	-14.52	53.65	3	Vertical	68	1.85	-	34.00	7.17	35.34
AV	5.1076G	45.76	54.00	-8.24	40.02	3	Vertical	68	1.85	-	33.92	7.15	35.33
PK	5.2318G	123.15	Inf	-Inf	116.96	3	Vertical	68	1.85	-	34.33	7.20	35.34
AV	5.2318G	112.00	Inf	-Inf	105.81	3	Vertical	68	1.85	-	34.33	7.20	35.34
PK	5.377G	59.85	74.00	-14.15	53.45	3	Vertical	68	1.85	-	34.55	7.20	35.35
AV	5.3746G	46.71	54.00	-7.29	40.30	3	Vertical	68	1.85	-	34.55	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

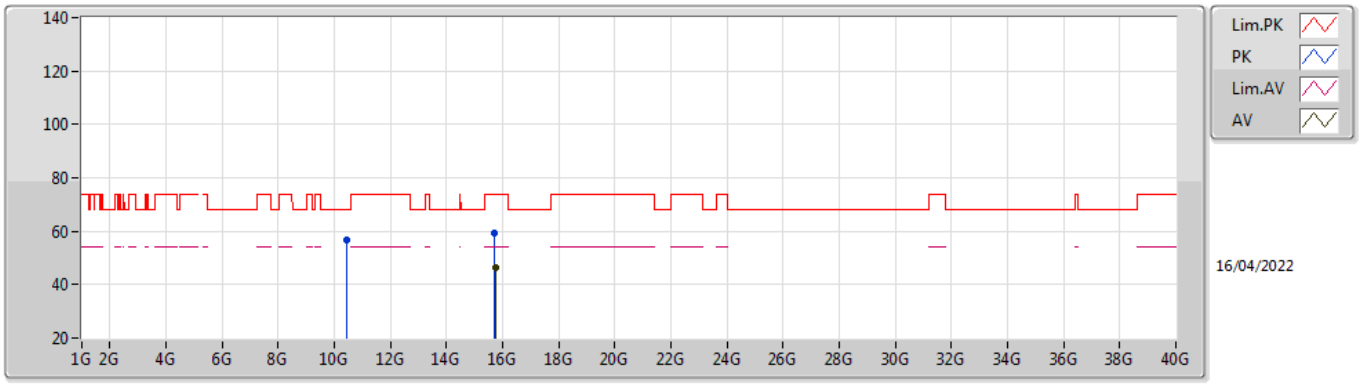


EUT X_1TX
Setting 21.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.4622G	56.53	68.20	-11.67	43.26	3	Vertical	328	1.80	-	38.20	10.57	35.50
PK	15.72162G	59.37	74.00	-14.63	44.08	3	Vertical	97	1.92	-	37.59	13.26	35.56
AV	15.73032G	46.13	54.00	-7.87	30.80	3	Vertical	97	1.92	-	37.62	13.27	35.56

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

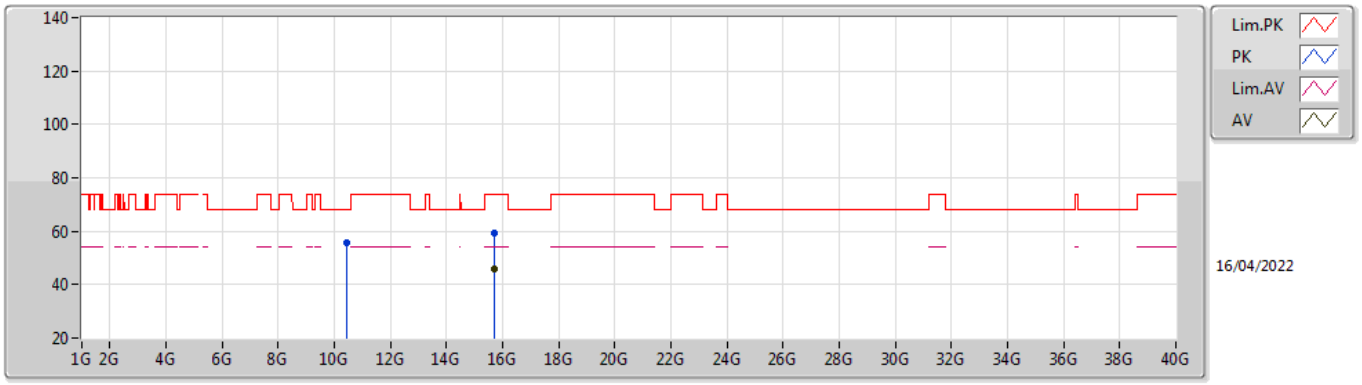


EUT X_1TX
Setting 21.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.463G	55.60	68.20	-12.60	42.33	3	Horizontal	148	1.97	-	38.20	10.57	35.50
PK	15.7245G	59.39	74.00	-14.61	44.09	3	Horizontal	289	1.41	-	37.60	13.26	35.56
AV	15.72084G	46.09	54.00	-7.91	30.81	3	Horizontal	289	1.41	-	37.58	13.26	35.56

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

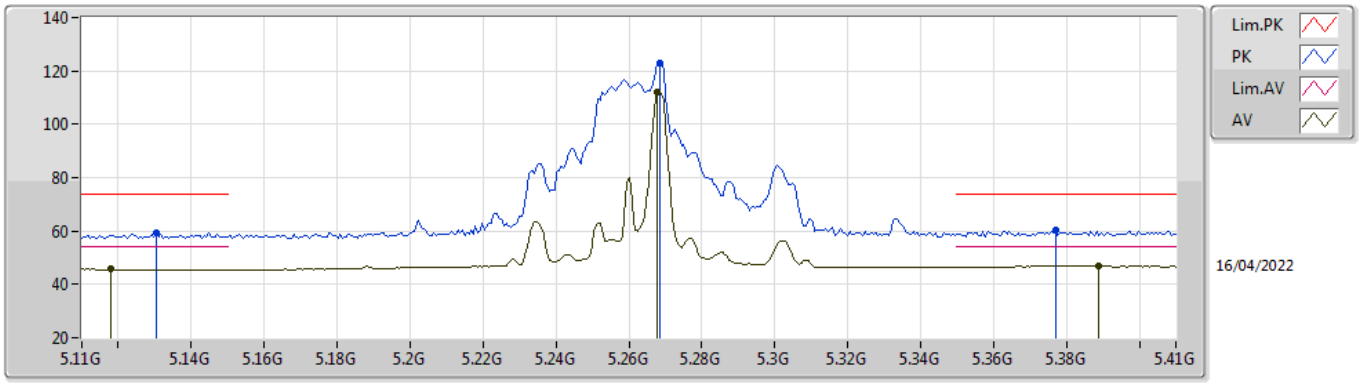


EUT X_1TX
Setting 21.5
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1304G	59.28	74.00	-14.72	53.49	3	Vertical	68	1.82	-	33.96	7.17	35.34
AV	5.1178G	45.66	54.00	-8.34	39.89	3	Vertical	68	1.82	-	33.94	7.16	35.33
PK	5.2684G	123.16	Inf	-Inf	116.86	3	Vertical	68	1.82	-	34.44	7.20	35.34
AV	5.2678G	112.25	Inf	-Inf	105.95	3	Vertical	68	1.82	-	34.44	7.20	35.34
PK	5.377G	60.47	74.00	-13.53	54.07	3	Vertical	68	1.82	-	34.55	7.20	35.35
AV	5.389G	46.82	54.00	-7.18	40.39	3	Vertical	68	1.82	-	34.58	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

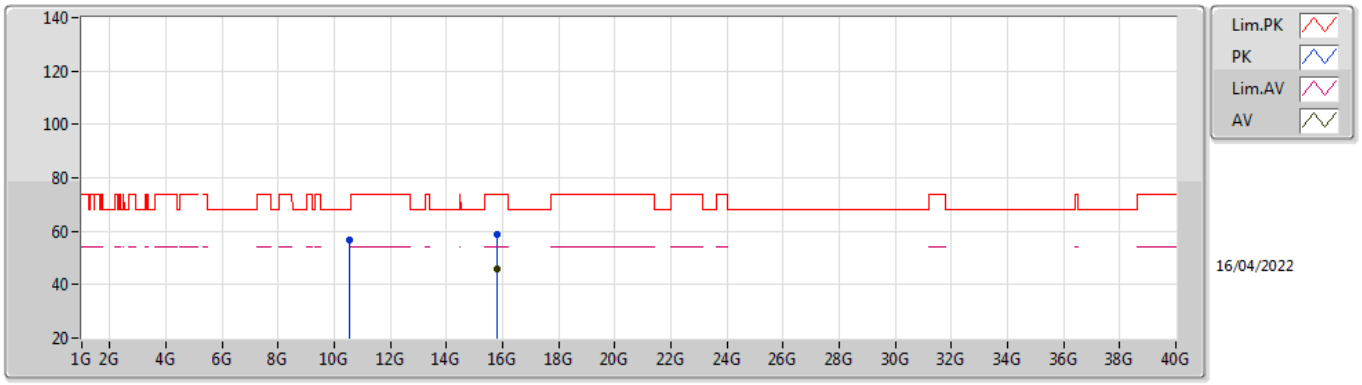


EUT X_1TX
Setting 21.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.5362G	56.70	68.20	-11.50	43.36	3	Vertical	330	1.80	-	38.20	10.58	35.44
PK	15.79314G	58.78	74.00	-15.22	43.23	3	Vertical	195	1.30	-	37.87	13.30	35.62
AV	15.79152G	45.85	54.00	-8.15	30.29	3	Vertical	195	1.30	-	37.87	13.30	35.61

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

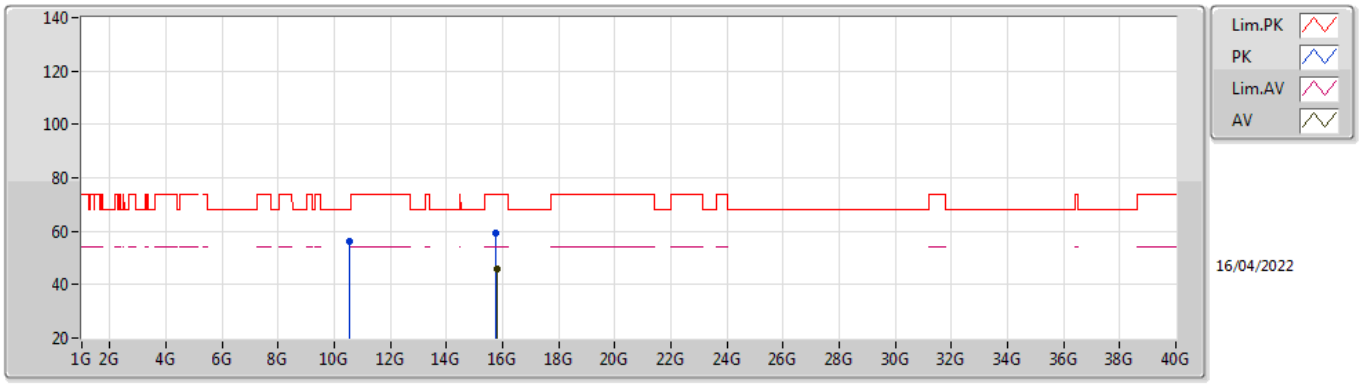


EUT X_1TX
Setting 21.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.5368G	56.21	68.20	-11.99	42.87	3	Horizontal	242	1.08	-	38.20	10.58	35.44
PK	15.7734G	59.09	74.00	-14.91	43.61	3	Horizontal	143	2.15	-	37.79	13.29	35.60
AV	15.78996G	45.81	54.00	-8.19	30.27	3	Horizontal	143	2.15	-	37.86	13.29	35.61

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

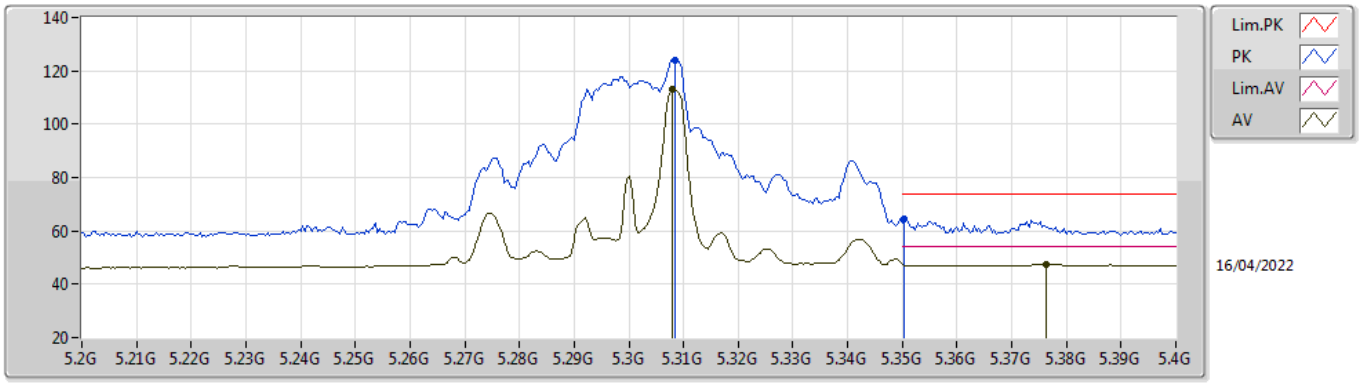


EUT X_1TX
Setting 21.5
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3084G	124.21	Inf	-Inf	117.85	3	Vertical	68	1.74	-	34.50	7.20	35.34
AV	5.308G	113.34	Inf	-Inf	106.98	3	Vertical	68	1.74	-	34.50	7.20	35.34
PK	5.3504G	64.66	74.00	-9.34	58.30	3	Vertical	68	1.74	-	34.50	7.20	35.34
AV	5.3764G	47.47	54.00	-6.53	41.07	3	Vertical	68	1.74	-	34.55	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

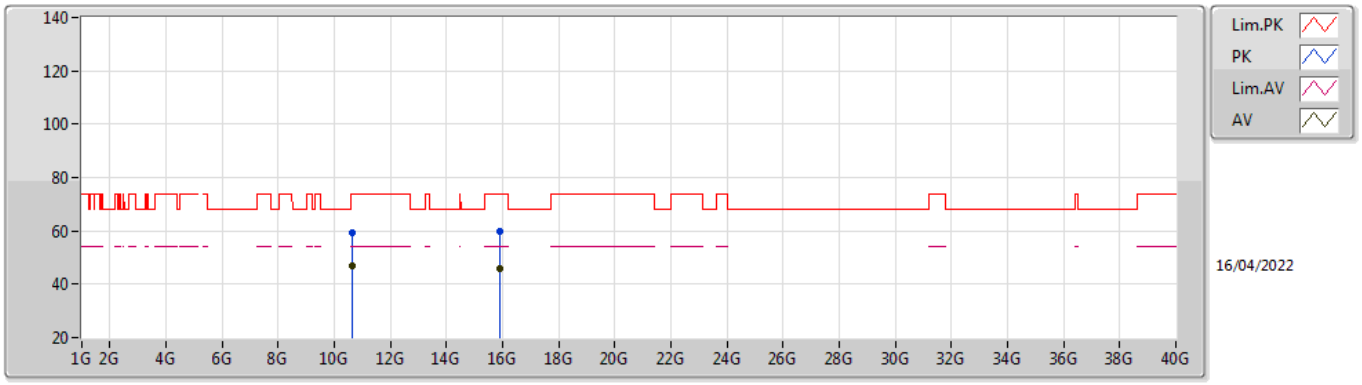


EUT X_1TX
Setting 21.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6158G	59.27	74.00	-14.73	45.82	3	Vertical	178	2.65	-	38.23	10.59	35.37
AV	10.617G	46.65	54.00	-7.35	33.20	3	Vertical	178	2.65	-	38.23	10.59	35.37
PK	15.89484G	59.81	74.00	-14.19	44.54	3	Vertical	16	1.76	-	37.62	13.35	35.70
AV	15.90972G	46.02	54.00	-7.98	30.80	3	Vertical	16	1.76	-	37.58	13.35	35.71

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

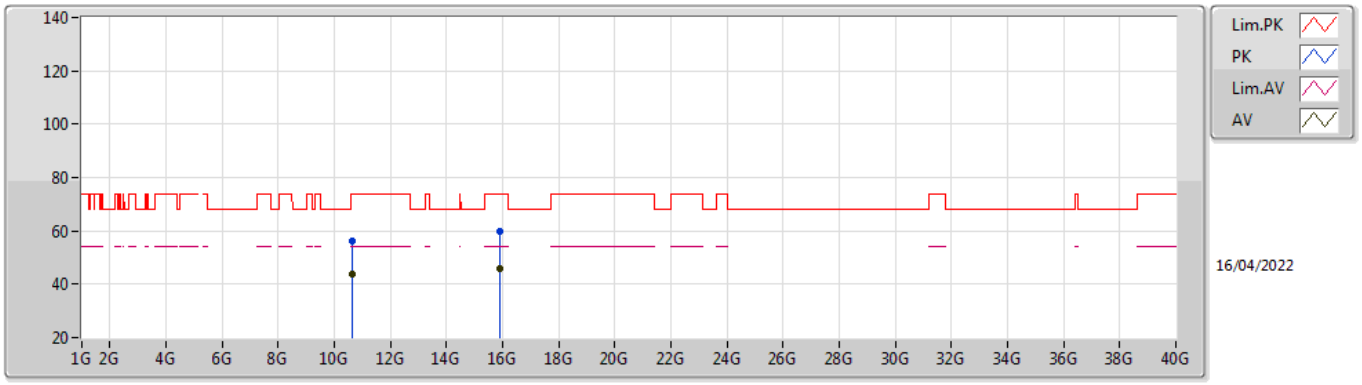


EUT X_1TX
Setting 21.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.616G	56.03	74.00	-17.97	42.58	3	Horizontal	235	2.21	-	38.23	10.59	35.37
AV	10.6168G	43.79	54.00	-10.21	30.34	3	Horizontal	235	2.21	-	38.23	10.59	35.37
PK	15.90426G	59.65	74.00	-14.35	44.42	3	Horizontal	206	2.33	-	37.59	13.35	35.71
AV	15.90522G	46.02	54.00	-7.98	30.79	3	Horizontal	206	2.33	-	37.59	13.35	35.71

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

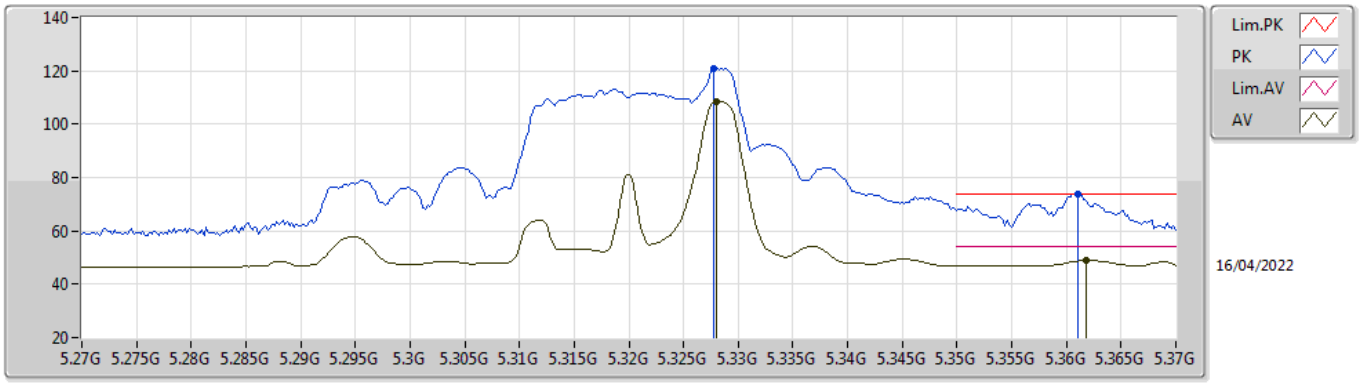


EUT X_1TX
Setting 17.5
03-C-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3278G	120.93	Inf	-Inf	114.57	3	Vertical	69	1.78	-	34.50	7.20	35.34
AV	5.328G	108.65	Inf	-Inf	102.29	3	Vertical	69	1.78	-	34.50	7.20	35.34
PK	5.361G	73.82	74.00	-0.18	67.44	3	Vertical	69	1.78	-	34.52	7.20	35.34
AV	5.3618G	48.88	54.00	-5.12	42.50	3	Vertical	69	1.78	-	34.52	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

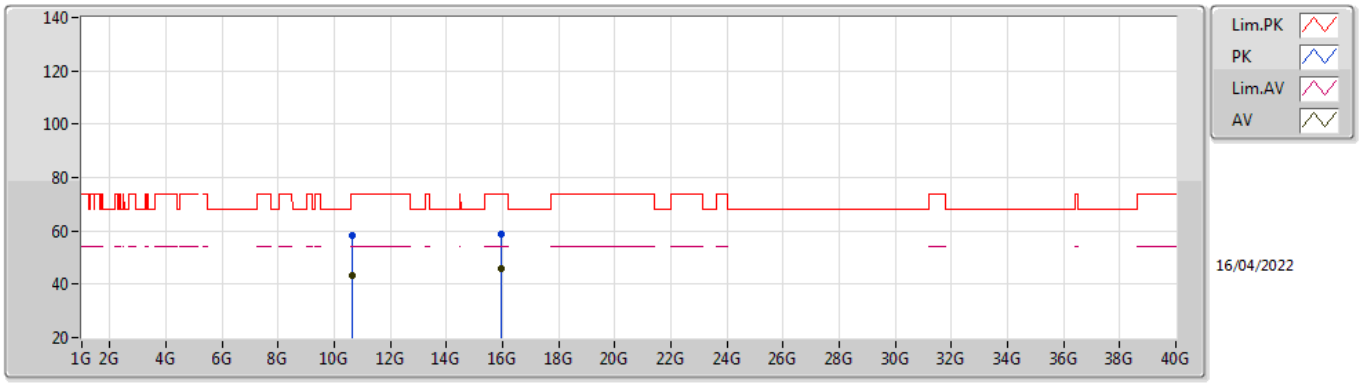


EUT X_1TX
Setting 17.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.656G	58.42	74.00	-15.58	44.85	3	Vertical	175	2.74	-	38.31	10.60	35.34
AV	10.6568G	43.38	54.00	-10.62	29.81	3	Vertical	175	2.74	-	38.31	10.60	35.34
PK	15.95004G	58.99	74.00	-15.01	43.86	3	Vertical	140	1.94	-	37.50	13.38	35.75
AV	15.94782G	45.72	54.00	-8.28	30.60	3	Vertical	140	1.94	-	37.50	13.37	35.75

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

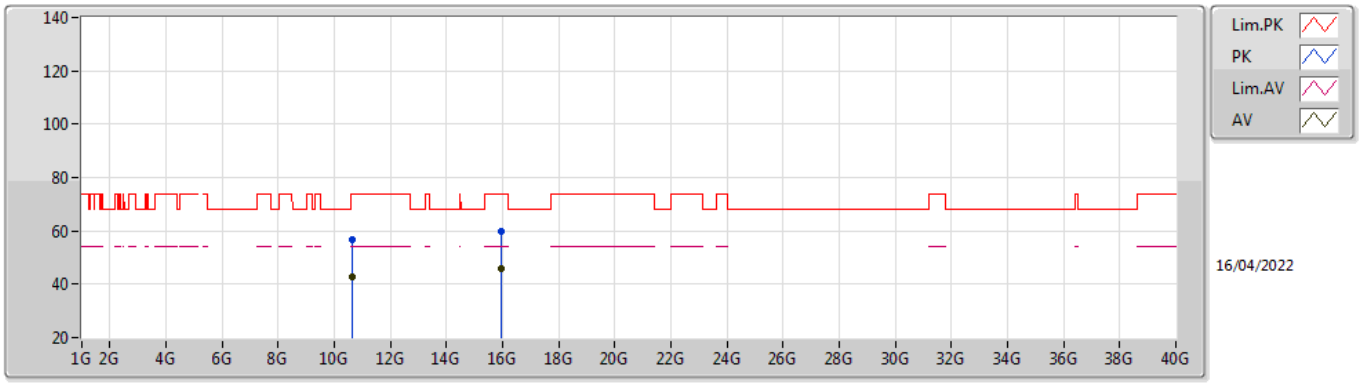


EUT X_1TX
Setting 17.5
03-C-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6578G	56.67	74.00	-17.33	43.08	3	Horizontal	226	2.20	-	38.32	10.60	35.33
AV	10.6566G	42.98	54.00	-11.02	29.41	3	Horizontal	226	2.20	-	38.31	10.60	35.34
PK	15.9546G	59.60	74.00	-14.40	44.48	3	Horizontal	71	1.74	-	37.49	13.38	35.75
AV	15.94728G	45.72	54.00	-8.28	30.59	3	Horizontal	71	1.74	-	37.51	13.37	35.75

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

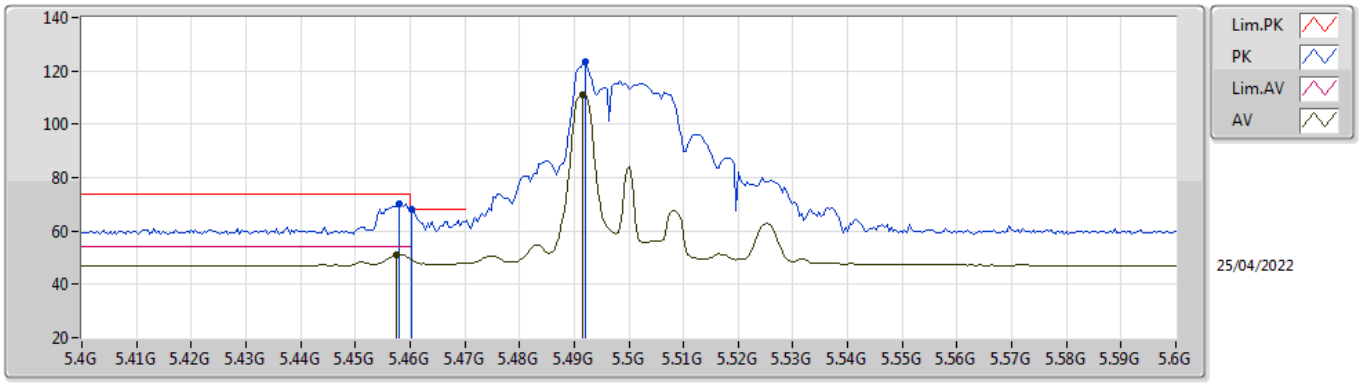


EUT X_1TX
Setting 20
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.458G	69.97	74.00	-4.03	63.54	3	Vertical	76	1.98	-	34.52	7.26	35.35
AV	5.4576G	51.29	54.00	-2.71	44.86	3	Vertical	76	1.98	-	34.52	7.26	35.35
PK	5.4604G	68.13	68.20	-0.07	61.70	3	Vertical	76	1.98	-	34.52	7.26	35.35
PK	5.492G	123.22	Inf	-Inf	116.70	3	Vertical	76	1.98	-	34.58	7.29	35.35
AV	5.4916G	111.04	Inf	-Inf	104.52	3	Vertical	76	1.98	-	34.58	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

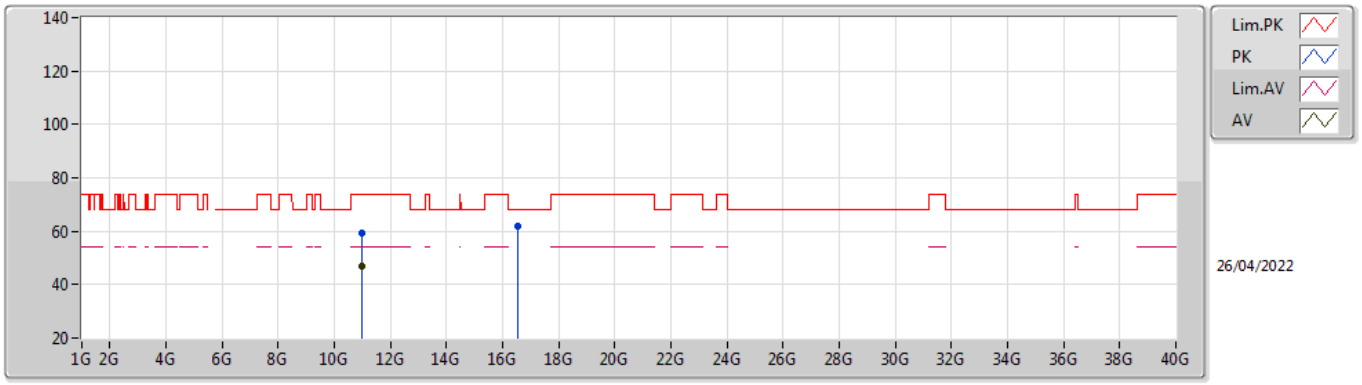


EUT X_1TX
Setting 20
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9833G	59.47	74.00	-14.53	45.49	3	Vertical	204	1.11	-	38.38	10.65	35.05
AV	10.9831G	47.03	54.00	-6.97	33.05	3	Vertical	204	1.11	-	38.38	10.65	35.05
PK	16.5243G	62.14	68.20	-6.06	45.19	3	Vertical	258	2.56	-	38.52	13.77	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

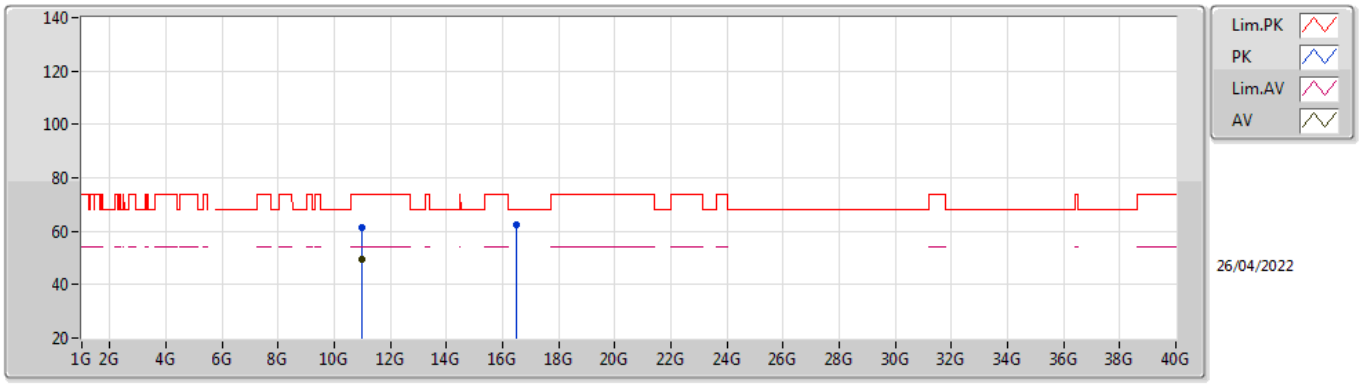


EUT X_1TX
Setting 20
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9838G	61.36	74.00	-12.64	47.38	3	Horizontal	234	2.13	-	38.38	10.65	35.05
AV	10.9831G	49.39	54.00	-4.61	35.41	3	Horizontal	234	2.13	-	38.38	10.65	35.05
PK	16.4943G	62.19	68.20	-6.01	45.44	3	Horizontal	22	2.69	-	38.36	13.75	35.36

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

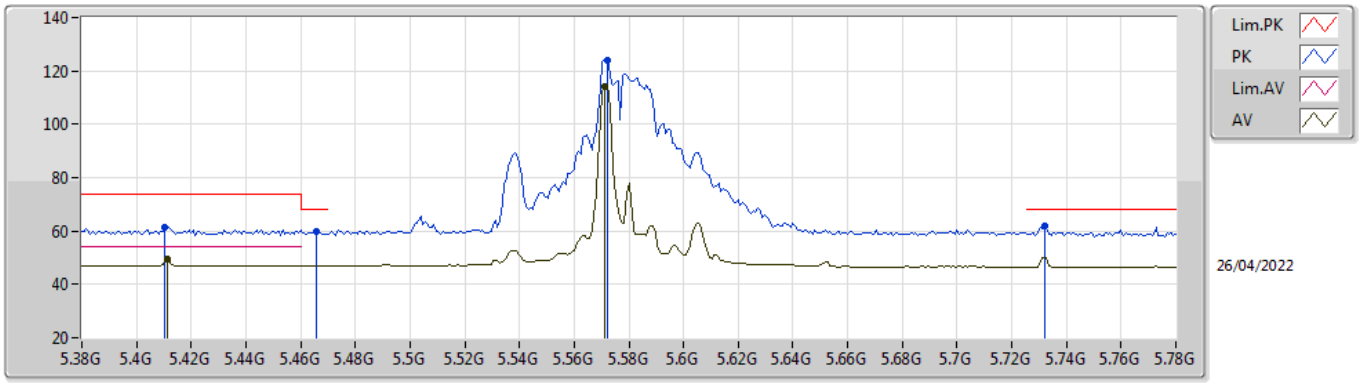


EUT X_1TX
Setting 21.5
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4104G	61.24	74.00	-12.76	54.80	3	Vertical	75	1.90	-	34.58	7.21	35.35
AV	5.4112G	49.36	54.00	-4.64	42.92	3	Vertical	75	1.90	-	34.58	7.21	35.35
PK	5.4656G	59.85	68.20	-8.35	53.40	3	Vertical	75	1.90	-	34.53	7.27	35.35
PK	5.572G	124.09	Inf	-Inf	117.51	3	Vertical	75	1.90	-	34.60	7.37	35.39
AV	5.5712G	114.12	Inf	-Inf	107.54	3	Vertical	75	1.90	-	34.60	7.37	35.39
PK	5.732G	61.88	68.20	-6.32	55.71	3	Vertical	75	1.90	-	34.24	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

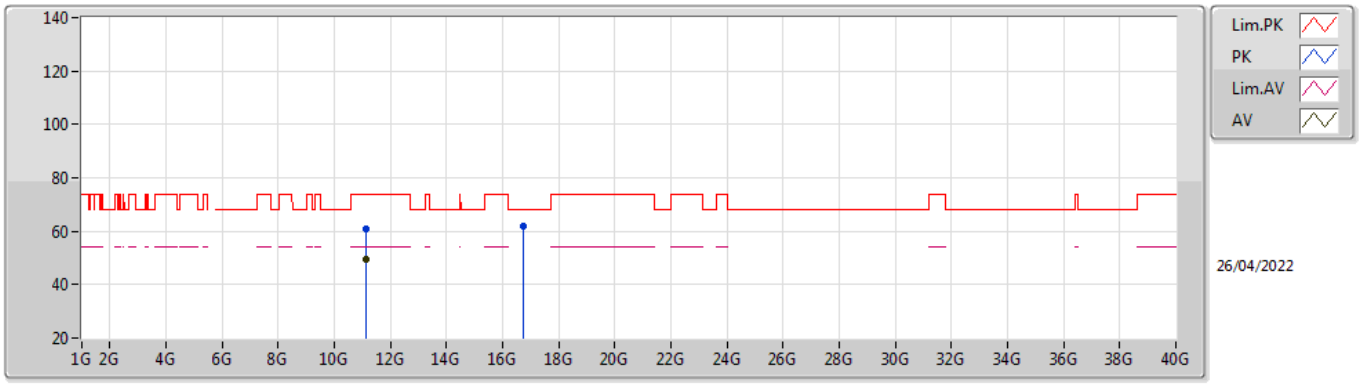


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1439G	60.74	74.00	-13.26	46.73	3	Vertical	227	1.12	-	38.54	10.67	35.20
AV	11.1429G	49.39	54.00	-4.61	35.38	3	Vertical	227	1.12	-	38.54	10.67	35.20
PK	16.7493G	61.92	68.20	-6.28	44.06	3	Vertical	189	1.28	-	39.05	13.92	35.11

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

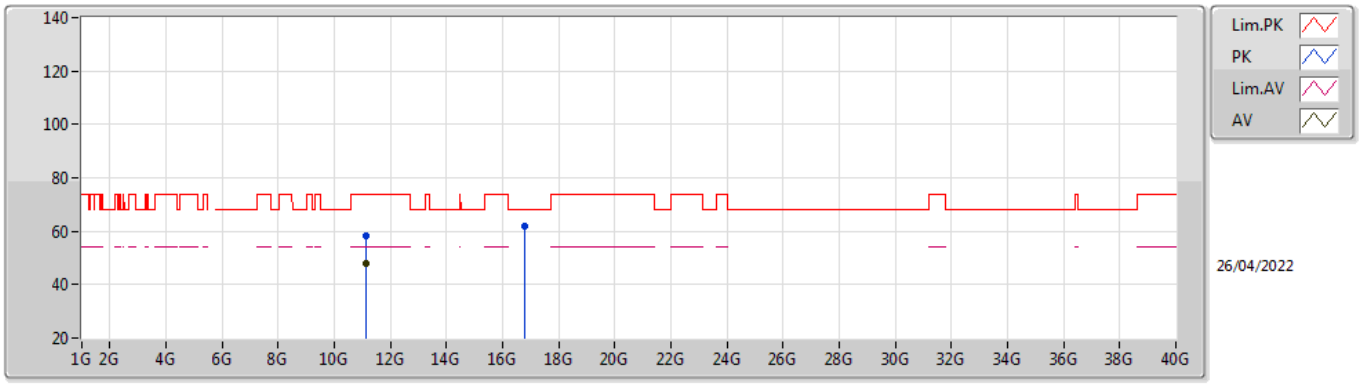


EUT X_1TX
Setting 21.5
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1436G	58.39	74.00	-15.61	44.38	3	Horizontal	94	1.87	-	38.54	10.67	35.20
AV	11.143G	47.75	54.00	-6.25	33.74	3	Horizontal	94	1.87	-	38.54	10.67	35.20
PK	16.7631G	61.74	68.20	-6.46	43.77	3	Horizontal	40	2.74	-	39.14	13.93	35.10

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

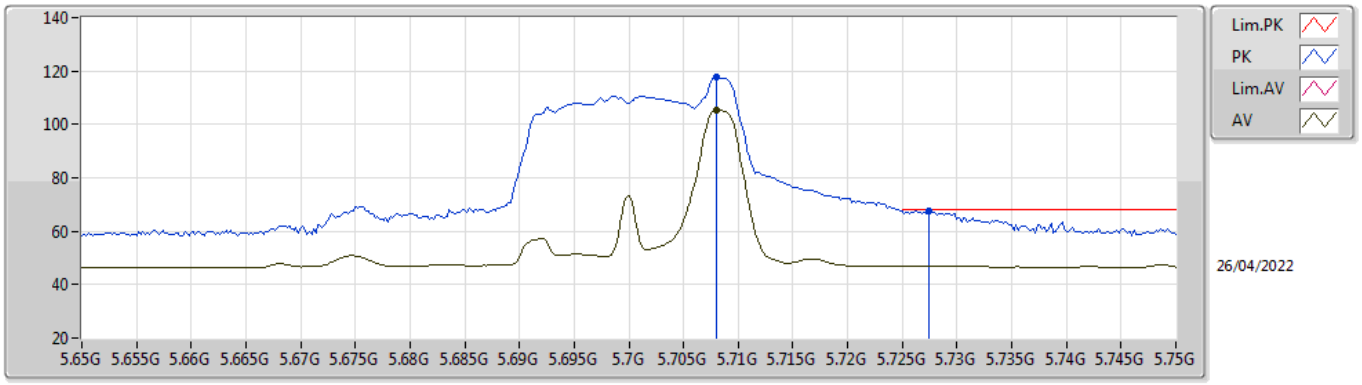


EUT X_1TX
Setting 13.75
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.708G	117.62	Inf	-Inf	111.39	3	Vertical	76	1.93	-	34.28	7.40	35.45
AV	5.708G	105.46	Inf	-Inf	99.23	3	Vertical	76	1.93	-	34.28	7.40	35.45
PK	5.7274G	67.50	68.20	-0.70	61.31	3	Vertical	76	1.93	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

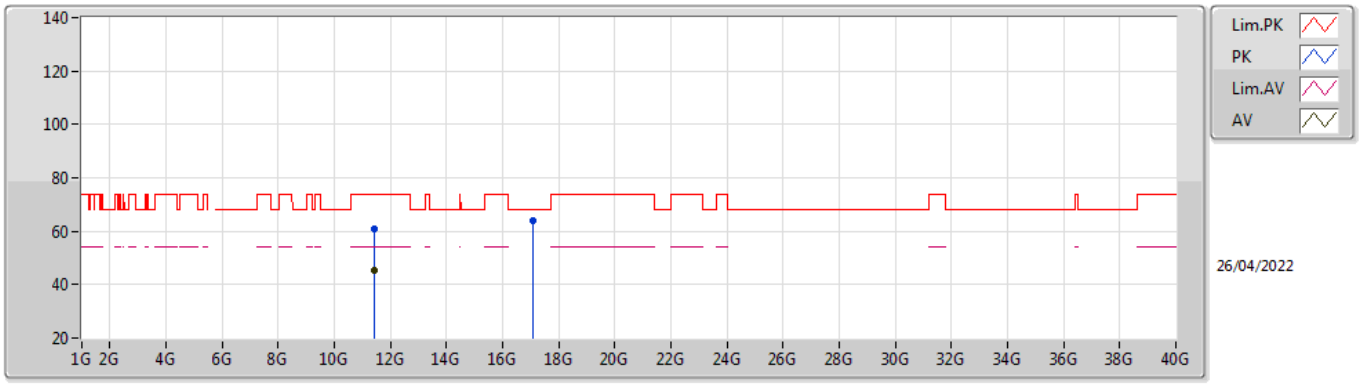


EUT X_1TX
Setting 13.75
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4158G	61.05	74.00	-12.95	47.02	3	Vertical	170	2.50	-	38.83	10.71	35.51
AV	11.4166G	45.55	54.00	-8.45	31.52	3	Vertical	170	2.50	-	38.83	10.71	35.51
PK	17.0781G	64.04	68.20	-4.16	44.63	3	Vertical	96	2.27	-	40.13	14.15	34.87

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

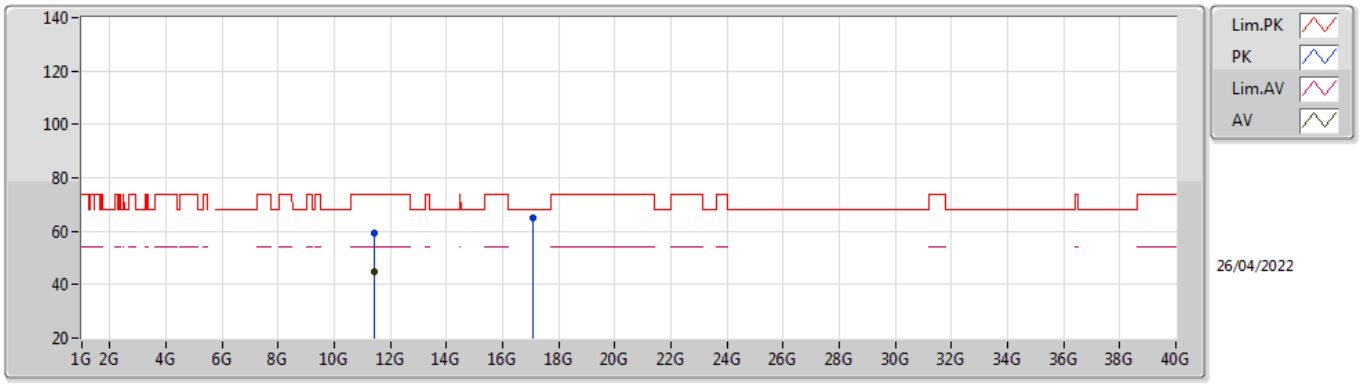


EUT X_1TX
Setting 13.75
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4174G	59.27	74.00	-14.73	45.24	3	Horizontal	136	2.09	-	38.83	10.71	35.51
AV	11.4167G	44.69	54.00	-9.31	30.66	3	Horizontal	136	2.09	-	38.83	10.71	35.51
PK	17.0888G	65.19	68.20	-3.01	45.73	3	Horizontal	344	2.56	-	40.17	14.16	34.87

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

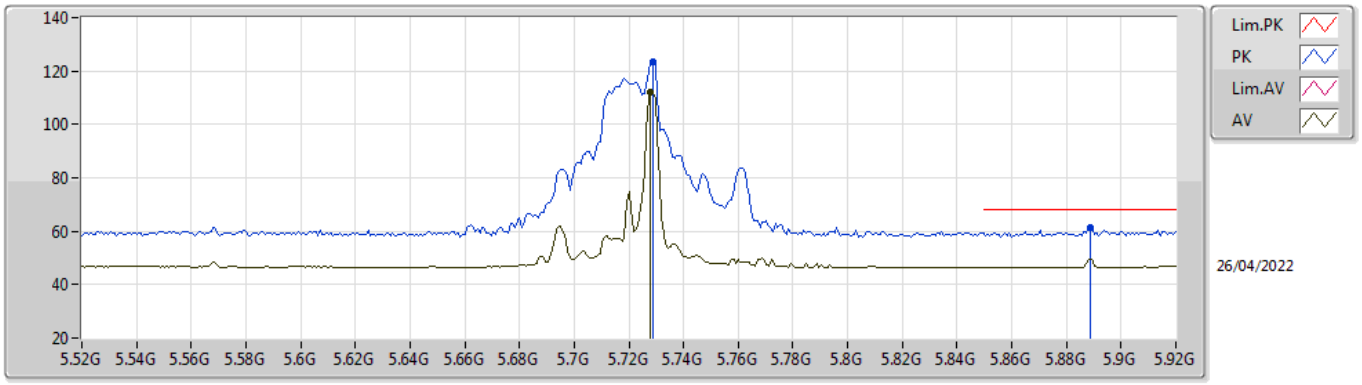


EUT X_1TX
Setting 20
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7288G	123.33	Inf	-Inf	117.15	3	Vertical	77	1.89	-	34.24	7.40	35.46
AV	5.728G	112.05	Inf	-Inf	105.87	3	Vertical	77	1.89	-	34.24	7.40	35.46
PK	5.8888G	61.60	68.20	-6.60	55.12	3	Vertical	77	1.89	-	34.53	7.49	35.54

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

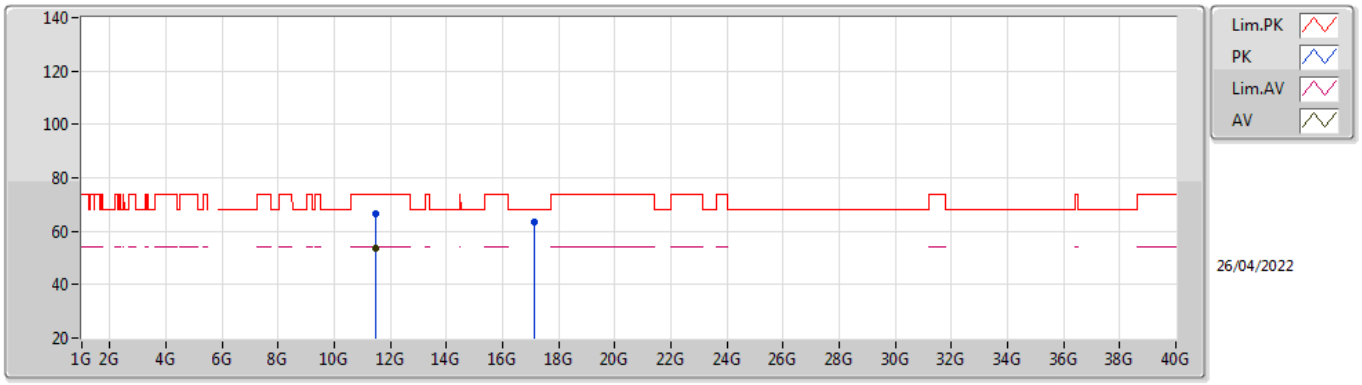


EUT X_1TX
Setting 20
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4574G	66.59	74.00	-7.41	52.51	3	Vertical	158	2.79	-	38.91	10.72	35.55
AV	11.4568G	53.83	54.00	-0.17	39.75	3	Vertical	158	2.79	-	38.91	10.72	35.55
PK	17.1453G	63.37	68.20	-4.83	43.66	3	Vertical	323	1.38	-	40.38	14.20	34.87

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

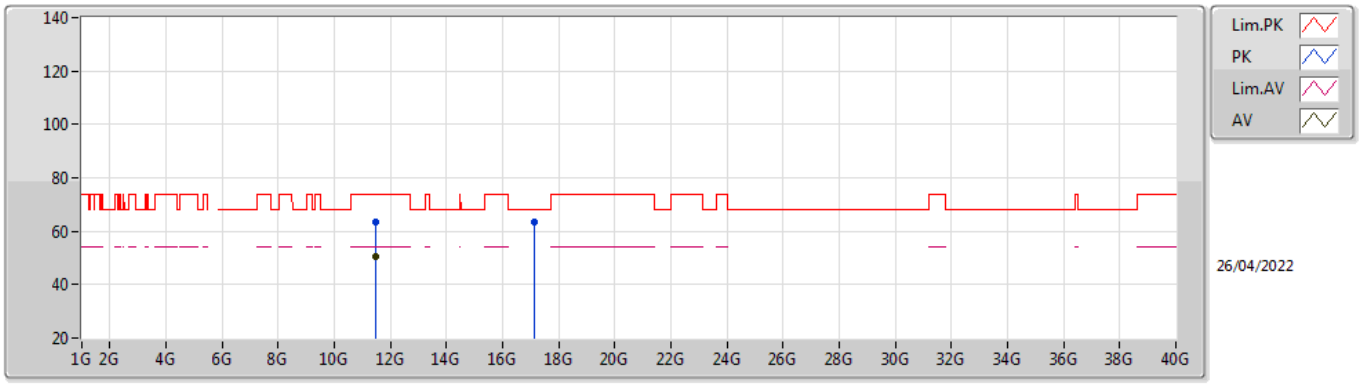


EUT X_1TX
Setting 20
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4575G	63.57	74.00	-10.43	49.49	3	Horizontal	134	2.17	-	38.91	10.72	35.55
AV	11.4568G	50.63	54.00	-3.37	36.55	3	Horizontal	134	2.17	-	38.91	10.72	35.55
PK	17.1518G	63.70	68.20	-4.50	43.96	3	Horizontal	143	1.12	-	40.41	14.21	34.88

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

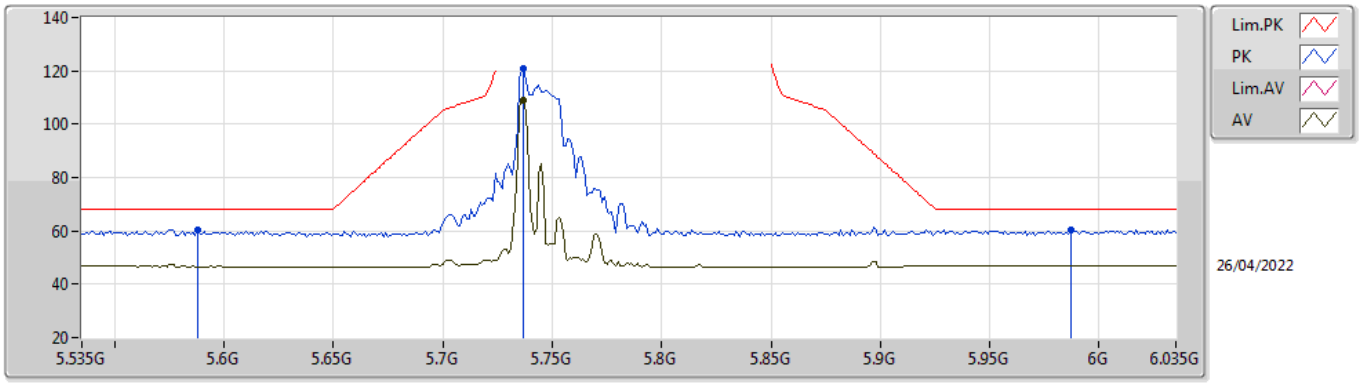


EUT X_1TX
Setting 19
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.588G	60.46	68.20	-7.74	53.86	3	Vertical	74	1.89	-	34.60	7.39	35.39
PK	5.737G	120.72	Inf	-Inf	114.56	3	Vertical	74	1.89	-	34.23	7.40	35.47
AV	5.737G	108.91	Inf	-Inf	102.75	3	Vertical	74	1.89	-	34.23	7.40	35.47
PK	5.987G	60.50	68.20	-7.70	53.70	3	Vertical	74	1.89	-	34.80	7.59	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

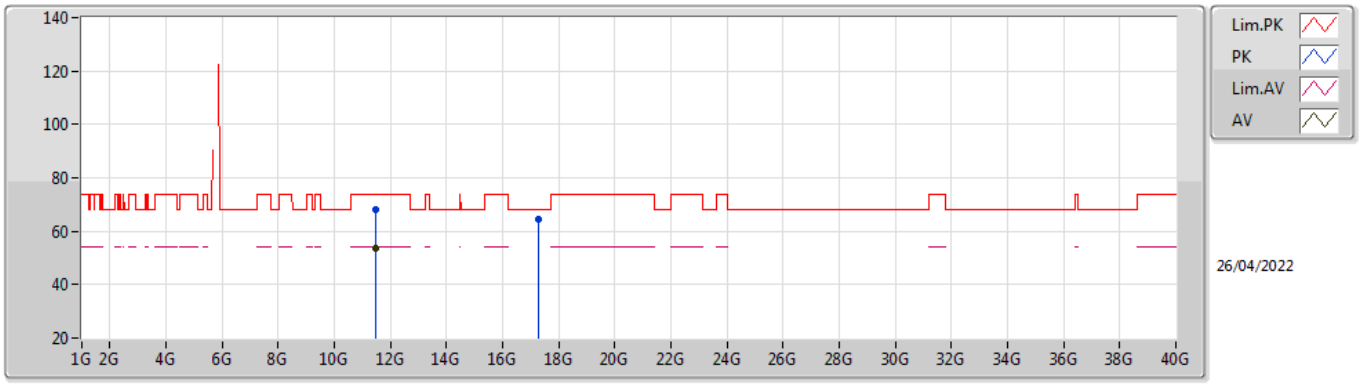


EUT X_1TX
Setting 19
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4736G	68.35	74.00	-5.65	54.25	3	Vertical	164	2.79	-	38.95	10.72	35.57
AV	11.473G	53.84	54.00	-0.16	39.74	3	Vertical	164	2.79	-	38.95	10.72	35.57
PK	17.2553G	64.35	68.20	-3.85	44.03	3	Vertical	338	1.97	-	40.93	14.28	34.89

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

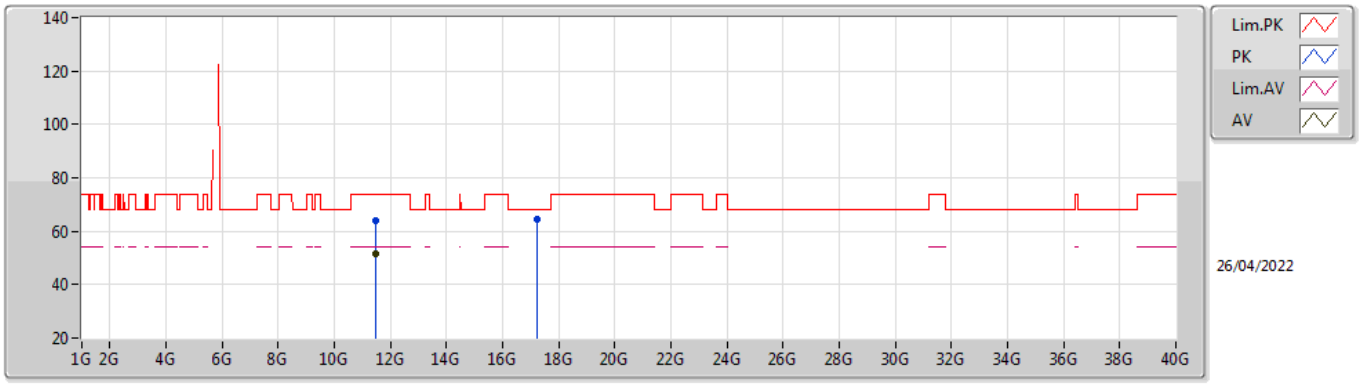


EUT X_1TX
Setting 19
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4735G	63.85	74.00	-10.15	49.75	3	Horizontal	135	2.14	-	38.95	10.72	35.57
AV	11.4732G	51.46	54.00	-2.54	37.36	3	Horizontal	135	2.14	-	38.95	10.72	35.57
PK	17.2397G	64.74	68.20	-3.46	44.51	3	Horizontal	304	2.75	-	40.84	14.27	34.88

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

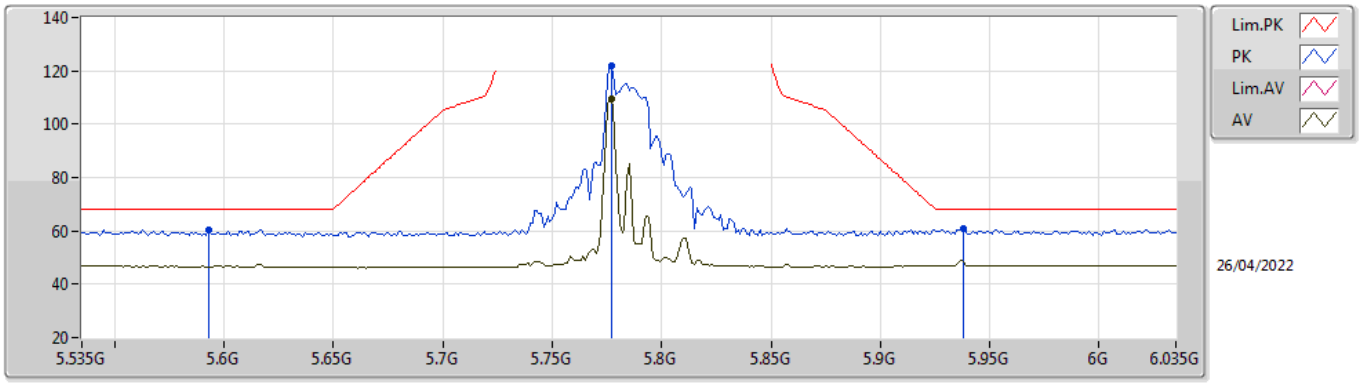


EUT X_1TX
Setting 18
03-C-R-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.593G	60.33	68.20	-7.87	53.74	3	Vertical	77	1.90	-	34.60	7.39	35.40
PK	5.777G	121.86	Inf	-Inf	115.75	3	Vertical	77	1.90	-	34.20	7.40	35.49
AV	5.777G	109.53	Inf	-Inf	103.42	3	Vertical	77	1.90	-	34.20	7.40	35.49
PK	5.938G	60.78	68.20	-7.42	54.06	3	Vertical	77	1.90	-	34.75	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

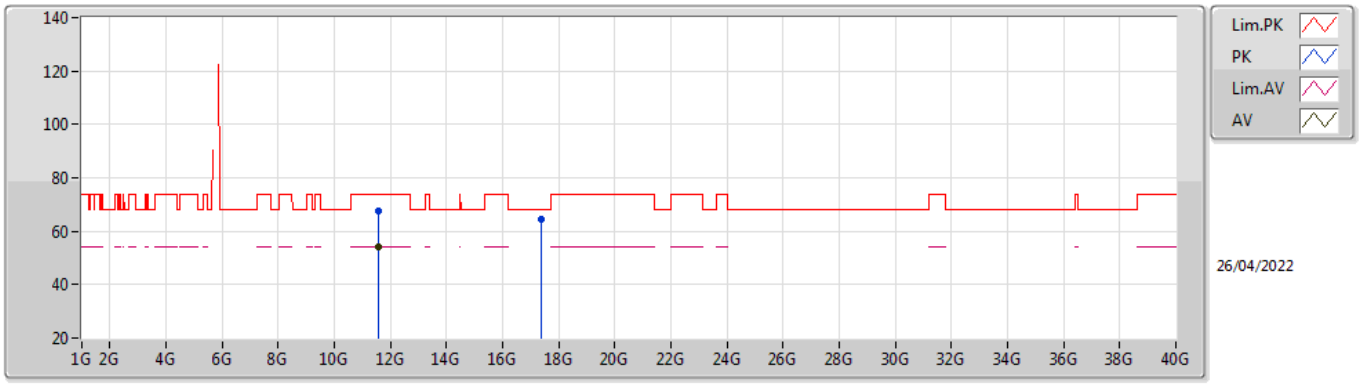


EUT X_1TX
Setting 18
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5537G	67.77	74.00	-6.23	53.42	3	Vertical	173	3.00	-	39.21	10.73	35.59
AV	11.5531G	53.97	54.00	-0.03	39.62	3	Vertical	173	3.00	-	39.21	10.73	35.59
PK	17.3537G	64.66	68.20	-3.54	43.80	3	Vertical	42	2.29	-	41.41	14.35	34.90

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

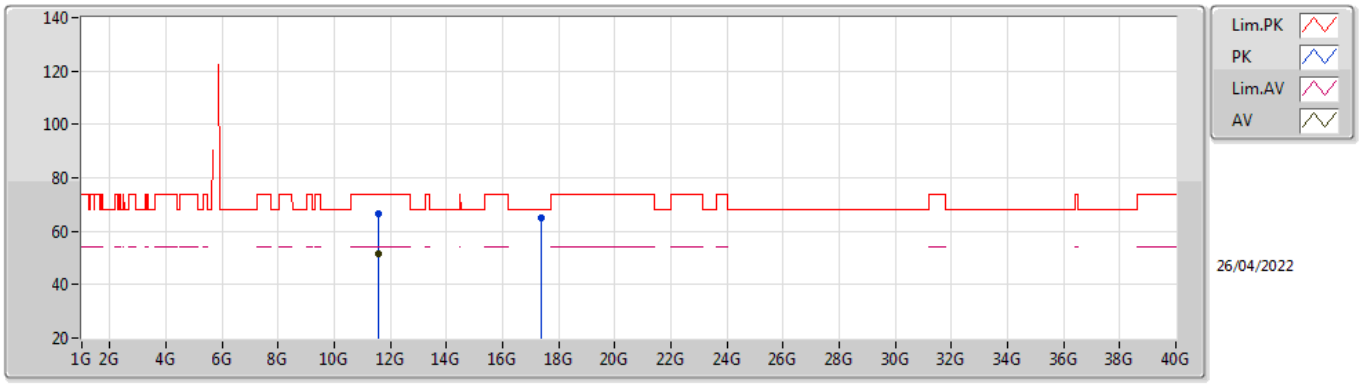


EUT X_1TX
Setting 18
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5536G	66.53	74.00	-7.47	52.18	3	Horizontal	186	2.14	-	39.21	10.73	35.59
AV	11.5529G	51.67	54.00	-2.33	37.32	3	Horizontal	186	2.14	-	39.21	10.73	35.59
PK	17.3634G	64.98	68.20	-3.22	44.08	3	Horizontal	37	1.76	-	41.45	14.35	34.90

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

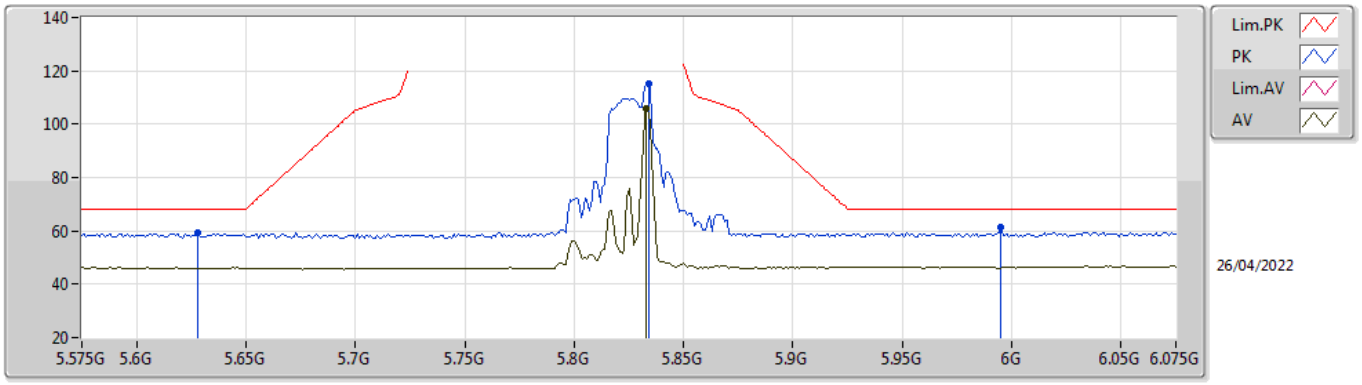


EUT X_1TX
Setting 18
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.628G	59.10	68.20	-9.10	52.57	3	Vertical	172	1.80	-	34.54	7.40	35.41
PK	5.834G	114.95	Inf	-Inf	108.77	3	Vertical	172	1.80	-	34.27	7.43	35.52
AV	5.833G	106.02	Inf	-Inf	99.84	3	Vertical	172	1.80	-	34.27	7.43	35.52
PK	5.995G	61.54	68.20	-6.66	54.75	3	Vertical	172	1.80	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

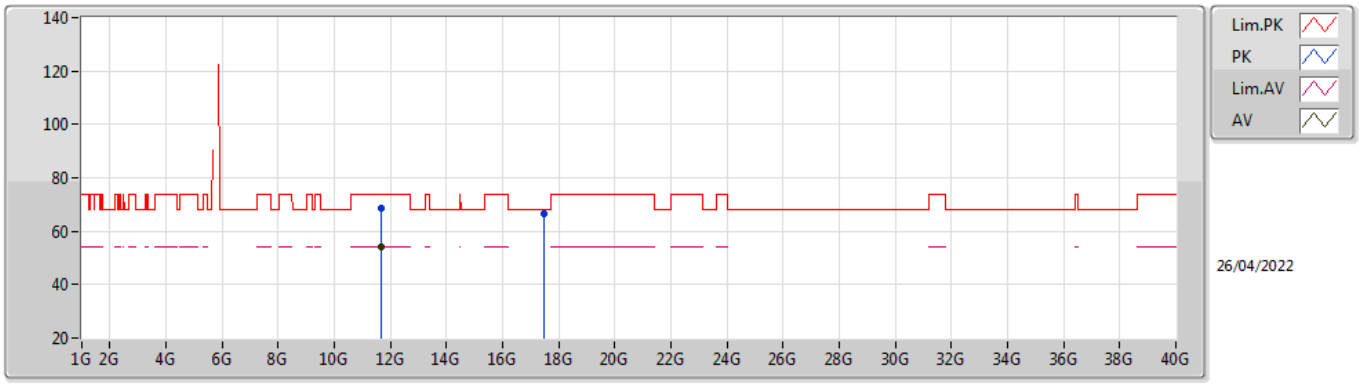


EUT X_1TX
Setting 18
03-C-R-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6657G	68.80	74.00	-5.20	54.21	3	Vertical	176	2.70	-	39.40	10.75	35.56
AV	11.6668G	53.92	54.00	-0.08	39.33	3	Vertical	176	2.70	-	39.40	10.75	35.56
PK	17.48502G	66.57	68.20	-1.63	44.67	3	Vertical	282	1.80	-	42.37	14.44	34.91

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

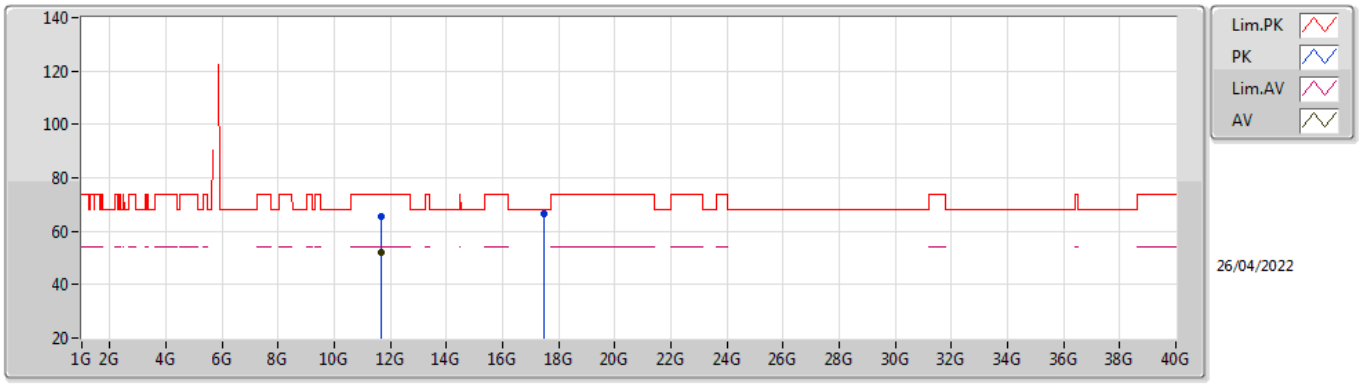

EUT X_1TX
Setting 18
03-C-R-5


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6659G	65.38	74.00	-8.62	50.79	3	Horizontal	191	2.08	-	39.40	10.75	35.56
AV	11.6669G	51.82	54.00	-2.18	37.23	3	Horizontal	191	2.08	-	39.40	10.75	35.56
PK	17.4876G	66.77	68.20	-1.43	44.85	3	Horizontal	329	2.16	-	42.39	14.44	34.91

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	AV	11.556G	53.99	54.00	-0.01	3	Vertical	171	2.60	-

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

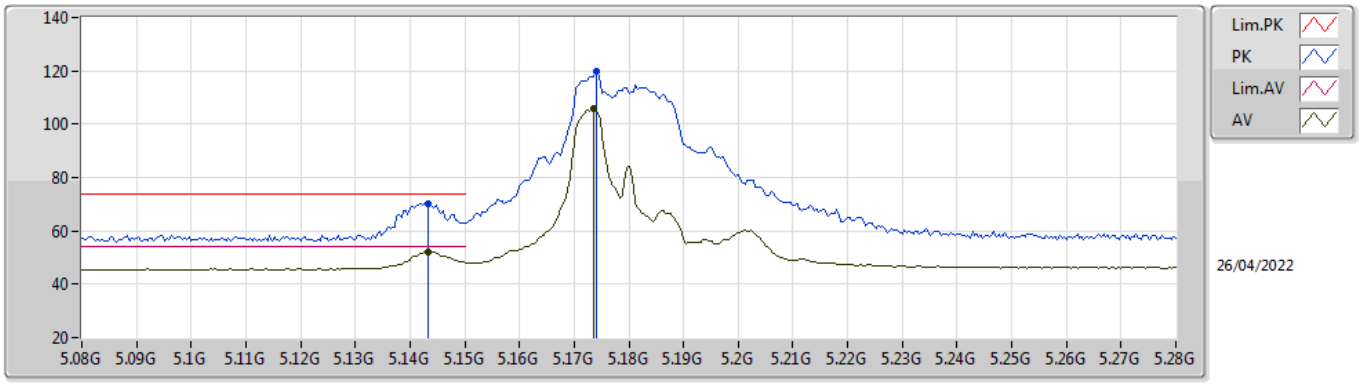


EUT X_1TX
Setting 20.25
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1432G	70.36	74.00	-3.64	64.54	3	Vertical	80	1.83	-	33.99	7.17	35.34
AV	5.1432G	51.98	54.00	-2.02	46.16	3	Vertical	80	1.83	-	33.99	7.17	35.34
PK	5.174G	119.80	Inf	-Inf	113.85	3	Vertical	80	1.83	-	34.10	7.19	35.34
AV	5.1736G	105.93	Inf	-Inf	99.99	3	Vertical	80	1.83	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

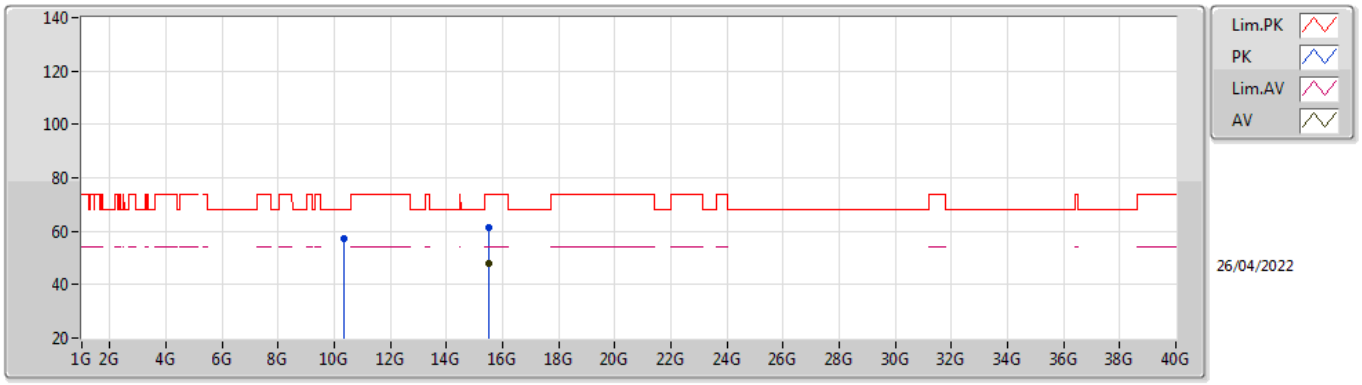


EUT X_1TX
Setting 20.25
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.3454G	57.20	68.20	-11.00	44.09	3	Vertical	190	2.76	-	38.15	10.55	35.59
PK	15.5204G	61.17	74.00	-12.83	44.84	3	Vertical	18	1.53	-	38.56	13.16	35.39
AV	15.5186G	48.08	54.00	-5.92	31.74	3	Vertical	18	1.53	-	38.57	13.16	35.39

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

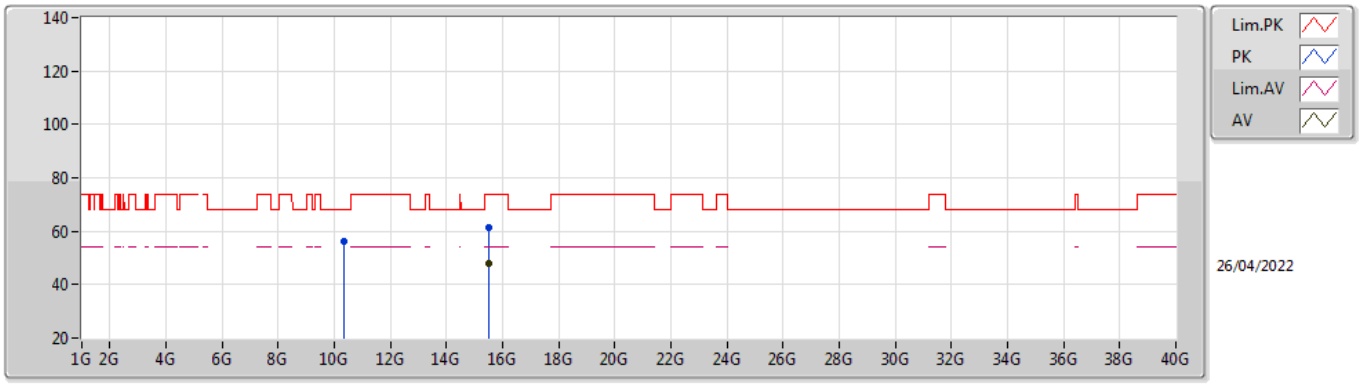


EUT X_1TX
Setting 20.25
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.3464G	56.22	68.20	-11.98	43.11	3	Horizontal	165	1.20	-	38.15	10.55	35.59
PK	15.5192G	61.44	74.00	-12.56	45.10	3	Horizontal	21	2.03	-	38.57	13.16	35.39
AV	15.5176G	48.09	54.00	-5.91	31.73	3	Horizontal	21	2.03	-	38.58	13.16	35.38

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

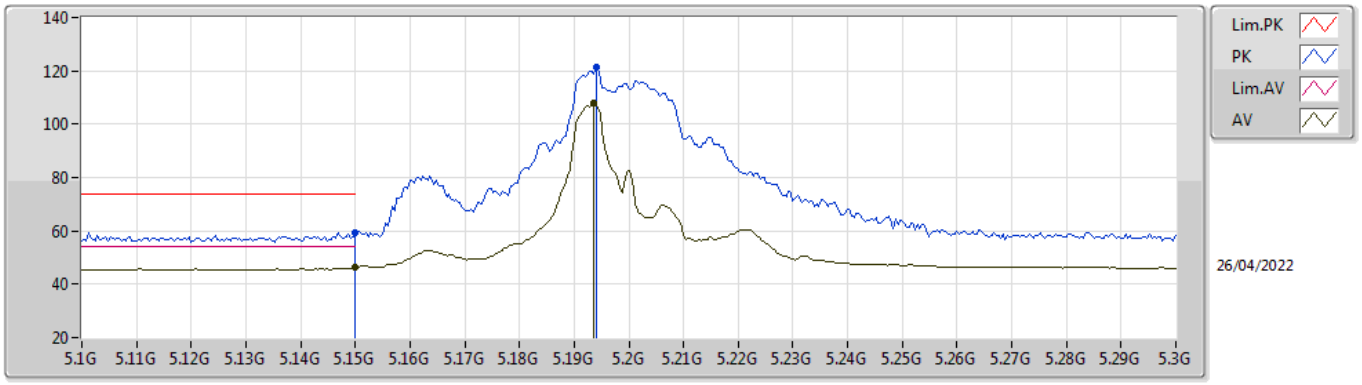


EUT X_1TX
Setting 21.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	59.51	74.00	-14.49	53.68	3	Vertical	79	1.82	-	34.00	7.17	35.34
AV	5.15G	46.24	54.00	-7.76	40.41	3	Vertical	79	1.82	-	34.00	7.17	35.34
PK	5.194G	121.29	Inf	-Inf	115.25	3	Vertical	79	1.82	-	34.18	7.20	35.34
AV	5.1936G	107.69	Inf	-Inf	101.66	3	Vertical	79	1.82	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

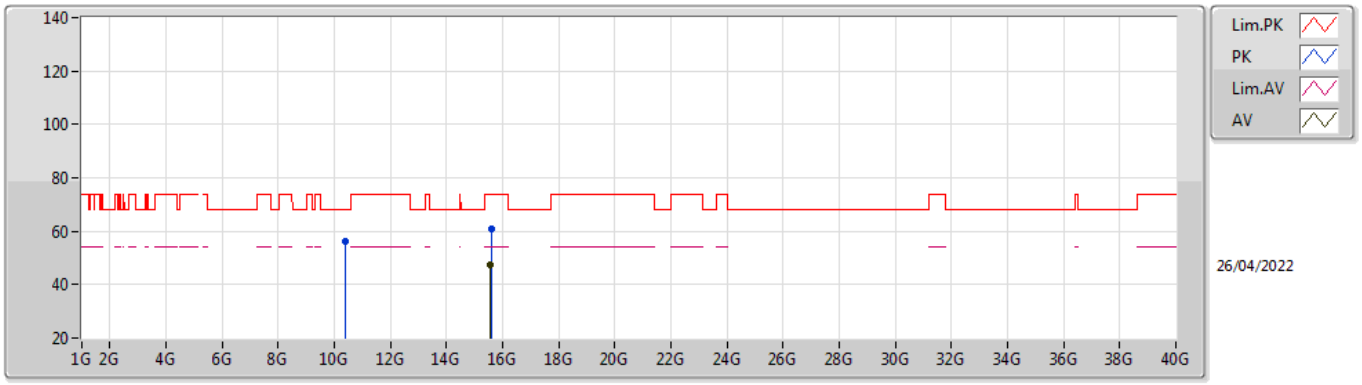


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.386G	56.22	68.20	-11.98	43.03	3	Vertical	343	1.80	-	38.19	10.56	35.56
PK	15.5938G	61.00	74.00	-13.00	45.21	3	Vertical	162	1.09	-	38.04	13.20	35.45
AV	15.5792G	47.35	54.00	-6.65	31.45	3	Vertical	162	1.09	-	38.15	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

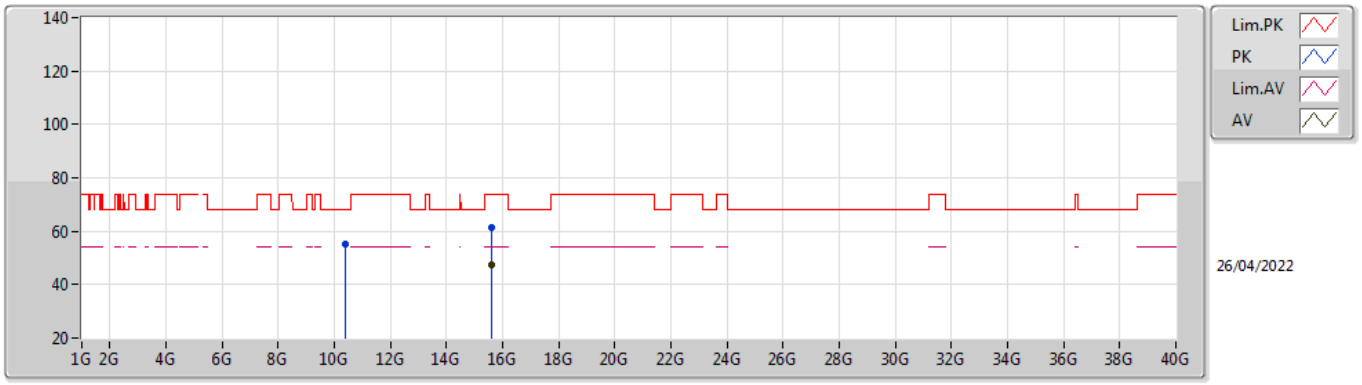


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.386G	55.25	68.20	-12.95	42.06	3	Horizontal	332	2.96	-	38.19	10.56	35.56
PK	15.6042G	61.26	74.00	-12.74	45.54	3	Horizontal	317	1.27	-	37.98	13.20	35.46
AV	15.5894G	47.35	54.00	-6.65	31.54	3	Horizontal	317	1.27	-	38.07	13.19	35.45

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

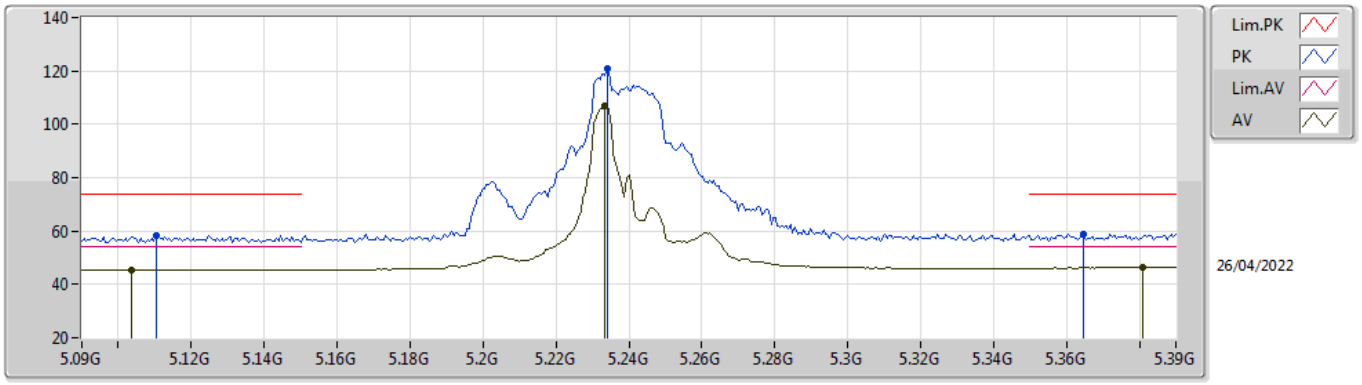


EUT X_1TX
Setting 21.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1104G	58.31	74.00	-15.69	52.56	3	Vertical	78	1.80	-	33.92	7.16	35.33
AV	5.1038G	45.50	54.00	-8.50	39.77	3	Vertical	78	1.80	-	33.91	7.15	35.33
PK	5.234G	120.72	Inf	-Inf	114.52	3	Vertical	78	1.80	-	34.34	7.20	35.34
AV	5.2334G	107.02	Inf	-Inf	100.83	3	Vertical	78	1.80	-	34.33	7.20	35.34
PK	5.3648G	58.89	74.00	-15.11	52.50	3	Vertical	78	1.80	-	34.53	7.20	35.34
AV	5.381G	46.40	54.00	-7.60	39.99	3	Vertical	78	1.80	-	34.56	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

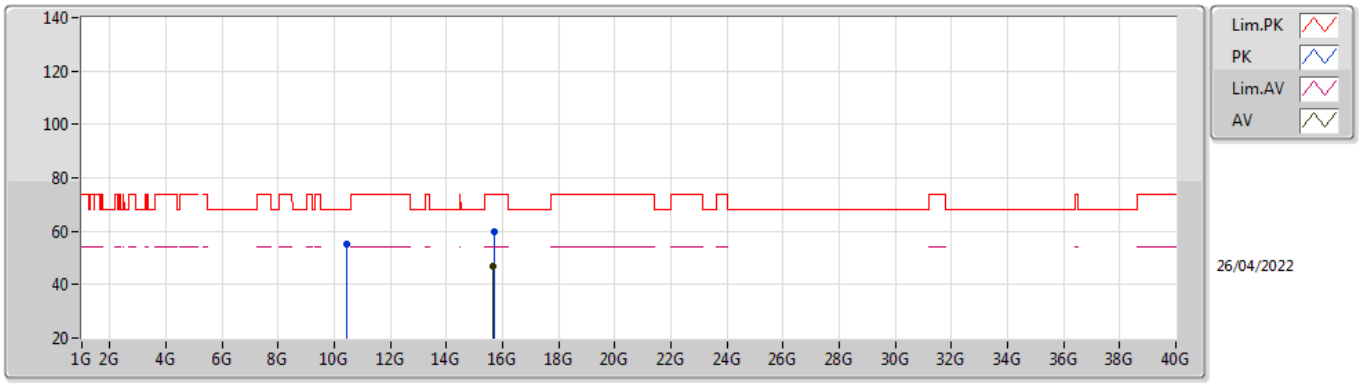


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.4662G	55.31	68.20	-12.89	42.04	3	Vertical	342	1.80	-	38.20	10.57	35.50
PK	15.681G	59.87	74.00	-14.13	44.56	3	Vertical	296	1.33	-	37.59	13.24	35.52
AV	15.6724G	46.67	54.00	-7.33	31.30	3	Vertical	296	1.33	-	37.64	13.24	35.51

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

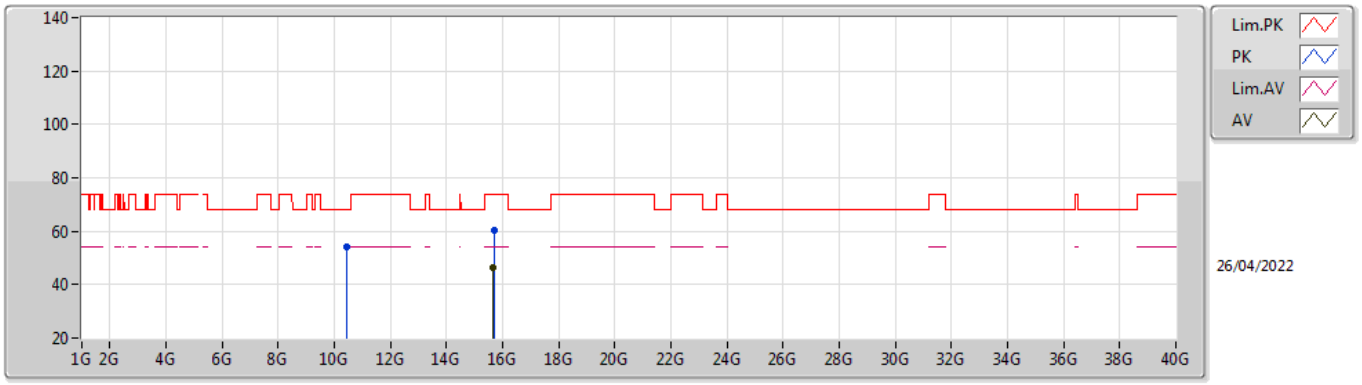


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.4672G	54.24	68.20	-13.96	40.97	3	Horizontal	8	1.23	-	38.20	10.57	35.50
PK	15.7176G	60.46	74.00	-13.54	45.18	3	Horizontal	291	1.30	-	37.57	13.26	35.55
AV	15.674G	46.58	54.00	-7.42	31.23	3	Horizontal	291	1.30	-	37.63	13.24	35.52

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

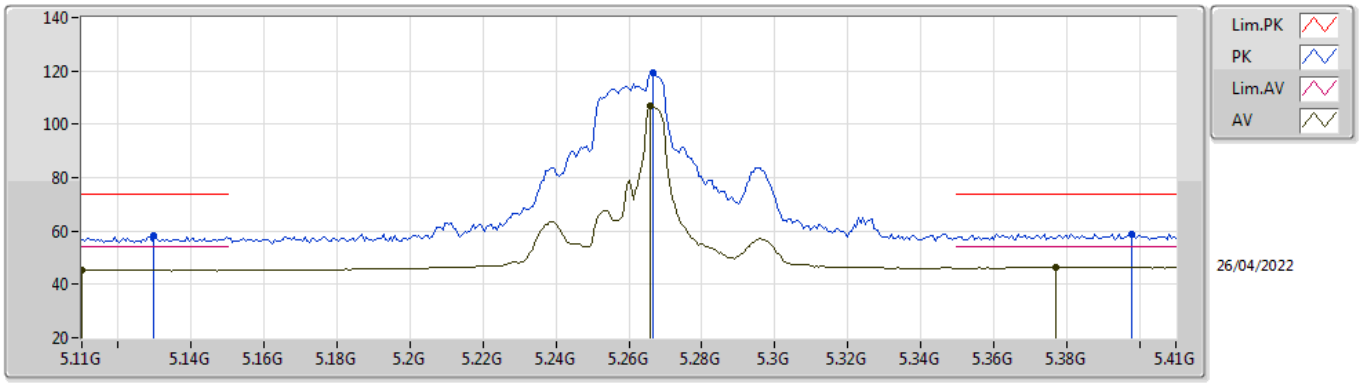


EUT X_1TX
Setting 21.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1298G	58.15	74.00	-15.85	52.37	3	Vertical	83	1.96	-	33.96	7.16	35.34
AV	5.11G	45.40	54.00	-8.60	39.65	3	Vertical	83	1.96	-	33.92	7.16	35.33
PK	5.2666G	119.11	Inf	-Inf	112.82	3	Vertical	83	1.96	-	34.43	7.20	35.34
AV	5.266G	107.00	Inf	-Inf	100.71	3	Vertical	83	1.96	-	34.43	7.20	35.34
PK	5.398G	59.00	74.00	-15.00	52.55	3	Vertical	83	1.96	-	34.60	7.20	35.35
AV	5.377G	46.40	54.00	-7.60	40.00	3	Vertical	83	1.96	-	34.55	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

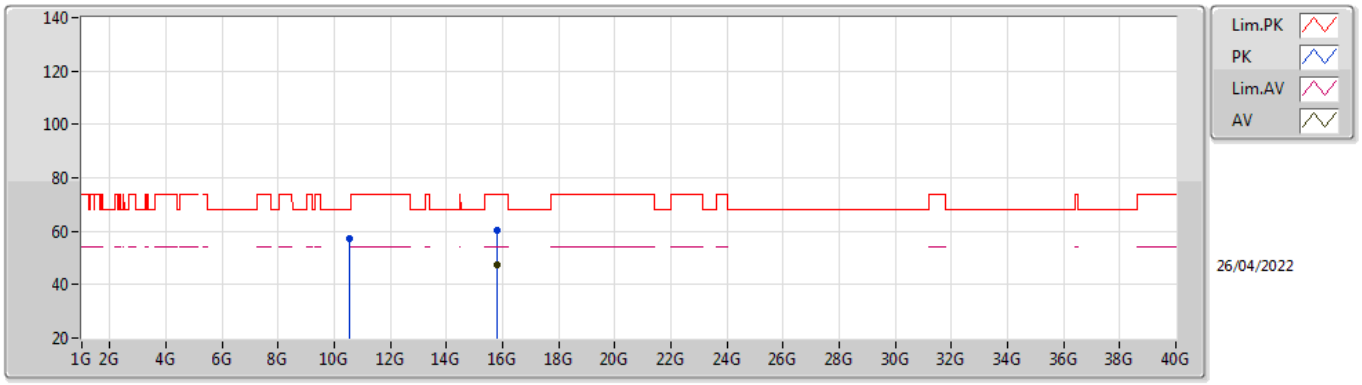


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.5342G	57.01	68.20	-11.19	43.67	3	Vertical	178	2.75	-	38.20	10.58	35.44
PK	15.8014G	60.15	74.00	-13.85	44.57	3	Vertical	134	1.33	-	37.90	13.30	35.62
AV	15.801G	47.25	54.00	-6.75	31.67	3	Vertical	134	1.33	-	37.90	13.30	35.62

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

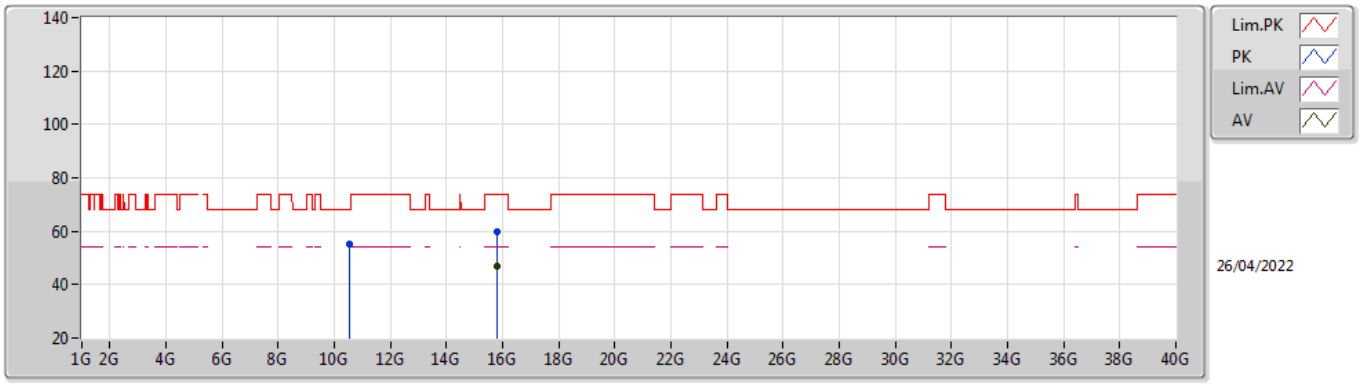


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.5286G	55.37	68.20	-12.83	42.04	3	Horizontal	232	2.22	-	38.20	10.58	35.45
PK	15.8044G	60.07	74.00	-13.93	44.51	3	Horizontal	218	1.77	-	37.89	13.30	35.63
AV	15.8012G	47.13	54.00	-6.87	31.55	3	Horizontal	218	1.77	-	37.90	13.30	35.62

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

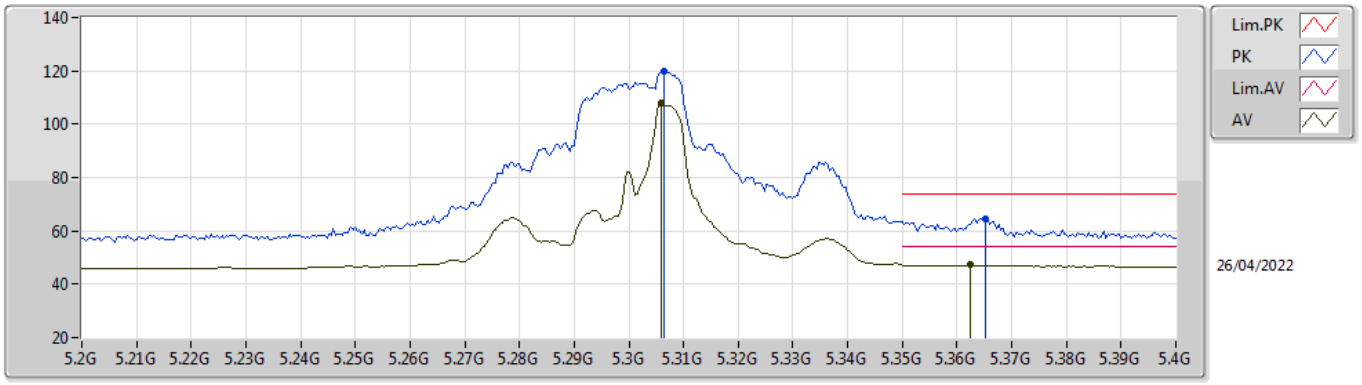


EUT X_1TX
Setting 21.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3064G	120.05	Inf	-Inf	113.69	3	Vertical	81	1.95	-	34.50	7.20	35.34
AV	5.306G	107.77	Inf	-Inf	101.41	3	Vertical	81	1.95	-	34.50	7.20	35.34
PK	5.3652G	64.31	74.00	-9.69	57.92	3	Vertical	81	1.95	-	34.53	7.20	35.34
AV	5.3624G	47.16	54.00	-6.84	40.78	3	Vertical	81	1.95	-	34.52	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

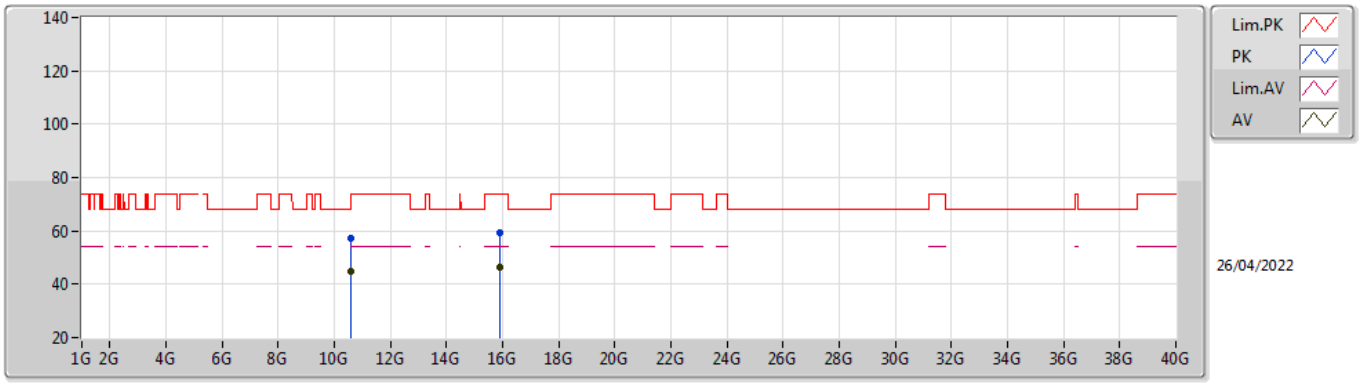


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6136G	57.16	74.00	-16.84	43.71	3	Vertical	182	2.77	-	38.23	10.59	35.37
AV	10.614G	44.67	54.00	-9.33	31.22	3	Vertical	182	2.77	-	38.23	10.59	35.37
PK	15.92G	59.22	74.00	-14.78	44.02	3	Vertical	43	2.84	-	37.56	13.36	35.72
AV	15.921G	46.25	54.00	-7.75	31.05	3	Vertical	43	2.84	-	37.56	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

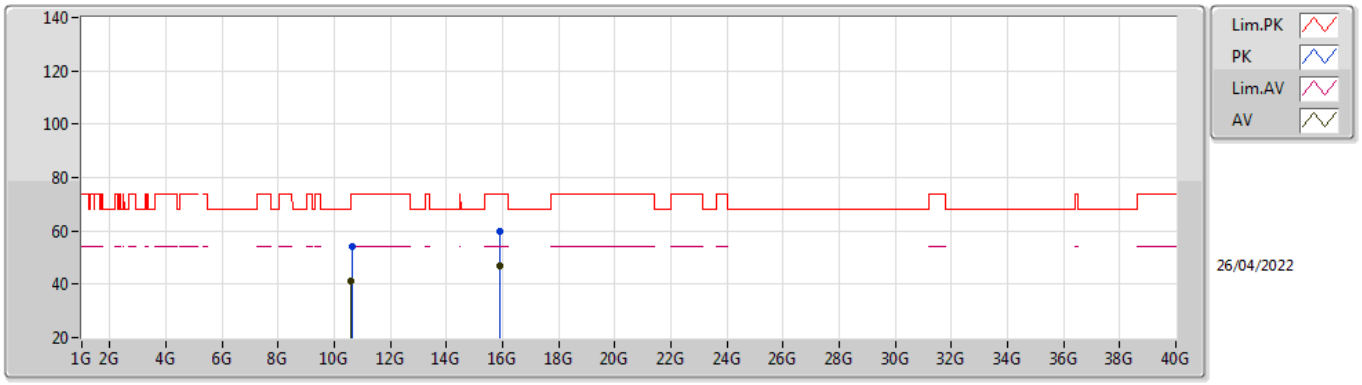


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6154G	54.36	74.00	-19.64	40.91	3	Horizontal	232	1.80	-	38.23	10.59	35.37
AV	10.6144G	41.42	54.00	-12.58	27.97	3	Horizontal	232	1.80	-	38.23	10.59	35.37
PK	15.9206G	59.65	74.00	-14.35	44.45	3	Horizontal	57	2.73	-	37.56	13.36	35.72
AV	15.921G	46.80	54.00	-7.20	31.60	3	Horizontal	57	2.73	-	37.56	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

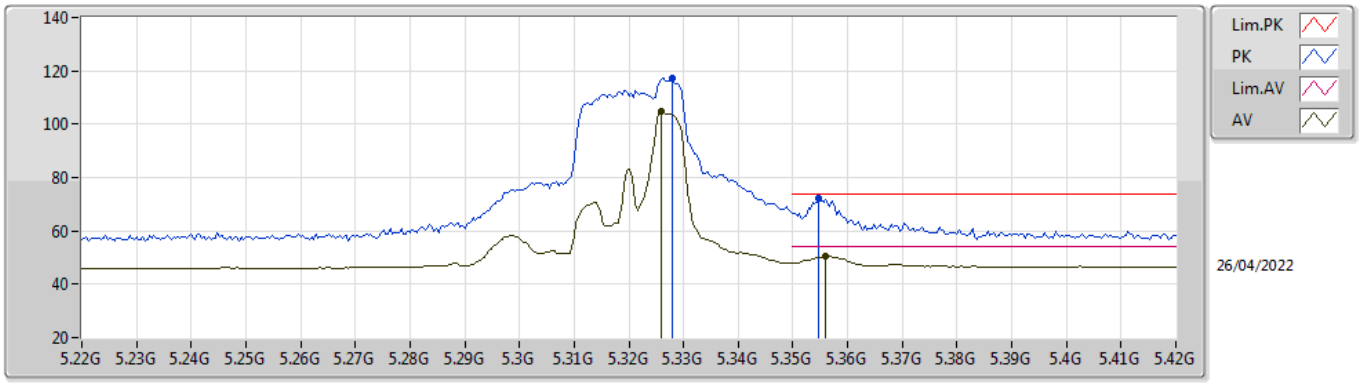


EUT X_1TX
Setting 17.75
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.328G	117.03	Inf	-Inf	110.67	3	Vertical	81	1.96	-	34.50	7.20	35.34
AV	5.326G	104.57	Inf	-Inf	98.21	3	Vertical	81	1.96	-	34.50	7.20	35.34
PK	5.3548G	72.03	74.00	-1.97	65.66	3	Vertical	81	1.96	-	34.51	7.20	35.34
AV	5.356G	50.38	54.00	-3.62	44.01	3	Vertical	81	1.96	-	34.51	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

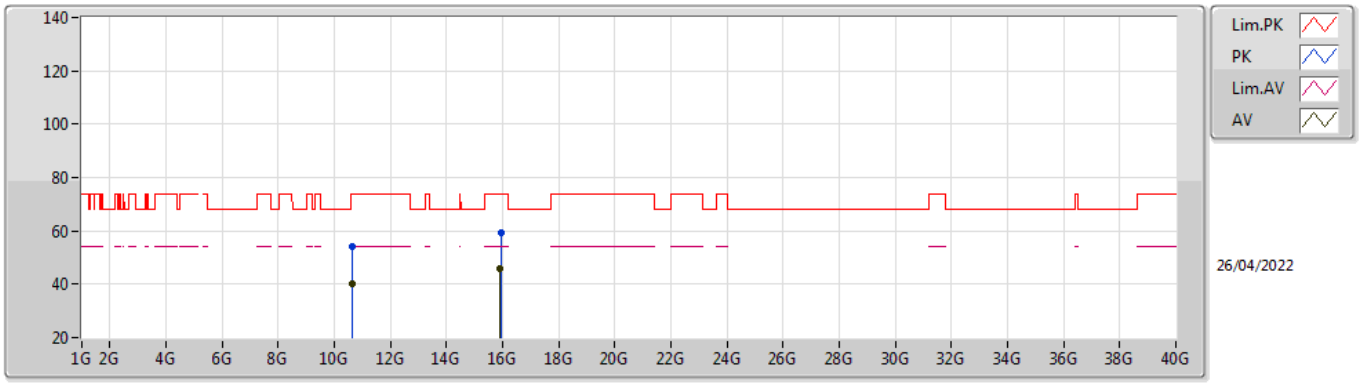


EUT X_1TX
Setting 17.75
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.63688G	53.97	74.00	-20.03	40.45	3	Vertical	94	1.99	-	38.27	10.60	35.35
AV	10.64588G	40.20	54.00	-13.80	26.65	3	Vertical	94	1.99	-	38.29	10.60	35.34
PK	15.9452G	59.36	74.00	-14.64	44.22	3	Vertical	120	1.01	-	37.51	13.37	35.74
AV	15.913G	45.72	54.00	-8.28	30.51	3	Vertical	120	1.01	-	37.57	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

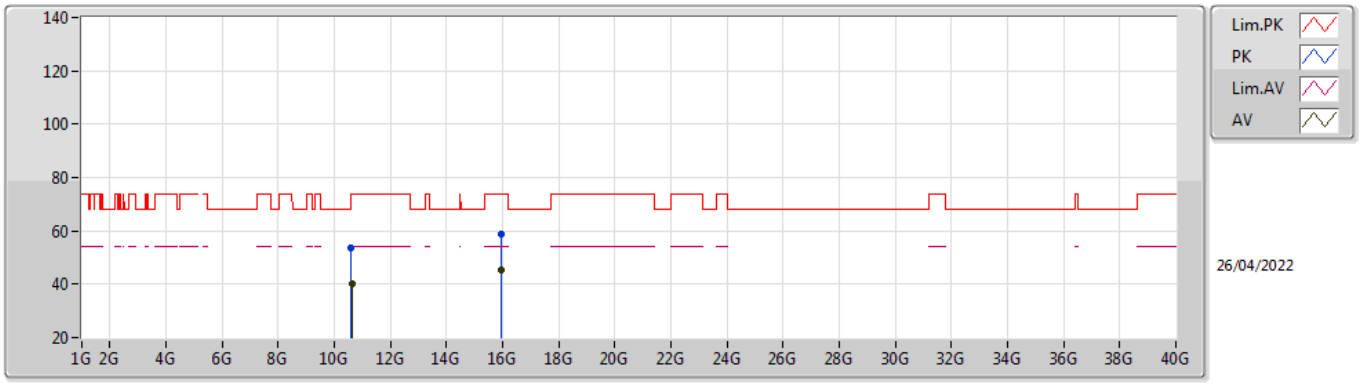


EUT X_1TX
Setting 17.75
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.606G	53.66	74.00	-20.34	40.24	3	Horizontal	176	1.94	-	38.21	10.59	35.38
AV	10.66G	40.38	54.00	-13.62	26.79	3	Horizontal	176	1.94	-	38.32	10.60	35.33
PK	15.95136G	58.84	74.00	-15.16	43.71	3	Horizontal	70	2.09	-	37.50	13.38	35.75
AV	15.95088G	45.37	54.00	-8.63	30.24	3	Horizontal	70	2.09	-	37.50	13.38	35.75

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

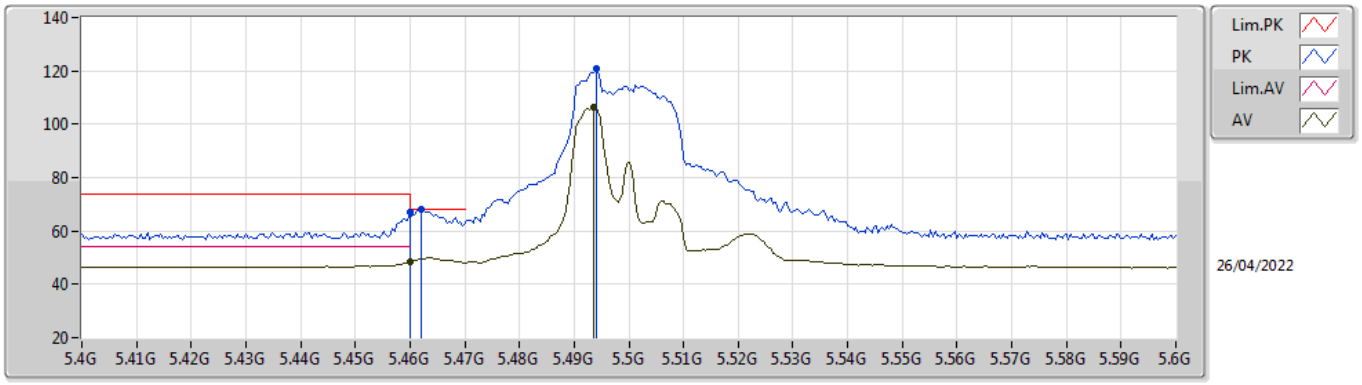


EUT X_1TX
Setting 18.75
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.46G	66.85	74.00	-7.15	60.42	3	Vertical	80	1.90	-	34.52	7.26	35.35
AV	5.46G	48.24	54.00	-5.76	41.81	3	Vertical	80	1.90	-	34.52	7.26	35.35
PK	5.462G	67.96	68.20	-0.24	61.53	3	Vertical	80	1.90	-	34.52	7.26	35.35
PK	5.494G	120.92	Inf	-Inf	114.39	3	Vertical	80	1.90	-	34.59	7.29	35.35
AV	5.4936G	106.52	Inf	-Inf	99.99	3	Vertical	80	1.90	-	34.59	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

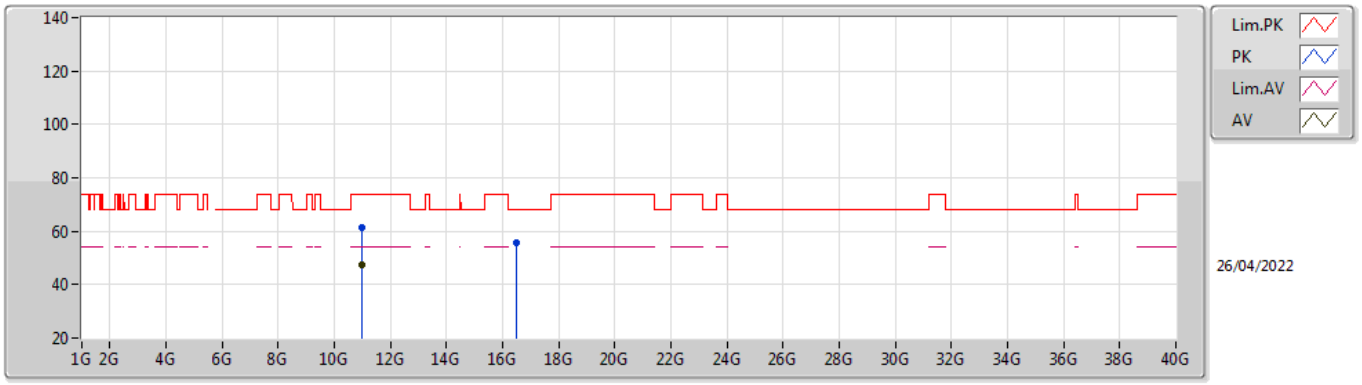


EUT X_1TX
Setting 18.75
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.986G	61.20	74.00	-12.80	47.21	3	Vertical	177	2.80	-	38.39	10.65	35.05
AV	10.986G	47.50	54.00	-6.50	33.51	3	Vertical	177	2.80	-	38.39	10.65	35.05
PK	16.5074G	55.46	68.20	-12.74	38.61	3	Vertical	177	2.80	-	38.44	13.76	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

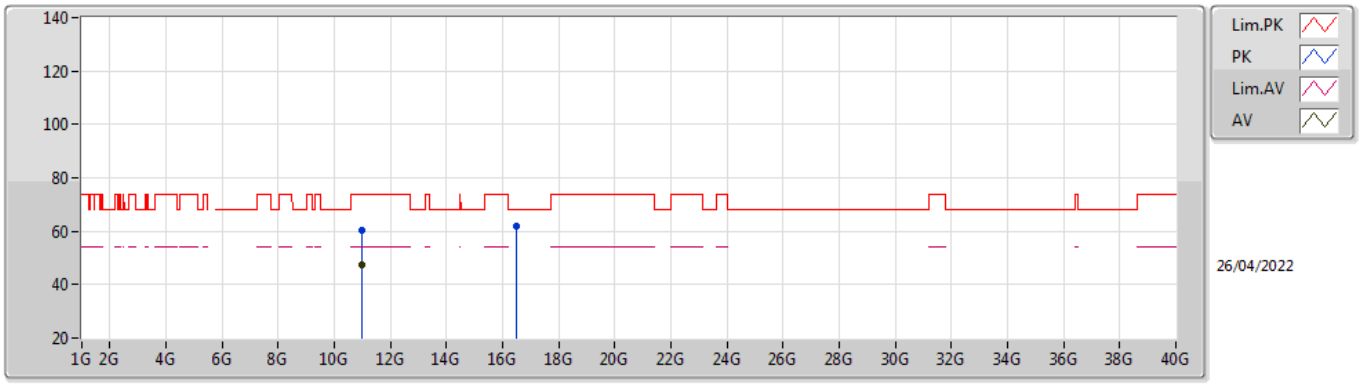


EUT X_1TX
Setting 18.75
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9862G	60.32	74.00	-13.68	46.33	3	Horizontal	125	2.20	-	38.39	10.65	35.05
AV	10.986G	47.51	54.00	-6.49	33.52	3	Horizontal	125	2.20	-	38.39	10.65	35.05
PK	16.5108G	61.78	68.20	-6.42	44.92	3	Horizontal	343	1.90	-	38.45	13.76	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

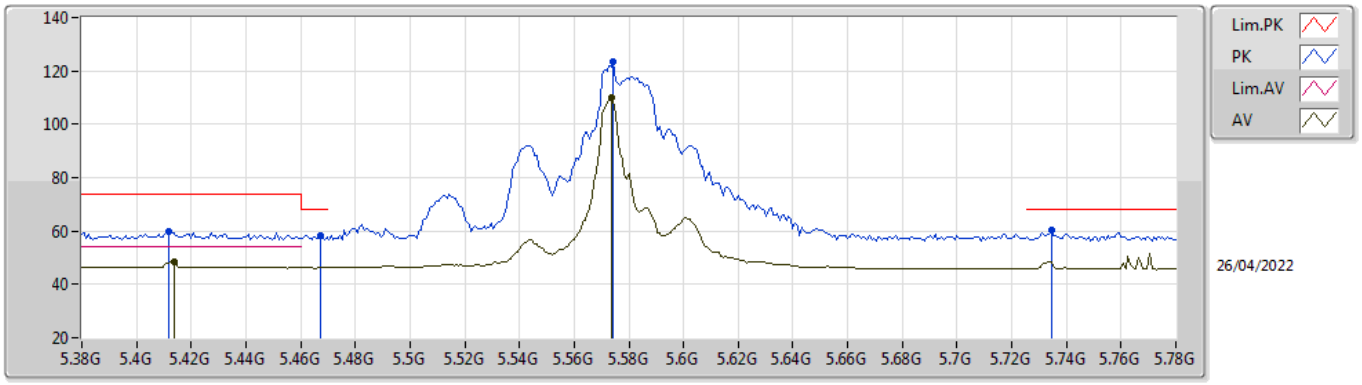


EUT X_1TX
Setting 21.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.412G	59.80	74.00	-14.20	53.36	3	Vertical	81	1.92	-	34.58	7.21	35.35
AV	5.4136G	48.31	54.00	-5.69	41.88	3	Vertical	81	1.92	-	34.57	7.21	35.35
PK	5.4672G	58.43	68.20	-9.77	51.98	3	Vertical	81	1.92	-	34.53	7.27	35.35
PK	5.5744G	123.44	Inf	-Inf	116.86	3	Vertical	81	1.92	-	34.60	7.37	35.39
AV	5.5736G	109.97	Inf	-Inf	103.39	3	Vertical	81	1.92	-	34.60	7.37	35.39
PK	5.7344G	60.25	68.20	-7.95	54.09	3	Vertical	81	1.92	-	34.23	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

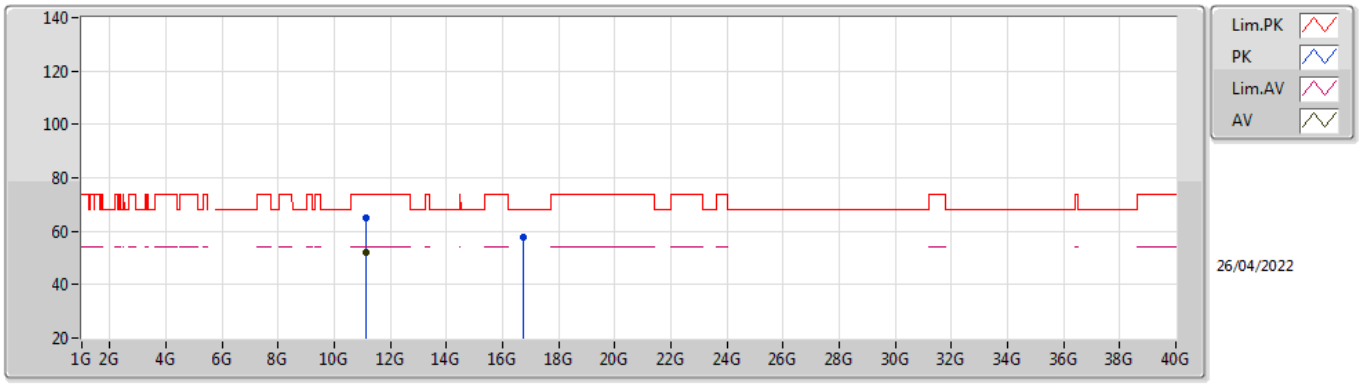


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1462G	64.90	74.00	-9.10	50.88	3	Vertical	174	3.00	-	38.55	10.67	35.20
AV	11.1462G	52.18	54.00	-1.82	38.16	3	Vertical	174	3.00	-	38.55	10.67	35.20
PK	16.7552G	57.51	68.20	-10.69	39.59	3	Vertical	235	2.11	-	39.09	13.93	35.10

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

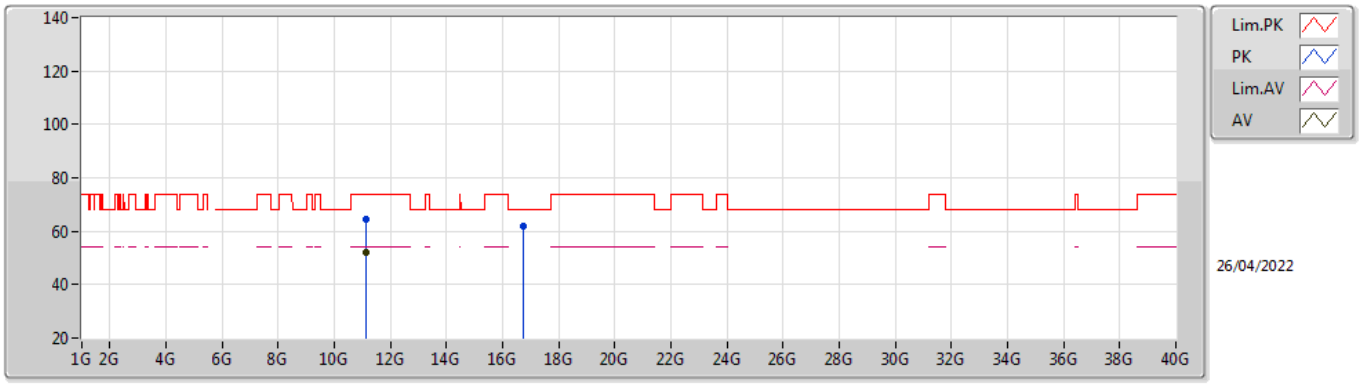


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1456G	64.58	74.00	-9.42	50.56	3	Horizontal	235	2.11	-	38.55	10.67	35.20
AV	11.1462G	52.01	54.00	-1.99	37.99	3	Horizontal	235	2.11	-	38.55	10.67	35.20
PK	16.7566G	62.14	68.20	-6.06	44.21	3	Horizontal	135	1.19	-	39.10	13.93	35.10

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

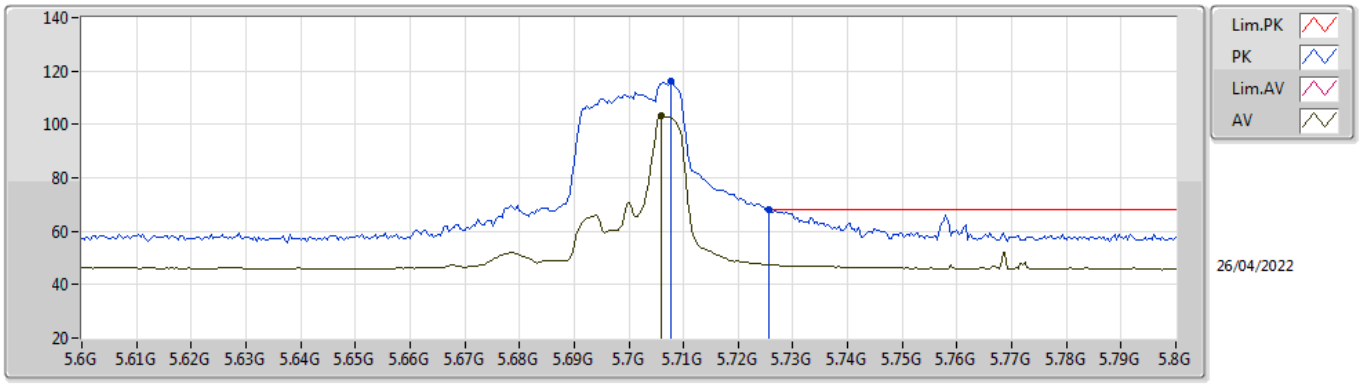


EUT X_1TX
Setting 15.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7076G	116.12	Inf	-Inf	109.89	3	Vertical	81	1.87	-	34.28	7.40	35.45
AV	5.706G	103.38	Inf	-Inf	97.14	3	Vertical	81	1.87	-	34.29	7.40	35.45
PK	5.7256G	68.05	68.20	-0.15	61.86	3	Vertical	81	1.87	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

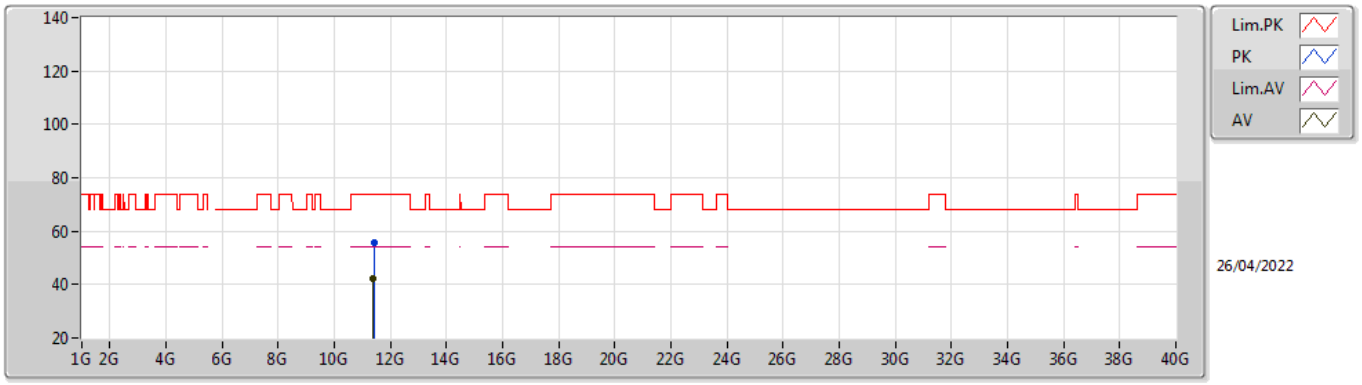


EUT X_1TX
Setting 15.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4038G	55.64	74.00	-18.36	41.61	3	Vertical	233	2.19	-	38.81	10.71	35.49
AV	11.3938G	42.01	54.00	-11.99	27.99	3	Vertical	233	2.19	-	38.79	10.71	35.48

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

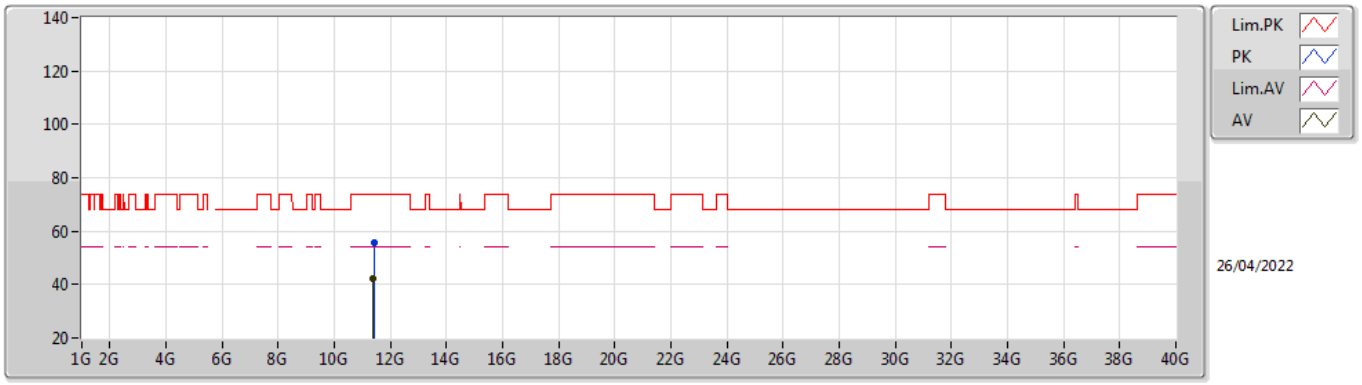


EUT X_1TX
Setting 15.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4152G	55.83	74.00	-18.17	41.80	3	Horizontal	85	2.62	-	38.83	10.71	35.51
AV	11.384G	42.00	54.00	-12.00	27.98	3	Horizontal	85	2.62	-	38.78	10.71	35.47

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

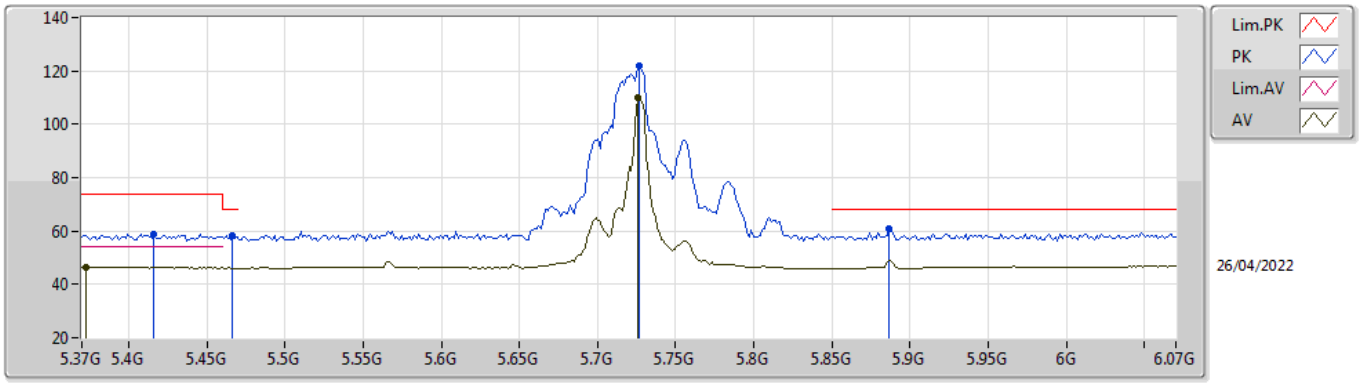


EUT X_1TX
Setting 21.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4162G	58.84	74.00	-15.16	52.40	3	Vertical	83	1.85	-	34.57	7.22	35.35
AV	5.3728G	46.39	54.00	-7.61	39.98	3	Vertical	83	1.85	-	34.55	7.20	35.34
PK	5.4666G	58.26	68.20	-9.94	51.81	3	Vertical	83	1.85	-	34.53	7.27	35.35
PK	5.727G	121.90	Inf	-Inf	115.71	3	Vertical	83	1.85	-	34.25	7.40	35.46
AV	5.7256G	110.00	Inf	-Inf	103.81	3	Vertical	83	1.85	-	34.25	7.40	35.46
PK	5.8866G	60.73	68.20	-7.47	54.26	3	Vertical	83	1.85	-	34.52	7.49	35.54

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

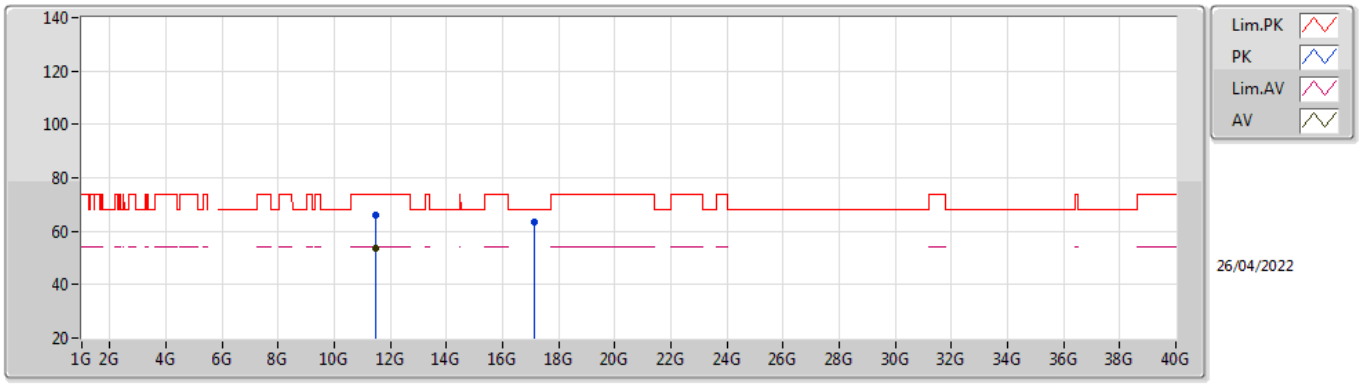


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4554G	65.82	74.00	-8.18	51.74	3	Vertical	181	2.67	-	38.91	10.72	35.55
AV	11.454G	53.38	54.00	-0.62	39.30	3	Vertical	181	2.67	-	38.91	10.72	35.55
PK	17.134G	63.41	68.20	-4.79	43.75	3	Vertical	360	1.80	-	40.34	14.19	34.87

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

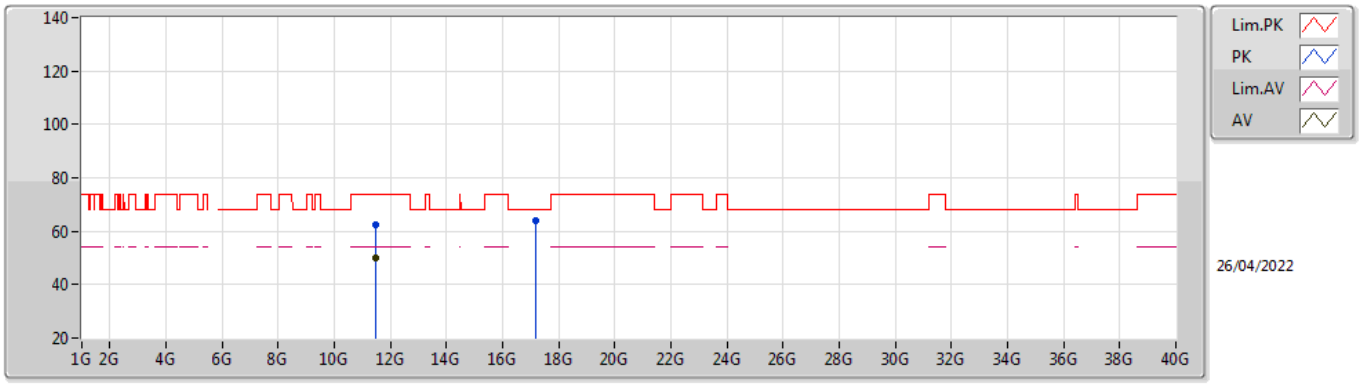


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4536G	62.35	74.00	-11.65	48.27	3	Horizontal	233	2.09	-	38.91	10.72	35.55
AV	11.4542G	49.79	54.00	-4.21	35.71	3	Horizontal	233	2.09	-	38.91	10.72	35.55
PK	17.1804G	64.03	68.20	-4.17	44.16	3	Horizontal	222	1.80	-	40.52	14.23	34.88

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

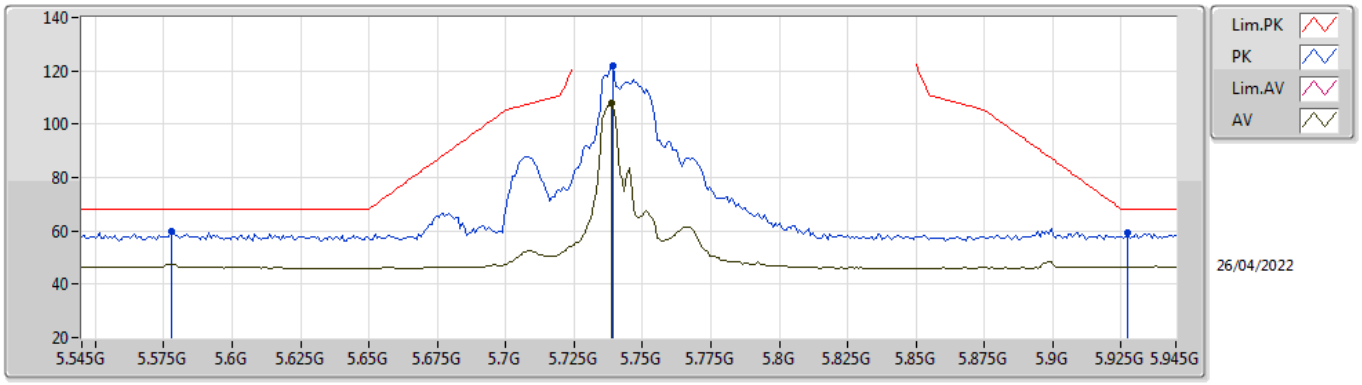


EUT X_1TX
Setting 20.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.5778G	59.64	68.20	-8.56	53.05	3	Vertical	83	1.86	-	34.60	7.38	35.39
PK	5.7394G	121.81	Inf	-Inf	115.66	3	Vertical	83	1.86	-	34.22	7.40	35.47
AV	5.7386G	107.86	Inf	-Inf	101.71	3	Vertical	83	1.86	-	34.22	7.40	35.47
PK	5.9274G	59.11	68.20	-9.09	52.43	3	Vertical	83	1.86	-	34.71	7.53	35.56

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

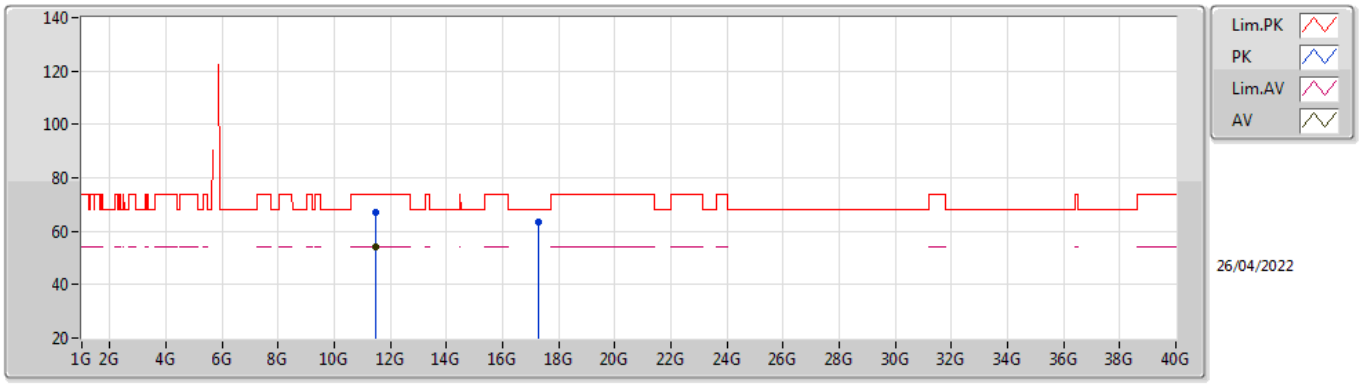


EUT X_1TX
Setting 20.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4762G	67.26	74.00	-6.74	53.16	3	Vertical	178	2.82	-	38.95	10.72	35.57
AV	11.4762G	53.90	54.00	-0.10	39.80	3	Vertical	178	2.82	-	38.95	10.72	35.57
PK	17.2694G	63.43	68.20	-4.77	43.01	3	Vertical	103	1.80	-	41.02	14.29	34.89

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

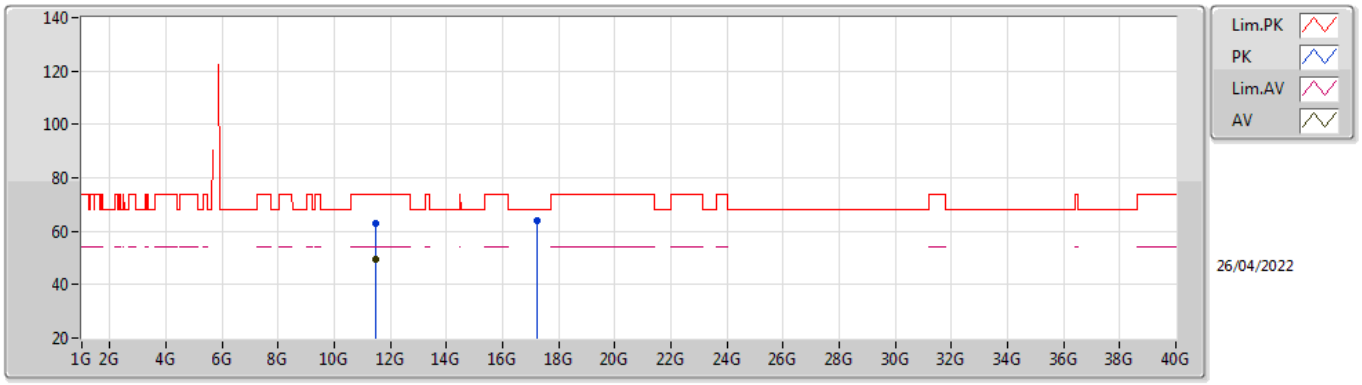


EUT X_1TX
Setting 20.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4758G	62.72	74.00	-11.28	48.62	3	Horizontal	182	2.20	-	38.95	10.72	35.57
AV	11.476G	49.47	54.00	-4.53	35.37	3	Horizontal	182	2.20	-	38.95	10.72	35.57
PK	17.2462G	63.72	68.20	-4.48	43.45	3	Horizontal	148	1.80	-	40.88	14.27	34.88

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

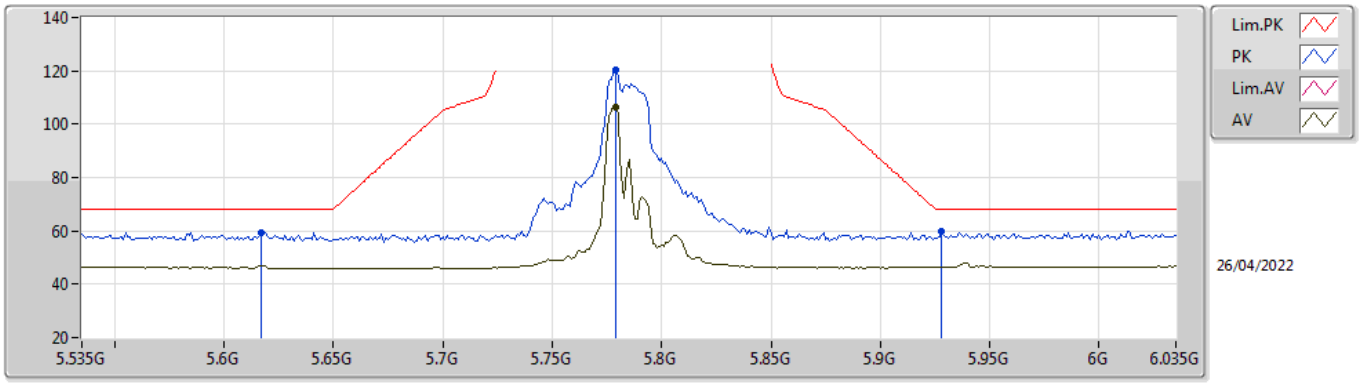


EUT X_1TX
Setting 19
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.617G	59.52	68.20	-8.68	52.96	3	Vertical	81	1.85	-	34.57	7.40	35.41
PK	5.779G	120.52	Inf	-Inf	114.41	3	Vertical	81	1.85	-	34.20	7.40	35.49
AV	5.779G	106.47	Inf	-Inf	100.36	3	Vertical	81	1.85	-	34.20	7.40	35.49
PK	5.928G	59.65	68.20	-8.55	52.97	3	Vertical	81	1.85	-	34.71	7.53	35.56

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

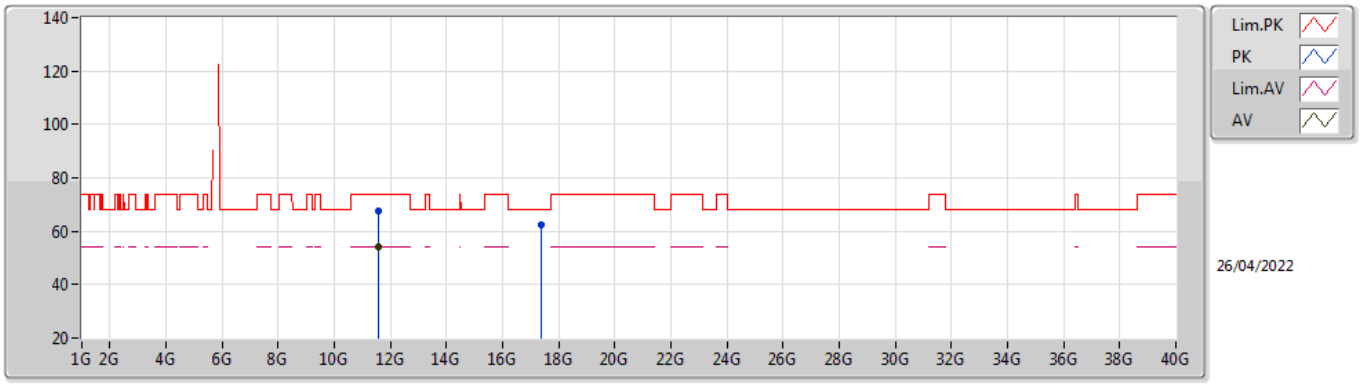


EUT X_1TX
Setting 19
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.556G	67.83	74.00	-6.17	53.47	3	Vertical	171	2.60	-	39.22	10.73	35.59
AV	11.556G	53.99	54.00	-0.01	39.63	3	Vertical	171	2.60	-	39.22	10.73	35.59
PK	17.4008G	62.16	68.20	-6.04	41.07	3	Vertical	0	2.08	-	41.61	14.38	34.90

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

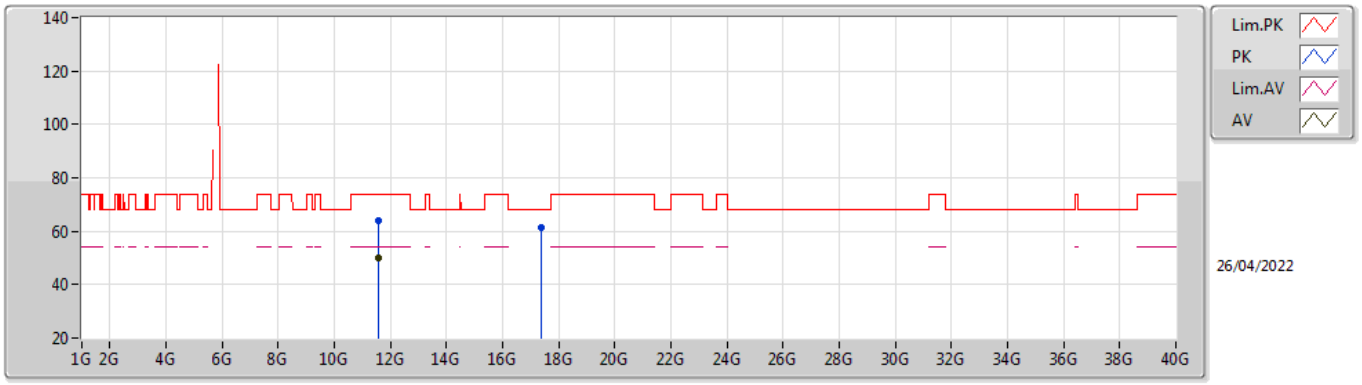


EUT X_1TX
Setting 19
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5562G	63.72	74.00	-10.28	49.36	3	Horizontal	187	2.16	-	39.22	10.73	35.59
AV	11.5562G	50.20	54.00	-3.80	35.84	3	Horizontal	187	2.16	-	39.22	10.73	35.59
PK	17.3616G	61.50	68.20	-6.70	40.60	3	Horizontal	62	1.80	-	41.45	14.35	34.90

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

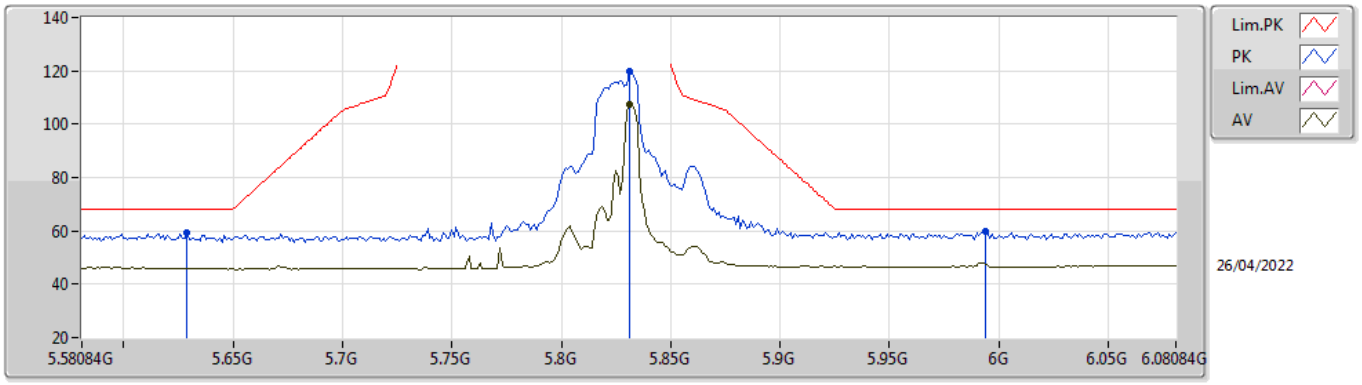


EUT X_1TX
Setting 19.25
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.62884G	59.24	68.20	-8.96	52.71	3	Vertical	81	1.80	-	34.54	7.40	35.41
PK	5.83084G	119.73	Inf	-Inf	113.56	3	Vertical	81	1.80	-	34.26	7.43	35.52
AV	5.83084G	107.37	Inf	-Inf	101.20	3	Vertical	81	1.80	-	34.26	7.43	35.52
PK	5.99384G	59.91	68.20	-8.29	53.12	3	Vertical	81	1.80	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

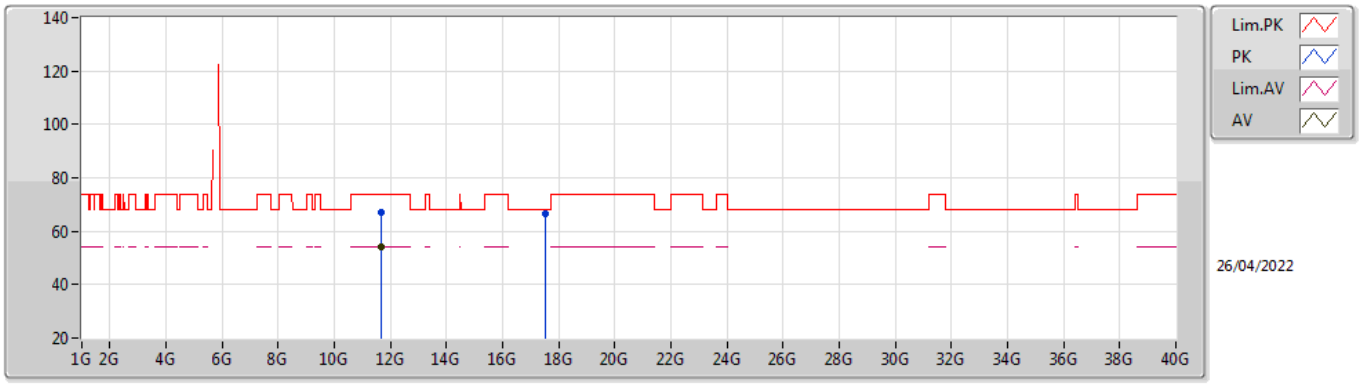


EUT X_1TX
Setting 19.25
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6642G	67.20	74.00	-6.80	52.61	3	Vertical	173	2.67	-	39.40	10.75	35.56
AV	11.664G	53.93	54.00	-0.07	39.34	3	Vertical	173	2.67	-	39.40	10.75	35.56
PK	17.5212G	66.31	68.20	-1.89	44.04	3	Vertical	0	2.64	-	42.71	14.46	34.90

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

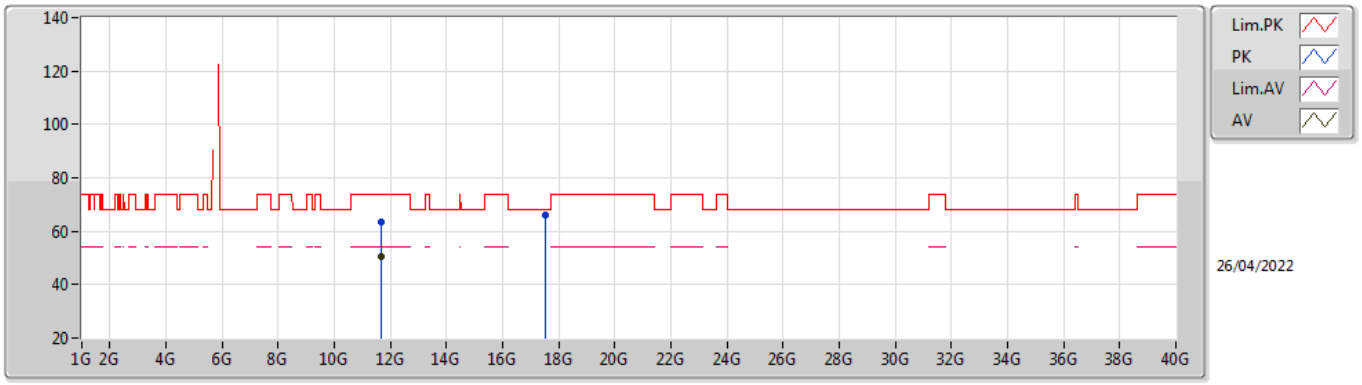

EUT X_1TX
Setting 19.25
03-C-C-6


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6638G	63.51	74.00	-10.49	48.92	3	Horizontal	191	2.08	-	39.40	10.75	35.56
AV	11.6638G	50.54	54.00	-3.46	35.95	3	Horizontal	191	2.08	-	39.40	10.75	35.56
PK	17.5084G	65.81	68.20	-2.39	43.68	3	Horizontal	136	1.80	-	42.58	14.46	34.91

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_1TX	Pass	PK	5.35G	73.96	74.00	-0.04	3	Vertical	80	1.97	-

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

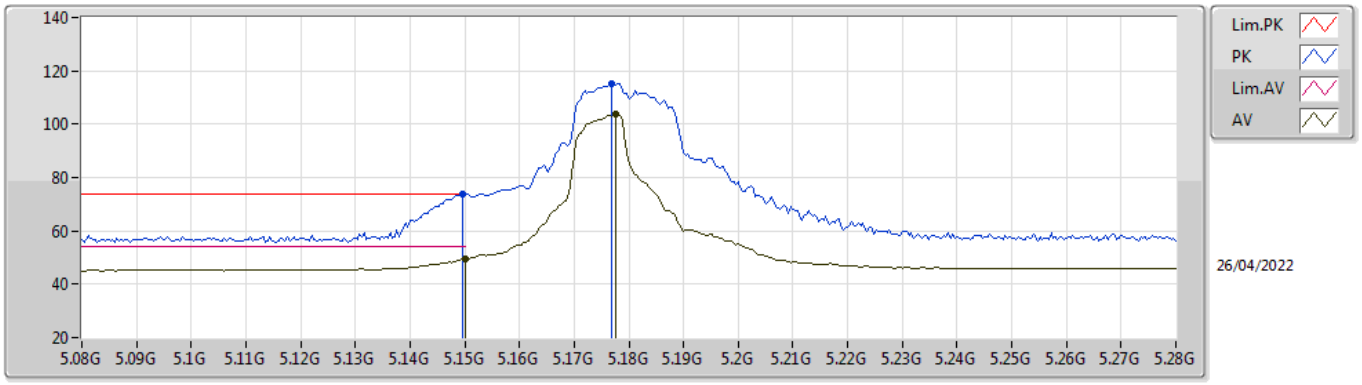


EUT X_1TX
Setting 19.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1496G	73.90	74.00	-0.10	68.07	3	Vertical	81	2.02	-	34.00	7.17	35.34
AV	5.15G	49.35	54.00	-4.65	43.52	3	Vertical	81	2.02	-	34.00	7.17	35.34
PK	5.1768G	115.25	Inf	-Inf	109.29	3	Vertical	81	2.02	-	34.11	7.19	35.34
AV	5.1776G	103.56	Inf	-Inf	97.60	3	Vertical	81	2.02	-	34.11	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

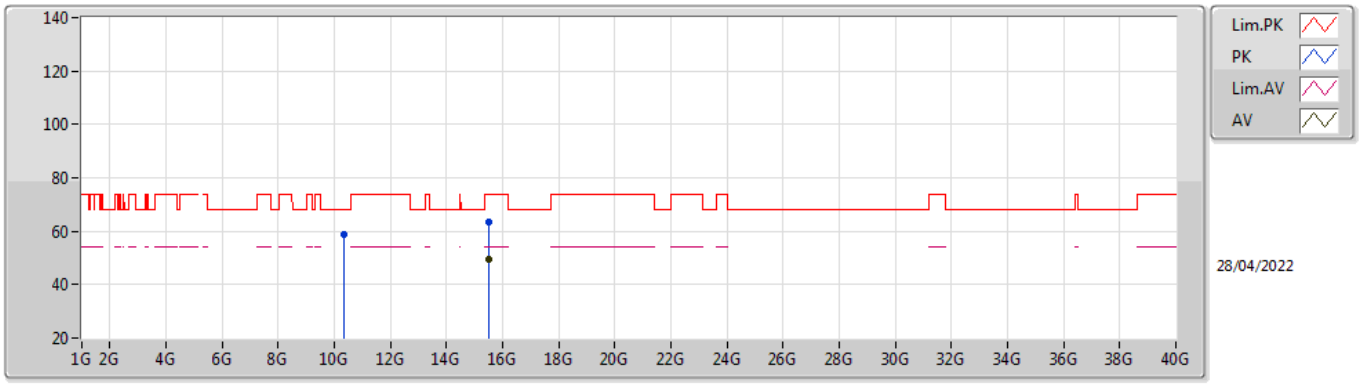


EUT X_1TX
Setting 19.5
06-F-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.35304G	59.03	68.20	-9.17	53.97	3	Vertical	182	1.02	-	39.41	8.22	42.57
PK	15.52812G	63.62	74.00	-10.38	57.06	3	Vertical	158	2.63	-	38.56	9.97	41.97
AV	15.5274G	49.35	54.00	-4.65	42.79	3	Vertical	158	2.63	-	38.56	9.97	41.97

802.11ax HEW20_Nss1,(MCS0)_1TX

5180MHz_TnomVnom

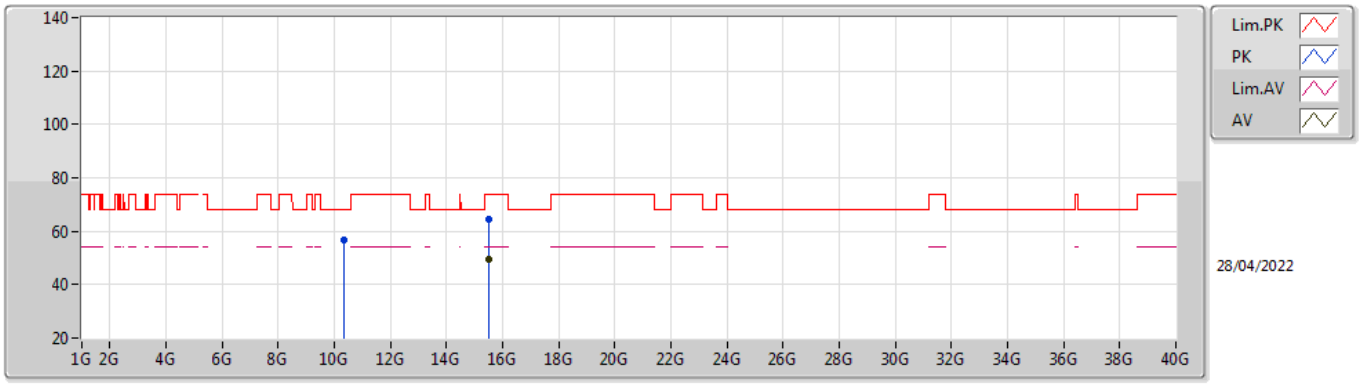


EUT X_1TX
Setting 19.5
06-F-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.35892G	56.64	68.20	-11.56	51.57	3	Horizontal	128	2.16	-	39.42	8.22	42.57
PK	15.52848G	64.35	74.00	-9.65	57.79	3	Horizontal	156	1.95	-	38.56	9.97	41.97
AV	15.52746G	49.74	54.00	-4.26	43.18	3	Horizontal	156	1.95	-	38.56	9.97	41.97

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

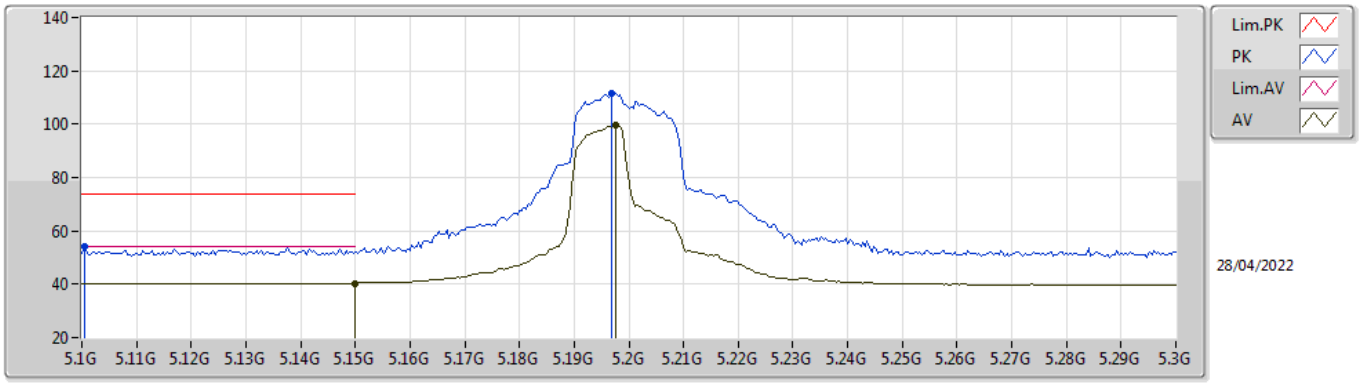


EUT X_1TX
Setting 17
06-F-S-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1004G	53.88	74.00	-20.12	59.48	3	Vertical	80	1.83	-	32.00	5.50	43.10
AV	5.15G	40.40	54.00	-13.60	46.25	3	Vertical	80	1.83	-	31.70	5.53	43.08
PK	5.1968G	111.66	Inf	-Inf	117.74	3	Vertical	80	1.83	-	31.42	5.56	43.06
AV	5.1976G	99.54	Inf	-Inf	105.63	3	Vertical	80	1.83	-	31.41	5.56	43.06

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

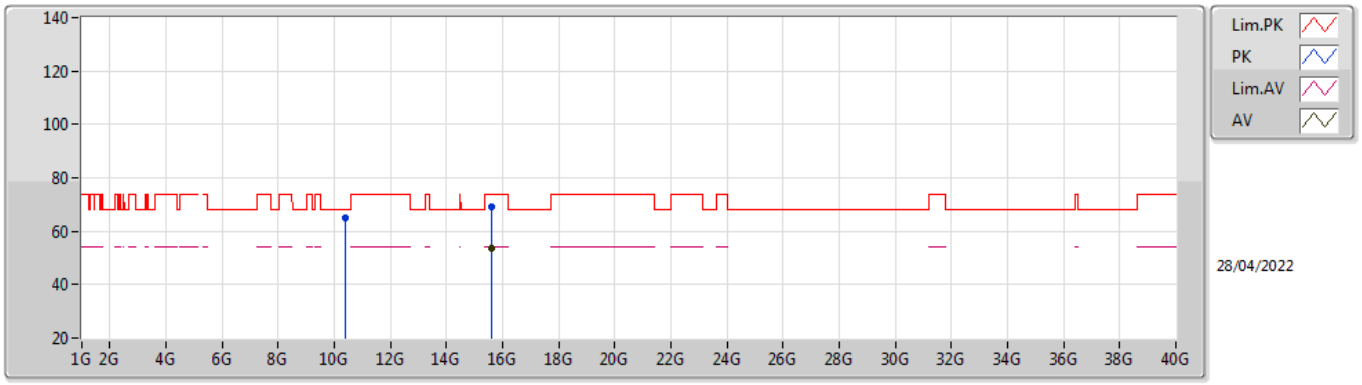


EUT X_1TX
Setting 17
06-F-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.3928G	65.04	68.20	-3.16	51.37	3	Vertical	172	1.30	-	39.49	8.24	34.06
PK	15.58872G	69.00	74.00	-5.00	55.02	3	Vertical	157	2.42	-	38.26	9.98	34.26
AV	15.58722G	53.67	54.00	-0.33	39.68	3	Vertical	157	2.42	-	38.26	9.98	34.25

802.11ax HEW20_Nss1,(MCS0)_1TX

5200MHz_TnomVnom

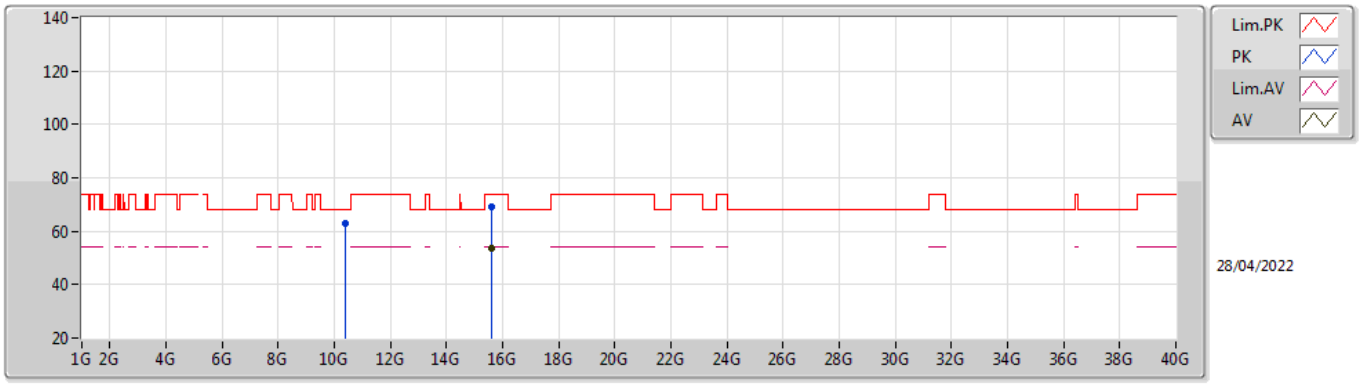


EUT X_1TX
Setting 17
06-F-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.39064G	62.69	68.20	-5.51	49.03	3	Horizontal	128	2.23	-	39.48	8.24	34.06
PK	15.58866G	69.02	74.00	-4.98	55.04	3	Horizontal	157	1.89	-	38.26	9.98	34.26
AV	15.58728G	53.56	54.00	-0.44	39.57	3	Horizontal	157	1.89	-	38.26	9.98	34.25

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

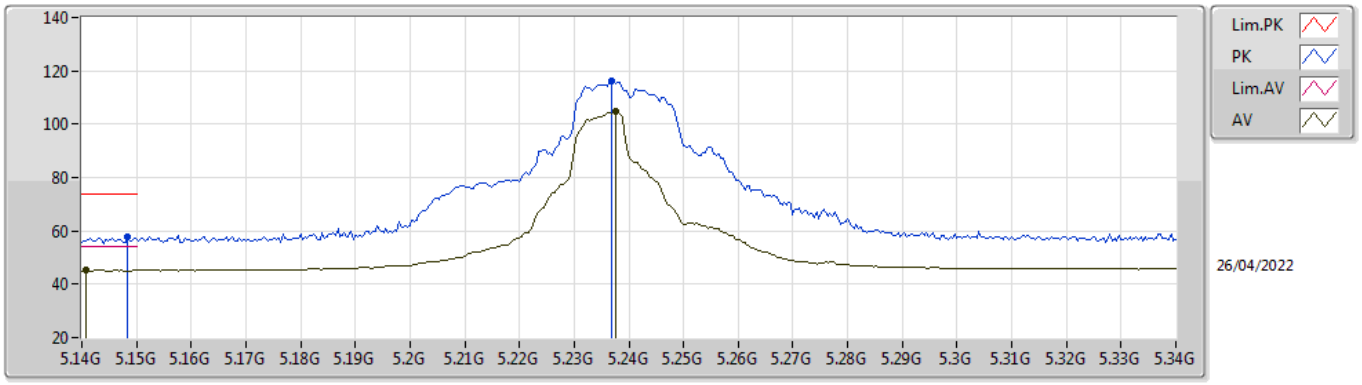


EUT X_1TX
Setting 21.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1484G	57.90	74.00	-16.10	52.07	3	Vertical	80	1.80	-	34.00	7.17	35.34
AV	5.1408G	45.27	54.00	-8.73	39.46	3	Vertical	80	1.80	-	33.98	7.17	35.34
PK	5.2368G	115.97	Inf	-Inf	109.76	3	Vertical	80	1.80	-	34.35	7.20	35.34
AV	5.2376G	104.59	Inf	-Inf	98.38	3	Vertical	80	1.80	-	34.35	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

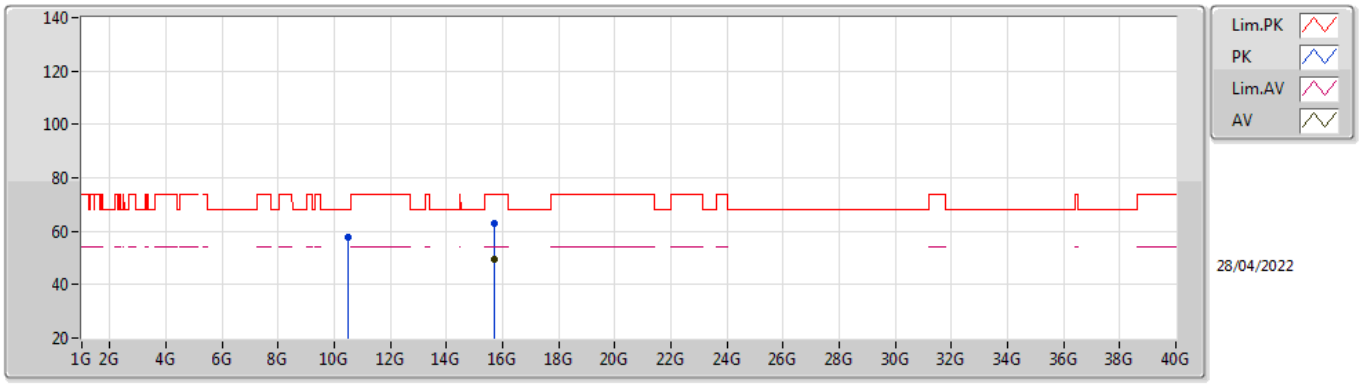


EUT X_1TX
Setting 21.5
06-F-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.47118G	57.98	68.20	-10.22	52.72	3	Vertical	193	1.66	-	39.57	8.29	42.60
PK	15.708G	63.18	74.00	-10.82	57.29	3	Vertical	164	2.41	-	37.80	10.00	41.91
AV	15.70734G	49.70	54.00	-4.30	43.81	3	Vertical	164	2.41	-	37.80	10.00	41.91

802.11ax HEW20_Nss1,(MCS0)_1TX

5240MHz_TnomVnom

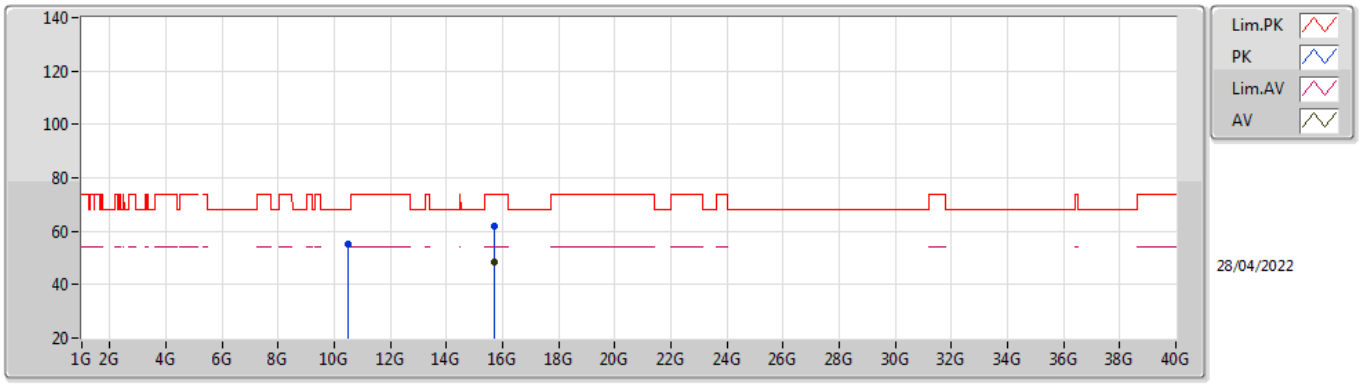


EUT X_1TX
Setting 21.5
06-F-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.47448G	55.30	68.20	-12.90	50.04	3	Horizontal	134	2.18	-	39.57	8.29	42.60
PK	15.70812G	62.03	74.00	-11.97	56.14	3	Horizontal	225	1.97	-	37.80	10.00	41.91
AV	15.70734G	48.41	54.00	-5.59	42.52	3	Horizontal	225	1.97	-	37.80	10.00	41.91

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

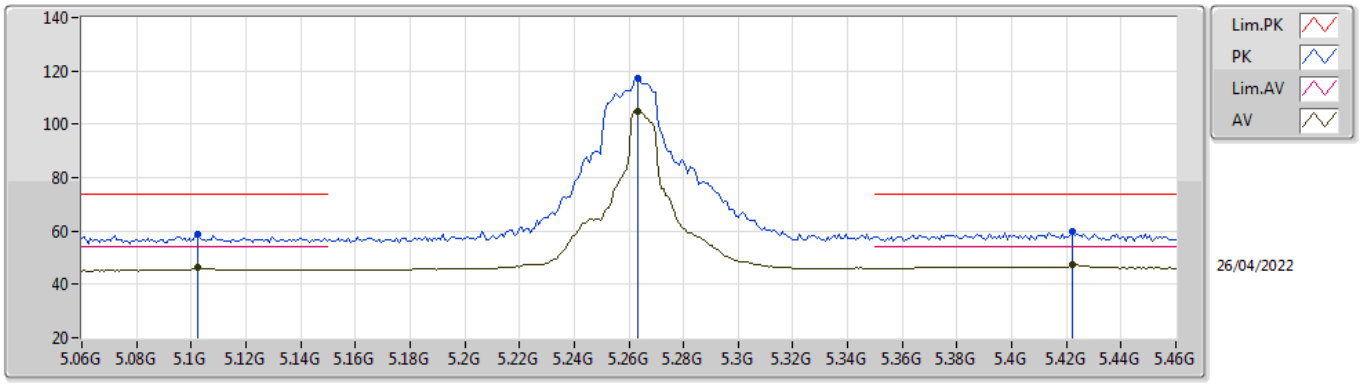


EUT X_1TX
Setting 21.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1024G	58.81	74.00	-15.19	53.09	3	Vertical	81	2.02	-	33.90	7.15	35.33
AV	5.1024G	46.18	54.00	-7.82	40.46	3	Vertical	81	2.02	-	33.90	7.15	35.33
PK	5.2632G	117.05	Inf	-Inf	110.76	3	Vertical	81	2.02	-	34.43	7.20	35.34
AV	5.2632G	105.07	Inf	-Inf	98.78	3	Vertical	81	2.02	-	34.43	7.20	35.34
PK	5.4224G	59.73	74.00	-14.27	53.30	3	Vertical	81	2.02	-	34.56	7.22	35.35
AV	5.4224G	47.59	54.00	-6.41	41.16	3	Vertical	81	2.02	-	34.56	7.22	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

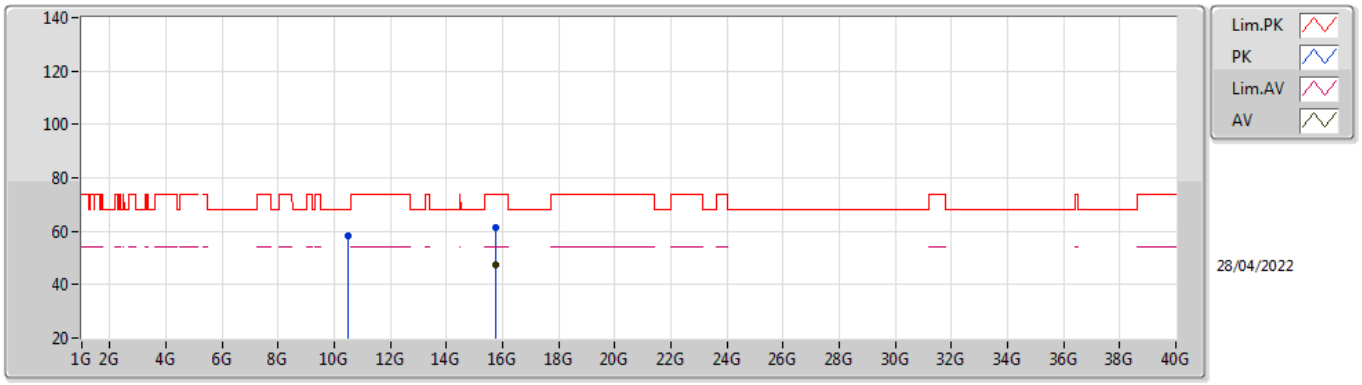


EUT X_1TX
Setting 21.5
06-F-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.51118G	58.40	68.20	-9.80	53.09	3	Vertical	191	1.34	-	39.61	8.31	42.61
PK	15.76872G	61.47	74.00	-12.53	55.54	3	Vertical	165	2.42	-	37.80	10.02	41.89
AV	15.7674G	47.35	54.00	-6.65	41.42	3	Vertical	165	2.42	-	37.80	10.02	41.89

802.11ax HEW20_Nss1,(MCS0)_1TX

5260MHz_TnomVnom

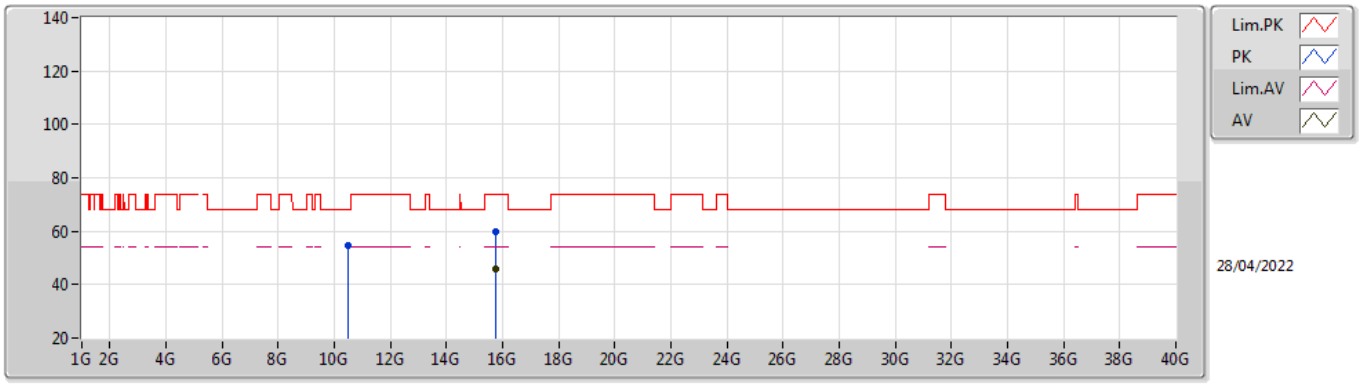


EUT X_1TX
Setting 21.5
06-F-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.51166G	54.80	68.20	-13.40	49.49	3	Horizontal	282	1.16	-	39.61	8.31	42.61
PK	15.76902G	59.78	74.00	-14.22	53.85	3	Horizontal	222	1.88	-	37.80	10.02	41.89
AV	15.7674G	45.74	54.00	-8.26	39.81	3	Horizontal	222	1.88	-	37.80	10.02	41.89

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

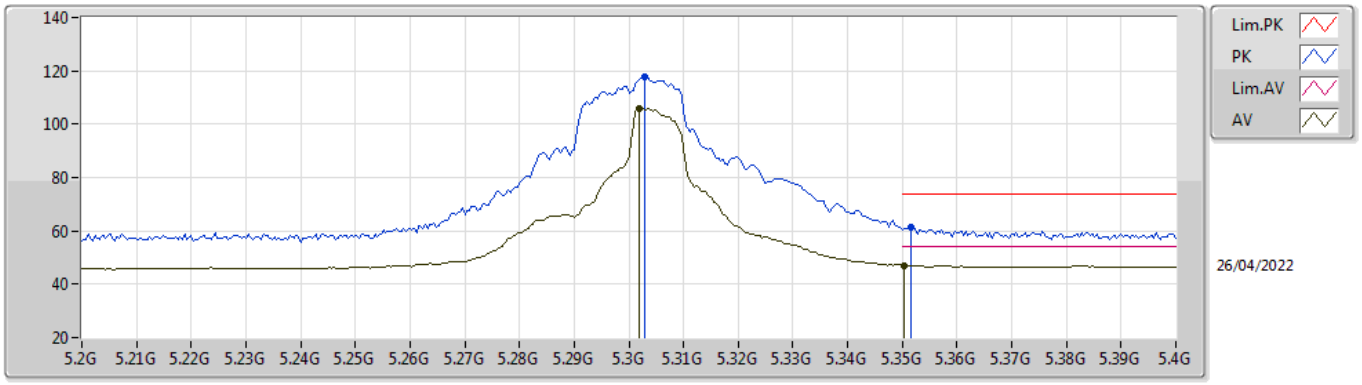


EUT X_1TX
Setting 21.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3028G	117.94	Inf	-Inf	111.58	3	Vertical	81	1.99	-	34.50	7.20	35.34
AV	5.302G	105.96	Inf	-Inf	99.60	3	Vertical	81	1.99	-	34.50	7.20	35.34
PK	5.3516G	61.33	74.00	-12.67	54.97	3	Vertical	81	1.99	-	34.50	7.20	35.34
AV	5.3504G	47.07	54.00	-6.93	40.71	3	Vertical	81	1.99	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

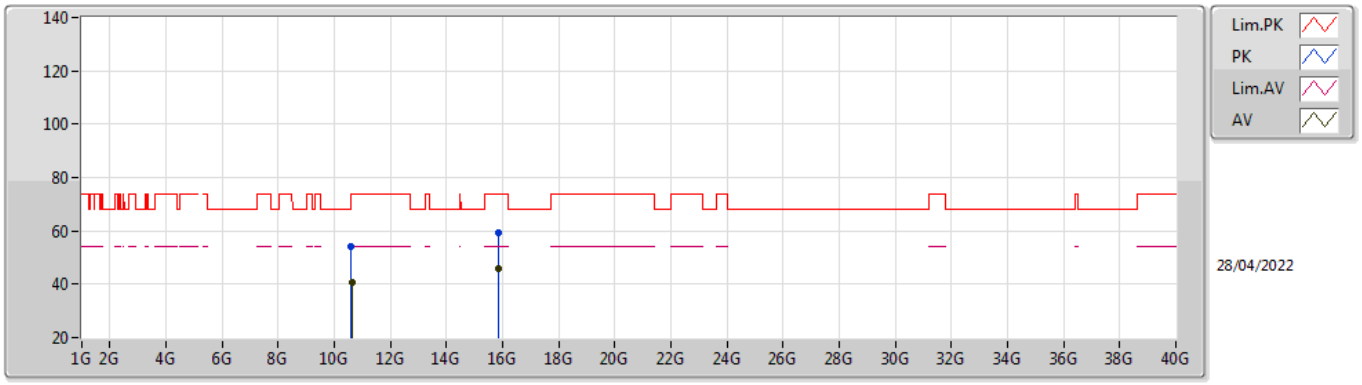


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6138G	54.33	74.00	-19.67	40.88	3	Vertical	2	2.25	-	38.23	10.59	35.37
AV	10.6485G	40.59	54.00	-13.41	27.03	3	Vertical	2	2.25	-	38.30	10.60	35.34
PK	15.86G	59.30	74.00	-14.70	43.92	3	Vertical	360	1.94	-	37.72	13.33	35.67
AV	15.8562G	45.86	54.00	-8.14	30.47	3	Vertical	360	1.94	-	37.73	13.33	35.67

802.11ax HEW20_Nss1,(MCS0)_1TX

5300MHz_TnomVnom

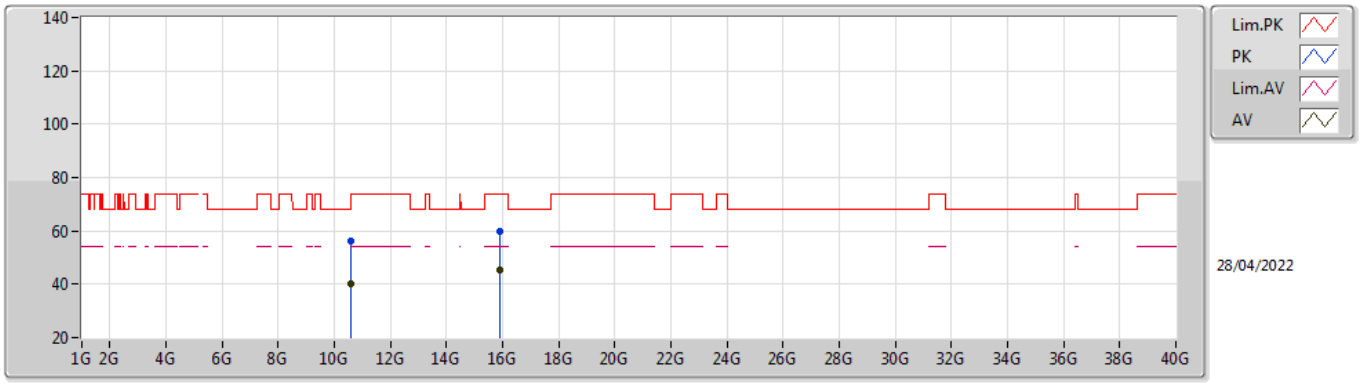


EUT X_1TX
Setting 21.5
06-F-S-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
AV	10.60961G	39.93	54.00	-14.07	34.49	3	Horizontal	290	1.80	-	39.69	8.37	42.62
PK	10.61036G	56.44	74.00	-17.56	51.00	3	Horizontal	290	1.80	-	39.69	8.37	42.62
PK	15.88842G	59.87	74.00	-14.13	54.07	3	Horizontal	157	1.87	-	37.62	10.04	41.86
AV	15.88728G	45.43	54.00	-8.57	39.62	3	Horizontal	157	1.87	-	37.63	10.04	41.86

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

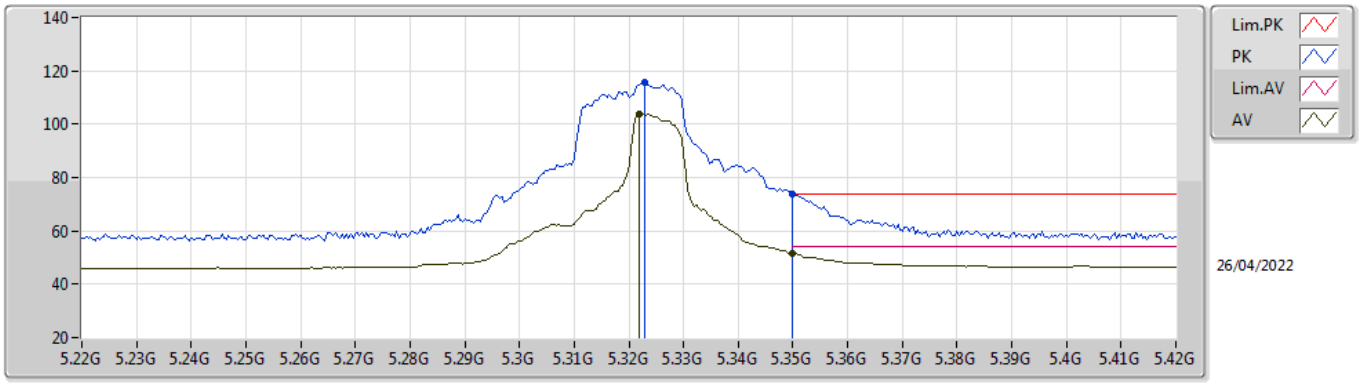


EUT X_1TX
Setting 19
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3228G	115.50	Inf	-Inf	109.14	3	Vertical	80	1.97	-	34.50	7.20	35.34
AV	5.322G	103.80	Inf	-Inf	97.44	3	Vertical	80	1.97	-	34.50	7.20	35.34
PK	5.35G	73.96	74.00	-0.04	67.60	3	Vertical	80	1.97	-	34.50	7.20	35.34
AV	5.35G	51.75	54.00	-2.25	45.39	3	Vertical	80	1.97	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

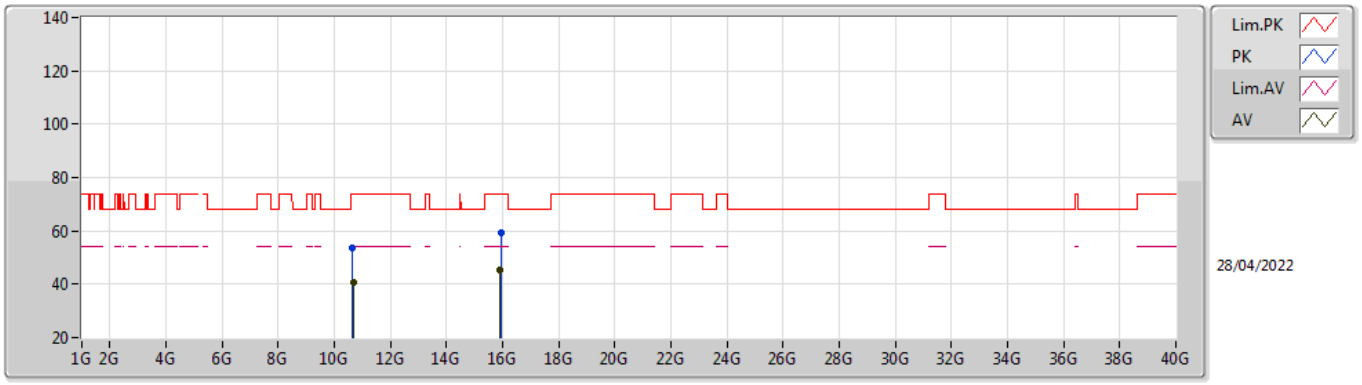


EUT X_1TX
Setting 19
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6582G	53.56	74.00	-20.44	39.97	3	Vertical	57	1.74	-	38.32	10.60	35.33
AV	10.6838G	40.66	54.00	-13.34	27.00	3	Vertical	57	1.74	-	38.37	10.60	35.31
PK	15.9392G	59.44	74.00	-14.56	44.29	3	Vertical	265	2.52	-	37.52	13.37	35.74
AV	15.9132G	45.27	54.00	-8.73	30.06	3	Vertical	265	2.52	-	37.57	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5320MHz_TnomVnom

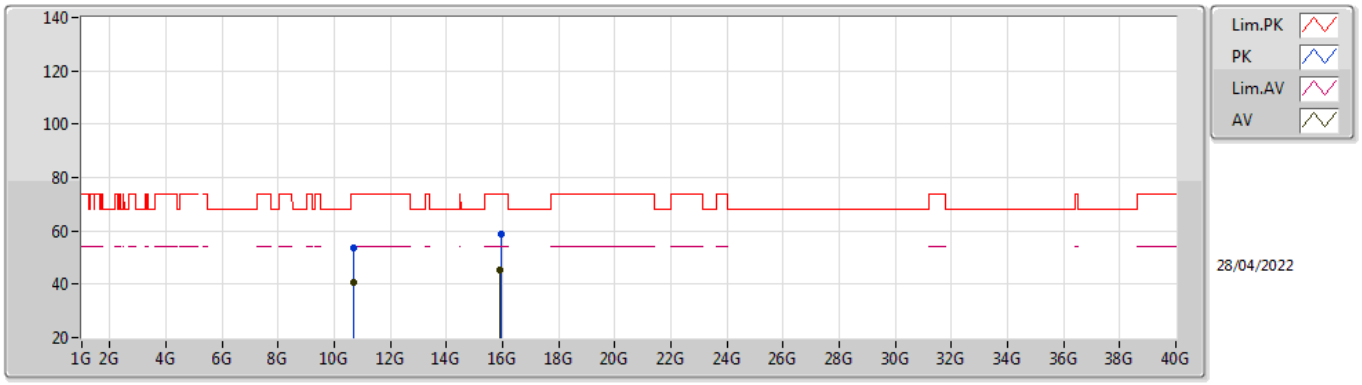


EUT X_1TX
Setting 19
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6876G	53.79	74.00	-20.21	40.12	3	Horizontal	11	1.01	-	38.38	10.60	35.31
AV	10.687G	40.62	54.00	-13.38	26.96	3	Horizontal	11	1.01	-	38.37	10.60	35.31
PK	15.9344G	58.59	74.00	-15.41	43.42	3	Horizontal	274	1.68	-	37.53	13.37	35.73
AV	15.9162G	45.31	54.00	-8.69	30.10	3	Horizontal	274	1.68	-	37.57	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

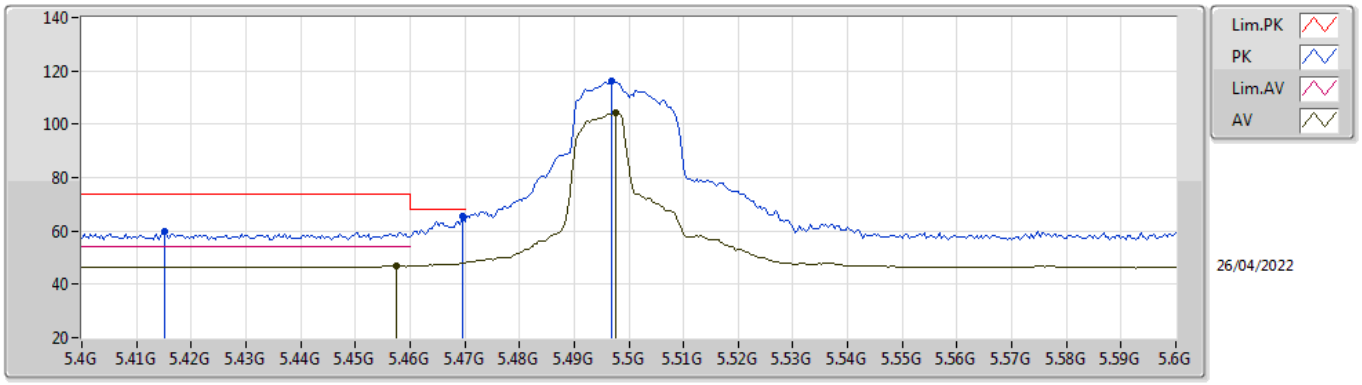


EUT X_1TX
Setting 17.75
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4152G	59.62	74.00	-14.38	53.18	3	Vertical	80	1.92	-	34.57	7.22	35.35
PK	5.4696G	65.32	68.20	-2.88	58.86	3	Vertical	80	1.92	-	34.54	7.27	35.35
AV	5.4576G	47.10	54.00	-6.90	40.67	3	Vertical	80	1.92	-	34.52	7.26	35.35
PK	5.4968G	116.32	Inf	-Inf	109.78	3	Vertical	80	1.92	-	34.59	7.30	35.35
AV	5.4976G	104.10	Inf	-Inf	97.55	3	Vertical	80	1.92	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

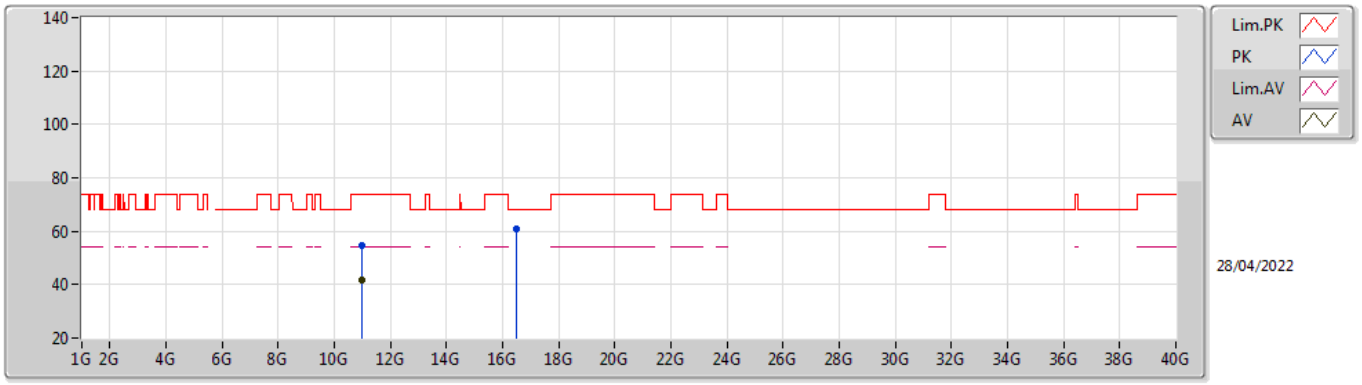


EUT X_1TX
Setting 17.75
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9878G	54.66	74.00	-19.34	40.67	3	Vertical	82	2.94	-	38.39	10.65	35.05
AV	11.0026G	41.54	54.00	-12.46	27.53	3	Vertical	82	2.94	-	38.40	10.65	35.04
PK	16.4752G	60.78	68.20	-7.42	44.20	3	Vertical	263	2.83	-	38.23	13.73	35.38

802.11ax HEW20_Nss1,(MCS0)_1TX

5500MHz_TnomVnom

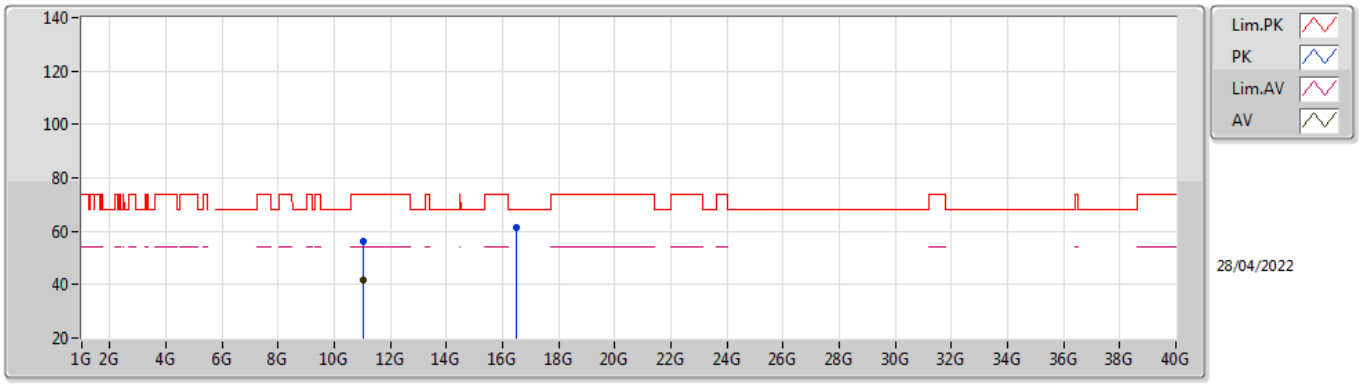


EUT X_1TX
Setting 17.75
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0464G	56.02	74.00	-17.98	42.00	3	Horizontal	185	1.69	-	38.45	10.66	35.09
AV	11.0082G	41.56	54.00	-12.44	27.55	3	Horizontal	185	1.69	-	38.41	10.65	35.05
PK	16.4956G	61.34	68.20	-6.86	44.58	3	Horizontal	145	1.22	-	38.37	13.75	35.36

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

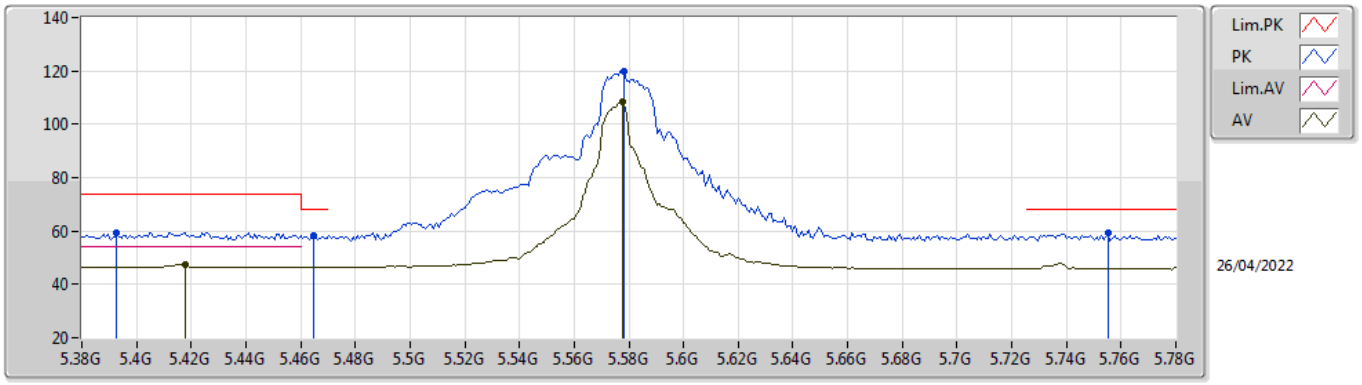


EUT X_1TX
Setting 21.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3928G	59.42	74.00	-14.58	52.98	3	Vertical	82	1.90	-	34.59	7.20	35.35
AV	5.4176G	47.64	54.00	-6.36	41.21	3	Vertical	82	1.90	-	34.56	7.22	35.35
PK	5.4648G	58.12	68.20	-10.08	51.68	3	Vertical	82	1.90	-	34.53	7.26	35.35
PK	5.5784G	119.70	Inf	-Inf	113.11	3	Vertical	82	1.90	-	34.60	7.38	35.39
AV	5.5776G	108.38	Inf	-Inf	101.79	3	Vertical	82	1.90	-	34.60	7.38	35.39
PK	5.7552G	59.52	68.20	-8.68	53.40	3	Vertical	82	1.90	-	34.20	7.40	35.48

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

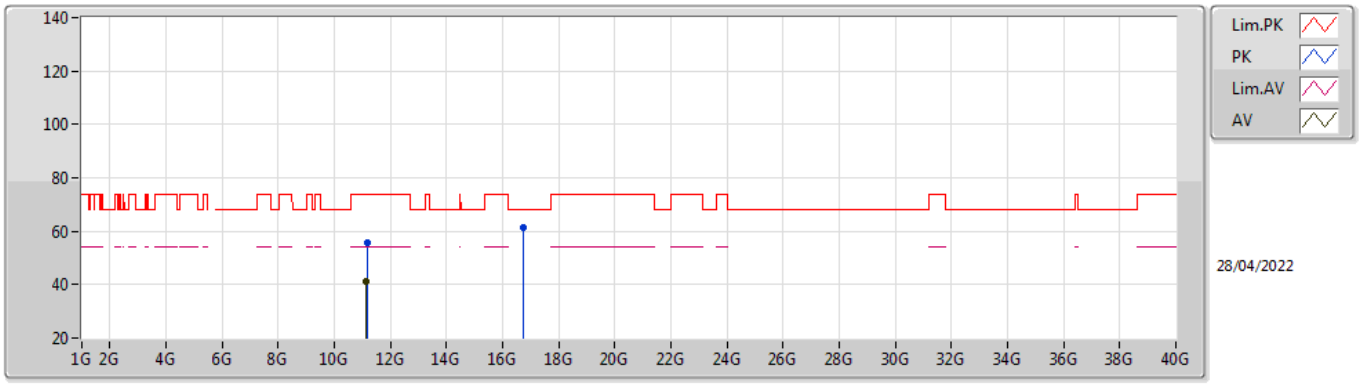


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.156G	55.50	74.00	-18.50	41.48	3	Vertical	286	2.12	-	38.56	10.67	35.21
AV	11.1182G	41.39	54.00	-12.61	27.37	3	Vertical	286	2.12	-	38.52	10.67	35.17
PK	16.74462G	61.40	68.20	-6.80	43.59	3	Vertical	236	1.80	-	39.01	13.92	35.12

802.11ax HEW20_Nss1,(MCS0)_1TX

5580MHz_TnomVnom

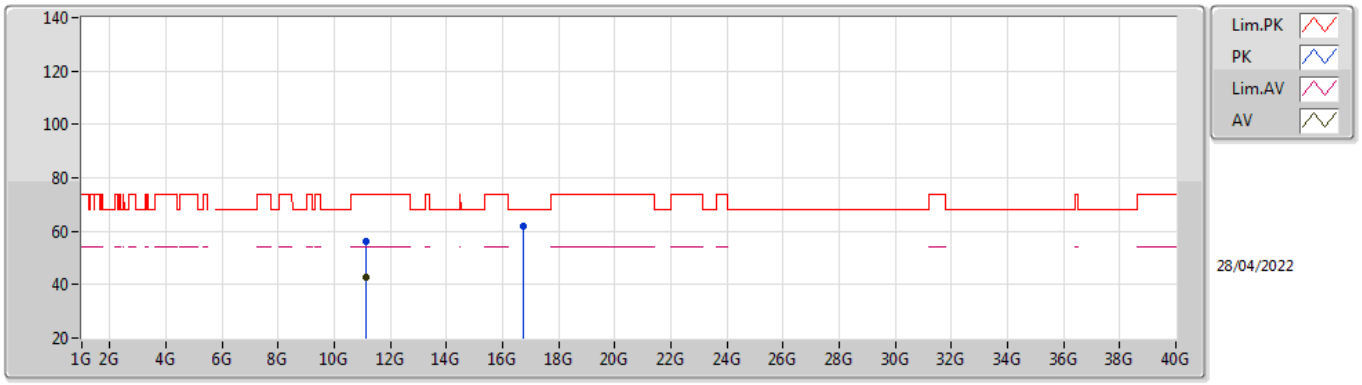


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.15256G	56.43	74.00	-17.57	42.42	3	Horizontal	231	2.17	-	38.55	10.67	35.21
AV	11.15118G	42.65	54.00	-11.35	28.64	3	Horizontal	231	2.17	-	38.55	10.67	35.21
PK	16.7328G	61.73	68.20	-6.47	44.02	3	Horizontal	91	1.80	-	38.93	13.91	35.13

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

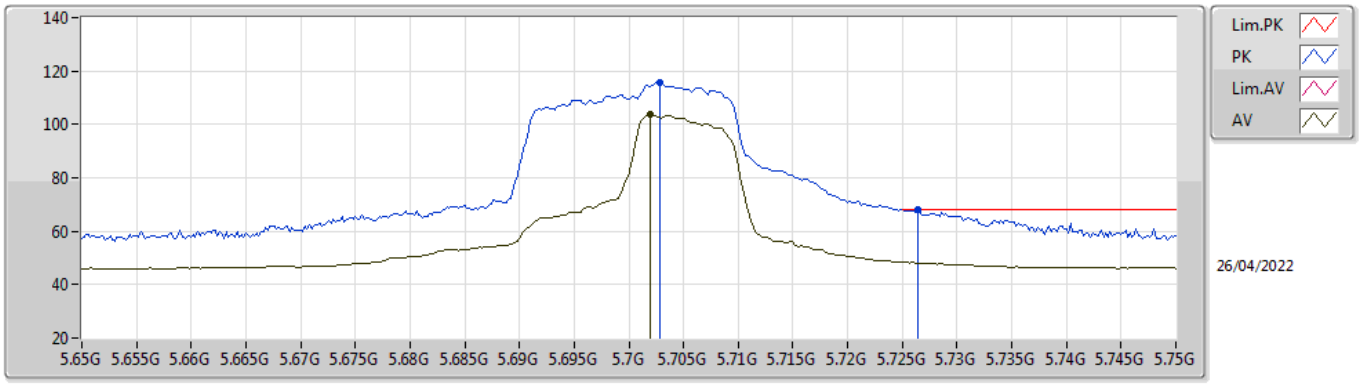


EUT X_1TX
Setting 16
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7028G	115.85	Inf	-Inf	109.61	3	Vertical	80	1.86	-	34.29	7.40	35.45
AV	5.702G	103.55	Inf	-Inf	97.30	3	Vertical	80	1.86	-	34.30	7.40	35.45
PK	5.7264G	67.99	68.20	-0.21	61.80	3	Vertical	80	1.86	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

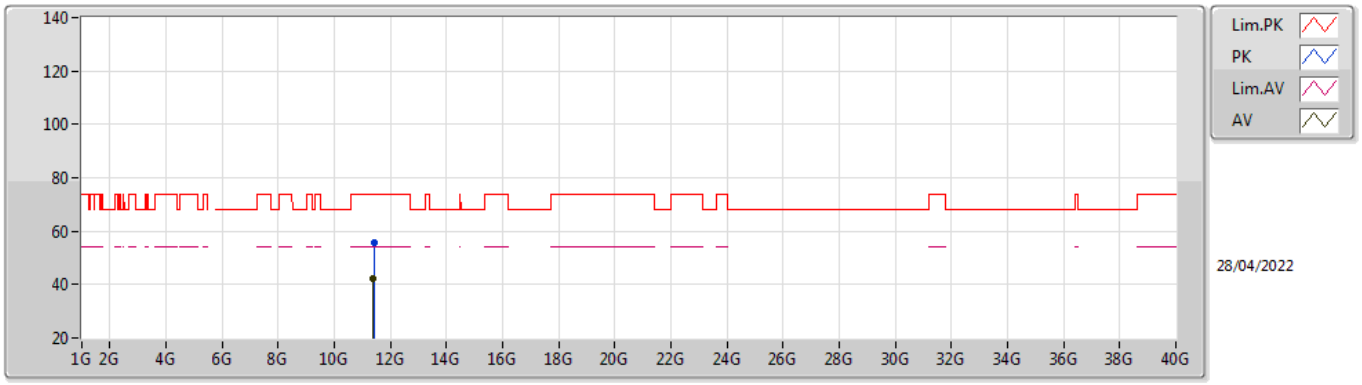


EUT X_1TX
Setting 16
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.41302G	55.87	74.00	-18.13	41.83	3	Vertical	135	2.86	-	38.83	10.71	35.50
AV	11.3997G	42.29	54.00	-11.71	28.27	3	Vertical	135	2.86	-	38.80	10.71	35.49

802.11ax HEW20_Nss1,(MCS0)_1TX

5700MHz_TnomVnom

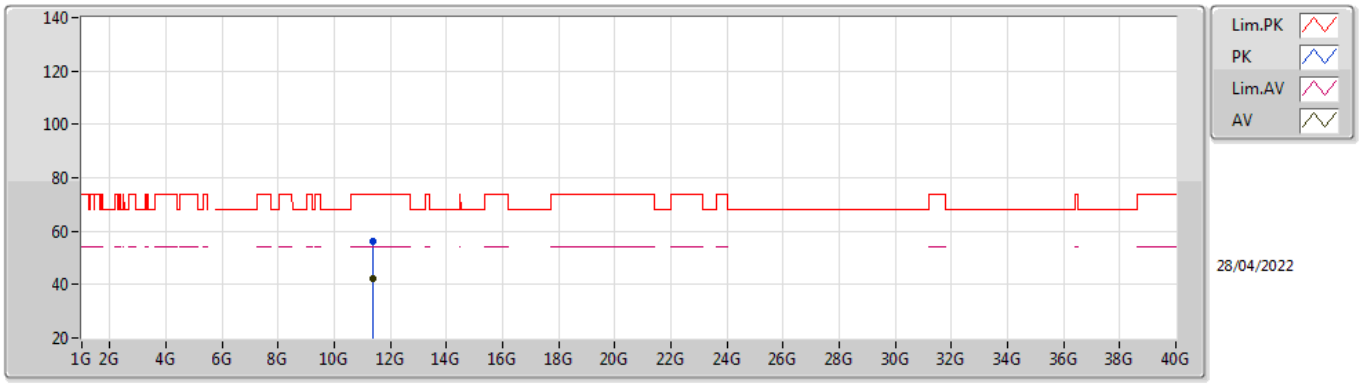


EUT X_1TX
Setting 16
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.3979G	55.98	74.00	-18.02	41.96	3	Horizontal	60	2.24	-	38.80	10.71	35.49
AV	11.39388G	42.30	54.00	-11.70	28.28	3	Horizontal	60	2.24	-	38.79	10.71	35.48

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

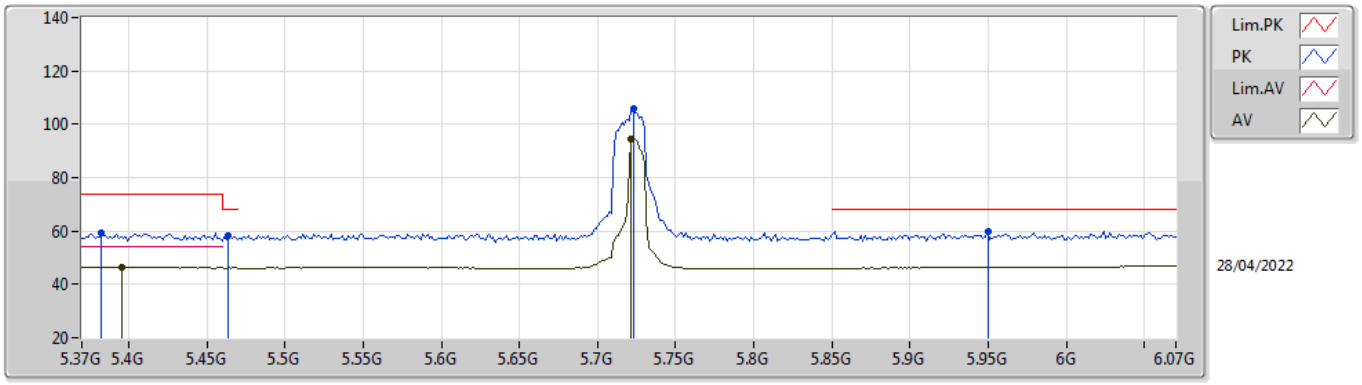


EUT X_1TX
Setting 21.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3826G	59.20	74.00	-14.80	52.78	3	Vertical	64	1.87	-	34.57	7.20	35.35
AV	5.3952G	46.39	54.00	-7.61	39.95	3	Vertical	64	1.87	-	34.59	7.20	35.35
PK	5.4638G	58.19	68.20	-10.01	51.75	3	Vertical	64	1.87	-	34.53	7.26	35.35
PK	5.7228G	105.77	Inf	-Inf	99.58	3	Vertical	64	1.87	-	34.25	7.40	35.46
AV	5.7214G	94.72	Inf	-Inf	88.52	3	Vertical	64	1.87	-	34.26	7.40	35.46
PK	5.9496G	59.72	68.20	-8.48	52.94	3	Vertical	64	1.87	-	34.80	7.55	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

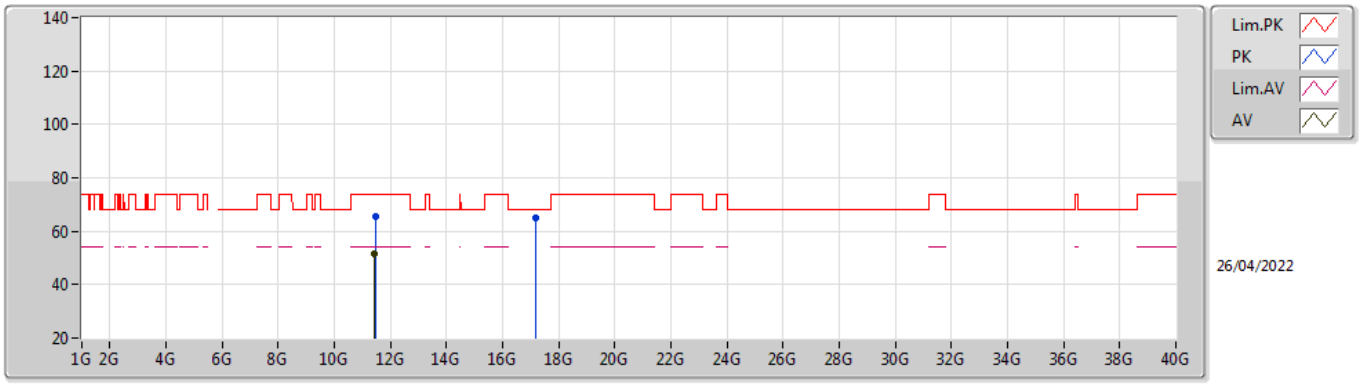


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.451G	65.41	74.00	-8.59	51.34	3	Vertical	173	2.79	-	38.90	10.72	35.55
AV	11.4484G	51.35	54.00	-2.65	37.27	3	Vertical	173	2.79	-	38.90	10.72	35.54
PK	17.16G	64.92	68.20	-3.28	45.15	3	Vertical	116	1.80	-	40.44	14.21	34.88

802.11ax HEW20_Nss1,(MCS0)_1TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

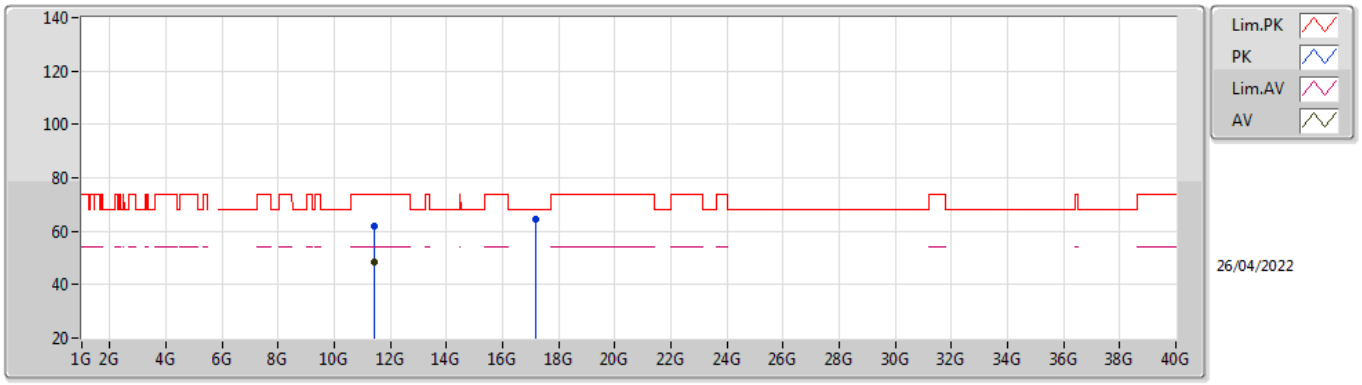


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4444G	61.66	74.00	-12.34	47.59	3	Horizontal	228	2.11	-	38.89	10.72	35.54
AV	11.4484G	48.51	54.00	-5.49	34.43	3	Horizontal	228	2.11	-	38.90	10.72	35.54
PK	17.1848G	64.32	68.20	-3.88	44.43	3	Horizontal	360	1.80	-	40.54	14.23	34.88

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

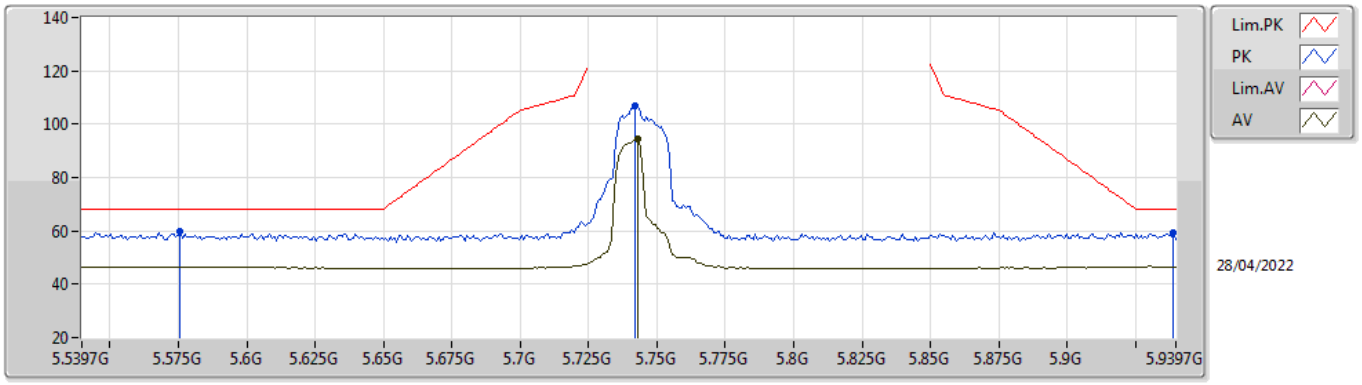


EUT X_1TX
Setting 21.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.5757G	60.08	68.20	-8.12	53.49	3	Vertical	63	1.86	-	34.60	7.38	35.39
PK	5.7421G	106.66	Inf	-Inf	100.51	3	Vertical	63	1.86	-	34.22	7.40	35.47
AV	5.7429G	94.73	Inf	-Inf	88.59	3	Vertical	63	1.86	-	34.21	7.40	35.47
PK	5.9389G	59.35	68.20	-8.85	52.62	3	Vertical	63	1.86	-	34.76	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

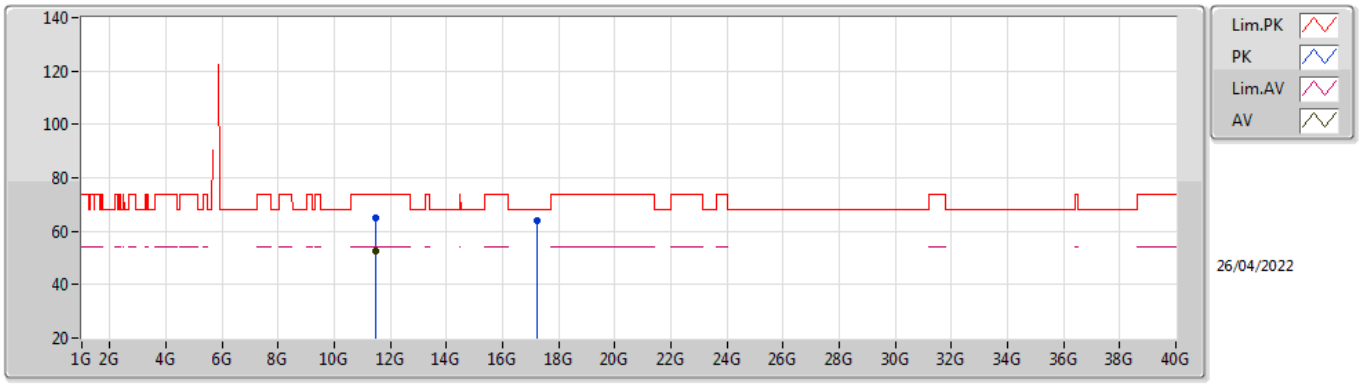


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4792G	64.86	74.00	-9.14	50.76	3	Vertical	178	2.76	-	38.96	10.72	35.58
AV	11.4812G	52.59	54.00	-1.41	38.49	3	Vertical	178	2.76	-	38.96	10.72	35.58
PK	17.2448G	63.82	68.20	-4.38	43.56	3	Vertical	146	1.35	-	40.87	14.27	34.88

802.11ax HEW20_Nss1,(MCS0)_1TX

5745MHz_TnomVnom

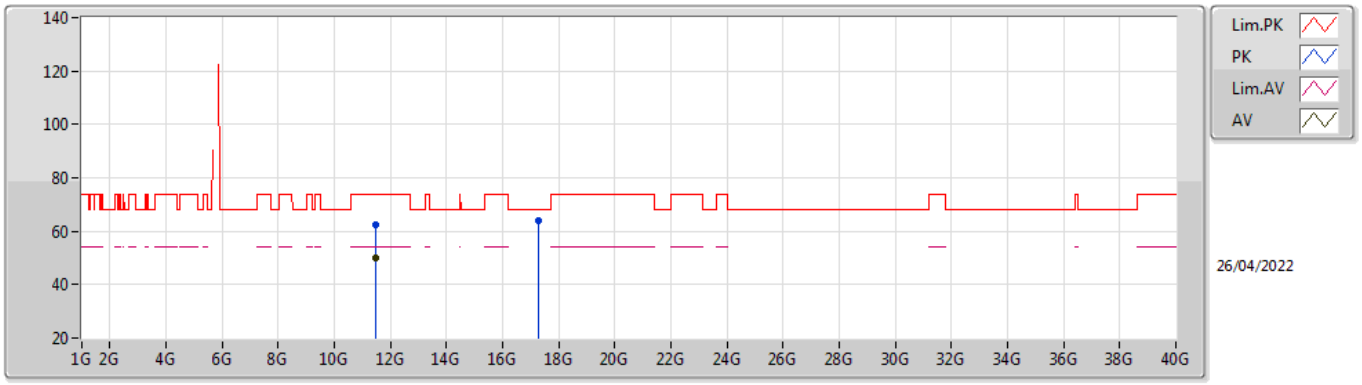


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.481G	62.48	74.00	-11.52	48.38	3	Horizontal	186	2.11	-	38.96	10.72	35.58
AV	11.4814G	49.90	54.00	-4.10	35.80	3	Horizontal	186	2.11	-	38.96	10.72	35.58
PK	17.2754G	63.91	68.20	-4.29	43.46	3	Horizontal	150	1.80	-	41.05	14.29	34.89

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

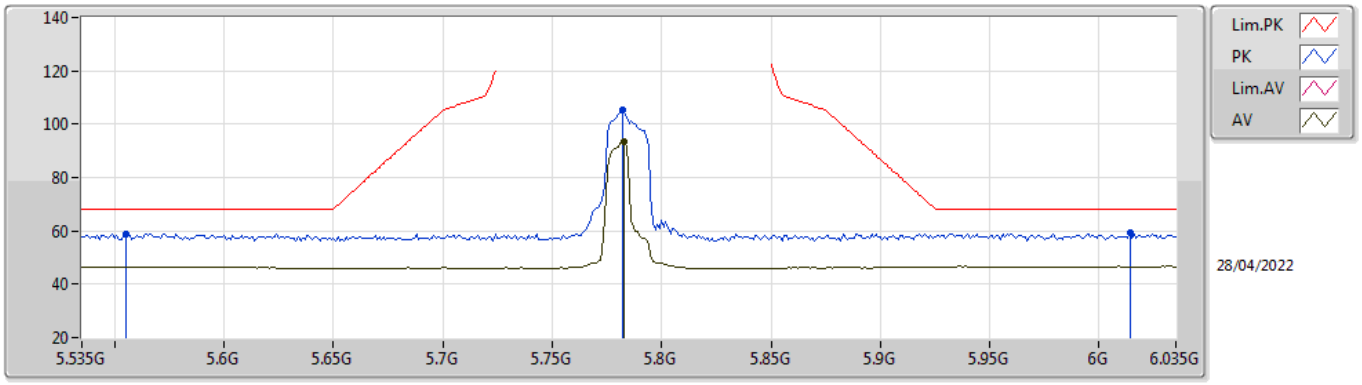


EUT X_1TX
Setting 19.75
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.555G	59.00	68.20	-9.20	52.42	3	Vertical	63	1.80	-	34.60	7.36	35.38
PK	5.782G	105.37	Inf	-Inf	99.26	3	Vertical	63	1.80	-	34.20	7.40	35.49
AV	5.783G	93.44	Inf	-Inf	87.33	3	Vertical	63	1.80	-	34.20	7.40	35.49
PK	6.014G	59.12	68.20	-9.08	52.27	3	Vertical	63	1.80	-	34.83	7.61	35.59

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

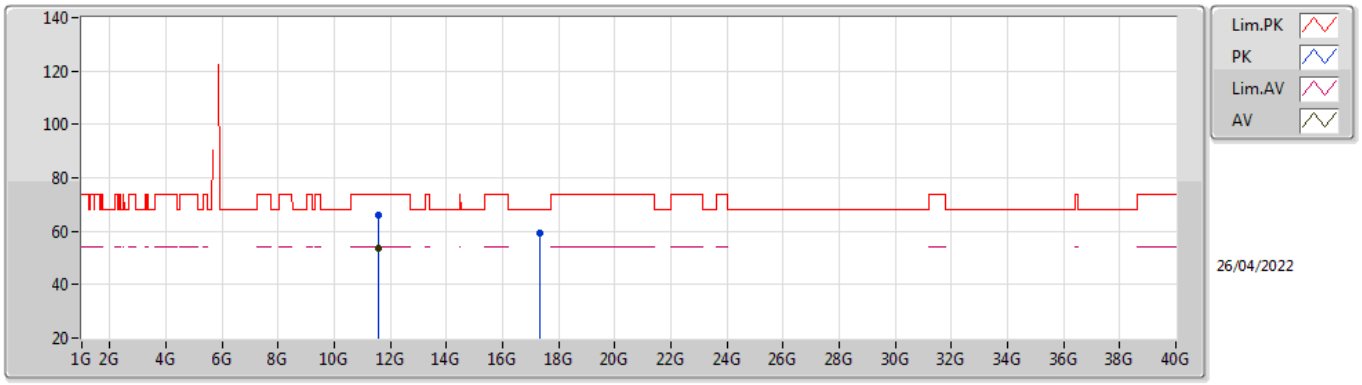


EUT X_1TX
Setting 19.75
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5612G	65.87	74.00	-8.13	51.49	3	Vertical	173	3.00	-	39.24	10.73	35.59
AV	11.5612G	53.84	54.00	-0.16	39.46	3	Vertical	173	3.00	-	39.24	10.73	35.59
PK	17.3378G	59.32	68.20	-8.88	38.52	3	Vertical	81	2.98	-	41.35	14.34	34.89

802.11ax HEW20_Nss1,(MCS0)_1TX

5785MHz_TnomVnom

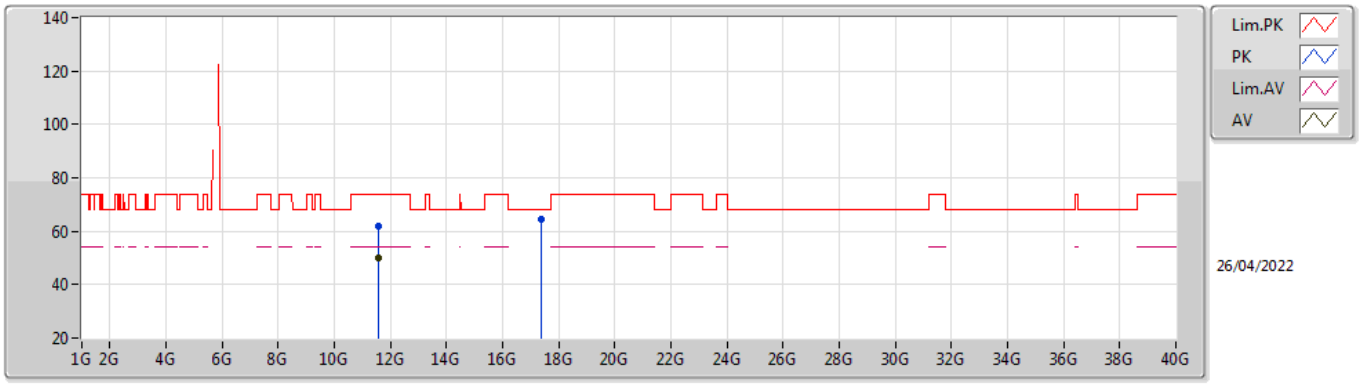


EUT X_1TX
Setting 19.75
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5622G	62.08	74.00	-11.92	47.69	3	Horizontal	186	2.16	-	39.25	10.73	35.59
AV	11.5612G	49.80	54.00	-4.20	35.42	3	Horizontal	186	2.16	-	39.24	10.73	35.59
PK	17.3824G	64.46	68.20	-3.74	43.46	3	Horizontal	360	1.69	-	41.53	14.37	34.90

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

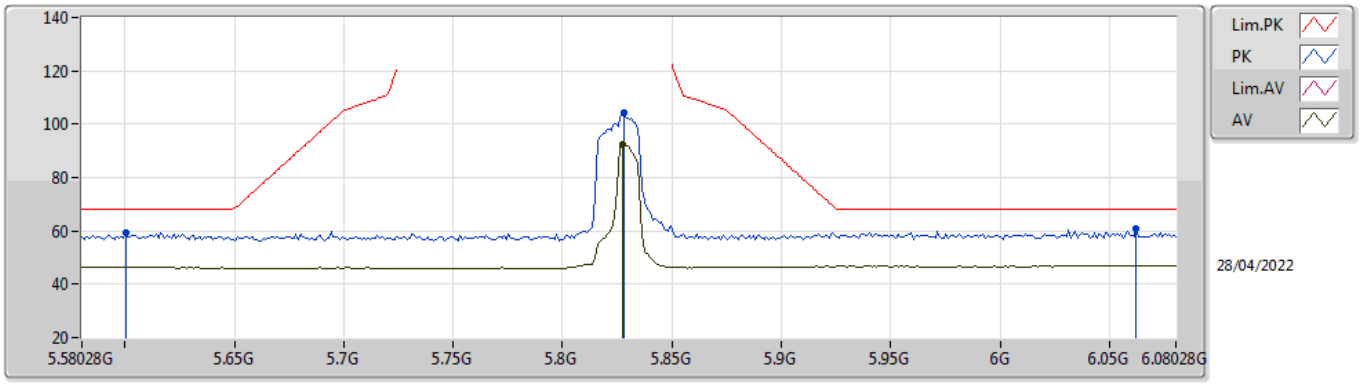


EUT X_1TX
Setting 21.5
03-C-C-6-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.60028G	59.52	68.20	-8.68	52.92	3	Vertical	64	1.80	-	34.60	7.40	35.40
PK	5.82828G	104.40	Inf	-Inf	98.22	3	Vertical	64	1.80	-	34.26	7.43	35.51
AV	5.82728G	92.55	Inf	-Inf	86.38	3	Vertical	64	1.80	-	34.25	7.43	35.51
PK	6.06228G	61.06	68.20	-7.14	54.09	3	Vertical	64	1.80	-	34.92	7.63	35.58

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

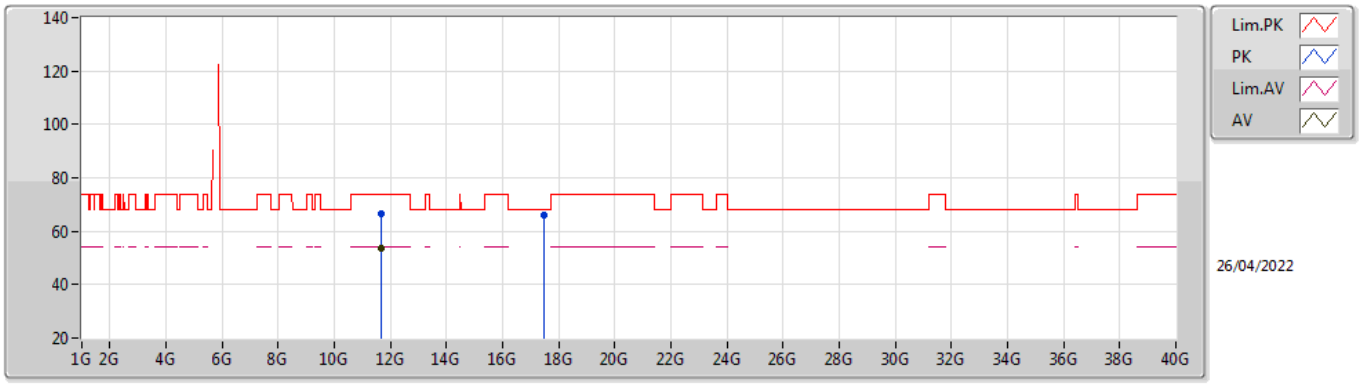


EUT X_1TX
Setting 21.5
03-C-C-6

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6562G	66.73	74.00	-7.27	52.15	3	Vertical	171	2.70	-	39.40	10.75	35.57
AV	11.6562G	53.77	54.00	-0.23	39.19	3	Vertical	171	2.70	-	39.40	10.75	35.57
PK	17.4818G	66.23	68.20	-1.97	44.36	3	Vertical	0	2.15	-	42.34	14.44	34.91

802.11ax HEW20_Nss1,(MCS0)_1TX

5825MHz_TnomVnom

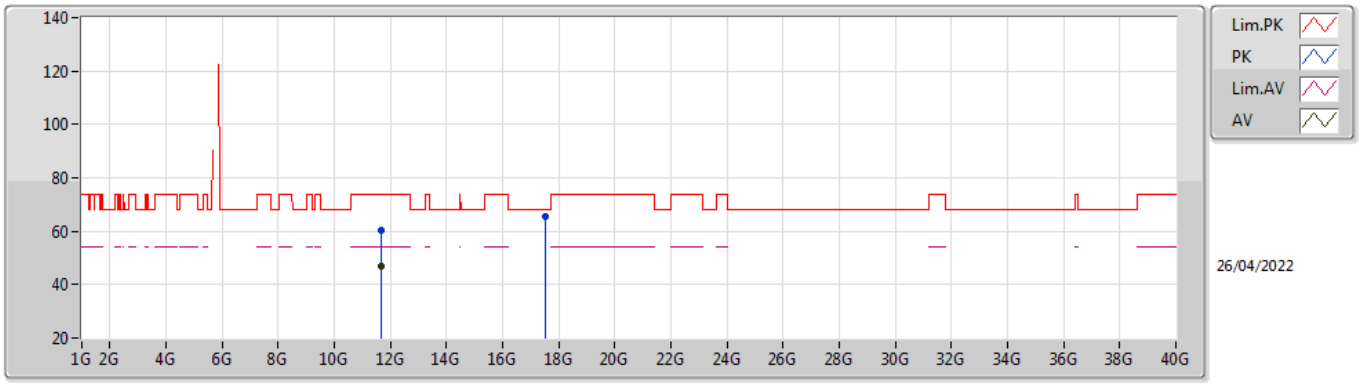

EUT X_1TX
Setting 21.5
03-C-C-6


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6564G	60.57	74.00	-13.43	45.99	3	Horizontal	155	2.06	-	39.40	10.75	35.57
AV	11.6562G	46.68	54.00	-7.32	32.10	3	Horizontal	155	2.06	-	39.40	10.75	35.57
PK	17.5062G	65.61	68.20	-2.59	43.51	3	Horizontal	64	1.80	-	42.56	14.45	34.91

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	AV	11.5528G	53.95	54.00	-0.05	3	Vertical	177	2.94	-

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

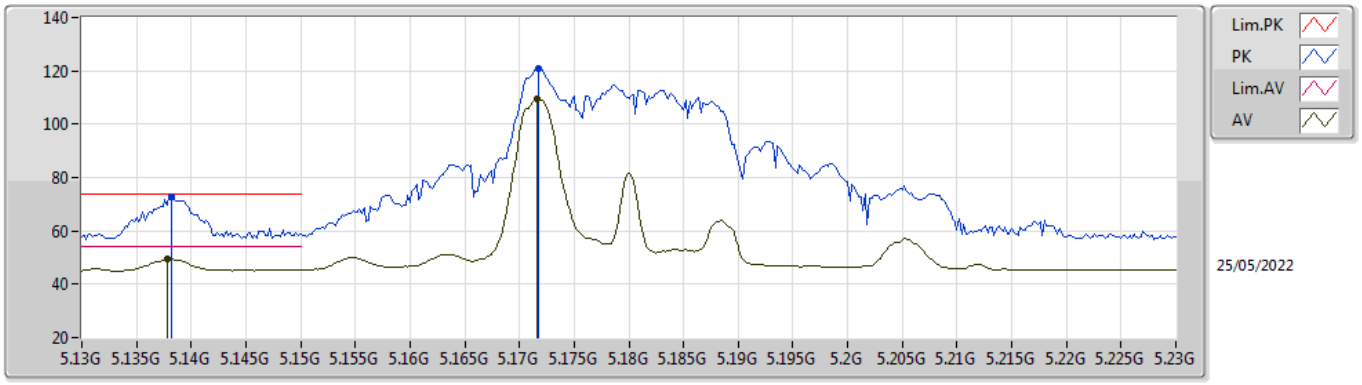


EUT X_2TX
Setting 19.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1382G	72.89	74.00	-1.11	67.08	3	Vertical	210	1.80	-	33.98	7.17	35.34
AV	5.1378G	49.44	54.00	-4.56	43.63	3	Vertical	210	1.80	-	33.98	7.17	35.34
PK	5.1718G	121.09	Inf	-Inf	115.15	3	Vertical	210	1.80	-	34.09	7.19	35.34
AV	5.1716G	109.23	Inf	-Inf	103.29	3	Vertical	210	1.80	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

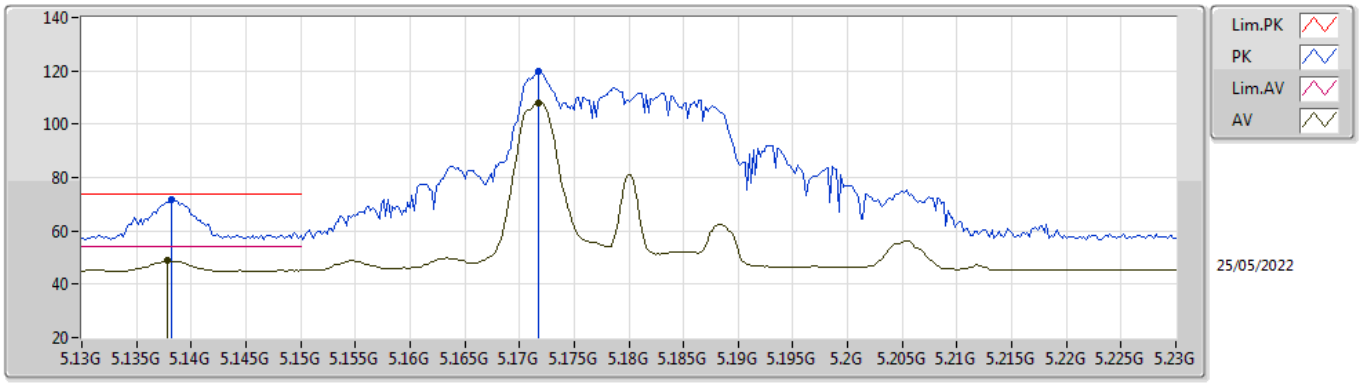


EUT X_2TX
Setting 19.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1382G	71.58	74.00	-2.42	65.77	3	Horizontal	207	1.81	-	33.98	7.17	35.34
AV	5.1378G	48.76	54.00	-5.24	42.95	3	Horizontal	207	1.81	-	33.98	7.17	35.34
PK	5.1718G	119.88	Inf	-Inf	113.94	3	Horizontal	207	1.81	-	34.09	7.19	35.34
AV	5.1718G	107.89	Inf	-Inf	101.95	3	Horizontal	207	1.81	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

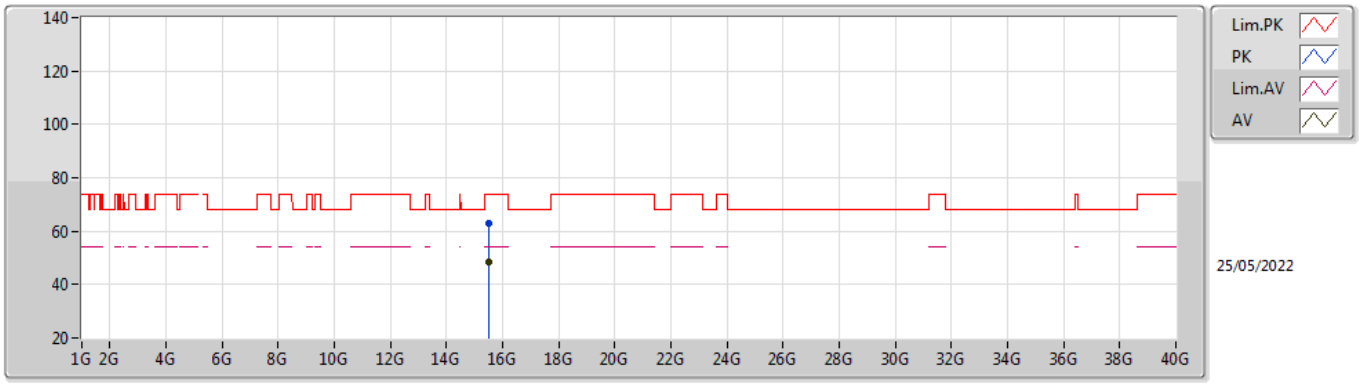


EUT X_2TX
Setting 19.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.516G	63.17	74.00	-10.83	46.80	3	Vertical	155	2.06	-	38.59	13.16	35.38
AV	15.5146G	48.31	54.00	-5.69	31.93	3	Vertical	155	2.06	-	38.60	13.16	35.38

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

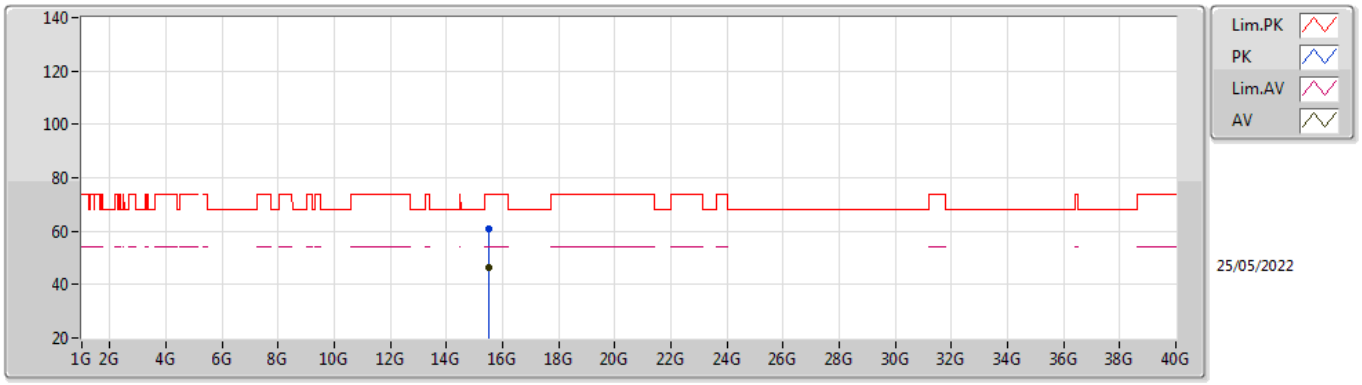


EUT X_2TX
Setting 19.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5142G	60.76	74.00	-13.24	44.38	3	Horizontal	71	2.88	-	38.60	13.16	35.38
AV	15.5142G	46.32	54.00	-7.68	29.94	3	Horizontal	71	2.88	-	38.60	13.16	35.38

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

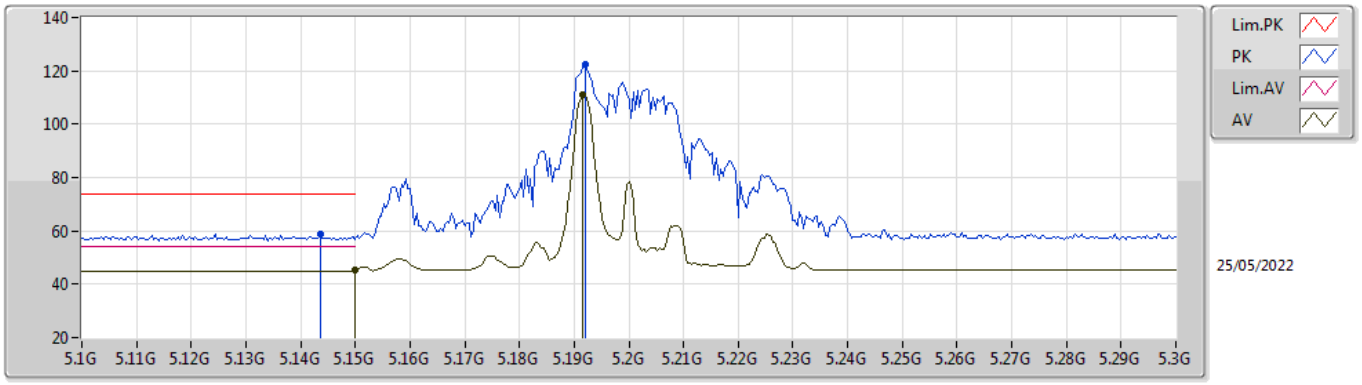


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1436G	58.83	74.00	-15.17	53.01	3	Vertical	208	1.69	-	33.99	7.17	35.34
AV	5.15G	45.16	54.00	-8.84	39.33	3	Vertical	208	1.69	-	34.00	7.17	35.34
PK	5.192G	122.31	Inf	-Inf	116.28	3	Vertical	208	1.69	-	34.17	7.20	35.34
AV	5.1916G	110.81	Inf	-Inf	104.78	3	Vertical	208	1.69	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

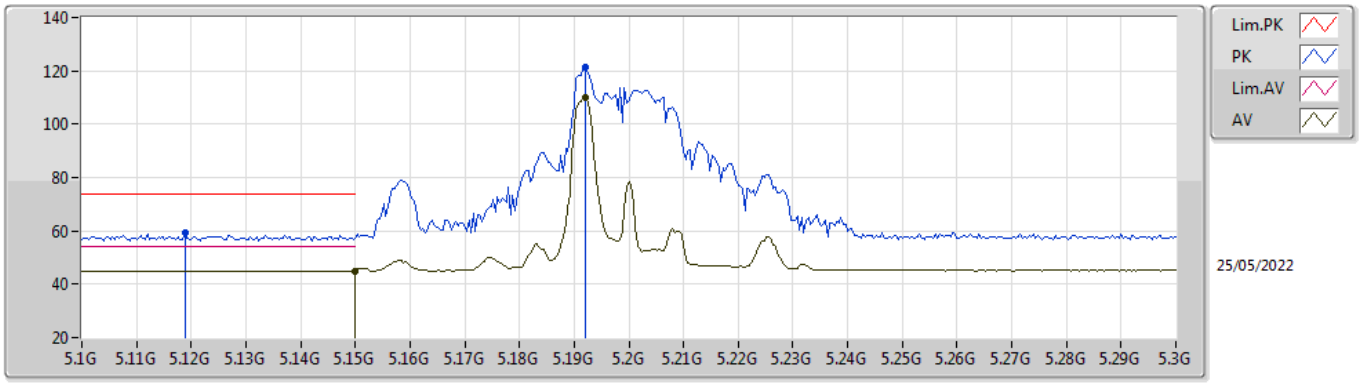


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1188G	59.26	74.00	-14.74	53.49	3	Horizontal	207	1.84	-	33.94	7.16	35.33
AV	5.15G	45.06	54.00	-8.94	39.23	3	Horizontal	207	1.84	-	34.00	7.17	35.34
PK	5.192G	121.58	Inf	-Inf	115.55	3	Horizontal	207	1.84	-	34.17	7.20	35.34
AV	5.192G	109.99	Inf	-Inf	103.96	3	Horizontal	207	1.84	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

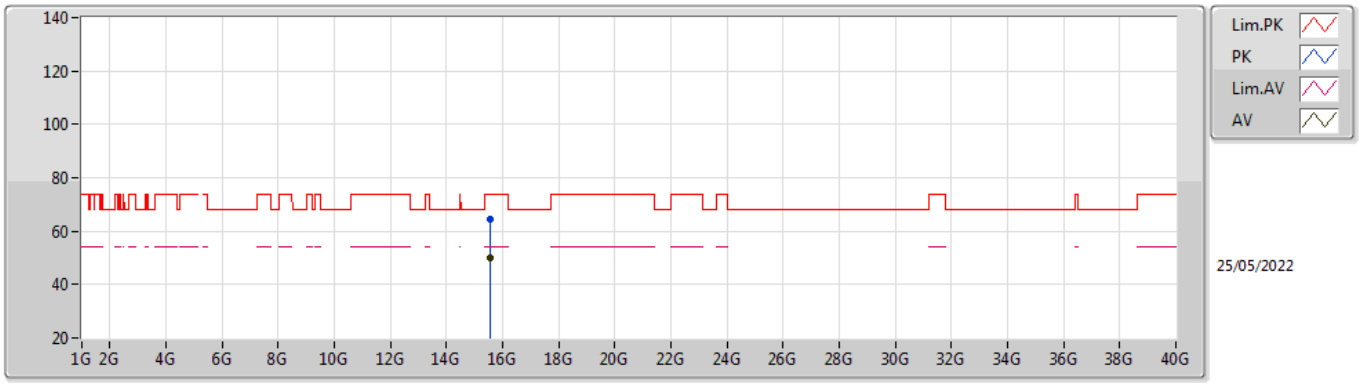


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.575G	64.25	74.00	-9.75	48.32	3	Vertical	170	2.76	-	38.17	13.19	35.43
AV	15.575G	49.87	54.00	-4.13	33.94	3	Vertical	170	2.76	-	38.17	13.19	35.43

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

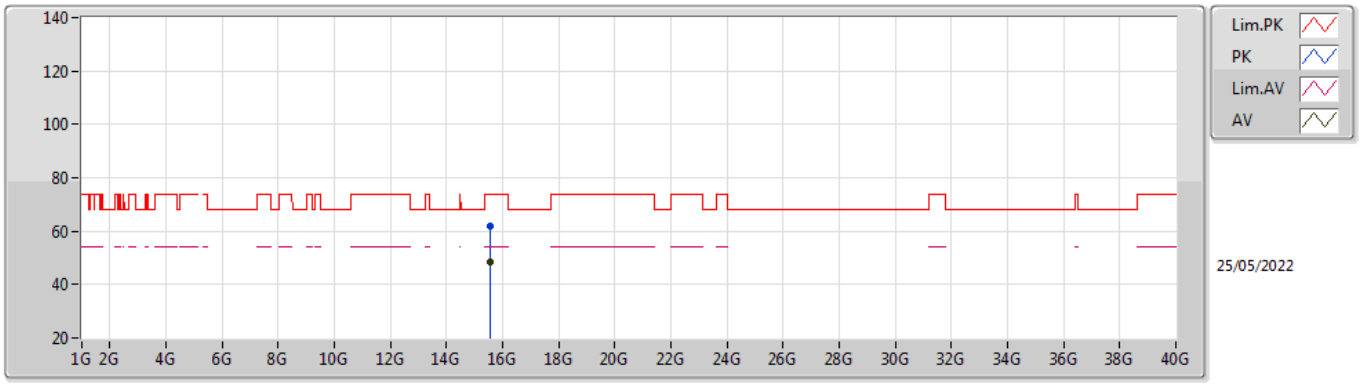


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5754G	61.78	74.00	-12.22	45.85	3	Horizontal	225	1.92	-	38.17	13.19	35.43
AV	15.5754G	48.27	54.00	-5.73	32.34	3	Horizontal	225	1.92	-	38.17	13.19	35.43

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

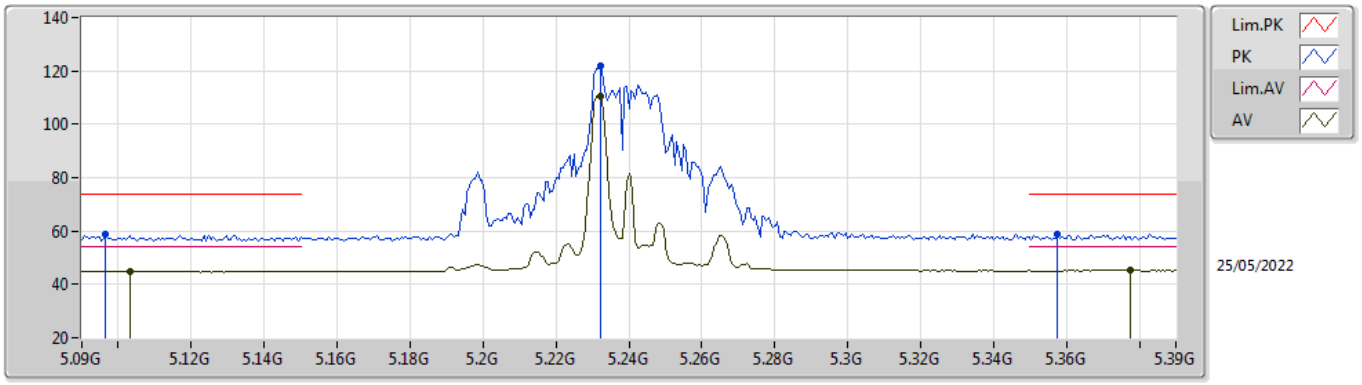


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.0966G	58.60	74.00	-15.40	52.89	3	Vertical	261	1.80	-	33.89	7.15	35.33
AV	5.1032G	44.80	54.00	-9.20	39.07	3	Vertical	261	1.80	-	33.91	7.15	35.33
PK	5.2322G	121.75	Inf	-Inf	115.56	3	Vertical	261	1.80	-	34.33	7.20	35.34
AV	5.2322G	110.70	Inf	-Inf	104.51	3	Vertical	261	1.80	-	34.33	7.20	35.34
PK	5.3576G	58.66	74.00	-15.34	52.28	3	Vertical	261	1.80	-	34.52	7.20	35.34
AV	5.3774G	45.27	54.00	-8.73	38.87	3	Vertical	261	1.80	-	34.55	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

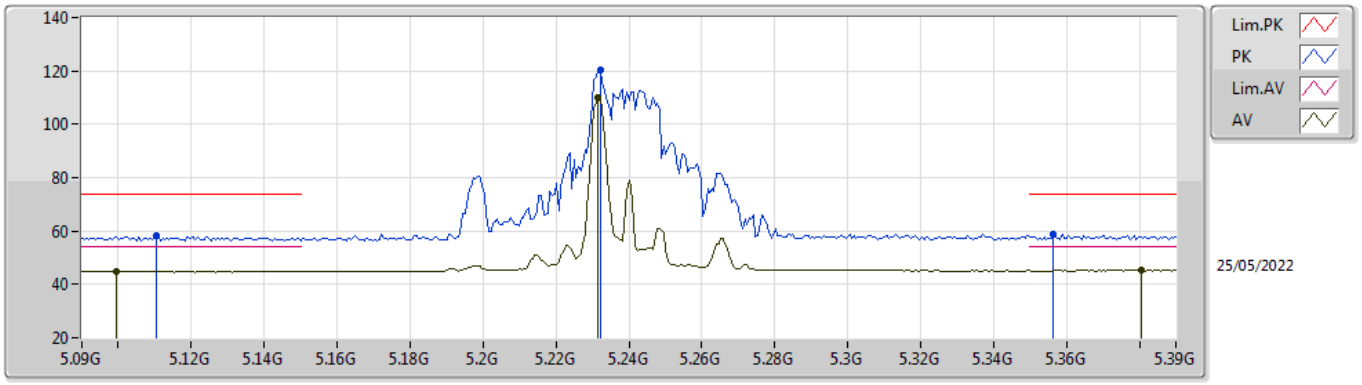


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1104G	58.30	74.00	-15.70	52.55	3	Horizontal	209	1.70	-	33.92	7.16	35.33
AV	5.0996G	44.80	54.00	-9.20	39.08	3	Horizontal	209	1.70	-	33.90	7.15	35.33
PK	5.2322G	120.57	Inf	-Inf	114.38	3	Horizontal	209	1.70	-	34.33	7.20	35.34
AV	5.2316G	109.86	Inf	-Inf	103.67	3	Horizontal	209	1.70	-	34.33	7.20	35.34
PK	5.3564G	58.79	74.00	-15.21	52.42	3	Horizontal	209	1.70	-	34.51	7.20	35.34
AV	5.3804G	45.21	54.00	-8.79	38.80	3	Horizontal	209	1.70	-	34.56	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

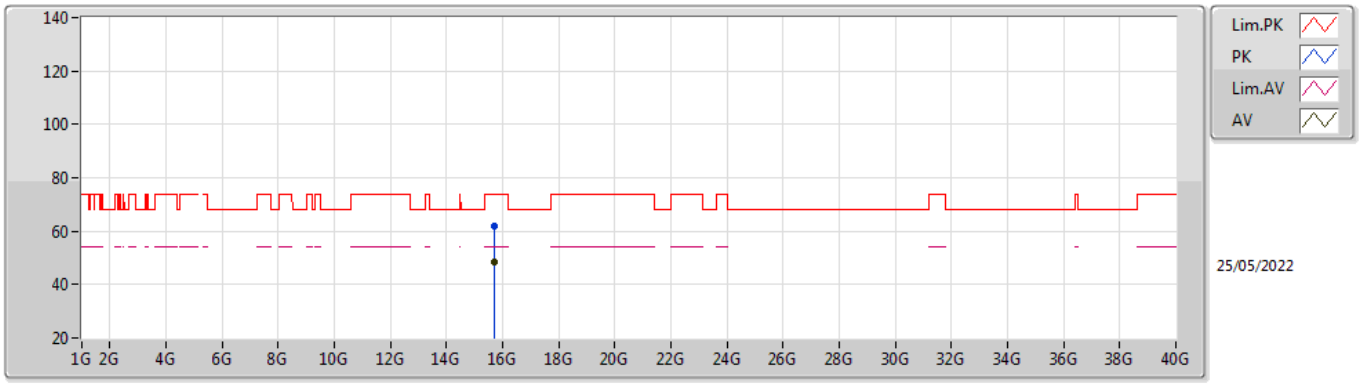


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6954G	61.99	74.00	-12.01	46.75	3	Vertical	152	2.09	-	37.52	13.25	35.53
AV	15.695G	48.19	54.00	-5.81	32.94	3	Vertical	152	2.09	-	37.53	13.25	35.53

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

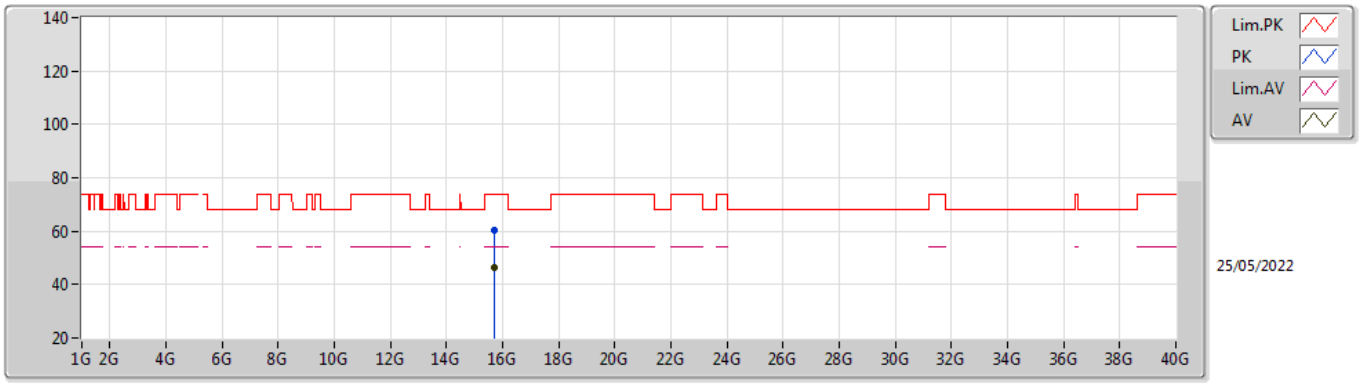


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6954G	60.32	74.00	-13.68	45.08	3	Horizontal	280	1.80	-	37.52	13.25	35.53
AV	15.6946G	46.55	54.00	-7.45	31.30	3	Horizontal	280	1.80	-	37.53	13.25	35.53

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

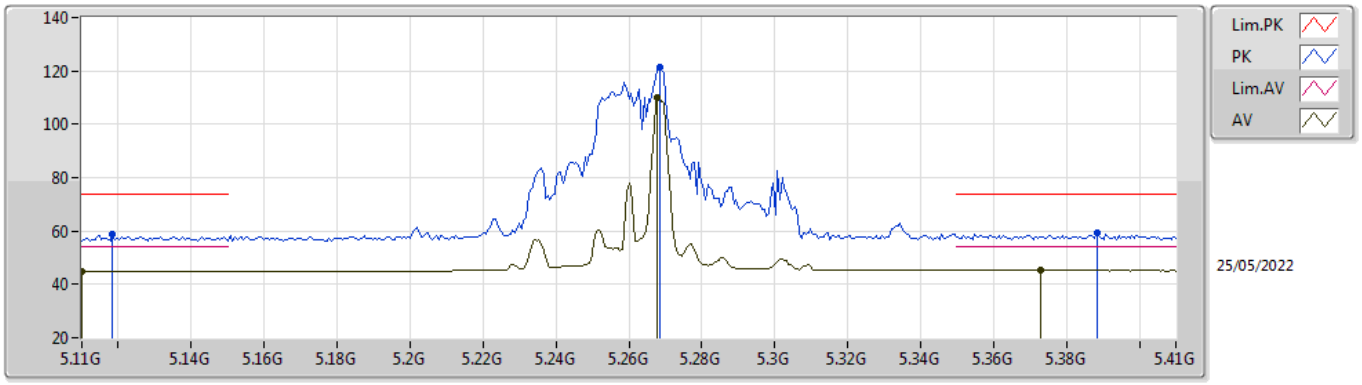


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1184G	58.62	74.00	-15.38	52.85	3	Vertical	315	1.92	-	33.94	7.16	35.33
AV	5.11G	44.87	54.00	-9.13	39.12	3	Vertical	315	1.92	-	33.92	7.16	35.33
PK	5.2684G	121.17	Inf	-Inf	114.87	3	Vertical	315	1.92	-	34.44	7.20	35.34
AV	5.2678G	110.24	Inf	-Inf	103.94	3	Vertical	315	1.92	-	34.44	7.20	35.34
PK	5.3884G	59.39	74.00	-14.61	52.96	3	Vertical	315	1.92	-	34.58	7.20	35.35
AV	5.3728G	45.35	54.00	-8.65	38.94	3	Vertical	315	1.92	-	34.55	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

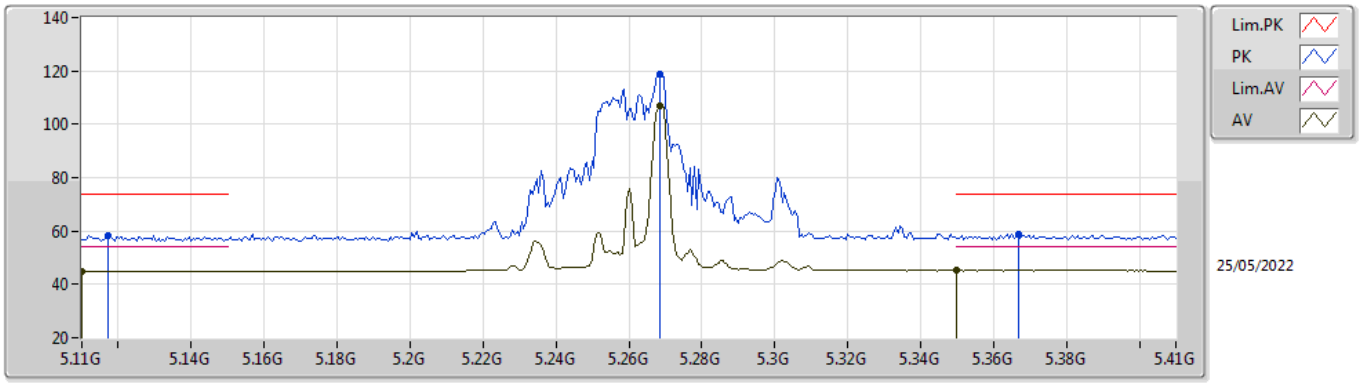


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1172G	58.15	74.00	-15.85	52.39	3	Horizontal	206	1.77	-	33.93	7.16	35.33
AV	5.11G	44.92	54.00	-9.08	39.17	3	Horizontal	206	1.77	-	33.92	7.16	35.33
PK	5.2684G	118.73	Inf	-Inf	112.43	3	Horizontal	206	1.77	-	34.44	7.20	35.34
AV	5.2684G	107.01	Inf	-Inf	100.71	3	Horizontal	206	1.77	-	34.44	7.20	35.34
PK	5.3668G	58.86	74.00	-15.14	52.47	3	Horizontal	206	1.77	-	34.53	7.20	35.34
AV	5.35G	45.37	54.00	-8.63	39.01	3	Horizontal	206	1.77	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

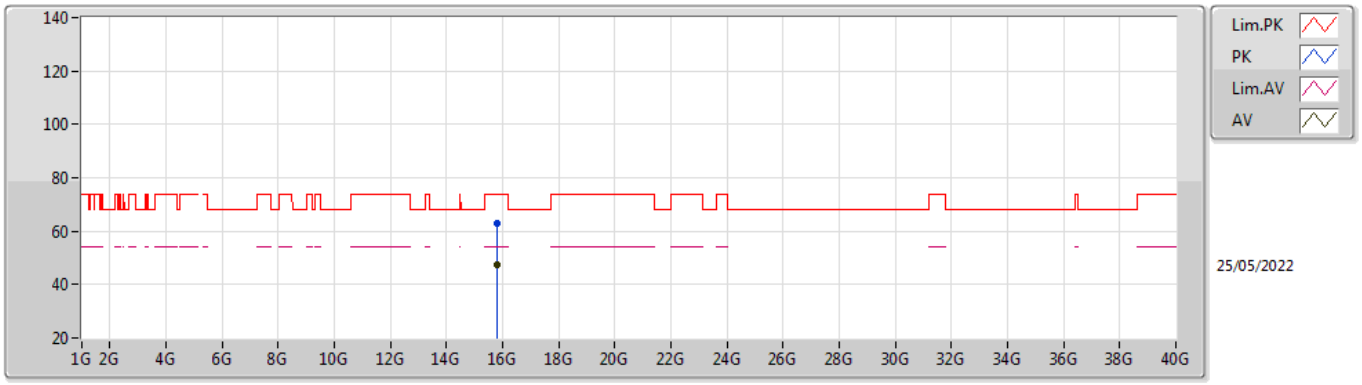


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.8052G	62.71	74.00	-11.29	47.16	3	Vertical	188	2.02	-	37.88	13.30	35.63
AV	15.8052G	47.34	54.00	-6.66	31.79	3	Vertical	188	2.02	-	37.88	13.30	35.63

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

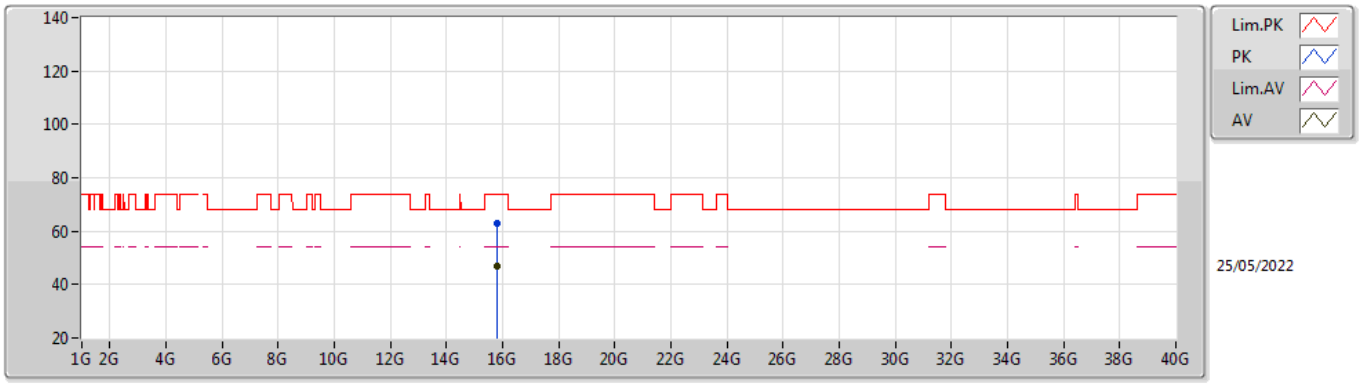


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.807G	62.98	74.00	-11.02	47.43	3	Horizontal	250	1.86	-	37.88	13.30	35.63
AV	15.8056G	46.69	54.00	-7.31	31.14	3	Horizontal	250	1.86	-	37.88	13.30	35.63

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

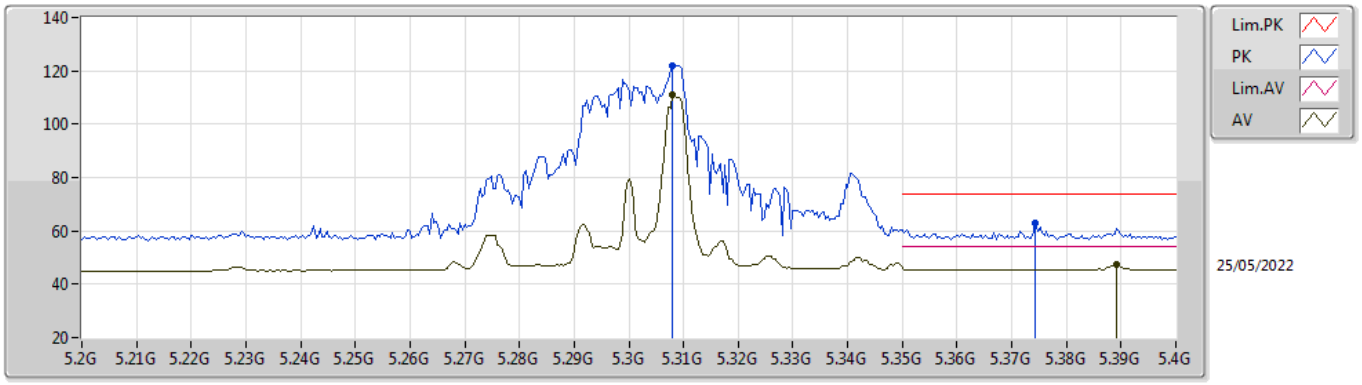


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.308G	122.03	Inf	-Inf	115.67	3	Vertical	312	2.01	-	34.50	7.20	35.34
AV	5.308G	111.17	Inf	-Inf	104.81	3	Vertical	312	2.01	-	34.50	7.20	35.34
PK	5.3744G	62.81	74.00	-11.19	56.40	3	Vertical	312	2.01	-	34.55	7.20	35.34
AV	5.3892G	47.62	54.00	-6.38	41.19	3	Vertical	312	2.01	-	34.58	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

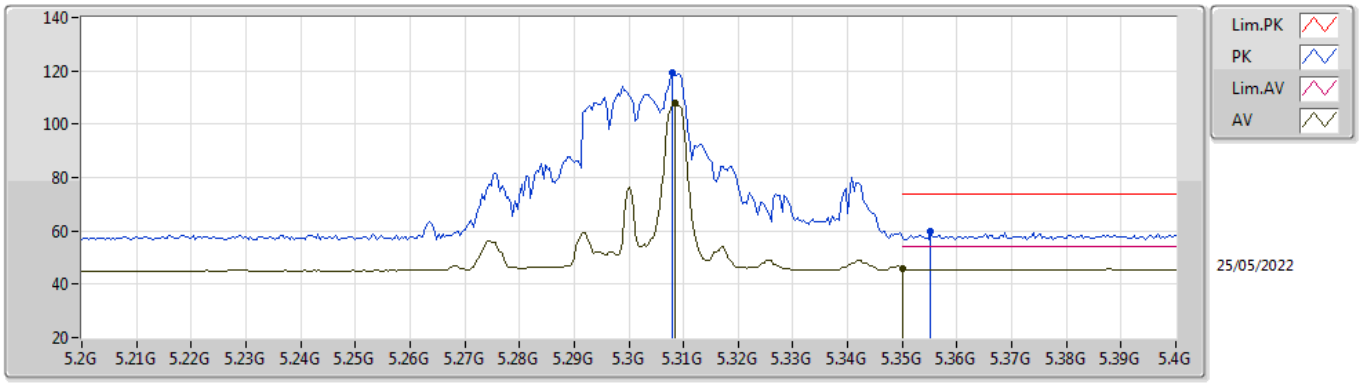


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.308G	119.49	Inf	-Inf	113.13	3	Horizontal	176	1.78	-	34.50	7.20	35.34
AV	5.3084G	108.18	Inf	-Inf	101.82	3	Horizontal	176	1.78	-	34.50	7.20	35.34
PK	5.3552G	59.98	74.00	-14.02	53.61	3	Horizontal	176	1.78	-	34.51	7.20	35.34
AV	5.35G	45.75	54.00	-8.25	39.39	3	Horizontal	176	1.78	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

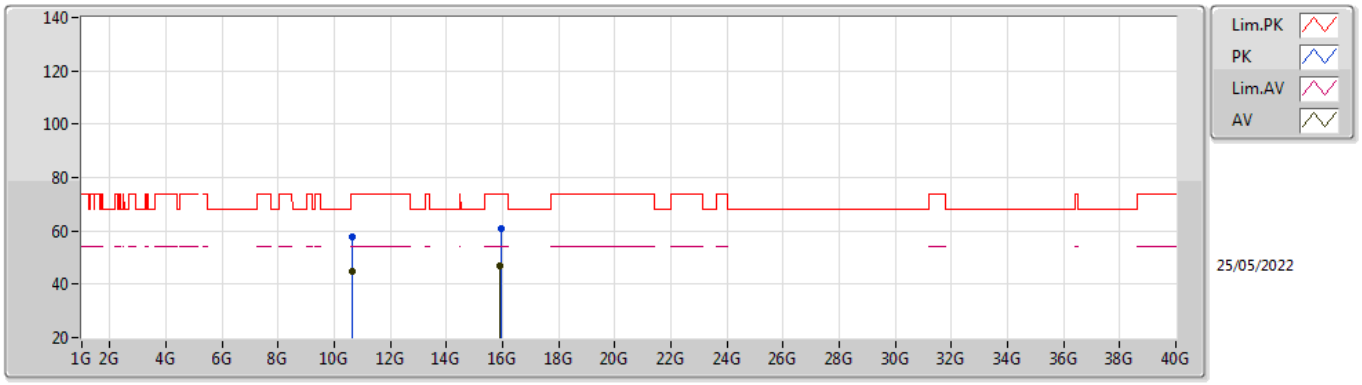


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6166G	57.84	74.00	-16.16	44.39	3	Vertical	223	1.64	-	38.23	10.59	35.37
AV	10.6168G	44.76	54.00	-9.24	31.31	3	Vertical	223	1.64	-	38.23	10.59	35.37
PK	15.9268G	60.76	74.00	-13.24	45.58	3	Vertical	208	2.96	-	37.55	13.36	35.73
AV	15.9248G	46.89	54.00	-7.11	31.71	3	Vertical	208	2.96	-	37.55	13.36	35.73

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

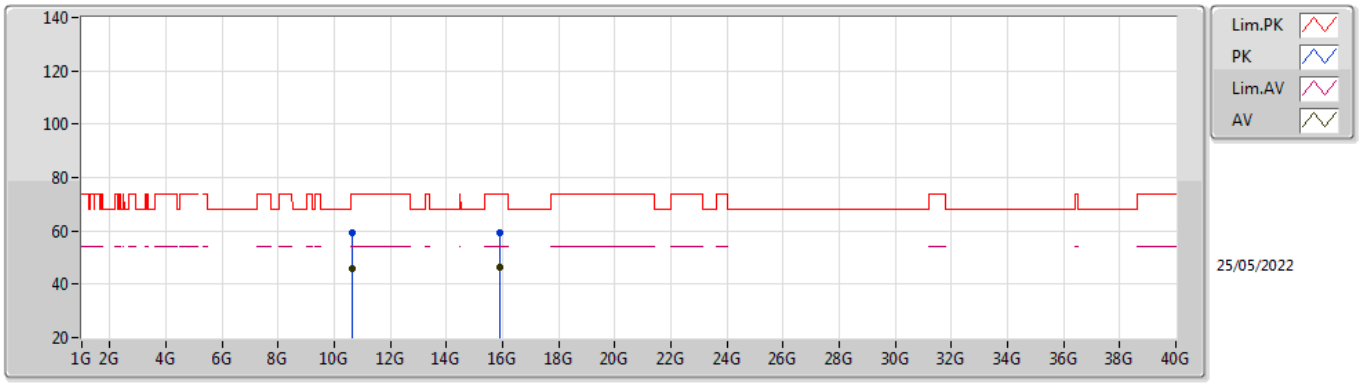


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.617G	59.34	74.00	-14.66	45.89	3	Horizontal	204	1.80	-	38.23	10.59	35.37
AV	10.6168G	45.75	54.00	-8.25	32.30	3	Horizontal	204	1.80	-	38.23	10.59	35.37
PK	15.9252G	59.54	74.00	-14.46	44.36	3	Horizontal	151	1.80	-	37.55	13.36	35.73
AV	15.925G	46.29	54.00	-7.71	31.11	3	Horizontal	151	1.80	-	37.55	13.36	35.73

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

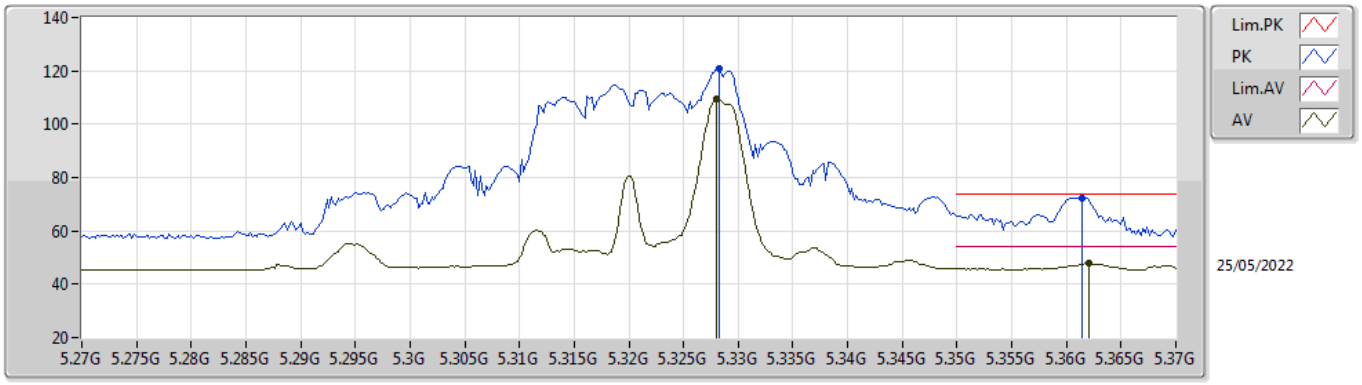


EUT X_2TX
Setting 18.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3282G	120.72	Inf	-Inf	114.36	3	Vertical	313	2.43	-	34.50	7.20	35.34
AV	5.328G	109.46	Inf	-Inf	103.10	3	Vertical	313	2.43	-	34.50	7.20	35.34
PK	5.3614G	72.49	74.00	-1.51	66.11	3	Vertical	313	2.43	-	34.52	7.20	35.34
AV	5.362G	47.83	54.00	-6.17	41.45	3	Vertical	313	2.43	-	34.52	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

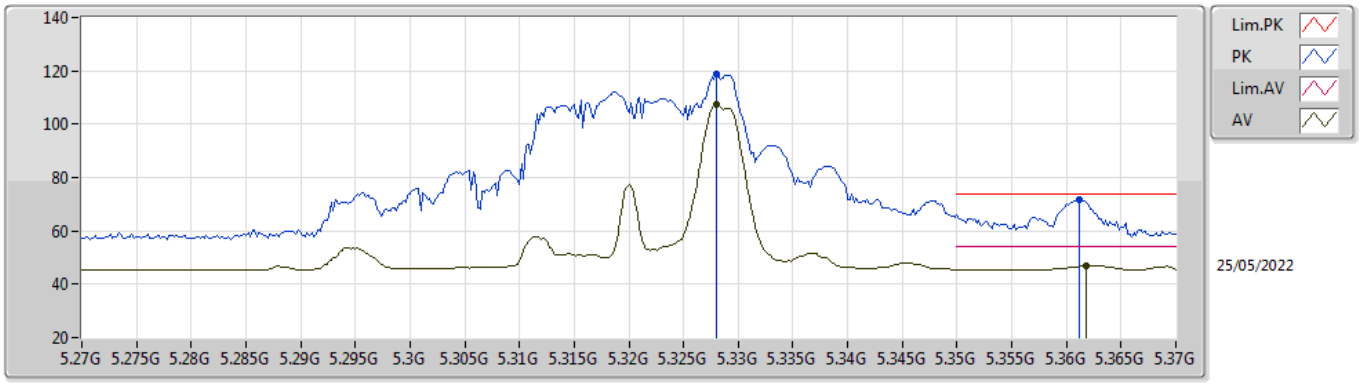


EUT X_2TX
Setting 18.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.328G	118.54	Inf	-Inf	112.18	3	Horizontal	209	1.80	-	34.50	7.20	35.34
AV	5.328G	107.39	Inf	-Inf	101.03	3	Horizontal	209	1.80	-	34.50	7.20	35.34
PK	5.3612G	71.73	74.00	-2.27	65.35	3	Horizontal	209	1.80	-	34.52	7.20	35.34
AV	5.3618G	47.13	54.00	-6.87	40.75	3	Horizontal	209	1.80	-	34.52	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

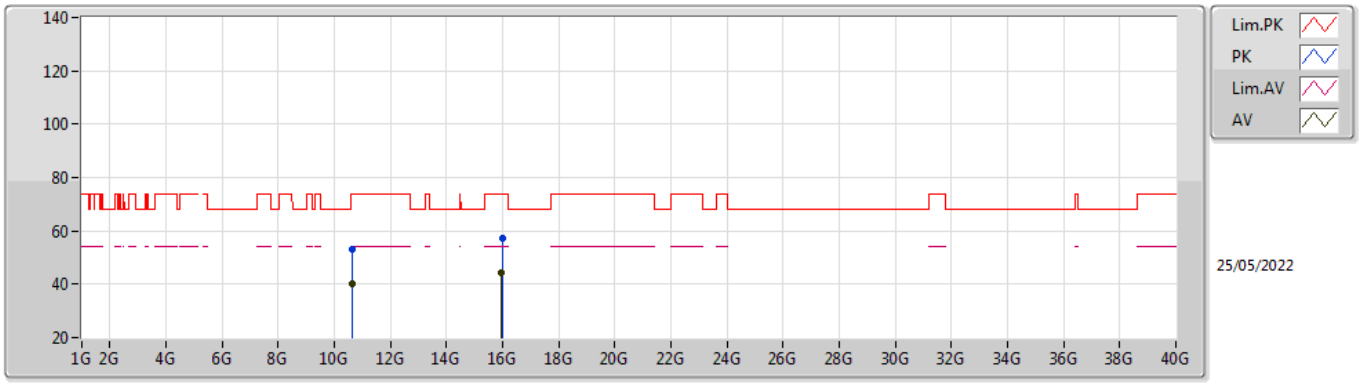


EUT X_2TX
Setting 18.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6562G	53.33	74.00	-20.67	39.76	3	Vertical	261	2.91	-	38.31	10.60	35.34
AV	10.6566G	40.05	54.00	-13.95	26.48	3	Vertical	261	2.91	-	38.31	10.60	35.34
PK	15.9908G	57.15	74.00	-16.85	42.11	3	Vertical	163	2.12	-	37.42	13.40	35.78
AV	15.9504G	44.28	54.00	-9.72	29.15	3	Vertical	163	2.12	-	37.50	13.38	35.75

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

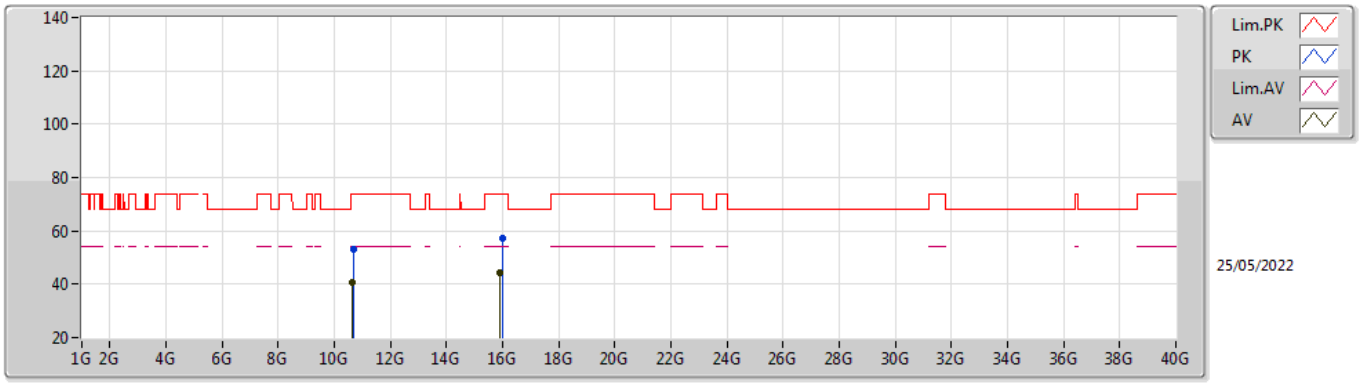


EUT X_2TX
Setting 18.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6718G	53.13	74.00	-20.87	39.51	3	Horizontal	198	1.76	-	38.34	10.60	35.32
AV	10.6572G	40.48	54.00	-13.52	26.90	3	Horizontal	198	1.76	-	38.31	10.60	35.33
PK	15.9814G	56.99	74.00	-17.01	41.93	3	Horizontal	349	1.77	-	37.44	13.39	35.77
AV	15.9122G	44.33	54.00	-9.67	29.11	3	Horizontal	349	1.77	-	37.58	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

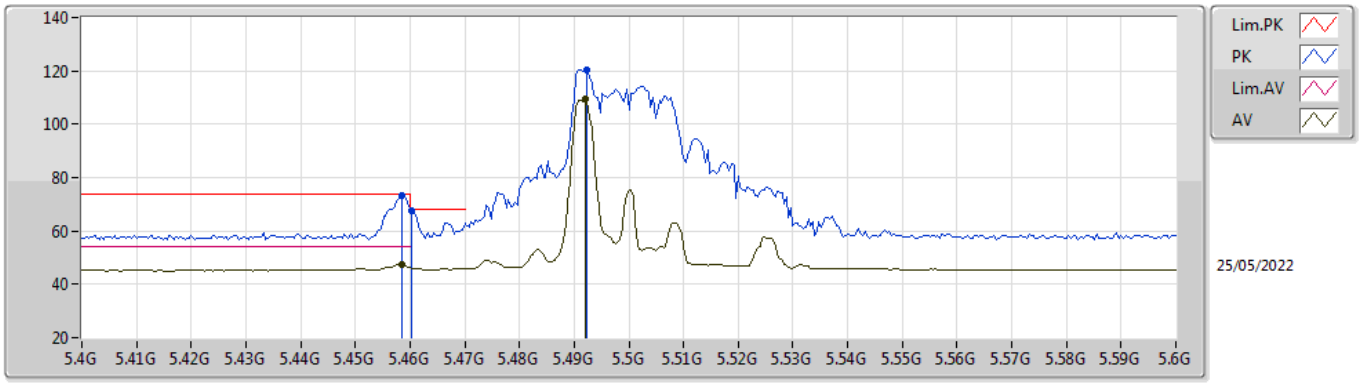


EUT X_2TX
Setting 19.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4584G	73.45	74.00	-0.55	67.02	3	Vertical	227	1.80	-	34.52	7.26	35.35
AV	5.4584G	47.59	54.00	-6.41	41.16	3	Vertical	227	1.80	-	34.52	7.26	35.35
PK	5.4604G	67.78	68.20	-0.42	61.35	3	Vertical	227	1.80	-	34.52	7.26	35.35
PK	5.4924G	120.53	Inf	-Inf	114.01	3	Vertical	227	1.80	-	34.58	7.29	35.35
AV	5.492G	109.34	Inf	-Inf	102.82	3	Vertical	227	1.80	-	34.58	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

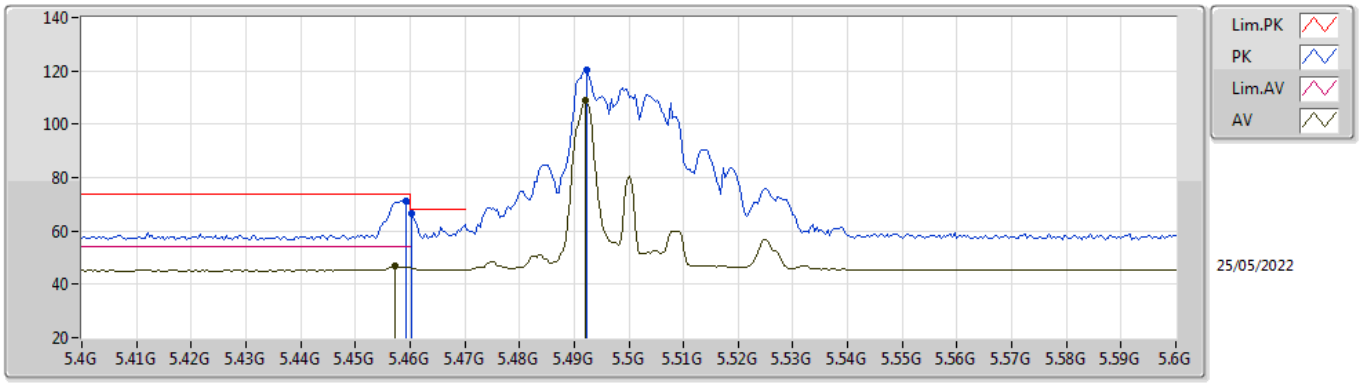


EUT X_2TX
Setting 19.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4592G	71.20	74.00	-2.80	64.77	3	Horizontal	202	1.80	-	34.52	7.26	35.35
AV	5.4572G	46.79	54.00	-7.21	40.37	3	Horizontal	202	1.80	-	34.51	7.26	35.35
PK	5.4604G	66.74	68.20	-1.46	60.31	3	Horizontal	202	1.80	-	34.52	7.26	35.35
PK	5.4924G	120.30	Inf	-Inf	113.78	3	Horizontal	202	1.80	-	34.58	7.29	35.35
AV	5.492G	108.71	Inf	-Inf	102.19	3	Horizontal	202	1.80	-	34.58	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

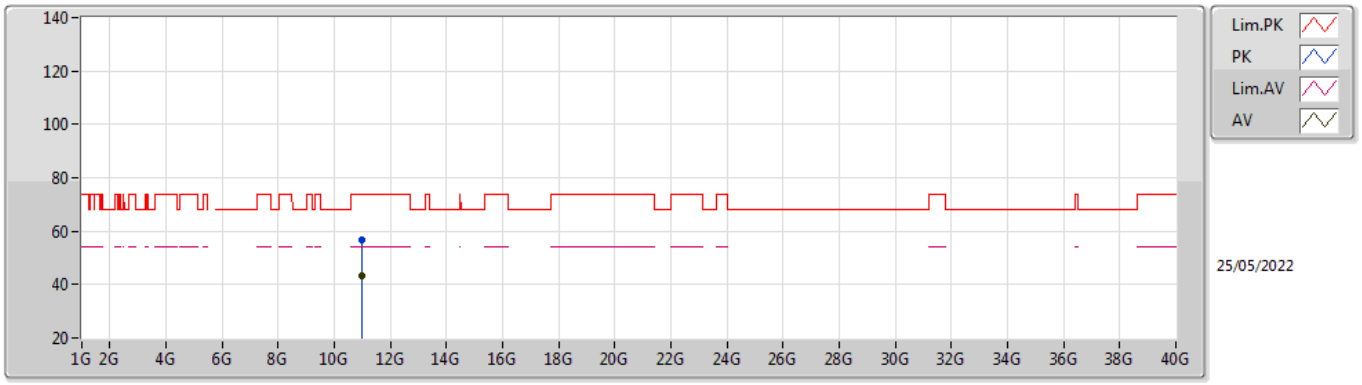


EUT X_2TX
Setting 19.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9828G	56.88	74.00	-17.12	42.90	3	Vertical	146	1.38	-	38.38	10.65	35.05
AV	10.983G	43.14	54.00	-10.86	29.16	3	Vertical	146	1.38	-	38.38	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

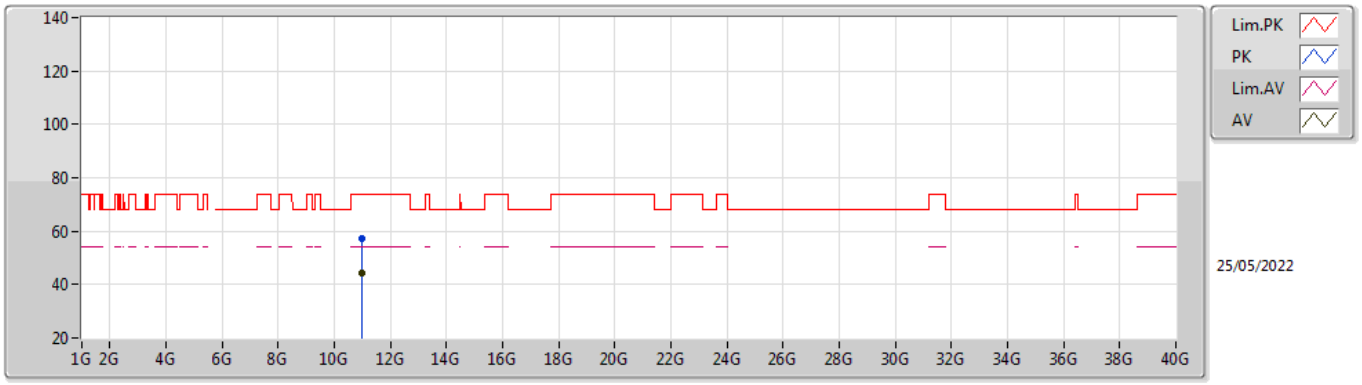


EUT X_2TX
Setting 19.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9824G	57.02	74.00	-16.98	43.05	3	Horizontal	264	2.93	-	38.38	10.65	35.06
AV	10.9826G	44.50	54.00	-9.50	30.52	3	Horizontal	264	2.93	-	38.38	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

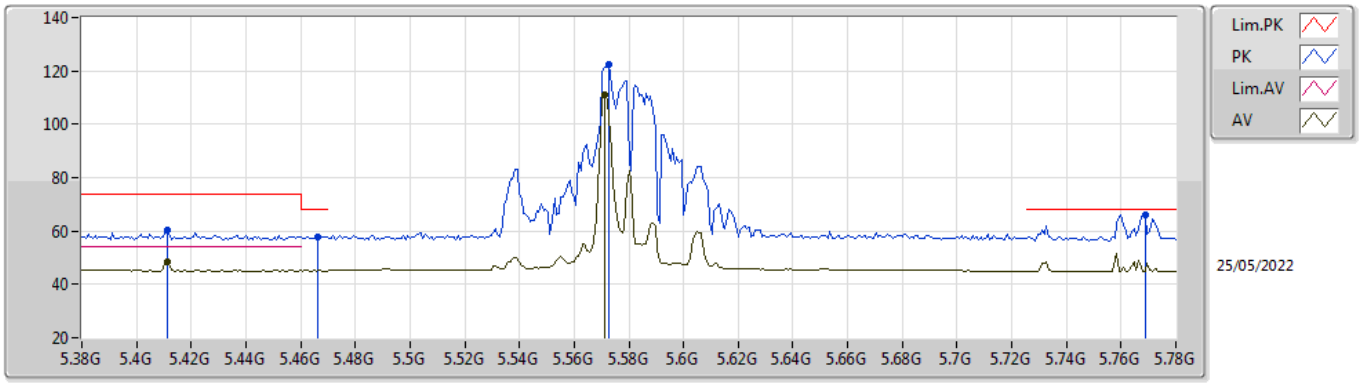


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4112G	60.38	74.00	-13.62	53.94	3	Vertical	228	1.80	-	34.58	7.21	35.35
AV	5.4112G	48.19	54.00	-5.81	41.75	3	Vertical	228	1.80	-	34.58	7.21	35.35
PK	5.4664G	57.96	68.20	-10.24	51.51	3	Vertical	228	1.80	-	34.53	7.27	35.35
PK	5.5728G	122.60	Inf	-Inf	116.02	3	Vertical	228	1.80	-	34.60	7.37	35.39
AV	5.5712G	111.02	Inf	-Inf	104.44	3	Vertical	228	1.80	-	34.60	7.37	35.39
PK	5.7688G	65.90	68.20	-2.30	59.78	3	Vertical	228	1.80	-	34.20	7.40	35.48

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

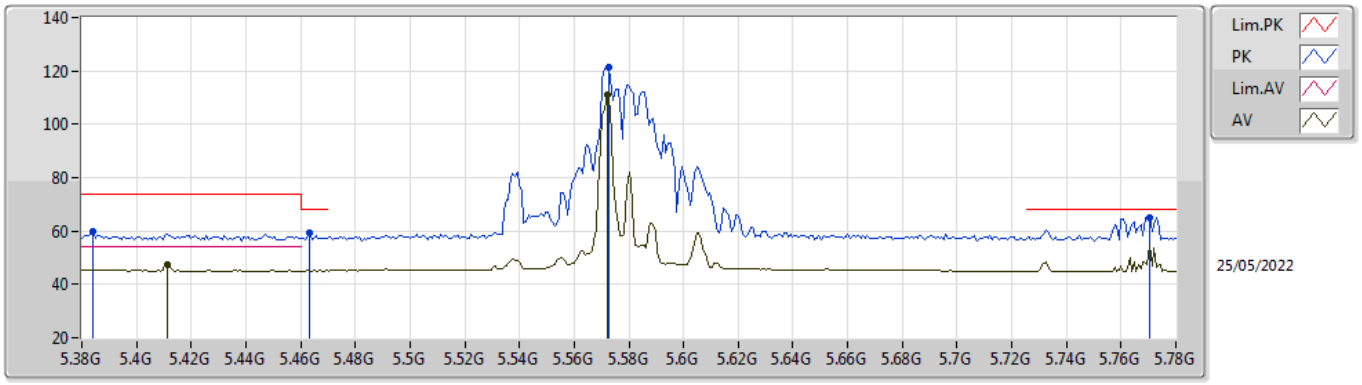


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.384G	59.71	74.00	-14.29	53.29	3	Horizontal	199	1.80	-	34.57	7.20	35.35
AV	5.4112G	47.35	54.00	-6.65	40.91	3	Horizontal	199	1.80	-	34.58	7.21	35.35
PK	5.4632G	59.26	68.20	-8.94	52.82	3	Horizontal	199	1.80	-	34.53	7.26	35.35
PK	5.5728G	121.54	Inf	-Inf	114.96	3	Horizontal	199	1.80	-	34.60	7.37	35.39
AV	5.572G	110.87	Inf	-Inf	104.29	3	Horizontal	199	1.80	-	34.60	7.37	35.39
PK	5.7704G	65.25	68.20	-2.95	59.14	3	Horizontal	199	1.80	-	34.20	7.40	35.49

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

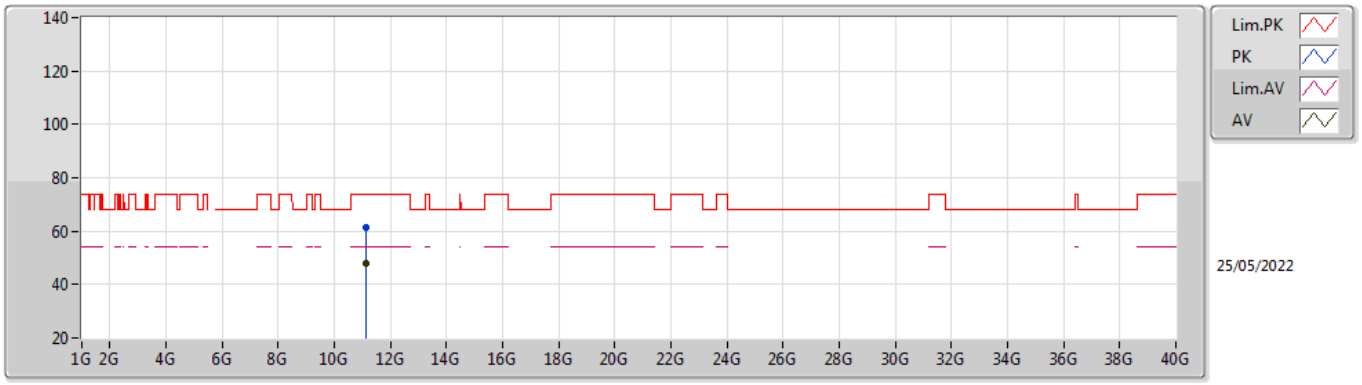


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1438G	61.16	74.00	-12.84	47.15	3	Vertical	138	1.75	-	38.54	10.67	35.20
AV	11.1434G	48.14	54.00	-5.86	34.13	3	Vertical	138	1.75	-	38.54	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

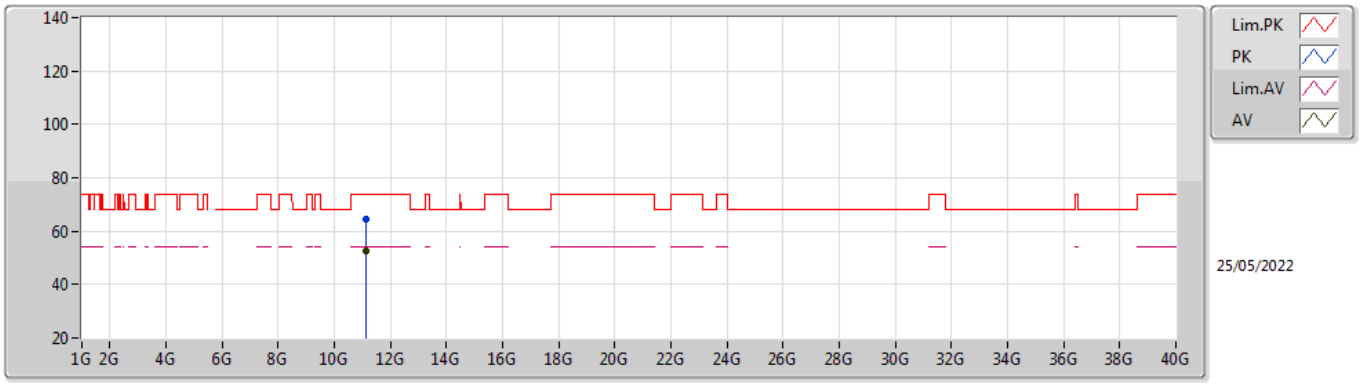


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1428G	64.24	74.00	-9.76	50.23	3	Horizontal	195	1.80	-	38.54	10.67	35.20
AV	11.1432G	52.69	54.00	-1.31	38.68	3	Horizontal	195	1.80	-	38.54	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

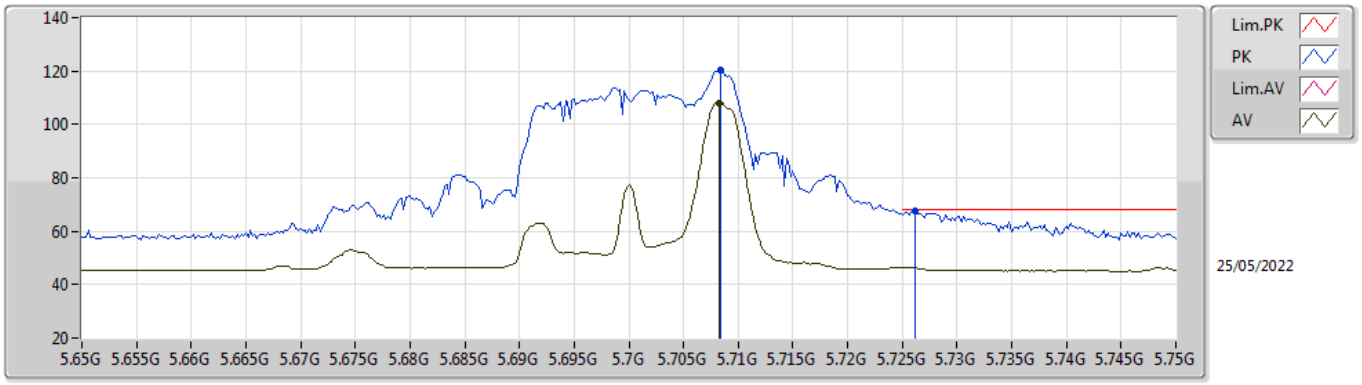


EUT X_2TX
Setting 17
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7084G	120.25	Inf	-Inf	114.02	3	Vertical	230	1.79	-	34.28	7.40	35.45
AV	5.7082G	108.17	Inf	-Inf	101.94	3	Vertical	230	1.79	-	34.28	7.40	35.45
PK	5.7262G	67.56	68.20	-0.64	61.37	3	Vertical	230	1.79	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

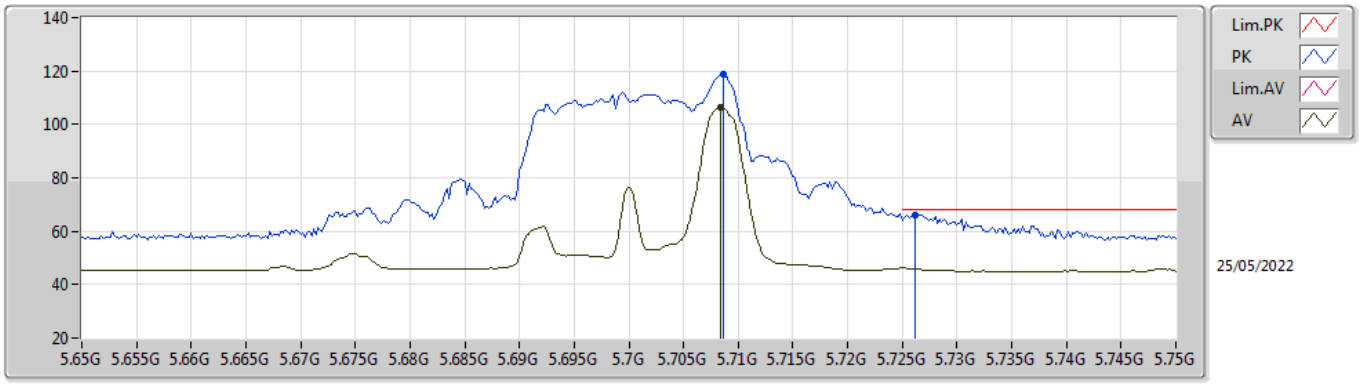


EUT X_2TX
Setting 17
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7086G	118.89	Inf	-Inf	112.66	3	Horizontal	187	1.80	-	34.28	7.40	35.45
AV	5.7084G	106.56	Inf	-Inf	100.33	3	Horizontal	187	1.80	-	34.28	7.40	35.45
PK	5.7262G	66.26	68.20	-1.94	60.07	3	Horizontal	187	1.80	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

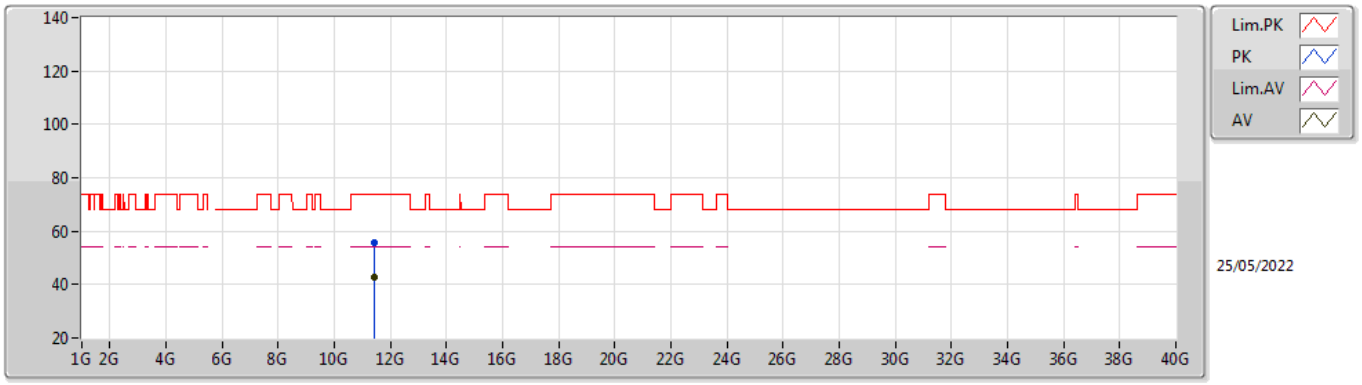


EUT X_2TX
Setting 17
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4172G	55.72	74.00	-18.28	41.69	3	Vertical	4	2.70	-	38.83	10.71	35.51
AV	11.4172G	42.60	54.00	-11.40	28.57	3	Vertical	4	2.70	-	38.83	10.71	35.51

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

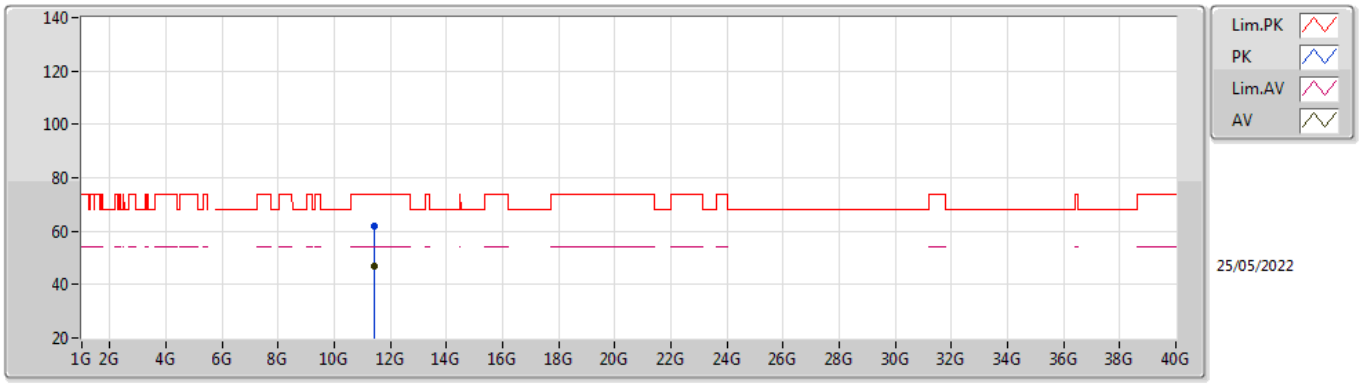


EUT X_2TX
Setting 17
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4174G	62.07	74.00	-11.93	48.04	3	Horizontal	140	2.03	-	38.83	10.71	35.51
AV	11.4174G	46.65	54.00	-7.35	32.62	3	Horizontal	140	2.03	-	38.83	10.71	35.51

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

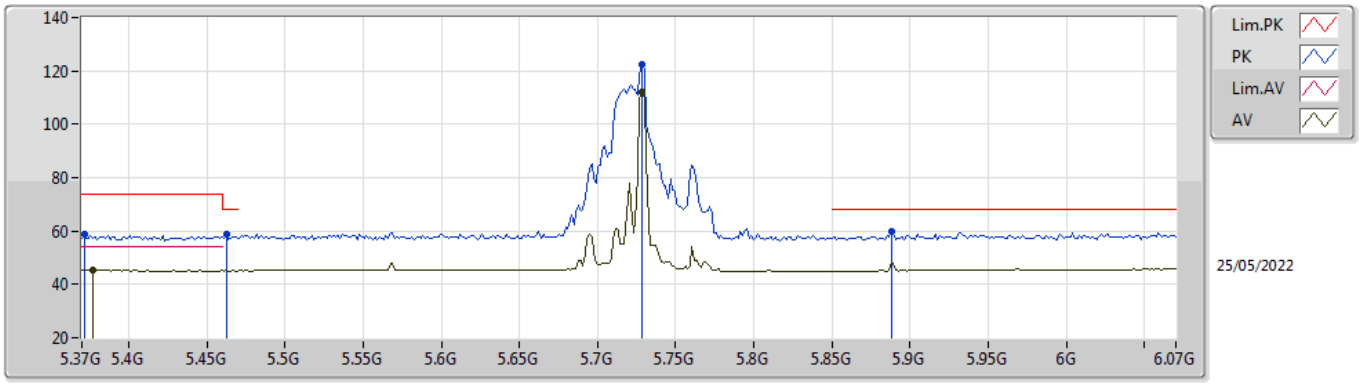


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3714G	58.82	74.00	-15.18	52.42	3	Vertical	230	1.77	-	34.54	7.20	35.34
AV	5.377G	45.23	54.00	-8.77	38.83	3	Vertical	230	1.77	-	34.55	7.20	35.35
PK	5.4624G	58.62	68.20	-9.58	52.19	3	Vertical	230	1.77	-	34.52	7.26	35.35
PK	5.7284G	122.29	Inf	-Inf	116.11	3	Vertical	230	1.77	-	34.24	7.40	35.46
AV	5.7284G	112.18	Inf	-Inf	106.00	3	Vertical	230	1.77	-	34.24	7.40	35.46
PK	5.888G	59.77	68.20	-8.43	53.29	3	Vertical	230	1.77	-	34.53	7.49	35.54

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

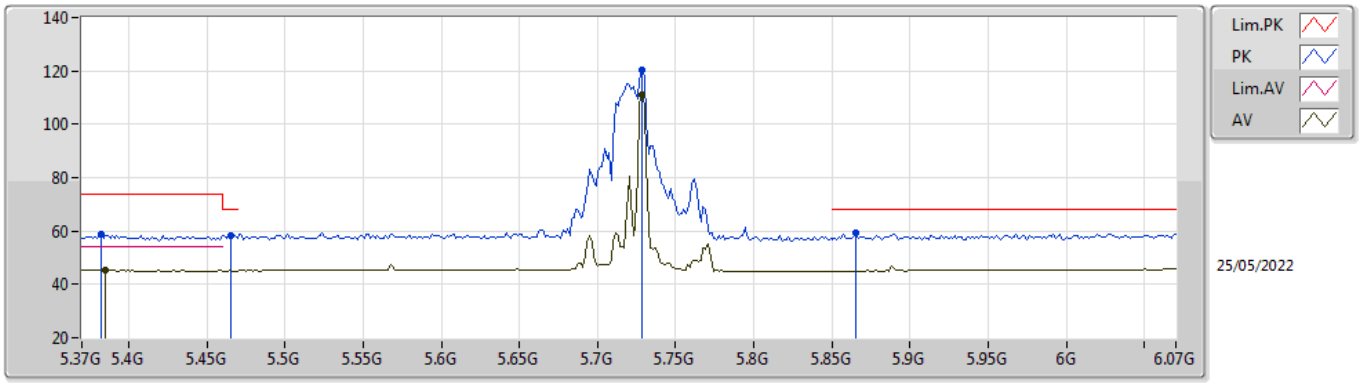


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3826G	58.91	74.00	-15.09	52.49	3	Horizontal	201	1.80	-	34.57	7.20	35.35
AV	5.3854G	45.24	54.00	-8.76	38.82	3	Horizontal	201	1.80	-	34.57	7.20	35.35
PK	5.4652G	58.43	68.20	-9.77	51.98	3	Horizontal	201	1.80	-	34.53	7.27	35.35
PK	5.7284G	120.37	Inf	-Inf	114.19	3	Horizontal	201	1.80	-	34.24	7.40	35.46
AV	5.7284G	110.91	Inf	-Inf	104.73	3	Horizontal	201	1.80	-	34.24	7.40	35.46
PK	5.8656G	59.09	68.20	-9.11	52.76	3	Horizontal	201	1.80	-	34.39	7.47	35.53

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

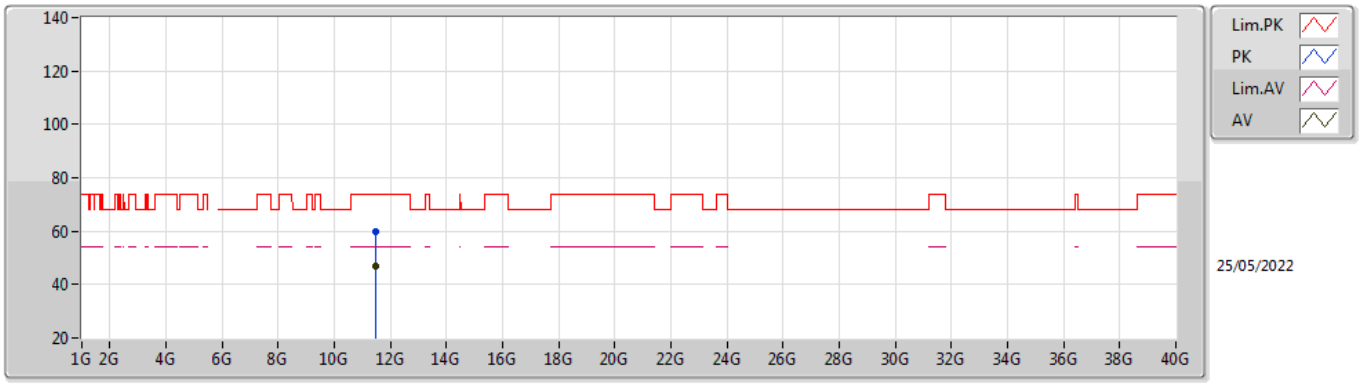


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4574G	59.97	74.00	-14.03	45.89	3	Vertical	327	1.80	-	38.91	10.72	35.55
AV	11.4572G	46.98	54.00	-7.02	32.90	3	Vertical	327	1.80	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

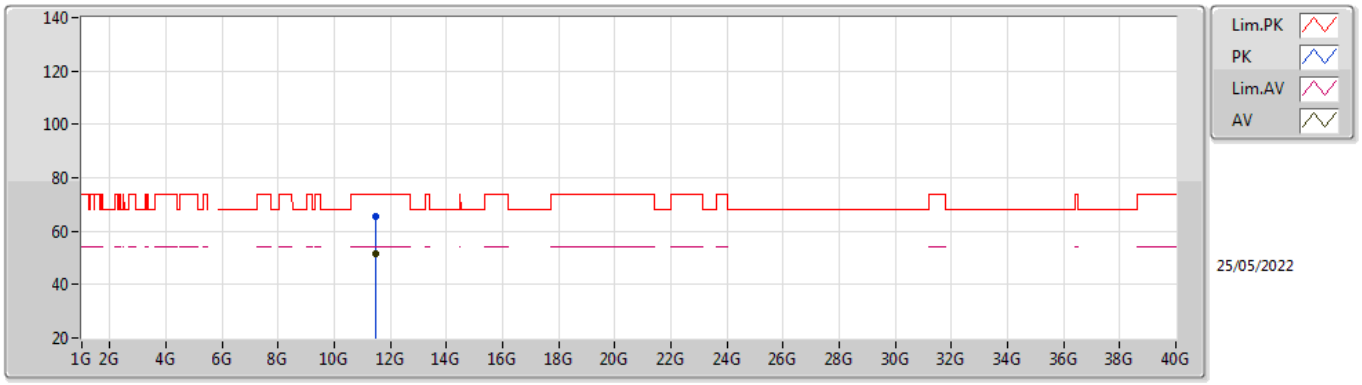


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4578G	65.44	74.00	-8.56	51.35	3	Horizontal	195	1.99	-	38.92	10.72	35.55
AV	11.4576G	51.42	54.00	-2.58	37.33	3	Horizontal	195	1.99	-	38.92	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

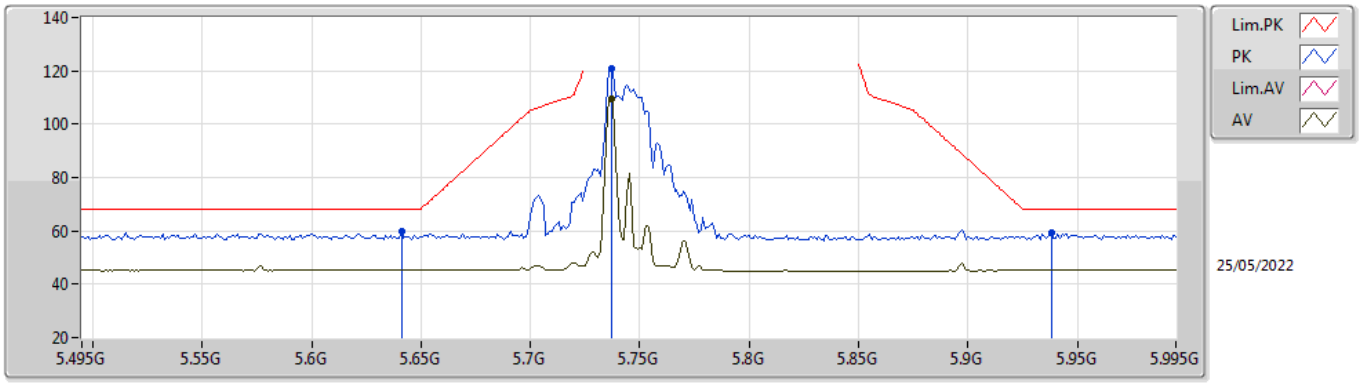


EUT X_2TX
Setting 19.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.641G	59.66	68.20	-8.54	53.16	3	Vertical	227	1.89	-	34.52	7.40	35.42
PK	5.737G	120.72	Inf	-Inf	114.56	3	Vertical	227	1.89	-	34.23	7.40	35.47
AV	5.737G	109.35	Inf	-Inf	103.19	3	Vertical	227	1.89	-	34.23	7.40	35.47
PK	5.938G	59.09	68.20	-9.11	52.37	3	Vertical	227	1.89	-	34.75	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

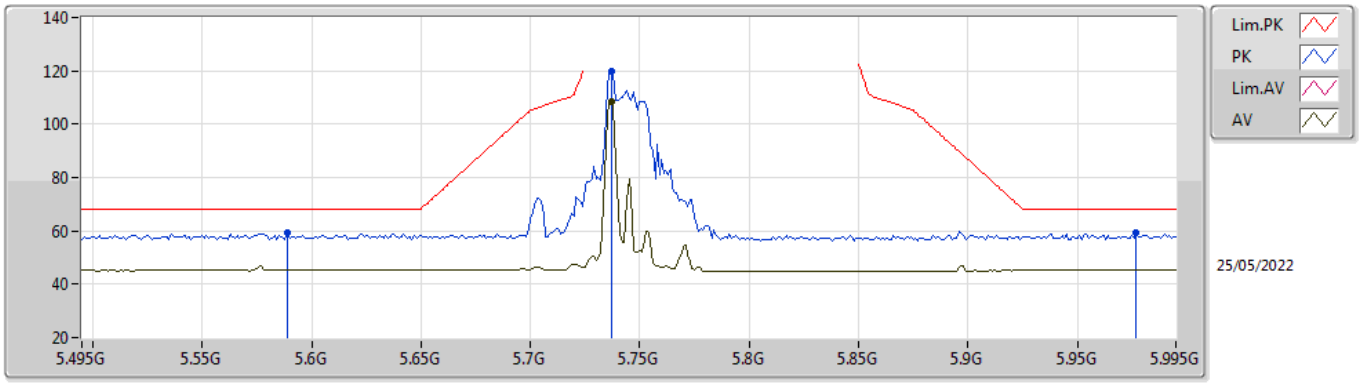


EUT X_2TX
Setting 19.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.589G	59.09	68.20	-9.11	52.49	3	Horizontal	201	1.80	-	34.60	7.39	35.39
PK	5.737G	119.69	Inf	-Inf	113.53	3	Horizontal	201	1.80	-	34.23	7.40	35.47
AV	5.737G	108.29	Inf	-Inf	102.13	3	Horizontal	201	1.80	-	34.23	7.40	35.47
PK	5.977G	59.27	68.20	-8.93	52.48	3	Horizontal	201	1.80	-	34.80	7.58	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

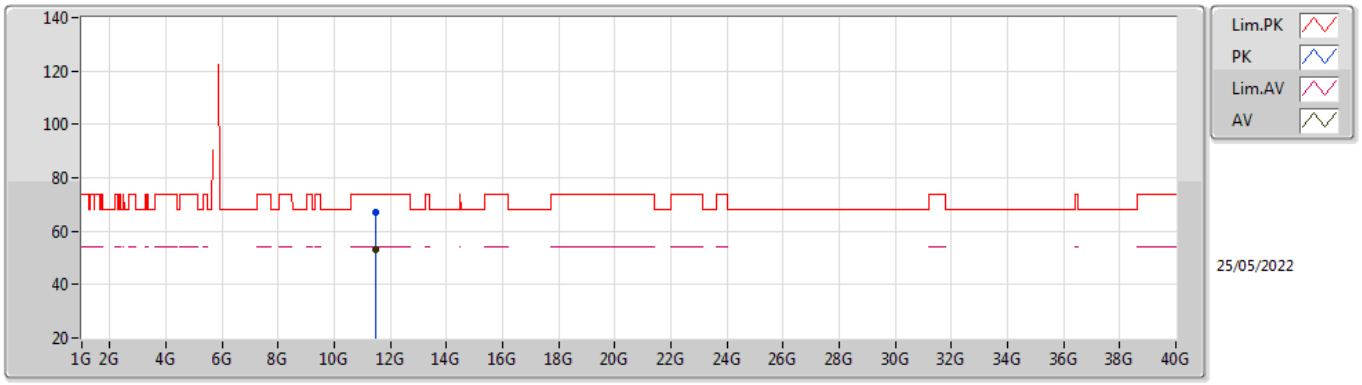


EUT X_2TX
Setting 19.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4726G	67.12	74.00	-6.88	53.02	3	Vertical	179	2.79	-	38.95	10.72	35.57
AV	11.4728G	53.36	54.00	-0.64	39.26	3	Vertical	179	2.79	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

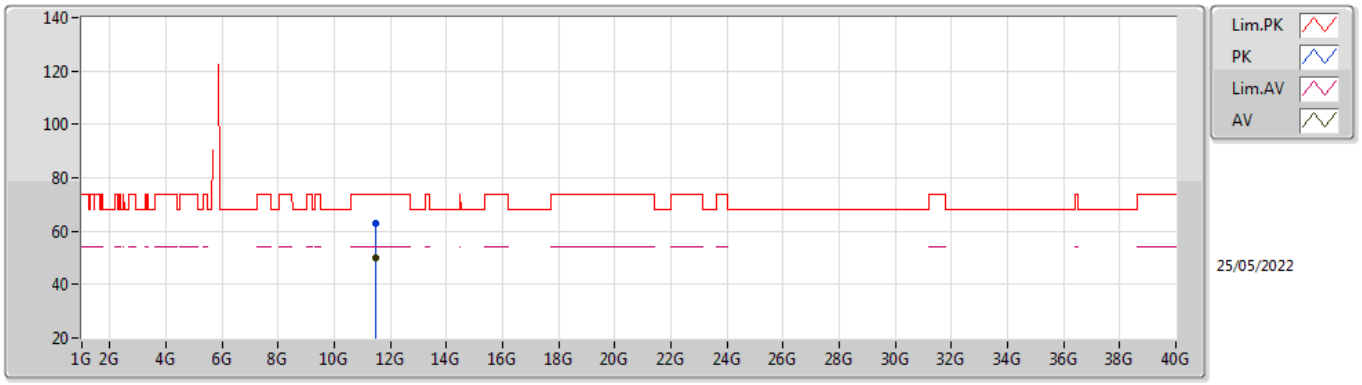


EUT X_2TX
Setting 19.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4726G	63.03	74.00	-10.97	48.93	3	Horizontal	197	1.80	-	38.95	10.72	35.57
AV	11.4728G	50.22	54.00	-3.78	36.12	3	Horizontal	197	1.80	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

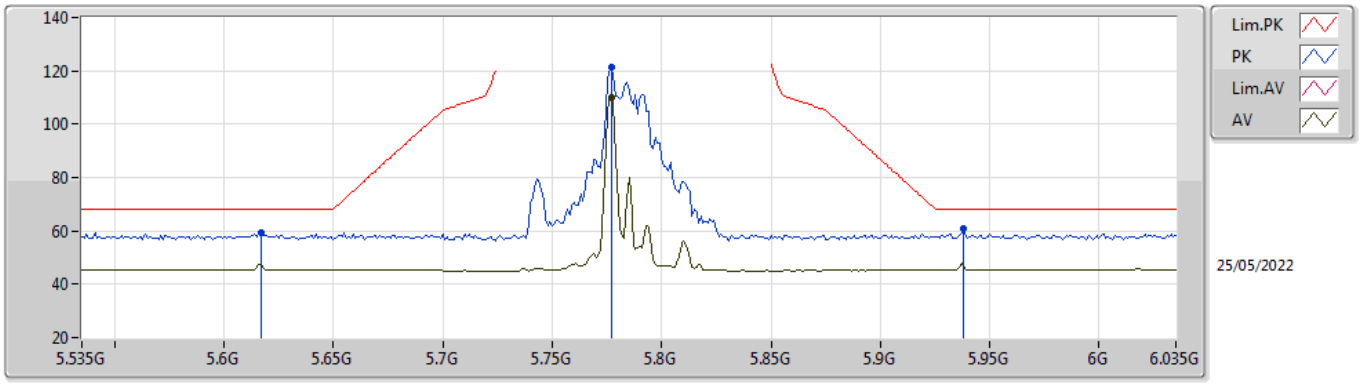


EUT X_2TX
Setting 19.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.617G	59.51	68.20	-8.69	52.95	3	Vertical	228	1.76	-	34.57	7.40	35.41
PK	5.777G	121.42	Inf	-Inf	115.31	3	Vertical	228	1.76	-	34.20	7.40	35.49
AV	5.777G	110.08	Inf	-Inf	103.97	3	Vertical	228	1.76	-	34.20	7.40	35.49
PK	5.938G	60.93	68.20	-7.27	54.21	3	Vertical	228	1.76	-	34.75	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

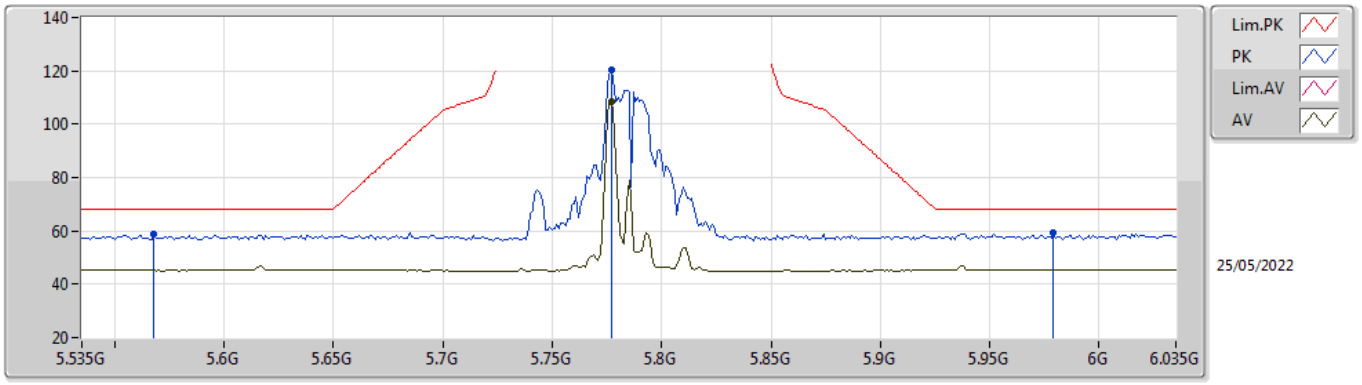


EUT X_2TX
Setting 19.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.568G	58.68	68.20	-9.52	52.09	3	Horizontal	187	1.89	-	34.60	7.37	35.38
PK	5.777G	120.16	Inf	-Inf	114.05	3	Horizontal	187	1.89	-	34.20	7.40	35.49
AV	5.777G	108.51	Inf	-Inf	102.40	3	Horizontal	187	1.89	-	34.20	7.40	35.49
PK	5.979G	59.09	68.20	-9.11	52.30	3	Horizontal	187	1.89	-	34.80	7.58	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

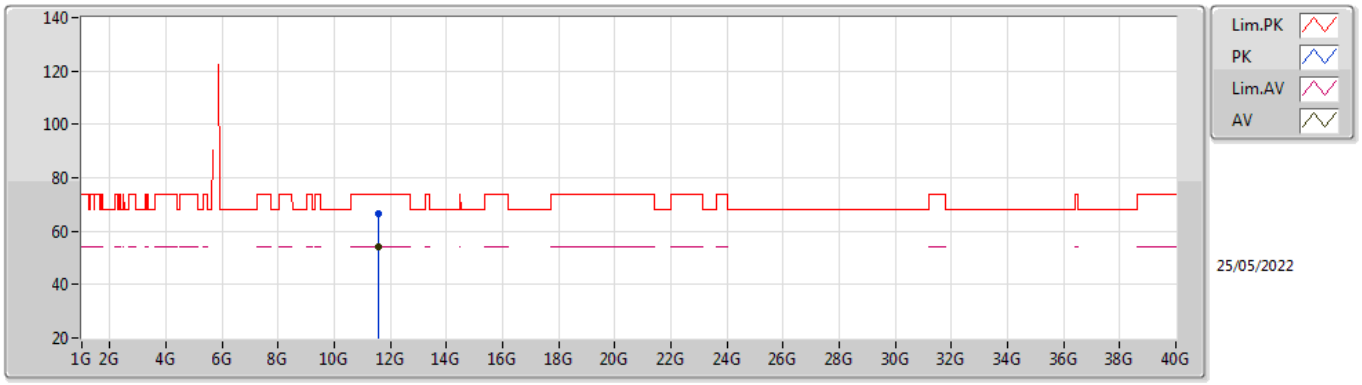


EUT X_2TX
Setting 19.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5544G	66.76	74.00	-7.24	52.40	3	Vertical	177	2.94	-	39.22	10.73	35.59
AV	11.5528G	53.95	54.00	-0.05	39.60	3	Vertical	177	2.94	-	39.21	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

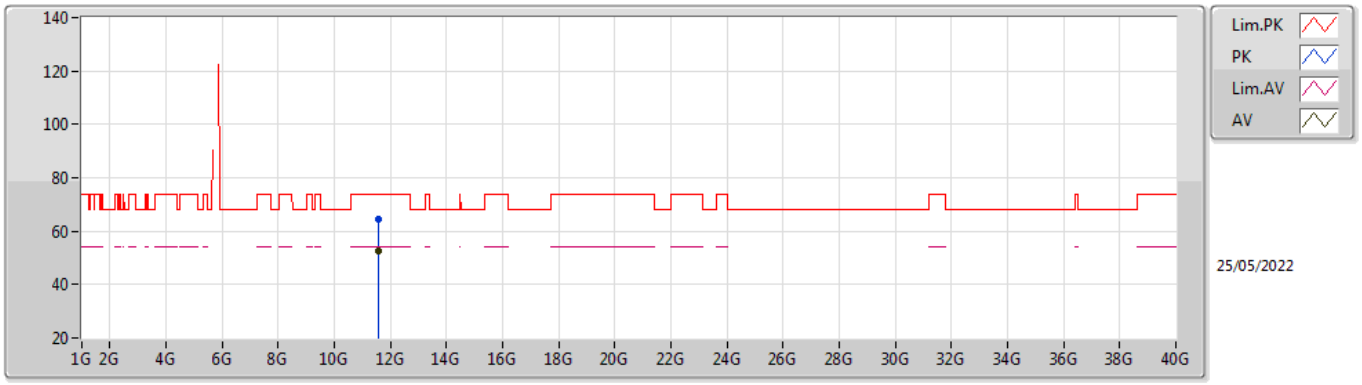


EUT X_2TX
Setting 19.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.553G	64.57	74.00	-9.43	50.22	3	Horizontal	194	1.95	-	39.21	10.73	35.59
AV	11.553G	52.79	54.00	-1.21	38.44	3	Horizontal	194	1.95	-	39.21	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

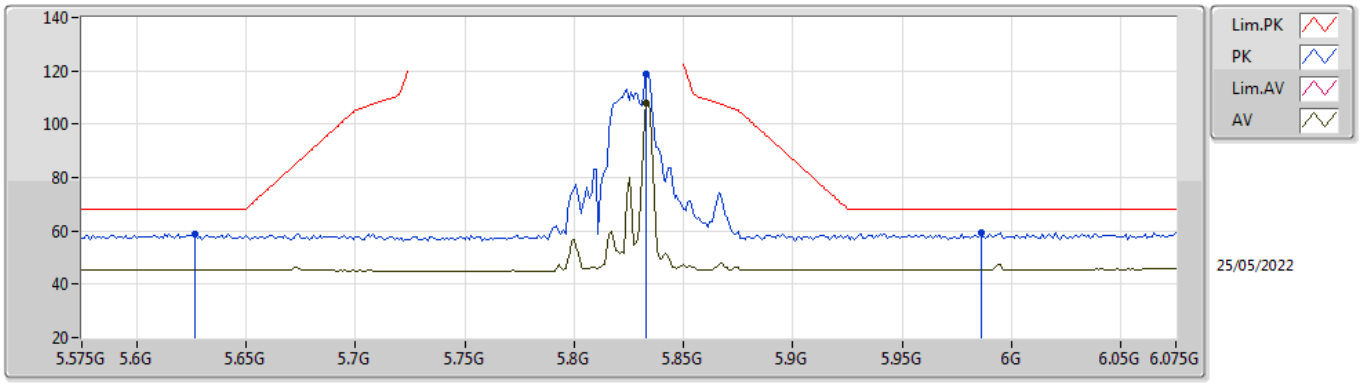


EUT X_2TX
Setting 18.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.627G	58.83	68.20	-9.37	52.29	3	Vertical	230	1.80	-	34.55	7.40	35.41
PK	5.833G	118.95	Inf	-Inf	112.77	3	Vertical	230	1.80	-	34.27	7.43	35.52
AV	5.833G	107.82	Inf	-Inf	101.64	3	Vertical	230	1.80	-	34.27	7.43	35.52
PK	5.986G	59.52	68.20	-8.68	52.72	3	Vertical	230	1.80	-	34.80	7.59	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

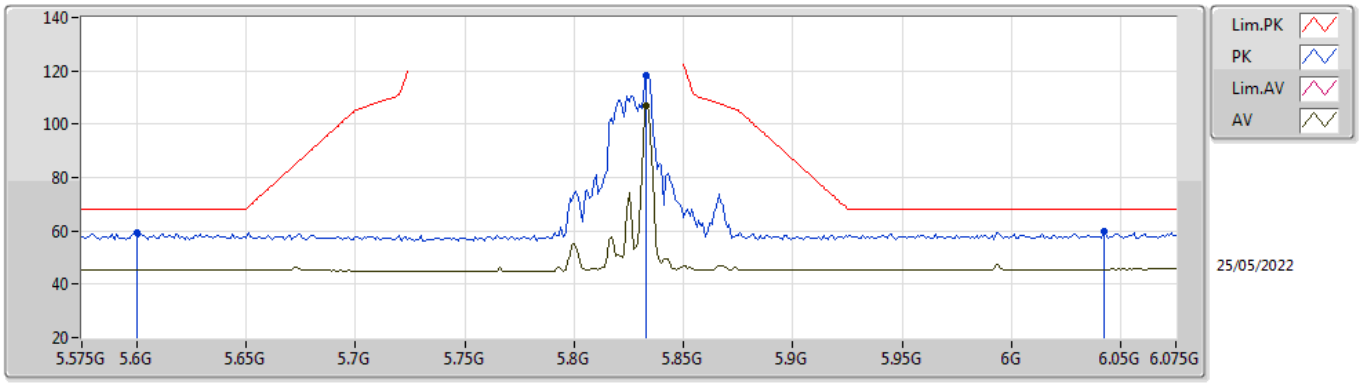


EUT X_2TX
Setting 18.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.6G	59.13	68.20	-9.07	52.53	3	Horizontal	181	1.80	-	34.60	7.40	35.40
PK	5.833G	118.06	Inf	-Inf	111.88	3	Horizontal	181	1.80	-	34.27	7.43	35.52
AV	5.833G	106.85	Inf	-Inf	100.67	3	Horizontal	181	1.80	-	34.27	7.43	35.52
PK	6.042G	59.84	68.20	-8.36	52.92	3	Horizontal	181	1.80	-	34.88	7.62	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

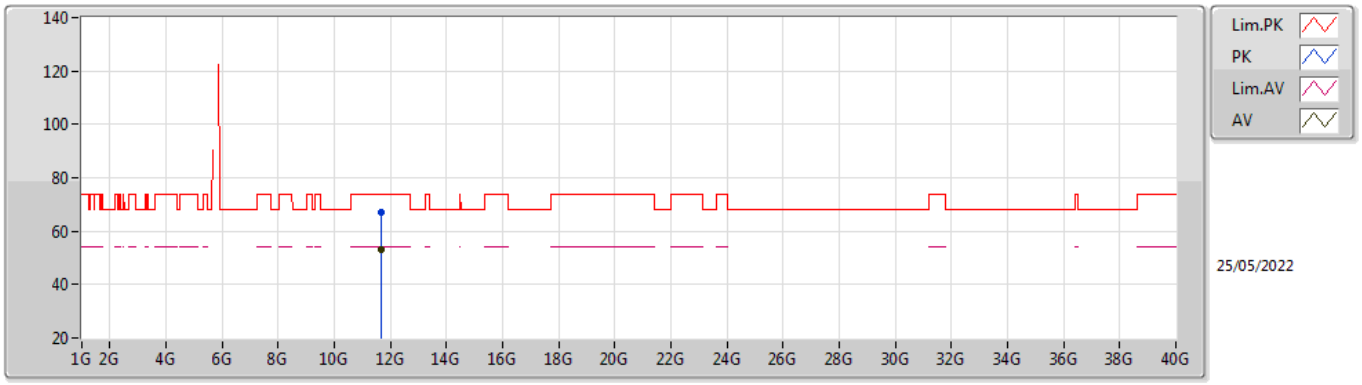


EUT X_2TX
Setting 18.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6672G	67.05	74.00	-6.95	52.46	3	Vertical	177	2.75	-	39.40	10.75	35.56
AV	11.667G	53.25	54.00	-0.75	38.66	3	Vertical	177	2.75	-	39.40	10.75	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

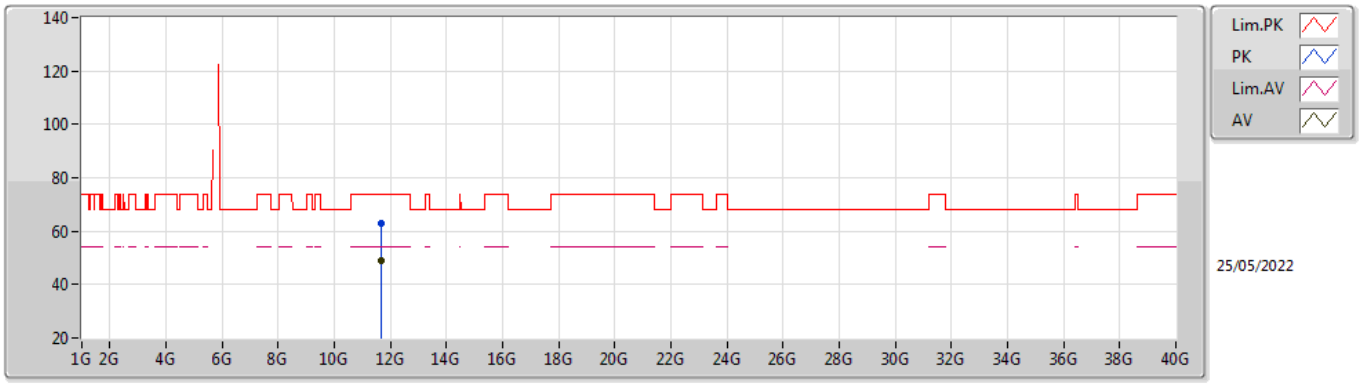

EUT X_2TX
Setting 18.5
03-B-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6674G	62.89	74.00	-11.11	48.30	3	Horizontal	199	1.80	-	39.40	10.75	35.56
AV	11.6674G	48.83	54.00	-5.17	34.24	3	Horizontal	199	1.80	-	39.40	10.75	35.56

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	PK	5.7258G	68.14	68.20	-0.06	3	Vertical	230	1.80	-

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

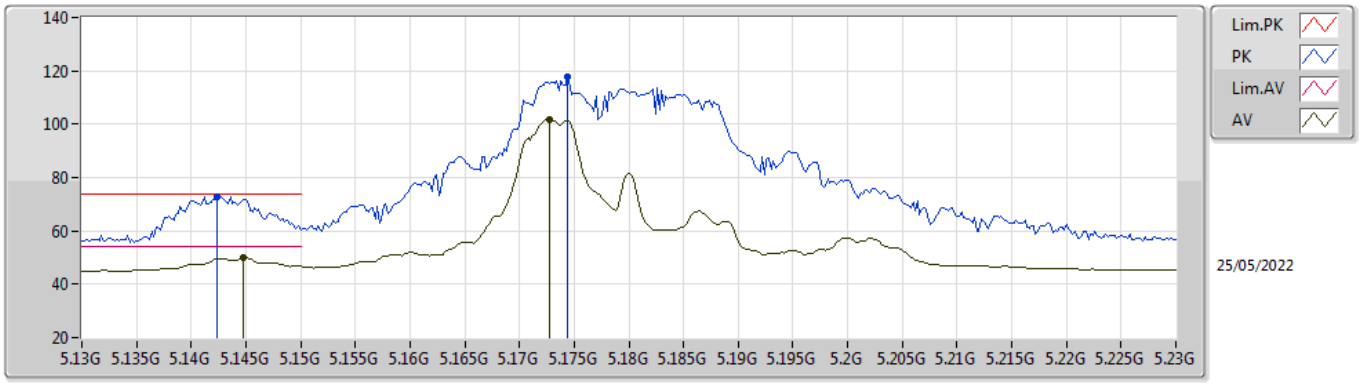


EUT X_2TX
Setting 20
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1424G	72.88	74.00	-1.12	67.07	3	Vertical	259	1.80	-	33.98	7.17	35.34
AV	5.1448G	49.91	54.00	-4.09	44.09	3	Vertical	259	1.80	-	33.99	7.17	35.34
PK	5.1744G	117.81	Inf	-Inf	111.86	3	Vertical	259	1.80	-	34.10	7.19	35.34
AV	5.1728G	101.81	Inf	-Inf	95.87	3	Vertical	259	1.80	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

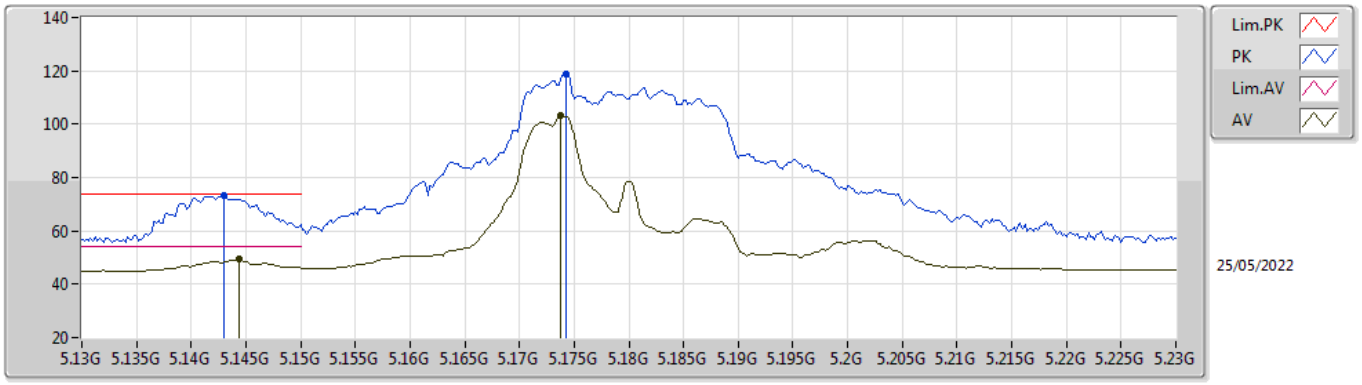


EUT X_2TX
Setting 20
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.143G	73.50	74.00	-0.50	67.68	3	Horizontal	208	1.80	-	33.99	7.17	35.34
AV	5.1444G	49.30	54.00	-4.70	43.48	3	Horizontal	208	1.80	-	33.99	7.17	35.34
PK	5.1742G	118.84	Inf	-Inf	112.89	3	Horizontal	208	1.80	-	34.10	7.19	35.34
AV	5.1738G	103.07	Inf	-Inf	97.12	3	Horizontal	208	1.80	-	34.10	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

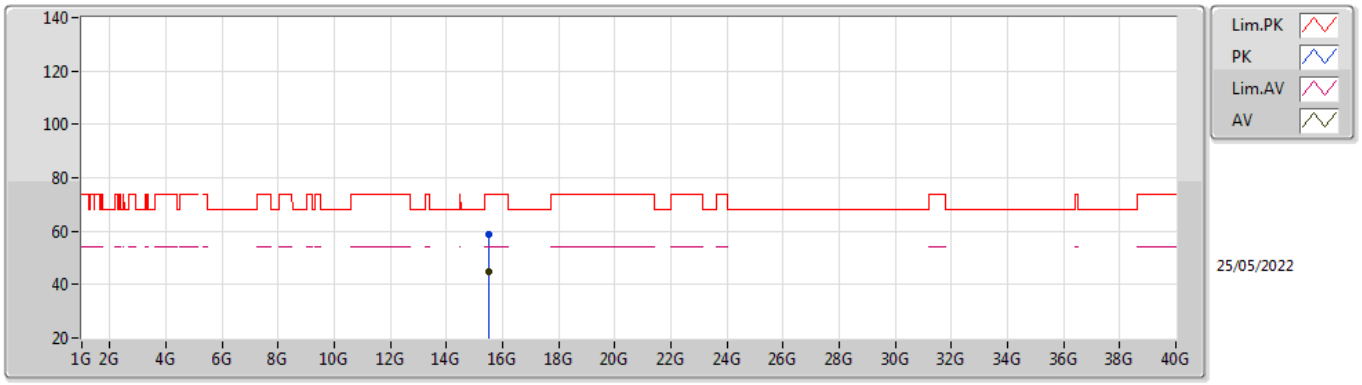


EUT X_2TX
Setting 20
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5002G	58.59	74.00	-15.41	42.11	3	Vertical	5	1.98	-	38.70	13.15	35.37
AV	15.5038G	44.91	54.00	-9.09	28.46	3	Vertical	5	1.98	-	38.67	13.15	35.37

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

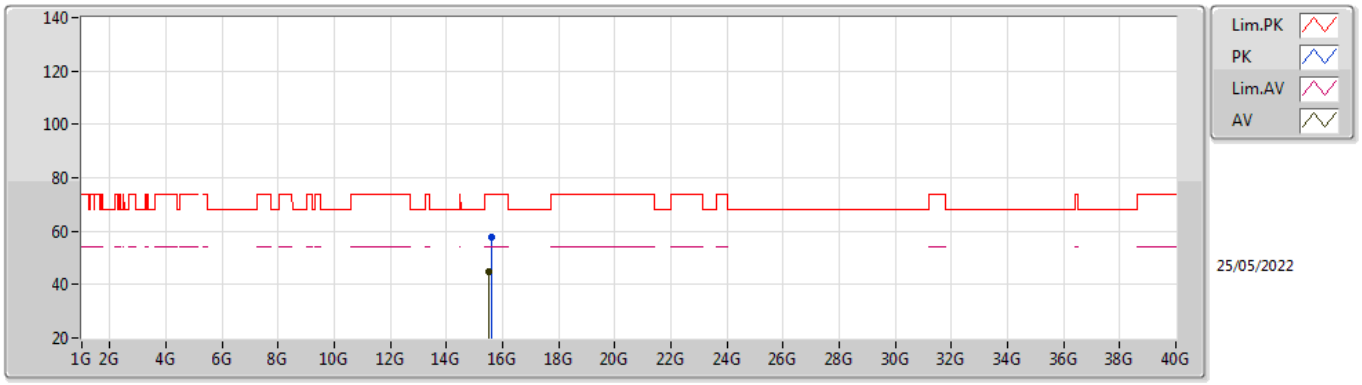


EUT X_2TX
Setting 20
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5862G	57.95	74.00	-16.05	42.10	3	Horizontal	4	1.71	-	38.10	13.19	35.44
AV	15.5038G	44.90	54.00	-9.10	28.45	3	Horizontal	4	1.71	-	38.67	13.15	35.37

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

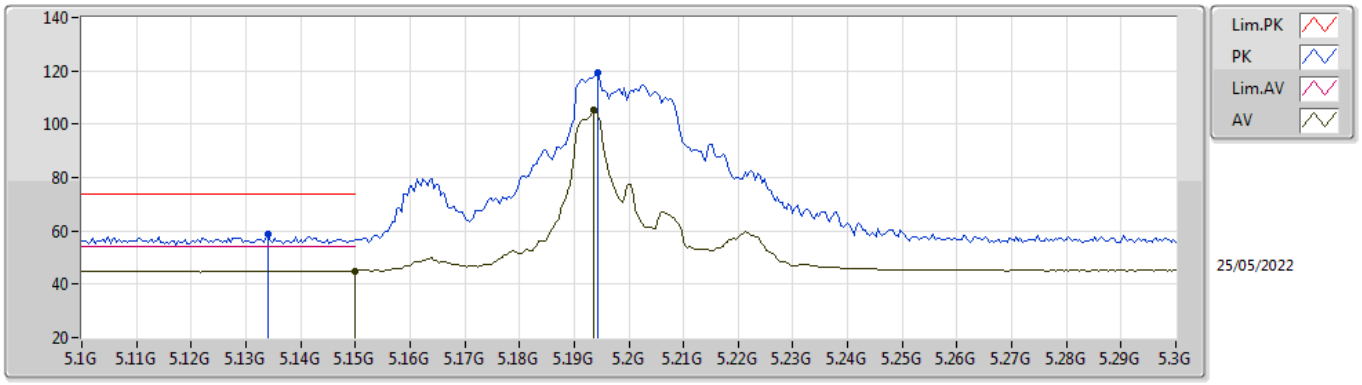


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.134G	58.54	74.00	-15.46	52.74	3	Vertical	257	1.80	-	33.97	7.17	35.34
AV	5.15G	44.97	54.00	-9.03	39.14	3	Vertical	257	1.80	-	34.00	7.17	35.34
PK	5.1944G	119.44	Inf	-Inf	113.40	3	Vertical	257	1.80	-	34.18	7.20	35.34
AV	5.1936G	105.42	Inf	-Inf	99.39	3	Vertical	257	1.80	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

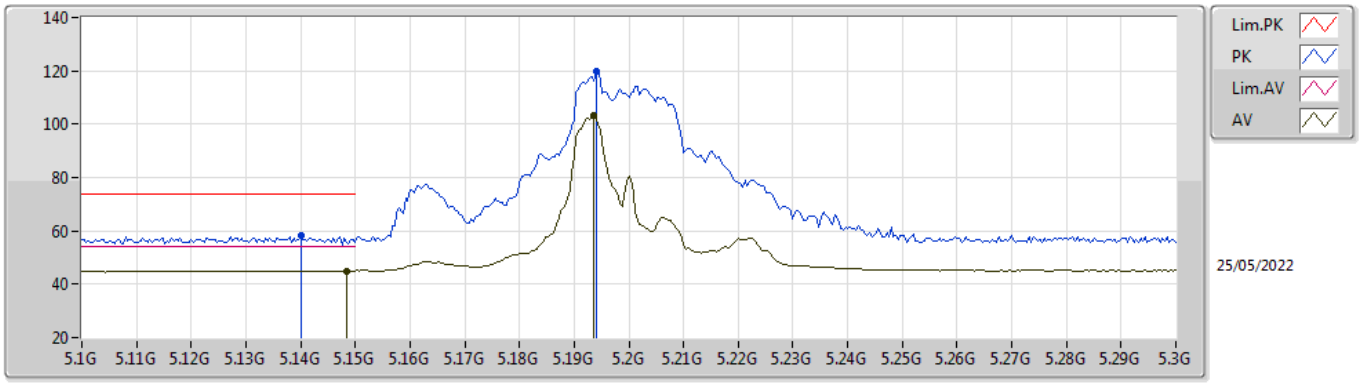


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.14G	58.07	74.00	-15.93	52.26	3	Horizontal	210	1.80	-	33.98	7.17	35.34
AV	5.1484G	44.91	54.00	-9.09	39.08	3	Horizontal	210	1.80	-	34.00	7.17	35.34
PK	5.194G	119.85	Inf	-Inf	113.81	3	Horizontal	210	1.80	-	34.18	7.20	35.34
AV	5.1936G	103.18	Inf	-Inf	97.15	3	Horizontal	210	1.80	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

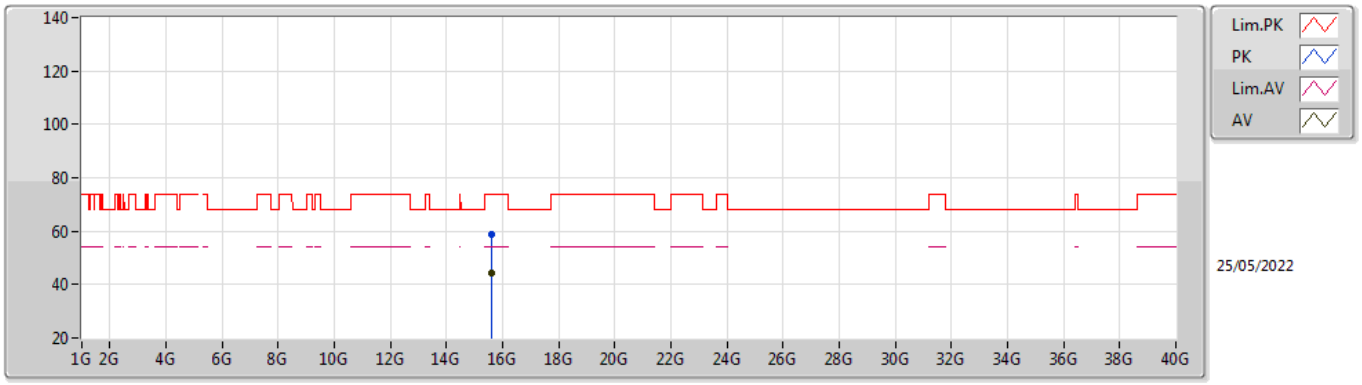


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5862G	58.57	74.00	-15.43	42.72	3	Vertical	11	2.66	-	38.10	13.19	35.44
AV	15.5844G	44.16	54.00	-9.84	28.30	3	Vertical	11	2.66	-	38.11	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

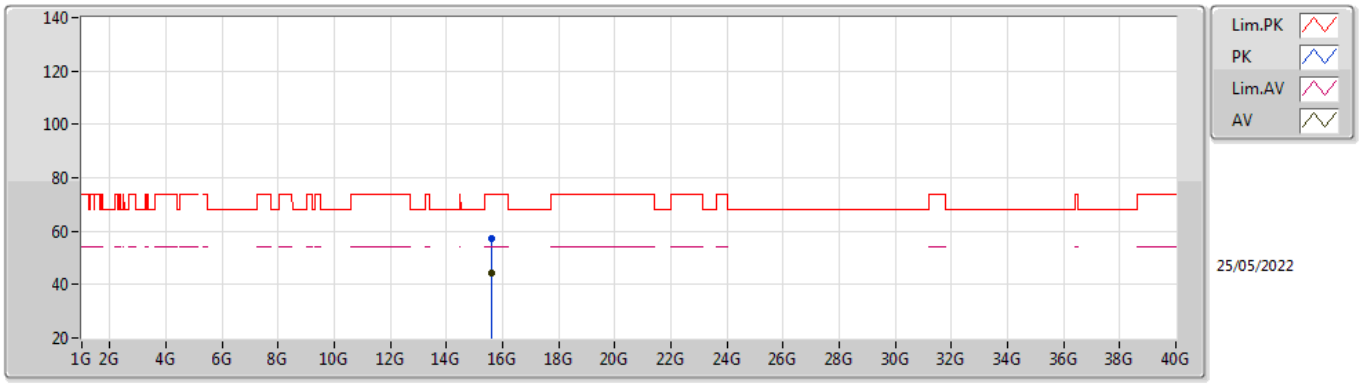


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6162G	57.39	74.00	-16.61	41.73	3	Horizontal	357	2.28	-	37.92	13.21	35.47
AV	15.588G	44.13	54.00	-9.87	28.30	3	Horizontal	357	2.28	-	38.08	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

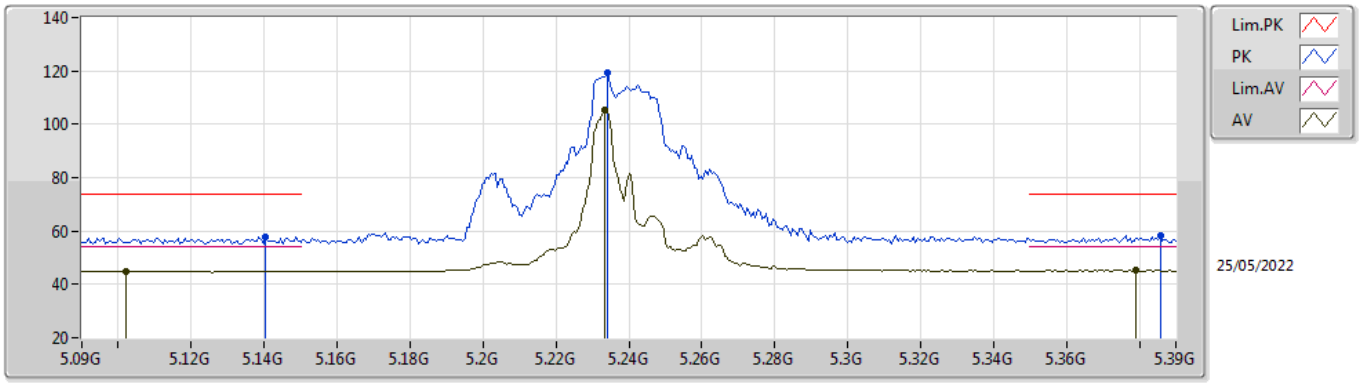


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1404G	57.68	74.00	-16.32	51.87	3	Vertical	262	1.80	-	33.98	7.17	35.34
AV	5.102G	44.84	54.00	-9.16	39.12	3	Vertical	262	1.80	-	33.90	7.15	35.33
PK	5.234G	119.53	Inf	-Inf	113.33	3	Vertical	262	1.80	-	34.34	7.20	35.34
AV	5.2334G	105.11	Inf	-Inf	98.92	3	Vertical	262	1.80	-	34.33	7.20	35.34
PK	5.3858G	58.12	74.00	-15.88	51.70	3	Vertical	262	1.80	-	34.57	7.20	35.35
AV	5.3792G	45.18	54.00	-8.82	38.77	3	Vertical	262	1.80	-	34.56	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

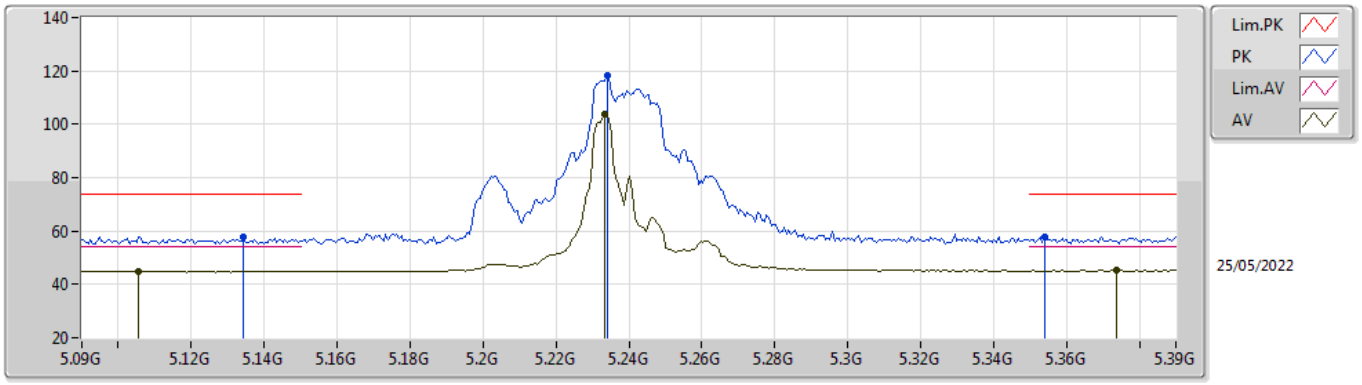


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1344G	57.73	74.00	-16.27	51.93	3	Horizontal	217	1.09	-	33.97	7.17	35.34
AV	5.1056G	44.81	54.00	-9.19	39.08	3	Horizontal	217	1.09	-	33.91	7.15	35.33
PK	5.234G	118.28	Inf	-Inf	112.08	3	Horizontal	217	1.09	-	34.34	7.20	35.34
AV	5.2334G	103.98	Inf	-Inf	97.79	3	Horizontal	217	1.09	-	34.33	7.20	35.34
PK	5.354G	57.80	74.00	-16.20	51.43	3	Horizontal	217	1.09	-	34.51	7.20	35.34
AV	5.3738G	45.20	54.00	-8.80	38.79	3	Horizontal	217	1.09	-	34.55	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

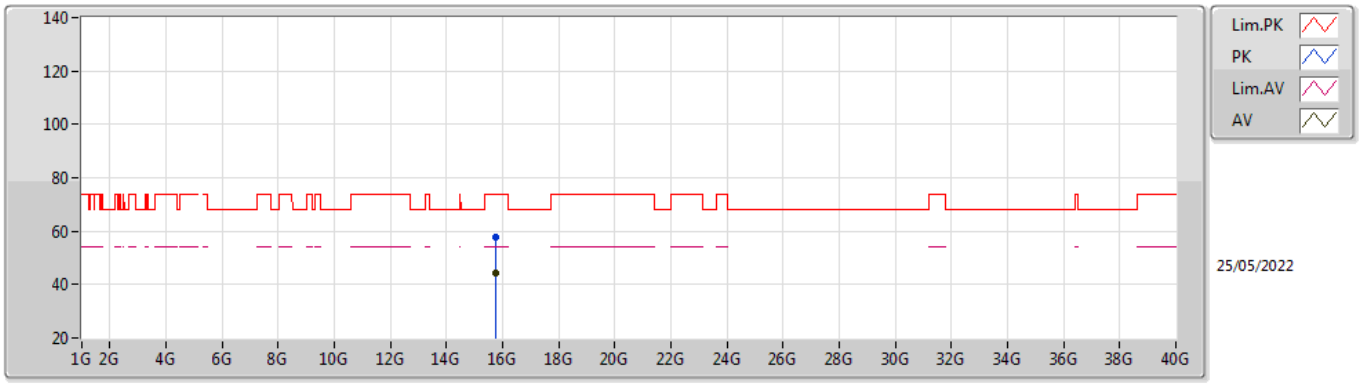


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7664G	57.55	74.00	-16.45	42.09	3	Vertical	123	2.40	-	37.77	13.28	35.59
AV	15.7694G	44.15	54.00	-9.85	28.69	3	Vertical	123	2.40	-	37.78	13.28	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

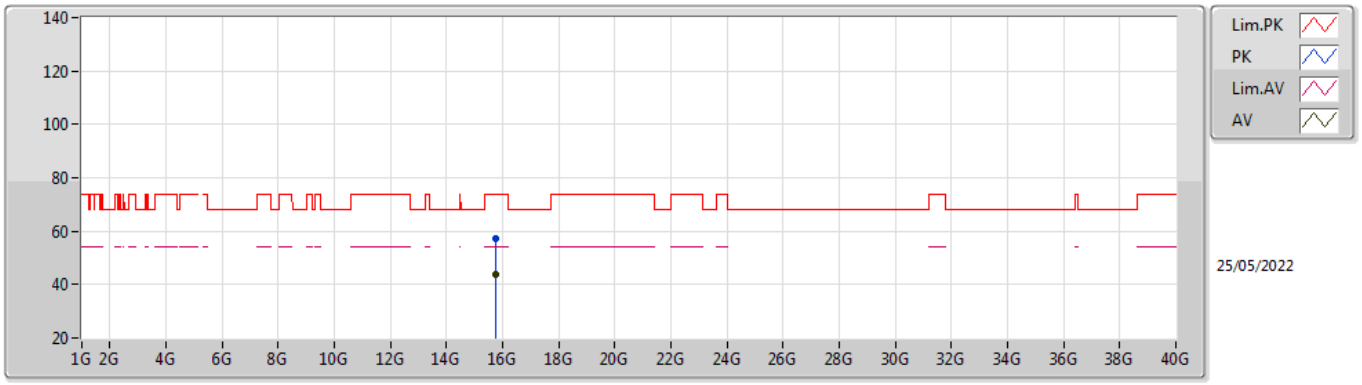


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.745G	57.34	74.00	-16.66	41.97	3	Horizontal	243	2.90	-	37.68	13.27	35.58
AV	15.7688G	43.98	54.00	-10.02	28.52	3	Horizontal	243	2.90	-	37.78	13.28	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

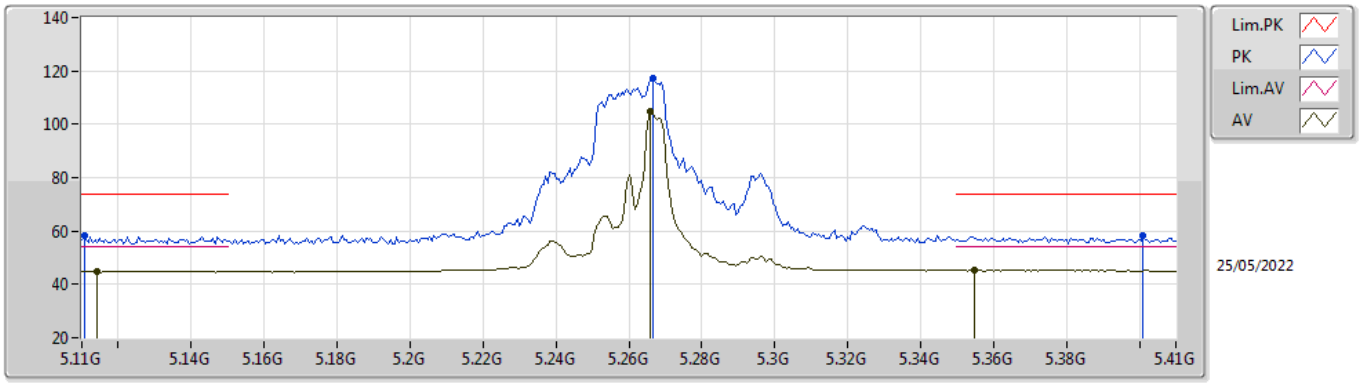


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1106G	58.19	74.00	-15.81	52.44	3	Vertical	302	1.80	-	33.92	7.16	35.33
AV	5.1142G	44.79	54.00	-9.21	39.03	3	Vertical	302	1.80	-	33.93	7.16	35.33
PK	5.2666G	117.45	Inf	-Inf	111.16	3	Vertical	302	1.80	-	34.43	7.20	35.34
AV	5.266G	104.81	Inf	-Inf	98.52	3	Vertical	302	1.80	-	34.43	7.20	35.34
PK	5.401G	58.13	74.00	-15.87	51.68	3	Vertical	302	1.80	-	34.60	7.20	35.35
AV	5.3548G	45.22	54.00	-8.78	38.85	3	Vertical	302	1.80	-	34.51	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

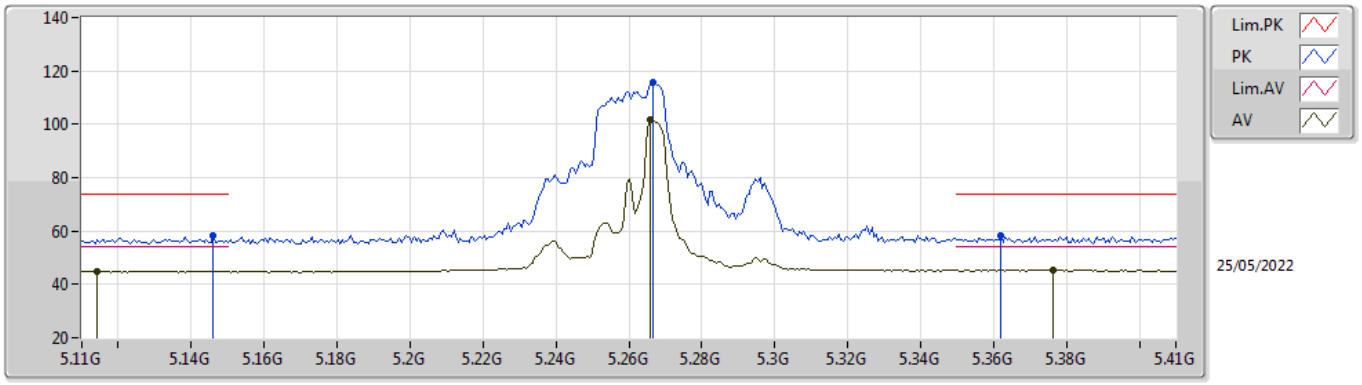


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.146G	58.19	74.00	-15.81	52.37	3	Horizontal	201	1.80	-	33.99	7.17	35.34
AV	5.1142G	44.75	54.00	-9.25	38.99	3	Horizontal	201	1.80	-	33.93	7.16	35.33
PK	5.2666G	115.88	Inf	-Inf	109.59	3	Horizontal	201	1.80	-	34.43	7.20	35.34
AV	5.266G	101.59	Inf	-Inf	95.30	3	Horizontal	201	1.80	-	34.43	7.20	35.34
PK	5.362G	58.24	74.00	-15.76	51.86	3	Horizontal	201	1.80	-	34.52	7.20	35.34
AV	5.3764G	45.24	54.00	-8.76	38.84	3	Horizontal	201	1.80	-	34.55	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

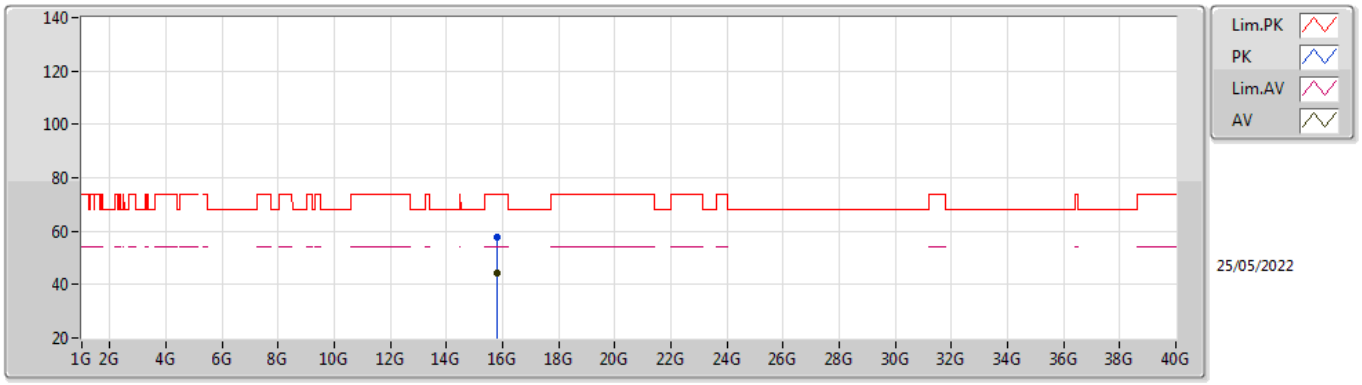


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.8046G	57.51	74.00	-16.49	41.95	3	Vertical	46	1.82	-	37.89	13.30	35.63
AV	15.8002G	44.35	54.00	-9.65	28.77	3	Vertical	46	1.82	-	37.90	13.30	35.62

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

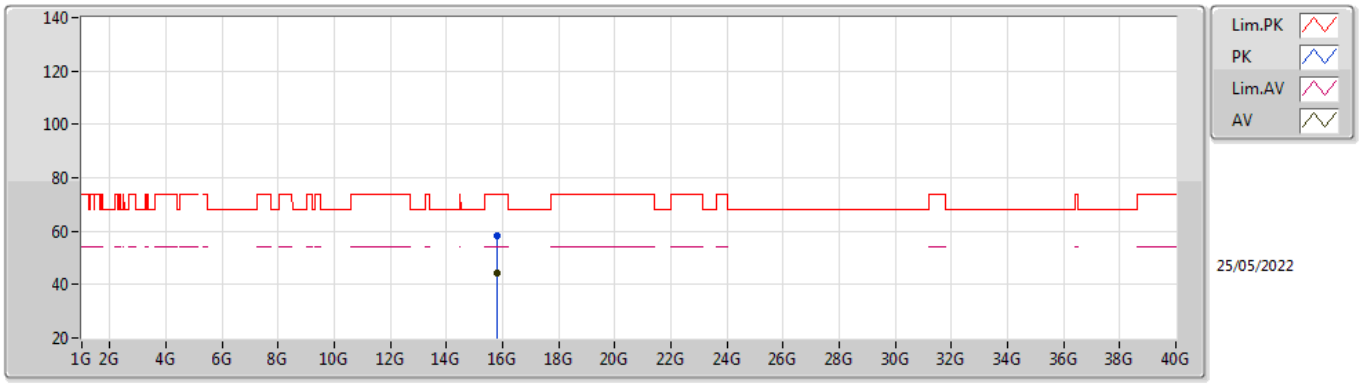


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.8066G	58.39	74.00	-15.61	42.84	3	Horizontal	243	2.91	-	37.88	13.30	35.63
AV	15.8264G	44.34	54.00	-9.66	28.85	3	Horizontal	243	2.91	-	37.82	13.31	35.64

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

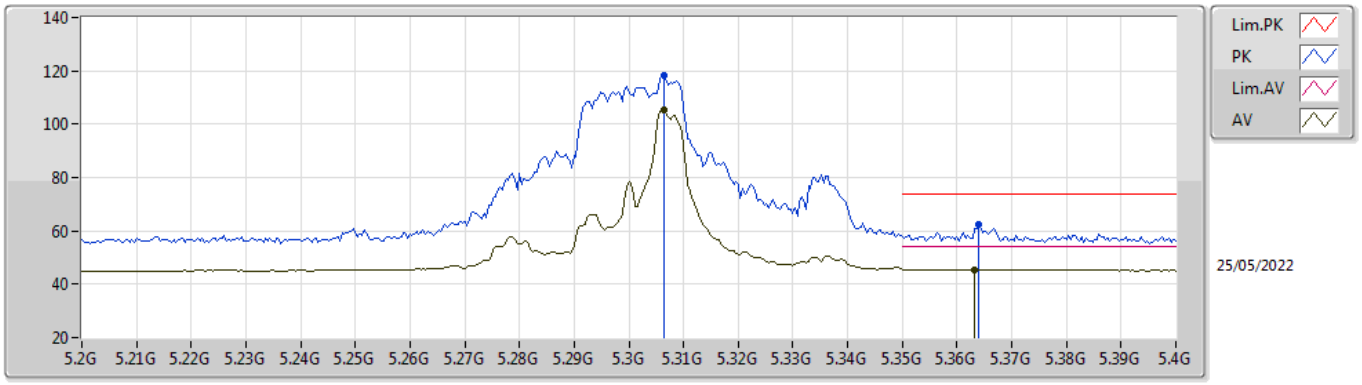


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3064G	118.06	Inf	-Inf	111.70	3	Vertical	300	1.88	-	34.50	7.20	35.34
AV	5.3064G	105.27	Inf	-Inf	98.91	3	Vertical	300	1.88	-	34.50	7.20	35.34
PK	5.364G	62.41	74.00	-11.59	56.02	3	Vertical	300	1.88	-	34.53	7.20	35.34
AV	5.3632G	45.54	54.00	-8.46	39.15	3	Vertical	300	1.88	-	34.53	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

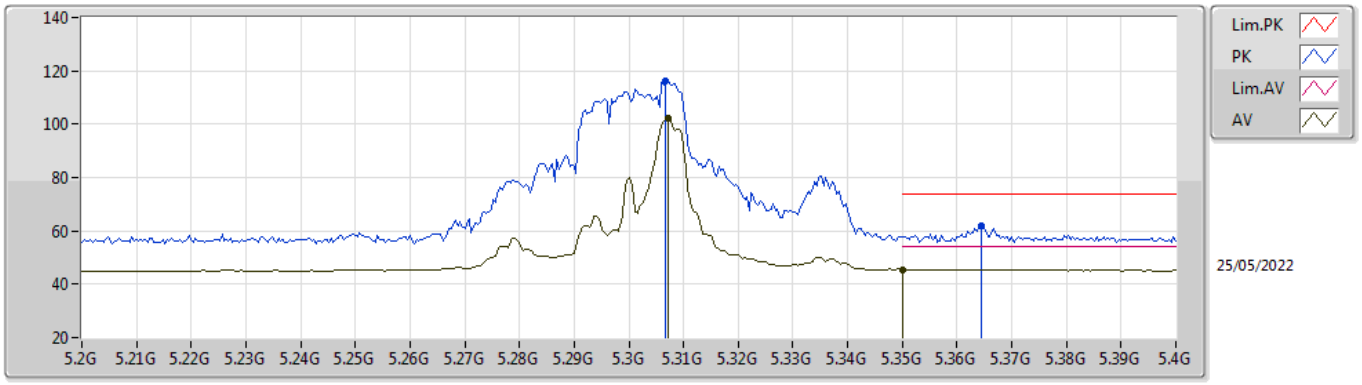


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3068G	116.44	Inf	-Inf	110.08	3	Horizontal	175	1.80	-	34.50	7.20	35.34
AV	5.3072G	102.18	Inf	-Inf	95.82	3	Horizontal	175	1.80	-	34.50	7.20	35.34
PK	5.3644G	61.88	74.00	-12.12	55.49	3	Horizontal	175	1.80	-	34.53	7.20	35.34
AV	5.35G	45.45	54.00	-8.55	39.09	3	Horizontal	175	1.80	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

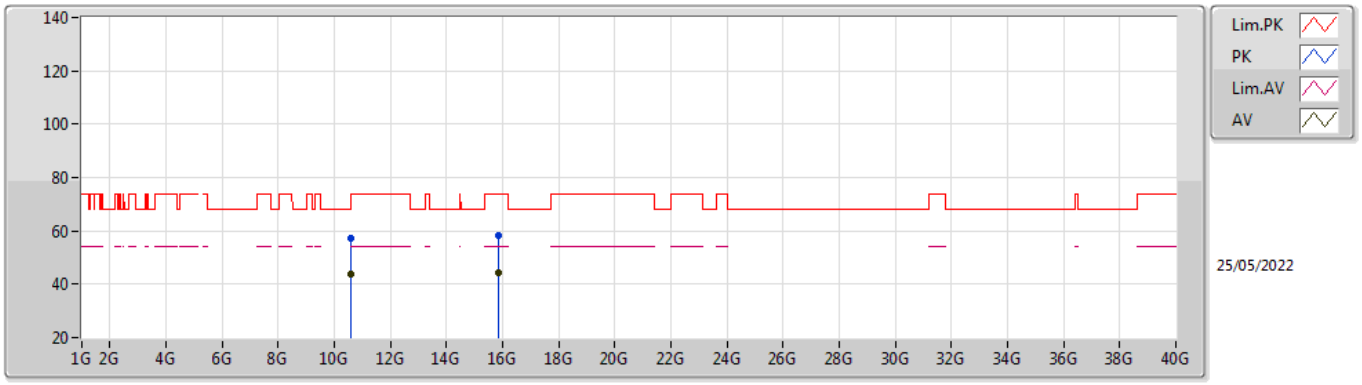


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6144G	57.01	74.00	-16.99	43.56	3	Vertical	224	1.72	-	38.23	10.59	35.37
AV	10.6142G	44.01	54.00	-9.99	30.56	3	Vertical	224	1.72	-	38.23	10.59	35.37
PK	15.8726G	58.02	74.00	-15.98	42.68	3	Vertical	251	2.87	-	37.68	13.34	35.68
AV	15.8746G	44.36	54.00	-9.64	29.02	3	Vertical	251	2.87	-	37.68	13.34	35.68

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

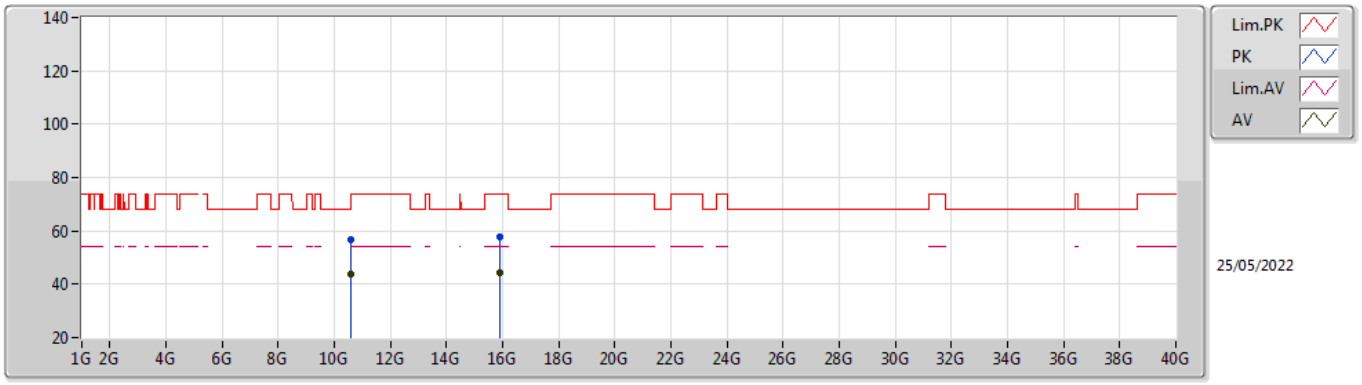


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.614G	56.88	74.00	-17.12	43.43	3	Horizontal	205	1.80	-	38.23	10.59	35.37
AV	10.6142G	44.01	54.00	-9.99	30.56	3	Horizontal	205	1.80	-	38.23	10.59	35.37
PK	15.893G	57.61	74.00	-16.39	42.34	3	Horizontal	261	2.33	-	37.62	13.35	35.70
AV	15.8932G	44.37	54.00	-9.63	29.10	3	Horizontal	261	2.33	-	37.62	13.35	35.70

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

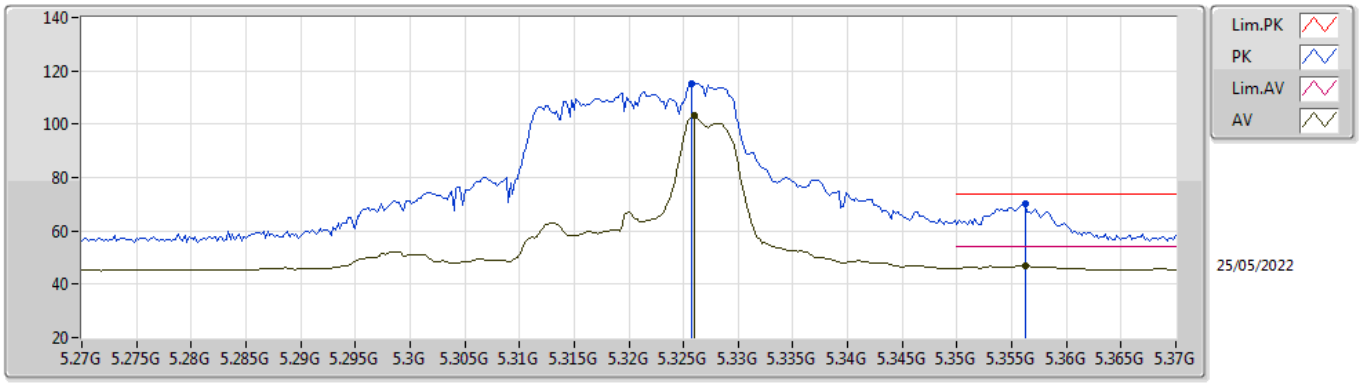


EUT X_2TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3258G	115.23	Inf	-Inf	108.87	3	Vertical	299	1.69	-	34.50	7.20	35.34
AV	5.326G	103.04	Inf	-Inf	96.68	3	Vertical	299	1.69	-	34.50	7.20	35.34
PK	5.3562G	70.28	74.00	-3.72	63.91	3	Vertical	299	1.69	-	34.51	7.20	35.34
AV	5.3562G	47.06	54.00	-6.94	40.69	3	Vertical	299	1.69	-	34.51	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

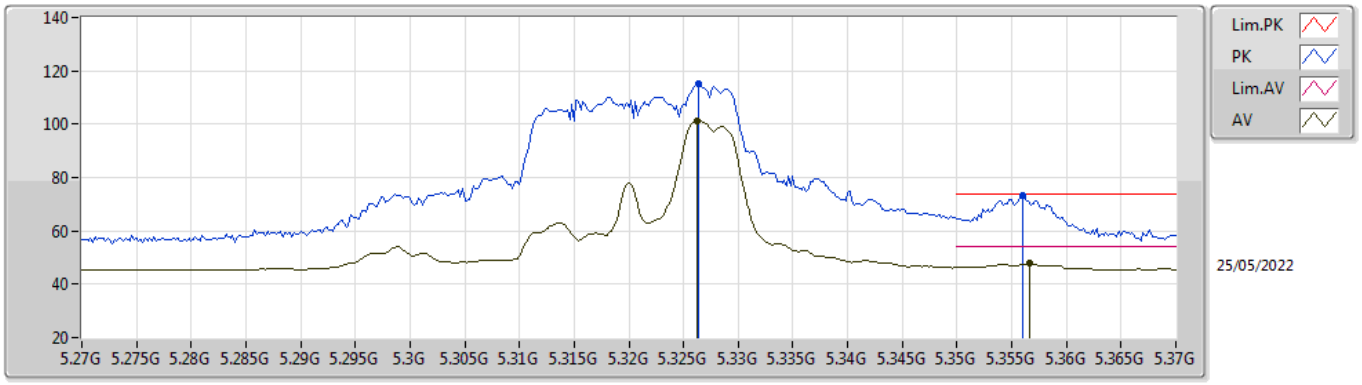


EUT X_2TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3264G	115.26	Inf	-Inf	108.90	3	Horizontal	216	1.80	-	34.50	7.20	35.34
AV	5.3262G	101.43	Inf	-Inf	95.07	3	Horizontal	216	1.80	-	34.50	7.20	35.34
PK	5.356G	73.05	74.00	-0.95	66.68	3	Horizontal	216	1.80	-	34.51	7.20	35.34
AV	5.3566G	47.72	54.00	-6.28	41.35	3	Horizontal	216	1.80	-	34.51	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

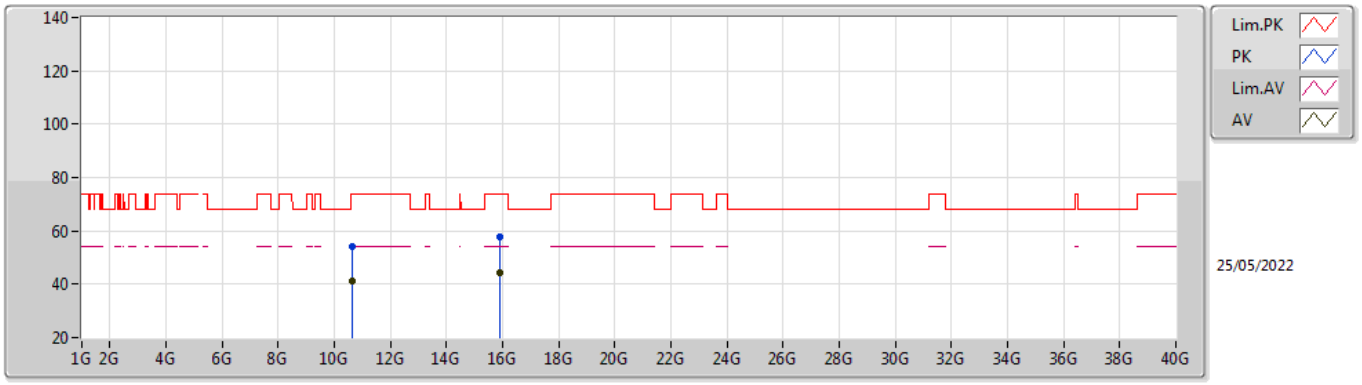


EUT X_2TX
Setting 18
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6544G	54.16	74.00	-19.84	40.59	3	Vertical	312	2.57	-	38.31	10.60	35.34
AV	10.6538G	41.34	54.00	-12.66	27.77	3	Vertical	312	2.57	-	38.31	10.60	35.34
PK	15.9228G	57.67	74.00	-16.33	42.49	3	Vertical	25	1.71	-	37.55	13.36	35.73
AV	15.91G	44.27	54.00	-9.73	29.05	3	Vertical	25	1.71	-	37.58	13.35	35.71

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

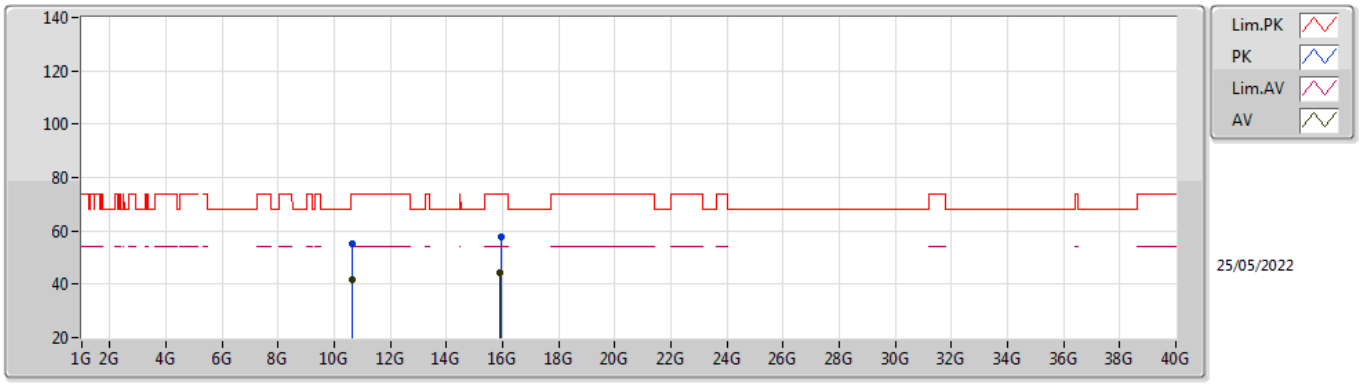


EUT X_2TX
Setting 18
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6538G	55.14	74.00	-18.86	41.57	3	Horizontal	205	1.78	-	38.31	10.60	35.34
AV	10.6538G	41.92	54.00	-12.08	28.35	3	Horizontal	205	1.78	-	38.31	10.60	35.34
PK	15.9606G	57.58	74.00	-16.42	42.48	3	Horizontal	287	2.01	-	37.48	13.38	35.76
AV	15.914G	44.26	54.00	-9.74	29.05	3	Horizontal	287	2.01	-	37.57	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

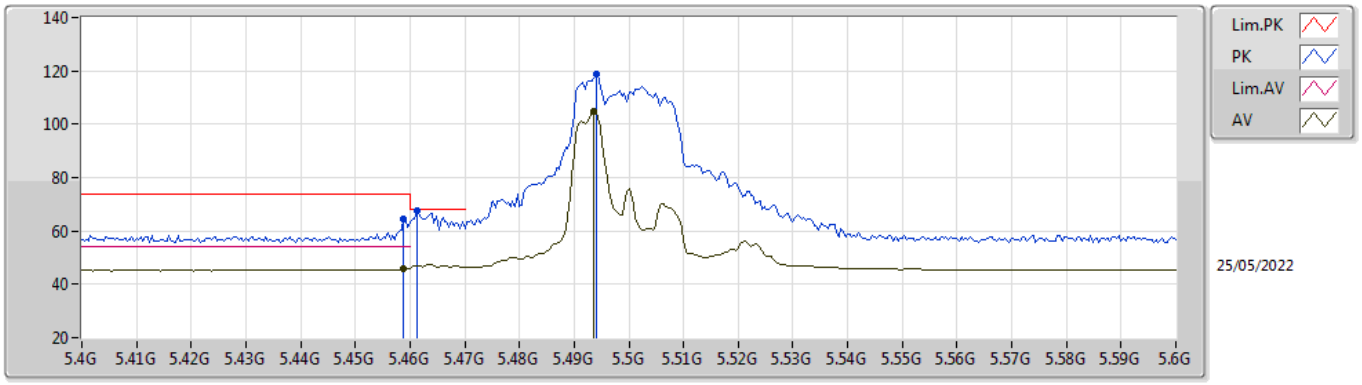


EUT X_2TX
Setting 18.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4588G	64.55	74.00	-9.45	58.12	3	Vertical	222	2.01	-	34.52	7.26	35.35
AV	5.4588G	45.98	54.00	-8.02	39.55	3	Vertical	222	2.01	-	34.52	7.26	35.35
PK	5.4612G	67.35	68.20	-0.85	60.92	3	Vertical	222	2.01	-	34.52	7.26	35.35
PK	5.494G	118.67	Inf	-Inf	112.14	3	Vertical	222	2.01	-	34.59	7.29	35.35
AV	5.4936G	104.94	Inf	-Inf	98.41	3	Vertical	222	2.01	-	34.59	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

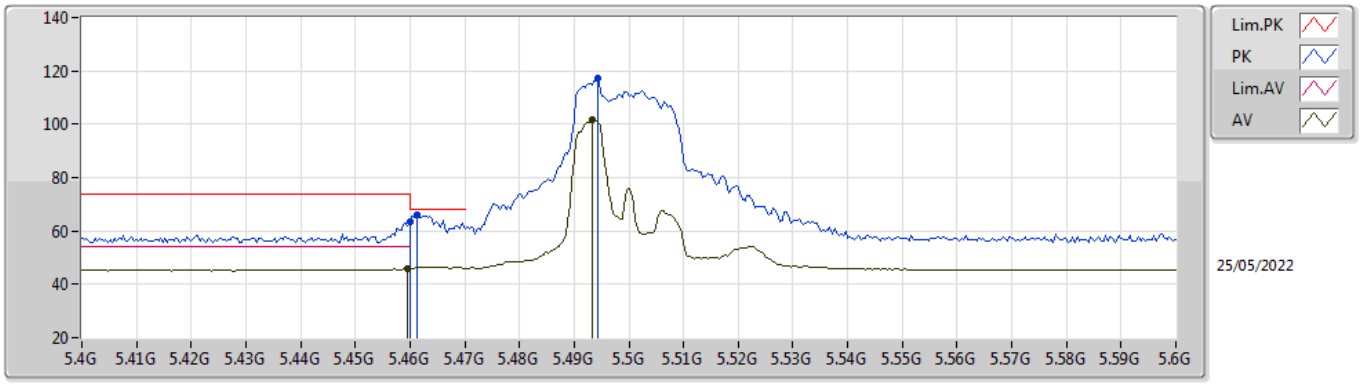


EUT X_2TX
Setting 18.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.46G	63.56	74.00	-10.44	57.13	3	Horizontal	200	1.80	-	34.52	7.26	35.35
AV	5.4596G	45.91	54.00	-8.09	39.48	3	Horizontal	200	1.80	-	34.52	7.26	35.35
PK	5.4612G	65.82	68.20	-2.38	59.39	3	Horizontal	200	1.80	-	34.52	7.26	35.35
PK	5.4944G	117.31	Inf	-Inf	110.78	3	Horizontal	200	1.80	-	34.59	7.29	35.35
AV	5.4932G	101.88	Inf	-Inf	95.35	3	Horizontal	200	1.80	-	34.59	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

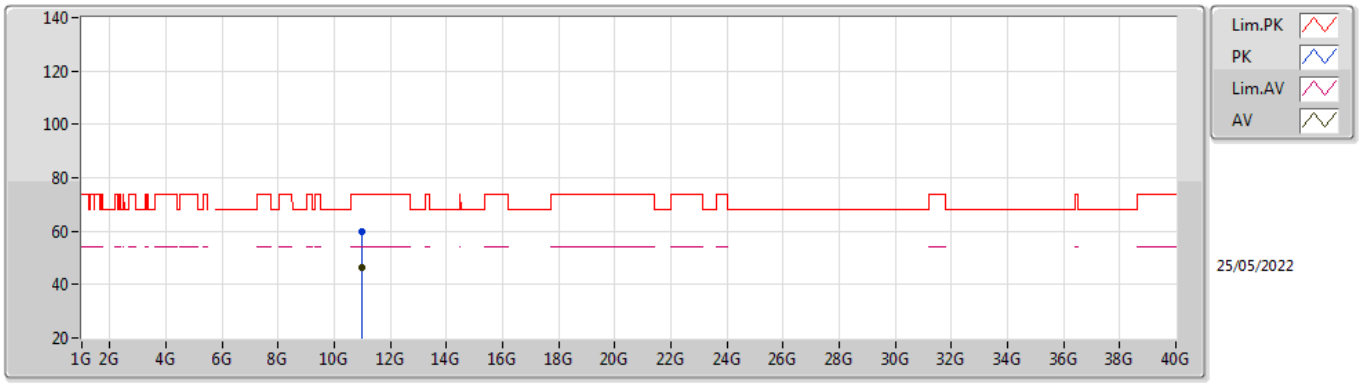


EUT X_2TX
Setting 18.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.999G	59.96	74.00	-14.04	45.95	3	Vertical	205	1.00	-	38.40	10.65	35.04
AV	10.9864G	46.61	54.00	-7.39	32.62	3	Vertical	205	1.00	-	38.39	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

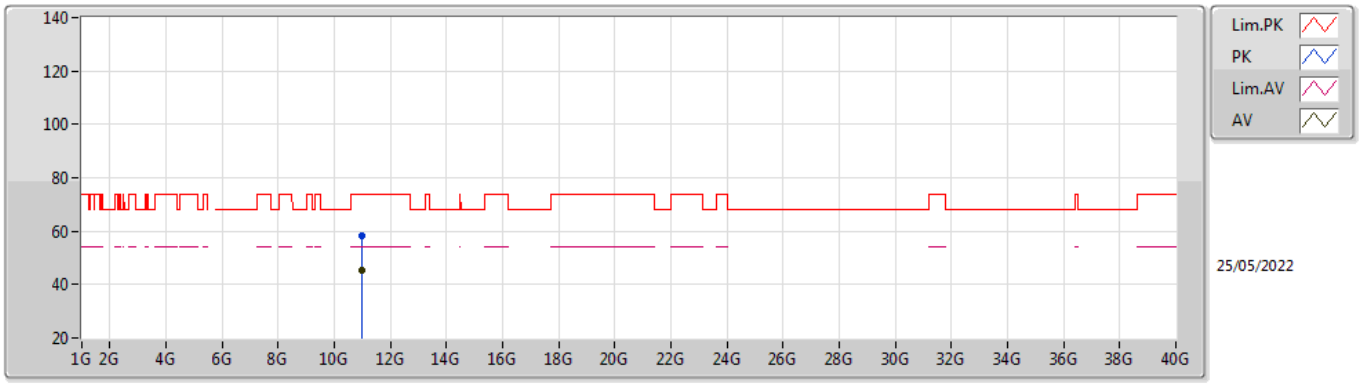


EUT X_2TX
Setting 18.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.986G	58.50	74.00	-15.50	44.51	3	Horizontal	58	1.56	-	38.39	10.65	35.05
AV	10.9864G	45.16	54.00	-8.84	31.17	3	Horizontal	58	1.56	-	38.39	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

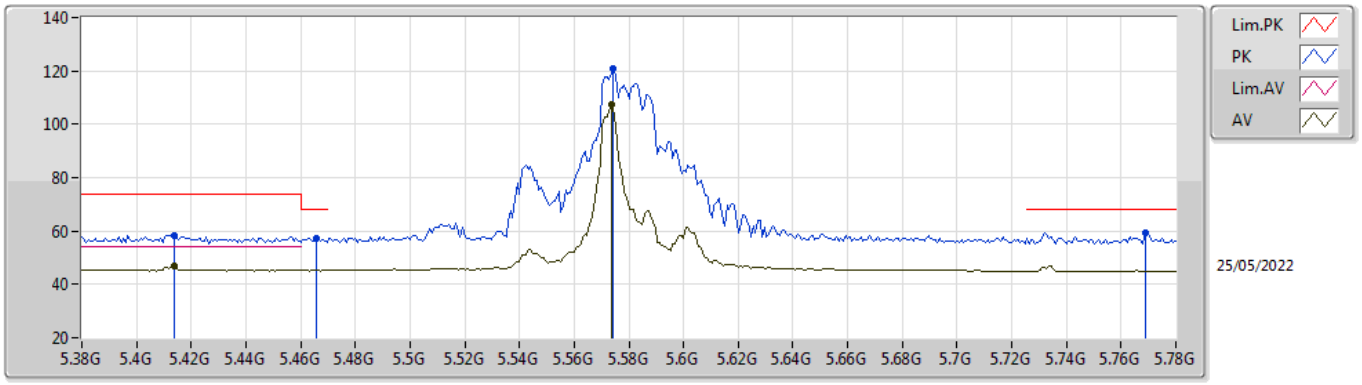


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4136G	58.48	74.00	-15.52	52.05	3	Vertical	220	1.80	-	34.57	7.21	35.35
AV	5.4136G	47.13	54.00	-6.87	40.70	3	Vertical	220	1.80	-	34.57	7.21	35.35
PK	5.4656G	57.32	68.20	-10.88	50.87	3	Vertical	220	1.80	-	34.53	7.27	35.35
PK	5.5744G	120.90	Inf	-Inf	114.32	3	Vertical	220	1.80	-	34.60	7.37	35.39
AV	5.5736G	107.54	Inf	-Inf	100.96	3	Vertical	220	1.80	-	34.60	7.37	35.39
PK	5.7688G	59.35	68.20	-8.85	53.23	3	Vertical	220	1.80	-	34.20	7.40	35.48

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

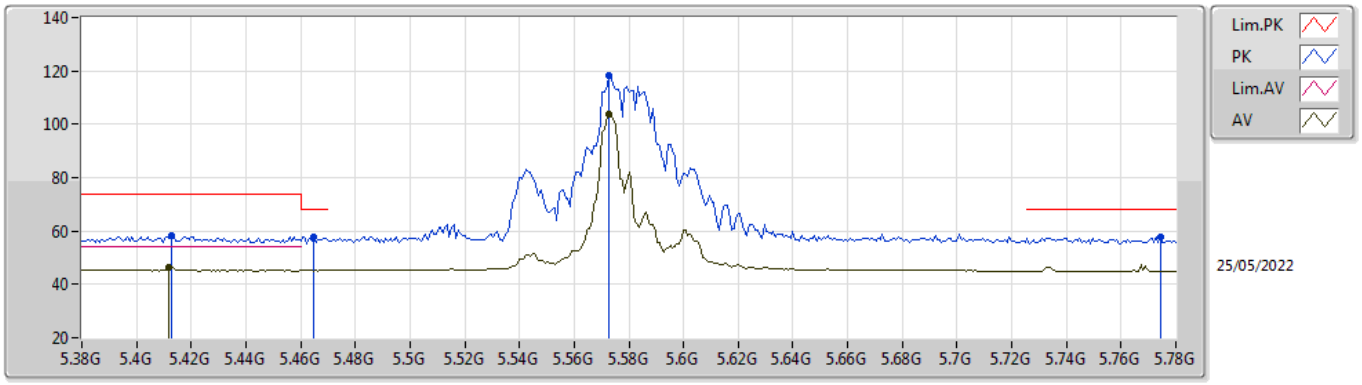


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4128G	58.16	74.00	-15.84	51.73	3	Horizontal	197	1.80	-	34.57	7.21	35.35
AV	5.412G	46.29	54.00	-7.71	39.85	3	Horizontal	197	1.80	-	34.58	7.21	35.35
PK	5.4648G	57.73	68.20	-10.47	51.29	3	Horizontal	197	1.80	-	34.53	7.26	35.35
PK	5.5728G	118.42	Inf	-Inf	111.84	3	Horizontal	197	1.80	-	34.60	7.37	35.39
AV	5.5728G	103.67	Inf	-Inf	97.09	3	Horizontal	197	1.80	-	34.60	7.37	35.39
PK	5.7744G	57.79	68.20	-10.41	51.68	3	Horizontal	197	1.80	-	34.20	7.40	35.49

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

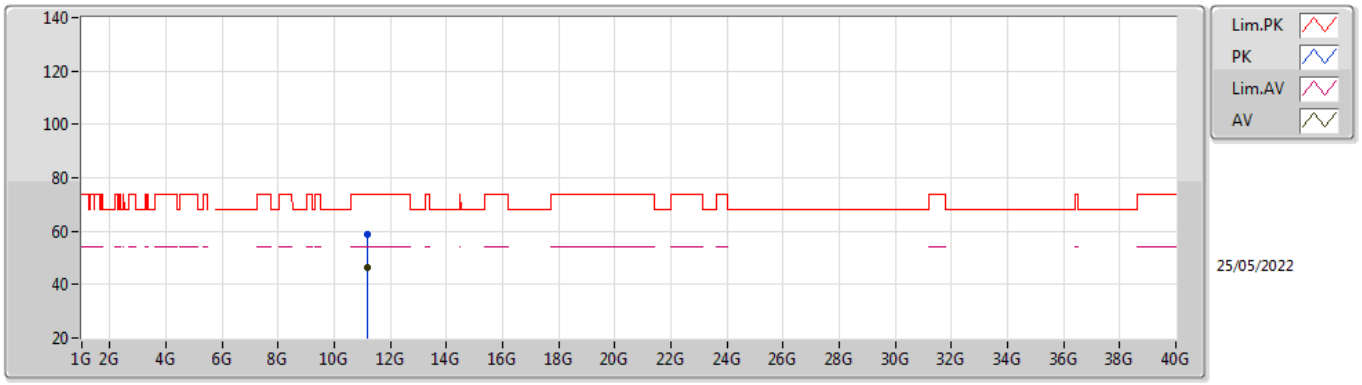


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.159G	58.98	74.00	-15.02	44.97	3	Vertical	328	1.80	-	38.56	10.67	35.22
AV	11.1746G	46.57	54.00	-7.43	32.56	3	Vertical	328	1.80	-	38.57	10.68	35.24

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

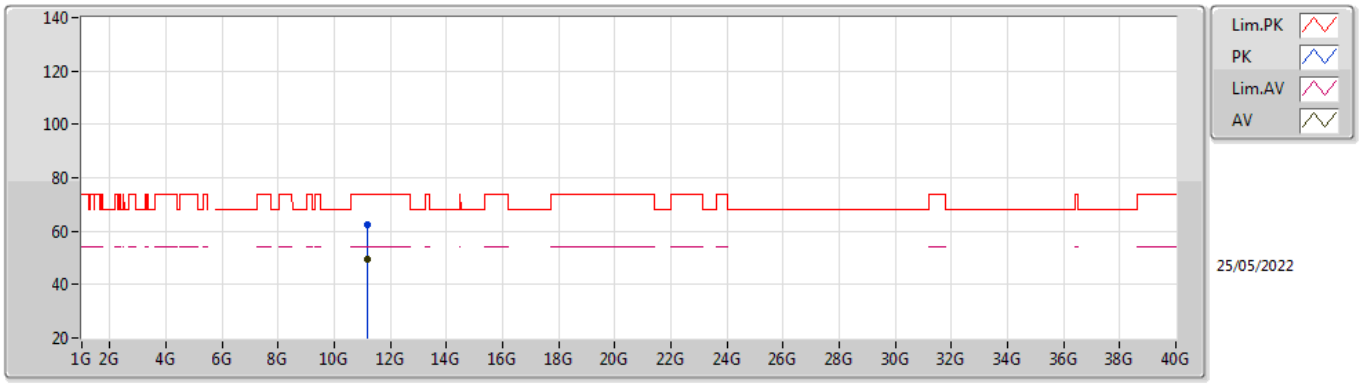


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.174G	62.18	74.00	-11.82	48.16	3	Horizontal	223	1.80	-	38.57	10.68	35.23
AV	11.174G	49.24	54.00	-4.76	35.22	3	Horizontal	223	1.80	-	38.57	10.68	35.23

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

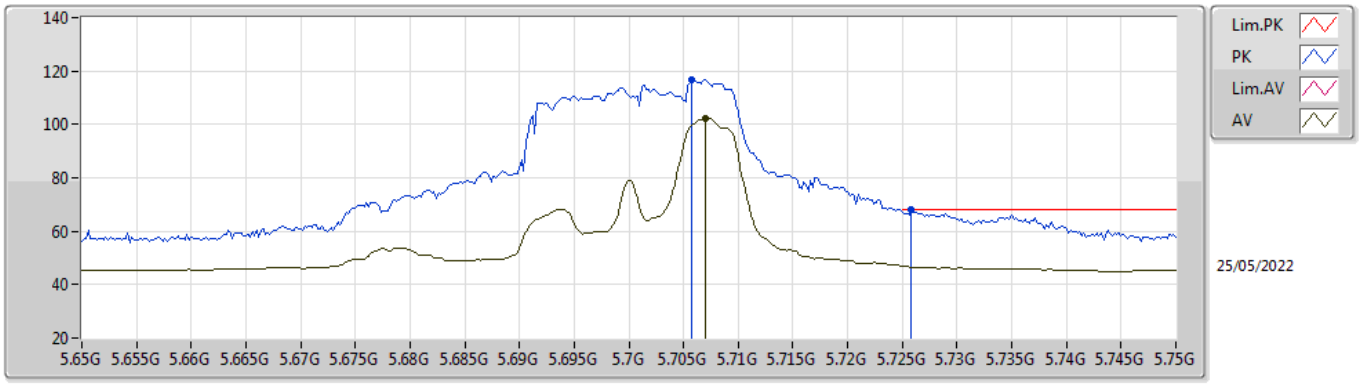


EUT X_2TX
Setting 17.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7058G	116.87	Inf	-Inf	110.63	3	Vertical	230	1.80	-	34.29	7.40	35.45
AV	5.707G	102.34	Inf	-Inf	96.10	3	Vertical	230	1.80	-	34.29	7.40	35.45
PK	5.7258G	68.14	68.20	-0.06	61.95	3	Vertical	230	1.80	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

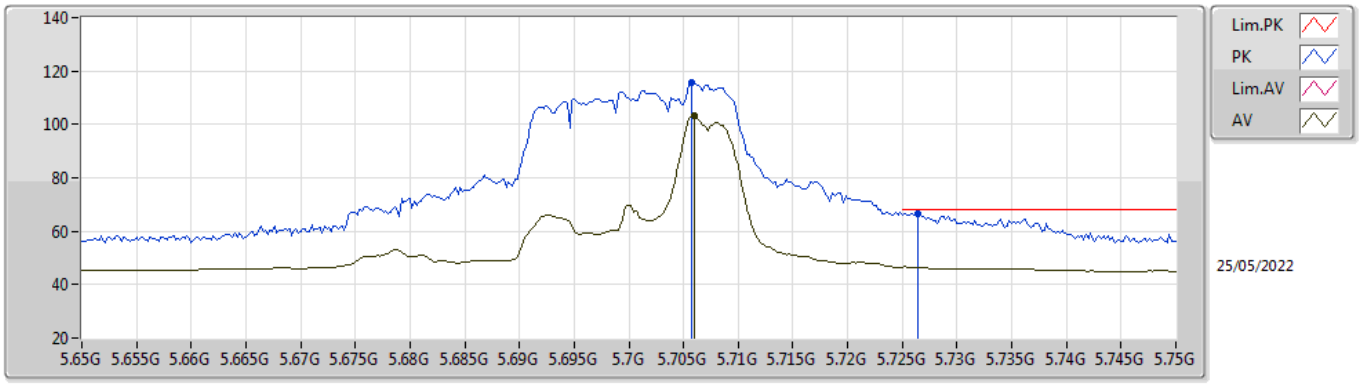


EUT X_2TX
Setting 17.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7058G	115.48	Inf	-Inf	109.24	3	Horizontal	202	1.80	-	34.29	7.40	35.45
AV	5.706G	103.23	Inf	-Inf	96.99	3	Horizontal	202	1.80	-	34.29	7.40	35.45
PK	5.7264G	66.64	68.20	-1.56	60.45	3	Horizontal	202	1.80	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

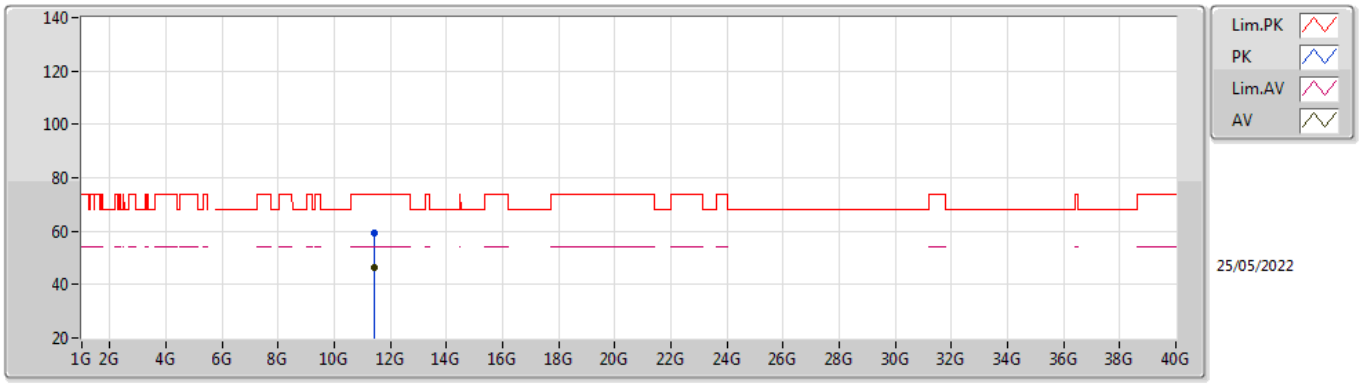


EUT X_2TX
Setting 17.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4138G	59.31	74.00	-14.69	45.27	3	Vertical	153	2.79	-	38.83	10.71	35.50
AV	11.4142G	46.33	54.00	-7.67	32.29	3	Vertical	153	2.79	-	38.83	10.71	35.50

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

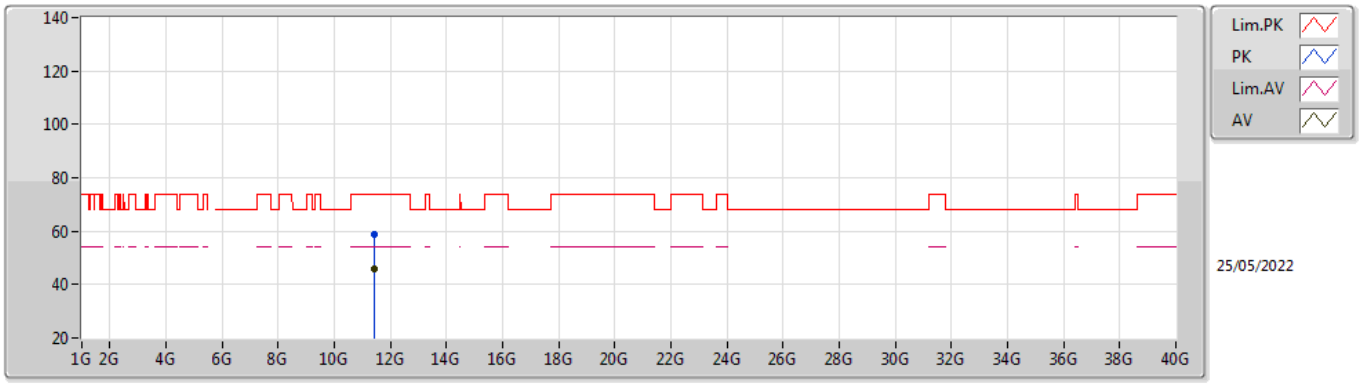


EUT X_2TX
Setting 17.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4148G	58.99	74.00	-15.01	44.95	3	Horizontal	319	2.99	-	38.83	10.71	35.50
AV	11.4152G	45.67	54.00	-8.33	31.64	3	Horizontal	319	2.99	-	38.83	10.71	35.51

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

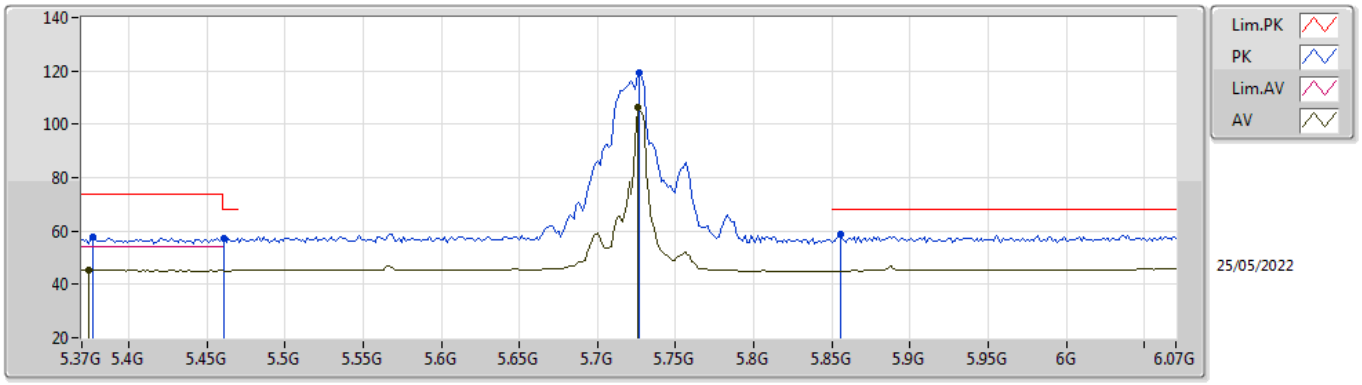


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.377G	57.59	74.00	-16.41	51.19	3	Vertical	226	1.86	-	34.55	7.20	35.35
AV	5.3742G	45.25	54.00	-8.75	38.84	3	Vertical	226	1.86	-	34.55	7.20	35.34
PK	5.461G	57.42	68.20	-10.78	50.99	3	Vertical	226	1.86	-	34.52	7.26	35.35
PK	5.727G	119.34	Inf	-Inf	113.15	3	Vertical	226	1.86	-	34.25	7.40	35.46
AV	5.7256G	106.60	Inf	-Inf	100.41	3	Vertical	226	1.86	-	34.25	7.40	35.46
PK	5.8558G	58.64	68.20	-9.56	52.38	3	Vertical	226	1.86	-	34.33	7.46	35.53

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

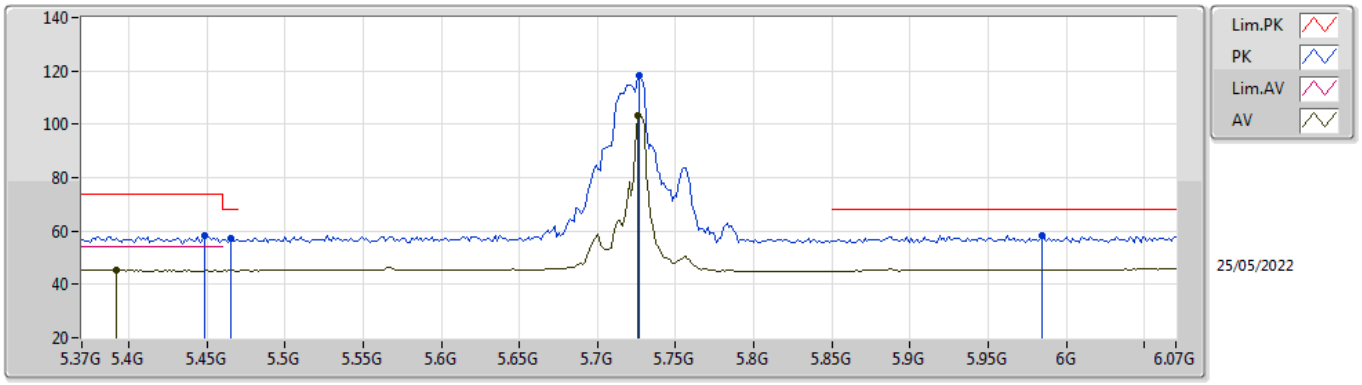


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4484G	58.45	74.00	-15.55	52.05	3	Horizontal	201	1.80	-	34.50	7.25	35.35
AV	5.3924G	45.25	54.00	-8.75	38.82	3	Horizontal	201	1.80	-	34.58	7.20	35.35
PK	5.4652G	57.32	68.20	-10.88	50.87	3	Horizontal	201	1.80	-	34.53	7.27	35.35
PK	5.727G	118.04	Inf	-Inf	111.85	3	Horizontal	201	1.80	-	34.25	7.40	35.46
AV	5.7256G	103.23	Inf	-Inf	97.04	3	Horizontal	201	1.80	-	34.25	7.40	35.46
PK	5.9846G	58.53	68.20	-9.67	51.74	3	Horizontal	201	1.80	-	34.80	7.58	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

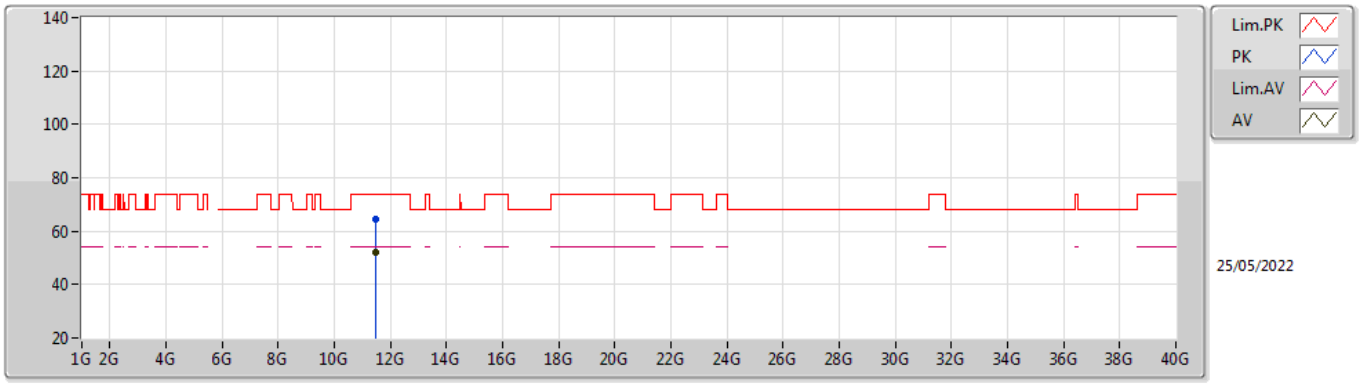


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4546G	64.40	74.00	-9.60	50.32	3	Vertical	173	2.78	-	38.91	10.72	35.55
AV	11.4546G	51.84	54.00	-2.16	37.76	3	Vertical	173	2.78	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

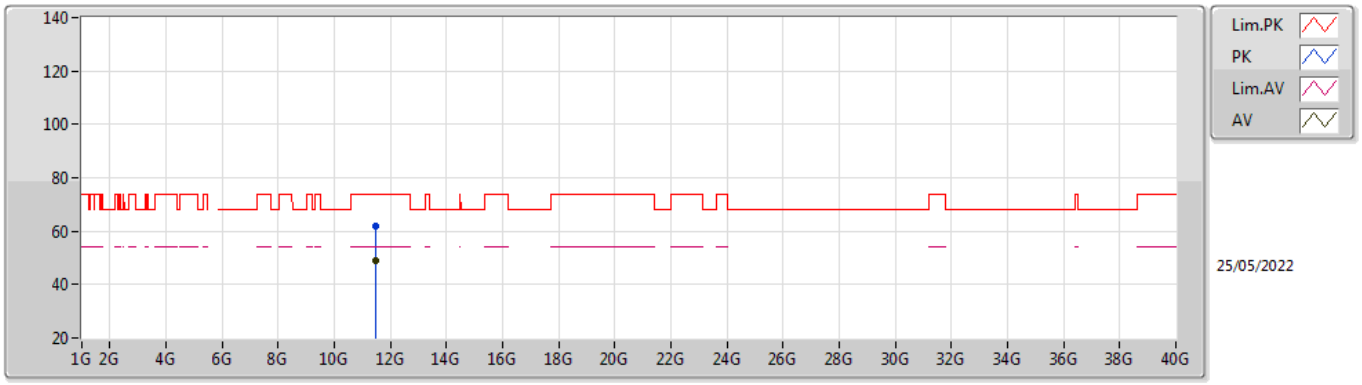


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4556G	62.10	74.00	-11.90	48.02	3	Horizontal	196	1.80	-	38.91	10.72	35.55
AV	11.4554G	49.02	54.00	-4.98	34.94	3	Horizontal	196	1.80	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

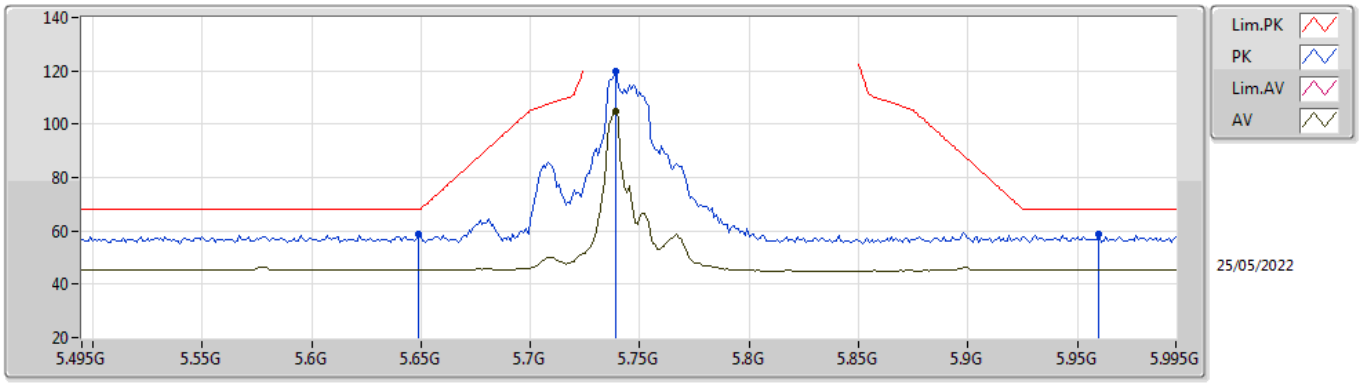


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.649G	58.88	68.20	-9.32	52.40	3	Vertical	219	1.67	-	34.50	7.40	35.42
PK	5.739G	119.72	Inf	-Inf	113.57	3	Vertical	219	1.67	-	34.22	7.40	35.47
AV	5.739G	104.88	Inf	-Inf	98.73	3	Vertical	219	1.67	-	34.22	7.40	35.47
PK	5.96G	58.59	68.20	-9.61	51.81	3	Vertical	219	1.67	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

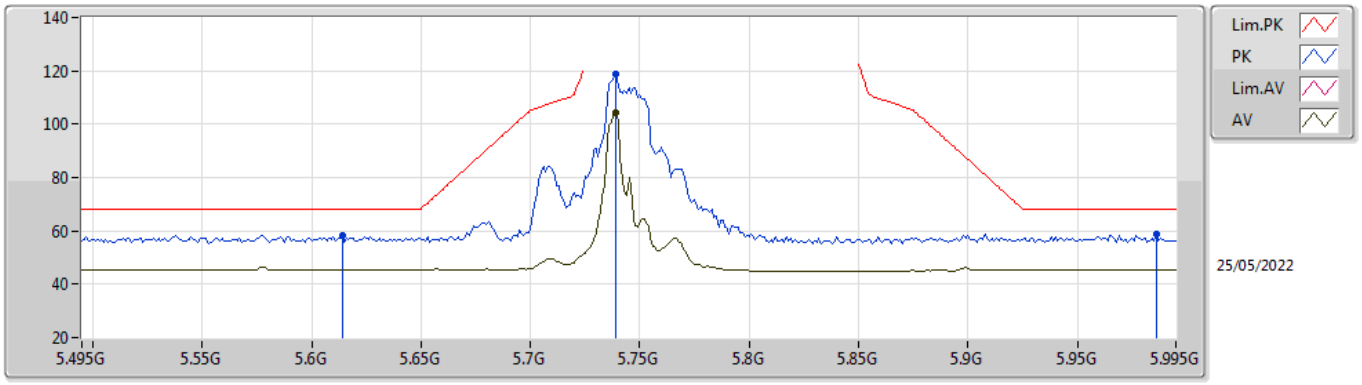


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.614G	58.21	68.20	-9.99	51.65	3	Horizontal	198	1.80	-	34.57	7.40	35.41
PK	5.739G	118.56	Inf	-Inf	112.41	3	Horizontal	198	1.80	-	34.22	7.40	35.47
AV	5.739G	104.07	Inf	-Inf	97.92	3	Horizontal	198	1.80	-	34.22	7.40	35.47
PK	5.986G	58.62	68.20	-9.58	51.82	3	Horizontal	198	1.80	-	34.80	7.59	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

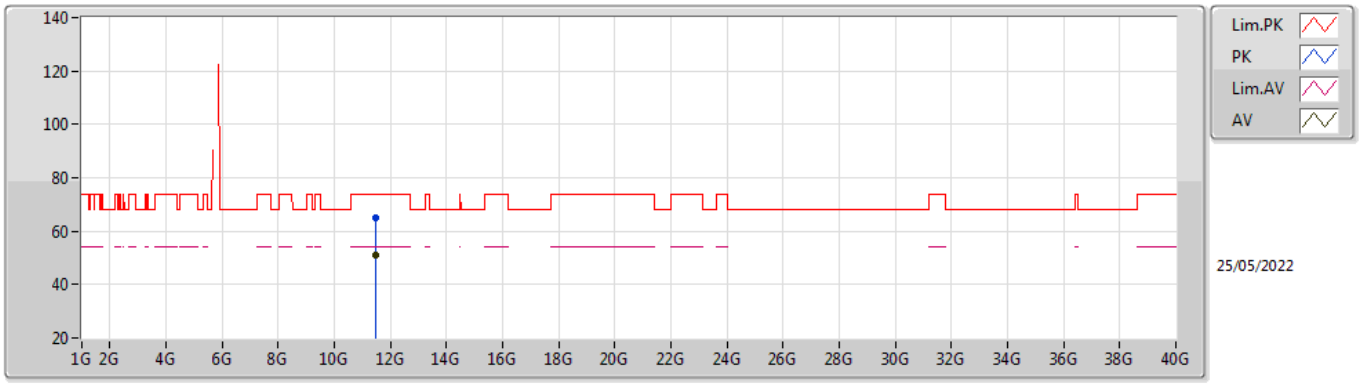


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4746G	64.91	74.00	-9.09	50.81	3	Vertical	173	2.76	-	38.95	10.72	35.57
AV	11.4748G	51.28	54.00	-2.72	37.18	3	Vertical	173	2.76	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

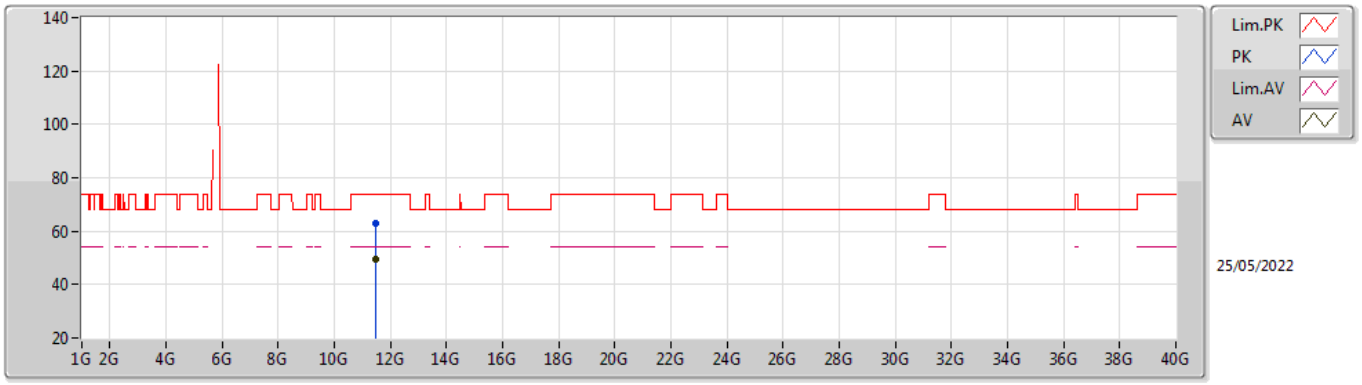


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4756G	62.70	74.00	-11.30	48.60	3	Horizontal	196	1.80	-	38.95	10.72	35.57
AV	11.4756G	49.60	54.00	-4.40	35.50	3	Horizontal	196	1.80	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

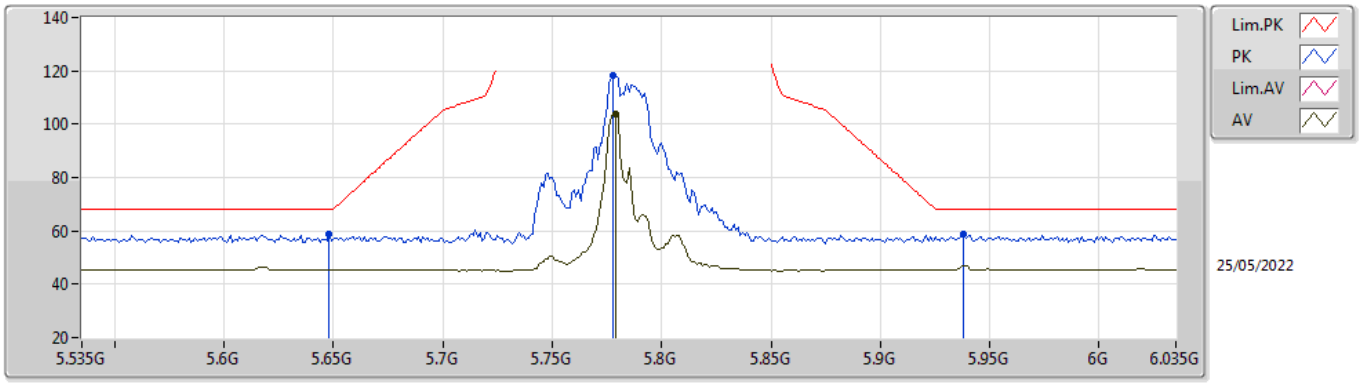


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.648G	58.62	68.20	-9.58	52.14	3	Vertical	225	1.80	-	34.50	7.40	35.42
PK	5.778G	118.34	Inf	-Inf	112.23	3	Vertical	225	1.80	-	34.20	7.40	35.49
AV	5.779G	103.99	Inf	-Inf	97.88	3	Vertical	225	1.80	-	34.20	7.40	35.49
PK	5.938G	58.58	68.20	-9.62	51.86	3	Vertical	225	1.80	-	34.75	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

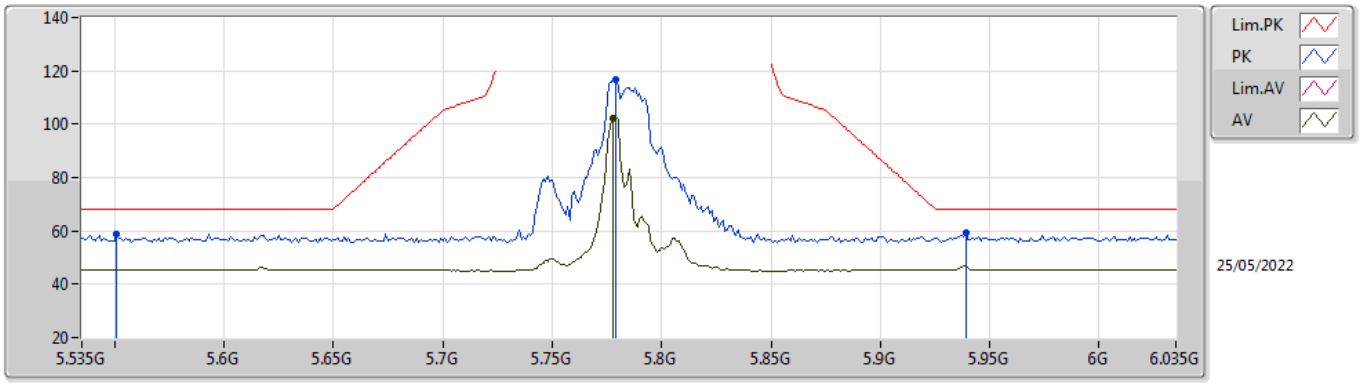


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.551G	58.95	68.20	-9.25	52.38	3	Horizontal	184	1.80	-	34.60	7.35	35.38
PK	5.779G	116.80	Inf	-Inf	110.69	3	Horizontal	184	1.80	-	34.20	7.40	35.49
AV	5.778G	102.29	Inf	-Inf	96.18	3	Horizontal	184	1.80	-	34.20	7.40	35.49
PK	5.939G	59.16	68.20	-9.04	52.43	3	Horizontal	184	1.80	-	34.76	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

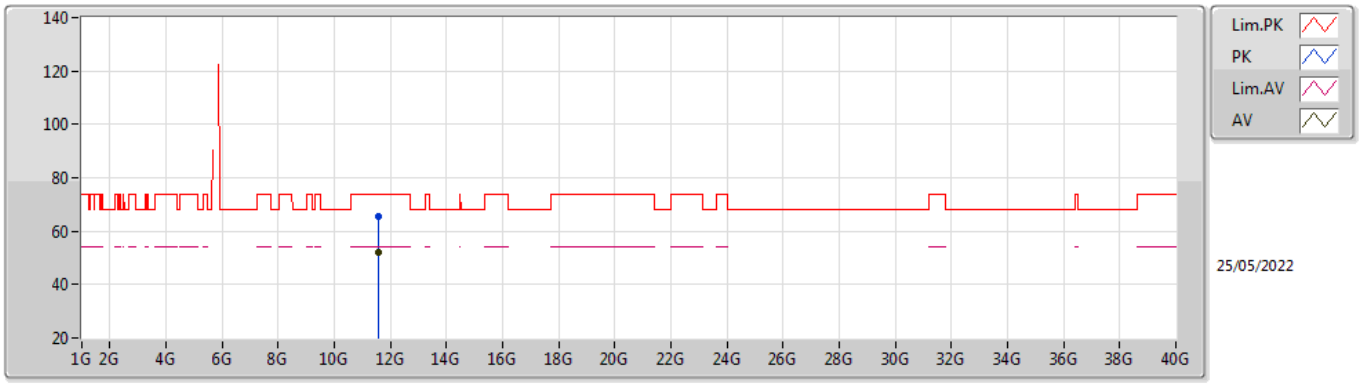


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5546G	65.27	74.00	-8.73	50.91	3	Vertical	176	2.80	-	39.22	10.73	35.59
AV	11.5564G	51.92	54.00	-2.08	37.55	3	Vertical	176	2.80	-	39.23	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

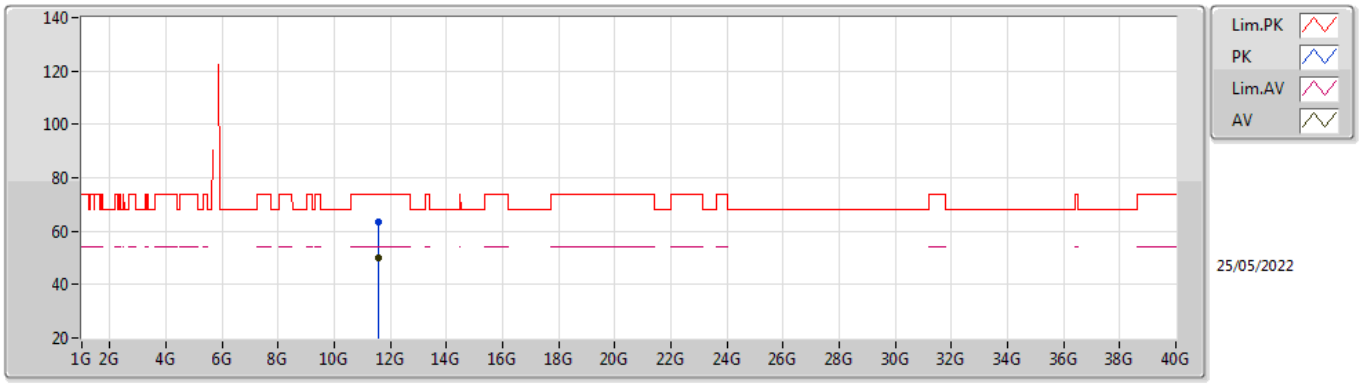


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5556G	63.67	74.00	-10.33	49.31	3	Horizontal	197	1.80	-	39.22	10.73	35.59
AV	11.5556G	49.97	54.00	-4.03	35.61	3	Horizontal	197	1.80	-	39.22	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

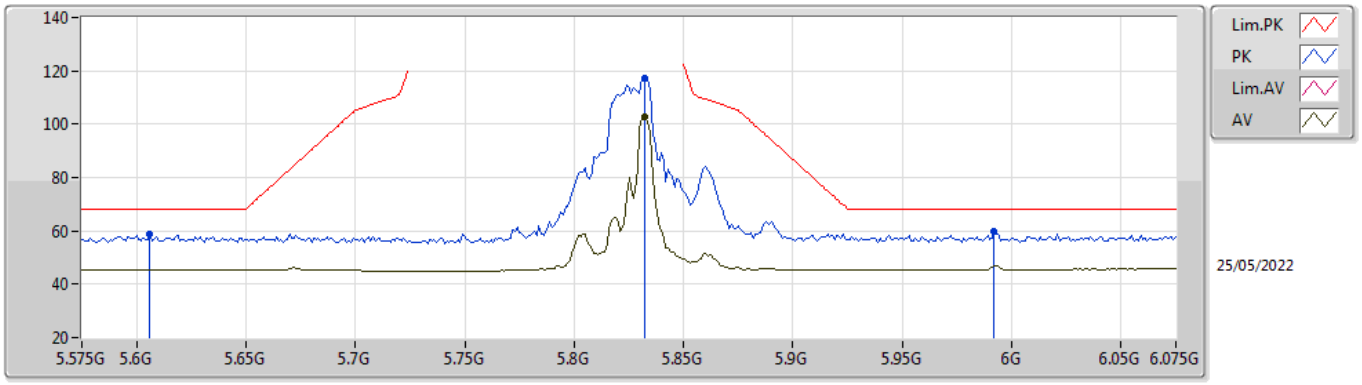


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.606G	58.84	68.20	-9.36	52.25	3	Vertical	228	1.80	-	34.59	7.40	35.40
PK	5.832G	117.32	Inf	-Inf	111.15	3	Vertical	228	1.80	-	34.26	7.43	35.52
AV	5.832G	102.95	Inf	-Inf	96.78	3	Vertical	228	1.80	-	34.26	7.43	35.52
PK	5.992G	59.57	68.20	-8.63	52.78	3	Vertical	228	1.80	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

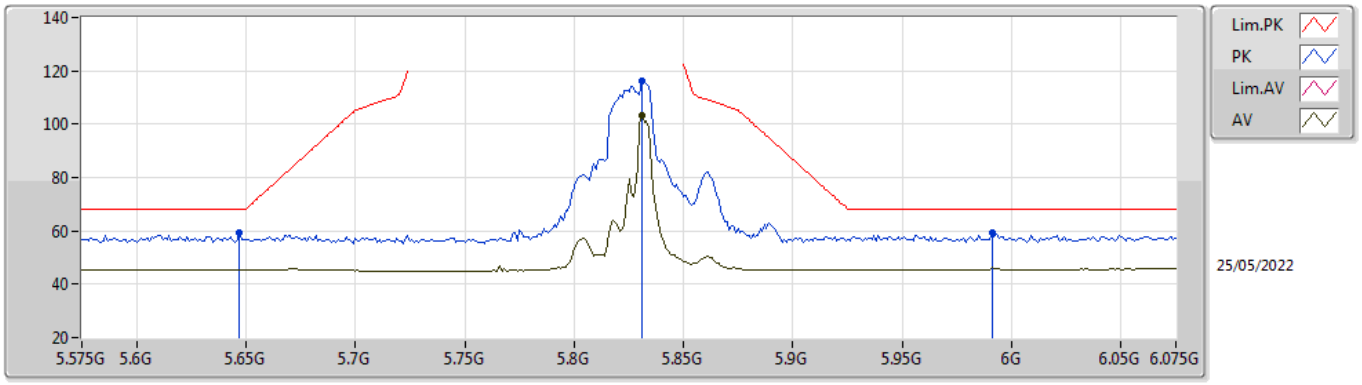


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.647G	59.08	68.20	-9.12	52.59	3	Horizontal	178	1.80	-	34.51	7.40	35.42
PK	5.831G	116.21	Inf	-Inf	110.04	3	Horizontal	178	1.80	-	34.26	7.43	35.52
AV	5.831G	103.16	Inf	-Inf	96.99	3	Horizontal	178	1.80	-	34.26	7.43	35.52
PK	5.991G	59.47	68.20	-8.73	52.68	3	Horizontal	178	1.80	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

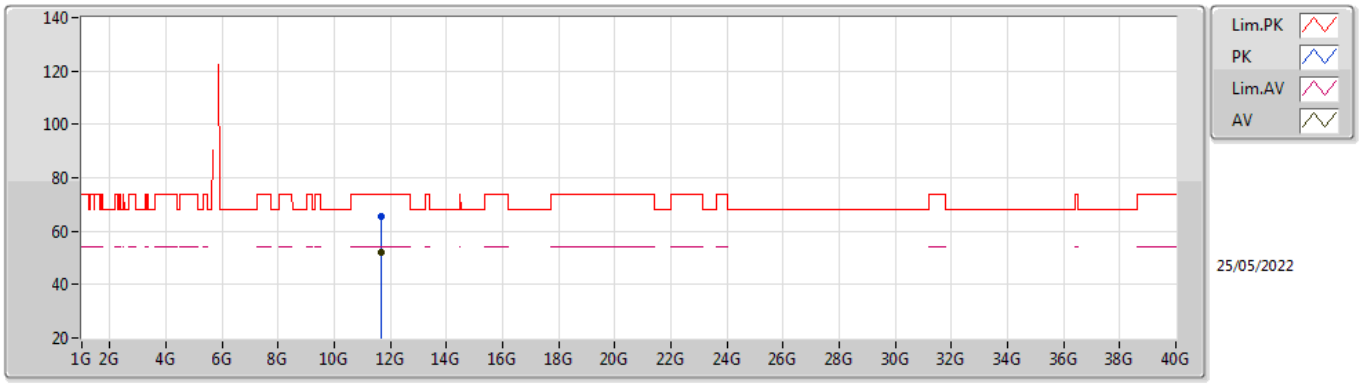


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6646G	65.65	74.00	-8.35	51.06	3	Vertical	176	2.76	-	39.40	10.75	35.56
AV	11.6646G	52.28	54.00	-1.72	37.69	3	Vertical	176	2.76	-	39.40	10.75	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

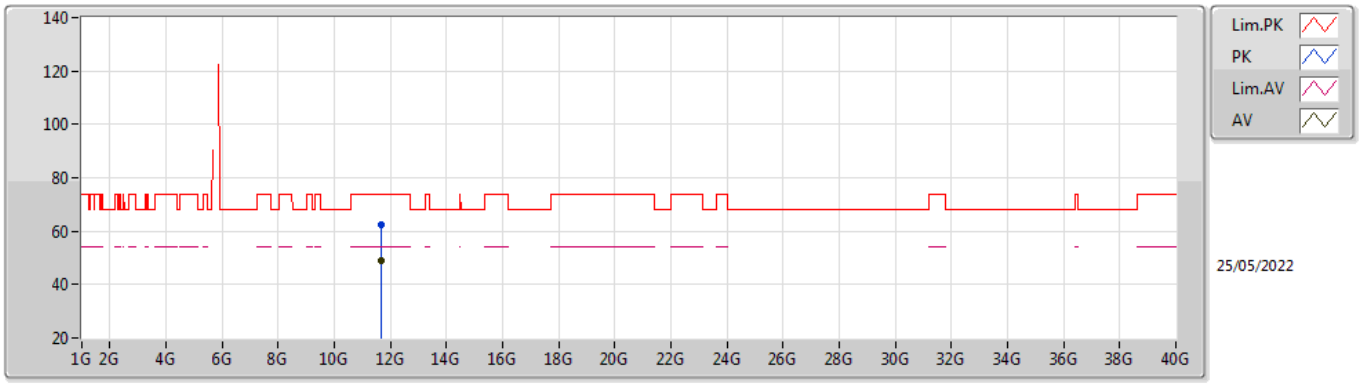

EUT X_2TX
Setting 21.5
03-B-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6654G	62.28	74.00	-11.72	47.69	3	Horizontal	199	1.80	-	39.40	10.75	35.56
AV	11.6652G	49.02	54.00	-4.98	34.43	3	Horizontal	199	1.80	-	39.40	10.75	35.56

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.25-5.35GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	PK	5.3502G	73.50	74.00	-0.50	3	Vertical	215	1.80	-

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

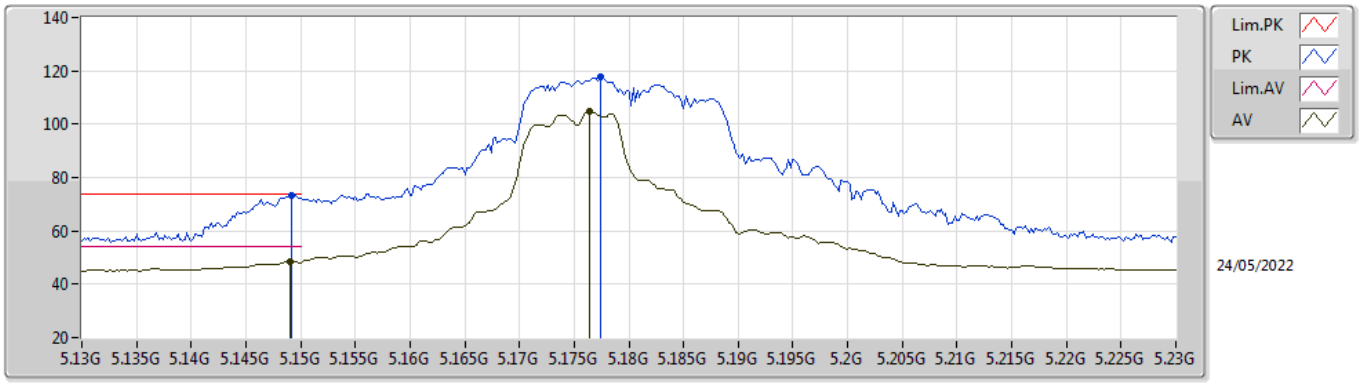


EUT X_2TX
Setting 18.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1492G	73.12	74.00	-0.88	67.29	3	Vertical	219	1.80	-	34.00	7.17	35.34
AV	5.149G	48.64	54.00	-5.36	42.81	3	Vertical	219	1.80	-	34.00	7.17	35.34
PK	5.1774G	117.54	Inf	-Inf	111.58	3	Vertical	219	1.80	-	34.11	7.19	35.34
AV	5.1764G	104.98	Inf	-Inf	99.02	3	Vertical	219	1.80	-	34.11	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

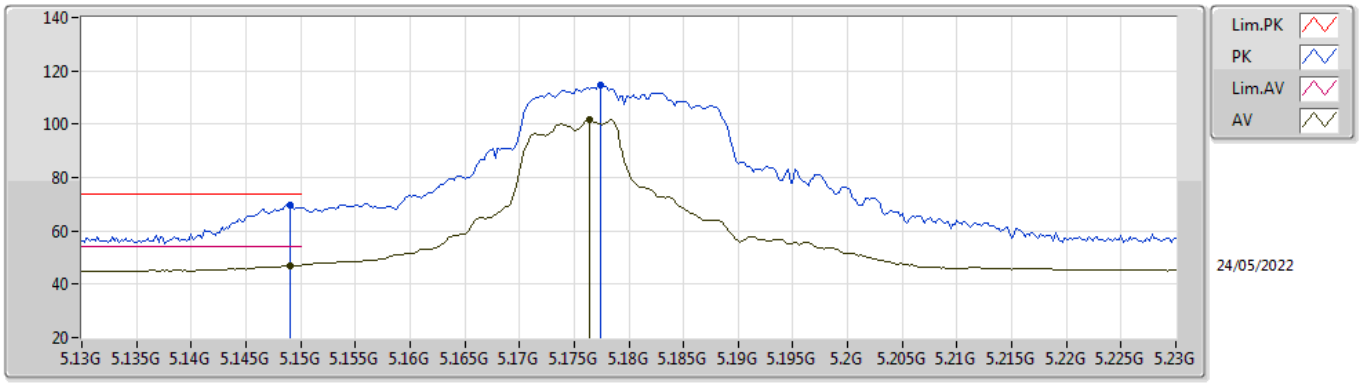


EUT X_2TX
Setting 18.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.149G	69.75	74.00	-4.25	63.92	3	Horizontal	223	1.80	-	34.00	7.17	35.34
AV	5.149G	47.06	54.00	-6.94	41.23	3	Horizontal	223	1.80	-	34.00	7.17	35.34
PK	5.1774G	114.91	Inf	-Inf	108.95	3	Horizontal	223	1.80	-	34.11	7.19	35.34
AV	5.1764G	101.70	Inf	-Inf	95.74	3	Horizontal	223	1.80	-	34.11	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

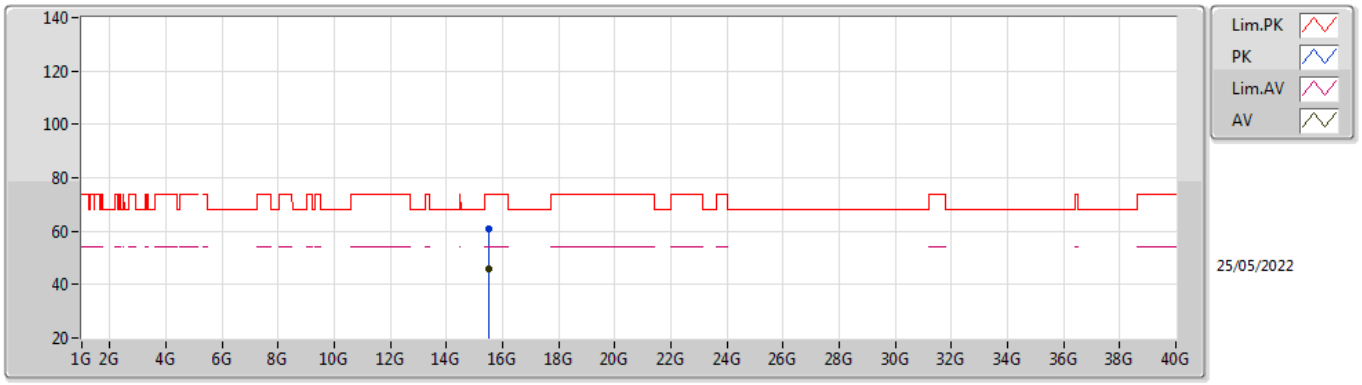


EUT X_2TX
Setting 18.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.52824G	60.78	74.00	-13.22	44.51	3	Vertical	187	2.62	-	38.50	13.16	35.39
AV	15.52752G	46.03	54.00	-7.97	29.75	3	Vertical	187	2.62	-	38.51	13.16	35.39

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

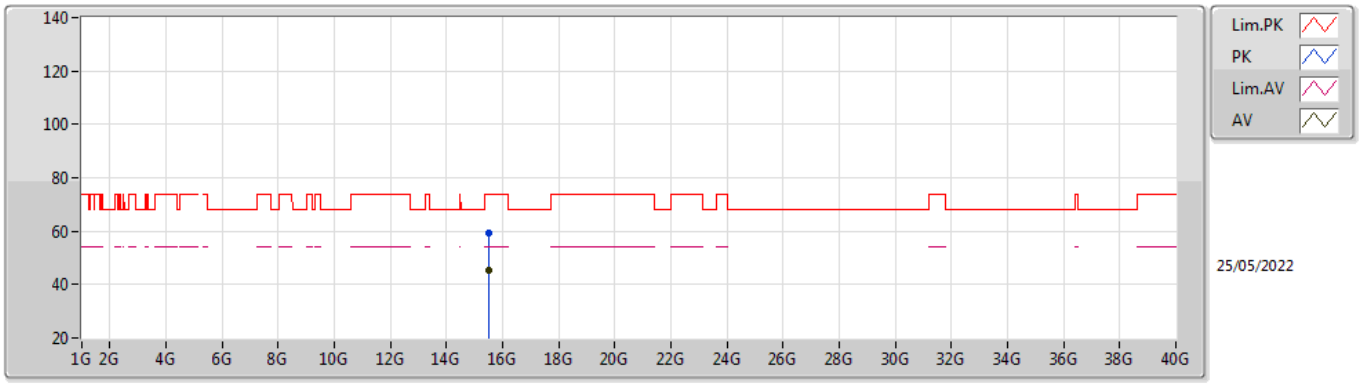


EUT X_2TX
Setting 18.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.52836G	59.36	74.00	-14.64	43.09	3	Horizontal	268	1.80	-	38.50	13.16	35.39
AV	15.52788G	45.19	54.00	-8.81	28.92	3	Horizontal	268	1.80	-	38.50	13.16	35.39

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

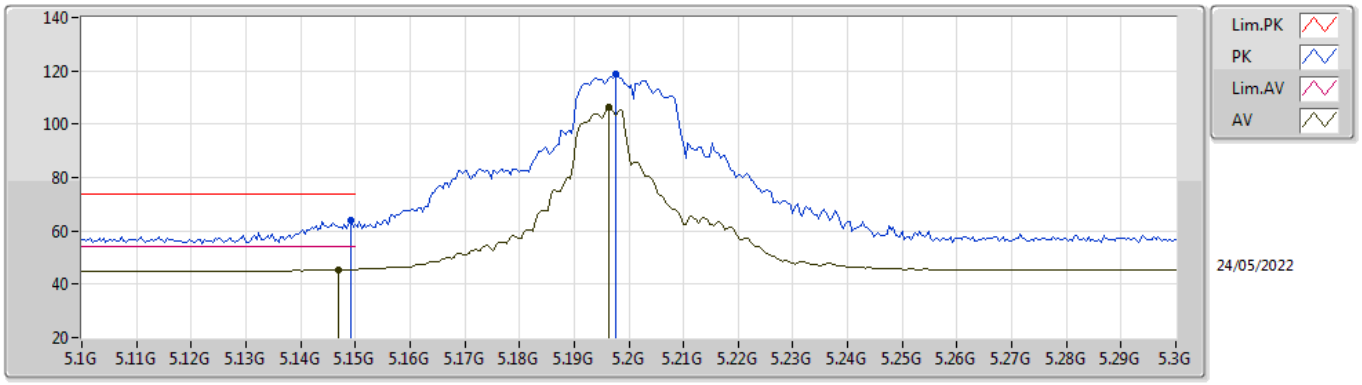


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1492G	63.83	74.00	-10.17	58.00	3	Vertical	219	1.77	-	34.00	7.17	35.34
AV	5.1468G	45.57	54.00	-8.43	39.75	3	Vertical	219	1.77	-	33.99	7.17	35.34
PK	5.1976G	118.64	Inf	-Inf	112.59	3	Vertical	219	1.77	-	34.19	7.20	35.34
AV	5.1964G	106.31	Inf	-Inf	100.26	3	Vertical	219	1.77	-	34.19	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

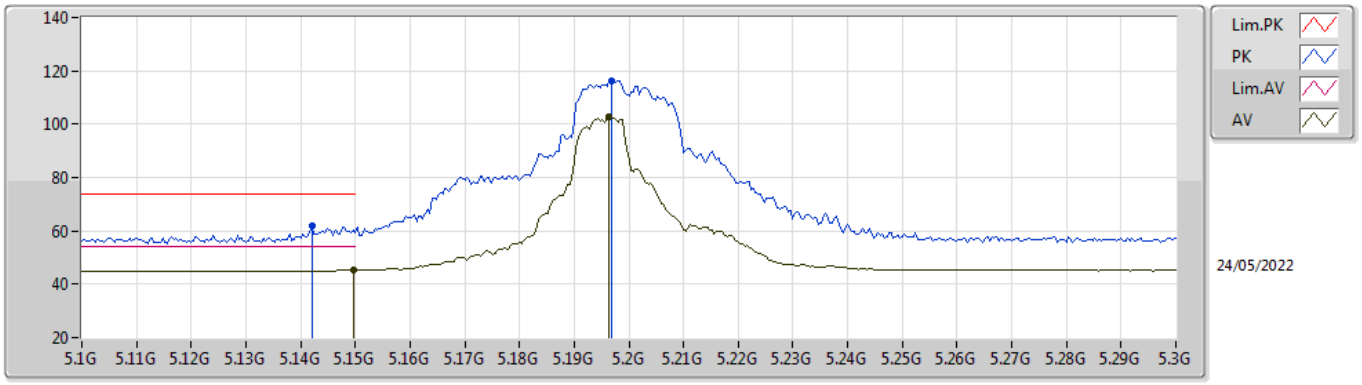


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.142G	61.64	74.00	-12.36	55.83	3	Horizontal	219	1.74	-	33.98	7.17	35.34
AV	5.1496G	45.27	54.00	-8.73	39.44	3	Horizontal	219	1.74	-	34.00	7.17	35.34
PK	5.1968G	116.44	Inf	-Inf	110.39	3	Horizontal	219	1.74	-	34.19	7.20	35.34
AV	5.1964G	102.89	Inf	-Inf	96.84	3	Horizontal	219	1.74	-	34.19	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

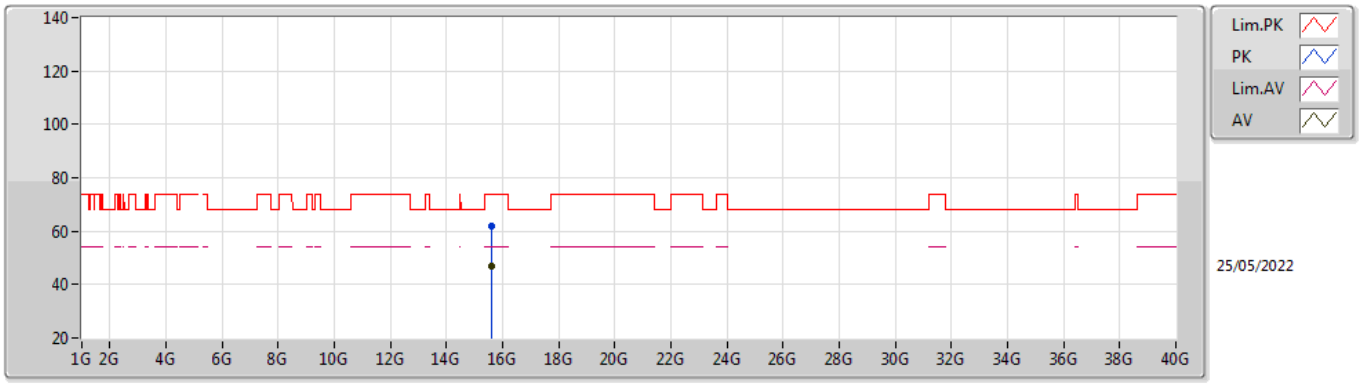


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.58872G	61.66	74.00	-12.34	45.83	3	Vertical	155	2.07	-	38.08	13.19	35.44
AV	15.5877G	47.05	54.00	-6.95	31.21	3	Vertical	155	2.07	-	38.09	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

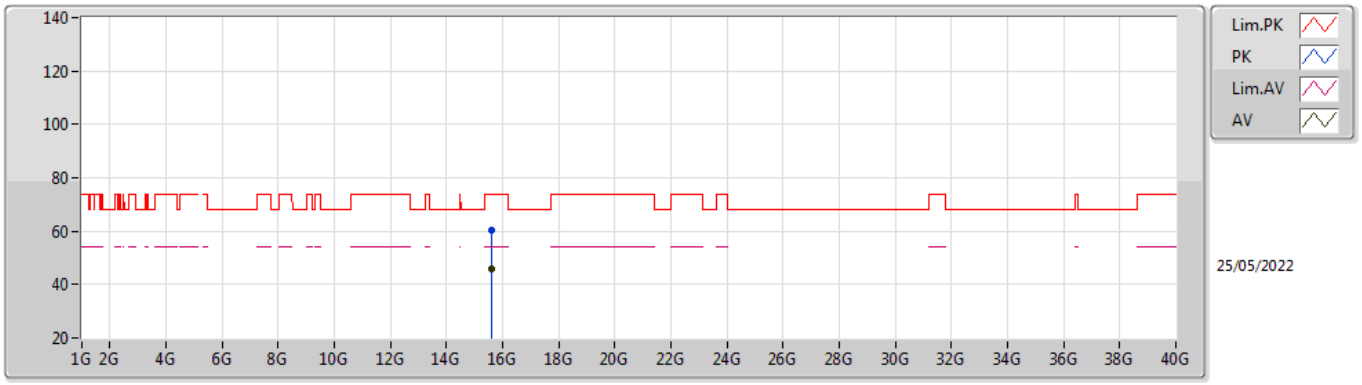


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.58872G	60.51	74.00	-13.49	44.68	3	Horizontal	280	1.80	-	38.08	13.19	35.44
AV	15.58704G	45.73	54.00	-8.27	29.89	3	Horizontal	280	1.80	-	38.09	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

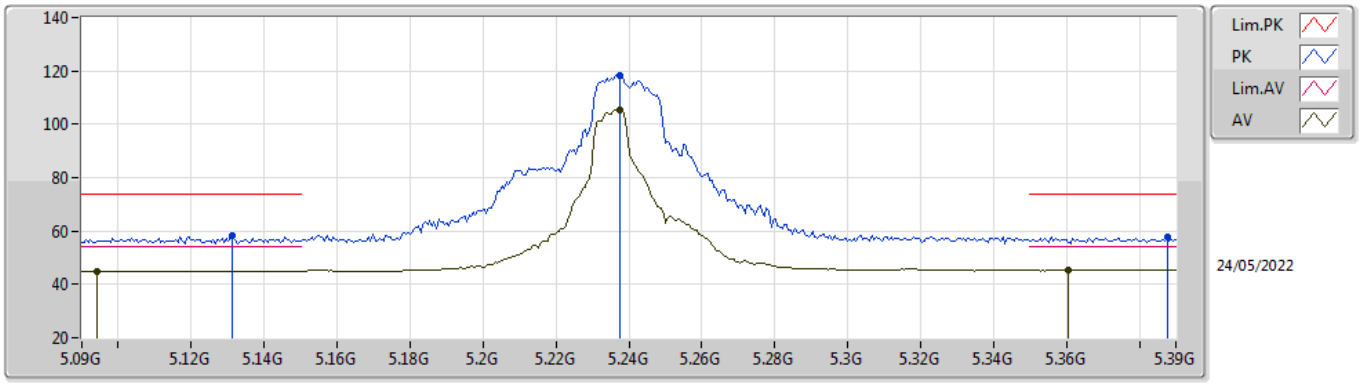


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1314G	58.16	74.00	-15.84	52.37	3	Vertical	217	1.56	-	33.96	7.17	35.34
AV	5.0942G	44.95	54.00	-9.05	39.24	3	Vertical	217	1.56	-	33.89	7.15	35.33
PK	5.2376G	118.30	Inf	-Inf	112.09	3	Vertical	217	1.56	-	34.35	7.20	35.34
AV	5.2376G	105.37	Inf	-Inf	99.16	3	Vertical	217	1.56	-	34.35	7.20	35.34
PK	5.3876G	57.79	74.00	-16.21	51.36	3	Vertical	217	1.56	-	34.58	7.20	35.35
AV	5.3606G	45.39	54.00	-8.61	39.01	3	Vertical	217	1.56	-	34.52	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

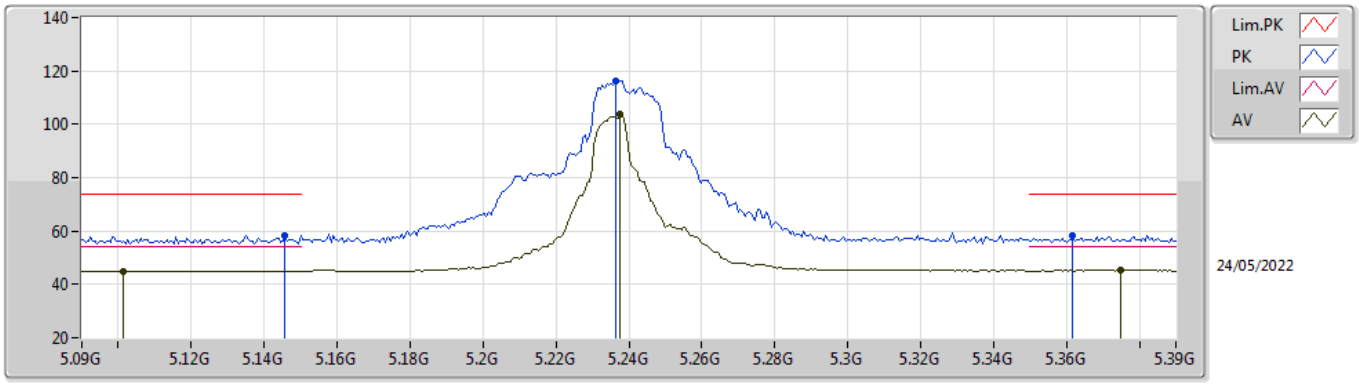


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1458G	58.26	74.00	-15.74	52.44	3	Horizontal	218	1.09	-	33.99	7.17	35.34
AV	5.1014G	44.91	54.00	-9.09	39.19	3	Horizontal	218	1.09	-	33.90	7.15	35.33
PK	5.2364G	116.41	Inf	-Inf	110.20	3	Horizontal	218	1.09	-	34.35	7.20	35.34
AV	5.2376G	103.91	Inf	-Inf	97.70	3	Horizontal	218	1.09	-	34.35	7.20	35.34
PK	5.3618G	58.15	74.00	-15.85	51.77	3	Horizontal	218	1.09	-	34.52	7.20	35.34
AV	5.375G	45.29	54.00	-8.71	38.88	3	Horizontal	218	1.09	-	34.55	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

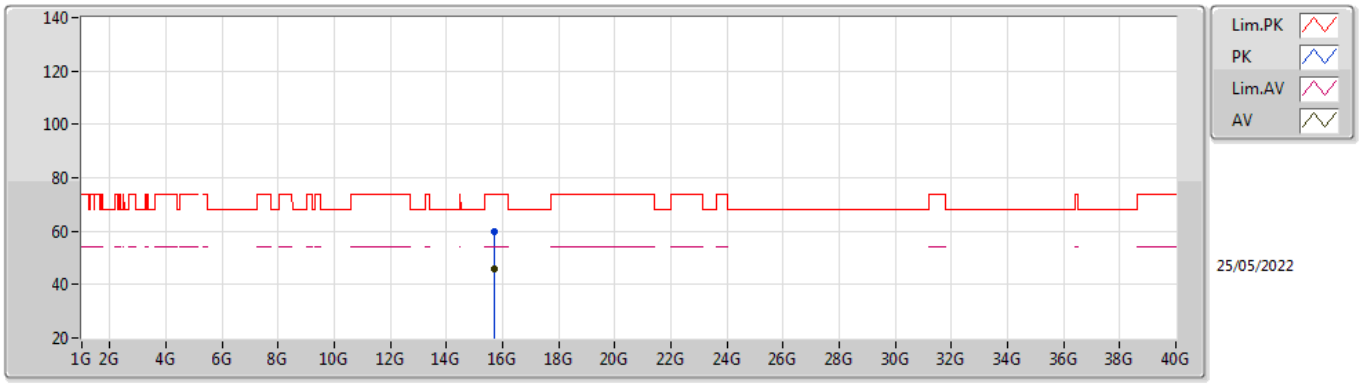


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.70884G	59.78	74.00	-14.22	44.54	3	Vertical	155	2.06	-	37.54	13.25	35.55
AV	15.7077G	46.01	54.00	-7.99	30.77	3	Vertical	155	2.06	-	37.53	13.25	35.54

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

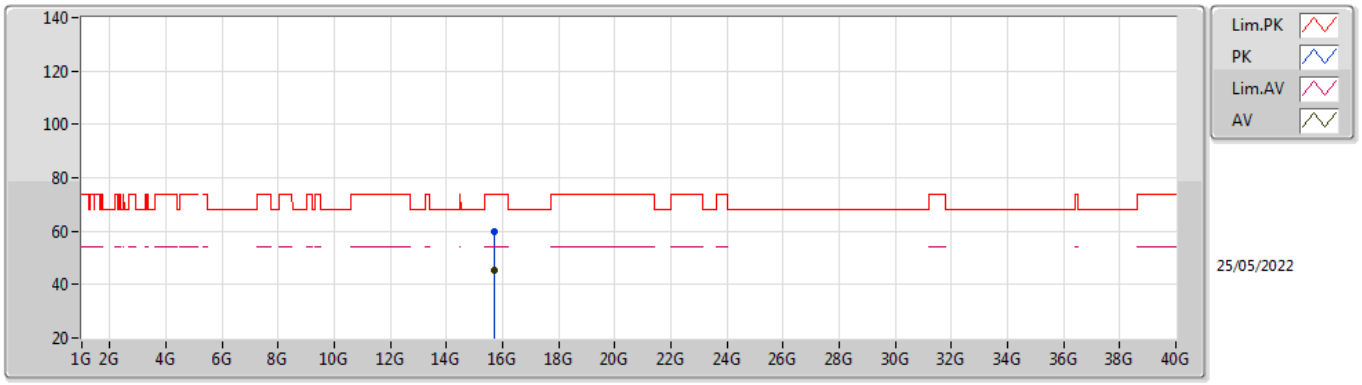


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.70824G	59.70	74.00	-14.30	44.46	3	Horizontal	228	1.80	-	37.53	13.25	35.54
AV	15.70944G	45.23	54.00	-8.77	29.99	3	Horizontal	228	1.80	-	37.54	13.25	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

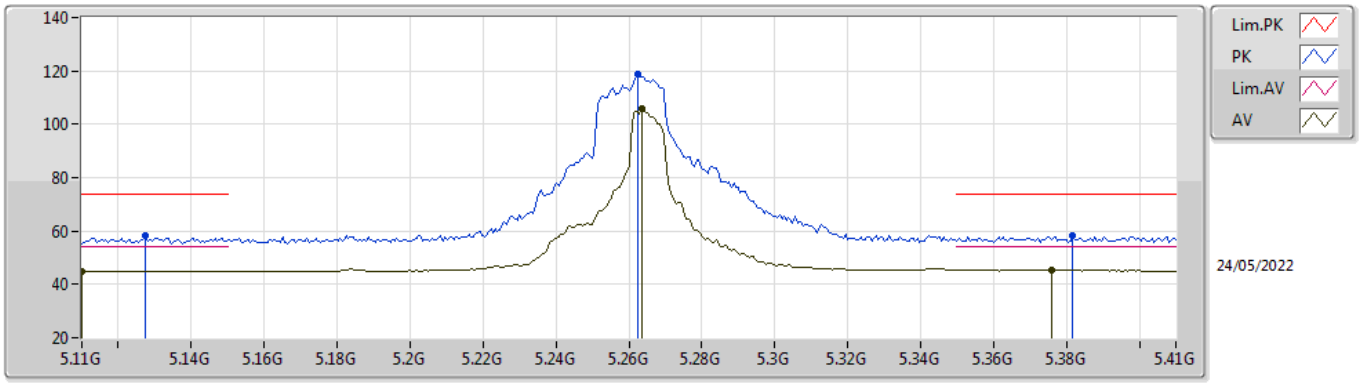


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1274G	58.37	74.00	-15.63	52.60	3	Vertical	217	1.74	-	33.95	7.16	35.34
AV	5.11G	44.88	54.00	-9.12	39.13	3	Vertical	217	1.74	-	33.92	7.16	35.33
PK	5.2624G	118.92	Inf	-Inf	112.64	3	Vertical	217	1.74	-	34.42	7.20	35.34
AV	5.2636G	105.88	Inf	-Inf	99.59	3	Vertical	217	1.74	-	34.43	7.20	35.34
PK	5.3818G	58.22	74.00	-15.78	51.81	3	Vertical	217	1.74	-	34.56	7.20	35.35
AV	5.3758G	45.33	54.00	-8.67	38.93	3	Vertical	217	1.74	-	34.55	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

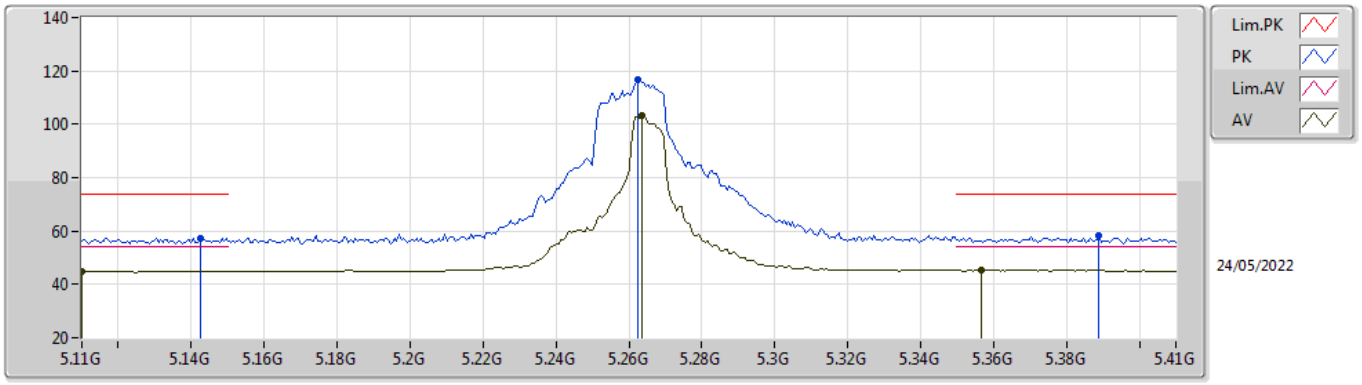


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1424G	57.47	74.00	-16.53	51.66	3	Horizontal	221	1.89	-	33.98	7.17	35.34
AV	5.11G	44.81	54.00	-9.19	39.06	3	Horizontal	221	1.89	-	33.92	7.16	35.33
PK	5.2624G	116.89	Inf	-Inf	110.61	3	Horizontal	221	1.89	-	34.42	7.20	35.34
AV	5.2636G	103.40	Inf	-Inf	97.11	3	Horizontal	221	1.89	-	34.43	7.20	35.34
PK	5.389G	58.17	74.00	-15.83	51.74	3	Horizontal	221	1.89	-	34.58	7.20	35.35
AV	5.3566G	45.25	54.00	-8.75	38.88	3	Horizontal	221	1.89	-	34.51	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

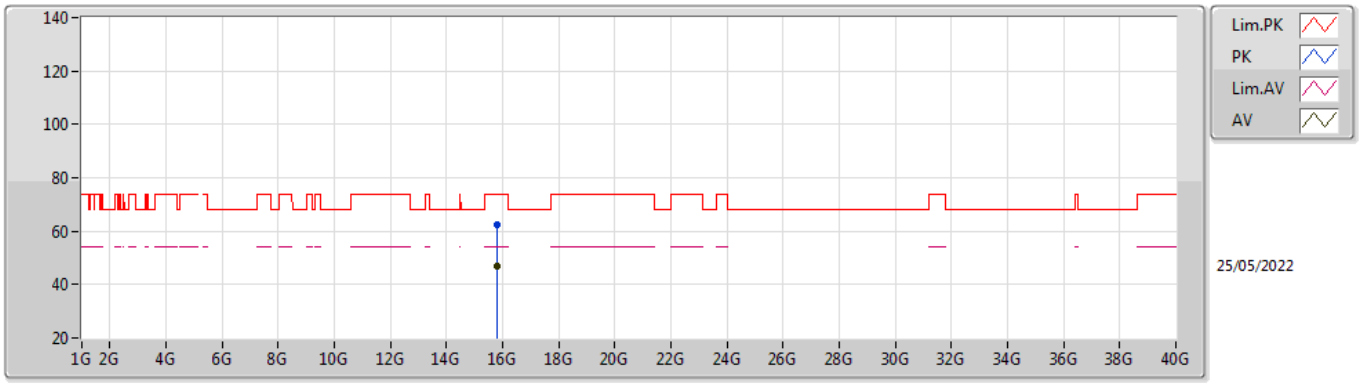


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.79098G	62.32	74.00	-11.68	46.77	3	Vertical	201	2.47	-	37.86	13.30	35.61
AV	15.79248G	46.91	54.00	-7.09	31.36	3	Vertical	201	2.47	-	37.87	13.30	35.62

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

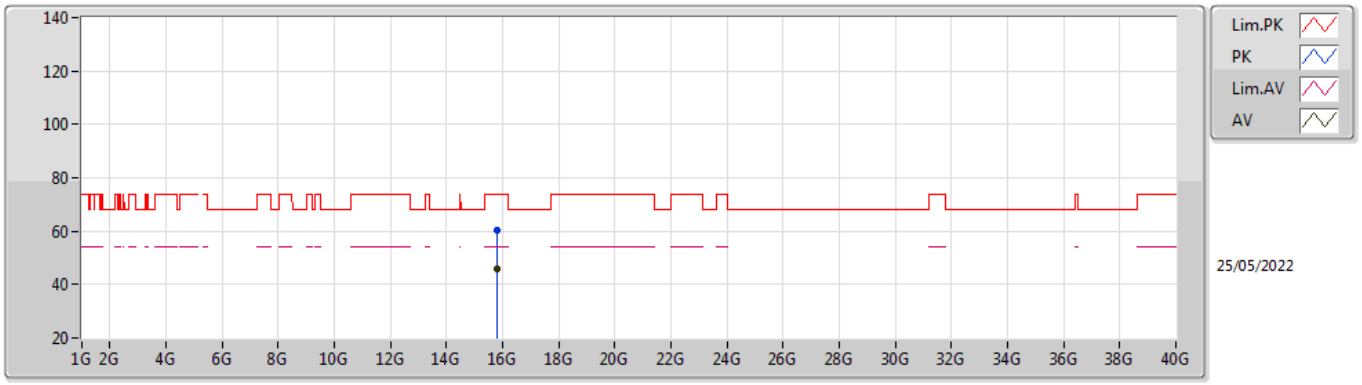


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7911G	60.12	74.00	-13.88	44.57	3	Horizontal	215	1.90	-	37.86	13.30	35.61
AV	15.79218G	45.65	54.00	-8.35	30.10	3	Horizontal	215	1.90	-	37.87	13.30	35.62

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

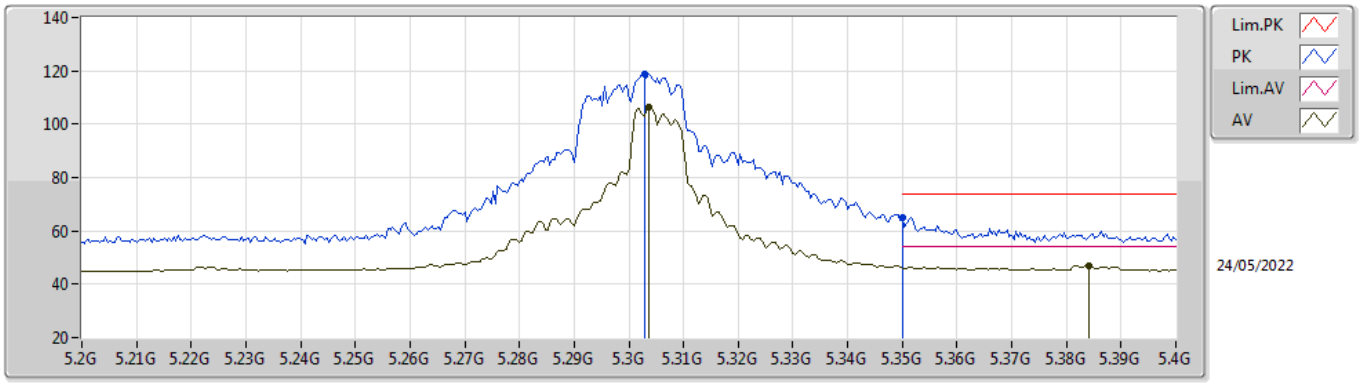


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3028G	118.93	Inf	-Inf	112.57	3	Vertical	218	1.70	-	34.50	7.20	35.34
AV	5.3036G	106.54	Inf	-Inf	100.18	3	Vertical	218	1.70	-	34.50	7.20	35.34
PK	5.35G	65.00	74.00	-9.00	58.64	3	Vertical	218	1.70	-	34.50	7.20	35.34
AV	5.384G	46.79	54.00	-7.21	40.37	3	Vertical	218	1.70	-	34.57	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

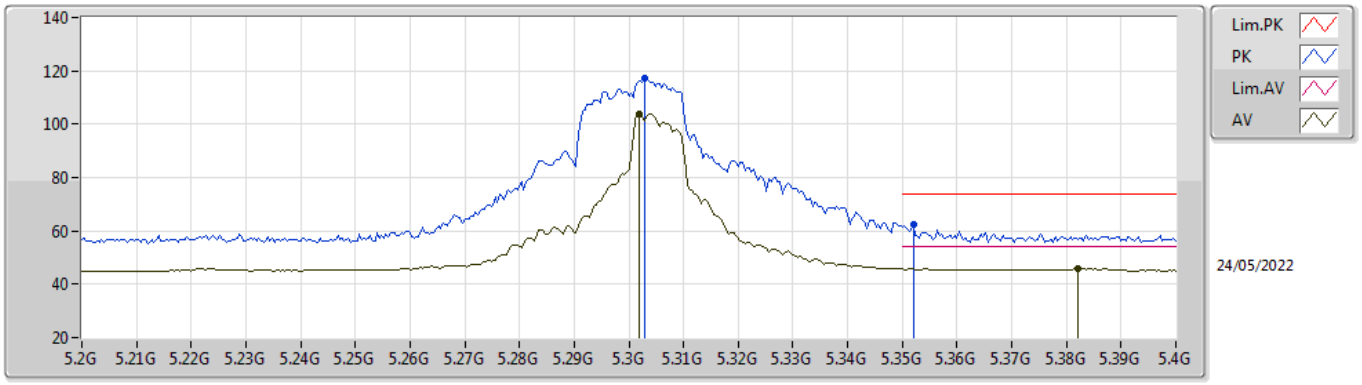


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3028G	117.07	Inf	-Inf	110.71	3	Horizontal	218	1.07	-	34.50	7.20	35.34
AV	5.302G	103.98	Inf	-Inf	97.62	3	Horizontal	218	1.07	-	34.50	7.20	35.34
PK	5.352G	62.30	74.00	-11.70	55.94	3	Horizontal	218	1.07	-	34.50	7.20	35.34
AV	5.382G	45.97	54.00	-8.03	39.56	3	Horizontal	218	1.07	-	34.56	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

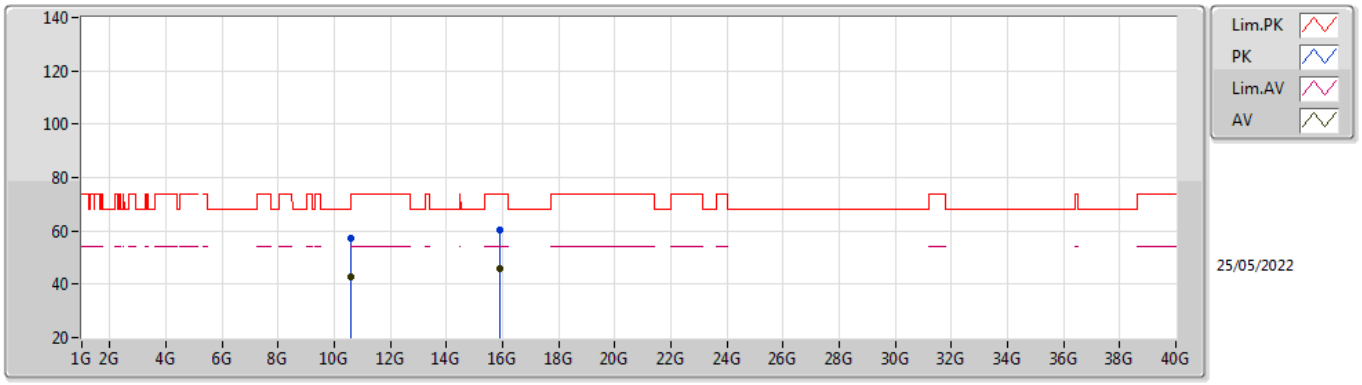


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60648G	57.13	74.00	-16.87	43.71	3	Vertical	208	1.80	-	38.21	10.59	35.38
AV	10.60636G	42.92	54.00	-11.08	29.50	3	Vertical	208	1.80	-	38.21	10.59	35.38
PK	15.91116G	60.30	74.00	-13.70	45.08	3	Vertical	199	2.52	-	37.58	13.36	35.72
AV	15.91272G	46.01	54.00	-7.99	30.80	3	Vertical	199	2.52	-	37.57	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

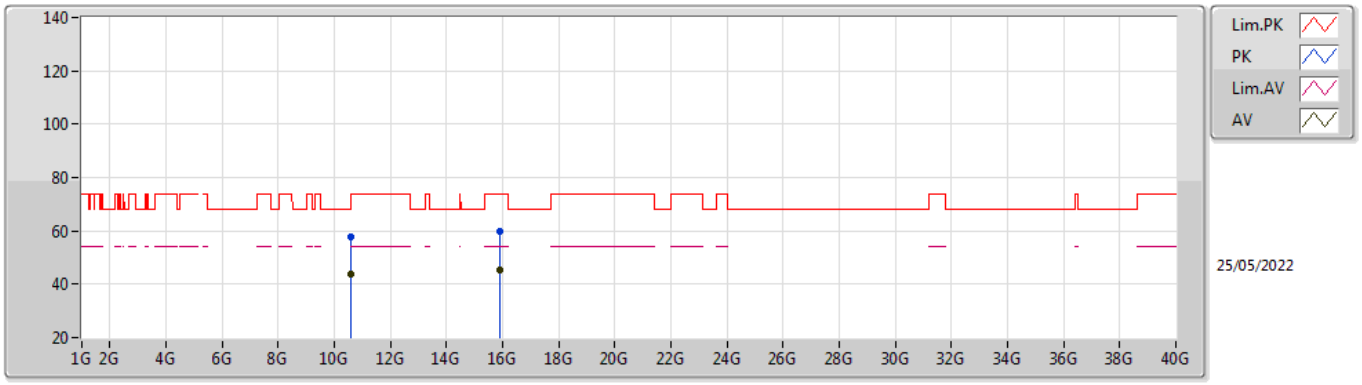


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.60876G	57.57	74.00	-16.43	44.14	3	Horizontal	204	1.76	-	38.22	10.59	35.38
AV	10.6093G	43.60	54.00	-10.40	30.17	3	Horizontal	204	1.76	-	38.22	10.59	35.38
PK	15.89382G	59.77	74.00	-14.23	44.50	3	Horizontal	250	1.80	-	37.62	13.35	35.70
AV	15.91218G	45.28	54.00	-8.72	30.06	3	Horizontal	250	1.80	-	37.58	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

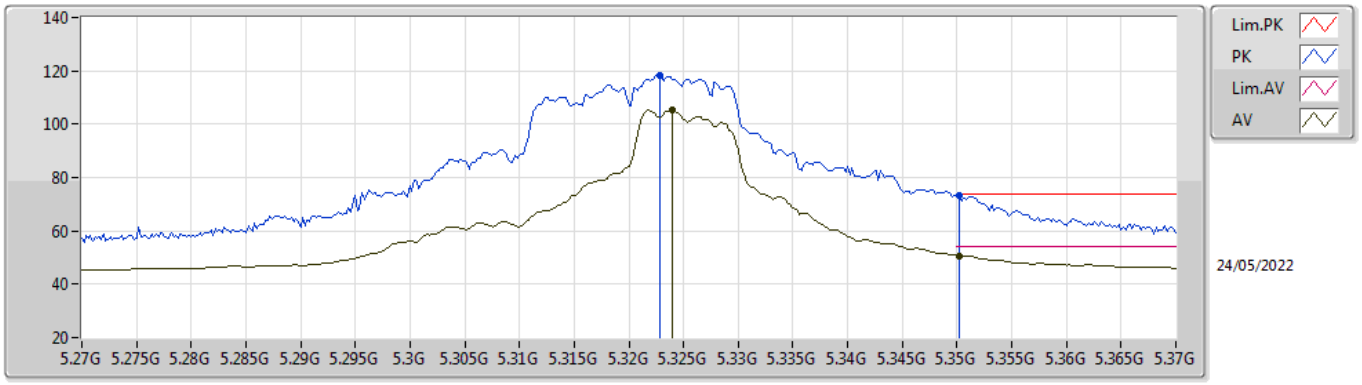


EUT X_2TX
Setting 19.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3228G	118.29	Inf	-Inf	111.93	3	Vertical	215	1.80	-	34.50	7.20	35.34
AV	5.324G	105.34	Inf	-Inf	98.98	3	Vertical	215	1.80	-	34.50	7.20	35.34
PK	5.3502G	73.50	74.00	-0.50	67.14	3	Vertical	215	1.80	-	34.50	7.20	35.34
AV	5.3502G	50.76	54.00	-3.24	44.40	3	Vertical	215	1.80	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

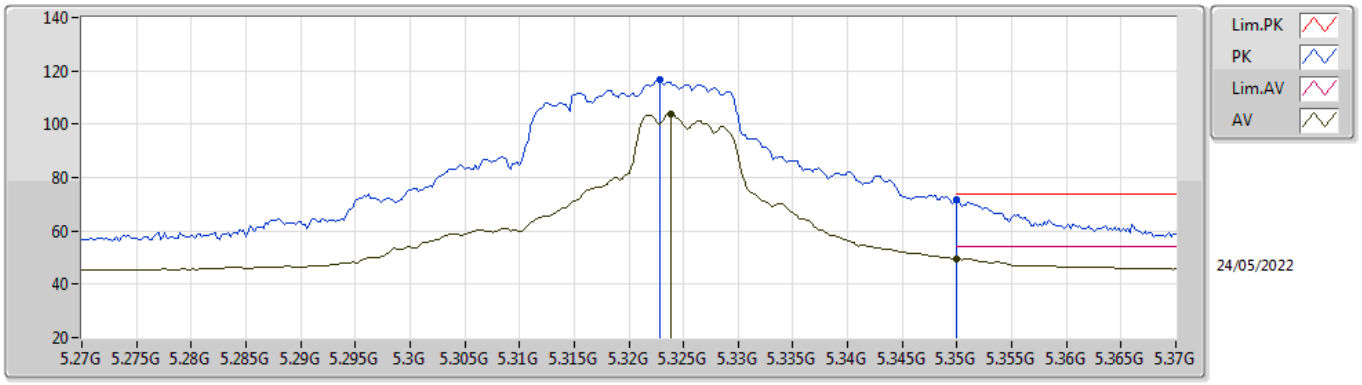


EUT X_2TX
Setting 19.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3228G	116.53	Inf	-Inf	110.17	3	Horizontal	221	1.86	-	34.50	7.20	35.34
AV	5.3238G	103.86	Inf	-Inf	97.50	3	Horizontal	221	1.86	-	34.50	7.20	35.34
PK	5.35G	71.66	74.00	-2.34	65.30	3	Horizontal	221	1.86	-	34.50	7.20	35.34
AV	5.35G	49.33	54.00	-4.67	42.97	3	Horizontal	221	1.86	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

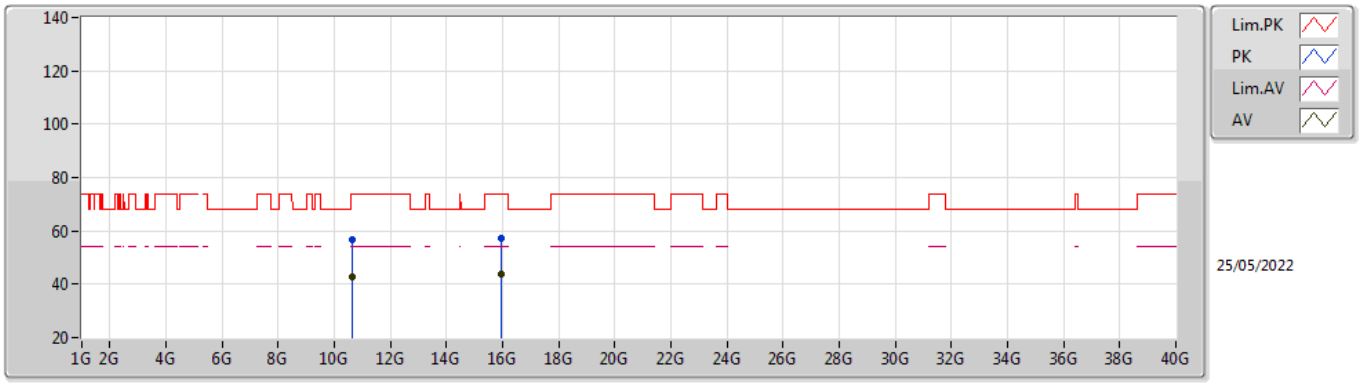


EUT X_2TX
Setting 19.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.64888G	56.61	74.00	-17.39	43.05	3	Vertical	222	1.76	-	38.30	10.60	35.34
AV	10.649G	42.74	54.00	-11.26	29.18	3	Vertical	222	1.76	-	38.30	10.60	35.34
PK	15.96672G	57.45	74.00	-16.55	42.36	3	Vertical	68	2.45	-	37.47	13.38	35.76
AV	15.9723G	43.90	54.00	-10.10	28.82	3	Vertical	68	2.45	-	37.46	13.39	35.77

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

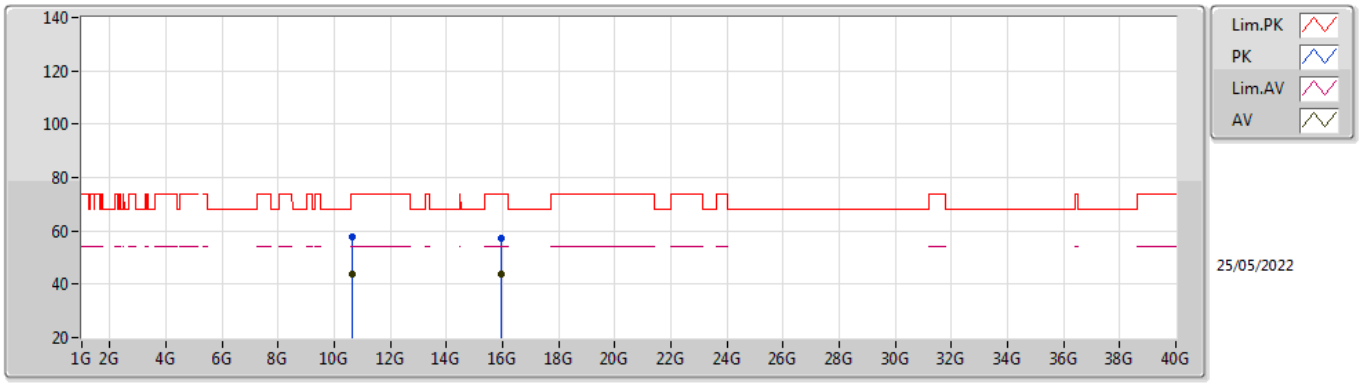


EUT X_2TX
Setting 19.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.64732G	57.51	74.00	-16.49	43.96	3	Horizontal	200	2.09	-	38.29	10.60	35.34
AV	10.64942G	43.77	54.00	-10.23	30.21	3	Horizontal	200	2.09	-	38.30	10.60	35.34
PK	15.96156G	57.47	74.00	-16.53	42.37	3	Horizontal	186	2.13	-	37.48	13.38	35.76
AV	15.9684G	44.01	54.00	-9.99	28.93	3	Horizontal	186	2.13	-	37.46	13.38	35.76

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

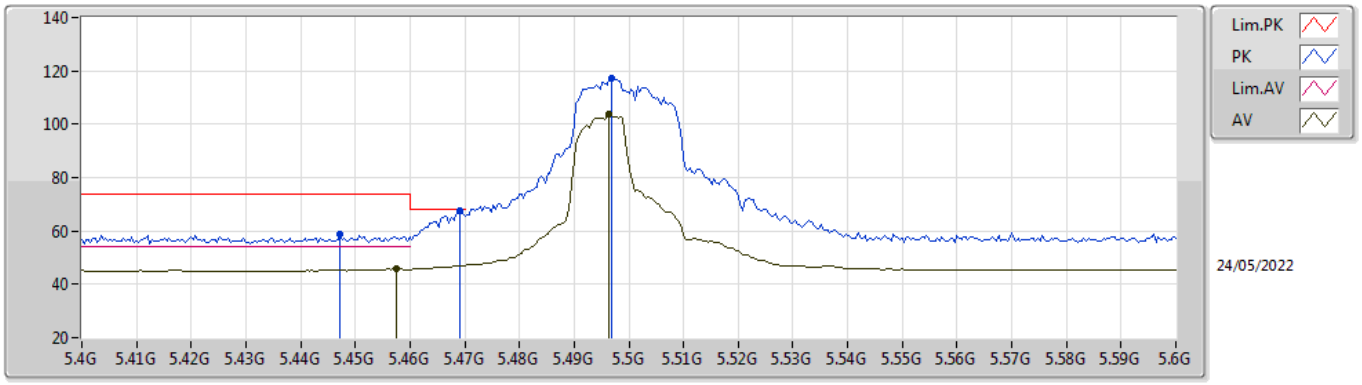


EUT X_2TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4472G	58.75	74.00	-15.25	52.34	3	Vertical	214	1.71	-	34.51	7.25	35.35
AV	5.4576G	45.73	54.00	-8.27	39.30	3	Vertical	214	1.71	-	34.52	7.26	35.35
PK	5.4692G	67.33	68.20	-0.87	60.87	3	Vertical	214	1.71	-	34.54	7.27	35.35
PK	5.4968G	117.25	Inf	-Inf	110.71	3	Vertical	214	1.71	-	34.59	7.30	35.35
AV	5.4964G	103.64	Inf	-Inf	97.10	3	Vertical	214	1.71	-	34.59	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

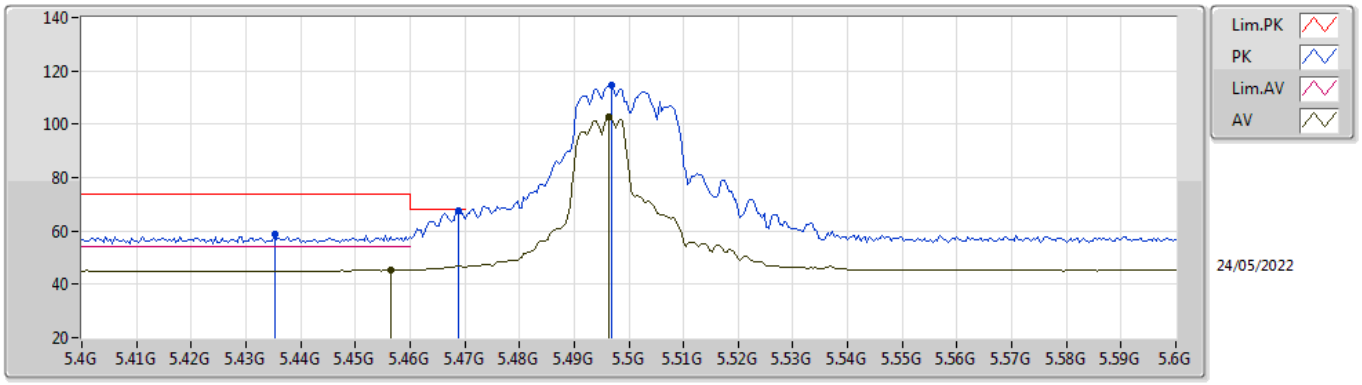


EUT X_2TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4352G	58.64	74.00	-15.36	52.22	3	Horizontal	220	2.68	-	34.53	7.24	35.35
PK	5.4688G	67.82	68.20	-0.38	61.36	3	Horizontal	220	2.68	-	34.54	7.27	35.35
AV	5.4564G	45.56	54.00	-8.44	39.14	3	Horizontal	220	2.68	-	34.51	7.26	35.35
PK	5.4968G	114.53	Inf	-Inf	107.99	3	Horizontal	220	2.68	-	34.59	7.30	35.35
AV	5.4964G	102.98	Inf	-Inf	96.44	3	Horizontal	220	2.68	-	34.59	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

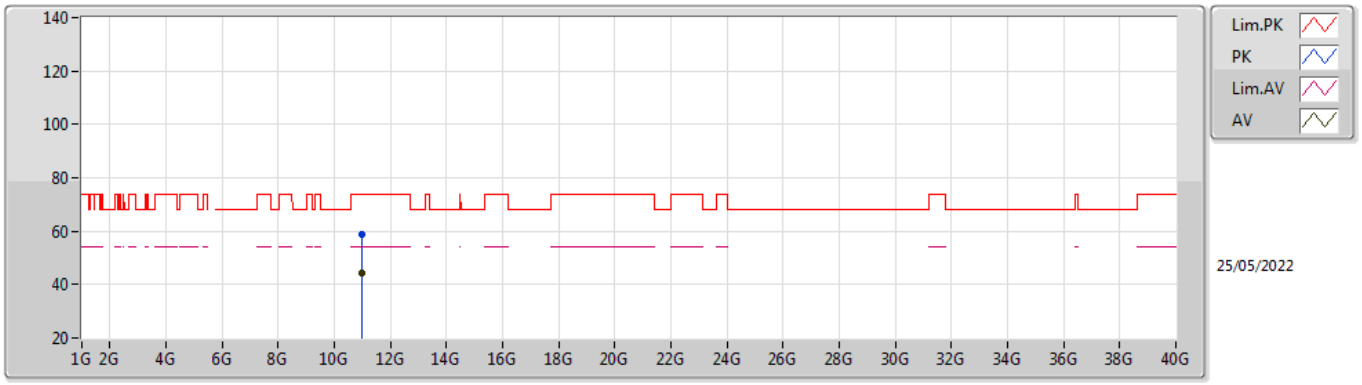


EUT X_2TX
Setting 18
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.99166G	58.78	74.00	-15.22	44.79	3	Vertical	228	1.66	-	38.39	10.65	35.05
AV	10.99142G	44.22	54.00	-9.78	30.23	3	Vertical	228	1.66	-	38.39	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

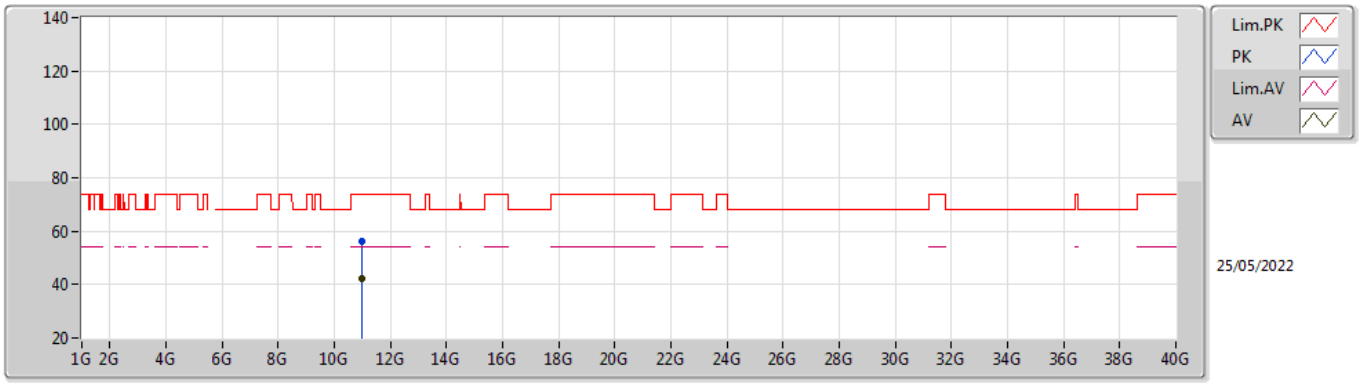


EUT X_2TX
Setting 18
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9916G	56.28	74.00	-17.72	42.29	3	Horizontal	215	1.80	-	38.39	10.65	35.05
AV	10.99142G	42.50	54.00	-11.50	28.51	3	Horizontal	215	1.80	-	38.39	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

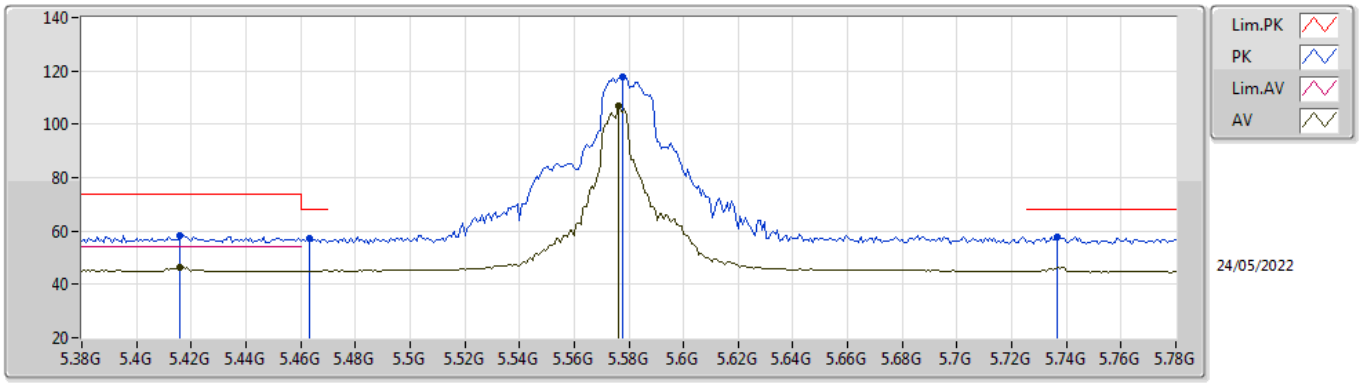


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.416G	58.39	74.00	-15.61	51.95	3	Vertical	218	1.76	-	34.57	7.22	35.35
AV	5.416G	46.51	54.00	-7.49	40.07	3	Vertical	218	1.76	-	34.57	7.22	35.35
PK	5.4632G	56.99	68.20	-11.21	50.55	3	Vertical	218	1.76	-	34.53	7.26	35.35
PK	5.5776G	118.01	Inf	-Inf	111.42	3	Vertical	218	1.76	-	34.60	7.38	35.39
AV	5.576G	106.92	Inf	-Inf	100.33	3	Vertical	218	1.76	-	34.60	7.38	35.39
PK	5.7368G	57.93	68.20	-10.27	51.77	3	Vertical	218	1.76	-	34.23	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

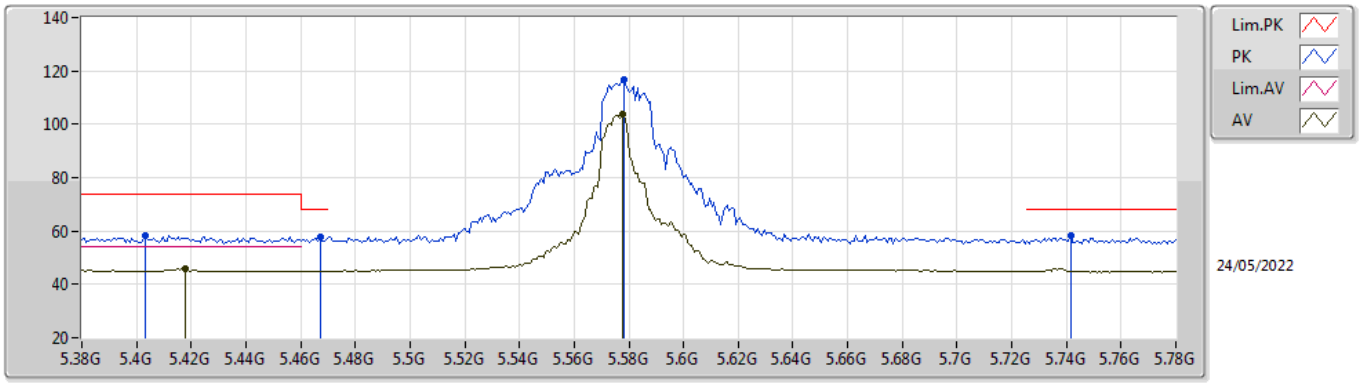


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4032G	58.52	74.00	-15.48	52.08	3	Horizontal	200	1.80	-	34.59	7.20	35.35
AV	5.4176G	46.06	54.00	-7.94	39.63	3	Horizontal	200	1.80	-	34.56	7.22	35.35
PK	5.4672G	57.59	68.20	-10.61	51.14	3	Horizontal	200	1.80	-	34.53	7.27	35.35
PK	5.5784G	116.70	Inf	-Inf	110.11	3	Horizontal	200	1.80	-	34.60	7.38	35.39
AV	5.5776G	103.93	Inf	-Inf	97.34	3	Horizontal	200	1.80	-	34.60	7.38	35.39
PK	5.7416G	58.34	68.20	-9.86	52.19	3	Horizontal	200	1.80	-	34.22	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

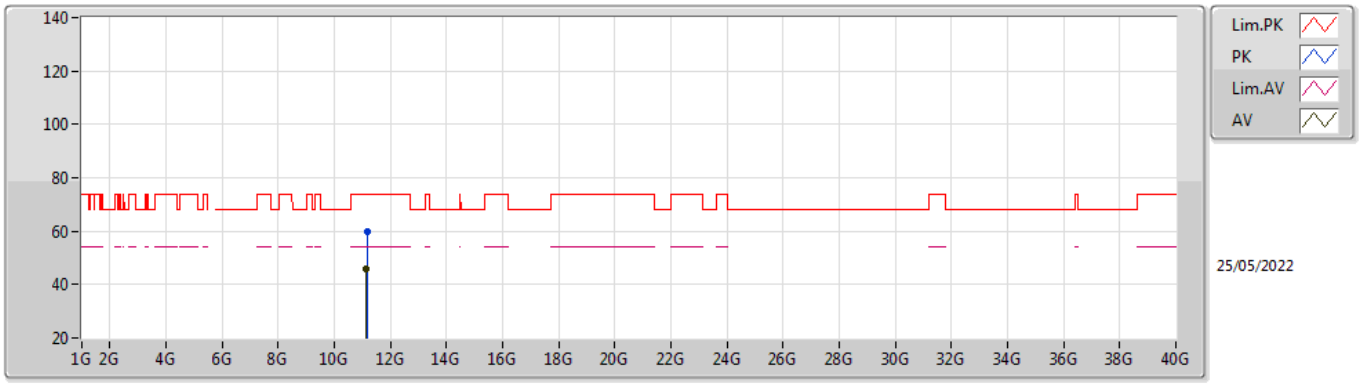


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.15892G	59.62	74.00	-14.38	45.61	3	Vertical	325	1.78	-	38.56	10.67	35.22
AV	11.15424G	45.87	54.00	-8.13	31.86	3	Vertical	325	1.78	-	38.55	10.67	35.21

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

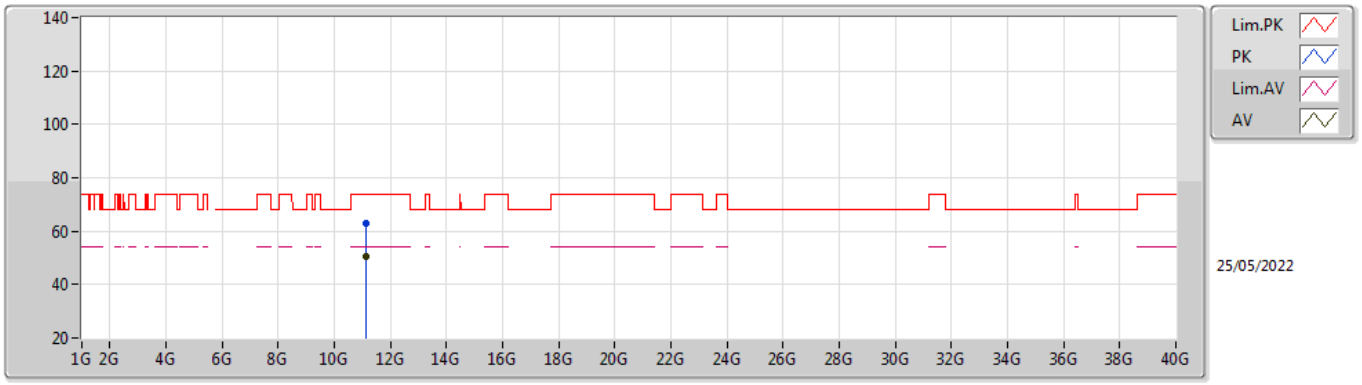


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1513G	63.13	74.00	-10.87	49.12	3	Horizontal	219	2.10	-	38.55	10.67	35.21
AV	11.15148G	50.35	54.00	-3.65	36.34	3	Horizontal	219	2.10	-	38.55	10.67	35.21

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

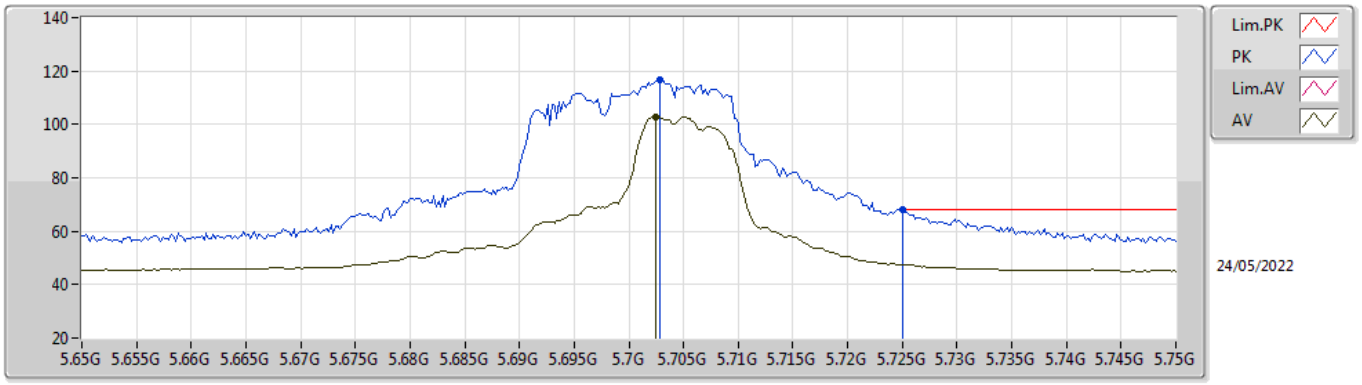


EUT X_2TX
Setting 16.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7028G	116.82	Inf	-Inf	110.58	3	Vertical	214	1.80	-	34.29	7.40	35.45
AV	5.7024G	102.92	Inf	-Inf	96.67	3	Vertical	214	1.80	-	34.30	7.40	35.45
PK	5.725G	67.98	68.20	-0.22	61.79	3	Vertical	214	1.80	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

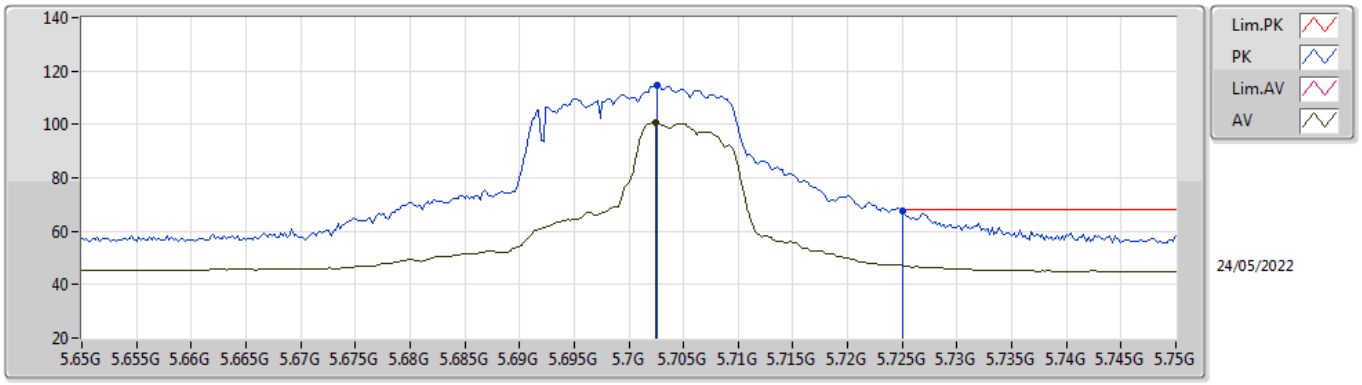


EUT X_2TX
Setting 16.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7026G	114.70	Inf	-Inf	108.46	3	Horizontal	205	1.97	-	34.29	7.40	35.45
AV	5.7024G	100.84	Inf	-Inf	94.59	3	Horizontal	205	1.97	-	34.30	7.40	35.45
PK	5.725G	67.53	68.20	-0.67	61.34	3	Horizontal	205	1.97	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

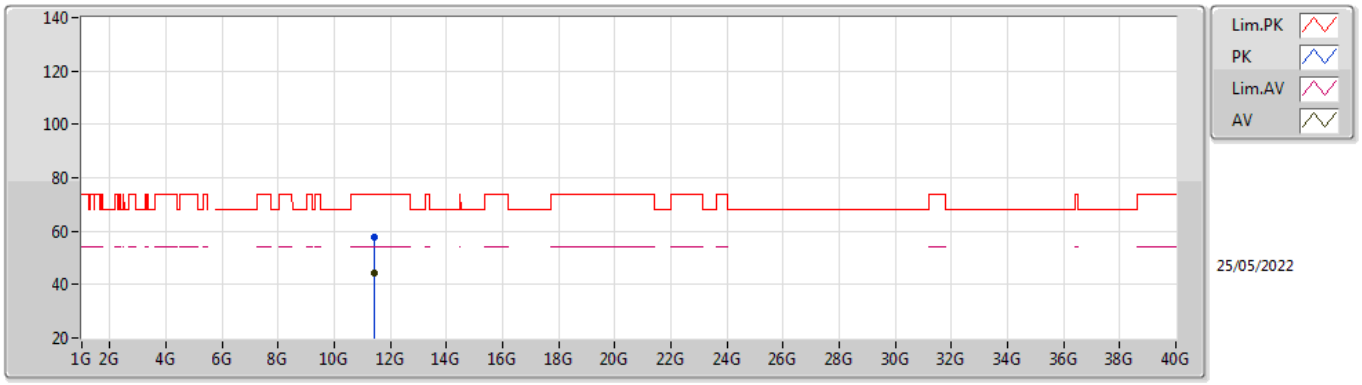


EUT X_2TX
Setting 16.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.40708G	57.94	74.00	-16.06	43.92	3	Vertical	152	2.81	-	38.81	10.71	35.50
AV	11.4096G	44.17	54.00	-9.83	30.14	3	Vertical	152	2.81	-	38.82	10.71	35.50

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

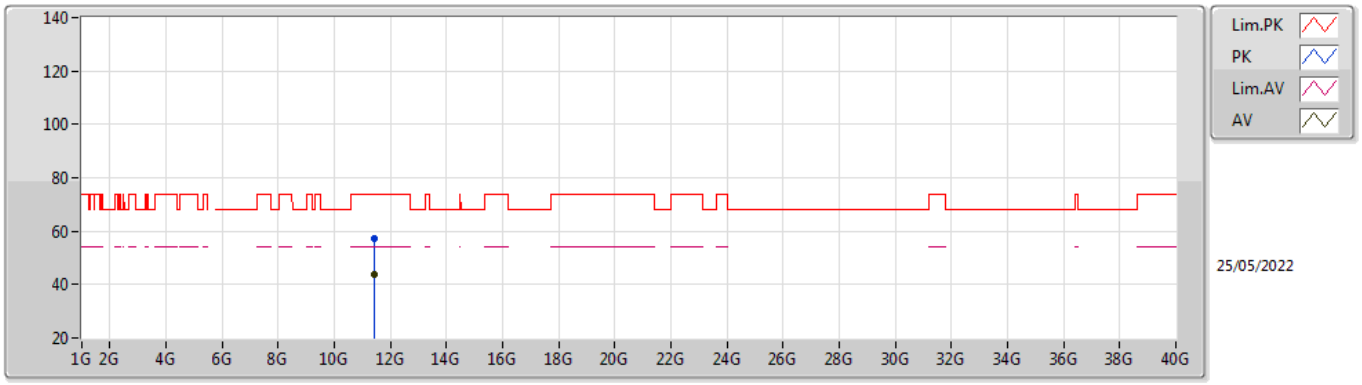


EUT X_2TX
Setting 16.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.40798G	57.48	74.00	-16.52	43.45	3	Horizontal	163	1.07	-	38.82	10.71	35.50
AV	11.40762G	43.64	54.00	-10.36	29.61	3	Horizontal	163	1.07	-	38.82	10.71	35.50

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

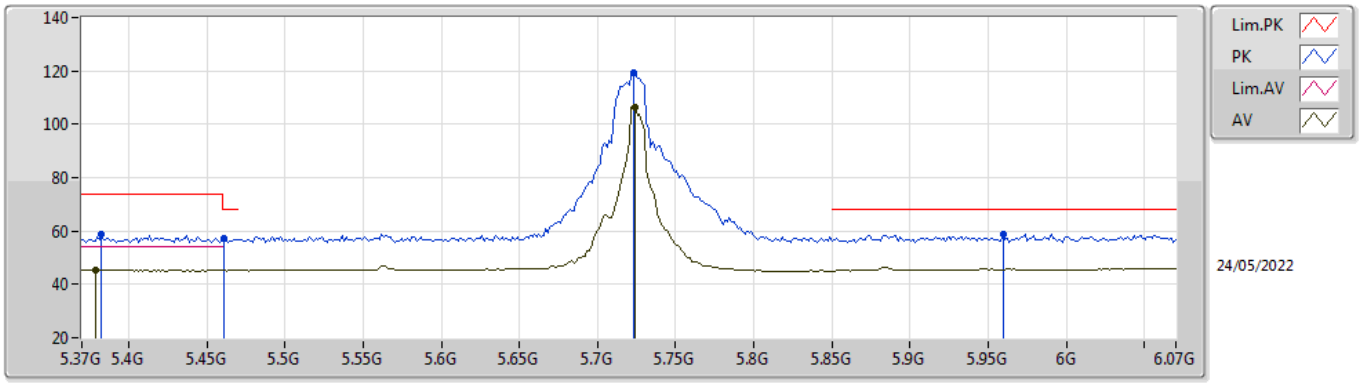


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3826G	58.60	74.00	-15.40	52.18	3	Vertical	216	1.80	-	34.57	7.20	35.35
AV	5.3784G	45.31	54.00	-8.69	38.90	3	Vertical	216	1.80	-	34.56	7.20	35.35
PK	5.461G	57.20	68.20	-11.00	50.77	3	Vertical	216	1.80	-	34.52	7.26	35.35
PK	5.7228G	119.40	Inf	-Inf	113.21	3	Vertical	216	1.80	-	34.25	7.40	35.46
AV	5.7242G	106.46	Inf	-Inf	100.27	3	Vertical	216	1.80	-	34.25	7.40	35.46
PK	5.9594G	58.84	68.20	-9.36	52.06	3	Vertical	216	1.80	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

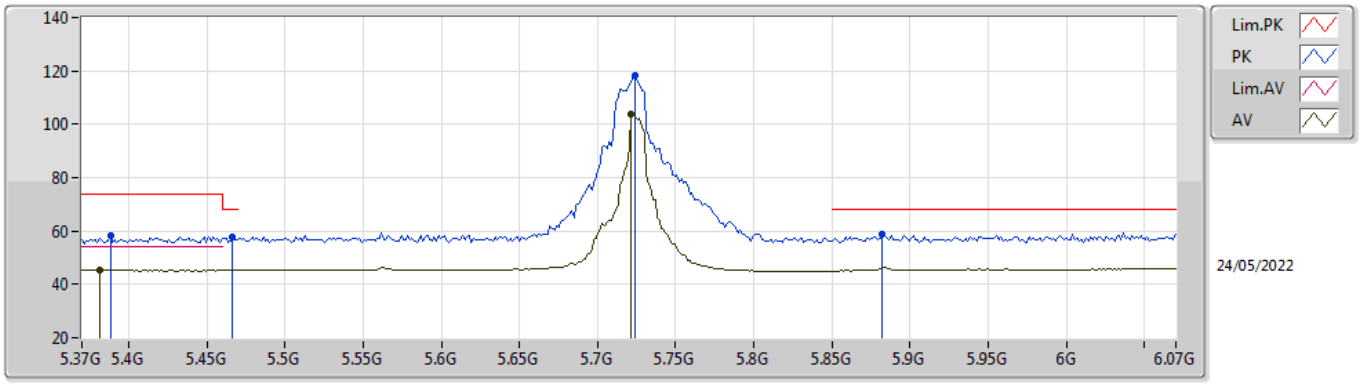


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3882G	58.02	74.00	-15.98	51.59	3	Horizontal	205	1.94	-	34.58	7.20	35.35
AV	5.3812G	45.30	54.00	-8.70	38.89	3	Horizontal	205	1.94	-	34.56	7.20	35.35
PK	5.4666G	57.67	68.20	-10.53	51.22	3	Horizontal	205	1.94	-	34.53	7.27	35.35
PK	5.7242G	118.15	Inf	-Inf	111.96	3	Horizontal	205	1.94	-	34.25	7.40	35.46
AV	5.7214G	103.70	Inf	-Inf	97.50	3	Horizontal	205	1.94	-	34.26	7.40	35.46
PK	5.8824G	58.66	68.20	-9.54	52.23	3	Horizontal	205	1.94	-	34.49	7.48	35.54

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

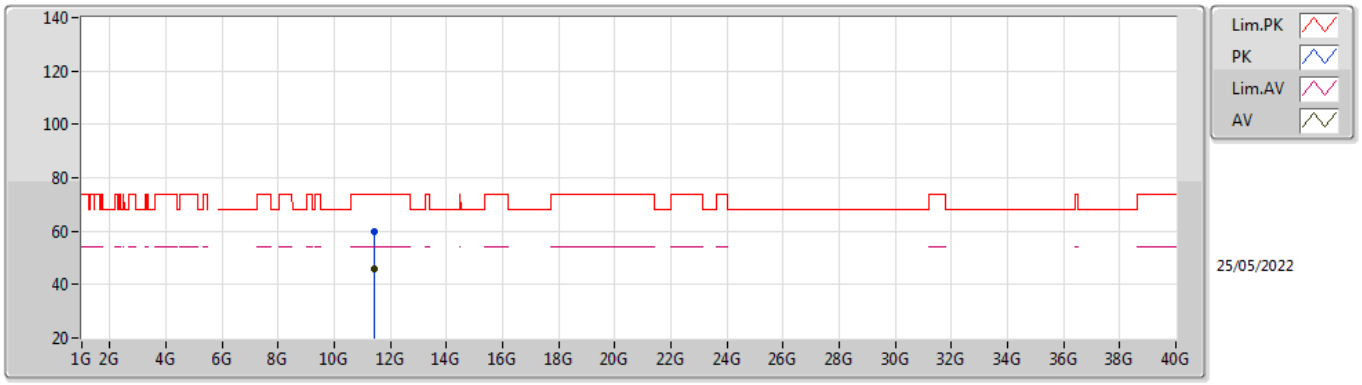


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.43886G	59.98	74.00	-14.02	45.91	3	Vertical	73	2.29	-	38.88	10.72	35.53
AV	11.44936G	45.90	54.00	-8.10	31.82	3	Vertical	73	2.29	-	38.90	10.72	35.54

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

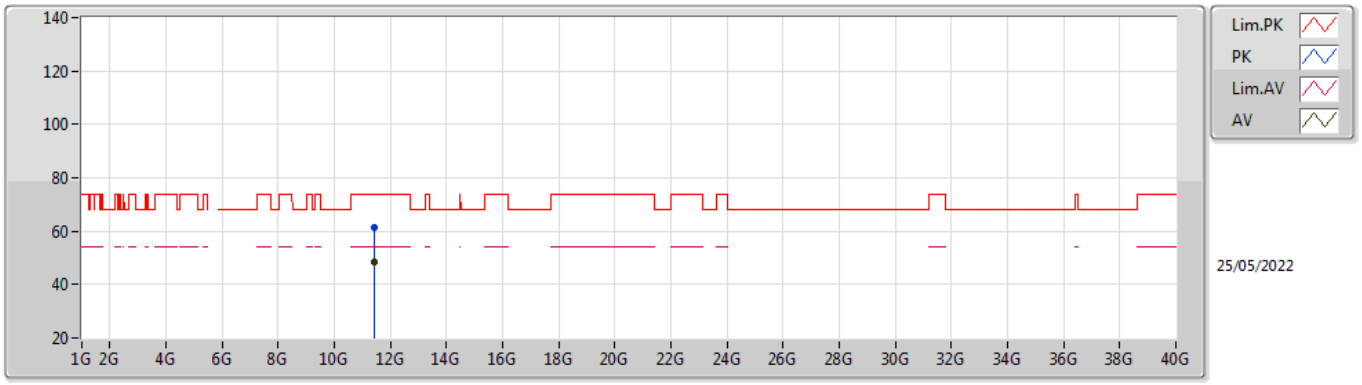


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.44774G	61.61	74.00	-12.39	47.53	3	Horizontal	196	1.80	-	38.90	10.72	35.54
AV	11.44552G	48.61	54.00	-5.39	34.54	3	Horizontal	196	1.80	-	38.89	10.72	35.54

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

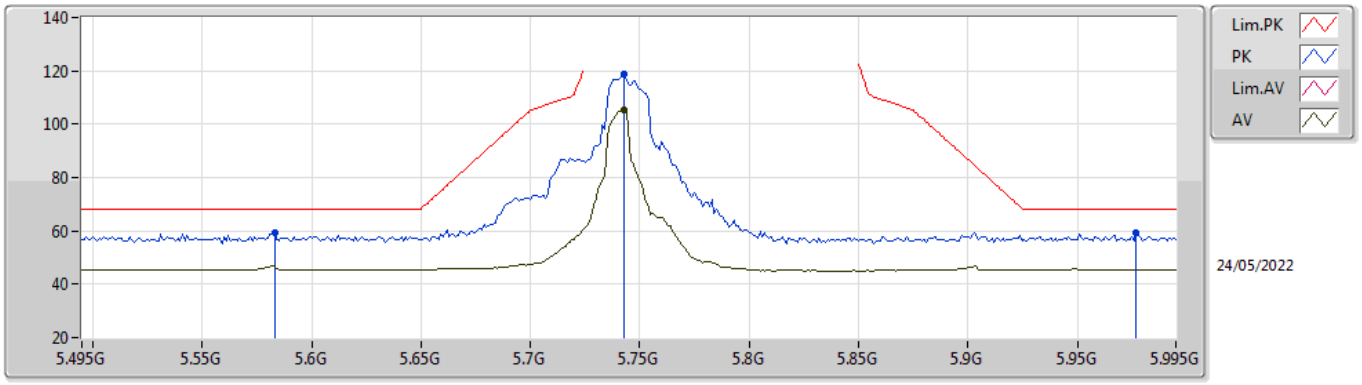


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.583G	59.16	68.20	-9.04	52.57	3	Vertical	214	1.77	-	34.60	7.38	35.39
PK	5.743G	118.64	Inf	-Inf	112.50	3	Vertical	214	1.77	-	34.21	7.40	35.47
AV	5.743G	105.57	Inf	-Inf	99.43	3	Vertical	214	1.77	-	34.21	7.40	35.47
PK	5.977G	59.15	68.20	-9.05	52.36	3	Vertical	214	1.77	-	34.80	7.58	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

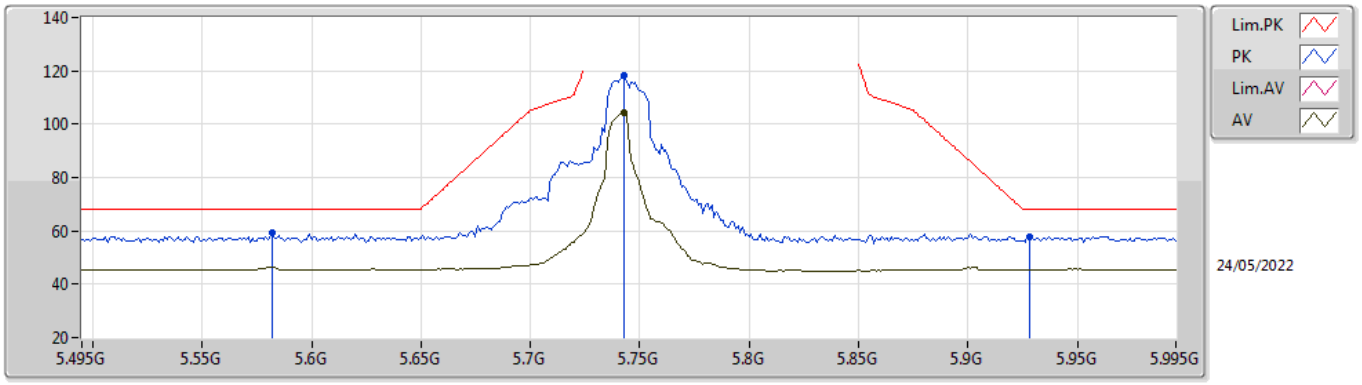


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.582G	59.22	68.20	-8.98	52.63	3	Horizontal	216	2.61	-	34.60	7.38	35.39
PK	5.743G	118.17	Inf	-Inf	112.03	3	Horizontal	216	2.61	-	34.21	7.40	35.47
AV	5.743G	104.51	Inf	-Inf	98.37	3	Horizontal	216	2.61	-	34.21	7.40	35.47
PK	5.928G	57.98	68.20	-10.22	51.30	3	Horizontal	216	2.61	-	34.71	7.53	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

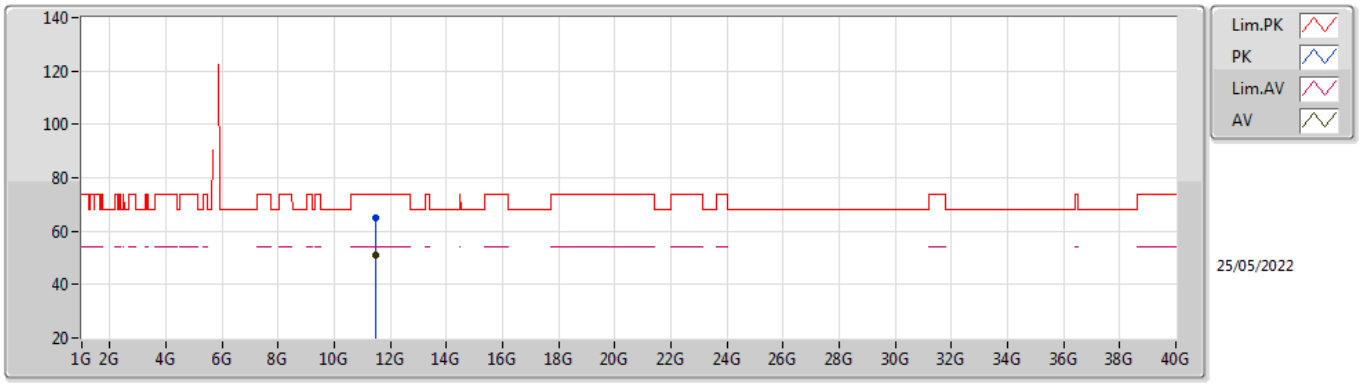


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.48904G	64.83	74.00	-9.17	50.72	3	Vertical	176	2.77	-	38.98	10.72	35.59
AV	11.4816G	50.97	54.00	-3.03	36.87	3	Vertical	176	2.77	-	38.96	10.72	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

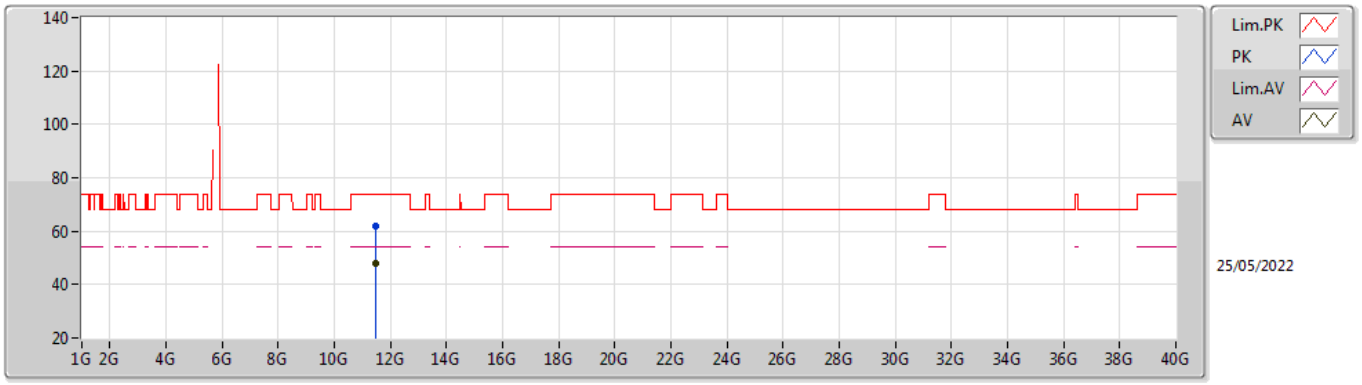


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4828G	61.84	74.00	-12.16	47.73	3	Horizontal	196	1.80	-	38.97	10.72	35.58
AV	11.48052G	48.17	54.00	-5.83	34.07	3	Horizontal	196	1.80	-	38.96	10.72	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

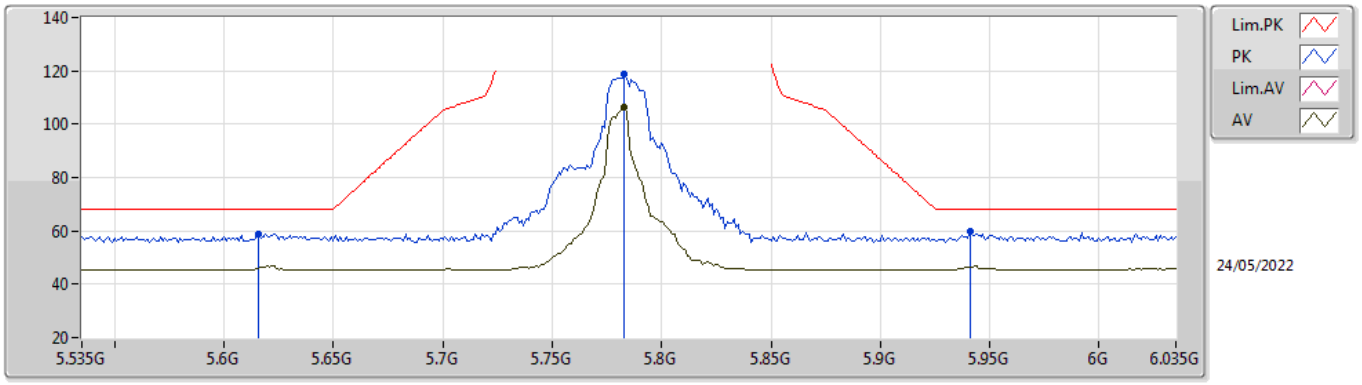


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.616G	58.88	68.20	-9.32	52.32	3	Vertical	212	1.74	-	34.57	7.40	35.41
PK	5.783G	119.04	Inf	-Inf	112.93	3	Vertical	212	1.74	-	34.20	7.40	35.49
AV	5.783G	106.40	Inf	-Inf	100.29	3	Vertical	212	1.74	-	34.20	7.40	35.49
PK	5.941G	59.68	68.20	-8.52	52.95	3	Vertical	212	1.74	-	34.76	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

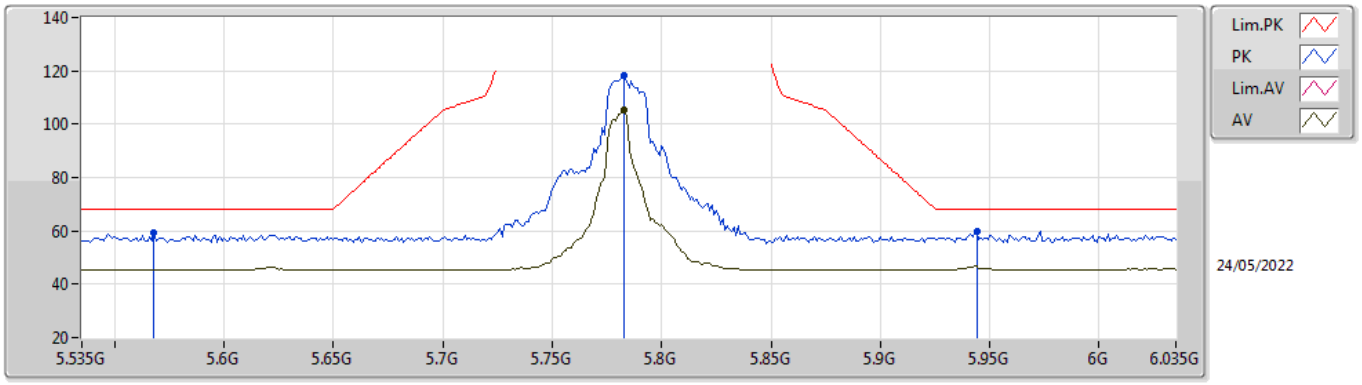


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.568G	59.15	68.20	-9.05	52.56	3	Horizontal	214	2.59	-	34.60	7.37	35.38
PK	5.783G	118.37	Inf	-Inf	112.26	3	Horizontal	214	2.59	-	34.20	7.40	35.49
AV	5.783G	105.18	Inf	-Inf	99.07	3	Horizontal	214	2.59	-	34.20	7.40	35.49
PK	5.944G	59.86	68.20	-8.34	53.11	3	Horizontal	214	2.59	-	34.78	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

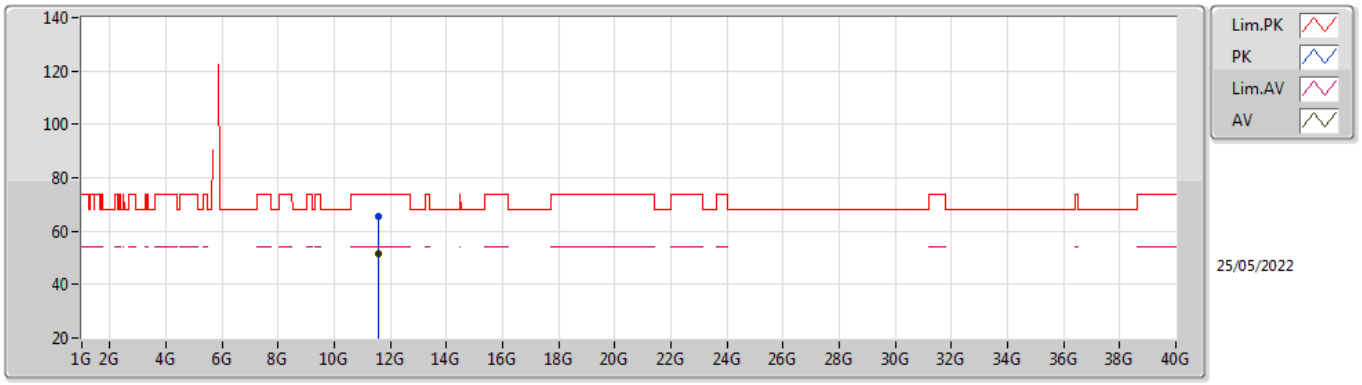


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.56904G	65.70	74.00	-8.30	51.26	3	Vertical	174	2.80	-	39.28	10.74	35.58
AV	11.5616G	51.38	54.00	-2.62	36.99	3	Vertical	174	2.80	-	39.25	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

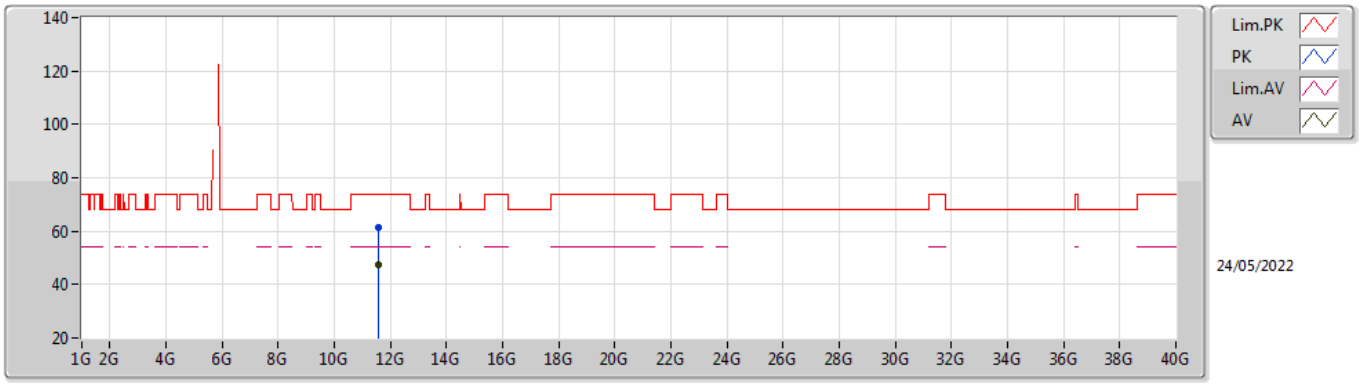


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.56946G	61.31	74.00	-12.69	46.87	3	Horizontal	144	2.02	-	39.28	10.74	35.58
AV	11.56046G	47.28	54.00	-6.72	32.90	3	Horizontal	144	2.02	-	39.24	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

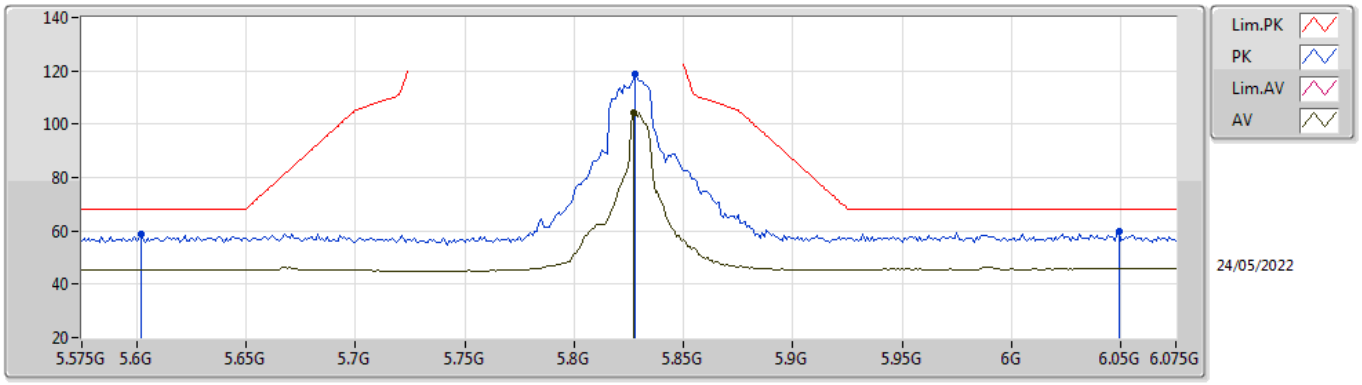


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.602G	58.66	68.20	-9.54	52.06	3	Vertical	215	1.80	-	34.60	7.40	35.40
PK	5.828G	118.97	Inf	-Inf	112.79	3	Vertical	215	1.80	-	34.26	7.43	35.51
AV	5.827G	104.34	Inf	-Inf	98.17	3	Vertical	215	1.80	-	34.25	7.43	35.51
PK	6.049G	59.94	68.20	-8.26	53.00	3	Vertical	215	1.80	-	34.90	7.62	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

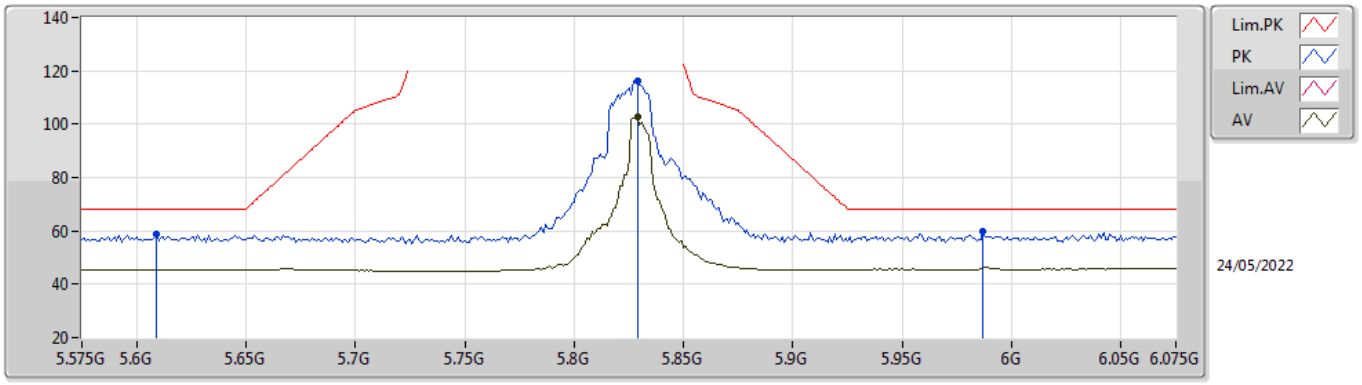


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.609G	58.77	68.20	-9.43	52.19	3	Horizontal	206	1.80	-	34.58	7.40	35.40
PK	5.829G	116.24	Inf	-Inf	110.06	3	Horizontal	206	1.80	-	34.26	7.43	35.51
AV	5.829G	102.56	Inf	-Inf	96.38	3	Horizontal	206	1.80	-	34.26	7.43	35.51
PK	5.987G	59.85	68.20	-8.35	53.05	3	Horizontal	206	1.80	-	34.80	7.59	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

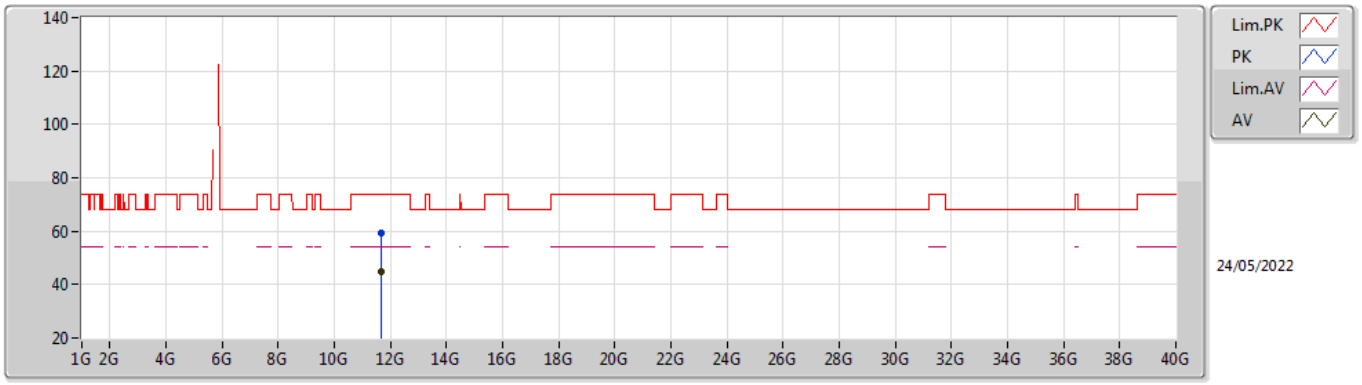


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65486G	59.10	74.00	-14.90	44.52	3	Vertical	312	1.85	-	39.40	10.75	35.57
AV	11.65972G	45.03	54.00	-8.97	30.44	3	Vertical	312	1.85	-	39.40	10.75	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

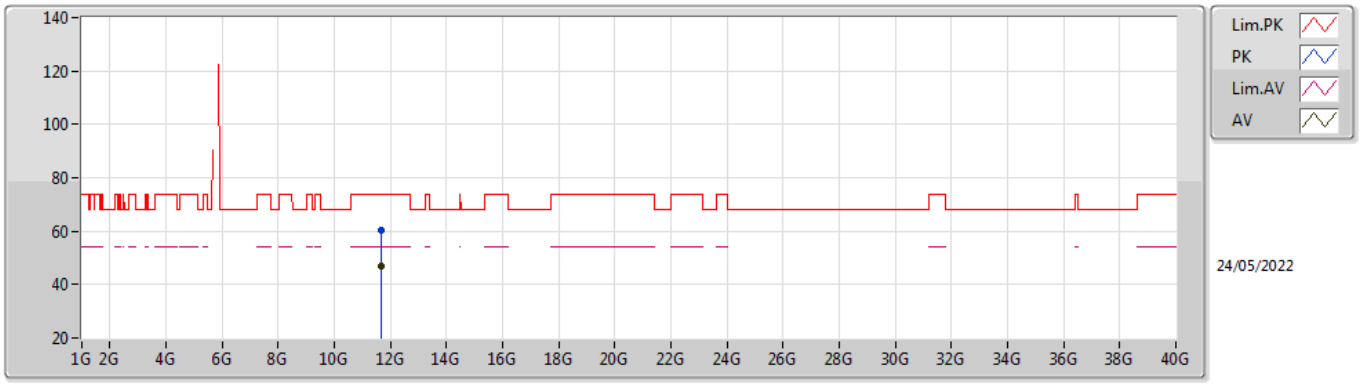

EUT X_2TX
Setting 21.5
03-B-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65804G	60.52	74.00	-13.48	45.94	3	Horizontal	197	1.67	-	39.40	10.75	35.57
AV	11.65546G	47.11	54.00	-6.89	32.53	3	Horizontal	197	1.67	-	39.40	10.75	35.57

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	AV	11.4572G	53.98	54.00	-0.02	3	Vertical	199	1.00	-

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

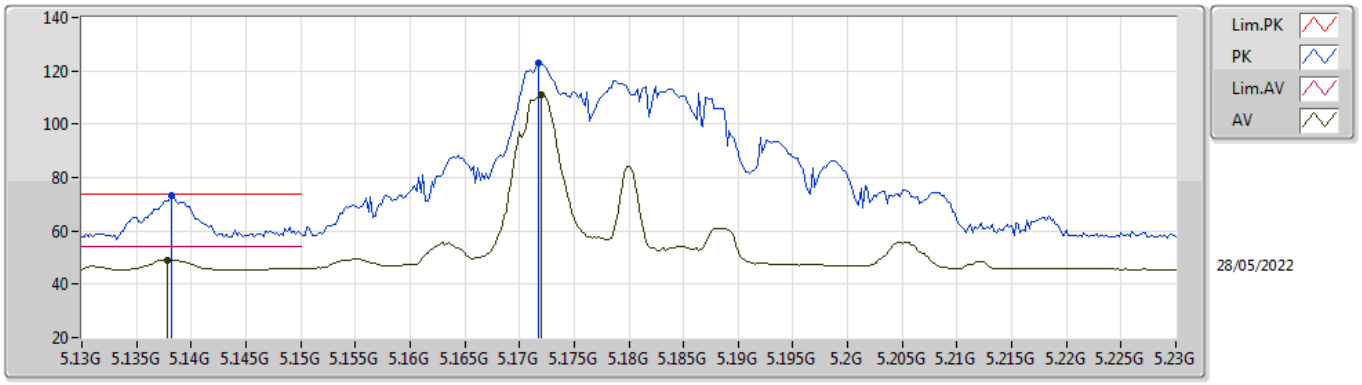


EUT X_2TX
Setting 20.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1382G	73.52	74.00	-0.48	67.71	3	Vertical	174	2.11	-	33.98	7.17	35.34
AV	5.1378G	49.21	54.00	-4.79	43.40	3	Vertical	174	2.11	-	33.98	7.17	35.34
PK	5.1718G	122.90	Inf	-Inf	116.96	3	Vertical	174	2.11	-	34.09	7.19	35.34
AV	5.172G	110.97	Inf	-Inf	105.03	3	Vertical	174	2.11	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

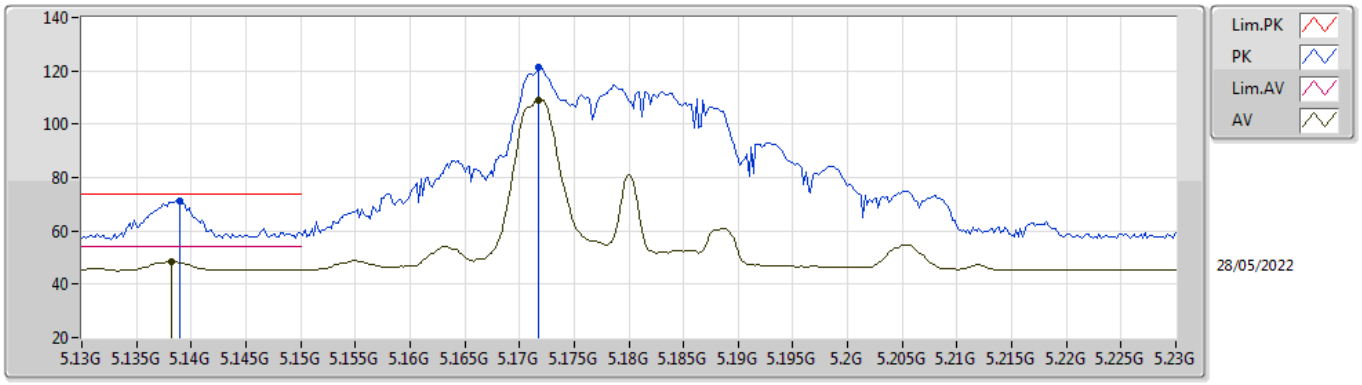


EUT X_2TX
Setting 20.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.139G	71.37	74.00	-2.63	65.56	3	Horizontal	183	2.10	-	33.98	7.17	35.34
AV	5.1382G	48.58	54.00	-5.42	42.77	3	Horizontal	183	2.10	-	33.98	7.17	35.34
PK	5.1718G	121.23	Inf	-Inf	115.29	3	Horizontal	183	2.10	-	34.09	7.19	35.34
AV	5.1718G	109.13	Inf	-Inf	103.19	3	Horizontal	183	2.10	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

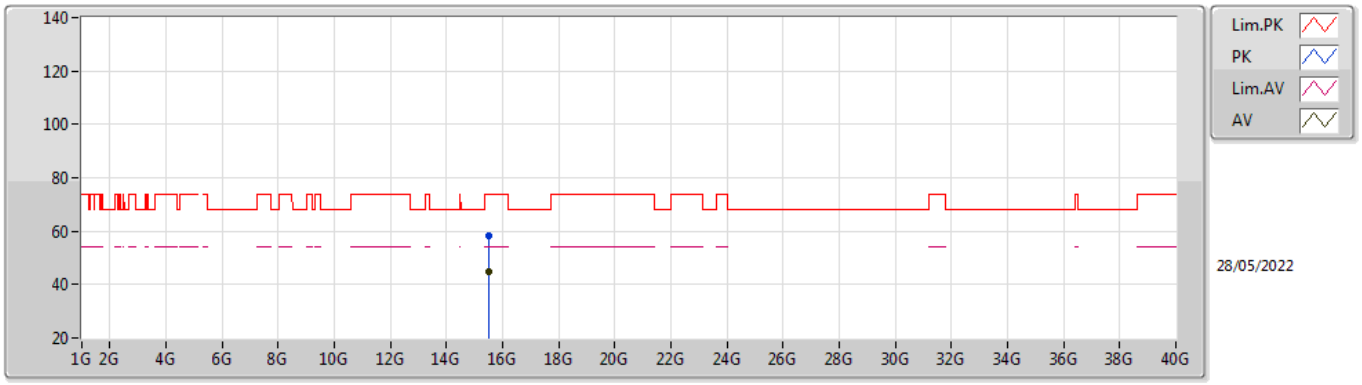


EUT X_2TX
Setting 20.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.51G	58.15	74.00	-15.85	41.74	3	Vertical	144	2.30	-	38.63	13.16	35.38
AV	15.5016G	45.08	54.00	-8.92	28.61	3	Vertical	144	2.30	-	38.69	13.15	35.37

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

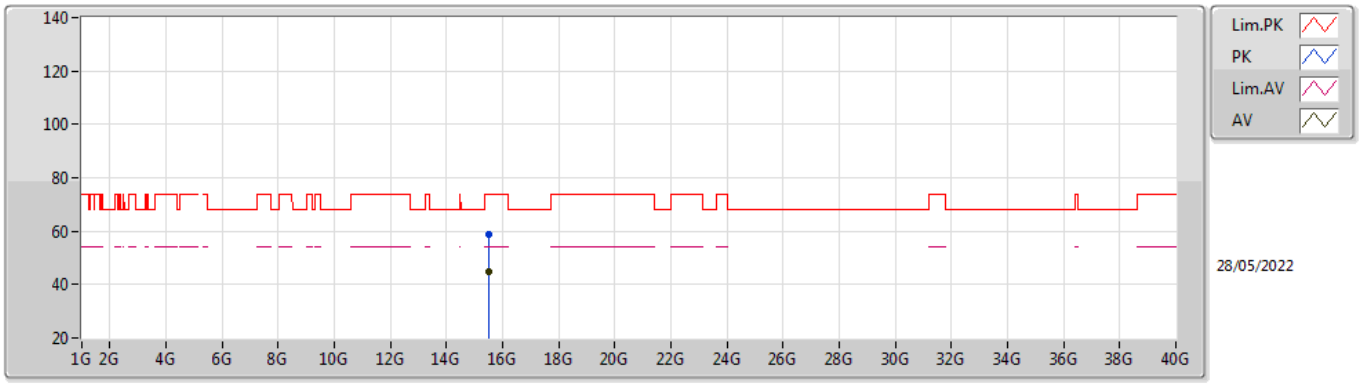


EUT X_2TX
Setting 20.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5046G	58.79	74.00	-15.21	42.34	3	Horizontal	113	1.97	-	38.67	13.15	35.37
AV	15.5024G	45.02	54.00	-8.98	28.56	3	Horizontal	113	1.97	-	38.68	13.15	35.37

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

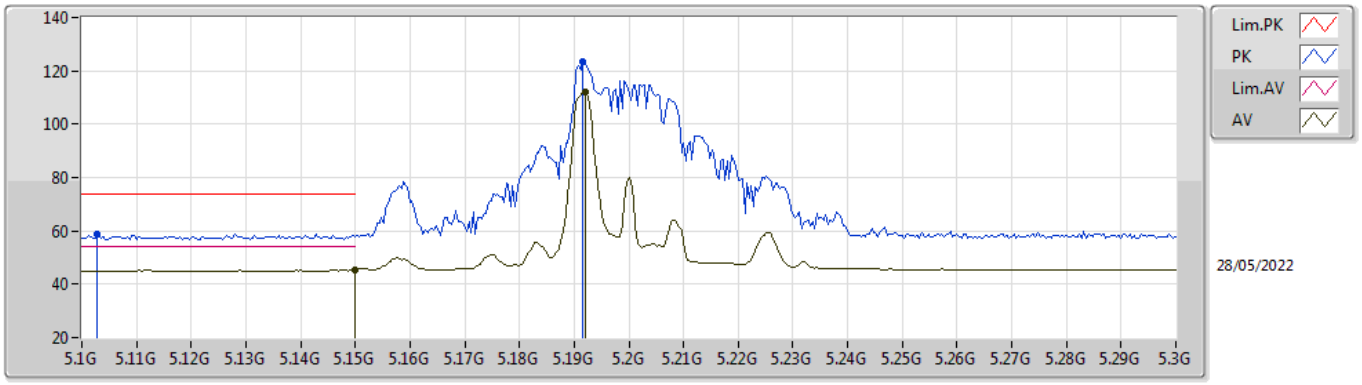


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1028G	58.80	74.00	-15.20	53.07	3	Vertical	178	2.24	-	33.91	7.15	35.33
AV	5.15G	45.32	54.00	-8.68	39.49	3	Vertical	178	2.24	-	34.00	7.17	35.34
PK	5.1916G	123.39	Inf	-Inf	117.36	3	Vertical	178	2.24	-	34.17	7.20	35.34
AV	5.192G	112.07	Inf	-Inf	106.04	3	Vertical	178	2.24	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

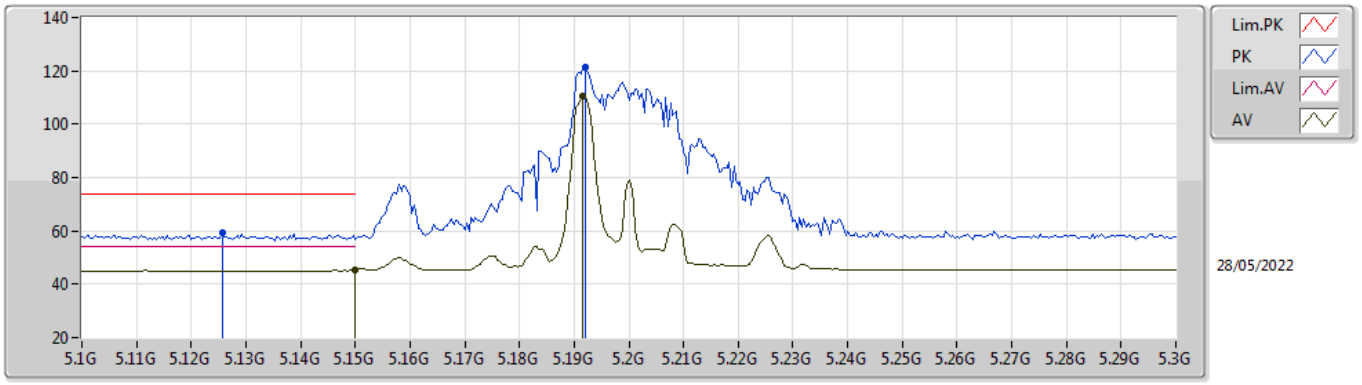


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1256G	59.35	74.00	-14.65	53.58	3	Horizontal	185	2.14	-	33.95	7.16	35.34
AV	5.15G	45.22	54.00	-8.78	39.39	3	Horizontal	185	2.14	-	34.00	7.17	35.34
PK	5.192G	121.35	Inf	-Inf	115.32	3	Horizontal	185	2.14	-	34.17	7.20	35.34
AV	5.1916G	110.34	Inf	-Inf	104.31	3	Horizontal	185	2.14	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

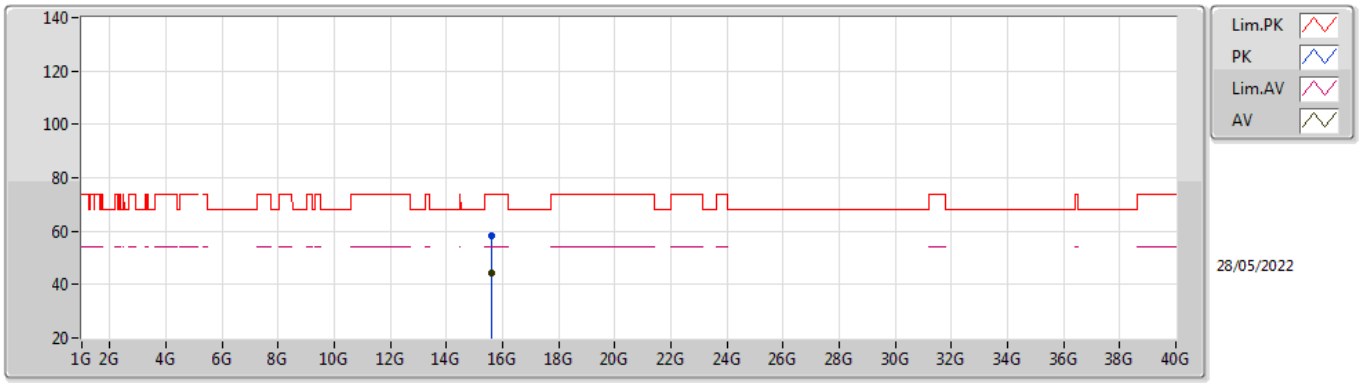


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6054G	58.49	74.00	-15.51	42.78	3	Vertical	5	1.73	-	37.97	13.20	35.46
AV	15.584G	44.17	54.00	-9.83	28.31	3	Vertical	5	1.73	-	38.11	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

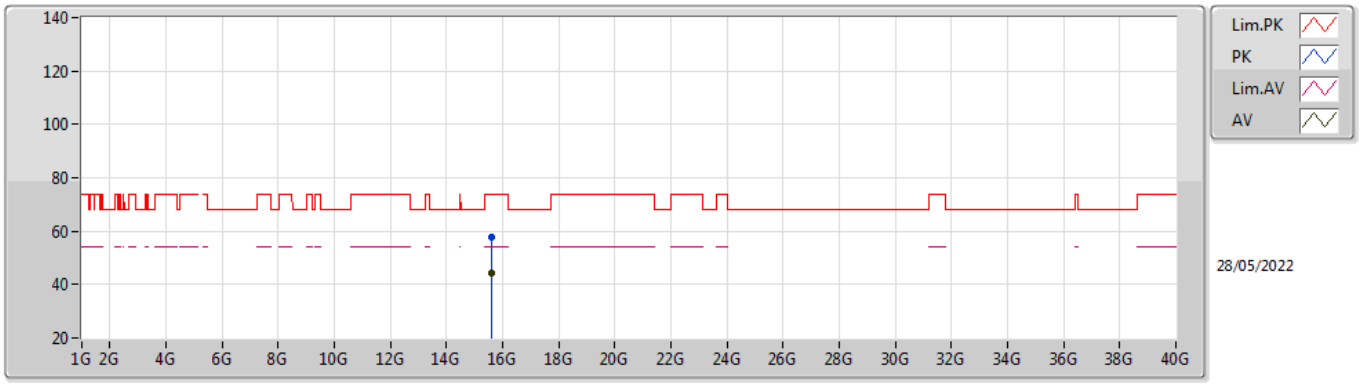


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6016G	57.53	74.00	-16.47	41.80	3	Horizontal	178	2.02	-	37.99	13.20	35.46
AV	15.5982G	44.18	54.00	-9.82	28.42	3	Horizontal	178	2.02	-	38.01	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

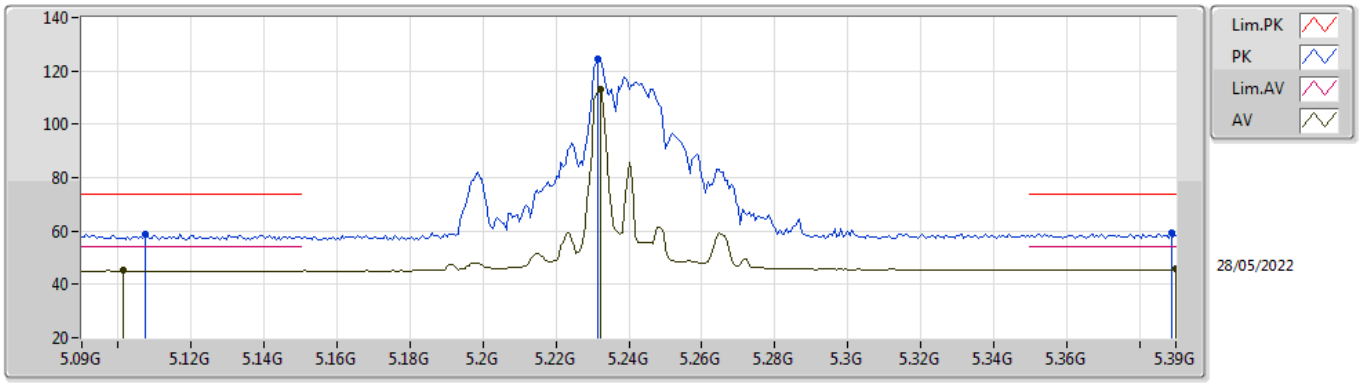


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1074G	58.70	74.00	-15.30	52.97	3	Vertical	177	2.03	-	33.91	7.15	35.33
AV	5.1014G	45.13	54.00	-8.87	39.41	3	Vertical	177	2.03	-	33.90	7.15	35.33
PK	5.2316G	124.48	Inf	-Inf	118.29	3	Vertical	177	2.03	-	34.33	7.20	35.34
AV	5.2322G	113.04	Inf	-Inf	106.85	3	Vertical	177	2.03	-	34.33	7.20	35.34
PK	5.3888G	59.14	74.00	-14.86	52.71	3	Vertical	177	2.03	-	34.58	7.20	35.35
AV	5.39G	45.71	54.00	-8.29	39.28	3	Vertical	177	2.03	-	34.58	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

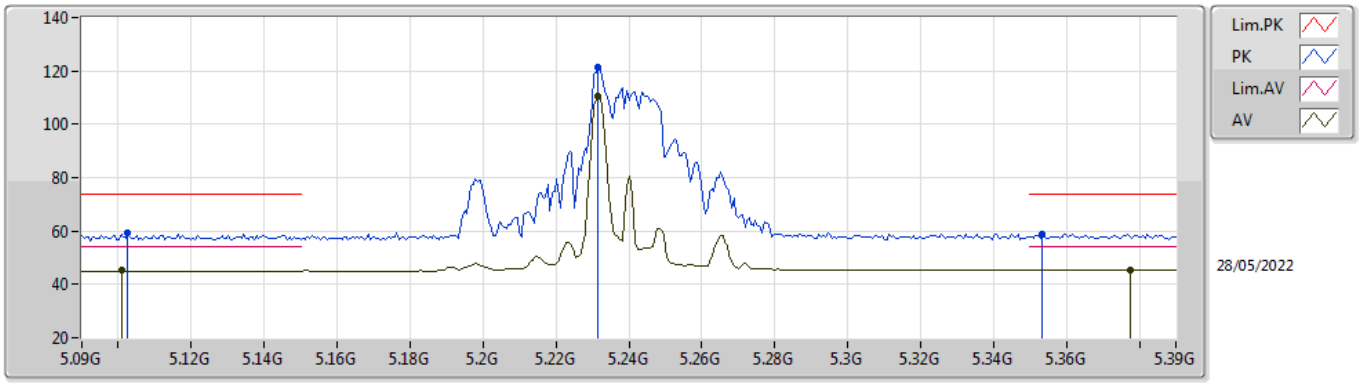


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1026G	59.31	74.00	-14.69	53.58	3	Horizontal	186	2.14	-	33.91	7.15	35.33
AV	5.1008G	45.09	54.00	-8.91	39.37	3	Horizontal	186	2.14	-	33.90	7.15	35.33
PK	5.2316G	121.34	Inf	-Inf	115.15	3	Horizontal	186	2.14	-	34.33	7.20	35.34
AV	5.2316G	110.32	Inf	-Inf	104.13	3	Horizontal	186	2.14	-	34.33	7.20	35.34
PK	5.3534G	58.80	74.00	-15.20	52.43	3	Horizontal	186	2.14	-	34.51	7.20	35.34
AV	5.3774G	45.47	54.00	-8.53	39.07	3	Horizontal	186	2.14	-	34.55	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

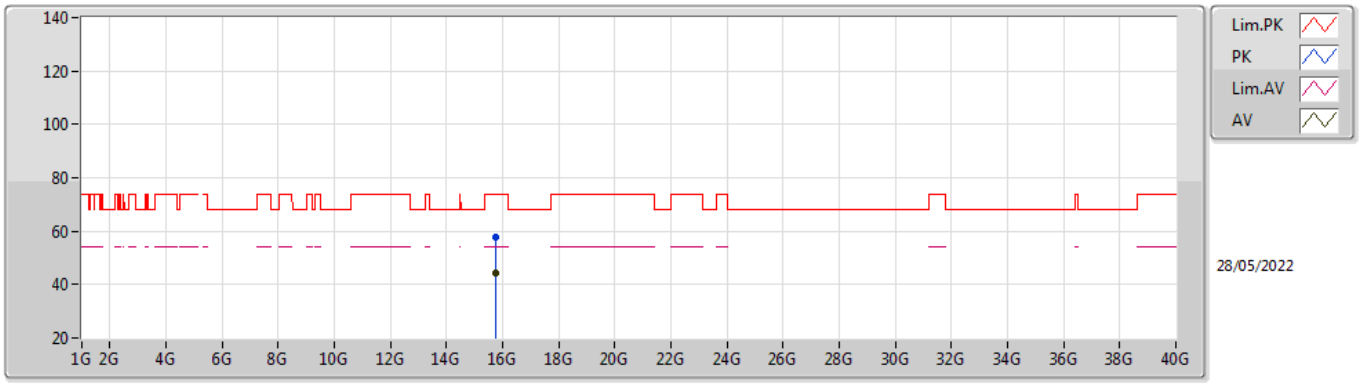


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.768G	57.93	74.00	-16.07	42.48	3	Vertical	22	2.29	-	37.77	13.28	35.60
AV	15.768G	44.20	54.00	-9.80	28.75	3	Vertical	22	2.29	-	37.77	13.28	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

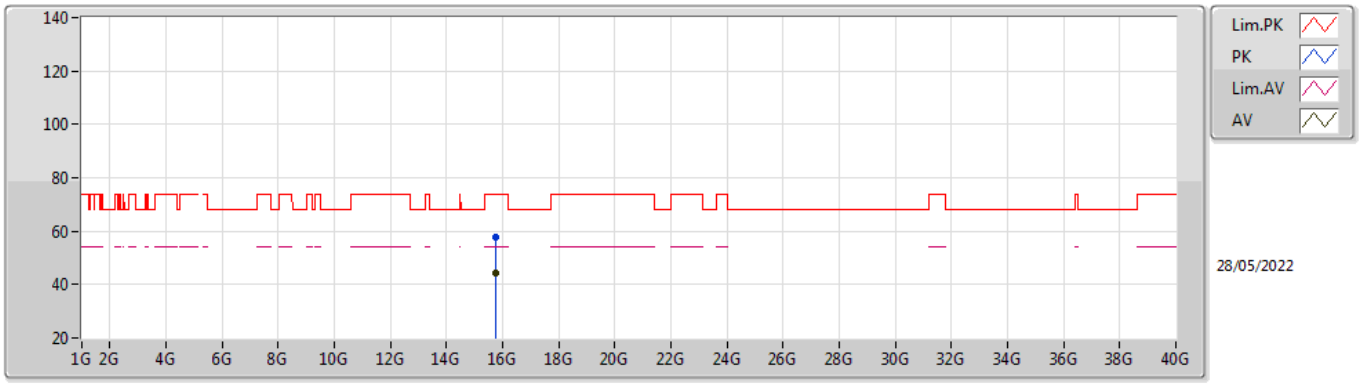


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7402G	58.01	74.00	-15.99	42.65	3	Horizontal	158	2.31	-	37.66	13.27	35.57
AV	15.7626G	44.20	54.00	-9.80	28.76	3	Horizontal	158	2.31	-	37.75	13.28	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

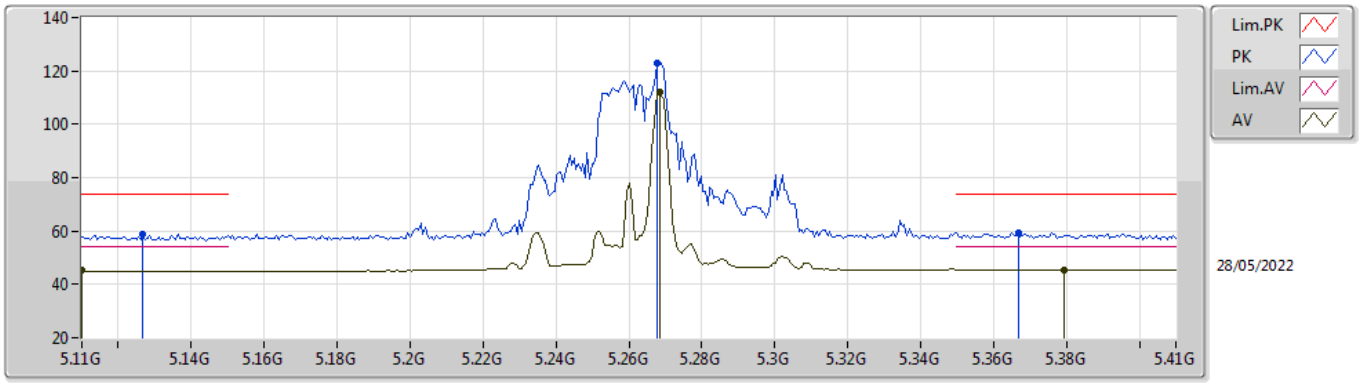


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1268G	58.90	74.00	-15.10	53.13	3	Vertical	180	1.98	-	33.95	7.16	35.34
AV	5.11G	45.23	54.00	-8.77	39.48	3	Vertical	180	1.98	-	33.92	7.16	35.33
PK	5.2678G	123.08	Inf	-Inf	116.78	3	Vertical	180	1.98	-	34.44	7.20	35.34
AV	5.2684G	111.91	Inf	-Inf	105.61	3	Vertical	180	1.98	-	34.44	7.20	35.34
PK	5.3668G	59.25	74.00	-14.75	52.86	3	Vertical	180	1.98	-	34.53	7.20	35.34
AV	5.3794G	45.60	54.00	-8.40	39.19	3	Vertical	180	1.98	-	34.56	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

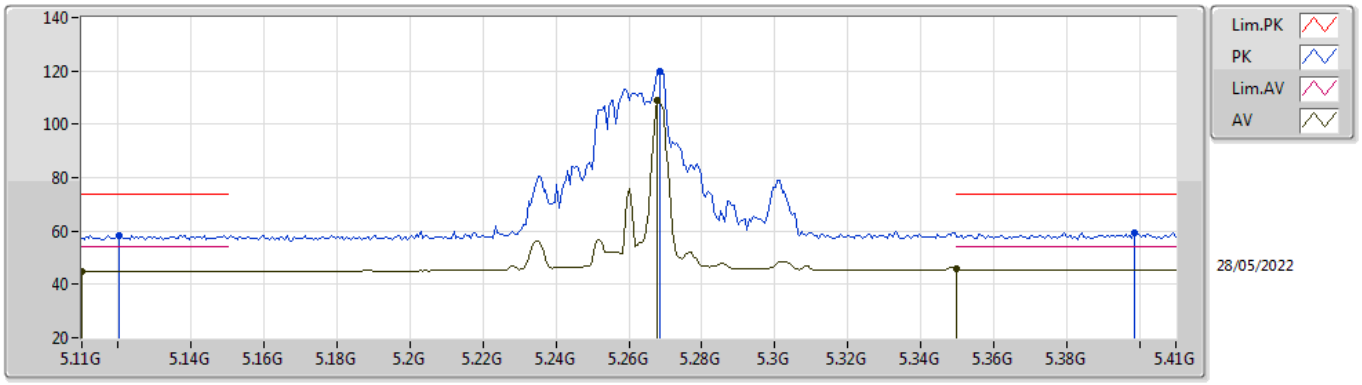


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1202G	58.43	74.00	-15.57	52.66	3	Horizontal	202	2.00	-	33.94	7.16	35.33
AV	5.11G	45.03	54.00	-8.97	39.28	3	Horizontal	202	2.00	-	33.92	7.16	35.33
PK	5.2684G	119.99	Inf	-Inf	113.69	3	Horizontal	202	2.00	-	34.44	7.20	35.34
AV	5.2678G	108.89	Inf	-Inf	102.59	3	Horizontal	202	2.00	-	34.44	7.20	35.34
PK	5.3986G	59.34	74.00	-14.66	52.89	3	Horizontal	202	2.00	-	34.60	7.20	35.35
AV	5.35G	45.63	54.00	-8.37	39.27	3	Horizontal	202	2.00	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

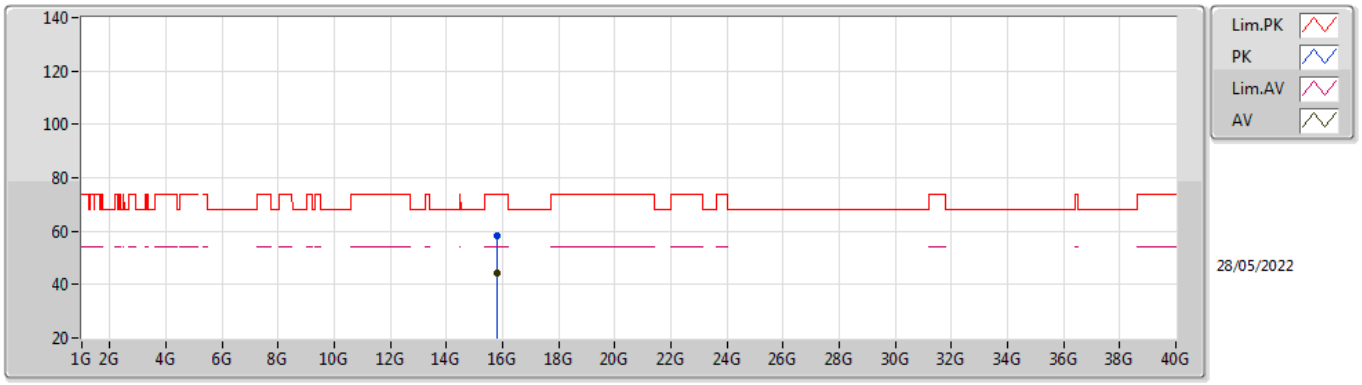


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.8218G	58.21	74.00	-15.79	42.71	3	Vertical	17	1.95	-	37.83	13.31	35.64
AV	15.814G	44.48	54.00	-9.52	28.94	3	Vertical	17	1.95	-	37.86	13.31	35.63

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

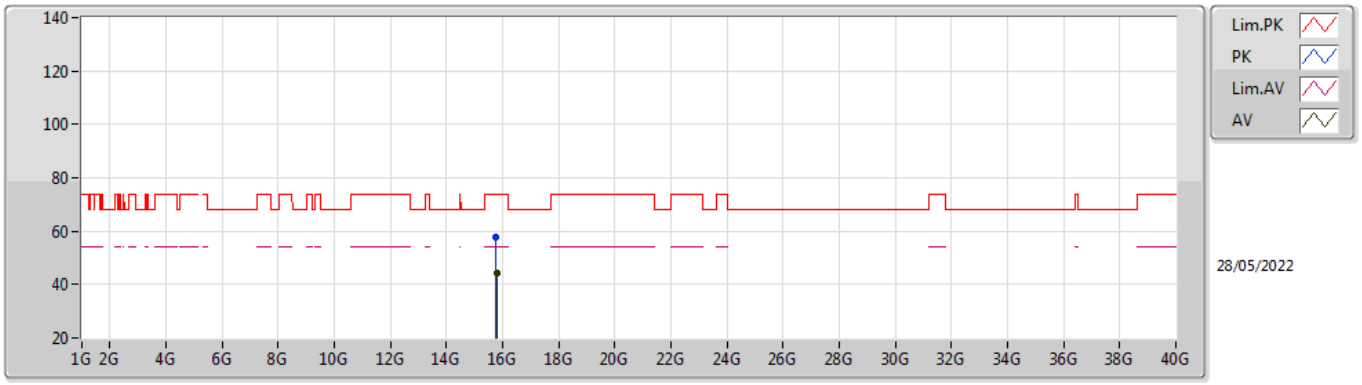


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7706G	57.87	74.00	-16.13	42.40	3	Horizontal	285	2.84	-	37.78	13.29	35.60
AV	15.8126G	44.48	54.00	-9.52	28.94	3	Horizontal	285	2.84	-	37.86	13.31	35.63

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

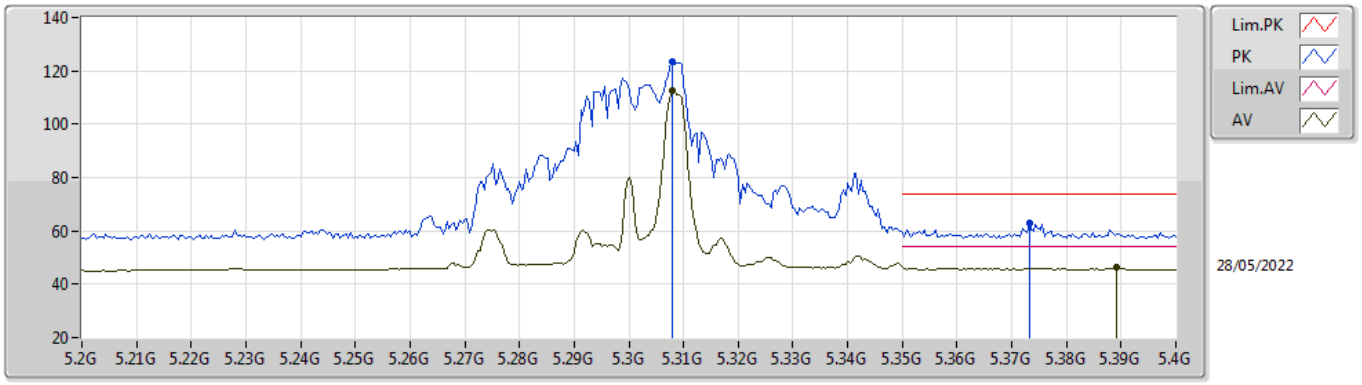


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.308G	123.41	Inf	-Inf	117.05	3	Vertical	181	1.97	-	34.50	7.20	35.34
AV	5.308G	112.56	Inf	-Inf	106.20	3	Vertical	181	1.97	-	34.50	7.20	35.34
PK	5.3732G	62.72	74.00	-11.28	56.31	3	Vertical	181	1.97	-	34.55	7.20	35.34
AV	5.3892G	46.56	54.00	-7.44	40.13	3	Vertical	181	1.97	-	34.58	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

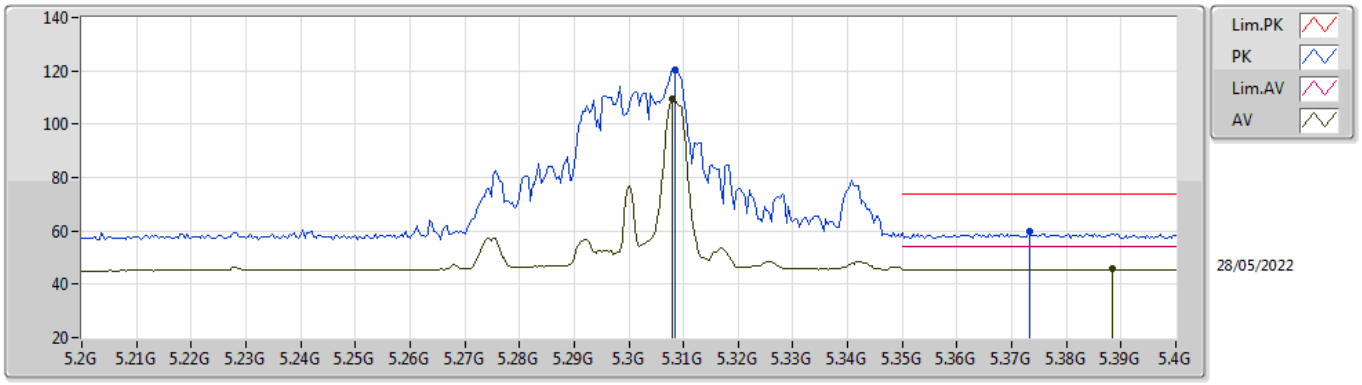


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3084G	120.48	Inf	-Inf	114.12	3	Horizontal	202	2.01	-	34.50	7.20	35.34
AV	5.308G	109.47	Inf	-Inf	103.11	3	Horizontal	202	2.01	-	34.50	7.20	35.34
PK	5.3732G	59.58	74.00	-14.42	53.17	3	Horizontal	202	2.01	-	34.55	7.20	35.34
AV	5.3884G	45.83	54.00	-8.17	39.40	3	Horizontal	202	2.01	-	34.58	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

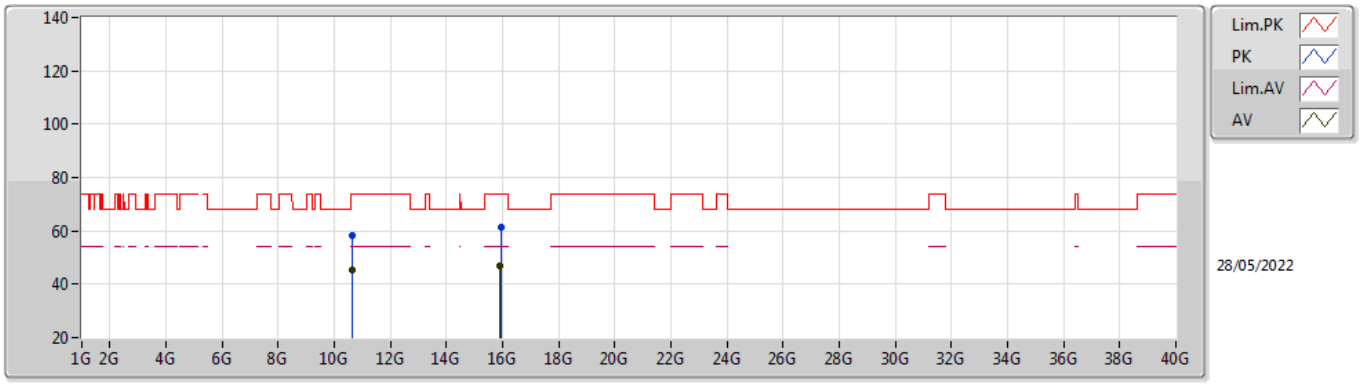


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6164G	58.08	74.00	-15.92	44.63	3	Vertical	204	1.79	-	38.23	10.59	35.37
AV	10.6166G	45.39	54.00	-8.61	31.94	3	Vertical	204	1.79	-	38.23	10.59	35.37
PK	15.9272G	61.30	74.00	-12.70	46.12	3	Vertical	199	3.00	-	37.55	13.36	35.73
AV	15.9248G	47.07	54.00	-6.93	31.89	3	Vertical	199	3.00	-	37.55	13.36	35.73

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

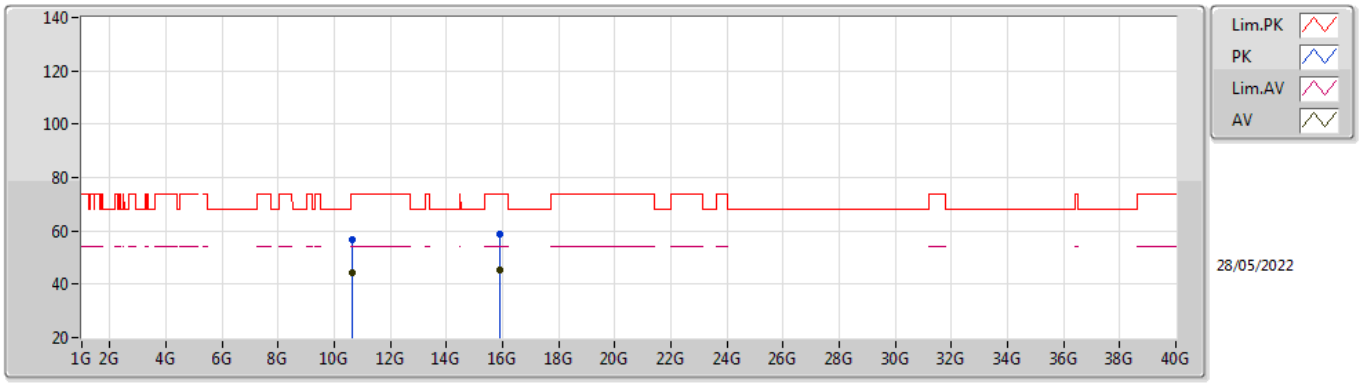


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6174G	56.91	74.00	-17.09	43.46	3	Horizontal	144	1.80	-	38.23	10.59	35.37
AV	10.617G	44.17	54.00	-9.83	30.72	3	Horizontal	144	1.80	-	38.23	10.59	35.37
PK	15.8952G	58.66	74.00	-15.34	43.40	3	Horizontal	282	1.80	-	37.61	13.35	35.70
AV	15.9246G	45.38	54.00	-8.62	30.20	3	Horizontal	282	1.80	-	37.55	13.36	35.73

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

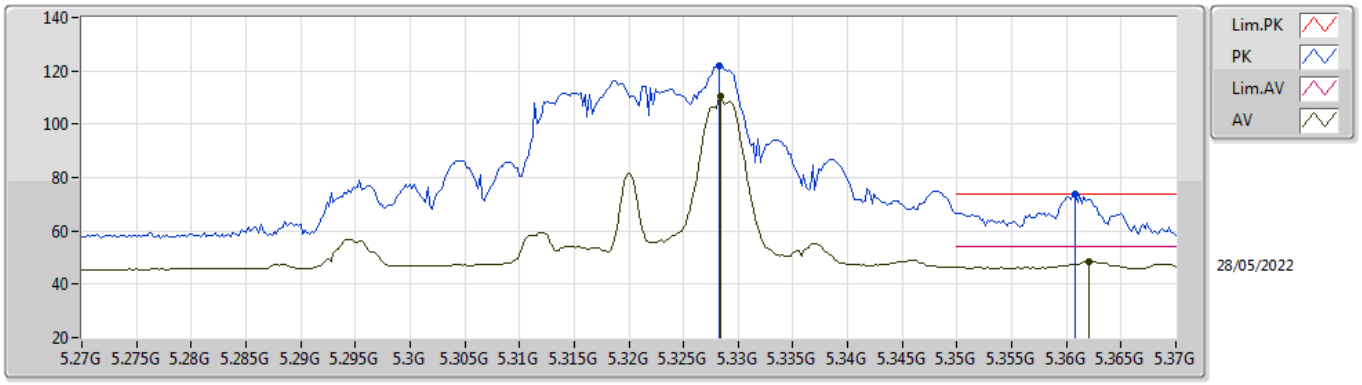


EUT X_2TX
Setting 17.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3282G	121.79	Inf	-Inf	115.43	3	Vertical	177	1.80	-	34.50	7.20	35.34
AV	5.3284G	110.36	Inf	-Inf	104.00	3	Vertical	177	1.80	-	34.50	7.20	35.34
PK	5.3608G	73.59	74.00	-0.41	67.21	3	Vertical	177	1.80	-	34.52	7.20	35.34
AV	5.362G	48.66	54.00	-5.34	42.28	3	Vertical	177	1.80	-	34.52	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

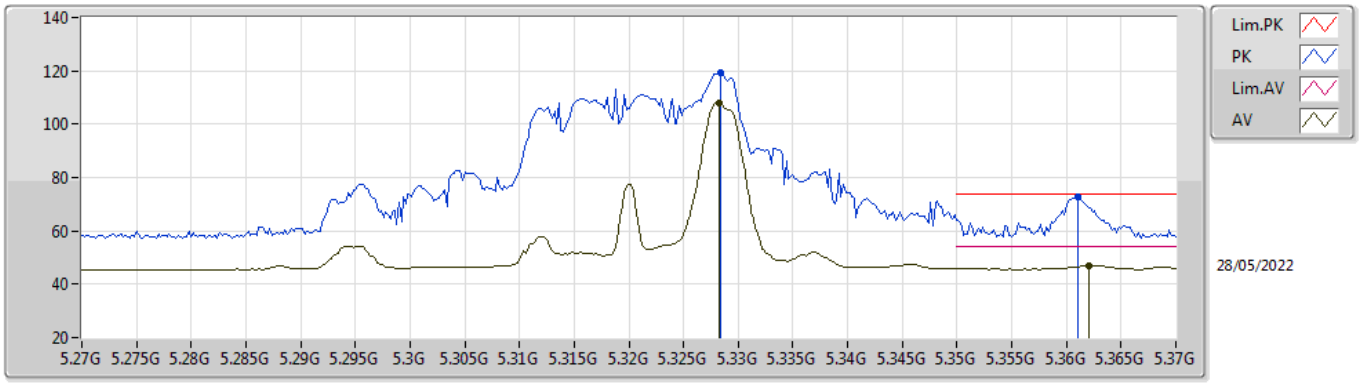


EUT X_2TX
Setting 17.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3284G	119.26	Inf	-Inf	112.90	3	Horizontal	201	1.99	-	34.50	7.20	35.34
AV	5.3282G	107.78	Inf	-Inf	101.42	3	Horizontal	201	1.99	-	34.50	7.20	35.34
PK	5.361G	72.82	74.00	-1.18	66.44	3	Horizontal	201	1.99	-	34.52	7.20	35.34
AV	5.362G	46.99	54.00	-7.01	40.61	3	Horizontal	201	1.99	-	34.52	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

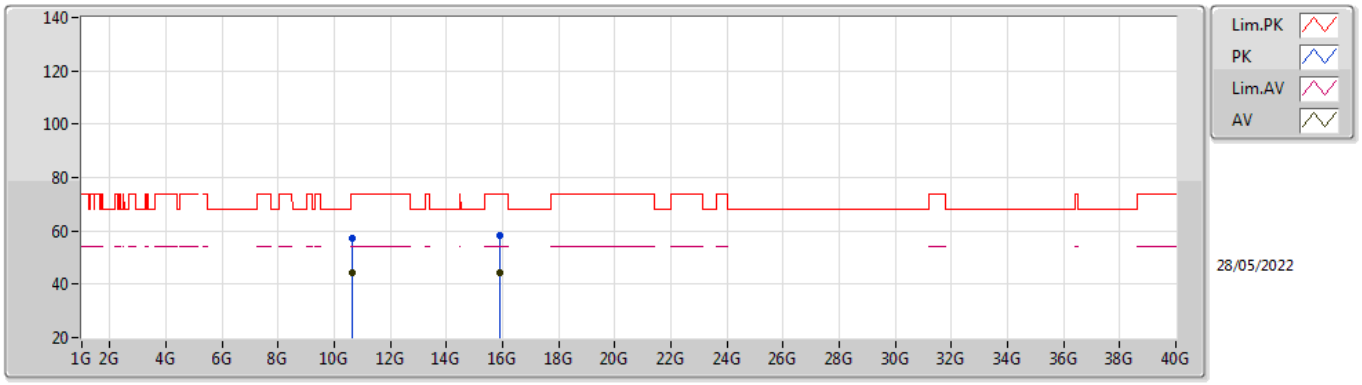


EUT X_2TX
Setting 17.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6562G	57.41	74.00	-16.59	43.84	3	Vertical	56	2.11	-	38.31	10.60	35.34
AV	10.6566G	44.11	54.00	-9.89	30.54	3	Vertical	56	2.11	-	38.31	10.60	35.34
PK	15.9156G	58.16	74.00	-15.84	42.95	3	Vertical	6	1.93	-	37.57	13.36	35.72
AV	15.9116G	44.51	54.00	-9.49	29.29	3	Vertical	6	1.93	-	37.58	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

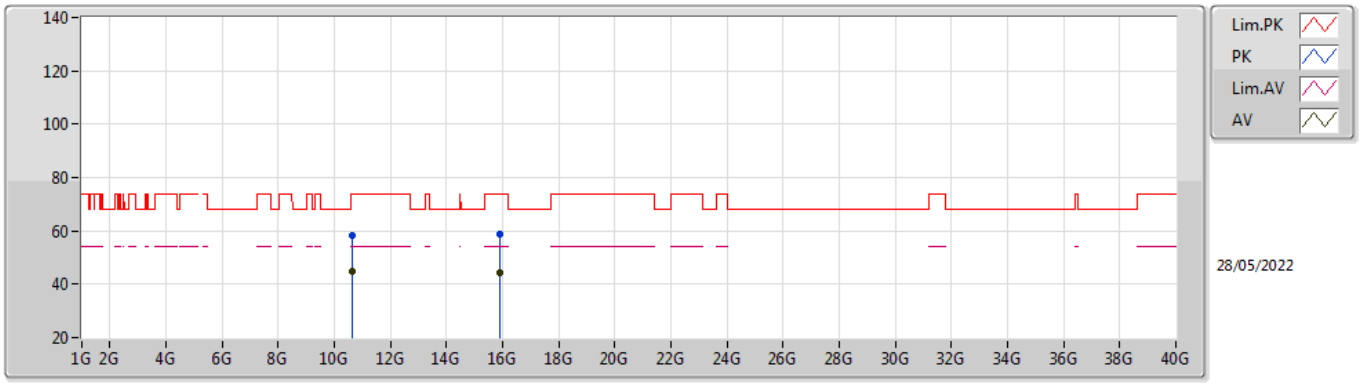


EUT X_2TX
Setting 17.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6572G	58.47	74.00	-15.53	44.89	3	Horizontal	142	2.09	-	38.31	10.60	35.33
AV	10.657G	44.90	54.00	-9.10	31.32	3	Horizontal	142	2.09	-	38.31	10.60	35.33
PK	15.9114G	58.56	74.00	-15.44	43.34	3	Horizontal	158	1.56	-	37.58	13.36	35.72
AV	15.9134G	44.47	54.00	-9.53	29.26	3	Horizontal	158	1.56	-	37.57	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

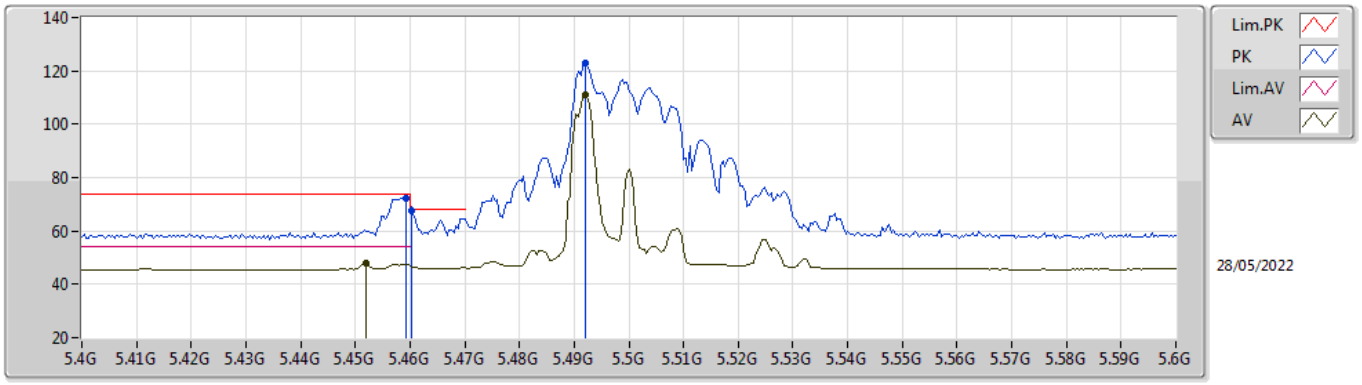


EUT X_2TX
Setting 19.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4592G	72.32	74.00	-1.68	65.89	3	Vertical	178	1.88	-	34.52	7.26	35.35
AV	5.452G	47.93	54.00	-6.07	41.53	3	Vertical	178	1.88	-	34.50	7.25	35.35
PK	5.4604G	67.37	68.20	-0.83	60.94	3	Vertical	178	1.88	-	34.52	7.26	35.35
PK	5.492G	122.90	Inf	-Inf	116.38	3	Vertical	178	1.88	-	34.58	7.29	35.35
AV	5.492G	110.85	Inf	-Inf	104.33	3	Vertical	178	1.88	-	34.58	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

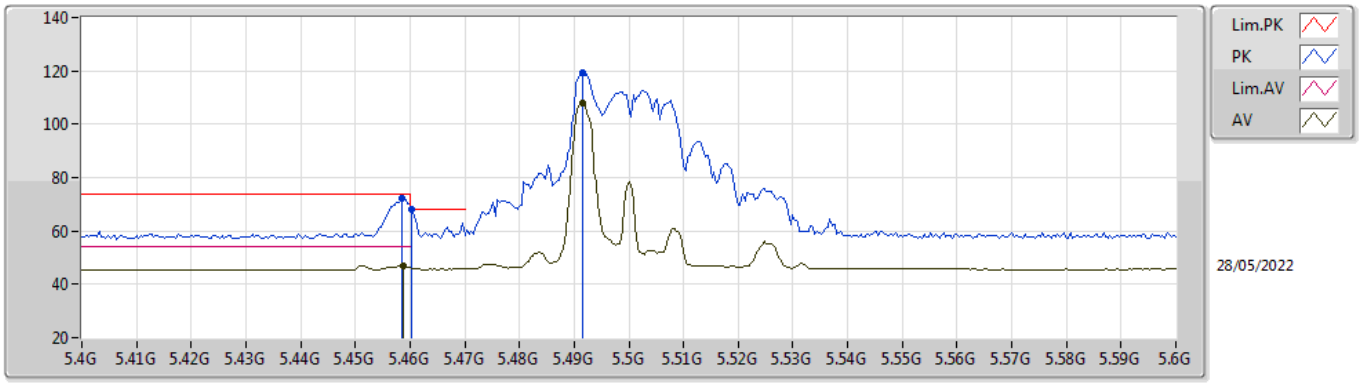


EUT X_2TX
Setting 19.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4584G	72.23	74.00	-1.77	65.80	3	Horizontal	186	2.91	-	34.52	7.26	35.35
AV	5.4588G	46.87	54.00	-7.13	40.44	3	Horizontal	186	2.91	-	34.52	7.26	35.35
PK	5.4604G	67.92	68.20	-0.28	61.49	3	Horizontal	186	2.91	-	34.52	7.26	35.35
PK	5.4916G	119.53	Inf	-Inf	113.01	3	Horizontal	186	2.91	-	34.58	7.29	35.35
AV	5.4916G	107.86	Inf	-Inf	101.34	3	Horizontal	186	2.91	-	34.58	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

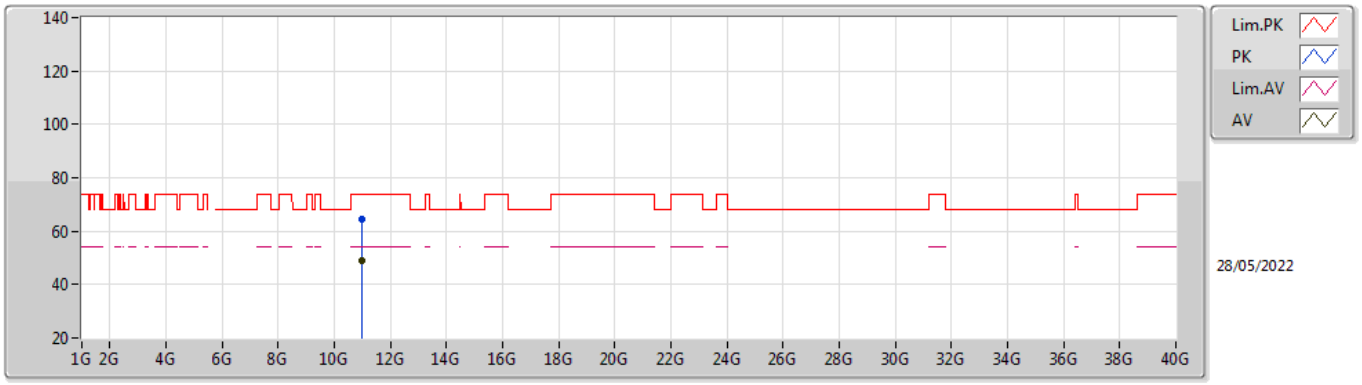


EUT X_2TX
Setting 19.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.984G	64.51	74.00	-9.49	50.53	3	Vertical	175	3.00	-	38.38	10.65	35.05
AV	10.984G	49.18	54.00	-4.82	35.20	3	Vertical	175	3.00	-	38.38	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

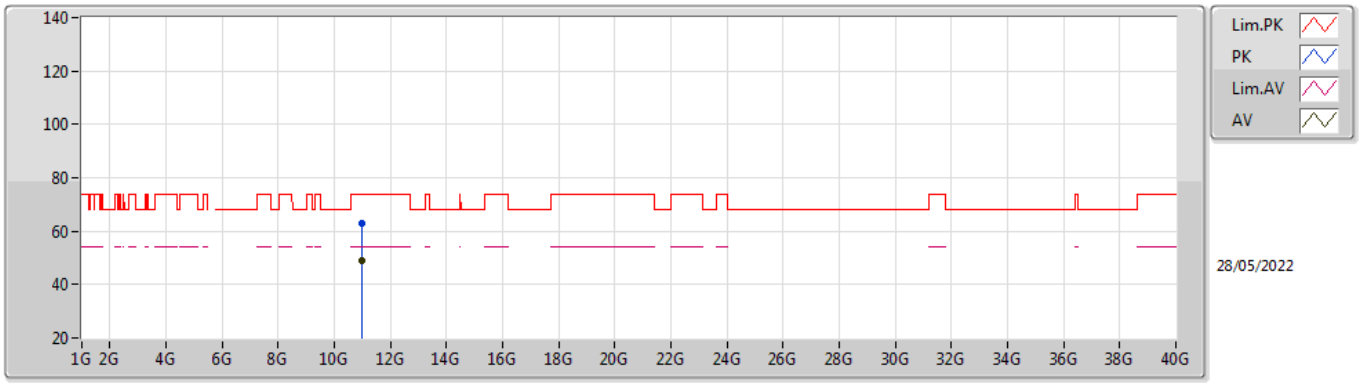


EUT X_2TX
Setting 19.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9824G	62.73	74.00	-11.27	48.76	3	Horizontal	265	2.84	-	38.38	10.65	35.06
AV	10.9826G	49.03	54.00	-4.97	35.05	3	Horizontal	265	2.84	-	38.38	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

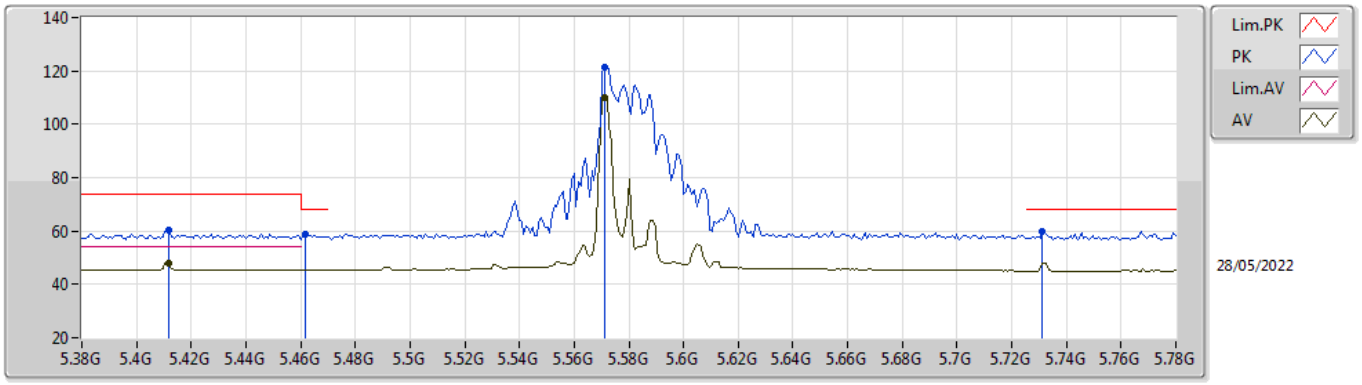


EUT X_2TX
Setting 18.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.412G	60.24	74.00	-13.76	53.80	3	Vertical	175	1.80	-	34.58	7.21	35.35
AV	5.412G	48.02	54.00	-5.98	41.58	3	Vertical	175	1.80	-	34.58	7.21	35.35
PK	5.4616G	58.78	68.20	-9.42	52.35	3	Vertical	175	1.80	-	34.52	7.26	35.35
PK	5.5712G	121.52	Inf	-Inf	114.94	3	Vertical	175	1.80	-	34.60	7.37	35.39
AV	5.5712G	110.17	Inf	-Inf	103.59	3	Vertical	175	1.80	-	34.60	7.37	35.39
PK	5.7312G	59.80	68.20	-8.40	53.63	3	Vertical	175	1.80	-	34.24	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

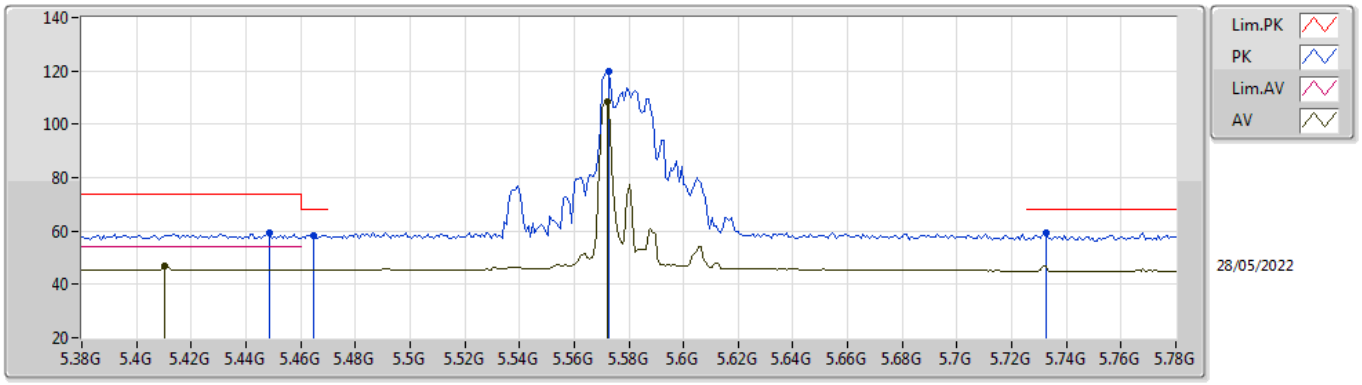


EUT X_2TX
Setting 18.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4488G	59.30	74.00	-14.70	52.90	3	Horizontal	193	2.97	-	34.50	7.25	35.35
AV	5.4104G	46.76	54.00	-7.24	40.32	3	Horizontal	193	2.97	-	34.58	7.21	35.35
PK	5.4648G	58.36	68.20	-9.84	51.92	3	Horizontal	193	2.97	-	34.53	7.26	35.35
PK	5.5728G	119.67	Inf	-Inf	113.09	3	Horizontal	193	2.97	-	34.60	7.37	35.39
AV	5.572G	108.53	Inf	-Inf	101.95	3	Horizontal	193	2.97	-	34.60	7.37	35.39
PK	5.7328G	59.29	68.20	-8.91	53.13	3	Horizontal	193	2.97	-	34.23	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

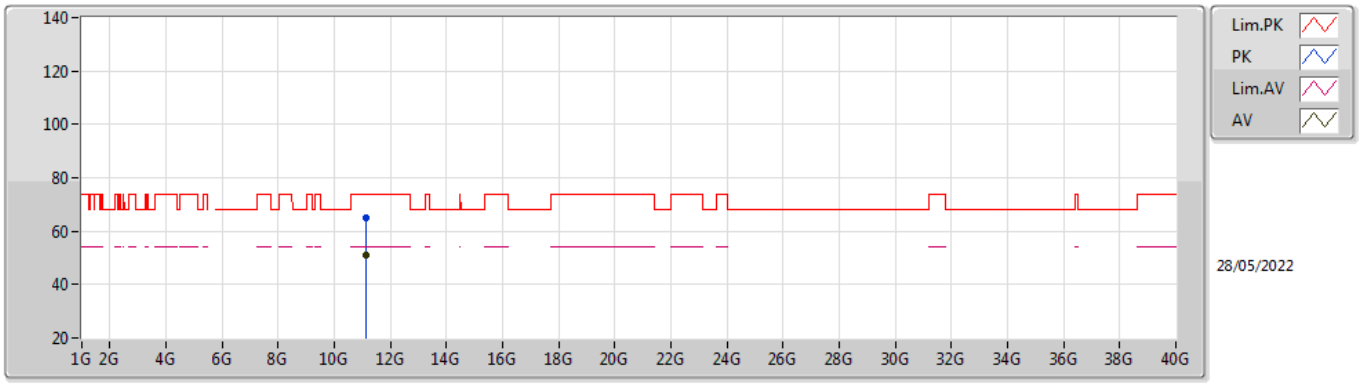


EUT X_2TX
Setting 18.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.144G	65.08	74.00	-8.92	51.07	3	Vertical	167	2.84	-	38.54	10.67	35.20
AV	11.144G	51.27	54.00	-2.73	37.26	3	Vertical	167	2.84	-	38.54	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

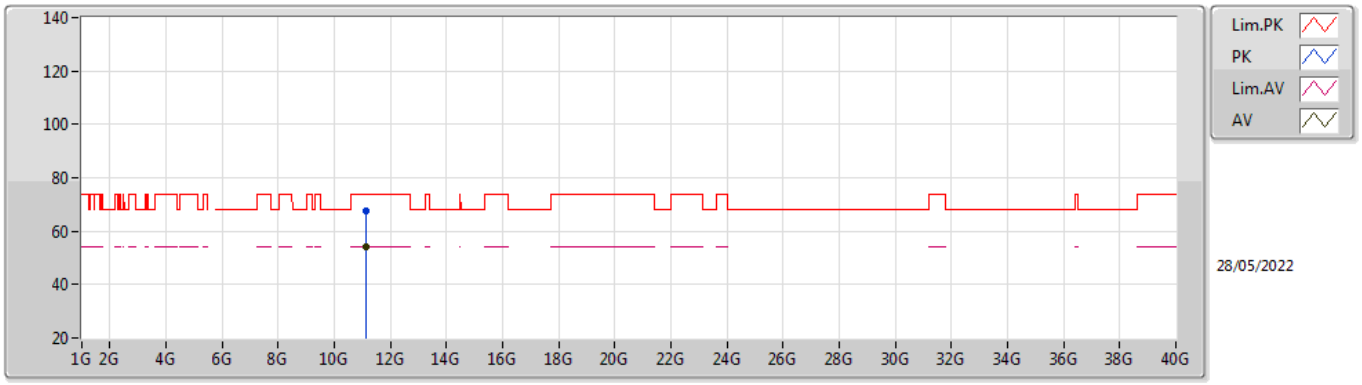


EUT X_2TX
Setting 18.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1422G	67.61	74.00	-6.39	53.60	3	Horizontal	135	2.08	-	38.54	10.67	35.20
AV	11.1428G	53.90	54.00	-0.10	39.89	3	Horizontal	135	2.08	-	38.54	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

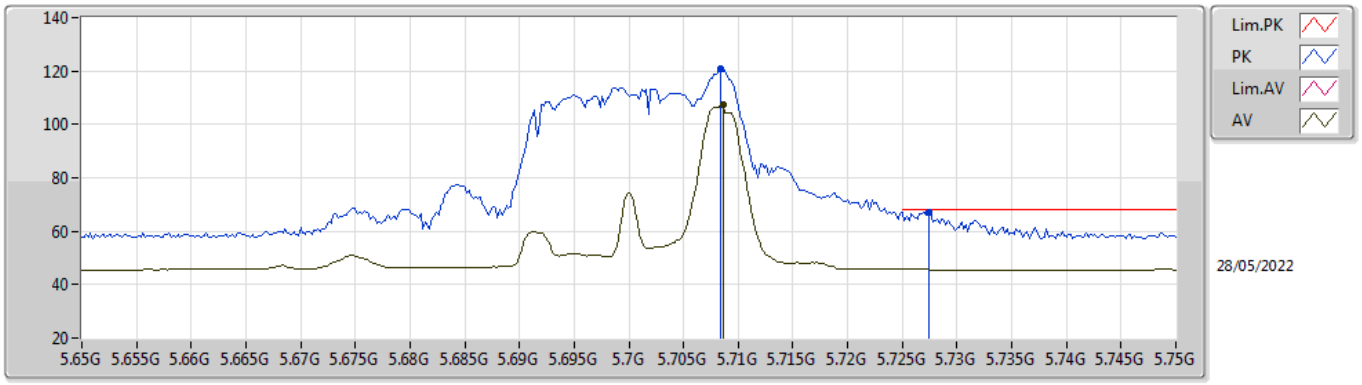


EUT X_2TX
Setting 16
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7084G	121.07	Inf	-Inf	114.84	3	Vertical	176	1.65	-	34.28	7.40	35.45
AV	5.7086G	107.46	Inf	-Inf	101.23	3	Vertical	176	1.65	-	34.28	7.40	35.45
PK	5.7274G	67.25	68.20	-0.95	61.06	3	Vertical	176	1.65	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

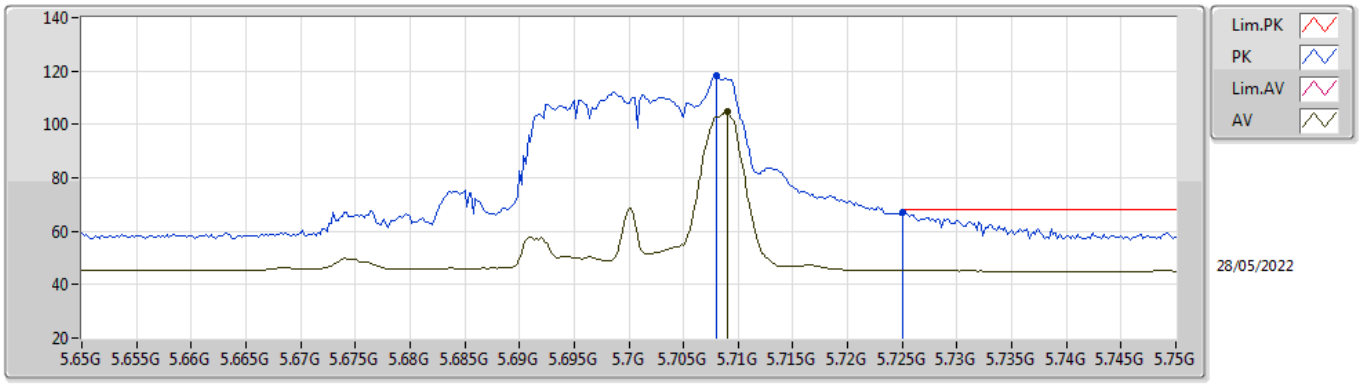


EUT X_2TX
Setting 16
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.708G	118.10	Inf	-Inf	111.87	3	Horizontal	183	3.00	-	34.28	7.40	35.45
AV	5.709G	104.66	Inf	-Inf	98.43	3	Horizontal	183	3.00	-	34.28	7.40	35.45
PK	5.725G	67.06	68.20	-1.14	60.87	3	Horizontal	183	3.00	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

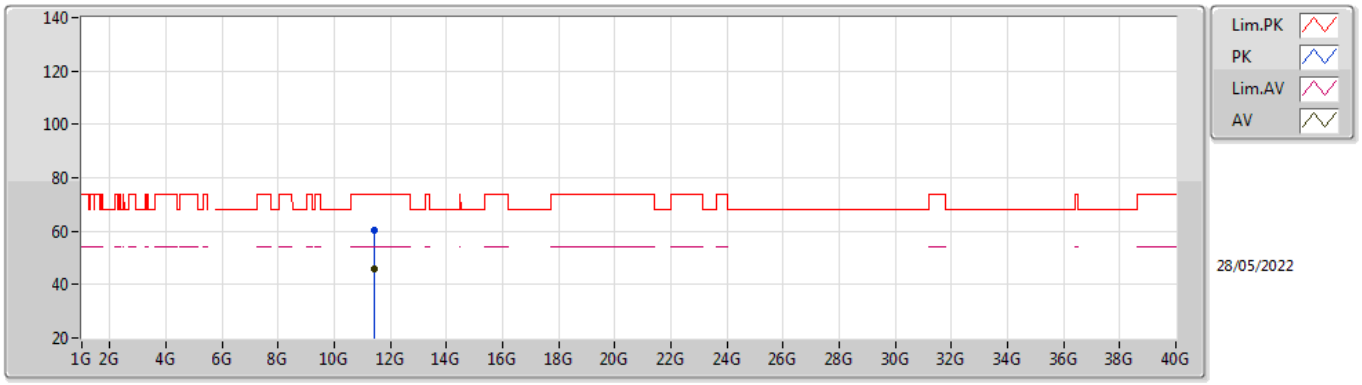


EUT X_2TX
Setting 16
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4178G	60.48	74.00	-13.52	46.44	3	Vertical	203	2.59	-	38.84	10.71	35.51
AV	11.4172G	45.62	54.00	-8.38	31.59	3	Vertical	203	2.59	-	38.83	10.71	35.51

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

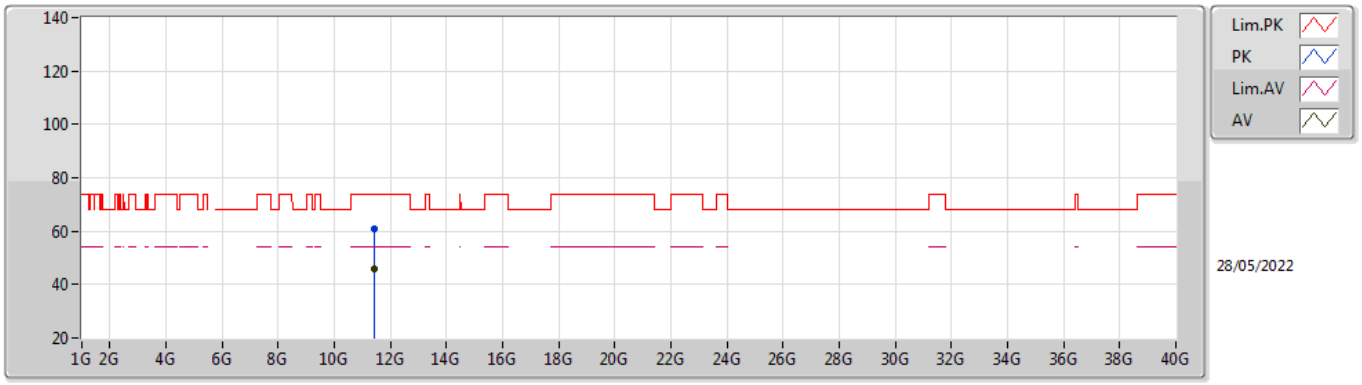


EUT X_2TX
Setting 16
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4178G	60.68	74.00	-13.32	46.64	3	Horizontal	54	1.71	-	38.84	10.71	35.51
AV	11.4174G	45.95	54.00	-8.05	31.92	3	Horizontal	54	1.71	-	38.83	10.71	35.51

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

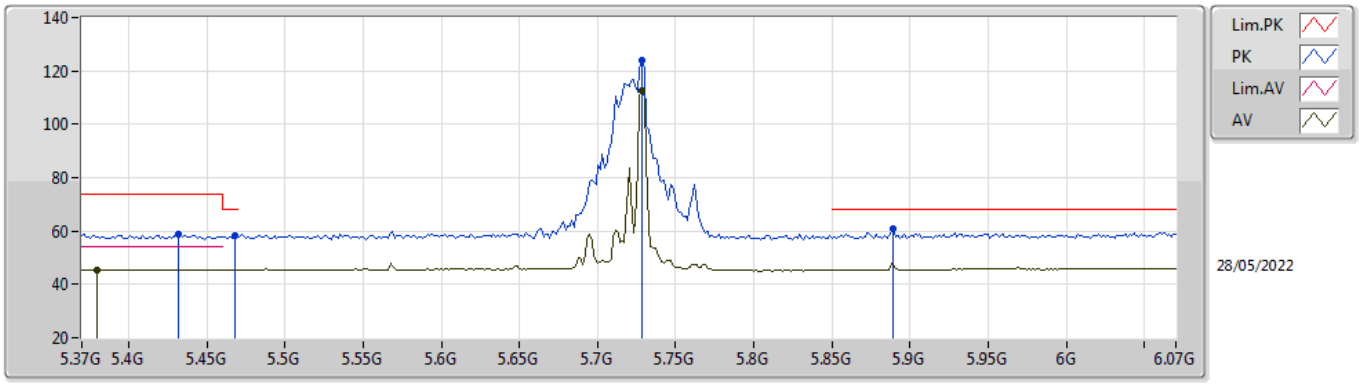


EUT X_2TX
Setting 20.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4316G	58.73	74.00	-15.27	52.31	3	Vertical	176	1.73	-	34.54	7.23	35.35
AV	5.3798G	45.51	54.00	-8.49	39.10	3	Vertical	176	1.73	-	34.56	7.20	35.35
PK	5.468G	58.13	68.20	-10.07	51.67	3	Vertical	176	1.73	-	34.54	7.27	35.35
PK	5.7284G	123.79	Inf	-Inf	117.61	3	Vertical	176	1.73	-	34.24	7.40	35.46
AV	5.7284G	112.70	Inf	-Inf	106.52	3	Vertical	176	1.73	-	34.24	7.40	35.46
PK	5.8894G	60.63	68.20	-7.57	54.14	3	Vertical	176	1.73	-	34.54	7.49	35.54

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

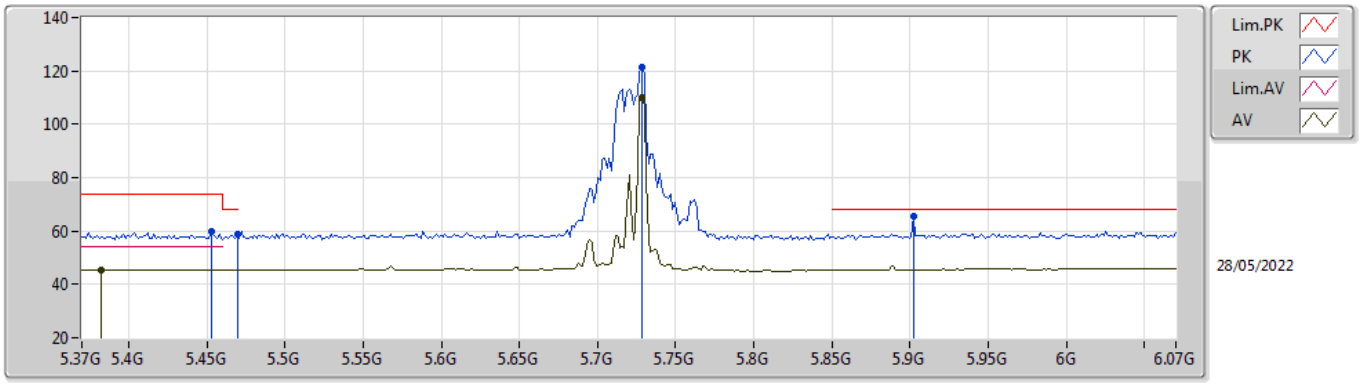


EUT X_2TX
Setting 20.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4526G	59.57	74.00	-14.43	53.16	3	Horizontal	185	2.96	-	34.51	7.25	35.35
AV	5.3826G	45.42	54.00	-8.58	39.00	3	Horizontal	185	2.96	-	34.57	7.20	35.35
PK	5.4694G	58.59	68.20	-9.61	52.13	3	Horizontal	185	2.96	-	34.54	7.27	35.35
PK	5.7284G	121.41	Inf	-Inf	115.23	3	Horizontal	185	2.96	-	34.24	7.40	35.46
AV	5.7284G	110.04	Inf	-Inf	103.86	3	Horizontal	185	2.96	-	34.24	7.40	35.46
PK	5.902G	65.75	68.20	-2.45	59.19	3	Horizontal	185	2.96	-	34.61	7.50	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

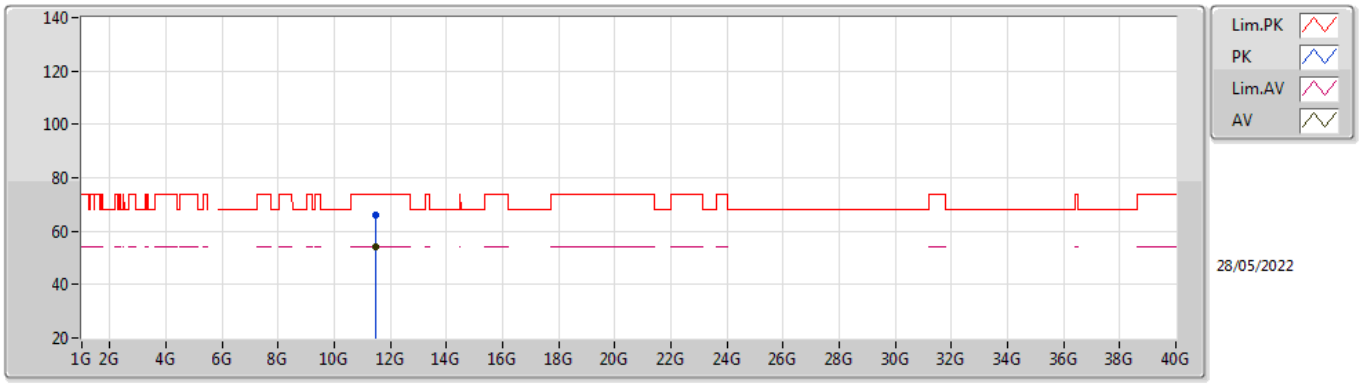


EUT X_2TX
Setting 20.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4568G	65.81	74.00	-8.19	51.73	3	Vertical	199	1.00	-	38.91	10.72	35.55
AV	11.4572G	53.98	54.00	-0.02	39.90	3	Vertical	199	1.00	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

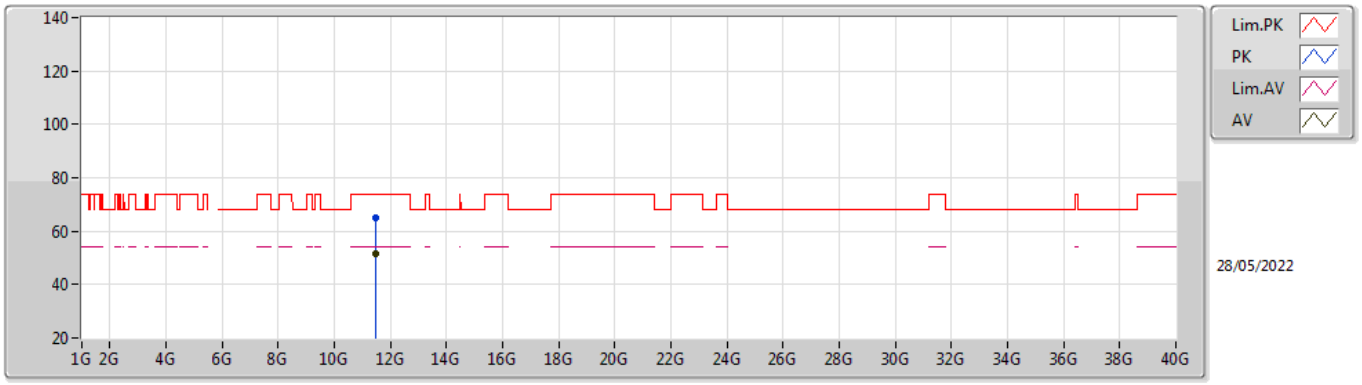


EUT X_2TX
Setting 20.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4576G	64.81	74.00	-9.19	50.72	3	Horizontal	138	2.01	-	38.92	10.72	35.55
AV	11.4574G	51.42	54.00	-2.58	37.34	3	Horizontal	138	2.01	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

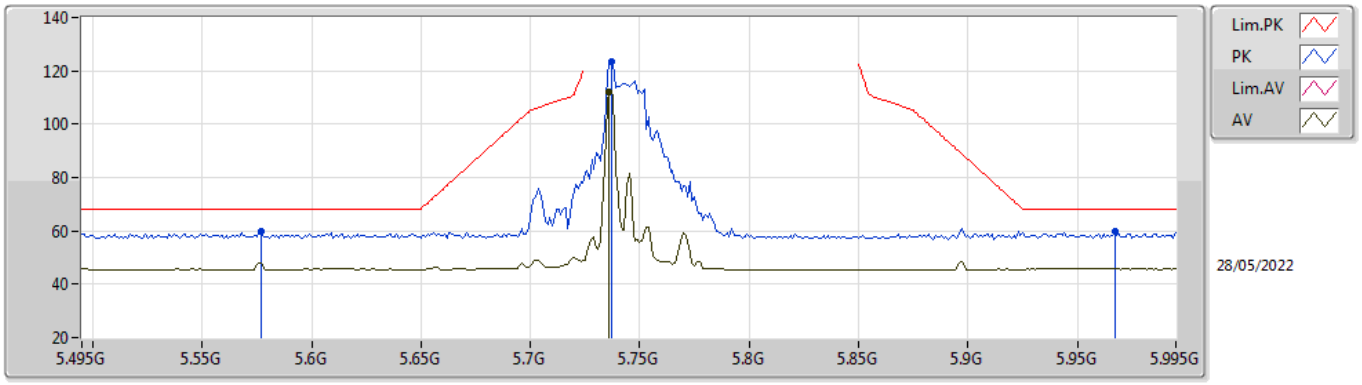


EUT X_2TX
Setting 21
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.577G	59.68	68.20	-8.52	53.09	3	Vertical	175	1.73	-	34.60	7.38	35.39
PK	5.737G	123.52	Inf	-Inf	117.36	3	Vertical	175	1.73	-	34.23	7.40	35.47
AV	5.736G	112.28	Inf	-Inf	106.12	3	Vertical	175	1.73	-	34.23	7.40	35.47
PK	5.967G	59.85	68.20	-8.35	53.06	3	Vertical	175	1.73	-	34.80	7.57	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

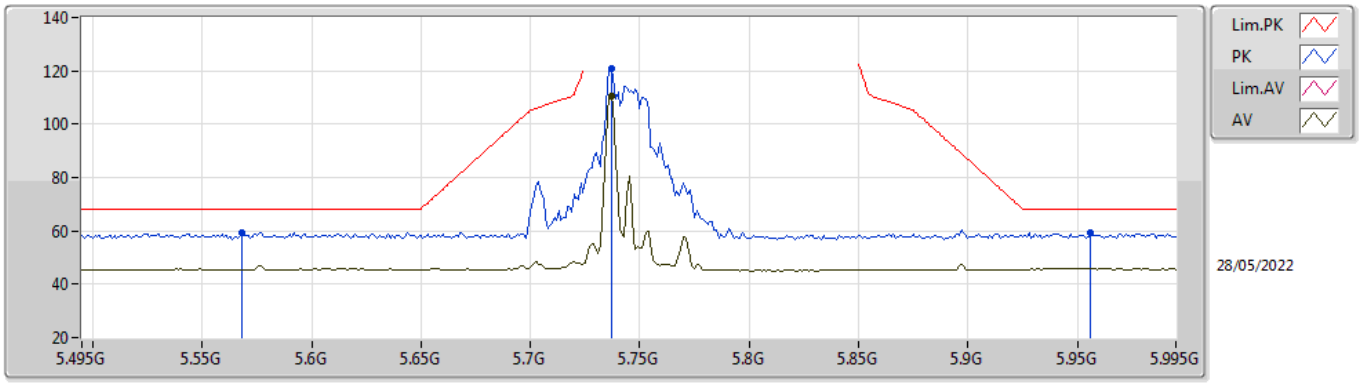


EUT X_2TX
Setting 21
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.568G	59.40	68.20	-8.80	52.81	3	Horizontal	185	2.97	-	34.60	7.37	35.38
PK	5.737G	121.02	Inf	-Inf	114.86	3	Horizontal	185	2.97	-	34.23	7.40	35.47
AV	5.737G	110.37	Inf	-Inf	104.21	3	Horizontal	185	2.97	-	34.23	7.40	35.47
PK	5.956G	59.41	68.20	-8.79	52.63	3	Horizontal	185	2.97	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

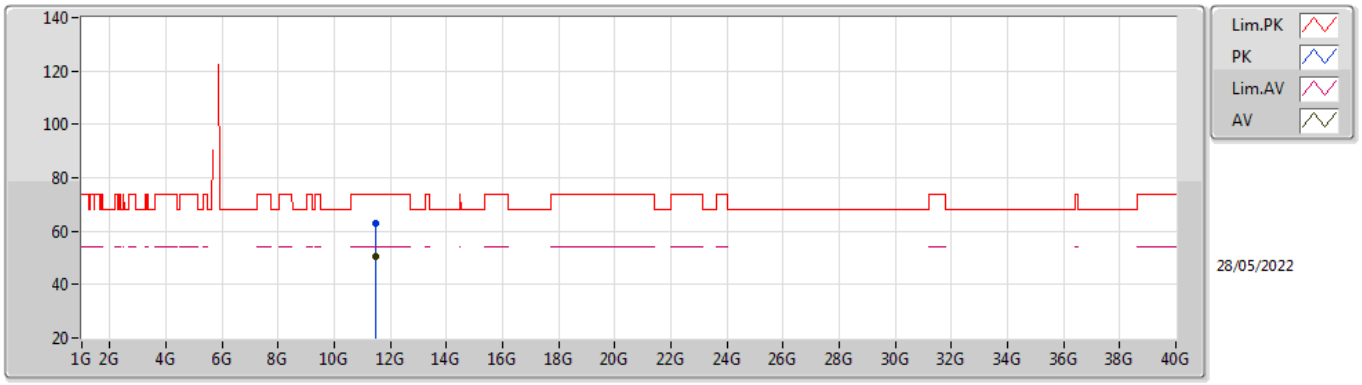


EUT X_2TX
Setting 21
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.472G	62.87	74.00	-11.13	48.78	3	Vertical	204	2.97	-	38.94	10.72	35.57
AV	11.473G	50.50	54.00	-3.50	36.40	3	Vertical	204	2.97	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

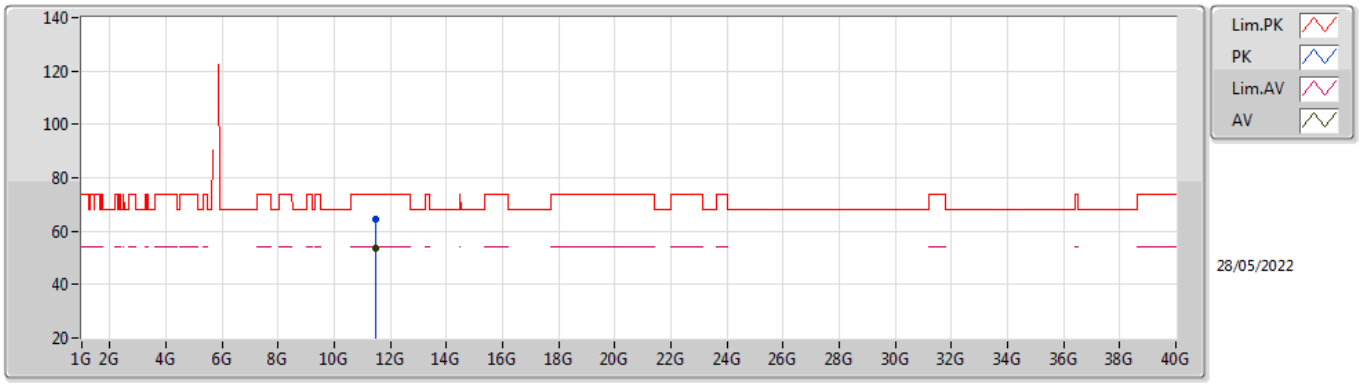


EUT X_2TX
Setting 21
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.473G	64.43	74.00	-9.57	50.33	3	Horizontal	139	2.09	-	38.95	10.72	35.57
AV	11.473G	53.79	54.00	-0.21	39.69	3	Horizontal	139	2.09	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

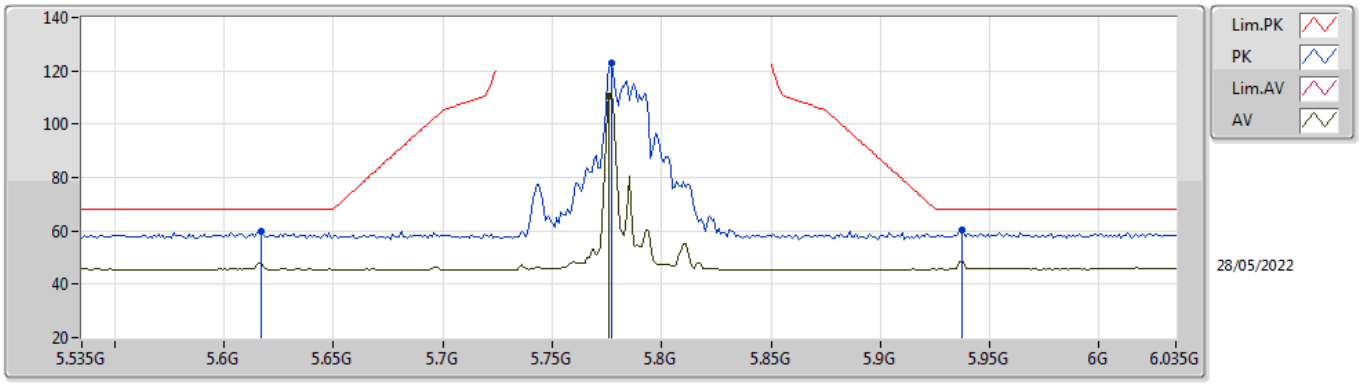


EUT X_2TX
Setting 19.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.617G	59.88	68.20	-8.32	53.32	3	Vertical	177	1.80	-	34.57	7.40	35.41
PK	5.777G	122.73	Inf	-Inf	116.62	3	Vertical	177	1.80	-	34.20	7.40	35.49
AV	5.776G	110.64	Inf	-Inf	104.53	3	Vertical	177	1.80	-	34.20	7.40	35.49
PK	5.937G	60.49	68.20	-7.71	53.77	3	Vertical	177	1.80	-	34.75	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

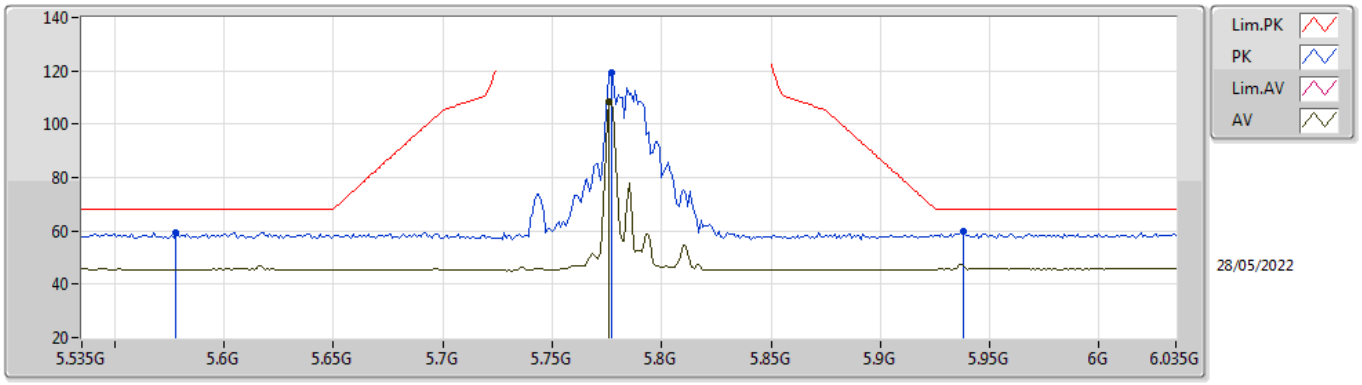


EUT X_2TX
Setting 19.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.578G	59.19	68.20	-9.01	52.60	3	Horizontal	188	3.00	-	34.60	7.38	35.39
PK	5.777G	119.44	Inf	-Inf	113.33	3	Horizontal	188	3.00	-	34.20	7.40	35.49
AV	5.776G	108.41	Inf	-Inf	102.30	3	Horizontal	188	3.00	-	34.20	7.40	35.49
PK	5.938G	59.63	68.20	-8.57	52.91	3	Horizontal	188	3.00	-	34.75	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

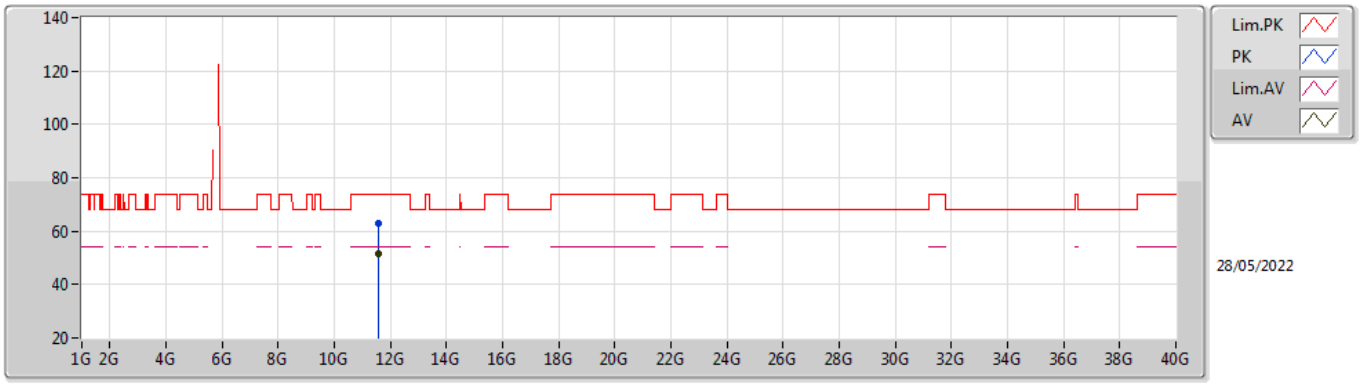


EUT X_2TX
Setting 19.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5524G	63.11	74.00	-10.89	48.76	3	Vertical	215	3.00	-	39.21	10.73	35.59
AV	11.5528G	51.33	54.00	-2.67	36.98	3	Vertical	215	3.00	-	39.21	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

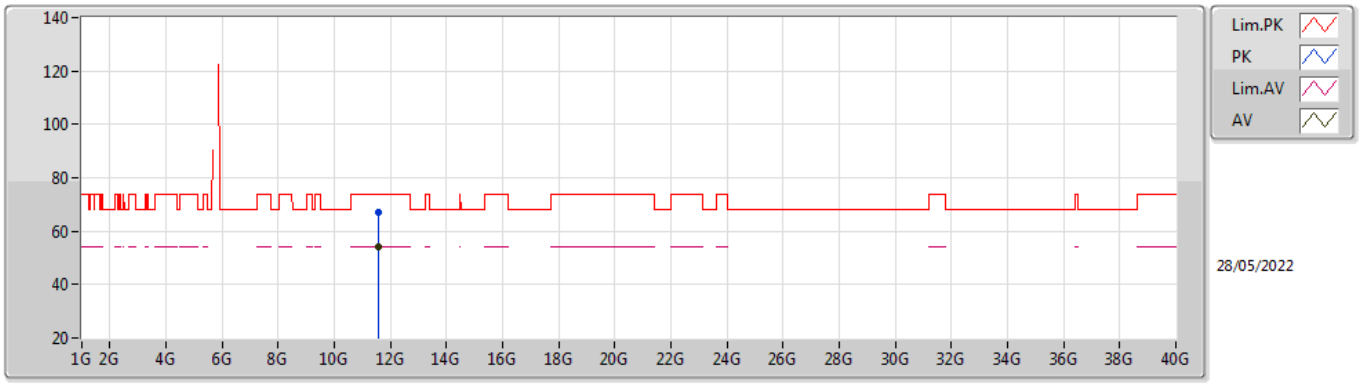


EUT X_2TX
Setting 19.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
AV	11.5528G	53.95	54.00	-0.05	39.60	3	Horizontal	136	2.07	-	39.21	10.73	35.59
PK	11.5524G	66.84	74.00	-7.16	52.49	3	Horizontal	136	2.07	-	39.21	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

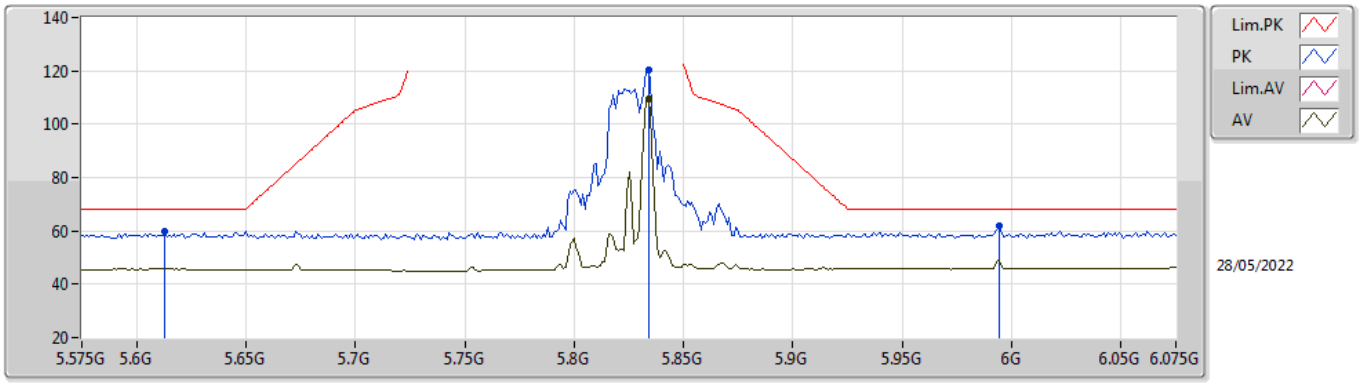


EUT X_2TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.613G	59.73	68.20	-8.47	53.17	3	Vertical	175	1.89	-	34.57	7.40	35.41
PK	5.834G	120.39	Inf	-Inf	114.21	3	Vertical	175	1.89	-	34.27	7.43	35.52
AV	5.834G	109.33	Inf	-Inf	103.15	3	Vertical	175	1.89	-	34.27	7.43	35.52
PK	5.994G	61.75	68.20	-6.45	54.96	3	Vertical	175	1.89	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

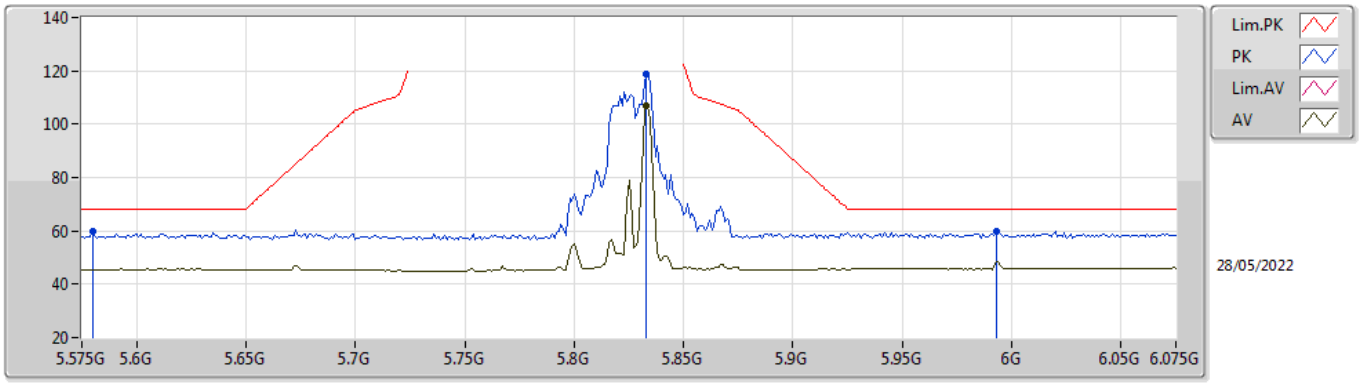


EUT X_2TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.58G	59.63	68.20	-8.57	53.04	3	Horizontal	187	3.00	-	34.60	7.38	35.39
PK	5.833G	118.69	Inf	-Inf	112.51	3	Horizontal	187	3.00	-	34.27	7.43	35.52
AV	5.833G	107.02	Inf	-Inf	100.84	3	Horizontal	187	3.00	-	34.27	7.43	35.52
PK	5.993G	59.80	68.20	-8.40	53.01	3	Horizontal	187	3.00	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

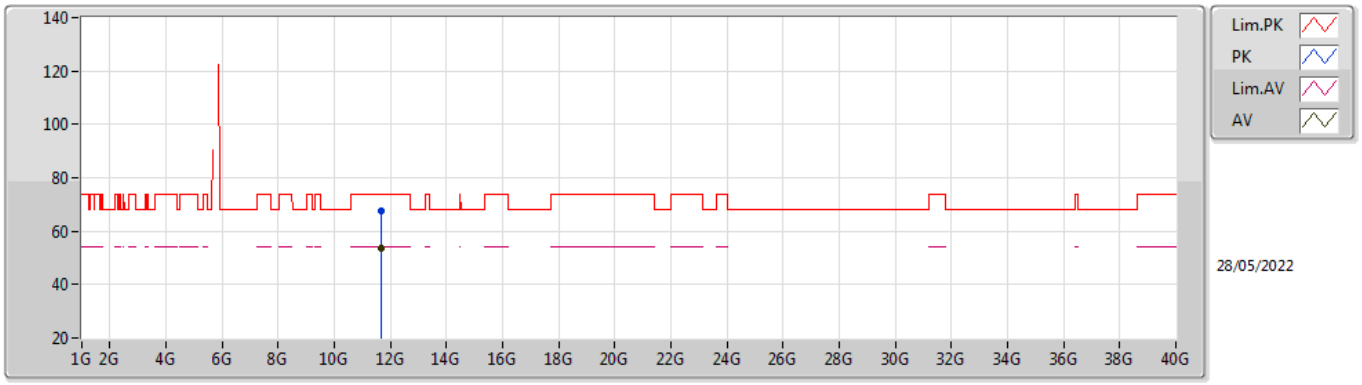


EUT X_2TX
Setting 18
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6668G	67.63	74.00	-6.37	53.04	3	Vertical	178	2.88	-	39.40	10.75	35.56
AV	11.667G	53.87	54.00	-0.13	39.28	3	Vertical	178	2.88	-	39.40	10.75	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

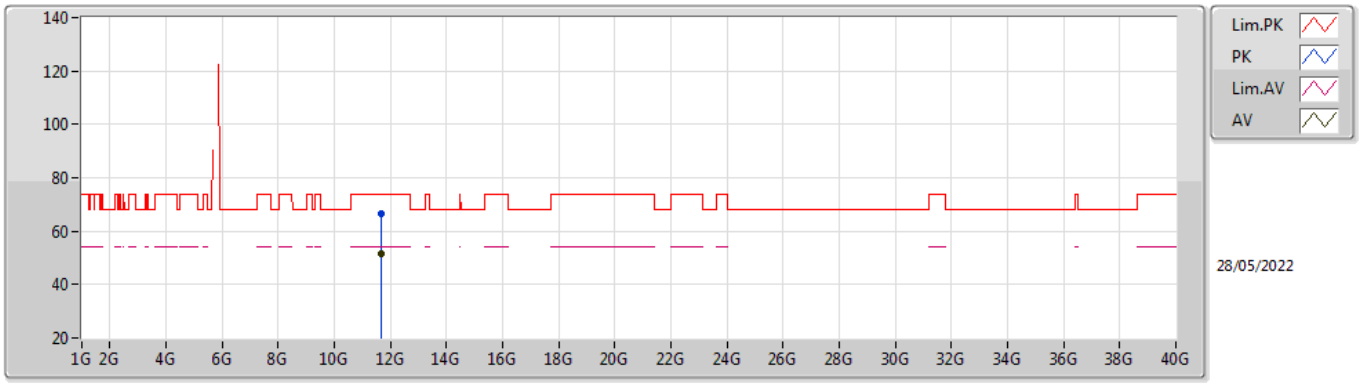

EUT X_2TX
Setting 18
03-B-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.668G	66.64	74.00	-7.36	52.05	3	Horizontal	194	2.04	-	39.40	10.75	35.56
AV	11.6674G	51.79	54.00	-2.21	37.20	3	Horizontal	194	2.04	-	39.40	10.75	35.56

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	PK	5.1424G	73.71	74.00	-0.29	3	Vertical	181	2.12	-

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

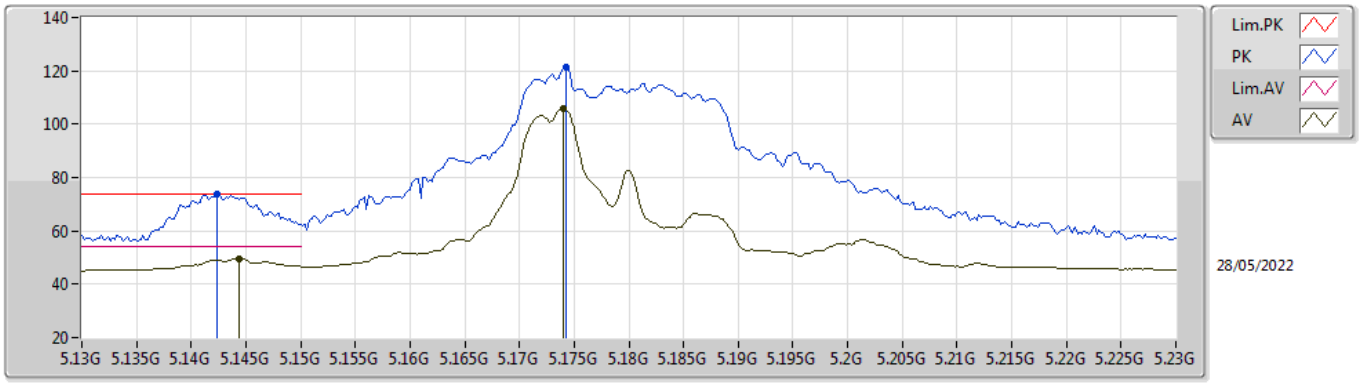


EUT X_2TX
Setting 20.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1424G	73.71	74.00	-0.29	67.90	3	Vertical	181	2.12	-	33.98	7.17	35.34
AV	5.1444G	49.71	54.00	-4.29	43.89	3	Vertical	181	2.12	-	33.99	7.17	35.34
PK	5.1742G	121.25	Inf	-Inf	115.30	3	Vertical	181	2.12	-	34.10	7.19	35.34
AV	5.174G	105.75	Inf	-Inf	99.80	3	Vertical	181	2.12	-	34.10	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

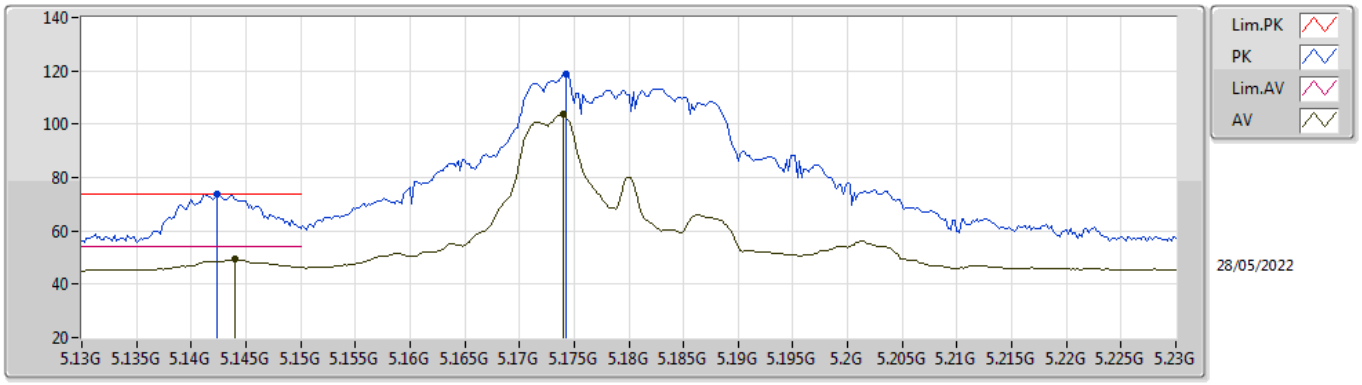


EUT X_2TX
Setting 20.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1424G	73.59	74.00	-0.41	67.78	3	Horizontal	189	2.12	-	33.98	7.17	35.34
AV	5.144G	49.33	54.00	-4.67	43.51	3	Horizontal	189	2.12	-	33.99	7.17	35.34
PK	5.1742G	118.92	Inf	-Inf	112.97	3	Horizontal	189	2.12	-	34.10	7.19	35.34
AV	5.174G	103.75	Inf	-Inf	97.80	3	Horizontal	189	2.12	-	34.10	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

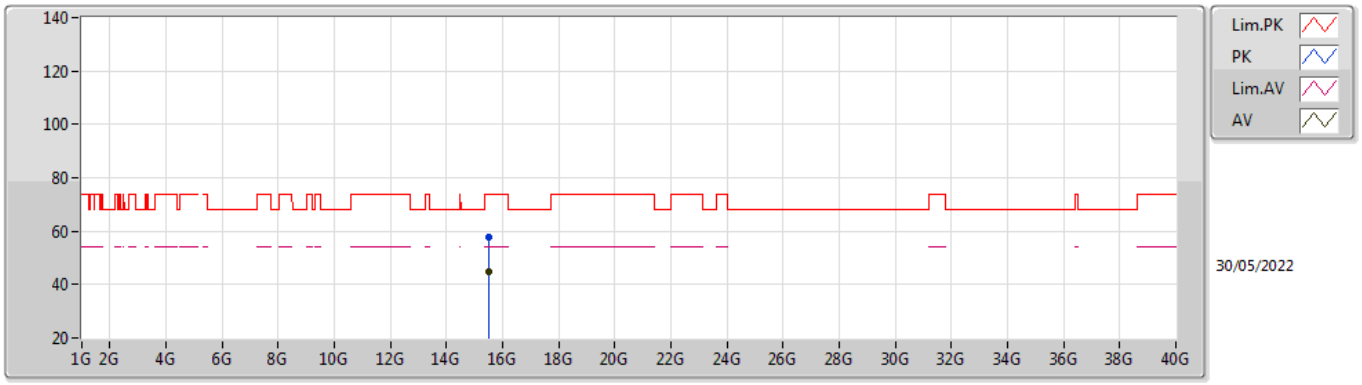


EUT X_2TX
Setting 20.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.495G	57.58	74.00	-16.42	41.09	3	Vertical	345	1.36	-	38.71	13.15	35.37
AV	15.5016G	44.69	54.00	-9.31	28.22	3	Vertical	345	1.36	-	38.69	13.15	35.37

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

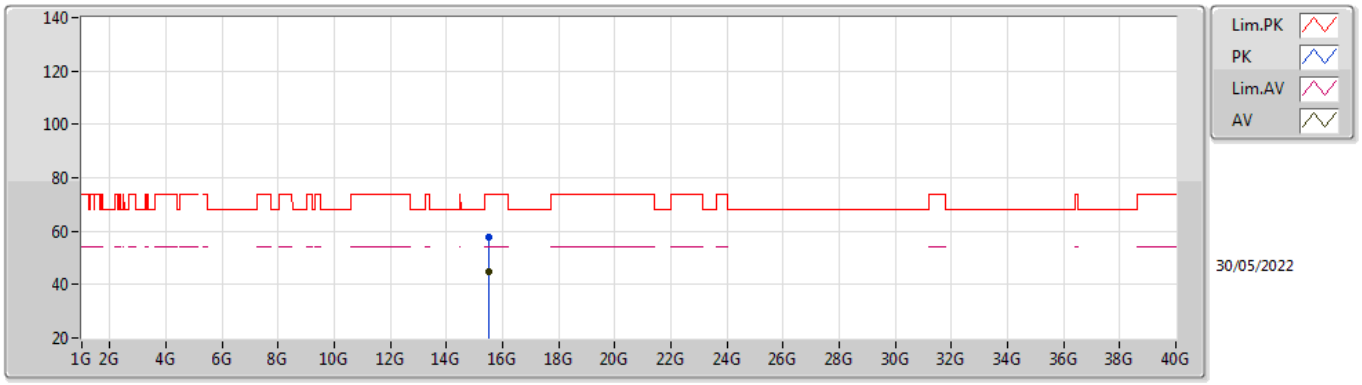


EUT X_2TX
Setting 20.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.4982G	57.55	74.00	-16.45	41.07	3	Horizontal	172	1.45	-	38.70	13.15	35.37
AV	15.503G	44.74	54.00	-9.26	28.28	3	Horizontal	172	1.45	-	38.68	13.15	35.37

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

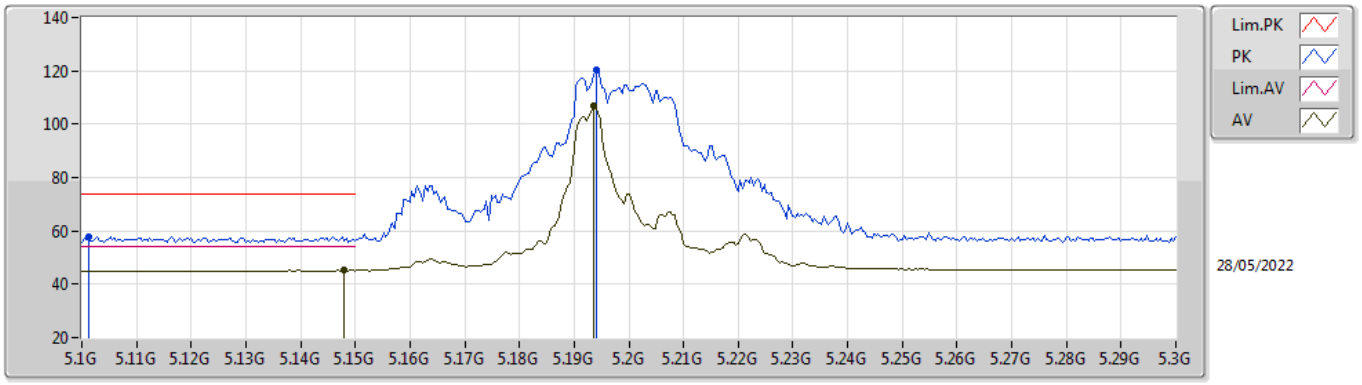


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1012G	57.88	74.00	-16.12	52.16	3	Vertical	186	1.91	-	33.90	7.15	35.33
AV	5.148G	45.13	54.00	-8.87	39.30	3	Vertical	186	1.91	-	34.00	7.17	35.34
PK	5.194G	120.24	Inf	-Inf	114.20	3	Vertical	186	1.91	-	34.18	7.20	35.34
AV	5.1936G	106.67	Inf	-Inf	100.64	3	Vertical	186	1.91	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

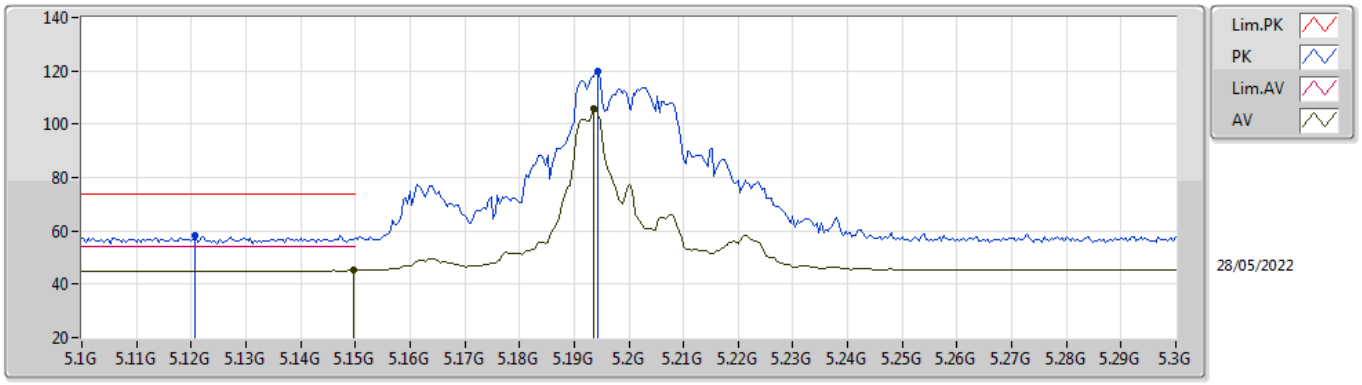


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1208G	58.25	74.00	-15.75	52.48	3	Horizontal	189	2.09	-	33.94	7.16	35.33
AV	5.1496G	45.15	54.00	-8.85	39.32	3	Horizontal	189	2.09	-	34.00	7.17	35.34
PK	5.1944G	119.96	Inf	-Inf	113.92	3	Horizontal	189	2.09	-	34.18	7.20	35.34
AV	5.1936G	105.81	Inf	-Inf	99.78	3	Horizontal	189	2.09	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

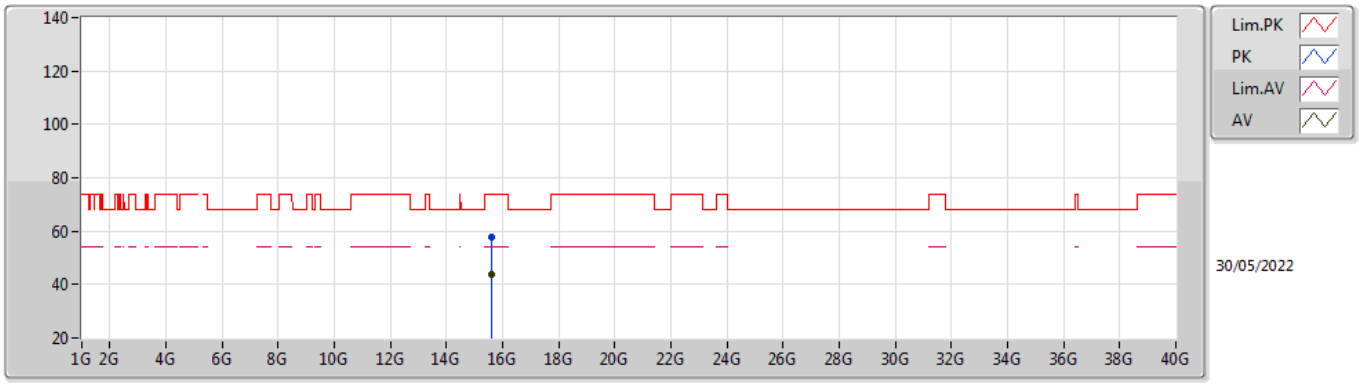


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5866G	57.53	74.00	-16.47	41.69	3	Vertical	226	1.60	-	38.09	13.19	35.44
AV	15.5938G	43.82	54.00	-10.18	28.03	3	Vertical	226	1.60	-	38.04	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

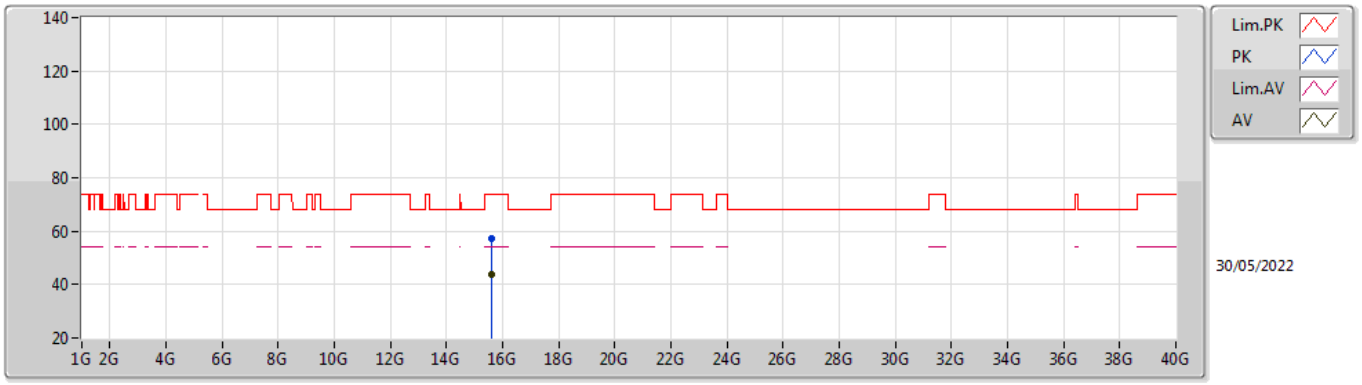


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6152G	57.26	74.00	-16.74	41.60	3	Horizontal	185	1.03	-	37.92	13.21	35.47
AV	15.5834G	43.83	54.00	-10.17	27.96	3	Horizontal	185	1.03	-	38.12	13.19	35.44

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

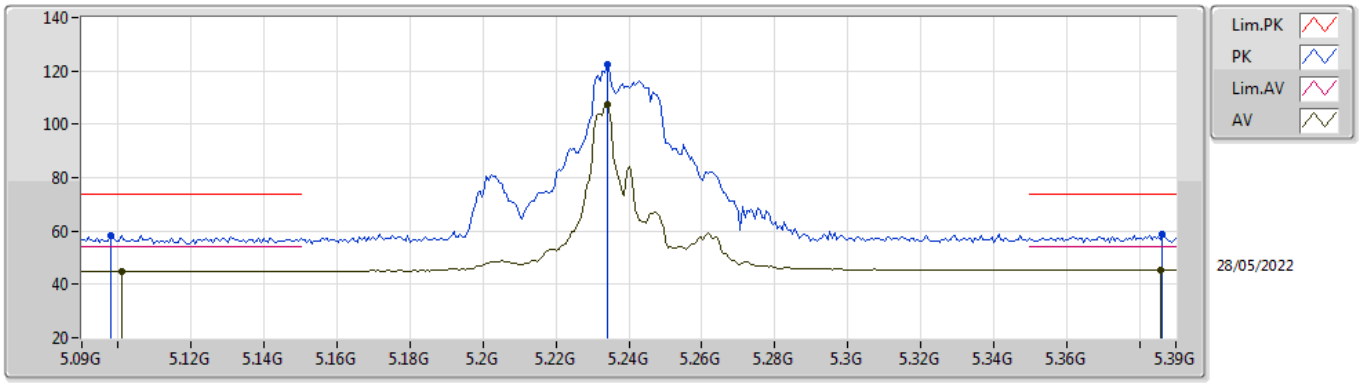


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.0978G	58.28	74.00	-15.72	52.56	3	Vertical	183	1.99	-	33.90	7.15	35.33
AV	5.1008G	45.03	54.00	-8.97	39.31	3	Vertical	183	1.99	-	33.90	7.15	35.33
PK	5.234G	122.35	Inf	-Inf	116.15	3	Vertical	183	1.99	-	34.34	7.20	35.34
AV	5.234G	107.22	Inf	-Inf	101.02	3	Vertical	183	1.99	-	34.34	7.20	35.34
PK	5.3864G	58.92	74.00	-15.08	52.50	3	Vertical	183	1.99	-	34.57	7.20	35.35
AV	5.3858G	45.50	54.00	-8.50	39.08	3	Vertical	183	1.99	-	34.57	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

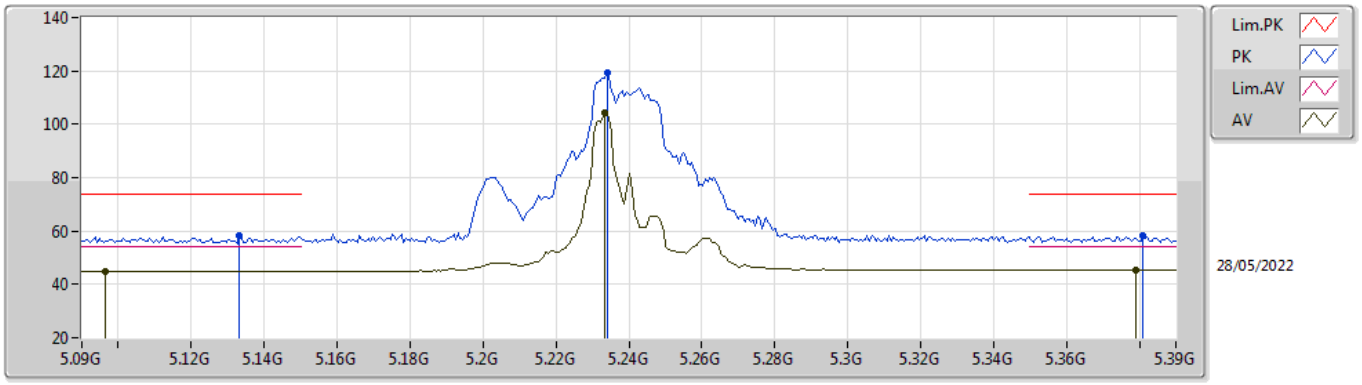


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1332G	58.12	74.00	-15.88	52.32	3	Horizontal	191	2.19	-	33.97	7.17	35.34
AV	5.0966G	45.03	54.00	-8.97	39.32	3	Horizontal	191	2.19	-	33.89	7.15	35.33
PK	5.234G	119.42	Inf	-Inf	113.22	3	Horizontal	191	2.19	-	34.34	7.20	35.34
AV	5.2334G	104.12	Inf	-Inf	97.93	3	Horizontal	191	2.19	-	34.33	7.20	35.34
PK	5.381G	58.30	74.00	-15.70	51.89	3	Horizontal	191	2.19	-	34.56	7.20	35.35
AV	5.3792G	45.40	54.00	-8.60	38.99	3	Horizontal	191	2.19	-	34.56	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

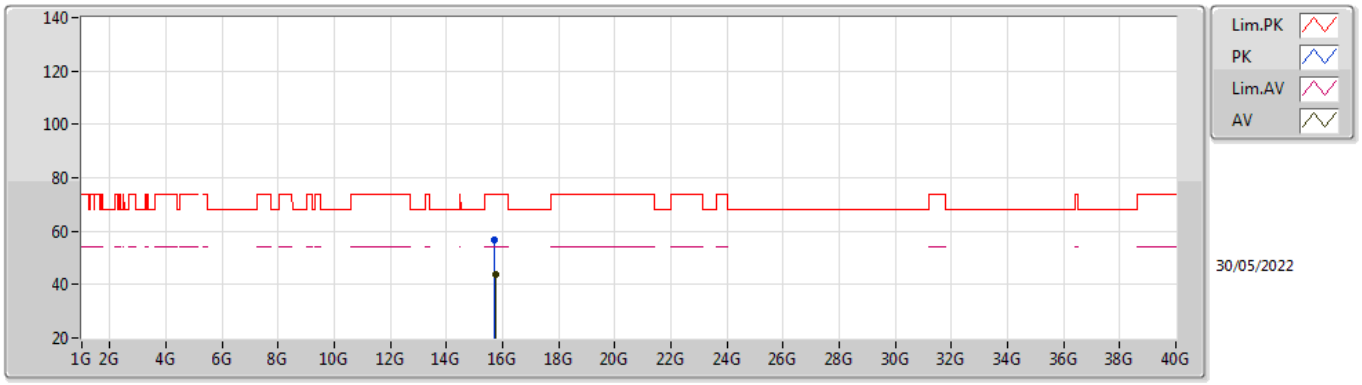


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.6896G	56.83	74.00	-17.17	41.57	3	Vertical	328	2.79	-	37.55	13.24	35.53
AV	15.766G	43.93	54.00	-10.07	28.48	3	Vertical	328	2.79	-	37.76	13.28	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

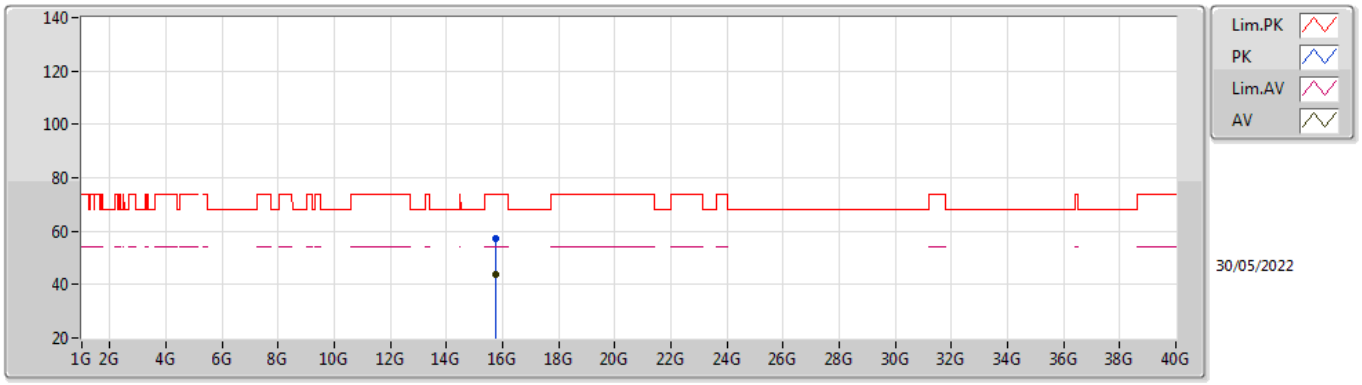


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7486G	57.20	74.00	-16.80	41.82	3	Horizontal	145	2.54	-	37.69	13.27	35.58
AV	15.7638G	43.83	54.00	-10.17	28.38	3	Horizontal	145	2.54	-	37.76	13.28	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

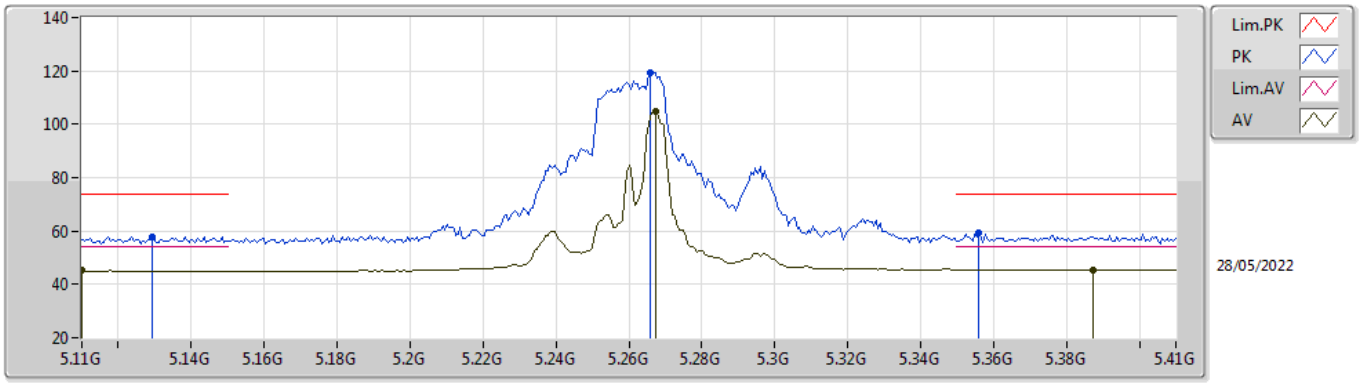


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1292G	57.92	74.00	-16.08	52.14	3	Vertical	176	2.11	-	33.96	7.16	35.34
AV	5.11G	45.16	54.00	-8.84	39.41	3	Vertical	176	2.11	-	33.92	7.16	35.33
PK	5.266G	119.31	Inf	-Inf	113.02	3	Vertical	176	2.11	-	34.43	7.20	35.34
AV	5.2672G	104.80	Inf	-Inf	98.51	3	Vertical	176	2.11	-	34.43	7.20	35.34
PK	5.356G	59.51	74.00	-14.49	53.14	3	Vertical	176	2.11	-	34.51	7.20	35.34
AV	5.3872G	45.59	54.00	-8.41	39.17	3	Vertical	176	2.11	-	34.57	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

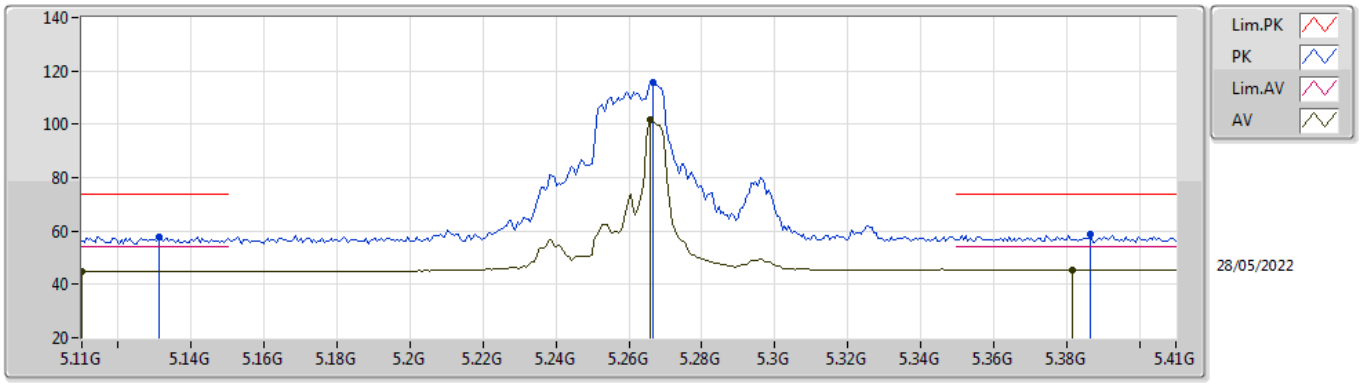


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.131G	57.96	74.00	-16.04	52.17	3	Horizontal	193	1.80	-	33.96	7.17	35.34
AV	5.11G	44.97	54.00	-9.03	39.22	3	Horizontal	193	1.80	-	33.92	7.16	35.33
PK	5.2666G	115.83	Inf	-Inf	109.54	3	Horizontal	193	1.80	-	34.43	7.20	35.34
AV	5.266G	101.49	Inf	-Inf	95.20	3	Horizontal	193	1.80	-	34.43	7.20	35.34
PK	5.3866G	58.86	74.00	-15.14	52.44	3	Horizontal	193	1.80	-	34.57	7.20	35.35
AV	5.3818G	45.56	54.00	-8.44	39.15	3	Horizontal	193	1.80	-	34.56	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

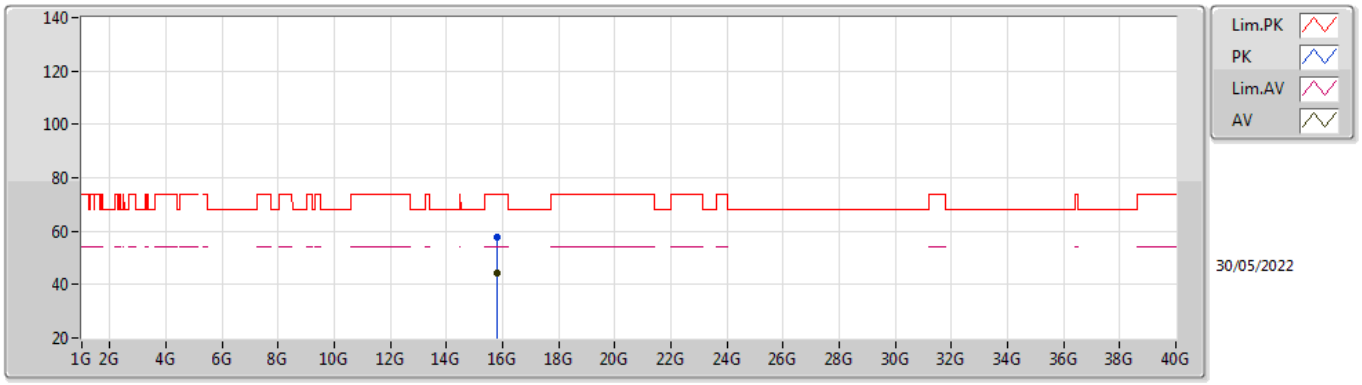


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.8194G	57.91	74.00	-16.09	42.40	3	Vertical	62	1.37	-	37.84	13.31	35.64
AV	15.8006G	44.21	54.00	-9.79	28.63	3	Vertical	62	1.37	-	37.90	13.30	35.62

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

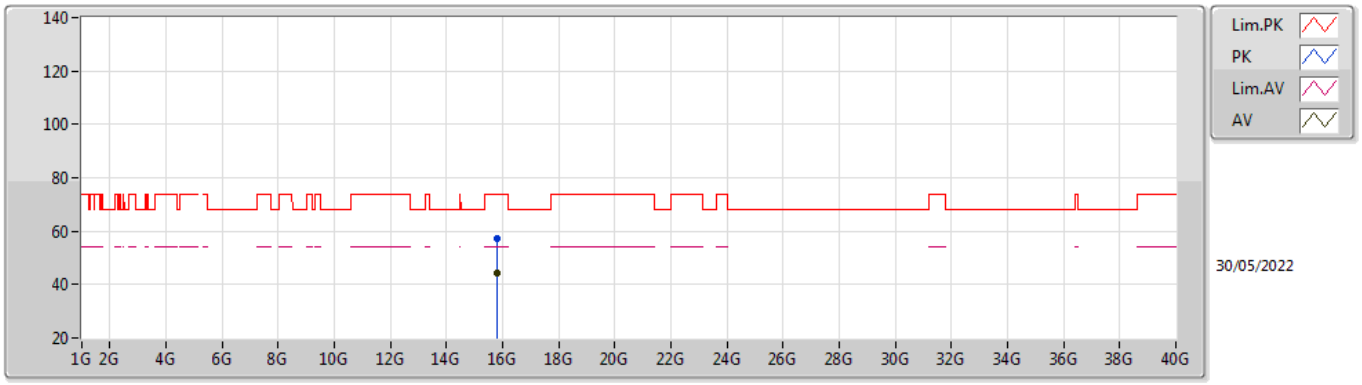


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7976G	57.42	74.00	-16.58	41.85	3	Horizontal	331	1.37	-	37.89	13.30	35.62
AV	15.8046G	44.16	54.00	-9.84	28.60	3	Horizontal	331	1.37	-	37.89	13.30	35.63

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

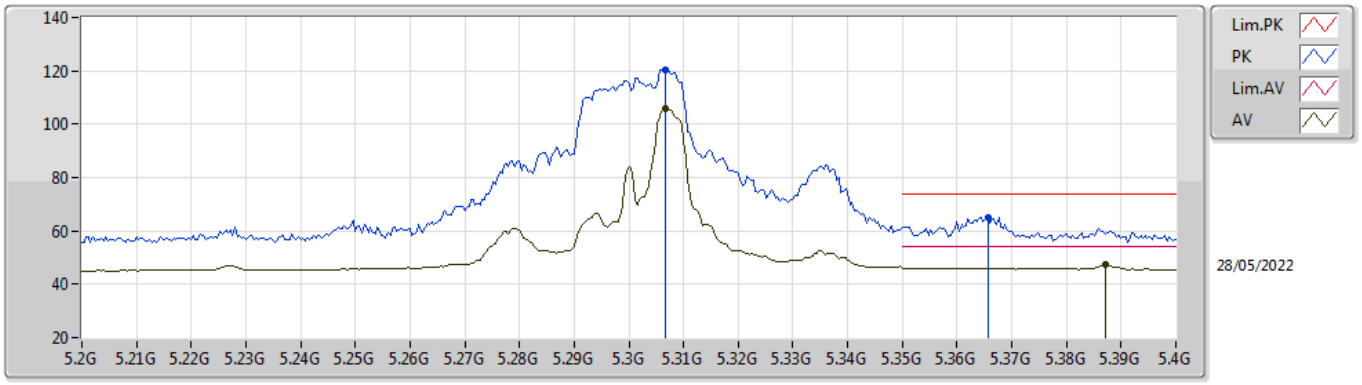


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3068G	120.49	Inf	-Inf	114.13	3	Vertical	177	1.98	-	34.50	7.20	35.34
AV	5.3068G	105.82	Inf	-Inf	99.46	3	Vertical	177	1.98	-	34.50	7.20	35.34
PK	5.3656G	65.25	74.00	-8.75	58.86	3	Vertical	177	1.98	-	34.53	7.20	35.34
AV	5.3872G	47.60	54.00	-6.40	41.18	3	Vertical	177	1.98	-	34.57	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

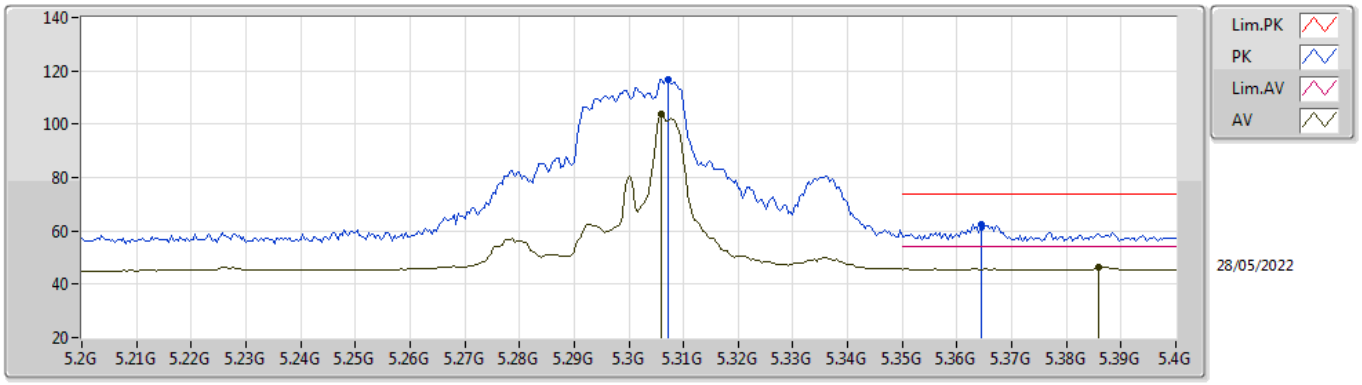


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3072G	116.97	Inf	-Inf	110.61	3	Horizontal	201	2.00	-	34.50	7.20	35.34
AV	5.306G	103.88	Inf	-Inf	97.52	3	Horizontal	201	2.00	-	34.50	7.20	35.34
PK	5.3644G	62.63	74.00	-11.37	56.24	3	Horizontal	201	2.00	-	34.53	7.20	35.34
AV	5.386G	46.52	54.00	-7.48	40.10	3	Horizontal	201	2.00	-	34.57	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

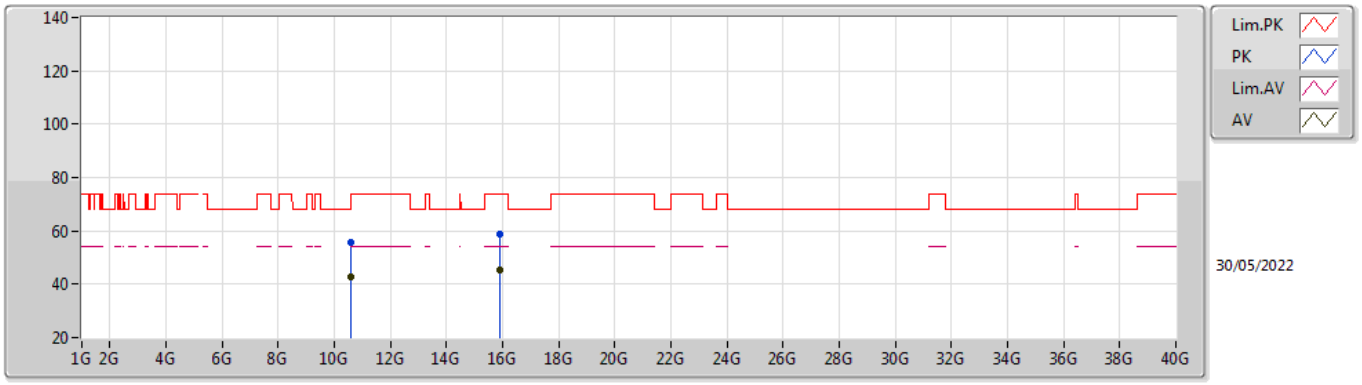


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6136G	55.46	74.00	-18.54	42.01	3	Vertical	200	1.42	-	38.23	10.59	35.37
AV	10.614G	42.68	54.00	-11.32	29.23	3	Vertical	200	1.42	-	38.23	10.59	35.37
PK	15.92G	58.55	74.00	-15.45	43.35	3	Vertical	172	2.02	-	37.56	13.36	35.72
AV	15.9224G	45.24	54.00	-8.76	30.04	3	Vertical	172	2.02	-	37.56	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

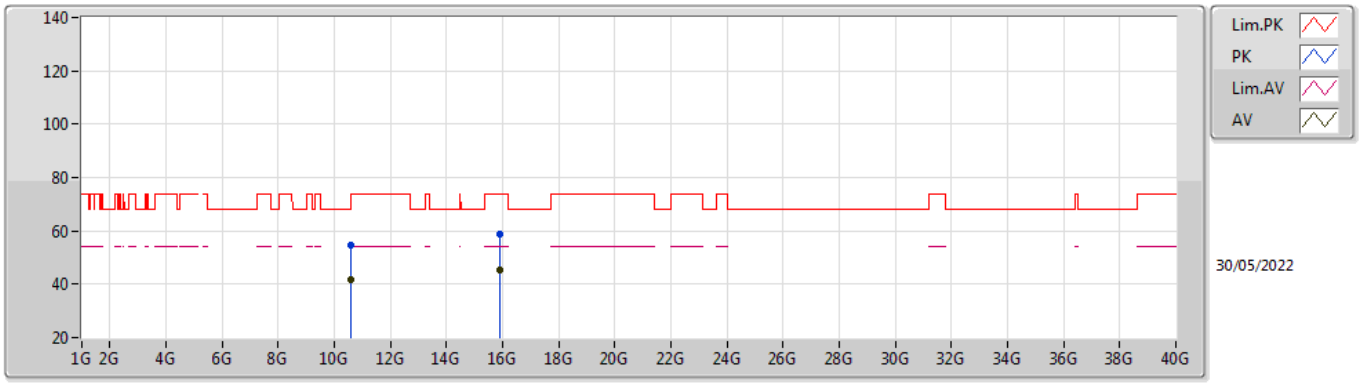


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6142G	54.42	74.00	-19.58	40.97	3	Horizontal	143	1.80	-	38.23	10.59	35.37
AV	10.6146G	41.66	54.00	-12.34	28.21	3	Horizontal	143	1.80	-	38.23	10.59	35.37
PK	15.9218G	58.97	74.00	-15.03	43.77	3	Horizontal	228	2.29	-	37.56	13.36	35.72
AV	15.9224G	45.31	54.00	-8.69	30.11	3	Horizontal	228	2.29	-	37.56	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

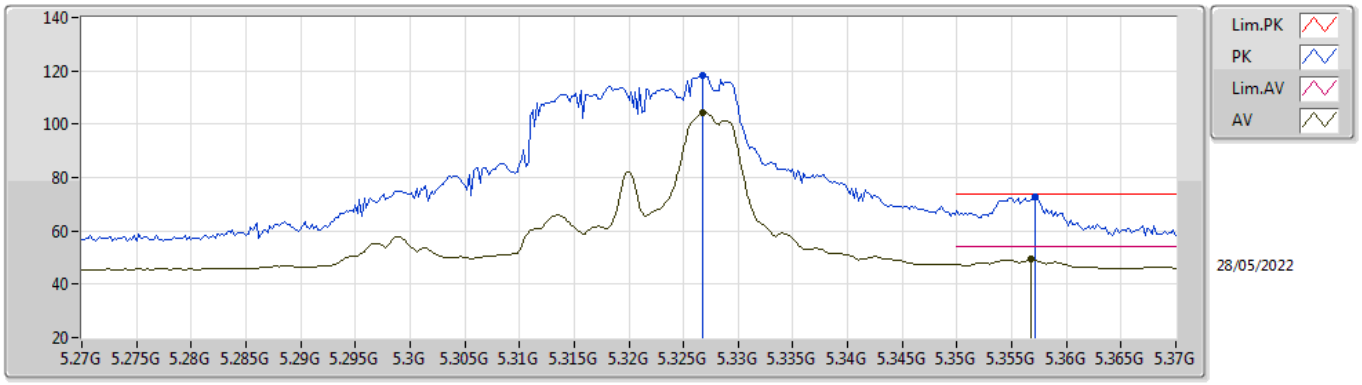


EUT X_2TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3268G	118.09	Inf	-Inf	111.73	3	Vertical	180	1.80	-	34.50	7.20	35.34
AV	5.3268G	104.53	Inf	-Inf	98.17	3	Vertical	180	1.80	-	34.50	7.20	35.34
PK	5.3572G	72.59	74.00	-1.41	66.22	3	Vertical	180	1.80	-	34.51	7.20	35.34
AV	5.3568G	49.27	54.00	-4.73	42.90	3	Vertical	180	1.80	-	34.51	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

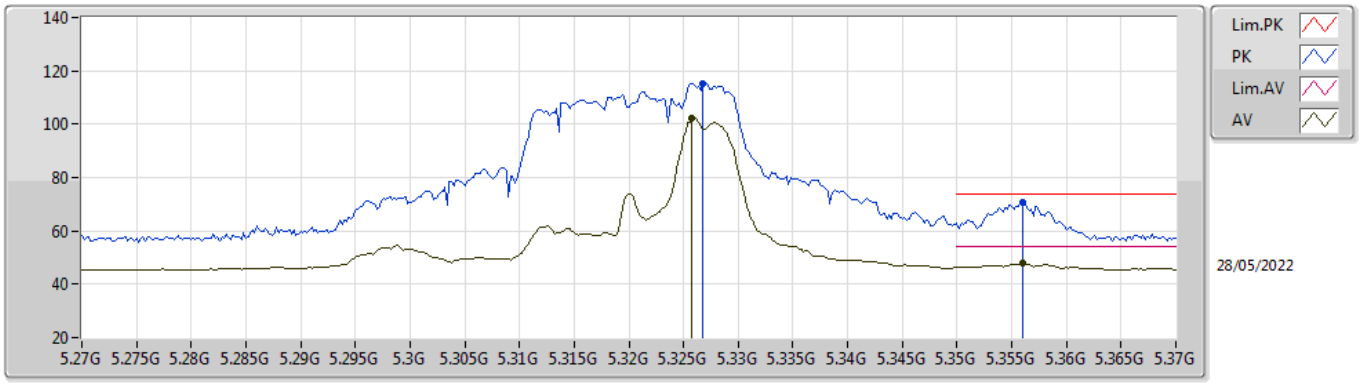


EUT X_2TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3268G	115.13	Inf	-Inf	108.77	3	Horizontal	201	2.03	-	34.50	7.20	35.34
AV	5.3258G	102.21	Inf	-Inf	95.85	3	Horizontal	201	2.03	-	34.50	7.20	35.34
PK	5.356G	70.88	74.00	-3.12	64.51	3	Horizontal	201	2.03	-	34.51	7.20	35.34
AV	5.356G	47.80	54.00	-6.20	41.43	3	Horizontal	201	2.03	-	34.51	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

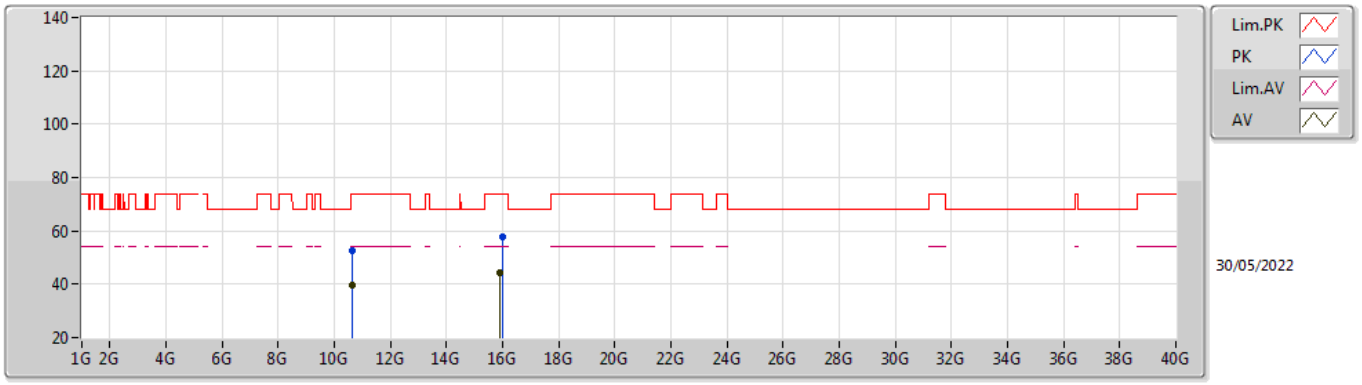


EUT X_2TX
Setting 18
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6368G	52.73	74.00	-21.27	39.21	3	Vertical	117	1.04	-	38.27	10.60	35.35
AV	10.6538G	39.64	54.00	-14.36	26.07	3	Vertical	117	1.04	-	38.31	10.60	35.34
PK	15.9912G	57.66	74.00	-16.34	42.62	3	Vertical	139	2.95	-	37.42	13.40	35.78
AV	15.9168G	44.06	54.00	-9.94	28.85	3	Vertical	139	2.95	-	37.57	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

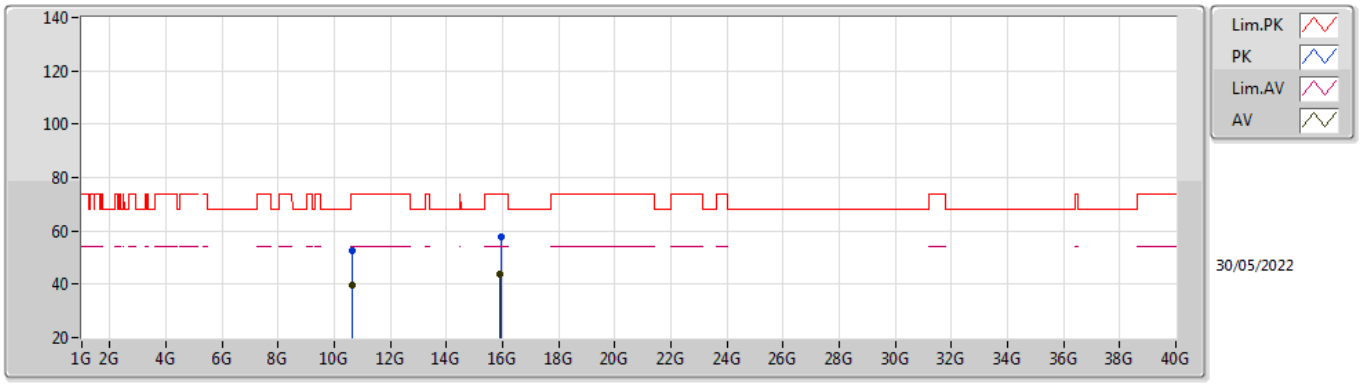


EUT X_2TX
Setting 18
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6378G	52.65	74.00	-21.35	39.12	3	Horizontal	196	2.56	-	38.28	10.60	35.35
AV	10.6536G	39.62	54.00	-14.38	26.05	3	Horizontal	196	2.56	-	38.31	10.60	35.34
PK	15.9324G	57.97	74.00	-16.03	42.79	3	Horizontal	322	1.85	-	37.54	13.37	35.73
AV	15.91G	44.04	54.00	-9.96	28.82	3	Horizontal	322	1.85	-	37.58	13.35	35.71

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

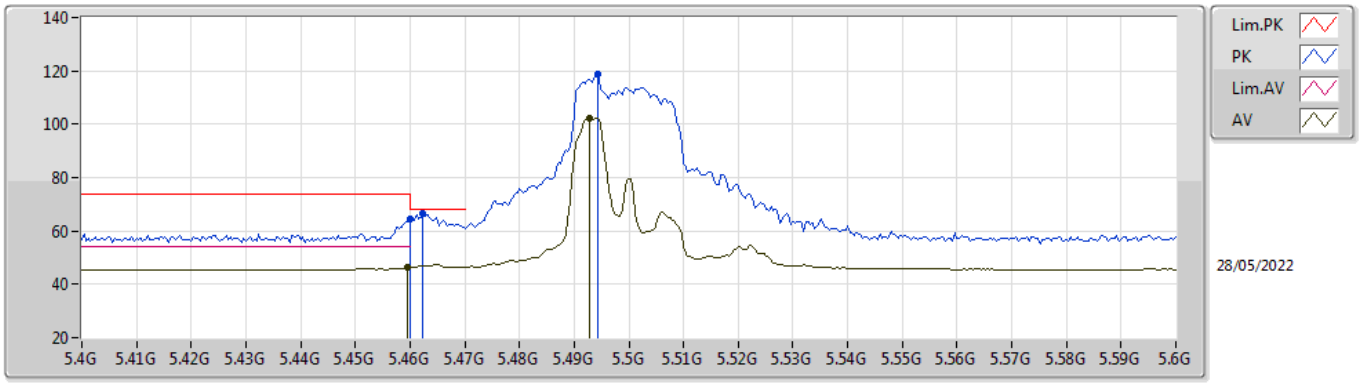


EUT X_2TX
Setting 18.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.46G	64.24	74.00	-9.76	57.81	3	Vertical	172	1.80	-	34.52	7.26	35.35
AV	5.4596G	46.44	54.00	-7.56	40.01	3	Vertical	172	1.80	-	34.52	7.26	35.35
PK	5.4624G	66.74	68.20	-1.46	60.31	3	Vertical	172	1.80	-	34.52	7.26	35.35
PK	5.4944G	119.02	Inf	-Inf	112.49	3	Vertical	172	1.80	-	34.59	7.29	35.35
AV	5.4928G	102.16	Inf	-Inf	95.63	3	Vertical	172	1.80	-	34.59	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

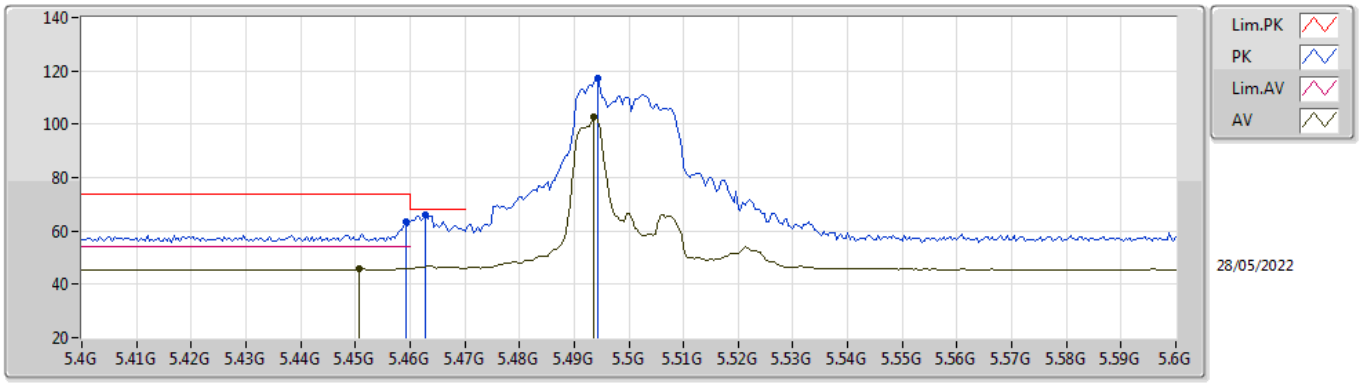


EUT X_2TX
Setting 18.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4592G	63.41	74.00	-10.59	56.98	3	Horizontal	187	2.94	-	34.52	7.26	35.35
AV	5.4508G	45.98	54.00	-8.02	39.58	3	Horizontal	187	2.94	-	34.50	7.25	35.35
PK	5.4628G	65.95	68.20	-2.25	59.51	3	Horizontal	187	2.94	-	34.53	7.26	35.35
PK	5.4944G	117.45	Inf	-Inf	110.92	3	Horizontal	187	2.94	-	34.59	7.29	35.35
AV	5.4936G	102.99	Inf	-Inf	96.46	3	Horizontal	187	2.94	-	34.59	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

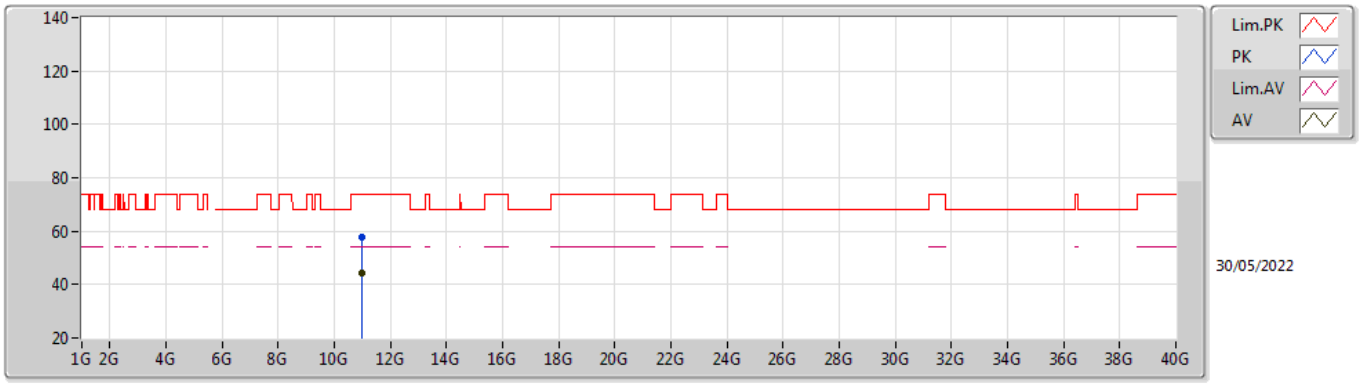


EUT X_2TX
Setting 18.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9884G	57.85	74.00	-16.15	43.86	3	Vertical	80	1.47	-	38.39	10.65	35.05
AV	10.9862G	44.54	54.00	-9.46	30.55	3	Vertical	80	1.47	-	38.39	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

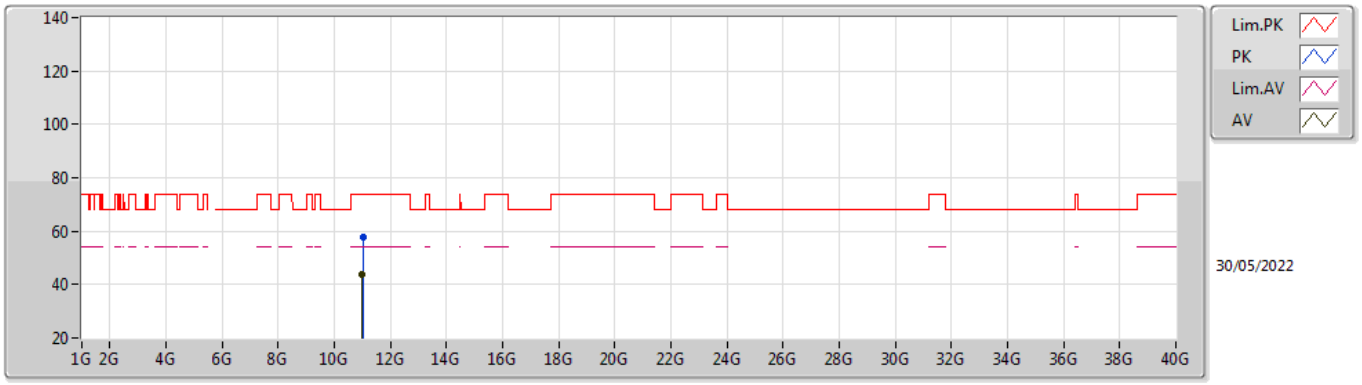


EUT X_2TX
Setting 18.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0432G	57.82	74.00	-16.18	43.81	3	Horizontal	24	2.97	-	38.44	10.66	35.09
AV	10.9864G	43.81	54.00	-10.19	29.82	3	Horizontal	24	2.97	-	38.39	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

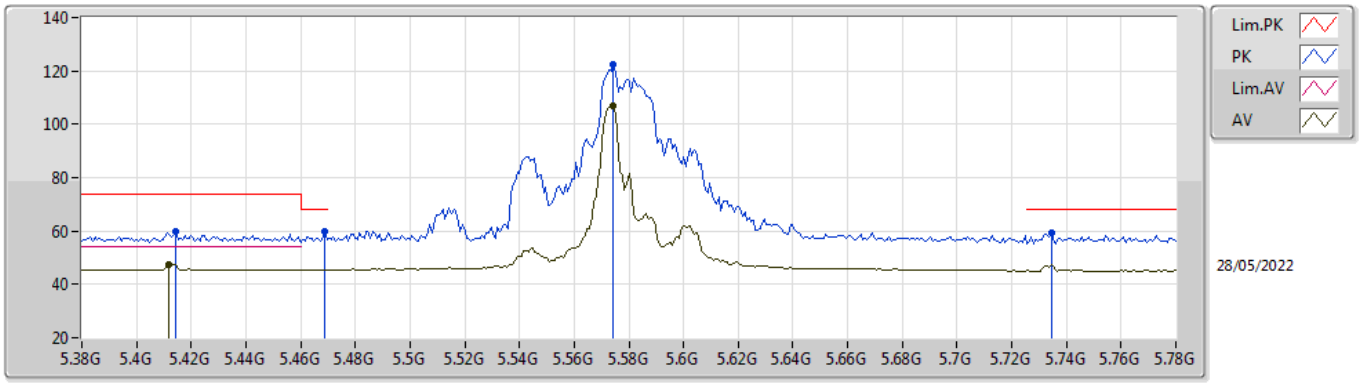


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4144G	59.94	74.00	-14.06	53.51	3	Vertical	177	1.70	-	34.57	7.21	35.35
AV	5.412G	47.30	54.00	-6.70	40.86	3	Vertical	177	1.70	-	34.58	7.21	35.35
PK	5.4688G	59.58	68.20	-8.62	53.12	3	Vertical	177	1.70	-	34.54	7.27	35.35
PK	5.5744G	122.32	Inf	-Inf	115.74	3	Vertical	177	1.70	-	34.60	7.37	35.39
AV	5.5744G	107.08	Inf	-Inf	100.50	3	Vertical	177	1.70	-	34.60	7.37	35.39
PK	5.7344G	59.40	68.20	-8.80	53.24	3	Vertical	177	1.70	-	34.23	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

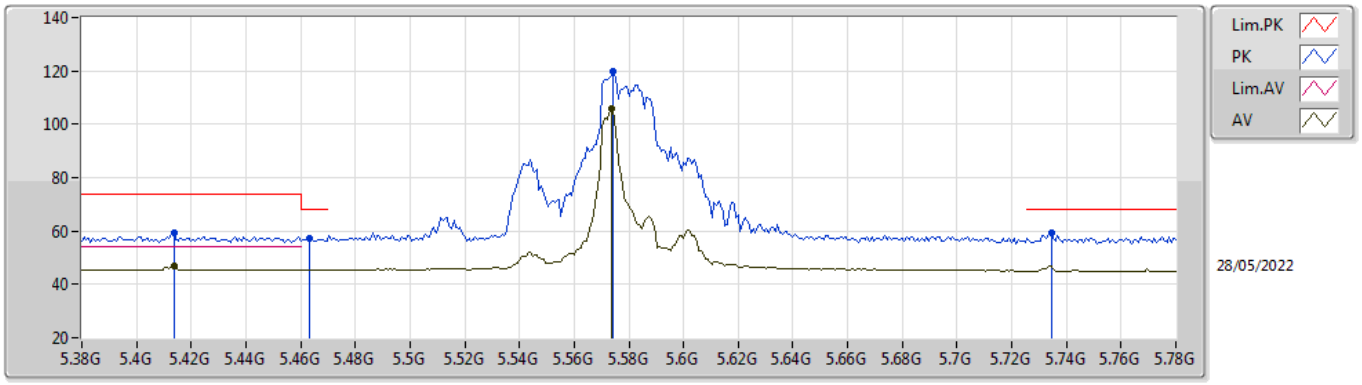


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4136G	59.23	74.00	-14.77	52.80	3	Horizontal	188	2.96	-	34.57	7.21	35.35
AV	5.4136G	46.68	54.00	-7.32	40.25	3	Horizontal	188	2.96	-	34.57	7.21	35.35
PK	5.4632G	57.06	68.20	-11.14	50.62	3	Horizontal	188	2.96	-	34.53	7.26	35.35
PK	5.5744G	120.06	Inf	-Inf	113.48	3	Horizontal	188	2.96	-	34.60	7.37	35.39
AV	5.5736G	106.08	Inf	-Inf	99.50	3	Horizontal	188	2.96	-	34.60	7.37	35.39
PK	5.7344G	59.38	68.20	-8.82	53.22	3	Horizontal	188	2.96	-	34.23	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

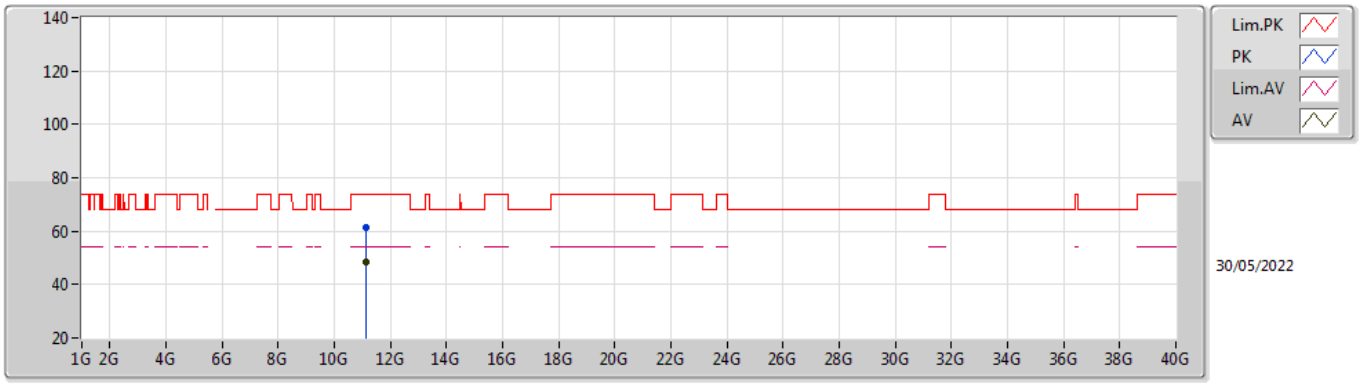


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1462G	61.21	74.00	-12.79	47.19	3	Vertical	163	2.96	-	38.55	10.67	35.20
AV	11.1464G	48.38	54.00	-5.62	34.36	3	Vertical	163	2.96	-	38.55	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

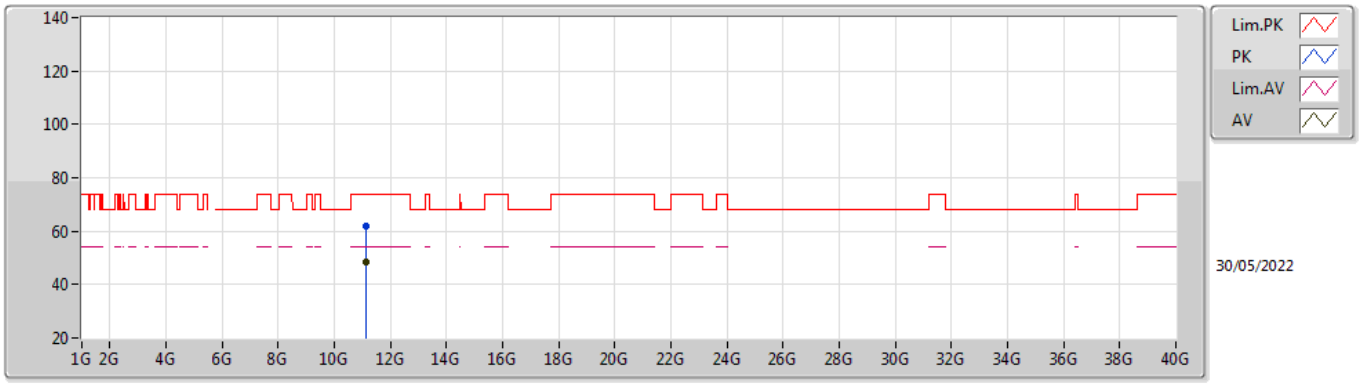


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1454G	62.08	74.00	-11.92	48.06	3	Horizontal	132	2.09	-	38.55	10.67	35.20
AV	11.1454G	48.67	54.00	-5.33	34.65	3	Horizontal	132	2.09	-	38.55	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

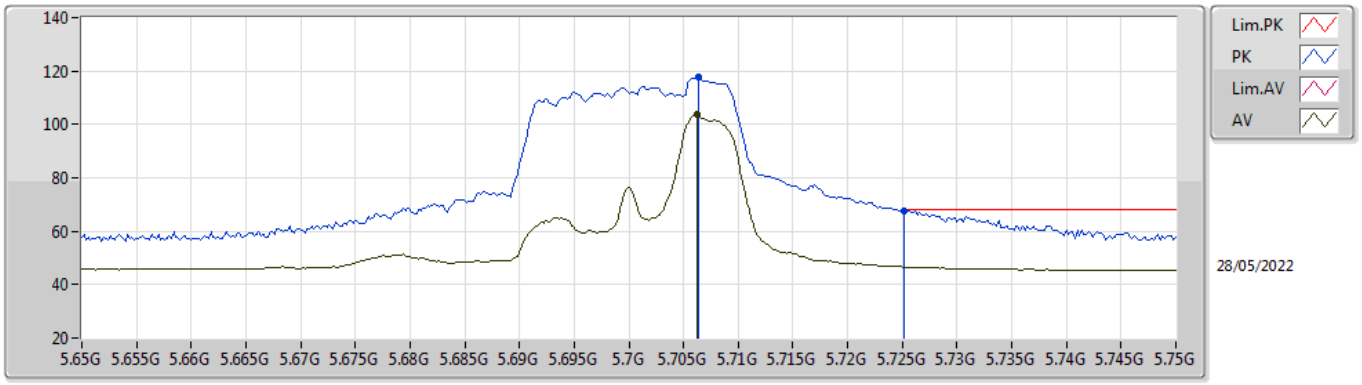


EUT X_2TX
Setting 16.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7064G	117.55	Inf	-Inf	111.31	3	Vertical	176	1.75	-	34.29	7.40	35.45
AV	5.7062G	103.76	Inf	-Inf	97.52	3	Vertical	176	1.75	-	34.29	7.40	35.45
PK	5.7252G	67.53	68.20	-0.67	61.34	3	Vertical	176	1.75	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

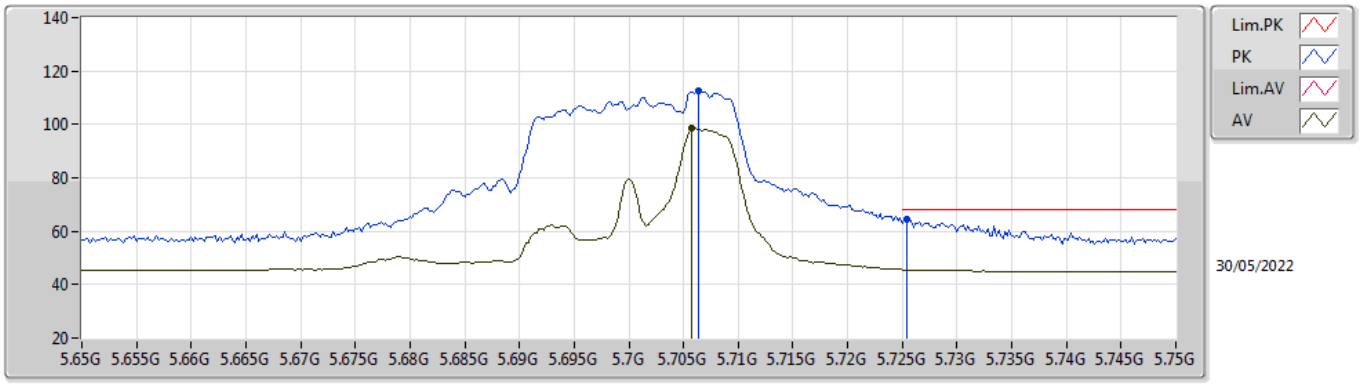


EUT X_2TX
Setting 16.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7064G	112.38	Inf	-Inf	106.14	3	Horizontal	71	2.72	-	34.29	7.40	35.45
AV	5.7058G	98.48	Inf	-Inf	92.24	3	Horizontal	71	2.72	-	34.29	7.40	35.45
PK	5.7254G	64.54	68.20	-3.66	58.35	3	Horizontal	71	2.72	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

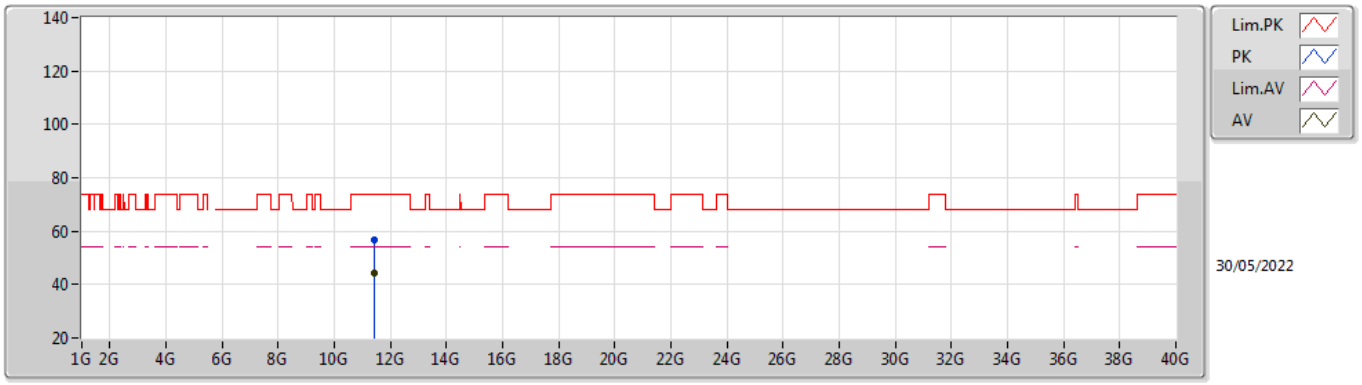


EUT X_2TX
Setting 16.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4144G	56.64	74.00	-17.36	42.60	3	Vertical	101	1.29	-	38.83	10.71	35.50
AV	11.4146G	44.40	54.00	-9.60	30.36	3	Vertical	101	1.29	-	38.83	10.71	35.50

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

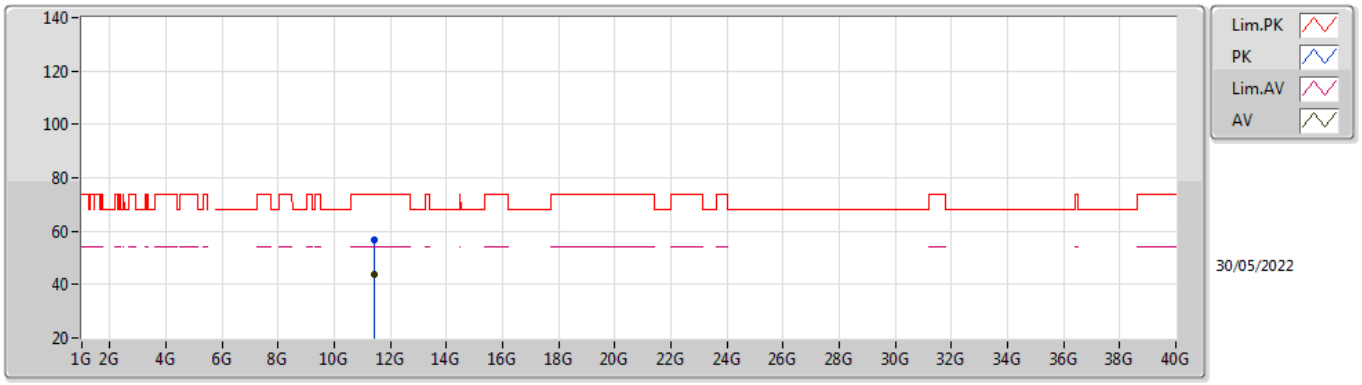


EUT X_2TX
Setting 16.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4156G	56.92	74.00	-17.08	42.89	3	Horizontal	19	1.88	-	38.83	10.71	35.51
AV	11.4148G	44.01	54.00	-9.99	29.97	3	Horizontal	19	1.88	-	38.83	10.71	35.50

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

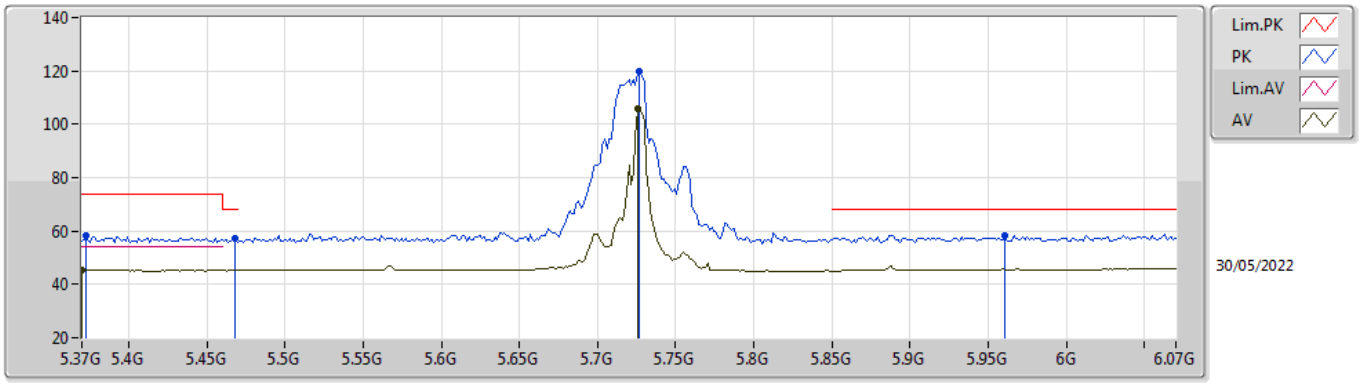


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3728G	58.19	74.00	-15.81	51.78	3	Vertical	176	1.80	-	34.55	7.20	35.34
AV	5.37G	45.26	54.00	-8.74	38.86	3	Vertical	176	1.80	-	34.54	7.20	35.34
PK	5.468G	57.45	68.20	-10.75	50.99	3	Vertical	176	1.80	-	34.54	7.27	35.35
PK	5.727G	119.79	Inf	-Inf	113.60	3	Vertical	176	1.80	-	34.25	7.40	35.46
AV	5.7256G	106.09	Inf	-Inf	99.90	3	Vertical	176	1.80	-	34.25	7.40	35.46
PK	5.9608G	58.46	68.20	-9.74	51.68	3	Vertical	176	1.80	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

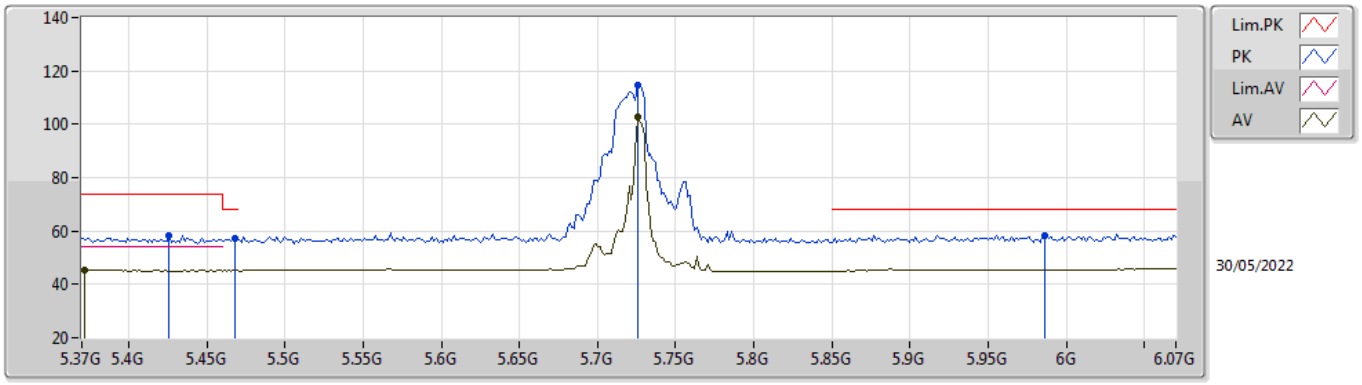


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.426G	58.23	74.00	-15.77	51.80	3	Horizontal	200	1.20	-	34.55	7.23	35.35
AV	5.3714G	45.18	54.00	-8.82	38.78	3	Horizontal	200	1.20	-	34.54	7.20	35.34
PK	5.468G	57.33	68.20	-10.87	50.87	3	Horizontal	200	1.20	-	34.54	7.27	35.35
PK	5.7256G	114.86	Inf	-Inf	108.67	3	Horizontal	200	1.20	-	34.25	7.40	35.46
AV	5.7256G	102.92	Inf	-Inf	96.73	3	Horizontal	200	1.20	-	34.25	7.40	35.46
PK	5.986G	58.49	68.20	-9.71	51.69	3	Horizontal	200	1.20	-	34.80	7.59	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

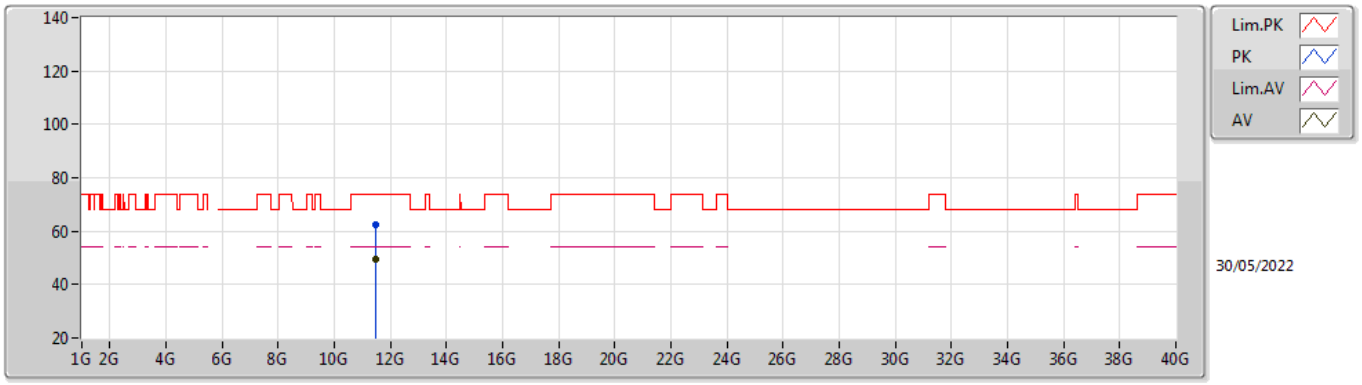


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4544G	62.41	74.00	-11.59	48.33	3	Vertical	182	2.79	-	38.91	10.72	35.55
AV	11.4546G	49.41	54.00	-4.59	35.33	3	Vertical	182	2.79	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

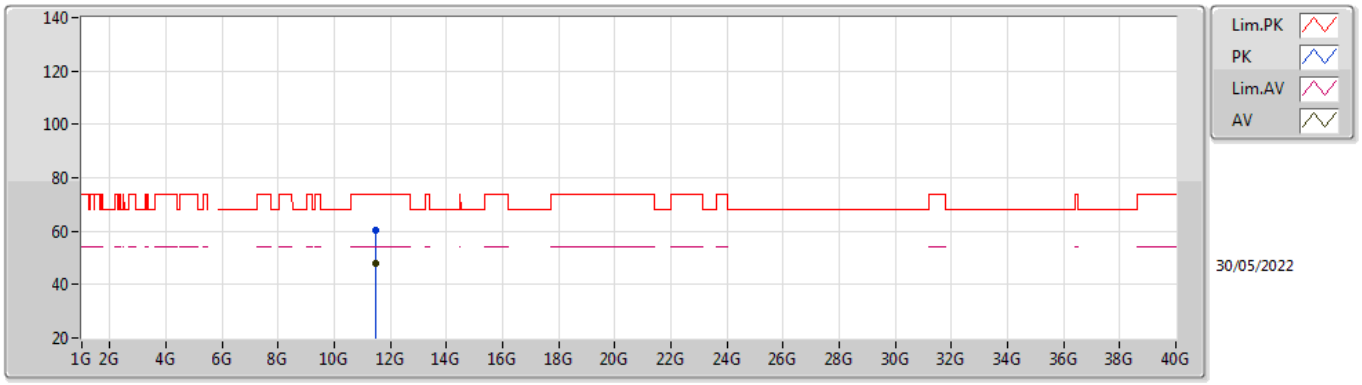


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4532G	60.45	74.00	-13.55	46.37	3	Horizontal	150	2.07	-	38.91	10.72	35.55
AV	11.4552G	47.71	54.00	-6.29	33.63	3	Horizontal	150	2.07	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

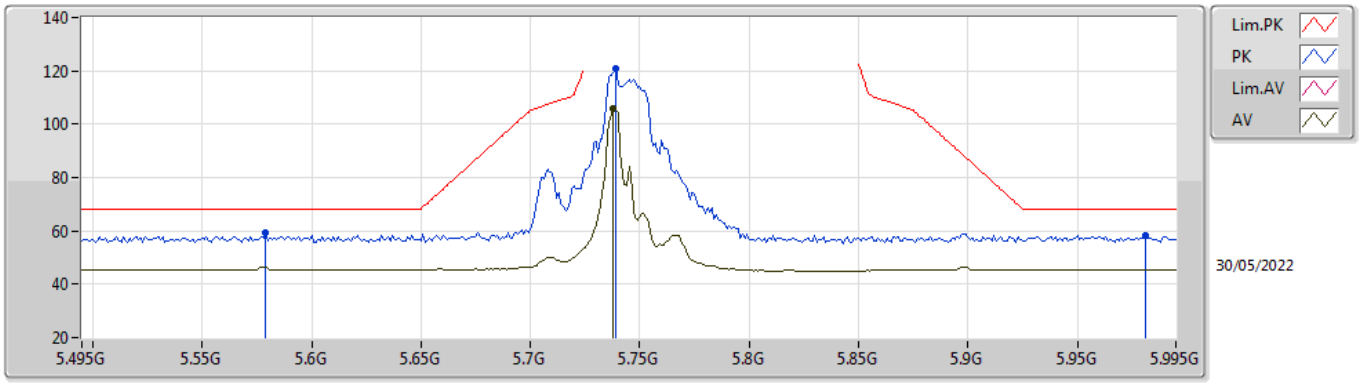


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.579G	59.17	68.20	-9.03	52.58	3	Vertical	177	1.94	-	34.60	7.38	35.39
PK	5.739G	120.89	Inf	-Inf	114.74	3	Vertical	177	1.94	-	34.22	7.40	35.47
AV	5.738G	105.94	Inf	-Inf	99.79	3	Vertical	177	1.94	-	34.22	7.40	35.47
PK	5.981G	58.32	68.20	-9.88	51.53	3	Vertical	177	1.94	-	34.80	7.58	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

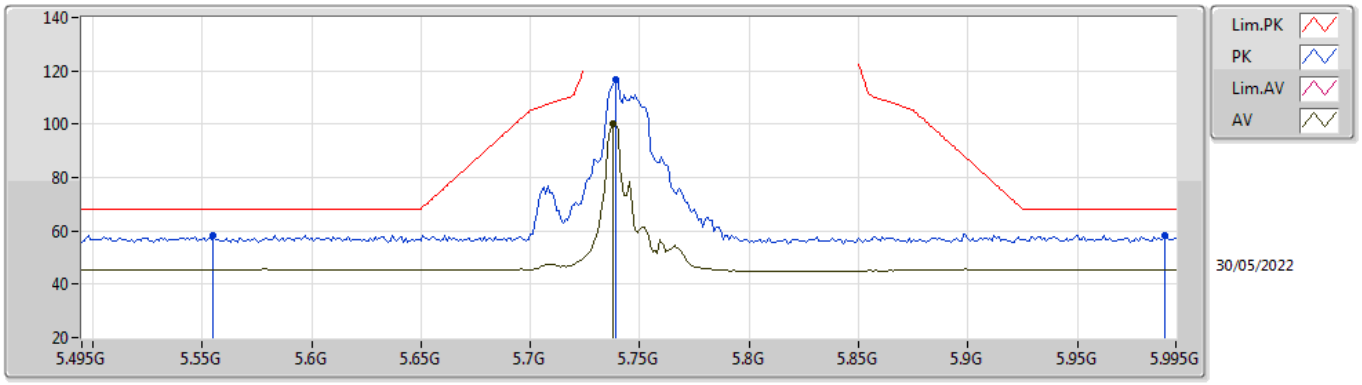


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.555G	58.50	68.20	-9.70	51.92	3	Horizontal	210	1.20	-	34.60	7.36	35.38
PK	5.739G	116.59	Inf	-Inf	110.44	3	Horizontal	210	1.20	-	34.22	7.40	35.47
AV	5.738G	100.27	Inf	-Inf	94.12	3	Horizontal	210	1.20	-	34.22	7.40	35.47
PK	5.99G	58.16	68.20	-10.04	51.36	3	Horizontal	210	1.20	-	34.80	7.59	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

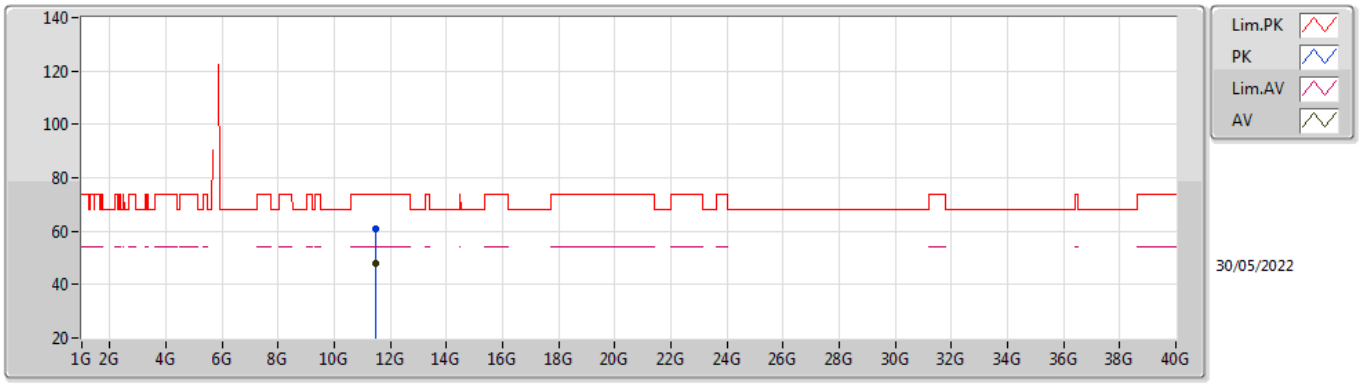


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4772G	60.98	74.00	-13.02	46.88	3	Vertical	173	2.80	-	38.95	10.72	35.57
AV	11.4746G	47.94	54.00	-6.06	33.84	3	Vertical	173	2.80	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

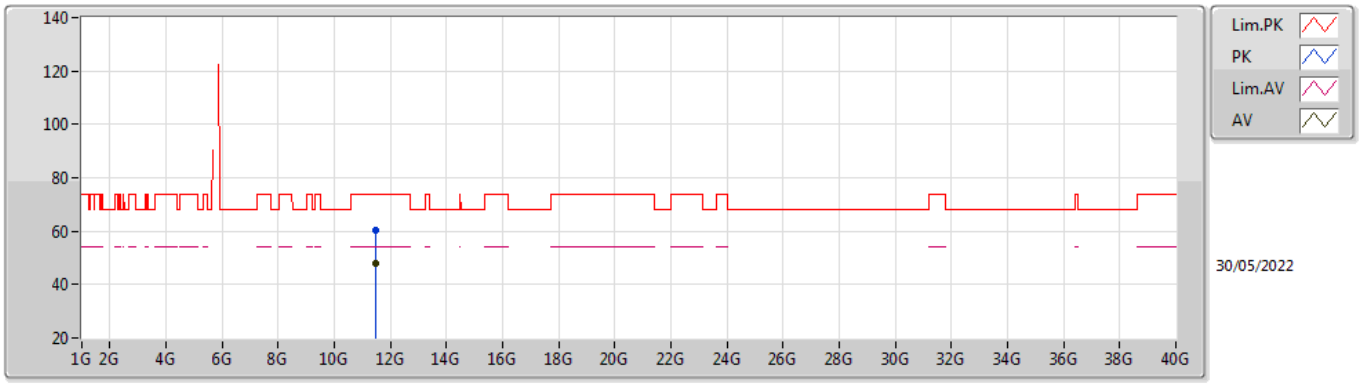


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4756G	60.57	74.00	-13.43	46.47	3	Horizontal	136	2.06	-	38.95	10.72	35.57
AV	11.4756G	48.07	54.00	-5.93	33.97	3	Horizontal	136	2.06	-	38.95	10.72	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

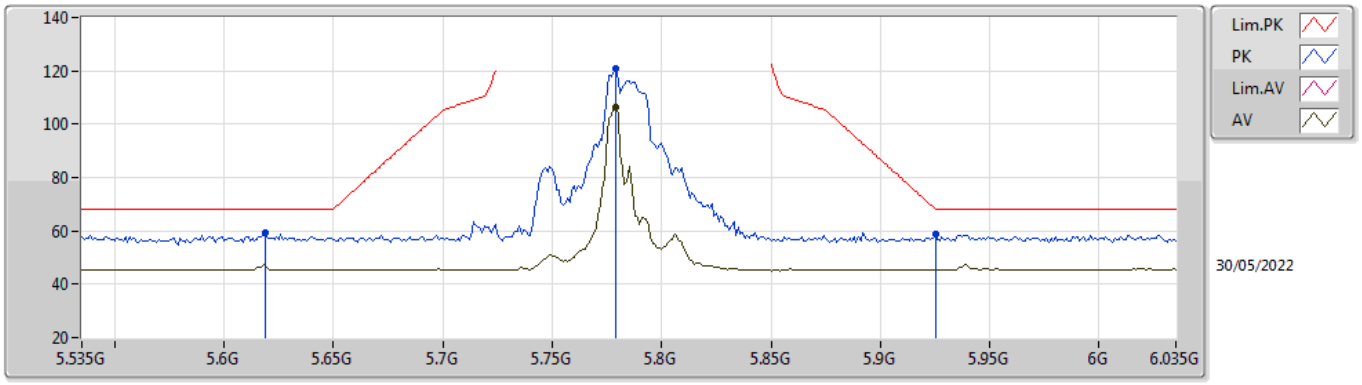


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.619G	59.24	68.20	-8.96	52.69	3	Vertical	176	1.91	-	34.56	7.40	35.41
PK	5.779G	120.75	Inf	-Inf	114.64	3	Vertical	176	1.91	-	34.20	7.40	35.49
AV	5.779G	106.22	Inf	-Inf	100.11	3	Vertical	176	1.91	-	34.20	7.40	35.49
PK	5.925G	58.65	68.20	-9.55	51.98	3	Vertical	176	1.91	-	34.70	7.53	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

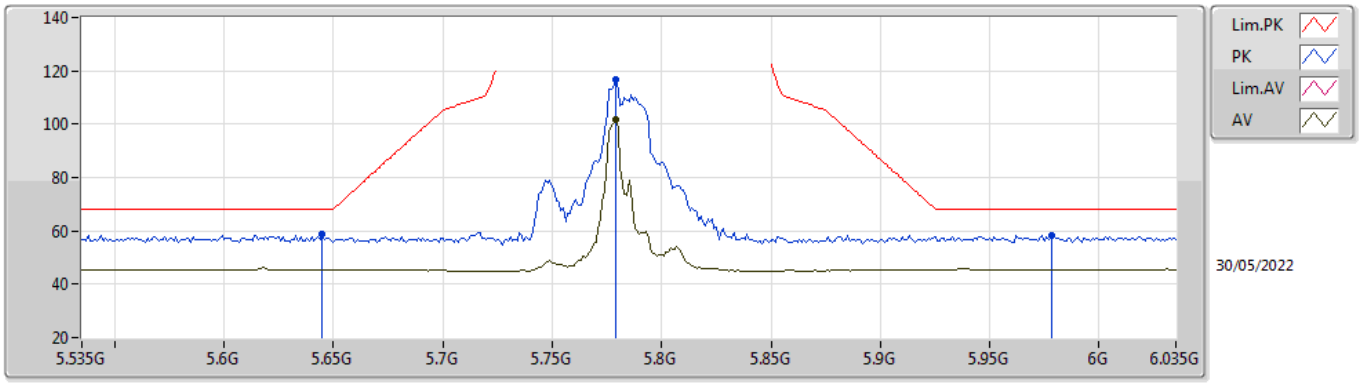


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.645G	59.02	68.20	-9.18	52.53	3	Horizontal	208	1.27	-	34.51	7.40	35.42
PK	5.779G	116.85	Inf	-Inf	110.74	3	Horizontal	208	1.27	-	34.20	7.40	35.49
AV	5.779G	101.56	Inf	-Inf	95.45	3	Horizontal	208	1.27	-	34.20	7.40	35.49
PK	5.978G	58.40	68.20	-9.80	51.61	3	Horizontal	208	1.27	-	34.80	7.58	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

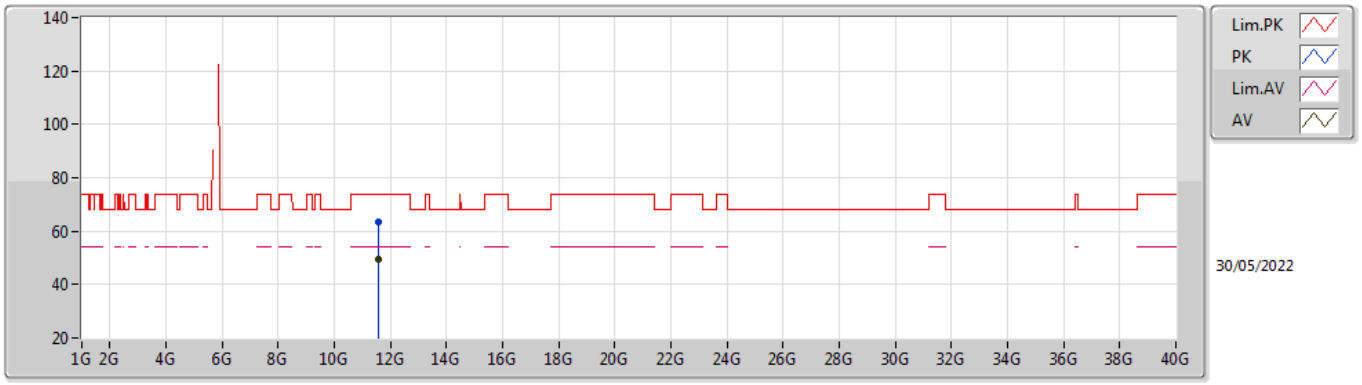


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5546G	63.30	74.00	-10.70	48.94	3	Vertical	177	2.48	-	39.22	10.73	35.59
AV	11.5548G	49.40	54.00	-4.60	35.04	3	Vertical	177	2.48	-	39.22	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

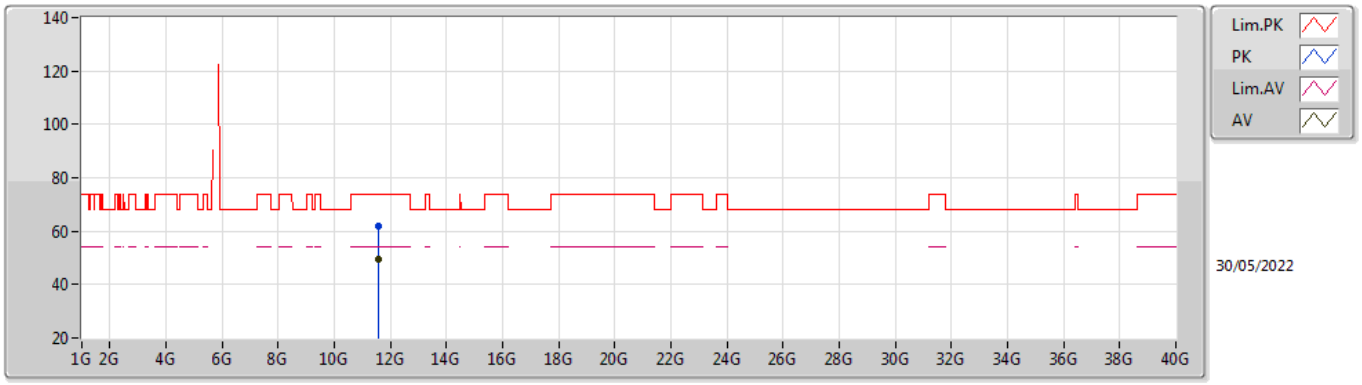


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5556G	61.81	74.00	-12.19	47.45	3	Horizontal	147	2.05	-	39.22	10.73	35.59
AV	11.5556G	49.35	54.00	-4.65	34.99	3	Horizontal	147	2.05	-	39.22	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

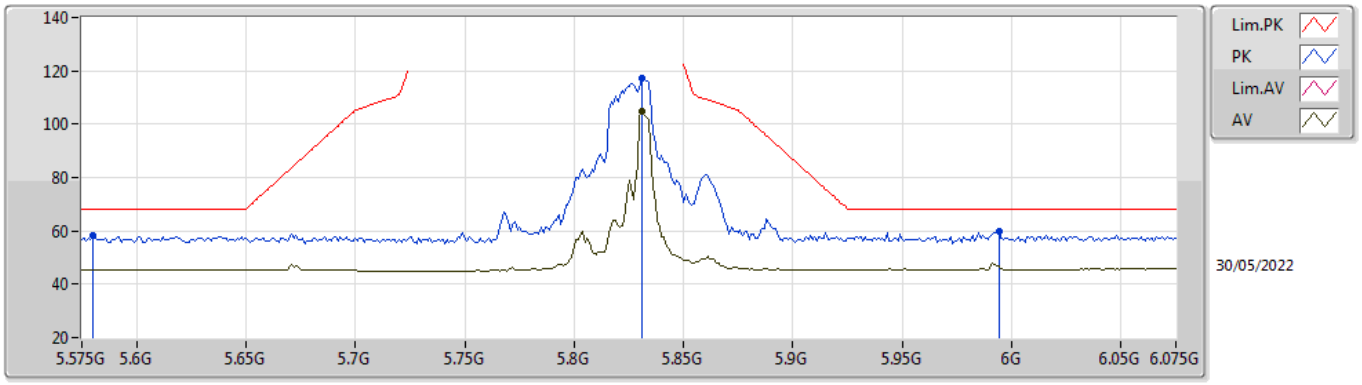


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.58G	58.35	68.20	-9.85	51.76	3	Vertical	180	1.89	-	34.60	7.38	35.39
PK	5.831G	117.44	Inf	-Inf	111.27	3	Vertical	180	1.89	-	34.26	7.43	35.52
AV	5.831G	104.92	Inf	-Inf	98.75	3	Vertical	180	1.89	-	34.26	7.43	35.52
PK	5.994G	59.73	68.20	-8.47	52.94	3	Vertical	180	1.89	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

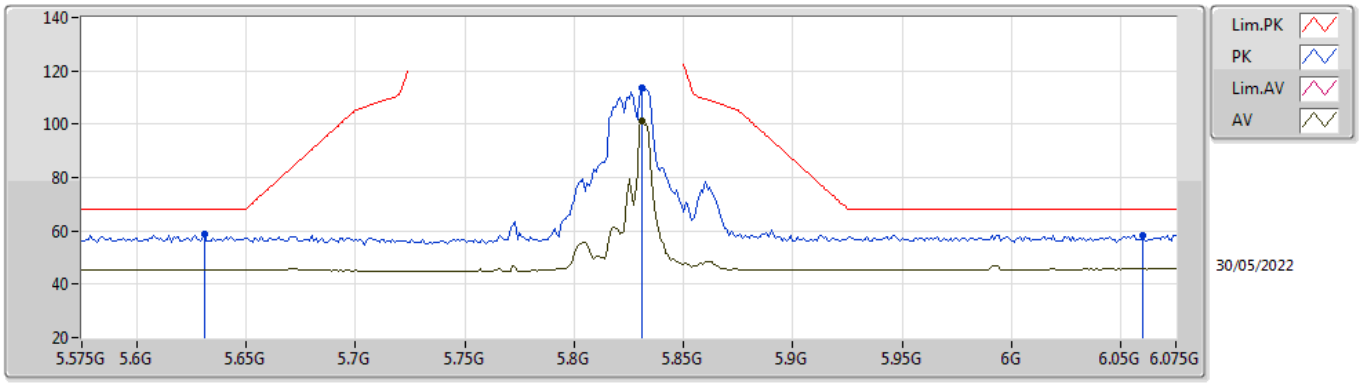


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.631G	58.81	68.20	-9.39	52.29	3	Horizontal	182	3.00	-	34.54	7.40	35.42
PK	5.831G	113.64	Inf	-Inf	107.47	3	Horizontal	182	3.00	-	34.26	7.43	35.52
AV	5.831G	101.44	Inf	-Inf	95.27	3	Horizontal	182	3.00	-	34.26	7.43	35.52
PK	6.06G	58.44	68.20	-9.76	51.47	3	Horizontal	182	3.00	-	34.92	7.63	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

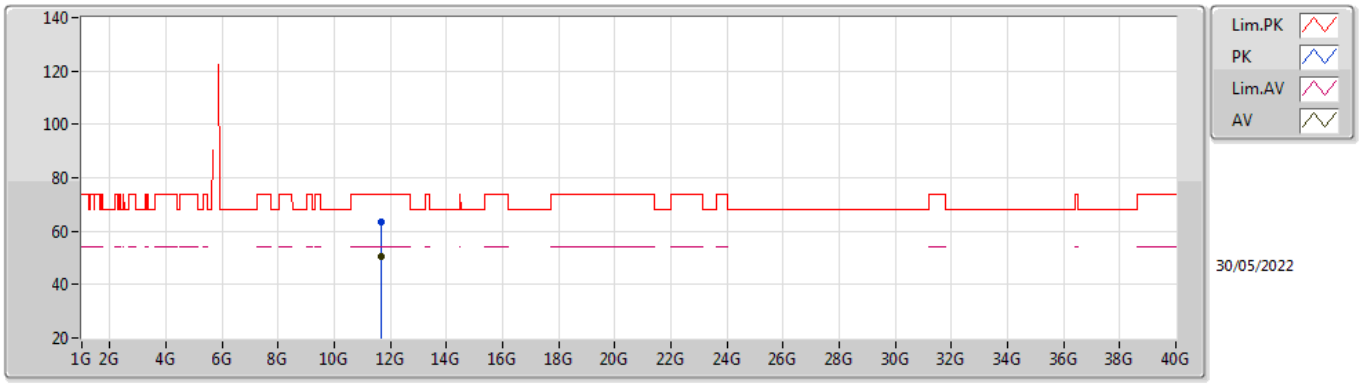


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6646G	63.51	74.00	-10.49	48.92	3	Vertical	173	2.85	-	39.40	10.75	35.56
AV	11.6646G	50.45	54.00	-3.55	35.86	3	Vertical	173	2.85	-	39.40	10.75	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

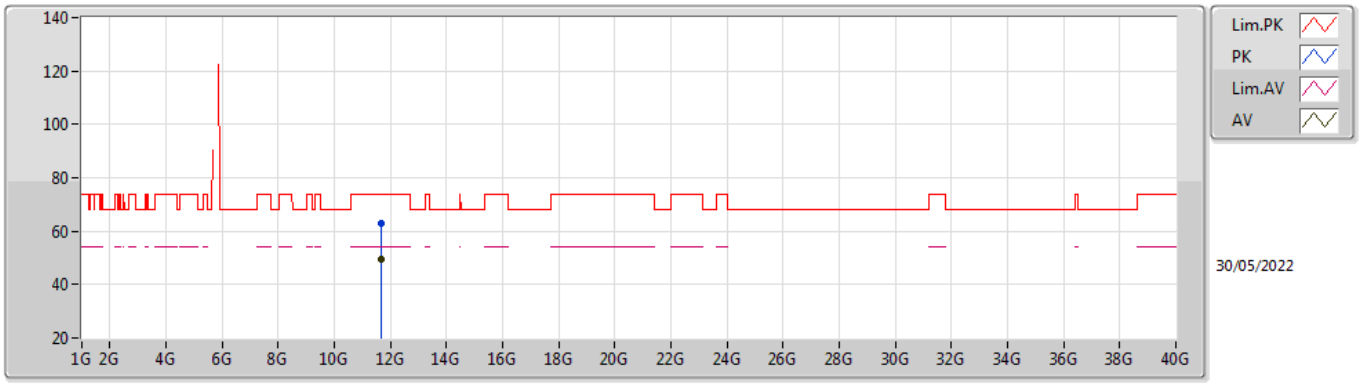

EUT X_2TX
Setting 21.5
03-B-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6652G	62.80	74.00	-11.20	48.21	3	Horizontal	207	2.03	-	39.40	10.75	35.56
AV	11.665G	49.42	54.00	-4.58	34.83	3	Horizontal	207	2.03	-	39.40	10.75	35.56

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.15-5.25GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	PK	5.15G	73.96	74.00	-0.04	3	Horizontal	188	2.19	-

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

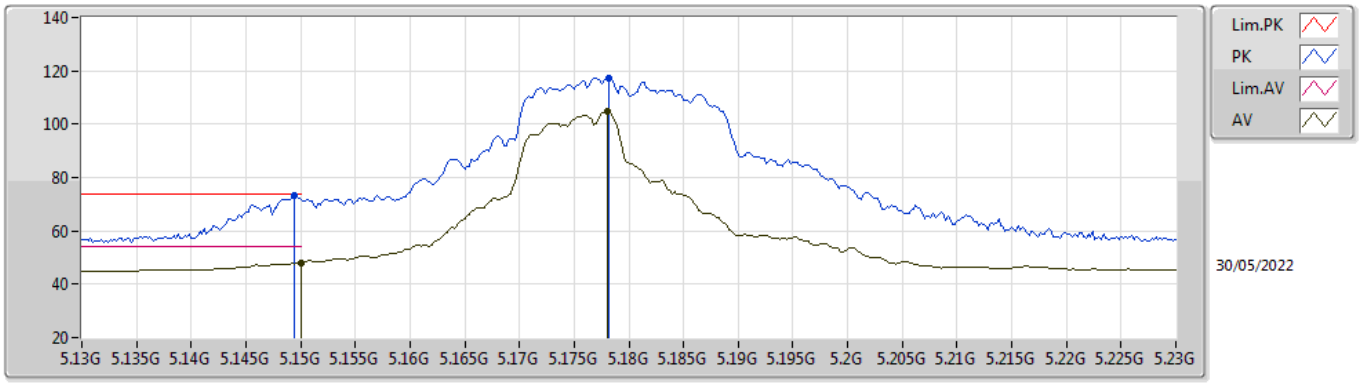


EUT X_2TX
Setting 20.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1494G	73.51	74.00	-0.49	67.68	3	Vertical	159	1.85	-	34.00	7.17	35.34
AV	5.15G	47.96	54.00	-6.04	42.13	3	Vertical	159	1.85	-	34.00	7.17	35.34
PK	5.1782G	117.38	Inf	-Inf	111.42	3	Vertical	159	1.85	-	34.11	7.19	35.34
AV	5.178G	104.59	Inf	-Inf	98.63	3	Vertical	159	1.85	-	34.11	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

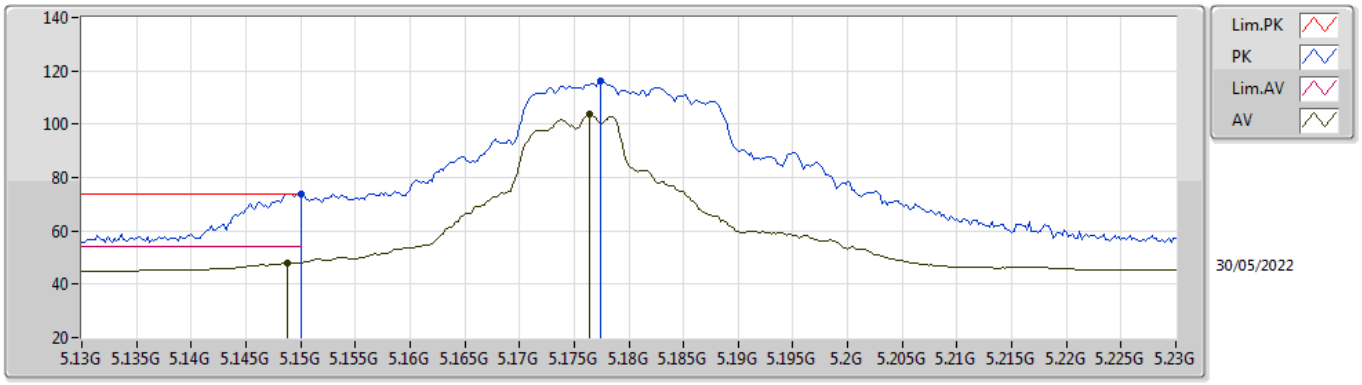


EUT X_2TX
Setting 20.25
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	73.96	74.00	-0.04	68.13	3	Horizontal	188	2.19	-	34.00	7.17	35.34
AV	5.1488G	48.10	54.00	-5.90	42.27	3	Horizontal	188	2.19	-	34.00	7.17	35.34
PK	5.1774G	116.17	Inf	-Inf	110.21	3	Horizontal	188	2.19	-	34.11	7.19	35.34
AV	5.1764G	103.62	Inf	-Inf	97.66	3	Horizontal	188	2.19	-	34.11	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

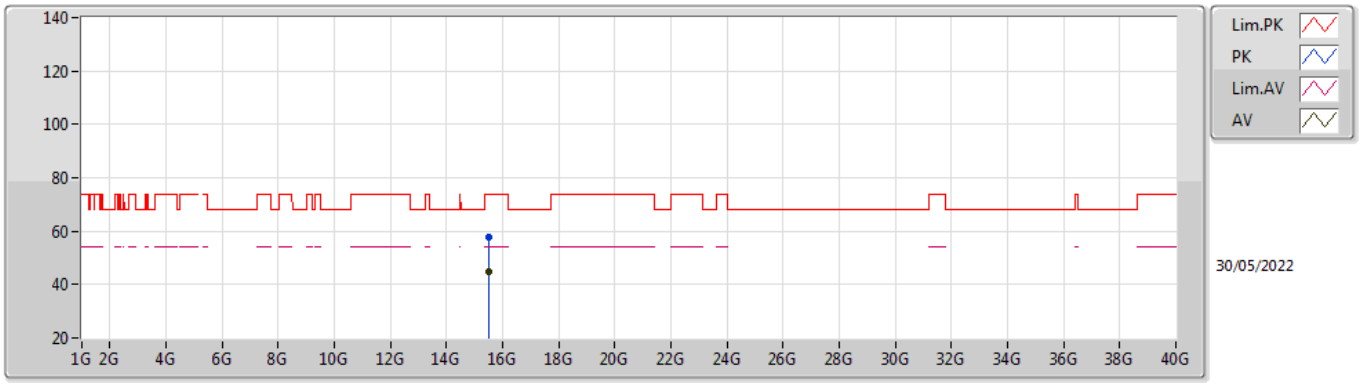


EUT X_2TX
Setting 20.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5074G	57.94	74.00	-16.06	41.52	3	Vertical	150	1.62	-	38.65	13.15	35.38
AV	15.5102G	44.82	54.00	-9.18	28.41	3	Vertical	150	1.62	-	38.63	13.16	35.38

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

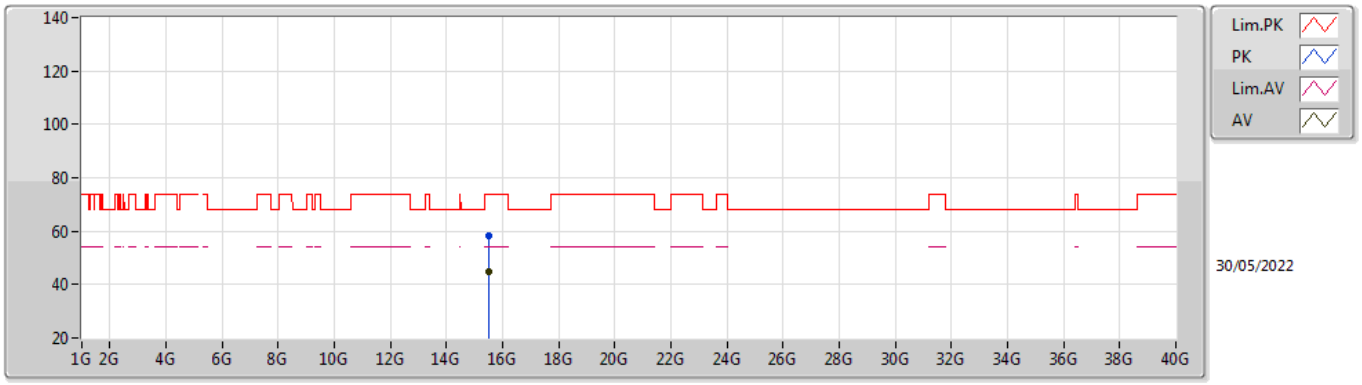


EUT X_2TX
Setting 20.25
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5054G	58.34	74.00	-15.66	41.90	3	Horizontal	332	1.85	-	38.66	13.15	35.37
AV	15.5014G	44.89	54.00	-9.11	28.42	3	Horizontal	332	1.85	-	38.69	13.15	35.37

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

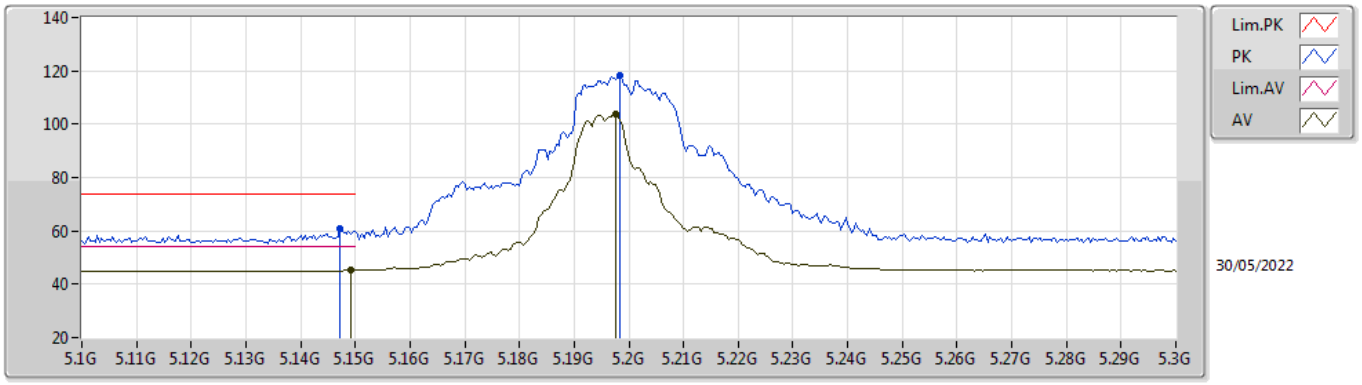


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1472G	61.04	74.00	-12.96	55.22	3	Vertical	158	1.80	-	33.99	7.17	35.34
AV	5.1492G	45.23	54.00	-8.77	39.40	3	Vertical	158	1.80	-	34.00	7.17	35.34
PK	5.1984G	118.10	Inf	-Inf	112.05	3	Vertical	158	1.80	-	34.19	7.20	35.34
AV	5.1976G	103.98	Inf	-Inf	97.93	3	Vertical	158	1.80	-	34.19	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

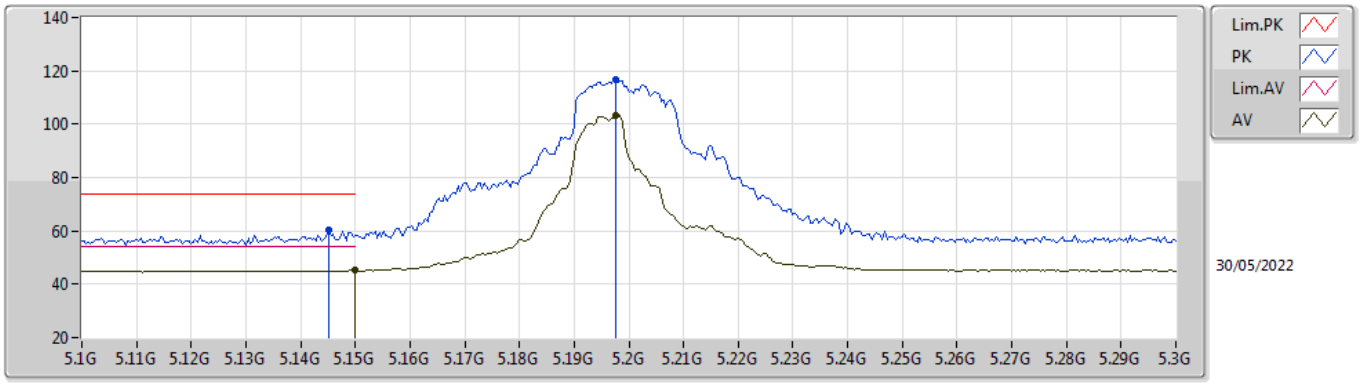


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1452G	60.33	74.00	-13.67	54.51	3	Horizontal	190	2.17	-	33.99	7.17	35.34
AV	5.15G	45.10	54.00	-8.90	39.27	3	Horizontal	190	2.17	-	34.00	7.17	35.34
PK	5.1976G	116.79	Inf	-Inf	110.74	3	Horizontal	190	2.17	-	34.19	7.20	35.34
AV	5.1976G	103.26	Inf	-Inf	97.21	3	Horizontal	190	2.17	-	34.19	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

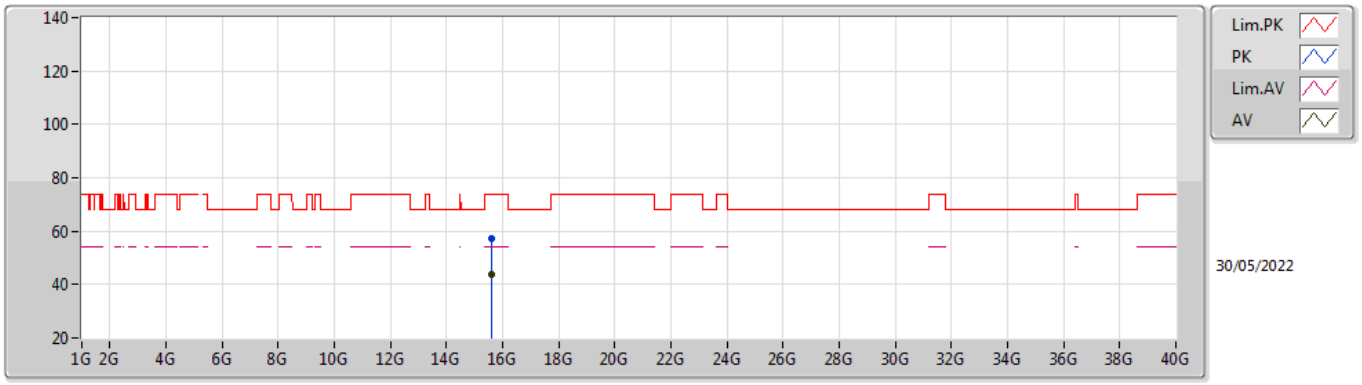


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.623G	57.34	74.00	-16.66	41.71	3	Vertical	341	2.91	-	37.89	13.21	35.47
AV	15.5954G	43.97	54.00	-10.03	28.19	3	Vertical	341	2.91	-	38.03	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

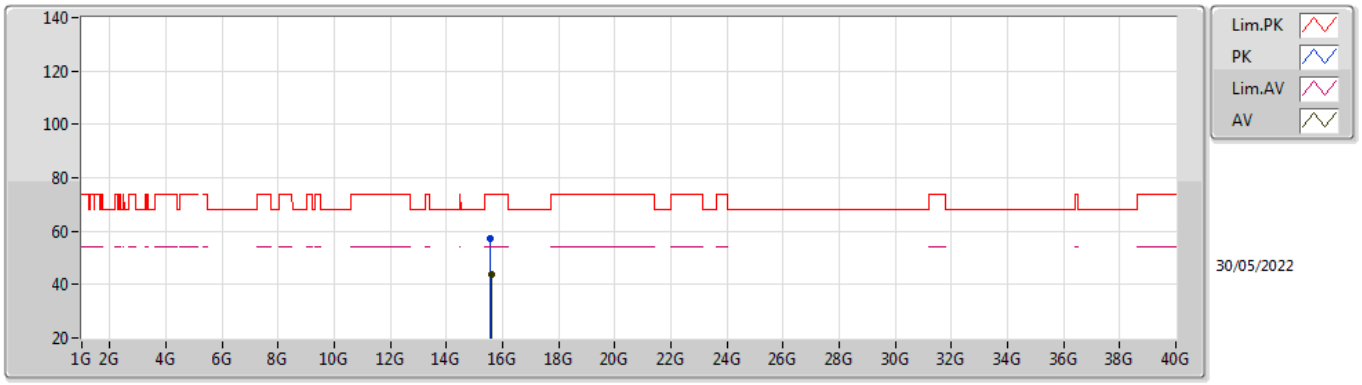


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5768G	57.32	74.00	-16.68	41.40	3	Horizontal	266	1.21	-	38.16	13.19	35.43
AV	15.5948G	44.01	54.00	-9.99	28.22	3	Horizontal	266	1.21	-	38.04	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

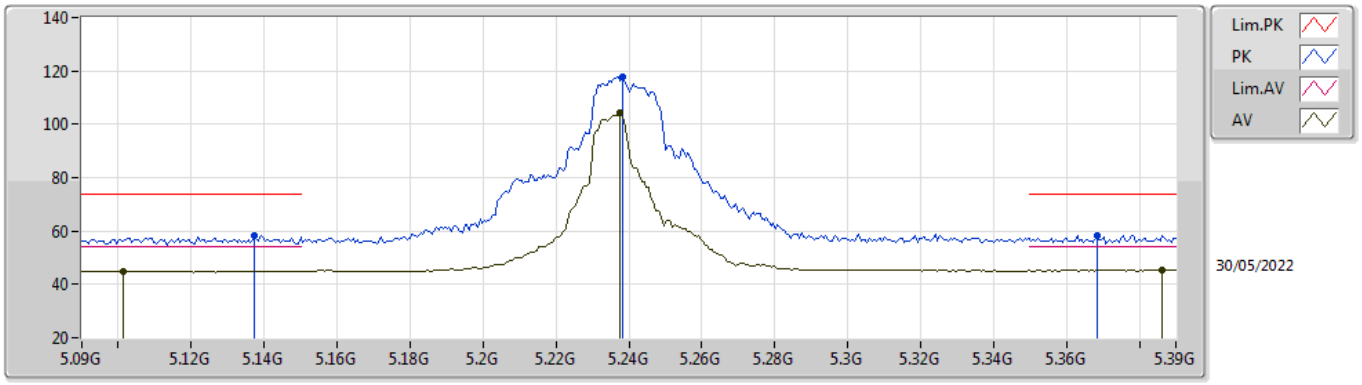


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1374G	58.05	74.00	-15.95	52.25	3	Vertical	160	1.80	-	33.97	7.17	35.34
AV	5.1014G	44.87	54.00	-9.13	39.15	3	Vertical	160	1.80	-	33.90	7.15	35.33
PK	5.2382G	117.89	Inf	-Inf	111.68	3	Vertical	160	1.80	-	34.35	7.20	35.34
AV	5.2376G	104.09	Inf	-Inf	97.88	3	Vertical	160	1.80	-	34.35	7.20	35.34
PK	5.3684G	58.35	74.00	-15.65	51.95	3	Vertical	160	1.80	-	34.54	7.20	35.34
AV	5.3864G	45.25	54.00	-8.75	38.83	3	Vertical	160	1.80	-	34.57	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

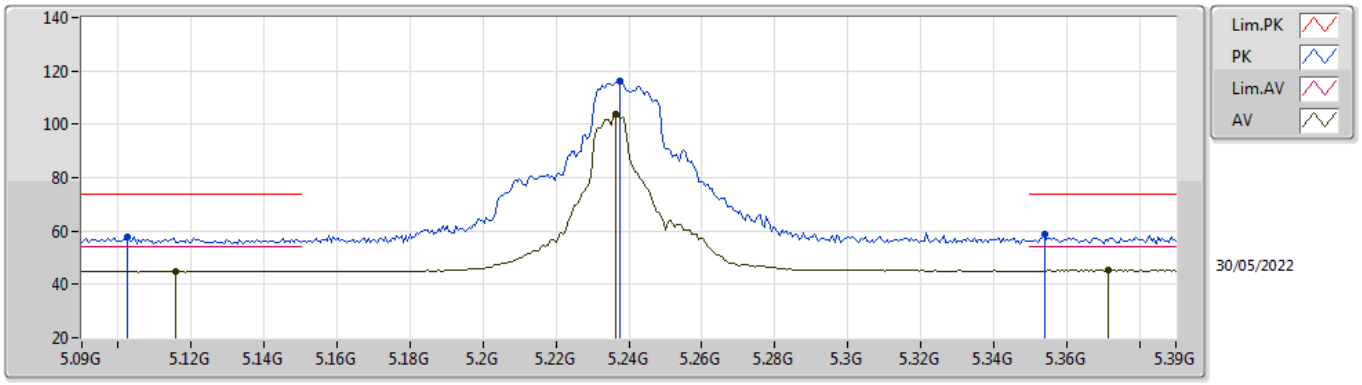


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1026G	57.81	74.00	-16.19	52.08	3	Horizontal	188	2.14	-	33.91	7.15	35.33
AV	5.1158G	44.81	54.00	-9.19	39.05	3	Horizontal	188	2.14	-	33.93	7.16	35.33
PK	5.2376G	116.07	Inf	-Inf	109.86	3	Horizontal	188	2.14	-	34.35	7.20	35.34
AV	5.2364G	103.97	Inf	-Inf	97.76	3	Horizontal	188	2.14	-	34.35	7.20	35.34
PK	5.354G	58.65	74.00	-15.35	52.28	3	Horizontal	188	2.14	-	34.51	7.20	35.34
AV	5.3714G	45.22	54.00	-8.78	38.82	3	Horizontal	188	2.14	-	34.54	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

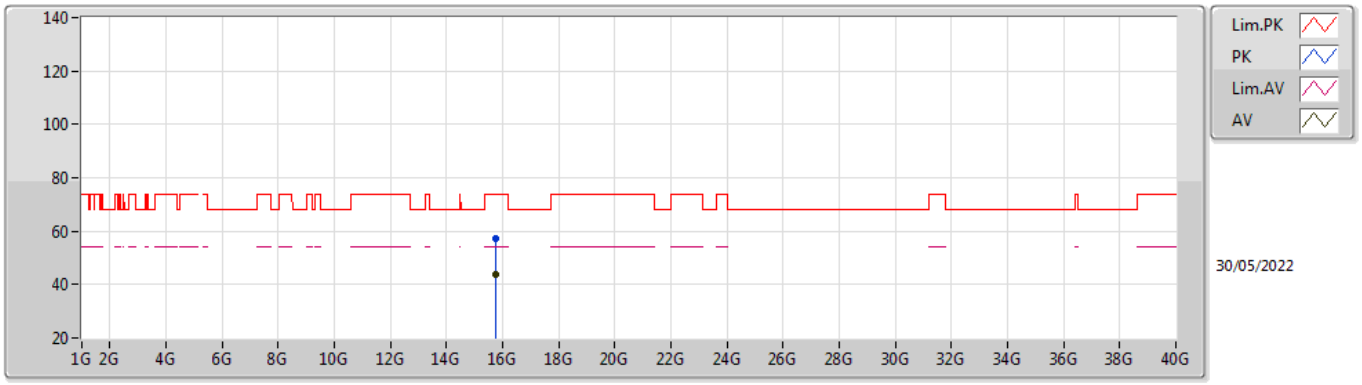


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7608G	57.32	74.00	-16.68	41.89	3	Vertical	332	1.34	-	37.74	13.28	35.59
AV	15.7686G	43.86	54.00	-10.14	28.41	3	Vertical	332	1.34	-	37.77	13.28	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

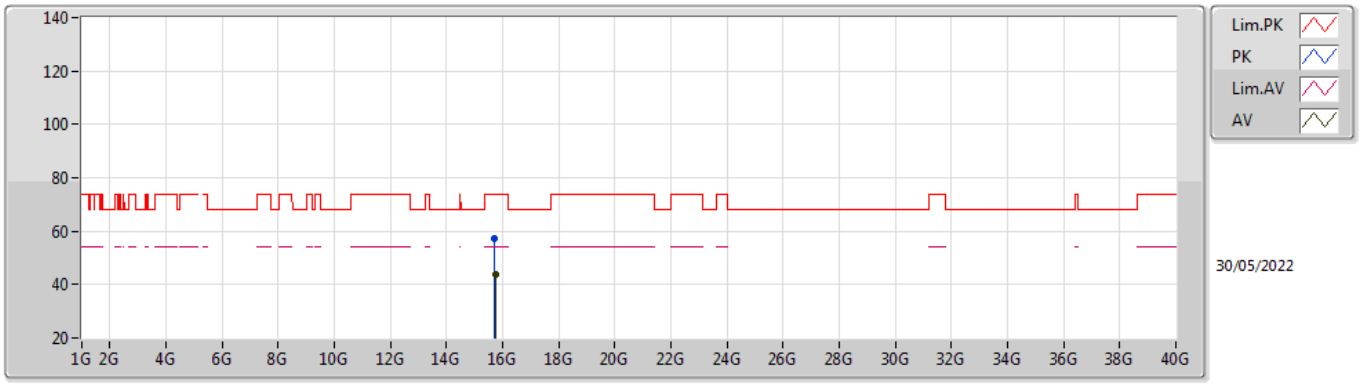


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.703G	57.12	74.00	-16.88	41.90	3	Horizontal	356	2.75	-	37.51	13.25	35.54
AV	15.7694G	43.87	54.00	-10.13	28.41	3	Horizontal	356	2.75	-	37.78	13.28	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

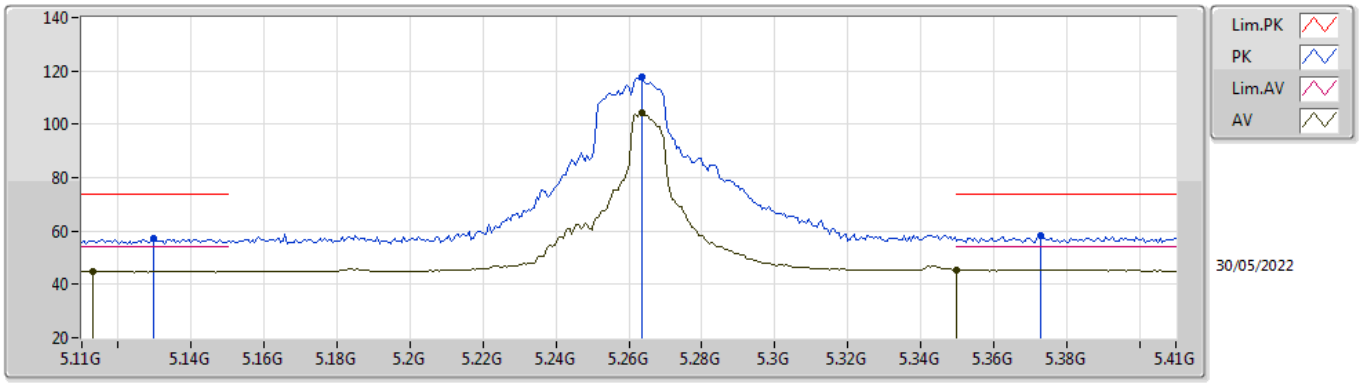


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1298G	57.31	74.00	-16.69	51.53	3	Vertical	156	1.80	-	33.96	7.16	35.34
AV	5.113G	44.85	54.00	-9.15	39.09	3	Vertical	156	1.80	-	33.93	7.16	35.33
PK	5.2636G	117.57	Inf	-Inf	111.28	3	Vertical	156	1.80	-	34.43	7.20	35.34
AV	5.2636G	104.29	Inf	-Inf	98.00	3	Vertical	156	1.80	-	34.43	7.20	35.34
PK	5.3728G	58.09	74.00	-15.91	51.68	3	Vertical	156	1.80	-	34.55	7.20	35.34
AV	5.35G	45.33	54.00	-8.67	38.97	3	Vertical	156	1.80	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

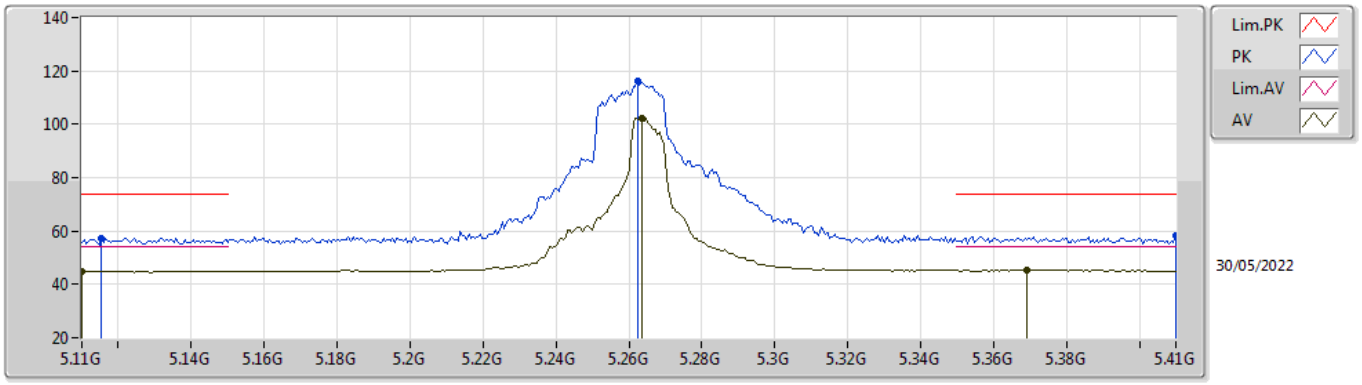


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1154G	57.42	74.00	-16.58	51.66	3	Horizontal	188	1.92	-	33.93	7.16	35.33
AV	5.11G	44.81	54.00	-9.19	39.06	3	Horizontal	188	1.92	-	33.92	7.16	35.33
PK	5.2624G	116.34	Inf	-Inf	110.06	3	Horizontal	188	1.92	-	34.42	7.20	35.34
AV	5.2636G	102.20	Inf	-Inf	95.91	3	Horizontal	188	1.92	-	34.43	7.20	35.34
PK	5.41G	58.02	74.00	-15.98	51.58	3	Horizontal	188	1.92	-	34.58	7.21	35.35
AV	5.3692G	45.27	54.00	-8.73	38.87	3	Horizontal	188	1.92	-	34.54	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

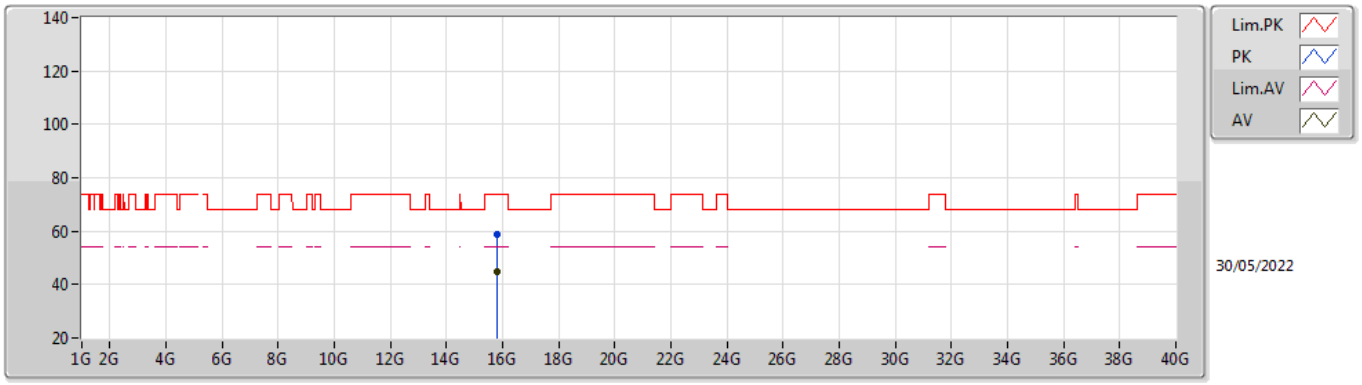


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7978G	58.67	74.00	-15.33	43.10	3	Vertical	160	1.80	-	37.89	13.30	35.62
AV	15.7928G	44.92	54.00	-9.08	29.37	3	Vertical	160	1.80	-	37.87	13.30	35.62

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

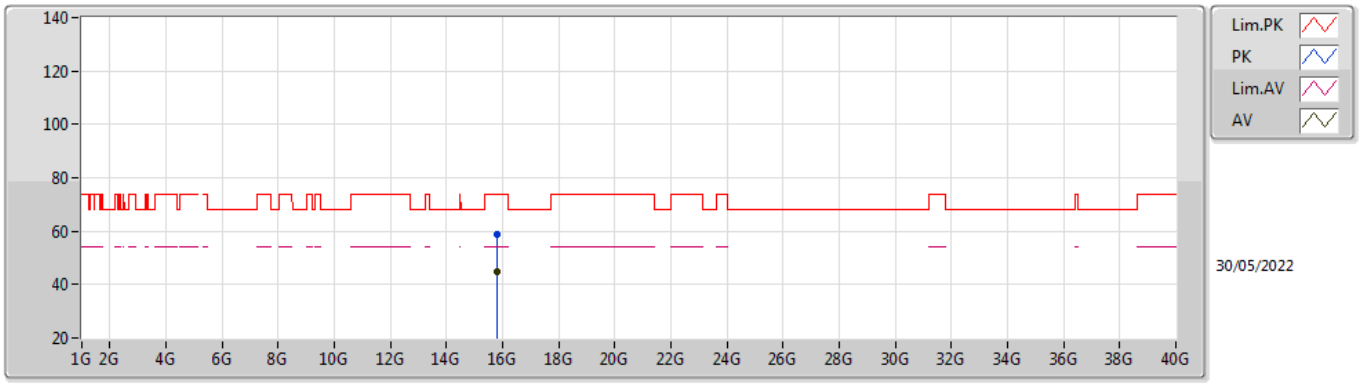


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7926G	58.76	74.00	-15.24	43.21	3	Horizontal	234	1.75	-	37.87	13.30	35.62
AV	15.7946G	44.64	54.00	-9.36	29.08	3	Horizontal	234	1.75	-	37.88	13.30	35.62

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

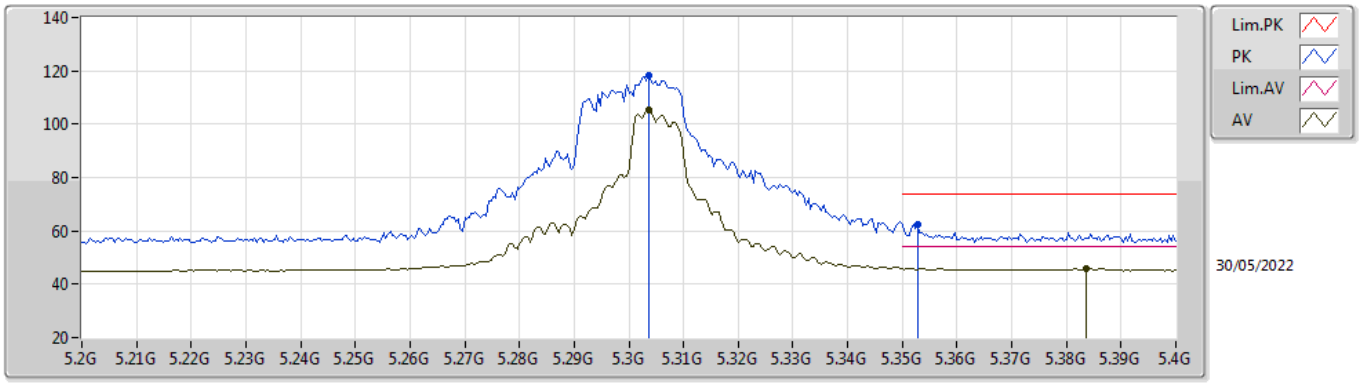


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3036G	118.04	Inf	-Inf	111.68	3	Vertical	155	1.76	-	34.50	7.20	35.34
AV	5.3036G	105.10	Inf	-Inf	98.74	3	Vertical	155	1.76	-	34.50	7.20	35.34
PK	5.3528G	62.47	74.00	-11.53	56.10	3	Vertical	155	1.76	-	34.51	7.20	35.34
AV	5.3836G	45.91	54.00	-8.09	39.49	3	Vertical	155	1.76	-	34.57	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

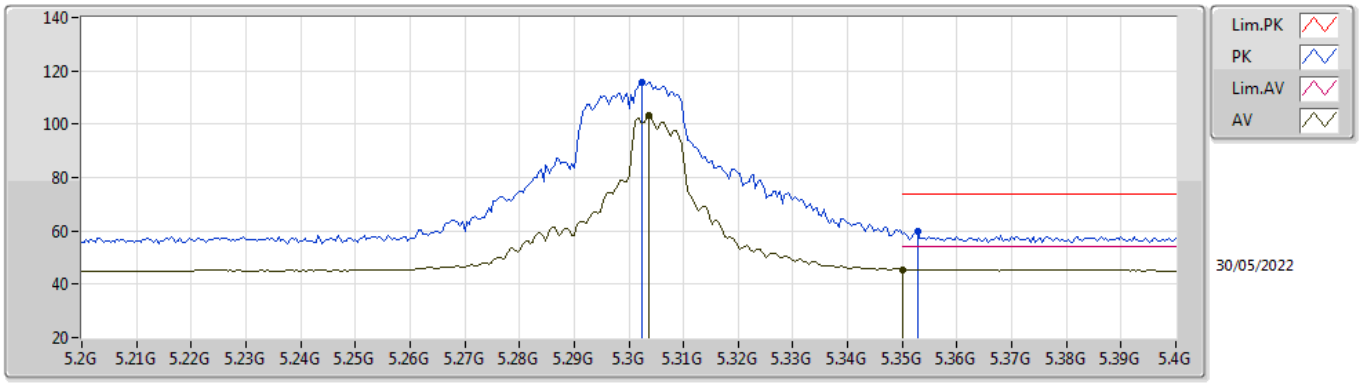


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3024G	115.88	Inf	-Inf	109.52	3	Horizontal	187	1.55	-	34.50	7.20	35.34
AV	5.3036G	103.24	Inf	-Inf	96.88	3	Horizontal	187	1.55	-	34.50	7.20	35.34
PK	5.3528G	59.58	74.00	-14.42	53.21	3	Horizontal	187	1.55	-	34.51	7.20	35.34
AV	5.35G	45.59	54.00	-8.41	39.23	3	Horizontal	187	1.55	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

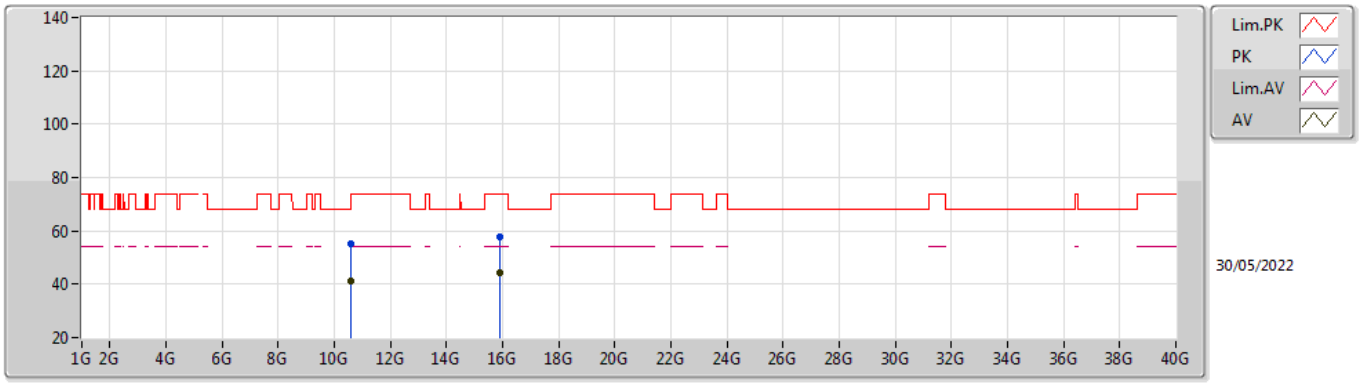


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6086G	55.18	74.00	-18.82	41.75	3	Vertical	76	1.80	-	38.22	10.59	35.38
AV	10.6084G	41.07	54.00	-12.93	27.64	3	Vertical	76	1.80	-	38.22	10.59	35.38
PK	15.8934G	58.00	74.00	-16.00	42.73	3	Vertical	172	2.29	-	37.62	13.35	35.70
AV	15.9098G	44.28	54.00	-9.72	29.06	3	Vertical	172	2.29	-	37.58	13.35	35.71

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

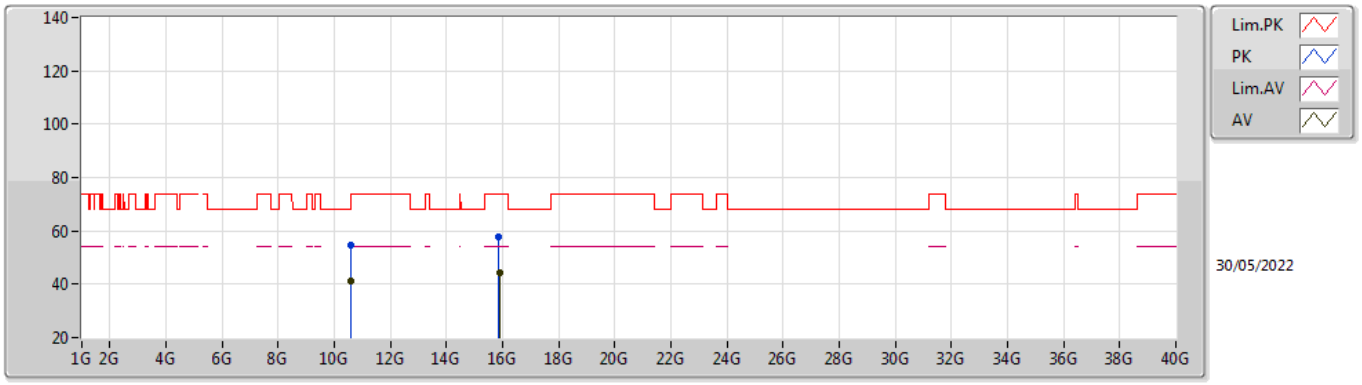


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6098G	54.83	74.00	-19.17	41.40	3	Horizontal	148	1.74	-	38.22	10.59	35.38
AV	10.6094G	41.27	54.00	-12.73	27.84	3	Horizontal	148	1.74	-	38.22	10.59	35.38
PK	15.8536G	57.58	74.00	-16.42	42.18	3	Horizontal	35	2.03	-	37.74	13.33	35.67
AV	15.9094G	44.36	54.00	-9.64	29.14	3	Horizontal	35	2.03	-	37.58	13.35	35.71

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

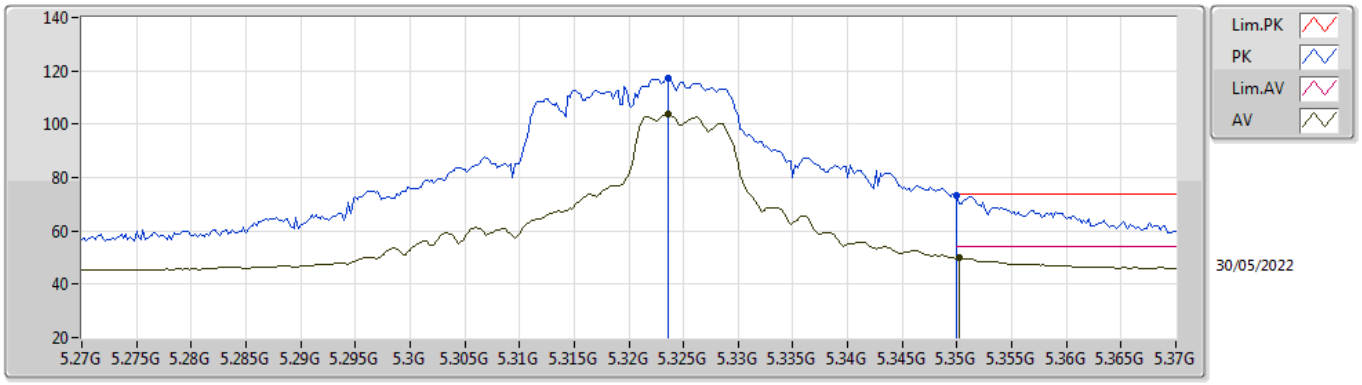


EUT X_2TX
Setting 18.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3236G	116.99	Inf	-Inf	110.63	3	Vertical	156	1.85	-	34.50	7.20	35.34
AV	5.3236G	103.85	Inf	-Inf	97.49	3	Vertical	156	1.85	-	34.50	7.20	35.34
PK	5.35G	73.36	74.00	-0.64	67.00	3	Vertical	156	1.85	-	34.50	7.20	35.34
AV	5.3502G	49.81	54.00	-4.19	43.45	3	Vertical	156	1.85	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

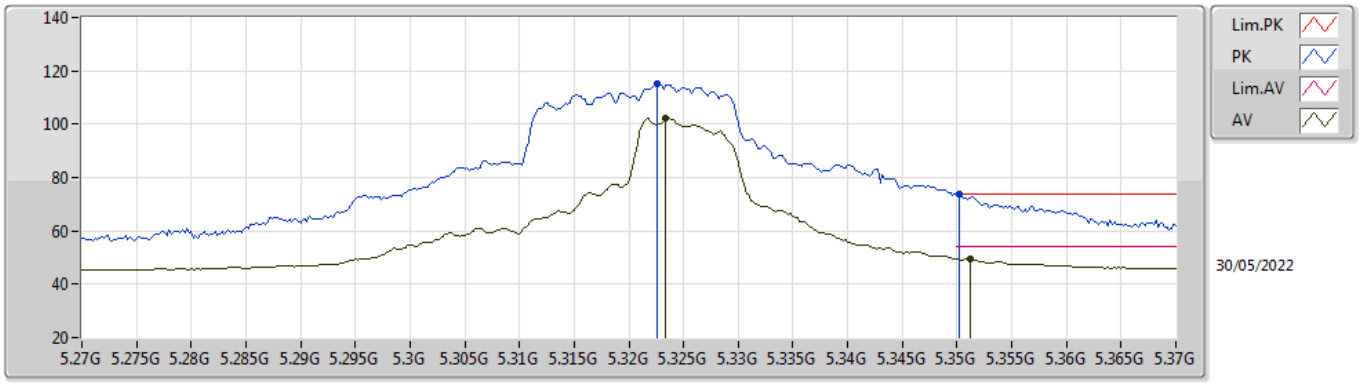


EUT X_2TX
Setting 18.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3226G	115.35	Inf	-Inf	108.99	3	Horizontal	189	2.08	-	34.50	7.20	35.34
AV	5.3234G	102.45	Inf	-Inf	96.09	3	Horizontal	189	2.08	-	34.50	7.20	35.34
PK	5.3502G	73.93	74.00	-0.07	67.57	3	Horizontal	189	2.08	-	34.50	7.20	35.34
AV	5.3512G	49.61	54.00	-4.39	43.25	3	Horizontal	189	2.08	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

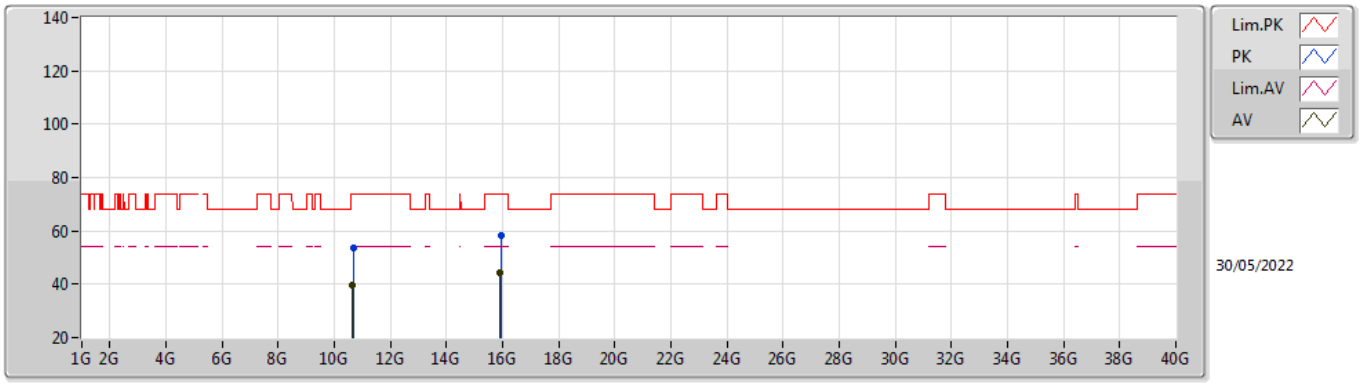


EUT X_2TX
Setting 18.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6872G	53.37	74.00	-20.63	39.71	3	Vertical	219	1.40	-	38.37	10.60	35.31
AV	10.6566G	39.49	54.00	-14.51	25.92	3	Vertical	219	1.40	-	38.31	10.60	35.34
PK	15.9574G	58.24	74.00	-15.76	43.12	3	Vertical	88	1.42	-	37.49	13.38	35.75
AV	15.9114G	44.25	54.00	-9.75	29.03	3	Vertical	88	1.42	-	37.58	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

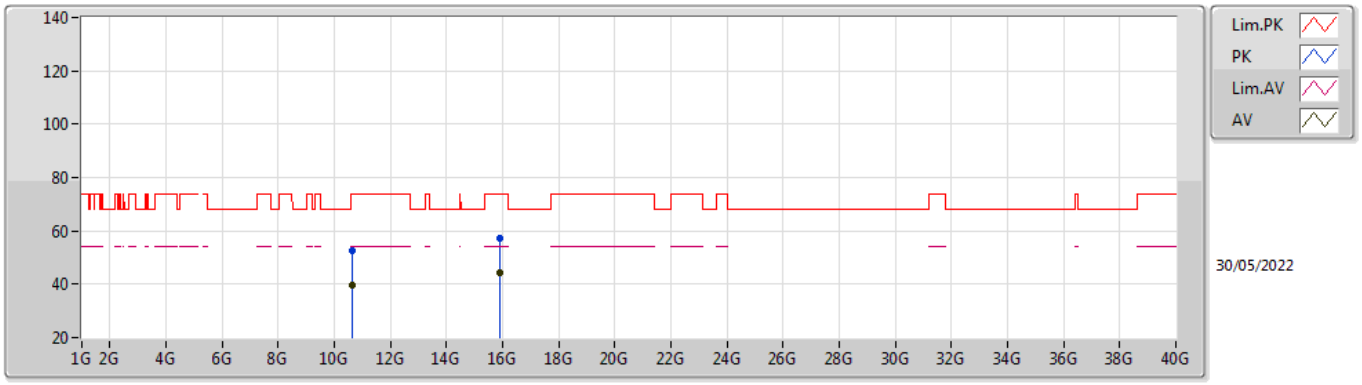


EUT X_2TX
Setting 18.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.639G	52.75	74.00	-21.25	39.22	3	Horizontal	279	1.13	-	38.28	10.60	35.35
AV	10.656G	39.48	54.00	-14.52	25.91	3	Horizontal	279	1.13	-	38.31	10.60	35.34
PK	15.9138G	57.26	74.00	-16.74	42.05	3	Horizontal	267	1.25	-	37.57	13.36	35.72
AV	15.9148G	44.14	54.00	-9.86	28.93	3	Horizontal	267	1.25	-	37.57	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

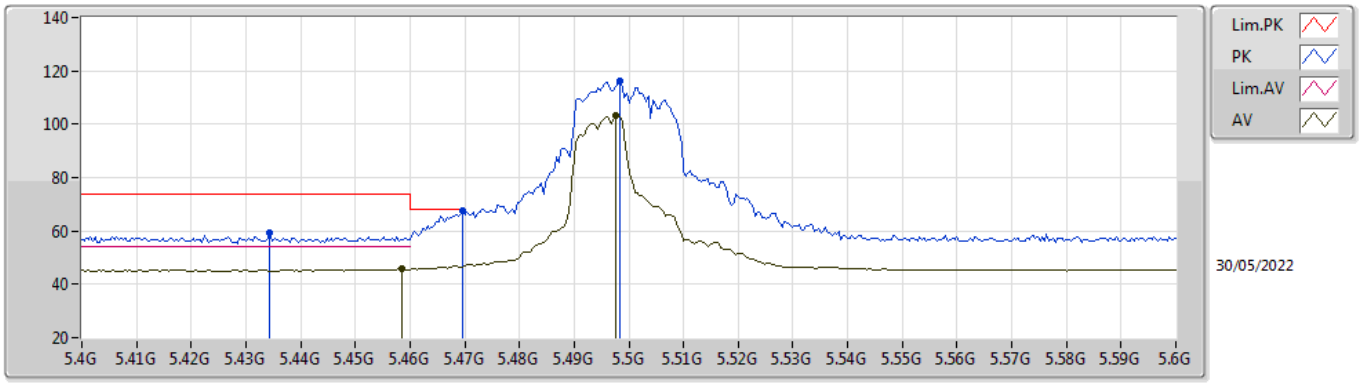


EUT X_2TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4344G	59.23	74.00	-14.77	52.82	3	Vertical	82	1.76	-	34.53	7.23	35.35
PK	5.4696G	67.72	68.20	-0.48	61.26	3	Vertical	82	1.76	-	34.54	7.27	35.35
AV	5.4584G	45.81	54.00	-8.19	39.38	3	Vertical	82	1.76	-	34.52	7.26	35.35
PK	5.4984G	115.95	Inf	-Inf	109.40	3	Vertical	82	1.76	-	34.60	7.30	35.35
AV	5.4976G	103.11	Inf	-Inf	96.56	3	Vertical	82	1.76	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

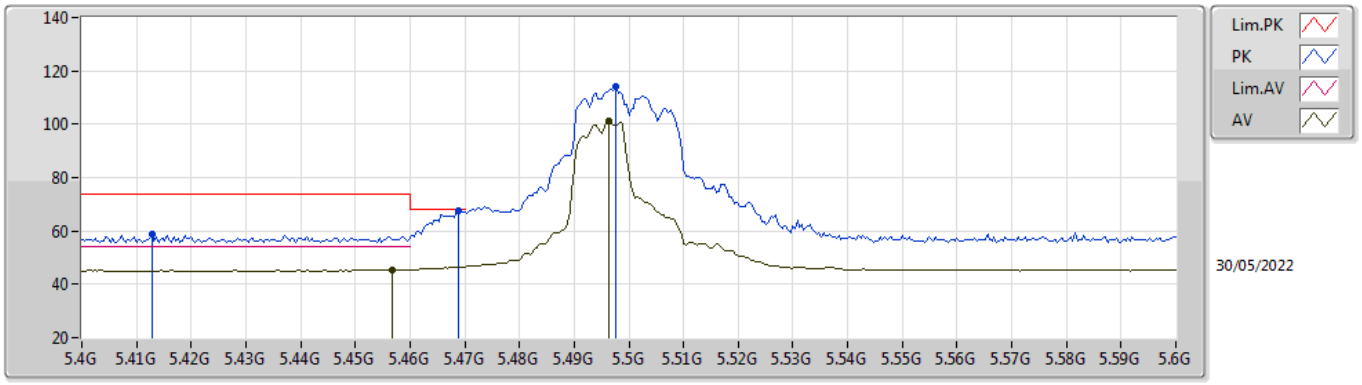


EUT X_2TX
Setting 18
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4128G	58.90	74.00	-15.10	52.47	3	Horizontal	186	2.77	-	34.57	7.21	35.35
PK	5.4688G	67.34	68.20	-0.86	60.88	3	Horizontal	186	2.77	-	34.54	7.27	35.35
AV	5.4568G	45.46	54.00	-8.54	39.04	3	Horizontal	186	2.77	-	34.51	7.26	35.35
PK	5.4976G	114.24	Inf	-Inf	107.69	3	Horizontal	186	2.77	-	34.60	7.30	35.35
AV	5.4964G	101.46	Inf	-Inf	94.92	3	Horizontal	186	2.77	-	34.59	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

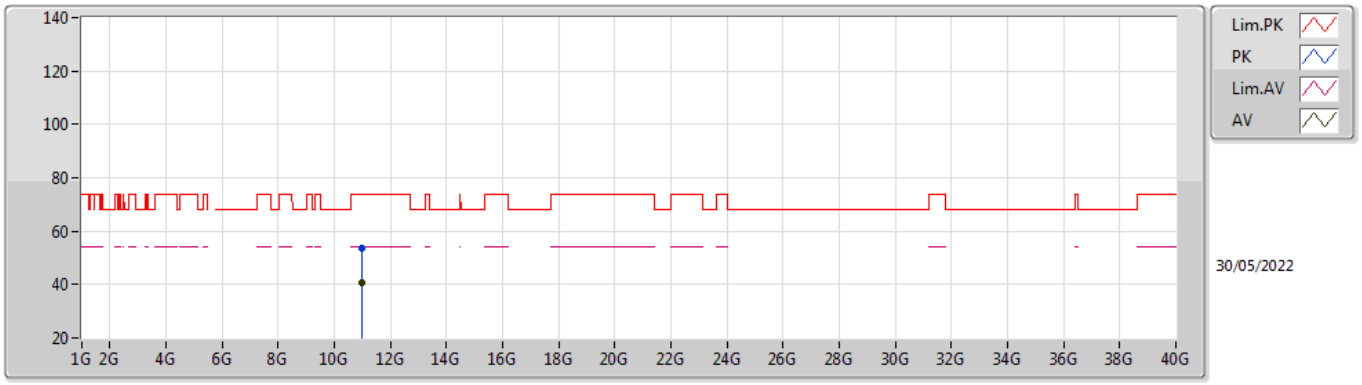


EUT X_2TX
Setting 18
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9694G	53.62	74.00	-20.38	39.67	3	Vertical	294	1.94	-	38.37	10.65	35.07
AV	10.996G	40.74	54.00	-13.26	26.73	3	Vertical	294	1.94	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

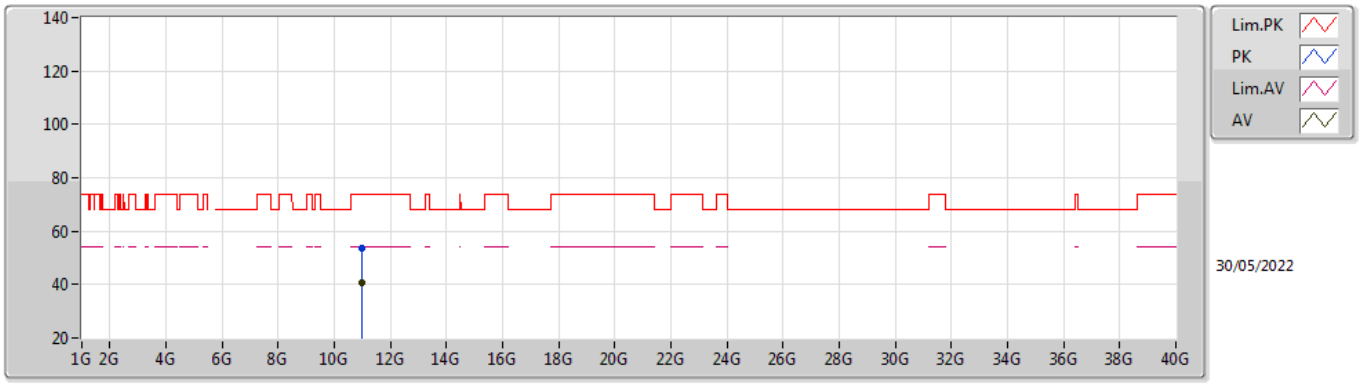


EUT X_2TX
Setting 18
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.9886G	53.70	74.00	-20.30	39.71	3	Horizontal	260	2.38	-	38.39	10.65	35.05
AV	10.989G	40.69	54.00	-13.31	26.70	3	Horizontal	260	2.38	-	38.39	10.65	35.05

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

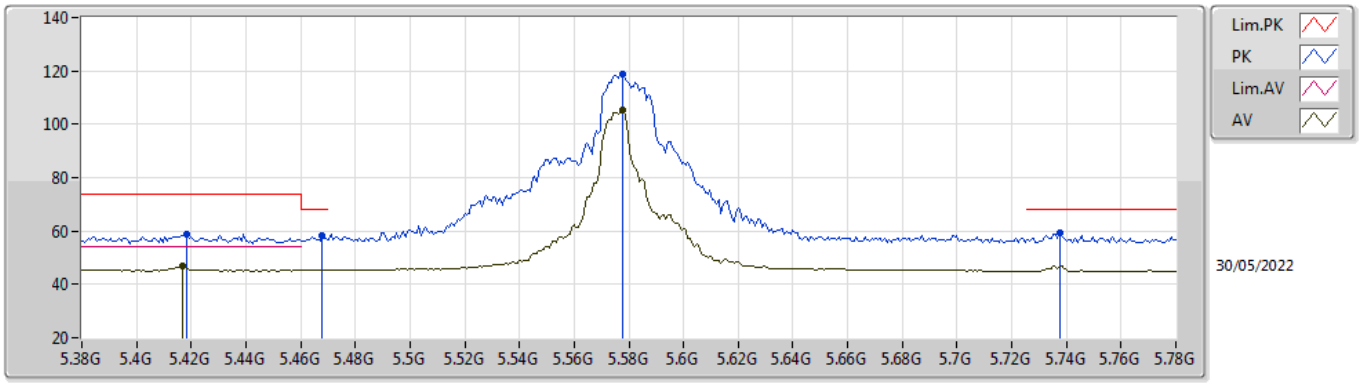


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4184G	58.70	74.00	-15.30	52.27	3	Vertical	174	1.80	-	34.56	7.22	35.35
AV	5.4168G	46.96	54.00	-7.04	40.52	3	Vertical	174	1.80	-	34.57	7.22	35.35
PK	5.468G	58.29	68.20	-9.91	51.83	3	Vertical	174	1.80	-	34.54	7.27	35.35
PK	5.5776G	118.69	Inf	-Inf	112.10	3	Vertical	174	1.80	-	34.60	7.38	35.39
AV	5.5776G	105.60	Inf	-Inf	99.01	3	Vertical	174	1.80	-	34.60	7.38	35.39
PK	5.7376G	59.25	68.20	-8.95	53.10	3	Vertical	174	1.80	-	34.22	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

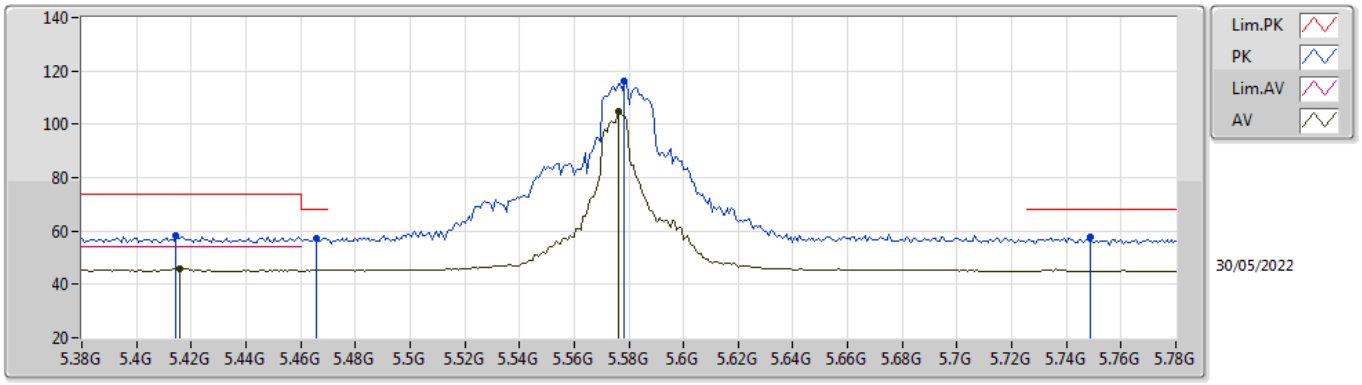


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4144G	58.21	74.00	-15.79	51.78	3	Horizontal	188	2.97	-	34.57	7.21	35.35
AV	5.416G	45.91	54.00	-8.09	39.47	3	Horizontal	188	2.97	-	34.57	7.22	35.35
PK	5.4656G	57.22	68.20	-10.98	50.77	3	Horizontal	188	2.97	-	34.53	7.27	35.35
PK	5.5784G	115.98	Inf	-Inf	109.39	3	Horizontal	188	2.97	-	34.60	7.38	35.39
AV	5.576G	104.59	Inf	-Inf	98.00	3	Horizontal	188	2.97	-	34.60	7.38	35.39
PK	5.7488G	57.55	68.20	-10.65	51.42	3	Horizontal	188	2.97	-	34.20	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

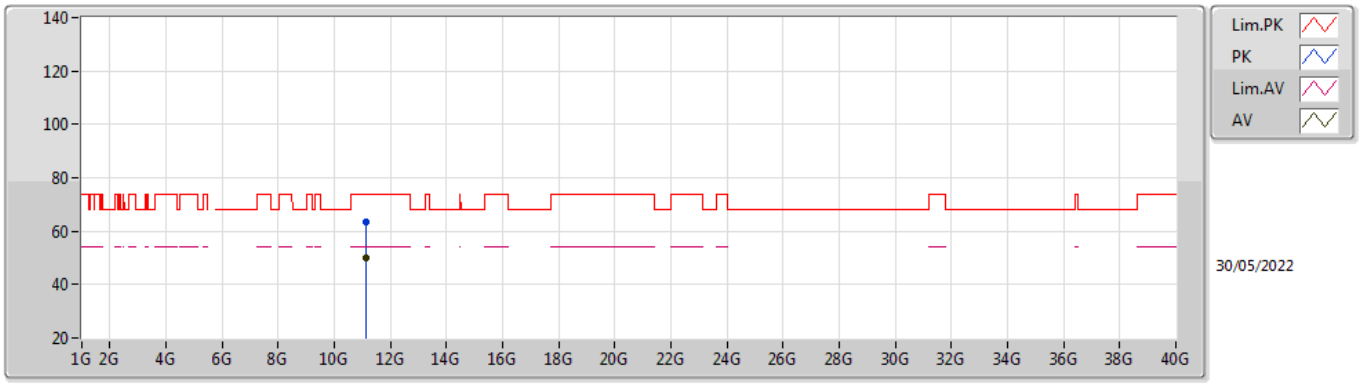


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1496G	63.32	74.00	-10.68	49.31	3	Vertical	178	2.96	-	38.55	10.67	35.21
AV	11.1542G	50.15	54.00	-3.85	36.14	3	Vertical	178	2.96	-	38.55	10.67	35.21

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

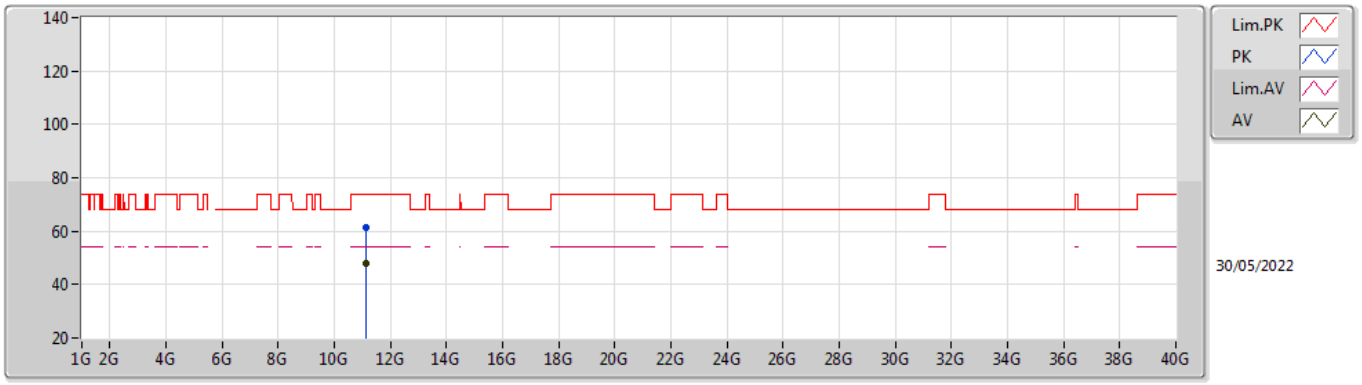


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.1526G	61.36	74.00	-12.64	47.35	3	Horizontal	148	1.80	-	38.55	10.67	35.21
AV	11.1504G	47.88	54.00	-6.12	33.87	3	Horizontal	148	1.80	-	38.55	10.67	35.21

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

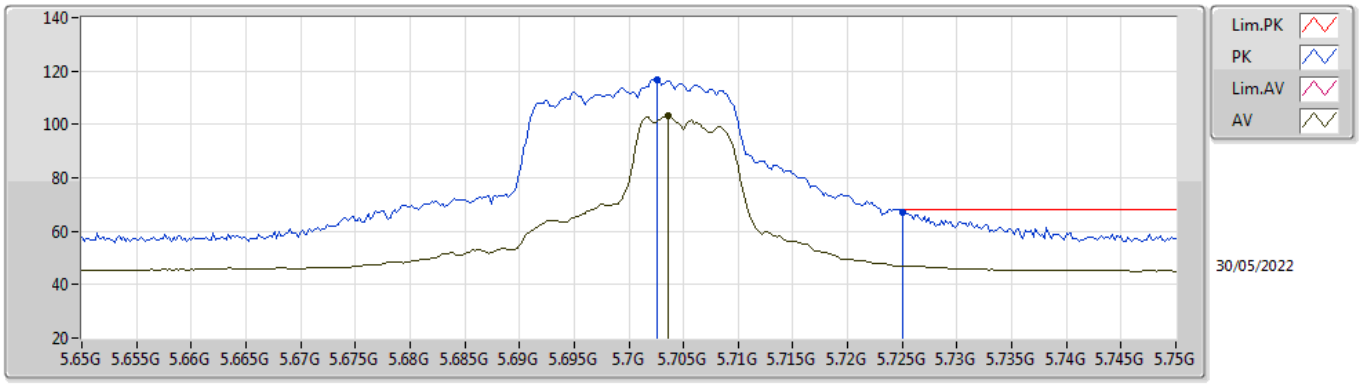


EUT X_2TX
Setting 16.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7026G	116.85	Inf	-Inf	110.61	3	Vertical	178	2.01	-	34.29	7.40	35.45
AV	5.7036G	103.44	Inf	-Inf	97.20	3	Vertical	178	2.01	-	34.29	7.40	35.45
PK	5.725G	67.09	68.20	-1.11	60.90	3	Vertical	178	2.01	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

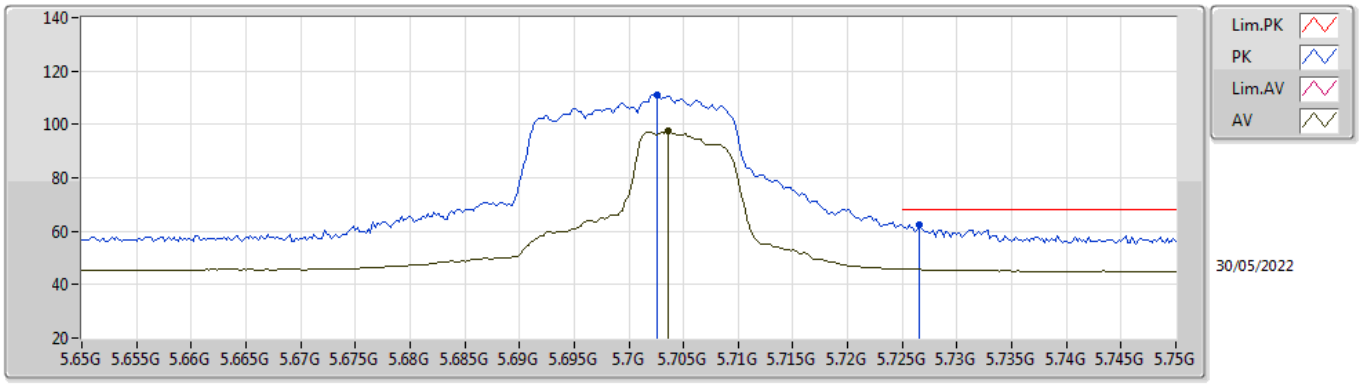


EUT X_2TX
Setting 16.75
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7026G	111.11	Inf	-Inf	104.87	3	Horizontal	214	1.79	-	34.29	7.40	35.45
AV	5.7036G	97.47	Inf	-Inf	91.23	3	Horizontal	214	1.79	-	34.29	7.40	35.45
PK	5.7266G	62.57	68.20	-5.63	56.38	3	Horizontal	214	1.79	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

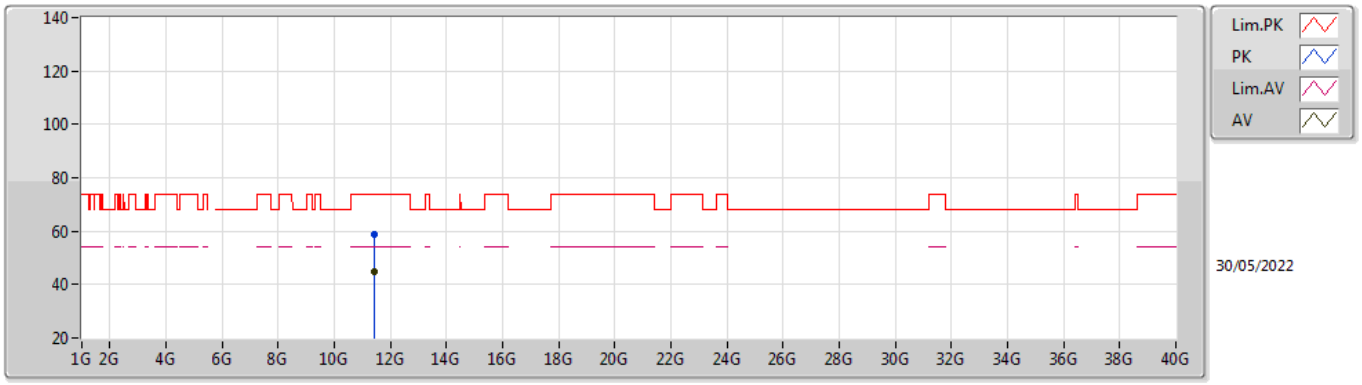


EUT X_2TX
Setting 16.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.408G	58.86	74.00	-15.14	44.83	3	Vertical	79	2.93	-	38.82	10.71	35.50
AV	11.4054G	44.90	54.00	-9.10	30.87	3	Vertical	79	2.93	-	38.81	10.71	35.49

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

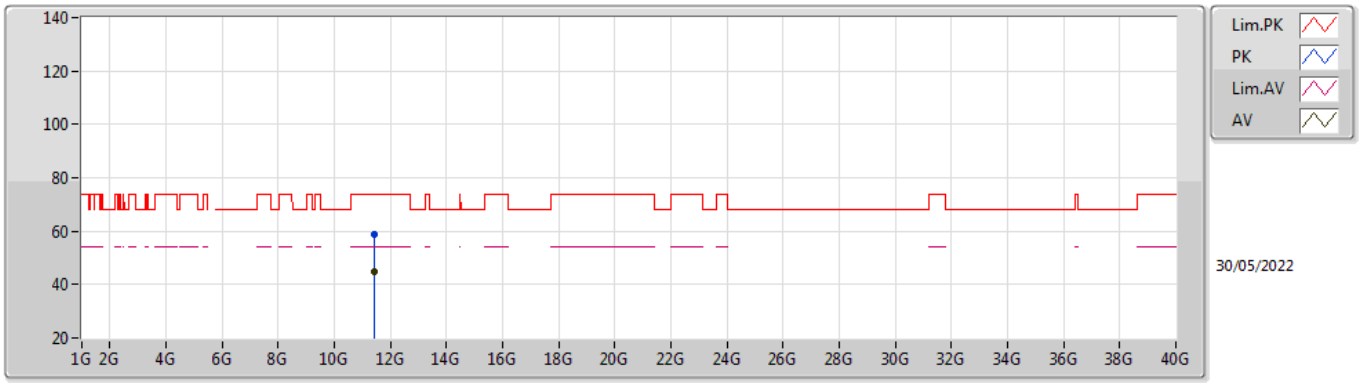


EUT X_2TX
Setting 16.75
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4128G	58.99	74.00	-15.01	44.95	3	Horizontal	294	2.26	-	38.83	10.71	35.50
AV	11.4054G	44.90	54.00	-9.10	30.87	3	Horizontal	294	2.26	-	38.81	10.71	35.49

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

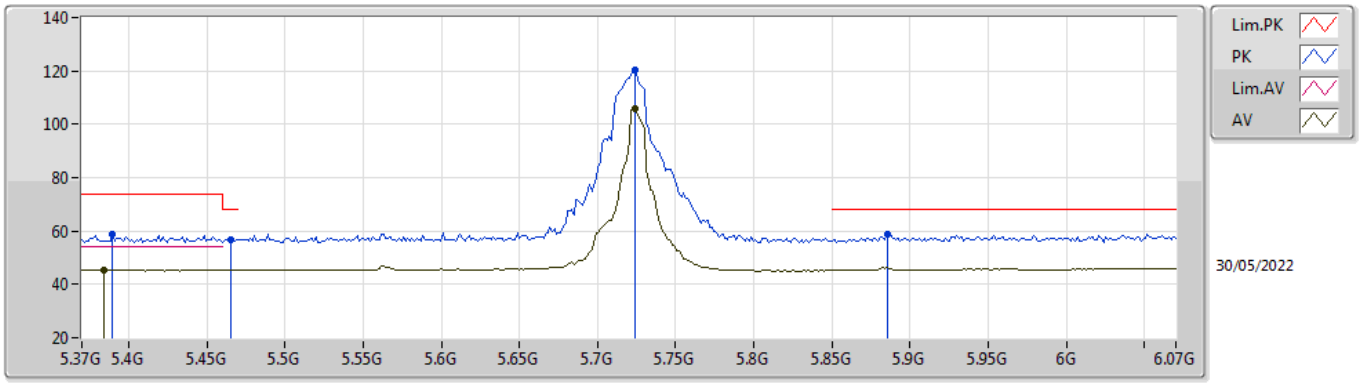


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3896G	58.76	74.00	-15.24	52.33	3	Vertical	178	1.80	-	34.58	7.20	35.35
AV	5.384G	45.32	54.00	-8.68	38.90	3	Vertical	178	1.80	-	34.57	7.20	35.35
PK	5.4652G	56.98	68.20	-11.22	50.53	3	Vertical	178	1.80	-	34.53	7.27	35.35
PK	5.7242G	120.21	Inf	-Inf	114.02	3	Vertical	178	1.80	-	34.25	7.40	35.46
AV	5.7242G	105.84	Inf	-Inf	99.65	3	Vertical	178	1.80	-	34.25	7.40	35.46
PK	5.8852G	58.86	68.20	-9.34	52.40	3	Vertical	178	1.80	-	34.51	7.49	35.54

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

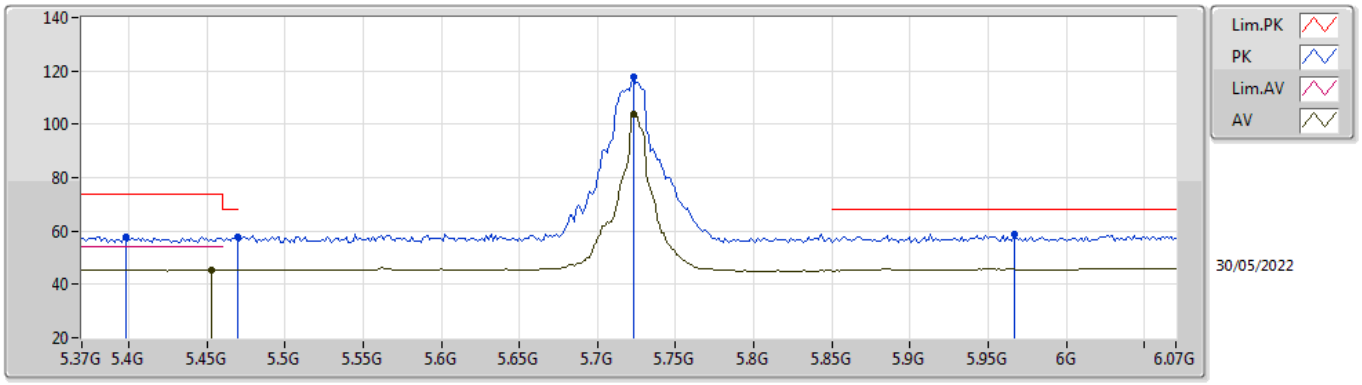


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.398G	58.00	74.00	-16.00	51.55	3	Horizontal	184	2.72	-	34.60	7.20	35.35
PK	5.4694G	57.64	68.20	-10.56	51.18	3	Horizontal	184	2.72	-	34.54	7.27	35.35
AV	5.4526G	45.33	54.00	-8.67	38.92	3	Horizontal	184	2.72	-	34.51	7.25	35.35
PK	5.7228G	117.70	Inf	-Inf	111.51	3	Horizontal	184	2.72	-	34.25	7.40	35.46
AV	5.7228G	103.56	Inf	-Inf	97.37	3	Horizontal	184	2.72	-	34.25	7.40	35.46
PK	5.9664G	58.93	68.20	-9.27	52.14	3	Horizontal	184	2.72	-	34.80	7.57	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

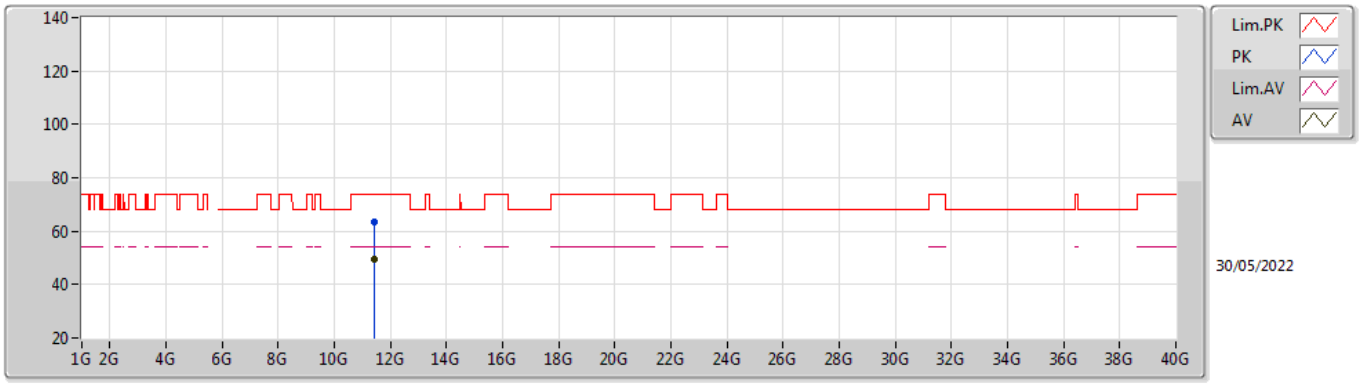


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.439G	63.43	74.00	-10.57	49.36	3	Vertical	178	2.54	-	38.88	10.72	35.53
AV	11.4496G	49.47	54.00	-4.53	35.39	3	Vertical	178	2.54	-	38.90	10.72	35.54

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

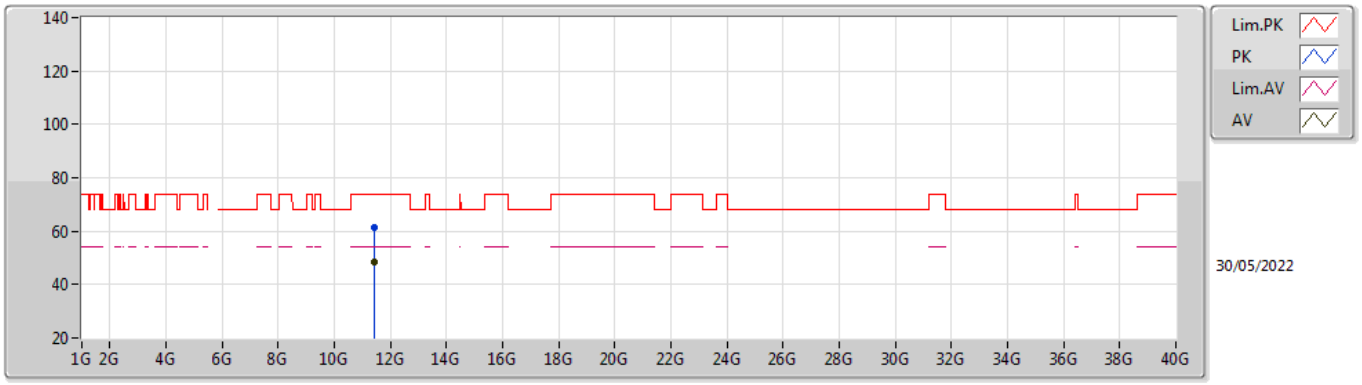


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.445G	61.39	74.00	-12.61	47.32	3	Horizontal	142	2.09	-	38.89	10.72	35.54
AV	11.4456G	48.64	54.00	-5.36	34.57	3	Horizontal	142	2.09	-	38.89	10.72	35.54

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

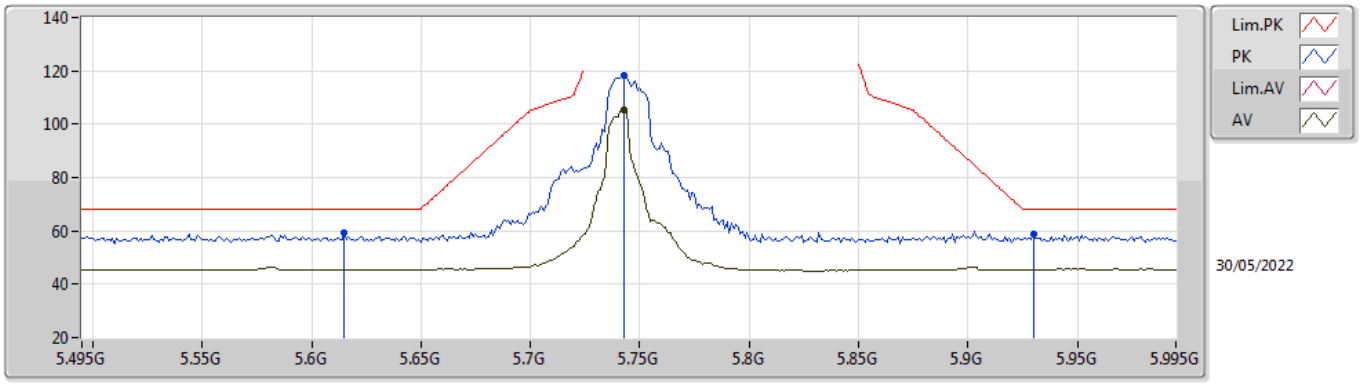


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.615G	59.30	68.20	-8.90	52.74	3	Vertical	174	1.80	-	34.57	7.40	35.41
PK	5.743G	118.52	Inf	-Inf	112.38	3	Vertical	174	1.80	-	34.21	7.40	35.47
AV	5.743G	105.37	Inf	-Inf	99.23	3	Vertical	174	1.80	-	34.21	7.40	35.47
PK	5.93G	58.78	68.20	-9.42	52.09	3	Vertical	174	1.80	-	34.72	7.53	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

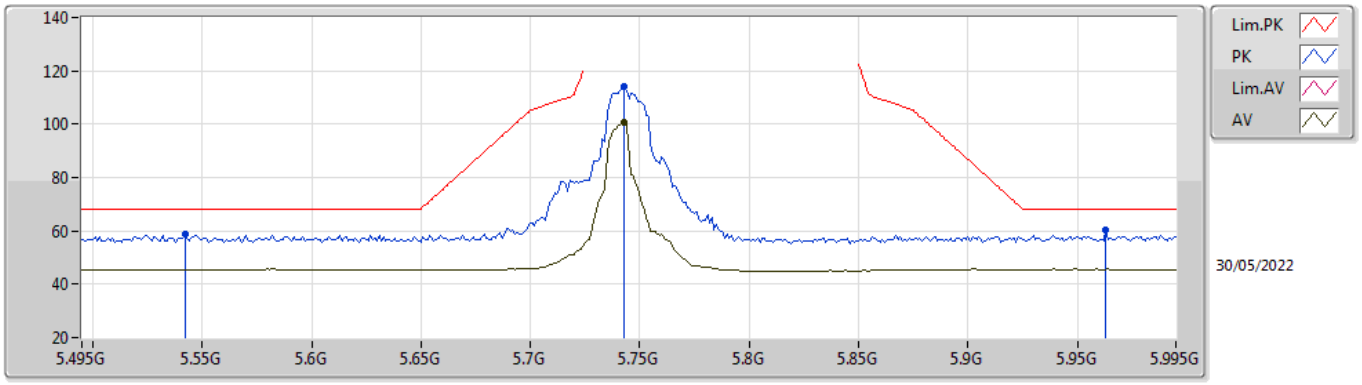


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.542G	58.55	68.20	-9.65	51.98	3	Horizontal	208	1.26	-	34.60	7.34	35.37
PK	5.743G	114.08	Inf	-Inf	107.94	3	Horizontal	208	1.26	-	34.21	7.40	35.47
AV	5.743G	100.53	Inf	-Inf	94.39	3	Horizontal	208	1.26	-	34.21	7.40	35.47
PK	5.963G	60.25	68.20	-7.95	53.47	3	Horizontal	208	1.26	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

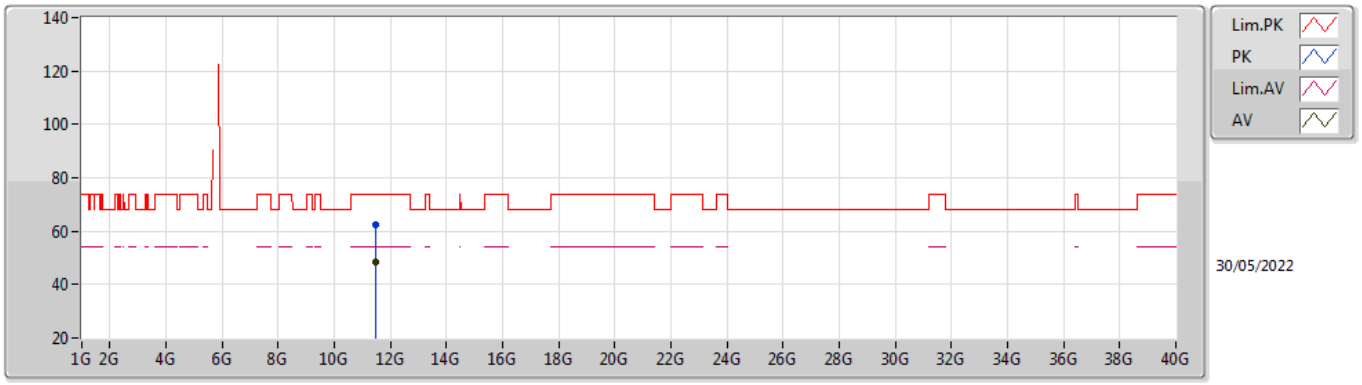


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4796G	62.33	74.00	-11.67	48.23	3	Vertical	174	2.55	-	38.96	10.72	35.58
AV	11.4844G	48.33	54.00	-5.67	34.22	3	Vertical	174	2.55	-	38.97	10.72	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

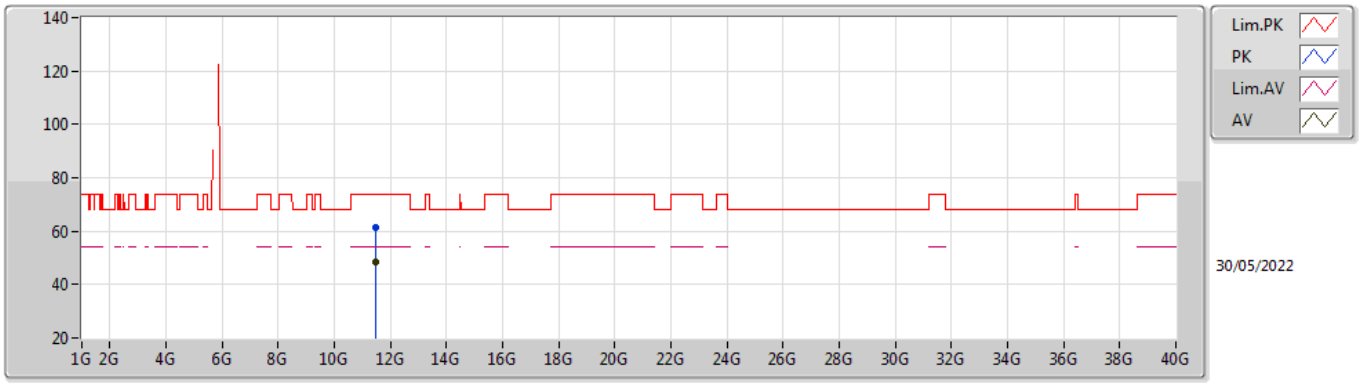


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4804G	61.16	74.00	-12.84	47.06	3	Horizontal	138	2.06	-	38.96	10.72	35.58
AV	11.4804G	48.21	54.00	-5.79	34.11	3	Horizontal	138	2.06	-	38.96	10.72	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

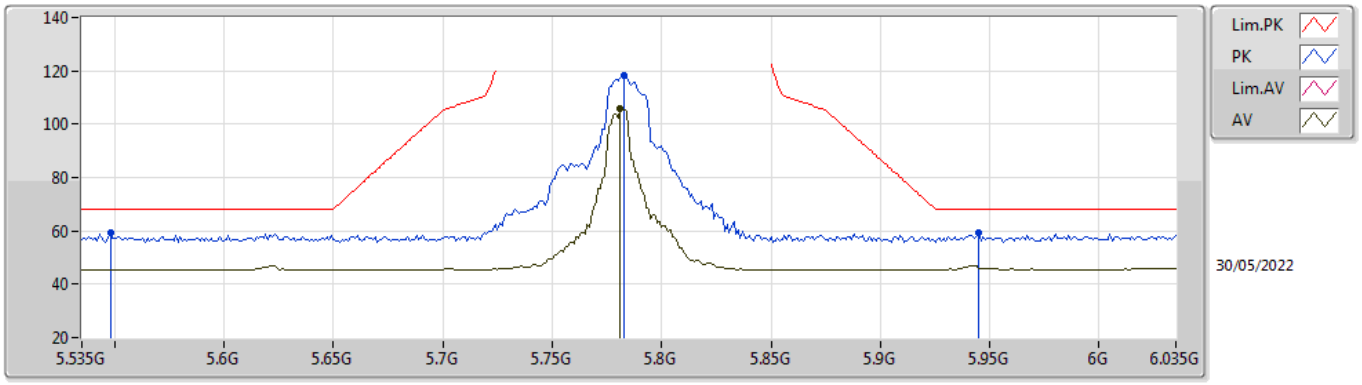


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.548G	59.06	68.20	-9.14	52.48	3	Vertical	174	1.80	-	34.60	7.35	35.37
PK	5.783G	118.26	Inf	-Inf	112.15	3	Vertical	174	1.80	-	34.20	7.40	35.49
AV	5.781G	105.91	Inf	-Inf	99.80	3	Vertical	174	1.80	-	34.20	7.40	35.49
PK	5.945G	59.36	68.20	-8.84	52.61	3	Vertical	174	1.80	-	34.78	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

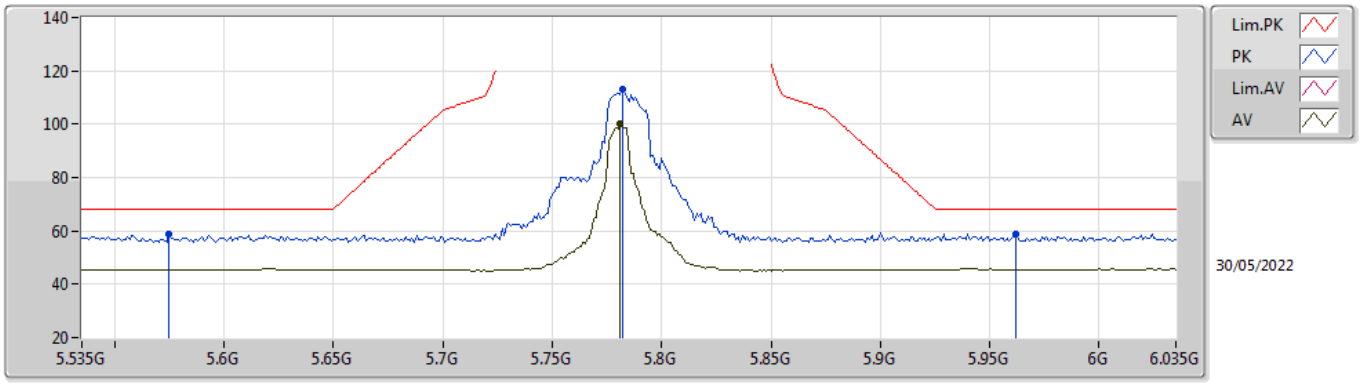


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.575G	58.94	68.20	-9.26	52.36	3	Horizontal	209	1.24	-	34.60	7.37	35.39
PK	5.782G	112.90	Inf	-Inf	106.79	3	Horizontal	209	1.24	-	34.20	7.40	35.49
AV	5.781G	99.93	Inf	-Inf	93.82	3	Horizontal	209	1.24	-	34.20	7.40	35.49
PK	5.962G	59.01	68.20	-9.19	52.23	3	Horizontal	209	1.24	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

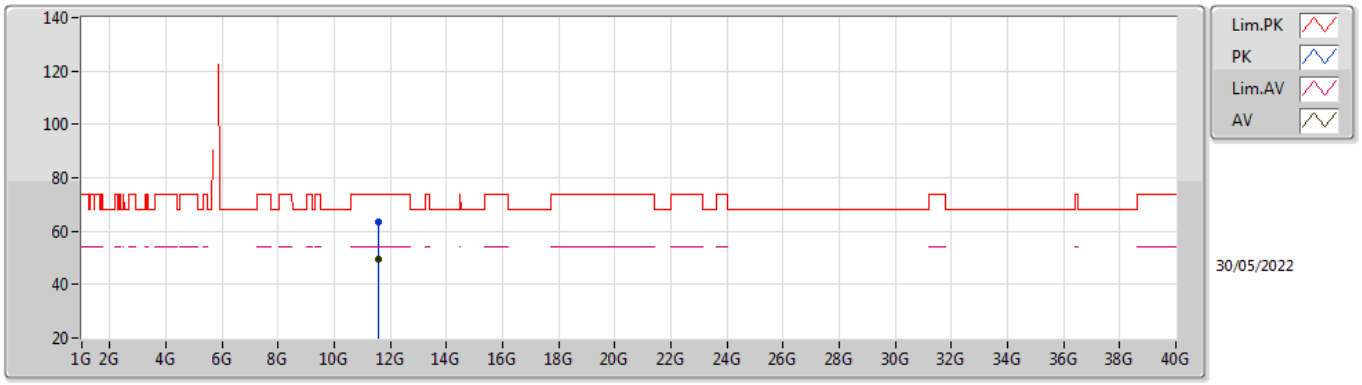


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5696G	63.58	74.00	-10.42	49.14	3	Vertical	175	2.71	-	39.28	10.74	35.58
AV	11.5646G	49.28	54.00	-4.72	34.88	3	Vertical	175	2.71	-	39.26	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

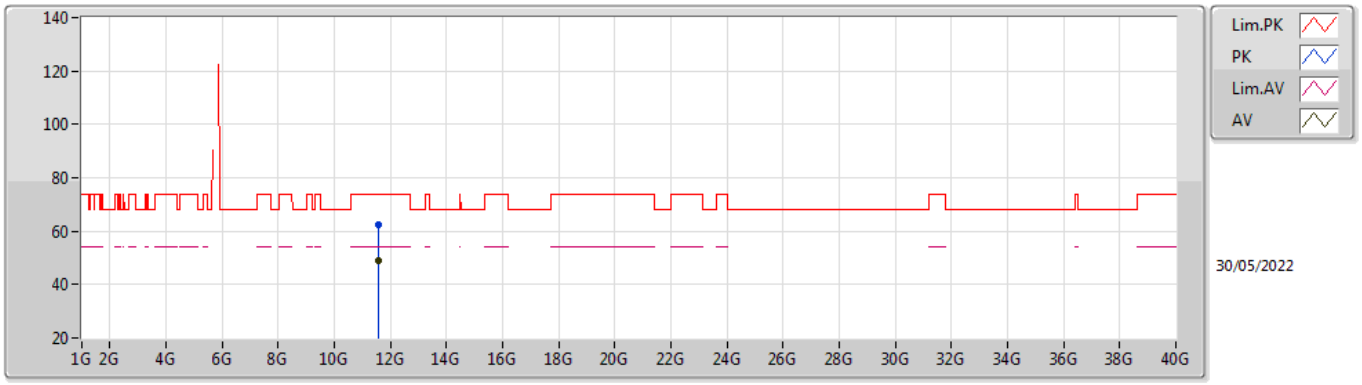


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.5626G	62.16	74.00	-11.84	47.77	3	Horizontal	144	2.05	-	39.25	10.73	35.59
AV	11.5606G	48.82	54.00	-5.18	34.44	3	Horizontal	144	2.05	-	39.24	10.73	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

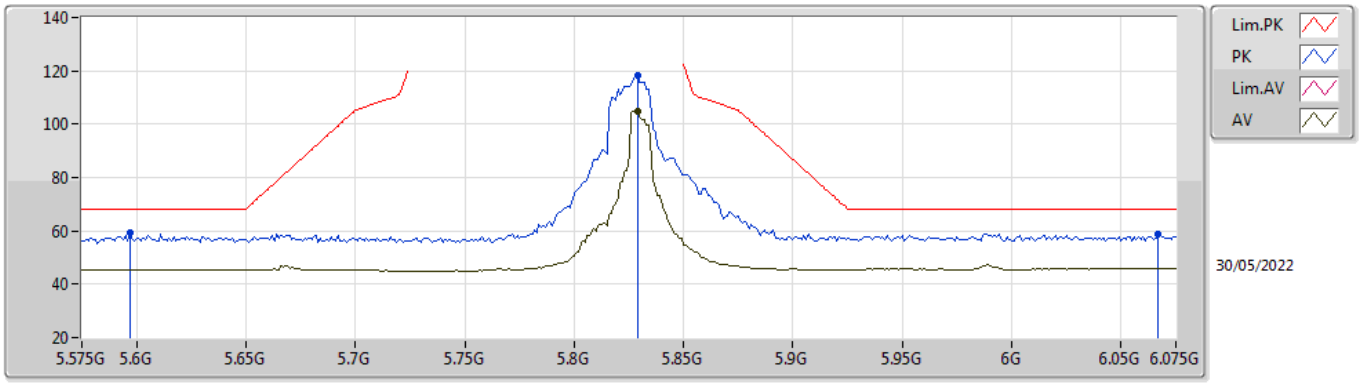


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.597G	59.11	68.20	-9.09	52.51	3	Vertical	174	1.95	-	34.60	7.40	35.40
PK	5.829G	118.24	Inf	-Inf	112.06	3	Vertical	174	1.95	-	34.26	7.43	35.51
AV	5.829G	105.08	Inf	-Inf	98.90	3	Vertical	174	1.95	-	34.26	7.43	35.51
PK	6.067G	58.73	68.20	-9.47	51.74	3	Vertical	174	1.95	-	34.93	7.63	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

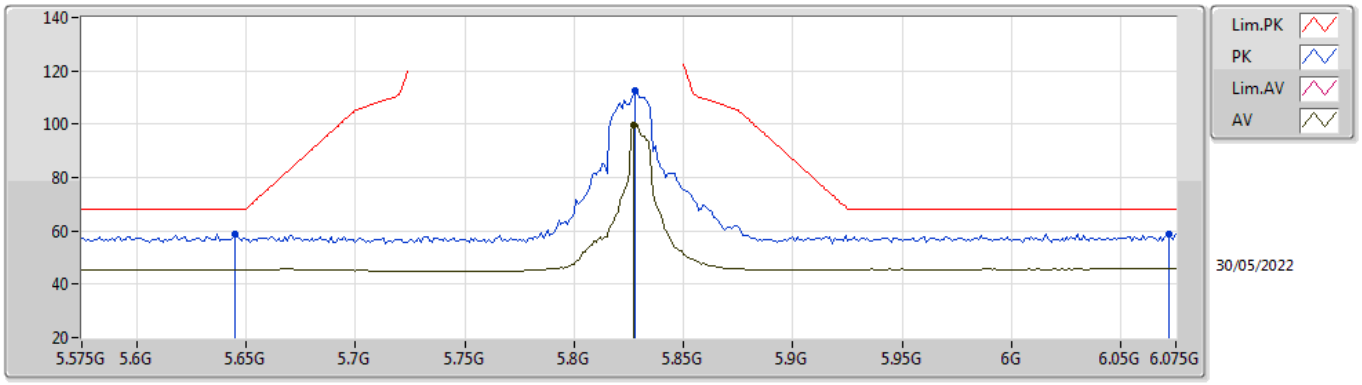


EUT X_2TX
Setting 21.5
03-B-E-2-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.645G	58.69	68.20	-9.51	52.20	3	Horizontal	209	1.14	-	34.51	7.40	35.42
PK	5.828G	112.81	Inf	-Inf	106.63	3	Horizontal	209	1.14	-	34.26	7.43	35.51
AV	5.827G	99.67	Inf	-Inf	93.50	3	Horizontal	209	1.14	-	34.25	7.43	35.51
PK	6.072G	58.93	68.20	-9.27	51.92	3	Horizontal	209	1.14	-	34.94	7.64	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

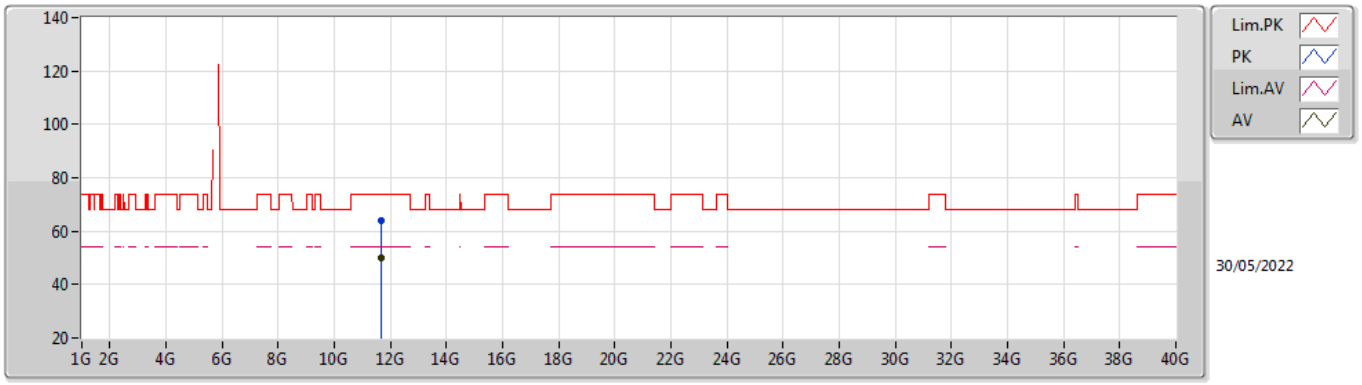


EUT X_2TX
Setting 21.5
03-B-E-2

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.6552G	63.97	74.00	-10.03	49.39	3	Vertical	172	2.73	-	39.40	10.75	35.57
AV	11.6596G	50.07	54.00	-3.93	35.48	3	Vertical	172	2.73	-	39.40	10.75	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

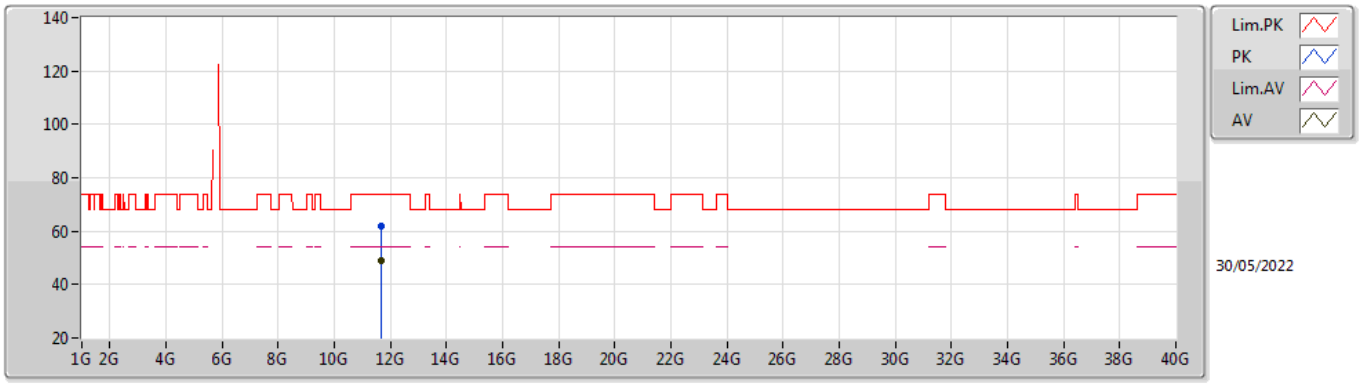

EUT X_2TX
Setting 21.5
03-B-E-2


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.655G	61.67	74.00	-12.33	47.09	3	Horizontal	204	2.04	-	39.40	10.75	35.57
AV	11.6554G	48.90	54.00	-5.10	34.32	3	Horizontal	204	2.04	-	39.40	10.75	35.57

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.725-5.85GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	AV	11.47264G	53.99	54.00	-0.01	3	Horizontal	143	1.76	-

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

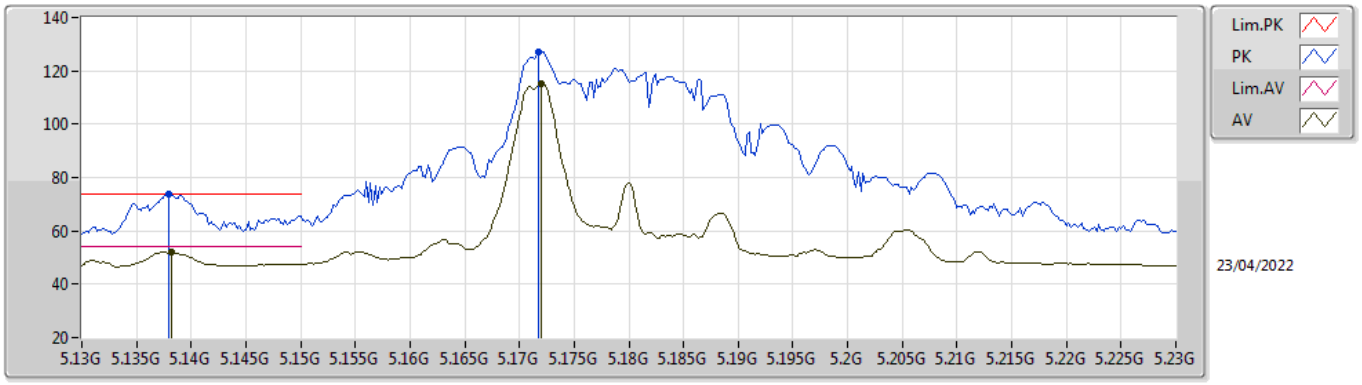


EUT Y_2TX
Setting 19.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.138G	73.77	74.00	-0.23	67.96	3	Vertical	74	1.93	-	33.98	7.17	35.34
AV	5.1382G	52.25	54.00	-1.75	46.44	3	Vertical	74	1.93	-	33.98	7.17	35.34
PK	5.1718G	126.84	Inf	-Inf	120.90	3	Vertical	74	1.93	-	34.09	7.19	35.34
AV	5.172G	115.20	Inf	-Inf	109.26	3	Vertical	74	1.93	-	34.09	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

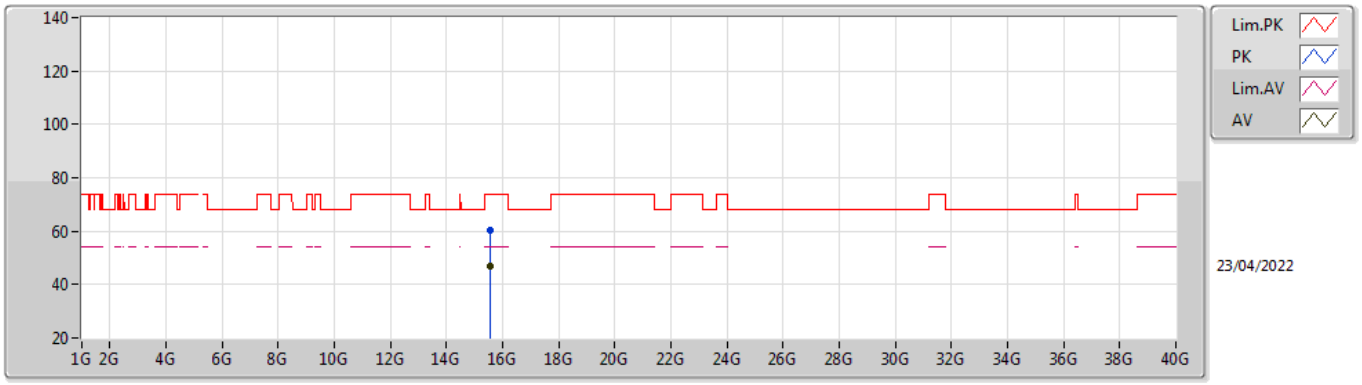


EUT Y_2TX
Setting 19.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.53528G	60.13	74.00	-13.87	43.91	3	Vertical	195	2.61	-	38.45	13.17	35.40
AV	15.53546G	46.65	54.00	-7.35	30.43	3	Vertical	195	2.61	-	38.45	13.17	35.40

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

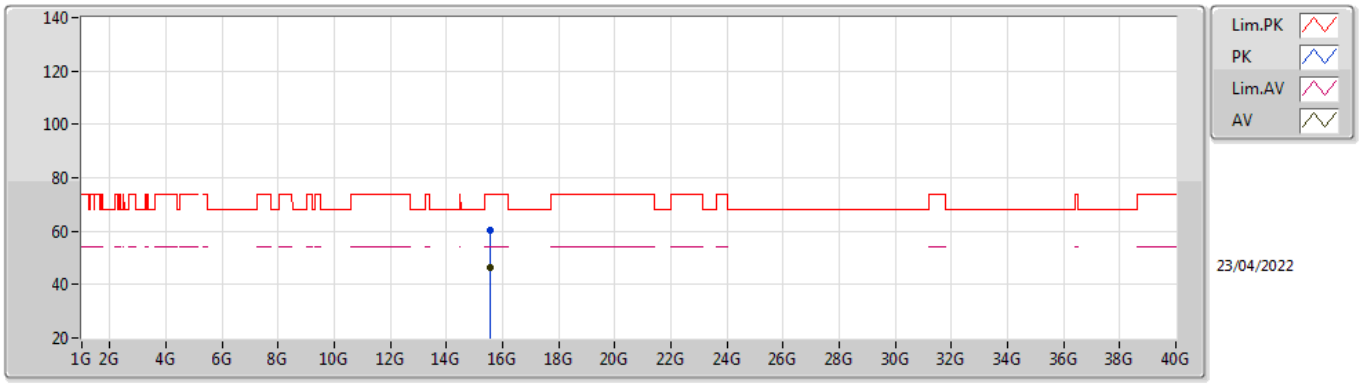


EUT Y_2TX
Setting 19.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.54026G	60.51	74.00	-13.49	44.32	3	Horizontal	84	1.38	-	38.42	13.17	35.40
AV	15.535G	46.62	54.00	-7.38	30.39	3	Horizontal	84	1.38	-	38.46	13.17	35.40

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

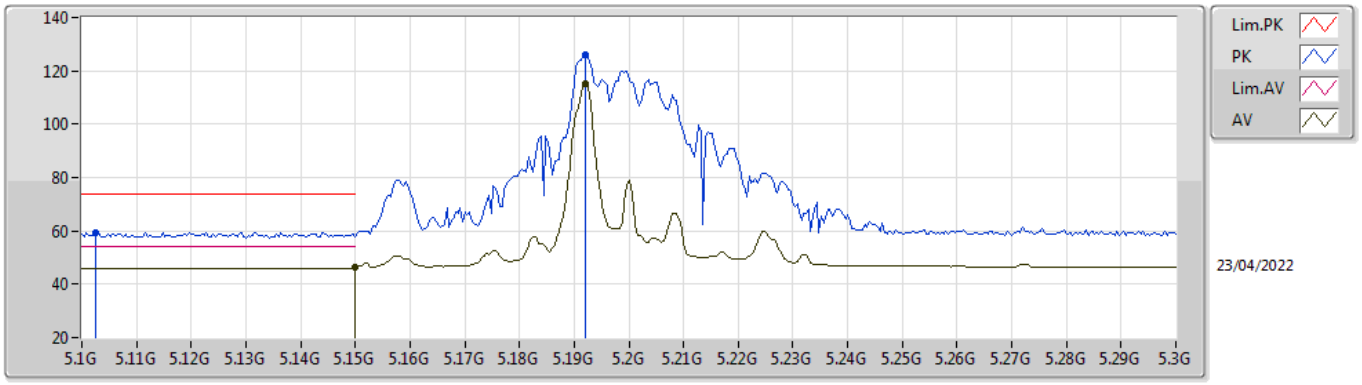


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1024G	59.51	74.00	-14.49	53.79	3	Vertical	57	1.92	-	33.90	7.15	35.33
AV	5.15G	46.25	54.00	-7.75	40.42	3	Vertical	57	1.92	-	34.00	7.17	35.34
PK	5.192G	126.21	Inf	-Inf	120.18	3	Vertical	57	1.92	-	34.17	7.20	35.34
AV	5.192G	115.13	Inf	-Inf	109.10	3	Vertical	57	1.92	-	34.17	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

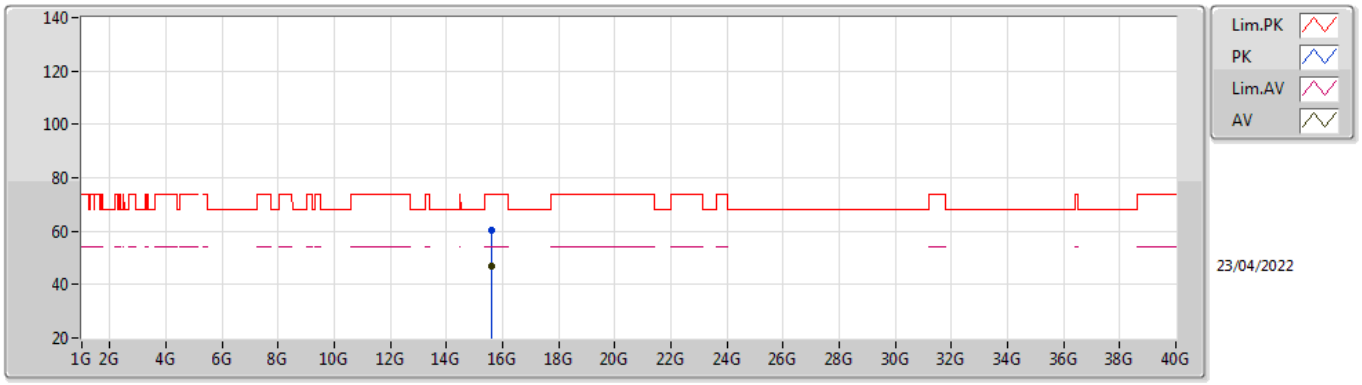


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.60228G	60.48	74.00	-13.52	44.75	3	Vertical	81	2.71	-	37.99	13.20	35.46
AV	15.5983G	46.76	54.00	-7.24	31.00	3	Vertical	81	2.71	-	38.01	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

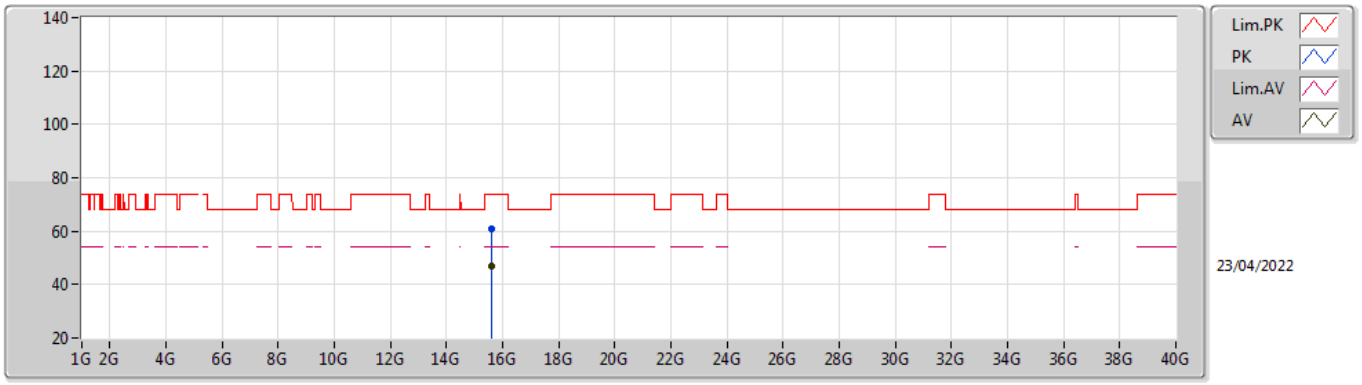


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5953G	60.69	74.00	-13.31	44.91	3	Horizontal	289	2.49	-	38.03	13.20	35.45
AV	15.595G	46.75	54.00	-7.25	30.96	3	Horizontal	289	2.49	-	38.04	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

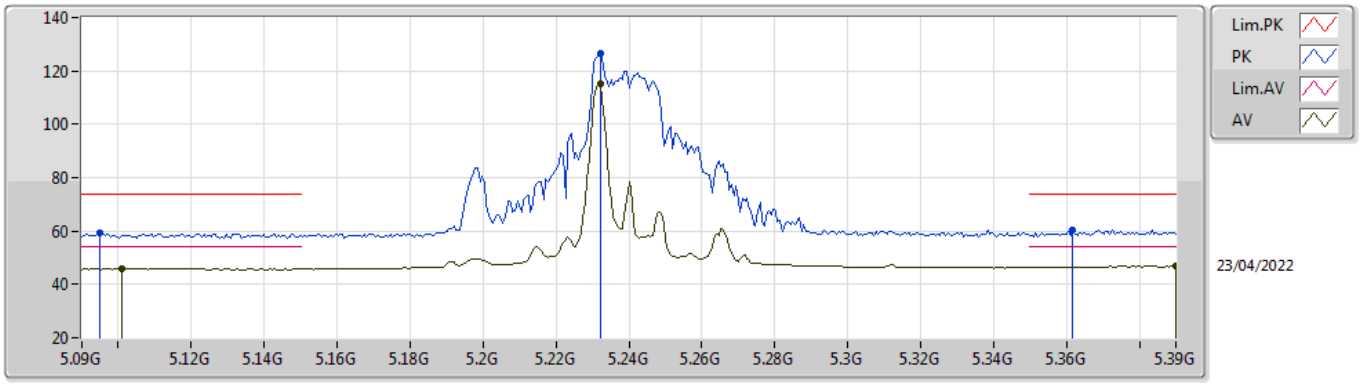


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.0948G	59.21	74.00	-14.79	53.50	3	Vertical	57	1.95	-	33.89	7.15	35.33
AV	5.1008G	45.73	54.00	-8.27	40.01	3	Vertical	57	1.95	-	33.90	7.15	35.33
PK	5.2322G	126.40	Inf	-Inf	120.21	3	Vertical	57	1.95	-	34.33	7.20	35.34
AV	5.2322G	115.25	Inf	-Inf	109.06	3	Vertical	57	1.95	-	34.33	7.20	35.34
PK	5.3618G	60.27	74.00	-13.73	53.89	3	Vertical	57	1.95	-	34.52	7.20	35.34
AV	5.39G	46.96	54.00	-7.04	40.53	3	Vertical	57	1.95	-	34.58	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

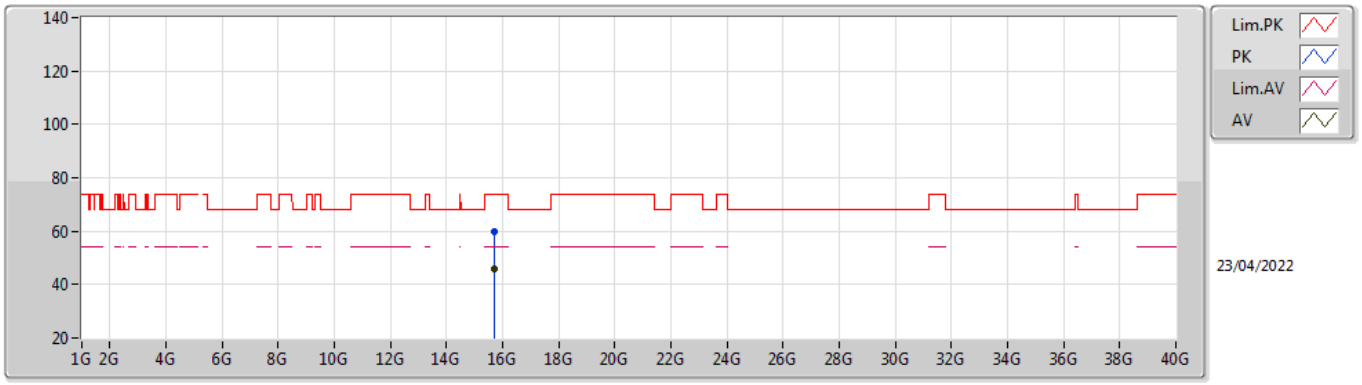


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.71644G	59.93	74.00	-14.07	44.65	3	Vertical	208	1.47	-	37.57	13.26	35.55
AV	15.724G	45.77	54.00	-8.23	30.47	3	Vertical	208	1.47	-	37.60	13.26	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

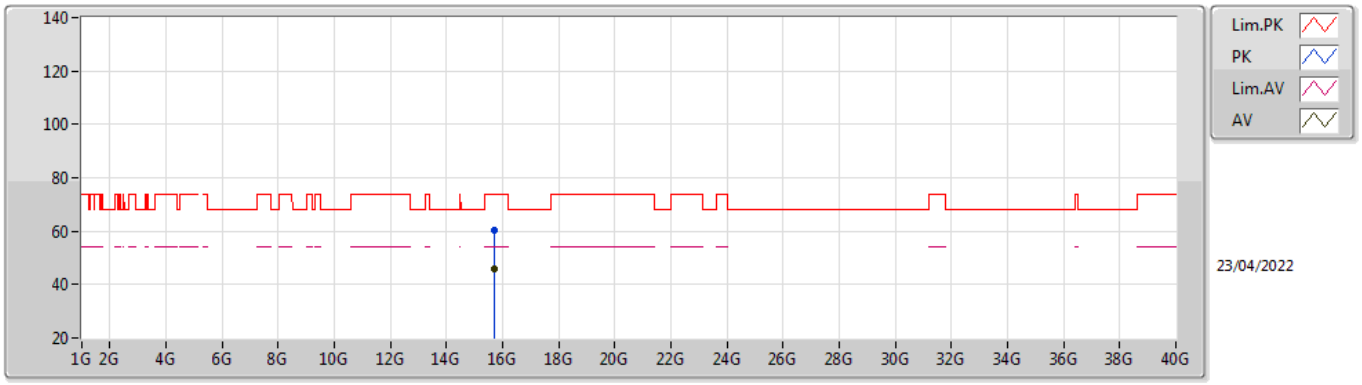


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7207G	60.13	74.00	-13.87	44.85	3	Horizontal	81	2.91	-	37.58	13.26	35.56
AV	15.72072G	45.79	54.00	-8.21	30.51	3	Horizontal	81	2.91	-	37.58	13.26	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

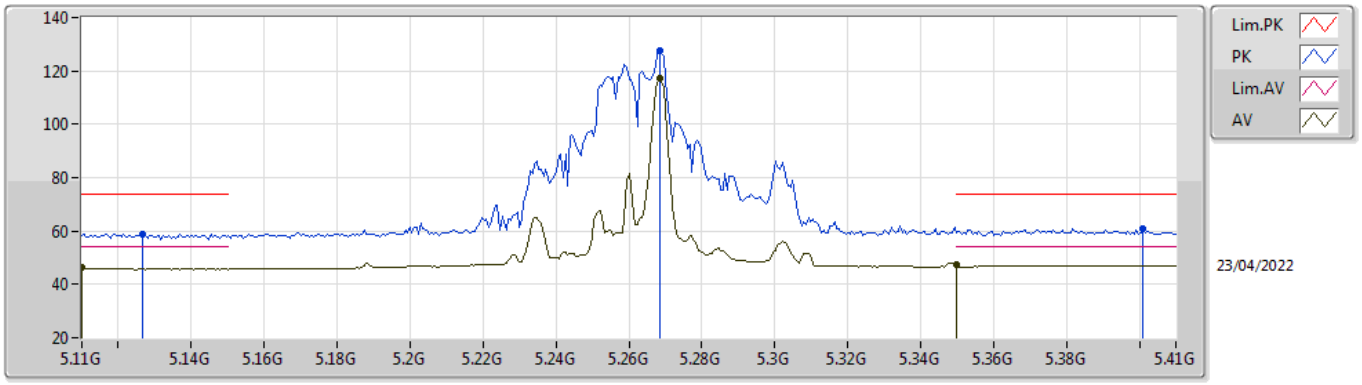


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1268G	58.95	74.00	-15.05	53.18	3	Vertical	77	1.94	-	33.95	7.16	35.34
AV	5.11G	46.21	54.00	-7.79	40.46	3	Vertical	77	1.94	-	33.92	7.16	35.33
PK	5.2684G	127.36	Inf	-Inf	121.06	3	Vertical	77	1.94	-	34.44	7.20	35.34
AV	5.2684G	117.07	Inf	-Inf	110.77	3	Vertical	77	1.94	-	34.44	7.20	35.34
PK	5.401G	60.80	74.00	-13.20	54.35	3	Vertical	77	1.94	-	34.60	7.20	35.35
AV	5.35G	47.24	54.00	-6.76	40.88	3	Vertical	77	1.94	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

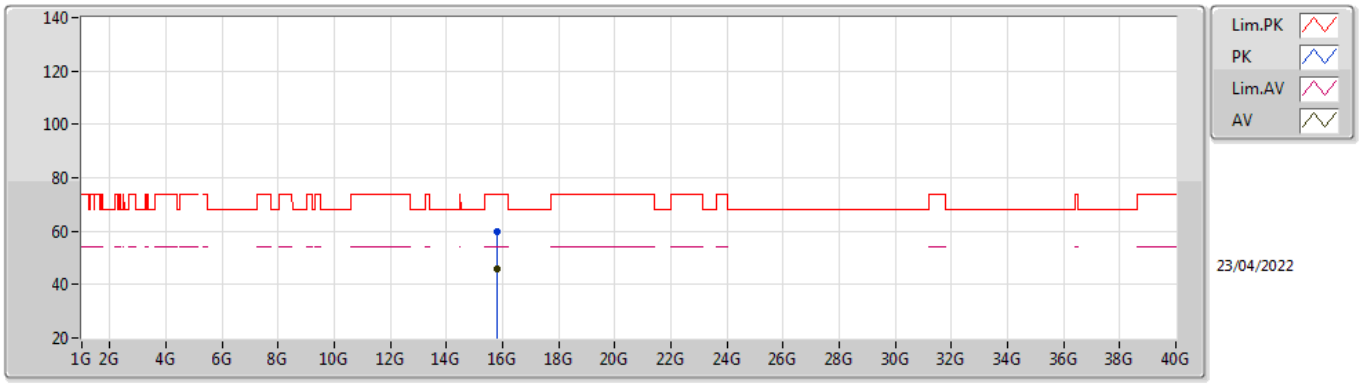


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7894G	59.78	74.00	-14.22	44.24	3	Vertical	304	1.80	-	37.86	13.29	35.61
AV	15.78836G	45.69	54.00	-8.31	30.16	3	Vertical	304	1.80	-	37.85	13.29	35.61

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

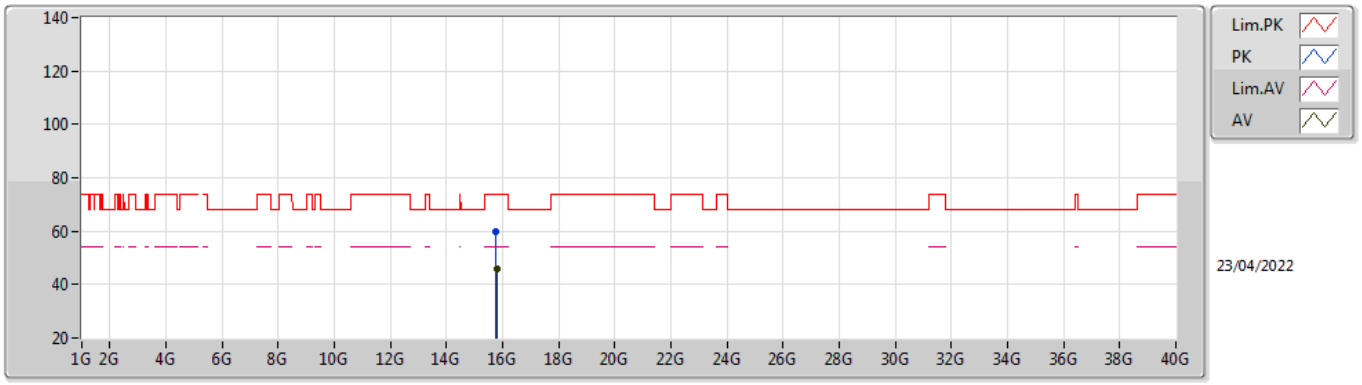


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7756G	59.70	74.00	-14.30	44.21	3	Horizontal	359	1.80	-	37.80	13.29	35.60
AV	15.78528G	45.77	54.00	-8.23	30.25	3	Horizontal	359	1.80	-	37.84	13.29	35.61

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

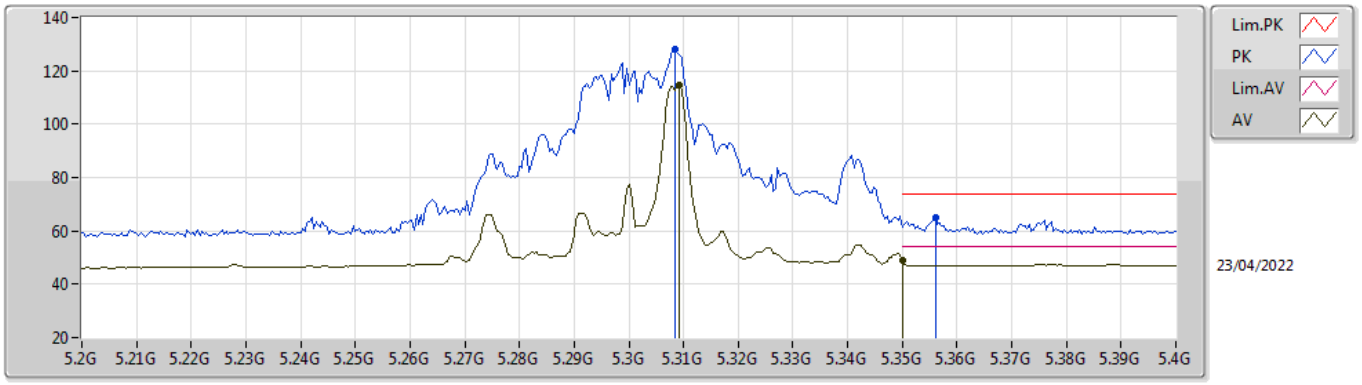


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3084G	128.03	Inf	-Inf	121.67	3	Vertical	76	1.87	-	34.50	7.20	35.34
AV	5.3092G	114.61	Inf	-Inf	108.25	3	Vertical	76	1.87	-	34.50	7.20	35.34
PK	5.356G	64.99	74.00	-9.01	58.62	3	Vertical	76	1.87	-	34.51	7.20	35.34
AV	5.35G	49.03	54.00	-4.97	42.67	3	Vertical	76	1.87	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

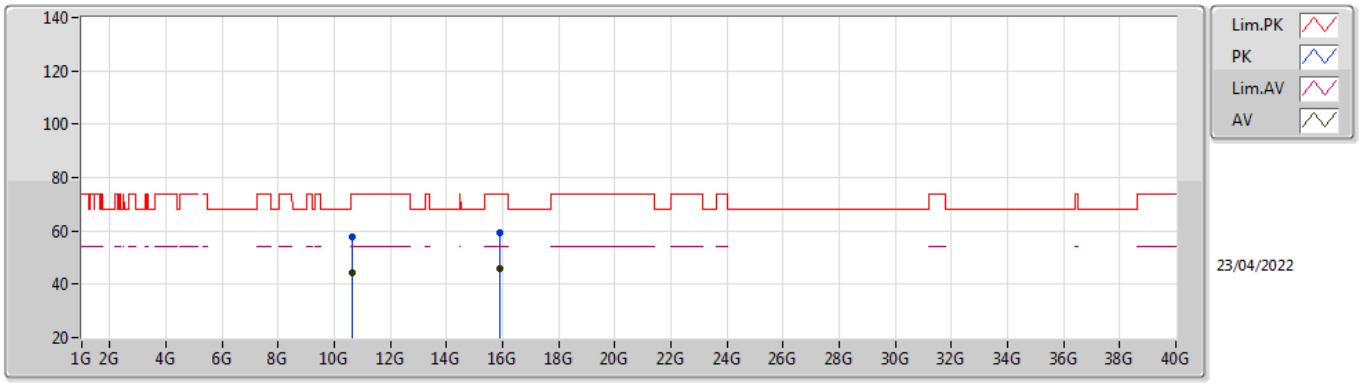


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.61568G	57.99	74.00	-16.01	44.54	3	Vertical	212	1.90	-	38.23	10.59	35.37
AV	10.6161G	44.34	54.00	-9.66	30.89	3	Vertical	212	1.90	-	38.23	10.59	35.37
PK	15.90054G	59.27	74.00	-14.73	44.03	3	Vertical	55	2.26	-	37.60	13.35	35.71
AV	15.90478G	45.63	54.00	-8.37	30.40	3	Vertical	55	2.26	-	37.59	13.35	35.71

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

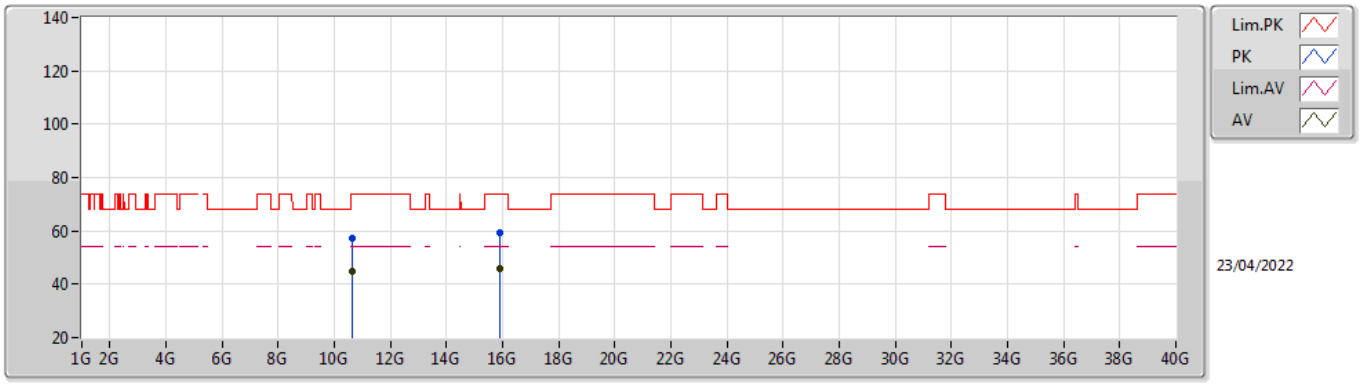


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.61736G	57.32	74.00	-16.68	43.87	3	Horizontal	118	1.80	-	38.23	10.59	35.37
AV	10.61666G	44.77	54.00	-9.23	31.32	3	Horizontal	118	1.80	-	38.23	10.59	35.37
PK	15.90136G	59.40	74.00	-14.60	44.16	3	Horizontal	28	1.99	-	37.60	13.35	35.71
AV	15.90458G	45.61	54.00	-8.39	30.38	3	Horizontal	28	1.99	-	37.59	13.35	35.71

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

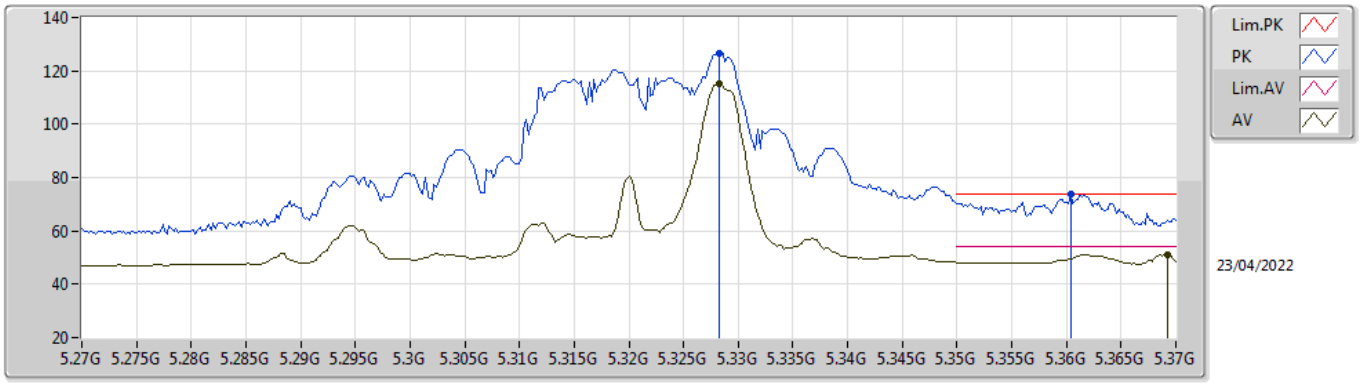


EUT Y_2TX
Setting 18
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3282G	126.44	Inf	-Inf	120.08	3	Vertical	74	1.93	-	34.50	7.20	35.34
AV	5.3282G	115.16	Inf	-Inf	108.80	3	Vertical	74	1.93	-	34.50	7.20	35.34
PK	5.3604G	73.76	74.00	-0.24	67.38	3	Vertical	74	1.93	-	34.52	7.20	35.34
AV	5.3692G	51.17	54.00	-2.83	44.77	3	Vertical	74	1.93	-	34.54	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

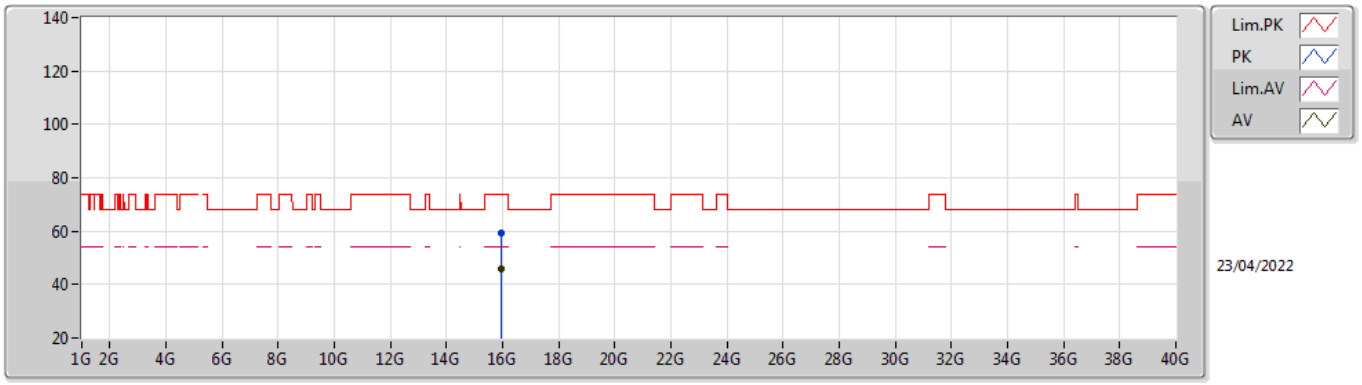


EUT Y_2TX
Setting 18
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.96078G	59.52	74.00	-14.48	44.42	3	Vertical	280	1.62	-	37.48	13.38	35.76
AV	15.96336G	45.73	54.00	-8.27	30.64	3	Vertical	280	1.62	-	37.47	13.38	35.76

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

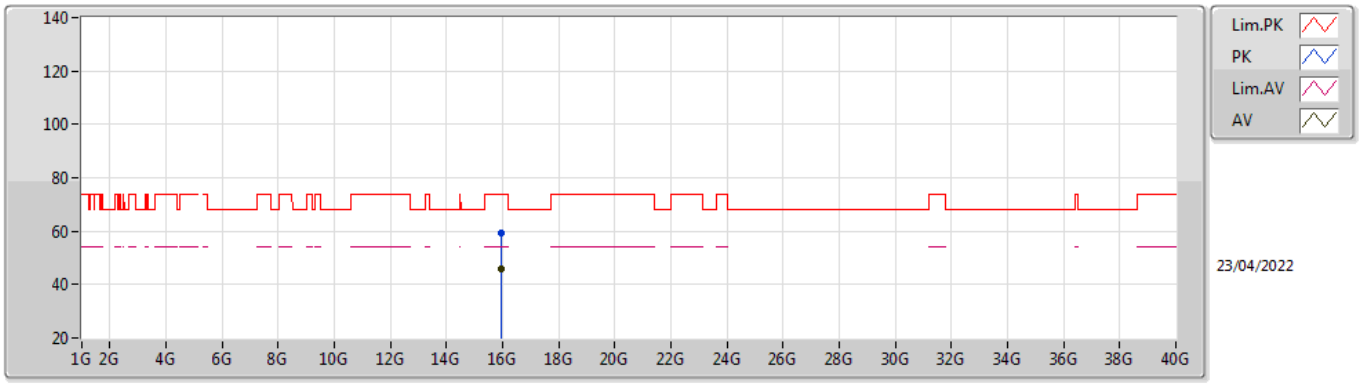


EUT Y_2TX
Setting 18
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.95876G	59.56	74.00	-14.44	44.46	3	Horizontal	261	1.44	-	37.48	13.38	35.76
AV	15.95812G	45.71	54.00	-8.29	30.60	3	Horizontal	261	1.44	-	37.48	13.38	35.75

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

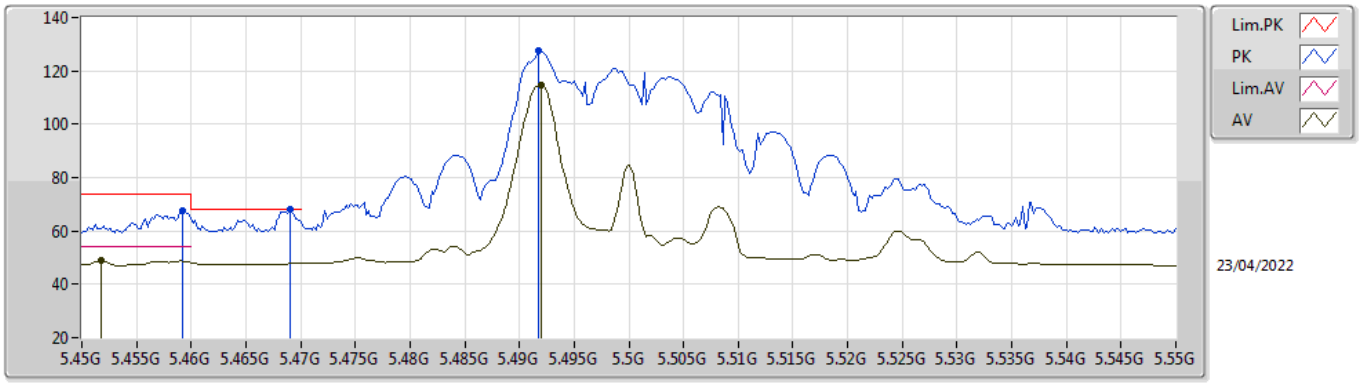


EUT Y_2TX
Setting 17.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4592G	67.53	74.00	-6.47	61.10	3	Vertical	75	1.90	-	34.52	7.26	35.35
AV	5.4518G	48.75	54.00	-5.25	42.35	3	Vertical	75	1.90	-	34.50	7.25	35.35
PK	5.469G	67.96	68.20	-0.24	61.50	3	Vertical	75	1.90	-	34.54	7.27	35.35
PK	5.4918G	127.47	Inf	-Inf	120.95	3	Vertical	75	1.90	-	34.58	7.29	35.35
AV	5.492G	114.75	Inf	-Inf	108.23	3	Vertical	75	1.90	-	34.58	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

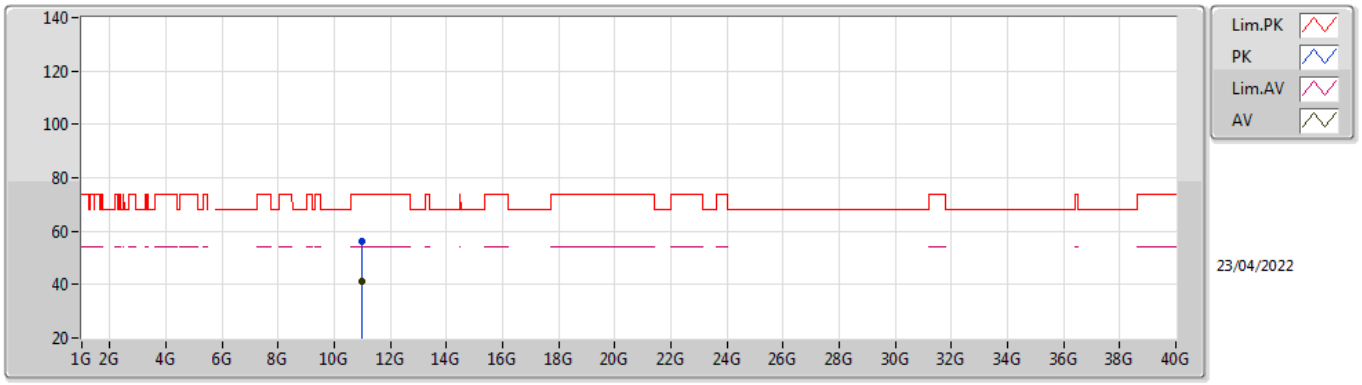


EUT Y_2TX
Setting 17.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.99546G	56.12	74.00	-17.88	42.11	3	Vertical	276	2.62	-	38.40	10.65	35.04
AV	11.00382G	41.28	54.00	-12.72	27.27	3	Vertical	276	2.62	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

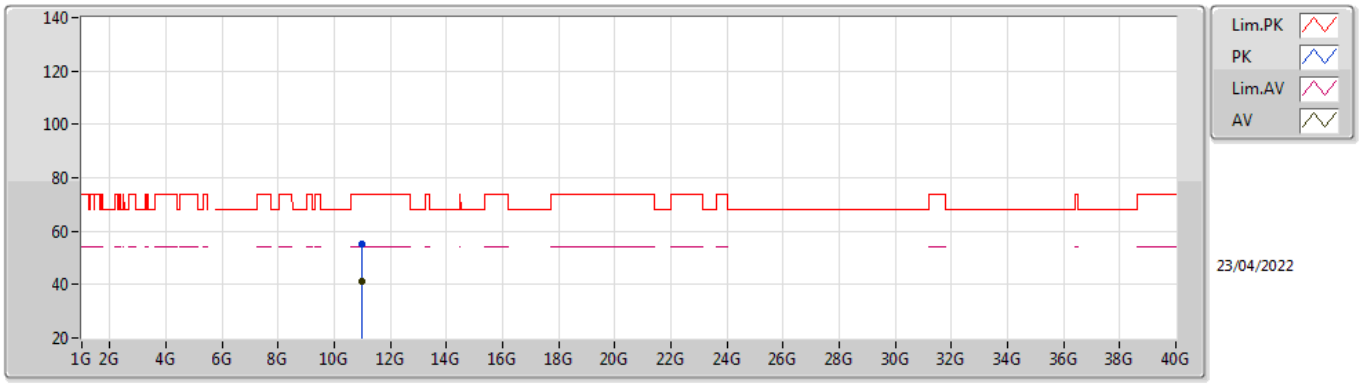


EUT Y_2TX
Setting 17.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.0035G	55.27	74.00	-18.73	41.26	3	Horizontal	309	2.07	-	38.40	10.65	35.04
AV	11.0034G	41.26	54.00	-12.74	27.25	3	Horizontal	309	2.07	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

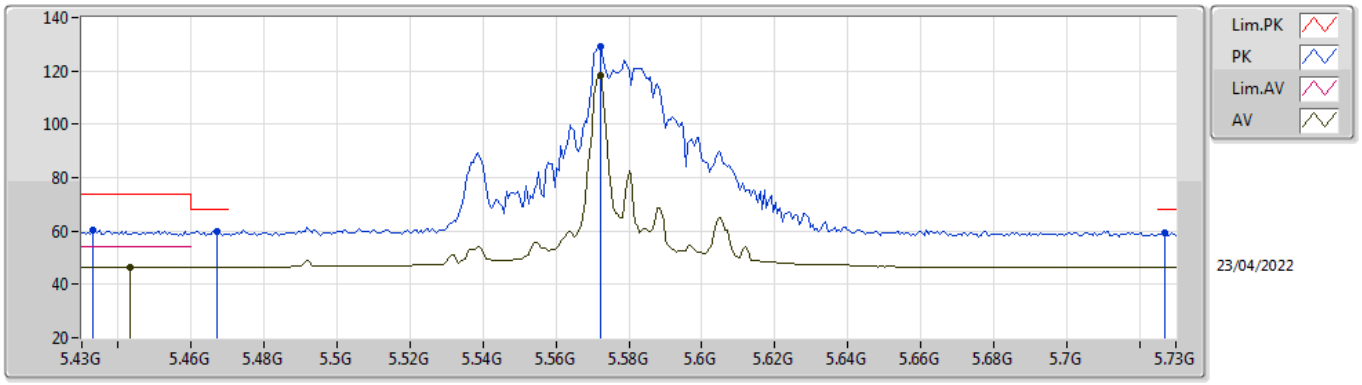


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.433G	60.35	74.00	-13.65	53.94	3	Vertical	75	1.83	-	34.53	7.23	35.35
AV	5.4432G	46.63	54.00	-7.37	40.23	3	Vertical	75	1.83	-	34.51	7.24	35.35
PK	5.4672G	59.84	68.20	-8.36	53.39	3	Vertical	75	1.83	-	34.53	7.27	35.35
PK	5.5722G	129.07	Inf	-Inf	122.49	3	Vertical	75	1.83	-	34.60	7.37	35.39
AV	5.5722G	118.52	Inf	-Inf	111.94	3	Vertical	75	1.83	-	34.60	7.37	35.39
PK	5.727G	59.48	68.20	-8.72	53.29	3	Vertical	75	1.83	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

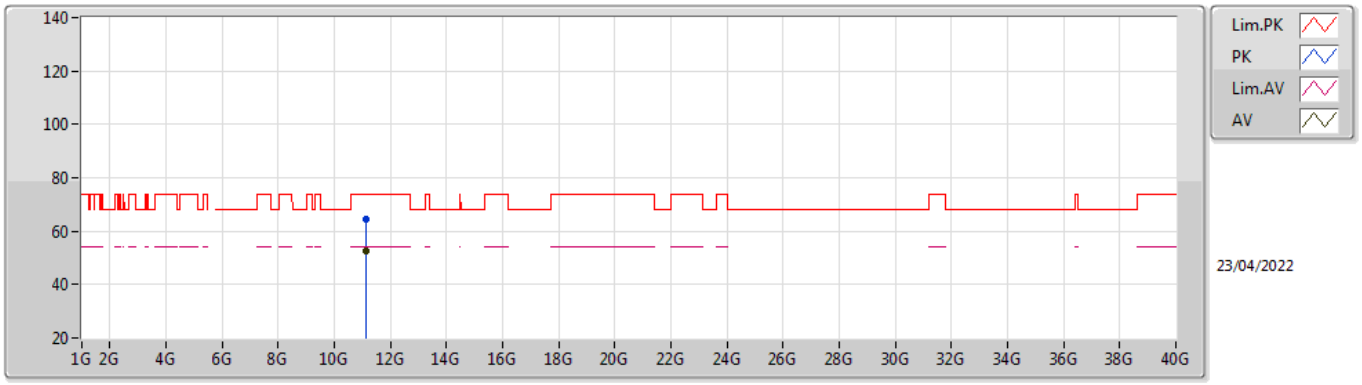


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.14344G	64.50	74.00	-9.50	50.49	3	Vertical	183	1.80	-	38.54	10.67	35.20
AV	11.14312G	52.47	54.00	-1.53	38.46	3	Vertical	183	1.80	-	38.54	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

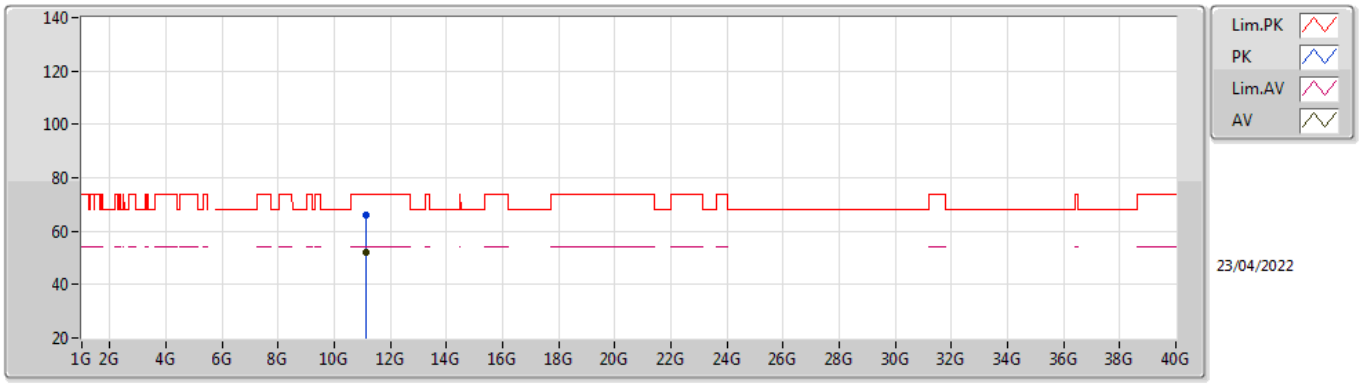


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.14464G	66.08	74.00	-7.92	52.07	3	Horizontal	147	1.79	-	38.54	10.67	35.20
AV	11.14248G	52.14	54.00	-1.86	38.13	3	Horizontal	147	1.79	-	38.54	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

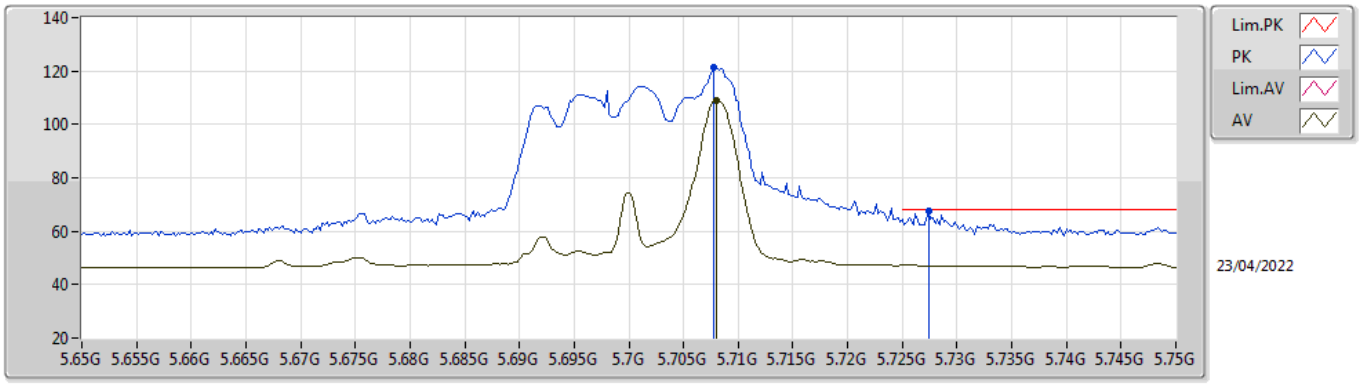


EUT Y_2TX
Setting 11.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7078G	121.13	Inf	-Inf	114.90	3	Vertical	77	1.90	-	34.28	7.40	35.45
AV	5.708G	109.12	Inf	-Inf	102.89	3	Vertical	77	1.90	-	34.28	7.40	35.45
PK	5.7274G	67.50	68.20	-0.70	61.31	3	Vertical	77	1.90	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

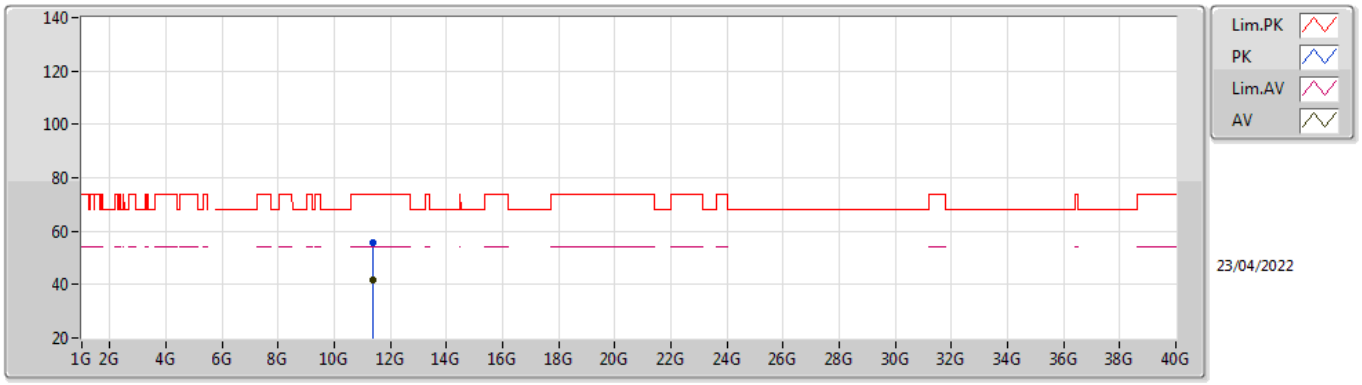


EUT Y_2TX
Setting 11.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.40064G	55.57	74.00	-18.43	41.55	3	Vertical	25	2.32	-	38.80	10.71	35.49
AV	11.39592G	41.58	54.00	-12.42	27.55	3	Vertical	25	2.32	-	38.80	10.71	35.48

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

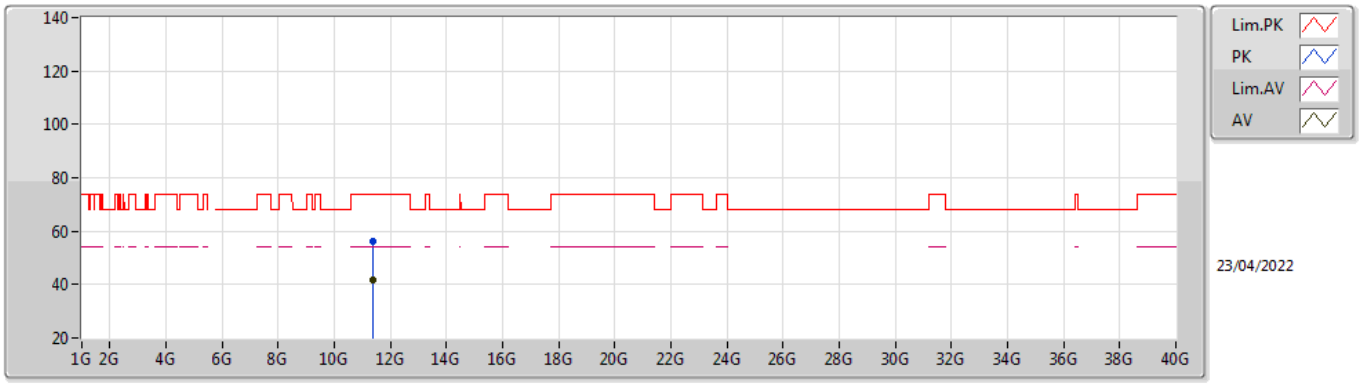


EUT Y_2TX
Setting 11.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.39894G	56.17	74.00	-17.83	42.15	3	Horizontal	140	1.96	-	38.80	10.71	35.49
AV	11.39916G	41.54	54.00	-12.46	27.52	3	Horizontal	140	1.96	-	38.80	10.71	35.49

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

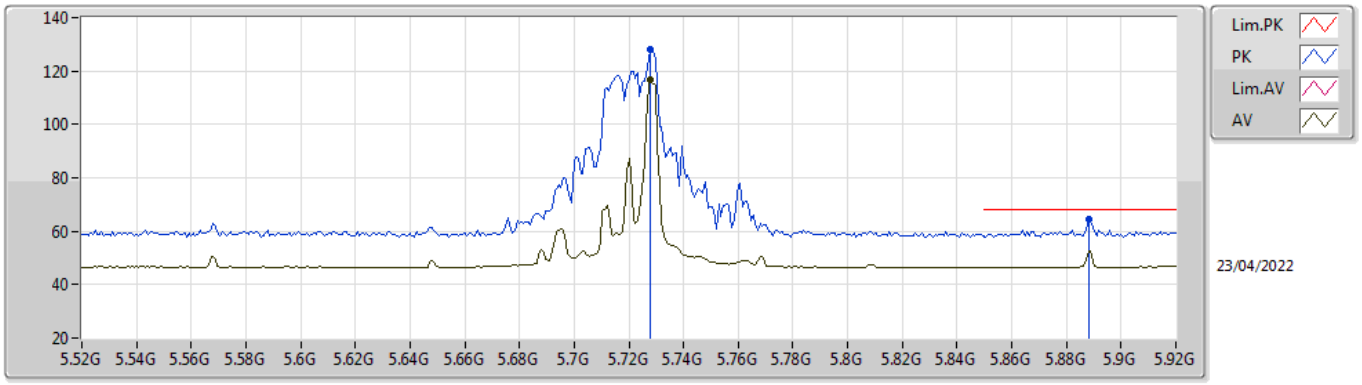


EUT Y_2TX
Setting 18.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.728G	128.03	Inf	-Inf	121.85	3	Vertical	78	1.80	-	34.24	7.40	35.46
AV	5.728G	116.69	Inf	-Inf	110.51	3	Vertical	78	1.80	-	34.24	7.40	35.46
PK	5.888G	64.41	68.20	-3.79	57.93	3	Vertical	78	1.80	-	34.53	7.49	35.54

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

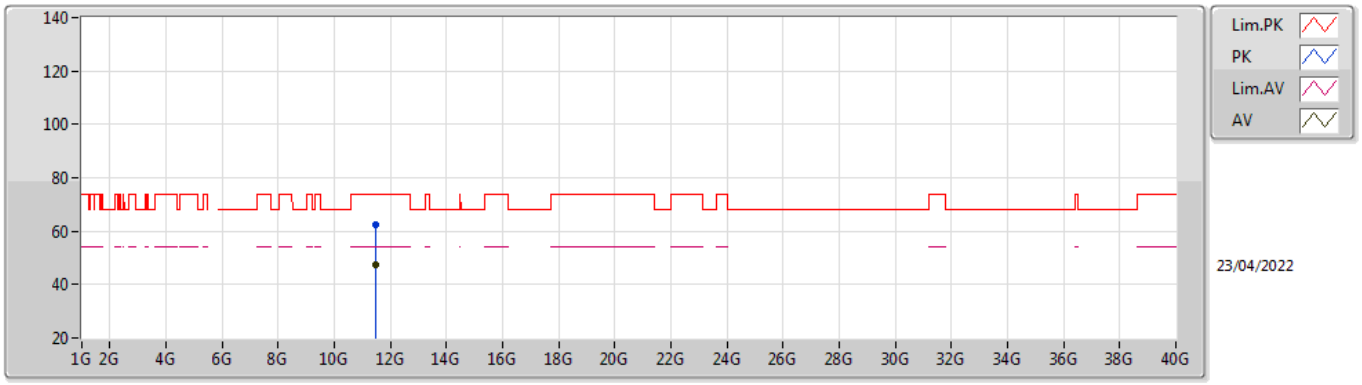


EUT Y_2TX
Setting 18.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.45576G	62.17	74.00	-11.83	48.09	3	Vertical	189	1.82	-	38.91	10.72	35.55
AV	11.45616G	47.35	54.00	-6.65	33.27	3	Vertical	189	1.82	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

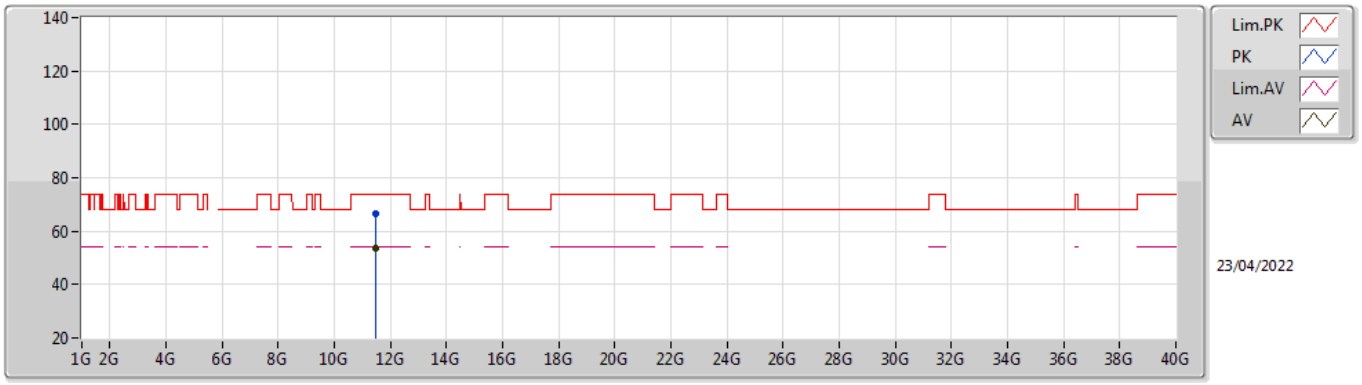


EUT Y_2TX
Setting 18.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.4572G	66.72	74.00	-7.28	52.64	3	Horizontal	147	1.61	-	38.91	10.72	35.55
AV	11.45696G	53.78	54.00	-0.22	39.70	3	Horizontal	147	1.61	-	38.91	10.72	35.55

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

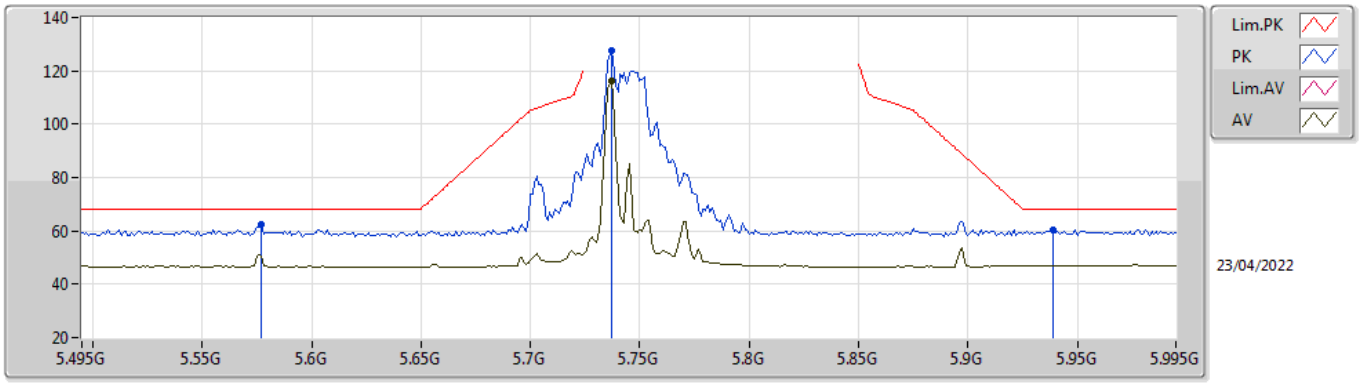


EUT Y_2TX
Setting 19.25
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.577G	62.38	68.20	-5.82	55.79	3	Vertical	77	1.89	-	34.60	7.38	35.39
PK	5.737G	127.60	Inf	-Inf	121.44	3	Vertical	77	1.89	-	34.23	7.40	35.47
AV	5.737G	116.34	Inf	-Inf	110.18	3	Vertical	77	1.89	-	34.23	7.40	35.47
PK	5.939G	60.36	68.20	-7.84	53.63	3	Vertical	77	1.89	-	34.76	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

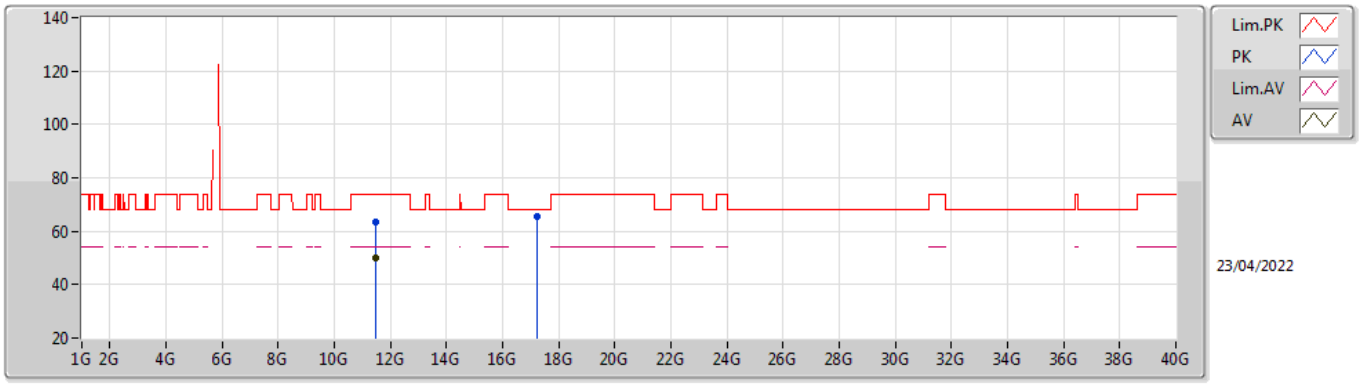


EUT Y_2TX
Setting 19.25
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.47328G	63.39	74.00	-10.61	49.29	3	Vertical	203	1.80	-	38.95	10.72	35.57
AV	11.47312G	49.92	54.00	-4.08	35.82	3	Vertical	203	1.80	-	38.95	10.72	35.57
PK	17.23414G	65.77	68.20	-2.43	45.59	3	Vertical	293	1.81	-	40.80	14.26	34.88

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

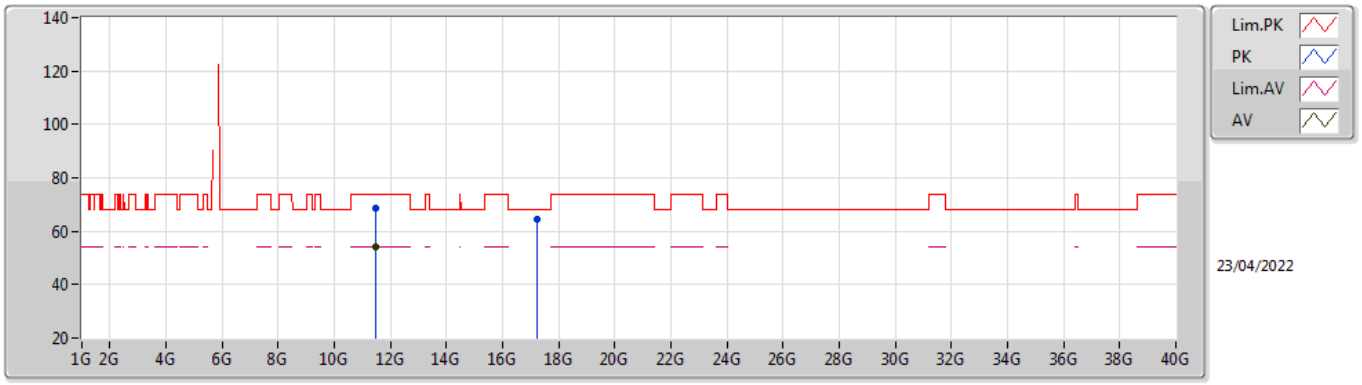


EUT Y_2TX
Setting 19.25
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.47192G	68.81	74.00	-5.19	54.72	3	Horizontal	143	1.76	-	38.94	10.72	35.57
AV	11.47264G	53.99	54.00	-0.01	39.89	3	Horizontal	143	1.76	-	38.95	10.72	35.57
PK	17.2348G	64.40	68.20	-3.80	44.21	3	Horizontal	300	1.20	-	40.81	14.26	34.88

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

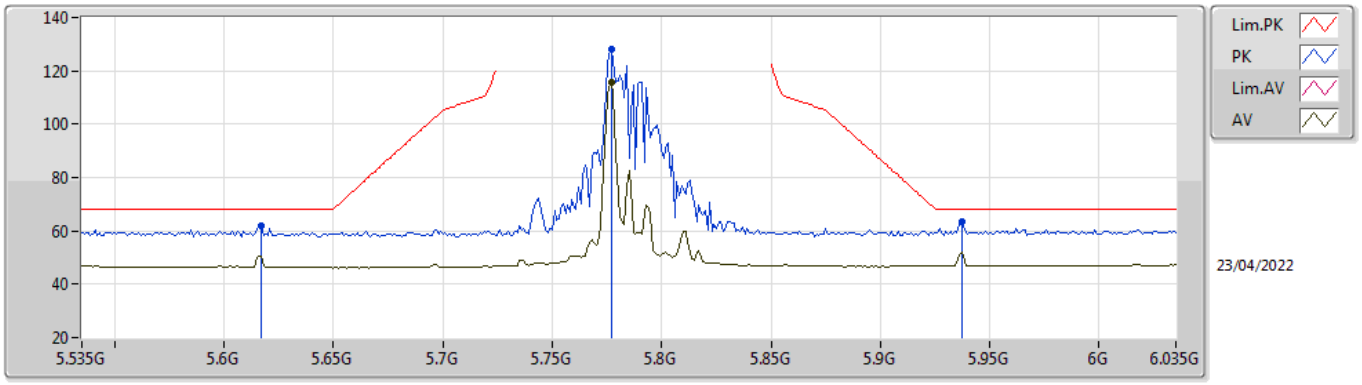


EUT Y_2TX
Setting 18.25
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.617G	61.75	68.20	-6.45	55.19	3	Vertical	77	1.76	-	34.57	7.40	35.41
PK	5.777G	128.07	Inf	-Inf	121.96	3	Vertical	77	1.76	-	34.20	7.40	35.49
AV	5.777G	115.47	Inf	-Inf	109.36	3	Vertical	77	1.76	-	34.20	7.40	35.49
PK	5.937G	63.31	68.20	-4.89	56.59	3	Vertical	77	1.76	-	34.75	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

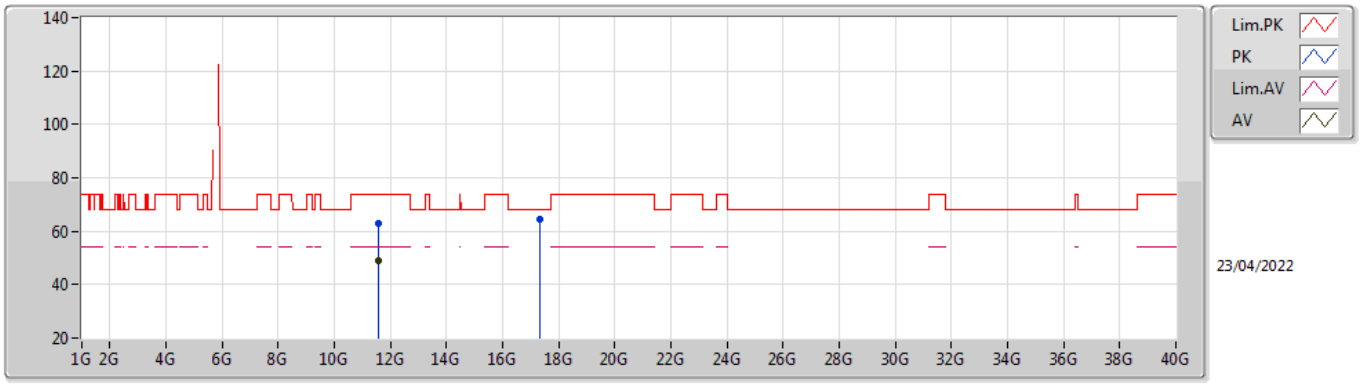


EUT Y_2TX
Setting 18.25
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.55288G	63.13	74.00	-10.87	48.78	3	Vertical	197	1.80	-	39.21	10.73	35.59
AV	11.55312G	49.02	54.00	-4.98	34.67	3	Vertical	197	1.80	-	39.21	10.73	35.59
PK	17.35042G	64.55	68.20	-3.65	43.70	3	Vertical	281	1.04	-	41.40	14.35	34.90

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

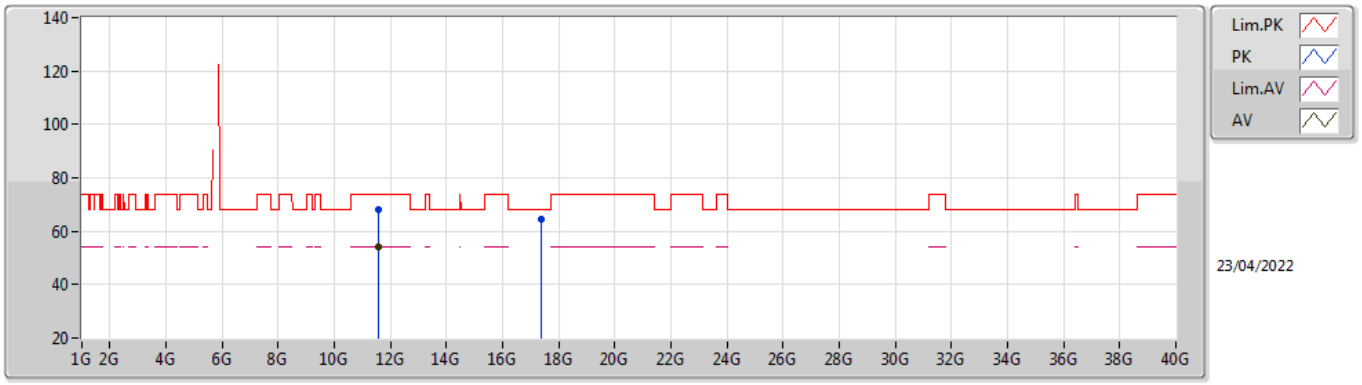


EUT Y_2TX
Setting 18.25
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.55184G	68.28	74.00	-5.72	53.93	3	Horizontal	148	1.80	-	39.21	10.73	35.59
AV	11.55272G	53.91	54.00	-0.09	39.56	3	Horizontal	148	1.80	-	39.21	10.73	35.59
PK	17.35444G	64.40	68.20	-3.80	43.53	3	Horizontal	109	2.26	-	41.42	14.35	34.90

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

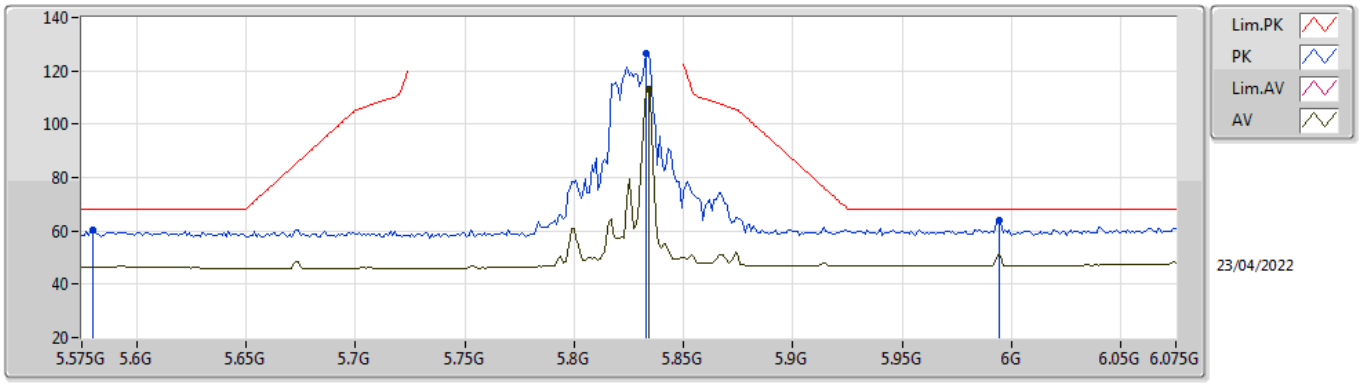


EUT Y_2TX
Setting 18
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.58G	60.56	68.20	-7.64	53.97	3	Vertical	80	1.80	-	34.60	7.38	35.39
PK	5.833G	126.81	Inf	-Inf	120.63	3	Vertical	80	1.80	-	34.27	7.43	35.52
AV	5.834G	113.36	Inf	-Inf	107.18	3	Vertical	80	1.80	-	34.27	7.43	35.52
PK	5.994G	64.14	68.20	-4.06	57.35	3	Vertical	80	1.80	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

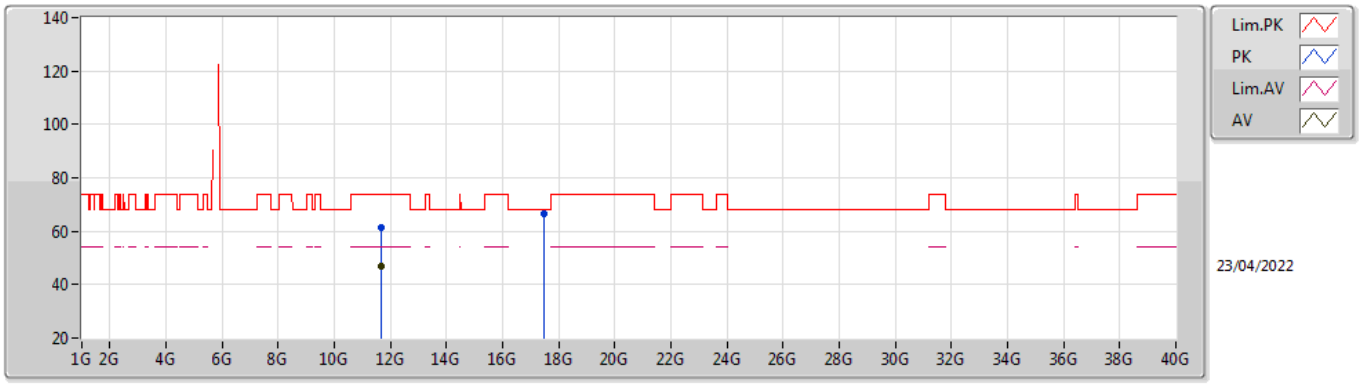


EUT Y_2TX
Setting 18
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.66744G	61.45	74.00	-12.55	46.86	3	Vertical	198	1.91	-	39.40	10.75	35.56
AV	11.66736G	46.64	54.00	-7.36	32.05	3	Vertical	198	1.91	-	39.40	10.75	35.56
PK	17.47464G	66.63	68.20	-1.57	44.84	3	Vertical	182	1.81	-	42.27	14.43	34.91

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

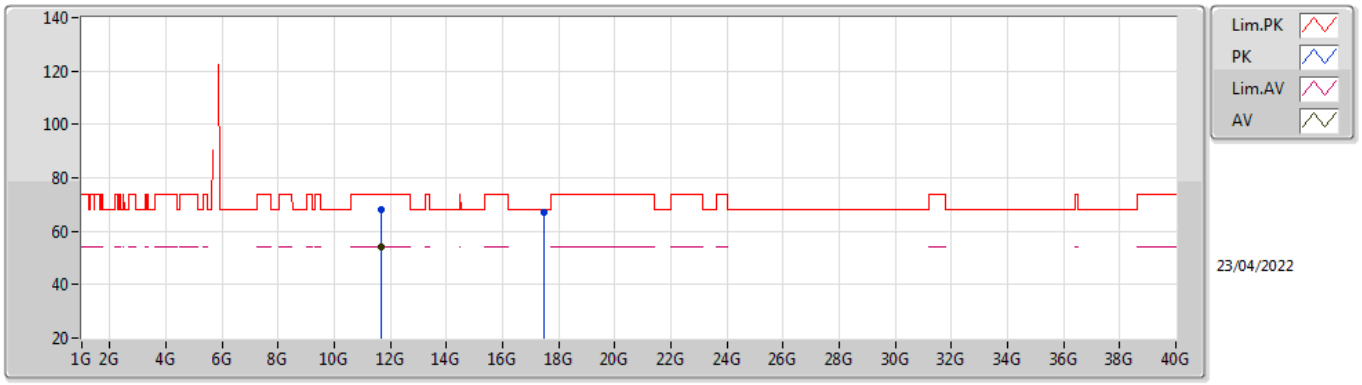

EUT Y_2TX
Setting 18
03-C-K-5


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.66744G	68.23	74.00	-5.77	53.64	3	Horizontal	146	1.80	-	39.40	10.75	35.56
AV	11.66688G	53.99	54.00	-0.01	39.40	3	Horizontal	146	1.80	-	39.40	10.75	35.56
PK	17.47982G	67.11	68.20	-1.09	45.26	3	Horizontal	213	1.82	-	42.32	14.44	34.91

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	PK	5.7256G	68.04	68.20	-0.16	3	Vertical	76	1.90	-

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

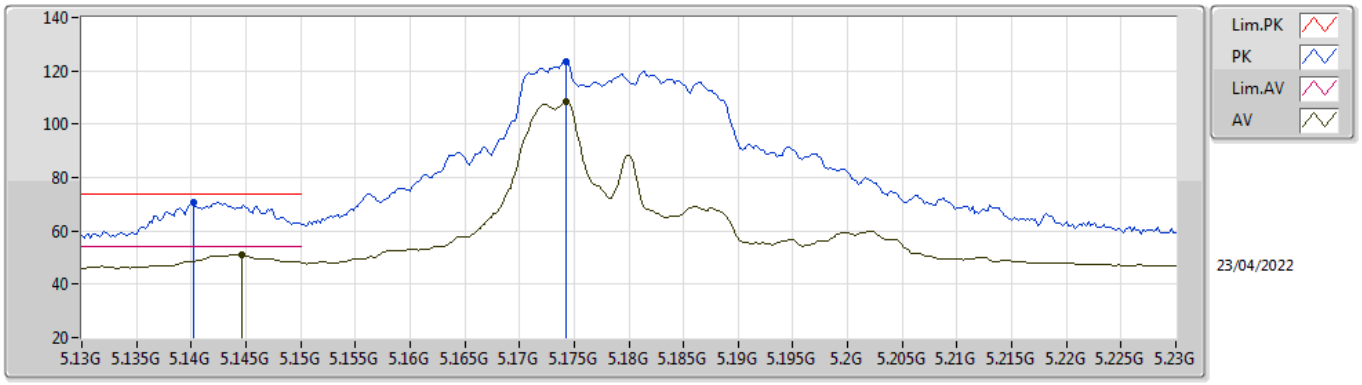


EUT Y_2TX
Setting 19
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1402G	70.83	74.00	-3.17	65.02	3	Vertical	75	1.92	-	33.98	7.17	35.34
AV	5.1446G	51.22	54.00	-2.78	45.40	3	Vertical	75	1.92	-	33.99	7.17	35.34
PK	5.1742G	123.57	Inf	-Inf	117.62	3	Vertical	75	1.92	-	34.10	7.19	35.34
AV	5.1742G	108.21	Inf	-Inf	102.26	3	Vertical	75	1.92	-	34.10	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

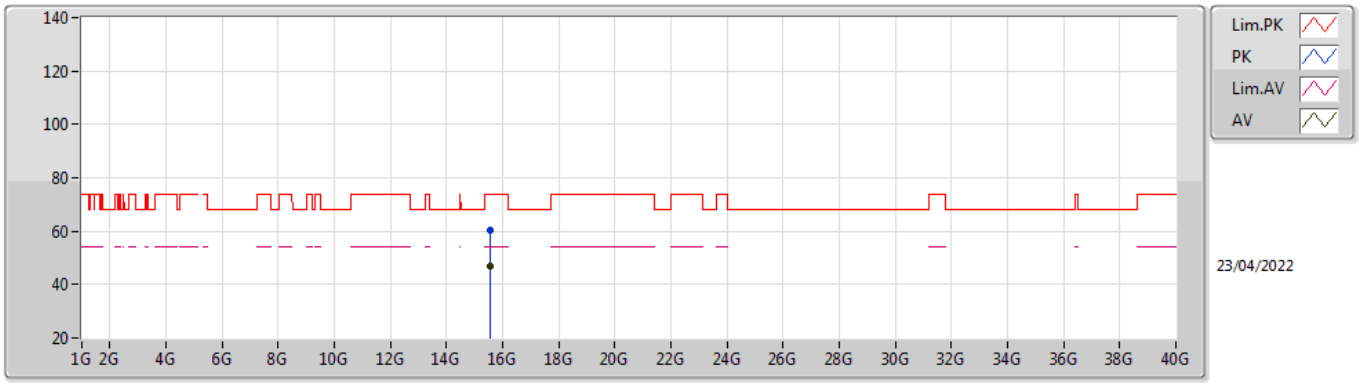


EUT Y_2TX
Setting 19
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.54054G	60.52	74.00	-13.48	44.33	3	Vertical	125	1.08	-	38.42	13.17	35.40
AV	15.53556G	46.71	54.00	-7.29	30.49	3	Vertical	125	1.08	-	38.45	13.17	35.40

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

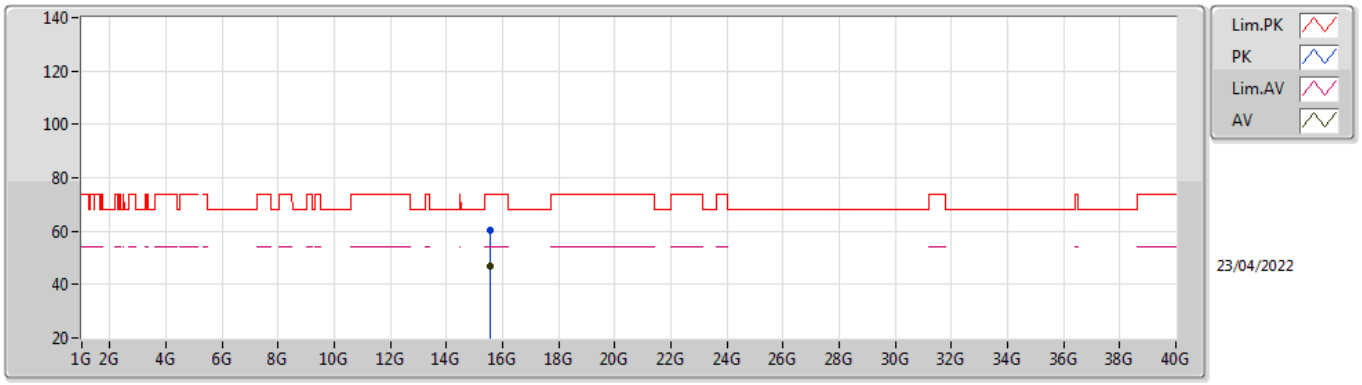


EUT Y_2TX
Setting 19
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.53664G	60.36	74.00	-13.64	44.15	3	Horizontal	92	2.68	-	38.44	13.17	35.40
AV	15.5352G	46.71	54.00	-7.29	30.49	3	Horizontal	92	2.68	-	38.45	13.17	35.40

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

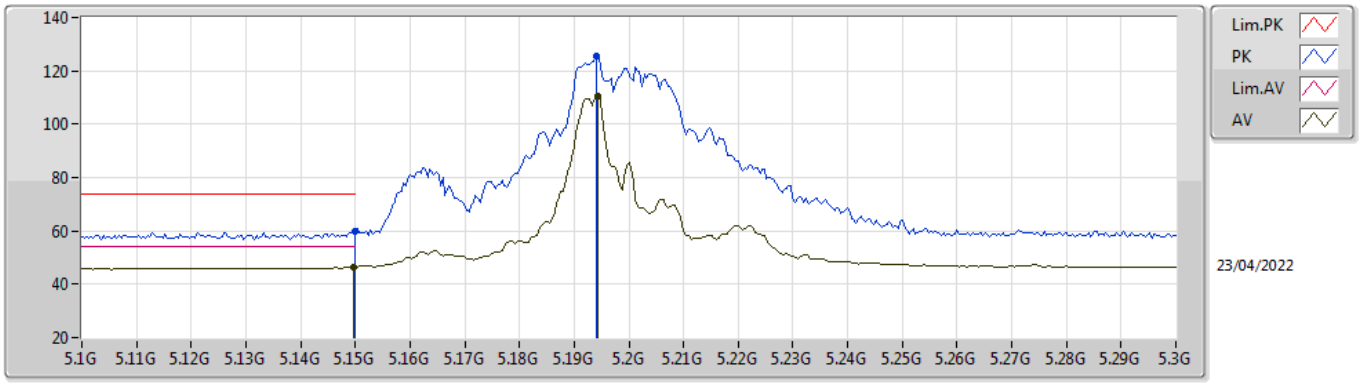


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.15G	59.75	74.00	-14.25	53.92	3	Vertical	74	1.80	-	34.00	7.17	35.34
AV	5.1496G	46.32	54.00	-7.68	40.49	3	Vertical	74	1.80	-	34.00	7.17	35.34
PK	5.194G	125.35	Inf	-Inf	119.31	3	Vertical	74	1.80	-	34.18	7.20	35.34
AV	5.1944G	110.53	Inf	-Inf	104.49	3	Vertical	74	1.80	-	34.18	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

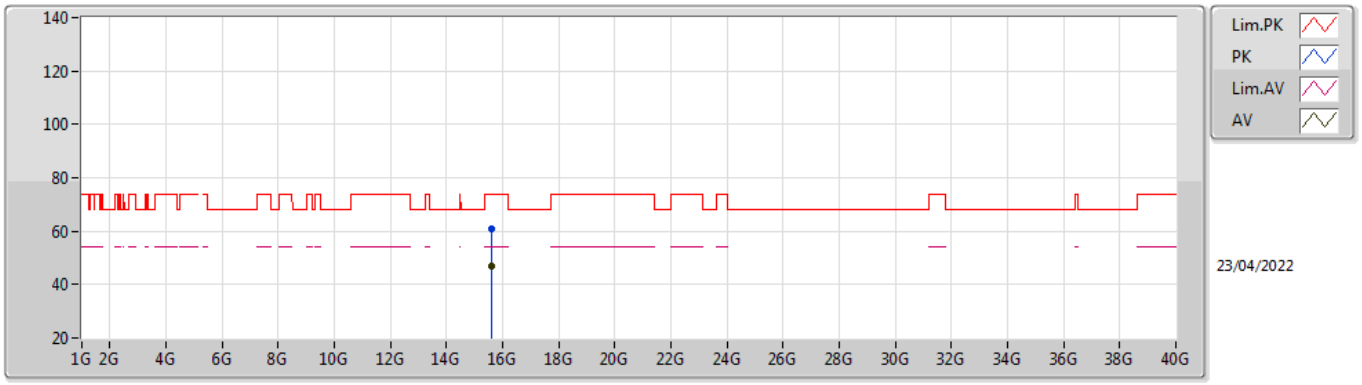


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.60404G	60.84	74.00	-13.16	45.12	3	Vertical	239	2.24	-	37.98	13.20	35.46
AV	15.59748G	47.07	54.00	-6.93	31.30	3	Vertical	239	2.24	-	38.02	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

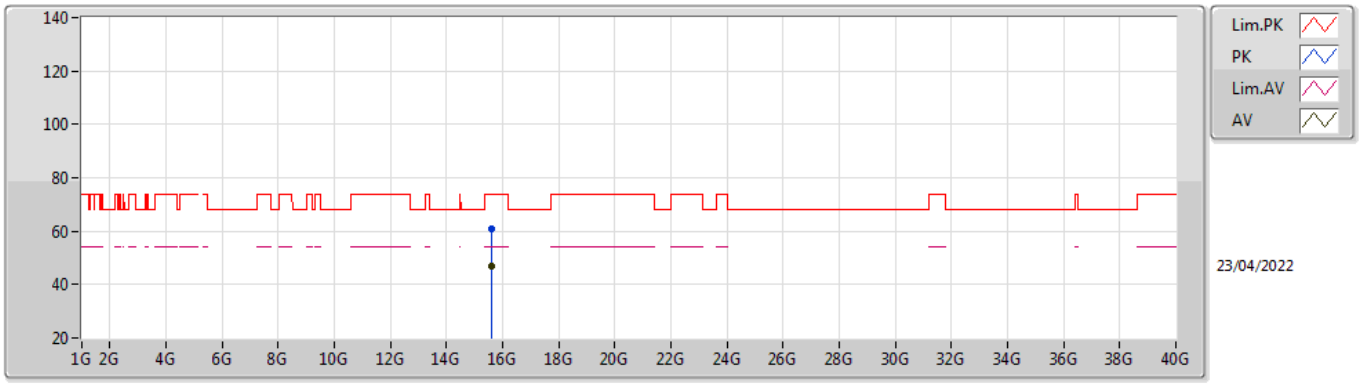


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.59784G	60.87	74.00	-13.13	45.10	3	Horizontal	354	2.93	-	38.02	13.20	35.45
AV	15.59776G	47.01	54.00	-6.99	31.24	3	Horizontal	354	2.93	-	38.02	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

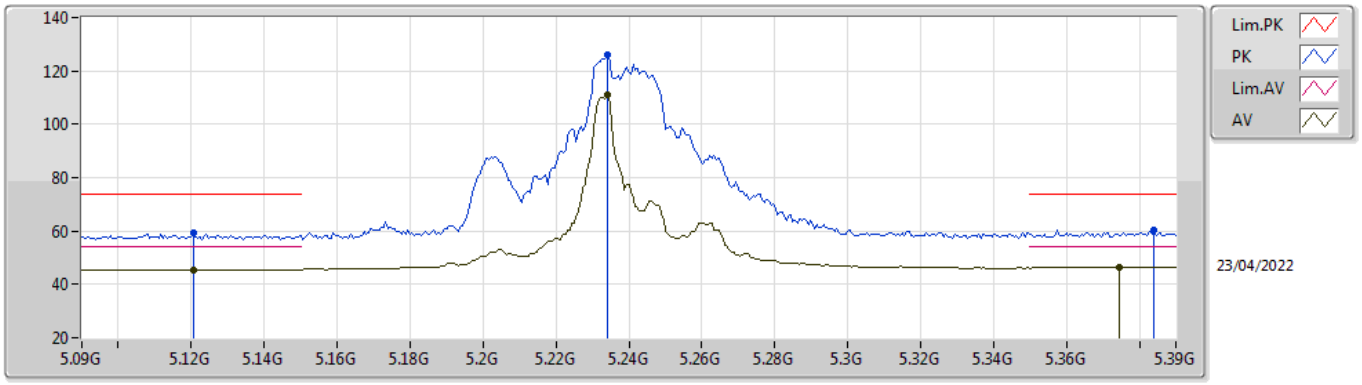


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1206G	59.24	74.00	-14.76	53.47	3	Vertical	74	1.98	-	33.94	7.16	35.33
AV	5.1206G	45.60	54.00	-8.40	39.83	3	Vertical	74	1.98	-	33.94	7.16	35.33
PK	5.234G	126.05	Inf	-Inf	119.85	3	Vertical	74	1.98	-	34.34	7.20	35.34
AV	5.234G	110.96	Inf	-Inf	104.76	3	Vertical	74	1.98	-	34.34	7.20	35.34
PK	5.384G	60.46	74.00	-13.54	54.04	3	Vertical	74	1.98	-	34.57	7.20	35.35
AV	5.3744G	46.60	54.00	-7.40	40.19	3	Vertical	74	1.98	-	34.55	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

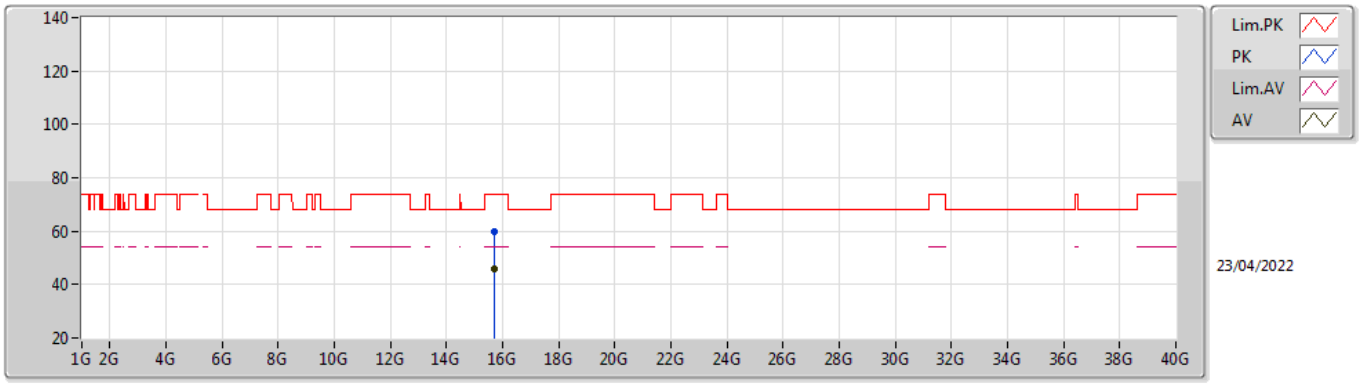


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.71738G	60.00	74.00	-14.00	44.72	3	Vertical	270	1.22	-	37.57	13.26	35.55
AV	15.72402G	45.84	54.00	-8.16	30.54	3	Vertical	270	1.22	-	37.60	13.26	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

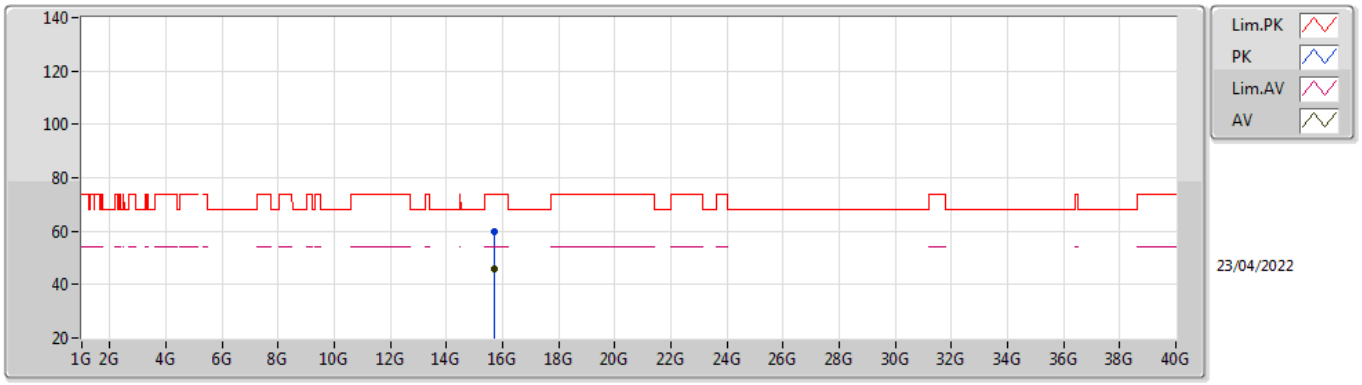


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7204G	59.88	74.00	-14.12	44.60	3	Horizontal	343	2.96	-	37.58	13.26	35.56
AV	15.72404G	45.84	54.00	-8.16	30.54	3	Horizontal	343	2.96	-	37.60	13.26	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

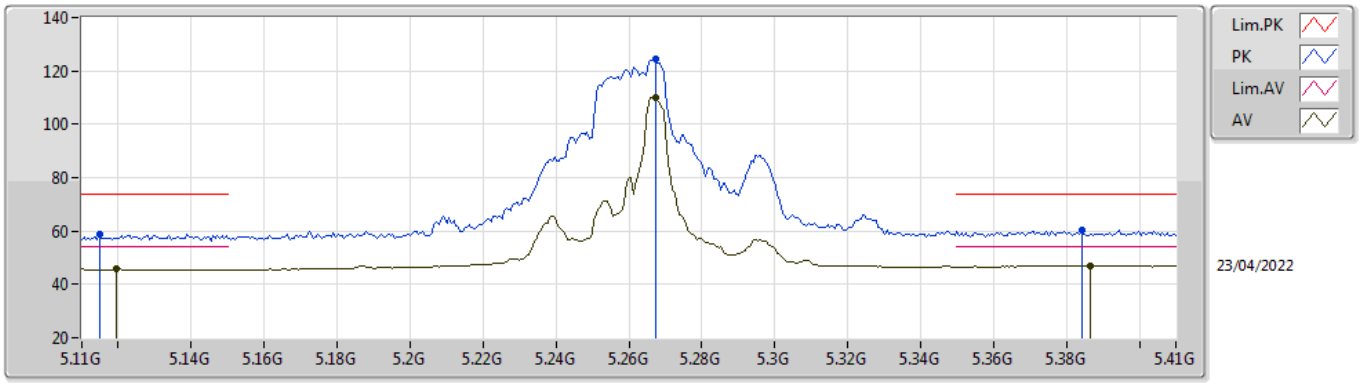


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1148G	58.75	74.00	-15.25	52.99	3	Vertical	76	1.99	-	33.93	7.16	35.33
AV	5.1196G	45.64	54.00	-8.36	39.87	3	Vertical	76	1.99	-	33.94	7.16	35.33
PK	5.2672G	124.43	Inf	-Inf	118.14	3	Vertical	76	1.99	-	34.43	7.20	35.34
AV	5.2672G	110.25	Inf	-Inf	103.96	3	Vertical	76	1.99	-	34.43	7.20	35.34
PK	5.3842G	60.51	74.00	-13.49	54.09	3	Vertical	76	1.99	-	34.57	7.20	35.35
AV	5.3866G	46.94	54.00	-7.06	40.52	3	Vertical	76	1.99	-	34.57	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

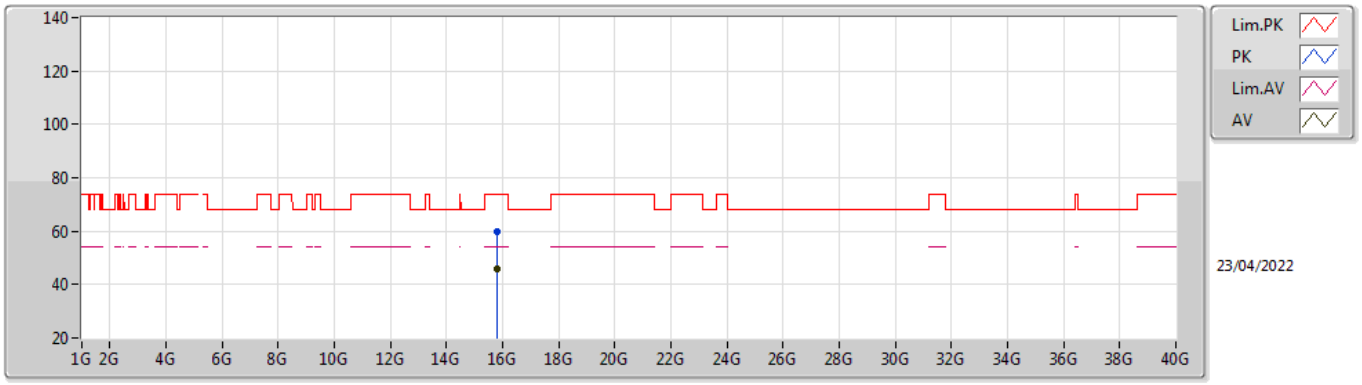


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7821G	59.68	74.00	-14.32	44.17	3	Vertical	179	2.25	-	37.83	13.29	35.61
AV	15.7815G	45.75	54.00	-8.25	30.24	3	Vertical	179	2.25	-	37.83	13.29	35.61

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

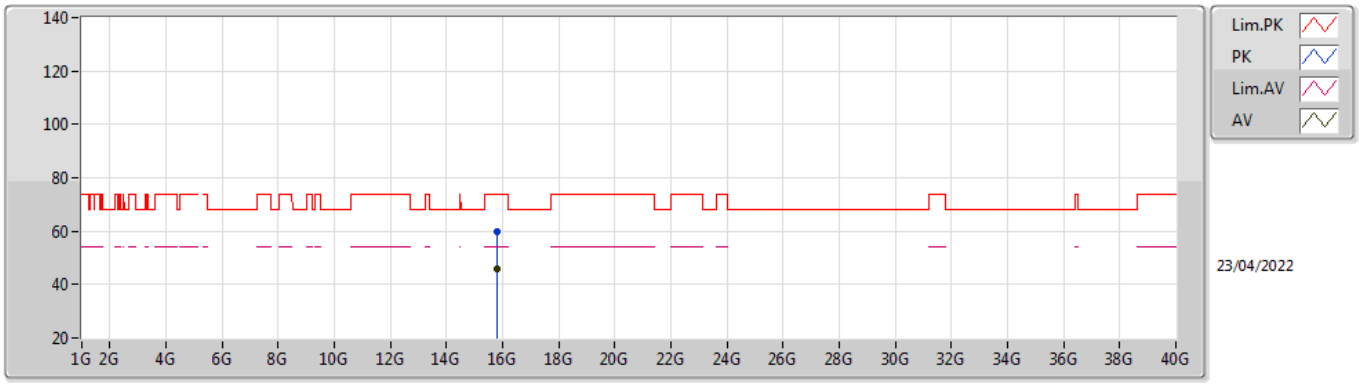


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.78218G	59.68	74.00	-14.32	44.17	3	Horizontal	107	1.43	-	37.83	13.29	35.61
AV	15.78144G	45.76	54.00	-8.24	30.25	3	Horizontal	107	1.43	-	37.83	13.29	35.61

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

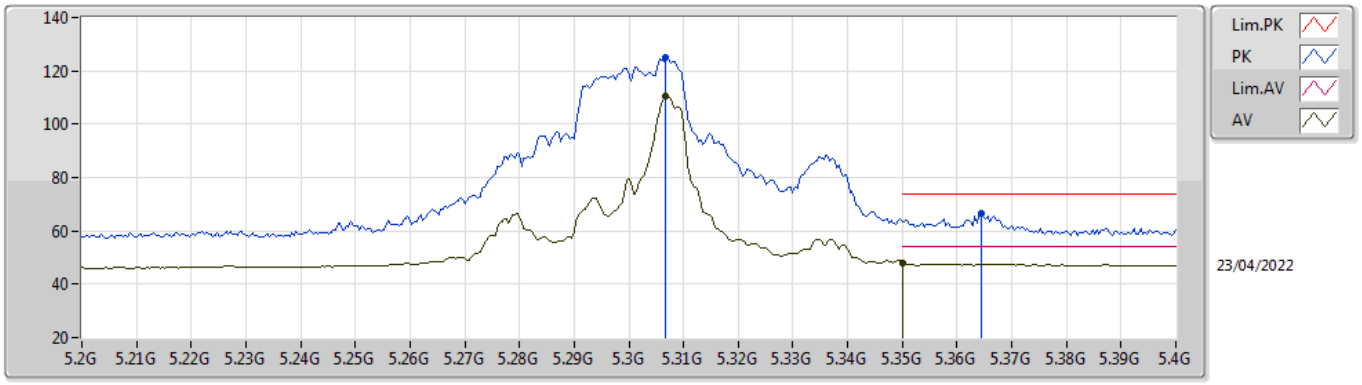


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.3068G	124.91	Inf	-Inf	118.55	3	Vertical	75	1.80	-	34.50	7.20	35.34
AV	5.3068G	110.68	Inf	-Inf	104.32	3	Vertical	75	1.80	-	34.50	7.20	35.34
PK	5.3644G	66.40	74.00	-7.60	60.01	3	Vertical	75	1.80	-	34.53	7.20	35.34
AV	5.35G	48.01	54.00	-5.99	41.65	3	Vertical	75	1.80	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

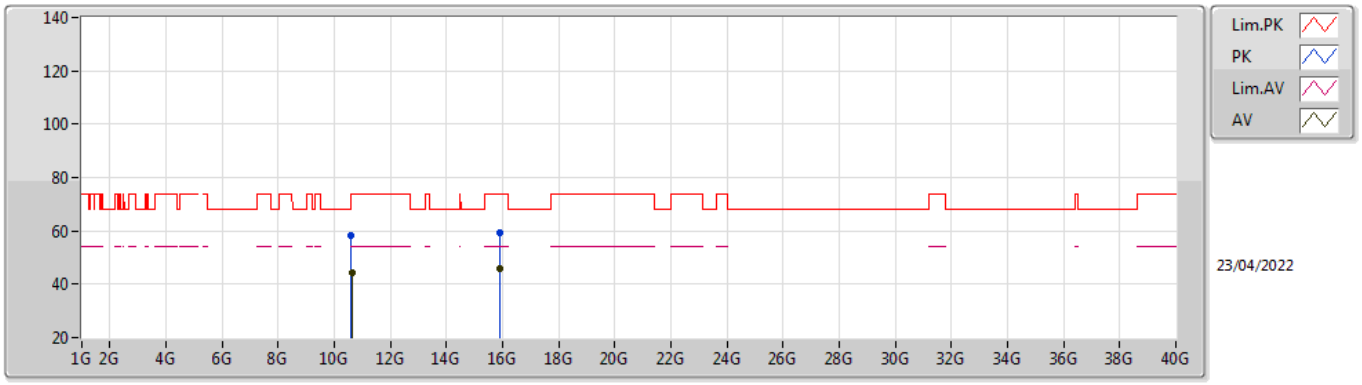


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.61288G	58.25	74.00	-15.75	44.80	3	Vertical	185	2.04	-	38.23	10.59	35.37
AV	10.6152G	44.17	54.00	-9.83	30.72	3	Vertical	185	2.04	-	38.23	10.59	35.37
PK	15.88864G	59.56	74.00	-14.44	44.29	3	Vertical	167	2.46	-	37.63	13.34	35.70
AV	15.91888G	45.96	54.00	-8.04	30.76	3	Vertical	167	2.46	-	37.56	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

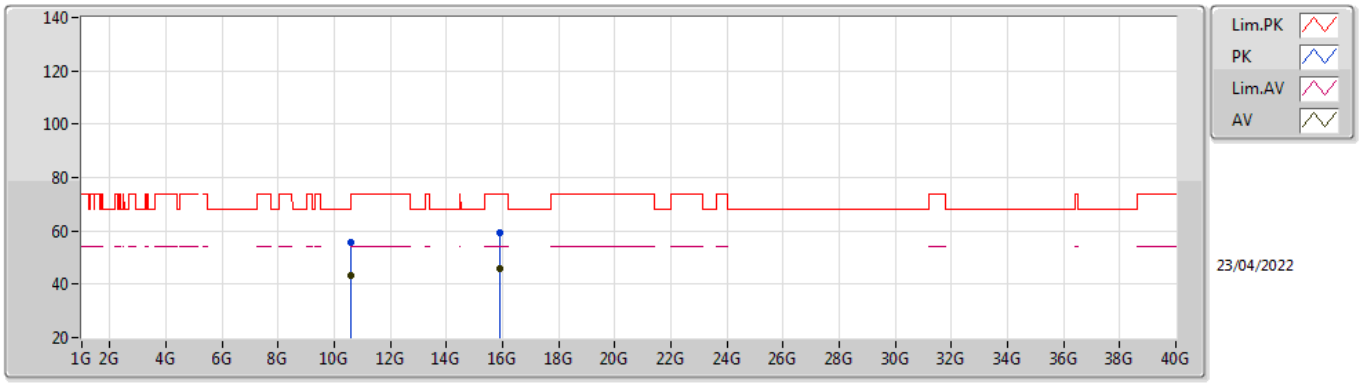


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.61432G	55.74	74.00	-18.26	42.29	3	Horizontal	114	1.77	-	38.23	10.59	35.37
AV	10.61424G	43.28	54.00	-10.72	29.83	3	Horizontal	114	1.77	-	38.23	10.59	35.37
PK	15.89304G	59.29	74.00	-14.71	44.02	3	Horizontal	334	1.29	-	37.62	13.35	35.70
AV	15.88272G	45.95	54.00	-8.05	30.65	3	Horizontal	334	1.29	-	37.65	13.34	35.69

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

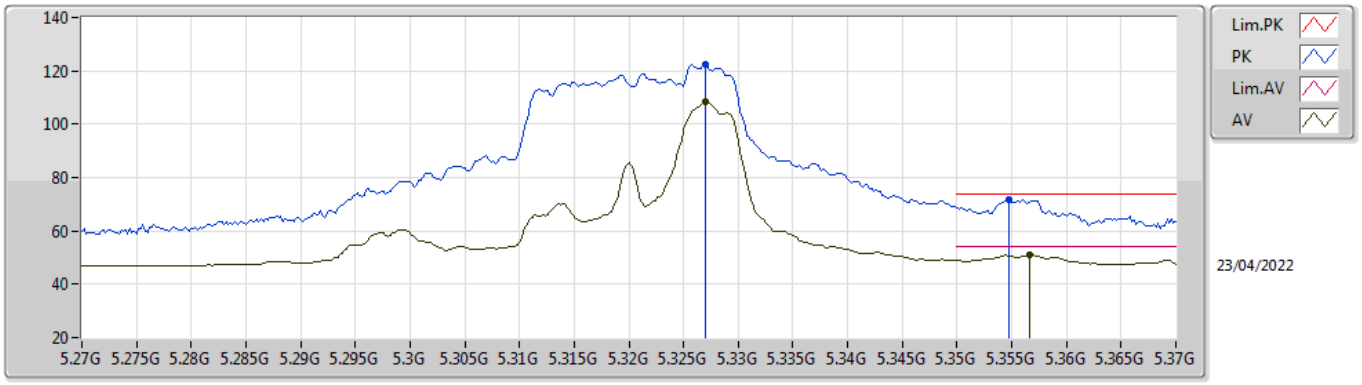


EUT Y_2TX
Setting 17.75
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.327G	122.23	Inf	-Inf	115.87	3	Vertical	74	1.77	-	34.50	7.20	35.34
AV	5.327G	108.32	Inf	-Inf	101.96	3	Vertical	74	1.77	-	34.50	7.20	35.34
PK	5.3548G	71.64	74.00	-2.36	65.27	3	Vertical	74	1.77	-	34.51	7.20	35.34
AV	5.3566G	50.92	54.00	-3.08	44.55	3	Vertical	74	1.77	-	34.51	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

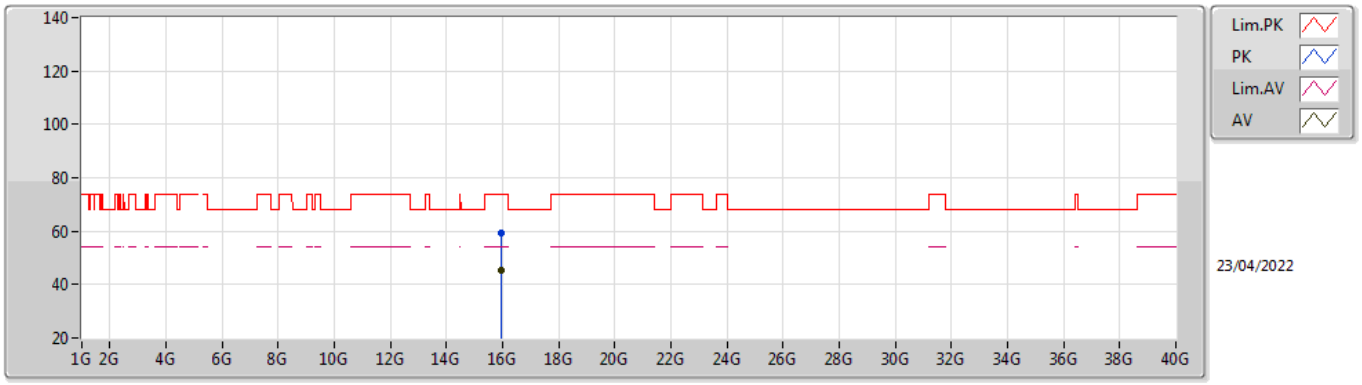


EUT Y_2TX
Setting 17.75
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.96252G	59.22	74.00	-14.78	44.13	3	Vertical	224	2.23	-	37.47	13.38	35.76
AV	15.95714G	45.52	54.00	-8.48	30.40	3	Vertical	224	2.23	-	37.49	13.38	35.75

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

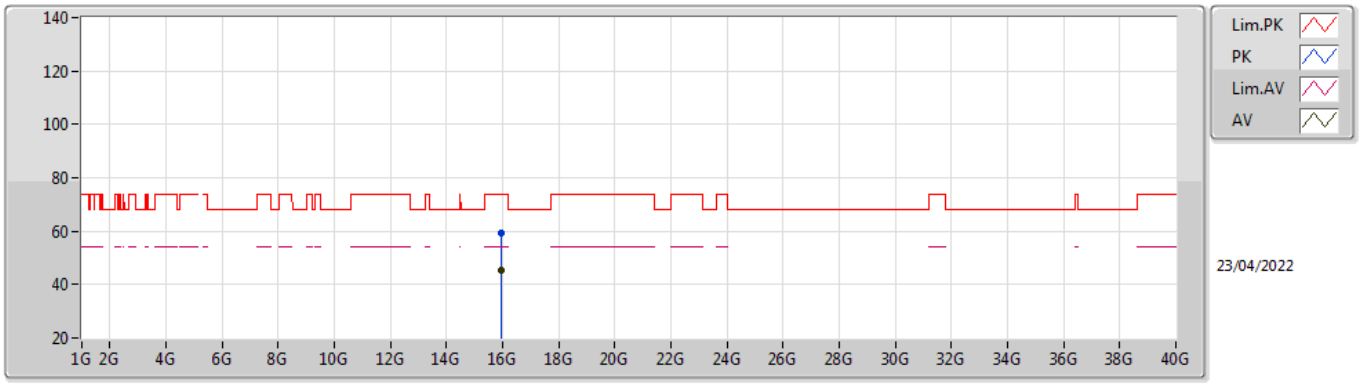


EUT Y_2TX
Setting 17.75
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.9645G	59.37	74.00	-14.63	44.28	3	Horizontal	13	2.58	-	37.47	13.38	35.76
AV	15.95704G	45.54	54.00	-8.46	30.42	3	Horizontal	13	2.58	-	37.49	13.38	35.75

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

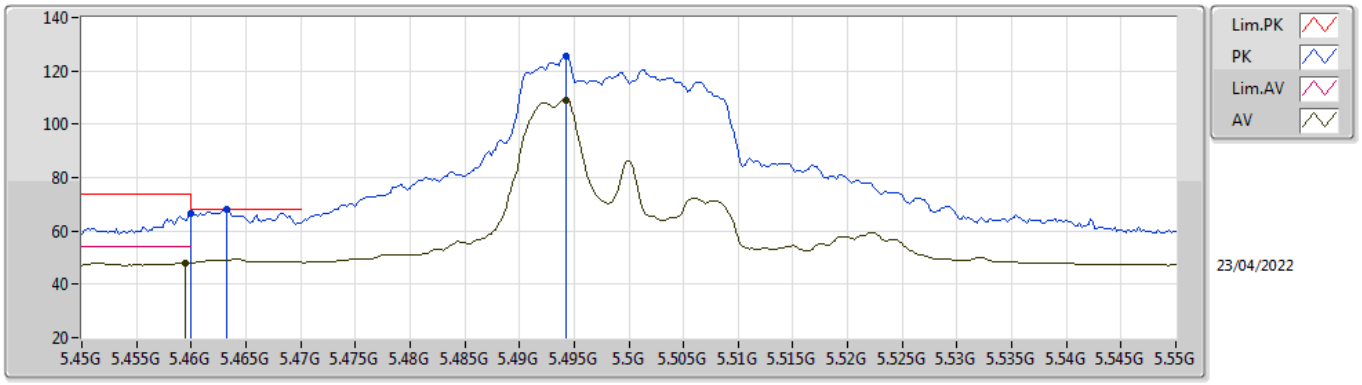


EUT Y_2TX
Setting 17.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.46G	66.76	74.00	-7.24	60.33	3	Vertical	75	1.98	-	34.52	7.26	35.35
AV	5.4594G	48.15	54.00	-5.85	41.72	3	Vertical	75	1.98	-	34.52	7.26	35.35
PK	5.4632G	67.96	68.20	-0.24	61.52	3	Vertical	75	1.98	-	34.53	7.26	35.35
PK	5.4942G	125.38	Inf	-Inf	118.85	3	Vertical	75	1.98	-	34.59	7.29	35.35
AV	5.4942G	109.16	Inf	-Inf	102.63	3	Vertical	75	1.98	-	34.59	7.29	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

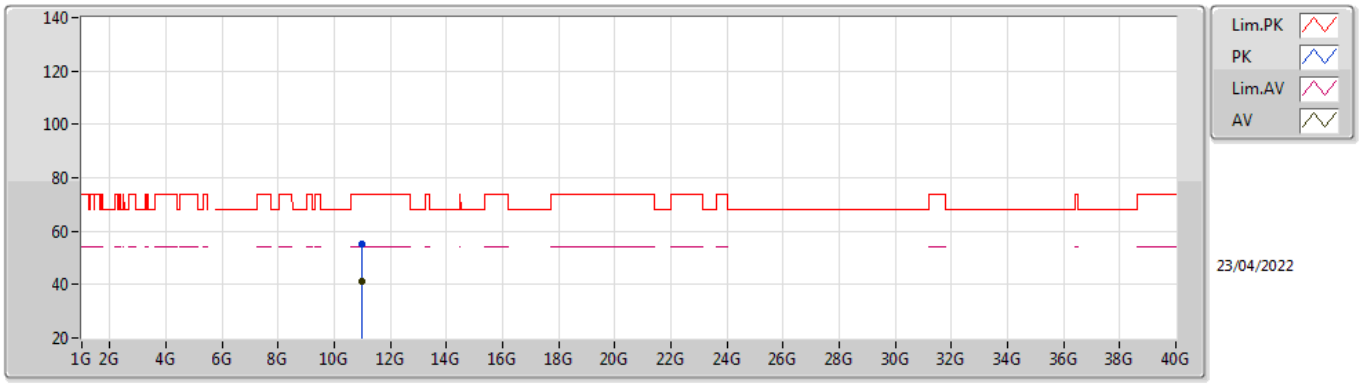


EUT Y_2TX
Setting 17.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.99768G	55.12	74.00	-18.88	41.11	3	Vertical	243	1.95	-	38.40	10.65	35.04
AV	11.00338G	41.40	54.00	-12.60	27.39	3	Vertical	243	1.95	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

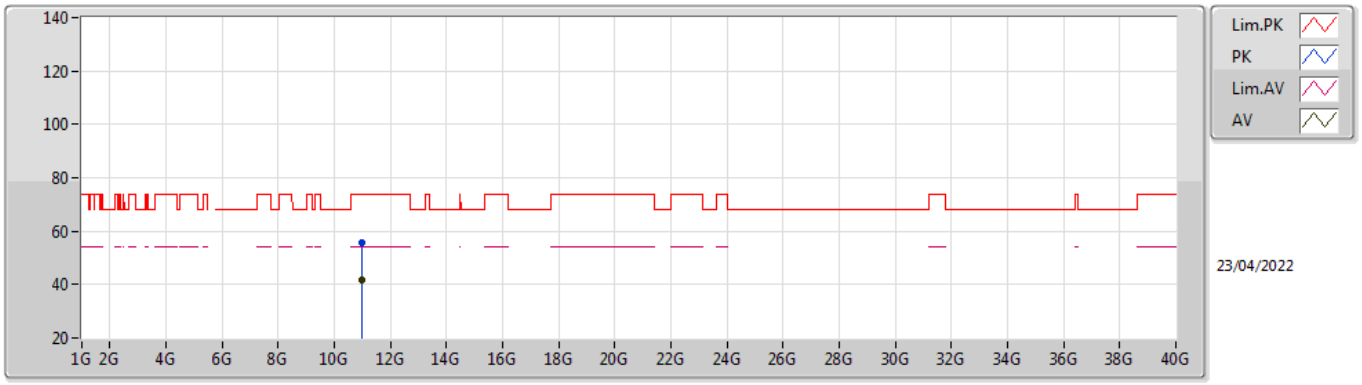


EUT Y_2TX
Setting 17.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.99772G	55.49	74.00	-18.51	41.48	3	Horizontal	317	2.24	-	38.40	10.65	35.04
AV	11.00356G	41.50	54.00	-12.50	27.49	3	Horizontal	317	2.24	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

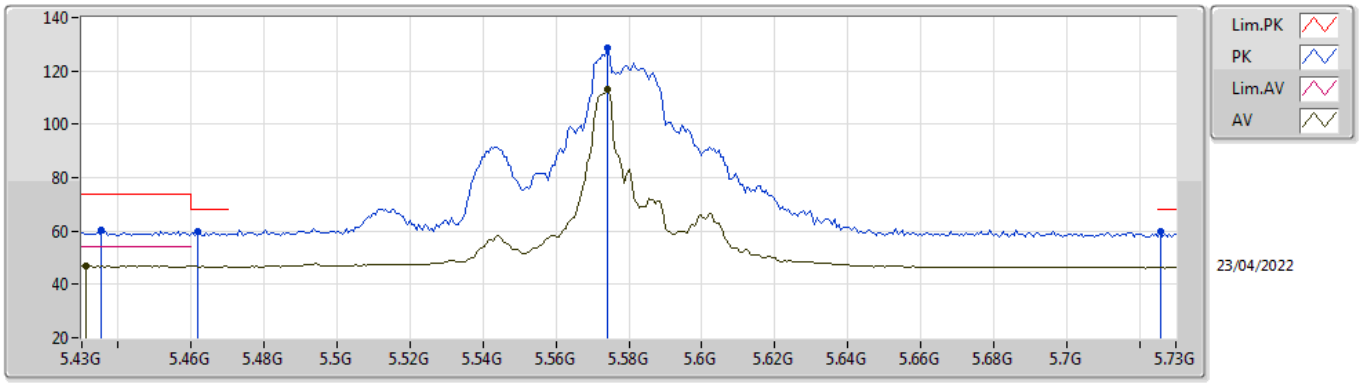


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4354G	60.33	74.00	-13.67	53.91	3	Vertical	75	1.80	-	34.53	7.24	35.35
AV	5.4312G	46.76	54.00	-7.24	40.34	3	Vertical	75	1.80	-	34.54	7.23	35.35
PK	5.4618G	59.80	68.20	-8.40	53.37	3	Vertical	75	1.80	-	34.52	7.26	35.35
PK	5.574G	128.54	Inf	-Inf	121.96	3	Vertical	75	1.80	-	34.60	7.37	35.39
AV	5.574G	112.94	Inf	-Inf	106.36	3	Vertical	75	1.80	-	34.60	7.37	35.39
PK	5.7258G	59.90	68.20	-8.30	53.71	3	Vertical	75	1.80	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

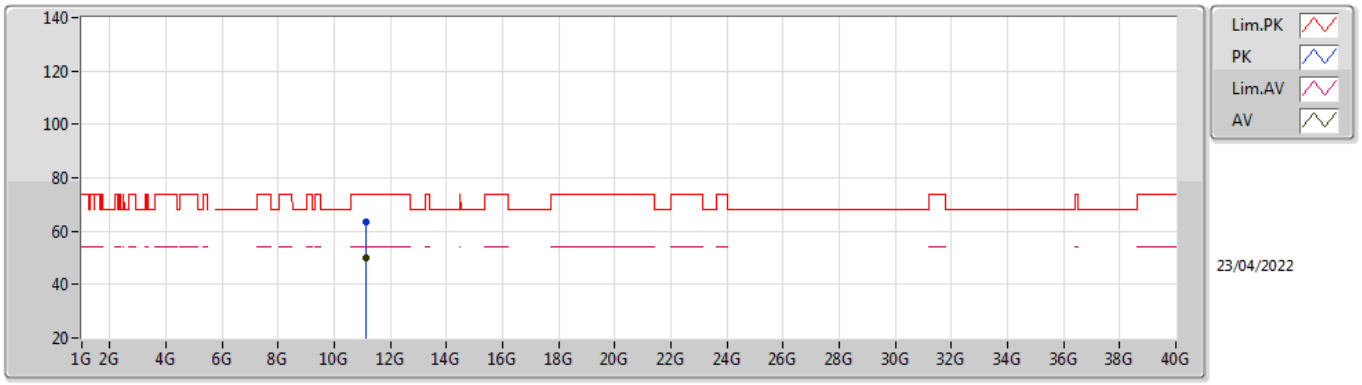


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.14568G	63.41	74.00	-10.59	49.39	3	Vertical	184	1.92	-	38.55	10.67	35.20
AV	11.1456G	49.86	54.00	-4.14	35.84	3	Vertical	184	1.92	-	38.55	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

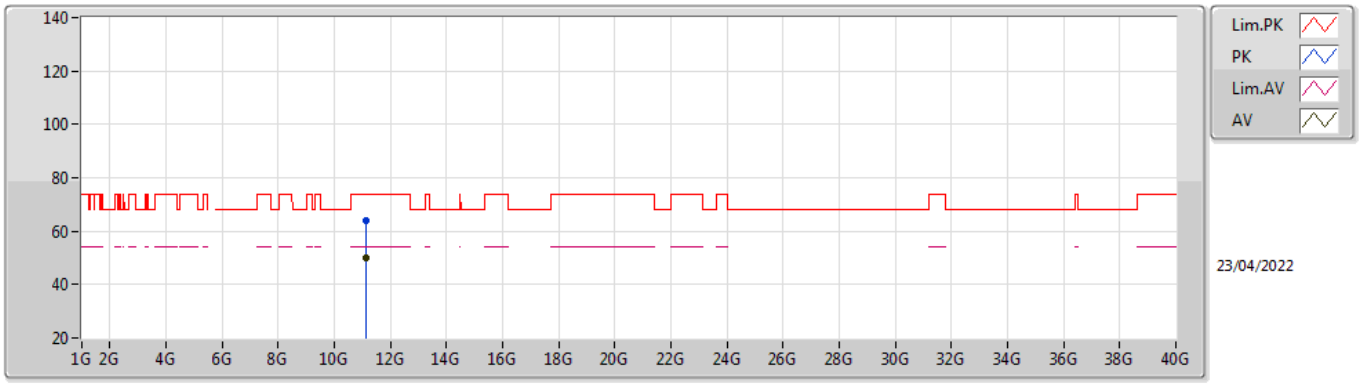


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.14456G	64.01	74.00	-9.99	50.00	3	Horizontal	149	1.07	-	38.54	10.67	35.20
AV	11.1464G	50.17	54.00	-3.83	36.15	3	Horizontal	149	1.07	-	38.55	10.67	35.20

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

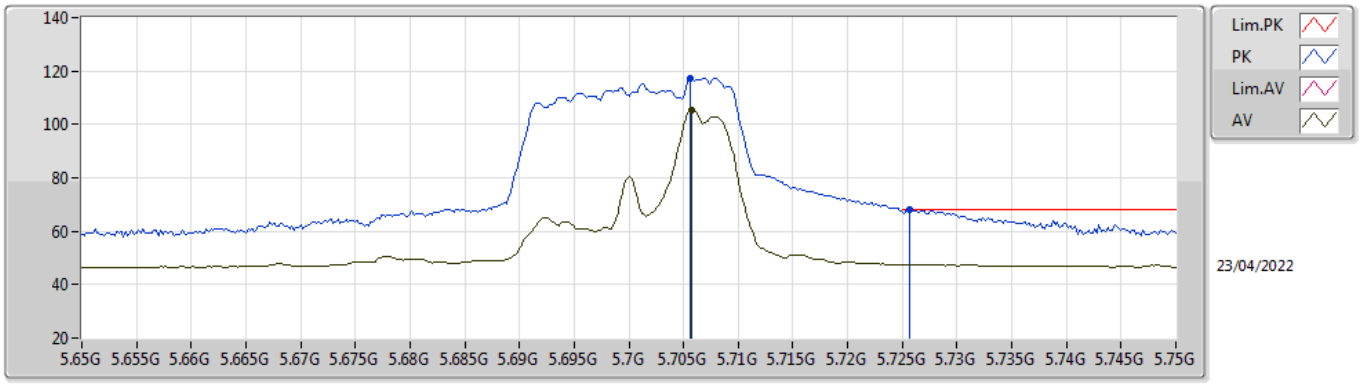


EUT Y_2TX
Setting 12
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7056G	117.33	Inf	-Inf	111.09	3	Vertical	76	1.90	-	34.29	7.40	35.45
AV	5.7058G	105.25	Inf	-Inf	99.01	3	Vertical	76	1.90	-	34.29	7.40	35.45
PK	5.7256G	68.04	68.20	-0.16	61.85	3	Vertical	76	1.90	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

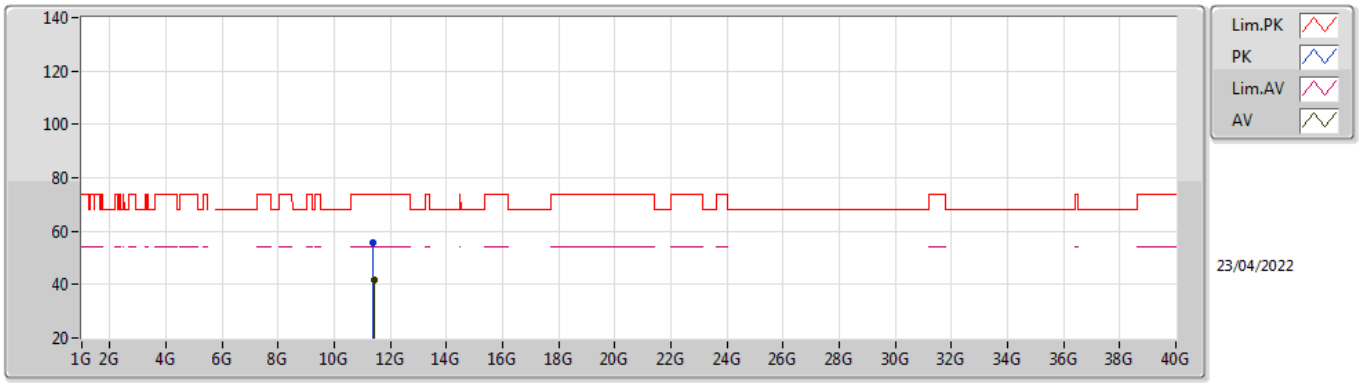


EUT Y_2TX
Setting 12
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.39848G	55.79	74.00	-18.21	41.77	3	Vertical	117	2.18	-	38.80	10.71	35.49
AV	11.40486G	41.94	54.00	-12.06	27.91	3	Vertical	117	2.18	-	38.81	10.71	35.49

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

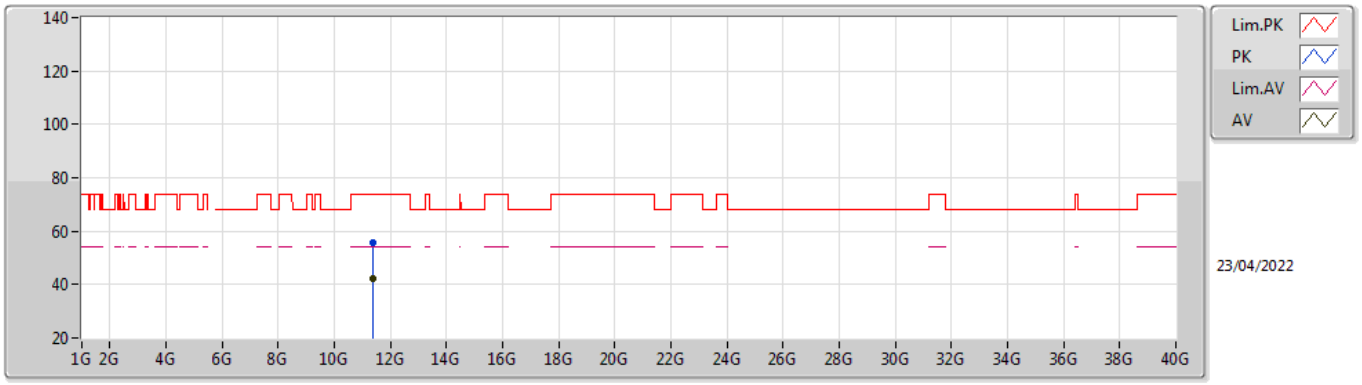


EUT Y_2TX
Setting 12
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.3982G	55.70	74.00	-18.30	41.68	3	Horizontal	114	1.65	-	38.80	10.71	35.49
AV	11.39562G	42.03	54.00	-11.97	28.00	3	Horizontal	114	1.65	-	38.80	10.71	35.48

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

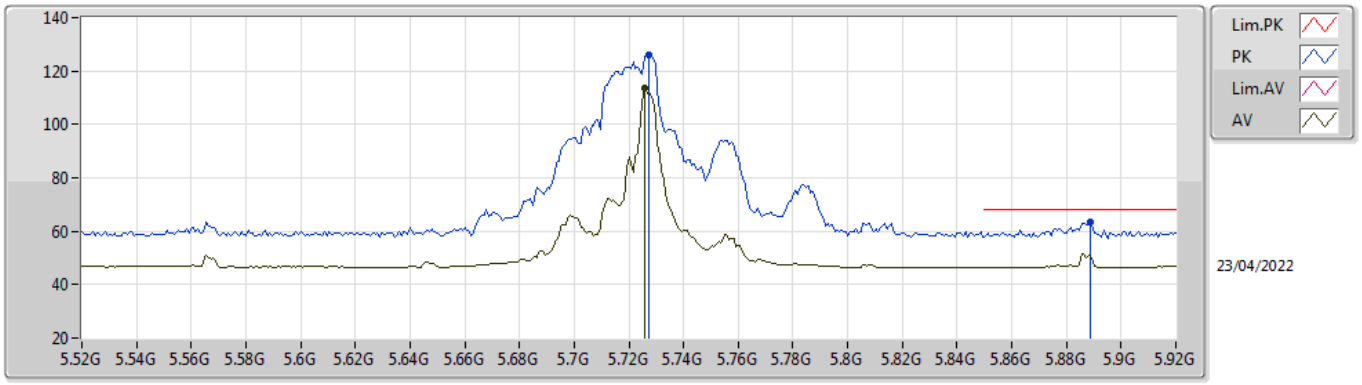


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7272G	126.10	Inf	-Inf	119.91	3	Vertical	78	1.80	-	34.25	7.40	35.46
AV	5.7256G	113.77	Inf	-Inf	107.58	3	Vertical	78	1.80	-	34.25	7.40	35.46
PK	5.8888G	63.68	68.20	-4.52	57.20	3	Vertical	78	1.80	-	34.53	7.49	35.54

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

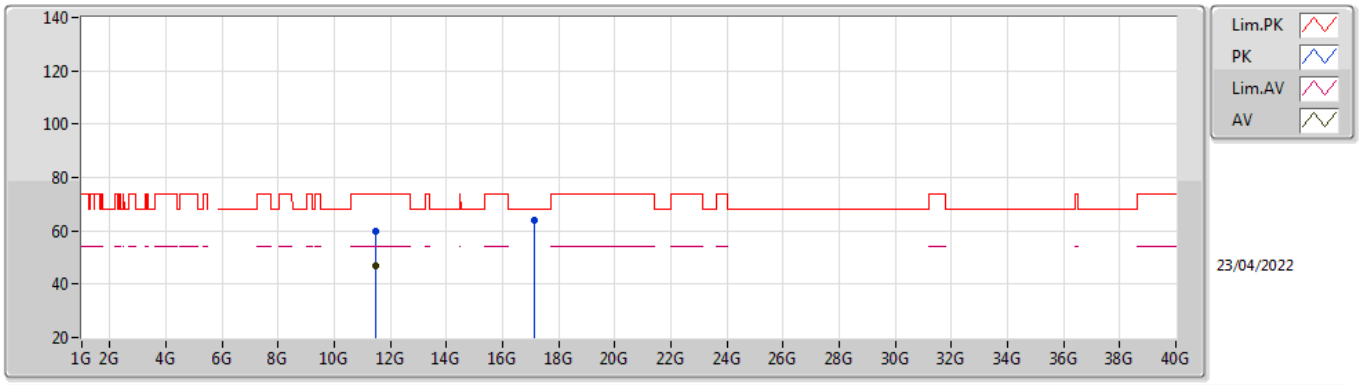


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.45344G	59.80	74.00	-14.20	45.72	3	Vertical	206	1.80	-	38.91	10.72	35.55
AV	11.45328G	46.71	54.00	-7.29	32.63	3	Vertical	206	1.80	-	38.91	10.72	35.55
PK	17.14912G	63.81	68.20	-4.39	44.08	3	Vertical	0	1.80	-	40.40	14.20	34.87

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

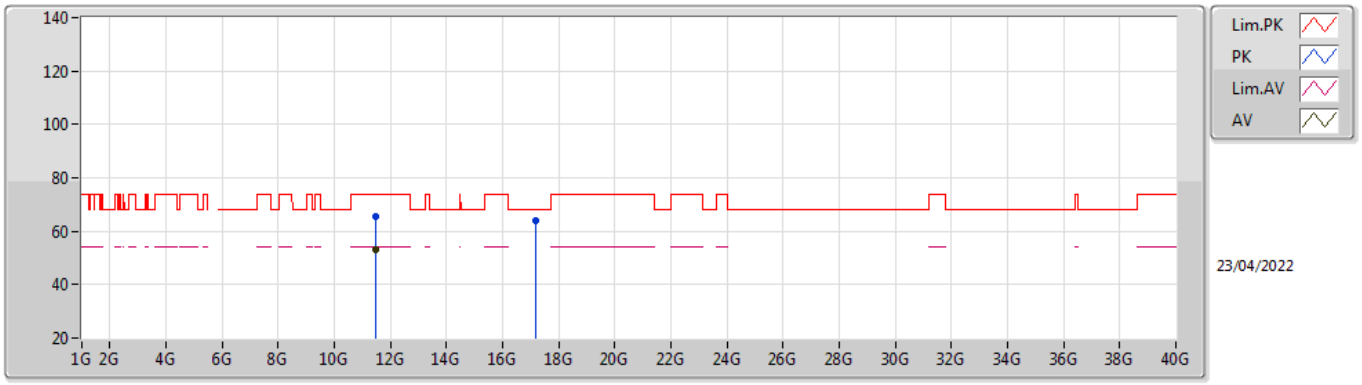


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.45448G	65.45	74.00	-8.55	51.37	3	Horizontal	144	1.80	-	38.91	10.72	35.55
AV	11.4548G	53.12	54.00	-0.88	39.04	3	Horizontal	144	1.80	-	38.91	10.72	35.55
PK	17.15856G	63.83	68.20	-4.37	44.07	3	Horizontal	149	1.67	-	40.43	14.21	34.88

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

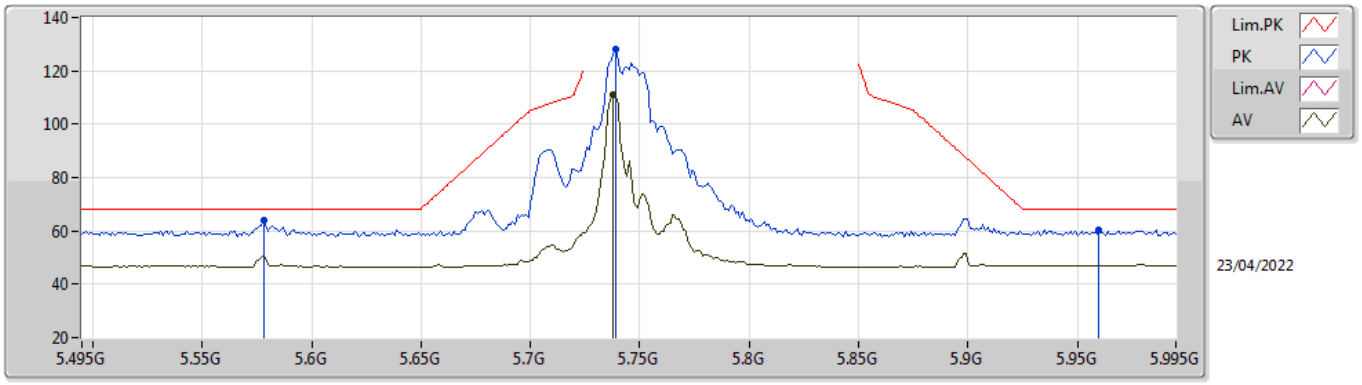


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.578G	63.87	68.20	-4.33	57.28	3	Vertical	78	1.82	-	34.60	7.38	35.39
PK	5.739G	128.21	Inf	-Inf	122.06	3	Vertical	78	1.82	-	34.22	7.40	35.47
AV	5.738G	111.20	Inf	-Inf	105.05	3	Vertical	78	1.82	-	34.22	7.40	35.47
PK	5.96G	60.41	68.20	-7.79	53.63	3	Vertical	78	1.82	-	34.80	7.56	35.58

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

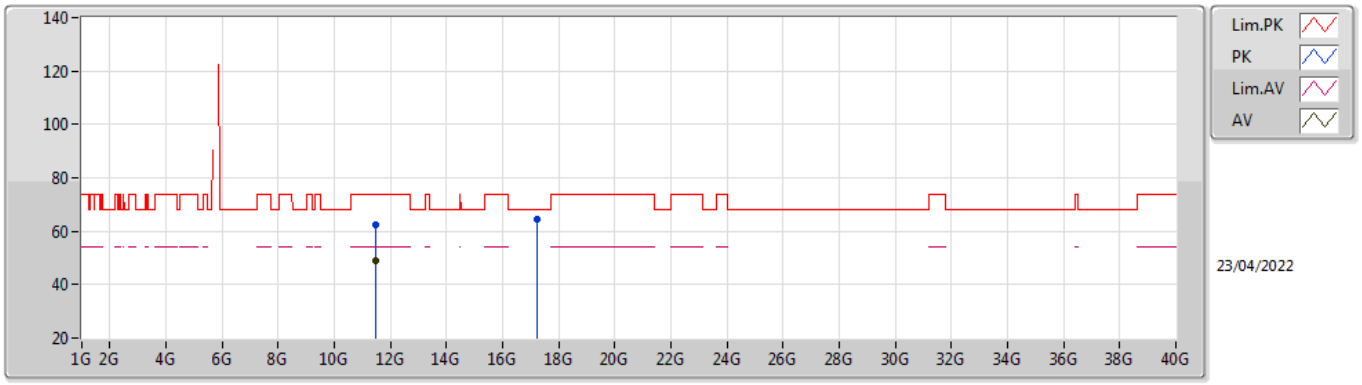


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.47848G	62.56	74.00	-11.44	48.46	3	Vertical	203	1.66	-	38.96	10.72	35.58
AV	11.47608G	48.80	54.00	-5.20	34.70	3	Vertical	203	1.66	-	38.95	10.72	35.57
PK	17.229G	64.44	68.20	-3.76	44.29	3	Vertical	110	2.22	-	40.77	14.26	34.88

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

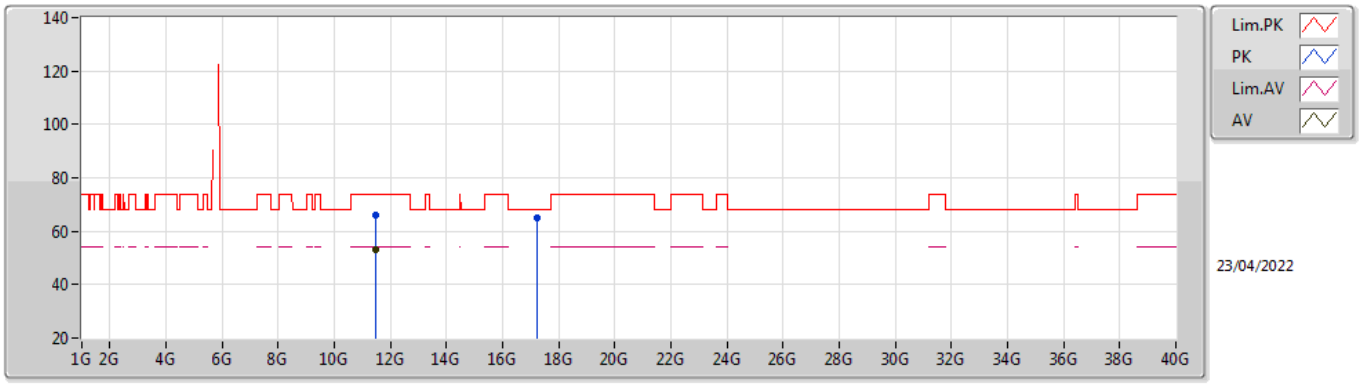


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.47472G	66.19	74.00	-7.81	52.09	3	Horizontal	142	1.80	-	38.95	10.72	35.57
AV	11.47464G	52.90	54.00	-1.10	38.80	3	Horizontal	142	1.80	-	38.95	10.72	35.57
PK	17.23972G	64.83	68.20	-3.37	44.60	3	Horizontal	33	1.66	-	40.84	14.27	34.88

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

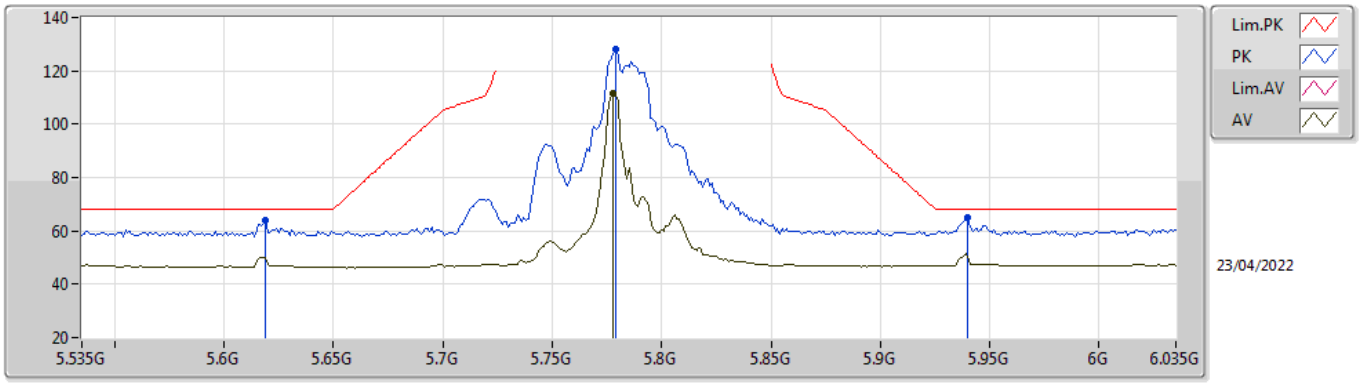


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.619G	64.06	68.20	-4.14	57.51	3	Vertical	77	1.83	-	34.56	7.40	35.41
PK	5.779G	128.29	Inf	-Inf	122.18	3	Vertical	77	1.83	-	34.20	7.40	35.49
AV	5.778G	111.40	Inf	-Inf	105.29	3	Vertical	77	1.83	-	34.20	7.40	35.49
PK	5.94G	64.86	68.20	-3.34	58.13	3	Vertical	77	1.83	-	34.76	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

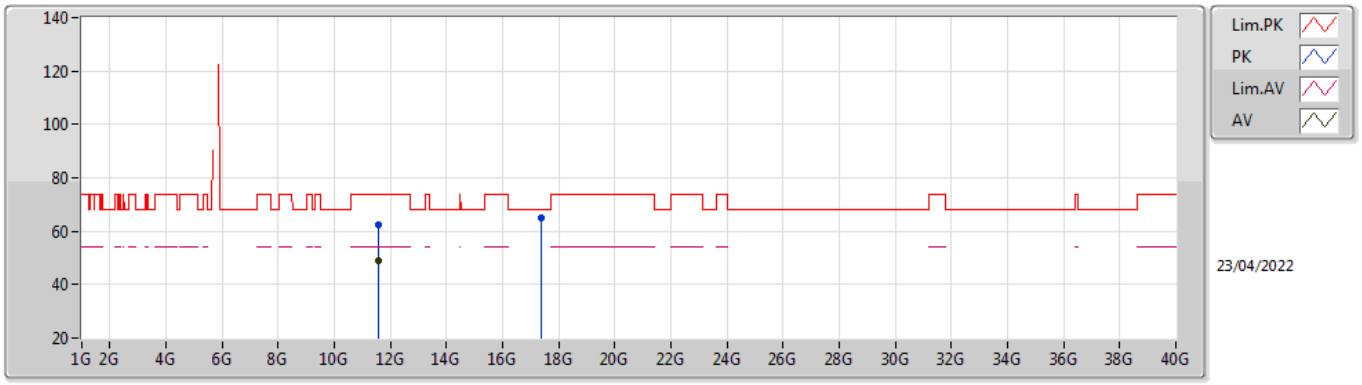


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.55592G	62.19	74.00	-11.81	47.83	3	Vertical	197	1.78	-	39.22	10.73	35.59
AV	11.55552G	49.20	54.00	-4.80	34.84	3	Vertical	197	1.78	-	39.22	10.73	35.59
PK	17.36108G	64.94	68.20	-3.26	44.05	3	Vertical	83	2.82	-	41.44	14.35	34.90

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

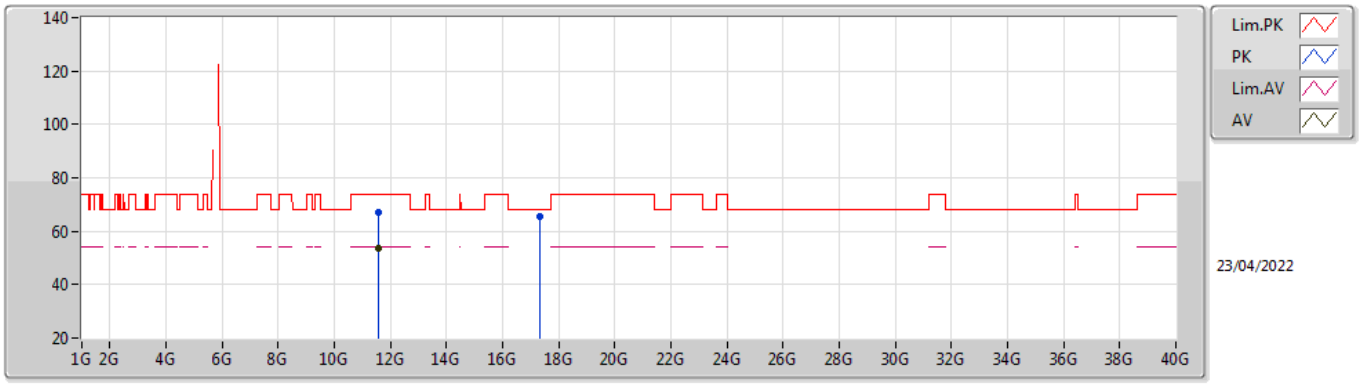


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.55736G	66.84	74.00	-7.16	52.47	3	Horizontal	144	1.70	-	39.23	10.73	35.59
AV	11.55464G	53.63	54.00	-0.37	39.27	3	Horizontal	144	1.70	-	39.22	10.73	35.59
PK	17.33996G	65.29	68.20	-2.91	44.48	3	Horizontal	67	1.42	-	41.36	14.34	34.89

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

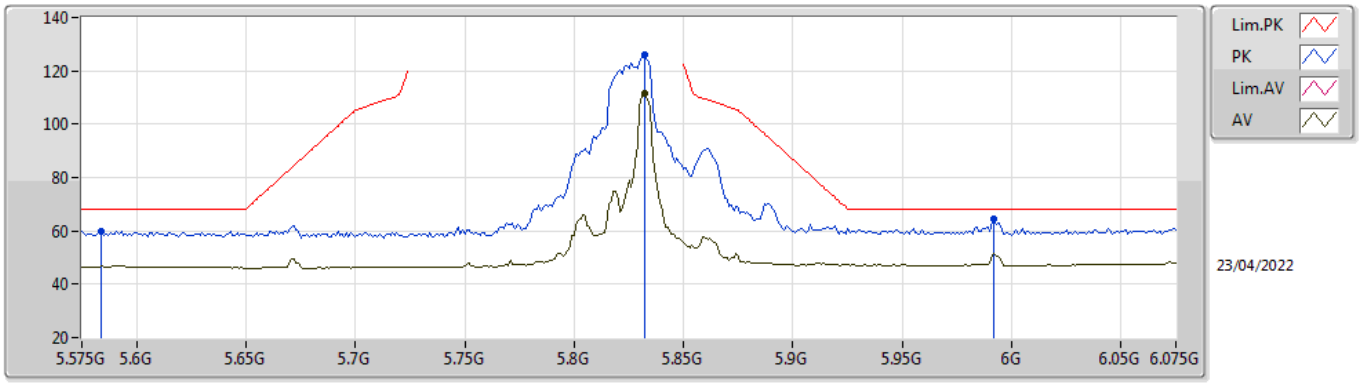


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.584G	60.08	68.20	-8.12	53.49	3	Vertical	76	1.89	-	34.60	7.38	35.39
PK	5.832G	125.95	Inf	-Inf	119.78	3	Vertical	76	1.89	-	34.26	7.43	35.52
AV	5.832G	111.52	Inf	-Inf	105.35	3	Vertical	76	1.89	-	34.26	7.43	35.52
PK	5.992G	64.43	68.20	-3.77	57.64	3	Vertical	76	1.89	-	34.80	7.59	35.60

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

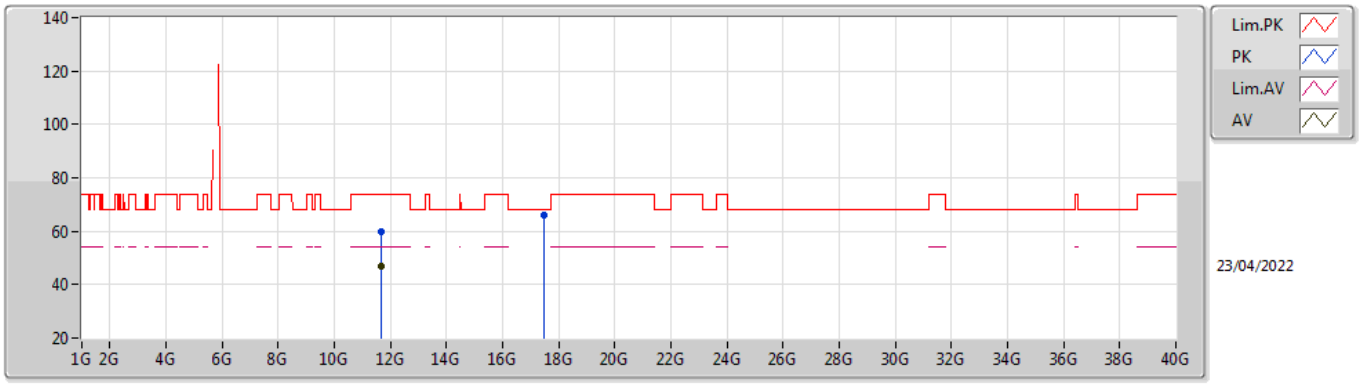


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.66552G	60.08	74.00	-13.92	45.49	3	Vertical	200	2.02	-	39.40	10.75	35.56
AV	11.6652G	47.14	54.00	-6.86	32.55	3	Vertical	200	2.02	-	39.40	10.75	35.56
PK	17.48836G	66.09	68.20	-2.11	44.16	3	Vertical	34	1.79	-	42.40	14.44	34.91

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

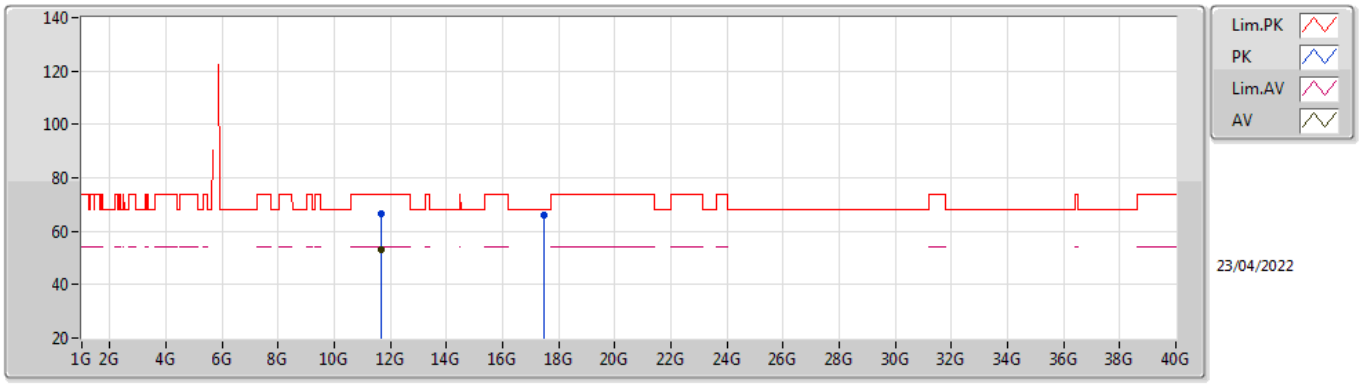

EUT Y_2TX
Setting 21.5
03-C-K-5


Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.66432G	66.76	74.00	-7.24	52.17	3	Horizontal	145	1.37	-	39.40	10.75	35.56
AV	11.66464G	53.28	54.00	-0.72	38.69	3	Horizontal	145	1.37	-	39.40	10.75	35.56
PK	17.4922G	66.18	68.20	-2.02	44.22	3	Horizontal	72	1.80	-	42.43	14.44	34.91

Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
5.47-5.725GHz	-	-	-	-	-	-	-	-	-	-	-
802.11ax HEW20_Nss1,(MCS0)_2TX	Pass	PK	5.725G	68.08	68.20	-0.12	3	Vertical	77	1.79	-

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

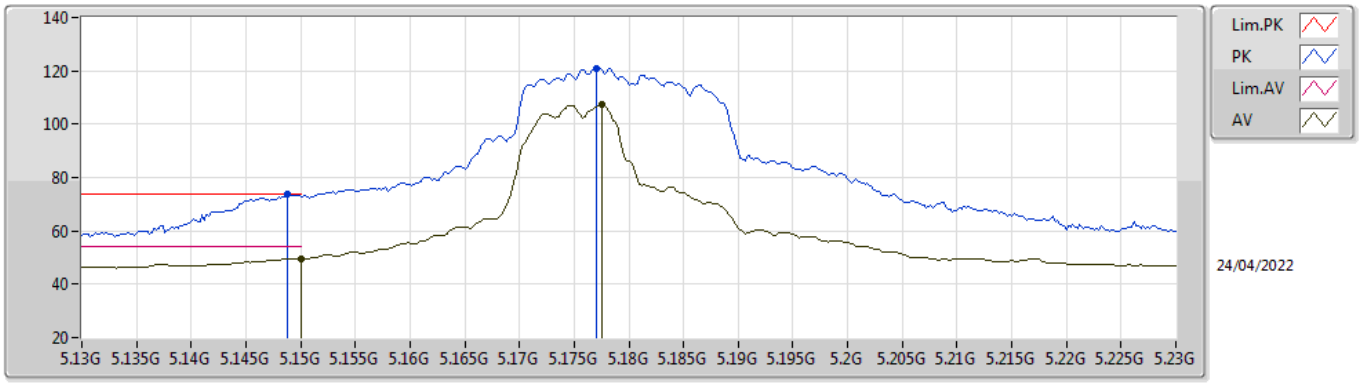


EUT Y_2TX
Setting 18
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1488G	73.77	74.00	-0.23	67.94	3	Vertical	73	1.92	-	34.00	7.17	35.34
AV	5.15G	49.61	54.00	-4.39	43.78	3	Vertical	73	1.92	-	34.00	7.17	35.34
PK	5.177G	120.95	Inf	-Inf	114.99	3	Vertical	73	1.92	-	34.11	7.19	35.34
AV	5.1776G	107.28	Inf	-Inf	101.32	3	Vertical	73	1.92	-	34.11	7.19	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

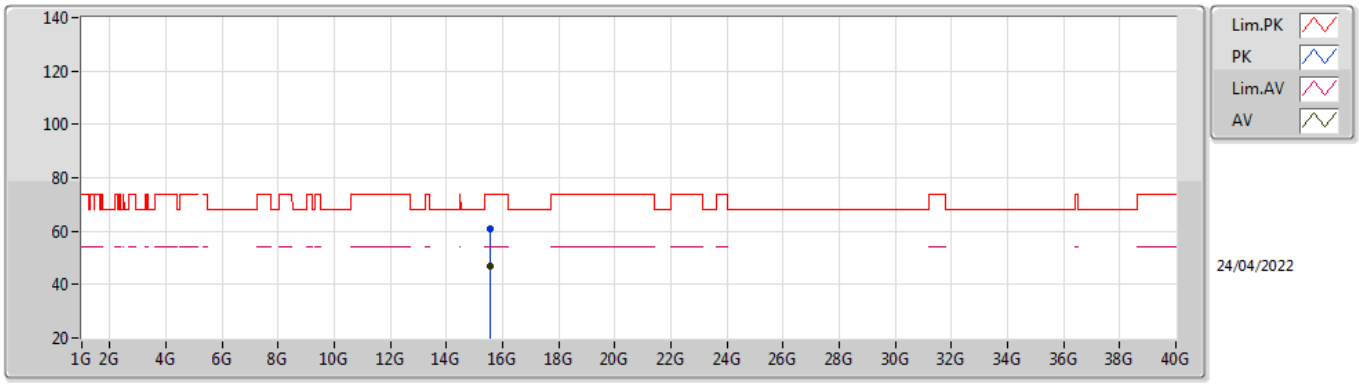


EUT Y_2TX
Setting 18
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.53862G	60.77	74.00	-13.23	44.57	3	Vertical	279	1.77	-	38.43	13.17	35.40
AV	15.535G	46.72	54.00	-7.28	30.49	3	Vertical	279	1.77	-	38.46	13.17	35.40

802.11ax HEW20_Nss1,(MCS0)_2TX

5180MHz_TnomVnom

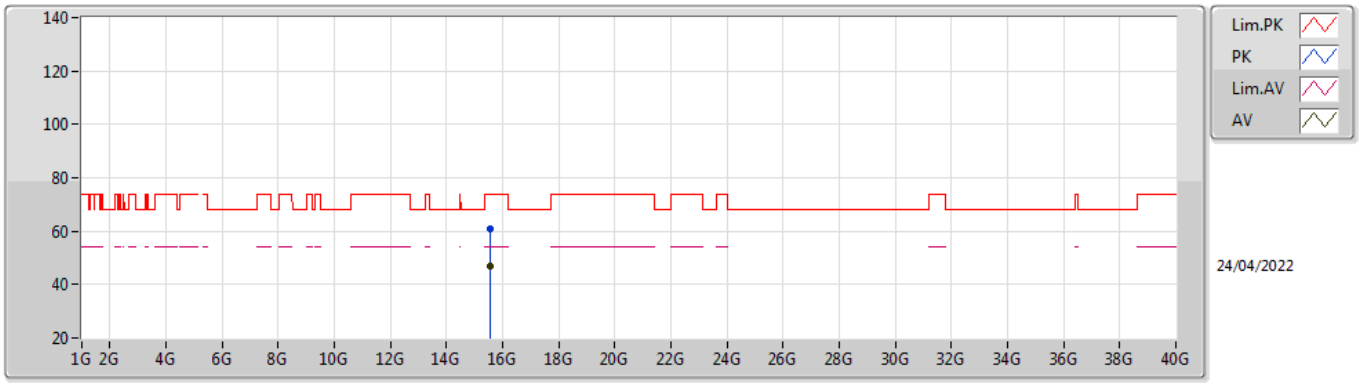


EUT Y_2TX
Setting 18
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.53706G	60.96	74.00	-13.04	44.75	3	Horizontal	139	1.29	-	38.44	13.17	35.40
AV	15.53734G	46.73	54.00	-7.27	30.52	3	Horizontal	139	1.29	-	38.44	13.17	35.40

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

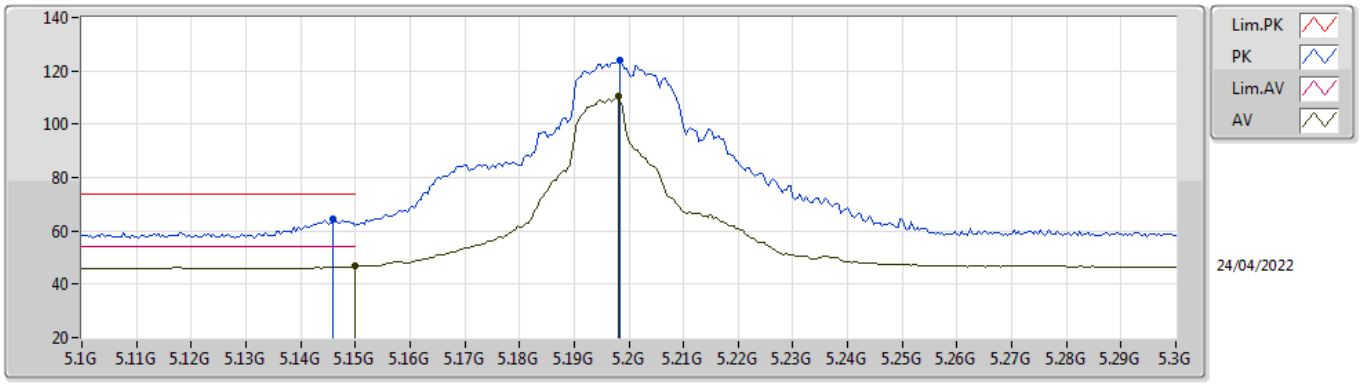


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.146G	64.26	74.00	-9.74	58.44	3	Vertical	73	1.96	-	33.99	7.17	35.34
AV	5.15G	46.66	54.00	-7.34	40.83	3	Vertical	73	1.96	-	34.00	7.17	35.34
PK	5.1984G	123.75	Inf	-Inf	117.70	3	Vertical	73	1.96	-	34.19	7.20	35.34
AV	5.198G	110.44	Inf	-Inf	104.39	3	Vertical	73	1.96	-	34.19	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

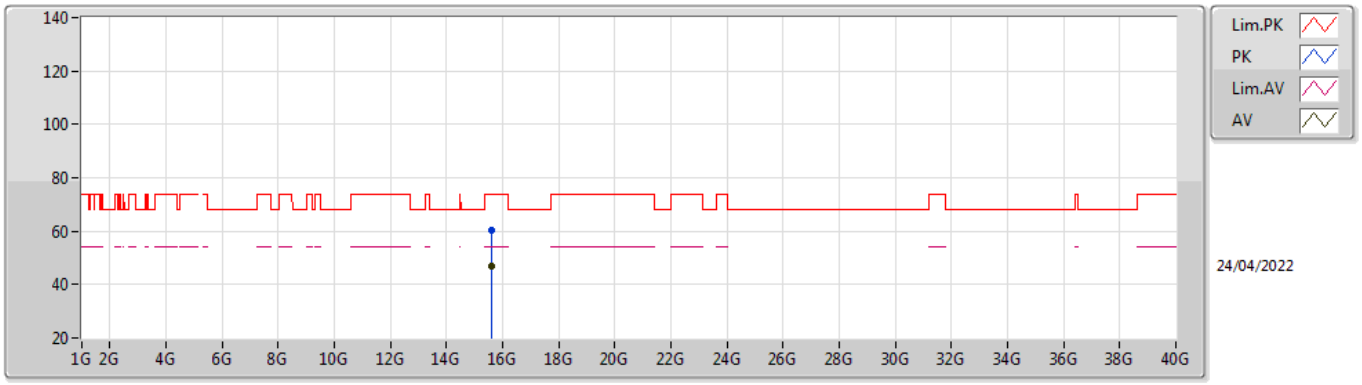


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.59696G	60.33	74.00	-13.67	44.56	3	Vertical	126	2.20	-	38.02	13.20	35.45
AV	15.59828G	47.05	54.00	-6.95	31.29	3	Vertical	126	2.20	-	38.01	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_2TX

5200MHz_TnomVnom

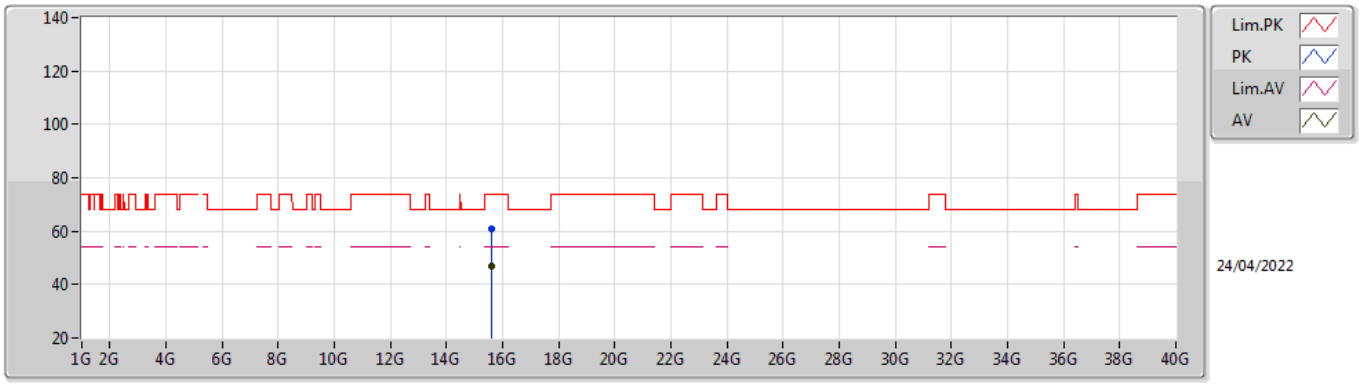


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.5984G	60.82	74.00	-13.18	45.06	3	Horizontal	32	1.95	-	38.01	13.20	35.45
AV	15.59814G	47.02	54.00	-6.98	31.26	3	Horizontal	32	1.95	-	38.01	13.20	35.45

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

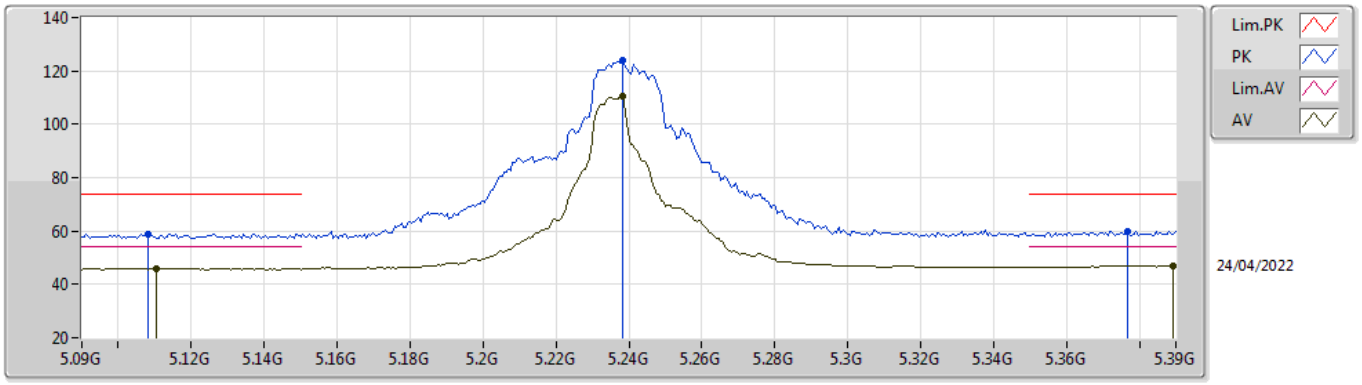


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.108G	59.04	74.00	-14.96	53.30	3	Vertical	77	1.96	-	33.92	7.15	35.33
AV	5.1104G	45.80	54.00	-8.20	40.05	3	Vertical	77	1.96	-	33.92	7.16	35.33
PK	5.2382G	124.02	Inf	-Inf	117.81	3	Vertical	77	1.96	-	34.35	7.20	35.34
AV	5.2382G	110.71	Inf	-Inf	104.50	3	Vertical	77	1.96	-	34.35	7.20	35.34
PK	5.3768G	59.89	74.00	-14.11	53.49	3	Vertical	77	1.96	-	34.55	7.20	35.35
AV	5.3894G	46.82	54.00	-7.18	40.39	3	Vertical	77	1.96	-	34.58	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

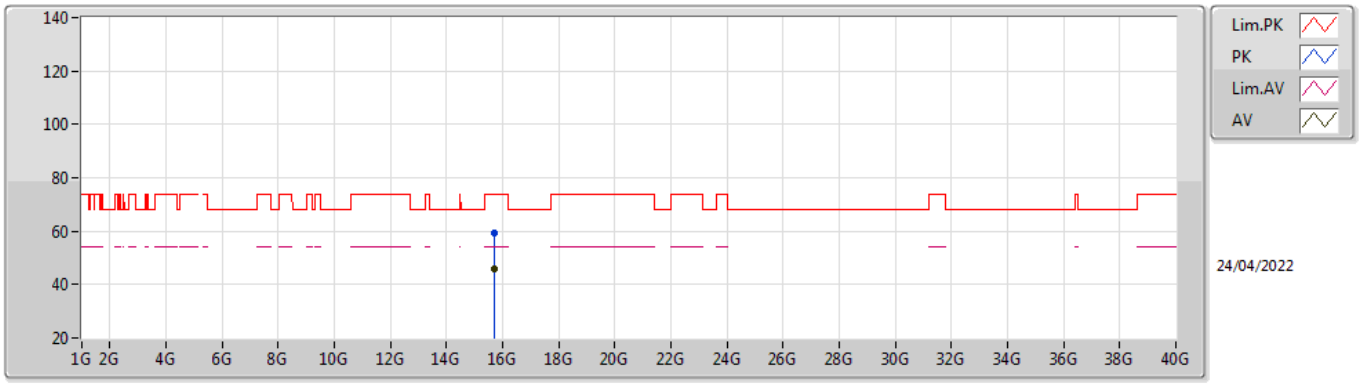


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.7215G	59.47	74.00	-14.53	44.18	3	Vertical	359	2.68	-	37.59	13.26	35.56
AV	15.72034G	46.02	54.00	-7.98	30.74	3	Vertical	359	2.68	-	37.58	13.26	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5240MHz_TnomVnom

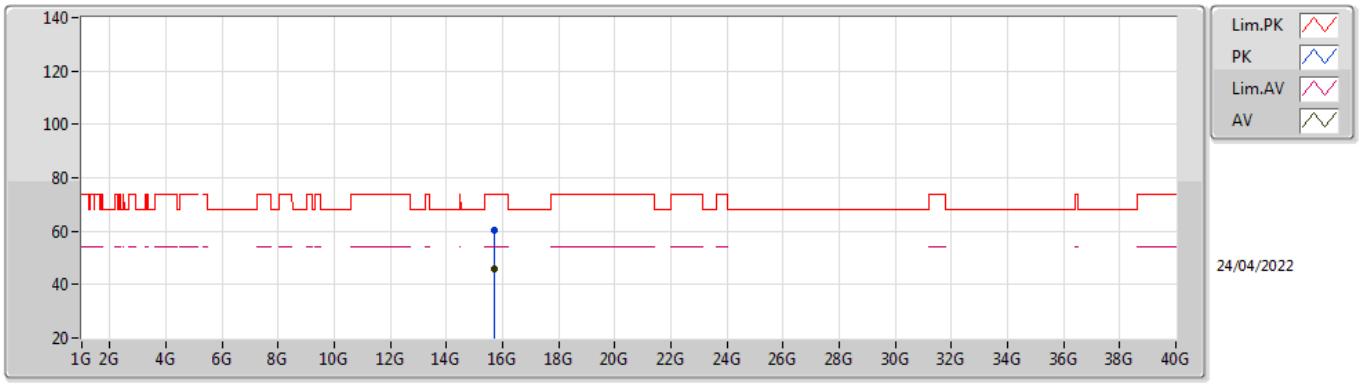


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.71524G	60.30	74.00	-13.70	45.03	3	Horizontal	9	1.53	-	37.56	13.26	35.55
AV	15.724G	46.11	54.00	-7.89	30.81	3	Horizontal	9	1.53	-	37.60	13.26	35.56

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

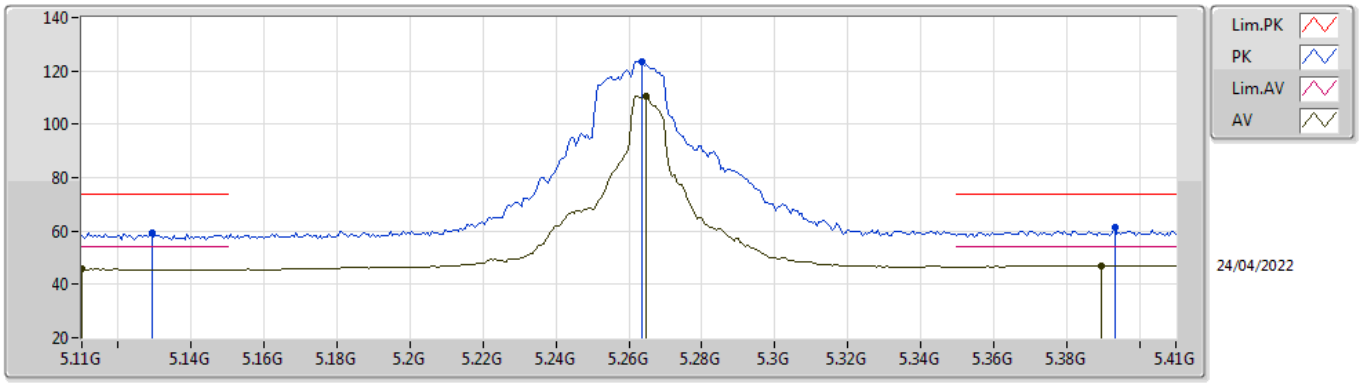


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.1292G	59.35	74.00	-14.65	53.57	3	Vertical	74	1.92	-	33.96	7.16	35.34
AV	5.11G	45.66	54.00	-8.34	39.91	3	Vertical	74	1.92	-	33.92	7.16	35.33
PK	5.2636G	123.35	Inf	-Inf	117.06	3	Vertical	74	1.92	-	34.43	7.20	35.34
AV	5.2648G	110.74	Inf	-Inf	104.45	3	Vertical	74	1.92	-	34.43	7.20	35.34
PK	5.3932G	61.23	74.00	-12.77	54.79	3	Vertical	74	1.92	-	34.59	7.20	35.35
AV	5.3896G	46.91	54.00	-7.09	40.48	3	Vertical	74	1.92	-	34.58	7.20	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

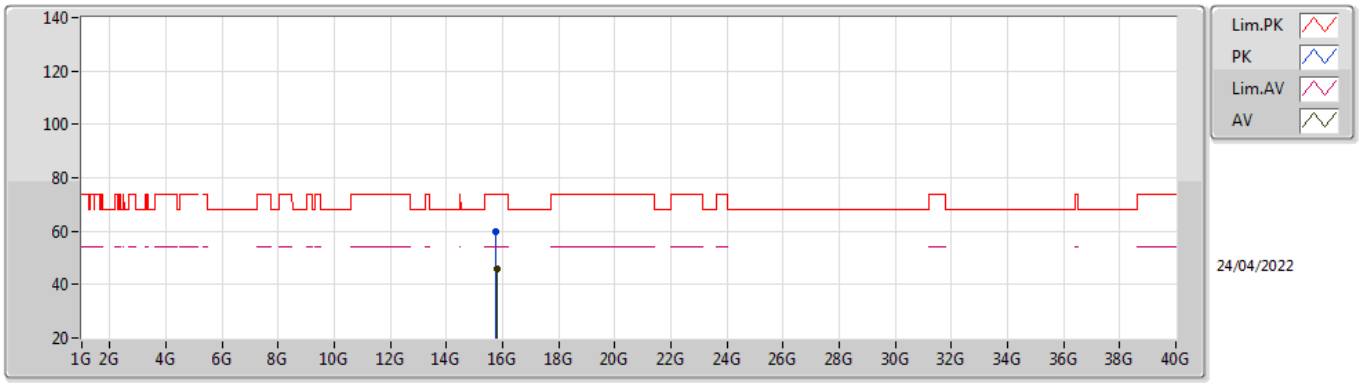


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.77524G	59.92	74.00	-14.08	44.43	3	Vertical	43	1.77	-	37.80	13.29	35.60
AV	15.78456G	45.75	54.00	-8.25	30.23	3	Vertical	43	1.77	-	37.84	13.29	35.61

802.11ax HEW20_Nss1,(MCS0)_2TX

5260MHz_TnomVnom

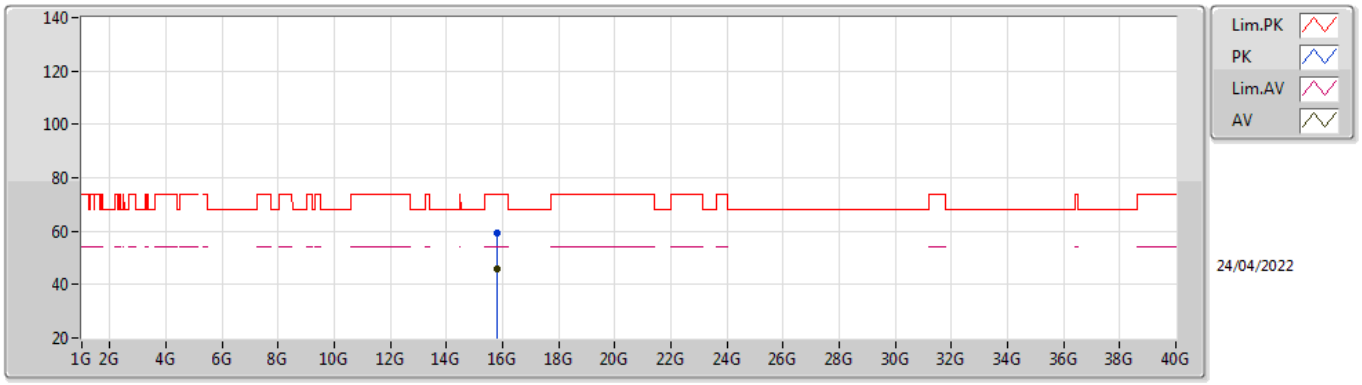


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.78286G	59.54	74.00	-14.46	44.03	3	Horizontal	151	2.17	-	37.83	13.29	35.61
AV	15.78172G	45.78	54.00	-8.22	30.27	3	Horizontal	151	2.17	-	37.83	13.29	35.61

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

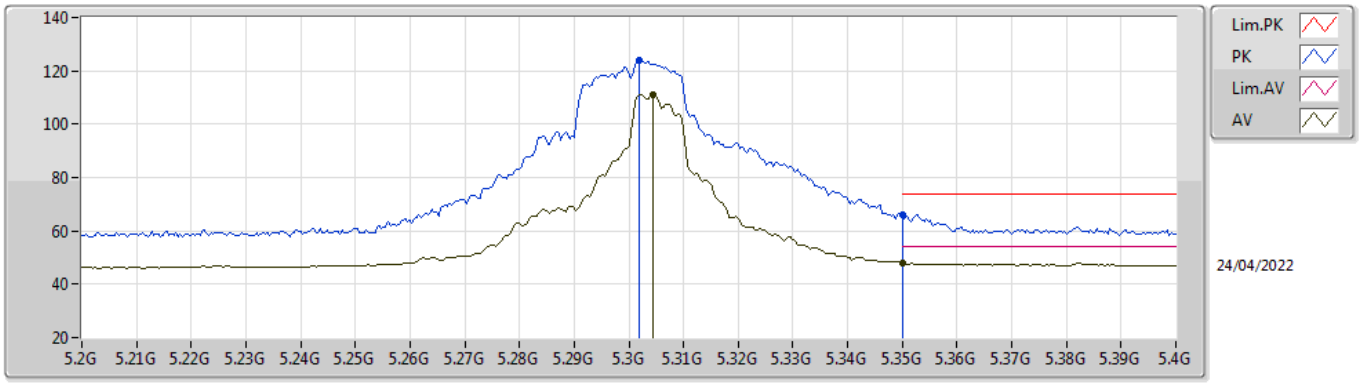


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.302G	123.74	Inf	-Inf	117.38	3	Vertical	75	1.94	-	34.50	7.20	35.34
AV	5.3044G	111.14	Inf	-Inf	104.78	3	Vertical	75	1.94	-	34.50	7.20	35.34
PK	5.35G	66.12	74.00	-7.88	59.76	3	Vertical	75	1.94	-	34.50	7.20	35.34
AV	5.35G	48.12	54.00	-5.88	41.76	3	Vertical	75	1.94	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

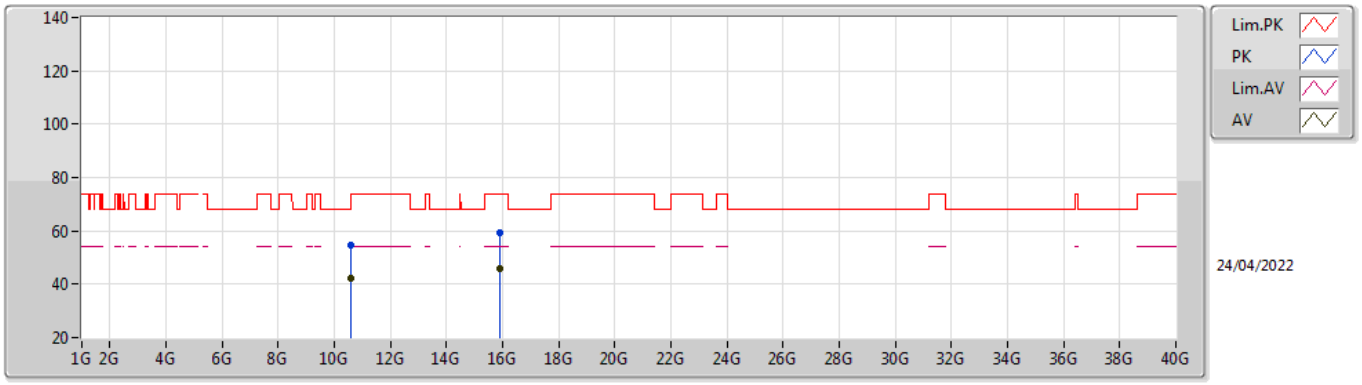


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.61352G	54.88	74.00	-19.12	41.43	3	Vertical	67	1.33	-	38.23	10.59	35.37
AV	10.60848G	42.33	54.00	-11.67	28.90	3	Vertical	67	1.33	-	38.22	10.59	35.38
PK	15.88576G	59.51	74.00	-14.49	44.22	3	Vertical	24	1.94	-	37.64	13.34	35.69
AV	15.91096G	46.02	54.00	-7.98	30.80	3	Vertical	24	1.94	-	37.58	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_2TX

5300MHz_TnomVnom

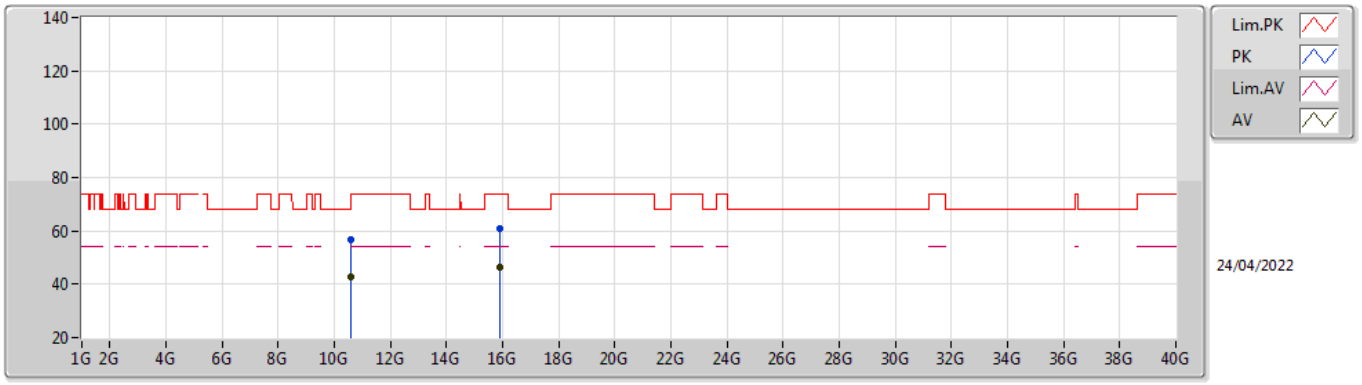


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.6088G	56.55	74.00	-17.45	43.12	3	Horizontal	115	1.80	-	38.22	10.59	35.38
AV	10.60904G	42.73	54.00	-11.27	29.30	3	Horizontal	115	1.80	-	38.22	10.59	35.38
PK	15.91464G	60.69	74.00	-13.31	45.48	3	Horizontal	176	1.56	-	37.57	13.36	35.72
AV	15.9108G	46.51	54.00	-7.49	31.29	3	Horizontal	176	1.56	-	37.58	13.36	35.72

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

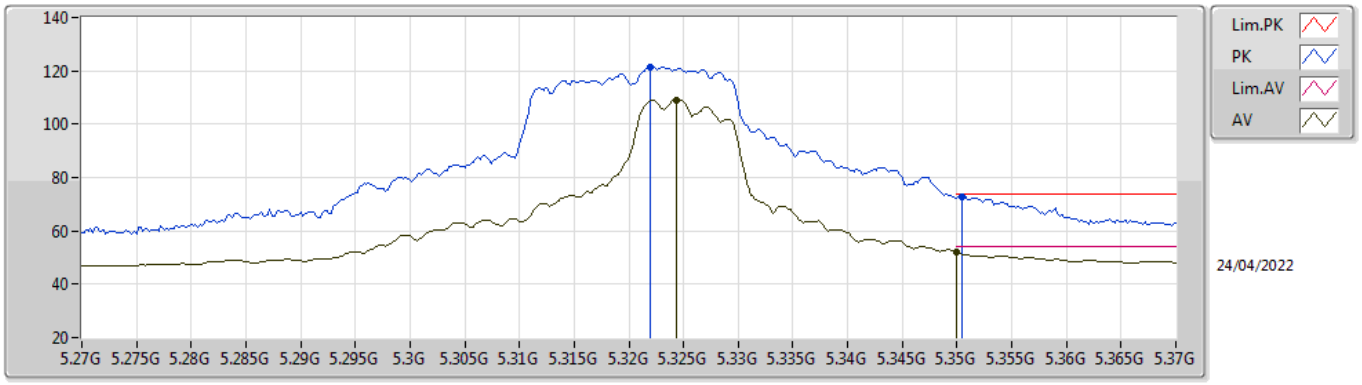


EUT Y_2TX
Setting 18
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.322G	121.33	Inf	-Inf	114.97	3	Vertical	75	1.90	-	34.50	7.20	35.34
AV	5.3244G	109.19	Inf	-Inf	102.83	3	Vertical	75	1.90	-	34.50	7.20	35.34
PK	5.3504G	72.67	74.00	-1.33	66.31	3	Vertical	75	1.90	-	34.50	7.20	35.34
AV	5.35G	52.18	54.00	-1.82	45.82	3	Vertical	75	1.90	-	34.50	7.20	35.34

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

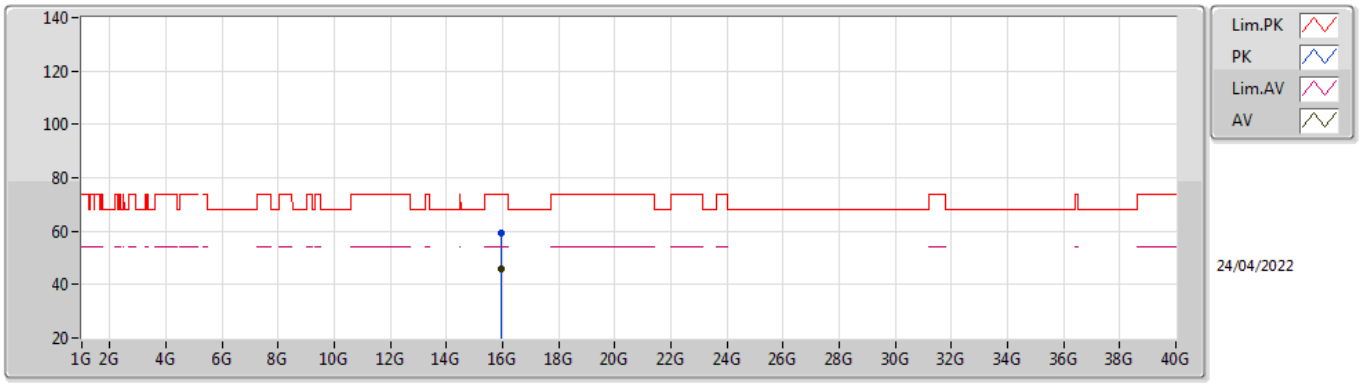


EUT Y_2TX
Setting 18
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.96118G	59.44	74.00	-14.56	44.34	3	Vertical	222	1.26	-	37.48	13.38	35.76
AV	15.95798G	45.69	54.00	-8.31	30.58	3	Vertical	222	1.26	-	37.48	13.38	35.75

802.11ax HEW20_Nss1,(MCS0)_2TX

5320MHz_TnomVnom

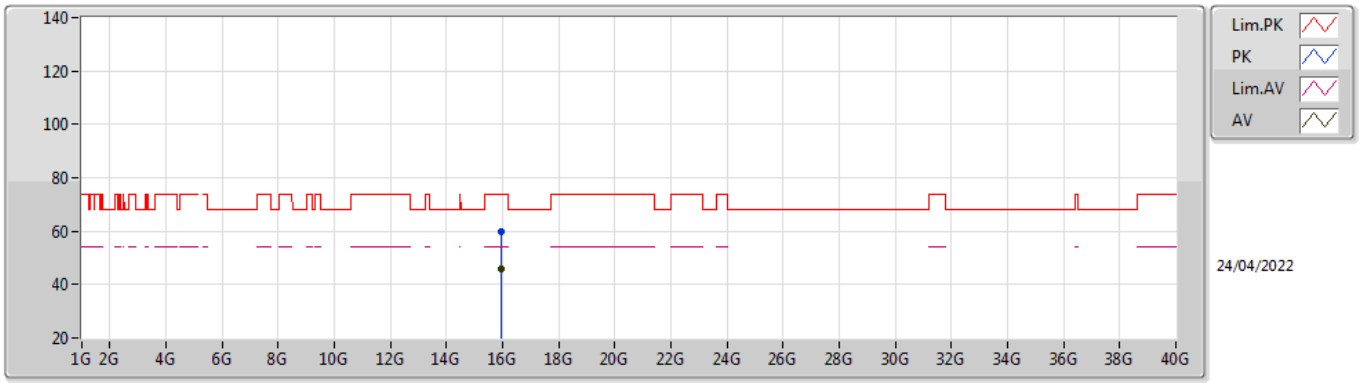


EUT Y_2TX
Setting 18
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	15.96104G	59.61	74.00	-14.39	44.51	3	Horizontal	140	1.86	-	37.48	13.38	35.76
AV	15.95524G	45.70	54.00	-8.30	30.58	3	Horizontal	140	1.86	-	37.49	13.38	35.75

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

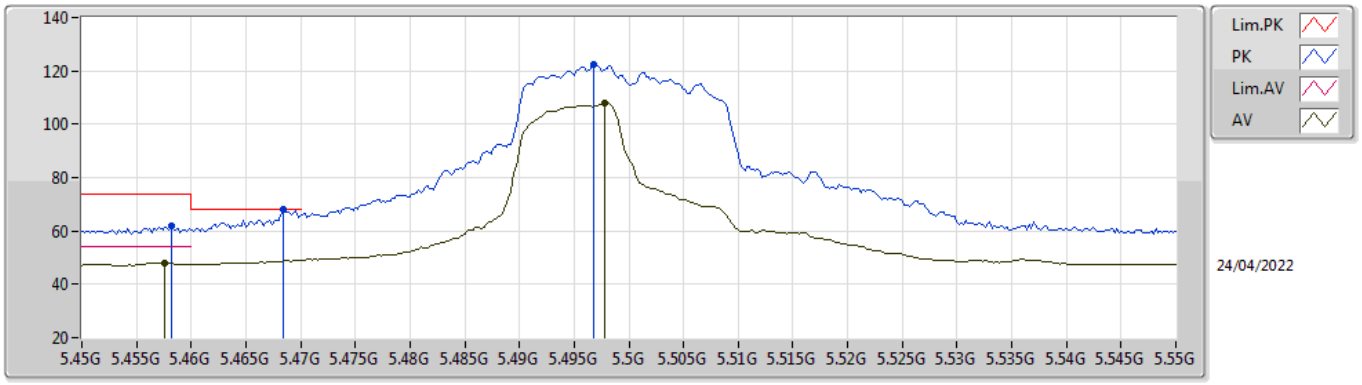


EUT Y_2TX
Setting 16.75
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.4582G	61.71	74.00	-12.29	55.28	3	Vertical	74	1.87	-	34.52	7.26	35.35
AV	5.4576G	48.15	54.00	-5.85	41.72	3	Vertical	74	1.87	-	34.52	7.26	35.35
PK	5.4684G	67.96	68.20	-0.24	61.50	3	Vertical	74	1.87	-	34.54	7.27	35.35
PK	5.4968G	122.32	Inf	-Inf	115.78	3	Vertical	74	1.87	-	34.59	7.30	35.35
AV	5.4978G	108.10	Inf	-Inf	101.55	3	Vertical	74	1.87	-	34.60	7.30	35.35

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

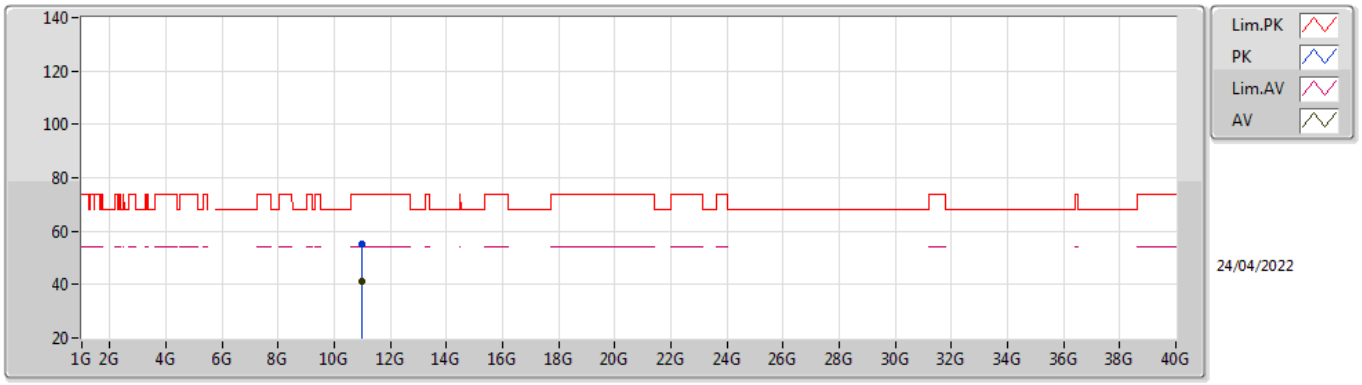


EUT Y_2TX
Setting 16.75
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.00216G	55.31	74.00	-18.69	41.30	3	Vertical	78	2.16	-	38.40	10.65	35.04
AV	11.00328G	41.46	54.00	-12.54	27.45	3	Vertical	78	2.16	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_2TX

5500MHz_TnomVnom

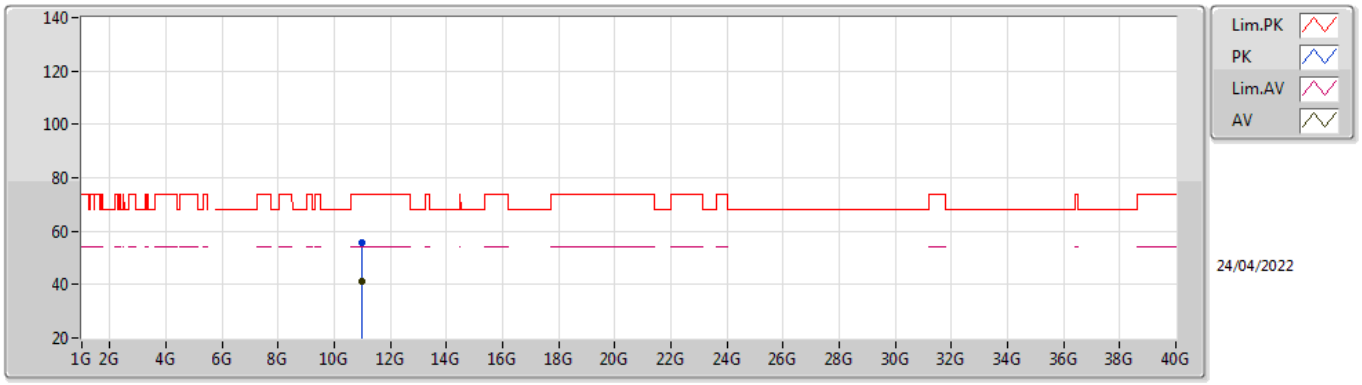


EUT Y_2TX
Setting 16.75
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	10.99878G	55.82	74.00	-18.18	41.81	3	Horizontal	43	2.68	-	38.40	10.65	35.04
AV	11.00366G	41.42	54.00	-12.58	27.41	3	Horizontal	43	2.68	-	38.40	10.65	35.04

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

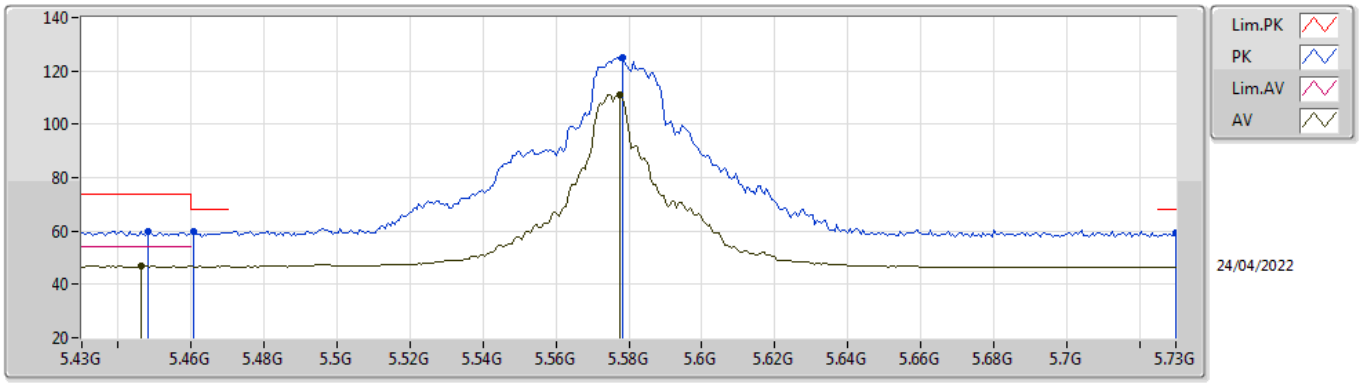


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.448G	59.94	74.00	-14.06	53.54	3	Vertical	77	1.80	-	34.50	7.25	35.35
AV	5.4462G	46.73	54.00	-7.27	40.32	3	Vertical	77	1.80	-	34.51	7.25	35.35
PK	5.4606G	59.73	68.20	-8.47	53.30	3	Vertical	77	1.80	-	34.52	7.26	35.35
PK	5.5782G	125.15	Inf	-Inf	118.56	3	Vertical	77	1.80	-	34.60	7.38	35.39
AV	5.5776G	111.23	Inf	-Inf	104.64	3	Vertical	77	1.80	-	34.60	7.38	35.39
PK	5.73G	59.50	68.20	-8.70	53.33	3	Vertical	77	1.80	-	34.24	7.40	35.47

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

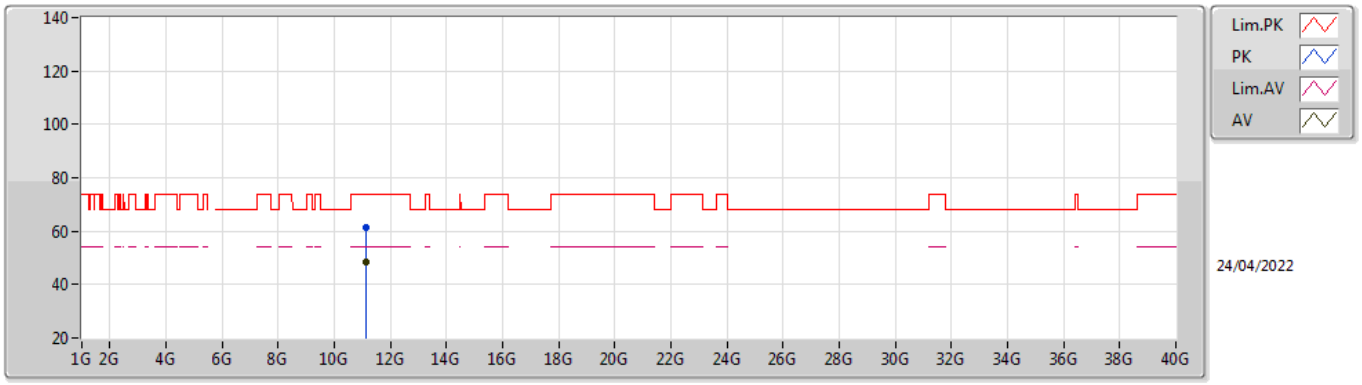


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.15056G	61.24	74.00	-12.76	47.23	3	Vertical	185	1.93	-	38.55	10.67	35.21
AV	11.15096G	48.38	54.00	-5.62	34.37	3	Vertical	185	1.93	-	38.55	10.67	35.21

802.11ax HEW20_Nss1,(MCS0)_2TX

5580MHz_TnomVnom

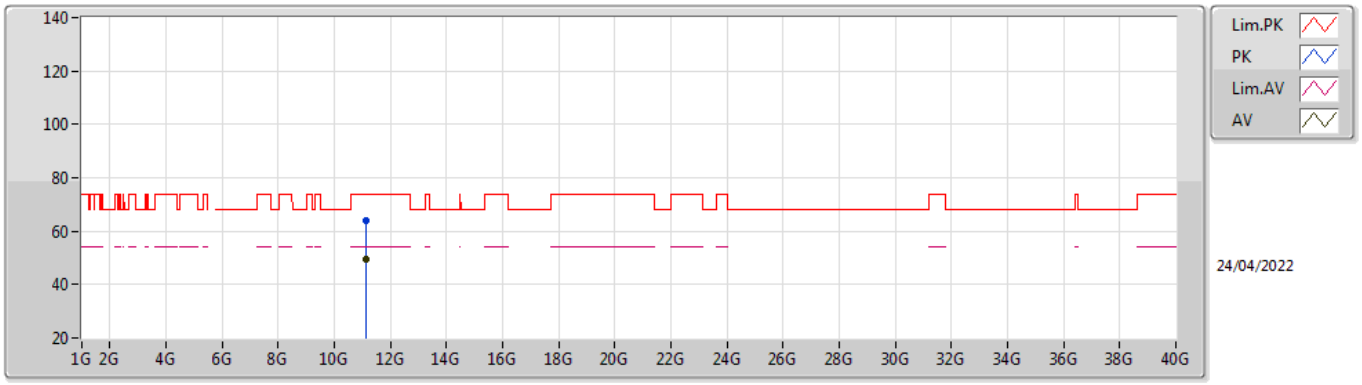


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.14944G	63.79	74.00	-10.21	49.78	3	Horizontal	144	1.60	-	38.55	10.67	35.21
AV	11.15432G	49.55	54.00	-4.45	35.54	3	Horizontal	144	1.60	-	38.55	10.67	35.21

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

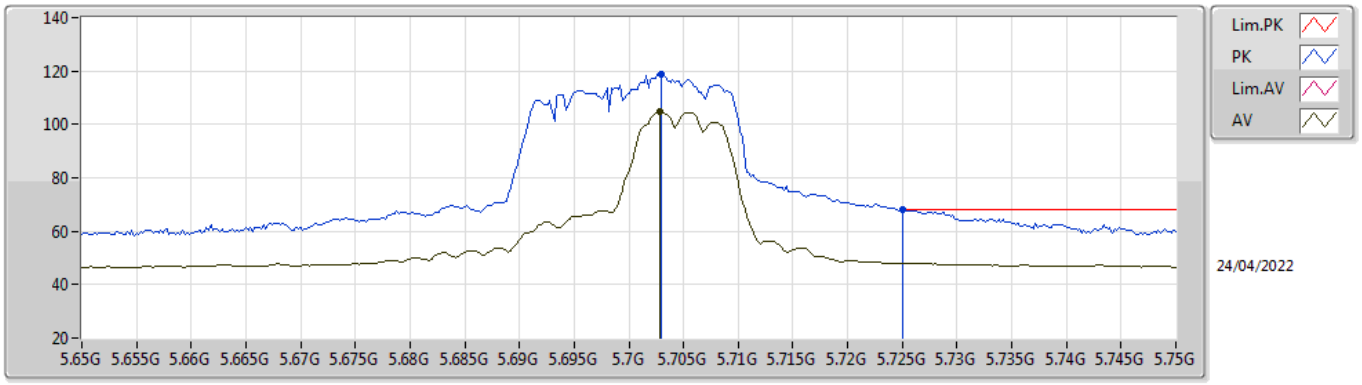


EUT Y_2TX
Setting 13
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.703G	118.76	Inf	-Inf	112.52	3	Vertical	77	1.79	-	34.29	7.40	35.45
AV	5.7028G	104.72	Inf	-Inf	98.48	3	Vertical	77	1.79	-	34.29	7.40	35.45
PK	5.725G	68.08	68.20	-0.12	61.89	3	Vertical	77	1.79	-	34.25	7.40	35.46

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

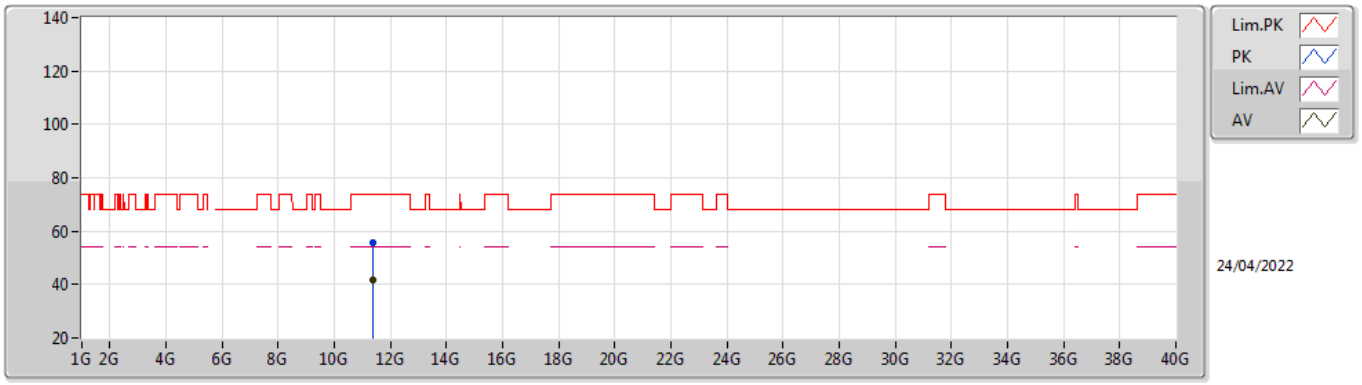


EUT Y_2TX
Setting 13
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.3982G	55.92	74.00	-18.08	41.90	3	Vertical	130	2.89	-	38.80	10.71	35.49
AV	11.39914G	41.84	54.00	-12.16	27.82	3	Vertical	130	2.89	-	38.80	10.71	35.49

802.11ax HEW20_Nss1,(MCS0)_2TX

5700MHz_TnomVnom

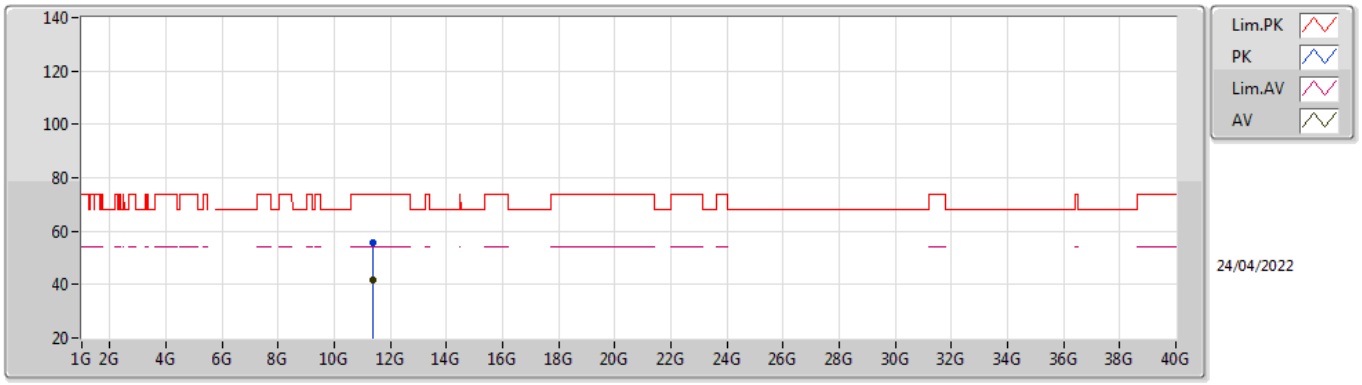


EUT Y_2TX
Setting 13
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.40002G	55.62	74.00	-18.38	41.60	3	Horizontal	149	1.20	-	38.80	10.71	35.49
AV	11.39574G	41.82	54.00	-12.18	27.79	3	Horizontal	149	1.20	-	38.80	10.71	35.48

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

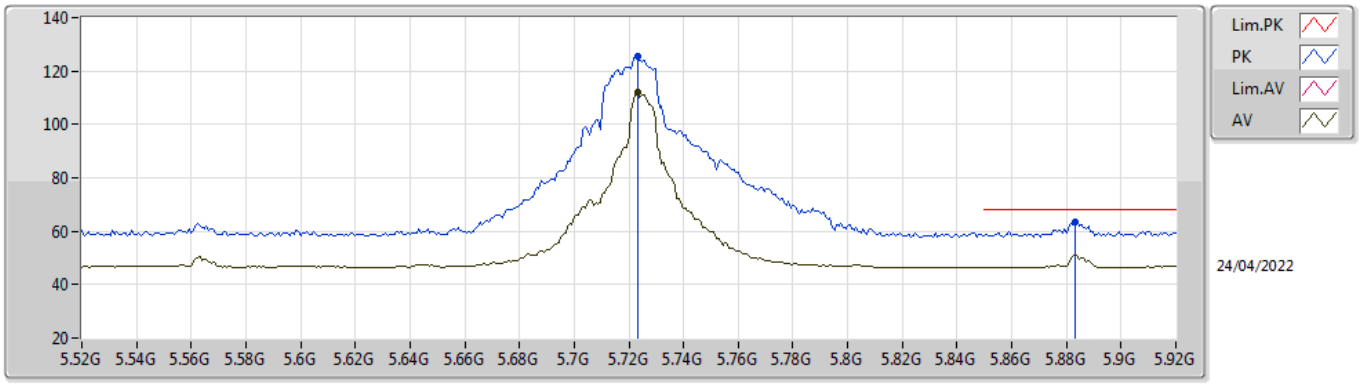


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.7232G	125.36	Inf	-Inf	119.17	3	Vertical	77	1.80	-	34.25	7.40	35.46
AV	5.7232G	111.84	Inf	-Inf	105.65	3	Vertical	77	1.80	-	34.25	7.40	35.46
PK	5.8832G	63.46	68.20	-4.74	57.02	3	Vertical	77	1.80	-	34.50	7.48	35.54

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

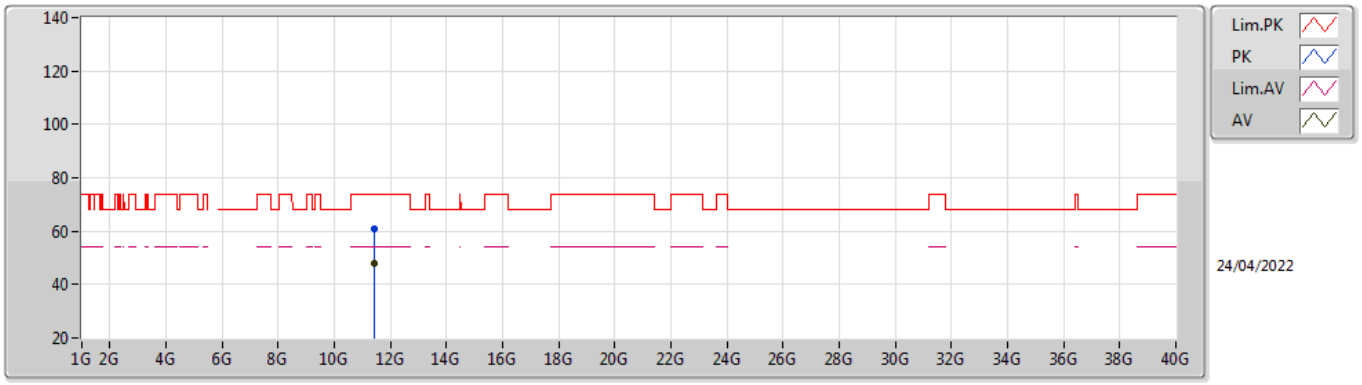


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.44136G	61.11	74.00	-12.89	47.04	3	Vertical	181	1.93	-	38.88	10.72	35.53
AV	11.4456G	47.80	54.00	-6.20	33.73	3	Vertical	181	1.93	-	38.89	10.72	35.54

802.11ax HEW20_Nss1,(MCS0)_2TX

5720MHz Straddle 5.47-5.725GHz_TnomVnom

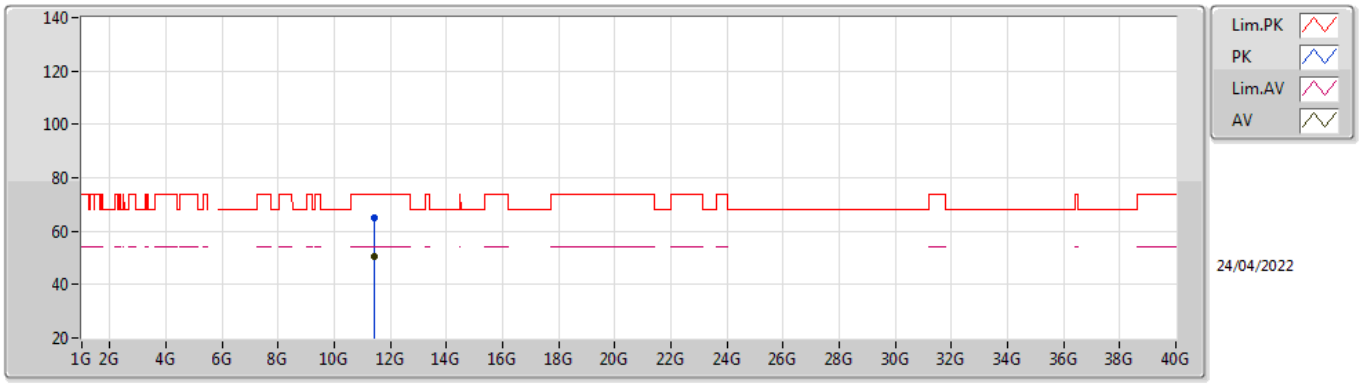


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.44488G	64.88	74.00	-9.12	50.81	3	Horizontal	147	1.80	-	38.89	10.72	35.54
AV	11.4496G	50.62	54.00	-3.38	36.54	3	Horizontal	147	1.80	-	38.90	10.72	35.54

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

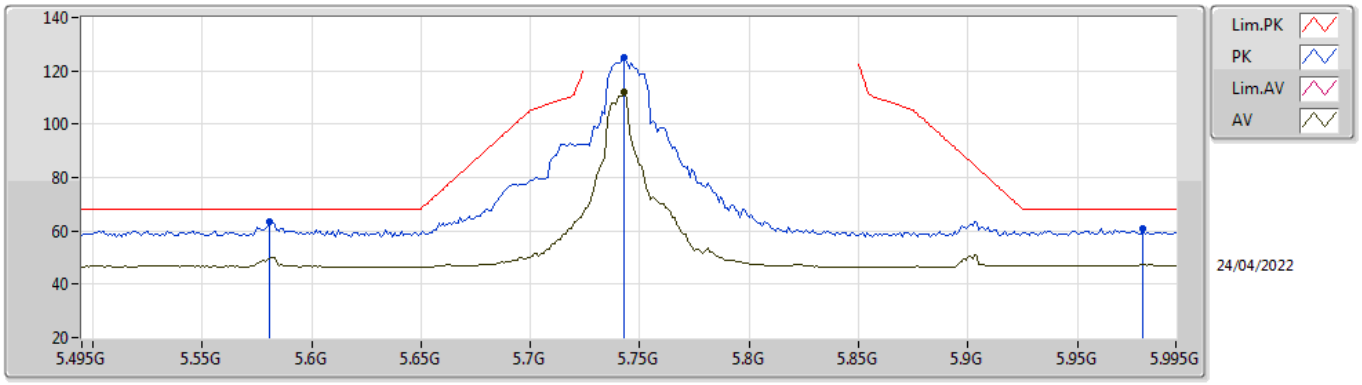


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.581G	63.40	68.20	-4.80	56.81	3	Vertical	79	1.80	-	34.60	7.38	35.39
PK	5.743G	124.98	Inf	-Inf	118.84	3	Vertical	79	1.80	-	34.21	7.40	35.47
AV	5.743G	111.95	Inf	-Inf	105.81	3	Vertical	79	1.80	-	34.21	7.40	35.47
PK	5.98G	61.11	68.20	-7.09	54.32	3	Vertical	79	1.80	-	34.80	7.58	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

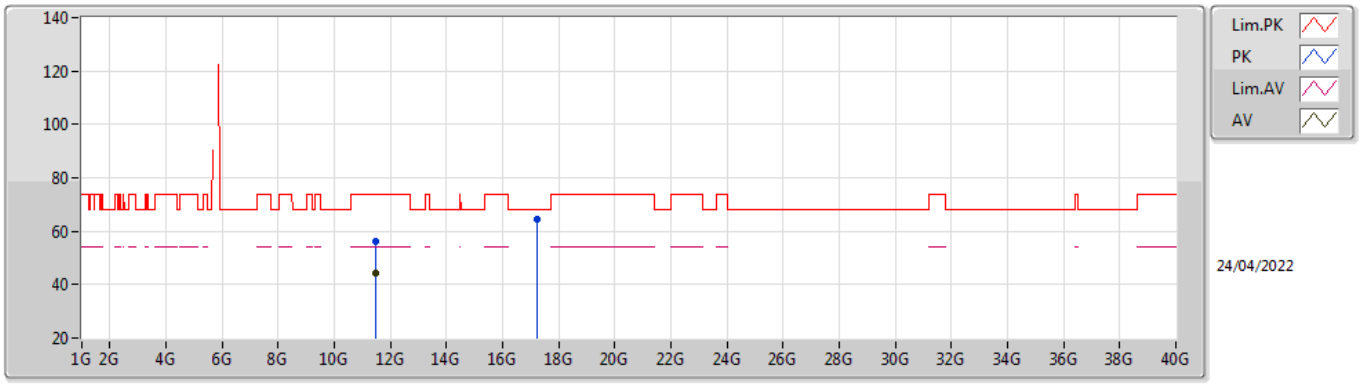


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.48728G	56.04	74.00	-17.96	41.94	3	Vertical	114	1.23	-	38.97	10.72	35.59
AV	11.4844G	44.14	54.00	-9.86	30.03	3	Vertical	114	1.23	-	38.97	10.72	35.58
PK	17.23244G	64.25	68.20	-3.95	44.08	3	Vertical	123	1.00	-	40.79	14.26	34.88

802.11ax HEW20_Nss1,(MCS0)_2TX

5745MHz_TnomVnom

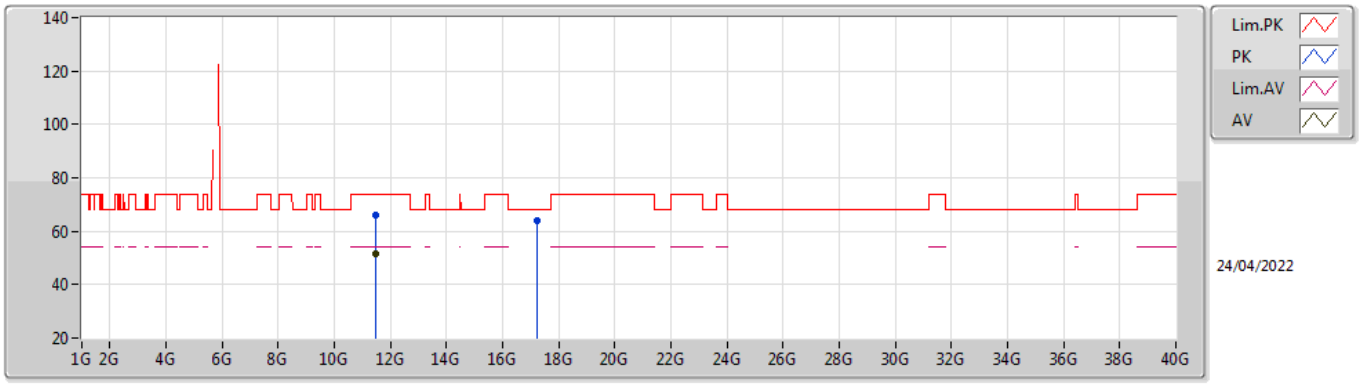


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.48896G	66.01	74.00	-7.99	51.90	3	Horizontal	142	1.80	-	38.98	10.72	35.59
AV	11.48448G	51.62	54.00	-2.38	37.51	3	Horizontal	142	1.80	-	38.97	10.72	35.58
PK	17.24836G	63.72	68.20	-4.48	43.44	3	Horizontal	176	1.32	-	40.89	14.27	34.88

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

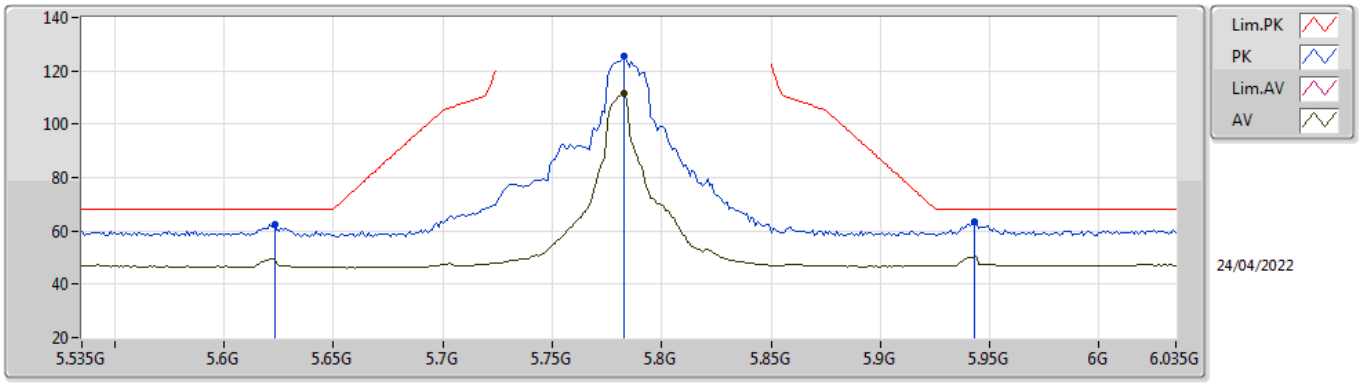


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.623G	62.55	68.20	-5.65	56.01	3	Vertical	78	1.80	-	34.55	7.40	35.41
PK	5.783G	125.53	Inf	-Inf	119.42	3	Vertical	78	1.80	-	34.20	7.40	35.49
AV	5.783G	111.60	Inf	-Inf	105.49	3	Vertical	78	1.80	-	34.20	7.40	35.49
PK	5.943G	63.64	68.20	-4.56	56.90	3	Vertical	78	1.80	-	34.77	7.54	35.57

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

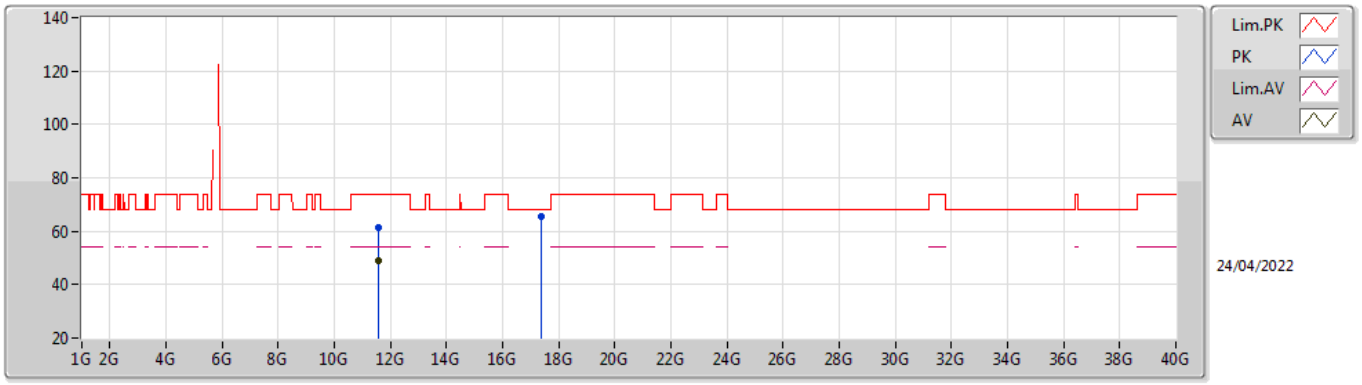


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.56544G	61.54	74.00	-12.46	47.14	3	Vertical	188	2.84	-	39.26	10.73	35.59
AV	11.56104G	49.05	54.00	-4.95	34.67	3	Vertical	188	2.84	-	39.24	10.73	35.59
PK	17.35684G	65.31	68.20	-2.89	44.43	3	Vertical	54	2.00	-	41.43	14.35	34.90

802.11ax HEW20_Nss1,(MCS0)_2TX

5785MHz_TnomVnom

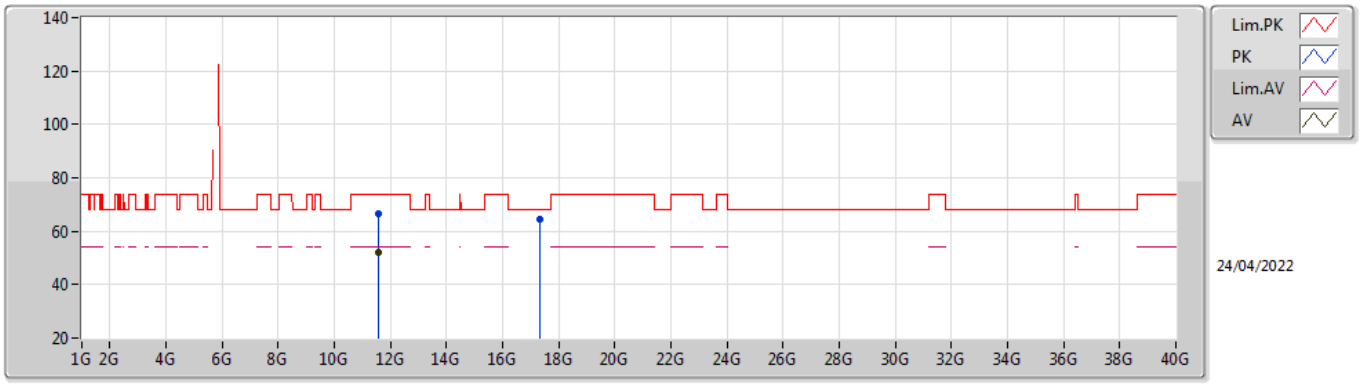


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.56904G	66.54	74.00	-7.46	52.10	3	Horizontal	144	1.75	-	39.28	10.74	35.58
AV	11.56432G	52.18	54.00	-1.82	37.78	3	Horizontal	144	1.75	-	39.26	10.73	35.59
PK	17.33732G	64.49	68.20	-3.71	43.69	3	Horizontal	333	1.80	-	41.35	14.34	34.89

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

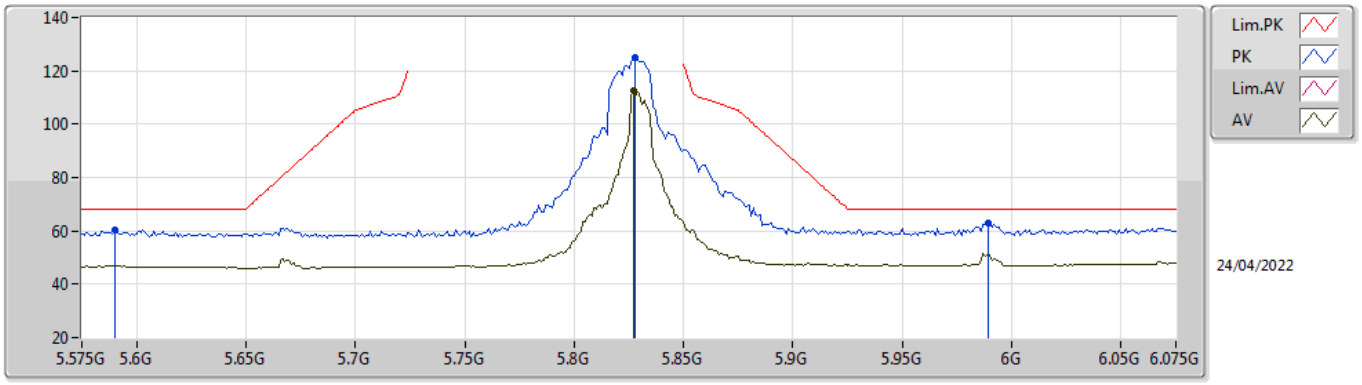


EUT Y_2TX
Setting 21.5
03-C-K-5-10

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	5.59G	60.54	68.20	-7.66	53.95	3	Vertical	76	1.80	-	34.60	7.39	35.40
PK	5.828G	125.16	Inf	-Inf	118.98	3	Vertical	76	1.80	-	34.26	7.43	35.51
AV	5.827G	112.75	Inf	-Inf	106.58	3	Vertical	76	1.80	-	34.25	7.43	35.51
PK	5.989G	62.70	68.20	-5.50	55.90	3	Vertical	76	1.80	-	34.80	7.59	35.59

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

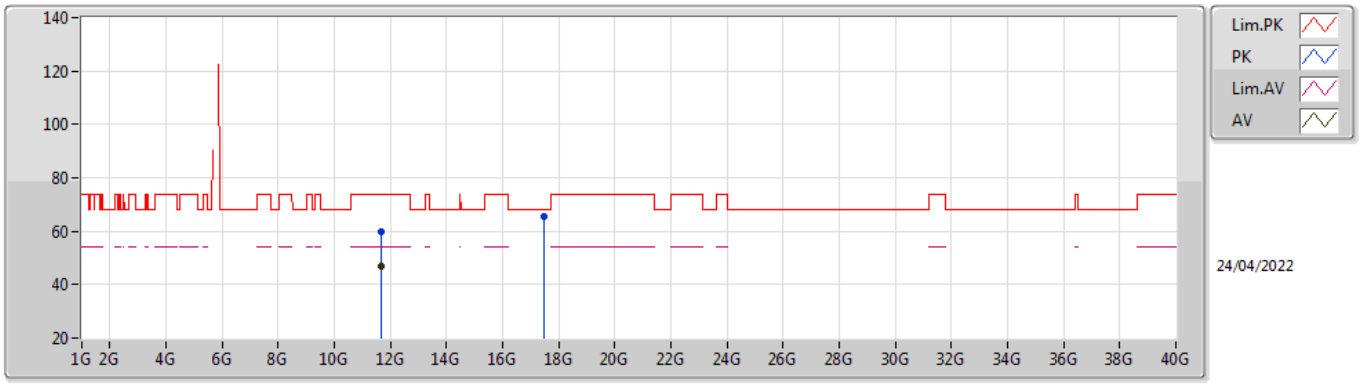


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.65544G	59.69	74.00	-14.31	45.11	3	Vertical	197	1.80	-	39.40	10.75	35.57
AV	11.65552G	46.83	54.00	-7.17	32.25	3	Vertical	197	1.80	-	39.40	10.75	35.57
PK	17.47764G	65.74	68.20	-2.46	43.92	3	Vertical	191	1.22	-	42.30	14.43	34.91

802.11ax HEW20_Nss1,(MCS0)_2TX

5825MHz_TnomVnom

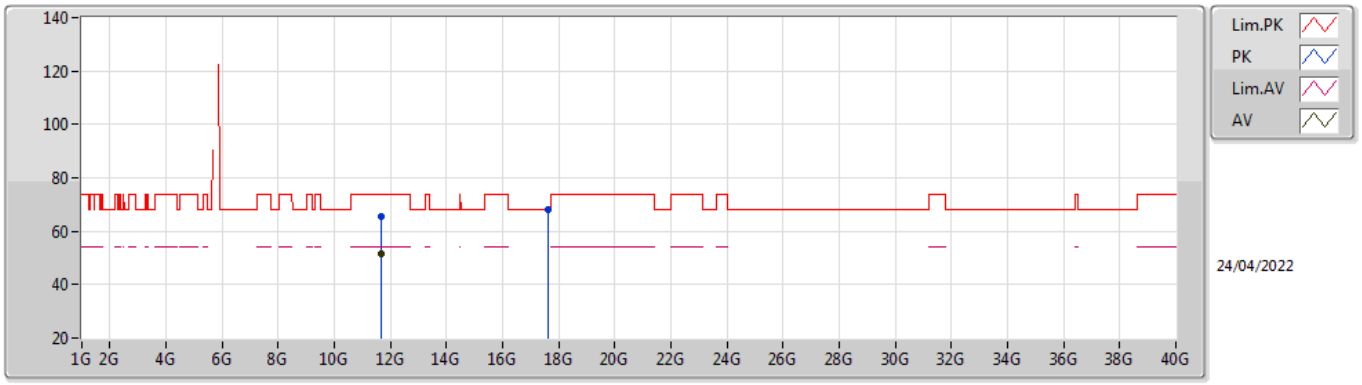


EUT Y_2TX
Setting 21.5
03-C-K-5

Type	Freq	Level	Limit	Margin	Raw	Dist	Condition	Azimuth	Height	Comment	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dBuV)	(m)		(°)	(m)		(dB)	(dB)	(dB)
PK	11.64944G	65.28	74.00	-8.72	50.70	3	Horizontal	147	1.75	-	39.40	10.75	35.57
AV	11.65944G	51.43	54.00	-2.57	36.84	3	Horizontal	147	1.75	-	39.40	10.75	35.56
PK	17.632G	67.87	68.20	-0.33	44.45	3	Horizontal	199	2.18	-	43.72	14.54	34.84

Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 5	Pass	AV	1.92003G	41.31	54.00	-12.69	Horizontal

Mode 5

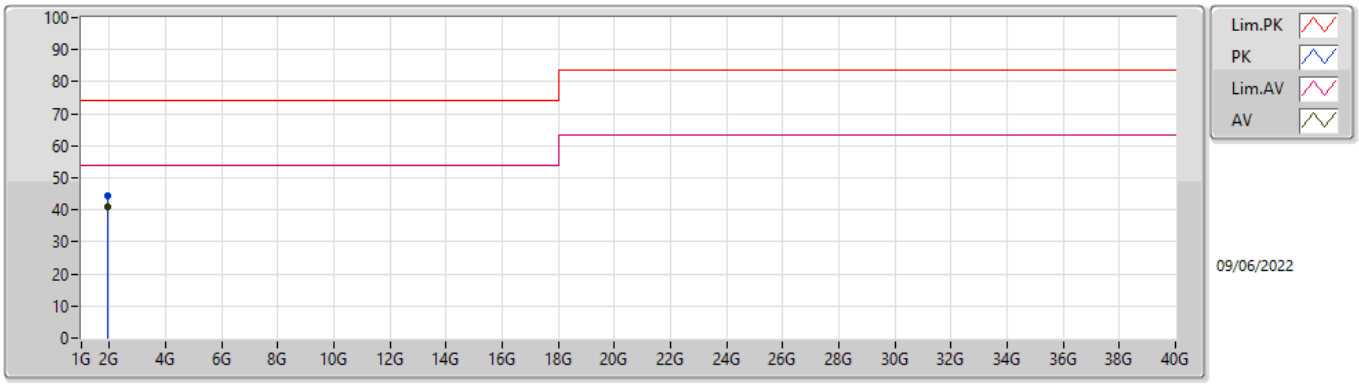

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(m)		(°)	(m)		(dBuV/m)	(dB/m)	(dB)	(dB)
PK	1.91998G	44.51	74.00	-29.49	-4.72	3	Vertical	152	1.83	-	49.23	27.06	3.02	34.80
AV	1.91998G	40.77	54.00	-13.23	-4.72	3	Vertical	152	1.83	"Worst"	45.49	27.06	3.02	34.80

Mode 5

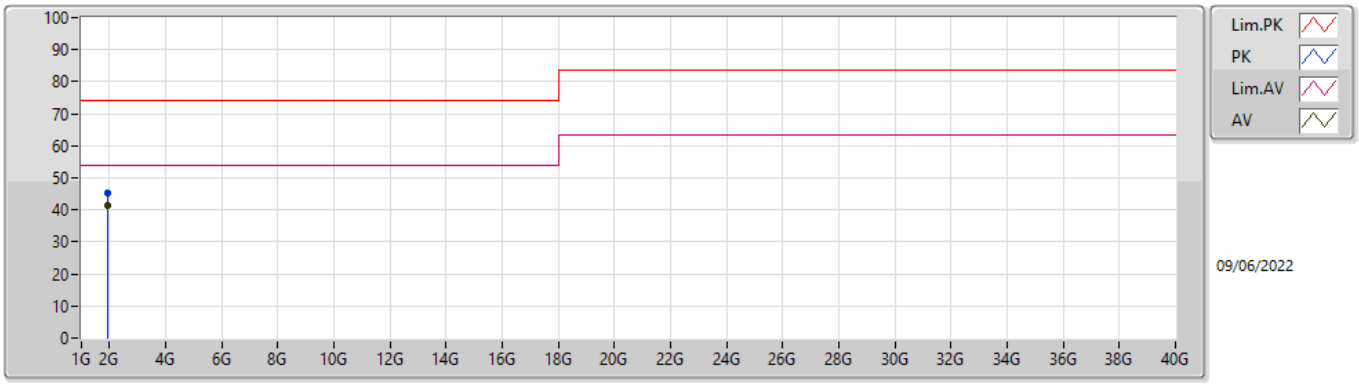

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(m)		(°)	(m)		(dBuV/m)	(dB/m)	(dB)	(dB)
PK	1.91996G	45.26	74.00	-28.74	-4.72	3	Horizontal	124	2.26	-	49.98	27.06	3.02	34.80
AV	1.92003G	41.31	54.00	-12.69	-4.72	3	Horizontal	124	2.26	"Worst"	46.03	27.06	3.02	34.80


1. Photographs of Conducted Emissions Test Configuration

Test Mode: Mode 2

FRONT VIEW



REAR VIEW

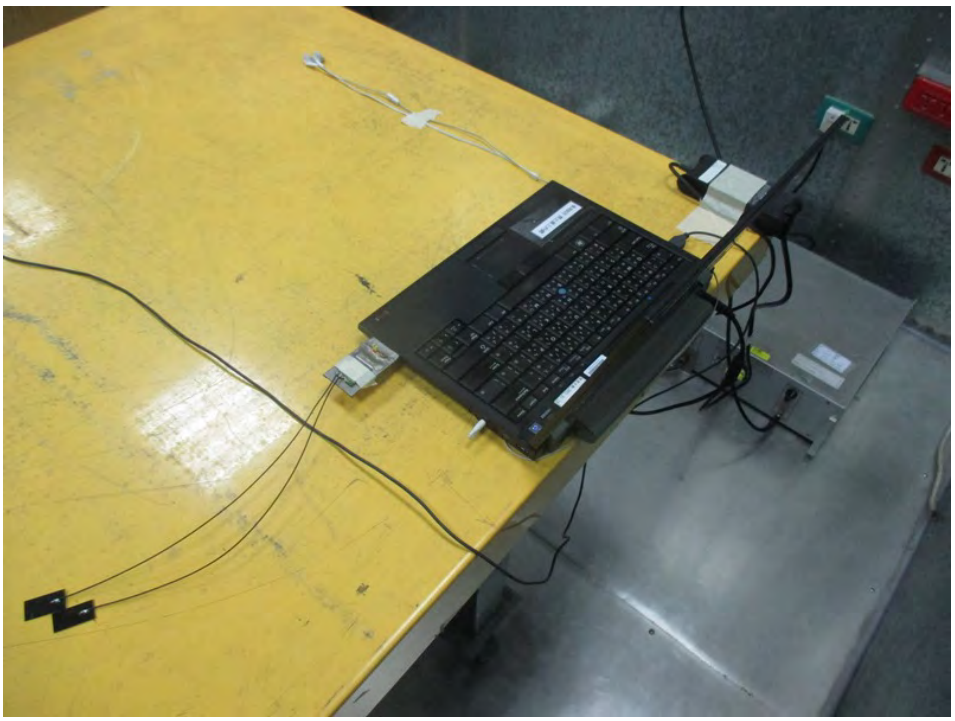


CLOSE VIEW


NFA652C00_2V0
rs50.8v1Ev1Rv1
W: 00e04c0c0363
B: 00e04c8c0363


2. Photographs of Radiated Emissions Test Configuration

Test Configuration: 30MHz~1GHz / Test Mode: Mode 3

FRONT VIEW

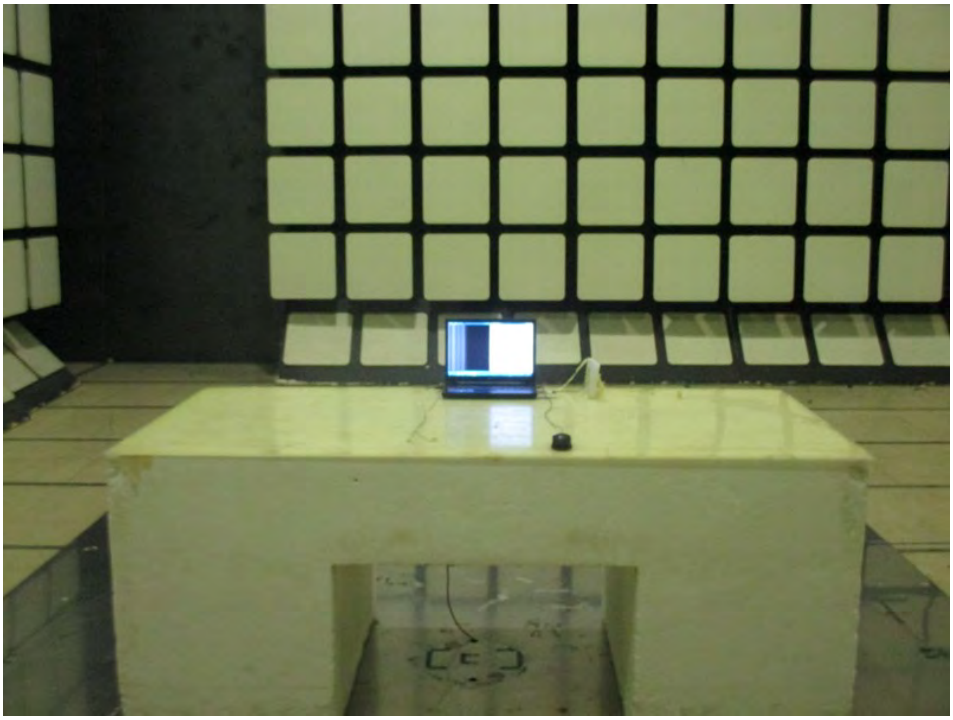

REAR VIEW

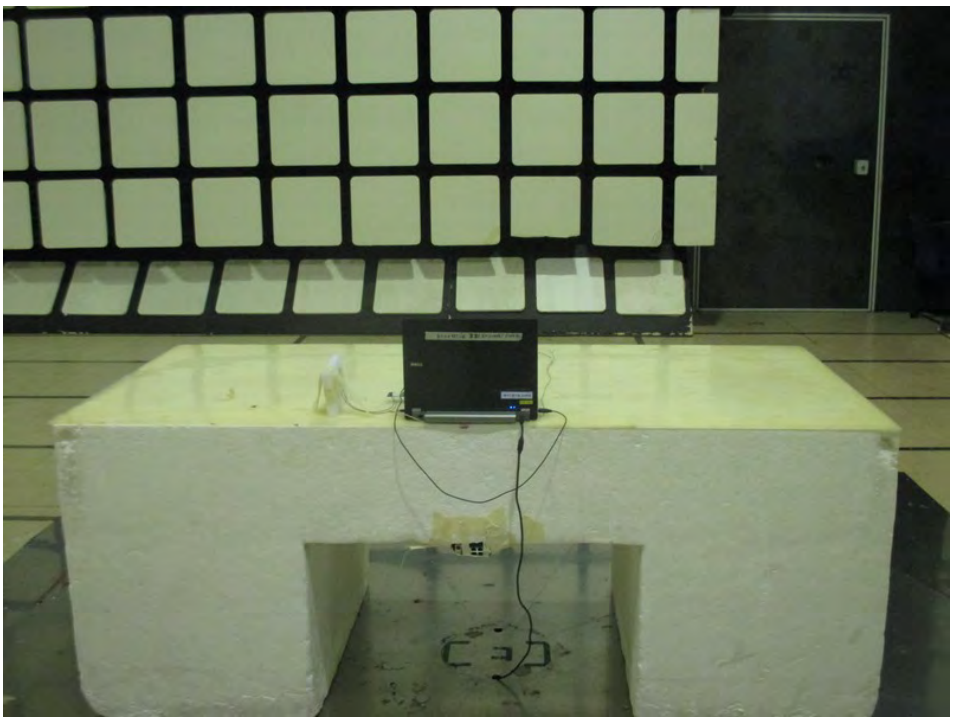

CLOSE VIEW




Test Configuration: Above 1GHz


Test Mode: Mode 1

For 1TX/2TX


FRONT VIEW

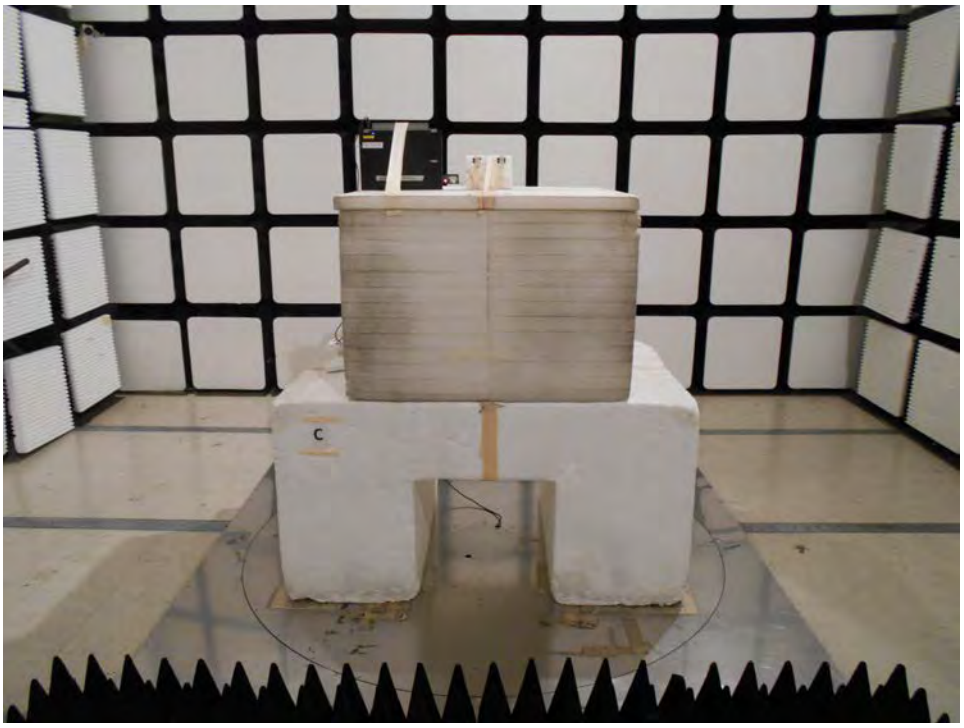

REAR VIEW

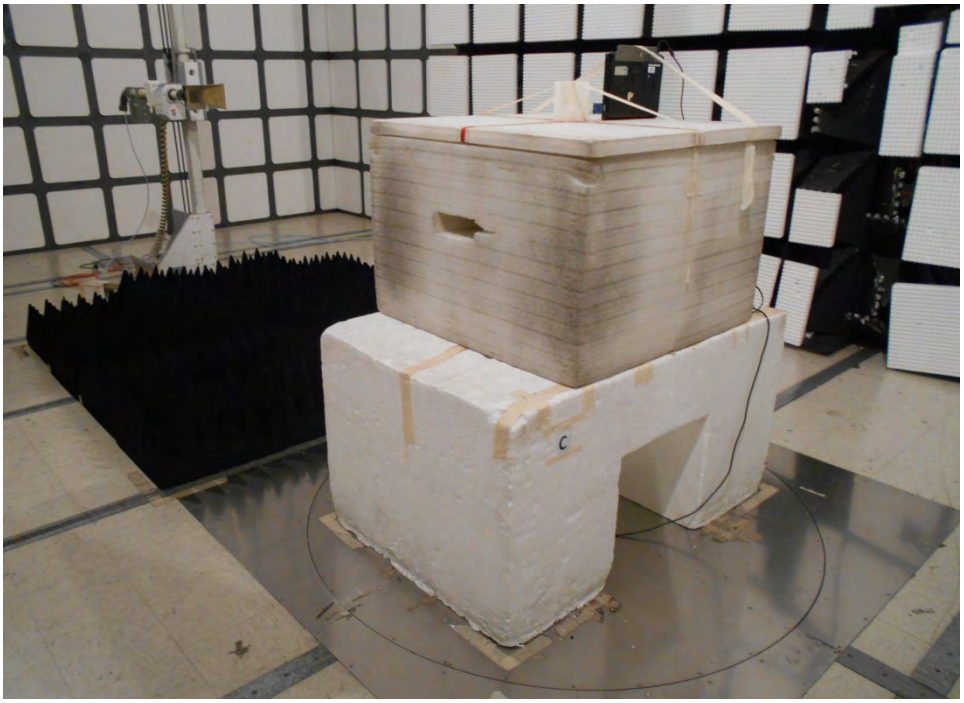

CLOSE VIEW

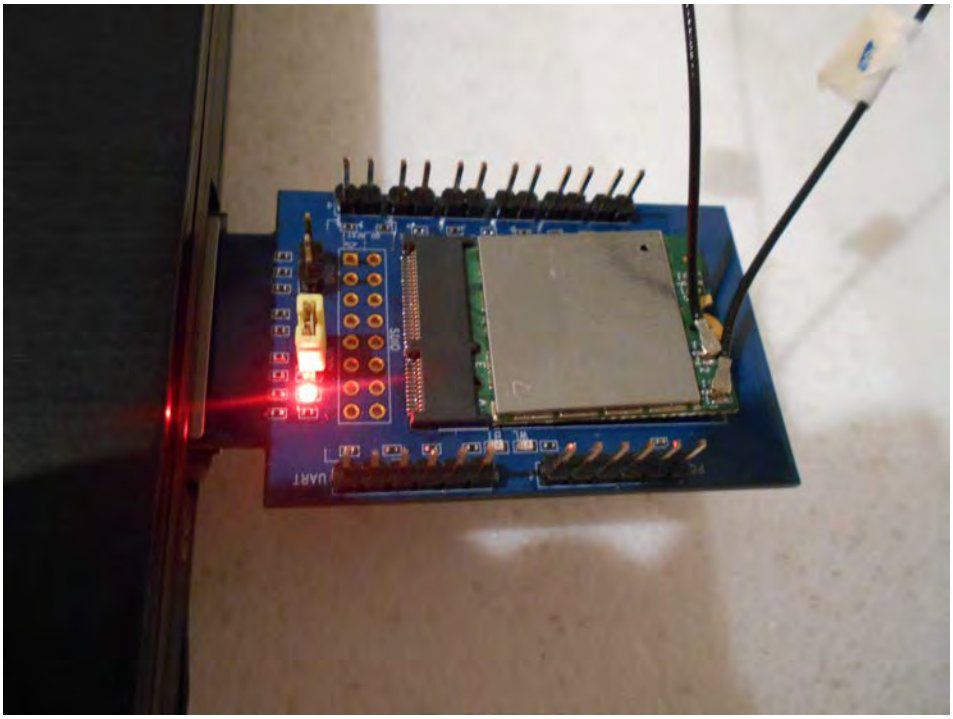


Test Mode: Mode 2

For 1TX

For Bandedge

FRONT VIEW

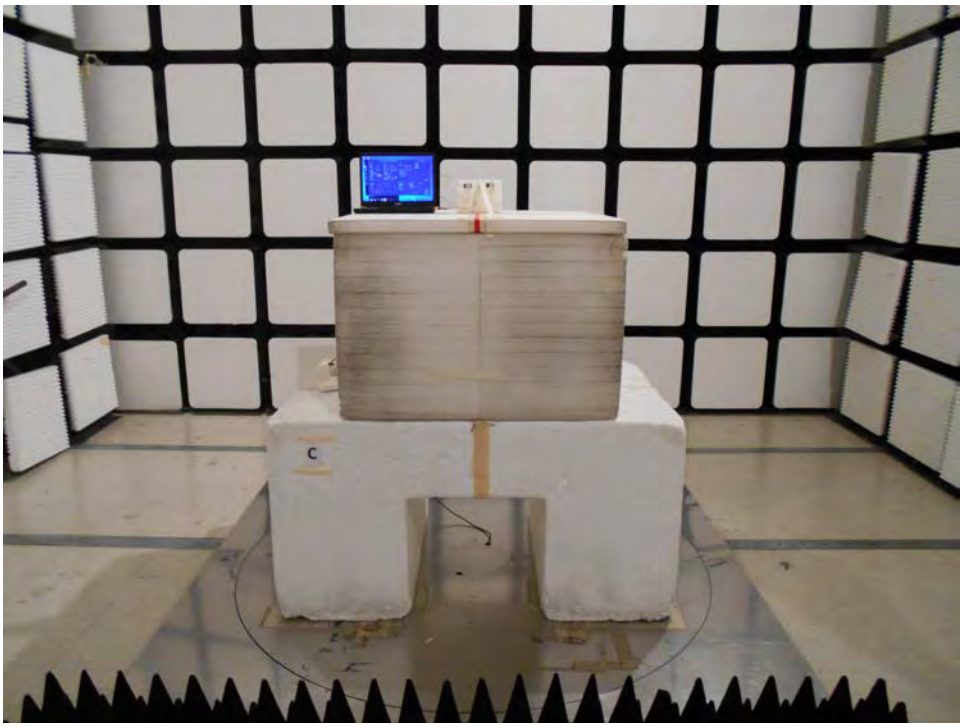


REAR VIEW




For Harmonic

FRONT VIEW

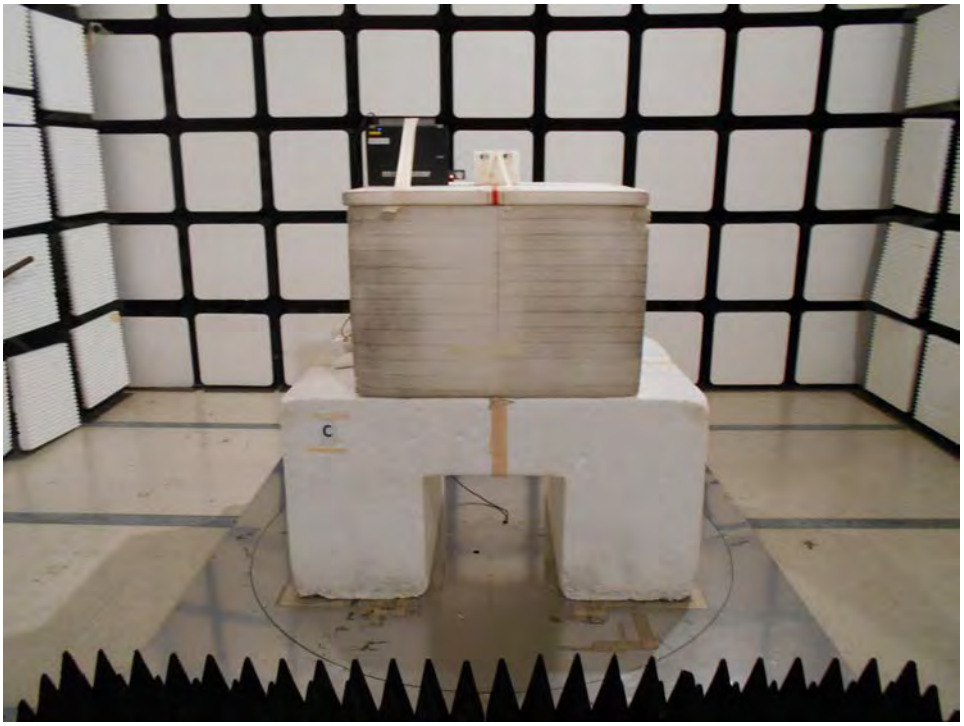


REAR VIEW

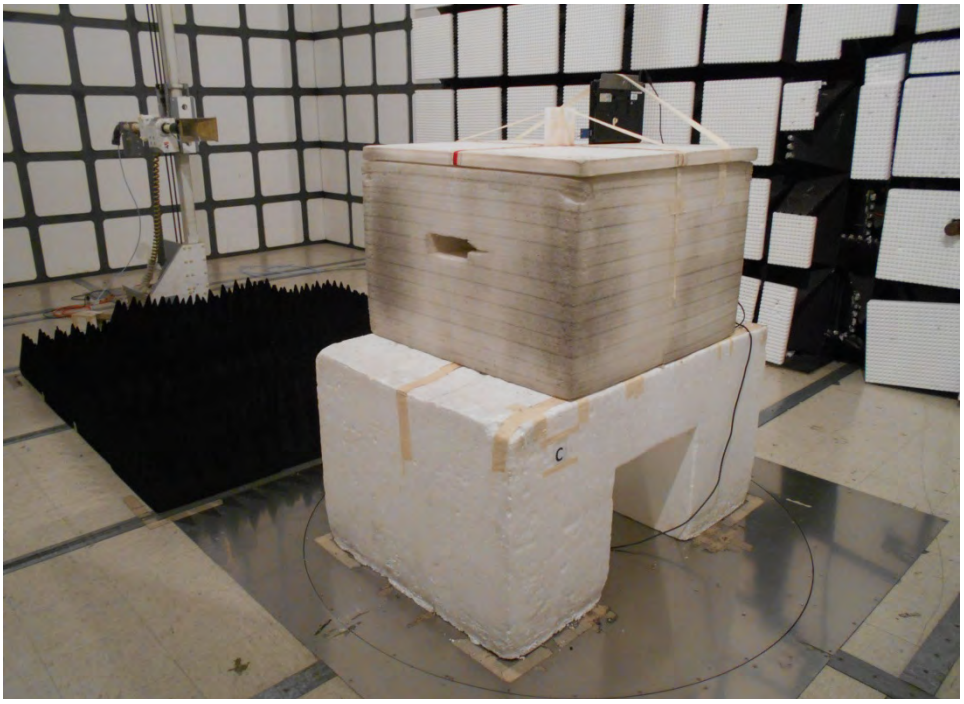


For 2TX


FRONT VIEW

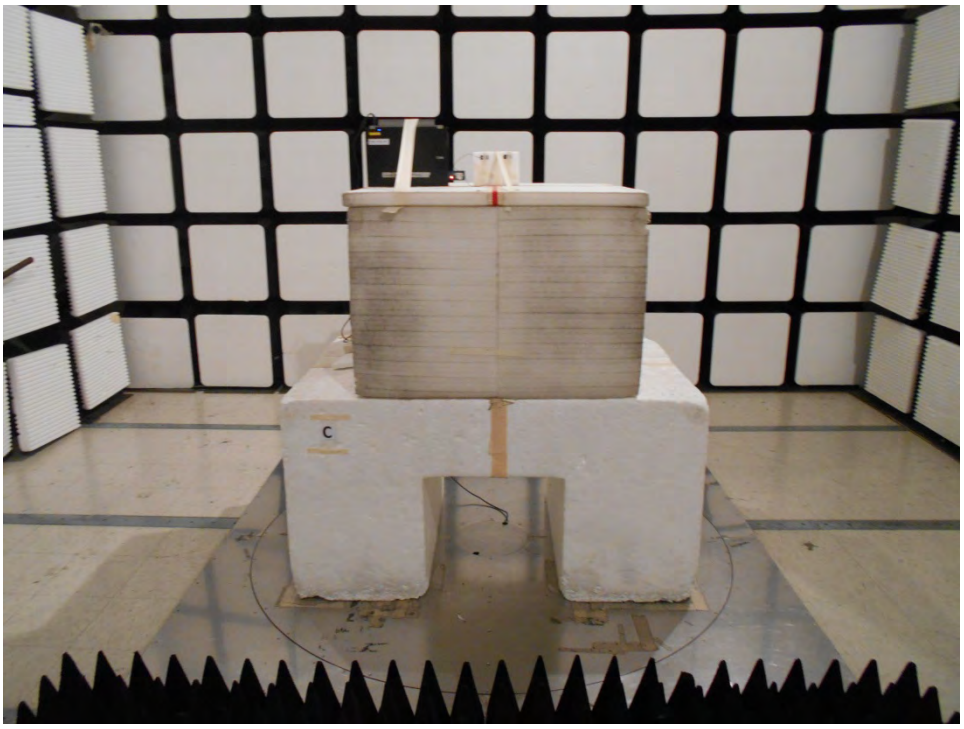

REAR VIEW

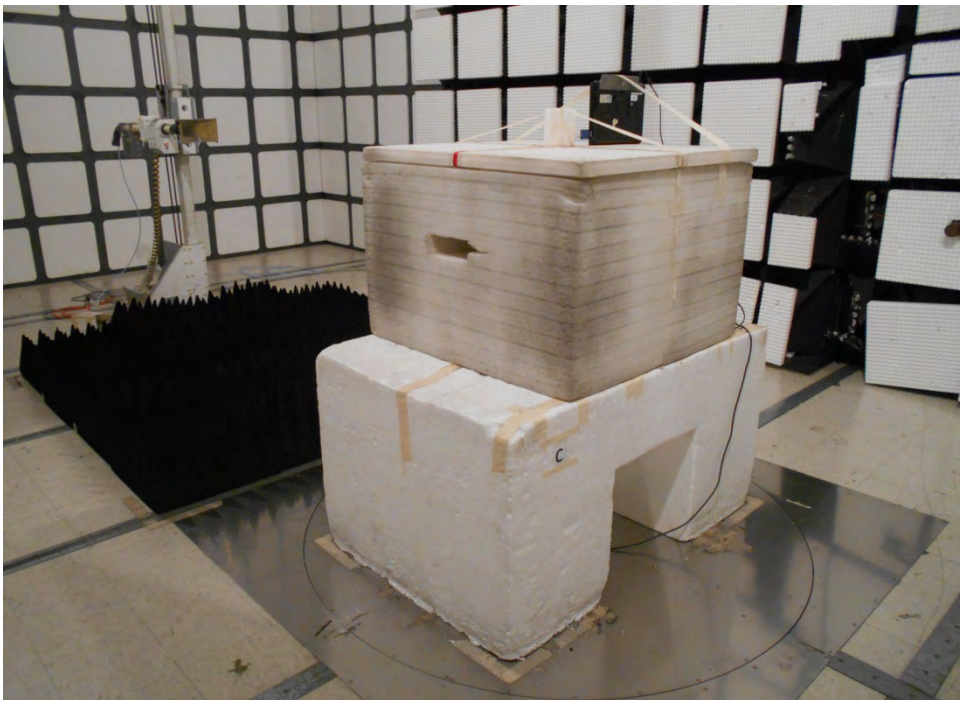


CLOSE VIEW

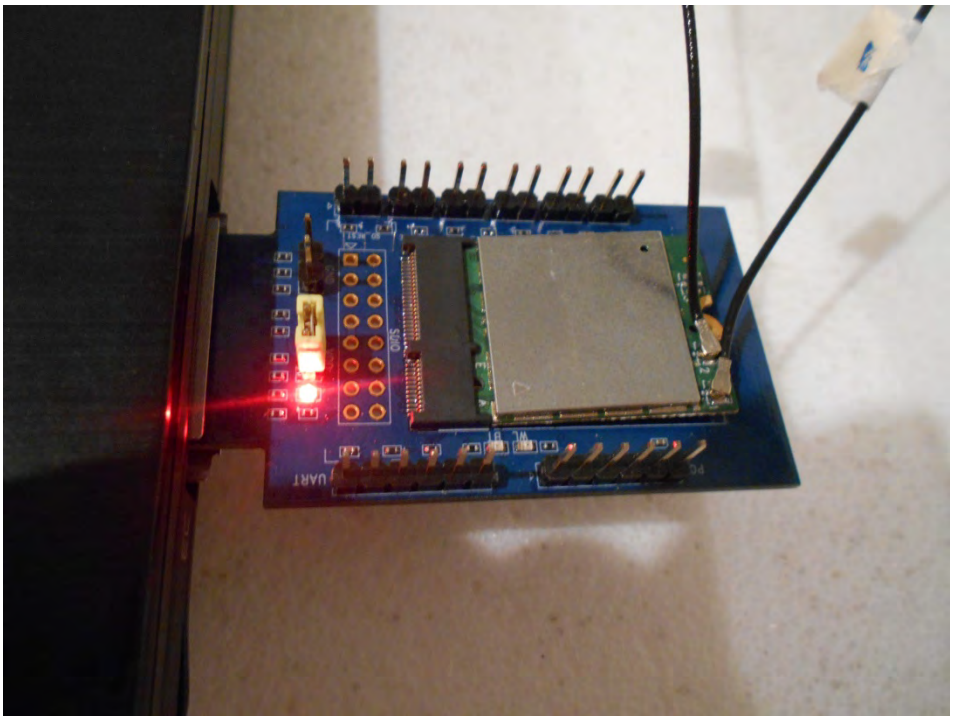


Test Mode: Mode 3

For 1TX

FRONT VIEW

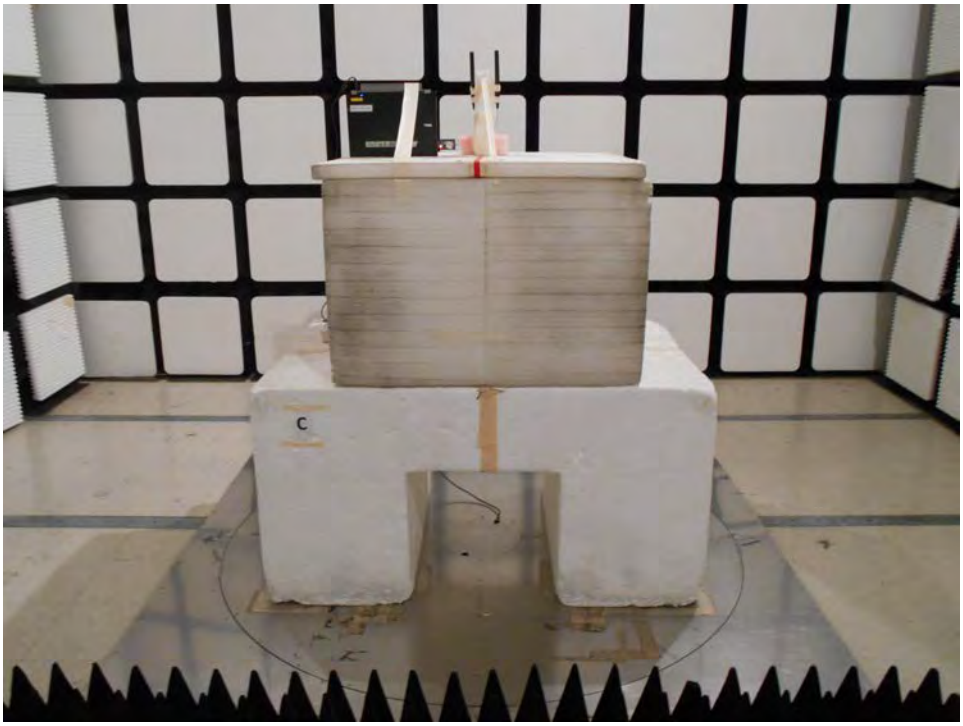


REAR VIEW

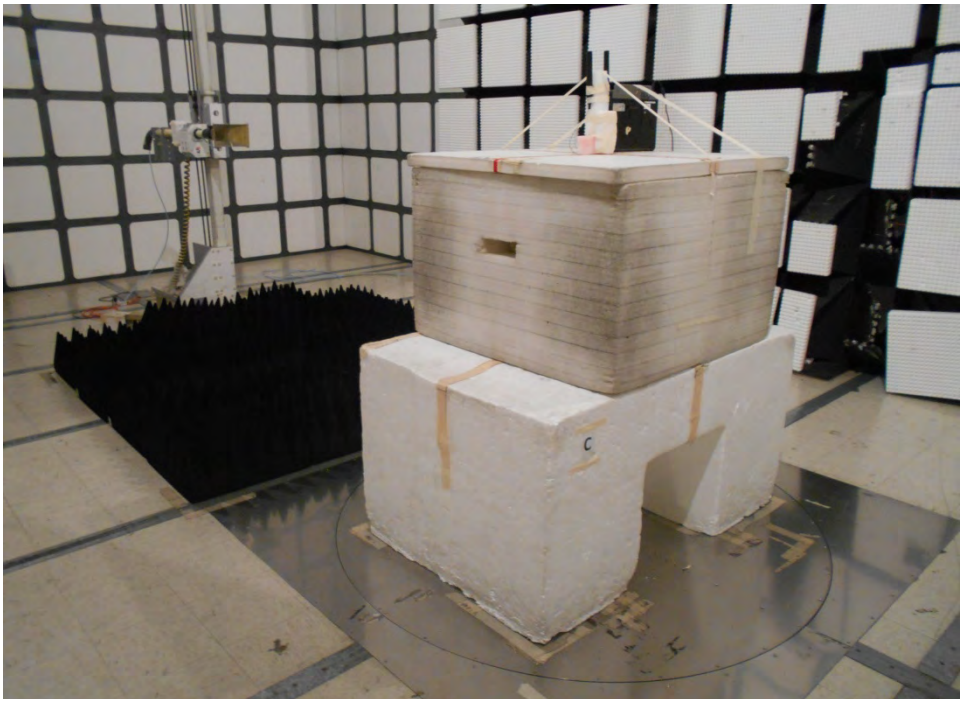


For 2TX


FRONT VIEW

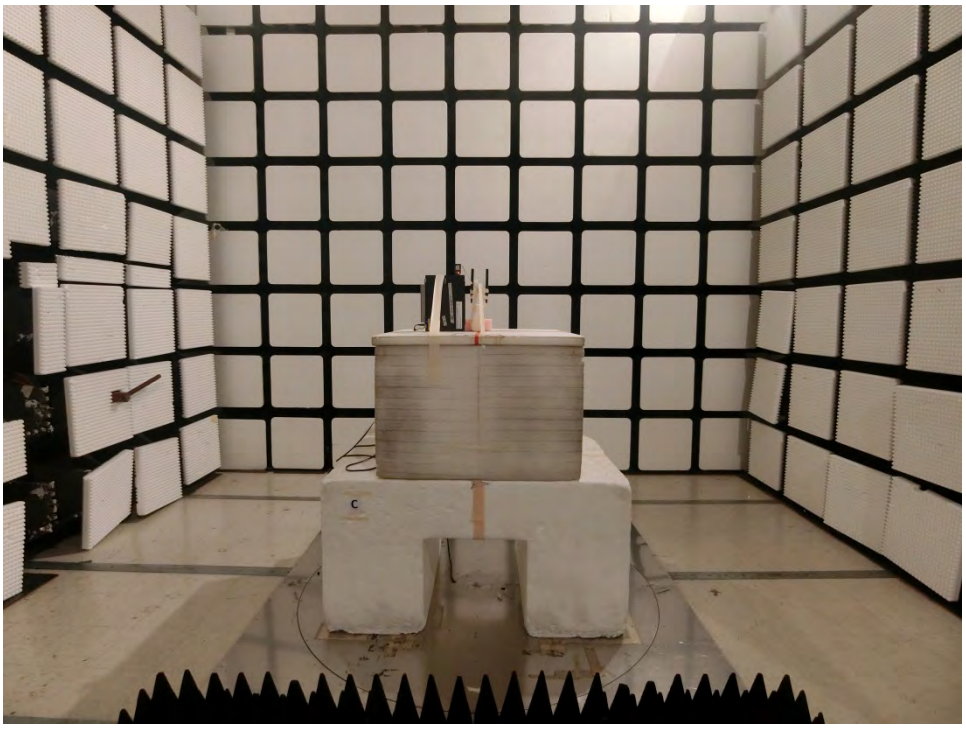

REAR VIEW

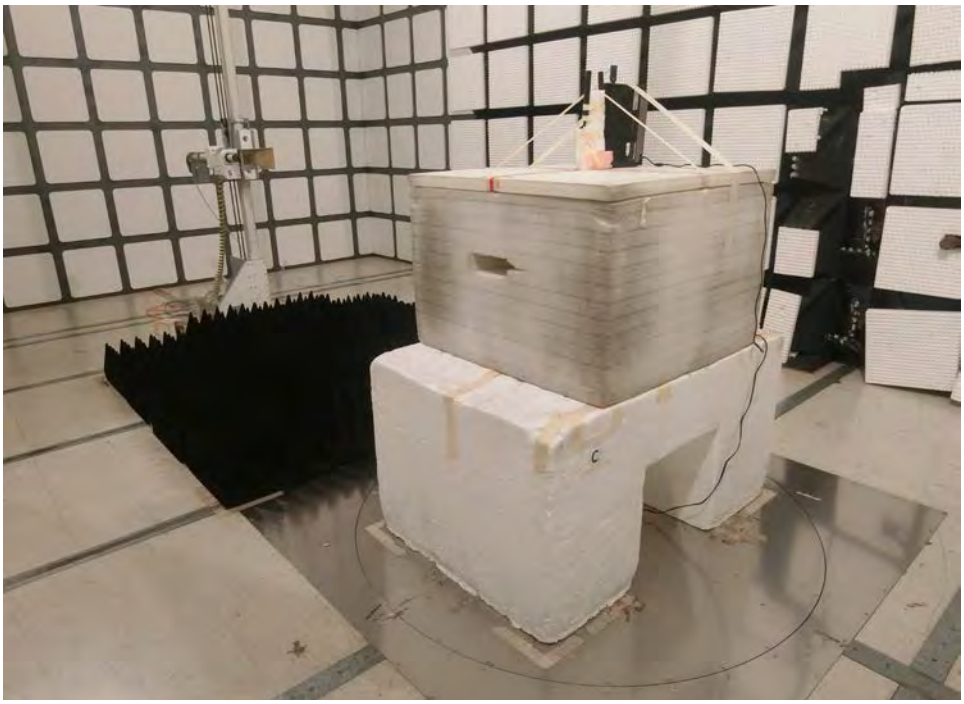

CLOSE VIEW

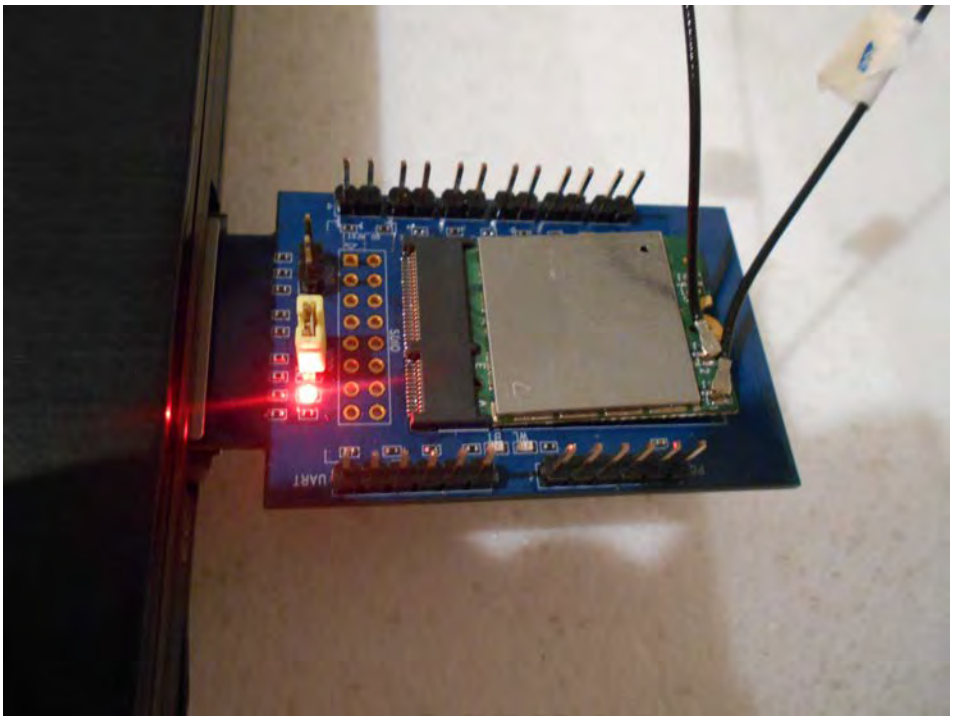

———THE END———